




6dB emission bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	15.08	5737.48	5752.56	0.5	PASS
		5785	15.12	5777.44	5792.56	0.5	PASS
		5825	15.68	5817.08	5832.76	0.5	PASS
11N20	Ant1	5745	16.68	5736.64	5753.32	0.5	PASS
		5785	15.68	5777.52	5793.20	0.5	PASS
		5825	15.72	5817.04	5832.76	0.5	PASS
11N40	Ant1	5755	35.36	5737.40	5772.76	0.5	PASS
		5795	35.52	5777.24	5812.76	0.5	PASS
11AC40	Ant1	5755	35.12	5737.40	5772.52	0.5	PASS
		5795	35.52	5777.40	5812.92	0.5	PASS
11AC80	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS





Test Graphs

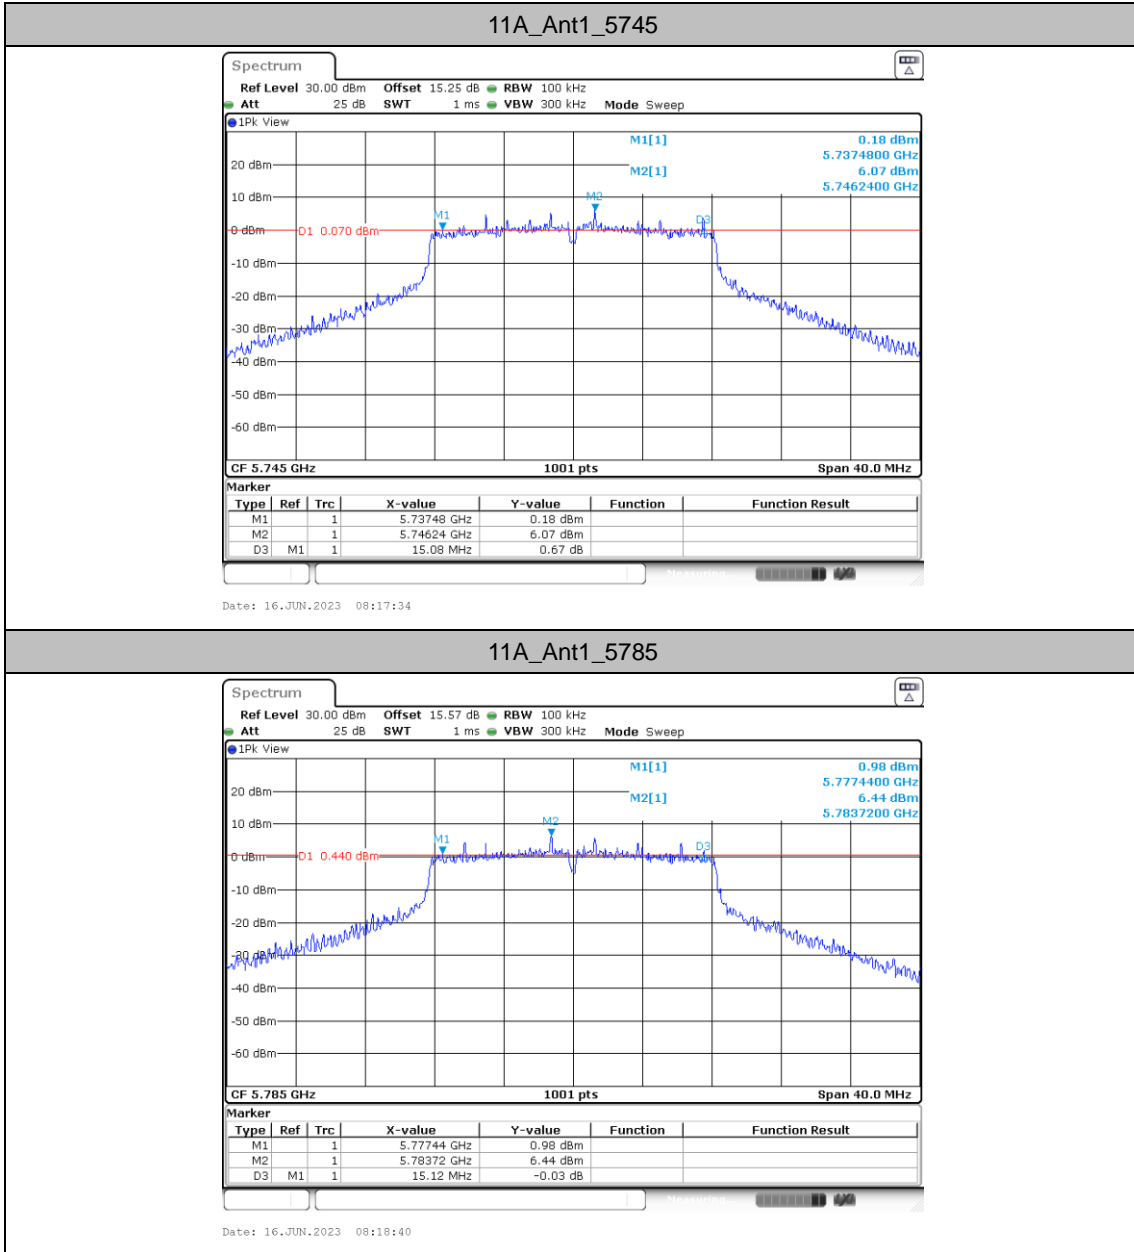


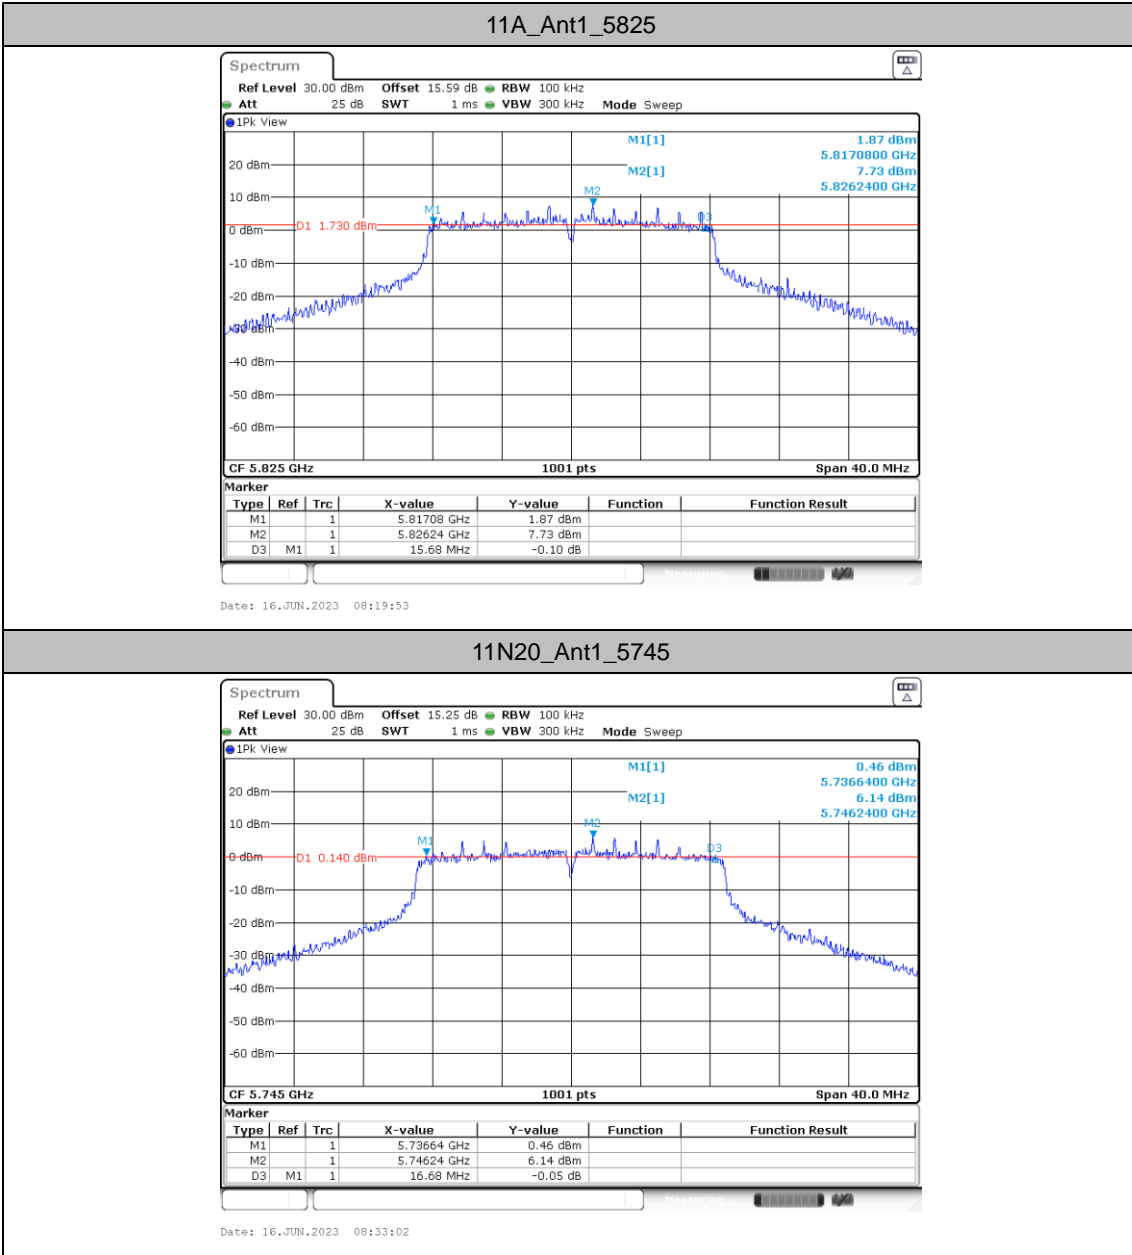

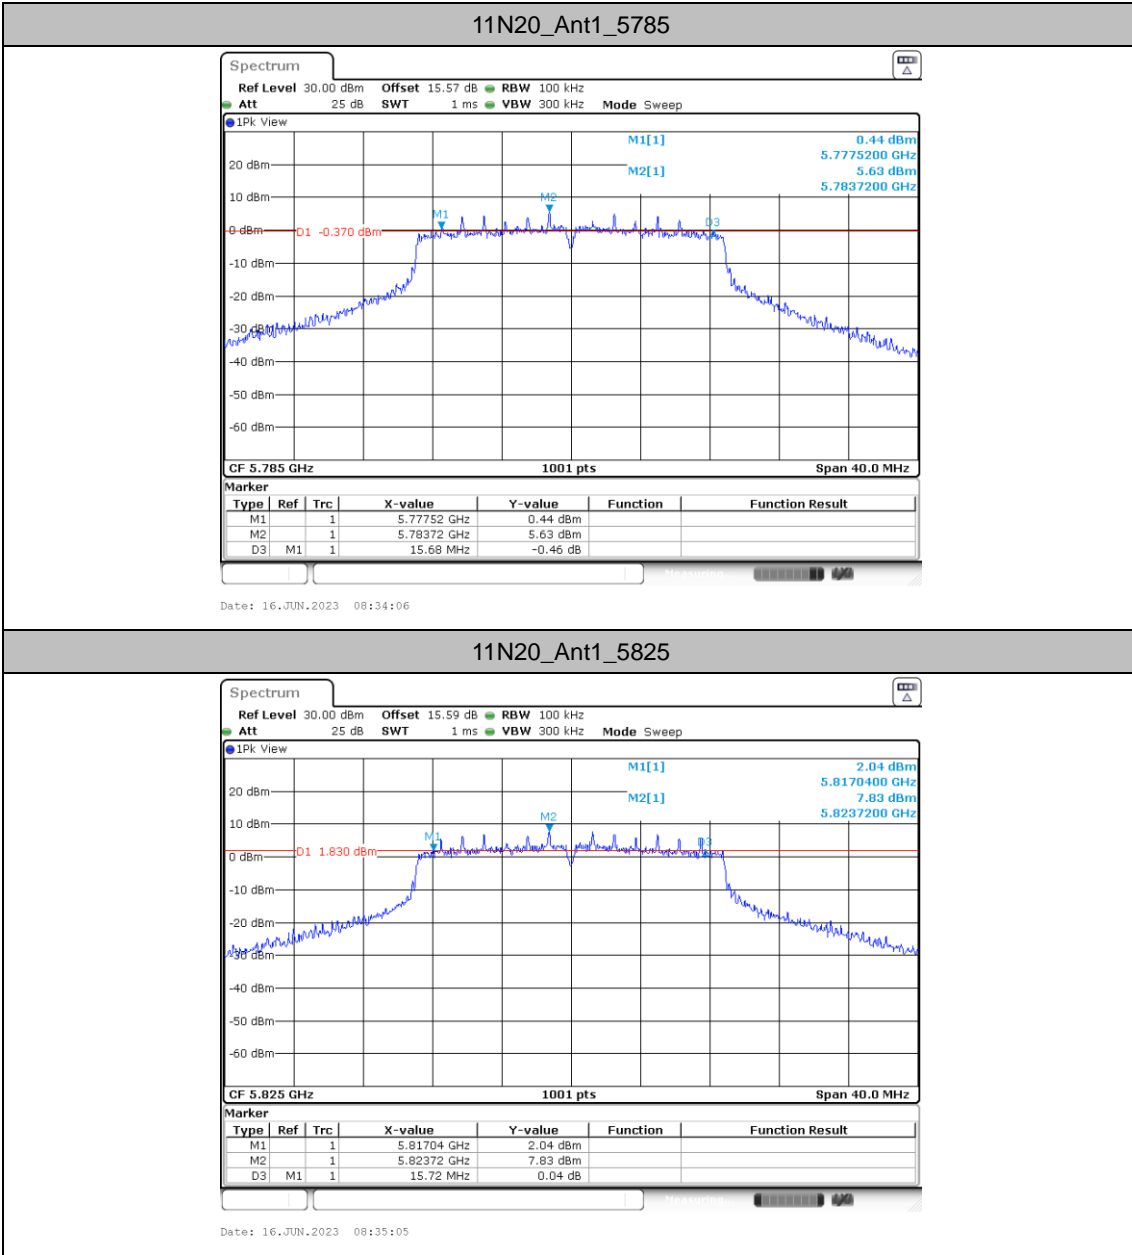

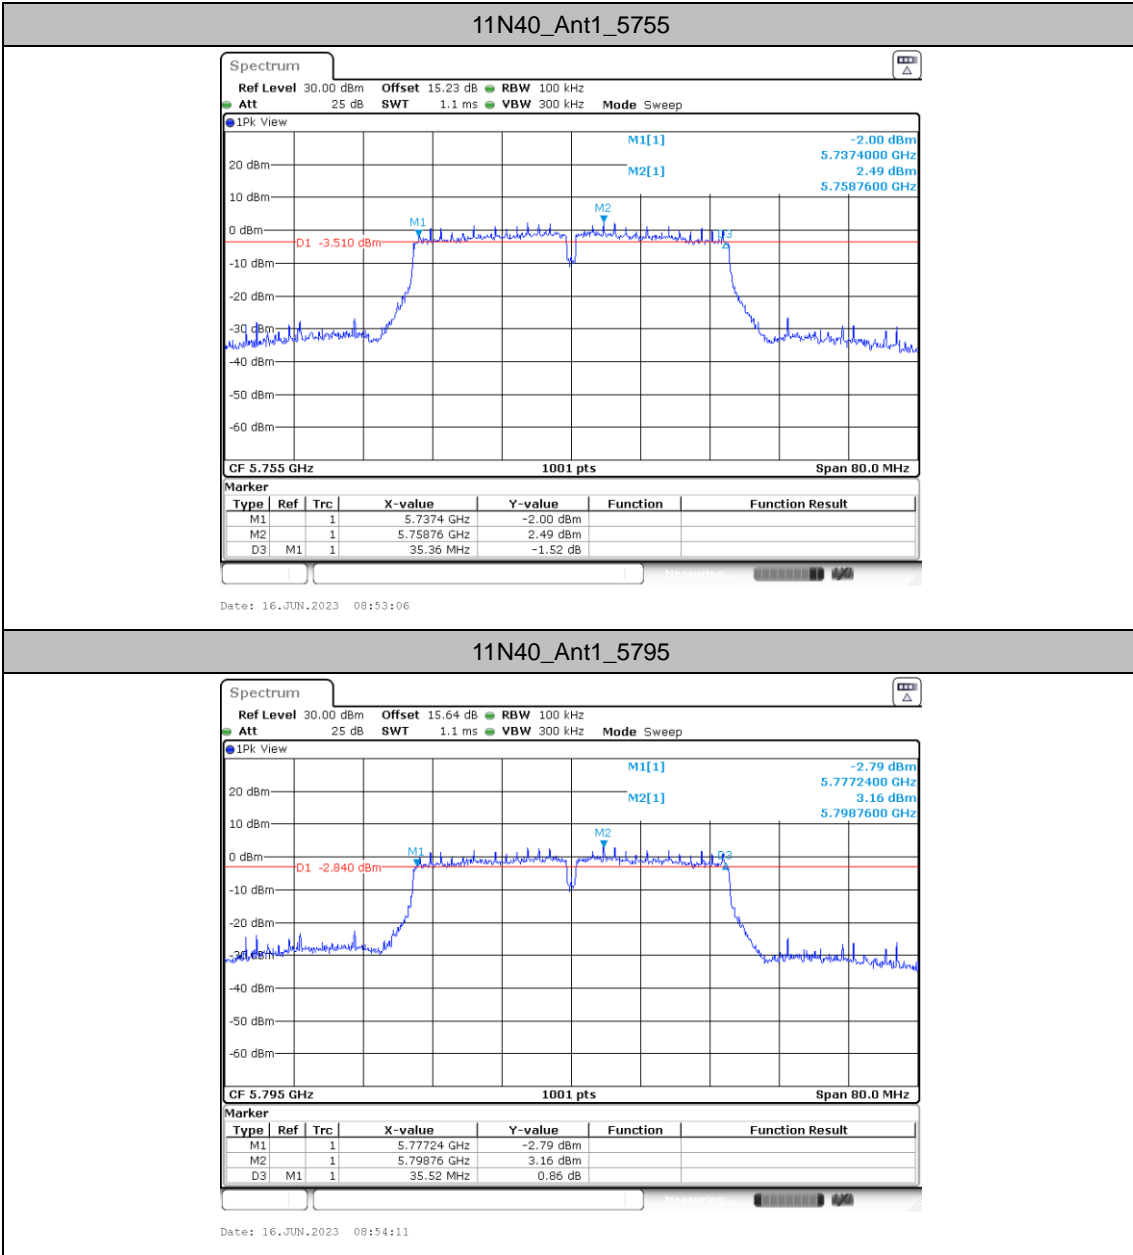

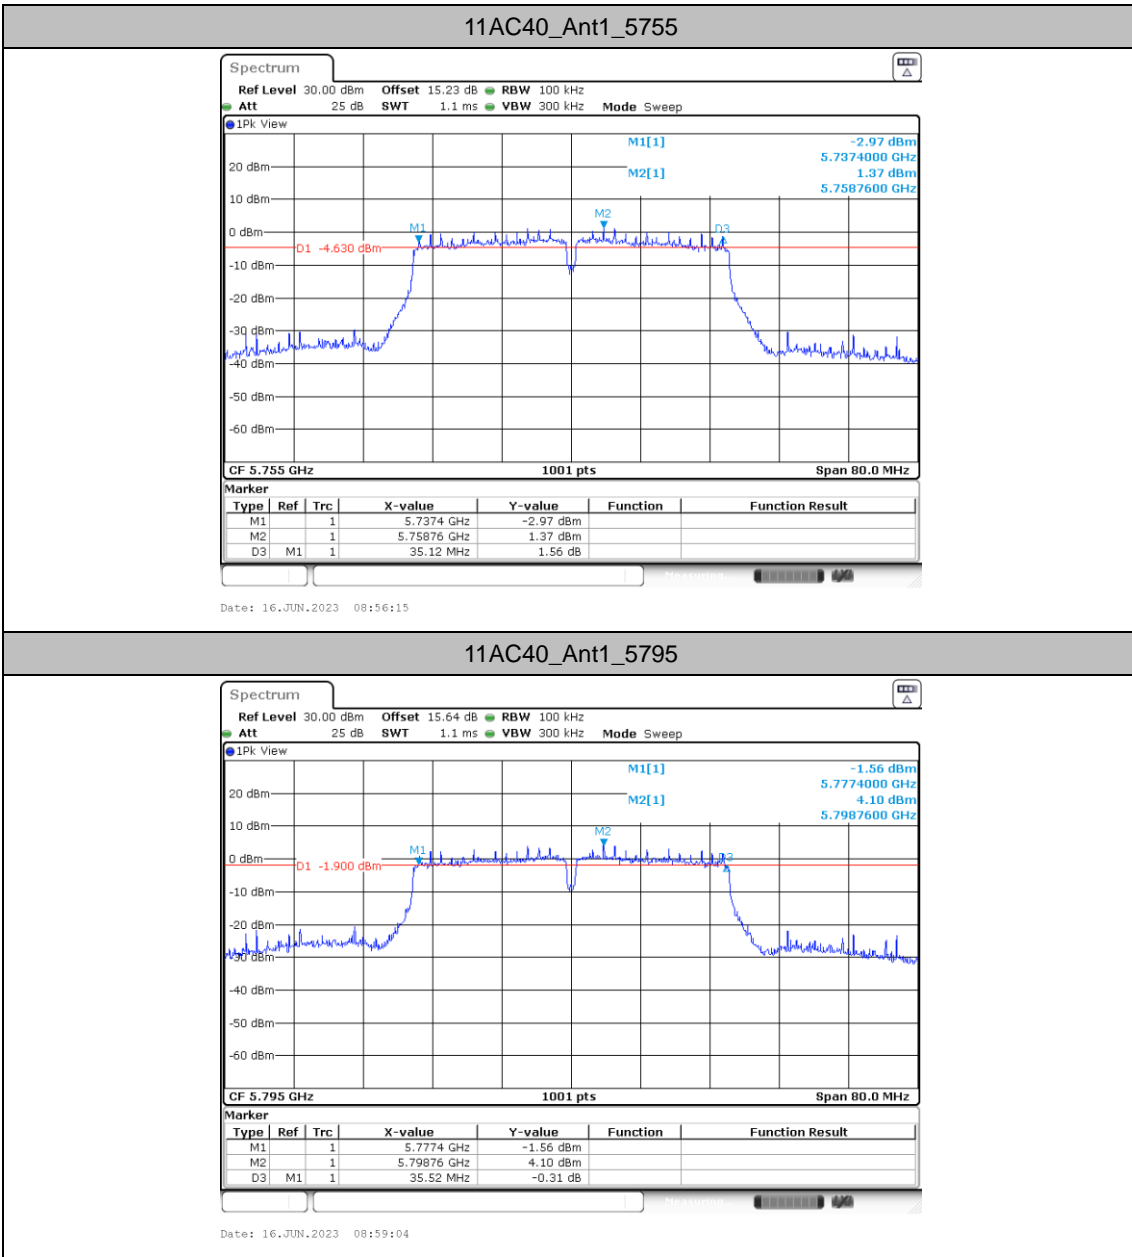

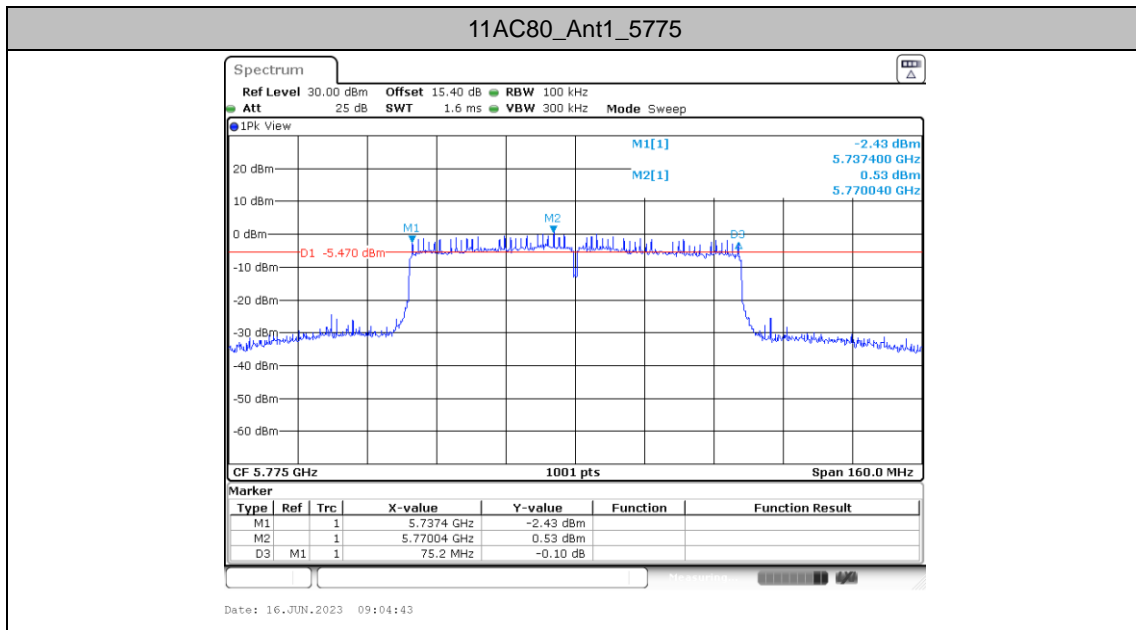



Power spectral density

Test Result


Test Mode	Antenna	Freq (MHz)	Result [dBm/MHz]	FCC Limit [dBm/MHz]	IC Limit [dBm/MHz]	EIRP [dBm/MHz]	IC EIRP Limit [dBm/MHz]	Verdict
11A	Ant1	5180	5.14	≤11.00	---	6.04	≤10.00	PASS
		5220	5.8	≤11.00	---	6.7	≤10.00	PASS
		5240	6.16	≤11.00	---	7.06	≤10.00	PASS
		5260	5.93	≤11.00	≤11.00	---	---	PASS
		5300	6.08	≤11.00	≤11.00	---	---	PASS
		5320	6.12	≤11.00	≤11.00	---	---	PASS
		5500	6.29	≤11.00	≤11.00	---	---	PASS
		5580	5.21	≤11.00	≤11.00	---	---	PASS
		5700	6.12	≤11.00	≤11.00	---	---	PASS
		5745	1.69	≤30.00	≤30.00	---	---	PASS
		5785	2.23	≤30.00	≤30.00	---	---	PASS
5825	2.66	≤30.00	≤30.00	---	---	PASS		
11N20	Ant1	5180	3.33	≤11.00	---	4.23	≤10.00	PASS
		5220	4.54	≤11.00	---	5.44	≤10.00	PASS
		5240	4.92	≤11.00	---	5.82	≤10.00	PASS
		5260	5.14	≤11.00	≤11.00	---	---	PASS
		5300	5.23	≤11.00	≤11.00	---	---	PASS
		5320	4.86	≤11.00	≤11.00	---	---	PASS
		5500	4.97	≤11.00	≤11.00	---	---	PASS
		5580	3.98	≤11.00	≤11.00	---	---	PASS
		5700	2.86	≤11.00	≤11.00	---	---	PASS
		5745	1.8	≤30.00	≤30.00	---	---	PASS
		5785	0.84	≤30.00	≤30.00	---	---	PASS
5825	3.1	≤30.00	≤30.00	---	---	PASS		
11N40	Ant1	5190	-3.48	≤11.00	---	-2.58	≤10.00	PASS
		5230	0.66	≤11.00	---	1.56	≤10.00	PASS
		5270	-0.07	≤11.00	≤11.00	---	---	PASS
		5310	-2.52	≤11.00	≤11.00	---	---	PASS
		5510	-0.25	≤11.00	≤11.00	---	---	PASS
		5550	0.8	≤11.00	≤11.00	---	---	PASS
		5670	2.58	≤11.00	≤11.00	---	---	PASS
		5755	-1.61	≤30.00	≤30.00	---	---	PASS
		5795	-0.98	≤30.00	≤30.00	---	---	PASS
11AC40	Ant1	5755	-2.83	≤30.00	≤30.00	---	---	PASS
		5795	-0.11	≤30.00	≤30.00	---	---	PASS
11AC80	Ant1	5210	-6.93	≤11.00	---	-6.03	≤10.00	PASS
		5290	-6.24	≤11.00	≤11.00	---	---	PASS
		5530	-6.03	≤11.00	≤11.00	---	---	PASS
		5610	-1.25	≤11.00	≤11.00	---	---	PASS
		5775	-4.01	≤30.00	≤30.00	---	---	PASS


Note: 1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2. The Duty Cycle Factor and is compensated in the graph.





Test Graphs

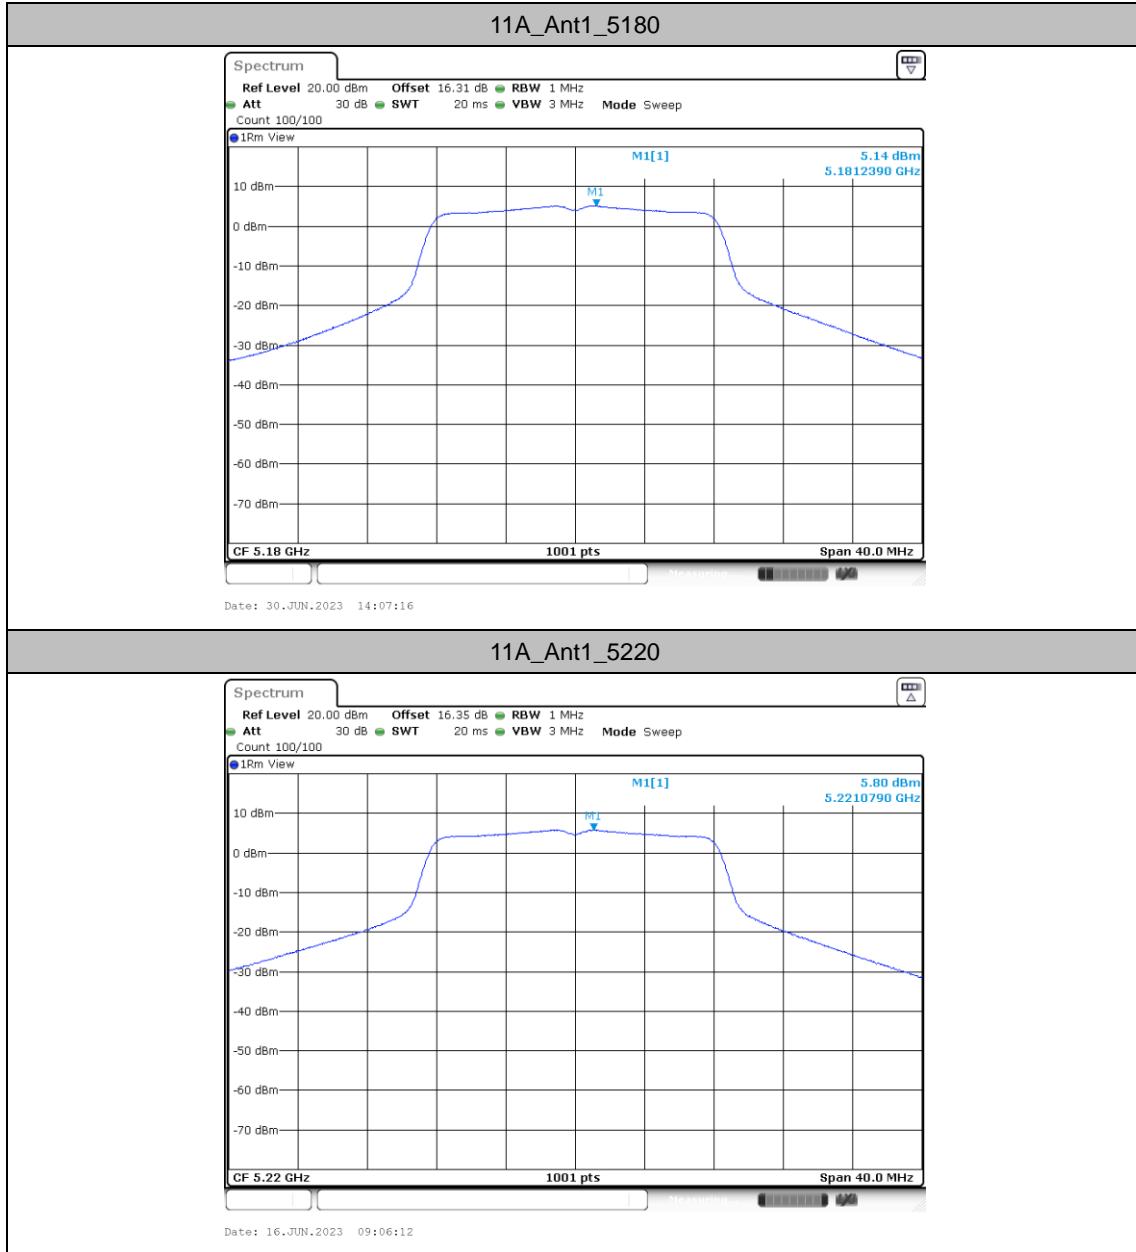


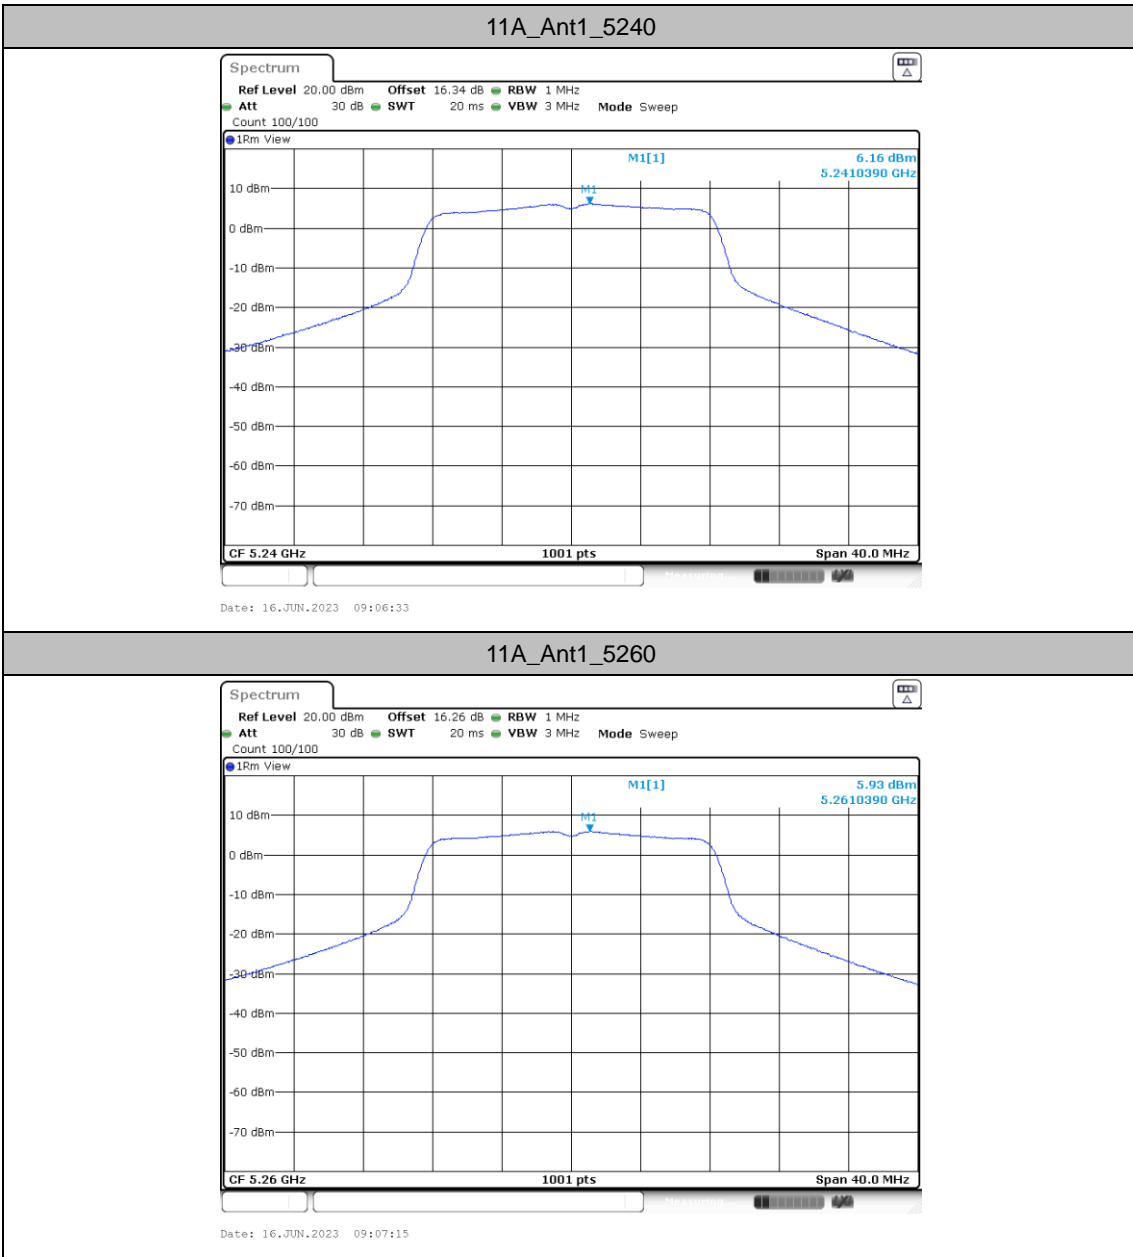


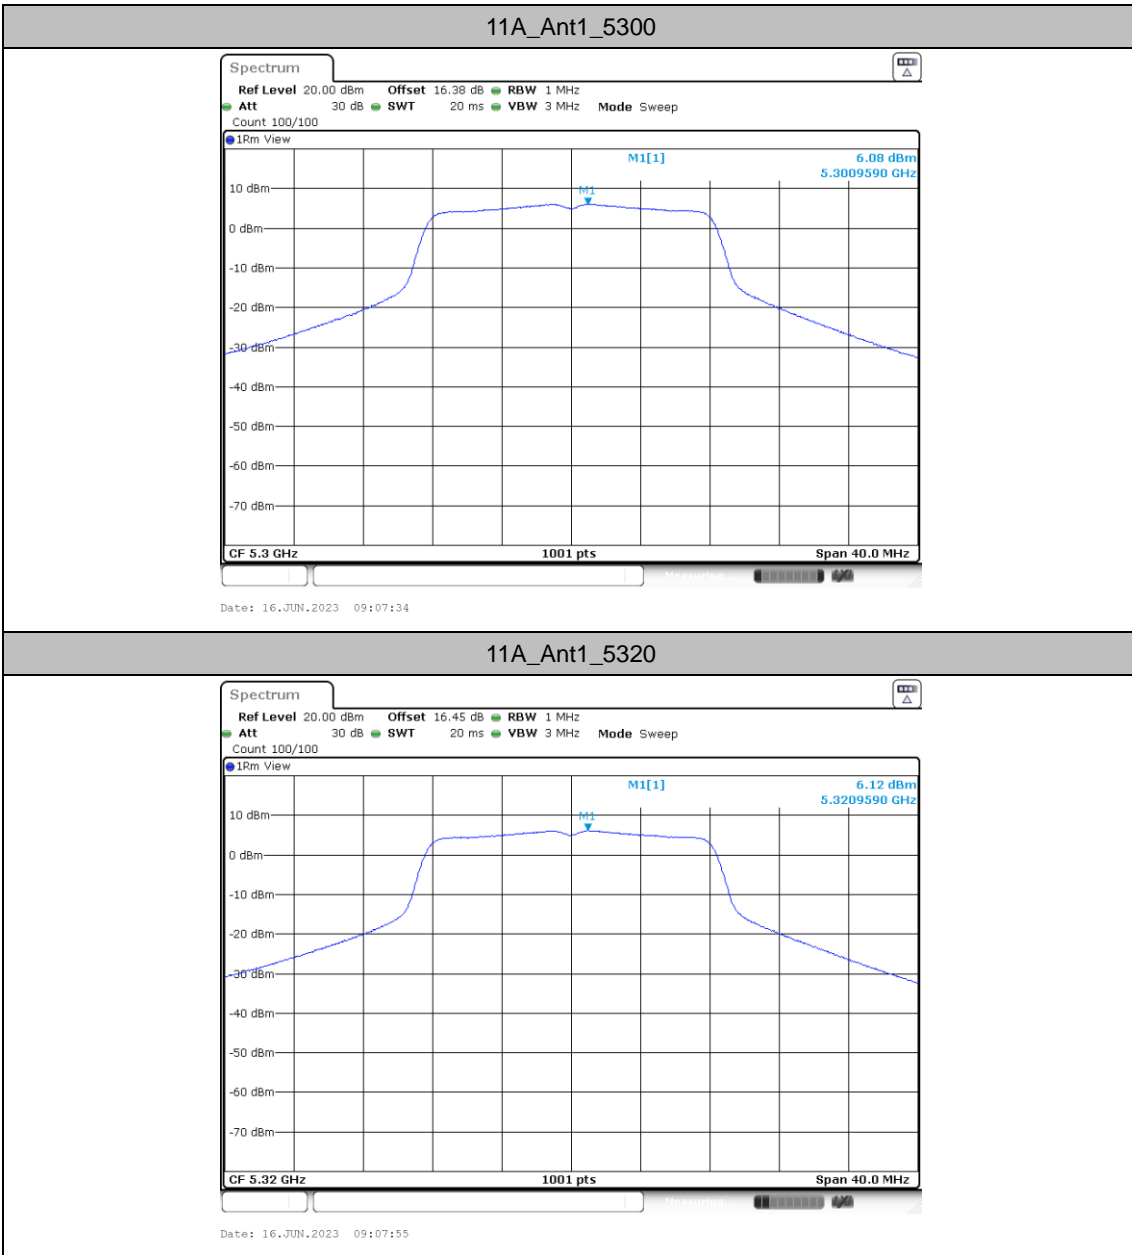


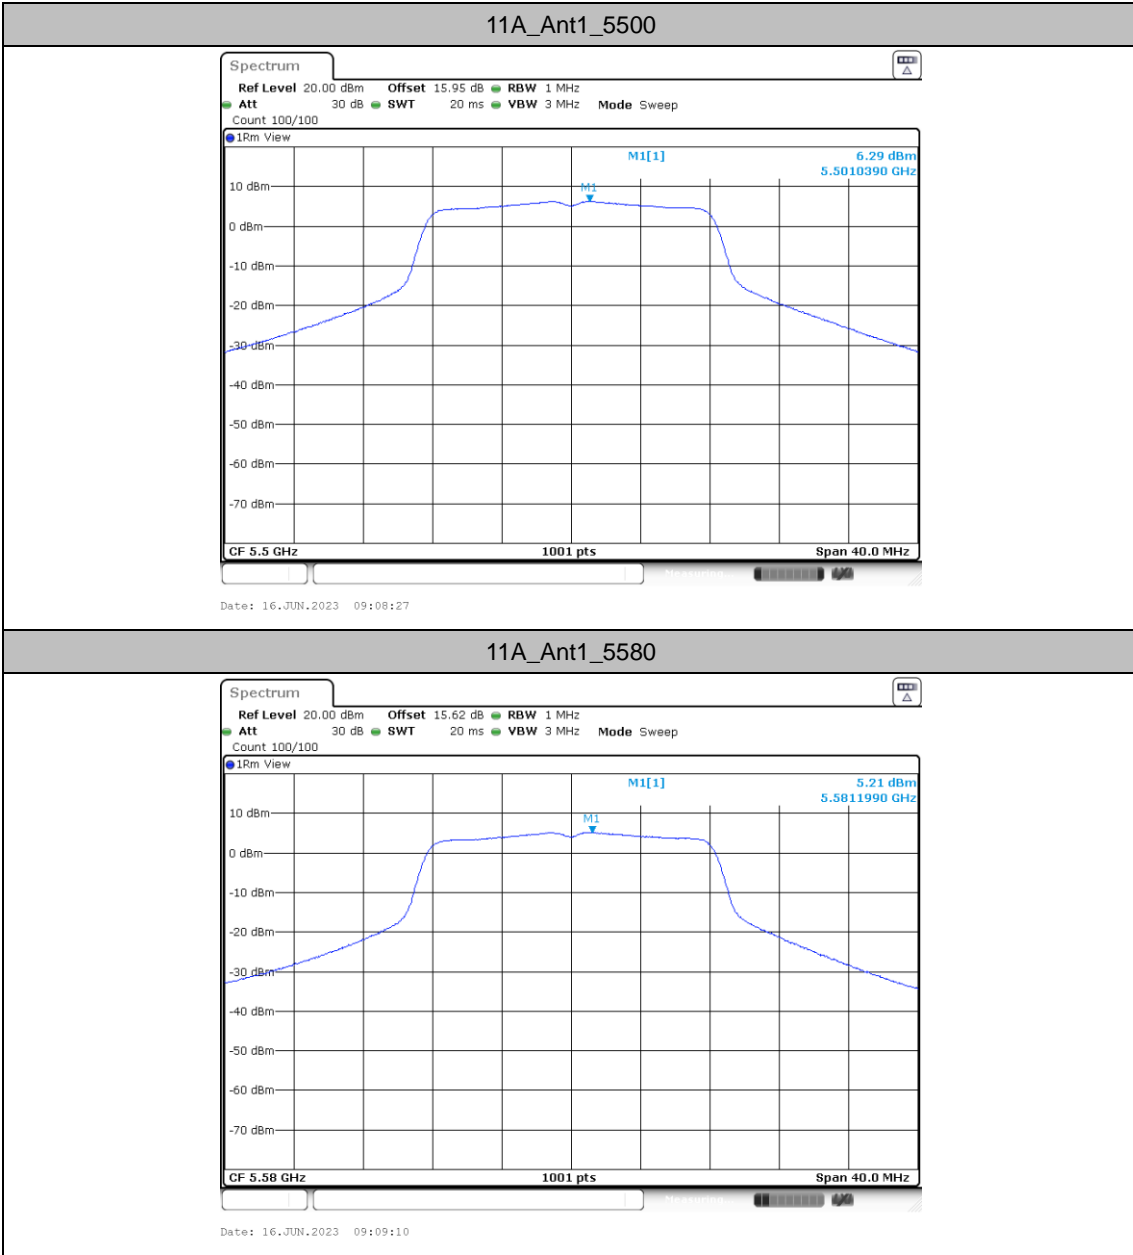


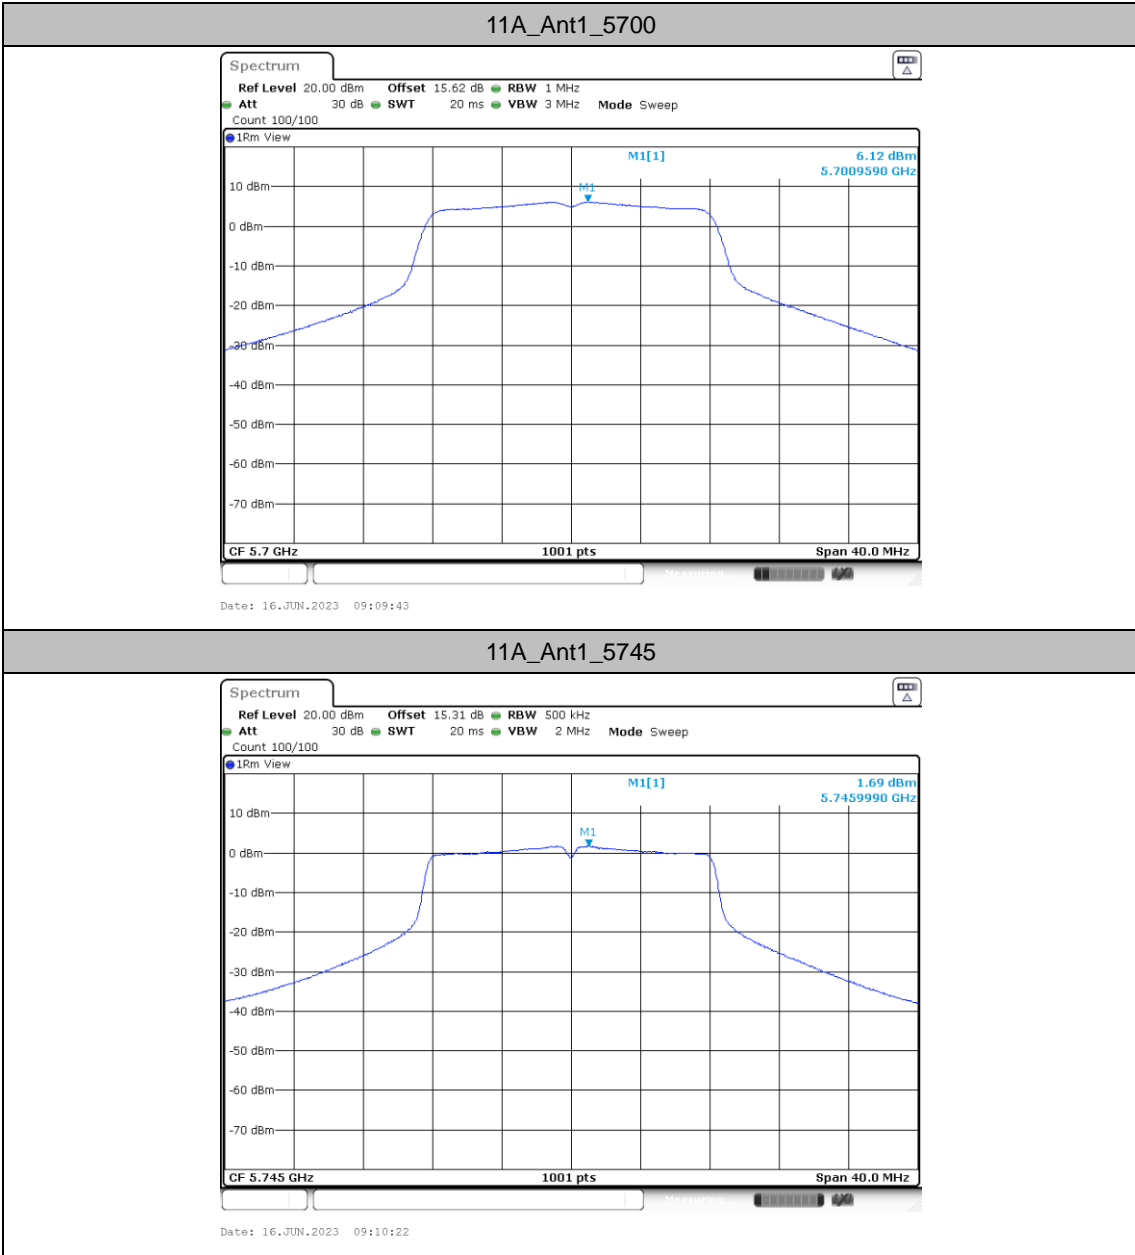


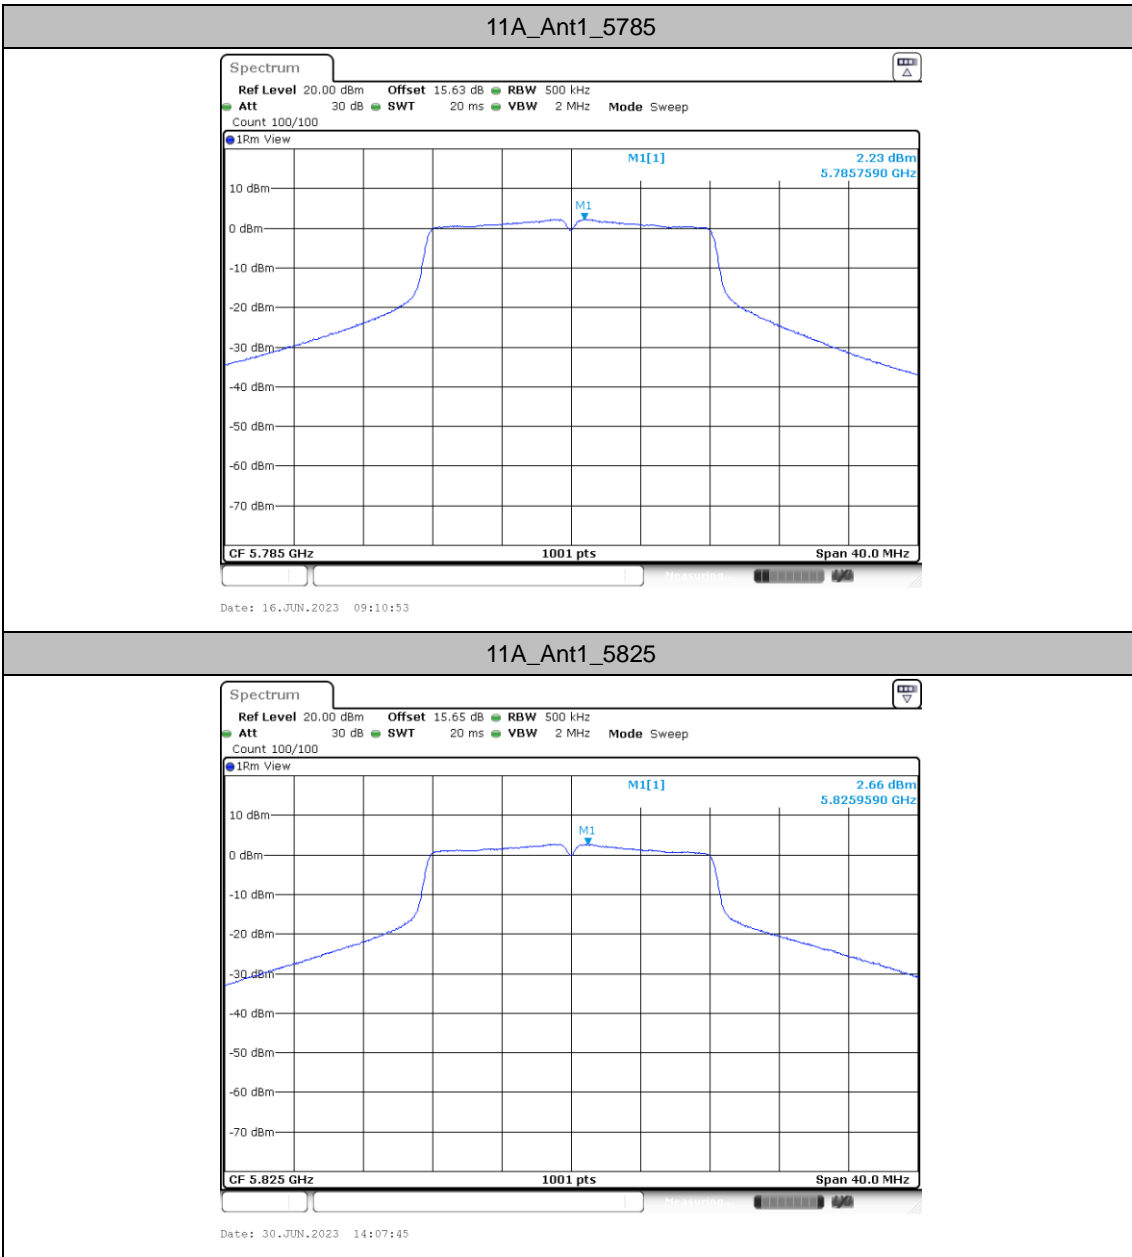


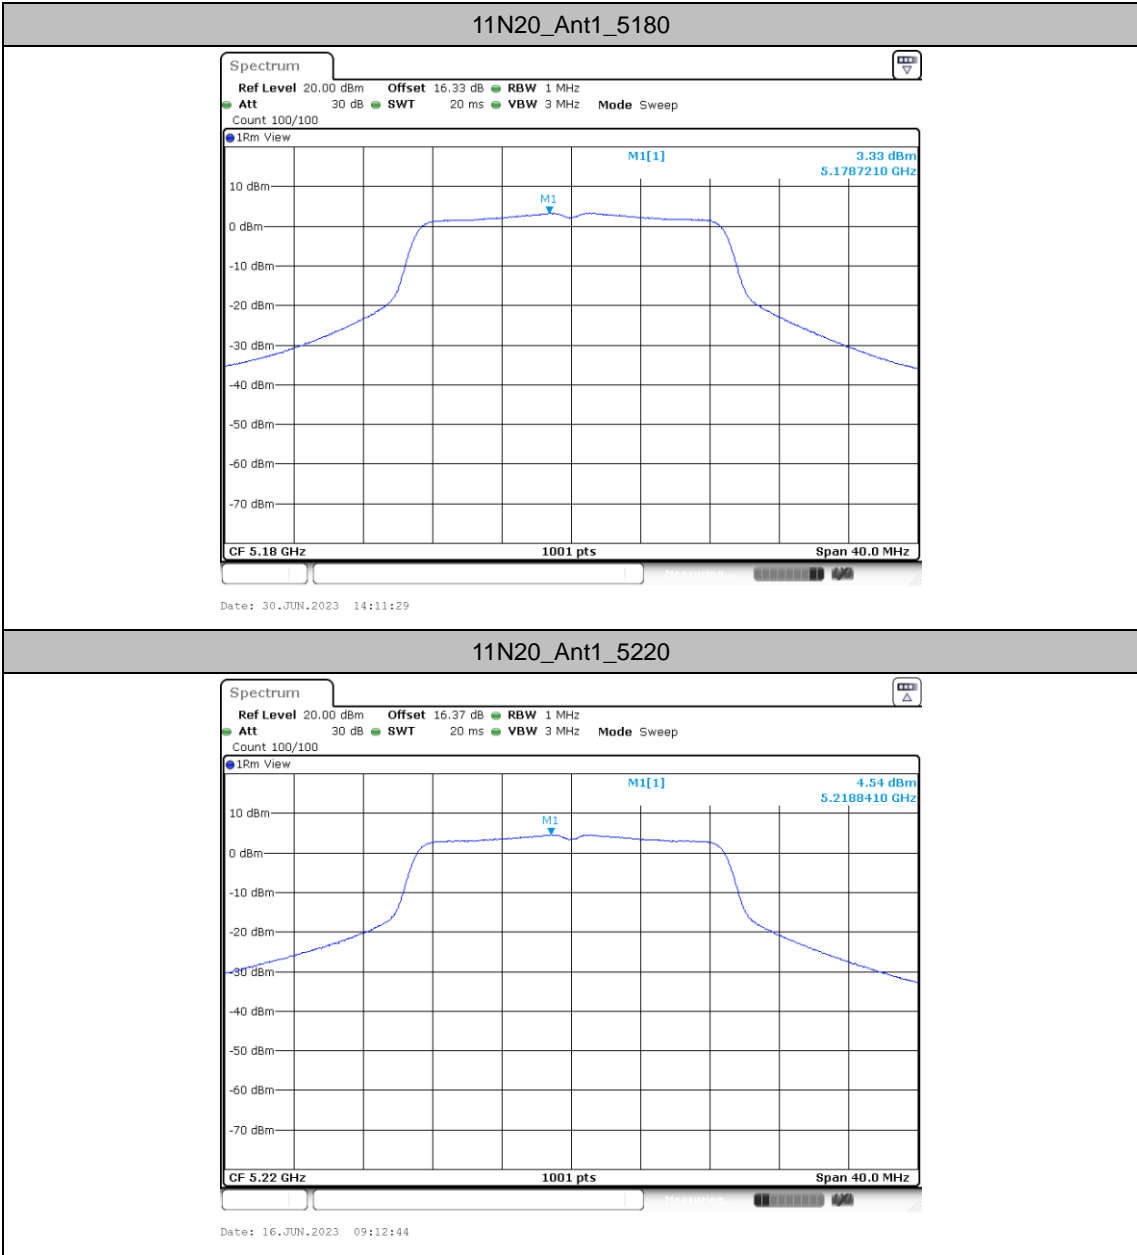


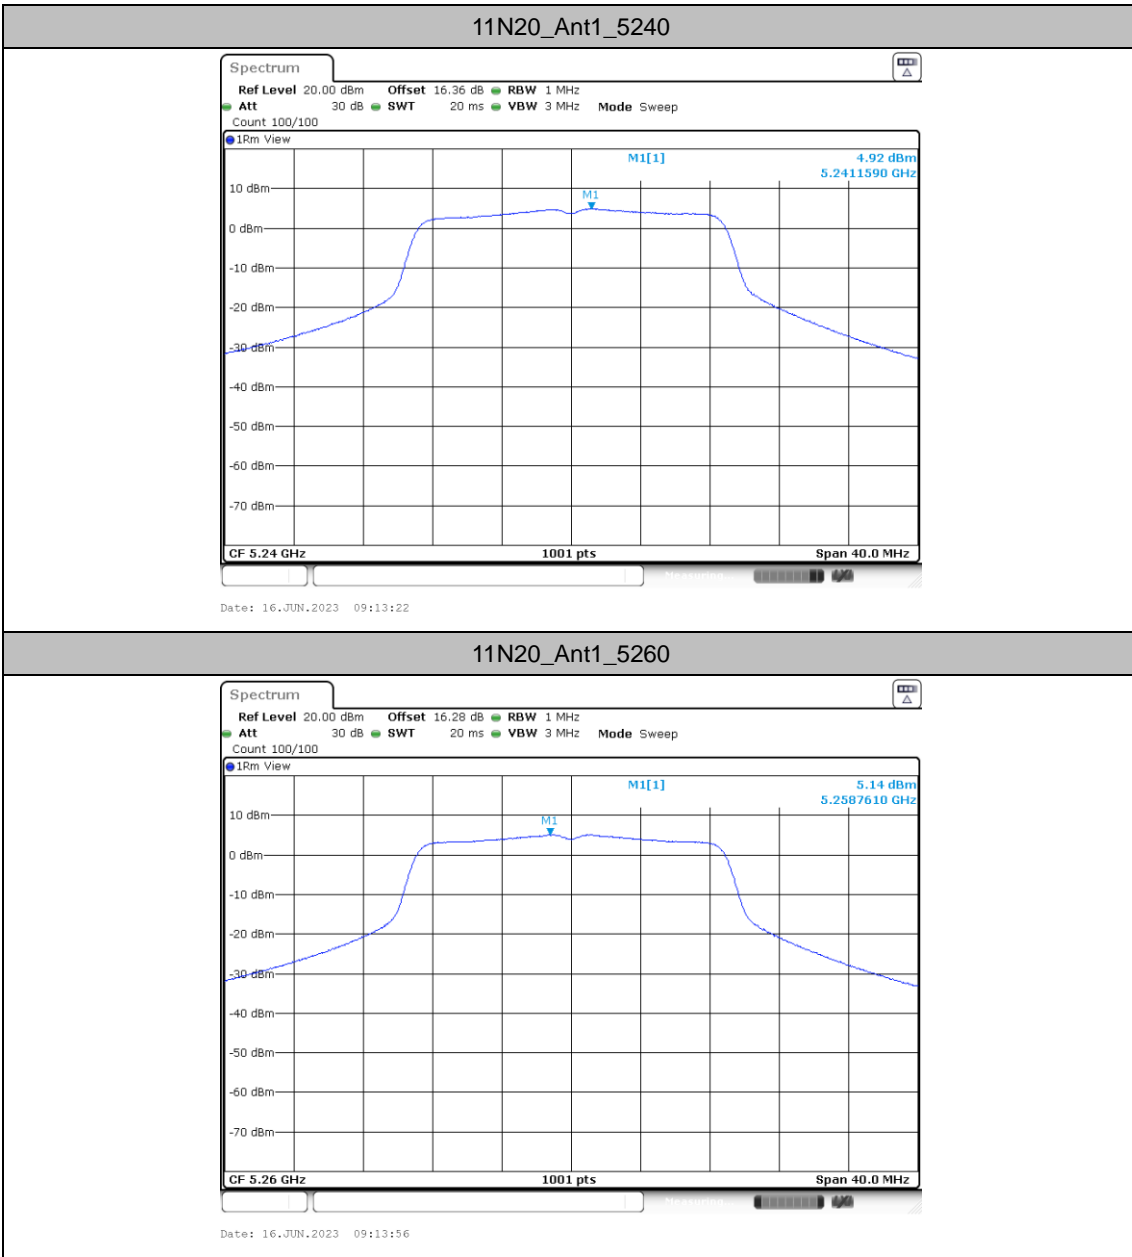


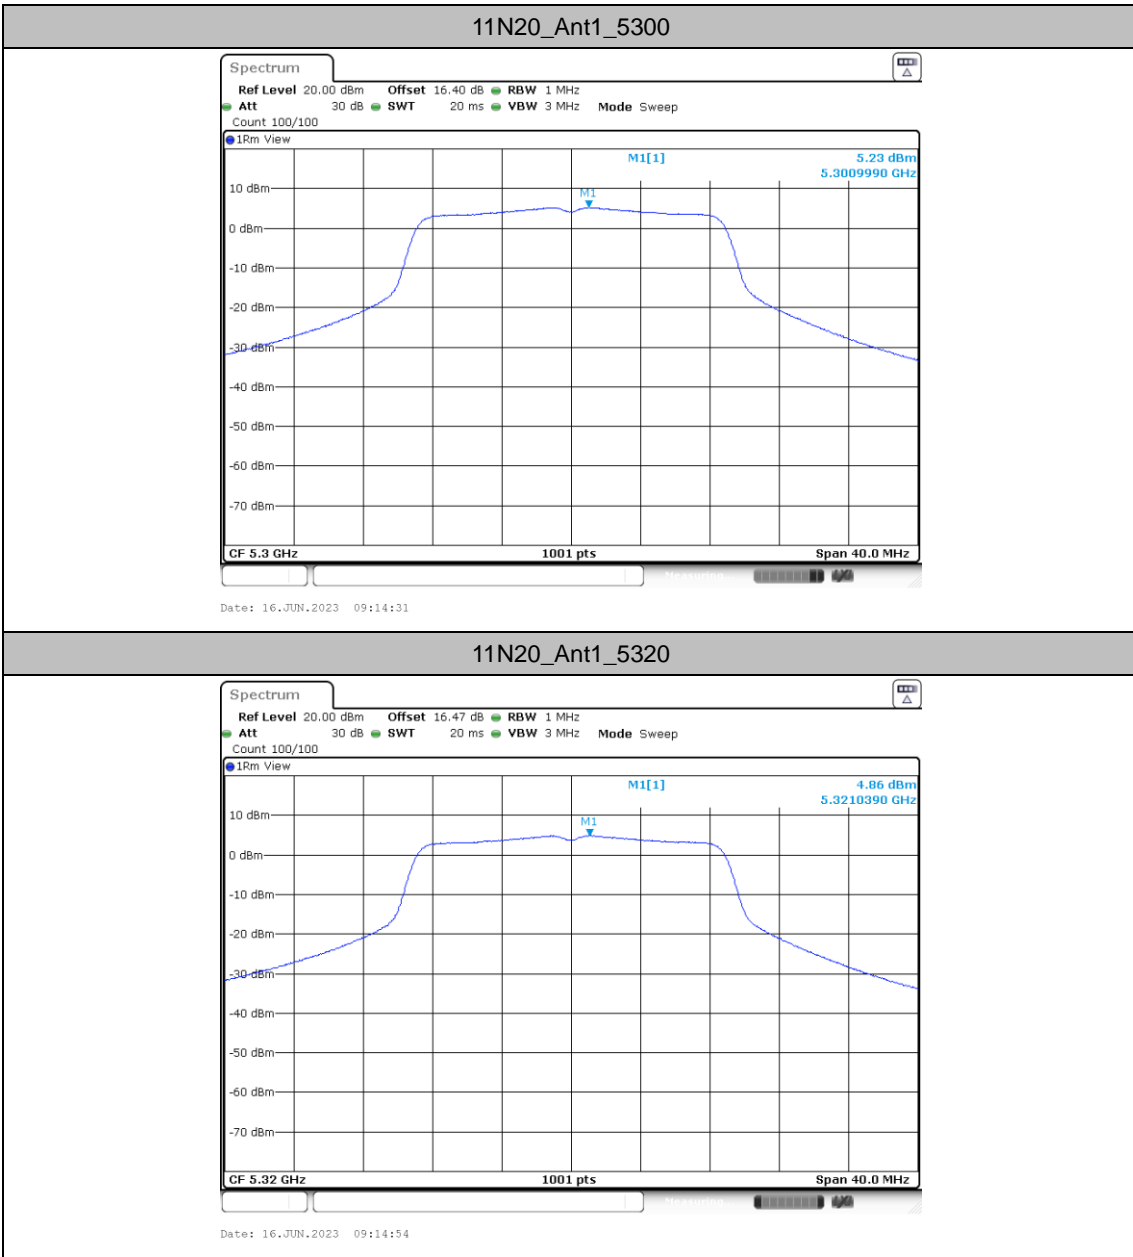


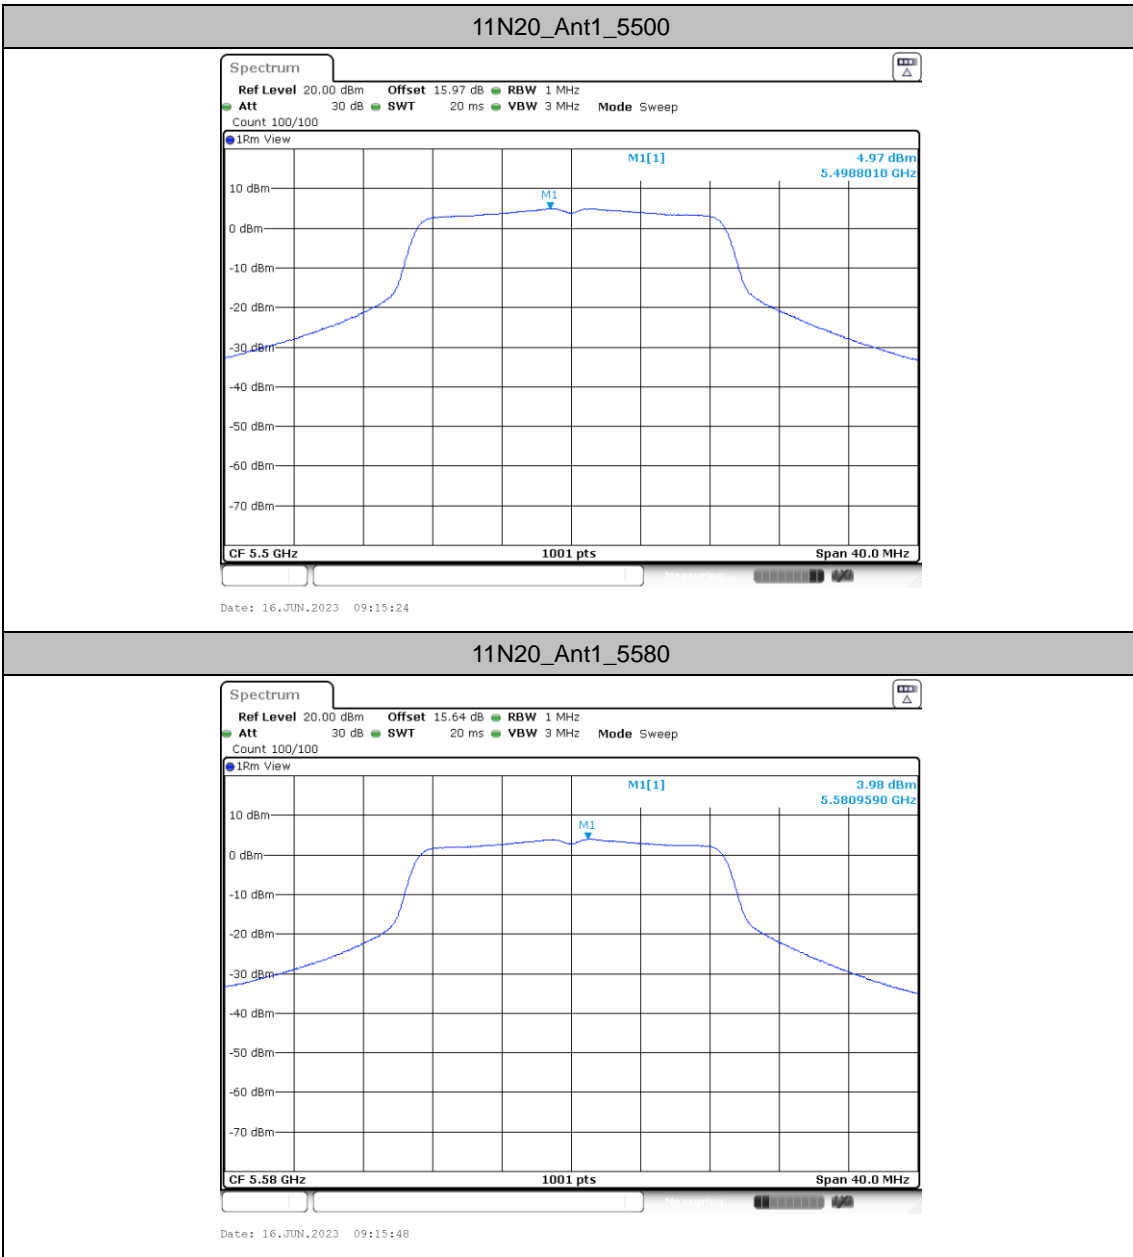


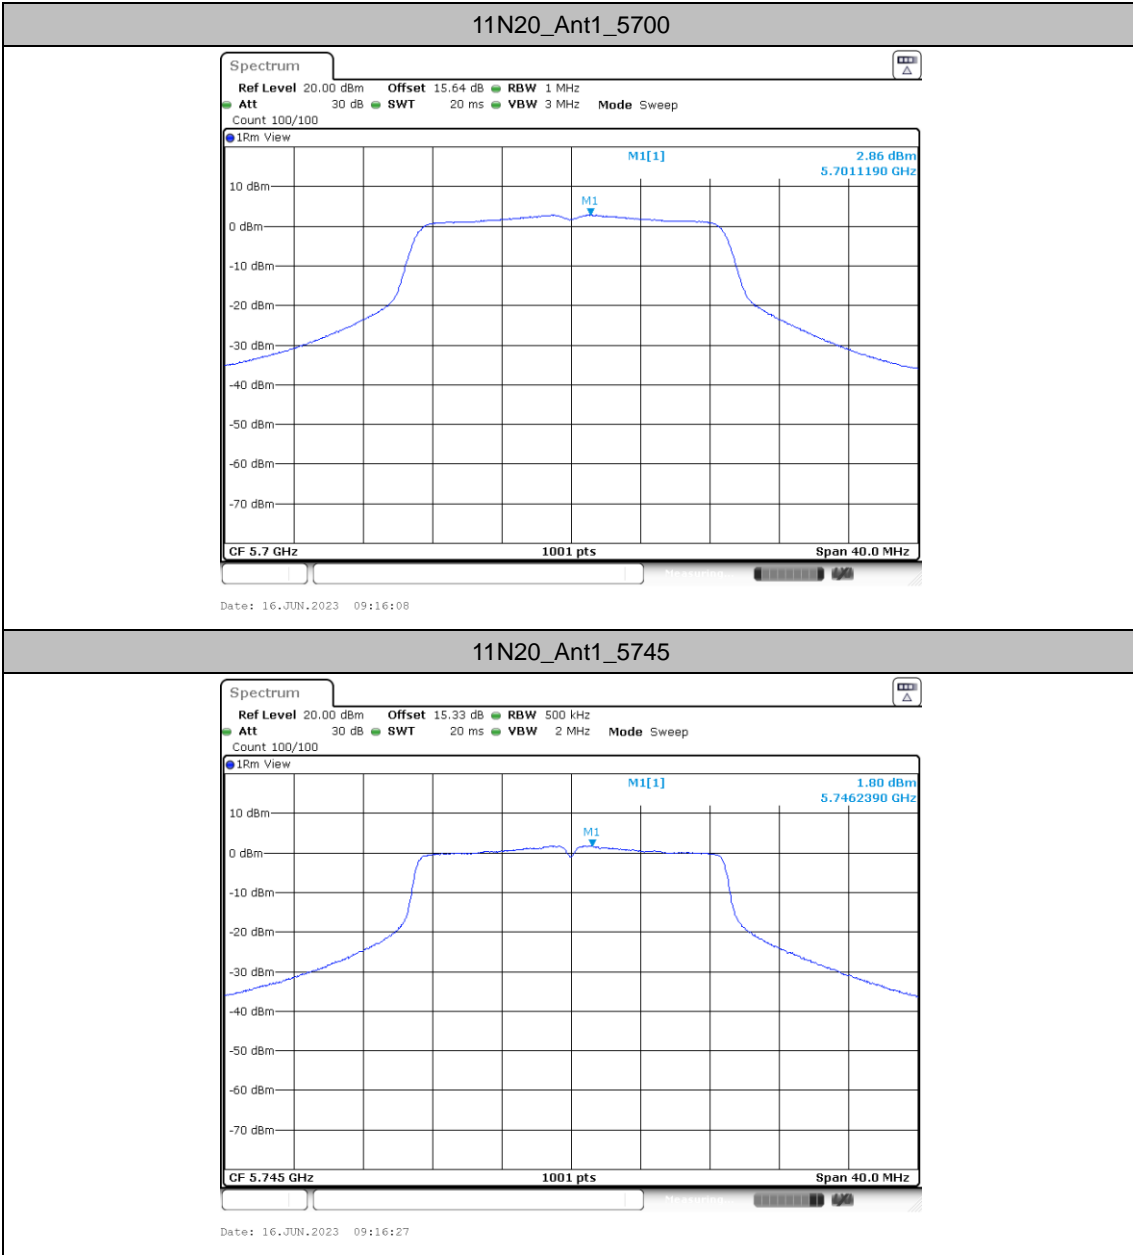


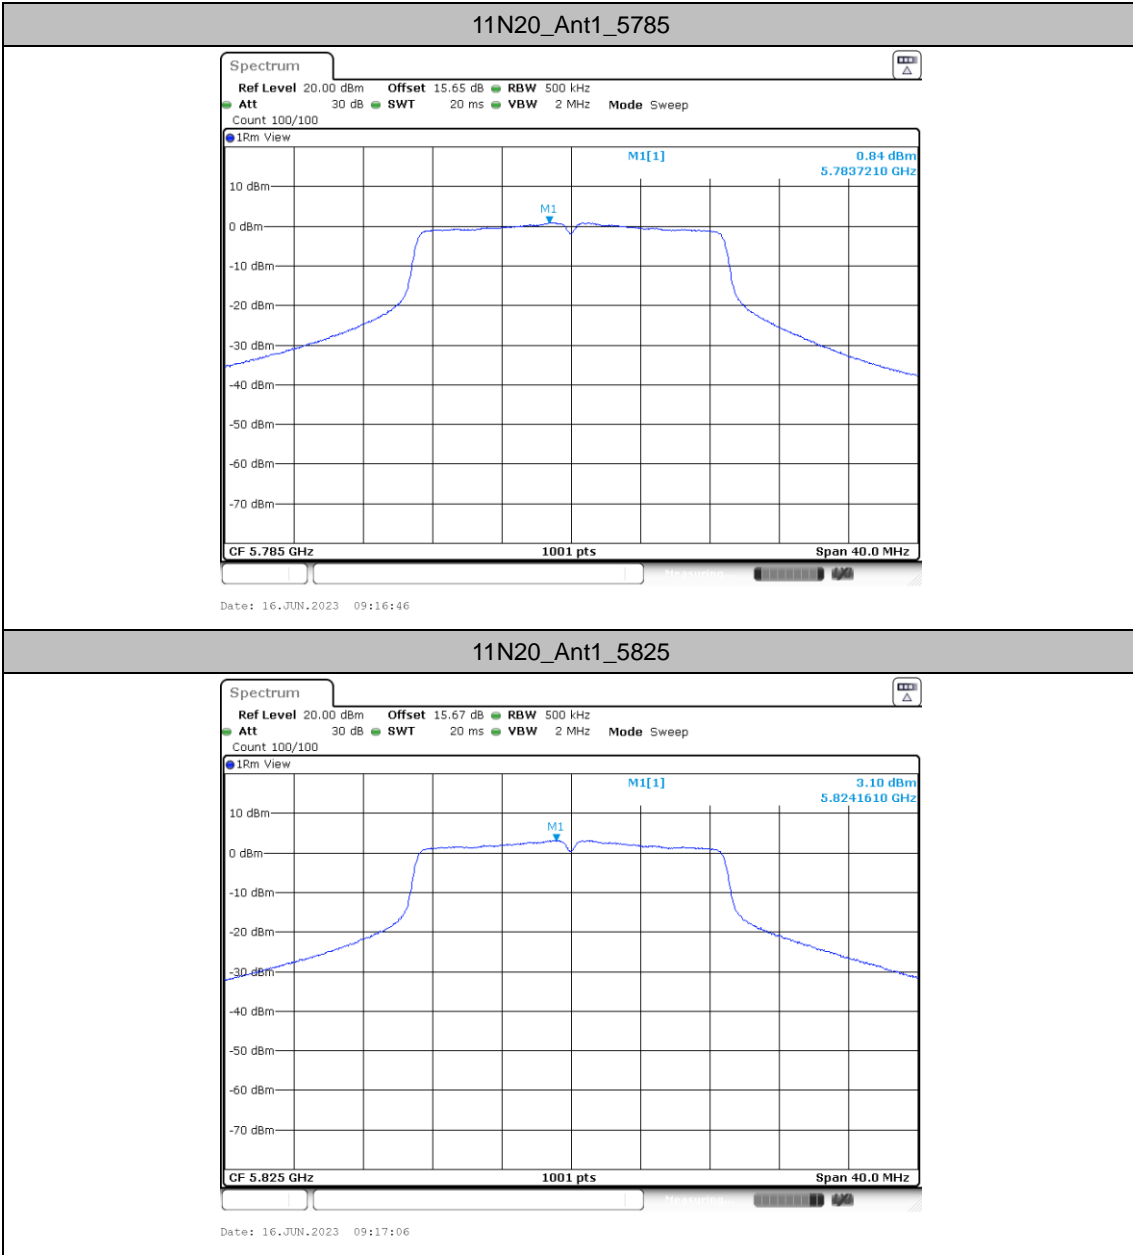


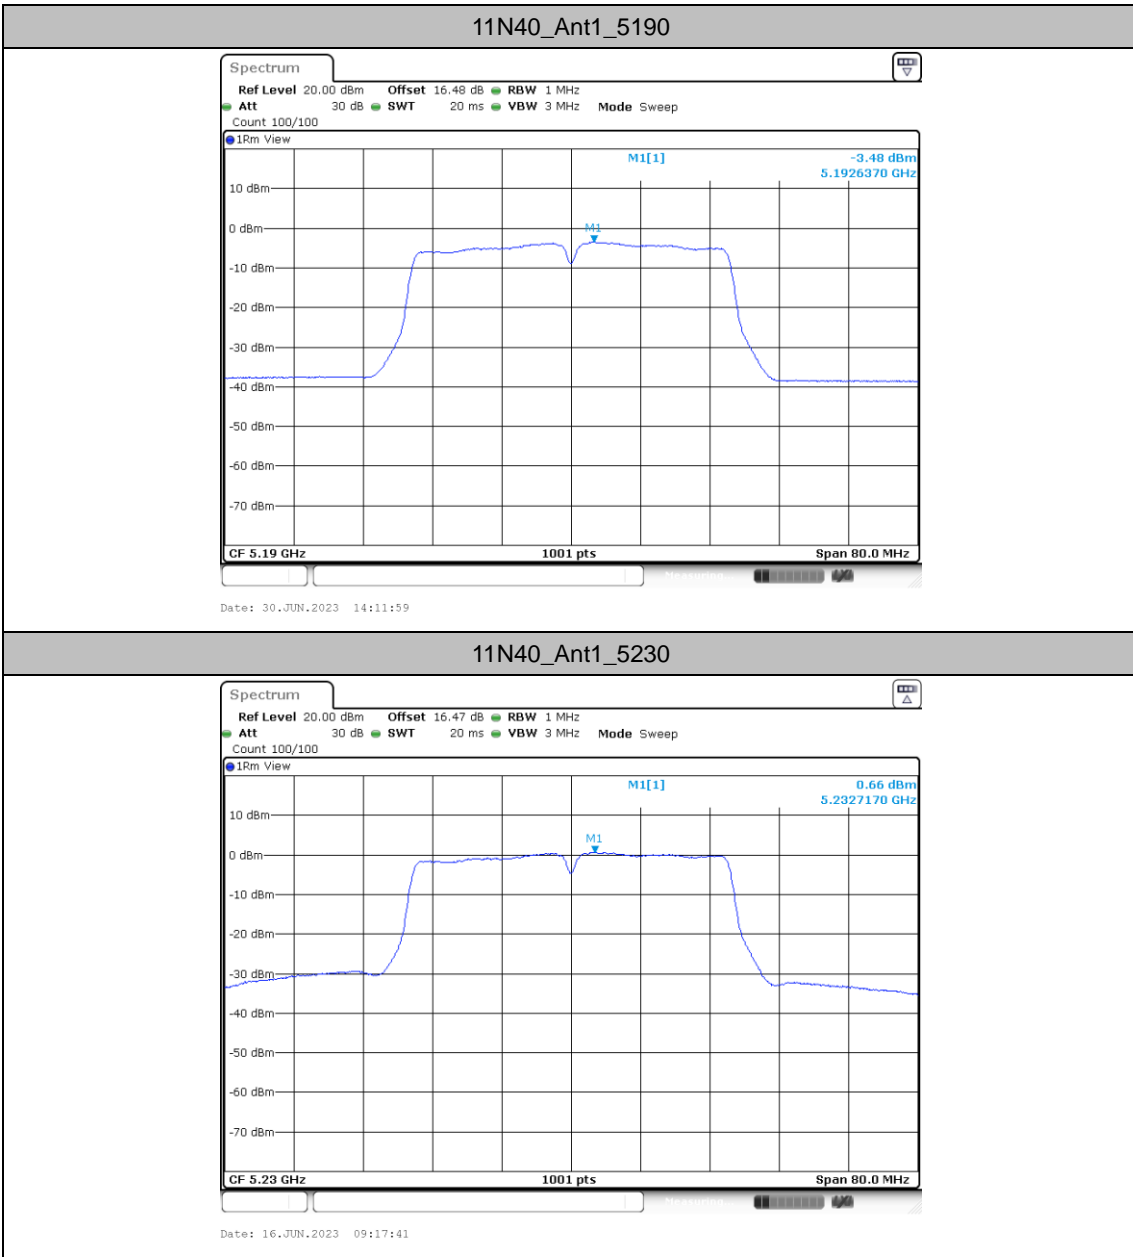


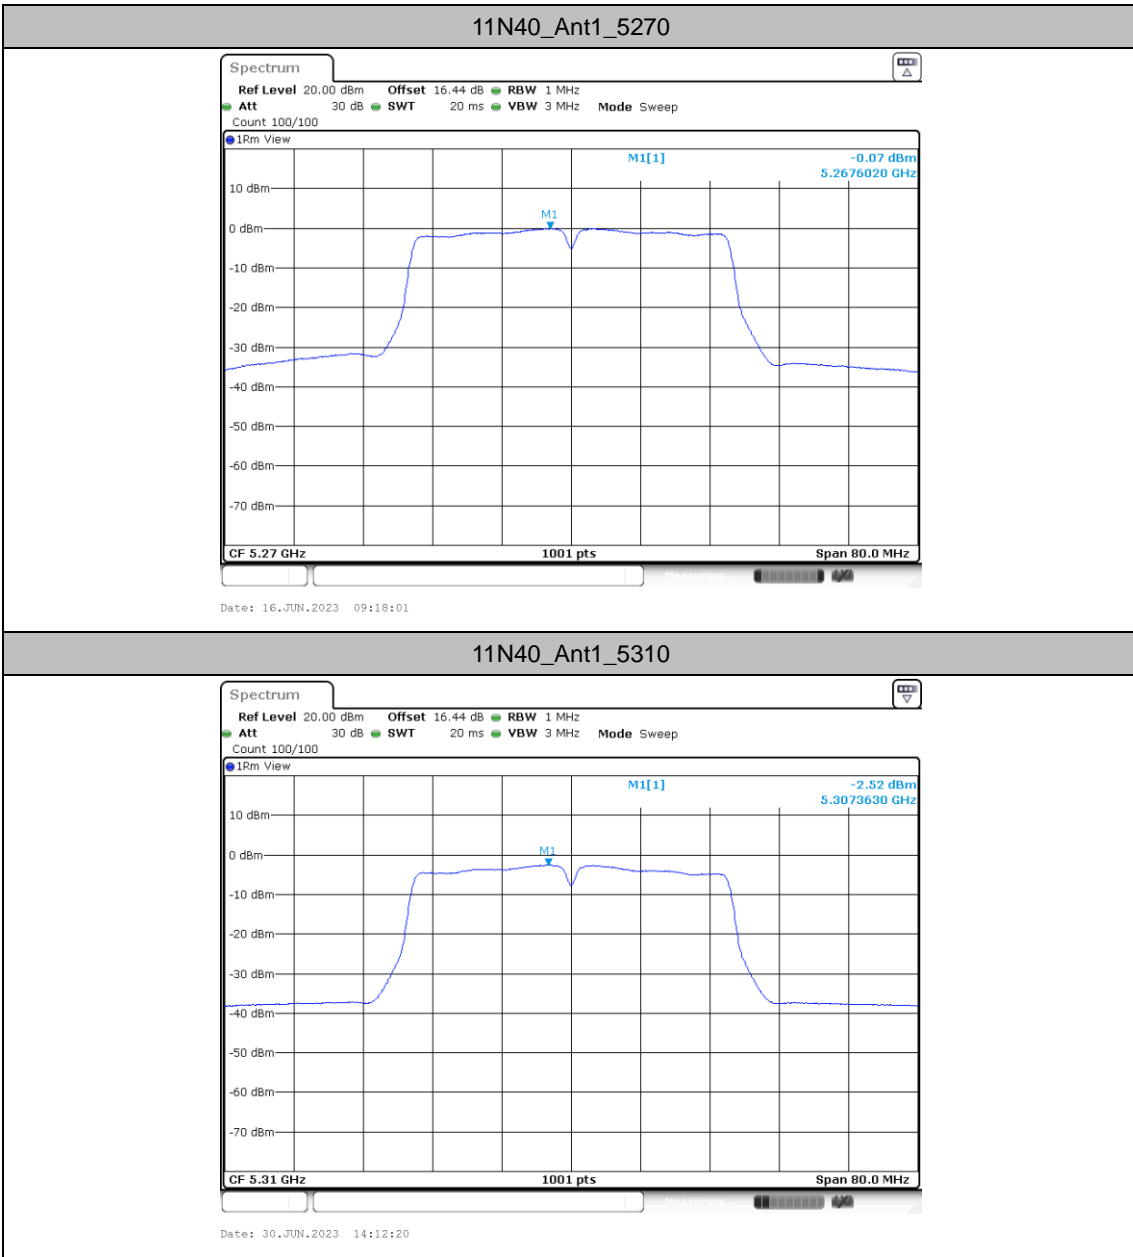


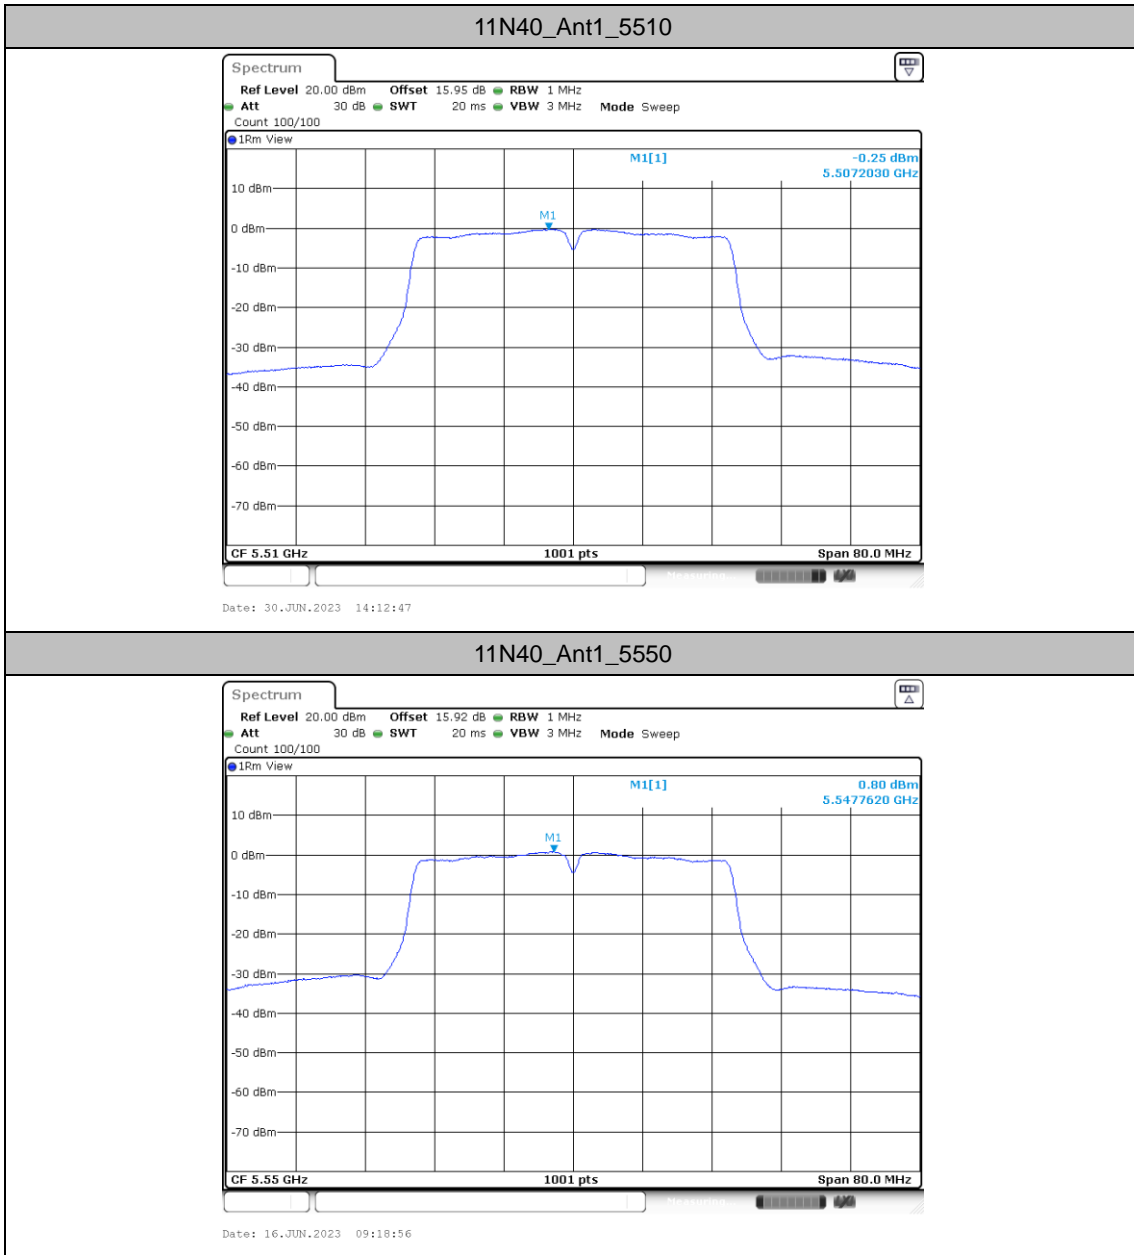


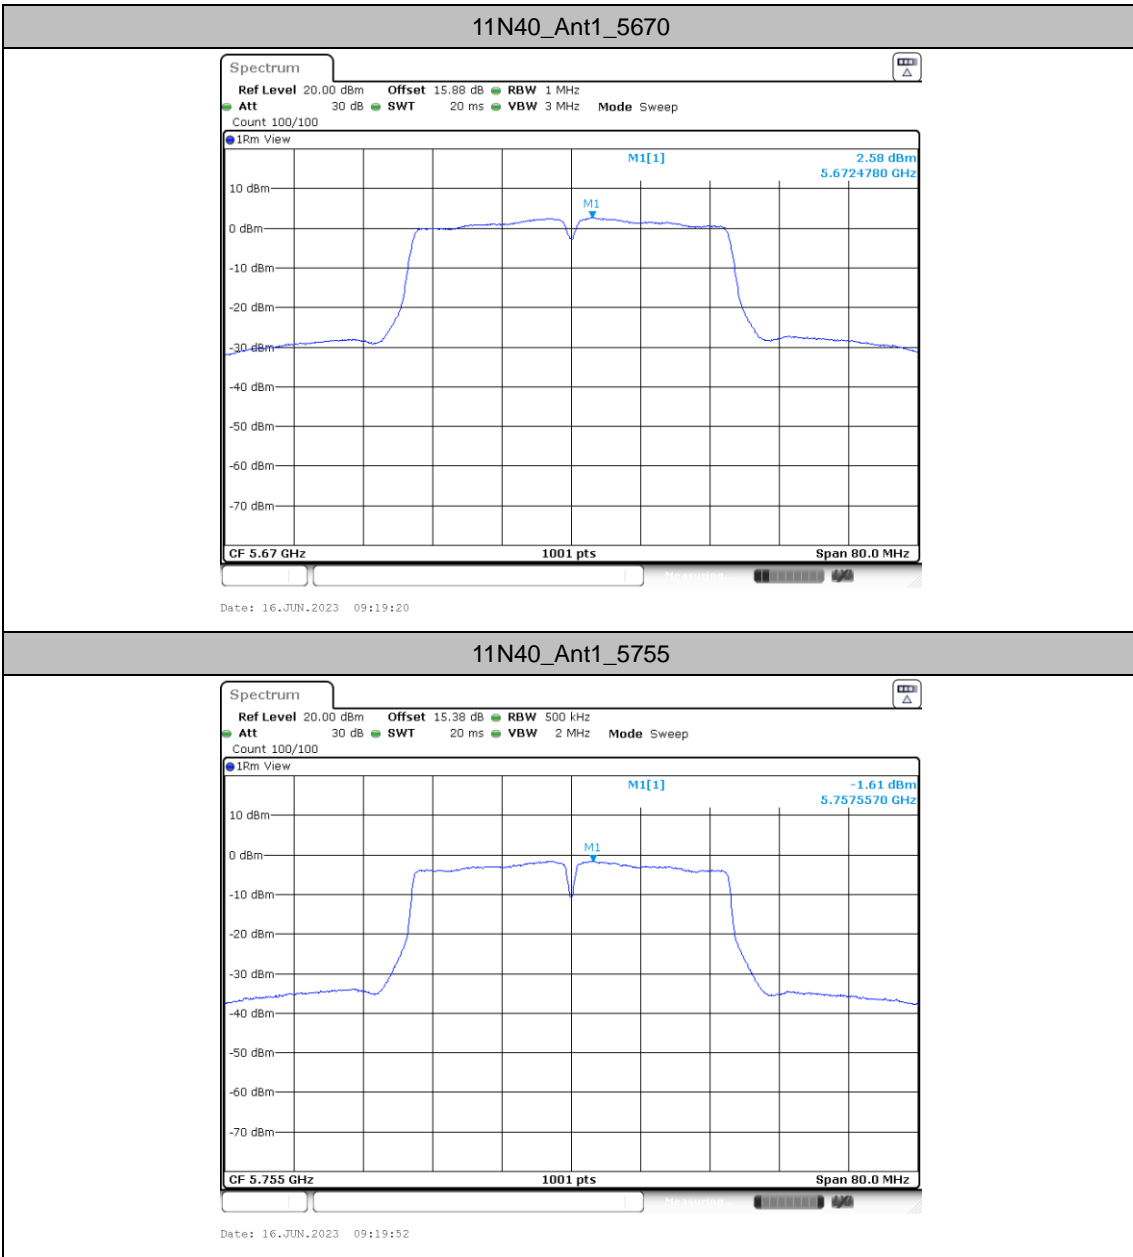

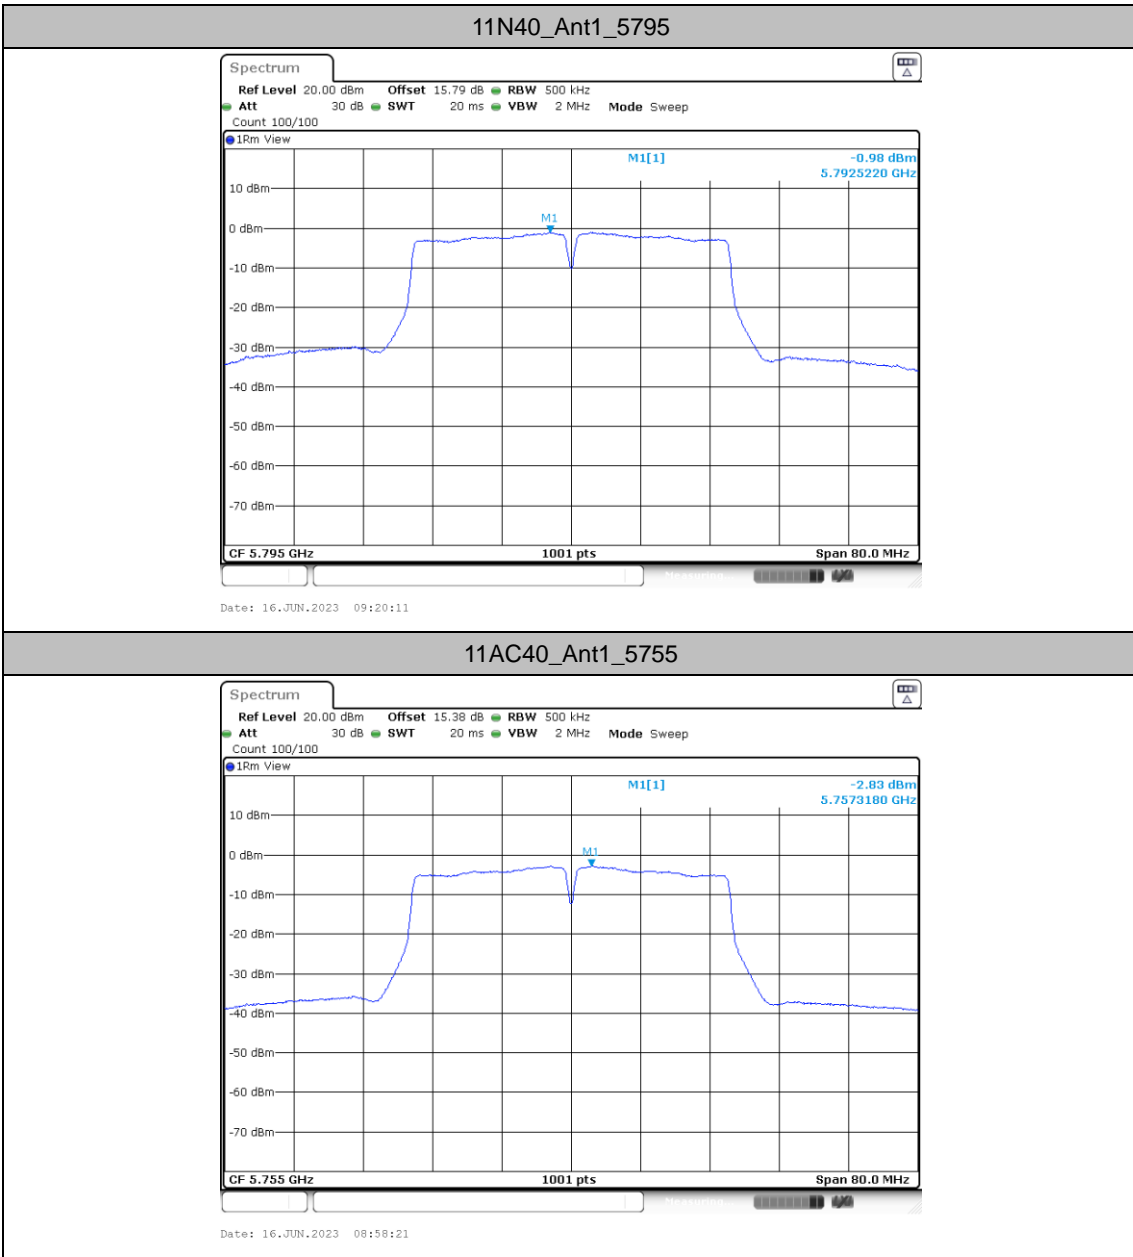

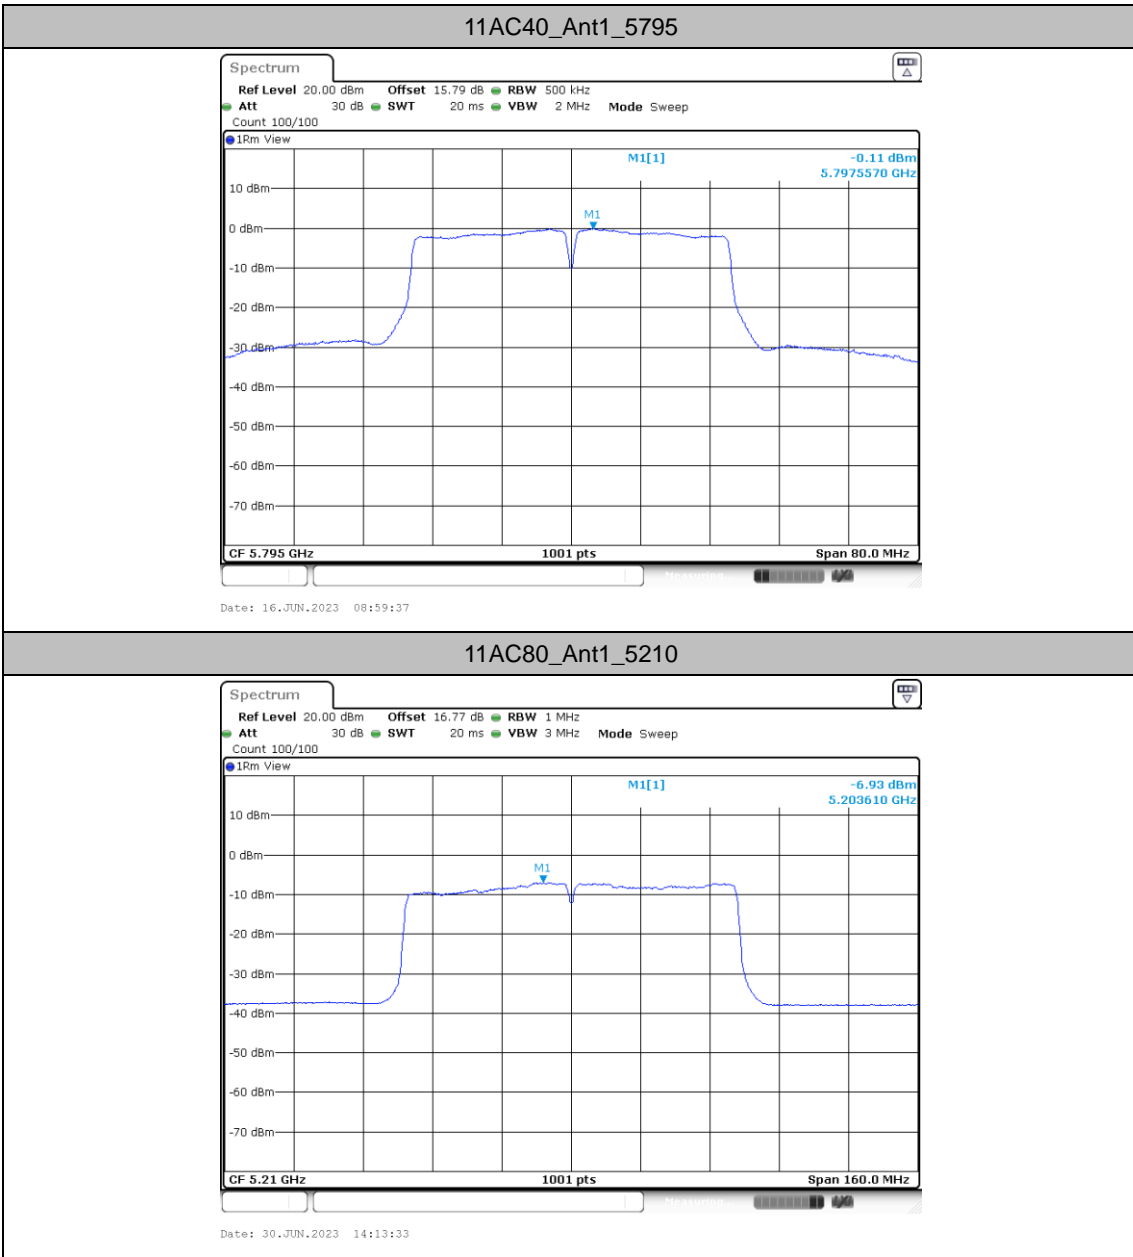

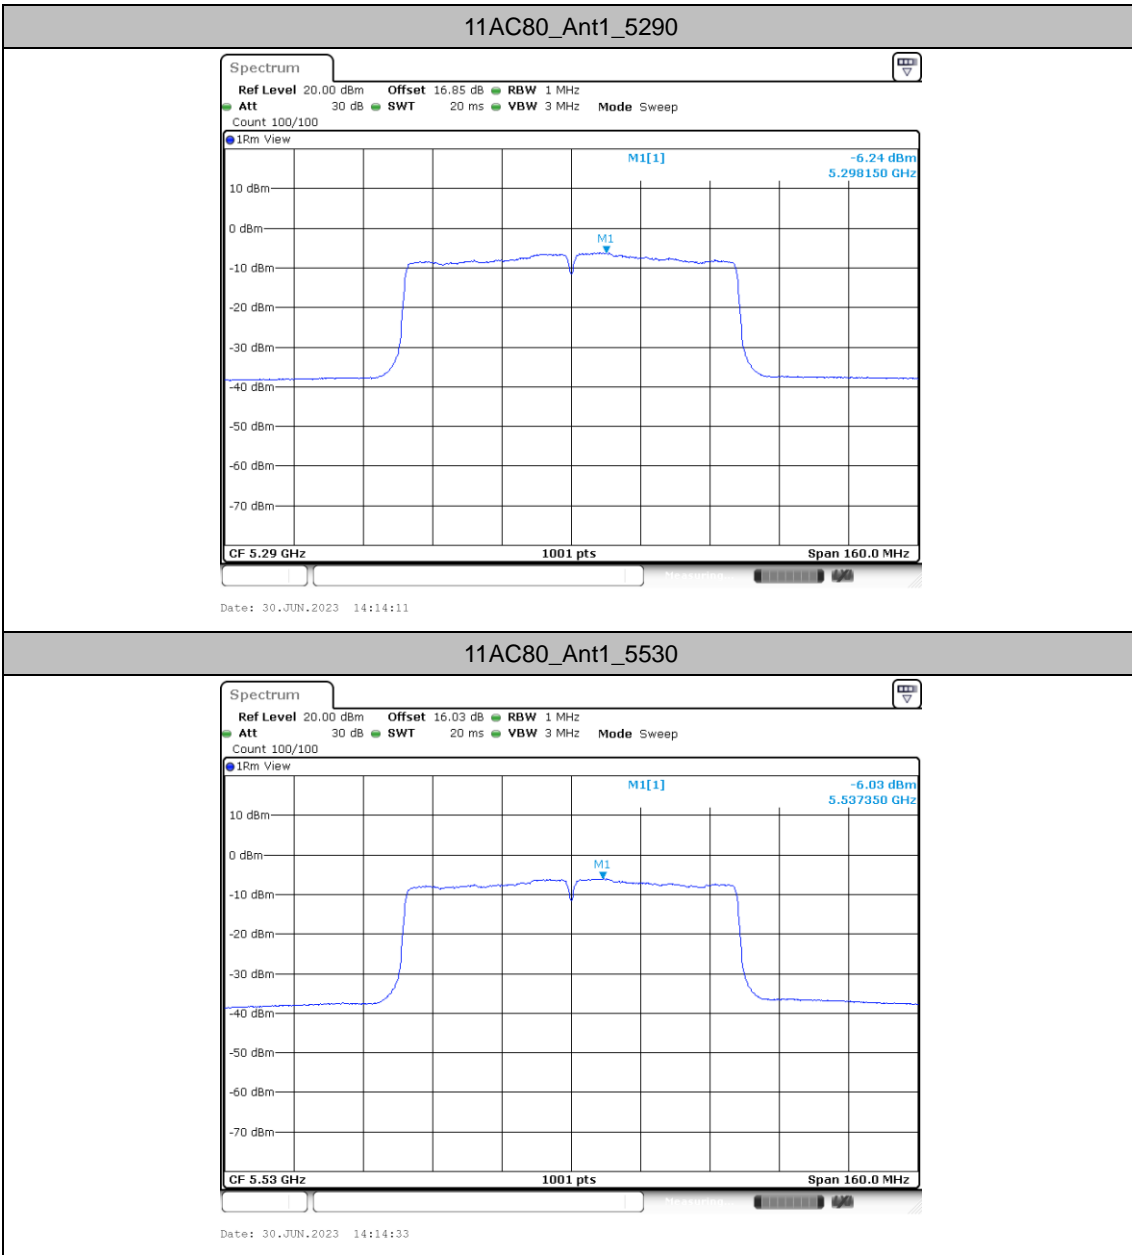


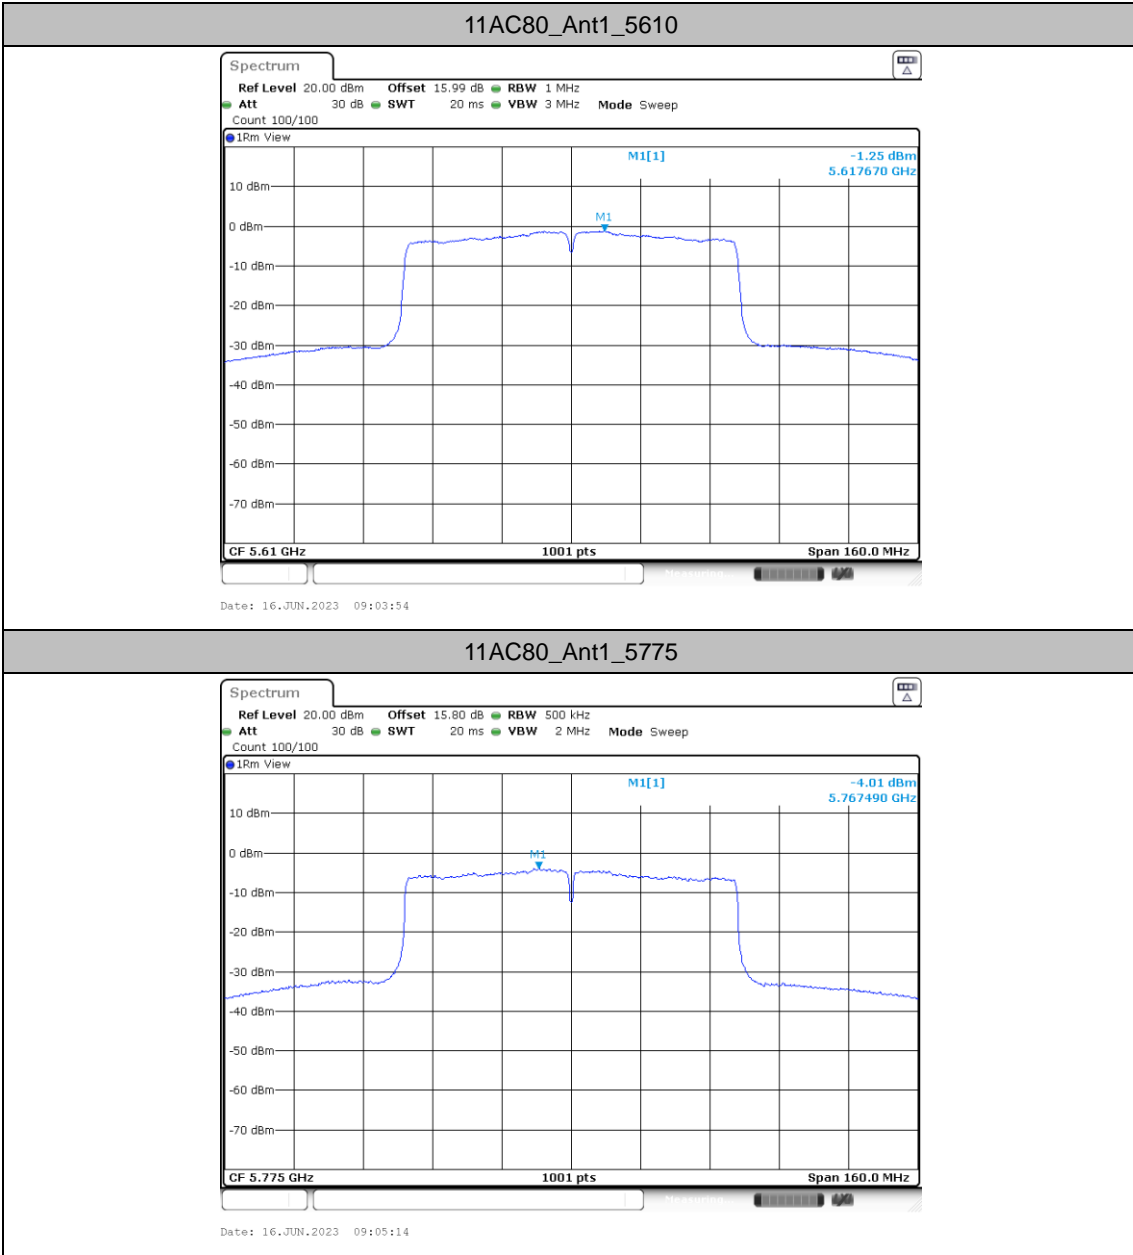



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

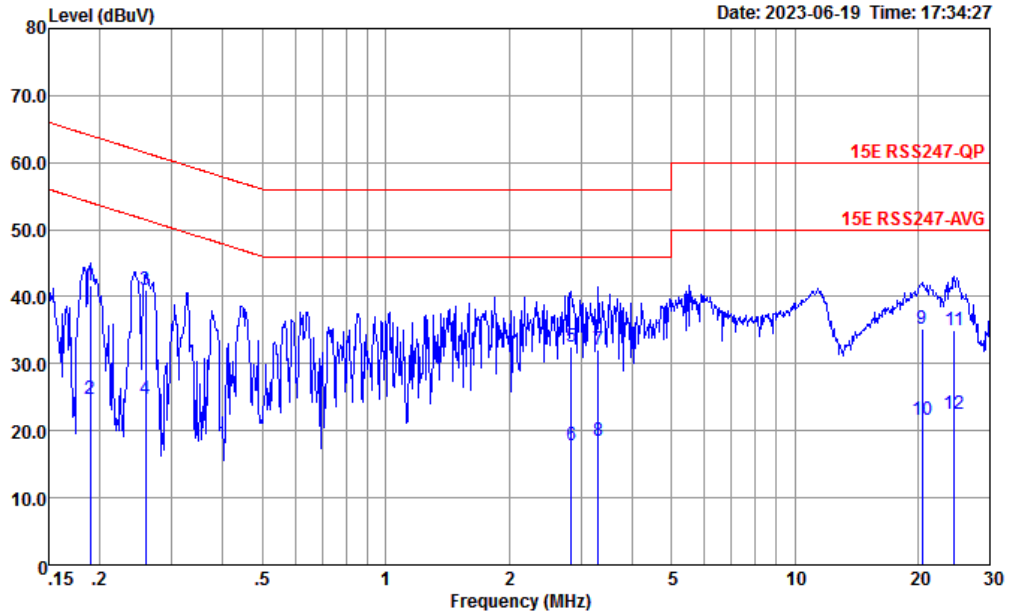


Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.189	41.65	-22.41	64.06	31.20	0.03	10.42	QP
2	0.189	24.65	-29.41	54.06	14.20	0.03	10.42	Average
3 *	0.259	40.92	-20.55	61.47	30.49	0.05	10.38	QP
4	0.259	24.72	-26.75	51.47	14.29	0.05	10.38	Average
5	2.839	32.56	-23.44	56.00	22.60	-0.10	10.06	QP
6	2.839	17.76	-28.24	46.00	7.80	-0.10	10.06	Average
7	3.310	32.15	-23.85	56.00	22.20	-0.11	10.06	QP
8	3.310	18.55	-27.45	46.00	8.60	-0.11	10.06	Average
9	20.486	35.23	-24.77	60.00	24.20	-0.32	11.35	QP
10	20.486	21.53	-28.47	50.00	10.50	-0.32	11.35	Average
11	24.529	34.96	-25.04	60.00	23.81	-0.34	11.49	QP
12	24.529	22.46	-27.54	50.00	11.31	-0.34	11.49	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

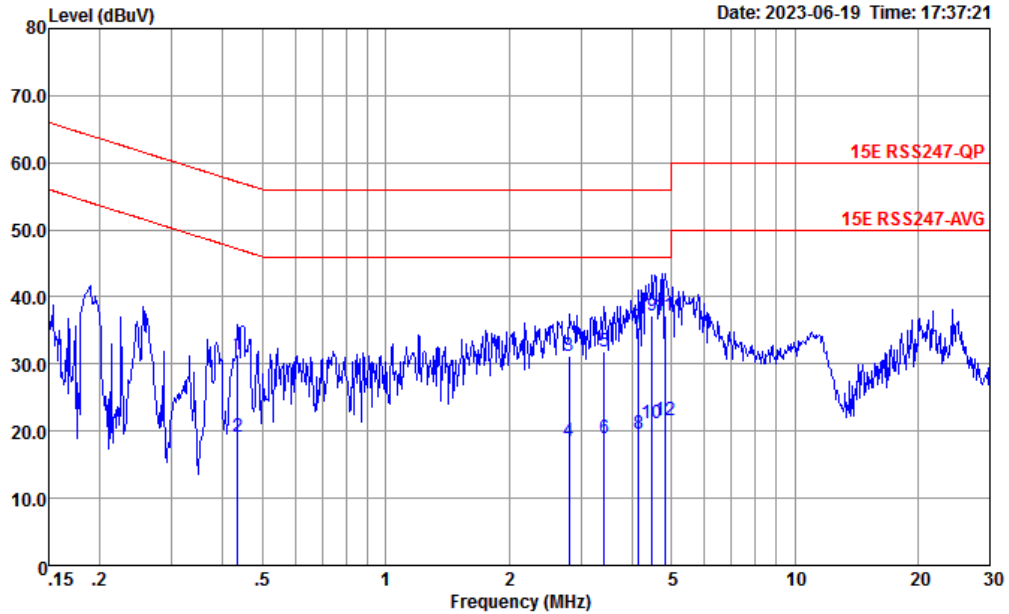

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.435	31.39	-25.76	57.15	21.19	-0.07	10.27	QP
2	0.435	19.09	-28.06	47.15	8.89	-0.07	10.27	Average
3	2.809	31.13	-24.87	56.00	21.20	-0.13	10.06	QP
4	2.809	18.53	-27.47	46.00	8.60	-0.13	10.06	Average
5	3.417	31.83	-24.17	56.00	21.89	-0.12	10.06	QP
6	3.417	18.83	-27.17	46.00	8.89	-0.12	10.06	Average
7	4.158	35.54	-20.46	56.00	25.60	-0.12	10.06	QP
8	4.158	19.54	-26.46	46.00	9.60	-0.12	10.06	Average
9	4.478	37.14	-18.86	56.00	27.19	-0.11	10.06	QP
10	4.478	21.14	-24.86	46.00	11.19	-0.11	10.06	Average
11 *	4.822	37.15	-18.85	56.00	27.20	-0.11	10.06	QP
12	4.822	21.55	-24.45	46.00	11.60	-0.11	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	1	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	1	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	1	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11n HT20	52	5280	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	1	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	1	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	1	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	1	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	1	802.11n HT40	46	5230	MCS0	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 21	U-NII-2A	5.25-5.35	1	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	1	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	1	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	1	802.11n HT40	110	5550	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	1	802.11n HT40	134	5670	MCS0	-	-
Mode 26	U-NII-1	5.15-5.25	1	802.11ac VHT80	42	5210	MCS0	-	-
Mode 27	U-NII-2A	5.25-5.35	1	802.11ac VHT80	58	5290	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	1	802.11ac VHT80	106	5530	MCS0	-	-
Mode 29	U-NII-2C	5.47-5.725	1	802.11ac VHT80	122	5610	MCS0	-	-
Mode 30	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	1	802.11n HT20	149	5745	MCS0	-	-
Mode 34	U-NII-3	5.725-5.85	1	802.11n HT20	157	5785	MCS0	-	-
Mode 35	U-NII-3	5.725-5.85	1	802.11n HT20	165	5825	MCS0	-	-
Mode 36	U-NII-3	5.725-5.85	1	802.11n HT40	151	5755	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	1	802.11n HT40	159	5795	MCS0	-	-
Mode 38	U-NII-3	5.725-5.85	1	802.11ac VHT40	159	5795	MCS0	-	-
Mode 39	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.92	47.66	54.00	-6.34	H	AVERAGE	Pass	Band Edge
	802.11a	36	10360.00	45.91	68.20	-22.29	V	PEAK	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
	802.11a	44	10440.00	47.49	68.20	-20.71	V	PEAK	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
	802.11a	48	10480.00	48.35	68.20	-19.85	V	PEAK	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
	802.11a	52	10520.00	46.66	68.20	-21.54	V	PEAK	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
	802.11a	60	10600.01	46.58	74.00	-27.42	V	PEAK	Pass	Harmonic
6	802.11a	64	5350.10	46.11	54.00	-7.89	V	AVERAGE	Pass	Band Edge
	802.11a	64	10640.00	47.00	74.00	-27.00	H	PEAK	Pass	Harmonic
7	802.11a	100	5459.95	43.63	54.00	-10.37	V	AVERAGE	Pass	Band Edge
	802.11a	100	11000.00	46.96	74.00	-27.04	H	PEAK	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
	802.11a	116	11160.00	36.11	54.00	-17.89	V	AVERAGE	Pass	Harmonic
9	802.11a	140	5725.81	60.75	68.20	-7.45	V	PEAK	Pass	Band Edge
	802.11a	140	11400.00	36.51	54.00	-17.49	V	AVERAGE	Pass	Harmonic
10	802.11n HT20	36	5149.92	48.54	54.00	-5.46	V	AVERAGE	Pass	Band Edge
	802.11n HT20	36	10360.00	46.31	68.20	-21.89	V	PEAK	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	44	10440.00	47.96	68.20	-20.24	H	PEAK	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	48	10480.00	46.17	68.20	-22.03	V	PEAK	Pass	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	52	10560.00	46.04	68.20	-22.16	H	PEAK	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	60	10600.01	46.06	74.00	-27.94	H	PEAK	Pass	Harmonic
15	802.11n HT20	64	5350.10	46.46	54.00	-7.54	V	AVERAGE	Pass	Band Edge
	802.11n HT20	64	10640.00	45.13	74.00	-28.87	V	PEAK	Pass	Harmonic
16	802.11n HT20	100	5458.15	43.98	54.00	-10.02	V	AVERAGE	Pass	Band Edge
	802.11n HT20	100	11000.00	45.66	74.00	-28.34	H	PEAK	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	116	11160.00	45.59	74.00	-28.41	V	PEAK	Pass	Harmonic
18	802.11n HT20	140	5726.00	59.05	68.20	-9.15	H	PEAK	Pass	Band Edge
	802.11n HT20	140	11400.00	45.97	74.00	-28.03	H	PEAK	Pass	Harmonic
19	802.11n HT40	38	5150.00	48.94	54.00	-5.06	V	AVERAGE	Pass	Band Edge
	802.11n HT40	38	10380.00	43.93	68.20	-24.27	V	PEAK	Pass	Harmonic
20	802.11n HT40	46	-	-	-	-	-	-	-	Band Edge
	802.11n HT40	46	10460.00	44.37	68.20	-23.83	H	PEAK	Pass	Harmonic
21	802.11n HT40	54	-	-	-	-	-	-	-	Band Edge
	802.11n HT40	54	10540.00	44.24	68.20	-23.96	V	PEAK	Pass	Harmonic
22	802.11n HT40	62	5350.20	48.97	54.00	-5.03	H	AVERAGE	Pass	Band Edge
	802.11n HT40	62	10620.00	43.87	74.00	-30.13	V	PEAK	Pass	Harmonic
23	802.11n HT40	102	5470.00	63.16	68.20	-5.04	H	PEAK	Pass	Band Edge
	802.11n HT40	102	11020.00	43.34	74.00	-30.66	V	PEAK	Pass	Harmonic
24	802.11n HT40	110	-	-	-	-	-	-	-	Band Edge
	802.11n HT40	110	11100.00	43.93	74.00	-30.07	H	PEAK	Pass	Harmonic
25	802.11n HT40	134	5457.84	43.09	54.00	-10.91	H	AVERAGE	Pass	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
	802.11n HT40	134	11340.00	44.11	74.00	-29.89	V	PEAK	Pass	Harmonic
26	802.11ac VHT80	42	5148.26	48.02	54.00	-5.98	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	42	10420.00	44.44	68.20	-23.76	V	PEAK	Pass	Harmonic
27	802.11ac VHT80	58	5351.71	48.60	54.00	-5.40	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	58	10580.00	44.30	68.20	-23.90	H	PEAK	Pass	Harmonic
28	802.11ac VHT80	106	5459.08	48.72	54.00	-5.28	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	106	11060.00	43.75	74.00	-30.25	H	PEAK	Pass	Harmonic
29	802.11ac VHT80	122	5459.62	43.65	54.00	-10.35	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	122	11220.00	43.63	74.00	-30.37	H	PEAK	Pass	Harmonic
30	802.11a	149	5600.29	54.05	68.20	-14.15	H	PEAK	Pass	Band Edge
	802.11a	149	11490.00	47.13	74.00	-26.87	V	PEAK	Pass	Harmonic
31	802.11a	157	-	-	-	-	-	-	-	Band Edge
	802.11a	157	11570	45.92	74.00	-28.08	V	PEAK	Pass	Harmonic
32	802.11a	165	5941.25	54.87	68.20	-13.33	V	PEAK	Pass	Band Edge
	802.11a	165	11650.00	36.75	54.00	-17.25	V	AVERAGE	Pass	Harmonic
33	802.11n HT20	149	5640.46	54.50	68.20	-13.70	V	PEAK	Pass	Band Edge
	802.11n HT20	149	11490.00	36.61	54.00	-17.39	H	AVERAGE	Pass	Harmonic
34	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	157	7715.00	48.43	74.00	-25.57	V	PEAK	Pass	Harmonic
35	802.11n HT20	165	5936.75	55.42	68.20	-12.78	H	PEAK	Pass	Band Edge
	802.11n HT20	165	11650.00	36.65	54.00	-17.35	H	AVERAGE	Pass	Harmonic
36	802.11n HT40	151	5941.03	55.35	68.20	-12.85	H	PEAK	Pass	Band Edge
	802.11n HT40	151	11510.00	36.50	54.00	-17.50	V	AVERAGE	Pass	Harmonic
37	802.11n HT40	159	5928.77	54.94	68.20	-13.26	H	PEAK	Pass	Band Edge
	802.11n HT40	159	11590.00	36.67	54.00	-17.33	V	AVERAGE	Pass	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
38	802.11ac VHT40	159	5944.27	54.80	68.20	-13.40	V	PEAK	Pass	Band Edge
	802.11ac VHT40	159	11590.00	36.60	54.00	-17.40	V	AVERAGE	Pass	Harmonic
39	802.11ac VHT80	155	5930.75	54.86	68.20	-13.34	V	PEAK	Pass	Band Edge
	802.11ac VHT80	155	11550.00	36.37	54.00	-17.63	H	AVERAGE	Pass	Harmonic
22	802.11n HT40	62	34.85	33.55	40.00	-6.45	V	PEAK	Pass	LF
35	802.11n HT20	165	34.85	32.54	40.00	-7.46	V	QP	Pass	LF





Note:

1. Only the worse cases have assessed LF mode to test.
2. For U-NII-3 802.11ac VHT40, the ch159 is verified by referring to their higher conducted power.

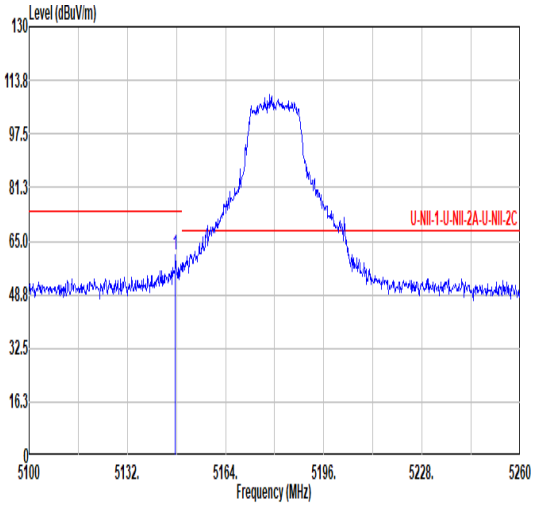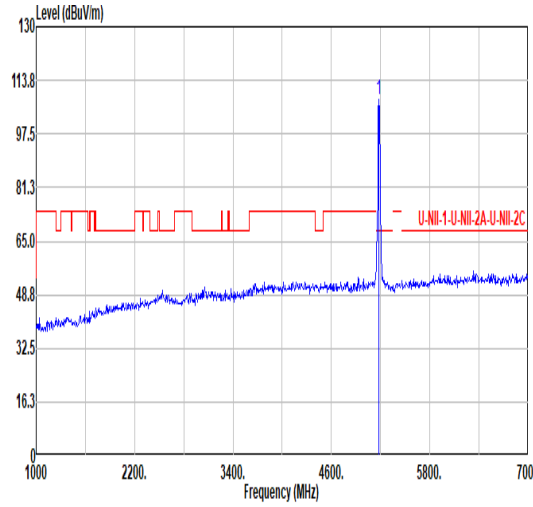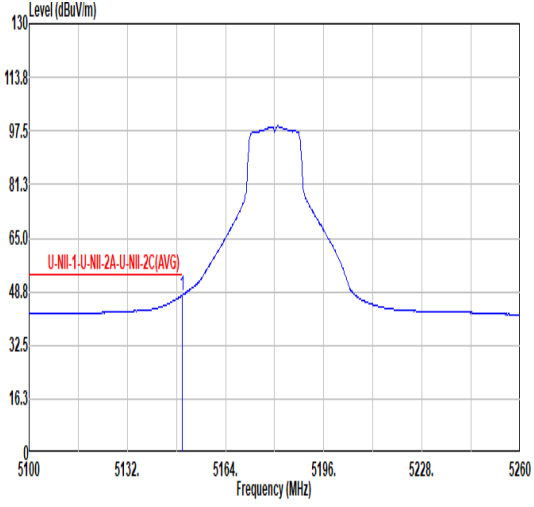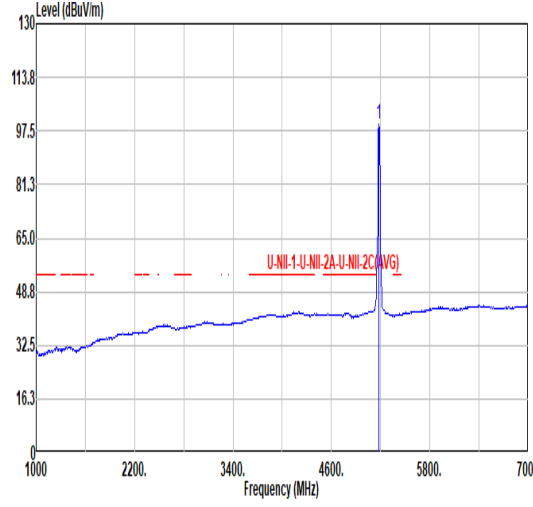

Mode	1																																																																																			
	Band Edge																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="263 1176 798 1310"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.68</td> <td>61.02</td> <td>74.00</td> <td>-12.98</td> <td>48.84</td> <td>34.20</td> <td>9.78</td> <td>31.00</td> <td>0.00</td> <td>128</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.68	61.02	74.00	-12.98	48.84	34.20	9.78	31.00	0.00	128	45	PEAK	 <table border="1" data-bbox="901 1176 1436 1310"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.06</td> <td>-----</td> <td>-----</td> <td>95.77</td> <td>34.30</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>128</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	108.06	-----	-----	95.77	34.30	9.81	31.82	0.00	128	45	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5147.68	61.02	74.00	-12.98	48.84	34.20	9.78	31.00	0.00	128	45	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	108.06	-----	-----	95.77	34.30	9.81	31.82	0.00	128	45	PEAK																																																																								
Avg	 <table border="1" data-bbox="263 1859 798 1993"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.92</td> <td>47.66</td> <td>54.00</td> <td>-6.34</td> <td>35.47</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>128</td> <td>45</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.92	47.66	54.00	-6.34	35.47	34.20	9.79	31.00	0.00	128	45	AVERAGE	 <table border="1" data-bbox="901 1859 1436 1993"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.37</td> <td>-----</td> <td>-----</td> <td>87.05</td> <td>34.33</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>128</td> <td>45</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	99.37	-----	-----	87.05	34.33	9.81	31.82	0.00	128	45	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5149.92	47.66	54.00	-6.34	35.47	34.20	9.79	31.00	0.00	128	45	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	99.37	-----	-----	87.05	34.33	9.81	31.82	0.00	128	45	AVERAGE																																																																								

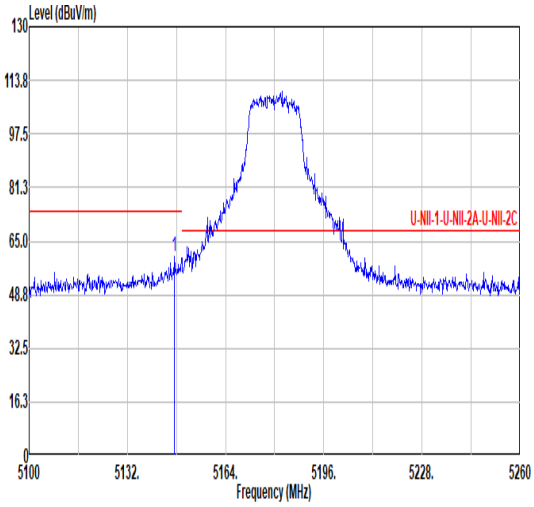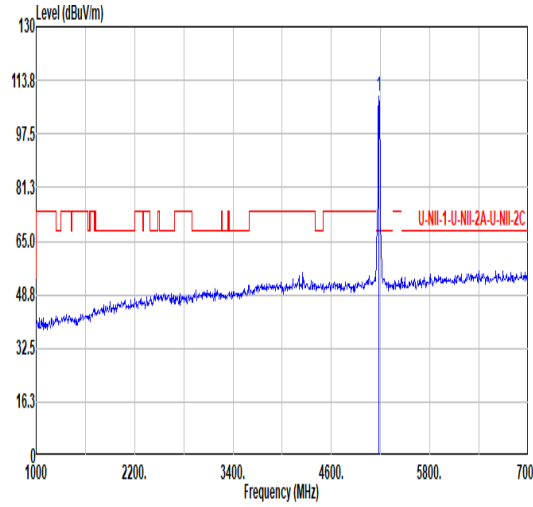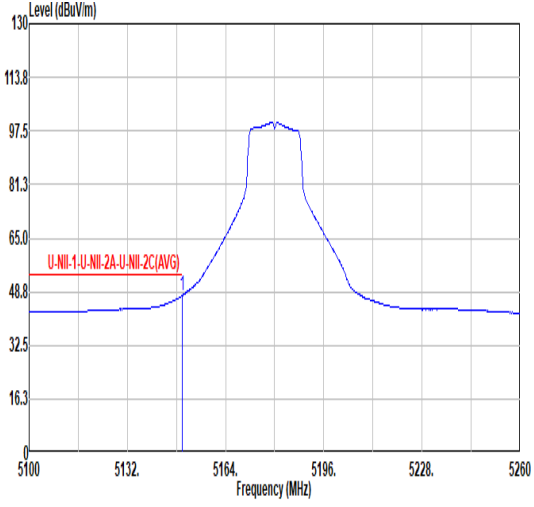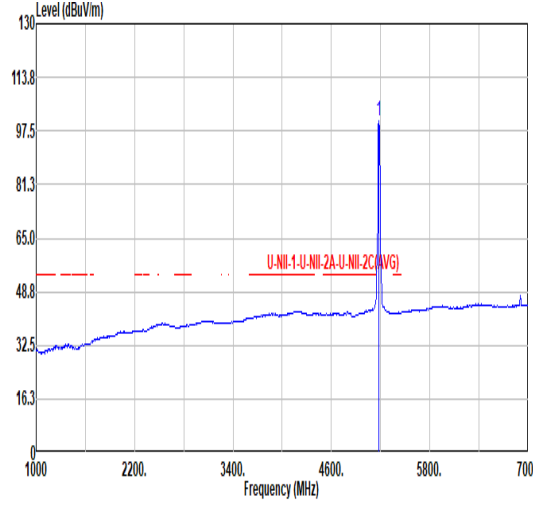

Mode	1																																																																																	
	Band Edge																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <table border="1" data-bbox="263 1176 798 1310"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.36</td> <td>60.30</td> <td>74.00</td> <td>-13.70</td> <td>48.12</td> <td>34.20</td> <td>9.78</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5147.36	60.30	74.00	-13.70	48.12	34.20	9.78	31.00	0.00	100	87	PEAK	 <table border="1" data-bbox="901 1176 1436 1310"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.70</td> <td>-----</td> <td>-----</td> <td>96.38</td> <td>34.33</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5180.00	108.70	-----	-----	96.38	34.33	9.81	31.82	0.00	100	87	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5147.36	60.30	74.00	-13.70	48.12	34.20	9.78	31.00	0.00	100	87	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5180.00	108.70	-----	-----	96.38	34.33	9.81	31.82	0.00	100	87	PEAK																																																																						
Avg	 <table border="1" data-bbox="263 1859 798 1993"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.92</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>35.44</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5149.92	47.63	54.00	-6.37	35.44	34.20	9.79	31.00	0.00	100	87	AVERAGE	 <table border="1" data-bbox="901 1859 1436 1993"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.44</td> <td>-----</td> <td>-----</td> <td>88.12</td> <td>34.33</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>100</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5180.00	100.44	-----	-----	88.12	34.33	9.81	31.82	0.00	100	87	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5149.92	47.63	54.00	-6.37	35.44	34.20	9.79	31.00	0.00	100	87	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5180.00	100.44	-----	-----	88.12	34.33	9.81	31.82	0.00	100	87	AVERAGE																																																																						



Mode	1																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10355.00</td> <td>45.48</td> <td>68.20</td> <td>-22.72</td> <td>54.79</td> <td>37.46</td> <td>14.13</td> <td>60.90</td> <td>0.00</td> <td>100</td> <td>242 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10355.00	45.48	68.20	-22.72	54.79	37.46	14.13	60.90	0.00	100	242 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.91</td> <td>68.20</td> <td>-22.29</td> <td>55.22</td> <td>37.46</td> <td>14.13</td> <td>60.90</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	45.91	68.20	-22.29	55.22	37.46	14.13	60.90	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10355.00	45.48	68.20	-22.72	54.79	37.46	14.13	60.90	0.00	100	242 Peak																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 10360.00	45.91	68.20	-22.29	55.22	37.46	14.13	60.90	0.00	---	---	PEAK																																																																							



Mode	2																																																																																		
	Harmonic																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>46.68</td> <td>68.20</td> <td>-21.52</td> <td>55.82</td> <td>37.58</td> <td>14.18</td> <td>60.90</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	46.68	68.20	-21.52	55.82	37.58	14.18	60.90	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>47.49</td> <td>68.20</td> <td>-20.71</td> <td>56.63</td> <td>37.58</td> <td>14.18</td> <td>60.90</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10440.00	47.49	68.20	-20.71	56.63	37.58	14.18	60.90	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 10440.00	46.68	68.20	-21.52	55.82	37.58	14.18	60.90	0.00	---	---	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 10440.00	47.49	68.20	-20.71	56.63	37.58	14.18	60.90	0.00	---	---	PEAK																																																																								



Mode	3																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>46.36</td> <td>68.20</td> <td>-21.84</td> <td>55.38</td> <td>37.66</td> <td>14.21</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10480.00	46.36	68.20	-21.84	55.38	37.66	14.21	60.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>48.35</td> <td>68.20</td> <td>-19.85</td> <td>57.37</td> <td>37.66</td> <td>14.21</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10480.00	48.35	68.20	-19.85	57.37	37.66	14.21	60.89	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 10480.00	46.36	68.20	-21.84	55.38	37.66	14.21	60.89	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 10480.00	48.35	68.20	-19.85	57.37	37.66	14.21	60.89	0.00	---	---	PEAK																																																																					



Mode	4																																																																																											
	Harmonic																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>46.60</td> <td>68.20</td> <td>-21.60</td> <td>55.51</td> <td>37.74</td> <td>14.24</td> <td>60.89</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10520.00	46.60	68.20	-21.60	55.51	37.74	14.24	60.89	0.00									--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>46.66</td> <td>68.20</td> <td>-21.54</td> <td>55.57</td> <td>37.74</td> <td>14.24</td> <td>60.89</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10520.00	46.66	68.20	-21.54	55.57	37.74	14.24	60.89	0.00									--- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 10520.00	46.60	68.20	-21.60	55.51	37.74	14.24	60.89	0.00																																																																																				
								--- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 10520.00	46.66	68.20	-21.54	55.57	37.74	14.24	60.89	0.00																																																																																				
								--- PEAK																																																																																				







Mode	5																																																																									
	Harmonic																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10600.01</td> <td>46.03</td> <td>74.00</td> <td>-27.97</td> <td>54.73</td> <td>37.90</td> <td>14.29</td> <td>60.89</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10600.01	46.03	74.00	-27.97	54.73	37.90	14.29	60.89	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10600.01</td> <td>46.58</td> <td>74.00</td> <td>-27.42</td> <td>55.28</td> <td>37.90</td> <td>14.29</td> <td>60.89</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10600.01	46.58	74.00	-27.42	55.28	37.90	14.29	60.89	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 10600.01	46.03	74.00	-27.97	54.73	37.90	14.29	60.89	0.00																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 10600.01	46.58	74.00	-27.42	55.28	37.90	14.29	60.89	0.00																																																																		



Mode	6																																																																																																	
	Band Edge																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>56.12</td> <td>74.00</td> <td>-17.88</td> <td>43.63</td> <td>34.50</td> <td>9.91</td> <td>31.92</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>72 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.10	56.12	74.00	-17.88	43.63	34.50	9.91	31.92							0.00	100								72 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>109.30</td> <td>-----</td> <td>-----</td> <td>96.75</td> <td>34.56</td> <td>9.90</td> <td>31.91</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>72 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	109.30	-----	-----	96.75	34.56	9.90	31.91							0.00	100								72 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5350.10	56.12	74.00	-17.88	43.63	34.50	9.91	31.92																																																																																											
						0.00	100																																																																																											
							72 PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5320.00	109.30	-----	-----	96.75	34.56	9.90	31.91																																																																																											
						0.00	100																																																																																											
							72 PEAK																																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>33.50</td> <td>34.50</td> <td>9.91</td> <td>31.92</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>72 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.10	45.99	54.00	-8.01	33.50	34.50	9.91	31.92							0.00	100								72 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>100.00</td> <td>-----</td> <td>-----</td> <td>88.25</td> <td>34.56</td> <td>9.90</td> <td>31.91</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>72 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	100.00	-----	-----	88.25	34.56	9.90	31.91							0.00	100								72 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5350.10	45.99	54.00	-8.01	33.50	34.50	9.91	31.92																																																																																											
						0.00	100																																																																																											
							72 AVERAGE																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5320.00	100.00	-----	-----	88.25	34.56	9.90	31.91																																																																																											
						0.00	100																																																																																											
							72 AVERAGE																																																																																											

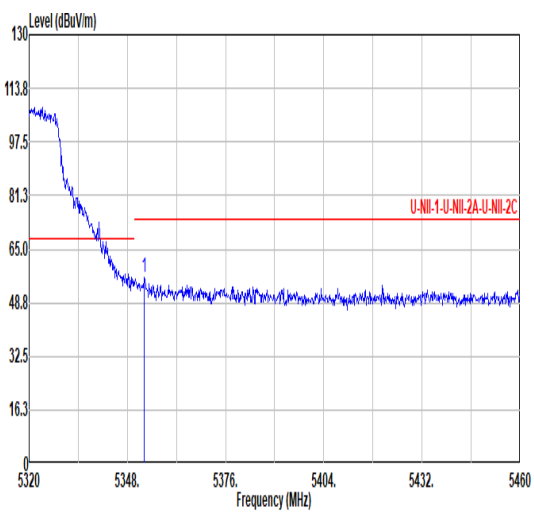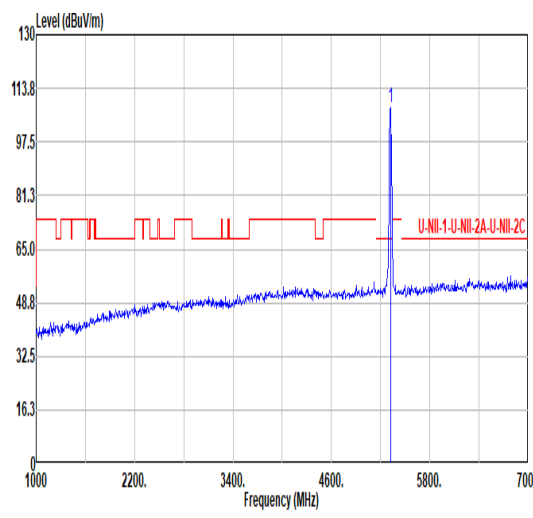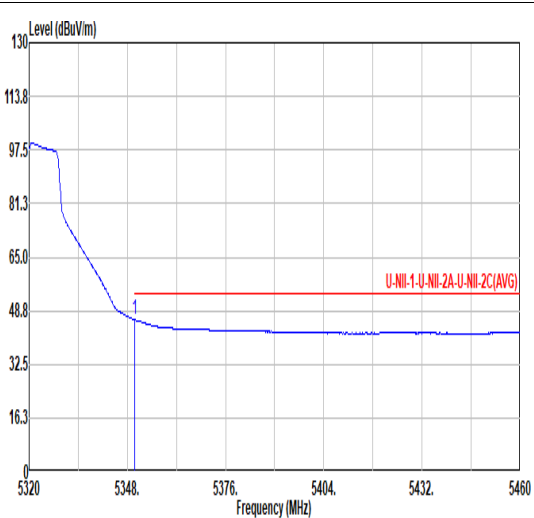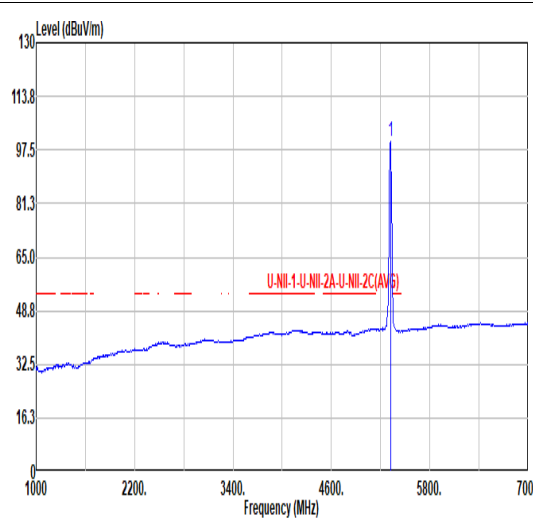

Mode	6																																																																											
	Band Edge																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																											
ANT	1																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5320 5348 5376 5404 5432 5460</p> <p>Frequency (MHz)</p> <p style="color: red;">U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.90</td> <td>56.20</td> <td>74.00</td> <td>-17.80</td> <td>43.71</td> <td>34.51</td> <td>9.91</td> <td>31.93</td> <td>0.00</td> <td>100</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.90	56.20	74.00	-17.80	43.71	34.51	9.91	31.93	0.00	100	122	PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p style="color: red;">U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>108.15</td> <td>-----</td> <td>-----</td> <td>95.60</td> <td>34.56</td> <td>9.90</td> <td>31.91</td> <td>0.00</td> <td>100</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	108.15	-----	-----	95.60	34.56	9.90	31.91	0.00	100	122	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5352.90	56.20	74.00	-17.80	43.71	34.51	9.91	31.93	0.00	100	122	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5320.00	108.15	-----	-----	95.60	34.56	9.90	31.91	0.00	100	122	PEAK																																																																
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5320 5348 5376 5404 5432 5460</p> <p>Frequency (MHz)</p> <p style="color: red;">U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>46.11</td> <td>54.00</td> <td>-7.89</td> <td>33.62</td> <td>34.50</td> <td>9.91</td> <td>31.92</td> <td>0.00</td> <td>100</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.10	46.11	54.00	-7.89	33.62	34.50	9.91	31.92	0.00	100	122	AVERAGE	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p style="color: red;">U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.03</td> <td>-----</td> <td>-----</td> <td>87.48</td> <td>34.56</td> <td>9.90</td> <td>31.91</td> <td>0.00</td> <td>100</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	100.03	-----	-----	87.48	34.56	9.90	31.91	0.00	100	122	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5350.10	46.11	54.00	-7.89	33.62	34.50	9.91	31.92	0.00	100	122	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5320.00	100.03	-----	-----	87.48	34.56	9.90	31.91	0.00	100	122	AVERAGE																																																																







Mode	6																																																																													
	Harmonic																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak																																																																														
Avg																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>47.00</td> <td>74.00</td> <td>-27.00</td> <td>55.67</td> <td>37.90</td> <td>14.32</td> <td>60.89</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	47.00	74.00	-27.00	55.67	37.90	14.32	60.89	0.00	---	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>46.50</td> <td>74.00</td> <td>-27.50</td> <td>55.17</td> <td>37.90</td> <td>14.32</td> <td>60.89</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	46.50	74.00	-27.50	55.17	37.90	14.32	60.89	0.00	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10640.00	47.00	74.00	-27.00	55.67	37.90	14.32	60.89	0.00	---																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10640.00	46.50	74.00	-27.50	55.17	37.90	14.32	60.89	0.00	---																																																																					



Mode	7																																																																																
	Band Edge																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal	Fundamental																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.00</td> <td>54.48</td> <td>74.00</td> <td>-19.52</td> <td>41.75</td> <td>34.70</td> <td>10.01</td> <td>31.98</td> <td>0.00</td> <td>100</td> <td>134 PEAK</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5469.10</td> <td>57.31</td> <td>68.20</td> <td>-10.89</td> <td>44.57</td> <td>34.70</td> <td>10.04</td> <td>32.00</td> <td>0.00</td> <td>100</td> <td>134 PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Factor	1	5449.00	54.48	74.00	-19.52	41.75	34.70	10.01	31.98	0.00	100	134 PEAK	0.00	2	5469.10	57.31	68.20	-10.89	44.57	34.70	10.04	32.00	0.00	100	134 PEAK	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>107.25</td> <td>-----</td> <td>-----</td> <td>94.48</td> <td>34.70</td> <td>10.08</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>134 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5500.00	107.25	-----	-----	94.48	34.70	10.08	32.01	0.00	100	134 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	Factor																																																																							
1	5449.00	54.48	74.00	-19.52	41.75	34.70	10.01	31.98	0.00	100	134 PEAK	0.00																																																																					
2	5469.10	57.31	68.20	-10.89	44.57	34.70	10.04	32.00	0.00	100	134 PEAK	0.00																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																						
1	5500.00	107.25	-----	-----	94.48	34.70	10.08	32.01	0.00	100	134 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.00</td> <td>43.58</td> <td>54.00</td> <td>-10.42</td> <td>30.84</td> <td>34.70</td> <td>10.03</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>134 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5459.00	43.58	54.00	-10.42	30.84	34.70	10.03	31.99	0.00	100	134 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.10</td> <td>-----</td> <td>-----</td> <td>85.32</td> <td>34.70</td> <td>10.09</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>134 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5500.00	98.10	-----	-----	85.32	34.70	10.09	32.01	0.00	100	134 AVERAGE															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																						
1	5459.00	43.58	54.00	-10.42	30.84	34.70	10.03	31.99	0.00	100	134 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																						
1	5500.00	98.10	-----	-----	85.32	34.70	10.09	32.01	0.00	100	134 AVERAGE																																																																						

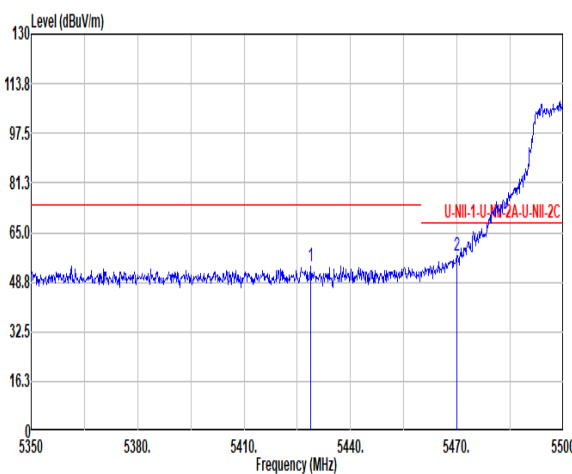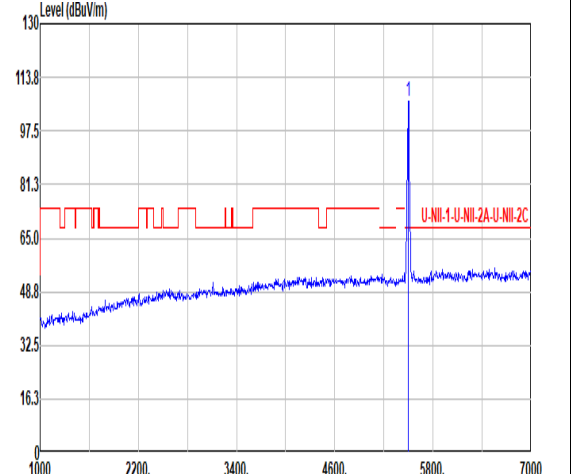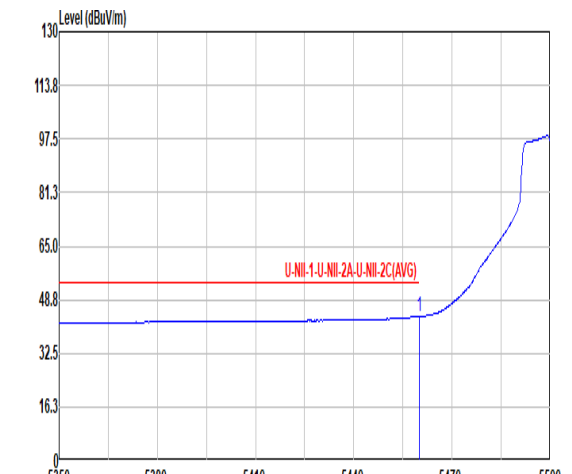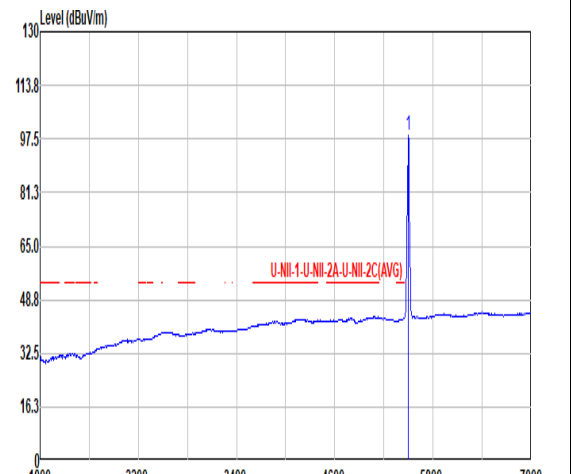

Mode	7																																																																																
	Band Edge																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																
ANT	1																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5428.75</td> <td>54.11</td> <td>74.00</td> <td>-19.89</td> <td>41.40</td> <td>34.70</td> <td>9.98</td> <td>31.97</td> <td>0.00</td> <td>100</td> <td>99 PEAK</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5469.85</td> <td>57.63</td> <td>68.20</td> <td>-10.57</td> <td>44.89</td> <td>34.70</td> <td>10.04</td> <td>32.00</td> <td>0.00</td> <td>100</td> <td>99 PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	dB	1	5428.75	54.11	74.00	-19.89	41.40	34.70	9.98	31.97	0.00	100	99 PEAK	0.00	2	5469.85	57.63	68.20	-10.57	44.89	34.70	10.04	32.00	0.00	100	99 PEAK	0.00	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>106.67</td> <td>-----</td> <td>93.89</td> <td>34.70</td> <td>10.09</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>99</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5500.00	106.67	-----	93.89	34.70	10.09	32.01	0.00	100	99	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	dB																																																																							
1	5428.75	54.11	74.00	-19.89	41.40	34.70	9.98	31.97	0.00	100	99 PEAK	0.00																																																																					
2	5469.85	57.63	68.20	-10.57	44.89	34.70	10.04	32.00	0.00	100	99 PEAK	0.00																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																						
1	5500.00	106.67	-----	93.89	34.70	10.09	32.01	0.00	100	99	PEAK																																																																						
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>43.63</td> <td>54.00</td> <td>-10.37</td> <td>30.89</td> <td>34.70</td> <td>10.03</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>99 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5459.95	43.63	54.00	-10.37	30.89	34.70	10.03	31.99	0.00	100	99 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.54</td> <td>-----</td> <td>85.76</td> <td>34.70</td> <td>10.09</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>99</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5500.00	98.54	-----	85.76	34.70	10.09	32.01	0.00	100	99	AVERAGE															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																						
1	5459.95	43.63	54.00	-10.37	30.89	34.70	10.03	31.99	0.00	100	99 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																						
1	5500.00	98.54	-----	85.76	34.70	10.09	32.01	0.00	100	99	AVERAGE																																																																						






Mode	7																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>55.28</td> <td>38.00</td> <td>14.56</td> <td>60.88</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	46.96	74.00	-27.04	55.28	38.00	14.56	60.88	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>46.57</td> <td>74.00</td> <td>-27.43</td> <td>54.89</td> <td>38.00</td> <td>14.56</td> <td>60.88</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	46.57	74.00	-27.43	54.89	38.00	14.56	60.88	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11000.00	46.96	74.00	-27.04	55.28	38.00	14.56	60.88	0.00	---	---	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11000.00	46.57	74.00	-27.43	54.89	38.00	14.56	60.88	0.00	---	---	PEAK																																																																							



Mode	8																																																																																		
	Harmonic																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.58</td> <td>74.00</td> <td>-27.42</td> <td>54.71</td> <td>38.06</td> <td>14.68</td> <td>60.87</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11160.00	46.58	74.00	-27.42	54.71	38.06	14.68	60.87	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.12</td> <td>74.00</td> <td>-26.88</td> <td>55.25</td> <td>38.06</td> <td>14.68</td> <td>60.87</td> <td>0.00</td> </tr> <tr> <td>2 11160.00</td> <td>36.11</td> <td>54.00</td> <td>-17.89</td> <td>44.24</td> <td>38.06</td> <td>14.68</td> <td>60.87</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11160.00	47.12	74.00	-26.88	55.25	38.06	14.68	60.87	0.00	2 11160.00	36.11	54.00	-17.89	44.24	38.06	14.68	60.87	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1 11160.00	46.58	74.00	-27.42	54.71	38.06	14.68	60.87	0.00																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1 11160.00	47.12	74.00	-26.88	55.25	38.06	14.68	60.87	0.00																																																																											
2 11160.00	36.11	54.00	-17.89	44.24	38.06	14.68	60.87	0.00																																																																											

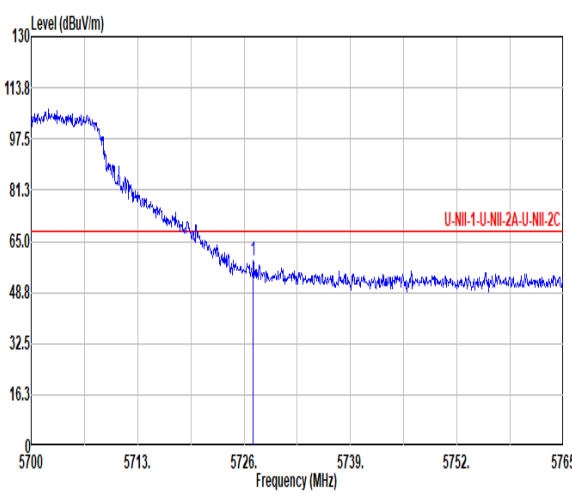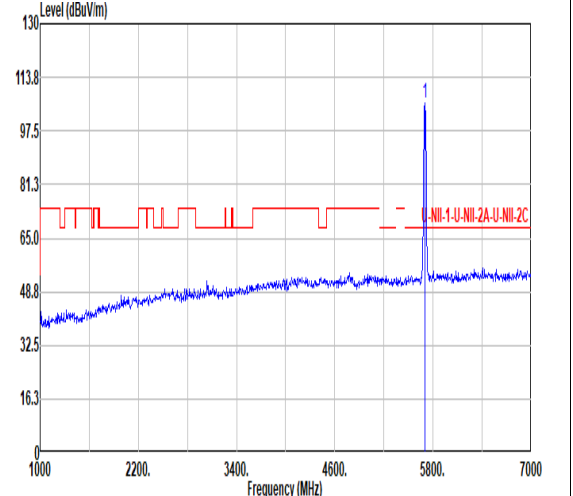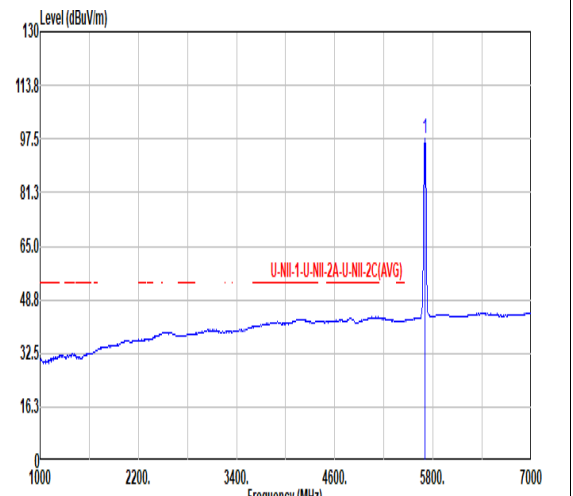

Mode	9																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 <table border="1" data-bbox="255 1120 829 1243"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.11</td> <td>58.66</td> <td>68.20</td> <td>-9.54</td> <td>45.69</td> <td>34.65</td> <td>10.35</td> <td>32.03</td> <td>0.00</td> <td>100</td> <td>182</td> <td>PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5727.11	58.66	68.20	-9.54	45.69	34.65	10.35	32.03	0.00	100	182	PEAK	0.00	 <table border="1" data-bbox="925 1120 1500 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>106.11</td> <td>-----</td> <td>93.14</td> <td>34.70</td> <td>10.32</td> <td>32.05</td> <td>0.00</td> <td>100</td> <td>182</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	106.11	-----	93.14	34.70	10.32	32.05	0.00	100	182	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																									
1	5727.11	58.66	68.20	-9.54	45.69	34.65	10.35	32.03	0.00	100	182	PEAK	0.00																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1	5700.00	106.11	-----	93.14	34.70	10.32	32.05	0.00	100	182	PEAK																																																																							
Avg	Blank	 <table border="1" data-bbox="925 1792 1500 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>97.40</td> <td>-----</td> <td>84.43</td> <td>34.69</td> <td>10.33</td> <td>32.05</td> <td>0.00</td> <td>100</td> <td>182</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	97.40	-----	84.43	34.69	10.33	32.05	0.00	100	182	AVERAGE																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1	5700.00	97.40	-----	84.43	34.69	10.33	32.05	0.00	100	182	AVERAGE																																																																							







Mode	9																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.81</td> <td>60.75</td> <td>68.20</td> <td>-7.45</td> <td>47.78</td> <td>34.65</td> <td>10.35</td> <td>32.03</td> <td>0.00</td> <td>100</td> <td>101 PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.81	60.75	68.20	-7.45	47.78	34.65	10.35	32.03	0.00	100	101 PEAK	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>108.42</td> <td>-----</td> <td>-----</td> <td>95.45</td> <td>34.70</td> <td>10.32</td> <td>32.05</td> <td>0.00</td> <td>100</td> <td>101 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00	108.42	-----	-----	95.45	34.70	10.32	32.05	0.00	100	101 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5725.81	60.75	68.20	-7.45	47.78	34.65	10.35	32.03	0.00	100	101 PEAK	0.00																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 5700.00	108.42	-----	-----	95.45	34.70	10.32	32.05	0.00	100	101 PEAK																																																																										
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>100.74</td> <td>-----</td> <td>-----</td> <td>87.77</td> <td>34.70</td> <td>10.32</td> <td>32.05</td> <td>0.00</td> <td>100</td> <td>101 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00	100.74	-----	-----	87.77	34.70	10.32	32.05	0.00	100	101 AVERAGE																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 5700.00	100.74	-----	-----	87.77	34.70	10.32	32.05	0.00	100	101 AVERAGE																																																																										







Mode	9																																																																																		
	Harmonic																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>46.99</td> <td>74.00</td> <td>-27.01</td> <td>54.80</td> <td>38.20</td> <td>14.85</td> <td>60.86</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11400.00	46.99	74.00	-27.01	54.80	38.20	14.85	60.86	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>47.55</td> <td>74.00</td> <td>-26.45</td> <td>55.36</td> <td>38.20</td> <td>14.85</td> <td>60.86</td> <td>0.00</td> </tr> <tr> <td>2 11400.00</td> <td>36.51</td> <td>54.00</td> <td>-17.49</td> <td>44.32</td> <td>38.20</td> <td>14.85</td> <td>60.86</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11400.00	47.55	74.00	-26.45	55.36	38.20	14.85	60.86	0.00	2 11400.00	36.51	54.00	-17.49	44.32	38.20	14.85	60.86	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1 11400.00	46.99	74.00	-27.01	54.80	38.20	14.85	60.86	0.00																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1 11400.00	47.55	74.00	-26.45	55.36	38.20	14.85	60.86	0.00																																																																											
2 11400.00	36.51	54.00	-17.49	44.32	38.20	14.85	60.86	0.00																																																																											

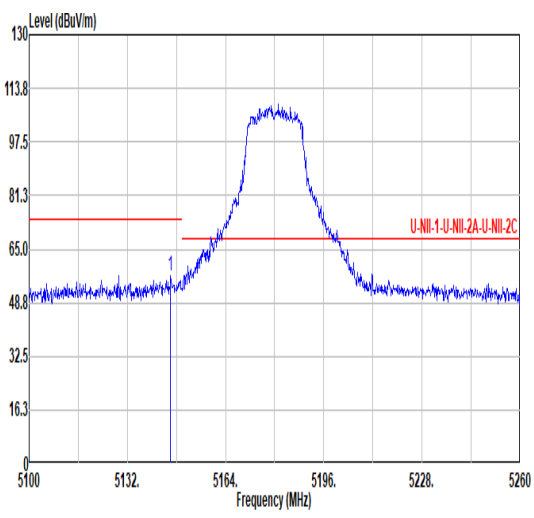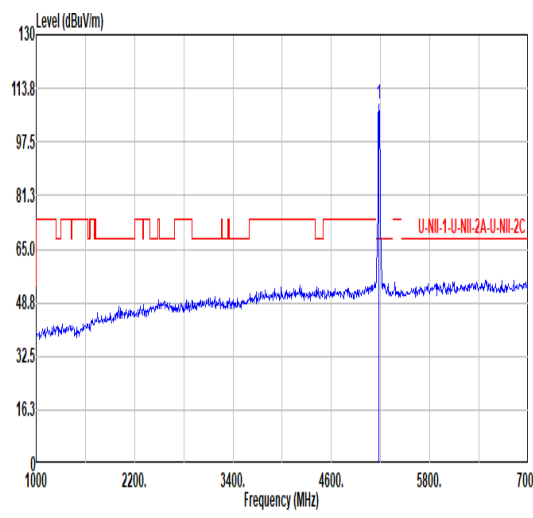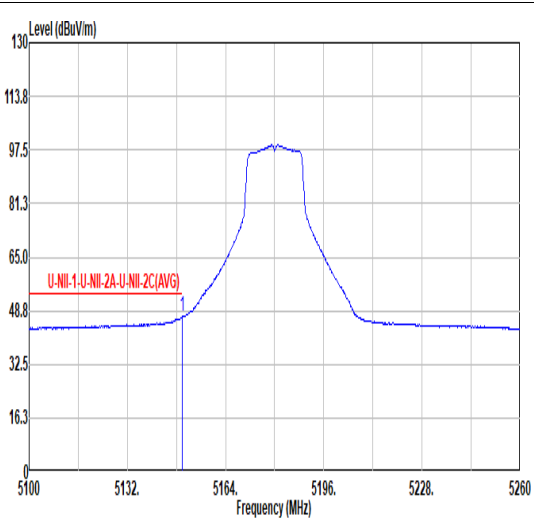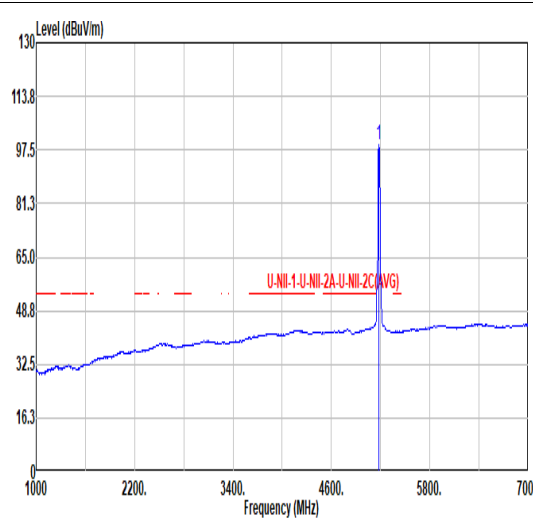

Mode	10																																																																																															
	Band Edge																																																																																															
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHZ																																																																																															
ANT	1																																																																																															
Pol.	Horizontal	Fundamental																																																																																														
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.08</td> <td>57.13</td> <td>74.00</td> <td>-16.87</td> <td>44.95</td> <td>34.20</td> <td>9.78</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5146.08	57.13	74.00	-16.87	44.95	34.20	9.78	31.00	0.00	100	68	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.75</td> <td>-----</td> <td>-----</td> <td>96.43</td> <td>34.33</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5180.00	108.75	-----	-----	96.43	34.33	9.81	31.82	0.00	100	68	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5146.08	57.13	74.00	-16.87	44.95	34.20	9.78	31.00	0.00	100	68	PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5180.00	108.75	-----	-----	96.43	34.33	9.81	31.82	0.00	100	68	PEAK																																																																																				
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.92</td> <td>46.90</td> <td>54.00</td> <td>-7.10</td> <td>34.71</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5149.92	46.90	54.00	-7.10	34.71	34.20	9.79	31.00	0.00	100	68	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.04</td> <td>-----</td> <td>-----</td> <td>86.72</td> <td>34.33</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5180.00	99.04	-----	-----	86.72	34.33	9.81	31.82	0.00	100	68	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5149.92	46.90	54.00	-7.10	34.71	34.20	9.79	31.00	0.00	100	68	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5180.00	99.04	-----	-----	86.72	34.33	9.81	31.82	0.00	100	68	AVERAGE																																																																																				

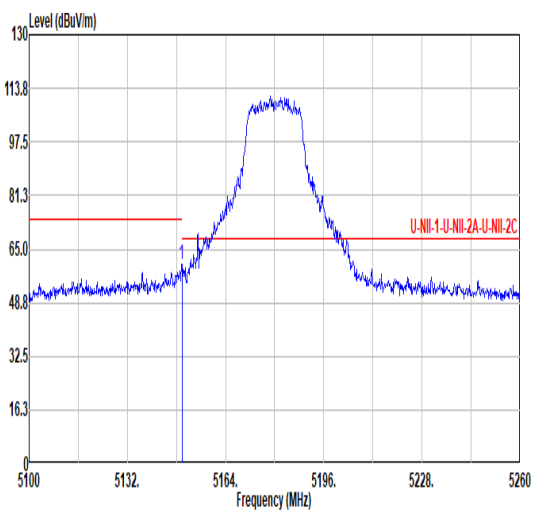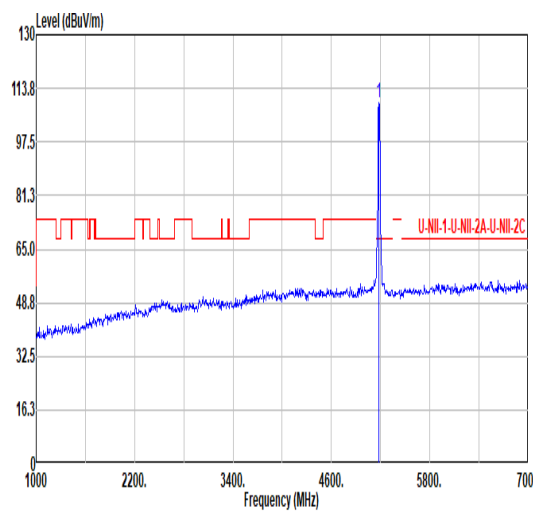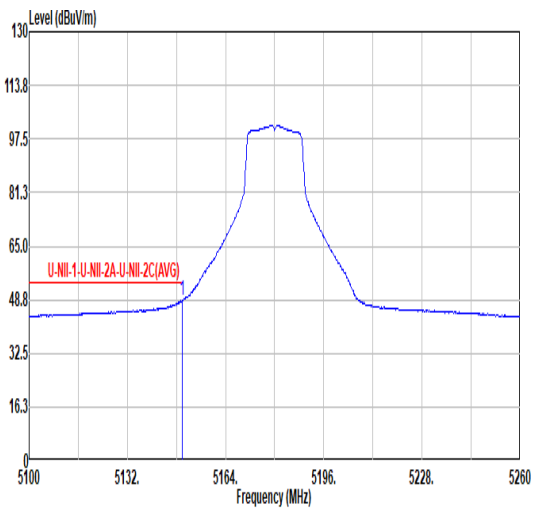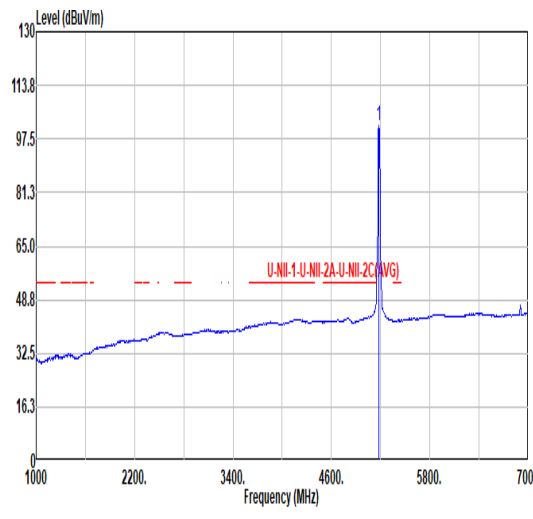

		10																																																																														
Mode		Band Edge																																																																														
		U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																														
ANT		1																																																																														
Pol.		Vertical					Fundamental																																																																									
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5100 5132 5164 5196 5228 5260</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>60.57</td> <td>74.00</td> <td>-13.43</td> <td>48.38</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	60.57	74.00	-13.43	48.38	34.20	9.79	31.00	0.00	100	118	PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.34</td> <td>-----</td> <td>-----</td> <td>97.05</td> <td>34.30</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	109.34	-----	-----	97.05	34.30	9.81	31.82	0.00	100	118	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5149.76	60.57	74.00	-13.43	48.38	34.20	9.79	31.00	0.00	100	118	PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5180.00	109.34	-----	-----	97.05	34.30	9.81	31.82	0.00	100	118	PEAK																																																																				
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5100 5132 5164 5196 5228 5260</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.92</td> <td>48.54</td> <td>54.00</td> <td>-5.46</td> <td>36.35</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.92	48.54	54.00	-5.46	36.35	34.20	9.79	31.00	0.00	100	118	AVERAGE	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.79</td> <td>-----</td> <td>-----</td> <td>89.47</td> <td>34.33</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.79	-----	-----	89.47	34.33	9.81	31.82	0.00	100	118	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5149.92	48.54	54.00	-5.46	36.35	34.20	9.79	31.00	0.00	100	118	AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5180.00	101.79	-----	-----	89.47	34.33	9.81	31.82	0.00	100	118	AVERAGE																																																																				



Mode	10																																																																																		
	Harmonic																																																																																		
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.85</td> <td>68.20</td> <td>-22.35</td> <td>55.16</td> <td>37.46</td> <td>14.13</td> <td>60.90</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	45.85	68.20	-22.35	55.16	37.46	14.13	60.90	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>46.31</td> <td>68.20</td> <td>-21.89</td> <td>55.62</td> <td>37.46</td> <td>14.13</td> <td>60.90</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	46.31	68.20	-21.89	55.62	37.46	14.13	60.90	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 10360.00	45.85	68.20	-22.35	55.16	37.46	14.13	60.90	0.00	---	---	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 10360.00	46.31	68.20	-21.89	55.62	37.46	14.13	60.90	0.00	---	---	PEAK																																																																								



Mode	11																																																																											
	Harmonic																																																																											
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>47.96</td> <td>68.20</td> <td>-20.24</td> <td>57.10</td> <td>37.58</td> <td>14.18</td> <td>60.90</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10440.00	47.96	68.20	-20.24	57.10	37.58	14.18	60.90	0.00	--- PEAK	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>46.40</td> <td>68.20</td> <td>-21.80</td> <td>55.54</td> <td>37.58</td> <td>14.18</td> <td>60.90</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10440.00	46.40	68.20	-21.80	55.54	37.58	14.18	60.90	0.00	--- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 10440.00	47.96	68.20	-20.24	57.10	37.58	14.18	60.90	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 10440.00	46.40	68.20	-21.80	55.54	37.58	14.18	60.90	0.00	--- PEAK																																																																			



Mode	12																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>45.75</td> <td>68.20</td> <td>-22.45</td> <td>54.77</td> <td>37.66</td> <td>14.21</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10480.00	45.75	68.20	-22.45	54.77	37.66	14.21	60.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>46.17</td> <td>68.20</td> <td>-22.03</td> <td>55.19</td> <td>37.66</td> <td>14.21</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10480.00	46.17	68.20	-22.03	55.19	37.66	14.21	60.89	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 10480.00	45.75	68.20	-22.45	54.77	37.66	14.21	60.89	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 10480.00	46.17	68.20	-22.03	55.19	37.66	14.21	60.89	0.00	---	---	PEAK																																																																					



Mode	13																																																																																		
	Harmonic																																																																																		
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5280MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10560.00</td> <td>46.04</td> <td>68.20</td> <td>-22.16</td> <td>54.85</td> <td>37.82</td> <td>14.26</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10560.00	46.04	68.20	-22.16	54.85	37.82	14.26	60.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10560.00</td> <td>45.90</td> <td>68.20</td> <td>-22.30</td> <td>54.71</td> <td>37.82</td> <td>14.26</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10560.00	45.90	68.20	-22.30	54.71	37.82	14.26	60.89	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 10560.00	46.04	68.20	-22.16	54.85	37.82	14.26	60.89	0.00	---	---	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 10560.00	45.90	68.20	-22.30	54.71	37.82	14.26	60.89	0.00	---	---	PEAK																																																																								







Mode	14																																																																									
	Harmonic																																																																									
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak																																																																										
Avg																																																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10600.01</td> <td>46.06</td> <td>74.00</td> <td>-27.94</td> <td>54.76</td> <td>37.90</td> <td>14.29</td> <td>60.89</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10600.01	46.06	74.00	-27.94	54.76	37.90	14.29	60.89	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10600.01</td> <td>45.28</td> <td>74.00</td> <td>-28.72</td> <td>53.98</td> <td>37.90</td> <td>14.29</td> <td>60.89</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10600.01	45.28	74.00	-28.72	53.98	37.90	14.29	60.89	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 10600.01	46.06	74.00	-27.94	54.76	37.90	14.29	60.89	0.00																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 10600.01	45.28	74.00	-28.72	53.98	37.90	14.29	60.89	0.00																																																																		



Mode	15																																																																	
	Band Edge																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5335.22 55.12 74.00 -18.88</td> <td>42.63 34.50</td> <td>9.91 31.92</td> <td>0.00</td> <td>100</td> <td>69</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5335.22 55.12 74.00 -18.88	42.63 34.50	9.91 31.92	0.00	100	69	PEAK		<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00 106.88</td> <td>-----</td> <td>94.33 34.56</td> <td>9.90 31.91</td> <td>0.00</td> <td>100</td> <td>69</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5320.00 106.88	-----	94.33 34.56	9.90 31.91	0.00	100	69	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5335.22 55.12 74.00 -18.88	42.63 34.50	9.91 31.92	0.00	100	69	PEAK																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5320.00 106.88	-----	94.33 34.56	9.90 31.91	0.00	100	69	PEAK																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.24 45.35 54.00 -8.65</td> <td>32.86 34.50</td> <td>9.91 31.92</td> <td>0.00</td> <td>100</td> <td>69</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5350.24 45.35 54.00 -8.65	32.86 34.50	9.91 31.92	0.00	100	69	AVERAGE		<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00 98.31</td> <td>-----</td> <td>85.76 34.56</td> <td>9.90 31.91</td> <td>0.00</td> <td>100</td> <td>69</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5320.00 98.31	-----	85.76 34.56	9.90 31.91	0.00	100	69	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5350.24 45.35 54.00 -8.65	32.86 34.50	9.91 31.92	0.00	100	69	AVERAGE																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5320.00 98.31	-----	85.76 34.56	9.90 31.91	0.00	100	69	AVERAGE																																																											

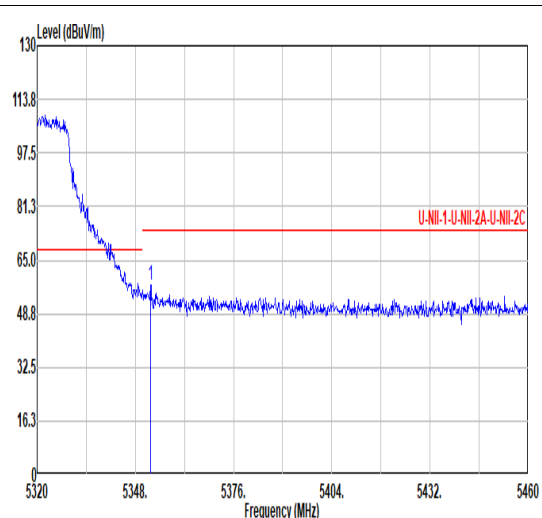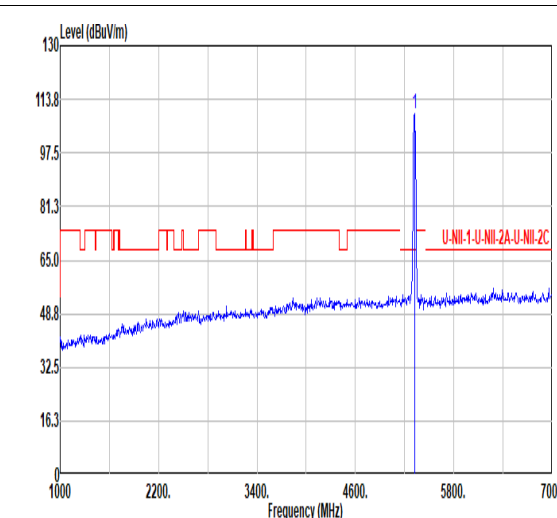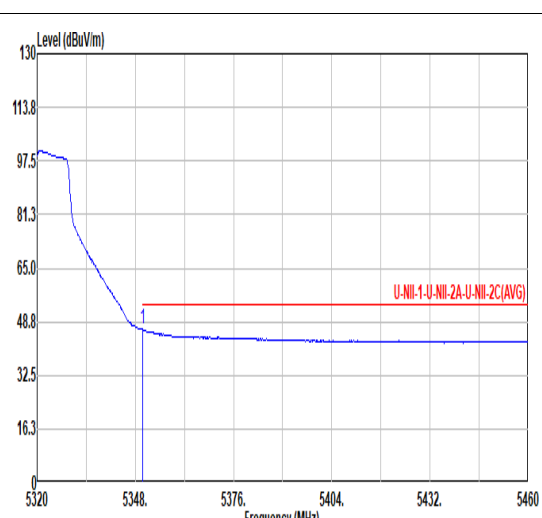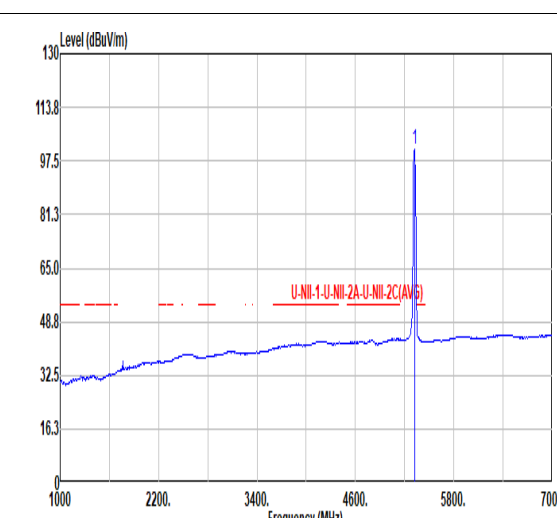

Mode	15																																																																																																	
	Band Edge																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal level starting at approximately 113.8 dBuV/m at 5320 MHz and decreasing to about 48.8 dBuV/m at 5460 MHz. A red limit line is shown at 65.0 dBuV/m. A peak is marked at 5352.34 MHz with a level of 57.63 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5352.34</td> <td>57.63</td> <td>74.00</td> <td>-16.37</td> <td>45.14</td> <td>34.51</td> <td>9.91</td> <td>31.93</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>118 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5352.34	57.63	74.00	-16.37	45.14	34.51	9.91	31.93							0.00	100								118 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level starting at approximately 32.5 dBuV/m at 1000 MHz and increasing to about 113.8 dBuV/m at 5320 MHz. A red limit line is shown at 65.0 dBuV/m. A peak is marked at 5320.00 MHz with a level of 109.18 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>109.18</td> <td>-----</td> <td>-----</td> <td>96.63</td> <td>34.56</td> <td>9.90</td> <td>31.91</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>118 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	109.18	-----	-----	96.63	34.56	9.90	31.91							0.00	100								118 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5352.34	57.63	74.00	-16.37	45.14	34.51	9.91	31.93																																																																																											
						0.00	100																																																																																											
							118 PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5320.00	109.18	-----	-----	96.63	34.56	9.90	31.91																																																																																											
						0.00	100																																																																																											
							118 PEAK																																																																																											
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization (Average). The plot shows a signal level starting at approximately 97.5 dBuV/m at 5320 MHz and decreasing to about 48.8 dBuV/m at 5460 MHz. A red limit line is shown at 65.0 dBuV/m. The average level is marked at 5350.10 MHz with a level of 46.46 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>46.46</td> <td>54.00</td> <td>-7.54</td> <td>33.97</td> <td>34.50</td> <td>9.91</td> <td>31.92</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>118 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.10	46.46	54.00	-7.54	33.97	34.50	9.91	31.92							0.00	100								118 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization (Average). The plot shows a signal level starting at approximately 32.5 dBuV/m at 1000 MHz and increasing to about 113.8 dBuV/m at 5320 MHz. A red limit line is shown at 65.0 dBuV/m. The average level is marked at 5320.00 MHz with a level of 100.83 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>100.83</td> <td>-----</td> <td>-----</td> <td>88.28</td> <td>34.56</td> <td>9.90</td> <td>31.91</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>118 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	100.83	-----	-----	88.28	34.56	9.90	31.91							0.00	100								118 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5350.10	46.46	54.00	-7.54	33.97	34.50	9.91	31.92																																																																																											
						0.00	100																																																																																											
							118 AVERAGE																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5320.00	100.83	-----	-----	88.28	34.56	9.90	31.91																																																																																											
						0.00	100																																																																																											
							118 AVERAGE																																																																																											



Mode	15																																																																												
	Harmonic																																																																												
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																												
ANT	1																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>44.78</td> <td>74.00</td> <td>-29.22</td> <td>53.45</td> <td>37.90</td> <td>14.32</td> <td>60.89</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	44.78	74.00	-29.22	53.45	37.90	14.32	60.89	0.00	---	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>45.13</td> <td>74.00</td> <td>-28.87</td> <td>53.80</td> <td>37.90</td> <td>14.32</td> <td>60.89</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	45.13	74.00	-28.87	53.80	37.90	14.32	60.89	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10640.00	44.78	74.00	-29.22	53.45	37.90	14.32	60.89	0.00	---																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10640.00	45.13	74.00	-28.87	53.80	37.90	14.32	60.89	0.00	---																																																																				



Mode	16																																																																																															
	Band Edge																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal	Fundamental																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.10</td> <td>54.01</td> <td>74.00</td> <td>-19.99</td> <td>41.28</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>303</td> <td>91</td> <td>PEAK</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5468.05</td> <td>56.16</td> <td>68.20</td> <td>-12.04</td> <td>43.42</td> <td>34.70</td> <td>10.04</td> <td>32.00</td> <td>0.00</td> <td>303</td> <td>91</td> <td>PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.10	54.01	74.00	-19.99	41.28	34.70	10.02	31.99	0.00	303	91	PEAK	0.00	2	5468.05	56.16	68.20	-12.04	43.42	34.70	10.04	32.00	0.00	303	91	PEAK	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.69</td> <td>-----</td> <td>92.92</td> <td>34.70</td> <td>10.08</td> <td>32.01</td> <td>0.00</td> <td>305</td> <td>35</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	105.69	-----	92.92	34.70	10.08	32.01	0.00	305	35	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5454.10	54.01	74.00	-19.99	41.28	34.70	10.02	31.99	0.00	303	91	PEAK	0.00																																																																																			
2	5468.05	56.16	68.20	-12.04	43.42	34.70	10.04	32.00	0.00	303	91	PEAK	0.00																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	5500.00	105.69	-----	92.92	34.70	10.08	32.01	0.00	305	35	PEAK																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>43.63</td> <td>54.00</td> <td>-10.37</td> <td>30.90</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>305</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.00	43.63	54.00	-10.37	30.90	34.70	10.02	31.99	0.00	305	35	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.58</td> <td>-----</td> <td>84.00</td> <td>34.70</td> <td>10.09</td> <td>32.01</td> <td>0.00</td> <td>305</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	97.58	-----	84.00	34.70	10.09	32.01	0.00	305	35	AVERAGE																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	5458.00	43.63	54.00	-10.37	30.90	34.70	10.02	31.99	0.00	305	35	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	5500.00	97.58	-----	84.00	34.70	10.09	32.01	0.00	305	35	AVERAGE																																																																																					



Mode	16																																																																																															
	Band Edge																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																															
ANT	1																																																																																															
Pol.	Vertical	Fundamental																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5377.45</td> <td>53.22</td> <td>74.00</td> <td>-20.78</td> <td>40.62</td> <td>34.61</td> <td>9.93</td> <td>31.94</td> <td>0.00</td> <td>305</td> <td>35</td> <td>PEAK</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5469.40</td> <td>55.14</td> <td>68.20</td> <td>-13.06</td> <td>42.40</td> <td>34.70</td> <td>10.04</td> <td>32.00</td> <td>0.00</td> <td>305</td> <td>35</td> <td>PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5377.45	53.22	74.00	-20.78	40.62	34.61	9.93	31.94	0.00	305	35	PEAK	0.00	2	5469.40	55.14	68.20	-13.06	42.40	34.70	10.04	32.00	0.00	305	35	PEAK	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>106.98</td> <td>-----</td> <td>94.20</td> <td>34.70</td> <td>10.09</td> <td>32.01</td> <td>0.00</td> <td>303</td> <td>91</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	106.98	-----	94.20	34.70	10.09	32.01	0.00	303	91	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																							
1	5377.45	53.22	74.00	-20.78	40.62	34.61	9.93	31.94	0.00	305	35	PEAK	0.00																																																																																			
2	5469.40	55.14	68.20	-13.06	42.40	34.70	10.04	32.00	0.00	305	35	PEAK	0.00																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	5500.00	106.98	-----	94.20	34.70	10.09	32.01	0.00	303	91	PEAK																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.15</td> <td>43.98</td> <td>54.00</td> <td>-10.02</td> <td>31.25</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>303</td> <td>91</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.15	43.98	54.00	-10.02	31.25	34.70	10.02	31.99	0.00	303	91	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.95</td> <td>-----</td> <td>85.17</td> <td>34.70</td> <td>10.09</td> <td>32.01</td> <td>0.00</td> <td>303</td> <td>91</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	97.95	-----	85.17	34.70	10.09	32.01	0.00	303	91	AVERAGE																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	5458.15	43.98	54.00	-10.02	31.25	34.70	10.02	31.99	0.00	303	91	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	5500.00	97.95	-----	85.17	34.70	10.09	32.01	0.00	303	91	AVERAGE																																																																																					



Mode	16																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>45.66</td> <td>74.00</td> <td>-28.34</td> <td>53.98</td> <td>38.00</td> <td>14.56</td> <td>60.88</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	45.66	74.00	-28.34	53.98	38.00	14.56	60.88	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>45.31</td> <td>74.00</td> <td>-28.69</td> <td>53.63</td> <td>38.00</td> <td>14.56</td> <td>60.88</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	45.31	74.00	-28.69	53.63	38.00	14.56	60.88	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11000.00	45.66	74.00	-28.34	53.98	38.00	14.56	60.88	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11000.00	45.31	74.00	-28.69	53.63	38.00	14.56	60.88	0.00	---	---	PEAK																																																																						



Mode	17																																																																												
	Harmonic																																																																												
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																												
ANT	1																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.53</td> <td>74.00</td> <td>-28.47</td> <td>53.66</td> <td>38.06</td> <td>14.68</td> <td>60.87</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	45.53	74.00	-28.47	53.66	38.06	14.68	60.87	0.00	---	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.59</td> <td>74.00</td> <td>-28.41</td> <td>53.72</td> <td>38.06</td> <td>14.68</td> <td>60.87</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	45.59	74.00	-28.41	53.72	38.06	14.68	60.87	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 11160.00	45.53	74.00	-28.47	53.66	38.06	14.68	60.87	0.00	---																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 11160.00	45.59	74.00	-28.41	53.72	38.06	14.68	60.87	0.00	---																																																																				



Mode	18																																																																																																													
	Band Edge																																																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5725.03</td> <td>58.72</td> <td>68.20</td> <td>-9.48</td> <td>45.76</td> <td>34.65</td> <td>10.34</td> <td>32.03</td> <td>0.00</td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>90 PEAK</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5725.03	58.72	68.20	-9.48	45.76	34.65	10.34	32.03	0.00	300										90 PEAK										0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>105.17</td> <td>-----</td> <td>-----</td> <td>92.20</td> <td>34.69</td> <td>10.33</td> <td>32.05</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	105.17	-----	-----	92.20	34.69	10.33	32.05																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																					
1 5725.03	58.72	68.20	-9.48	45.76	34.65	10.34	32.03	0.00	300																																																																																																					
									90 PEAK																																																																																																					
									0.00																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1 5700.00	105.17	-----	-----	92.20	34.69	10.33	32.05																																																																																																							
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.92</td> <td>-----</td> <td>-----</td> <td>83.95</td> <td>34.69</td> <td>10.33</td> <td>32.05</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	96.92	-----	-----	83.95	34.69	10.33	32.05																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1 5700.00	96.92	-----	-----	83.95	34.69	10.33	32.05																																																																																																							



Mode	18																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.00</td> <td>59.05</td> <td>68.20</td> <td>-9.15</td> <td>46.08</td> <td>34.65</td> <td>10.35</td> <td>32.03</td> <td>0.00</td> <td>283</td> <td>360</td> <td>PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5726.00	59.05	68.20	-9.15	46.08	34.65	10.35	32.03	0.00	283	360	PEAK	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>107.15</td> <td>-----</td> <td>94.18</td> <td>34.69</td> <td>10.33</td> <td>32.05</td> <td>0.00</td> <td>300</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	107.15	-----	94.18	34.69	10.33	32.05	0.00	300	90	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																											
1	5726.00	59.05	68.20	-9.15	46.08	34.65	10.35	32.03	0.00	283	360	PEAK	0.00																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																												
1	5700.00	107.15	-----	94.18	34.69	10.33	32.05	0.00	300	90	PEAK																																																																									
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.53</td> <td>-----</td> <td>83.56</td> <td>34.69</td> <td>10.33</td> <td>32.05</td> <td>0.00</td> <td>300</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	96.53	-----	83.56	34.69	10.33	32.05	0.00	300	90	AVERAGE																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																												
1	5700.00	96.53	-----	83.56	34.69	10.33	32.05	0.00	300	90	AVERAGE																																																																									



Mode	18																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>45.97</td> <td>74.00</td> <td>-28.03</td> <td>53.78</td> <td>38.20</td> <td>14.85</td> <td>60.86</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	45.97	74.00	-28.03	53.78	38.20	14.85	60.86	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>45.57</td> <td>74.00</td> <td>-28.43</td> <td>53.38</td> <td>38.20</td> <td>14.85</td> <td>60.86</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	45.57	74.00	-28.43	53.38	38.20	14.85	60.86	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11400.00	45.97	74.00	-28.03	53.78	38.20	14.85	60.86	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11400.00	45.57	74.00	-28.43	53.38	38.20	14.85	60.86	0.00	---	---	PEAK																																																																						



Mode	19																																																																	
	Band Edge - L																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5147.70 55.90 74.00 -18.10</td> <td>43.72</td> <td>34.20</td> <td>9.78</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>67 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5147.70 55.90 74.00 -18.10	43.72	34.20	9.78	31.00	0.00	100	67 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00 98.64 -----</td> <td>86.32</td> <td>34.33</td> <td>9.81</td> <td>31.82</td> <td>0.00</td> <td>100</td> <td>67 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5190.00 98.64 -----	86.32	34.33	9.81	31.82	0.00	100	67 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5147.70 55.90 74.00 -18.10	43.72	34.20	9.78	31.00	0.00	100	67 PEAK																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5190.00 98.64 -----	86.32	34.33	9.81	31.82	0.00	100	67 PEAK																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5149.30 46.70 54.00 -7.30</td> <td>34.51</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>100</td> <td>67 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5149.30 46.70 54.00 -7.30	34.51	34.20	9.79	31.00	0.00	100	67 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00 91.21 -----</td> <td>78.87</td> <td>34.35</td> <td>9.82</td> <td>31.83</td> <td>0.00</td> <td>100</td> <td>67 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5190.00 91.21 -----	78.87	34.35	9.82	31.83	0.00	100	67 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5149.30 46.70 54.00 -7.30	34.51	34.20	9.79	31.00	0.00	100	67 AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5190.00 91.21 -----	78.87	34.35	9.82	31.83	0.00	100	67 AVERAGE																																																											



Mode	19																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																												
ANT	1																																												
Pol.	Horizontal	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5430.03</td> <td>53.52</td> <td>74.00</td> <td>-20.48</td> <td>40.81</td> <td>34.70</td> <td>9.98</td> <td>31.97</td> <td>0.00</td> <td>100</td> <td>67</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5430.03	53.52	74.00	-20.48	40.81	34.70	9.98	31.97	0.00	100	67	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5430.03	53.52	74.00	-20.48	40.81	34.70	9.98	31.97	0.00	100	67	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5452.98</td> <td>42.93</td> <td>54.00</td> <td>-11.07</td> <td>30.20</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>67</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5452.98	42.93	54.00	-11.07	30.20	34.70	10.02	31.99	0.00	100	67	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5452.98	42.93	54.00	-11.07	30.20	34.70	10.02	31.99	0.00	100	67	AVERAGE																																		



Mode	19																																																																											
	Band Edge - L																																																																											
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																											
ANT	1																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.70</td> <td>58.78</td> <td>74.00</td> <td>-15.22</td> <td>46.59</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>113</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.70	58.78	74.00	-15.22	46.59	34.20	9.79	31.00	0.00	113	118	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>102.65</td> <td>-----</td> <td>-----</td> <td>90.31</td> <td>34.35</td> <td>9.82</td> <td>31.83</td> <td>0.00</td> <td>113</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	102.65	-----	-----	90.31	34.35	9.82	31.83	0.00	113	118	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.70	58.78	74.00	-15.22	46.59	34.20	9.79	31.00	0.00	113	118	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5190.00	102.65	-----	-----	90.31	34.35	9.82	31.83	0.00	113	118	PEAK																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>48.94</td> <td>54.00</td> <td>-5.06</td> <td>36.75</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>113</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5150.00	48.94	54.00	-5.06	36.75	34.20	9.79	31.00	0.00	113	118	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>94.31</td> <td>-----</td> <td>-----</td> <td>81.93</td> <td>34.38</td> <td>9.83</td> <td>31.83</td> <td>0.00</td> <td>113</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	94.31	-----	-----	81.93	34.38	9.83	31.83	0.00	113	118	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5150.00	48.94	54.00	-5.06	36.75	34.20	9.79	31.00	0.00	113	118	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5190.00	94.31	-----	-----	81.93	34.38	9.83	31.83	0.00	113	118	AVERAGE																																																																



Mode	19																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																												
ANT	1																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5428.14</td> <td>52.97</td> <td>74.00</td> <td>-21.03</td> <td>40.26</td> <td>34.70</td> <td>9.98</td> <td>31.97</td> <td>0.00</td> <td>113</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5428.14	52.97	74.00	-21.03	40.26	34.70	9.98	31.97	0.00	113	118	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5428.14	52.97	74.00	-21.03	40.26	34.70	9.98	31.97	0.00	113	118	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.03</td> <td>43.25</td> <td>54.00</td> <td>-10.75</td> <td>30.52</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>113</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5457.03	43.25	54.00	-10.75	30.52	34.70	10.02	31.99	0.00	113	118	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5457.03	43.25	54.00	-10.75	30.52	34.70	10.02	31.99	0.00	113	118	AVERAGE																																		



Mode	19																																																																																		
	Harmonic																																																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>43.62</td> <td>68.20</td> <td>-24.58</td> <td>52.90</td> <td>37.48</td> <td>14.14</td> <td>60.90</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10380.00	43.62	68.20	-24.58	52.90	37.48	14.14	60.90	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>43.93</td> <td>68.20</td> <td>-24.27</td> <td>53.21</td> <td>37.48</td> <td>14.14</td> <td>60.90</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10380.00	43.93	68.20	-24.27	53.21	37.48	14.14	60.90	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 10380.00	43.62	68.20	-24.58	52.90	37.48	14.14	60.90	0.00	---	---	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 10380.00	43.93	68.20	-24.27	53.21	37.48	14.14	60.90	0.00	---	---	PEAK																																																																								



Mode	20																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10460.00</td> <td>44.37</td> <td>68.20</td> <td>-23.83</td> <td>53.44</td> <td>37.62</td> <td>14.20</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10460.00	44.37	68.20	-23.83	53.44	37.62	14.20	60.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10460.00</td> <td>44.13</td> <td>68.20</td> <td>-24.07</td> <td>53.20</td> <td>37.62</td> <td>14.20</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10460.00	44.13	68.20	-24.07	53.20	37.62	14.20	60.89	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10460.00	44.37	68.20	-23.83	53.44	37.62	14.20	60.89	0.00	---	---	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10460.00	44.13	68.20	-24.07	53.20	37.62	14.20	60.89	0.00	---	---	PEAK																																																																							



Mode	21																																																																																	
	Harmonic																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10540.00</td> <td>43.88</td> <td>68.20</td> <td>-24.32</td> <td>52.74</td> <td>37.78</td> <td>14.25</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10540.00	43.88	68.20	-24.32	52.74	37.78	14.25	60.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10540.00</td> <td>44.24</td> <td>68.20</td> <td>-23.96</td> <td>53.10</td> <td>37.78</td> <td>14.25</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10540.00	44.24	68.20	-23.96	53.10	37.78	14.25	60.89	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10540.00	43.88	68.20	-24.32	52.74	37.78	14.25	60.89	0.00	---	---	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10540.00	44.24	68.20	-23.96	53.10	37.78	14.25	60.89	0.00	---	---	PEAK																																																																							



Mode	22																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5018.60</td> <td>54.12</td> <td>74.00</td> <td>-19.88</td> <td>42.04</td> <td>34.14</td> <td>9.67</td> <td>31.73</td> <td>0.00</td> <td>107</td> <td>73 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5018.60	54.12	74.00	-19.88	42.04	34.14	9.67	31.73	0.00	107	73 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>100.73</td> <td>-----</td> <td>-----</td> <td>88.18</td> <td>34.56</td> <td>9.90</td> <td>31.91</td> <td>0.00</td> <td>107</td> <td>73 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	100.73	-----	-----	88.18	34.56	9.90	31.91	0.00	107	73 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5018.60	54.12	74.00	-19.88	42.04	34.14	9.67	31.73	0.00	107	73 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5310.00	100.73	-----	-----	88.18	34.56	9.90	31.91	0.00	107	73 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5113.77</td> <td>43.51</td> <td>54.00</td> <td>-10.49</td> <td>31.34</td> <td>34.20</td> <td>9.75</td> <td>31.78</td> <td>0.00</td> <td>107</td> <td>73 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5113.77	43.51	54.00	-10.49	31.34	34.20	9.75	31.78	0.00	107	73 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>93.02</td> <td>-----</td> <td>-----</td> <td>80.46</td> <td>34.57</td> <td>9.89</td> <td>31.90</td> <td>0.00</td> <td>107</td> <td>73 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	93.02	-----	-----	80.46	34.57	9.89	31.90	0.00	107	73 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5113.77	43.51	54.00	-10.49	31.34	34.20	9.75	31.78	0.00	107	73 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5310.00	93.02	-----	-----	80.46	34.57	9.89	31.90	0.00	107	73 AVERAGE																																																																						



Mode	22																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.90</td> <td>59.22</td> <td>74.00</td> <td>-14.78</td> <td>46.73</td> <td>34.51</td> <td>9.91</td> <td>31.93</td> <td>0.00</td> <td>107</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5352.90	59.22	74.00	-14.78	46.73	34.51	9.91	31.93	0.00	107	73	PEAK	Blank	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																			
1	5352.90	59.22	74.00	-14.78	46.73	34.51	9.91	31.93	0.00	107	73	PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.20</td> <td>48.97</td> <td>54.00</td> <td>-5.03</td> <td>36.48</td> <td>34.50</td> <td>9.91</td> <td>31.92</td> <td>0.00</td> <td>107</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5350.20	48.97	54.00	-5.03	36.48	34.50	9.91	31.92	0.00	107	73	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																			
1	5350.20	48.97	54.00	-5.03	36.48	34.50	9.91	31.92	0.00	107	73	AVERAGE																															



		22																																																																										
Mode		Band Edge - L																																																																										
		U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																										
ANT		1																																																																										
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5124.31</td> <td>54.02</td> <td>74.00</td> <td>-19.98</td> <td>41.85</td> <td>34.20</td> <td>9.76</td> <td>31.79</td> <td>0.00</td> <td>100</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5124.31	54.02	74.00	-19.98	41.85	34.20	9.76	31.79	0.00	100	82	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>101.48</td> <td>-----</td> <td>-----</td> <td>88.91</td> <td>34.58</td> <td>9.89</td> <td>31.90</td> <td>0.00</td> <td>100</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	101.48	-----	-----	88.91	34.58	9.89	31.90	0.00	100	82	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5124.31	54.02	74.00	-19.98	41.85	34.20	9.76	31.79	0.00	100	82	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5310.00	101.48	-----	-----	88.91	34.58	9.89	31.90	0.00	100	82	PEAK																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5081.22</td> <td>43.56</td> <td>54.00</td> <td>-10.44</td> <td>31.39</td> <td>34.20</td> <td>9.73</td> <td>31.76</td> <td>0.00</td> <td>100</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5081.22	43.56	54.00	-10.44	31.39	34.20	9.73	31.76	0.00	100	82	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>92.63</td> <td>-----</td> <td>-----</td> <td>80.07</td> <td>34.57</td> <td>9.89</td> <td>31.90</td> <td>0.00</td> <td>100</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	92.63	-----	-----	80.07	34.57	9.89	31.90	0.00	100	82	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5081.22	43.56	54.00	-10.44	31.39	34.20	9.73	31.76	0.00	100	82	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5310.00	92.63	-----	-----	80.07	34.57	9.89	31.90	0.00	100	82	AVERAGE																																																																



Mode	22																																											
	Band Edge - R																																											
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																											
ANT	1																																											
Pol.	Vertical	Fundamental																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5351.10</td> <td>58.80</td> <td>74.00</td> <td>-15.20</td> <td>46.31</td> <td>34.50</td> <td>9.91</td> <td>31.92</td> <td>0.00</td> <td>100</td> <td>82 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5351.10	58.80	74.00	-15.20	46.31	34.50	9.91	31.92	0.00	100	82 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 5351.10	58.80	74.00	-15.20	46.31	34.50	9.91	31.92	0.00	100	82 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.20</td> <td>48.14</td> <td>54.00</td> <td>-5.86</td> <td>35.65</td> <td>34.50</td> <td>9.91</td> <td>31.92</td> <td>0.00</td> <td>100</td> <td>82 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5350.20	48.14	54.00	-5.86	35.65	34.50	9.91	31.92	0.00	100	82 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 5350.20	48.14	54.00	-5.86	35.65	34.50	9.91	31.92	0.00	100	82 AVERAGE																																		



Mode	22																																																																																			
	Harmonic																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>43.73</td> <td>74.00</td> <td>-30.27</td> <td>52.41</td> <td>37.90</td> <td>14.31</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10620.00	43.73	74.00	-30.27	52.41	37.90	14.31	60.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>43.87</td> <td>74.00</td> <td>-30.13</td> <td>52.55</td> <td>37.90</td> <td>14.31</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10620.00	43.87	74.00	-30.13	52.55	37.90	14.31	60.89	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	10620.00	43.73	74.00	-30.27	52.41	37.90	14.31	60.89	0.00	---	---	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	10620.00	43.87	74.00	-30.13	52.55	37.90	14.31	60.89	0.00	---	---	PEAK																																																																								

Note: Only the worst case has assessed 18G ~40GHz to test.







Mode	23																																																																																		
	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>55.90</td> <td>74.00</td> <td>-18.10</td> <td>43.16</td> <td>34.70</td> <td>10.03</td> <td>31.99</td> <td>0.00</td> <td>227</td> <td>30</td> <td>PEAK</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>63.16</td> <td>68.20</td> <td>-5.04</td> <td>50.42</td> <td>34.70</td> <td>10.04</td> <td>32.00</td> <td>0.00</td> <td>227</td> <td>30</td> <td>PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	dB	1	5459.44	55.90	74.00	-18.10	43.16	34.70	10.03	31.99	0.00	227	30	PEAK	0.00	2	5470.00	63.16	68.20	-5.04	50.42	34.70	10.04	32.00	0.00	227	30	PEAK	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>101.52</td> <td>-----</td> <td>88.75</td> <td>34.69</td> <td>10.10</td> <td>32.02</td> <td>0.00</td> <td>227</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5510.00	101.52	-----	88.75	34.69	10.10	32.02	0.00	227	30	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	dB																																																																									
1	5459.44	55.90	74.00	-18.10	43.16	34.70	10.03	31.99	0.00	227	30	PEAK	0.00																																																																						
2	5470.00	63.16	68.20	-5.04	50.42	34.70	10.04	32.00	0.00	227	30	PEAK	0.00																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																								
1	5510.00	101.52	-----	88.75	34.69	10.10	32.02	0.00	227	30	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>46.95</td> <td>54.00</td> <td>-7.05</td> <td>34.21</td> <td>34.70</td> <td>10.03</td> <td>31.99</td> <td>0.00</td> <td>227</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5459.76	46.95	54.00	-7.05	34.21	34.70	10.03	31.99	0.00	227	30	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.94</td> <td>-----</td> <td>80.17</td> <td>34.69</td> <td>10.10</td> <td>32.02</td> <td>0.00</td> <td>227</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5510.00	92.94	-----	80.17	34.69	10.10	32.02	0.00	227	30	AVERAGE																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																								
1	5459.76	46.95	54.00	-7.05	34.21	34.70	10.03	31.99	0.00	227	30	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																								
1	5510.00	92.94	-----	80.17	34.69	10.10	32.02	0.00	227	30	AVERAGE																																																																								



Mode	23																																															
	Band Edge - R																																															
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																															
ANT	1																																															
Pol.	Horizontal	Fundamental																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5728.03</td> <td>54.52</td> <td>68.20</td> <td>-13.68</td> <td>41.56</td> <td>34.64</td> <td>10.35</td> <td>32.03</td> <td>0.00</td> <td>227</td> <td>30 PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	dB	1	5728.03	54.52	68.20	-13.68	41.56	34.64	10.35	32.03	0.00	227	30 PEAK	0.00	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	dB																																					
1	5728.03	54.52	68.20	-13.68	41.56	34.64	10.35	32.03	0.00	227	30 PEAK	0.00																																				

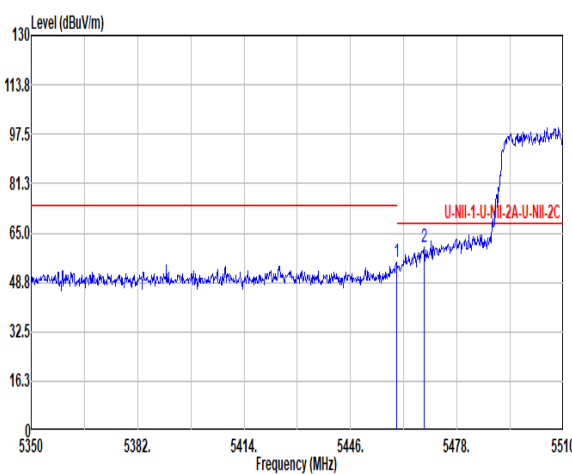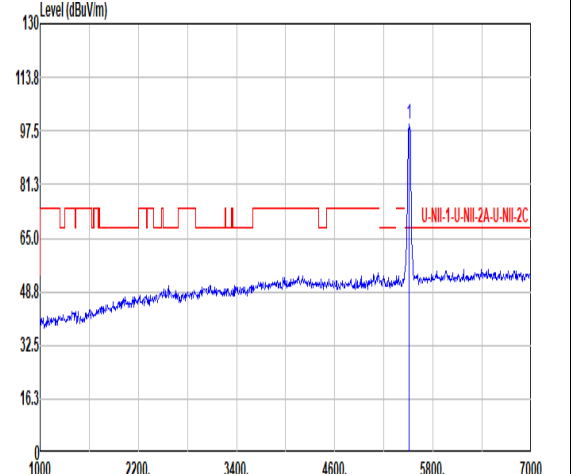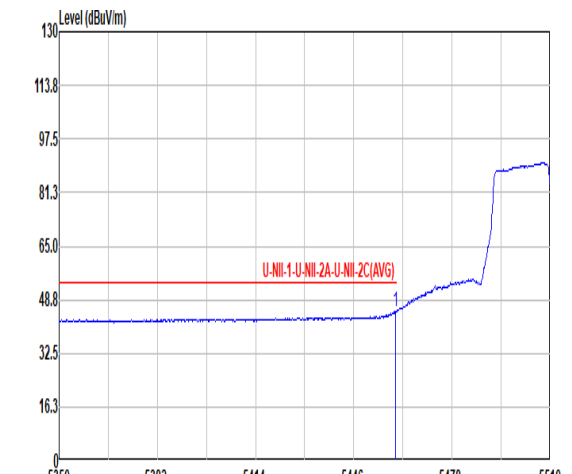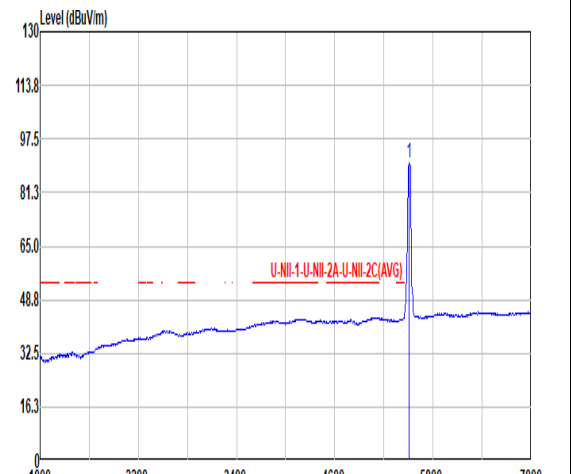

Mode	23																																																																																		
	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																		
ANT	1																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>55.42</td> <td>74.00</td> <td>-18.58</td> <td>42.68</td> <td>34.70</td> <td>10.03</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>77 PEAK</td> </tr> <tr> <td>2</td> <td>5468.08</td> <td>60.20</td> <td>68.20</td> <td>-8.00</td> <td>47.46</td> <td>34.70</td> <td>10.04</td> <td>32.00</td> <td>0.00</td> <td>100</td> <td>77 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5459.76	55.42	74.00	-18.58	42.68	34.70	10.03	31.99	0.00	100	77 PEAK	2	5468.08	60.20	68.20	-8.00	47.46	34.70	10.04	32.00	0.00	100	77 PEAK	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>99.68</td> <td>-----</td> <td>86.91</td> <td>34.69</td> <td>10.10</td> <td>32.02</td> <td>0.00</td> <td>100</td> <td>77 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	99.68	-----	86.91	34.69	10.10	32.02	0.00	100	77 PEAK
	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	5459.76	55.42	74.00	-18.58	42.68	34.70	10.03	31.99	0.00	100	77 PEAK																																																																								
2	5468.08	60.20	68.20	-8.00	47.46	34.70	10.04	32.00	0.00	100	77 PEAK																																																																								
Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5510.00	99.68	-----	86.91	34.69	10.10	32.02	0.00	100	77 PEAK																																																																									
Avg	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>45.26</td> <td>54.00</td> <td>-8.74</td> <td>32.52</td> <td>34.70</td> <td>10.03</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>77 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	45.26	54.00	-8.74	32.52	34.70	10.03	31.99	0.00	100	77 AVERAGE	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>90.11</td> <td>-----</td> <td>77.34</td> <td>34.68</td> <td>10.11</td> <td>32.02</td> <td>0.00</td> <td>100</td> <td>77 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	90.11	-----	77.34	34.68	10.11	32.02	0.00	100	77 AVERAGE														
	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5459.60	45.26	54.00	-8.74	32.52	34.70	10.03	31.99	0.00	100	77 AVERAGE																																																																								
Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5510.00	90.11	-----	77.34	34.68	10.11	32.02	0.00	100	77 AVERAGE																																																																									





Mode	23																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																												
ANT	1																																												
Pol.	Vertical	Fundamental																																											
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5750.47</td> <td>54.33</td> <td>68.20</td> <td>-13.87</td> <td>41.37</td> <td>34.60</td> <td>10.37</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>77 PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	dB	1 5750.47	54.33	68.20	-13.87	41.37	34.60	10.37	32.01	0.00	100	77 PEAK	0.00	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																				
Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	dB																																			
1 5750.47	54.33	68.20	-13.87	41.37	34.60	10.37	32.01	0.00	100	77 PEAK	0.00																																		



Mode	23																																																																													
	Harmonic																																																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak																																																																														
Avg																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>43.17</td> <td>74.00</td> <td>-30.83</td> <td>51.47</td> <td>38.00</td> <td>14.58</td> <td>60.88</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	43.17	74.00	-30.83	51.47	38.00	14.58	60.88	0.00	---	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>43.34</td> <td>74.00</td> <td>-30.66</td> <td>51.64</td> <td>38.00</td> <td>14.58</td> <td>60.88</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	43.34	74.00	-30.66	51.64	38.00	14.58	60.88	0.00	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11020.00	43.17	74.00	-30.83	51.47	38.00	14.58	60.88	0.00	---																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11020.00	43.34	74.00	-30.66	51.64	38.00	14.58	60.88	0.00	---																																																																					

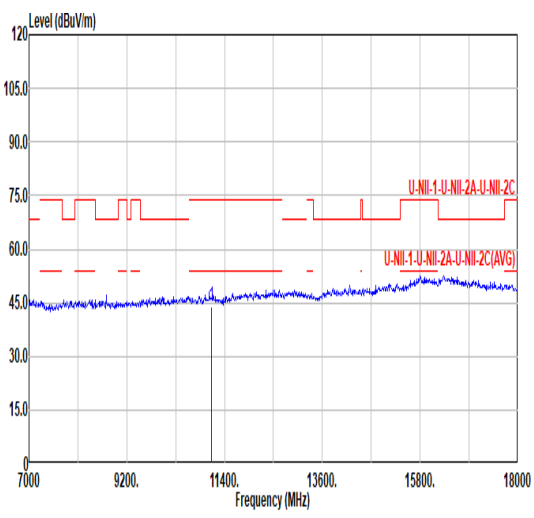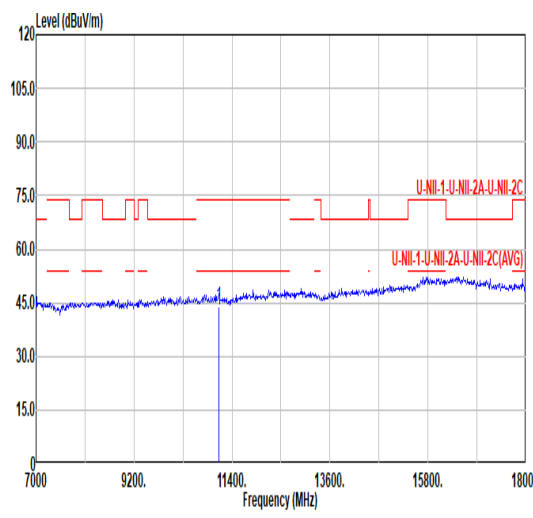

Mode	24																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak																																																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>43.93</td> <td>74.00</td> <td>-30.07</td> <td>52.17</td> <td>38.00</td> <td>14.63</td> <td>60.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11100.00	43.93	74.00	-30.07	52.17	38.00	14.63	60.87	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>43.71</td> <td>74.00</td> <td>-30.29</td> <td>51.95</td> <td>38.00</td> <td>14.63</td> <td>60.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11100.00	43.71	74.00	-30.29	51.95	38.00	14.63	60.87	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11100.00	43.93	74.00	-30.07	52.17	38.00	14.63	60.87	0.00	---	---	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11100.00	43.71	74.00	-30.29	51.95	38.00	14.63	60.87	0.00	---	---	PEAK																																																																							







Mode	25																																																											
	Band Edge - L																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																											
ANT	1																																																											
Pol.	Horizontal	Fundamental																																																										
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Over (dBuV/m)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Aux6 Factor (dB)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.52</td> <td>52.99</td> <td>74.00</td> <td>-21.01</td> <td>40.26</td> <td>34.70</td> <td>10.01</td> <td>31.98</td> <td>0.00</td> <td>277</td> <td>12 PEAK</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>52.81</td> <td>68.20</td> <td>-15.39</td> <td>40.07</td> <td>34.70</td> <td>10.04</td> <td>32.00</td> <td>0.00</td> <td>277</td> <td>12 PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Limit (dBuV/m)	Over (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Aux6 Factor (dB)	1	5449.52	52.99	74.00	-21.01	40.26	34.70	10.01	31.98	0.00	277	12 PEAK	0.00	2	5468.72	52.81	68.20	-15.39	40.07	34.70	10.04	32.00	0.00	277	12 PEAK	0.00	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>106.93</td> <td>94.05</td> <td>34.65</td> <td>10.30</td> <td>32.07</td> <td>0.00</td> <td>277</td> <td>12 PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	1	5670.00	106.93	94.05	34.65	10.30	32.07	0.00	277	12 PEAK
	Peak	Freq (MHz)	Limit (dBuV/m)	Over (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Aux6 Factor (dB)																																																
1	5449.52	52.99	74.00	-21.01	40.26	34.70	10.01	31.98	0.00	277	12 PEAK	0.00																																																
2	5468.72	52.81	68.20	-15.39	40.07	34.70	10.04	32.00	0.00	277	12 PEAK	0.00																																																
Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)																																																			
1	5670.00	106.93	94.05	34.65	10.30	32.07	0.00	277	12 PEAK																																																			
Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.84</td> <td>43.09</td> <td>54.00</td> <td>-10.91</td> <td>30.36</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>277</td> <td>12 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	1	5457.84	43.09	54.00	-10.91	30.36	34.70	10.02	31.99	0.00	277	12 AVERAGE	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>97.99</td> <td>85.11</td> <td>34.65</td> <td>10.30</td> <td>32.07</td> <td>0.00</td> <td>277</td> <td>12 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	1	5670.00	97.99	85.11	34.65	10.30	32.07	0.00	277	12 AVERAGE																
Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)																																																			
1	5457.84	43.09	54.00	-10.91	30.36	34.70	10.02	31.99	0.00	277	12 AVERAGE																																																	
Peak	Freq (MHz)	Limit (dBuV/m)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)																																																			
1	5670.00	97.99	85.11	34.65	10.30	32.07	0.00	277	12 AVERAGE																																																			



Mode	25																																																
	Band Edge - R																																																
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																
ANT	1																																																
Pol.	Horizontal	Fundamental																																															
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p>	Blank																																															
<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.95</td> <td>57.07</td> <td>68.20</td> <td>-11.13</td> <td>44.11</td> <td>34.64</td> <td>10.35</td> <td>32.03</td> <td>0.00</td> <td>277</td> <td>12 PEAK</td> <td>0.00</td> </tr> </tbody> </table>				Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB	1	5727.95	57.07	68.20	-11.13	44.11	34.64	10.35	32.03	0.00	277	12 PEAK	0.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	Factor																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB																																						
1	5727.95	57.07	68.20	-11.13	44.11	34.64	10.35	32.03	0.00	277	12 PEAK	0.00																																					

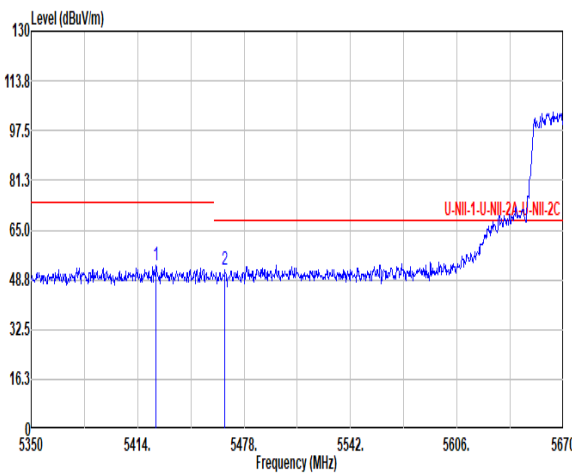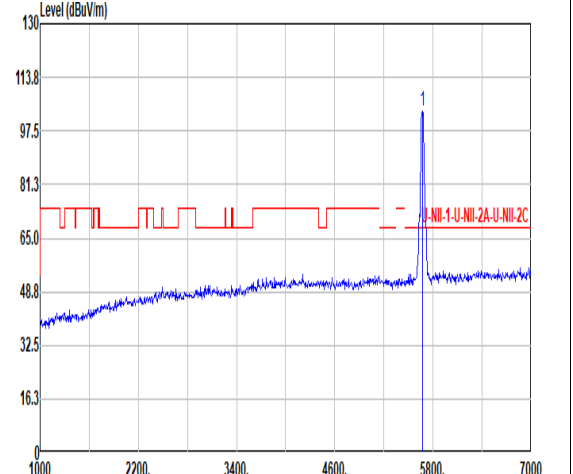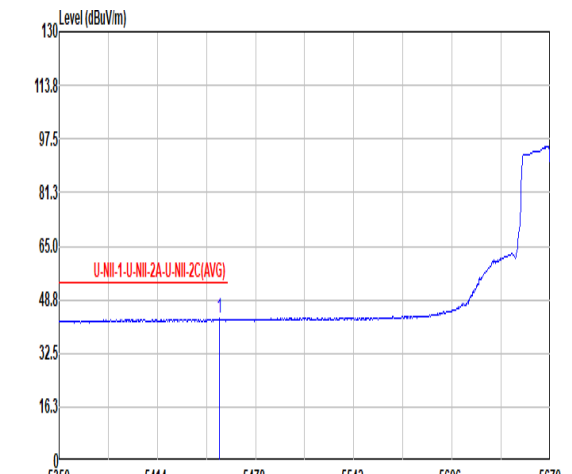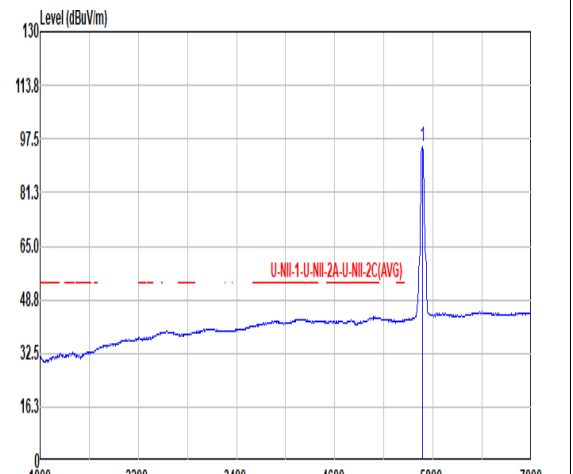

Mode	25																																																																																						
	Band Edge - L																																																																																						
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																						
ANT	1																																																																																						
Pol.	Vertical	Fundamental																																																																																					
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> <th>Aux6</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5425.20</td> <td>53.26</td> <td>74.00</td> <td>-20.74</td> <td>40.56</td> <td>34.70</td> <td>9.97</td> <td>31.97</td> <td>0.00</td> <td>142</td> <td>94 PEAK</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5466.48</td> <td>51.86</td> <td>68.20</td> <td>-16.34</td> <td>39.11</td> <td>34.70</td> <td>10.04</td> <td>31.99</td> <td>0.00</td> <td>142</td> <td>94 PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Aux6		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		dB	1	5425.20	53.26	74.00	-20.74	40.56	34.70	9.97	31.97	0.00	142	94 PEAK	0.00	2	5466.48	51.86	68.20	-16.34	39.11	34.70	10.04	31.99	0.00	142	94 PEAK	0.00	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>103.66</td> <td>90.78</td> <td>34.65</td> <td>10.30</td> <td>32.07</td> <td>0.00</td> <td>142</td> <td>94</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	103.66	90.78	34.65	10.30	32.07	0.00	142	94	PEAK
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Aux6																																																																											
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		dB																																																																											
1	5425.20	53.26	74.00	-20.74	40.56	34.70	9.97	31.97	0.00	142	94 PEAK	0.00																																																																											
2	5466.48	51.86	68.20	-16.34	39.11	34.70	10.04	31.99	0.00	142	94 PEAK	0.00																																																																											
Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5670.00	103.66	90.78	34.65	10.30	32.07	0.00	142	94	PEAK																																																																													
Avg	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.64</td> <td>42.96</td> <td>54.00</td> <td>-11.04</td> <td>30.23</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>142</td> <td>94 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5454.64	42.96	54.00	-11.04	30.23	34.70	10.02	31.99	0.00	142	94 AVERAGE	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>95.23</td> <td>82.35</td> <td>34.65</td> <td>10.30</td> <td>32.07</td> <td>0.00</td> <td>142</td> <td>94</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	95.23	82.35	34.65	10.30	32.07	0.00	142	94	AVERAGE																		
Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5454.64	42.96	54.00	-11.04	30.23	34.70	10.02	31.99	0.00	142	94 AVERAGE																																																																												
Peak	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5670.00	95.23	82.35	34.65	10.30	32.07	0.00	142	94	AVERAGE																																																																													







Mode	25																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																														
ANT	1																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Aux6</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.06</td> <td>55.10</td> <td>68.20</td> <td>-13.10</td> <td>42.14</td> <td>34.64</td> <td>10.35</td> <td>32.03</td> <td>0.00</td> <td>142</td> <td>94</td> <td>PEAK</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB	1	5727.06	55.10	68.20	-13.10	42.14	34.64	10.35	32.03	0.00	142	94	PEAK	0.00	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Aux6																																						
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB																																					
1	5727.06	55.10	68.20	-13.10	42.14	34.64	10.35	32.03	0.00	142	94	PEAK	0.00																																		



Mode	25																																																																													
	Harmonic																																																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak																																																																														
Avg																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11340.00</td> <td>43.76</td> <td>74.00</td> <td>-30.24</td> <td>51.69</td> <td>38.14</td> <td>14.80</td> <td>60.87</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11340.00	43.76	74.00	-30.24	51.69	38.14	14.80	60.87	0.00	---	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11340.00</td> <td>44.11</td> <td>74.00</td> <td>-29.89</td> <td>52.04</td> <td>38.14</td> <td>14.80</td> <td>60.87</td> <td>0.00</td> <td>---</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11340.00	44.11	74.00	-29.89	52.04	38.14	14.80	60.87	0.00	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11340.00	43.76	74.00	-30.24	51.69	38.14	14.80	60.87	0.00	---																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11340.00	44.11	74.00	-29.89	52.04	38.14	14.80	60.87	0.00	---																																																																					

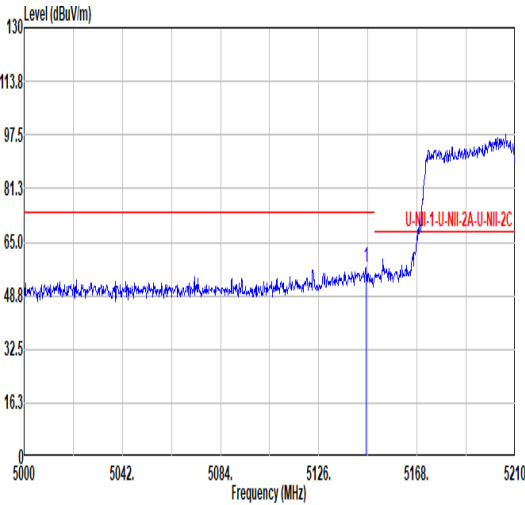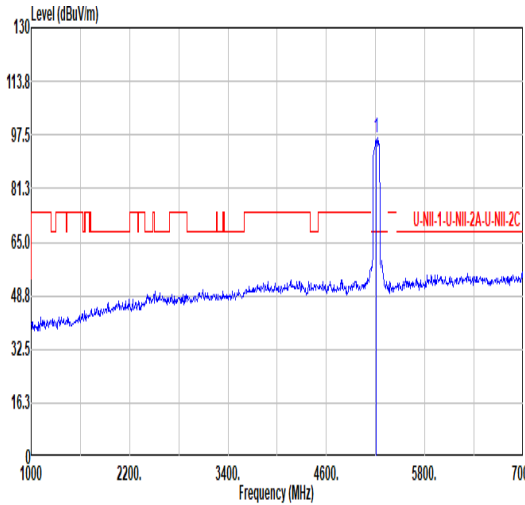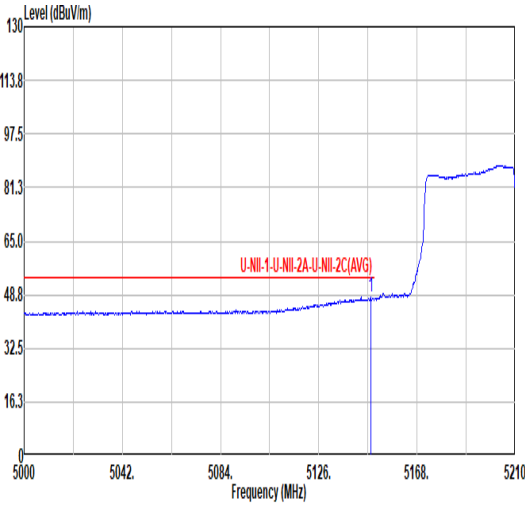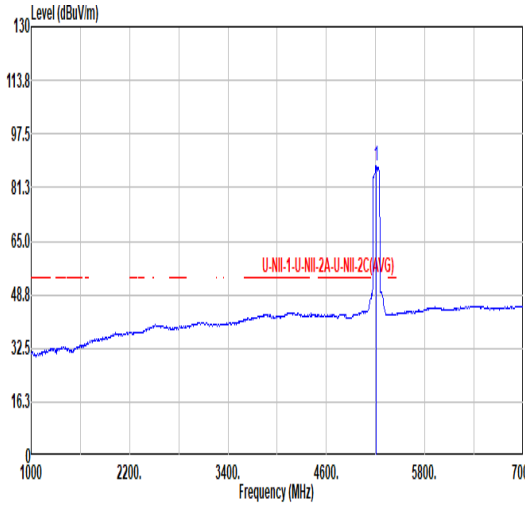

Mode	26																																																																													
	Band Edge - L																																																																													
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 <table border="1" data-bbox="268 1131 794 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.37</td> <td>57.26</td> <td>74.00</td> <td>-16.74</td> <td>45.08</td> <td>34.20</td> <td>9.78</td> <td>31.00</td> <td>0.00</td> <td>107</td> <td>64 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.37	57.26	74.00	-16.74	45.08	34.20	9.78	31.00	0.00	107	64 PEAK	 <table border="1" data-bbox="906 1131 1433 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>96.57</td> <td>-----</td> <td>-----</td> <td>84.17</td> <td>34.40</td> <td>9.85</td> <td>31.85</td> <td>0.00</td> <td>107</td> <td>64 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	96.57	-----	-----	84.17	34.40	9.85	31.85	0.00	107	64 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5146.37	57.26	74.00	-16.74	45.08	34.20	9.78	31.00	0.00	107	64 PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5210.00	96.57	-----	-----	84.17	34.40	9.85	31.85	0.00	107	64 PEAK																																																																			
Avg	 <table border="1" data-bbox="268 1812 794 1935"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.26</td> <td>48.02</td> <td>54.00</td> <td>-5.98</td> <td>35.83</td> <td>34.20</td> <td>9.79</td> <td>31.00</td> <td>0.00</td> <td>107</td> <td>64 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.26	48.02	54.00	-5.98	35.83	34.20	9.79	31.00	0.00	107	64 AVERAGE	 <table border="1" data-bbox="906 1812 1433 1935"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>87.78</td> <td>-----</td> <td>-----</td> <td>75.38</td> <td>34.40</td> <td>9.83</td> <td>31.83</td> <td>0.00</td> <td>107</td> <td>64 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	87.78	-----	-----	75.38	34.40	9.83	31.83	0.00	107	64 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5148.26	48.02	54.00	-5.98	35.83	34.20	9.79	31.00	0.00	107	64 AVERAGE																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5210.00	87.78	-----	-----	75.38	34.40	9.83	31.83	0.00	107	64 AVERAGE																																																																			



Mode	26																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																	
ANT	1																																																	
Pol.	Horizontal	Fundamental																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5411.50</td> <td>53.42</td> <td>74.00</td> <td>-20.58</td> <td>40.73</td> <td>34.70</td> <td>9.95</td> <td>31.96</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>107</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>64 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5411.50	53.42	74.00	-20.58	40.73	34.70	9.95	31.96							0.00	107								64 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																											
1 5411.50	53.42	74.00	-20.58	40.73	34.70	9.95	31.96																																											
						0.00	107																																											
							64 PEAK																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5394.50</td> <td>43.29</td> <td>54.00</td> <td>-10.71</td> <td>30.62</td> <td>34.68</td> <td>9.94</td> <td>31.95</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>107</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>64 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5394.50	43.29	54.00	-10.71	30.62	34.68	9.94	31.95							0.00	107								64 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																											
1 5394.50	43.29	54.00	-10.71	30.62	34.68	9.94	31.95																																											
						0.00	107																																											
							64 AVERAGE																																											



Mode	26																																																																	
	Band Edge - L																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																	
ANT	1																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5132.51 56.13 74.00 -17.87</td> <td>43.95 34.20 9.77 31.79 0.00</td> <td>100</td> <td>116</td> <td>PEAK</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5132.51 56.13 74.00 -17.87	43.95 34.20 9.77 31.79 0.00	100	116	PEAK				<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5210.00 97.12 -----</td> <td>84.72 34.40 9.84 31.84 0.00</td> <td>100</td> <td>116</td> <td>PEAK</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5210.00 97.12 -----	84.72 34.40 9.84 31.84 0.00	100	116	PEAK			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5132.51 56.13 74.00 -17.87	43.95 34.20 9.77 31.79 0.00	100	116	PEAK																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5210.00 97.12 -----	84.72 34.40 9.84 31.84 0.00	100	116	PEAK																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5148.47 47.74 54.00 -6.26</td> <td>35.55 34.20 9.79 31.00 0.00</td> <td>100</td> <td>116</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5148.47 47.74 54.00 -6.26	35.55 34.20 9.79 31.00 0.00	100	116	AVERAGE				<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5210.00 88.68 -----</td> <td>76.28 34.40 9.84 31.84 0.00</td> <td>100</td> <td>116</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg	1 5210.00 88.68 -----	76.28 34.40 9.84 31.84 0.00	100	116	AVERAGE			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5148.47 47.74 54.00 -6.26	35.55 34.20 9.79 31.00 0.00	100	116	AVERAGE																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																											
1 5210.00 88.68 -----	76.28 34.40 9.84 31.84 0.00	100	116	AVERAGE																																																														



Mode	26																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5451.25</td> <td>53.64</td> <td>74.00</td> <td>-20.36</td> <td>40.92</td> <td>34.70</td> <td>10.01</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>116 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5451.25	53.64	74.00	-20.36	40.92	34.70	10.01	31.99	0.00	100	116 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5451.25	53.64	74.00	-20.36	40.92	34.70	10.01	31.99	0.00	100	116 PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.50</td> <td>43.19</td> <td>54.00</td> <td>-10.81</td> <td>30.46</td> <td>34.70</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>116 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5457.50	43.19	54.00	-10.81	30.46	34.70	10.02	31.99	0.00	100	116 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5457.50	43.19	54.00	-10.81	30.46	34.70	10.02	31.99	0.00	100	116 AVERAGE																															



Mode	26																																																																											
	Harmonic																																																																											
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>43.69</td> <td>68.20</td> <td>-24.51</td> <td>52.88</td> <td>37.54</td> <td>14.17</td> <td>60.90</td> <td>0.00</td> <td>--- --- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10420.00	43.69	68.20	-24.51	52.88	37.54	14.17	60.90	0.00	--- --- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>44.44</td> <td>68.20</td> <td>-23.76</td> <td>53.63</td> <td>37.54</td> <td>14.17</td> <td>60.90</td> <td>0.00</td> <td>--- --- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10420.00	44.44	68.20	-23.76	53.63	37.54	14.17	60.90	0.00	--- --- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 10420.00	43.69	68.20	-24.51	52.88	37.54	14.17	60.90	0.00	--- --- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 10420.00	44.44	68.20	-23.76	53.63	37.54	14.17	60.90	0.00	--- --- PEAK																																																																			