



## Accredited testing-laboratory

**DAR registration number: DAT-P-176/94-D1**

**Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97**

**Recognized by the Federal Communications Commission**

**Anechoic chamber registration no.: 90462 (FCC)**

**Anechoic chamber registration no.: 3463A-1 (IC)**

**Certification ID: DE 0001**

**Accreditation ID: DE 0002**

**Accredited Bluetooth® Test Facility (BQTF)**

*The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license*

**Test report no. : 4-2857-01-05/07**  
**Type identification : N8400GPRS**  
**Applicant : VeriFone Inc.**  
**FCC ID : B32NURIT8400SSQ**  
**IC Certification No : 787C-N8400SSQ**  
**Test standards : 47 CFR Part 22**  
**47 CFR Part 24**  
**RSS - 210 Issue 7**

## Table of contents

<b>1</b>	<b>General information</b>	<b>3</b>
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Application details	4
<b>2</b>	<b>Test standard/s:</b>	<b>5</b>
<b>3</b>	<b>Technical tests</b>	<b>6</b>
3.1	Details of manufacturer	6
3.1.1	Test item	6
3.2	Test Setup	7
<b>4</b>	<b>Statement of Compliance</b>	<b>8</b>
4.1	Summary of Measurement Results	8
4.1.1	PCS 1900	8
4.1.2	GSM 850	8
<b>5</b>	<b>Measurements and results</b>	<b>9</b>
5.1	PART PCS 1900	9
5.1.1	RF Power Output	9
5.1.2	Frequency Stability	13
5.1.3	Radiated Emissions	16
5.1.4	Receiver Radiated Emissions	23
5.1.5	Conducted Spurious Emissions	26
5.1.6	Block Edge Compliance	29
5.1.7	Occupied Bandwidth	31
5.2	PART GSM 850	35
5.2.1	RF Power Output	35
5.2.2	Frequency Stability	38
5.2.3	Radiated Emissions	41
5.2.4	Receiver Radiated Emissions	49
5.2.5	Conducted Spurious Emissions	52
5.2.6	Block Edge Compliance	55
5.2.7	Occupied Bandwidth	57
<b>6</b>	<b>Test equipment and ancillaries used for tests</b>	<b>61</b>
<b>7</b>	<b>Photographs of the Test Set-up</b>	<b>65</b>

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

**Test laboratory manager:**

2007-12-19

René Oelmann



Date


Name

Signature

**Technical responsibility for area of testing:**

2007-12-19

Michael Berg

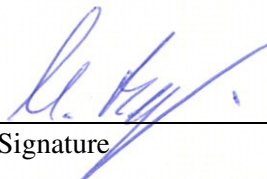

Date

Name

Signature

## 1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10  
66117 Saarbrücken  
Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to  
DIN EN ISO/IEC 17025  
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :  
Street :  
Town :  
Country :  
Phone :  
Fax :

## 1.3 Details of applicant

<b>Name:</b>	VeriFone Inc.
<b>Street:</b>	11 Ha'amal Street
<b>Town:</b>	48092 Park Afek Rosh Ha'ayin
<b>Country:</b>	Israel
<b>Telephone:</b>	+972 (0) 3 90 29 730 ext. 8268
<b>Fax:</b>	+972 (0) 3 90 29 731
<b>Contact:</b>	Mr. Andrey Glemb
<b>E-mail:</b>	Andrey_Glemb@verifone.com
<b>Telephone:</b>	+972 (0) 3 90 29 730 ext. 8268

## 1.4 Application details

<b>Date of receipt of order:</b>	2007-11-28
<b>Date of receipt of test item:</b>	2007-11-28
<b>Date of start test:</b>	2007-11-28
<b>Date of end test:</b>	2007-12-05
<b>Persons(s) who have been present during the test:</b>	Andrey Glemb

---

## 2 Test standard/s:

47 CFR Part 22	2006-10	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 22-Public mobile services
47 CFR Part 24	2006-10	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 24-Personal communications services
RSS - 210 Issue 7	2007-06	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

### 3 Technical tests

#### 3.1 Details of manufacturer

Name:	VeriFone Inc.
Street:	11 Ha'amal Street
Town:	48092 Park Afek Rosh Ha'ayin
Country:	Israel

##### 3.1.1 Test item

Kind of test item	:	GPRS Desktop Device Payment Terminal
Model	:	N8400GPRS
Serial Number	:	1007034091
Frequency	:	1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz
Occupied Bandwidth GSM 850/1900	:	280.00 kHz   276.03 kHz
Type of modulation GSM 850	:	280KGXW (GMSK)
Type of modulation GSM 1900	:	276KGXW (GMSK)
Number of channels	:	300 (PCS1900) and 125 (PCS850)
Antenna Type	:	Internal antenna
Power supply (normal)	:	DC by Charger 9 Volt
Output power GSM 850 / GMSK	:	Cond.: 31.80 dBm Peak ERP: 26.71 dBm (Burst);
Output power GSM 1900 / GMSK	:	Cond.: 26.67 dBm Peak EIRP: 27.69 dBm (Burst)
Transmitter Spurious (worst case)	:	No critical peaks detected
Receiver Spurious (worst case)	:	No critical peaks detected
FCC ID	:	B32NURIT8400SSQ
Certification No. IC	:	787C-N8400SSQ
Open Area Test Site IC No.	:	IC 3463A-1
IC Standards	:	RSS132, Issue 2, RSS133, Issue 3

**ATTESTATION:**

**DECLARATION OF COMPLIANCE:**

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

**Laboratory Manager:**

2007-12-19	<b>René Oelmann</b>	
Date	Name	Signature

### 3.2 Test Setup

Hardware : G00  
Software : NOS 7 06

Mobile; (cond. measurements) : SN: 1007034091  
Mobile; (rad. measurements) : SN: 1007034091

The radiated measurements were performed with Standard world wide charger.

## 4 Statement of Compliance

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### 4.1 Summary of Measurement Results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

#### 4.1.1 PCS 1900

Section in this Report	Test Name	Verdict
3.1.1	RF Power Output	pass
3.1.2	Frequency Stability	pass
3.1.3	Radiated Emissions	pass
3.1.4	Receiver Radiated Emissions	pass
3.1.5	Conducted Spurious Emissions	pass
3.1.6	Block Edge Compliance	pass
3.1.7	Occupied Bandwidth	pass

#### 4.1.2 GSM 850

Section in this Report	Test Name	Verdict
3.2.1	RF Power Output	pass
3.2.2	Frequency Stability	pass
3.2.3	Radiated Emissions	pass
3.2.4	Receiver Radiated Emissions	pass
3.2.5	Conducted Spurious Emissions	pass
3.2.6	Block Edge Compliance	pass
3.2.7	Occupied Bandwidth	pass



## 5 Measurements and results

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. The device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link). All relevant tests have been repeated in 8-PSK Modulation if EDGE Mode is supported.

### 5.1 PART PCS 1900

#### 5.1.1 RF Power Output

##### Reference

FCC:	CFR Part 24.232, 2.1046
IC:	RSS 133, Issue 3, Section 4.3

##### Summary:

This paragraph contains both average/peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

##### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range).

##### Limits:

Nominal Peak Output Power (dBm)
+33

##### Test Results: Output Power (conducted) GMSK Mode

Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	26.55	26.53
1880.0	26.67	26.65
1909.8	26.12	26.10
Measurement uncertainty	±0.5 dB	

## EIRP Measurements

### Description:

This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements were performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

**Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method**

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency : equal to the signal source  
 Resolution BW : 10 kHz  
 Video BW : same  
 Detector Mode : positive  
 Average : off  
 Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna):

.DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz}.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+33

**Test Results: Output Power (radiated) GMSK Mode**

Frequency (MHz)	Burst Peak EIRP (dBm)
1850.2	27.69
1880.0	26.75
1909.8	25.51
Measurement uncertainty	±0.5 dB

**Sample Calculation:**

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dBμV	dBm	dB <i>i</i>	dB <i>d</i>	dB	dBm			
1909.8	132.3	24.6	8.4	0.0	3.3	29.7			

$EIRP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB*i*)}$

### 5.1.2 Frequency Stability

#### Reference

FCC:	CFR Part 24.235, 2.1055
IC:	RSS 133, Issue 3, Section 4.2

#### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with Vnom, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with Vnom. Vary supply voltage from Vmin to Vmax, in 12 steps re-measuring carrier frequency at each voltage. Pause at Vnom for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with Vnom, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### Measurement Limit:



According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

**Test Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
8.1	+21	0.00000112	0,0112
8.2	+22	0.00000117	0,0117
8.3	+23	0.00000122	0,0122
8.4	+22	0.00000117	0,0117
8.5	-16	-0.00000085	-0,0085
8.6	-19	-0.00000101	-0,0101
8.7	+19	0.00000101	0,0101
8.8	+19	0.00000101	0,0101
8.9	-19	-0.00000101	-0,0101
9.0	-20	-0.00000106	-0,0106
9.1	-21	-0.00000112	-0,0112
9.2	-23	-0.00000122	-0,0122
9.3	-21	-0.00000112	-0,0112
9.4	-19	-0.00000101	-0,0101
9.5	-19	-0.00000101	-0,0101
9.6	-18	-0.00000096	-0,0096
9.7	-18	-0.00000096	-0,0096
9.8	-21	-0.00000112	-0,0112
9.9	-19	-0.00000101	-0,0101

**Test Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-20	+35	0.00000186	0.0186
-10	-25	-0.00000133	-0.0133
±0.0	+22	0.00000117	0.0117
+10	-25	-0.00000133	-0.0133
+20	-20	-0.00000106	-0.0106
+30	+23	0.00000122	0.0122
+40	+19	0.00000101	0.0101
+50	+27	0.00000144	0.0144
+60	+19	0.00000101	0.0101

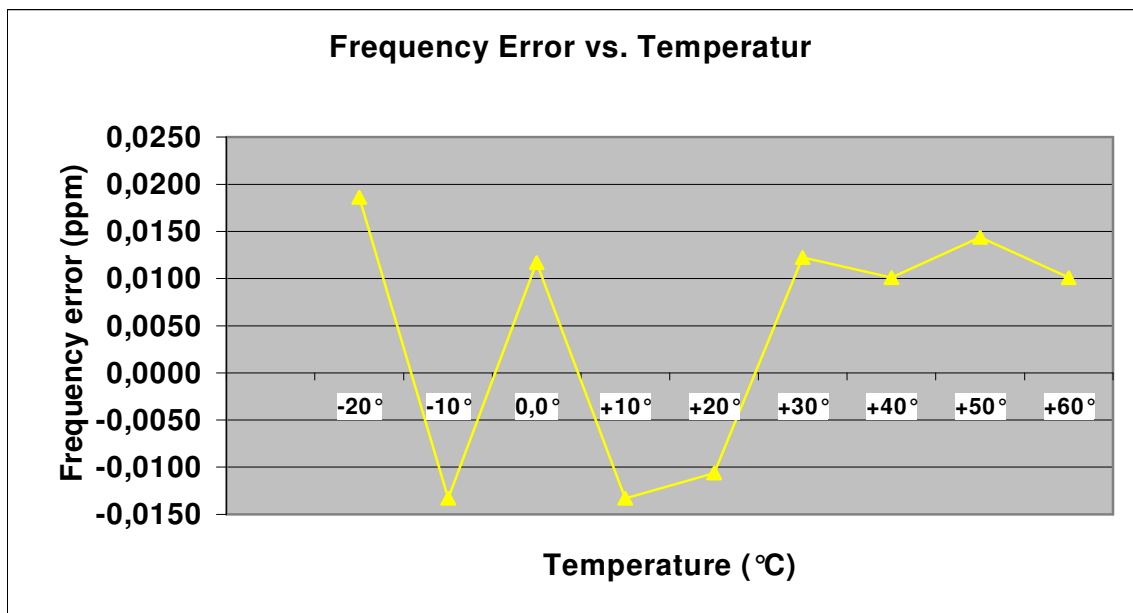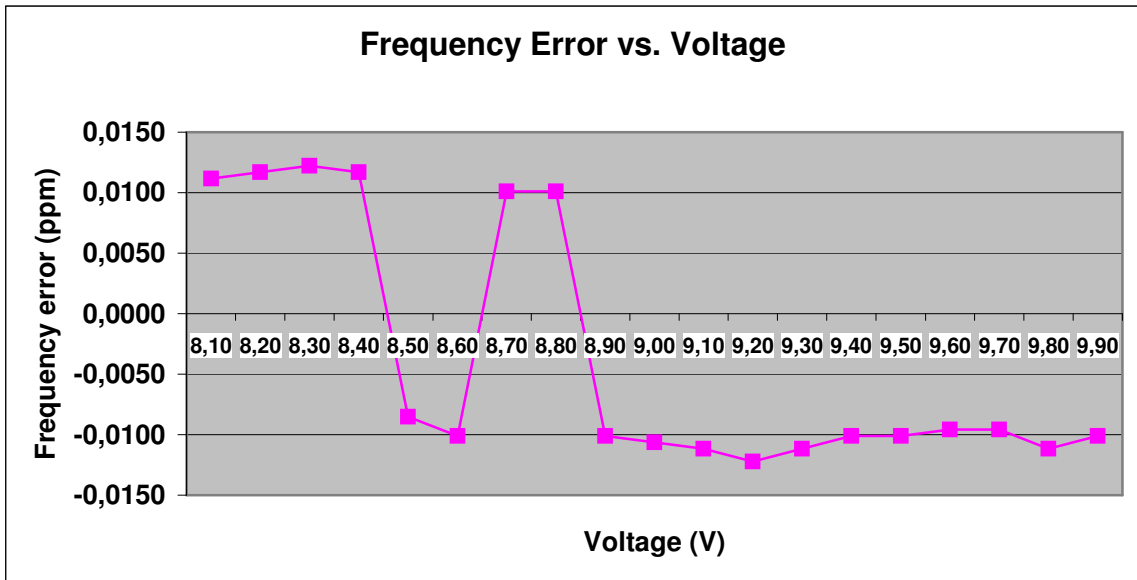

### 5.1.3 Radiated Emissions

#### Reference

FCC:	CFR Part 24.238, 2.1053
IC:	RSS 133, Issue 3, Section 4.4

#### Measurement Results: Radiated Emissions

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next table.

All measurements were done in horizontal and vertical polarization, the plots show the worst case. As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-

**No peaks found < 20 dB below limit.**


#### Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result			
MHz	dB $\mu$ V	dBm	dBi	dBd	dB	dBm			
1909.8	132.3	24.6	8.4	0.0	3.3	29.7			


EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dBi)



**Traffic mode up to 30 MHz (Valid for all 3 channels)**

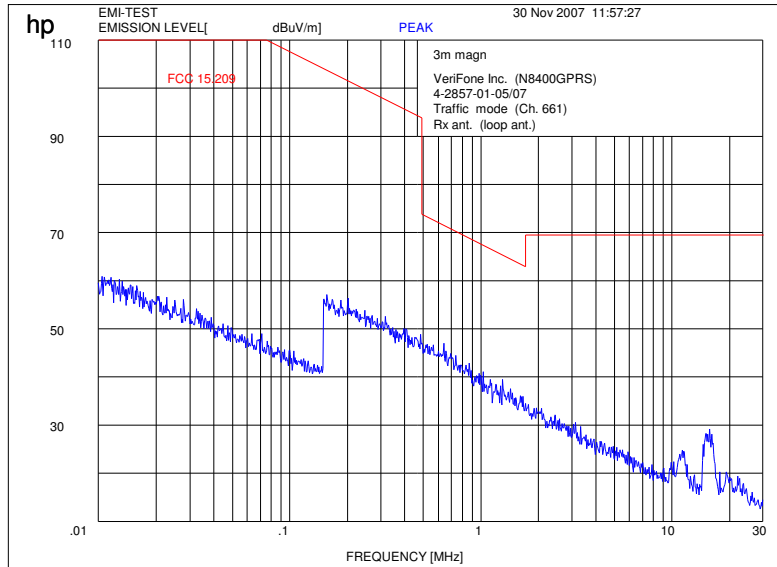


**Channel 512 (30 MHz - 1 GHz)**

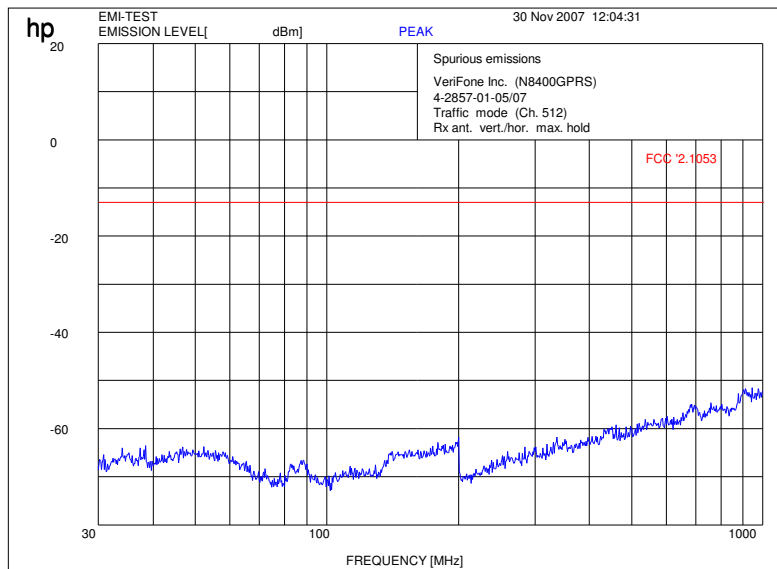

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


**Channel 512 (1 GHz - 4 GHz)**

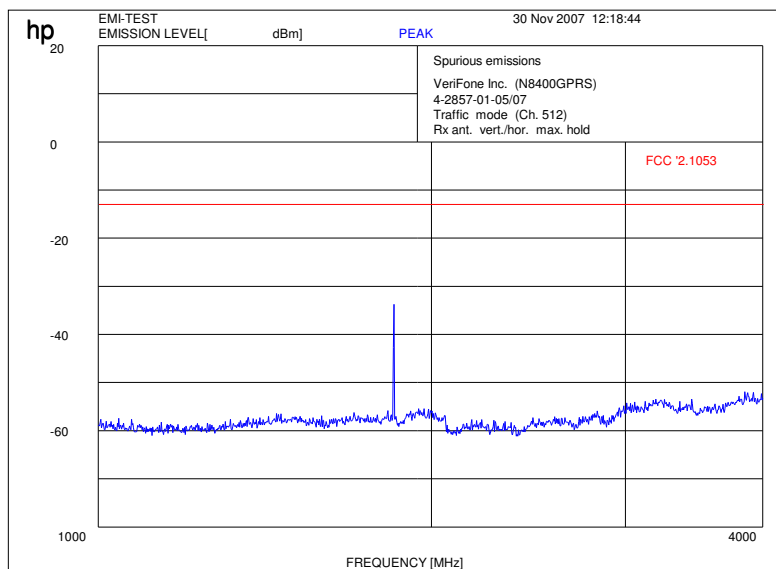

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz  
Carrier suppressed with a rejection filter

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


**Channel 512 (4 GHz – 12.5 GHz)**

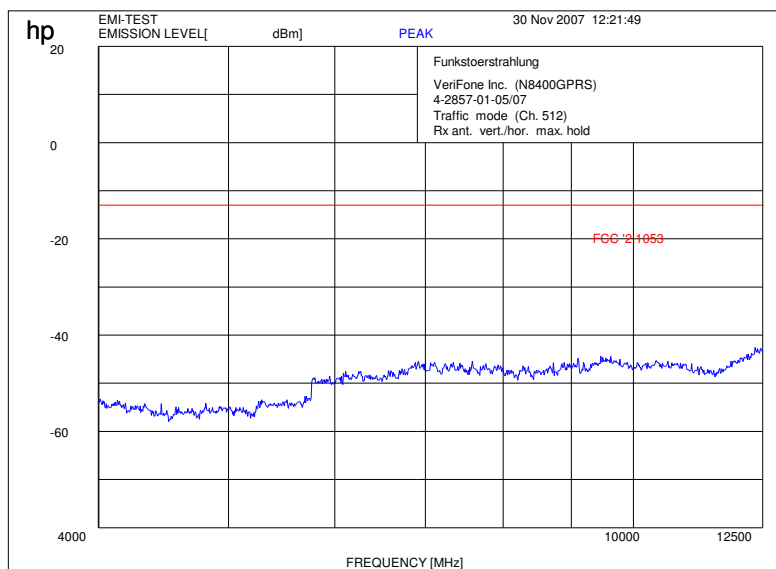


$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

**Channel 512 (12 GHz - 25 GHz) valid for all 3 channels**

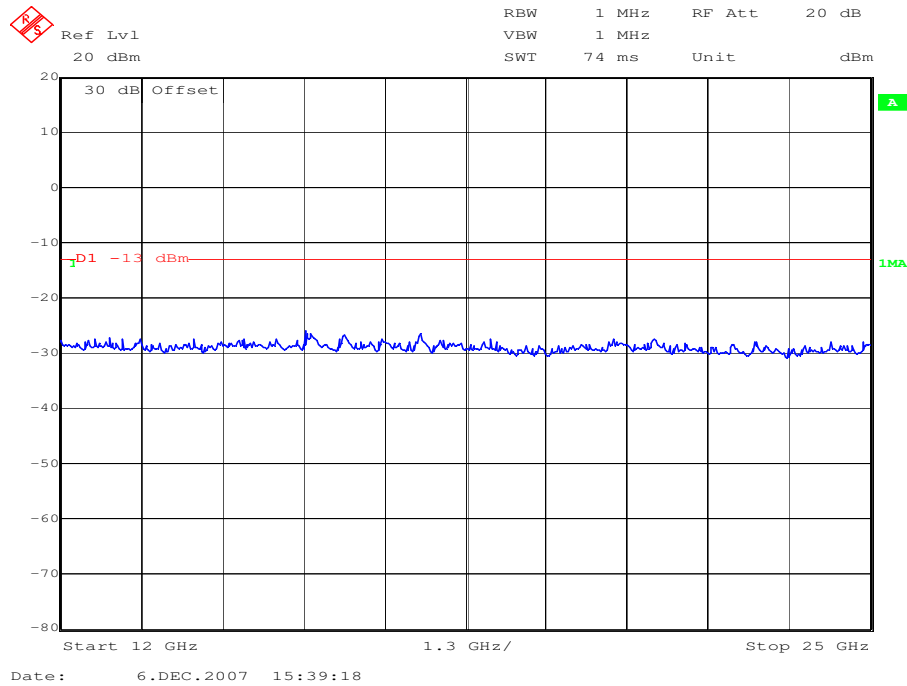


**Channel 661 (30 MHz - 1 GHz)**

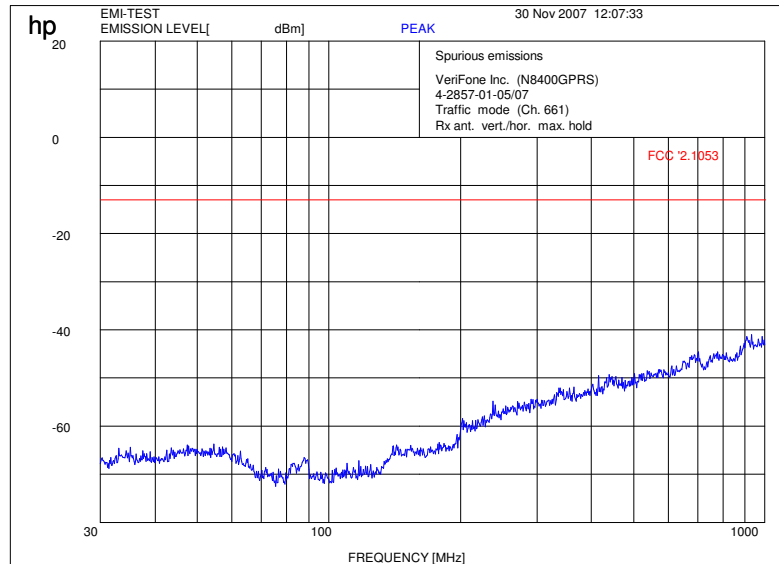

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


**Channel 661 (1 GHz - 4 GHz)**

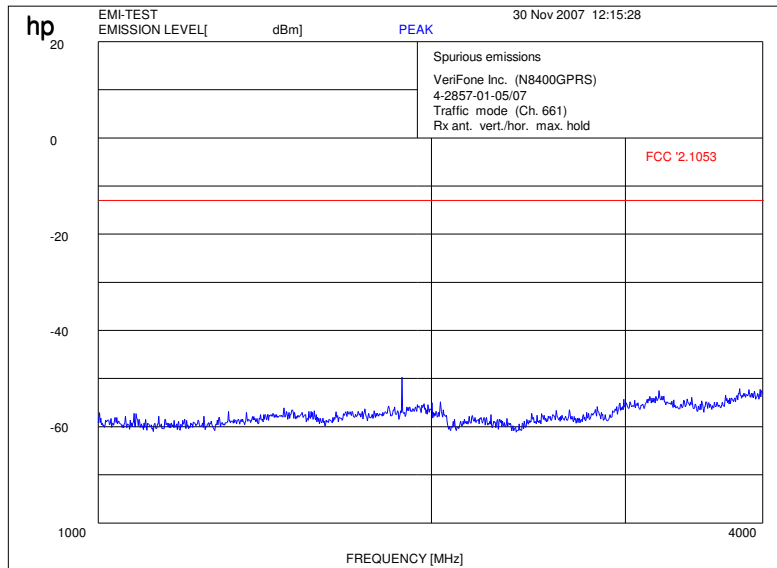

f < 1 GHz : RBW/VBW: 100 kHz  
Carrier suppressed with a rejection filter

f ≥ 1GHz : RBW / VBW 1 MHz


**Channel 661 (4 GHz – 12.5 GHz)**

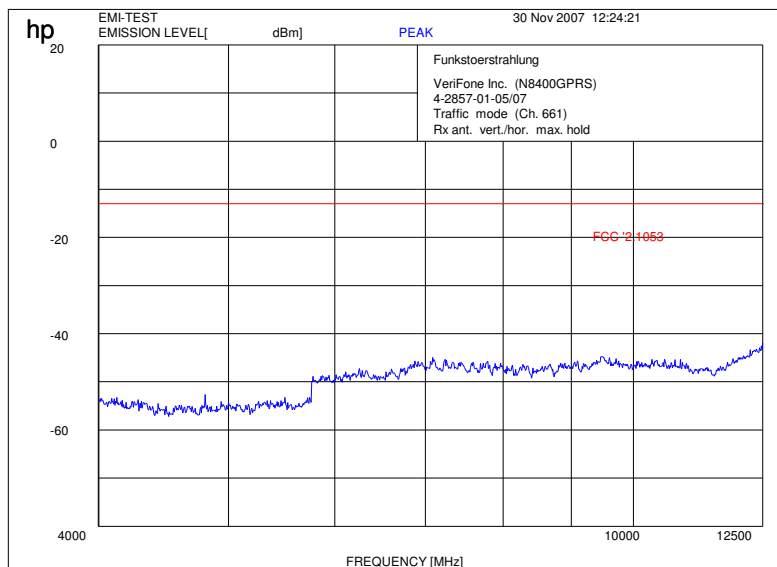

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


**Channel 810 (30 MHz - 1 GHz)**

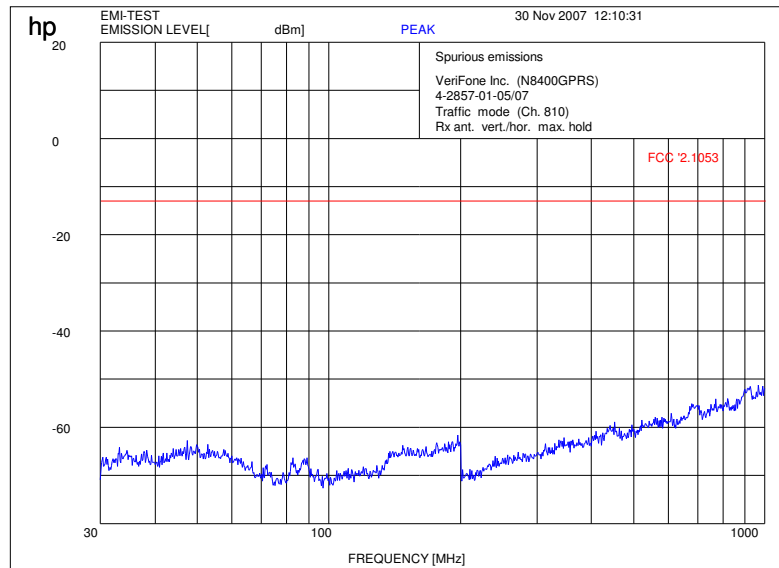

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

**Channel 810 (1 GHz - 4 GHz)**

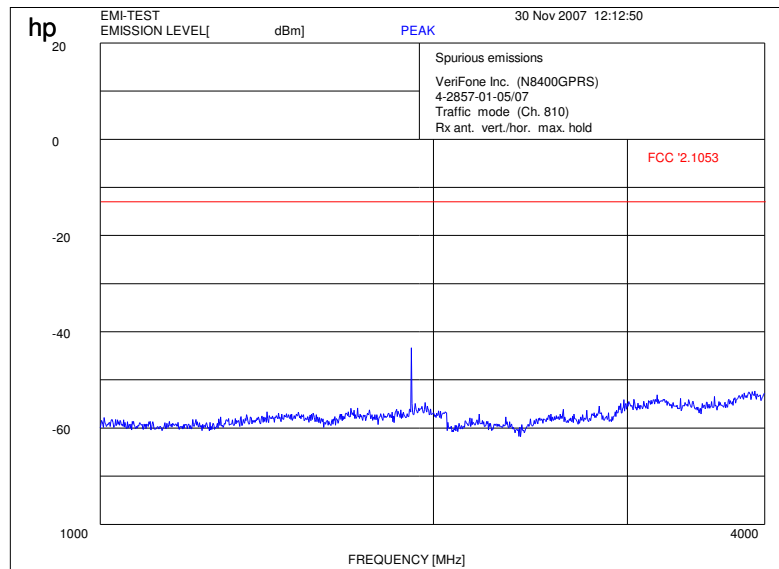


$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

Channel 810 (4 GHz – 12.5 GHz)

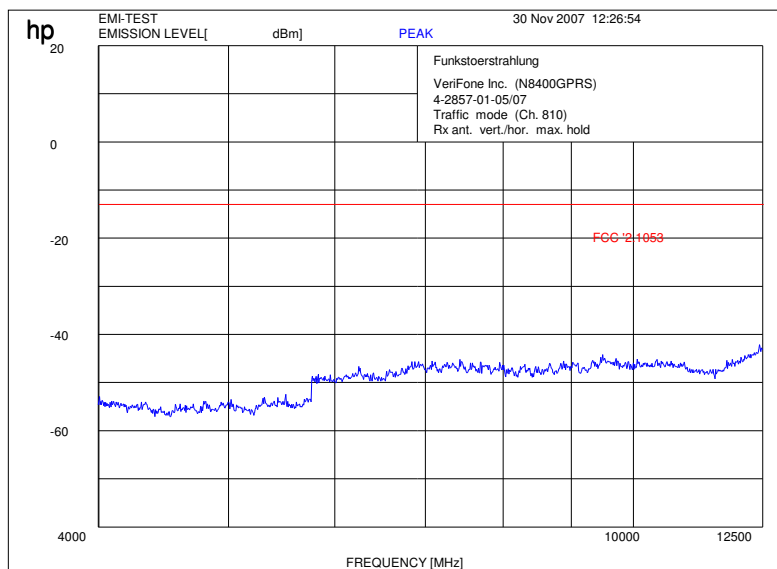

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

### 5.1.4 Receiver Radiated Emissions

#### Reference

FCC:	CFR Part 15.109, 2.1053
IC:	RSS 133, Issue 3, Section 4.5

#### Measurement Results

SPURIOUS EMISSIONS LEVEL ( $\mu\text{V/m}$ )								
Idle mode								
f (MHz)	Detector	Level ( $\mu\text{V/m}$ )	f (MHz)	Detector	Level ( $\mu\text{V/m}$ )	f (MHz)	Detector	Level ( $\mu\text{V/m}$ )
No critical peaks detected.			-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
Measurement uncertainty			$\pm 3$ dB					

$f < 1$  GHz : RBW/VBW: 100 kHz

$f \geq 1$ GHz : RBW/VBW: 1 MHz


H = Horizontal ; V= Vertical

For measurement distance see table below

#### Limits: § 15.109

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3


**Idle Mode (30 MHz - 1 GHz)**

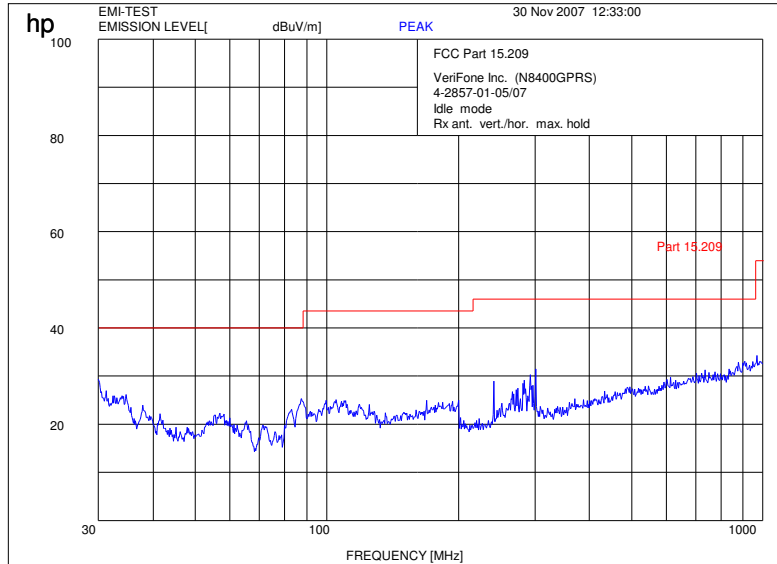

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

**Idle Mode (1 MHz - 4 GHz)**

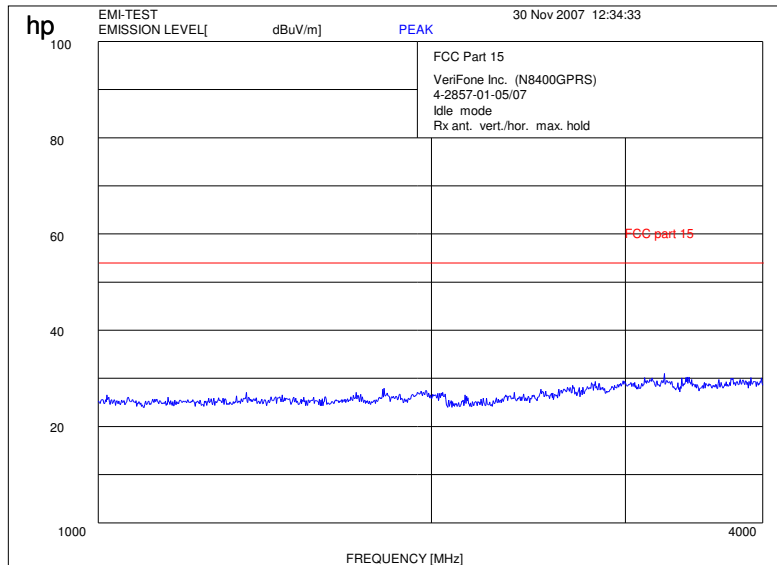


f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz




**Idle Mode (4 GHz – 12.0 GHz)**

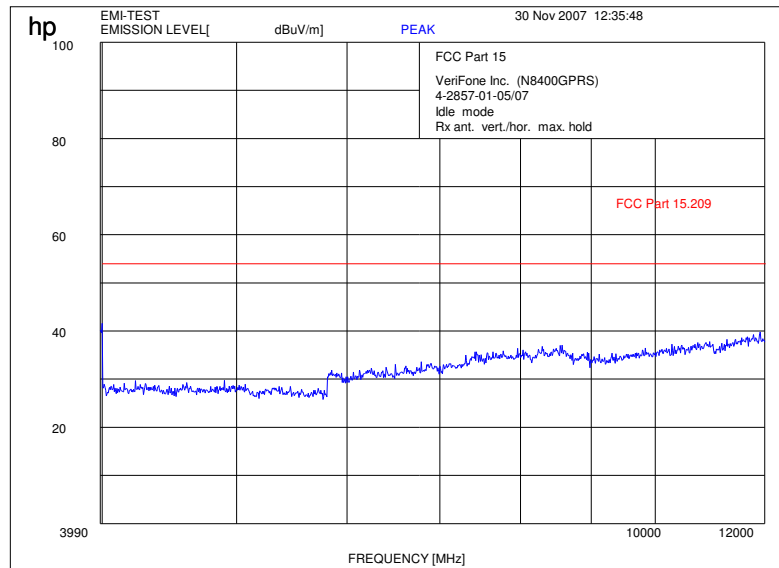

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

**Idle Mode (12 GHz - 25 GHz)**

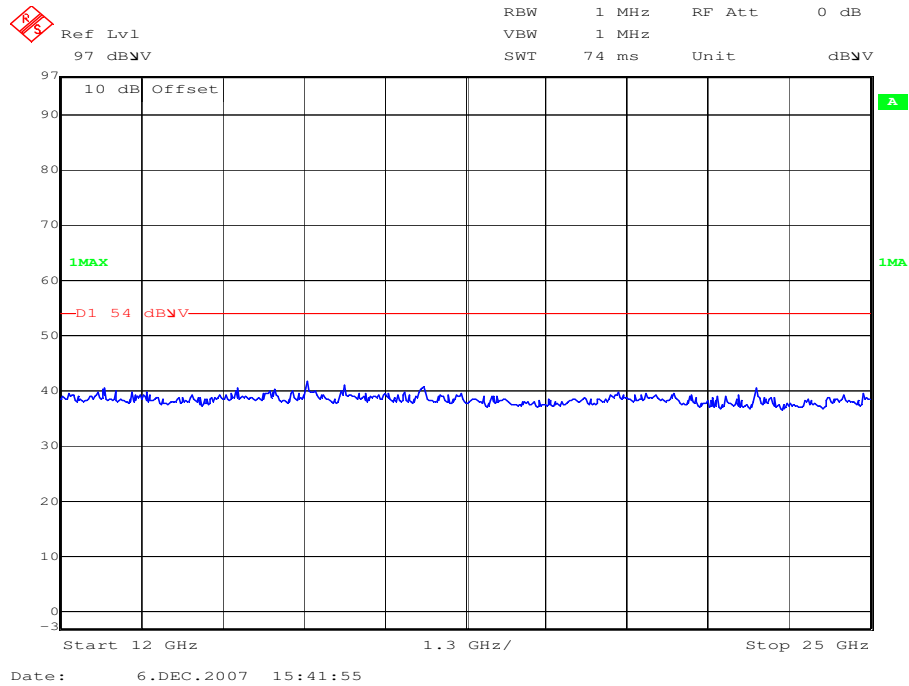

### 5.1.5 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 24.238, 2.10.51
IC:	RSS 133, Issue 3, Section 4.4

#### Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency:

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz


#### Measurement Limit:

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


#### Measurement Results:

Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-


Channel: 512

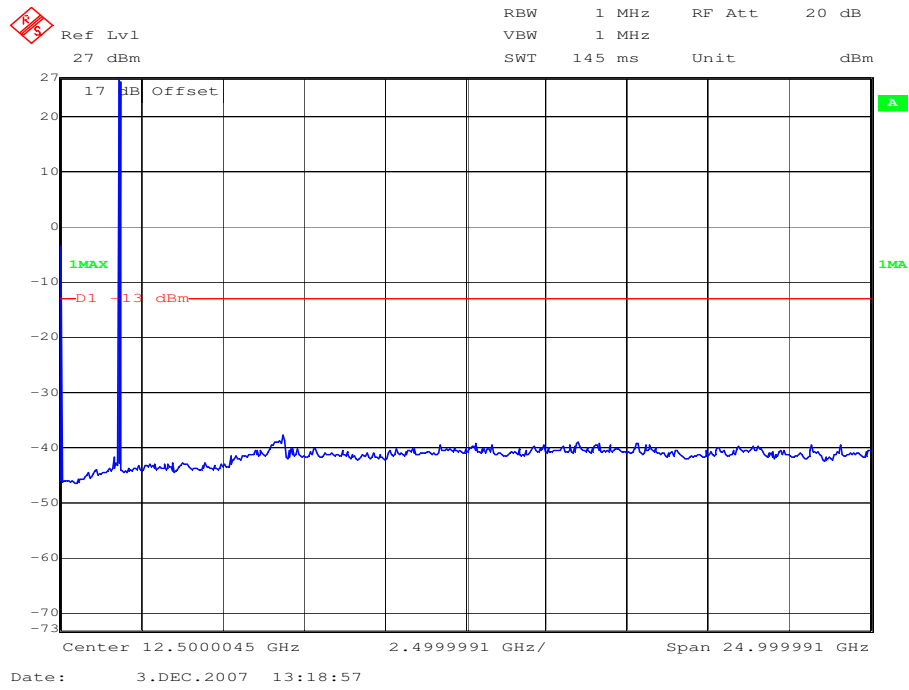

Channel 661

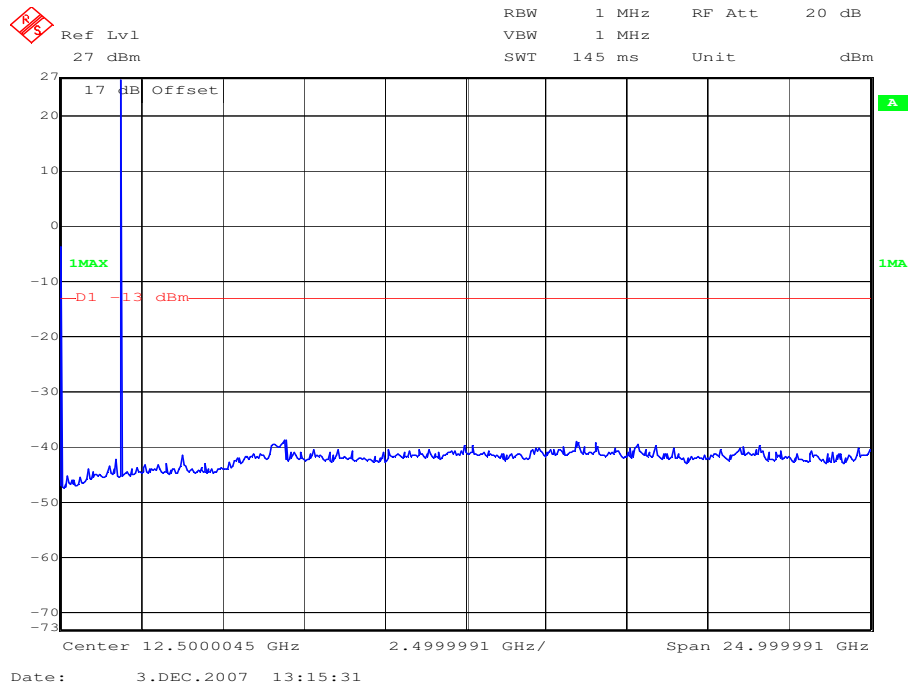

Channel 810

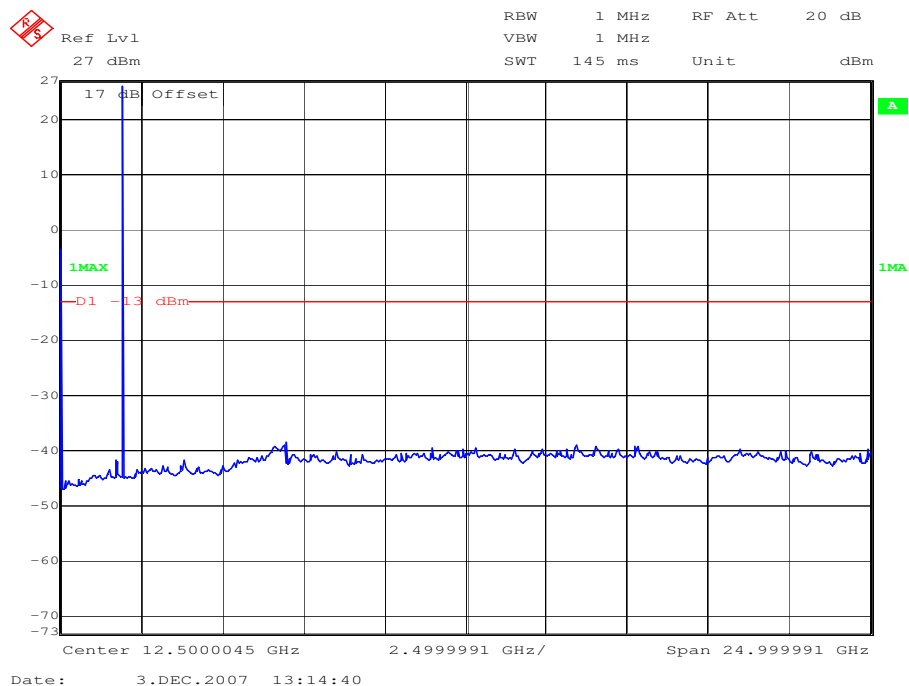

---

### 5.1.6 Block Edge Compliance


#### Reference

FCC:	CFR Part 24.238
IC:	RSS 133, Issue 3, Section 6.5


#### Measurement Limit:

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Block 1 Channel 512

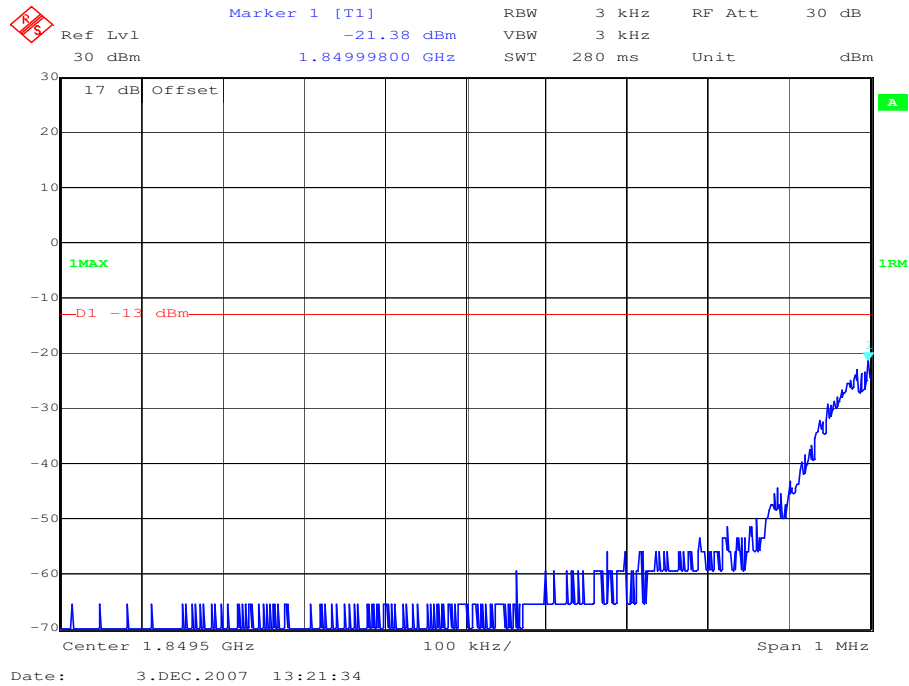

Block 6 Channel 810

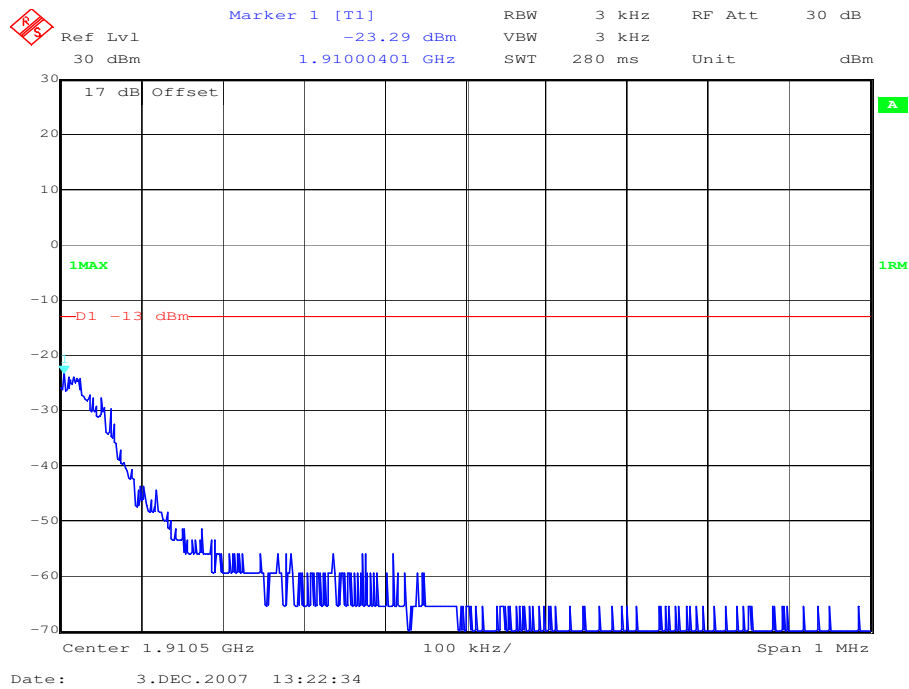

### 5.1.7 Occupied Bandwidth

#### Reference

FCC:	CFR Part 24.238, 2.1049
IC:	RSS 133, Issue 3, Section 6.5

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.


Normal mode

Frequency	99% Occupied Bandwidth kHz	-26 dBc Bandwidth kHz
1850.2 MHz	276.03	315.99
1880.0 MHz	276.01	312.02
1909.8 MHz	268.06	308.02

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300.0 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.


**Channel 512**

**99% (-20 dB) Occupied Bandwidth**

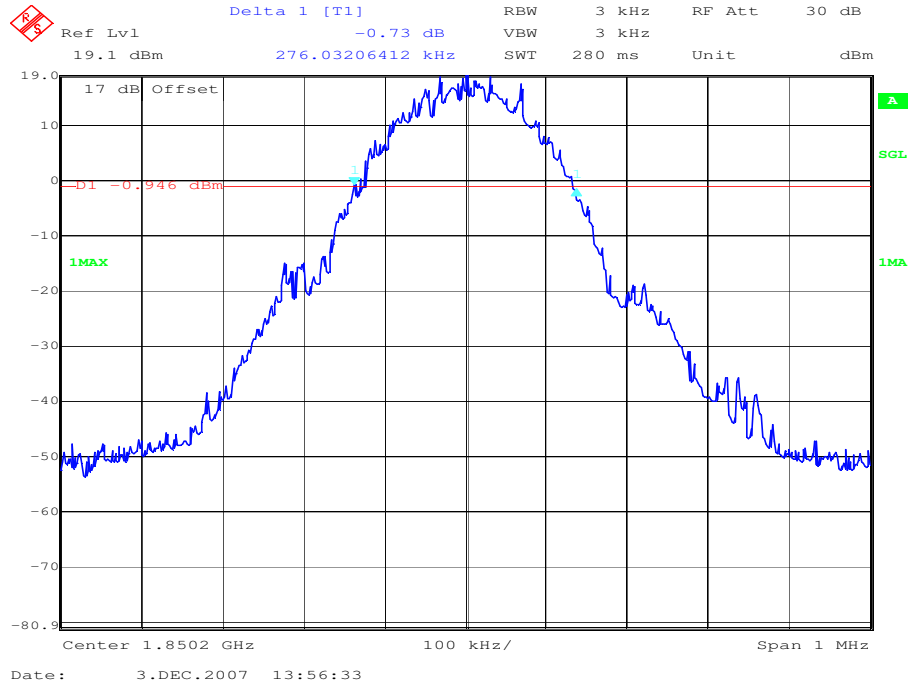

**Channel 512**


**-26 dBc Bandwidth**

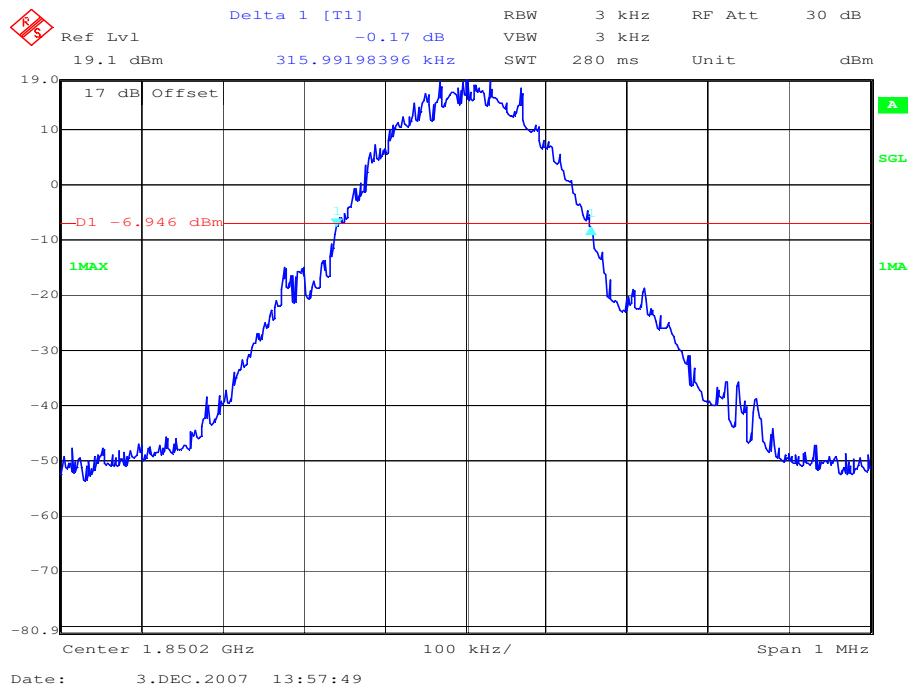




**Channel 661**

**99% (-20 dB) Occupied Bandwidth**

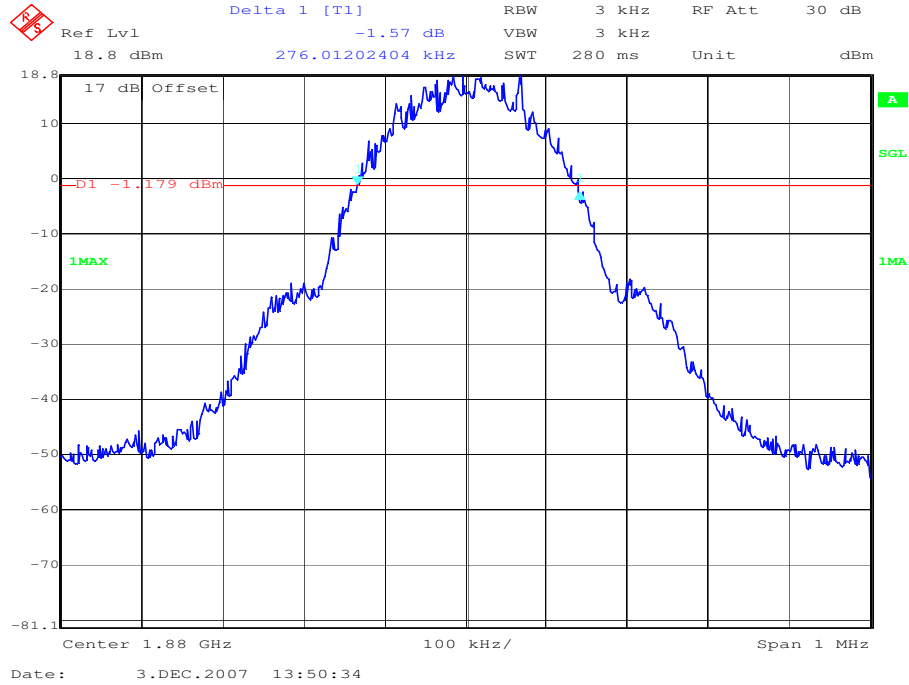


**Channel 661**

**-26 dBc Bandwidth**

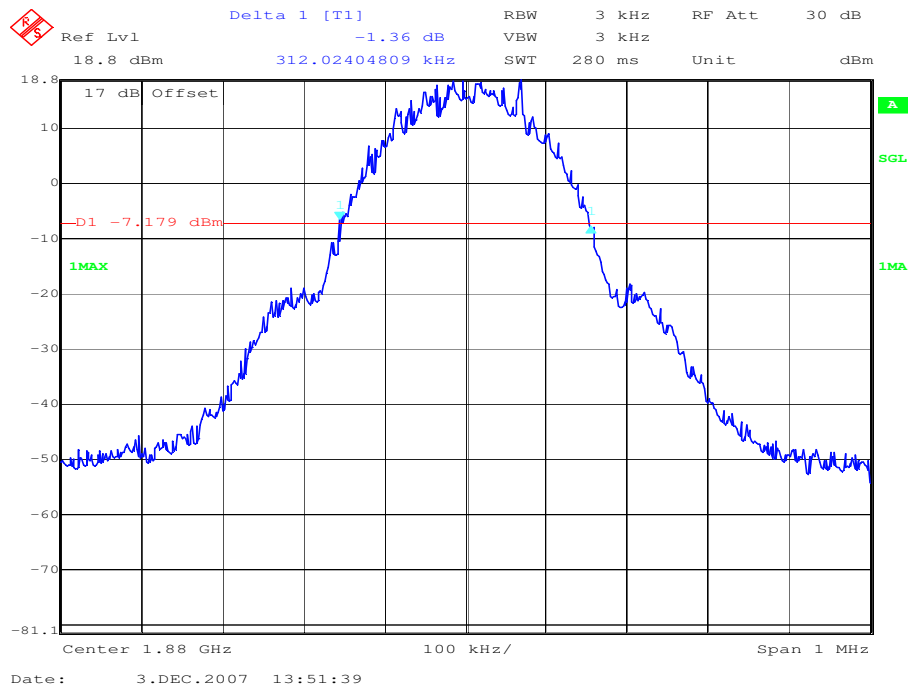


**Channel 810**

**99% (-20 dB) Occupied Bandwidth**

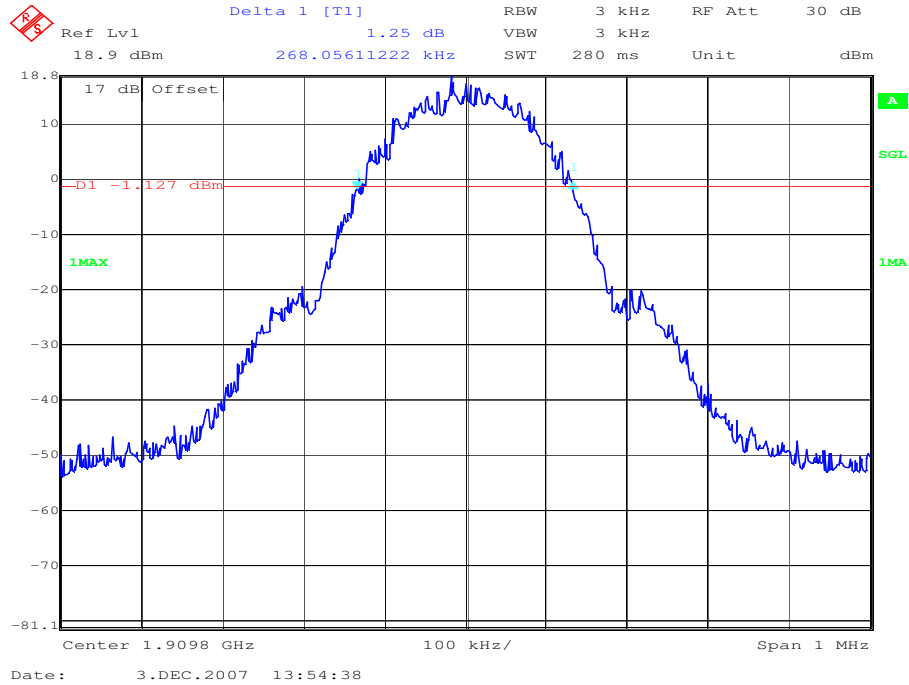

**Channel 810**

**-26 dBc Bandwidth**

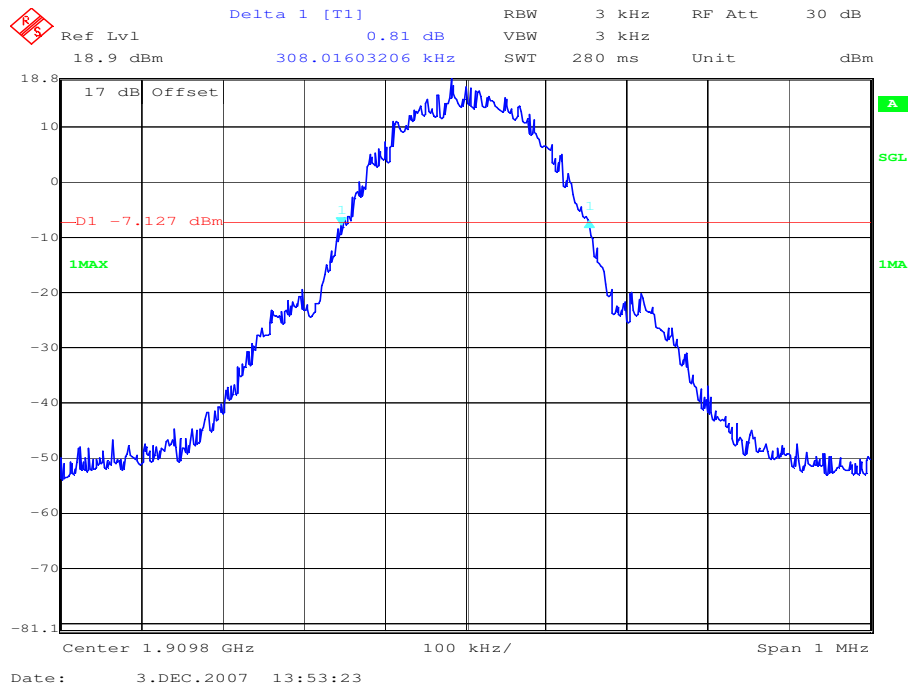

## 5.2 PART GSM 850

### 5.2.1 RF Power Output

#### Reference

FCC:	CFR Part 22.9.1.3, 2.1046
IC:	RSS 132, Issue 2, Section 4.4 and 6.4

#### Summary:

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation. The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average) These measurements were done at 3 frequencies, 824.2 MHz, 836.4 MHz and 848.8 MHz (bottom, middle and top of operational frequency range).

#### Limits:

Nominal Peak Output Power (dBm)
+38.45

#### Measurements Results Output Power (conducted)

Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	31.34	31.31
836.4	31.73	31.69
848.8	31.80	31.77
Measurement uncertainty	±0.5 dB	

**ERP Measurements**

Description: This is the test for the maximum radiated power from the phone.  
 Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m test site (listed with FCC, IC).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
 Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (f) Set the EMI Receiver and #2 as follows:  
 Center Frequency: test frequency  
 Resolution BW: 100 kHz  
 Video BW: same  
 Detector Mode: positive  
 Average: off  
 Span: 3 x the signal bandwidth
- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

**Measuring the ERP of Spurious/Harmonic Emissions using Substitution Method**

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring ERP) as follows:  
 Center Frequency : equal to the signal source  
 Resolution BW : 10 kHz  
 Video BW : same  
 Detector Mode : positive  
 Average : off  
 Span : 3 x the signal bandwidth
- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level  
 Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$
- (c) Select the frequency and E-field levels for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antennas (substitution antenna):  
 .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune its elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- (n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:  
 $P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$   
 $EIRP = P + G1 = P3 + L2 - L1 + A + G1$   
 $ERP = EIRP - 2.15 \text{ dB}$

Total Correction factor in EMI Receiver # 2 = L2 – L1 + G1

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

**Limits:**

Nominal Peak Output Power (dBm)
+38.45

**Measurement Results Output Power (Radiated) GMSK Mode**

Frequency (MHz)	Burst Peak (dBm)
824.2	26.68
836.4	26.37
848.8	26.71
Measurement uncertainty	±0.5 dB

**Sample calculation:**

Freg	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dBµV	dBm	dB <sub>i</sub>	dB <sub>d</sub>	dB	dBm	
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460

ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

\*ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dB<sub>i</sub>

## 5.2.2 Frequency Stability

### Reference

FCC:	CFR Part 22.355, 2.1055
IC:	RSS 132, Issue 2, Section 4.3 and 6.3

### Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.7 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### Measurement Limit:



According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.

**Measurement Results: AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
8.1	-16	-0.00000188	-0.0188
8.2	-15	-0.00000176	-0.0176
8.3	-16	-0.00000188	-0.0188
8.4	-15	-0.00000176	-0.0176
8.5	-14	-0.00000165	-0.0165
8.6	-15	-0.00000176	-0.0176
8.7	-15	-0.00000176	-0.0176
8.8	-15	-0.00000176	-0.0176
8.9	-15	-0.00000176	-0.0176
9.0	-16	-0.00000188	-0.0188
9.1	-17	-0.00000200	-0.0200
9.2	-15	-0.00000176	-0.0176
9.3	-17	-0.00000200	-0.0200
9.4	-17	-0.00000200	-0.0200
9.5	-17	-0.00000200	-0.0200
9.6	-18	-0.00000212	-0.0212
9.7	-18	-0.00000212	-0.0212
9.8	-21	-0.00000247	-0.0247
9.9	-22	-0.00000259	-0.0259

**Measurement Results: AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-20	-19	-0.00000224	-0.0224
-10	-17	-0.00000200	-0.0200
±0.0	-17	-0.00000200	-0.0200
+10	-20	-0.00000235	-0.0235
+20	-16	-0.00000188	-0.0188
+30	-16	-0.00000188	-0.0188
+40	-18	-0.00000212	-0.0212
+50	-16	-0.00000188	-0.0188
+60	-19	-0.00000224	-0.0224

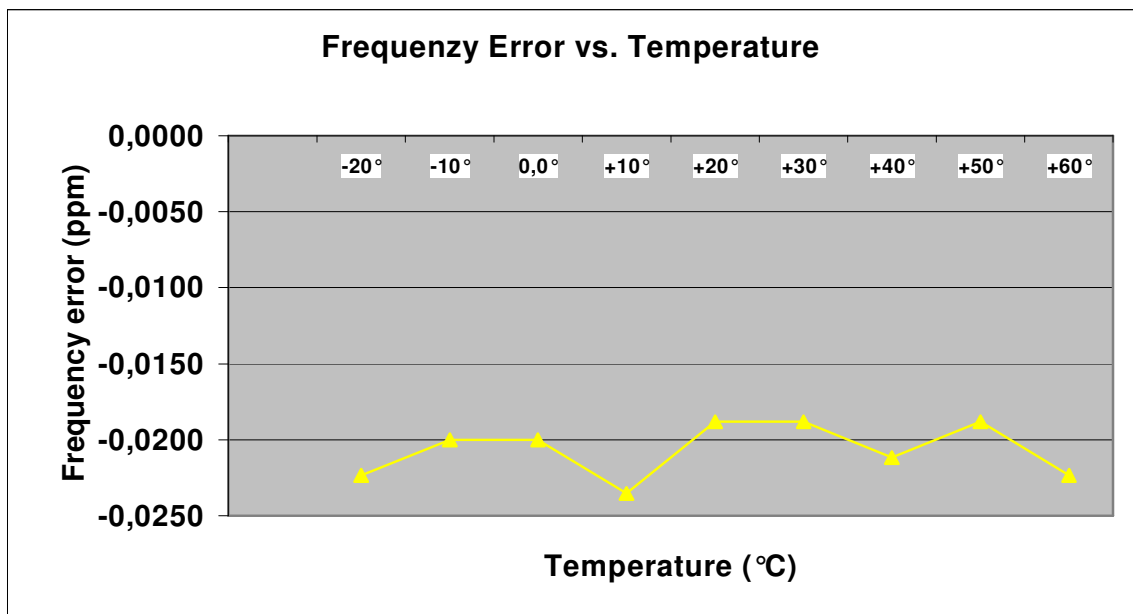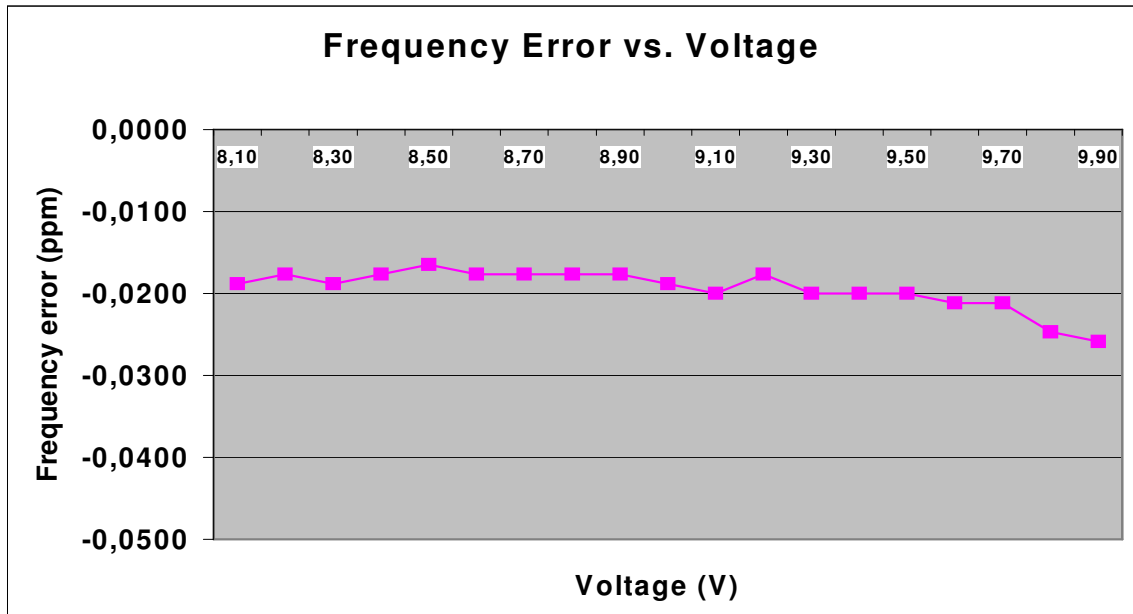



### 5.2.3 Radiated Emissions

#### Reference

FCC:	CFR Part 22.917, 2.1053
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-128 Freq. (MHz)	Level (dBm)	Tx ch.-189 Freq. (MHz)	Level (dBm)	Tx ch.-251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1672.8	-	1697.6	-
3	2472.6	-	2509.2	-	2546.4	-
4	3296.8	-	3345.6	-	3395.2	-
5	4121.0	-	4182.0	-	4244.0	-
6	4945.2	-	5018.4	-	5092.8	-
7	5769.4	-	5854.8	-	5941.6	-
8	6593.6	-	6691.2	-	6790.4	-
9	7417.8	-	7527.6	-	7639.2	-
10	8242.0	-	8364.0	-	8488.0	-


#### Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERP	Substitution Antenna
MHz	dBμV	dBm	dBi	dBd	dB	dBm	
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460


$$ERP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB)}$$

\*ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.1\text{dBi}$

Traffic mode up to 30 MHz (Valid for all 3 channels)

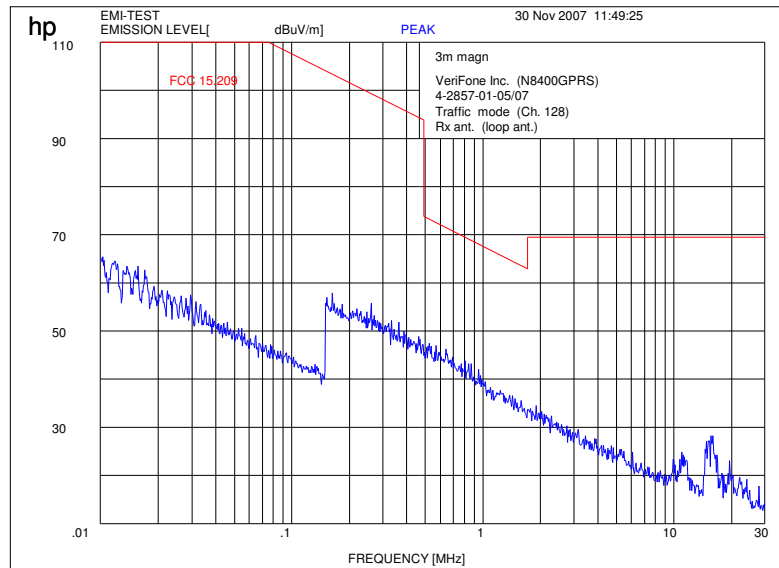


Channel 128 (30 MHz - 1 GHz)

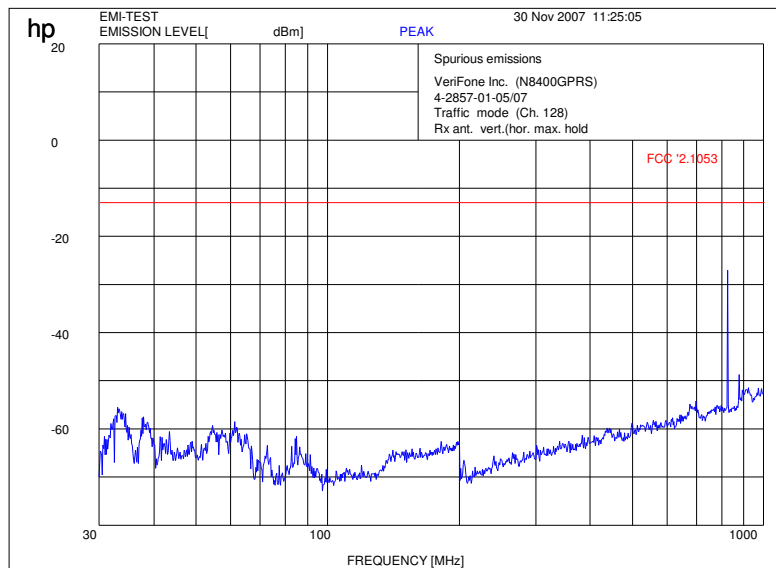

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz  
Carrier suppressed with a rejection filter

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


**Channel 128 (1 GHz - 4 GHz)**

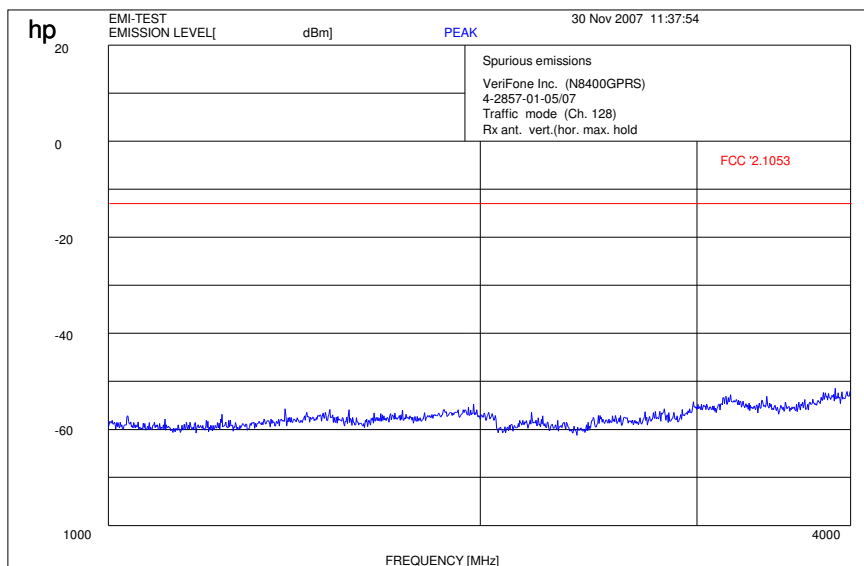

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


**Channel 128 (4 GHz – 12.5 GHz)**

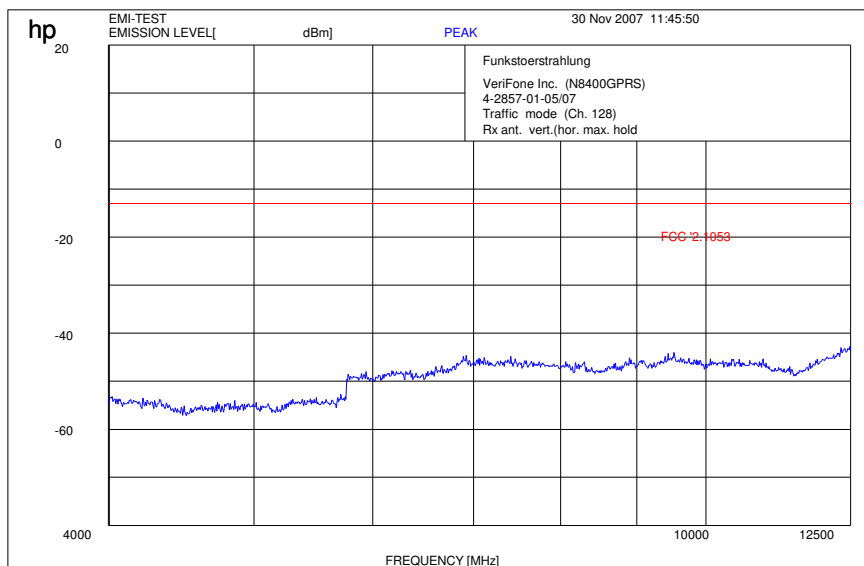


f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

Channel 128 (12 GHz - 25 GHz) valid for all 3 channels

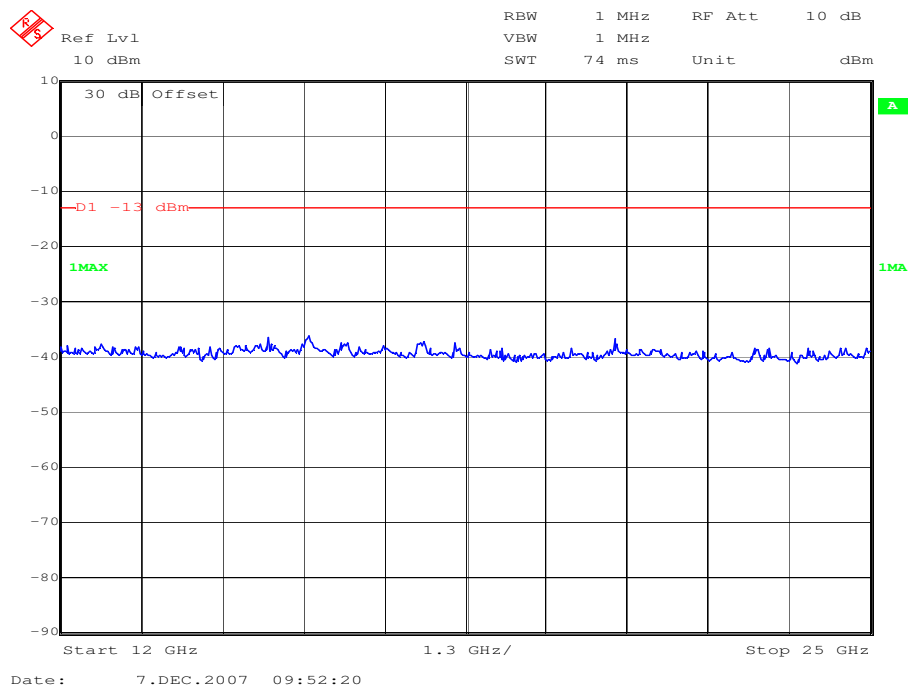


**Channel 189 (30 MHz - 1 GHz)**

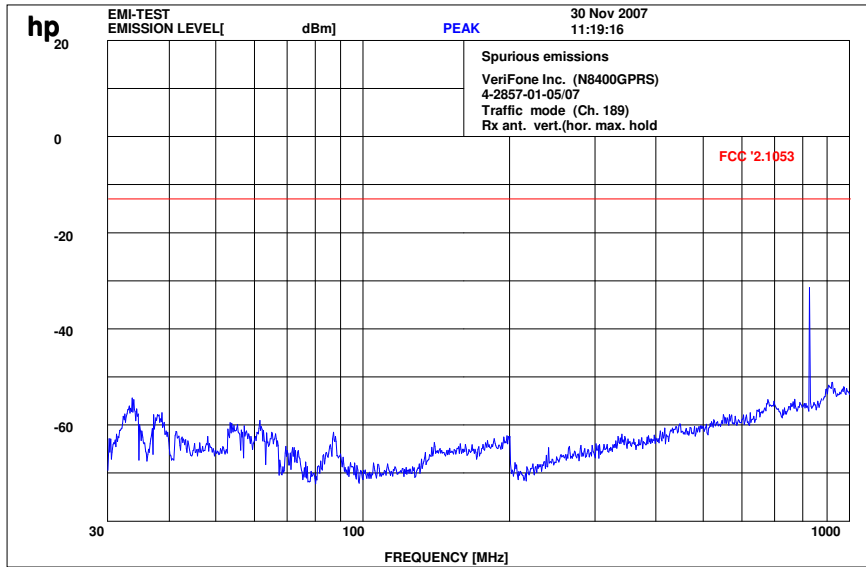

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz  
Carrier suppressed with a rejection filter

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


**Channel 189 (1 GHz - 4 GHz)**

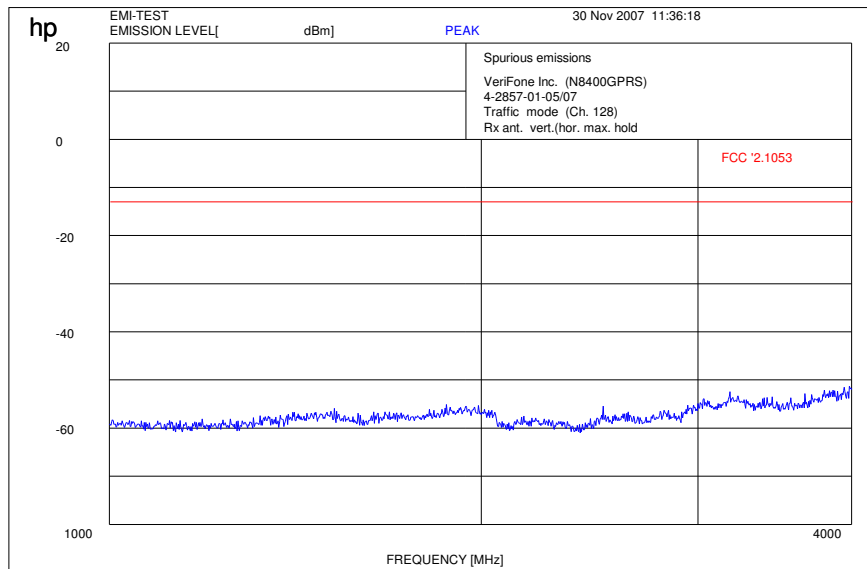

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


Channel 189 (4 GHz – 12.5 GHz)

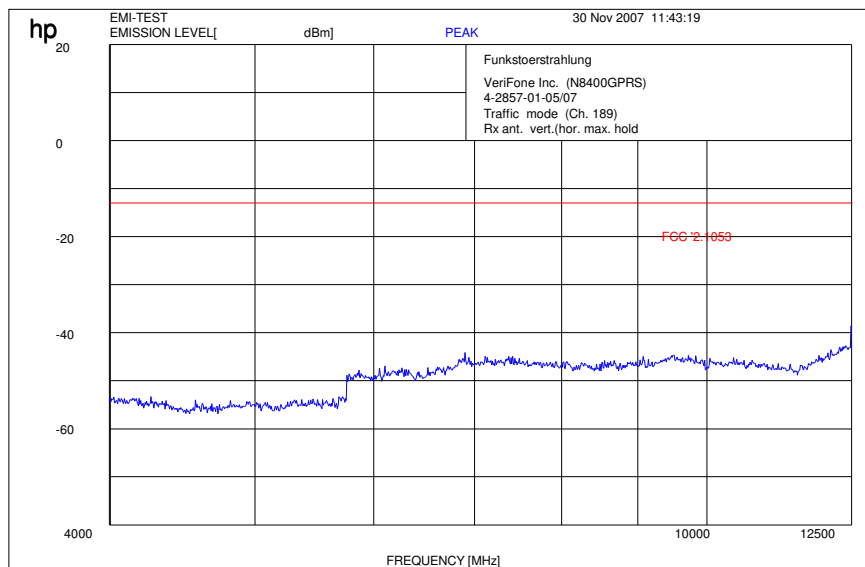

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


**Channel 251 (30 MHz - 1 GHz)**

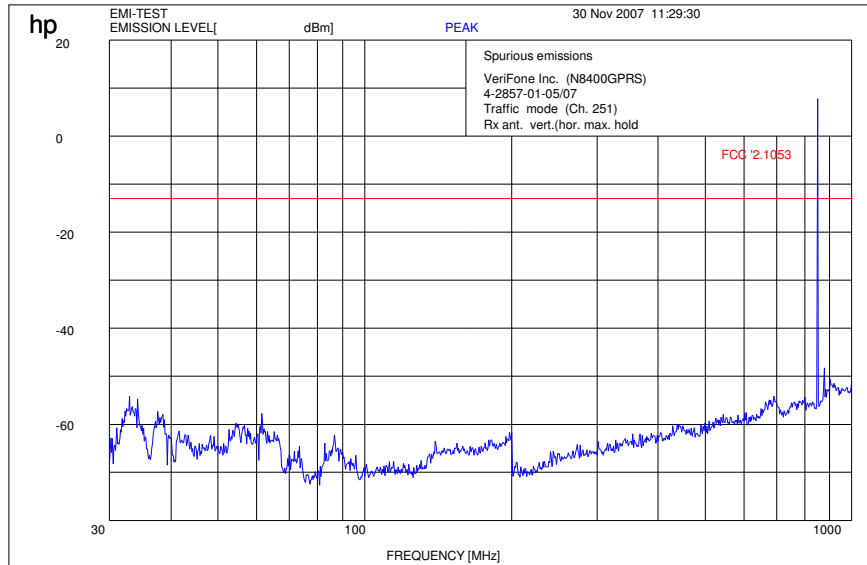

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz  
Carrier suppressed with a rejection filter

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz


**Channel 251 (1 GHz - 4 GHz)**

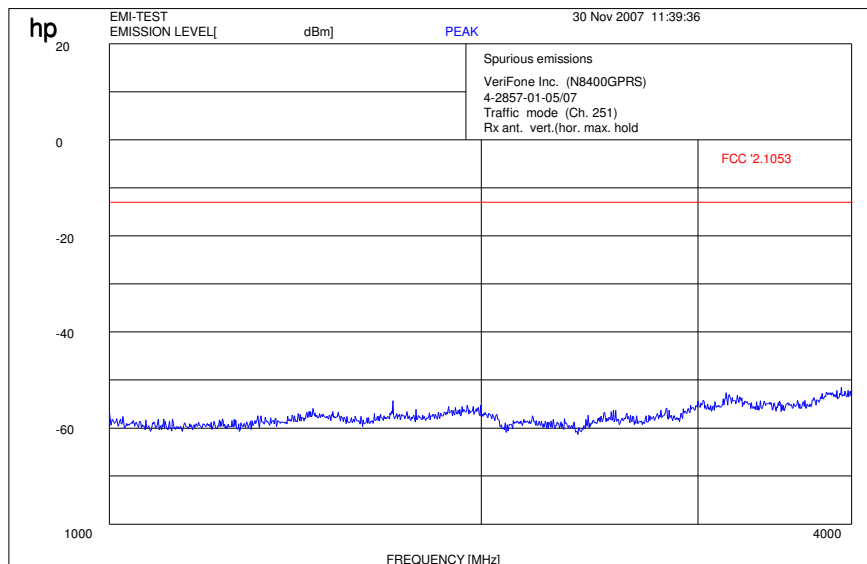

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

**Channel 251 (4 GHz – 12.5 GHz)**

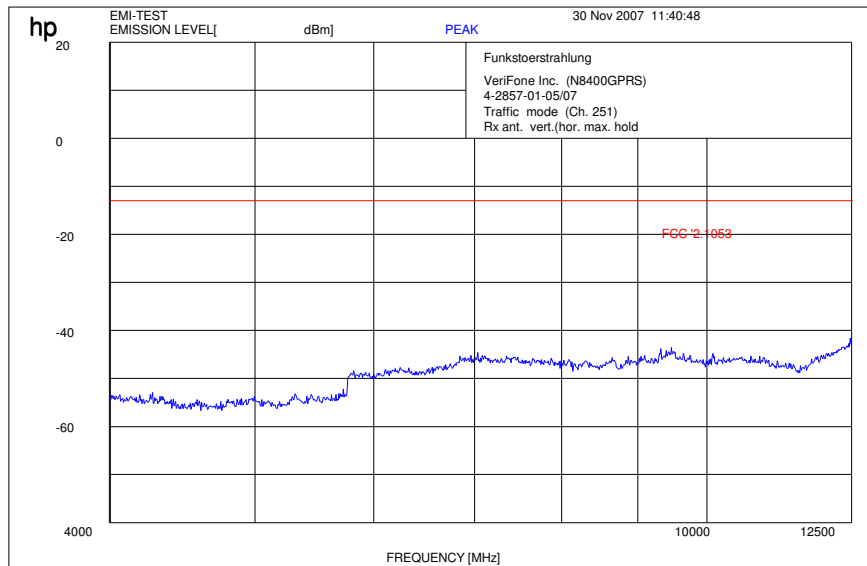

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz



### 5.2.4 Receiver Radiated Emissions

#### Reference

FCC:	CFR Part 15.109, 2.1053
IC:	RSS 132, Issue 2, Section 4.6 and 6.6

SPURIOUS EMISSIONS LEVEL ( $\mu\text{V/m}$ )								
Idle Mode								
f (MHz)	Detector	Level ( $\mu\text{V/m}$ )	f (MHz)	Detector	Level ( $\mu\text{V/m}$ )	f (MHz)	Detector	Level ( $\mu\text{V/m}$ )
No critical peaks detected.			-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
Measurement uncertainty			$\pm 3$ dB					

$f < 1$  GHz : RBW/VBW: 100 kHz

$f \geq 1$ GHz : RBW/VBW: 1 MHz


H = Horizontal; V= Vertical

Measurement distance see table

#### Limits: § 15.109

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3


**Idle Mode (30 MHz - 1 GHz)**

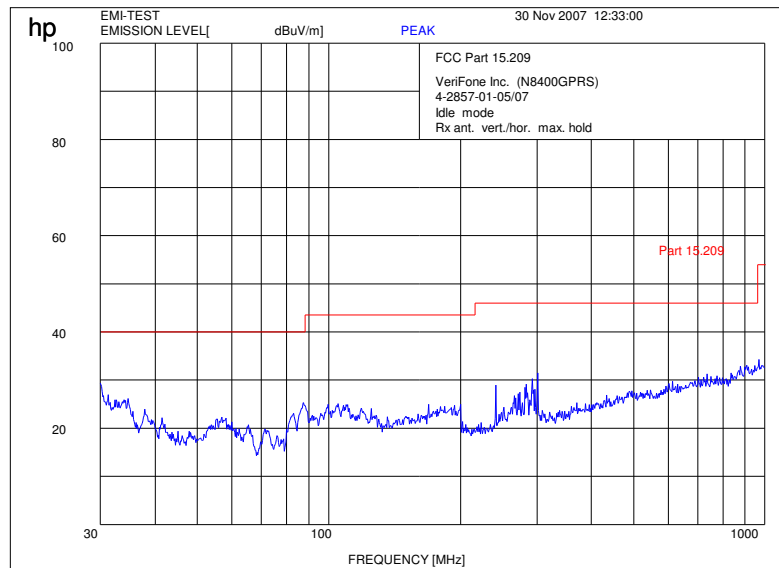

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


**Idle Mode (1 MHz - 4 GHz)**

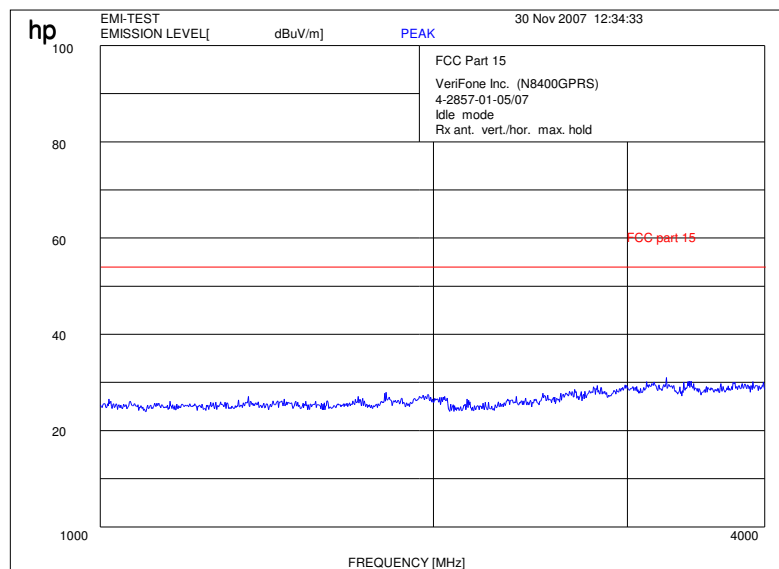

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


**Idle Mode (4 GHz – 12.0 GHz)**

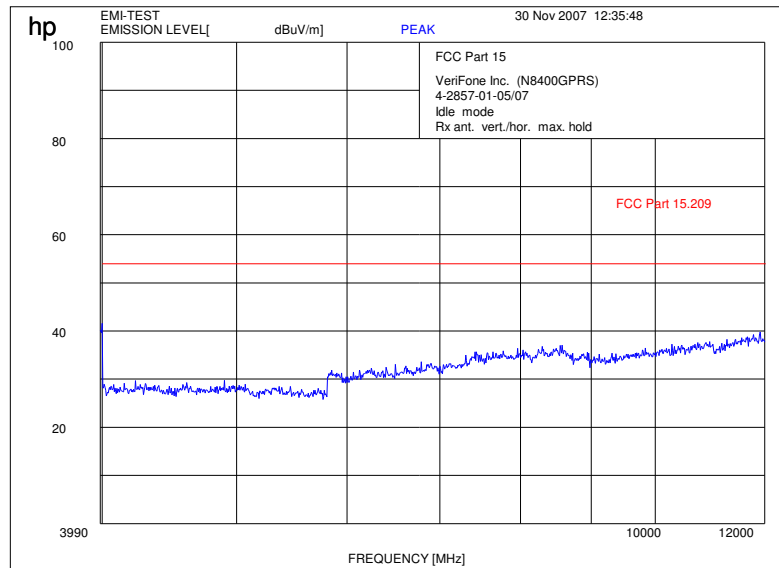

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz

**Idle-Mode (12 GHz - 25 GHz)**

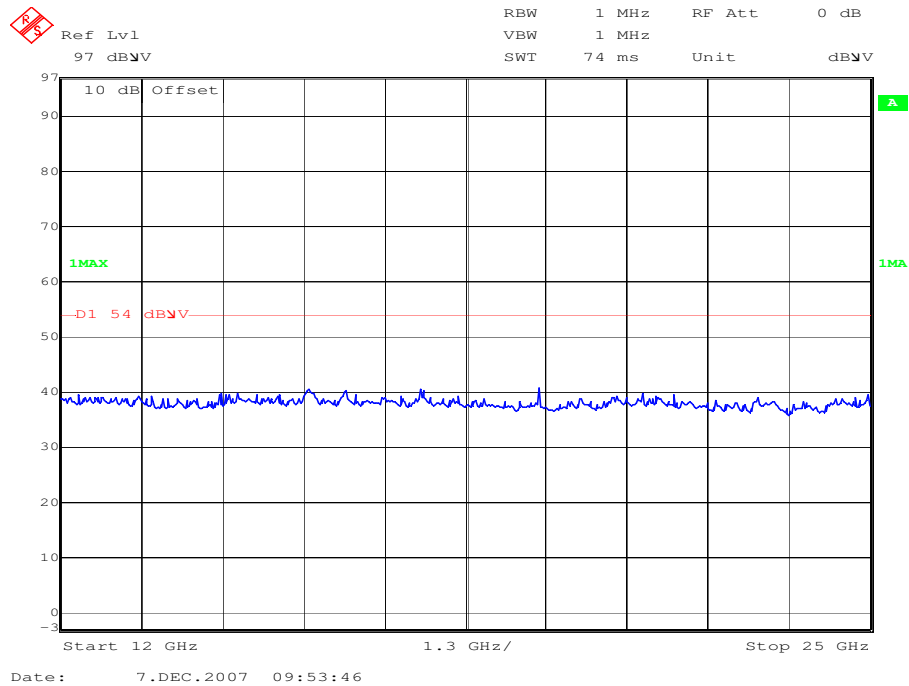

### 5.2.5 Conducted Spurious Emissions

#### Reference

FCC:	CFR Part 22.917, 1.1051
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

#### Measurement Procedure

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency

128 824.2 MHz

189 836.4 MHz

251 848.8 MHz


#### Measurement Limit

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


#### Measurement Results

Harmonic	Tx ch.- 128 Freq. (MHz)	Level (dBm)	Tx ch.- 189 Freq. (MHz)	Level (dBm)	Tx ch.- 251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1672.8	-	1697.6	-
3	2472.6	-	2509.2	-	2546.4	-
4	3296.8	-	3345.6	-	3395.2	-
5	4121.0	-	4182.0	-	4244.0	-
6	4945.2	-	5018.4	-	5092.8	-
7	5769.4	-	5854.8	-	5941.6	-
8	6593.6	-	6691.2	-	6790.4	-
9	7417.8	-	7527.6	-	7639.2	-
10	8242.0	-	8364.0	-	8488.0	-


Channel: 128

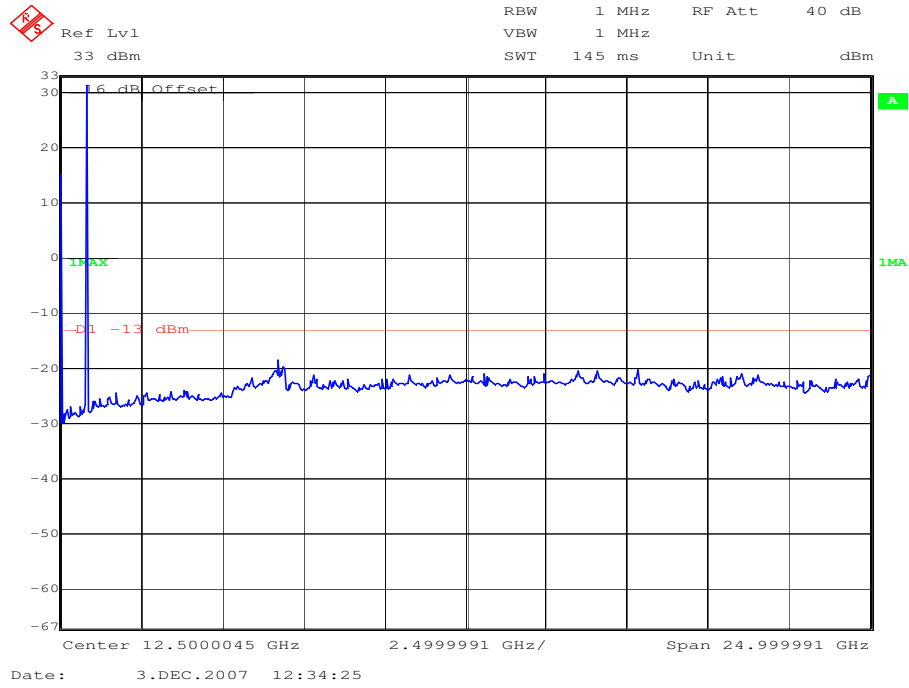

Channel 189

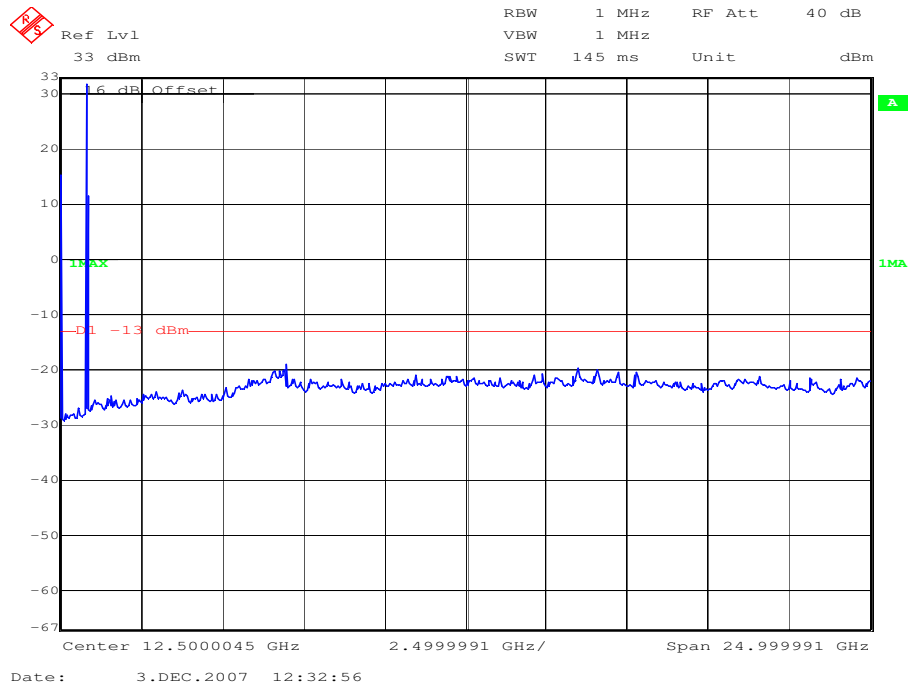

Channel 251

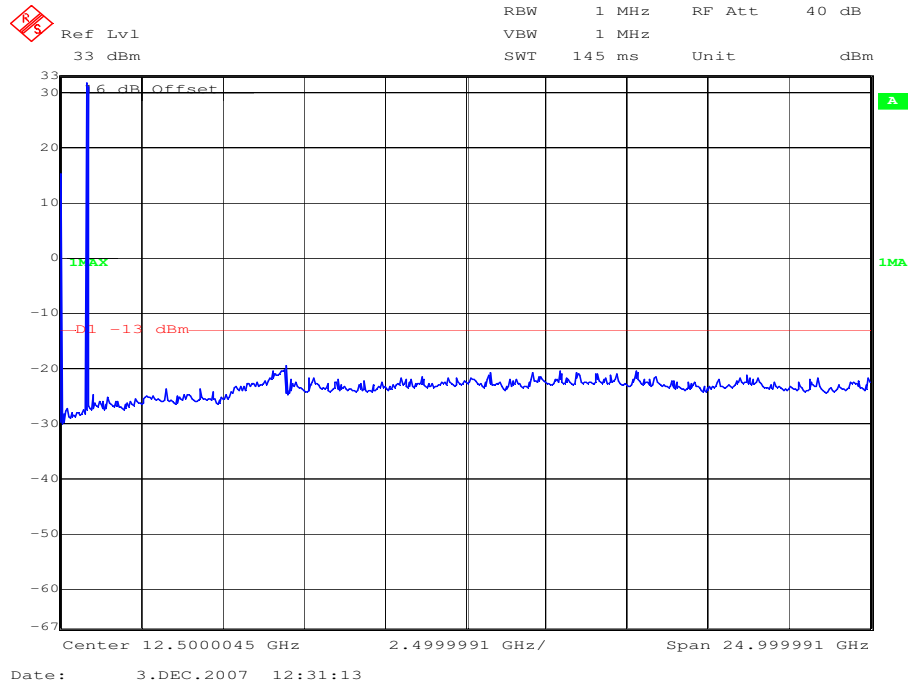



---

**5.2.6 Block Edge Compliance**

**Reference**


FCC:	CFR Part 22.917
IC:	RSS 132, Issue 2, Section 6.5

**Measurement Limit:**

Sec. 22.917(b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

**Block 1 Channel 128**

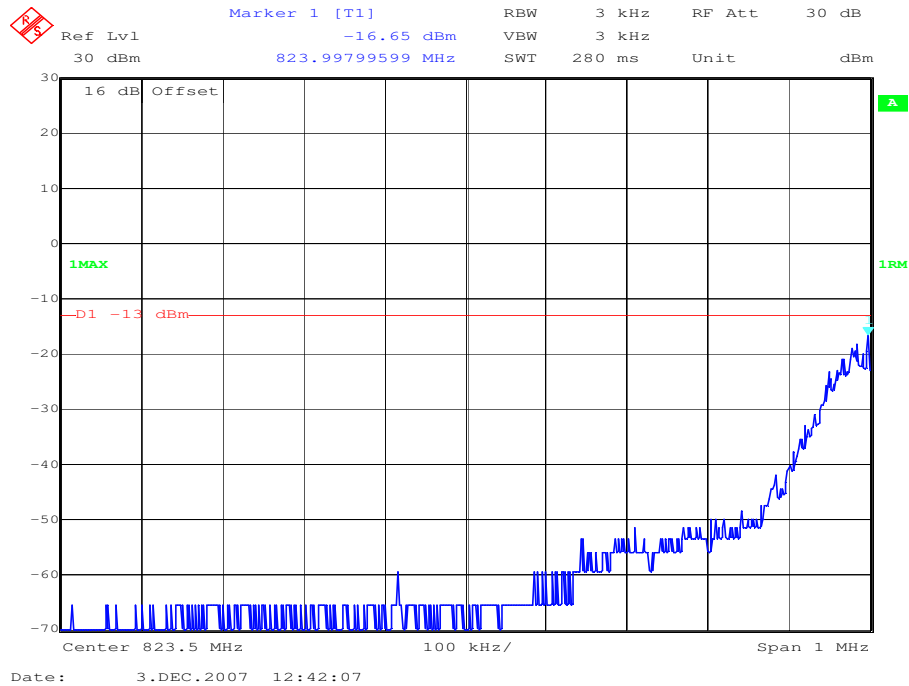

**Block 4 Channel 251**





### 5.2.7 Occupied Bandwidth

#### Reference

FCC:	CFR Part 22.917, 2.1049
IC:	RSS 132, Issue 2, Section 4.2

#### Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.


Normal mode

Frequency	99% Occupied Bandwidth (kHz)	-26 dBc Bandwidth (kHz)
824.2 MHz	280.00	316.03
836.4 MHz	272.02	322.04
848.8 MHz	270.02	312.04

Part 22 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300 kHz, this equates to a resolution bandwidth of at least 3 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.


**Channel 128**

**99% (-20 dB) Occupied Bandwidth**

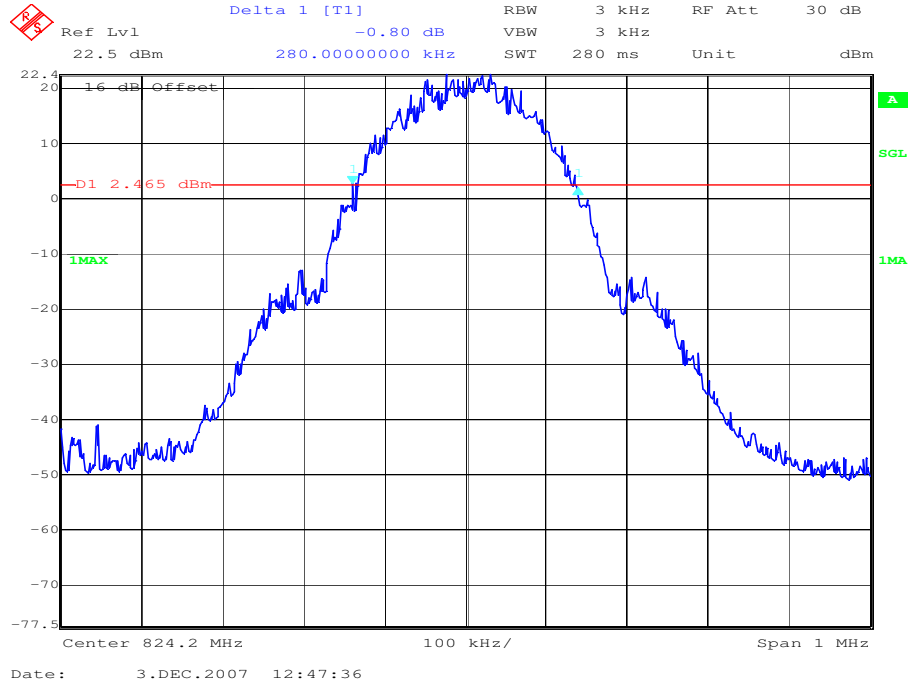


**Channel 128**

**-26 dBc Bandwidth**

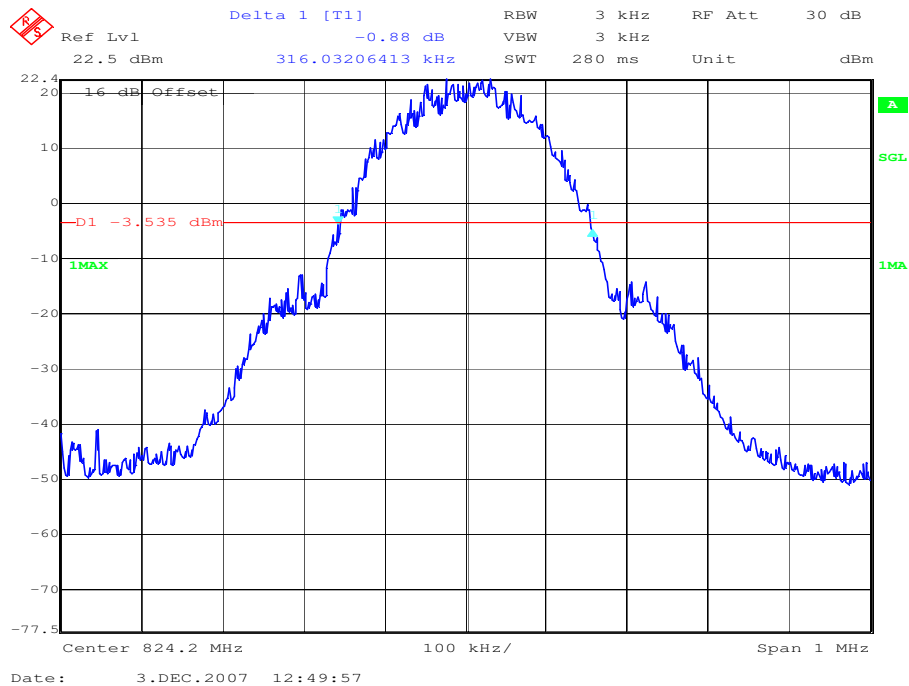


**Channel 189**

**99% (-20 dB) Occupied Bandwidth**

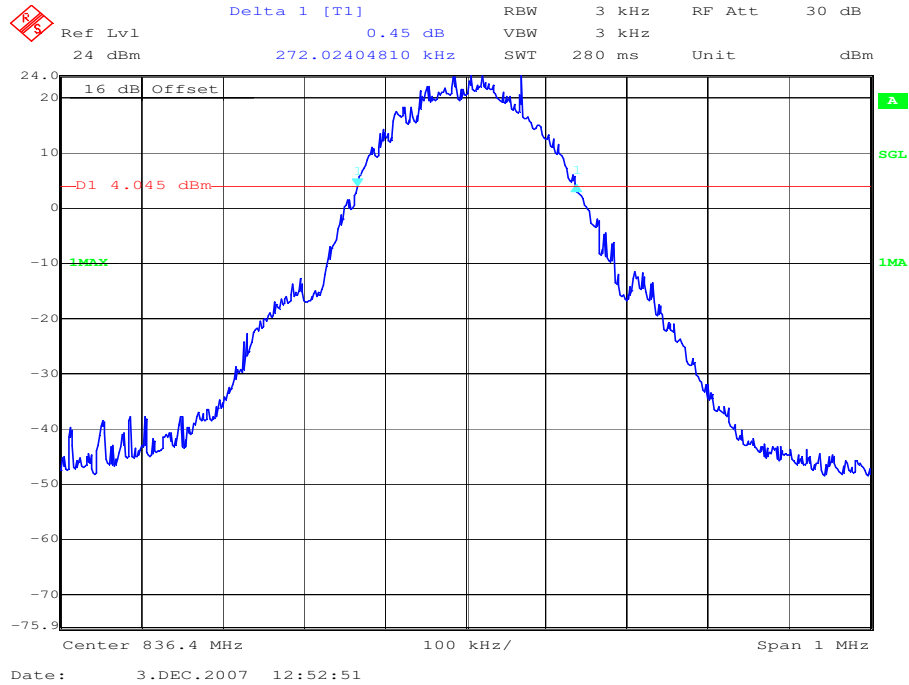


**Channel 189**

**-26 dBc Bandwidth**

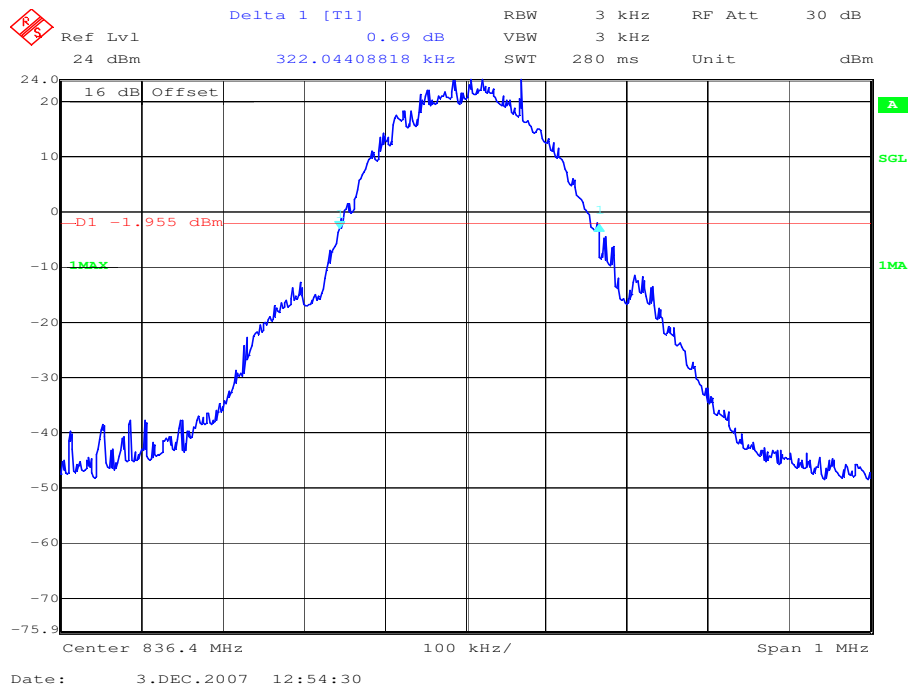


**Channel 251**

**99% (-20 dB) Occupied Bandwidth**

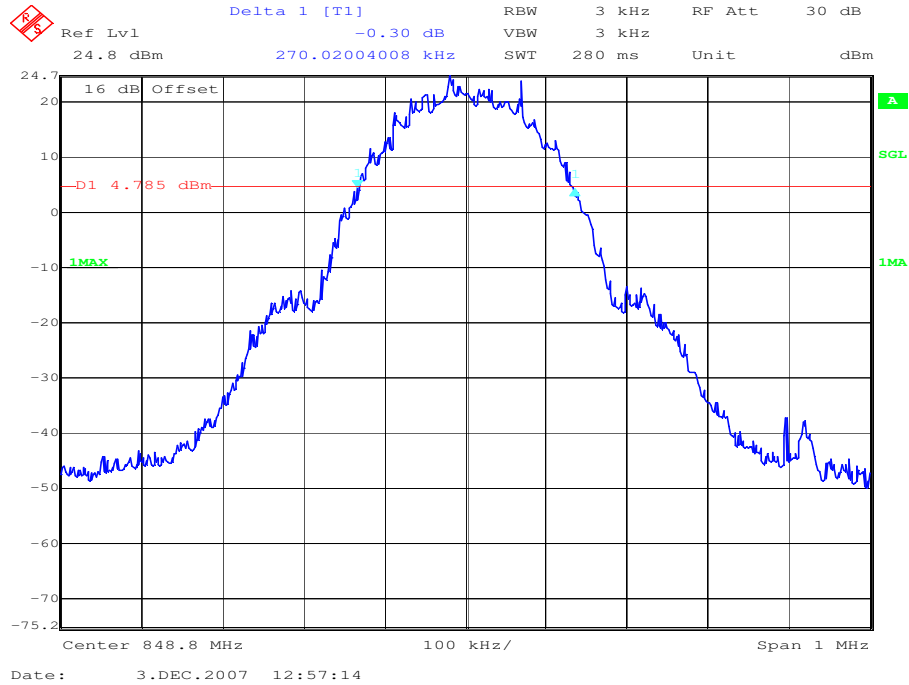

**Channel 251**

**-26 dBc Bandwidth**

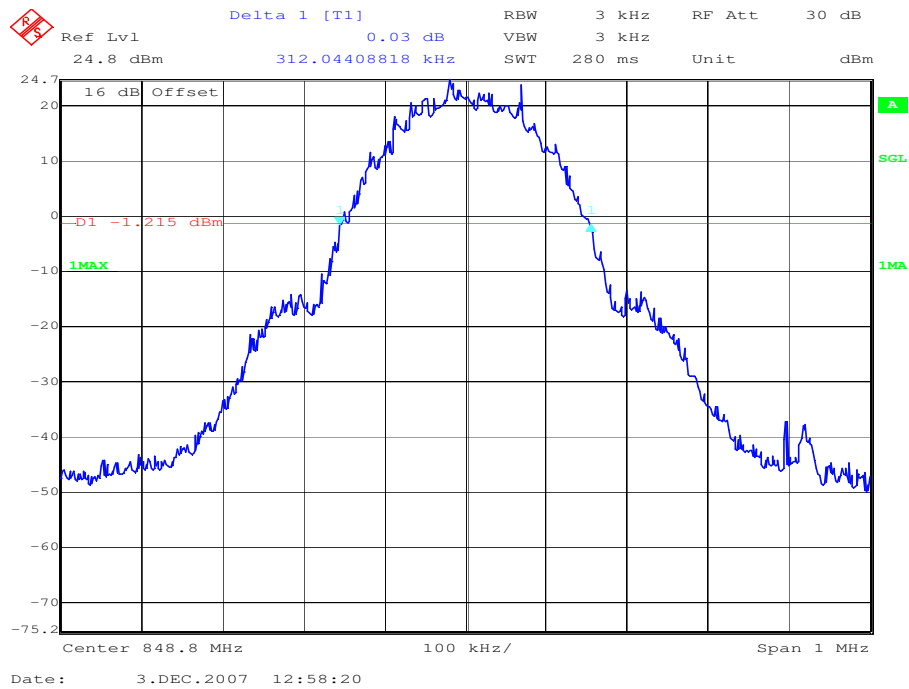

## 6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

### *Anechoic chamber C:*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	Spektrum Analyzer 8566B	HP	2747A05306	300001000	05.10.2006	24	05.10.2008
5	Spektrum Analyzer Display 85662A	HP	2816A16541	300002297	05.10.2006	24	05.10.2008
6	Quasi-Peak-Adapter 85650A	HP	2811A01131	300000999	05.10.2006	24	05.10.2008
7	RF-Preselector 85685A	HP	2837A00779	300000218	08.11.2006	24	08.11.2008
8	PC Vectra VL	HP		300001688	n.a.		
9	Software EMI	HP		300000983	n.a.		
10	Measurement System 2						
11	FSP 30	R&S	100623	ICT 300003464	05.10.2007	24	15.10.2009
12	PC	F+W			n.a.		
13	TILE	TILE			n.a.		
14	Biconical antenna	EMCO	S/N: 860 942/003		Monthly verification (System cal.)		
15	Log. Period. Antenna 3146	EMCO	2130	300001603	Monthly verification (System cal.)		
16	Double Ridged Antenna HP 3115P	EMCO	3088	300001032	Monthly verification (System cal.)		
17	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
18	Power Supply 6032A	HP	2818A03450	300001040	12.05.2007	36	12.05.2010
19	Busisolator	Kontron		300001056	n.a.		
20	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
21	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
22	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
23	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		

*System Rack Room 005 :*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	FSP 30	R&S		300003575	02.04.2007	24	02.04.2009
2	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
3	Switch Matrix	HP		300000929	n.a.		
4	Power Supply	HP	3041A00544	300002270	13.05.2007	36	13.05.2010
5	Signal Generator	R&S	836206/0092	300002680	30.05.2007	36	30.05.2010

*Signalling Units:*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
2	CBT	R&S	100185	300003416	21.02.2006	24	21.02.2008
3	CMU-200	R&S	103992	300003231	27.04.2007	12	27.04.2008
4	CMU-200	R&S	106240	300003321	02.05.2006	24	02.05.2008

*SRD Laboratory Room 002:*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller PSM 12	R&S	835259/007	3000002681-00xx	n.a.		
2	Memory Extension PSM-K10	R&S	To 1	3000002681	n.a.		
3	Operating Software PSM-B2	R&S	To 1	3000002681	n.a.		
4	19" Monitor		22759020-ED	3000002681	n.a.		
5	Mouse		LZE 0095/6639	3000002681	n.a.		
6	Keyboard		G00013834L 461	3000002681	n.a.		
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681-0005	01.08.2006	24	01.08.2008
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681	s.No.7		
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681-0002	01.08.2006	36	01.08.2009
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681	s.No.10		
12	Data Generator SMIQ-B11	R&S	To 10	3000002681	s.No.10		
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681	s.No.10		
14	Fast CPU SM-B50	R&S	To 10	3000002681	s.No.10		
15	FM Modulator SM-B5	R&S	835676/033	3000002681	s.No.10		
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681-0001	01.08.2006	36	01.08.2009
17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681	s.No.16		
18	Data Generator SMIQ-B11	R&S	To 16	3000002681	s.No.16		

19	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681	s.No.16		
20	Fast CPU SM-B50	R&S	To 16	3000002681	s.No.16		
21	FM Modulator SM-B5	R&S	836061/022	3000002681	s.No.16		
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681-0003	01.08.2006	36	01.08.2009
23	Attenuator SMP-B15	R&S	835136/014	3000002681	S.No.22		
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681	S.No.22		
25	Power Meter NRVD	R&S	835430/044	3000002681-0004	01.08.2006	24	01.08.2008
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681-0013	01.08.2006	24	01.08.2008
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681-0010	01.08.2006	24	01.08.2008
28	Rubidium Standard RUB	R&S		3000002681-0009	01.08.2006	24	01.08.2008
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681-0006	01.08.2006	24	01.08.2008
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681-0011	n.a.		
31	19" Rack	R&S	11138363000004	3000002681	n.a.		
32	RF-cable set	R&S	N/A	3000002681	n.a.		
33	IEEE-cables	R&S	N/A	3000002681	n.a.		
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681	s.No.7		
35	RSP programmable attenuator	R&S	834500/010	3000002681-0007	01.08.2006	24	01.08.2008
36	Signalling Unit	R&S	838312/011	3000002681	n.a.		
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681			
38	Climatic box VT 4002	Heraeus Vötsch	58566046820010	300003019	11.05.2007	24	11.05.2009
39	Signaling Unit CMU200	R&S	832221/0055	300002862	12.01.2006	24	12.01.2008
40	Power Splitter 6005-3	Inmet Corp.	none	300002841	23.12.2006	24	23.12.2008
41	SMA Cables SPS-1151-985-SPS	Insulated Wire	different	different	n.a.		
42	CBT32 with EDR Signaling Unit	R&S					
43	Coupling unit	Narda	N/A	--	n.a.		
44	2xSwitch Matrix PSU	R&S	872584/021	300001329	n.a.		
45	RF-cable set	R&S	N/A	different	n.a.		
46	IEEE-cables	R&S	N/A	--	n.a.		

Anmerkung: 3000002681-00xx als Systeme inventarisiert

**SRD Laboratory Room 005:**

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Spektrum Analyzer 8566B	HP	2747A05275	300000219	08.11.2006	24	08.11.2008
2	Spektrum Analyzer Display 85662A	HP	2816A16497	300001690	08.11.2006	24	08.11.2008
3	Quasi-Peak-Adapter 85650A	HP	2811A01135	300000216	08.11.2006	24	08.11.2008
4	Power Supply	Heiden	003202	300001187	12.05.2007	36	12.05.2010
5	Power Supply	Heiden	1701	300001392	12.05.2007	36	12.05.2010

*OTA chamber:*

No	Equipment	Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calib.	Freq. months	Next Calib.
1	Splitter	15542	Mini Circuits	15542	400000086	Verified with path compensation		
2	Splitter	42000	Anaren	4730	400000085	Verified with path compensation		
3	Cable N-Con. 15m	Aircell 7	Aircell	--	400000087	Verified with path compensation		
4	CTIA-Chamber	AMS 8500	ETS-Lindgren	--	300003327-0000	Verified with chamber and ripple tests		
5	CTIA-Chamber - Positioning Equipment	--	EMCO	--	300003328-0000	na		
6	CTIA-Chamber – Software EMQuest	--	EMCO	--	300003328-0001	na		
7	CTIA-Chamber - Antennas	Double Ridged Horn, Dipoles/Loops	EMCO	--	300003328-0002	na		
8	Power supply 0-50V	6633A	HP Meßtechnik	2851A-01222	300001530	12.5.07	24	12.5.09
9	MP5 Five-Beam-Laser	MP5	CST/berger		400000088	na		
10	Mount kit for Laptop	--	EMCO		300003295	na		
15	Antenna for signalling	3102 L Conical log spir	EMCO	40953	300003296	na		
16	Cable SMA-Con. 15m	KK-MF141-15	Huber & Suhner		400000090	Verified with path compensation		
17	Cables	--	Huber & Suhner	different	400000083	Verified with path compensation		
18	Limiting Amplifier	LA 02-801	JCA Tech.	101	300003341	na		
19	Spectrum Analyzer	FSP-7	R&S	100289	300003282	12.5.07	24	12.5.09
20	Switch Unit	TS-RSP	R&S	100155	300003281	Verified with path compensation		
21	Step Attenuator 0 ...139.9 dB	RSP	R&S	860712002	400000079	Verified with path compensation		
22	Signalgenerator	SMIQ03B	R&S	836206 /0091	300002679	1.6.07	36	1.6.10
23	Universal Communication Tester	CMU 200	R&S	106240	300003321	2.5.07	24	2.5.09
24	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000089	27.4.07	12	27.4.08



## 7 Photographs of the Test Set-up

Photo documentation

Photo 1:

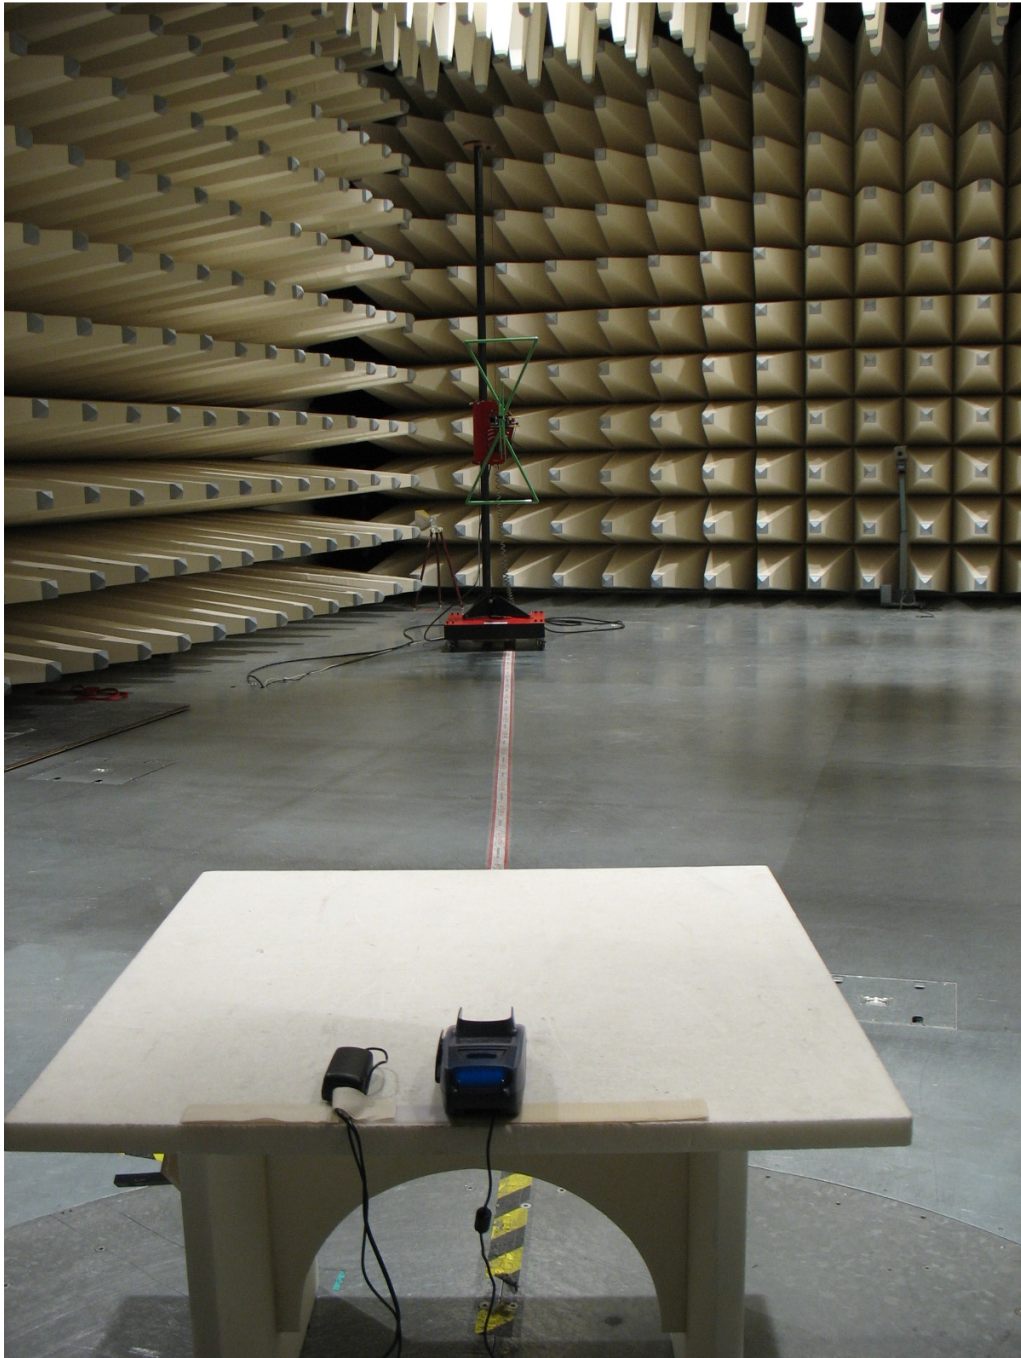


Photo 2:



Photo 3:



Photo 4:

