

## FCC IC Test Report Part 74 & RSS-210

**Report No.:** FCC\_IC\_RF\_SL19101602-BSS-010\_BTR-800 Rev\_1.0

**Product:** UHF Wireless Intercom Base Station

**Models:** BTR-800-FD, BTR-800-FE, BTR-800-HE

**FCC ID:** B5DM543

**IC:** 1321A-BTR800DE

**Received Date:** 12/09/2019

**Test Date:** 01/02/2020-01/19/2020

**Issued Date:** 02/25/2020

**Applicant:** Bosch Security Systems, Inc.

**Applicant Address:** 8601 East Cornhusker Highway, Lincoln, NE 68507 USA

**Manufacturer:** Bosch Security Systems, Inc.

**Manufacturer Address:** 130 Perinton Parkway, Fairport, NY 14450 USA

**Issued By:** Bureau Veritas Consumer Products Services, Inc.

**Lab Address:** 775 Montague Expressway, Milpitas, CA 95035

**FCC Registration /  
Designation Number:** 540430

**ISED# / CAB identifier:** 4842D



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

## TABLE OF CONTENTS

Release Control Record .....	4
1 Certificate Of Conformity .....	5
2 Summary Of Test Results .....	6
2.1 Measurement Uncertainty .....	7
3 General Information .....	8
3.1 General Description Of Eut.....	8
3.2 Description Of Test Modes .....	9
3.2.1 General Description Of Applied Standards .....	10
3.3 Description Of Support Units .....	10
3.3.1 Configuration Of System Under Test .....	11
4 Test Types And Results .....	12
4.1 Output Power Measurement.....	12
4.1.1 Limits Of Output Power Measurement.....	12
4.1.2 Test Instruments.....	12
4.1.3 Test Procedures .....	12
4.1.4 Test Setup .....	13
4.1.5 Eut Operating Conditions .....	13
4.1.6 Test Results .....	14
4.2 Frequency Stability Measurement .....	15
4.2.1 Limits Of Frequency Stability Measurement .....	15
4.2.2 Test Instruments.....	15
4.2.3 Test Procedure.....	16
4.2.4 Test Setup .....	16
4.2.5 Test Results .....	17
4.3 Modulation Deviation Measurement .....	19
4.3.1 Limits Of Modulation Deviation Measurement .....	19
4.3.2 Test Instruments.....	19
4.3.3 Test Procedure.....	20
4.3.4 Test Setup .....	21
4.3.5 Test Results .....	22
4.4 Occupied Bandwidth And Emission Mask Measurement .....	26
4.4.1 Limits Of Occupied Bandwidth And Emission Mask Measurement .....	26
4.4.2 Test Instruments.....	26
4.4.3 Test Setup .....	27
4.4.4 Test Procedures .....	28
4.4.5 Test Results .....	29
4.5 Conducted Spurious Emissions.....	33
4.5.1 Limits Of Conducted Spurious Emissions Measurement .....	33
4.5.2 Test Instruments.....	33
4.5.3 Test Procedure.....	34
4.5.4 Test Setup .....	34
4.5.5 Eut Operating Conditions .....	34
4.5.6 Test Results .....	35

4.6	Radiated Emission Measurement.....	37
4.6.1	Limits Of Radiated Emission Measurement.....	37
4.6.2	Test Instruments.....	38
4.6.3	Test Procedures.....	39
4.6.4	Deviation From Test Standard.....	39
4.6.5	Test Setup.....	40
4.6.6	Eut Operating Conditions.....	40
4.6.7	Test Results.....	41
7	Photographs Of The Test Configuration.....	45
8	Information Of The Testing Laboratories.....	46

## Release Control Record

Issue No.	Reason for change	Date issued
FCC_IC_RF_SL19101602-BSS-010_BTR-800	Original release	02/11/2020
FCC_IC_RF_SL19101602-BSS-010_BTR-800 Rev_1.0	Update Applicant & Manufacturer Address Per Customer Review	02/25/2020

## 1 Certificate of Conformity

**Product:** UHF Wireless Intercom Base Station  
**Brand:** RTS  
**Models:** BTR-800-FD, BTR-800-FE, BTR-800-HE  
**Series Model:** N/A  
**Sample Status:** Engineering sample  
**Applicant:** Bosch Security Systems, Inc.  
**Test standards:** FCC 47 CFR Part 74  
RSS-210 Issue 10 December 2019

The above equipment has been tested by **Bureau Veritas Consumer Products Services, Inc., Milpitas Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & equipment under test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by** : Deon , **Date:** 02/25/2020  
Deon Dai / Test Engineer

**Approved by** : Chen Ge , **Date:** 02/25/2020  
Chen Ge / Engineer Reviewer

## 2 Summary of test results

The EUT has been tested according to the following specifications:

<b>Applied standard: FCC Part74 &amp; Part 2 RSS-210 Annex G</b>			
<b>Standard section</b>	<b>Test type and limit</b>	<b>Result</b>	<b>Remark</b>
2.1046 74.861 RSS-210 G.1	RF Power Output	Pass	Meet the requirement of limit.
2.1055 74.861 RSS-210 G.3	Frequency Stability	Pass	Meet the requirement of limit.
2.1047 74.861 RSS-210 G.5	Modulation Deviation	Pass	Meet the requirement of limit.
2.1047 RSS-210 G.5	Audio Frequency Response	Pass	Meet the requirement of limit.
2.1049 74.861 RSS-210 G.2	Occupied Bandwidth	Pass	Meet the requirement of limit.
2.1051 74.861 RSS-210 G.4	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1051 74.861 RSS-210 G.4	Radiated Spurious Emissions	Pass	Meet the requirement of limit.

## 2.1 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty ( $k=2$ ) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.51dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.73dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.64dB
	6GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	4.91dB

### 3 General Information

#### 3.1 General description of EUT

Product	UHF Wireless Intercom Base Station
Brand	RTS
Models	BTR-800-FD, BTR-800-FE, BTR-800-HE
FCC ID	B5DM543
IC	1321A-BTR800DE
Power Supply	100~240 Vac, 1A, 50~60Hz
Modulation	FM
Operating Frequency	BTR-800 Band FD: TX:482.1-499.9MHz RX:572.1-589.9MHz BTR-800 Band HE: TX:500.1-517.9MHz RX:590.1-607.9MHz
Channel Bandwidth	100kHz
Max. Conducted power	BTR-800 Band F: 22.23 dBm BTR-800 Band H: 22.47 dBm
Antenna type	Dipole Antenna
Antenna gain	0.5dBi
Associated Devices	N/A

**Note:**

1. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3.2 Description of test modes

The following channels have been tested and presented.

BTR-800 FD Band		BTR-800 HE Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low	482.1	Low	500.1
Middle	491.0	Middle	509.0
High	499.9	High	517.9

### 3.2.1 General Description of Applied Standards

The EUT has RF transmitter and receiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR part 2**  
**FCC 47 CFR part 74**  
**RSS-210 Issue 10 December 2019**  
**ANIS/TIA/EIA-603-e 2016**  
**ANSI 63.26-2015**

All test items have been performed and recorded as per the above standards.

### 3.3 Description of support units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model no.	Serial no.	Fcc id
1					
2					
3					
4					
5					
6					

No.	Signal cable description of the above support units
1	
2	
3	
4	
5	
6	

**Note:** all power cords of the above support units are Non-shielded (1.8m).

### 3.3.1 Configuration of system under test

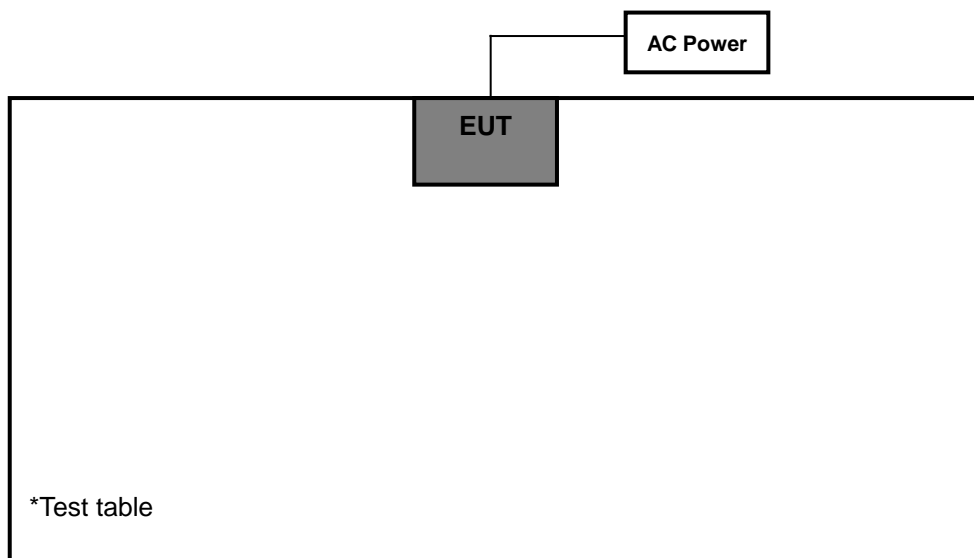

## 4 Test types and results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of output power measurement

LPAS operation in TV bands	
Frequency Band	Conducted Output Power
54 – 72MHz 76 – 88MHz 174 – 216MHz	50mW (17dBm) EIRP
470 – 608 614 - 698	250mW (24dBm)

LPAS operation in other than TV bands	
Conducted Power (W)	
	1

#### 4.1.2 Test instruments

##### For conducted power:


Description & manufacturer	Model no.	Serial no.	Calibrated date	Calibrated until
USB Power Sensor	7002-006	159814	03/18/2019	03/18/2020
30dB Attenuation	VAT-30W2	N/A	N/A	N/A

#### 4.1.3 Test procedures

The transmitter output was connected to power meter through an attenuator. The test result was measured and recorded.

#### 4.1.4 Test setup

Conducted power measurement:

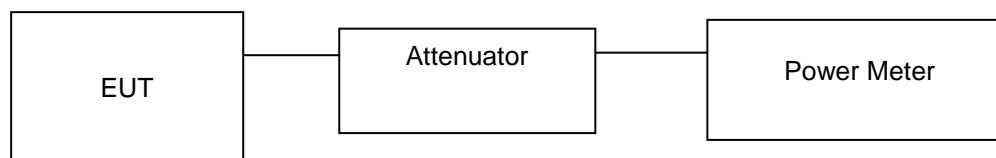

#### 4.1.5 EUT operating conditions

- a. Placed the EUT on the testing table.
- b. Turn on the EUT power by battery.
- c. Enable EUT under transmission condition continuously at specific channel frequency.

#### 4.1.6 Test results

Band	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)
BTR-800 FD	482.1	20.07	101.62	250
	491	20.12	102.80	250
	499.9	20.23	105.44	250
BTR-800 HE	500.1	20.11	102.57	250
	509	20.38	109.14	250
	517.9	20.47	111.43	250

#### IC

Band	Frequency (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP Limit (mW)
BTR-800 FD	482.1	20.07	0.5	114.02	250
	491	20.12	0.5	115.35	250
	499.9	20.23	0.5	118.30	250
BTR-800 HE	500.1	20.11	0.5	115.08	250
	509	20.38	0.5	122.46	250
	517.9	20.47	0.5	125.03	250

Note: The antennas are sleeve dipole antennas. By itself, it has a gain of 2 dBi. However they are not matched to 50 Ohms which is the impedance of the TNC jack/coaxial cable. These antennas naturally have a lot higher impedance than 50 Ohms. The dipole antenna over the range 482 – 518 MHz has about a 2.5 to 1 VSWR match. So about 1dB is loss in matching and another 0.5 due to losses at UHF. So effectively the antenna when combined with the device is about a **0.5 dBi** gain antenna.

## 4.2 Frequency stability measurement

### 4.2.1 Limits of frequency stability measurement

Frequency stability	Limit
Refer as FCC 74.861 (e)(4) RSS-210 G.3	0.005%

According to the FCC part 2.1055 shall be tested the frequency stability. The test extreme voltage is according to the 2.1055(d)(1) vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -30°C ~ 50°C.


### 4.2.2 Test instruments

Description & manufacturer	Model no.	Serial no.	Calibrated date	Calibrated until
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140597	06/05/2019	06/05/2020
Temperature/Humidity Chamber	1007H	61201	12/16/2019	12/16/2020

#### 4.2.3 Test procedure

- a. Turn on EUT and set spectrum analyzer center frequency to the EUT operating frequency. Set spectrum analyzer Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1 kHz AND Frequency Span to 50 kHz, Record this frequency as reference frequency.
- b. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber. Turn the EUT on and measure the EUT operating frequency.
- c. Repeat set 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured. Record all measured frequencies on each temperature step.
- d. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

#### 4.2.4 Test setup

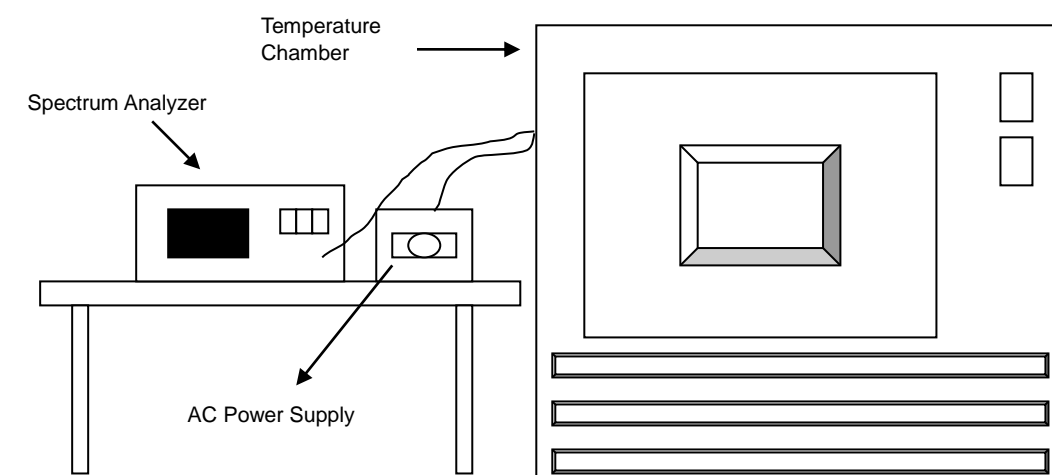



#### 4.2.5 Test results

BTR-800 FD:

Mode	Middle channel 491(MHz)	Input power	120Vac, 60Hz
Environmental conditions	20°C, 60%rh	Tested by	Deon Dai

Frequency error vs. Voltage								
Voltage (volts)	0minutes		2minutes		5minutes		10minutes	
	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)
138	490.9989	-0.00022	490.9982	-0.00037	491.0003	0.00006	491.0006	0.00012
120	491.0017	0.00035	491.0003	0.00006	491.0006	0.00012	490.9989	-0.00022
102	490.9991	-0.00018	491.0007	0.00014	490.9988	-0.00024	491.0004	0.00008

Frequency error vs. Temp								
Temp (°C)	0minutes		2minutes		5minutes		10minutes	
	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)
50	491.0013	0.00026	490.9981	-0.00039	491.0004	0.00008	491.0002	0.00004
40	490.9982	-0.00037	491.0004	0.00008	491.0009	0.00018	491.0006	0.00012
30	491.0009	0.00018	491.0006	0.00012	491.0009	0.00018	491.0006	0.00012
20	491.0013	0.00026	491.0002	0.00004	490.9988	-0.00024	490.9981	-0.00039
10	491.0004	0.00008	490.9989	-0.00022	491.0014	0.00029	491.0013	0.00026
0	491.0014	0.00029	491.0007	0.00014	490.9988	-0.00024	491.0008	0.00016
-10	491.0002	0.00004	491.0003	0.00006	491.0014	0.00029	491.0008	0.00016
-20	490.9997	-0.00006	490.9982	-0.00037	490.9998	-0.00004	491.0005	0.00010
-30	491.0009	0.00018	490.9989	-0.00022	491.0012	0.00024	491.0002	0.00004

**BTR-800 HE:**

Mode	Middle channel 509(MHz)	Input power	120Vac, 60Hz
Environmental conditions	20°C, 60%rh	Tested by	Deon Dai

Frequency error vs. Voltage								
Voltage (volts)	0minutes		2minutes		5minutes		10minutes	
	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)
138	508.9994	-0.00012	509.0012	0.00024	509.0002	0.00004	508.9991	-0.00018
120	509.0012	0.00024	509.0011	0.00022	509.0014	0.00028	509.0002	0.00004
102	509.0011	0.00022	508.9989	-0.00022	509.0003	0.00006	509.0009	0.00018

Frequency error vs. Temp								
Temp (°C)	0minutes		2minutes		5minutes		10minutes	
	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)	Frequency (MHz)	(%)
50	509.0015	0.00029	508.9981	-0.00037	509.0009	0.00018	509.0008	0.00016
40	509.0009	0.00018	509.0009	0.00018	508.9988	-0.00024	509.0001	0.00002
30	509.0007	0.00014	509.0006	0.00012	509.0009	0.00018	509.0008	0.00016
20	508.9981	-0.00037	509.0009	0.00018	509	0.00000	509.0005	0.00010
10	509.0008	0.00016	508.9981	-0.00037	509.0002	0.00004	508.9982	-0.00035
0	509.0009	0.00018	509.0009	0.00018	508.9982	-0.00035	509.0009	0.00018
-10	509.0001	0.00002	509.0008	0.00016	509.0012	0.00024	509.0008	0.00016
-20	509.0009	0.00018	509.0009	0.00018	509.0009	0.00018	509.0006	0.00012
-30	509.0003	0.00006	509.0014	0.00028	509.0003	0.00006	508.9991	-0.00018

### 4.3 Modulation Deviation measurement

#### 4.3.1 Limits of modulation Deviation measurement

Modulation Deviation	Limit
Refer as FCC 74.861 (e) (3) RSS-210 G.5	±75 kHz

#### 4.3.2 Test instruments

Description & manufacturer	Model no.	Serial no.	Calibrated date	Calibrated until
Modulation Analyzer	8901B	3226A04414	04/23/2019	04/23/2020
Function/Arbitrary Waveform Generator	33220A	MY44016131	03/11/2019	03/11/2020
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140597	06/05/2019	06/05/2020

### 4.3.3 Test procedure

#### Audio frequency response

- a) Connect the equipment as illustrated.
- b) Set the test receiver to measure peak position deviation. Set the audio bandwidth for  $\leq 50$  Hz to  $\geq 15000$  Hz. Turn the de-emphasis function off.
- c) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- d) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- e) Set the test receiver to measure rms deviation and record the deviation reading as  $DEV_{REF}$ .
- f) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- g) Record the test receiver deviation reading as  $DEV_{FREQ}$ .
- h) Calculate the audio frequency response at the present frequency as follows:


$$\text{audio frequency response} = 20 \log_{10} \left( \frac{DEV_{FREQ}}{DEV_{REF}} \right)$$

- i) Repeat step f) through step h) for all the desired test frequencies.

#### Modulation limiting

- a) Connect the equipment as illustrated.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for  $\leq 0.25$  Hz to 15000 Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation. This is the 0 dB reference level.
- e) Increase the level from the audio generator by 20 dB in 5 dB increments recording the deviation as measured from the test receiver in each step. Verify that the audio level used to make the OBW measurement is included in the sweep.
- f) Repeat for step e) at 300 Hz, 2500 Hz and 3000 Hz at a minimum using the 0 dB reference level obtained in step d).
- g) Set the test receiver to measure peak negative deviation and repeat step d) through step f).
- h) The values recorded in step f) and step g) are the modulation limiting.

#### 4.3.4 Test setup

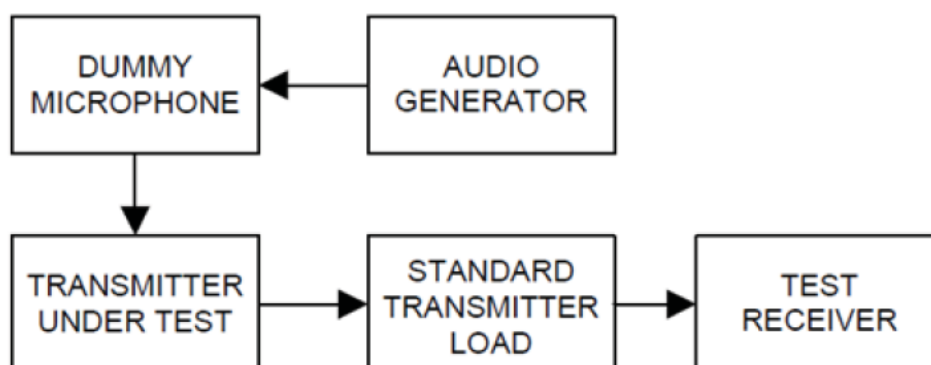


#### 4.3.5 Test results

##### Modulation Limit

BTR-800 FD

Carrier Frequency: 491 MHz

Modulation Level (dB)	Peak freq. Deviation (kHz)				Limit (kHz)
	300Hz	1000Hz	2500Hz	3000Hz	
-20	28.5	29.5	30.9	34.3	± 75
-15	29.5	30.3	31.3	34.4	± 75
-10	31.1	30.8	32.5	35.7	± 75
-5	31.5	34.2	34.6	35.9	± 75
0	35.8	42.3	44.9	50.7	± 75
5	47.4	57.9	57.4	60.6	± 75
10	57.6	59.3	58.4	63.3	± 75
15	61.1	62.7	59.9	64.6	± 75
20	63.8	64.2	63.7	65.4	± 75

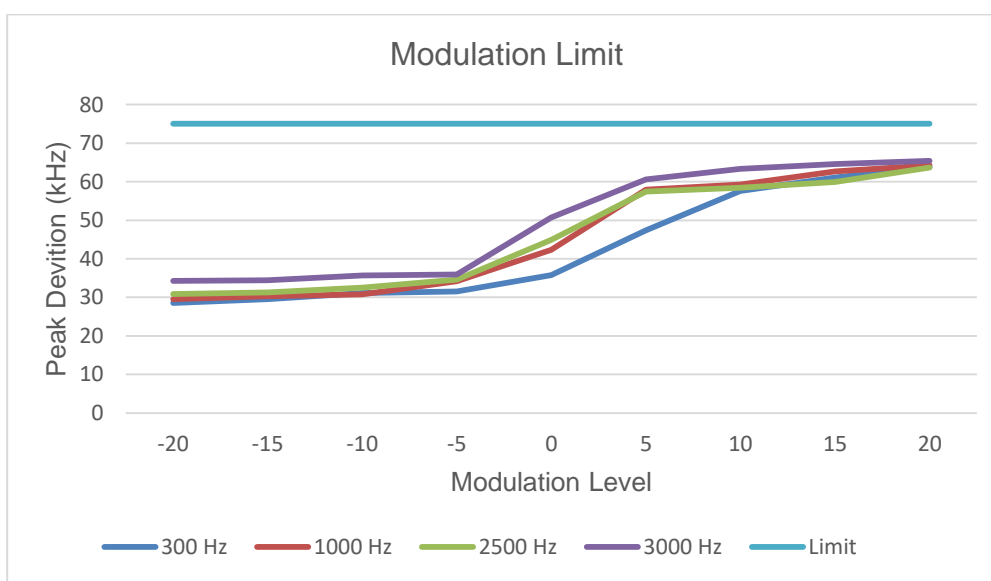

Audio Frequency Response (Middle Channel)

Modulation Frequency (Hz)	Input Level (mw)	Audio Frequency Response (dB)
100	25.39	1.51
300	24.27	1.12
500	22.18	0.34
700	21.47	0.06
1000	21.33	0.00
1500	19.02	-1.00
2000	16.47	-2.25
2500	14.2	-3.53
3500	12.34	-4.75
5000	11.03	-5.73


Note: AF Response =  $20 \cdot \log(\text{AF Level} / \text{AF Level of 1 kHz})$

Modulation Limit

BTR-800 HE

Carrier Frequency: 509 MHz

Modulation Level (dB)	Peak freq. Deviation (kHz)				Limit (kHz)
	300Hz	1000Hz	2500Hz	3000Hz	
-20	24.8	28.8	32.9	33.7	± 75
-15	26.1	29.7	33.2	34.6	± 75
-10	27.5	30.4	33.6	35.5	± 75
-5	28.9	33.4	35.6	36.1	± 75
0	32.3	41.5	44.6	50.1	± 75
5	44.7	56.7	56.7	59.7	± 75
10	55.4	59.4	59.9	61.7	± 75
15	59.9	63.9	63.5	63.9	± 75
20	62.2	65.3	66.3	65.4	± 75

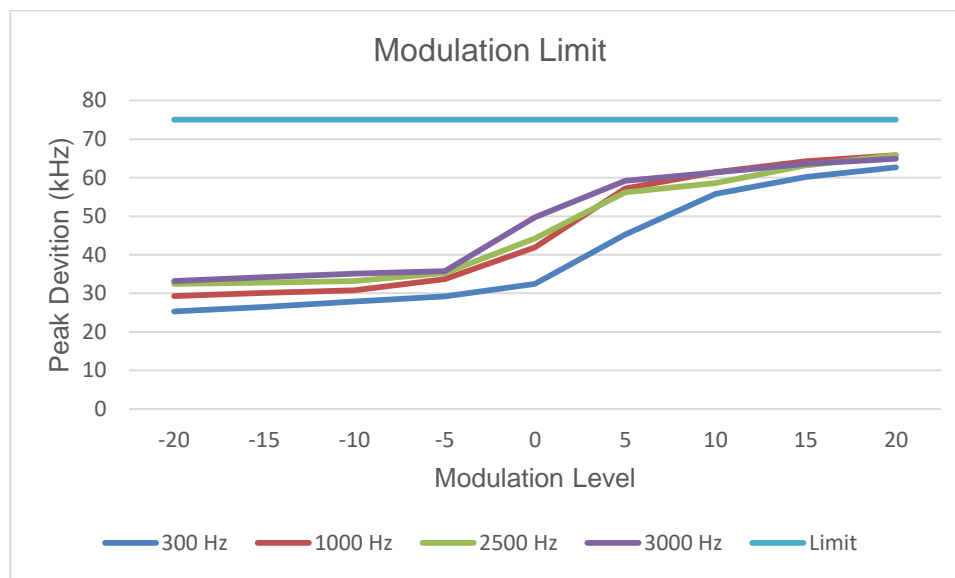



Audio Frequency Response (Middle Channel)

Modulation Frequency (Hz)	Input Level (mw)	Audio Frequency Response (dB)
100	25.93	1.84
300	24.11	1.21
500	22.98	0.79
700	21.37	0.16
1000	20.98	0.00
1500	18.98	-0.87
2000	16.79	-1.94
2500	14.28	-3.34
3500	12.09	-4.79
5000	11.28	-5.39

Note: AF Response =  $20 \cdot \log(\text{AF Level} / \text{AF Level of 1 kHz})$

## 4.4 Occupied bandwidth and emission Mask measurement

### 4.4.1 Limits of occupied bandwidth and emission Mask measurement

According to FCC 74.861 (e) (3) any form of modulation may be used. A maximum deviation of  $\pm 75$  kHz is permitted when frequency modulation is employed.


(5) The operating bandwidth shall not exceed 200 kHz.

(7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter;

### 4.4.2 Test instruments

Description & manufacturer	Model no.	Serial no.	Calibrated date	Calibrated until
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140597	06/05/2019	06/05/2020
Function/Arbitrary Waveform Generator	33220A	MY44016131	03/10/2019	03/10/2020
30dB Attenuation	VAT-30W2	N/A	N/A	N/A

#### 4.4.3 Test setup

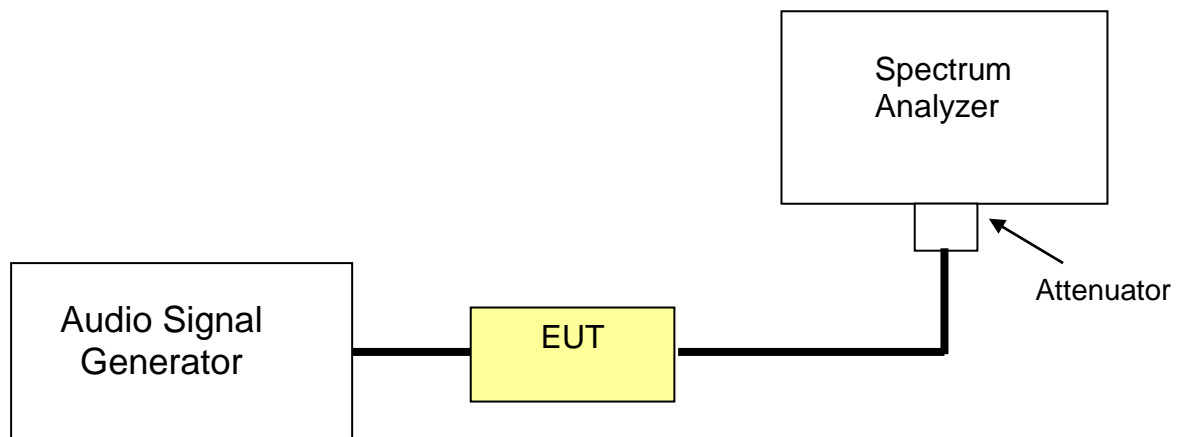

#### 4.4.4 Test procedures


The OBW is according to KDB 971168 D01v03r01

The Emission Mask is according to section 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08).

#### 4.4.5 Test results


Band	Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
BTR-800 FD	482.1	82.43	200	Pass
	491	90.17	200	Pass
	499.9	95.95	200	Pass
BTR-800 HE	500.1	83.79	200	Pass
	509	86.41	200	Pass
	517.9	89.72	200	Pass

## Bandwidth Test Plots

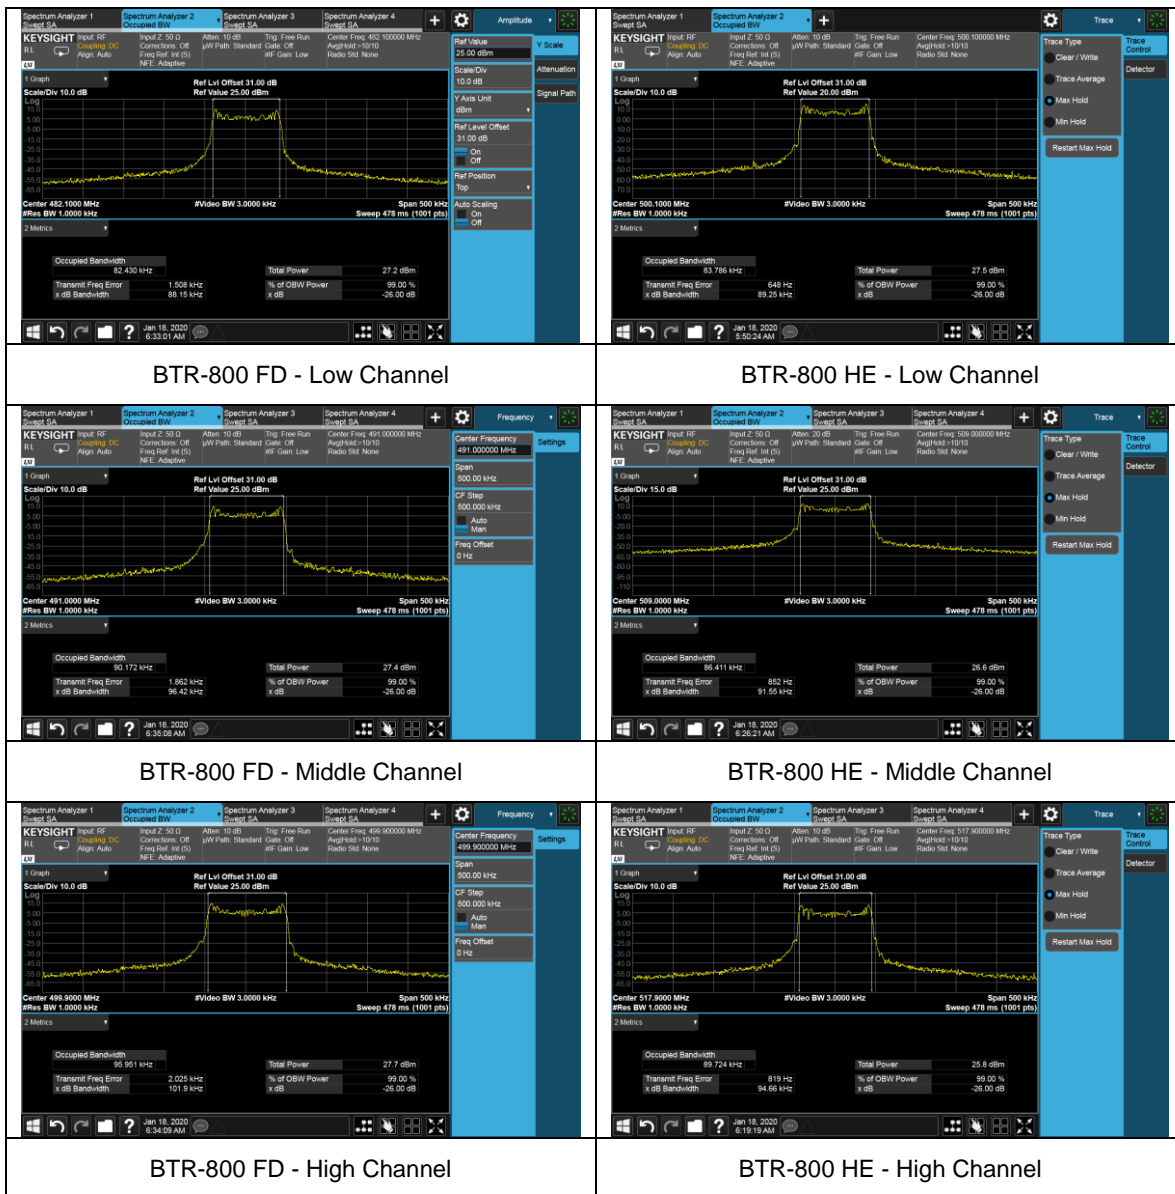


# Emission Mask Test Plots


## BTR-800 FD:

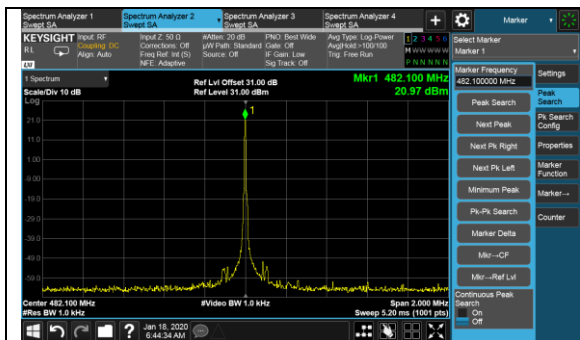


Low Channel, Reference

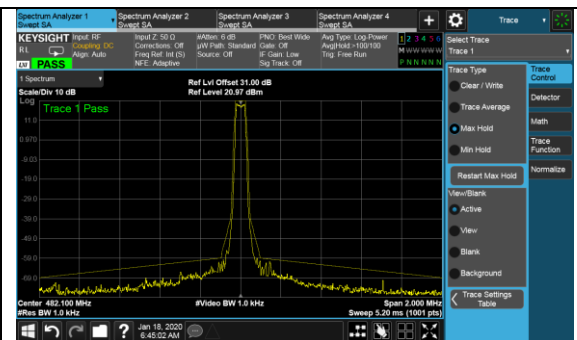


Low Channel, Mask

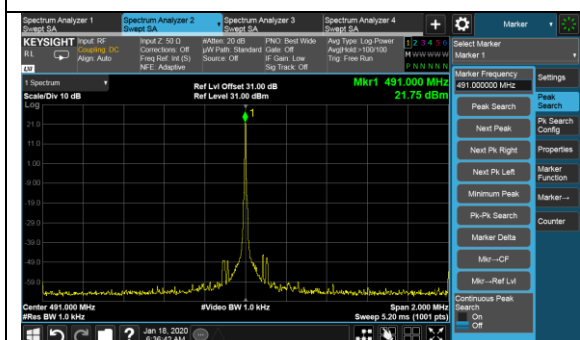


Middle Channel, Reference

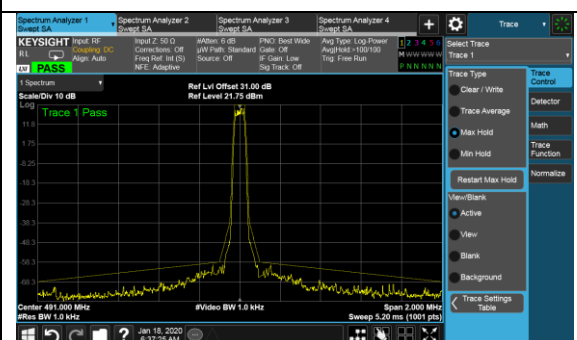

Middle Channel, Mask

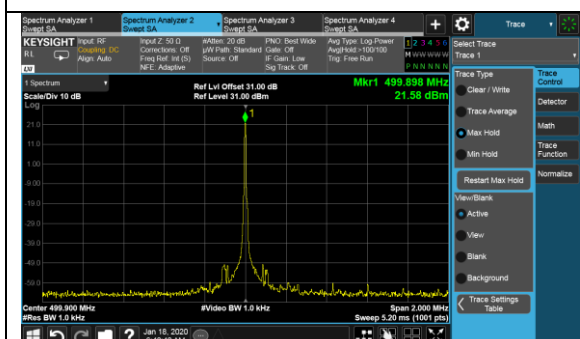


High Channel, Reference

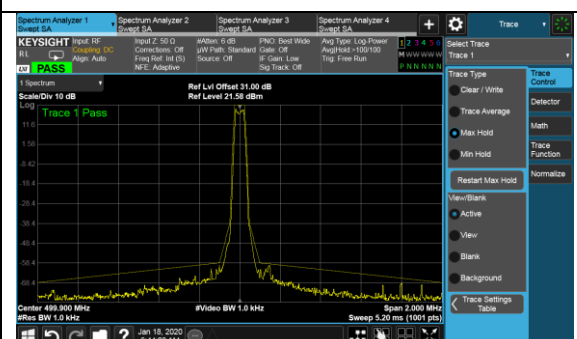


High Channel, Mask


BTR-800 HE:

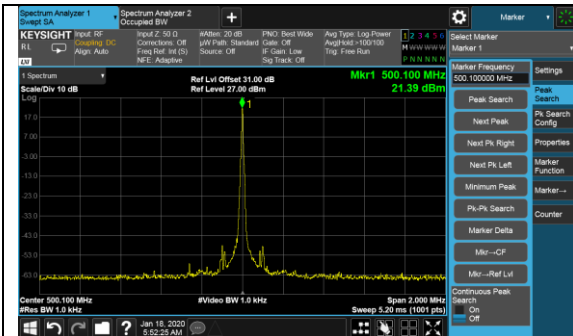


Low Channel, Reference

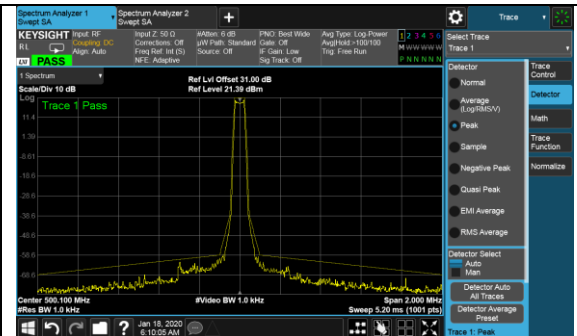


Low Channel, Mask

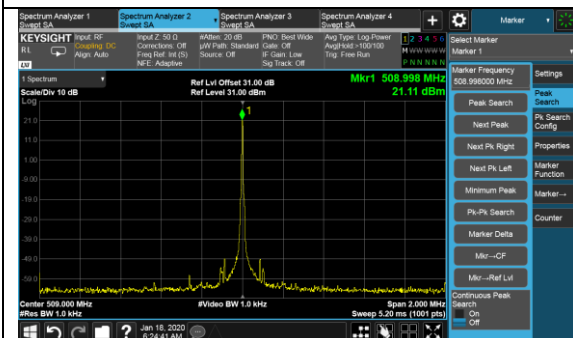


Middle Channel, Reference

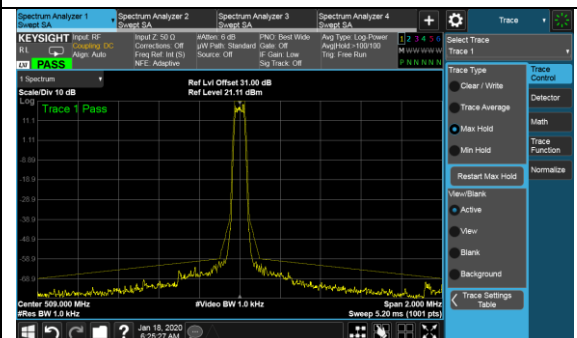

Middle Channel, Mask

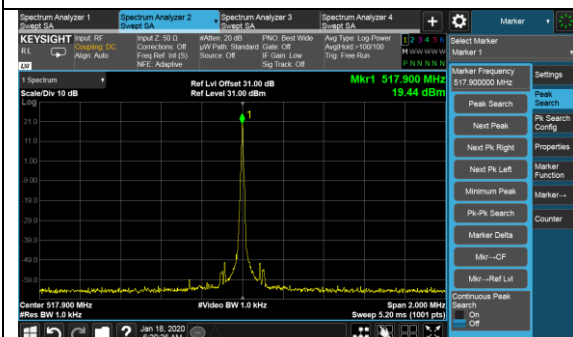

High Channel, Reference

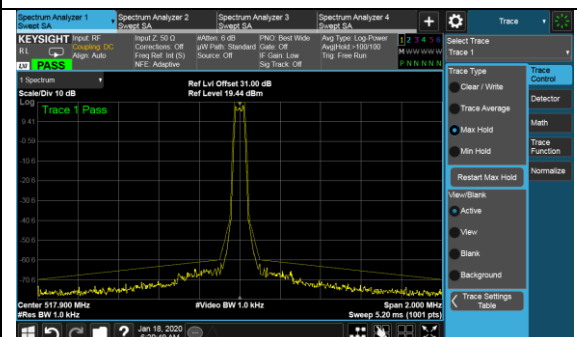

High Channel, Mask



## 4.5 Conducted spurious emissions

### 4.5.1 Limits of conducted spurious emissions measurement

According to FCC 74.861 (e) (7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.


### 4.5.2 Test instruments

Description & manufacturer	Model no.	Serial no.	Calibrated date	Calibrated until
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140597	06/05/2019	06/05/2020
30dB Attenuation	VAT-30W2	N/A	N/A	N/A

#### 4.5.3 Test procedure

- a. The EUT was set up for the rated peak power. The power was measured with spectrum analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 30 MHz to 26.5 GHz, it shall be connected to spectrum analyzer via an attenuator. The spectrum set RBW = 100 kHz, VBW = 300 kHz while below 1GHz and set RBW = 1 MHz, VBW = 3 MHz with above 1GHz.

#### 4.5.4 Test setup

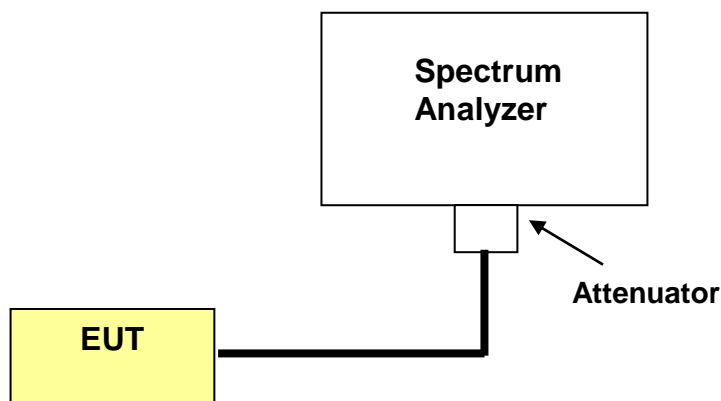


#### 4.5.5 EUT operating conditions


Same as item 4.1.5

## 4.5.6 Test results


### BTR-800 FD:

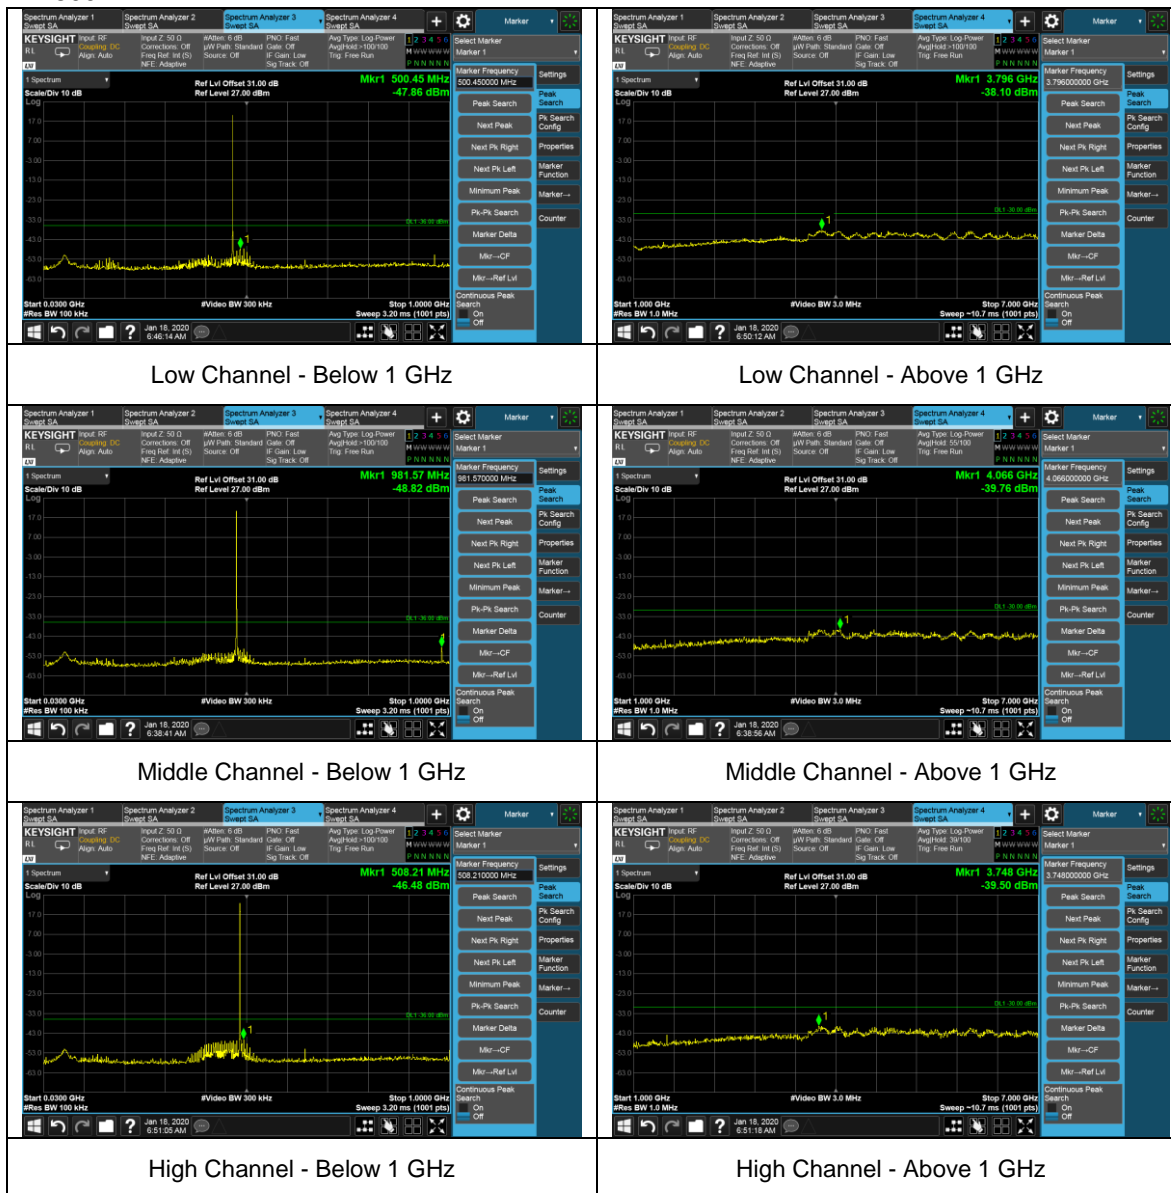


BTR-800 HE:

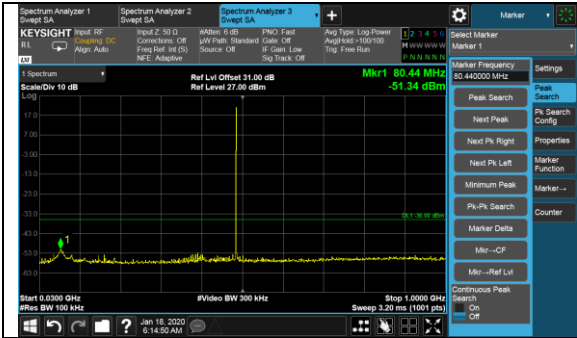


Low Channel - Below 1 GHz

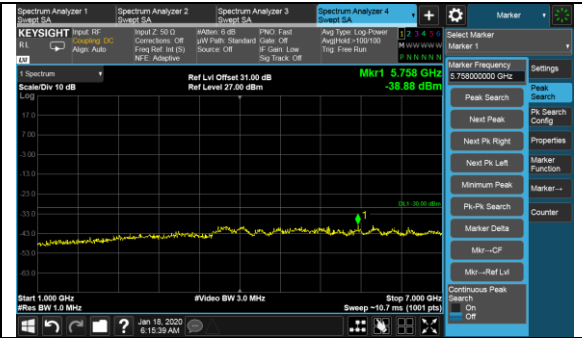


Low Channel - Above 1 GHz

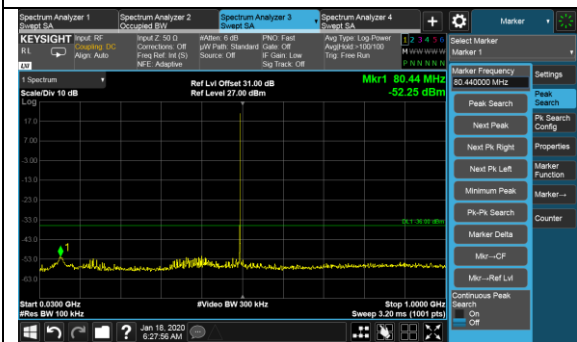


Middle Channel - Below 1 GHz

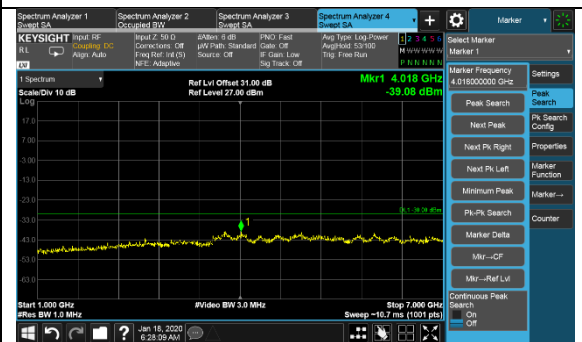

Middle Channel - Above 1 GHz

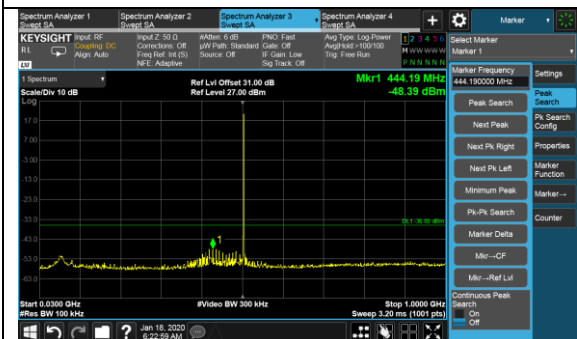

High Channel - Below 1 GHz

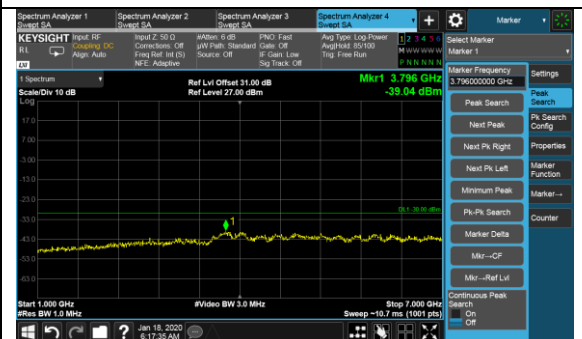

High Channel - Above 1 GHz

## 4.6 Radiated emission measurement

### 4.6.1 Limits of radiated emission measurement

According to FCC 74.861 (e) (7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

According to RSS-210 Annex G.4 Transmitter unwanted emissions

The transmitter unwanted emissions shall meet and be measured according to the requirements in sections 8.3 and 8.4 of ETSI EN 300 422-1.

#### 4.6.2 Test instruments

<b>Description &amp; Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibrated Date</b>	<b>Calibrated Until</b>
Keysight Signal Generator	MXG N5182A	MY47071065	06/28/2019	06/28/2020
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140374	07/22/2019	07/22/2020
Preamplifier RF-Lambda	RAMP00M50GA	17032300047	09/19/2019	09/19/2020
RF Preamplifier	LPA-6-30	11170602	05/06/2019	05/06/2020
Hybrid Antenna SUNAR	JB6	A111717	03/09/2019	03/09/2020
DRG Horn Antenna ETS LINDGREN	3117	214309	11/22/2019	11/22/2020
Tuned Dipole Antenna 30 - 1000 MHz (4pcs set)	AD-100	40133	01/23/2018	01/23/2020

#### 4.6.3 Test procedures


1. The power was measured with spectrum analyzer. All measurements were done at the worst channel. (low, middle and high channel of operational frequency range.)
2. Substitution method is used for EIRP measurement. In the open area test site, EUT placed on the 0.8m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “read value” is the spectrum reading the maximum power value.
3. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the turn table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a value of spectrum reading equal to “read value “ of step b. Record the power level of S.G
4.  $EIRP = \text{output power level of S.G} - \text{TX cable loss} + \text{antenna gain of substitution antenna}$ .

**Note:** the resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz


#### 4.6.4 Deviation from test standard

No deviation

#### 4.6.5 Test setup

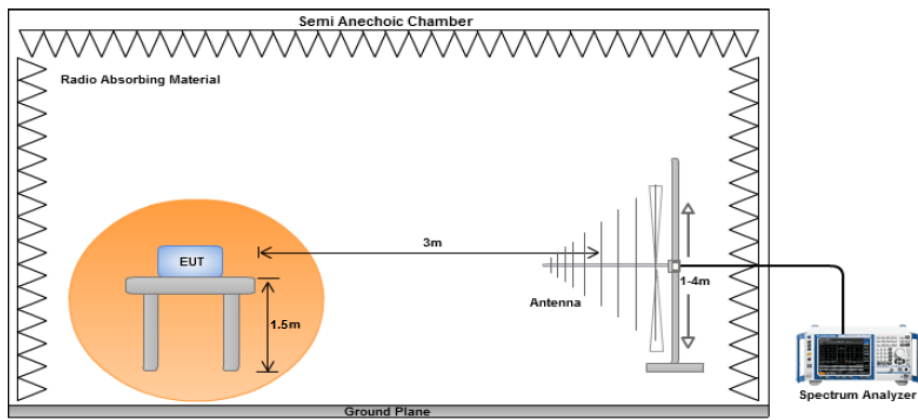

Test Setup below 1GHz

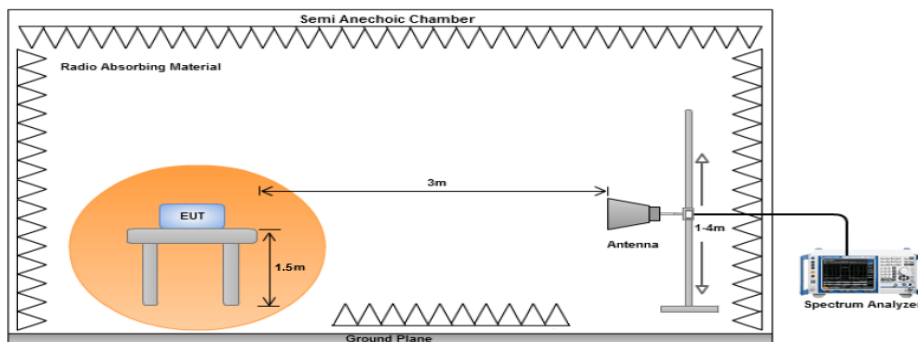

Test Setup above 1GHz

For the actual test configuration, please refer to the related item – photographs of the test configuration.

#### 4.6.6 EUT operating conditions

Same as item 4.1.5



#### 4.6.7 Test results

BTR-800 FD:

#### Below 1GHz Worst-case Data

<b>OPERATING STATE</b>	Transmitting	<b>SPURIOUS EMISSION FREQUENCY RANGE</b>	30MHz ~ 1GHz
------------------------	--------------	--	--------------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
34.49	-70.37	190	199	V	34.49	-66.39	0	0.23	-66.62	-36	-30.62
34.49	-72.43	128	178	H	34.49	-67.33	0	0.23	-67.56	-36	-31.56
155.72	-53.49	127	164	V	155.72	-48.43	0	0.42	-48.85	-36	-12.85
155.72	-55.47	277	178	H	155.72	-50.21	0	0.42	-50.63	-36	-14.63

#### Above 1GHz

<b>Frequency Range</b>	1GHz ~ 12.75GHz	<b>Operating Channel</b>	482.1 MHz
------------------------	-----------------	--------------------------	-----------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1446.3	-49.36	232	190	V	1446.3	-44.78	8.87	1.24	-37.15	-30	-7.15
1446.3	-48.4	309	200	H	1446.3	-43.82	8.87	1.24	-36.19	-30	-6.19
1928.4	-51.02	281	293	V	1928.4	-46.44	9.18	1.35	-38.61	-30	-8.61
1928.4	-48.95	360	184	H	1928.4	-44.37	9.18	1.35	-36.54	-30	-6.54

<b>Frequency Range</b>	1GHz ~ 12.75GHz	<b>Operating Channel</b>	491 MHz
------------------------	-----------------	--------------------------	---------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1473	-47.51	182	281	V	1473	-44.59	9.82	1.25	-36.02	-30	-6.02
1473	-48.55	173	128	H	1473	-45.7	9.82	1.25	-37.13	-30	-7.13
1964	-49.91	99	321	V	1964	-44.99	8.79	1.36	-37.56	-30	-7.56
1964	-50.38	182	290	H	1964	-45.46	8.79	1.36	-38.03	-30	-8.03

<b>Frequency Range</b>	1GHz ~ 12.75GHz	<b>Operating Channel</b>	499.9 MHz
------------------------	-----------------	--------------------------	-----------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1499.7	-50.48	90	183	V	1499.7	-45.46	9.82	1.24	-36.88	-30	-6.88
1499.7	-49.21	281	223	H	1499.7	-44.19	9.82	1.24	-35.61	-30	-5.61
1999.6	-48.22	283	127	V	1999.6	-47.21	8.79	1.41	-39.83	-30	-9.83
1999.6	-48.65	183	164	H	1999.6	-45.63	8.79	1.41	-38.25	-30	-8.25

**REMARKS:**

1. Absolute level (dBm) = Level (dBm) + Ant Gain (dBi) – Cable Loss (dB)
2. Margin value = Absolute level – Limit value.

BTR-800 HE:

**Below 1GHz Worst-case Data**

<b>OPERATING STATE</b>	Transmitting	<b>SPURIOUS EMISSION FREQUENCY RANGE</b>	30MHz ~ 1GHz
------------------------	--------------	--	--------------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
61.46	-67.96	129	106	V	61.46	-63.98	0	0.25	-64.23	-54	-10.23
61.46	-69.89	28	124	H	61.46	-64.85	0	0.25	-65.1	-54	-11.1
331.9	-65.56	173	144	V	331.9	-60.88	0	0.56	-61.44	-36	-25.44
331.9	-66.9	271	174	H	331.9	-63.2	0	0.56	-63.76	-36	-27.76

**Above 1GHz**

<b>Frequency Range</b>	1GHz ~ 12.75GHz	<b>Operating Channel</b>	500.1 MHz
------------------------	-----------------	--------------------------	-----------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1000.2	-50.67	173	200	V	1000.2	-45.42	7.5	1.03	-38.95	-30	-8.95
1000.2	-49.79	13	189	H	1000.2	-44.7	7.5	1.03	-38.23	-30	-8.23
1500.3	-52.1	99	174	V	1500.3	-46.89	9.82	1.24	-38.31	-30	-8.31
1500.3	-52.28	124	173	H	1500.3	-45.43	9.82	1.24	-36.85	-30	-6.85

<b>Frequency Range</b>	1GHz ~ 12.75GHz	<b>Operating Channel</b>	509 MHz
------------------------	-----------------	--------------------------	---------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1018	-49.02	192	182	V	1018	-43.92	7.5	1.03	-37.45	-30	-7.45
1018	-51.06	18	199	H	1018	-44.77	7.5	1.03	-38.3	-30	-8.3
1527	-50.99	212	145	V	1527	-45.93	9.82	1.24	-37.35	-30	-7.35
1527	-52.87	127	193	H	1527	-46.65	9.82	1.24	-38.07	-30	-8.07

<b>Frequency Range</b>	1GHz ~ 12.75GHz	<b>Operating Channel</b>	517.9 MHz
------------------------	-----------------	--------------------------	-----------

Indicated			Test Antenna		Substituted						
Freq (MHz)	Raw (dBm)	Deg	Hgt (cm)	Pol (V/H)	Freq (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1035.8	-51.19	193	183	V	1035.8	-45.99	7.5	1.03	-39.52	-30	-9.52
1035.8	-50.41	212	200	H	1035.8	-45.34	7.5	1.03	-38.87	-30	-8.87
1553.7	-53.8	230	182	V	1553.7	-48.57	9.82	1.24	-39.99	-30	-9.99
1553.7	-52.02	304	174	H	1553.7	-46.99	9.82	1.24	-38.41	-30	-8.41

**REMARKS:**

1. Absolute level (dBm) = Level (dBm) + Ant Gain (dBi) – Cable Loss (dB)
2. Margin value = Absolute level – Limit value.

## 7 Photographs of the test configuration

Please refer to the attached file (test setup photo).

## 8 Information Of The Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

**Milpitas EMC/RF/Safety/Telecom Lab**

775 Montague Expressway, Milpitas, CA 95035  
Tel: +1 408 526 1188

**Sunnyvale OTA/Bluetooth Lab**

1293 Anvilwood Avenue, Sunnyvale, CA  
94089  
Tel: +1 669 600 5293

**Littleton EMC/RF/Safety/Environmental Lab**

1 Distribution Center Cir #1, Littleton, MA 01460  
Tel: +1 978 486 8880

**Email:** [sales.eaw@us.bureauveritas.com](mailto:sales.eaw@us.bureauveritas.com)

**Web Site:** [www.cps.bureauveritas.com](http://www.cps.bureauveritas.com)

The address and road map of all our labs can be found in our web site also.

--- END ---