

Ant. S11 Parameter (鼠标)



Fre.(MHz)

2400

2450

2483

S11(dB)

-15.4

-25.0

-12.5




Ant. Gain Pattern @2.45GHz (鼠标)

- Active Test (Free Space)



2450.0MHz H+V, Eff: 55.1%

Back View

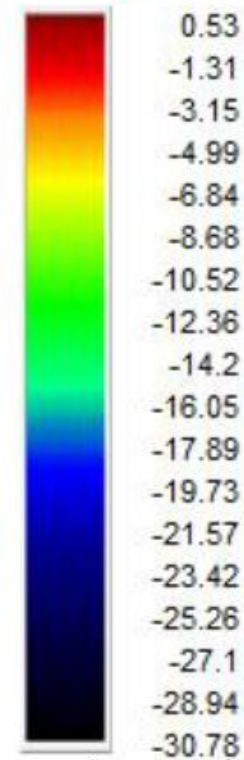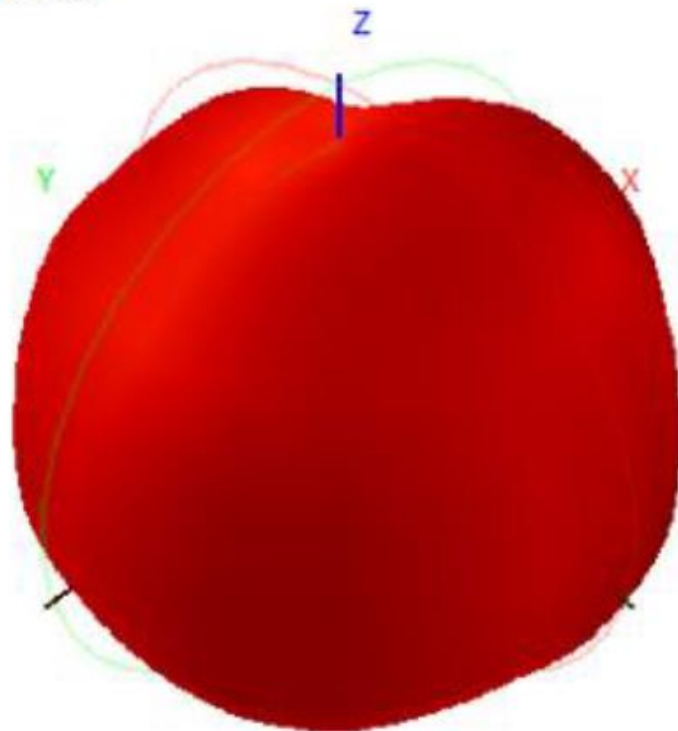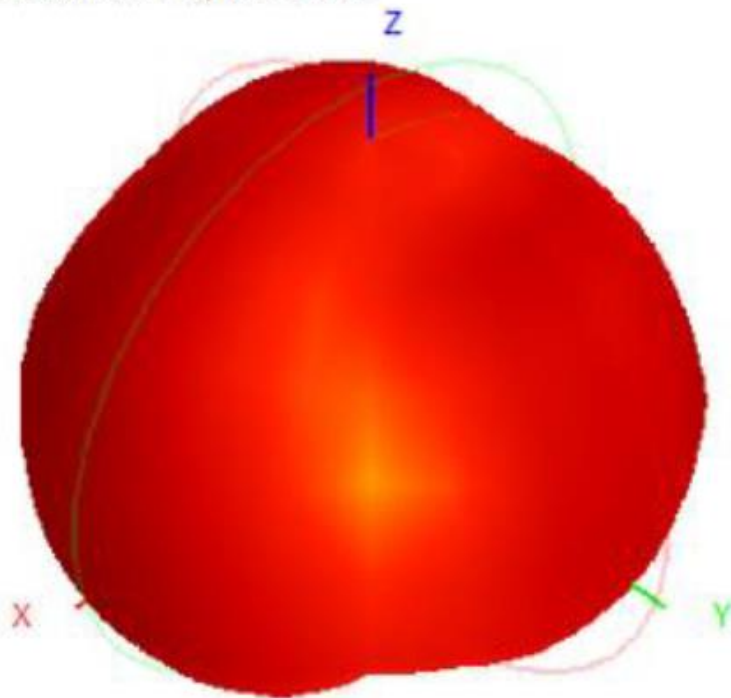

Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-2.42	-2.49	-2.55	-2.59	-2.62	-2.59	-2.56	-2.55	-2.51	-2.51	-2.58
Gain (dBi)	1.00	0.93	0.79	0.62	0.56	0.53	0.53	0.59	0.71	0.84	0.75
Efficiency (%)	57.23	56.37	55.55	55.05	54.64	55.13	55.41	55.55	56.06	56.10	55.27

Frequency	Efficiency	Gain
2400MHz	57.23%	1.0dBi
2450MHz	55.13%	0.53 dBi
2500MHz	55.27%	0.75dBi

ANT厂牌	HM
型号	ANT_01
尺寸	25*4.4mm
类型	PCB_F

Manufacturer: **Dongguan City Heatmoving Electronic Technology Co. Ltd**

Address: **No.28, Jinyuling road, Dongcheng street, Dongguan city, 523000 Guangdong, P.R. China**