


LTE Band 66 (CA 66B), Channel Bandwidth 10MHz+10MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		16QAM_Full RB	16QAM_Full RB
132022+132121	1715.0+1724.9	18.701	19.39
132373+132472	1750.1+1760.0	18.710	19.39
132523+132622	1765.1+1775.0	18.773	20.76

99% Occupied Bandwidth

Spectrum Plot of Worst Value


10MHz+10MHz / 16QAM

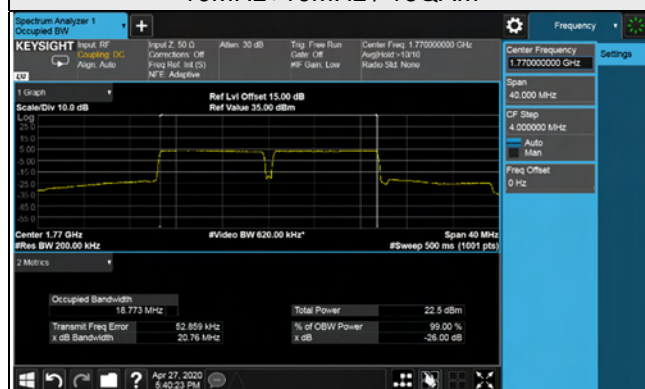

26dB Bandwidth

Spectrum Plot of Worst Value

10MHz+10MHz / 16QAM

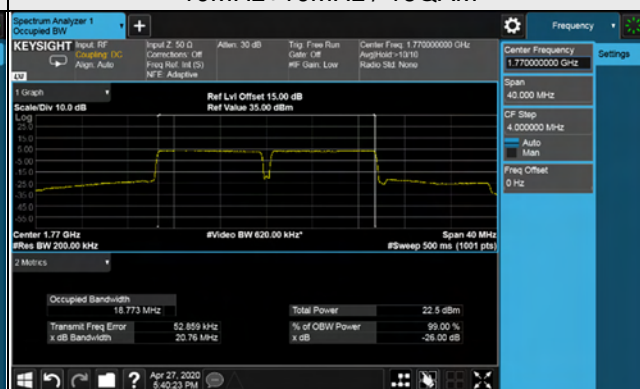


LTE Band 66 (CA 66B), Channel Bandwidth 5MHz+15MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		16QAM_Full RB	16QAM_Full RB
132002+132095	1713.0+1722.3	18.129	18.76
132353+132447	1748.1+1757.4	18.167	18.78
132504+132597	1763.2+1772.5	18.121	18.76

99% Occupied Bandwidth

Spectrum Plot of Worst Value


5MHz+15MHz / 16QAM

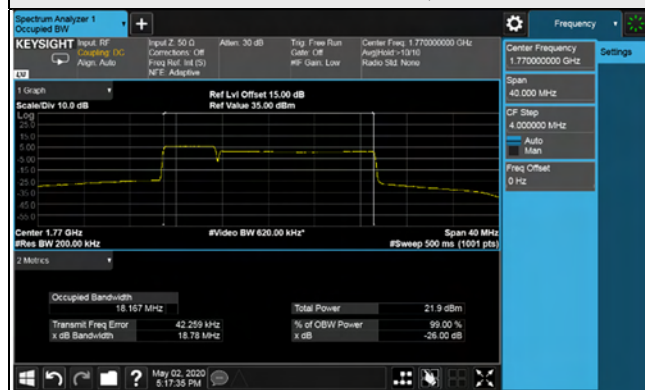

26dB Bandwidth


Spectrum Plot of Worst Value

5MHz+15MHz / 16QAM

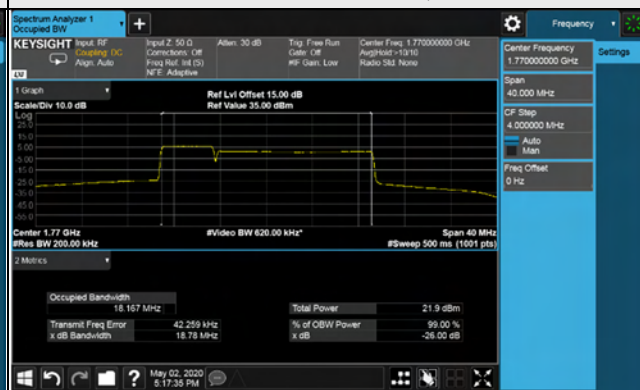


LTE Band 66 (CA 66B), Channel Bandwidth 15MHz+5MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		16QAM_Full RB	26dB Bandwidth (MHz)
132047+132140	1717.5+1726.8	18.093	18.75
132398+132491	1752.6+1761.9	18.079	18.74
132549+132642	1767.7+1777.0	18.180	18.78

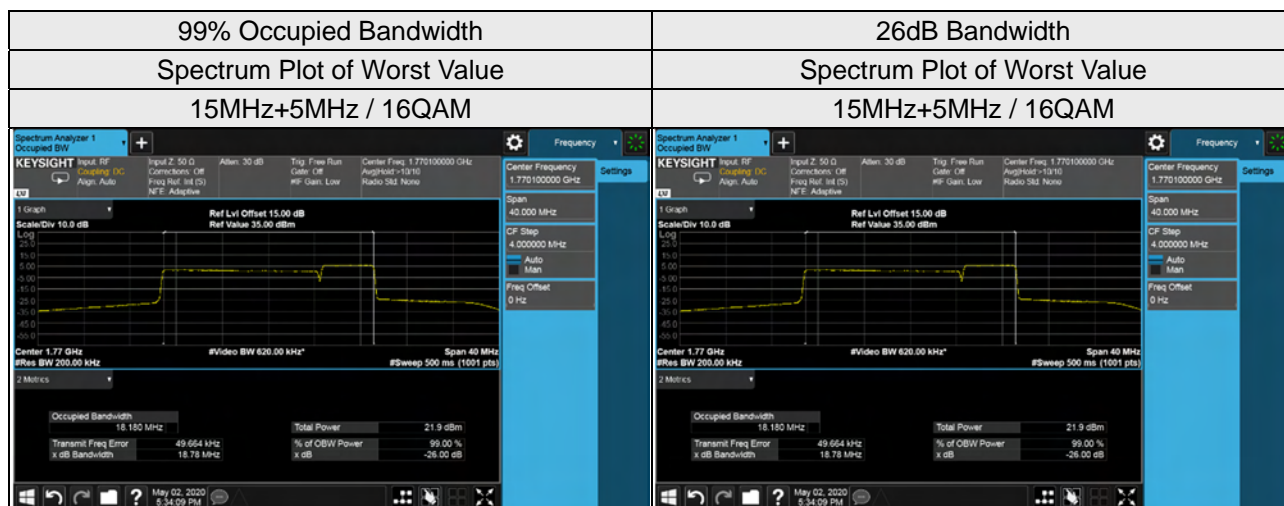


LTE Band 66 (CA 66B), Channel Bandwidth 5MHz+10MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		16QAM_Full RB	26dB Bandwidth (MHz)
132000+132072	1712.8+1720.0	13.830	14.32
132375+132447	1750.3+1757.5	13.816	14.31
132550+132622	1767.8+1775.0	13.850	14.33

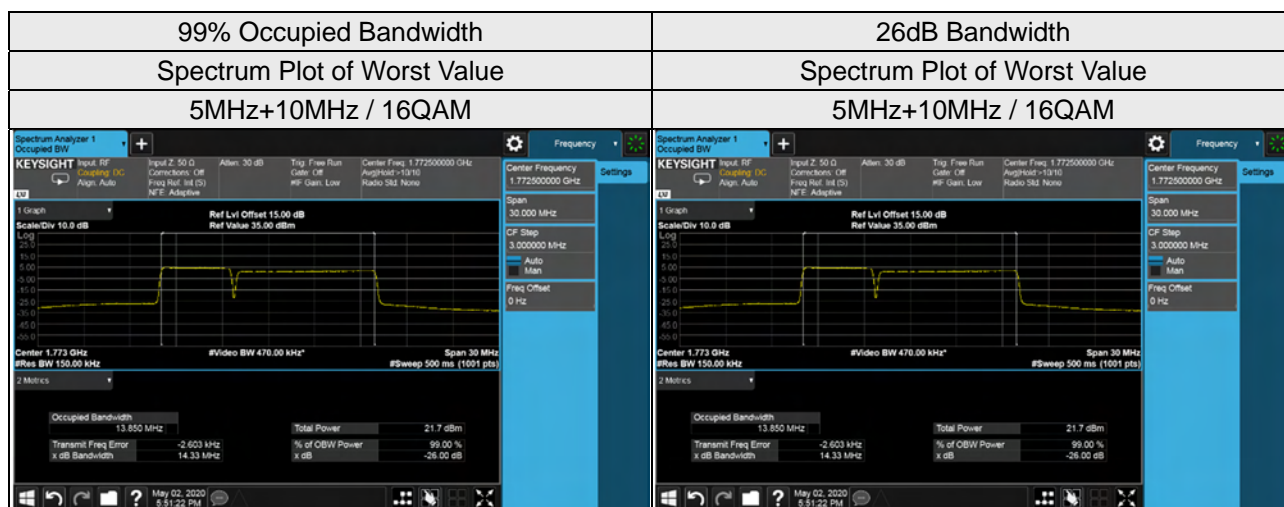


LTE Band 66 (CA 66B), Channel Bandwidth 10MHz+5MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		16QAM_Full RB	26dB Bandwidth (MHz)
132022+132094	1715.0+1722.2	13.810	14.31
132397+132469	1752.5+1759.7	13.798	14.31
132572+132644	1770.0+1777.2	13.846	14.32

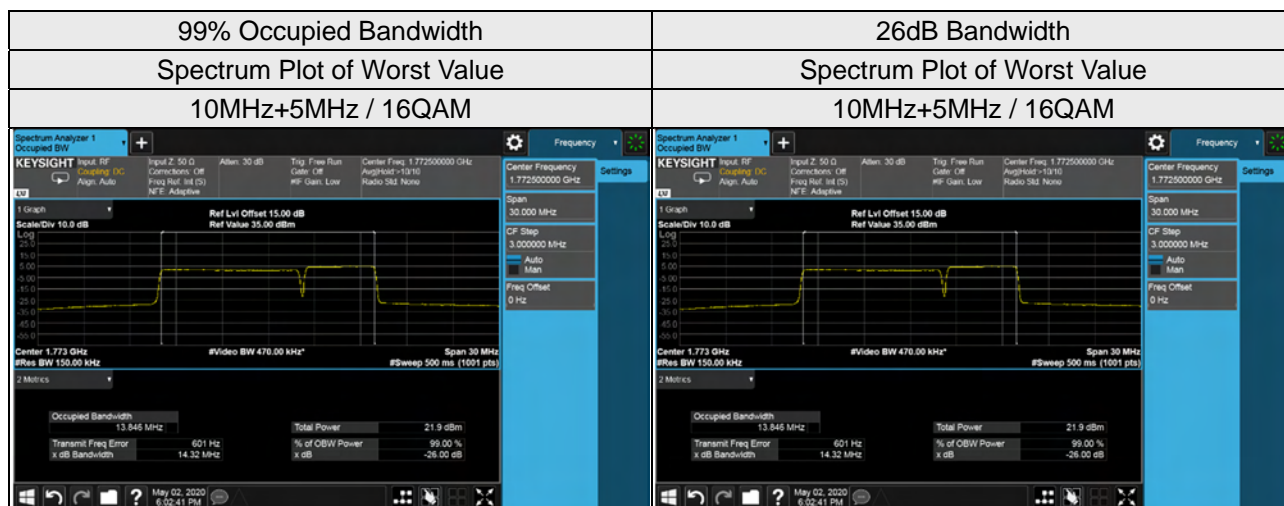

LTE Band 66 (CA 66B), Channel Bandwidth 5MHz+5MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		16QAM_Full RB	26dB Bandwidth (MHz)
131997+132045	1712.5+1717.3	9.2098	9.575
132398+132446	1752.6+1757.4	9.1930	9.565
132599+132647	1772.7+1777.5	9.2171	9.590

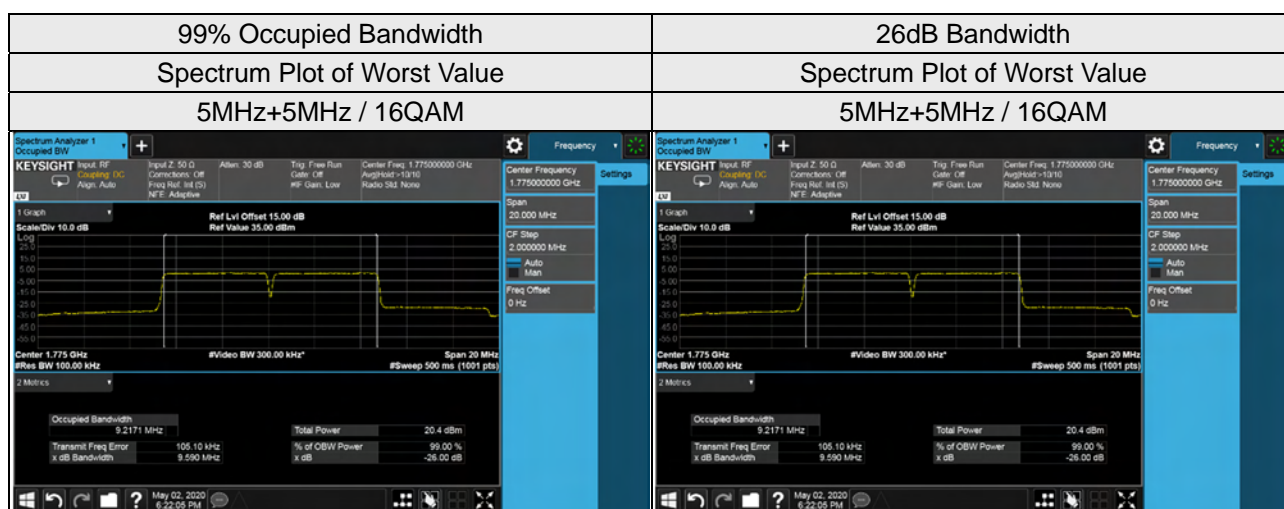


LTE Band 66 (CA 66B), Channel Bandwidth 10MHz+10MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		64QAM_Full RB	64QAM_Full RB
132022+132121	1715.0+1724.9	18.707	19.40
132373+132472	1750.1+1760.0	18.725	20.24
132523+132622	1765.1+1775.0	18.781	20.35

99% Occupied Bandwidth

Spectrum Plot of Worst Value

10MHz+10MHz / 64QAM

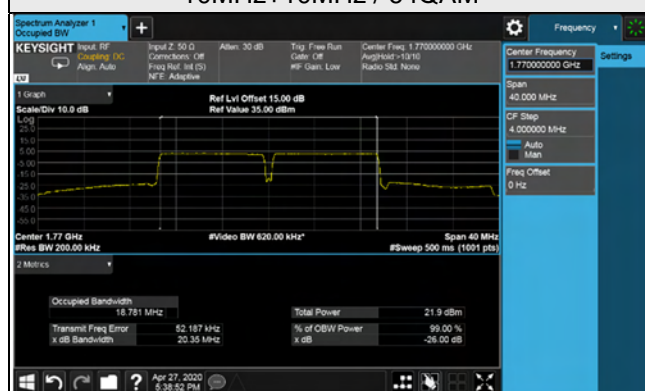

26dB Bandwidth

Spectrum Plot of Worst Value

10MHz+10MHz / 64QAM




LTE Band 66 (CA 66B), Channel Bandwidth 5MHz+15MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		64QAM_Full RB	64QAM_Full RB
132002+132095	1713.0+1722.3	18.141	18.77
132353+132447	1748.1+1757.4	18.174	18.78
132504+132597	1763.2+1772.5	18.131	18.77

99% Occupied Bandwidth

Spectrum Plot of Worst Value


5MHz+15MHz / 64QAM

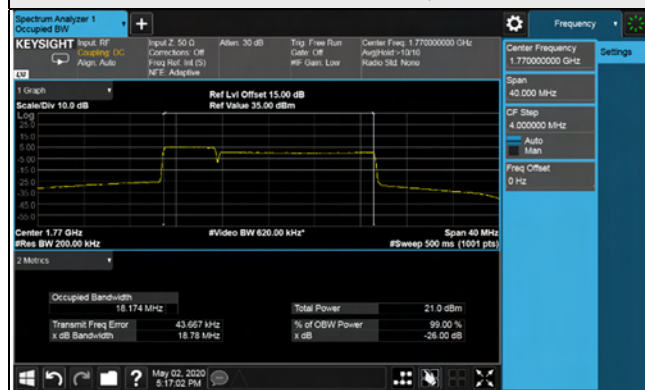

26dB Bandwidth

Spectrum Plot of Worst Value

5MHz+15MHz / 64QAM

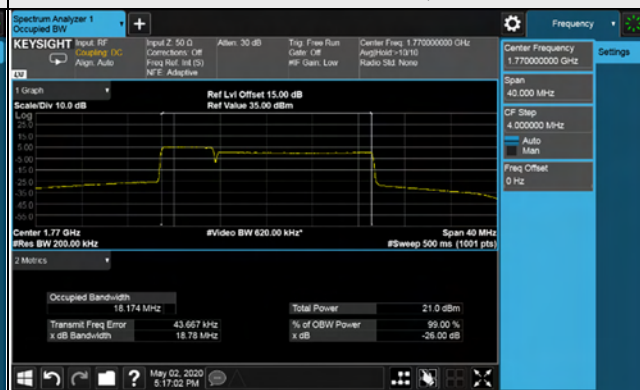


LTE Band 66 (CA 66B), Channel Bandwidth 15MHz+5MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		64QAM_Full RB	64QAM_Full RB
132047+132140	1717.5+1726.8	18.091	18.75
132398+132491	1752.6+1761.9	18.078	18.75
132549+132642	1767.7+1777.0	18.183	18.78

99% Occupied Bandwidth

Spectrum Plot of Worst Value


15MHz+5MHz / 64QAM

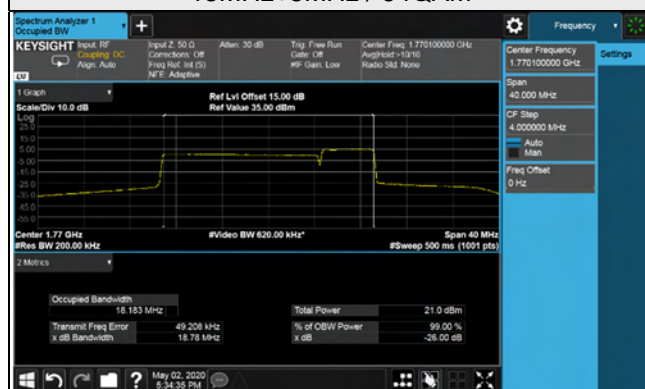

26dB Bandwidth

Spectrum Plot of Worst Value

15MHz+5MHz / 64QAM

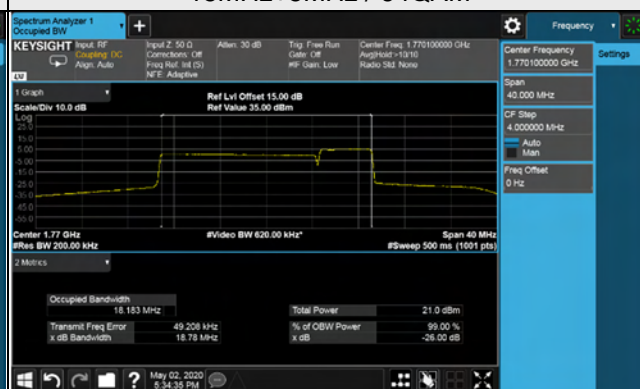


LTE Band 66 (CA 66B), Channel Bandwidth 5MHz+10MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		64QAM_Full RB	64QAM_Full RB
132000+132072	1712.8+1720.0	13.842	14.33
132375+132447	1750.3+1757.5	13.826	14.31
132550+132622	1767.8+1775.0	13.858	14.33

99% Occupied Bandwidth

Spectrum Plot of Worst Value


5MHz+10MHz / 64QAM

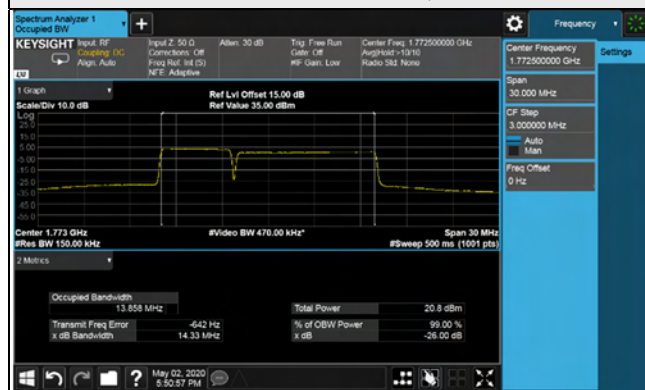

26dB Bandwidth

Spectrum Plot of Worst Value

5MHz+10MHz / 64QAM

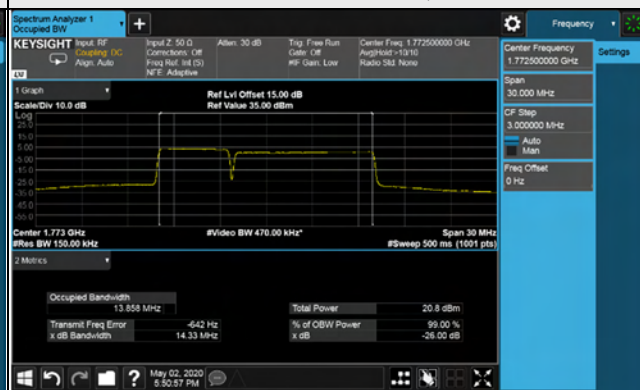


LTE Band 66 (CA 66B), Channel Bandwidth 10MHz+5MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		64QAM_Full RB	64QAM_Full RB
132022+132094	1715.0+1722.2	13.821	14.31
132397+132469	1752.5+1759.7	13.808	14.31
132572+132644	1770.0+1777.2	13.852	14.33

99% Occupied Bandwidth

Spectrum Plot of Worst Value


10MHz+5MHz / 64QAM

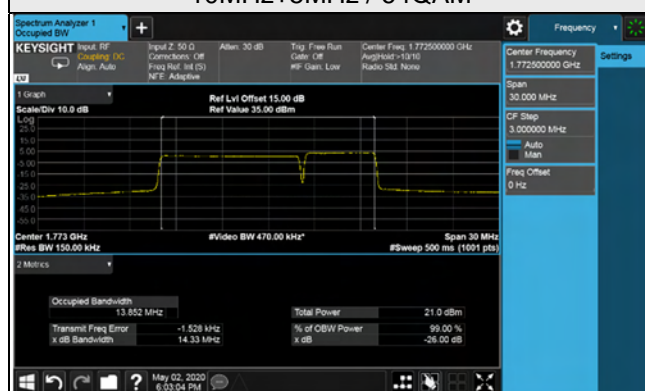

26dB Bandwidth

Spectrum Plot of Worst Value

10MHz+5MHz / 64QAM

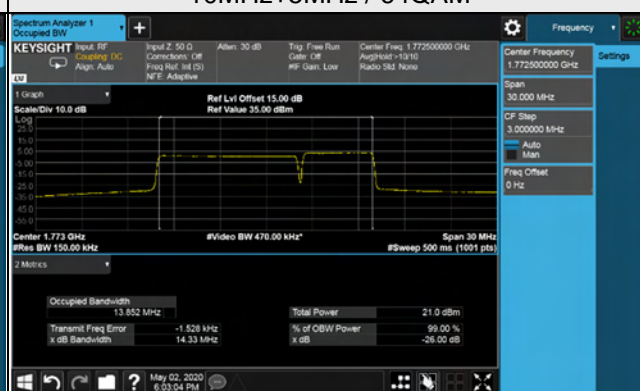


LTE Band 66 (CA 66B), Channel Bandwidth 5MHz+5MHz

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		64QAM_Full RB	64QAM_Full RB
131997+132045	1712.5+1717.3	9.2145	9.581
132398+132446	1752.6+1757.4	9.2115	9.573
132599+132647	1772.7+1777.5	9.2208	9.586

99% Occupied Bandwidth

Spectrum Plot of Worst Value


5MHz+5MHz / 64QAM

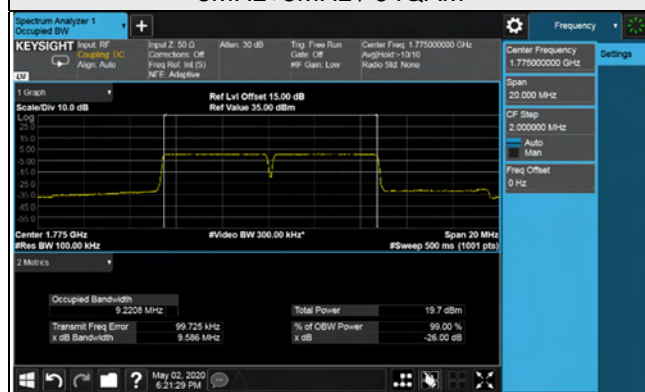

26dB Bandwidth

Spectrum Plot of Worst Value

5MHz+5MHz / 64QAM

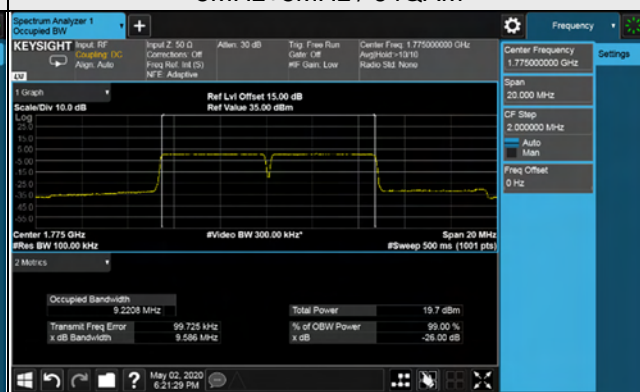

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

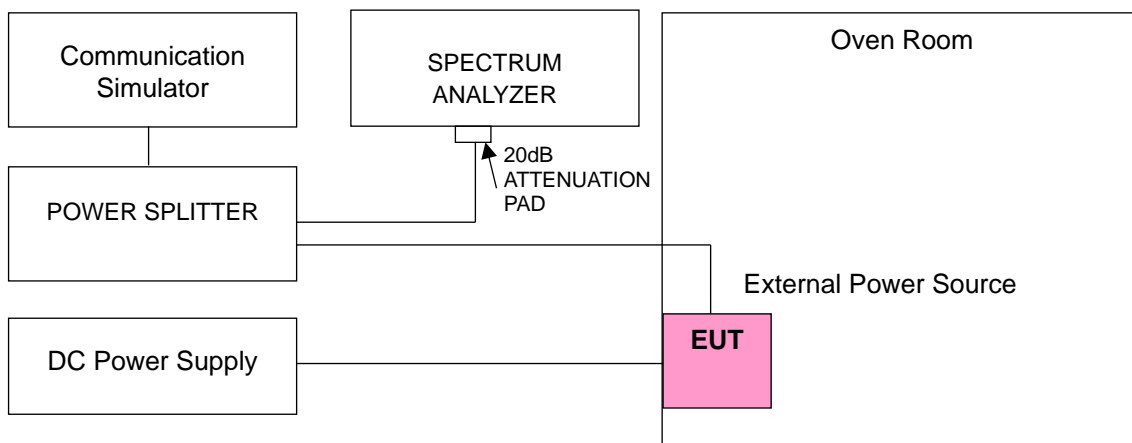

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7 (CA 7C)			
	Channel Bandwidth: 15MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
4.25	2507.800002	0.001	2524.900002	0.001
5	2507.800002	0.001	2524.900003	0.001
5.75	2507.800001	0.000	2524.900002	0.001

Note: The applicant defined the normal working voltage is from 4.25Vdc to 5.75Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7 (CA 7C)			
	Channel Bandwidth: 15MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2507.800001	0.000	2524.900004	0.002
-20	2507.800001	0.001	2524.900003	0.001
-10	2507.800002	0.001	2524.900003	0.001
0	2507.800002	0.001	2524.900002	0.001
10	2507.800002	0.001	2524.900004	0.002
20	2507.799997	-0.001	2524.899997	-0.001
30	2507.799997	-0.001	2524.899998	-0.001
40	2507.799999	0.000	2524.899999	-0.001
50	2507.799997	-0.001	2524.899996	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38 (CA 38C)			
	Channel Bandwidth: 20MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
4.25	2590.200002	0.001	2610.000002	0.001
5	2590.200003	0.001	2610.000002	0.001
5.75	2590.200004	0.001	2610.000002	0.001

Note: The applicant defined the normal working voltage is from 4.25Vdc to 5.75Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38 (CA 38C)			
	Channel Bandwidth: 20MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2590.200003	0.001	2610.000002	0.001
-20	2590.200004	0.001	2610.000003	0.001
-10	2590.200003	0.001	2610.000003	0.001
0	2590.200001	0.000	2610.000002	0.001
10	2590.200002	0.001	2610.000004	0.001
20	2590.199998	-0.001	2609.999997	-0.001
30	2590.199997	-0.001	2609.999996	-0.001
40	2590.199996	-0.002	2609.999998	-0.001
50	2590.199997	-0.001	2609.999996	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41 (CA 41C)			
	Channel Bandwidth: 20MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
4.25	2660.200003	0.001	2680.000002	0.001
5	2660.200003	0.001	2680.000001	0.000
5.75	2660.200003	0.001	2680.000004	0.001

Note: The applicant defined the normal working voltage is from 4.25Vdc to 5.75Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41 (CA 41C)			
	Channel Bandwidth: 20MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2660.200003	0.001	2680.000003	0.001
-20	2660.200002	0.001	2680.000002	0.001
-10	2660.200003	0.001	2680.000001	0.000
0	2660.200003	0.001	2680.000003	0.001
10	2660.200001	0.001	2680.000003	0.001
20	2660.199996	-0.002	2679.999997	-0.001
30	2660.199997	-0.001	2679.999998	-0.001
40	2660.199997	-0.001	2679.999997	-0.001
50	2660.199998	-0.001	2679.999996	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66 (CA 66C)			
	Channel Bandwidth: 20MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
4.25	1745.100002	0.001	1764.900003	0.002
5	1745.100002	0.001	1764.900004	0.002
5.75	1745.100003	0.002	1764.900003	0.002

Note: The applicant defined the normal working voltage is from 4.25Vdc to 5.75Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66 (CA 66C)			
	Channel Bandwidth: 20MHz+20MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1745.100002	0.001	1764.900002	0.001
-20	1745.100002	0.001	1764.900004	0.002
-10	1745.100002	0.001	1764.900002	0.001
0	1745.100002	0.001	1764.900001	0.001
10	1745.100004	0.002	1764.900004	0.002
20	1745.099997	-0.001	1764.899999	-0.001
30	1745.099999	-0.001	1764.899998	-0.001
40	1745.099998	-0.001	1764.899997	-0.002
50	1745.099998	-0.001	1764.899998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66 (CA 66B)			
	Channel Bandwidth: 10MHz+10MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
4.25	1715.000003	0.002	1724.900004	0.002
5	1715.000002	0.001	1724.900003	0.002
5.75	1715.000004	0.002	1724.900004	0.002

Note: The applicant defined the normal working voltage is from 4.25Vdc to 5.75Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66 (CA 66B)			
	Channel Bandwidth: 10MHz+10MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000002	0.001	1724.900003	0.002
-20	1715.000001	0.001	1724.900003	0.001
-10	1715.000003	0.002	1724.900002	0.001
0	1715.000002	0.001	1724.900002	0.001
10	1715.000001	0.001	1724.900003	0.002
20	1714.999997	-0.002	1724.899996	-0.002
30	1714.999996	-0.002	1724.899997	-0.002
40	1714.999996	-0.002	1724.899997	-0.002
50	1714.999996	-0.002	1724.899997	-0.002

4.4 Channel Edge Measurement

4.4.1 Limits of Band Edge Measurement


For LTE Band 66

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.

For LTE Band 7, 38, 41

According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.

4.4.2 Test Setup






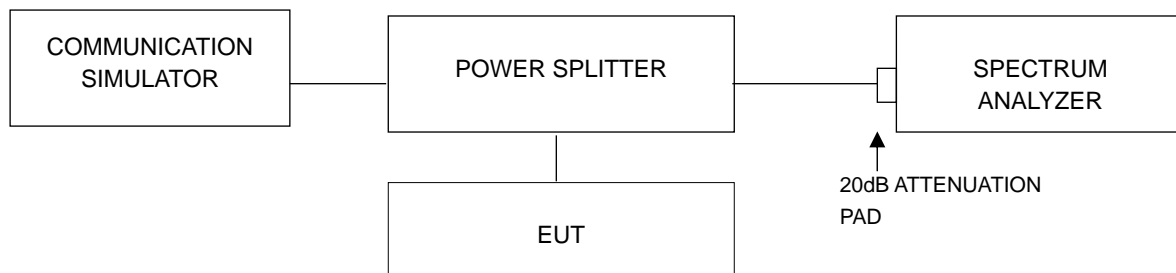


4.4.3 Test Procedures

- The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements of Emission Mask were done at 3 channels: low, middle and high operational frequency range. All measurements of Band Edge were done at 2 channels: low and high operational frequency range.(only for LTE Band 66 CA mode)
- The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 200kHz and VB of the spectrum is 620kHz (LTE Channel Bandwidth 10MHz+10MHz). (only for LTE Band 66 CA mode)
- The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 430kHz and VB of the spectrum is 1.3MHz (LTE Channel Bandwidth 20MHz+20MHz).(only for LTE Band 66 CA mode)
- For the measurement method of LTE Band 7C, 38C, Band 41C, please refer to 27.53(m)(4)(6).
- Record the max trace plot into the test report.

4.4.4 Test Results

LTE Band 7 (CA 7C)
Emission Mask:

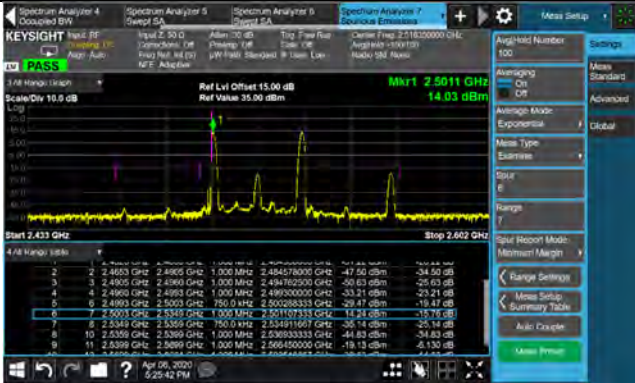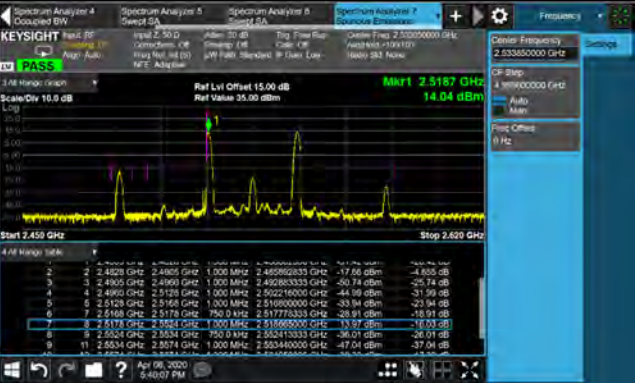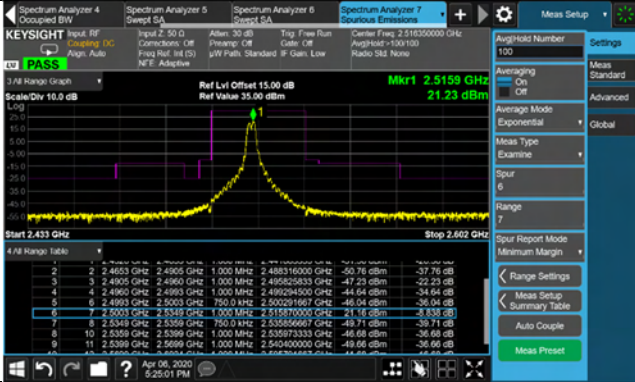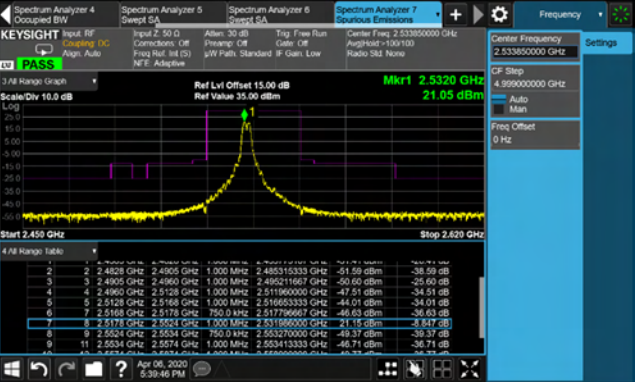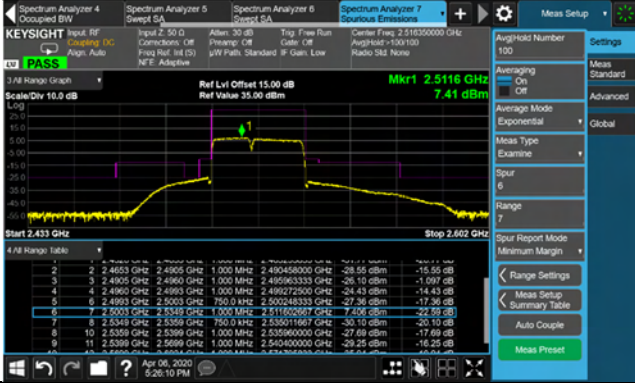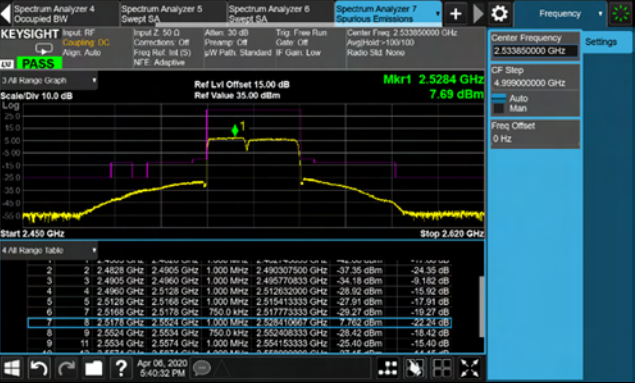
Channel Bandwidth: 15MHz+20MHz					
Channel 20828 (2507.8MHz)+ Channel 20999 (2524.9MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 99 RB Offset	Channel 21003 (2525.3MHz)+ Channel 21174 (2542.4MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 99 RB Offset
					
Channel 20828 (2507.8MHz)+ Channel 20999 (2524.9MHz)	QPSK	1 RB / 74 RB Offset+ 1 RB / 0 RB Offset	Channel 21003 (2525.3MHz)+ Channel 21174 (2542.4MHz)	QPSK	1 RB / 74 RB Offset+ 1 RB / 0 RB Offset
					
Channel 20828 (2507.8MHz)+ Channel 20999 (2524.9MHz)	QPSK	75 RB / 0 RB Offset 100 RB / 0 RB Offset	Channel 21003 (2525.3MHz)+ Channel 21174 (2542.4MHz)	QPSK	75 RB / 0 RB Offset 100 RB / 0 RB Offset
					

Channel Bandwidth: 15MHz+20MHz

Channel 21179
(2542.9MHz)+
Channel 21350
(2560.0MHz)

QPSK


1 RB / 0 RB Offset+
1 RB / 99 RB Offset

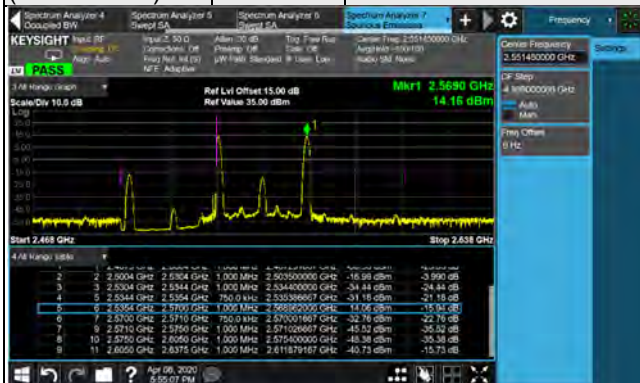

Channel 21179
(2542.9MHz)+
Channel 21350
(2560.0MHz)

QPSK


1 RB / 74 RB Offset+
1 RB / 0 RB Offset

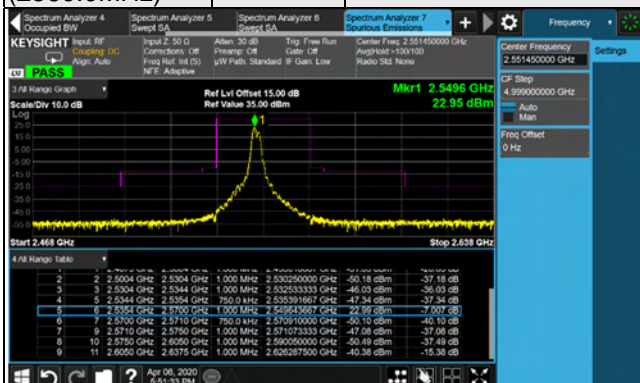

Channel 21179
(2542.9MHz)+
Channel 21350
(2560.0MHz)

QPSK



75 RB / 0 RB Offset
100 RB / 0 RB Offset

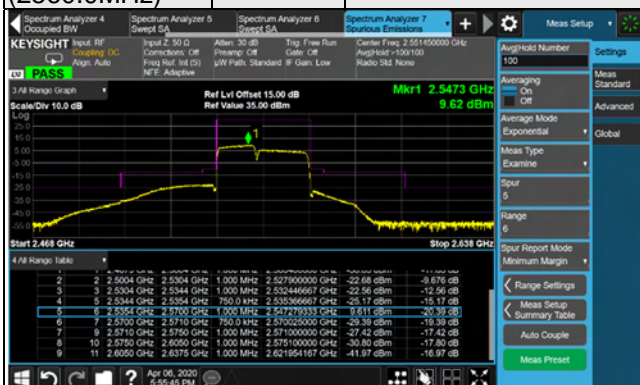



LTE Band 38 (CA 38C)
Emission Mask:

Channel Bandwidth: 20MHz+20MHz

Channel 37850 (2580.0MHz)+ Channel 38048 (2599.8MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 99 RB Offset	Channel 37901 (2585.1MHz)+ Channel 38099 (2604.9MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 99 RB Offset
---	------	--	---	------	--

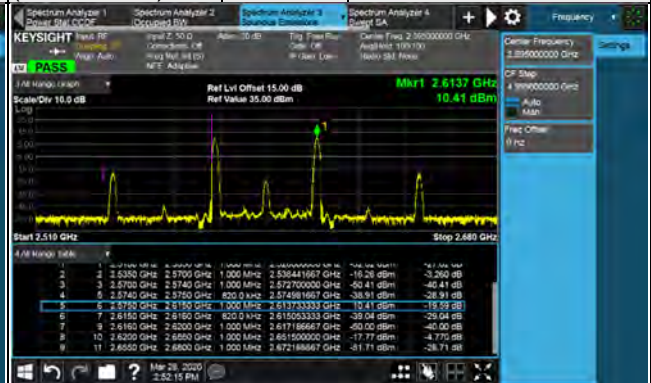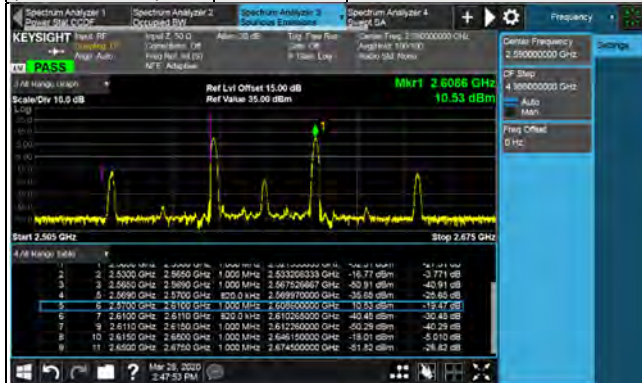

Channel 37850 (2580.0MHz)+ Channel 38048 (2599.8MHz)	QPSK	1 RB / 99 RB Offset+ 1 RB / 0 RB Offset	Channel 37901 (2585.1MHz)+ Channel 38099 (2604.9MHz)	QPSK	1 RB / 99 RB Offset+ 1 RB / 0 RB Offset
---	------	--	---	------	--

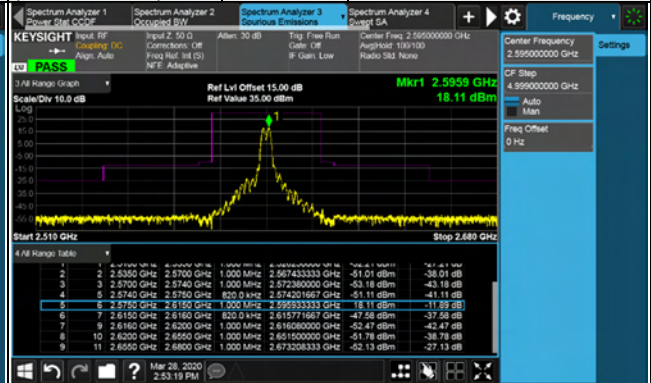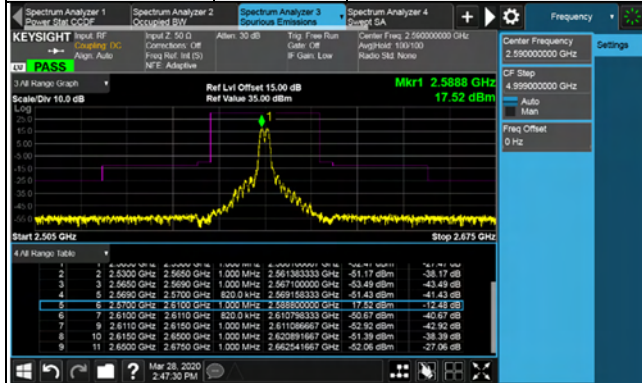


Channel 37850 (2580.0MHz)+ Channel 38048 (2599.8MHz)	QPSK	100 RB / 0 RB Offset	Channel 37901 (2585.1MHz)+ Channel 38099 (2604.9MHz)	QPSK	100 RB / 0 RB Offset
---	------	----------------------	---	------	----------------------




Channel Bandwidth: 20MHz+20MHz

Channel 37952 (2590.2MHz)+
Channel 38150 (2610.0MHz) QPSK
1 RB / 0 RB Offset+
1 RB / 99 RB Offset

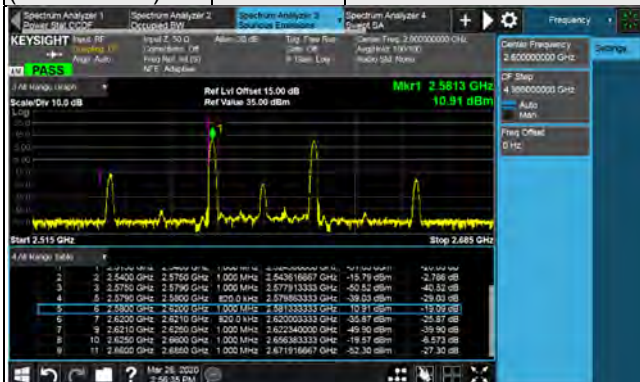

Channel 37952 (2590.2MHz)+
Channel 38150 (2610.0MHz) QPSK
1 RB / 99 RB Offset+
1 RB / 0 RB Offset



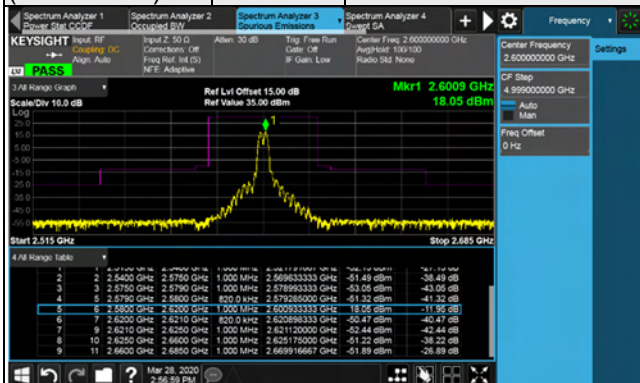


Channel 37952 (2590.2MHz)+
Channel 38150 (2610.0MHz) QPSK
100 RB / 0 RB Offset




LTE Band 41 (CA 41C)
Emission Mask:

Channel Bandwidth: 20MHz+20MHz

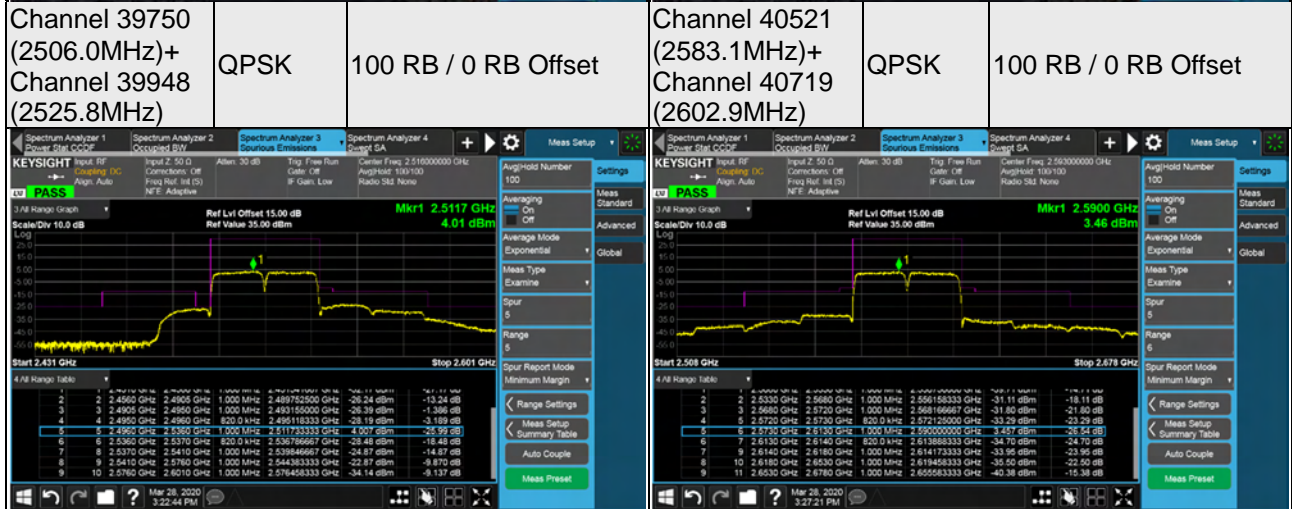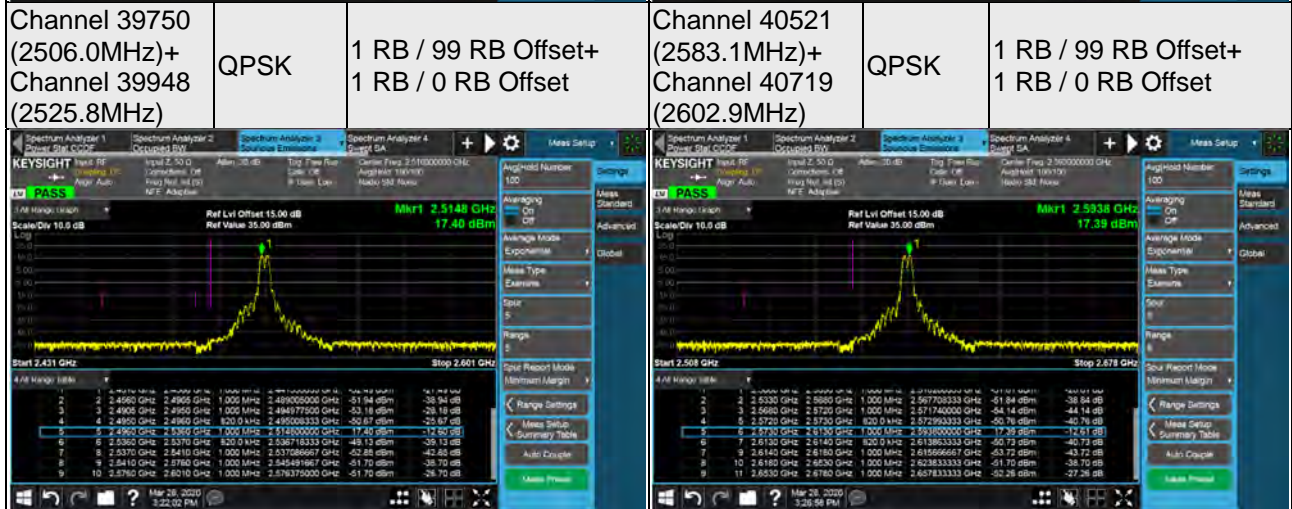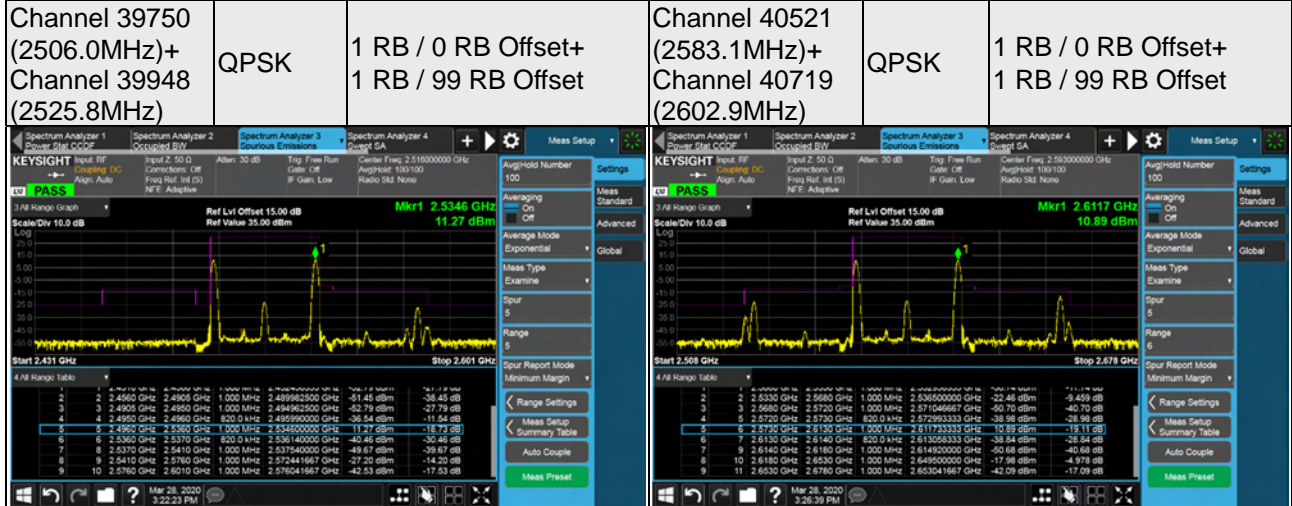


Channel Bandwidth: 20MHz+20MHz

Channel 41292 (2660.2MHz)+
Channel 41490 (2680.0MHz) QPSK
1 RB / 0 RB Offset+
1 RB / 99 RB Offset

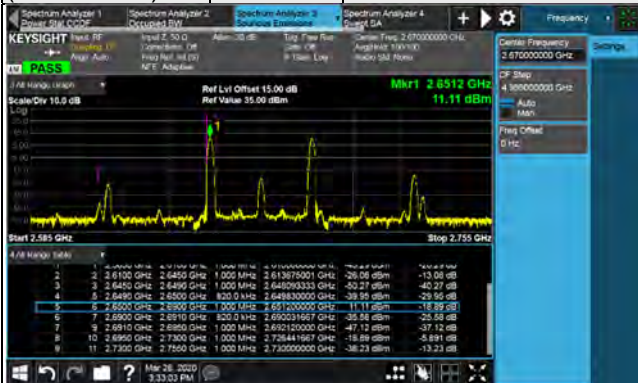

Channel 41292 (2660.2MHz)+
Channel 41490 (2680.0MHz) QPSK
1 RB / 99 RB Offset+
1 RB / 0 RB Offset

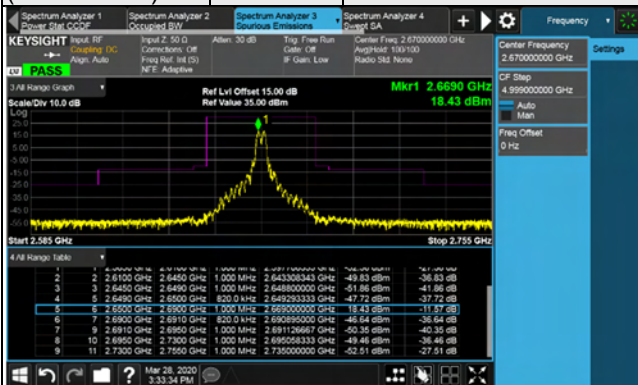


Channel 41292 (2660.2MHz)+
Channel 41490 (2680.0MHz) QPSK
100 RB / 0 RB Offset




LTE Band 66 (CA 66C)
Band Edge:

Channel Bandwidth: 20MHz+20MHz

Channel 132072 (1720.0MHz)+ Channel 132270 (1739.8MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 99 RB Offset	Channel 132374 (1750.2MHz)+ Channel 132572 (1770.0MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 99 RB Offset
---	------	--	---	------	--

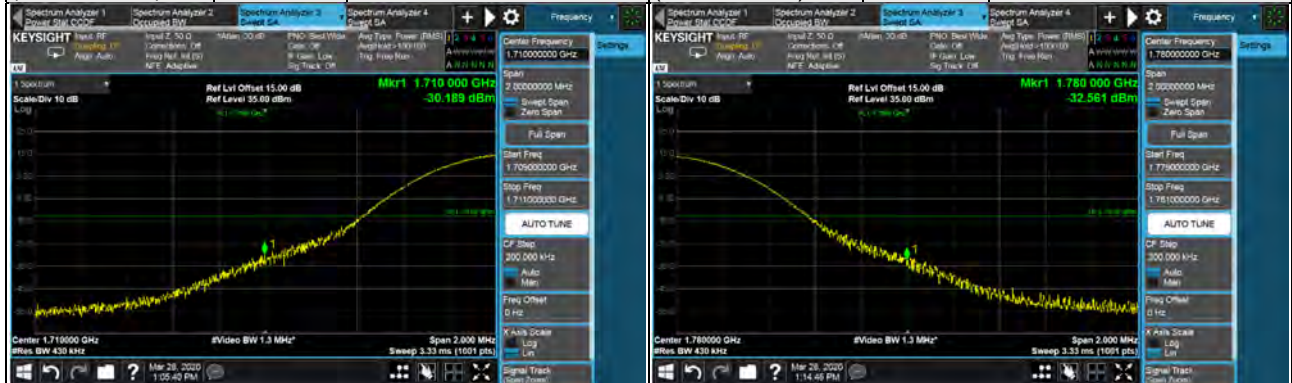



Channel 132072 (1720.0MHz)+ Channel 132270 (1739.8MHz)	QPSK	100 RB / 0 RB Offset	Channel 132374 (1750.2MHz)+ Channel 132572 (1770.0MHz)	QPSK	100 RB / 0 RB Offset
---	------	----------------------	---	------	----------------------

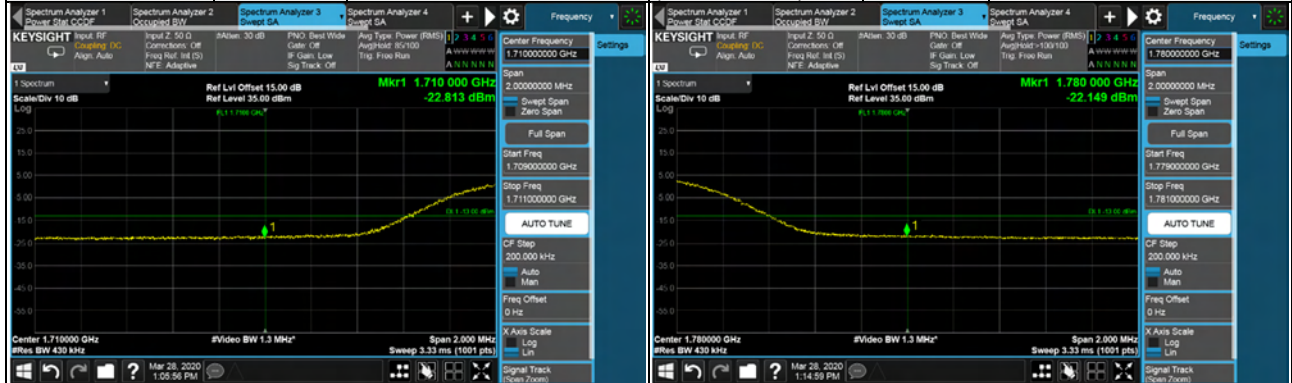


LTE Band 66 (CA 66B)
Band Edge:

Channel Bandwidth: 10MHz+10MHz

Channel 132022 (1715.0MHz)+ Channel 132121 (1724.9MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 49 RB Offset	Channel 132523 (1765.1MHz)+ Channel 132622 (1775.0MHz)	QPSK	1 RB / 0 RB Offset+ 1 RB / 49 RB Offset
---	------	--	---	------	--

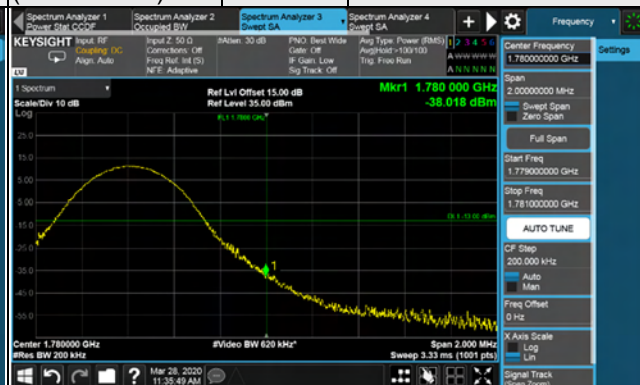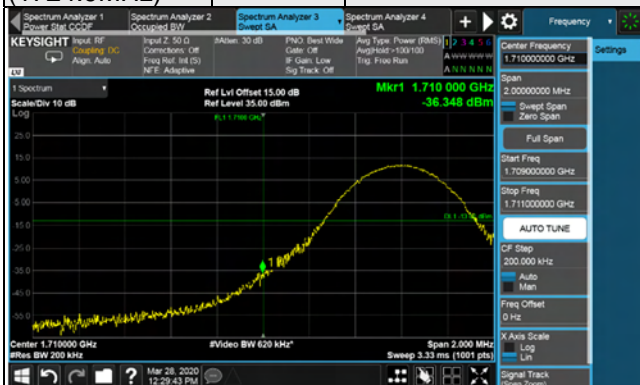

Channel 132022 (1715.0MHz)+ Channel 132121 (1724.9MHz)	QPSK	50 RB / 0 RB Offset	Channel 132523 (1765.1MHz)+ Channel 132622 (1775.0MHz)	QPSK	50 RB / 0 RB Offset
---	------	---------------------	---	------	---------------------

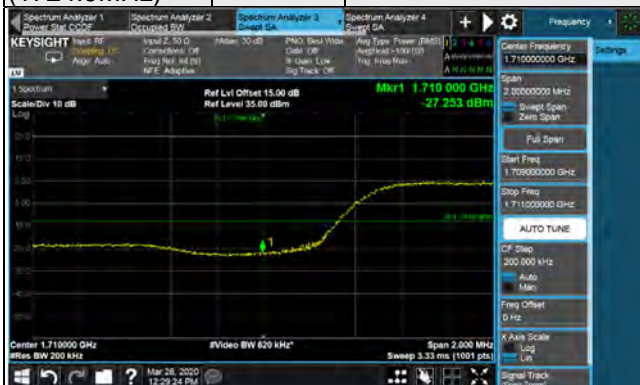


4.5 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 Test Setup

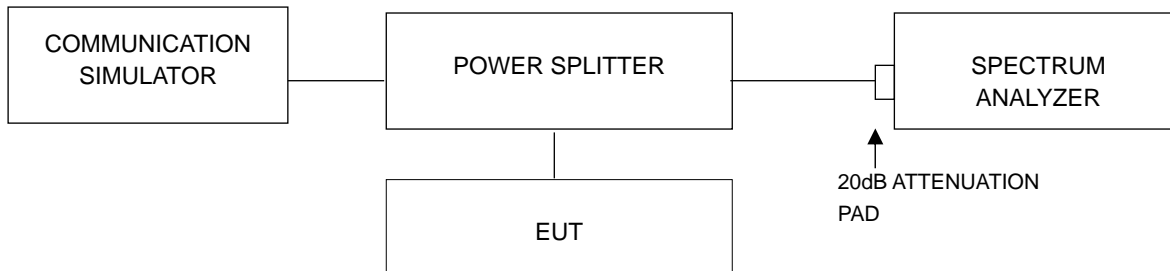


4.5.3 Test Procedures

- Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

LTE Band 7 (CA 7C)


LTE Band 7 (CA 7C), Channel Bandwidth 15MHz+20MHz		
Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		QPSK_Full RB
20828+20999	2507.8+2524.9	6.40
21003+21174	2525.3+2542.4	5.63
21179+21350	2542.9+2560.0	5.73

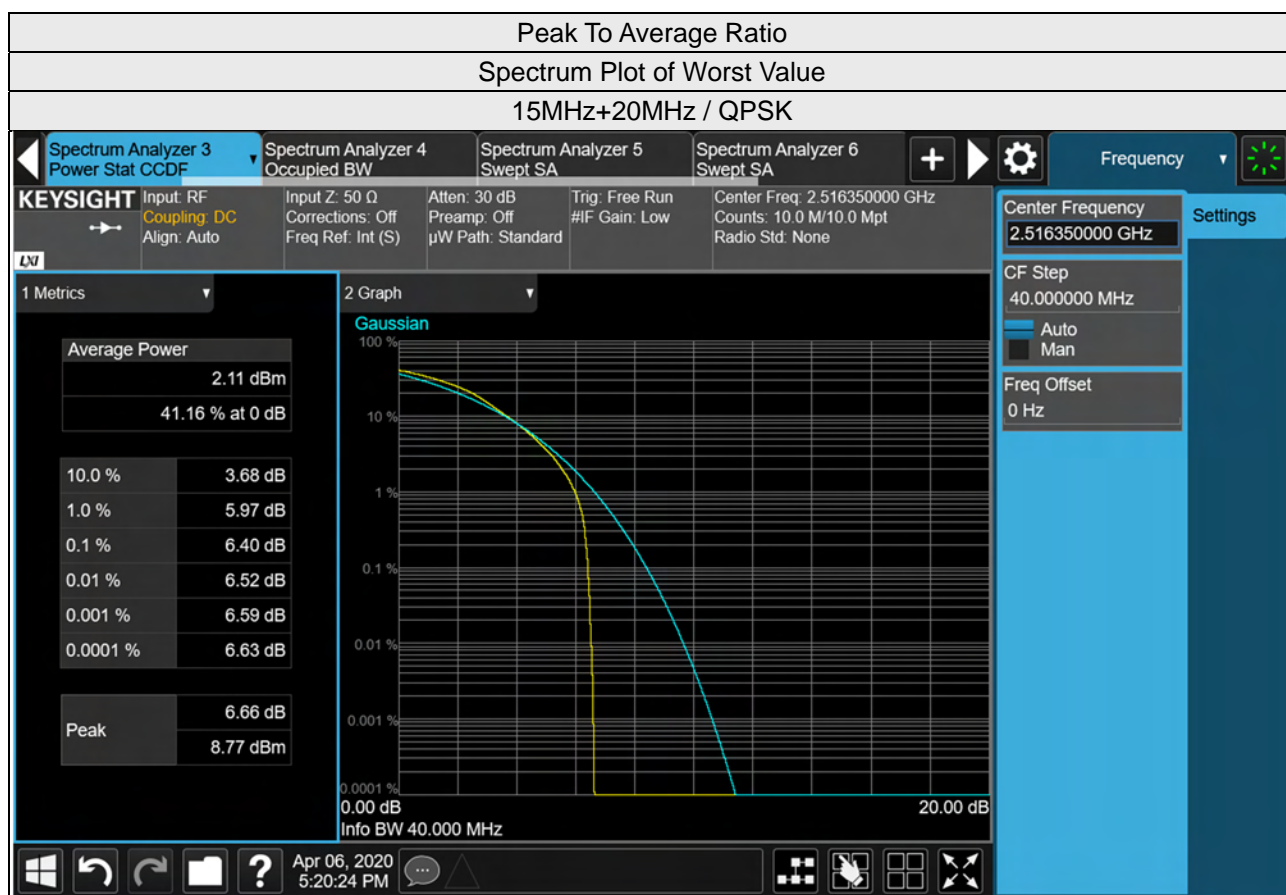

LTE Band 38 (CA 38C)

LTE Band 38 (CA 38C), Channel Bandwidth 20MHz+20MHz		
Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		QPSK_Full RB
37850+38048	2580.0+2599.8	7.12
37901+38099	2585.1+2604.9	6.97
37952+38150	2590.2+2610.0	7.00


Peak To Average Ratio
Spectrum Plot of Worst Value
20MHz+20MHz / QPSK

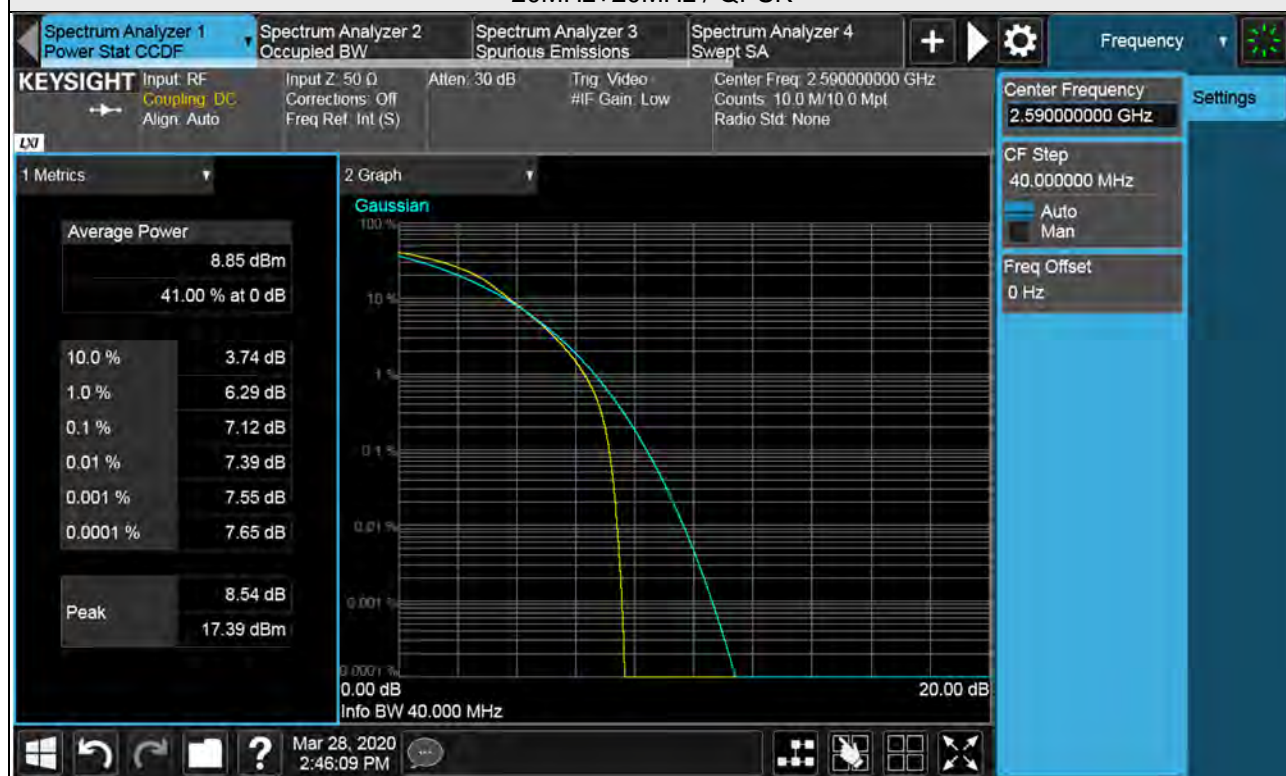

LTE Band 41 (CA 41C)

LTE Band 41 (CA 41C), Channel Bandwidth 20MHz+20MHz		
Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		QPSK_Full RB
39750+39948	2506.0+2525.8	6.96
40521+40719	2583.1+2602.9	7.69
41292+41490	2660.2+2680.0	6.95


Peak To Average Ratio
Spectrum Plot of Worst Value
20MHz+20MHz / QPSK

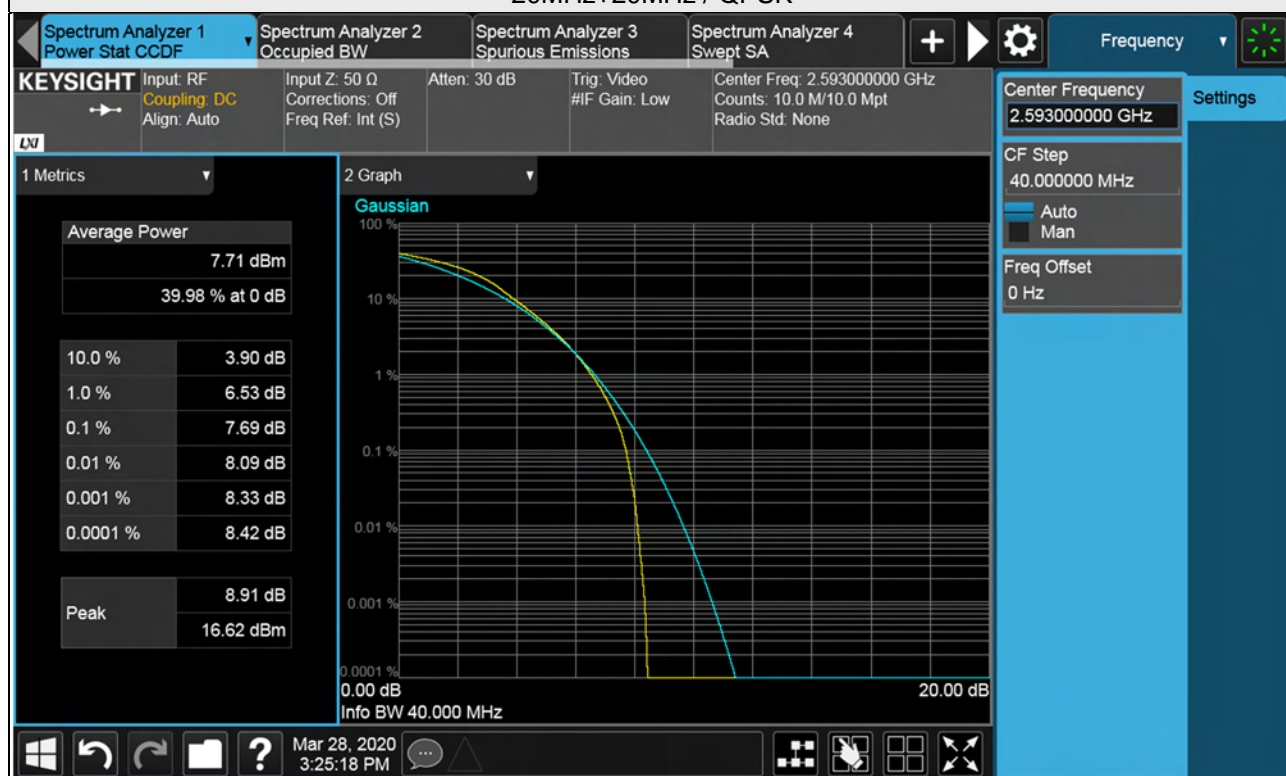

LTE Band 66 (CA 66C)

LTE Band 66 (CA 66C), Channel Bandwidth 20MHz+20MHz		
Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		QPSK_Full RB
132072+132270	1720.0+1739.8	5.99
132323+132521	1745.1+1764.9	5.91
132374+132572	1750.2+1770.0	6.53


Peak To Average Ratio
Spectrum Plot of Worst Value
20MHz+20MHz / QPSK

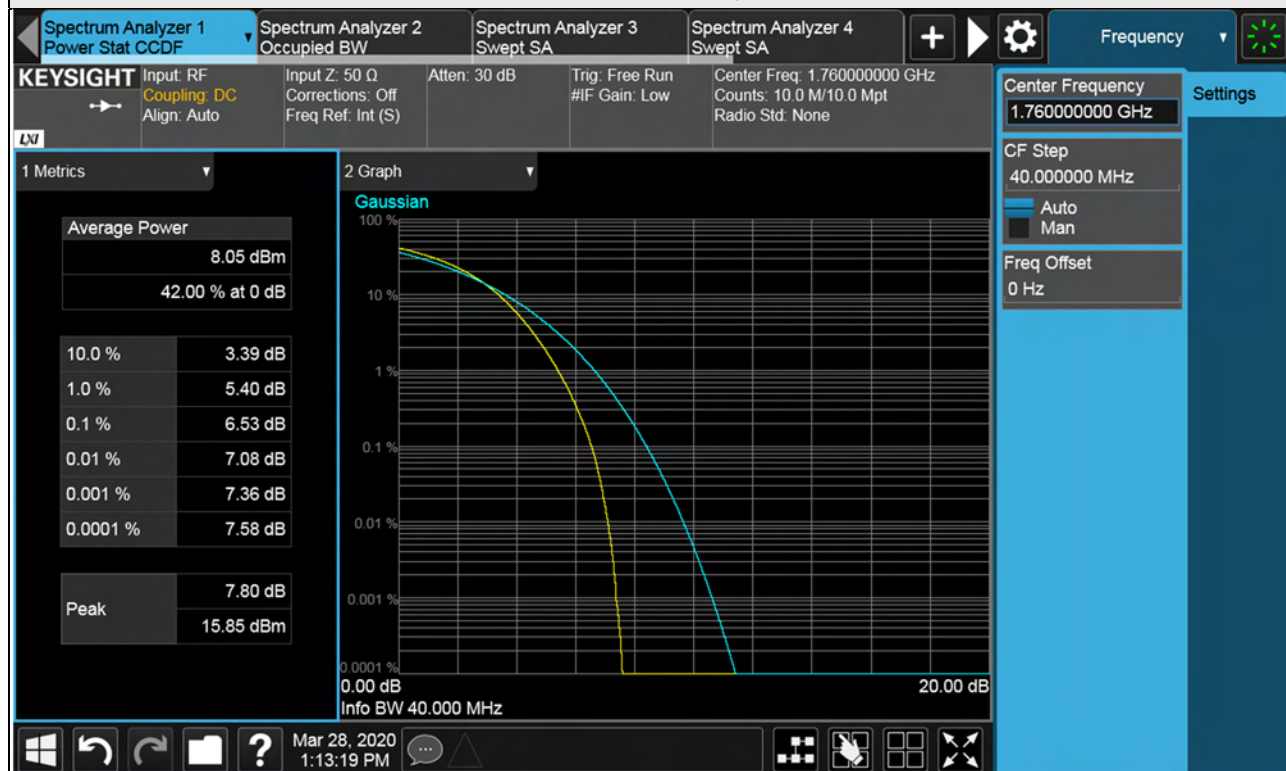

LTE Band 66 (CA 66B)

LTE Band 66 (CA 66B), Channel Bandwidth 10MHz+10MHz		
Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		QPSK_Full RB
132022+132121	1715.0+1724.9	6.75
132373+132472	1750.1+1760.0	6.84
132523+132622	1765.1+1775.0	6.32

Peak To Average Ratio
Spectrum Plot of Worst Value

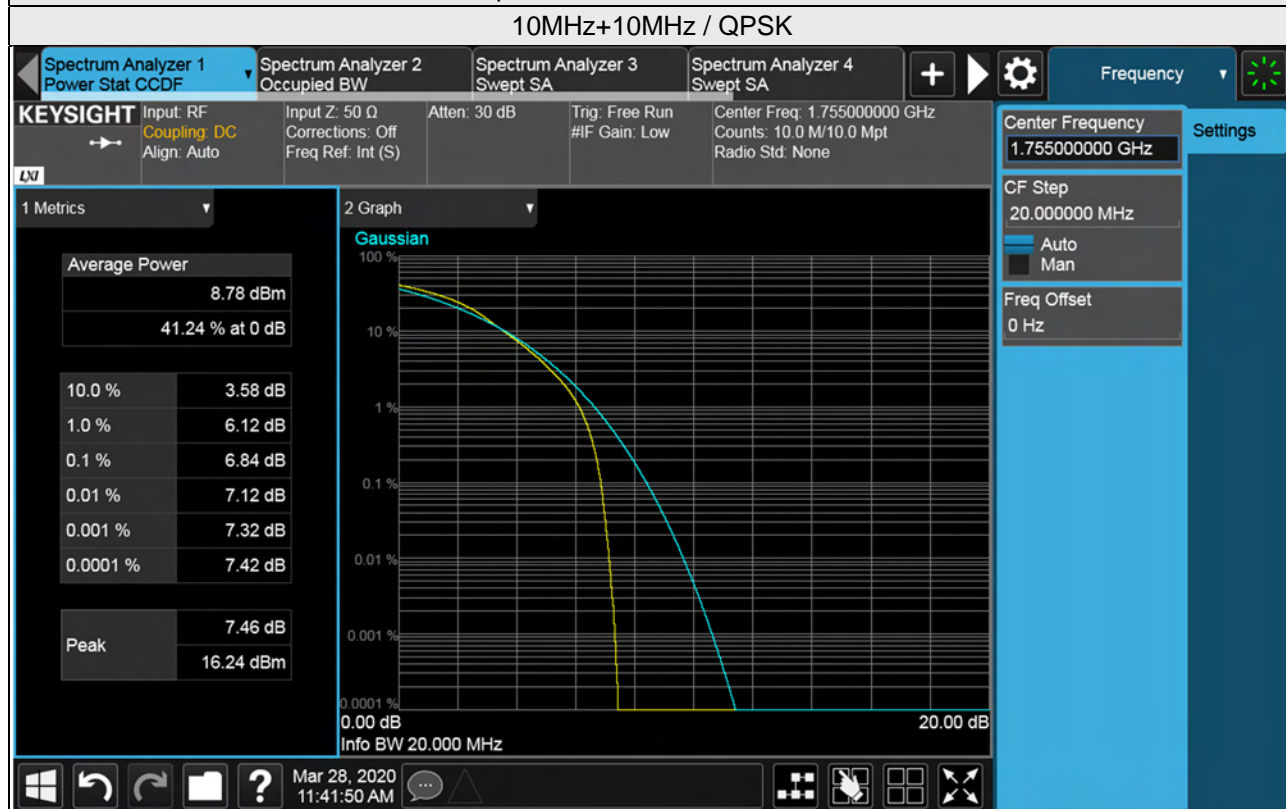

4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement


For LTE Band 66

In the FCC 27.53(h), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm .

For LTE Band 7, 38, 41

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The emission limit equal to -25dBm .

4.6.2 Test Setup

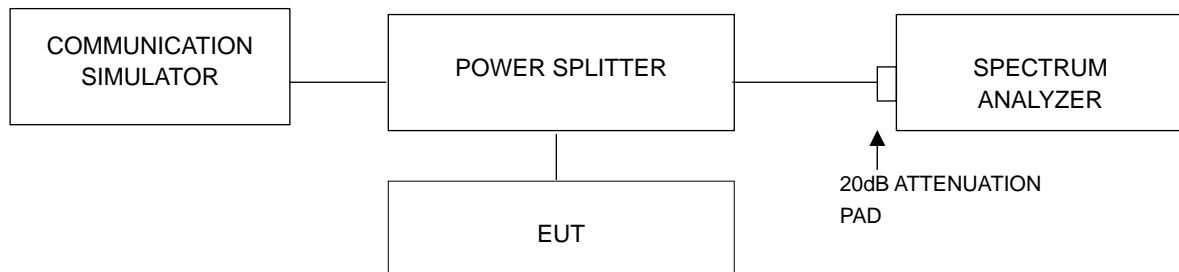

4.6.3 Test Procedure

- a. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 9kHz to 20GHz or 26.5GHz or 27GHz, it shall be connected to the attenuator with the carried frequency.

4.6.4 Test Results

LTE Band 7 (CA 7C)

Channel Band width: 15MHz+20MHz

Channel 20828(2507.8MHz)+20999(2524.9MHz)

Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~26.5GHz



Channel 21003(2525.3MHz)+21174(2542.4MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~26.5GHz

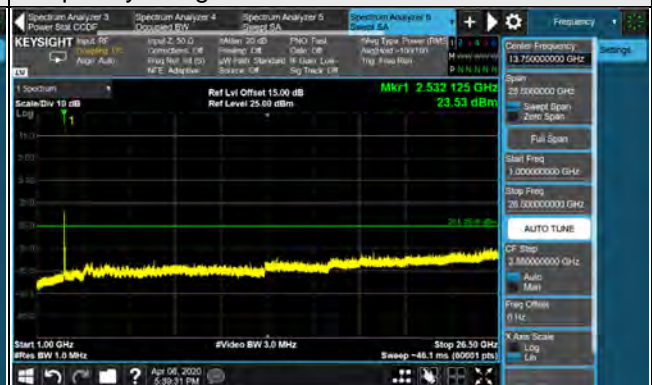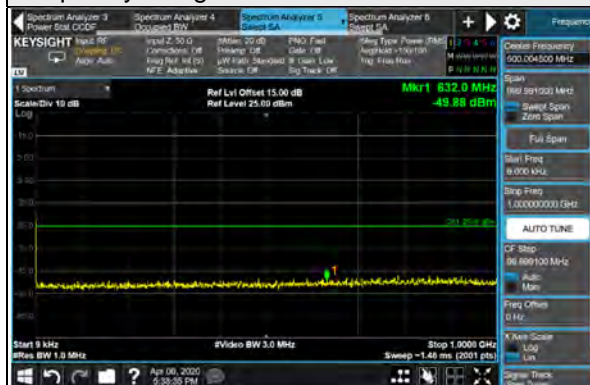

Channel 21179(2542.9MHz)+21350(2560.0MHz)

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~26.5GHz



LTE Band 38 (CA 38C)

Channel Band width: 20MHz+20MHz

Channel 37850(2580.0MHz)+38048(2599.8MHz)

Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~26.5GHz



Channel 37901(2585.1MHz)+38099(2604.9MHz)

Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~26.5GHz



Channel 37952(2590.2MHz)+38150(2610.0MHz)

Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~26.5GHz




LTE Band 41 (CA 41C)

Channel Band width: 20MHz+20MHz

Channel 39750(2506.0MHz)+39948(2525.8MHz)

Frequency Range : 9kHz~1GHz

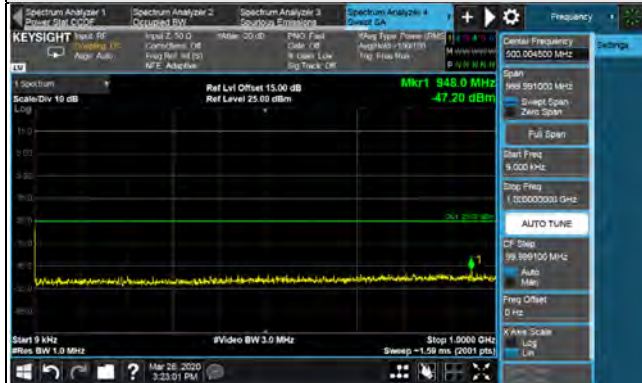


Frequency Range : 1GHz~27GHz




Channel 40521(2583.1MHz)+40719(2602.9MHz)

Frequency Range : 9kHz~1GHz

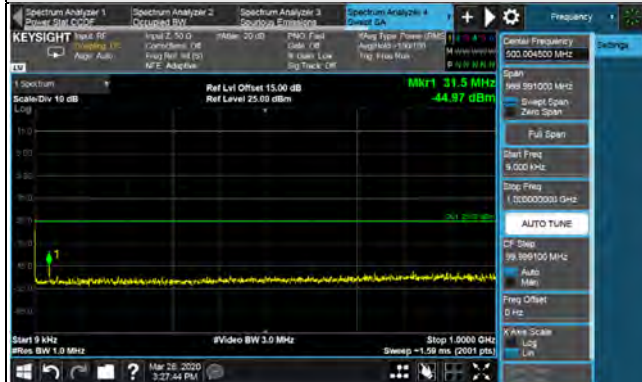


Frequency Range : 1GHz~27GHz

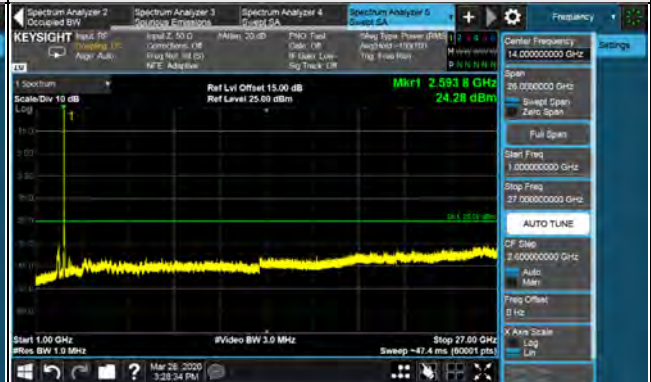

Channel 41292(2660.2MHz)+41490(2680.0MHz)

Frequency Range : 9kHz~1GHz

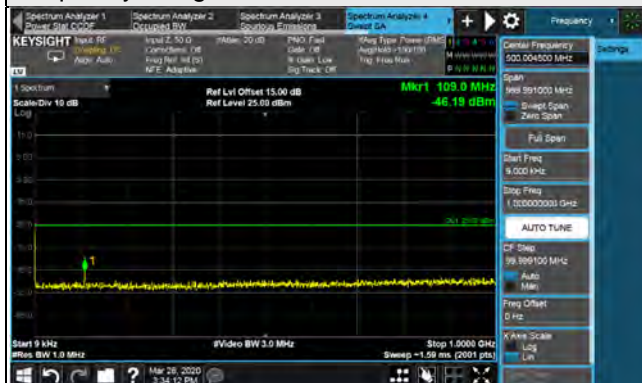

Frequency Range : 1GHz~27GHz



LTE Band 66 (CA 66C)


Channel Band width: 20MHz+20MHz

Channel 132072(1720.0MHz)+132270(1739.8MHz)

Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~20GHz

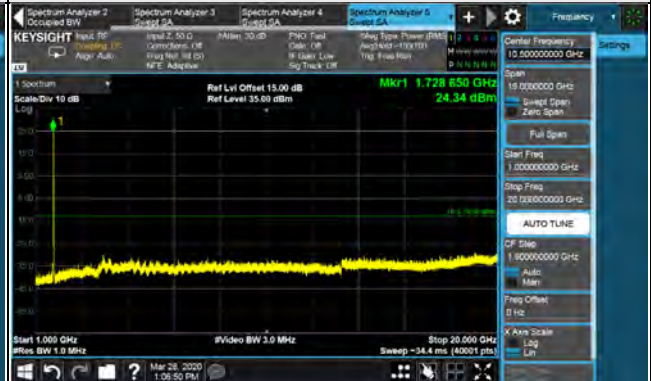


Channel 132323(1745.1MHz)+132521(1764.9MHz)

Frequency Range : 9kHz~1GHz




Frequency Range : 1GHz~20GHz

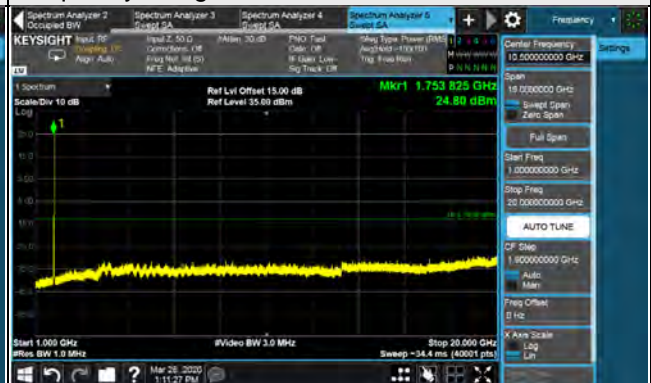


Channel 132374(1750.2MHz)+132572(1770.0MHz)

Frequency Range : 9kHz~1GHz

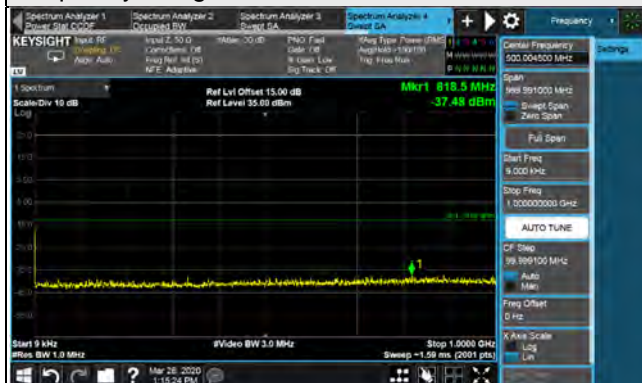

Frequency Range : 1GHz~20GHz

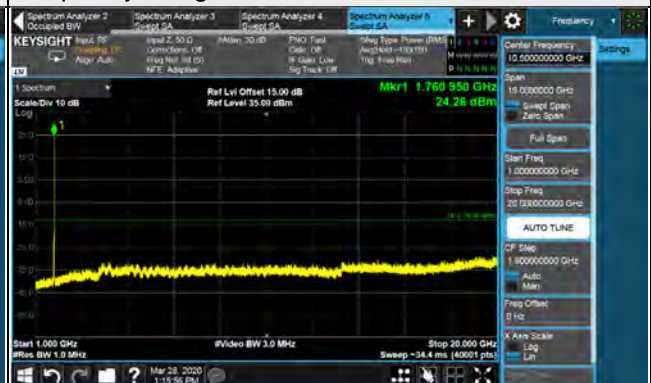


LTE Band 66 (CA 66B)

Channel Band width: 10MHz+10MHz

Channel 132022(1715.0MHz)+132121(1724.9MHz)

Frequency Range : 9kHz~1GHz

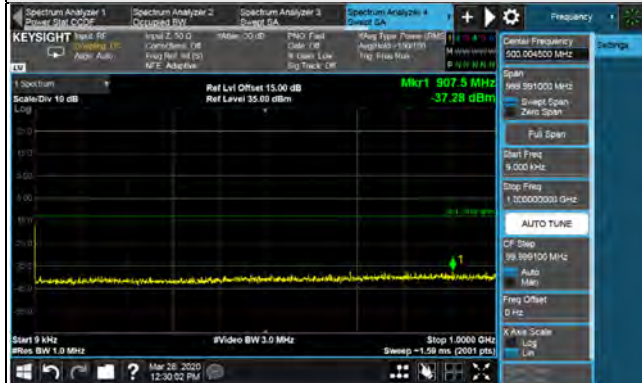

Frequency Range : 1GHz~20GHz




Channel 132373(1750.1MHz)+132472(1760.0MHz)

Frequency Range : 9kHz~1GHz




Frequency Range : 1GHz~20GHz

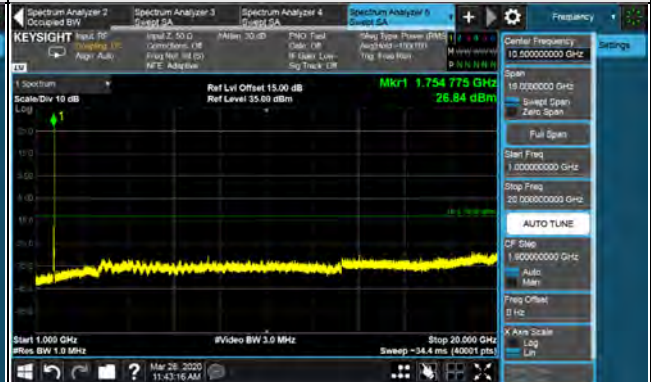


Channel 132523(1765.1MHz)+132622(1775.0MHz)

Frequency Range : 9kHz~1GHz

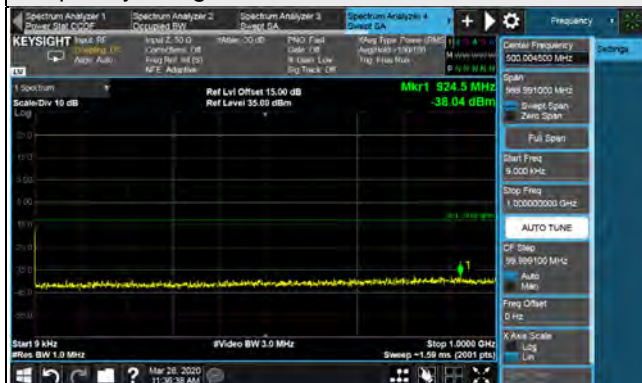

Frequency Range : 1GHz~20GHz

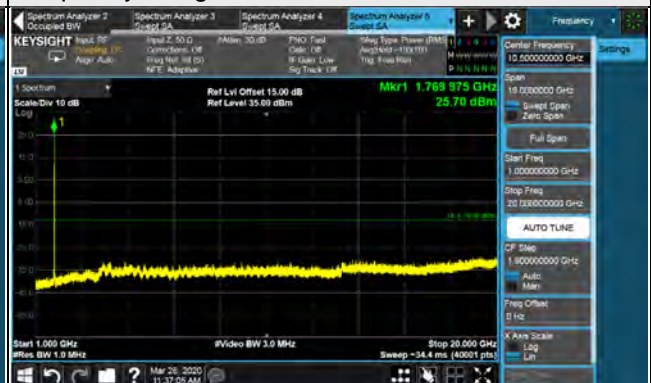

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

For LTE Band 66

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.

For LTE Band 7, 38, 41

In the FCC 27.53(m) (4)(6), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The emission limit equal to -25dBm .

4.7.2 Test Procedure

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}$.


Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard


No deviation.

4.7.4 Test Setup

For radiated emission 30MHz to 1GHz

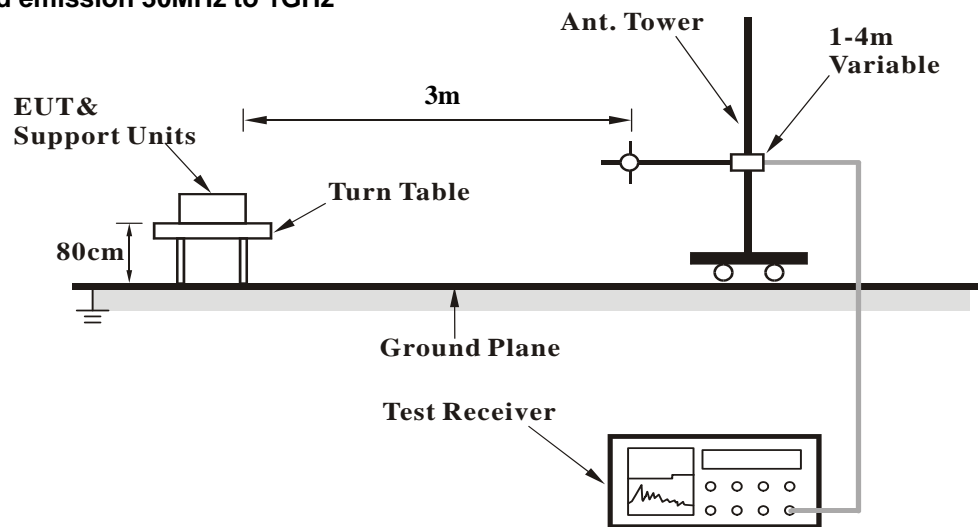

For radiated emission above 1GHz

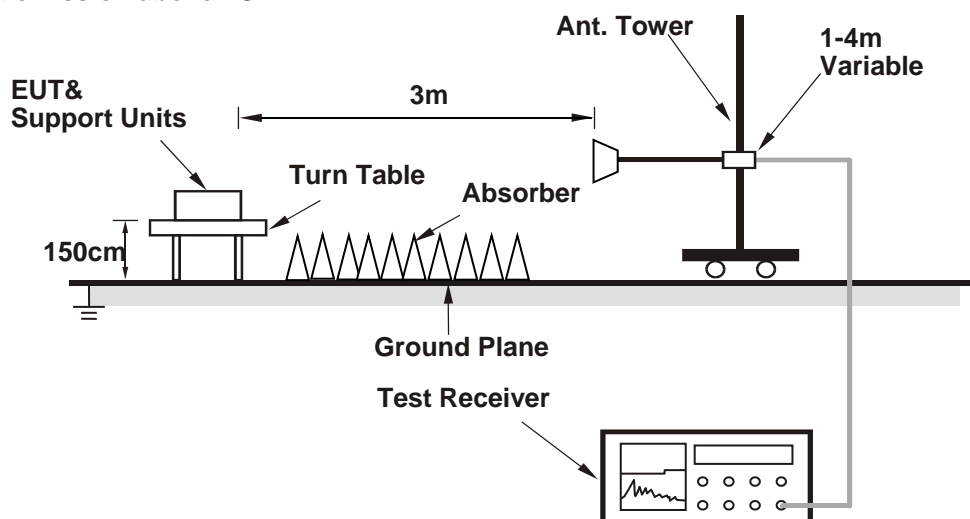

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results


Below 1GHz
LTE Band 7 (CA 7C)

Mode	TX channel 20828 (2507.8MHz)+ TX channel 20999 (2524.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	34.85	-58.0	-38.4	-16.5	-54.9	-25.0	-29.9
2	90.14	-39.5	-47.3	-0.2	-47.5	-25.0	-22.5
3	128.94	-56.3	-59.3	-3.2	-62.5	-25.0	-37.5
4	275.41	-61.4	-64.2	-1.6	-65.8	-25.0	-40.8
5	613.94	-69.7	-71.4	3.7	-67.7	-25.0	-42.7
6	830.25	-70.4	-67.3	3.9	-63.4	-25.0	-38.4

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

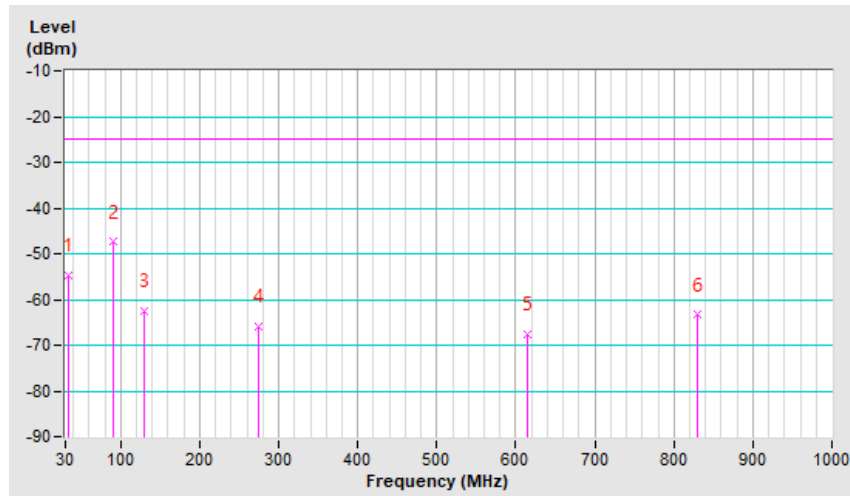


Mode	TX channel 20828 (2507.8MHz)+ TX channel 20999 (2524.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-44.1	-34.6	-19.4	-54.0	-25.0	-29.0
2	78.50	-54.9	-60.7	0.6	-60.1	-25.0	-35.1
3	127.97	-59.6	-61.9	-3.2	-65.1	-25.0	-40.1
4	268.62	-63.0	-59.8	-1.5	-61.3	-25.0	-36.3
5	664.38	-69.9	-68.0	3.6	-64.4	-25.0	-39.4
6	929.19	-69.7	-64.7	3.7	-61.0	-25.0	-36.0

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

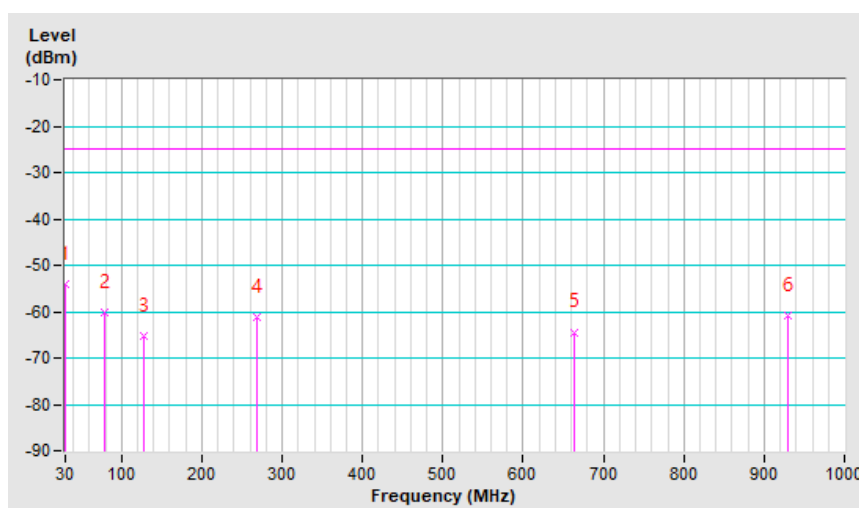


LTE Band 38 (CA 38C)

Mode	TX channel 37952 (2590.2MHz)+ TX channel 38150 (2610.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-51.3	-27.9	-19.4	-47.3	-25.0	-22.3
2	79.47	-42.1	-47.6	0.6	-47.0	-25.0	-22.0
3	271.53	-60.6	-63.4	-1.4	-64.8	-25.0	-39.8
4	583.87	-69.8	-72.4	3.8	-68.6	-25.0	-43.6
5	751.68	-68.0	-67.7	3.7	-64.0	-25.0	-39.0
6	944.71	-70.2	-65.6	3.7	-61.9	-25.0	-36.9

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

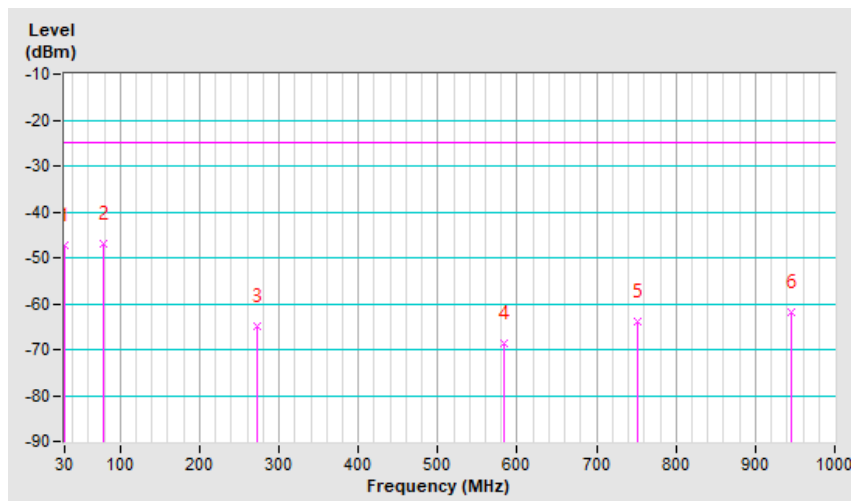


Mode	TX channel 37952 (2590.2MHz)+ TX channel 38150 (2610.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	35.82	-50.2	-44.0	-15.9	-59.9	-25.0	-34.9
2	82.38	-59.2	-64.1	0.4	-63.7	-25.0	-38.7
3	191.99	-65.8	-64.8	-2.6	-67.4	-25.0	-42.4
4	306.45	-64.2	-68.0	3.9	-64.1	-25.0	-39.1
5	612.00	-70.6	-69.6	3.7	-65.9	-25.0	-40.9
6	774.96	-68.9	-65.8	4.0	-61.8	-25.0	-36.8

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

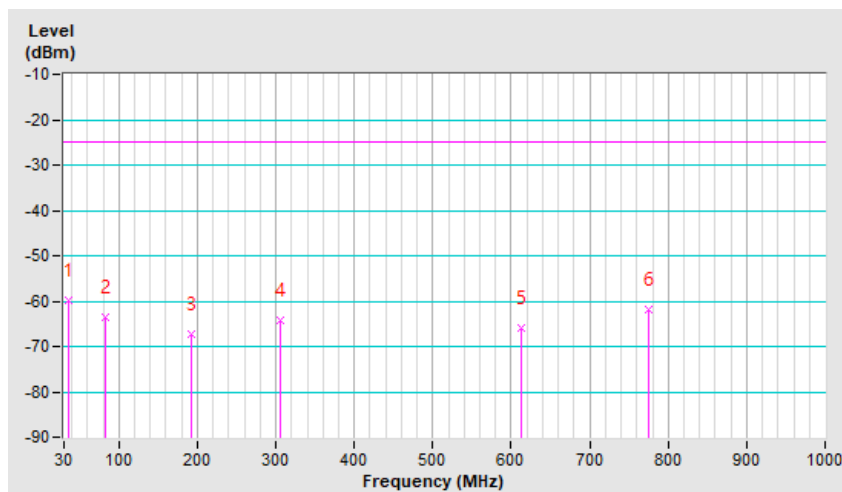


LTE Band 41 (CA 41C)

Mode	TX channel 41292 (2660.2MHz)+ TX channel 41490 (2680.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-50.3	-26.9	-19.4	-46.3	-25.0	-21.3
2	81.41	-44.7	-50.3	0.5	-49.8	-25.0	-24.8
3	275.41	-60.6	-63.4	-1.6	-65.0	-25.0	-40.0
4	333.61	-64.7	-72.5	4.0	-68.5	-25.0	-43.5
5	596.48	-69.6	-71.9	3.8	-68.1	-25.0	-43.1
6	831.22	-70.9	-67.9	3.9	-64.0	-25.0	-39.0

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

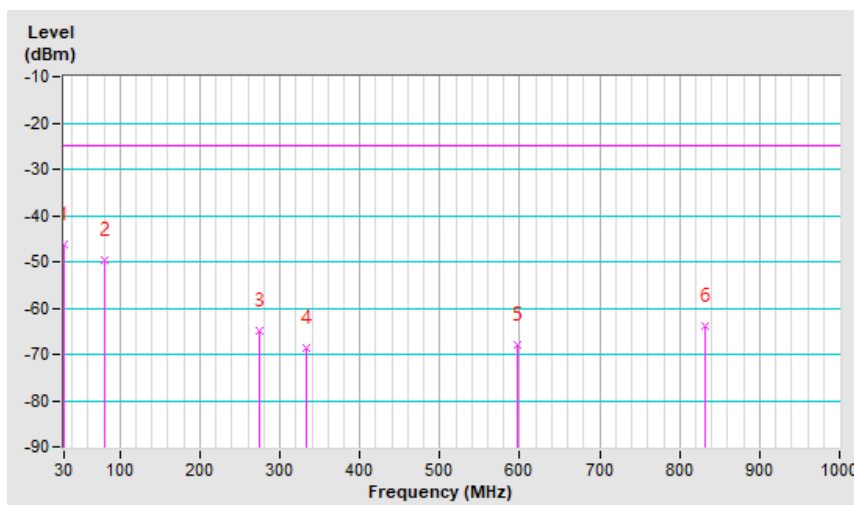


Mode	TX channel 41292 (2660.2MHz)+ TX channel 41490 (2680.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.97	-49.4	-40.8	-18.8	-59.6	-25.0	-34.6
2	56.19	-33.1	-34.9	-5.1	-40.0	-25.0	-15.0
3	272.50	-66.2	-62.3	-1.5	-63.8	-25.0	-38.8
4	442.25	-66.0	-69.6	3.4	-66.2	-25.0	-41.2
5	776.90	-69.8	-66.7	4.0	-62.7	-25.0	-37.7
6	943.74	-70.2	-64.8	3.7	-61.1	-25.0	-36.1

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

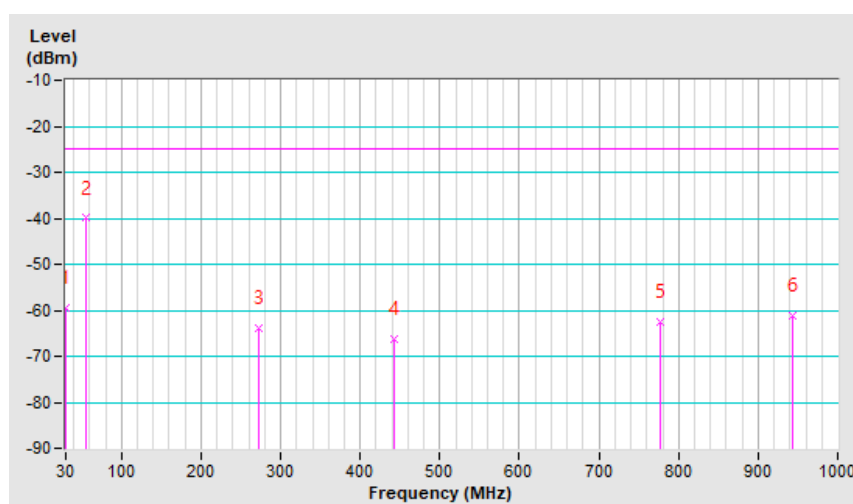


LTE Band 66 (CA 66C)

Mode	TX channel 132323 (1745.1MHz)+ TX channel 132521 (1764.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-52.2	-28.8	-19.4	-48.2	-13.0	-35.2
2	85.29	-38.8	-45.5	0.3	-45.2	-13.0	-32.2
3	128.94	-43.2	-46.2	-3.2	-49.4	-13.0	-36.4
4	279.29	-56.7	-59.5	-1.6	-61.1	-13.0	-48.1
5	777.87	-67.0	-66.0	4.0	-62.0	-13.0	-49.0
6	943.74	-70.4	-65.8	3.7	-62.1	-13.0	-49.1

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

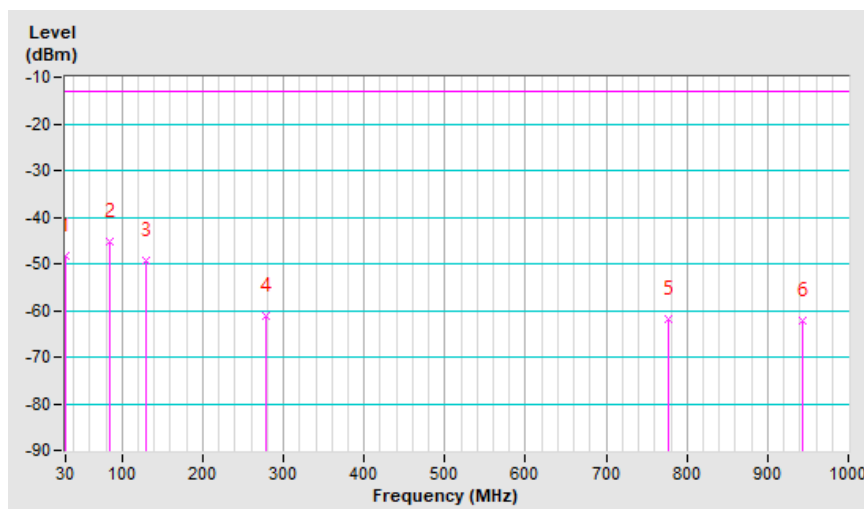


Mode	TX channel 132323 (1745.1MHz)+ TX channel 132521 (1764.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	56.19	-47.7	-49.5	-5.1	-54.6	-13.0	-41.6
2	84.32	-51.7	-57.1	0.4	-56.7	-13.0	-43.7
3	145.43	-57.5	-56.4	-3.1	-59.5	-13.0	-46.5
4	271.53	-66.7	-63.1	-1.4	-64.5	-13.0	-51.5
5	619.76	-70.5	-69.4	3.7	-65.7	-13.0	-52.7
6	944.71	-69.5	-64.0	3.7	-60.3	-13.0	-47.3

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

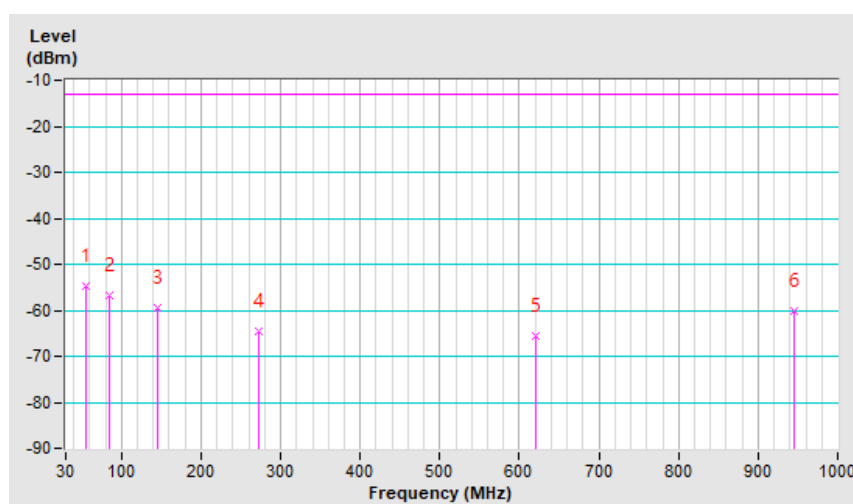


LTE Band 66 (CA 66B)

Mode	TX channel 132022 (1715.0MHz)+ TX channel 132121 (1724.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	55.22	-47.3	-44.5	-5.4	-49.9	-13.0	-36.9
2	80.44	-44.0	-49.4	0.5	-48.9	-13.0	-35.9
3	194.90	-56.0	-61.9	-2.6	-64.5	-13.0	-51.5
4	296.75	-62.8	-63.8	-1.8	-65.6	-13.0	-52.6
5	787.57	-69.6	-68.3	4.0	-64.3	-13.0	-51.3
6	997.09	-71.2	-65.6	3.3	-62.3	-13.0	-49.3

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

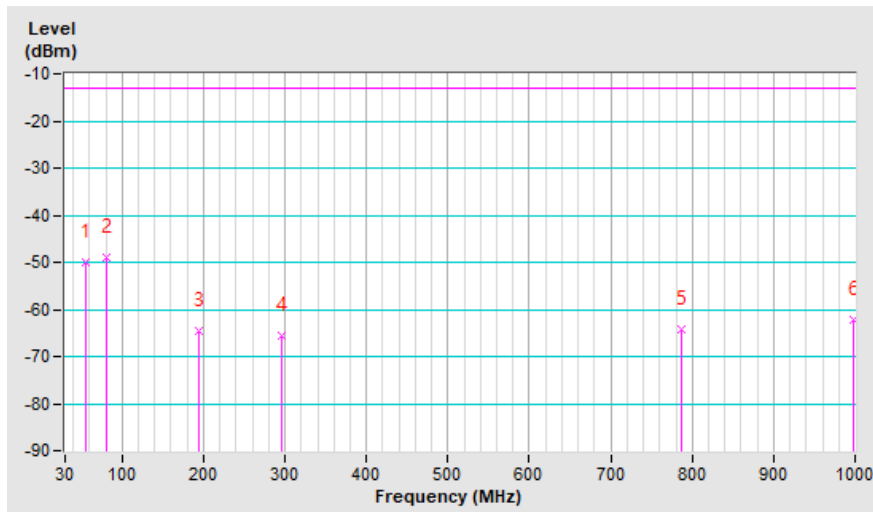


Mode	TX channel 132022 (1715.0MHz)+ TX channel 132121 (1724.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.97	-49.8	-41.2	-18.8	-60.0	-13.0	-47.0
2	80.44	-58.1	-63.3	0.5	-62.8	-13.0	-49.8
3	306.45	-67.1	-70.9	3.9	-67.0	-13.0	-54.0
4	599.39	-70.8	-71.0	3.8	-67.2	-13.0	-54.2
5	704.15	-71.3	-68.9	3.5	-65.4	-13.0	-52.4
6	895.24	-71.8	-67.0	3.5	-63.5	-13.0	-50.5

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

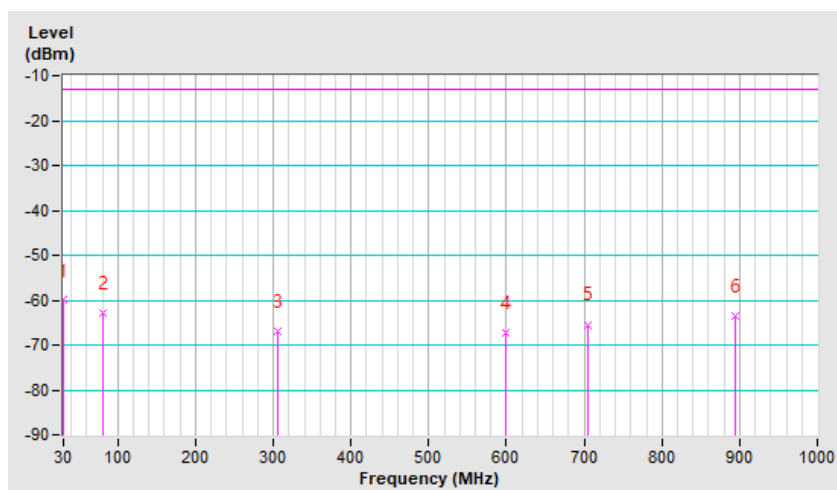

Above 1GHz
LTE Band 7 (CA 7C)

Mode	TX channel 20828 (2507.8MHz)+ TX channel 20999 (2524.9MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5035.00	-63.3	-50.9	1.4	-49.5	-25.0	-24.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5035.00	-58.6	-47.4	1.4	-46.0	-25.0	-21.0

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 21003 (2525.3MHz)+ TX channel 21174 (2542.4MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-63.7	-51.2	1.4	-49.8	-25.0	-24.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-59.6	-48.2	1.4	-46.8	-25.0	-21.8

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 21179 (2542.9MHz)+ TX channel 21350 (2560.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5105.00	-63.5	-51.0	1.4	-49.6	-25.0	-24.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5105.00	-59.1	-47.4	1.4	-46.0	-25.0	-21.0

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 38 (CA 38C)

Mode	TX channel 37850 (2580.0MHz)+ TX channel 38048 (2599.8MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5180.00	-60.9	-49.1	1.4	-47.7	-25.0	-22.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5180.00	-59.1	-47.0	1.4	-45.6	-25.0	-20.6

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 37901 (2585.1MHz)+ TX channel 38099 (2604.9MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-61.0	-49.3	1.4	-47.9	-25.0	-22.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-58.2	-46.0	1.4	-44.6	-25.0	-19.6

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 37952 (2590.2MHz)+ TX channel 38150 (2610.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5200.00	-61.5	-49.9	1.4	-48.5	-25.0	-23.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5200.00	-58.8	-46.5	1.4	-45.1	-25.0	-20.1

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 41 (CA 41C)

Mode	TX channel 39750 (2506.0MHz)+ TX channel 39948 (2525.8MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5032.00	-63.5	-51.1	1.4	-49.7	-25.0	-24.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5032.00	-58.2	-47.0	1.4	-45.6	-25.0	-20.6

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 40521 (2583.1MHz)+ TX channel 40719 (2602.9MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-63.1	-51.4	1.4	-50.0	-25.0	-25.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-57.8	-45.6	1.4	-44.2	-25.0	-19.2

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 41292 (2660.2MHz)+ TX channel 41490 (2680.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5340.00	-62.9	-50.8	1.4	-49.4	-25.0	-24.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5340.00	-58.4	-47.0	1.4	-45.6	-25.0	-20.6

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 66 (CA 66C)

Mode	TX channel 132072 (1720.0MHz)+ TX channel 132270 (1739.8MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3460.00	-63.6	-55.2	1.4	-53.8	-13.0	-40.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3460.00	-62.4	-54.6	1.4	-53.2	-13.0	-40.2

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 132323 (1745.1MHz)+ TX channel 132521 (1764.9MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-64.4	-56.1	1.4	-54.7	-13.0	-41.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-62.6	-54.9	1.4	-53.5	-13.0	-40.5

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 132374 (1750.2MHz)+ TX channel 132572 (1770.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3520.00	-63.7	-55.4	1.4	-54.0	-13.0	-41.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3520.00	-62.8	-55.1	1.4	-53.7	-13.0	-40.7

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 66 (CA 66B)

Mode	TX channel 132022 (1715.0MHz)+ TX channel 132121 (1724.9MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3440.00	-64.0	-55.5	1.3	-54.2	-13.0	-41.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3440.00	-62.5	-54.5	1.3	-53.2	-13.0	-40.2

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 132373 (1750.1MHz)+ TX channel 132472 (1760.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-64.4	-56.1	1.4	-54.7	-13.0	-41.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-62.2	-54.5	1.4	-53.1	-13.0	-40.1

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 132523 (1765.1MHz)+ TX channel 132622 (1775.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3540.00	-64.3	-55.9	1.4	-54.5	-13.0	-41.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3540.00	-63.0	-55.2	1.4	-53.8	-13.0	-40.8

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---