

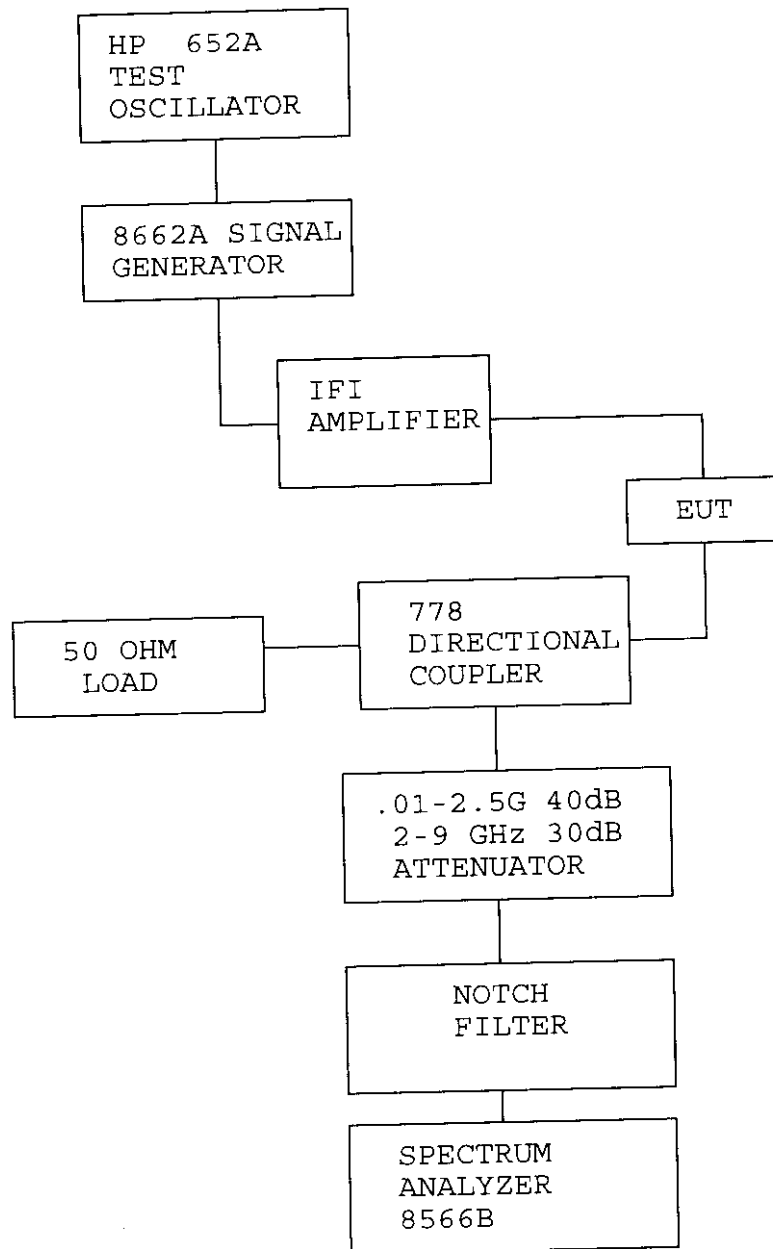


FIGURE 2. BLOCK DIAGRAM.
(POWER INPUT/OUTPUT TESTS)

2.983(e) **Test Data**

Refer to 2.983(e)(1) through 2.983(e)(7)

2.983(e)(1) **Measurement of RF Power Output per 2.985**

Definition: For RF Power Amplifiers.

Test Method: See Figure 2.

Output power is measured across a precision 50 ohm load with a wide-band sampling RF voltmeter.

Test Results:

Frequency	POWER OUTPUT		
	Nominal Voltage 115 VAC	85% Voltage 97.75 VDC	115% Voltage 132.25 VDC
851 MHz	250.0 W	250.0 W	250.0 W
862 MHz	250.0 W	250.0 W	250.0 W
866 MHz	250.0 W	250.0 W	250.0 W

2.983 (e) (2) **Measurement of Modulation Characteristics per
2.987(b)(1)**

This EUT is a power amplifier and contains no circuitry to modify the RF signal provided by the driver except to raise the power level.

2.983(e) (3) **Measurement of Occupied Bandwidth per 2.989**

Definition: Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean power radiated by a given emission.

Test Method: Connect the equipment per Figure 3.

Measurements were made with the modulating signal at 2.5 kHz with 5 kHz of FM deviation.

Test Results: See Plots following Figure 3.

The center frequency of the signal did not shift with modulation. The spectrum bandwidth was well within the limits specified in the FCC regulations

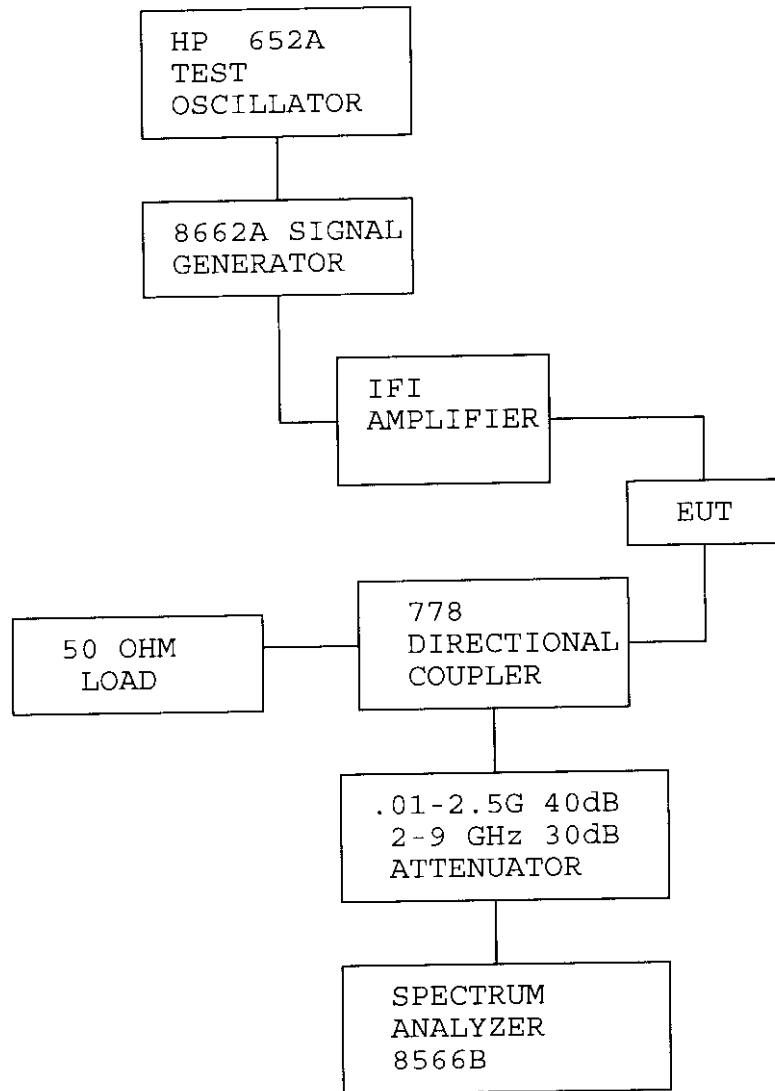


FIGURE 3. BLOCK DIAGRAM.
(OCCUPIED BANDWIDTH)

PA8-2EG-HMS
UNMODULATED CARRIER

MKR 851.000 0 MHz
53.90 dBm

ATTEN 20 dB

REF 68.0 dBm

h_p

10 dB/

POS PK

OFFSET

67.5

dB

MARKER

851.000 0 MHz

53.90 dBm

DL

54.0

dBm

SPAN 100 kHz
SWP 3.00 sec

VBW 1 kHz

CENTER 851.000 MHz
RES BW 300 Hz

PAGE - 2 EGG - HMS OCCUPIED BANDWIDTH PART 22

250 WATTS

MKR 851.000 0 MHz
42.20 dBm

ATTEN 20 dB

REF 68.0 dBm

HP

10 dB/

POS PK

OFFSET

67.5


dB

DL

54.0

dBm

FAC LIMIT

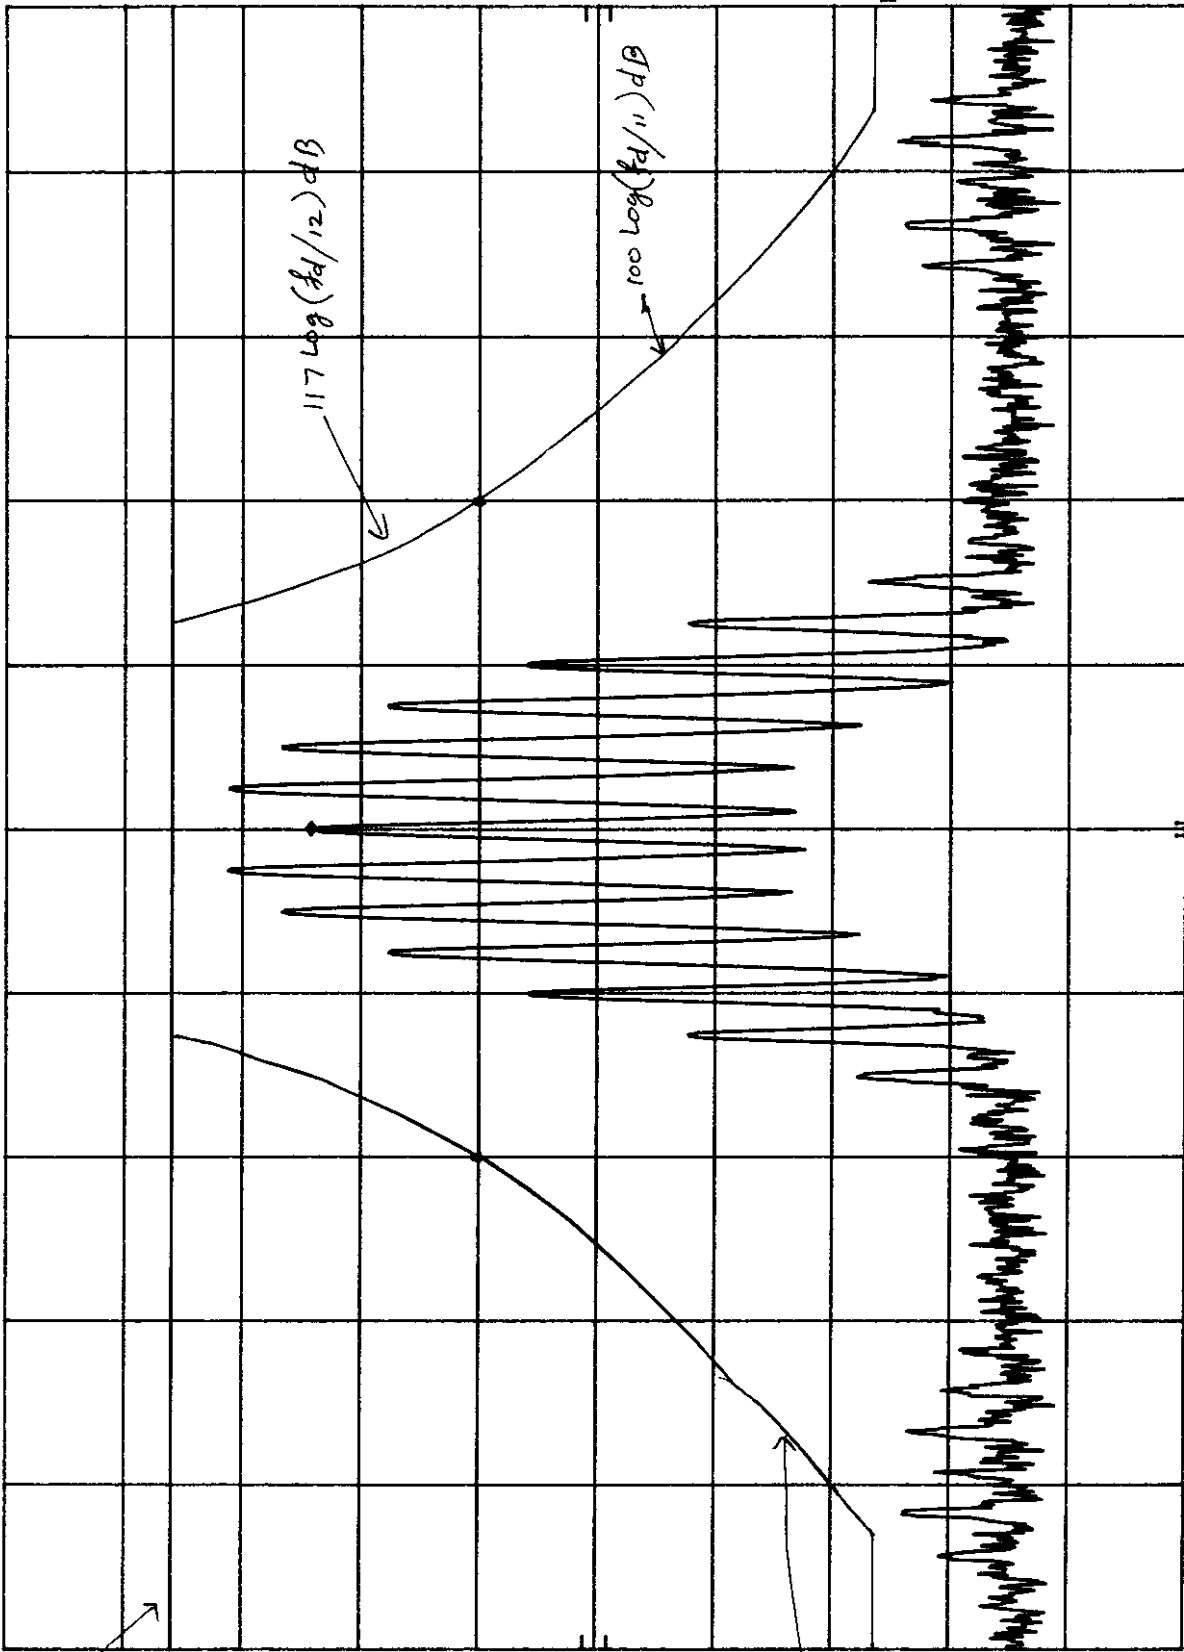

CENTER 851.000 MHz
RES BW 300 Hz
VBW 1 kHz
SPAN 100 kHz
SWP 3.00 sec

250 WATTS

PA8-2EG-HMS

OCCUPIED BANDWIDTH PART 90

MKR 851.000 0 MHz
42.20 dBm

REF 68.0 dBm ATTN 20 dB

HP

10 dB/

POS PK

OFFSET


67.5

dB

DL

54.0

dBm

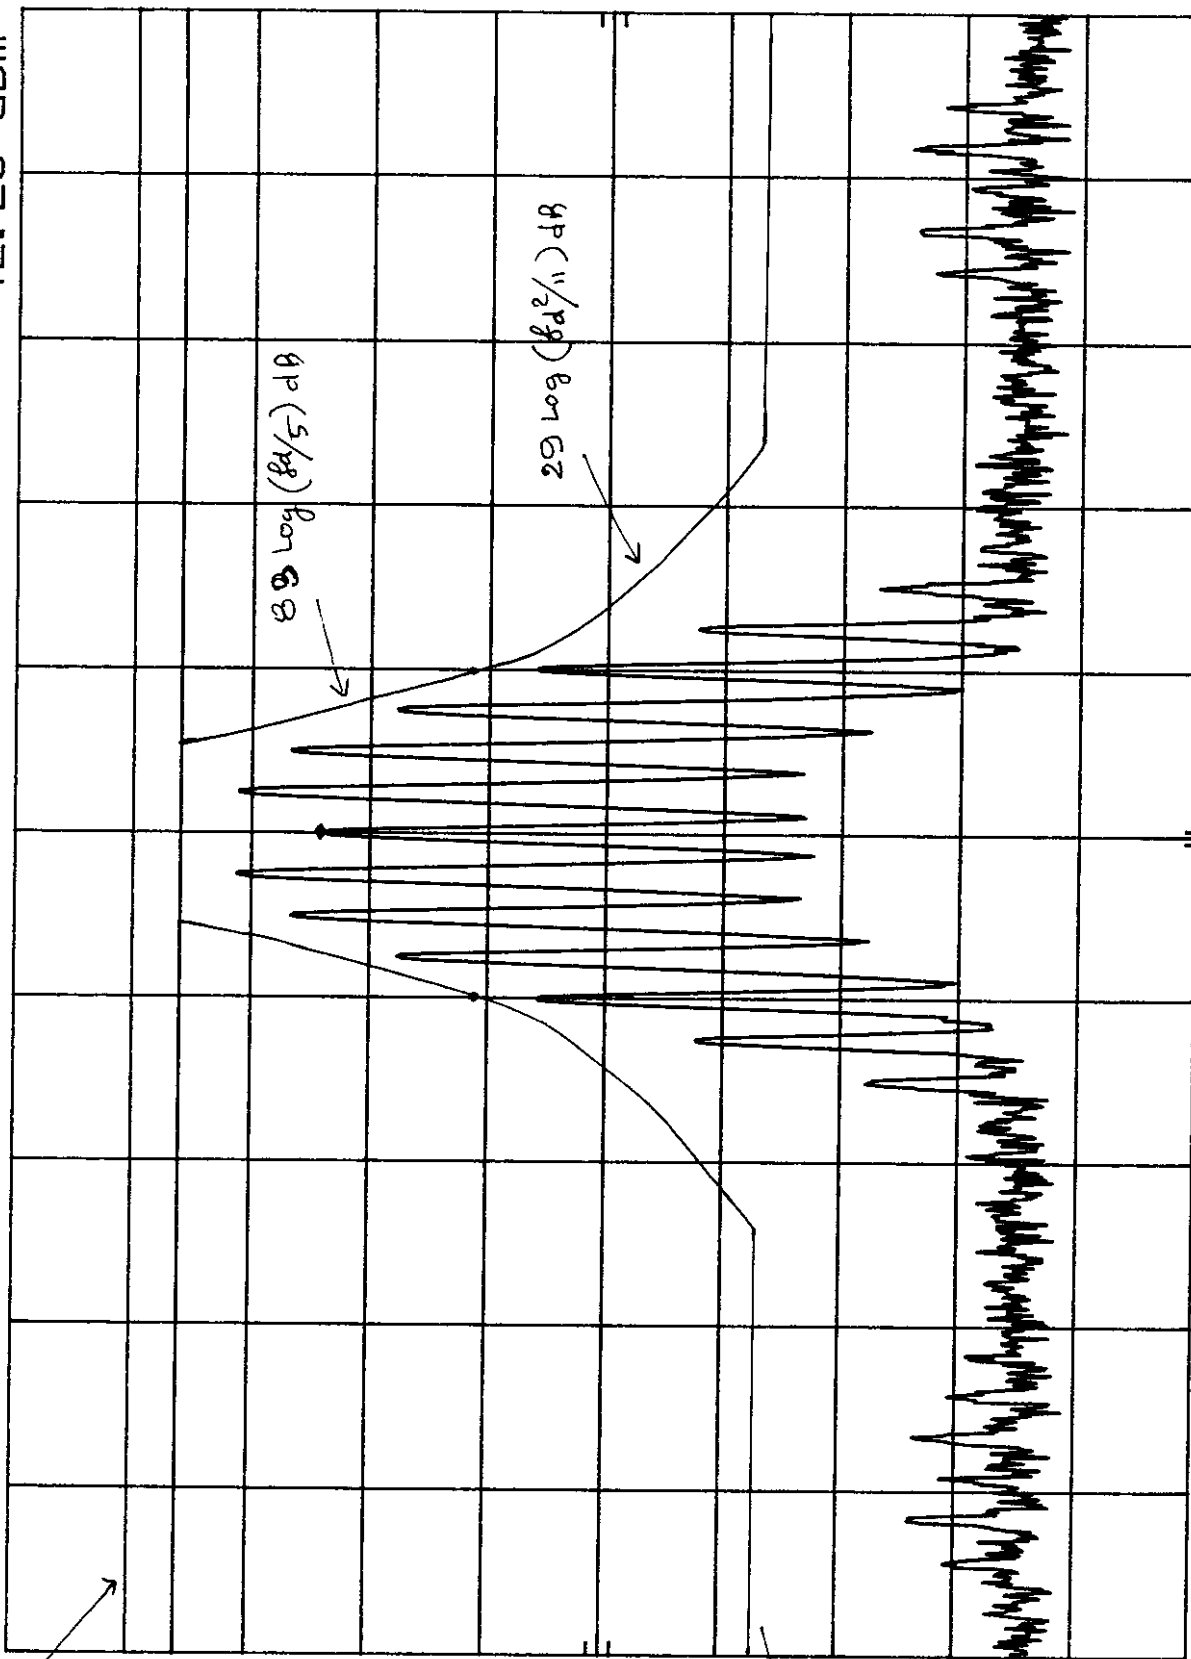

CENTER 851.000 MHz

RES BW 300 Hz

VBW 1 kHz

SPAN 100 kHz
SWP 3.00 sec

250 WATTS

PA8-2EG-HMS
UNMODULATED CARRIER

MKR 862.000 0 MHz
53.70 dBm

h_p

REF 68.0 dBm

ATTEN 20 dB

10 dB

POS PK

OFFSET

67.5

dB

DL


54.0

dBm

MARKER

862.000 0 MHz

53.70 dBm

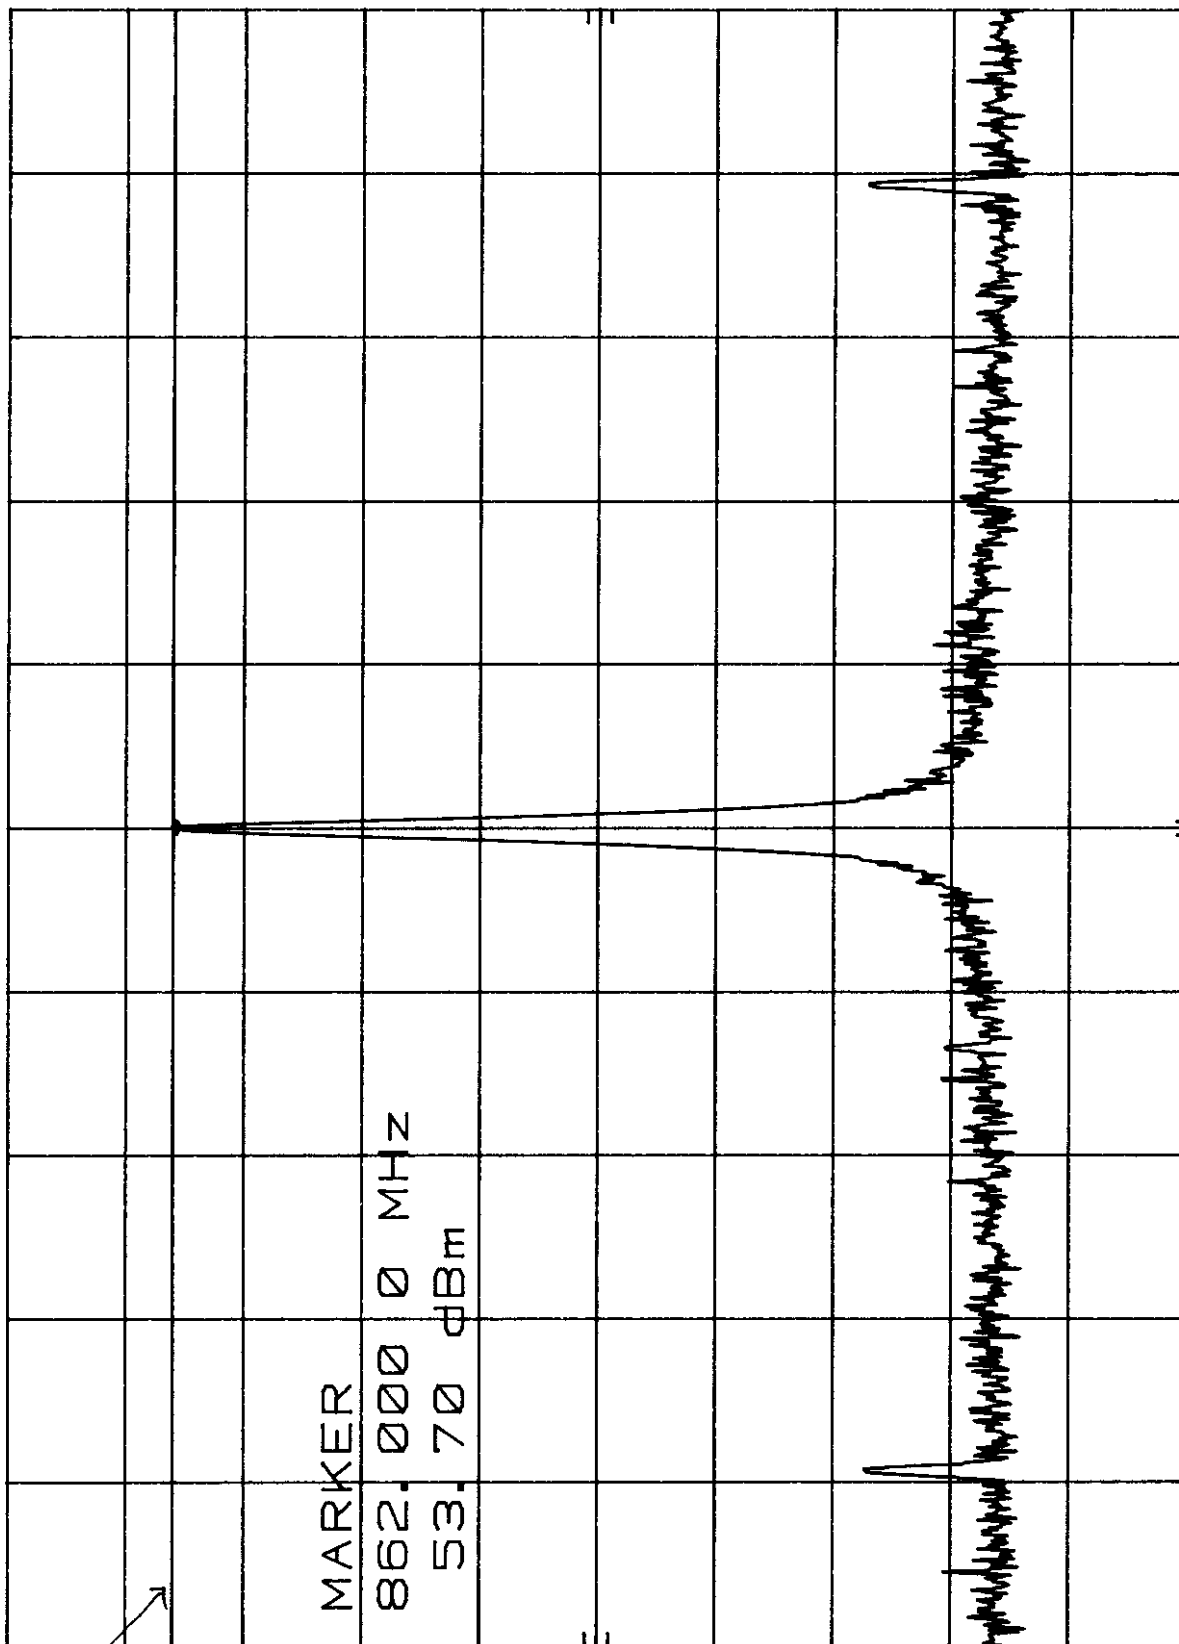

CENTER 862.000 MHz

RES BW 300 Hz

Hz

VBW 1 kHz

SPAN 100 kHz

SWP 3.00 sec

PA8-2EG-HMS OCCUPIED BANDWIDTH PART 22

250 WATTS

MRK 862.000 0 MHz
42.00 dBm

ATTEN 20 dB

REF 68.0 dBm

hp


10 dB/

POS PK

OFFSET
67.5
dB

DL
54.0
dBm

FCC UNIT

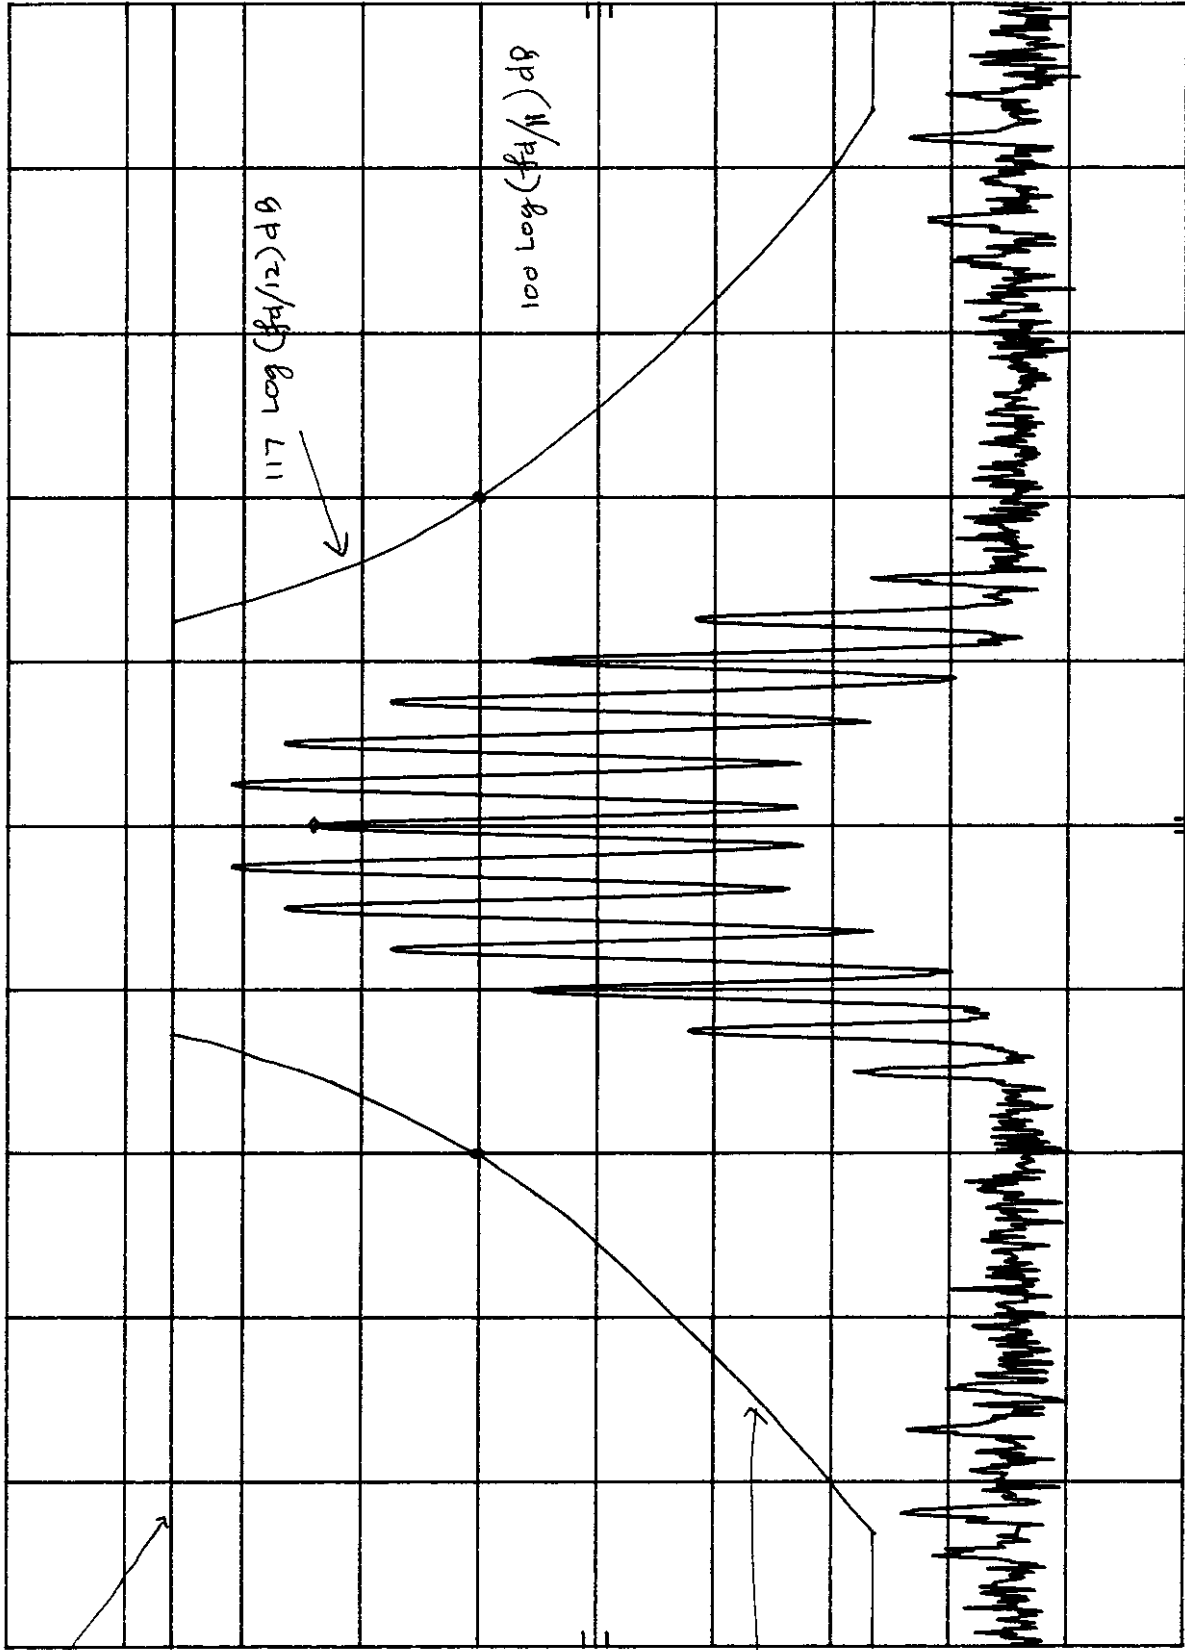

SPAN 100 KHz
SWP 3.00 sec

VBW 1 KHz

CENTER 862.000 MHz
RES BW 300 Hz

PA8-2EG-HMS
OCCUPIED BANDWIDTH PART 90

250 WATTS

MRK 862.000 0 MHz
42.00 dBm

REF 68.0 dBm ATTN 20 dB


h₁₀

10 dBX

POS PK

OFFSET
67.5
dB

DL
54.0
dBm

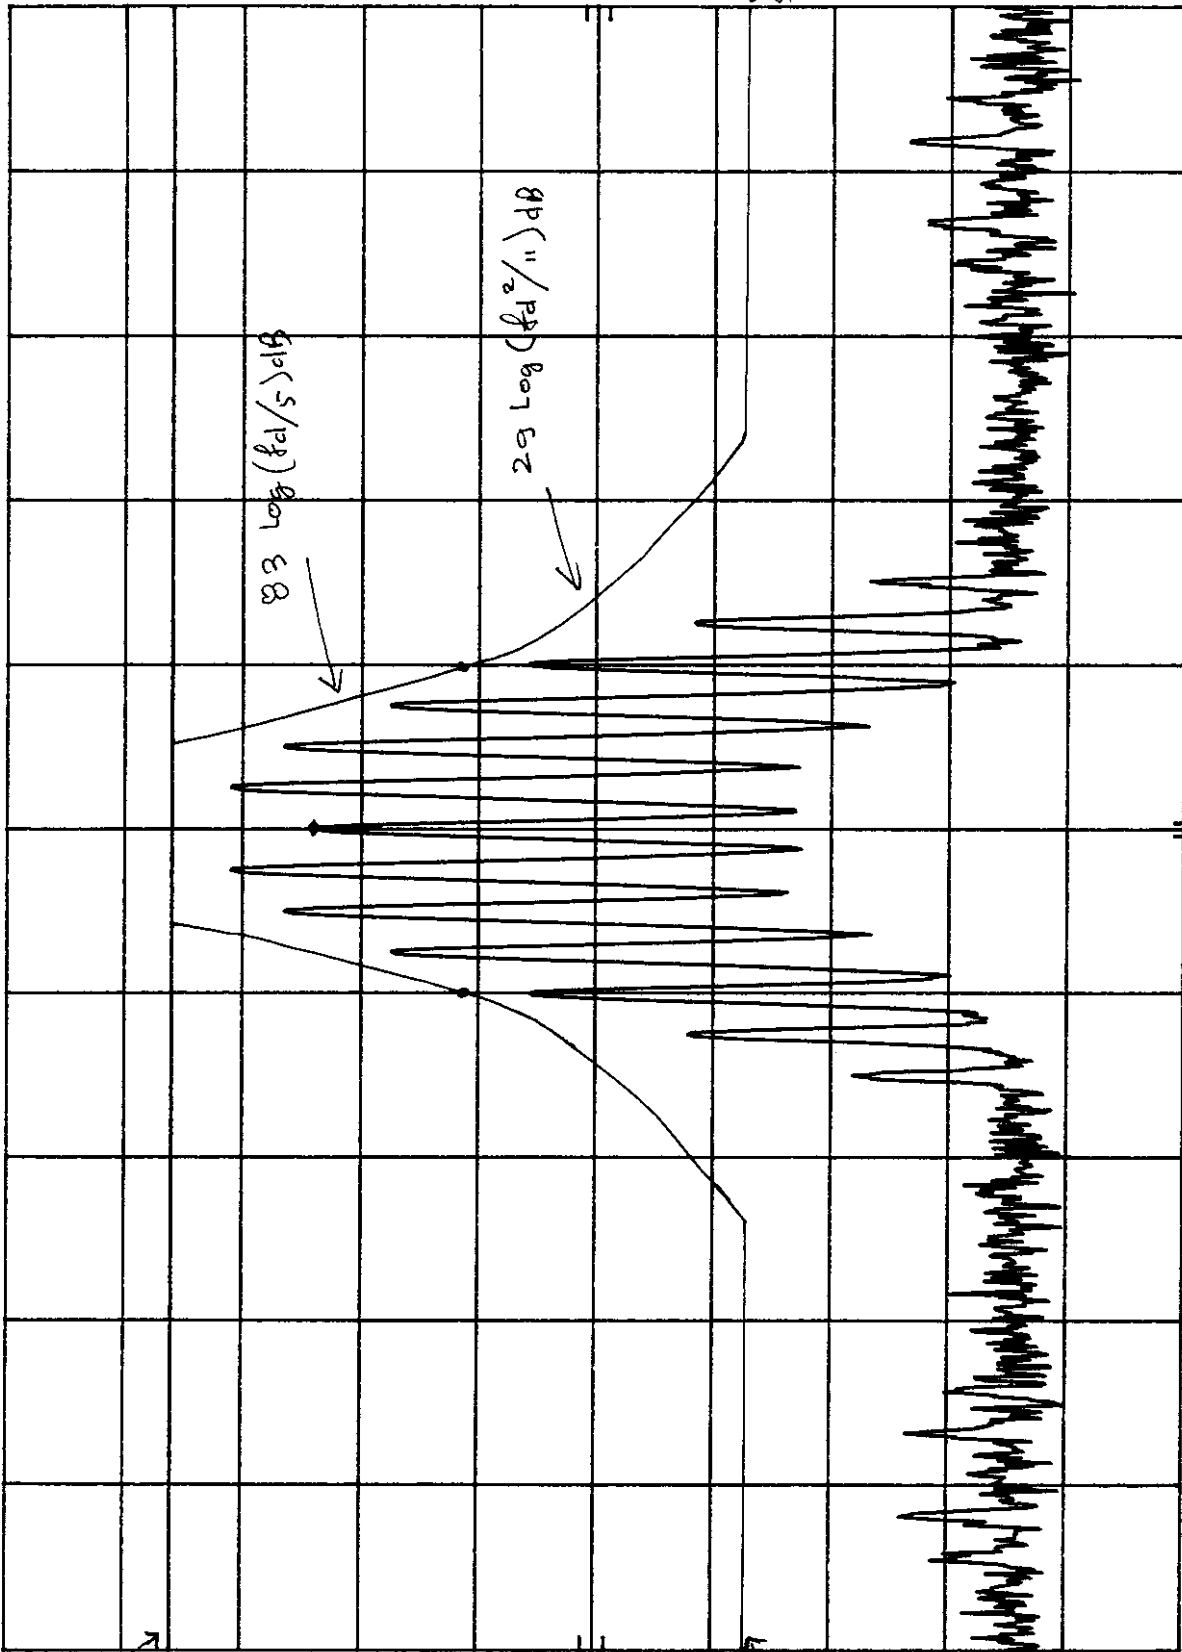

CENTER 862.000 MHz RES BW 300 Hz VBW 1 kHz SPAN 100 kHz SWP 3.00 sec

PA8-2EG-HMS
UNMODULATED CARRIER

MKR 866.000 0 MHz
53.70 dBm

ATTEN 20 dB

REF 68.0 dBm

h_p

10 dB/

POS PK

OFFSET

67.5

dB

MARKER


866.000 0 MHz

53.70 dBm

DL

54.0

dBm

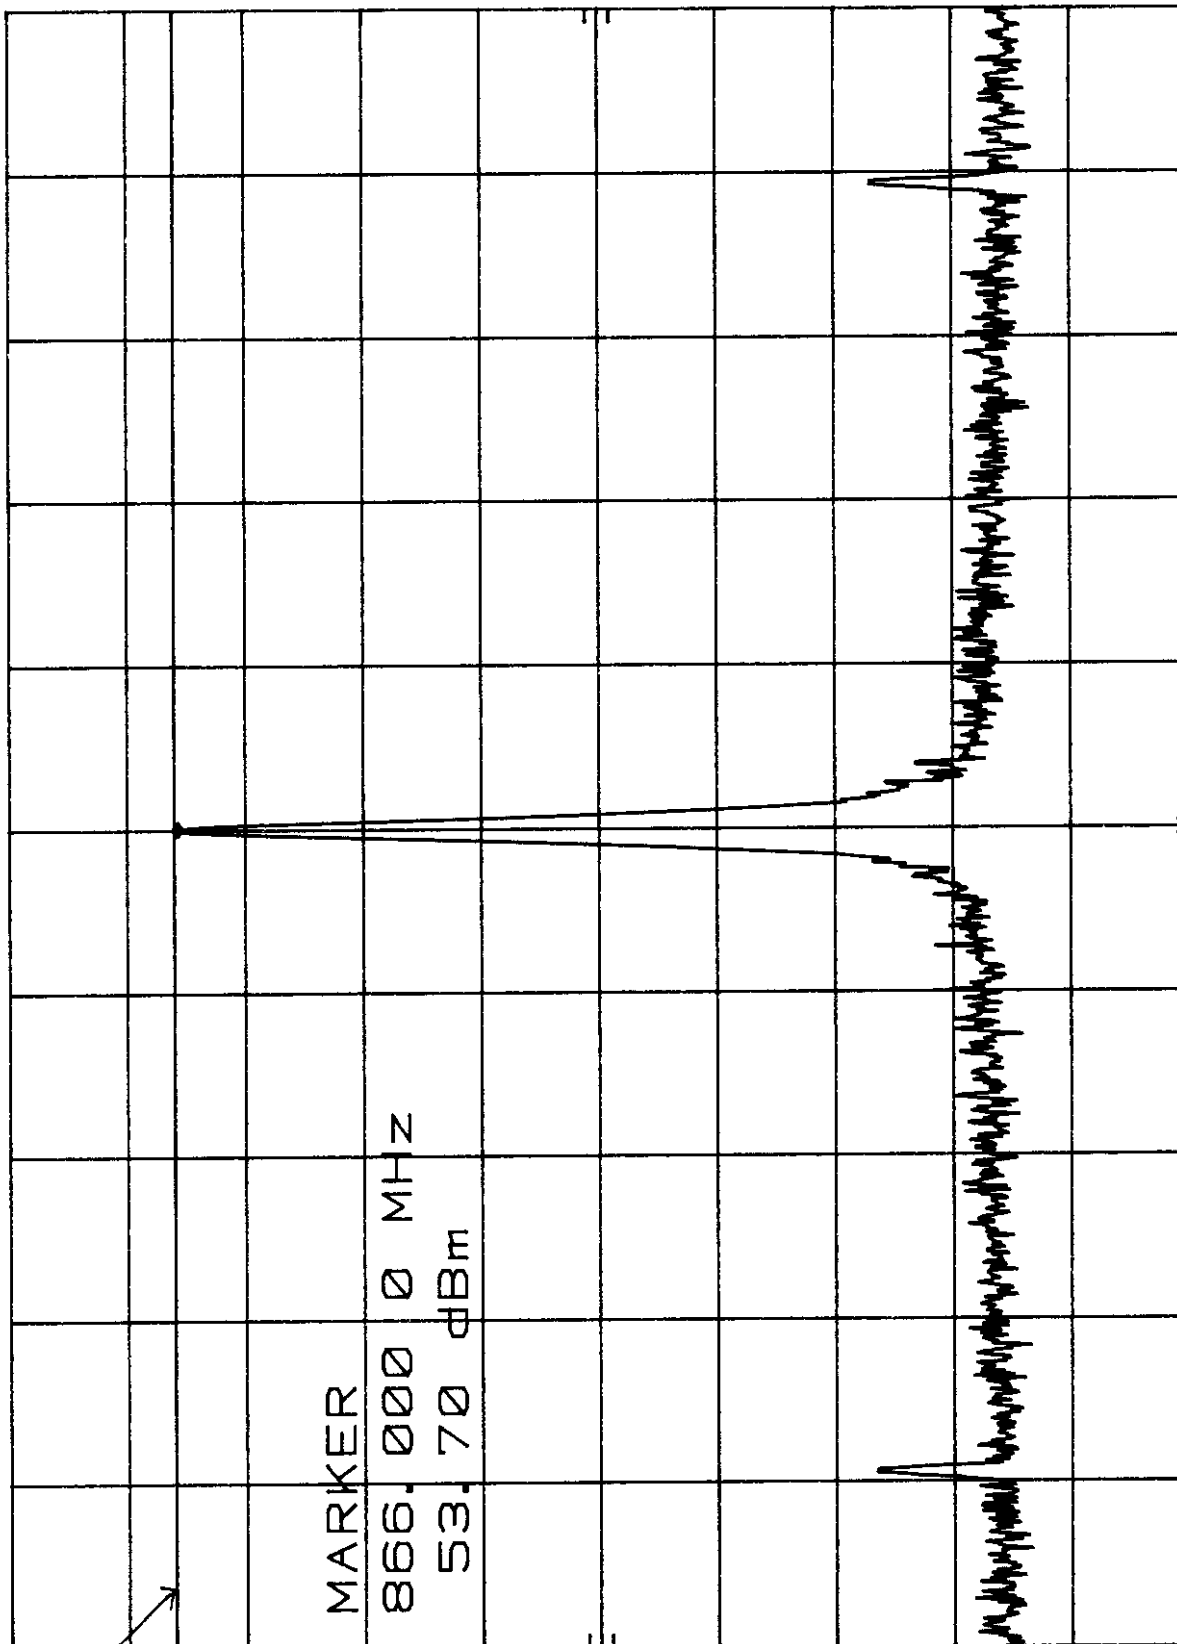

CENTER 866.000 MHz

RES BW 300 Hz

VBW 1 kHz

SWP 3.00 sec

SPAN 100 kHz

250 WATTS

PA8-2EG-HMS

OCCUPIED BANDWIDTH PART 22

MRK 866.000 0 MHz
41.90 dBm

ATTEN 20 dB

REF 68.0 dBm

HP

10 dB/

POS PK

OFFSET

67.5

dB


DL

54.0

dBm

19

FCC LIMIT

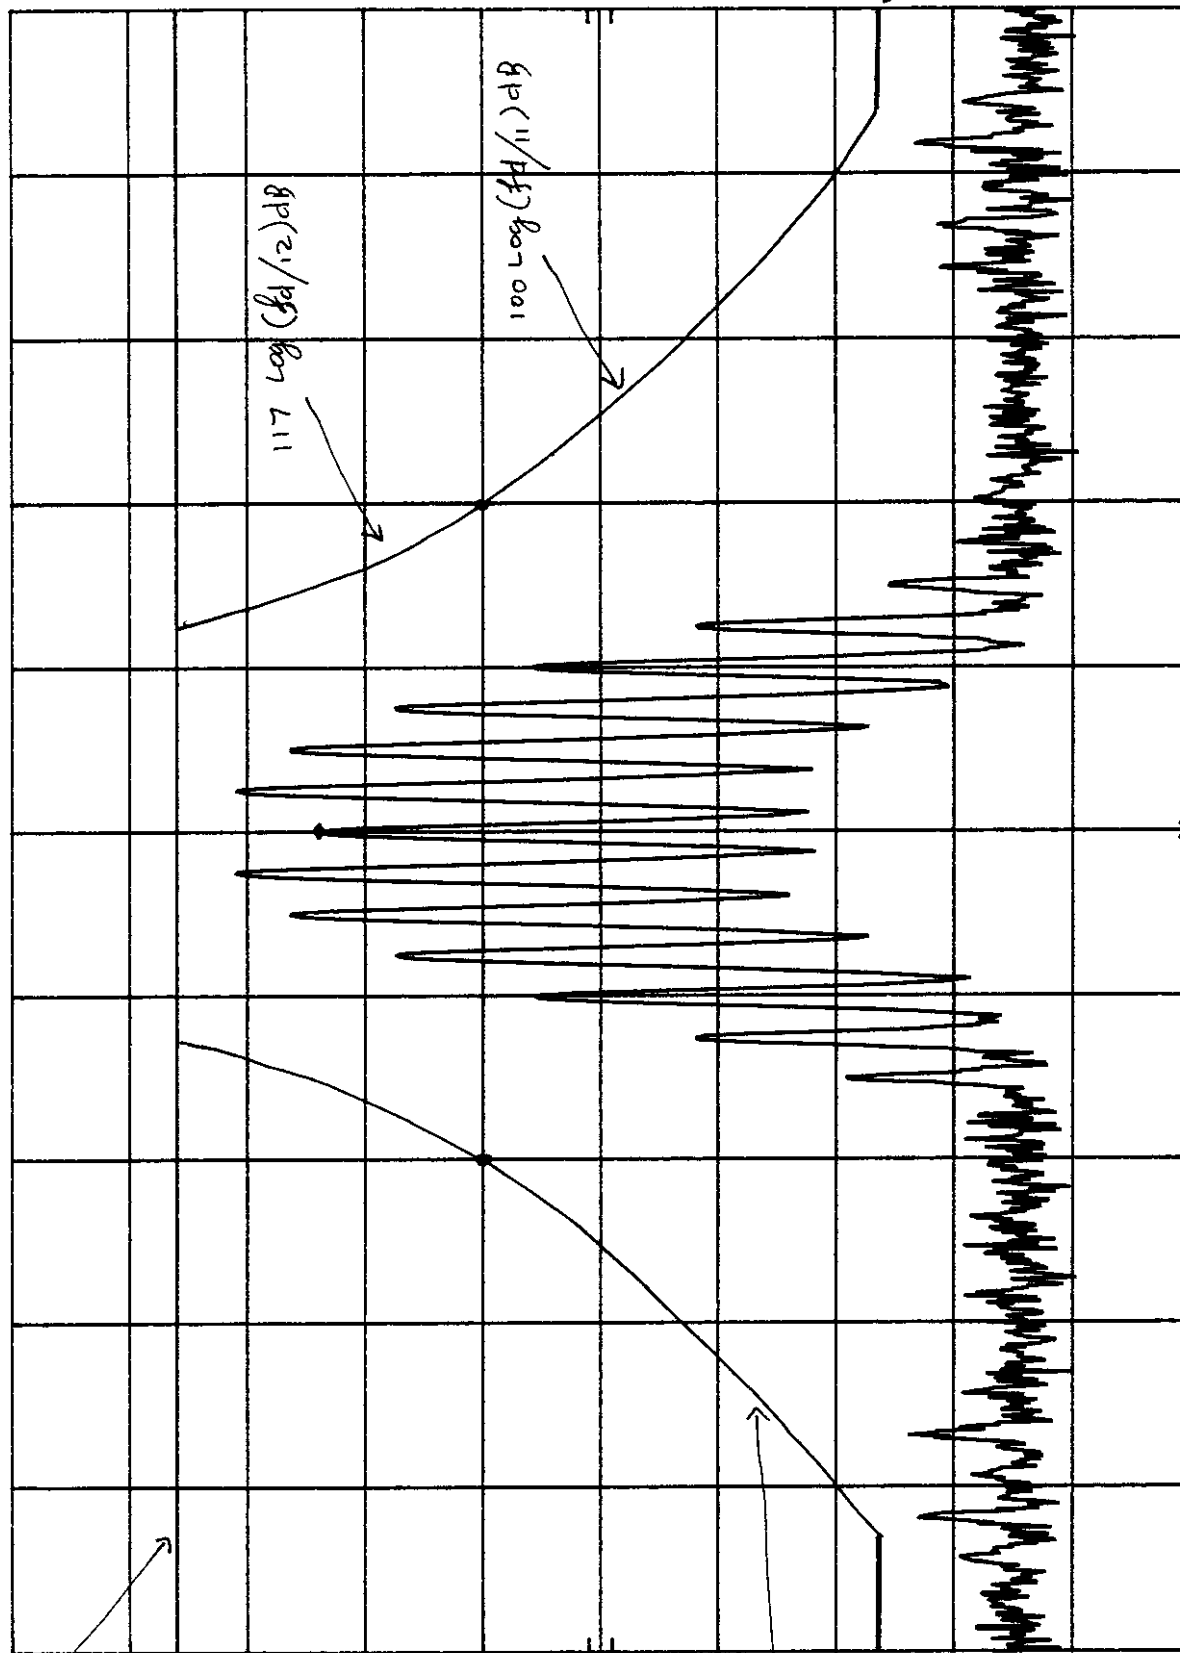

CENTER 866.000 MHz
RES BW 300 Hz
SPAN 100 kHz
SWP 3.00 sec

PA8-2EG-HMS OCCUPIED BANDWIDTH PART 90

250 WATTS

MKR 866.000 0 MHz
41.90 dBm

hp REF 68.0 dBm ATTEN 20 dB


10 dB/

POS PK

OFFSET
67.5
dB

DL
54.0
dBm

FCC LIMIT

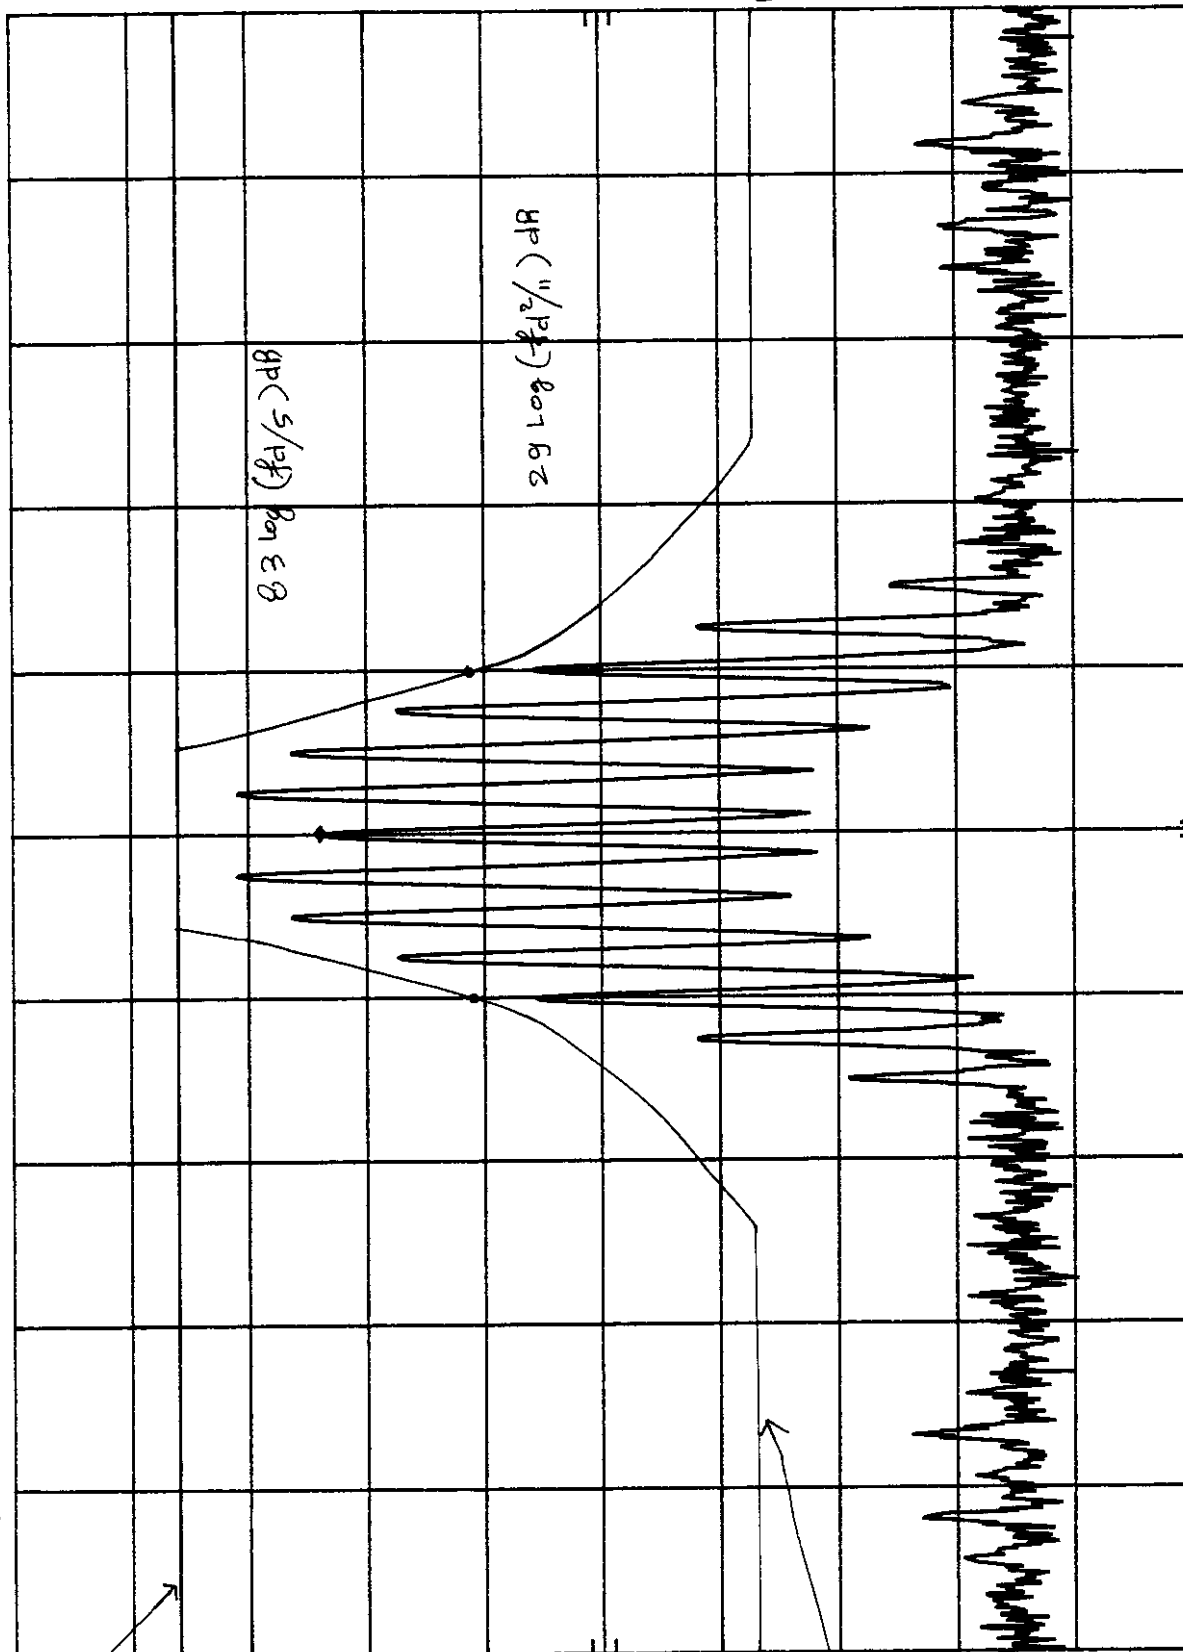

SPAN 100 KHz
SWP 3.00 sec

VBW 1 KHz

Hz

CENTER 866.000 MHz
RES BW 300


250 mW DRIVER OUTPUT : UNMODULATED CARRIER

70 REF 41.0 dBm ATTEN 10 dB

10 dBX
 POS PK
 OFFSET 41.0 dB

MARKER
 851.000 1 MHz
 24.00 dBm
 DL 24.0 dBm

MKR 851.000 1 MHz
 24.00 dBm

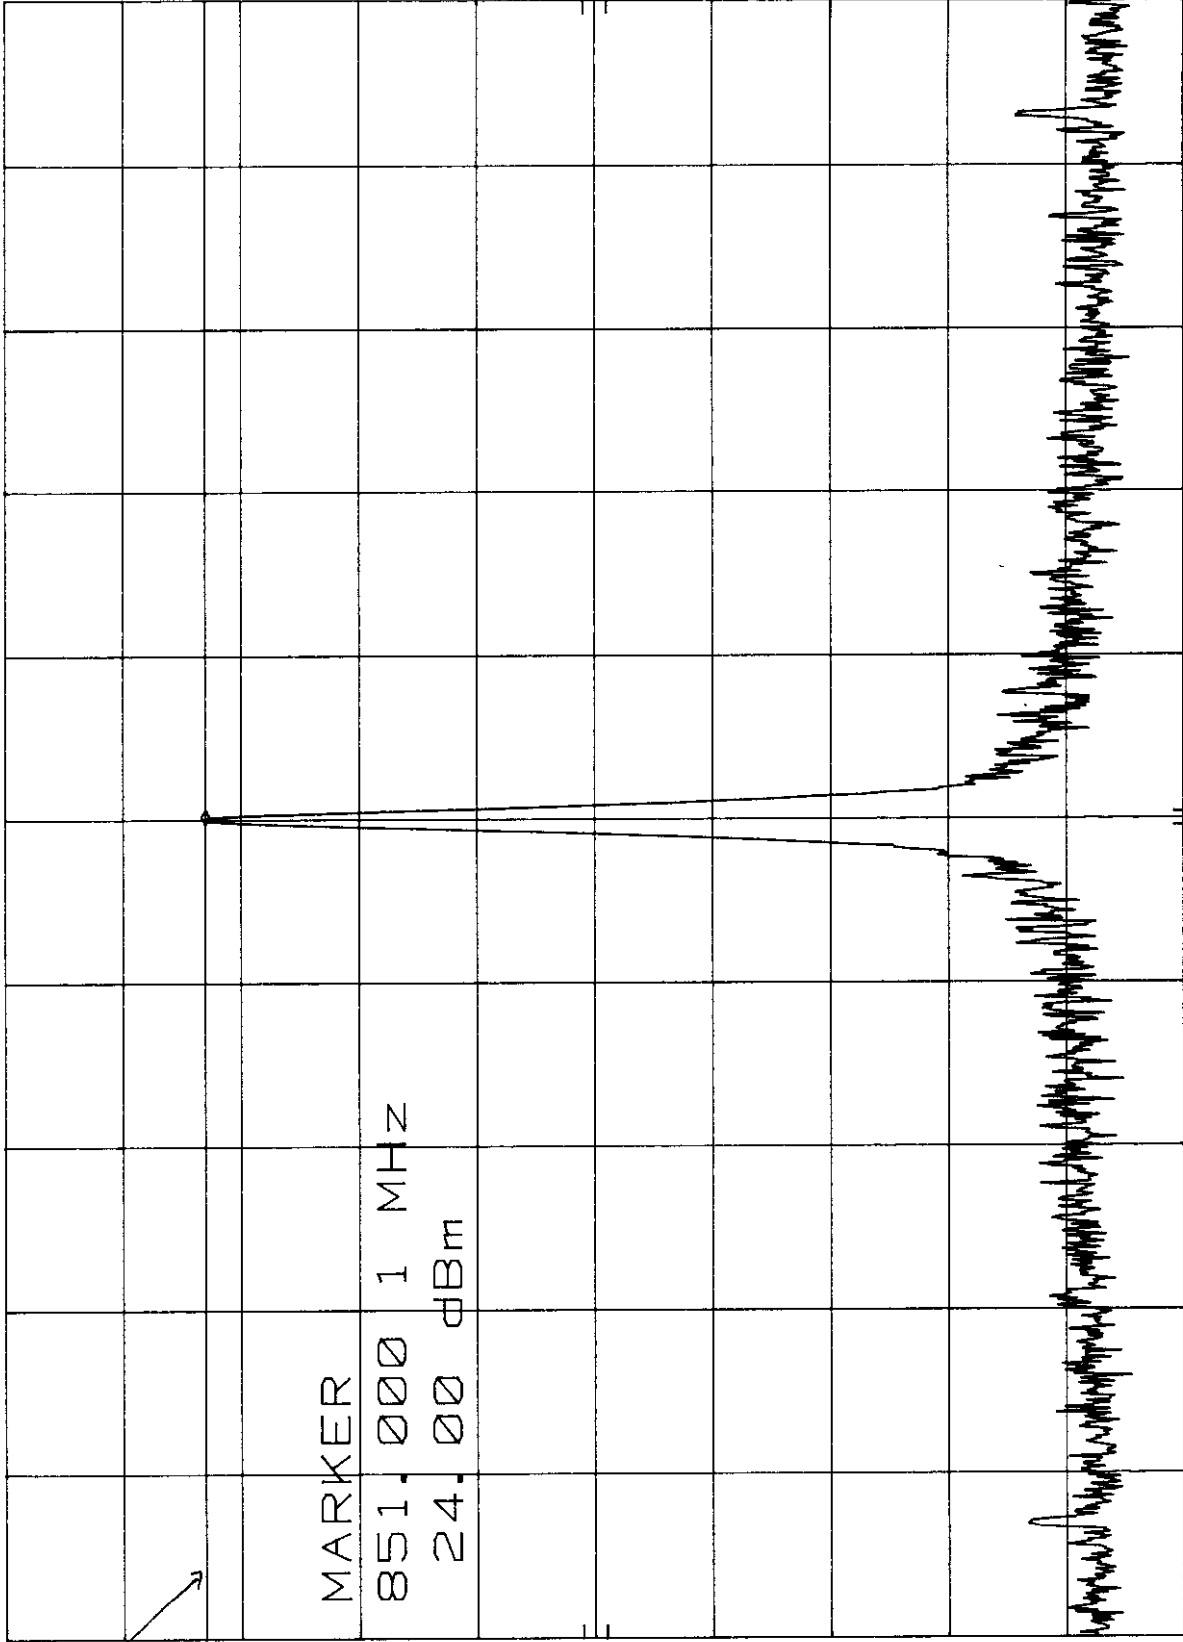

CENTER 851.000 MHz
 RES BW 300 Hz
 VBW 1 KHz
 SPAN 100 KHz
 SWP 3.00 sec

DRIVER OUTPUT : MODULATED CARRIER

250 mW

MKR 851.000 1 MHz
12.30 dBm

REF 41.0 dBm ATTN 10 dB

h_p 10 dBX


POS PK

OFFSET

41.0 dB


DL

24.0 dBm

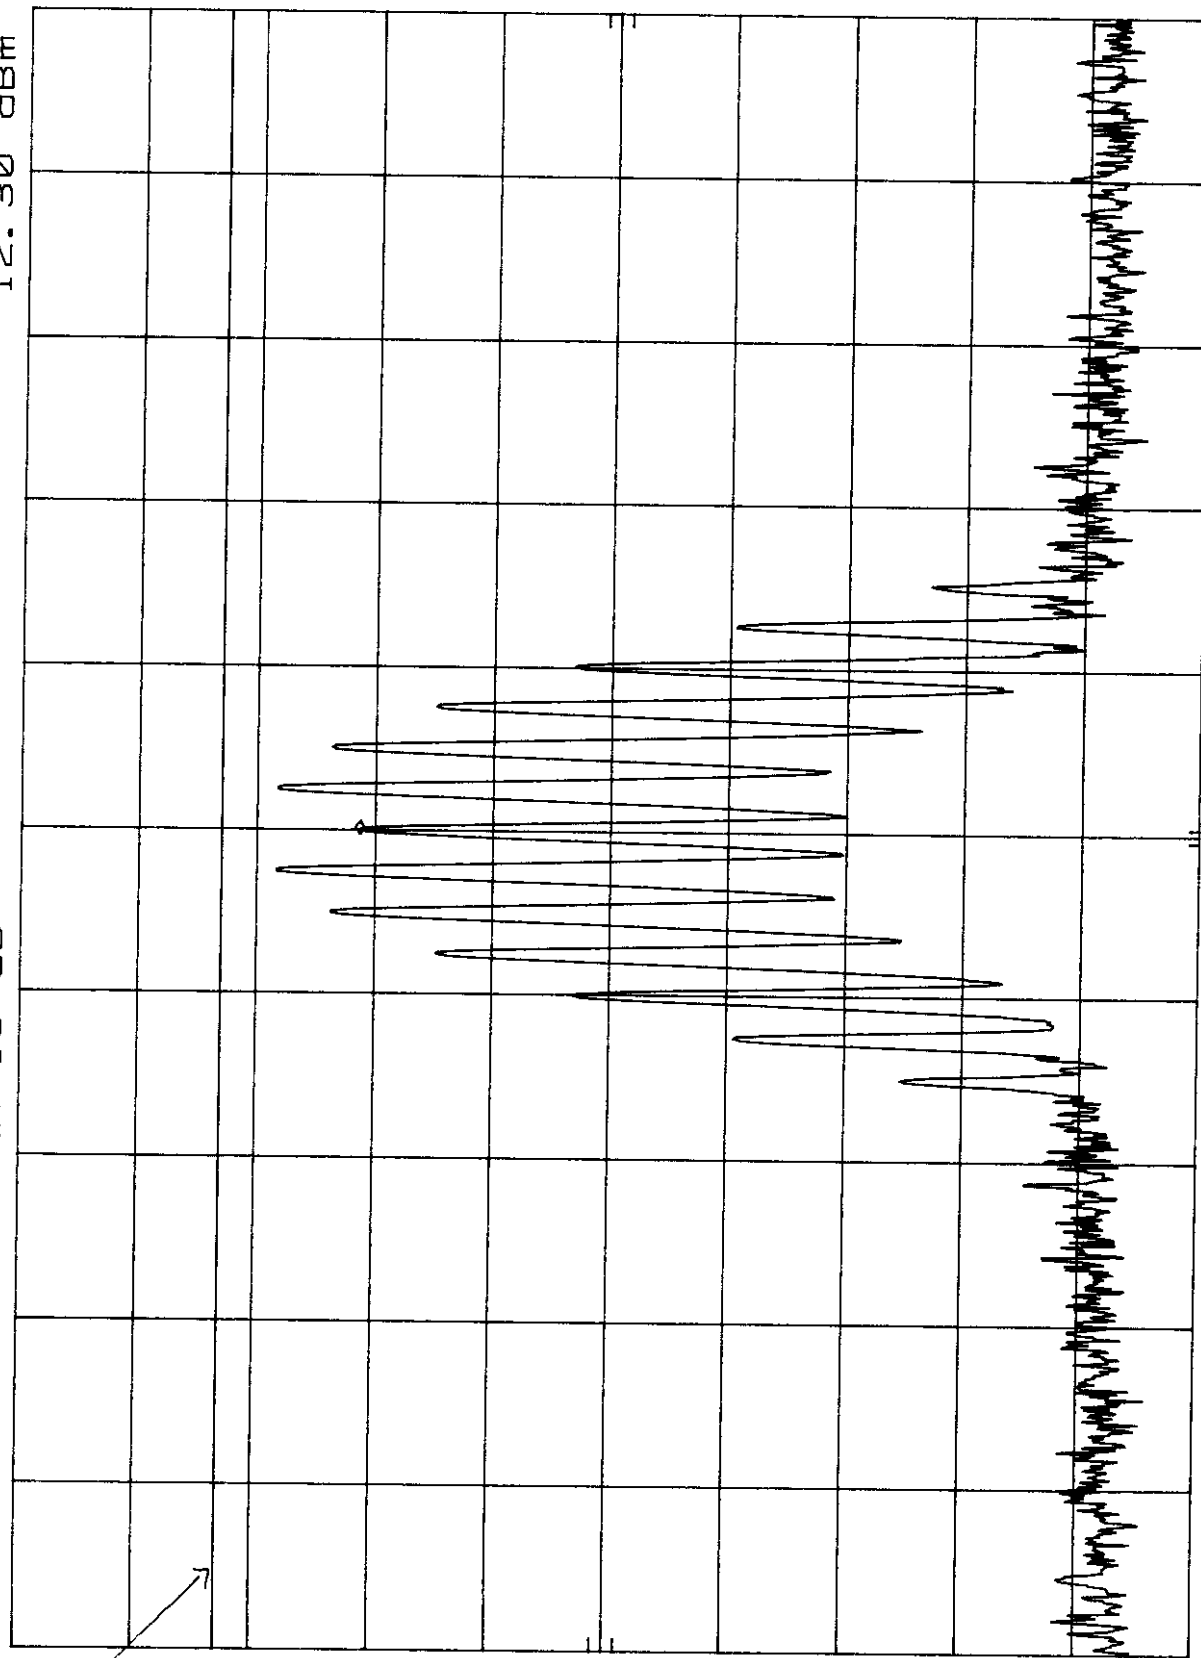

CENTER 851.000 MHz
RES BW 300 Hz
SPAN 100 kHz
SWP 3.00 sec

250mW DRIVER OUTPUT : UNMODULATED CARRIER

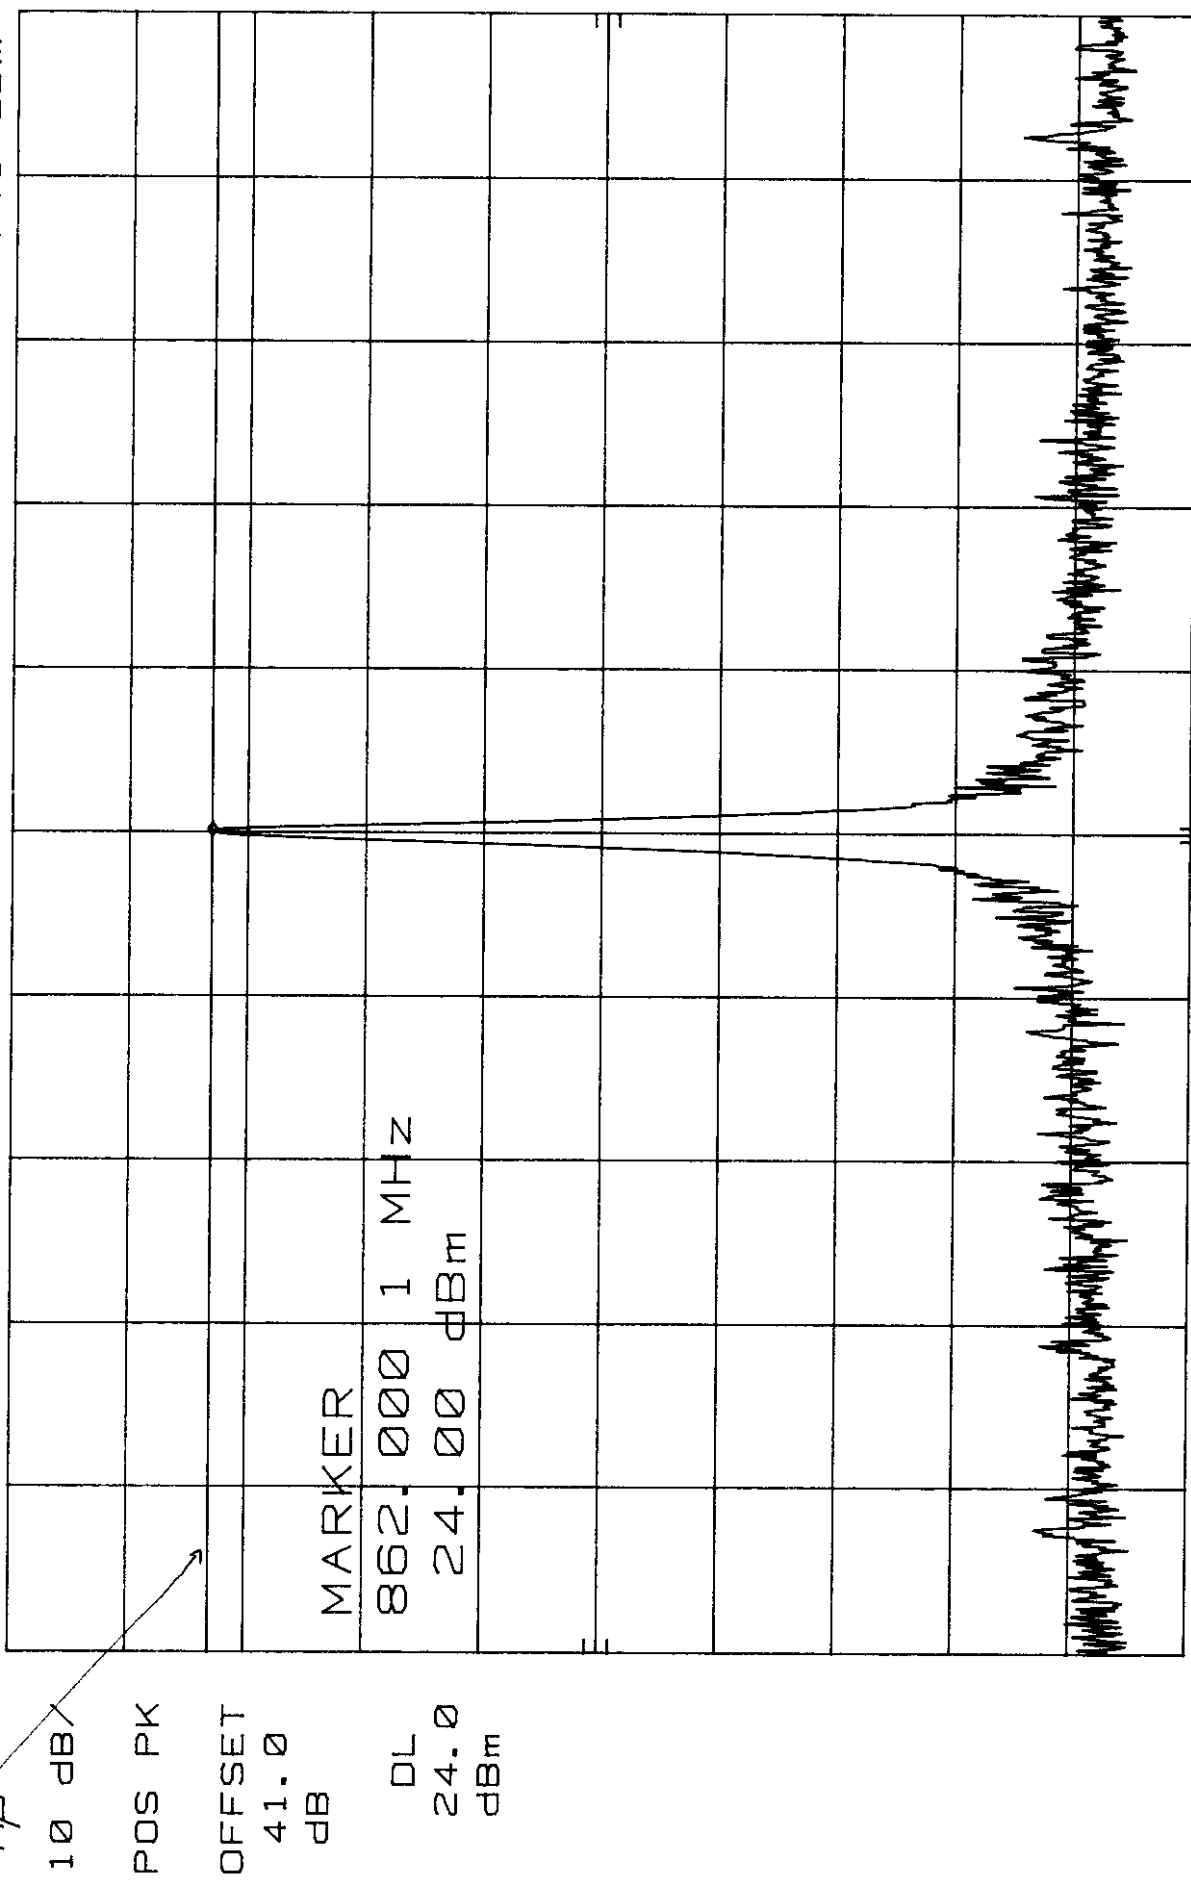

DRIVER OUTPUT : MODULATED CARRIER

250 mW

MKR 862.000 1 MHz
12.30 dBm

ATTEN 10 dB

REF 41.0 dBm

HP

10 dBX

POS PK

OFFSET


41.0

dB

DL

24.0

dBm

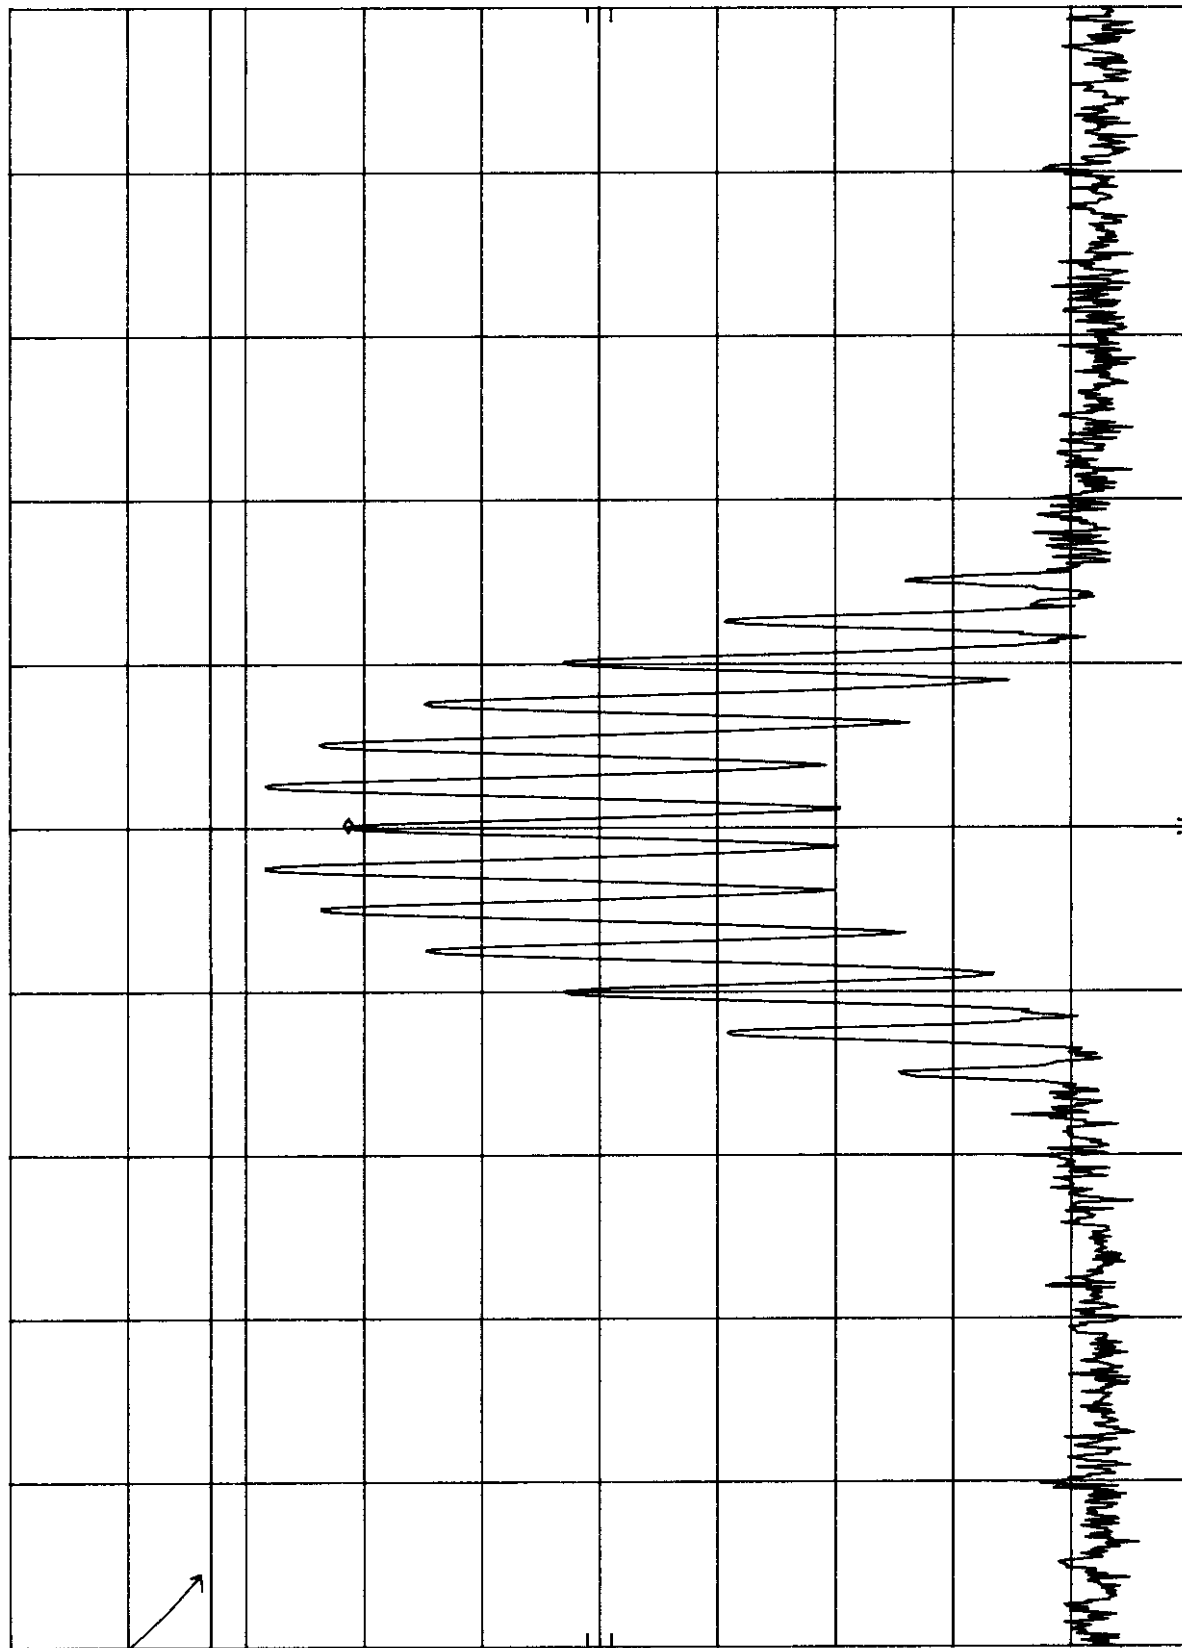

CENTER 862.000 MHz
RES BW 300 Hz
VBW 1 kHz
SPAN 100 kHz
SWP 3.00 sec

250 mW

DRIVER OUTPUT: UNMODULATED CARRIER

MKR 866.000 1 MHz
24.00 dBm

REF 41.0 dBm ATTN 10 dB

HP

10 dB

POS PK

OFFSET

41.0

dB

MARKER


866.000 1 MHz

24.00 dBm

DL

24.0

dBm

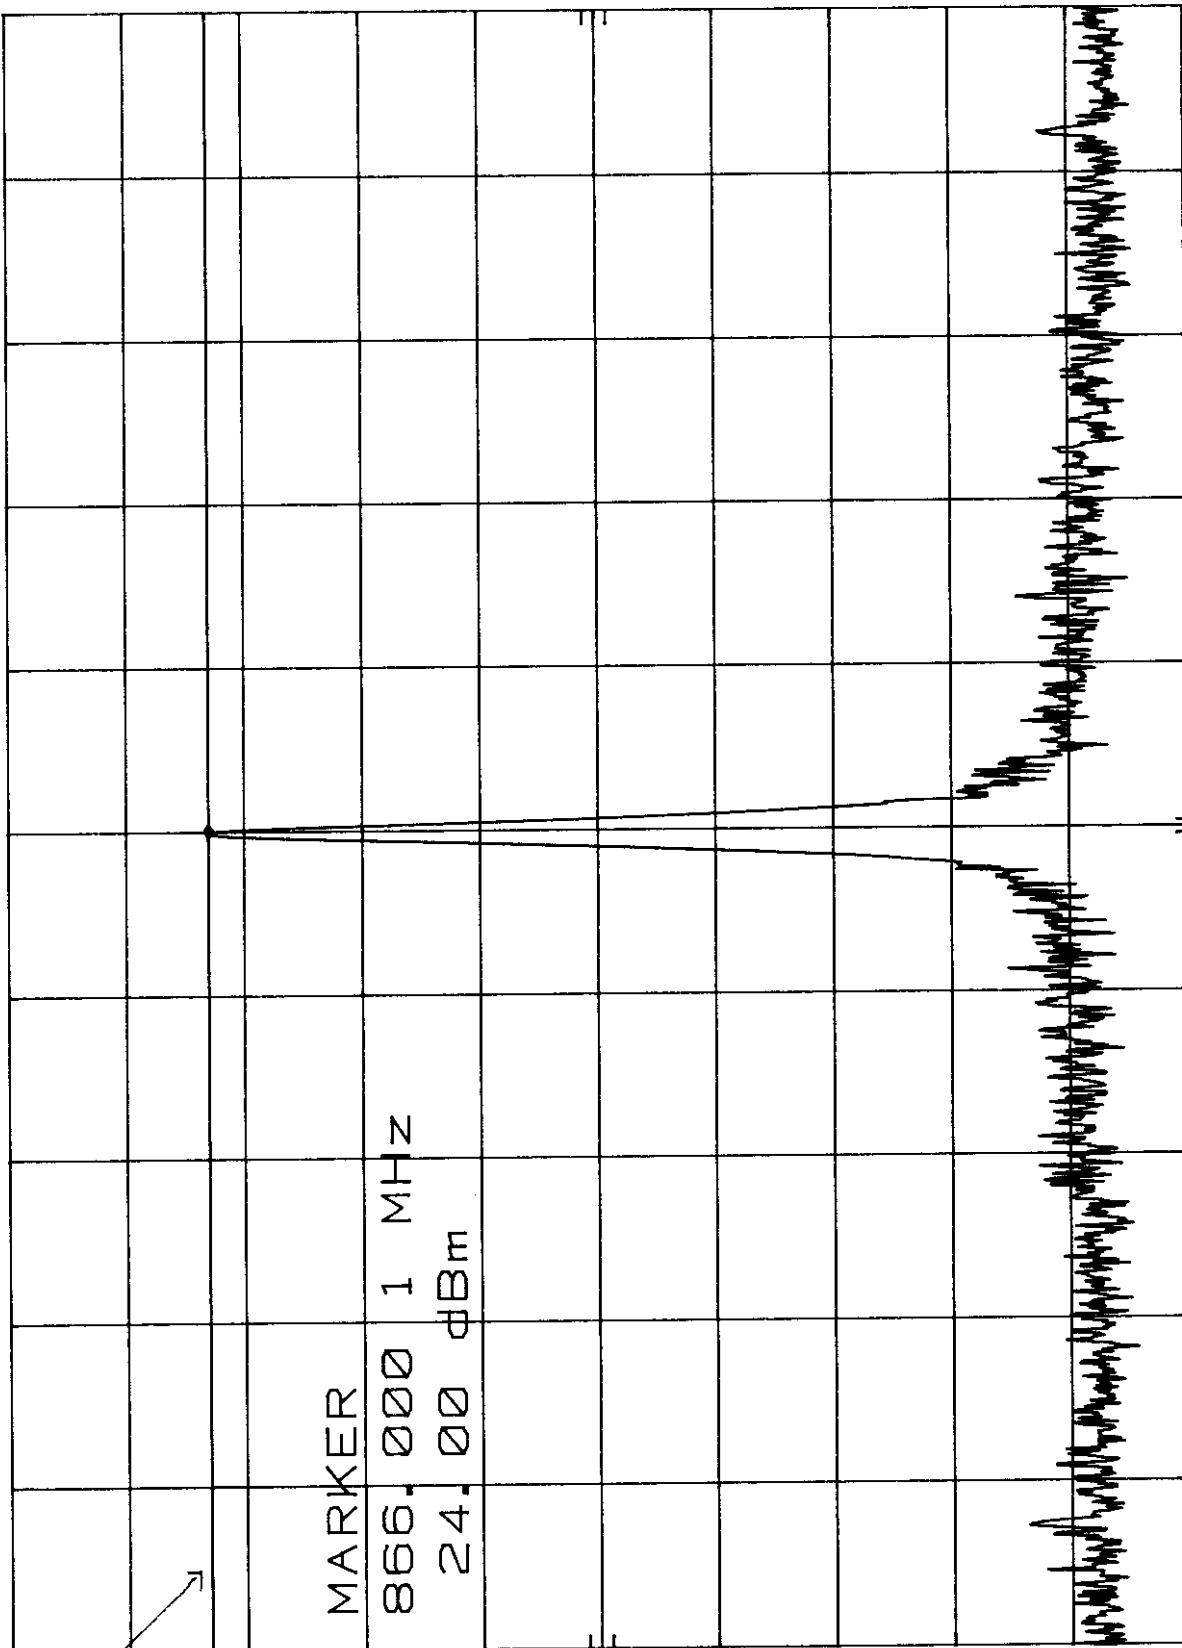

SPAN 100 KHz
SWP 3.00 sec

VBW 1 KHz

CENTER 866.000 MHz
RES BW 300 Hz

250 mW DRIVER OUTPUT : MODULATED CARRIER

MKR 866.000 1 MHz
12.40 dBm

ATTEN 10 dB

REF 41.0 dBm

hp

10 dB

POS PK

OFFSET


41.0

dB

DL

24.0

dBm

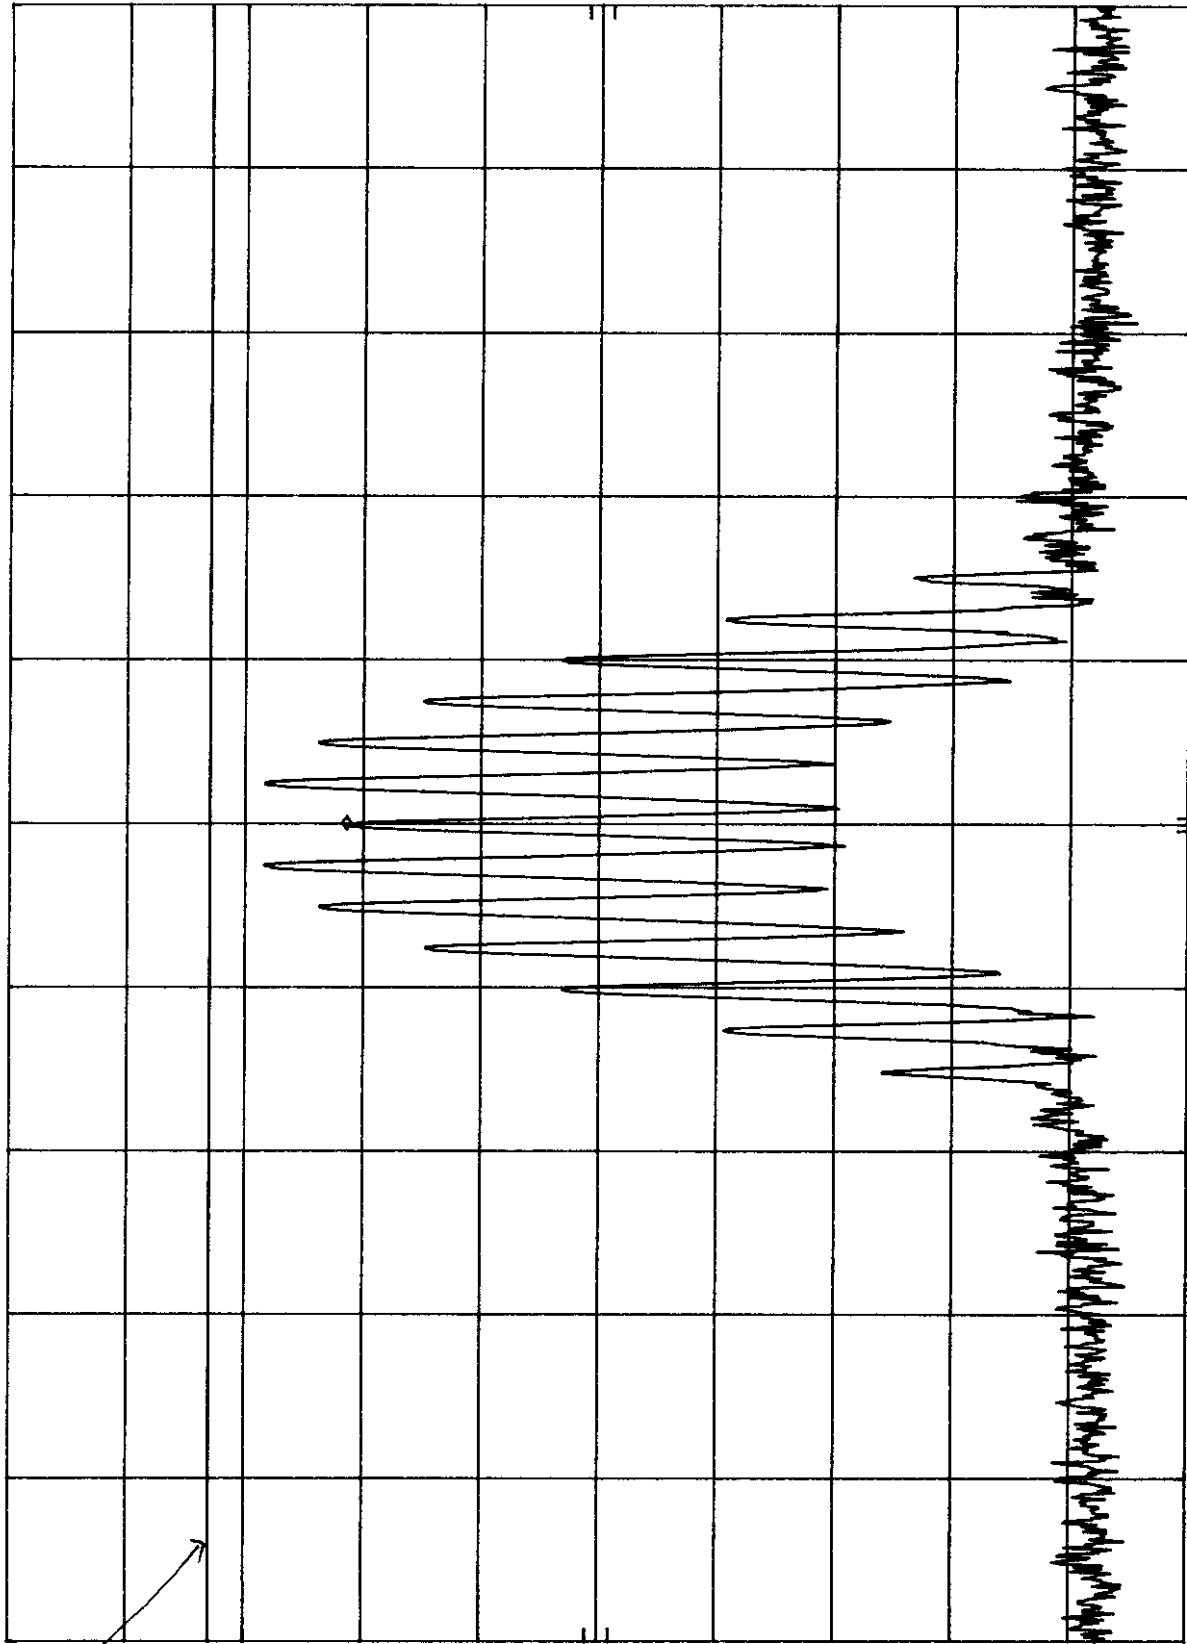

SPAN 100 kHz
SWP 3.00 sec

VBW 1 kHz

Hz

CENTER 866.000 MHz
RES BW 300

2.983(e)(4)

**Measurement of Antenna Conducted Spurious
Emissions Per 2.991**

Definition: Conducted Spurious Emissions are emissions at the antenna terminals on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communication desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

Conducted spurious emissions shall be attenuated below the maximum level of the carrier frequency in accordance with the following formula:

$$\text{Spurious attenuation in dB} = 43 + 10 \log_{10} P_o$$

Where P_o = output in watts

$$= 43 + 10 \log_{10} (250)$$

$$= 67.5 \text{ dB}$$

Test Method: Per EIA RS 152-B, Paragraph 4.

Connect the equipment as shown in FIGURE 4.

Adjust the audio oscillator so that the frequency deviation of the transmitter is 5 kHz at a modulation frequency of 2.5 kHz. Adjust the spectrum analyzer to display the modulated carrier.

Scan the frequency spectrum from the lowest radio frequency generated in the equipment through the 10th harmonic of the carrier frequency.

Test Results: See Plots Following Figure 4.

All spurious antenna conducted emissions are below the FCC specifications.

PA8-2EG-HMS ANTENNA CONDUCTED SPURIOUS

MKR Δ 850 MHz
-22.10 dB

ATTEN 10 dB

REF 46.0 dBm

HP

10 dB/

POS PK

OFFSET

46.0

dB

DL

-13.0

dBm

MARKER Δ

850 MHz

-22.10 dB

67dBc

FCC LIMIT

→

WITH

NOTCH

FILTER

AT SPECTRUM

ANALYZER.

START 800 MHz

RES BW 30 kHz

VBW 100 kHz

STOP 2.50 GHz

SWP 5.10 sec

PA8-2EG-HMS

ANTENNA CONDUCTED SPURIOUS

MKR Δ 850 MHz
5.30 dB

HP

10 dB/

POS PK

OFFSET

46.0

dB

MARKER Δ

850 MHz

5.30 dB


DL

-13.0

dBm

67 dBc

FCC LIMIT

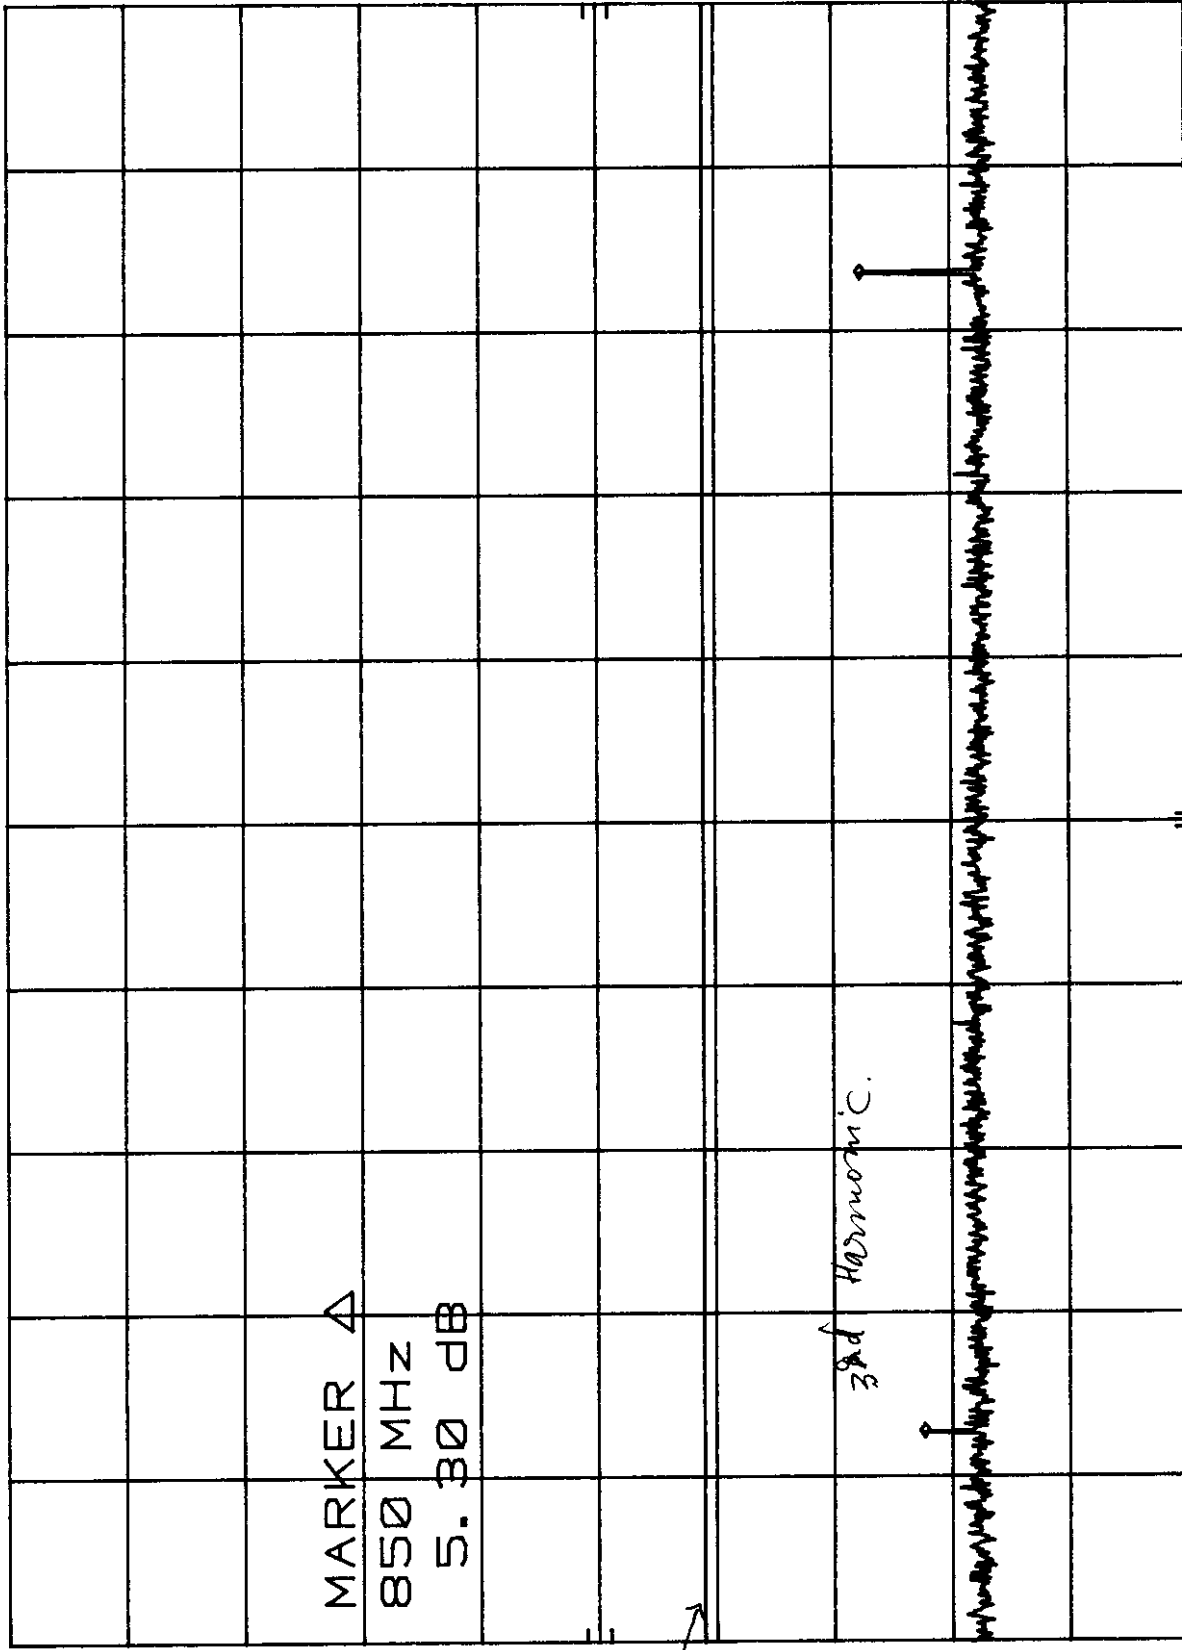

START 2.40 GHz

RES BW 30 kHz

VBW 100 kHz

STOP 3.60 GHz

SWP 3.60 sec

PA8-2EG-HMS ANTENNA CONDUCTED SPURIOUS

MKR 4.248 GHz
-30.80 dBm

ATTEN 10 dB

REF 46.0 dBm

HP

10 dB/

POS PK

OFFSET

46.0

dB

MARKER

4.248 GHz

-30.80 dBm

DL

-13.0

dBm

67 dBc

FCC LIMIT

HARMONIC. (of 851 kHz)

5th


START 3.50 GHz

RES BW 30 KHz

VBW 100 KHz

STOP 10.00 GHz

SWP 19.5 sec

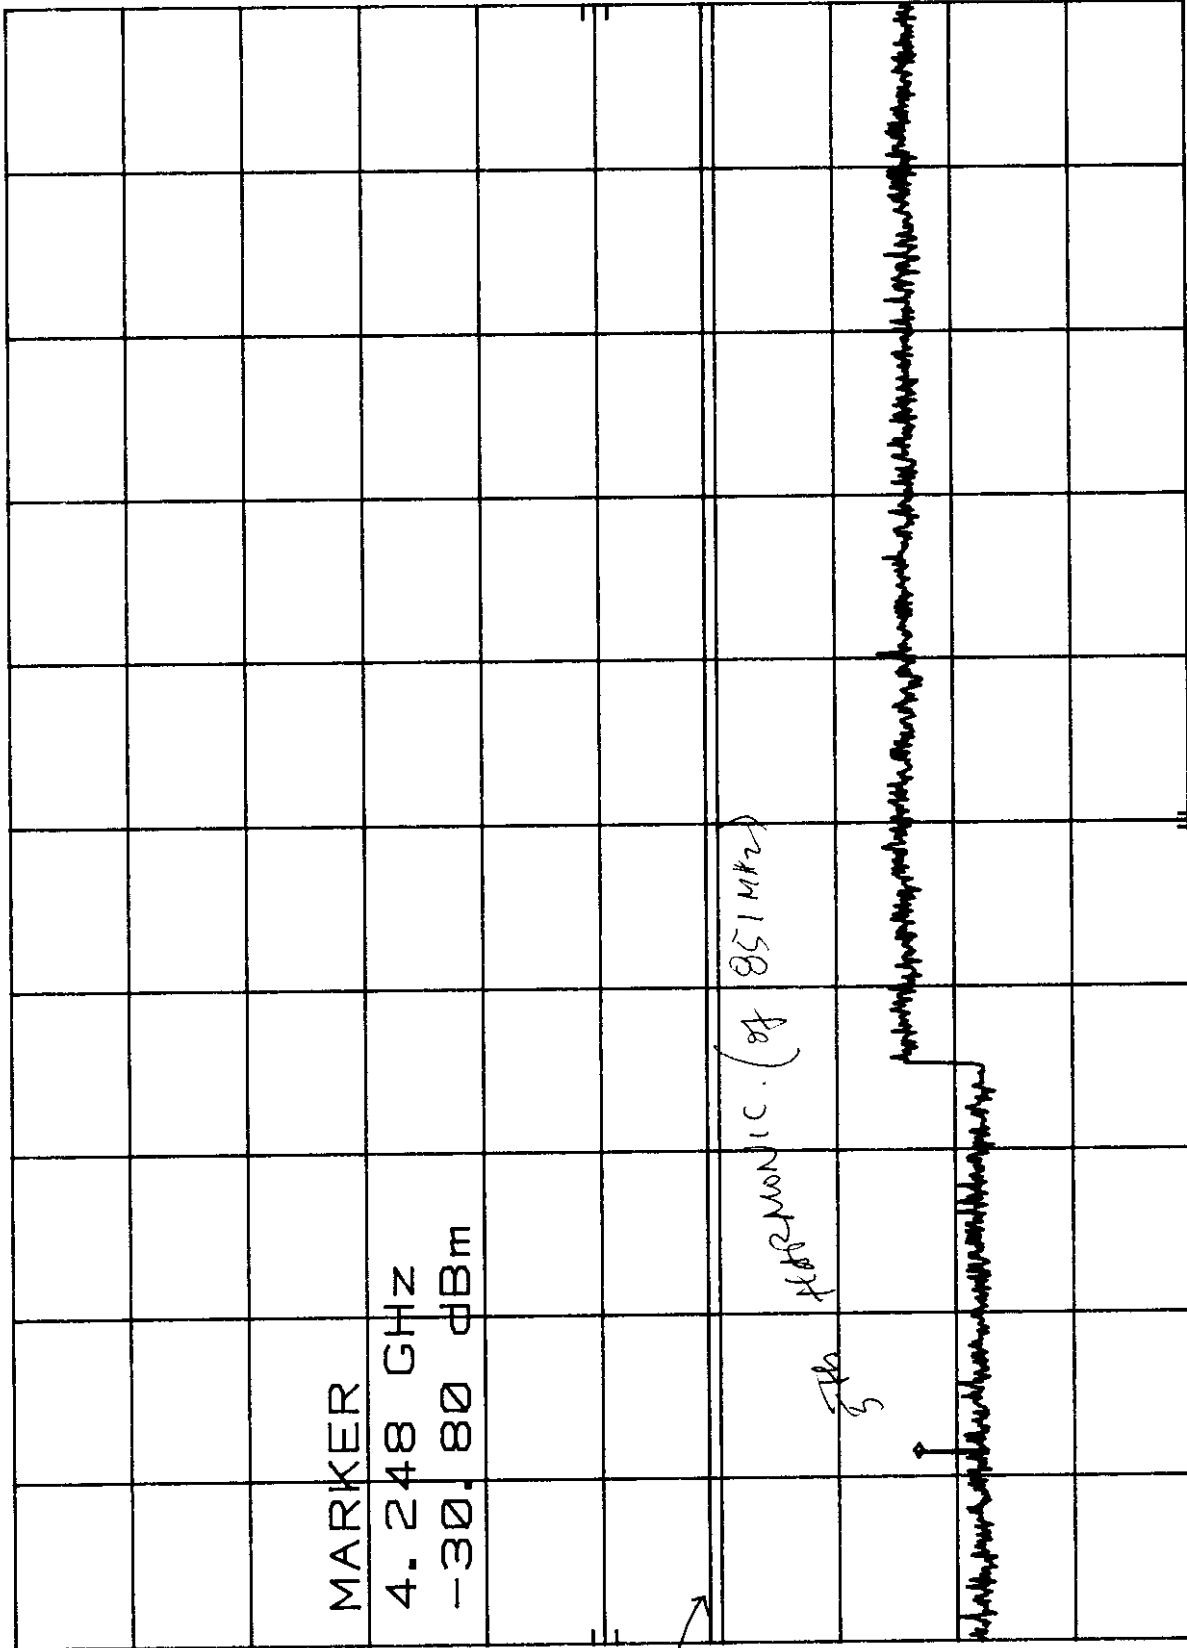

PA3-2EG-HMS ANTENNA CONDUCTED SPURIOUS

MKR Δ 862 MHz
-8.10 dB

ATTEN 10 dB

REF 46.0 dBm

HP

10 dB/

POS PK

OFFSET

46.0

dB

DL

-13.0

dBm

MARKER Δ


862 MHz

-8.10 dB

67 dBc

FCC limit

WITH NOTCH FILTER AT SPECTRUM ANALYZER

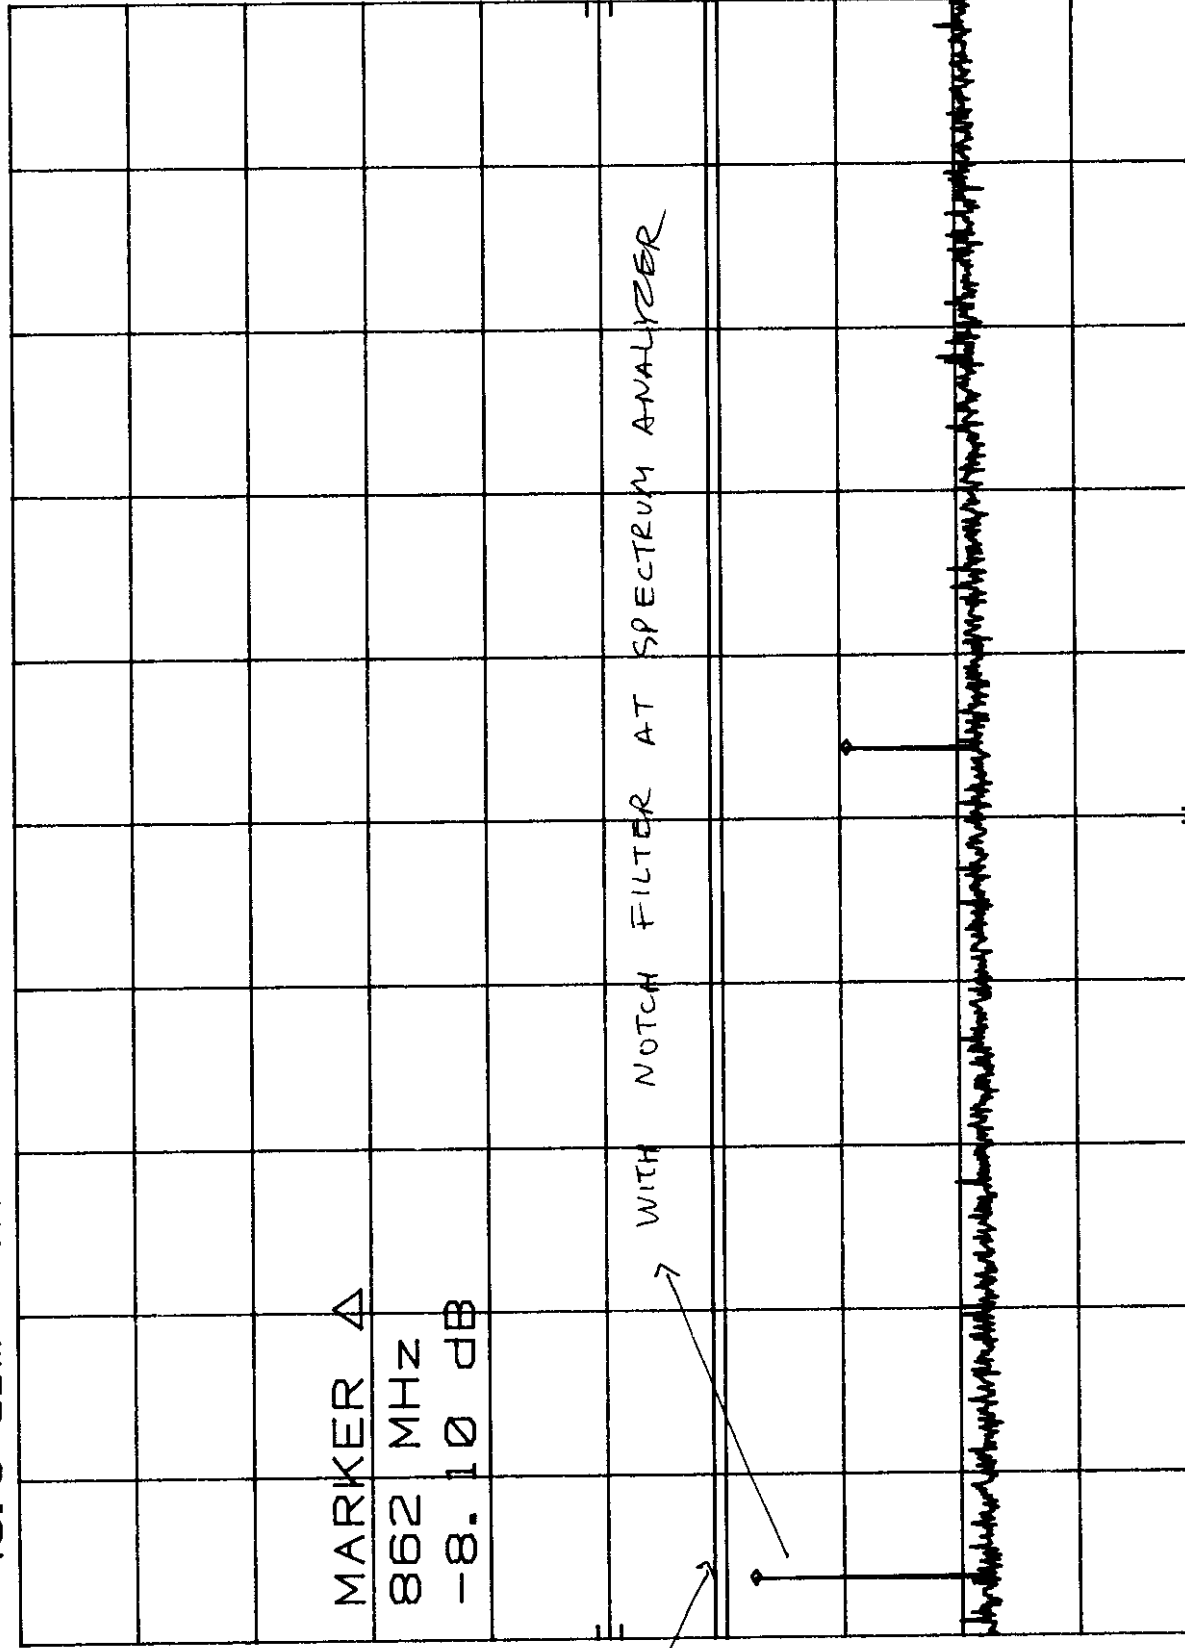

START 800 MHz

RES BW 30 KHz

VBW 100 KHz

STOP 2.50 GHz

SWP 5.10 sec

PA8-2EG-HMS ANTENNA CONDUCTED SPURIOUS

MKR Δ 862 MHz
3.30 dB

ATTEN 10 dB

h_p REF 46.0 dBm

10 dB/

POS PK

OFFSET

46.0

dB

MARKER Δ

862 MHz

3.30 dB

DL

-13.0

dBm

67dBc

FCC LIMIT

2nd harmonic


START 2.40 GHz

RES BW 30 KHz

VBW 100 KHz

STOP 3.60 GHz

SWP 3.60 sec

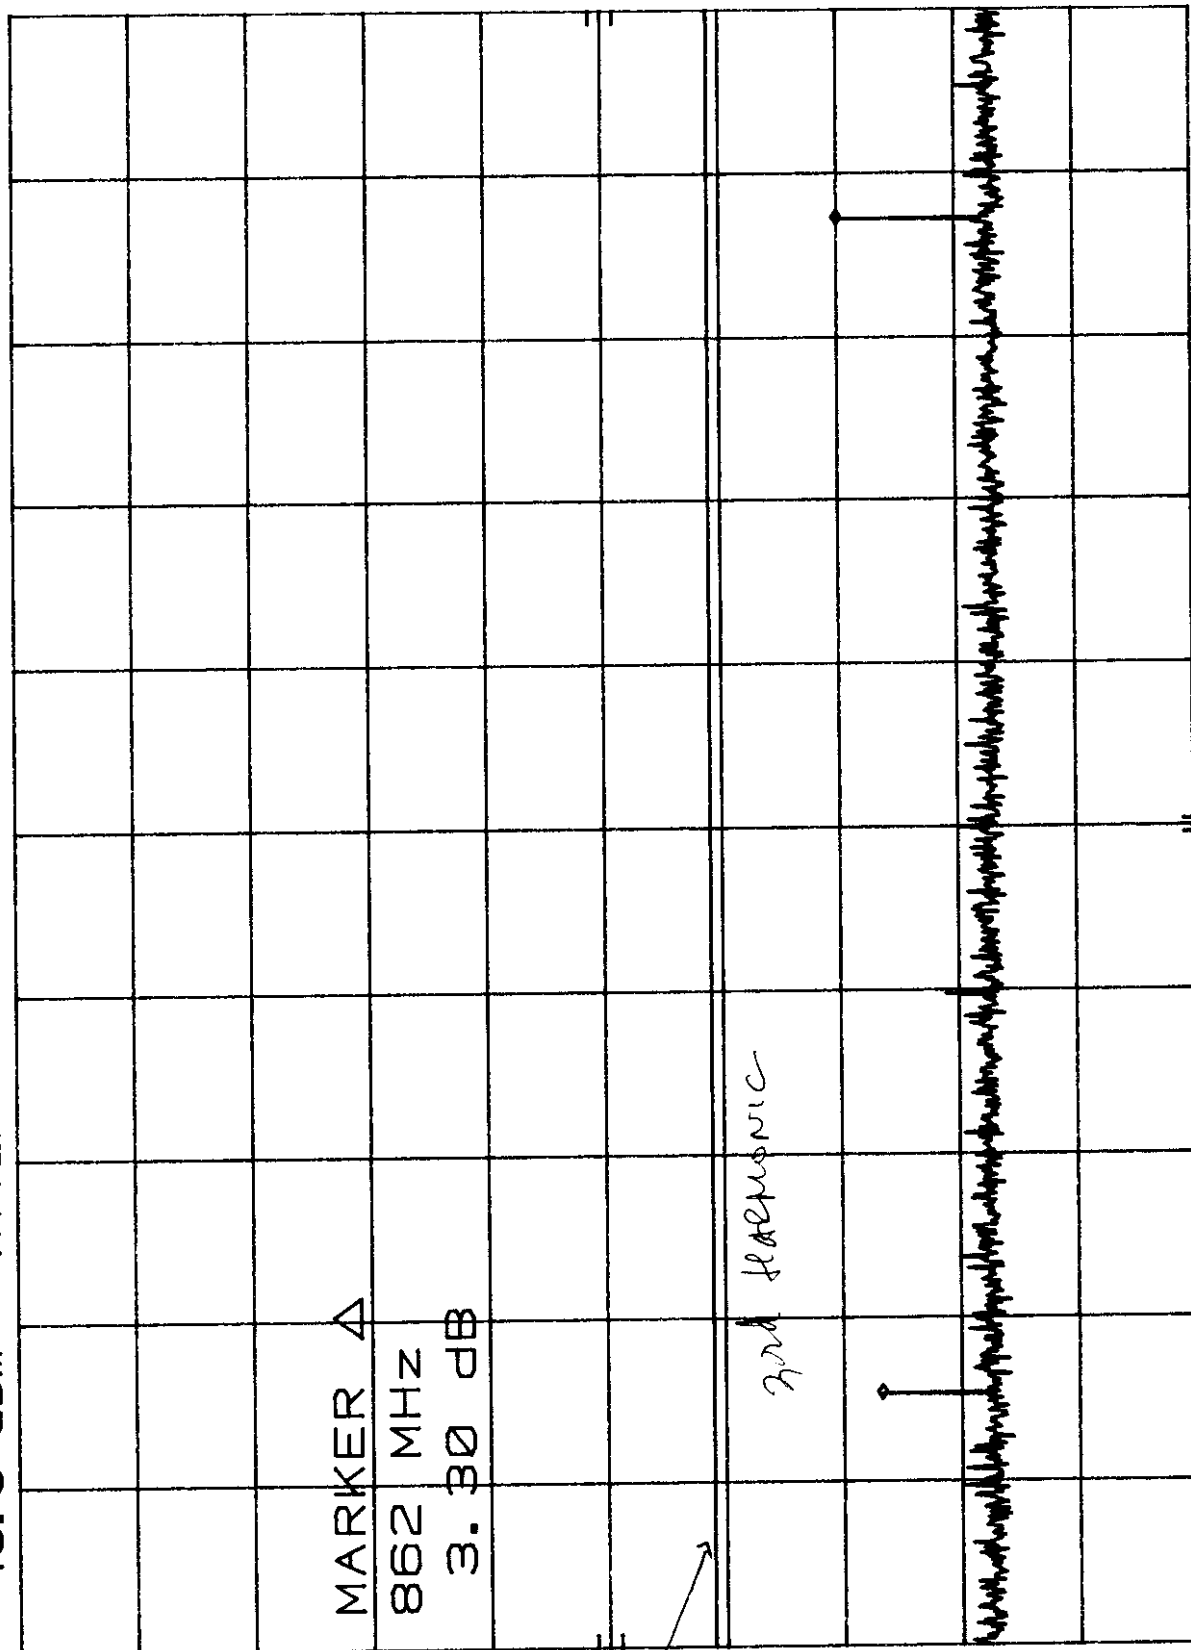

PA8-2EG-HMS ANTENNA CONDUCTED SPURIOUS

HP REF 46.0 dBm ATTEN 10 dB

10 dB/

POS PK

OFFSET

46.0

dB


DL

-13.0

dBm

67dBc

FCC LIMIT

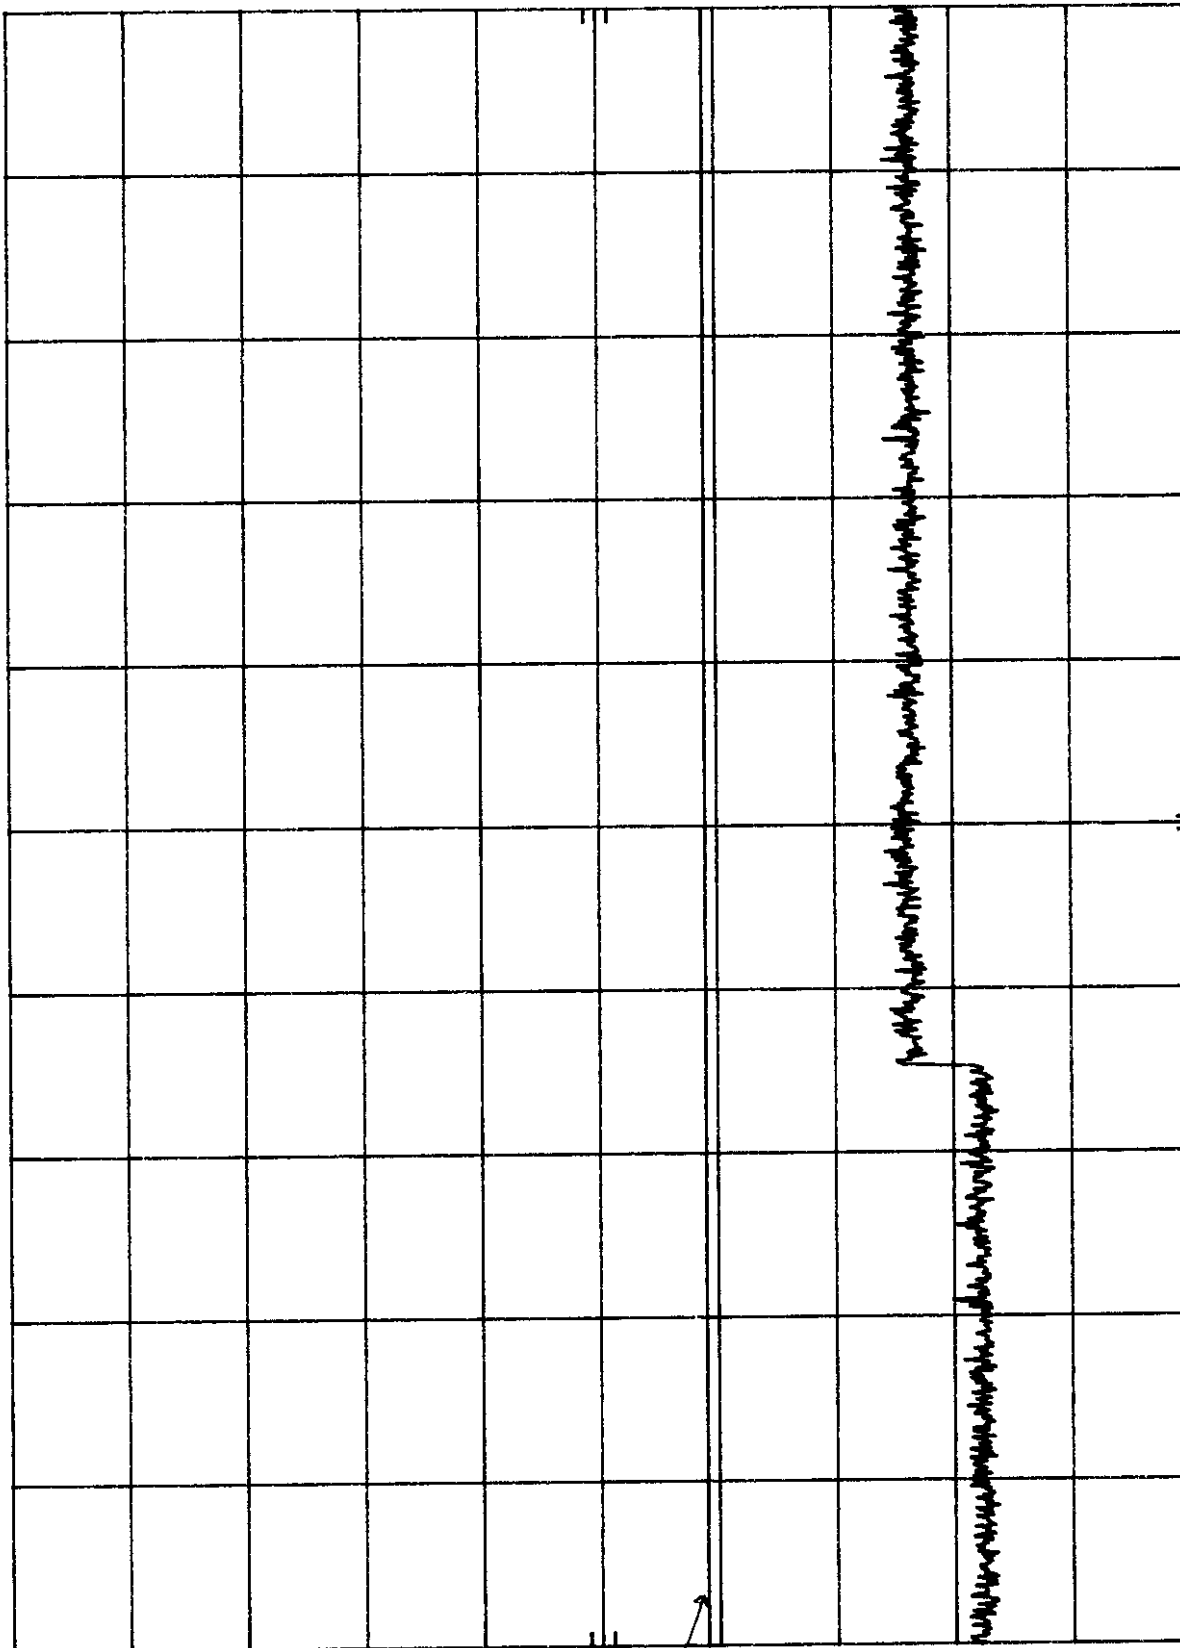

START 3.50 GHz RES BW 30 kHz VBW 100 kHz STOP 10.00 GHz SWP 19.5 sec

PAB-2EG-HMS ANTENNA CONDUCTED SPURIOUS

MKR 865 MHz
-5.90 dBm

REF 46.0 dBm ATTEN 10 dB

HP

10 dB/

POS PK

OFFSET

46.0

dB

DL

-13.0

dBm

MARKER

865 MHz

-5.90 dBm

67dBc

F0C LIMIT

WITH NOTCH
to Reduce power at
fundamental

FILTER AT SPECTRUM ANALYZER
INSURE NO OVERLOAD

START 800 MHz

RES BW 30 KHz

VBW 100 KHz

STOP 2.50 GHz

SWP 5.10 sec

PA8-2EG-HMS
ANTENNA CONDUCTED SPURIOUS

MKR 3.460 GHz
-26.70 dBm

hp REF 46.0 dBm ATTN 10 dB

10 dB/

POS PK

OFFSET

46.0

dB

DL

-13.0

dBm

MARKER

3.460 GHz

-26.70 dBm

67 dBc
FCC LIMIT

→ 4th HARMONIC (of 86 MHz)


START 2.50 GHz

RES BW 30 kHz

VBW 100 kHz

STOP 10.00 GHz

SWP 22.5 sec

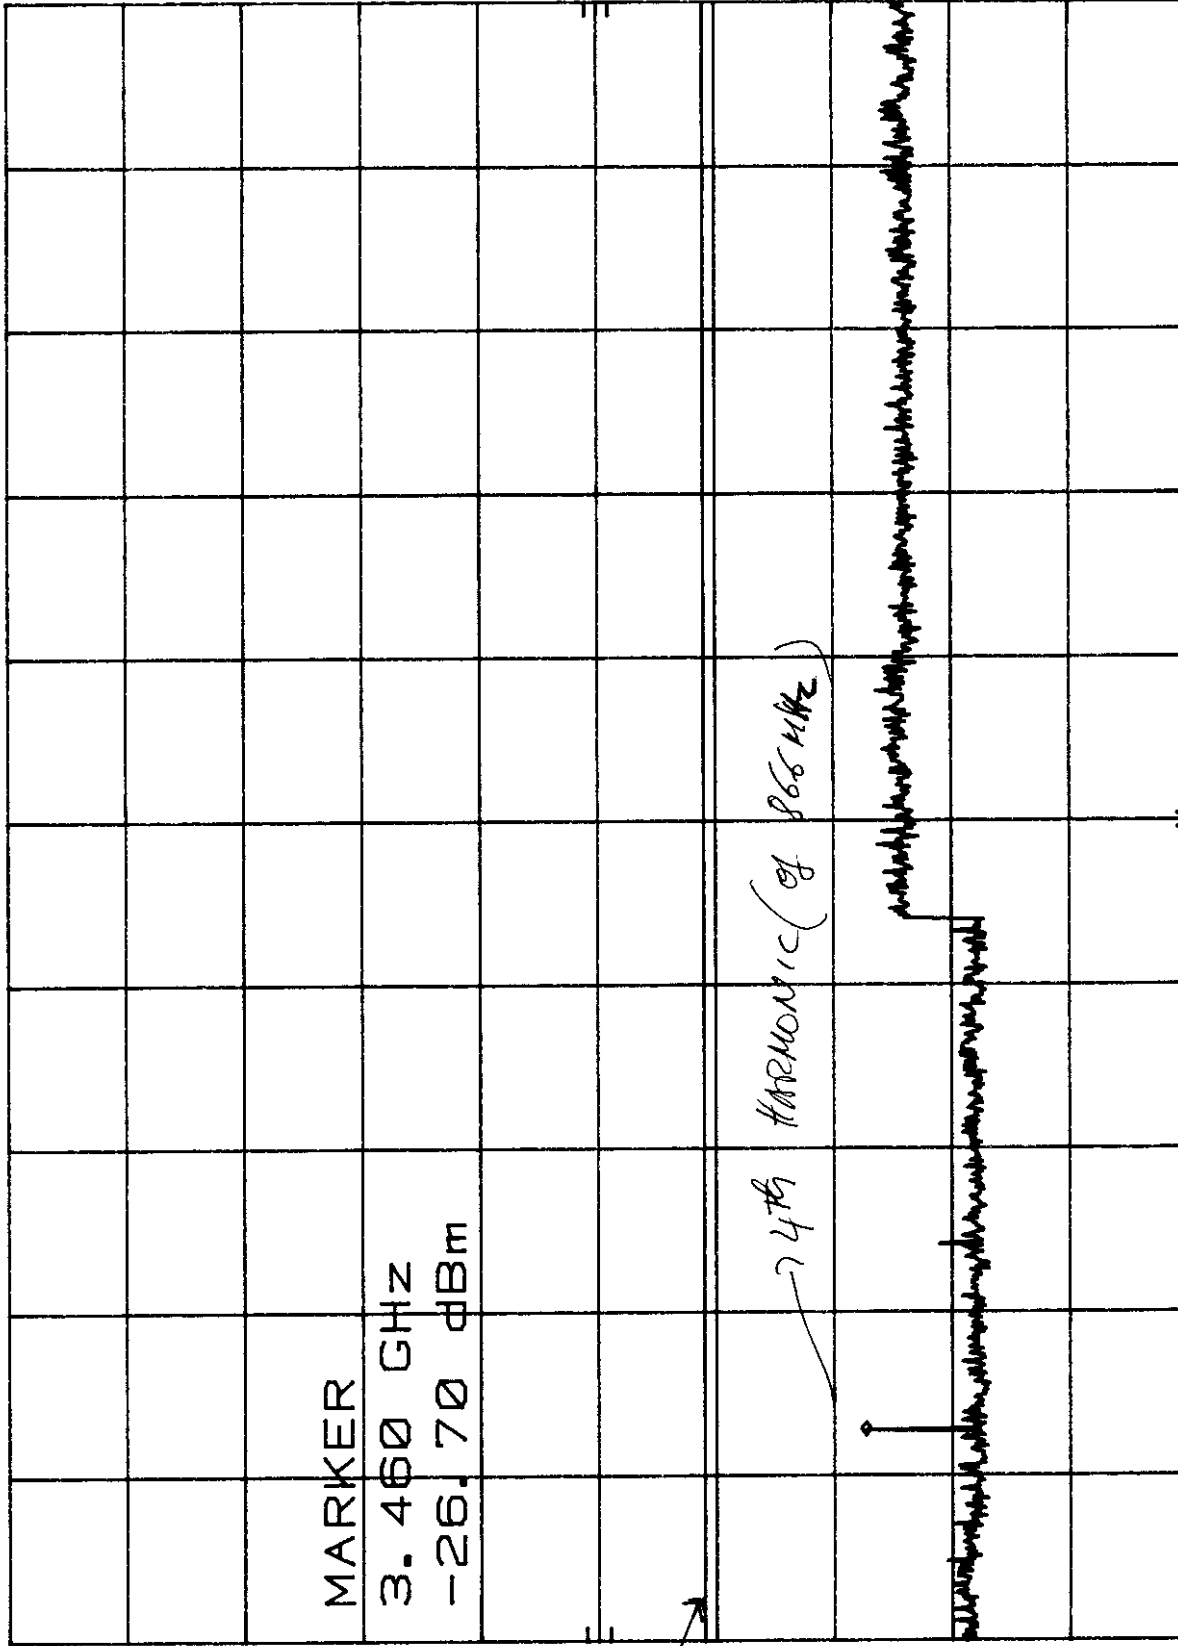

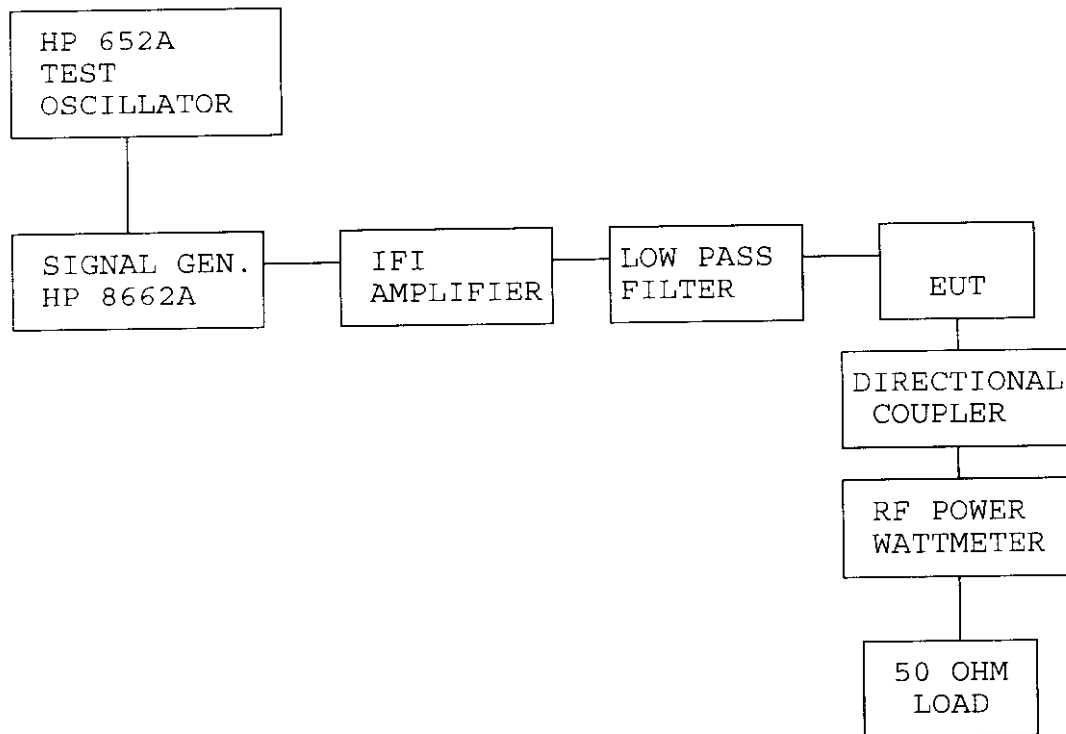


FIGURE 4. BLOCK DIAGRAM.
(SPURIOUS EMISSIONS TEST)

2.983(e)(5) **Measurement of Radiated Spurious Emissions Per 2.993**

Definition: Emissions from the equipment when connected into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired. The reduction in the level of these spurious emissions will not effect the quality of the information being transmitted.

Test Method: Per EIA RS 152-B.

Connect the equipment and follow the procedure described in paragraph 2.2.1.1 and paragraph 5.0. Measure the amplitude of each spurious radiated signal through the 10th harmonic. The level in dBuV/m is calculated on the following page. The spurious signals are then measured on the 3 meter range.

$$\text{Spurious attenuation dB} = 10 \log \frac{\text{Po Watts}}{\text{Calc spurious pwr}}$$

Test Results: See TABLE I.

All Radiated spuirious emissions are below the FCC specifications.

SPURIOUS RADIATED SIGNAL MEASUREMENTS

(Ref: Part 2, Subpart J, 2.991 & 2.993)

Date <u>3-4-98</u>	Pass <u>X</u> Fail <u> </u> (at Freq. <u> </u>)
EUT <u>RF Power Amplifier</u>	Operating Power <u>250 Watts</u>
Part No. <u>PA8-2EG-HMS</u>	Operating Mode <u>Saturated</u>
Serial No. <u> </u>	Test Engineer <u>Ryan Boas</u>

FREQUENCY TUNED TO 851 MHz

ANT POL	FREQ MHz	SPECTRUM ANALYZER (dBμV)	ANT. FACTOR (dB)	CABLE LOSS (dB)	AMP GAIN (dB)	dBμV/m	FUND FIELD STRENGTH dBμV/m	SPUR BELOW CARR- IER (dBc)
V	1702	81.1	27.0	3.7	30.5	81.3	151.4	70.1
V	2553	75.7	29.5	4.2	30.5	78.9		72.5
V	3404	73.1	32.0	5.5	30.5	80.1		71.3
V	4255	72.2	33.6	6.3	30.5	81.6		69.8
V	5106	78.0	34.0	7.0	42	77.0		74.4
V	5957	74.0	35.3	7.8	42	75.1		76.3
V	6808	69.1	36.9	8.3	42	72.3		79.1
V	7659	66.8	37.3	8.9	42	71.0		80.4
V	8510	66.3	38.1	9.6	42	72.0		79.4

Fundamental Field Strength (V/m) = $1/3 (R_o \times P_o)^{1/2}$

R_o = Amplifier Output Impedance (Ohms)

$$1/3 (50 \cdot 250)^{1/2} = 37.23 \text{ V/m}$$

P_o = Amplifier Output Power (Watts)

Conversion From μV/m to dBμV/m = $(\mu\text{V/m})^{\log} \times 20$

$$37,230,000^{\log} \cdot 20 = 151.4 \text{ dBμV/m}$$

$$\text{FCC Limit} = 66.9 \text{ dBc}$$

SPURIOUS RADIATED SIGNAL MEASUREMENTS

(Ref: Part 2, Subpart J, 2.991 & 2.993)

Date <u>3-4-98</u>	Pass <u>X</u> Fail <u> </u> (at Freq. <u> </u>)
EUT <u>RF Power Amplifier</u>	Operating Power <u>250 Watts</u>
Part No. <u>PA8-2EG-HMS</u>	Operating Mode <u>Saturated</u>
Serial No. <u> </u>	Test Engineer <u>Dynan Boarss</u>

FREQUENCY TUNED TO 851 MHz

ANT POL	FREQ MHz	SPECTRUM ANALYZER (dBμV)	ANT. FACTOR (dB)	CABLE LOSS (dB)	AMP GAIN (dB)	dBμV/m	FUND FIELD STRENGTH dBμV/m	SPUR BELOW CARRIER (dBc)
H	1702	81.5	27.0	3.7	30.5	81.7	151.4	69.7
H	2553	77.9	29.5	4.2	30.5	81.1		70.3
H	3404	72.5	32.0	5.5	30.5	79.5		71.9
H	4255	72.7	33.6	6.3	30.5	82.1		69.3
H	5106	78.0	39.0	7.0	42	77.0		74.4
H	5957	75.3	35.3	7.8	42	76.4		75.0
H	6808	73.9	36.9	8.3	42	77.1		74.3
H	7659	69.6	37.3	8.9	42	73.8		77.6
H	8510	69.6	38.1	9.6	42	75.3		76.1

$$\text{Fundamental Field Strength (V/m)} = 1/3 (R_o \times P_o)^{1/2}$$

R_o = Amplifier Output Impedance (Ohms)

P_o = Amplifier Output Power (Watts)

$$\text{Conversion From } \mu\text{V/m to dB}\mu\text{V/m} = (\mu\text{V/m})^{\log} \times 20$$

$$37,230,000^{\log \cdot 20} = 151.4 \text{ dB}\mu\text{V/m}$$

$$\text{FCC Limit} = 66.9 \text{ dBc}$$

2.983(e)(6) **Measurement of Frequency Stability Per 2.995**

The EUT is a power amplifier and contains no circuitry for generating or stabilizing the RF signal. The driver will be responsible for this task.

2.983(e)(7) **Frequency Spectrum to be Investigated per 2.997**

The frequency was searched from the lowest radio frequency generated in the equipment through the 10th harmonic of the carrier frequency.

2.983(h) **Description and Test Data For Encoding Device(s)**

This section does not apply.

2.983(i) **Type acceptance Data For an External Power
Amplifier Used In Amateur Radio Service - Part 97**

This section does not apply

APPENDIX A
TEST EQUIPMENT

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

<u>MANUFACTURER</u>	<u>DESCRIPTION</u>	<u>MODEL</u>
Hewlett Packard	Spectrum Analyzer	8566B
Hewlett Packard	Spectrum Analyzer	8568B
Hewlett Packard	Quasi Peak Adapter	85650A
Hewlett Packard	Computer/Controller	9825T
Hewlett Packard	Frequency Counter	5245L
Hewlett Packard	Printer	9876A
Hewlett Packard	Counter Plug-in	5253B
Hewlett Packard	Plotter	9872C
Hewlett Packard	Plotter	7470A
Hewlett Packard	Frequency Synthesizer	9662A
Hewlett Packard	Sweep Main Frame	8620C
Hewlett Packard	Plug-in 2-22 GHz	26290B
Polarad	Signal Generator 3.7 to 8.4 GHz	1107E
Telonics	Sweep Generator	4053A
Wiltron	Sweep Generator	6653A
Hewlett Packard	Signal Generator	614A
Hewlett Packard	Signal Generator	616B
Hewlett Packard	Signal Generator	618B
Hewlett Packard	Signal Generator	620B
Hewlett Packard	Signal Generator	626A
Hewlett Packard	Signal Generator	628A
Hewlett Packard	Signal Generator	8654A

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

Hewlett Packard	Signal Generator	8662A
Hewlett Packard	RF Voltmeter	3406A
Solar	Pulse Generator	8282-1
Solar (2)	Clamp on Probe	6747-1
Electro-Metrics	Clamp on Probe	PCL-10
Electro-Metrics	Clamp on Probe	PCL-25
Electro-Metrics	Loop Sensor	ELS-10
Electro-Metrics	Electro-Static Field Probe	EFP-25
Electro-Metrics	LISN	FCC-5-2
Solar	LISN	8012-50-r-24 BNC
Solar	Audio Isolation Transformer	6220-1A
Solar	Isolation Transformer	7032-1
Solar (14)	10 mfd Capacitors	6212-106R
Schaffner EMC, Inc.	Absorbing Clamp	MDS 21
Solar	100 W Audio Amplifier	6552-1A
Solar (2)	LISN	8018-50-TS-24 BNC
Stoddart	FIM	NM-12T
Krohn-Hite	Audio Oscillator	4400
Stoddart	FIM	URM-6
IFI	Field Strength Meter	EFS-1
Solar	Precision Resistor	7144-1.0
Solar	Precision Resistor	7144-10.0
Solar	Coupling Network	7835-891

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

Solar	Coupling Network	7835-896
Solar	LISN (5 μ h)	6338-5
Solar	LISN (50 μ h)	6338-57
Solar	High Pass Filter	7205-.35
Solar	High Pass Filter	7205-2.4
Mini Circuits	Amplifier Wide Band	ZHL42
Mini Circuits	Amplifier Wide Band	ZHL-1042J
Mini Circuits	Amplifier Wide Band	ZHL32A
Mini Circuits	Amplifier Wide Band	ZHL-1A
Mini Circuits	Amplifier Wide Band	ZHL2-8
ENI	Amplifier	510L
ENI	Amplifier	350L
Hewlett Packard	Preamplifier	11975A
Hewlett Packard	Preamplifier	8349A
IFI	1 kHz - 200 MHz Amplifier (15 Watt)	5300L
Narda	400 W 50 Ω Load	376NM
Eaton	WBA 500 - 1000 MHz	15100B
ENI	WBA 250 KHz - 150 MHz	3100LA
ENI	WBA 1.5 - 500 MHz	5501
Avantek	Low Noise Amplifier 6-12.4 GHz	AFT12635
Hewlett Packard	500 MHz Digitizing Oscilloscope	54111D
Tenney	Temperature Chamber	THjr

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

Hewlett Packard	5 Hz - 200 MHz Network Analyzer	3577A
Hewlett Packard	Frequency Doubler	11721A
Hewlett Packard	Harmonic Mixers	11970A
Hewlett Packard	Harmonic Mixers	11970K
Hewlett Packard	Computer/Controller	9836
Hewlett Packard	Computer/Controller	9826
Avantest	Spectrum Analyzer	TR4131E
Hewlett Packard	Spectrum Analyzer	8558B
Hewlett Packard	Spectrum Analyzer	8554L
Hewlett Packard	Pulse Generator	212A
Hewlett Packard	Pulse Generator	214A
Hewlett Packard	Pulse Generator	215A
Tektronix	Oscilloscope	453A
John Fluke	High Voltage power Supply	408A
LeCroy	Digital Storage Scope (125 MHz)	9400
Biddle	Micro Ohm Meter	247800
Hewlett Packard	Pulse Modulator	11720A
Topaz	Ultra Isolation Transformer (2.5 kVA)	0211T21SR
ENI	Ultra Isolation Transformer (2.5 kVA)	91002-22
Singer (5)	Current Probe	91550-2
Stoddart (4)	Current Probe	91550-1

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

Hewlett Packard	Dual Directional Coupler	778D
Narda	Dual Directional Coupler	3022
Narda	Directional Coupler	3045C-20
Narda	Directional Coupler	3003-20
Narda	Directional Coupler	3002-10
Narda	Directional Coupler	23964
Narda (2)	Directional Coupler	22355
Narda	Power Divider	4326-2
Narda	Power Divider	4035C
Narda	Power Divider	4033C
Englemann	Power Divider	PSK-210
Bird	50 Ω Load 10 W 50's	80-53
Stoddart	50 Ω Load	90514
Micro Lab	50 Ω Load	TB-5MN
Tekscan	50 Ω Attenuator Kit	FP-50
Tenuline	50 Ω 100 W 20 dB Attenuator	8343-200
Micro Lab	50 Ω 40 dB Attenuator	AD-40N
Hughes	20 Watt TWT L Band	1277H04
Hughes	20 Watt TWT C Band	1277H04
Hughes	10 Watt TWT S Band	1177H
Hughes	10 X/Ku Band	1177H
IFI	2kW cw 1 kHz - 200 MHz Wide Band Power Amp	410ULP
DNB Engineering	EMP Pin/Wire Test Set	844

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

ANTENNAS

<u>MANUFACTURER</u>	<u>DESCRIPTION</u>	<u>MODEL</u>
AIL (3)	Dipole	DM105A-T1, T2, & T3
EMCO	Biconical	3109
EMCO	Log Periodic	3146
EMCO	Parallel Element	3107
Eaton	Vertical Rod	74607-1
Eaton (2)	Vertical Rod	75492-1
Ailtech	Loop	94608-1
Singer	Loop	LP-105 ASC
Electro-Metrics (2)	Biconical	BIA-25
Electro-Metrics (2)	Conical Log Spiral	LCA-25
Electro-Metrics (2)	Loop	ALP-10
Electro-Metrics (2)	Loop	ARL-25
Electro-Metrics (2)	Broadband Dipole	DBA-25
Electro-Metrics (3)	Turnable Dipole	TA-25, 25-1, & 25-2
EMCO	Double Ridge Guide	311525
Electro-Metrics (2)	Vertical Rod	RVR-25
Alpha	Standard Gain Horn	K861
Alpha	Standard Gain Horn	A861
Alpha	Standard Gain Horn	KV861
Solar	Loop Antenna	7429-1
Electro-Metrics	E Field SensorHorn	EFP-25