



Contents

Our Thanks, The CB Story and Customer Assistance	A1
29 LX Features and FCC Regulations	A2
Installation	
Location	2
Mounting and Connection	2
PA (Public Address)	4
CB Antenna	4
Operation	
Turning On	5
Setting AM/FM	5
Setting Channel Selector	5
Calibrate for SWR (Standing Wave Ratio)	6
S/RF Meter	7
To Receive	7
Selecting a Channel	7
S-Meter	7
To Transmit	8
Setting Dynamike®	8
External Speaker	8
Front Panel Controls	9
NB-ANL/Off (Noise Blanker/Automatic Noise Limiter) Button	9
RF Gain Control	9
Program Memory Channels	10
Scan CB Channels	11
Scan Memory Channels	11
Dimmer Control	11
Setting Squelch	11
Menu Mode	12
Setting the Clock	13
Setting the Alarm Clock	13
Setting the Count Down Timer	14
Key Tones Mode	14
Weather Information	15
What You Should Know About Weather	16
Setting Weather Alert Mode	16
Setting Weather Alert Scan	16
Weather Auto Scan	16
Setting Weather Auto Scan	16
Setting Display Color	17
Setting Brightness	18
Setting Contrast	18
Radio Check Mode	19
Utility Mode (Software Version and Factory Reset)	20
Base Station Operation (From 120V House Current)	21
Temporary Mobile Operation	21
How Your CB Can Serve You	22
A Few Rules You Should Know	22
Set Channel 9 For Emergencies	22
CB Distress Data	23
CB 10-Codes	24
Frequency Ranges	25
29 LX Specifications	26
Limited 2-Year Warranty	27
FCC Statement	28
Need Help?	30
Replacement Parts & Accessories	31



Installation


Location

Plan for the location of the CB transceiver and microphone bracket before starting the installation. Select a location that is convenient for operation, yet does not interfere with the driver or passenger.

The transceiver is usually mounted to the underside of the dash with the microphone bracket beside it.


NOTE: The transceiver is held in the universal mounting bracket by two thumbscrews which allow for adjustment to a convenient angle. The bracket includes two self-tapping screws and star washers. The mounting must be mechanically strong and conveniently located.

Mounting and Connection

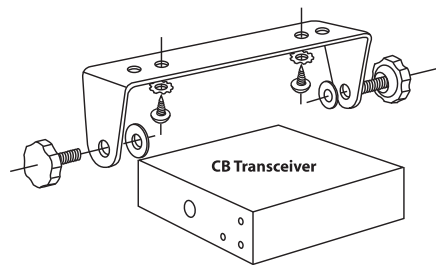

1. Hold the radio with the mounting bracket in the exact desired location. If there is no interference, remove the bracket and use it as a template to mark the location for the mounting screws.

2. Drill the holes and secure the bracket.

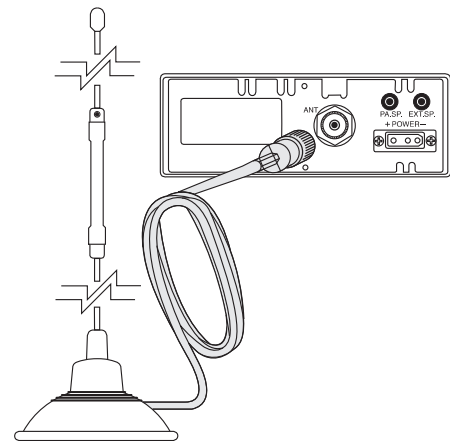


3. Connect the antenna cable plug to the receptacle marked "ANT" on the back of the unit.

2



Installation

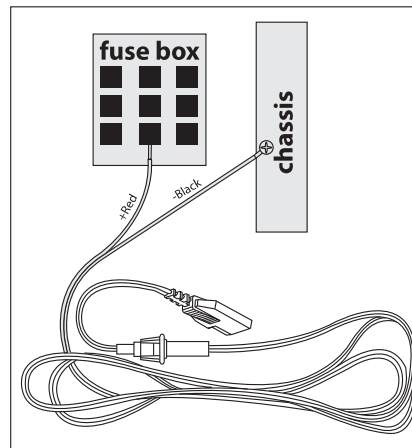


4. Connect the red lead of the DC power cord to an accessory 12 volt fuse or directly to the battery.

NOTE: The transceiver is held in the universal mounting bracket by two thumbscrews which allow for adjustment to a convenient angle. The bracket includes two self-tapping screws and star washers. The mounting must be mechanically strong and conveniently located.


5. Connect the black lead to the negative side of the vehicle electrical system. This is usually the chassis.

Any convenient location with a good electrical contact (remove paint) may be used.


NOTE: Before installing the CB radio, visually check the vehicle's battery connection to determine which terminal is positive or negative. A negatively grounded vehicle has its negative lead grounded to the chassis.

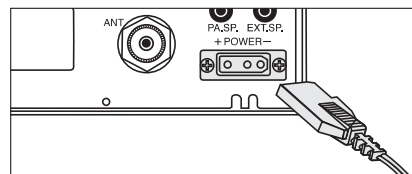

6. Plug power cable into back of unit marked "Power". Be sure to observe polarity markings.



7. The microphone can be mounted to either side of the CB using the supplied screws. Alternatively the microphone can be mounted to the dash or any convenient location.

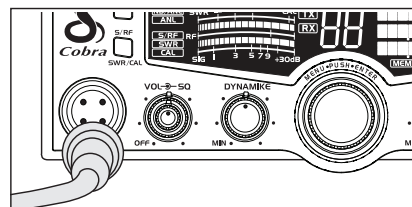

8. Attach the microphone to the front of the CB.


NOTE: If the microphone is not connected, audio will not be heard at the speaker.

3




Installation

PA (Public Address)

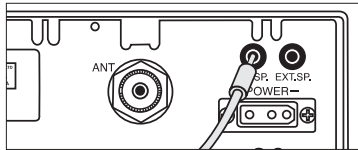


1. Connect an external PA speaker to the PA jack on the rear panel.
2. Press the CB/PA/WX button to change modes.

NOTE: The PA speaker should have 8-ohm impedance and be rated to handle at least 4.0 watts. The speaker should be directed away from the microphone to prevent acoustic feedback. Activity on the CB channel will be heard through the PA speaker. Adjust the Volume Control to a normal listening level.

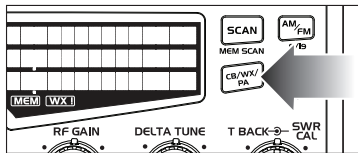

CB Antenna

Since the maximum allowable power output of the transmitter is limited by the FCC, the antenna is critical in affecting transmission distance. Only a properly matched antenna system will allow maximum power output. Cobra loaded type antenna models are highly recommended for most installations. Consult your Cobra dealer for further details, or call 800-543-1608 and speak to a Cobra representative. A standard antenna connector is provided on the transceiver for easy connection.

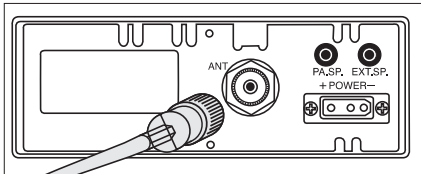

For optimum performance in passenger cars the ideal antenna location is on the center of the roof. Second choice is on the center of the trunk. Because many newer trucks feature fiberglass door skins, the outside mirror must be grounded to the chassis via a ground strap when the antenna is mounted on the mirror bracket.

3-way combination antennas are also available which allow operation of all three bands (AM-FM & CB), using a single antenna. However, this type of antenna usually results in less than normal transmit and receive range when compared to a standard-type "Single Band" CB antenna.


Cobra offers CB antenna and mounting solutions that can be purchased online. Please visit www.cobra.com, or if you'd like to speak with an expert, please call 800-543-1608 and our Customer Care Group can assist.




Operation

Turning On Your CB


Make sure the power cord, antenna and microphone are connected to their proper connectors before starting.

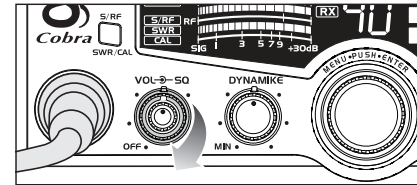

1. Rotate the On/Off Volume knob clockwise to turn unit on and adjust to a normal listening level.

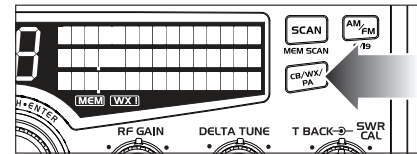


2. Press the CB/PA/WX button to change modes.

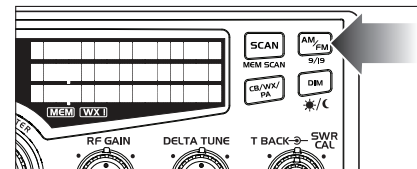

Setting AM/FM

The 29 LX CB allows for communications on either AM or FM modes. Each mode operates under Channels 1 - 40. AM is the default mode.

To change between AM/FM modes, quick press the AM/FM button to the desired operating mode. Once selected, selected mode (AM or FM) will appear to the right of the displayed channel on the LCD.

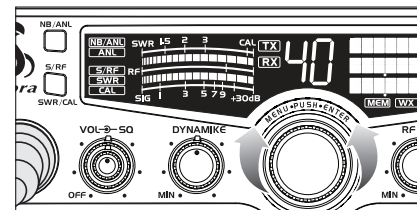

Setting Channel Selector

Select one of forty channels and adjust volume. The selected channel (1 through 40) will be indicated by the readout directly above the channel selector knob




Operation


Calibrate for SWR (Standing Wave Ratio)

SWR calibration is done to properly adjust the length of the antenna and to monitor the quality of the coaxial cable and all RF connections.


This calibration is critical in order to achieve optimum performance.

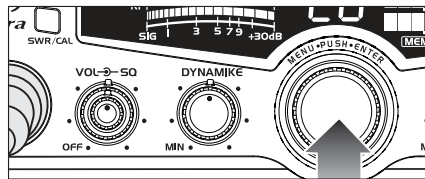


1. Select channel 20.

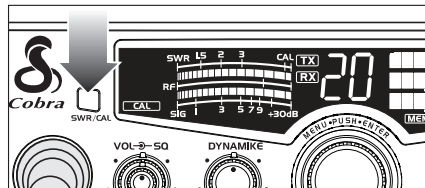

2. Press SWR/CAL button to select CAL.



3. Push and hold the mic button.

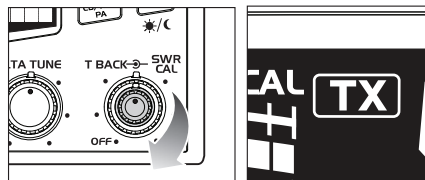


4. While holding mic button adjust the SWR CAL knob so the meter swings to the CAL mark (located on the right).




Operation

Calibrate for SWR continued

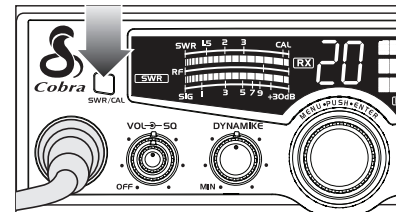

5. Release the PTT button, press and release the S/RF-SWR CAL button to the SWR position. Then press the PTT button to read the SWR reading.

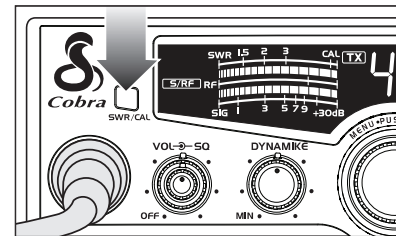

6. Repeat the same steps two through five on Channel 1 and 40. This will check SWR for all channels.

S/RF Meter

This meter swings proportionately to the RF output (outgoing signal) while transmitting. The S/RF-SWR-CAL button must be in the S/RF mode.

To Receive

Rotate the On/Off Volume knob clockwise. The RX icon will be displayed.



Selecting a Channel

Unit should be in CB mode. Rotate channel selector clockwise or counter-clockwise to select desired channel.

S-Meter


Swings proportionately to strength of incoming signal when receiving.

The S/RF-SWR-CAL switch must be in the S/RF setting to read the meter.

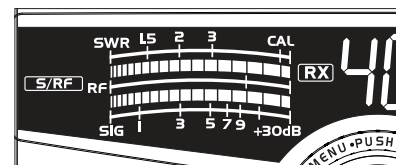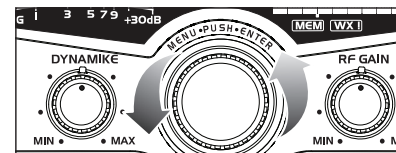




Operation

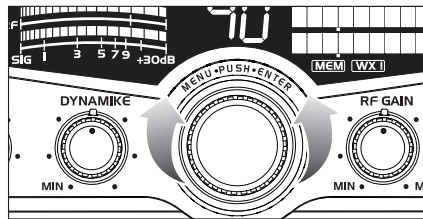

PUSH & HOLD



To Transmit

1. Select the desired channel.
2. Push and hold mic button to transmit. Transmitter is now activated. When transmitting, hold the microphone two inches from your mouth and speak in a clear, normal voice. Release to receive.

NOTE: Be sure the antenna is properly connected to the radio before transmitting. Prolonged transmitting without an antenna, or a poorly matched antenna, could cause damage to the transmitter.

Be sure to read the F.C.C. Rules and Regulations included with this unit before transmitting.

Setting Dynamike®

Initially, set fully clockwise so that maximum voice volume is available. Dynamike may have to be reduced in some conditions.

External Speaker

The external speaker jack is used for remote receiver monitoring.

Connect an external speaker to the external speaker jack on the rear panel.


NOTE: The external speaker should have 8-ohm impedance and be rated to handle at least 4.0 watts. When the external speaker is plugged in, the internal speaker is automatically disconnected. See accessory page X.

NOTE: Cobra external speakers are rated at 10 watts.



Operation

Front Panel Controls

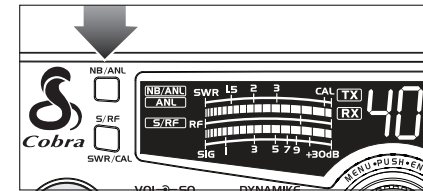

NB-ANL/OFF (Noise Blanker/Automatic Noise Limiter) Button

When switched to ANL the Automatic Noise Limiter is activated. This helps reduce noise created by the vehicle's electronics.

When switched to NB/ANL mode the RF Noise Blanker is also activated, providing increased noise filtration.

When switched to OFF mode all noise filtration will be turned off.


NOTE: The RF noise blanker is very effective in reducing repetitive noises such as ignition interference.

RF Gain Control

The RF Gain is used to optimize reception in strong or weak signal areas.


Rotate the RF Gain knob counterclockwise to reduce gain in strong signal areas. In weak signal areas turn clockwise to increase gain.

NOTE: The RF Gain is used to optimize reception in weak signal areas.

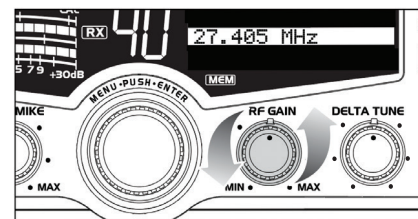



Operation

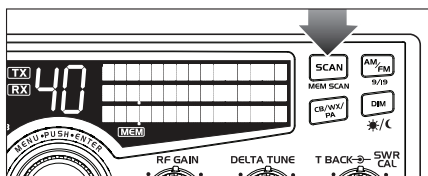


Program Memory Channels


1. Set first channel. Press and hold Scan/MemScan button. Memory icon will appear. Select second channel, press and hold Scan/MemScan button again until Memory icon appears. Repeat above steps to enter up to 10 channels in memory.

NOTE: The radio should be squelched before scan features are activated.

NOTE: Keying the microphone will stop the scan feature.

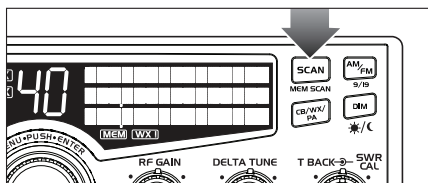

2. Pressing the Scan/Memory Scan button toggles from Off to Scan All Channels to Memory Channel Only Scan and back to Off.

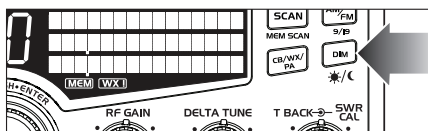

3. Press PTT on microphone to end Scan and return to CB mode.

NOTE: If more than 10 channels are attempted to be programmed, 3 error beeps will be heard and "Memory Full" will be displayed for 10 seconds or until any button is pushed.

NOTE: To remove a channel from memory, go to the unwanted memory channel then press and hold the scan button until the MEM icon turns off.

NOTE: If in WX mode the unit will scan Weather channels.



Operation




Scan CB Channels

To scan all 40 CB channels, the unit must be squelched. Press and release Scan/Mem Scan button once.



Scan Memory Channels

To scan memory channels, press and release Scan/Mem Scan button twice.

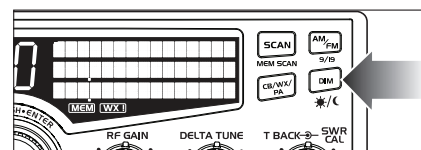


Dimmer Control

Press Dim to toggle between brightness settings for Day and Night modes.

Press and Hold Dim to toggle between Day and Night modes.

See color and brightness setting instructions for Day and Night modes starting on page 17.

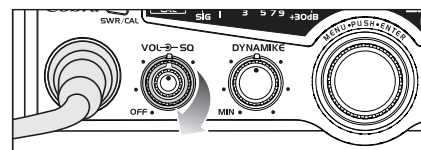


Setting Squelch

Squelch is the "control gate" for incoming signals.

1. Full clockwise rotation closes the gate allowing only very strong signals to enter.
2. Full counterclockwise rotation opens the "gate" allowing all signals in.
3. To achieve the Desired Squelch Setting (DSS), turn the Squelch control counterclockwise until you hear noise


Now turn the control clockwise just until the noise stops. This is the DSS setting.

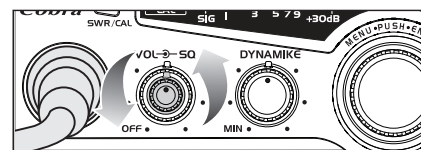




Operation

Menu Mode

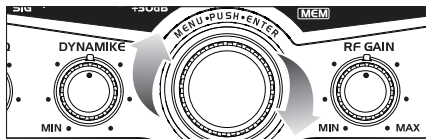


Used to program special features. Menu/Enter knob is used to move cursor to desired feature to program.

Rotate Menu/Enter knob clockwise to navigate menu levels.

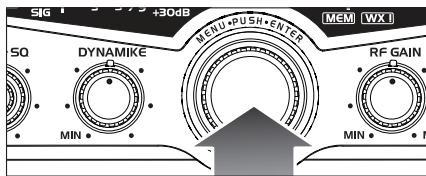


NOTE: To exit from Menu Mode, you can select Exit from the Menu, wait for the Menu to "time out," or press the PTT switch (from the microphone).

Level 1:




Level 2:




Level 3:




Level 4:



Level 5:



Operation



Setting the Clock

Using the clock, alarm and countdown functions.

To set the clock, press Menu/Enter knob and select Set Clock.


NOTE: Normal display will appear if clock has not yet been set.

12:00 PM will appear in the display and the hours will flash. Rotate Menu/Enter knob clockwise to select desired hour and press to set.

The minutes will then flash. Rotate Menu/Enter knob again to select desired minutes and press to set.

Once the minutes are set, AM or PM will then flash. Rotate Menu/Enter knob again to select AM or PM then press and release to exit to SET CLOCK menu.

NOTE: Use the PTT switch to exit from any MENU level back to CB standby mode.



Setting the Alarm Clock

Your 29 LX can be utilized as an alarm clock. To set the alarm, press Menu/Enter knob and select Set Alarm.

Rotate Menu/Enter knob clockwise to select Set Alarm Time. Follow instructions above for setting the alarm time and AM or PM.

NOTE: The clock should be connected to constant 12V to run continuously.



Operation



After the alarm setting is complete, there is an option to Set Snooze, Alarm Length and Exit.


Enter desired snooze time (from 1 to 60 minutes). Select Enter to exit, return to Set Snooze or Alarm Length. Select Alarm Length to set alarm duration (from 10 to 300 seconds). Pressing Menu/Enter knob returns unit to exit, Set Snooze or Alarm Length.

To set the clock, press Menu/Enter knob and select Set Clock.

NOTE: Default snooze time length is 10 minutes.

NOTE: Use the PTT switch to exit from any MENU level back to CB standby mode.

NOTE: Default alarm length is 60 seconds and is set in 10 second increments.




Setting the Count Down Timer

To set the count down timer, press Menu/Enter knob and select Set Count Down.

In order to use the Count Down Timer function, you will need to select Count Down (first Menu option) and set it to ON by push and release with the Menu knob.

Next, Select Set Count Down and set the hours and minutes by turning the Menu knob to the desired time, then push and release to save your settings.

NOTE: The clock should be connected to constant 12V to run continuously.



Key Tones Mode

Press Menu/Enter knob and rotate clockwise to Set Key Tones. Press Menu/Enter to set Key Tones On/Off. Press Menu/Enter knob to select On/Off and exit to main menu.



Operation

Weather Information

What You Should Know About Weather

If threatening weather is nearby, the National Weather Service may broadcast a 10 second alert tone. This tone will be heard through the CB, even if the CB/WX Control is in the CB mode or the unit is turned off.

This enables you to monitor CB frequencies and still be warned by the National Weather Service Emergency Alert. When you hear the alert, press the CB/WX/PA button in the WX mode. You will then be able to hear the Weather Warning Broadcast.

Your 29 LX has a special auto squelch circuit for weather transmission which disables your squelch control.

NOTE: If you wish to receive a listing of NOAA 'Weather Radio Transmitter Locations, contact your nearest National Weather Service Office.

Service Office, or write to:
National Weather Service
(Attn: W/OM11) NOAA
Silver Springs, MD 20910.

For ideal weather reception use a dual band antenna (center load/baseload).


Weather Channels

What is Weather Radio?

NOAA Weather Radio (NWR) is a service of the National Oceanic and Atmospheric Administration (NOAA), of the U.S. Department of Commerce. 380 NWR stations are in operation by the U.S. Government in addition to several NWR stations that are maintained by private interest groups. The capability is to supplement warnings by sirens and by commercial radio and television. The 10 National Weather Channels provide full coverage to keep you informed of weather conditions, 24 hours a day, 7 days a week.




Operation



Setting Weather Alert Mode

1. Turns WX Alert On/Off. Default is Off. Press Menu/Enter knob to select Set WX Alert. If Weather is On, WX Alert Icon will be displayed.
2. Press Menu/Enter knob to select On/Off and exit to main menu.




Setting Weather Alert Scan

1. Press Menu/Enter knob and rotate clockwise to WX Alert Scan. Press Menu/Enter knob to select On/Off.
2. Press Menu/Enter knob to select On/Off and exit to main menu.

NOTE: If an alert is detected the unit will activate WX mode on the channel with the alert. Use Menu/Enter knob to select On/Off and press to set.

Weather Auto Scan

Weather Auto Scan automatically searches for the strongest weather station in the background. When found, it will remain on that active weather station providing you instant access to weather information when needed.

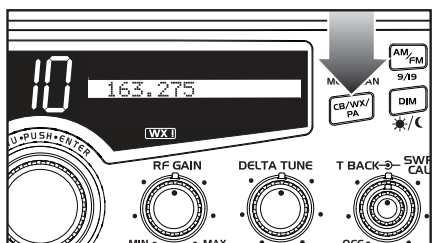

Setting Weather Auto Scan

1. Press Menu/Enter knob and rotate clockwise to WX Auto Scan. Press Menu/Enter knob to select On/Off.
2. Press Menu/Enter knob to select On/Off and exit to main menu.



Operation




Setting Display Color

1. Select Menu/Enter knob and scroll down to select Display Color options. There are two choices for color selection: Day or Night.



2. Select Day or Night Mode by rotating the Menu/Enter knob. Press and Release Menu/Enter knob to select.

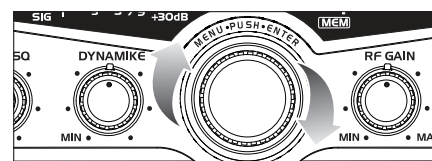

3. Rotating Menu/Enter knob clockwise changes the display color (from green to blue to amber to red then back to green).

4. Press Menu/Enter knob to select color. Select Exit to return to main menu.

NOTE: Use the PTT switch to return to CB standby mode.



Operation



Setting Brightness

Select Menu/Enter knob and scroll down and select Brightness to adjust the level. Brightness can be adjusted for both Day and Night Modes.

1. To adjust, use the Menu/Enter knob to select Day or Night options. Push and release to select.
2. Select Day Option 1 or Day Option 2 by pressing the Menu/Enter knob. Rotate the knob to adjust the brightness level.
3. Select Exit to go back to previous Day or Night options or press PTT on the microphone to go back to CB Mode (Exit the Menu completely).

Once Day Options have been adjusted, you can switch between either brightness level from the DIM switch on the front panel.

NOTE: If an attempt is made to exceed the highest or lowest brightness levels, 1 error beep will be heard.



Setting Contrast


1. Press Menu/Enter knob and rotate clockwise to select Set Contrast. Press Menu/Enter knob again and rotate clockwise to increase contrast, counter-clockwise to decrease contrast.
2. Press Menu/Enter knob to set contrast.

NOTE: If an attempt is made to exceed the highest or lowest contrast levels, 1 error beep will be heard.

NOTE: For optimum viewing, contrast level should be adjusted for each color.



Operation



Radio Check Mode

Allows testing of important radio functions.


Test 1 - Battery Level: Confirms that battery voltage level is between 10.8 V to 15.8 V. If in that range, it is "PASS". Outside of that range, either "FAIL LOW" or "FAIL HIGH" will be displayed. Press Menu/Enter knob to advance to next test.

NOTE: Use the PTT switch to return to CB standby mode. If 10 seconds pass or if Enter button pressed, unit goes to 2nd test.



Test 2 - RF Power Output: Confirms 3.3 to 4 Watt output level. Once Push-to-Talk button is pressed, Pass or Fail will be displayed if level is outside limits.

NOTE: Press Push-to-Talk within 10 seconds or unit will go to the next test. Press Dim/Escape button to return to CB standby mode. If 10 seconds pass or if Enter button pressed, go to 3rd test.



Test 3 - Antenna Mismatch Warning: Press Push-to-Talk button to check antenna/radio for proper matching.



NOTE: Use the PTT switch to return to CB standby mode. If 10 seconds pass or if Enter button pressed, testing is complete. Unit will return to CB Standby mode.



Operation

Utility Mode (Software Version and Factory Reset)

Utility Menu options displays the current software version or returns the unit to its original factory settings. To view software version, rotate Menu/Enter knob clockwise to select Settings then Software Version.



1. To restore default settings, Press Menu/Enter knob again. Rotate Menu/Enter knob clockwise to select Settings then Go To Default.
2. Press Menu/Enter knob to restore default settings. Choose NO to maintain present setting with no change.

NOTE: Default display color is green.






Operation

Base Station Operation (From 120V AC House Current)

To operate the transceiver from home or office you will need a **13.8 volt DC Power Pack** rated at a minimum of **2 amps**, and a properly installed base station antenna.

WARNING: Do not attempt to operate this transceiver by connecting it directly to 120VAC.

1. Simply connect the **red (+)** and **black (-)** leads of the transceiver to the corresponding terminals of the power pack.
2. **Plug the power cable** into the back of the unit marked "Power". **Be sure to observe polarity markings.**
3. Connect a properly installed and matched base station antenna.

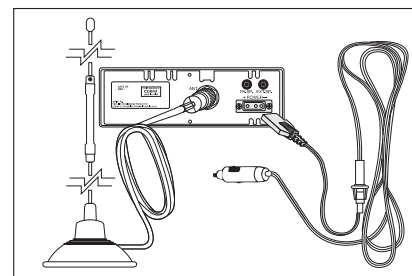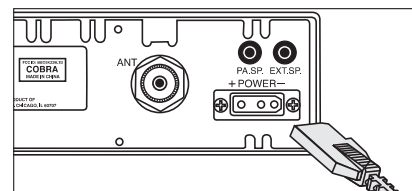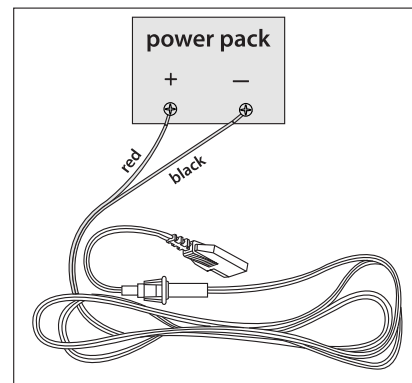

Temporary Mobile Operation

For temporary mobile operation, you can purchase an optional 12V power adapter and a magnetic mount antenna to allow you to quickly "install" your transceiver for temporary use.

To purchase accessories for mobile operation, visit Cobra at cobra.com. Have questions? Call Customer Service at 800-543-1608.

Cobra offers mobile operation solutions that can be purchased online. Please visit www.cobra.com, or if you'd like to speak with an expert, please call 800-543-1608 and our Customer Care Group can assist.



How Your CB Can Serve You

Your CB Radio Can:

- Warn of traffic problems
- Provide weather and road data
- Provide help in event of an emergency
- Provide direct contact with home or office
- Assist police by reporting erratic drivers
- Get “local information” to find destination
- Communicate with family and friends
- Suggest spots to eat and sleep
- Keep you alert while traveling

A Few Rules You Should Know:

- Conversations cannot last more than 5 minutes with another station. A one minute break is required to let others use the channel.
- You cannot blast others off the air by use of illegally amplified transmitters or illegally high antennas.
- You cannot use CB to promote illegal activities.
- Profanity is not allowed.
- You may not transmit music with a CB.
- Selling of merchandise and/or services is prohibited.

Set Channel 9 For Emergencies

Be sure antenna is properly connected.

CB Distress Data

When transmitting an emergency, you should request a “REACT BASE” and provide the CB distress data (called **CLIP**):

- C all Sign Identify yourself.
- L ocation Be exact.
- I njuries Number. Type. Trapped?
- P roblem Give details and help needed.

Transmit **CLIP** repeatedly so any monitor can assist.

NOTE: If no response on channel 9, try channels 19 or 14.



How Your CB Can Serve You

The FCC gives these examples of permitted and prohibited messages for channel 9. These are only guidelines and not all-inclusive:

Permitted	Example Message
Yes	“Tornado sighted six miles north of town.”
No “	Post number 10. No tornado sighted.”
Yes “	Out of gas on I-95 at mile marker 211.”
No “	Out of gas in my driveway.”
Yes	“Four car accident on I-94 at Exit 11. Send police and ambulance.”
No	“Traffic moving smoothly on I-94.”
Yes “	Weather Bureau has issued thunderstorm warning. Bring sailboat into port.”
No “	Attention motorists. Weather Bureau advises snow tomorrow will accumulate 4 to 6 inches.”
Yes	“Fire in building at 539 Main, Evanston.”
No	“Halloween patrol number 3. All quiet.”



CB 10-Codes

Citizen Bands have adopted the “10-CODES” for standard questions and answers. These codes provide quick and easy communication, especially in noisy areas. The following are some of the more common codes and meanings:

Code	Meaning	Code	Meaning
10-1	Receiving poorly	10-34	Trouble at this station
10-2	Receiving well	10-35	Confidential information
10-3	Stop transmitting	10-36	Correct time is
10-4	OK, message received	10-37	Wrecker needed at
10-5	Relay message	10-38	Ambulance needed
10-6	Busy, stand by	10-39	Message delivered
10-7	Out of service, leaving	10-41	Turn to channel
10-8	In service, subject to call	10-42	Traffic accident at
10-9	Repeat message	10-43	Traffic tie up at
10-10	Transmission completed standing by	10-44	Have a message for
10-11	Talking too rapidly	10-45	All units within range please report
10-12	Visitors present	10-50	Break channel
10-13	Advise weather/roads	10-60	What is next message number?
10-16	Make pick up at	10-62	Unable to copy, Use phone
10-17	Urgent business	10-63	Net directed to
10-18	Anything for us?	10-64	Net clear
10-19	Return to base	10-65	Awaiting your next message/assignment
10-20	My location is	10-67	All units comply
10-21	Call by phone	10-70	Fire at
10-22	Report in person to	10-71	Proceed, transmission in sequence
10-23	Stand by	10-77	Negative contact
10-24	Completed last assignment	10-81	Reserve hotel room for
10-25	Can you contact	10-82	Reserve room for
10-26	Disregard last info	10-85	My address is
10-27	Moving to channel	10-91	Talk closer to mic
10-28	Identify your station	10-93	Check my frequency on this channel
10-29	Time is up for contact	10-94	Give me a long count
10-30	Does not conform to FCC rules	10-99	Mission completed, all units secure
10-33	Emergency traffic	10-200	Police needed at



Frequency Ranges

The Cobra 29 LX transceiver represents some of the most advanced AM/FM two-way radios used as a Class D station in the Citizens Band Radio Service. These units feature advanced Phase Lock Loop (PLL) circuitry providing complete coverage of all 40 CB channels.

CB Channel	Channel Freq. In MHz	CB Channel	Channel Freq. In MHz
1	26.965	21	27.215
2	26.975	22	27.225
3	26.985	23	27.255
4	27.005	24	27.235
5	27.015	25	27.245
6	27.025	26	27.265
7	27.035	27	27.275
8	27.055	28	27.285
9	27.065	29	27.295
10	27.075	30	27.305
11	27.085	31	27.315
12	27.105	32	27.325
13	27.115	33	27.335
14	27.125	34	27.345
15	27.135	35	27.355
16	27.155	36	27.365
17	27.165	37	27.375
18	27.175	38	27.385
19	27.185	39	27.395
20	27.205	40	27.405



29 LX Specifications



Limited 2-Year Warranty

GENERAL

CHANNELS.....	CB - 40 CH
FREQUENCY RANGE	CB - 26,965 TO 27,405 MHZ WX - 162,400 TO 162,775 MHZ
FREQUENCY TOLERANCE	0.005 %
FREQUENCY CONTROL	PLL (PHASE LOCK LOOP) SYNTHESIZER
OPERATING TEMPERATURE	
RANGE.....	-30° C TO + 50° C
MICROPHONE	Plug-in dynamic
INPUT VOLTAGE	13.8VDC nom. (positive or negative ground)
Current Drain.....	Transmit: AM full mod., 1.5A (maximum) Receive: Squelched, 0.3A; full audio output, 1.2A (nominal)
Size	8-5/8" D x 7-9/32" W x 2-13/63" H
Weight.....	4 lbs.
Antenna Connector	UHF; SO-239 Meter Indicates relative power output received signal strength, and vswr

TRANSMITTER

Power Output.....	4 watts
Modulation	AM (Amplitude Modulation)
Frequency Response.....	300 to 3000 Hz
Output Impedance	50 ohms, unbalanced

RECEIVER

Sensitivity	AM Sensitivity Less than 1uV for 10 dB (S+N)/N FM Sensitivity -116 dBm @ 12 dB SINAD typical
Selectivity.....	6 dB @ 7 KHz, 60 dB @ 10KHz
Image Rejection.....	80 dB, typical
Adjacent-Channel Rejection.....	60 dB, typical
IF Frequencies	Double Conversion: 1st: 10.695 MHz 2nd: 455 KHz
Automatic Gain Control (AGC)	Less than 10 dB change in audio output for inputs from 10 to 50,000 microvolts
RF Gain range.....	40 db
Noise Blanker	RF type
Squelch	Adjustable; threshold less than 1µV
Audio Output Power	4 watts
Frequency Response.....	300 to 3000 Hz
Distortion.....	Less than 7% @3 watts @ 1000 Hz
Built-in Speaker.....	.8 ohms, 5w
External Speaker (Not supplied).....	.8 ohms; disables internal speaker when connected

PA SYSTEM

Power Output.....	4 watts into external speaker
External Speaker for PA.....	.8 ohms 4 Watts min. (Not Supplied).....the PA speaker also monitors the receiver; separate jack provided
Maximum antenna gain	0dbi

(SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)

Warranty Terms:

Cobra warrants your product against all defects in materials and workmanship for a period of two (2) years from the date of original purchase.

Cobra, at our sole discretion, will repair or replace your product (with the same or comparable product) free of charge.

Cobra will not pay shipping charges that you incur for sending your product to us. Products received COD will be refused.

To make a warranty claim, we will require proof of purchase in the form of an invoice or receipt. No proof of purchase is required for factory direct purchases.

Warranty Exclusions: Warranty does not apply to your product under any of the following conditions: 1. The serial number has been removed or modified. 2. Your product has been subjected to misuse or damage (including water damage, physical abuse, and/or improper installation). 3. Your product has been modified in any way. 4. Your receipt or proof-of-purchase is from a non-authorized dealer or internet auction site including E-bay, U-bid, or other nonauthorized resellers.

LIMITATION OF WARRANTY: EXCEPT AS EXPRESSLY PROVIDED HEREIN, YOU ARE ACQUIRING THE PRODUCT "AS IS" AND "WHERE IS", WITHOUT REPRESENTATION OR WARRANTY. COBRA SPECIFICALLY DISCLAIMS ANY REPRESENTATION OR WARRANTY INCLUDING, BUT NOT LIMITED TO THOSE CONCERNING THE MERCHANTABILITY AND SUITABILITY OF THE PRODUCT FOR A PARTICULAR PURPOSE. COBRA SHALL NOT BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGES INCLUDING, WITHOUT LIMITATION, DAMAGES ARISING OUT OF THE USE, MISUSE OR MOUNTING OF THE PRODUCT.

The above limitations or exclusions shall be limited to the extent they violate the laws of any particular state. Cobra is not responsible for products lost in shipment between the owner and our service center.

General Warranty Information

Each product we manufacture is covered by our factory warranty. While each product may have unique components and policy, the general guideline below will apply to most Cobra products.

All Cobra products purchased factory-direct or from our Authorized Resellers will come with a full one to three (1-3) year warranty from the date of the original retail purchase (see policy statement above for full warranty details and exclusions).

Standard accessories packaged with each model will have a one-year factory warranty.

Accessory items have a one-year factory warranty.

Shipping to our facility is not covered in our warranty. Return shipping is included within the US. This warranty is non-transferrable.

For the sake of clarity, 'repair or replace the Product or its defective part' does not include removal or installation work, costs or expenses which include but are not limited to labor costs or expenses. Cobra will not be responsible for lost packages.