

**HYAK LABORATORIES, INC.**

7011 CALAMO STREET, SUITE 107  
SPRINGFIELD, VIRGINIA 22150  
(703) 451-1188  
FAX (703) 644-7492

**ENGINEERING STATEMENT**

**For Type Certification of**


**COBRA ELECTRONICS CORPORATION**

**Model No: FRS 100  
FCC ID: BBOFRS100**

I am an Electronics Engineer, a principal in the firm of Hyak Laboratories, Inc., Springfield, Virginia. My education and experience are a matter of record with the Federal Communications Commission.

Hyak Laboratories, Inc. has been authorized by Cobra Electronics to make type certification measurements on the FRS 100 transceiver. These tests made by me or under my supervision in our Springfield laboratory.

Test data and documentation required by the FCC for Type Certification are included in this report. The data verifies that the above mentioned transceiver meets FCC requirements and Type Certification is requested.



---

Rowland S. Johnson

Dated: April 18, 1998

## A. INTRODUCTION

The following data are submitted in connection with this request for type certification of the FRS 100 transceiver in accordance with Part 2, Subpart J of the FCC Rules.

The FRS 100 is a portable, battery operated, UHF, frequency modulated transceiver intended for 12.5 kHz channel family radio service applications in the 462.5625-462.5625 MHz band. It operates from a nominal 6.0 Vdc battery supply. Output power rating is 0.3 watts ERP.

B. GENERAL INFORMATION REQUIRED FOR TYPE ACCEPTANCE  
(Paragraph 2.983 of the Rules)

1. Name of applicant: Cobra Electronics Corporation
2. Identification of equipment: FCC ID: BBOFRS100
  - a. The equipment identification label is shown in Appendix 1.
  - b. Photographs of the equipment are included in Appendix 2.
3. Quantity production is planned.
4. Technical description:
  - a. 11k0F3E emission
  - b. Frequency range: 462.5625 - 462.5875 MHz.
  - c. Operating power of transmitter is fixed at the factory at less than 0.5 W ERP.
  - d. Maximum power permitted is 0.5 watts, and the FRS 100 fully complied with that power limitation.
  - e. The dc voltage and dc currents at final amplifier:  
  
Collector voltage: 5.8 Vdc  
Collector current: 0.16 A
  - f. Function of each active semiconductor device:  
See Appendix 3.
  - g. Complete circuit diagram is included in Appendix 4.
  - h. A draft instruction book is submitted as Appendix 5.
  - i. The transmitter tune-up procedure is included in Appendix 6.
  - j. A description of circuits for stabilizing frequency is included in Appendix 7.
  - k. A description of circuits and devices employed for suppression of spurious radiation and for limiting modulation is included in Appendix 8.
  - l. Not applicable.
5. Data for 2.985 through 2.997 follow this section.

C. RF Power Output (Paragraph 2.985(a) of the Rules)

The FRS 100 has a permanently attached built-in antenna without provisions for a coaxial connector.

Therefore RF power output was calculated, see Table 1. (The transmitter was tuned by the factory according to the procedure of Exhibit 4.)

TABLE 1

Operating Freq., MHz	Power watts into a dipole antenna
462.5875	0.293

## D. MODULATION CHARACTERISTICS


1. A curve showing frequency response of the transmitter is shown in Figure 1. Reference level was audio signal output from a Boonton 8220 modulation meter with one kHz deviation. Audio output was measured with a Audio Precision System One integrated test system.
2. Modulation limiting curves are shown in Figure 2, using a Boonton 8220 modulation meter. Signal level was established with a Audio Precision System One integrated test system. The curves show compliance with paragraphs 2.987(b).
3. Figure 3 is a graph of the post-limiter low pass filter which provides a roll-off of  $60\text{Log}f/3$  dB where  $f$  is audio frequency in kHz. Measurements were made following EIA RS-152B with an Audio Precision System One integrated test system on the Boonton 8220 modulation meter audio output.
4. Occupied Bandwidth  
(Paragraphs 2.989(c) of the Rules)

Figure 4 is a plot of the sideband envelope of the transmitter output taken with a Tektronix 494P spectrum analyzer. Modulation corresponded to conditions of 2.989(c)(1) and consisted of 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50% modulation at 2672 Hz, the frequency of maximum response. Measured modulation under these conditions was 2.2 kHz.

Emission designator:

$$(2M + 2D) (2 \times 3 \text{ kHz}) + (2 \times 2.5 \text{ kHz}) = 11k0F3E$$


FIGURE 1  
MODULATION FREQUENCY RESPONSE

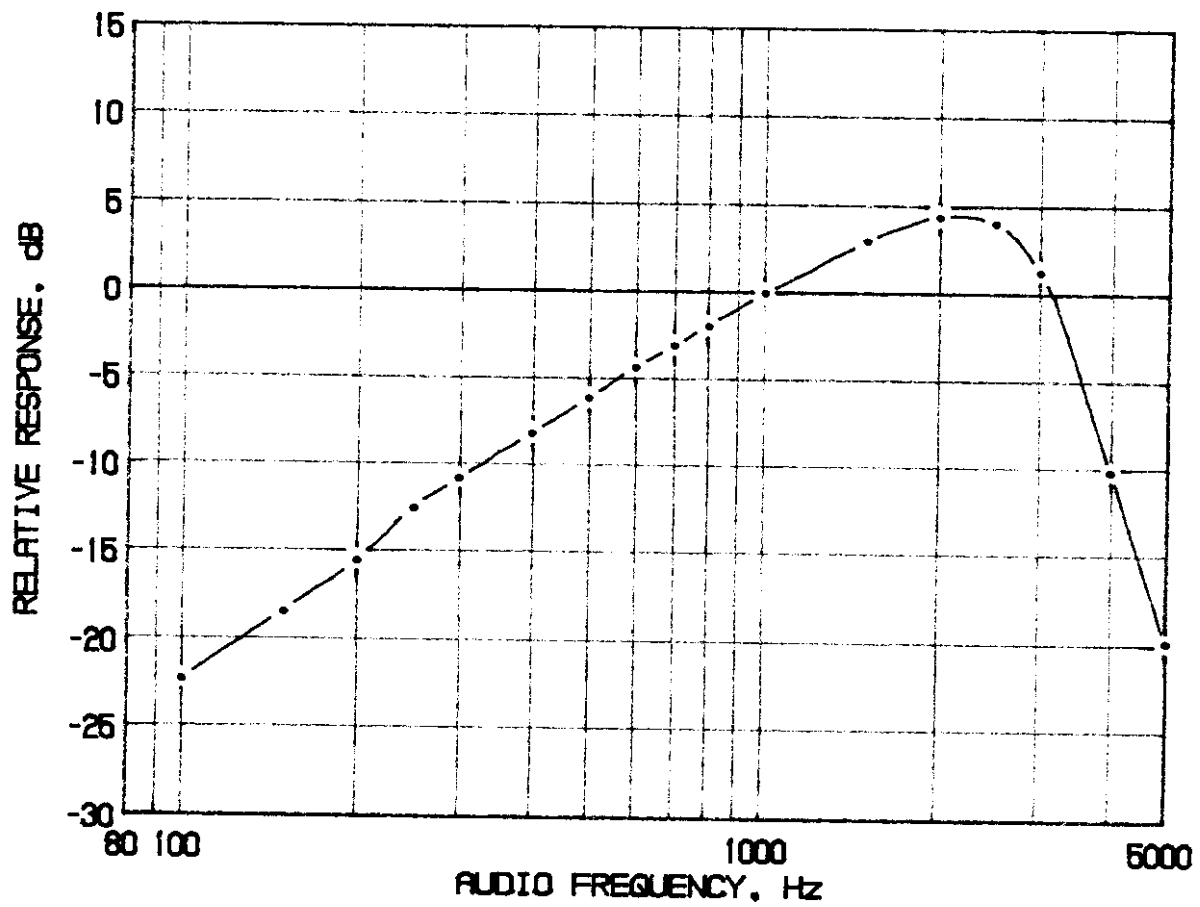

MODULATION FREQUENCY RESPONSE  
FCC ID: BBOFRS100

FIGURE 1


FIGURE 2  
AUDIO LIMITER CHARACTERISTICS

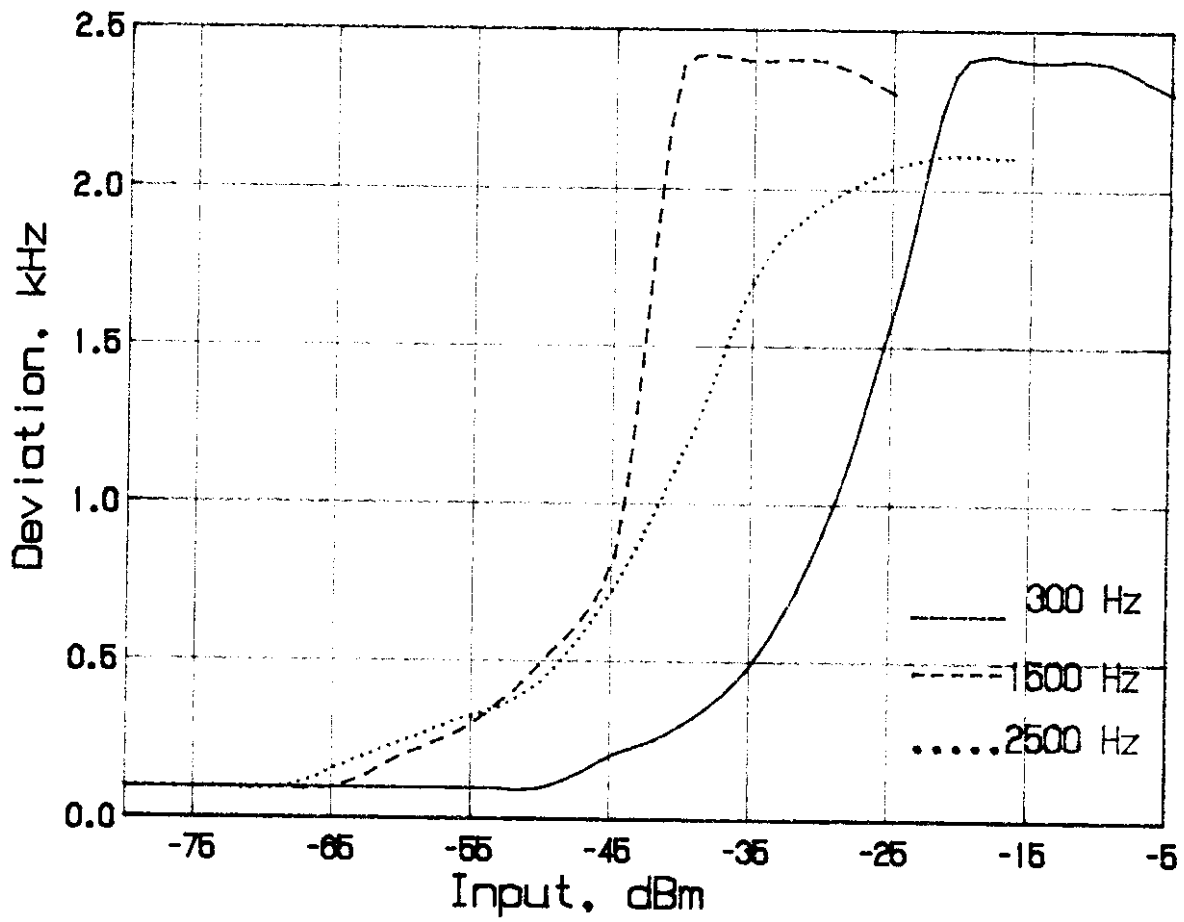

AUDIO LIMITER CHARACTERISTICS  
FCC ID: BBOFRS100

FIGURE 2

FIGURE 3  
AUDIO LOW PASS FILTER RESPONSE

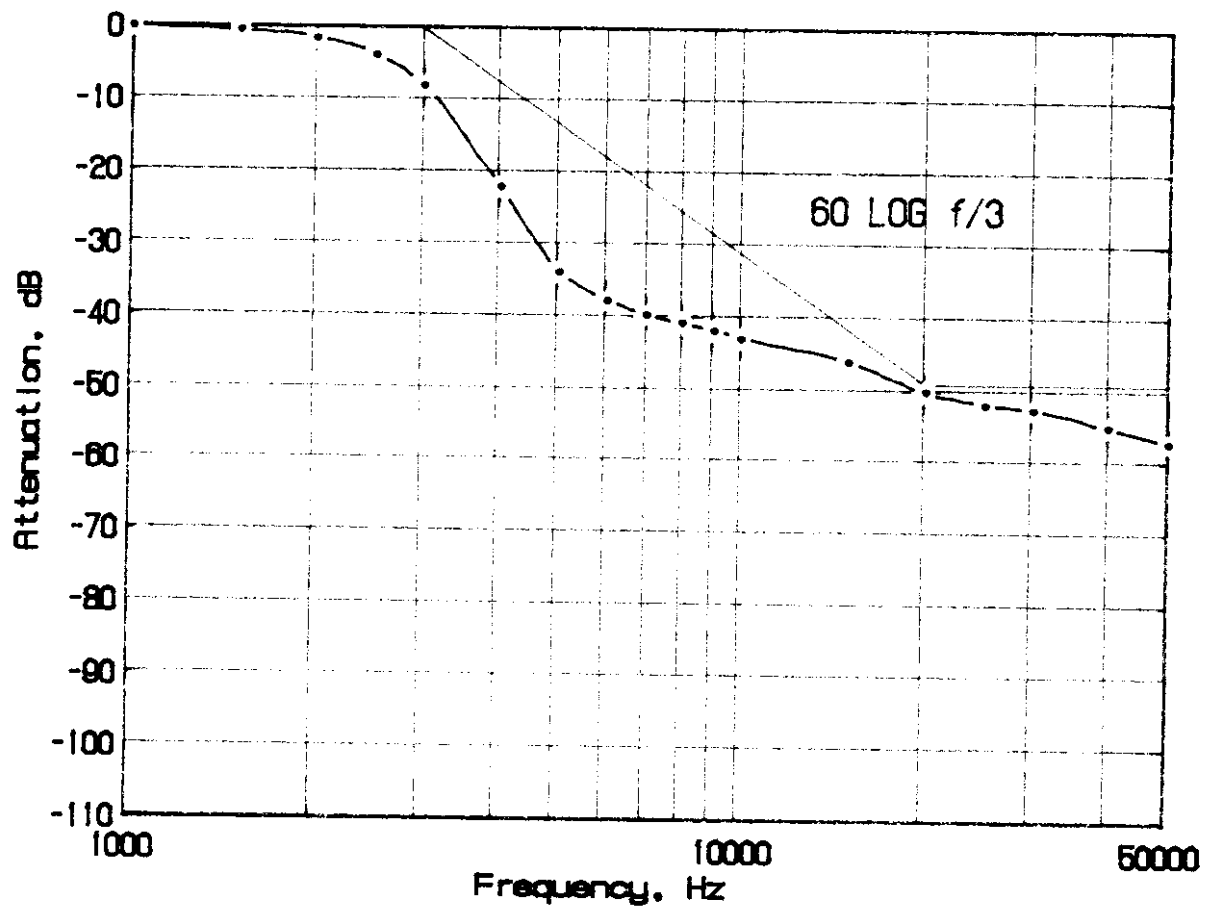

AUDIO LOW PASS FILTER  
RESPONSE  
FCC ID: BBOFRS100

FIGURE 3

FIGURE 4

D. MODULATION CHARACTERISTICS (Continued)

The plots are within FCC limits. The horizontal scale (frequency) is 10 kHz per division and the vertical scale (amplitude) is a logarithmic presentation equal to 10 dB per division.

E. SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS  
(Paragraph 2.991 of the Rules)

The FRS 100 has a permanently attached antenna. There is no connector for an external antenna. Therefore, no antenna terminal conducted measurements were made.

F. DESCRIPTION OF RADIATED SPURIOUS MEASUREMENT FACILITIES

A description of the Hyak Laboratories' radiation test facility is a matter of record with the FCC. The facility was accepted for radiation measurements from 25 to 1000 MHz on October 1, 1976 and is currently listed as an accepted site.

G. FIELD STRENGTH MEASUREMENTS OF SPURIOUS RADIATION

Field intensity measurements of radiated spurious emissions from the Maxon FRS-214 were made with a Tektronix 494P spectrum analyzer using Singer DM-105 for the measurements to 1 GHz, and EMCO 3115 horn to 4.8 GHz.

The transmitter was located in an open field 3 meters from the test antenna. Supply voltage was a power supply with a terminal voltage under load of 6.0 Vdc.

The transmitter and test antennae were arranged to maximize pickup. Both vertical and horizontal test antenna polarization were employed.

The measurement system was capable of detecting signals 100 dB or more below the reference level. Measurements were made from the lowest frequency generated within the unit (12 MHz), to 10 times operating frequency. Data after application of antenna factors and line loss corrections are shown in Table 3.



TABLE 3  
TRANSMITTER CABINET RADIATED SPURIOUS  
462.5625 MHz, 6.0 Vdc, 0.293 watts

<u>Spurious Frequency MHz</u>	<u>Radiated Field uV/m @ 3M</u>	<u>dB Below Carrier Reference<sup>1</sup></u>
462.563	1266193.3	0.0V
925.126	5908.8	46.6V
1387.689	2030.0	55.9V
1850.252	1644.4	57.7V
2312.814	1907.7	56.4V
2775.377	355.2	71.0H*
3237.940	142.1	79.0V*
3700.503	91.6	82.8H*
4163.066	402.7	70.0H*
4625.629	260.0	73.8H*

Required:  $43+10 \log(P) = 38$

<sup>1</sup>Worst-case polarization, H-Horizontal, V-Vertical.

\*Reference data only, more than 20 dB below FCC limit.

All other spurious from 12 MHz to the tenth harmonic were 20 dB or more below FCC limit.

H. FREQUENCY STABILITY  
(Paragraph 2.995(a)(2))

Measurement of frequency stability versus temperature was made at temperatures from  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ . At each temperature, the unit was exposed to test chamber ambient a minimum of 60 minutes after indicated chamber temperature ambient had stabilized to within  $\pm 2^{\circ}$  of the desired test temperature. Following the 1 hour soak at each temperature, the unit was turned on, keyed and frequency measured within 2 minutes. Test temperature was sequenced in the order shown in Table 4, starting with  $-20^{\circ}\text{C}$ .

A Thermotron S1.2 temperature chamber was used. Temperature was monitored with a Keithley 871 digital thermometer. The transmitter output stage was terminated in a dummy load. Primary supply was 6.0 volts. Frequency was measured with a HP 5385A frequency counter connected to the transmitter through a power attenuator. Measurements were made at 462.5625 MHz. No transient keying effects were observed.

TABLE 4

## FREQUENCY STABILITY AS A FUNCTION OF TEMPERATURE

462.5625 MHz, 6.0 Vdc, 0.293W

Temperature, $^{\circ}\text{C}$	Output Frequency, MHz	p.p.m.
-19.9	462.587510	0.0
- 9.9	462.587409	-0.2
- 0.3	462.587460	-0.1
10.1	462.587815	0.7
20.2	462.587690	0.4
29.8	462.587302	-0.4
39.6	462.587038	-1.0
50.1	462.587225	-0.6
Maximum frequency error:	462.587500	
	<u>462.587038</u>	
	- .000462 MHz	

FCC Rule 95.627(b) specifies .00025% (2.5 p.p.m.) or a maximum of  $\pm 0.001156$  MHz, which corresponds to:

High Limit	462.588656 MHz
Low Limit	462.586344 MHz

I. FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE  
(Paragraph 2.995(d)(2) of the Rules)

Oscillator frequency as a function of power supply voltage was measured with a HP 5385A frequency counter as supply voltage provided by an HP 6264B variable dc power supply was varied from  $\pm 15\%$  above the nominal 6.0 volt rating to below the battery end point. A Fluke 197 digital voltmeter was used to measure supply voltage at transmitter primary input terminals. Measurements were made at 20°C ambient.

TABLE 5

## FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE

462.5625 MHz, 6.0 Vdc Nominal; 0.293W

<u>Supply Voltage</u>		<u>Output Frequency, MHz</u>	<u>p.p.m.</u>
6.9	115%	462.587696	0.4
6.6	110%	462.587685	0.4
6.3	105%	462.587686	0.4
6.0	100%	462.587690	0.4
5.7	95%	462.587694	0.4
5.4	90%	462.587701	0.4
5.1	85%	462.587706	0.4
4.9*	80%	462.587711	0.5
Maximum frequency error:		462.587706	
		<u>462.587500</u>	
		+ .000206 MHz	

FCC Rule 95.627(b) specifies .00025% (2.5 p.p.m) or a maximum of  $\pm 0.001156$  MHz, corresponding to:

High Limit	462.588656 MHz
Low Limit	462.586344 MHz

\*Battery end point.

APPENDIX 1  
EQUIPMENT IDENTIFICATION LABEL

PHOTOGRAPH OF LABEL PLACEMENT FOLLOWS THIS SHEET

EQUIPMENT IDENTIFICATION LABEL  
FCC ID: BBOFRS100

APPENDIX 1