


SPECIFICATION FOR APPROVAL


1.MECHANICAL DIMENSION (UNIT:mm)

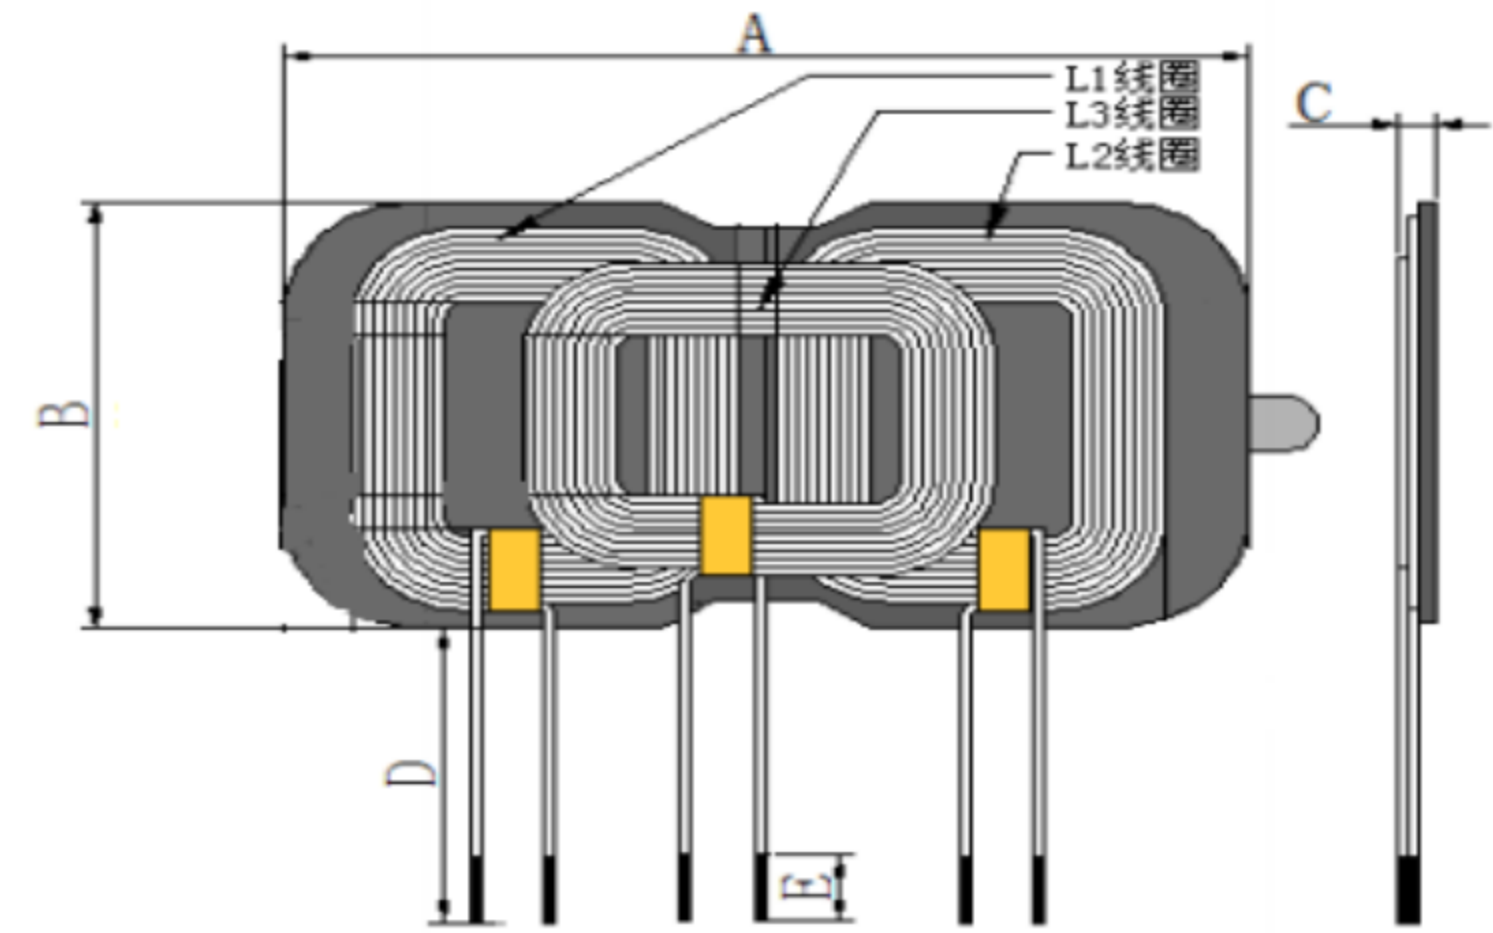

113kHz-205kHz

A	B	C	D	E
93±1.0	52±1.0	4.8Max	160±5	4±2

2. SCHEMATICS:

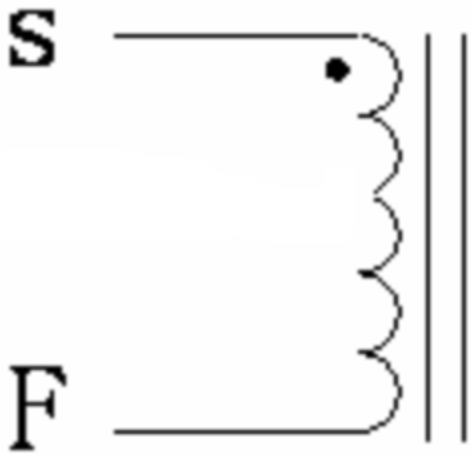

1.Coil attached disk, disk size

93*52mm two sorts

.Coil outlet position wrap tape paper
1-2Ts;

3. The bottom of the magnetic
separator should be affixed with back
glue

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Ø 0.08*105mm2UEW-F	9TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L1	L2	L3		HI-POT
TEST	Coil and diskette	Coil and diskette	Coil and diskette		
CON	100KHz, 0.25V	100KHz, 0.25V	100KHz, 0.25V		
SPEC	6.8uH±10%	6.8uH±10%	6.3uH±10%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Acrylic copper silk-covered wire	0.08*105股	SHENZHEN JINMA NEW MATERIALS TECHNOLOGY CO LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	magnetic sheet	G46.5*52*2pManganese zinc hard disk	TAYI CO.,LTD	
4	glue	9999	DONGGUANSHIGUOXISHIYE YOXIANGONGS	
5	high-temperature adhesive tape	8mmWide high temperature adhesive paper	CUDAK CO.,LTD	
6				

HRSW ELECTRONICS CO.,LTD

PART NO

TITLE

A6 Three-coil lead 160mm

DRAWN BY

CHECKED BY

APPROVED BY

Weihua He

Lihong Wei

Lihong Wei