

Inter|Lab®

FCC Measurement/Technical Report on

OTE070 & OTE071

Jabra Elite 65t

FCC ID: BCE-OTE070 & BCE-OTE071
IC ID: 2386C-OTE070 & 2386C-OTE071

Report Reference: MDE_GNAUD_1707_FCCd

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company
www.7layers.com

Table of Contents

0	Summary	3
0.1	Technical Report Summary	3
0.2	Measurement Summary / signatures	4
0.3	Administrative Data	5
0.4	Testing Laboratory	5
0.5	Project Data	5
0.6	Applicant Data	5
0.7	Manufacturer Data	5
1	Test object Data	6
1.1	General EUT Description	6
1.2	EUT Main components	7
1.3	Ancillary Equipment	7
1.4	Auxiliary Equipment	7
1.5	EUT Setups	7
1.6	Operating Modes	8
1.7	Special software used for testing	8
1.8	Product labelling	8
2	Test Results	9
2.1	Spurious radiated emissions	9
2.2	Peak power output	13
3	Measurement uncertainty	14
4	Test equipment	14
5	Antenna Factors, Cable Loss and Sample Calculations	16
5.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	16
5.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	17
5.3	Antenna R&S HL562 (30 MHz – 1 GHz)	18
5.4	Antenna R&S HF907 (1 GHz – 18 GHz)	19
5.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	20
5.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	21
6	Photo Report	21
7	Setup Drawings	21
8	FCC and IC Correlation of measurement requirements	23
9	Annex measurement plots	24
9.1	Radiated emissions and peak output power	24

0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an intentional radiator:
10.6 MHz Near Field Magnetic Induction (NFMI) radio

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

- § 15.205 Restricted bands of operation
- § 15.207 Conducted limits
- § 15.209 Radiated emission limits; general requirements
- § 15.215 Additional provisions to the general radiated emission limitations

Note:
ANSI C63.10-2013 applied

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.

0.2 Measurement Summary / signatures

47 CFR Chapter I FCC Part 15, Subpart C §15.209

Radiated Emissions

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_01	Enclosure	passed

47 CFR Chapter I FCC Part 15, Subpart C §15.209

Peak Output Power

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_01	Enclosure	passed

Notes:

N/A = Not applicable



(responsible for accreditation scope)
Dipl.-Ing. Marco Kullik



(responsible for testing and report)
Dipl.-Ing. Daniel Gall



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

0.3 Administrative Data

0.4 Testing Laboratory

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

This facility has been fully described in a report submitted to the IC and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAkKS D-PL-12140-01-00

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik

Report Template Version: 2016-08-19

0.5 Project Data

Responsible for testing and report: Dipl.-Ing. Daniel Gall

Employees who performed the tests: documented internally at 7Layers

Date of Report: 2017-11-29

Testing Period: 2017-10-28 to 2017-11-08

0.6 Applicant Data

Company Name: GN Audio A/S
Address: Lautrupbjerg 7
DK-2750 Ballerup
Denmark

Contact Person:

0.7 Manufacturer Data

Company Name: Please see applicant data

Address:

Contact Person:

1 Test object Data

1.1 General EUT Description

Equipment under Test Jabra Elite 65t OTE070 & OTE071
Type Designation: OTE070 & OTE071
Kind of Device: 10.6 MHz RF Transceiver
Voltage Type: DC
Voltage level: 3.7 V

General product description:

The EUT is a wireless headset with an ear to ear link between the left and right side earbud. The headset has a Bluetooth & Bluetooth low energy transceiver in the right earbud and a magnetic induction transceiver in both left and right earbud.

The EUT provides the following ports:

Port and interconnecting cables	Cable length	Shielded
-	-	-

The main components of the EUT are listed and described in Chapter 2.

1.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: DE1230005 ae01)	Jabra Elite 65t	OTE070	N/A	28-04992	1.0	-
Remarks: EUT A is equipped with an integral antenna.						
EUT B (Code: DE1230005 ae01)	Jabra Elite 65t	OTE071	N/A	28-05016	1.0	-
Remarks: EUT B is equipped with an integral antenna.						

NOTE: The short description is used to simplify the identification of the EUT in this test report.

1.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	FCC ID
-	-	-	-	-	-	-

1.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
-	-	-	-	-	-	-

1.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup No.	Combination of EUTs	Description and Rationale
Setup_01	EUT A and EUT B	

1.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
Op-mode 1	continuous modulation	EUT is transmitting continuously modulated signal

1.7 Special software used for testing

None

1.8 Product labelling

1.8.1. FCC ID label

Please refer to the documentation of the applicant.

1.8.2. Location of the label on the EUT

Please refer to the documentation of the applicant.

2 Test Results

2.1 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

2.1.1. Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz

- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^{\circ}$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated this contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

2.1.2. Test Requirements / Limits

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits ($\text{dB}\mu\text{V}/\text{m}$)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits ($\text{dB}\mu\text{V}/\text{m}$)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V}/\text{m)} = 20 \log (\text{Limit } (\mu\text{V}/\text{m})/1\mu\text{V}/\text{m})$

2.1.3. Test Protocol

Temperature: 24 °C
Air Pressure: 1012 hPa
Humidity: 40 %

2.1.3.1. Measurement up to 30 MHz

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
-	-	-	-	-	-	-	-	-	-

Remark: No relevant spurious emissions in the range 20 dB below the limit found, therefore step 2 was not performed.
Please see annex for the measurement plots.

2.1.3.2. Measurement above 30 MHz

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
-	-	-	-	-	-	-	-	-	-

Remarks: No relevant spurious emissions in the range 20 dB below the limit found, therefore step 2 was not performed.
Please see annex for the measurement plots.

2.1.4. Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed

2.2 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

3.2.1 Test Description

Please refer to sub-clause 2.1.1.

3.2.2 Test Limits

Please refer to sub-clause 2.1.2.

3.2.3 Test Protocol

Temperature: 24 °C
 Air Pressure: 1012 hPa
 Humidity: 40 %

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure

Output power dB μ V/m	Frequency MHz	Limit dB μ V/m at fundamental frequency for 10 m distance	Remarks
<-8.86	10.6	-	Maximum radiated field strength at fundamental frequency

Note: The EUT transmitted a continuously modulated signal.

Remark: Please see annex for the measurement plots.

Comment:

The Peak power output is not measurable in a distance of 3m, because the output power level is below the noise level of the testsystem, therefore no measurement value is reported.

3.2.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed

3 Measurement uncertainty

Test Case	Parameter	Uncertainty
Peak power output	Power	± 4.5 dB
Occupied bandwidth	Power Frequency:	± 4.5 dB ± 0.125 kHz
Spurious radiated emissions	Power Frequency:	± 4.5 dB ± 11.2 kHz

4 Test equipment

1 Radiated Emissions

Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Calibration Due
1.1	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	
1.2	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/11920513	
1.3	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2018-11-29
1.4	Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	Frankonia	none	2019-05-02
1.5	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2017-12-09
1.6	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/3790709	
1.7	AS 620 P	Antenna mast	HD GmbH	620/37	
1.8	NRV-Z1	Sensor Head A	Rohde & Schwarz	827753/005	
1.9	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785	
1.10	HL 562	Ultralog new biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2018-06-30
1.11	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2019-03-29
1.12	HFH2-Z2	Loop Antenna	Rohde & Schwarz GmbH & Co. KG	829324/006	2017-11-27
1.13	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2018-12-02
1.14	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2019-04-09
1.15	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304	
1.16	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675	
1.17	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz GmbH & Co. KG	100609	2019-04-19
1.18	HF 907	Double-ridged horn	Rohde & Schwarz GmbH & Co. KG	102444	2018-05-11
1.19	DE 325	Dreheinheit	HD GmbH		

2 Radio lab

Lab to perform frequency bandwidth measurements

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Calibration Due
2.1	FSV30	Signal Analyzer	Rohde & Schwarz	103005	2018-02-24
2.2	Weinschel 56-10	10 dB attenuator	Weinschel	W3711	-
2.3	Weinschel 4T-10	10 dB attenuator	Weinschel	F9401	-
2.4	WA1515	6 dB coupler	Weinschel	A855	-
2.5	5-4 Rev.0	20 dB coupler	-	07-00	-
2.6	ST18/SMAM/SMAM/36	Coaxial cable (RLC-1)	-	Batch No. 12424	-
2.7	ST18/SMAM/SMAM/36	Coaxial cable (RLC-2)	-	Batch No. 625905	-
2.8	ST18/SMAM/Nm/48	Coaxial cable (RL-RX spuri cable)	-	Batch No. 625626	-
2.9	7006-1	DC blocker	Weinschel	W0026	-
2.10	NGSM 32/10	DC power supply	Rohde & Schwarz	2725	2019-06-22
2.11	OPUS 10	Thermo-Hydrometer	Lufft	12482	2019-03-29
2.12	177	Digital Voltmeter	Fluke	86670383	2018-02-03
2.13	VT4002	Temperature Chamber	Vötsch	585660021 50010	2018-03-08

5 Antenna Factors, Cable Loss and Sample Calculations

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

5.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz)

Frequency MHz	Corr. dB	LISN insertion loss ESH3- Z5 dB	cable loss (incl. 10 dB atten- uator) dB
0,15	10,1	0,1	10,0
5	10,3	0,1	10,2
7	10,5	0,2	10,3
10	10,5	0,2	10,3
12	10,7	0,3	10,4
14	10,7	0,3	10,4
16	10,8	0,4	10,4
18	10,9	0,4	10,5
20	10,9	0,4	10,5
22	11,1	0,5	10,6
24	11,1	0,5	10,6
26	11,2	0,5	10,7
28	11,2	0,5	10,7
30	11,3	0,5	10,8

Sample calculation

$$U_{\text{LISN}} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

5.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)

Frequency MHz	AF HFH-Z2) dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-40 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
0,009	20,50	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,01	20,45	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,015	20,37	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,02	20,36	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,025	20,38	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,03	20,32	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,05	20,35	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,08	20,30	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,1	20,20	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,2	20,17	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,3	20,14	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,49	20,12	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,490001	20,12	-39,6	0,1	0,1	0,1	0,1	-40	30	3
0,5	20,11	-39,6	0,1	0,1	0,1	0,1	-40	30	3
0,8	20,10	-39,6	0,1	0,1	0,1	0,1	-40	30	3
1	20,09	-39,6	0,1	0,1	0,1	0,1	-40	30	3
2	20,08	-39,6	0,1	0,1	0,1	0,1	-40	30	3
3	20,06	-39,6	0,1	0,1	0,1	0,1	-40	30	3
4	20,05	-39,5	0,2	0,1	0,1	0,1	-40	30	3
5	20,05	-39,5	0,2	0,1	0,1	0,1	-40	30	3
6	20,02	-39,5	0,2	0,1	0,1	0,1	-40	30	3
8	19,95	-39,5	0,2	0,1	0,1	0,1	-40	30	3
10	19,83	-39,4	0,2	0,1	0,2	0,1	-40	30	3
12	19,71	-39,4	0,2	0,1	0,2	0,1	-40	30	3
14	19,54	-39,4	0,2	0,1	0,2	0,1	-40	30	3
16	19,53	-39,3	0,3	0,1	0,2	0,1	-40	30	3
18	19,50	-39,3	0,3	0,1	0,2	0,1	-40	30	3
20	19,57	-39,3	0,3	0,1	0,2	0,1	-40	30	3
22	19,61	-39,3	0,3	0,1	0,2	0,1	-40	30	3
24	19,61	-39,3	0,3	0,1	0,2	0,1	-40	30	3
26	19,54	-39,3	0,3	0,1	0,2	0,1	-40	30	3
28	19,46	-39,2	0,3	0,1	0,3	0,1	-40	30	3
30	19,73	-39,1	0,4	0,1	0,3	0,1	-40	30	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

5.3 Antenna R&S HL562 (30 MHz – 1 GHz)

($d_{Limit} = 3 \text{ m}$)

Frequency MHz	AF R&S HL562 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d_{Limit} (meas. distance (limit)) m	d_{used} (meas. distance (used)) m
30	18,6	0,6	0,29	0,04	0,23	0,02	0,0	3	3
50	6,0	0,9	0,39	0,09	0,32	0,08	0,0	3	3
100	9,7	1,2	0,56	0,14	0,47	0,08	0,0	3	3
150	7,9	1,6	0,73	0,20	0,59	0,12	0,0	3	3
200	7,6	1,9	0,84	0,21	0,70	0,11	0,0	3	3
250	9,5	2,1	0,98	0,24	0,80	0,13	0,0	3	3
300	11,0	2,3	1,04	0,26	0,89	0,15	0,0	3	3
350	12,4	2,6	1,18	0,31	0,96	0,13	0,0	3	3
400	13,6	2,9	1,28	0,35	1,03	0,19	0,0	3	3
450	14,7	3,1	1,39	0,38	1,11	0,22	0,0	3	3
500	15,6	3,2	1,44	0,39	1,20	0,19	0,0	3	3
550	16,3	3,5	1,55	0,46	1,24	0,23	0,0	3	3
600	17,2	3,5	1,59	0,43	1,29	0,23	0,0	3	3
650	18,1	3,6	1,67	0,34	1,35	0,22	0,0	3	3
700	18,5	3,6	1,67	0,42	1,41	0,15	0,0	3	3
750	19,1	4,1	1,87	0,54	1,46	0,25	0,0	3	3
800	19,6	4,1	1,90	0,46	1,51	0,25	0,0	3	3
850	20,1	4,4	1,99	0,60	1,56	0,27	0,0	3	3
900	20,8	4,7	2,14	0,60	1,63	0,29	0,0	3	3
950	21,1	4,8	2,22	0,60	1,66	0,33	0,0	3	3
1000	21,6	4,9	2,23	0,61	1,71	0,30	0,0	3	3

($d_{Limit} = 10 \text{ m}$)

30	18,6	-9,9	0,29	0,04	0,23	0,02	-10,5	10	3
50	6,0	-9,6	0,39	0,09	0,32	0,08	-10,5	10	3
100	9,7	-9,2	0,56	0,14	0,47	0,08	-10,5	10	3
150	7,9	-8,8	0,73	0,20	0,59	0,12	-10,5	10	3
200	7,6	-8,6	0,84	0,21	0,70	0,11	-10,5	10	3
250	9,5	-8,3	0,98	0,24	0,80	0,13	-10,5	10	3
300	11,0	-8,1	1,04	0,26	0,89	0,15	-10,5	10	3
350	12,4	-7,9	1,18	0,31	0,96	0,13	-10,5	10	3
400	13,6	-7,6	1,28	0,35	1,03	0,19	-10,5	10	3
450	14,7	-7,4	1,39	0,38	1,11	0,22	-10,5	10	3
500	15,6	-7,2	1,44	0,39	1,20	0,19	-10,5	10	3
550	16,3	-7,0	1,55	0,46	1,24	0,23	-10,5	10	3
600	17,2	-6,9	1,59	0,43	1,29	0,23	-10,5	10	3
650	18,1	-6,9	1,67	0,34	1,35	0,22	-10,5	10	3
700	18,5	-6,8	1,67	0,42	1,41	0,15	-10,5	10	3
750	19,1	-6,3	1,87	0,54	1,46	0,25	-10,5	10	3
800	19,6	-6,3	1,90	0,46	1,51	0,25	-10,5	10	3
850	20,1	-6,0	1,99	0,60	1,56	0,27	-10,5	10	3
900	20,8	-5,8	2,14	0,60	1,63	0,29	-10,5	10	3
950	21,1	-5,6	2,22	0,60	1,66	0,33	-10,5	10	3
1000	21,6	-5,6	2,23	0,61	1,71	0,30	-10,5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{Limit} / d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

5.4 Antenna R&S HF907 (1 GHz – 18 GHz)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24,4	-19,4
2000	28,5	-17,4
3000	31,0	-16,1
4000	33,1	-14,7
5000	34,4	-13,7
6000	34,7	-12,7
7000	35,6	-11,0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, attenuator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0,99	0,31	-21,51	0,79		
1,44	0,44	-20,63	1,38		
1,87	0,53	-19,85	1,33		
2,41	0,67	-19,13	1,31		
2,78	0,86	-18,71	1,40		
2,74	0,90	-17,83	1,47		
2,82	0,86	-16,19	1,46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31,0	-23,4
4000	33,1	-23,3
5000	34,4	-21,7
6000	34,7	-21,2
7000	35,6	-19,8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, attenuator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0,47	1,87	0,53	-27,58	1,33	
0,56	2,41	0,67	-28,23	1,31	
0,61	2,78	0,86	-27,35	1,40	
0,58	2,74	0,90	-26,89	1,47	
0,66	2,82	0,86	-25,58	1,46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35,6	-57,3
8000	36,3	-56,3
9000	37,1	-55,3
10000	37,5	-56,2
11000	37,5	-55,3
12000	37,6	-53,7
13000	38,2	-53,5
14000	39,9	-56,3
15000	40,9	-54,1
16000	41,3	-54,1
17000	42,8	-54,4
18000	44,2	-54,7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre-amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0,56	1,28	-62,72	2,66	0,94	1,46
0,69	0,71	-61,49	2,84	1,00	1,53
0,68	0,65	-60,80	3,06	1,09	1,60
0,70	0,54	-61,91	3,28	1,20	1,67
0,80	0,61	-61,40	3,43	1,27	1,70
0,84	0,42	-59,70	3,53	1,26	1,73
0,83	0,44	-59,81	3,75	1,32	1,83
0,91	0,53	-63,03	3,91	1,40	1,77
0,98	0,54	-61,05	4,02	1,44	1,83
1,23	0,49	-61,51	4,17	1,51	1,85
1,36	0,76	-62,36	4,34	1,53	2,00
1,70	0,53	-62,88	4,41	1,55	1,91

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

5.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)

Frequency MHz	AF EMCO 3160-09 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (pre- amp) dB	cable loss 3 (inside chamber) dB	cable loss 4 (switch unit) dB	cable loss 5 (to receiver) dB
18000	40,2	-23,5	0,72	-35,85	6,20	2,81	2,65
18500	40,2	-23,2	0,69	-35,71	6,46	2,76	2,59
19000	40,2	-22,0	0,76	-35,44	6,69	3,15	2,79
19500	40,3	-21,3	0,74	-35,07	7,04	3,11	2,91
20000	40,3	-20,3	0,72	-34,49	7,30	3,07	3,05
20500	40,3	-19,9	0,78	-34,46	7,48	3,12	3,15
21000	40,3	-19,1	0,87	-34,07	7,61	3,20	3,33
21500	40,3	-19,1	0,90	-33,96	7,47	3,28	3,19
22000	40,3	-18,7	0,89	-33,57	7,34	3,35	3,28
22500	40,4	-19,0	0,87	-33,66	7,06	3,75	2,94
23000	40,4	-19,5	0,88	-33,75	6,92	3,77	2,70
23500	40,4	-19,3	0,90	-33,35	6,99	3,52	2,66
24000	40,4	-19,8	0,88	-33,99	6,88	3,88	2,58
24500	40,4	-19,5	0,91	-33,89	7,01	3,93	2,51
25000	40,4	-19,3	0,88	-33,00	6,72	3,96	2,14
25500	40,5	-20,4	0,89	-34,07	6,90	3,66	2,22
26000	40,5	-21,3	0,86	-35,11	7,02	3,69	2,28
26500	40,5	-21,1	0,90	-35,20	7,15	3,91	2,36

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

5.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
26,5	43,4	-11,2	4,4				-15,6	3	0,5
27,0	43,4	-11,2	4,4				-15,6	3	0,5
28,0	43,4	-11,1	4,5				-15,6	3	0,5
29,0	43,5	-11,0	4,6				-15,6	3	0,5
30,0	43,5	-10,9	4,7				-15,6	3	0,5
31,0	43,5	-10,8	4,7				-15,6	3	0,5
32,0	43,5	-10,7	4,8				-15,6	3	0,5
33,0	43,6	-10,7	4,9				-15,6	3	0,5
34,0	43,6	-10,6	5,0				-15,6	3	0,5
35,0	43,6	-10,5	5,1				-15,6	3	0,5
36,0	43,6	-10,4	5,1				-15,6	3	0,5
37,0	43,7	-10,3	5,2				-15,6	3	0,5
38,0	43,7	-10,2	5,3				-15,6	3	0,5
39,0	43,7	-10,2	5,4				-15,6	3	0,5
40,0	43,8	-10,1	5,5				-15,6	3	0,5

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

6 Photo Report

Photos are included in an external report.

7 Setup Drawings

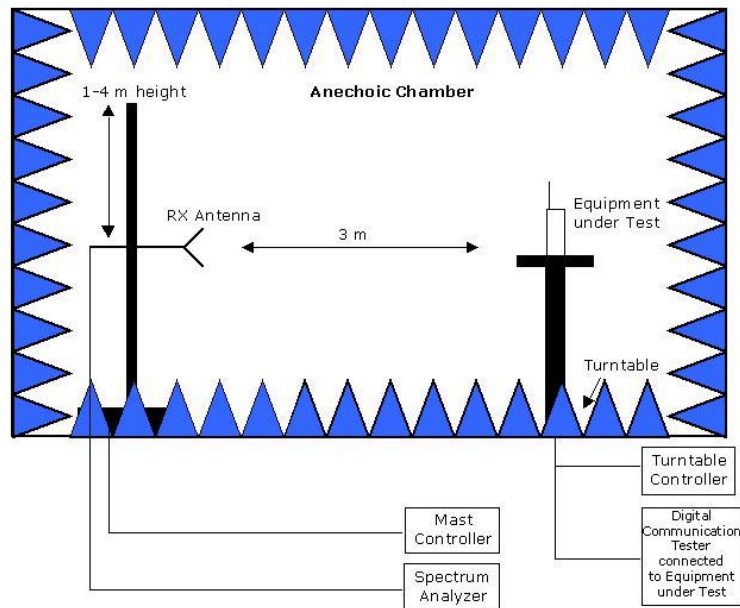

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

8 FCC and IC Correlation of measurement requirements for General Radio Equipment from FCC and IC

General radio equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Transmitter spurious radiated emissions	§ 15.209	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-210 Issue 8: 2.5
Spurious radiated emissions below 490 kHz and restricted to emission level	§ 15.201, CFR47, Part 2, Subpart J; if all emissions ≤ 40 dB below the limit listed in §15.209	RSS-Gen Issue 4: 8.9/8.10; RSS-210 Issue 8: 2.5.1; RSS-310 Issue 3; if all emissions ≤ 40 dB below the limit listed in RSS-Gen
Wanted Emission (Carrier)	§ 15.209	RSS-210 Issue 8: 2.5.1 RSS-Gen Issue 4: 6.12, 8.9
Other requirements, e.g. Transmitter frequency stability	§15.215	RSS- Gen, Issue 4: 6.11/8.11
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	–	RSS-210 Issue 8: 2.3; RSS Gen Issue 4: 5/7 *)


*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.

9 Annex measurement plots

9.1 Radiated emissions and peak output power

9.1.1. Spurious radiated emissions up to 30 MHz – Op-Mode 1

EUT A + EUT B

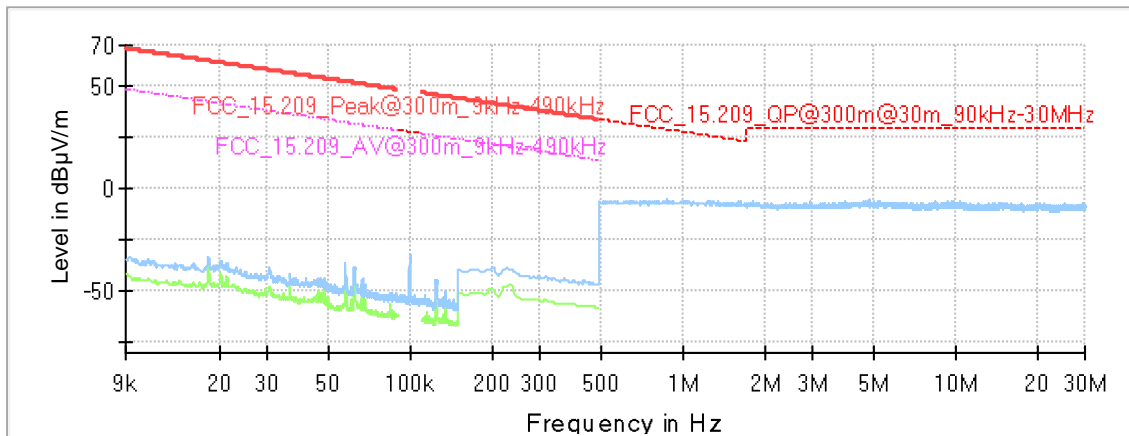

9.1.2. Spurious radiated emissions above 30 MHz – Op_Mode 1

EUT A & EUT B

