



FCC CFR47 PART 15 SUBPART E

**CERTIFICATION TEST REPORT
CLASS II PERMISSIVE CHANGE**

FOR

QUAD-BAND RADIO WITH WLAN AND BT RADIO

Model: A1453 / A1533

FCC ID: BCG-E2642A

REPORT NUMBER: 15U21850-E37V2

ISSUE DATE: NOVEMBER 24, 2015

Prepared for

**APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	11/16/15	Initial issue. Upgrade 13U14987-6 report to 5.2/5.3/5.6GHz band to new rule per KDB 789033 D02 v01.	J. Vang
V2	11/24/15	Revised report to address TCB's question	T. Chu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>7</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE</i>	<i>8</i>
5.3. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>9</i>
5.5. <i>SOFTWARE AND FIRMWARE.....</i>	<i>9</i>
5.6. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	11
7.1.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>11</i>
7.1.2. <i>MEASUREMENT METHOD FOR POWER AND PPSD</i>	<i>11</i>
7.1.3. <i>MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz</i>	<i>11</i>
7.1.4. <i>DUTY CYCLE PLOTS</i>	<i>12</i>
8. ANTENNA PORT TEST RESULTS	14
8.1. <i>802.11a MODE IN THE 5.2 GHz BAND.....</i>	<i>14</i>
8.1.1. <i>26 dB BANDWIDTH.....</i>	<i>14</i>
8.1.2. <i>99% BANDWIDTH.....</i>	<i>16</i>
8.1.3. <i>AVERAGE POWER.....</i>	<i>18</i>
8.1.4. <i>OUTPUT POWER AND PSD.....</i>	<i>19</i>
8.2. <i>802.11n HT20 MODE IN THE 5.2 GHz BAND</i>	<i>23</i>
8.2.1. <i>26 dB BANDWIDTH.....</i>	<i>23</i>
8.2.2. <i>99% BANDWIDTH.....</i>	<i>25</i>
8.2.3. <i>AVERAGE POWER</i>	<i>27</i>
8.2.4. <i>OUTPUT POWER AND PSD.....</i>	<i>28</i>
8.3. <i>802.11n HT40 MODE IN THE 5.2 GHz BAND</i>	<i>32</i>
8.3.1. <i>26 dB BANDWIDTH.....</i>	<i>32</i>
8.3.2. <i>99% BANDWIDTH.....</i>	<i>34</i>
8.3.3. <i>AVERAGE POWER</i>	<i>36</i>

8.3.4. OUTPUT POWER AND PPSD37

8.4. 802.11a MODE IN THE 5.3 GHz BAND.....40

8.4.1. 26 dB BANDWIDTH.....40

8.4.2. 99% BANDWIDTH.....42

8.4.3. AVERAGE POWER.....44

8.4.4. OUTPUT POWER AND PPSD45

8.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND49

8.5.1. 26 dB BANDWIDTH.....49

8.5.2. 99% BANDWIDTH.....51

8.5.3. AVERAGE POWER.....53

8.5.4. OUTPUT POWER AND PPSD54

8.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND58

8.6.1. 26 dB BANDWIDTH.....58

8.6.2. 99% BANDWIDTH.....60

8.6.3. AVERAGE POWER.....62

8.6.4. OUTPUT POWER AND PPSD63

8.7. 802.11a MODE IN THE 5.6 GHz BAND.....66

8.7.1. 26 dB BANDWIDTH.....66

8.7.2. 99% BANDWIDTH.....68

8.7.3. AVERAGE POWER.....70

8.7.4. OUTPUT POWER AND PPSD71

8.8. 802.11n HT20 MODE IN THE 5.6 GHz BAND75

8.8.1. 26 dB BANDWIDTH.....75

8.8.2. 99% BANDWIDTH.....77

8.8.3. AVERAGE POWER.....79

8.8.4. OUTPUT POWER AND PPSD80

8.9. 802.11n HT40 MODE IN THE 5.6 GHz BAND84

8.9.1. 26 dB BANDWIDTH.....84

8.9.2. 99% BANDWIDTH.....86

8.9.3. AVERAGE POWER.....88

8.9.4. OUTPUT POWER AND PPSD89

9. RADIATED TEST RESULTS.....93

9.1. LIMITS AND PROCEDURE.....93

9.2. TRANSMITTER ABOVE 1 GHz.....94

9.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND94

9.2.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....102

9.2.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....110

9.2.4. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND116

9.2.5. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....124

9.2.6. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....132

9.2.7. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND138

9.2.8. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND.....147

9.2.9. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND.....156

9.2.10. 2.4GHz and 5GHz Band Co-Location.....165

9.3. WORST-CASE BELOW 1 GHz.....169

10. AC POWER LINE CONDUCTED EMISSIONS171

11. DYNAMIC FREQUENCY SELECTION175

11.1. OVERVIEW..... 175

11.1.1. LIMITS 175

11.1.2. TEST AND MEASUREMENT SYSTEM 178

11.1.3. SETUP OF EUT (CLIENT MODE)..... 181

11.1.4. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE) 182

11.1.5. DESCRIPTION OF EUT..... 183

11.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH..... 185

11.2.1. TEST CHANNEL..... 185

11.2.2. RADAR WAVEFORM AND TRAFFIC 185

11.2.3. OVERLAPPING CHANNEL TESTS 187

11.2.4. MOVE AND CLOSING TIME..... 187

11.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH..... 192

11.3.1. TEST CHANNEL..... 192

11.3.2. RADAR WAVEFORM AND TRAFFIC 192

11.3.3. OVERLAPPING CHANNEL TESTS 194

11.3.4. MOVE AND CLOSING TIME..... 194

11.3.5. NON-OCCUPANCY PERIOD..... 199

11.4. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH.....200

11.4.1. TEST CHANNEL.....200

11.4.2. RADAR WAVEFORM AND TRAFFIC200

11.4.3. OVERLAPPING CHANNEL TESTS202

11.4.4. MOVE AND CLOSING TIME.....202

11.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH.....207

11.5.1. TEST CHANNEL.....207

11.5.2. RADAR WAVEFORM AND TRAFFIC207

11.5.3. OVERLAPPING CHANNEL TESTS209

11.5.4. MOVE AND CLOSING TIME.....209

13. SETUP PHOTOS214

13.1. ANTENNA PORT SETUP 214

13.2. RADIATED FOR PORTABLE CONFIGURATION 214

13.3. POWERLINE EMISSIONS MEASUREMENT SETUP216

13.4. DYNAMIC FREQUENCY SELECTION MEASUREMENT SETUP217

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: QUAD-BAND RADIO WITH WLAN AND BT RADIO

MODEL: A1453 / A1533

SERIAL NUMBER: C39KD007FHYY

DATE TESTED: MAY 14 – JUNE 13, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL VERIFICATION SERVICES INC. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL VERIFICATION SERVICES INC. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL VERIFICATION SERVICES INC. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL VERIFICATION SERVICES INC. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL VERIFICATION SERVICES INC. By:



Thu Chan
WiSE Operations Manager
UL Verification Services Inc.

Tested By:



Mona Hua
WiSE Technician
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v01r02/D03 v01r01/D06 v01, FCC KDB 789033 D02 v01, ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Model A1453/A1533 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA/EVDO/LTE radio, IEEE 802.11a/b/g/n, Bluetooth and GPS radio. The rechargeable battery is not user accessible.

5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

Upgrade 5.2/5.3/5.6GHz band to new rule per KDB 789033 D02 v01.

We have reviewed the original test report for UNII-1, UNII-2A and UNII-2C bands and are hereby attesting that all current technical requirements are still met and all applicable test procedures remain the same. Therefore, the original report is still applicable and no additional testing is done.

We updated the following on this report:

- Updated report to latest KDB 789033 D02 v01.
- 5.2G output power table limit/PPSD limit.
- Removed IC related information.
- Removed Peak Excursion.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	14.20	26.30
5180 - 5240	802.11n HT20	14.03	25.29
5190 - 5230	802.11n HT40	14.38	27.42
5260 - 5320	802.11a	15.32	34.04
5260 - 5320	802.11n HT20	15.35	34.28
5270 - 5310	802.11n HT40	15.40	34.67
5500 - 5700	802.11a	15.62	36.48
5500 - 5700	802.11n HT20	15.57	36.03
5510 - 5670	802.11n HT40	15.81	38.11

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain as below table.

FREQUENCY (MHZ)	ANTENNA GAIN (dBi)
5150 -- 5250	-5.91
5250 -- 5350	-5.83
5500 -- 5700	-4.25
5725 -- 5850	-4.21

5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was WL Tool FW 6.10.56.166.

5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel for RF radiated emissions below 1GHz tests is channel with highest RF output power.

Based on the investigation results, the highest peak power and enhanced data rate is the worst-case scenario for all measurements.

For the fundamental investigation, the EUT is investigated for vertical and horizontal antenna orientations and the worst case was determined to be at Y-position.

Based on the manufacturer's attestation that the nominal output power is reduced as the data rate increases, the data rates tested represent the highest power and worst-case with respect to EMC performance.

Worst-case data rates were used:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Horn Antenna 1-18GHz	ETS Lindgren	3117	F00131	02/19/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/14
Antenna, Horn, 26.5 GHz	ARA	SWH-28	C01015	05/06/14
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB3	F00027	03/07/14
Peak / Average Power Sensor	Agilent / HP	E9323A	F00163	04/03/14
P-Series single channel Power Meter	Agilent / HP	N1911A	F00164	04/03/14
Spectrum Analyzer, 3Hz-44GHz	Agilent	N9030A	F00127	02/22/14
PreApmplifier, 1-26.5GHz	Agilent	8449B	C01052	10/22/13
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	F00194	05/14/14
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/08/13
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/02/13

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.1.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
802.11a 20 MHz	2.061	2.093	0.985	98.5%	0.00	0.010
802.11n HT20	1.920	1.949	0.985	98.5%	0.00	0.010
802.11n HT40	0.943	0.992	0.951	95.1%	0.22	1.060

7.1.2. MEASUREMENT METHOD FOR POWER AND PPSD

The Duty Cycle is greater than or equal to 98% therefore KDB 789033 Method SA-1 is used.



The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used.


7.1.3. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz

The Duty Cycle is greater than or equal to 98%, KDB 789033 Method AD with Power RMS Averaging is used.

The Duty Cycle is less than 98% and consistent, KDB 789033 Method AD with Power RMS Averaging and duty cycle correction is used.

7.1.4. DUTY CYCLE PLOTS

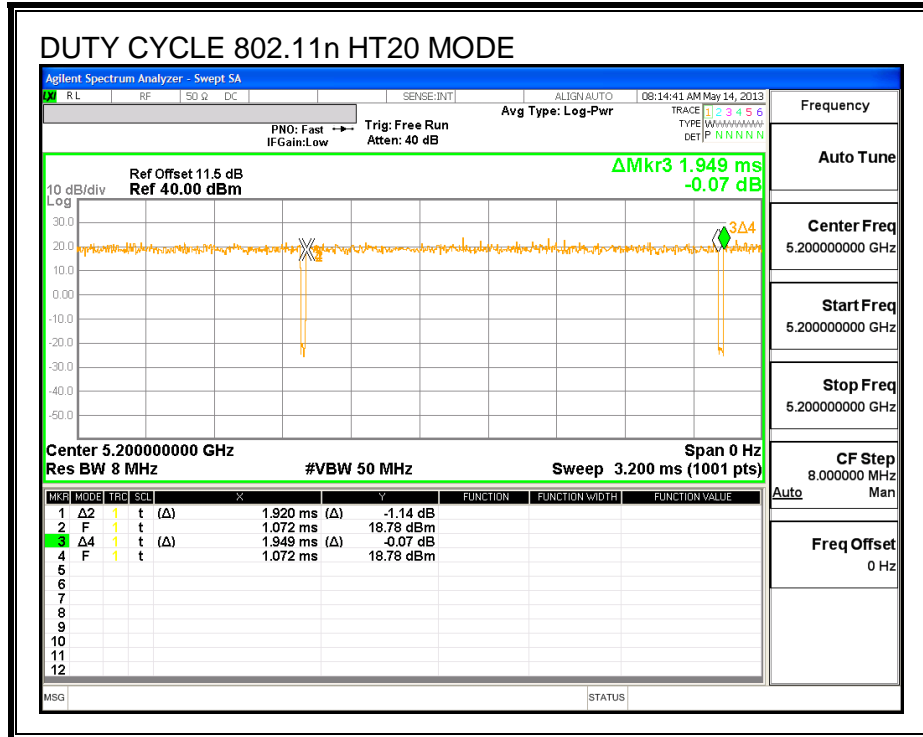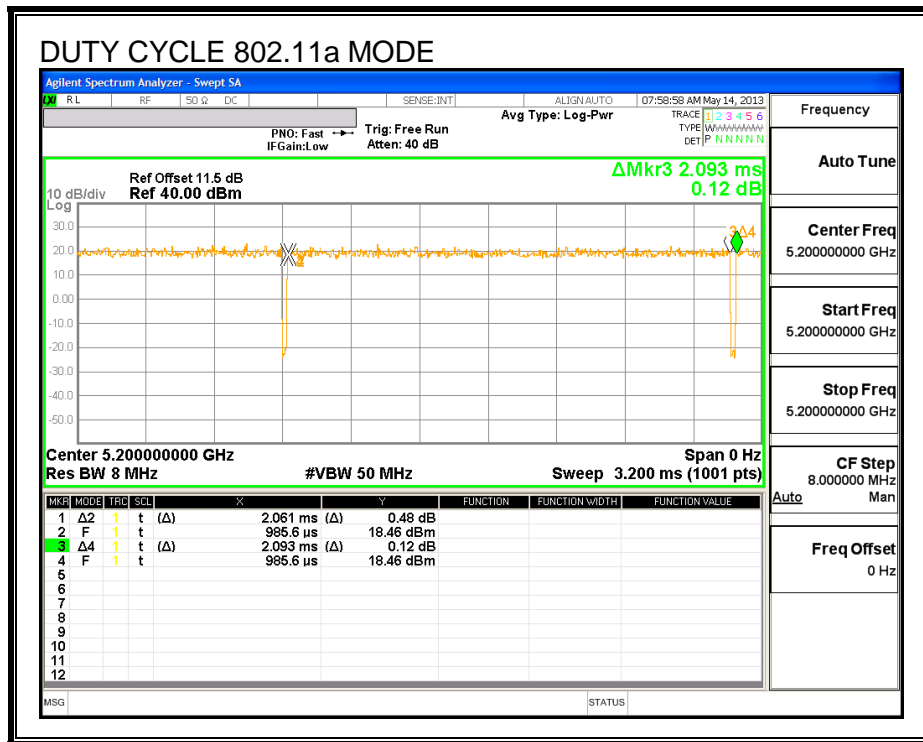

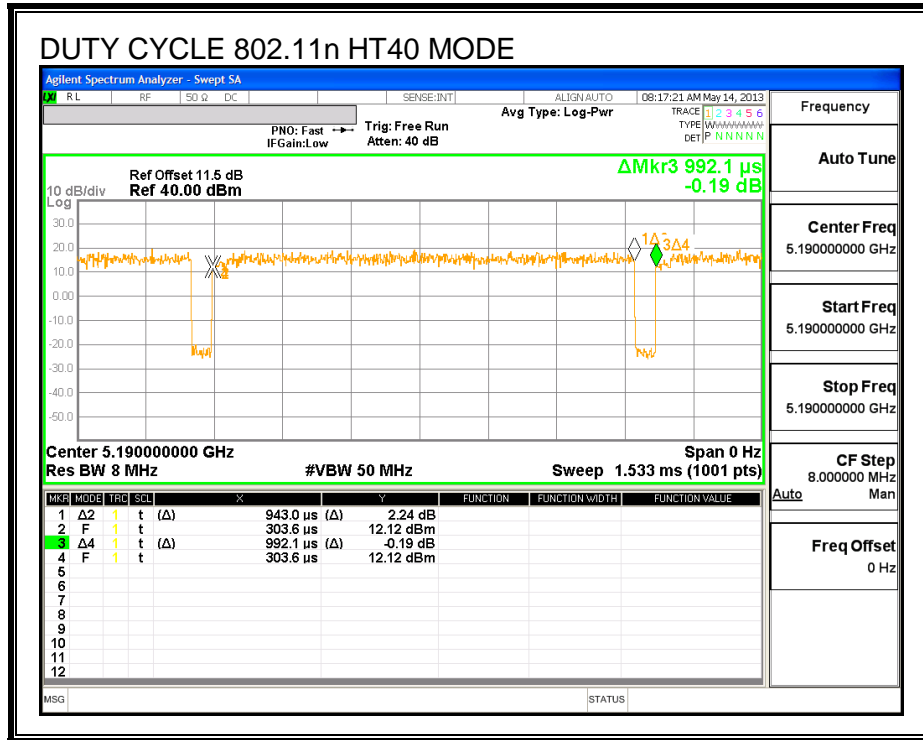

8. ANTENNA PORT TEST RESULTS

8.1. 802.11a MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	18.80
Mid	5200	18.93
High	5240	18.87

26 dB BANDWIDTH

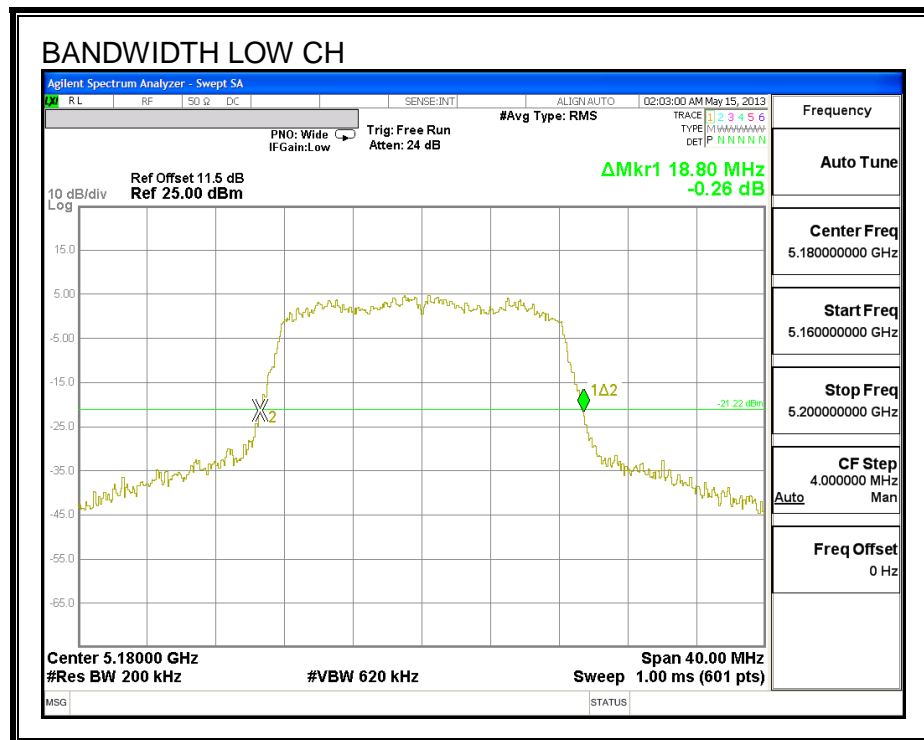

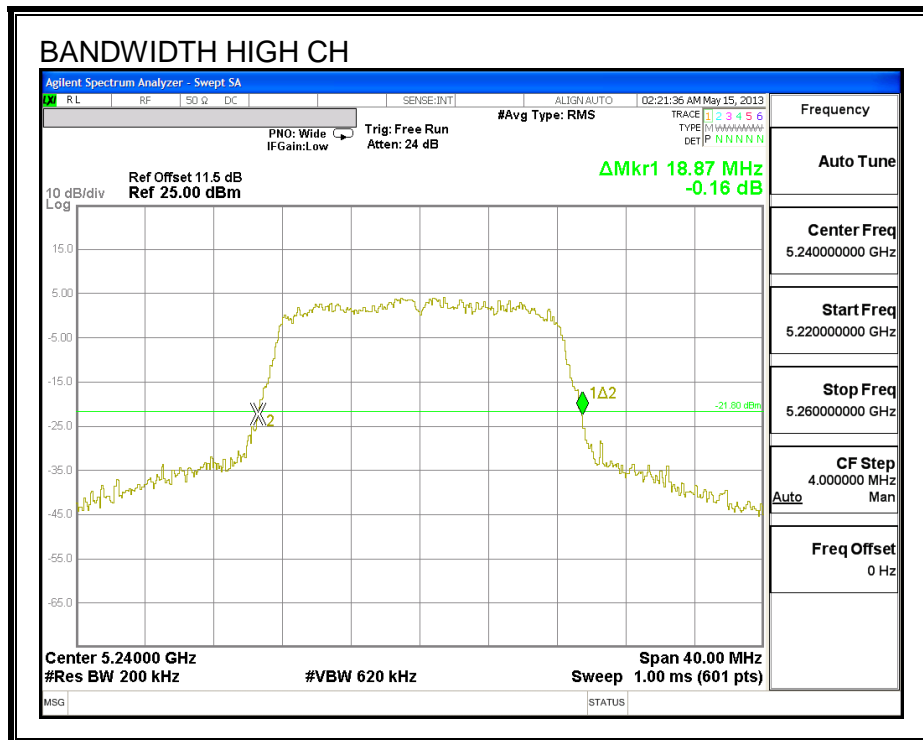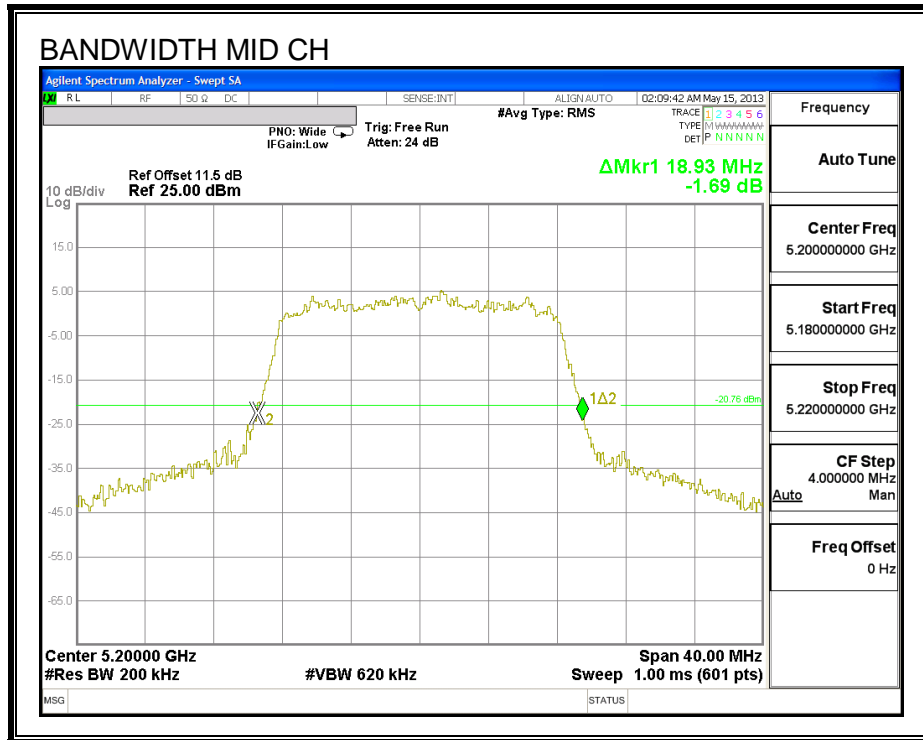

8.1.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	16.276
Mid	5200	16.314
High	5240	16.378

99% BANDWIDTH

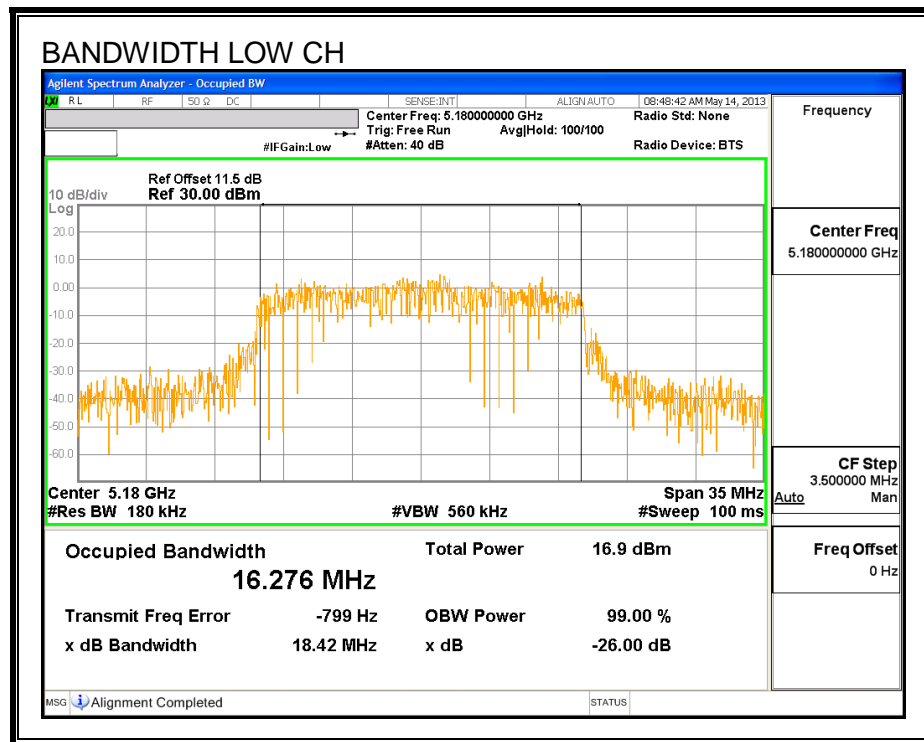

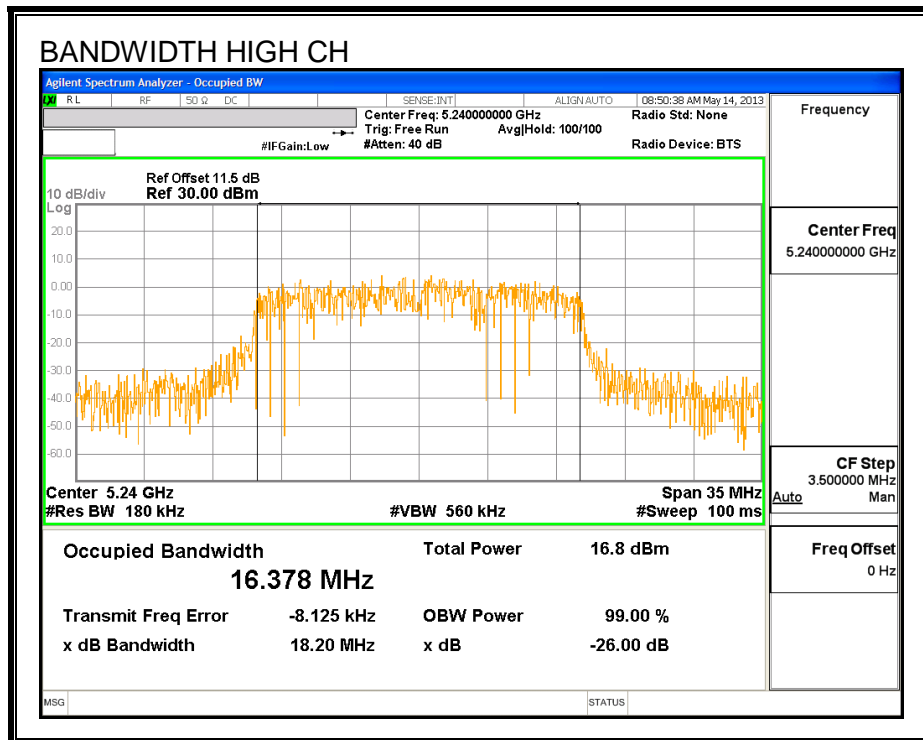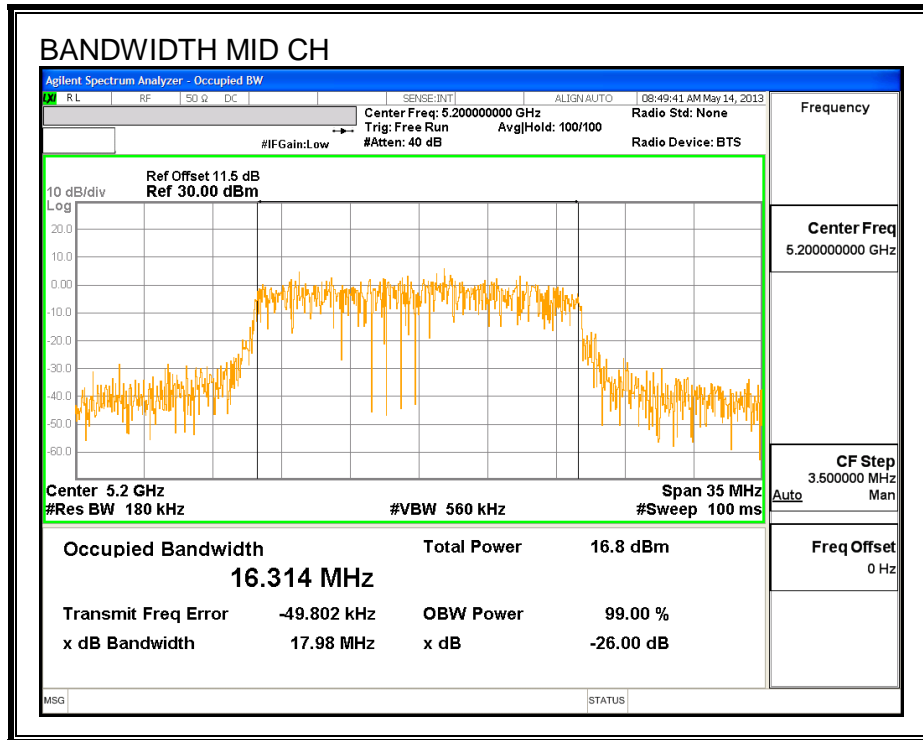

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	13.97
Mid	5200	13.93
High	5240	14.03

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain

Channel	Frequency (MHz)	Directional Gain (dBi)
Low	5180	-5.91
Mid	5200	-5.91
High	5240	-5.91

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PSD Limit (dBm)
Low	5180	24.00	11.00
Mid	5200	24.00	11.00
High	5240	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.01	14.01	24.00	-9.99
Mid	5200	13.91	13.91	24.00	-10.10
High	5240	14.20	14.20	24.00	-9.80

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	3.941	3.941	11.00	-7.06
Mid	5200	3.683	3.683	11.00	-7.32
High	5240	3.947	3.947	11.00	-7.05

OUTPUT POWER AND PSD

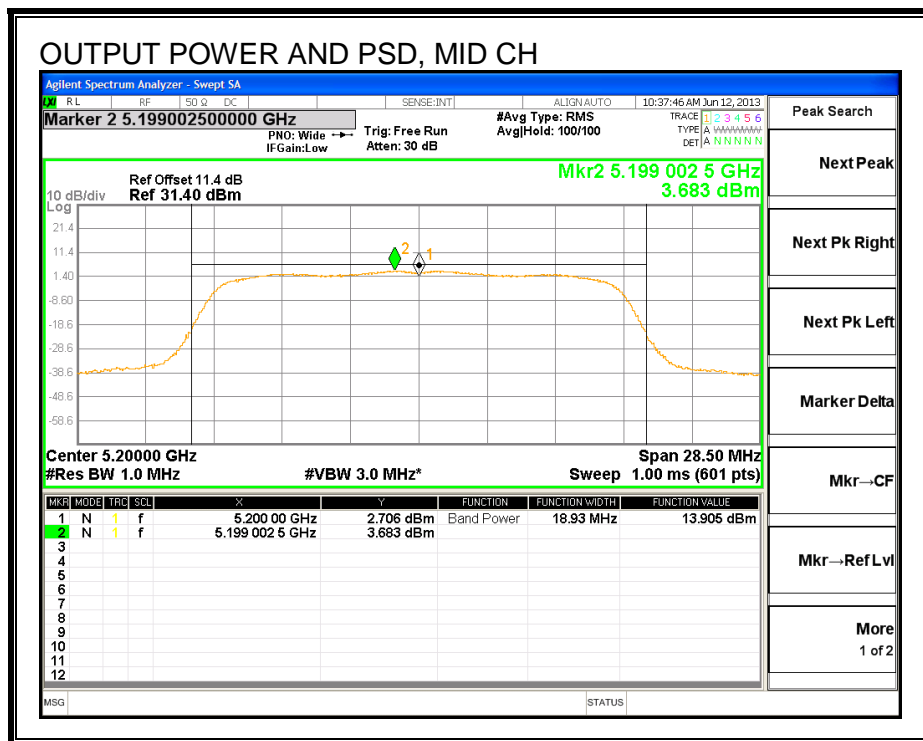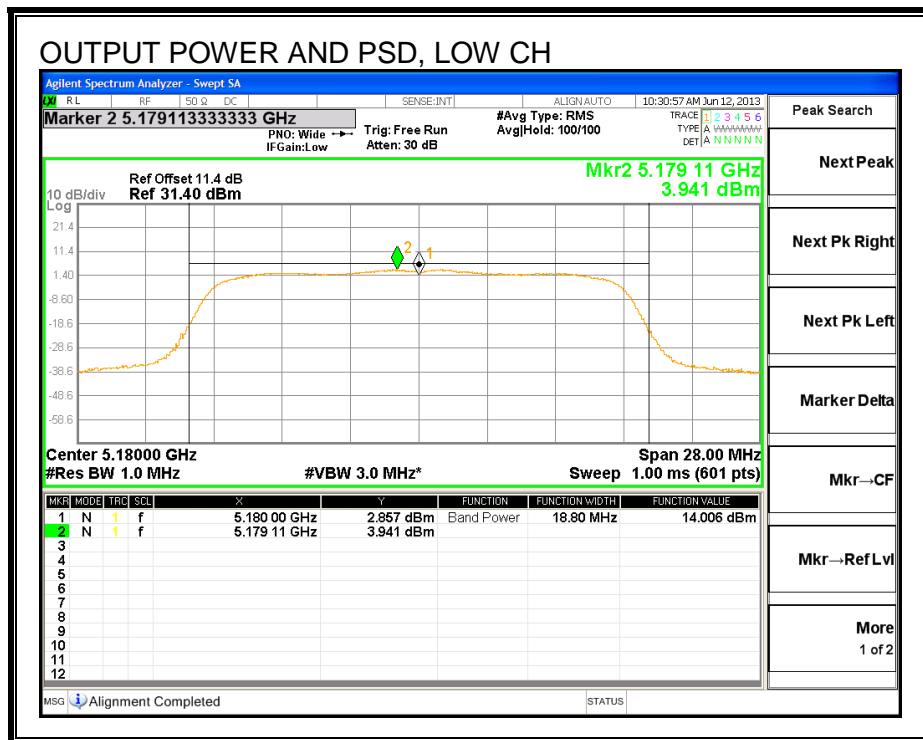

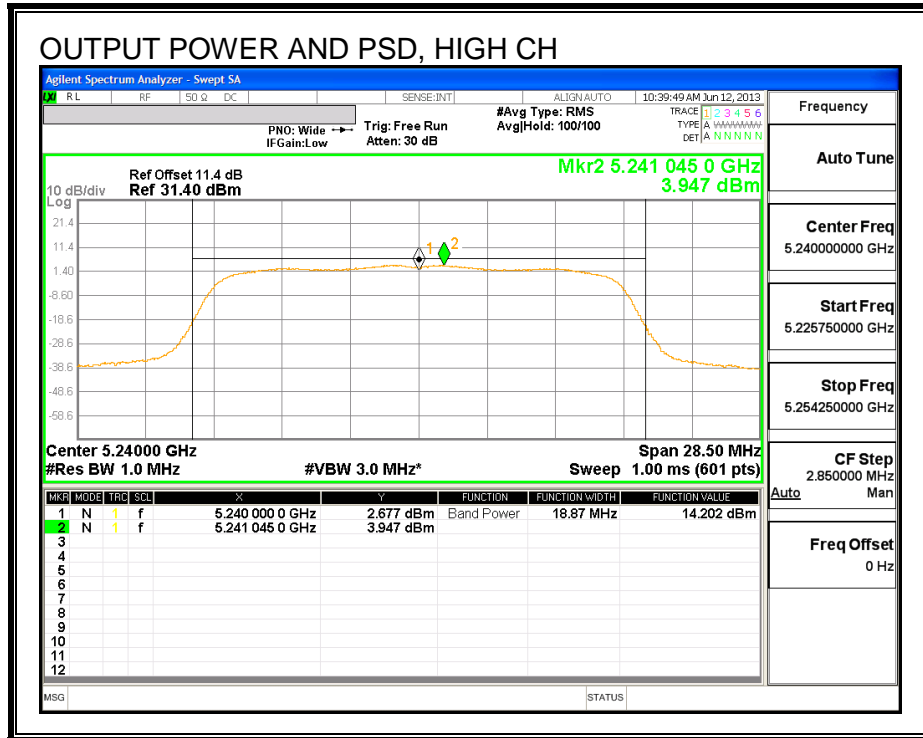

8.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.27
Mid	5200	19.00
High	5240	19.07

26 dB BANDWIDTH

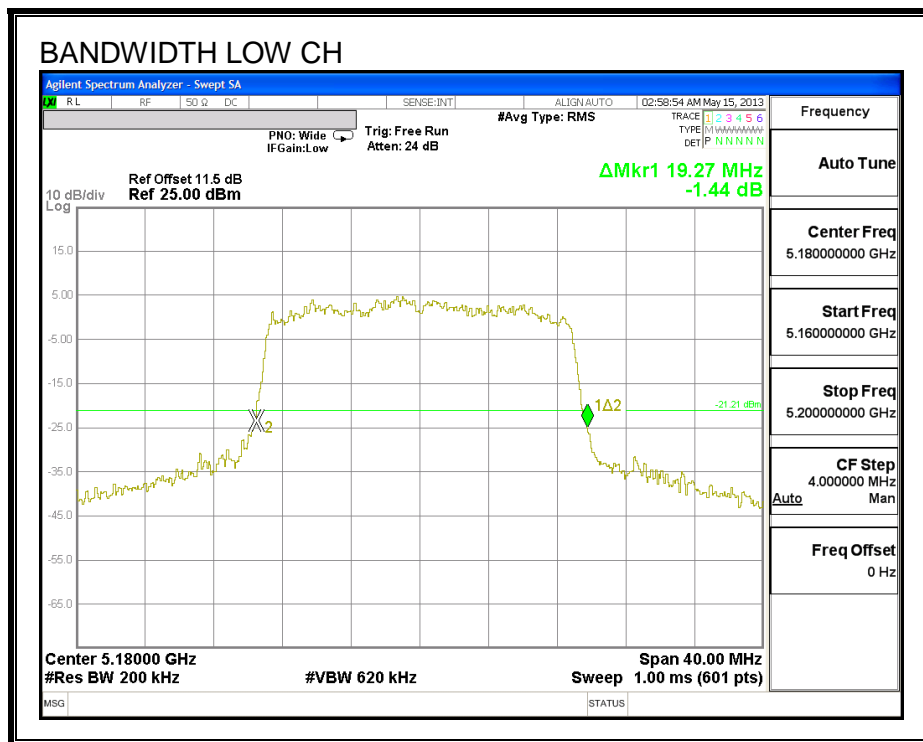

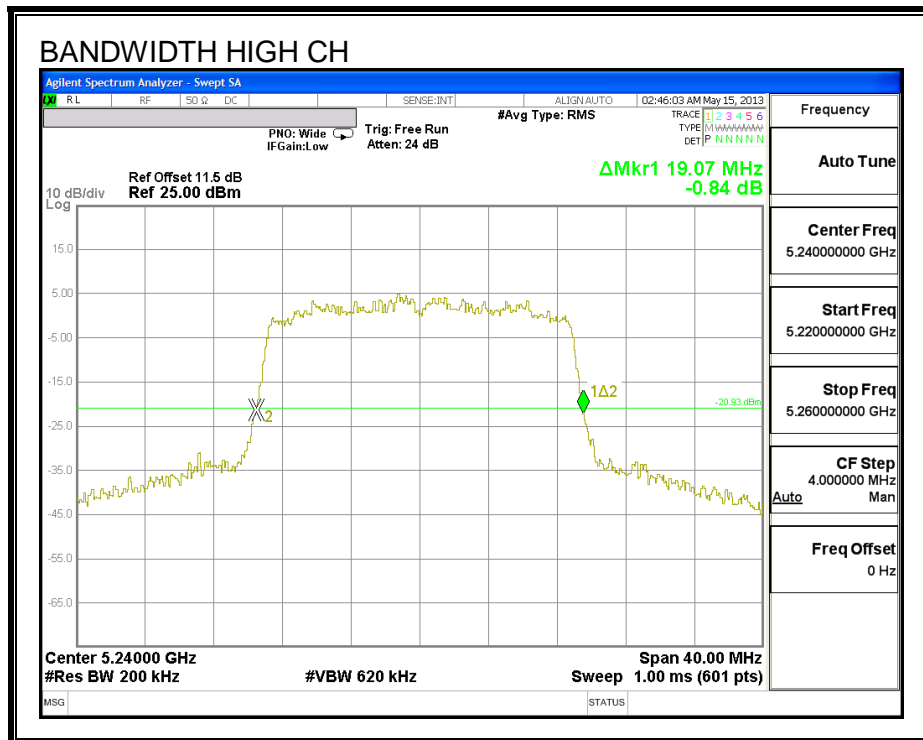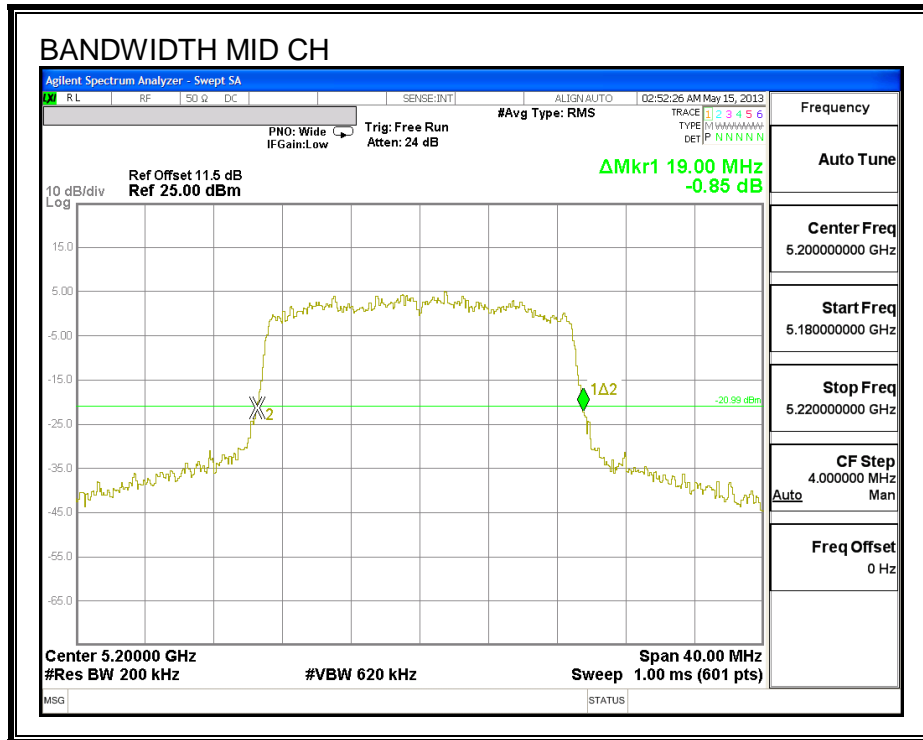

8.2.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.498
Mid	5200	17.446
High	5240	17.565

99% BANDWIDTH

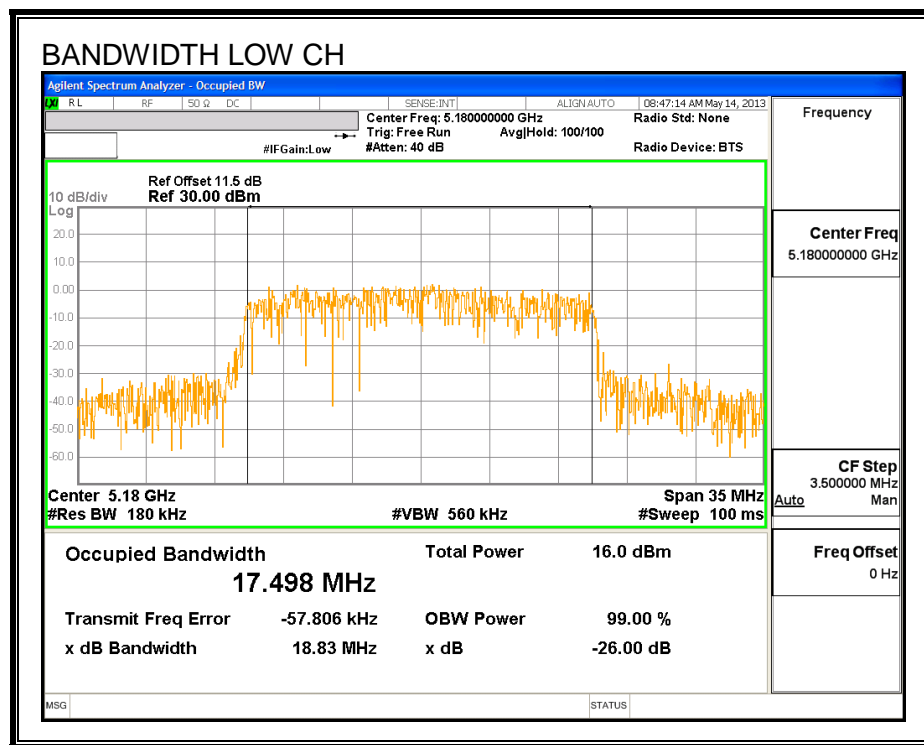

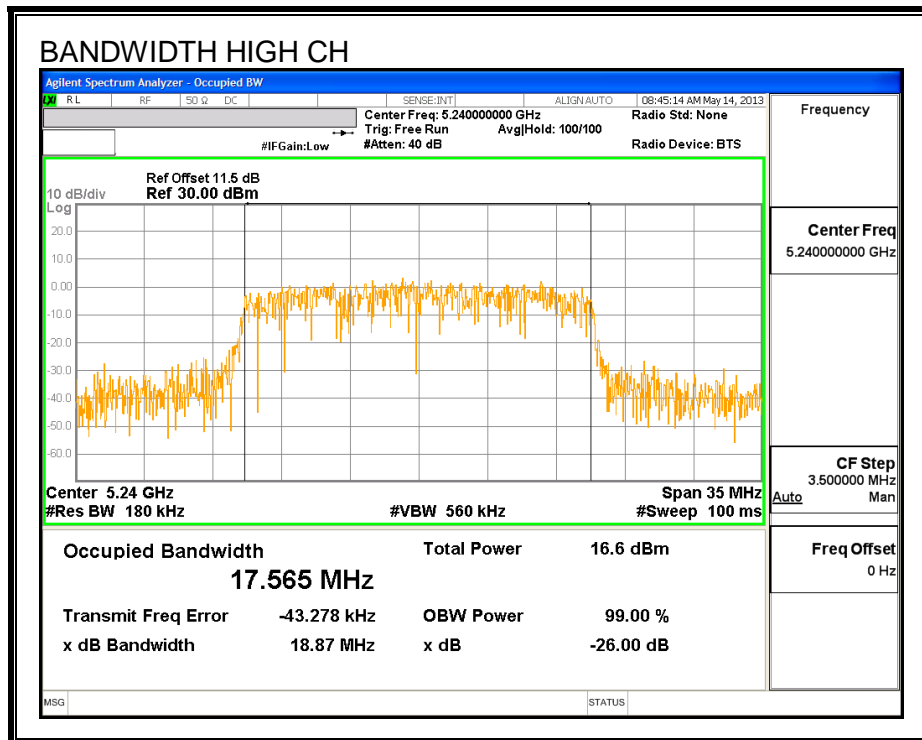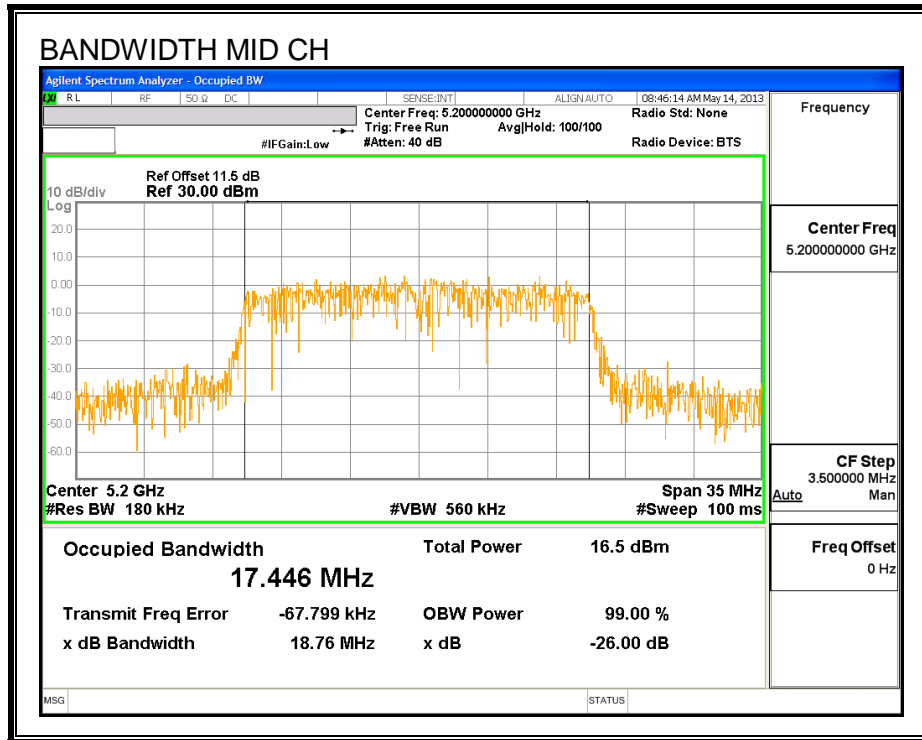

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	13.92
Mid	5200	13.75
High	5240	13.93

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain

Channel	Frequency (MHz)	Directional Gain (dBi)
Low	5180	-5.91
Mid	5200	-5.91
High	5240	-5.91

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PSD Limit (dBm)
Low	5180	24.00	11.00
Mid	5200	24.00	11.00
High	5240	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.94	13.94	24.00	-10.06
Mid	5200	13.81	13.81	24.00	-10.19
High	5240	14.03	14.03	24.00	-9.98

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	3.59	3.59	11.00	-7.41
Mid	5200	3.54	3.54	11.00	-7.46
High	5240	3.69	3.69	11.00	-7.31

OUTPUT POWER AND PSD

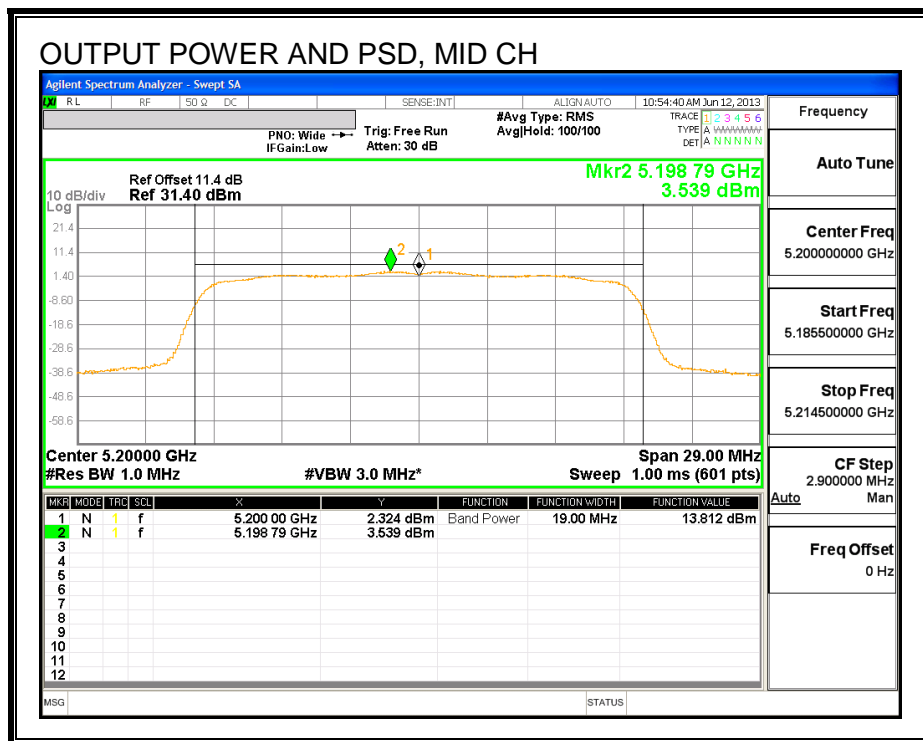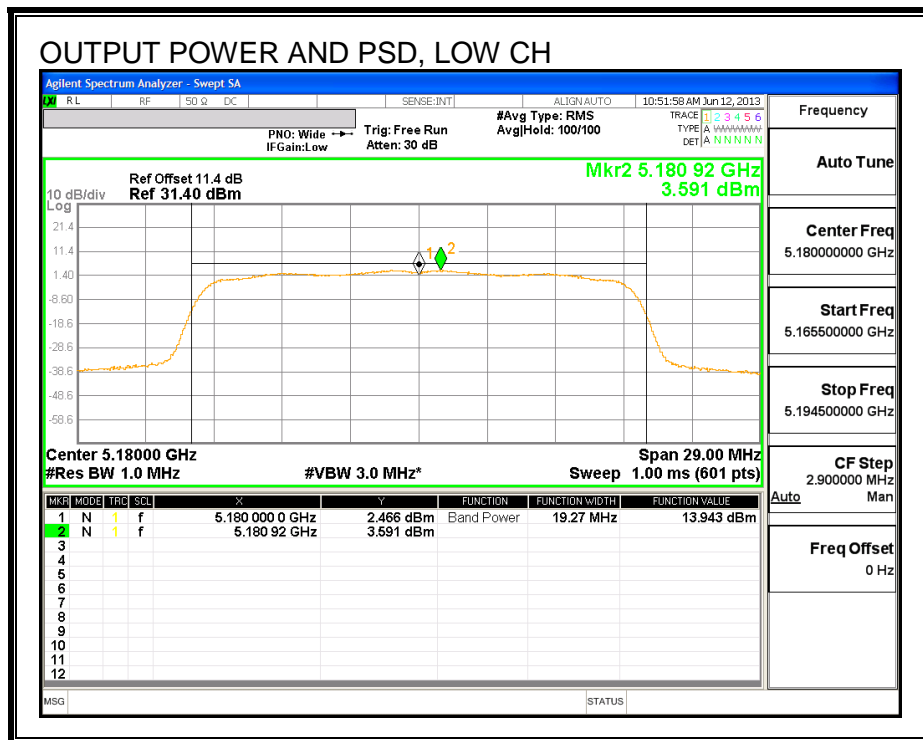

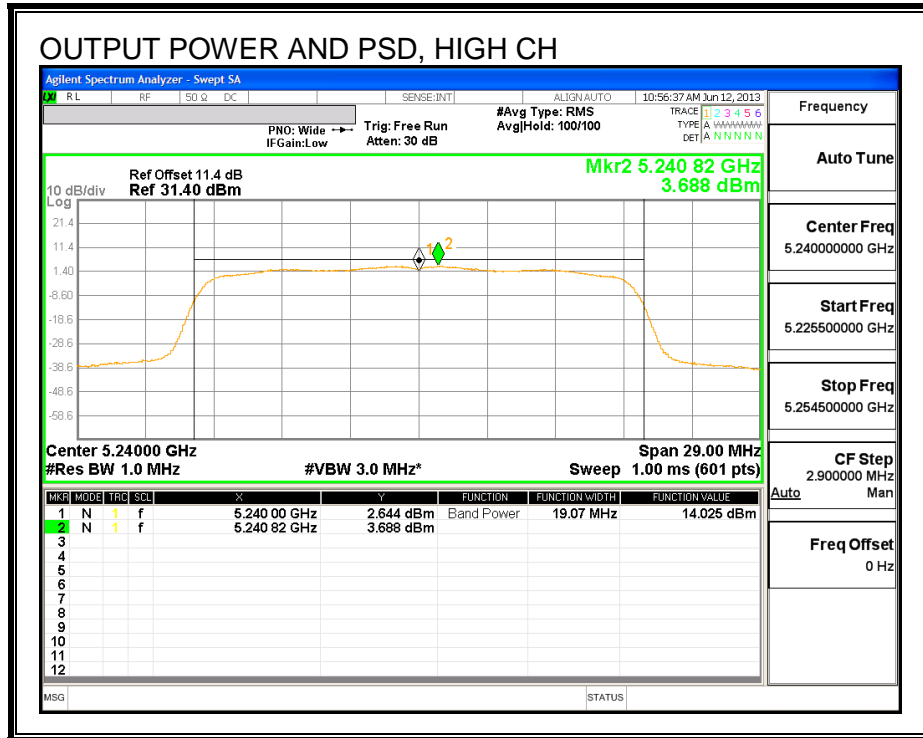

8.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	42.70
High	5230	43.40

26 dB BANDWIDTH

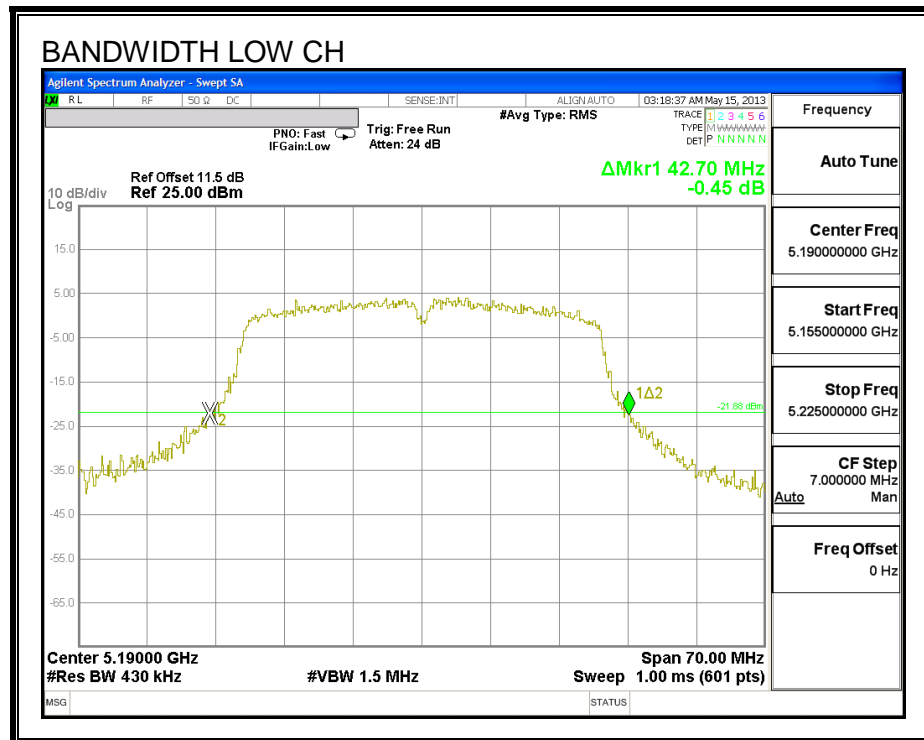

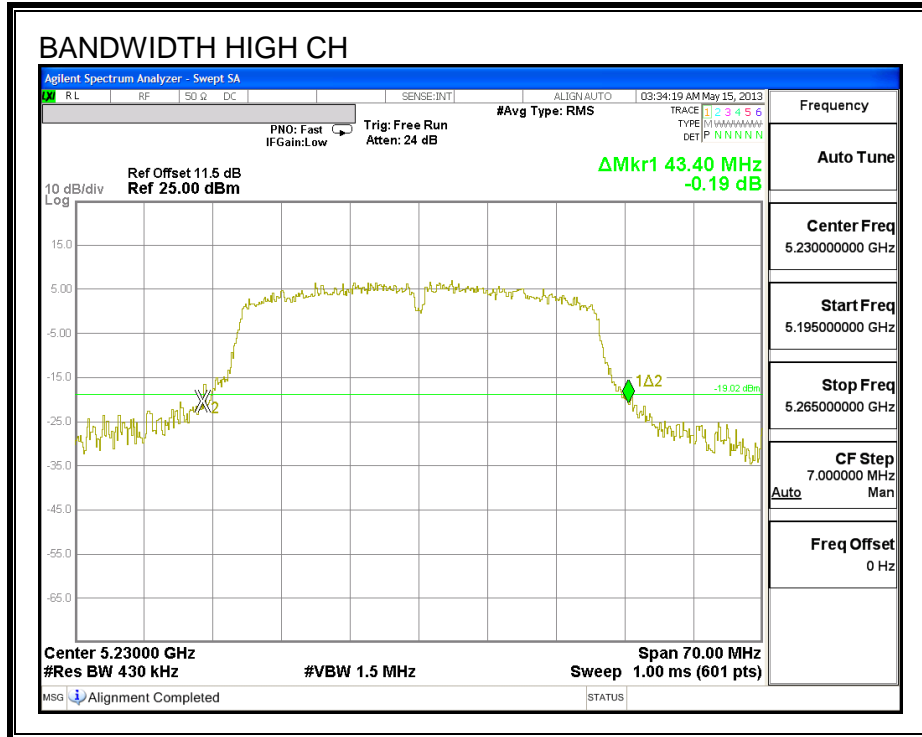

8.3.2. 99% BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	35.951
High	5230	35.954

99% BANDWIDTH

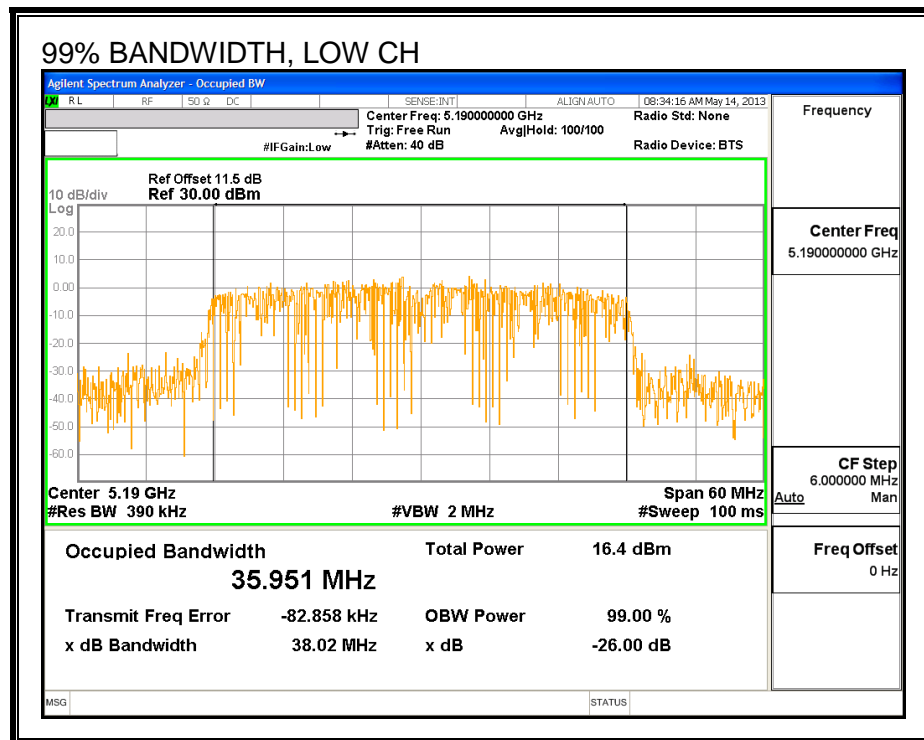

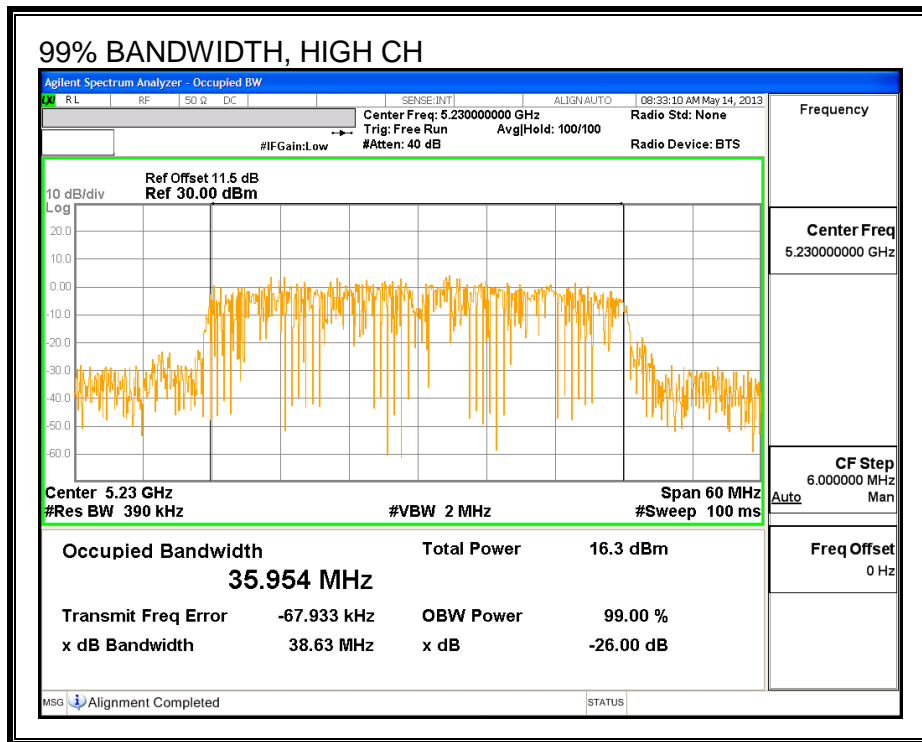

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.82
High	5230	14.14

8.3.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain

Channel	Frequency (MHz)	Directional Gain (dBi)
Low	5190	-5.91
High	5230	-5.91

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5190	24.00	11.00
High	5230	24.00	11.00

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.945	14.17	24.00	-9.84
High	5230	14.164	14.38	24.00	-9.62

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-0.227	-0.01	11.00	-11.01
High	5230	0.650	0.87	11.00	-10.13

OUTPUT POWER AND PPSD

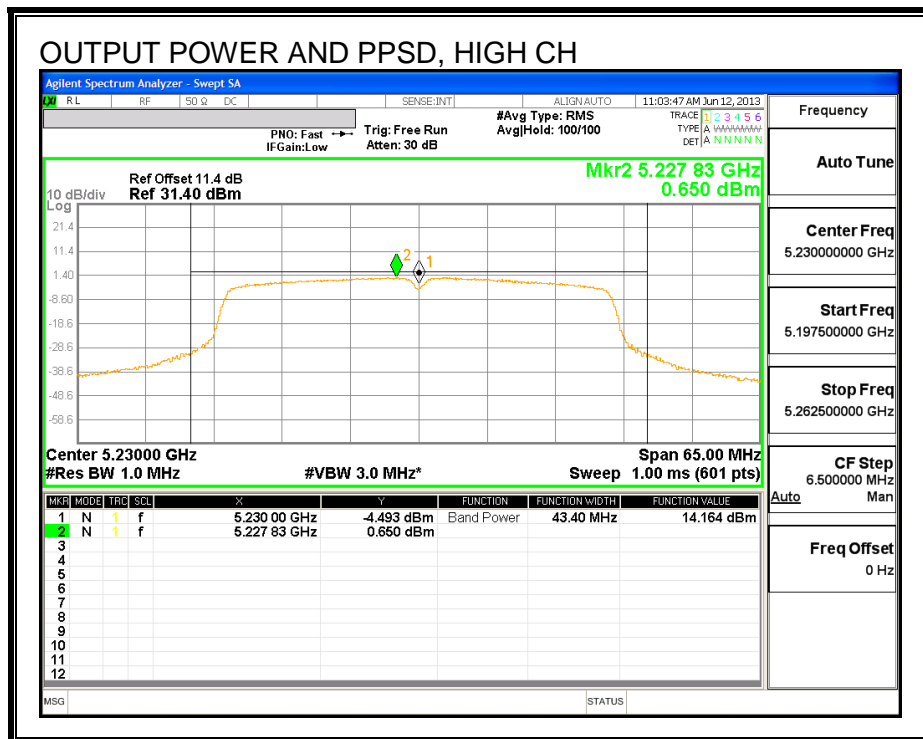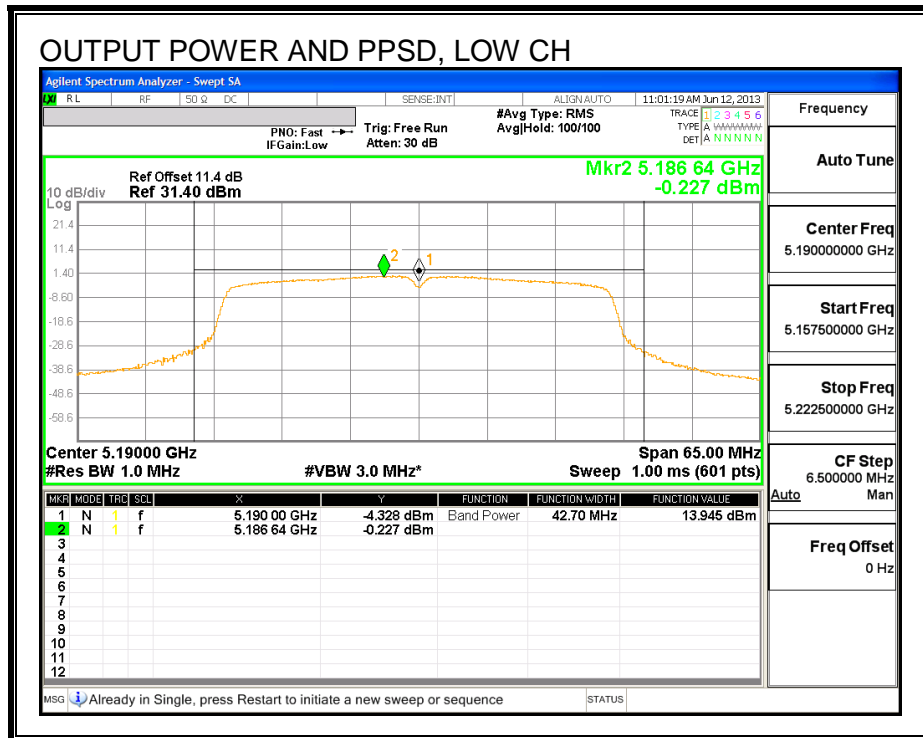

8.4. 802.11a MODE IN THE 5.3 GHz BAND

8.4.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	18.87
Mid	5300	18.67
High	5320	19.20

26 dB BANDWIDTH

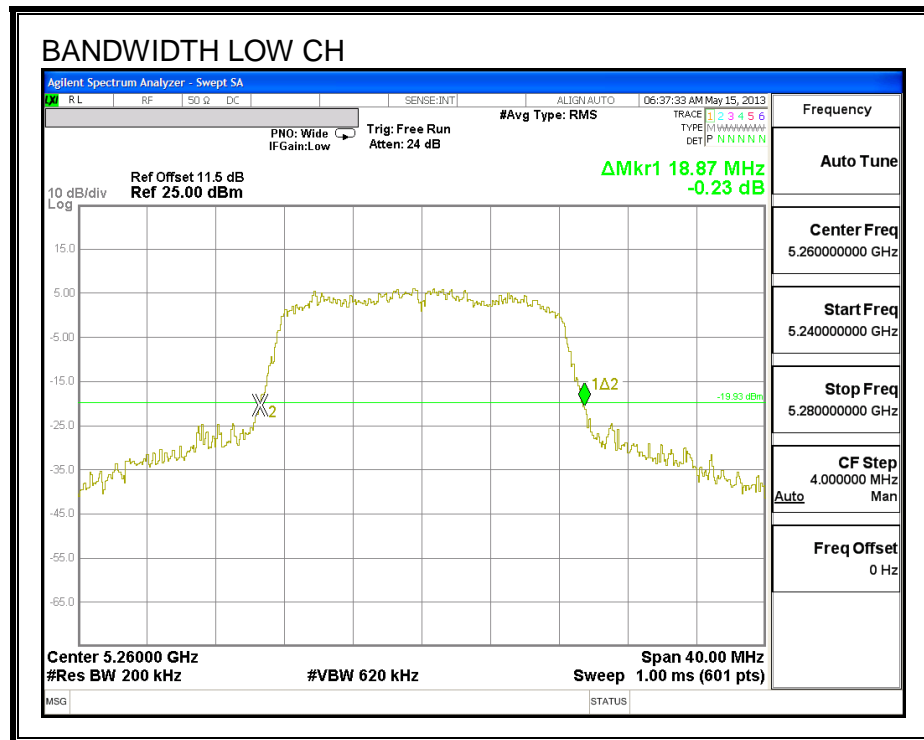

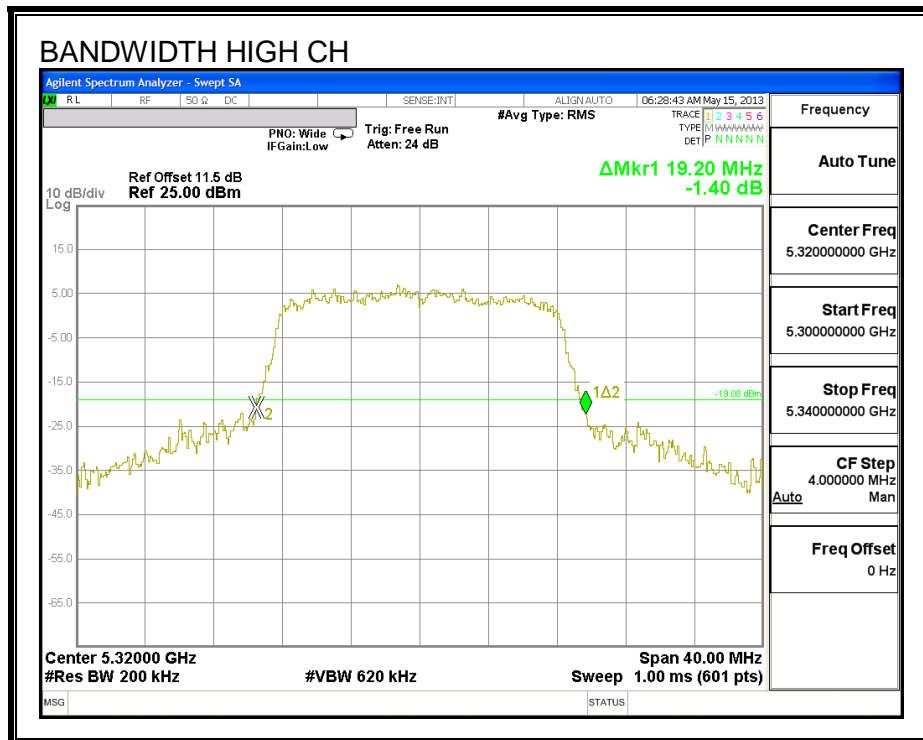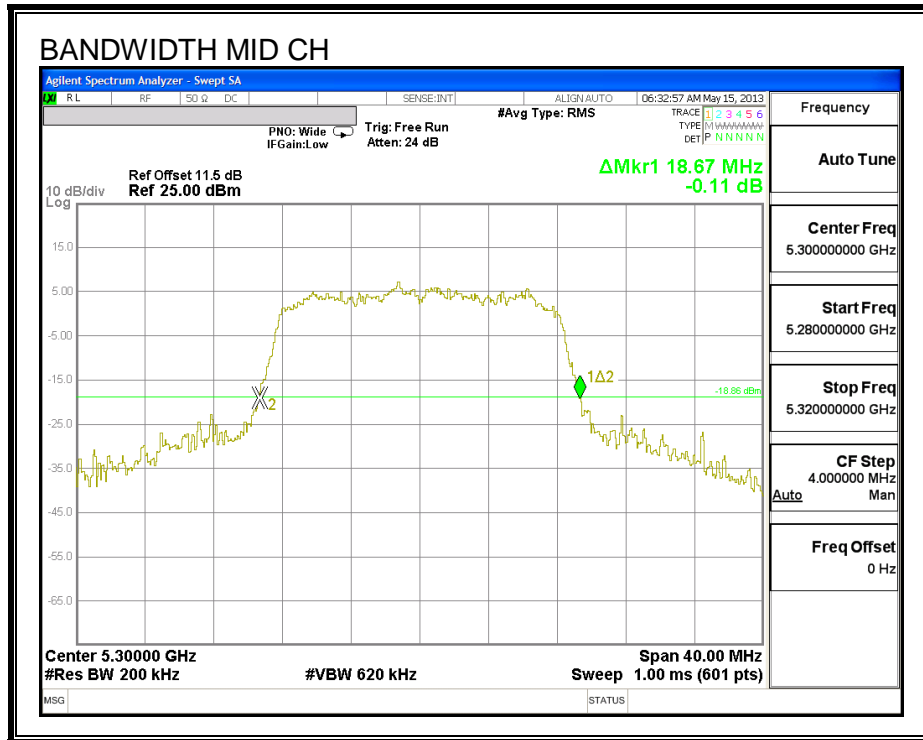

8.4.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.332
Mid	5300	16.335
High	5320	16.339

99% BANDWIDTH

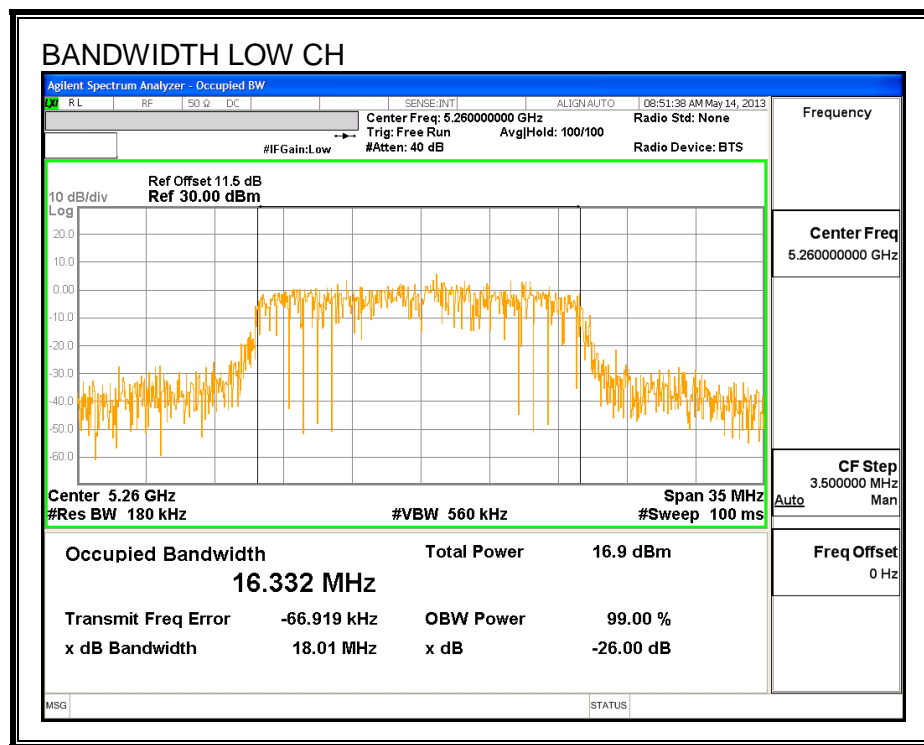

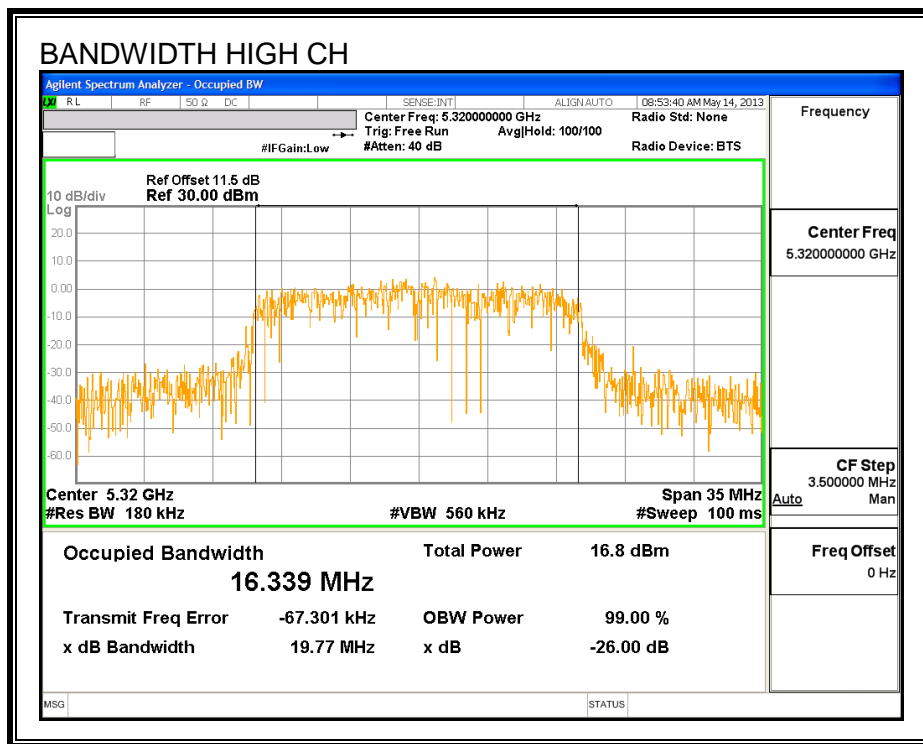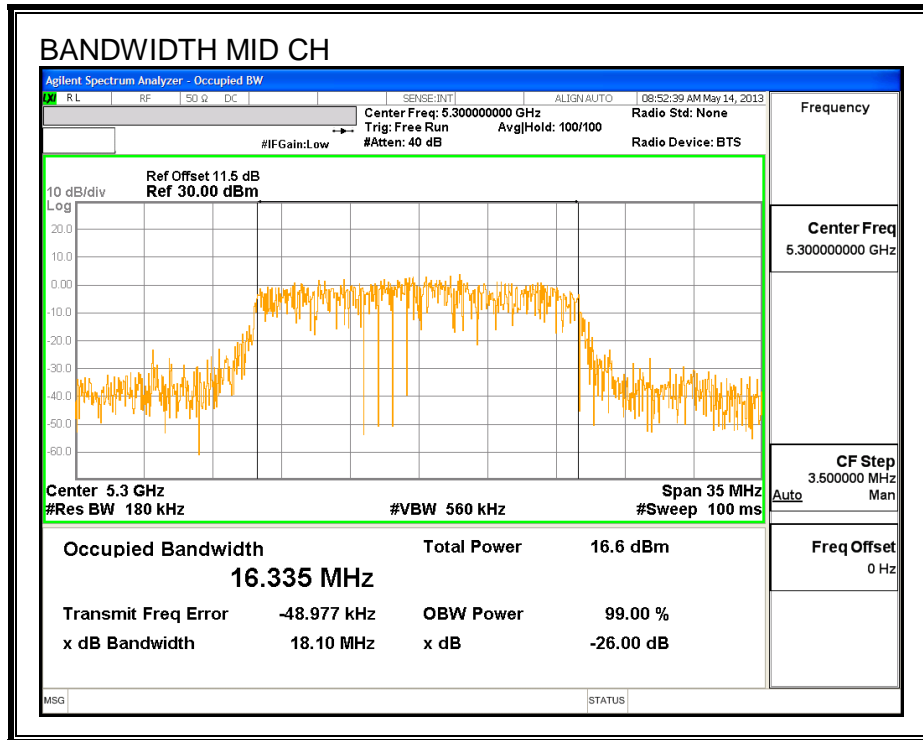

8.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	15.07
Mid	5300	14.84
High	5320	15.21

8.4.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5260	18.9	-5.83
Mid	5300	18.7	-5.83
High	5320	19.2	-5.83

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5260	23.76	11.00
Mid	5300	23.71	11.00
High	5320	23.83	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.18	15.18	23.76	-8.58
Mid	5300	14.88	14.88	23.71	-8.83
High	5320	15.32	15.32	23.83	-8.52

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	4.972	4.97	11.00	-6.03
Mid	5300	4.734	4.73	11.00	-6.27
High	5320	5.270	5.27	11.00	-5.73

OUTPUT POWER AND PPSD

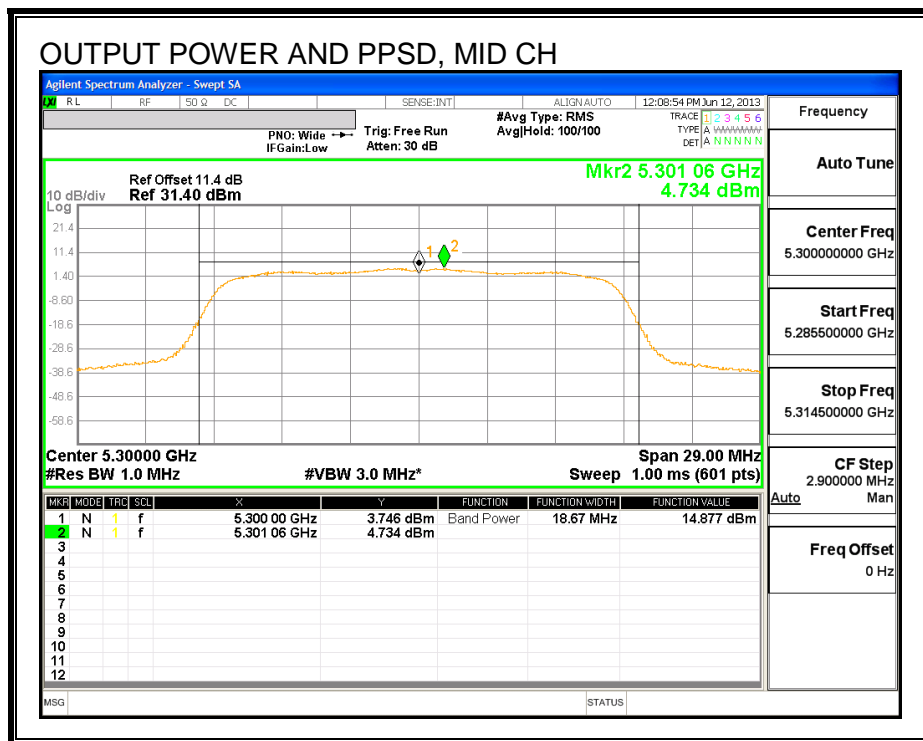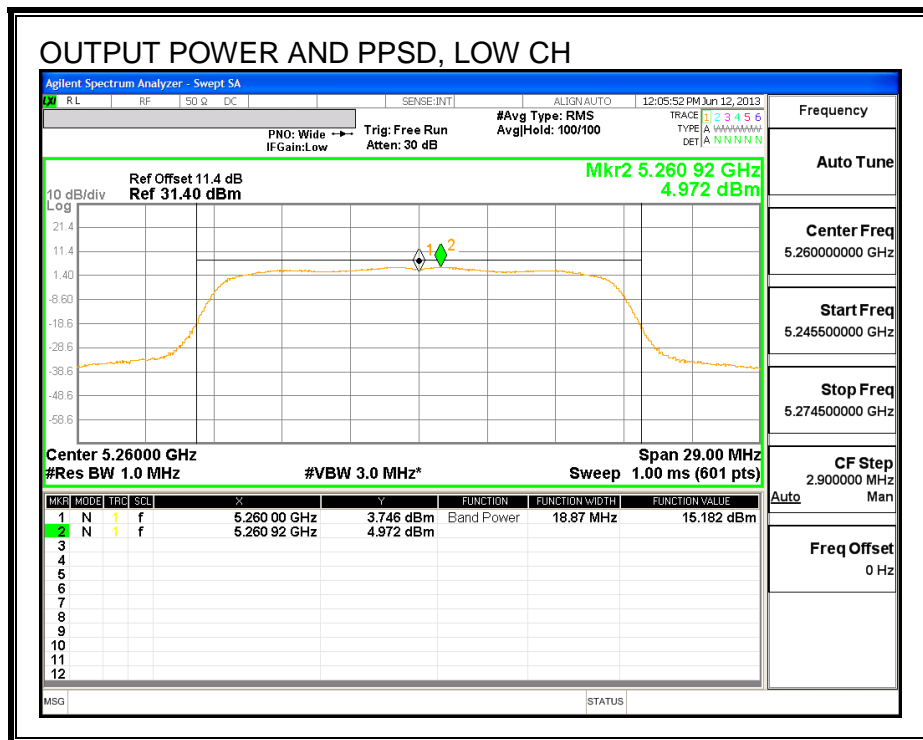

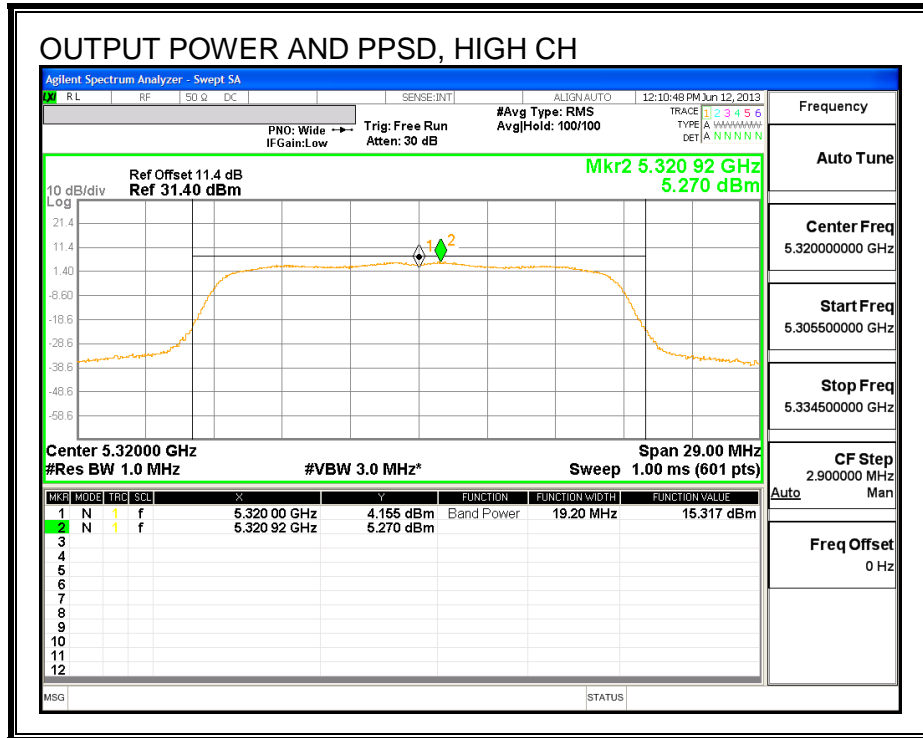

8.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND

8.5.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	19.67
Mid	5300	19.27
High	5320	19.20

26 dB BANDWIDTH

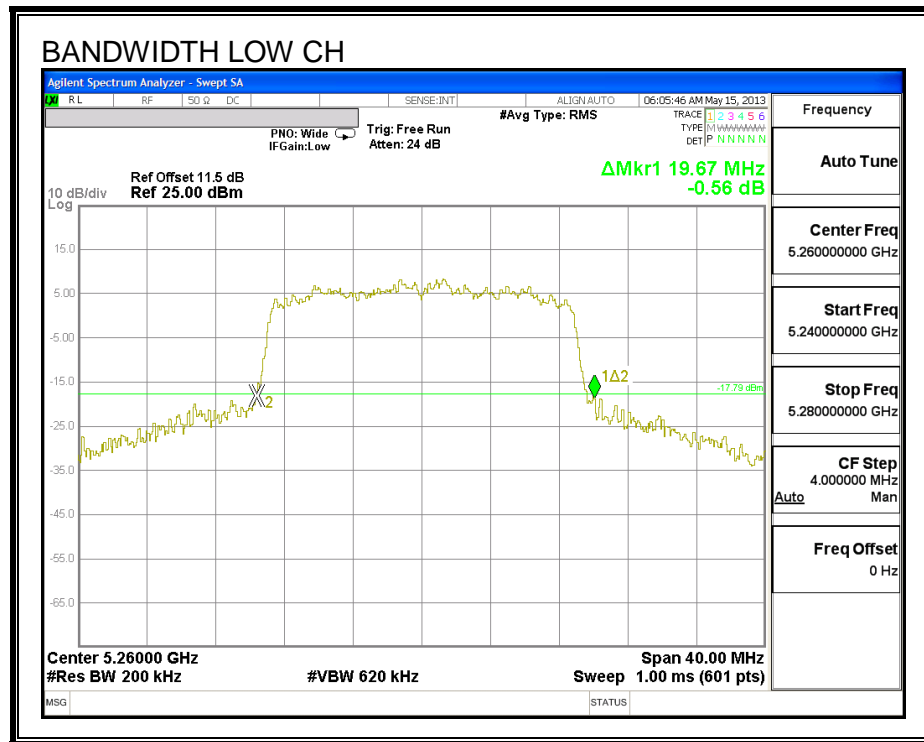

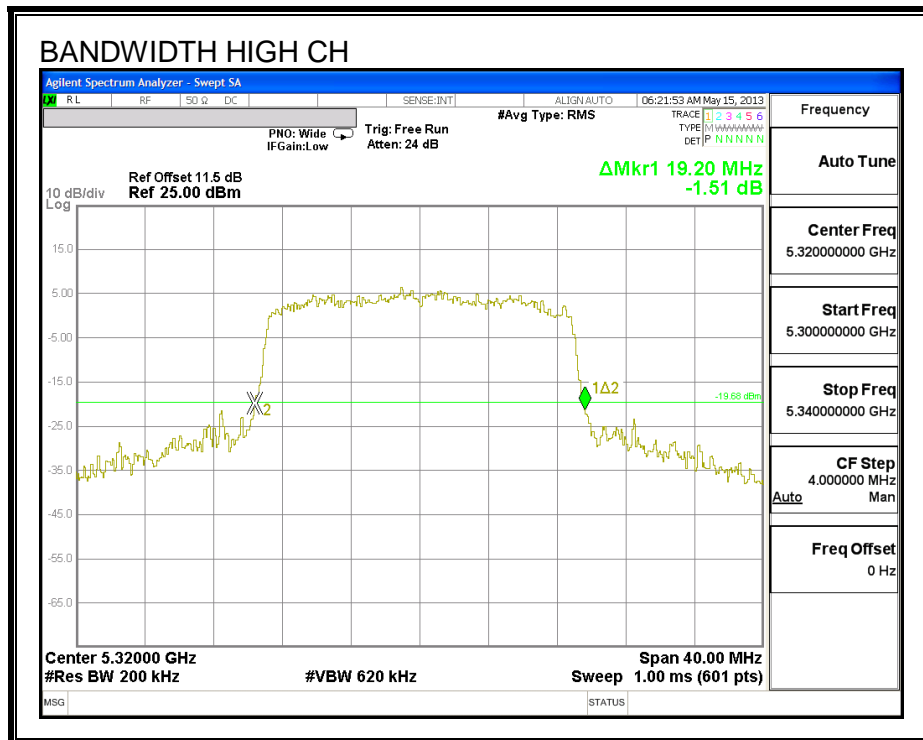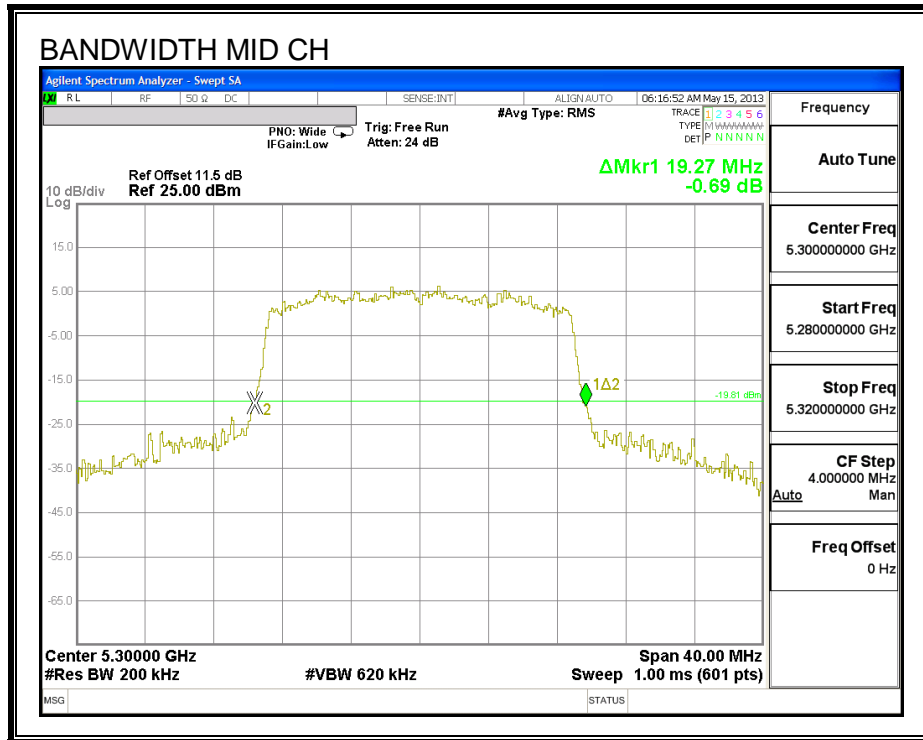

8.5.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.429
Mid	5300	17.514
High	5320	17.542

99% BANDWIDTH

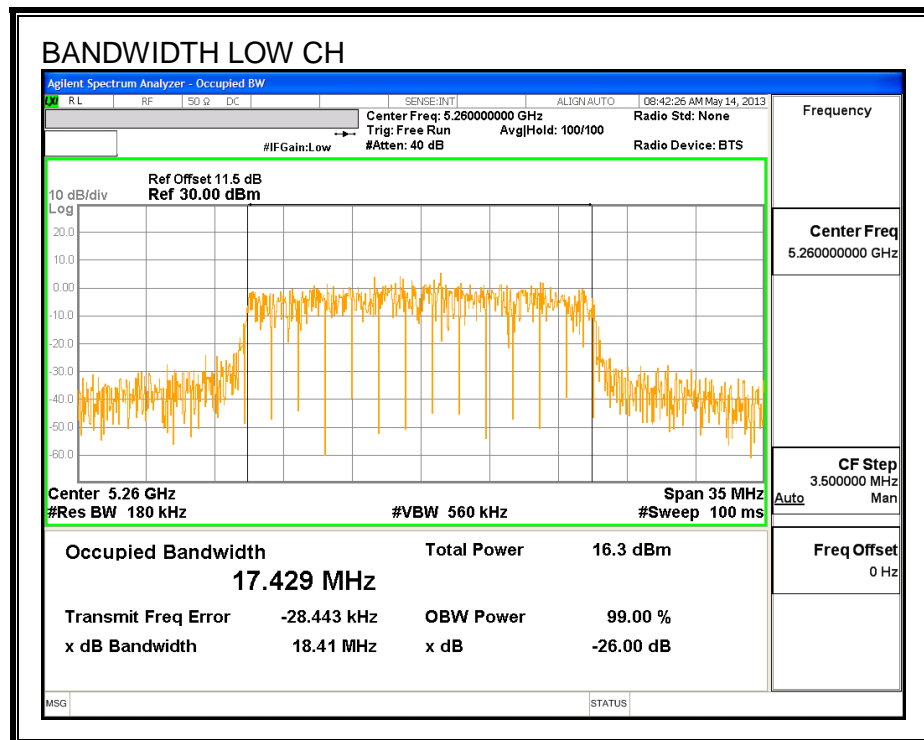

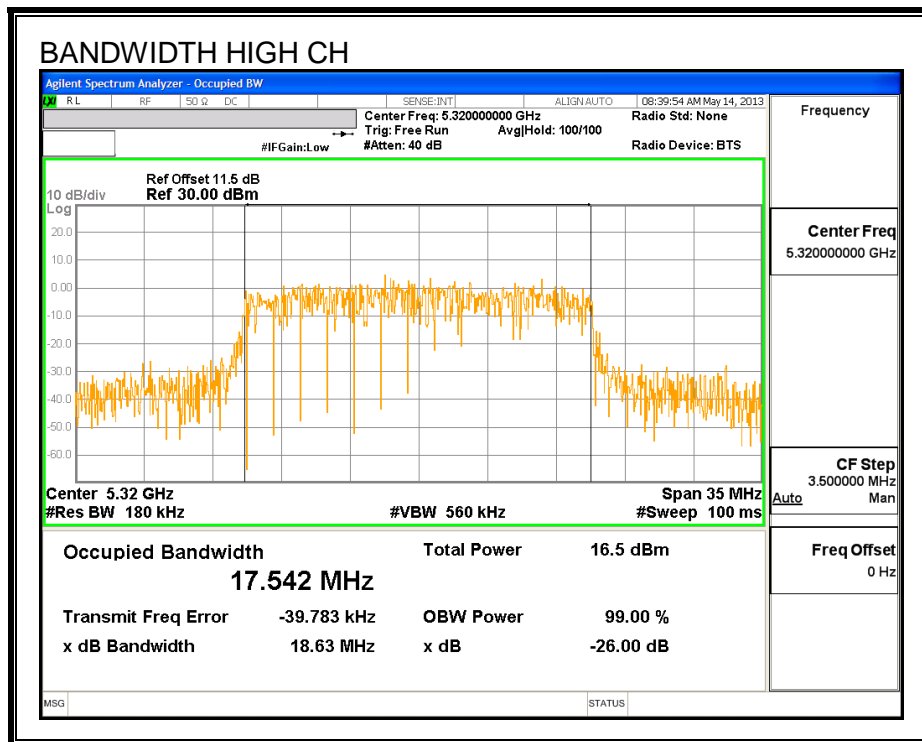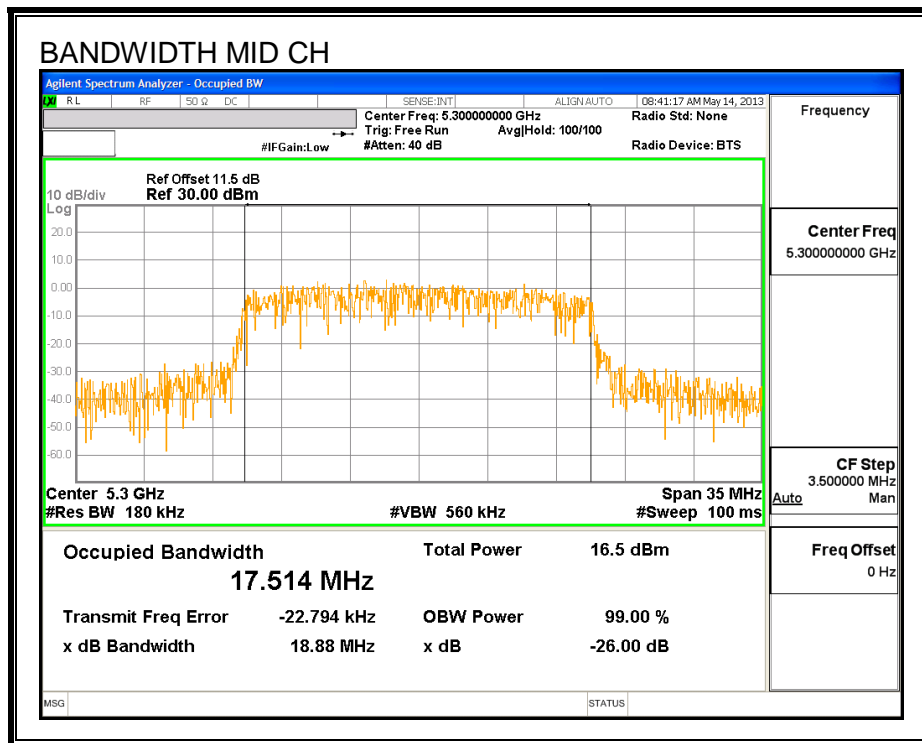

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	15.00
Mid	5300	15.05
High	5320	15.12

8.5.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5260	19.7	-5.83
Mid	5300	19.3	-5.83
High	5320	19.2	-5.83

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5260	23.94	11.00
Mid	5300	23.85	11.00
High	5320	23.83	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.03	15.03	23.94	-8.91
Mid	5300	15.35	15.35	23.85	-8.50
High	5320	15.14	15.14	23.83	-8.70

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	5.37	5.37	11.00	-5.63
Mid	5300	5.08	5.08	11.00	-5.92
High	5320	4.88	4.88	11.00	-6.12

OUTPUT POWER AND PPSD

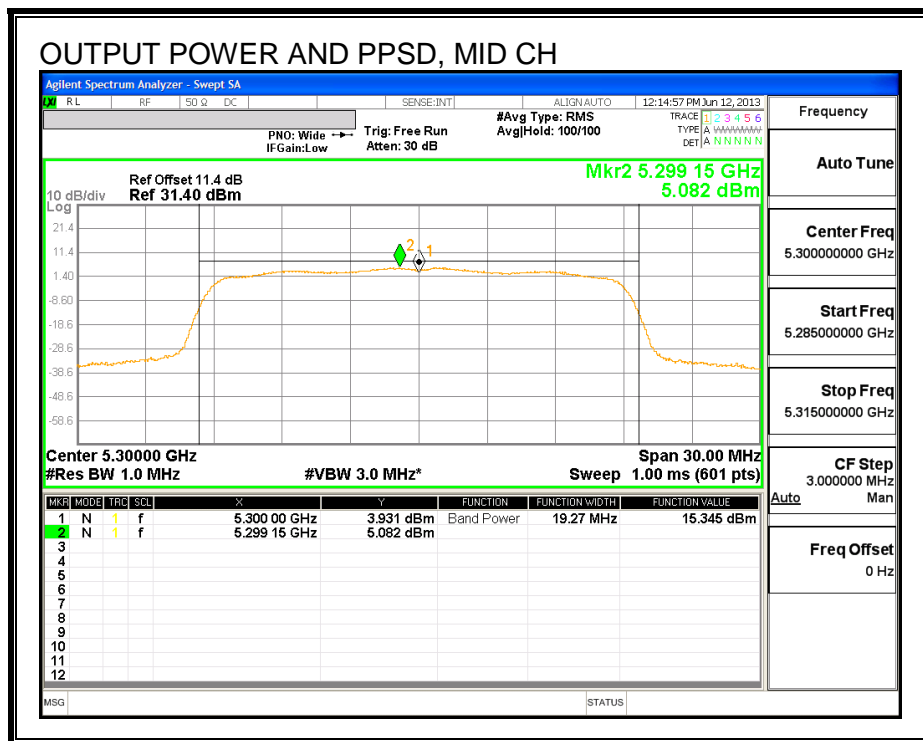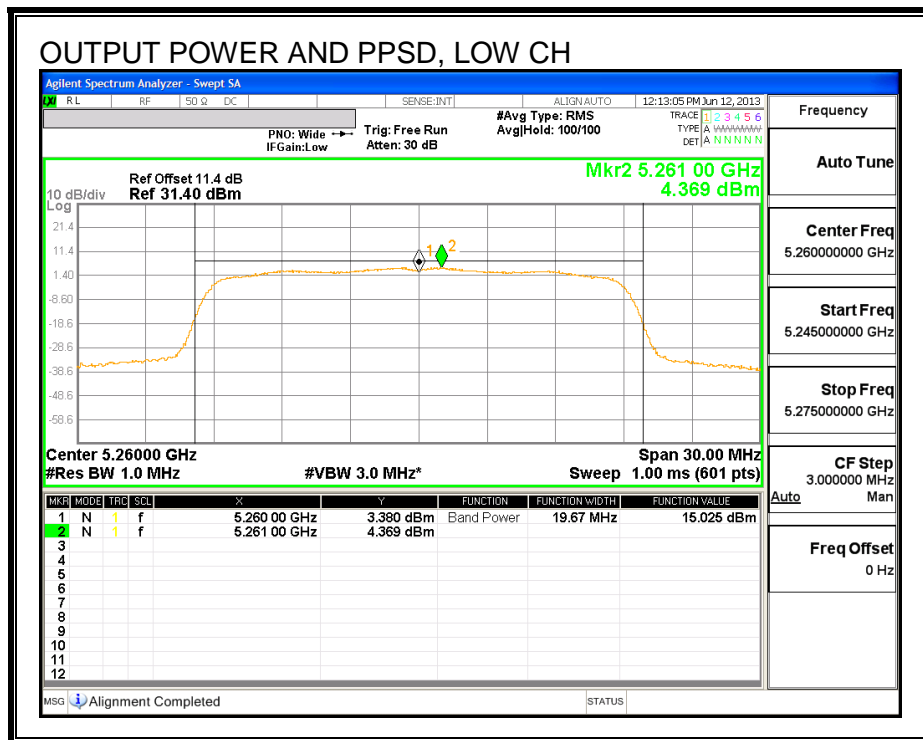

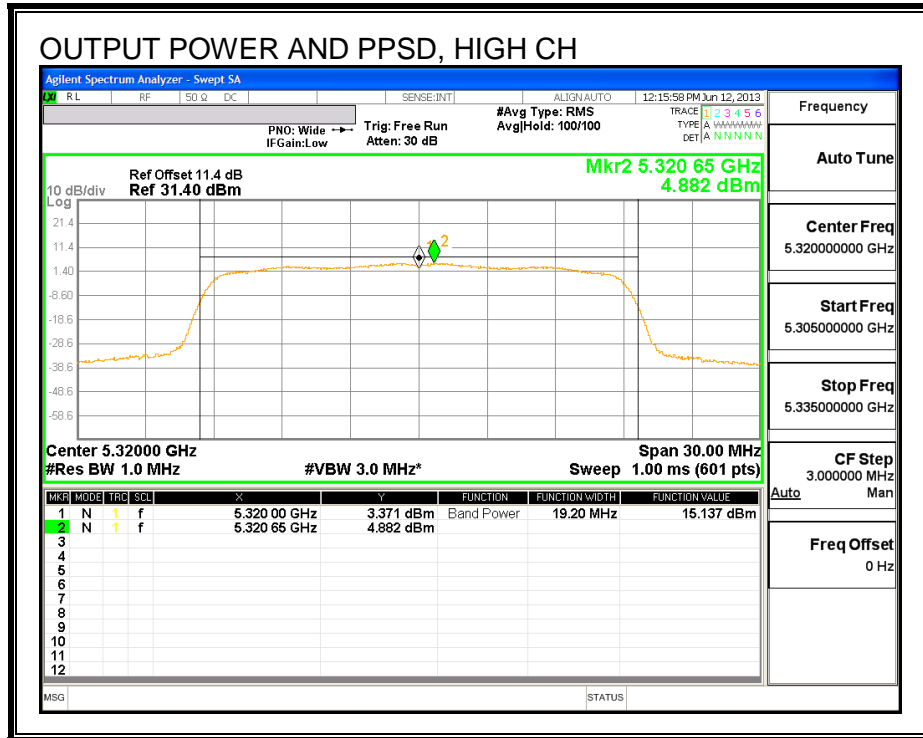

8.6. 802.11n HT40 MODE IN THE 5.3 GHZ BAND

8.6.1. 26 dB BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	43.87
High	5310	43.98

26 dB BANDWIDTH

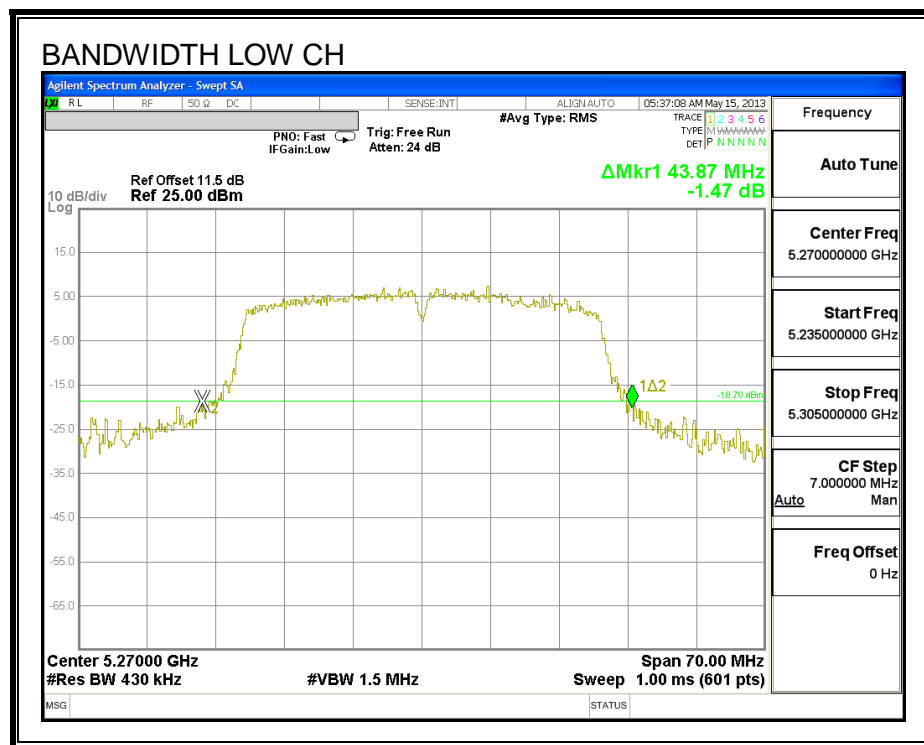

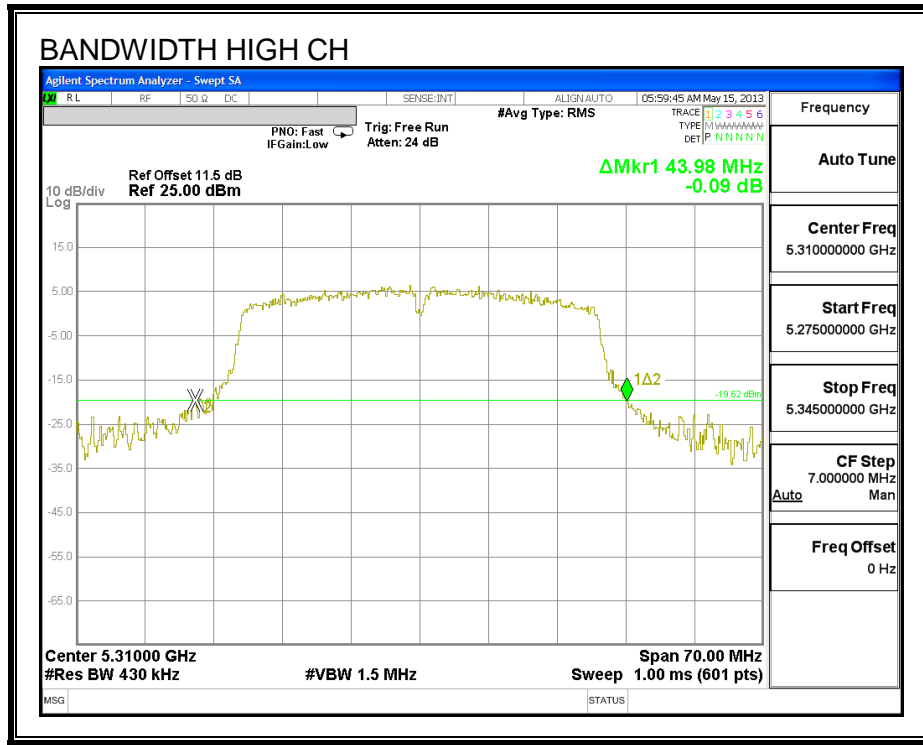

8.6.2. 99% BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	35.834
High	5310	35.999

99% BANDWIDTH

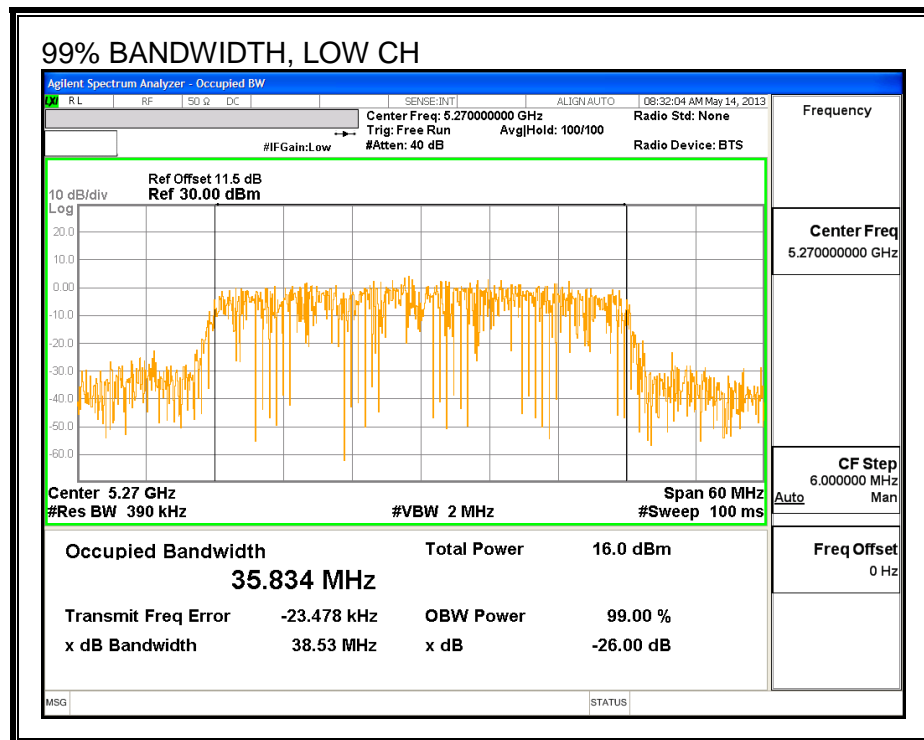

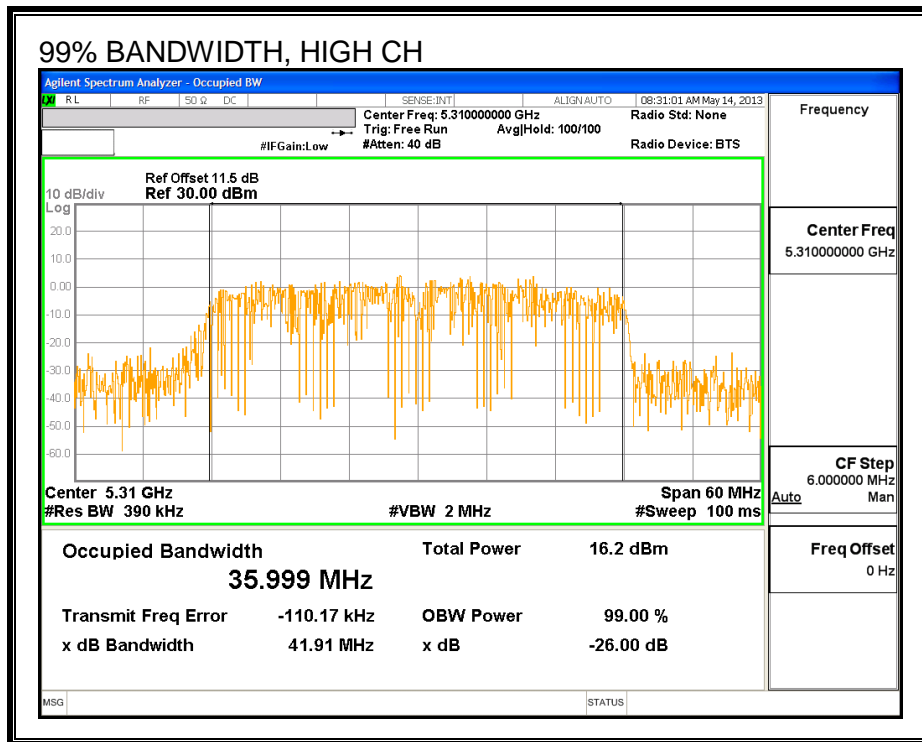

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	15.15
High	5310	14.92

8.6.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5270	43.9	-5.83
High	5310	44.0	-5.83

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5270	24.00	11.00
High	5310	24.00	11.00

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.181	15.40	24.00	-8.60
High	5310	15.001	15.22	24.00	-8.78

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5270	1.67	1.89	11.00	-9.11
High	5310	1.45	1.67	11.00	-9.33

OUTPUT POWER AND PPSD,

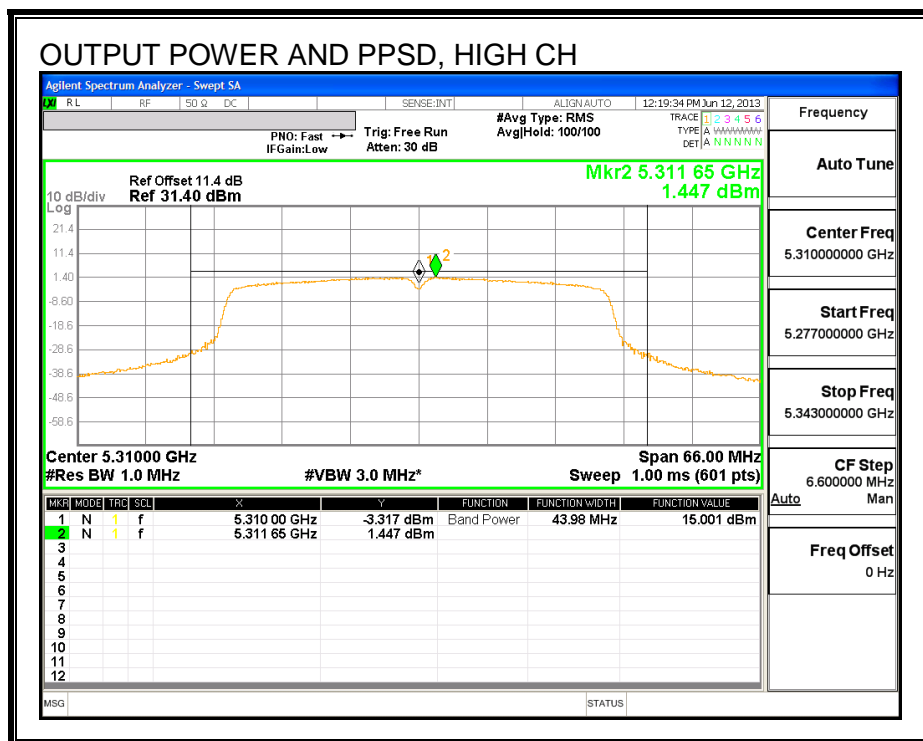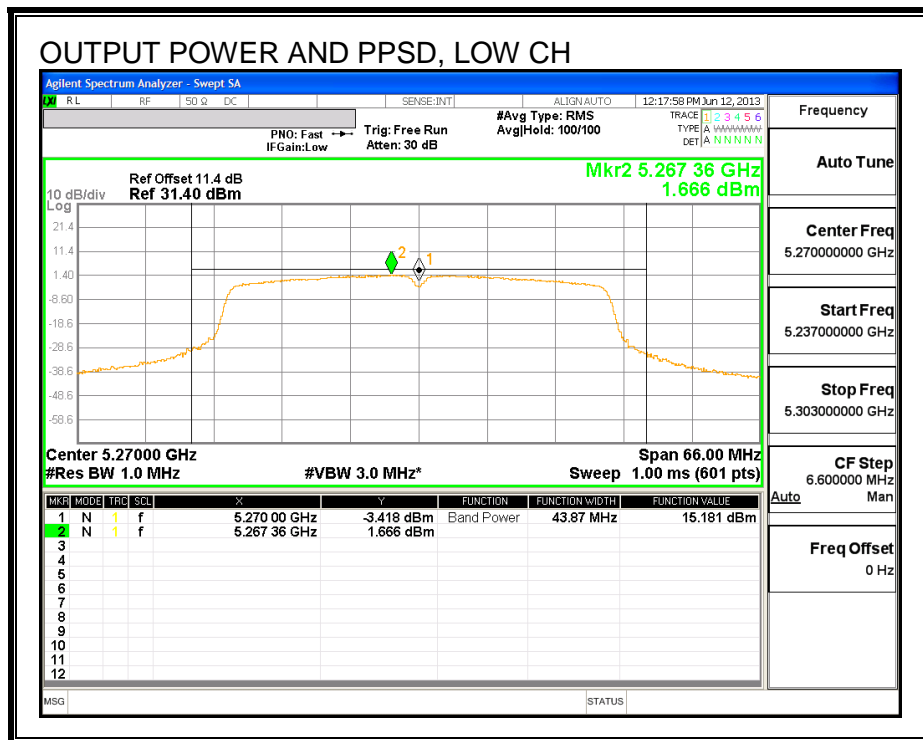

8.7. 802.11a MODE IN THE 5.6 GHz BAND

8.7.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	18.93
Mid	5580	18.73
High	5700	19.36

26 dB BANDWIDTH

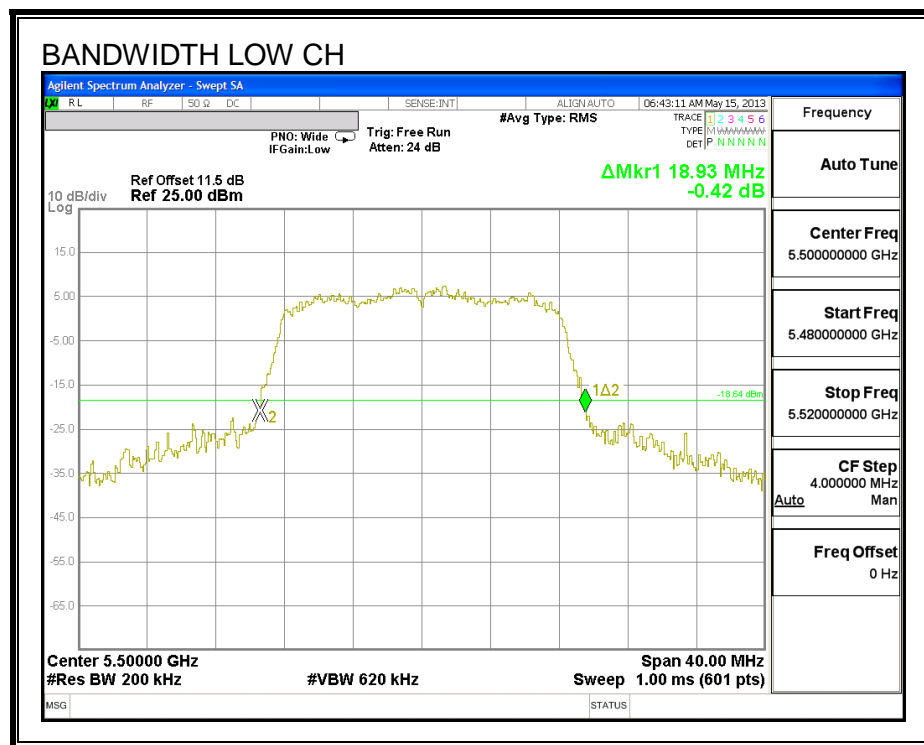

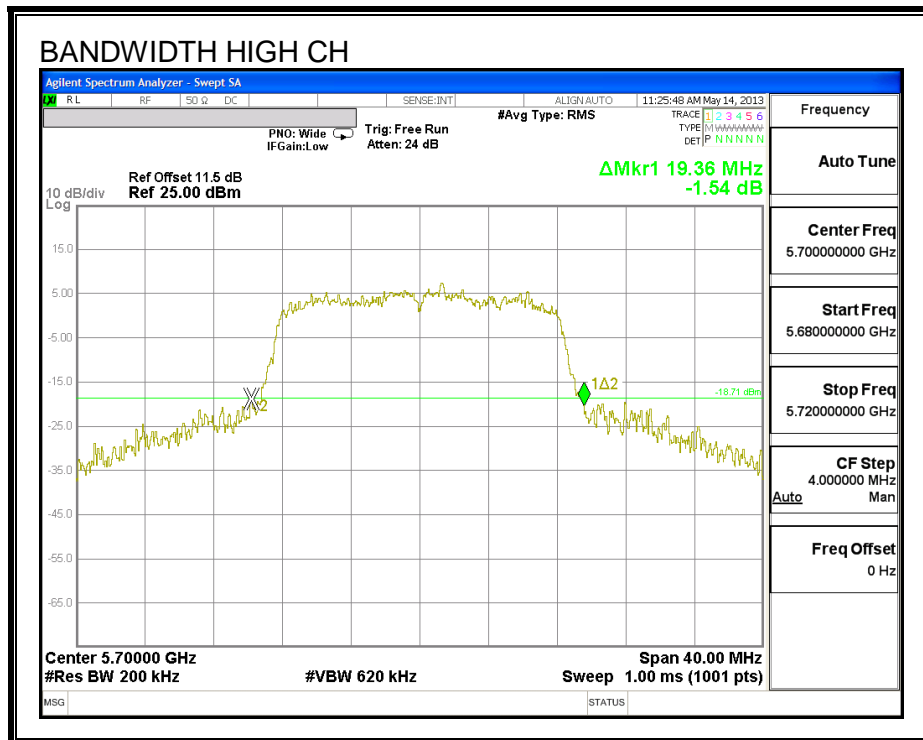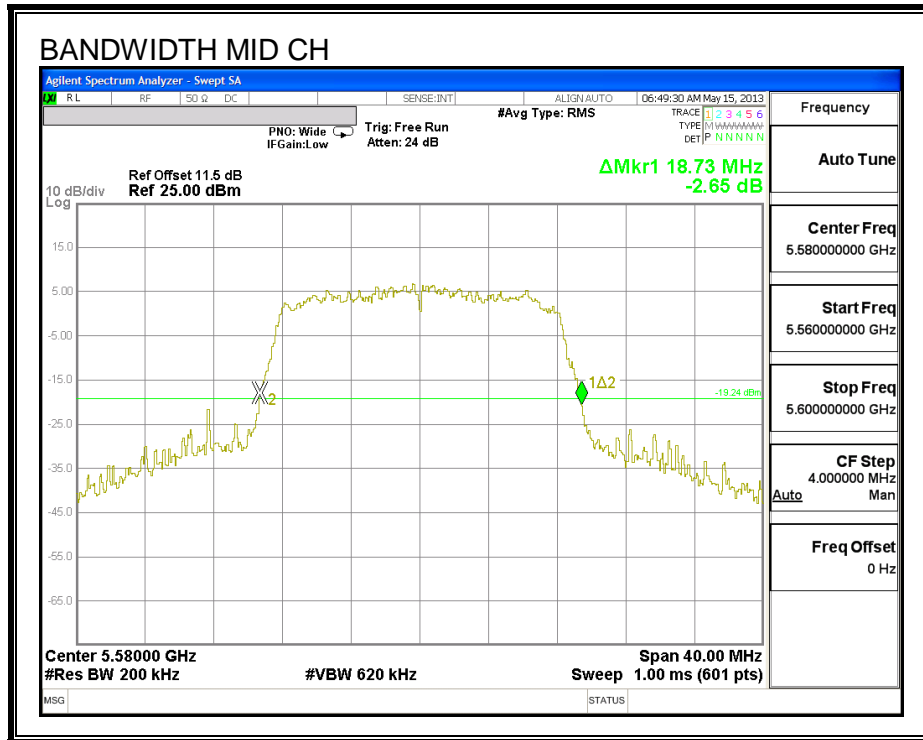

8.7.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.334
Mid	5580	16.290
High	5700	16.286

99% BANDWIDTH

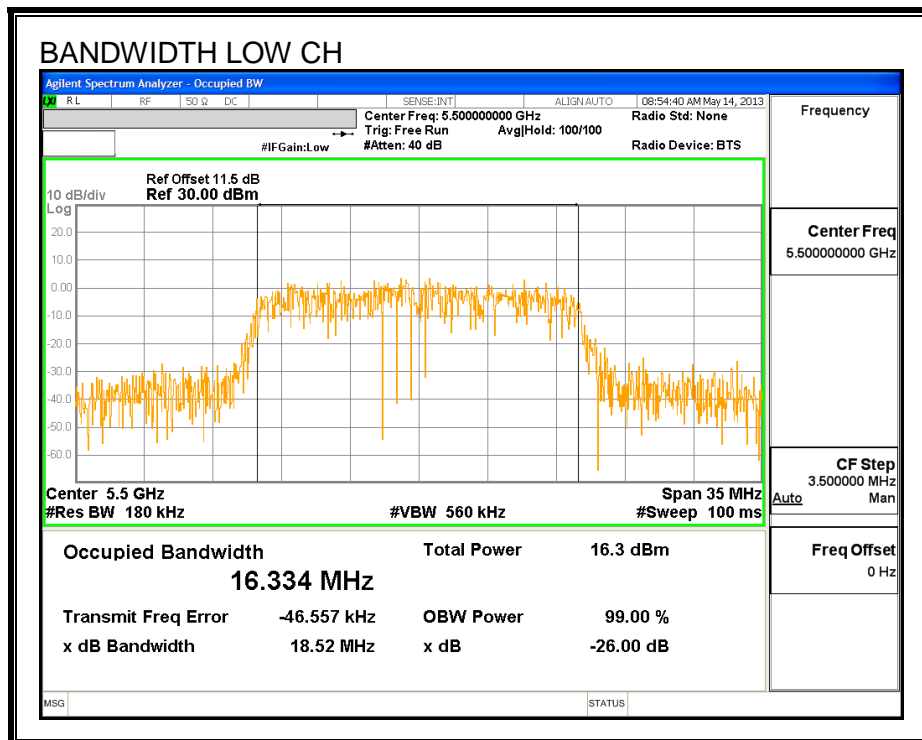

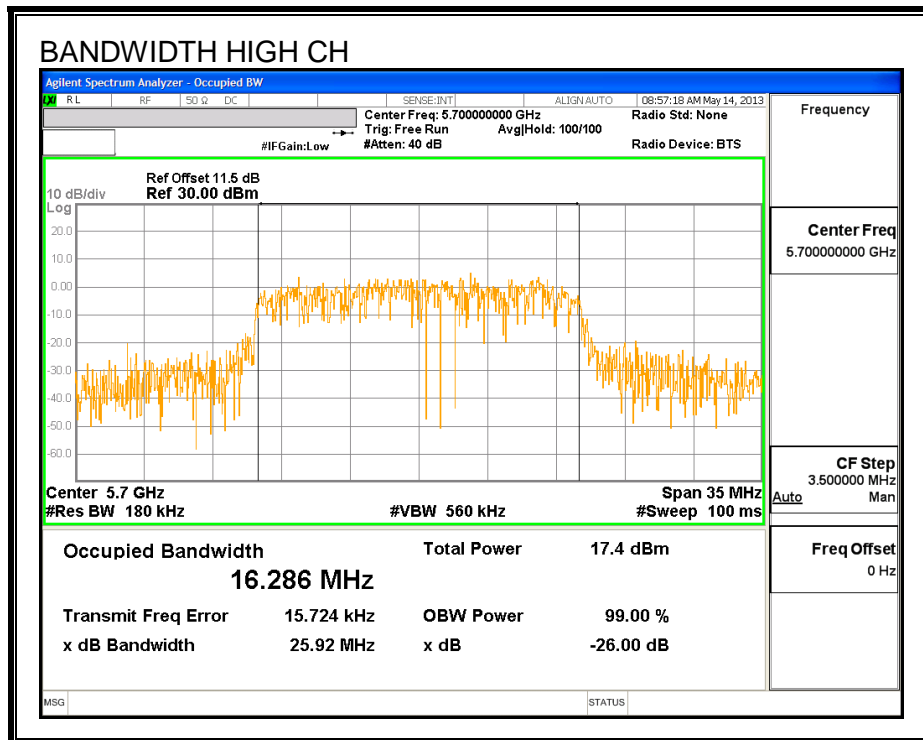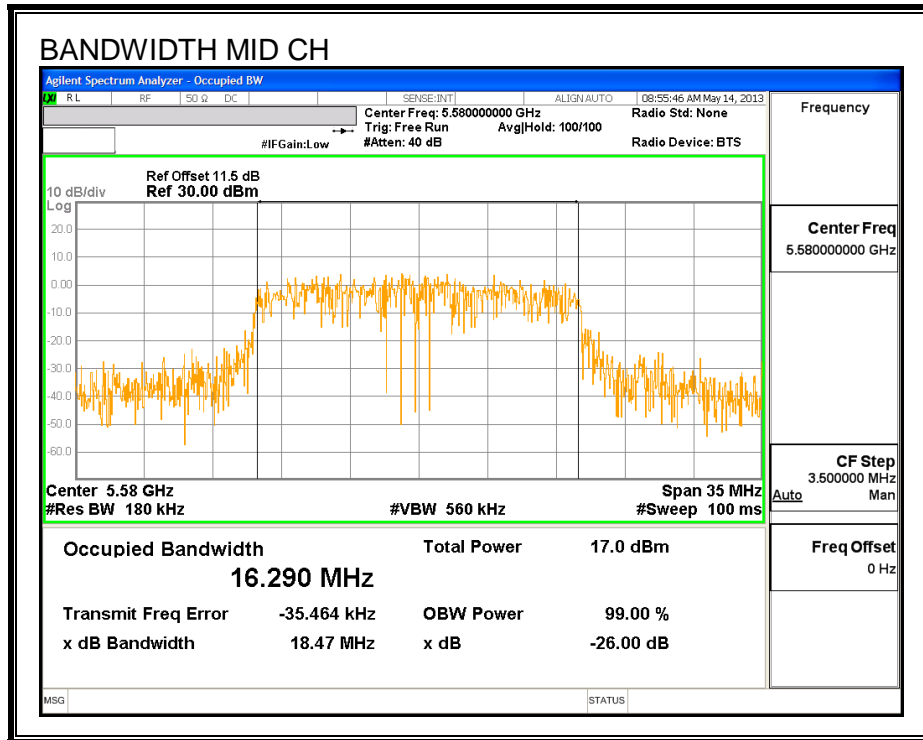

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	15.47
Mid	5580	15.25
High	5700	15.44

8.7.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5500	18.9	-4.25
Mid	5580	18.7	-4.25
High	5700	19.4	-4.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5500	23.77	11.00
Mid	5580	23.73	11.00
High	5700	23.87	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	15.62	15.62	23.77	-8.16
Mid	5580	15.29	15.29	23.73	-8.43
High	5700	15.45	15.45	23.87	-8.42

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	5.60	5.60	11.00	-5.40
Mid	5580	5.26	5.26	11.00	-5.74
High	5700	5.52	5.52	11.00	-5.48

OUTPUT POWER AND PPSD

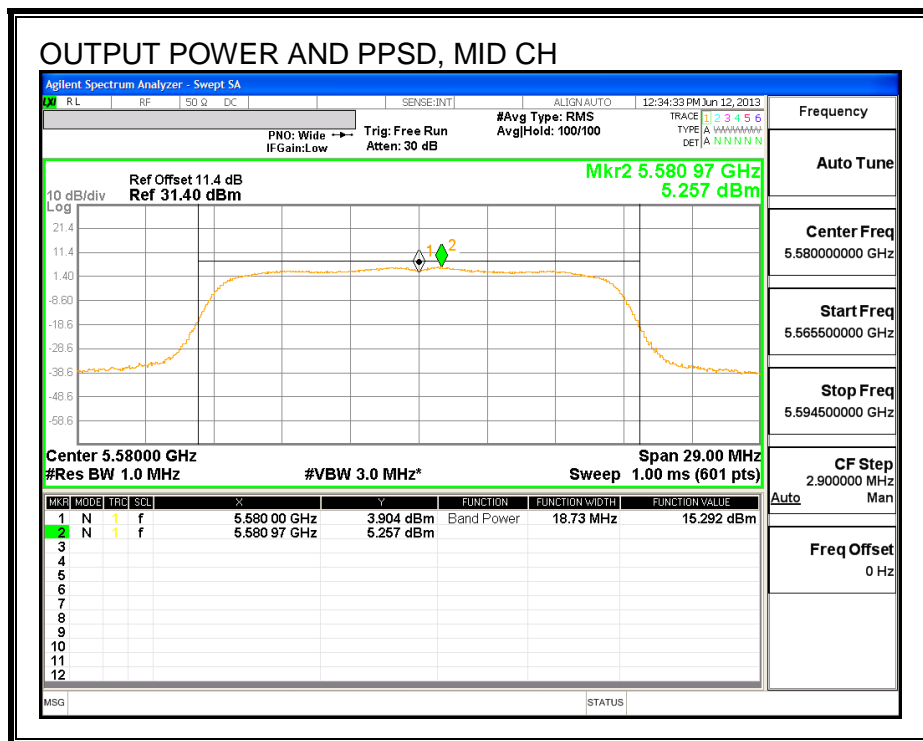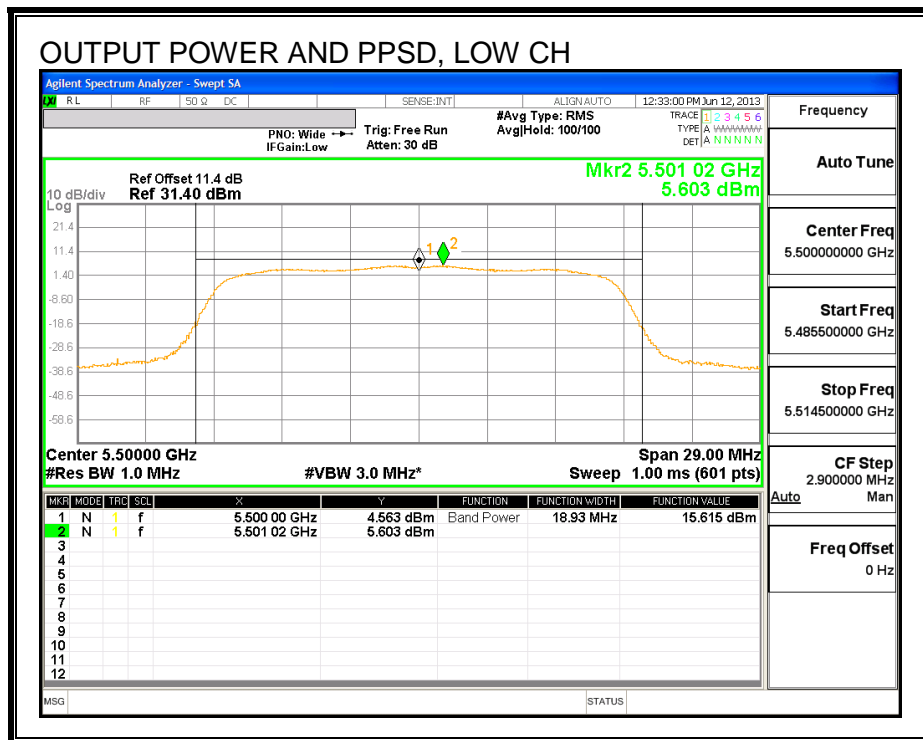

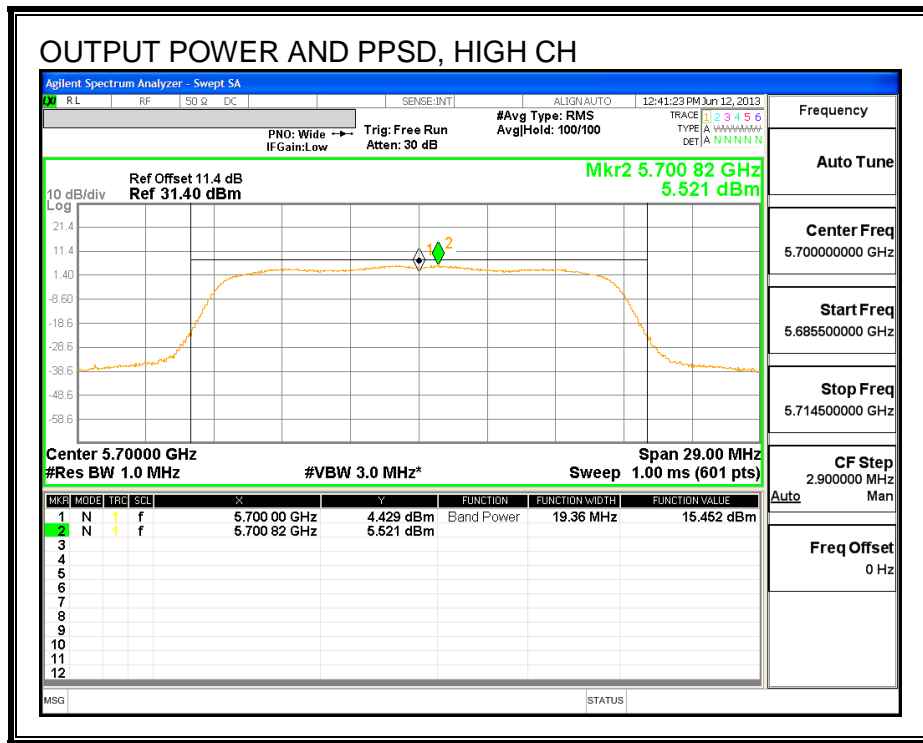

8.8. 802.11n HT20 MODE IN THE 5.6 GHz BAND

8.8.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	19.00
Mid	5580	19.27
High	5700	19.00

26 dB BANDWIDTH

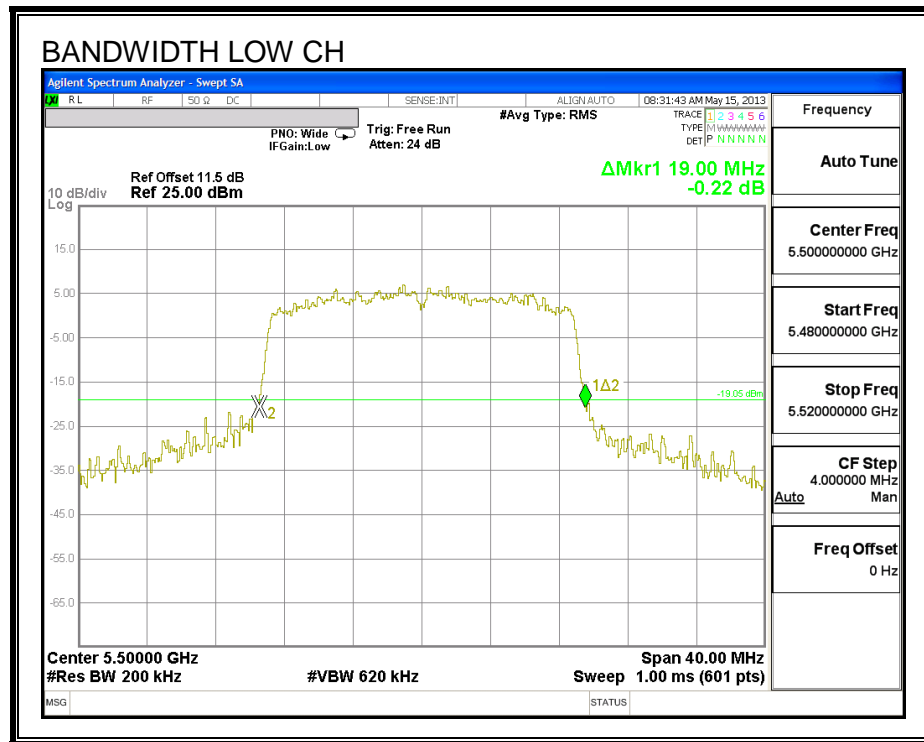

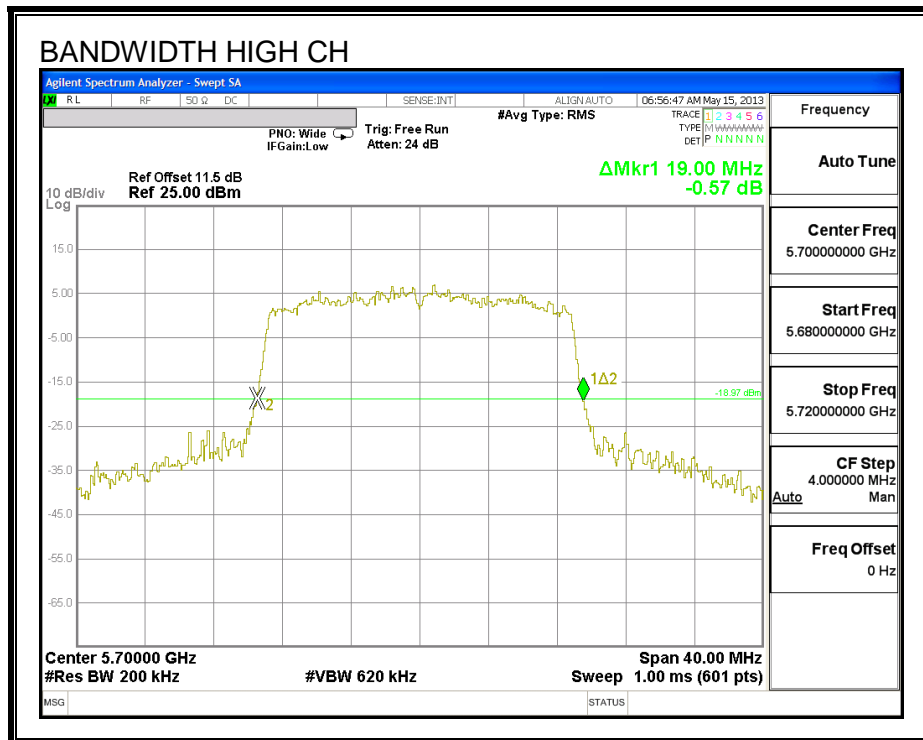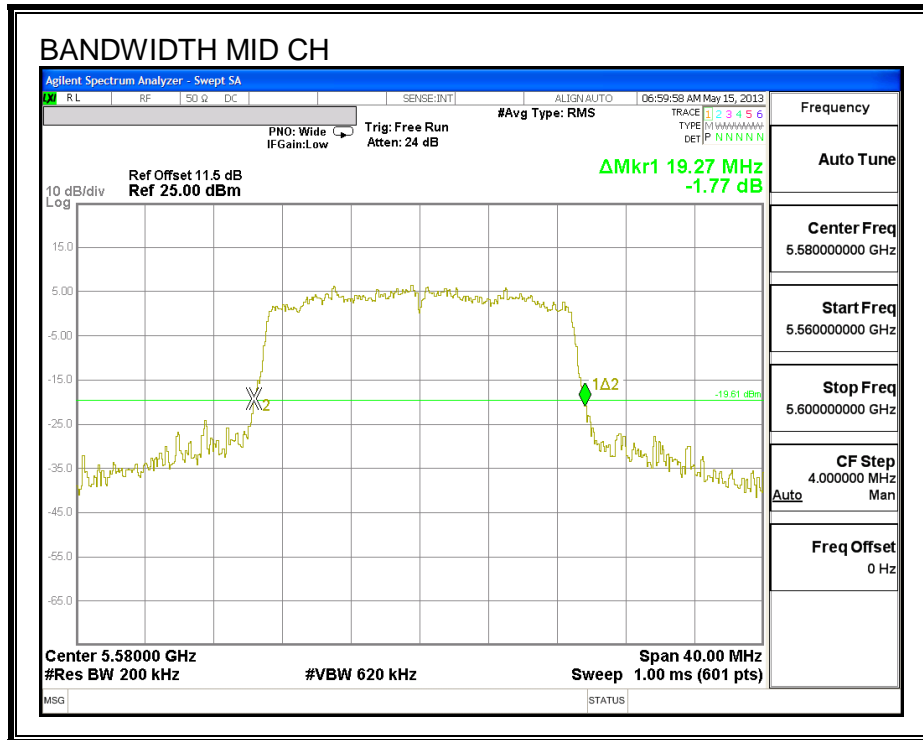

8.8.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.494
Mid	5580	17.550
High	5700	17.604

99% BANDWIDTH

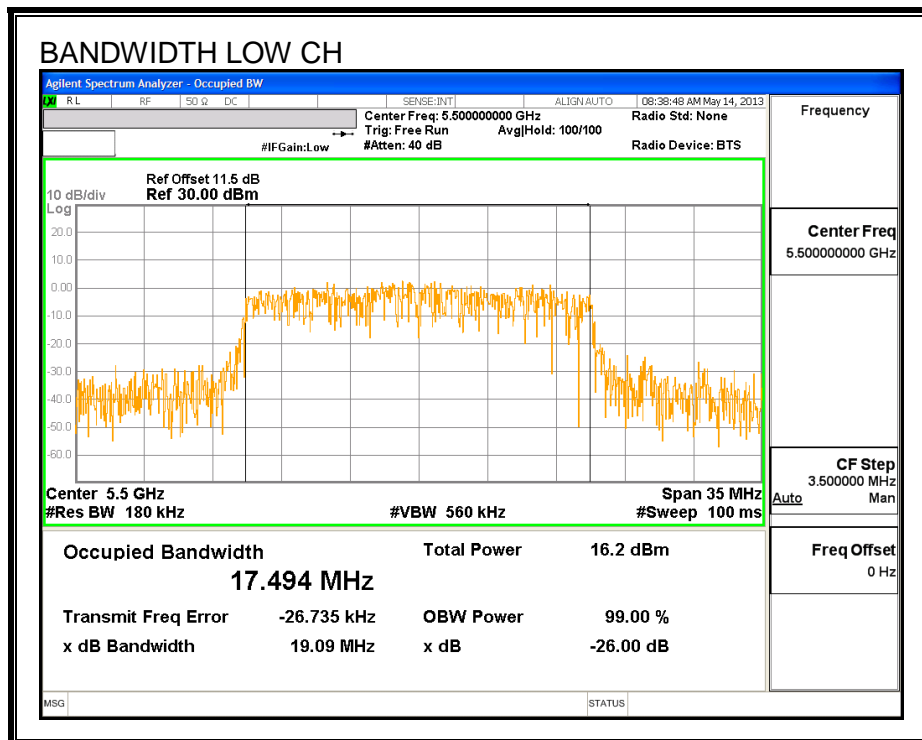

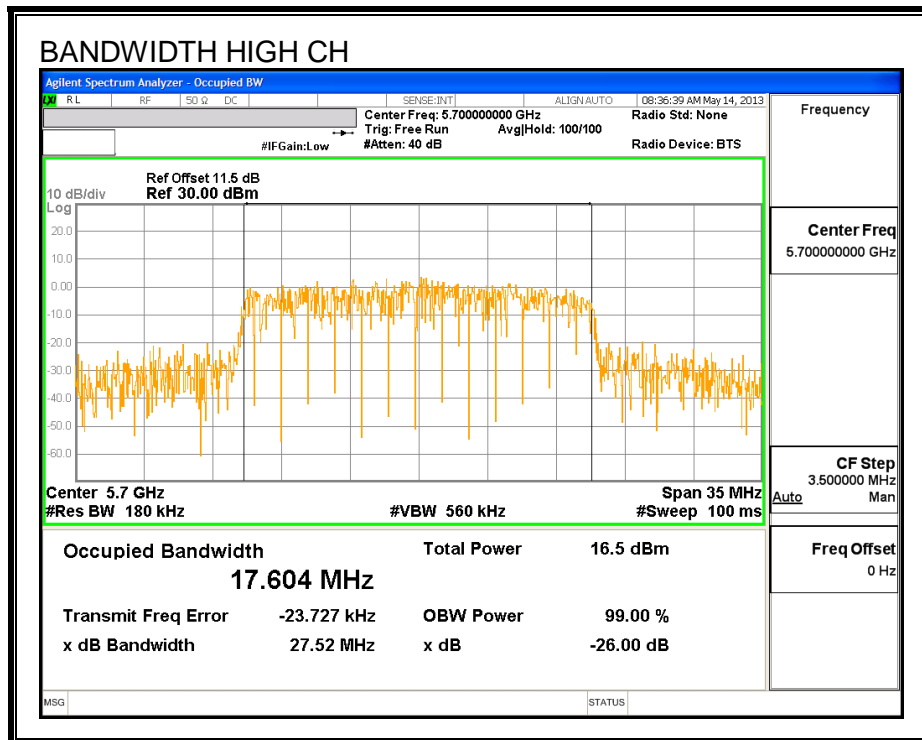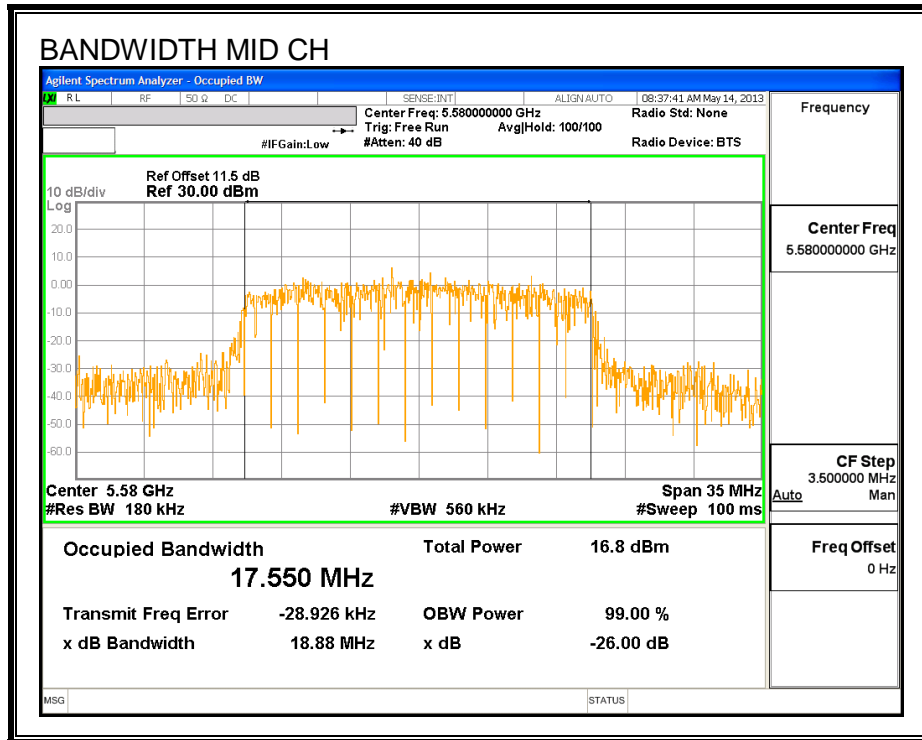

8.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	15.55
Mid	5580	15.44
High	5700	15.40

8.8.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5500	19.0	-4.25
Mid	5580	19.3	-4.25
High	5700	19.0	-4.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5500	23.79	11.00
Mid	5580	23.85	11.00
High	5700	23.79	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	15.567	15.57	23.79	-8.22
Mid	5580	15.566	15.57	23.85	-8.28
High	5700	15.527	15.53	23.79	-8.26

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	5.279	5.28	11.00	-5.72
Mid	5580	5.197	5.20	11.00	-5.80
High	5700	5.281	5.28	11.00	-5.72

OUTPUT POWER AND PPSD

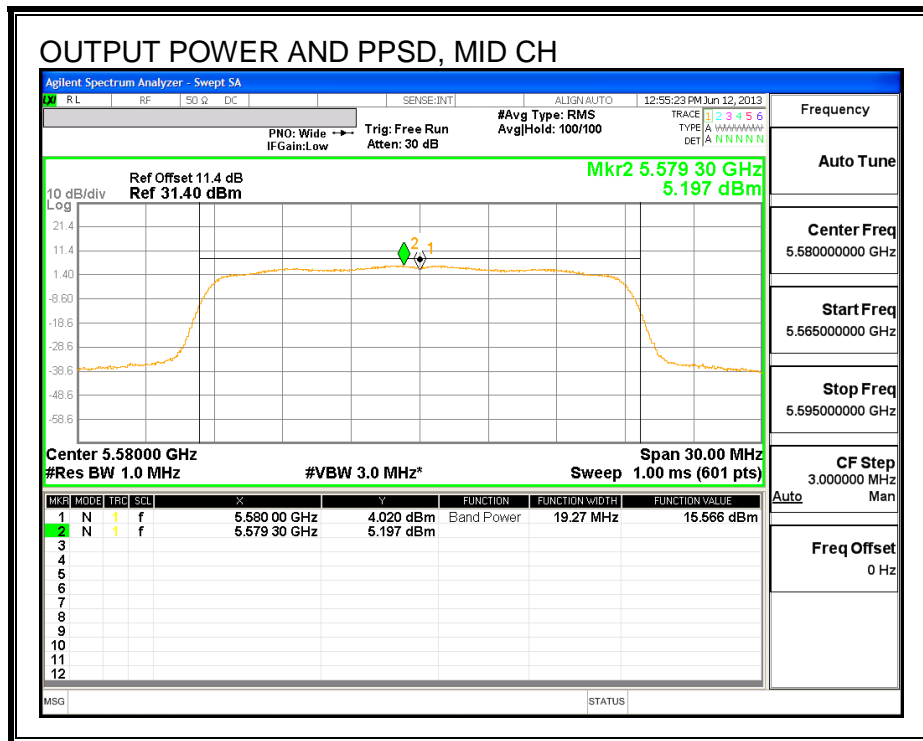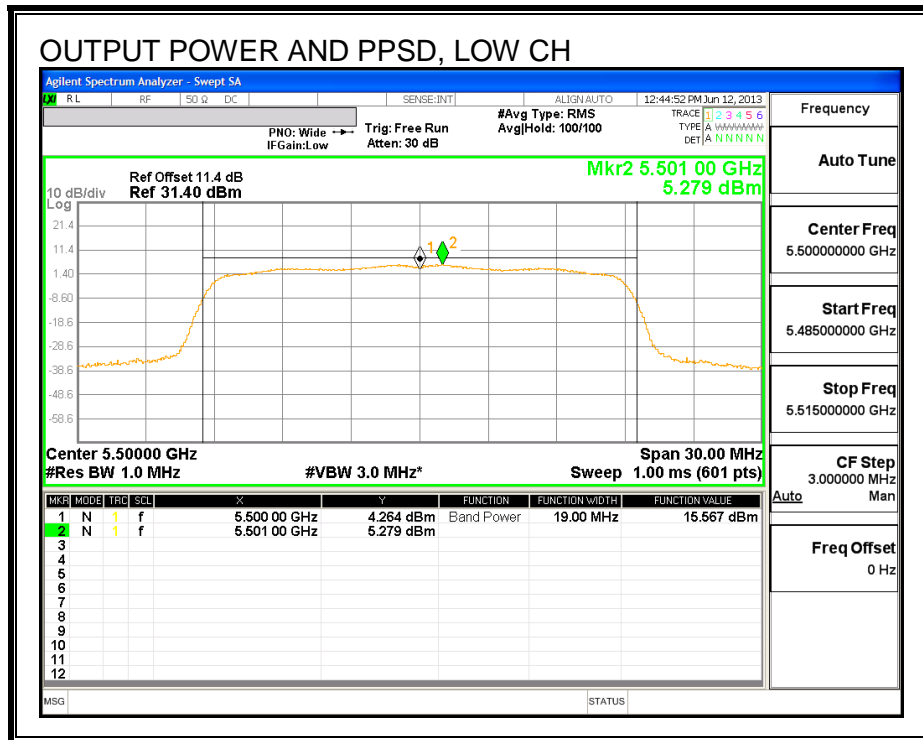

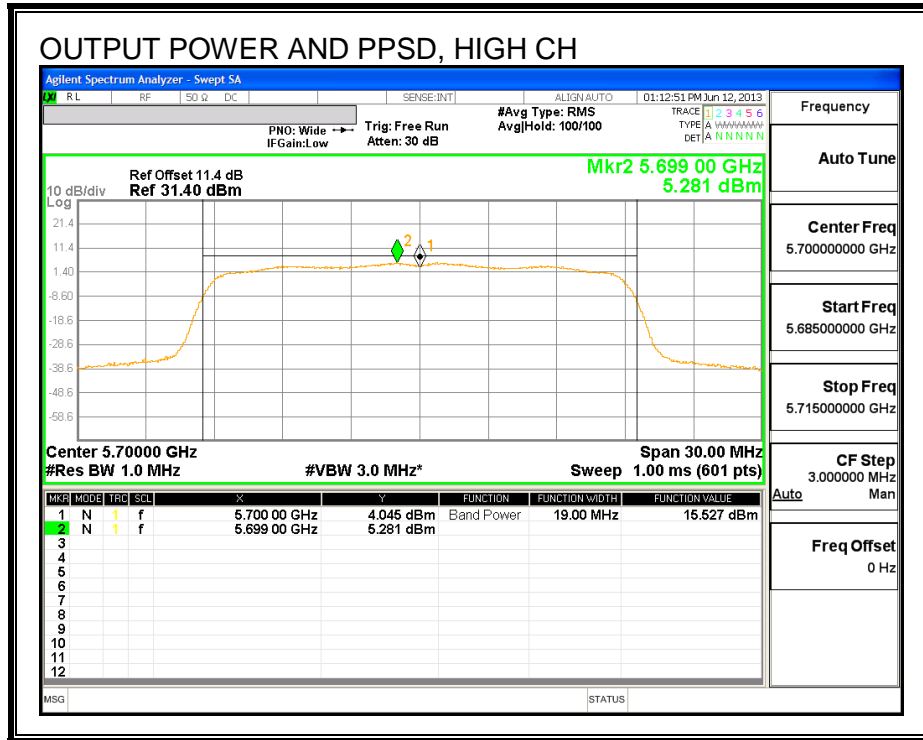

8.9. 802.11n HT40 MODE IN THE 5.6 GHz BAND

8.9.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	42.70
Mid	5550	43.05
High	5670	41.88

26 dB BANDWIDTH

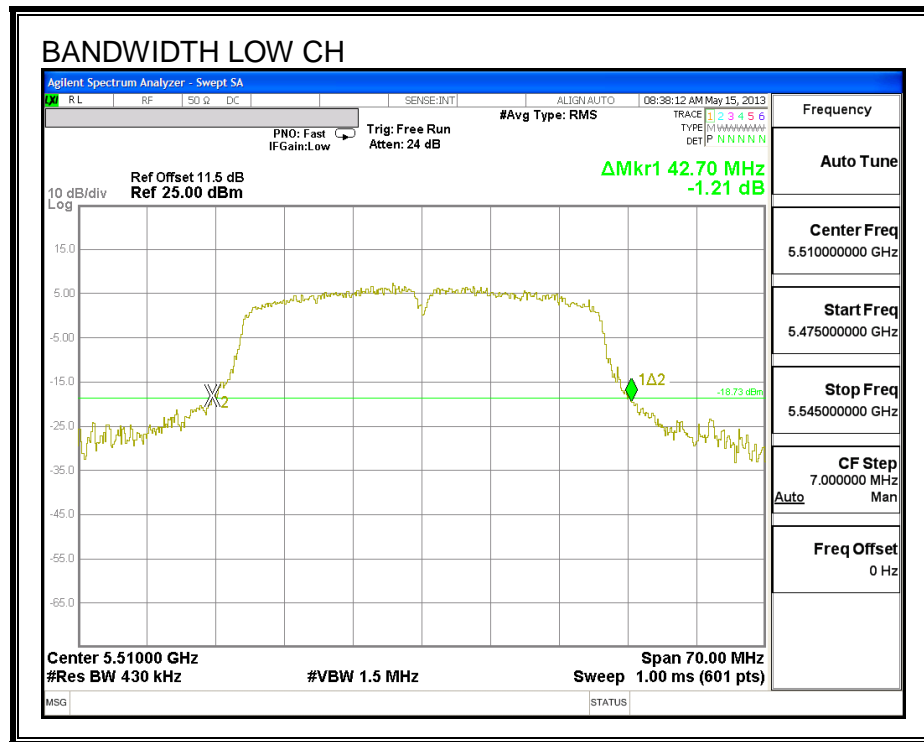

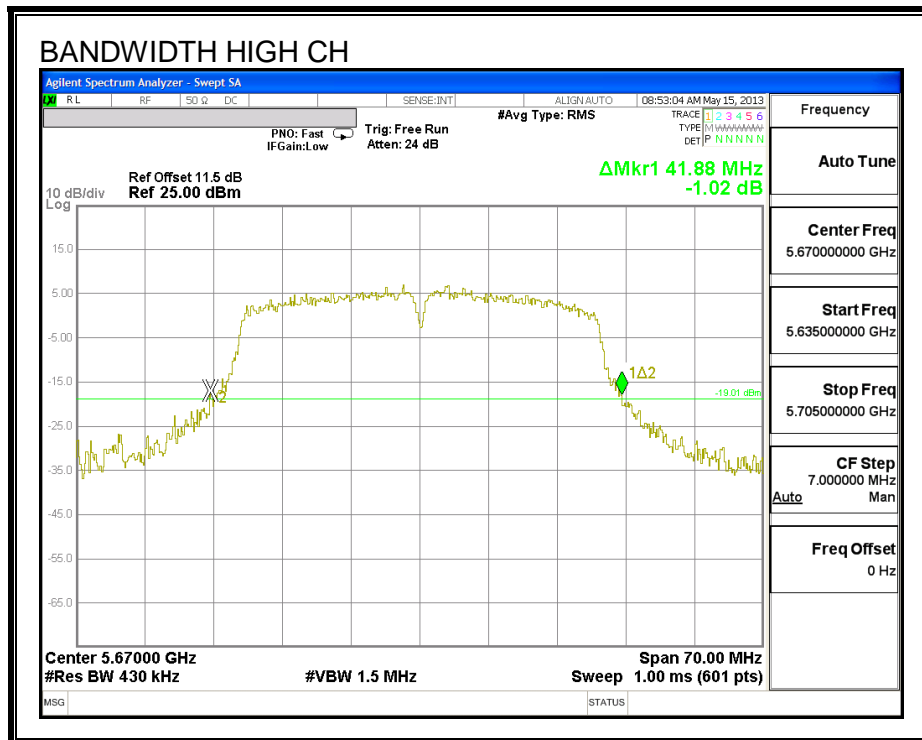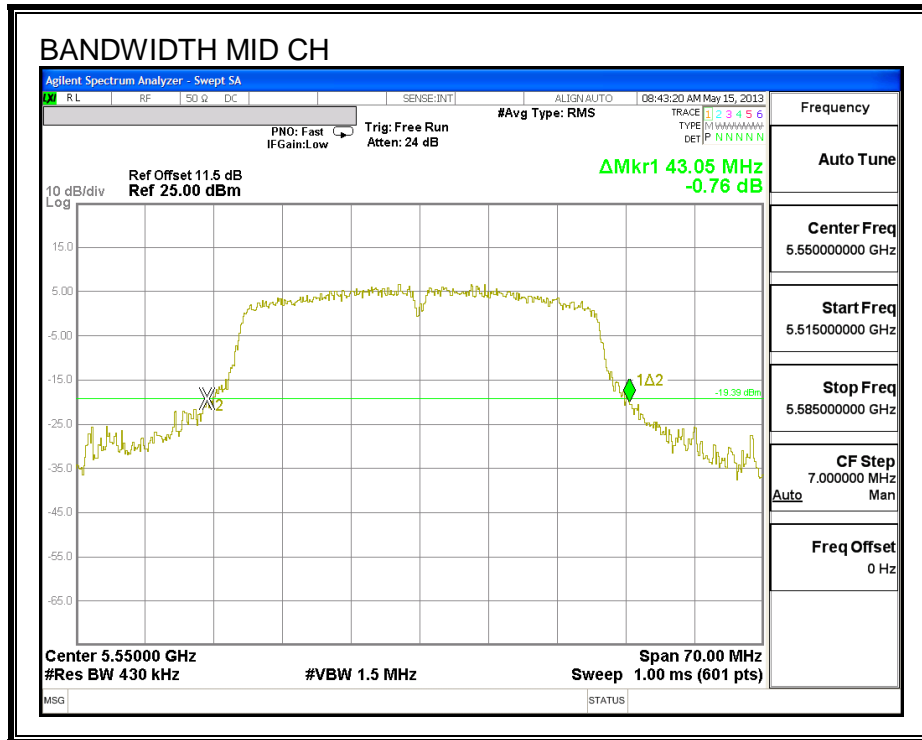

8.9.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	35.650
Mid	5550	35.807
High	5670	35.931

99% BANDWIDTH

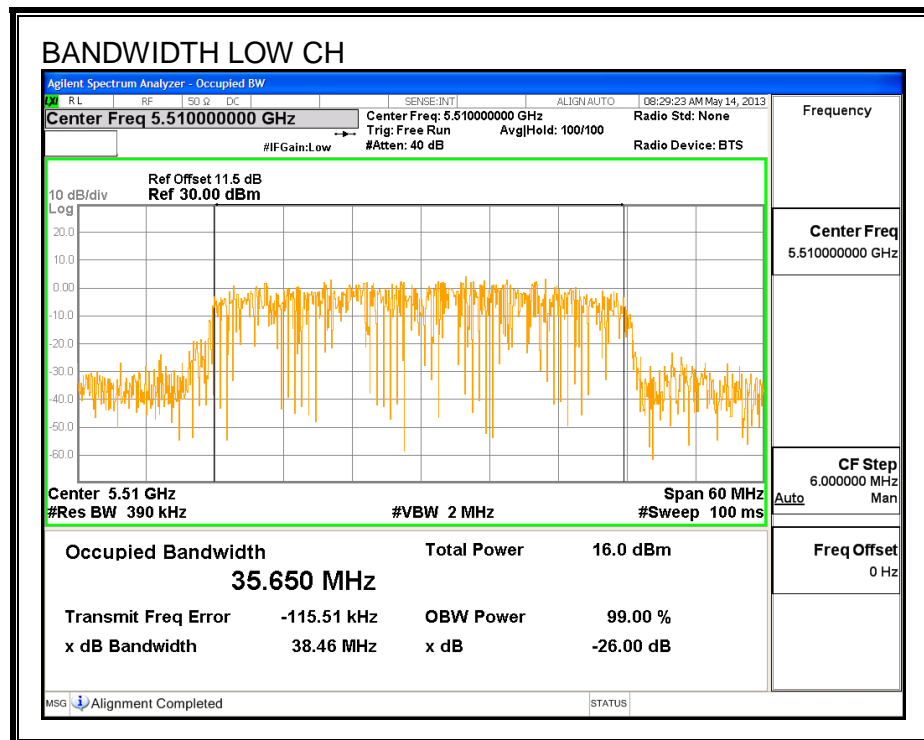

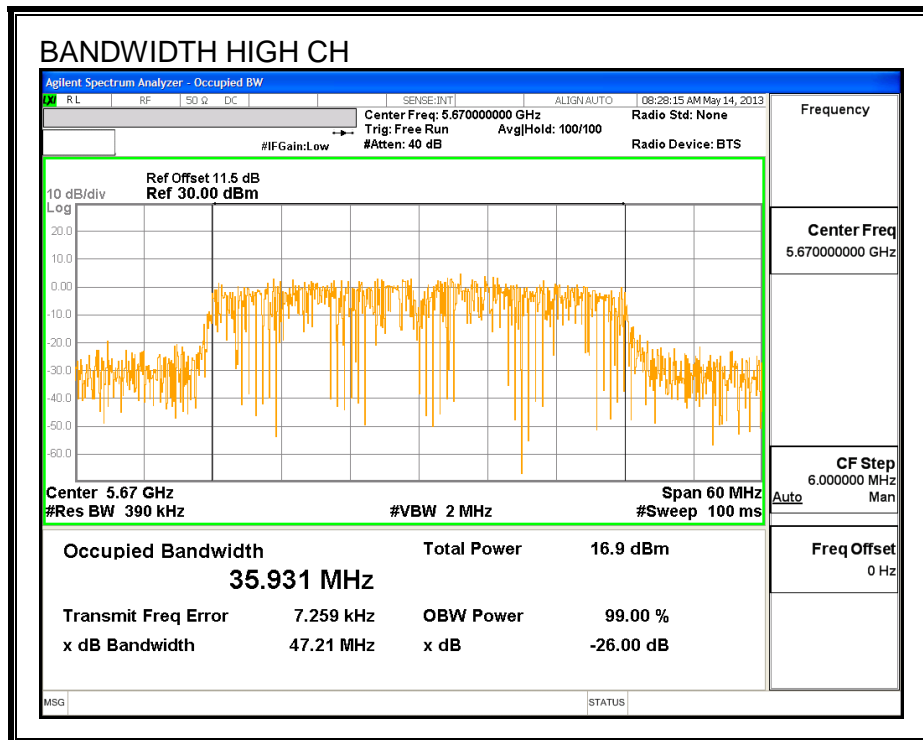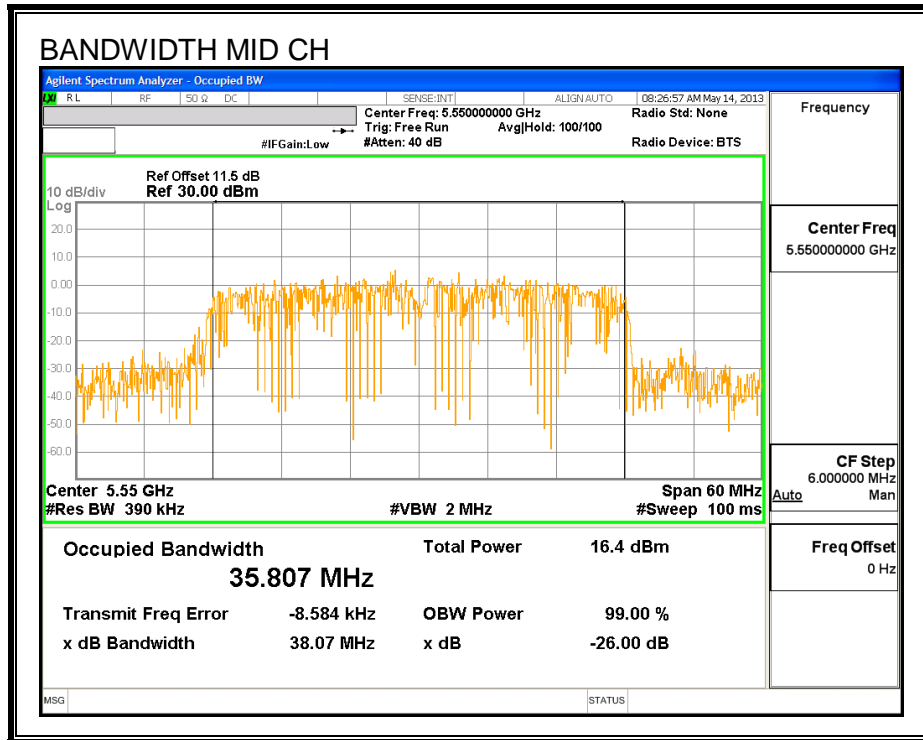

8.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 11.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5510	15.50
Mid	5550	15.55
High	5670	15.46

8.9.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5510	42.7	-4.25
Mid	5550	43.1	-4.25
High	5670	41.9	-4.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	FCC PPSD Limit (dBm)
Low	5510	24.00	11.00
Mid	5550	24.00	11.00
High	5670	24.00	11.00

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.563	15.78	24.00	-8.22
Mid	5550	15.592	15.81	24.00	-8.19
High	5670	15.510	15.73	24.00	-8.27

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5510	1.860	2.08	11.00	-8.92
Mid	5550	1.953	2.17	11.00	-8.83
High	5670	1.870	2.09	11.00	-8.91

OUTPUT POWER AND PPSD

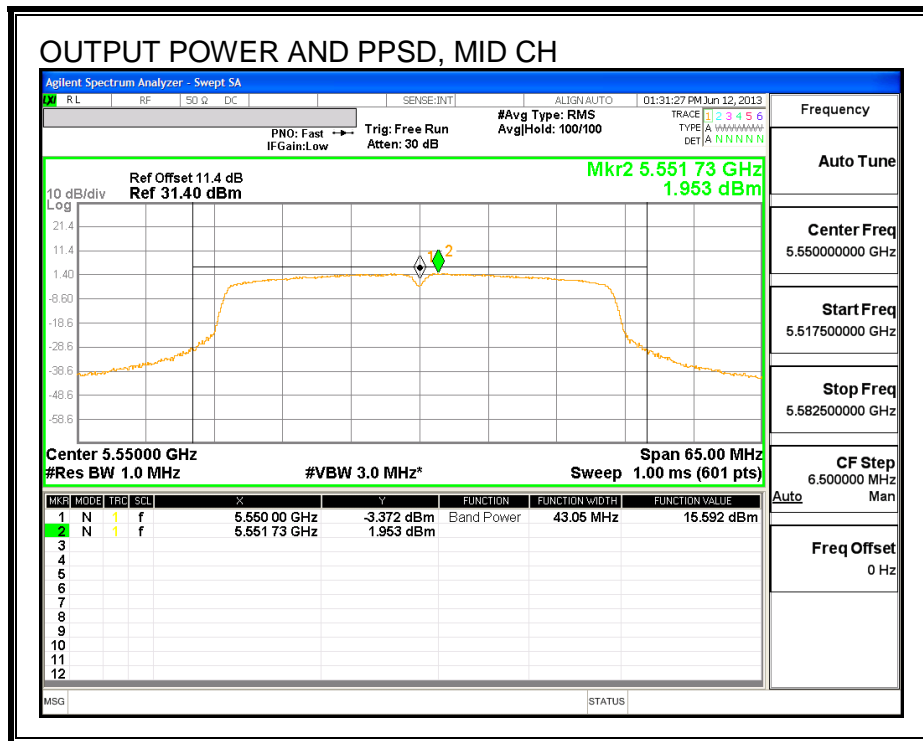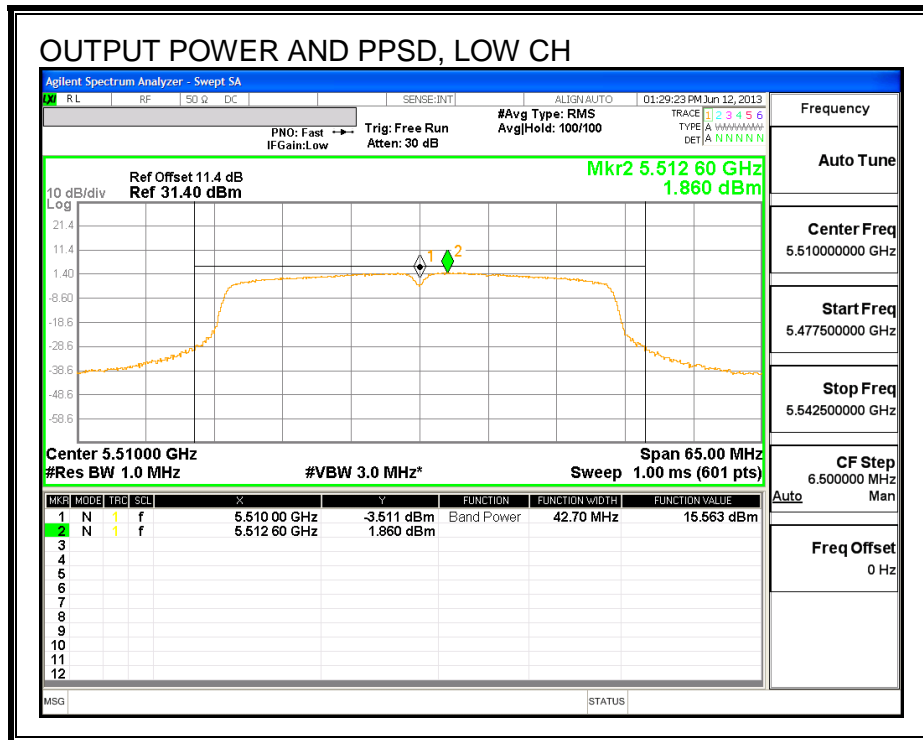

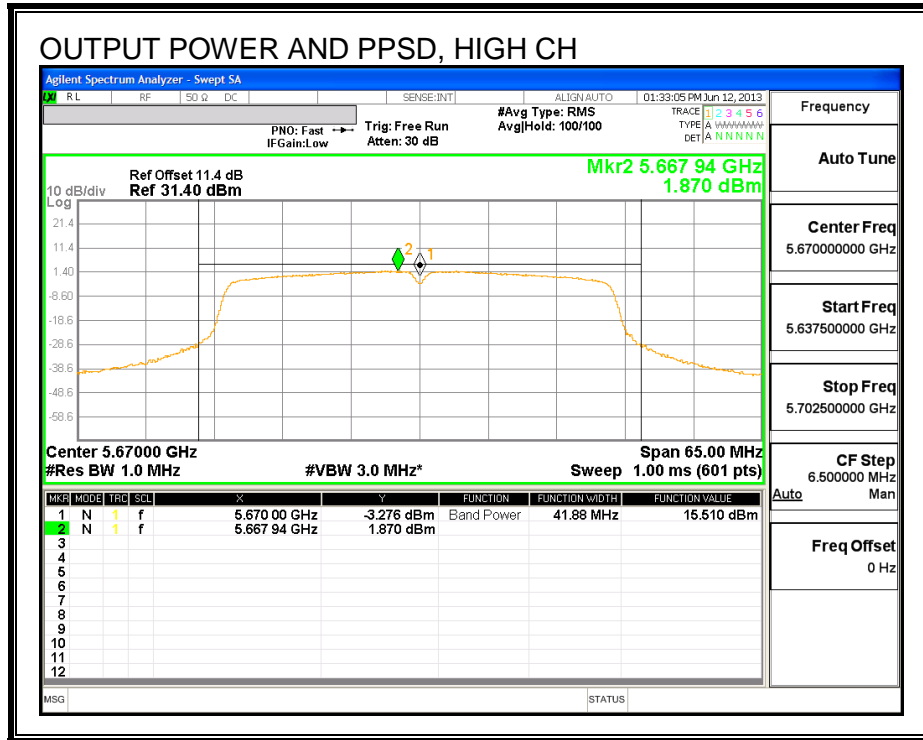

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 1 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



TEST RESULT



No other spurious emissions were found above 18G.

9.2. TRANSMITTER ABOVE 1 GHz


9.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

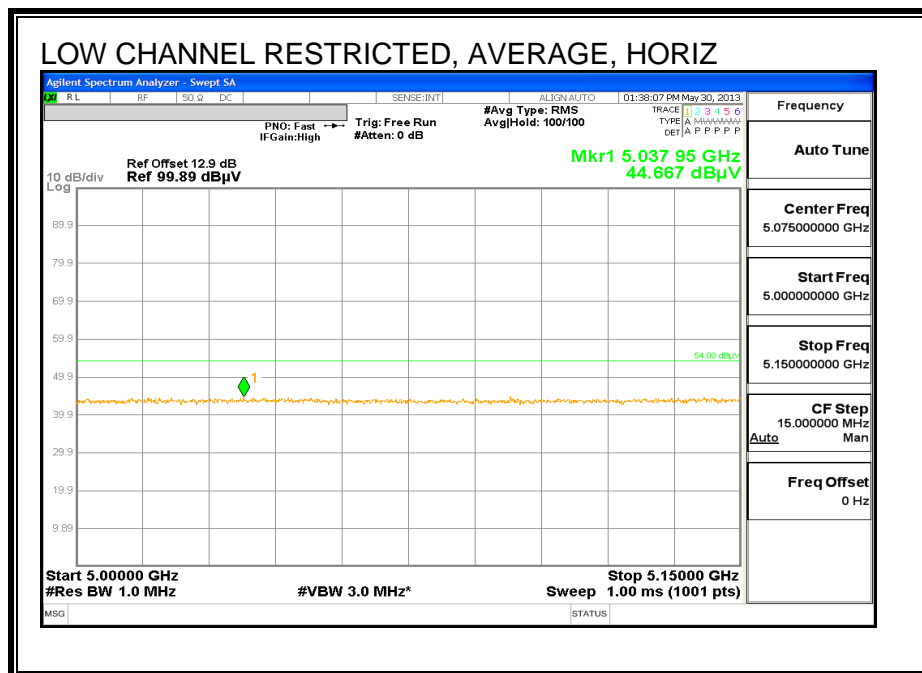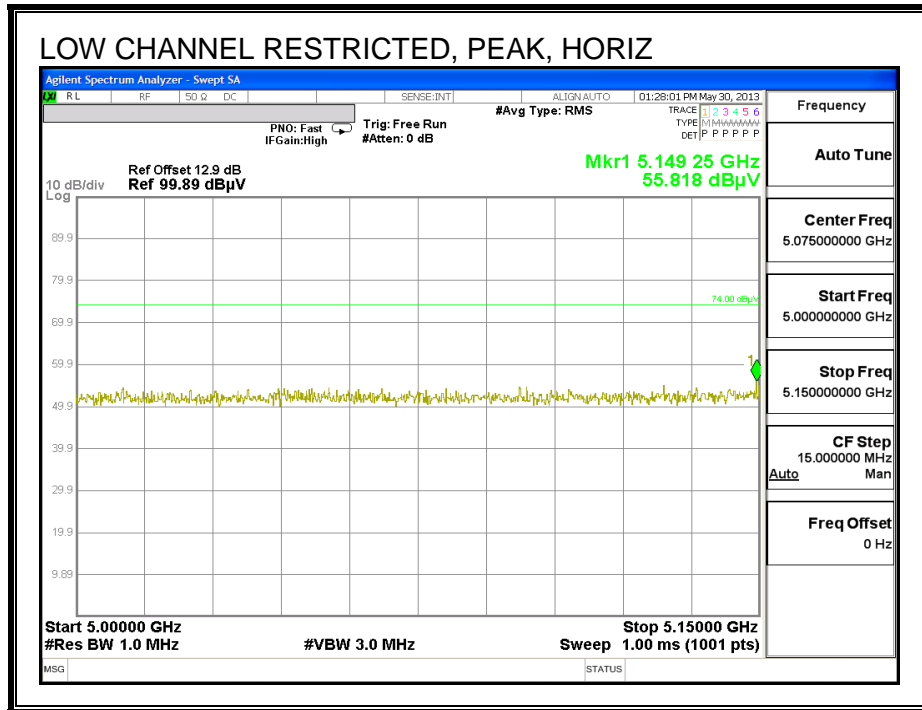


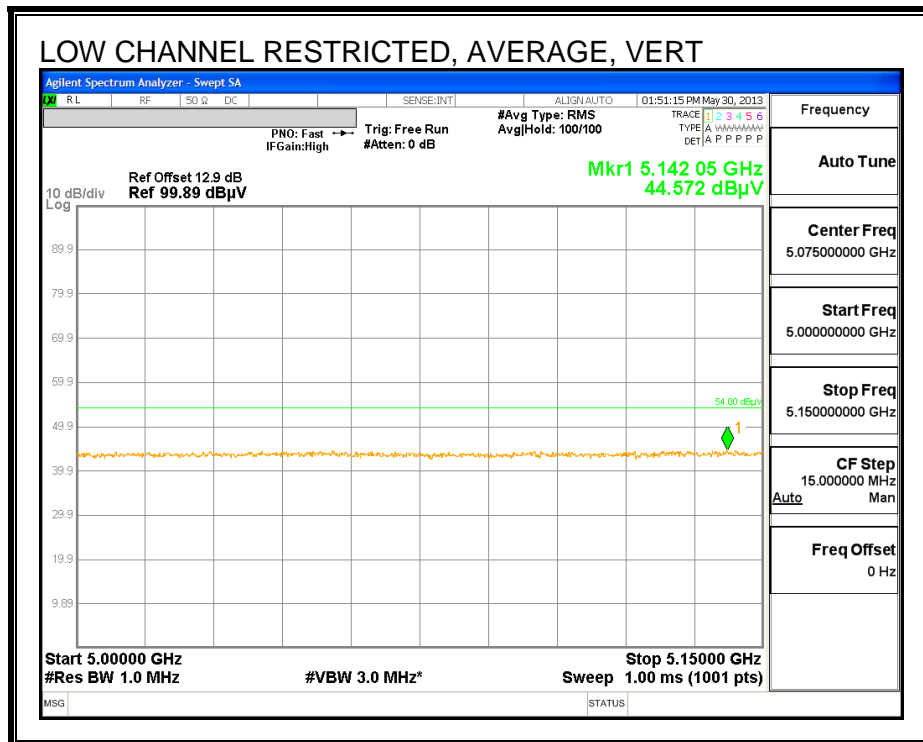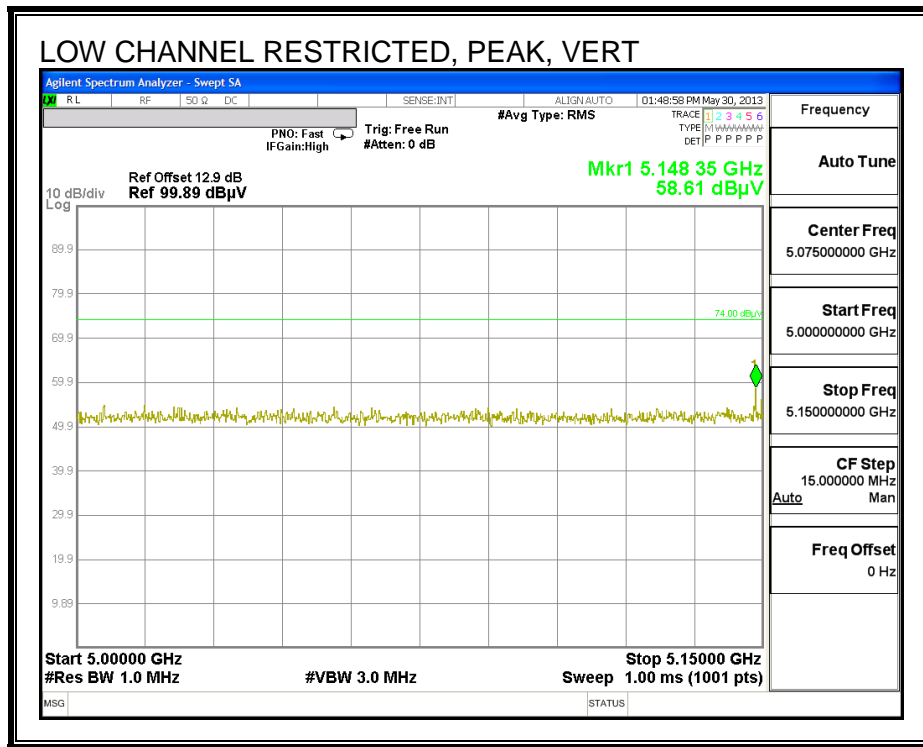

HARMONICS AND SPURIOUS EMISSIONS

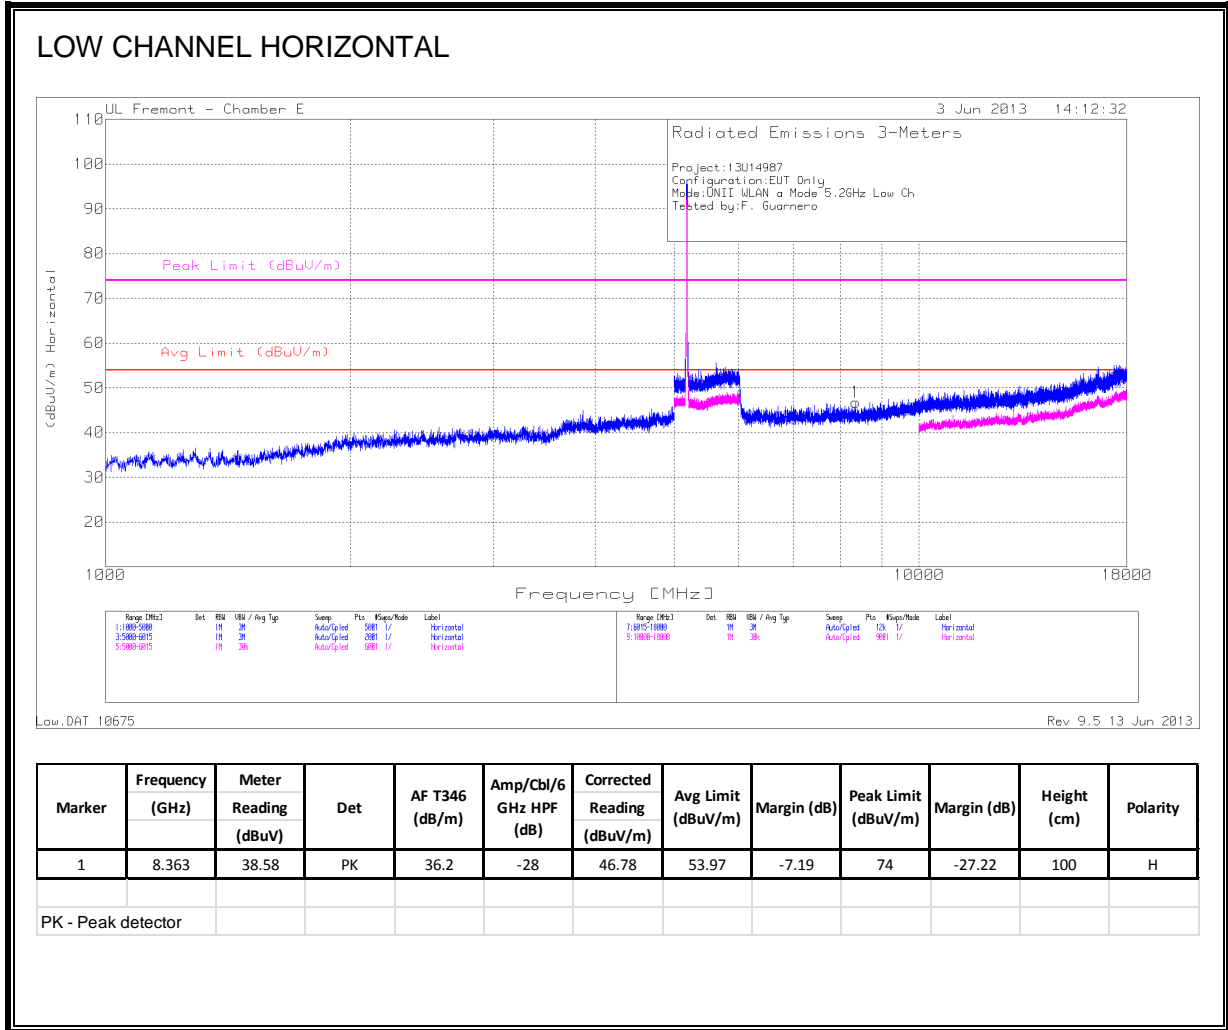

LOW CHANNEL VERTICAL

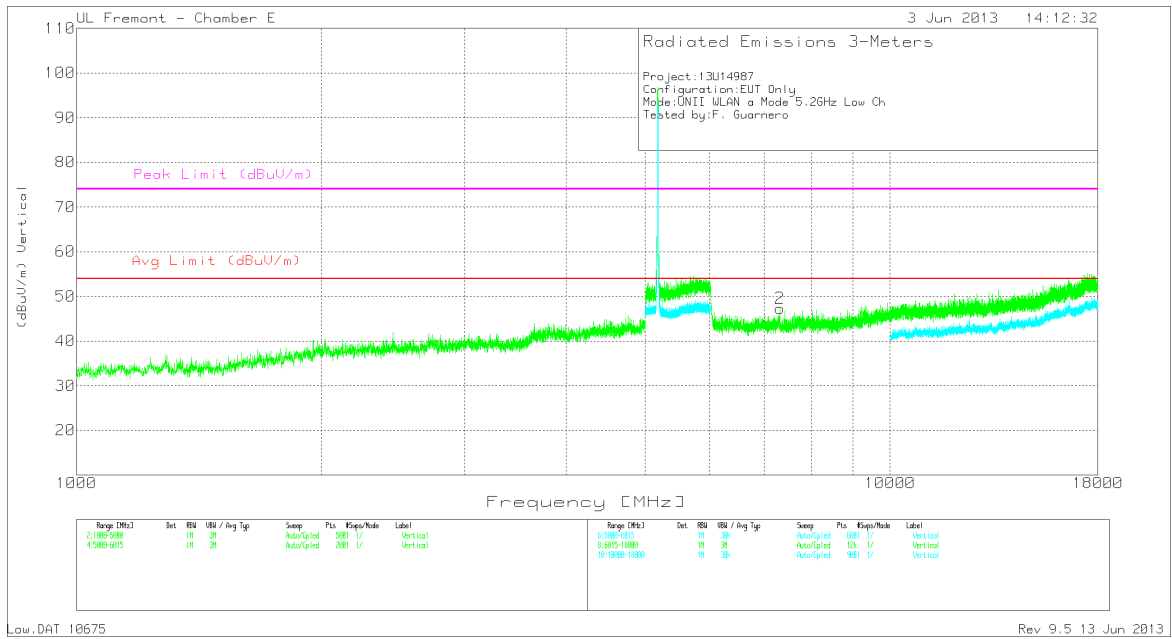

Marker	Frequency (GHz)	Meter	Det	AF T346 (dB/m)	Amp/Cbl/6 GHz HPF (dB)	Corrected	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarity
		Reading (dBuV)				Reading (dBuV/m)						
2	7.324	39.79	PK	36	-28.5	47.29	53.97	-6.68	74	-26.71	100	V
PK - Peak detector												

