



**FCC 47 CFR PART 15 SUBPART E**

**CERTIFICATION TEST REPORT**

**FOR**

**CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS**

**MODEL NUMBER: A1634, A1687, A1690 AND A1699**

**FCC ID: BCG-E2944A**

**REPORT NUMBER: 15U20162-E5, REVISION A**

**ISSUE DATE: JULY 27, 2015**

*Prepared for*

**APPLE, INC.**

**1 INFINITE LOOP**

**CUPERTINO, CA 95014, U.S.A.**

*Prepared by*

**UL VERIFICATION SERVICES INC.**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 771-1000**

**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	07/24/2015	Initial Issue	M. Mekuria
A	07/27/2015	Address TCB's Questions	C. Pang

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>11</b>
<b>2. TEST METHODOLOGY .....</b>	<b>12</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>12</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>13</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	13
4.2. SAMPLE CALCULATION.....	13
4.3. MEASUREMENT UNCERTAINTY .....	13
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>14</b>
5.1. DESCRIPTION OF EUT.....	14
5.2. MAXIMUM OUTPUT POWER.....	14
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	16
5.4. SOFTWARE AND FIRMWARE .....	16
5.5. WORST-CASE CONFIGURATION AND MODE.....	17
5.6. DESCRIPTION OF TEST SETUP .....	18
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>22</b>
<b>7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS .....</b>	<b>23</b>
7.1. ON TIME AND DUTY CYCLE.....	23
7.2. MEASUREMENT METHODS.....	27
<b>8. ANTENNA PORT TEST RESULTS (MODEL: A1634).....</b>	<b>28</b>
8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND.....	28
8.1.1. 26 dB BANDWIDTH .....	28
8.1.2. 99% BANDWIDTH.....	31
8.1.3. AVERAGE POWER.....	34
8.1.4. OUTPUT POWER AND PSD .....	35
8.2. 802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND.....	39
8.2.1. 26 dB BANDWIDTH .....	39
8.2.2. 99% BANDWIDTH.....	42
8.2.3. AVERAGE POWER.....	45
8.2.4. OUTPUT POWER AND PSD .....	46
8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND .....	50
8.3.1. 26 dB BANDWIDTH .....	50
8.3.2. 99% BANDWIDTH.....	54
8.3.3. AVERAGE POWER.....	58
8.3.4. OUTPUT POWER AND PSD .....	59
8.4. 802.11n HT20 2Tx STBC MODE IN THE 5.2 GHz BAND.....	65
8.5. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND.....	66
8.5.1. 26 dB BANDWIDTH .....	66

8.5.2.	99% BANDWIDTH.....	68
8.5.3.	AVERAGE POWER.....	70
8.5.4.	OUTPUT POWER AND PSD .....	71
8.6.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND</i> .....	74
8.6.1.	26 dB BANDWIDTH .....	74
8.6.2.	99% BANDWIDTH.....	76
8.6.3.	AVERAGE POWER.....	78
8.6.4.	OUTPUT POWER AND PSD .....	79
8.7.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	82
8.7.1.	26 dB BANDWIDTH .....	82
8.7.2.	99% BANDWIDTH.....	85
8.7.3.	AVERAGE POWER.....	88
8.7.4.	OUTPUT POWER AND PSD .....	89
8.8.	<i>802.11n HT40 2Tx STBC MODE IN THE 5.2 GHz BAND</i> .....	94
8.9.	<i>802.11ac HT80 CHAIN 0 MODE IN THE 5.2 GHz BAND</i> .....	95
8.9.1.	26 dB BANDWIDTH .....	95
8.9.2.	99% BANDWIDTH.....	97
8.9.3.	AVERAGE POWER.....	99
8.9.4.	OUTPUT POWER AND PSD .....	100
8.10.	<i>802.11ac HT80 CHAIN 1 MODE IN THE 5.2 GHz BAND</i> .....	103
8.10.1.	26 dB BANDWIDTH.....	103
8.10.2.	99% BANDWIDTH.....	104
8.10.3.	AVERAGE POWER .....	105
8.10.4.	OUTPUT POWER AND PSD .....	106
8.11.	<i>802.11ac HT80 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	109
8.11.1.	26 dB BANDWIDTH.....	109
8.11.2.	99% BANDWIDTH.....	111
8.11.3.	AVERAGE POWER .....	113
8.11.4.	OUTPUT POWER AND PSD .....	114
8.12.	<i>802.11ac HT80 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	118
8.13.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND</i> .....	119
8.13.1.	26 dB BANDWIDTH.....	119
8.13.2.	99% BANDWIDTH.....	122
8.13.3.	AVERAGE POWER.....	125
8.13.4.	OUTPUT POWER AND PSD .....	126
8.14.	<i>802.11n HT20 CHAIN 1 MODE IN THE 5.3 GHz BAND</i> .....	130
8.14.1.	26 dB BANDWIDTH.....	130
8.14.2.	99% BANDWIDTH.....	133
8.14.3.	AVERAGE POWER .....	136
8.14.4.	OUTPUT POWER AND PSD .....	137
8.15.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	141
8.15.1.	26 dB BANDWIDTH.....	141
8.15.2.	99% BANDWIDTH.....	145
8.15.3.	AVERAGE POWER .....	149
8.15.4.	OUTPUT POWER AND PSD .....	150
8.16.	<i>802.11n HT20 2Tx STBC MODE IN THE 5.3 GHz BAND</i> .....	155
8.17.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.3 GHz BAND</i> .....	156

8.17.1.	26 dB BANDWIDTH.....	156
8.17.2.	99% BANDWIDTH.....	158
8.17.3.	AVERAGE POWER.....	160
8.17.4.	OUTPUT POWER AND PSD.....	161
8.18.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.3 GHz BAND</i> .....	164
8.18.1.	26 dB BANDWIDTH.....	164
8.18.2.	99% BANDWIDTH.....	166
8.18.3.	AVERAGE POWER.....	168
8.18.4.	OUTPUT POWER AND PSD.....	169
8.19.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	172
8.19.1.	26 dB BANDWIDTH.....	172
8.19.2.	99% BANDWIDTH.....	175
8.19.3.	AVERAGE POWER.....	178
8.19.4.	OUTPUT POWER AND PSD.....	179
8.20.	<i>802.11n HT40 2Tx STBC MODE IN THE 5.3 GHz BAND</i> .....	183
8.21.	<i>802.11ac HT80 CHAIN 0 MODE IN THE 5.3 GHz BAND</i> .....	184
8.21.1.	26 dB BANDWIDTH.....	184
8.21.2.	99% BANDWIDTH.....	186
8.21.3.	AVERAGE POWER.....	188
8.21.4.	OUTPUT POWER AND PSD.....	189
8.22.	<i>802.11ac HT80 CHAIN 1 MODE IN THE 5.3 GHz BAND</i> .....	192
8.22.1.	26 dB BANDWIDTH.....	192
8.22.2.	99% BANDWIDTH.....	194
8.22.3.	AVERAGE POWER.....	196
8.22.4.	OUTPUT POWER AND PSD.....	197
8.23.	<i>802.11ac HT80 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	200
8.23.1.	26 dB BANDWIDTH.....	200
8.23.2.	99% BANDWIDTH.....	202
8.23.3.	AVERAGE POWER.....	204
8.23.4.	OUTPUT POWER AND PSD.....	205
8.24.	<i>802.11ac HT80 2Tx STBC MODE IN THE 5.3 GHz BAND</i> .....	208
8.25.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.6 GHz BAND</i> .....	209
8.25.1.	26 dB BANDWIDTH.....	209
8.25.2.	99% BANDWIDTH.....	212
8.25.3.	AVERAGE POWER.....	215
8.25.4.	OUTPUT POWER AND PSD.....	216
8.25.5.	STRADDLE CHANNEL 144 RESULTS.....	220
8.25.6.	6 dB BANDWIDTH.....	224
8.26.	<i>802.11n HT20 CHAIN 1 MODE IN THE 5.6 GHz BAND</i> .....	225
8.26.1.	26 dB BANDWIDTH.....	225
8.26.2.	99% BANDWIDTH.....	228
8.26.3.	AVERAGE POWER.....	231
8.26.4.	OUTPUT POWER AND PSD.....	232
8.26.5.	STRADDLE CHANNEL 144 RESULTS.....	236
8.26.6.	6 dB BANDWIDTH.....	240
8.27.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND</i> .....	241
8.27.1.	26 dB BANDWIDTH.....	241
8.27.2.	99% BANDWIDTH.....	246

8.27.3.	AVERAGE POWER .....	251
8.27.4.	OUTPUT POWER AND PSD .....	252
8.27.5.	STRADDLE CHANNEL 144 RESULTS.....	257
8.27.6.	6 dB BANDWIDTH.....	262
8.28.	<i>802.11n HT20 2Tx STBC MODE IN THE 5.6 GHz BAND .....</i>	<i>264</i>
8.29.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.6 GHz BAND .....</i>	<i>265</i>
8.29.1.	26 dB BANDWIDTH.....	265
8.29.2.	99% BANDWIDTH .....	268
8.29.3.	AVERAGE POWER .....	271
8.29.4.	OUTPUT POWER AND PSD .....	272
8.29.5.	STRADDLE CH 142 RESULTS .....	276
8.29.6.	6 dB BANDWIDTH.....	280
8.30.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.6 GHz BAND .....</i>	<i>281</i>
8.30.1.	26 dB BANDWIDTH.....	281
8.30.2.	99% BANDWIDTH .....	284
8.30.3.	AVERAGE POWER .....	287
8.30.4.	OUTPUT POWER AND PSD .....	288
8.30.5.	STRADDLE CH 142 RESULTS .....	292
8.30.6.	6 dB BANDWIDTH.....	296
8.31.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND .....</i>	<i>297</i>
8.31.1.	26 dB BANDWIDTH.....	297
8.31.2.	99% BANDWIDTH .....	302
8.31.3.	AVERAGE POWER .....	307
8.31.4.	OUTPUT POWER AND PSD .....	308
8.31.5.	STRADDLE CHANNEL 142 RESULTS.....	313
8.31.6.	6 dB BANDWIDTH .....	318
8.32.	<i>802.11n HT40 2Tx STBC MODE IN THE 5.6 GHz BAND .....</i>	<i>320</i>
8.33.	<i>802.11ac HT80 CHAIN 0 MODE IN THE 5.6 GHz BAND.....</i>	<i>321</i>
8.33.1.	26 dB BANDWIDTH.....	321
8.33.2.	99% BANDWIDTH .....	324
8.33.3.	AVERAGE POWER .....	327
8.33.4.	OUTPUT POWER AND PSD .....	328
8.33.5.	STRADDLE CHANNEL 138 RESULTS.....	331
8.33.6.	6 dB BANDWIDTH.....	335
8.34.	<i>802.11ac HT80 CHAIN 1 MODE IN THE 5.6 GHz BAND.....</i>	<i>336</i>
8.34.1.	26 dB BANDWIDTH.....	336
8.34.2.	99% BANDWIDTH .....	339
8.34.3.	AVERAGE POWER .....	342
8.34.4.	OUTPUT POWER AND PSD .....	343
8.34.5.	STRADDLE CHANNEL 138 RESULTS.....	346
8.34.6.	6 dB BANDWIDTH.....	350
8.35.	<i>802.11ac HT80 2Tx CDD MODE IN THE 5.6 GHz BAND (5610MHz).....</i>	<i>351</i>
8.35.1.	26 dB BANDWIDTH.....	351
8.35.2.	99% BANDWIDTH .....	355
8.35.3.	AVERAGE POWER .....	359
8.35.4.	OUTPUT POWER AND PSD .....	360
8.35.5.	STRADDLE CHANNEL 138 RESULTS.....	364
8.35.6.	6 dB BANDWIDTH.....	369
8.36.	<i>802.11ac HT80 2Tx STBC MODE IN THE 5.6 GHz BAND (5610MHz).....</i>	<i>371</i>

8.37.	802.11n HT20 CHAIN 0 MODE IN THE 5.8 GHz BAND .....	372
8.37.1.	6 dB BANDWIDTH.....	372
8.37.2.	26 dB BANDWIDTH.....	375
8.37.3.	99% BANDWIDTH.....	378
8.37.4.	AVERAGE POWER.....	381
8.37.5.	OUTPUT POWER.....	382
8.37.6.	PSD .....	384
8.38.	802.11n HT20 CHAIN 1 MODE IN THE 5.8 GHz BAND .....	387
8.38.1.	6 dB BANDWIDTH.....	387
8.38.2.	26 dB BANDWIDTH.....	390
8.38.3.	99% BANDWIDTH.....	393
8.38.4.	AVERAGE POWER.....	396
8.38.5.	OUTPUT POWER.....	397
8.38.6.	PSD .....	399
8.39.	802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND.....	402
8.39.1.	6 dB BANDWIDTH.....	402
8.39.2.	26 dB BANDWIDTH.....	406
8.39.3.	99% BANDWIDTH.....	410
8.39.4.	AVERAGE POWER.....	414
8.39.5.	OUTPUT POWER.....	415
8.39.6.	PSD .....	417
8.40.	802.11n HT20 2Tx STBC MODE IN THE 5.8 GHz BAND.....	422
8.41.	802.11n HT40 CHAIN 0 MODE IN THE 5.8 GHz BAND .....	423
8.41.1.	6 dB BANDWIDTH.....	423
8.41.2.	26 dB BANDWIDTH.....	425
8.41.3.	99% BANDWIDTH.....	427
8.41.4.	AVERAGE POWER.....	429
8.41.5.	OUTPUT POWER.....	430
8.41.6.	PSD .....	432
8.42.	802.11n HT40 CHAIN 1 MODE IN THE 5.8 GHz BAND .....	435
8.42.1.	6 dB BANDWIDTH.....	435
8.42.2.	26 dB BANDWIDTH.....	437
8.42.3.	99% BANDWIDTH.....	439
8.42.4.	AVERAGE POWER.....	441
8.42.5.	OUTPUT POWER.....	442
8.42.6.	PSD .....	444
8.43.	802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND.....	447
8.43.1.	6 dB BANDWIDTH.....	447
8.43.2.	26 dB BANDWIDTH.....	450
8.43.3.	99% BANDWIDTH.....	453
8.43.4.	AVERAGE POWER.....	456
8.43.5.	OUTPUT POWER.....	457
8.43.6.	PSD .....	459
8.44.	802.11n HT40 2Tx STBC MODE IN THE 5.8 GHz BAND.....	463
8.45.	802.11ac VHT80 CHAIN 0 MODE IN THE 5.8 GHz BAND .....	464
8.45.1.	6 dB BANDWIDTH.....	464
8.45.2.	26 dB BANDWIDTH.....	465
8.45.3.	99% BANDWIDTH.....	466
8.45.4.	AVERAGE POWER.....	467

8.45.5.	OUTPUT POWER.....	468
8.45.6.	PSD .....	470
8.46.	<i>802.11ac VHT80 CHAIN 1 MODE IN THE 5.8 GHz BAND</i> .....	472
8.46.1.	6 dB BANDWIDTH.....	472
8.46.2.	26 dB BANDWIDTH.....	473
8.46.3.	99% BANDWIDTH.....	474
8.46.4.	AVERAGE POWER.....	475
8.46.5.	OUTPUT POWER.....	476
8.46.6.	PSD .....	478
8.47.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND</i> .....	480
8.47.1.	6 dB BANDWIDTH.....	480
8.47.2.	26 dB BANDWIDTH.....	482
8.47.3.	99% BANDWIDTH.....	484
8.47.4.	AVERAGE POWER.....	486
8.47.5.	OUTPUT POWER.....	487
8.47.6.	PSD .....	489
8.48.	<i>802.11n HT80 2Tx STBC MODE IN THE 5.8 GHz BAND</i> .....	492
<b>9.</b>	<b>ANTENNA PORT TEST RESULTS (MODEL: 1687).....</b>	<b>493</b>
<b>10.</b>	<b>RADIATED TEST RESULTS (MODEL: A1634) .....</b>	<b>494</b>
10.1.	<i>LIMITS AND PROCEDURE</i> .....	494
10.2.	<i>802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND</i> .....	495
10.3.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	511
10.4.	<i>802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND</i> .....	519
10.5.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	531
10.6.	<i>802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND</i> .....	537
10.7.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	545
10.8.	<i>802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND</i> .....	549
10.9.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	565
10.10.	<i>802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND</i> .....	573
10.11.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	585
10.12.	<i>802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND</i> .....	591
10.13.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	599
10.14.	<i>802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND</i> .....	603
10.15.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND</i> .....	627
10.16.	<i>802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND</i> .....	639
10.17.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND</i> .....	663
10.18.	<i>802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND</i> .....	675
10.19.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND</i> .....	691
10.20.	<i>802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND</i> .....	699
10.21.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND</i> .....	719



10.22.	802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND .....	729
10.23.	802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND.....	745
10.24.	802.11ac 80MHz 1Tx MODE IN THE 5.8 GHz BAND .....	753
10.25.	802.11ac 80MHz 2Tx CDD MODE IN THE 5.8 GHz BAND.....	765
10.26.	WORST-CASE BELOW 1 GHz.....	771
10.27.	WORST-CASE ABOVE 18 GHz .....	773
<b>11.</b>	<b>RADIATED TEST RESULTS (MODEL: A1687) .....</b>	<b>775</b>
11.1.	LIMITS AND PROCEDURE .....	775
11.2.	802.11n HT20 1TX MODE IN THE 5.2 GHz BAND.....	776
11.3.	802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND.....	793
11.4.	802.11n HT40 1TX MODE IN THE 5.2 GHz BAND.....	801
11.5.	802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND.....	813
11.6.	802.11ac VHT80 1TX MODE IN THE 5.2 GHz BAND.....	819
11.7.	802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND Check for DC.....	827
11.8.	802.11n HT20 1TX MODE IN THE 5.3 GHz BAND.....	831
11.9.	802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND.....	847
11.10.	802.11n HT40 1TX MODE IN THE 5.3 GHz BAND.....	855
11.11.	802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND.....	867
11.12.	802.11ac VHT80 1TX MODE IN THE 5.3 GHz BAND.....	873
11.13.	802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND .....	881
11.14.	802.11n HT20 1TX MODE IN THE 5.6 GHz BAND.....	885
11.15.	802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND.....	909
11.16.	802.11n HT40 1TX MODE IN THE 5.6 GHz BAND.....	921
11.17.	802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND.....	945
11.18.	802.11ac VHT80 1TX MODE IN THE 5.6 GHz BAND.....	957
11.19.	802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND .....	973
11.20.	802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND .....	981
11.21.	802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND.....	1001
11.22.	802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND .....	1011
11.23.	802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND.....	1027
11.24.	802.11ac 80MHz 1Tx MODE IN THE 5.8 GHz BAND .....	1035
11.25.	802.11ac 80MHz 2Tx CDD MODE IN THE 5.8 GHz BAND.....	1047
11.26.	WORST-CASE BELOW 1 GHz.....	1053
11.27.	WORST-CASE ABOVE 18 GHz .....	1055
<b>12.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>1057</b>
12.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE .....	1058

12.2. EUT POWERED BY HOST PC VIA USB CABLE ..... 1060

**13. DYNAMIC FREQUENCY SELECTION..... 1062**

13.1. OVERVIEW ..... 1062

13.1.1. LIMITS ..... 1062

13.1.1. TEST AND MEASUREMENT SYSTEM ..... 1066

13.1.2. SETUP OF EUT (CLIENT MODE) ..... 1069

13.1.3. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)..... 1070

13.1.4. DESCRIPTION OF EUT ..... 1071

13.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH ..... 1073

13.2.1. TEST CHANNEL..... 1073

13.2.2. RADAR WAVEFORM AND TRAFFIC ..... 1073

13.2.3. OVERLAPPING CHANNEL TESTS ..... 1076

13.2.4. MOVE AND CLOSING TIME ..... 1076

13.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH ..... 1080

13.3.1. TEST CHANNEL..... 1080

13.3.2. RADAR WAVEFORM AND TRAFFIC ..... 1080

13.3.3. OVERLAPPING CHANNEL TESTS ..... 1083

13.3.4. MOVE AND CLOSING TIME ..... 1083

13.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH ..... 1087

13.4.1. TEST CHANNEL..... 1087

13.4.2. RADAR WAVEFORM AND TRAFFIC ..... 1087

13.4.3. OVERLAPPING CHANNEL TESTS ..... 1090

13.4.4. MOVE AND CLOSING TIME ..... 1090

13.4.5. 10-MINUTE BEACON MONITORING PERIOD..... 1094

13.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH  
1095

13.5.1. TEST CHANNEL..... 1095

13.5.2. RADAR WAVEFORM AND TRAFFIC ..... 1095

13.5.3. OVERLAPPING CHANNEL TESTS ..... 1098

13.5.4. MOVE AND CLOSING TIME ..... 1098

13.6. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH  
1102

13.6.1. TEST CHANNEL..... 1102

13.6.2. RADAR WAVEFORM AND TRAFFIC ..... 1102

13.6.3. OVERLAPPING CHANNEL TESTS ..... 1105

13.6.4. MOVE AND CLOSING TIME ..... 1105

13.7. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH  
1109

13.7.1. TEST CHANNEL..... 1109

13.7.2. RADAR WAVEFORM AND TRAFFIC ..... 1109

13.7.3. OVERLAPPING CHANNEL TESTS ..... 1112

13.7.4. MOVE AND CLOSING TIME ..... 1112

13.7.5. 10-MINUTE CLIENT TX MONITORING PERIOD ..... 1116

**14. SETUP PHOTOS..... 1117**

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

**MODEL:** A1634, A1687, A1690 AND A1699

**SERIAL NUMBER:** A1634:  
C39PV00FGLK3 (CONDUCTED); C39PV00LGQ77 (RADIATED);  
C39PR00HGQ72 (DFS)  
A1687:  
C39PV08RGQ6N (CONDUCTED); C39PV05XGQ6N (RADIATED)


**DATE TESTED:** MAY 20 – JULY 17, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



MENGISTU MEKURIA  
SENIOR ENGINEER  
UL VERIFICATION SERVICES INC.

Tested By:



JOE VANG  
EMC LAB ENGINEER  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

FCC: The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v01r01/D03 v01r01/D06 v01, FCC KDB 789033 D02, FCC KDB 644545 D03 v01 and ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input checked="" type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input checked="" type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input checked="" type="checkbox"/> Chamber F
	<input checked="" type="checkbox"/> Chamber G
	<input checked="" type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA/EVDO/LTE radio, IEEE 802.11a/b/g/n/ac, NFC, Bluetooth and GPS radio. The rechargeable battery is not user accessible.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

#### 5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	18.41	69.34
	802.11n HT20 CDD 2TX	20.00	100.00
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5190 - 5230	802.11n HT40 SISO	17.92	61.94
	802.11n HT40 CDD 2TX	20.70	117.49
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 CDD 2TX	
5210	802.11ac VHT80 SISO	13.50	22.39
	802.11ac VHT80 2TX CDD	15.00	31.62
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11n HT80 CDD 2TX	

#### 5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	18.48	70.47
	802.11n HT20 2TX CDD	19.99	99.77
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5270 - 5310	802.11n HT40 SISO	17.94	62.23
	802.11n HT40 2TX CDD	20.68	116.95
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 CDD 2TX	
5290	802.11ac VHT80 SISO	13.97	24.95
	802.11ac VHT80 2TX CDD	17.00	50.12
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11n HT80 CDD 2TX	

**5.6GHz Band**

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5720	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	18.47	70.31
5720	802.11n HT20 SISO	16.97	49.77
5500 - 5700	802.11n HT20 2TX CDD	19.97	99.31
5720	802.11n HT20 2TX CDD	18.53	71.29
5500 - 5700	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5720	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5510 - 5670	802.11n HT40 SISO	17.98	62.81
5710	802.11n HT40 SISO	17.54	56.75
5510 - 5670	802.11n HT40 2TX CDD	20.69	117.22
5710	802.11n HT40 2TX CDD	20.29	106.91
5510 - 5670	802.11n HT40 2TX STBC	Covered by 802.11n HT40 CDD 2TX	
5710	802.11n HT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5530-5610	802.11ac VHT80 SISO	17.99	62.95
5690	802.11ac VHT80 SISO	18.00	63.10
5530-5610	802.11ac VHT80 CDD 2TX	20.92	123.59
5690	802.11ac VHT80 CDD 2TX	20.79	119.95
5530-5610	802.11ac VHT80 2TX STBC	Covered by 802.11n VHT80 CDD 2TX	
5690	802.11ac VHT80 2TX STBC	Covered by 802.11n VHT80 CDD 2TX	

**5.8GHz Band**

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
5745 - 5825	802.11n HT20 SISO	17.97	62.66
5745 - 5825	802.11a 2TX CDD	Covered by 802.11n HT20 CDD 2TX	
5745 - 5825	802.11n HT20 CDD 2TX	20.96	124.74
5745 - 5825	802.11n HT20 STBC/SDM 2TX	Covered by 802.11n HT20 CDD 2TX	
5755 - 5795	802.11n HT40 SISO	17.95	62.37
5755 - 5795	802.11n HT40 CDD 2TX	19.98	99.54
5755 - 5795	802.11n HT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5775	802.11ac VHT80 SISO	14.64	29.11
5775	802.11ac VHT80 CDD 2TX	16.69	46.67
5775	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11n VHT80 CDD 2TX	

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain	
	Chain 0	Chain 1
5.2	-4.08	0.68
5.3	-2.15	1.89
5.5	-0.12	0.27
5.8	-0.07	-1.35

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 7.15.239.6.  
The test utility software used during testing was wl 7.15.239.6.



### 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Chain 0	Z
		Chain 1	Y
	2TX MIMO	Chain 0 + Chain 1	Z

Worst-case data rates as provided by the client were:

- 802.11a mode: 6 Mbps
- 802.11n HT20 mode: MCS0
- 802.11n HT40 mode: MCS0
- 802.11ac VHT20 mode: MCS0
- 802.11ac VHT40 mode: MCS0
- 802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the BT/BLE 2.4 GHz, 5GHz and Cellular bands; or WLAN 2.4GHz and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

Based on the manufacturer’s statement Model A1687, A1690 and A1699 are exactly same, except for marketing reasons.

For WLAN/BT mode, all four models use the same WLAN/BT chipset. Therefore, conducted tests on Model A1634 was considered representative of Model A1687. Radiated testing was performed on both models A1634 and A1687.

Delta Items	A1634	A1687	A1690	A1699
Band 30	Yes	No	No	No

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Latitude 3540	6LNG802	N/A
Laptop AC/DC adapter	Dell	FA90PE1-00	CN-0CM889-73245-95L-4954-A00	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1385	D293062F3WVDHLHCF	N/A

### I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	2	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

### I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None used						


### I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A
2	Audio	1	Jack	Un-shielded	0.5	NA

**TEST SETUP**

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


**SETUP DIAGRAM**

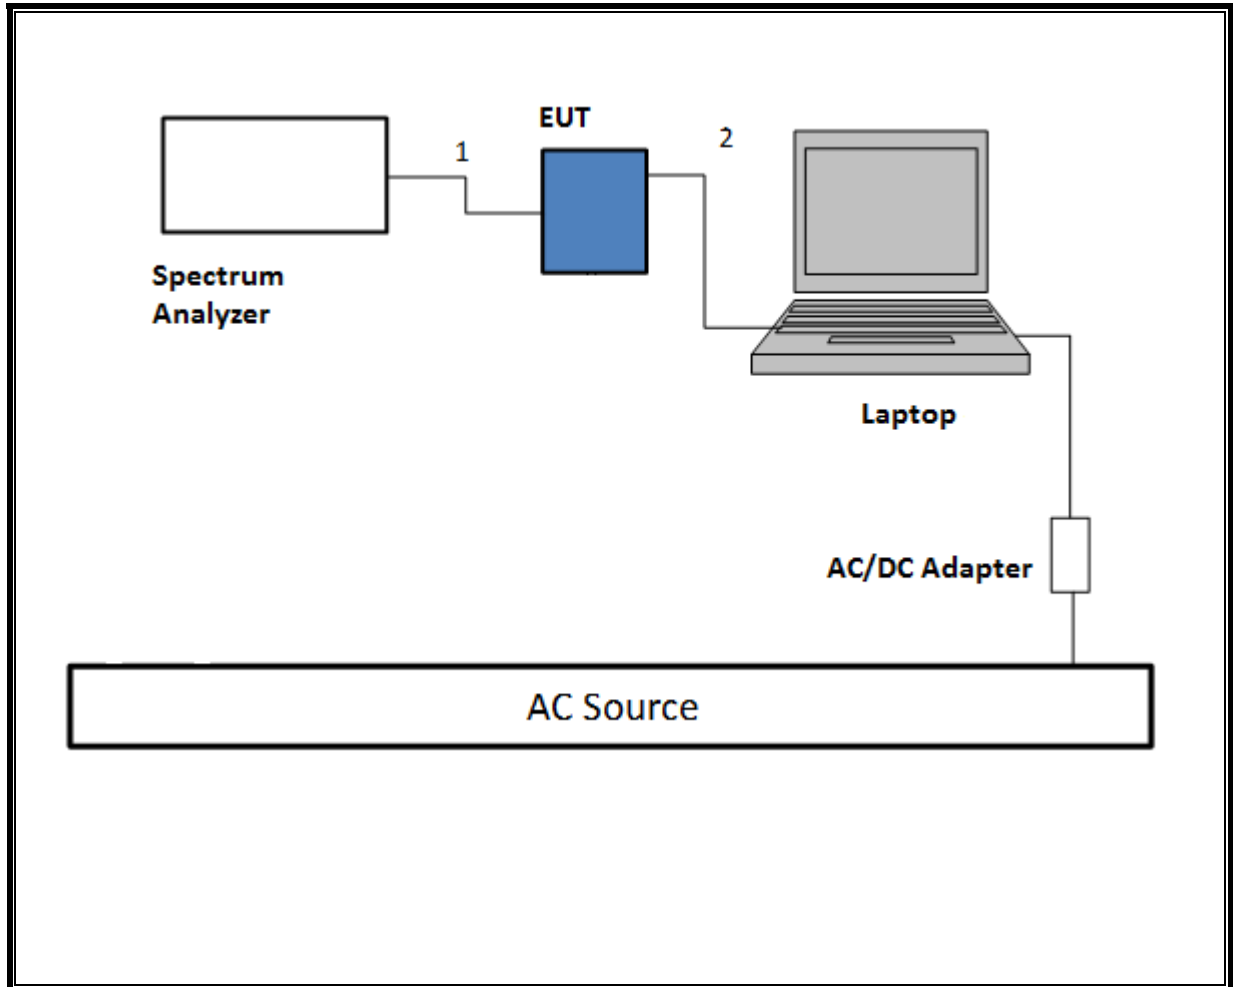

**TEST SETUP- RADIATED-ABOVE 1 GHZ**

The EUT was tested battery powered. Test software exercised the EUT.


**SETUP DIAGRAM**

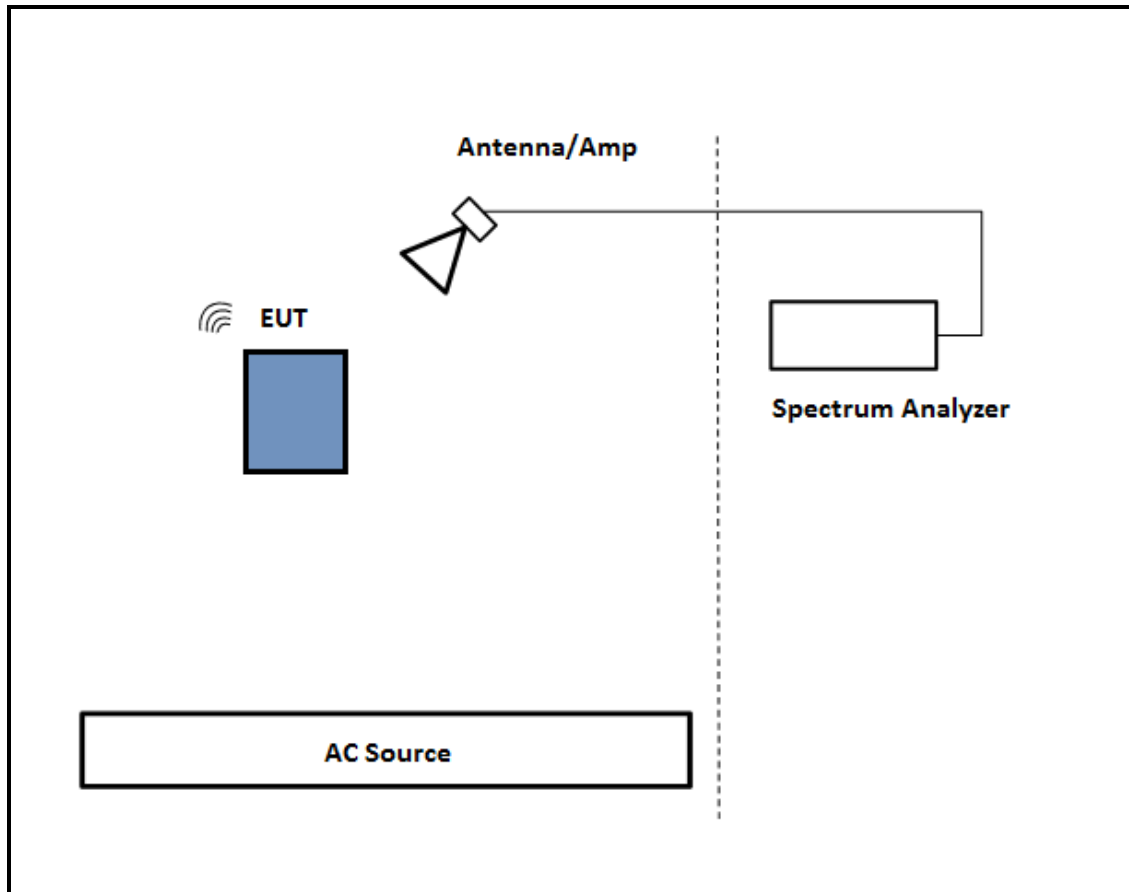

**TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS**

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.

**SETUP DIAGRAM**

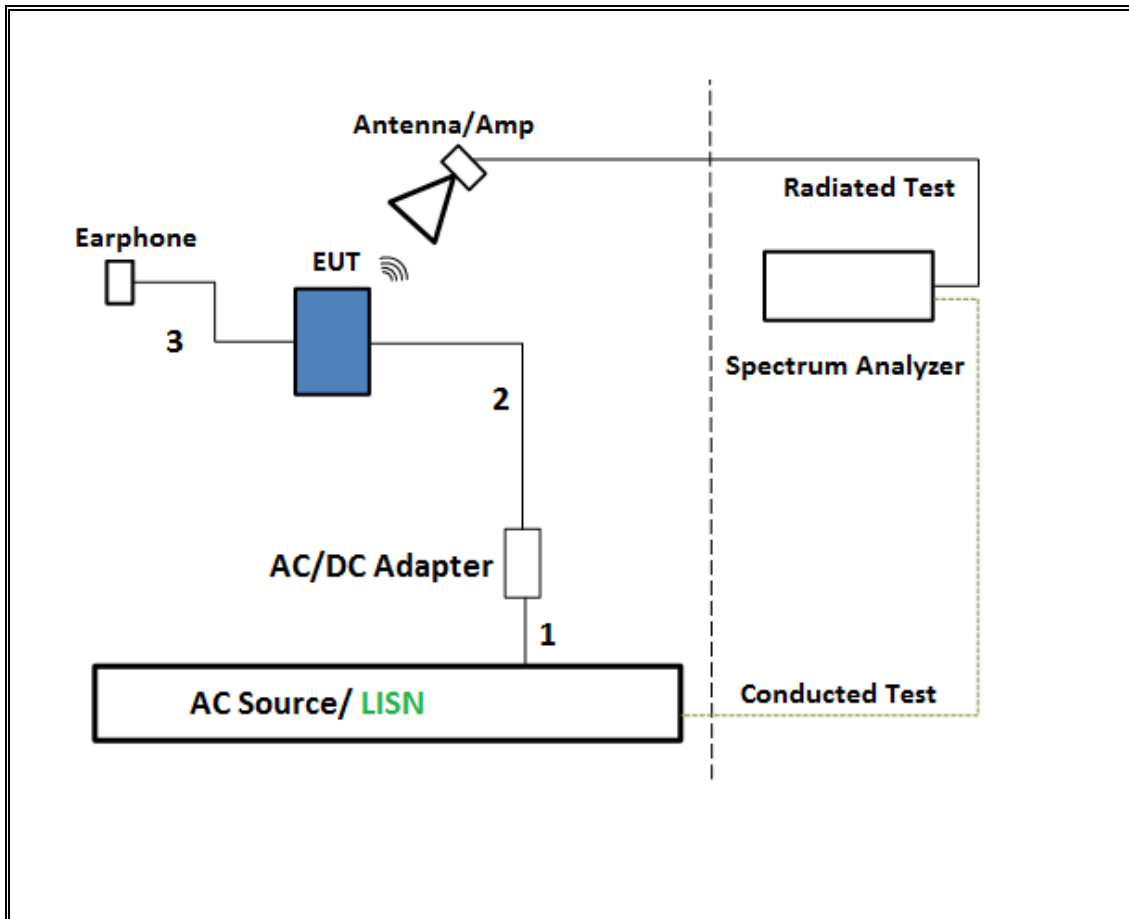

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	00143448	2/10/2016
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	A022813-1	1/14/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1782158	1/26/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	323561	6/8/2015
Spectrum Analyzer, PXA, 3Hz to 50GHz	Agilent	N9030A	MY52350427	9/13/2015
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	325117	6/9/2015
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A-544	US51160264	12/23/2015
Power Meter, P-series single channel	Agilent	N1911A	GB45100212	10/9/2015
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	MY53260010	7/12/2015
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	1049	12/17/2015
Horn Antenna, 40GHz	ARA	MWH-2640/B	1029	7/15/2015
Spectrum Analyzer, 40 GHz	Agilent	8564E	3943A01643	8/6/2015
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	3008A01114	10/4/2015
Amplifier, 26 to 40GHz	Miteq	NSP4000-SP2	1029	9/3/2015
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	100935	9/16/2015
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	114	1/16/2016
Power Cable, Line Conducted Emissions ANSI 63.4	UL	PG1	N/A	7/28/2015
UL SOFTWARE				
*Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
*Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
*AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

Note: \* indicates automation software version used in the compliance certification testing

## 7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.



#### PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.



#### RESULTS



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.914	1.938	0.988	98.76%	0.00	0.010
802.11n HT20 CDD	1.914	1.938	0.988	98.76%	0.00	0.010
802.11n HT40 1TX	1.120	1.140	0.982	98.25%	0.00	0.010
802.11n HT40 CDD	1.120	1.140	0.982	98.25%	0.00	0.010
802.11ac VHT80 1TX	0.542	0.565	0.959	95.93%	0.18	1.845
802.11ac VHT80 CDD	0.459	0.482	0.952	95.23%	0.21	2.179

**DUTY CYCLE PLOTS**

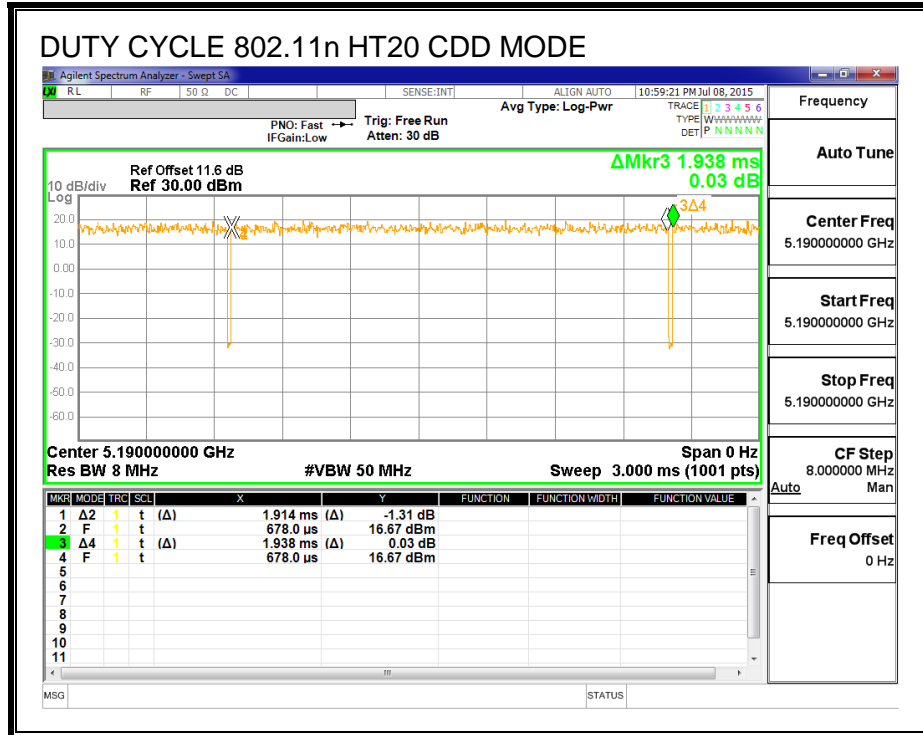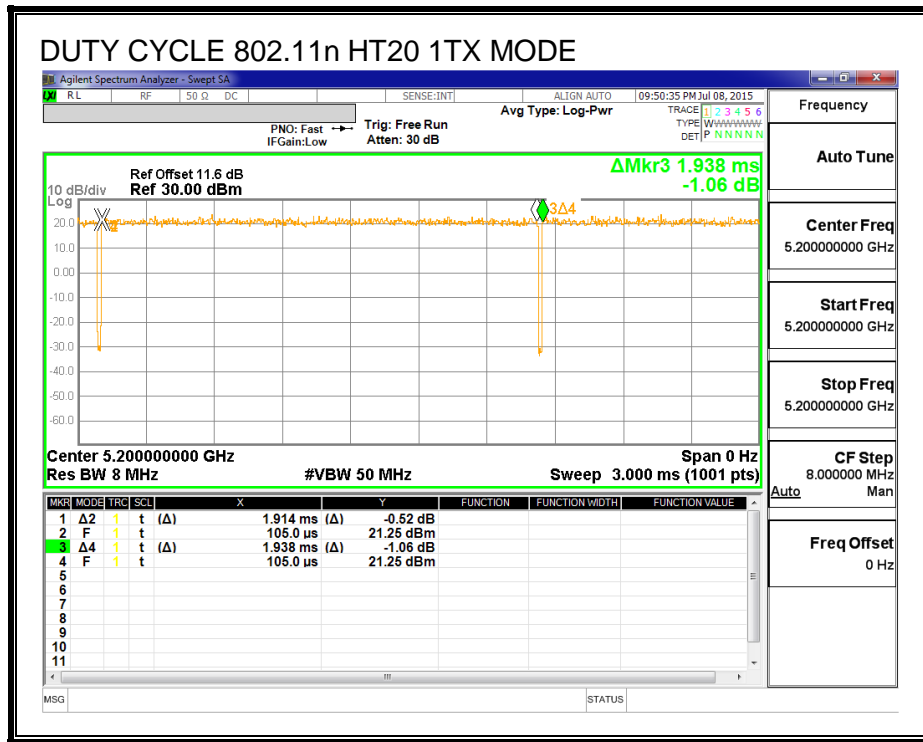



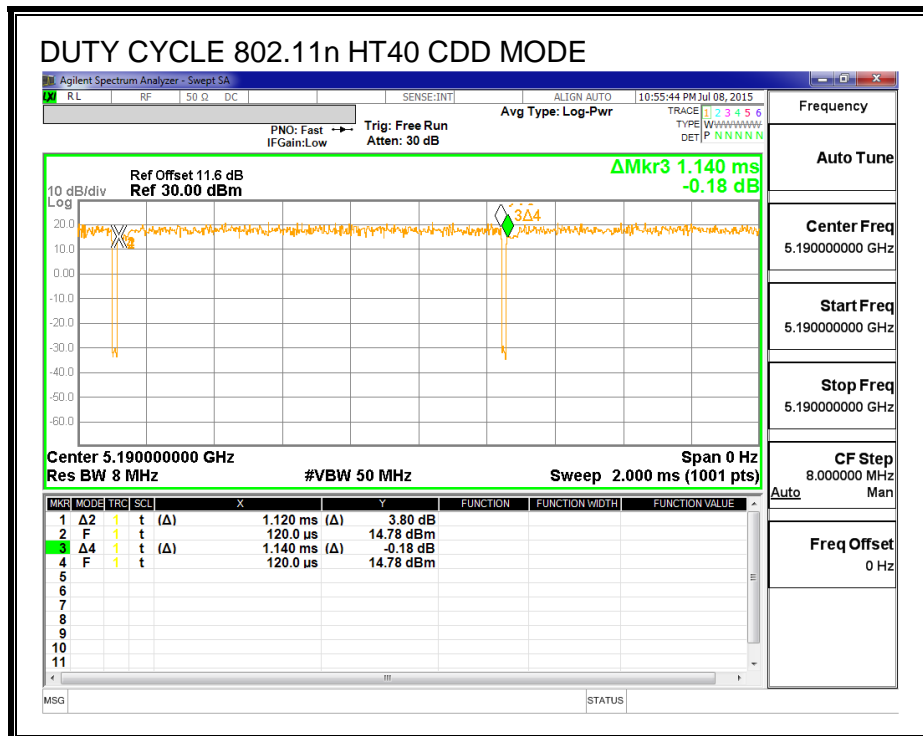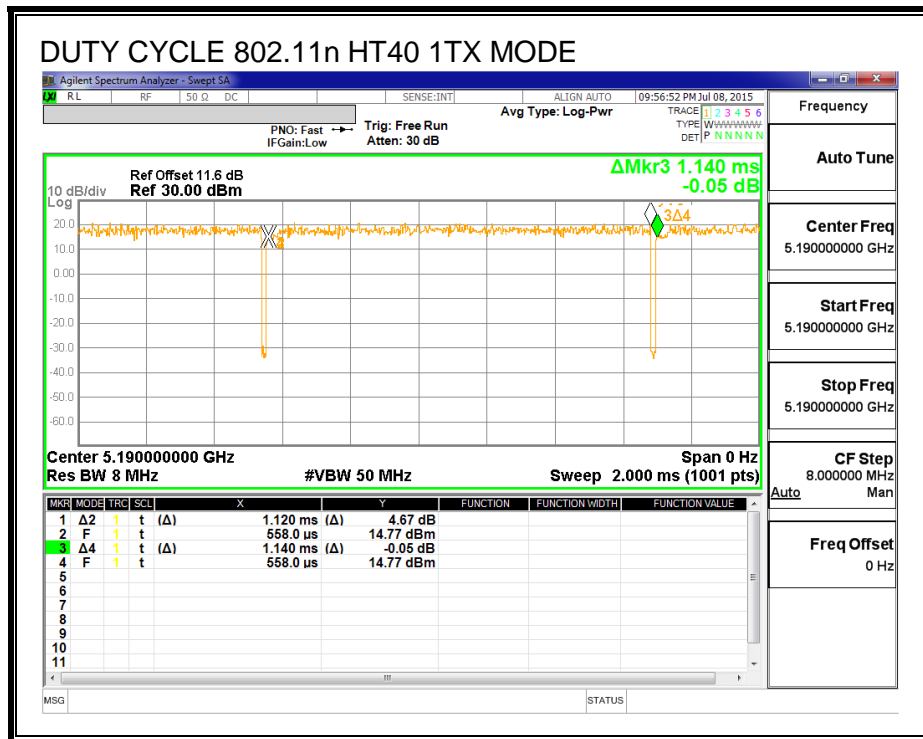

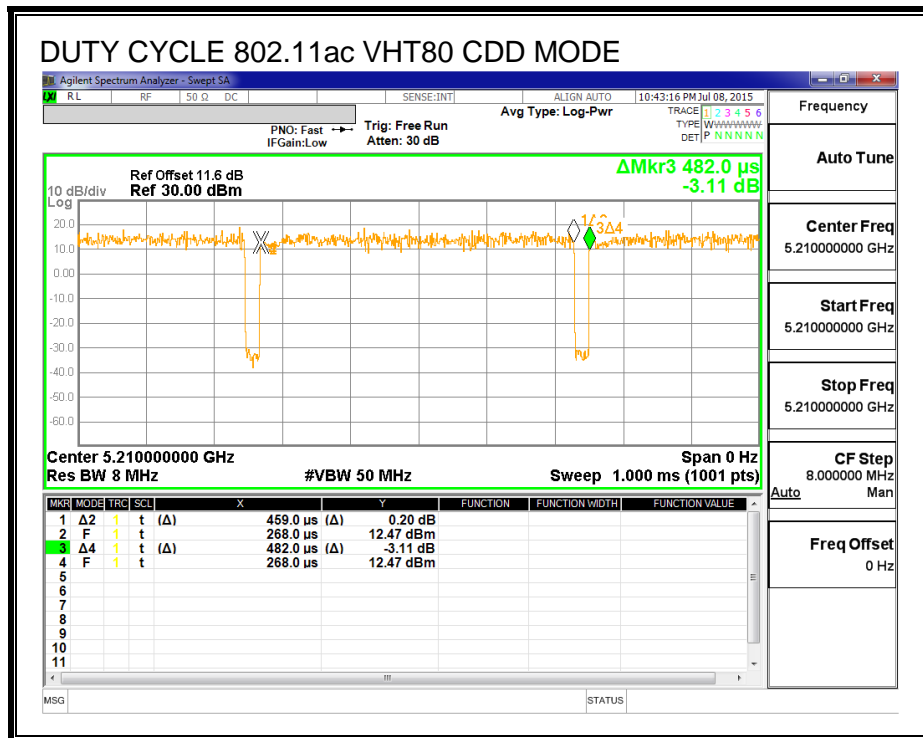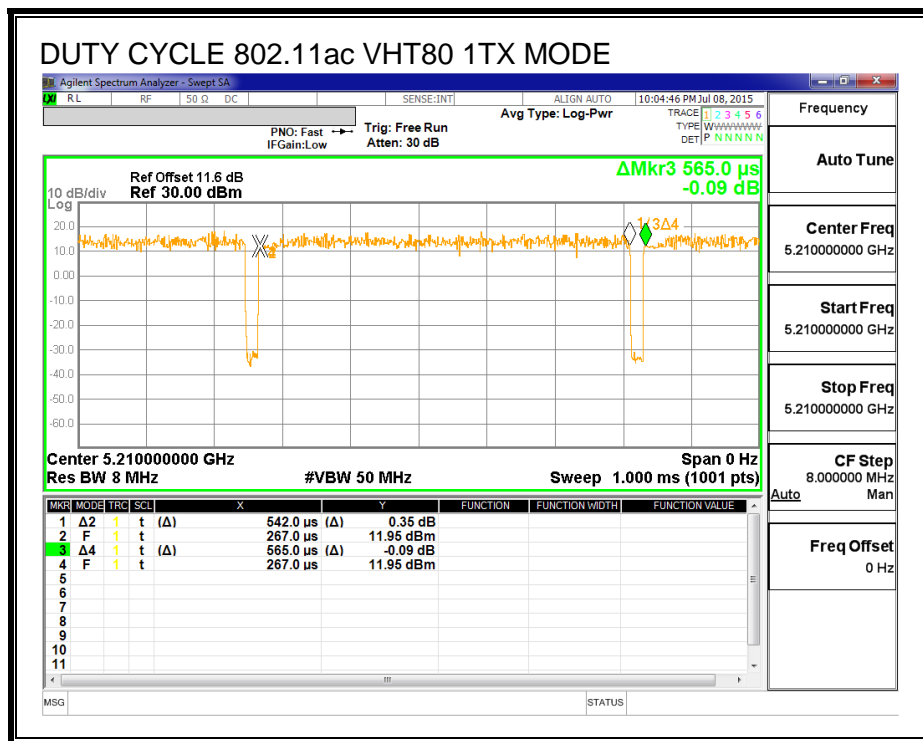

## **7.2. MEASUREMENT METHODS**

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Conducted Output Power: KDB 789033 D02 v01, Section E.3.a (Method PM).

Power Spectral Density: KDB 789033 D02 v01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, and G.5.

## 8. ANTENNA PORT TEST RESULTS (MODEL: A1634)

### 8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND

#### 8.1.1. 26 dB BANDWIDTH



##### LIMITS


None; for reporting purposes only.

##### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.20
Mid	5200	22.36
High	5240	22.08

**26 dB BANDWIDTH**

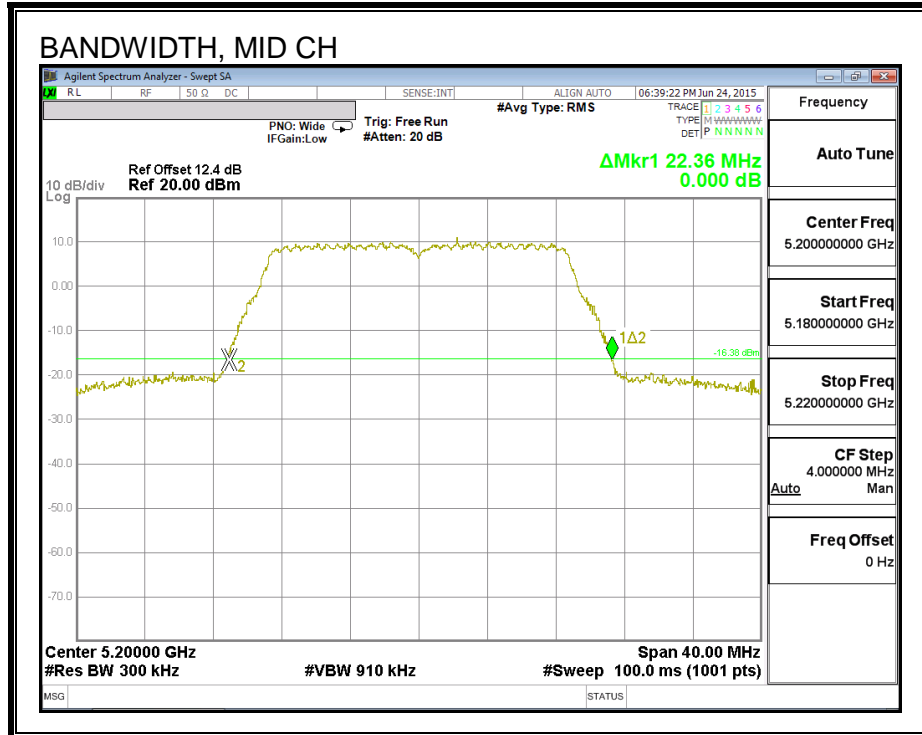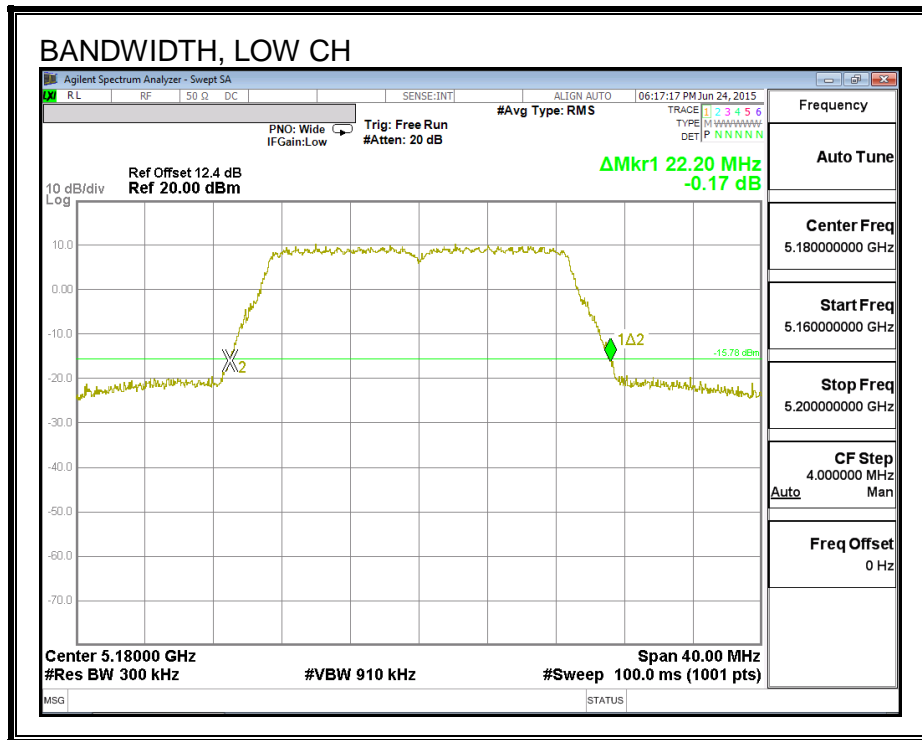

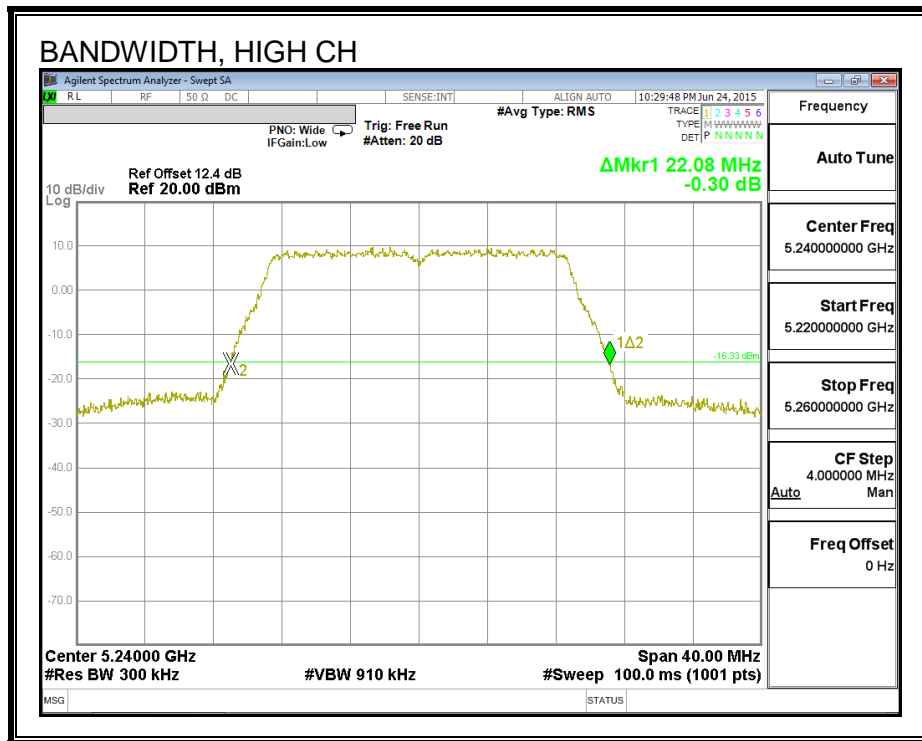

### 8.1.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.777
Mid	5200	17.754
High	5240	17.758

**99% BANDWIDTH**

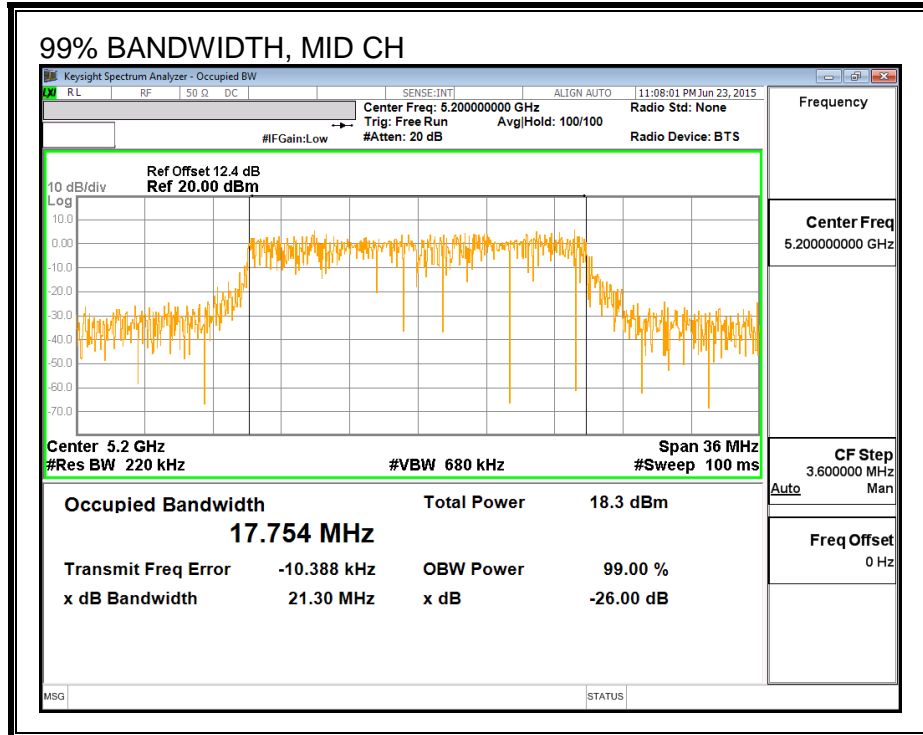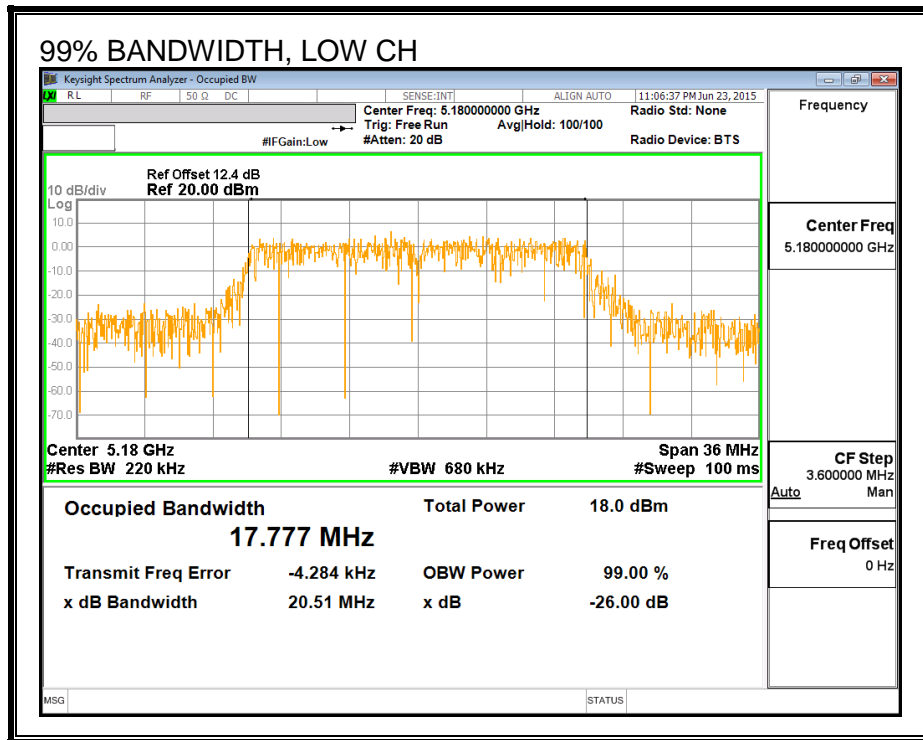



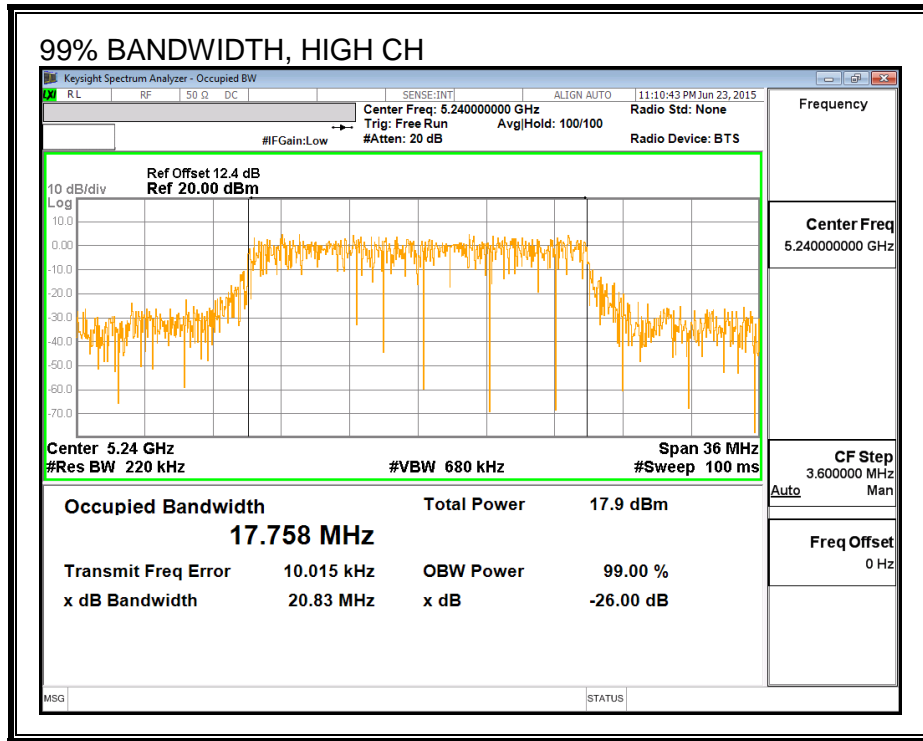

### 8.1.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	16.91
Mid	5200	17.89
High	5240	17.94

## 8.1.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-4.08	-4.08	24.00	11.00
Mid	5200	-4.08	-4.08	24.00	11.00
High	5240	-4.08	-4.08	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.91	16.91	24.00	-7.09
Mid	5200	17.89	17.89	24.00	-6.11
High	5240	17.94	17.94	24.00	-6.06

**PSD Results**

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	5.44	5.44	11.00	-5.57
Mid	5200	6.35	6.35	11.00	-4.65
High	5240	6.41	6.41	11.00	-4.59

**PSD**

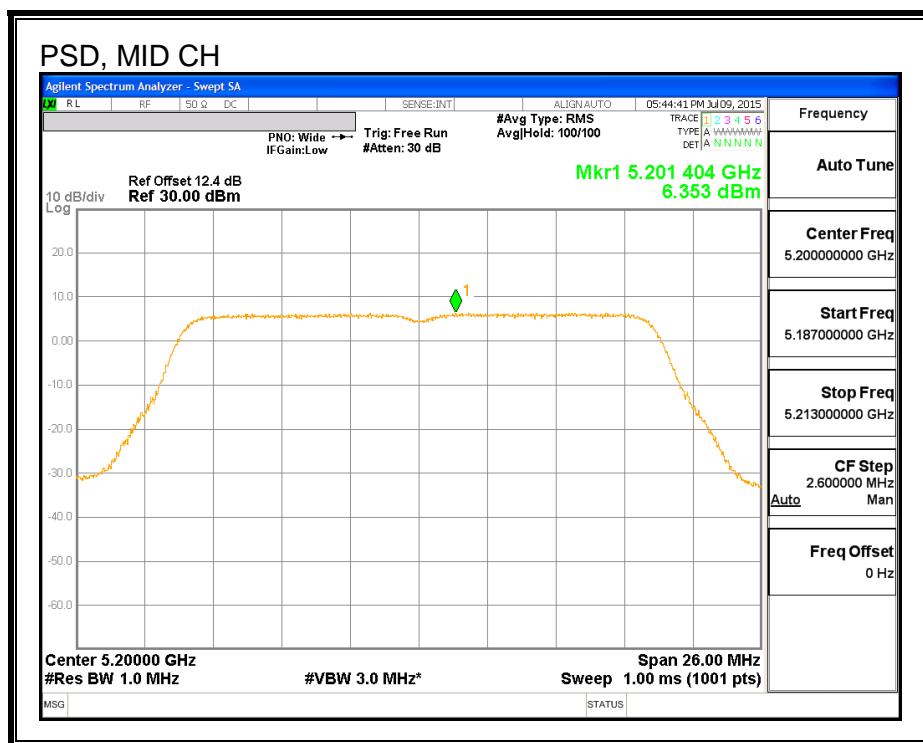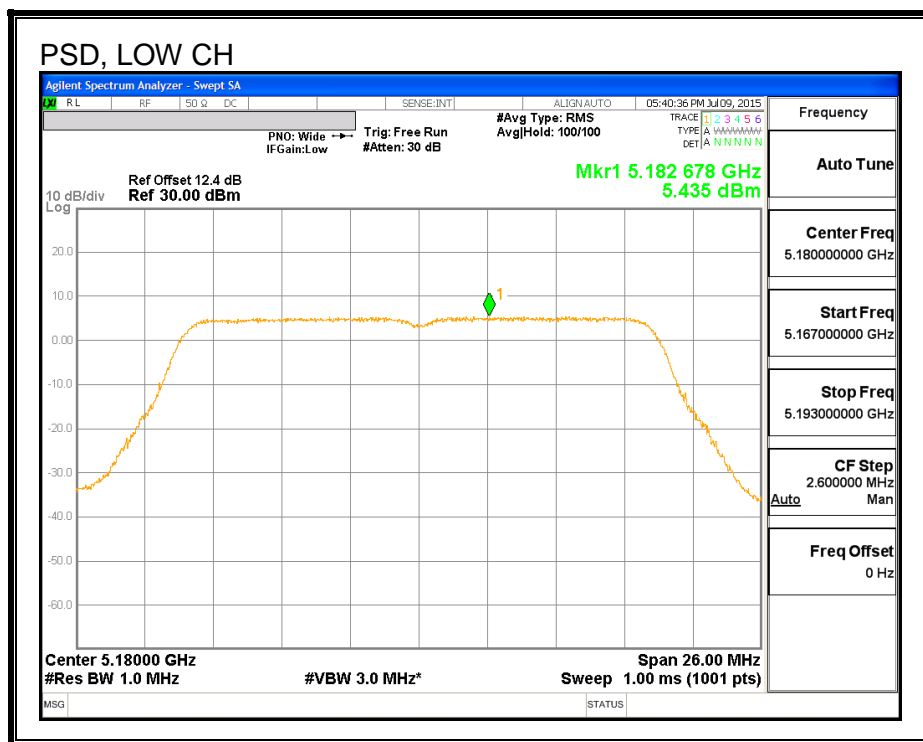

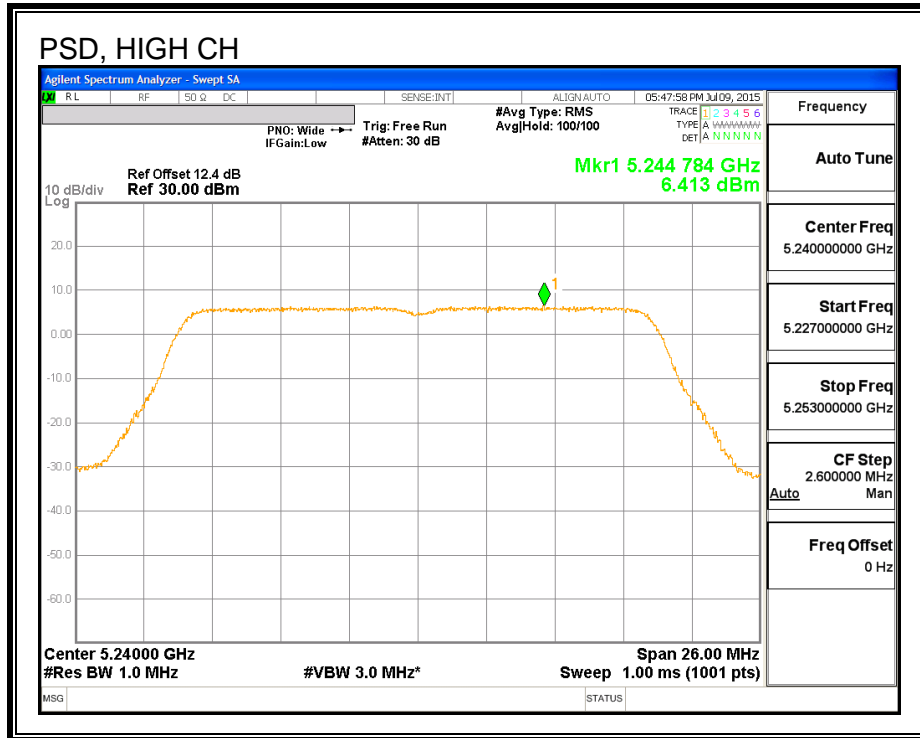

## 8.2. 802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND

### 8.2.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.36
Mid	5200	22.24
High	5240	22.20

**26 dB BANDWIDTH**

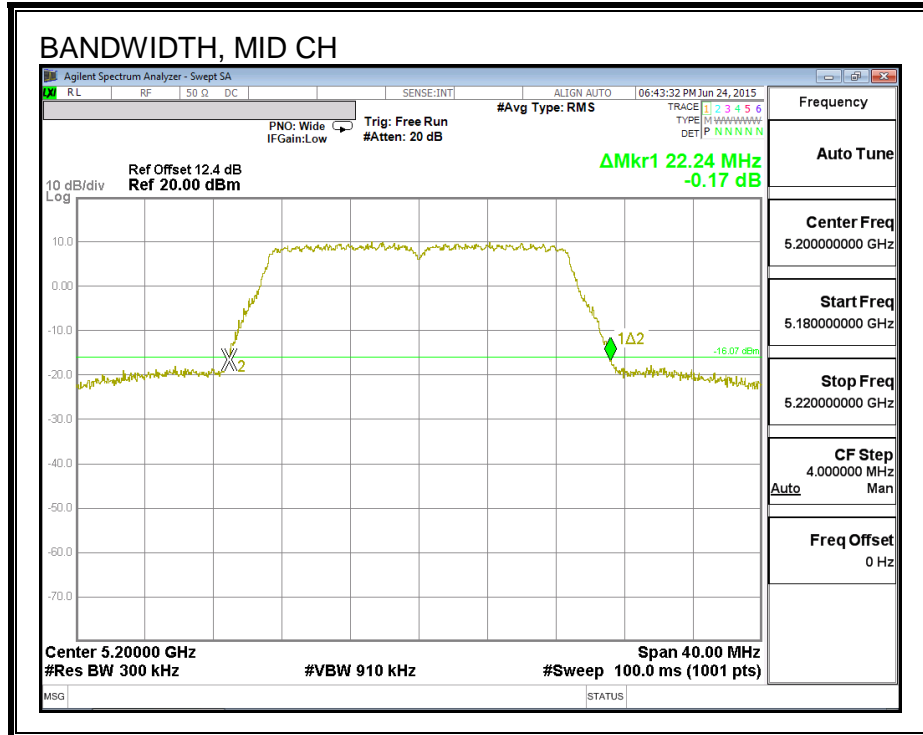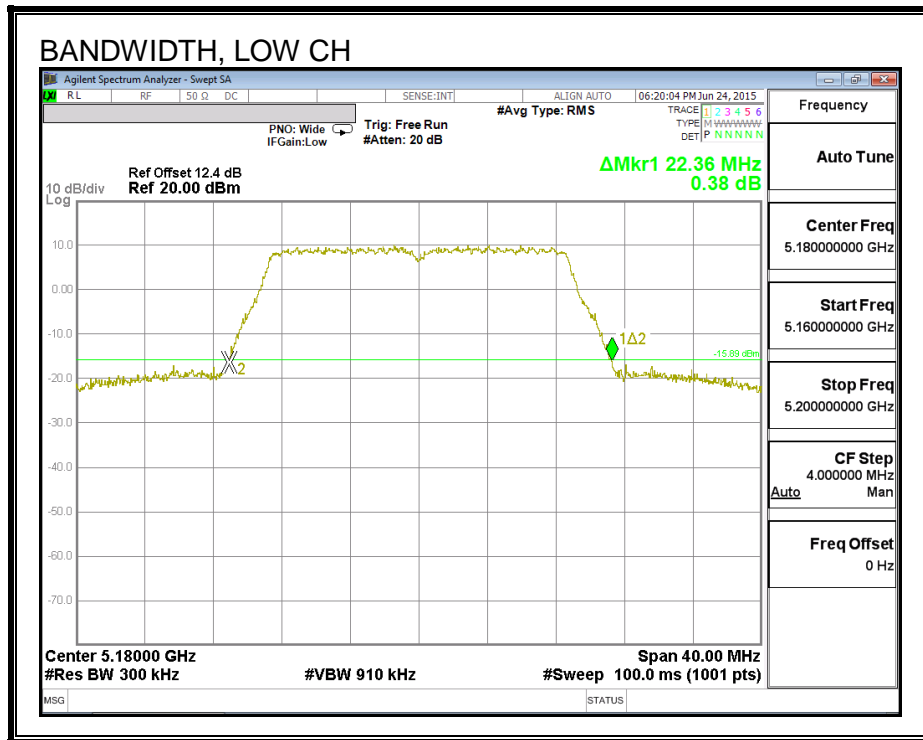



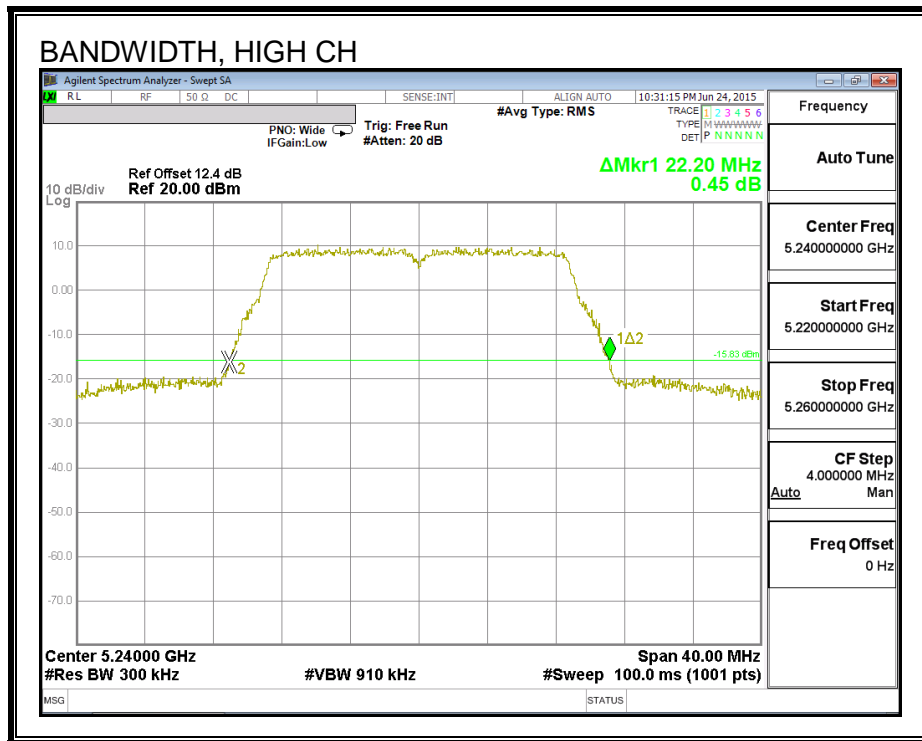

### 8.2.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.685
Mid	5200	17.782
High	5240	17.701

**99% BANDWIDTH**

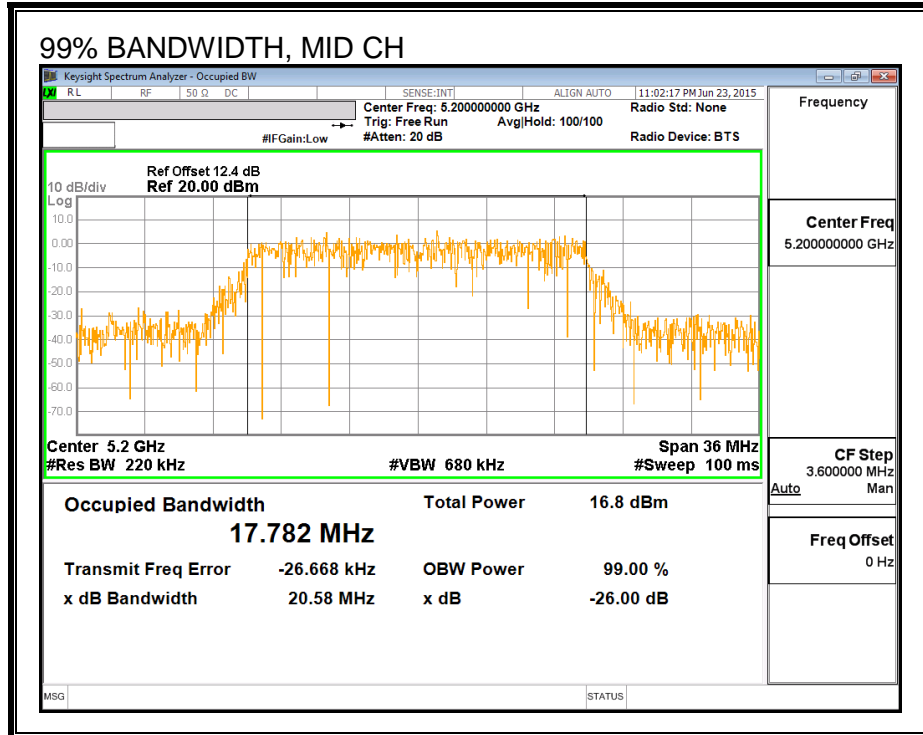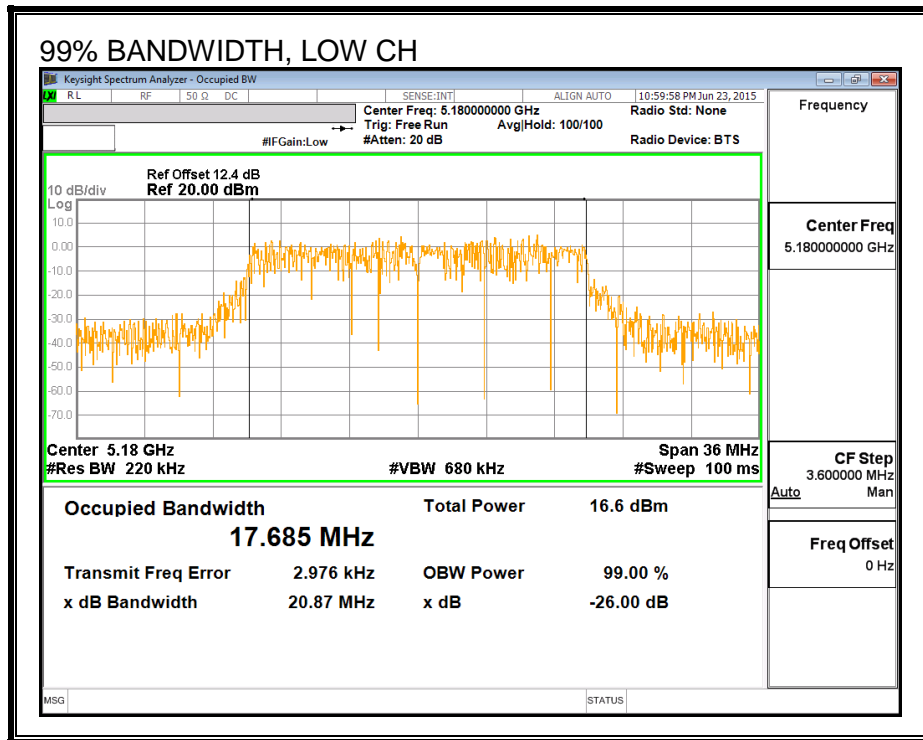

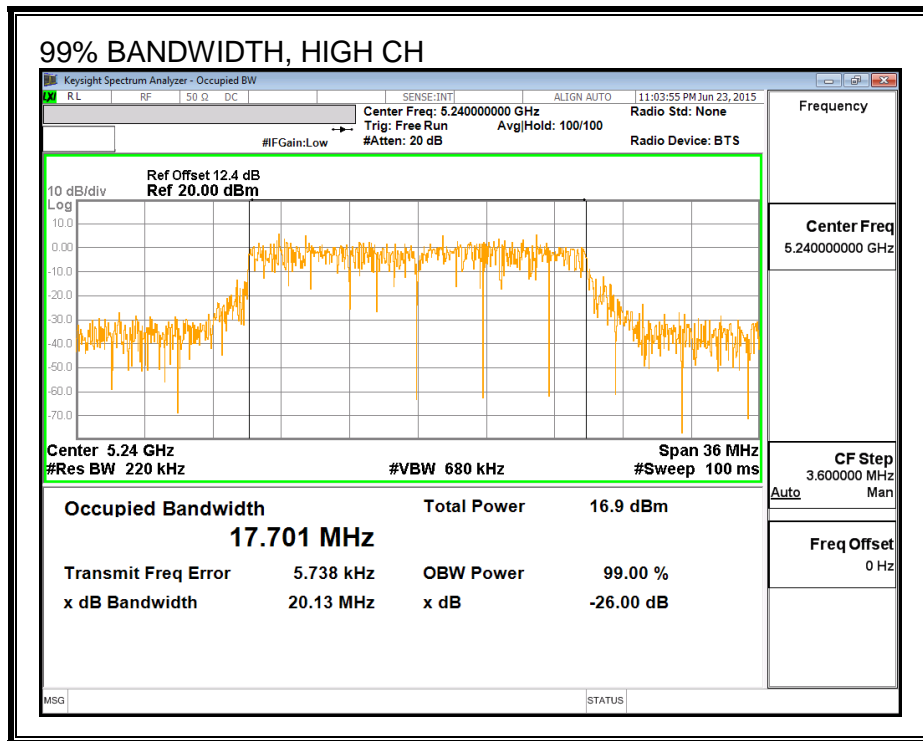

### 8.2.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	16.91
Mid	5200	18.35
High	5240	18.41

## 8.2.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	0.68	0.68	24.00	11.00
Mid	5200	0.68	0.68	24.00	11.00
High	5240	0.68	0.68	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.91	16.91	24.00	-7.09
Mid	5200	18.35	18.35	24.00	-5.65
High	5240	18.41	18.41	24.00	-5.59


**PSD Results**

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	5.46	5.46	11.00	-5.54
Mid	5200	6.81	6.81	11.00	-4.19
High	5240	6.86	6.86	11.00	-4.14

**PSD**

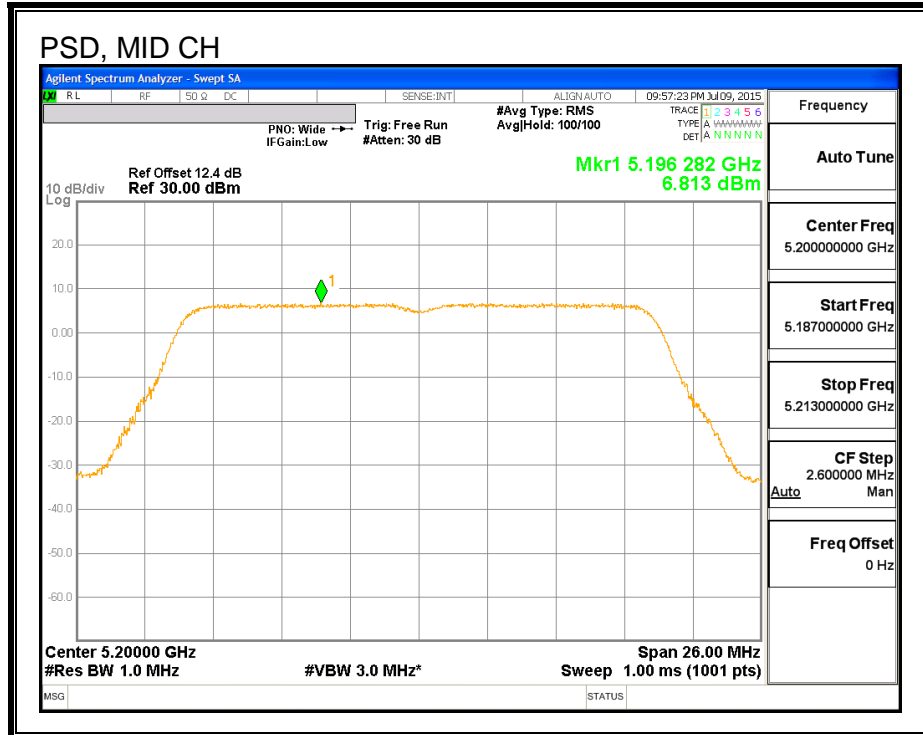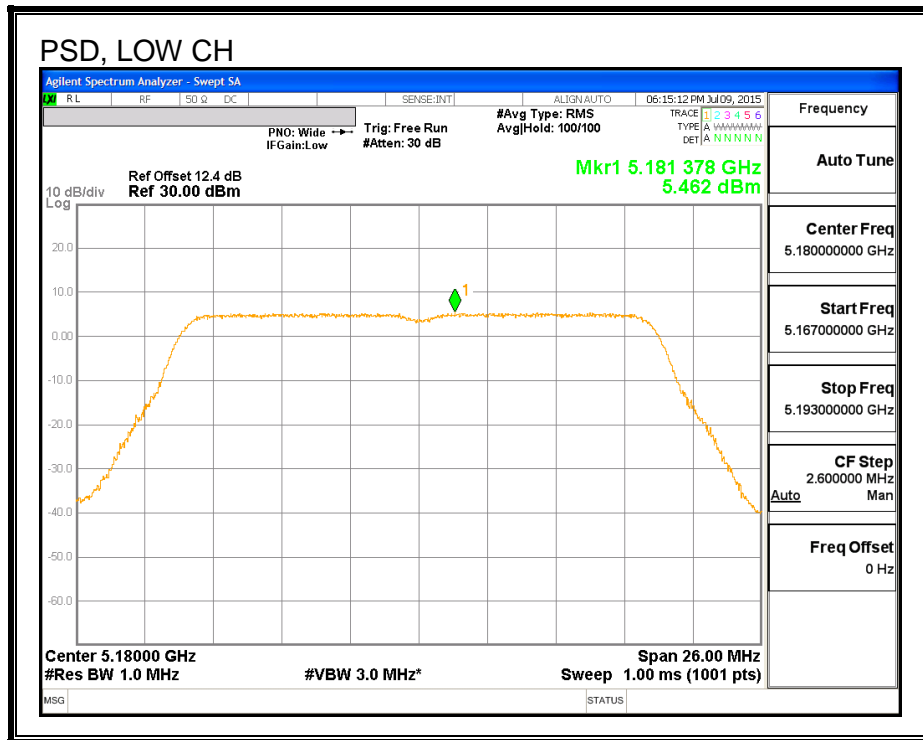



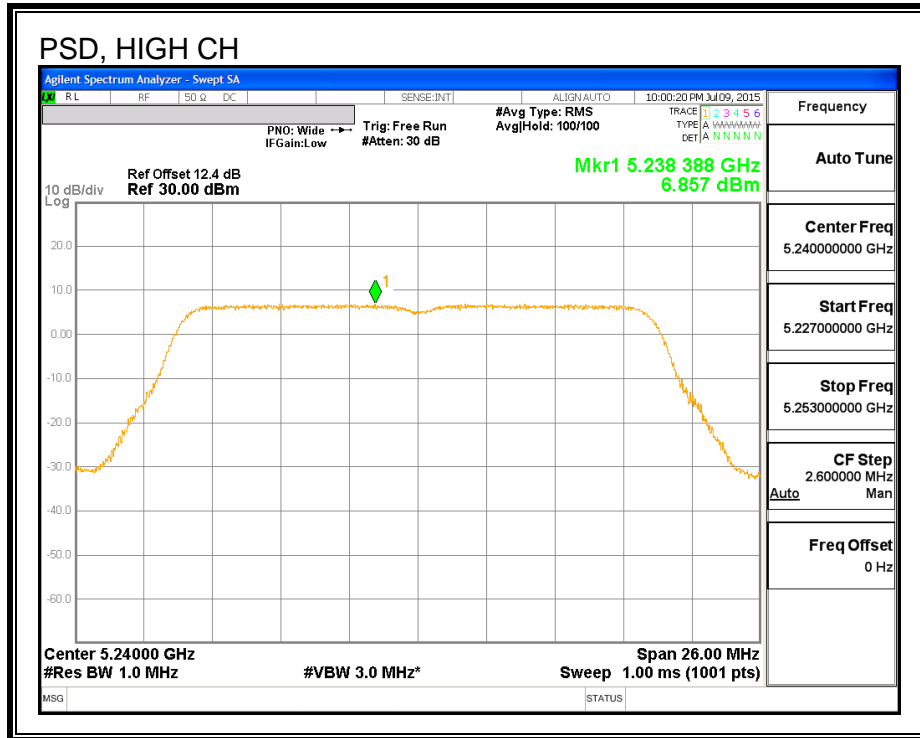

### 8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND

#### 8.3.1. 26 dB BANDWIDTH



##### LIMITS


None; for reporting purposes only.

##### RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	22.00	21.96
Mid	5200	22.16	22.32
High	5240	22.16	22.12



**26 DB BANDWIDTH, CHAIN 0**

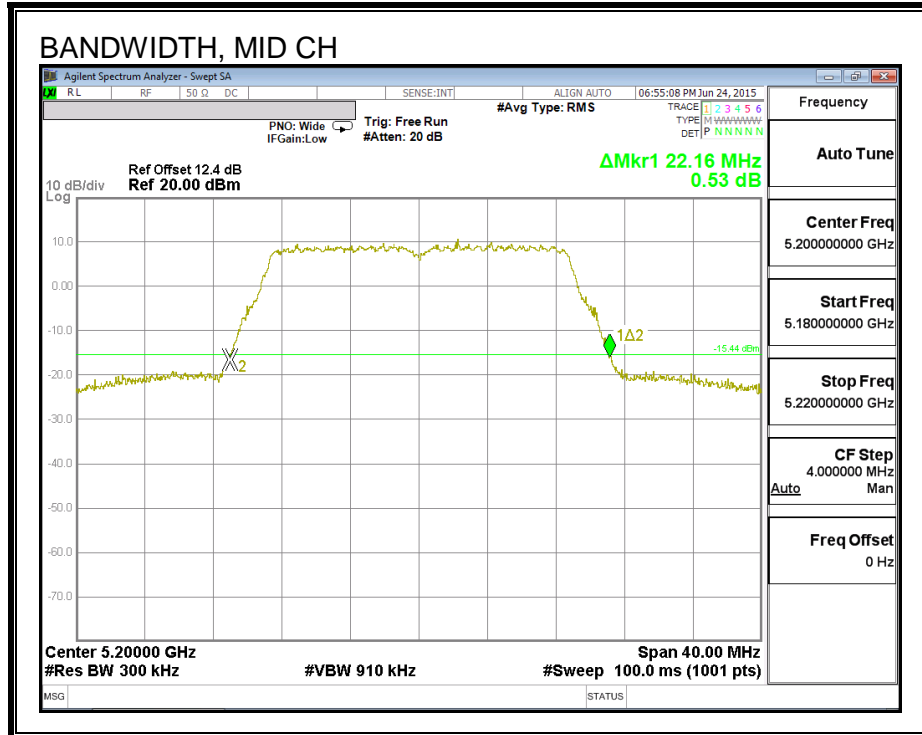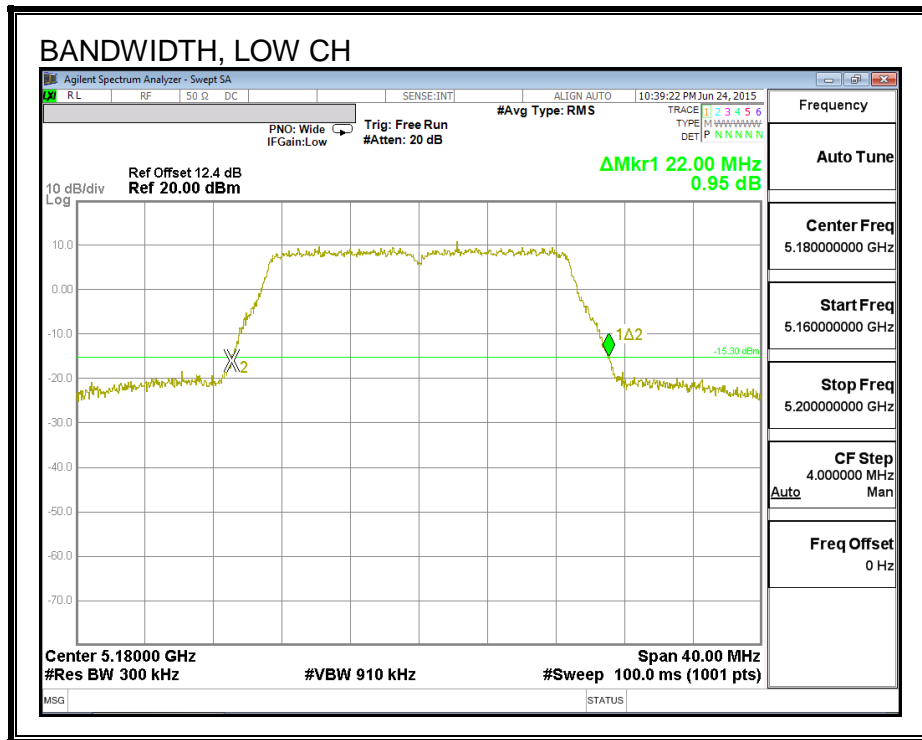

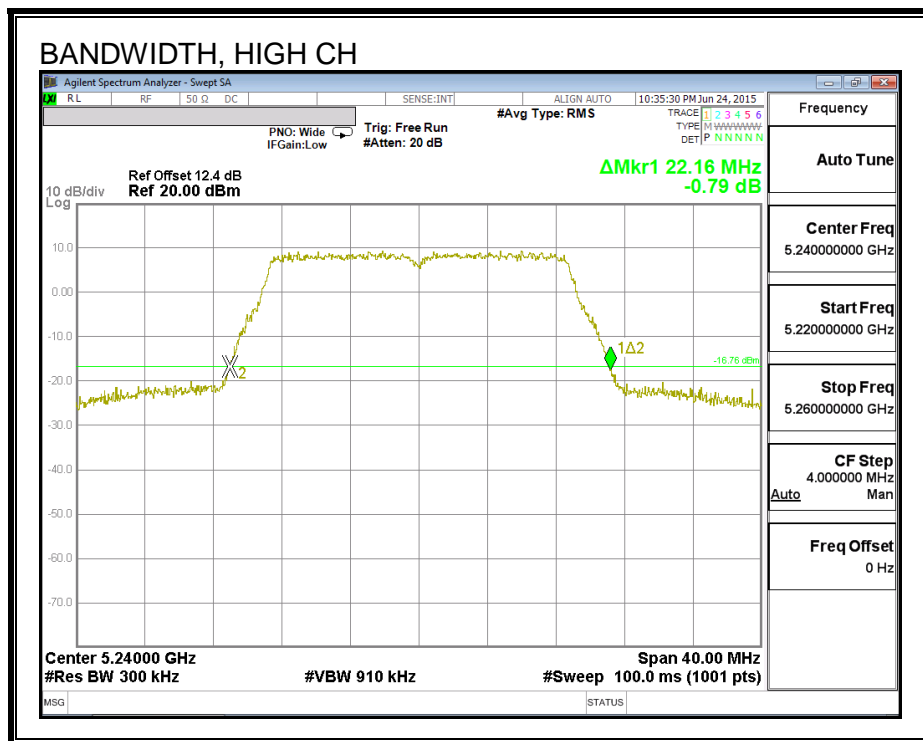

**26 DB BANDWIDTH, CHAIN 1**

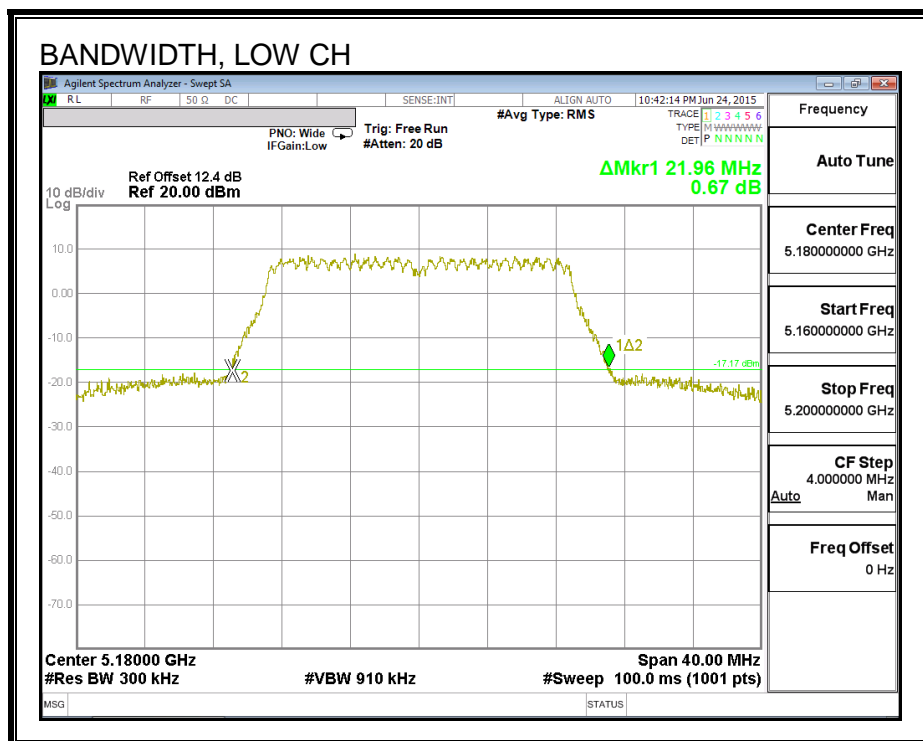

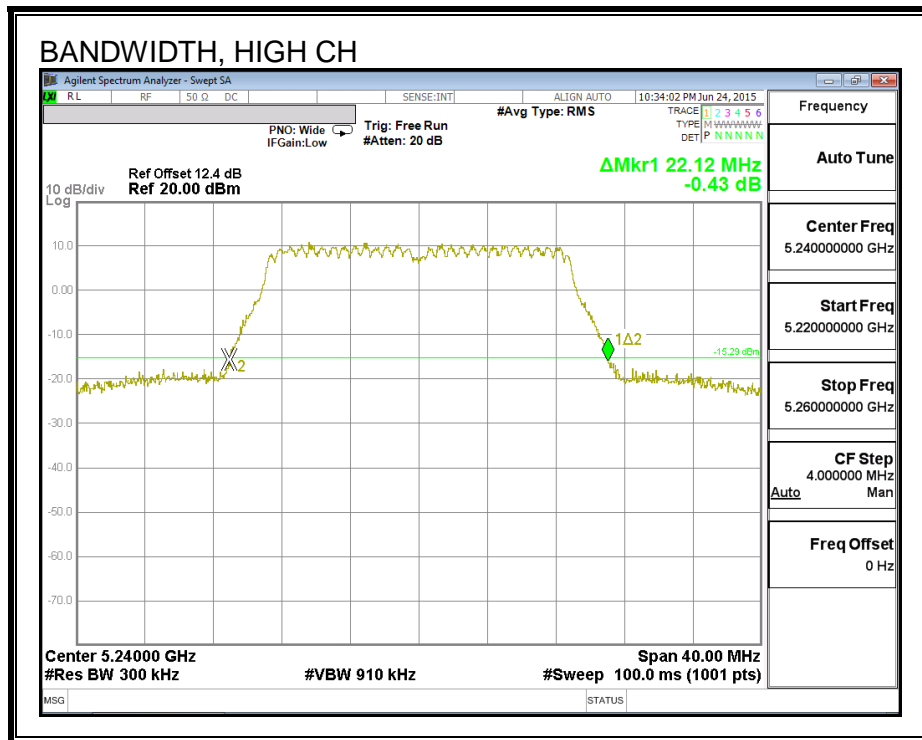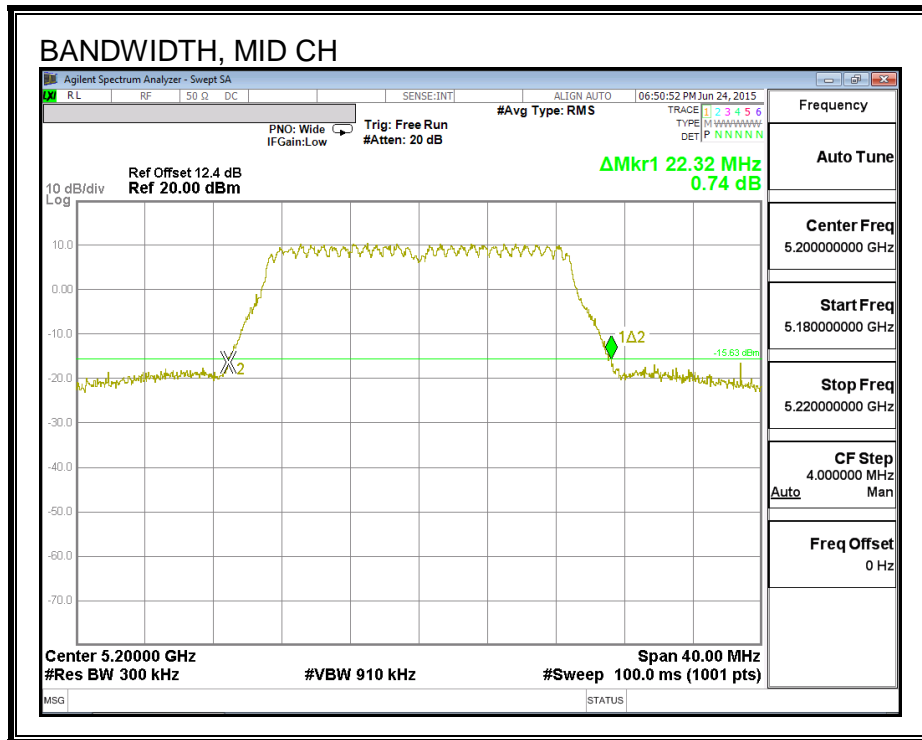

### 8.3.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.834	17.887
Mid	5200	17.910	17.695
High	5240	17.706	17.678

**99% BANDWIDTH, CHAIN 0**

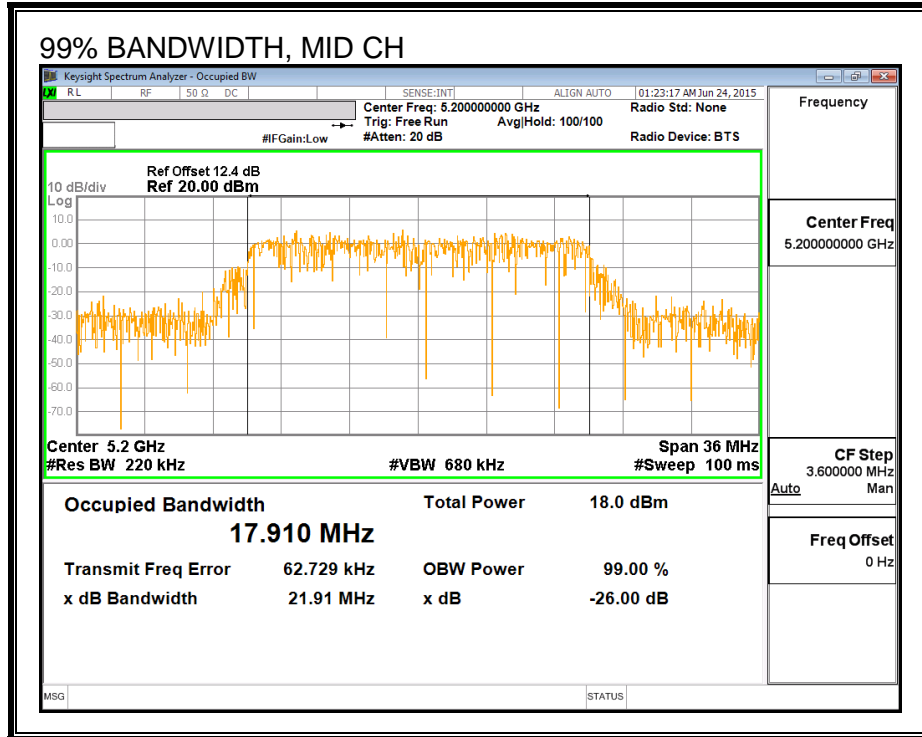
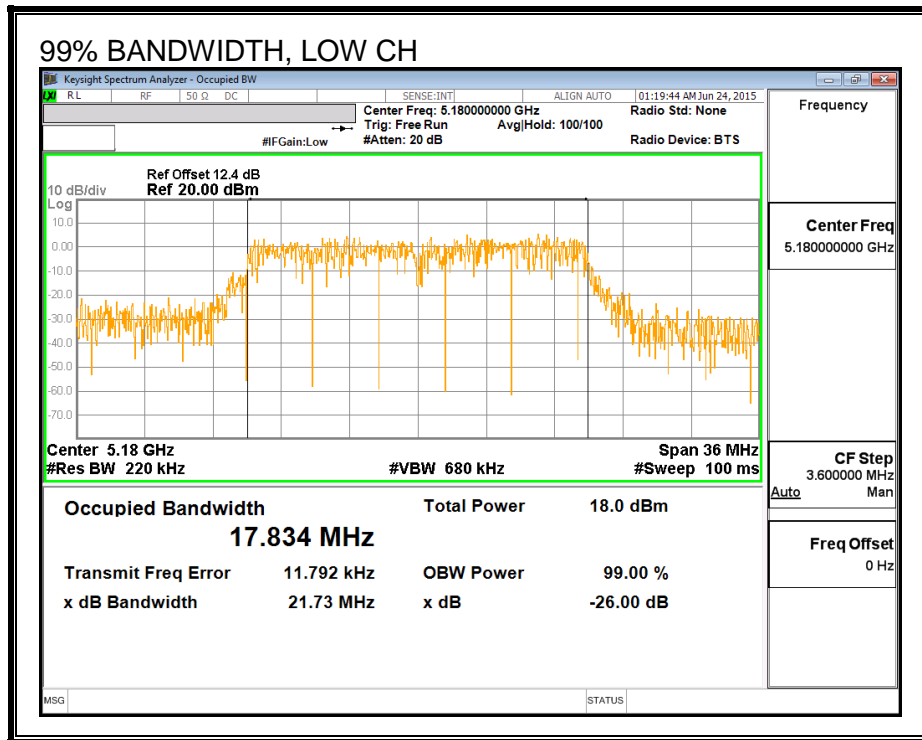


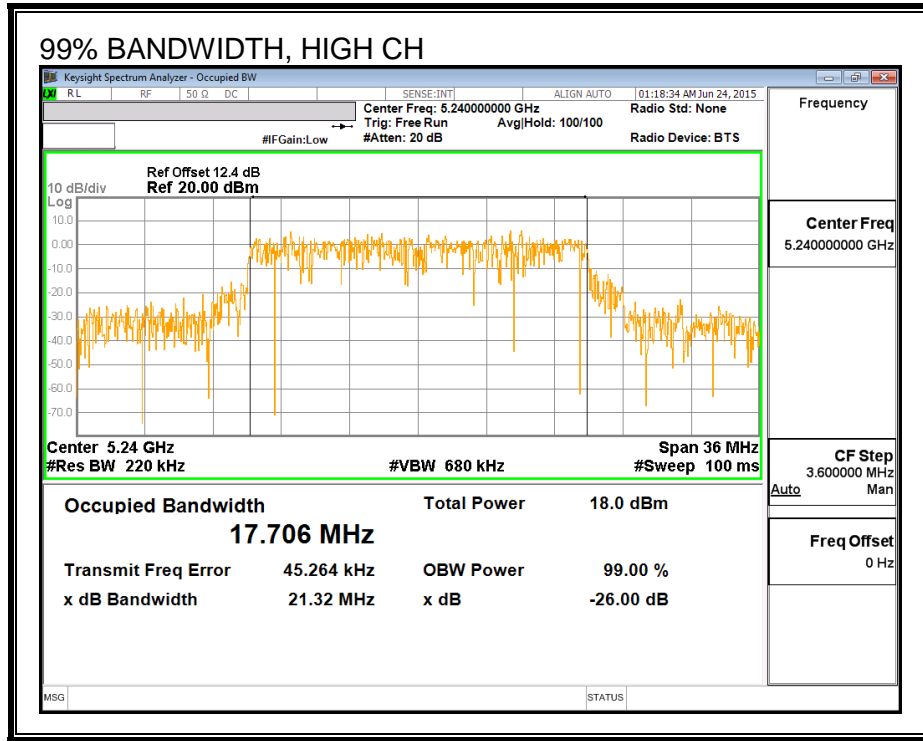

**99% BANDWIDTH, CHAIN 1**

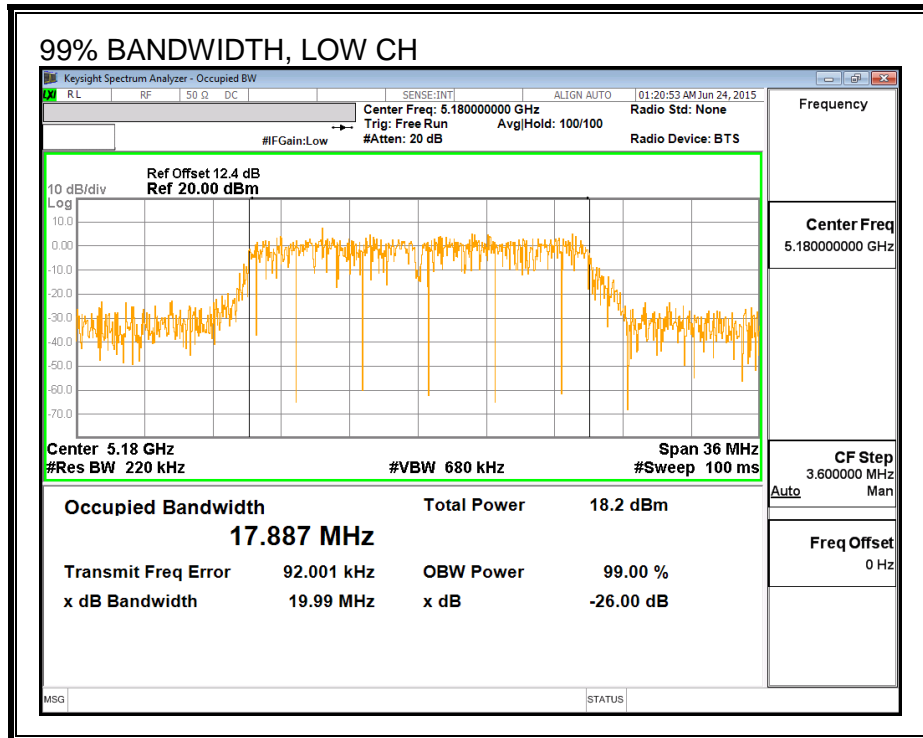



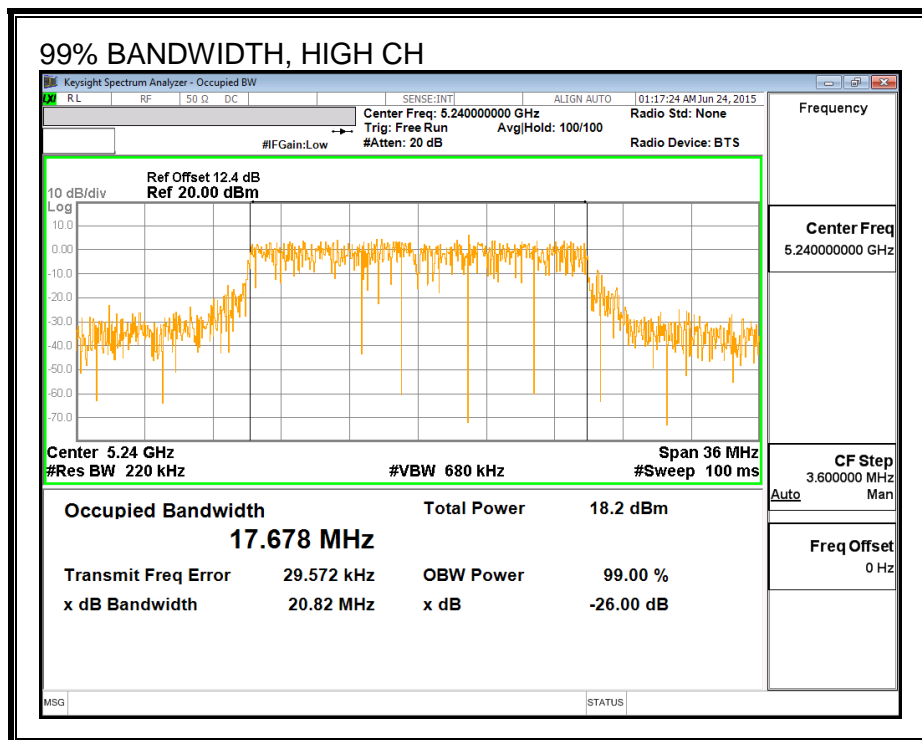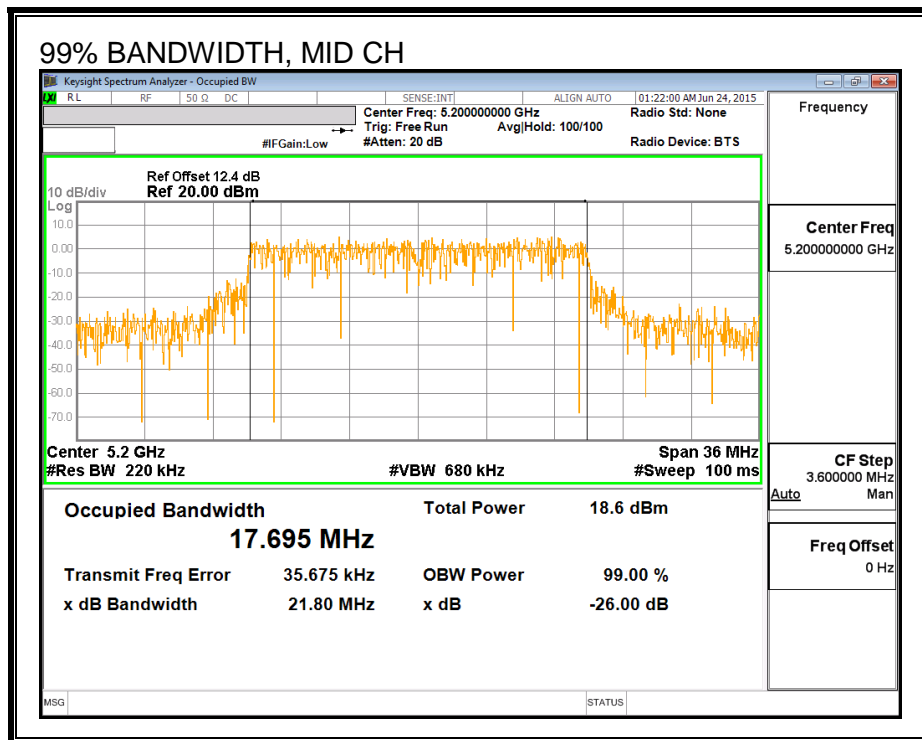

### 8.3.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	16.41	16.50	19.47
Mid	5200	16.98	17.00	20.00
High	5240	16.96	16.99	19.99

### 8.3.4. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-4.08	0.68	-1.08

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
-4.08	0.68	1.63

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-1.08	1.63	24.00	11.00
Mid	5200	-1.08	1.63	24.00	11.00
High	5240	-1.08	1.63	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.41	16.50	19.47	24.00	-4.53
Mid	5200	16.98	17.00	20.00	24.00	-4.00
High	5240	16.96	16.99	19.99	24.00	-4.01

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.91	5.04	7.99	11.00	-3.01
Mid	5200	5.52	5.54	8.54	11.00	-2.46
High	5240	5.52	5.52	8.53	11.00	-2.47



**OUTPUT POWER AND PSD, CHAIN 0**

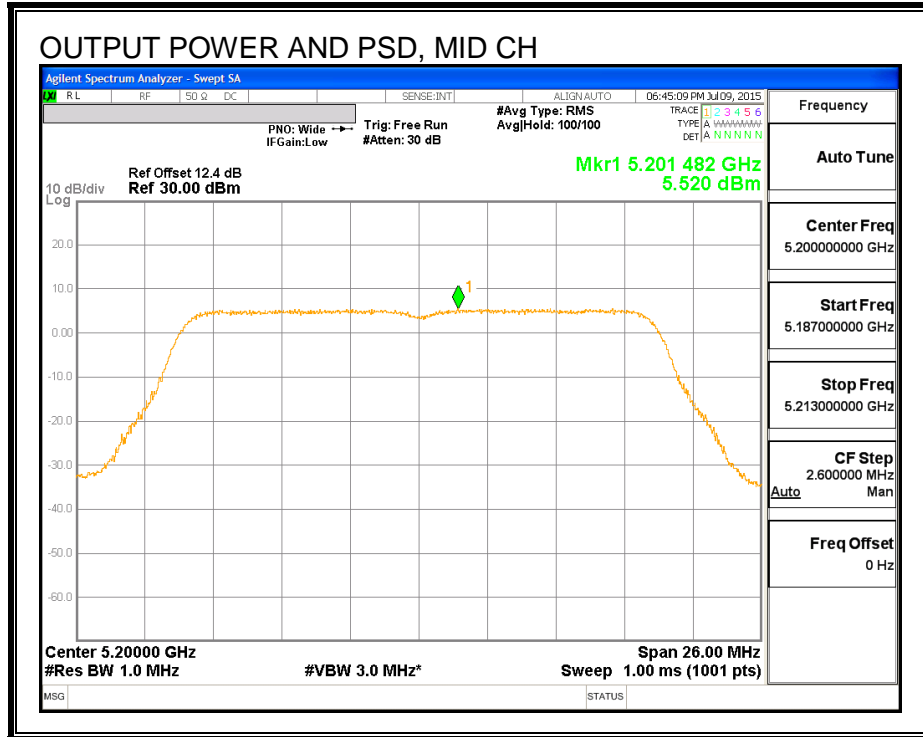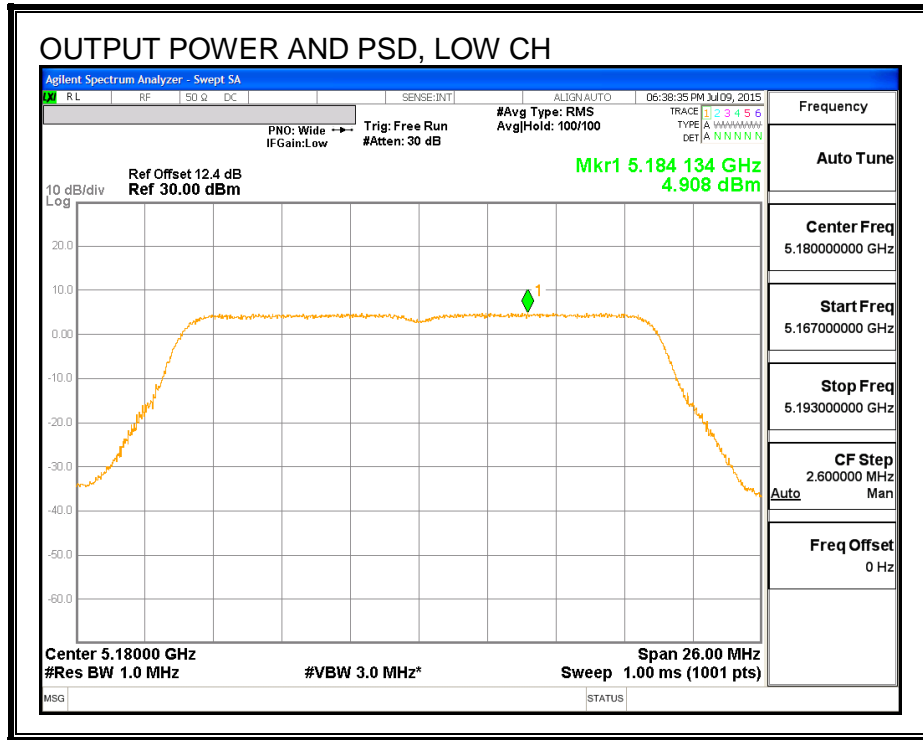

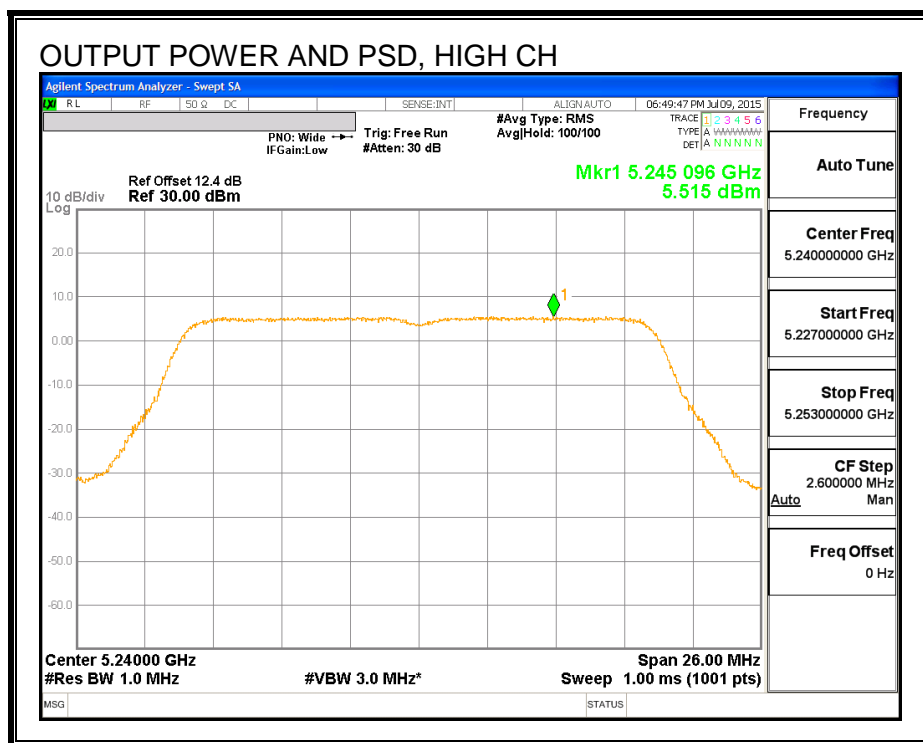

**OUTPUT POWER AND PSD, CHAIN 1**

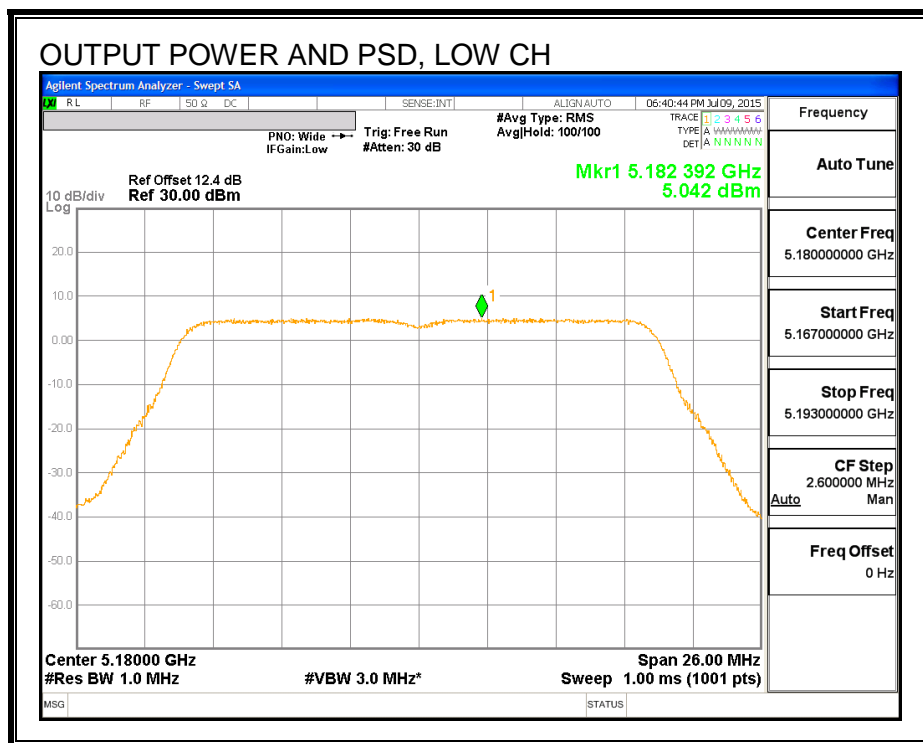

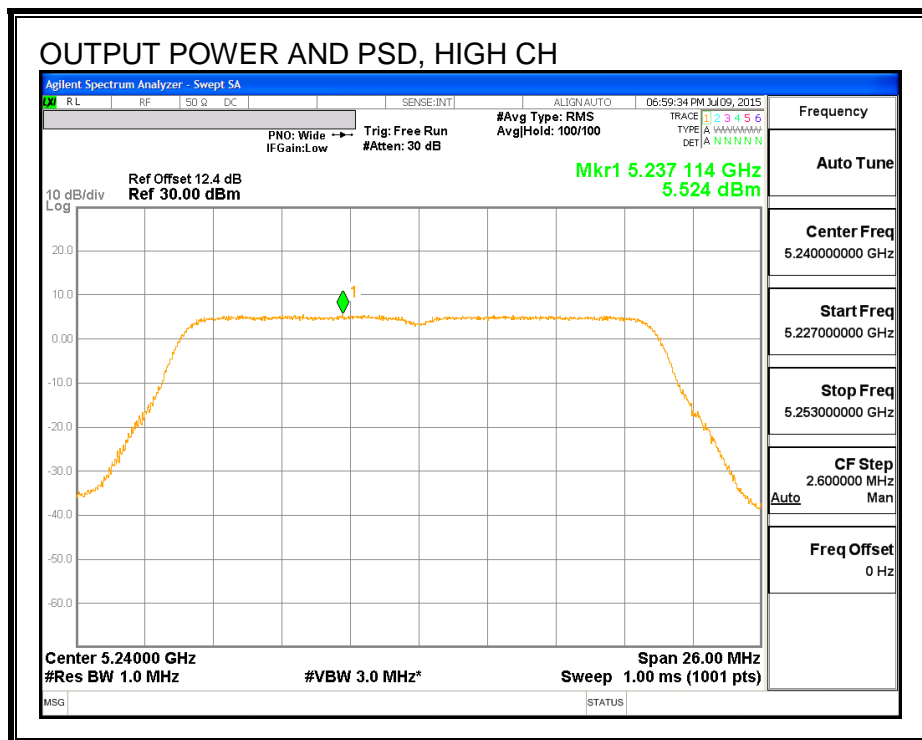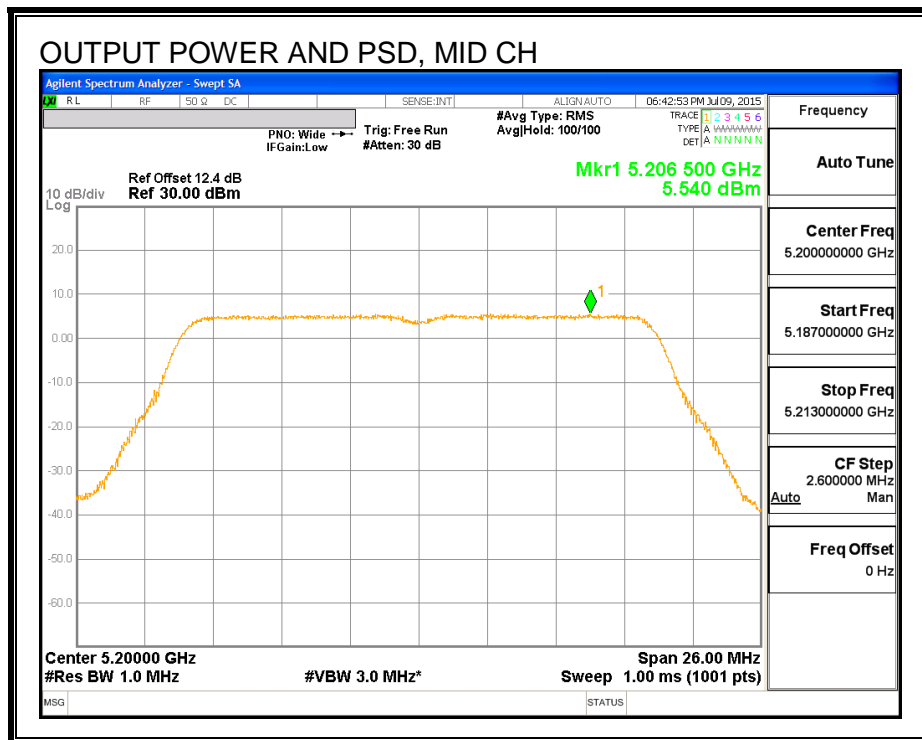



#### **8.4. 802.11n HT20 2Tx STBC MODE IN THE 5.2 GHz BAND**

**Note:** Covered by 802.11n HT20 2Tx CDD MODE

## 8.5. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND

### 8.5.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.67
High	5230	40.88

**26 dB BANDWIDTH**

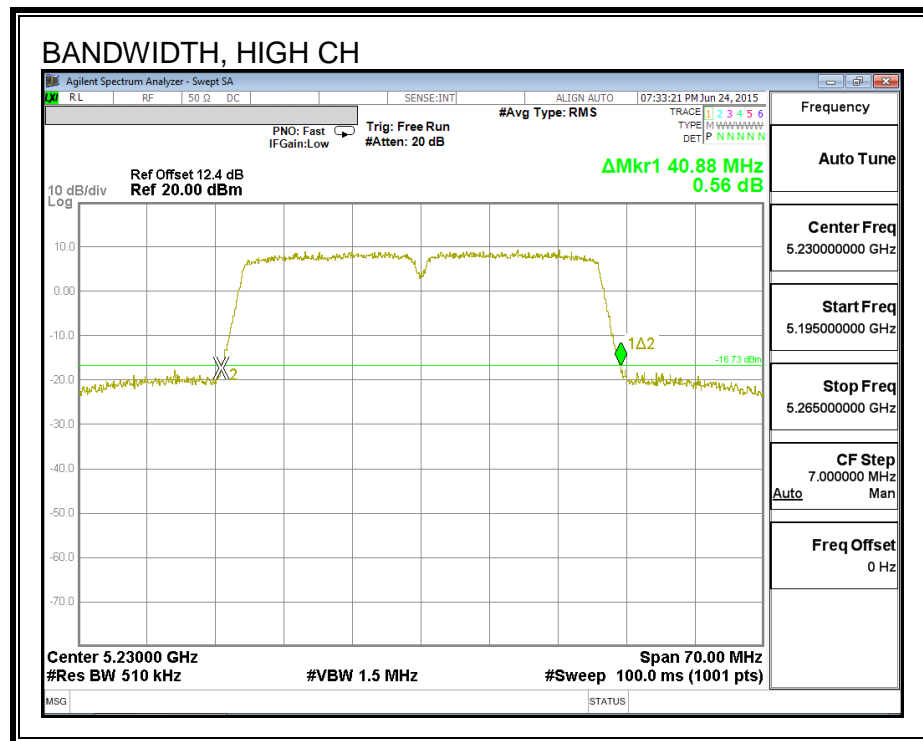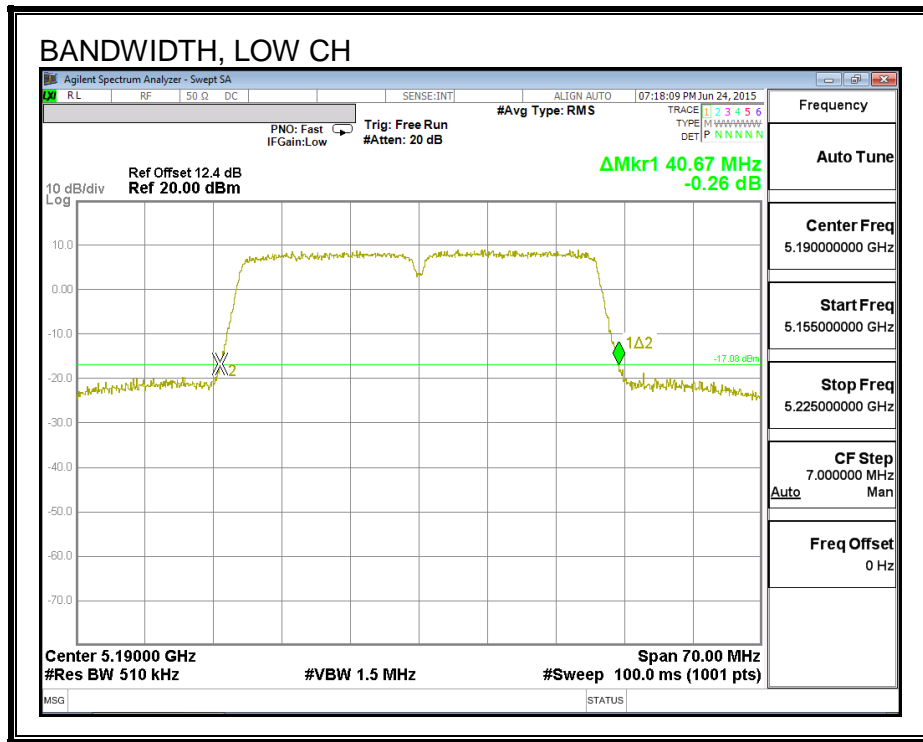

### 8.5.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.256
High	5230	36.352

**99% BANDWIDTH**

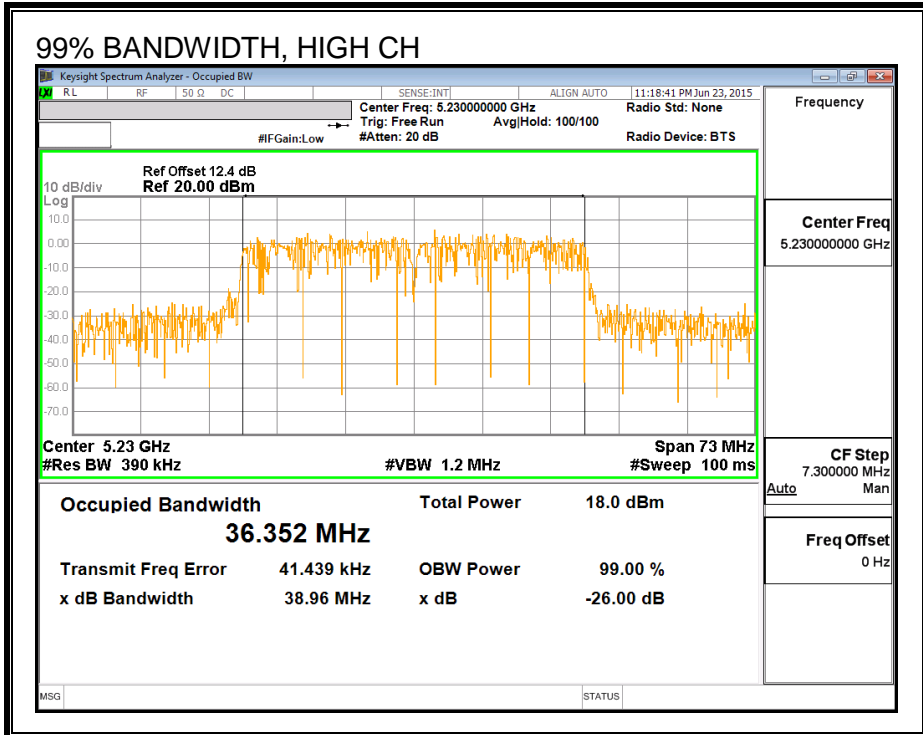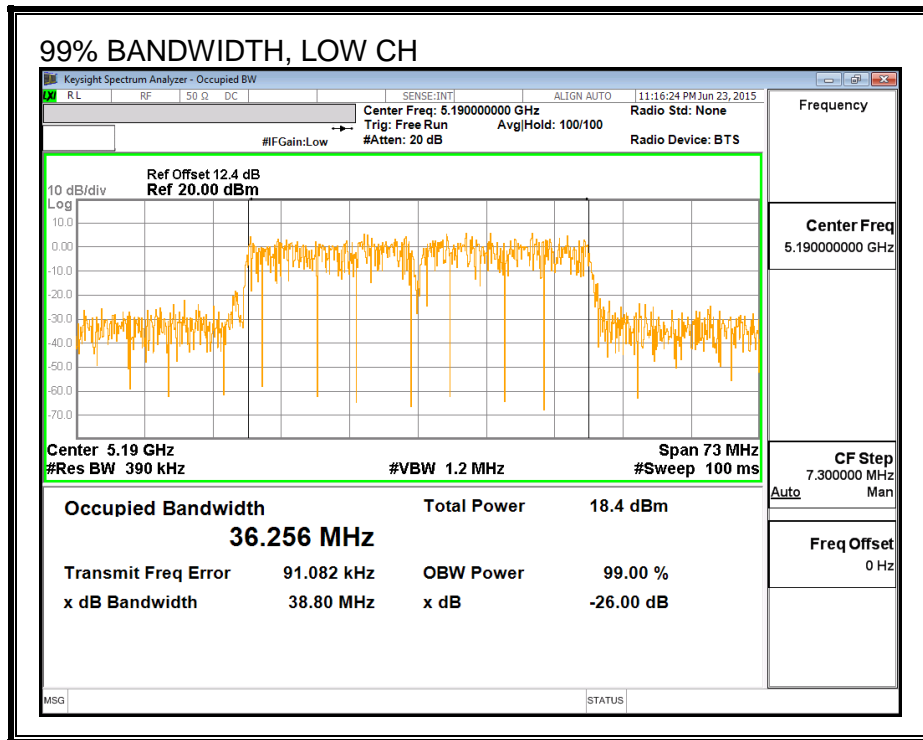

### 8.5.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.48
High	5230	17.44

## 8.5.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-4.08	-4.08	24.00	11.00
High	5230	-4.08	-4.08	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.48	13.48	24.00	-10.52
High	5230	17.44	17.44	24.00	-6.56

**PSD Results**

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.81	-0.81	11.00	-11.81
High	5230	2.93	2.93	11.00	-8.07



**PSD**

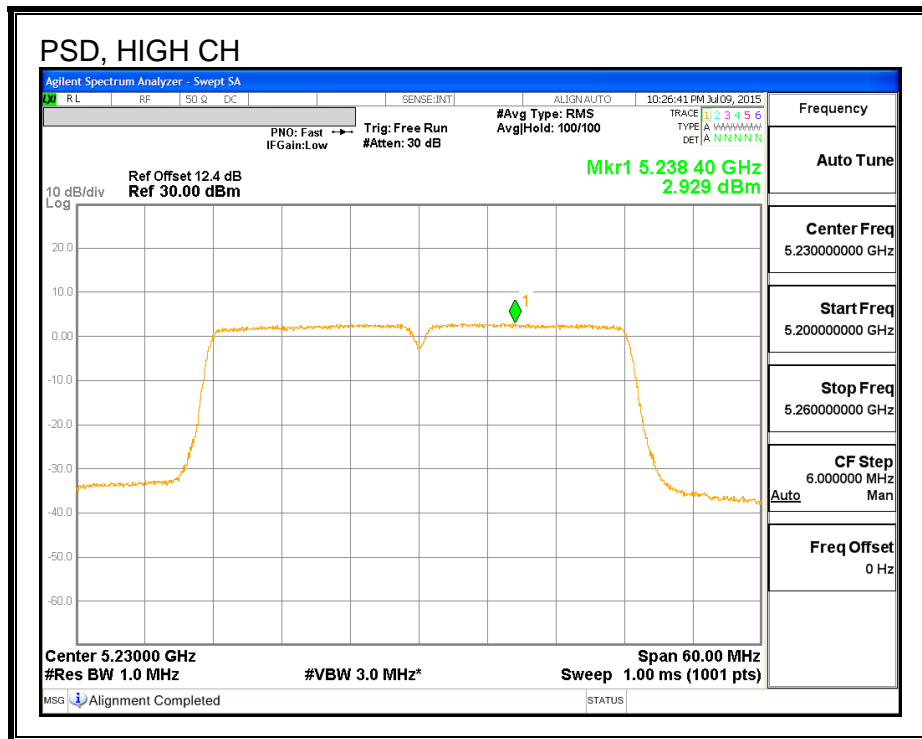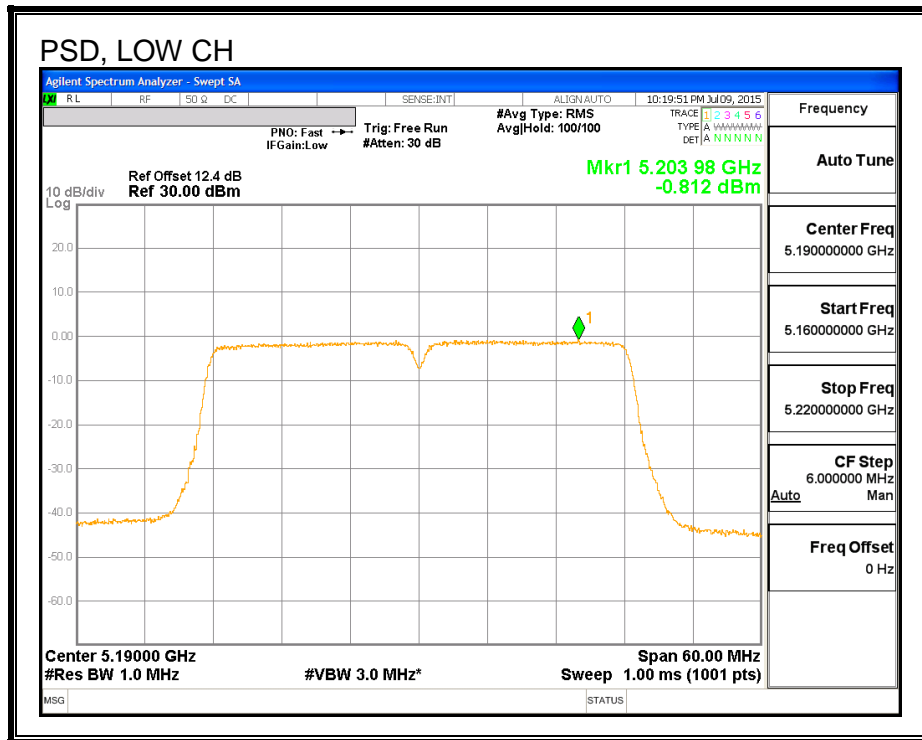

## 8.6. 802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND

### 8.6.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.88
High	5230	41.09

**26 dB BANDWIDTH**

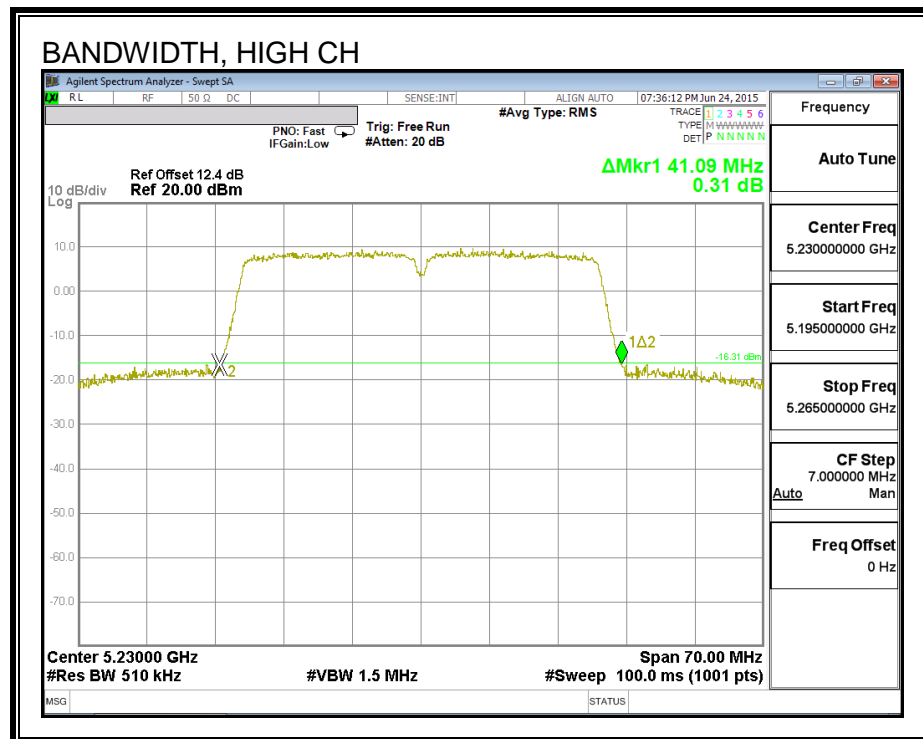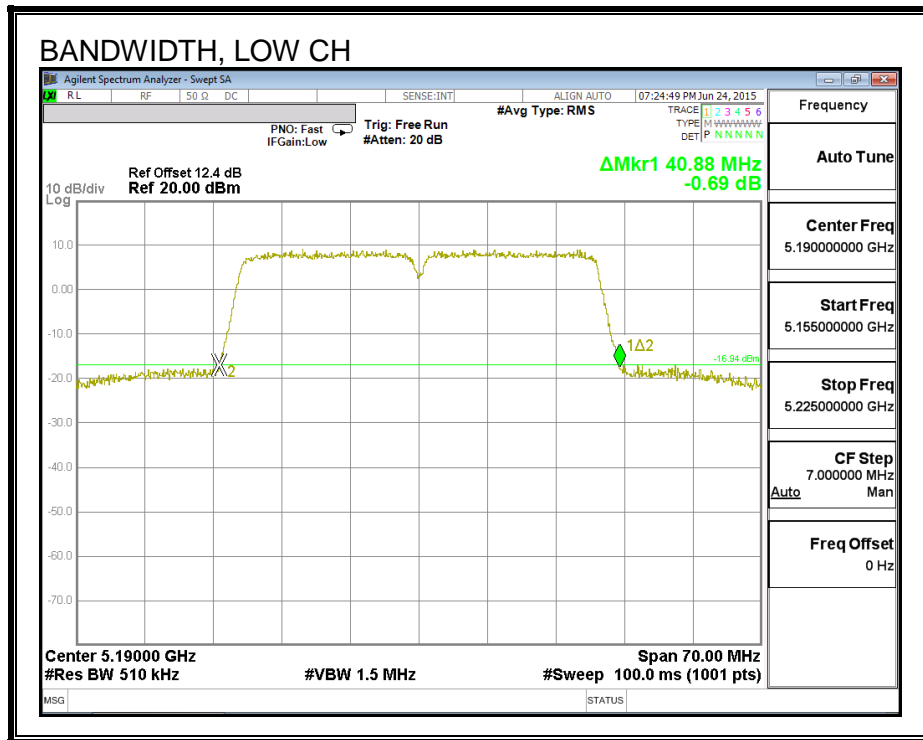

### 8.6.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.194
High	5230	36.144

**99% BANDWIDTH**

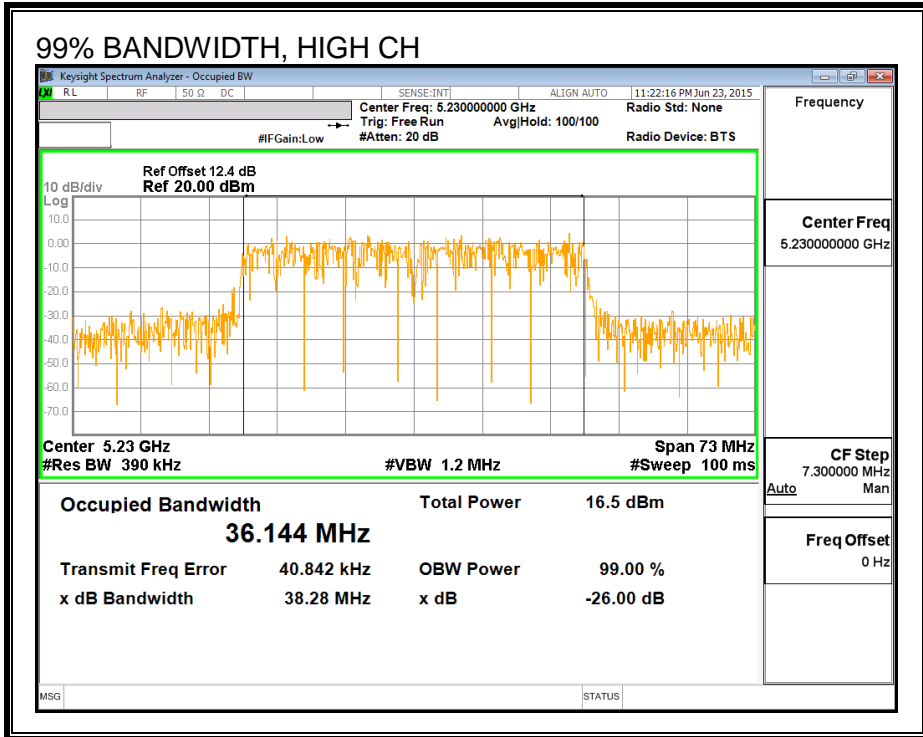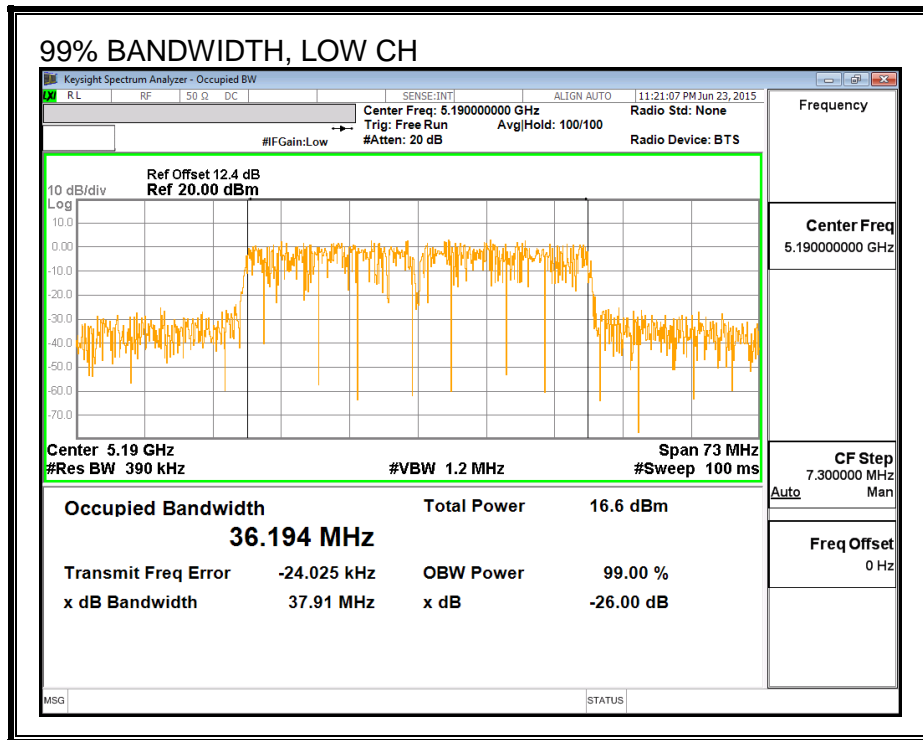

### 8.6.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.49
High	5230	17.92

## 8.6.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	0.68	0.68	24.00	11.00
High	5230	0.68	0.68	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.49	13.49	24.00	-10.51
High	5230	17.92	17.92	24.00	-6.08

**PSD Results**

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.73	-0.73	11.00	-11.73
High	5230	3.54	3.54	11.00	-7.46



**PSD**

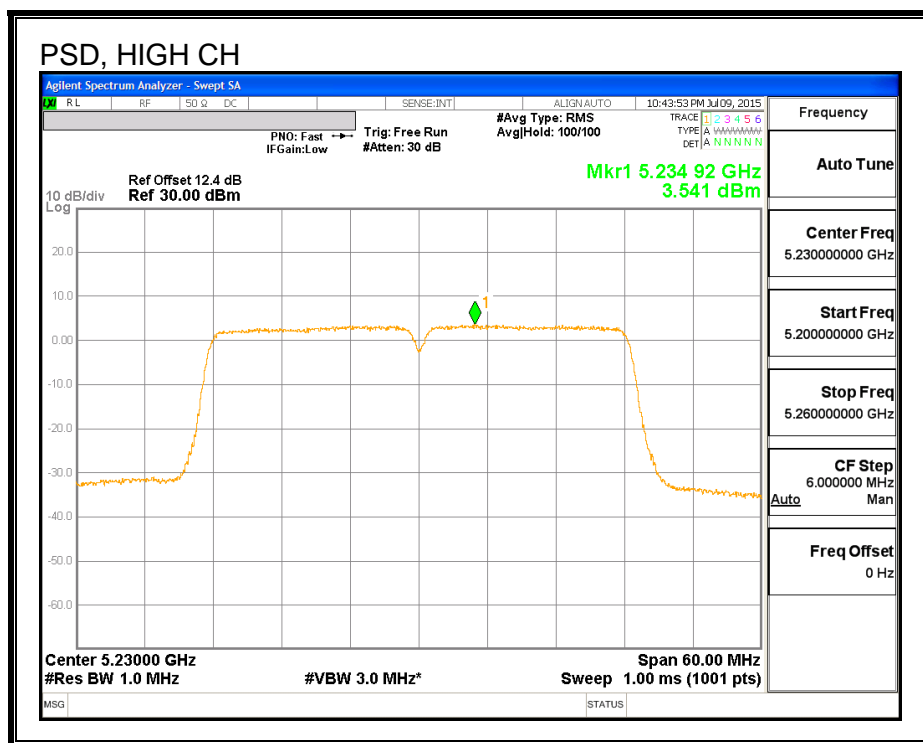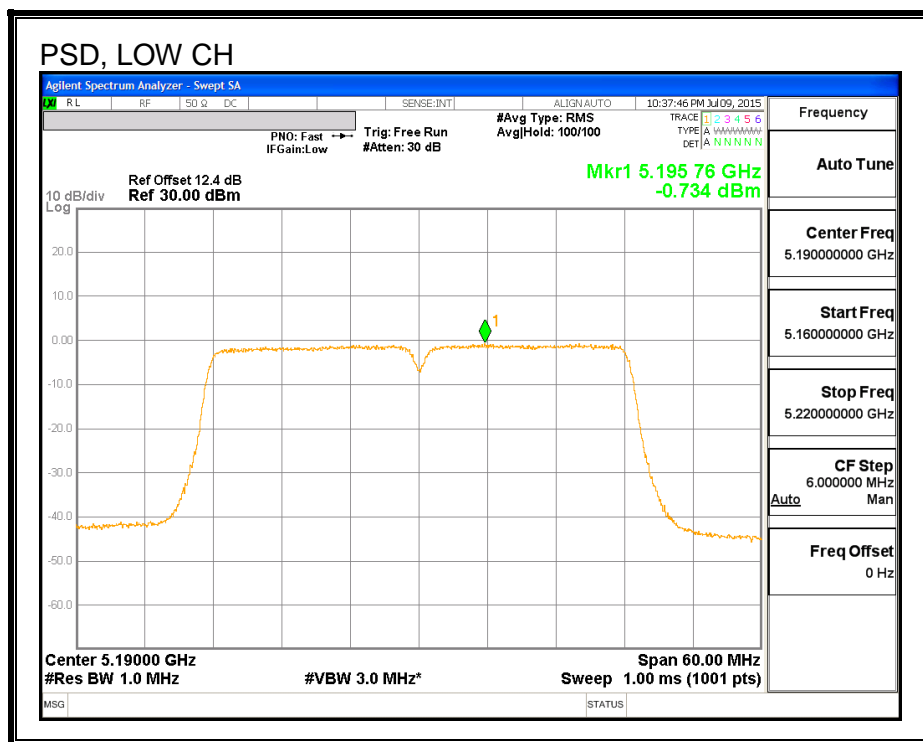

## 8.7. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND

### 8.7.1. 26 dB BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.74	40.39
High	5230	40.95	40.32





### 8.7.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.



#### RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.110	36.439
High	5230	36.376	36.392

**99% BANDWIDTH, CHAIN 0**

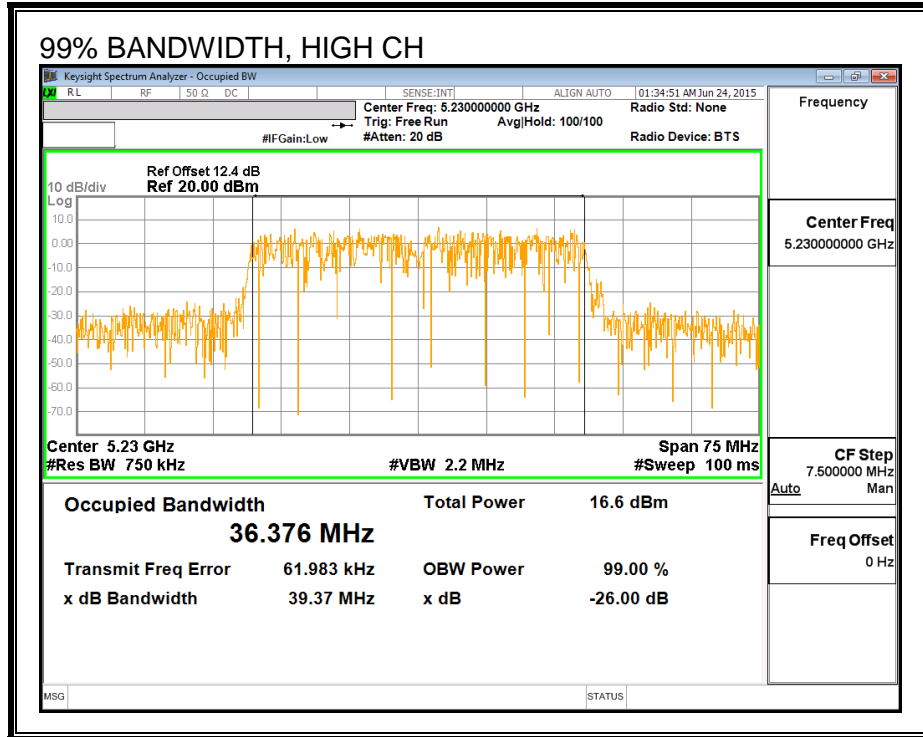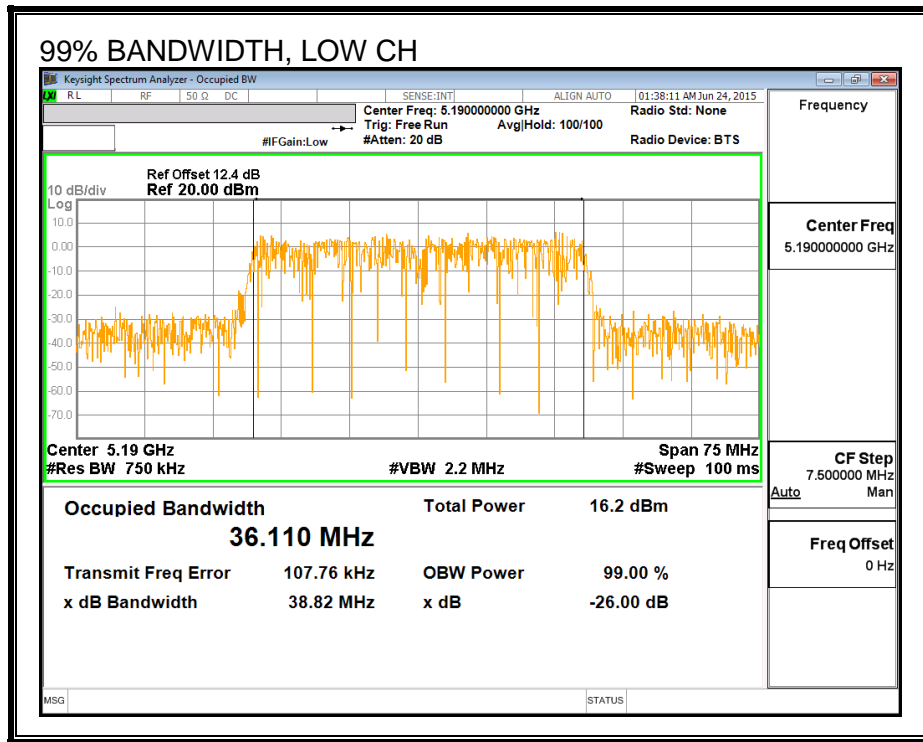

**99% BANDWIDTH, CHAIN 1**

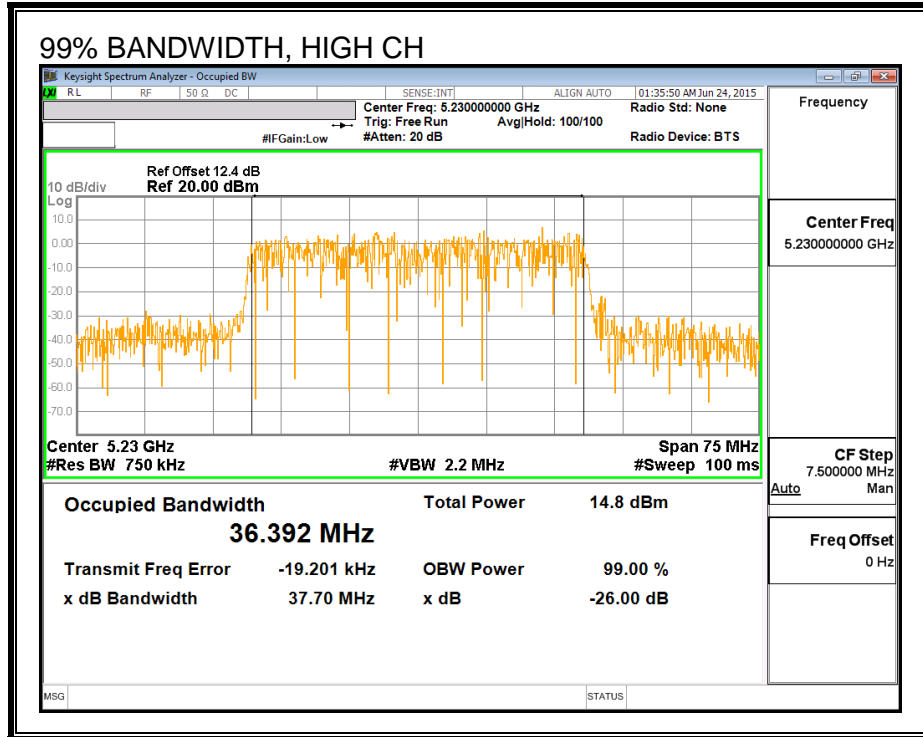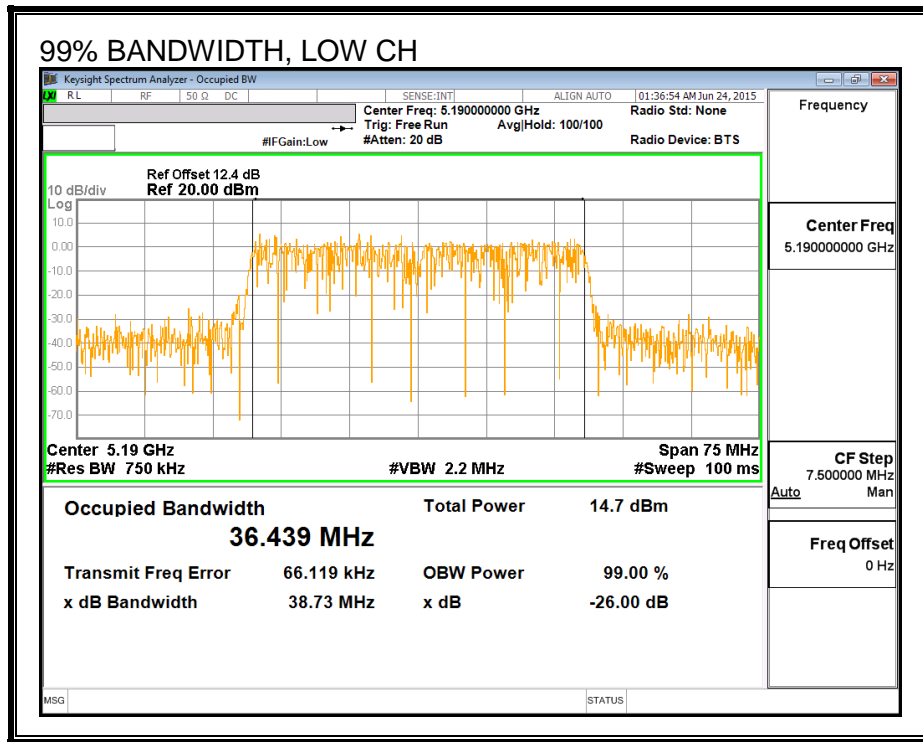

### 8.7.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	13.48	13.49	16.50
High	5230	17.50	17.87	20.70



## 8.7.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-4.08	0.68	-1.08

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
-4.08	0.68	1.63

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-1.08	1.63	24.00	11.00
High	5230	-1.08	1.63	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.48	13.49	16.50	24.00	-7.50
High	5230	17.50	17.87	20.70	24.00	-3.30



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.81	-0.79	2.21	11.00	-8.79
High	5230	3.23	3.47	6.36	11.00	-4.64

**OUTPUT POWER AND PSD, CHAIN 0**

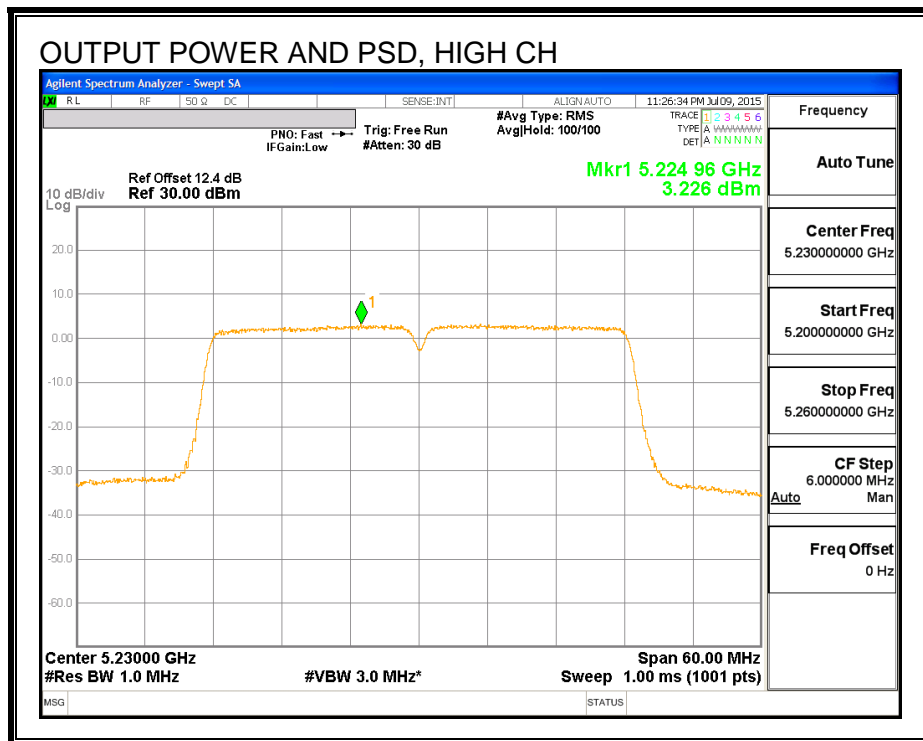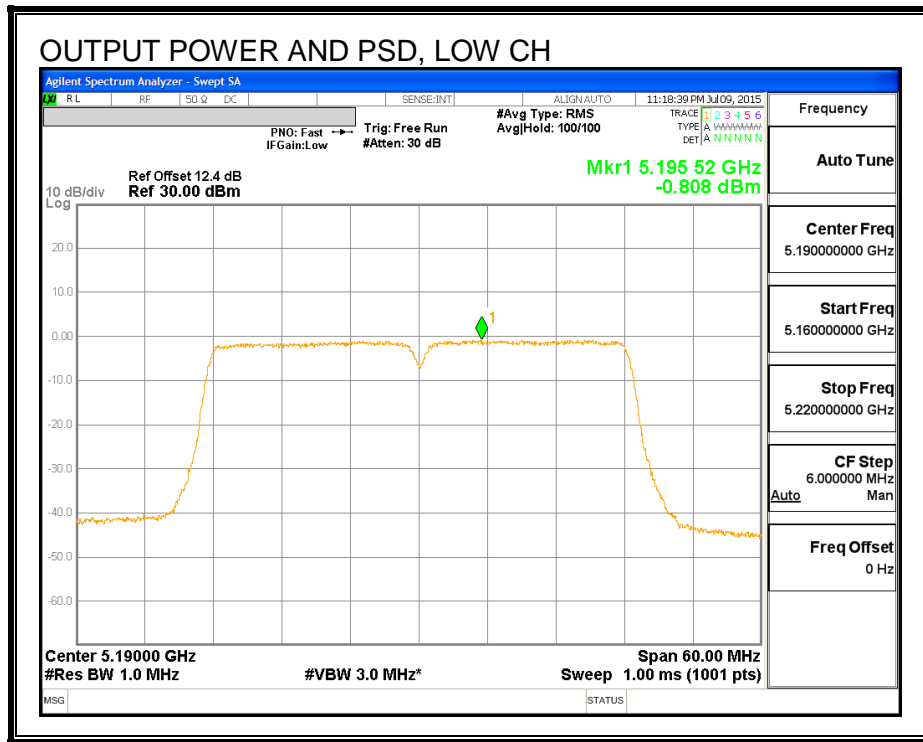

**OUTPUT POWER AND PSD, CHAIN 1**

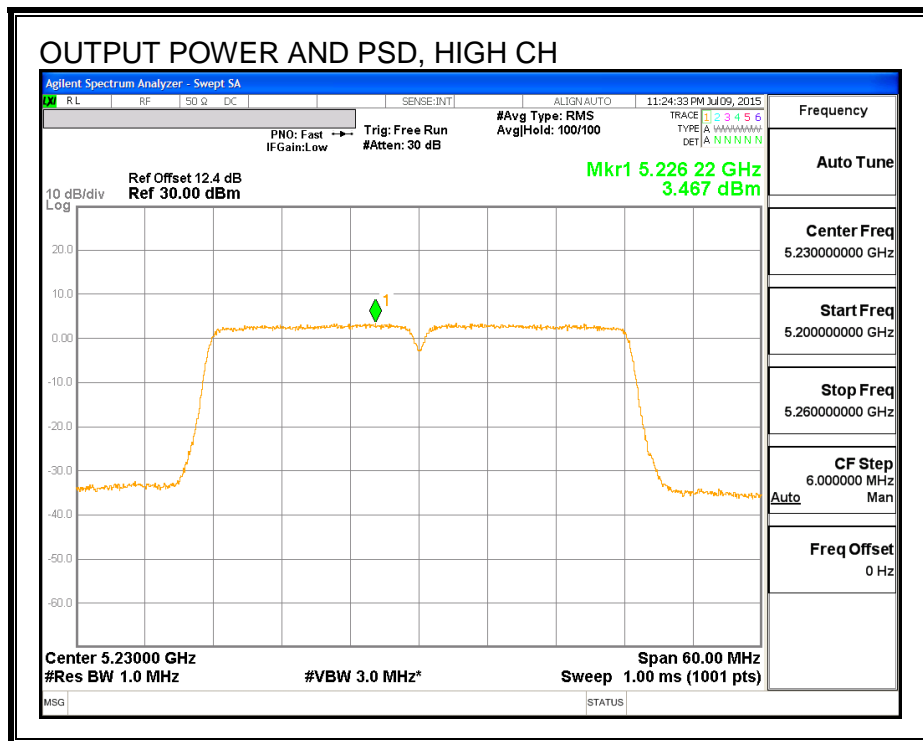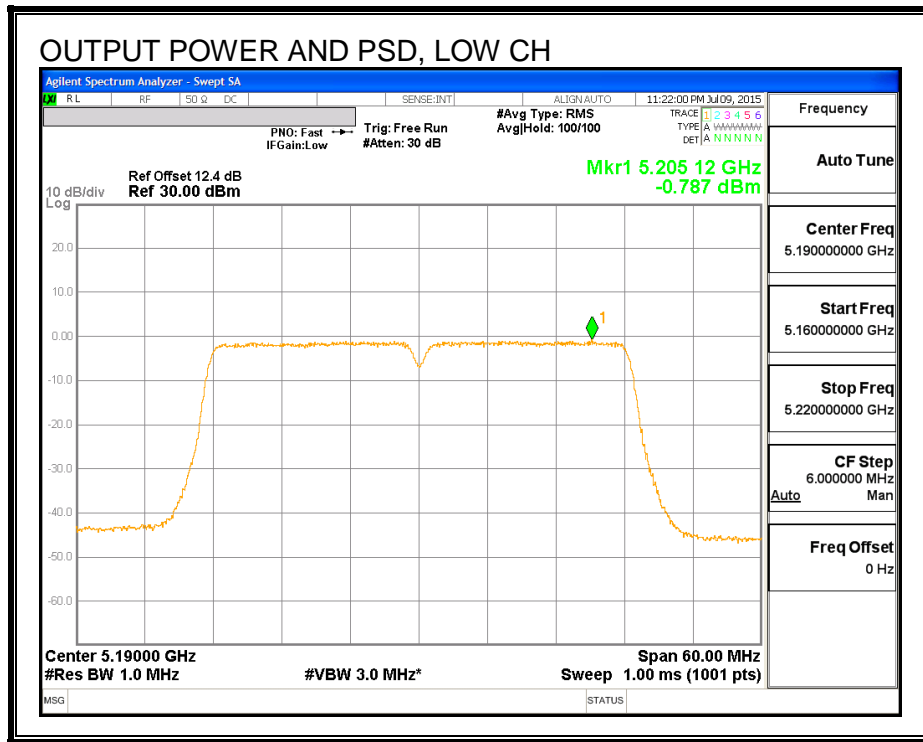

**8.8. 802.11n HT40 2Tx STBC MODE IN THE 5.2 GHz BAND**

**Note:** Covered by 802.11n HT40 2Tx CDD MODE

## 8.9. 802.11ac HT80 CHAIN 0 MODE IN THE 5.2 GHz BAND

### 8.9.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.32

**26 dB BANDWIDTH**

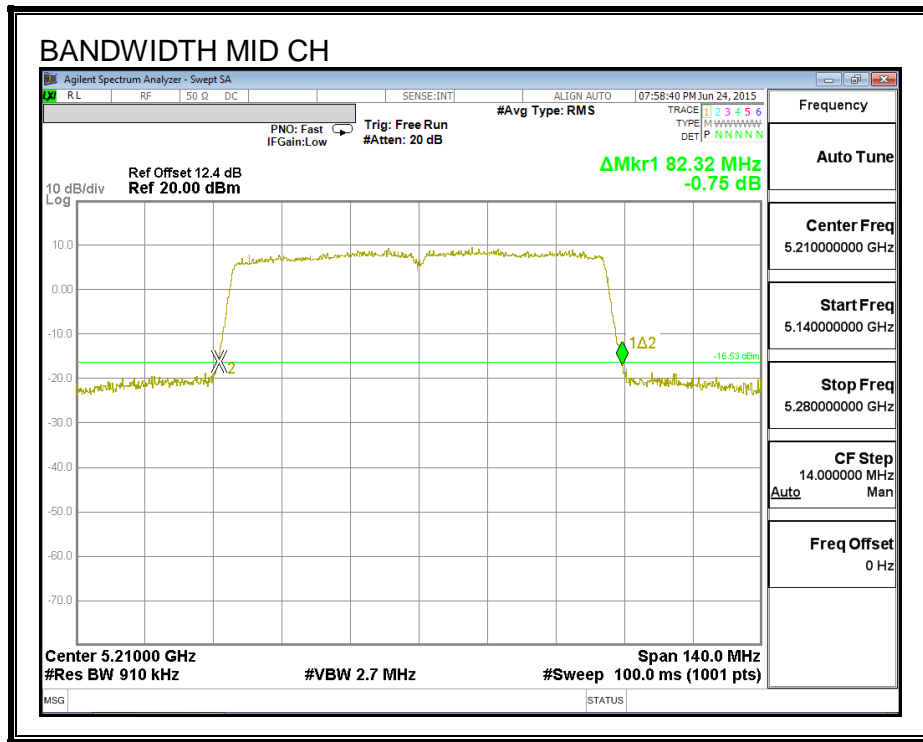



### 8.9.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.834

**99% BANDWIDTH**

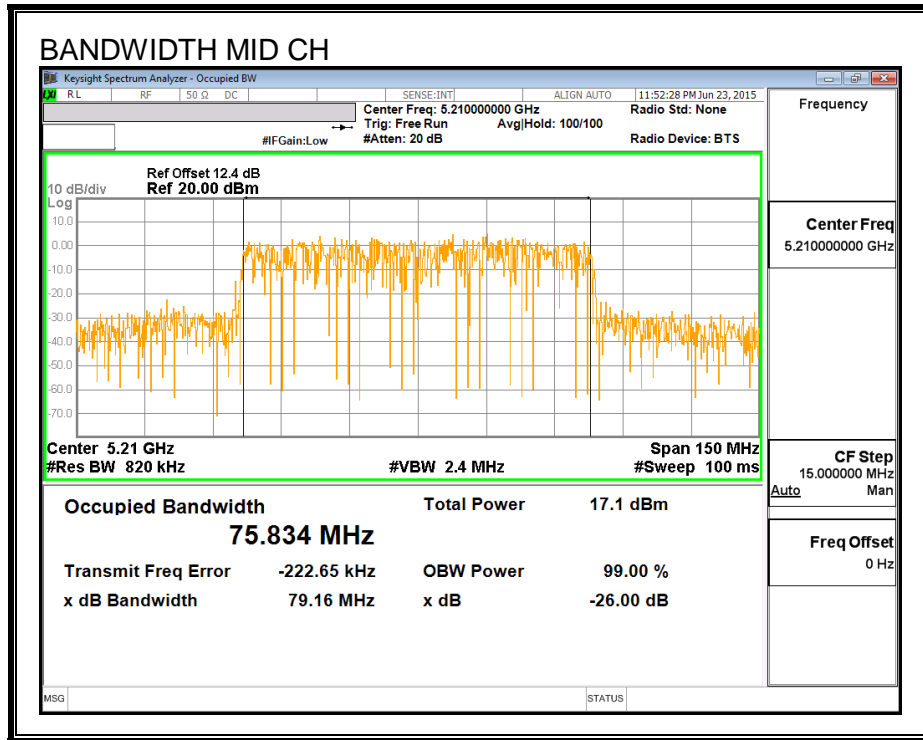

### 8.9.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	13.32

## 8.9.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.