



FCC 47 CFR PART 15 SUBPART E
CERTIFICATION TEST REPORT
FOR
CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBER: A1661, A1786

FCC ID: BCG-E3087A

REPORT NUMBER: 16U23287-E4V4

ISSUE DATE: AUGUST 03, 2016

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	7/29/2016	Initial Review	Chin Pang
V2	7/30/2016	Addressed TCB Questions	Tony Li
V3	8/01/2016	Addressed TCB Questions	Tina Chu
V4	8/03/2016	Addressed TCB Questions	Tina Chu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	11
2. TEST METHODOLOGY	12
3. FACILITIES AND ACCREDITATION	12
4. CALIBRATION AND UNCERTAINTY	13
4.1. MEASURING INSTRUMENT CALIBRATION	13
4.2. SAMPLE CALCULATION	13
4.3. MEASUREMENT UNCERTAINTY	13
5. EQUIPMENT UNDER TEST.....	14
5.1. DESCRIPTION OF EUT.....	14
5.2. MAXIMUM OUTPUT POWER	14
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	17
5.4. SOFTWARE AND FIRMWARE	17
5.5. WORST-CASE CONFIGURATION AND MODE.....	18
5.6. DESCRIPTION OF TEST SETUP	20
6. TEST AND MEASUREMENT EQUIPMENT	26
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	27
7.1. ON TIME AND DUTY CYCLE.....	27
7.2. MEASUREMENT METHODS.....	31
8. ANTENNA PORT TEST RESULTS.....	32
8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND	32
8.1.1. 26 dB BANDWIDTH	32
8.1.2. 99% BANDWIDTH.....	35
8.1.3. AVERAGE POWER.....	38
8.1.4. OUTPUT POWER AND PSD	39
8.2. 802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND	43
8.2.1. 26 dB BANDWIDTH	43
8.2.2. 99% BANDWIDTH.....	46
8.2.3. AVERAGE POWER.....	49
8.2.4. OUTPUT POWER AND PSD	50
8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND	54
8.3.1. 26 dB BANDWIDTH	54
8.3.2. 99% BANDWIDTH.....	58
8.3.3. AVERAGE POWER.....	62
8.3.4. OUTPUT POWER AND PSD	63
8.4. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND	69
8.4.1. 26 dB BANDWIDTH	69
8.4.2. 99% BANDWIDTH.....	71

8.4.3.	AVERAGE POWER.....	73
8.4.4.	OUTPUT POWER AND PSD	74
8.5.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND</i>	<i>77</i>
8.5.1.	26 dB BANDWIDTH	77
8.5.2.	99% BANDWIDTH.....	79
8.5.3.	AVERAGE POWER.....	81
8.5.4.	OUTPUT POWER AND PSD	82
8.6.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND</i>	<i>85</i>
8.6.1.	26 dB BANDWIDTH	85
8.6.2.	99% BANDWIDTH.....	88
8.6.3.	AVERAGE POWER.....	91
8.6.4.	OUTPUT POWER AND PSD	92
8.7.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.2 GHz BAND</i>	<i>97</i>
8.7.1.	26 dB BANDWIDTH	97
8.7.2.	99% BANDWIDTH.....	98
8.7.3.	AVERAGE POWER.....	99
8.7.4.	OUTPUT POWER AND PSD	100
8.8.	<i>802.11ac VHT80 CHAIN 1 MODE IN THE 5.2 GHz BAND</i>	<i>103</i>
8.8.1.	26 dB BANDWIDTH	103
8.8.2.	99% BANDWIDTH.....	104
8.8.3.	AVERAGE POWER.....	105
8.8.4.	OUTPUT POWER AND PSD	106
8.9.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND</i>	<i>109</i>
8.9.1.	26 dB BANDWIDTH	109
8.9.2.	99% BANDWIDTH.....	111
8.9.3.	AVERAGE POWER.....	113
8.9.4.	OUTPUT POWER AND PSD	114
8.10.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND</i>	<i>118</i>
8.10.1.	26 dB BANDWIDTH.....	118
8.10.2.	99% BANDWIDTH	121
8.10.3.	AVERAGE POWER	124
8.10.4.	OUTPUT POWER AND PSD	125
8.11.	<i>802.11n HT20 CHAIN 1 MODE IN THE 5.3 GHz BAND</i>	<i>129</i>
8.11.1.	26 dB BANDWIDTH.....	129
8.11.2.	99% BANDWIDTH.....	132
8.11.3.	AVERAGE POWER	135
8.11.4.	OUTPUT POWER AND PSD	136
8.12.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND</i>	<i>140</i>
8.12.1.	26 dB BANDWIDTH.....	140
8.12.2.	99% BANDWIDTH	144
8.12.3.	AVERAGE POWER	148
8.12.4.	OUTPUT POWER AND PSD	149
8.13.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.3 GHz BAND</i>	<i>154</i>
8.13.1.	26 dB BANDWIDTH.....	154
8.13.2.	99% BANDWIDTH.....	156
8.13.3.	AVERAGE POWER	158
8.13.4.	OUTPUT POWER AND PSD	159
8.14.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.3 GHz BAND</i>	<i>162</i>

8.14.1.	26 dB BANDWIDTH	162
8.14.2.	99% BANDWIDTH	164
8.14.3.	AVERAGE POWER	166
8.14.4.	OUTPUT POWER AND PSD	167
8.15.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND</i>	<i>170</i>
8.15.1.	26 dB BANDWIDTH	170
8.15.2.	99% BANDWIDTH	173
8.15.3.	AVERAGE POWER	176
8.15.4.	OUTPUT POWER AND PSD	177
8.16.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.3 GHz BAND</i>	<i>181</i>
8.16.1.	26 dB BANDWIDTH	181
8.16.2.	99% BANDWIDTH	182
8.16.3.	AVERAGE POWER	183
8.16.4.	OUTPUT POWER AND PSD	184
8.17.	<i>802.11ac VHT80 CHAIN 1 MODE IN THE 5.3 GHz BAND</i>	<i>187</i>
8.17.1.	26 dB BANDWIDTH	187
8.17.2.	99% BANDWIDTH	188
8.17.3.	AVERAGE POWER	189
8.17.4.	OUTPUT POWER AND PSD	190
8.18.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND</i>	<i>193</i>
8.18.1.	26 dB BANDWIDTH	193
8.18.2.	99% BANDWIDTH	195
8.18.3.	AVERAGE POWER	197
8.18.4.	OUTPUT POWER AND PSD	198
8.19.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	<i>201</i>
8.19.1.	26 dB BANDWIDTH	201
8.19.2.	99% BANDWIDTH	204
8.19.3.	AVERAGE POWER	207
8.19.4.	OUTPUT POWER AND PSD	208
8.20.	<i>802.11ac VHT20 CHAIN 0 STRADDLE CHANNEL 144 RESULTS</i>	<i>212</i>
8.20.1.	OUTPUT POWER AND PSD	212
8.20.2.	6 dB BANDWIDTH	216
8.21.	<i>802.11n HT20 CHAIN 1 MODE IN THE 5.6 GHz BAND</i>	<i>217</i>
8.21.1.	26 dB BANDWIDTH	217
8.21.2.	99% BANDWIDTH	220
8.21.3.	AVERAGE POWER	223
8.21.4.	OUTPUT POWER AND PSD	224
8.22.	<i>802.11ac VHT20 CHAIN 1 STRADDLE CHANNEL 144 RESULTS</i>	<i>228</i>
8.22.1.	OUTPUT POWER AND PSD	228
8.22.2.	6 dB BANDWIDTH	232
8.23.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND</i>	<i>233</i>
8.23.1.	26 dB BANDWIDTH	233
8.23.2.	99% BANDWIDTH	238
8.23.3.	AVERAGE POWER	243
8.23.4.	OUTPUT POWER AND PSD	244
8.24.	<i>802.11ac VHT20 2Tx CDD STRADDLE CHANNEL 144 RESULTS</i>	<i>250</i>
8.24.1.	OUTPUT POWER AND PSD	250
8.24.2.	6 dB BANDWIDTH	256

8.25.	802.11n HT40 CHAIN 0 MODE IN THE 5.6 GHz BAND	258
8.25.1.	26 dB BANDWIDTH	258
8.25.2.	99% BANDWIDTH	262
8.25.3.	AVERAGE POWER	266
8.25.4.	OUTPUT POWER AND PSD	267
8.26.	802.11ac VHT40 CHAIN 0 STRADDLE CH 142 RESULTS	271
8.26.1.	OUTPUT POWER AND PSD	271
8.26.2.	6 dB BANDWIDTH	275
8.27.	802.11n HT40 CHAIN 1 MODE IN THE 5.6 GHz BAND	276
8.27.1.	26 dB BANDWIDTH	276
8.27.2.	99% BANDWIDTH	280
8.27.3.	AVERAGE POWER	284
8.27.4.	OUTPUT POWER AND PSD	285
8.28.	802.11ac VHT40 CHAIN 1 STRADDLE CH 142 RESULTS	289
8.28.1.	OUTPUT POWER AND PSD	289
8.28.2.	6 dB BANDWIDTH	293
8.29.	802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND	294
8.29.1.	26 dB BANDWIDTH	294
8.29.2.	99% BANDWIDTH	301
8.29.3.	AVERAGE POWER	308
8.29.4.	OUTPUT POWER AND PSD	309
8.30.	802.11ac VHT40 2Tx CDD STRADDLE CHANNEL 142 RESULTS	316
8.30.1.	OUTPUT POWER AND PSD	316
8.30.2.	6 dB BANDWIDTH	322
8.31.	802.11ac VHT80 CHAIN 0 MODE IN THE 5.6 GHz BAND	324
8.31.1.	26 dB BANDWIDTH	324
8.31.2.	99% BANDWIDTH	327
8.31.3.	AVERAGE POWER	330
8.31.4.	OUTPUT POWER AND PSD	331
8.31.5.	STRADDLE CHANNEL 138 RESULTS	334
8.31.6.	6 dB BANDWIDTH	338
8.32.	802.11ac VHT80 CHAIN 1 MODE IN THE 5.6 GHz BAND	339
8.32.1.	26 dB BANDWIDTH	339
8.32.2.	99% BANDWIDTH	342
8.32.3.	AVERAGE POWER	345
8.32.4.	OUTPUT POWER AND PSD	346
8.32.5.	STRADDLE CHANNEL 138 RESULTS	349
8.32.6.	6 dB BANDWIDTH	353
8.33.	802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND	354
8.33.1.	26 dB BANDWIDTH	354
8.33.2.	99% BANDWIDTH	358
8.33.3.	AVERAGE POWER	362
8.33.4.	OUTPUT POWER AND PSD	363
8.33.5.	STRADDLE CHANNEL 138 RESULTS	368
8.33.6.	6 dB BANDWIDTH	374
8.34.	802.11n HT20 CHAIN 0 MODE IN THE 5.8 GHz BAND	376
8.34.1.	6 dB BANDWIDTH	376
8.34.2.	26 dB BANDWIDTH	379
8.34.3.	99% BANDWIDTH	382

8.34.4.	AVERAGE POWER	385
8.34.5.	OUTPUT POWER.....	386
8.34.6.	PSD	388
8.35.	<i>802.11n HT20 CHAIN 1 MODE IN THE 5.8 GHz BAND</i>	<i>391</i>
8.35.1.	6 dB BANDWIDTH.....	391
8.35.2.	26 dB BANDWIDTH.....	394
8.35.3.	99% BANDWIDTH.....	397
8.35.4.	AVERAGE POWER	400
8.35.5.	OUTPUT POWER.....	401
8.35.6.	PSD	403
8.36.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND</i>	<i>406</i>
8.36.1.	6 dB BANDWIDTH.....	406
8.36.2.	26 dB BANDWIDTH.....	410
8.36.3.	99% BANDWIDTH.....	414
8.36.4.	AVERAGE POWER	418
8.36.5.	OUTPUT POWER.....	419
8.36.6.	PSD	421
8.37.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.8 GHz BAND</i>	<i>426</i>
8.37.1.	6 dB BANDWIDTH.....	426
8.37.2.	26 dB BANDWIDTH.....	428
8.37.3.	99% BANDWIDTH.....	430
8.37.4.	AVERAGE POWER	432
8.37.5.	OUTPUT POWER.....	433
8.37.6.	PSD	435
8.38.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.8 GHz BAND</i>	<i>438</i>
8.38.1.	6 dB BANDWIDTH.....	438
8.38.2.	26 dB BANDWIDTH.....	440
8.38.3.	99% BANDWIDTH.....	442
8.38.4.	AVERAGE POWER	444
8.38.5.	OUTPUT POWER.....	445
8.38.6.	PSD	447
8.39.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND</i>	<i>450</i>
8.39.1.	6 dB BANDWIDTH.....	450
8.39.2.	26 dB BANDWIDTH.....	453
8.39.3.	99% BANDWIDTH.....	456
8.39.4.	AVERAGE POWER	459
8.39.5.	OUTPUT POWER.....	460
8.39.6.	PSD	462
8.40.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.8 GHz BAND</i>	<i>466</i>
8.40.1.	6 dB BANDWIDTH.....	466
8.40.2.	26 dB BANDWIDTH.....	467
8.40.3.	99% BANDWIDTH.....	468
8.40.4.	AVERAGE POWER	469
8.40.5.	OUTPUT POWER.....	470
8.40.6.	PSD	472
8.41.	<i>802.11ac VHT80 CHAIN 1 MODE IN THE 5.8 GHz BAND</i>	<i>474</i>
8.41.1.	6 dB BANDWIDTH.....	474
8.41.2.	26 dB BANDWIDTH.....	475
8.41.3.	99% BANDWIDTH.....	476
8.41.4.	AVERAGE POWER	477

8.41.5.	OUTPUT POWER.....	478
8.41.6.	PSD	480
8.42.	802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND.....	482
8.42.1.	6 dB BANDWIDTH.....	482
8.42.2.	26 dB BANDWIDTH.....	484
8.42.3.	99% BANDWIDTH.....	486
8.42.4.	AVERAGE POWER.....	488
8.42.5.	OUTPUT POWER.....	489
8.42.6.	PSD	491
9.	RADIATED TEST RESULTS	494
9.1.	LIMITS AND PROCEDURE.....	494
9.2.	802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND.....	495
9.3.	802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND	515
9.4.	802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND.....	523
9.5.	802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND	535
9.6.	802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND.....	541
9.7.	802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND	549
9.8.	802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND.....	553
9.9.	802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND	573
9.10.	802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND	581
9.11.	802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND.....	593
9.12.	802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND	599
9.13.	802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND.....	607
9.14.	802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND	611
9.15.	802.11ac VHT20 1Tx STRADDLE CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS.....	631
9.16.	802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND.....	635
9.17.	802.11ac VHT20 2Tx CDD STRADDLE CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS.....	645
9.18.	802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND	647
9.19.	802.11ac VHT40 1Tx STRADDLE CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS.....	671
9.20.	802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND.....	675
9.21.	802.11ac VHT40 2Tx CDD STRADDLE CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS.....	687
9.22.	802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND	689
9.23.	802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND.....	705
9.24.	802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND	713
9.25.	802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND.....	733

9.26.	802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND	743
9.27.	802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND	759
9.28.	802.11ac VHT80 1Tx MODE IN THE 5.8 GHz BAND	767
9.29.	802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND	779
9.30.	WORST-CASE BELOW 1 GHz	785
9.31.	WORST-CASE ABOVE 18 GHz	787
10.	AC POWER LINE CONDUCTED EMISSIONS	791
10.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE	792
10.2.	EUT POWERED BY HOST PC VIA USB CABLE	794
11.	DYNAMIC FREQUENCY SELECTION	796
11.1.	OVERVIEW	796
11.1.1.	LIMITS	796
11.1.2.	TEST AND MEASUREMENT SYSTEM	800
11.1.3.	TEST AND MEASUREMENT SOFTWARE	802
11.1.4.	SETUP OF EUT (CLIENT MODE)	803
11.1.5.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)	804
11.1.6.	DESCRIPTION OF EUT	805
11.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH	807
11.2.1.	TEST CHANNEL	807
11.2.2.	RADAR WAVEFORM AND TRAFFIC	807
11.2.3.	OVERLAPPING CHANNEL TESTS	810
11.2.4.	MOVE AND CLOSING TIME	810
11.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH	814
11.3.1.	TEST CHANNEL	814
11.3.2.	RADAR WAVEFORM AND TRAFFIC	814
11.3.3.	OVERLAPPING CHANNEL TESTS	817
11.3.4.	MOVE AND CLOSING TIME	817
11.4.	CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH	821
11.4.1.	TEST CHANNEL	821
11.4.2.	RADAR WAVEFORM AND TRAFFIC	821
11.4.3.	OVERLAPPING CHANNEL TESTS	824
11.4.4.	MOVE AND CLOSING TIME	824
11.4.5.	10-MINUTE CLIENT Tx MONITORING PERIOD	828
11.5.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 829	
11.5.1.	TEST CHANNEL	829
11.5.2.	RADAR WAVEFORM AND TRAFFIC	829
11.5.3.	OVERLAPPING CHANNEL TESTS	832
11.5.4.	MOVE AND CLOSING TIME	832
11.6.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 836	
11.6.1.	TEST CHANNEL	836
11.6.2.	RADAR WAVEFORM AND TRAFFIC	836
11.6.3.	OVERLAPPING CHANNEL TESTS	839
11.6.4.	MOVE AND CLOSING TIME	839

11.7.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH	
	843	
11.7.1.	TEST CHANNEL.....	843
11.7.2.	RADAR WAVEFORM AND TRAFFIC	843
11.7.3.	OVERLAPPING CHANNEL TESTS	846
11.7.4.	MOVE AND CLOSING TIME	846
11.7.5.	10-MINUTE CLIENT Tx MONITORING PERIOD	850
12.	SETUP PHOTOS.....	851

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1661, A1786

SERIAL NUMBER: C39RV05THFNN (CONDUCTED), C39RV04CHFNN (RADIATED)

DATE TESTED: MARCH 11, 2016 – AUGUST 03, 2016


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



MENGISTU MEKURA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

ERIC YU
EMC LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

FCC: The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r01/D06 v02/ D07 v01r01, FCC KDB 789033 D02 v01r02, FCC KDB 644545 D03 v01, ANSI C63.10-2013,.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F
	☐ Chamber G
	☒ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT, Model A1661, A1786 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA/EVDO/LTE-radio, IEEE 802.11a/b/g/n/ac, NFC and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

NOTE: Covered modes are test reduction modes. The output powers on the “covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	20.50	112.20
	802.11n HT20 2TX CDD	20.96	124.74
	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
5190 - 5230	802.11n HT40 SISO	18.47	70.31
	802.11n HT40 2TX CDD	20.44	110.66
	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	14.92	31.05
	802.11ac VHT80 2TX CDD	15.87	38.64
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11ac VHT80 CDD 2TX	

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	20.05	101.16
	802.11n HT20 2TX CDD	20.88	122.46
	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
5270 - 5310	802.11n HT40 SISO	18.48	70.47
	802.11n HT40 2TX CDD	21.39	137.72
	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	14.36	27.26
	802.11ac VHT80 2TX CDD	16.87	48.64
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11ac VHT80 CDD 2TX	

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	20.50	112.20
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	18.85	76.74
5500 - 5700	802.11n HT20 2TX CDD	20.49	111.94
5720	802.11ac VHT20 2TX CDD (based on UNII-2C band output power)	20.09	102.09
5500 - 5700	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 CDD 2TX	
5720	802.11ac VHT20 2TX STBC/SDM (based on UNII-2C band output power)	Covered by 802.11n HT20 CDD 2TX	
5510 - 5670	802.11n HT40 SISO	19.50	89.13
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	18.67	73.62
5510 - 5670	802.11n HT40 2TX CDD	21.42	138.68
5710	802.11ac VHT40 2TX CDD (based on UNII-2C band output power)	20.81	120.50
5510 - 5670	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 CDD 2TX	
5710	802.11ac VHT40 2TX STBC/SDM (based on UNII-2C band output power)	Covered by 802.11n HT40 CDD 2TX	
5530-5610	802.11ac VHT80 SISO	18.89	77.45
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	18.73	74.64
5530-5610	802.11ac VHT80 CDD 2TX	21.11	129.12
5690	802.11ac VHT80 CDD 2TX (based on UNII-2C band output power)	21.02	126.47
5530-5610	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11ac VHT80 CDD 2TX	
5690	802.11ac VHT80 2TX STBC/SDM (based on UNII-2C band output power)	Covered by 802.11ac VHT80 CDD 2TX	

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
5745 - 5825	802.11n HT20 SISO	20.50	112.20
5745 - 5825	802.11a 2TX CDD	Covered by 802.11n HT20 CDD 2TX	
5745 - 5825	802.11n HT20 CDD 2TX	21.76	149.97
5745 - 5825	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 CDD 2TX	
5755 - 5795	802.11n HT40 SISO	18.88	77.27
5755 - 5795	802.11n HT40 CDD 2TX	20.65	116.14
5755 - 5795	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 CDD 2TX	
5775	802.11ac VHT80 SISO	18.72	74.40
5775	802.11ac VHT80 CDD 2TX	19.72	93.76
5775	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Chain 0	Chain 1
5.2	-5.15	-1.48
5.3	-3.75	-1.38
5.5	0.17	-0.80
5.8	0.22	-1.52

5.4. SOFTWARE AND FIRMWARE

The firmware version installed in the EUT during testing was 9.44.11.27
The test utility software used during testing was wl 1.359RC65.0.

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The output power for PSD and spurious tests was set higher than maximum for the purposes of testing only.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either Chain 0 or Chain 1. Both antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For MIMO modes, both Chain 0 and Chain 1 used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Chain 0	Y-Landscape
		Chain 1	Z-Portrait
	2TX MIMO	Chain 0 + Chain 1	Y-Landscape

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the 2.4GHz and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

The following configurations were investigated on AC line conducted test.

Configuration	Descriptions
1	EUT powered by AC/DC adapter via USB cable
2	EUT powered by host PC via USB cable

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	MacBook Pro	73043BDQAGU	N/A
Laptop AC/DC adapter	Apple	A1172	MV7211FJAX4XA	N/A
EUT AC/DC adapter	Apple	A1357	W010A051	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A


I/O CABLES (AC LINE CONDUCTED: AC/DC ADAPTER & Laptop Configuration)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Power Adapter	1	AC	Un-shielded	3	N/A
2	AC	1	AC	Un-shielded	3	N/A

TEST SETUP

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

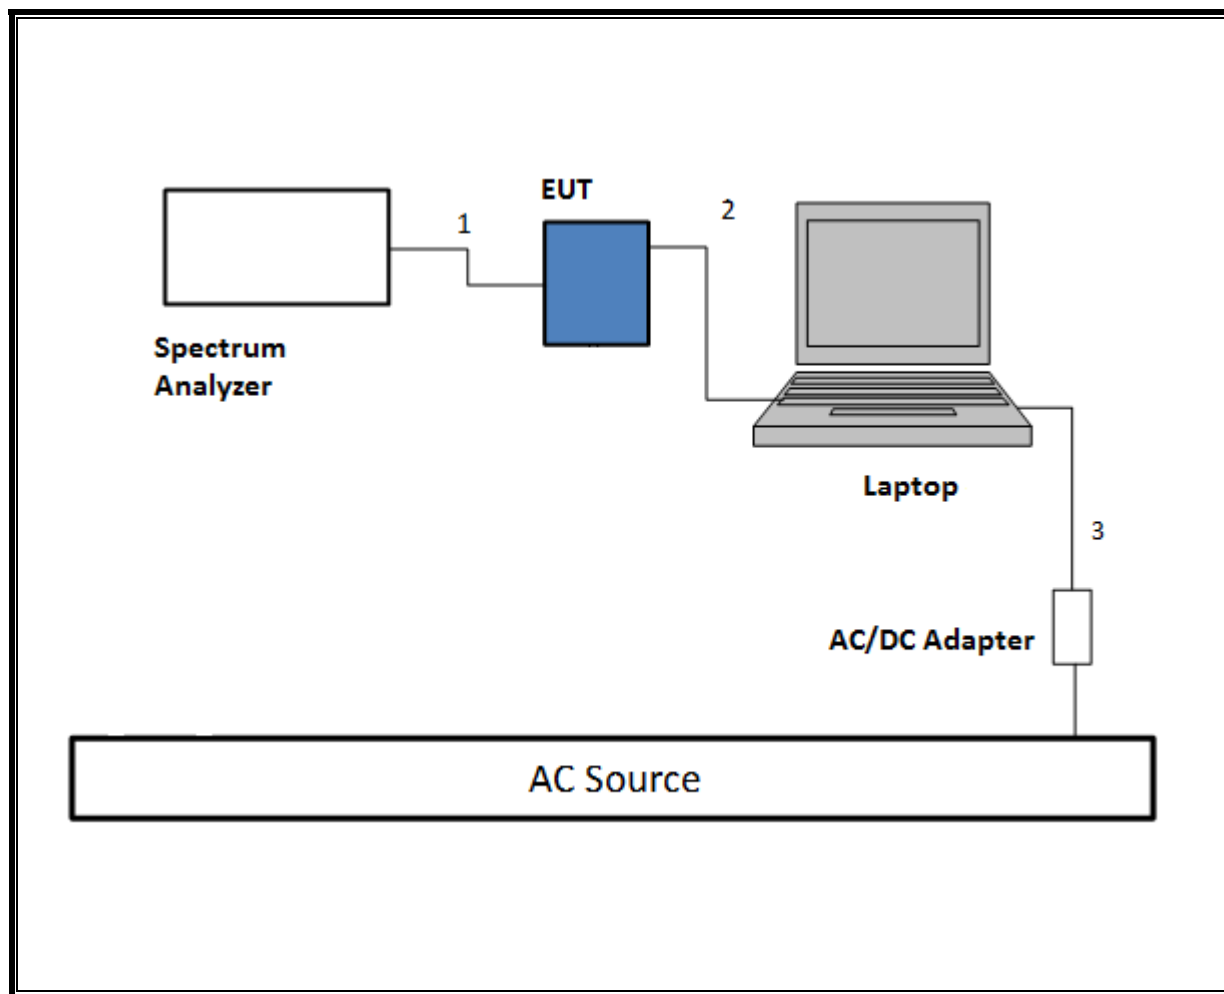

TEST SETUP- RADIATED-ABOVE 1 GHz

The battery powered EUT was tested as a standalone unit. Test software exercised the EUT.


SETUP DIAGRAM

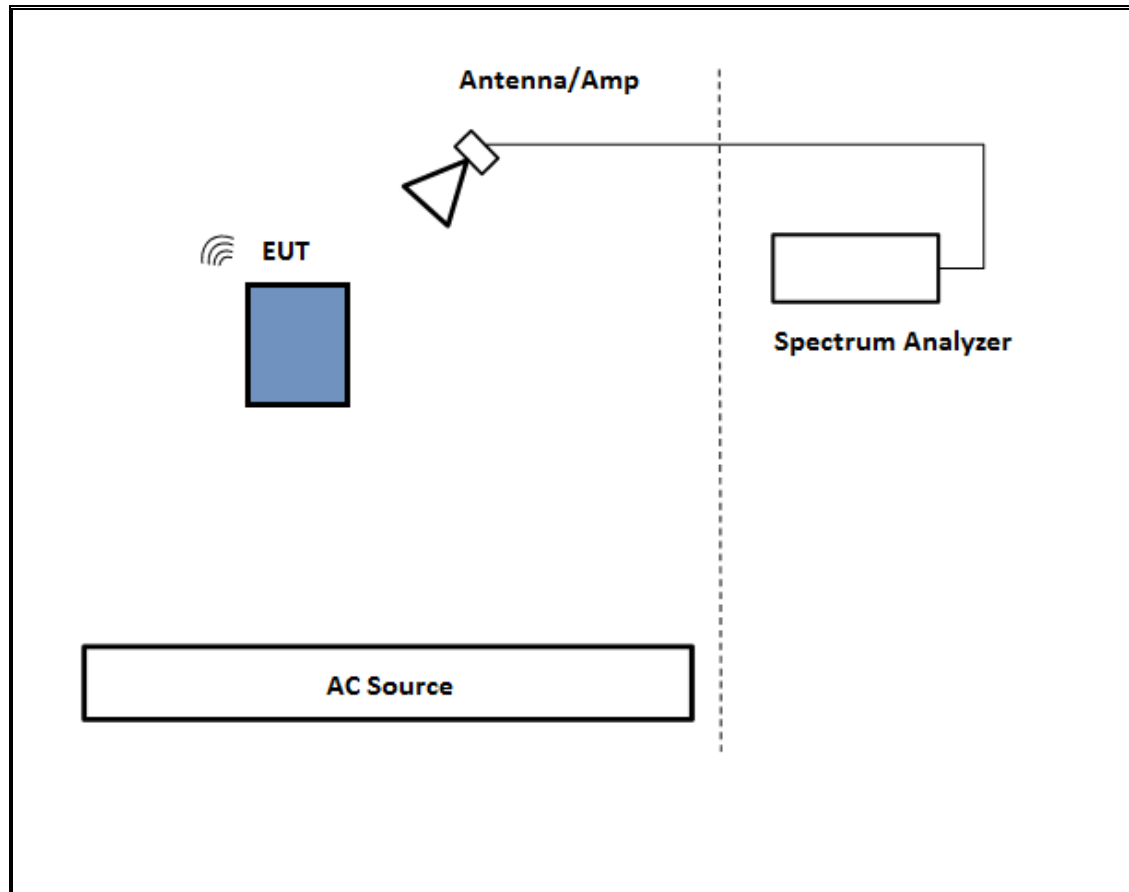

TEST SETUP- BELOW 1GHz

The EUT was tested with powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

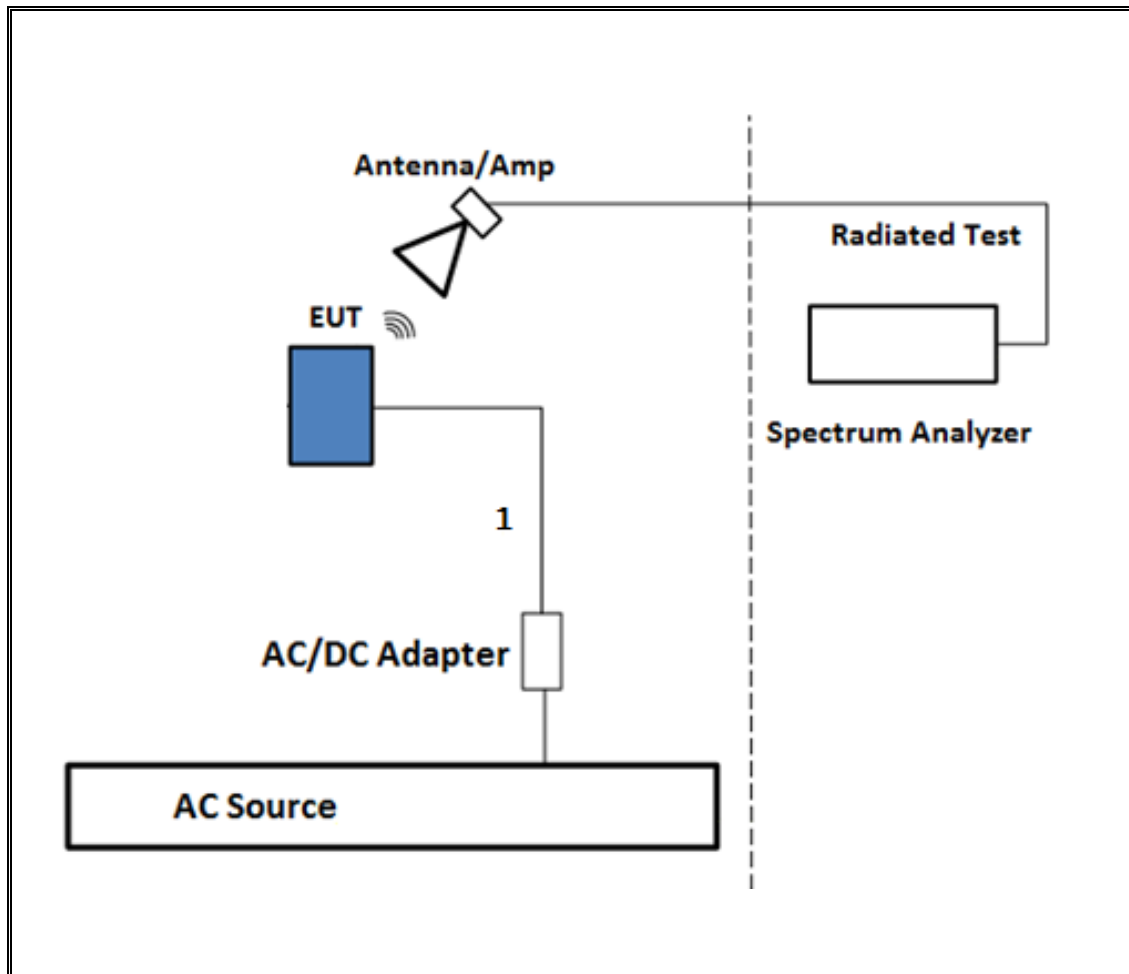

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER

The EUT was tested with powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

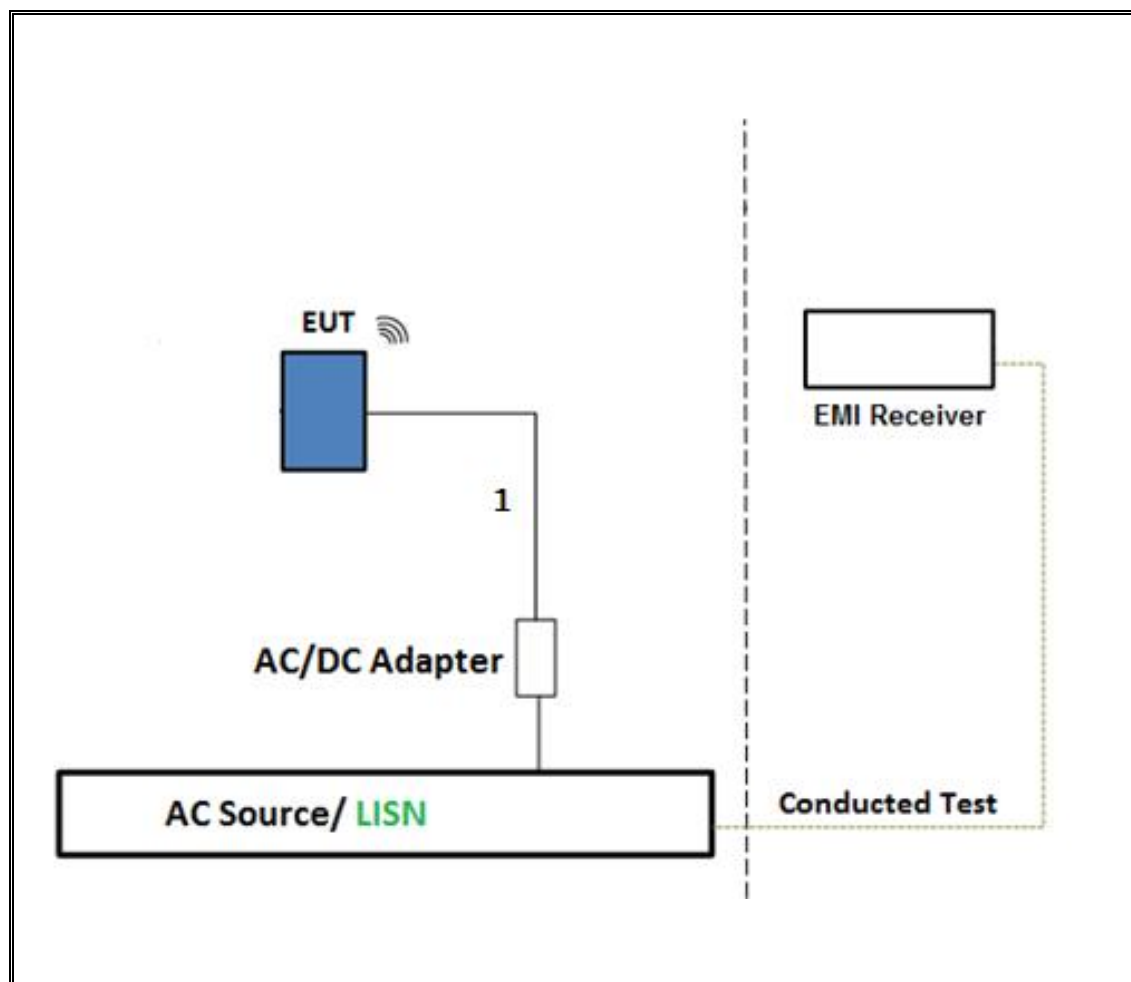

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

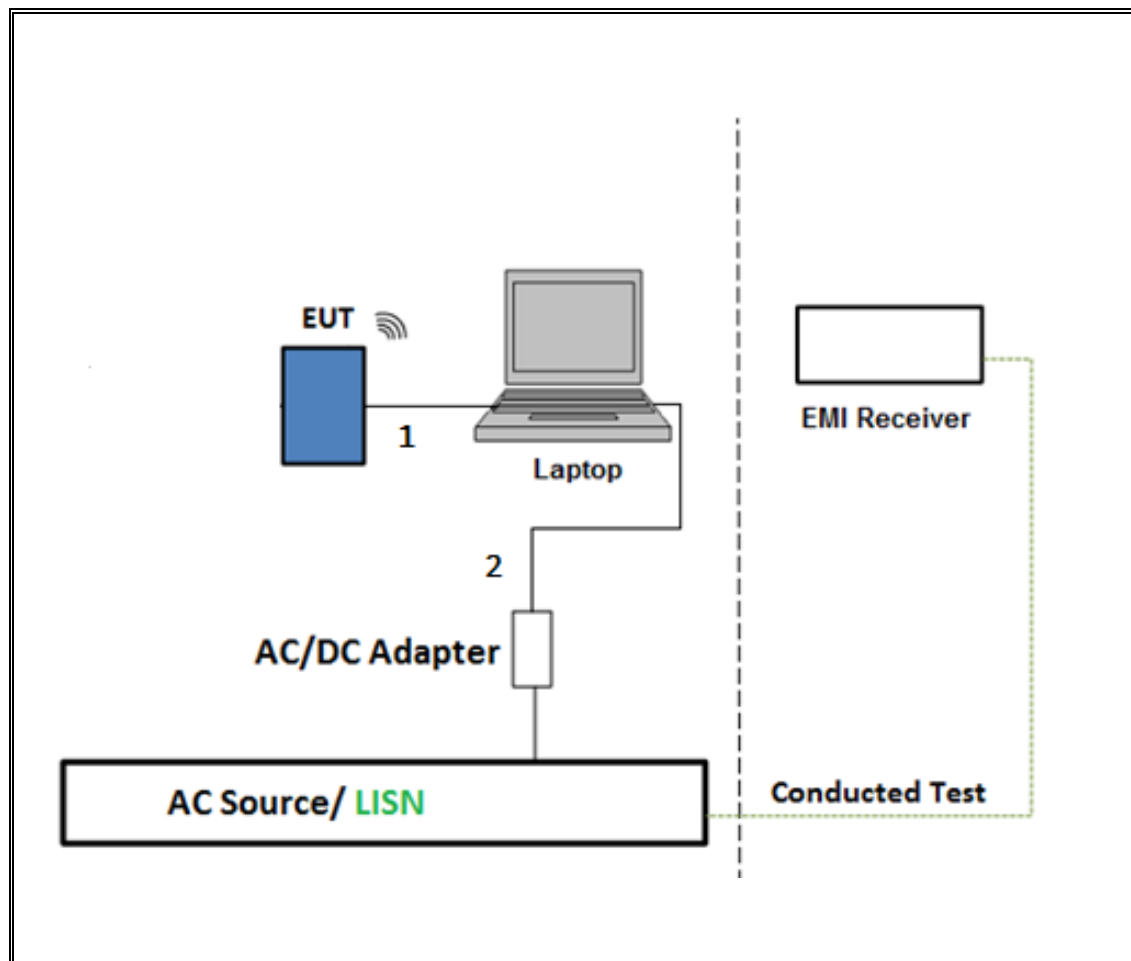

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	00154522	1/12/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	A022813-1	10/28/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1782158	1/25/2017
**Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	323562	5/4/2016
***Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	323562	5/4/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	MY52350675	11/15/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	MY51380911	10/15/2016
Power Meter, P-series single channel	Agilent	N1911A	GB45100212	9/25/2016
**Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	MY53260010	7/8/2016
Power Meter, RF	Anritsu	ML2495A	T1413	12/26/2016
Power Sensor, 50MHz VBW Pulsed Radar & Comm Signals	Anritsu	MA2411B	T1415	12/16/2016
**Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	209336	5/26/2016
Spectrum Analyzer, 40 GHz	Agilent	8564E	3943A01643	8/14/2016
**Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	3008A04710	6/29/2016
**Antenna, Horn 26.5 to 40GHz	ARA	MWH-2640	209340	5/26/2016
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	100935	9/10/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2	161124	9/16/2016
**Power Cable, Line Conducted Emissions	U L	PG1	N/A	7/28/2016
UL SOFTWARE				
* Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015	
* Conducted Software	UL	UL EMC	Ver 4.4, March 30, 2016	
* AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

Note: * indicates automation software version used in the compliance certification testing
 ** Tests were set for test before equipment expired.
 ***Equipment was set to test after calibration service date (equipment calibration cycle is one year).

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.



RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 CDD	1.917	1.941	0.988	98.76%	0.00	0.010
802.11n HT40 1TX	1.124	1.142	0.984	98.42%	0.00	0.010
802.11n HT40 CDD	1.124	1.144	0.983	98.25%	0.00	0.010
802.11ac VHT80 1TX	0.544	0.563	0.966	96.63%	0.15	1.838
802.11ac VHT80 CDD	0.460	0.481	0.956	95.63%	0.19	2.174

DUTY CYCLE PLOTS

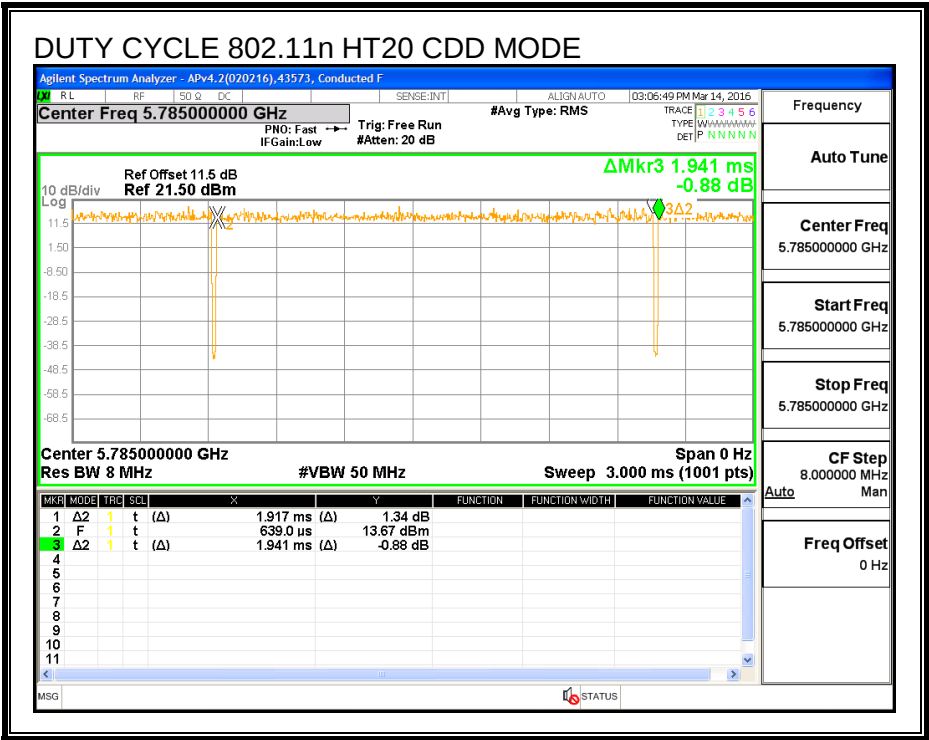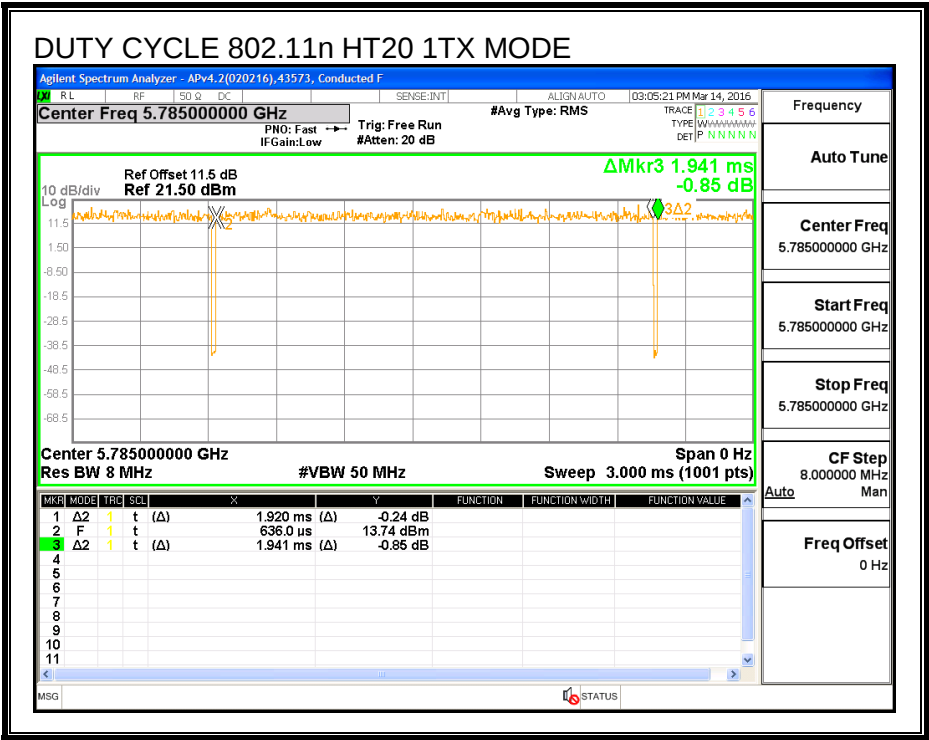

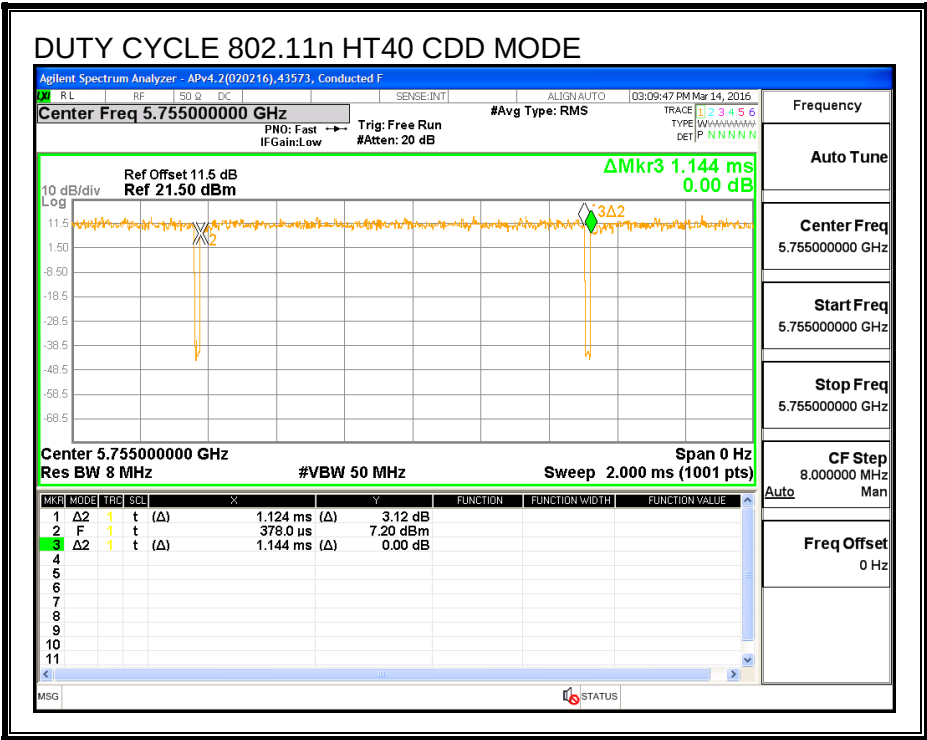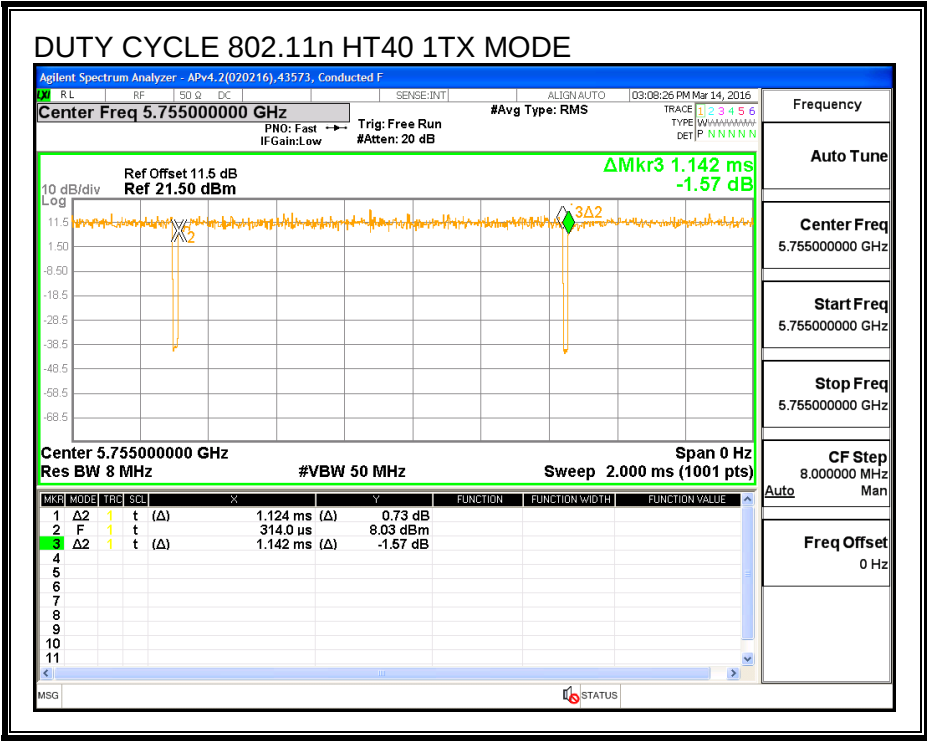

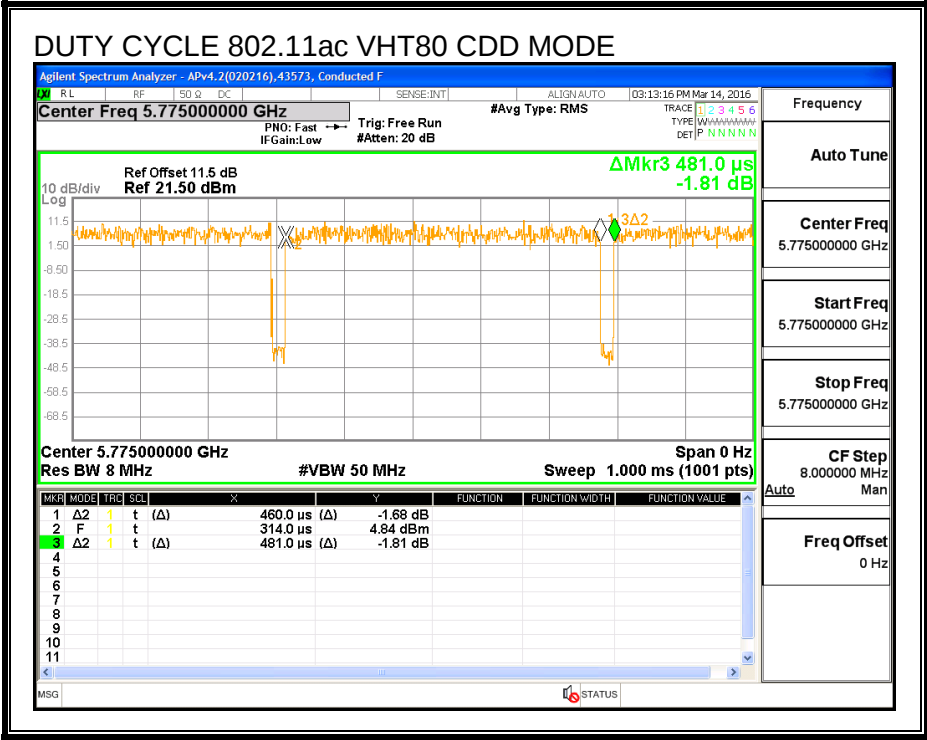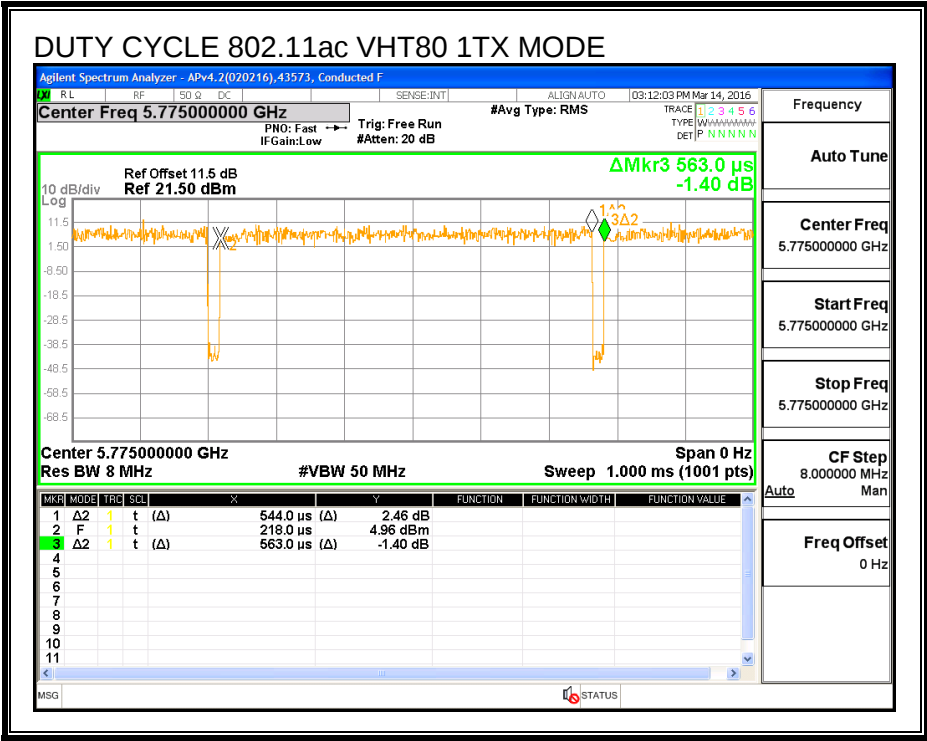

7.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r02, Section C.

26 dB Emission BW: KDB 789033 D02 v01r02, Section C.

99% Occupied BW: KDB 789033 D02 v01r02, Section D.

Conducted Output Power: KDB 789033 D02 v01r02, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r02, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r02, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r02, Sections G.3, G.4, and G.5.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.100
Mid	5200	22.066
Mid	5220	22.508
High	5240	22.100

26 dB BANDWIDTH

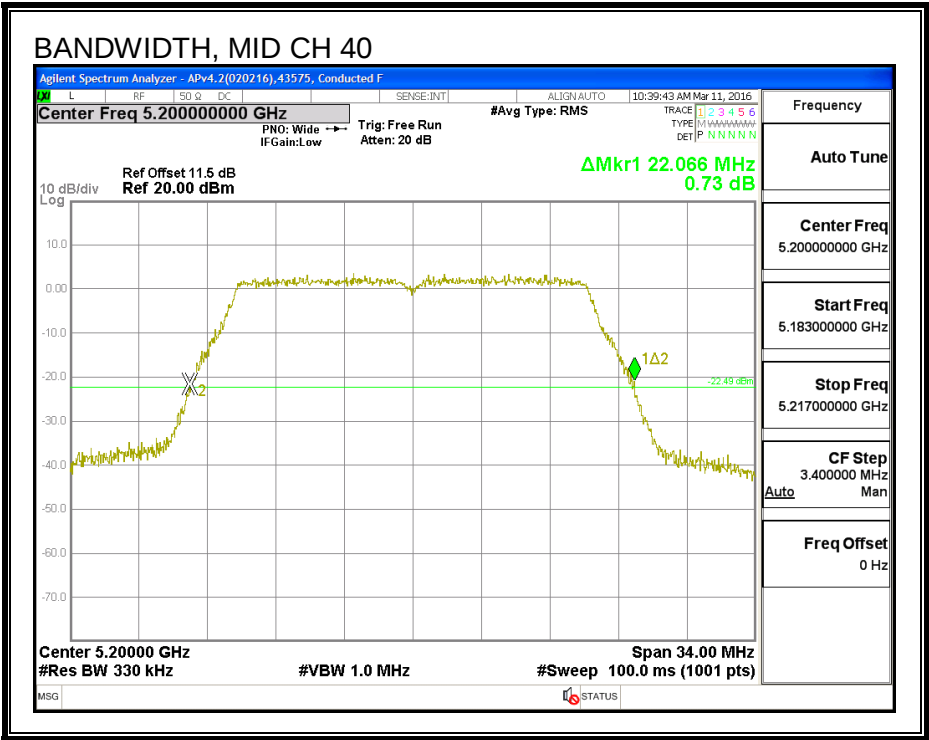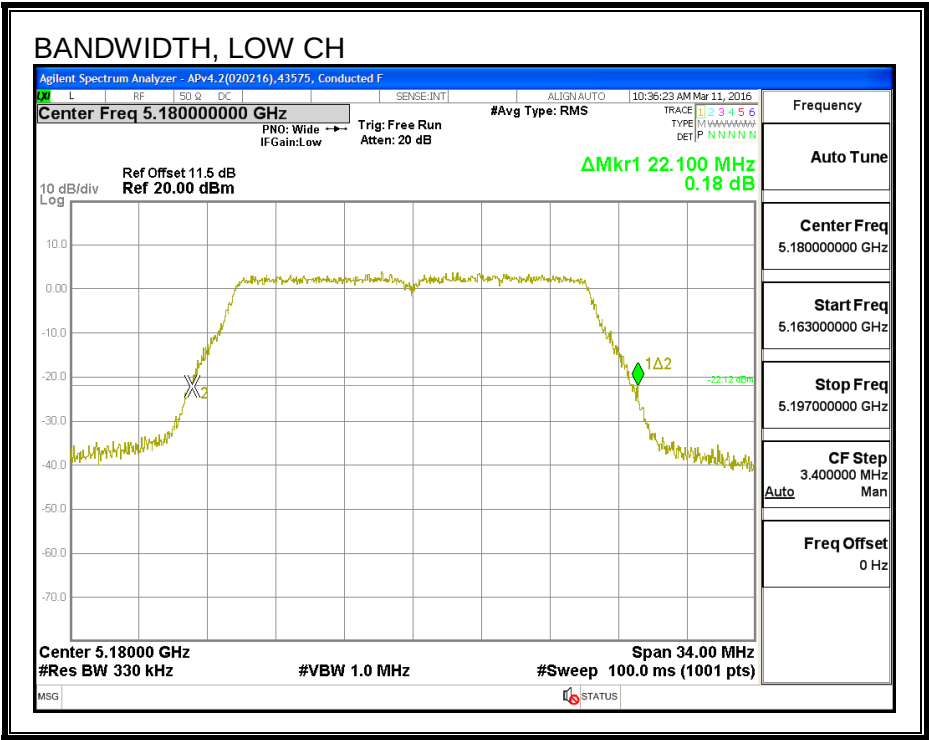

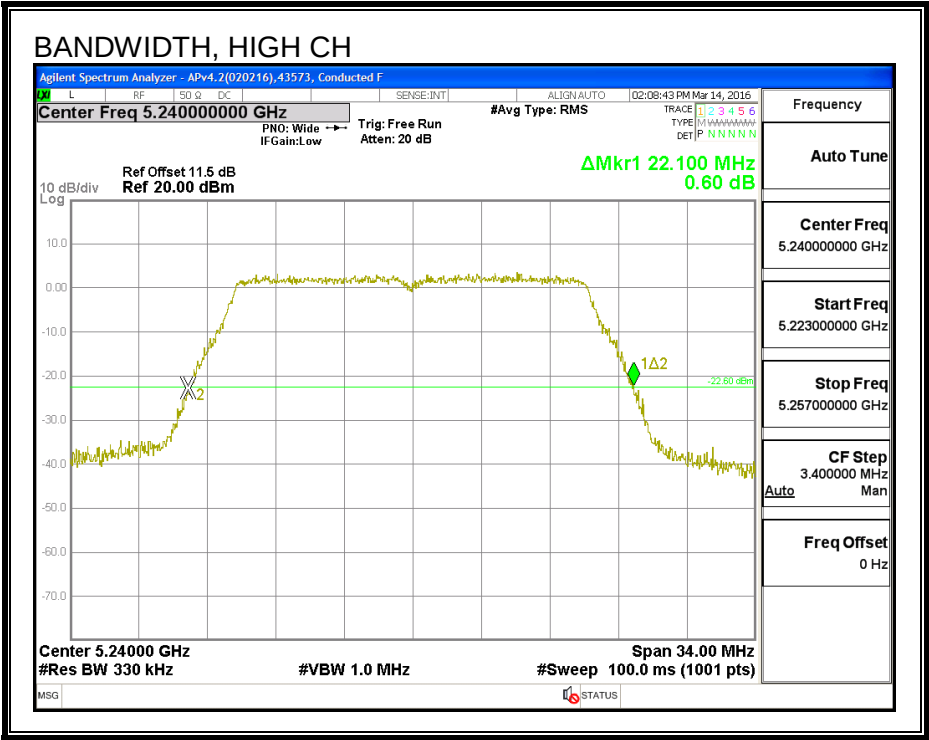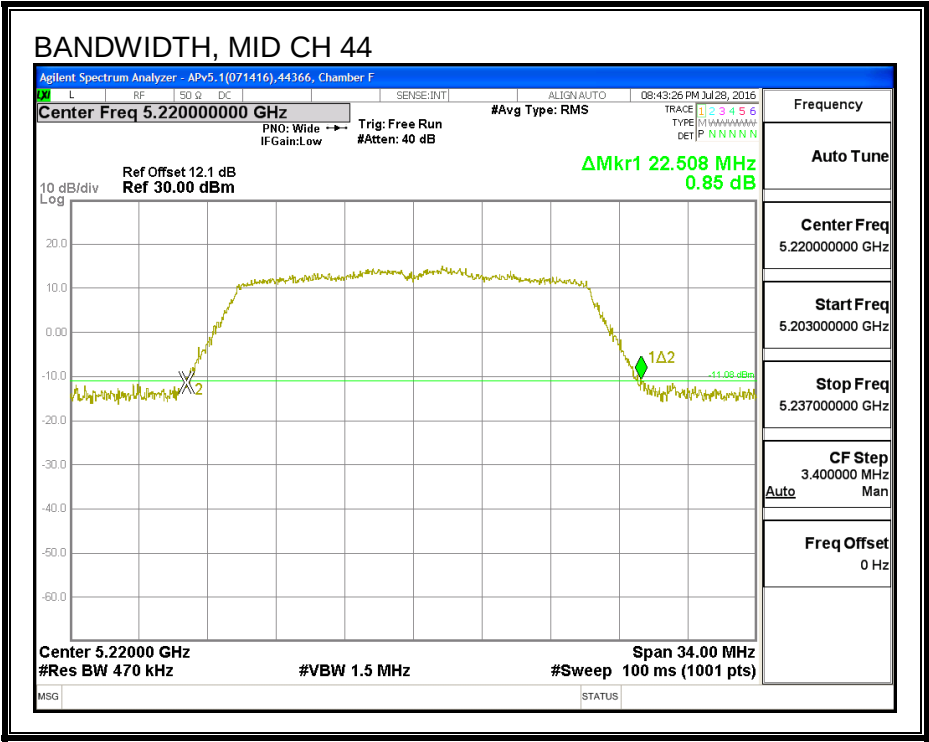

8.1.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.831
Mid	5200	17.792
Mid	5220	17.727
High	5240	17.749

99% BANDWIDTH

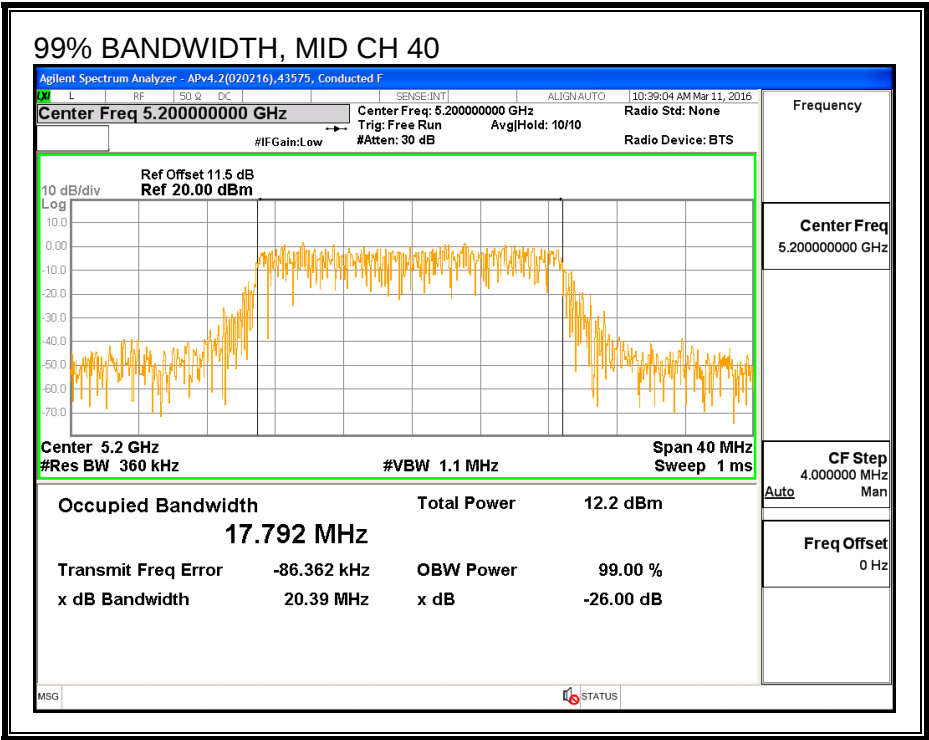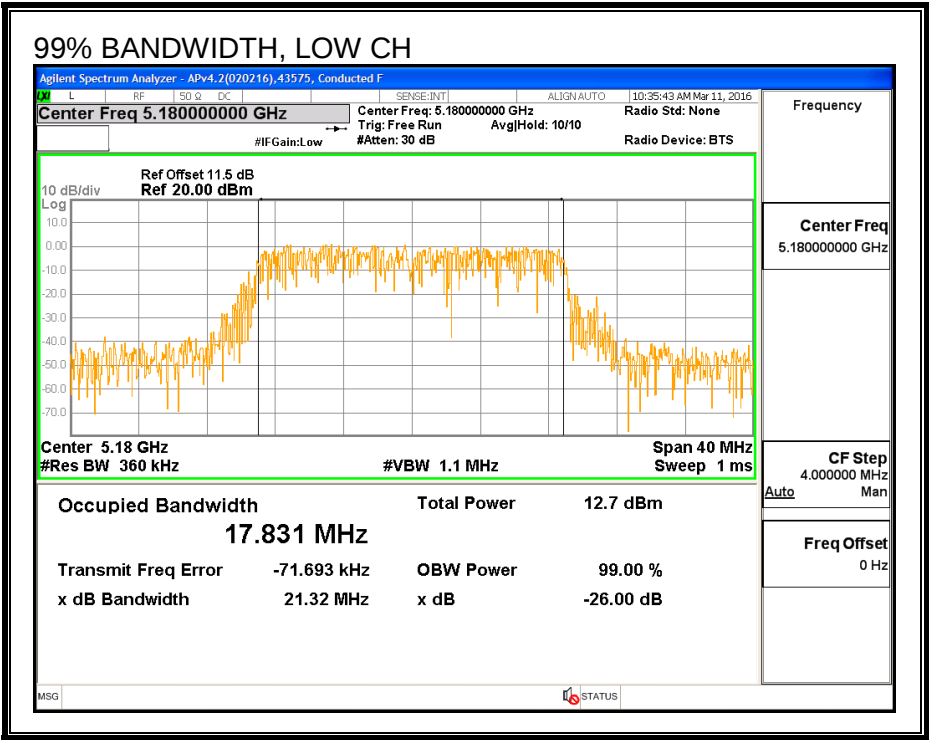

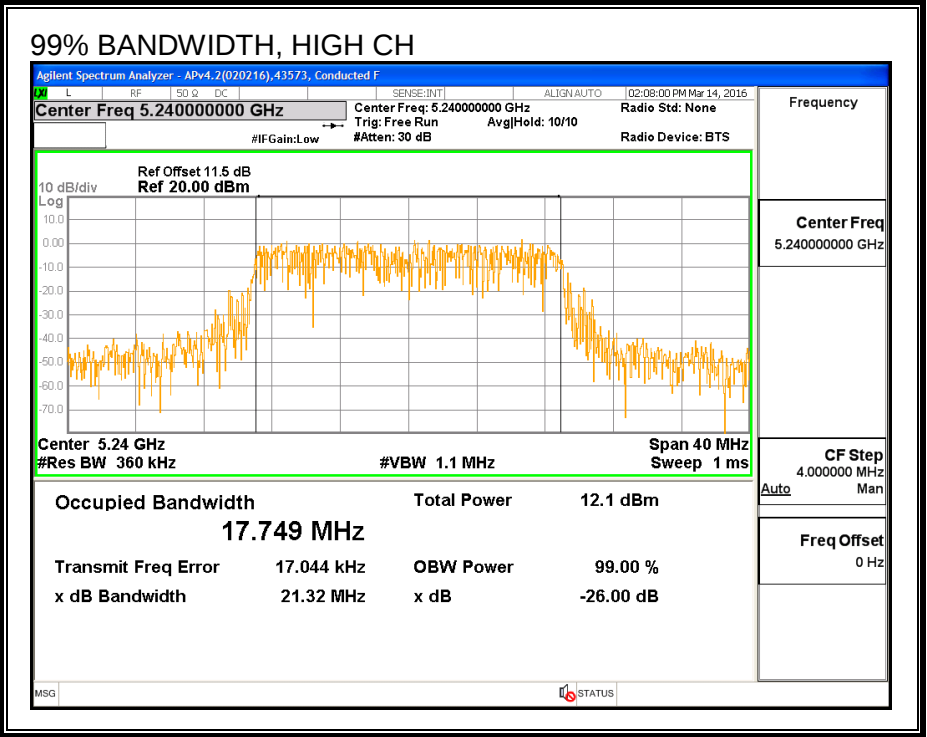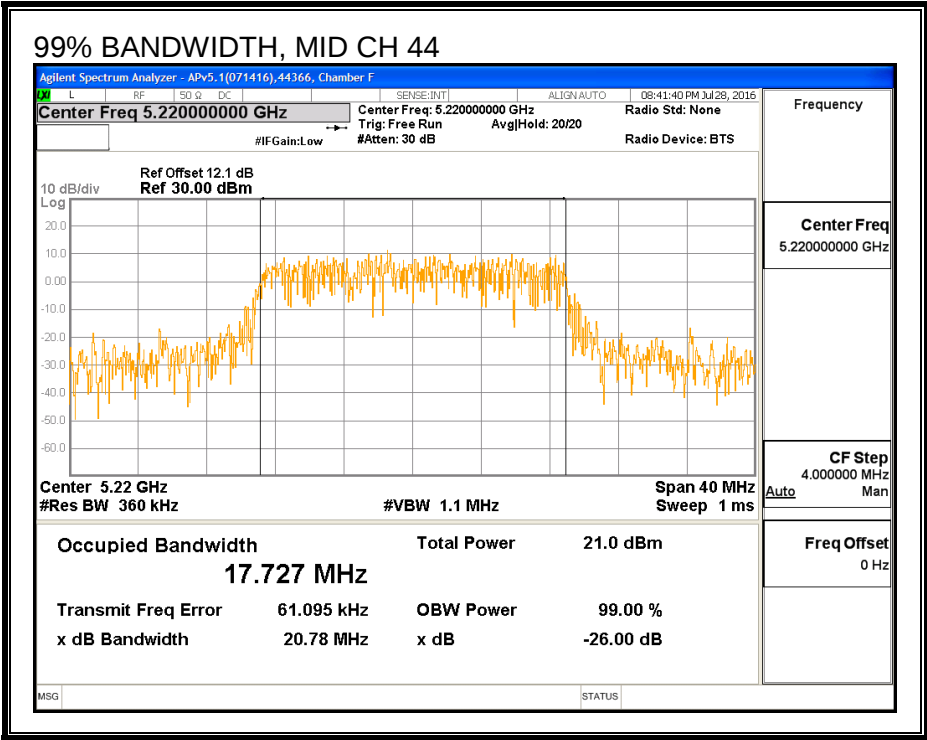

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	44366	Date:	7/28/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	17.45
Mid	5200	19.00
Mid	5220	20.50
High	5240	19.49

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	44366	Date:	7/28/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-5.15	-5.15	24.00	11.00
Mid	5200	-5.15	-5.15	24.00	11.00
Mid	5220	-5.15	-5.15	24.00	11.00
High	5240	-5.15	-5.15	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.45	17.45	24.00	-6.56
Mid	5200	19.00	19.00	24.00	-5.00
Mid	5220	20.50	20.50	24.00	-3.50
High	5240	19.49	19.49	24.00	-4.51

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.52	6.52	11.00	-4.48
Mid	5200	9.97	9.97	11.00	-1.03
Mid	5220	9.99	9.99	11.00	-1.01
High	5240	8.63	8.63	11.00	-2.37

PSD

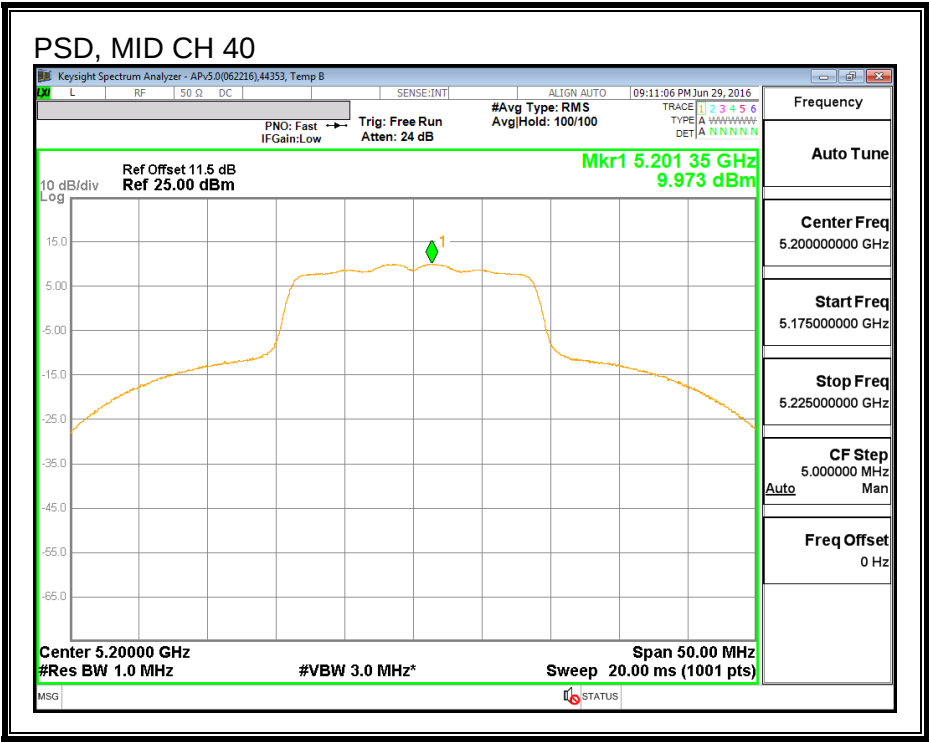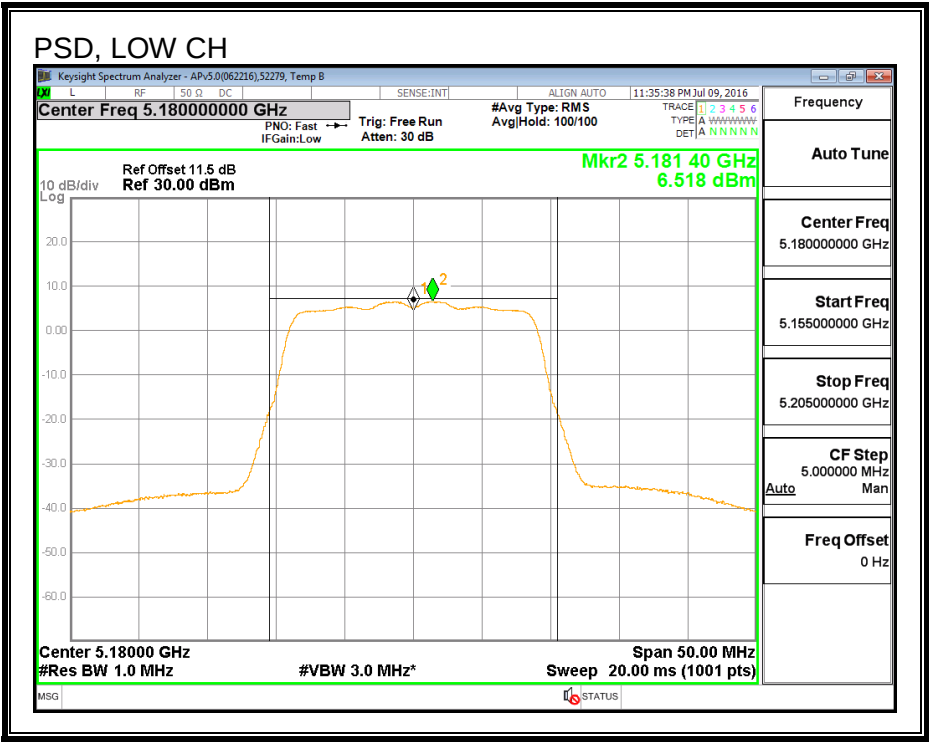

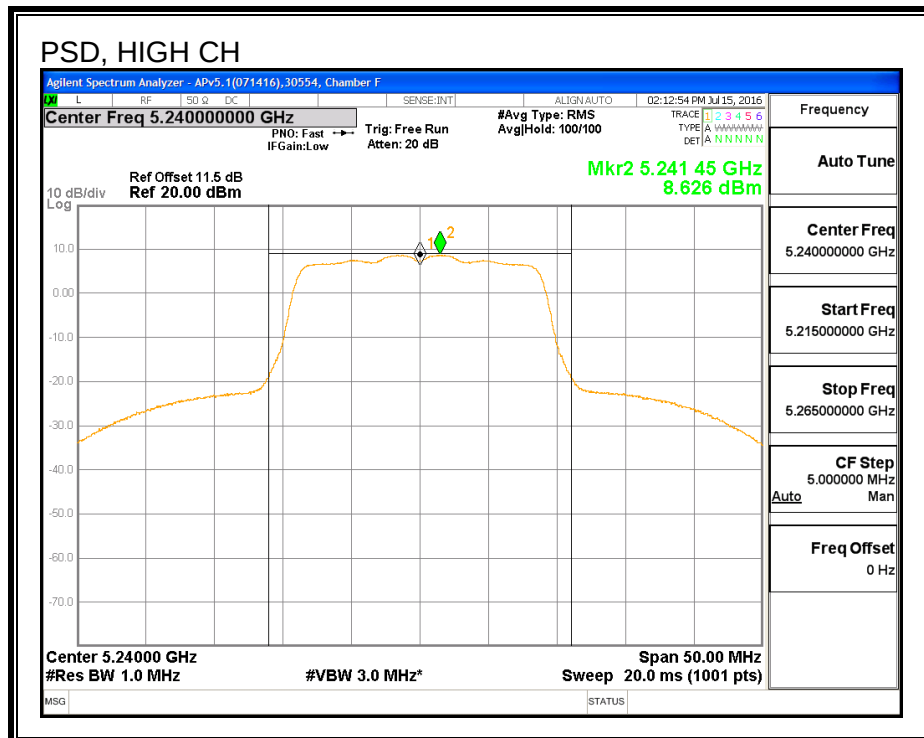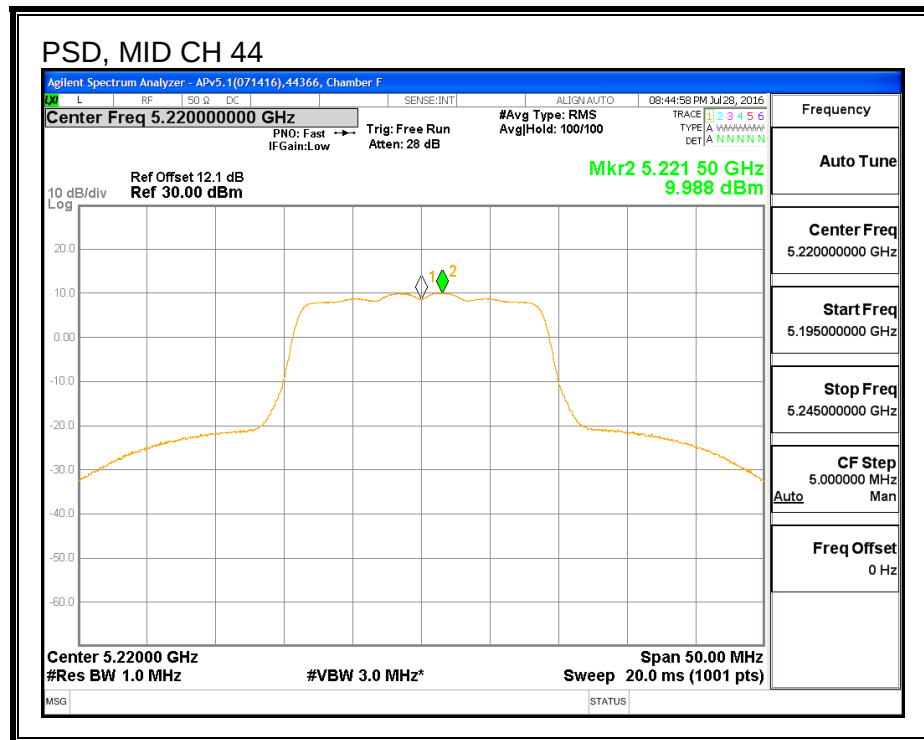

8.2. 802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.846
Mid	5200	21.945
Mid	5220	47.376
High	5240	21.978

26 dB BANDWIDTH

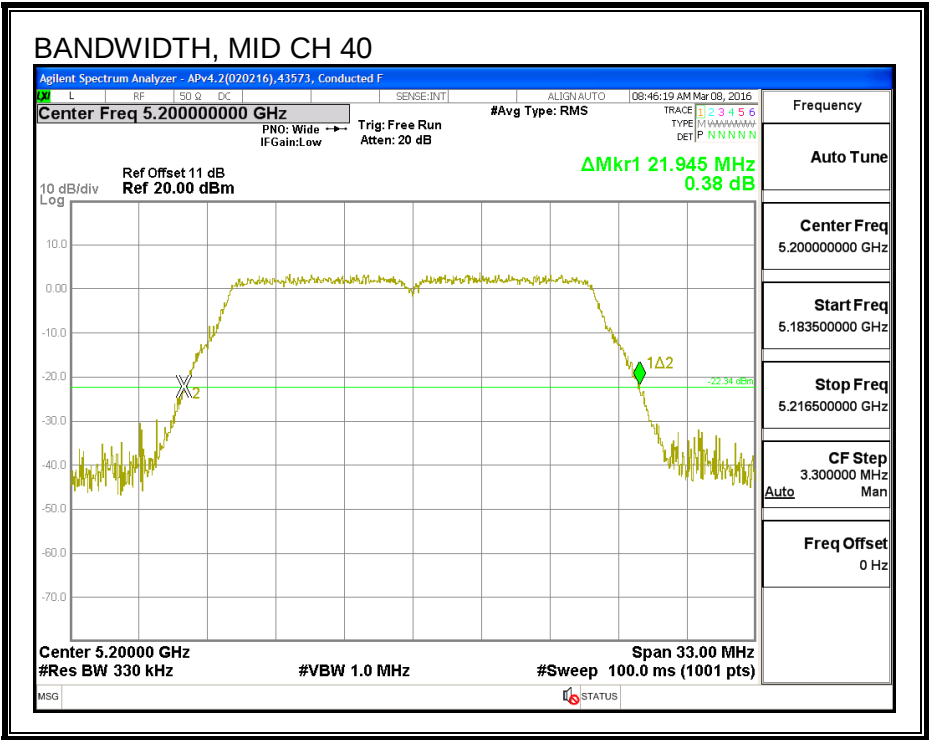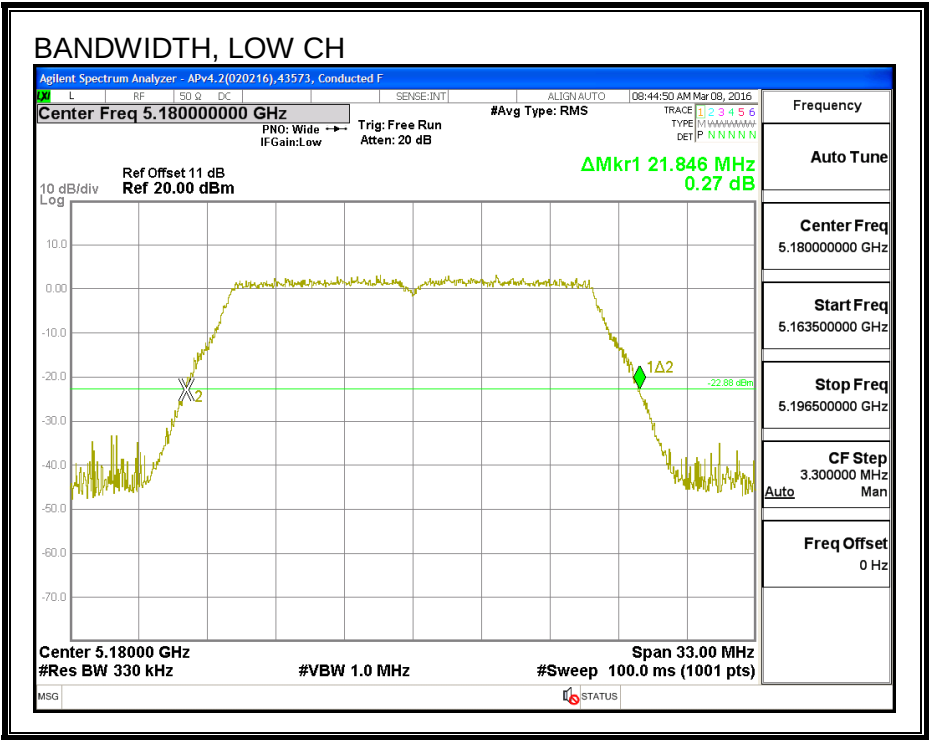

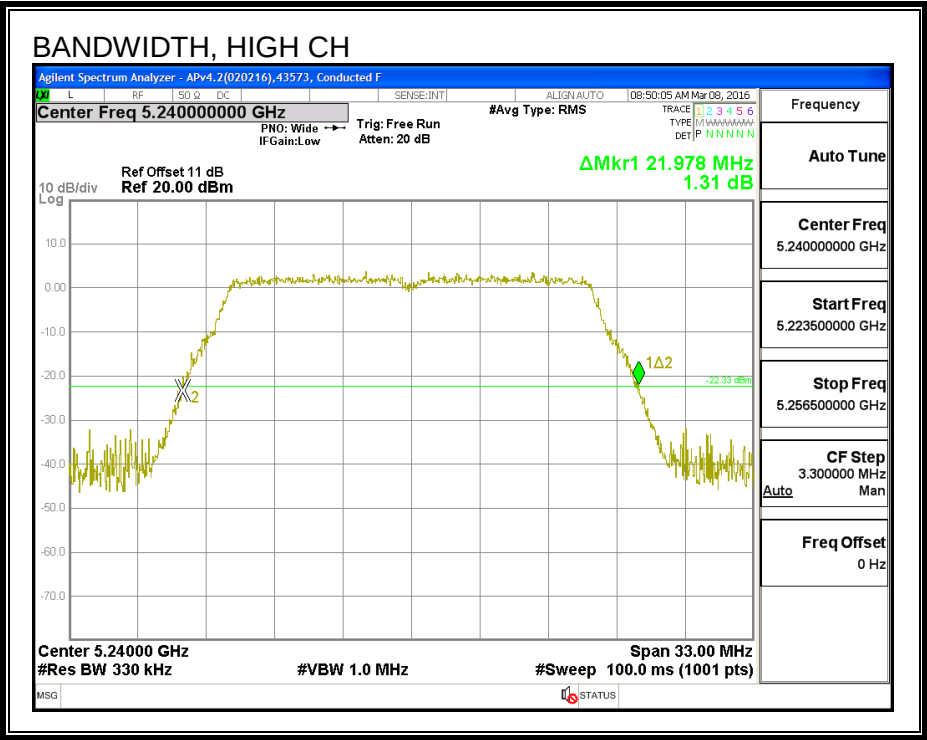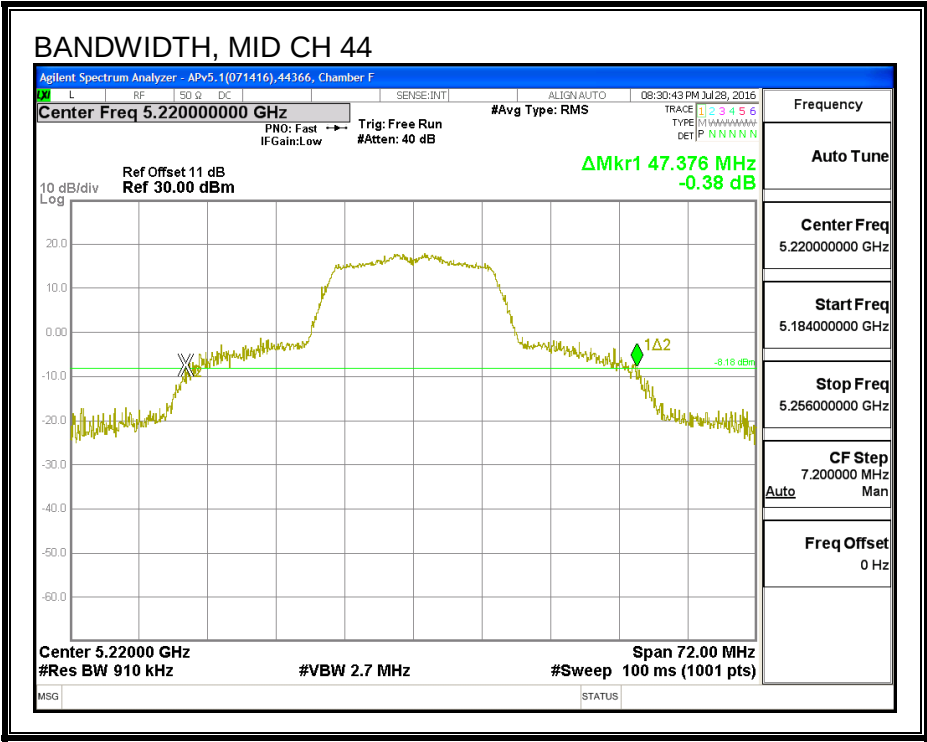

8.2.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.797
Mid	5200	18.030
Mid	5220	18.553
High	5240	17.391

99% BANDWIDTH

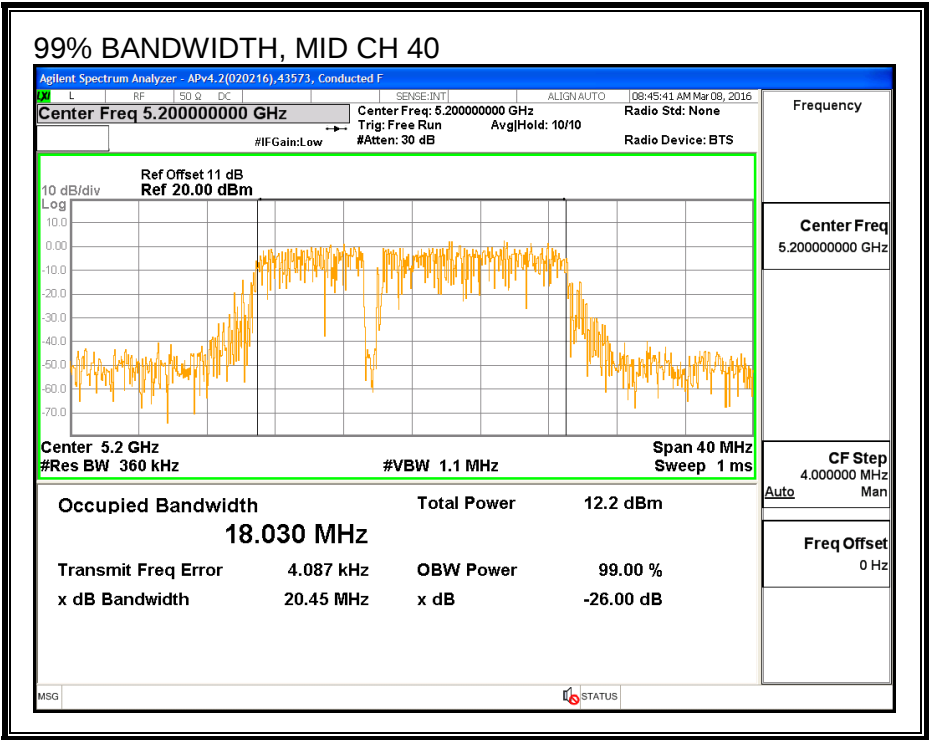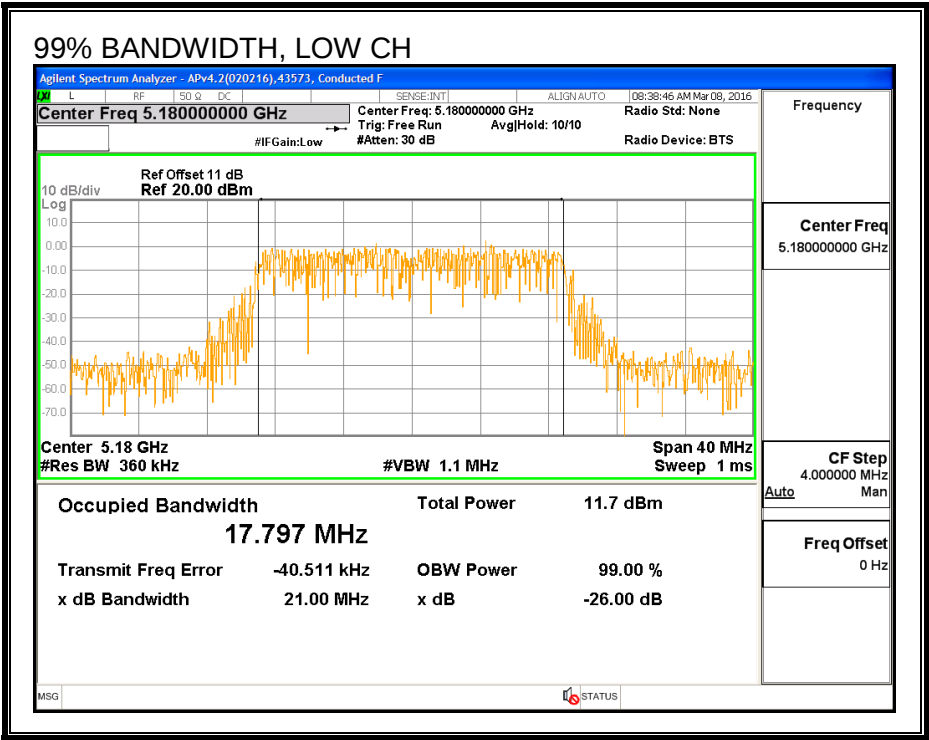

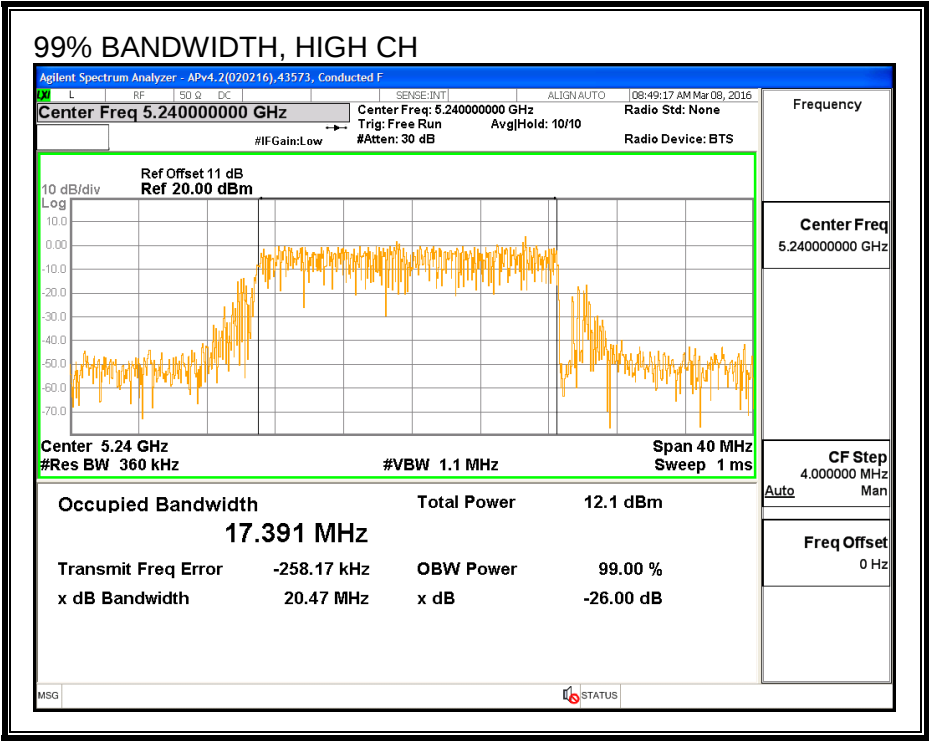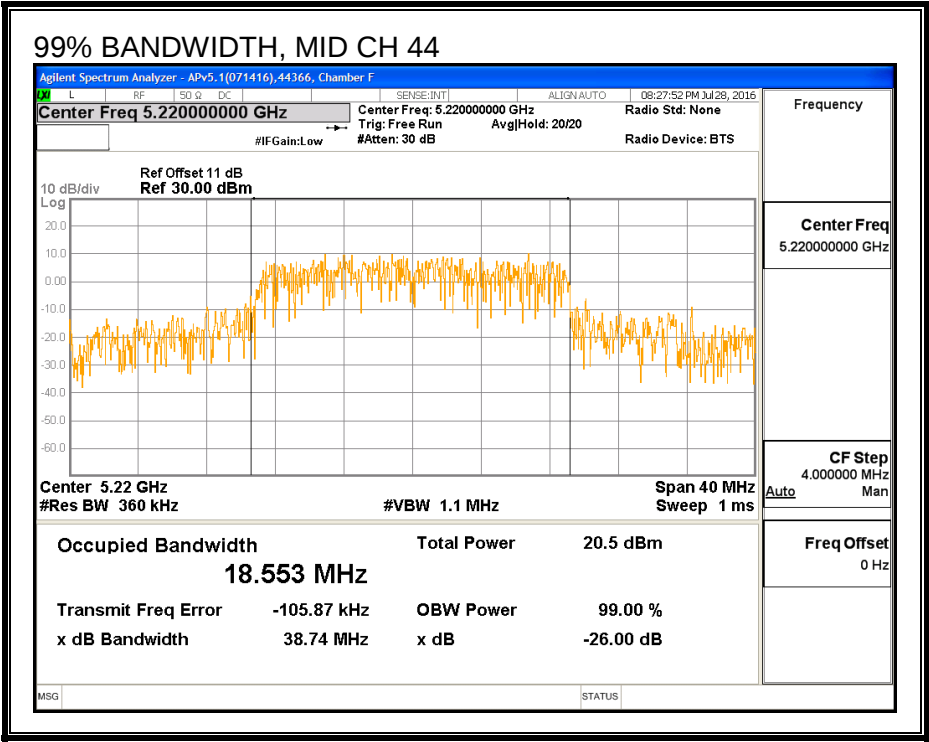

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	44366	Date:	7/28/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	17.49
Mid	5200	19.00
Mid	5220	20.44
High	5240	19.46

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	44366	Date:	7/28/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-1.48	-1.48	24.00	11.00
Mid	5200	-1.48	-1.48	24.00	11.00
Mid	5220	-1.48	-1.48	24.00	11.00
High	5240	-1.48	-1.48	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results



Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.49	17.49	24.00	-6.51
Mid	5200	19.00	19.00	24.00	-5.00
Mid	5220	20.44	20.44	24.00	-3.56
High	5240	19.46	19.46	24.00	-4.54

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.30	6.30	11.00	-4.70
Mid	5200	9.79	9.79	11.00	-1.21
Mid	5220	9.50	9.50	11.00	-1.50
High	5240	8.57	8.57	11.00	-2.43

PSD

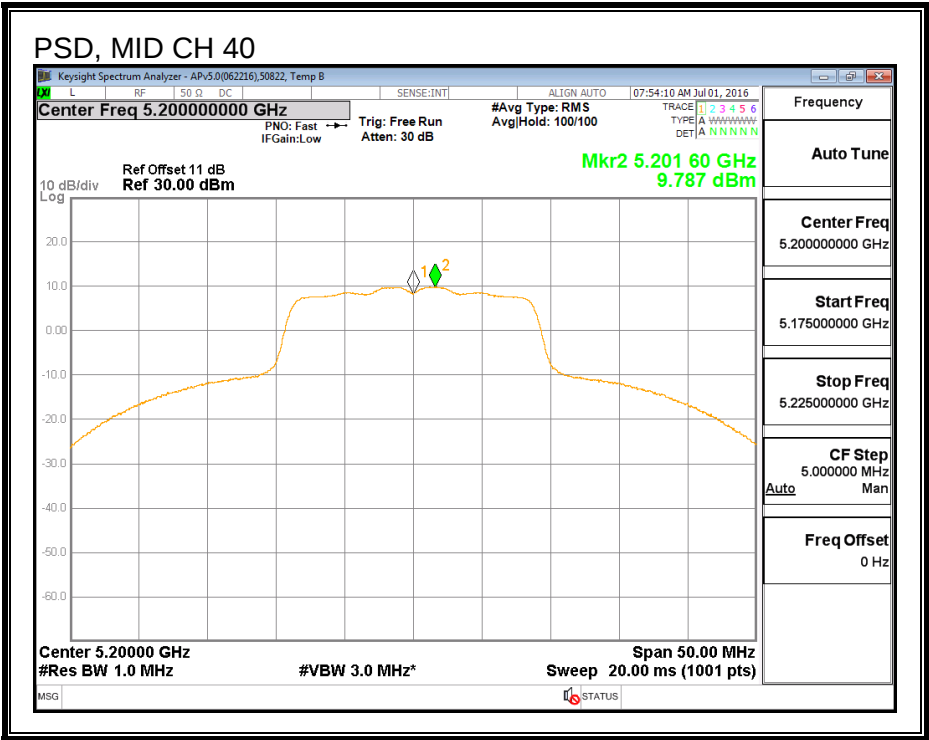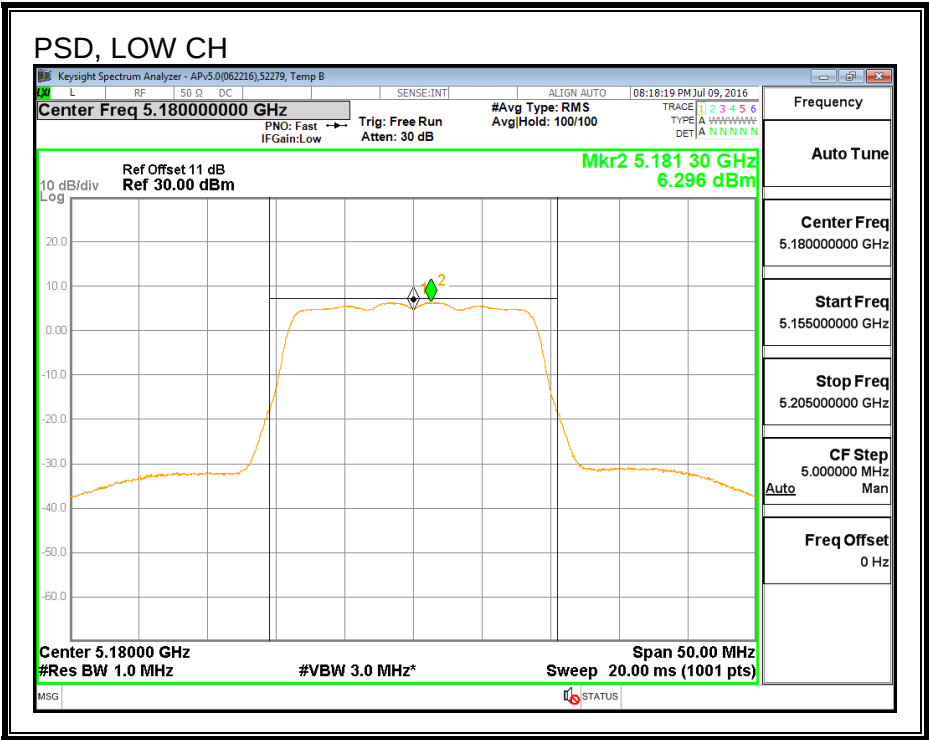

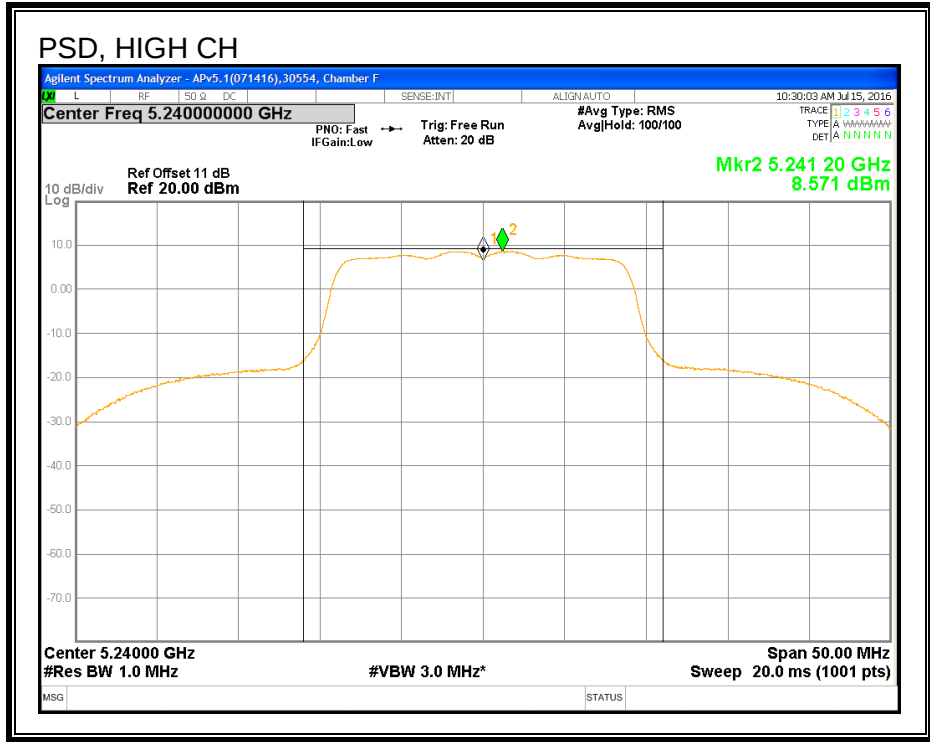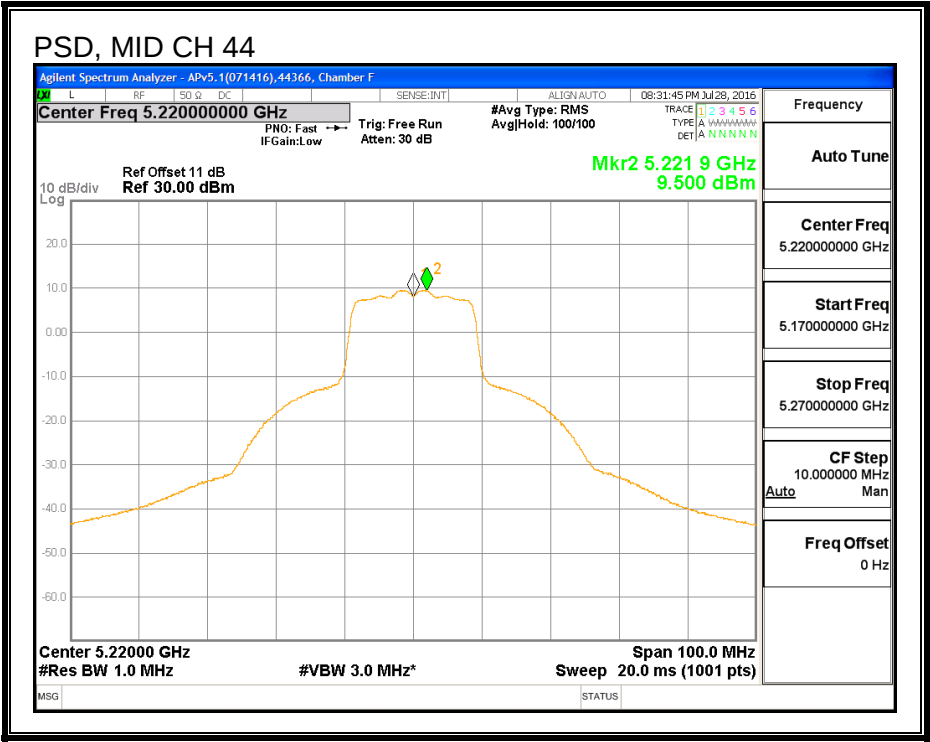

8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	22.032	21.681
Mid	5200	21.978	21.813
High	5240	22.066	21.549



26 DB BANDWIDTH, CHAIN 0

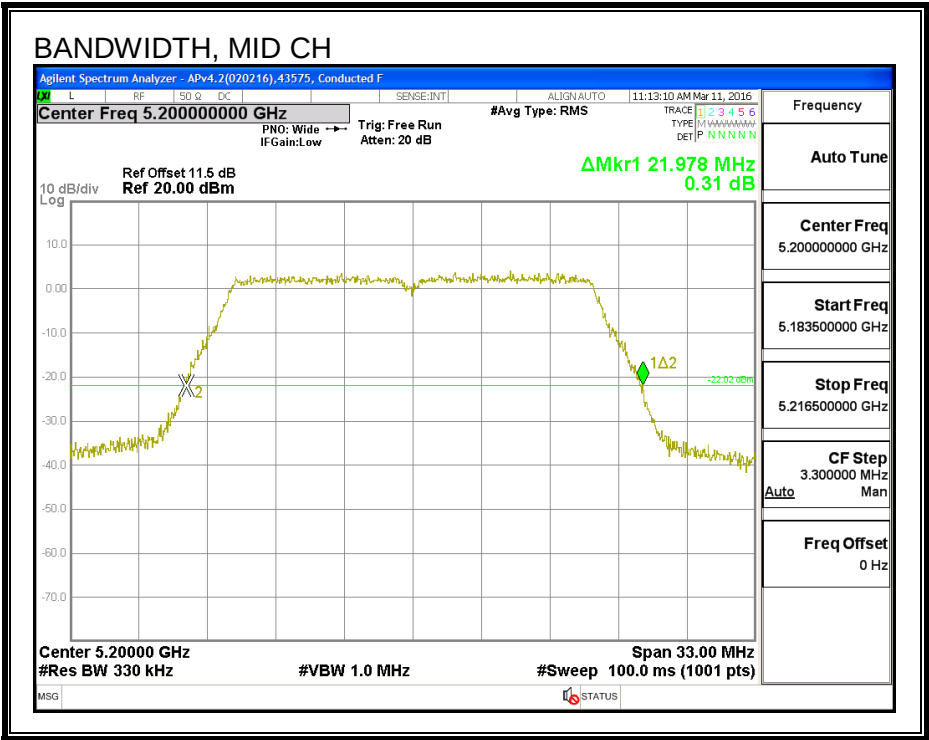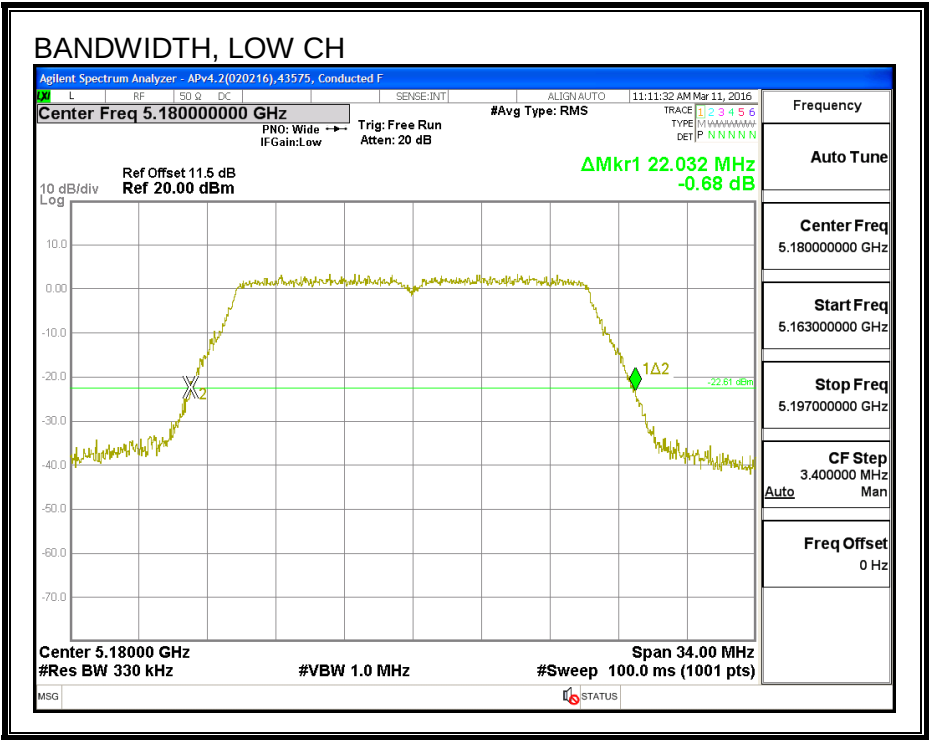

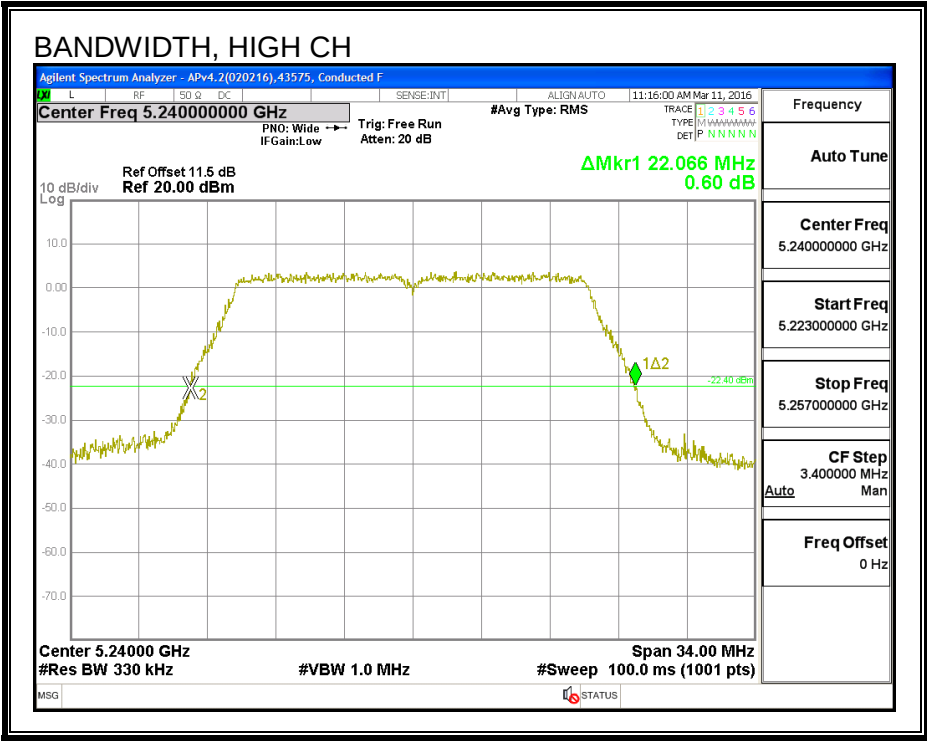

26 DB BANDWIDTH, CHAIN 1

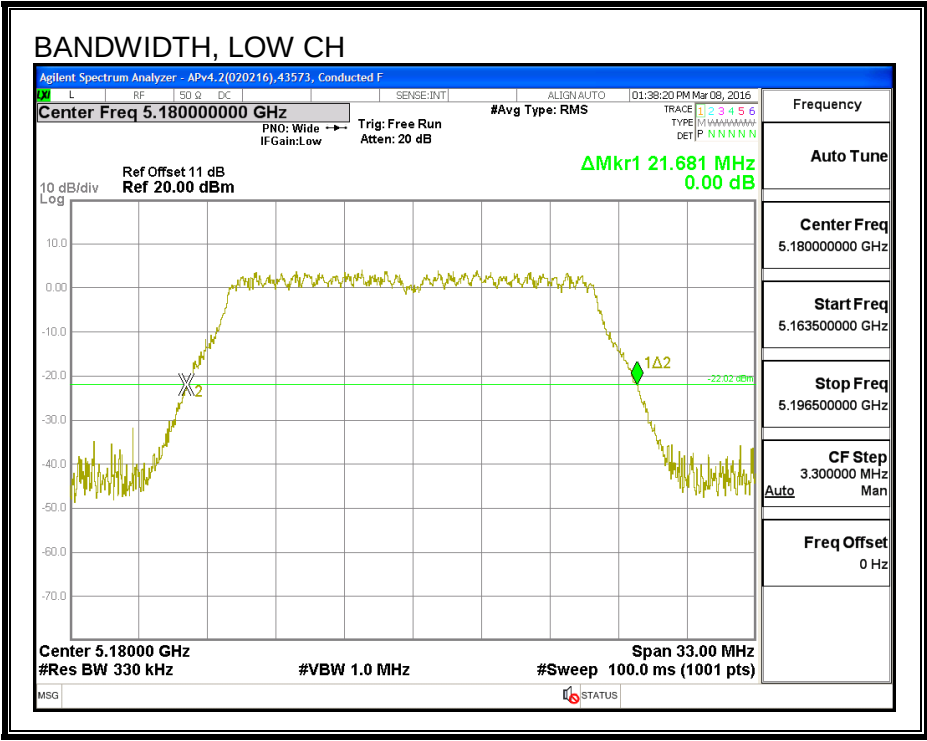

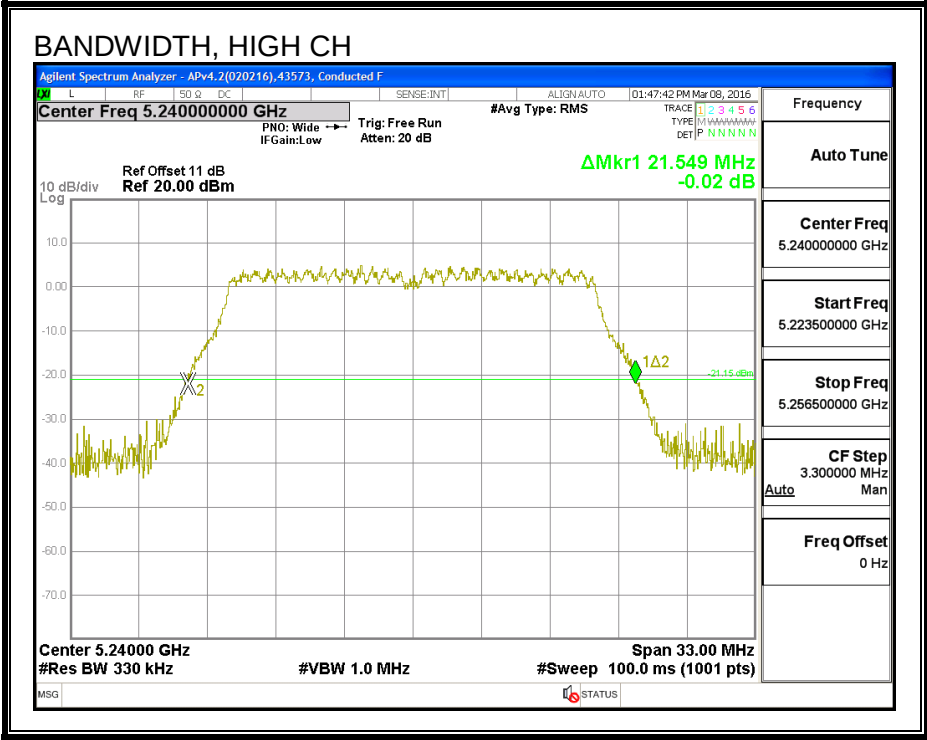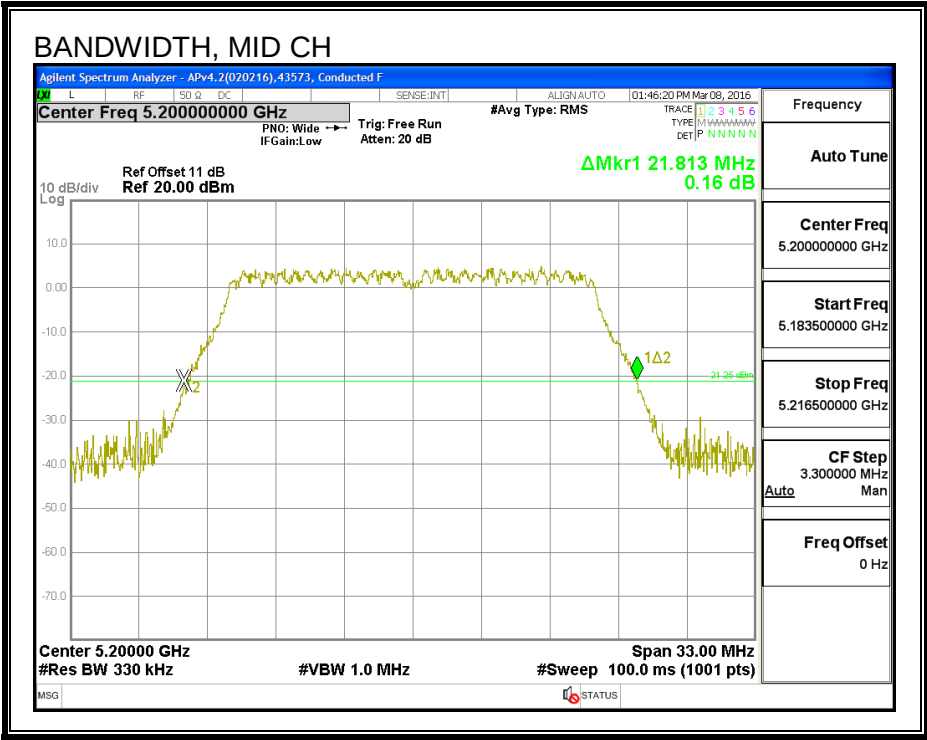

8.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.829	17.693
Mid	5200	17.704	17.780
High	5240	17.835	17.879



99% BANDWIDTH, CHAIN 0

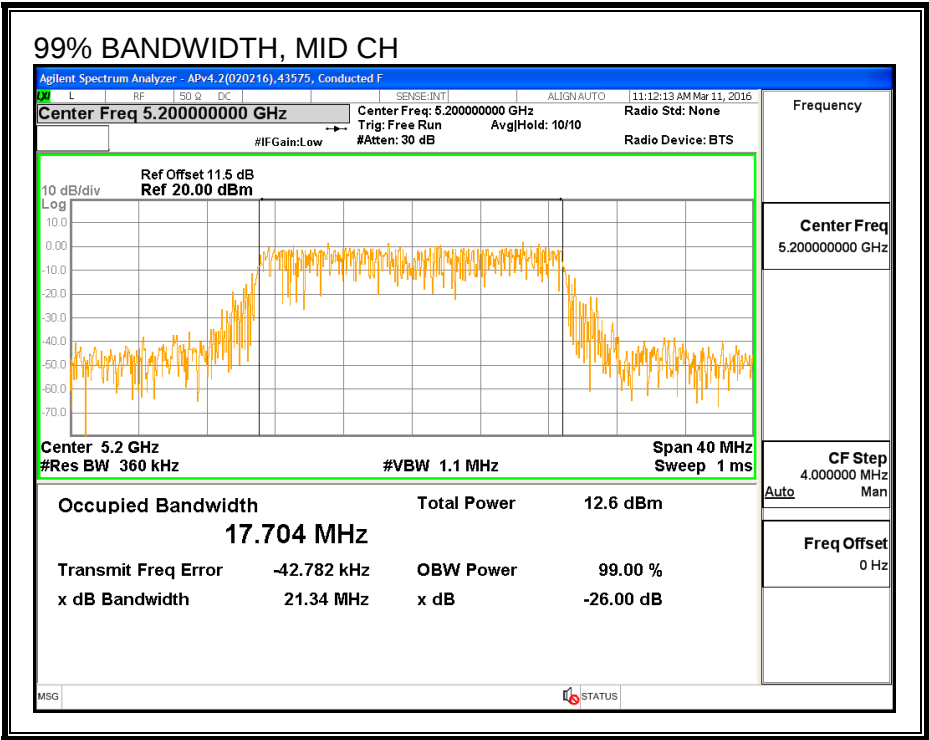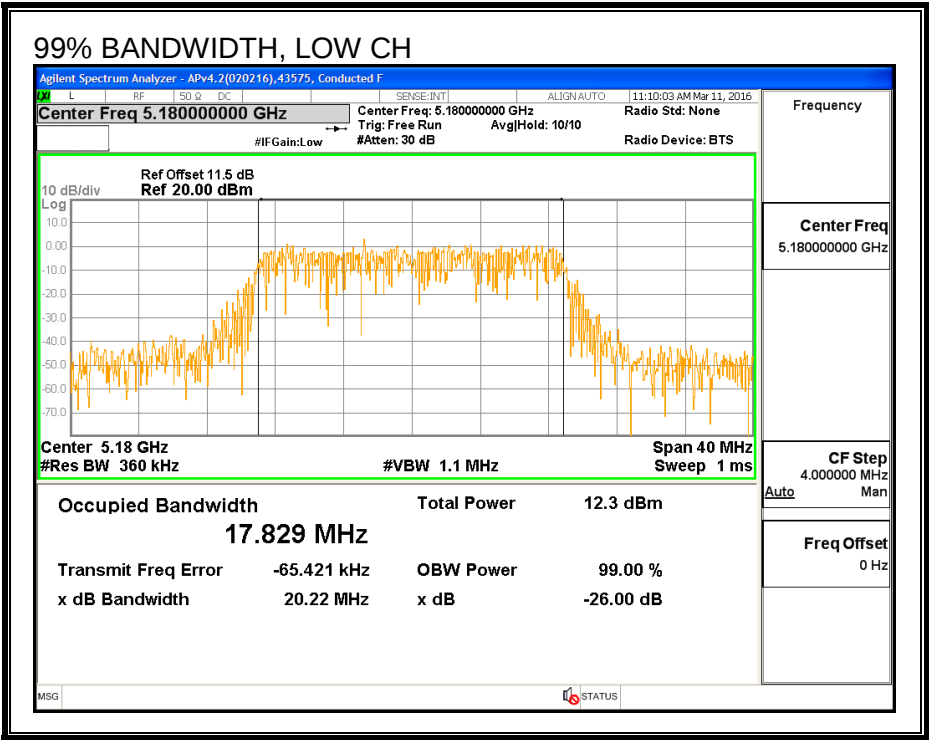

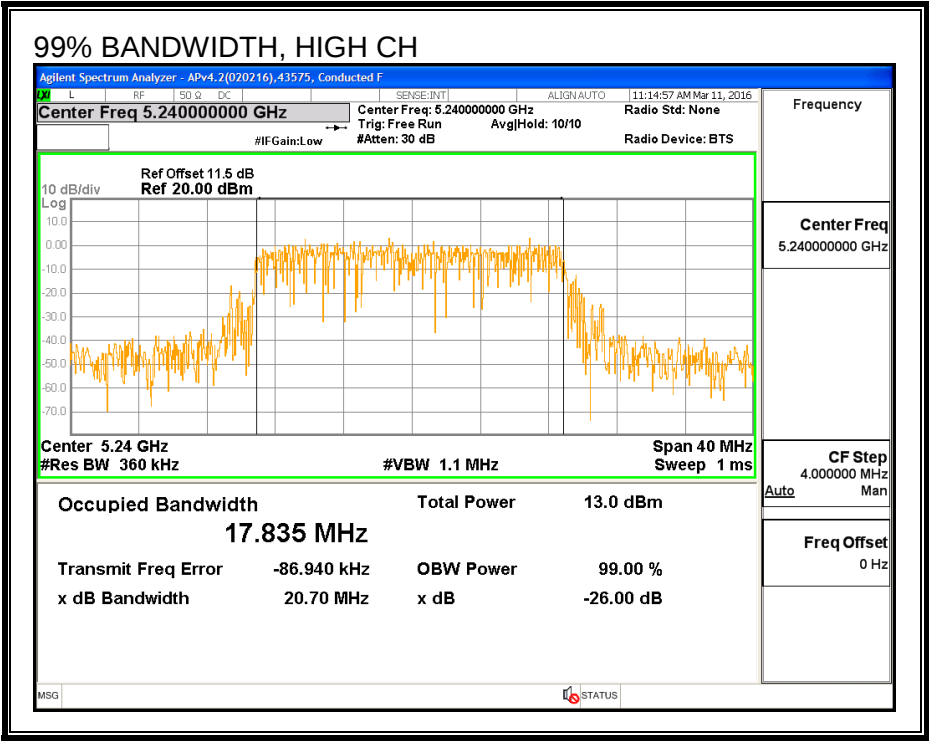

99% BANDWIDTH, CHAIN 1

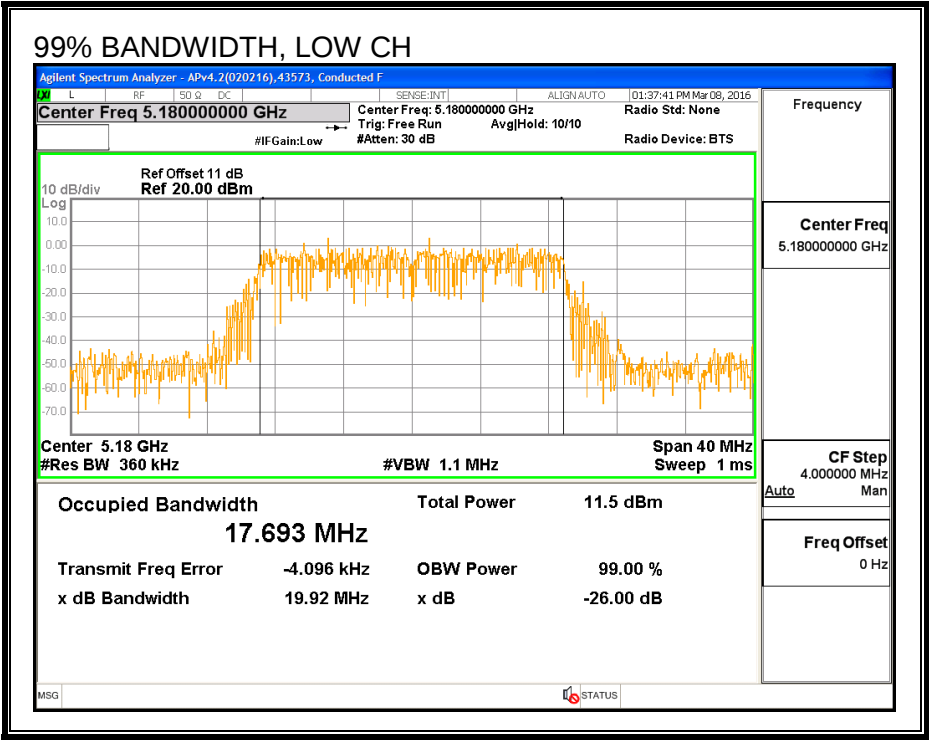

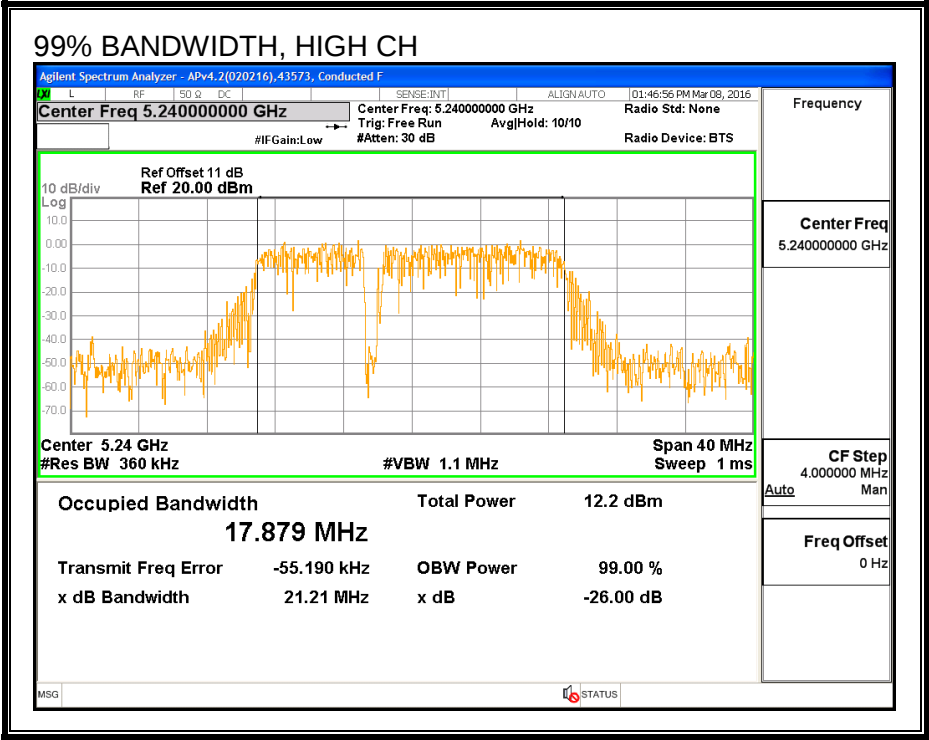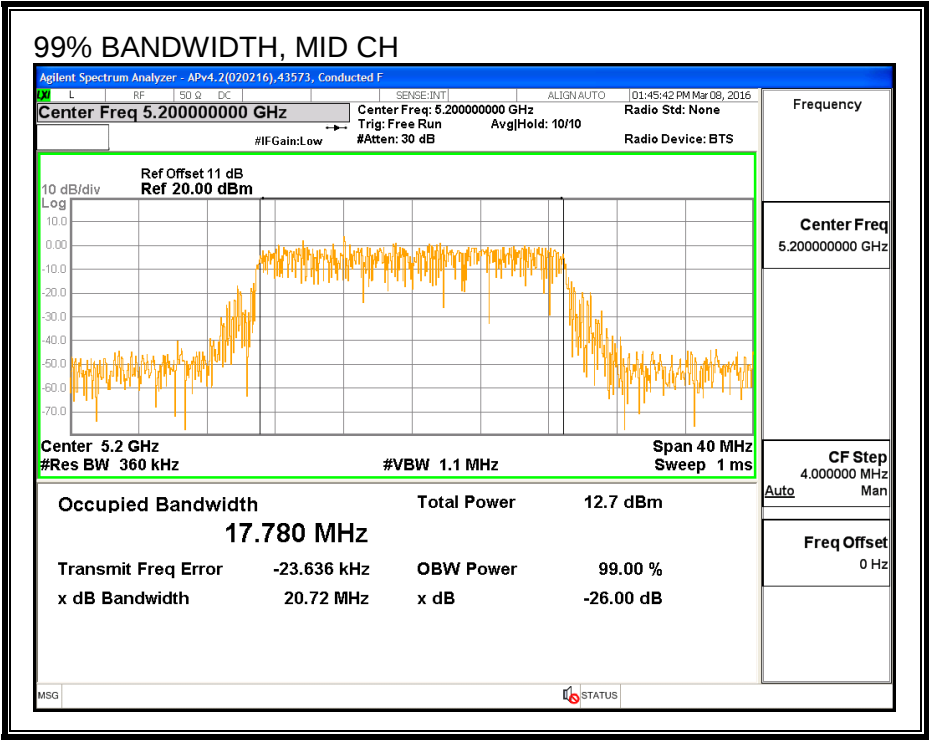

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	16.756	16.835	19.81
Mid	5200	17.825	17.909	20.88
High	5240	17.915	17.992	20.96

8.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-5.15	-1.48	-2.94

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-5.15	-1.48	-0.11

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-2.94	-0.11	24.00	11.00
Mid	5200	-2.94	-0.11	24.00	11.00
High	5240	-2.94	-0.11	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.756	16.835	19.81	24.00	-4.19
Mid	5200	17.825	17.909	20.88	24.00	-3.12
High	5240	17.915	17.992	20.96	24.00	-3.04

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	5.76	5.66	8.72	11.00	-2.28
Mid	5200	7.00	7.00	10.01	11.00	-0.99
High	5240	7.11	7.11	10.12	11.00	-0.88



PSD, CHAIN 0

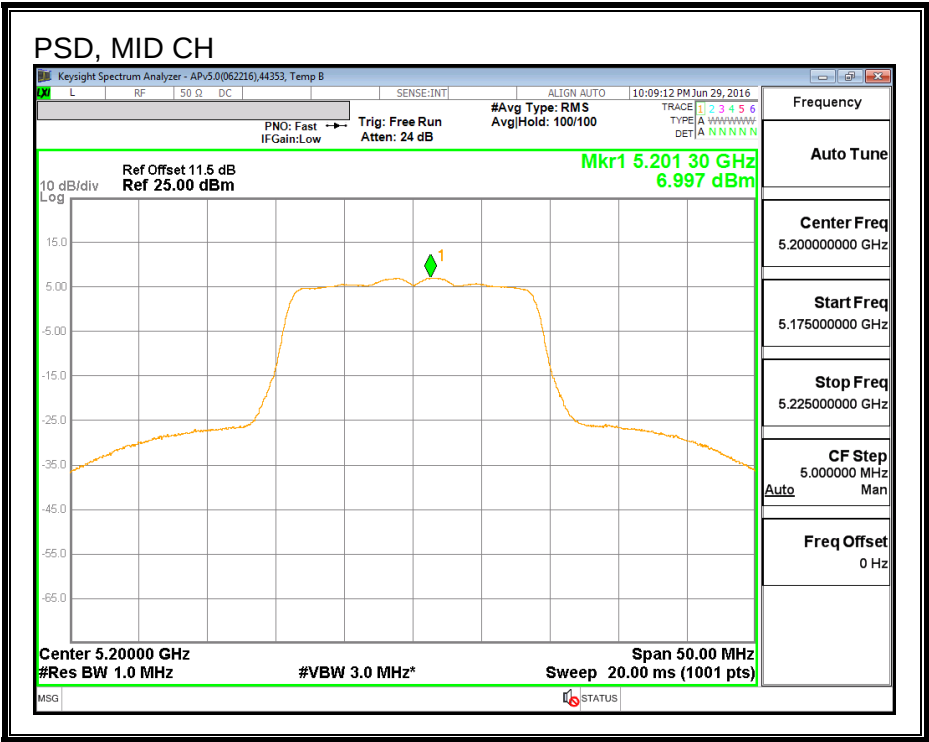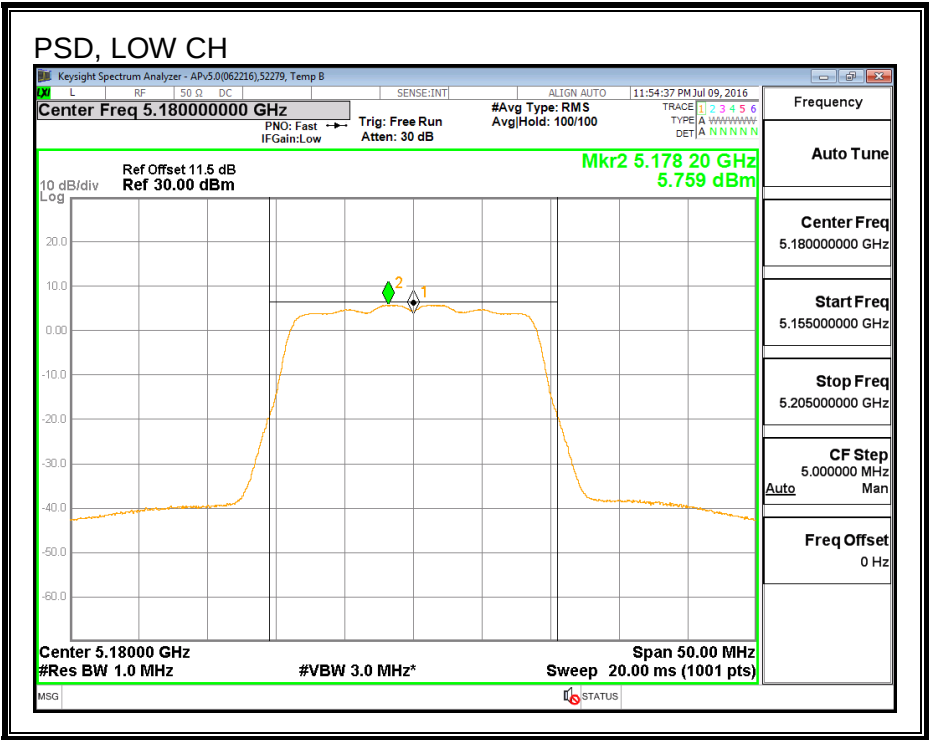

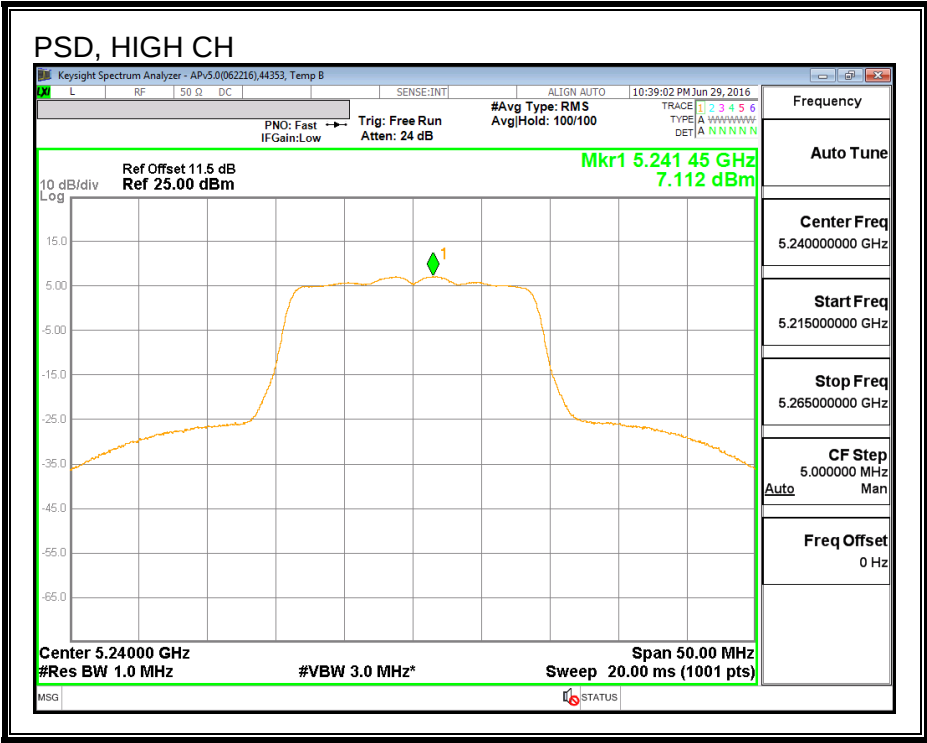

PSD, CHAIN 1

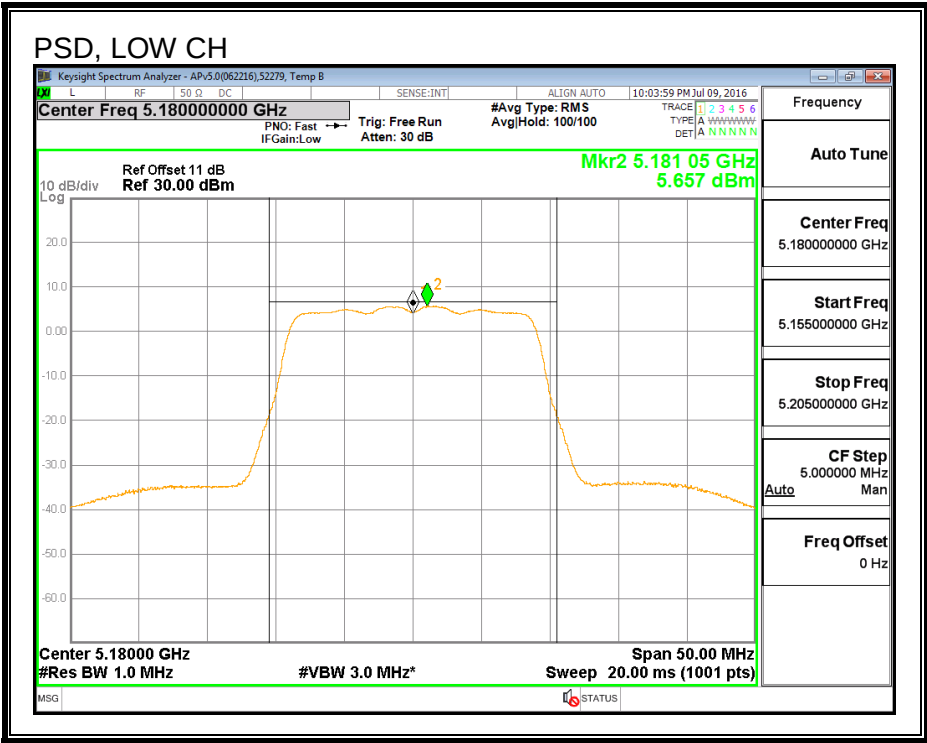

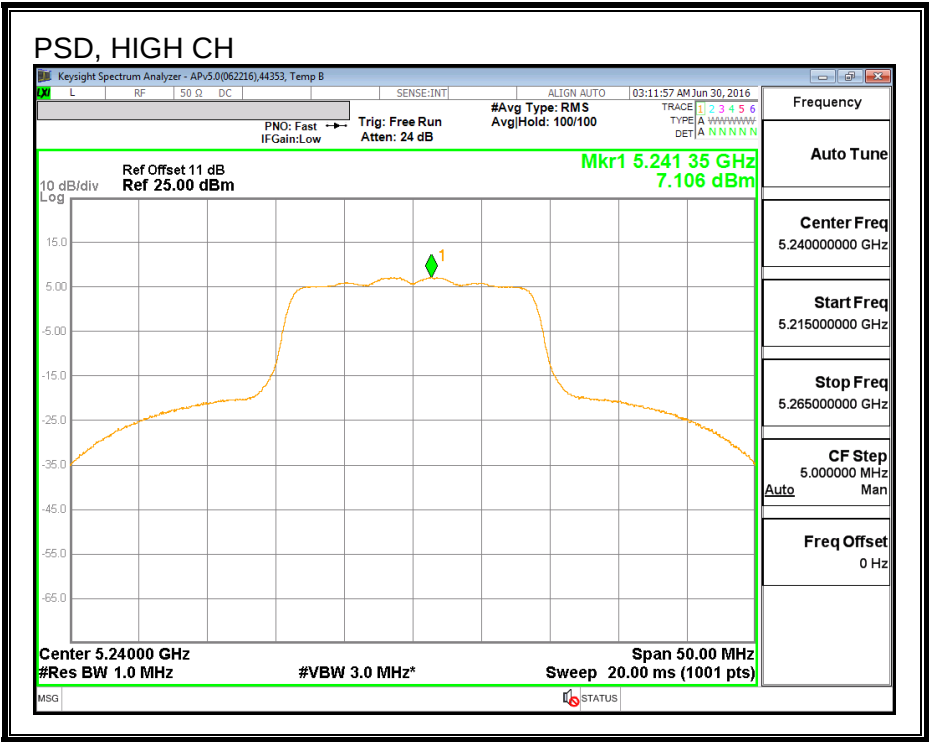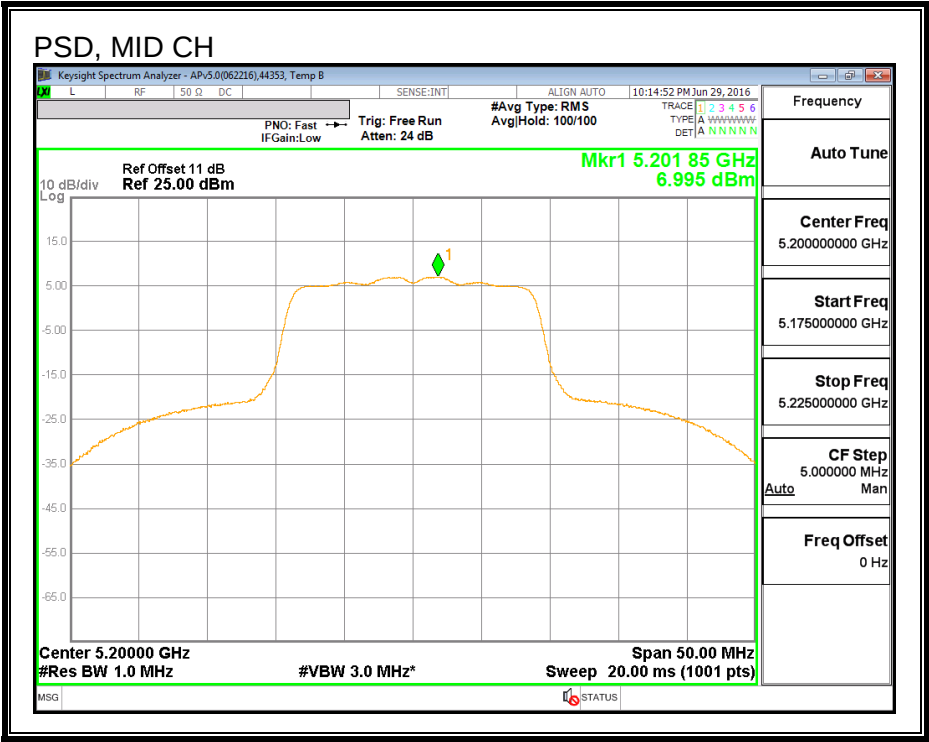

8.4. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.4.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.382
High	5230	40.565

26 dB BANDWIDTH

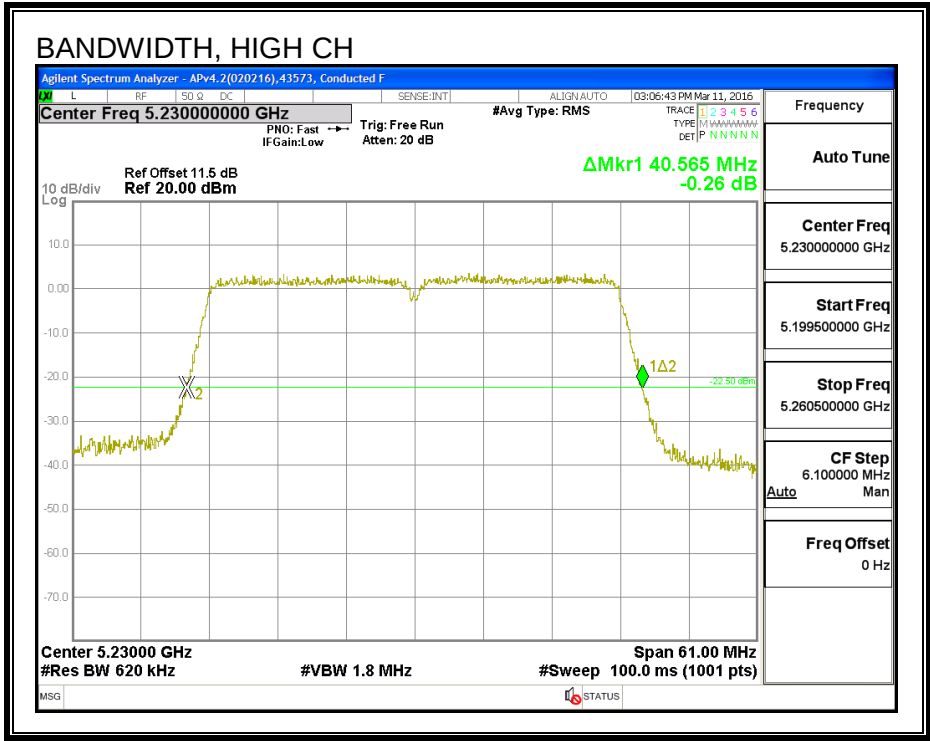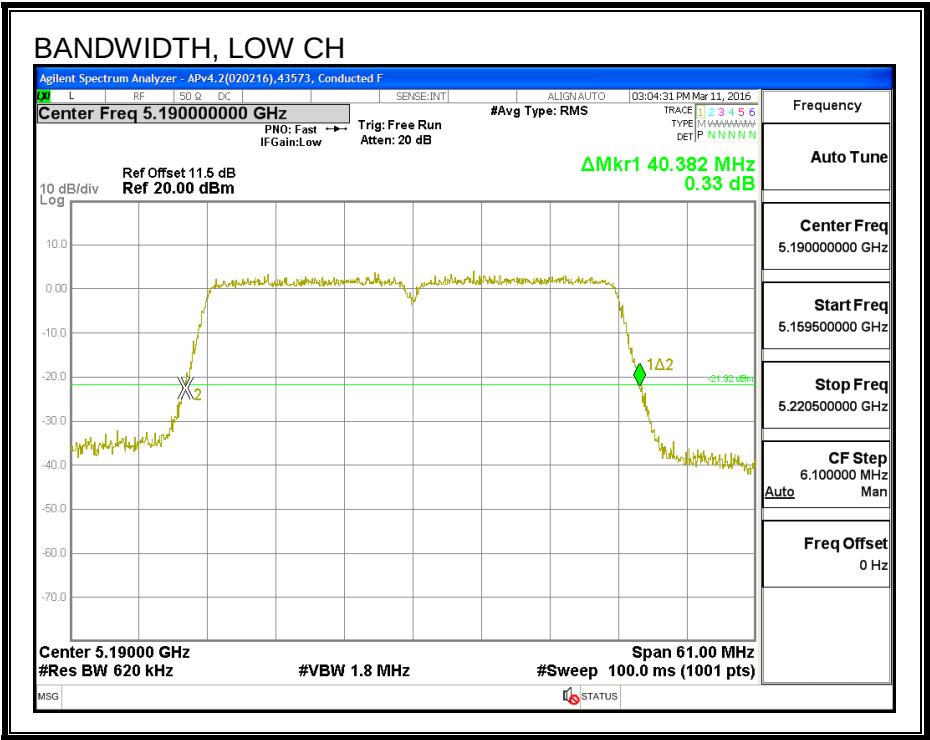

8.4.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.301
High	5230	36.518

99% BANDWIDTH

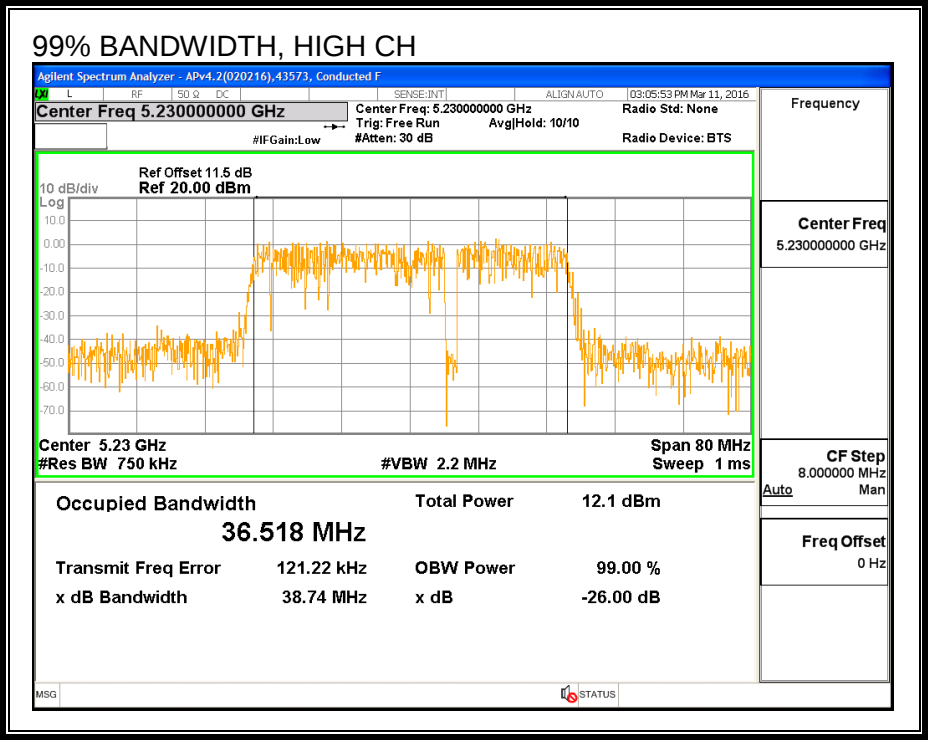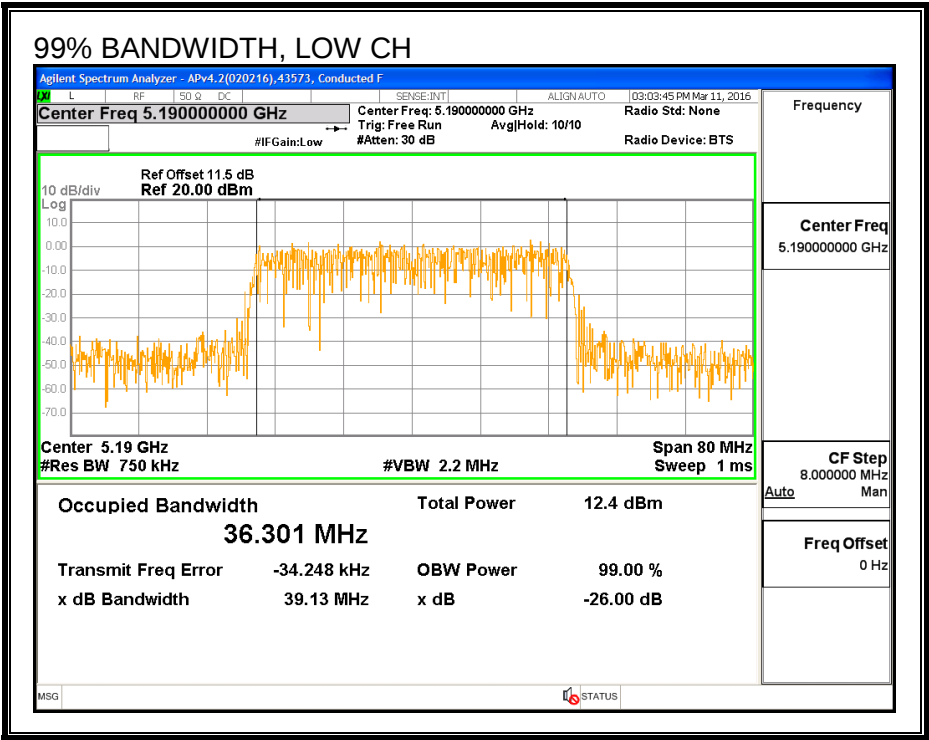

8.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	15.33
High	5230	18.47

8.4.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-5.15	-5.15	24.00	11.00
High	5230	-5.15	-5.15	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'PSD
---------------------------	------	--------------------------------------



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	15.33	15.33	24.00	-8.68
High	5230	18.47	18.47	24.00	-5.53

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	1.40	1.40	11.00	-9.60
High	5230	4.49	4.49	11.00	-6.51

PSD

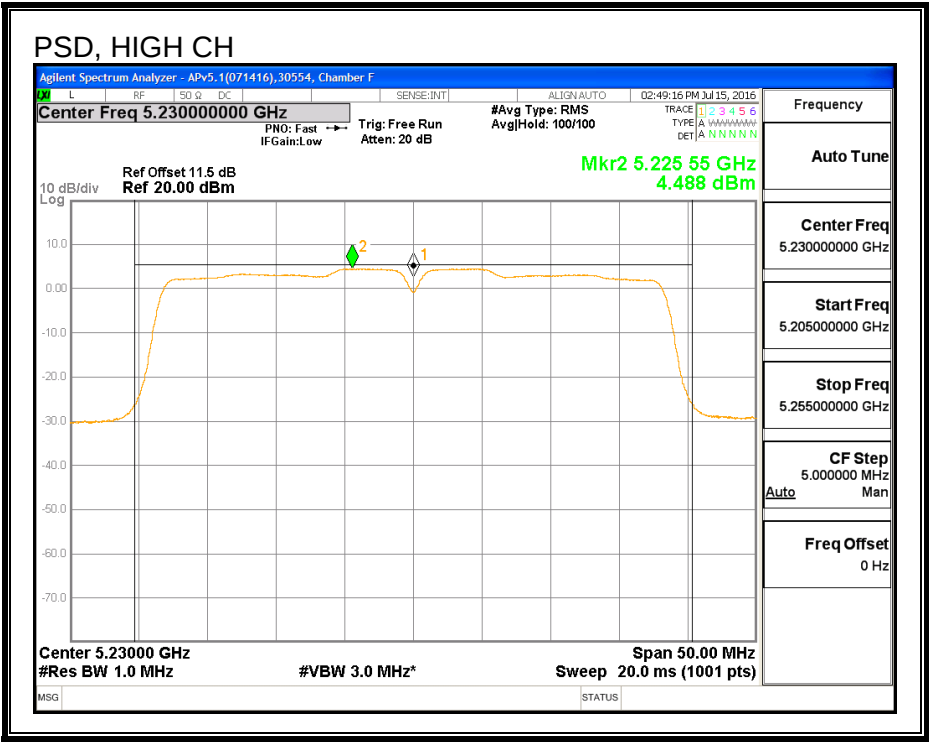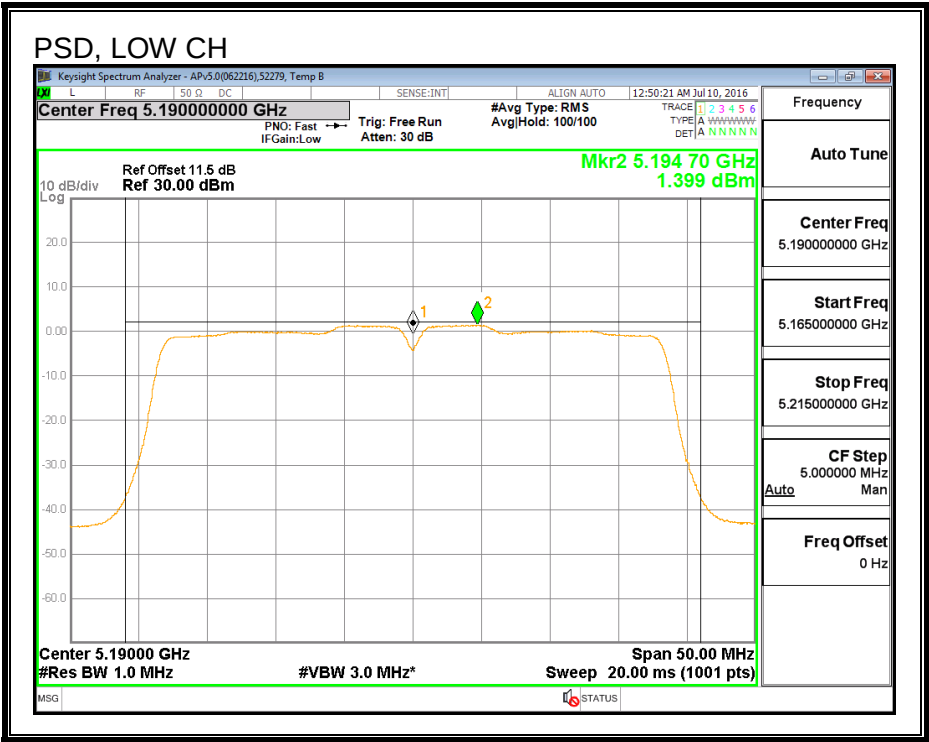

8.5. 802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.504
High	5230	40.626

26 dB BANDWIDTH

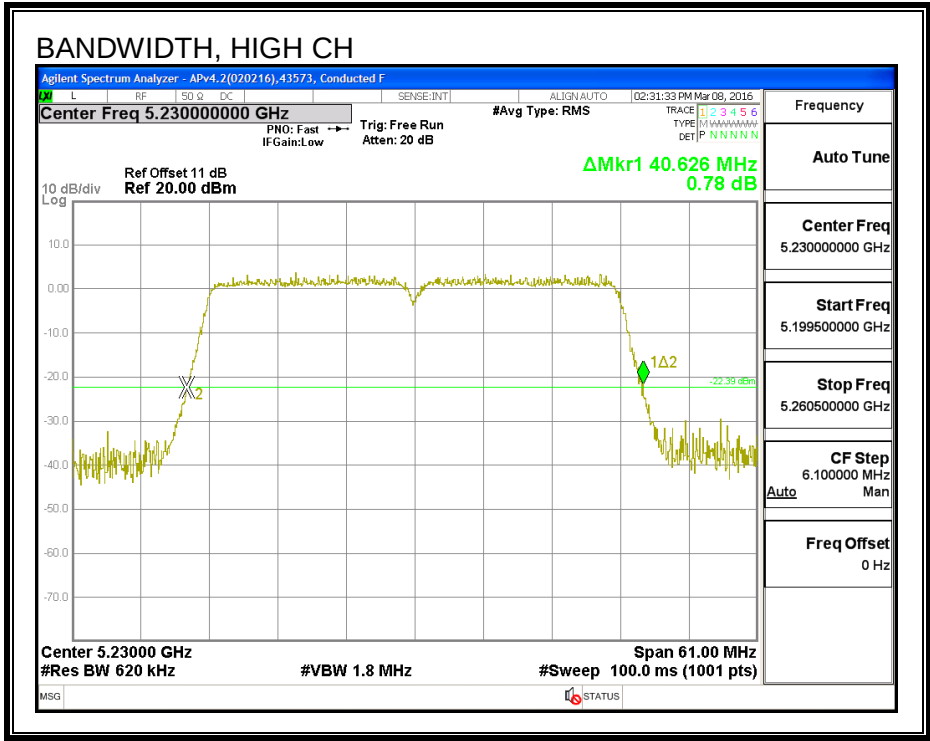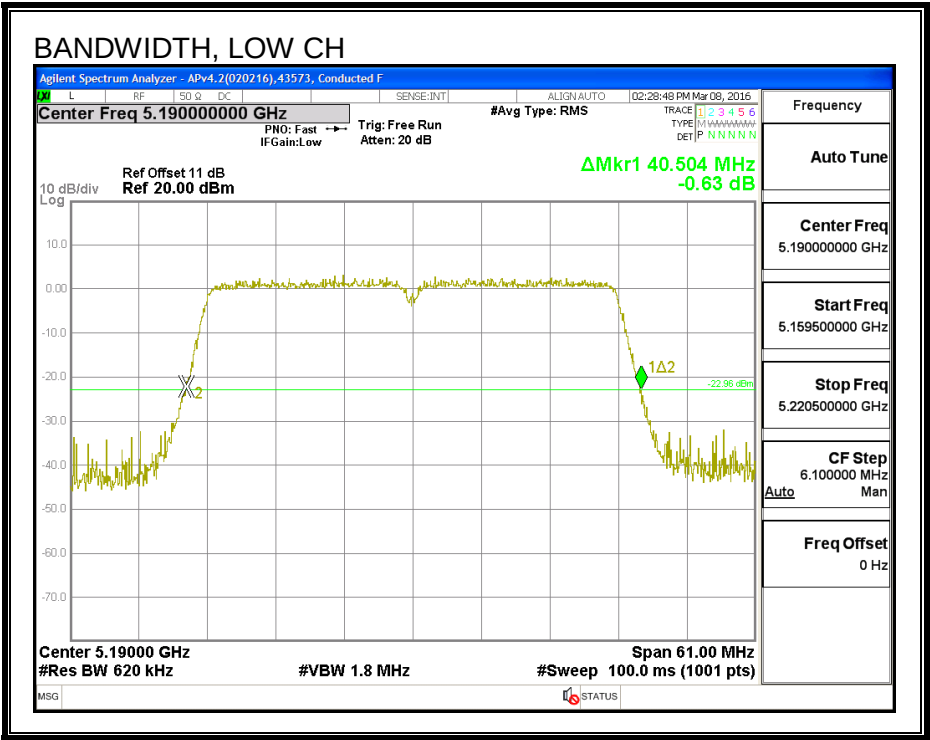

8.5.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.437
High	5230	36.406

99% BANDWIDTH

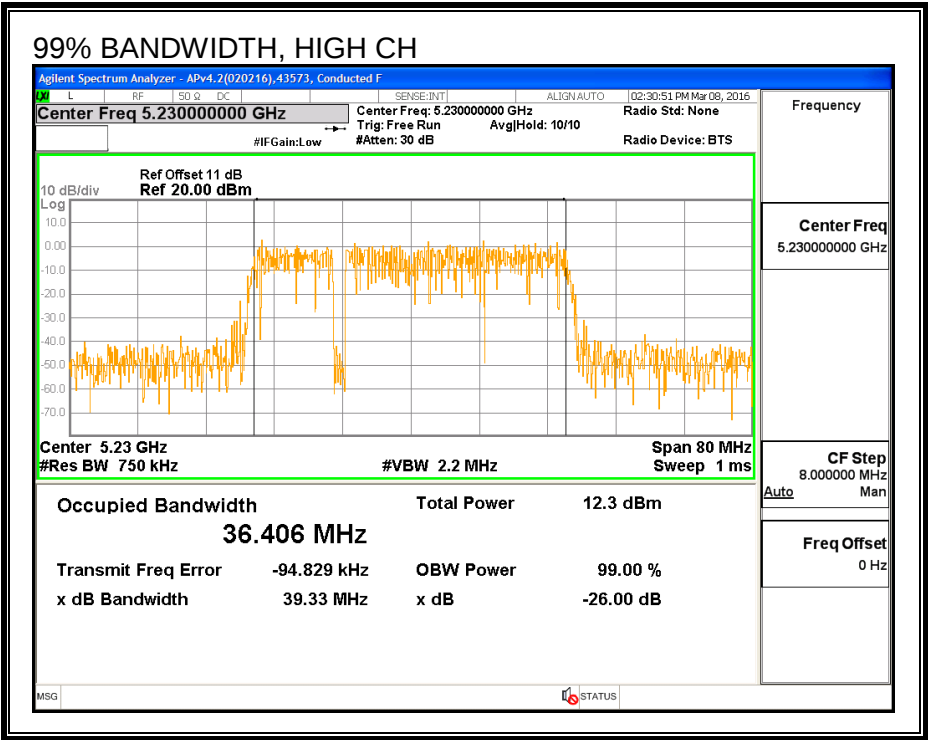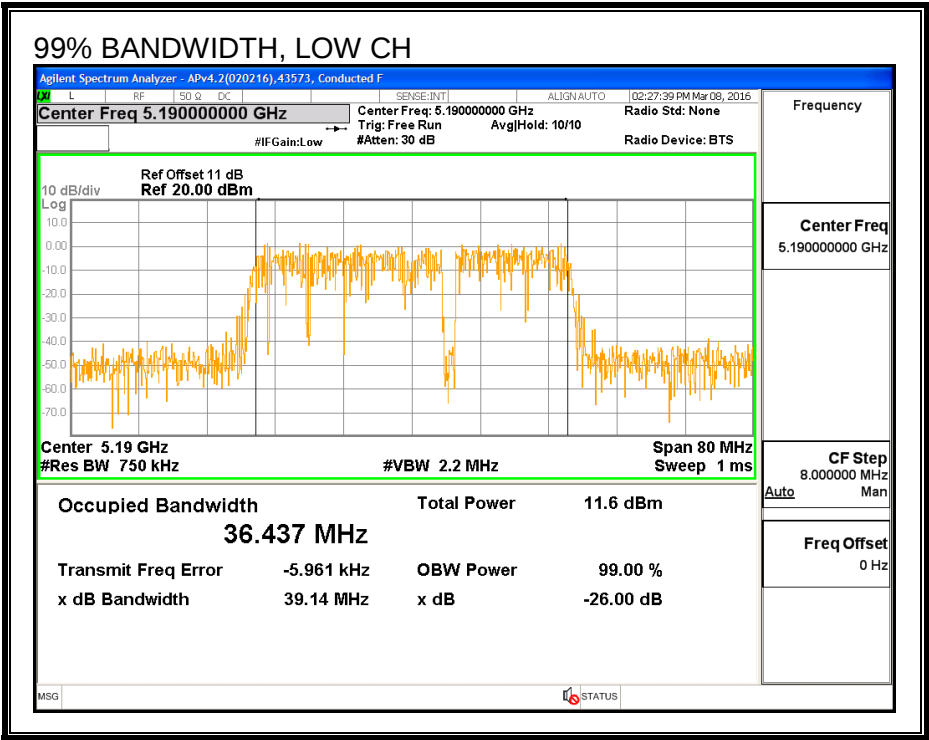

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	15.37
High	5230	18.36

8.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-1.48	-1.48	24.00	11.00
High	5230	-1.48	-1.48	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	15.37	15.37	24.00	-8.63
High	5230	18.36	18.36	24.00	-5.64

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	1.43	1.43	11.00	-9.57
High	5230	4.30	4.30	11.00	-6.71

PSD

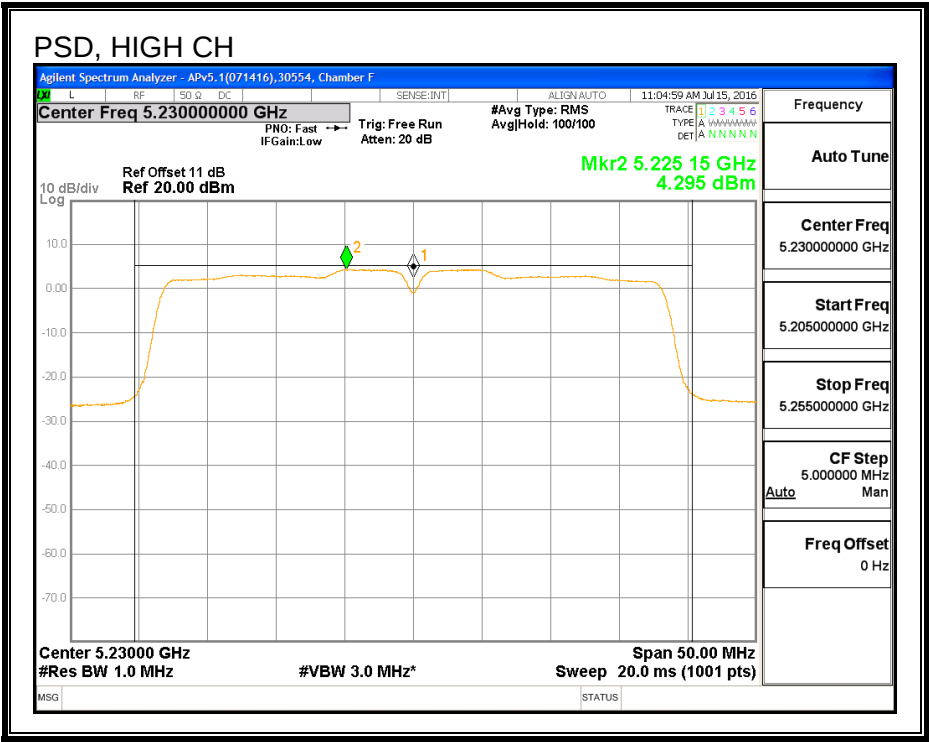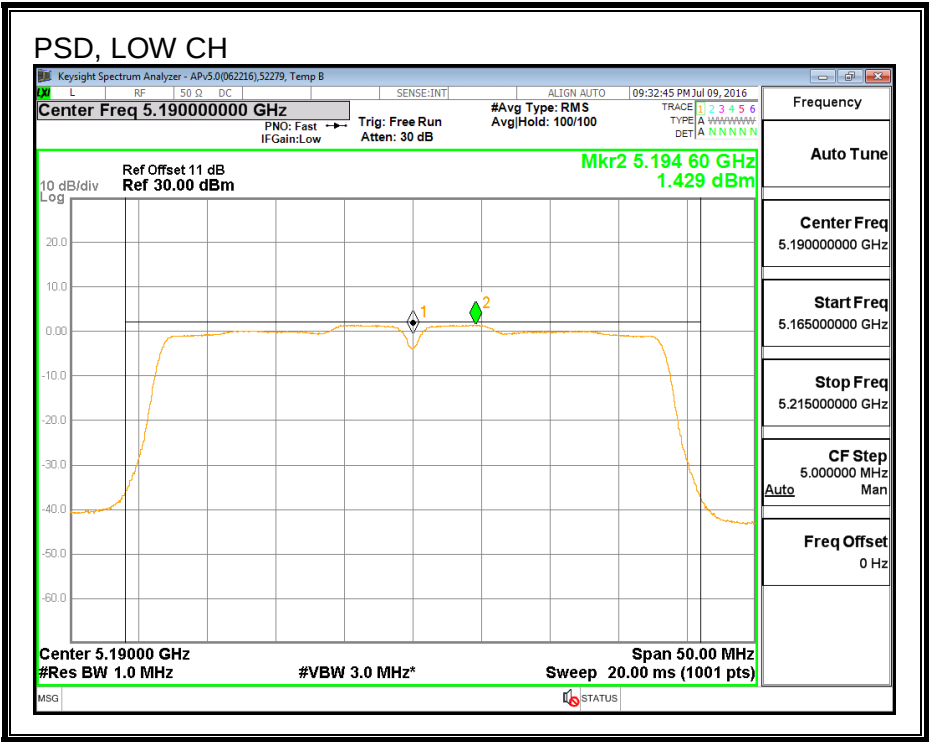

8.6. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND

8.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.565	39.955
High	5230	40.565	39.960

26 DB BANDWIDTH, CHAIN 0

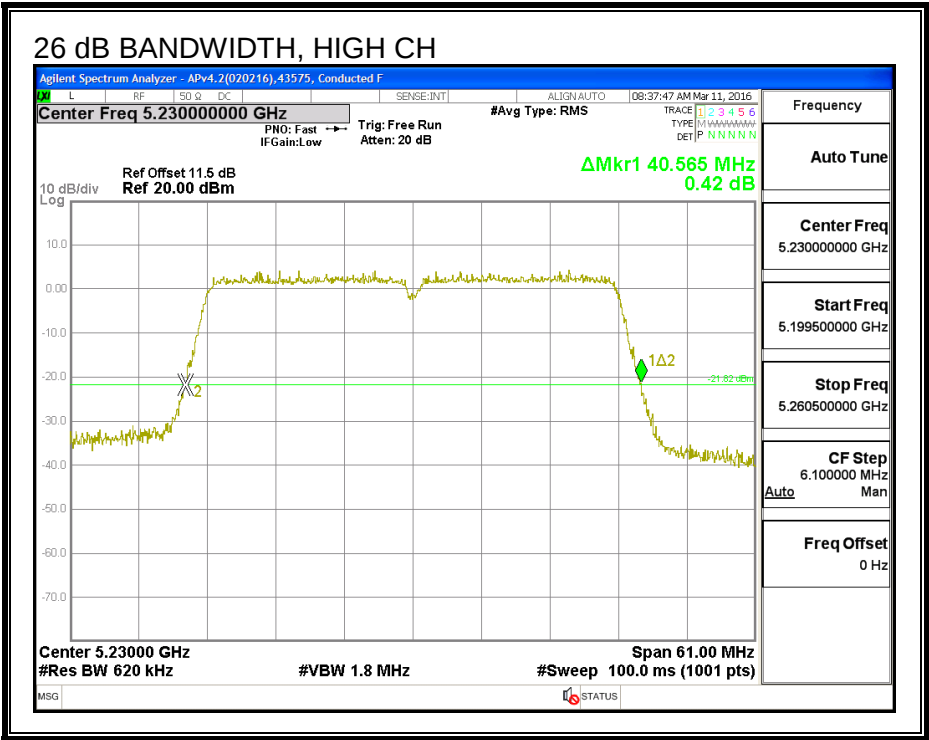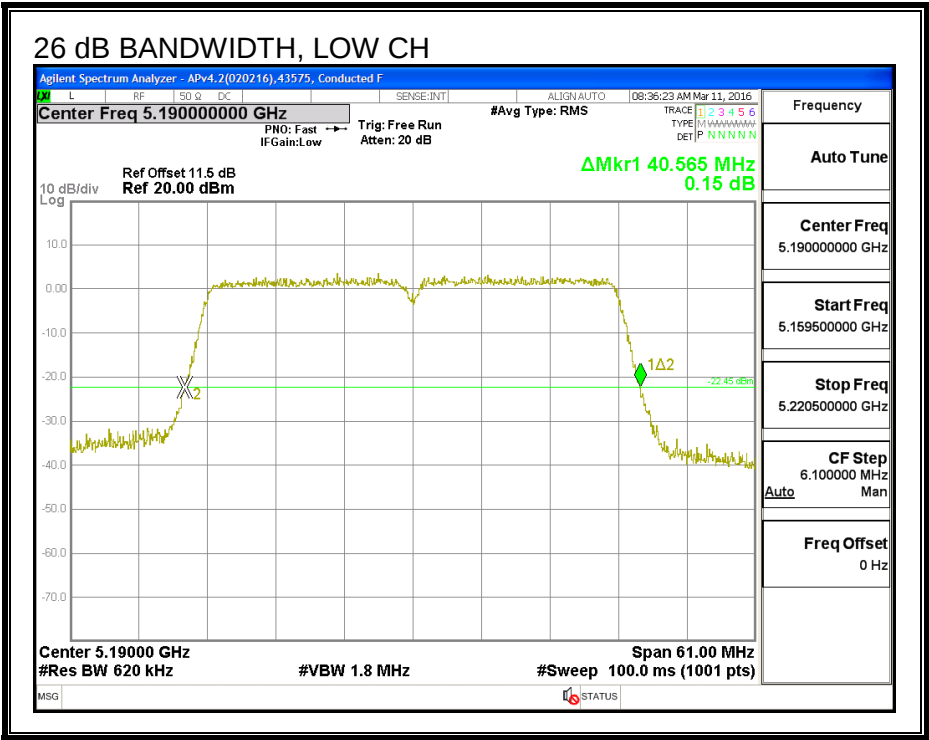

26 DB BANDWIDTH, CHAIN 1

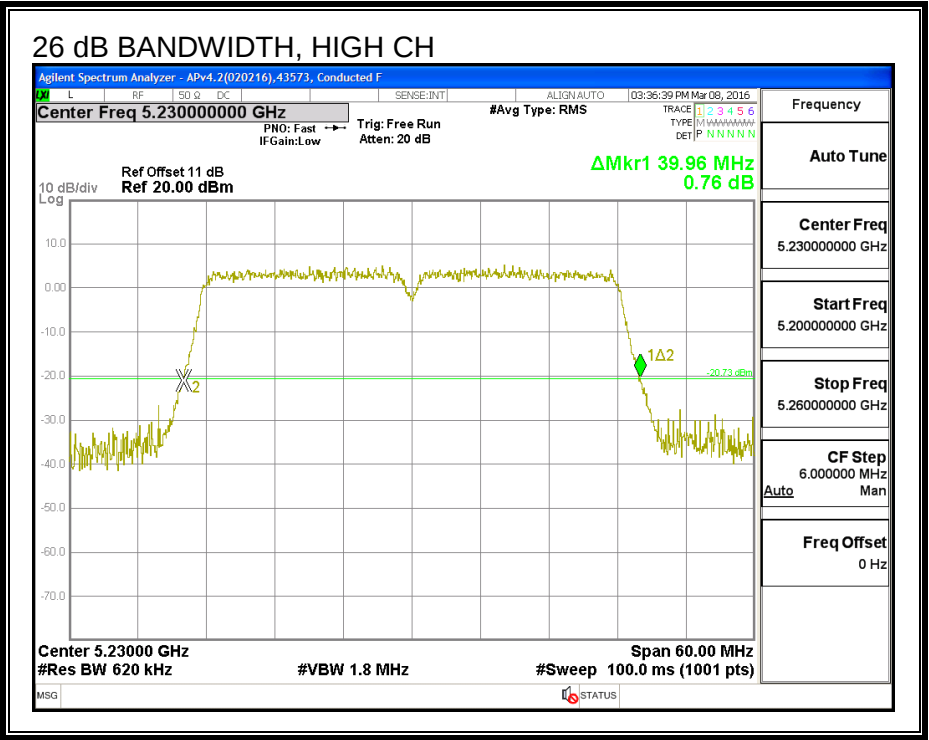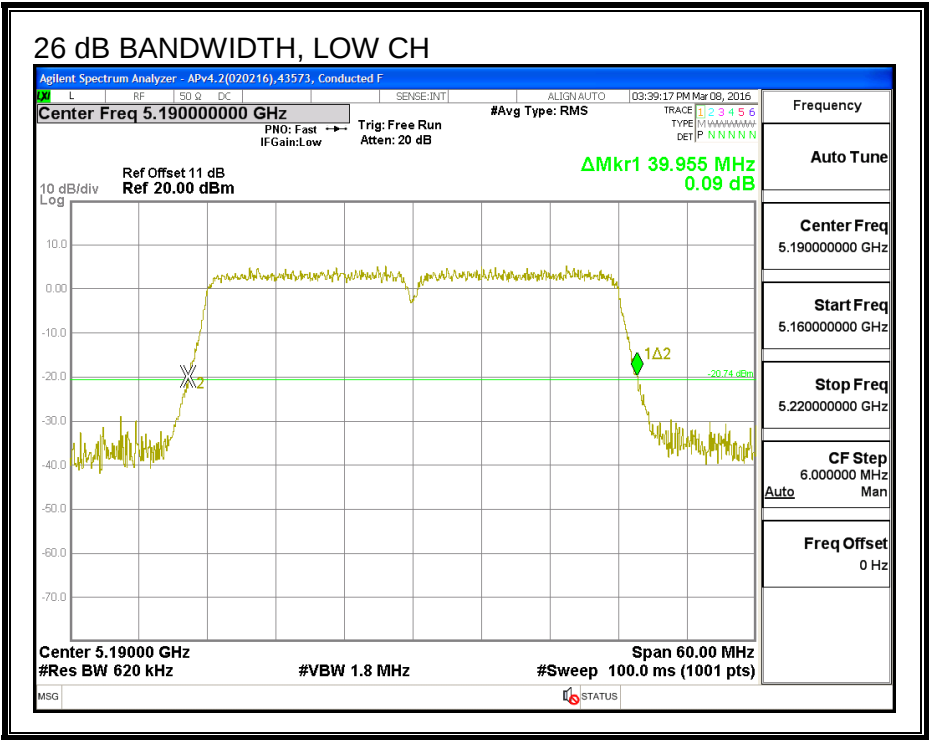

8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.403	35.622
High	5230	36.352	36.308

99% BANDWIDTH, CHAIN 0

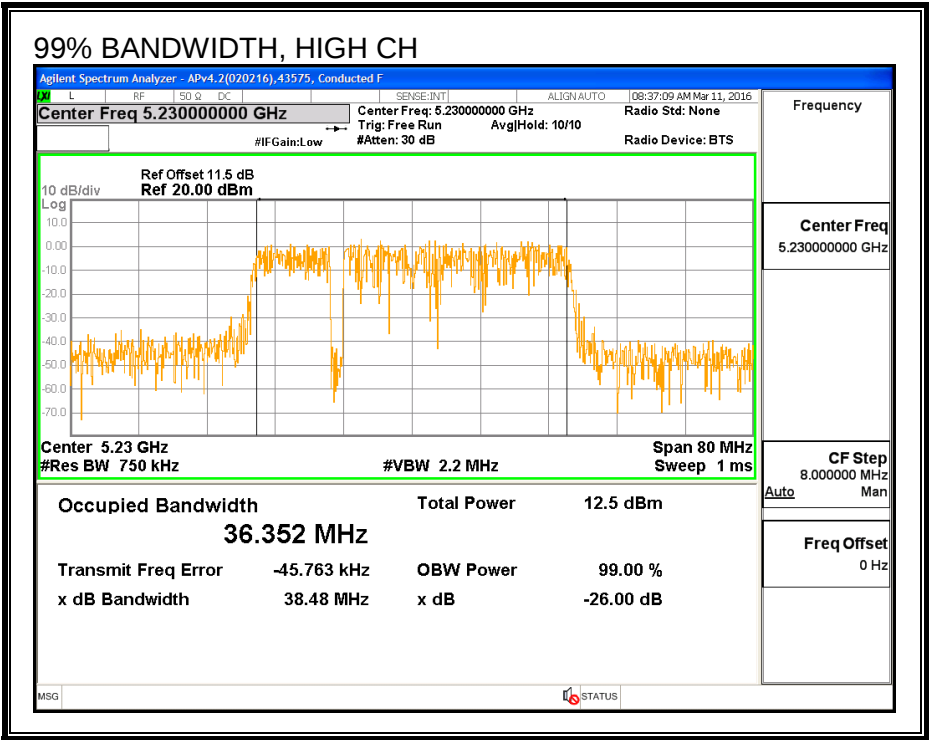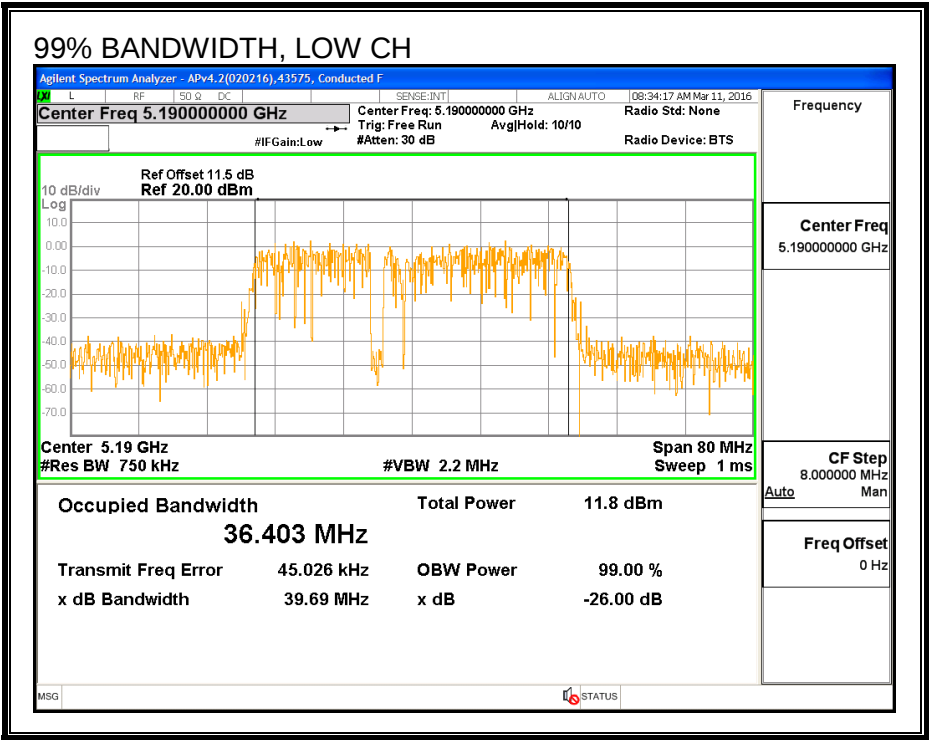

99% BANDWIDTH, CHAIN 1

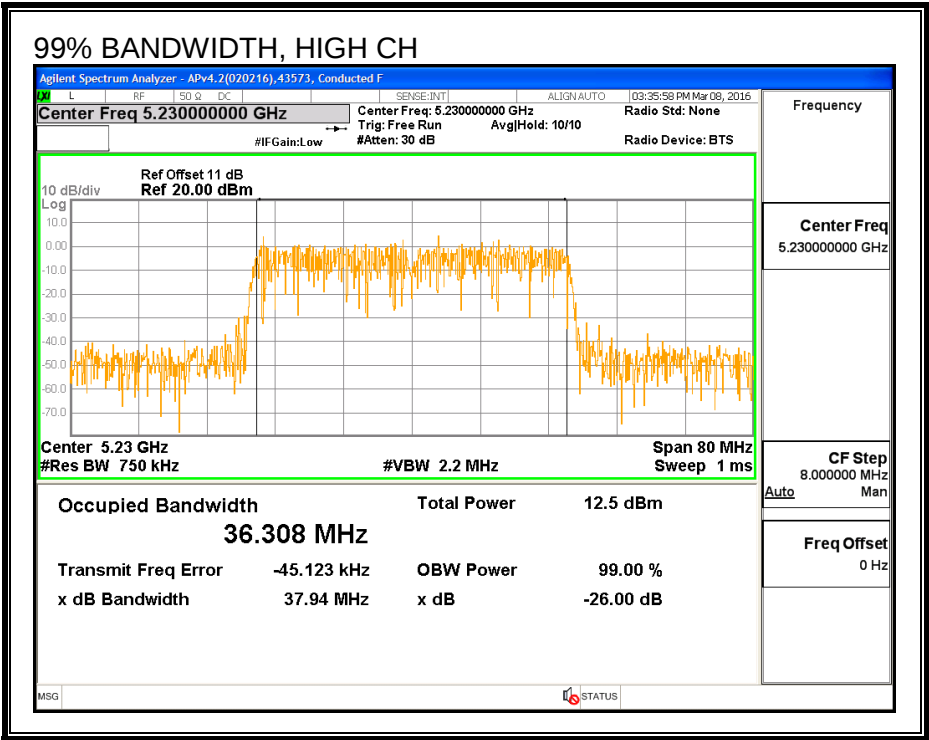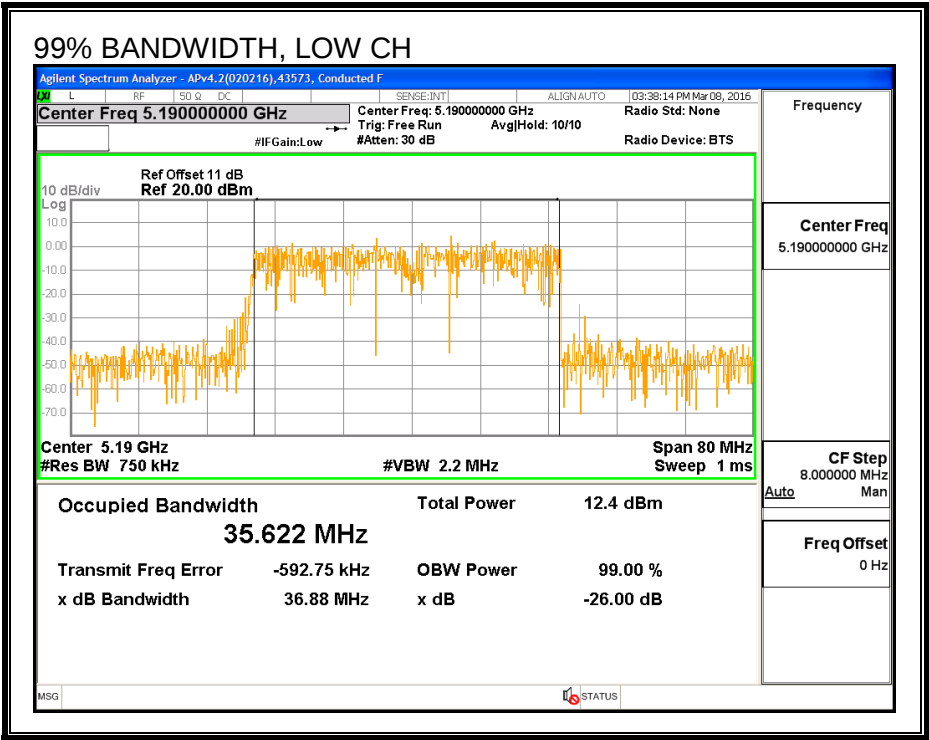

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	13.41	13.25	16.34
High	5230	17.50	17.36	20.44

8.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-5.15	-1.48	-2.94

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-5.15	-1.48	-0.11

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-2.94	-0.11	24.00	11.00
High	5230	-2.94	-0.11	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.41	13.25	16.34	24.00	-7.66
High	5230	17.50	17.36	20.44	24.00	-3.56



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.41	-0.67	2.47	11.00	-8.53
High	5230	3.70	3.36	6.54	11.00	-4.46

PSD, CHAIN 0

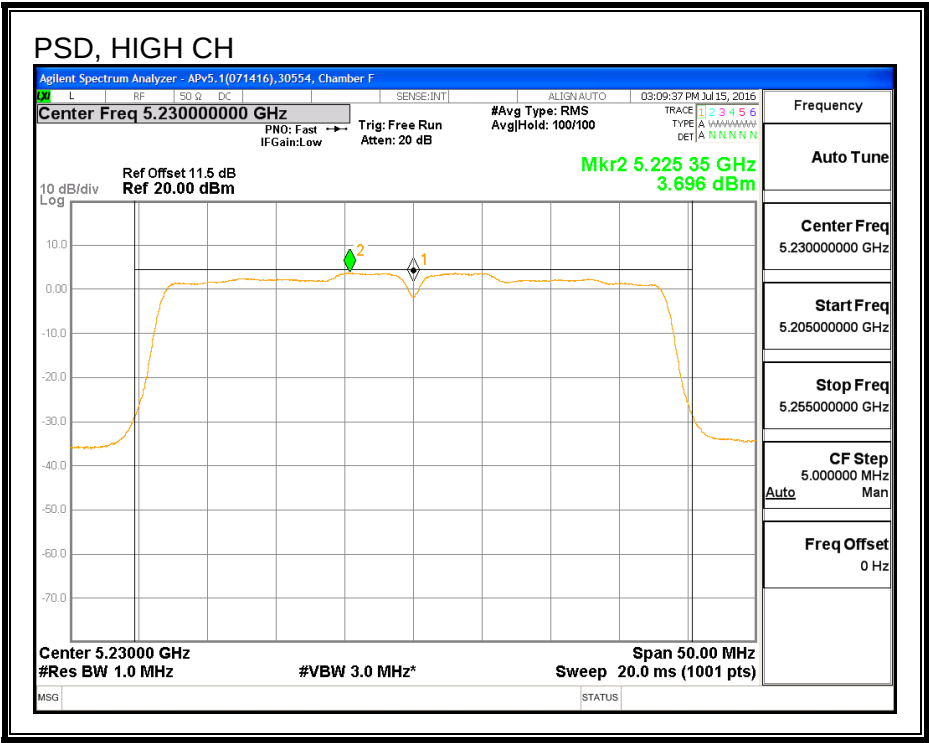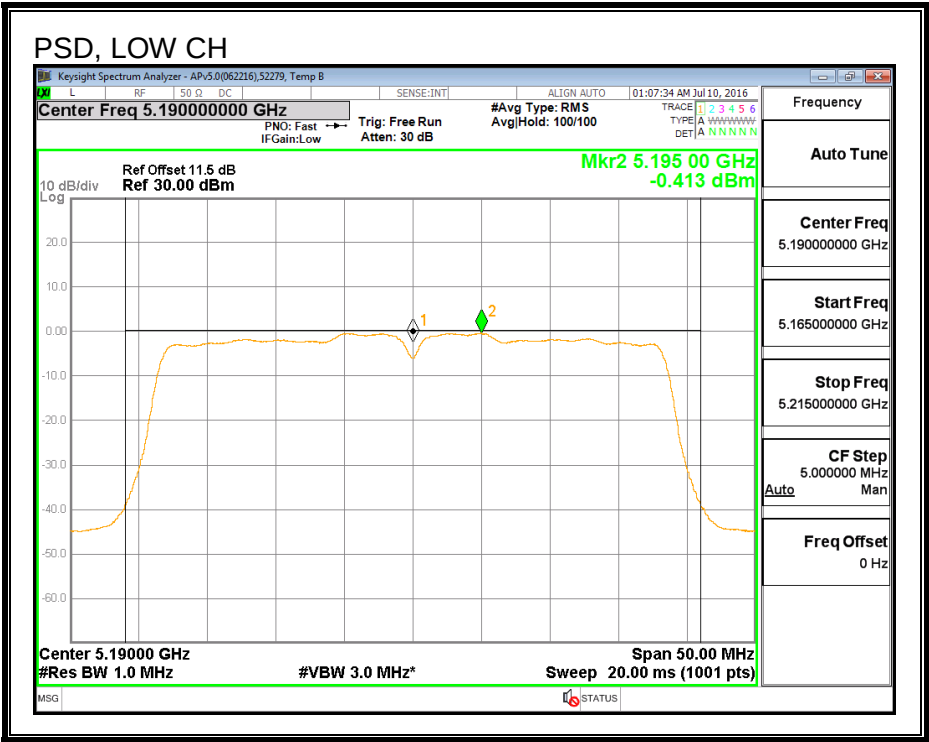

PSD, CHAIN 1

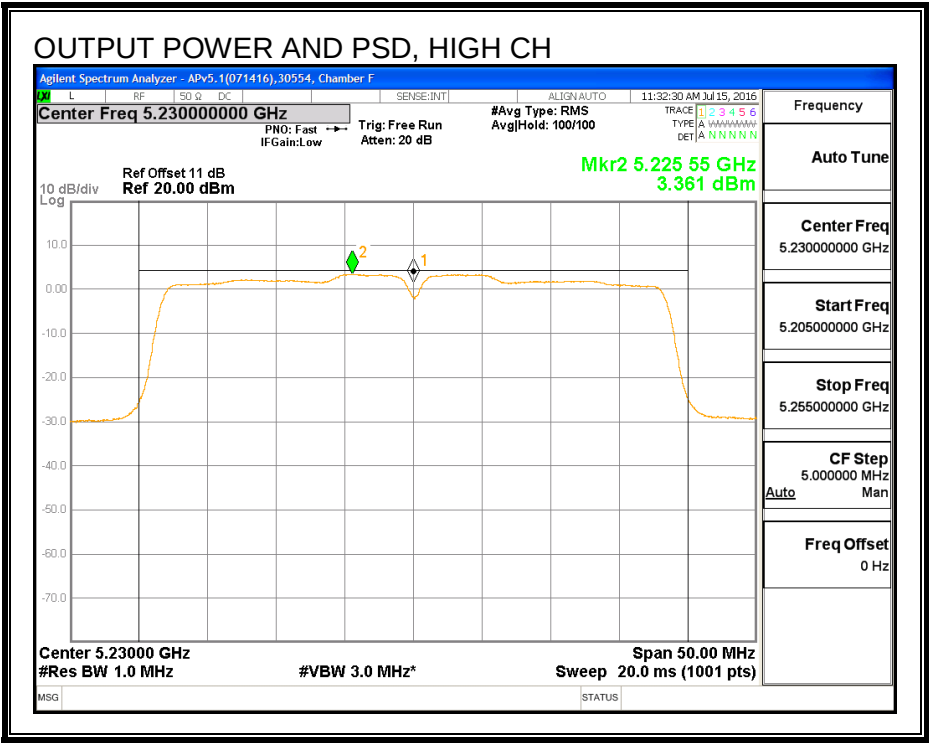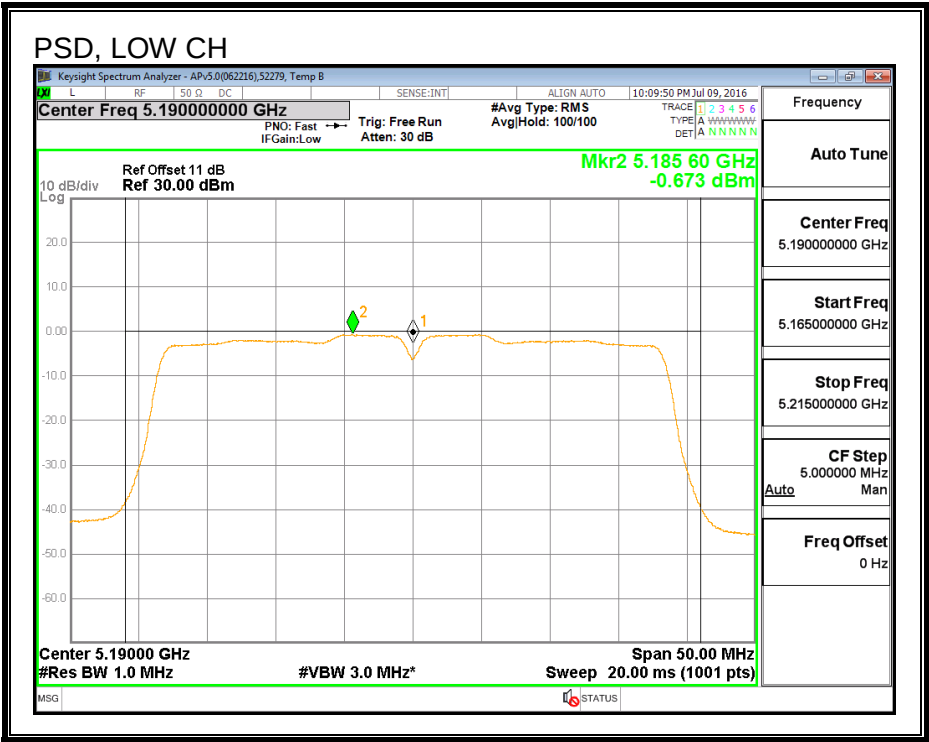

8.7. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.7.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.460

26 dB BANDWIDTH

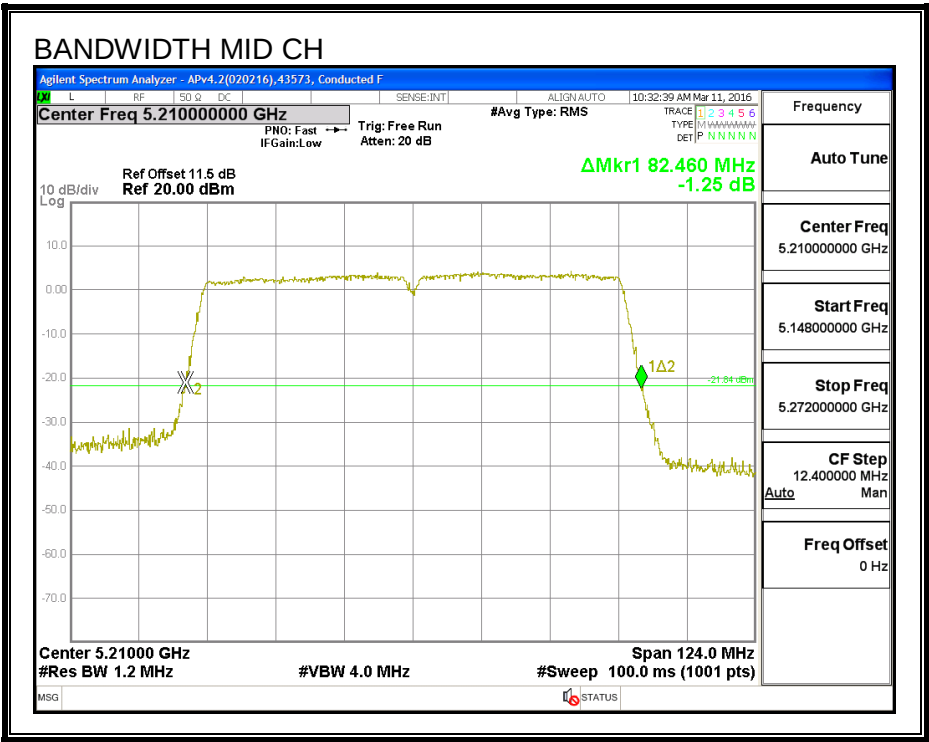

8.7.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.935

99% BANDWIDTH

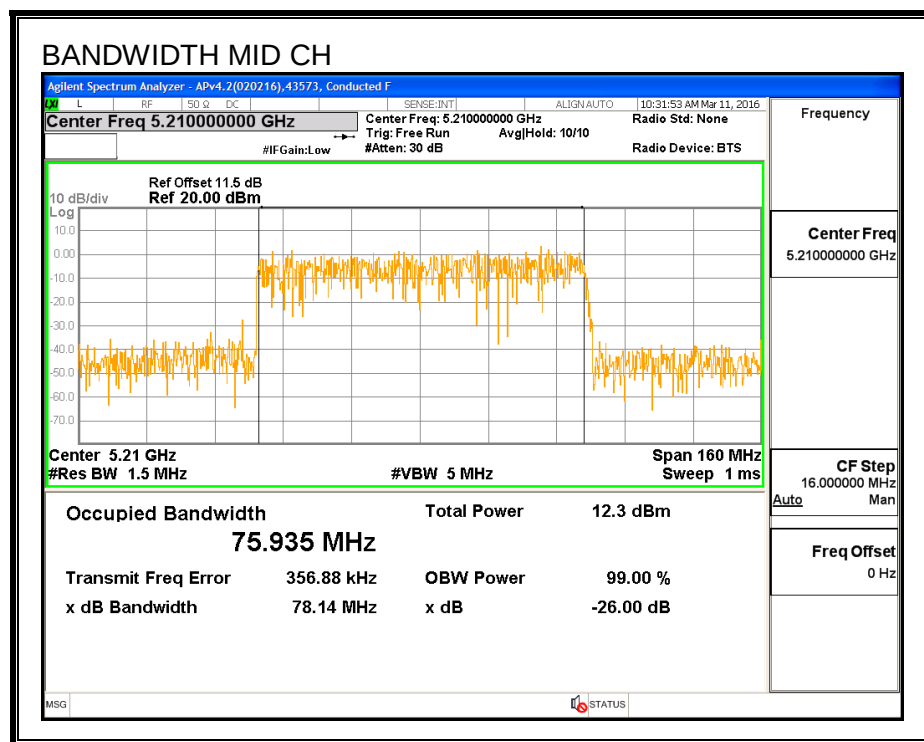

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	14.92

8.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-5.15	-5.15	24.00	11.00

Duty Cycle CF (dB)	0.15	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	14.92	14.92	24.00	-9.08

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-2.04	-1.89	11.00	-12.89

8.8. 802.11ac VHT80 CHAIN 1 MODE IN THE 5.2 GHz BAND

8.8.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.460

26 dB BANDWIDTH

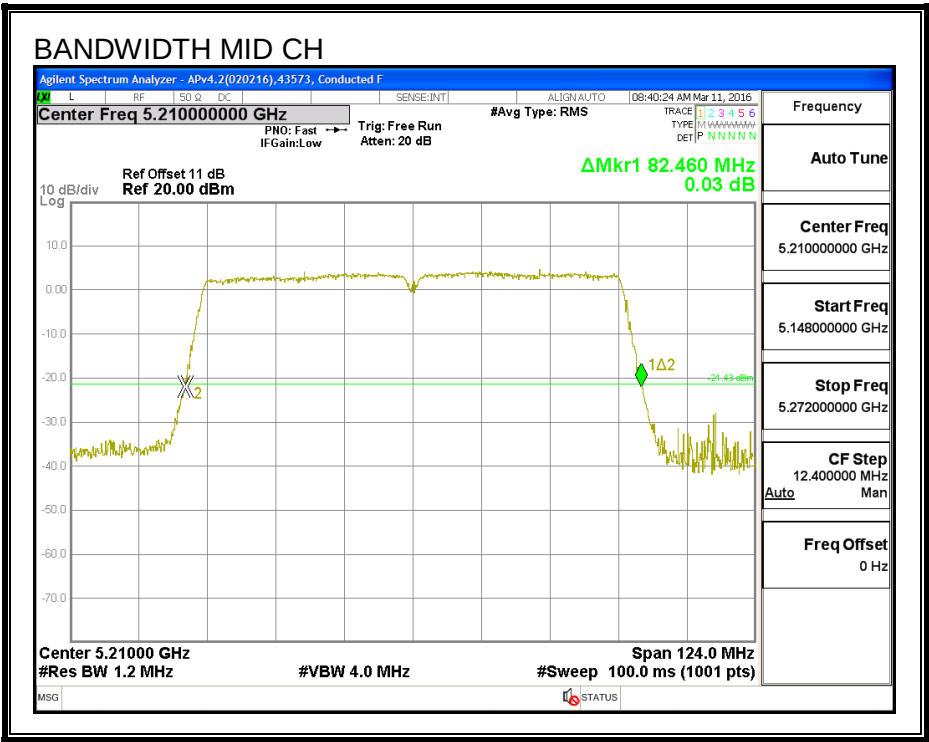

8.8.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.806

99% BANDWIDTH

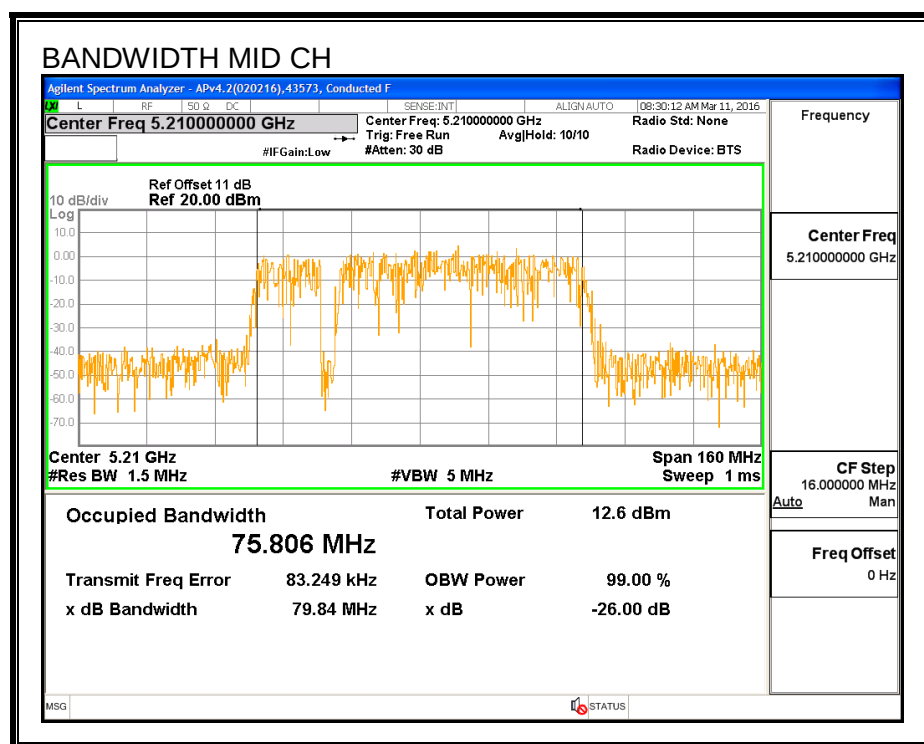

8.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	14.82

8.8.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-1.48	-1.48	24.00	11.00

Duty Cycle CF (dB)	0.15	Included in Calculations of Corr'd PSD
---------------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	14.82	14.82	24.00	-9.19

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-2.23	-2.08	11.00	-13.08

PSD

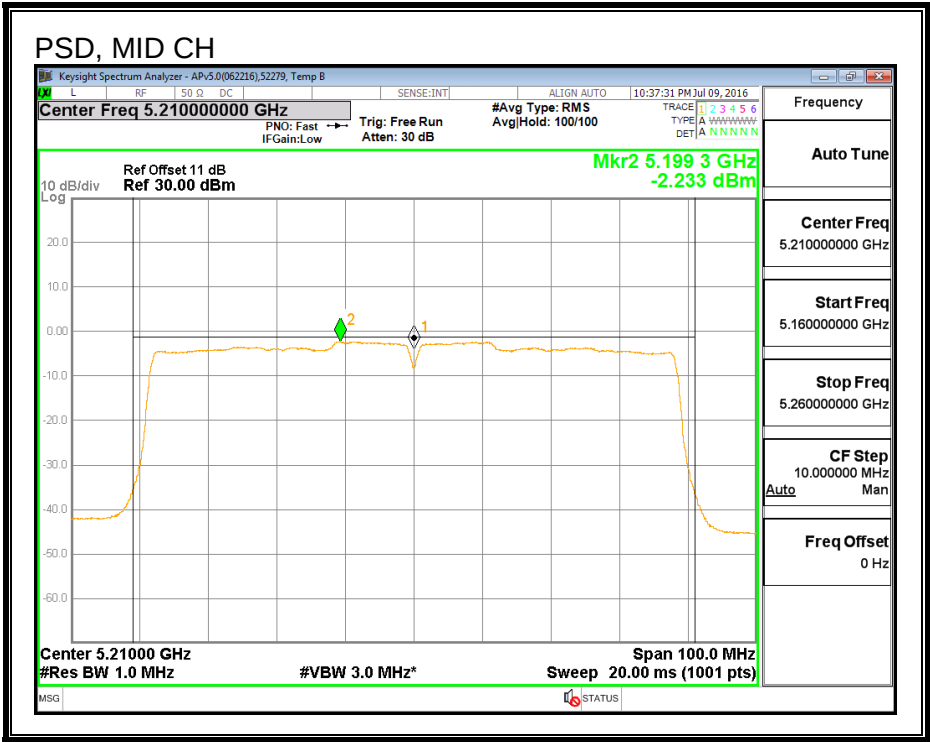

8.9. 802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND

8.9.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Mid	5210	83.00	82.088

26 DB BANDWIDTH, CHAIN 0

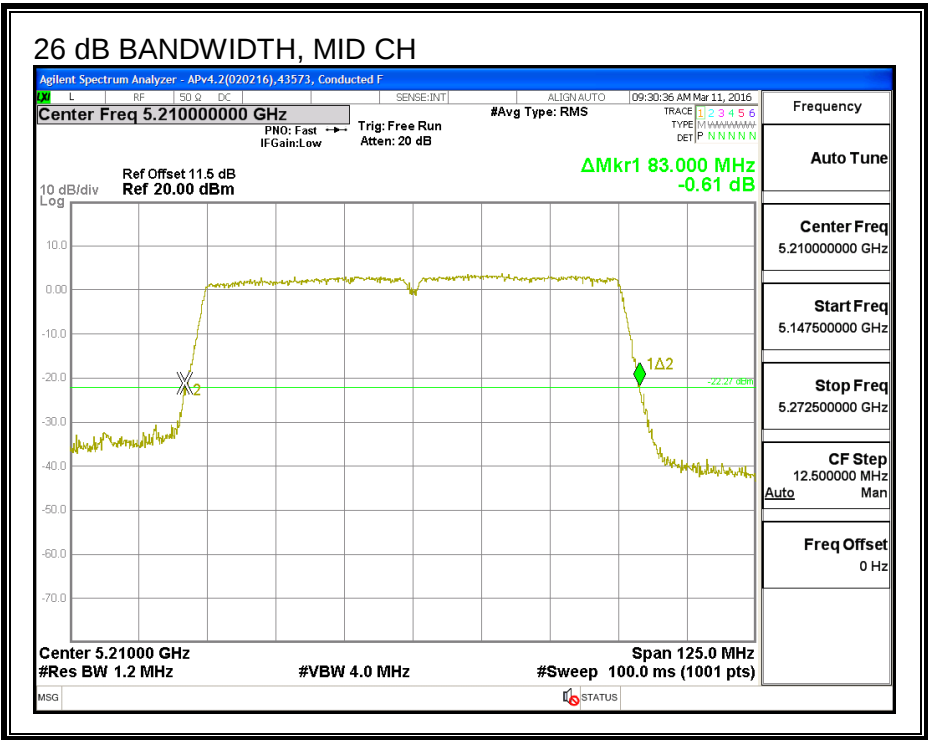

26 DB BANDWIDTH, CHAIN 1

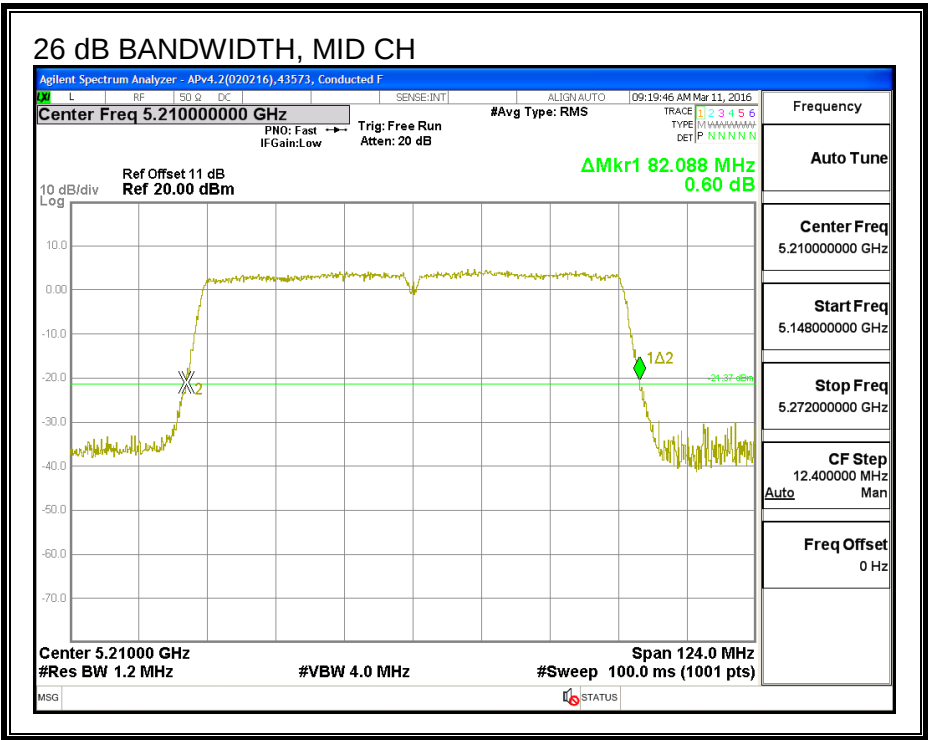

8.9.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Mid	5210	75.895	72.495

99% BANDWIDTH, CHAIN 0

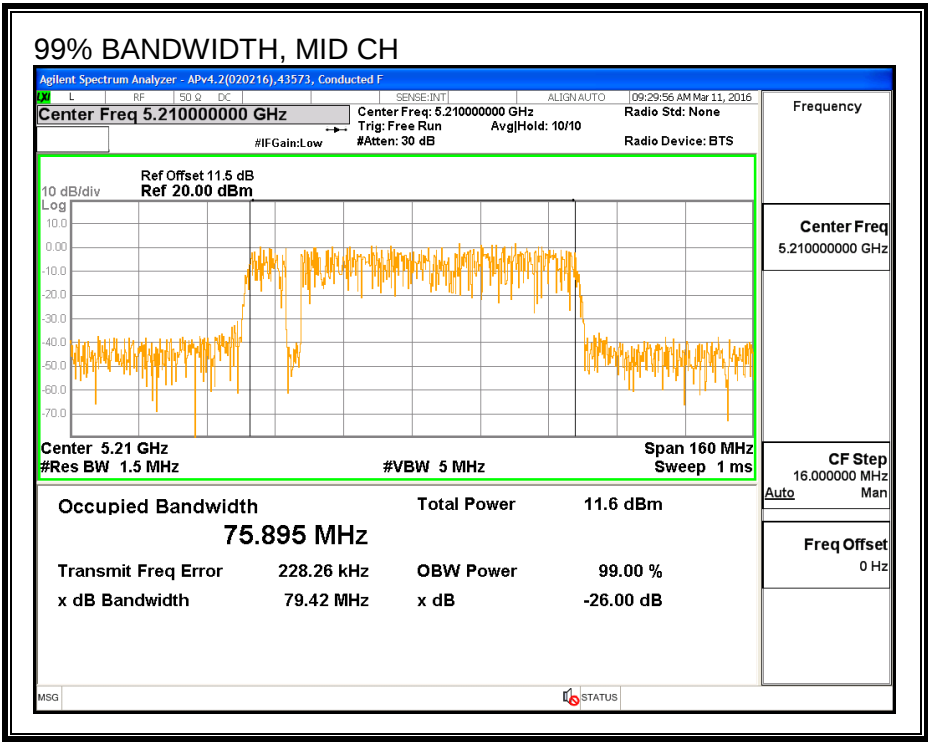

99% BANDWIDTH, CHAIN 1

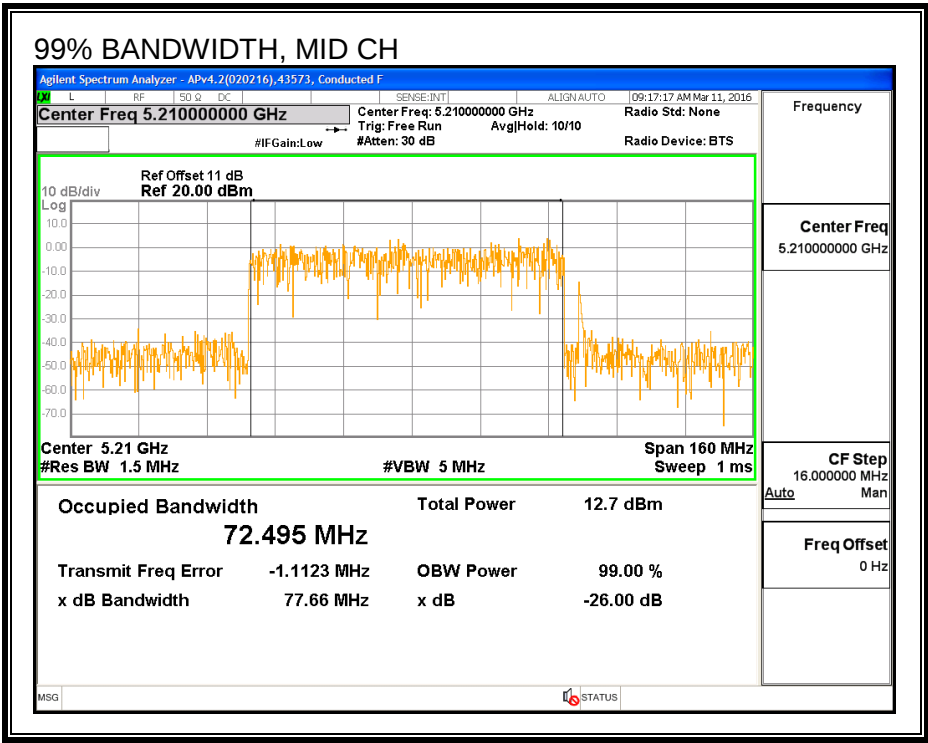

8.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	12.90	12.81	15.87

8.9.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-5.15	-1.48	-2.94

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-5.15	-1.48	-0.11

RESULTS

ID:	39004	Date:	7/27/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-2.94	-0.11	24.00	11.00

Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
---------------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	12.90	12.81	15.87	24.00	-8.13


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-4.02	-4.38	-1.00	11.00	-12.00

PSD, CHAIN 0

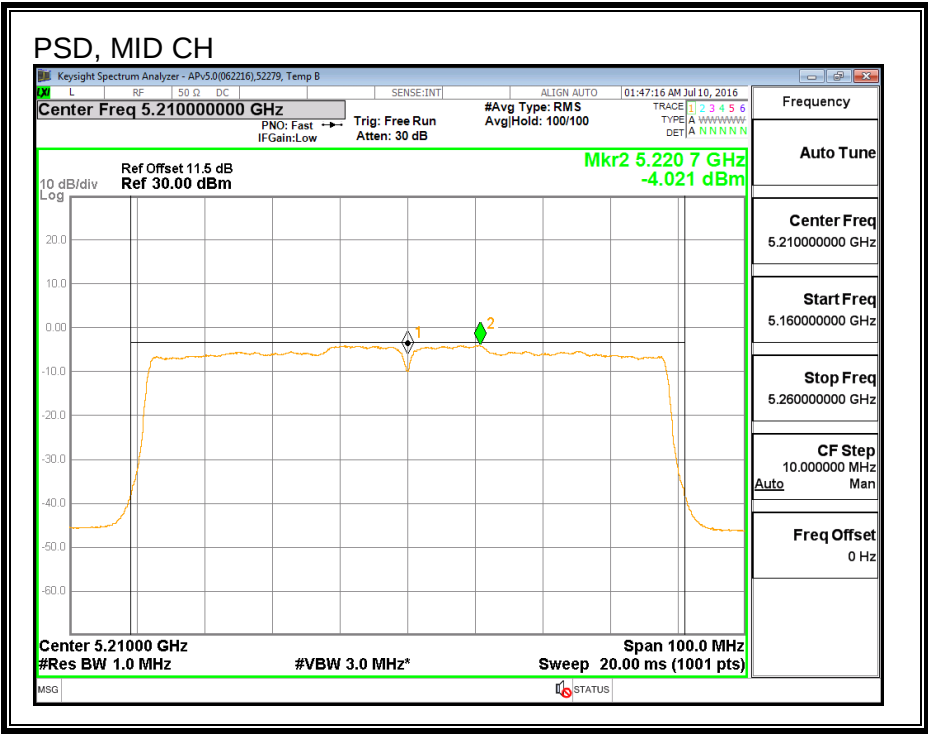

PSD, CHAIN 1

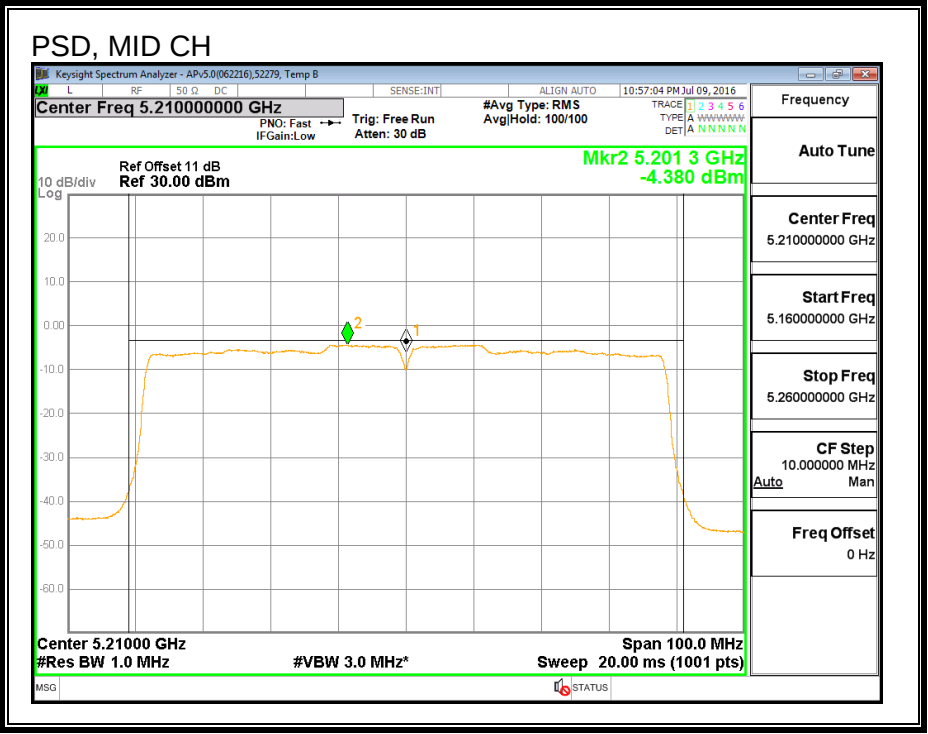

8.10. 802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND

8.10.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	34.650
Mid	5280	32.750
Mid	5300	36.000
High	5320	22.168

26 dB BANDWIDTH

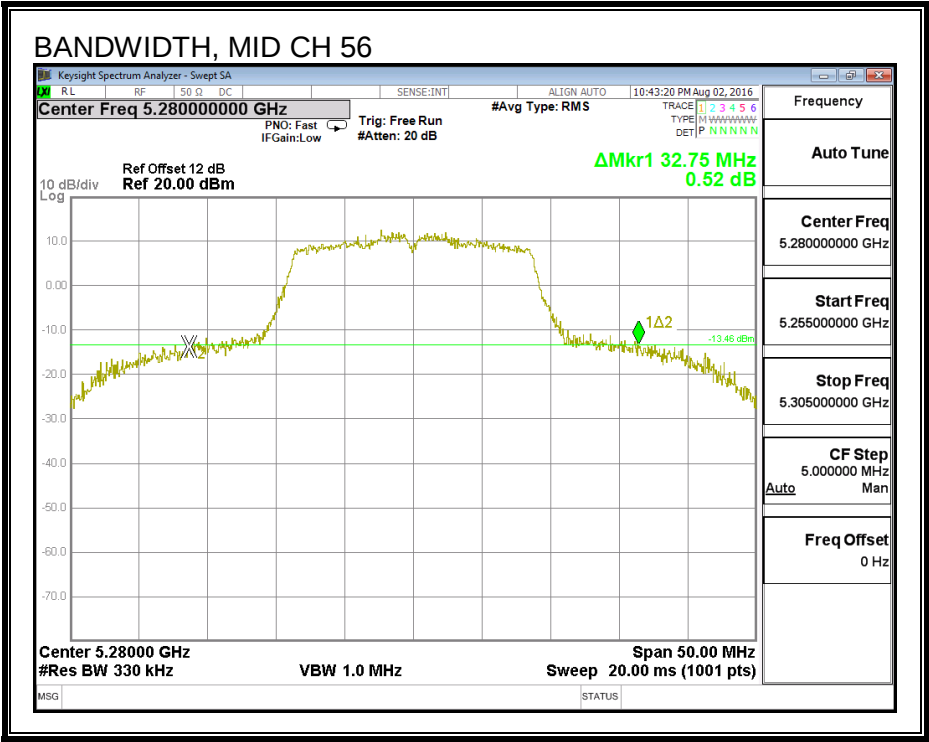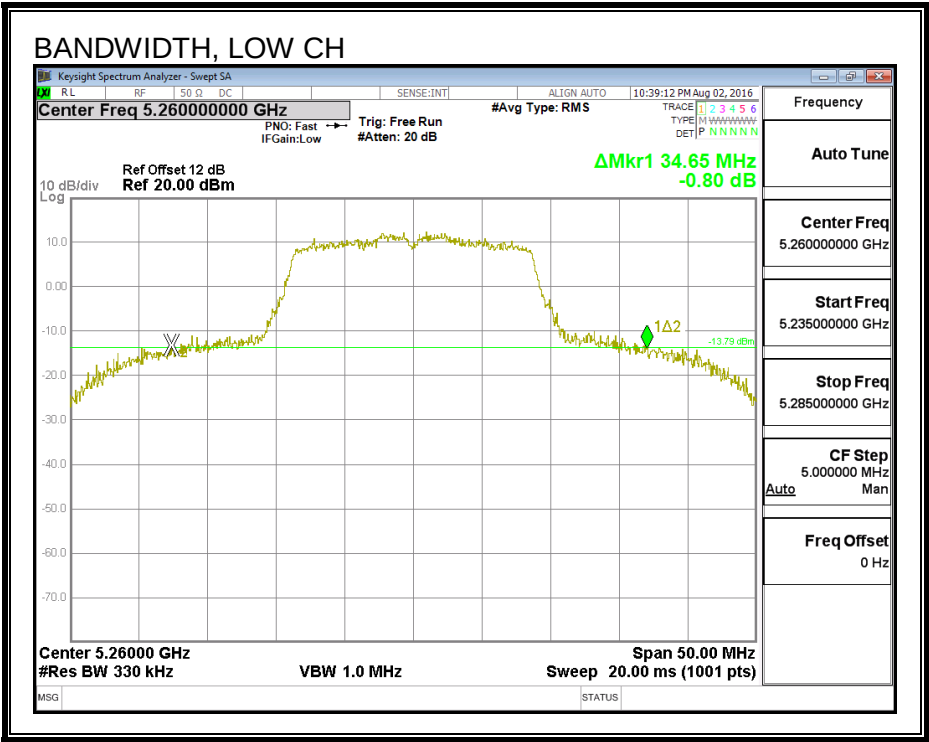

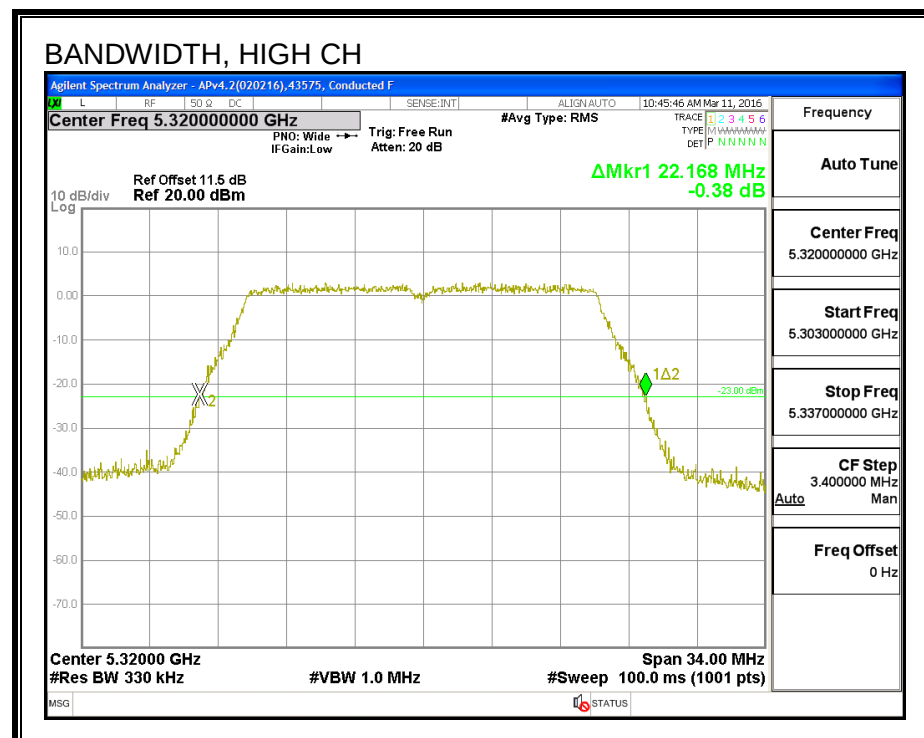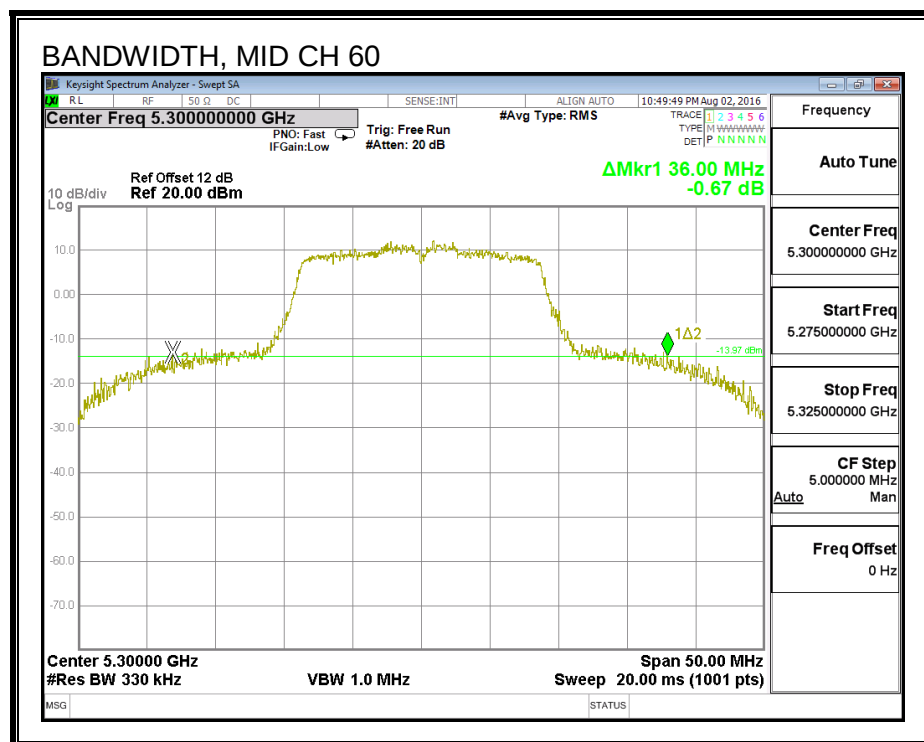

8.10.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	18.078
Mid	5280	18.057
Mid	5300	18.155
High	5320	17.741

99% BANDWIDTH

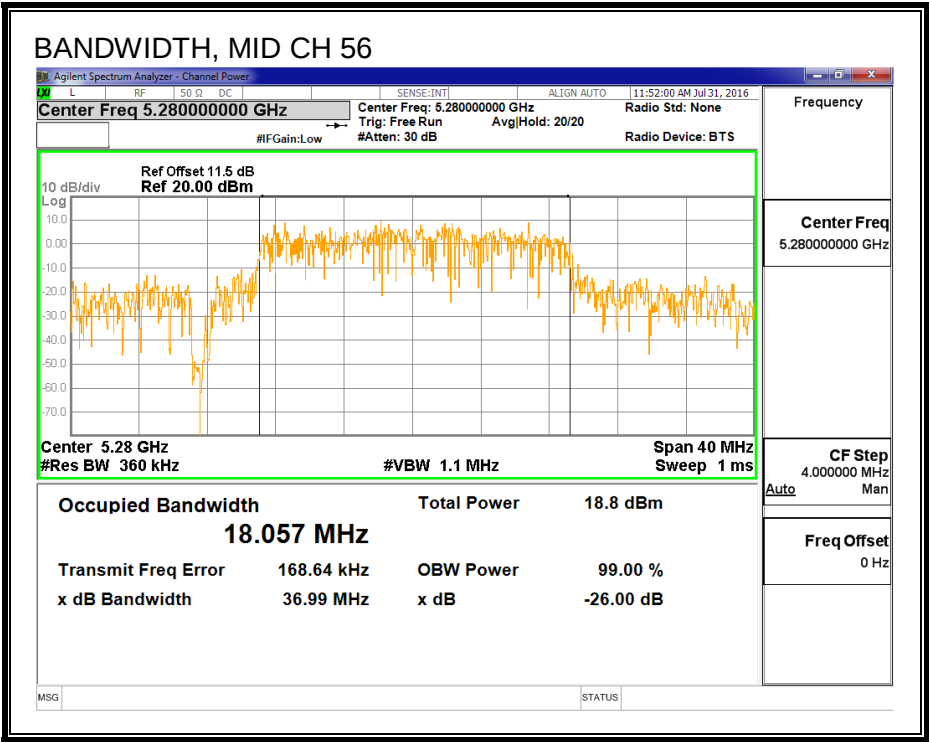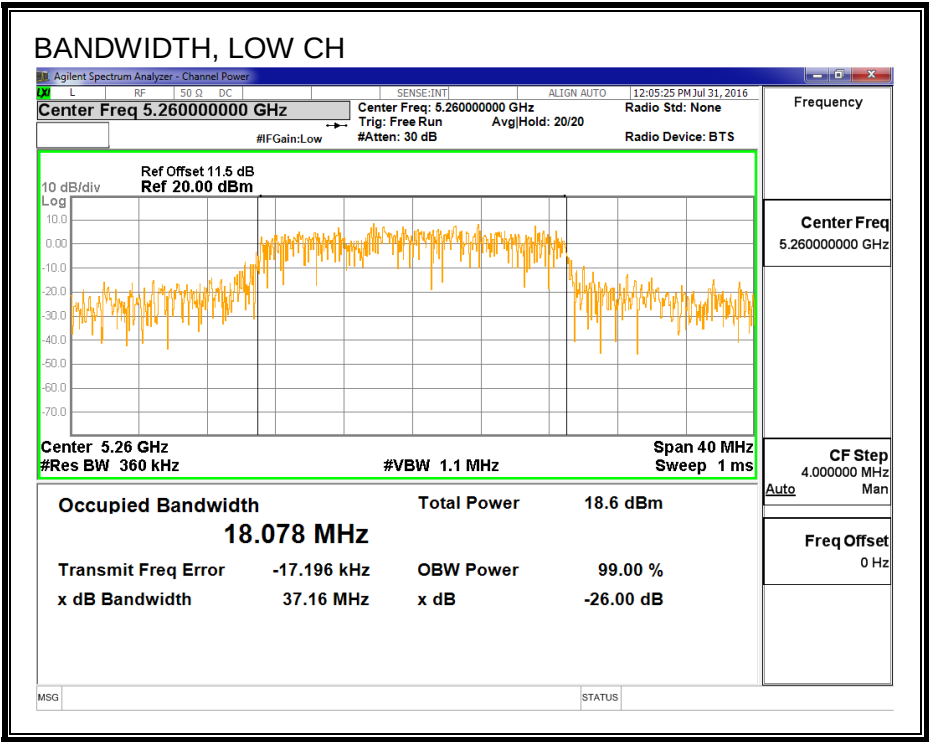

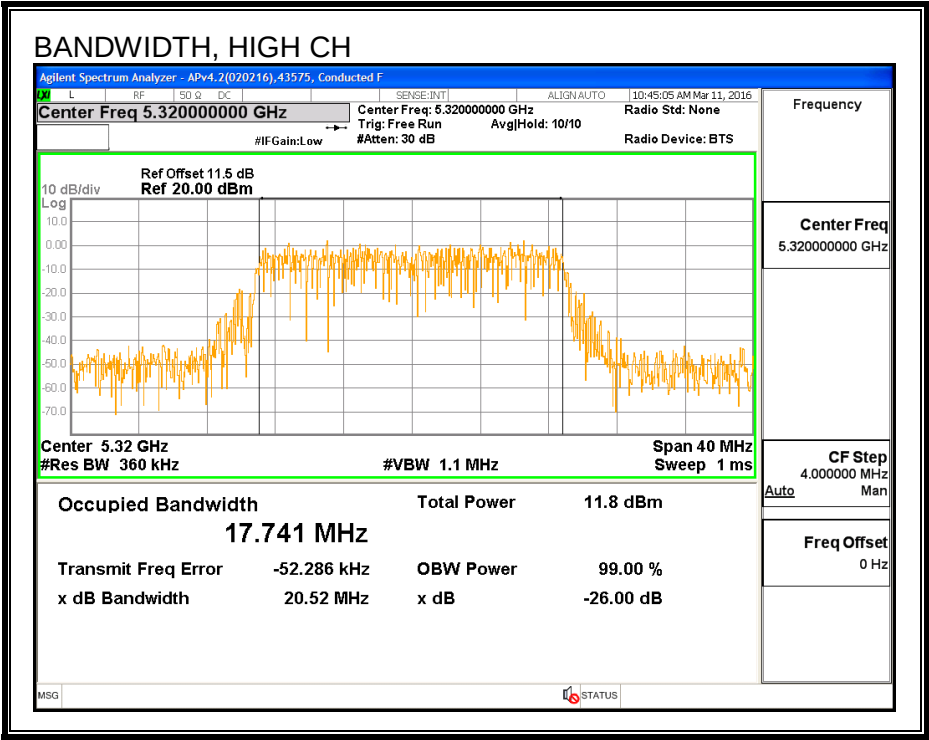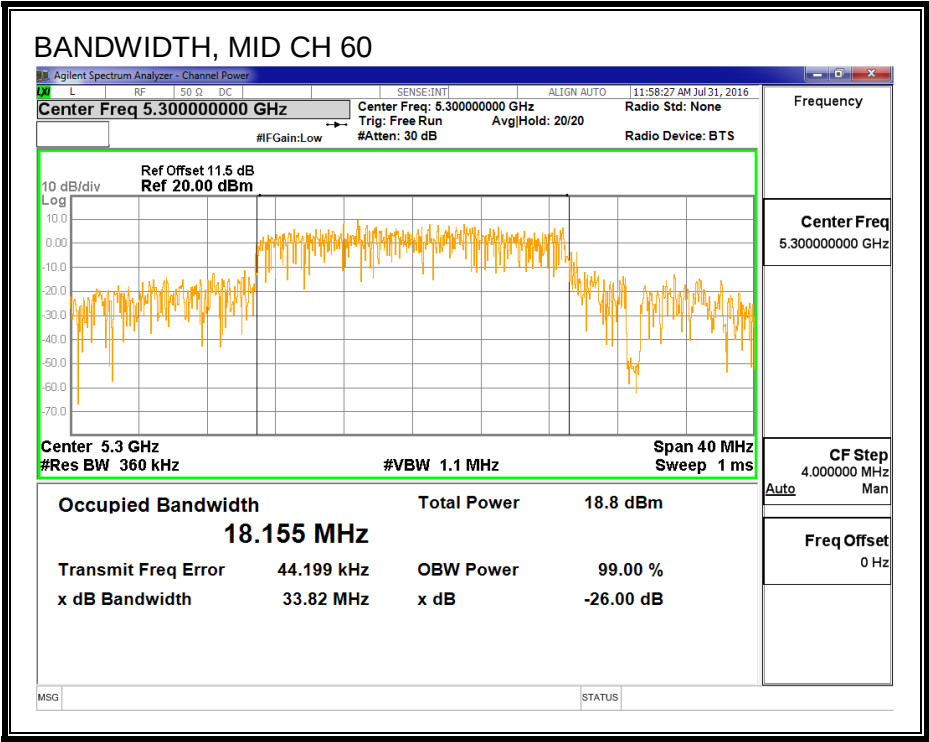

8.10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	44353	Date:	7/28/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	19.20
Mid	5280	19.30
Mid	5300	19.00
High	5320	16.35

8.10.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	44366	Date:	7/28/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	34.65	18.078	-3.75	23.57	11.00
Mid	5280	32.75	18.057	-3.75	23.57	11.00
Mid	5300	36.00	18.155	-3.75	23.59	11.00
High	5320	22.17	17.741	-3.75	23.49	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	19.20	19.20	23.57	-4.37
Mid	5280	19.30	19.30	23.59	-4.29
Mid	5300	19.00	19.00	23.59	-4.59
High	5320	16.35	16.35	23.49	-7.14

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	8.40	8.40	11.00	-2.60
Mid	5280	10.01	10.01	11.00	-0.99
Mid	5300	10.23	10.23	11.00	-0.77
High	5320	5.47	5.47	11.00	-5.53

PSD

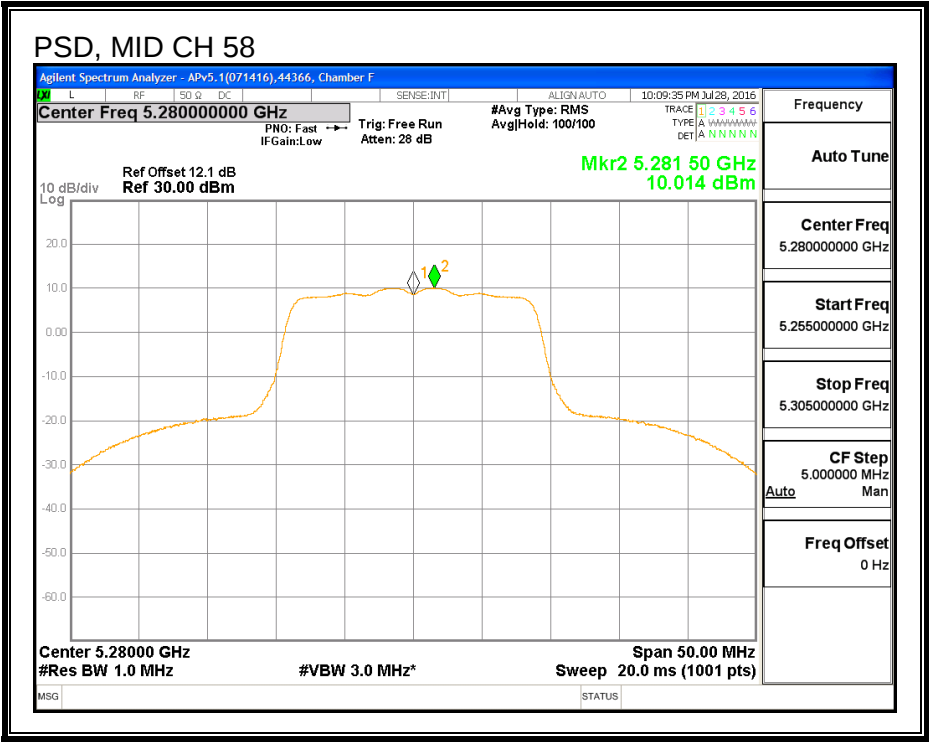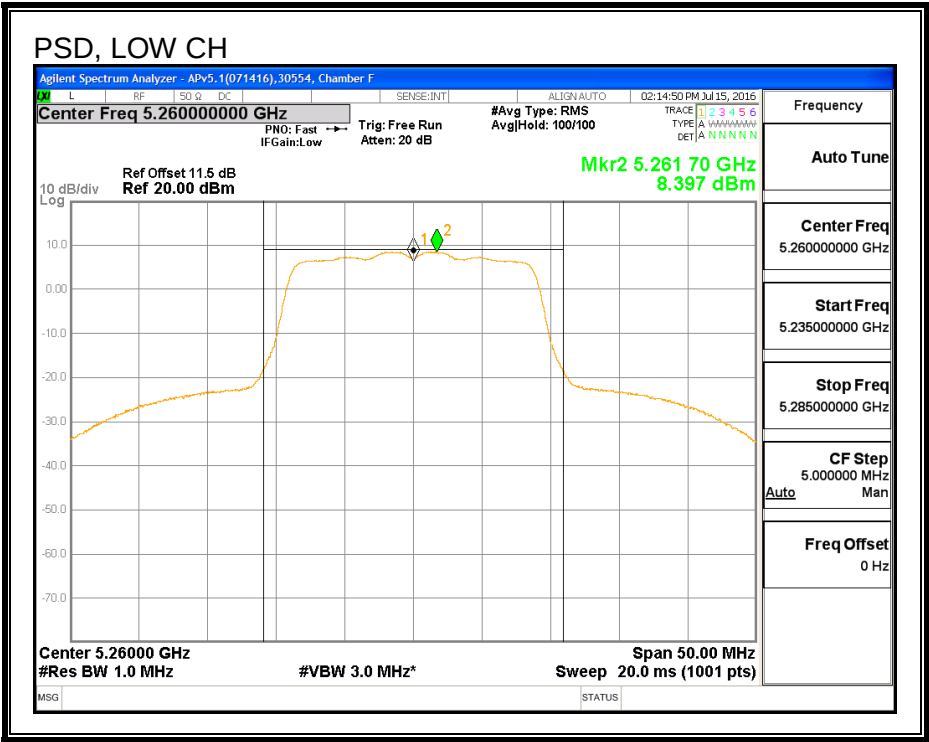

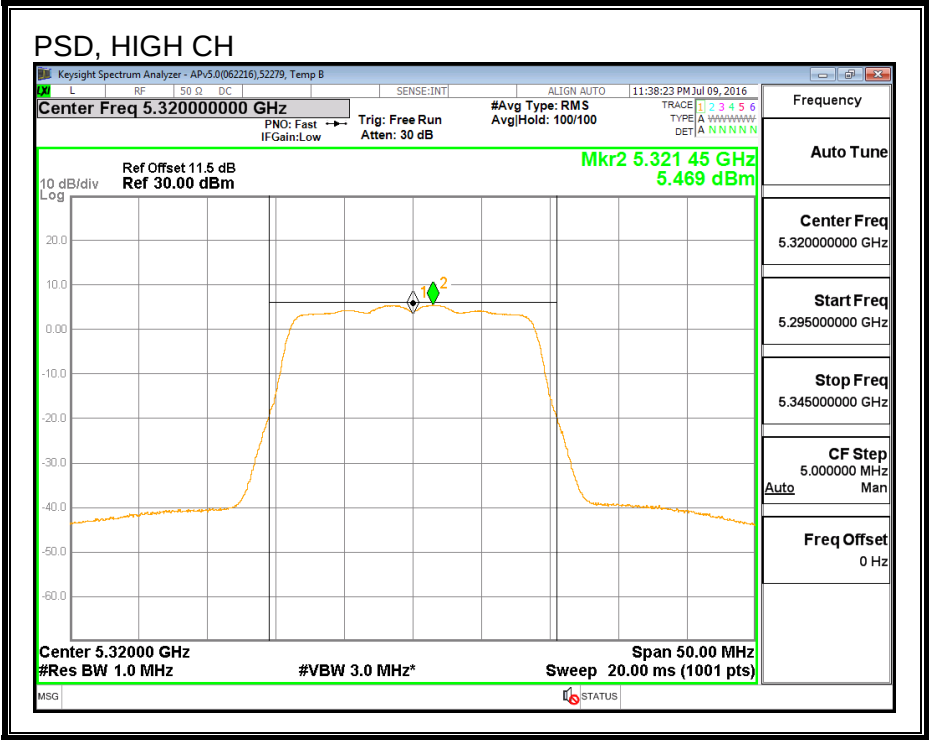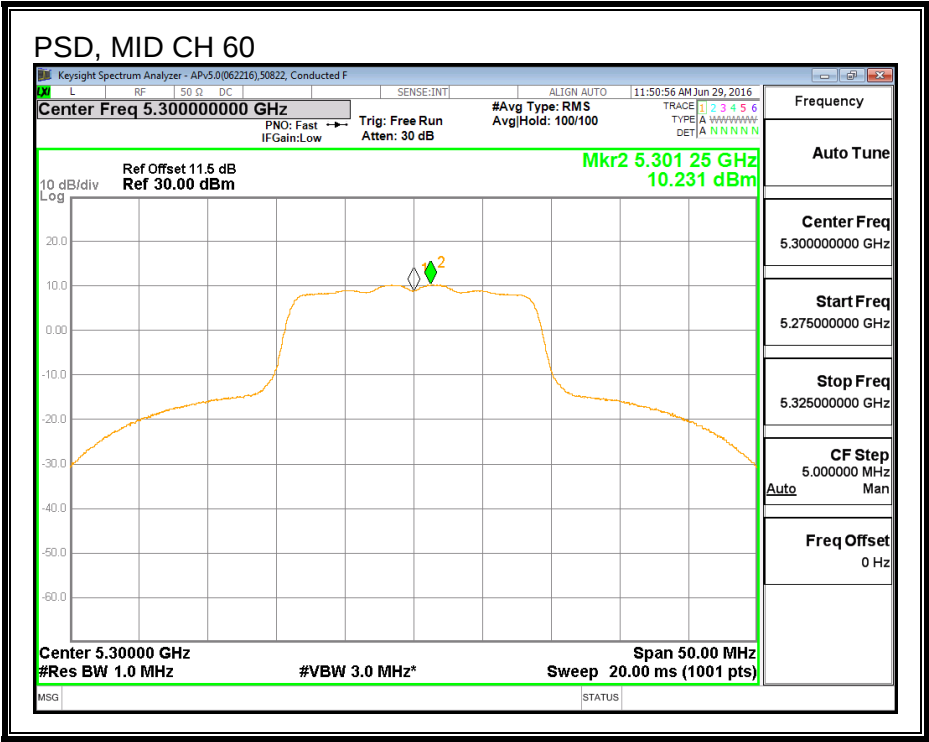

8.11. 802.11n HT20 CHAIN 1 MODE IN THE 5.3 GHz BAND

8.11.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	34.15
Mid	5280	31.35
Mid	5300	36.00
High	5320	21.81

26 dB BANDWIDTH

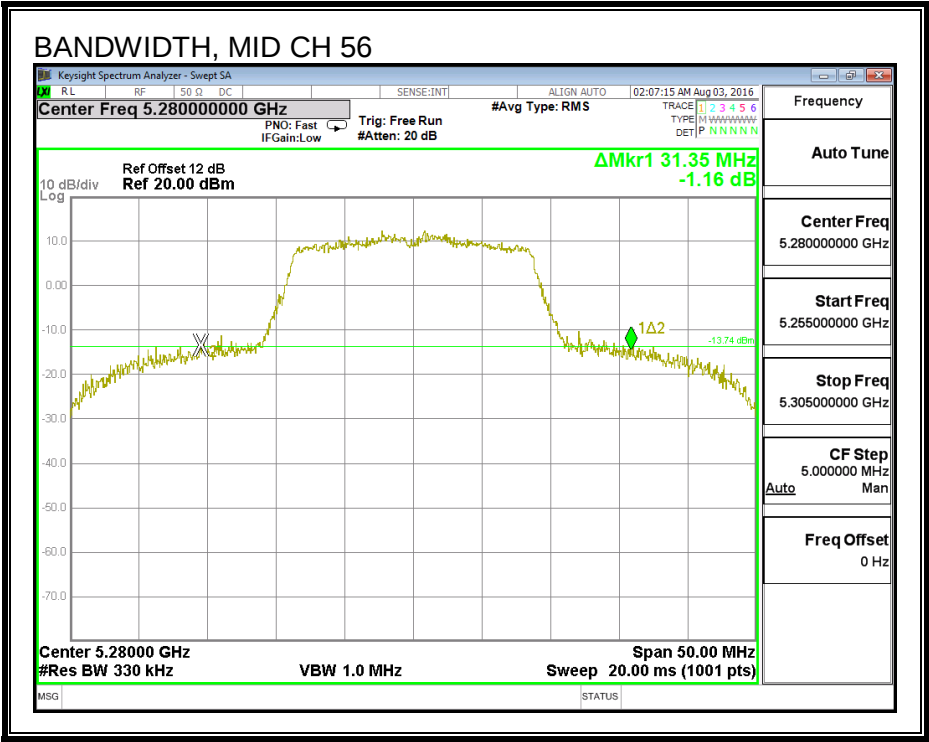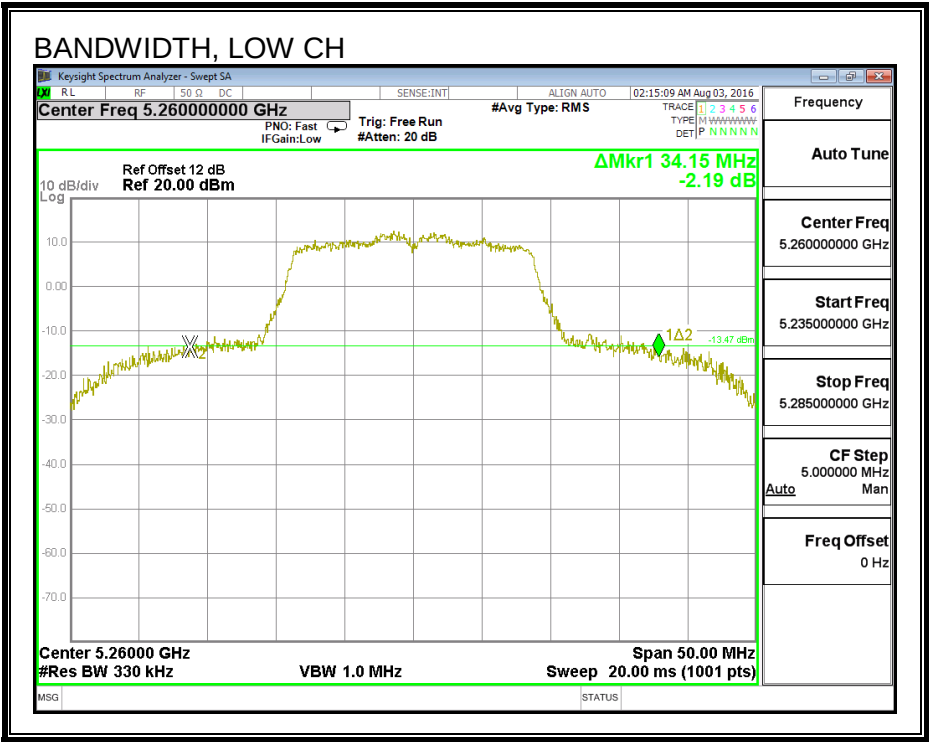

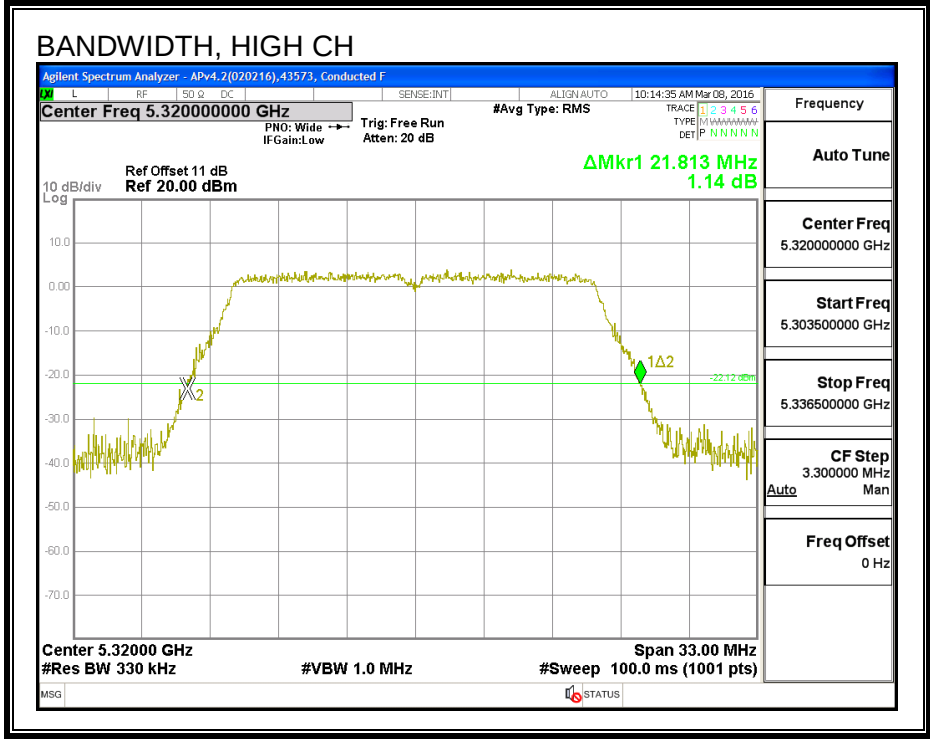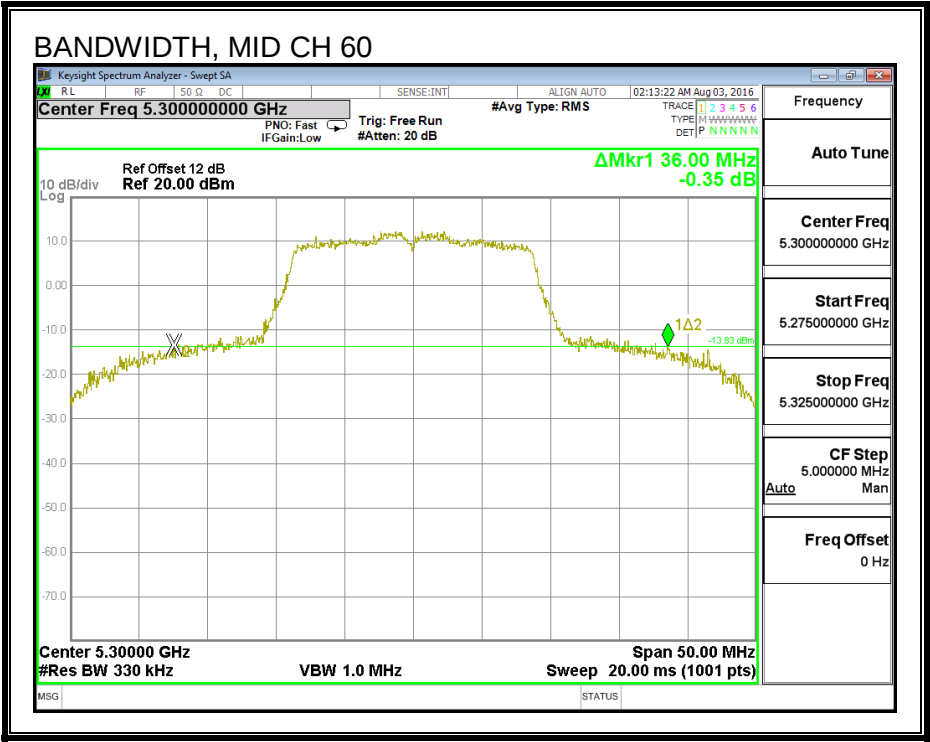

8.11.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	18.028
Mid	5280	18.194
Mid	5300	18.086
High	5320	17.759

99% BANDWIDTH

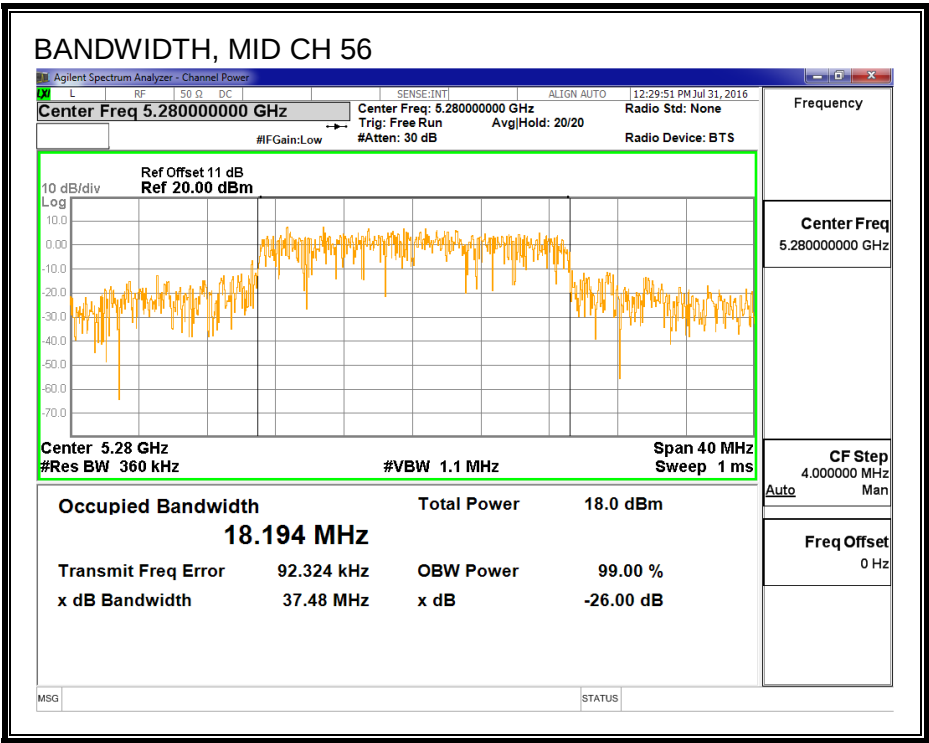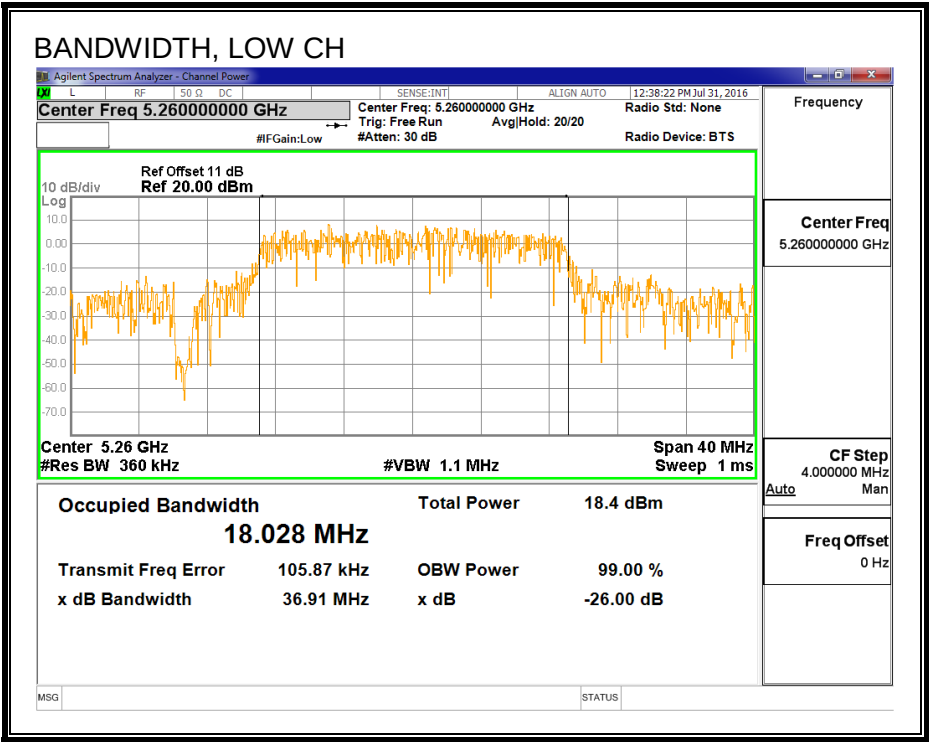

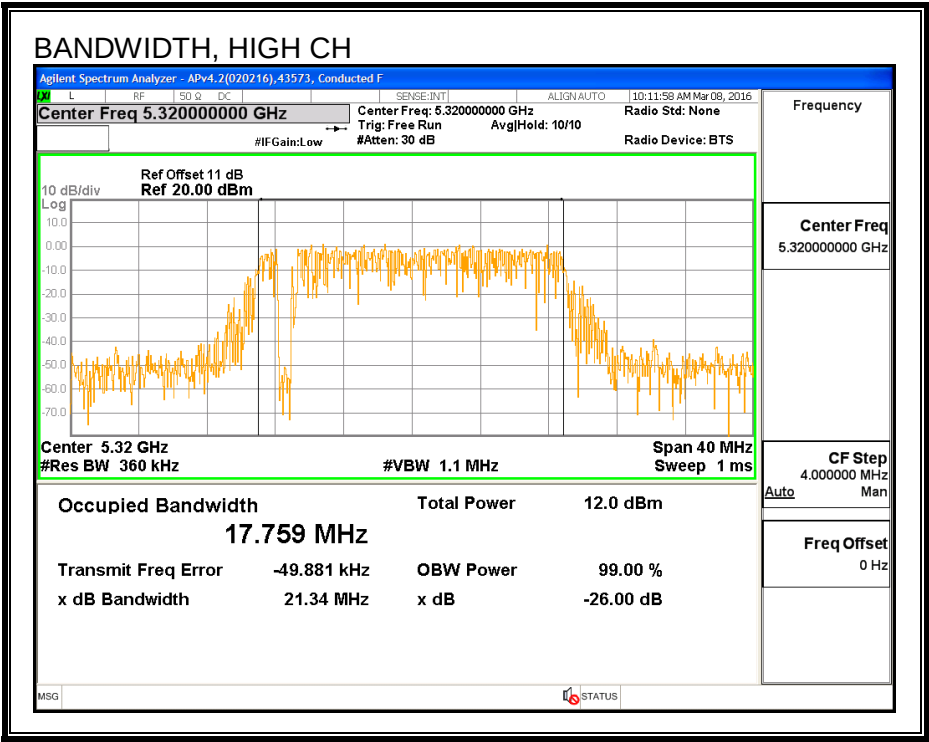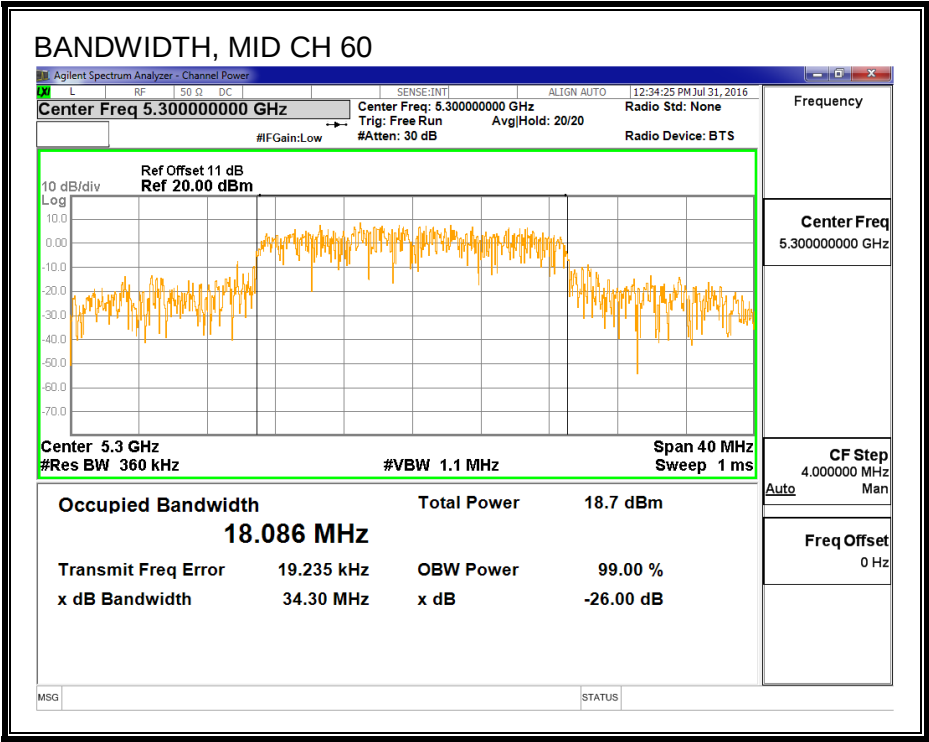

8.11.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	44366	Date:	7/28/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	19.46
Mid	5280	20.05
Mid	5300	19.00
High	5320	16.39

8.11.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	44366	Date:	7/28/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	34.15	18.028	-1.38	23.56	11.00
Mid	5280	31.35	18.194	-1.38	23.60	11.00
Mid	5300	36.00	18.086	-1.38	23.57	11.00
High	5320	21.81	17.759	-1.38	23.49	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	19.46	19.46	23.56	-4.10
Mid	5280	20.05	20.05	23.60	-3.55
Mid	5300	19.00	19.00	23.57	-4.57
High	5320	16.39	16.39	23.49	-7.11

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	9.92	9.92	11.00	-1.09
Mid	5280	9.37	9.37	11.00	-1.63
Mid	5300	9.94	9.94	11.00	-1.06
High	5320	5.31	5.31	11.00	-5.69

