



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-45.43	-20	Pass
BLE 1M	2440	-46.54	-20	Pass
BLE 1M	2480	-46.25	-20	Pass
BLE 2M	2402	-46.55	-20	Pass
BLE 2M	2440	-46.95	-20	Pass
BLE 2M	2480	-44.57	-20	Pass


6.2 Test Graphs


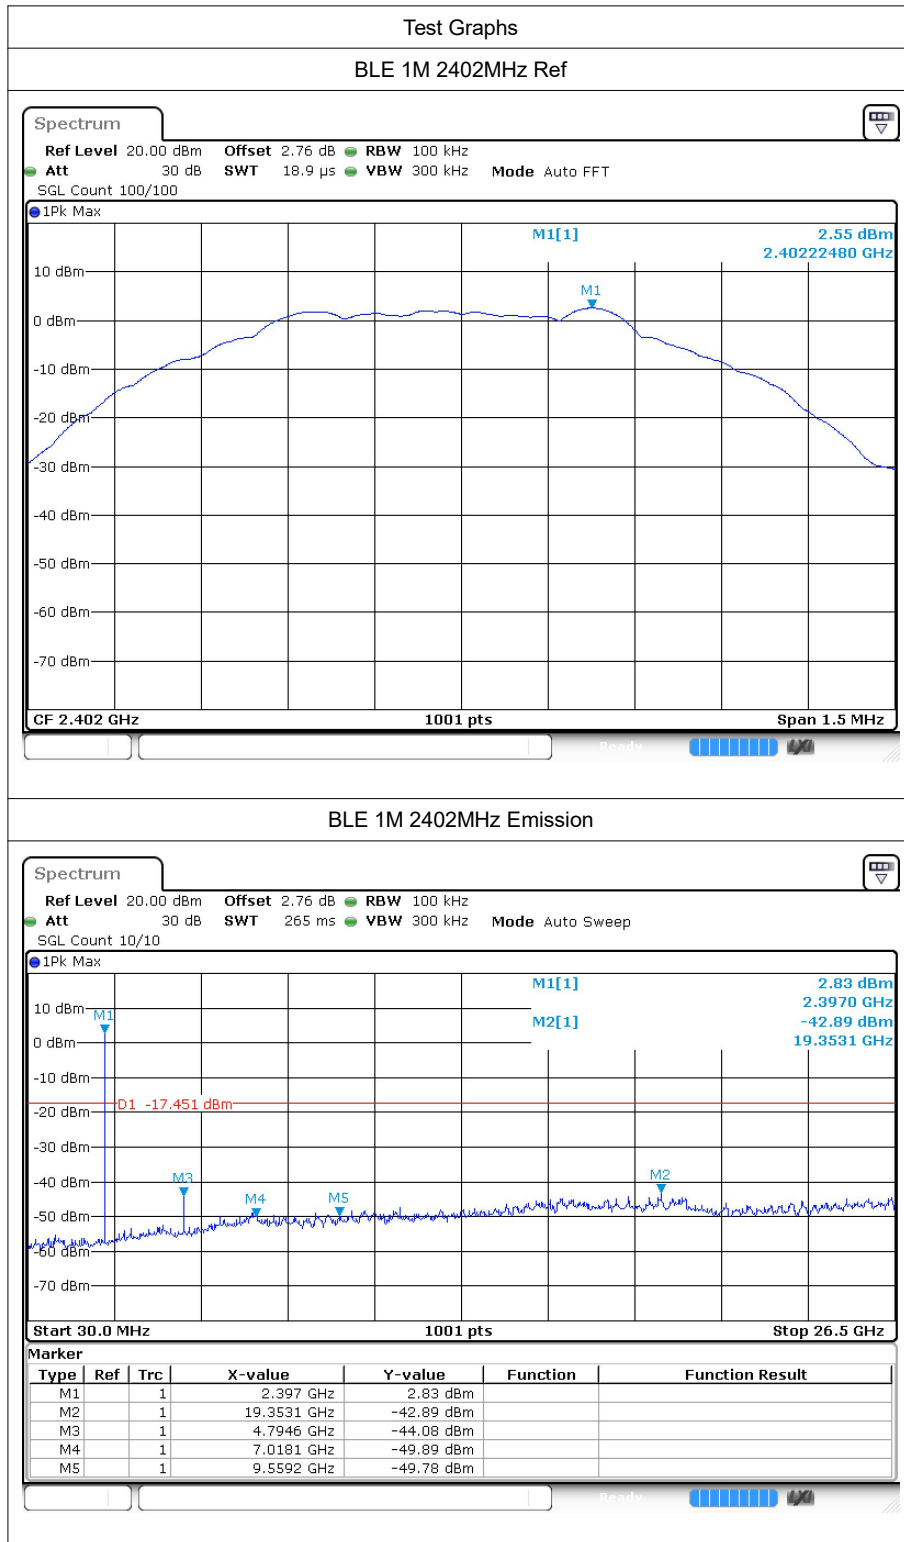


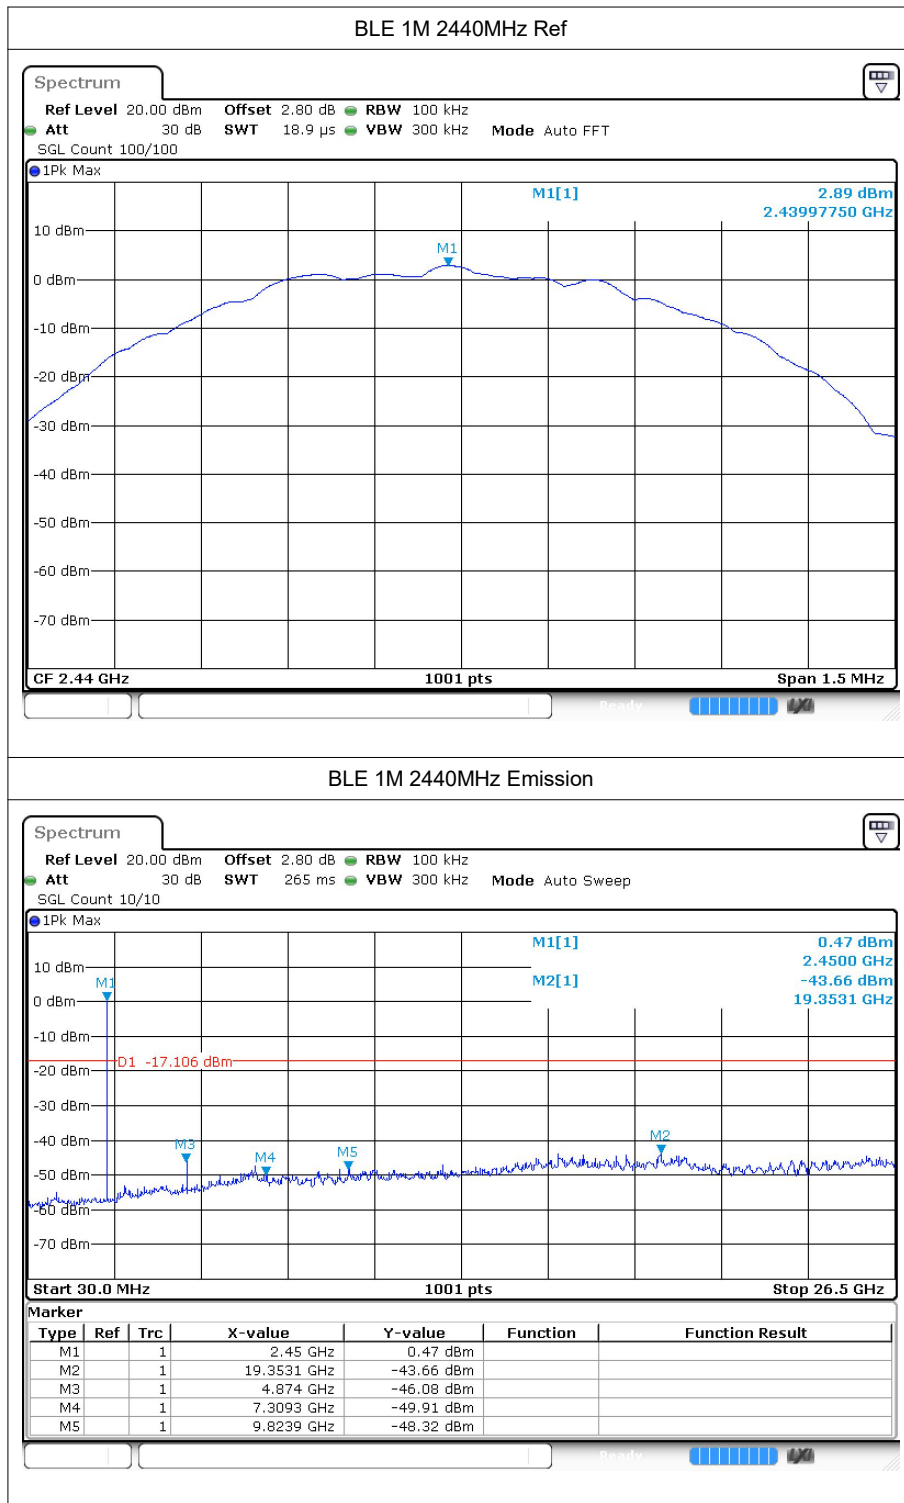

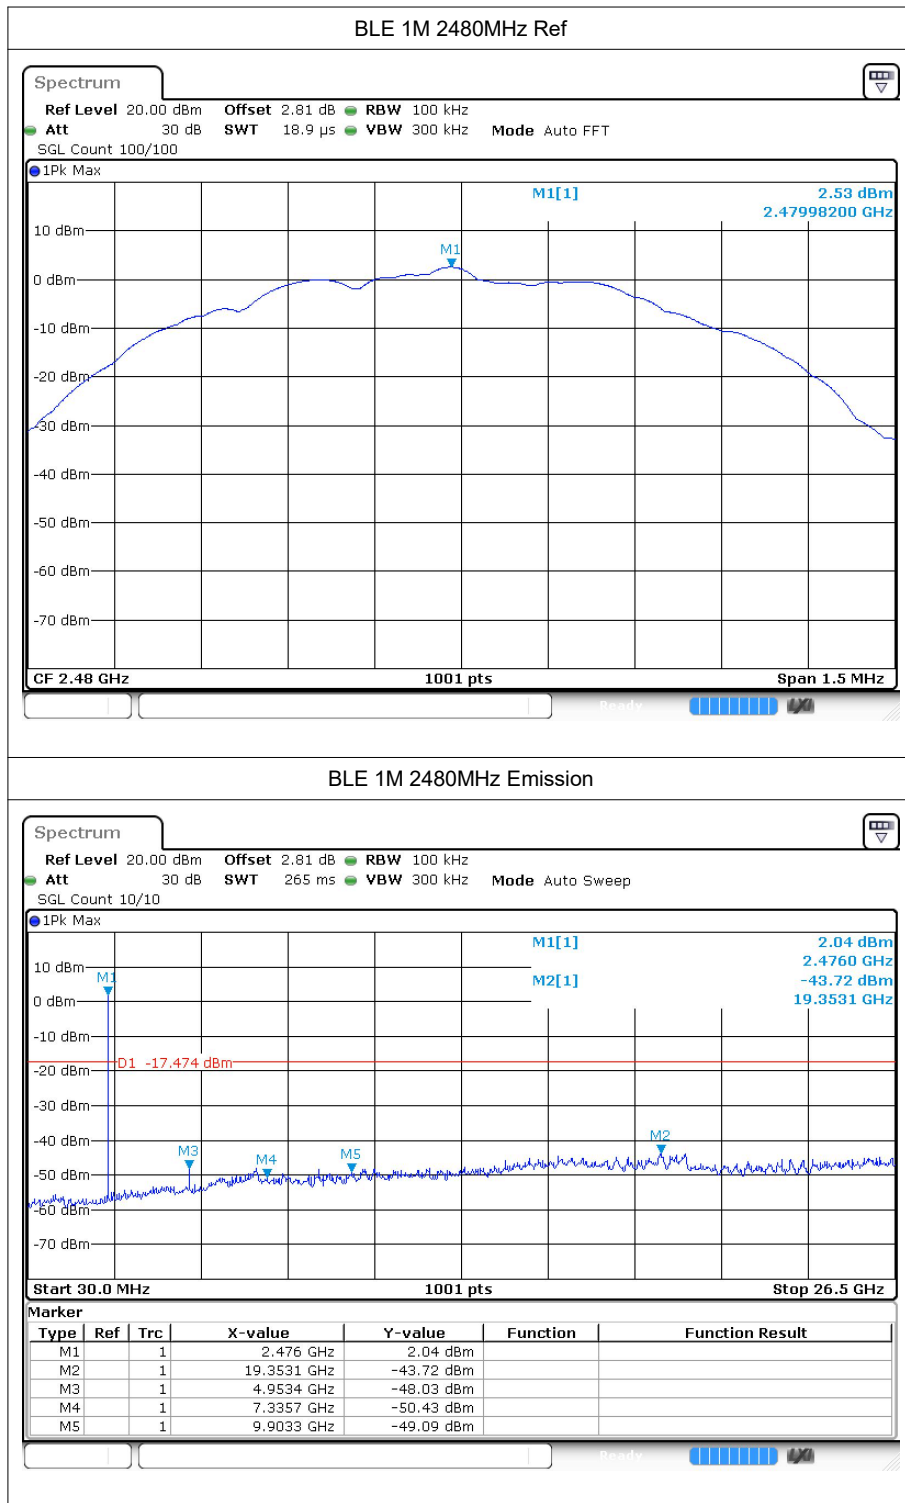

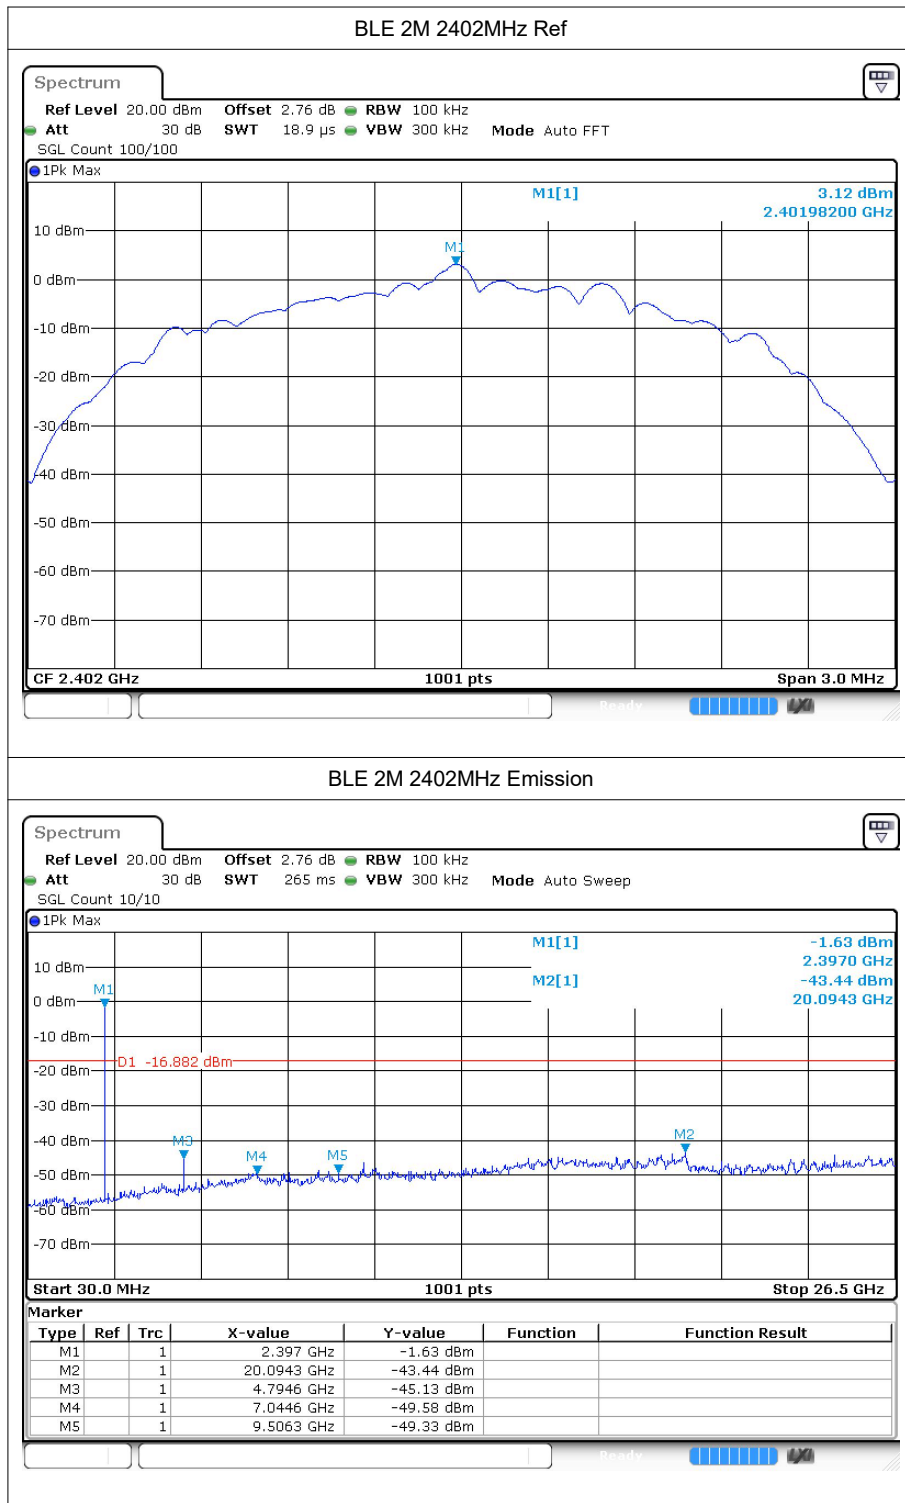

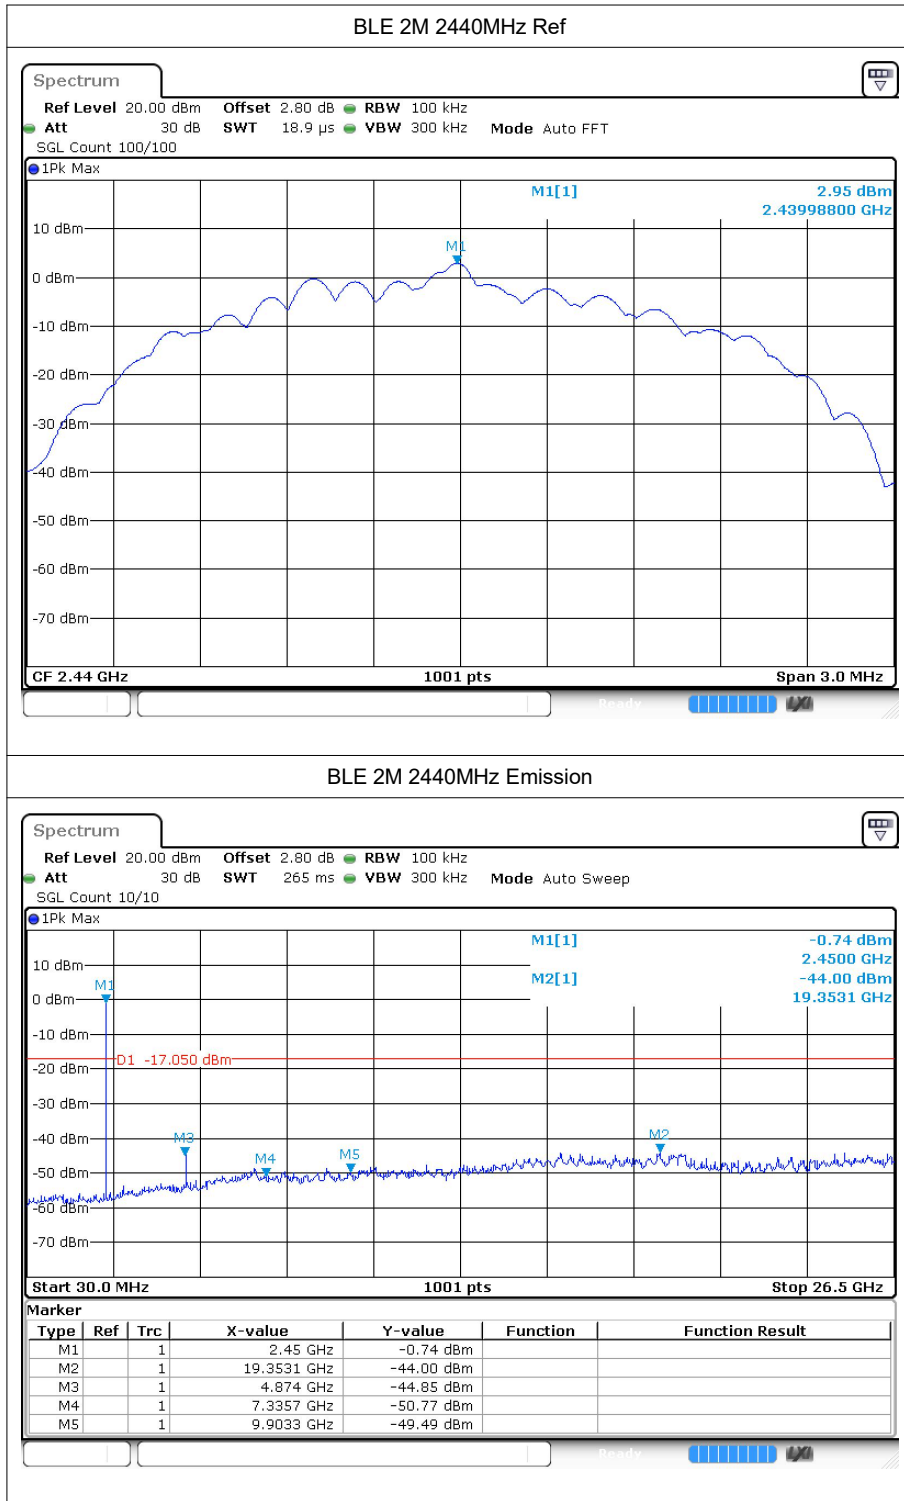

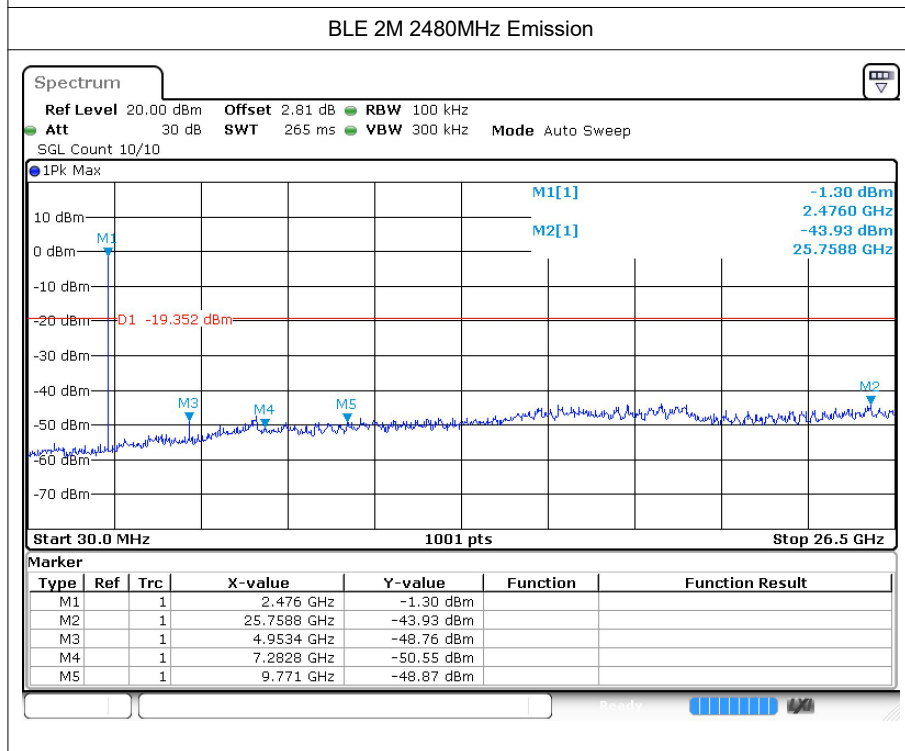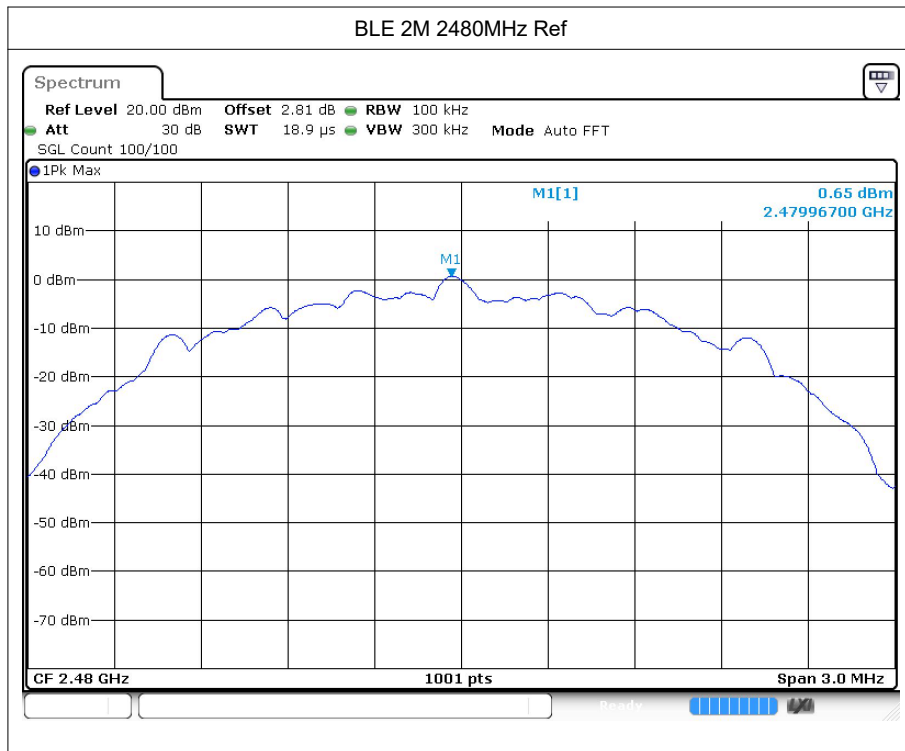






7 Restrict Band



7.1 Test Result



Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-47.58	2	49.68	Peak	74	Pass
BLE 1M	2402	2310	-57.17	2	40.09	Average	54	Pass
BLE 1M	2402	2348.016	-45.98	2	51.28	Peak	74	Pass
BLE 1M	2402	2339.376	-54.99	2	42.27	Average	54	Pass
BLE 1M	2402	2390	-48.17	2	49.09	Peak	74	Pass
BLE 1M	2402	2390	-56.45	2	40.81	Average	54	Pass
BLE 1M	2480	2483.5	-49.41	2	47.85	Peak	74	Pass
BLE 1M	2480	2483.5	-55.82	2	41.44	Average	54	Pass
BLE 1M	2480	2496.496	-46.87	2	50.39	Peak	74	Pass
BLE 1M	2480	2483.752	-55.77	2	41.49	Average	54	Pass
BLE 1M	2480	2500	-48.01	2	49.25	Peak	74	Pass
BLE 1M	2480	2500	-57.28	2	39.98	Average	54	Pass
BLE 2M	2402	2310	-46.18	2	51.08	Peak	74	Pass
BLE 2M	2402	2310	-56.67	2	40.59	Average	54	Pass
BLE 2M	2402	2343.6	-45	2	52.26	Peak	74	Pass
BLE 2M	2402	2338.224	-54.77	2	42.49	Average	54	Pass
BLE 2M	2402	2390	-48.75	2	48.51	Peak	74	Pass
BLE 2M	2402	2390	-56.58	2	40.68	Average	54	Pass
BLE 2M	2480	2483.5	-44.7	2	52.56	Peak	74	Pass
BLE 2M	2480	2483.5	-54.42	2	42.84	Average	54	Pass
BLE 2M	2480	2483.512	-44.7	2	52.56	Peak	74	Pass
BLE 2M	2480	2483.512	-54.42	2	42.84	Average	54	Pass
BLE 2M	2480	2500	-49.31	2	47.95	Peak	74	Pass
BLE 2M	2480	2500	-56.66	2	40.6	Average	54	Pass

7.2 Test Graphs

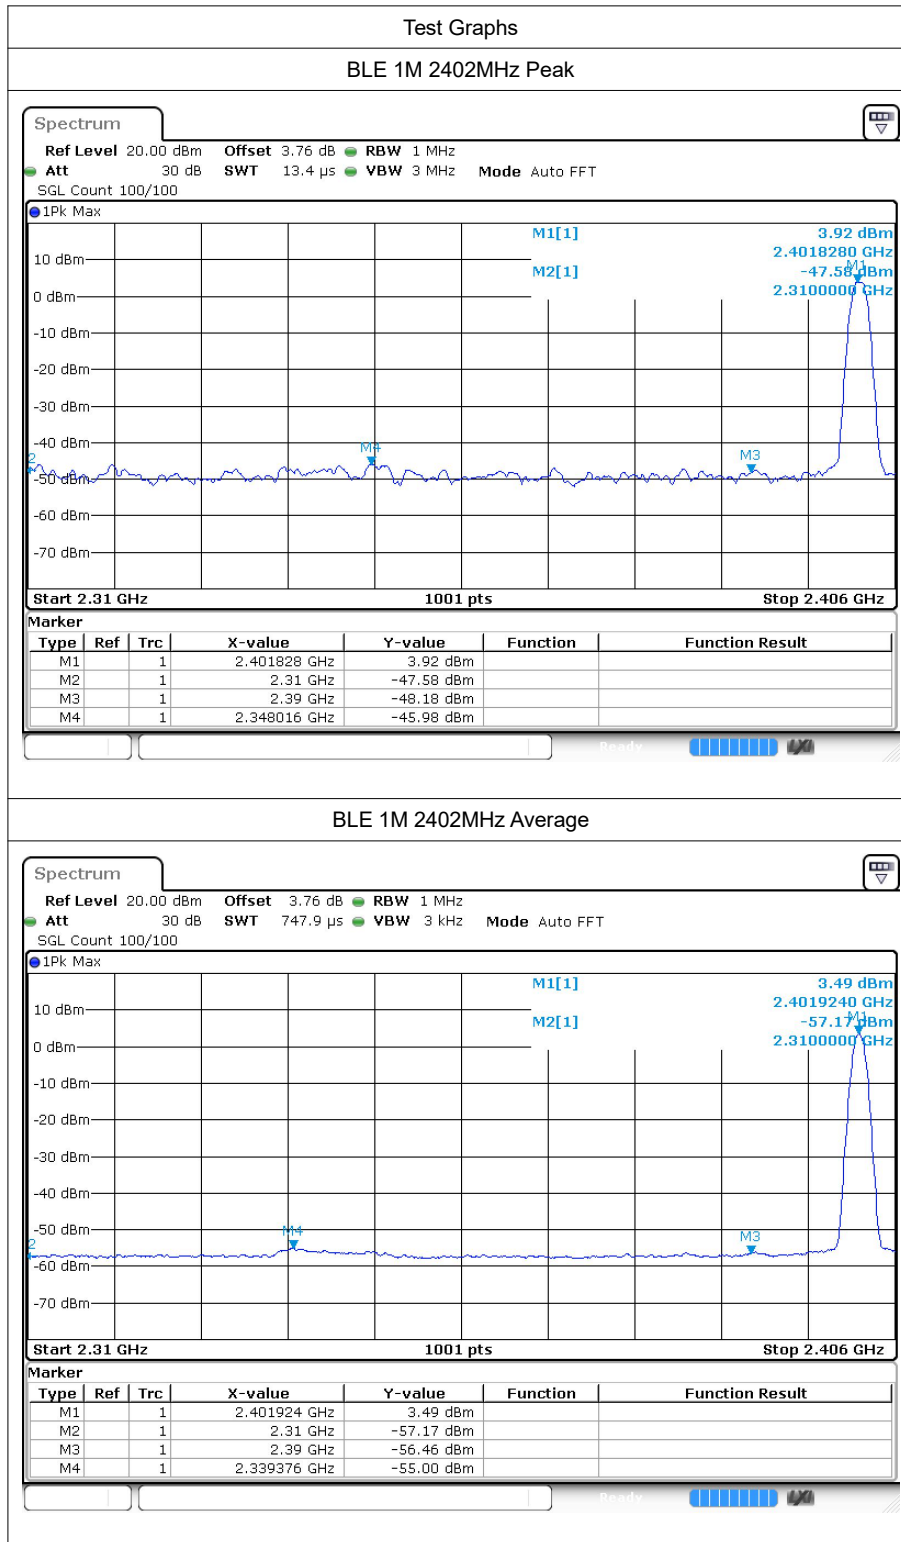

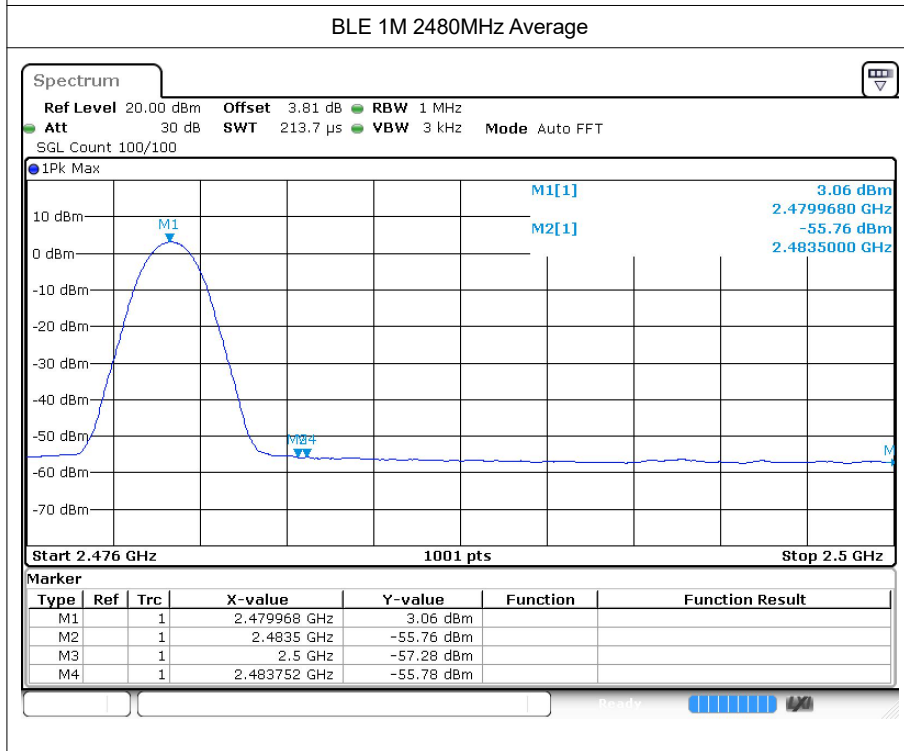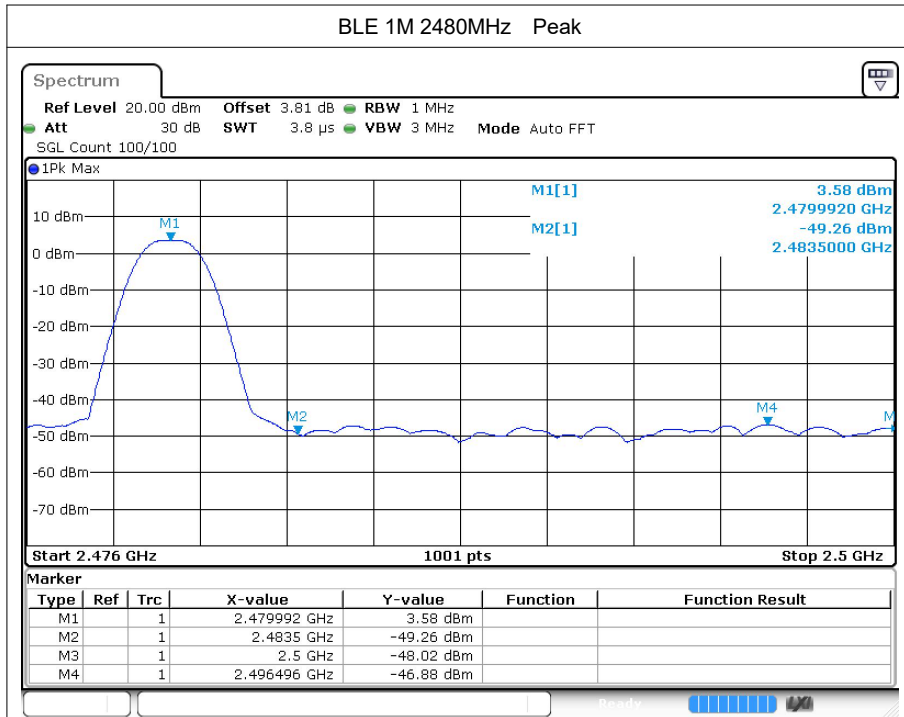

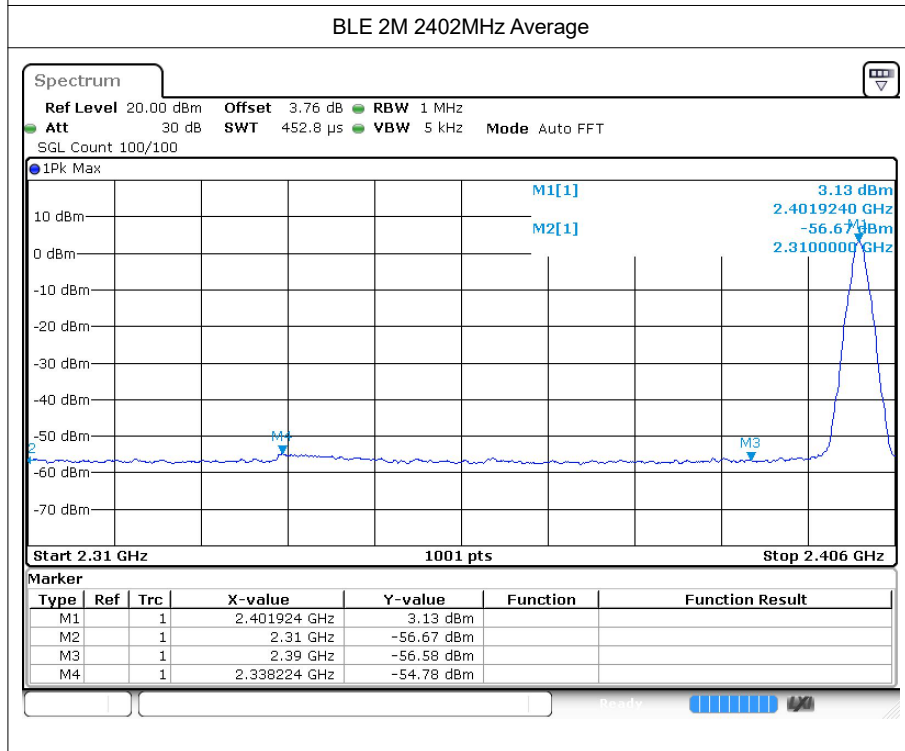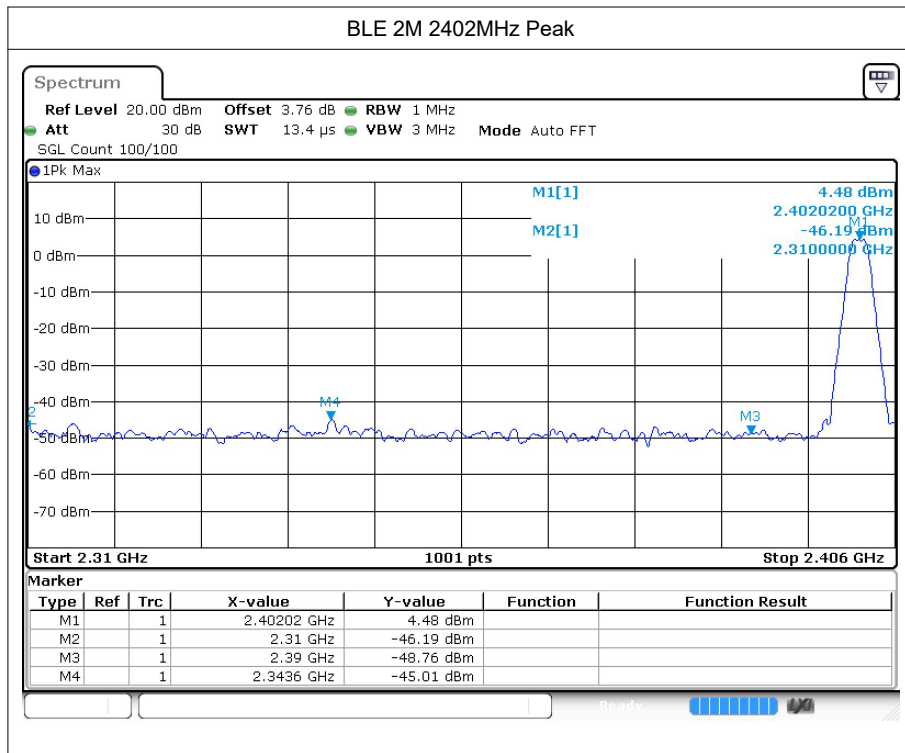

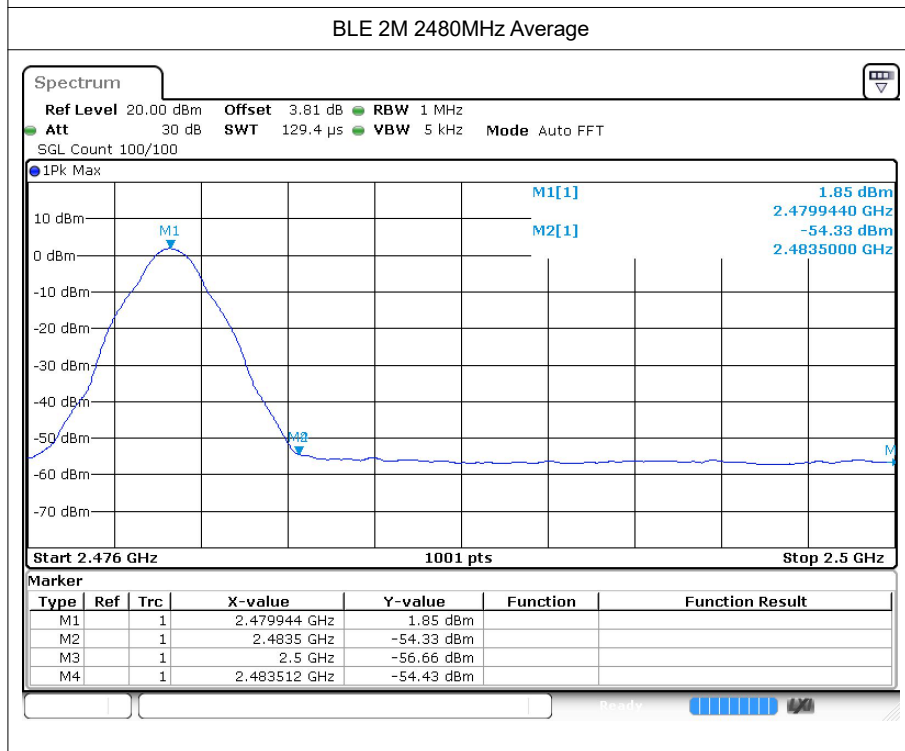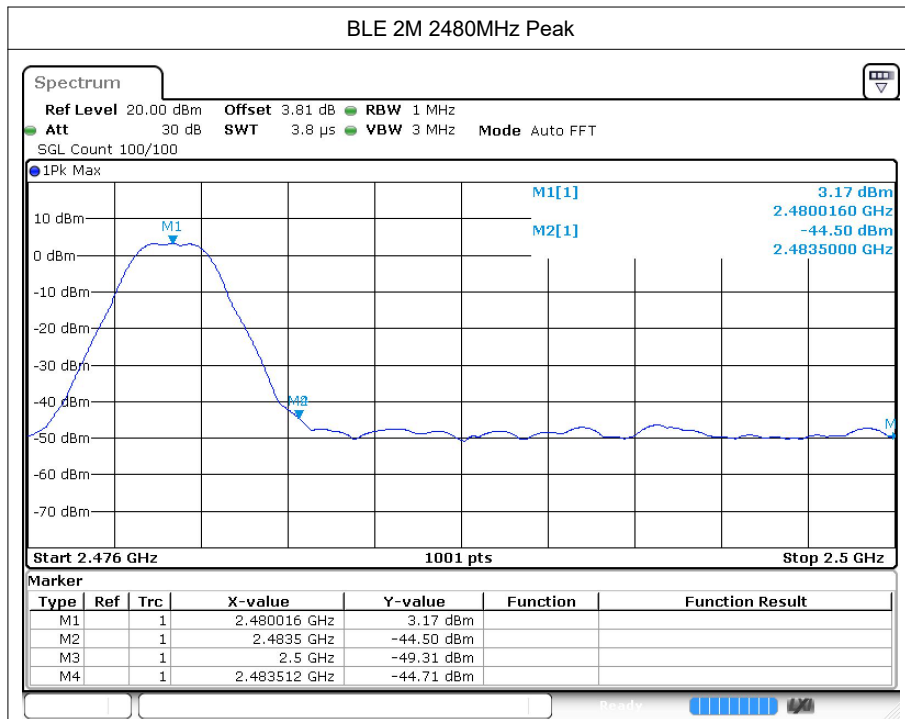

---The End---