



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBERS: A1778

FCC ID: BCG-E3091A

REPORT NUMBER: 16U23328-E4V9

ISSUE DATE: JULY 26, 2016

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	07/12/2016	Initial Issue	Chin Pang
V2	07/15/2016	Addressed TCB Questions	Chin Pang
V3	07/18/2016	Addressed TCB Questions	Eric Yu
V4	07/20/2016	Addressed TCB Questions	Vien Tran
V5	07/21/2016	Addressed TCB Questions	Vien Tran
V6	07/25/2016	Updated Antenna Gain	Tony Li
V7	07/26/2016	Addressed TCB Questions	Vien Tran
V8	07/26/2016	Addressed TCB Questions	Kelvin Huynh
V9	07/26/2016	Updated Maximum Output Power & Test Date	Joe Vang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	11
2. TEST METHODOLOGY	12
3. FACILITIES AND ACCREDITATION	12
4. CALIBRATION AND UNCERTAINTY	13
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	13
4.2. <i>SAMPLE CALCULATION</i>	13
4.3. <i>MEASUREMENT UNCERTAINTY</i>	13
5. EQUIPMENT UNDER TEST.....	14
5.1. <i>DESCRIPTION OF EUT</i>	14
5.2. <i>MAXIMUM OUTPUT POWER</i>	14
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	17
5.4. <i>SOFTWARE AND FIRMWARE</i>	17
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	18
5.6. <i>DESCRIPTION OF TEST SETUP</i>	20
5.7. <i>TEST AND MEASUREMENT EQUIPMENT</i>	26
6. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	27
6.1. <i>ON TIME AND DUTY CYCLE</i>	27
6.2. <i>MEASUREMENT METHODS</i>	31
7. ANTENNA PORT TEST RESULTS	32
7.1. <i>802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND</i>	32
7.1.1. 26 dB BANDWIDTH	32
7.1.2. 99% BANDWIDTH.....	35
7.1.3. AVERAGE POWER.....	38
7.1.4. OUTPUT POWER AND PSD	39
7.2. <i>802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND</i>	43
7.2.1. 26 dB BANDWIDTH	43
7.2.2. 99% BANDWIDTH.....	46
7.2.3. AVERAGE POWER.....	49
7.2.4. OUTPUT POWER AND PSD	50
7.3. <i>802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND</i>	54
7.3.1. 26 dB BANDWIDTH	54
7.3.2. 99% BANDWIDTH.....	58
7.3.3. AVERAGE POWER.....	62
7.3.4. OUTPUT POWER AND PSD	63
7.4. <i>802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND</i>	69
7.4.1. 26 dB BANDWIDTH	69
7.4.2. 99% BANDWIDTH.....	71
7.4.3. AVERAGE POWER.....	73

7.4.4. OUTPUT POWER AND PSD	74
7.5. 802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND	77
7.5.1. 26 dB BANDWIDTH	77
7.5.2. 99% BANDWIDTH.....	79
7.5.3. AVERAGE POWER.....	81
7.5.4. OUTPUT POWER AND PSD	82
7.6. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND	85
7.6.1. 26 dB BANDWIDTH	85
7.6.2. 99% BANDWIDTH.....	88
7.6.3. AVERAGE POWER.....	91
7.6.4. OUTPUT POWER AND PSD	92
7.7. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.2 GHz BAND.....	97
7.7.1. 26 dB BANDWIDTH	97
7.7.2. 99% BANDWIDTH.....	98
7.7.3. AVERAGE POWER.....	99
7.7.4. OUTPUT POWER AND PSD	100
7.8. 802.11ac VHT80 CHAIN 1 MODE IN THE 5.2 GHz BAND.....	103
7.8.1. 26 dB BANDWIDTH	103
7.8.2. 99% BANDWIDTH.....	104
7.8.3. AVERAGE POWER.....	105
7.8.4. OUTPUT POWER AND PSD	106
7.9. 802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND	109
7.9.1. 26 dB BANDWIDTH	109
7.9.2. 99% BANDWIDTH.....	111
7.9.3. AVERAGE POWER.....	113
7.9.4. OUTPUT POWER AND PSD	114
7.10. 802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND	118
7.10.1. 26 dB BANDWIDTH.....	118
7.10.2. 99% BANDWIDTH.....	121
7.10.3. AVERAGE POWER	124
7.10.4. OUTPUT POWER AND PSD	125
7.11. 802.11n HT20 CHAIN 1 MODE IN THE 5.3 GHz BAND	129
7.11.1. 26 dB BANDWIDTH.....	129
7.11.2. 99% BANDWIDTH.....	132
7.11.3. AVERAGE POWER	135
7.11.4. OUTPUT POWER AND PSD	136
7.12. 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND	140
7.12.1. 26 dB BANDWIDTH.....	140
7.12.2. 99% BANDWIDTH.....	144
7.12.3. AVERAGE POWER	148
7.12.4. OUTPUT POWER AND PSD	149
7.13. 802.11n HT40 CHAIN 0 MODE IN THE 5.3 GHz BAND	154
7.13.1. 26 dB BANDWIDTH.....	154
7.13.2. 99% BANDWIDTH.....	156
7.13.3. AVERAGE POWER	158
7.13.4. OUTPUT POWER AND PSD	159
7.14. 802.11n HT40 CHAIN 1 MODE IN THE 5.3 GHz BAND	162
7.14.1. 26 dB BANDWIDTH.....	162

7.14.2.	99% BANDWIDTH	164
7.14.3.	AVERAGE POWER	166
7.14.4.	OUTPUT POWER AND PSD	167
7.15.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND</i>	170
7.15.1.	26 dB BANDWIDTH	170
7.15.2.	99% BANDWIDTH	173
7.15.3.	AVERAGE POWER	176
7.15.4.	OUTPUT POWER AND PSD	177
7.16.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.3 GHz BAND</i>	181
7.16.1.	26 dB BANDWIDTH	181
7.16.2.	99% BANDWIDTH	182
7.16.3.	AVERAGE POWER	183
7.16.4.	OUTPUT POWER AND PSD	184
7.17.	<i>802.11ac VHT80 CHAIN 1 MODE IN THE 5.3 GHz BAND</i>	187
7.17.1.	26 dB BANDWIDTH	187
7.17.2.	99% BANDWIDTH	188
7.17.3.	AVERAGE POWER	189
7.17.4.	OUTPUT POWER AND PSD	190
7.18.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND</i>	193
7.18.1.	26 dB BANDWIDTH	193
7.18.2.	99% BANDWIDTH	195
7.18.3.	AVERAGE POWER	197
7.18.4.	OUTPUT POWER AND PSD	198
7.19.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	201
7.19.1.	26 dB BANDWIDTH	201
7.19.2.	99% BANDWIDTH	204
7.19.3.	AVERAGE POWER	207
7.19.4.	OUTPUT POWER AND PSD	208
7.20.	<i>802.11ac VHT20 CHAIN 0 STRADDLE CHANNEL 144 RESULTS</i>	212
7.20.1.	OUTPUT POWER AND PSD	212
7.20.2.	6 dB BANDWIDTH	216
7.21.	<i>802.11n HT20 CHAIN 1 MODE IN THE 5.6 GHz BAND</i>	217
7.21.1.	26 dB BANDWIDTH	217
7.21.2.	99% BANDWIDTH	220
7.21.3.	AVERAGE POWER	223
7.21.4.	OUTPUT POWER AND PSD	224
7.22.	<i>802.11ac VHT20 CHAIN 1 STRADDLE CHANNEL 144 RESULTS</i>	228
7.22.1.	OUTPUT POWER AND PSD	228
7.22.2.	6 dB BANDWIDTH	232
7.23.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND</i>	233
7.23.1.	26 dB BANDWIDTH	233
7.23.2.	99% BANDWIDTH	238
7.23.3.	AVERAGE POWER	243
7.23.4.	OUTPUT POWER AND PSD	244
7.24.	<i>802.11ac VHT20 2Tx CDD STRADDLE CHANNEL 144 RESULTS</i>	250
7.24.1.	OUTPUT POWER AND PSD	250
7.24.2.	6 dB BANDWIDTH	255
7.25.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	257

7.25.1.	26 dB BANDWIDTH.....	257
7.25.2.	99% BANDWIDTH.....	260
7.25.3.	AVERAGE POWER	263
7.25.4.	OUTPUT POWER AND PSD	264
7.26.	<i>802.11ac VHT40 CHAIN 0 STRADDLE CH 142 RESULTS</i>	268
7.26.1.	OUTPUT POWER AND PSD	268
7.26.2.	6 dB BANDWIDTH.....	272
7.27.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.6 GHz BAND</i>	273
7.27.1.	26 dB BANDWIDTH.....	273
7.27.2.	99% BANDWIDTH.....	276
7.27.3.	AVERAGE POWER	279
7.27.4.	OUTPUT POWER AND PSD	280
7.28.	<i>802.11ac VHT40 CHAIN 1 STRADDLE CH 142 RESULTS</i>	284
7.28.1.	OUTPUT POWER AND PSD	284
7.28.2.	6 dB BANDWIDTH.....	288
7.29.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND</i>	289
7.29.1.	26 dB BANDWIDTH.....	289
7.29.2.	99% BANDWIDTH.....	294
7.29.3.	AVERAGE POWER	299
7.29.4.	OUTPUT POWER AND PSD	300
7.30.	<i>802.11ac VHT40 2Tx CDD STRADDLE CHANNEL 142 RESULTS</i>	306
7.30.1.	OUTPUT POWER AND PSD	306
7.30.2.	6 dB BANDWIDTH.....	311
7.31.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	313
7.31.1.	26 dB BANDWIDTH.....	313
7.31.2.	99% BANDWIDTH.....	316
7.31.3.	AVERAGE POWER	319
7.31.4.	OUTPUT POWER AND PSD	320
7.31.5.	STRADDLE CHANNEL 138 RESULTS.....	323
7.31.6.	6 dB BANDWIDTH.....	327
7.32.	<i>802.11ac VHT80 CHAIN 1 MODE IN THE 5.6 GHz BAND</i>	328
7.32.1.	26 dB BANDWIDTH.....	328
7.32.2.	99% BANDWIDTH.....	331
7.32.3.	AVERAGE POWER	334
7.32.4.	OUTPUT POWER AND PSD	335
7.32.5.	STRADDLE CHANNEL 138 RESULTS.....	338
7.32.6.	6 dB BANDWIDTH.....	342
7.33.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND (5610MHz for FCC only)</i>	343
7.33.1.	26 dB BANDWIDTH.....	343
7.33.2.	99% BANDWIDTH.....	347
7.33.3.	AVERAGE POWER	351
7.33.4.	OUTPUT POWER AND PSD	352
7.33.5.	STRADDLE CHANNEL 138 RESULTS.....	357
7.33.6.	6 dB BANDWIDTH.....	362
7.34.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.8 GHz BAND</i>	364
7.34.1.	6 dB BANDWIDTH.....	364
7.34.2.	26 dB BANDWIDTH.....	367
7.34.3.	99% BANDWIDTH.....	370
7.34.4.	AVERAGE POWER	373

7.34.5. OUTPUT POWER.....	374
7.34.6. PSD	376
7.35. 802.11n HT20 CHAIN 1 MODE IN THE 5.8 GHz BAND	379
7.35.1. 6 dB BANDWIDTH.....	379
7.35.2. 26 dB BANDWIDTH.....	382
7.35.3. 99% BANDWIDTH	385
7.35.4. AVERAGE POWER	388
7.35.5. OUTPUT POWER.....	389
7.35.6. PSD	391
7.36. 802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND.....	394
7.36.1. 6 dB BANDWIDTH.....	394
7.36.2. 26 dB BANDWIDTH.....	398
7.36.3. 99% BANDWIDTH	402
7.36.4. AVERAGE POWER	406
7.36.5. OUTPUT POWER.....	407
7.36.6. PSD	409
7.37. 802.11n HT40 CHAIN 0 MODE IN THE 5.8 GHz BAND	414
7.37.1. 6 dB BANDWIDTH.....	414
7.37.2. 26 dB BANDWIDTH.....	416
7.37.3. 99% BANDWIDTH	418
7.37.4. AVERAGE POWER	420
7.37.5. OUTPUT POWER.....	421
7.37.6. PSD	423
7.38. 802.11n HT40 CHAIN 1 MODE IN THE 5.8 GHz BAND	426
7.38.1. 6 dB BANDWIDTH.....	426
7.38.2. 26 dB BANDWIDTH.....	428
7.38.3. 99% BANDWIDTH	430
7.38.4. AVERAGE POWER	432
7.38.5. OUTPUT POWER.....	433
7.38.6. PSD	435
7.39. 802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND	438
7.39.1. 6 dB BANDWIDTH.....	438
7.39.2. 26 dB BANDWIDTH.....	441
7.39.3. 99% BANDWIDTH	444
7.39.4. AVERAGE POWER	447
7.39.5. OUTPUT POWER.....	448
7.39.6. PSD	450
7.40. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.8 GHz BAND	454
7.40.1. 6 dB BANDWIDTH.....	454
7.40.2. 26 dB BANDWIDTH.....	455
7.40.3. 99% BANDWIDTH	456
7.40.4. AVERAGE POWER	457
7.40.5. OUTPUT POWER.....	458
7.40.6. PSD	460
7.41. 802.11ac VHT80 CHAIN 1 MODE IN THE 5.8 GHz BAND	462
7.41.1. 6 dB BANDWIDTH.....	462
7.41.2. 26 dB BANDWIDTH.....	463
7.41.3. 99% BANDWIDTH	464
7.41.4. AVERAGE POWER	465
7.41.5. OUTPUT POWER.....	466

7.41.6. PSD	468
7.42. 802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND	470
7.42.1. 6 dB BANDWIDTH	470
7.42.2. 26 dB BANDWIDTH	472
7.42.3. 99% BANDWIDTH	474
7.42.4. AVERAGE POWER	476
7.42.5. OUTPUT POWER	477
7.42.6. PSD	479
8. RADIATED TEST RESULTS	482
8.1. LIMITS AND PROCEDURE	482
8.2. 802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND	483
8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND	499
8.4. 802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND	507
8.5. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND	519
8.6. 802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND	525
8.7. 802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND	533
8.8. 802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND	537
8.9. 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz	553
8.10. 802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND	561
8.11. 802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND	573
8.12. 802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND	579
8.13. 802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND	587
8.14. 802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND	591
8.15. 802.11ac VHT20 1Tx STRADDLE CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS	611
8.16. 802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND	615
8.17. 802.11ac VHT20 2Tx CDD STRADDLE CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS	625
8.18. 802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND Chain 1 High channel	627
8.19. 802.11ac VHT40 1Tx STRADDLE CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS	647
8.20. 802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND	651
8.21. 802.11ac VHT40 2Tx CDD STRADDLE CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS	661
8.22. 802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND	663
8.23. 802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND	679
8.24. 802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND	687
8.25. 802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND	707
8.26. 802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND	717

8.27.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND</i>	733
8.28.	<i>802.11ac VHT80 1Tx MODE IN THE 5.8 GHz BAND</i>	741
8.29.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND</i>	753
8.29.1.	<i>WORST-CASE BELOW 1 GHz</i>	759
8.30.	<i>WORST-CASE ABOVE 18 GHz</i>	761
9.	AC POWER LINE CONDUCTED EMISSIONS	765
9.1.	<i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE</i>	766
9.2.	<i>EUT POWERED BY HOST PC VIA USB CABLE</i>	768
10.	DYNAMIC FREQUENCY SELECTION	770
10.1.	<i>OVERVIEW</i>	770
10.1.1.	<i>LIMITS</i>	770
10.1.2.	<i>TEST AND MEASUREMENT SYSTEM</i>	774
10.1.3.	<i>TEST AND MEASUREMENT SOFTWARE</i>	776
10.1.4.	<i>SETUP OF EUT (CLIENT MODE)</i>	777
10.1.5.	<i>SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)</i>	778
10.1.6.	<i>DESCRIPTION OF EUT</i>	779
10.2.	<i>CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH</i>	781
10.2.1.	<i>TEST CHANNEL</i>	781
10.2.2.	<i>RADAR WAVEFORM AND TRAFFIC</i>	781
10.2.3.	<i>OVERLAPPING CHANNEL TESTS</i>	784
10.2.4.	<i>MOVE AND CLOSING TIME</i>	784
10.3.	<i>CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH</i>	788
10.3.1.	<i>TEST CHANNEL</i>	788
10.3.2.	<i>RADAR WAVEFORM AND TRAFFIC</i>	788
10.3.3.	<i>OVERLAPPING CHANNEL TESTS</i>	791
10.3.4.	<i>MOVE AND CLOSING TIME</i>	791
10.4.	<i>CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH</i>	795
10.4.1.	<i>TEST CHANNEL</i>	795
10.4.2.	<i>RADAR WAVEFORM AND TRAFFIC</i>	795
10.4.3.	<i>OVERLAPPING CHANNEL TESTS</i>	798
10.4.4.	<i>MOVE AND CLOSING TIME</i>	798
10.4.5.	<i>10-MINUTE CLIENT Tx MONITORING PERIOD</i>	802
10.5.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH</i>	803
10.5.1.	<i>TEST CHANNEL</i>	803
10.5.2.	<i>RADAR WAVEFORM AND TRAFFIC</i>	803
10.5.3.	<i>OVERLAPPING CHANNEL TESTS</i>	806
10.5.4.	<i>MOVE AND CLOSING TIME</i>	806
10.6.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH</i>	810
10.6.1.	<i>TEST CHANNEL</i>	810
10.6.2.	<i>RADAR WAVEFORM AND TRAFFIC</i>	810
10.6.3.	<i>OVERLAPPING CHANNEL TESTS</i>	813
10.6.4.	<i>MOVE AND CLOSING TIME</i>	813

10.7. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH	
817	
10.7.1. TEST CHANNEL.....	817
10.7.2. RADAR WAVEFORM AND TRAFFIC	817
10.7.3. OVERLAPPING CHANNEL TESTS.....	820
10.7.4. MOVE AND CLOSING TIME	820
10.7.5. 10-MINUTE CLIENT Tx MONITORING PERIOD	824
11. SETUP PHOTOS.....	825

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1778

SERIAL NUMBER: C7CRP0NGHCWC (CONDUCTED);
C7CQV04NH2GR (RADIATED)

DATE TESTED: MARCH 08 – JULY 26, 2016

APPLICABLE STANDARDS

STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:



ERIC YU
EMC LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

FCC: The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D07 v01r01, FCC KDB 789033 D02 v01r02, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input checked="" type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input checked="" type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input checked="" type="checkbox"/> Chamber F
	<input checked="" type="checkbox"/> Chamber G
	<input checked="" type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\quad \text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT, Model A1778 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/LTE radio, IEEE 802.11a/b/g/n/ac, NFC and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

NOTE: Covered modes are test reduction modes. The output powers on the "covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	19.40	87.10
	802.11n HT20 2TX CDD	19.95	98.86
	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
5190 - 5230	802.11n HT40 SISO	18.94	78.34
	802.11n HT40 2TX CDD	21.94	156.31
	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX TBC/SDM	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	15.48	35.32
	802.11ac VHT80 2TX CDD	17.89	61.52
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11ac VHT80 2TX CDD	

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	18.89	77.45
	802.11n HT20 2TX CDD	19.92	98.17
	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
5270 - 5310	802.11n HT40 SISO	18.93	78.16
	802.11n HT40 2TX CDD	21.62	145.21
	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	13.98	25.00
	802.11ac VHT80 2TX CDD	15.85	38.46
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11ac VHT80 2TX CDD	

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	18.93	78.16
	802.11n HT20 2TX CDD	19.41	87.30
	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	18.56	71.78
	802.11ac VHT20 2TX CDD (based on UNII-2C band output power)	18.98	79.07
	802.11ac VHT20 2TX STBC/SDM (based on UNII-2C band output)	Covered by 802.11ac VHT20 2TX CDD	
5510 - 5670	802.11n HT40 SISO	18.80	75.86
	802.11n HT40 2TX CDD	20.65	116.14
	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	18.48	70.47
	802.11ac VHT40 2TX CDD (based on UNII-2C band output power)	20.21	104.95
	802.11ac VHT40 2TX STBC/SDM (based on UNII-2C band output)	Covered by 802.11ac VHT40 2TX CDD	
5530-5610	802.11ac VHT80 SISO	18.82	76.21
	802.11ac VHT80 2TX CDD	20.66	116.41
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	18.82	76.21
	802.11ac VHT80 2TX CDD (based on UNII-2C band output power)	20.73	118.30
	802.11ac VHT80 2TX STBC/SDM (based on UNII-2C band output)	Covered by 802.11ac VHT80 2TX CDD	

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	18.89	77.45
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	21.01	126.18
	802.11n HT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
	802.11a VHT20 2TX STBC/SDM	Covered by 802.11n HT20 2TX CDD	
5755 - 5795	802.11n HT40 SISO	19.00	79.43
	802.11n HT40 2TX CDD	21.07	127.94
	802.11n HT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC/SDM	Covered by 802.11n HT40 2TX CDD	
5775	802.11ac VHT80 SISO	18.84	76.56
	802.11ac VHT80 2TX CDD	20.73	118.30
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11ac VHT80 2TX CDD	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Chain 0	Chain 1
5.2	-4.74	-6.01
5.3	-5.06	-5.08
5.5	-4.78	-3.10
5.8	-2.73	-5.52

5.4. SOFTWARE AND FIRMWARE

The firmware version installed in the EUT during testing was 9.44.11.27.

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The output power for PSD and spurious tests was set higher than maximum for the purposes of testing only.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either Chain 0 or Chain 1. Both antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For MIMO modes, both Chain 0 and Chain 1 used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Chain 0	Z-Portrait
		Chain 1	Z-Portrait
	2TX MIMO	Chain 0 + Chain 1	Z-Portrait

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
 802.11n HT20 mode: MCS0
 802.11n HT40 mode: MCS0
 802.11ac VHT20 mode: MCS0
 802.11ac VHT40 mode: MCS0
 802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the 2.4GHz and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

The following configurations were investigated on AC line conducted test.

Configuration	Descriptions
1	EUT powered by AC/DC adapter via USB cable
2	EUT powered by host PC via USB cable

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	MacBook Pro	W885200F70K	NA
Laptop Power Supply	Apple	A1343	C0420640G9KDJ92BD	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	2	USB	Shielded	1	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (BELOW 1 GHZ)

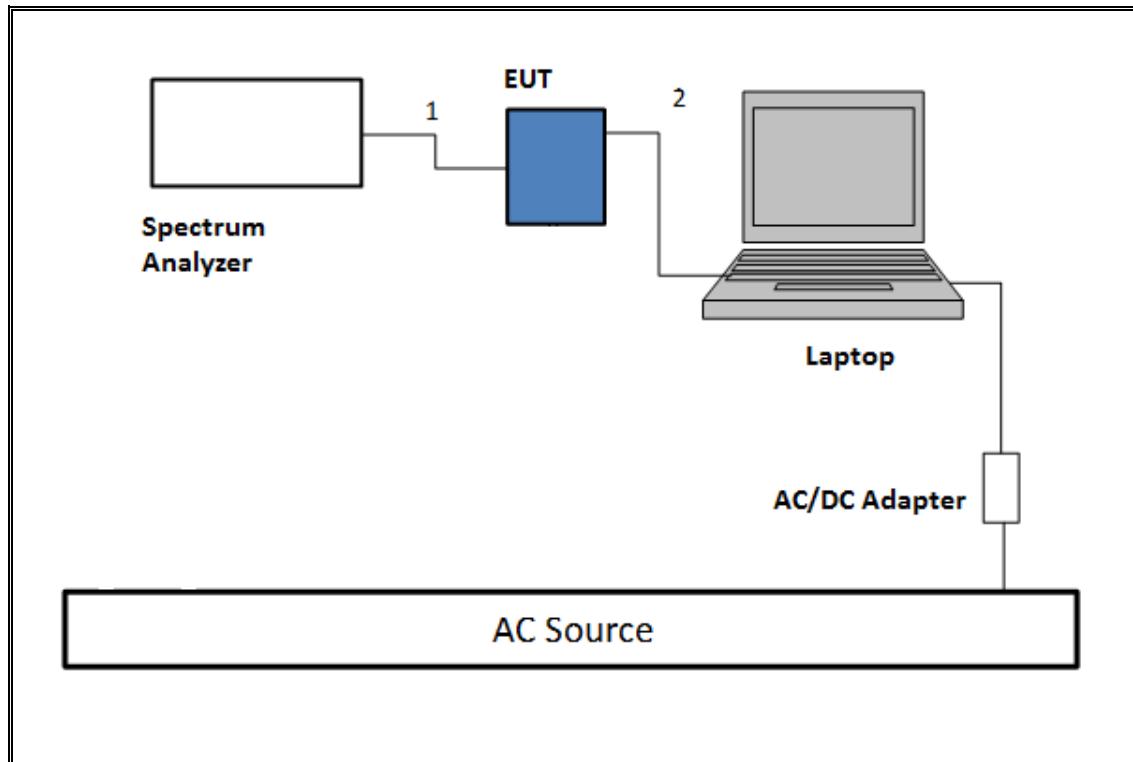
I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (AC LINE CONDUCTED: AC/DC ADAPTER &LAPTOP CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A
2	Power Adapter	1	AC	Un-shielded	3	N/A

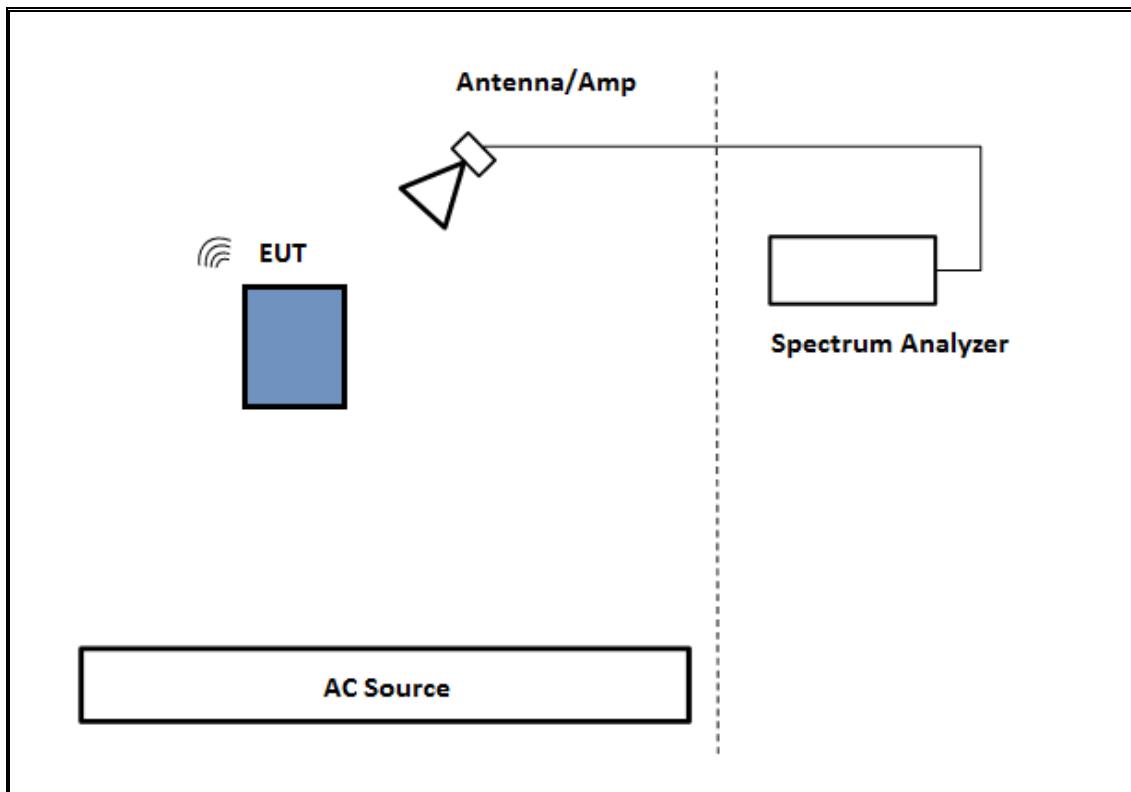
TEST SETUP

The EUT was connected to a host Laptop via USB cable and to spectrum analyzer via antenna port. Test software exercised the EUT.

SETUP DIAGRAM

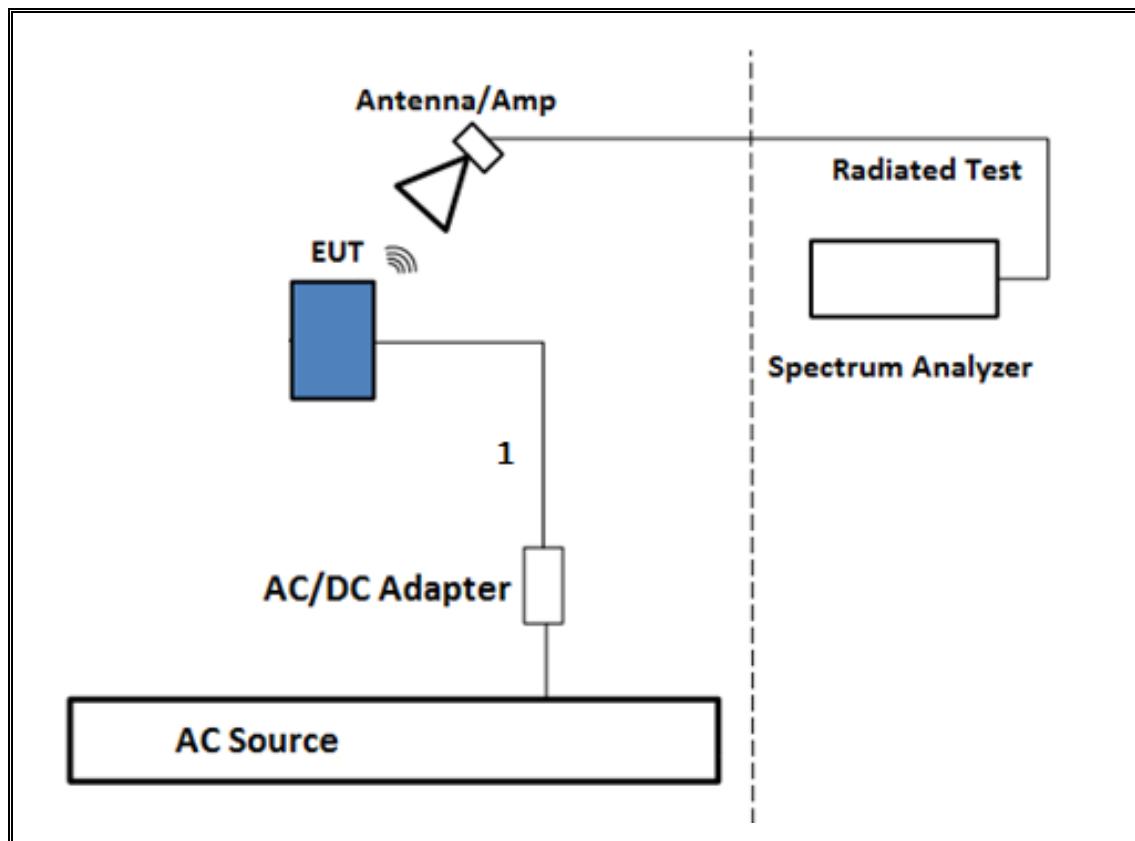
TEST SETUP- RADIATED-ABOVE 1 GHZ

The battery powered EUT was tested as a standalone unit. Test software exercised the EUT.

SETUP DIAGRAM

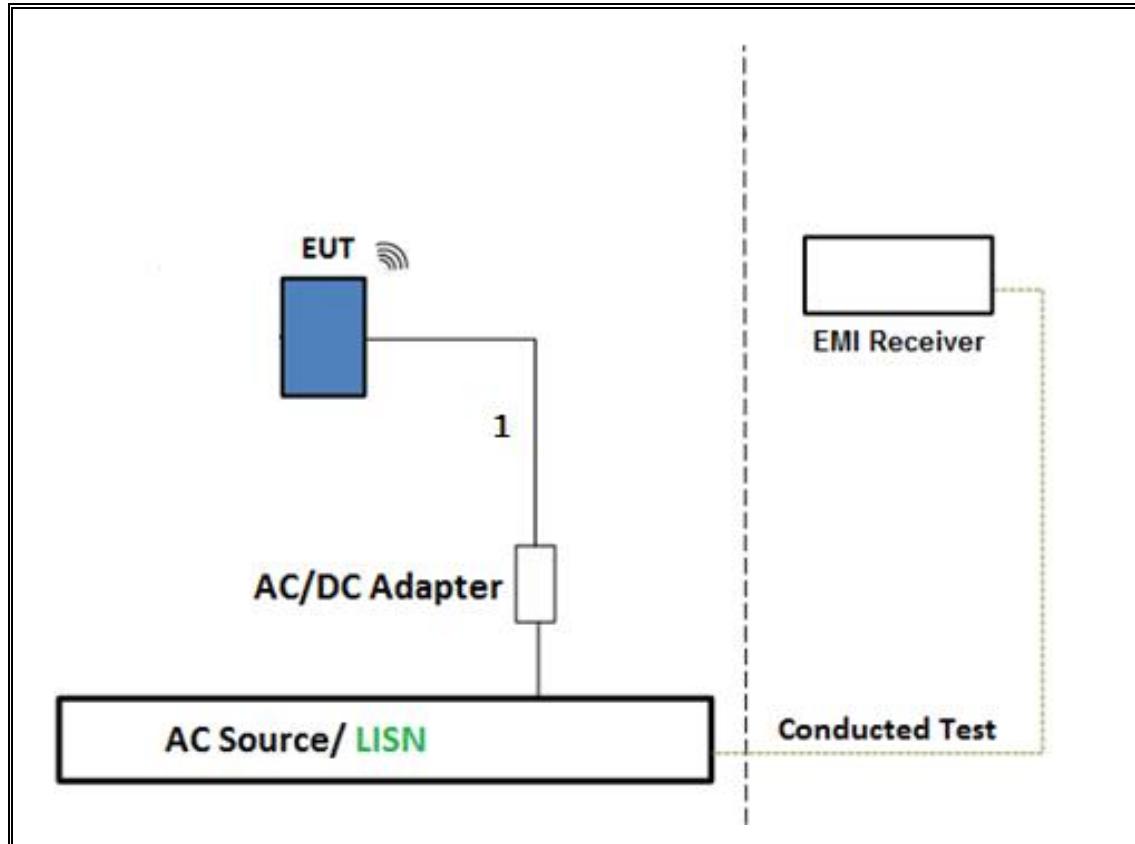
TEST SETUP- BELOW 1GHZ

The EUT was tested with powered by AC/DC adapter via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

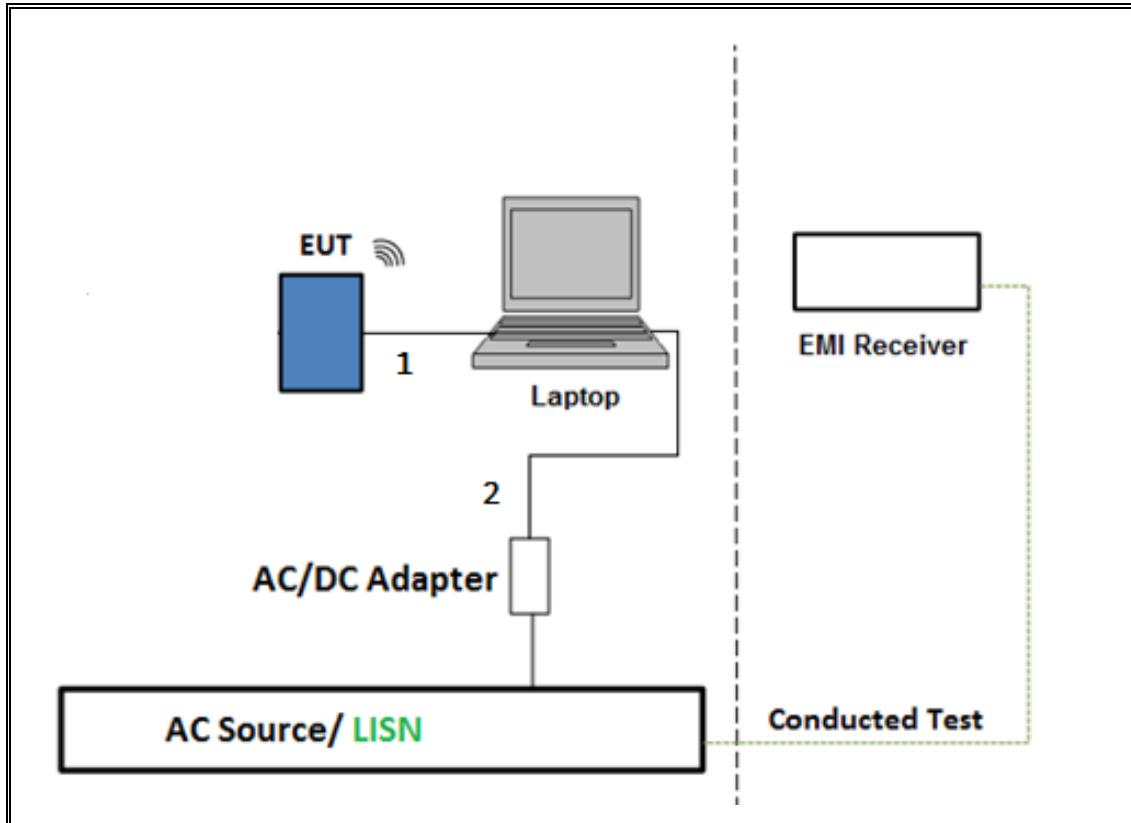
TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER

The EUT was tested with powered by AC/DC adapter via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

5.7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	00143448	2/10/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	A022813-1	10/28/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1782158	1/25/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	323561	6/8/2016
Spectrum Analyzer, PXA, 3Hz to 50GHz	Agilent	N9030A	MY52350427	8/4/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	325117	6/9/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A-544	US51160264	11/19/2016
Power Meter, P-series single channel	Agilent	N1911A	GB45100212	9/25/2016
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	MY53260010	7/12/2016
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	3008A04710	6/29/2016
Amplifier, 26 - 40GHz	Miteq	NSP4000-SP2	924343	4/7/2017
Spectrum Analyzer, 40 GHz	Keysight	8564E	3943A01643	8/14/2016
Horn Antenna, 40GHz	ARA	MWH-2640/B	1029	7/28/2016
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	209336	5/12/2016
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	100935	9/16/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2	161124	9/16/2016
Power Cable, Line Conducted Emissions	UL	PG1	N/A	7/28/2016
UL SOFTWARE				
*Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015	
*Conducted Software	UL	UL EMC	Ver 4.0, January 11, 2016	
*AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

Note: * indicates automation software version used in the compliance certification testing

6. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

6.1. ON TIME AND DUTY CYCLE

LIMITS

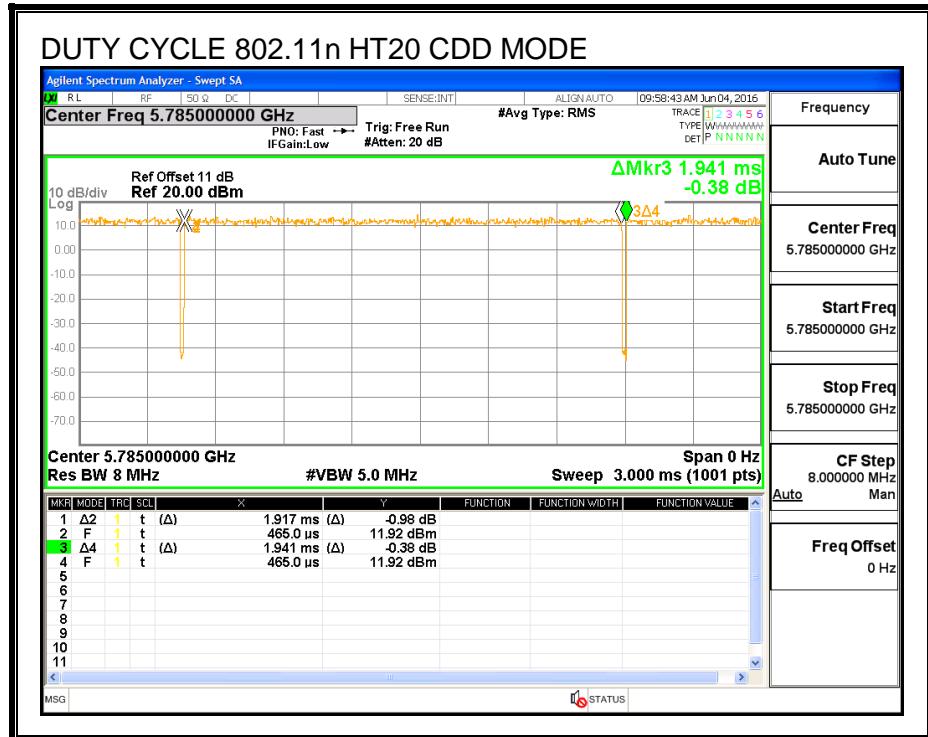
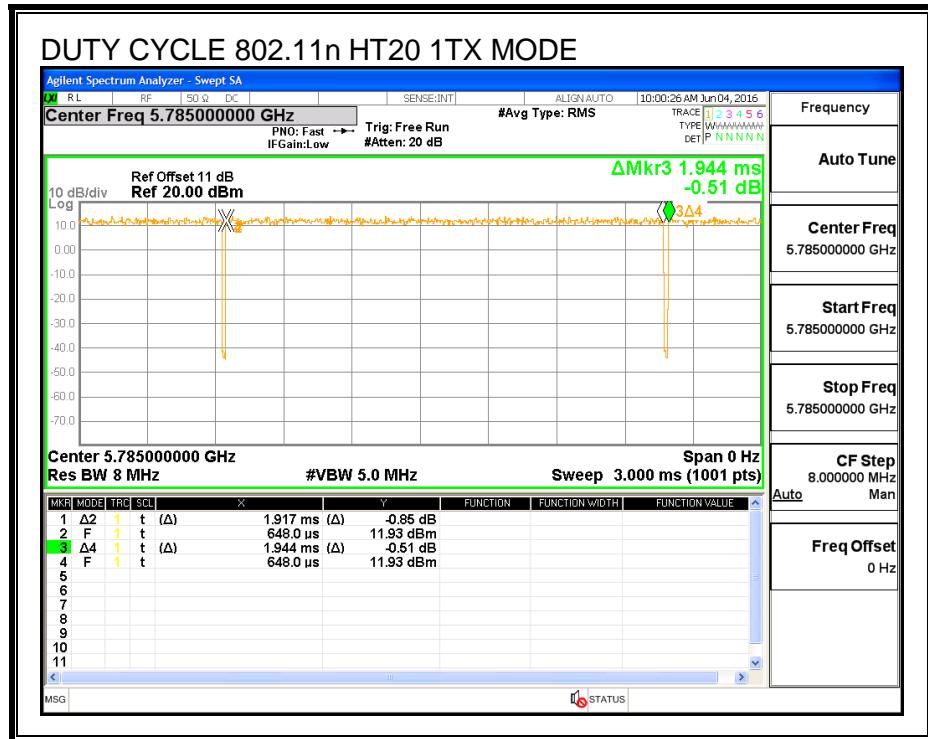
None; for reporting purposes only.

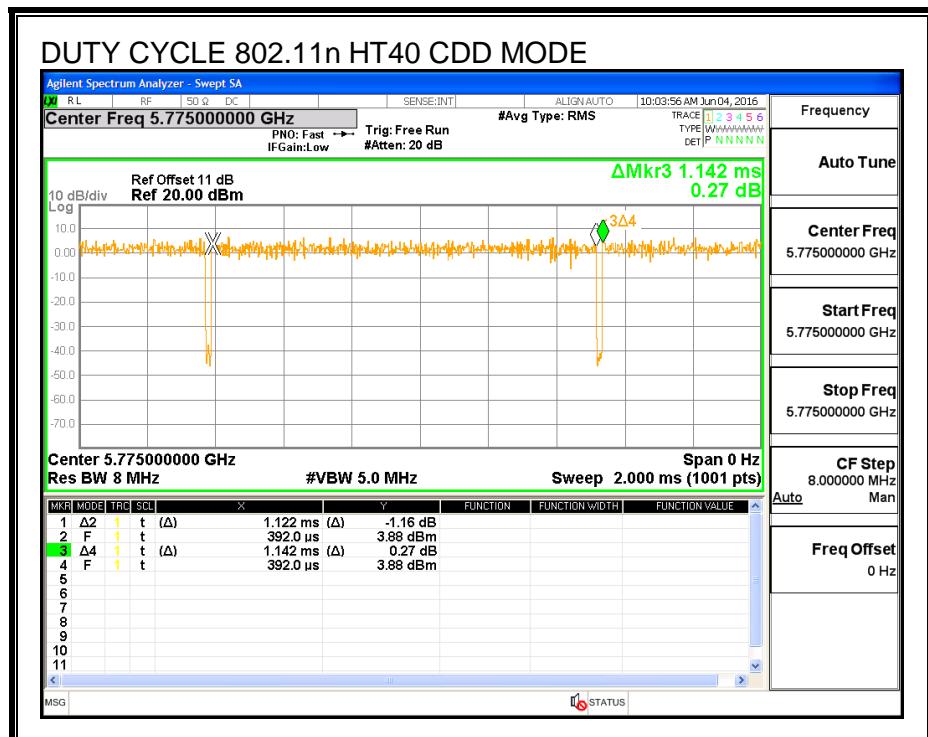
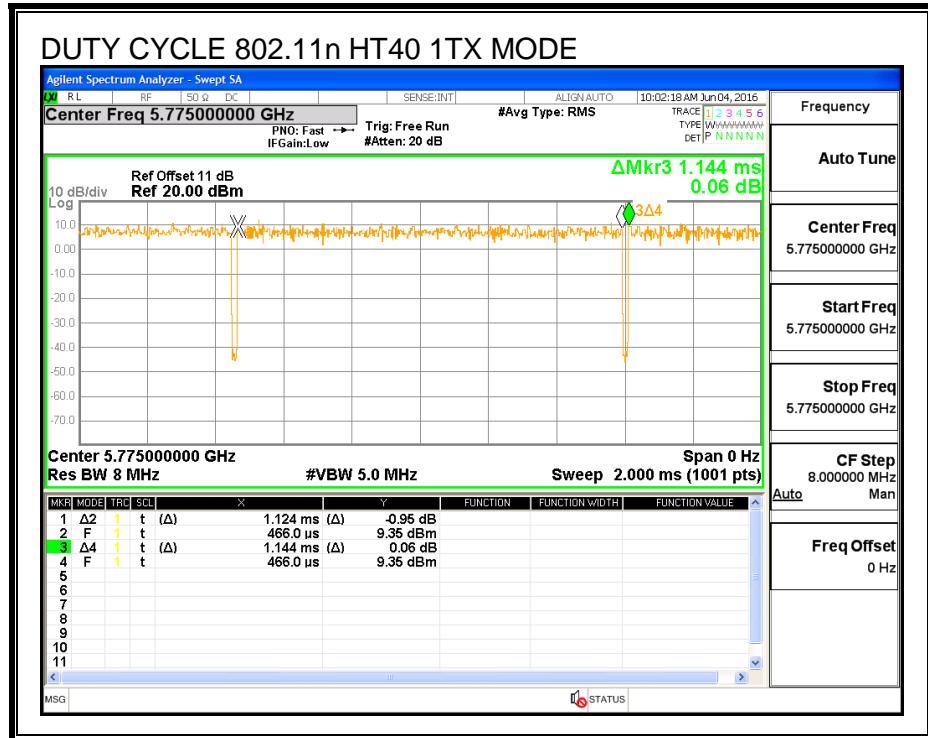
PROCEDURE

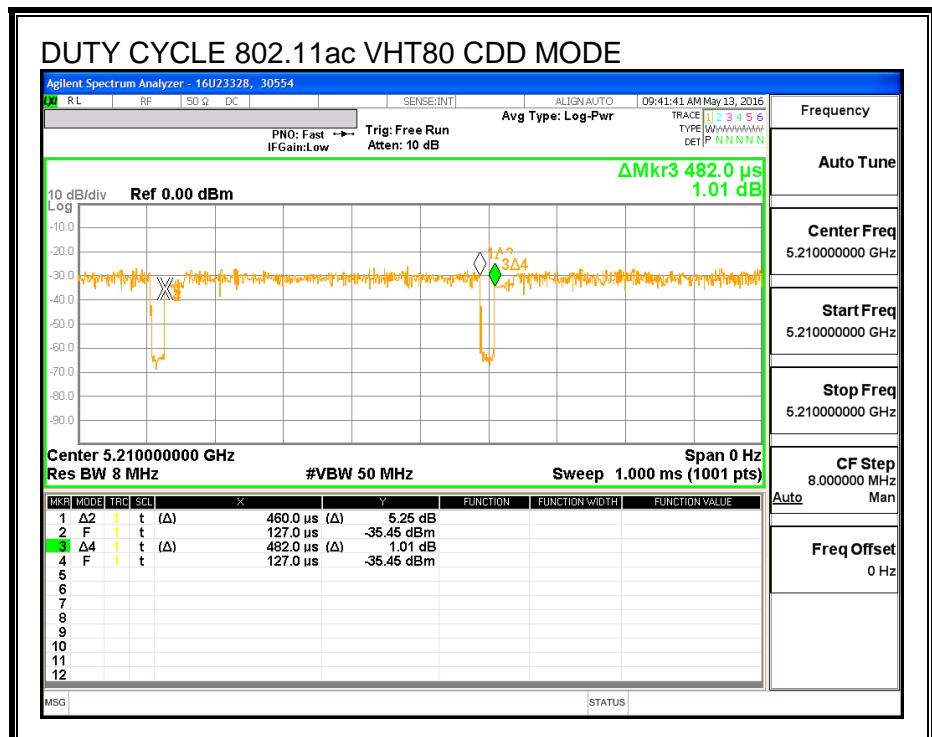
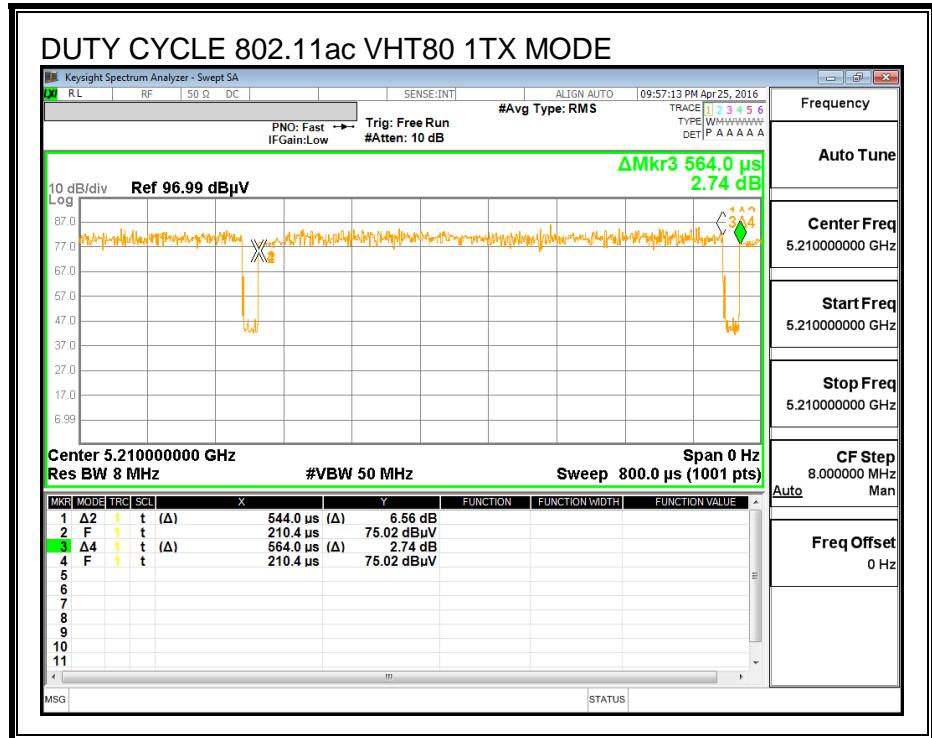
KDB 789033 Zero-Span Spectrum Analyzer Method.

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.917	1.944	0.986	98.61%	0.00	0.010
802.11n HT20 CDD	1.917	1.941	0.988	98.76%	0.00	0.010
802.11n HT40 1TX	1.124	1.144	0.983	98.25%	0.00	0.010
802.11n HT40 CDD	1.122	1.142	0.982	98.25%	0.00	0.010
802.11ac VHT80 1TX	0.544	0.564	0.965	96.45%	0.16	1.838
802.11ac VHT80 CDD	0.460	0.482	0.954	95.44%	0.20	2.174

DUTY CYCLE PLOTS





6.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r02, Section C.

26 dB Emission BW: KDB 789033 D02 v01r02, Section C.

99% Occupied BW: KDB 789033 D02 v01r02, Section D.

Conducted Output Power: KDB 789033 D02 v01r02, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r02, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r02, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r02, Sections G.3, G.4, and G.5.

7. ANTENNA PORT TEST RESULTS

7.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND

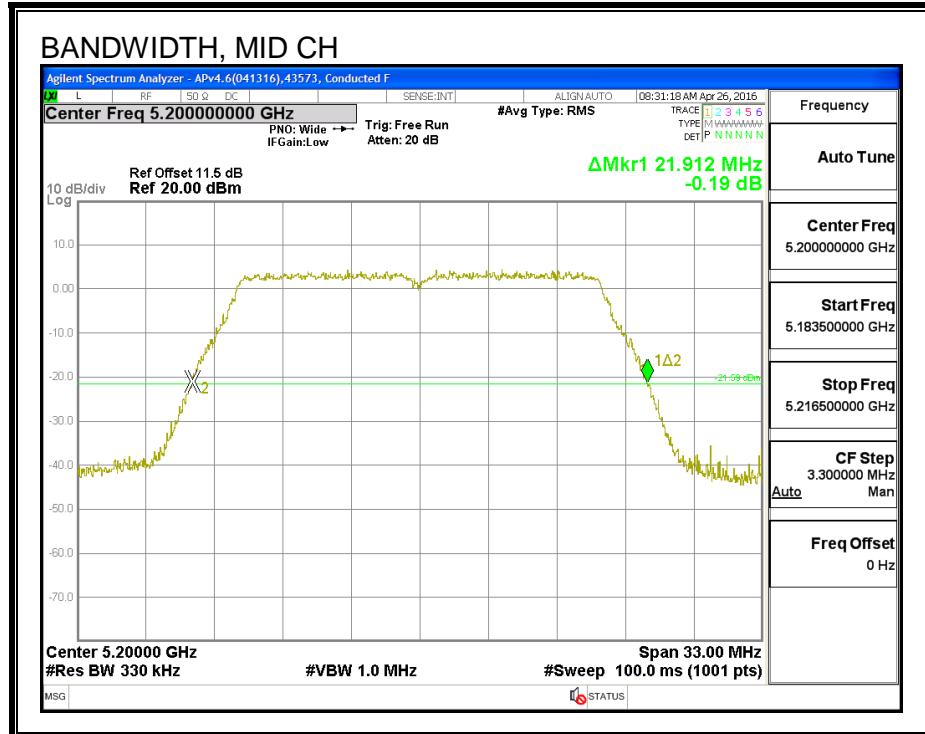
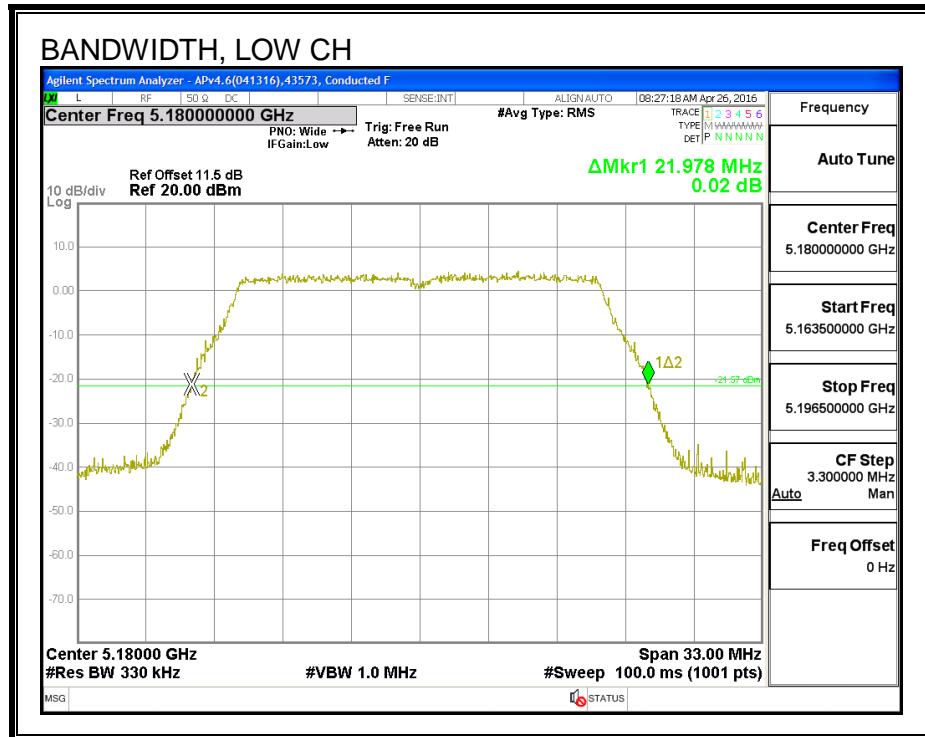
7.1.1. 26 dB BANDWIDTH

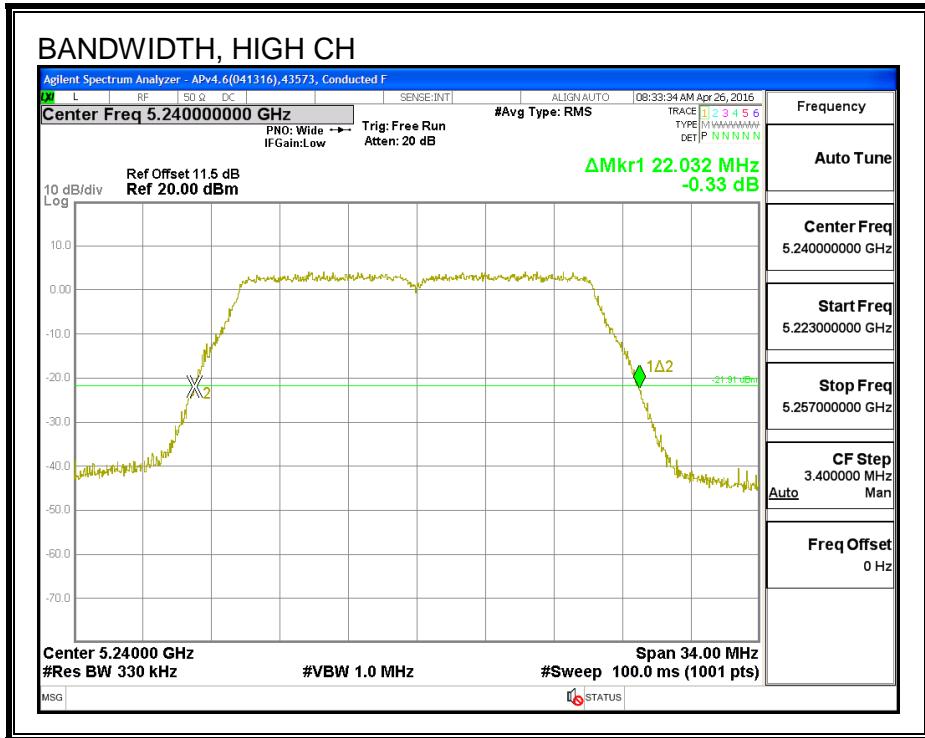
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.98
Mid	5200	21.91
High	5240	22.03

26 dB BANDWIDTH



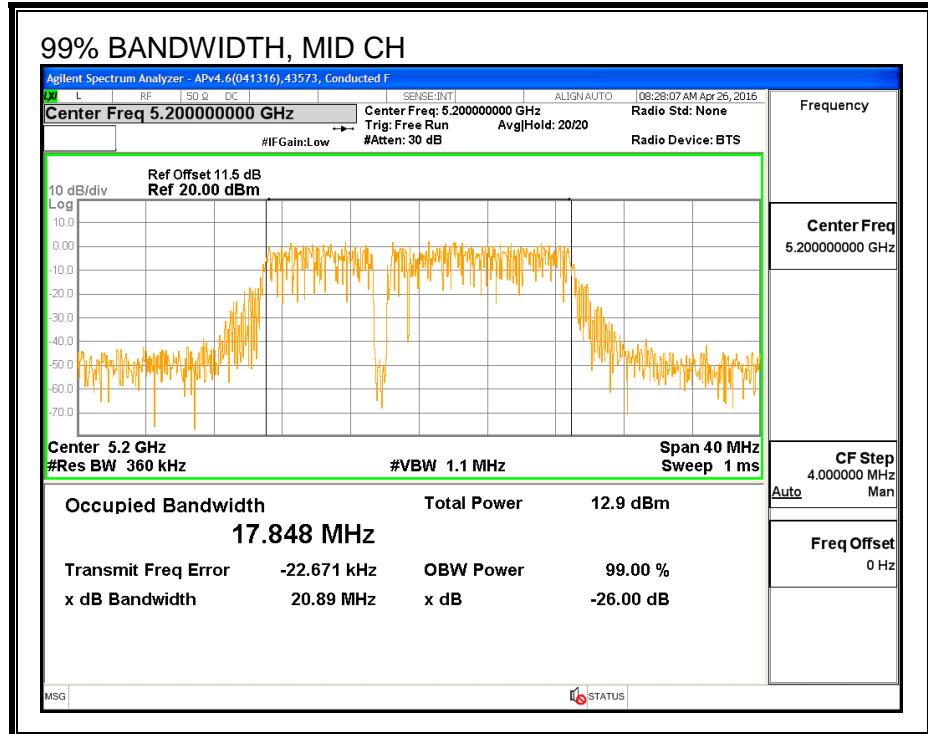
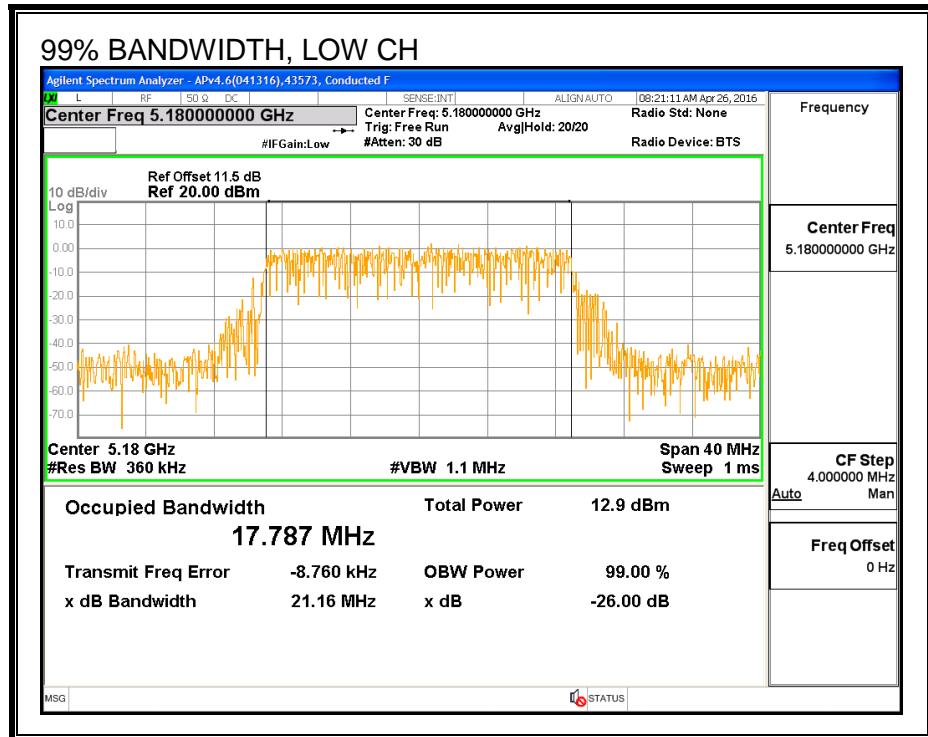
7.1.2. 99% BANDWIDTH

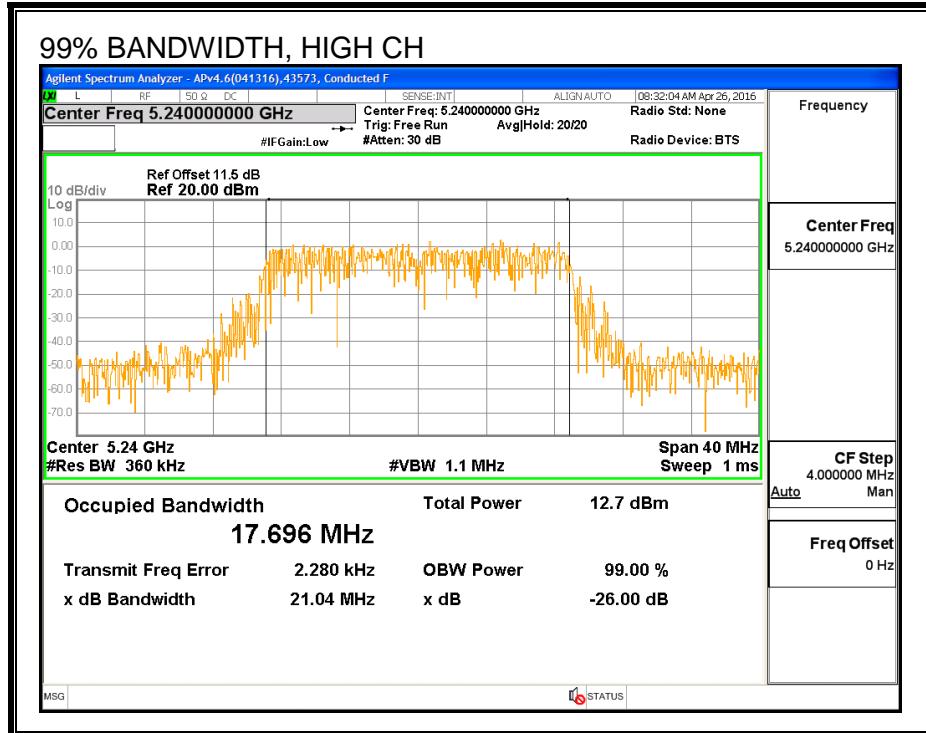
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.787
Mid	5200	17.848
High	5240	17.696

99% BANDWIDTH



7.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	17.49
Mid	5200	19.40
High	5240	19.35

7.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-4.74	-4.74	24.00	11.00
Mid	5200	-4.74	-4.74	24.00	11.00
High	5240	-4.74	-4.74	24.00	11.00

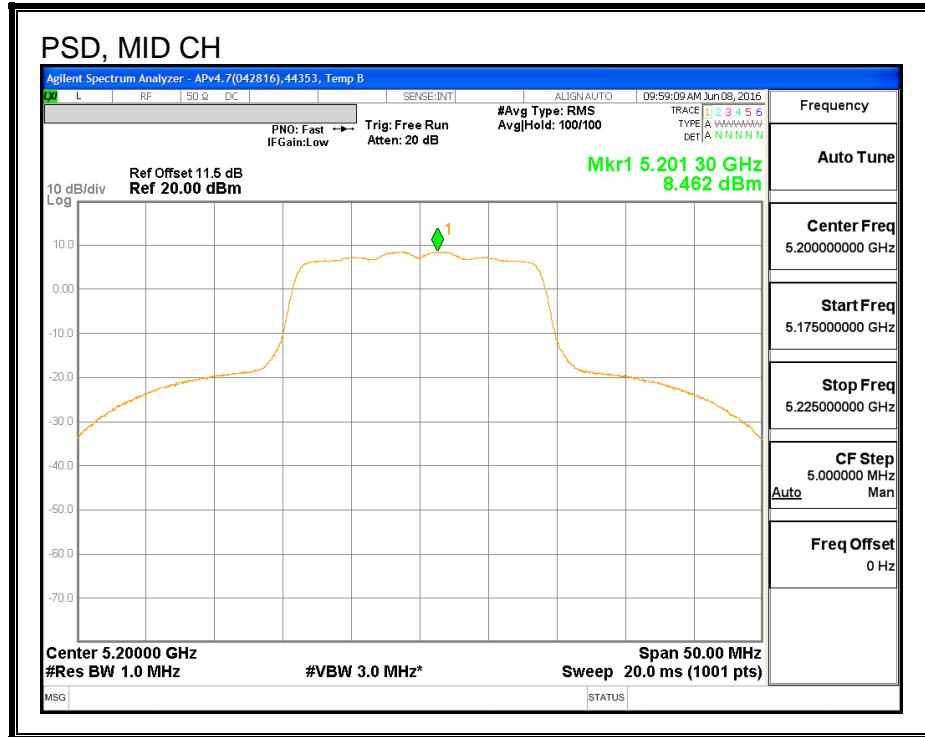
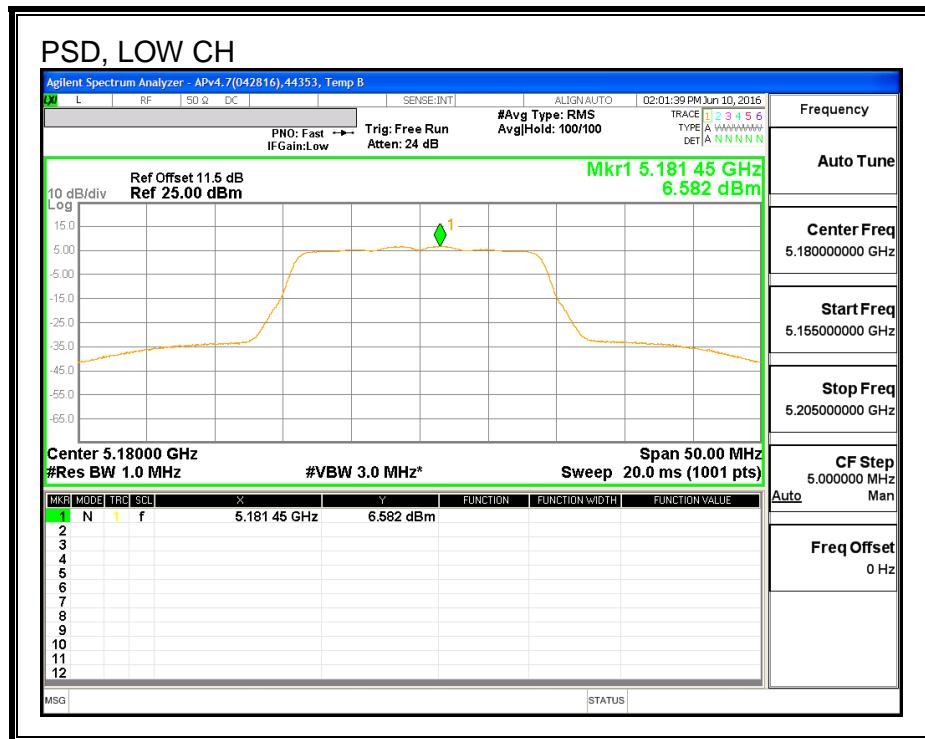
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

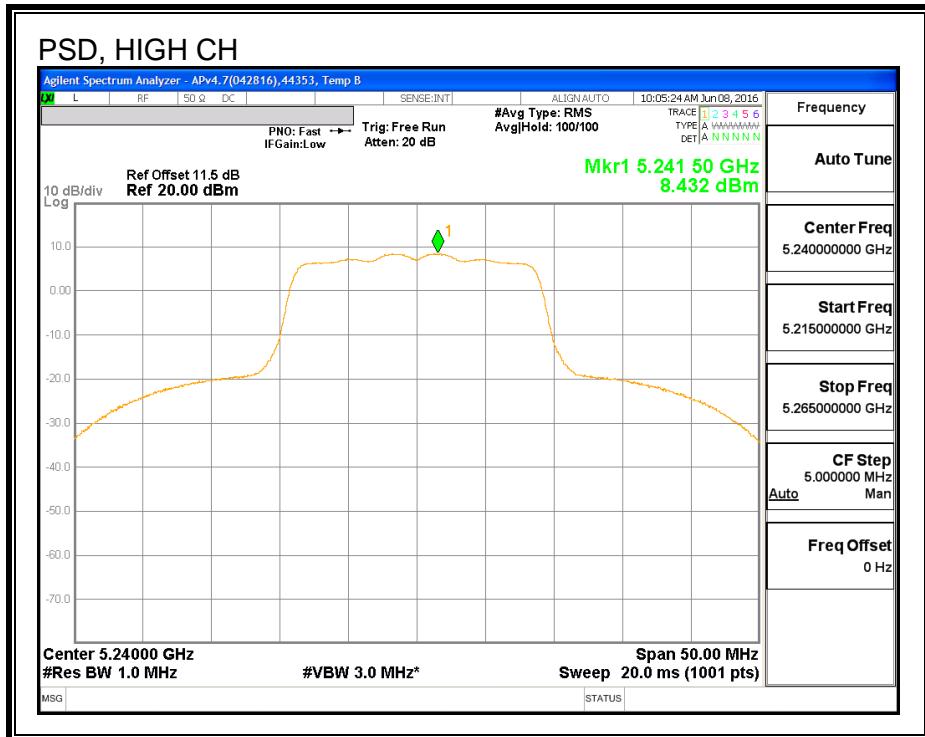
Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.49	17.49	24.00	-6.51
Mid	5200	19.40	19.40	24.00	-4.60
High	5240	19.35	19.35	24.00	-4.65

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.58	6.58	11.00	-4.42
Mid	5200	8.46	8.46	11.00	-2.54
High	5240	8.43	8.43	11.00	-2.57

PSD



7.2. 802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND

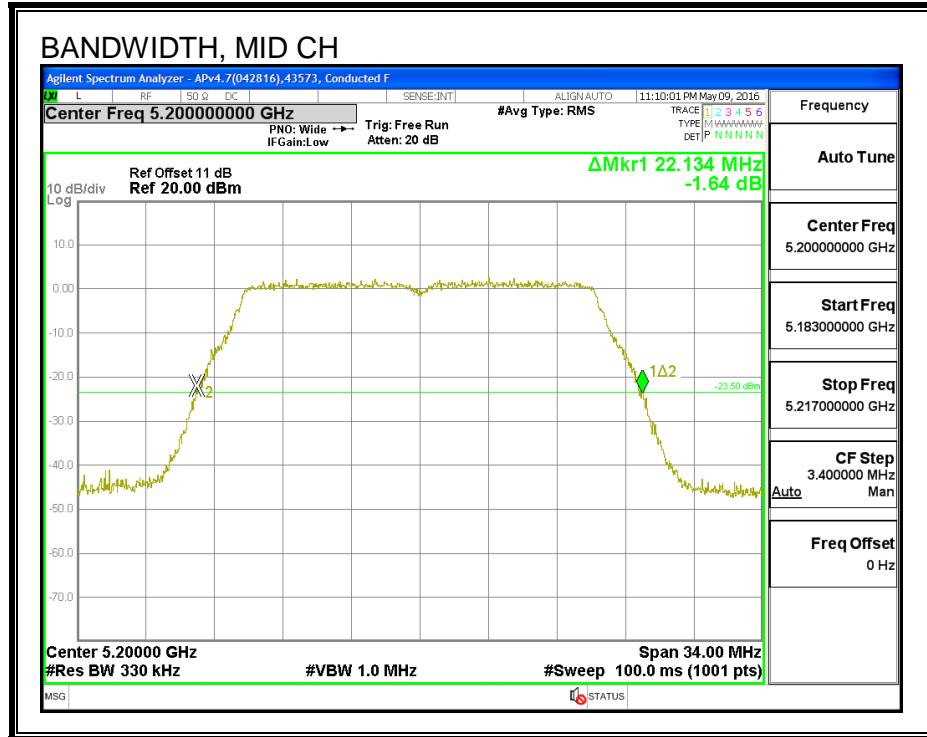
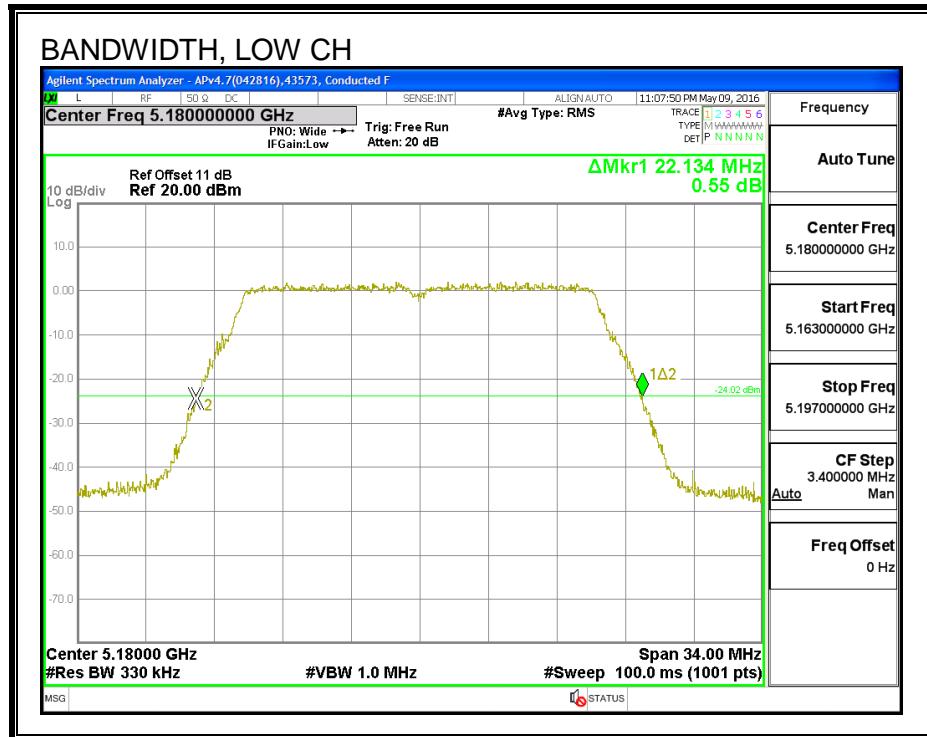
7.2.1. 26 dB BANDWIDTH

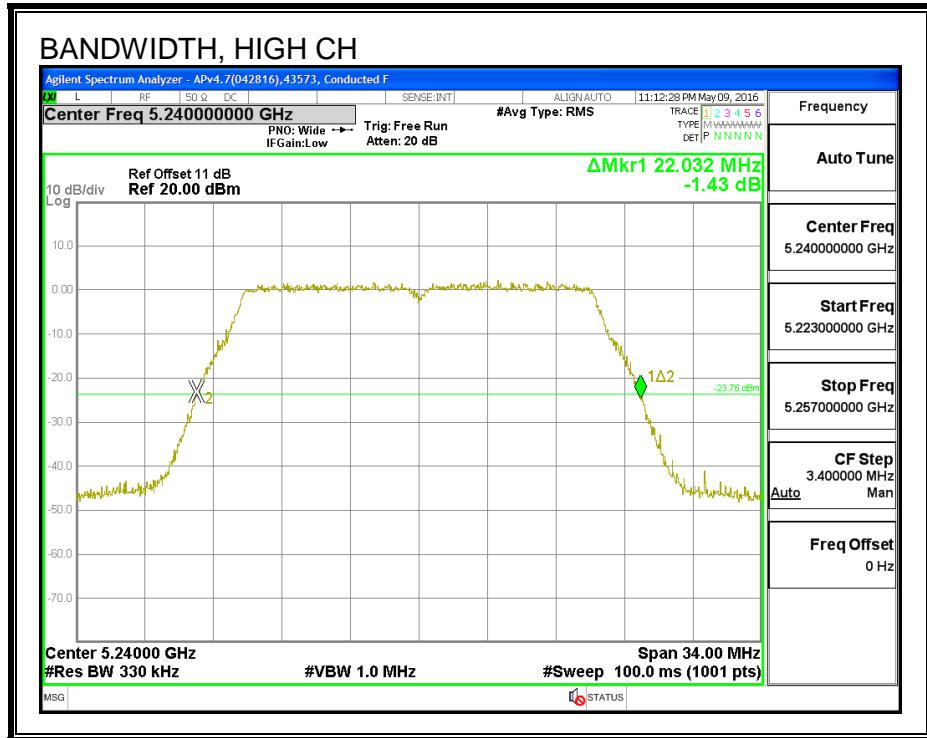
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.13
Mid	5200	22.13
High	5240	22.03

26 dB BANDWIDTH



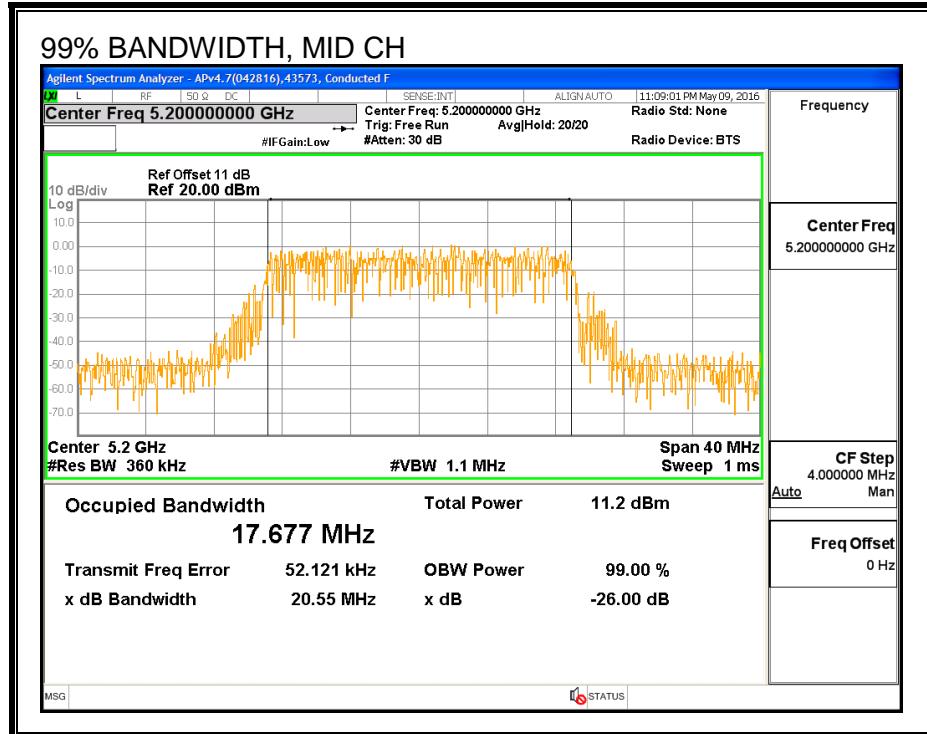
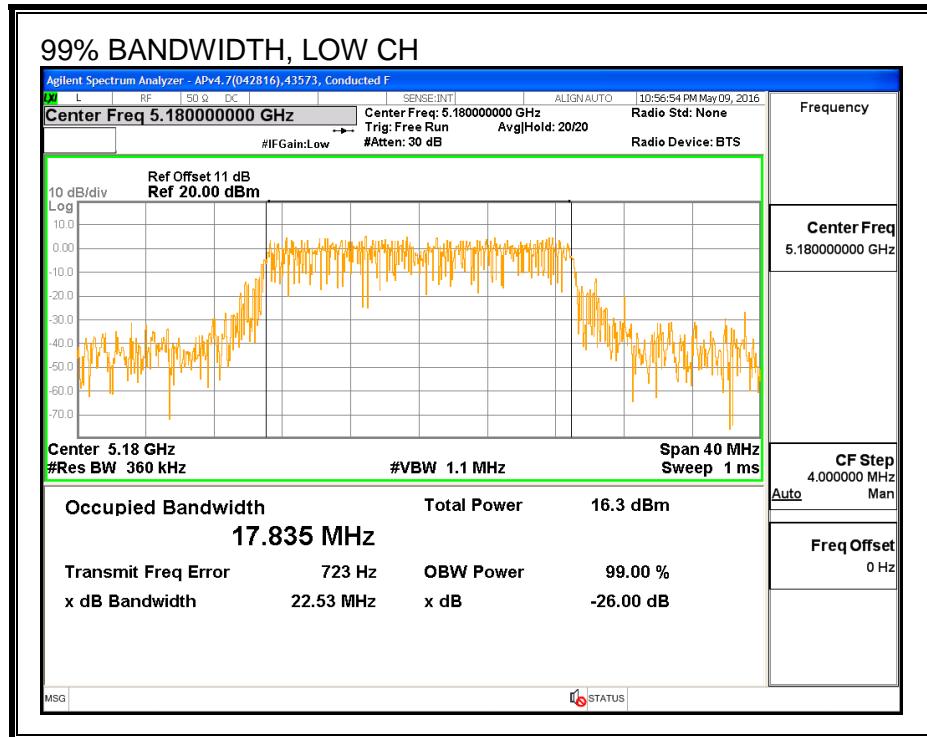
7.2.2. 99% BANDWIDTH

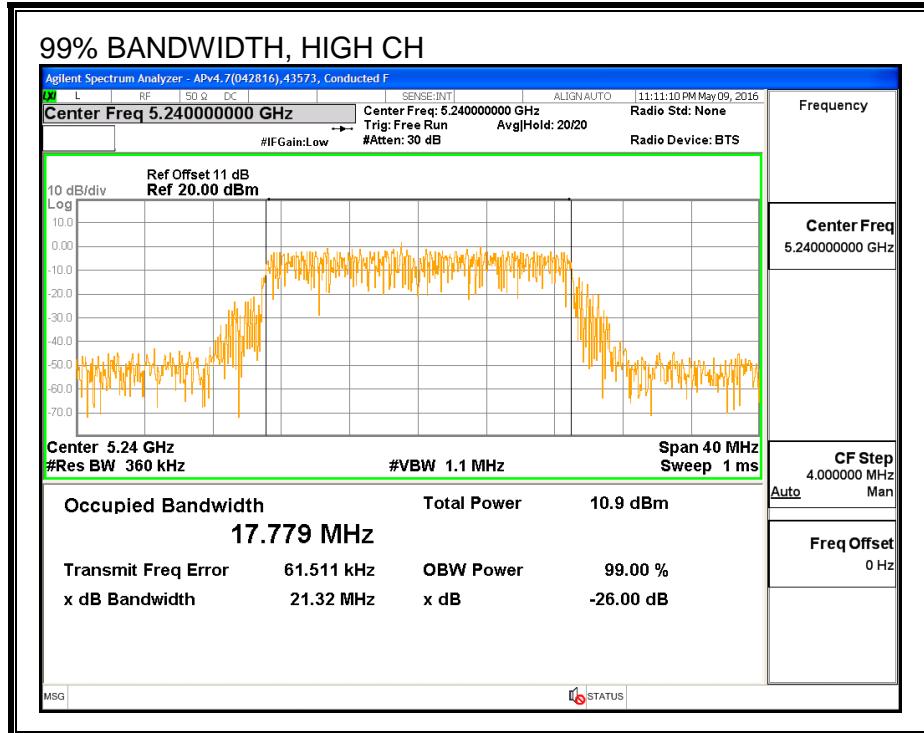
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.835
Mid	5200	17.677
High	5240	17.779

99% BANDWIDTH



7.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	17.37
Mid	5200	18.87
High	5240	18.75

7.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-6.01	-6.01	24.00	11.00
Mid	5200	-6.01	-6.01	24.00	11.00
High	5240	-6.01	-6.01	24.00	11.00

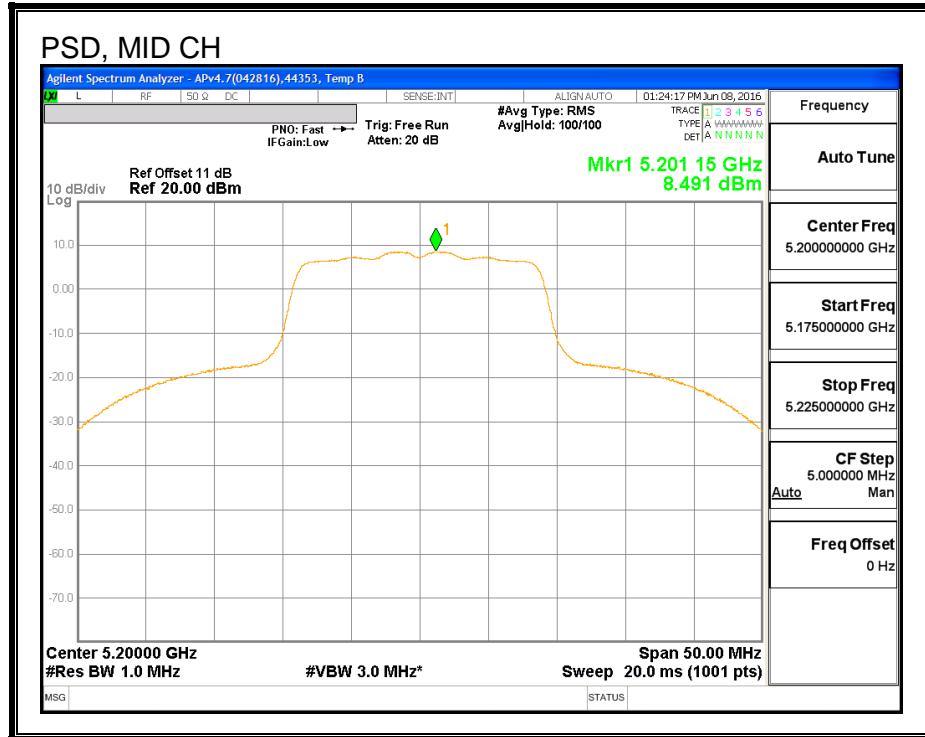
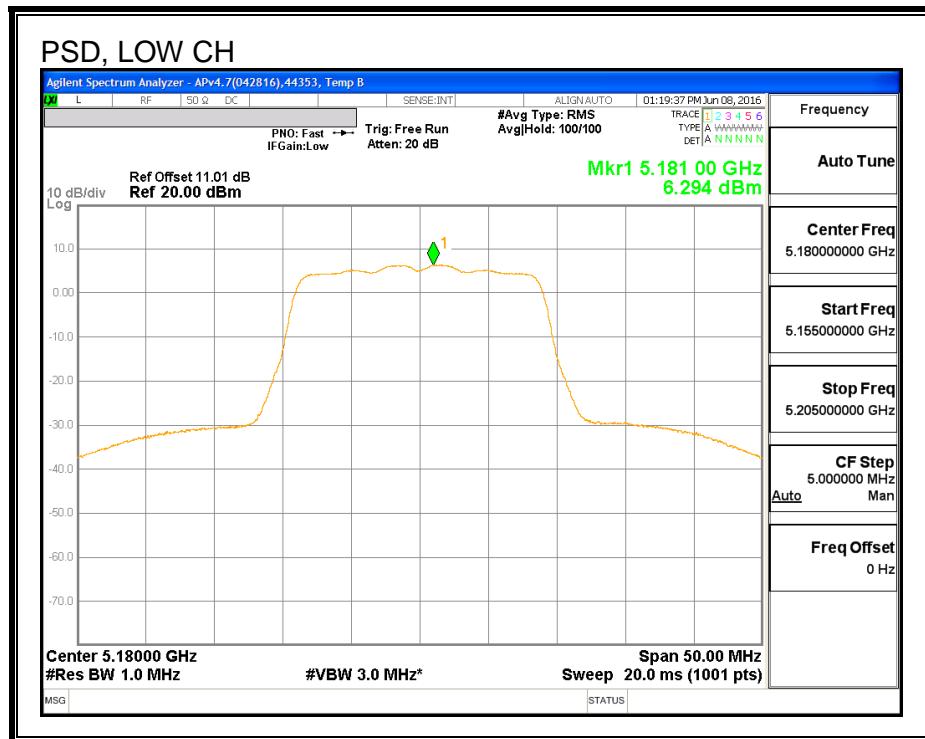
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

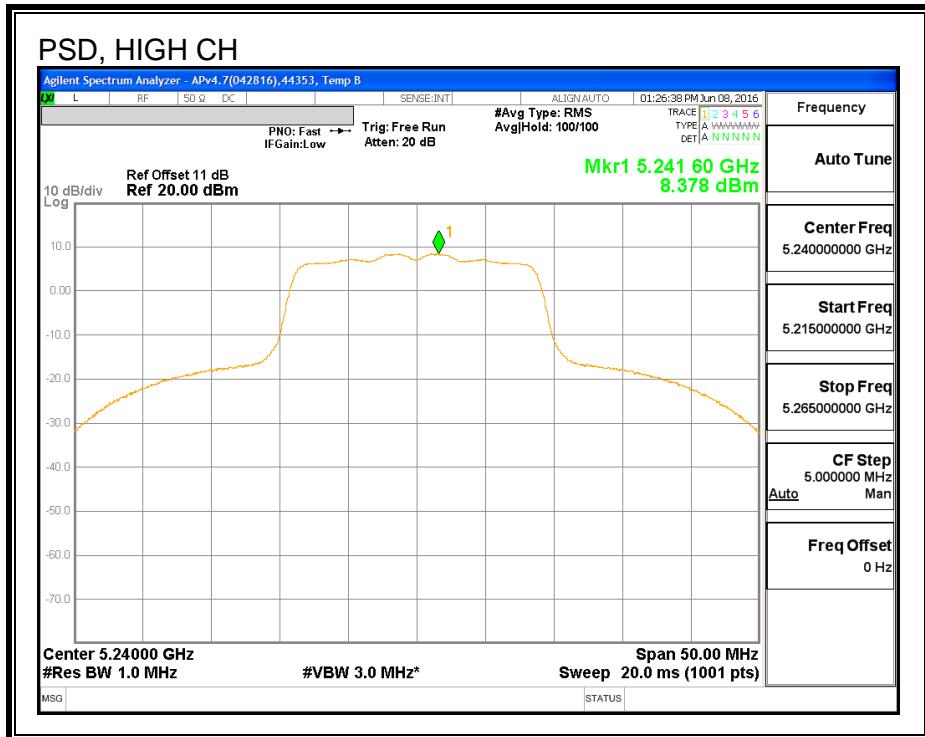
Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.37	17.37	24.00	-6.63
Mid	5200	18.87	18.87	24.00	-5.13
High	5240	18.75	18.75	24.00	-5.25

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.29	6.29	11.00	-4.71
Mid	5200	8.49	8.49	11.00	-2.51
High	5240	8.38	8.38	11.00	-2.62

PSD



7.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND

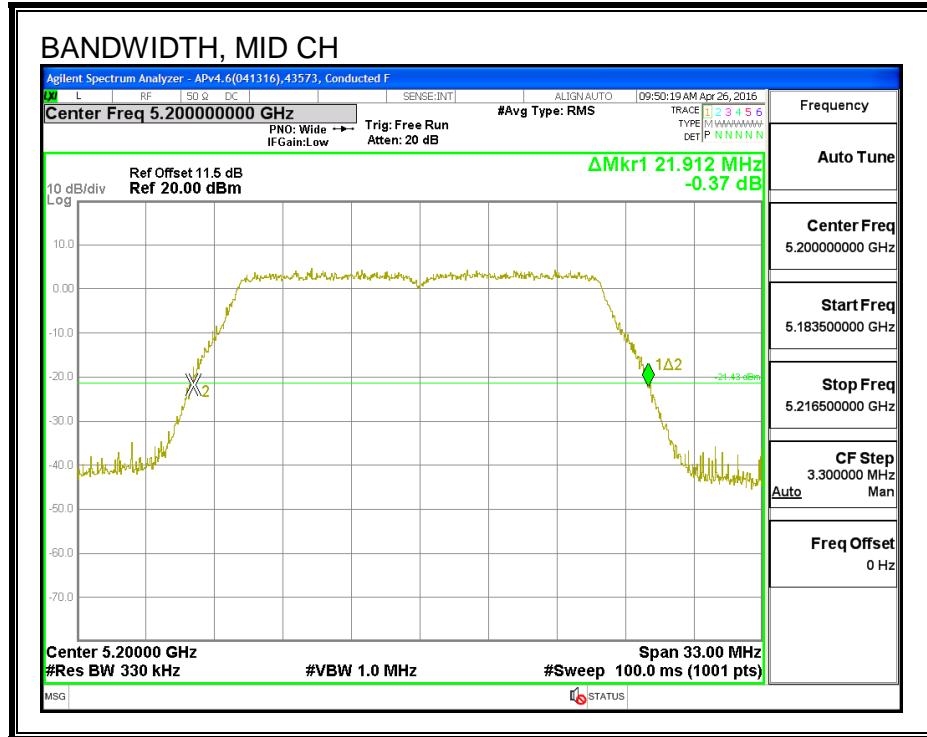
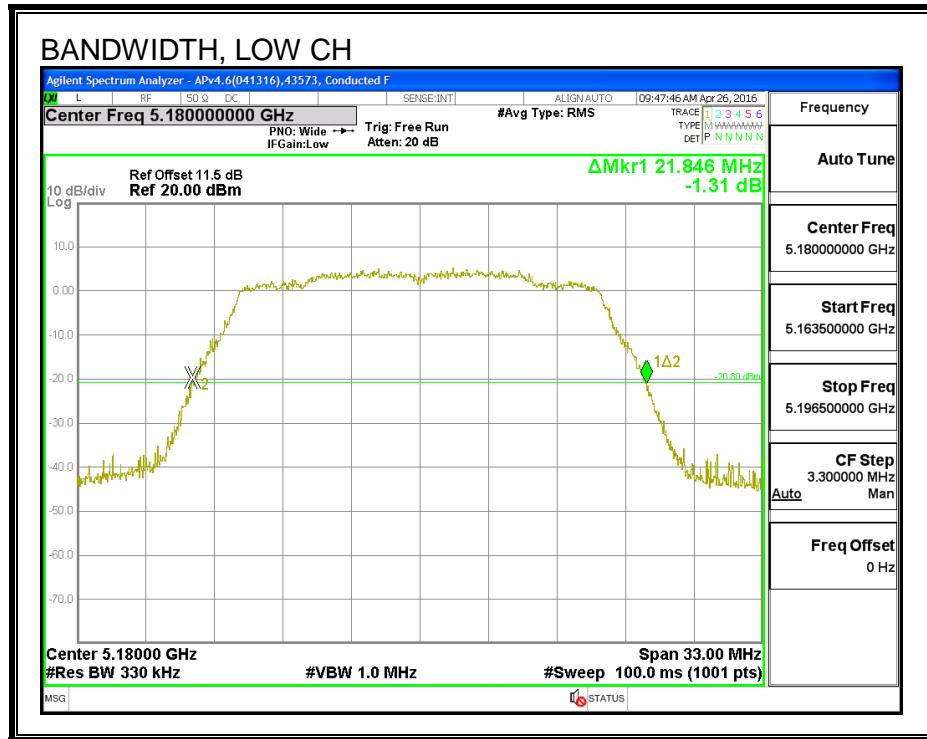
7.3.1. 26 dB BANDWIDTH

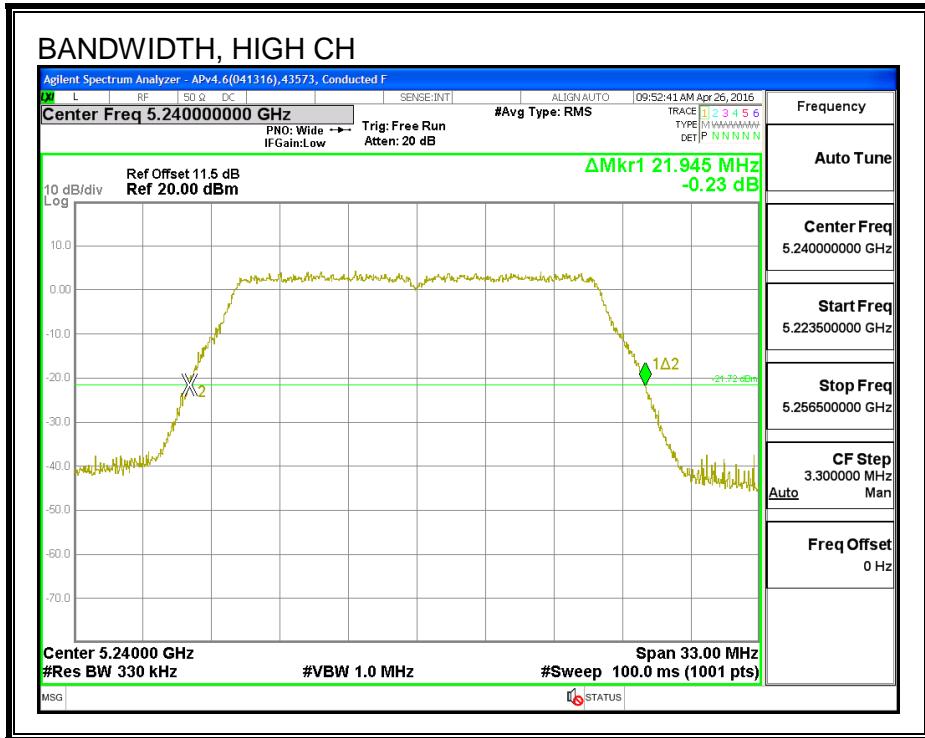
LIMITS

None; for reporting purposes only.

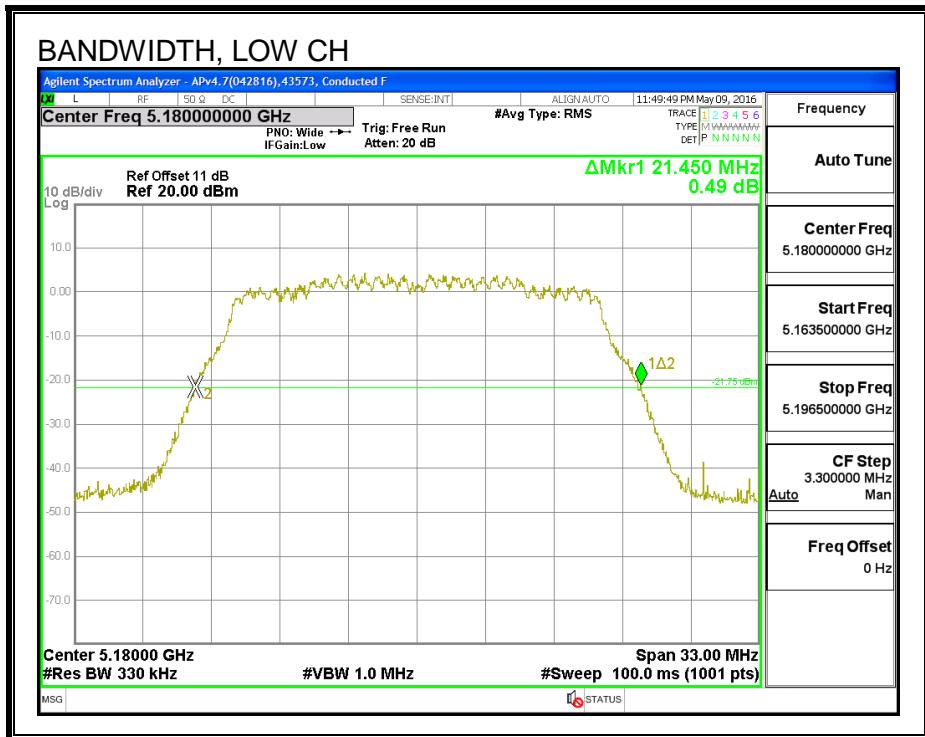
RESULTS

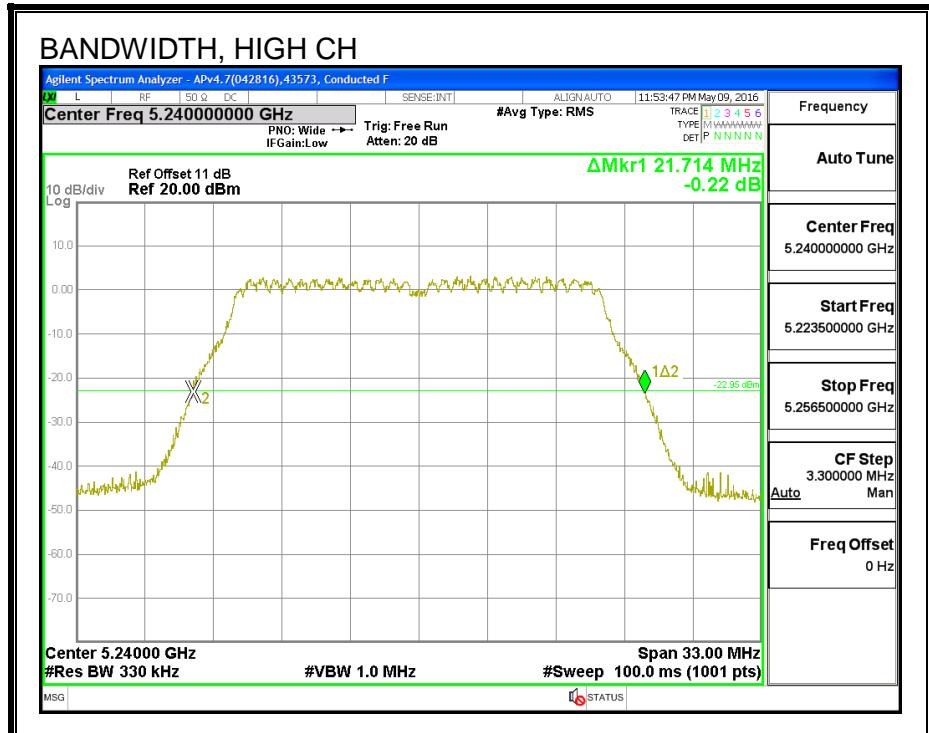
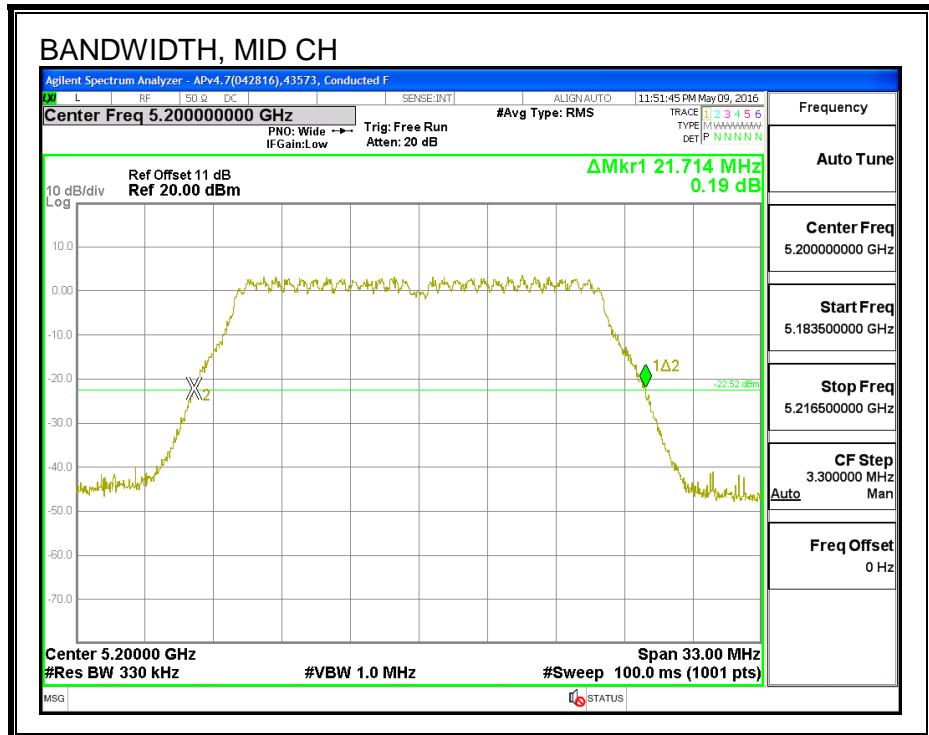
Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	21.85	21.45
Mid	5200	21.91	21.71
High	5240	21.95	21.71

26 DB BANDWIDTH, CHAIN 0



26 DB BANDWIDTH, CHAIN 1





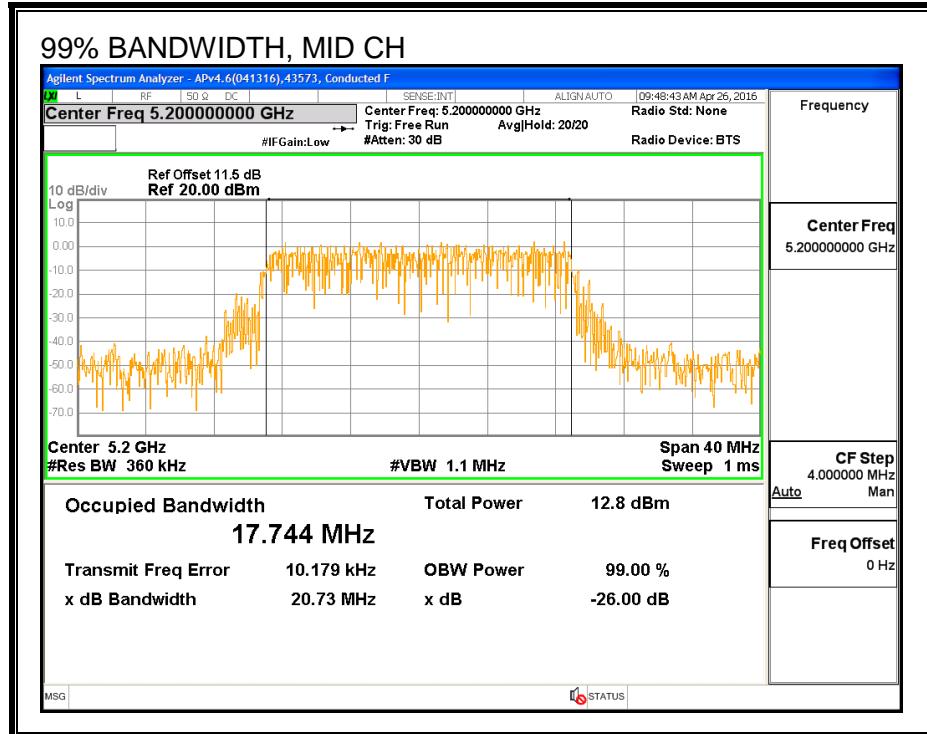
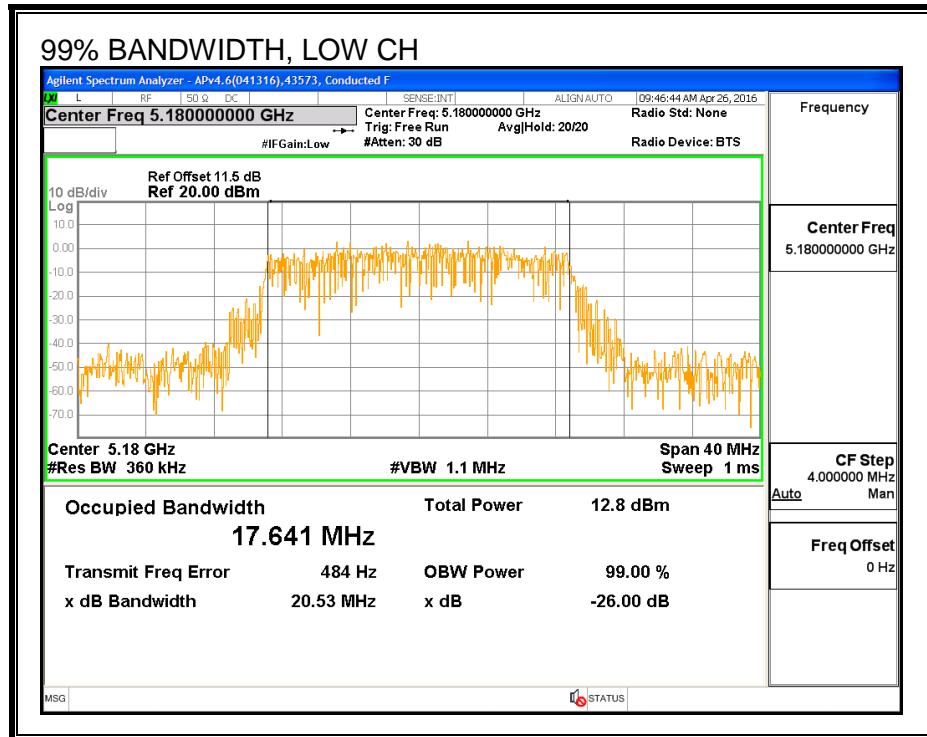
7.3.2. 99% BANDWIDTH

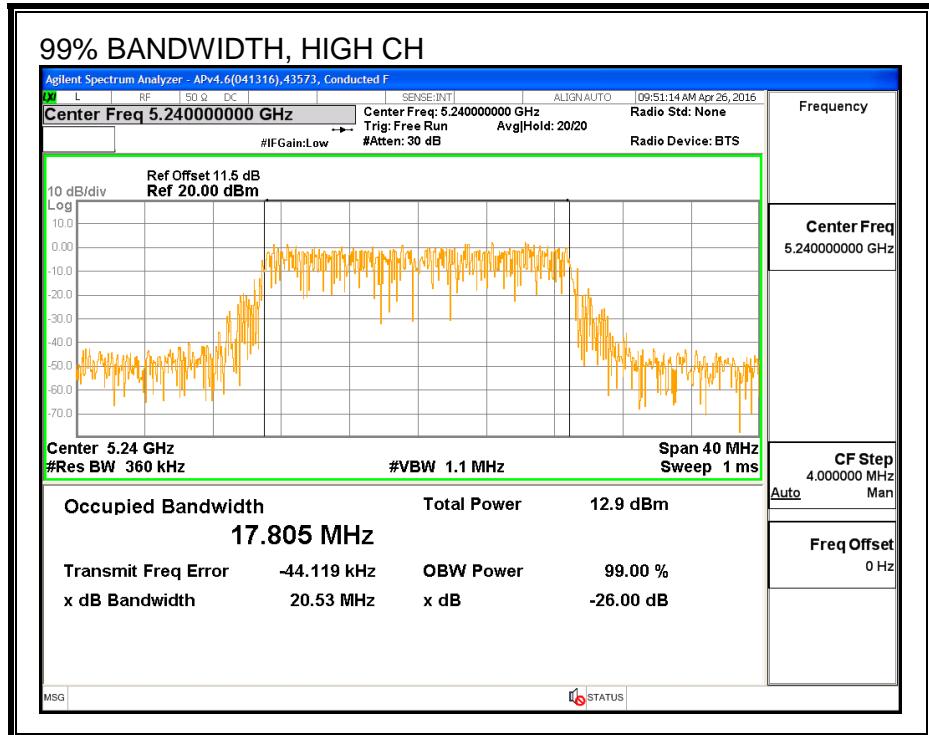
LIMITS

None; for reporting purposes only.

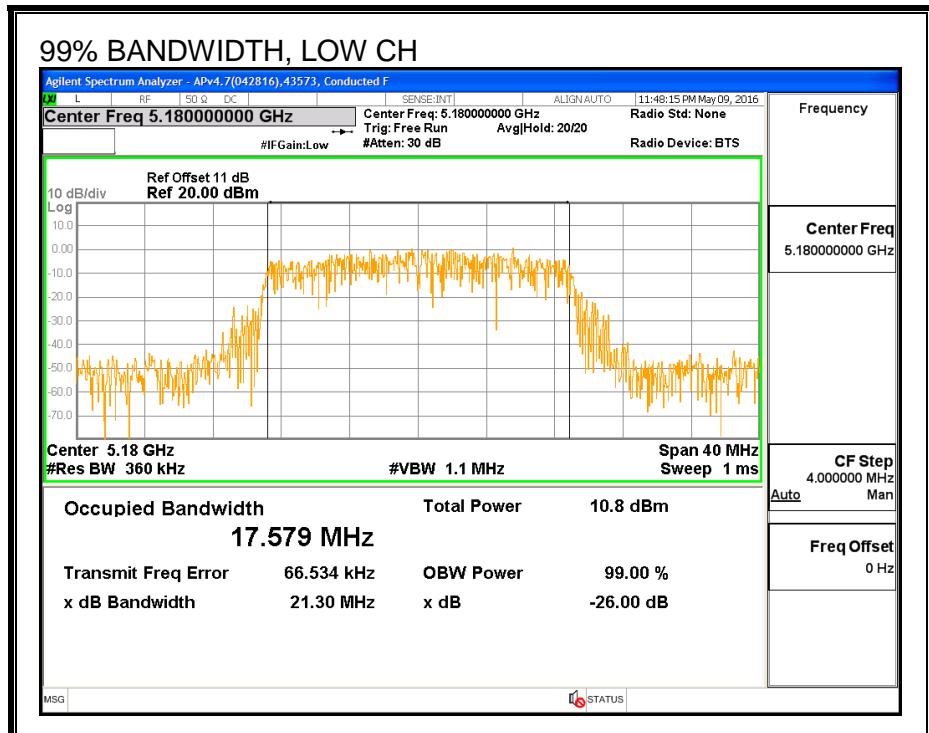
RESULTS

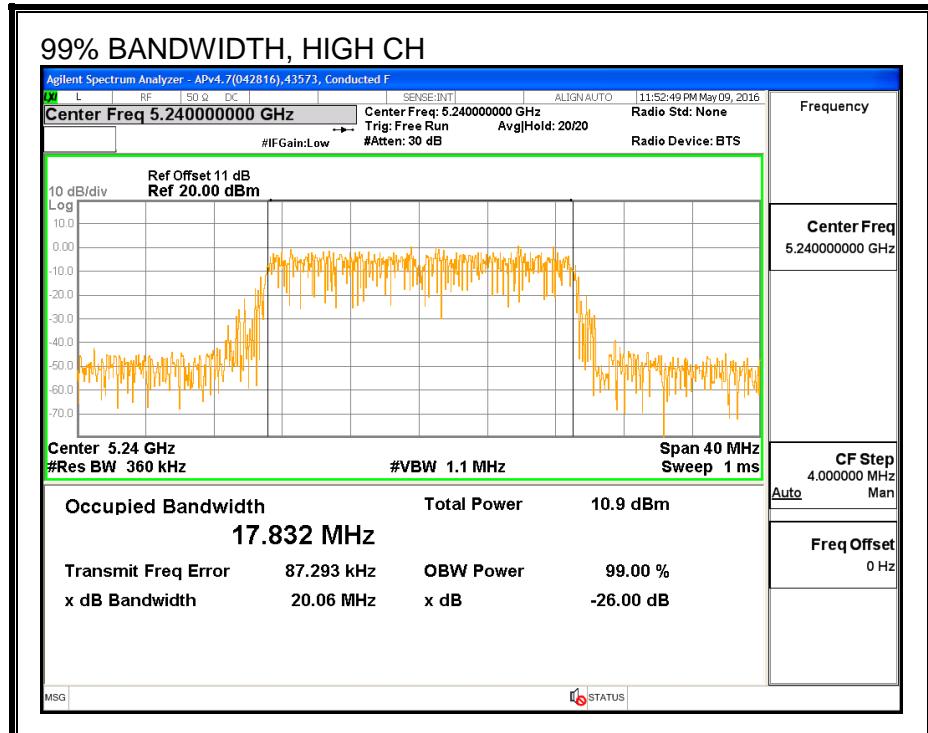
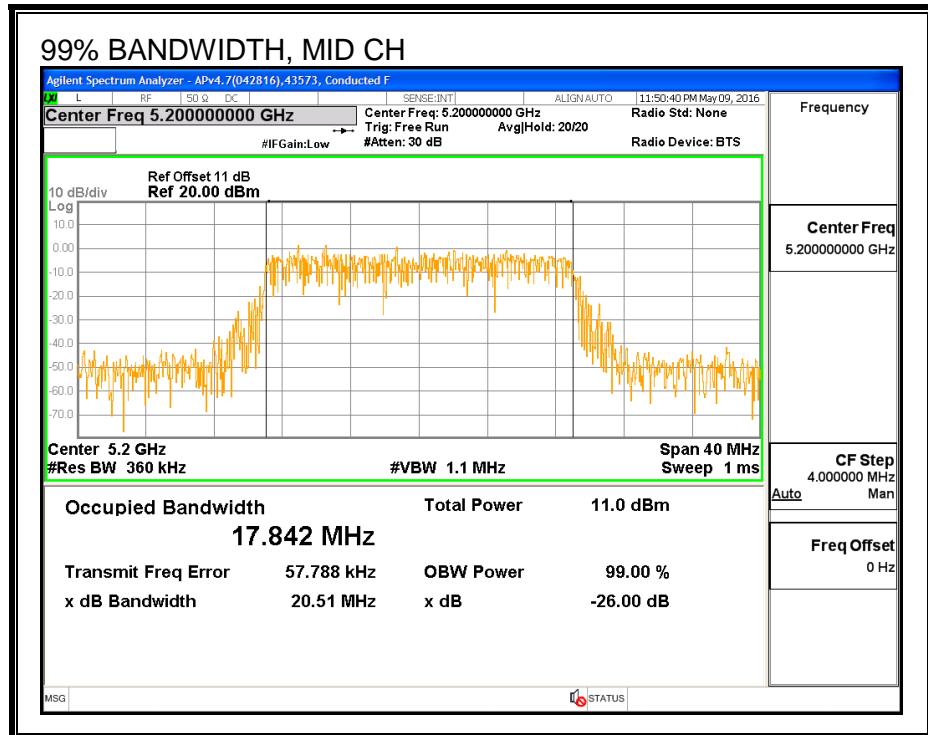
Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.641	17.579
Mid	5200	17.744	17.842
High	5240	17.805	17.832

99% BANDWIDTH, CHAIN 0



99% BANDWIDTH, CHAIN 1





7.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	16.93	16.94	19.95
Mid	5200	16.90	16.94	19.93
High	5240	16.94	16.92	19.94

7.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-4.74	-6.01	-5.33

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-4.74	-6.01	-2.34

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-5.33	-2.34	24.00	11.00
Mid	5200	-5.33	-2.34	24.00	11.00
High	5240	-5.33	-2.34	24.00	11.00

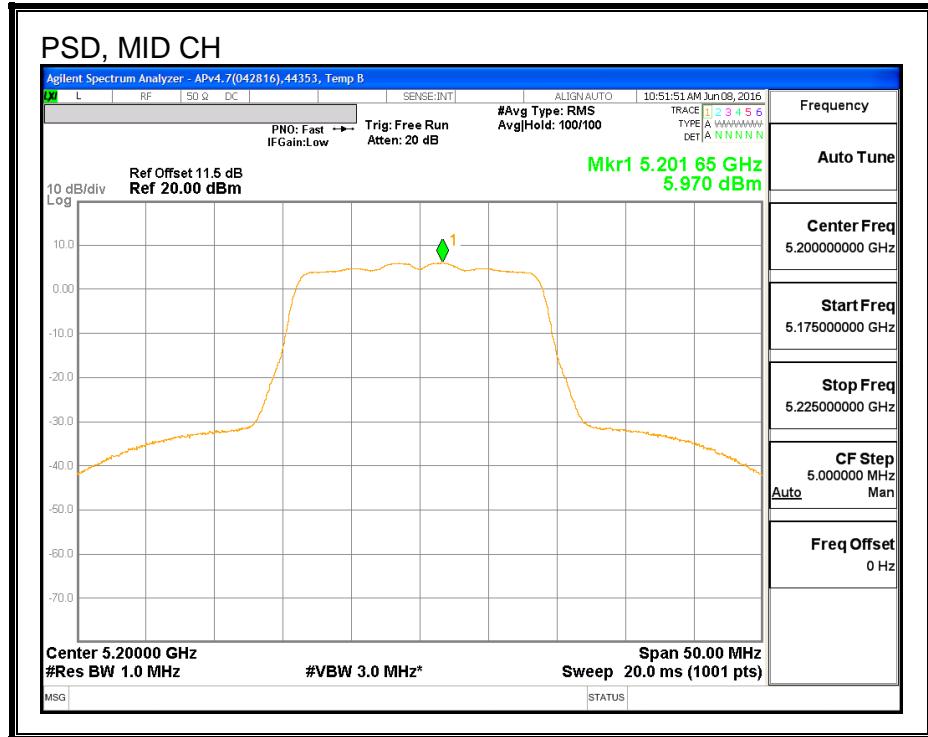
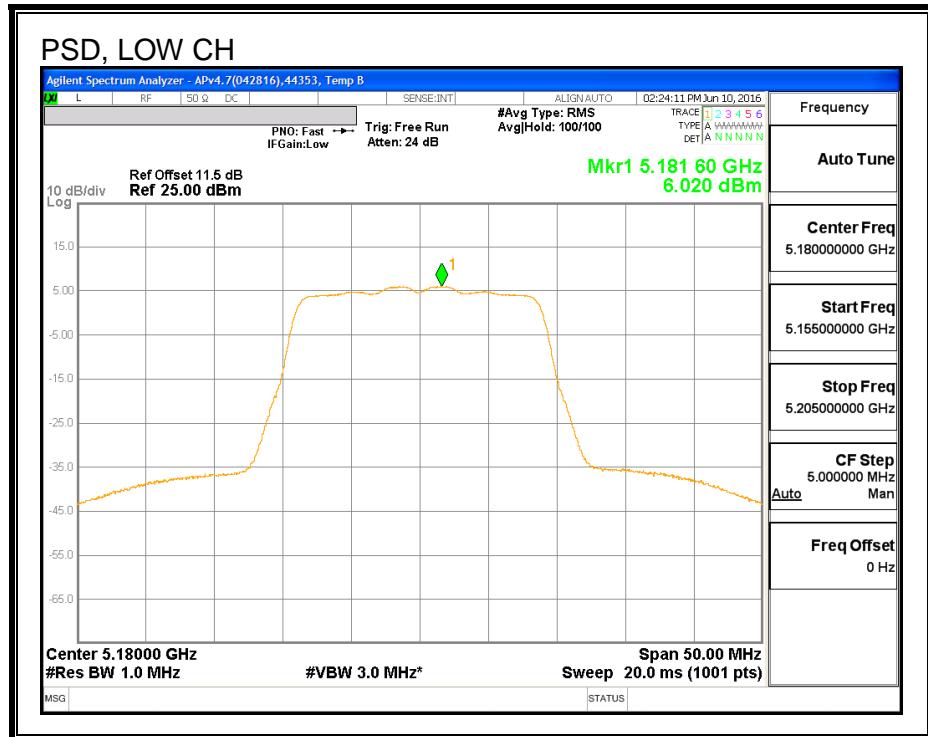
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

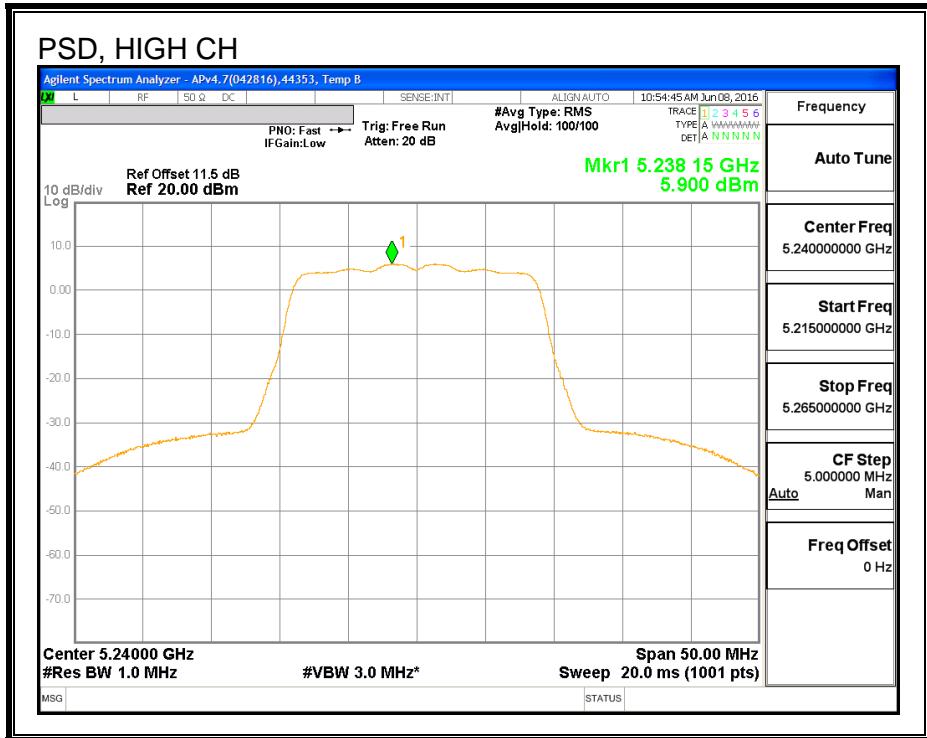
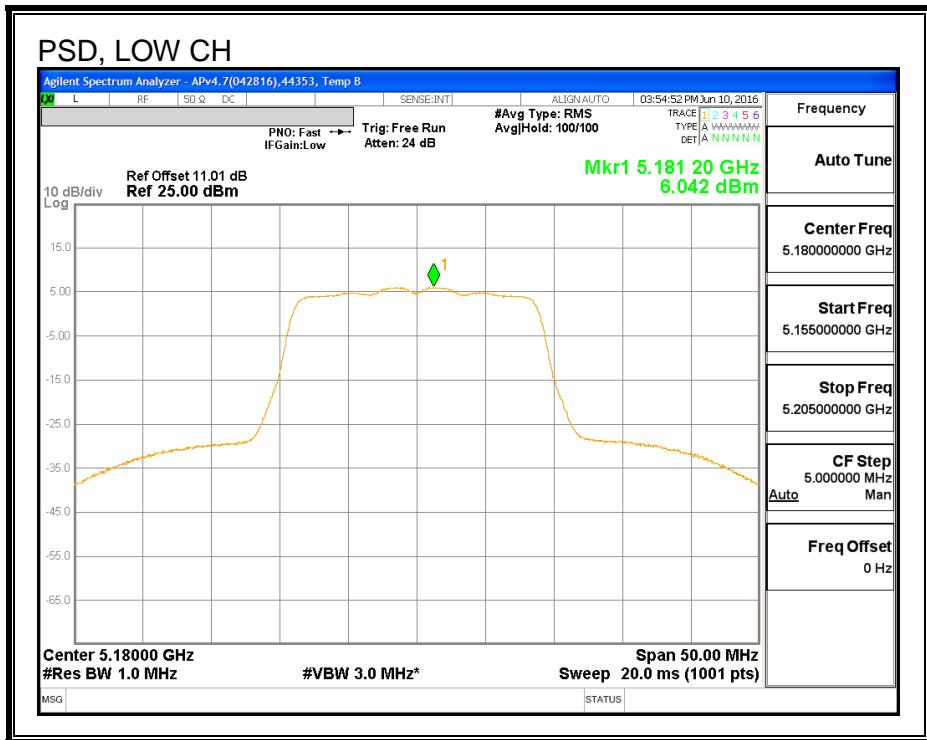
Output Power Results

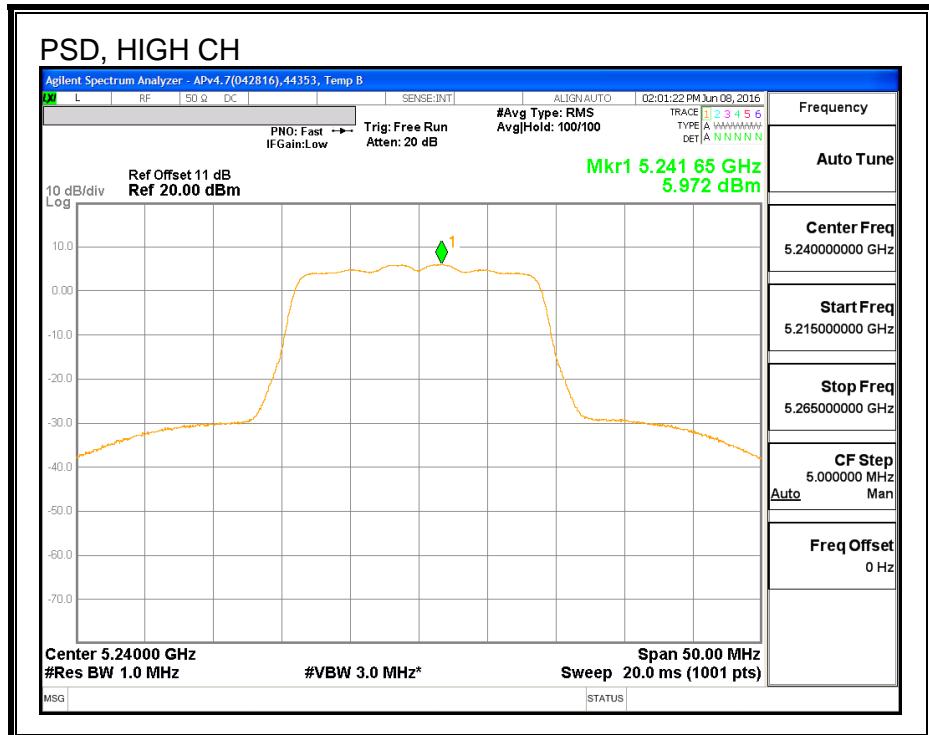
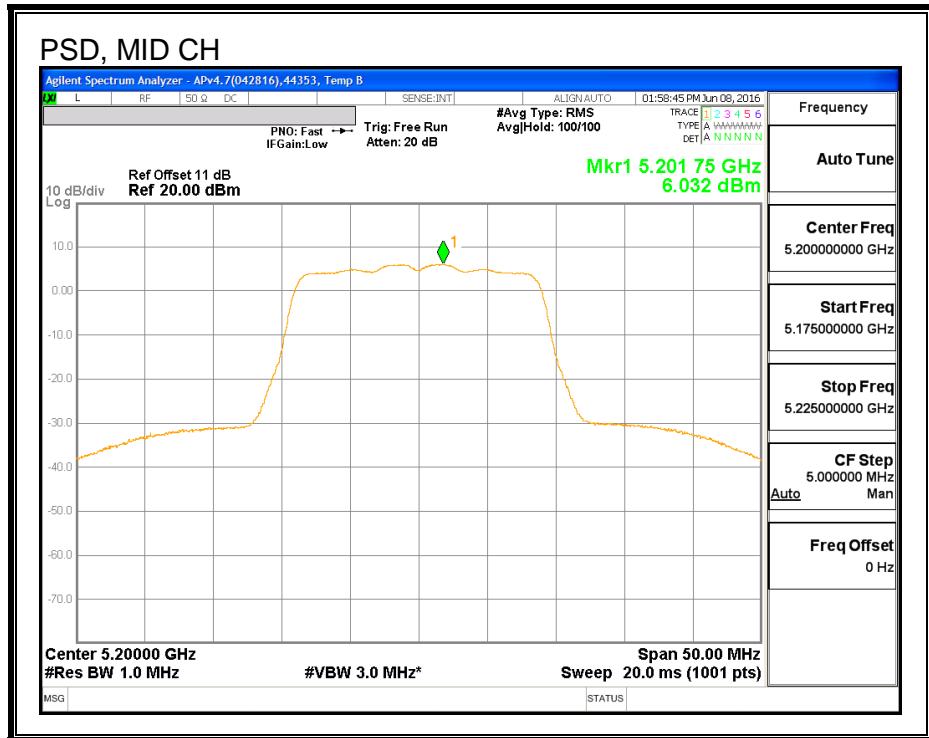
Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.93	16.94	19.95	24.00	-4.05
Mid	5200	16.90	16.94	19.93	24.00	-4.07
High	5240	16.94	16.92	19.94	24.00	-4.06

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.02	6.04	9.04	11.00	-1.96
Mid	5200	5.97	6.03	9.01	11.00	-1.99
High	5240	5.90	5.97	8.95	11.00	-2.05

PSD, CHAIN 0

**PSD, CHAIN 1**

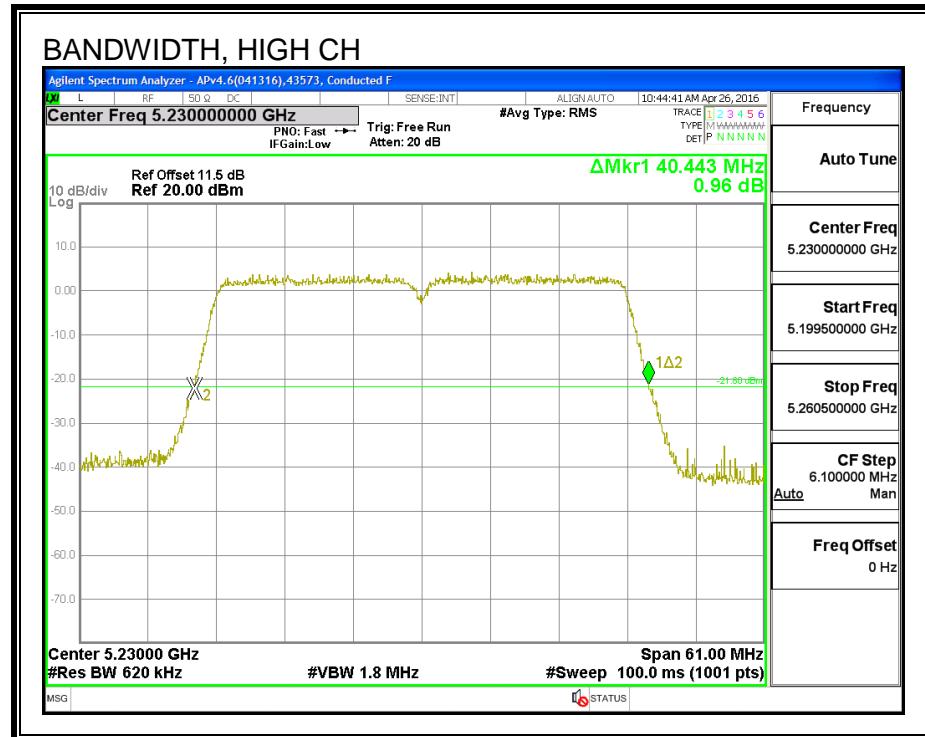
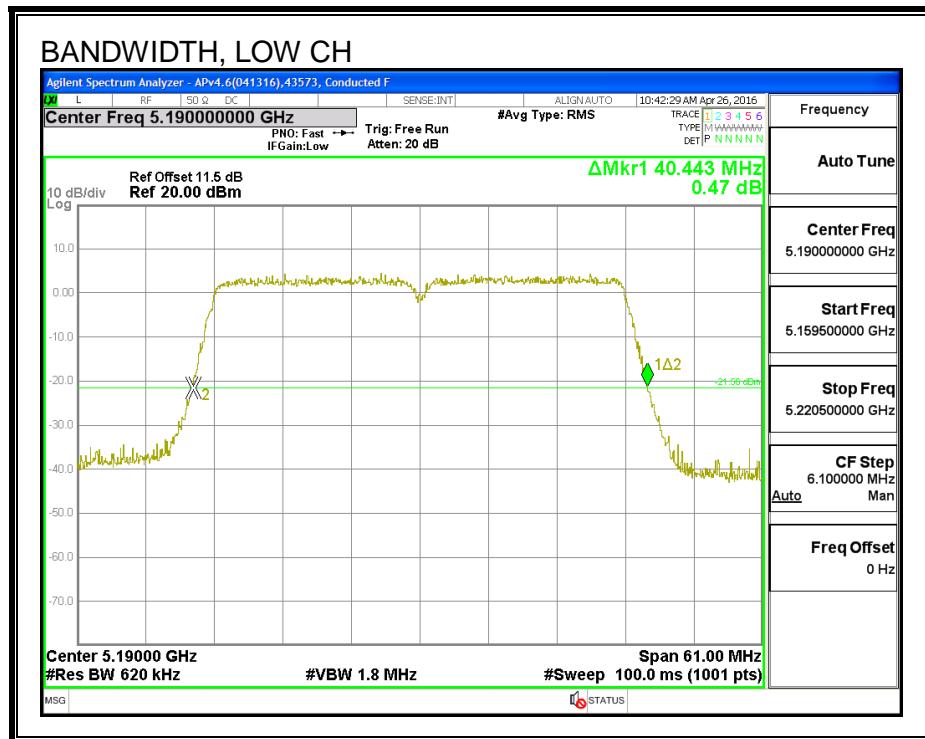


7.4. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND**7.4.1. 26 dB BANDWIDTH****LIMITS**

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.44
High	5230	40.44

26 dB BANDWIDTH

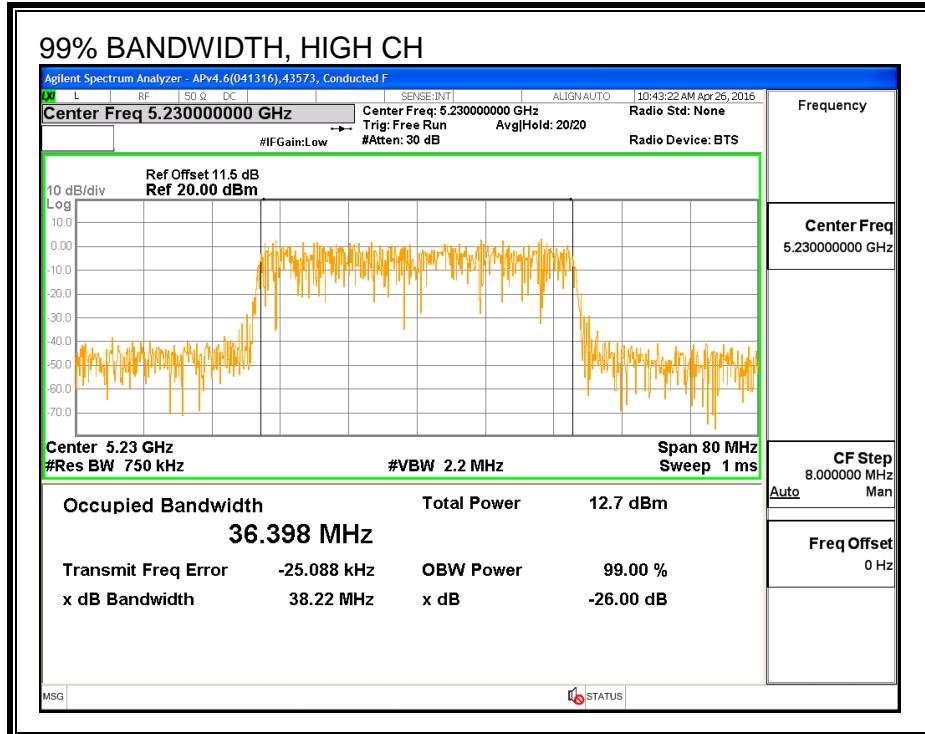
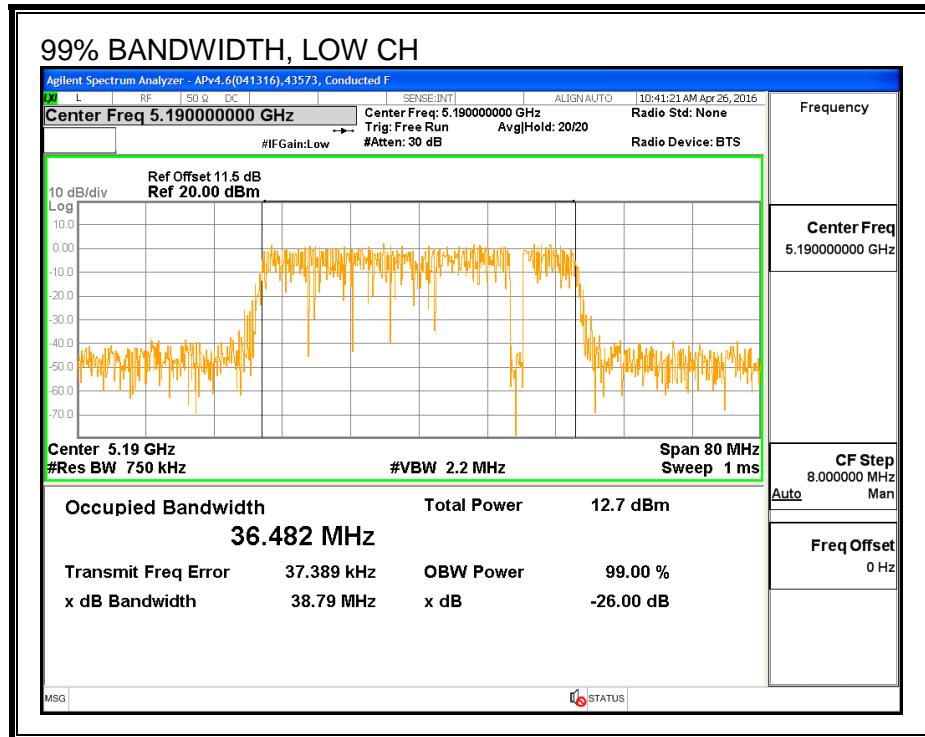
7.4.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.482
High	5230	36.398

99% BANDWIDTH

7.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	16.41
High	5230	18.93

7.4.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-4.74	-4.74	24.00	11.00
High	5230	-4.74	-4.74	24.00	11.00

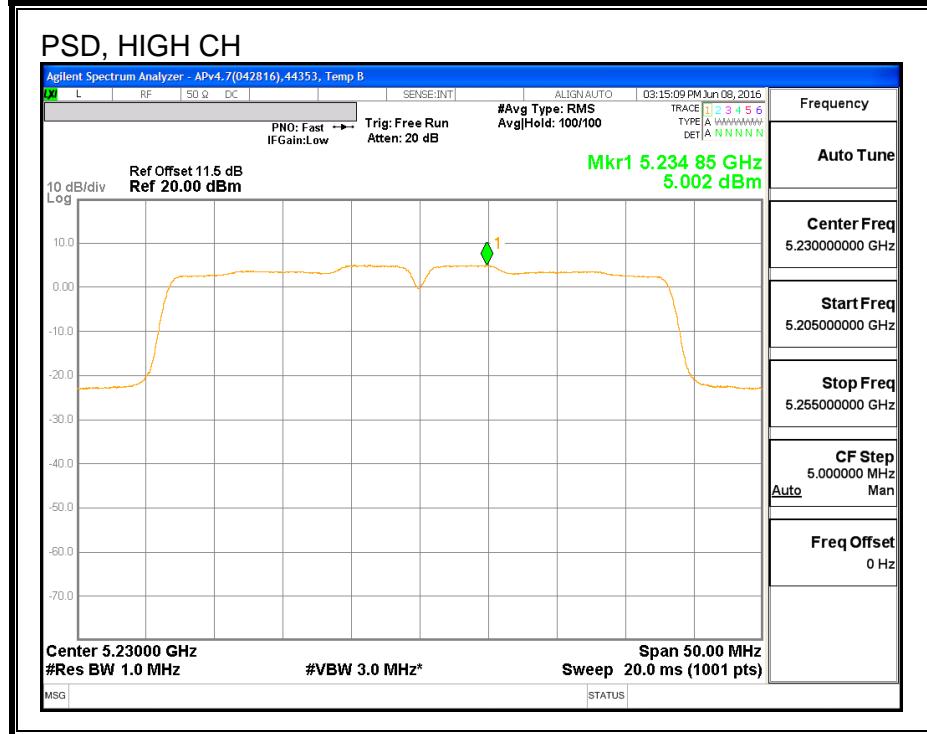
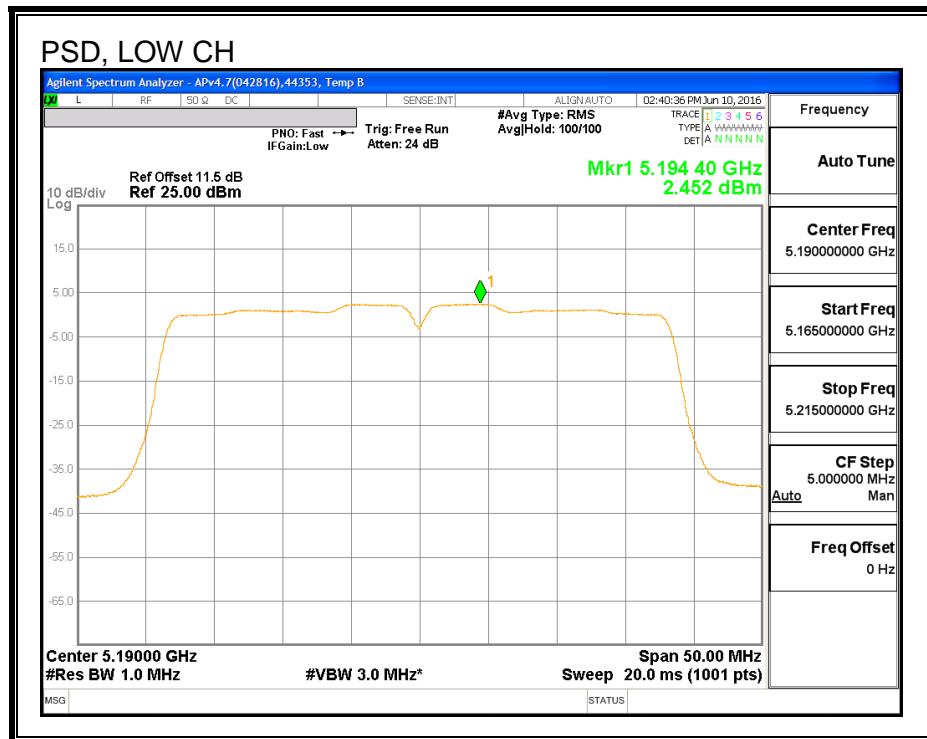
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	16.41	16.41	24.00	-7.59
High	5230	18.93	18.93	24.00	-5.07

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.45	2.45	11.00	-8.55
High	5230	5.00	5.00	11.00	-6.00

PSD

7.5. 802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND

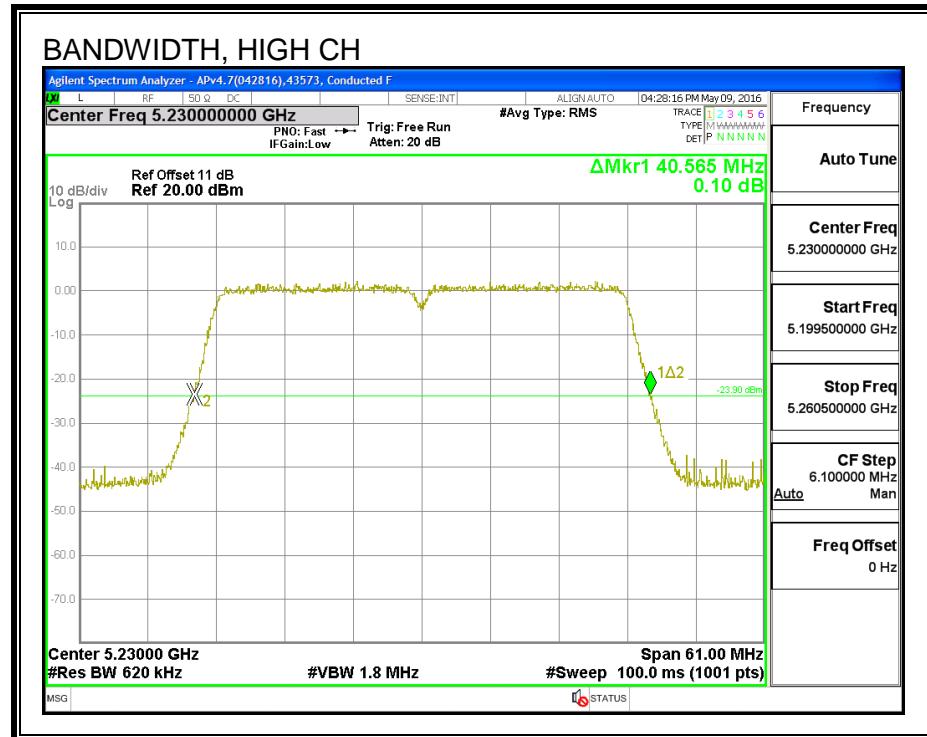
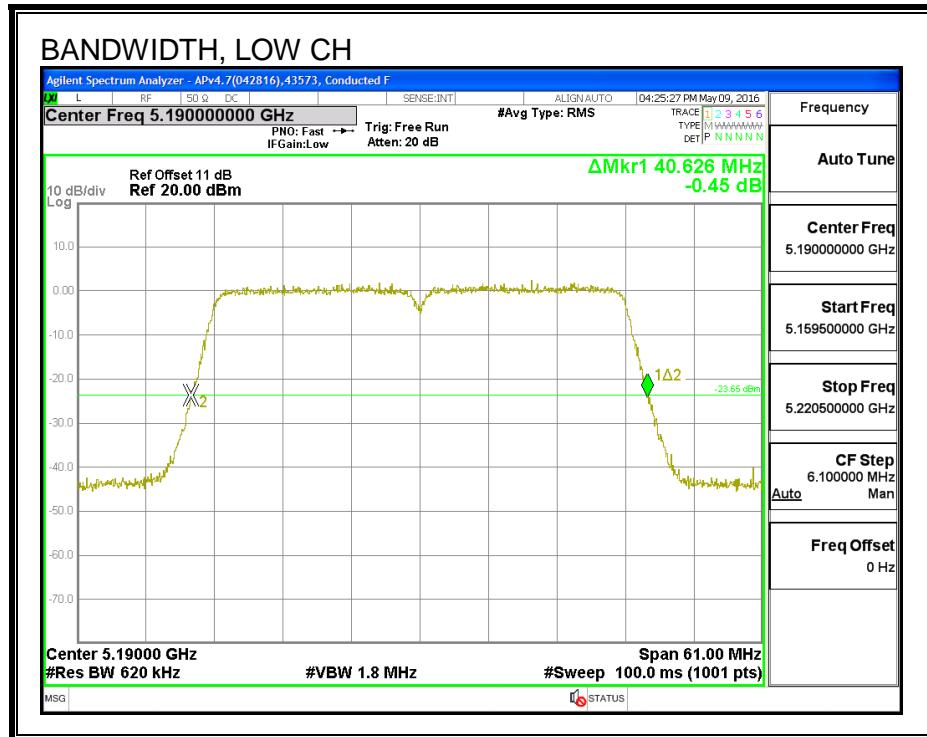
7.5.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.63
High	5230	40.57

26 dB BANDWIDTH

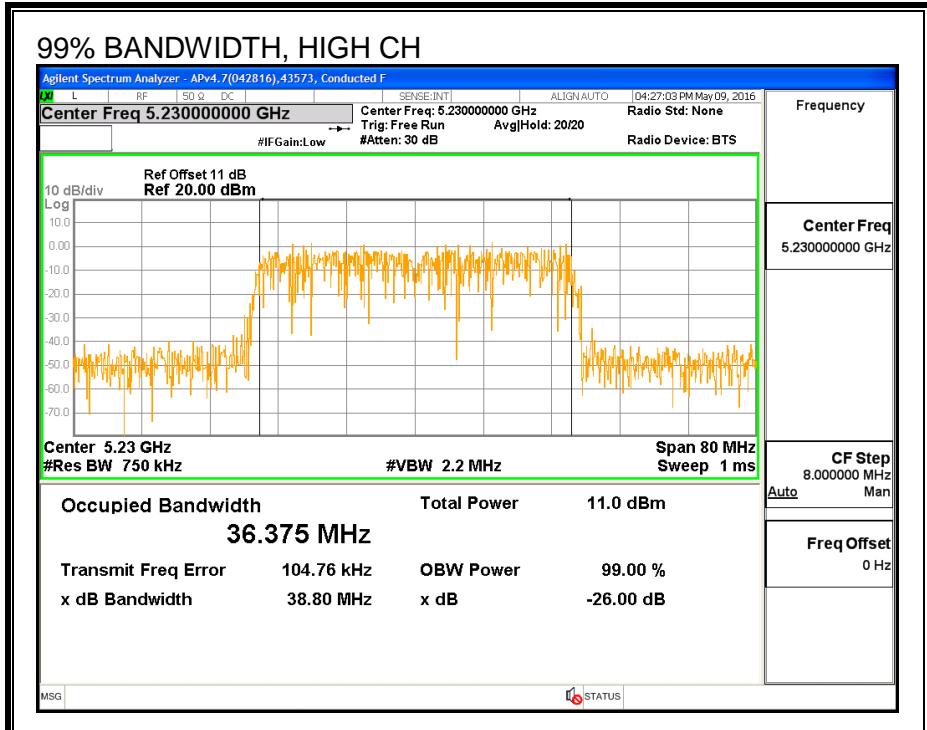
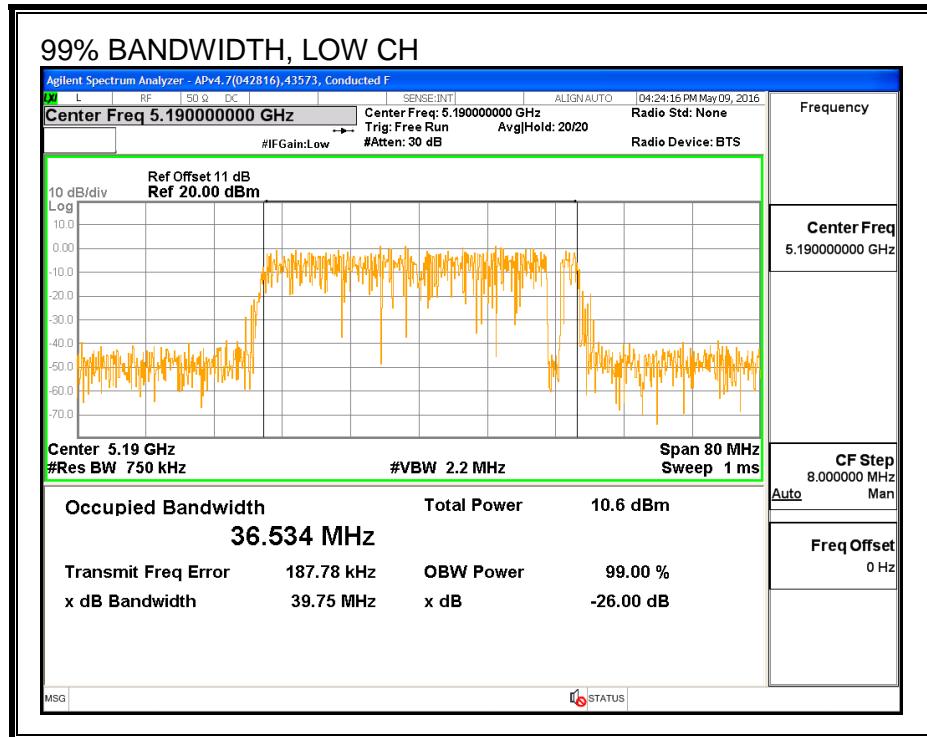
7.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.534
High	5230	36.375

99% BANDWIDTH

7.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	16.50
High	5230	18.94

7.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-6.01	-6.01	24.00	11.00
High	5230	-6.01	-6.01	24.00	11.00

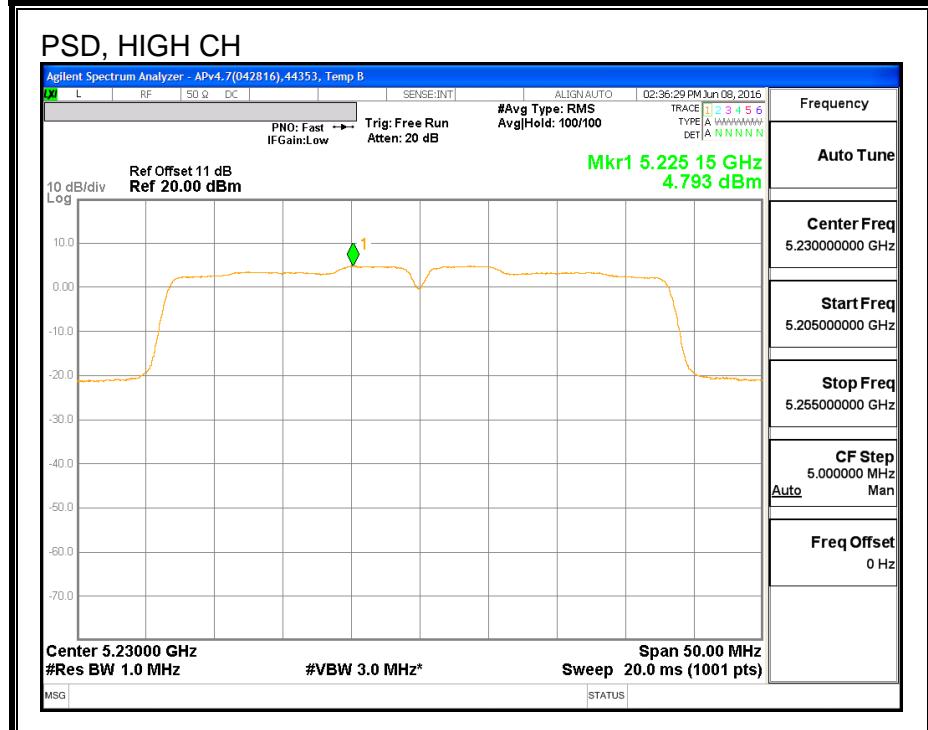
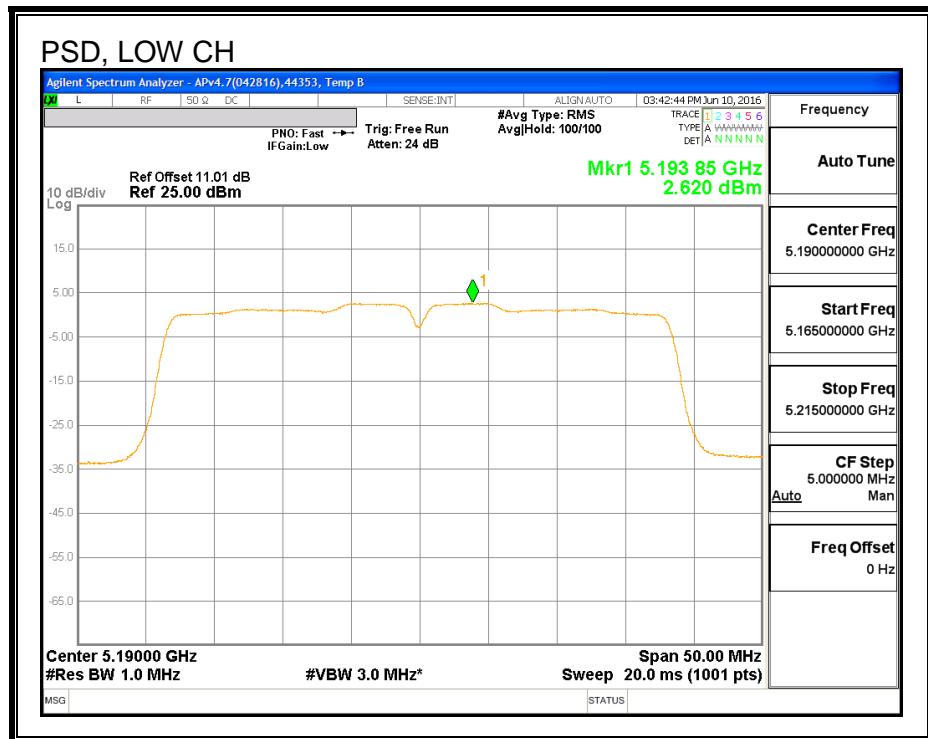
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	16.50	16.50	24.00	-7.50
High	5230	18.94	18.94	24.00	-5.06

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.62	2.62	11.00	-8.38
High	5230	4.79	4.79	11.00	-6.21

PSD

7.6. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND

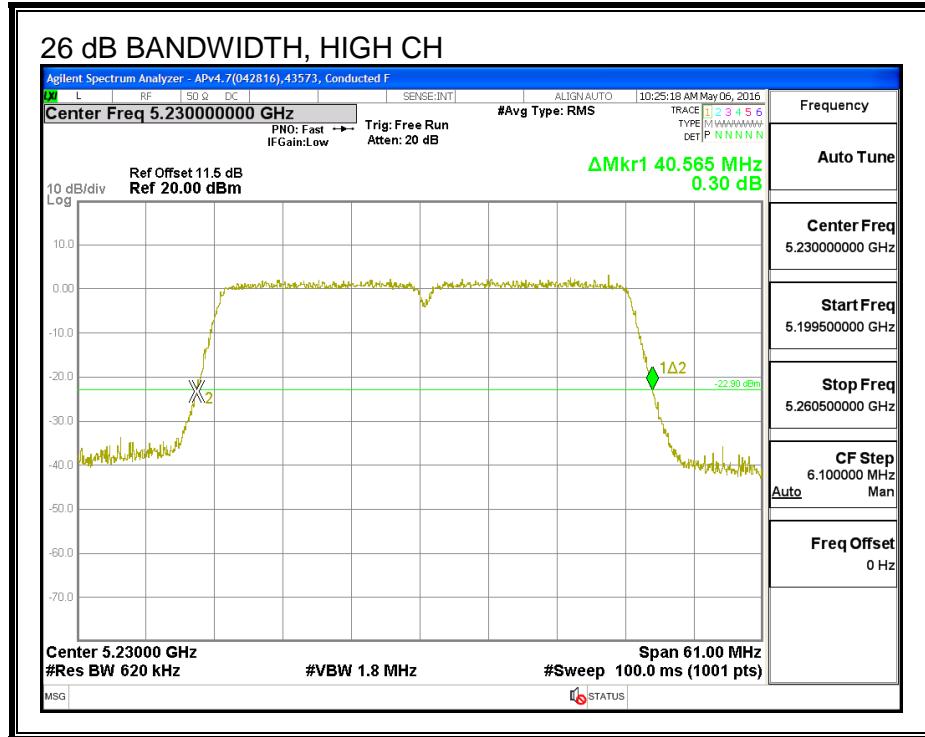
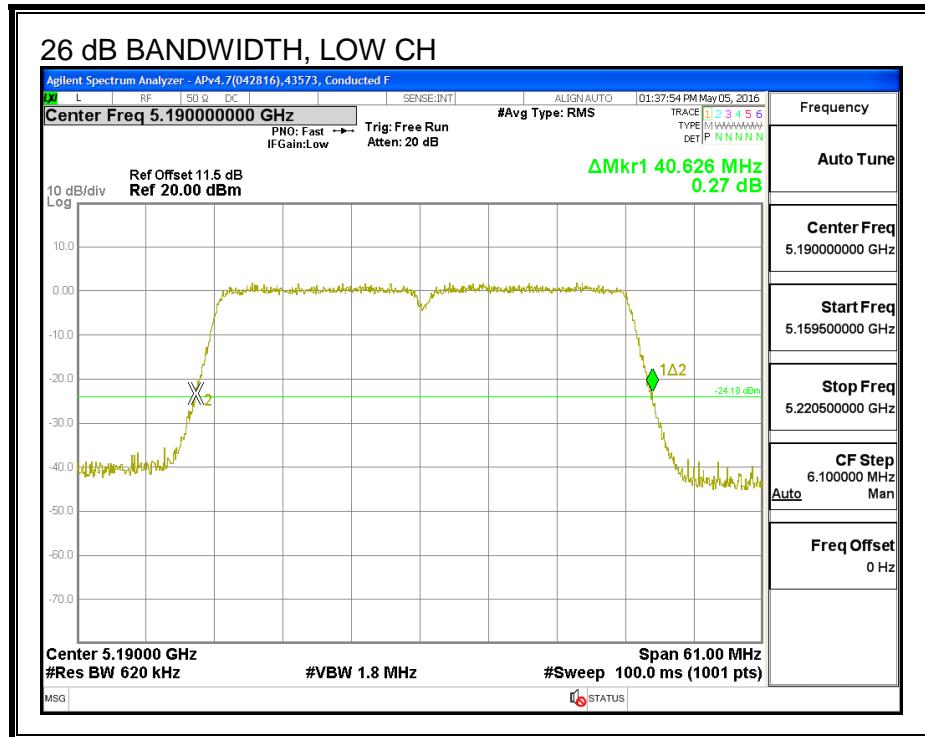
7.6.1. 26 dB BANDWIDTH

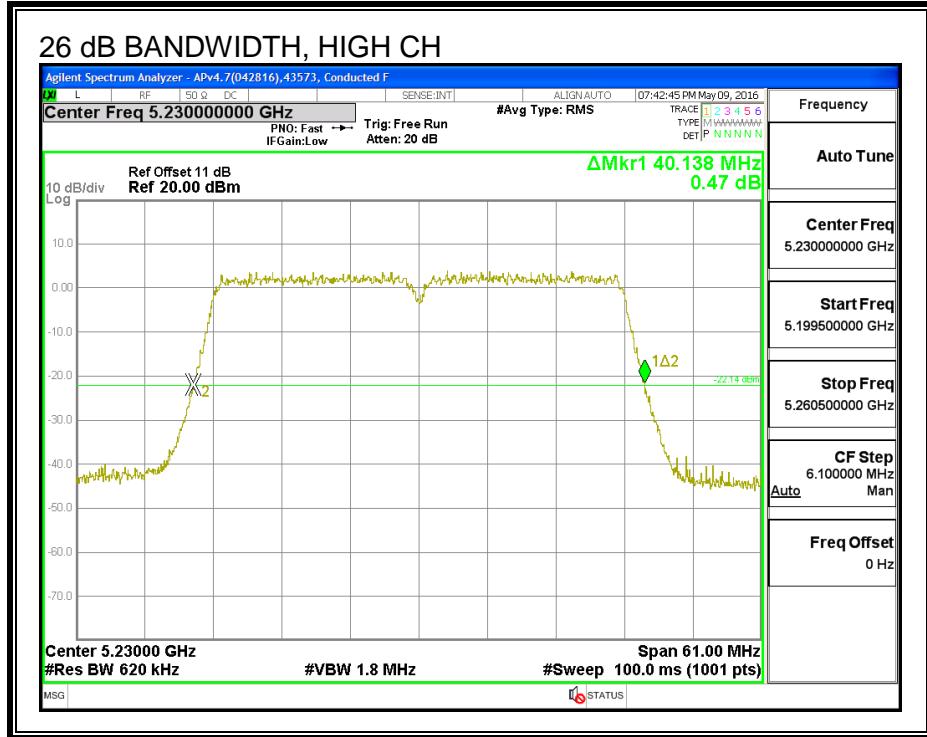
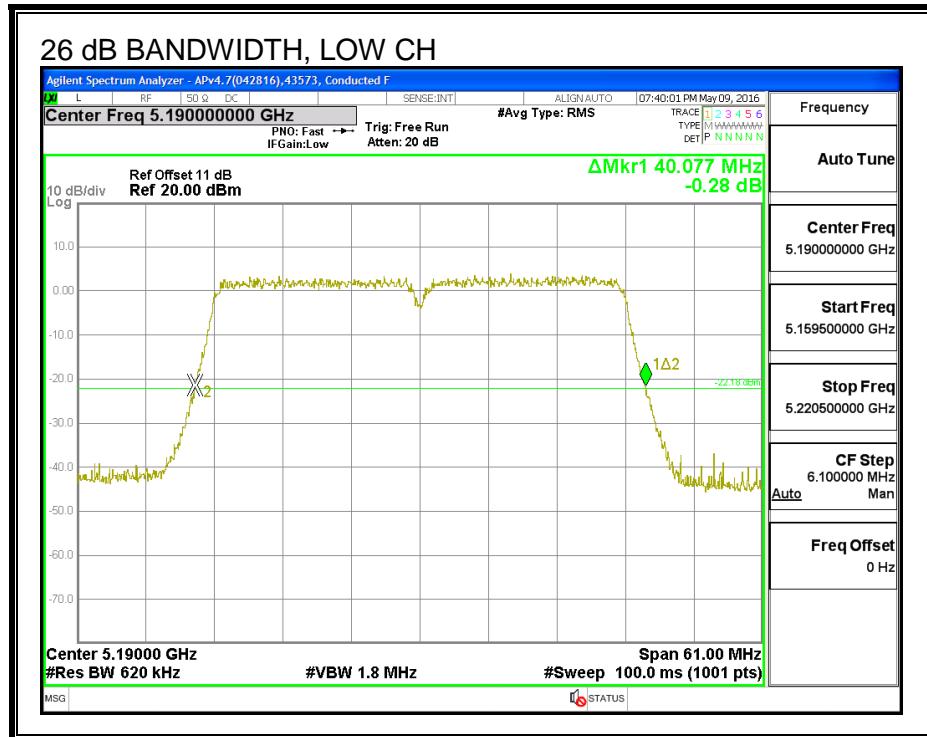
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.63	40.08
High	5230	40.57	40.14

26 DB BANDWIDTH, CHAIN 0

26 DB BANDWIDTH, CHAIN 1

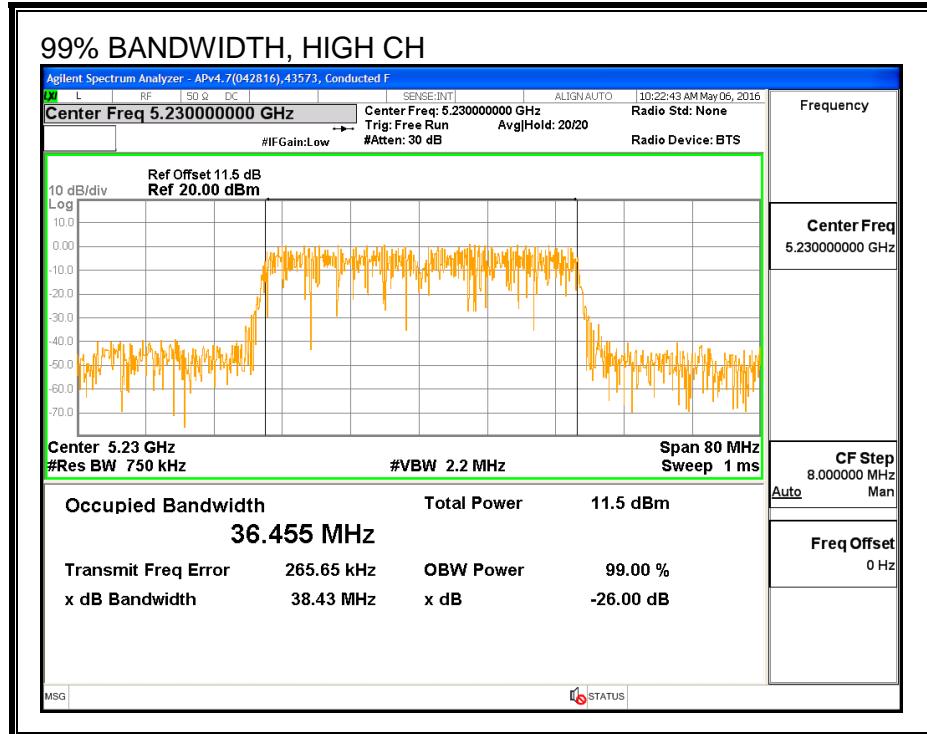
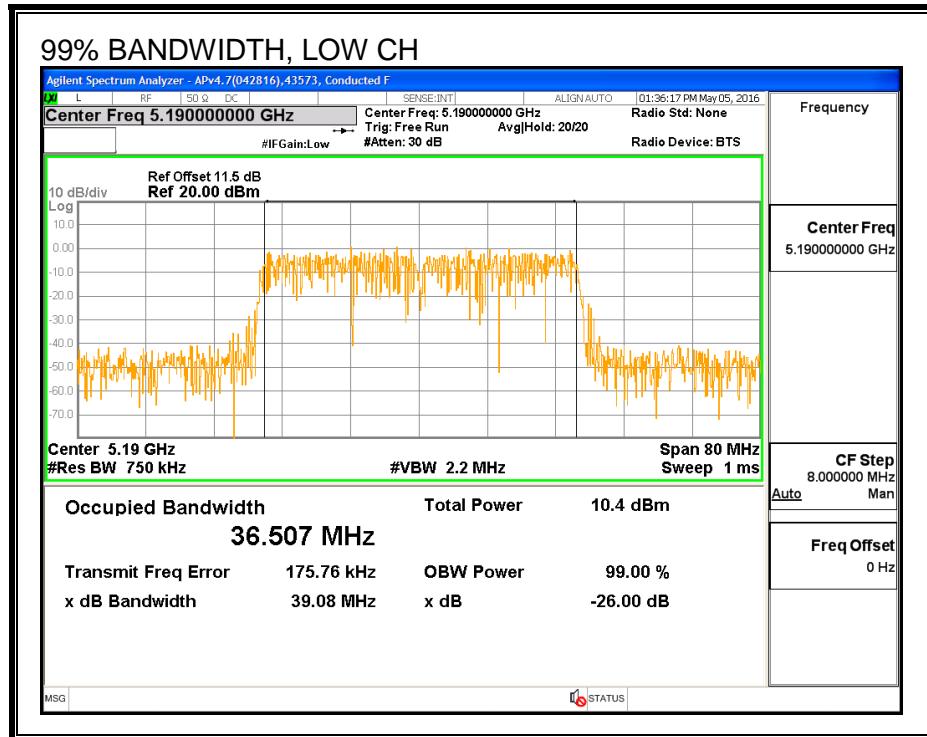
7.6.2. 99% BANDWIDTH

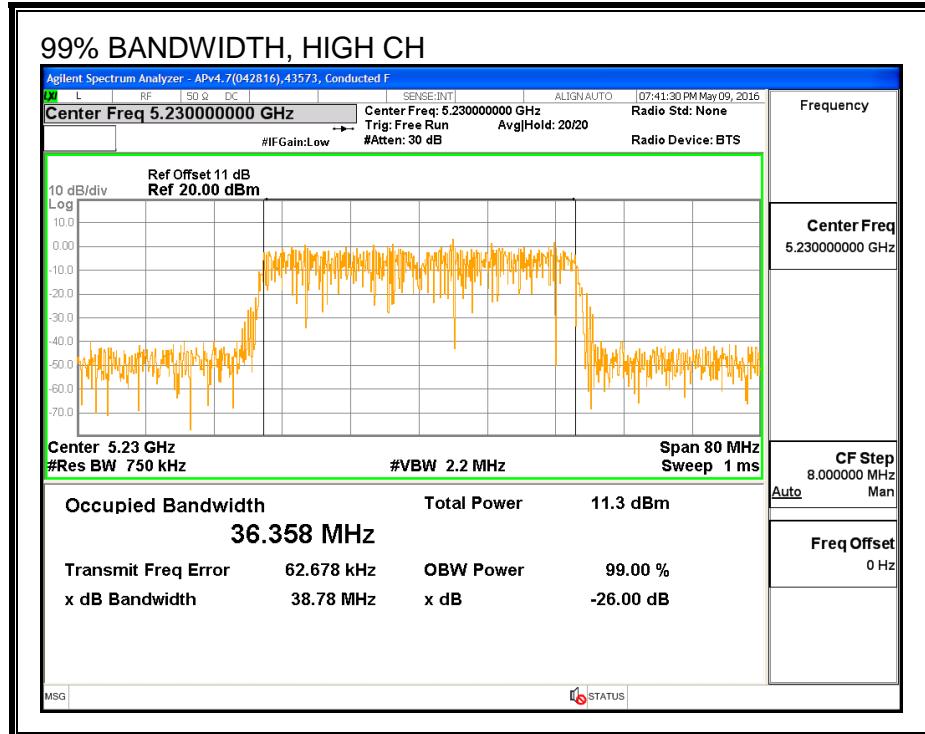
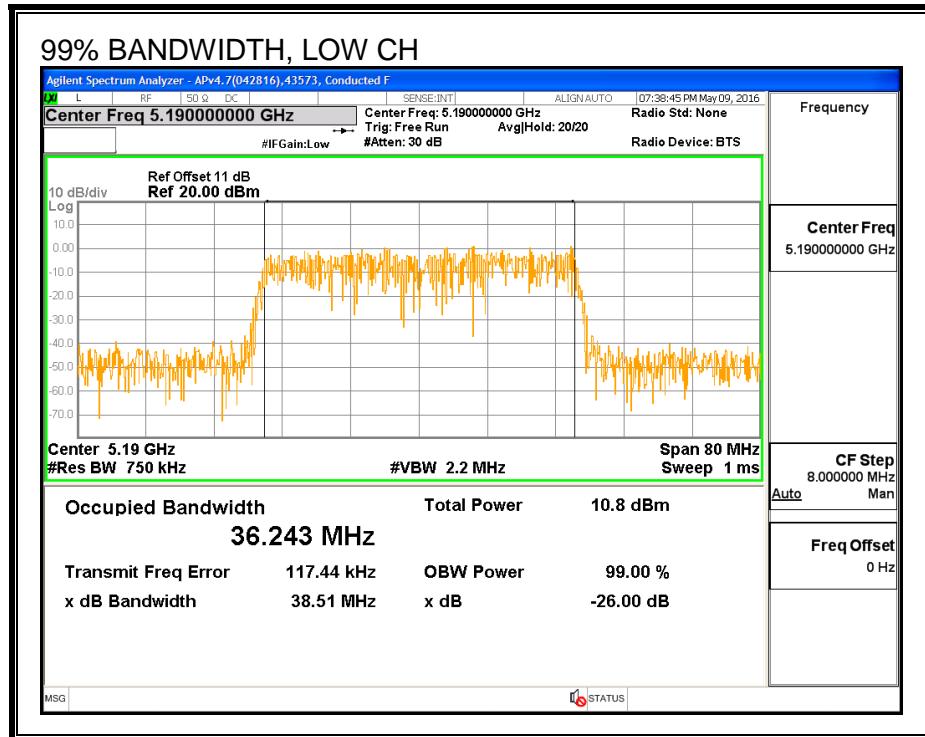
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.507	36.243
High	5230	36.455	36.358

99% BANDWIDTH, CHAIN 0

99% BANDWIDTH, CHAIN 1

7.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	14.38	14.41	17.41
High	5230	18.87	18.98	21.94

7.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-4.74	-6.01	-5.33

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-4.74	-6.01	-2.34

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-5.33	-2.34	24.00	11.00
High	5230	-5.33	-2.34	24.00	11.00

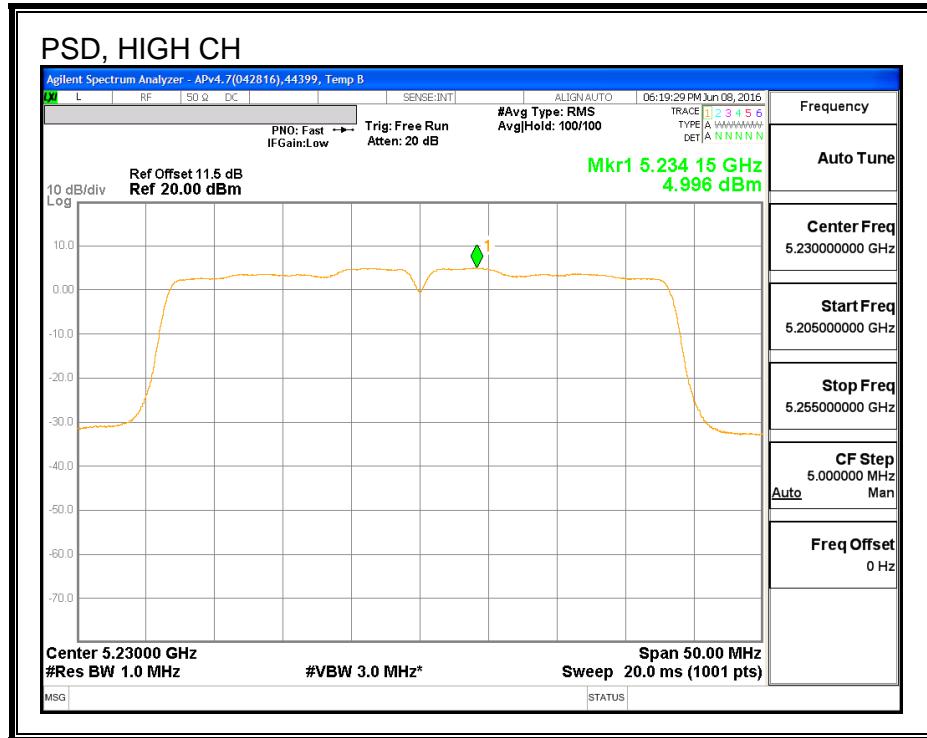
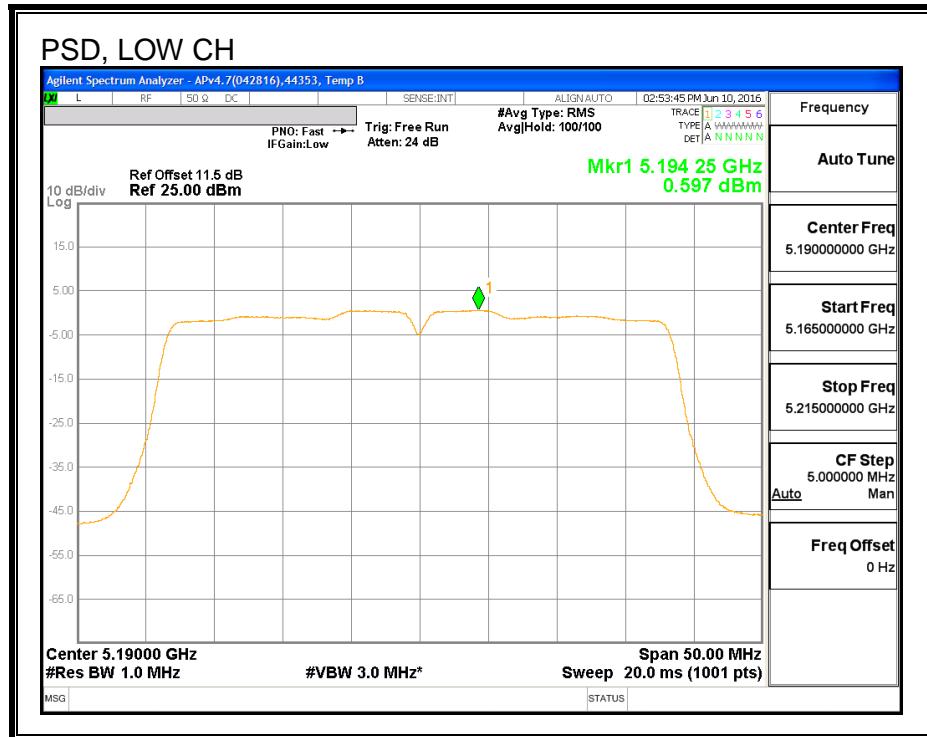
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

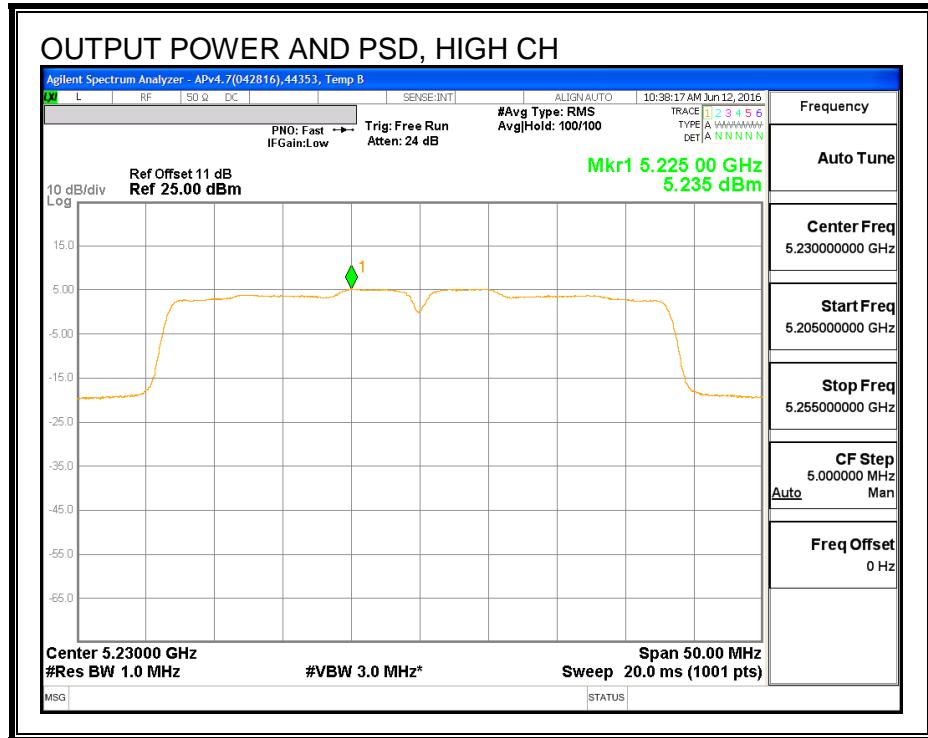
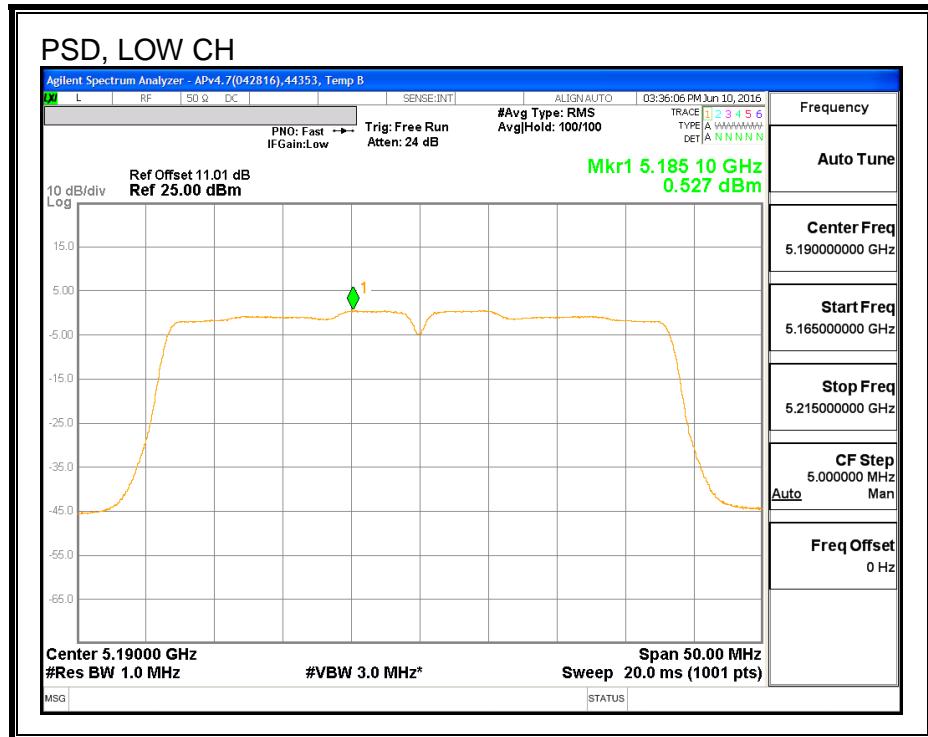
Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.38	14.41	17.41	24.00	-6.59
High	5230	18.87	18.98	21.94	24.00	-2.06

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	0.60	0.53	3.57	11.00	-7.43
High	5230	5.00	5.24	8.13	11.00	-2.87

PSD, CHAIN 0

PSD, CHAIN 1

7.7. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.2 GHz BAND

7.7.1. 26 dB BANDWIDTH

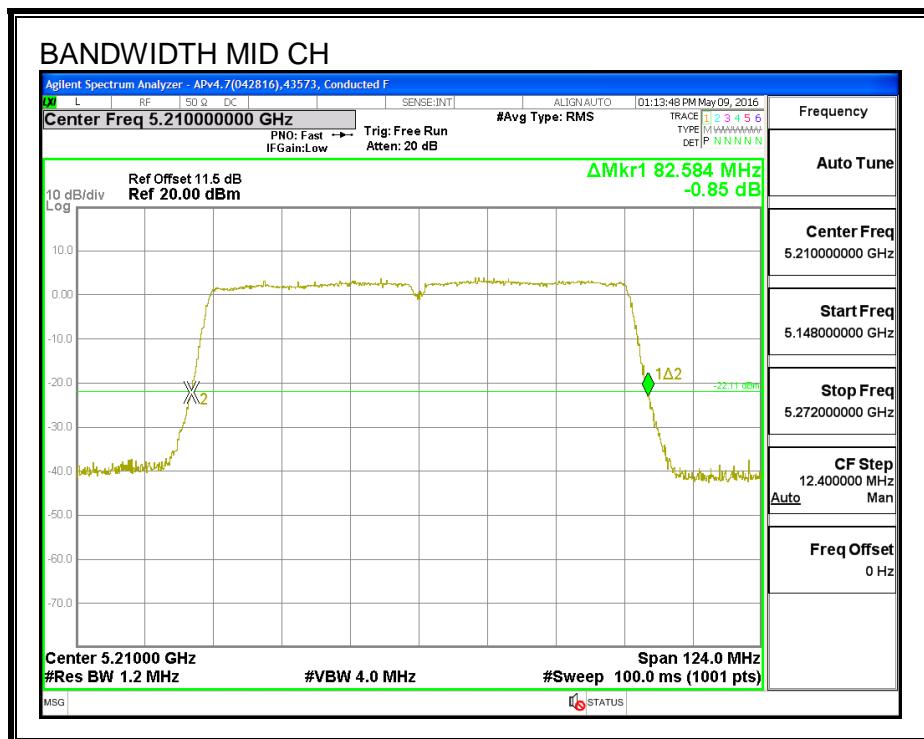
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.58

26 dB BANDWIDTH



7.7.2. 99% BANDWIDTH

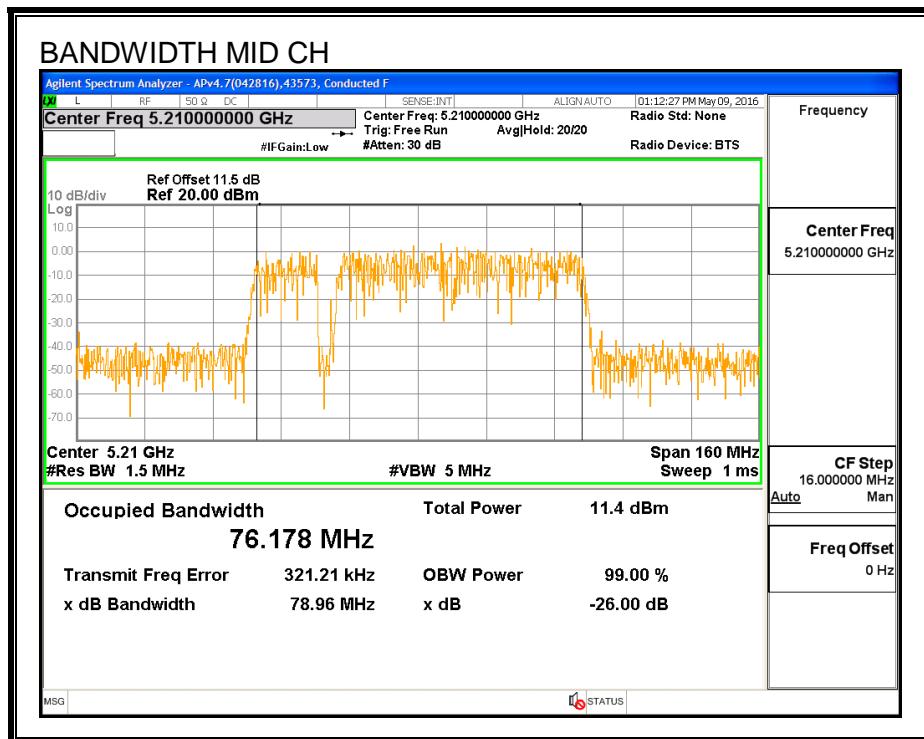
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	76.178

99% BANDWIDTH



7.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	15.48

7.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-4.74	-4.74	24.00	11.00

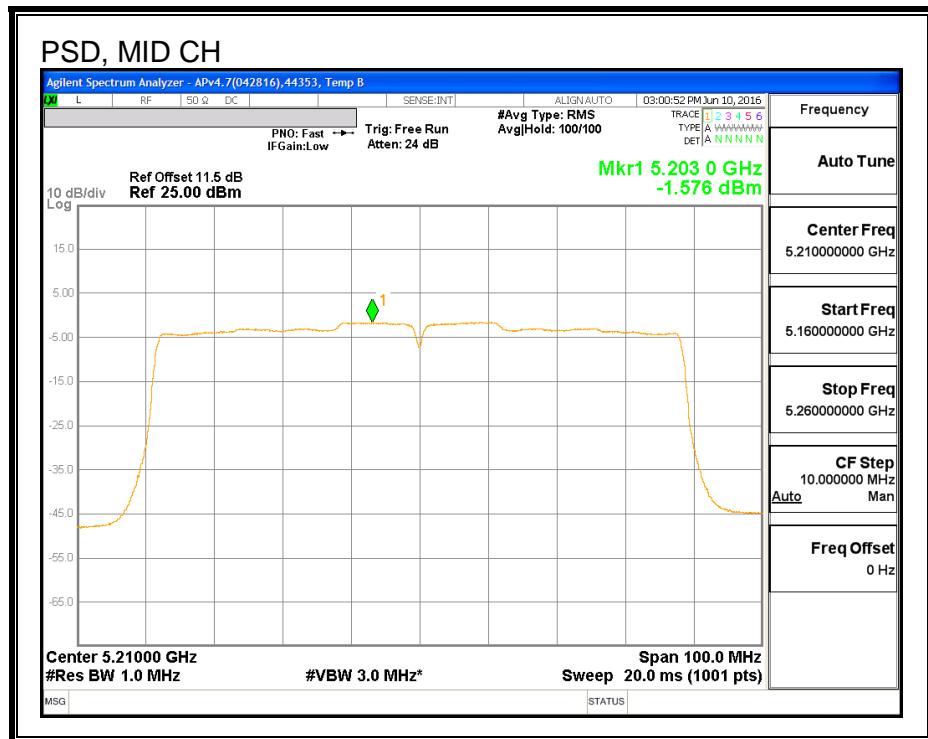
Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	15.48	15.48	24.00	-8.52

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-1.58	-1.42	11.00	-12.42

PSD

7.8. 802.11ac VHT80 CHAIN 1 MODE IN THE 5.2 GHz BAND

7.8.1. 26 dB BANDWIDTH

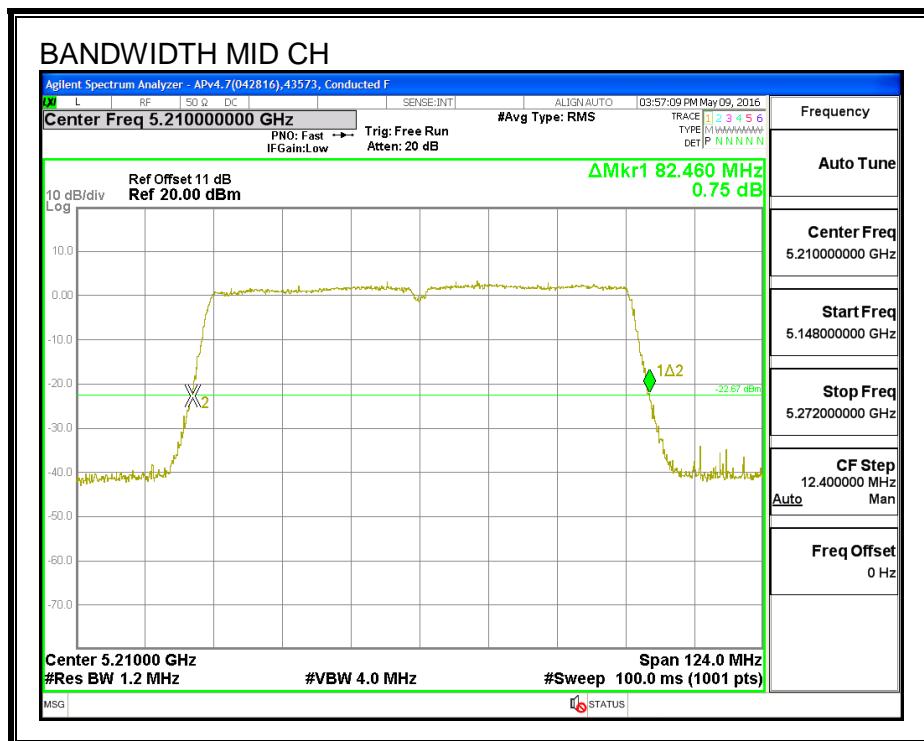
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.46

26 dB BANDWIDTH



7.8.2. 99% BANDWIDTH

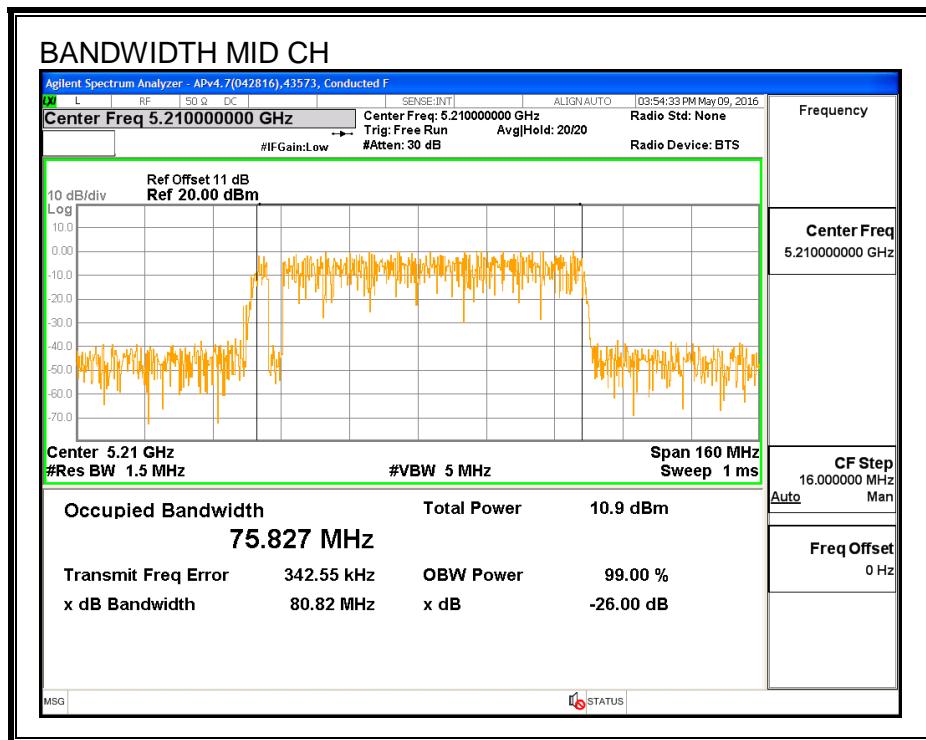
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.827

99% BANDWIDTH



7.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	15.35

7.8.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-6.01	-6.01	24.00	11.00

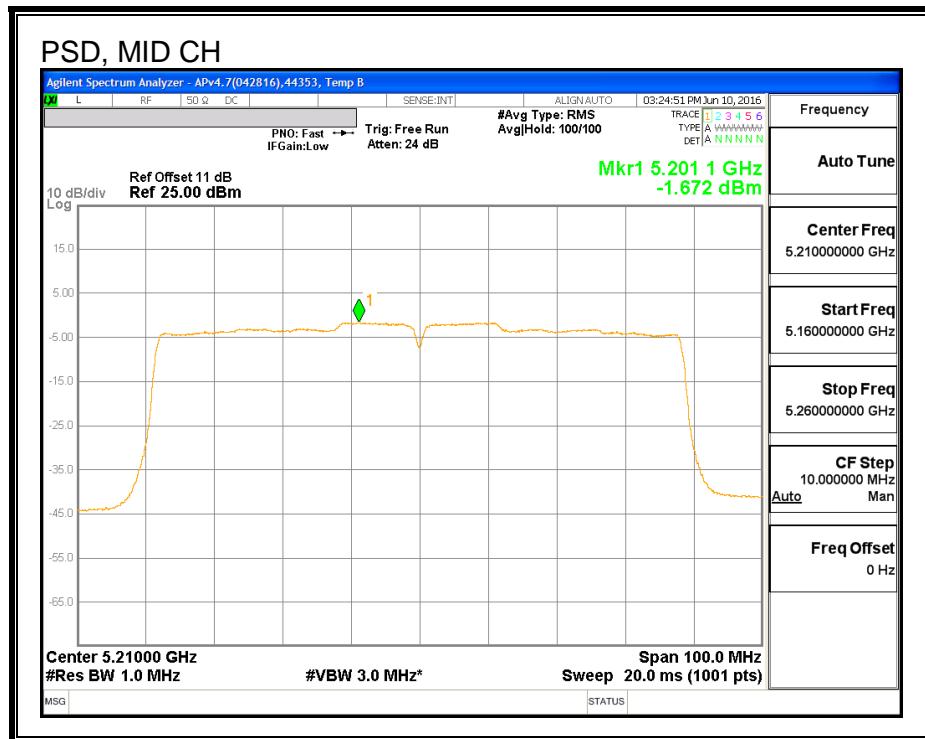
Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	15.35	15.35	24.00	-8.65

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-1.67	-1.51	11.00	-12.51

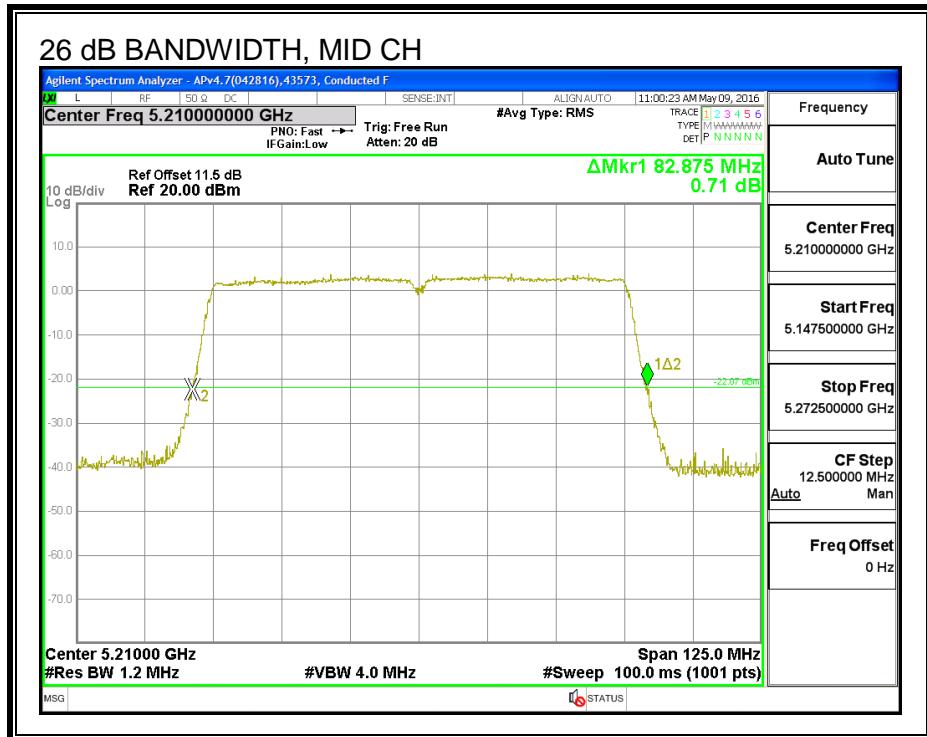
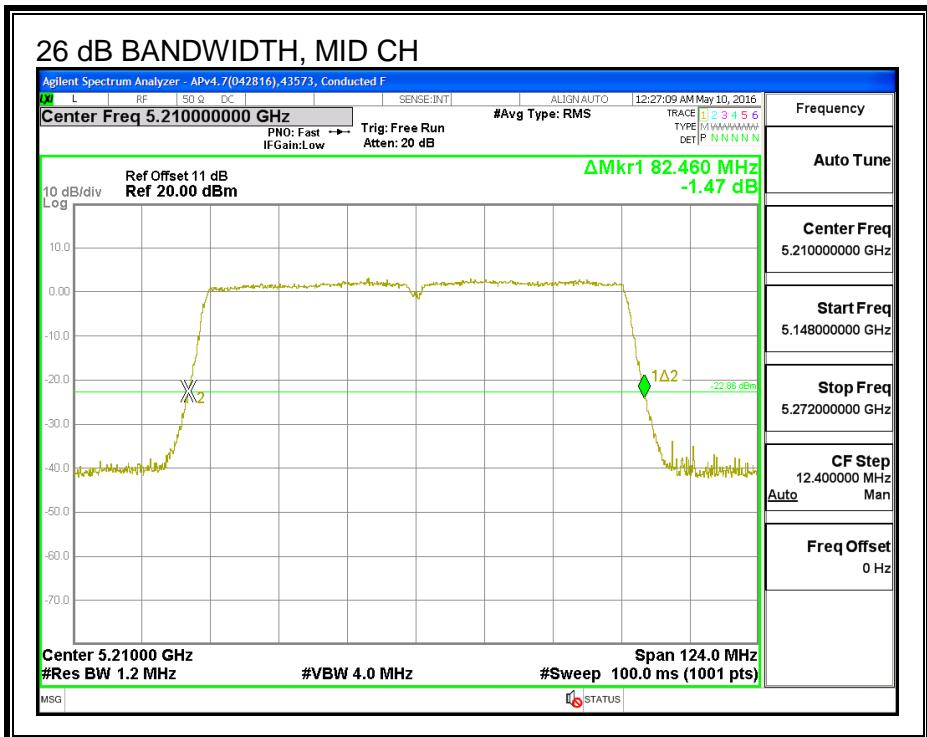
PSD

7.9. 802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND**7.9.1. 26 dB BANDWIDTH****LIMITS**

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Mid	5210	82.88	82.46

26 DB BANDWIDTH, CHAIN 0**26 DB BANDWIDTH, CHAIN 1**

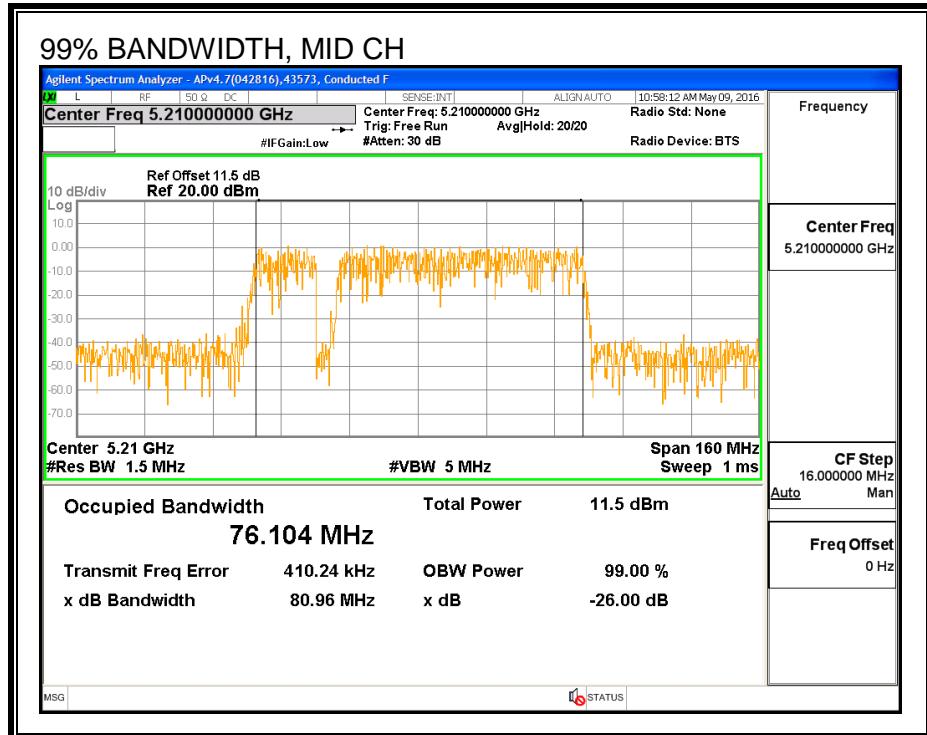
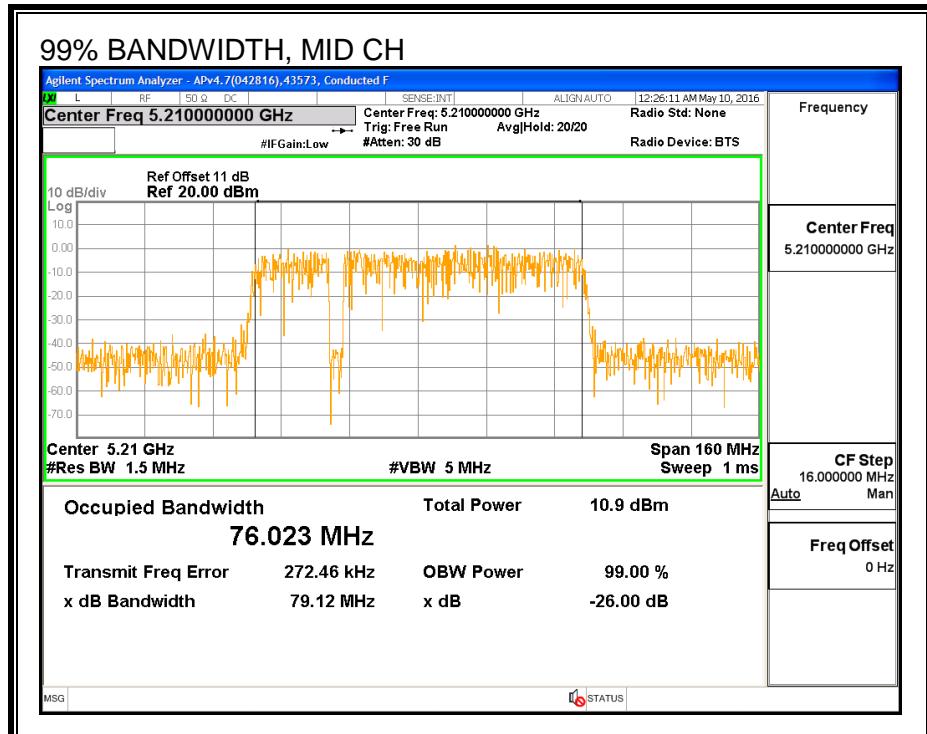
7.9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Mid	5210	76.104	76.023

99% BANDWIDTH, CHAIN 0**99% BANDWIDTH, CHAIN 1**

7.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	14.90	14.86	17.89

7.9.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-4.74	-6.01	-5.33

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-4.74	-6.08	-2.37

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-5.33	-2.34	24.00	11.00

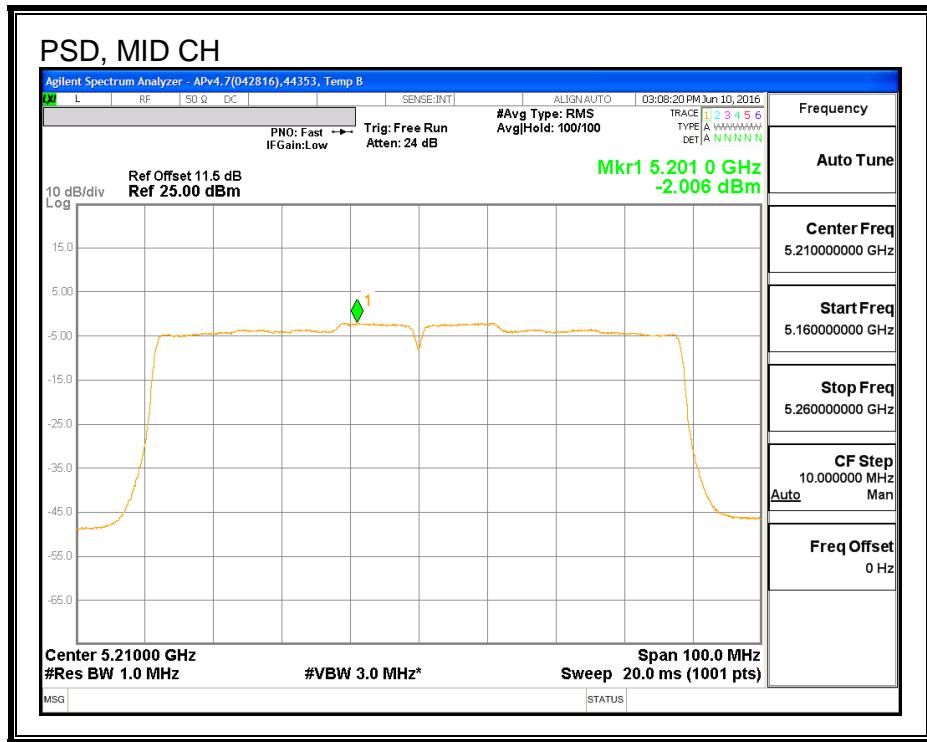
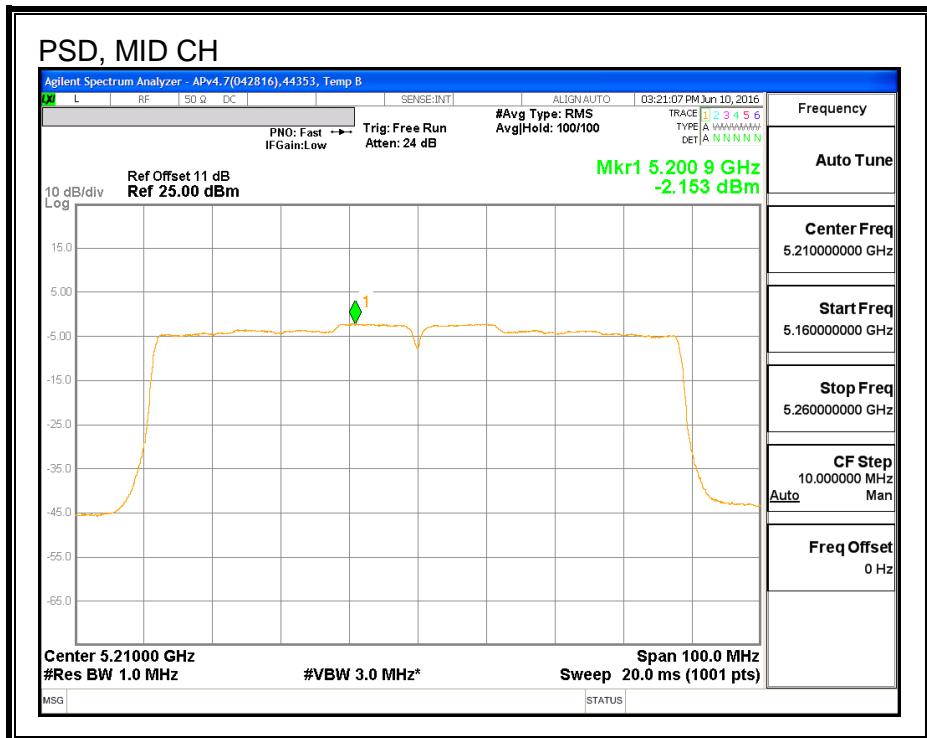
Duty Cycle CF (dB)	0.20	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	14.90	14.86	17.89	24.00	-6.11

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-2.01	-2.15	1.13	11.00	-9.87

PSD, CHAIN 0**PSD, CHAIN 1**

7.10. 802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND

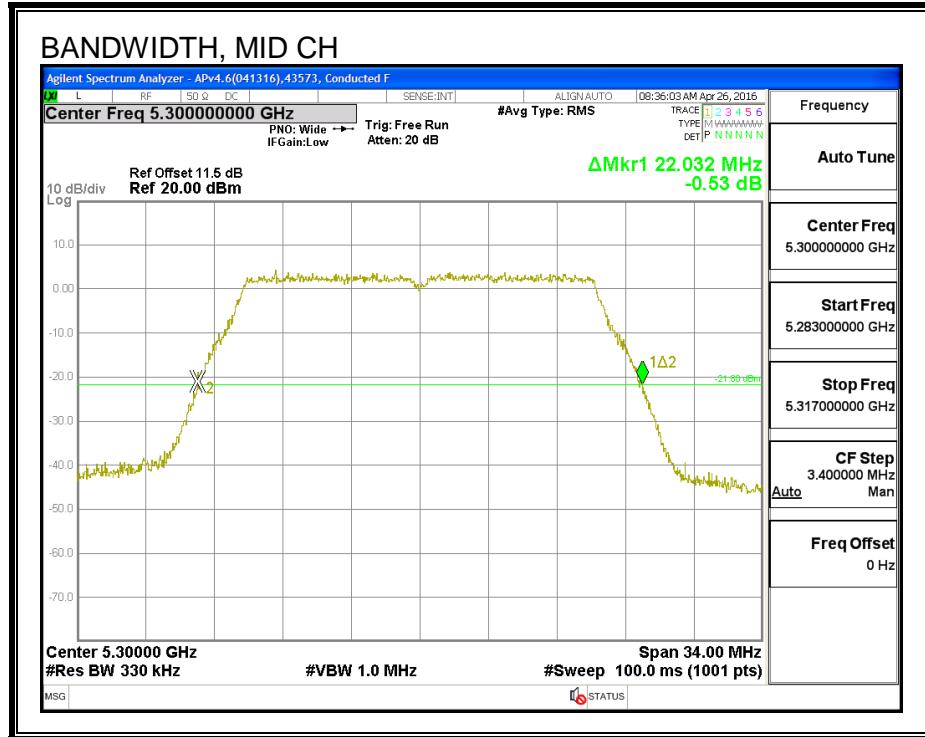
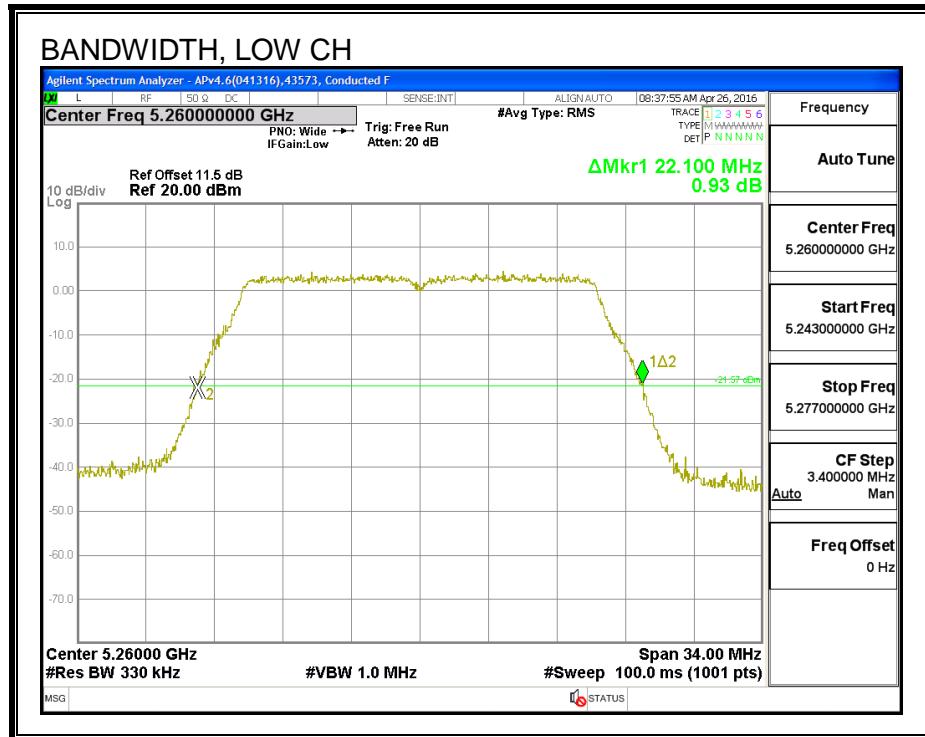
7.10.1. 26 dB BANDWIDTH

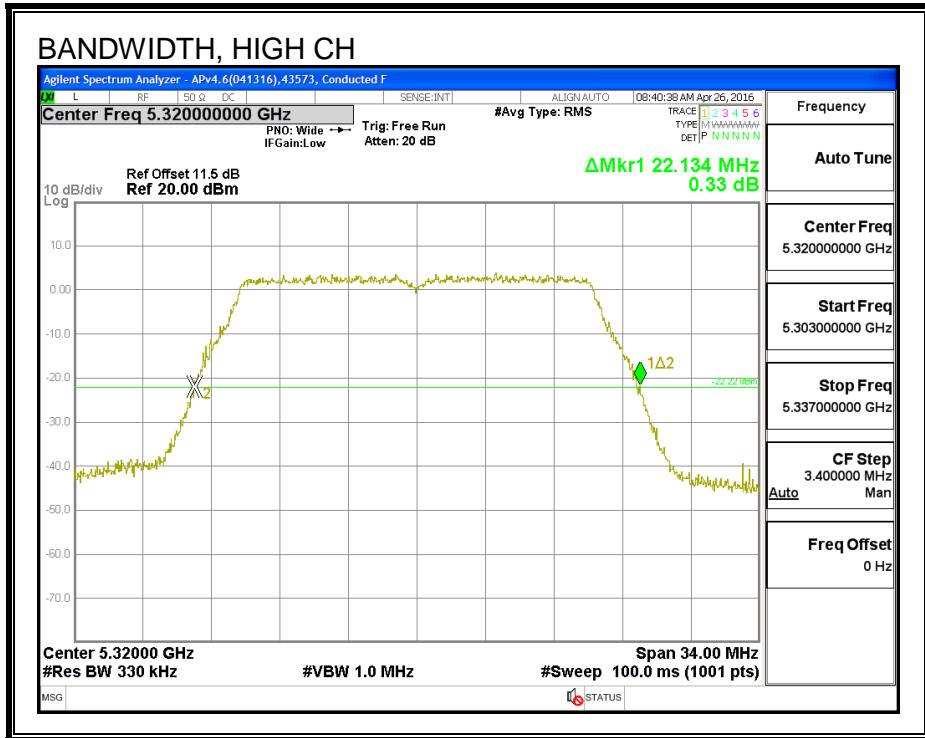
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.10
Mid	5300	22.03
High	5320	22.13

26 dB BANDWIDTH



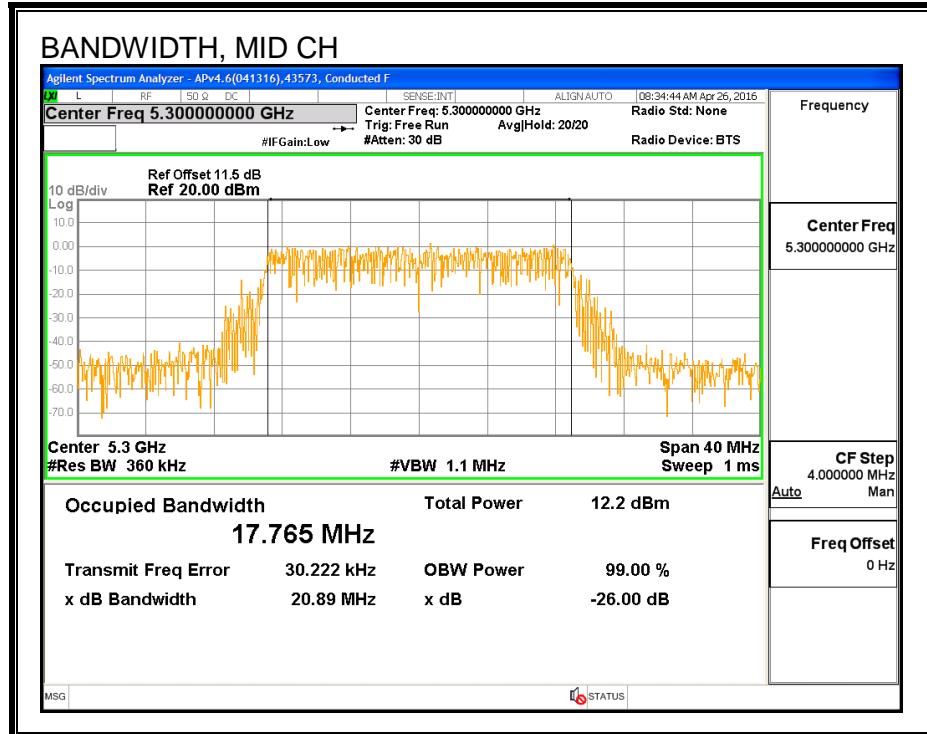
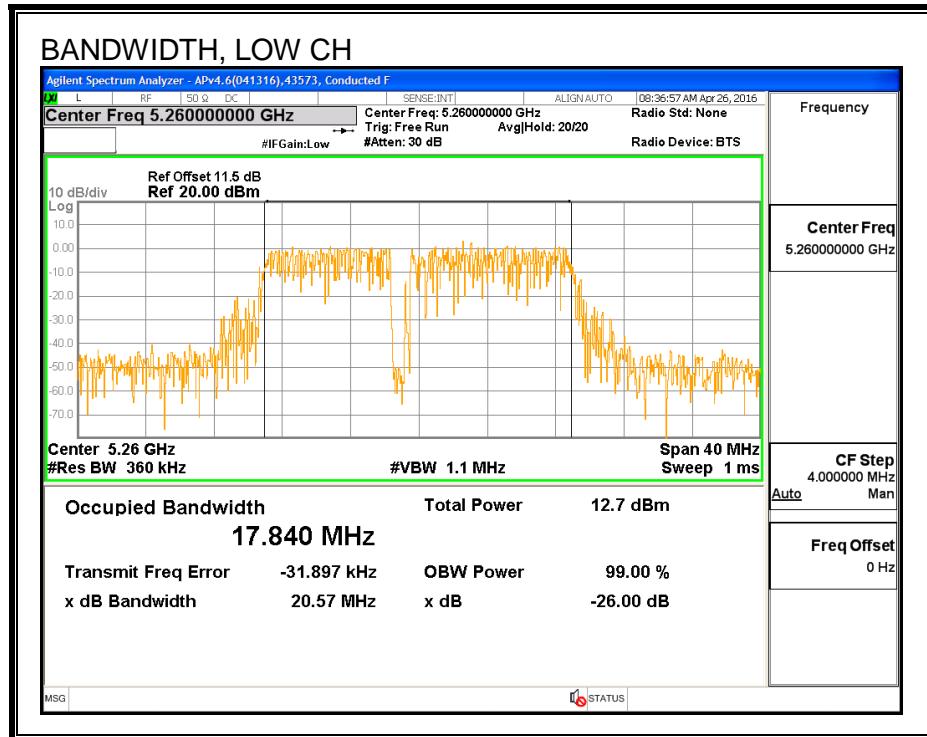
7.10.2. 99% BANDWIDTH

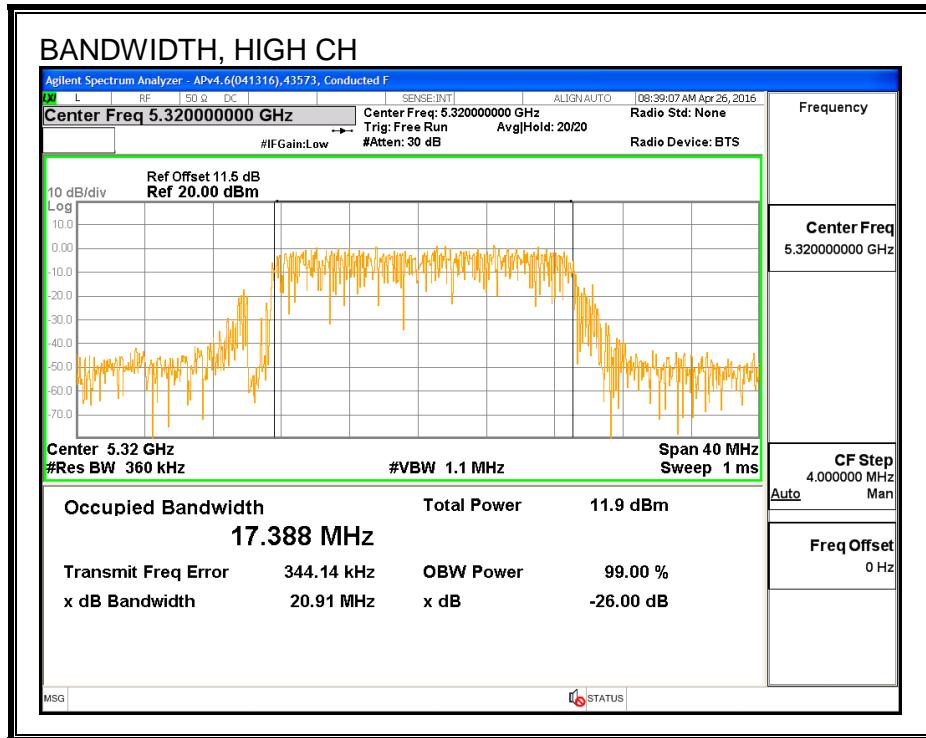
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.840
Mid	5300	17.765
High	5320	17.388

99% BANDWIDTH



7.10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	18.35
Mid	5300	18.39
High	5320	16.00

7.10.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.10	17.840	-5.06	23.51	11.00
Mid	5300	22.03	17.765	-5.06	23.50	11.00
High	5320	22.13	17.388	-5.06	23.40	11.00

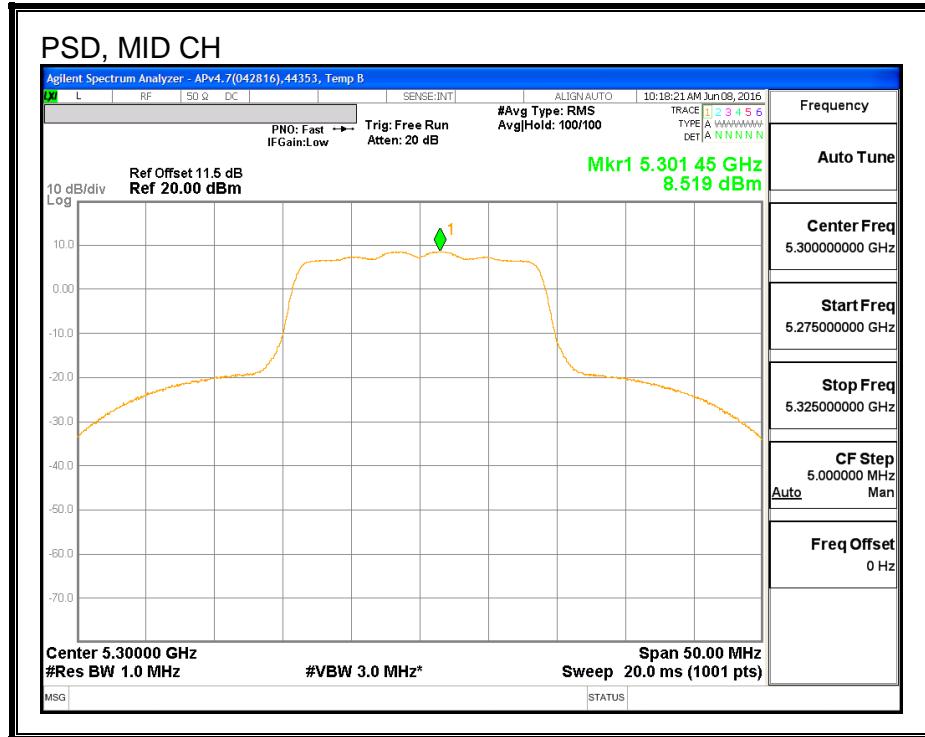
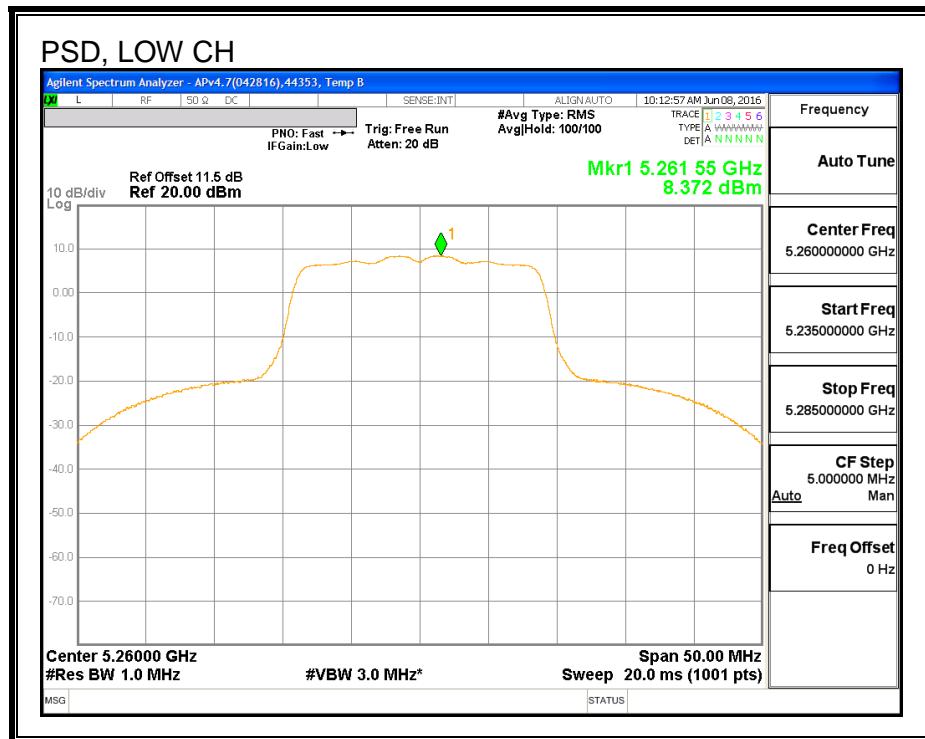
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

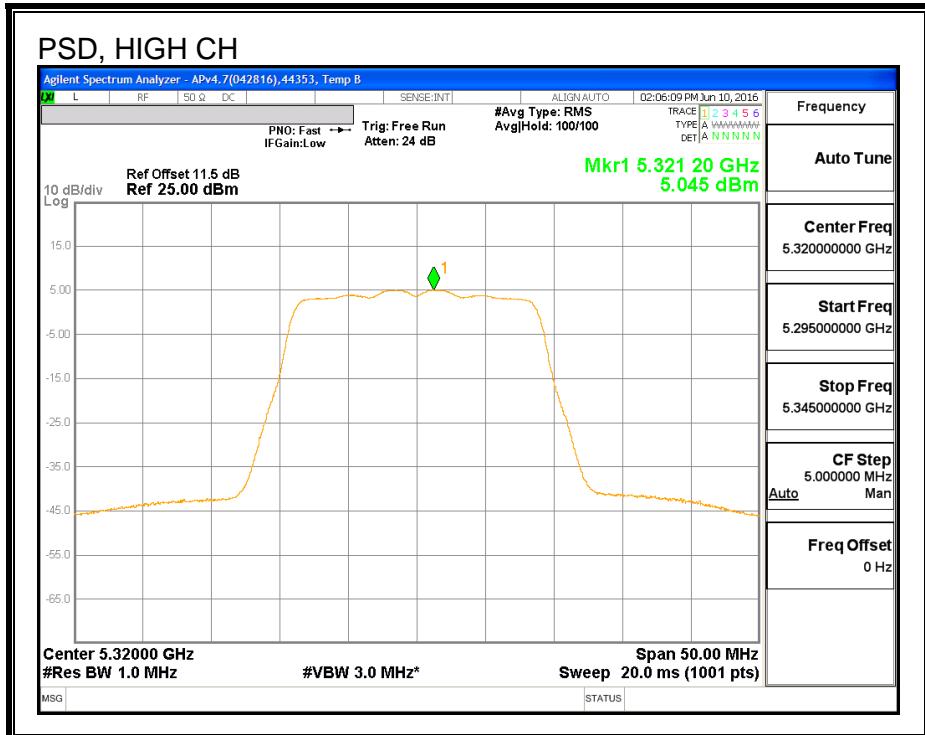
Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	18.35	18.35	23.51	-5.16
Mid	5300	18.39	18.39	23.50	-5.11
High	5320	16.00	16.00	23.40	-7.40

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	8.37	8.37	11.00	-2.63
Mid	5300	8.52	8.52	11.00	-2.48
High	5320	5.05	5.05	11.00	-5.96

PSD



7.11. 802.11n HT20 CHAIN 1 MODE IN THE 5.3 GHz BAND

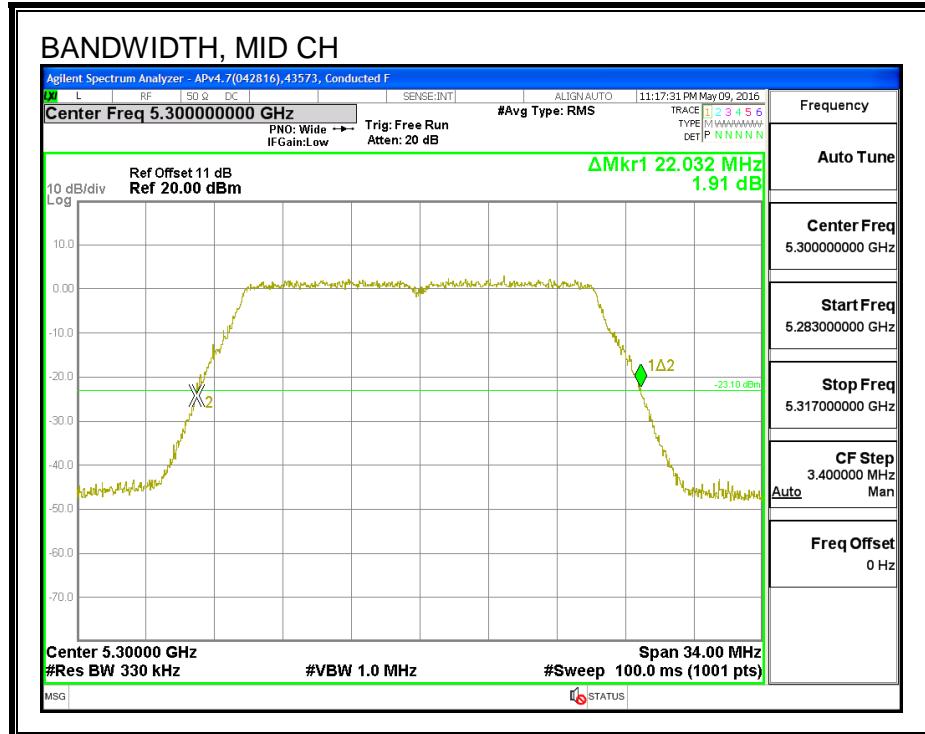
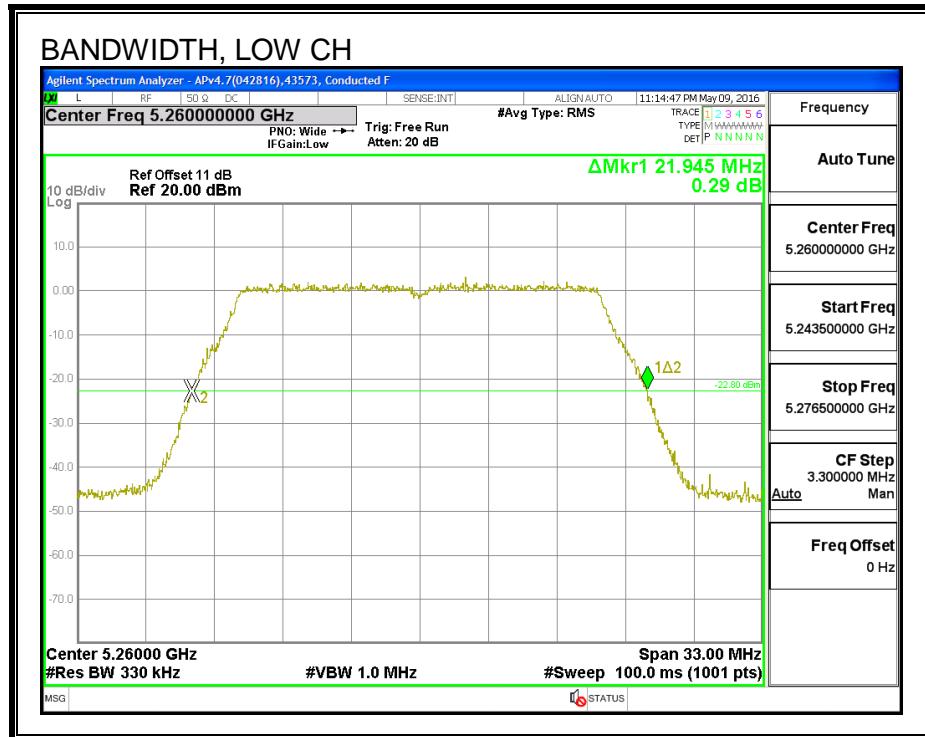
7.11.1. 26 dB BANDWIDTH

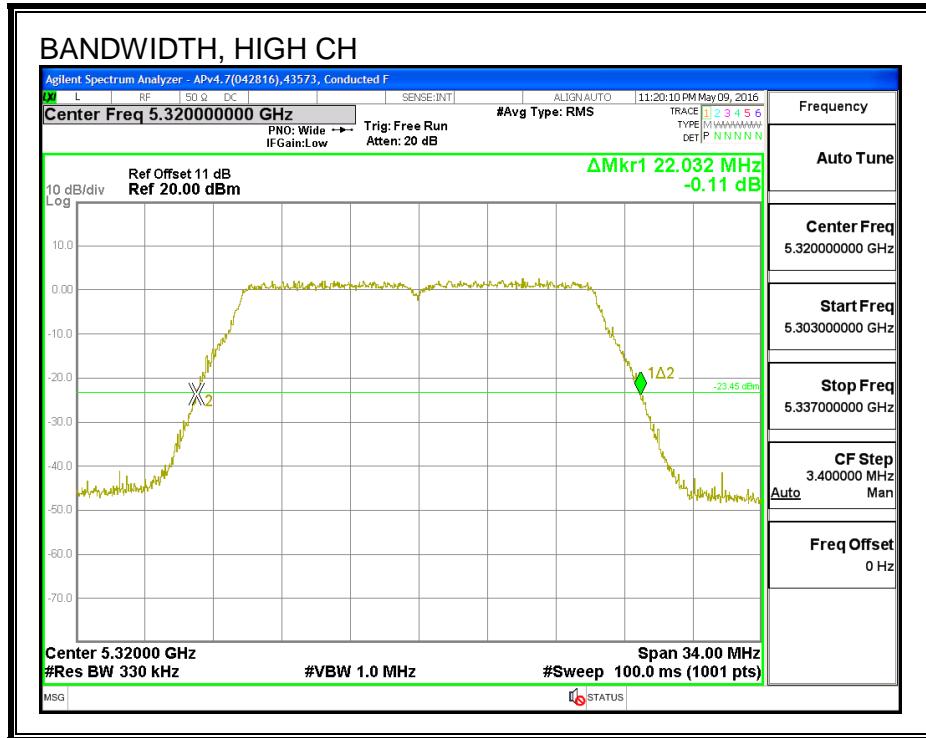
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	21.95
Mid	5300	22.03
High	5320	22.03

26 dB BANDWIDTH



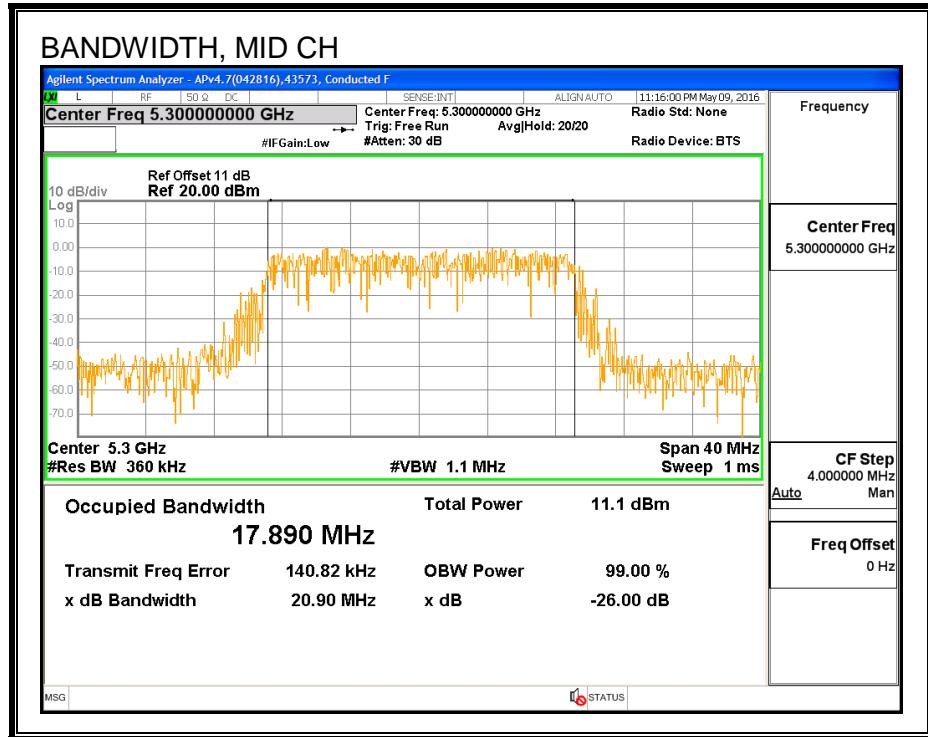
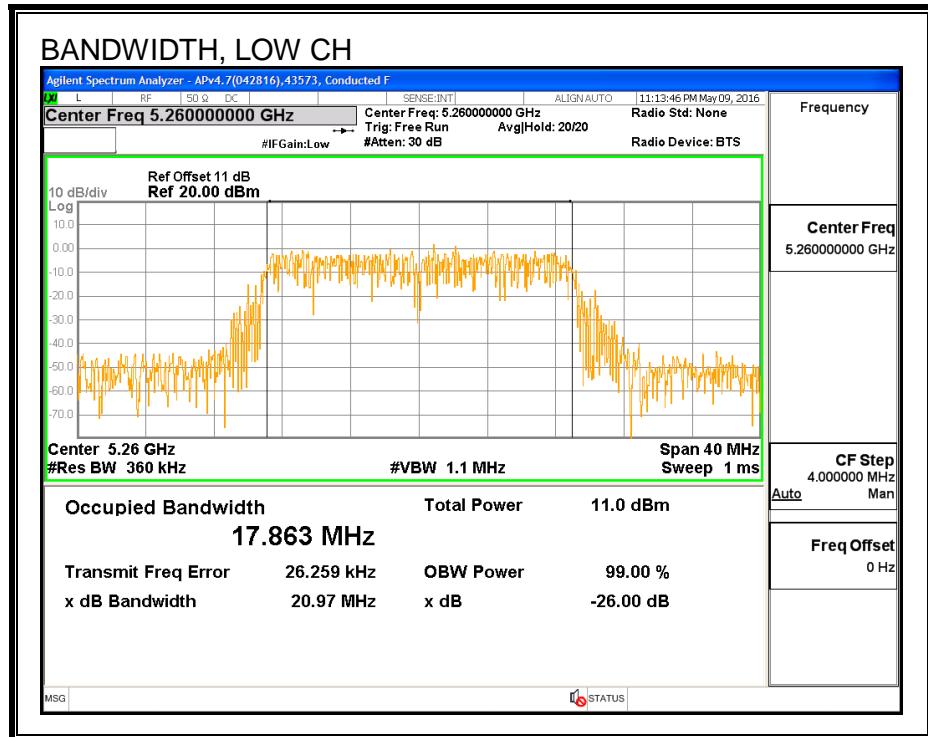
7.11.2. 99% BANDWIDTH

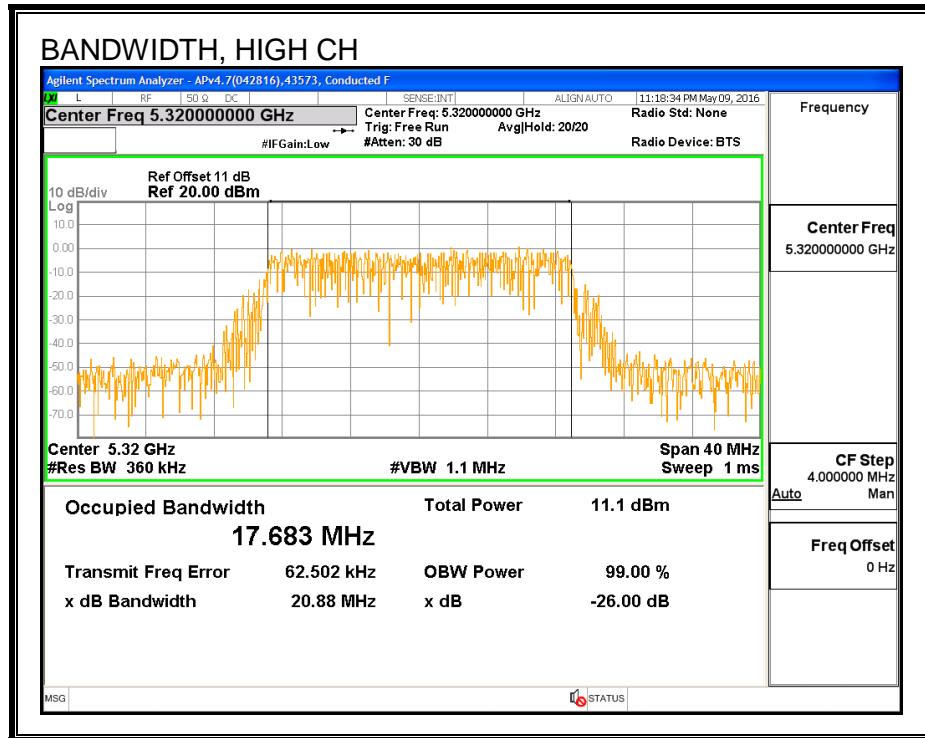
LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.863
Mid	5300	17.890
High	5320	17.683

99% BANDWIDTH



7.11.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	18.83
Mid	5300	18.89
High	5320	16.00

7.11.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.95	17.863	-5.08	23.52	11.00
Mid	5300	22.03	17.890	-5.08	23.53	11.00
High	5320	22.03	17.683	-5.08	23.48	11.00

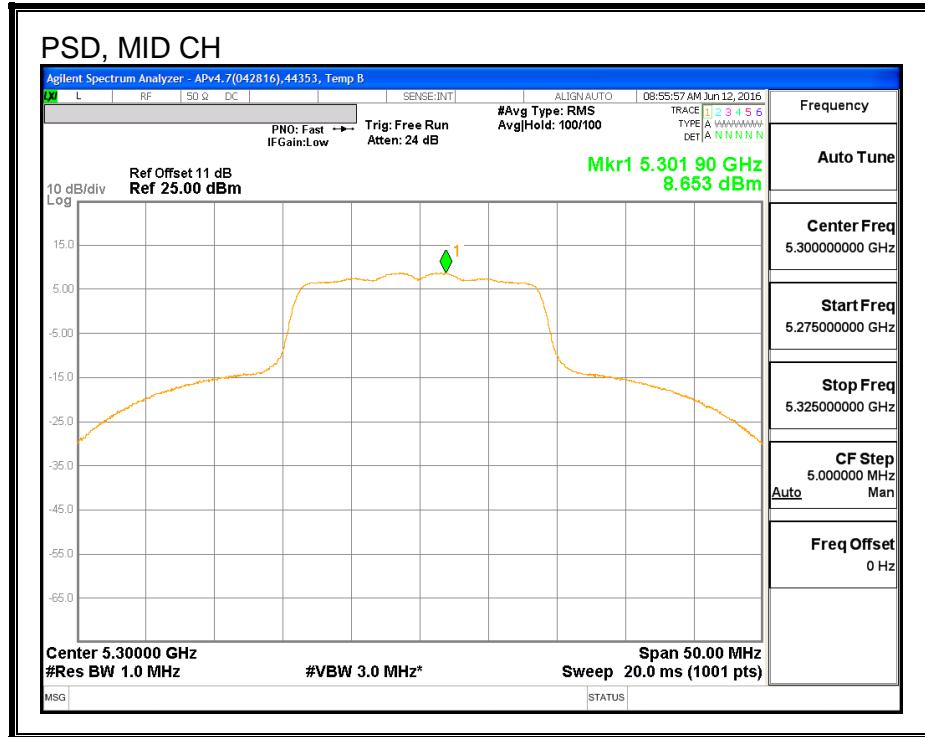
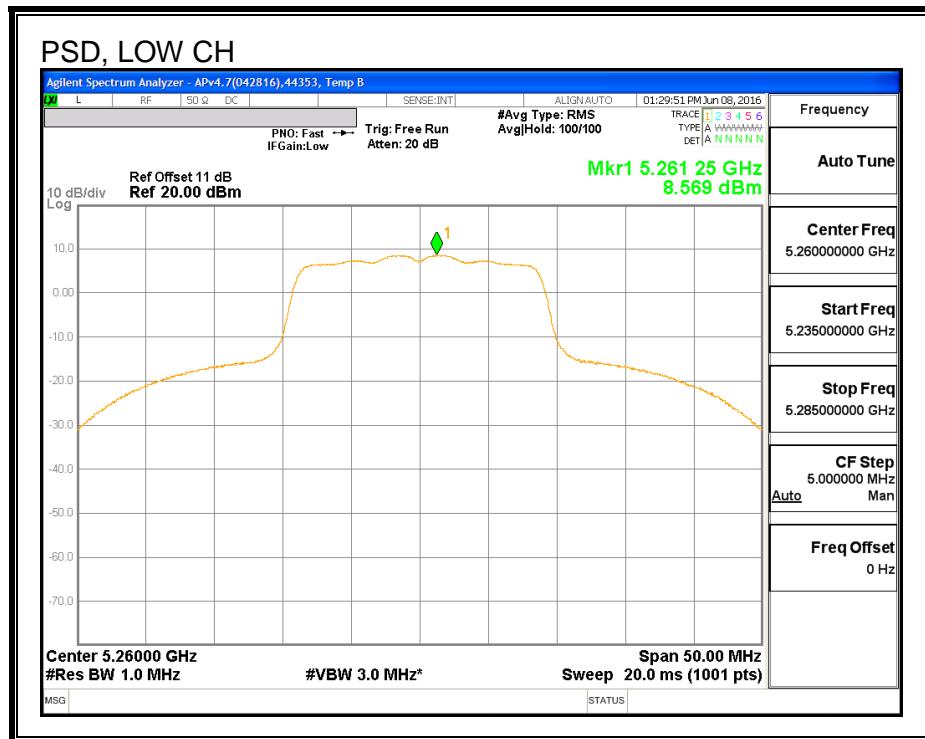
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

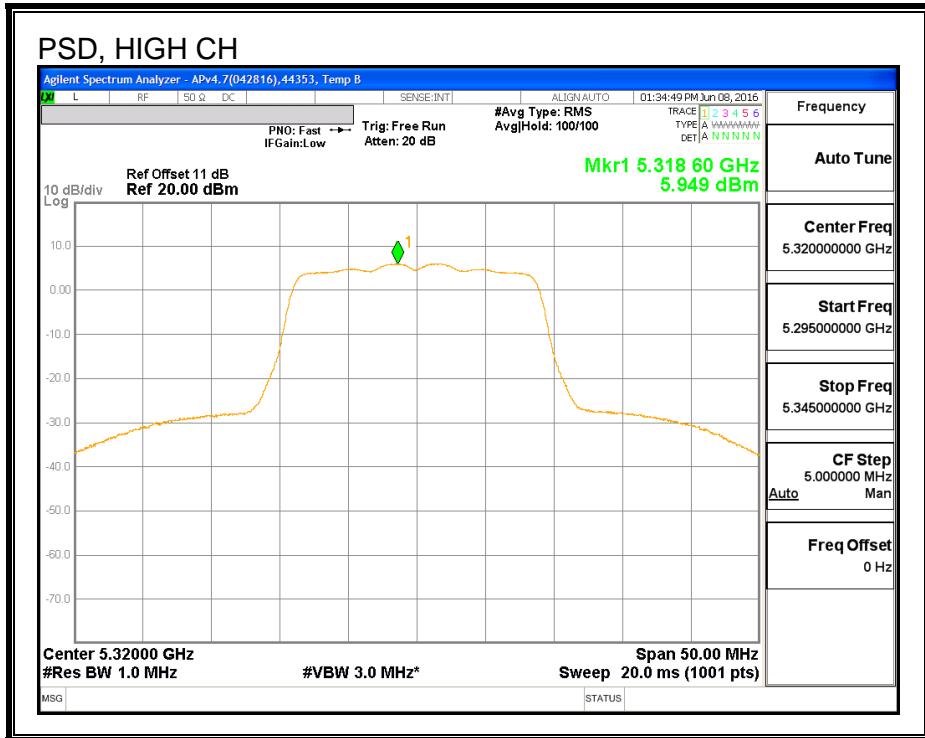
Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	18.83	18.83	23.52	-4.69
Mid	5300	18.89	18.89	23.53	-4.64
High	5320	16.00	16.00	23.48	-7.48

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	8.57	8.57	11.00	-2.43
Mid	5300	8.65	8.65	11.00	-2.35
High	5320	5.95	5.95	11.00	-5.05

PSD

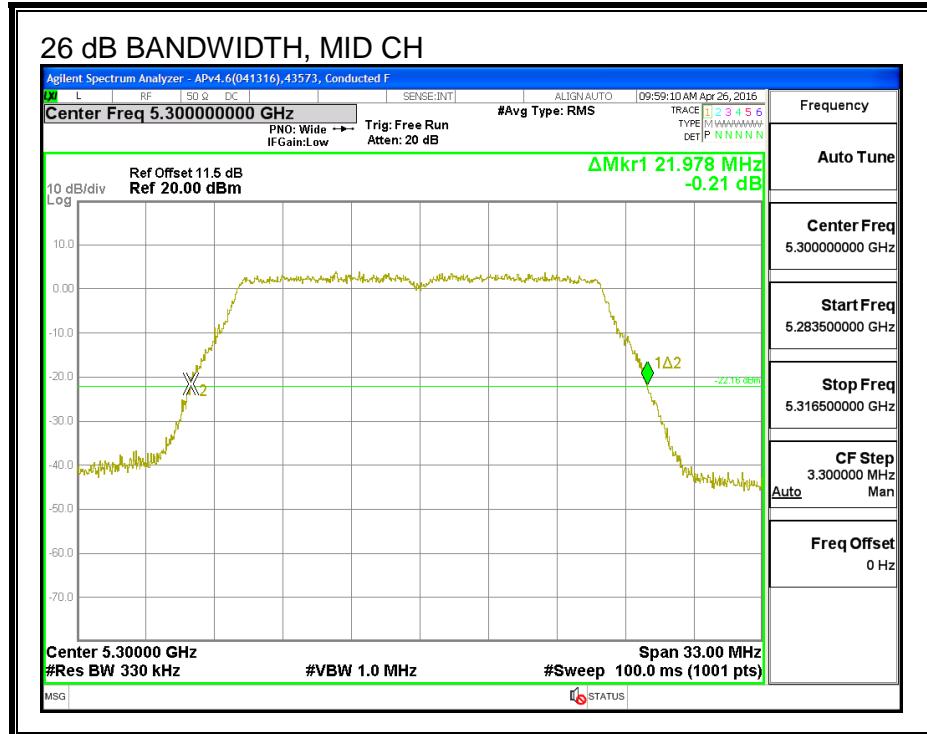
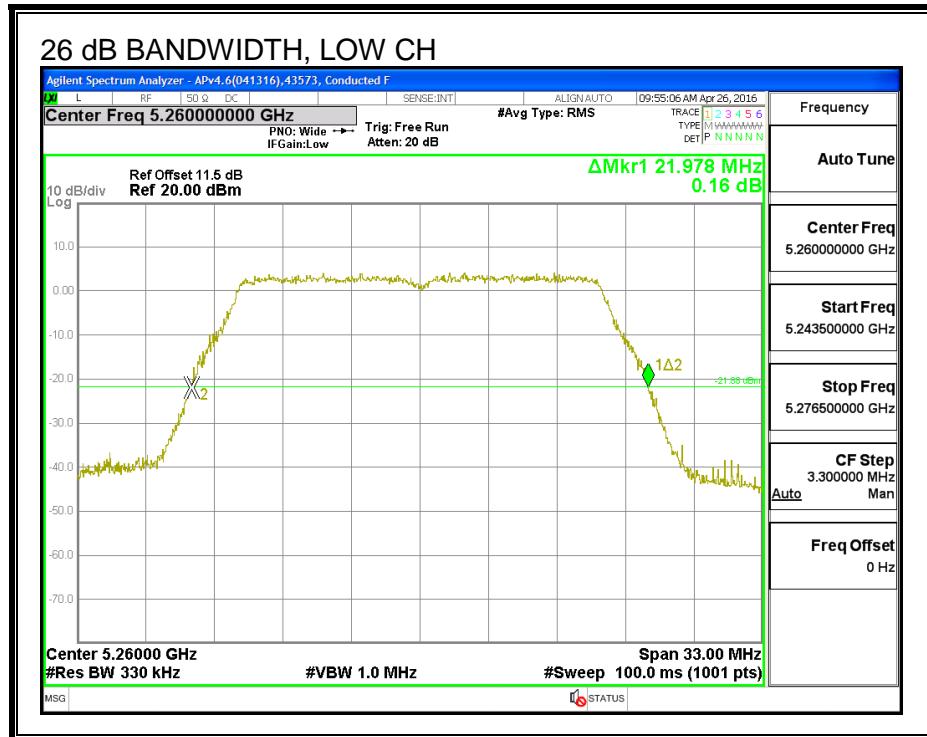


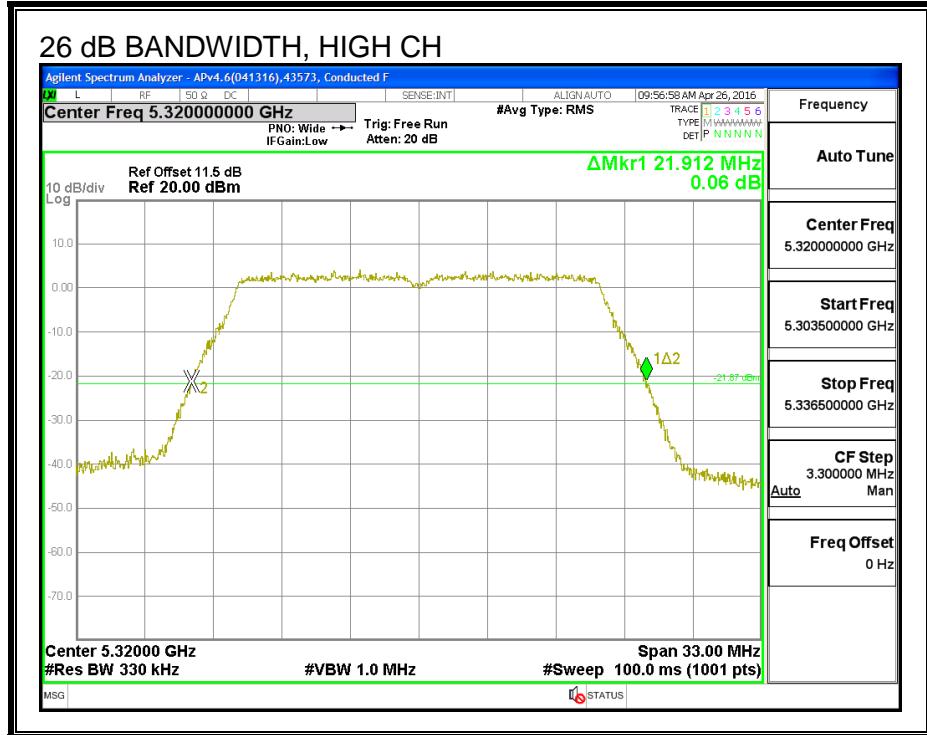
7.12. 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND**7.12.1. 26 dB BANDWIDTH****LIMITS**

None; for reporting purposes only.

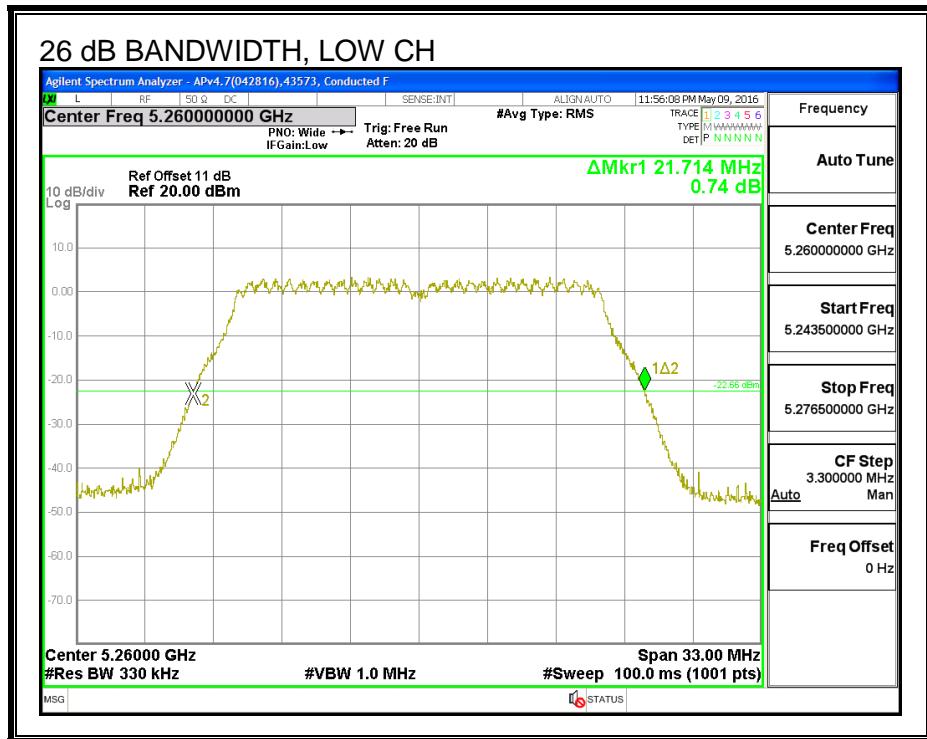
RESULTS

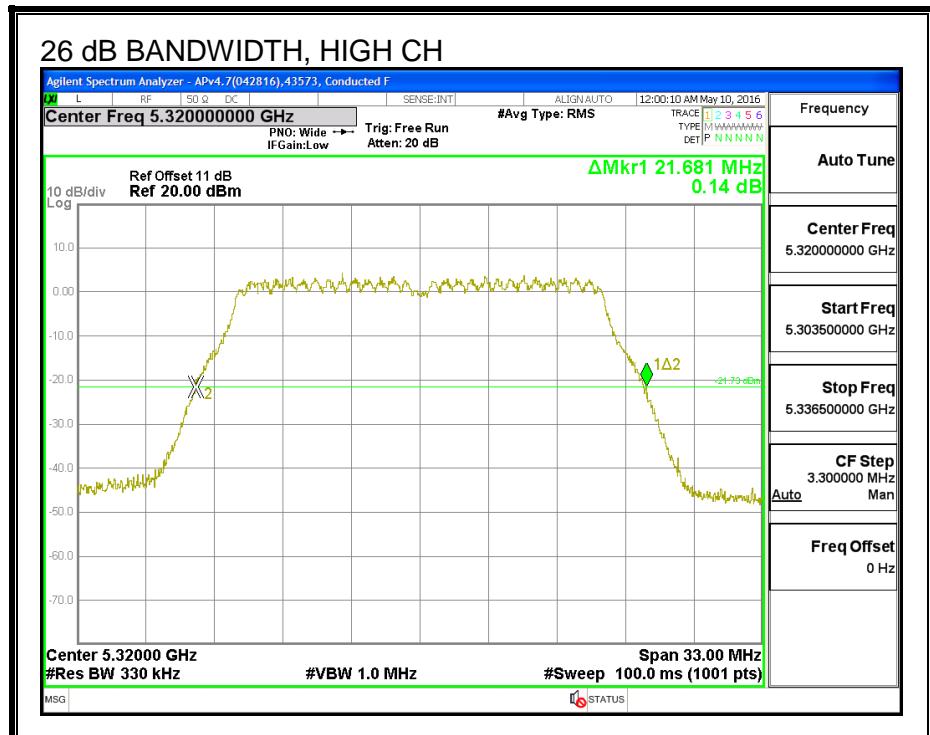
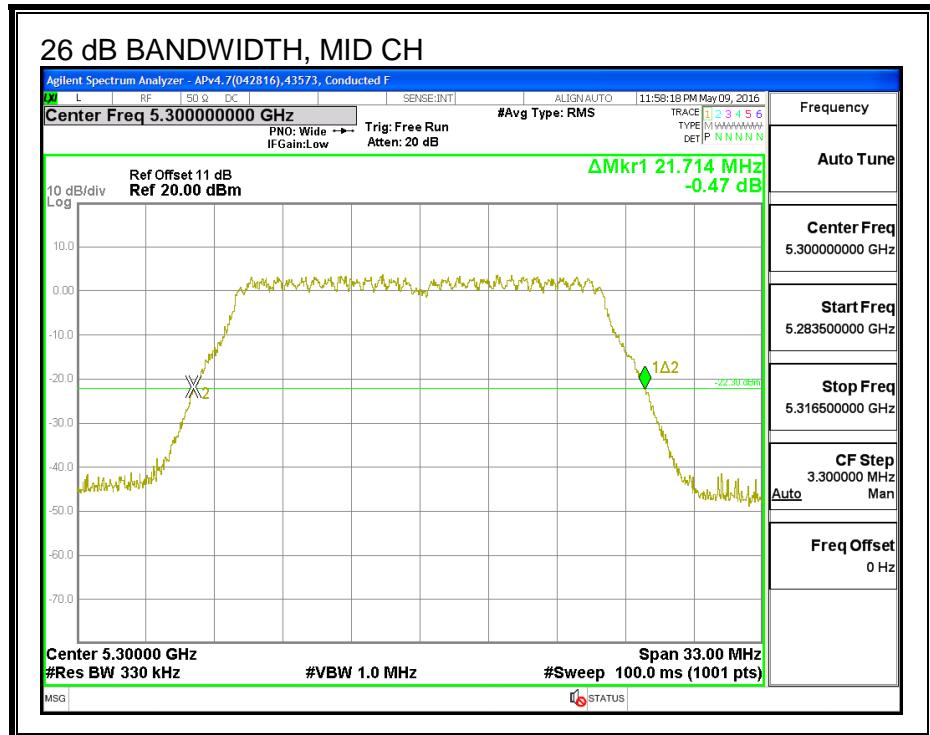
Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5260	21.98	21.71
Mid	5300	21.98	21.71
High	5320	21.91	21.68

26 DB BANDWIDTH, CHAIN 0



26 DB BANDWIDTH, CHAIN 1





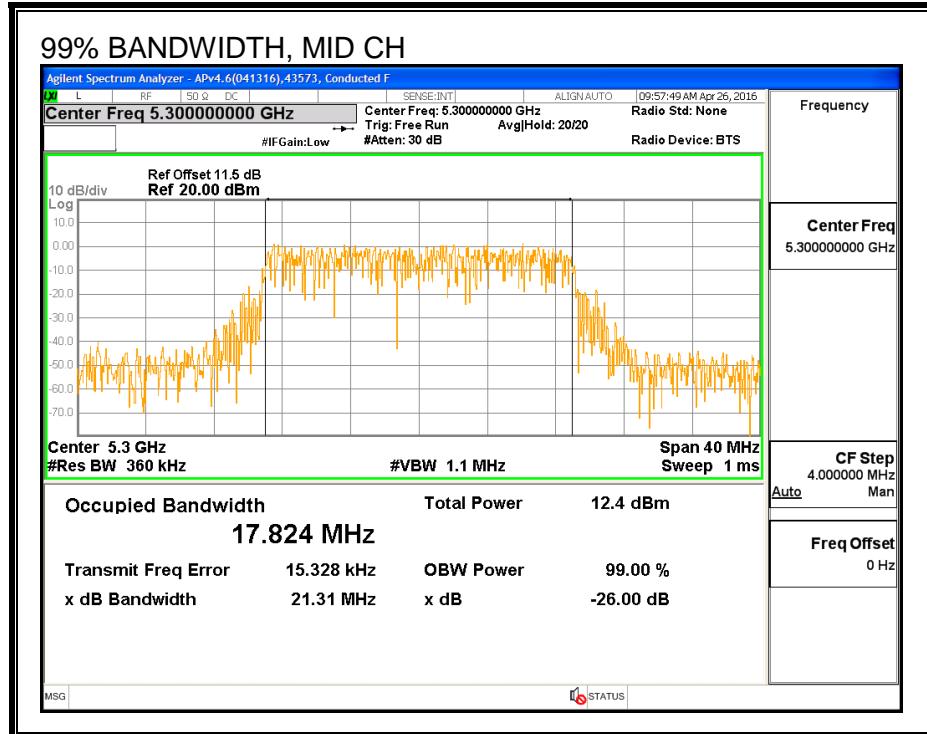
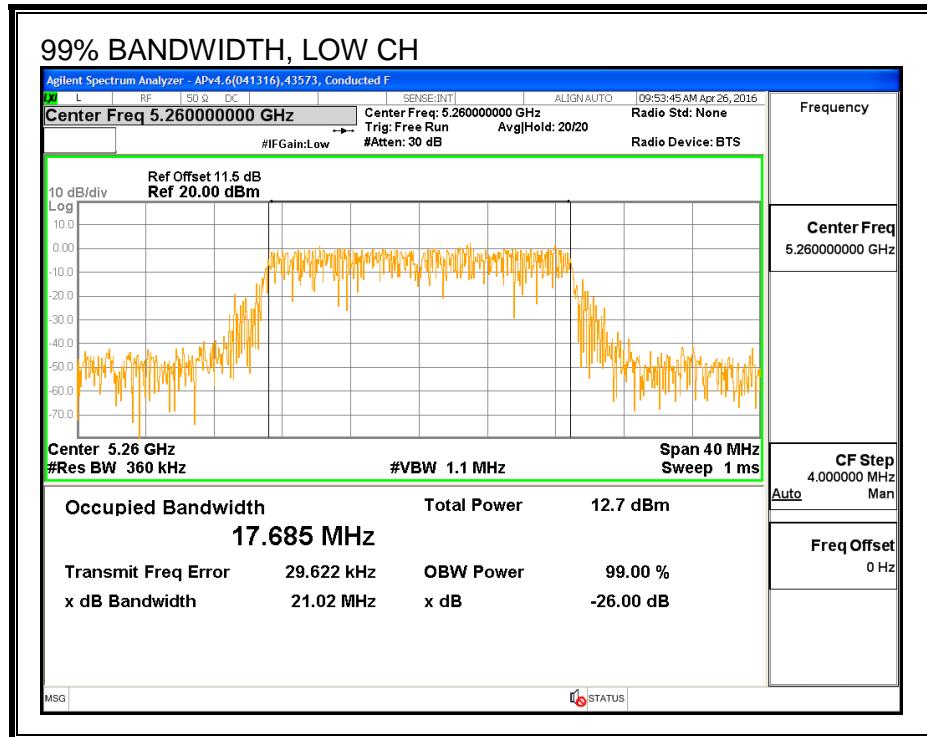
7.12.2. 99% BANDWIDTH

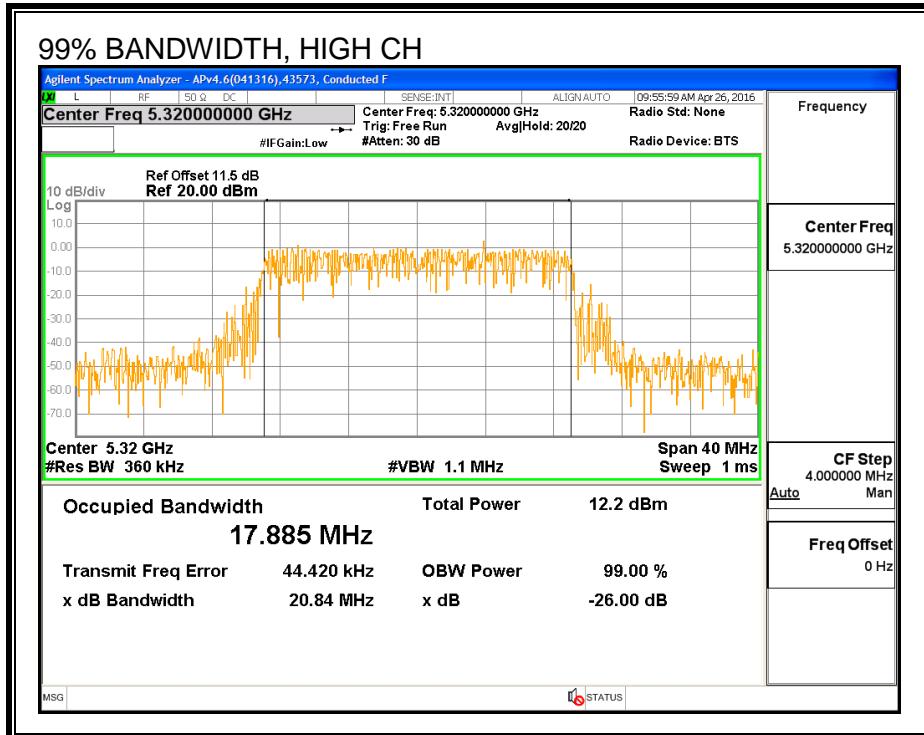
LIMITS

None; for reporting purposes only.

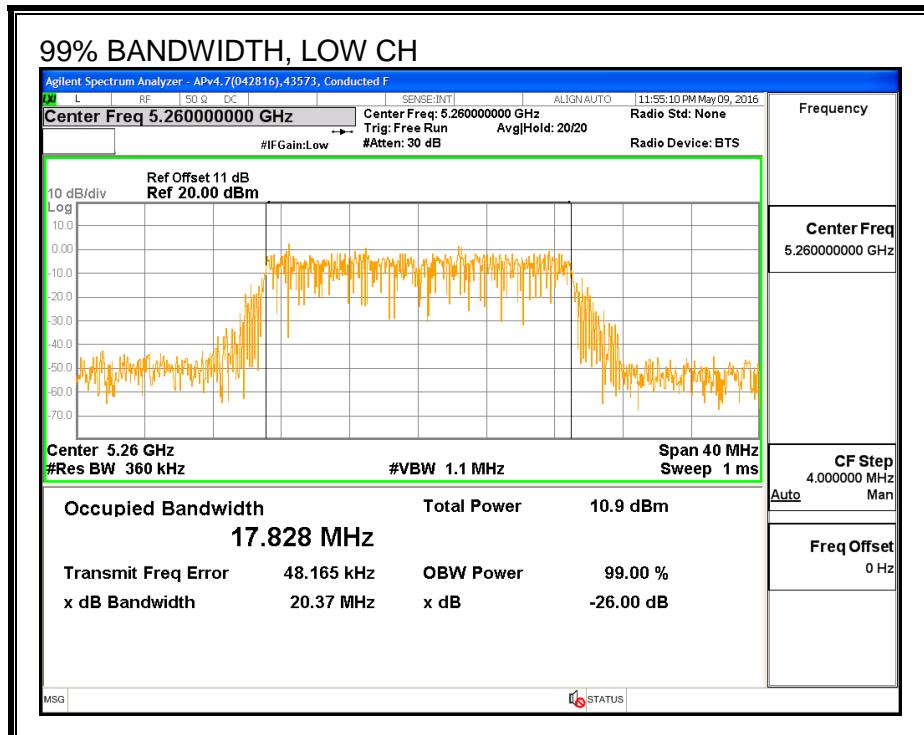
RESULTS

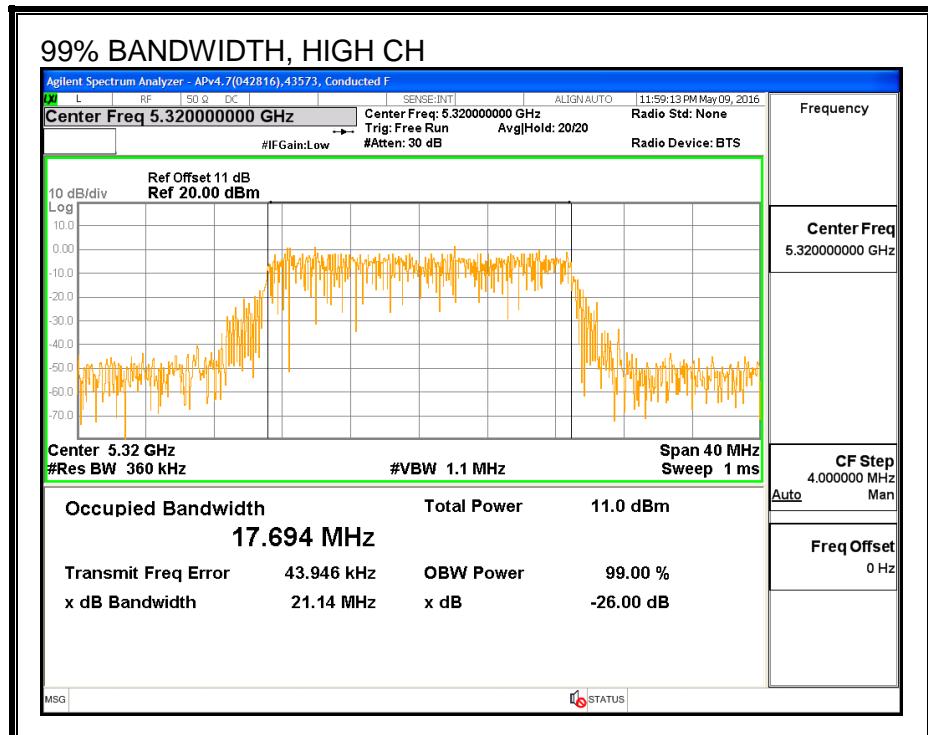
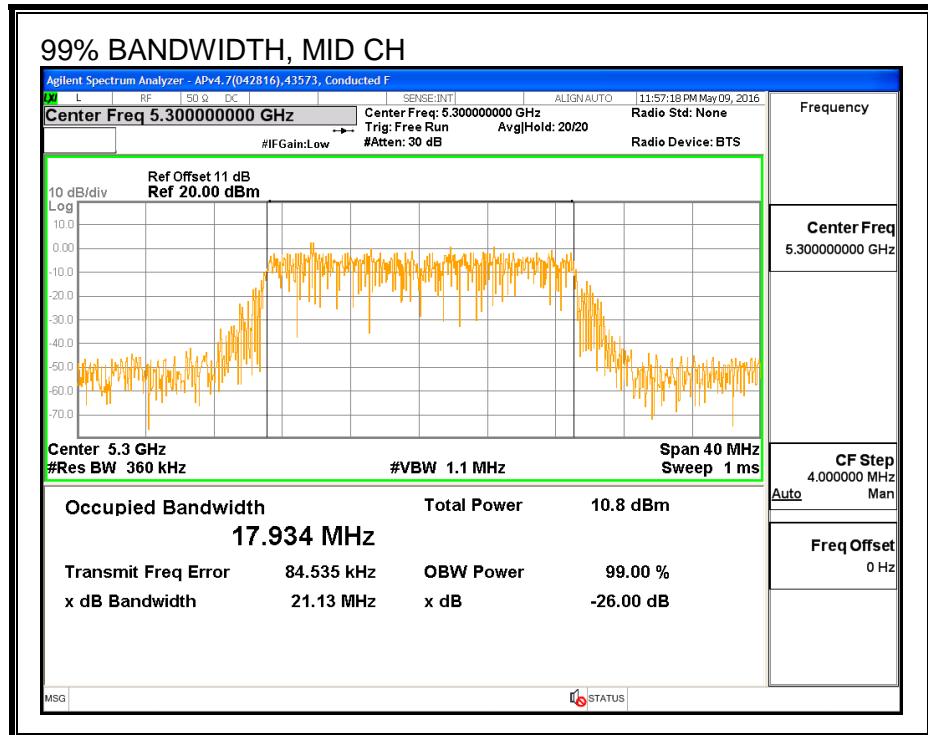
Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5260	17.685	17.828
Mid	5300	17.824	17.934
High	5320	17.885	17.694

99% BANDWIDTH, CHAIN 0



99% BANDWIDTH, CHAIN 1





7.12.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	6/10/16
-----	-------	-------	---------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5260	16.89	16.84	19.88
Mid	5300	16.96	16.85	19.92
High	5320	15.85	15.79	18.83

7.12.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-5.06	-5.08	-5.07

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-5.06	-5.08	-2.06

RESULTS

ID:	43573	Date:	6/10/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.71	17.685	-5.07	-2.06	23.48	11.00
Mid	5300	21.71	17.824	-5.07	-2.06	23.51	11.00
High	5320	21.69	17.694	-5.07	-2.06	23.48	11.00

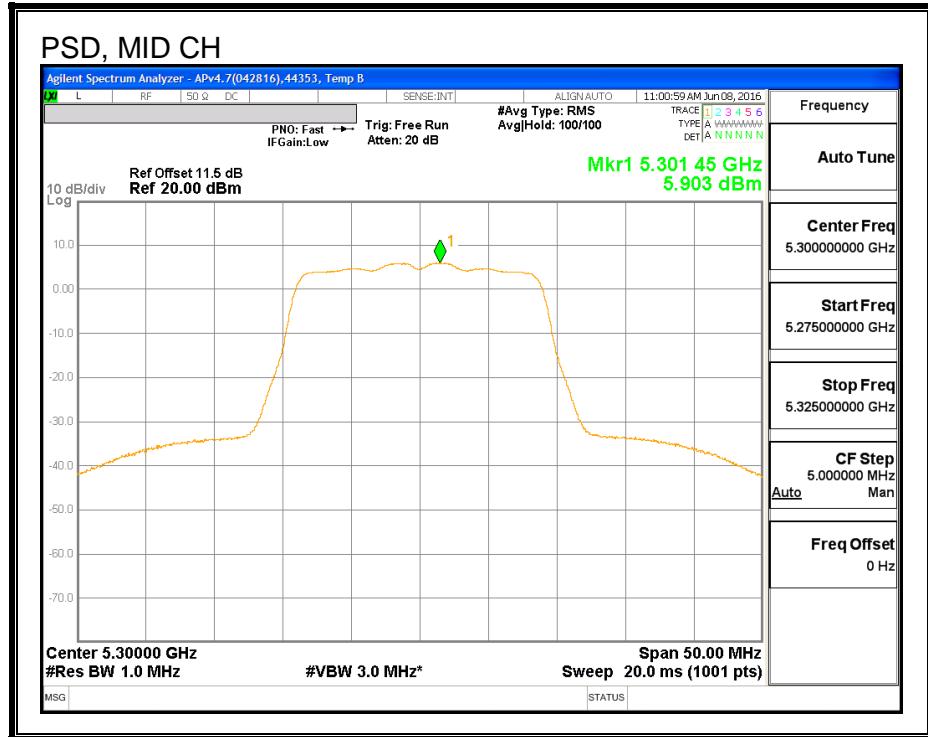
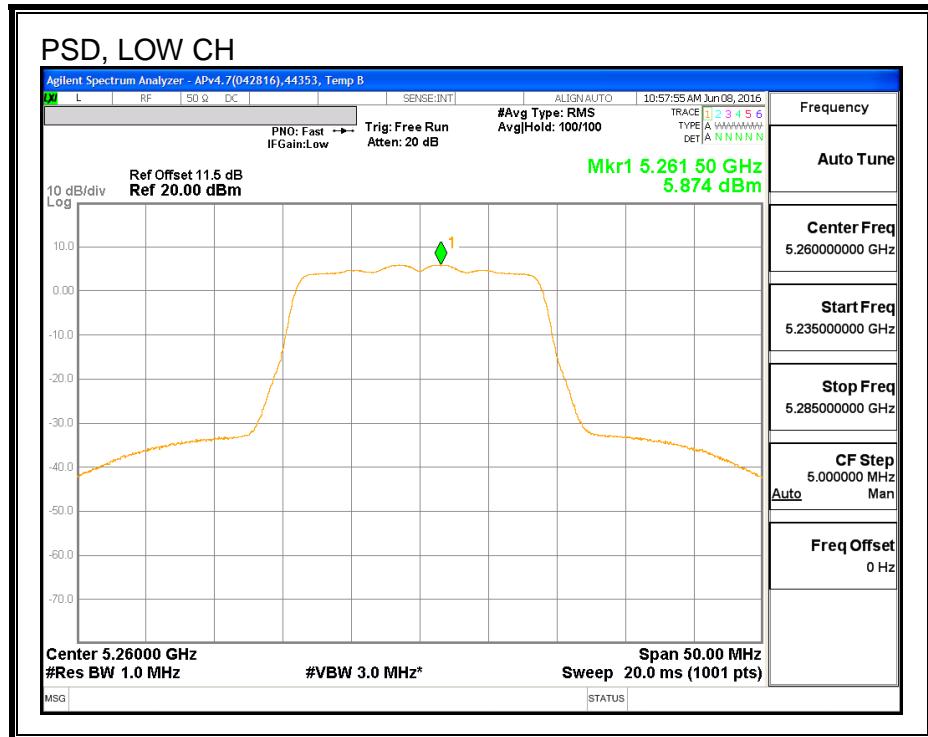
Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

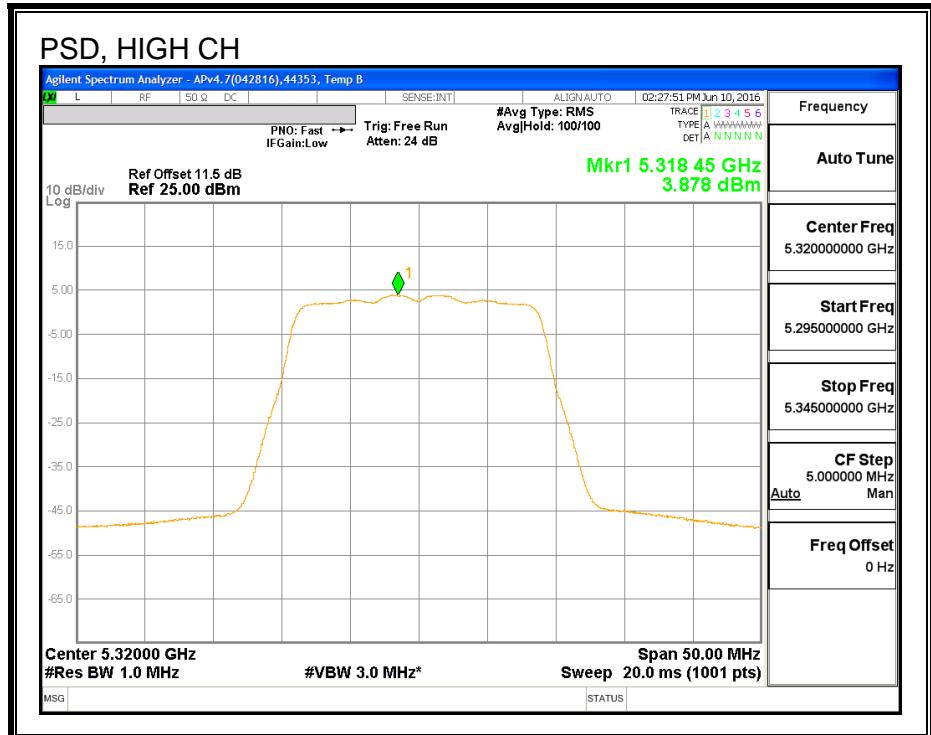
Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.89	16.84	19.88	23.48	-3.60
Mid	5300	16.96	16.85	19.92	23.51	-3.59
High	5320	15.85	15.79	18.83	23.48	-4.65

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.87	5.85	8.87	11.00	-2.13
Mid	5300	5.90	5.91	8.91	11.00	-2.09
High	5320	3.88	3.87	6.88	11.00	-4.12

PSD, CHAIN 0



PSD, CHAIN 1

