



**8.29.2. 99% BANDWIDTH**



**LIMITS**



None; for reporting purposes only.



**RESULTS**



<b>Channel</b>	<b>Frequency</b>	<b>99% BW UAT 2 (MHz)</b>	<b>99% BW LAT 3 (MHz)</b>
Low	5510	36.284	36.057
Mid	5550	36.152	36.140
Mid	5590	36.233	36.347
High	5670	36.307	36.243
142	5710	36.239	36.051

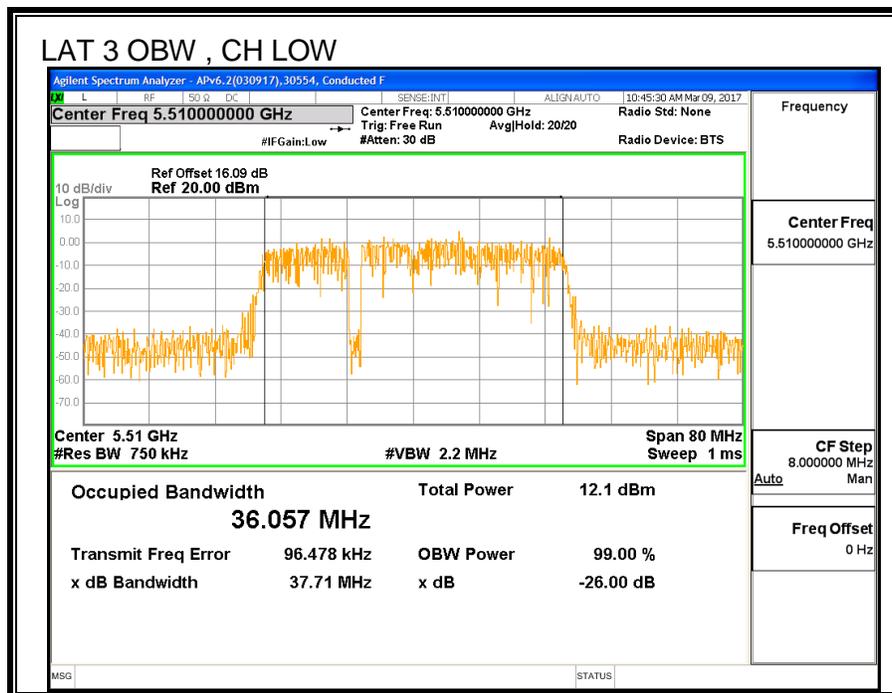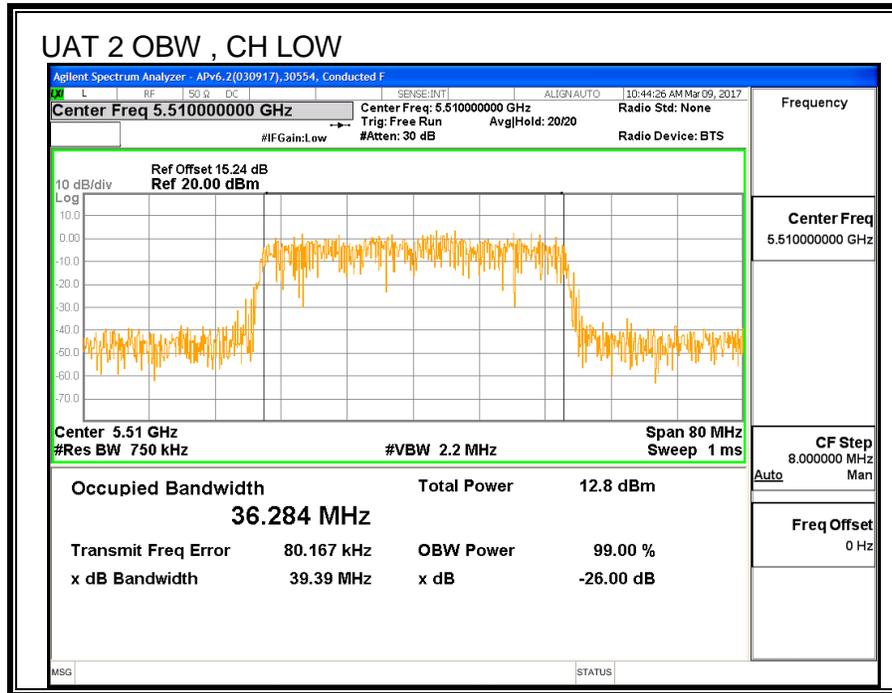

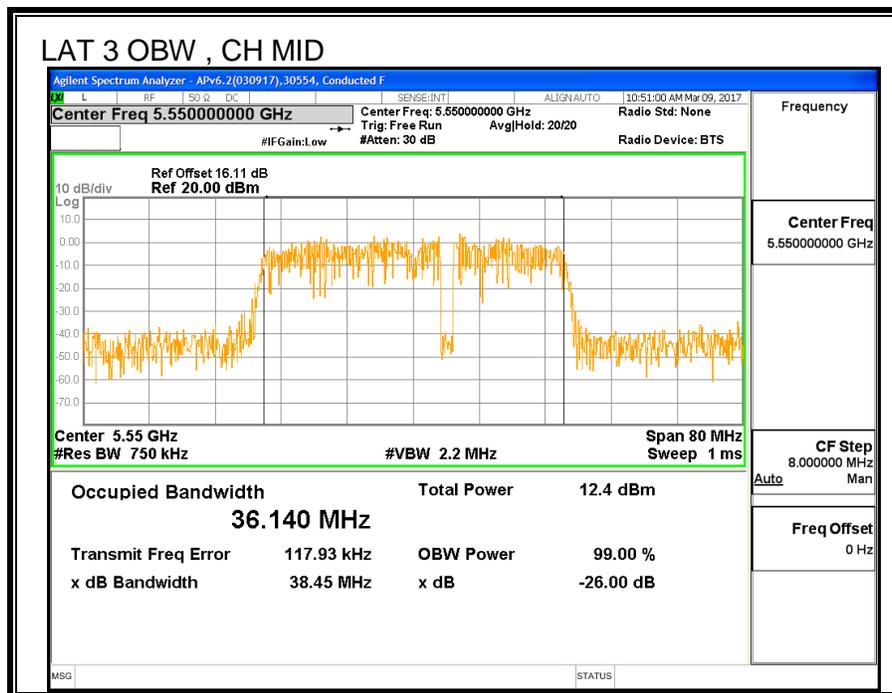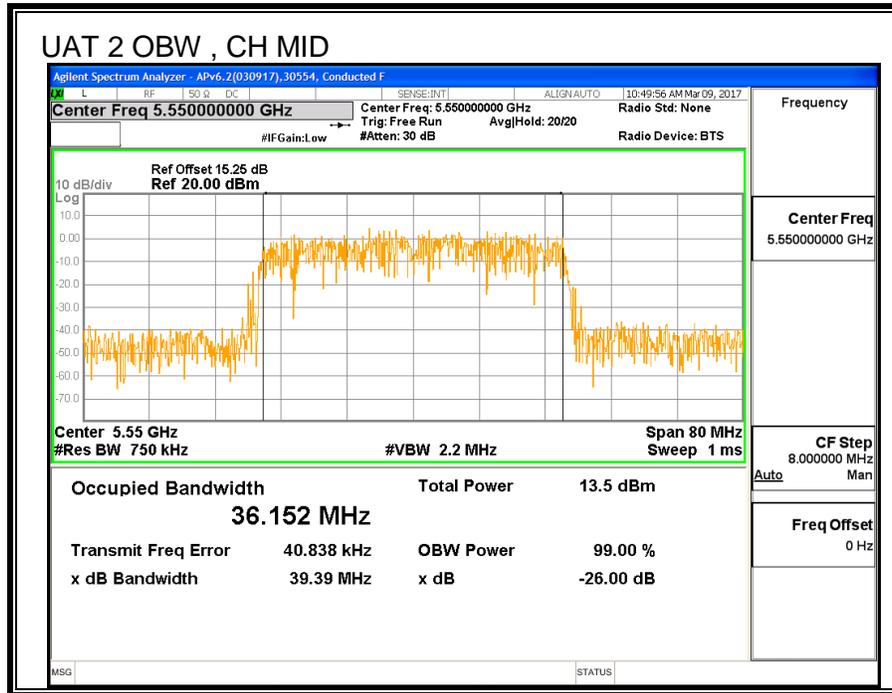

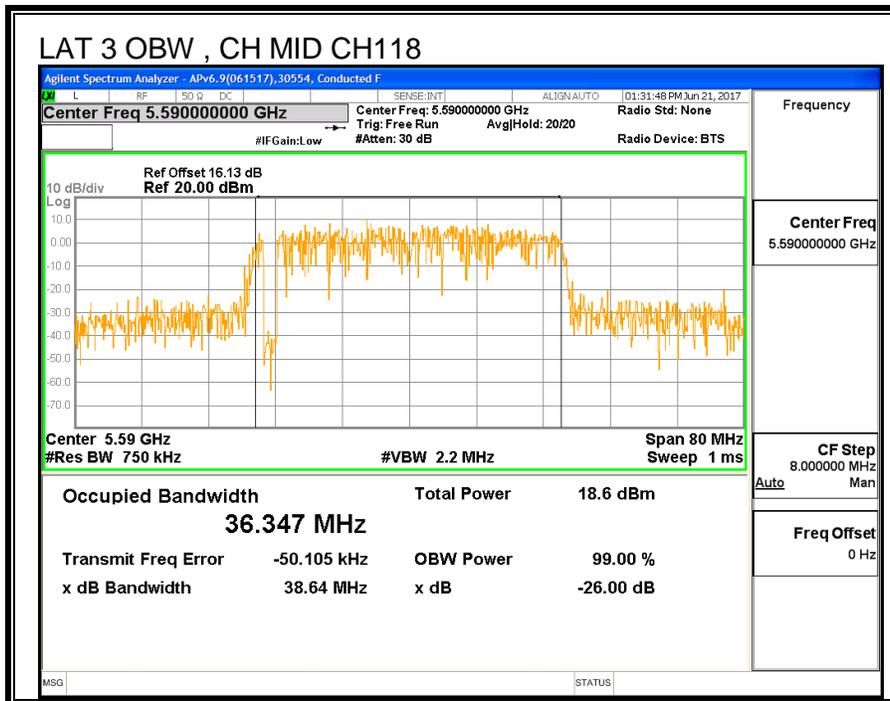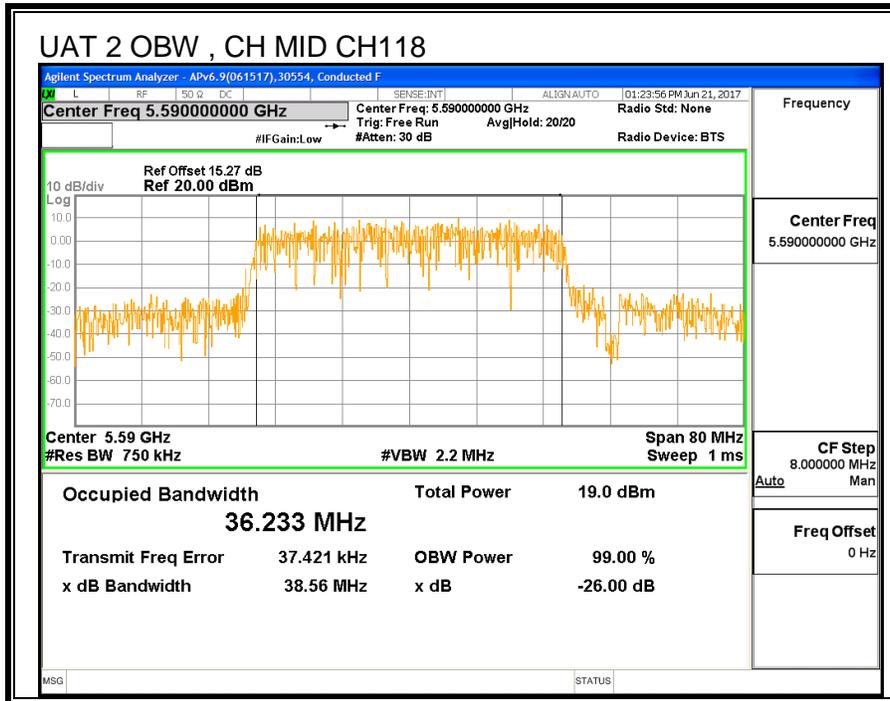

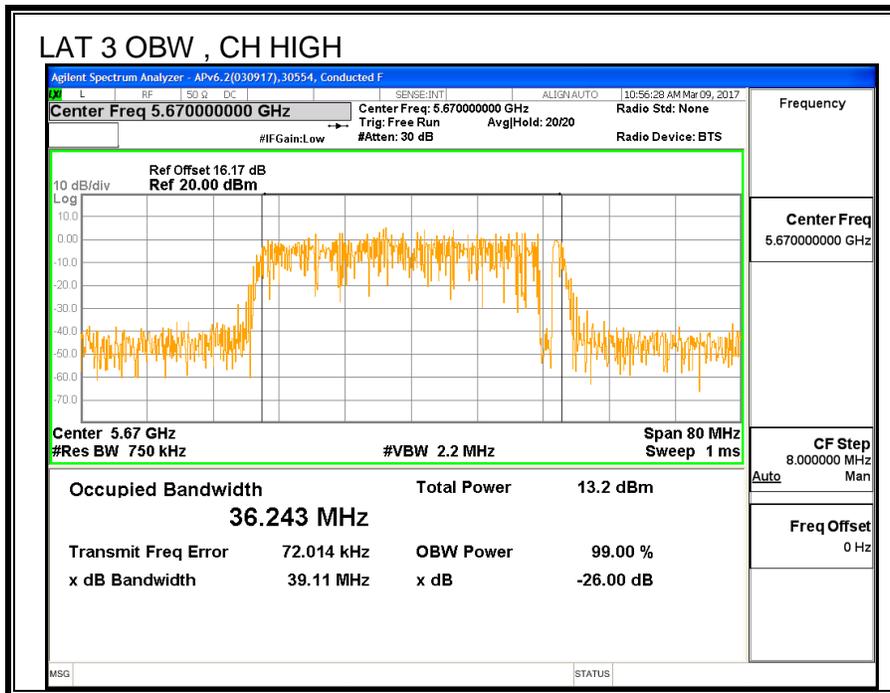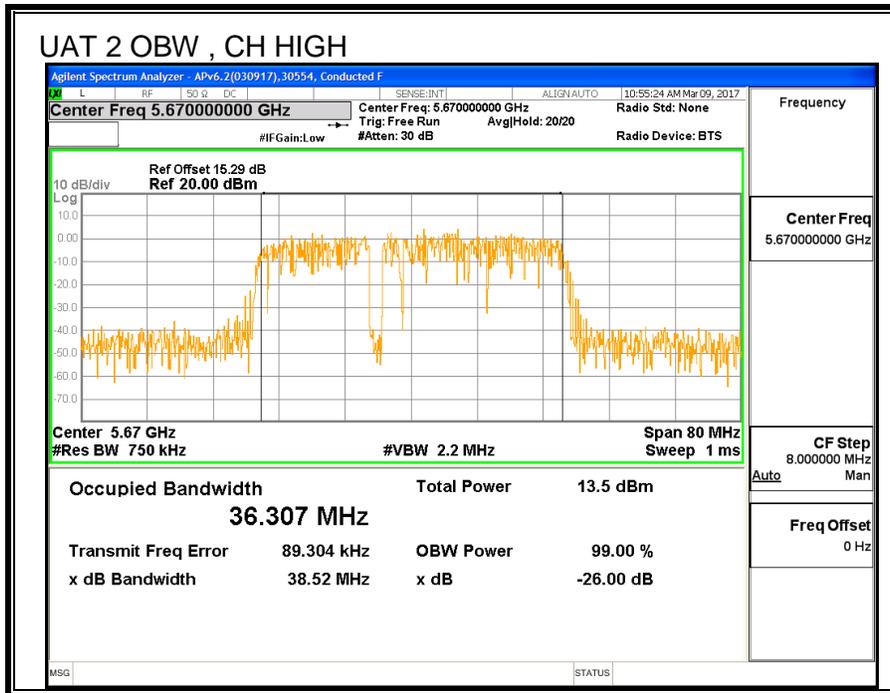

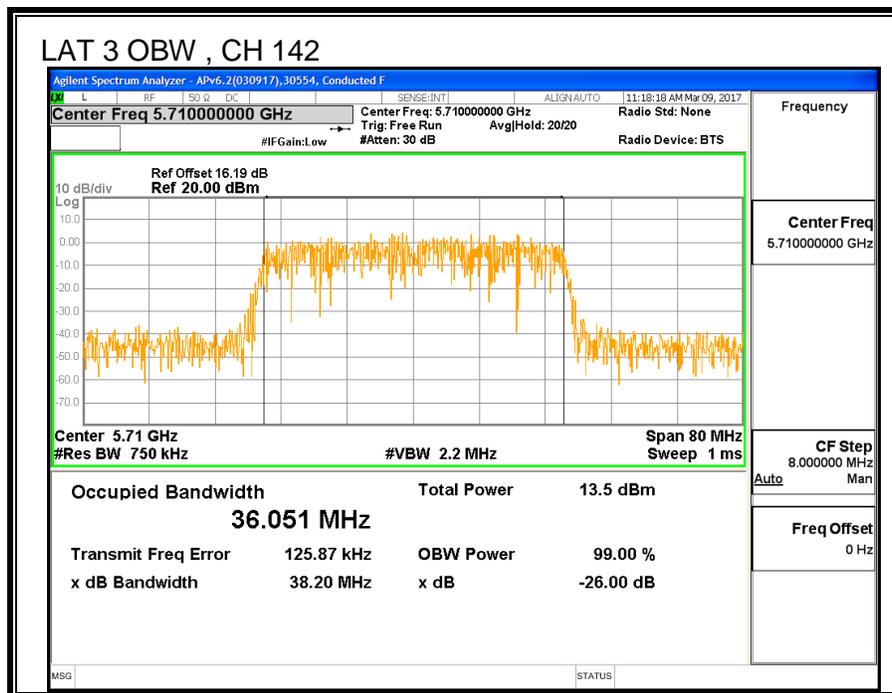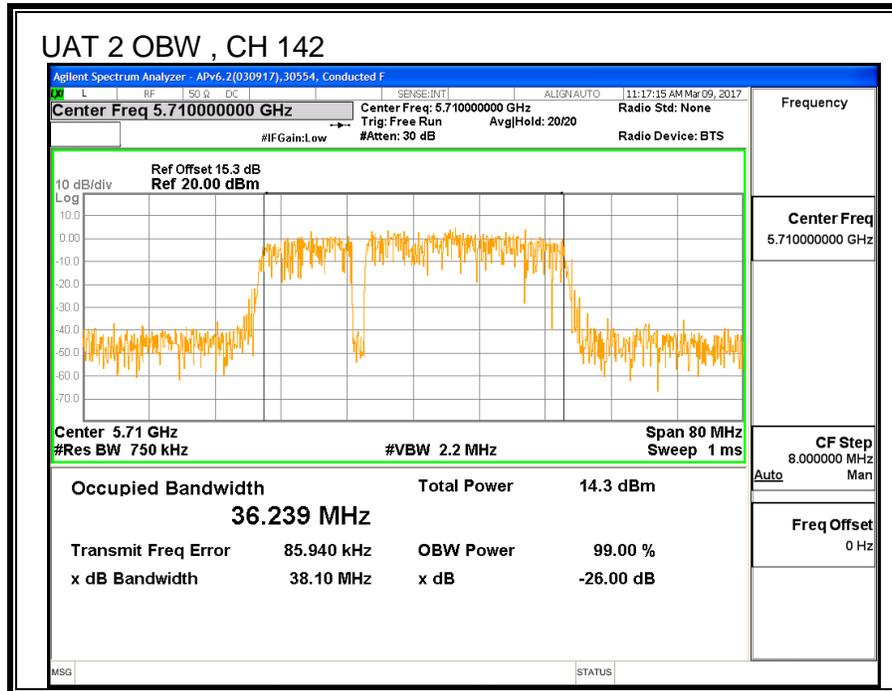

**8.29.3. AVERAGE POWER**

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

**LIMITS**

None; for reporting purposes only.

**TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

**RESULTS**

Channel	Frequency	Power UAT 2 (dBm)	Power LAT 3 (dBm)	Total Power (dBm)
Low	5510	14.35	14.45	17.41
Mid	5550	18.40	18.36	21.39
Mid	5590	19.36	19.28	22.33
High	5670	15.89	15.73	18.82
142	5710	19.32	19.40	22.37

---

## 8.29.4. OUTPUT POWER AND PPSD

### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

PSD Test Procedure: KDB 789033 D02 v01r04 Section F (Method SA-2)

**DIRECTIONAL ANTENNA GAIN**

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>UAT 2 Antenna Gain (dBi)</b>	<b>LAT 3 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-0.75	-0.96	-0.85

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>UAT 2 Antenna Gain (dBi)</b>	<b>LAT 3 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
-0.75	-0.96	2.16

**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.20	36.057	-0.85	2.16	24.00	11.00
Mid	5550	40.00	36.14	-0.85	2.16	24.00	11.00
Mid	5590	40.00	36.14	-0.85	2.16	24.00	11.00
High	5670	40.20	36.243	-0.85	2.16	24.00	11.00



<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**



Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	14.35	14.45	17.41	24.00	-6.59
Mid	5550	18.40	18.36	21.39	24.00	-2.61
Mid	5590	19.36	19.28	22.33	24.00	-1.67
High	5670	15.89	15.73	18.82	24.00	-5.18



**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/MHz)	LAT 3 Meas PSD (dBm/MHz)	Total Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)	PSD Margin (dB)
Low	5510	1.22	1.86	4.66	11.00	-6.34
Mid	5550	6.04	6.57	9.42	11.00	-1.58
Mid	5590	5.06	5.28	8.28	12.00	-3.72
High	5670	3.41	4.13	6.89	11.00	-4.11

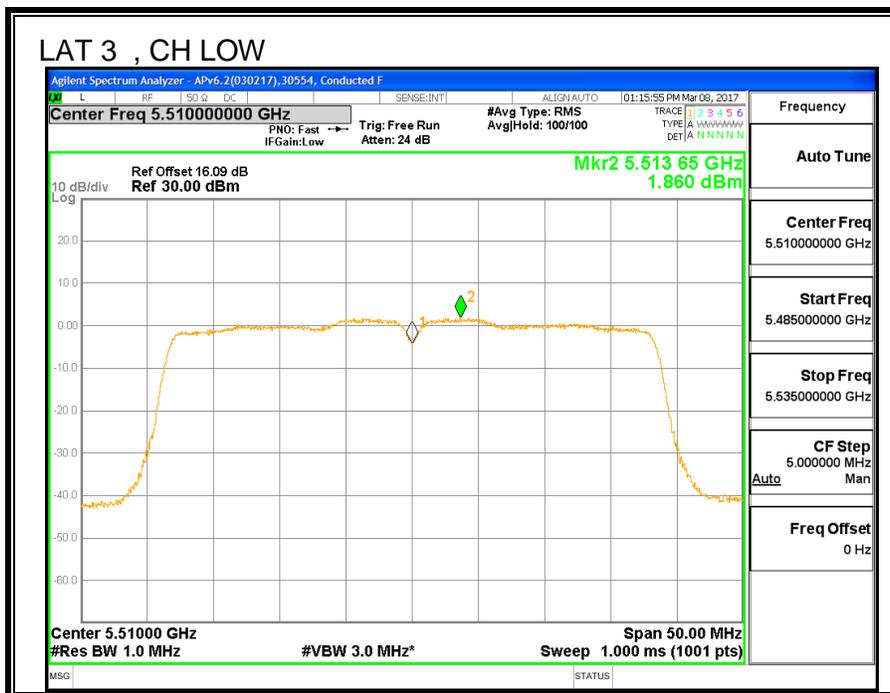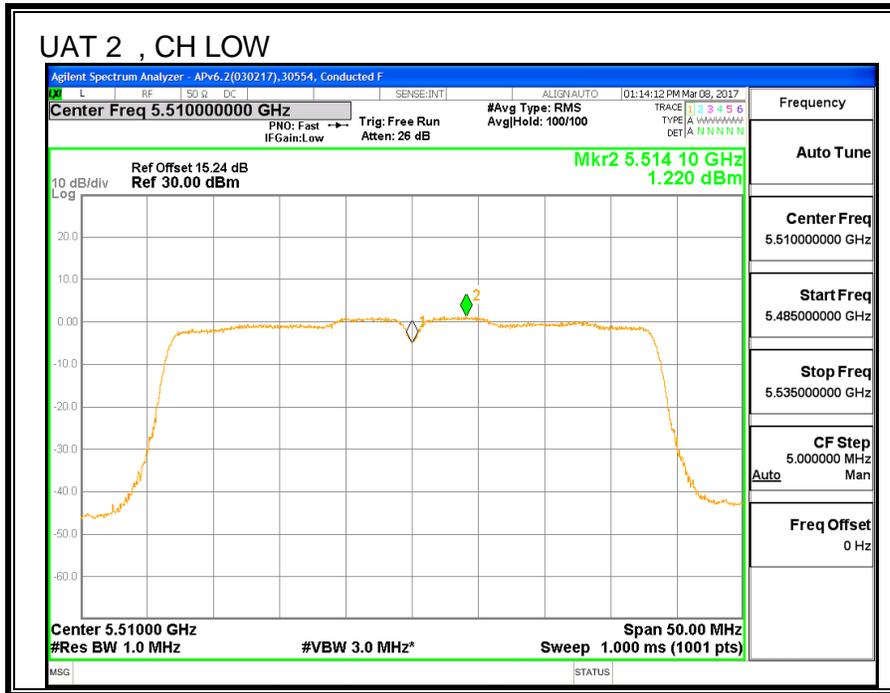

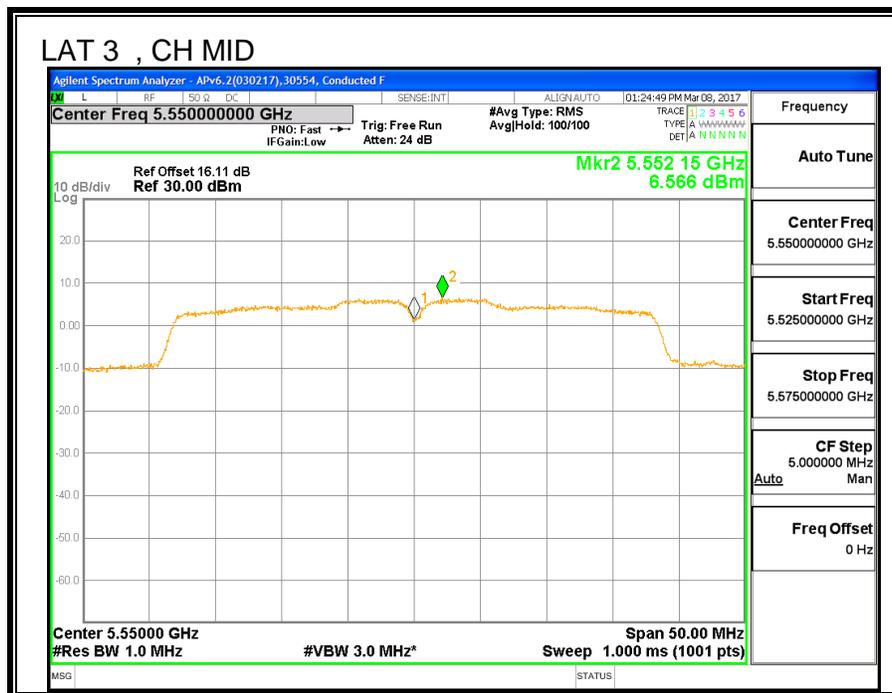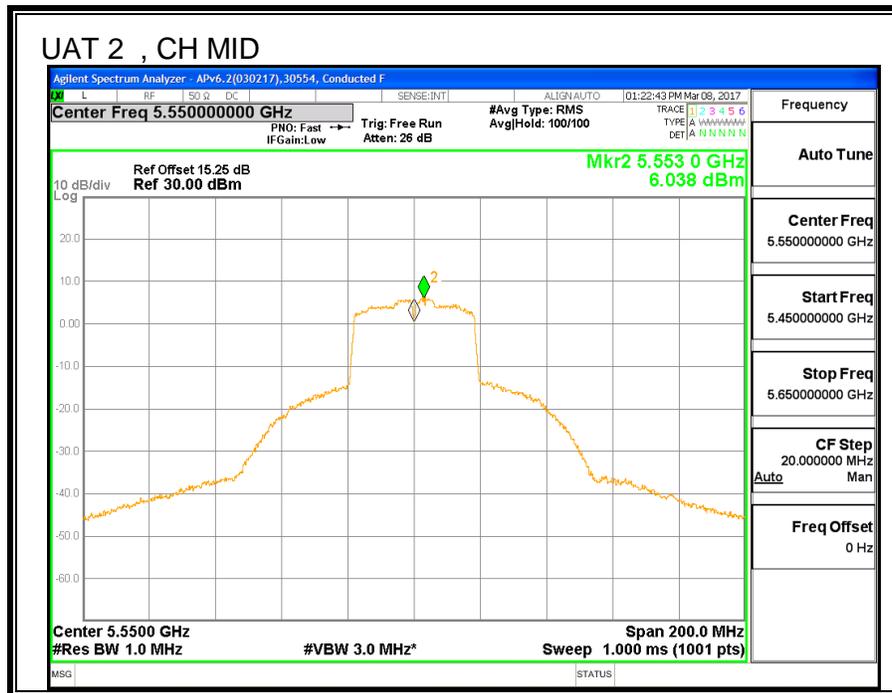

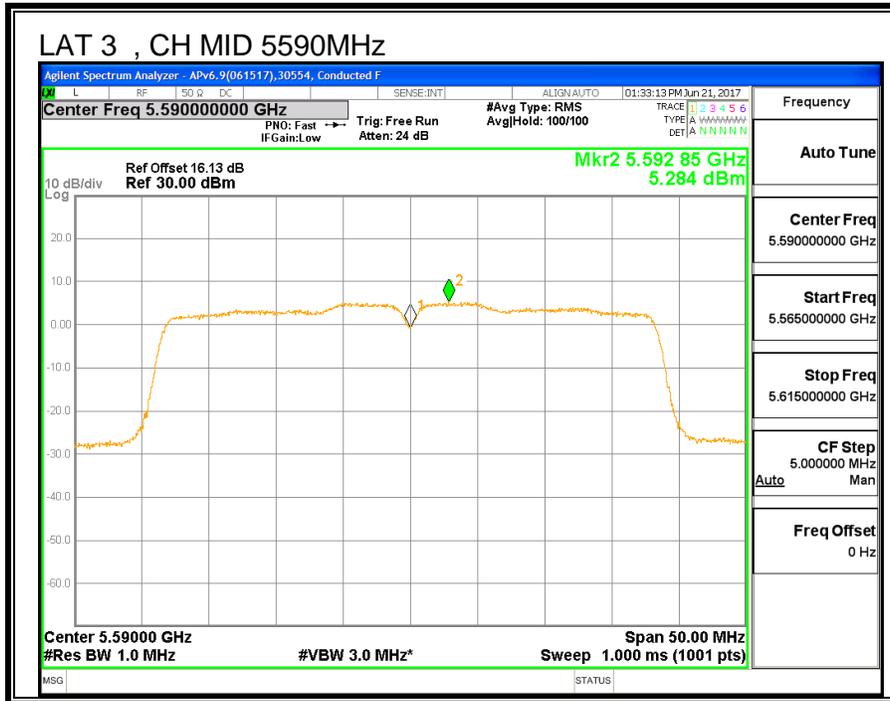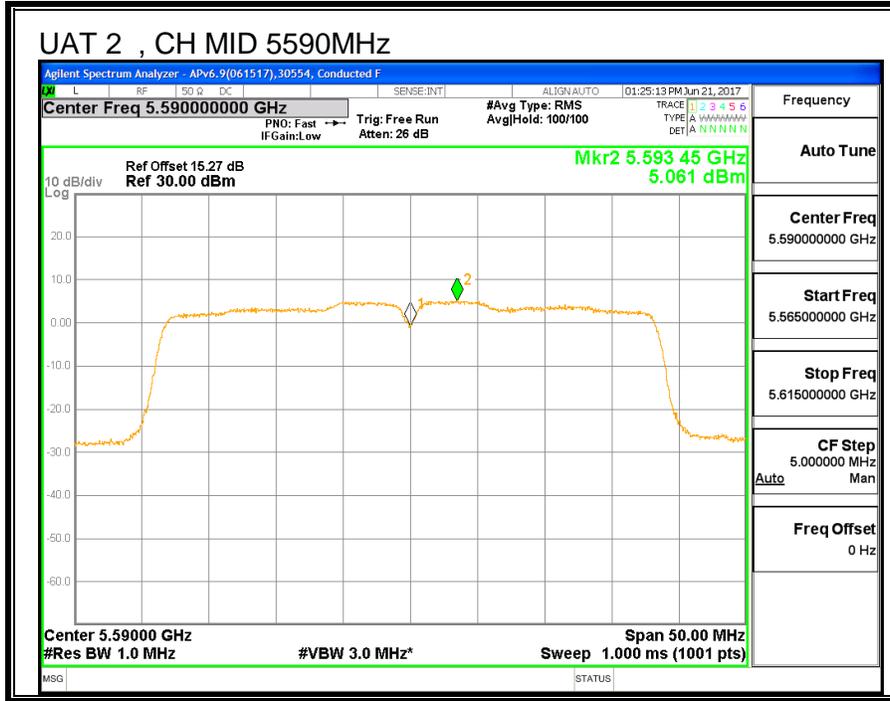

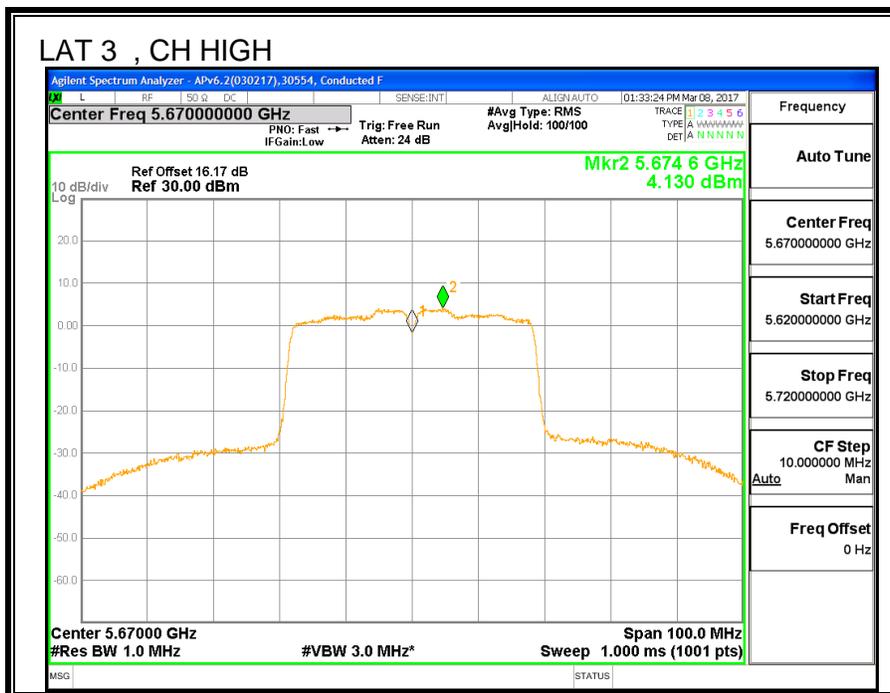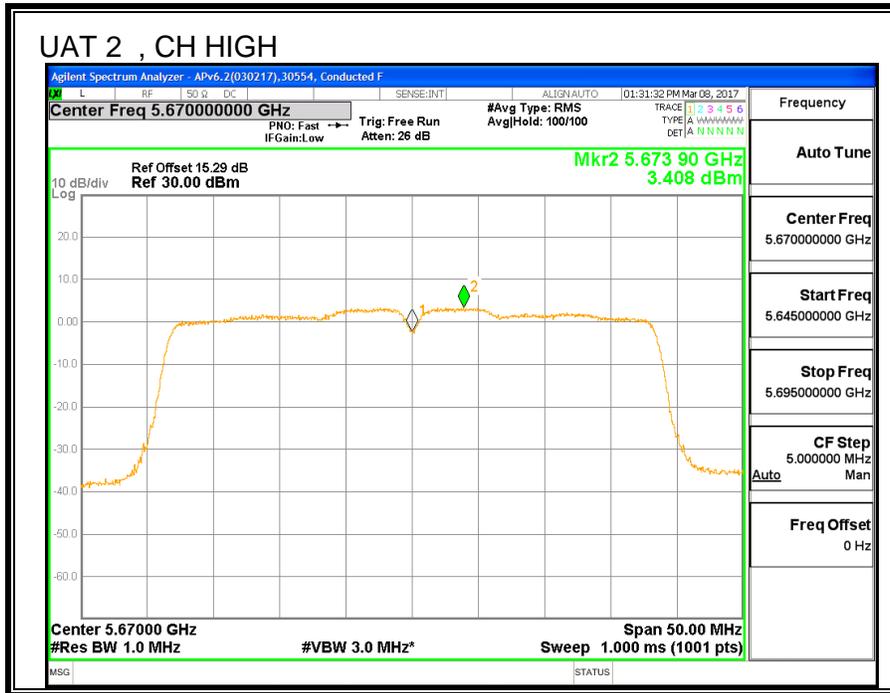

**8.30. 11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142**

**8.30.1. OUTPUT POWER AND PSD**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.10	-0.85	2.16	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	18.68	18.52	21.71	24.00	-2.29


**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/MHz)	LAT 3 Meas PSD (dBm/MHz)	Total Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)	PSD Margin (dB)
142	5710	5.72	5.43	8.69	11.00	-2.31


**OUTPUT POWER, UAT 2**

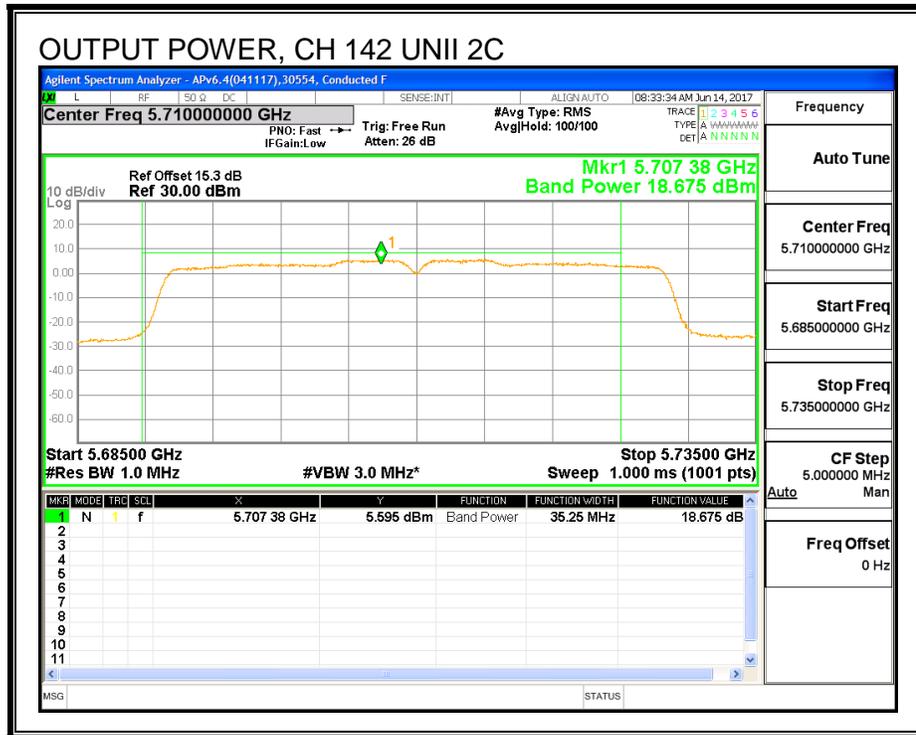


**OUTPUT POWER, LAT 3**

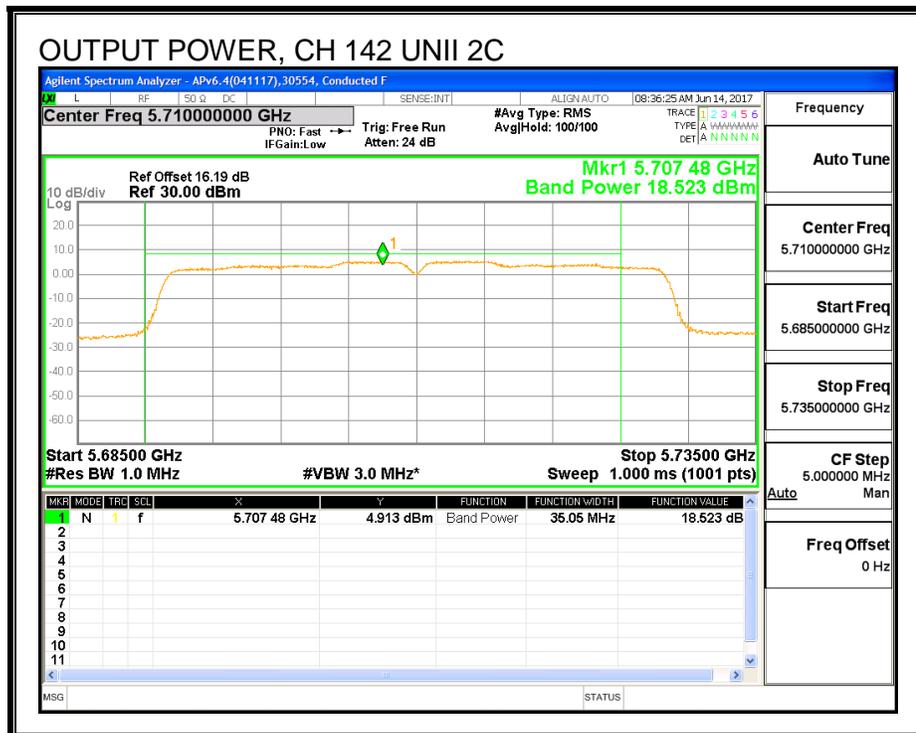

**PSD, UAT 2**

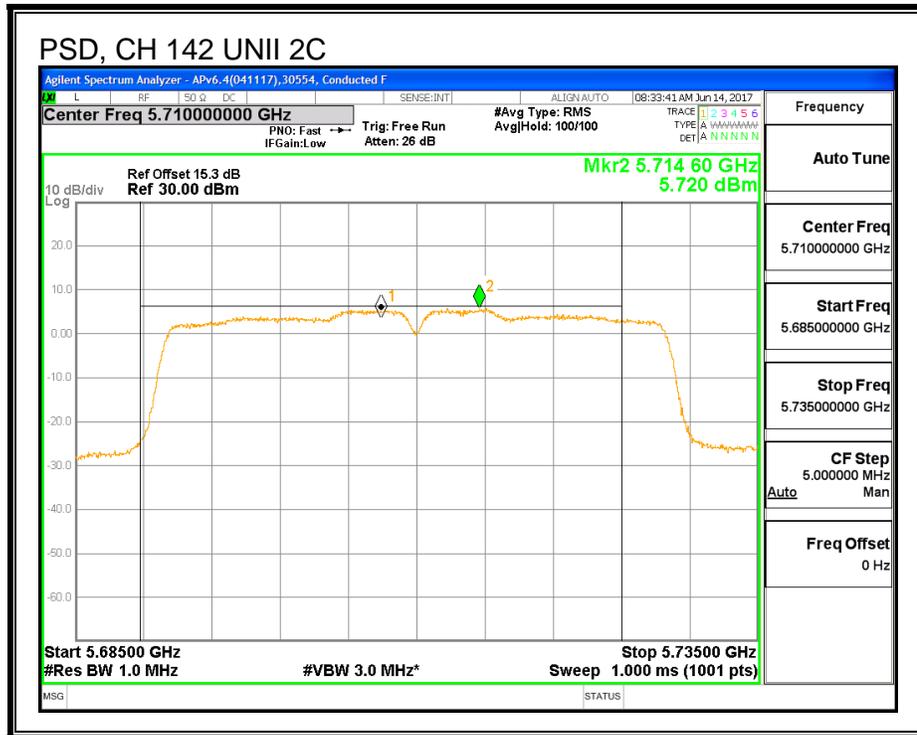

**PSD, LAT 3**

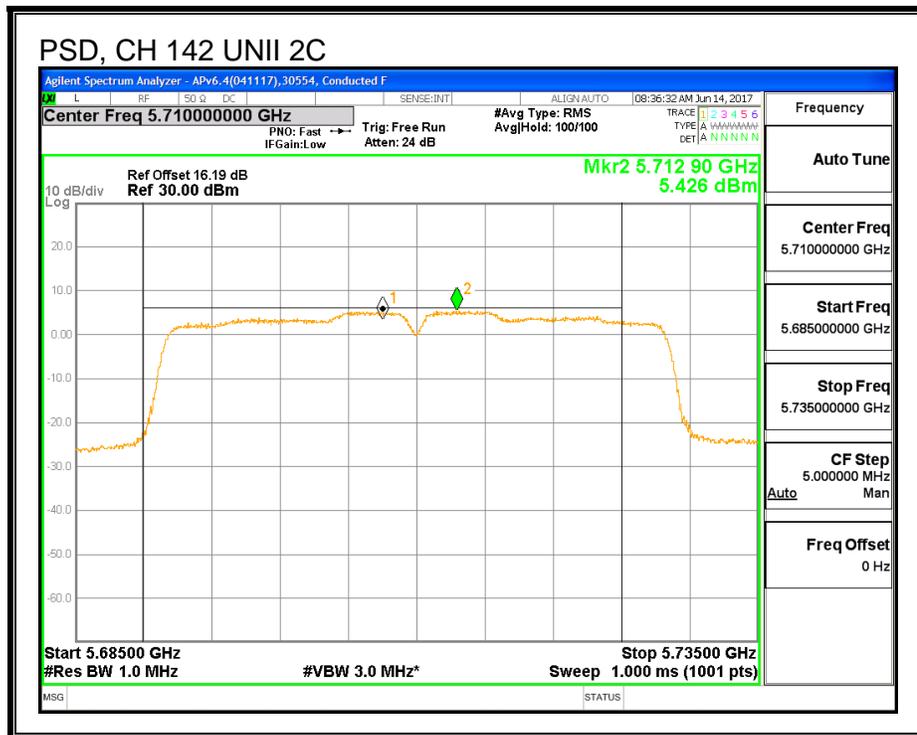

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.10	-0.05	2.92	30.00	30.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	7.53	7.33	10.54	30.00	-19.46


**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	0.42	0.32	3.48	30.00	-26.52


**OUTPUT POWER, UAT 2**

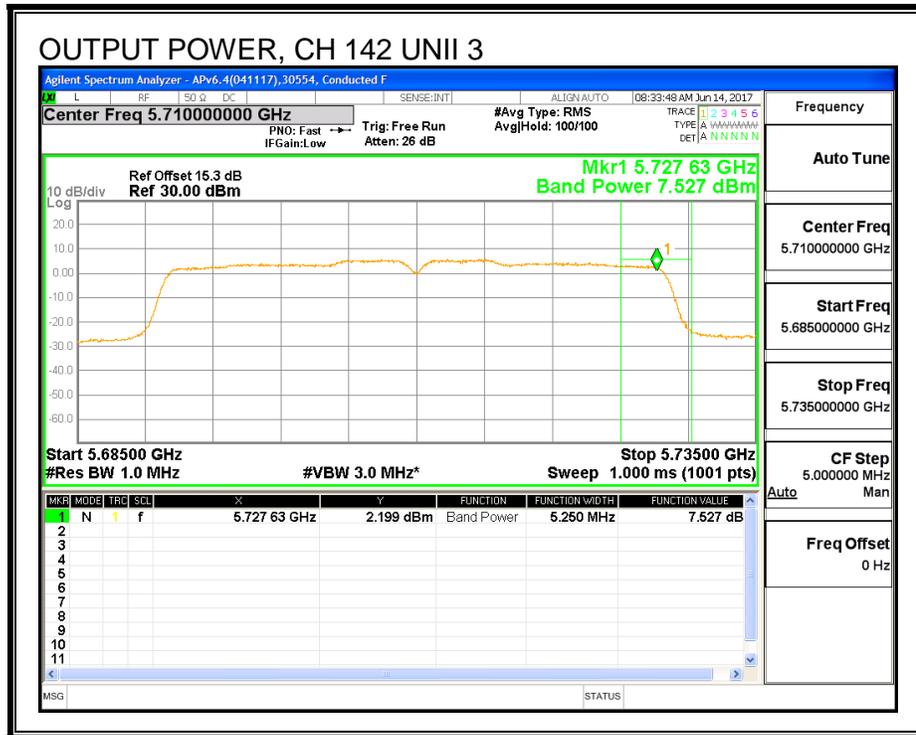


**OUTPUT POWER, LAT 3**

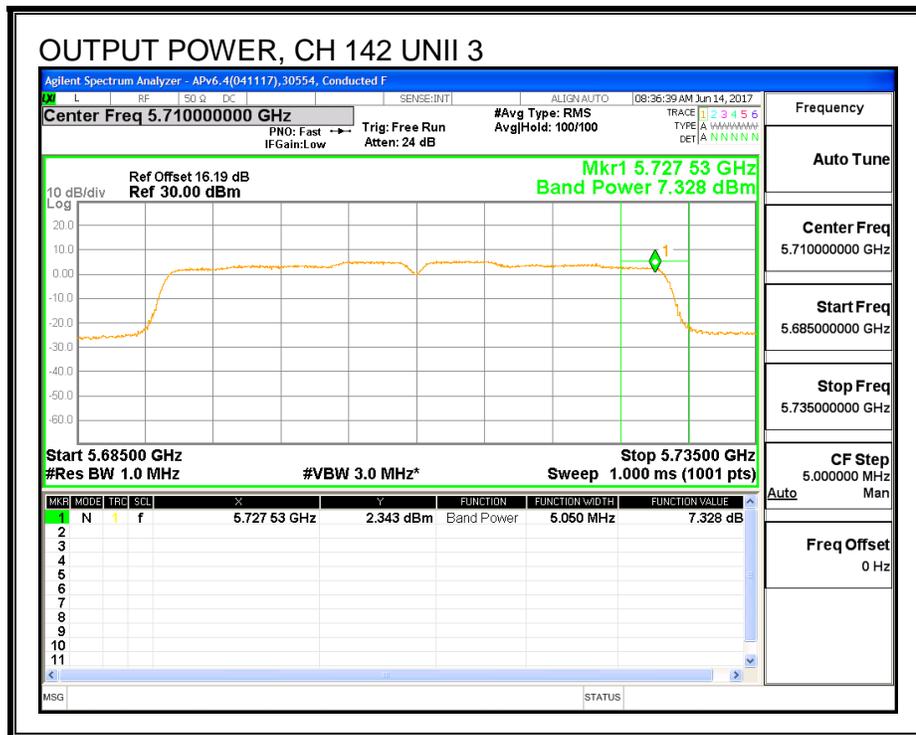

**PSD, UAT 2**

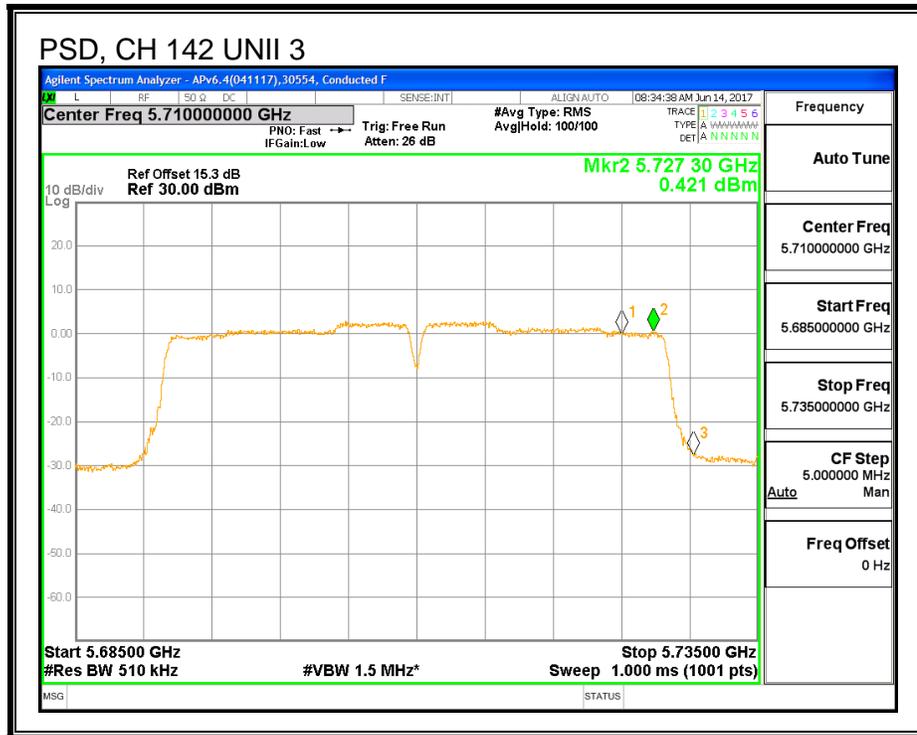

**PSD, LAT 3**

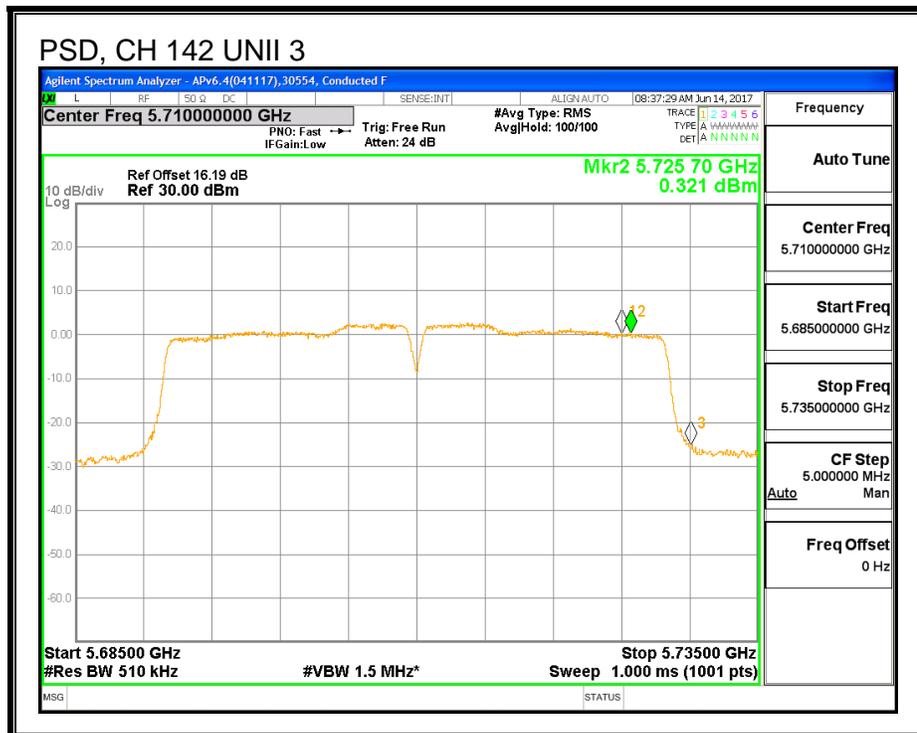

**8.31. 11ac HT80 UAT 2 SISO MODE IN THE 5.6GHz BAND**



**8.31.1. 26 dB BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5530	82.6
High	5610	82.2
138	5690	82.2

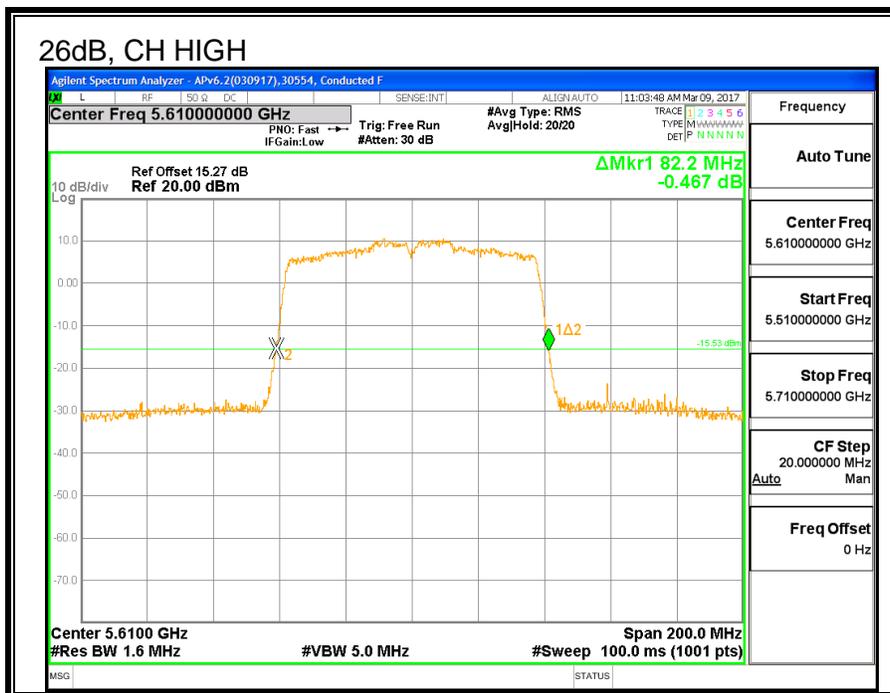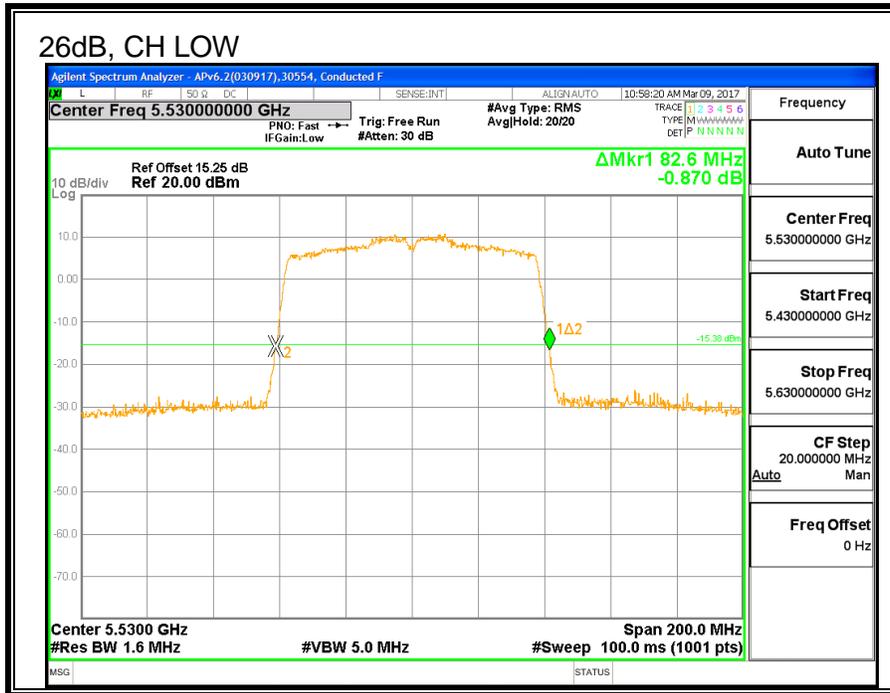

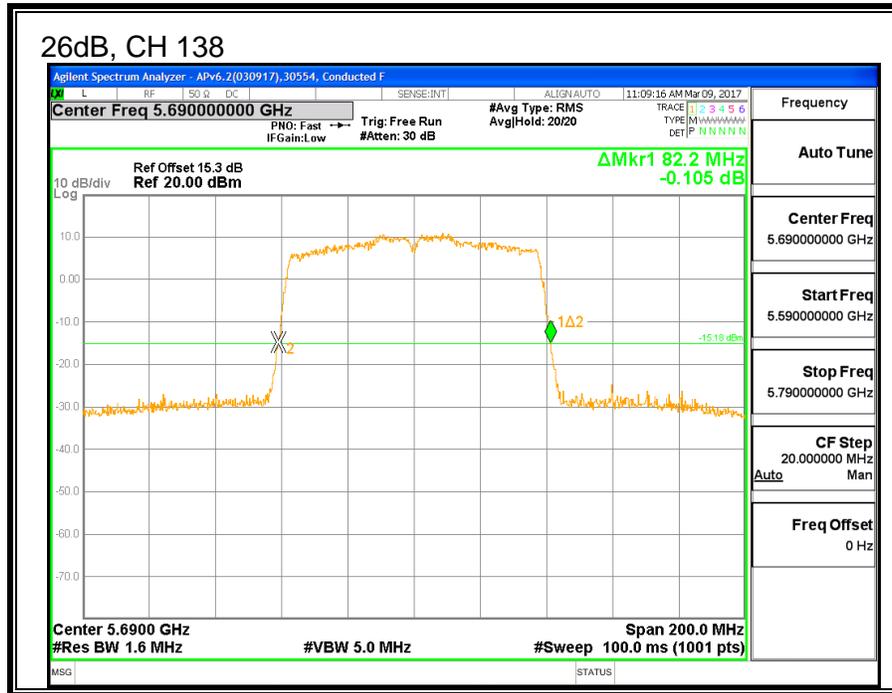



**8.31.2. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>99% BW UAT 2 (MHz)</b>
Low	5530	75.468
High	5610	74.911
138	5690	75.671

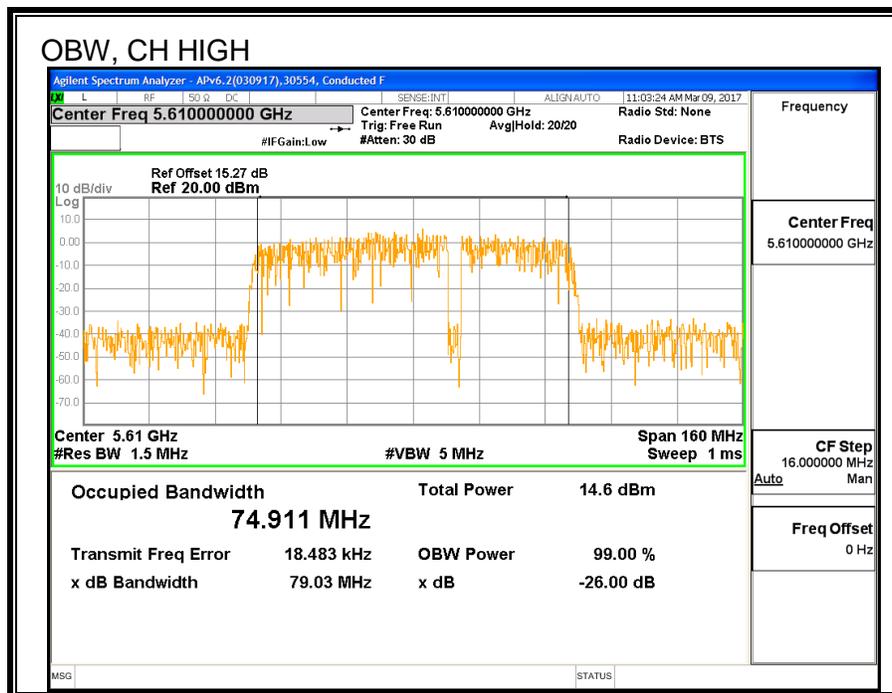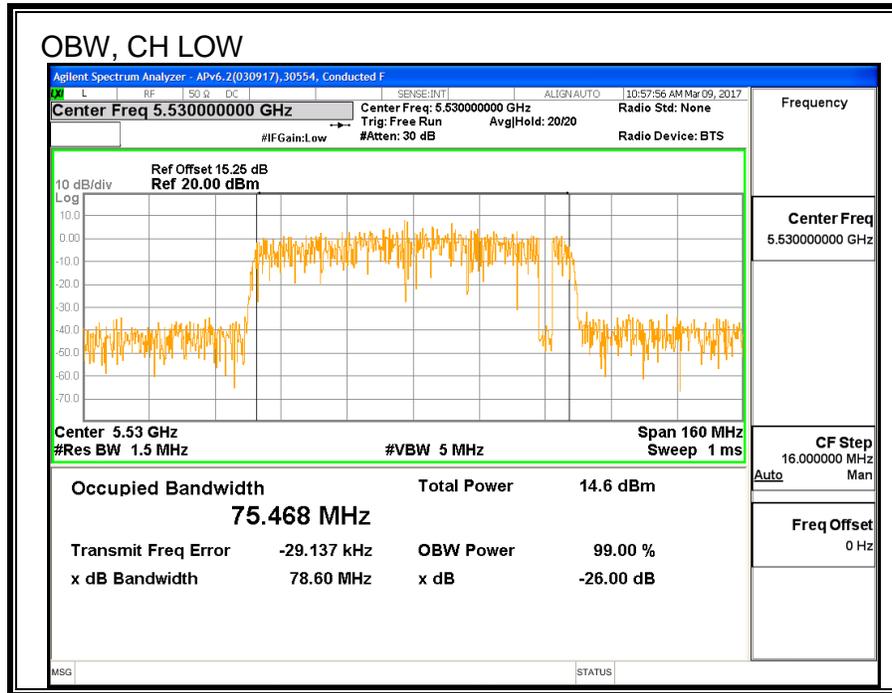

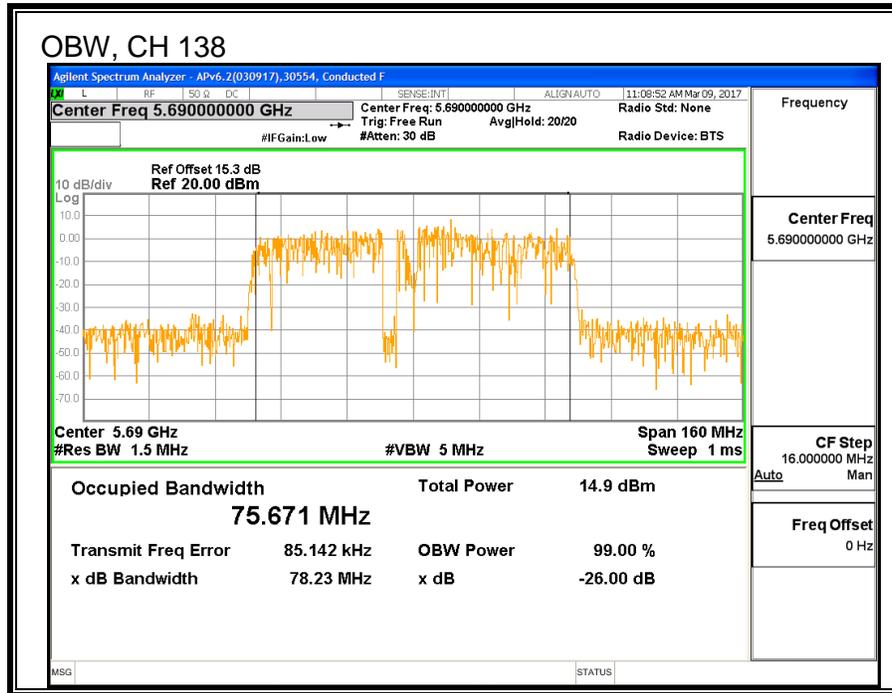

**8.31.3. AVERAGE POWER**

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

**LIMITS**

None; for reporting purposes only.

**TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>Power UAT 2 (dBm)</b>
Low	5530	14.78
High	5610	18.91
138	5690	18.75

---

### 8.31.4. OUTPUT POWER AND PPSD

#### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

PSD Test Procedure: KDB 789033 D02 v01r04 Section F (Method SA-2)

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.60	75.47	-0.75	24.00	11.00
Mid	5610	82.20	74.91	-0.75	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	14.78	14.78	24.00	-9.22
Mid	5610	18.91	18.91	24.00	-5.09

**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/MHz)	LAT 3 Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)	PSD Margin (dB)
Low	5530	-0.61	-0.41	11.00	-11.41
Mid	5610	4.10	4.30	11.00	-6.70

**PSD**

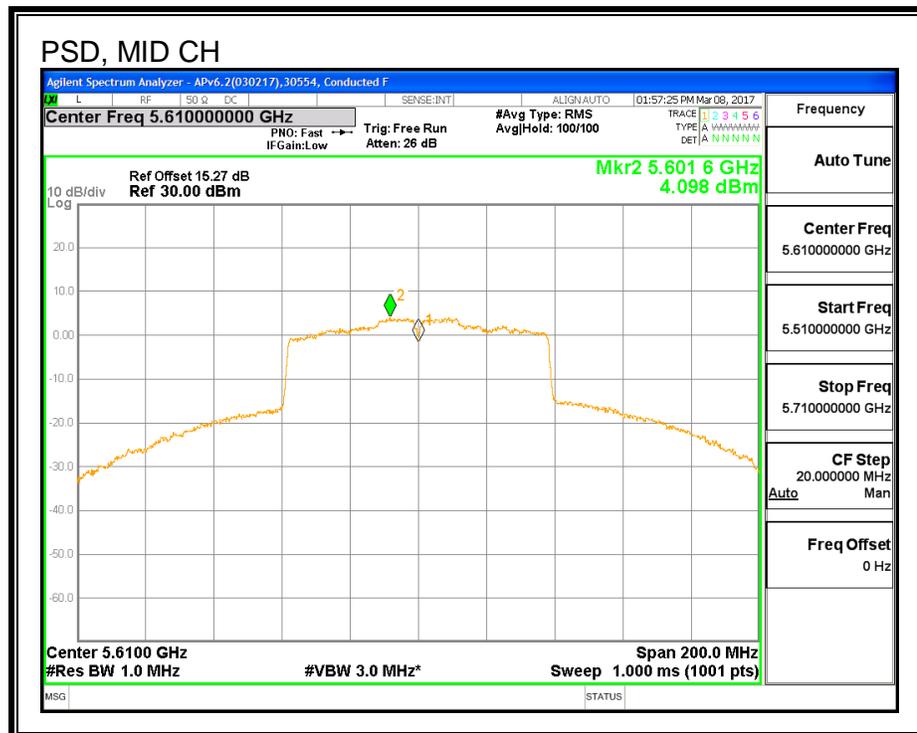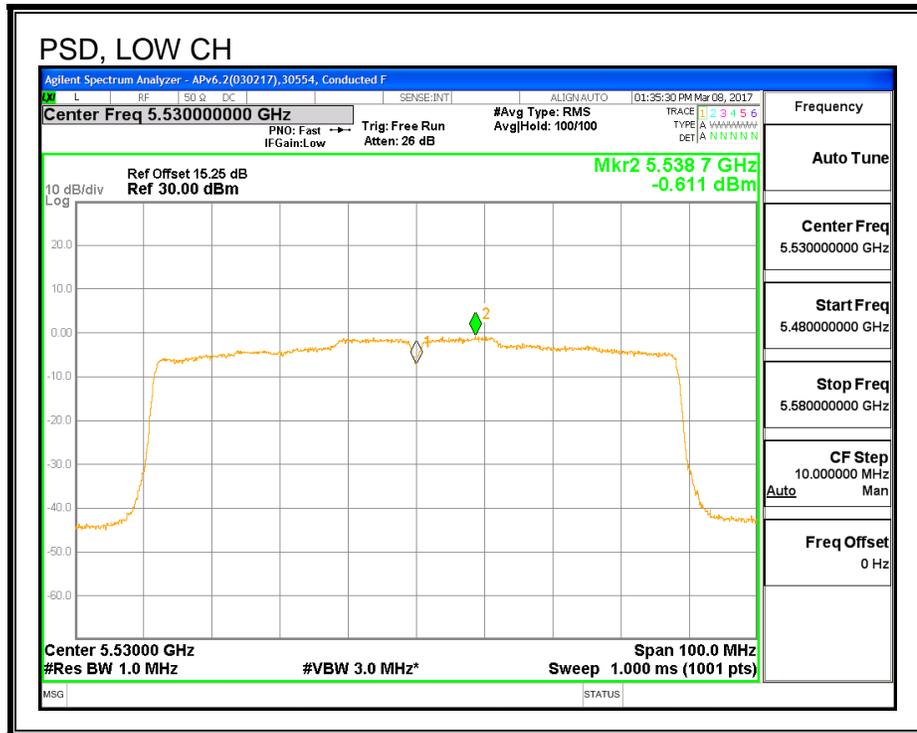

**8.31.5. STRADDLE CHANNEL 138 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	82.20	-0.75	-0.75	24.00	11.00



<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	18.27	18.47	24.00	-5.53

**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	1.92	2.12	11.00	-8.88

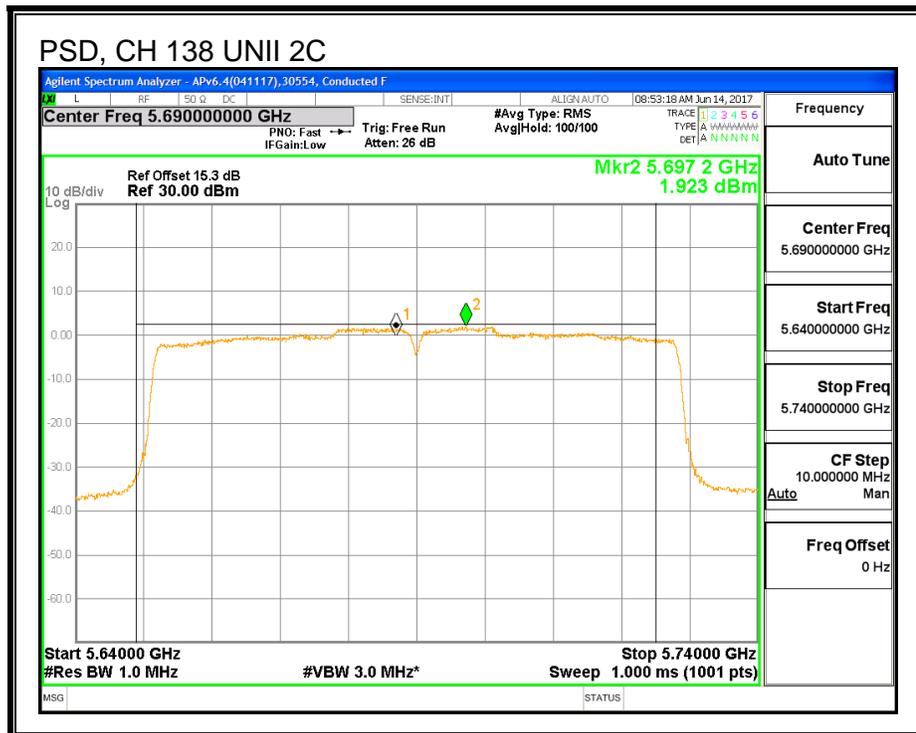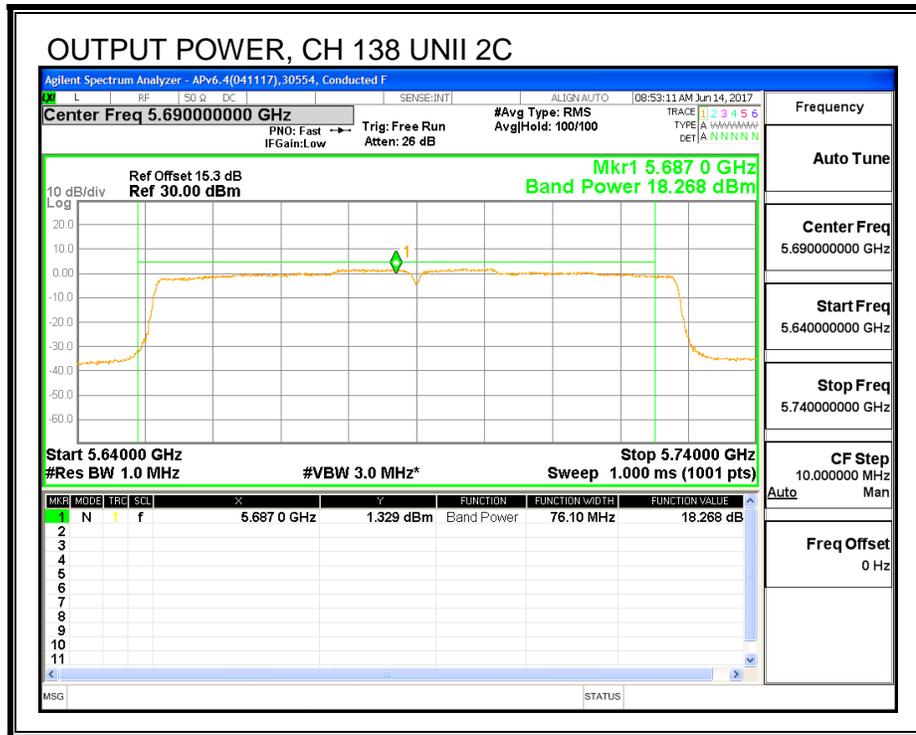

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	82.20	0.68	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	3.53	3.73	30.00	-26.27

**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-3.79	-3.59	30.00	-33.59

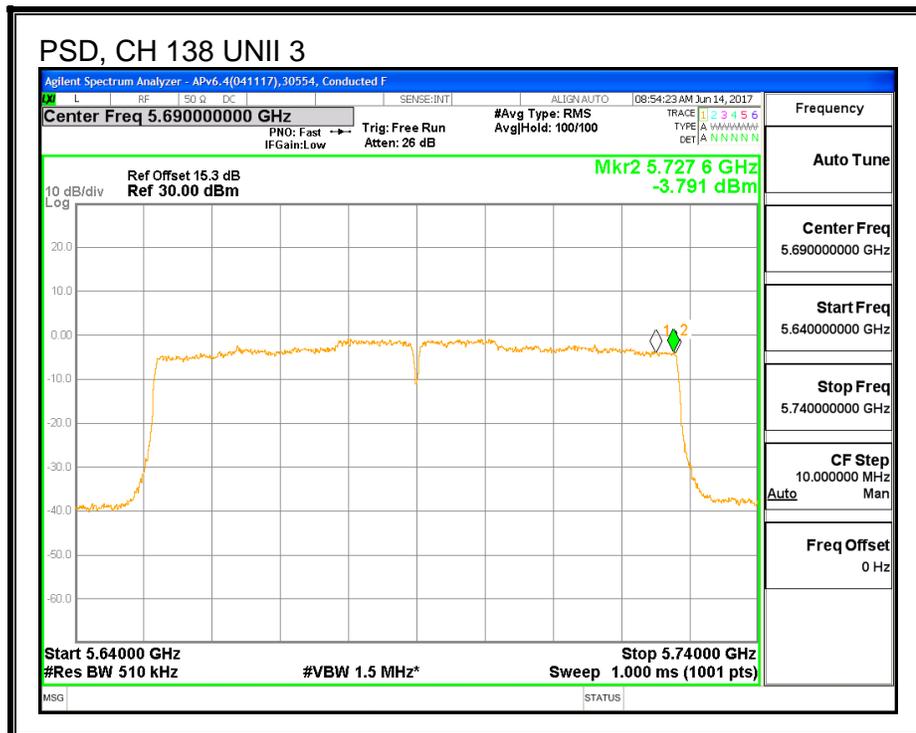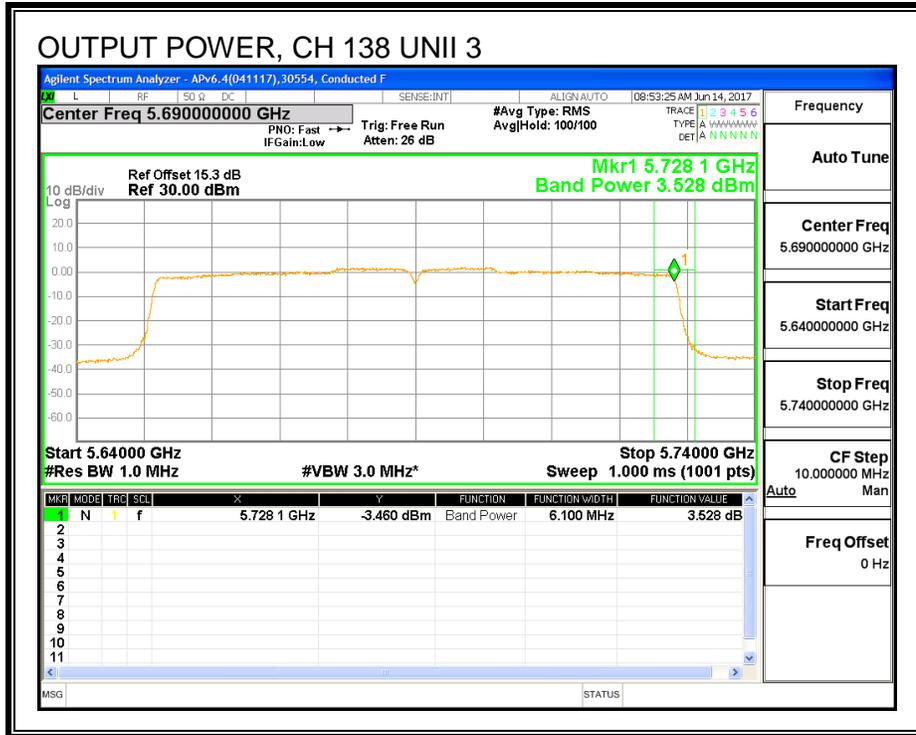

**8.31.6. 6 dB BANDWIDTH**

**LIMITS**


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

**RESULTS**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
High	5690	2.80

**6 dB BANDWIDTH**

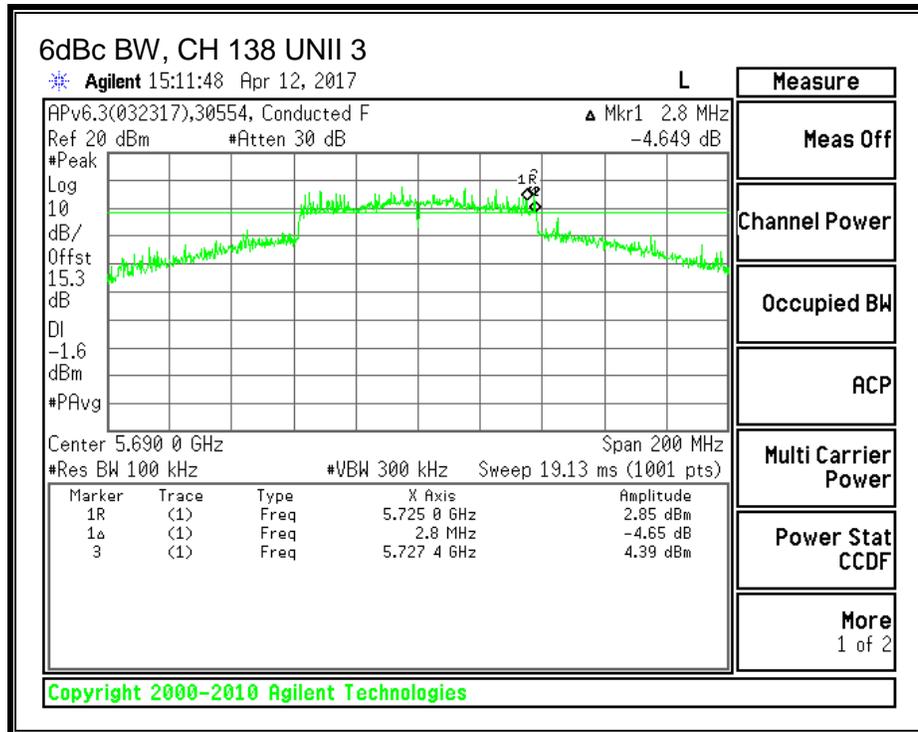

**8.32. 11ac HT80 LAT 3 SISO MODE IN THE 5.6GHz BAND**



**8.32.1. 26 dB BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5530	82.2
High	5610	82.4
138	5690	82.2

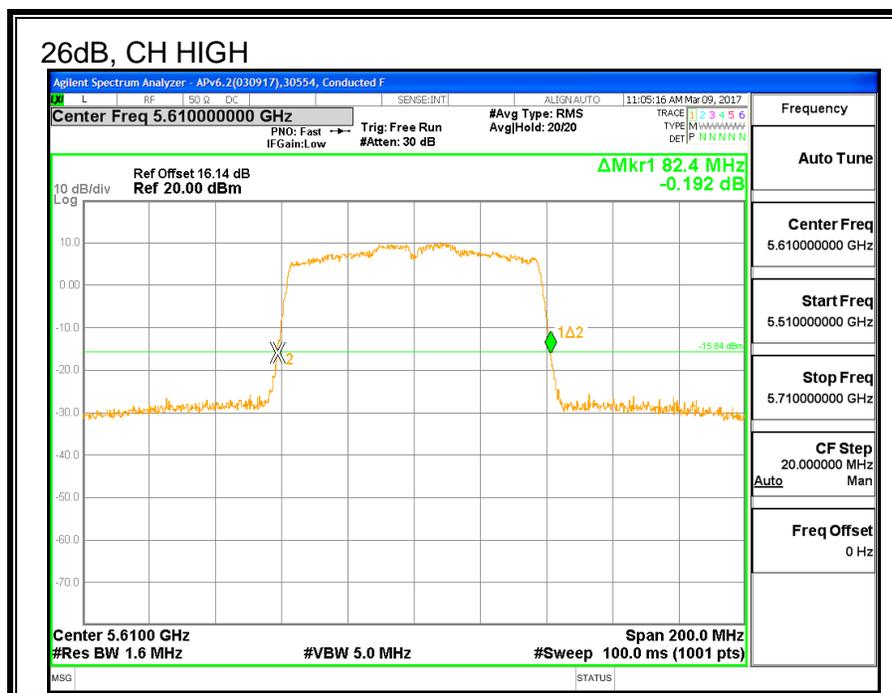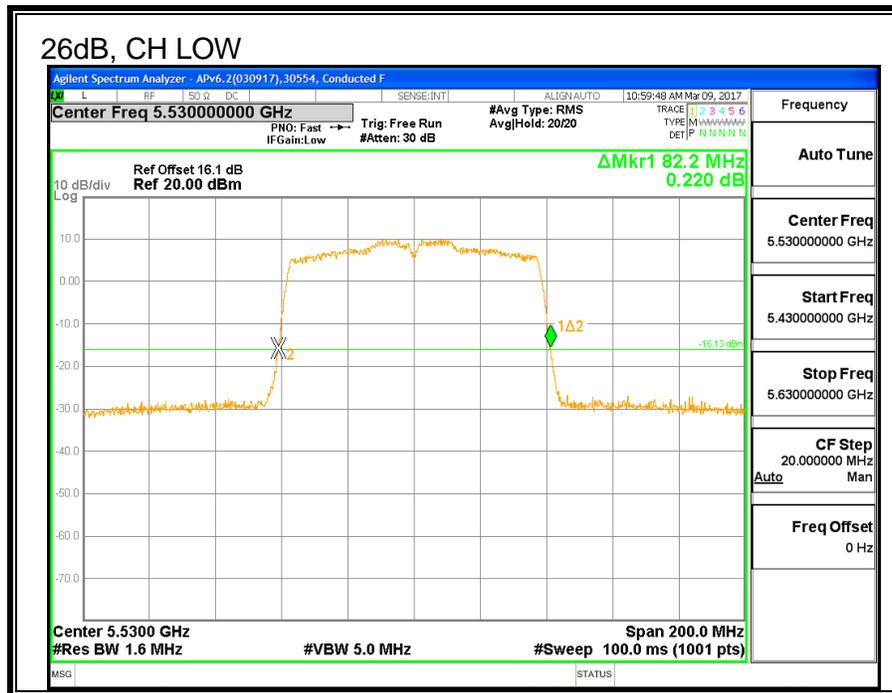

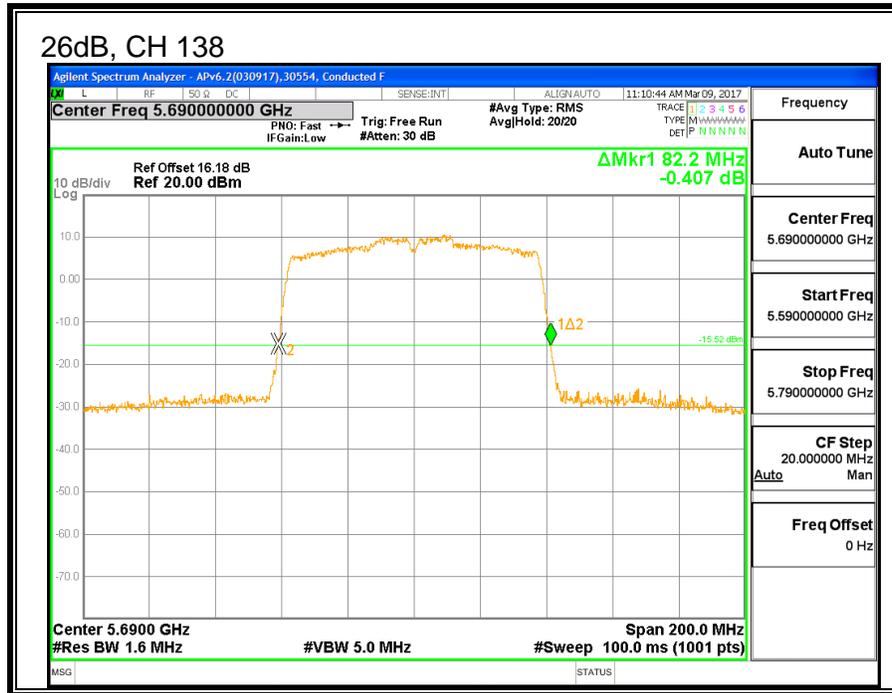



**8.32.2. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>99% BW LAT 3 (MHz)</b>
Low	5530	75.697
High	5610	75.855
138	5690	75.459

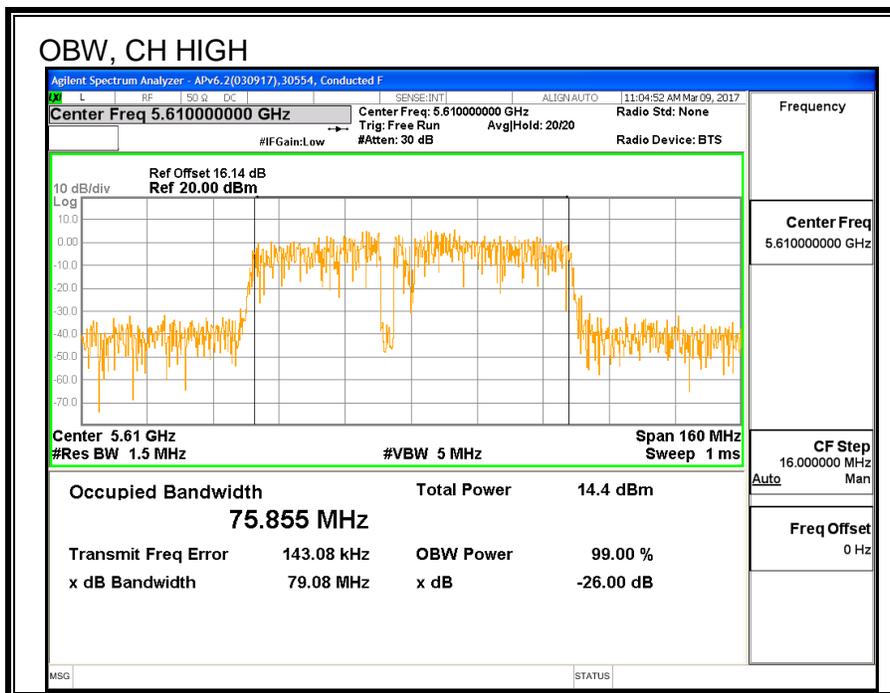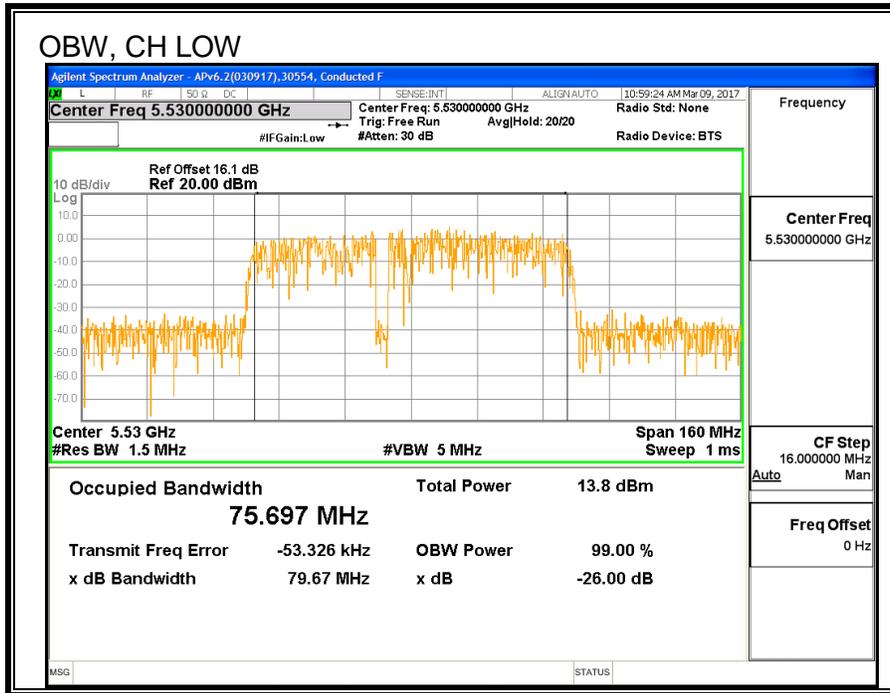

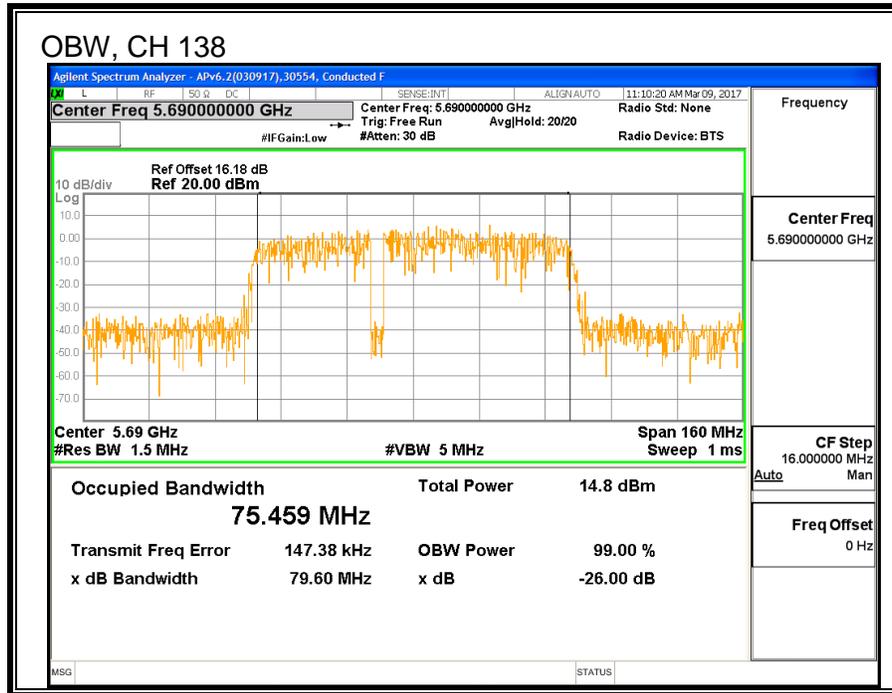

**8.32.3. AVERAGE POWER**

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

**LIMITS**

None; for reporting purposes only.

**TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>Power LAT 3 (dBm)</b>
Low	5530	14.90
High	5610	18.95
138	5690	18.78

---

### 8.32.4. OUTPUT POWER AND PSD

#### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

PSD Test Procedure: KDB 789033 D02 v01r04 Section F (Method SA-2)

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.20	75.70	-0.96	24.00	11.00
Mid	5610	82.40	75.86	-0.96	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	14.90	14.90	24.00	-9.10
Mid	5610	18.95	18.95	24.00	-5.05

**PSD Results**

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm/MHz)	Total Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)	PSD Margin (dB)
Low	5530	-0.61	-0.41	11.00	-11.41
Mid	5610	4.10	4.30	11.00	-6.70

**PSD**

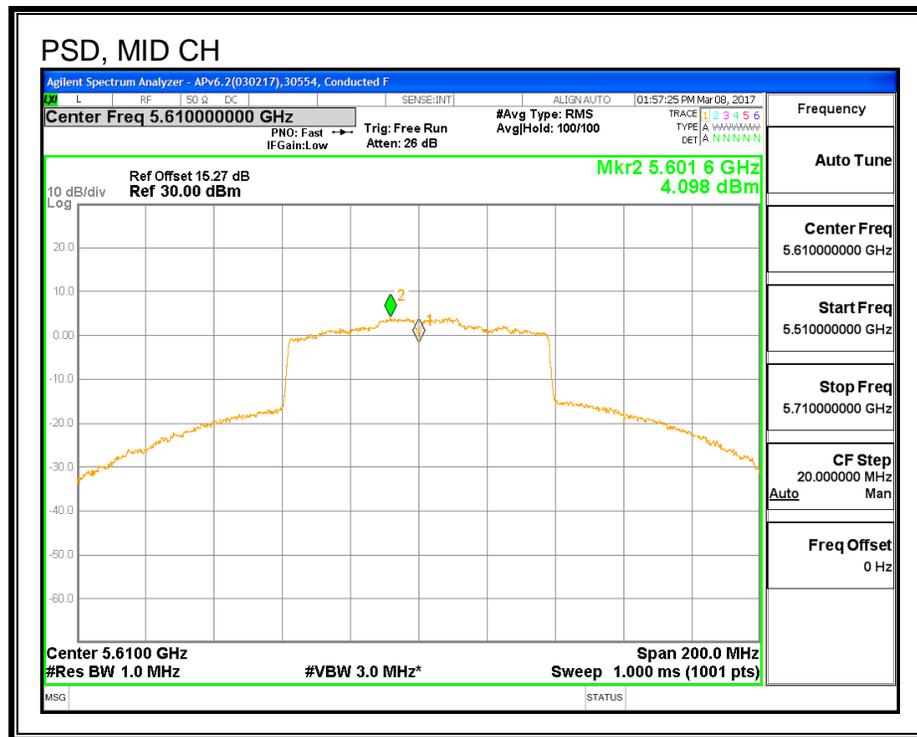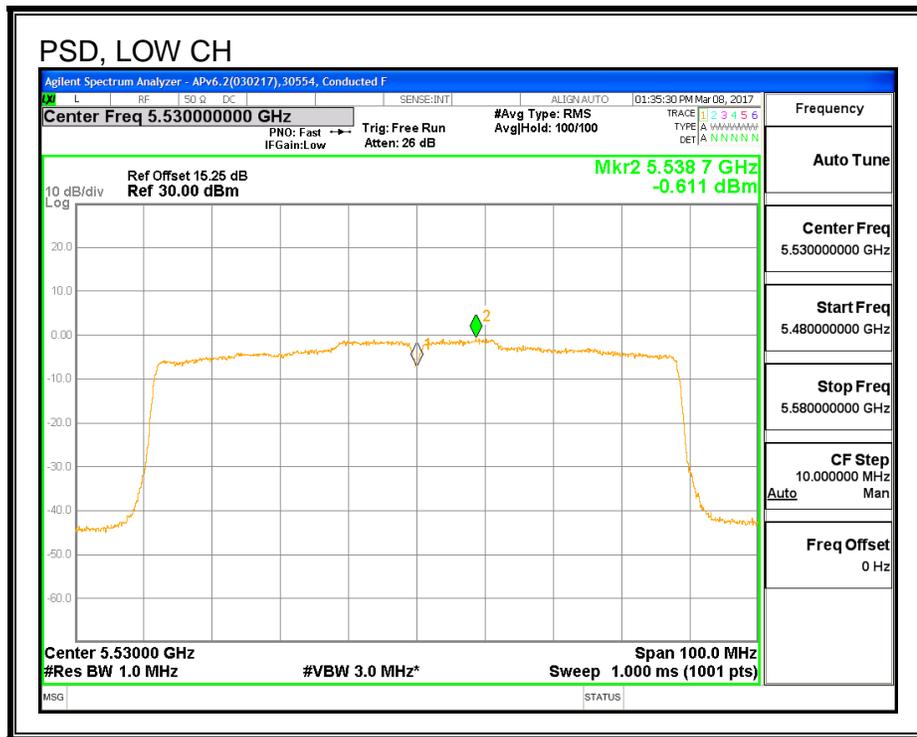

**8.32.5. STRADDLE CHANNEL 138 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	82.2	-0.96	-0.96	24.00	11.00



<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	18.35	18.55	24.00	-5.45

**PSD Results**

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	1.96	2.16	11.00	-8.84

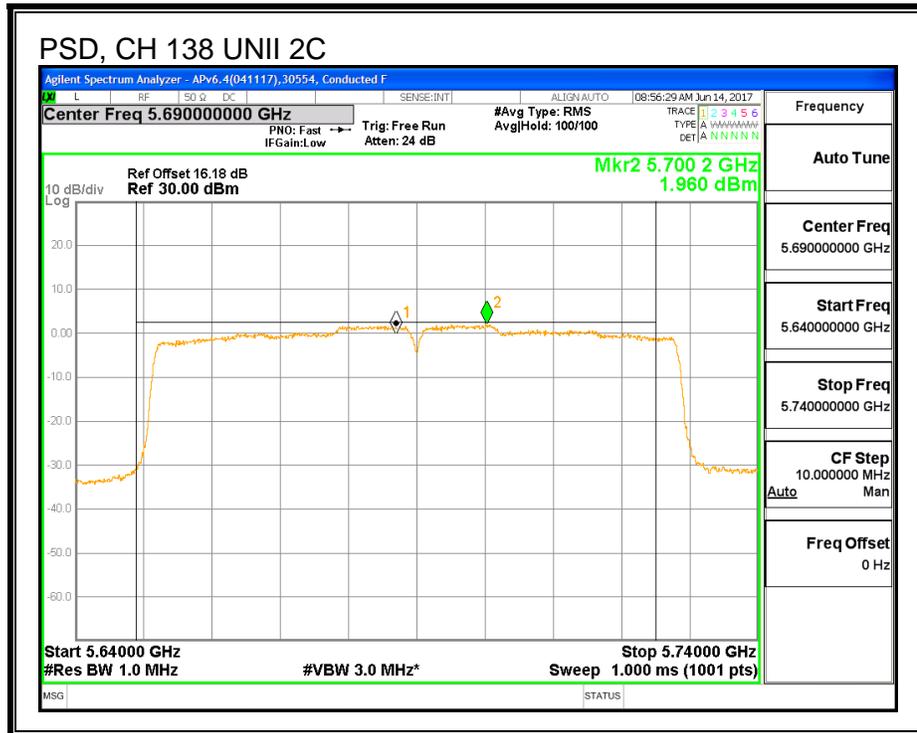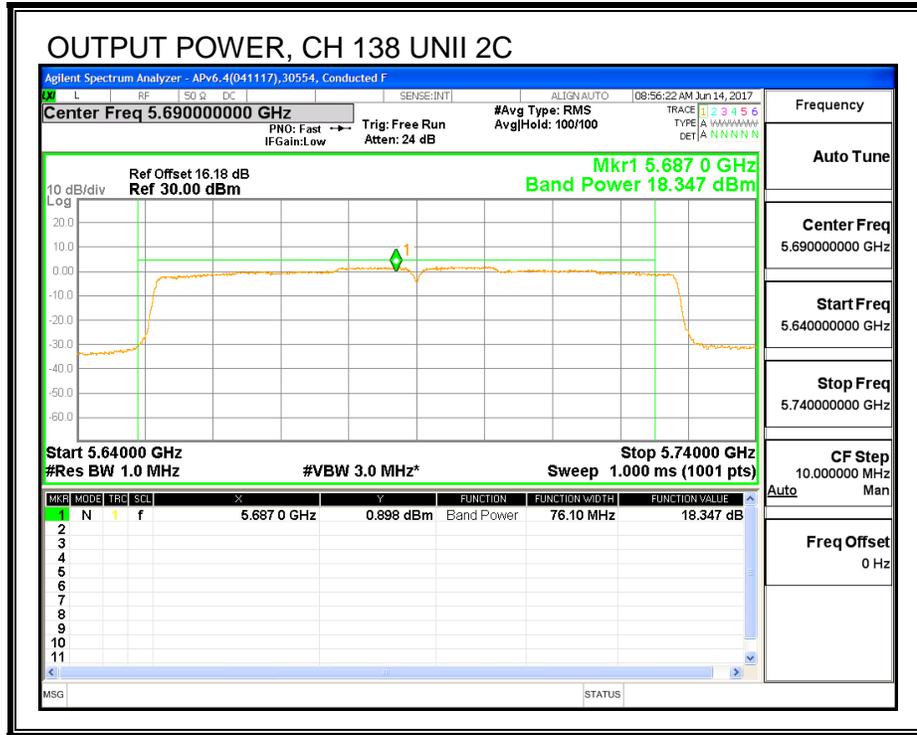

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	82.20	-0.93	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	3.51	3.71	30.00	-26.29

**PSD Results**

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-3.54	-3.34	30.00	-33.34

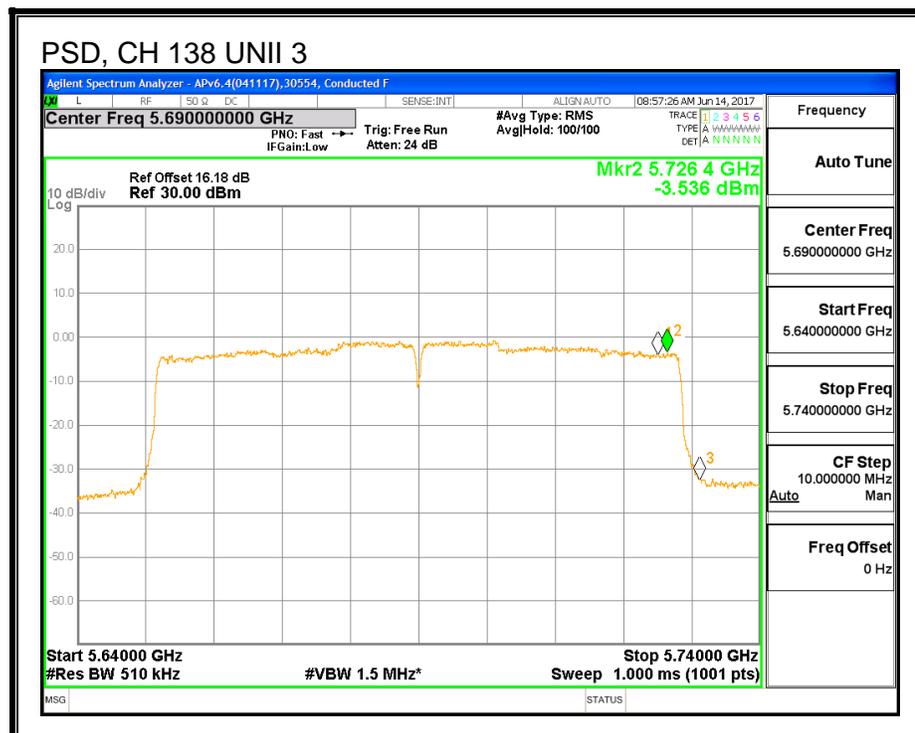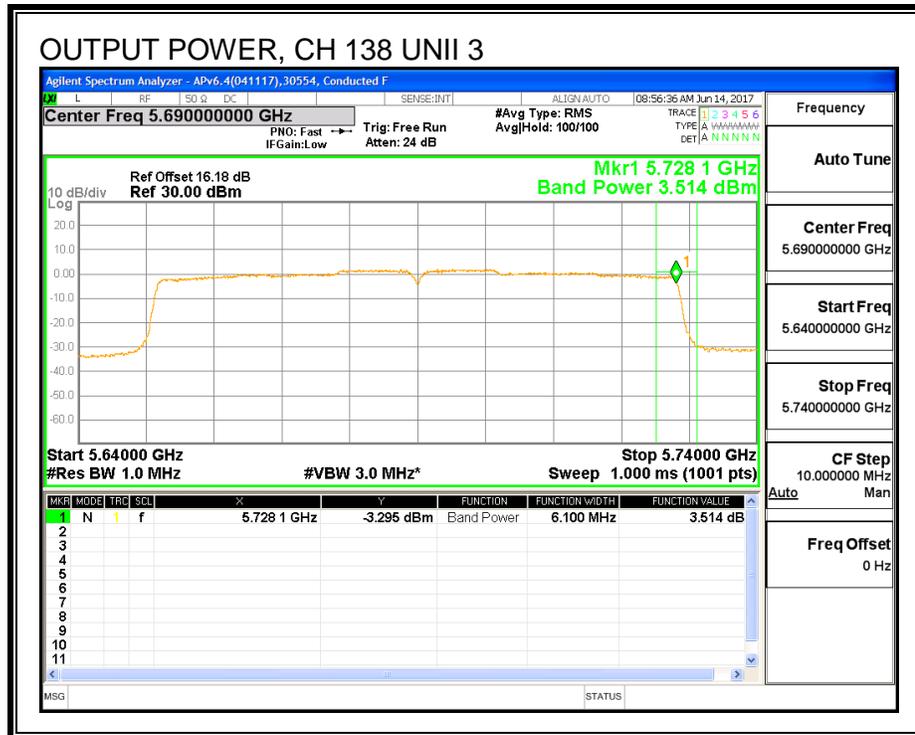

### 8.32.6. 6 dB BANDWIDTH

#### LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
High	5690	2.60

#### 6 dB BANDWIDTH

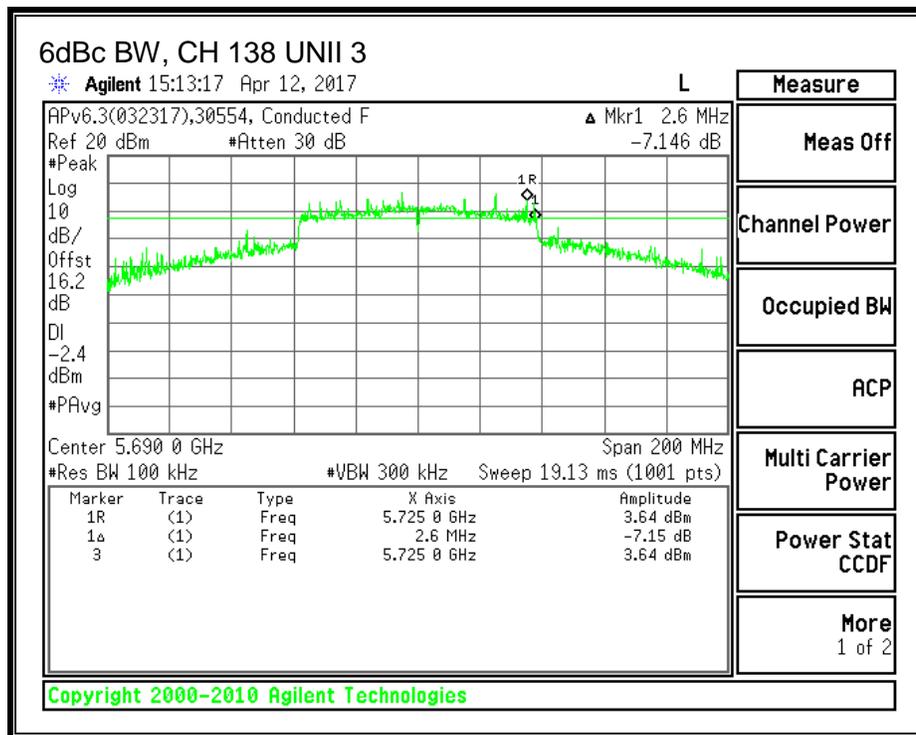

**8.33. 11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND**



**8.33.1. 26 dB BANDWIDTH**



**LIMITS**



None; for reporting purposes only.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>26 dB BW UAT 2 (MHz)</b>	<b>26 dB BW LAT 3 (MHz)</b>
Low	5530	82.2	82.0
High	5610	82.4	82.2
138	5690	82.2	81.8

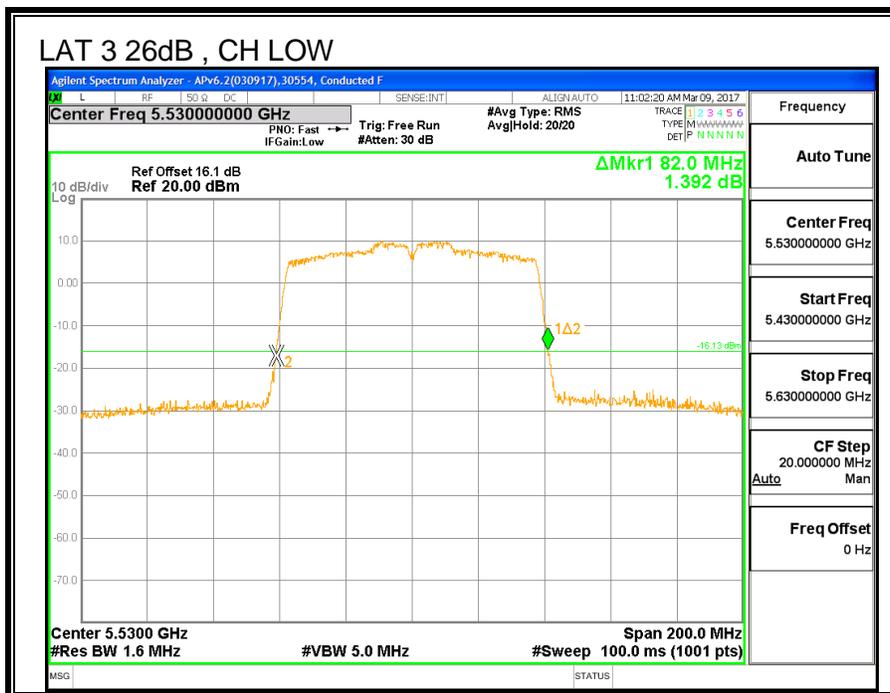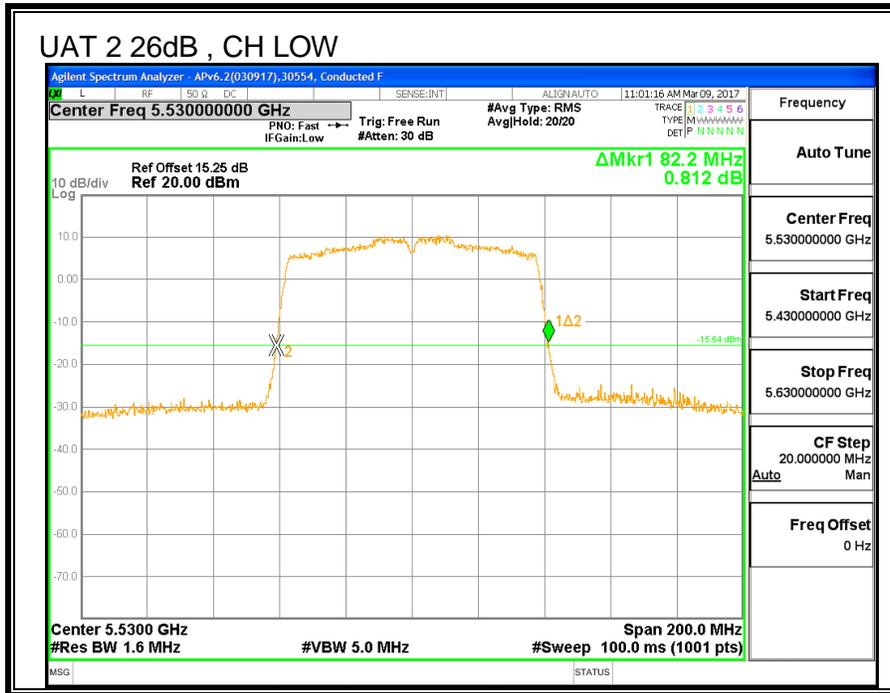

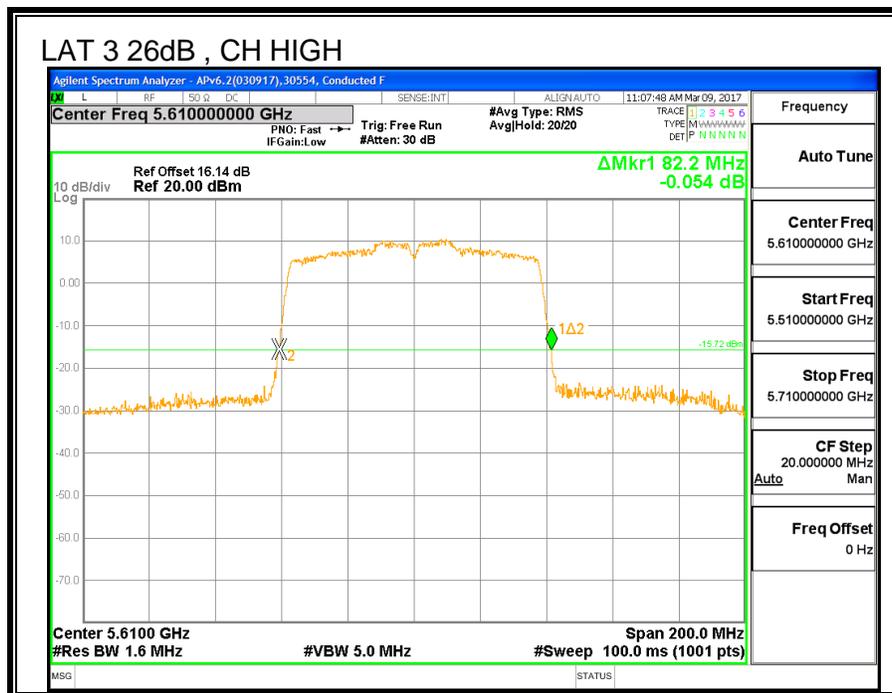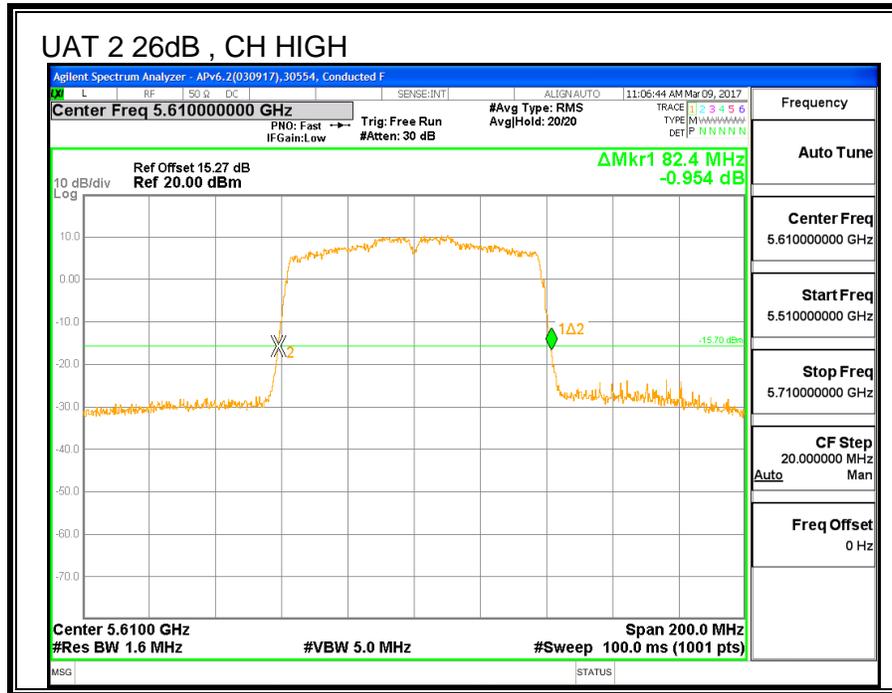

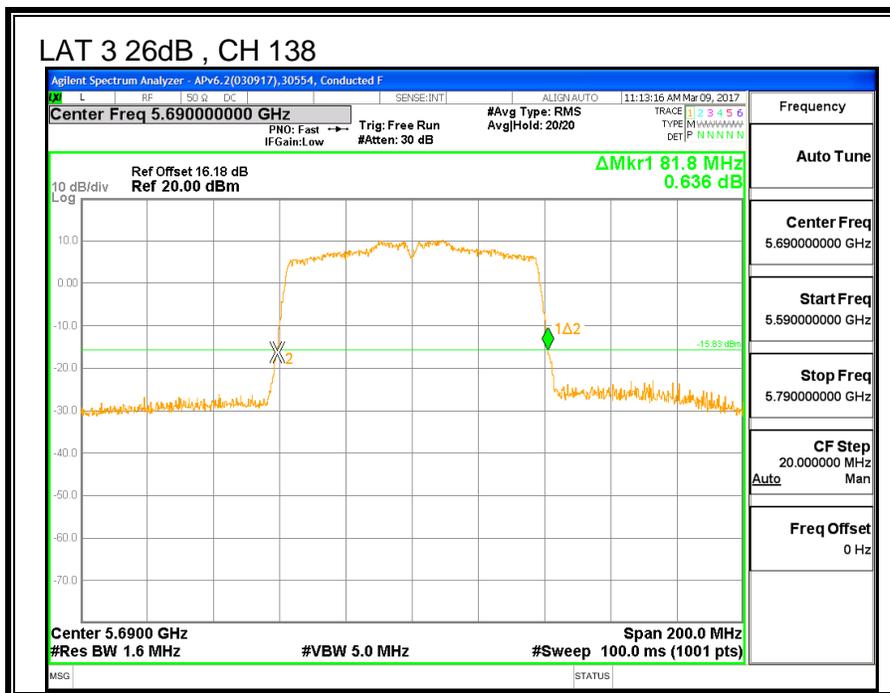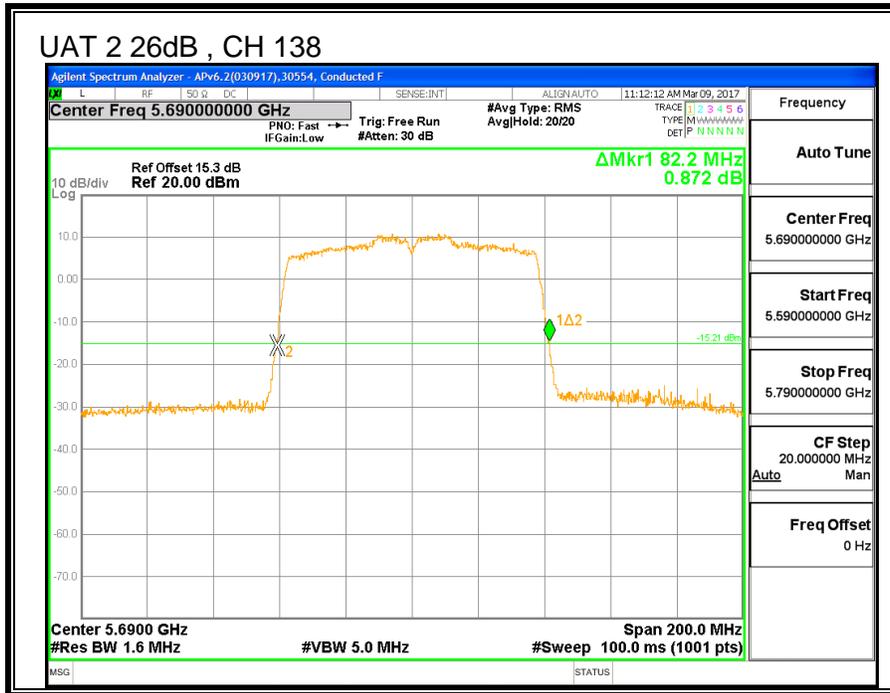



**8.33.2. 99% BANDWIDTH**



**LIMITS**



None; for reporting purposes only.

**RESULTS**

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5530	72.521	76.027
High	5610	75.609	75.703
138	5690	75.517	75.458

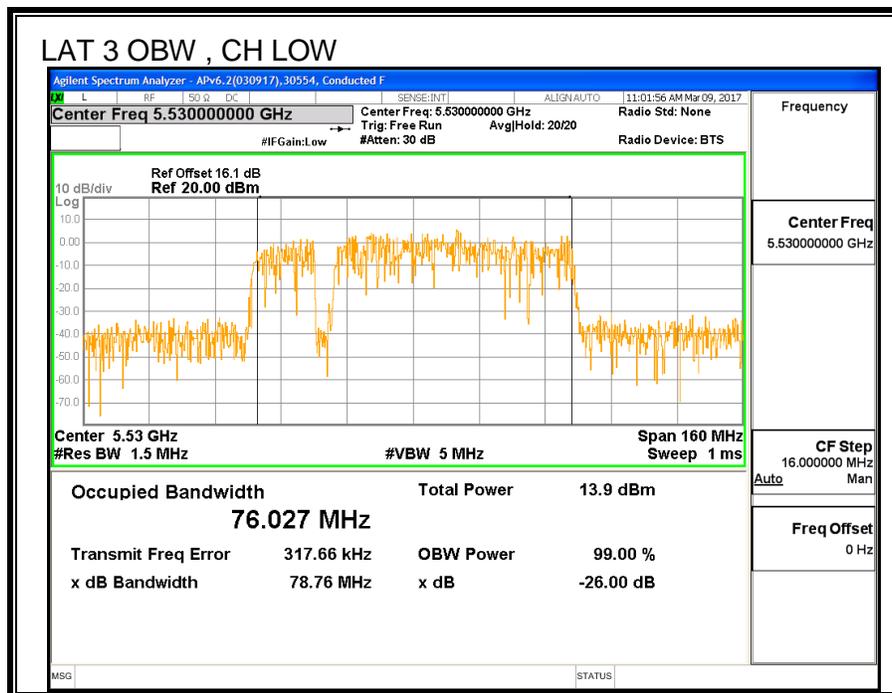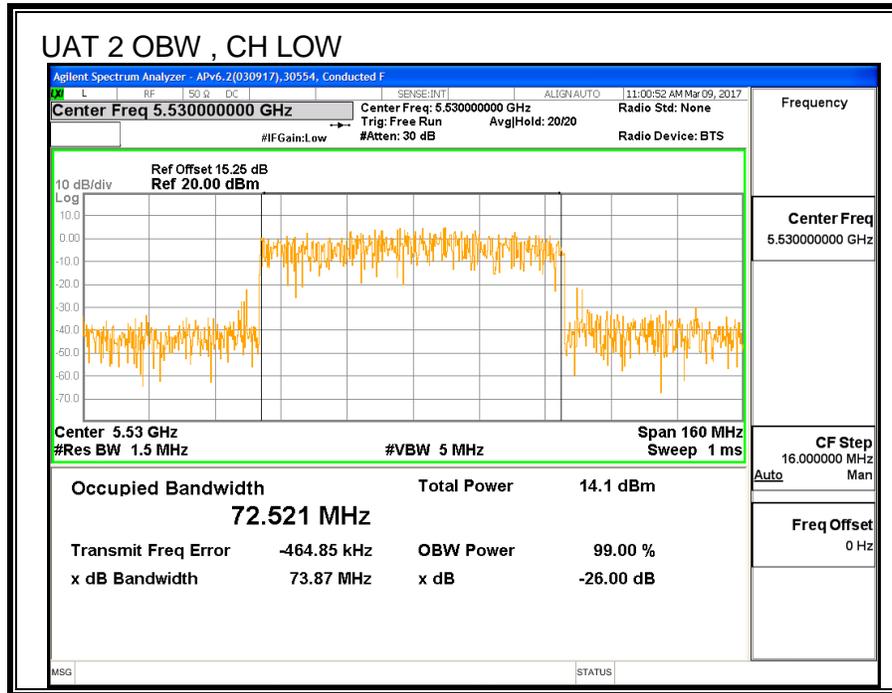

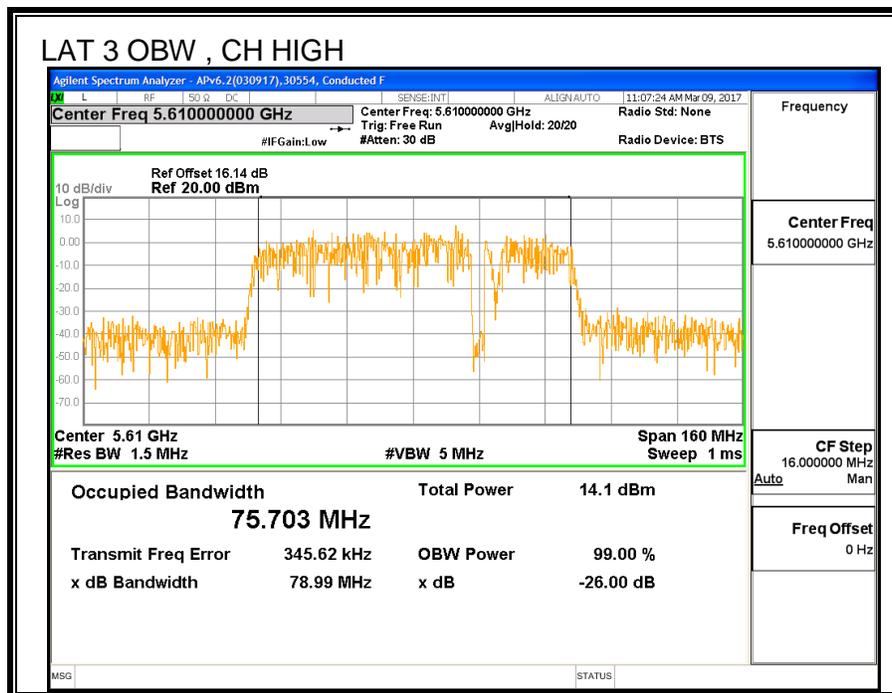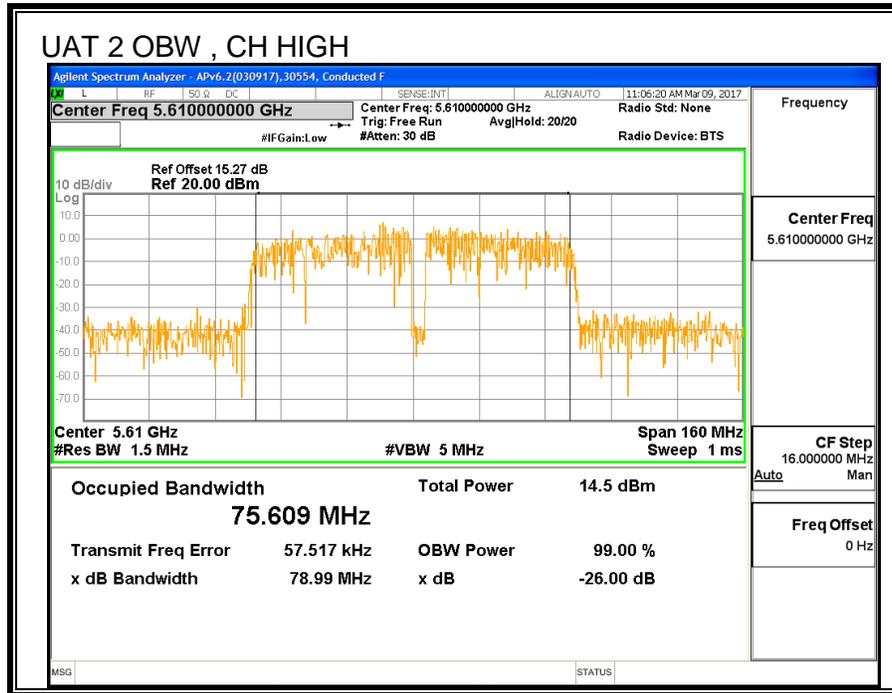

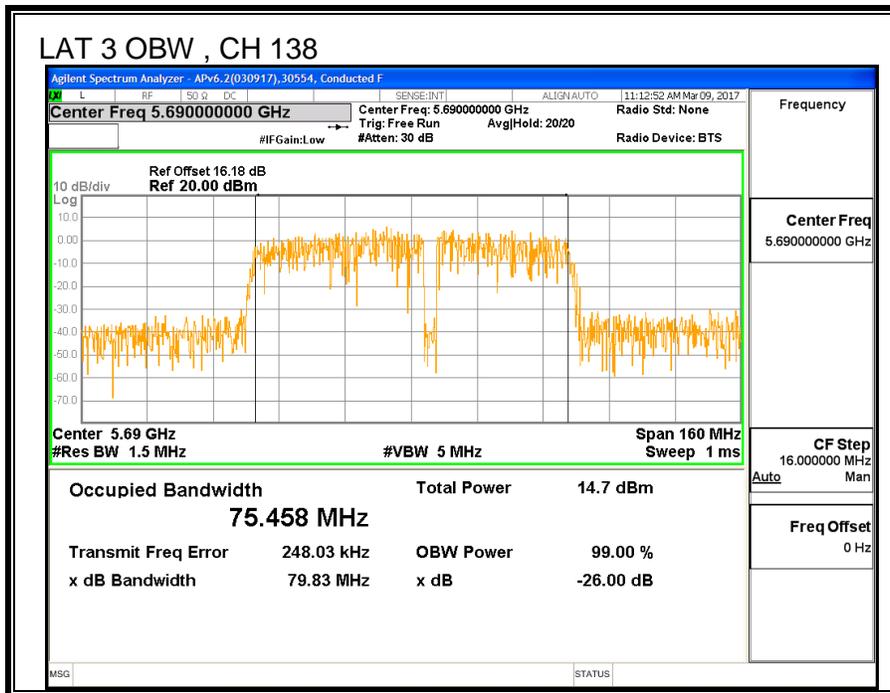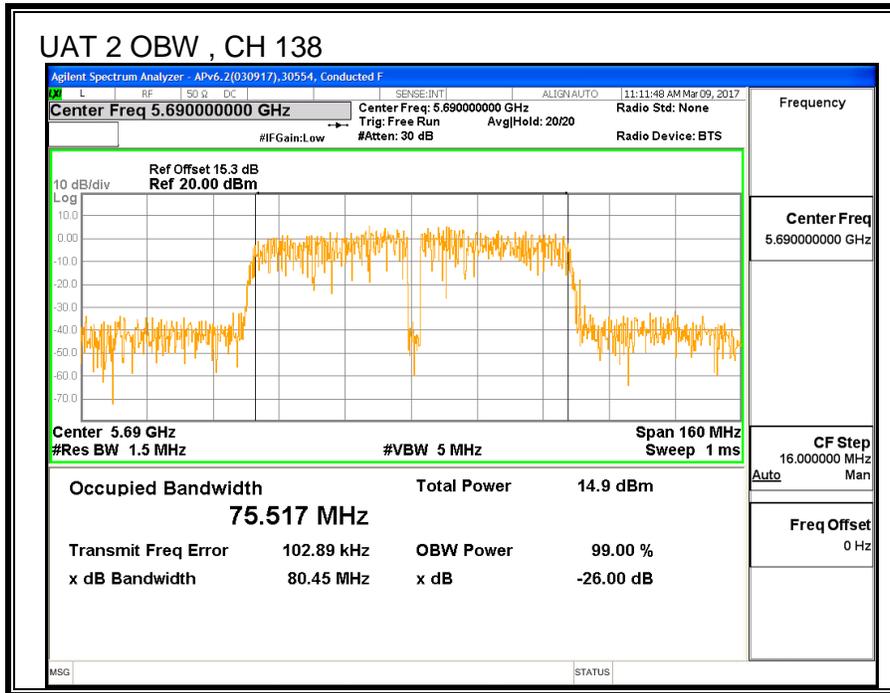

**8.33.3. AVERAGE POWER**

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

**LIMITS**

None; for reporting purposes only.

**TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

**RESULTS**

Channel	Frequency	Power UAT 2 (dBm)	Power LAT 3 (dBm)	Total Power (dBm)
Low	5530	13.98	13.78	16.89
High	5610	18.78	18.91	21.86
138	5690	18.77	18.92	21.86

---

### 8.33.4. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

PSD Test Procedure: KDB 789033 D02 v01r04 Section F (Method SA-2)

**DIRECTIONAL ANTENNA GAIN**

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>UAT 2 Antenna Gain (dBi)</b>	<b>LAT 3 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-0.75	-0.96	-0.85

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>UAT 2 Antenna Gain (dBi)</b>	<b>LAT 3 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
-0.75	-0.96	2.16

**RESULTS**

<b>ID:</b>	39316	<b>Date:</b>	12/15/16
------------	-------	--------------	----------

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.00	72.521	-0.85	2.16	24.00	11.00
High	5610	82.20	75.609	-0.85	2.16	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	13.98	13.78	16.89	24.00	-7.11
High	5610	18.78	18.91	21.86	24.00	-2.14



**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/MHz)	LAT 3 Meas PSD (dBm/MHz)	Total Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)	PSD Margin (dB)
Low	5530	-0.90	0.03	2.80	11.00	-8.20
High	5610	3.82	3.46	6.85	11.00	-4.15

**PSD, UAT 2**

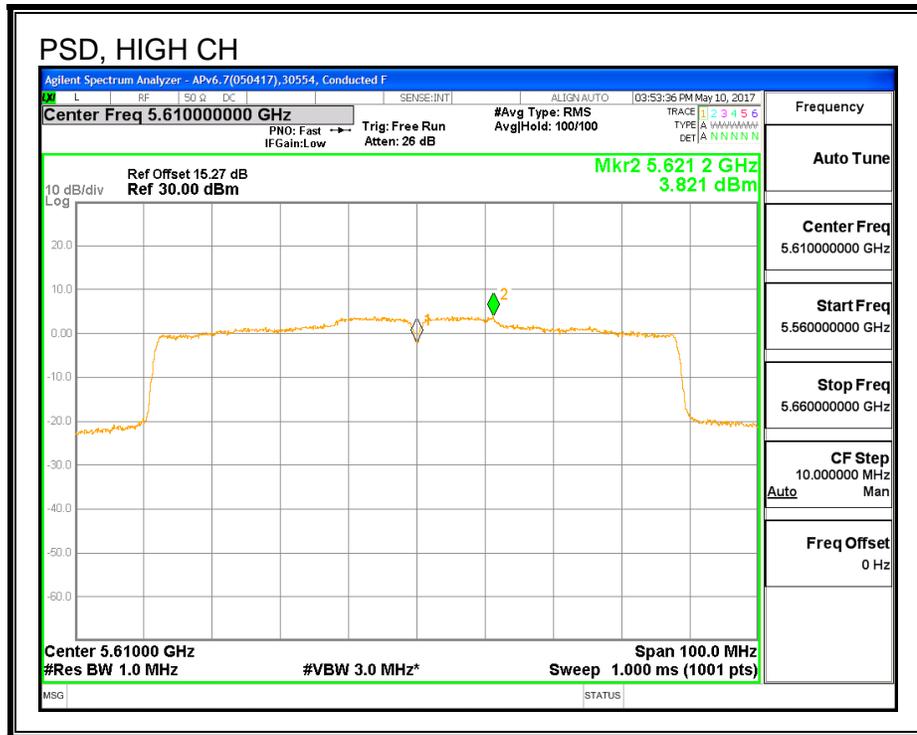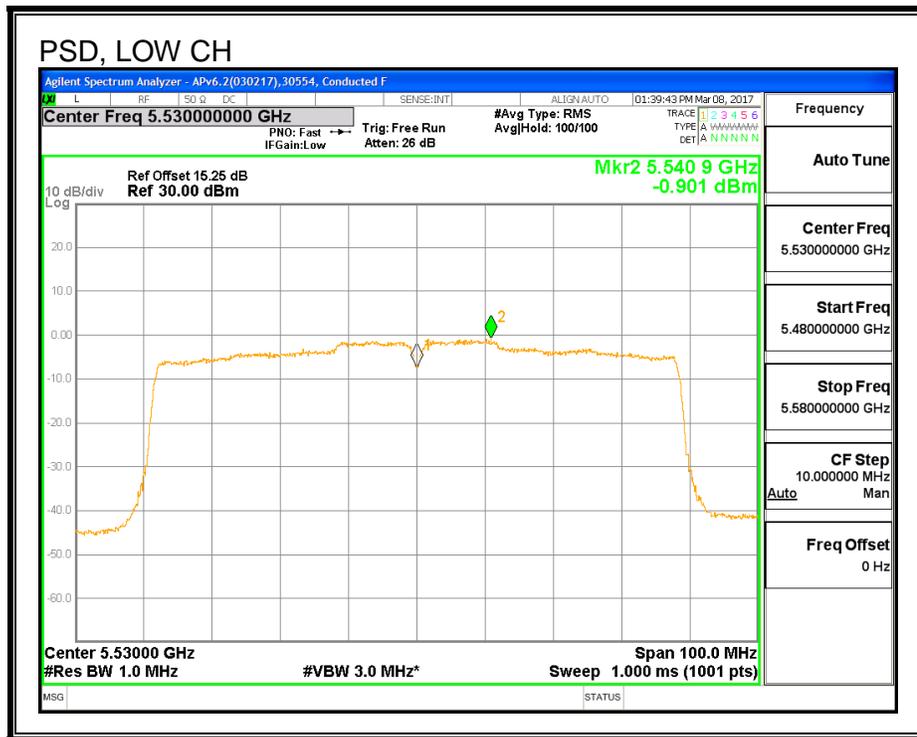

**PSD, LAT 3**

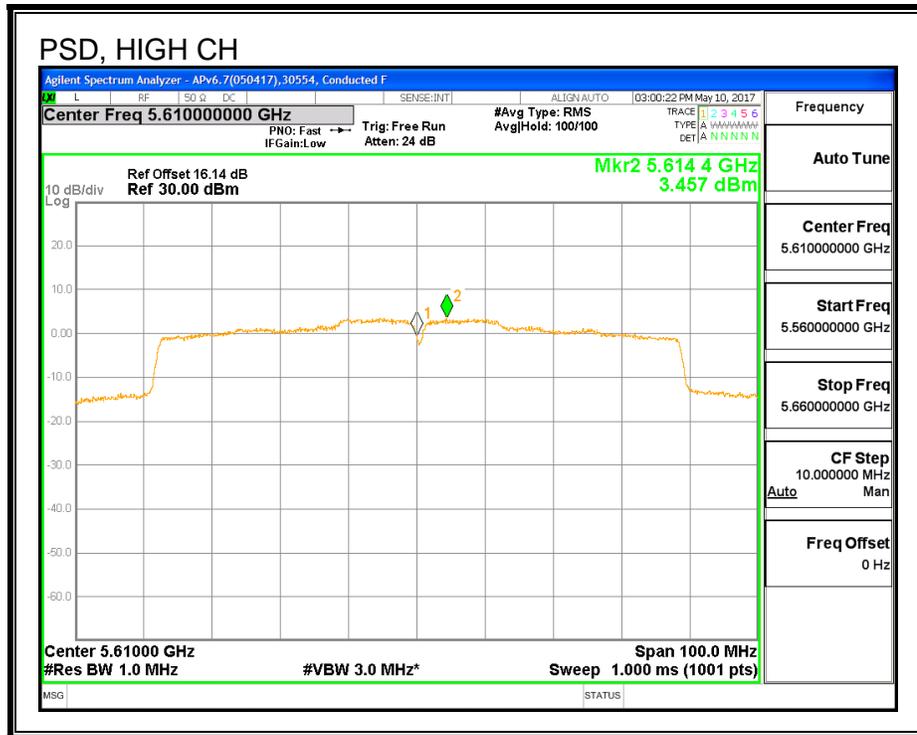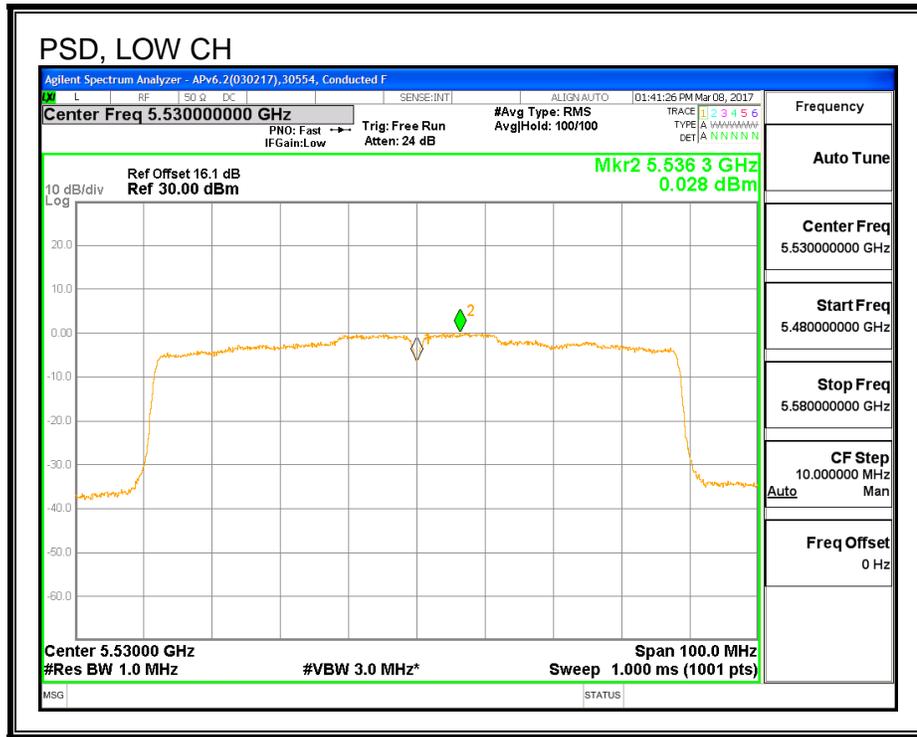

### 8.33.5. STRADDLE CHANNEL 138 RESULTS

#### UNII-2C BAND

##### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	82.20	-0.85	2.16	24.00	11.00

Duty Cycle CF (dB)	0.20	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


##### Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	18.31	18.32	21.52	24.00	-2.48


##### PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	1.86	1.91	5.10	11.00	-5.90


**OUTPUT POWER, UAT 2**

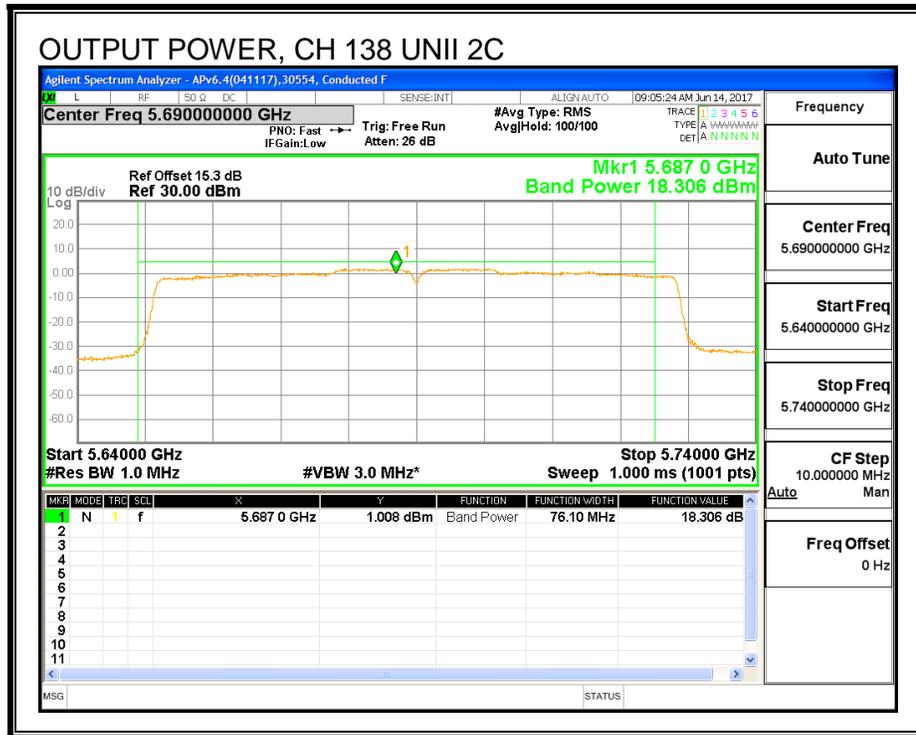


**OUTPUT POWER, LAT 3**

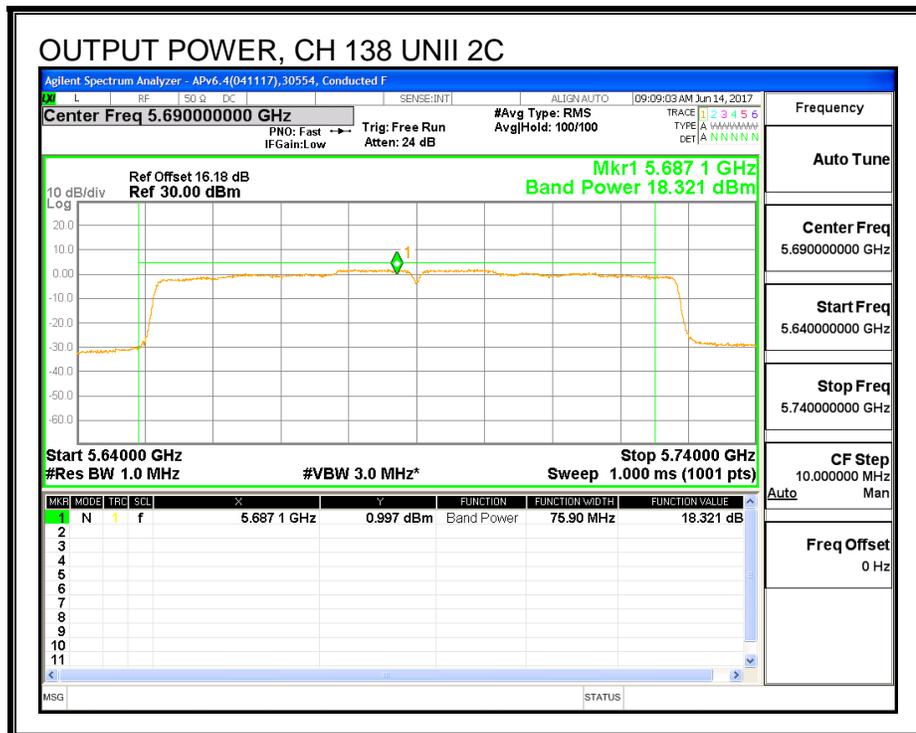

**PSD, UAT 2**

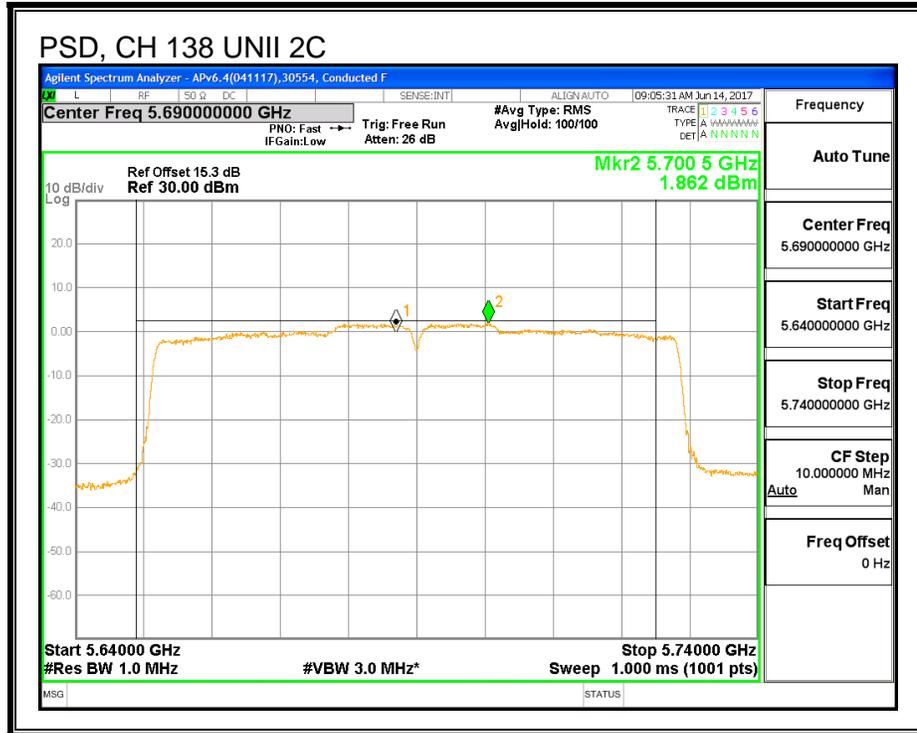

**PSD, LAT 3**

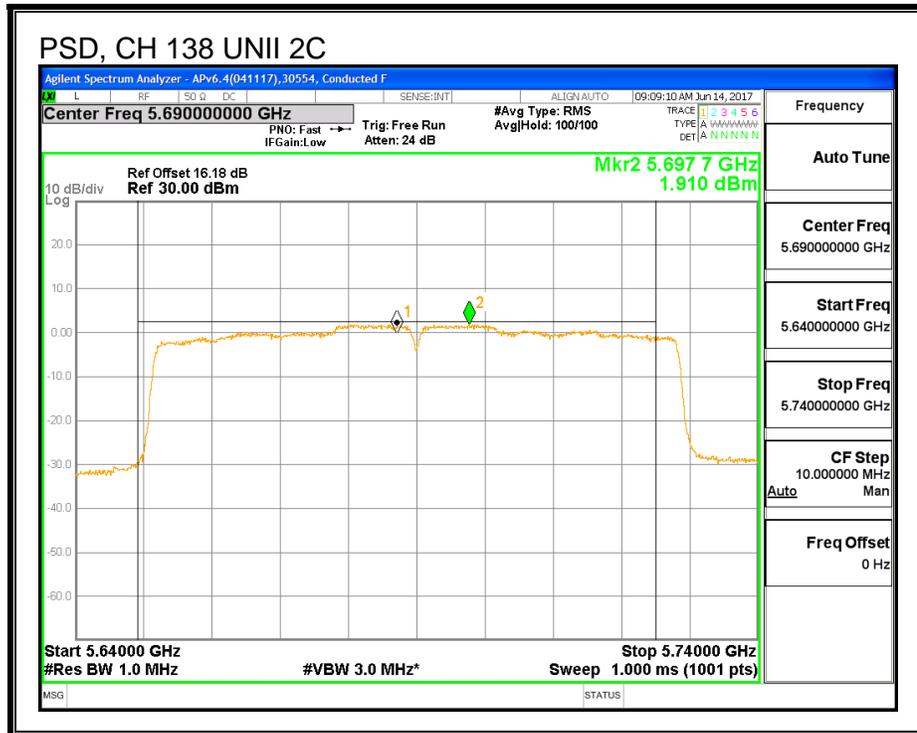

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	82.20	-0.05	2.92	30.00	30.00

<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	3.52	3.57	6.75	30.00	-23.25


**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-3.64	-3.65	-0.43	30.00	-30.43


**OUTPUT POWER, UAT 2**

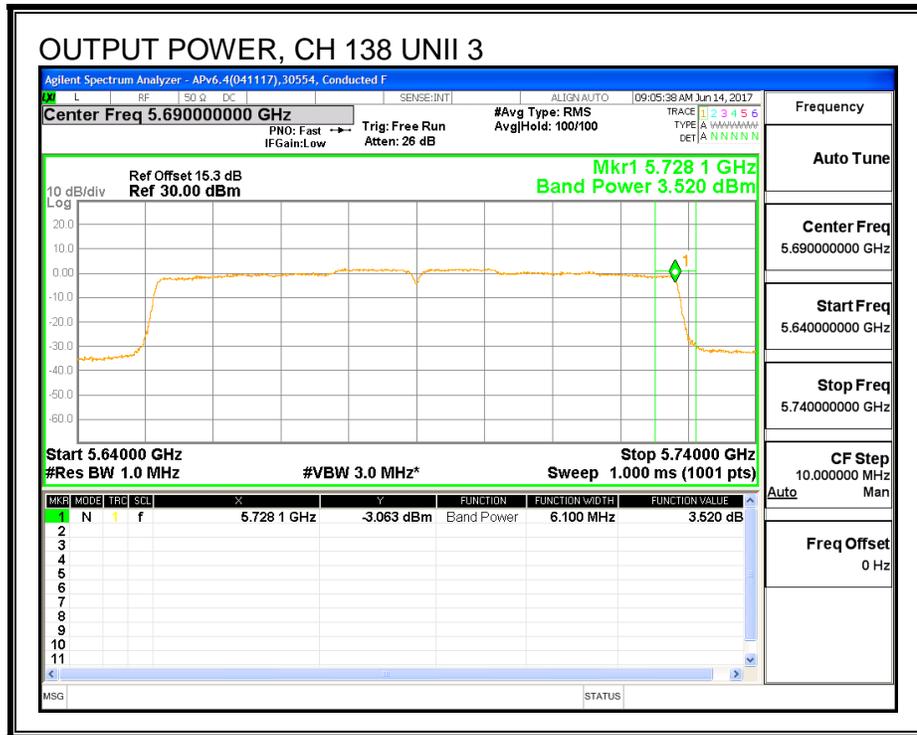


**OUTPUT POWER, LAT 3**

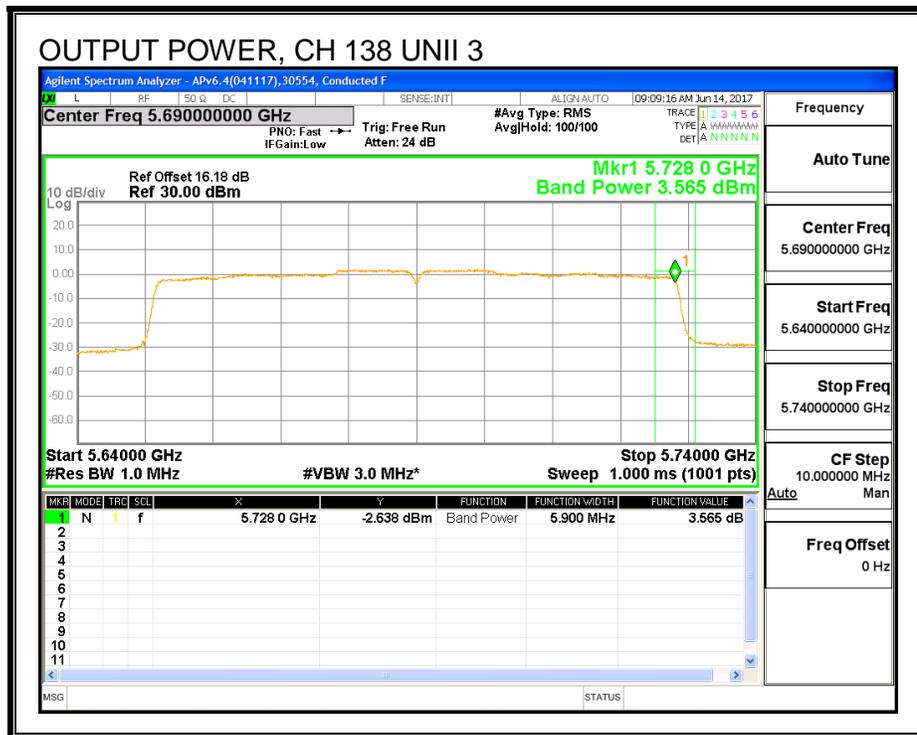

**PSD, UAT 2**

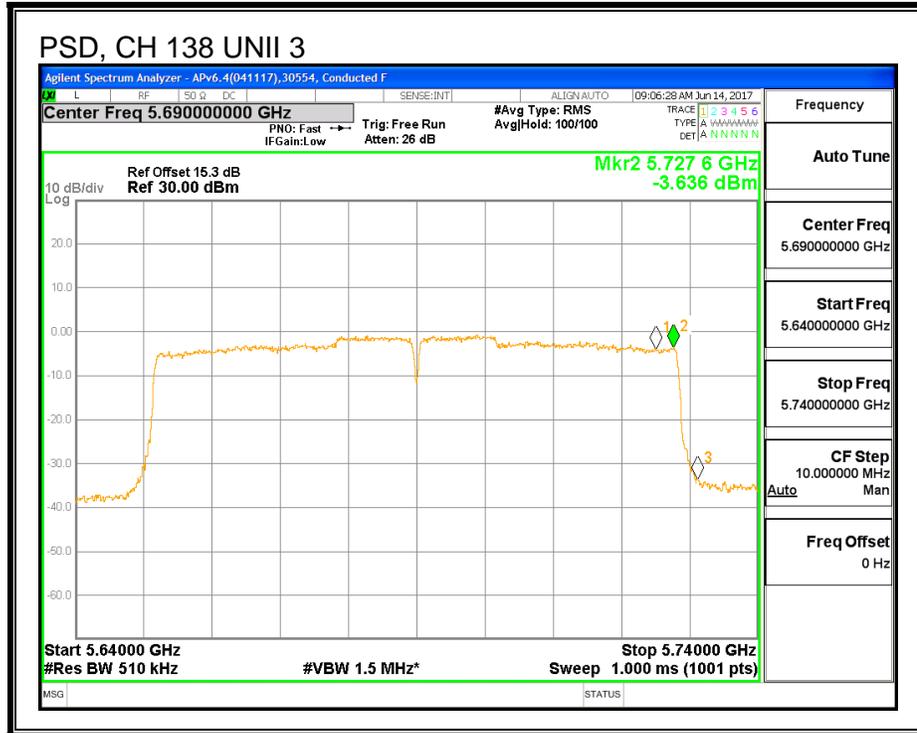

**PSD, LAT 3**

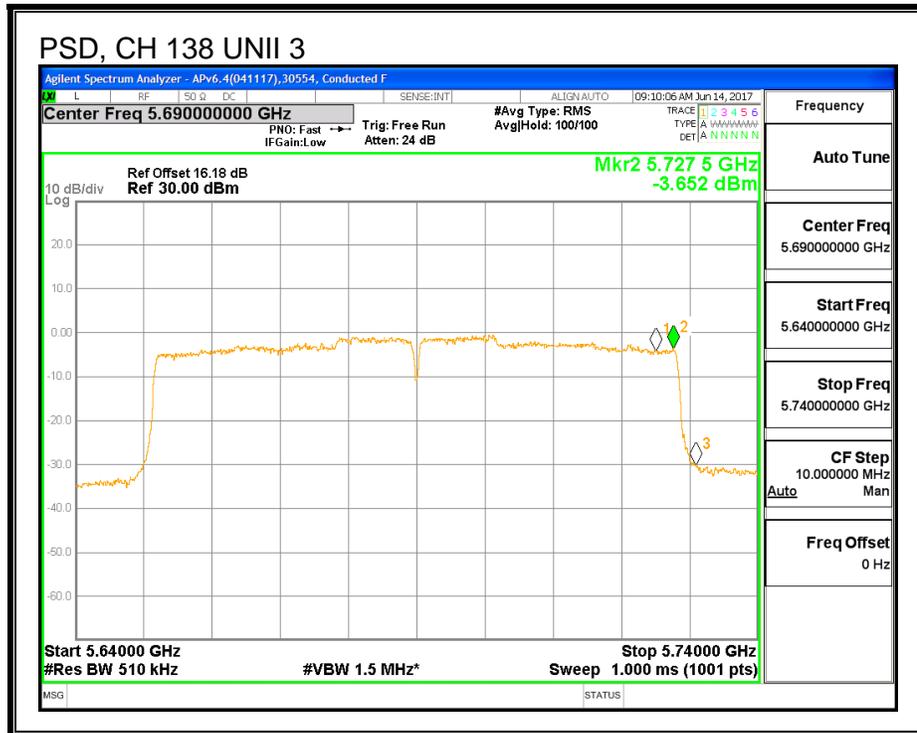

### 8.33.6. 6 dB BANDWIDTH

#### LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.


#### RESULTS

Channel	Frequency (MHz)	6 dB BW	6 dB BW
		UAT 2 (MHz)	LAT 3 (MHz)
High	5690	2.80	3.00

**UAT 2**

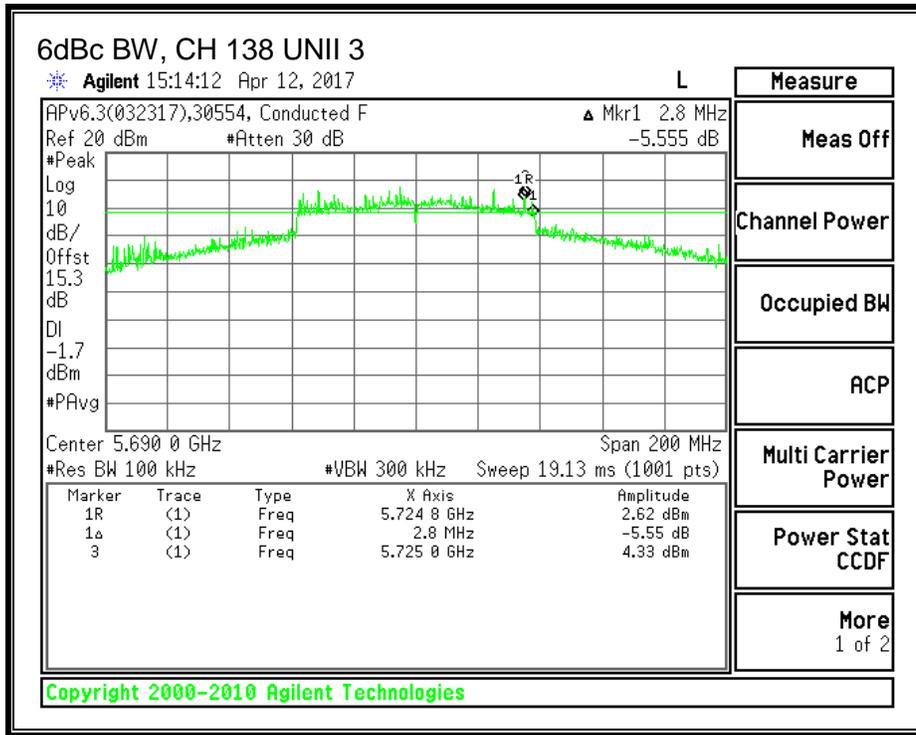

**LAT 3**

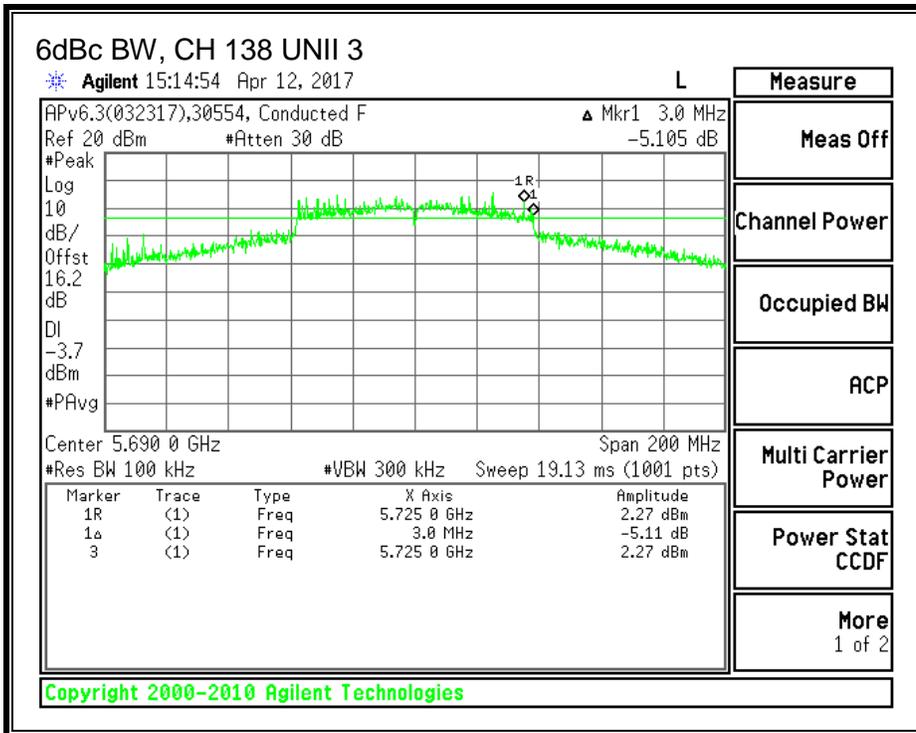

### 8.34. 11n HT20 UAT 2 SISO MODE IN THE 5.8GHz BAND

#### 8.34.1. 6 dB BANDWIDTH



##### LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### RESULTS

Channel	Frequency	6 dB BW UAT 2 (MHz)	Minimum Limit (MHz)
Low	5745	16.05	0.5
Mid	5785	15.15	0.5
High	5825	17.60	0.5

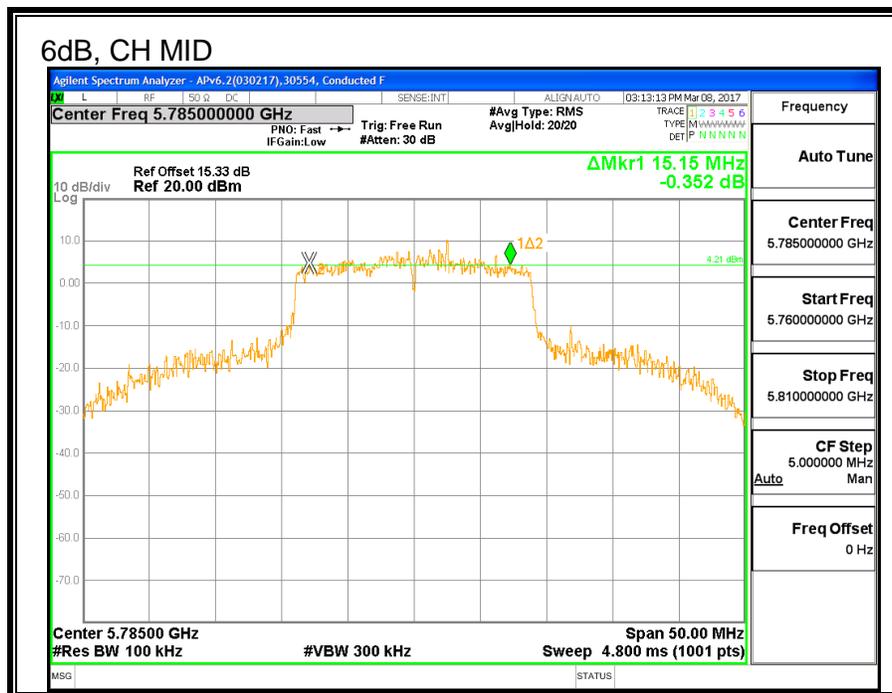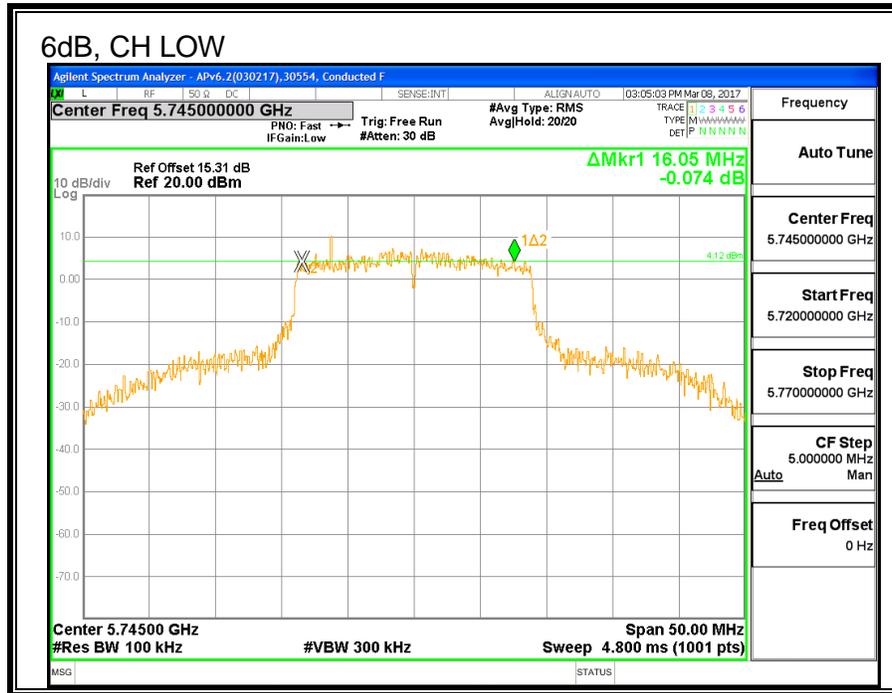

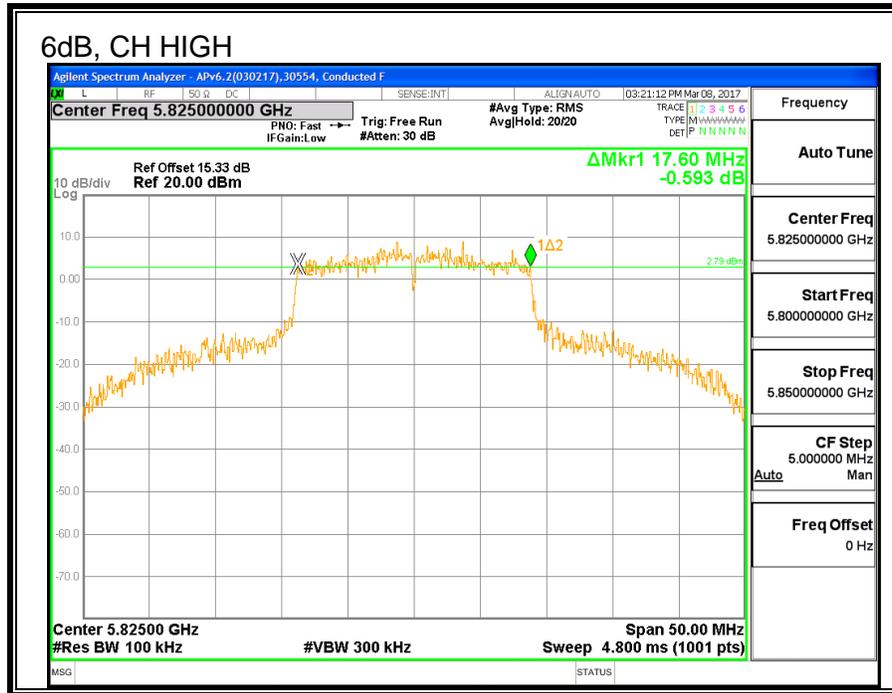



**8.34.2. 26 dB BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5745	22.00
Mid	5785	21.85
High	5825	22.05

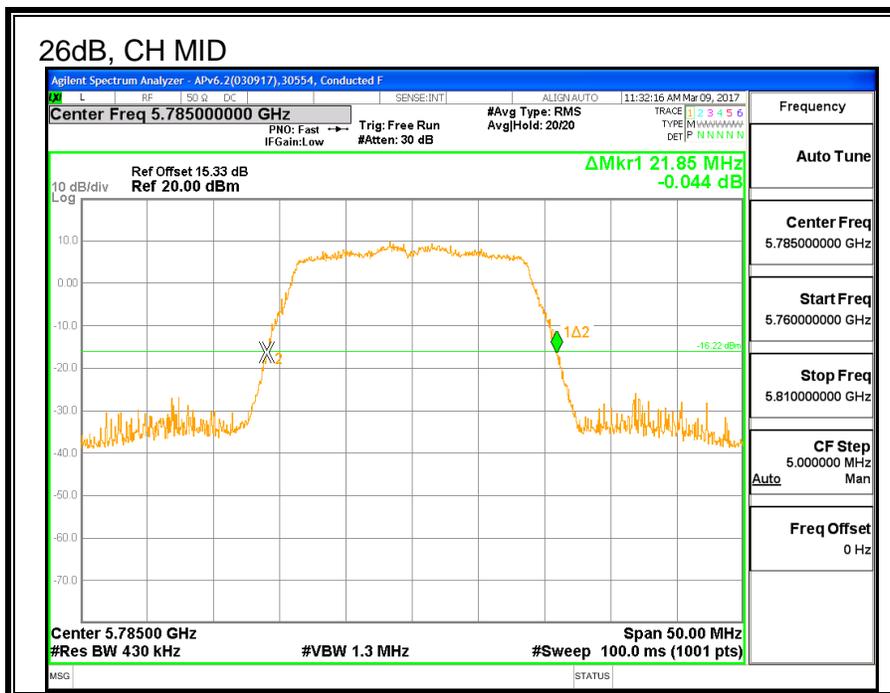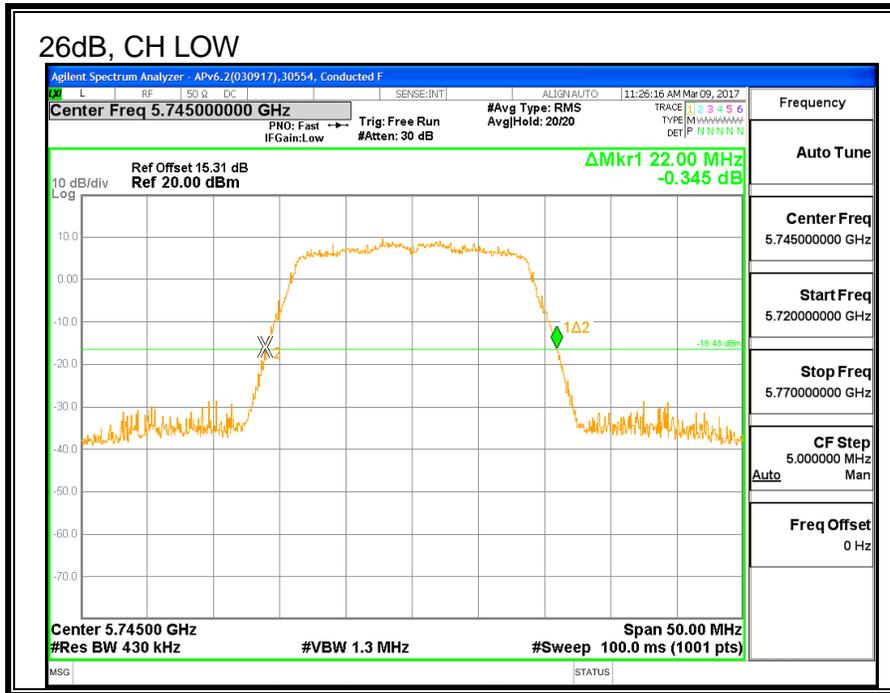

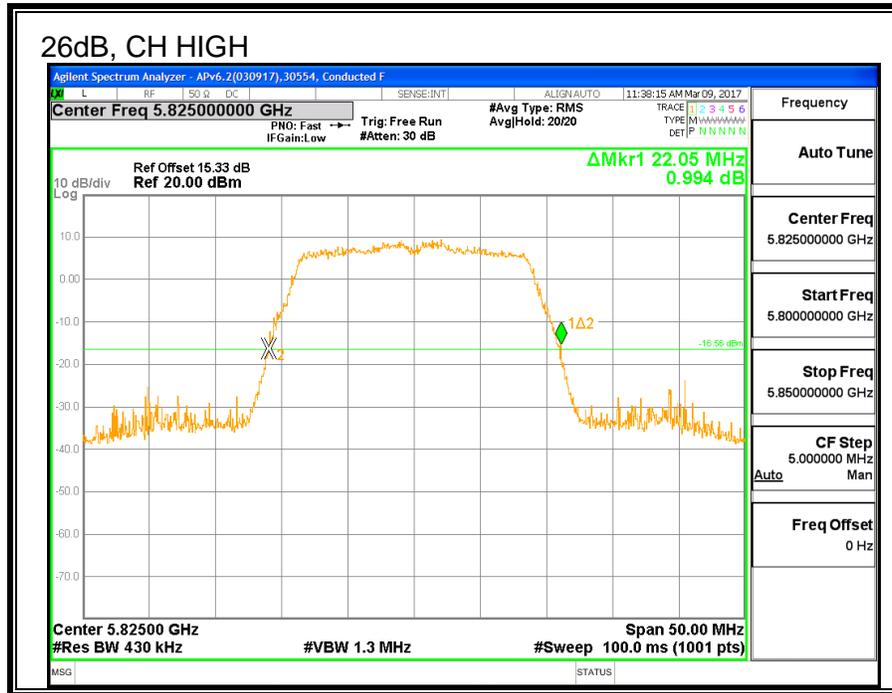



**8.34.3. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>99% BW UAT 2 (MHz)</b>
Low	5745	17.618
Mid	5785	17.779
High	5825	17.699

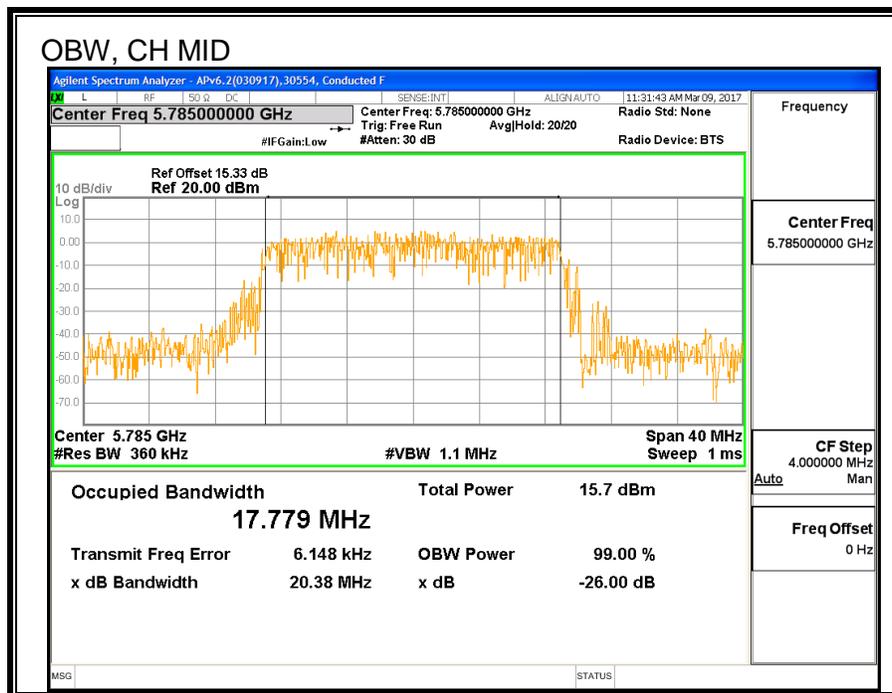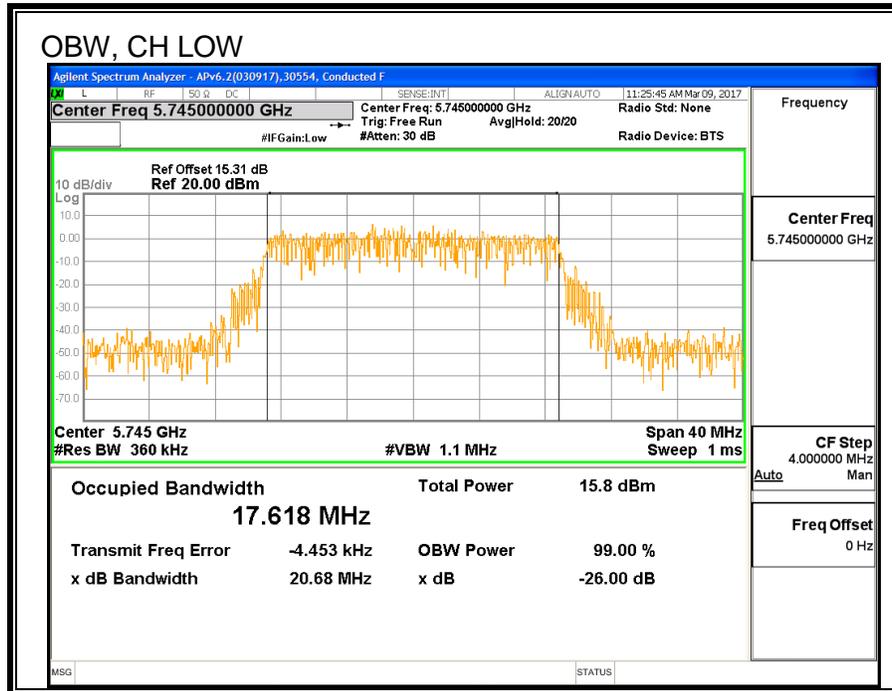

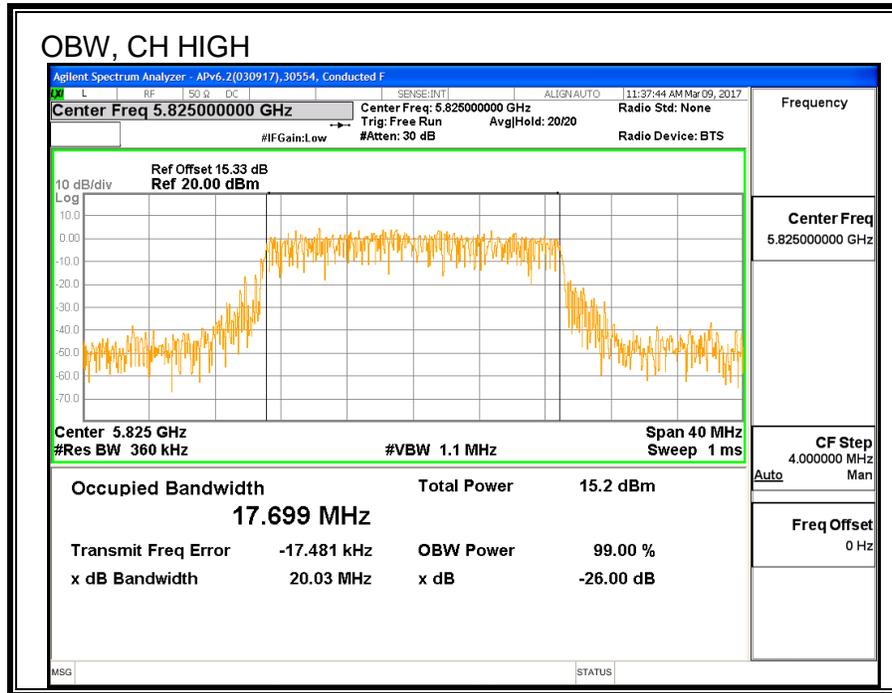

**8.34.4. AVERAGE POWER**

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

**LIMITS**

None; for reporting purposes only.

**TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>Power UAT 2 (dBm)</b>
Low	5745	19.78
Mid	5785	20.90
High	5825	19.42

### 8.34.5. OUTPUT POWER

<b>ID:</b>	30554	<b>Date:</b>	3/9/17
------------	-------	--------------	--------

#### LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	0.68	30.00
Mid	5785	0.68	30.00
High	5825	0.68	30.00

**Output Power Results**

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	19.78	19.78	30.00	-10.22
Mid	5785	20.90	20.90	30.00	-9.10
High	5825	19.42	19.42	30.00	-10.58

---

### **8.34.6. POWER SPECTRAL DENSITY**

#### **LIMITS**

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

PSD Test Procedure: KDB 789033 D02 v01r04 Section F (Method SA-2)

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**



**Antenna Gain and Limits**


Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	0.68	30.00
Mid	5785	0.68	30.00
High	5825	0.68	30.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**PSD Results**

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/500k Hz)	Total Corr'd PSD (dBm/500k Hz)	PSD Limit (dBm/500k Hz)	PSD Margin (dB)
Low	5745	7.11	7.11	30.00	-22.89
Mid	5785	7.54	7.54	30.00	-22.46
High	5825	7.20	7.20	30.00	-22.80

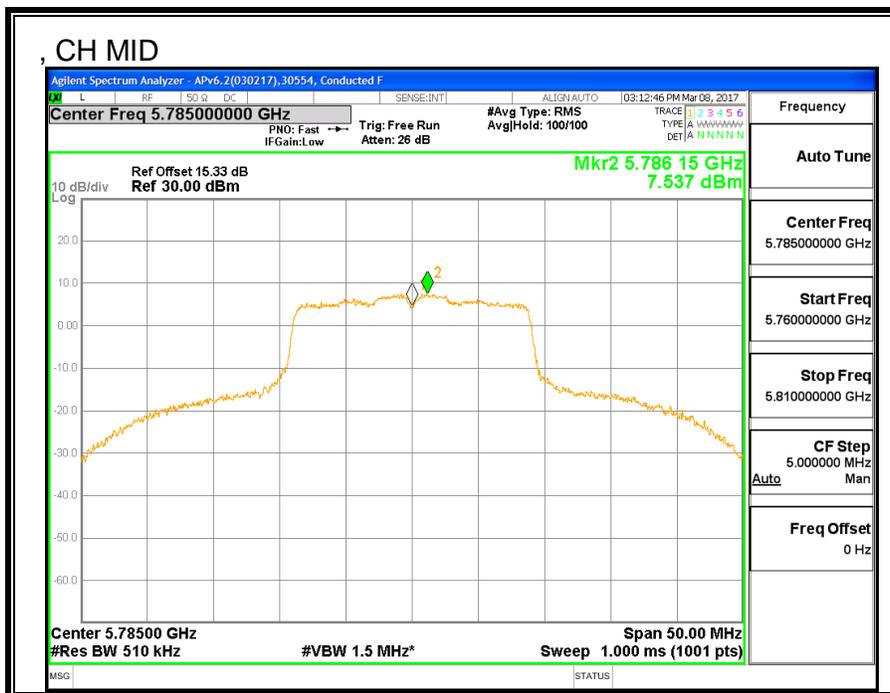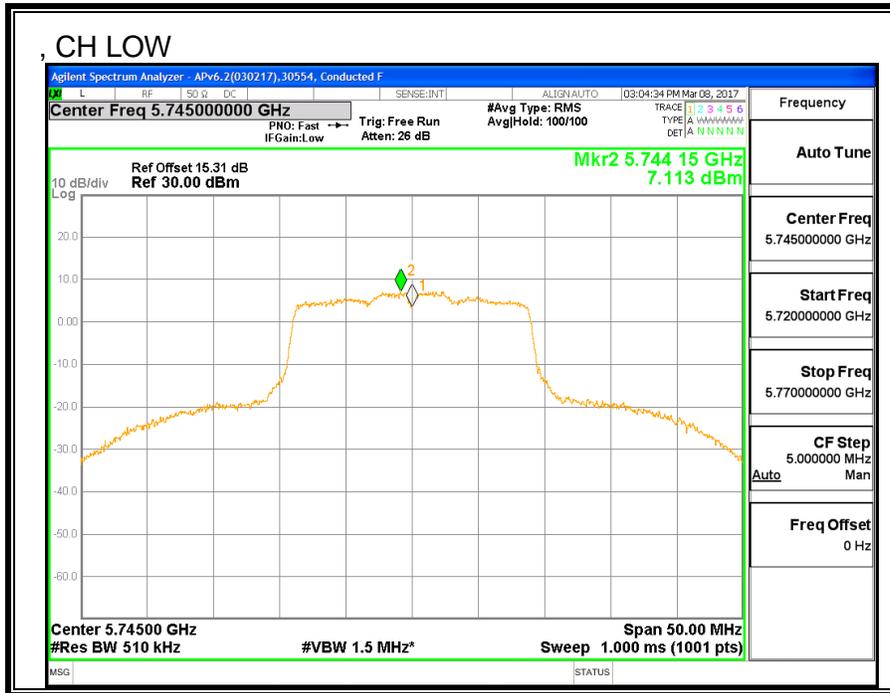

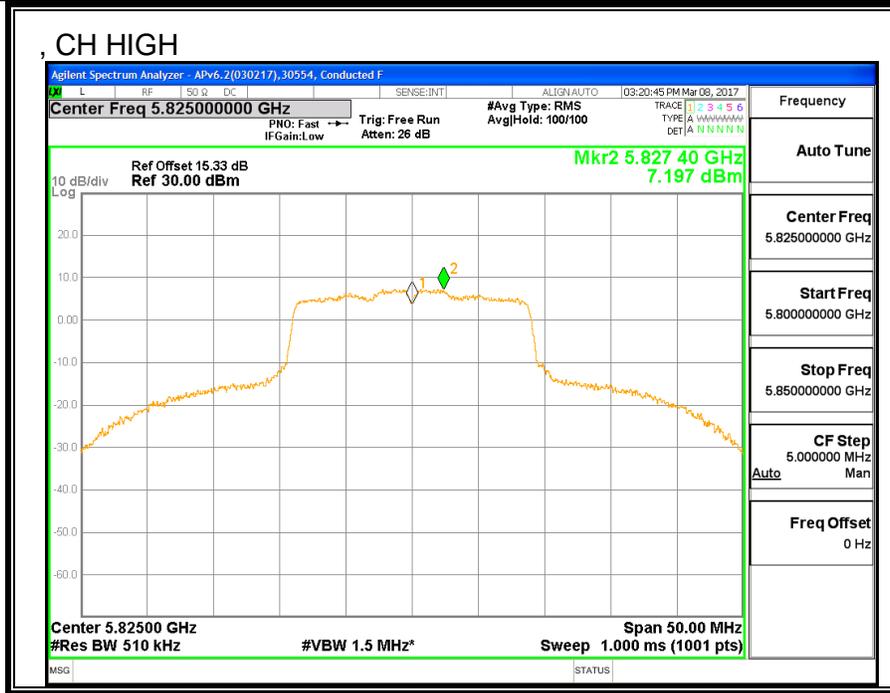

**8.35. 11n HT20 LAT 3 SISO MODE IN THE 5.8GHz BAND**

**8.35.1. 6 dB BANDWIDTH**



**LIMITS**


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

**RESULTS**

Channel	Frequency	6 dB BW LAT 3 (MHz)	Minimum Limit (MHz)
Low	5745	17.60	0.5
Mid	5785	17.60	0.5
High	5825	17.25	0.5

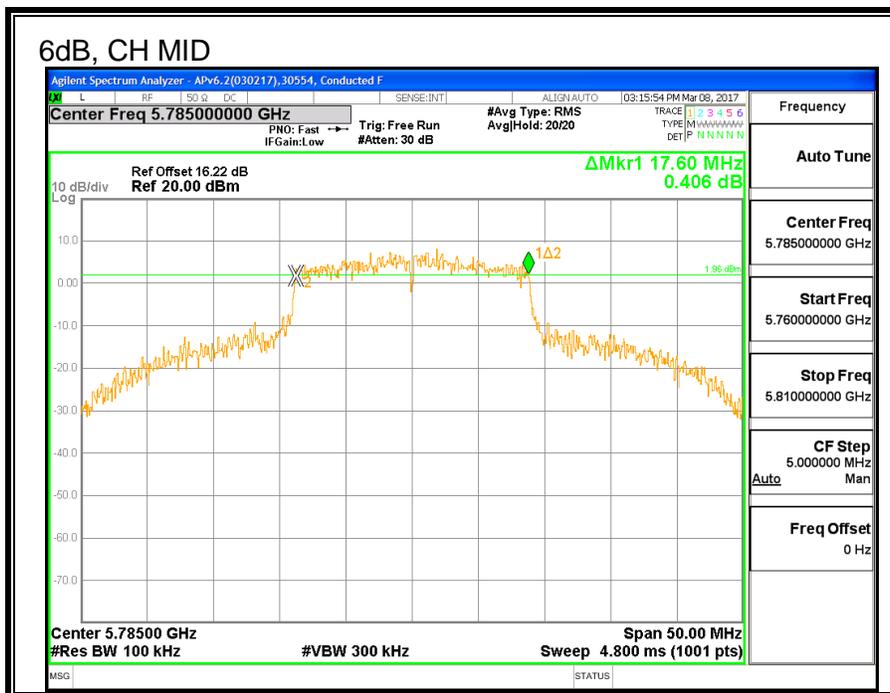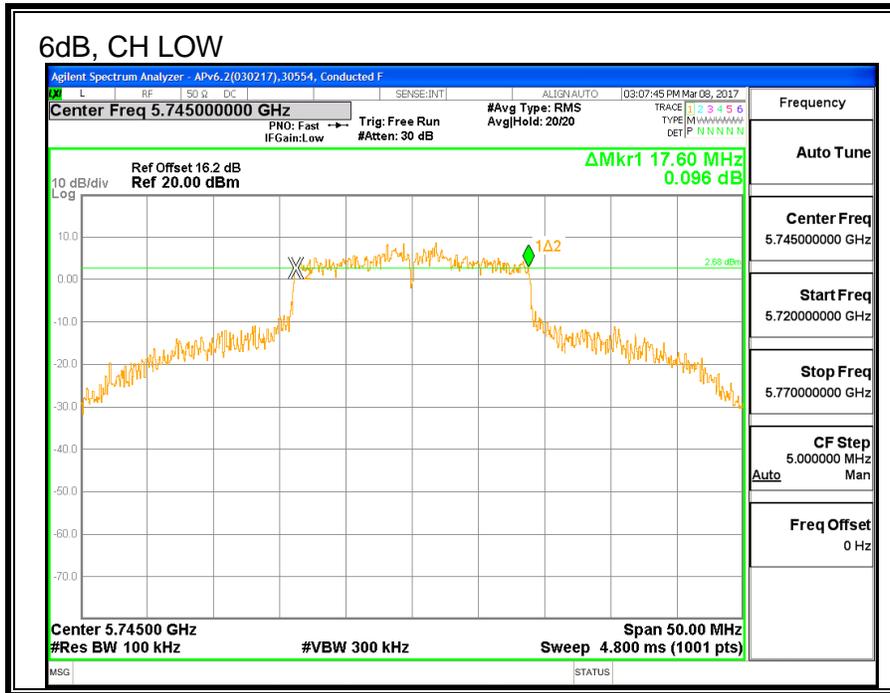

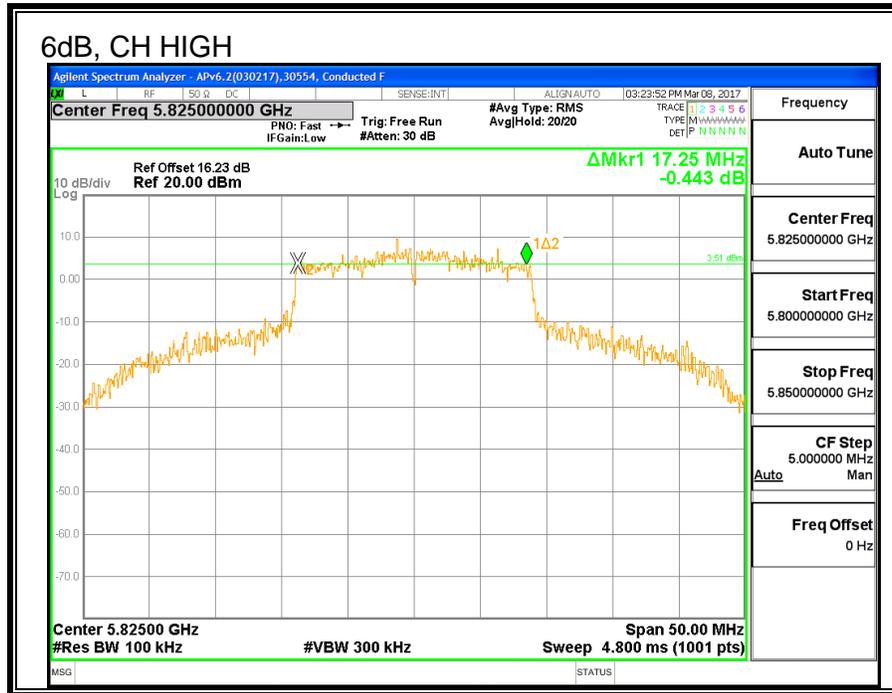

---



### 8.35.2. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5745	21.90
Mid	5785	21.95
High	5825	22.15

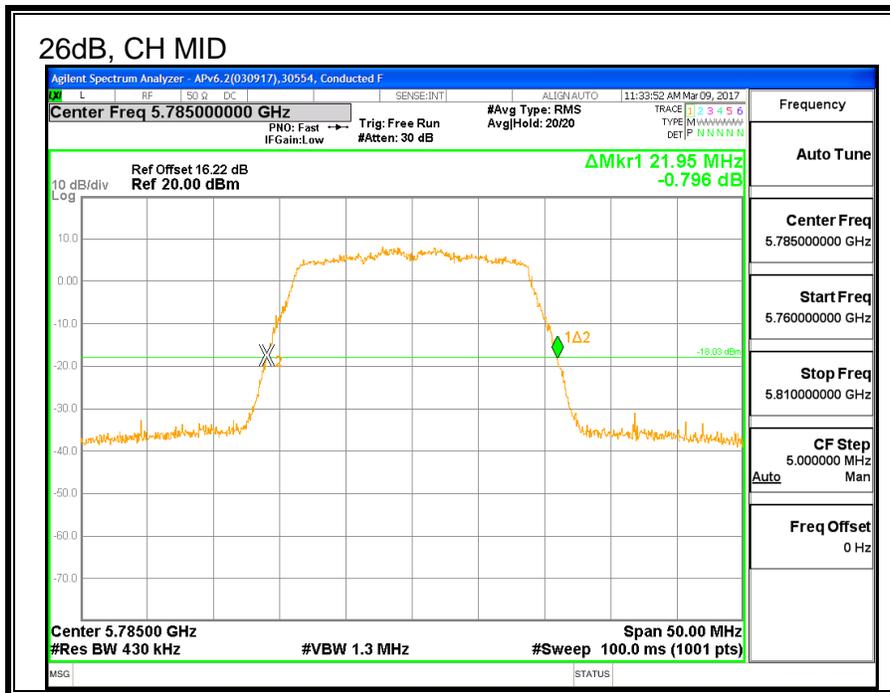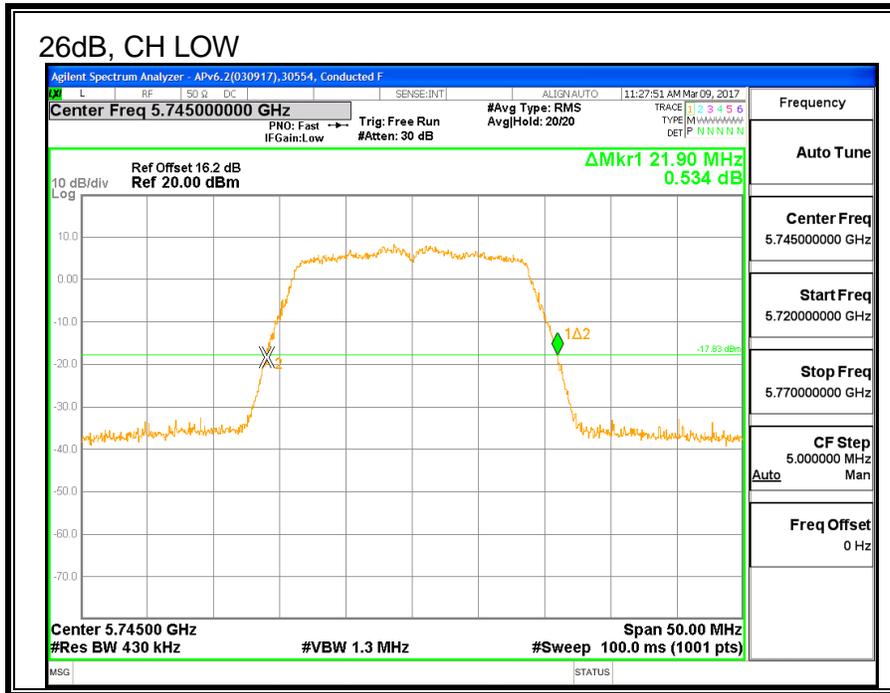

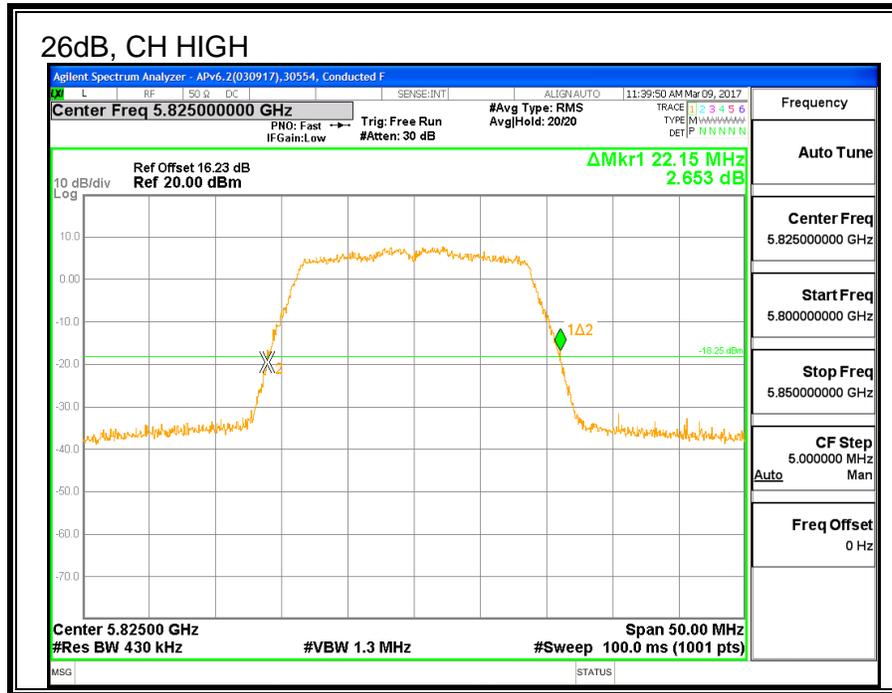



**8.35.3. 99% BANDWIDTH**

**LIMITS**

None; for reporting purposes only.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>99% BW LAT 3 (MHz)</b>
Low	5745	17.814
Mid	5785	17.661
High	5825	17.696

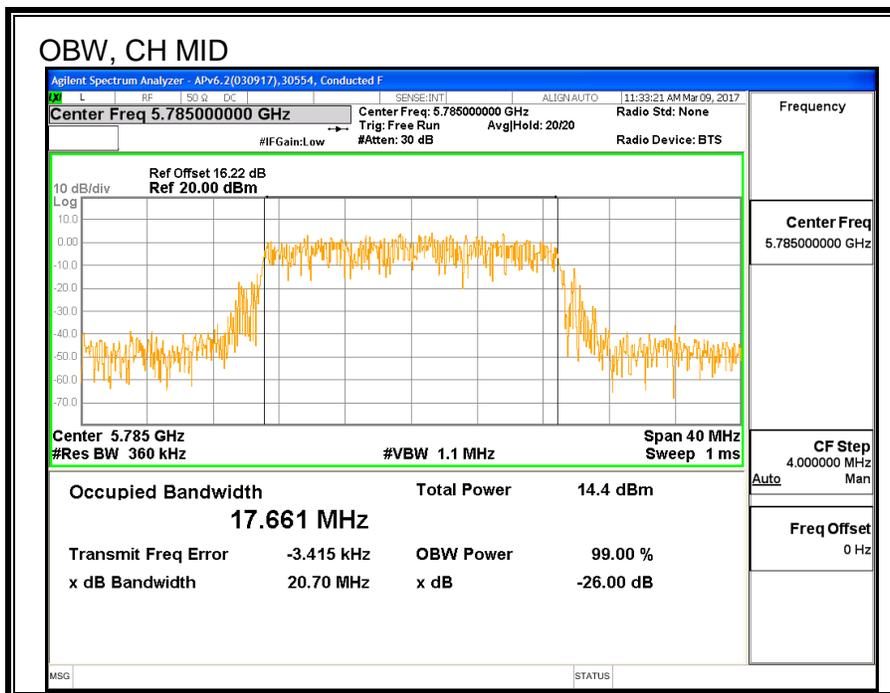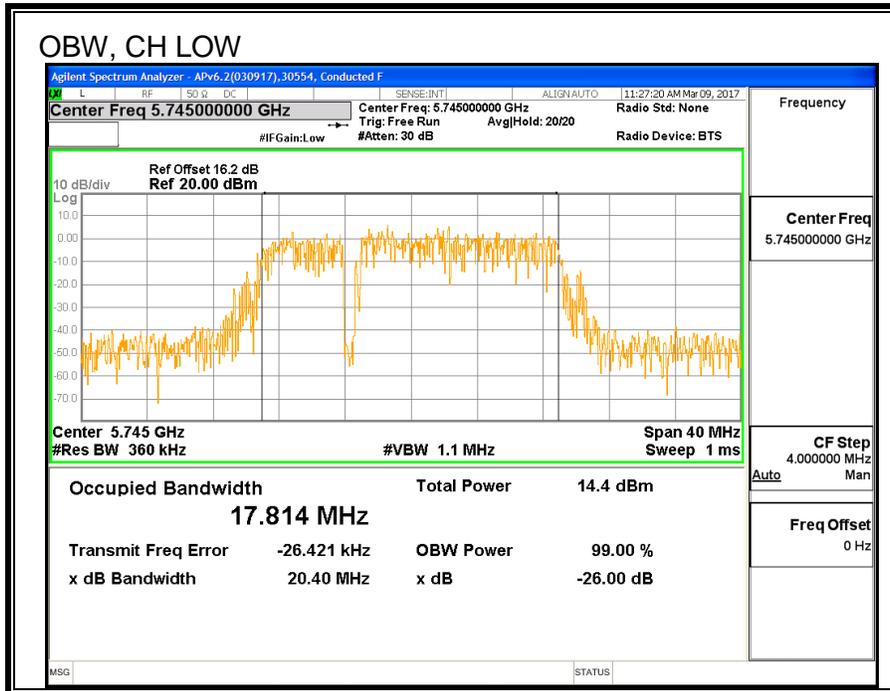



**8.35.4. AVERAGE POWER**

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

**LIMITS**

None; for reporting purposes only.

**TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

**RESULTS**

<b>Channel</b>	<b>Frequency</b>	<b>Power LAT 3 (dBm)</b>
Low	5745	19.75
Mid	5785	20.79
High	5825	19.38

---

### 8.35.5. OUTPUT POWER

<b>ID:</b>	30554	<b>Date:</b>	3/9/2017
------------	-------	--------------	----------

#### **LIMITS**

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	-0.93	30.00
Mid	5785	-0.93	30.00
High	5825	-0.93	30.00

**Output Power Results**

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	19.75	19.75	30.00	-10.25
Mid	5785	20.79	20.79	30.00	-9.21
High	5825	19.38	19.38	30.00	-10.62