



CERTIFICATION TEST REPORT

Report Number. : 12696945-E4V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2221

FCC ID : BCG-E3304A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
August 06, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	7/19/2019	Initial Issue	Chris Xiong
V2	8/6/2019	Addressed TCB Questions. Updated Sections 8.3.12, 8.3.18, and 8.3.24	Tony Li

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. EUT DESCRIPTION	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.4. SOFTWARE AND FIRMWARE.....	12
5.5. WORST-CASE CONFIGURATION AND MODE	13
5.6. DESCRIPTION OF TEST SETUP.....	14
6. MEASUREMENT METHOD.....	19
7. TEST AND MEASUREMENT EQUIPMENT	20
8. ANTENNA PORT TEST RESULTS	21
8.1. ON TIME AND DUTY CYCLE	21
8.2. 26 dB BANDWIDTH.....	25
8.2.1. 802.11n HT20 MODE IN THE 5.2 GHz BAND	26
8.2.2. 802.11n HT40 MODE IN THE 5.2 GHz BAND	30
8.2.3. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	32
8.2.4. 802.11ax HE20 MODE IN THE 5.2 GHz BAND	34
8.2.5. 802.11ax HE40 MODE IN THE 5.2 GHz BAND	50
8.2.6. 802.11ax HE80 MODE IN THE 5.2 GHz BAND	58
8.2.7. 802.11n HT20 MODE IN THE 5.3 GHz BAND	64
8.2.8. 802.11n HT40 MODE IN THE 5.3 GHz BAND	68
8.2.9. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	70
8.2.10. 802.11ax HE20 MODE IN THE 5.3 GHz BAND	72
8.2.11. 802.11ax HE40 MODE IN THE 5.3 GHz BAND	88
8.2.12. 802.11ax HE80 MODE IN THE 5.3 GHz BAND	96
8.2.13. 802.11n HT20 MODE IN THE 5.6 GHz BAND	102
8.2.14. 802.11n HT40 MODE IN THE 5.6 GHz BAND	106

8.2.15.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	110
8.2.16.	802.11ax HE20 MODE IN THE 5.6 GHz BAND	114
8.2.17.	802.11ax HE40 MODE IN THE 5.6 GHz BAND	130
8.2.18.	802.11ax HE80 MODE IN THE 5.6 GHz	146
8.2.19.	802.11n HT20 MODE IN THE 5.8 GHz BAND	162
8.2.20.	802.11n HT40 MODE IN THE 5.8 GHz BAND	166
8.2.21.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	168
8.2.22.	802.11ax HE20 MODE IN THE 5.8 GHz BAND	170
8.2.23.	802.11ax HE40 MODE IN THE 5.8 GHz BAND	186
8.2.24.	802.11ax HE80 MODE IN THE 5.8 GHz BAND	194
8.3.	99% BANDWIDTH.....	200
8.3.1.	802.11n HT20 MODE IN THE 5.2 GHz BAND	201
8.3.2.	802.11n HT40 MODE IN THE 5.2 GHz BAND	205
8.3.3.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	207
8.3.4.	802.11ax HE20 MODE IN THE 5.2 GHz BAND	209
8.3.5.	802.11ax HE40 MODE IN THE 5.2 GHz BAND	225
8.3.6.	802.11ax HE80 MODE IN THE 5.2 GHz BAND	233
8.3.7.	802.11n HT20 MODE IN THE 5.3 GHz BAND	239
8.3.8.	1802.11n HT40 MODE IN THE 5.3 GHz BAND	243
8.3.9.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	245
8.3.10.	802.11ax HE20 MODE IN THE 5.3 GHz BAND	247
8.3.11.	802.11ax HE40 MODE IN THE 5.3 GHz BAND	263
8.3.12.	802.11ax HE80 MODE IN THE 5.3 GHz BAND	271
8.3.13.	802.11n HT20 MODE IN THE 5.6 GHz BAND	277
8.3.14.	802.11n HT40 MODE IN THE 5.6 GHz BAND	281
8.3.15.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	285
8.3.16.	802.11ax HE20 MODE IN THE 5.6 GHz BAND	289
8.3.17.	802.11ax HE40 MODE IN THE 5.6 GHz BAND	305
8.3.18.	802.11ax HE80 MODE IN THE 5.6 GHz BAND	321
8.3.19.	802.11n HT20 MODE IN THE 5.8 GHz BAND	337
8.3.20.	802.11n HT40 MODE IN THE 5.8 GHz BAND	341
8.3.21.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	343
8.3.22.	802.11ax HE20 MODE IN THE 5.8 GHz BAND	345
8.3.23.	802.11ax HE40 MODE IN THE 5.8 GHz BAND	361
8.3.24.	802.11ax HE80 MODE IN THE 5.8 GHz BAND	369
8.4.	6 dB BANDWIDTH.....	375
8.4.1.	802.11n HT20 MODE IN THE 5.8 GHz BAND	376
8.4.2.	802.11n HT40 MODE IN THE 5.8 GHz BAND	380
8.4.3.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	384
8.4.4.	802.11ax HE20 MODE IN THE 5.8 GHz BAND	386
8.4.5.	802.11ax HE40 MODE IN THE 5.8 GHz BAND	402
8.4.6.	802.11ax HE80 MODE IN THE 5.8 GHz BAND	418
8.5.	OUTPUT POWER AND PSD.....	426
8.5.1.	802.11n HT20 MODE IN THE 5.2 GHz BAND (FCC).....	428
8.5.2.	802.11n HT40 MODE IN THE 5.2 GHz BAND (FCC).....	434
8.5.3.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND (FCC)	440
8.5.4.	802.11ax HE20 MODE IN THE 5.2 GHz BAND (FCC).....	446
8.5.5.	802.11ax HE40 MODE IN THE 5.2 GHz BAND (FCC).....	470
8.5.6.	802.11ax HE80 MODE IN THE 5.2 GHz BAND (FCC).....	494
8.5.7.	802.11n HT20 MODE IN THE 5.3 GHz BAND	506
8.5.8.	802.11n HT40 MODE IN THE 5.3 GHz BAND	512

8.5.9.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	516
8.5.10.	802.11ax HE20 MODE IN THE 5.3 GHz BAND	519
8.5.11.	802.11ax HE40 MODE IN THE 5.3 GHz BAND	543
8.5.12.	802.11ax HE80 MODE IN THE 5.3 GHz BAND	559
8.5.13.	802.11n HT20 MODE IN THE 5.6 GHz BAND	571
8.5.14.	802.11n HT40 MODE IN THE 5.6 GHz BAND	578
8.5.15.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	585
8.5.16.	802.11ax HE20 MODE IN THE 5.6 GHz BAND	591
8.5.17.	802.11ax HE40 MODE IN THE 5.6 GHz BAND	619
8.5.18.	802.11ax HE80 MODE IN THE 5.6 GHz BAND	647
8.5.19.	802.11n HT20 MODE IN THE 5.8 GHz BAND	671
8.5.20.	802.11n HT40 MODE IN THE 5.8 GHz BAND	678
8.5.21.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	685
8.5.22.	802.11ax HE20 MODE IN THE 5.8 GHz BAND	691
8.5.23.	802.11ax HE40 MODE IN THE 5.8 GHz BAND	719
8.5.24.	802.11ax HE80 MODE IN THE 5.8 GHz BAND	747

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2221

SERIAL NUMBER: C7CYQ00BMTCF; C7CYG01XMCHV

DATE TESTED: FEBRUARY 21, 2019 to AUGUST 6, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Tony Li
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D06 v02, FCC KDB 789033 D02 v02r01, ANSI C63.10-2013, FCC 06-96.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
☒ Chamber A (ISED:2324B-1)	☒ Chamber D (ISED:22541-1)	☐ Chamber I (ISED:2324A-5)
☒ Chamber B (ISED:2324B-2)	☒ Chamber E (ISED:22541-2)	☐ Chamber J (ISED:2324A-6)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	☐ Chamber K (ISED:2324A-1)
	☒ Chamber G (ISED:22541-4)	☐ Chamber L (ISED:2324A-3)
	☒ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2 GHz BAND (FCC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.2 GHz band, 1TX			
5180-5240	802.11a	Covered by 802.11n HT20 1TX	
5180-5240	802.11n HT20	20.73	118.30
5190-5230	802.11n HT40	21.24	133.05
5180-5240	802.11ac VHT20	Covered by 802.11n HT20 1TX	
5190-5230	802.11ac VHT40	Covered by 802.11n HT40 1TX	
5210	802.11ac VHT80	17.21	52.60
5180-5240	802.11ax HE20	20.73	118.30
5190-5230	802.11ax HE40	21.21	132.13
5210	802.11ax HE80	15.70	37.15
5.2 GHz band, 2TX			
5180-5240	802.11n HT20 CDD	20.74	118.58
5180-5240	802.11n HT20 SDM/STBC	Covered by 802.11n HT20 2TX CDD	
5190-5230	802.11n HT40 CDD	22.73	187.50
5190-5230	802.11n HT40 SDM/STBC	Covered by 802.11n HT40 2TX CDD	
5180-5240	802.11ac VHT20 SDM/STBC/CDD	Covered by 802.11n HT20 2TX CDD	
5190-5230	802.11ac VHT40 SDM/STBC/CDD	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 CDD	19.20	83.18
5210	802.11ac VHT80 SDM/STBC	Covered by 802.11ac VHT80 2TX CDD	
5180-5240	802.11ax HE20 OFDMA	20.71	117.76
5190-5230	802.11ax HE40 OFDMA	22.73	187.50
5210	802.11ax HE80 OFDMA	17.83	60.67

5.3 GHz BAND (FCC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.3 GHz band, 1TX			
5260 - 5320	802.11a	Covered by 802.11n HT20 1TX	
5260 - 5320	802.11n HT20	20.74	118.58
5270 - 5310	802.11n HT40	21.21	132.13
5260 - 5320	802.11ac VHT20	Covered by 802.11n HT20 1TX	
5270 - 5310	802.11ac VHT40	Covered by 802.11n HT40 1TX	
5290	802.11ac VHT80	17.23	52.84
5260 - 5320	802.11ax HE20	20.70	117.49
5270 - 5310	802.11ax HE40	21.23	132.74
5290	802.11ax HE80	15.74	37.50
5.3 GHz band, 2TX			
5260 - 5320	802.11n HT20 CDD	20.75	118.85
5260 - 5320	802.11n HT20 SDM/STBC	Covered by 802.11n HT40 2TX CDD	
5270 - 5310	802.11n HT40 CDD	22.75	188.36
5270 - 5310	802.11n HT40 SDM/STBC	Covered by 802.11n HT40 2TX CDD	
5260 - 5320	802.11ac VHT20 SDM/STBC/CDD	Covered by 802.11n HT20 2TX CDD	
5270 - 5310	802.11ac VHT40 SDM/STBC/CDD	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 CDD	19.23	83.75
5290	802.11ac VHT80 SDM/STBC	Covered by 802.11ac VHT80 2TX CDD	
5260 - 5320	802.11ax HE20 OFDMA	20.75	118.85
5270 - 5310	802.11ax HE40 OFDMA	22.76	188.80
5290	802.11ax HE80 OFDMA	17.73	59.29

5.6 GHz BAND (FCC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 1TX			
5500-5720	802.11a	Covered by 802.11n HT20 1TX	
5500-5720	802.11n HT20	20.74	118.58
5510-5710	802.11n HT40	21.39	137.72
5500-5720	802.11ac VHT20	Covered by 802.11n HT20 1TX	
5510-5710	802.11ac VHT40	Covered by 802.11n HT40 1TX	
5530-5690	802.11ac VHT80	21.50	141.25
5500-5720	802.11ax HE20	20.91	123.31
5510-5710	802.11ax HE40	21.24	133.05
5530-5690	802.11ax HE80	21.44	139.32
5.6 GHz band, 2TX			
5500-5720	802.11n HT20 CDD	20.72	118.03
5500-5720	802.11n HT20 SDM/STBC	Covered by 802.11n HT40 2TX CDD	
5510-5710	802.11n HT40 CDD	22.73	187.50
5510-5710	802.11n HT40 SDM/STBC	Covered by 802.11n HT40 2TX CDD	
5500-5720	802.11ac VHT20 SDM/STBC/CDD	Covered by 802.11n HT20 2TX CDD	
5510-5710	802.11ac VHT40 SDM/STBC/CDD	Covered by 802.11n HT40 2TX CDD	
5530-5690	802.11ac VHT80 CDD	22.72	187.07
5530-5690	802.11ac VHT80 SDM/STBC	Covered by 802.11ac VHT80 2TX CDD	
5500-5720	802.11ax HE20 OFDMA	20.73	118.30
5510-5710	802.11ax HE40 OFDMA	22.71	186.64
5530-5690	802.11ax HE80 OFDMA	22.71	186.64

5.8 GHz BAND (FCC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.8 GHz band, 1TX			
5745-5825	802.11a	Covered by 802.11n HT20 1TX	
5745-5825	802.11n HT20	21.22	132.43
5755-5795	802.11n HT40	21.23	132.74
5745-5825	802.11ac VHT20	Covered by 802.11n HT20 1TX	
5755-5795	802.11ac VHT40	Covered by 802.11n HT40 1TX	
5775	802.11ac VHT80	21.17	130.92
5745-5825	802.11ax HE20	21.24	133.05
5755-5795	802.11ax HE40	21.25	133.35
5775	802.11ax HE80	21.23	132.74
5.8 GHz band, 2TX			
5745-5825	802.11n HT20 CDD	24.22	264.24
5745-5825	802.11n HT20 SDM/STBC	Covered by 802.11n HT40 2TX CDD	
5755-5795	802.11n HT40 CDD	24.21	263.63
5755-5795	802.11n HT40 SDM/STBC	Covered by 802.11n HT40 2TX CDD	
5745-5825	802.11ac VHT20 STM/STBC/CDD	Covered by 802.11n HT20 2TX CDD	
5755-5795	802.11ac VHT40 STM/STBC/CDD	Covered by 802.11n HT40 2TX CDD	
5775	802.11ac VHT80 CDD	24.24	265.46
5775	802.11ac VHT80 SDM/STBC	Covered by 802.11ac VHT80 2TX CDD	
5745-5825	802.11ax HE20 OFDMA	24.22	264.24
5755-5795	802.11ax HE40 OFDMA	24.21	263.63
5775	802.11ax HE80 OFDMA	23.24	210.86

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range	Antenna 4(Core 0)	Antenna Ant 5(Core 1)
5180 - 5240	-6.0	-1.1
5260 - 5320	-5.8	-1.3
5500 - 5720	-4.0	-1.2
5745 - 5825	-4.1	-1.7

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was WiFi FW Version: 18_20_56_1.

5.5. WORST-CASE CONFIGURATION AND MODE

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z on Ant 4 (Core 0) and Ant 5 (Core 1), it was determined that X (Flatbed) orientation was the worst-case orientation for Ant 4; and Y (Landscape) orientation was the worst case for Ant 5 and 2TX.

For radiated harmonics spurious below 1GHz, 1-18GHz L/M/H channels, 18-40GHz, and power line conducted emissions were performed with the EUT set at the 2TX CDD mode among the CDD/SDM modes and 2TX HE mode with power setting equal or higher than SISO modes as worst-case scenario.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

There were no emissions found below 30MHz within 20dB of the limit.

The output power and psd for the 802.11 ax mode were investigated between all different tones, and we found that the highest tone had the highest output power and lowest tone had the highest PSD readings. Therefore, full testing was performed on both the highest and lowest tones.

For simultaneous transmission of multiple channels in the UWB, LTE, 2.4 GHz WiFi, 5 GHz WiFi and Bluetooth bands, no noticeable new emission was found.

Investigated worst-case data rates as listed below were:

802.11n HT20mode: MCS0
802.11n HT40mode: MCS0
802.11ac VHT80 mode: MCS0
802.11ax HE20/HE40/HE80 FULL RU & RU26

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	MacBook Pro	HRP003436	QDS-BRCM1080
AC Adapter	Apple	A1385	D29325SM03XDHLHC9	N/A
Dongle	N/A	N/A	N/A	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP CONDUCTED PORT

The EUT is connected to a test laptop during the tests. Test software exercised the EUT

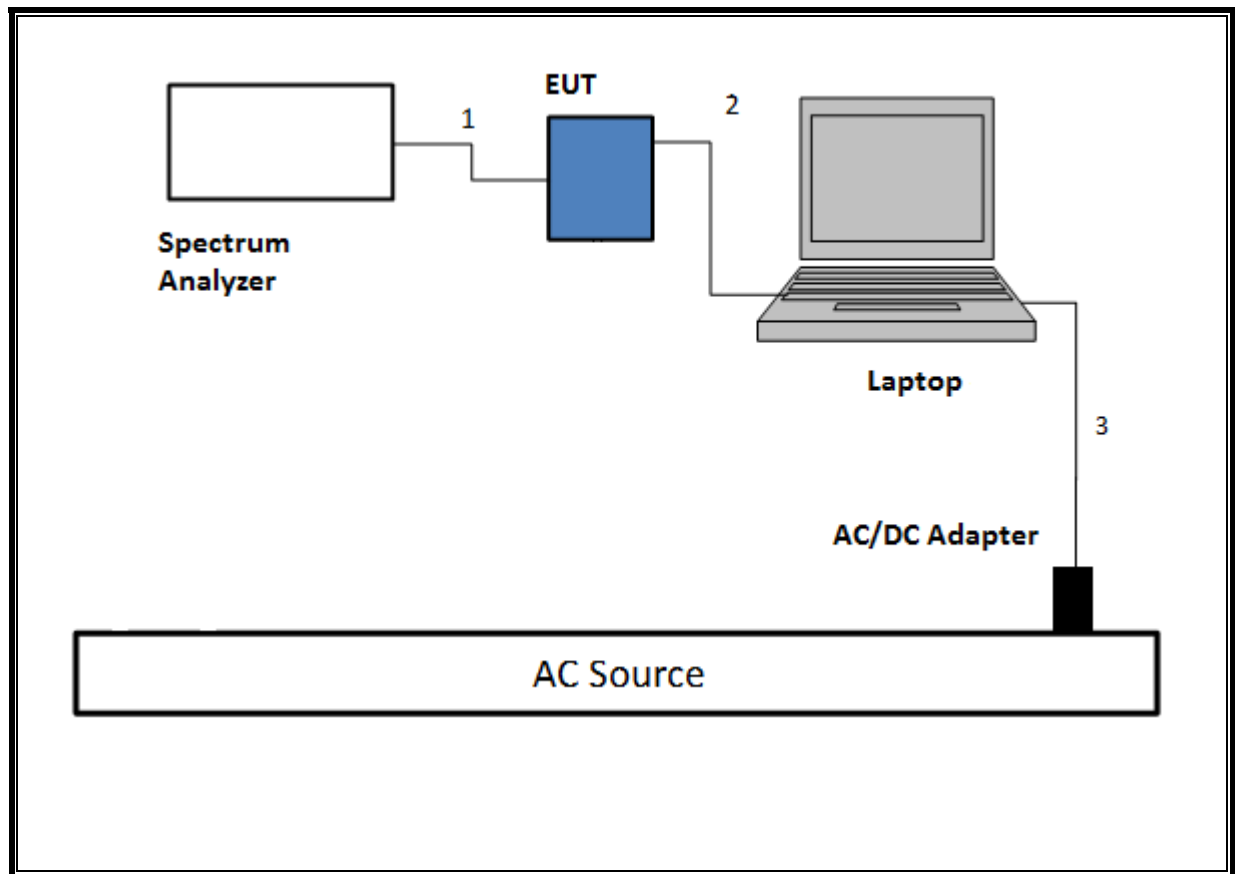SETUP DIAGRAM FOR CONDUCTED TESTS


TEST SETUP- RADIATED-ABOVE 1 GHZ


The EUT was powered by Battery. Test software exercised the EUT.

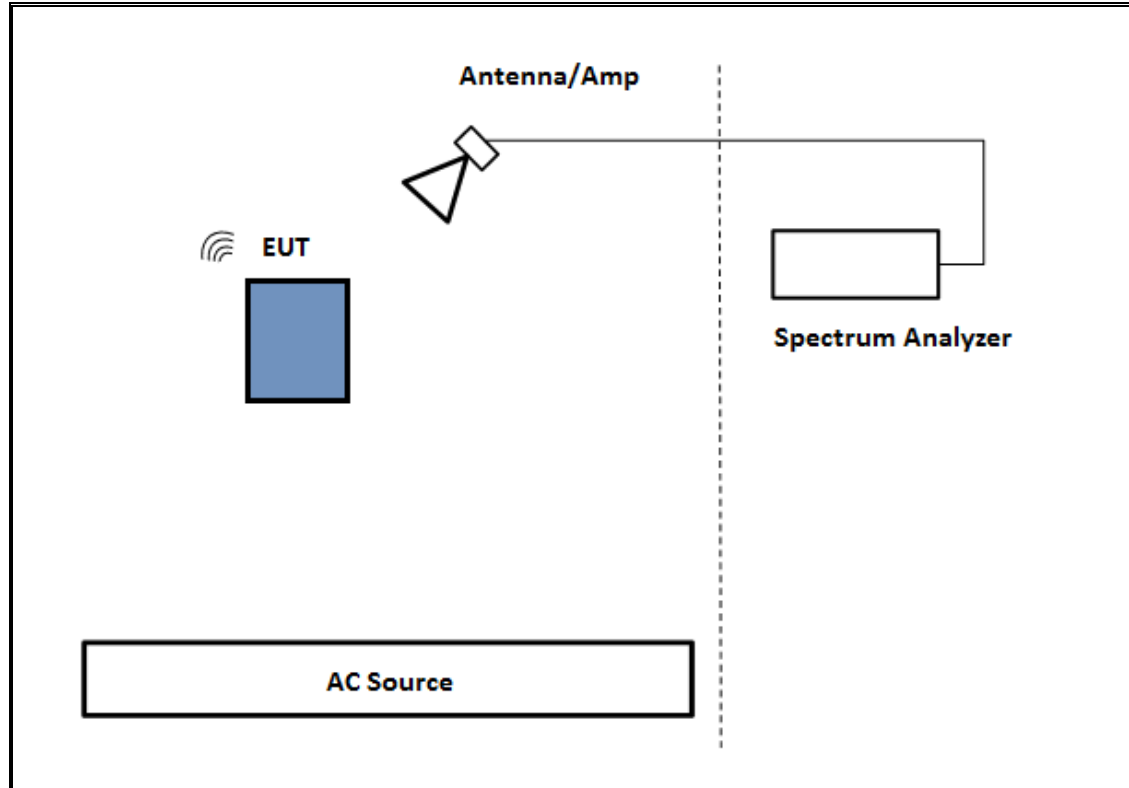SETUP DIAGRAM

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was powered by AC cord. Test software exercised the EUT.

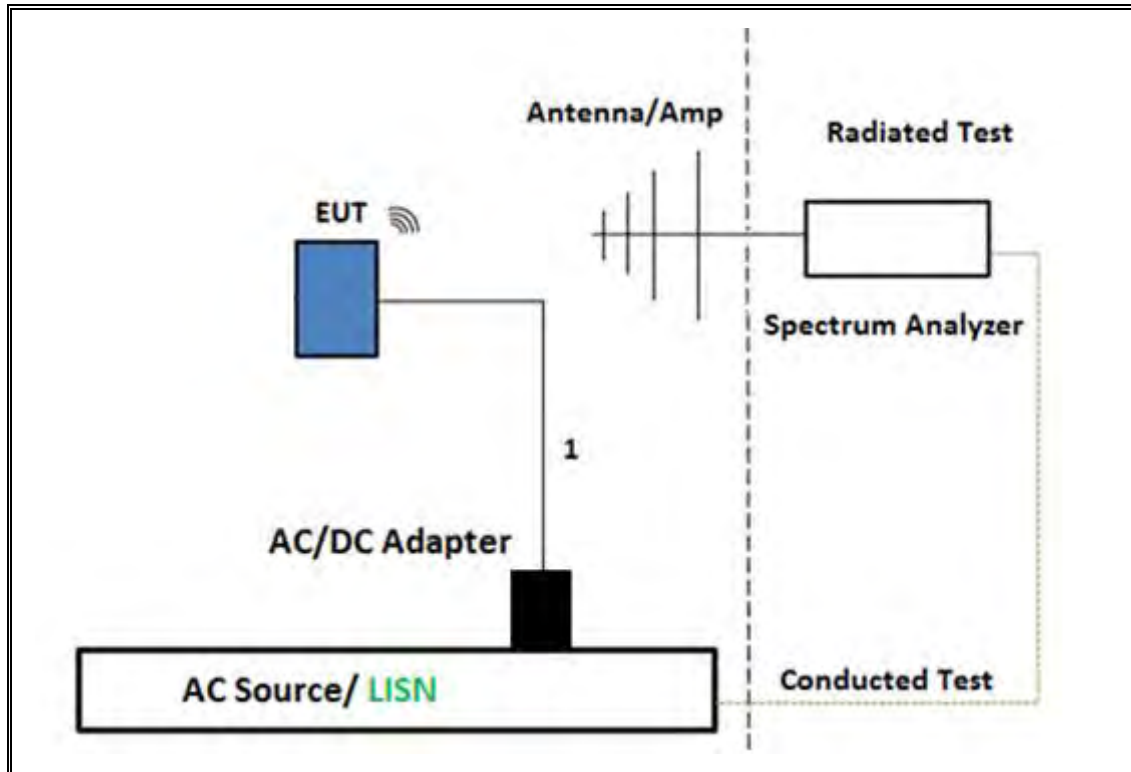SETUP DIAGRAM

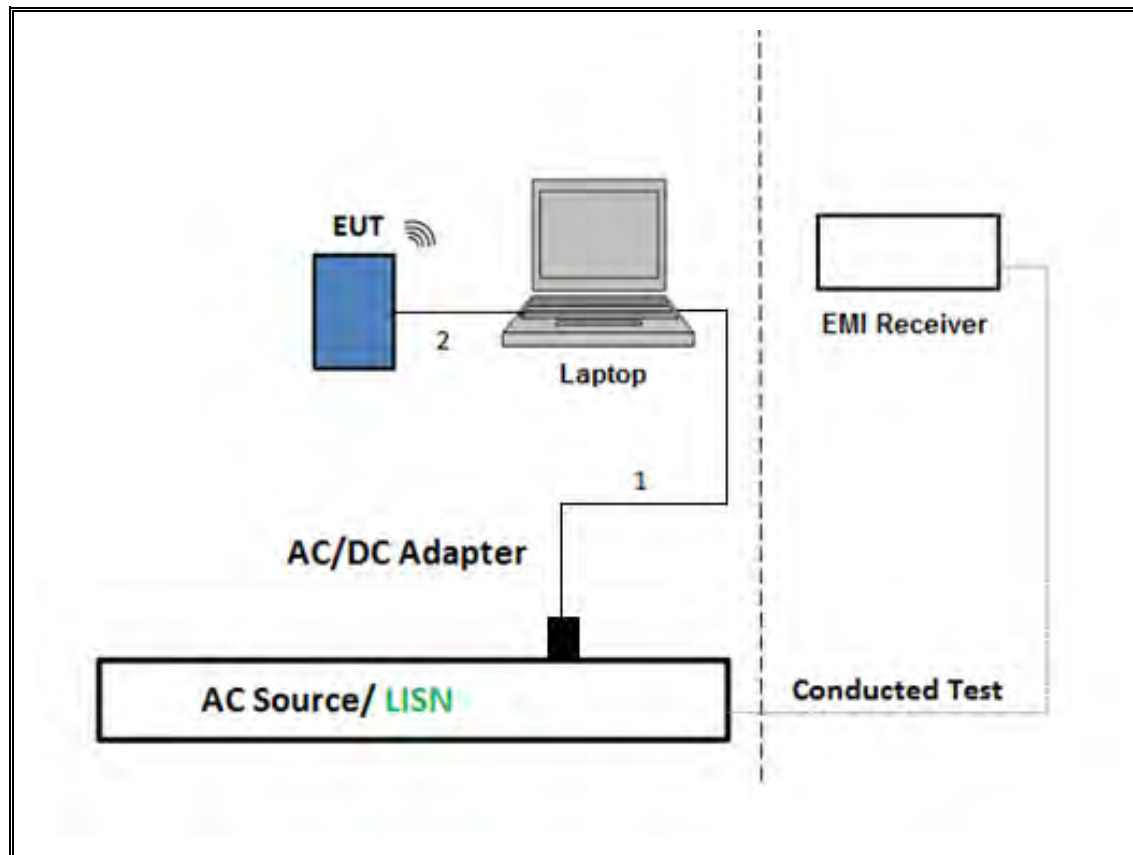TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

6. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 789033 D02 v02r01, Section B.

6 dB Emission BW: KDB 789033 D02 v02r01, Section C.2

26 dB Emission BW: KDB 789033 D02 v02r01, Section C.1

99% Occupied BW: KDB 789033 D02 v02r01, Section D.

Conducted Output Power: KDB 789033 D02 v02r01, Section E.3.b (Method PM-G) and Section E.2.d (Method SA-2)

Power Spectral Density: KDB 789033 D02 v02r01, Section F

Unwanted emissions in restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, and G.5.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID Num	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	03/22/2020
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T346	05/14/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	05/30/2020
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T136	07/02/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T712	02/26/2020
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T344	05/17/2020
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	06/16/2019
Antenna Horn 26-40GHz	ARA	MWH-2640	T90	09/11/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T122	03/21/2020
Amplifier, 1 to 18GHz, 35dB	Ampical	AMP1G18-35	138301	09/15/2019
Amplifier, 1 to 18GHz, 35dB	Ampical	AFS42-00101800-25-S-42	T1567	01/26/2020
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T931	05/11/2020
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T493	08/30/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T491	05/30/2020
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	10/06/2019
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	03/23/2020
Amplifier, 26GHz to 40GHz	Miteq	TTA2640-35-HG	T1864	03/23/2020
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T286	06/04/2019
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T905	01/24/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T342	01/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1454	01/23/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T340	01/22/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T908	01/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A-544	T1113	01/22/2020
3GHz HPF	Micro-Tronic	HPM17543	T1014	04/28/2020
Power Sensor	Keysight	N1921A	T1228	07/10/2019
Power Meter, P-series single channel	Keysight	N1912A	T1272	01/29/2020
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	09/25/2019

AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	02/14/2020
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2019
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/19/2019
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 9.9, June 4, 2019	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

*Testing is completed before equipment expiration date.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.918	1.937	0.990	99.02%	0.00	0.010
802.11n HT20 CDD	1.923	1.942	0.990	99.02%	0.00	0.010
802.11n HT40 1TX	942.9	963.3	0.979	97.88%	0.09	0.001
802.11n HT40 CDD	945.2	965.6	0.979	97.89%	0.09	0.001
802.11ac VHT80 1TX	460.1	481.7	0.955	95.52%	0.20	0.002
802.11ac VHT80 CDD	460.1	480.5	0.958	95.75%	0.19	0.002
802.11ax HE20 1Tx, 242-Tones	1.572	1.594	0.986	98.62%	0.00	0.010
802.11ax HE20 1Tx, 26-Tones	4.121	4.204	0.980	98.03%	0.00	0.010
802.11ax HE20 OFDMA, 242-Tones	1.574	1.594	0.987	98.75%	0.00	0.010
802.11ax HE20 OFDMA, 26-Tones	4.121	4.204	0.980	98.03%	0.00	0.010
802.11ax HE40 1TX, 484-Tones	1.563	1.584	0.987	98.67%	0.00	0.010
802.11ax HE40 1TX, 26-Tones	4.125	4.200	0.982	98.21%	0.00	0.010
802.11ax HE40 OFDMA, 484-Tones	1.563	1.584	0.987	98.67%	0.00	0.010
802.11ax HE40 OFDMA, 26-Tones	4.120	4.200	0.981	98.10%	0.00	0.010
802.11ax HE80 1TX, 996-Tones	1.473	1.494	0.986	98.59%	0.00	0.010
802.11ax HE80 1TX, 26-Tones	4.120	4.200	0.981	98.10%	0.00	0.010
802.11ax HE80 OFDMA, 996-Tones	1.473	1.494	0.986	98.59%	0.00	0.010
802.11ax HE80 OFDMA, 26-Tones	4.125	4.200	0.982	98.21%	0.00	0.010



DUTY CYCLE 802.11n HT20 1TX MODE



DUTY CYCLE 802.11n 2TX CDD MODE



DUTY CYCLE 802.11n HT40 1Tx MODE



DUTY CYCLE 802.11n HT40 2TX CDD MODE



DUTY CYCLE 802.11ac VHT80 1Tx MODE



DUTY CYCLE 802.11ac VHT80 2TX CDD MODE



DUTY CYCLE 802.11ax HE20 1TX 242 TONES



DUTY CYCLE 802.11ax HE20 1TX 26 TONES



DUTY CYCLE 802.11ax HE20 2TX 242 TONES



DUTY CYCLE 802.11ax HE20 2TX 26 TONES



DUTY CYCLE 802.11ax HE40 1TX 484 TONES



DUTY CYCLE 802.11ax HE40 1TX 26 TONES



8.2. 26 dB BANDWIDTH

LIMITS


None; for reporting purposes only.

RESULTS


8.2.1. 802.11n HT20 MODE IN THE 5.2 GHZ BAND

1TX Antenna 4 MODE


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.05
Mid	5200	22.35
High	5240	22.30

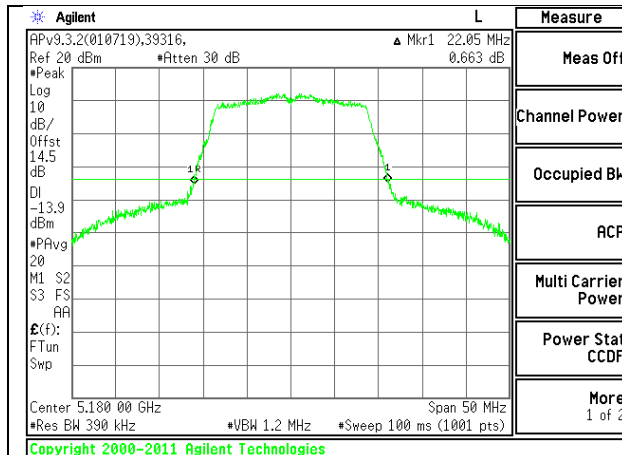

LOW CHANNEL

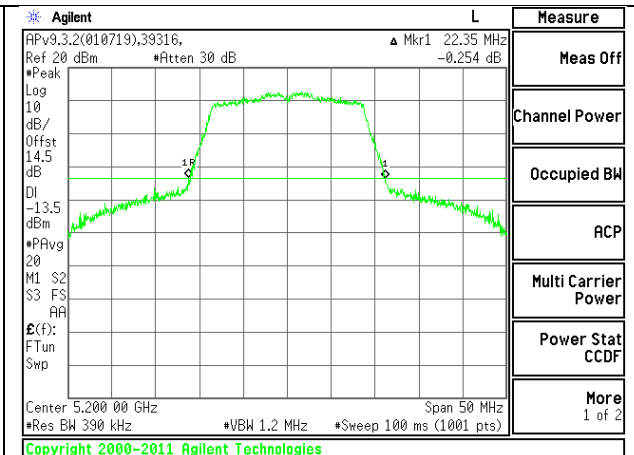




MID CHANNEL

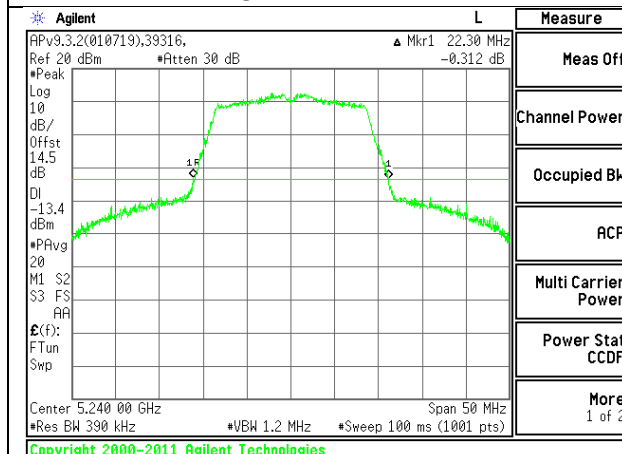

HIGH CHANNEL





1TX Antenna 5 MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5180	22.10
Mid	5200	22.20
High	5240	22.15

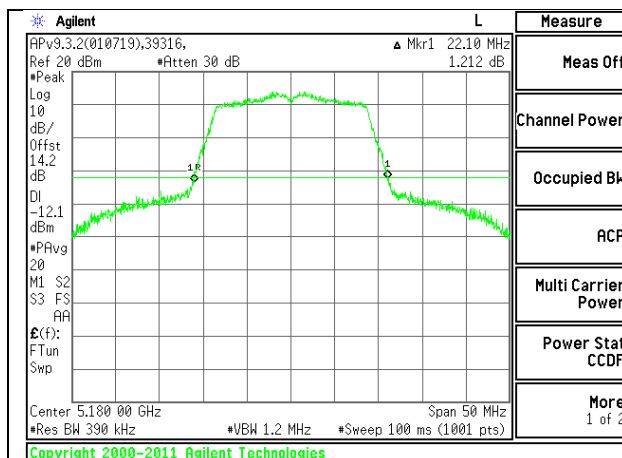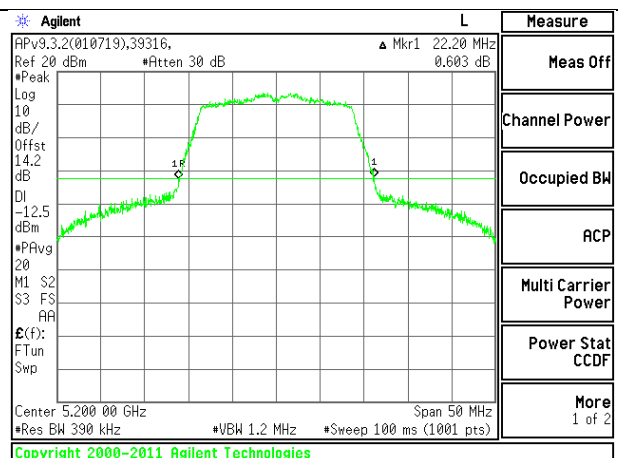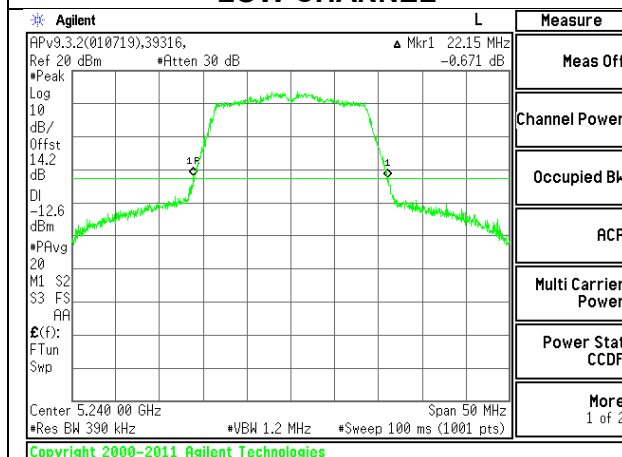**LOW CHANNEL****MID CHANNEL****HIGH CHANNEL**

2TX Antenna 4 + Antenna 5 CDD MODE

Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
	(MHz)	Ant 4	Ant 5
Low	5180	21.95	21.70
Mid	5200	22.05	21.75
High	5240	22.10	21.85

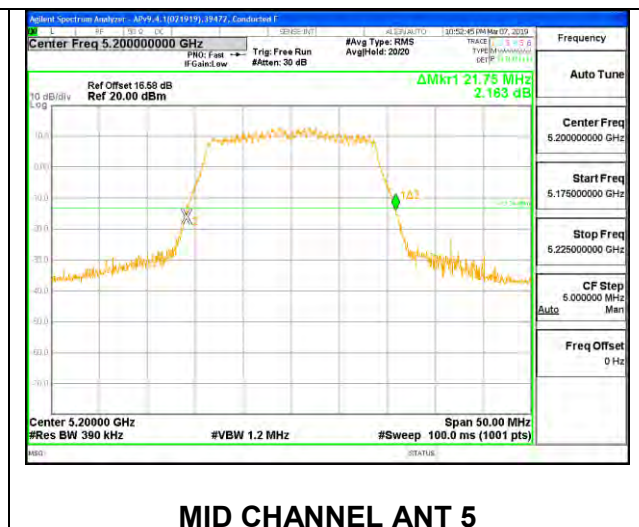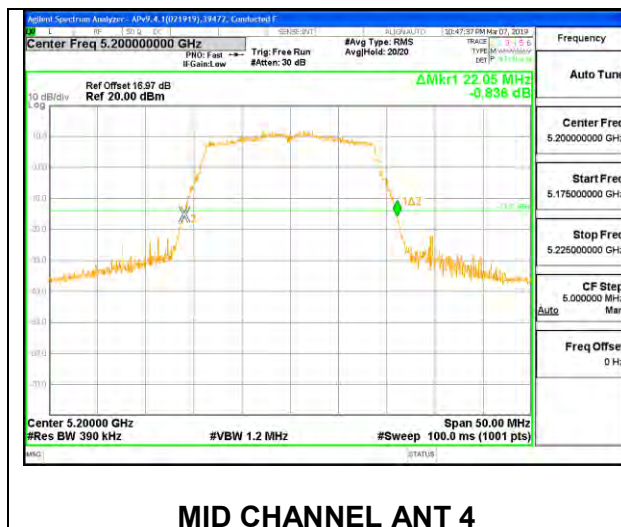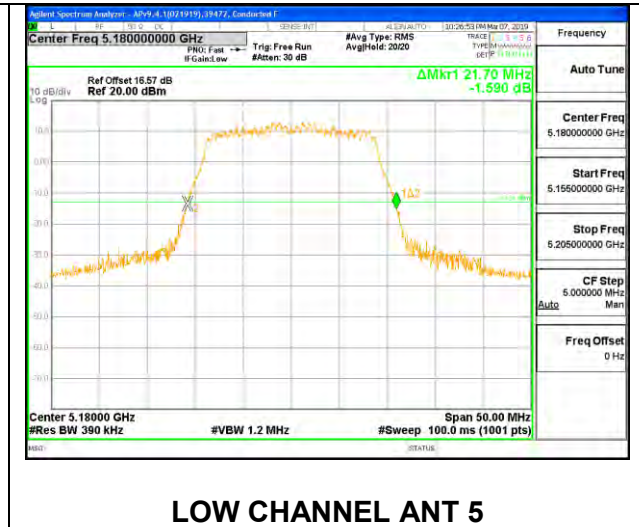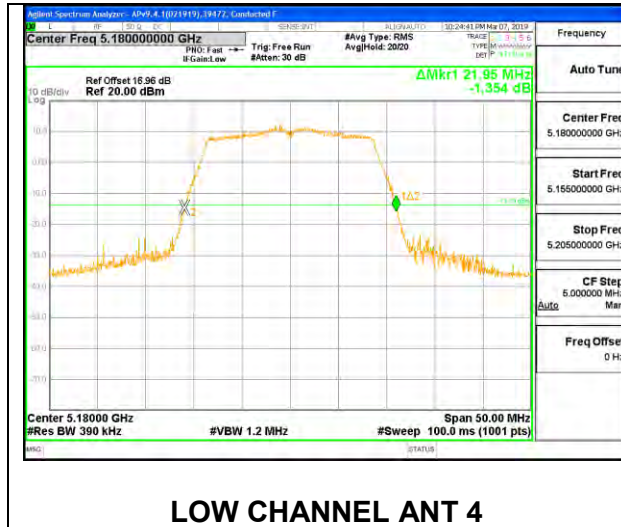

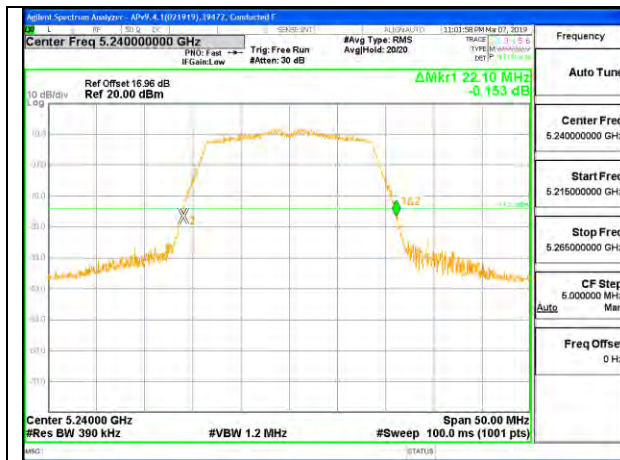

HIGH CHANNEL ANT 4




HIGH CHANNEL ANT 5

8.2.2. 802.11n HT40 MODE IN THE 5.2 GHz BAND


1TX Antenna 4 MODE

Channel	Frequency	26dB Bandwidth
	(MHz)	(MHz)
Low	5190	41.00
High	5230	40.50

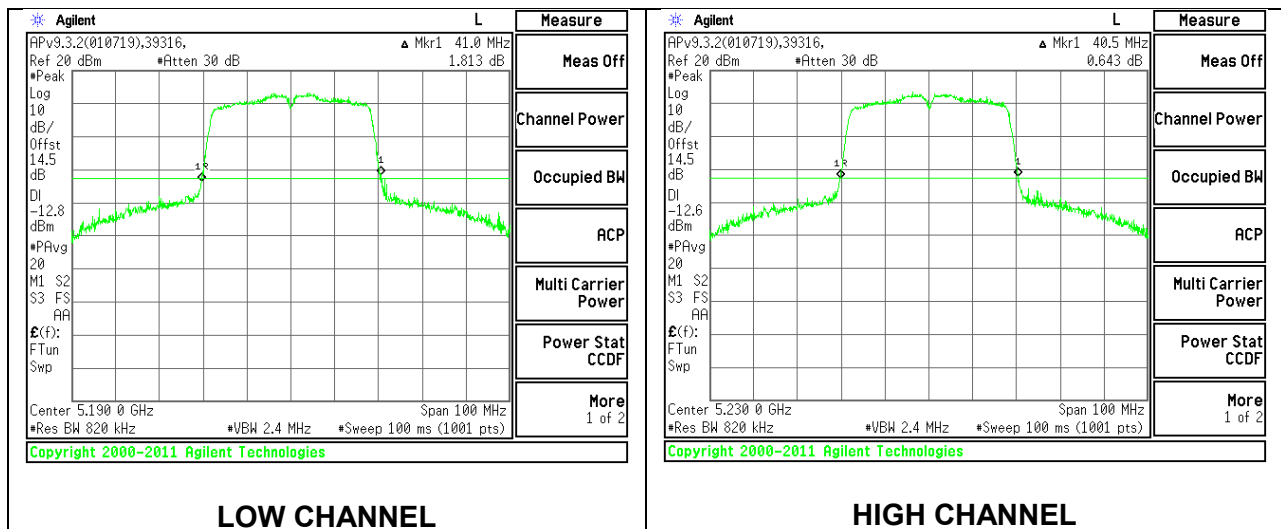


1TX Antenna 5 MODE

Channel	Frequency	26dB Bandwidth
	(MHz)	(MHz)
Low	5190	40.70
High	5230	40.50

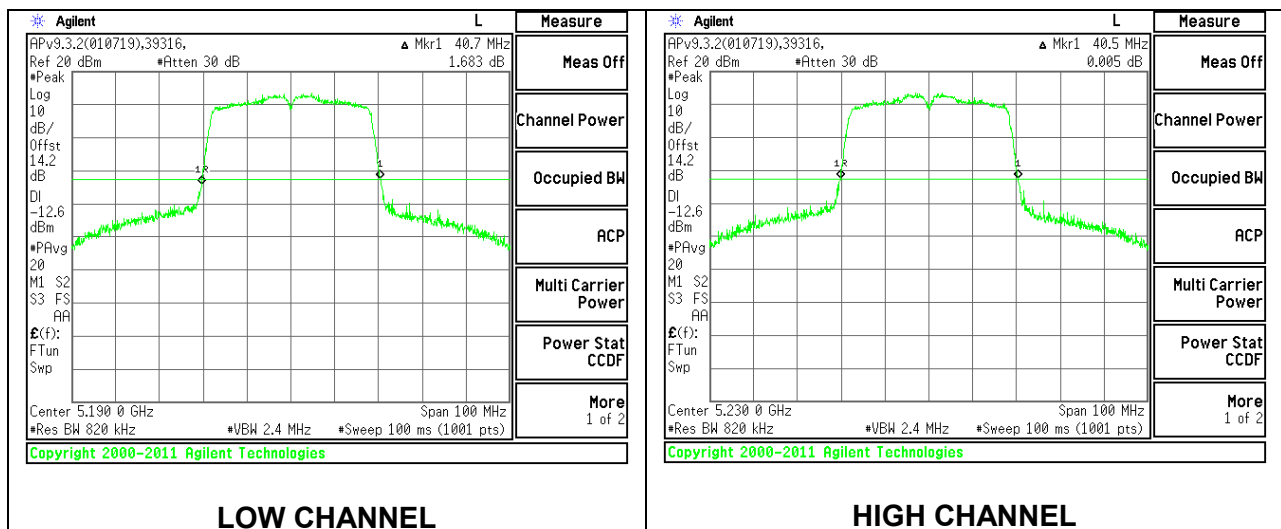

2TX Antenna 4 + Antenna 5 CDD MODE


Channel	Frequency	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5190	40.80	40.20
High	5230	40.60	40.40

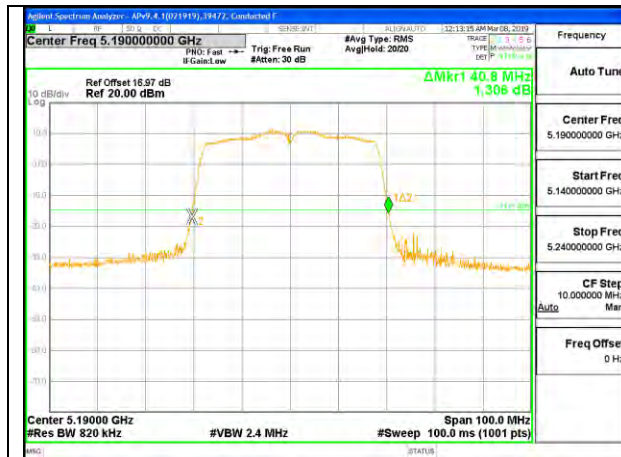**LOW CHANNEL ANT 4****LOW CHANNEL ANT 5****HIGH CHANNEL ANT 4****HIGH CHANNEL ANT 5**

8.2.3. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND


1TX Antenna 4 MODE

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	82.80

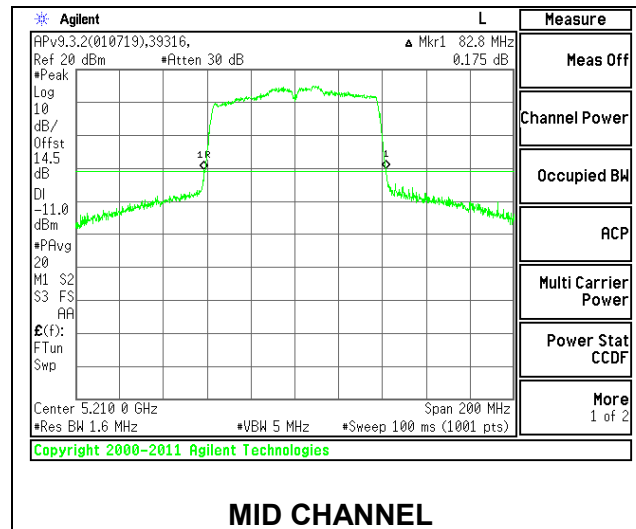



1TX Antenna 5 MODE

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	82.80

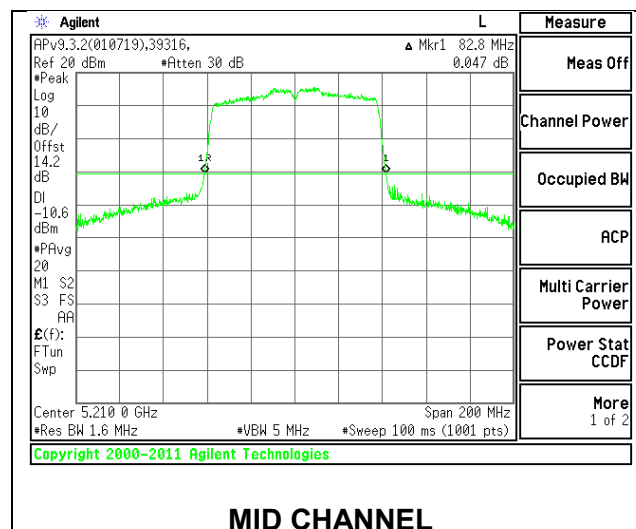

2TX Antenna 4 + Antenna 5 CDD MODE


Channel	Frequency	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Mid	5210	82.80	83.40

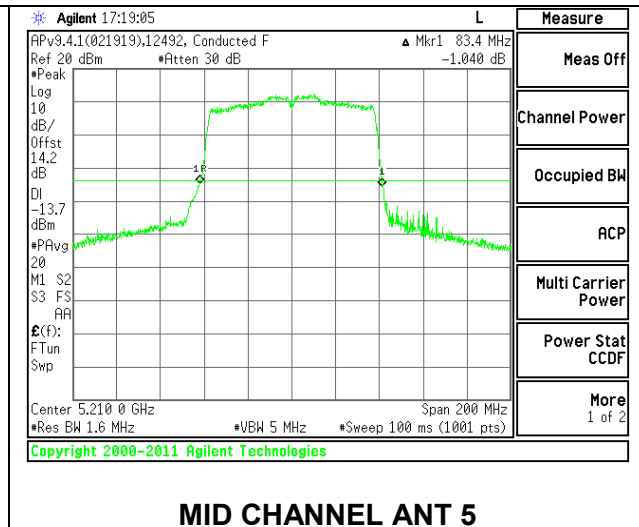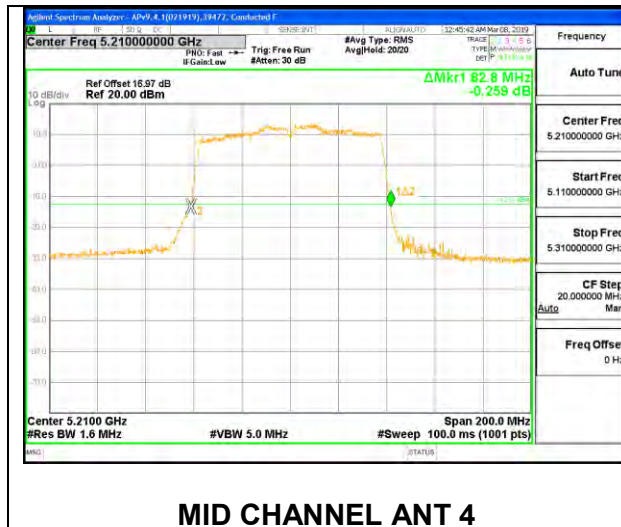

8.2.4. 802.11ax HE20 MODE IN THE 5.2 GHz BAND


1TX Antenna 4 MODE – 242-Tones, RU Index 61

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5180	21.95
Mid	5200	22.25
High	5240	22.10

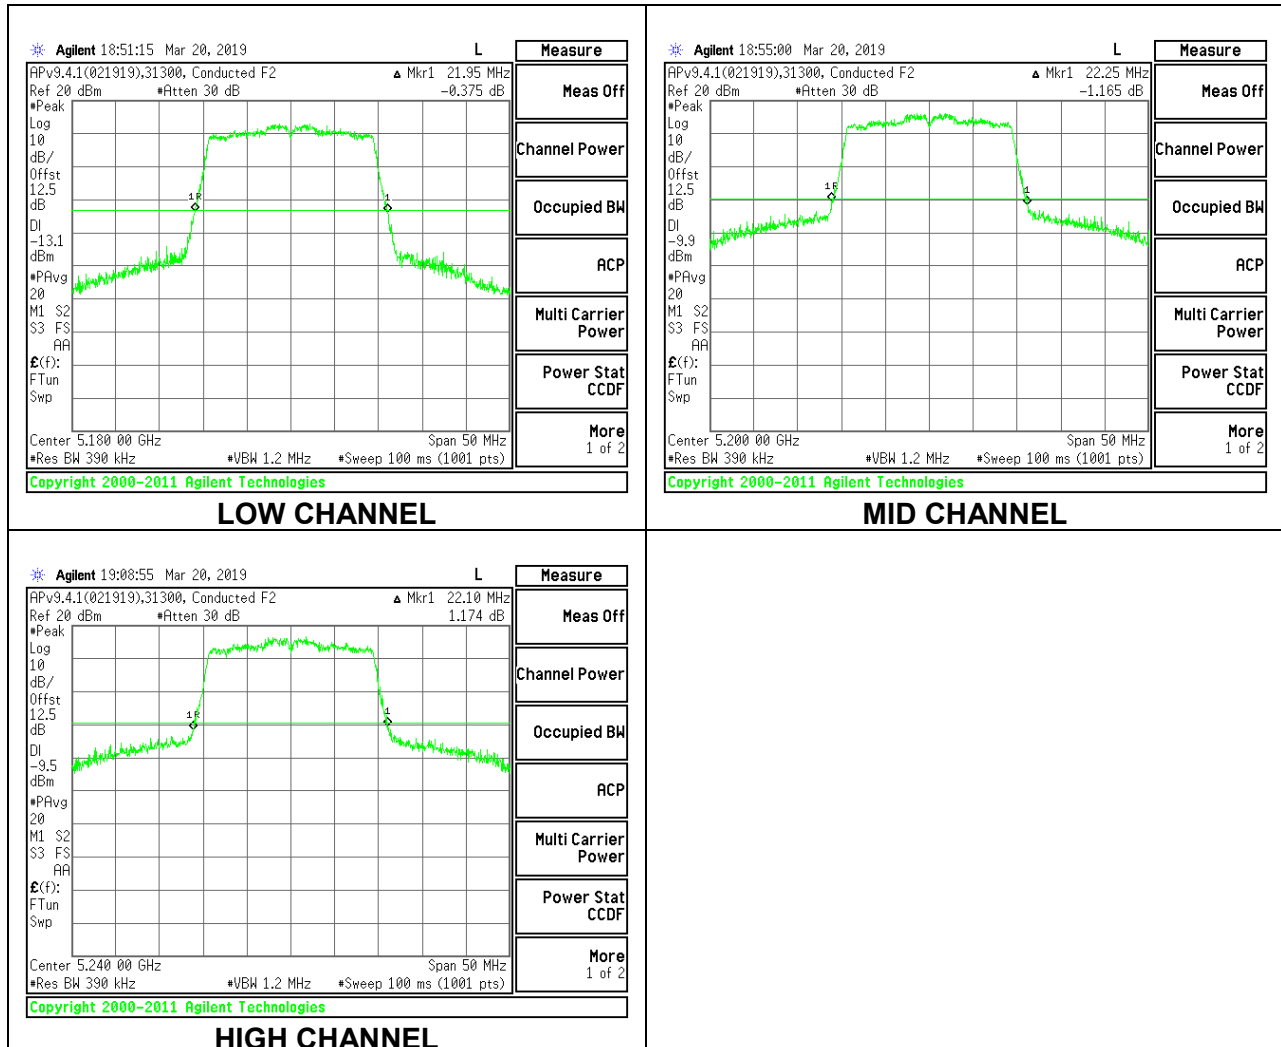


1TX Antenna 4 MODE – 26-Tones, RU Index 0


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	20.95
Mid	5200	20.70
High	5240	20.60

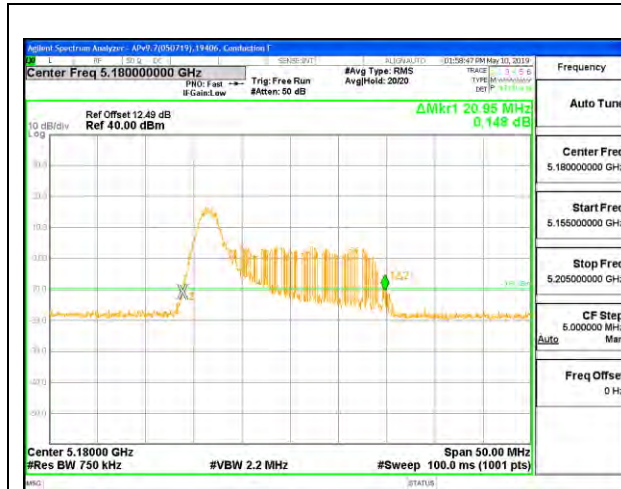

LOW CHANNEL

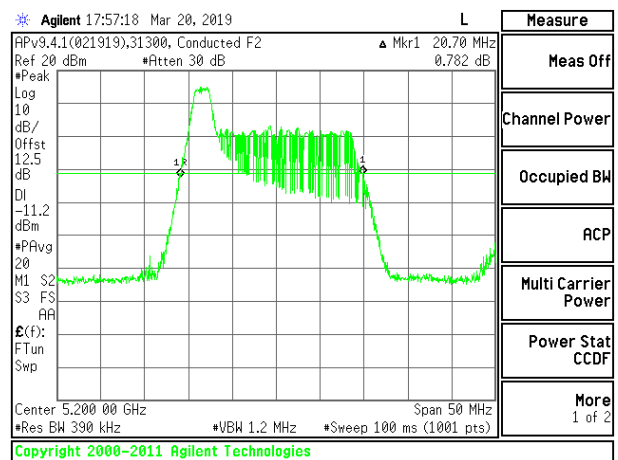


MID CHANNEL

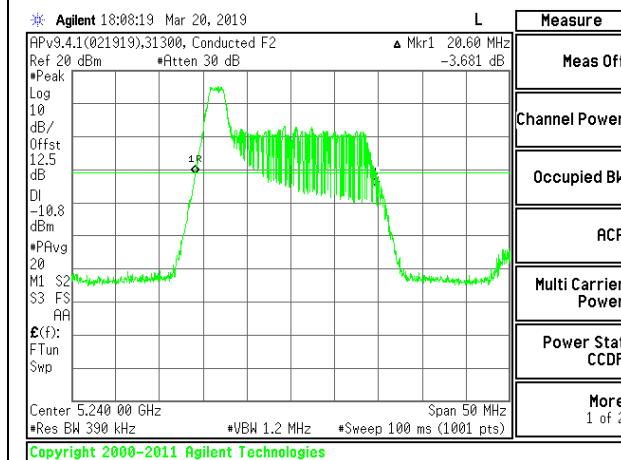

HIGH CHANNEL


1TX Antenna 4 MODE – 26-Tones, RU Index 4

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5180	19.75
Mid	5200	20.05
High	5240	19.85

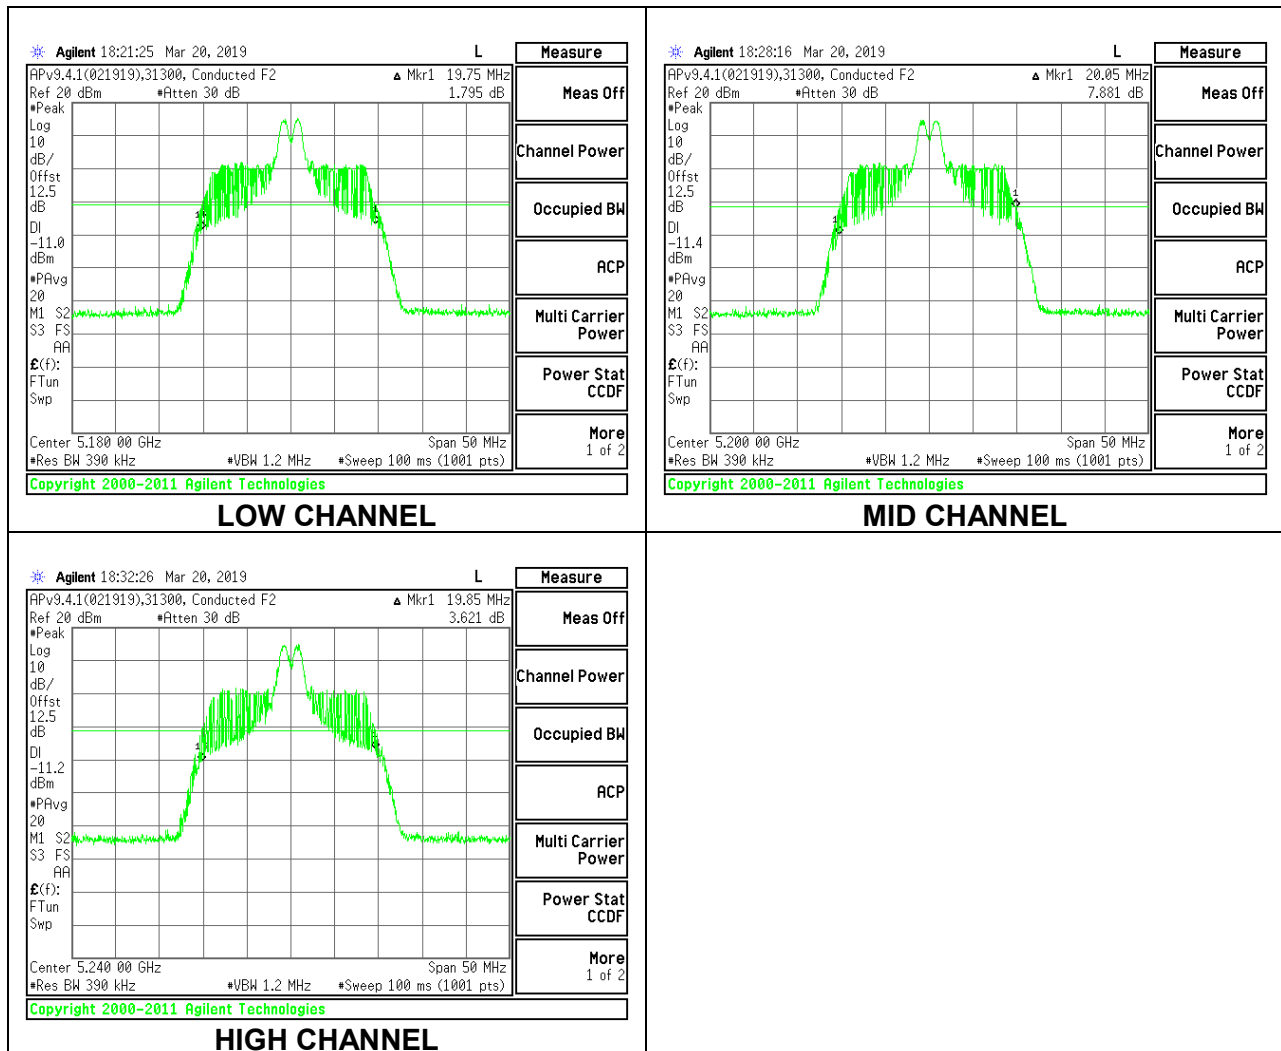


1TX Antenna 4 MODE – 26-Tones, RU Index 8

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5180	21.00
Mid	5200	21.10
High	5240	21.10

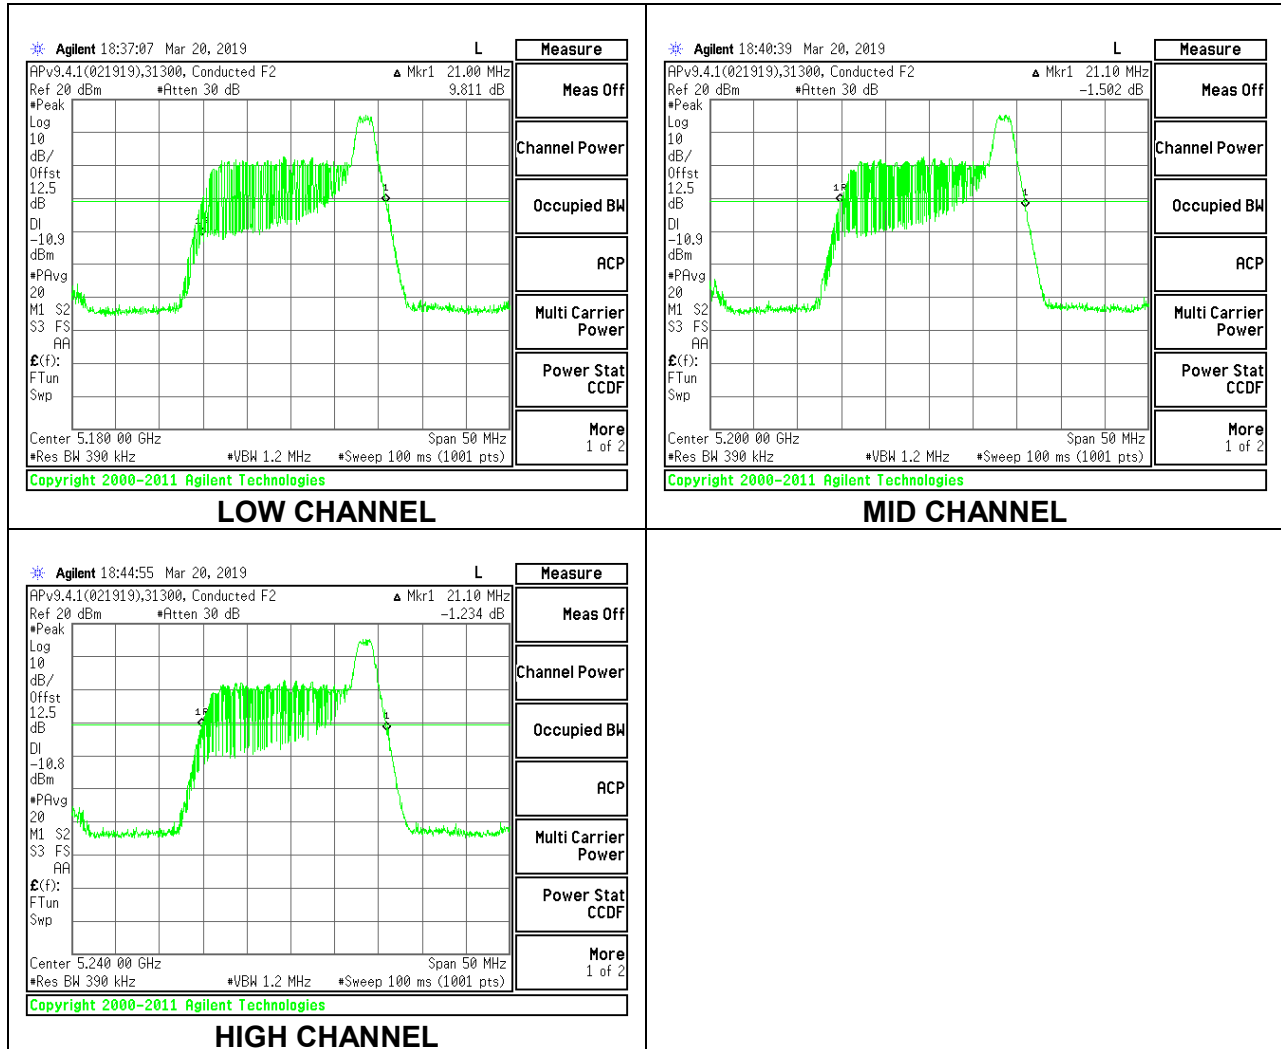


1TX Antenna 5 MODE – 242-Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.15
Mid	5200	23.15
High	5240	22.05

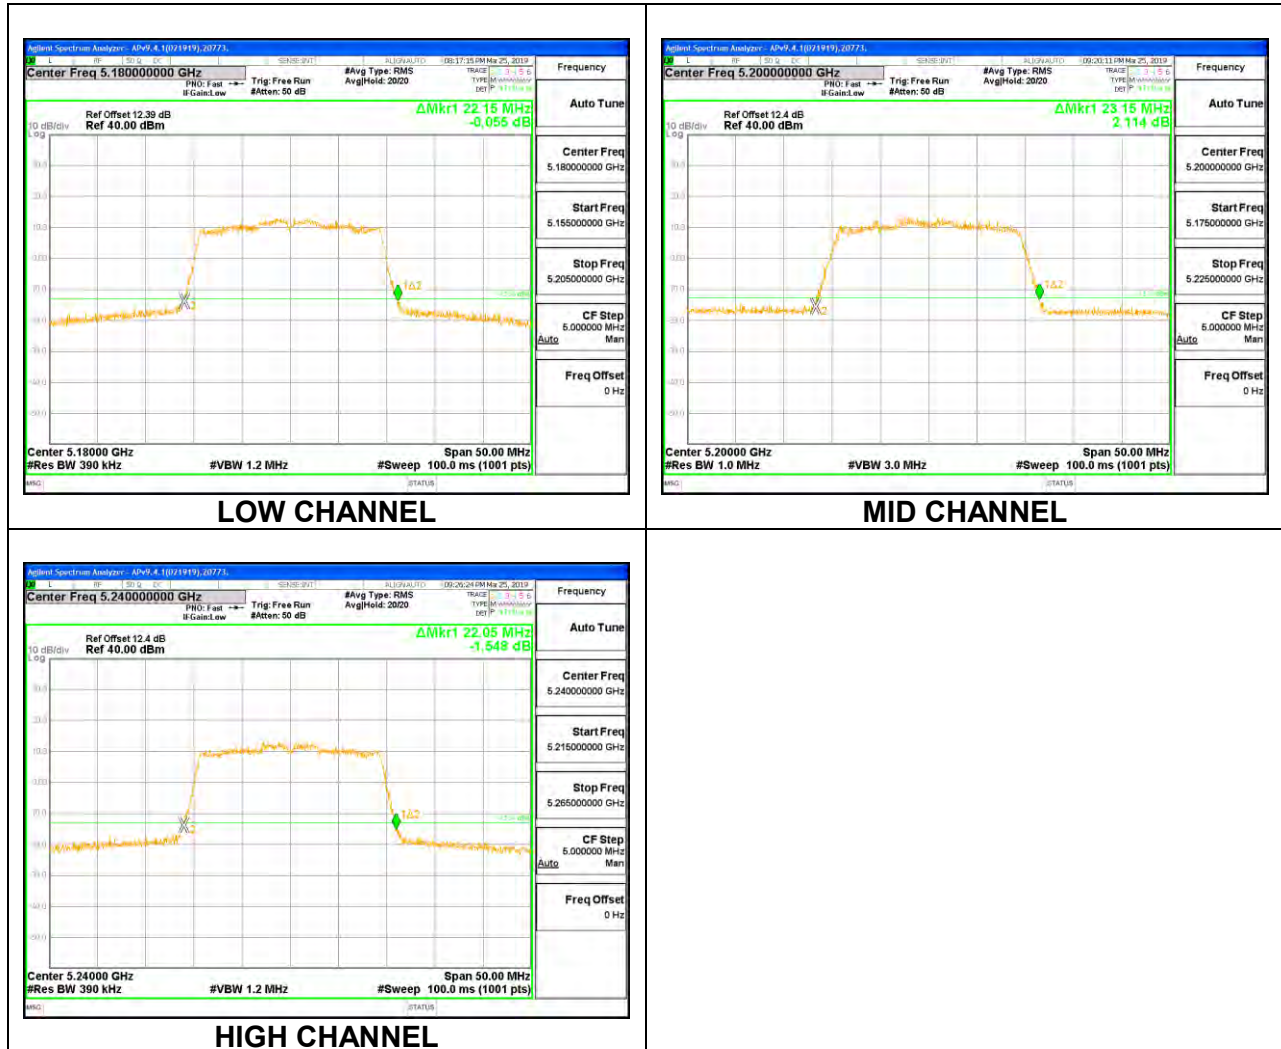


1TX Antenna 5 MODE – 26-Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	20.55
Mid	5200	20.80
High	5240	20.55

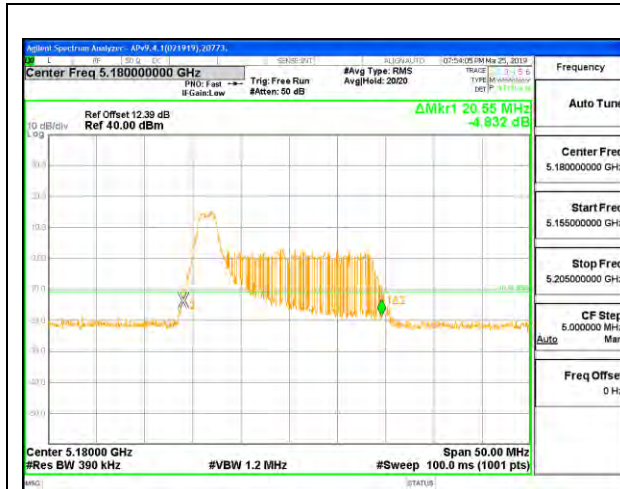**LOW CHANNEL****MID CHANNEL****HIGH CHANNEL**


1TX Antenna 5 MODE – 26-Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.65
Mid	5200	19.70
High	5240	20.05

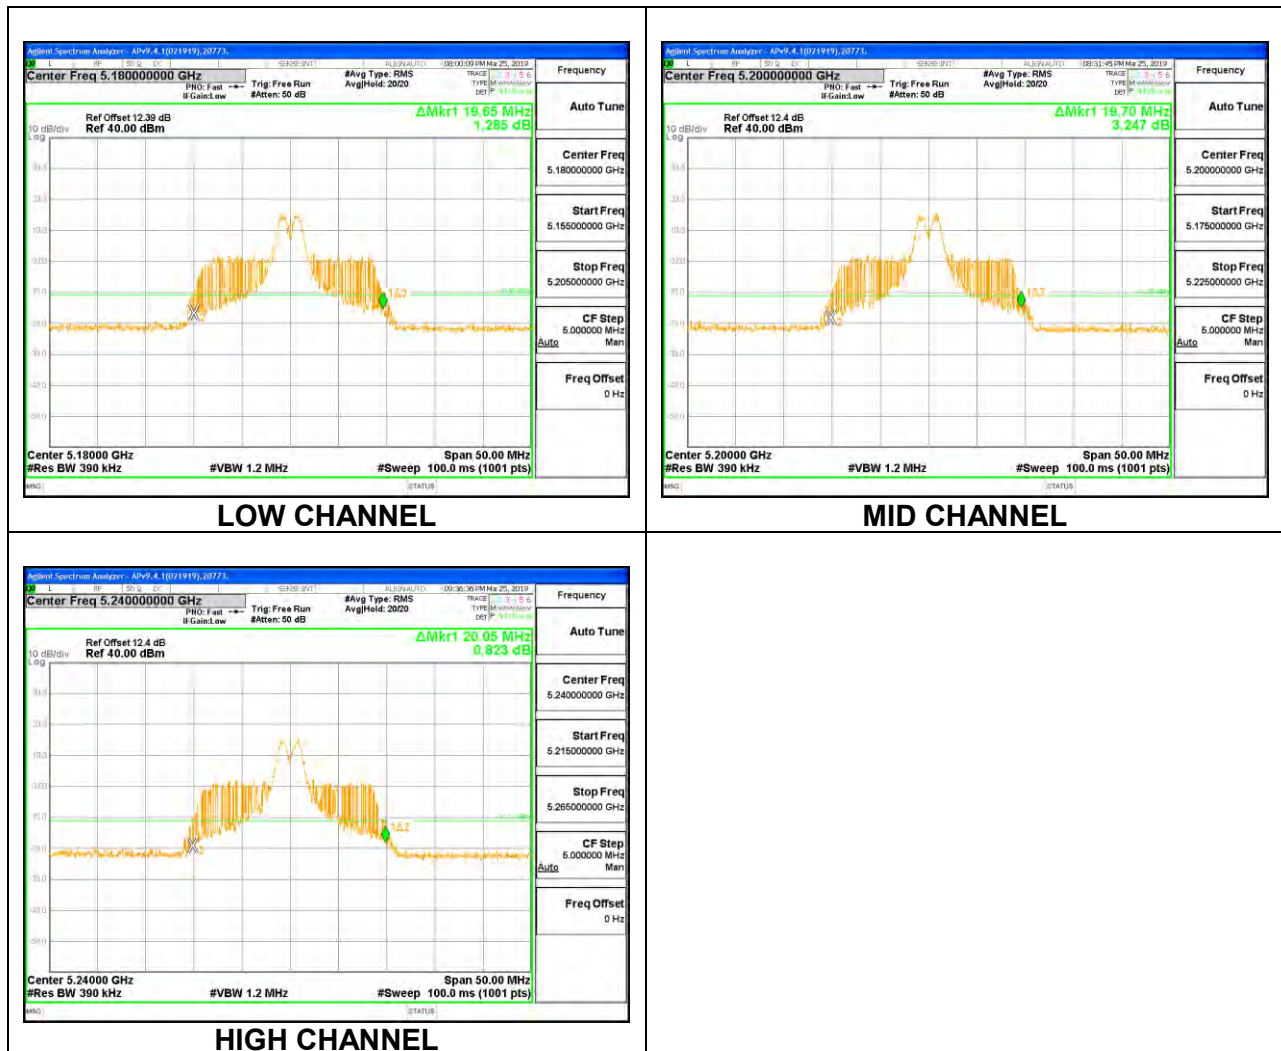





1TX Antenna 5 MODE – 26-Tones, RU Index 8



Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5180	21.10
Mid	5200	21.15
High	5240	21.20

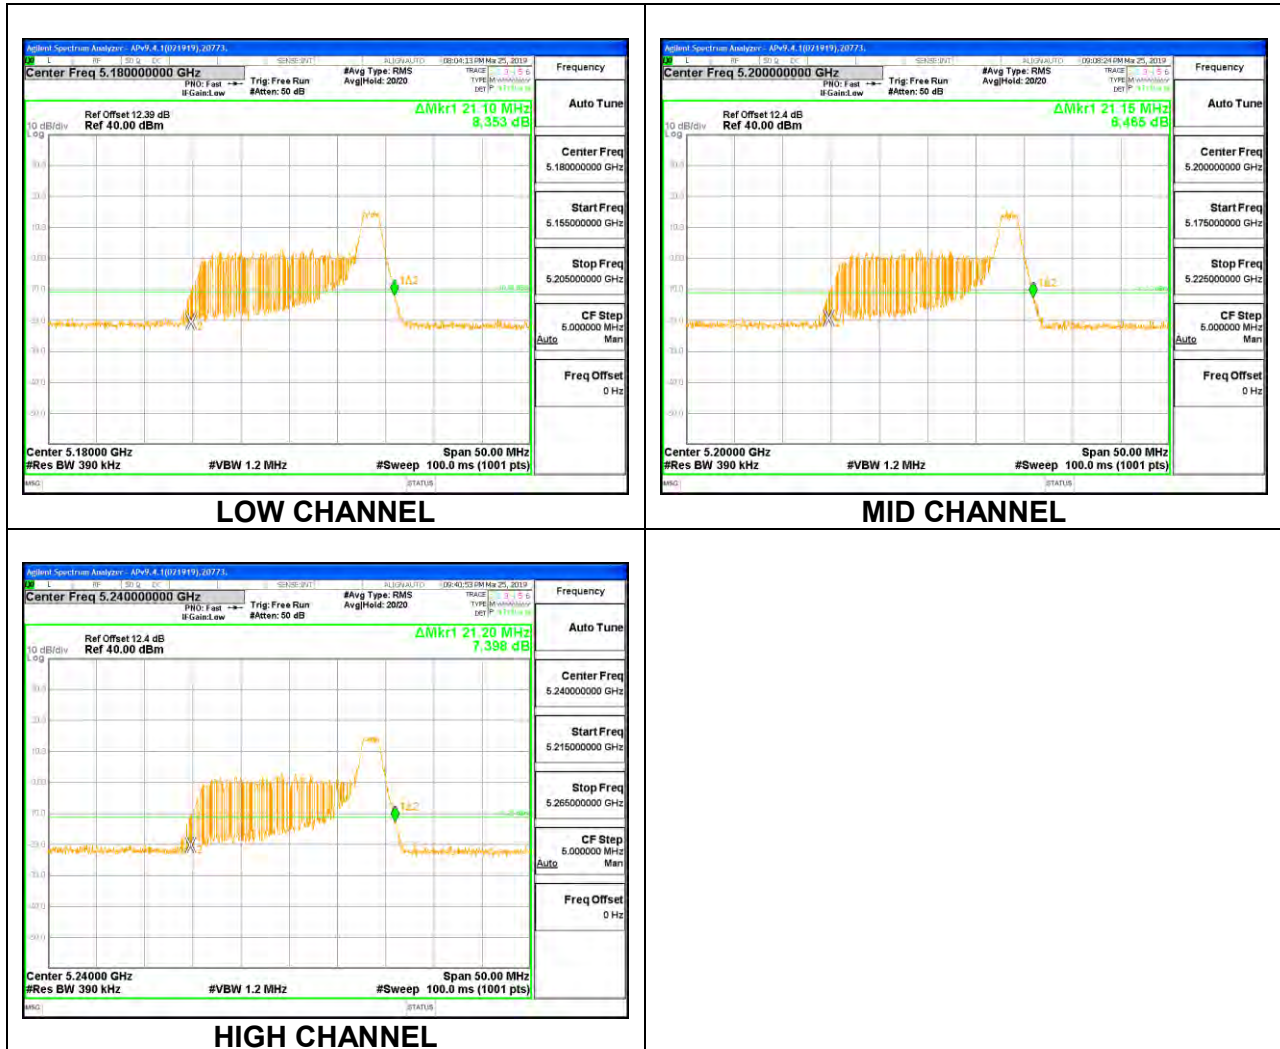

2TX Antenna 4 + Antenna 5 OFDMA MODE – 242 Tones, RU Index 61





Channel	Frequency (MHz)	26 dB Bandwidth	
		Ant 4 (MHz)	Ant 5 (MHz)
Low	5180	22.25	21.95
Mid	5200	22.20	21.80
High	5240	22.30	22.10

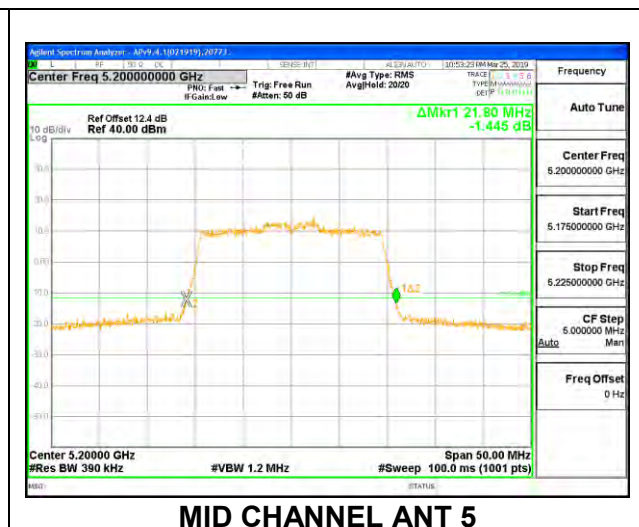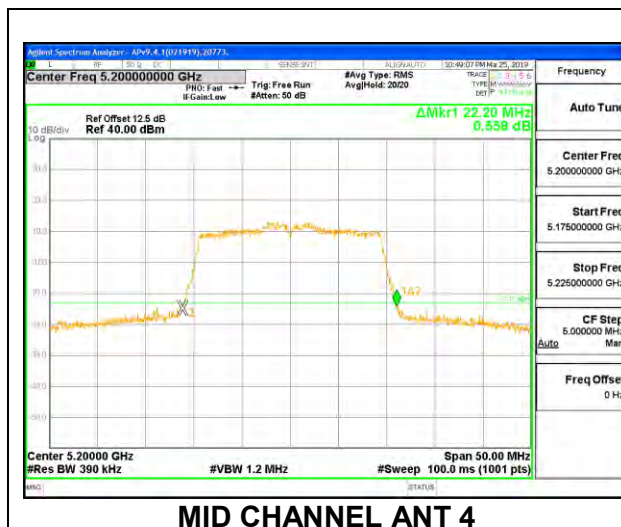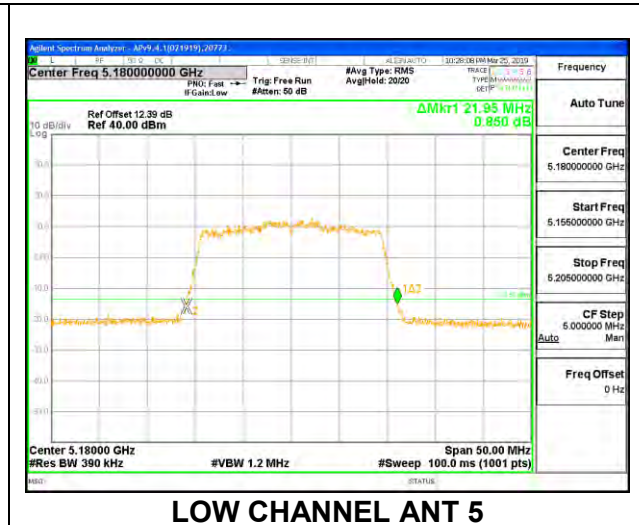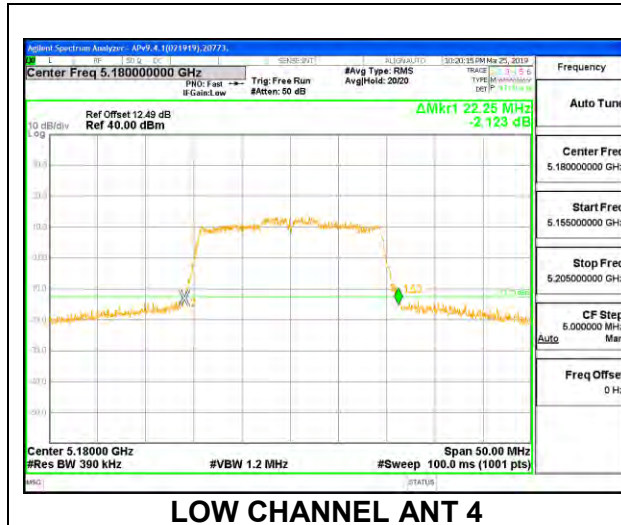


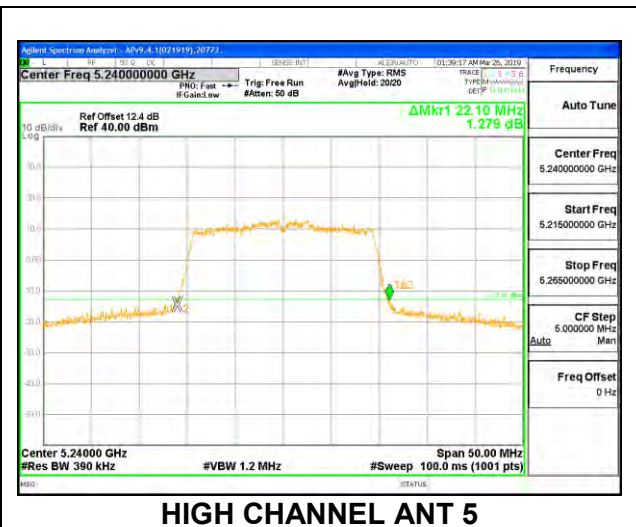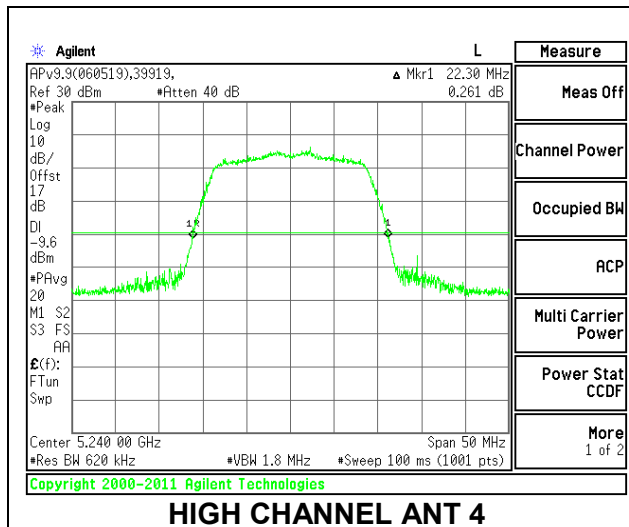

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 0





Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
	(MHz)	Ant 4	Ant 5
		(MHz)	(MHz)
Low	5180	20.55	20.30
Mid	5200	20.60	20.35
High	5240	20.65	20.00

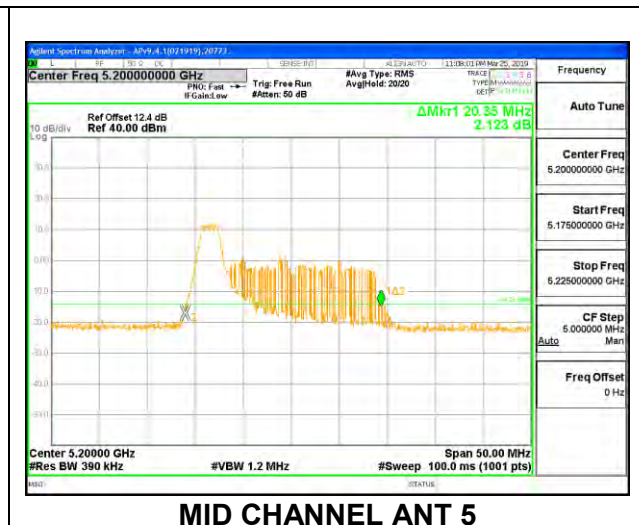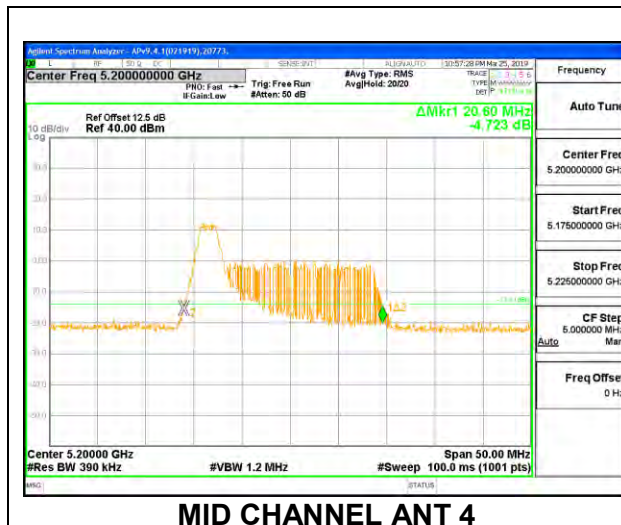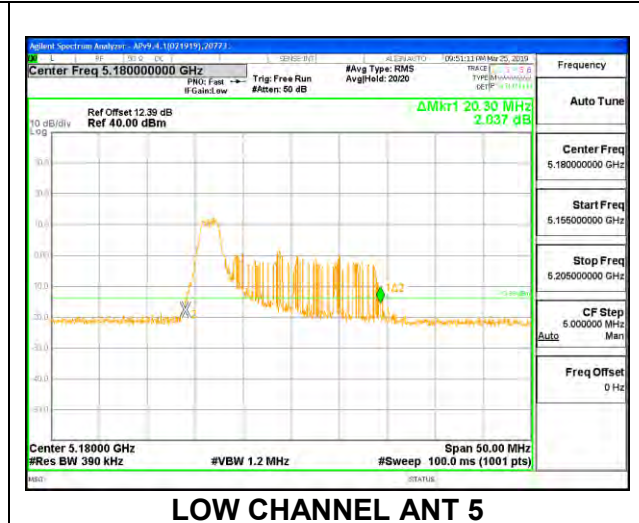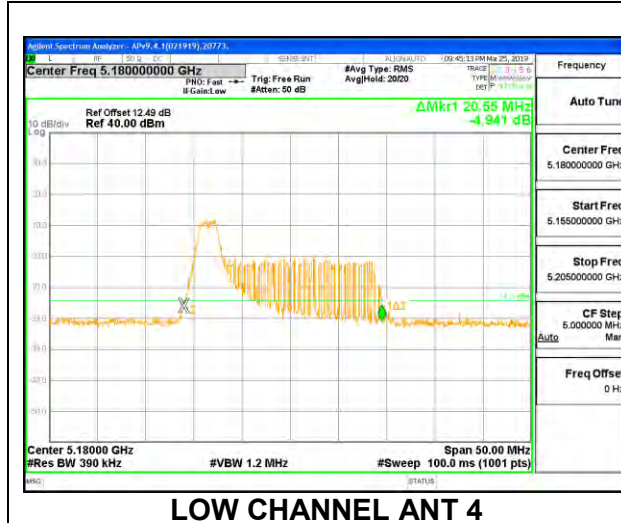


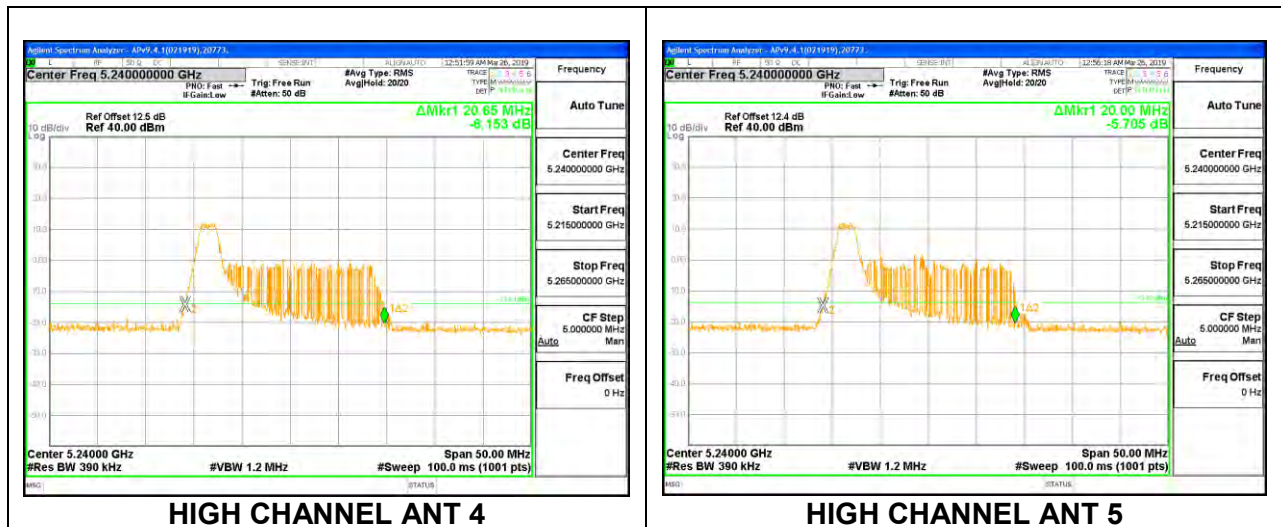

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 4





Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
	(MHz)	Ant 4 (MHz)	Ant 5 (MHz)
Low	5180	19.75	18.70
Mid	5200	20.25	18.55
High	5240	19.85	18.50

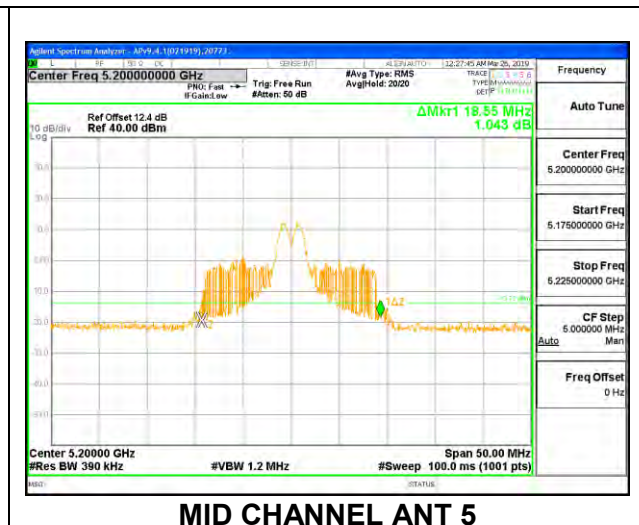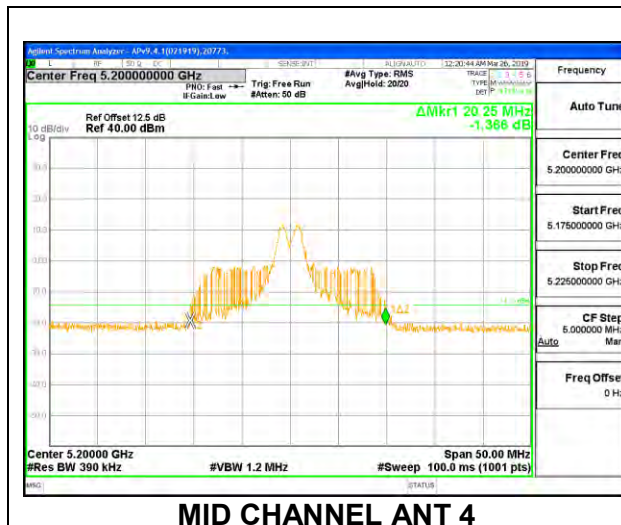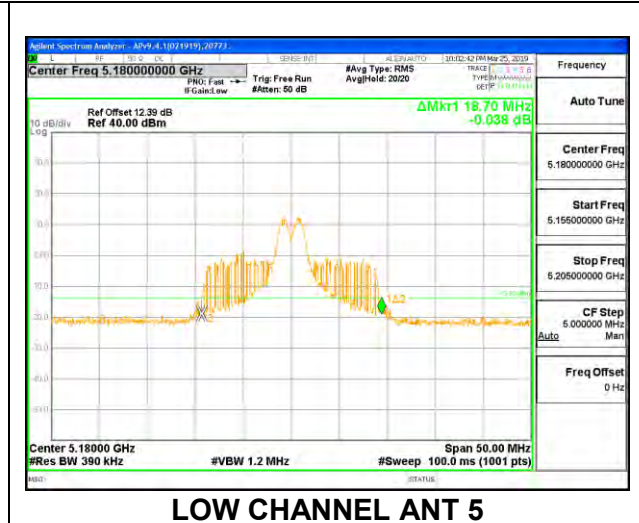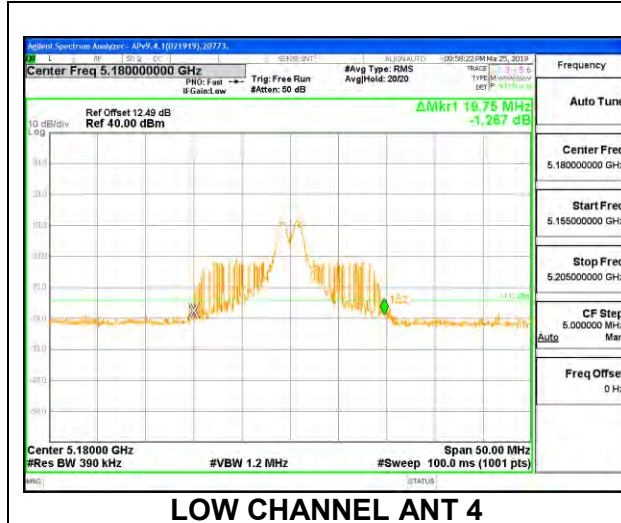


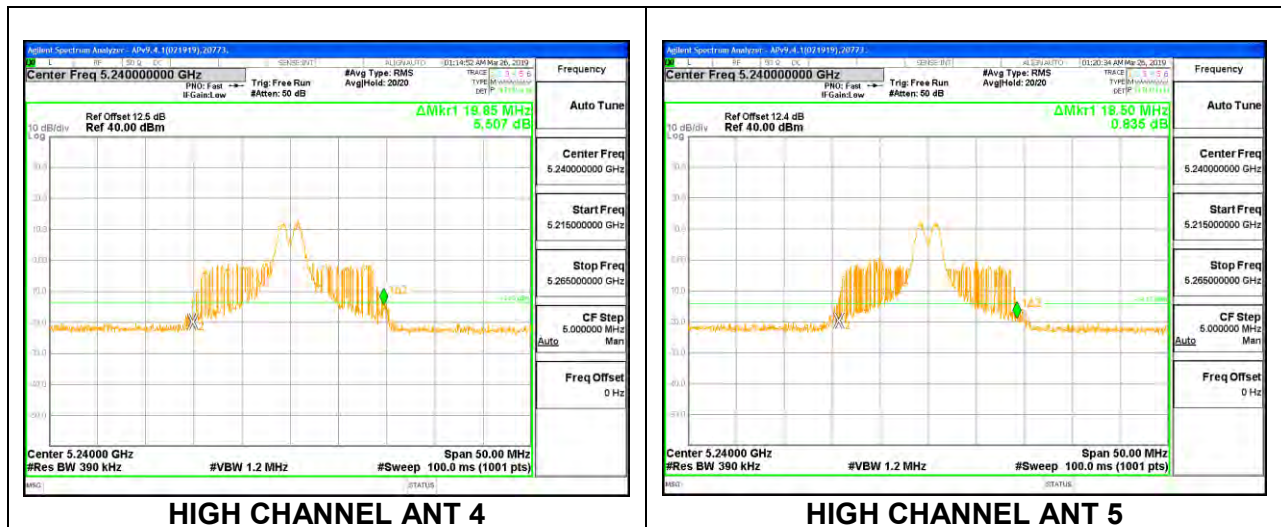

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 8

Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
	(MHz)	Ant 4	Ant 5
		(MHz)	(MHz)
Low	5180	21.40	20.20
Mid	5200	21.05	20.40
High	5240	20.90	20.00

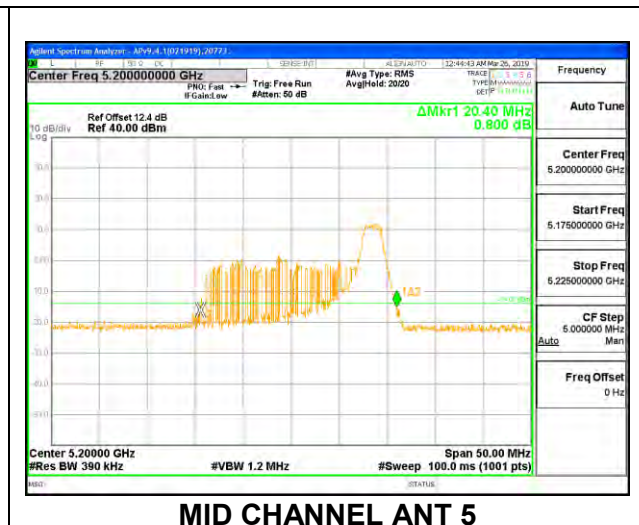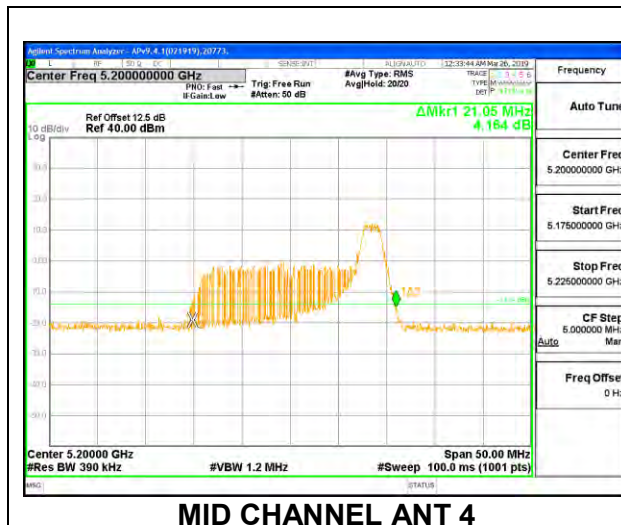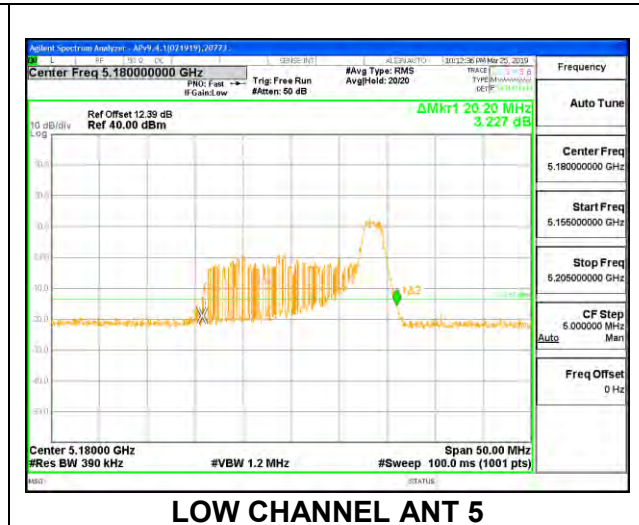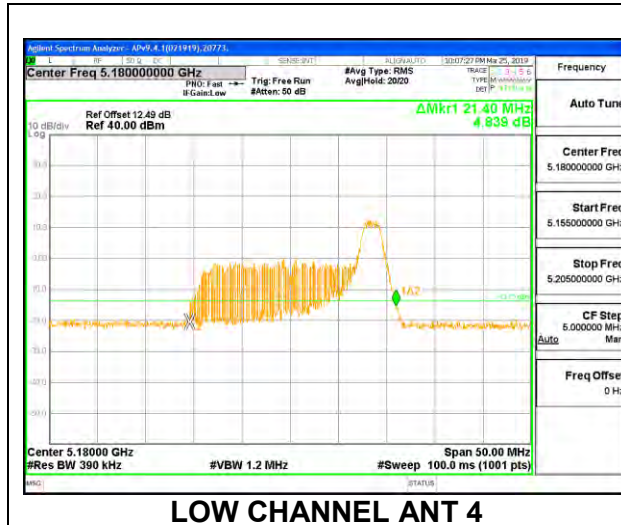


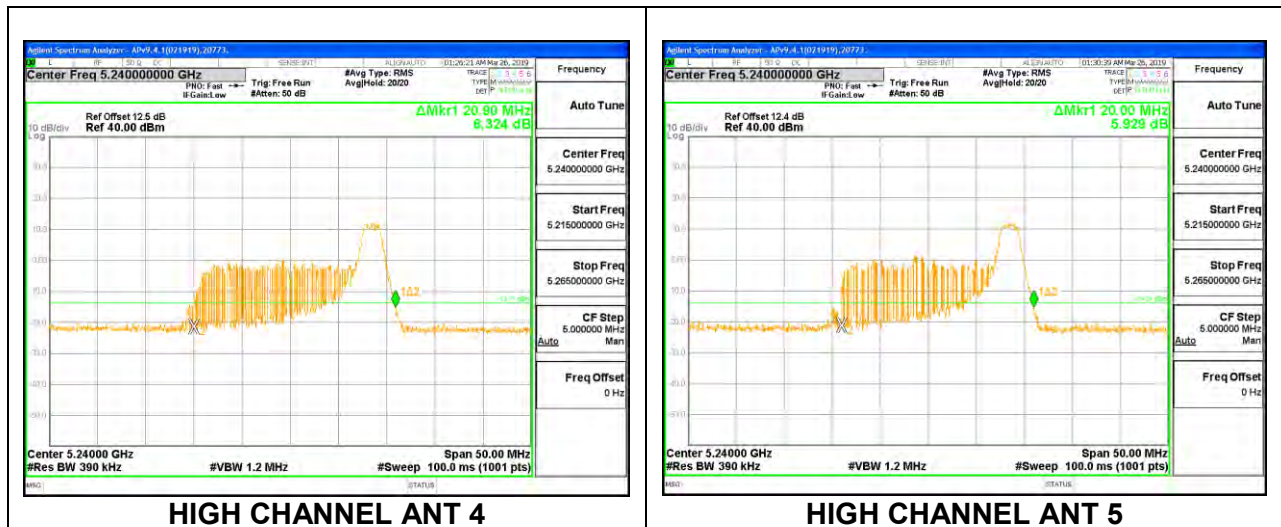

8.2.5. 802.11ax HE40 MODE IN THE 5.2 GHz BAND


1TX Antenna 4 MODE – 484 Tones, RU Index 65

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5190	41.30
High	5230	41.30

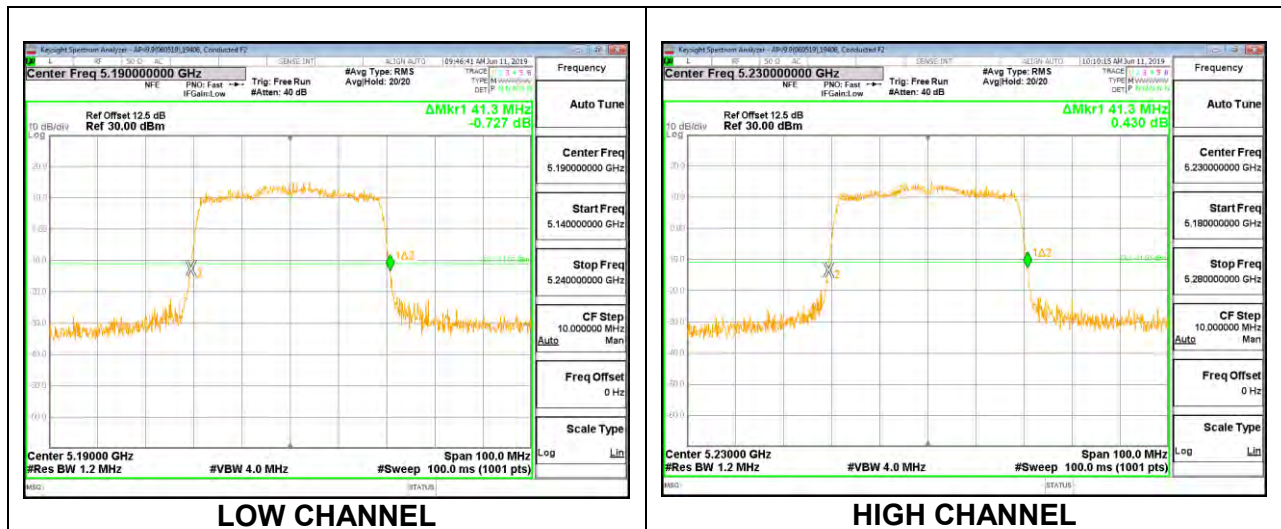


1TX Antenna 4 MODE – 26 Tones, RU Index 0

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5190	22.30
High	5230	22.20

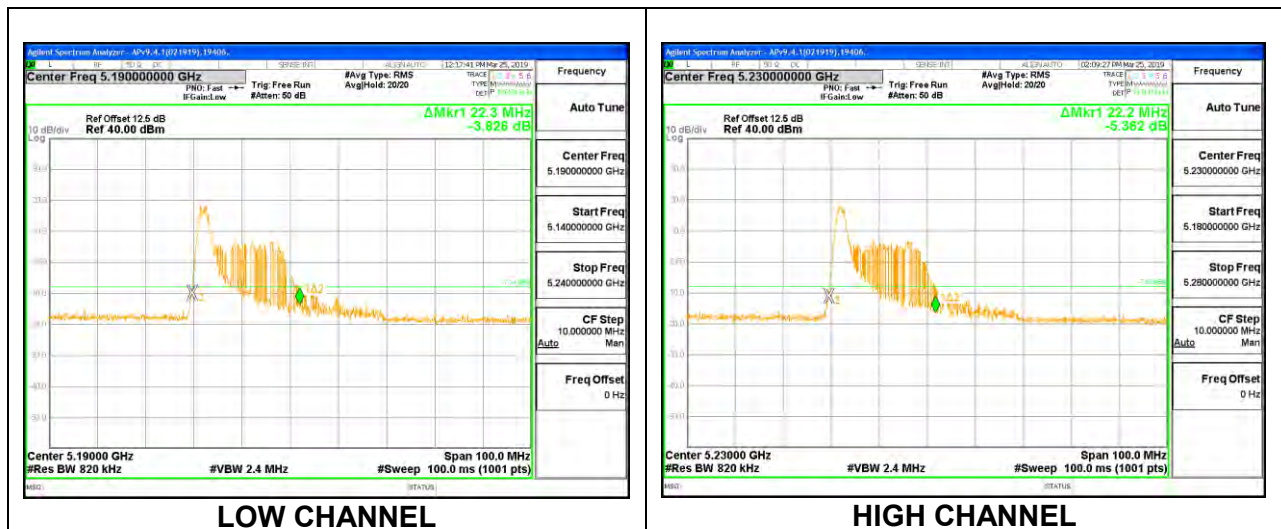


1TX Antenna 4 MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5190	26.00
High	5230	25.30

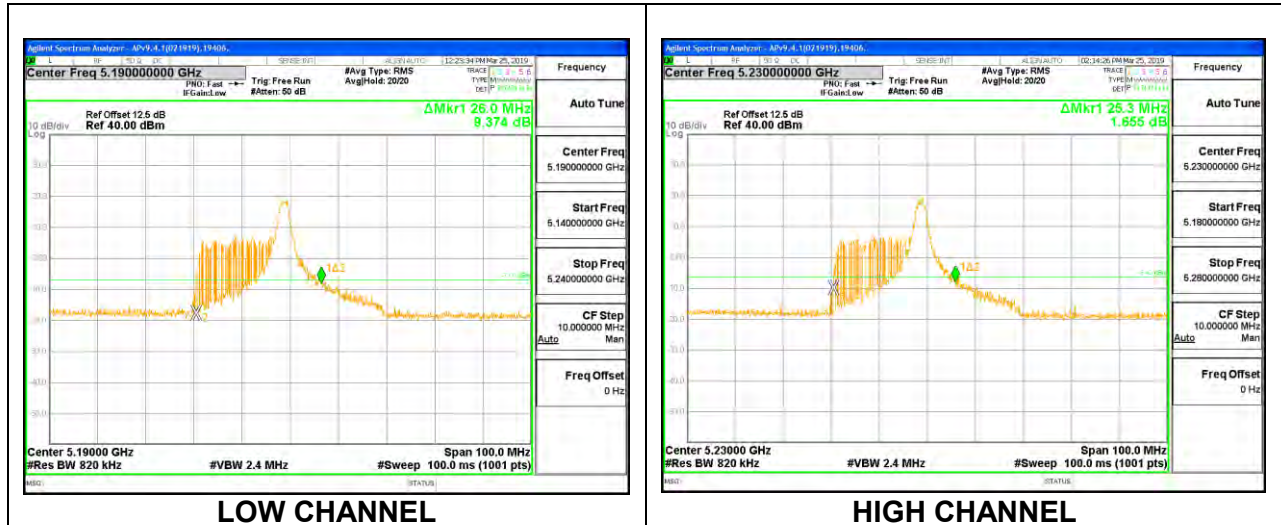
**1TX Antenna 4 MODE – 26 Tones, RU Index 17**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5290	22.00
High	5230	22.00

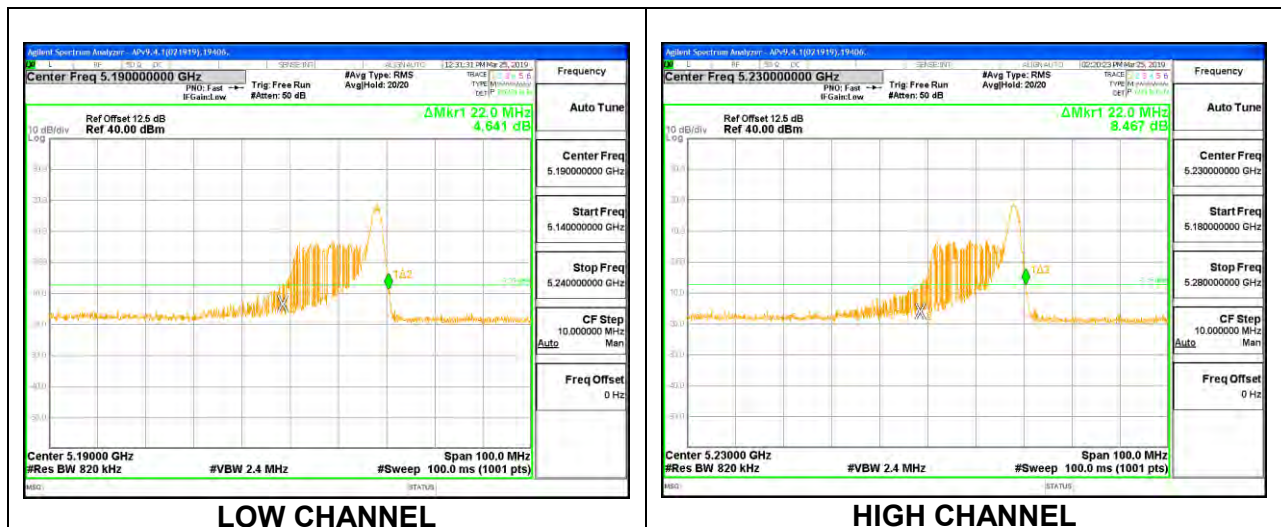


1TX Antenna 5 MODE – 484 Tones, RU Index 65

Channel	Frequency	26dB Bandwidth
	(MHz)	(MHz)
Low	5190	41.20
High	5230	41.20

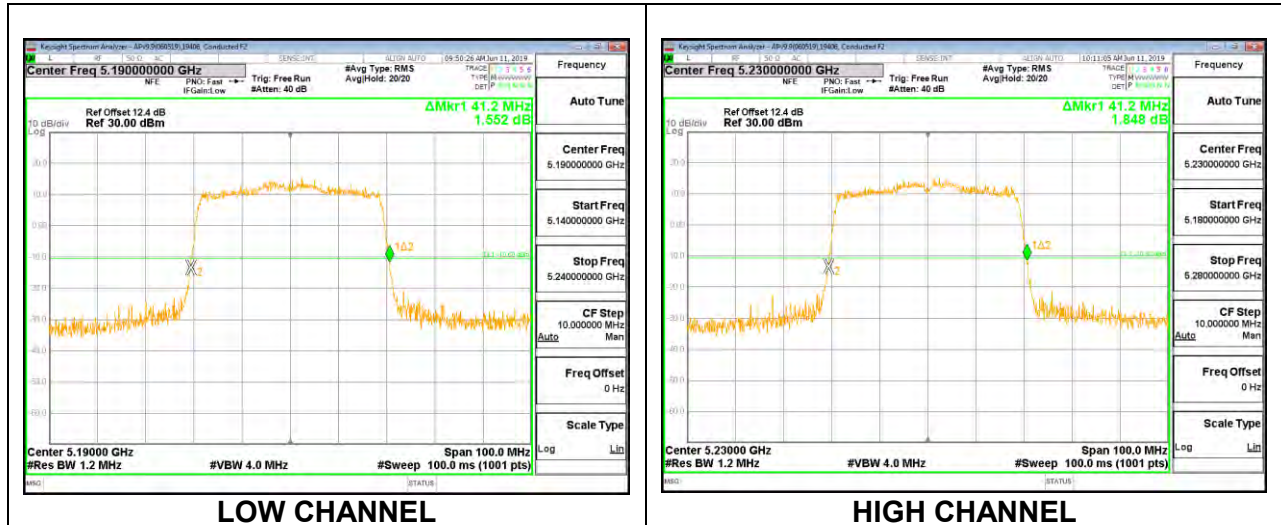
**1TX Antenna 5 MODE – 26 Tones, RU Index 0**

Channel	Frequency	26dB Bandwidth
	(MHz)	(MHz)
Low	5190	21.50
High	5230	21.70

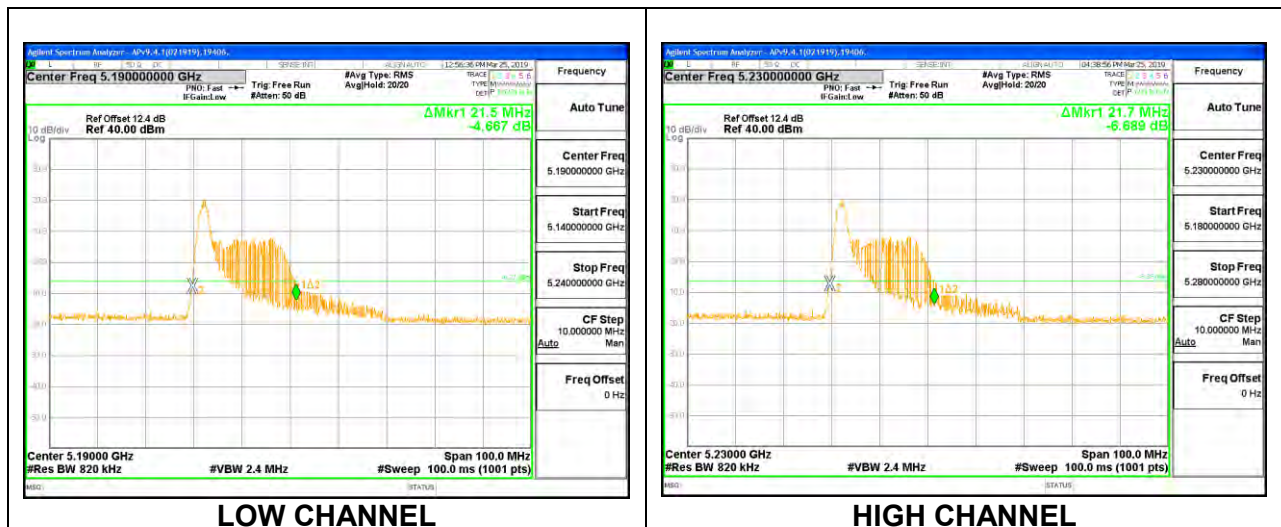


1TX Antenna 5 MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5190	25.00
High	5230	25.20




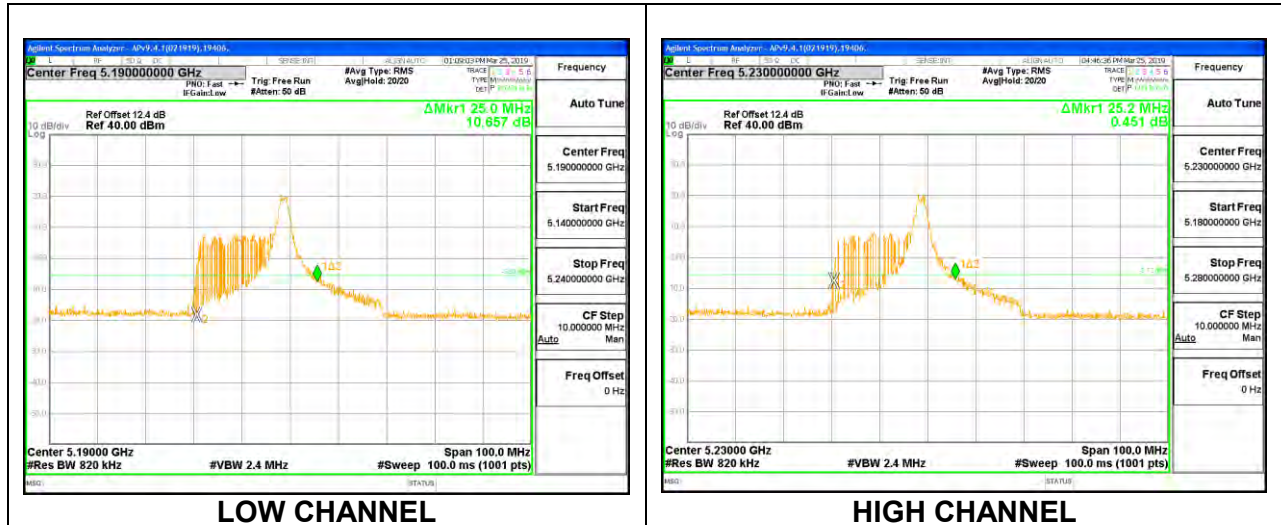
**1TX Antenna 5 MODE – 26 Tones, RU Index 17**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5190	22.10
High	5230	22.50

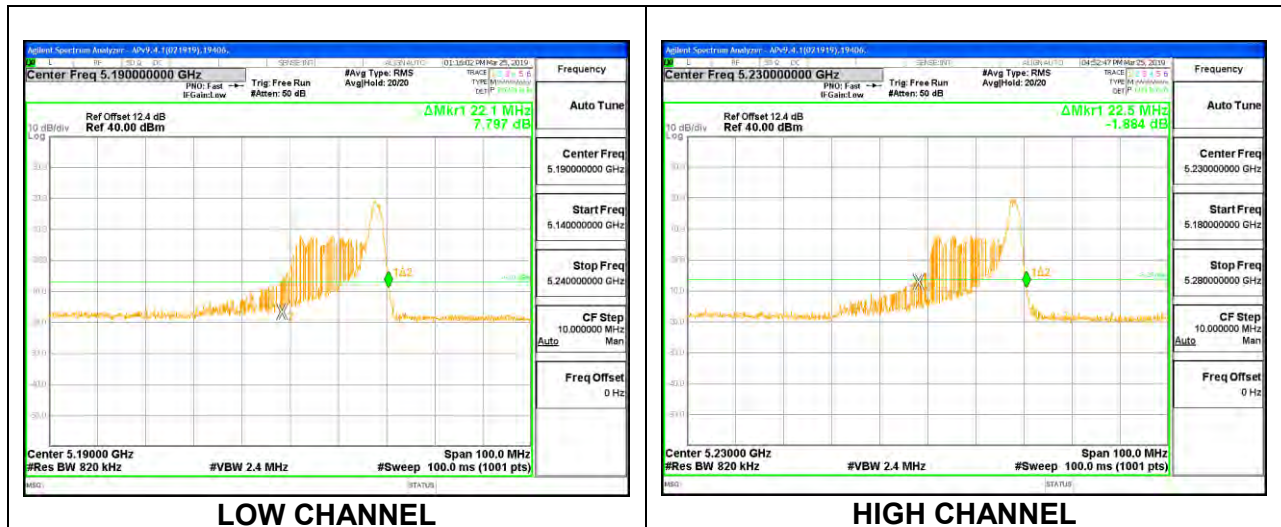





2TX Antenna 4 + Antenna 5 OFDMA MODE – 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5190	41.00	41.00
High	5230	41.30	41.10

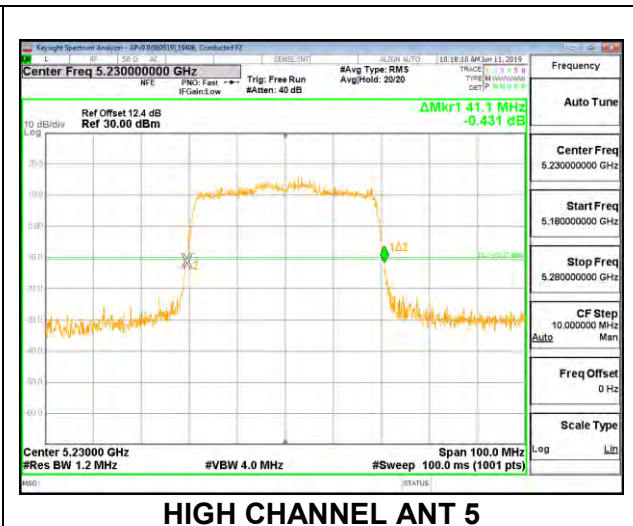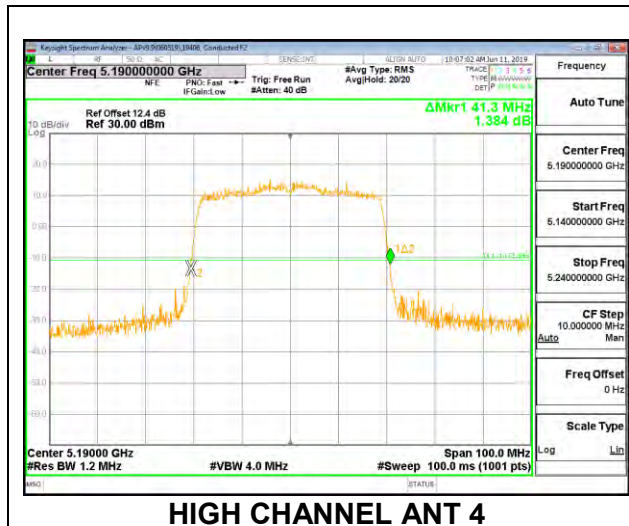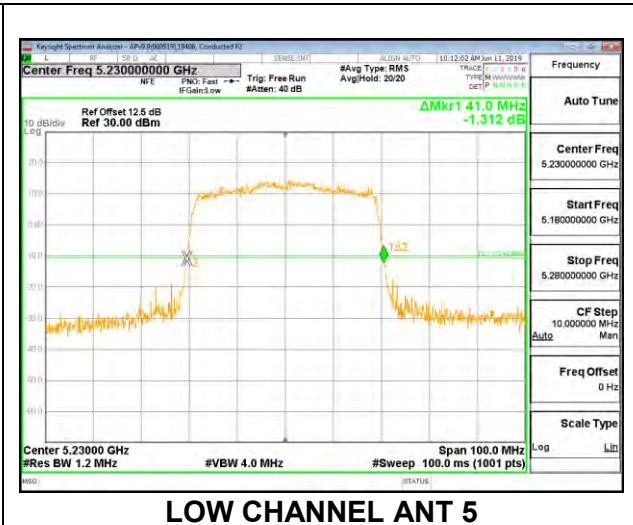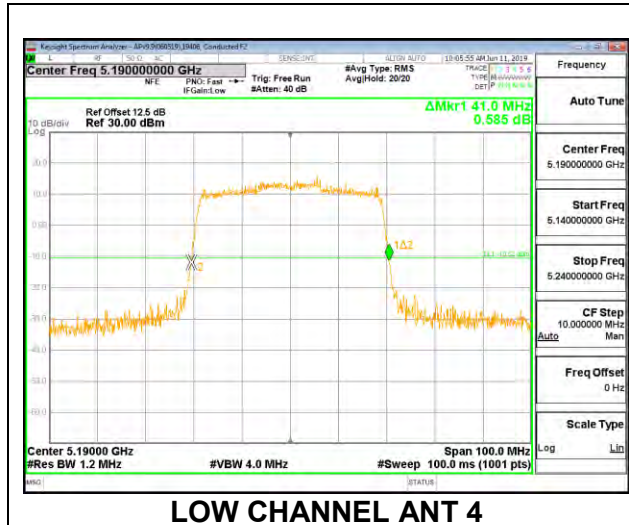





2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5190	21.50	22.10
High	5230	21.60	20.30

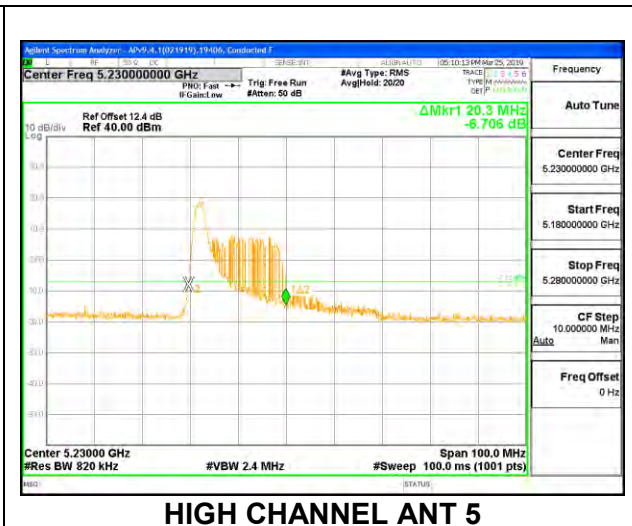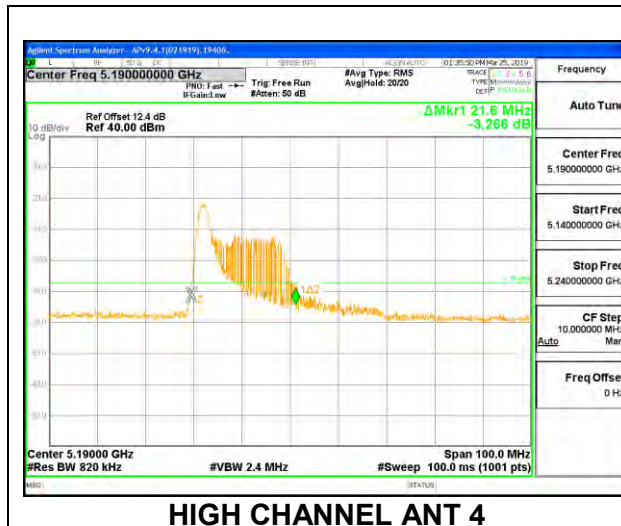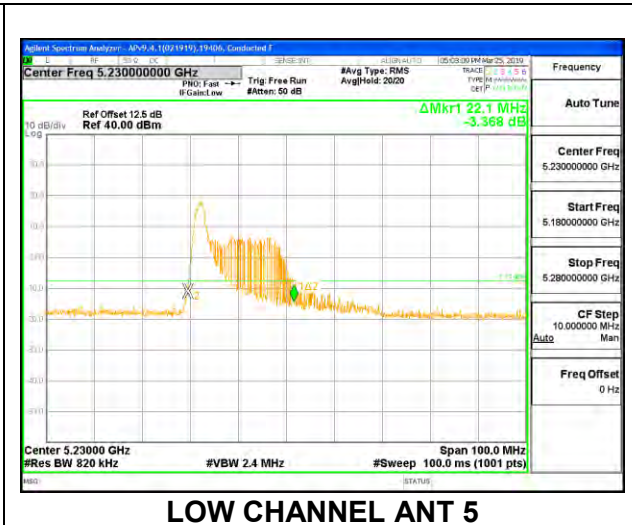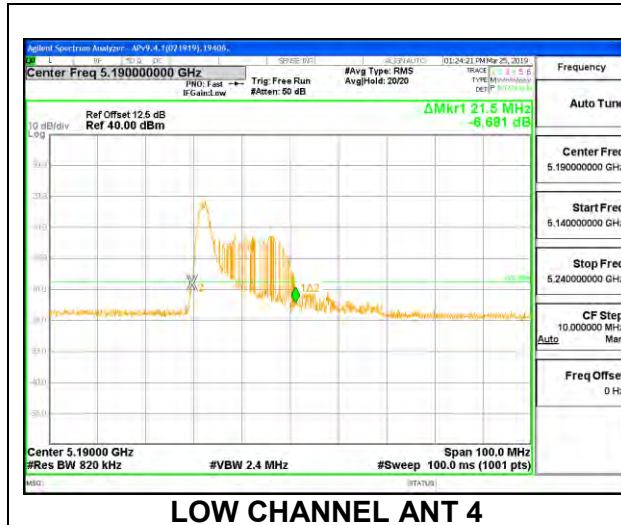





2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5190	25.40	25.40
High	5230	25.92	25.30

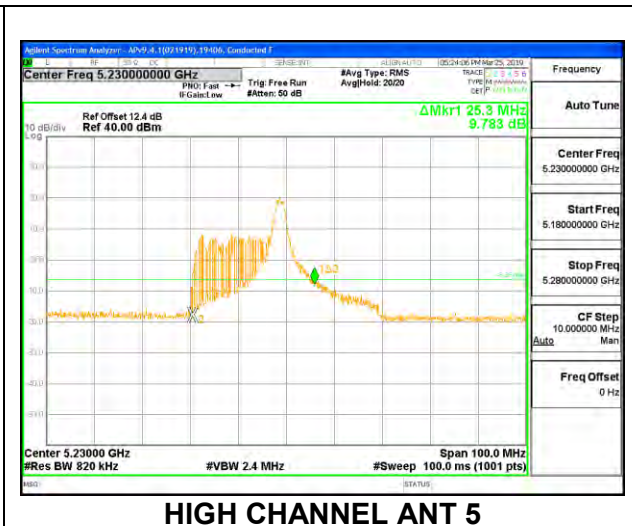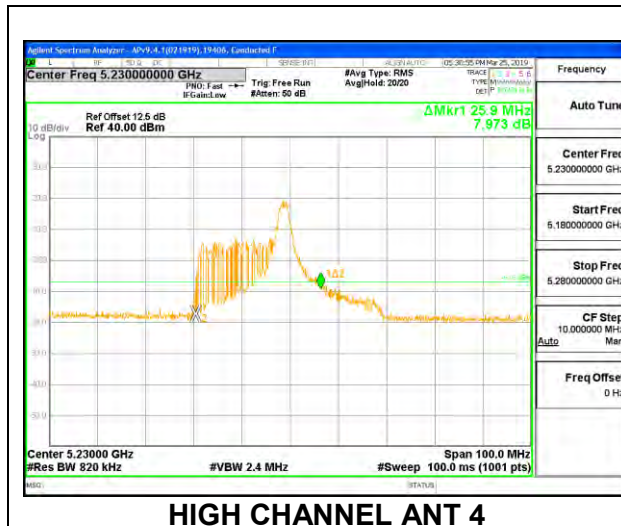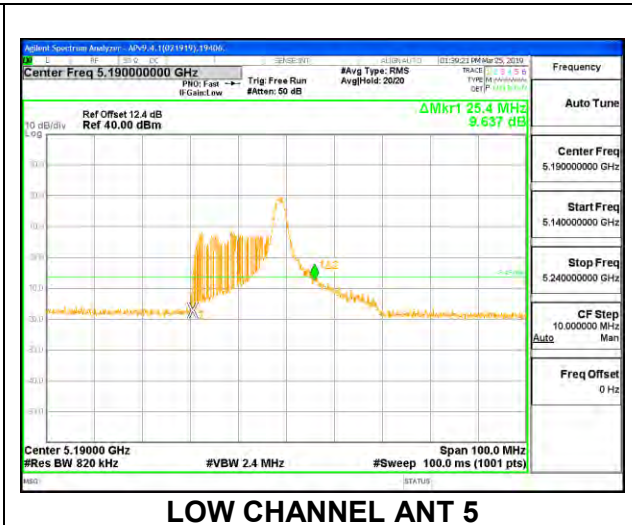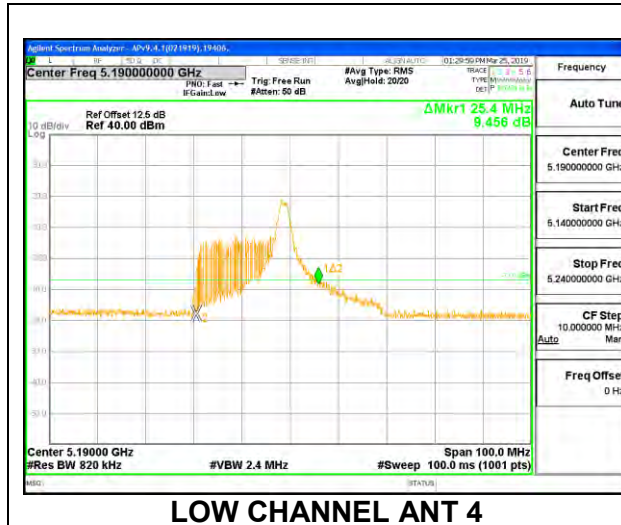

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 17


Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5190	22.00	19.70
High	5230	22.50	20.50

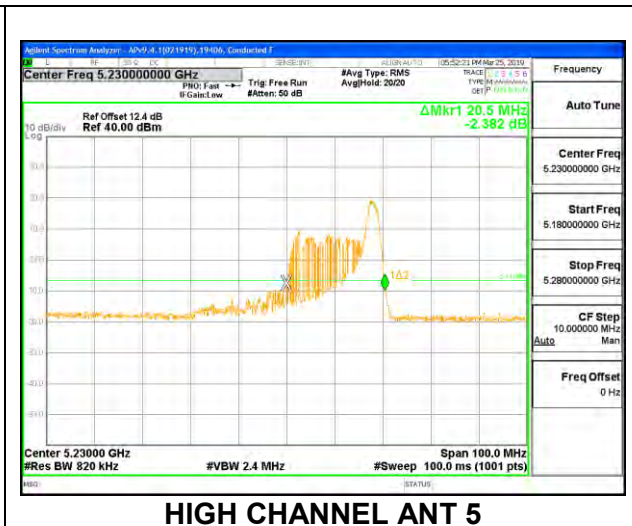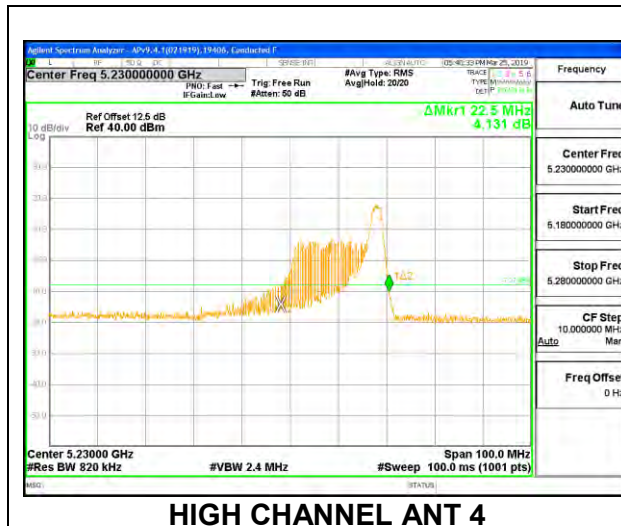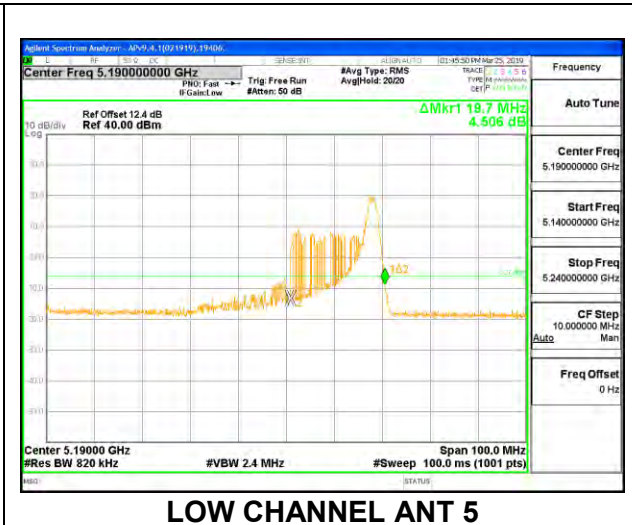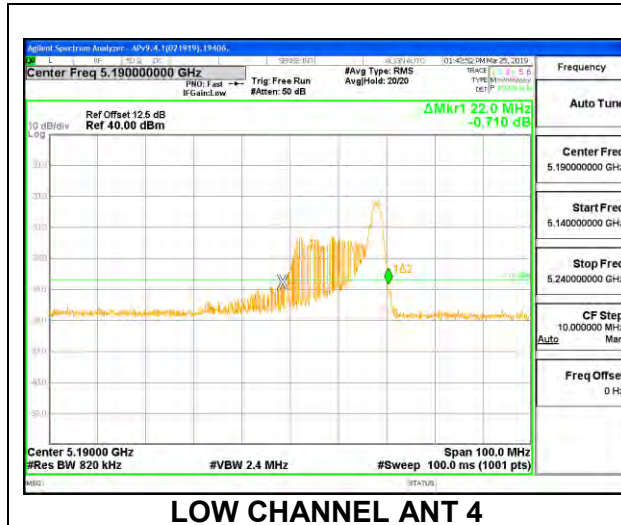

8.2.6. 802.11ax HE80 MODE IN THE 5.2 GHz BAND


1TX Antenna 4 MODE – 996 Tones, RU Index 67

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	83.00

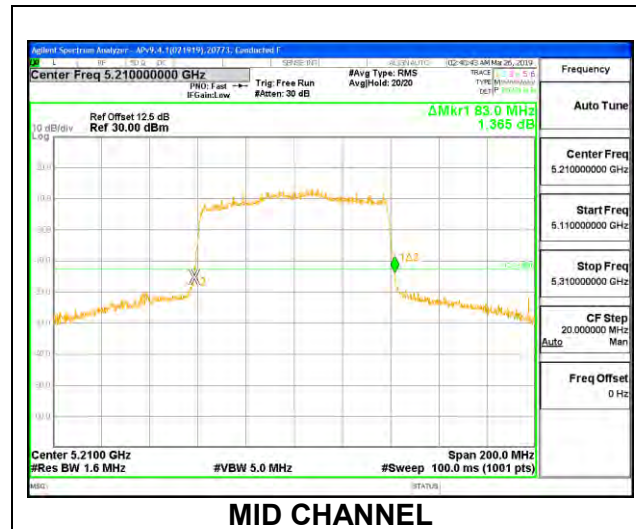


1TX Antenna 4 MODE – 26 Tones, RU Index 0

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	20.60

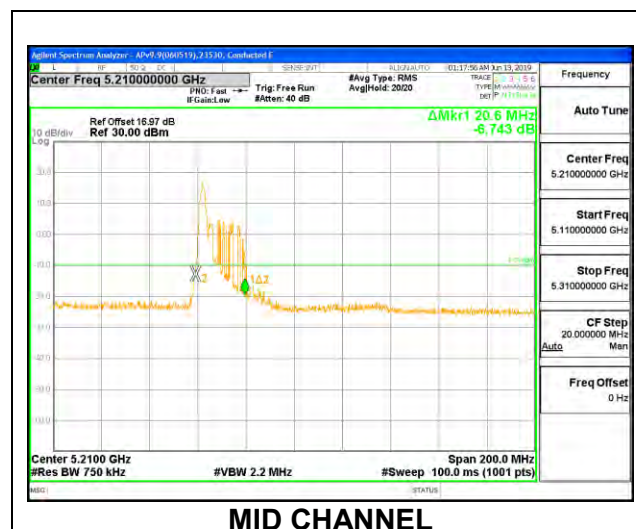


1TX Antenna 4 MODE – 26 Tones, RU Index 18

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	45.00

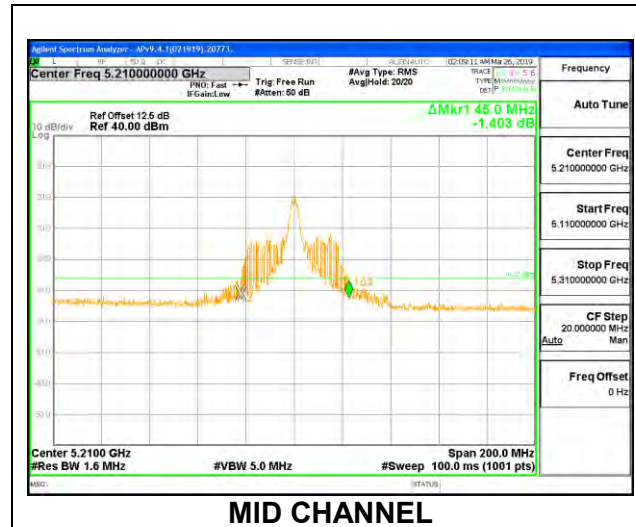
**1TX Antenna 4 MODE – 26 Tones, RU Index 36**

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	21.60

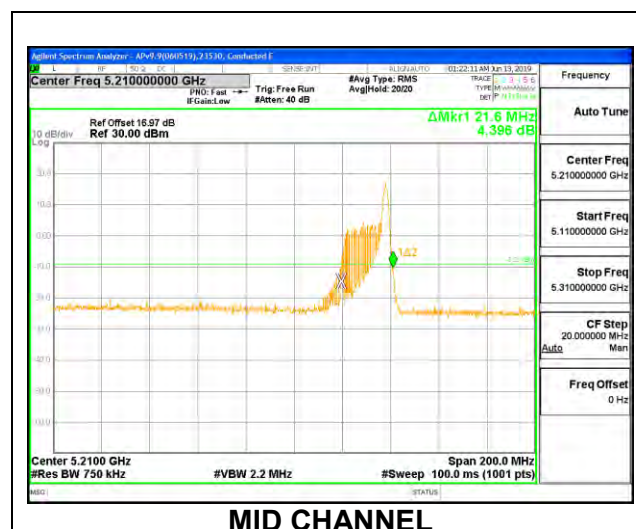


1TX Antenna 5 MODE – 996 Tones, RU Index 67

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	82.80

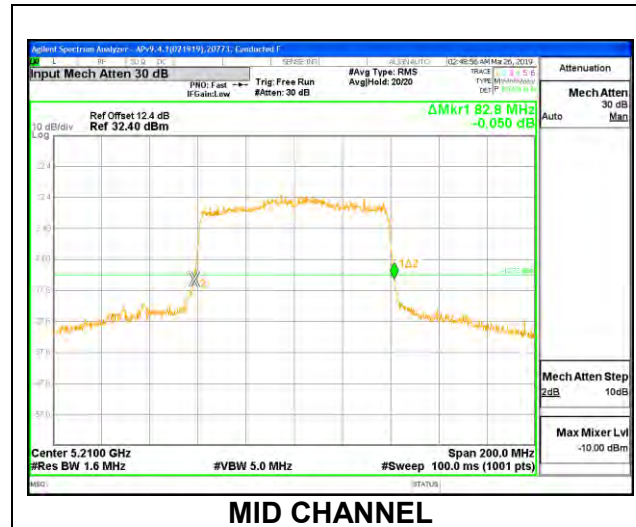
**1TX Antenna 5 MODE – 26 Tones, RU Index 0**

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	20.40

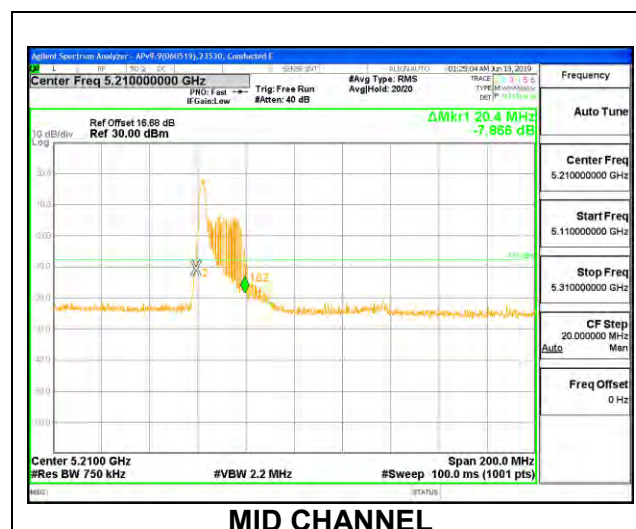


1TX Antenna 5 MODE – 26 Tones, RU Index 18

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	46.00

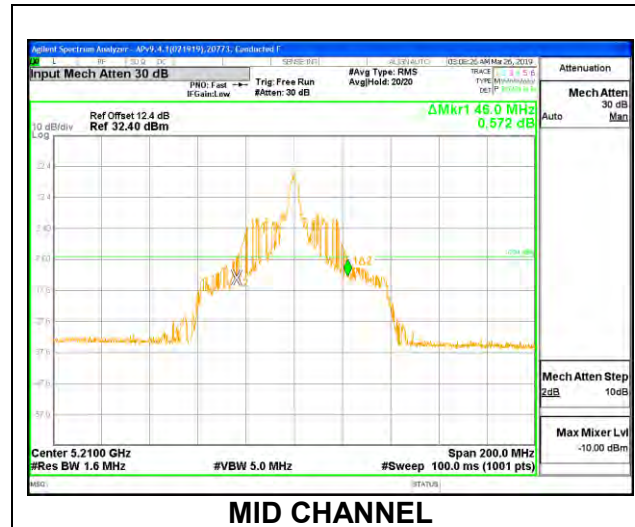
**1TX Antenna 5 MODE – 26 Tones, RU Index 36**

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	21.20

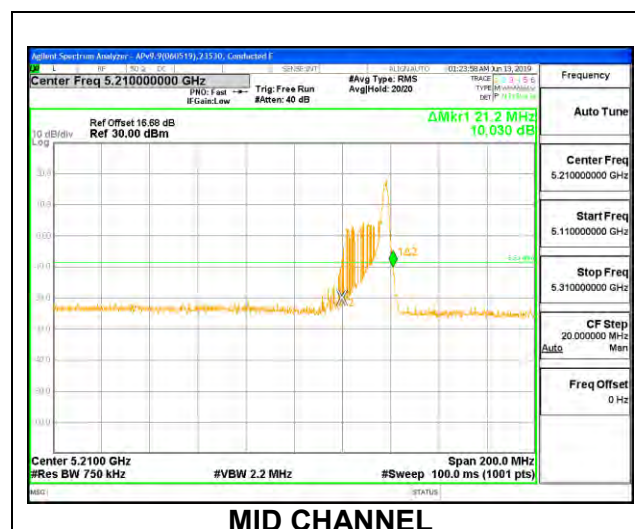


2TX Antenna 4 + Antenna 5 CDD MODE – 996 Tones, RU 67

Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
		Ant 4	Ant 5
	(MHz)	(MHz)	(MHz)
Mid	5210	83.20	82.80


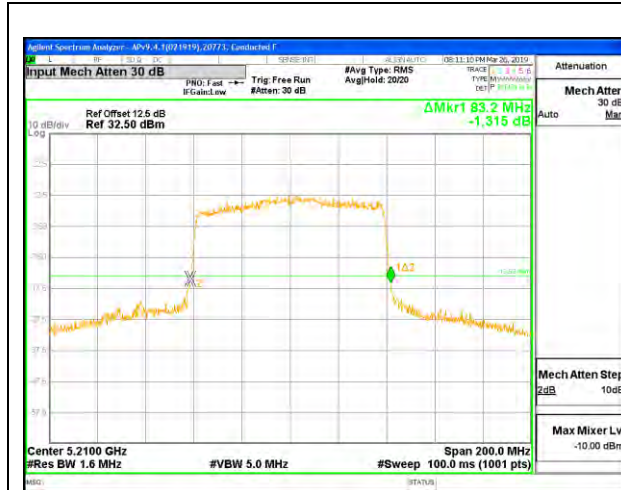
**MID CHANNEL ANT 4****MID CHANNEL ANT 5****2TX Antenna 4 + Antenna 5 CDD MODE – 26 Tones, RU 0**

Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
		Ant 4	Ant 5
	(MHz)	(MHz)	(MHz)
Mid	5210	20.00	18.80

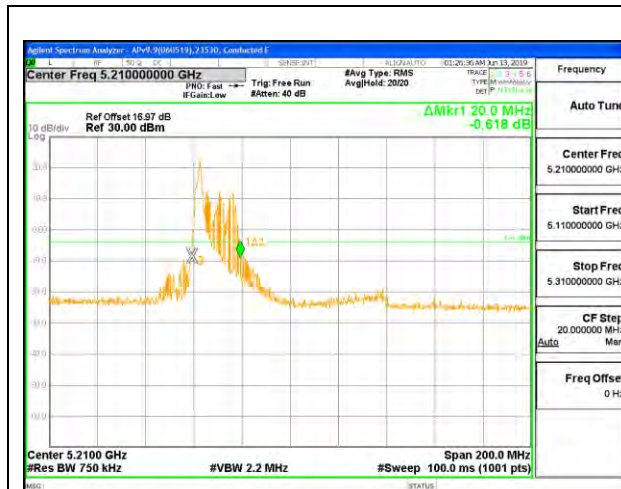
**MID CHANNEL ANT 4****MID CHANNEL ANT 5**

2TX Antenna 4 + Antenna 5 CDD MODE – 26 Tones, RU 18

Channel	Frequency (MHz)	26 dB Bandwidth	26 dB Bandwidth
		Ant 4 (MHz)	Ant 5 (MHz)
Mid	5210	45.00	42.60

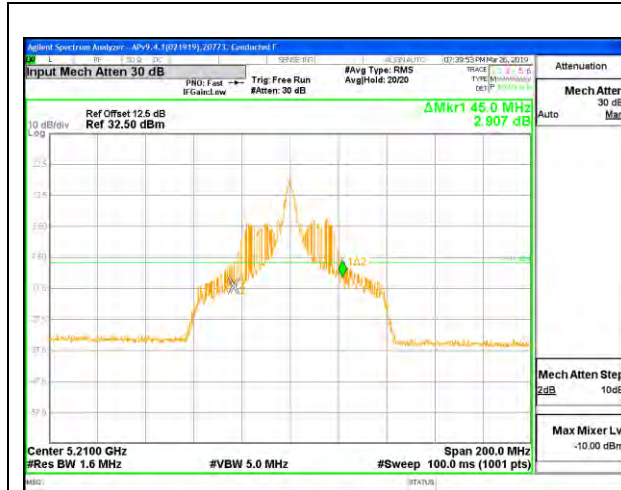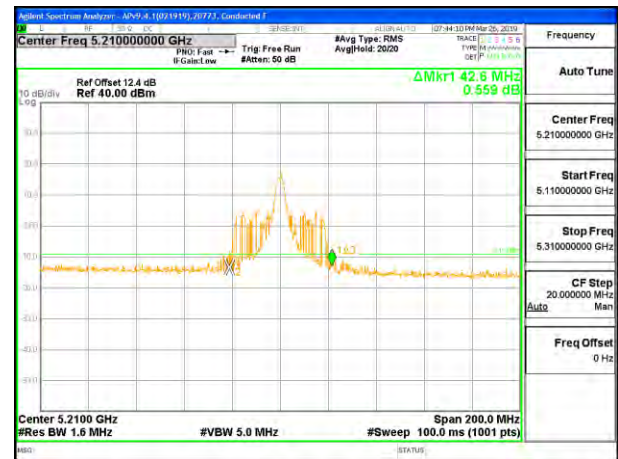**MID CHANNEL ANT 4****MID CHANNEL ANT 5****2TX Antenna 4 + Antenna 5 CDD MODE – 26 Tones, RU 36**


Channel	Frequency (MHz)	26 dB Bandwidth	26 dB Bandwidth
		Ant 4 (MHz)	Ant 5 (MHz)
Mid	5210	20.40	20.00

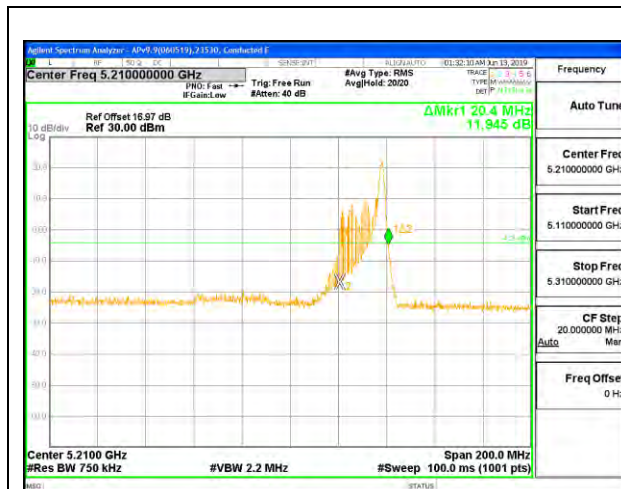**MID CHANNEL ANT 4****MID CHANNEL ANT 5**


8.2.7. 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX Antenna 4 MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	21.95
Mid	5300	22.05
High	5320	22.00

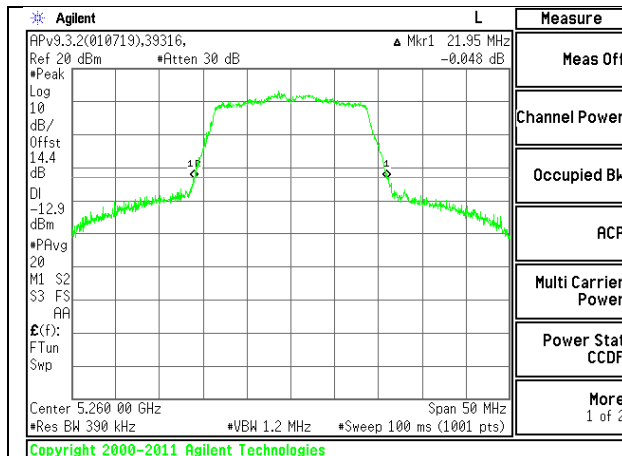

LOW CHANNEL

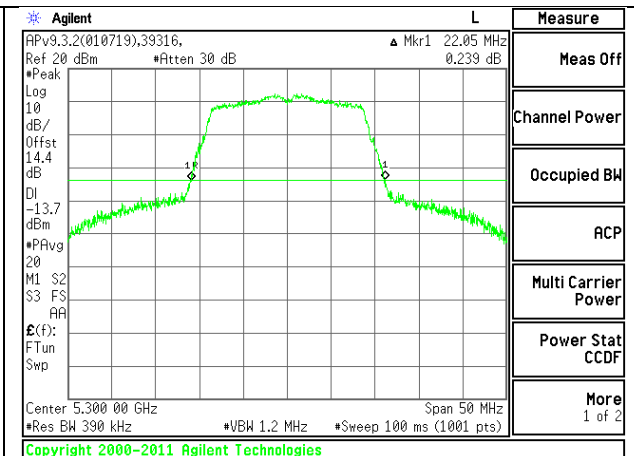




MID CHANNEL

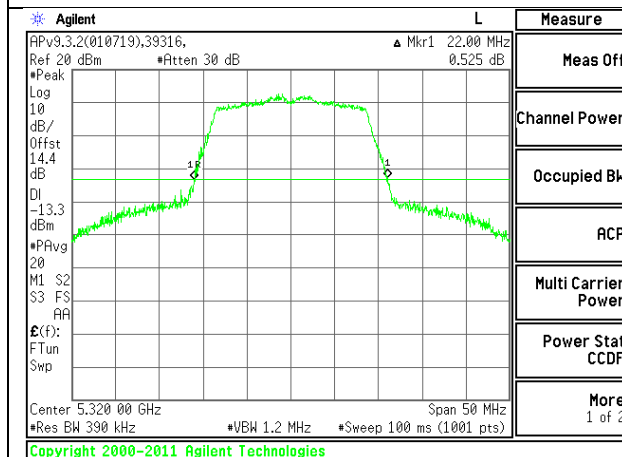

HIGH CHANNEL





1TX Antenna 5 MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	22.10
Mid	5300	22.00
High	5320	22.15

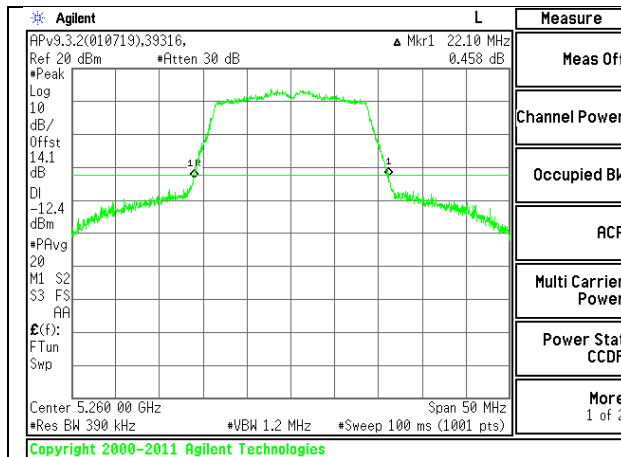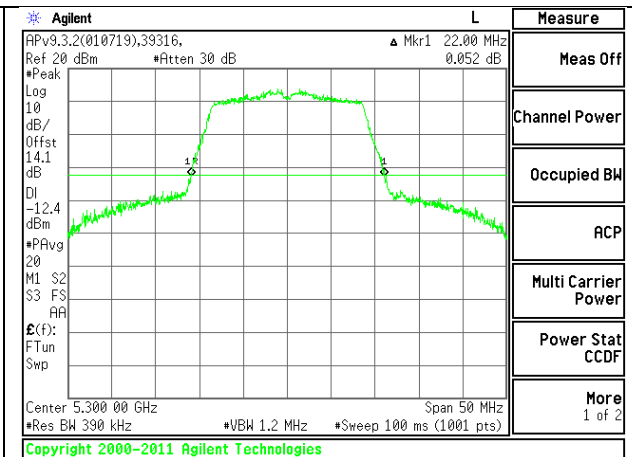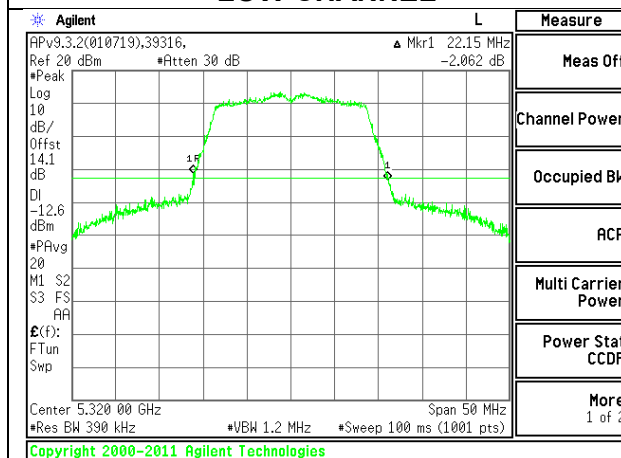**LOW CHANNEL****MID CHANNEL****HIGH CHANNEL**

2TX Antenna 4 + Antenna 5 CDD MODE

Channel	Frequency	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5260	21.95	21.65
Mid	5300	21.95	21.75
High	5320	21.90	21.55

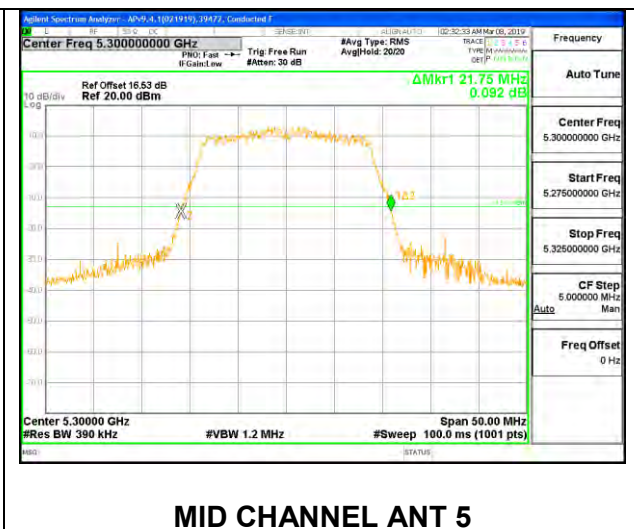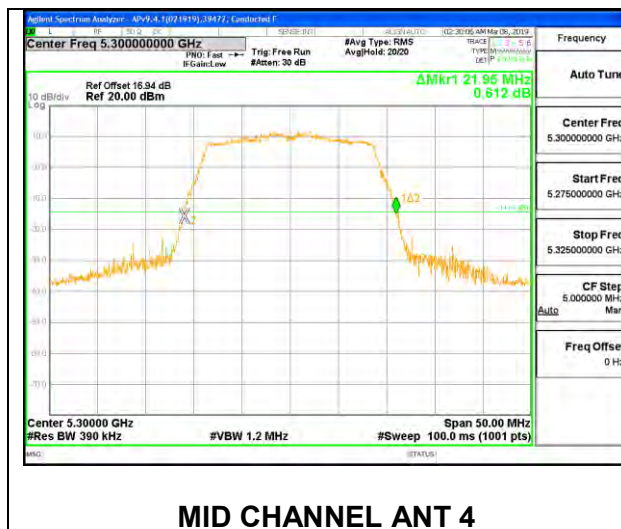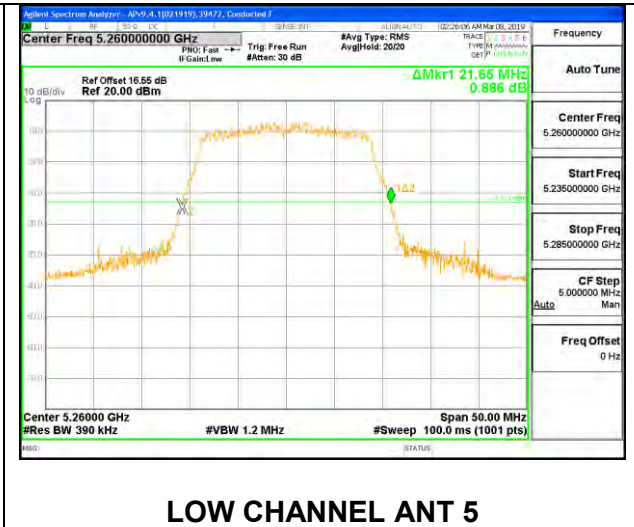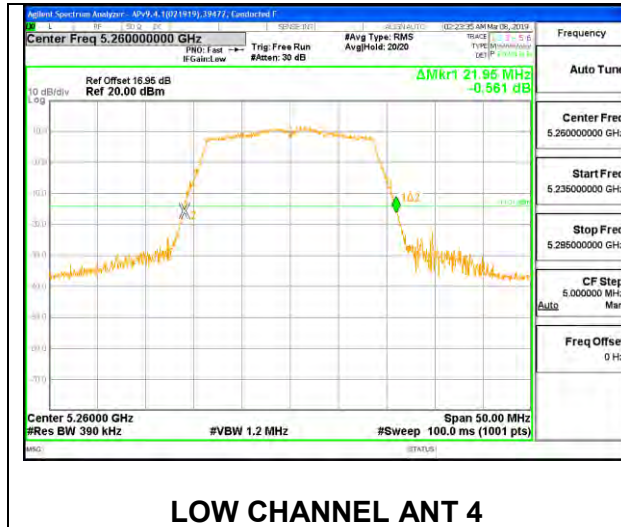


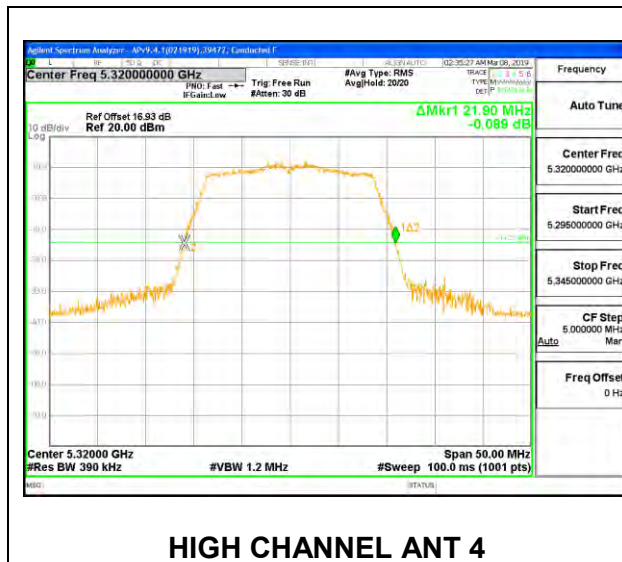

8.2.8. 802.11n HT40 MODE IN THE 5.3 GHz BAND


1TX Antenna 4 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	41.50
High	5310	40.40

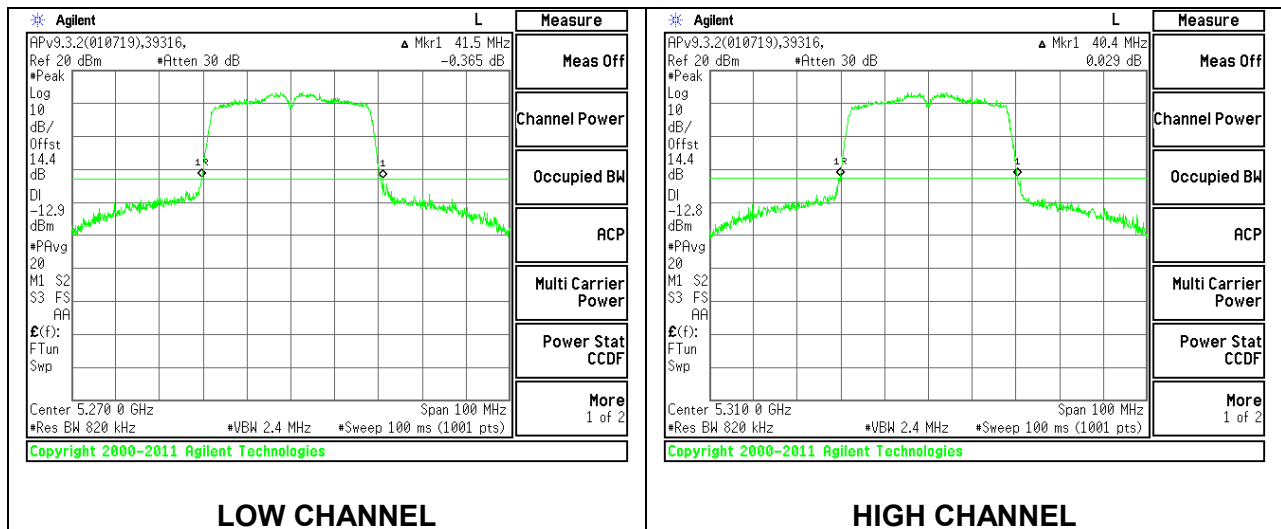





1TX Antenna 5 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	40.90
High	5310	40.60

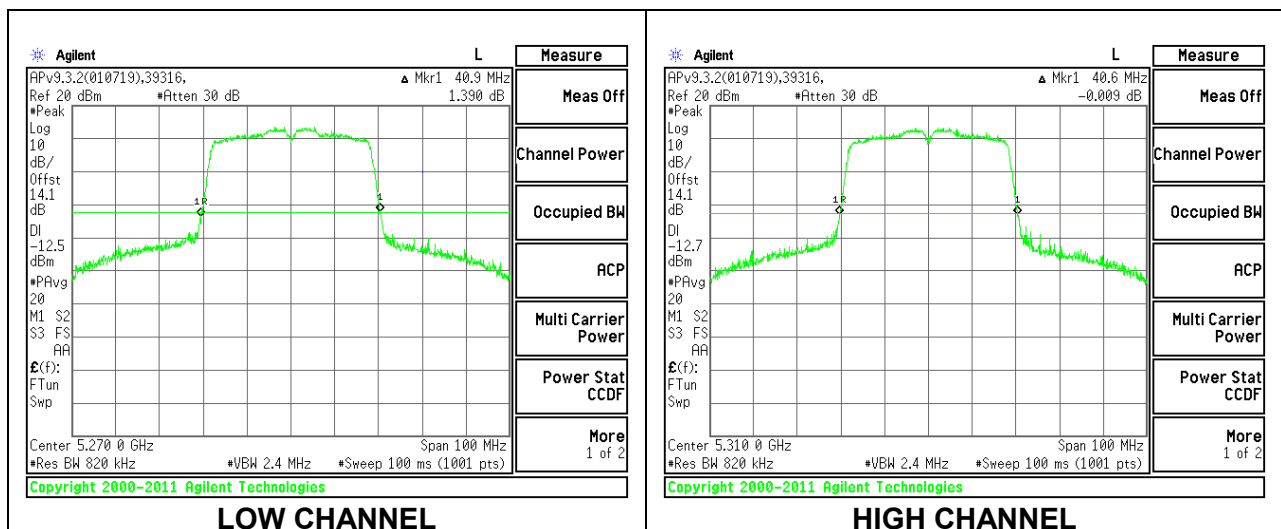

2TX Antenna 4 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5270	40.70	40.20
High	5310	40.70	40.30

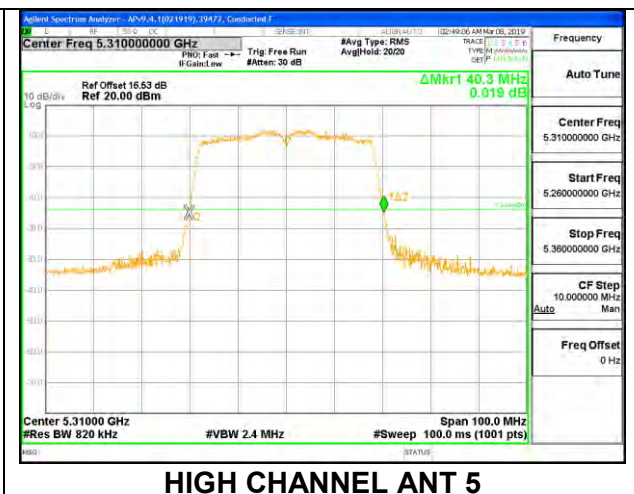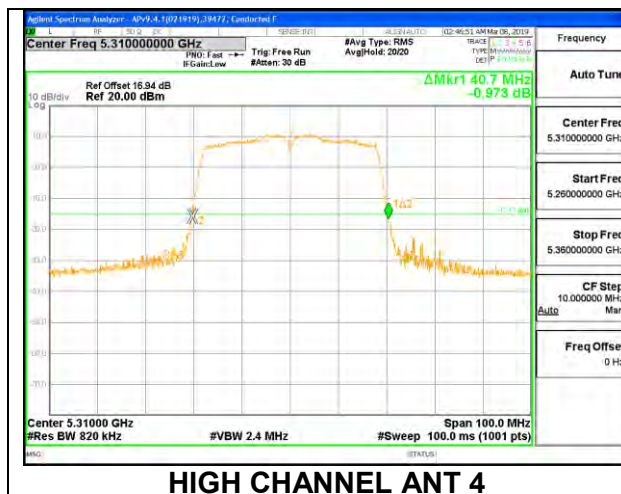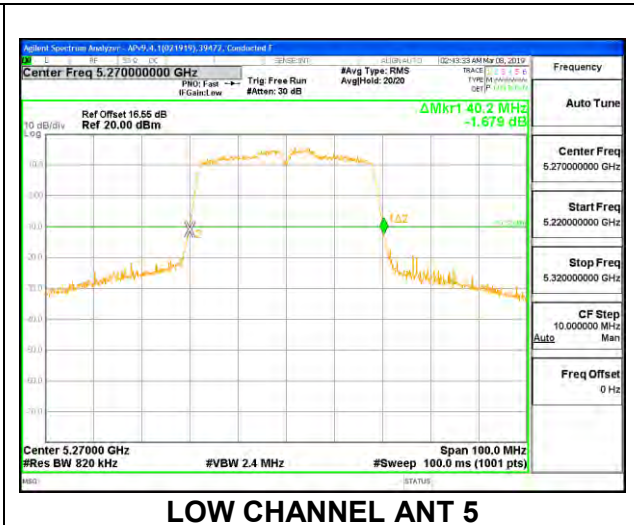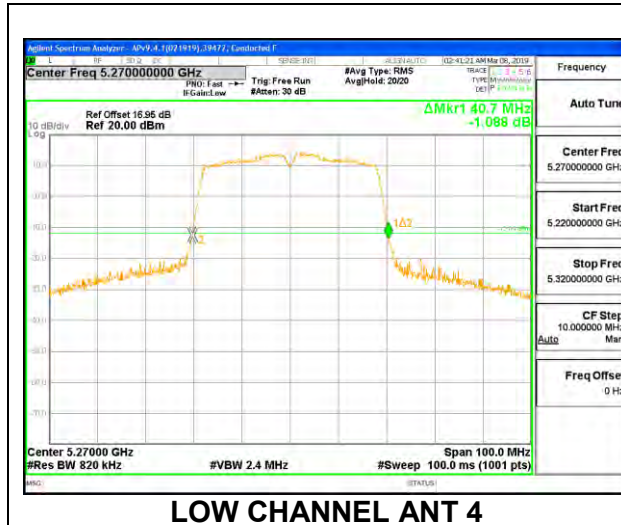

8.2.9. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND


1TX Antenna 4 MODE

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5290	82.80

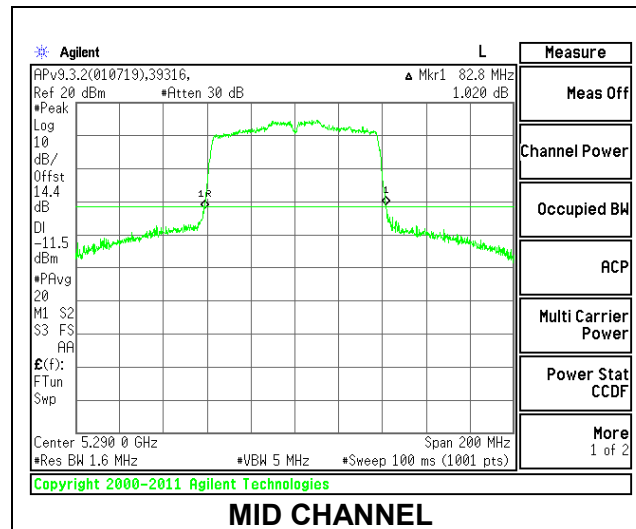



1TX Antenna 5 MODE

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5290	82.80

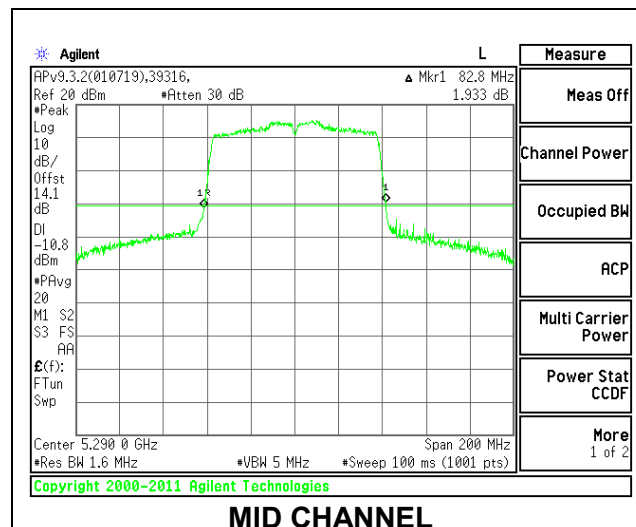

2TX Antenna 4 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Mid	5290	83.00	83.80

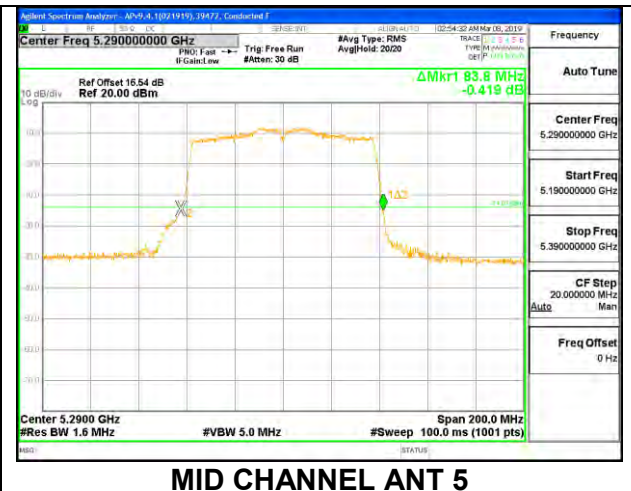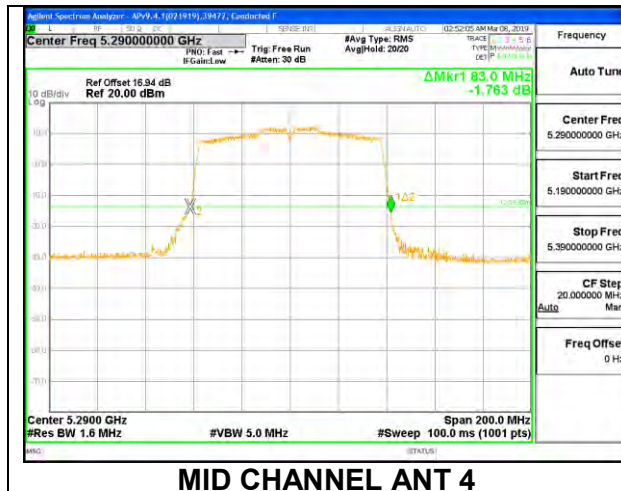

8.2.10. 802.11ax HE20 MODE IN THE 5.3 GHz BAND


1TX Antenna 4 MODE – 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.80
Mid	5300	22.00
High	5320	21.90

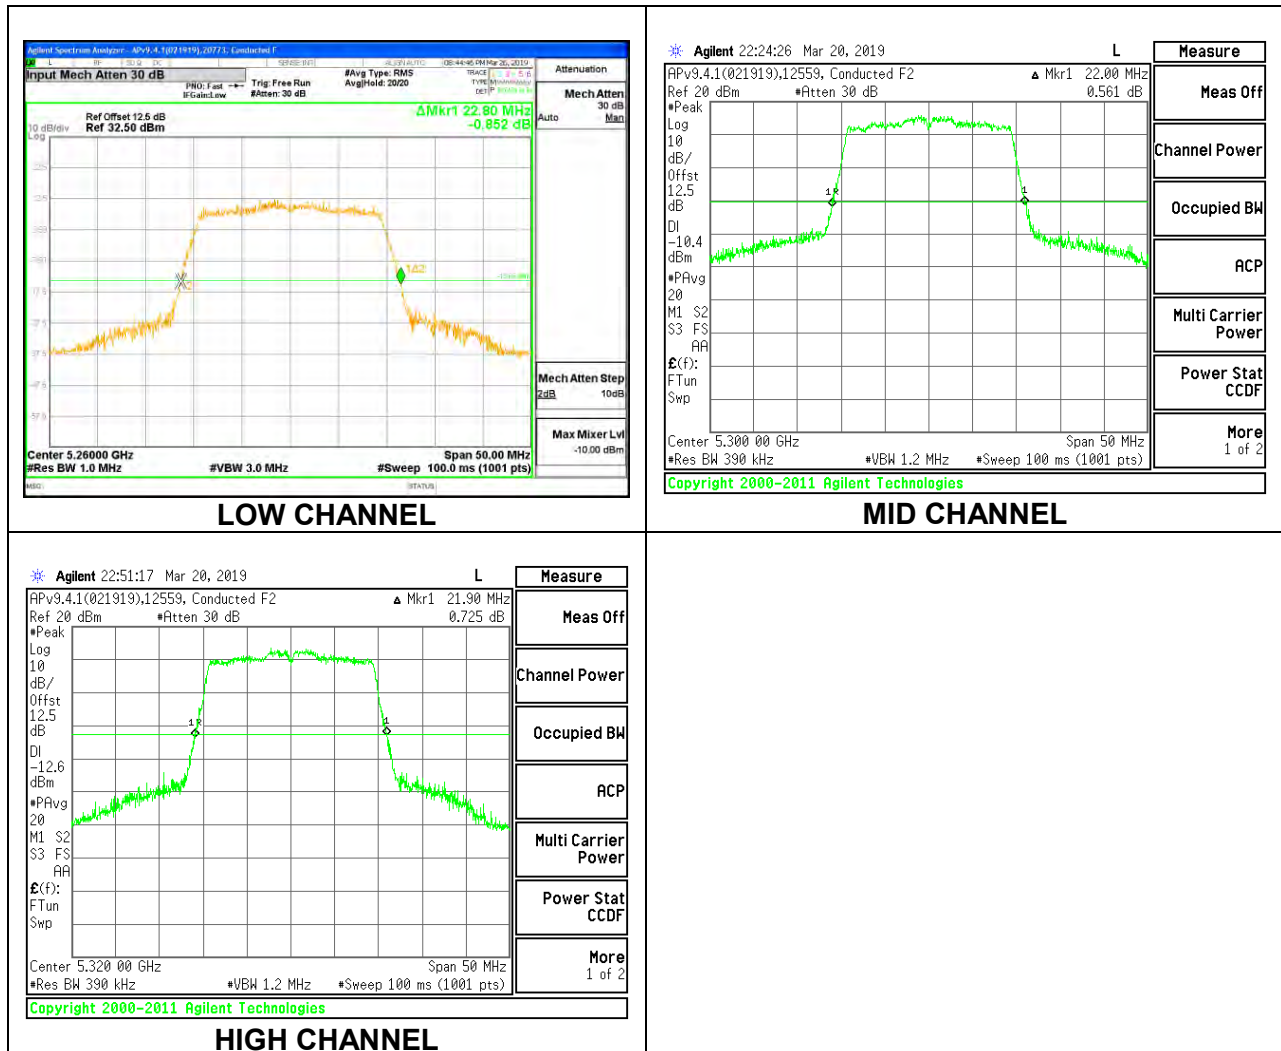


1TX Antenna 4 MODE – 26 Tones, RU Index 0

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	20.65
Mid	5300	20.65
High	5320	20.65

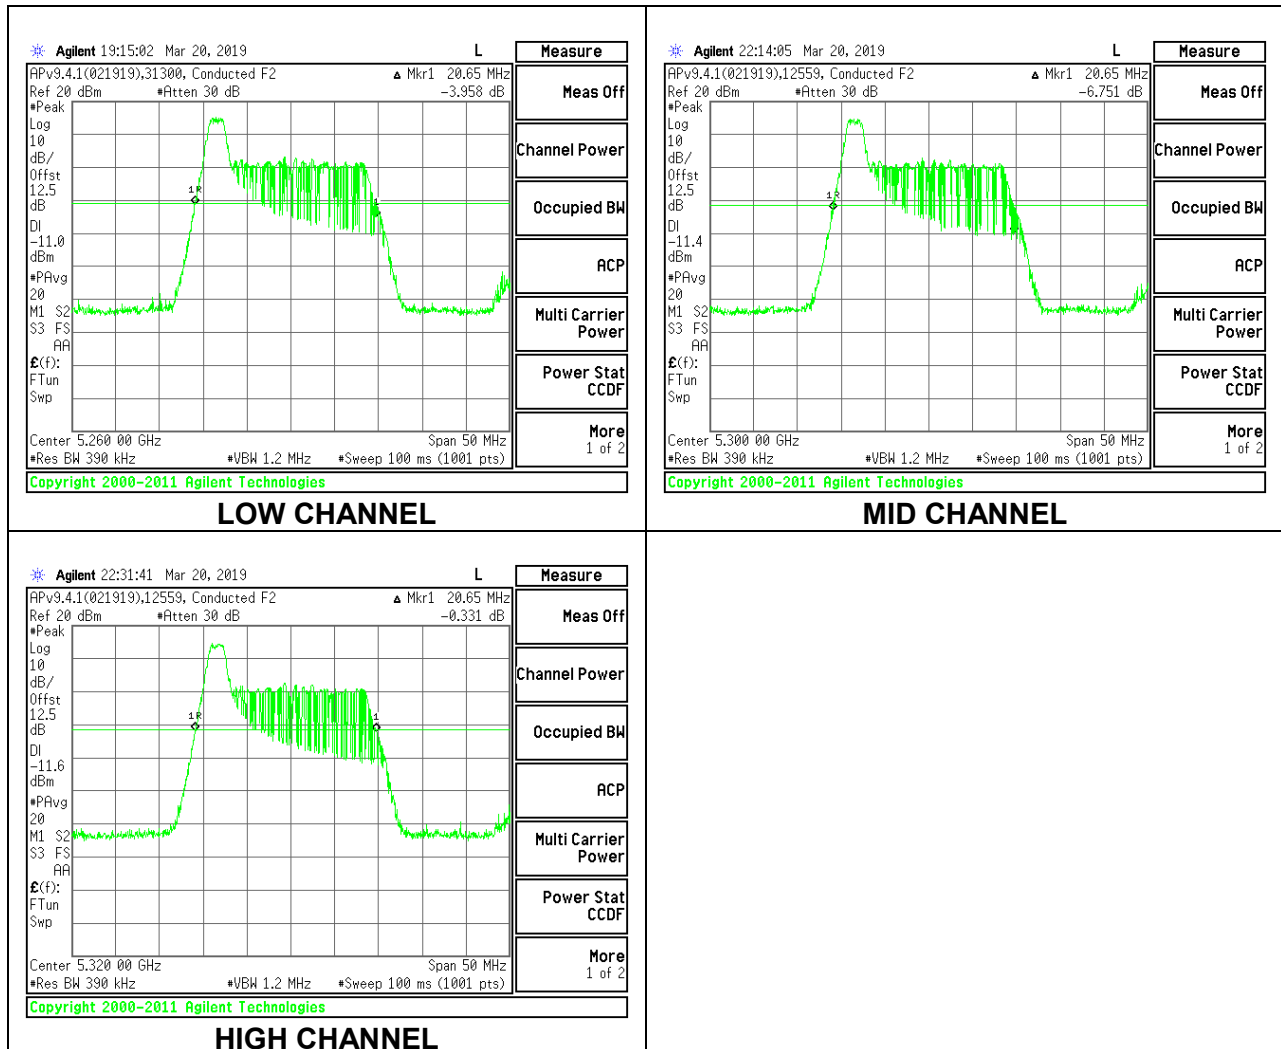


1TX Antenna 4 MODE – 26 Tones, RU Index 4

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	19.85
Mid	5300	19.70
High	5320	19.80

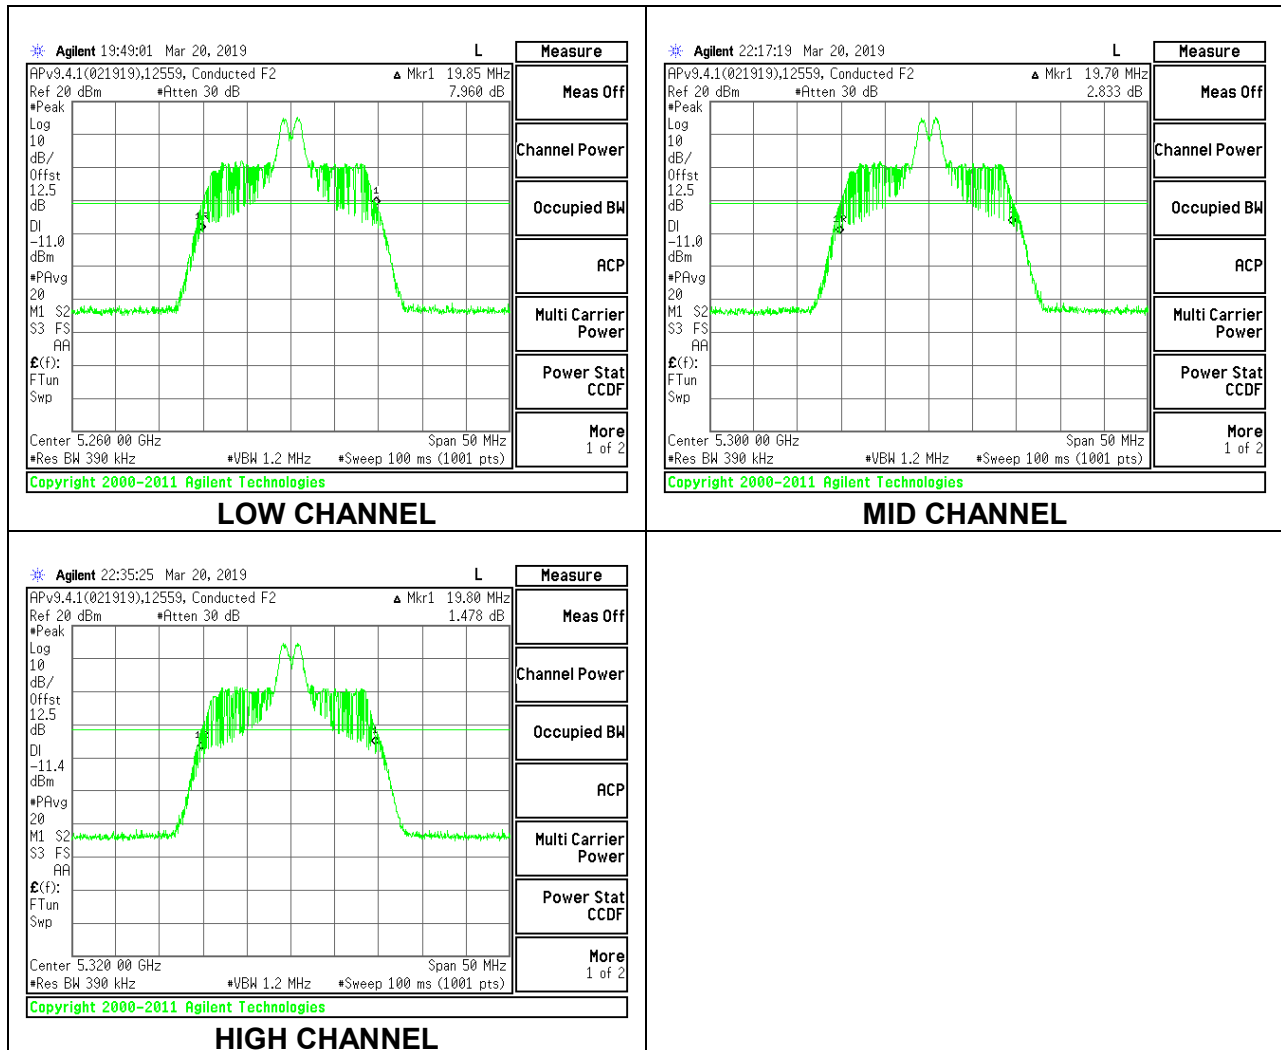


1TX Antenna 4 MODE – 26 Tones, RU Index 8

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	21.15
Mid	5300	21.10
High	5320	21.20

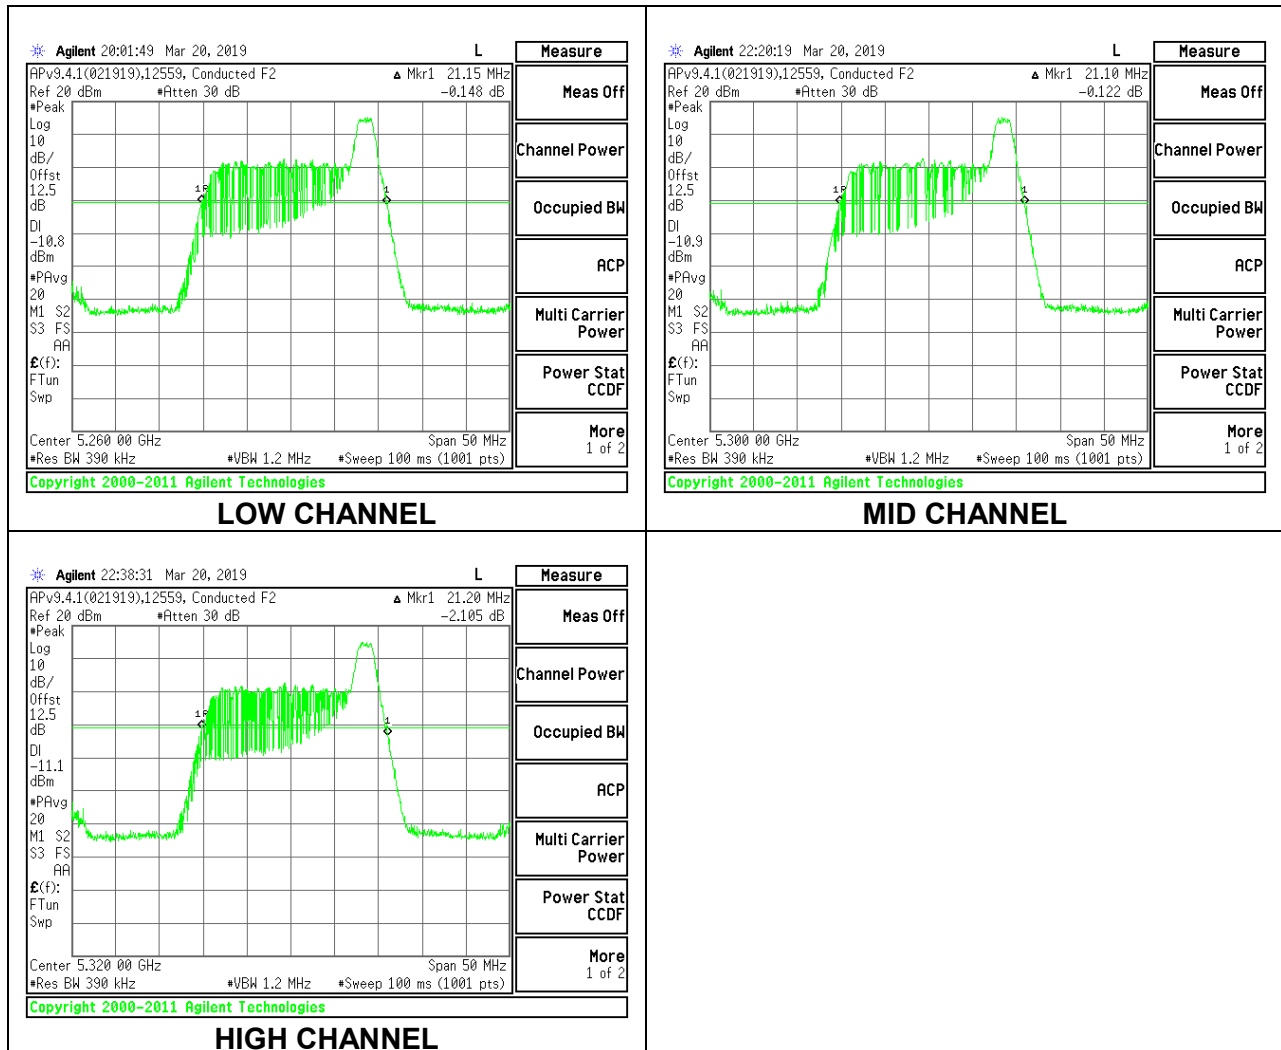




1TX Antenna 5 MODE – 242 Tones, RU Index 61

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	22.65
Mid	5300	23.00
High	5320	22.00

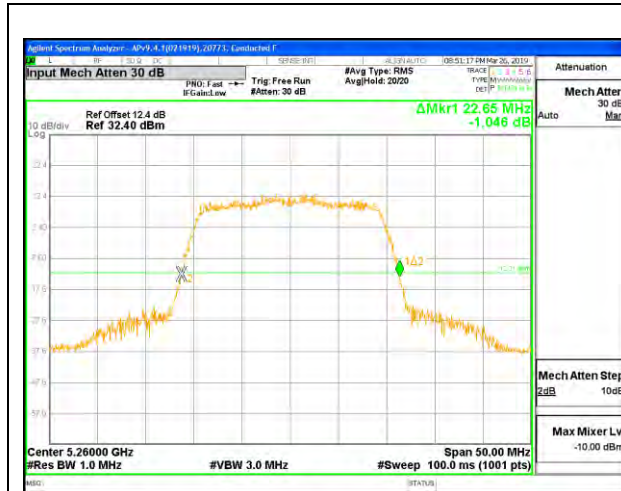**LOW CHANNEL****MID CHANNEL****HIGH CHANNEL**



1TX Antenna 5 MODE – 26 Tones, RU Index 0

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	20.80
Mid	5300	20.70
High	5320	20.55

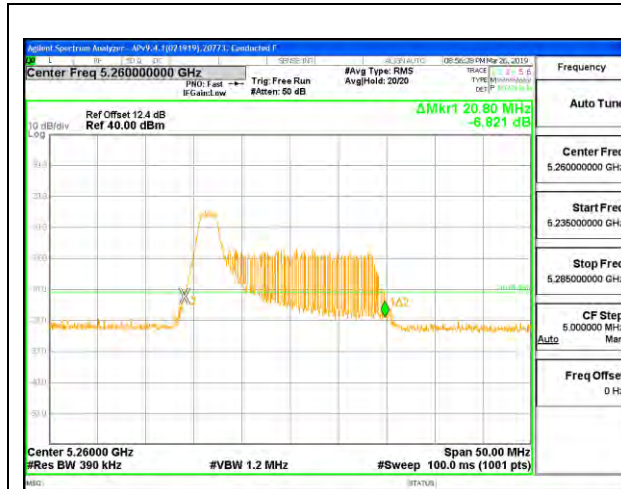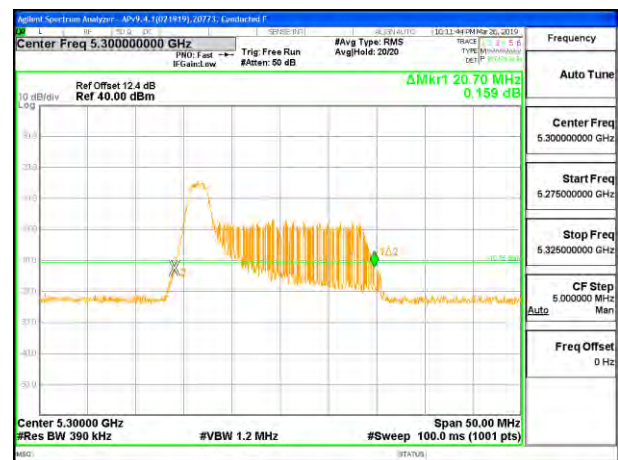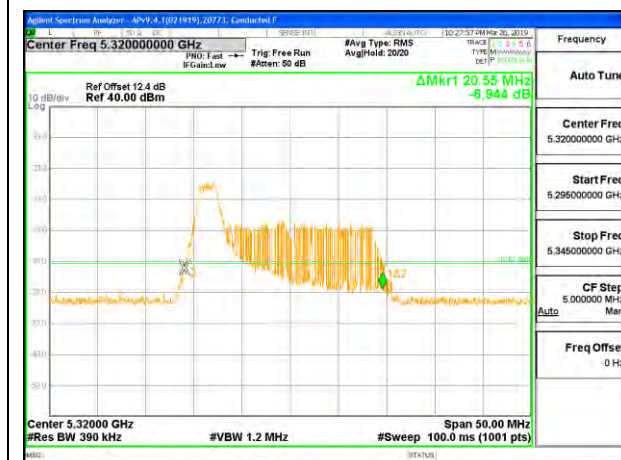**LOW CHANNEL****MID CHANNEL****HIGH CHANNEL**




1TX Antenna 5 MODE – 26 Tones, RU Index 4

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	19.80
Mid	5300	19.60
High	5320	19.70

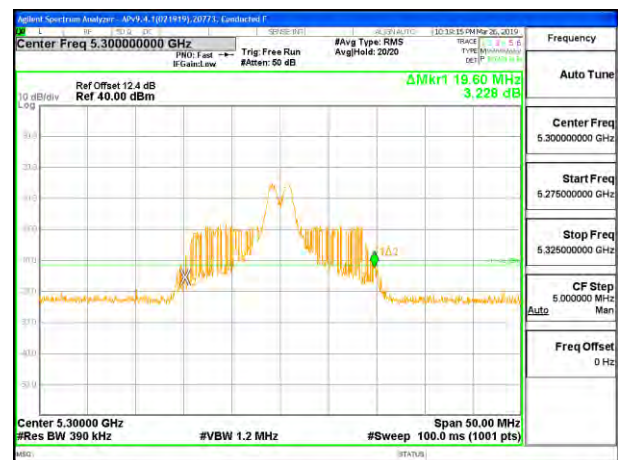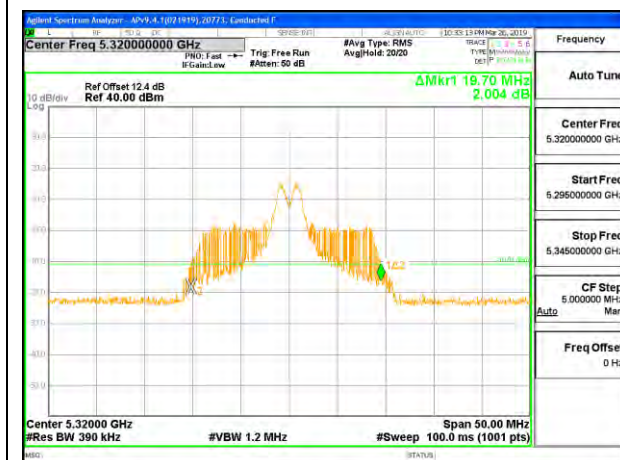**LOW CHANNEL****MID CHANNEL****HIGH CHANNEL**





1TX Antenna 5 MODE – 26 Tones, RU Index 8


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	21.25
Mid	5300	21.00
High	5320	21.25

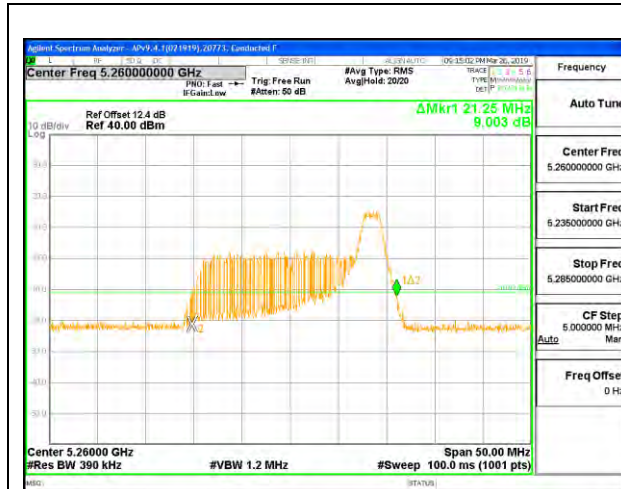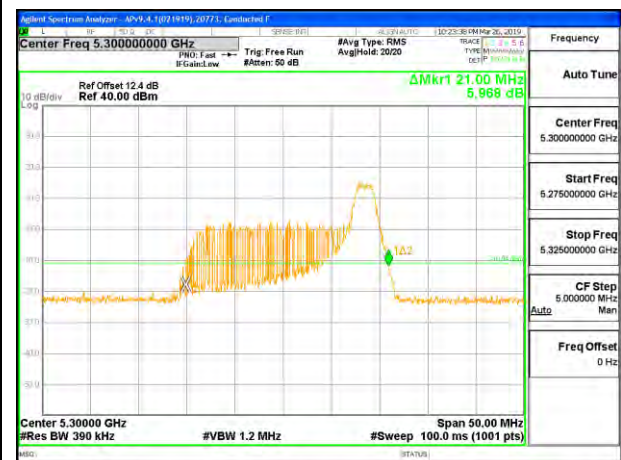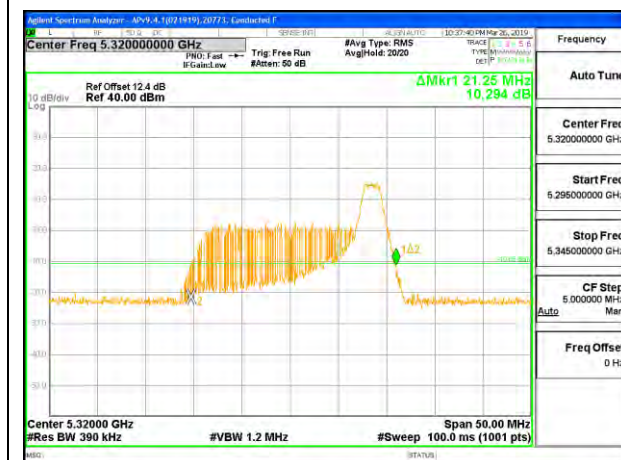**LOW CHANNEL****MID CHANNEL****HIGH CHANNEL**

2TX Antenna 4 + Antenna 5 OFDMA MODE – 242 Tones, RU Index 61





Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5260	22.15	21.65
Mid	5300	22.30	21.80
High	5320	22.20	21.95

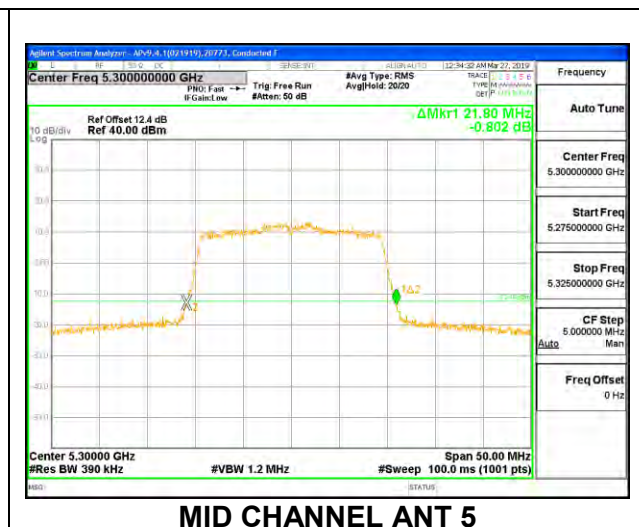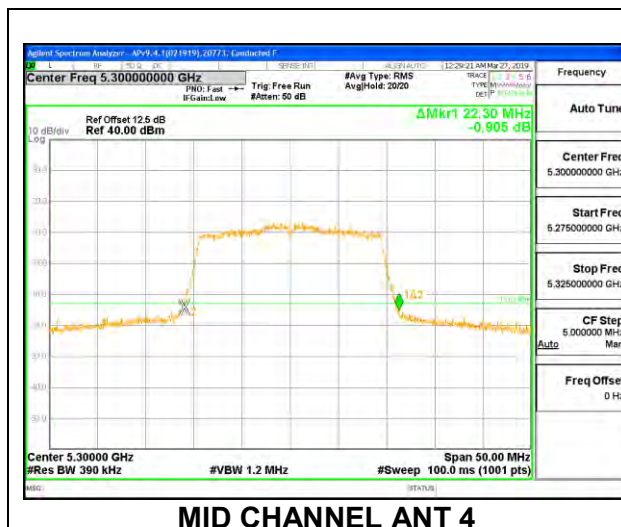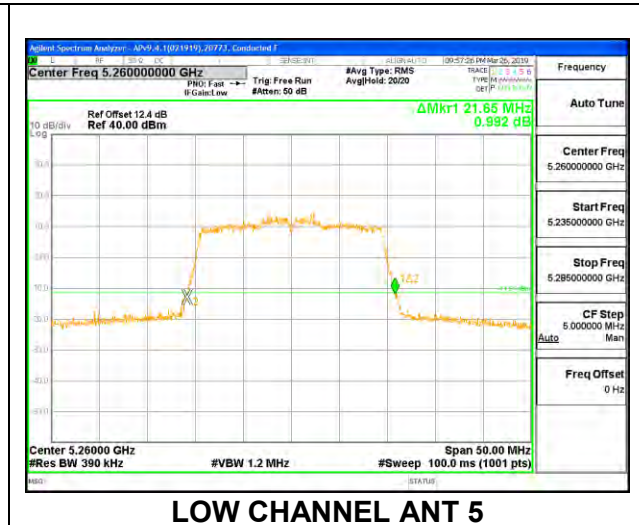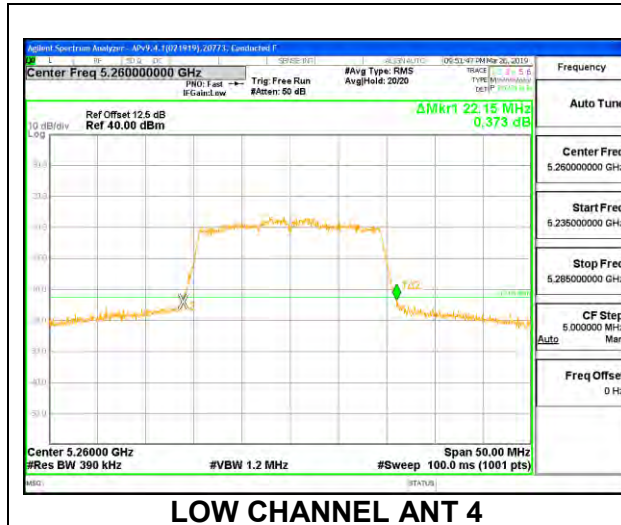


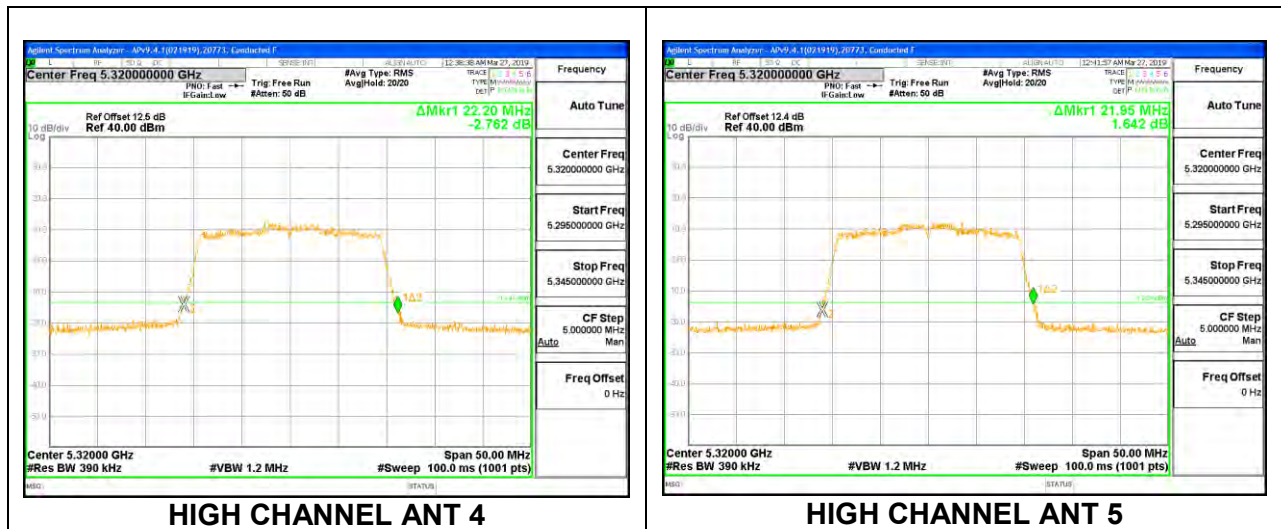

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 0





Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
	(MHz)	Ant 4	Ant 5
		(MHz)	(MHz)
Low	5260	20.50	20.10
Mid	5300	20.95	20.30
High	5320	20.75	20.20

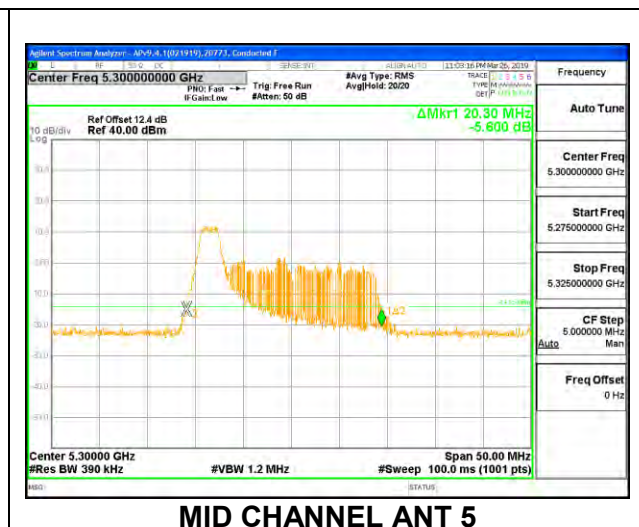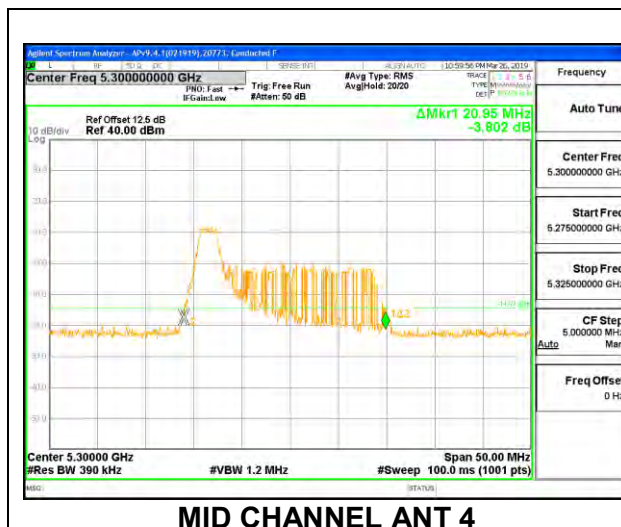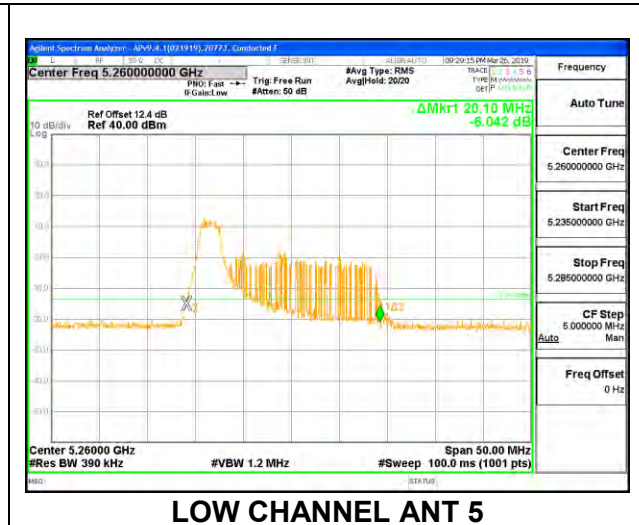
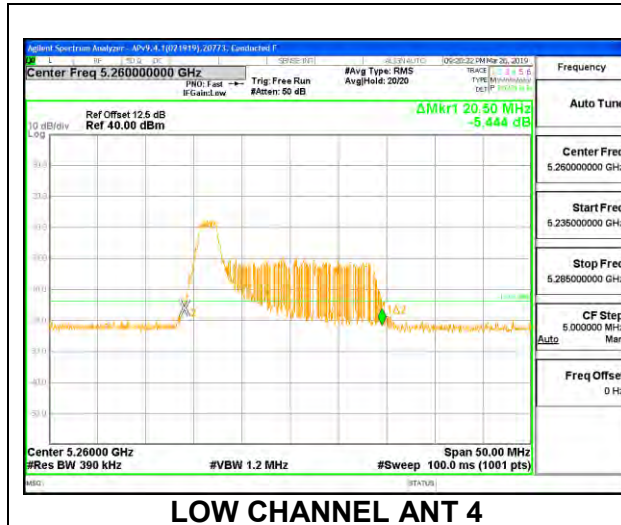


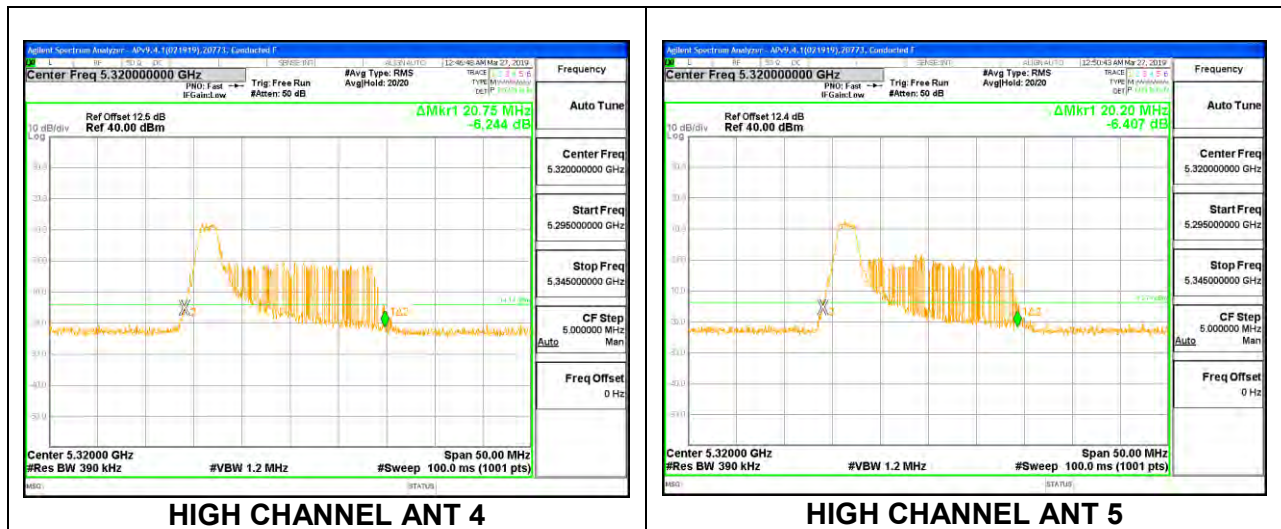

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 4





Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5260	20.00	18.55
Mid	5300	19.95	18.55
High	5320	20.15	18.10

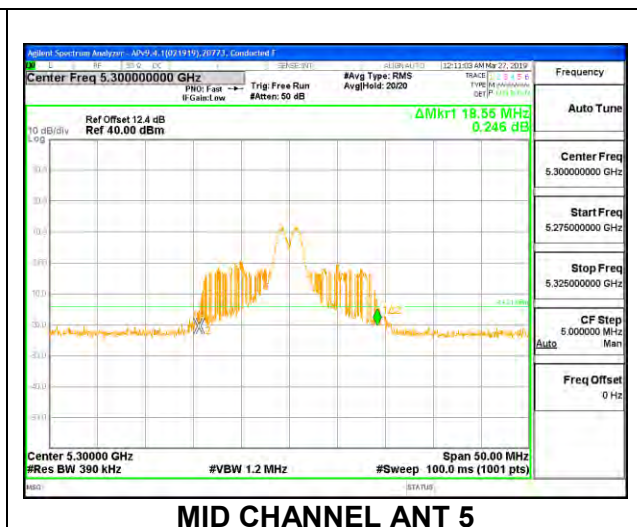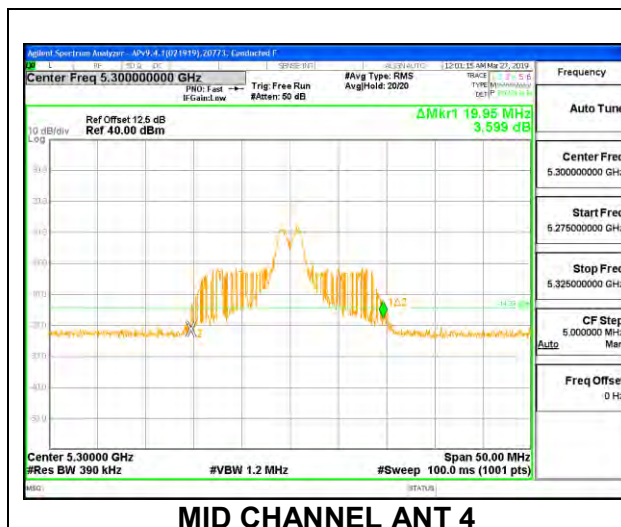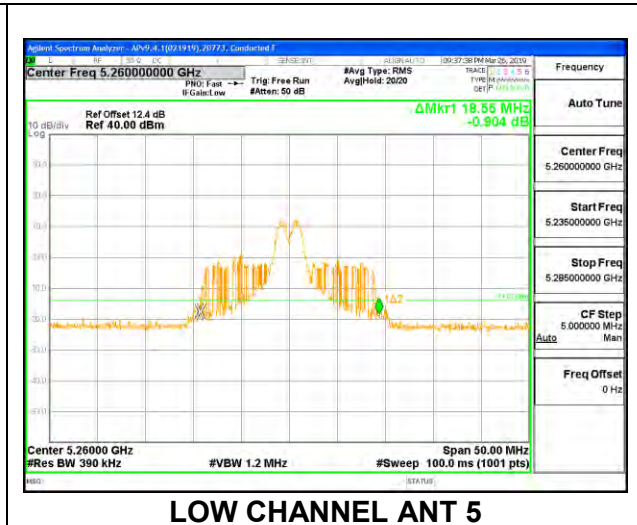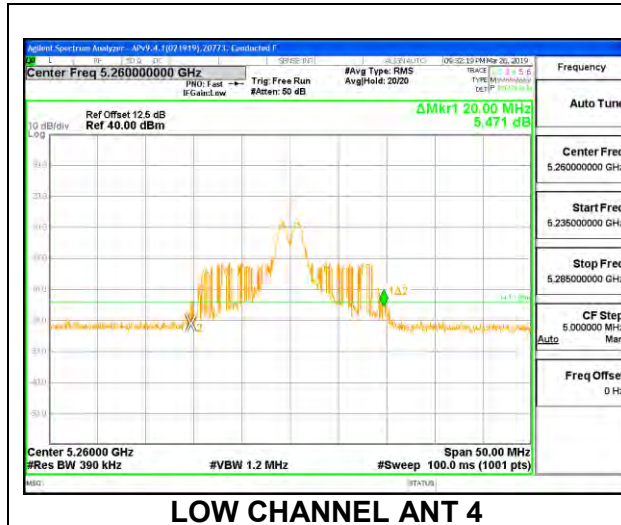


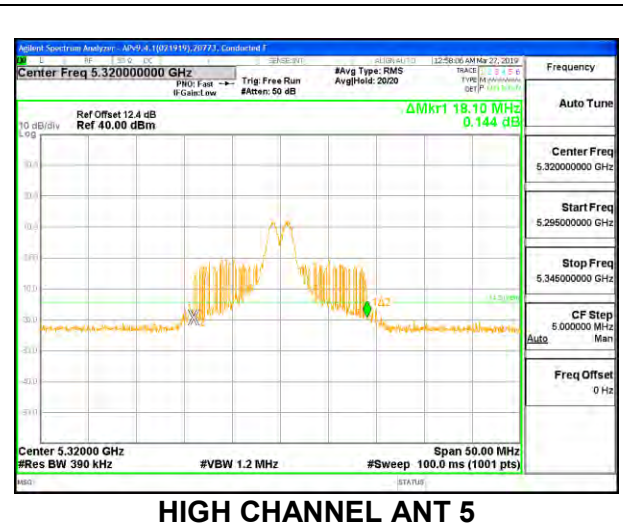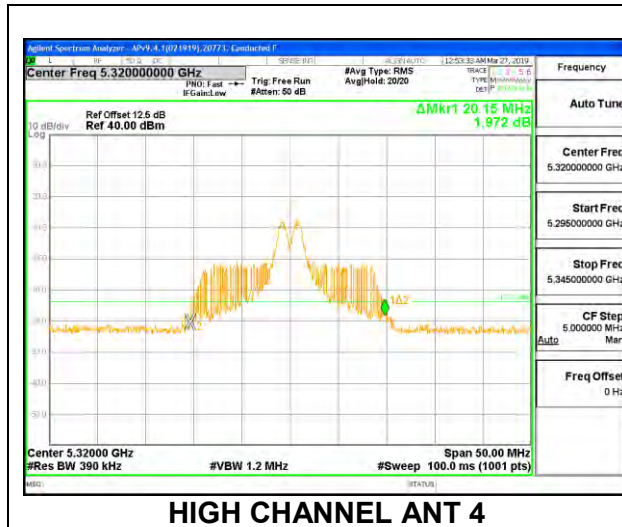

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 8

Channel	Frequency	26 dB Bandwidth	26 dB Bandwidth
	(MHz)	Ant 4	Ant 5
Low	5260	21.20	20.05
Mid	5300	21.25	20.20
High	5320	21.35	20.35

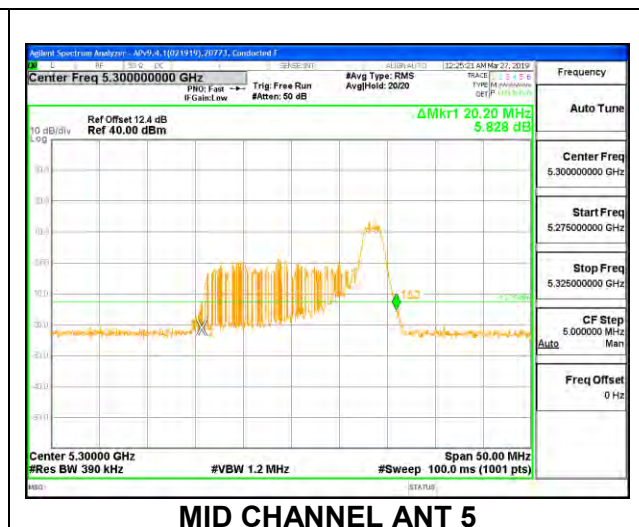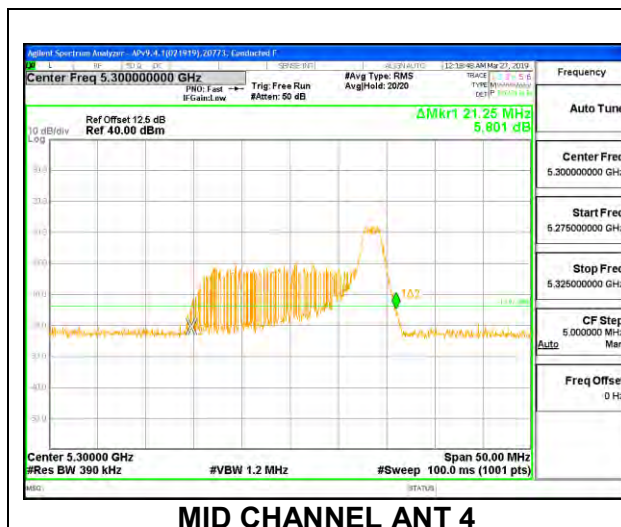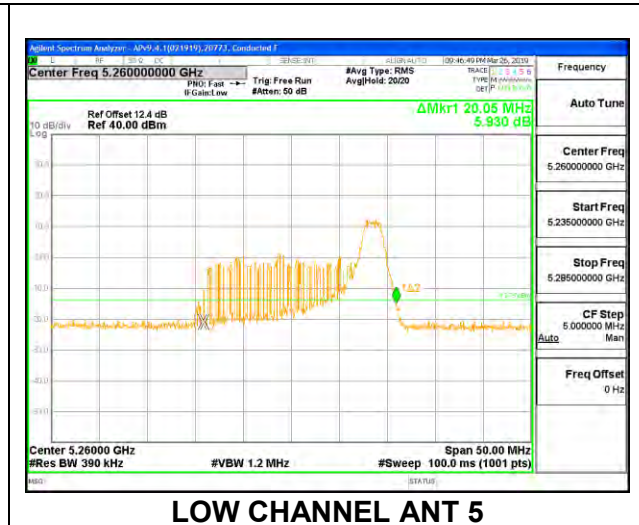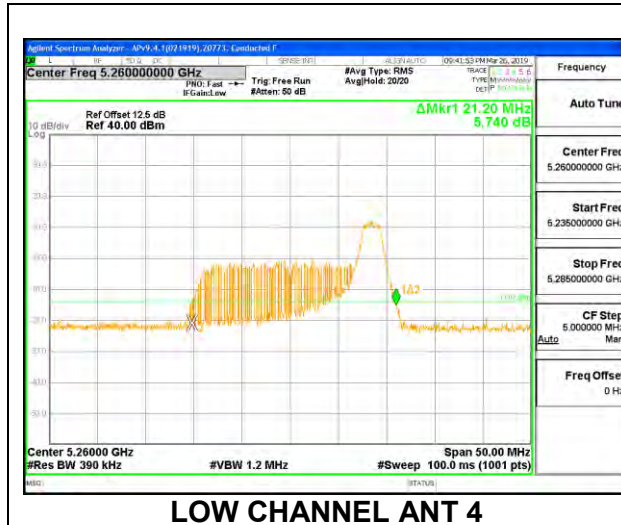


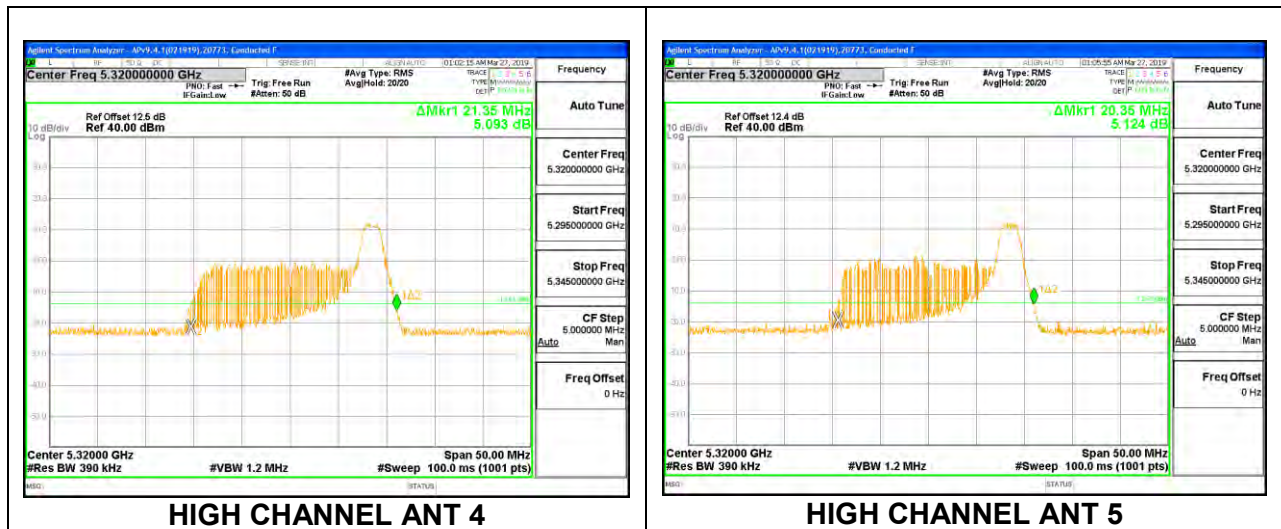

8.2.11. 802.11ax HE40 MODE IN THE 5.3 GHz BAND


1TX Antenna 4 MODE – 484 Tones, RU Index 65

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	41.20
High	5310	41.30

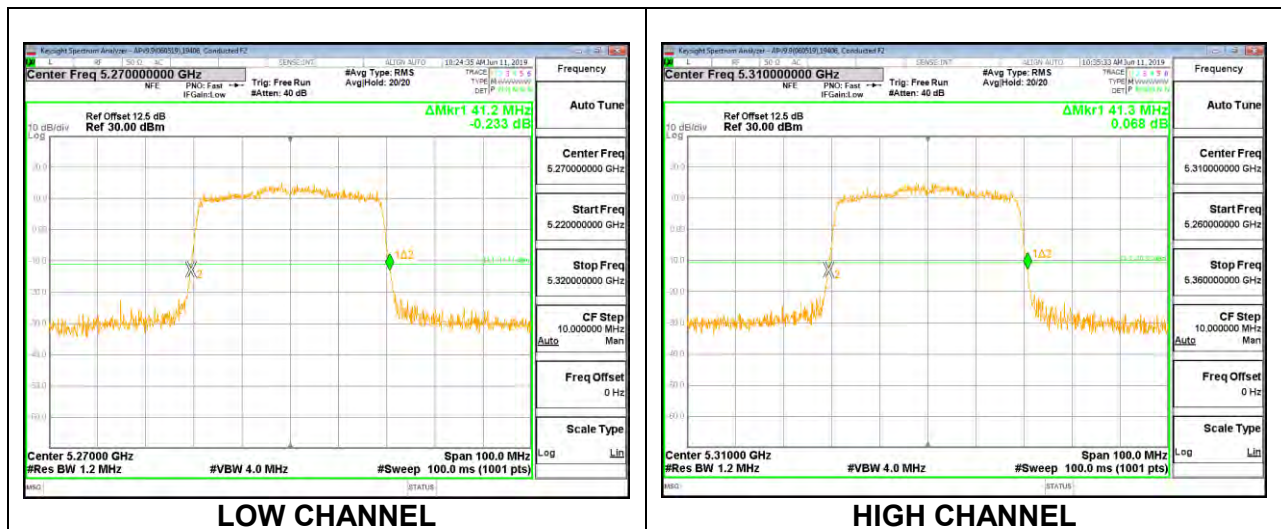


1TX Antenna 4 MODE – 26 Tones, RU Index 0

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	21.50
High	5310	21.70

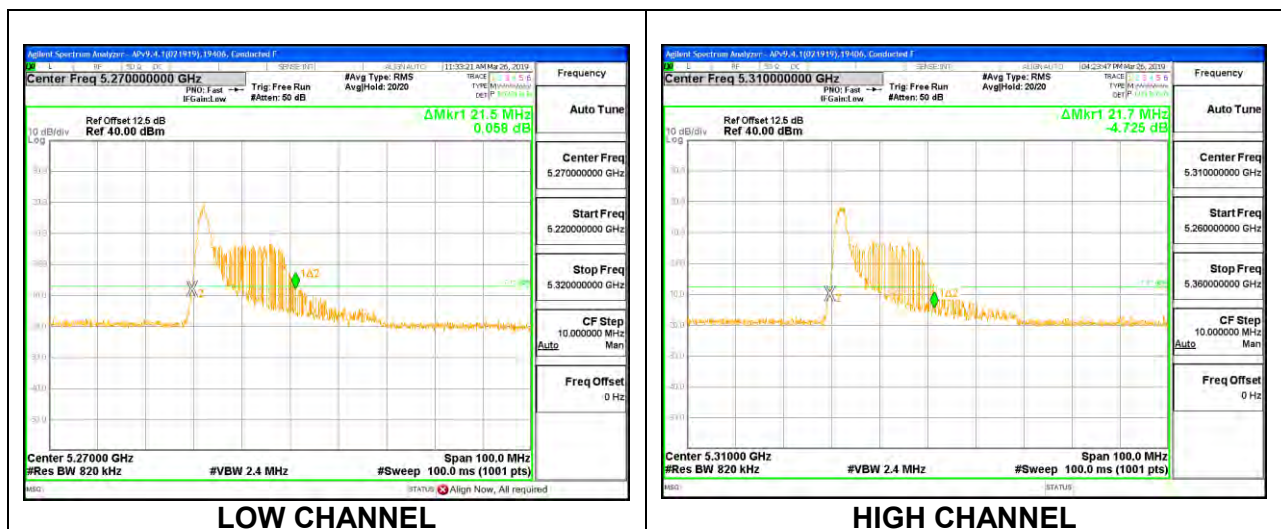


1TX Antenna 4 MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	25.70
High	5310	24.90

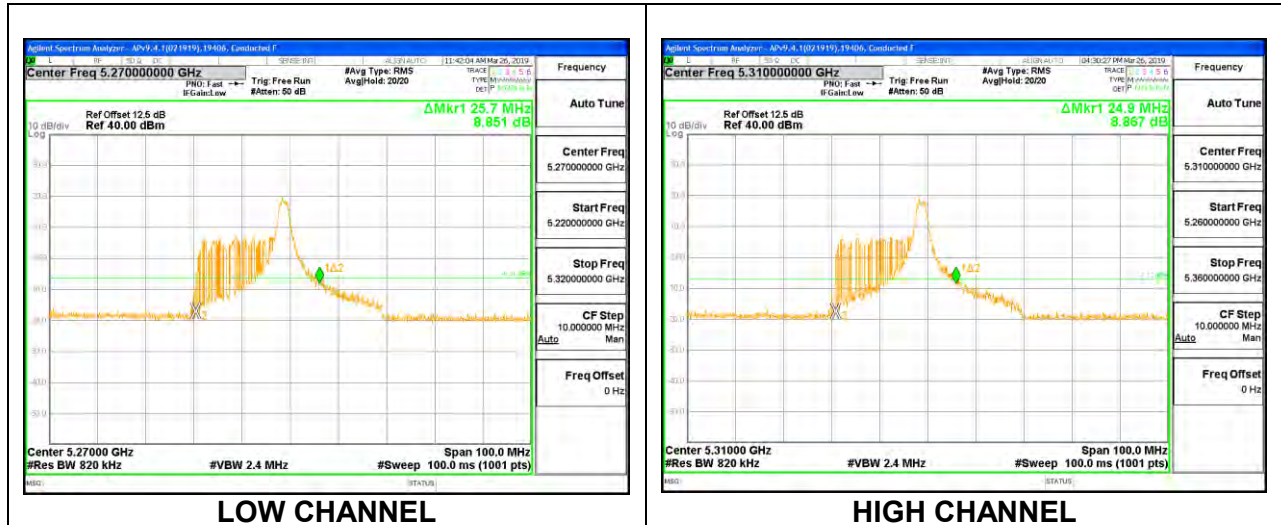
**1TX Antenna 4 MODE – 26 Tones, RU Index 17**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	22.10
High	5310	21.80

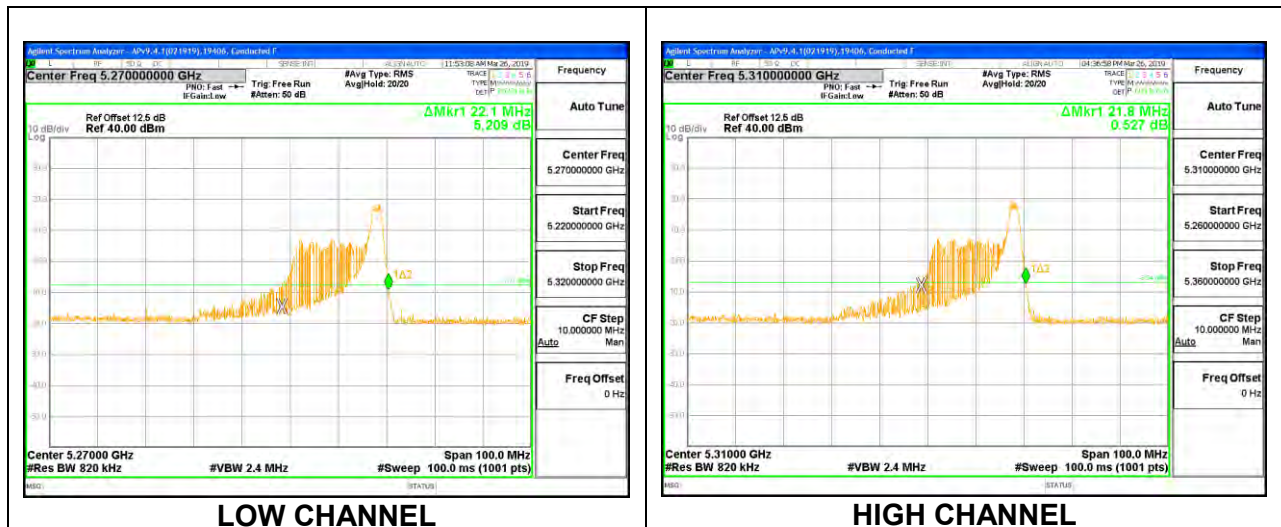


1TX Antenna 5 MODE – 484 Tones, RU Index 65

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	41.20
High	5310	41.10

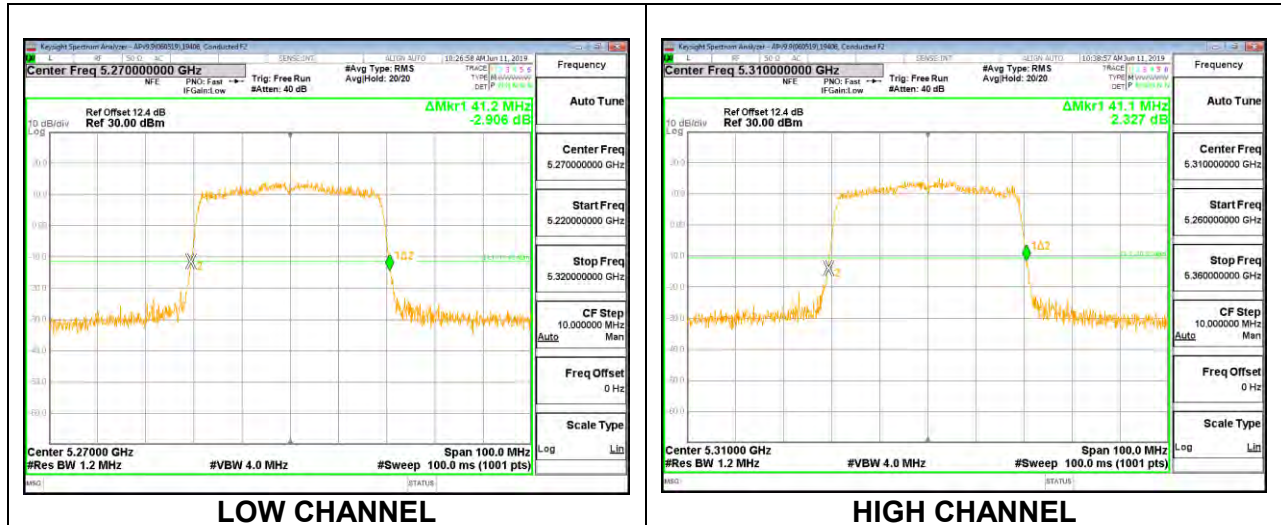
**1TX Antenna 5 MODE – 26 Tones, RU Index 0**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	21.70
High	5310	22.00

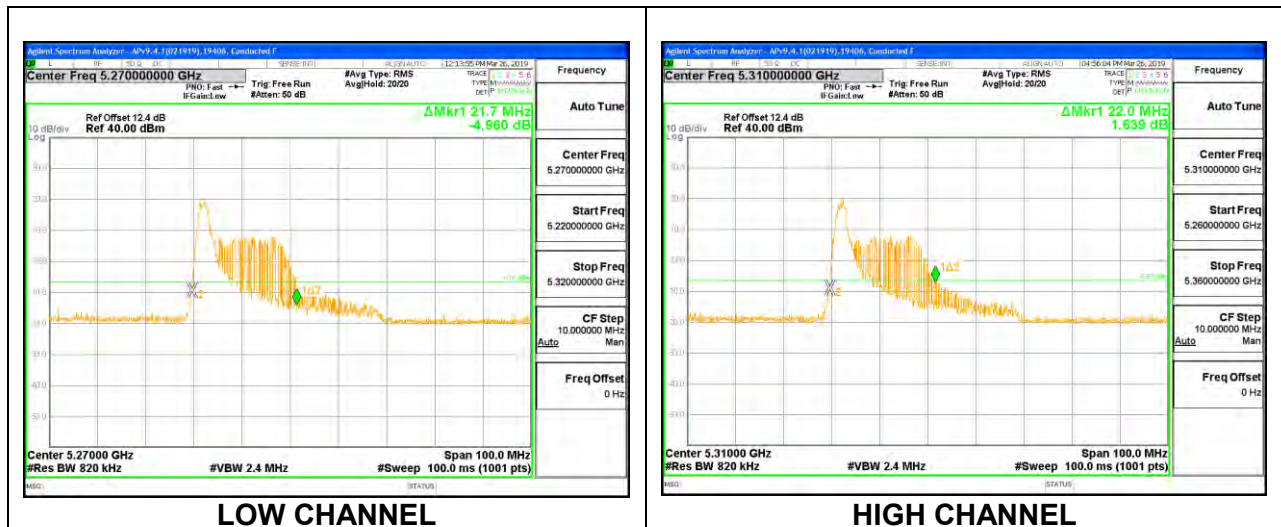


1TX Antenna 5 MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	25.80
High	5310	25.60




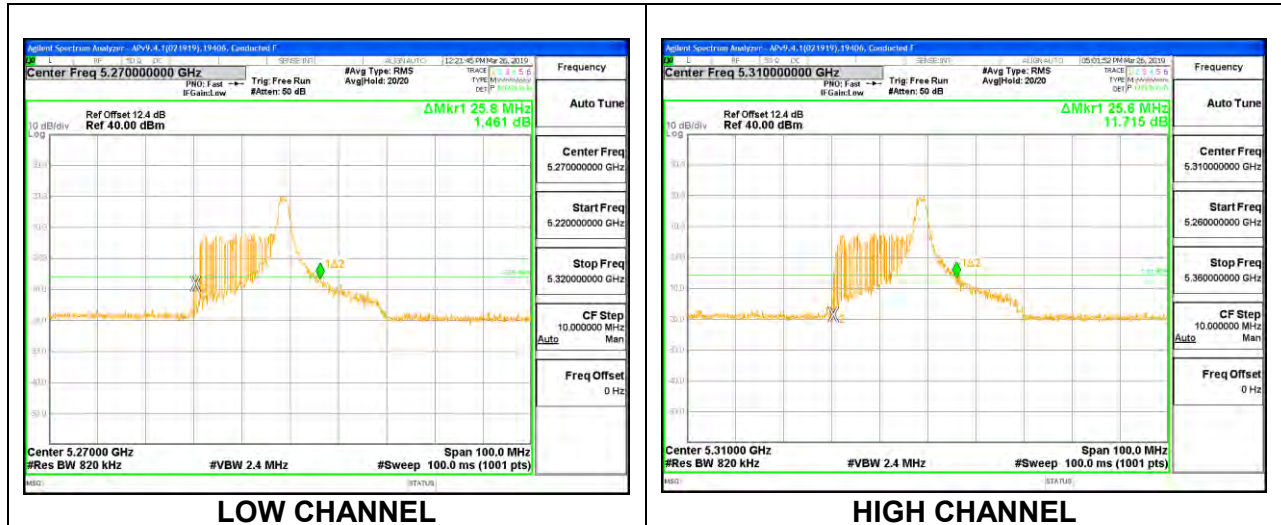
**1TX Antenna 5 MODE – 26 Tones, RU Index 17**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5270	22.70
High	5310	21.60

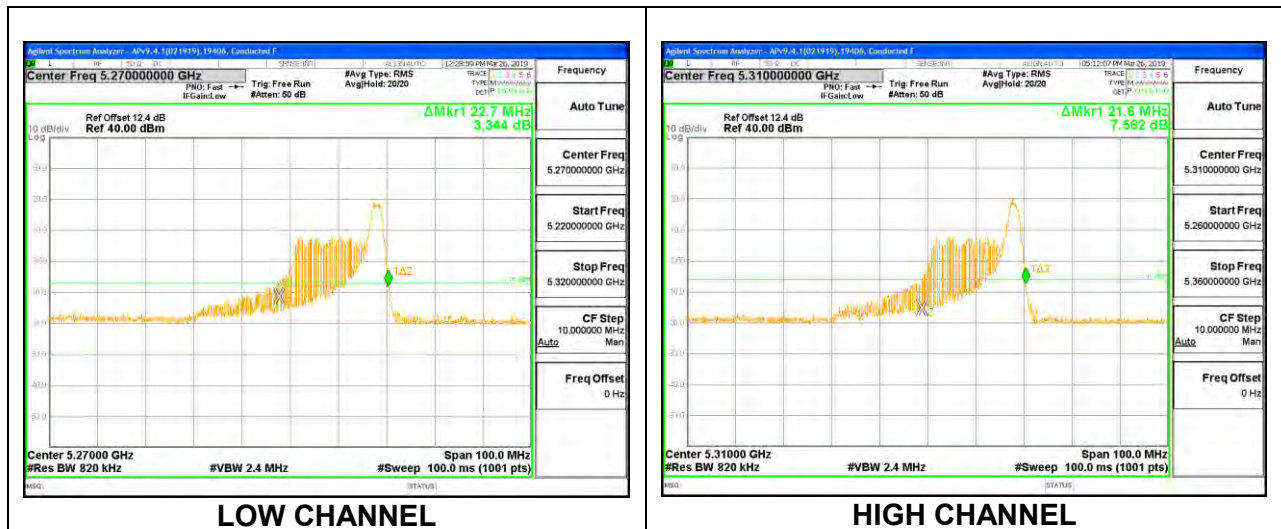

2TX Antenna 4 + Antenna 5 OFDMA MODE – 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5270	41.20	41.20
High	5310	41.20	41.20

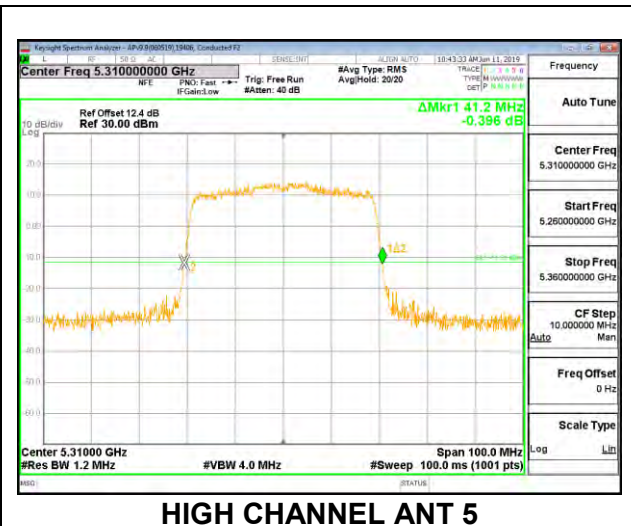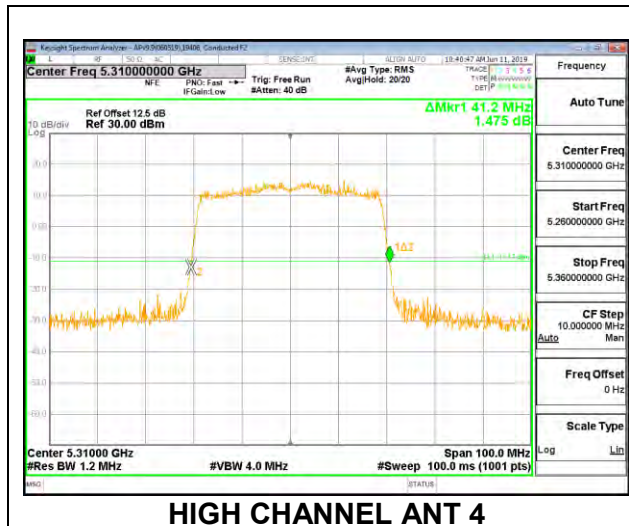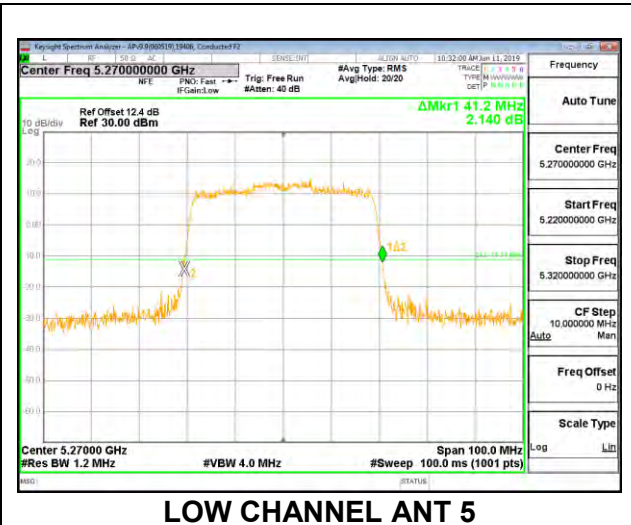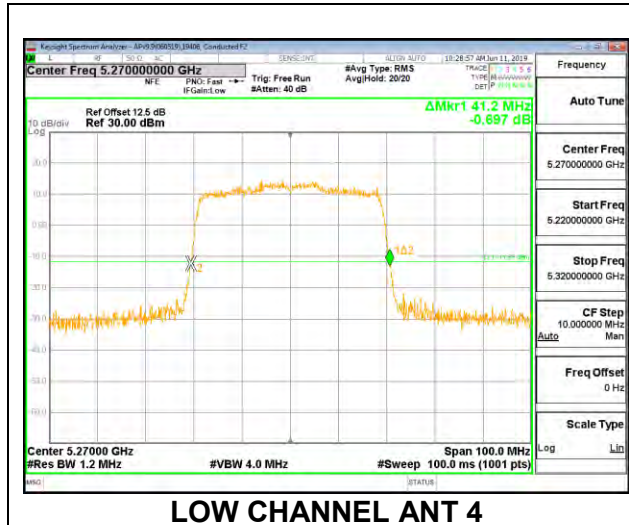

2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Ant 4 (MHz)	26 dB Bandwidth Ant 5 (MHz)
Low	5270	21.70	21.00
High	5310	22.80	20.60

