

8.3.19. 802.11n HT20 MODE IN THE 5.8 GHz BAND




1TX Antenna 6 MODE

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.835
Mid	5785	17.774
High	5825	17.748







1TX Antenna 5 MODE



Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.780
Mid	5785	17.779
High	5825	17.851

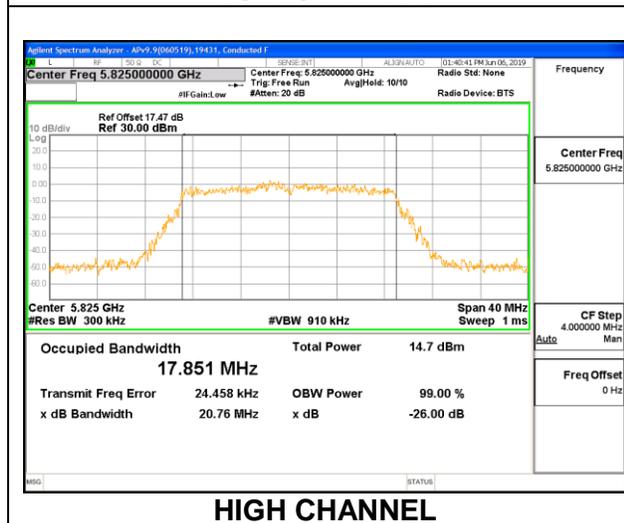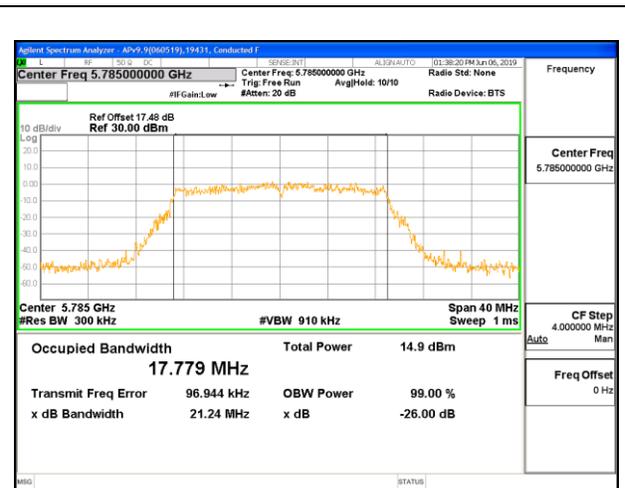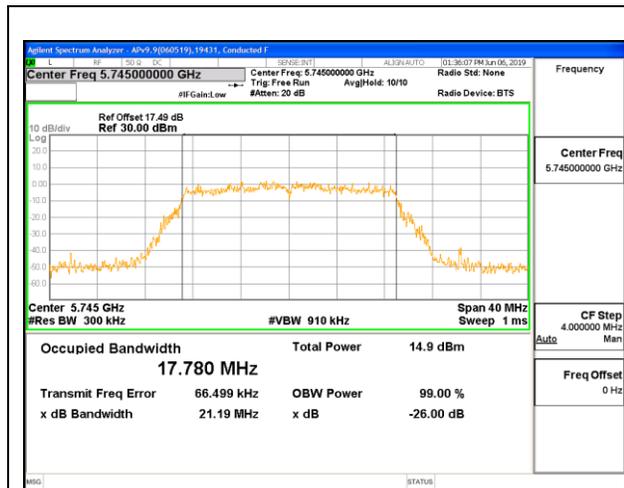

2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	17.723	17.793
Mid	5785	17.907	17.722
High	5825	17.835	17.781

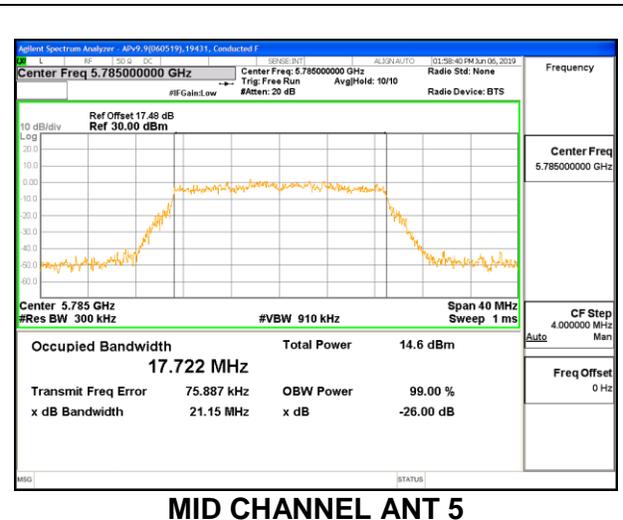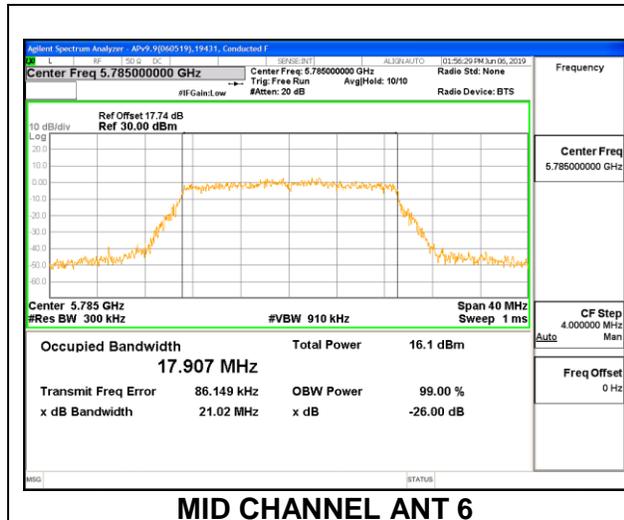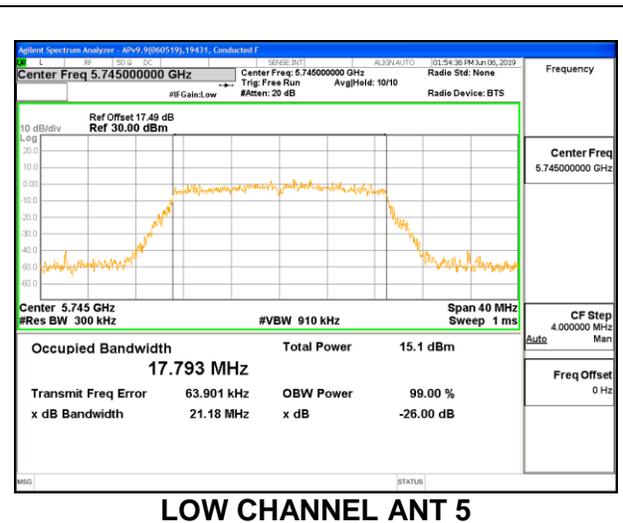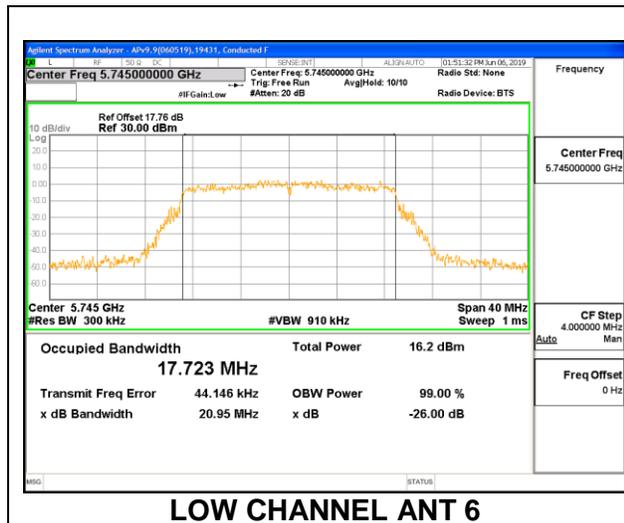


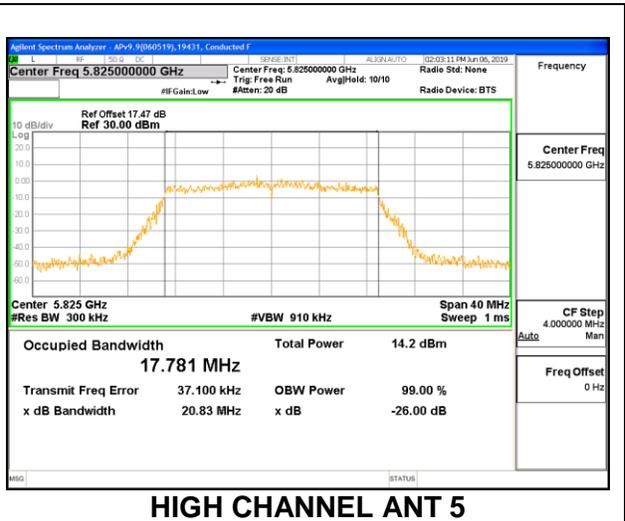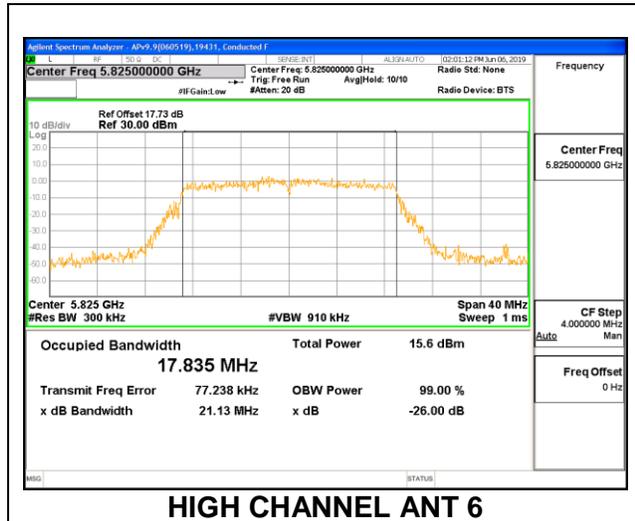

8.3.20. 802.11n HT40 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	35.996
High	5795	36.116

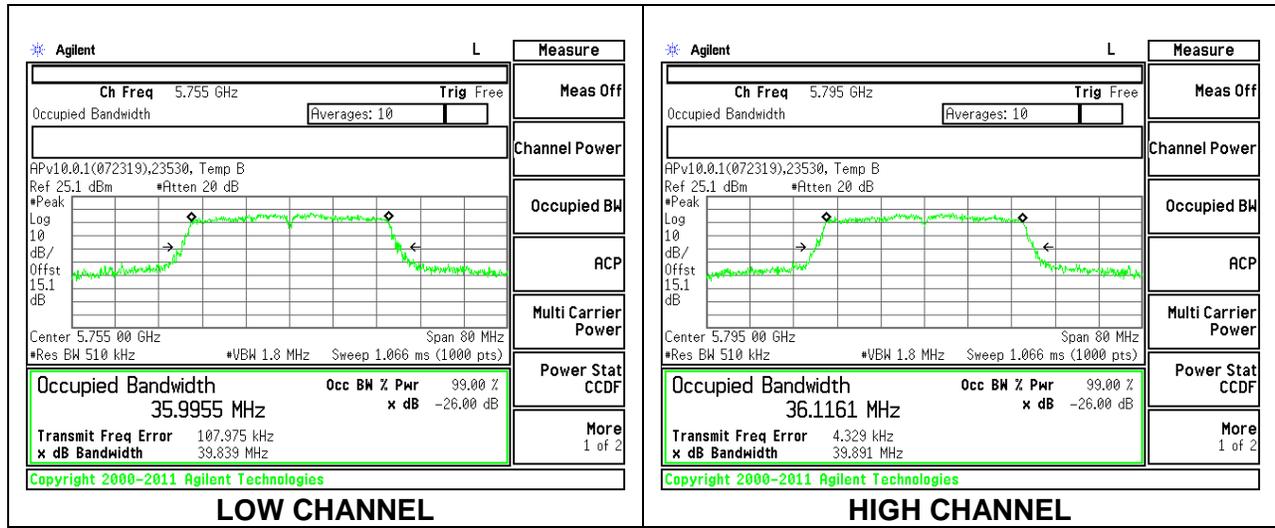





1TX Antenna 5 MODE

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	36.134
High	5795	36.103

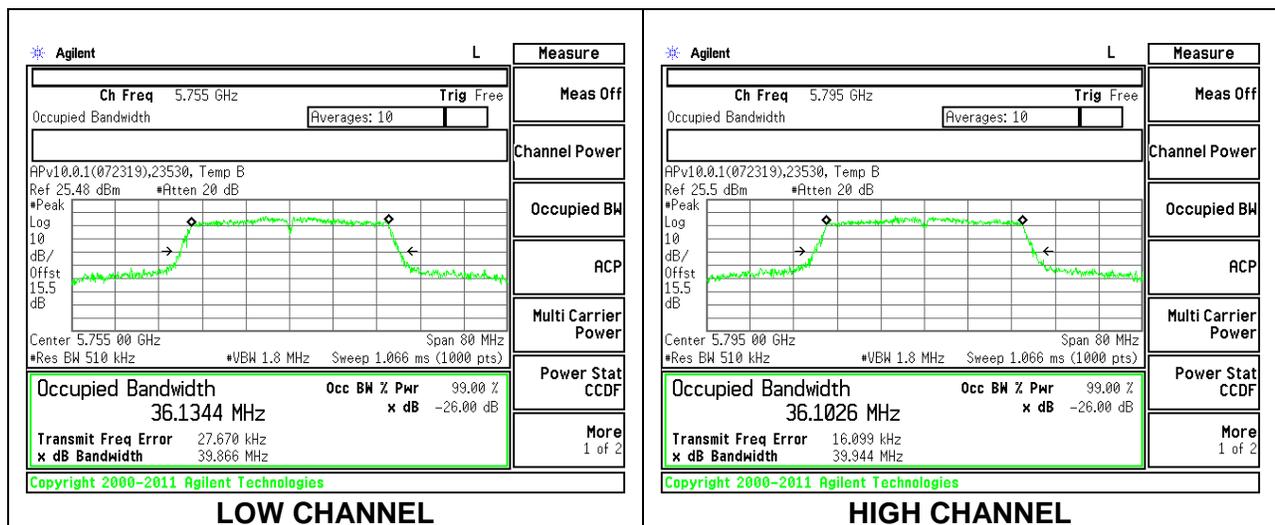

2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	36.060	36.203
High	5795	36.201	36.126

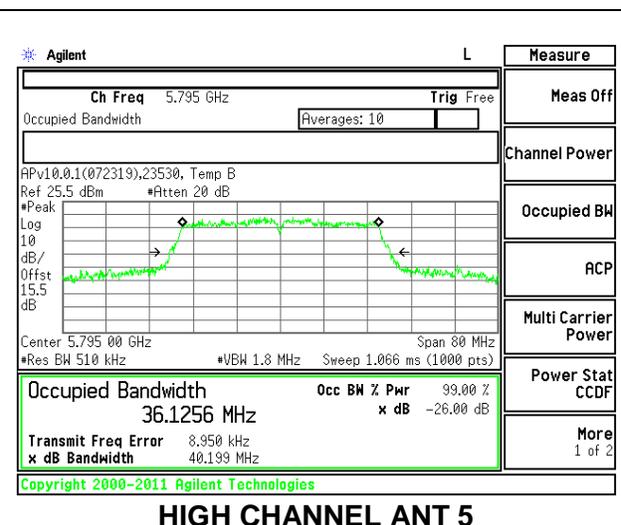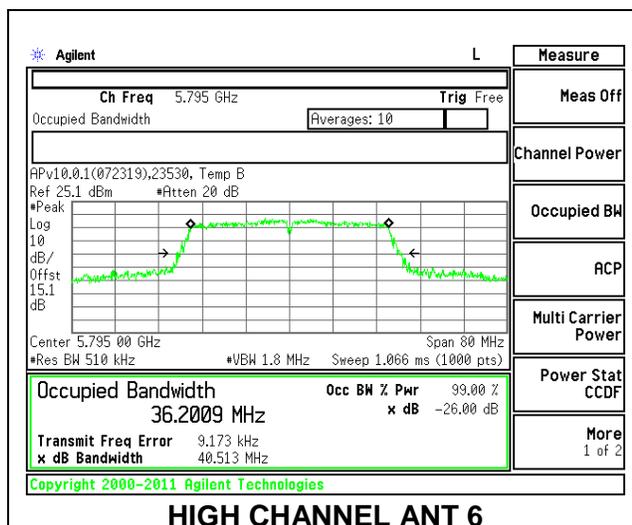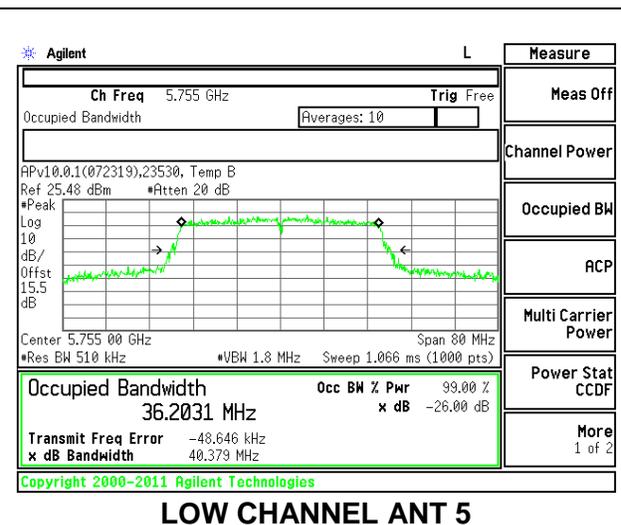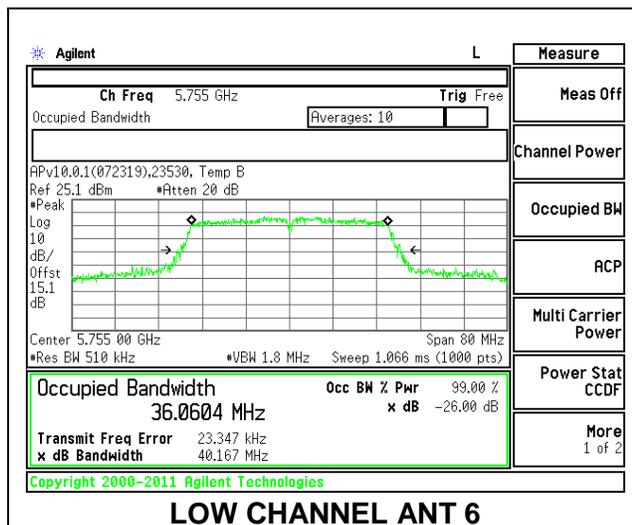

8.3.21. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5775	75.696

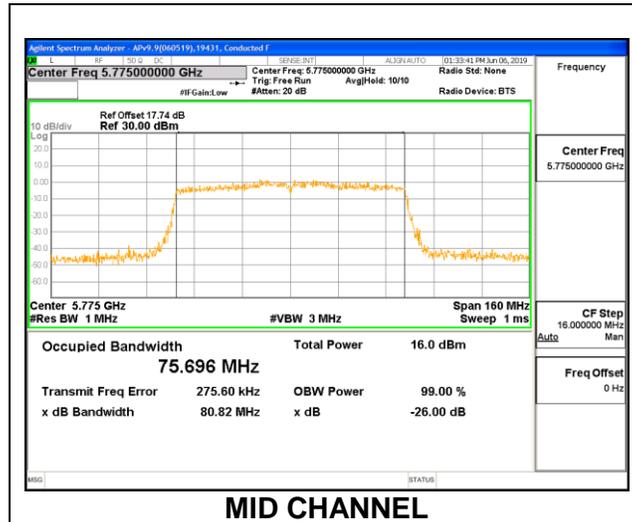



1TX Antenna 5 MODE

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5775	75.579

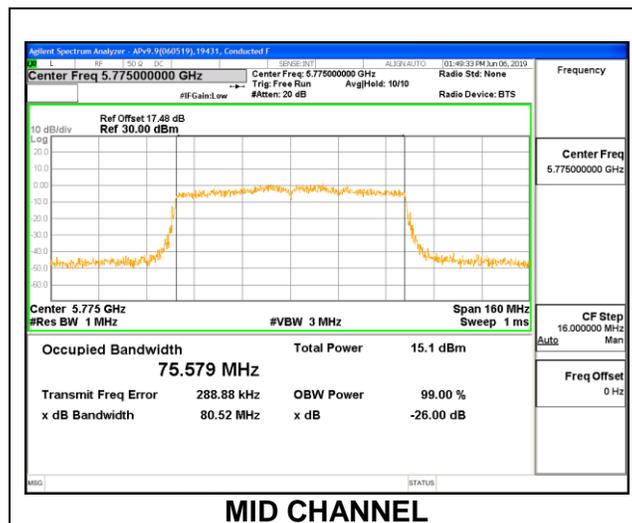

2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	75.648	75.875

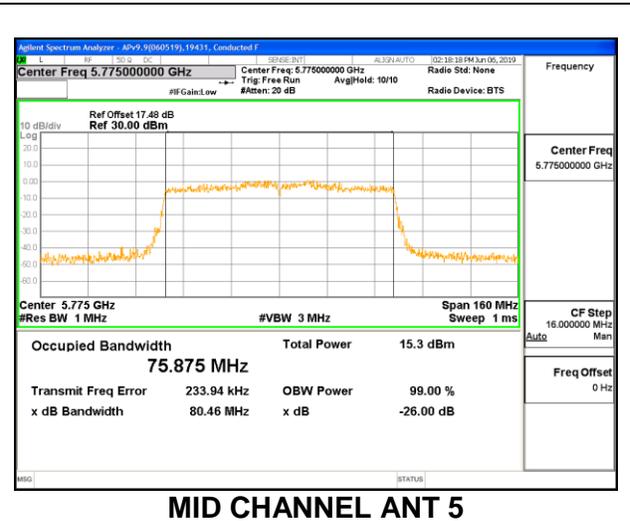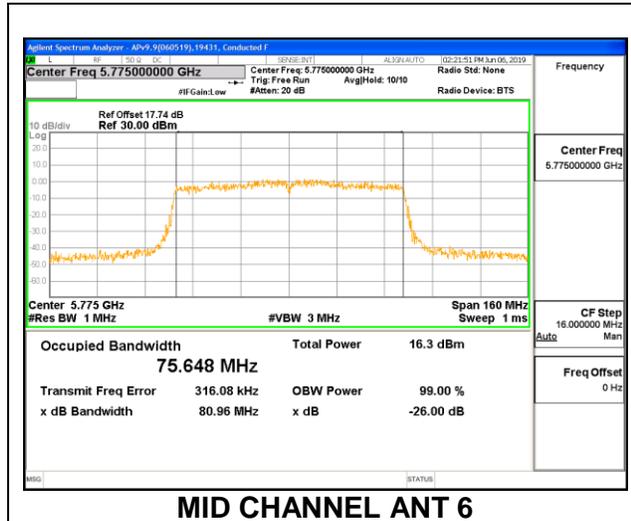


8.3.22. 802.11ax HE20 MODE IN THE 5.8 GHz BAND

1TX Antenna 6 MODE – 242-Tones, RU Index 61


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	18.991
Mid	5785	18.963
High	5825	18.961

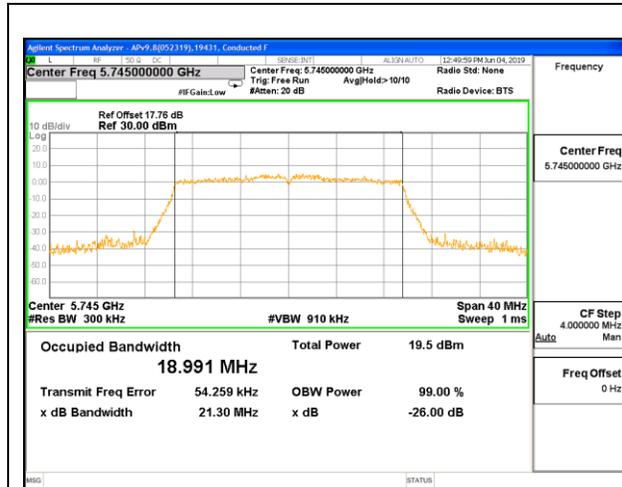

LOW CHANNEL

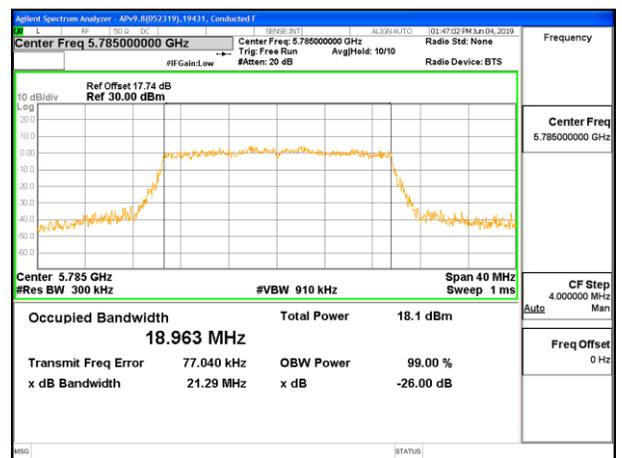




MID CHANNEL

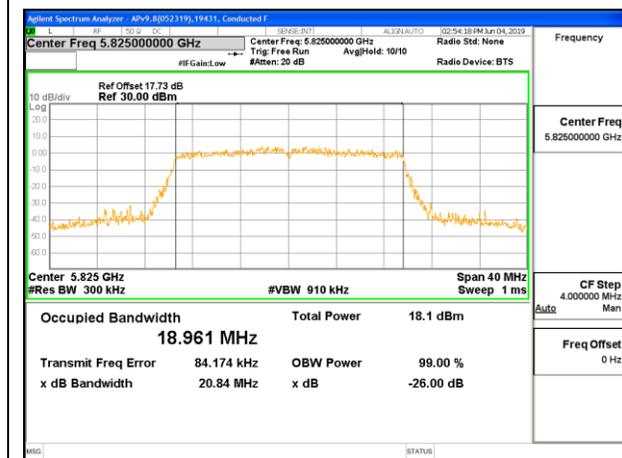

HIGH CHANNEL




1TX Antenna 6 MODE – 26-Tones, RU Index 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	18.242
Mid	5785	18.426
High	5825	18.393

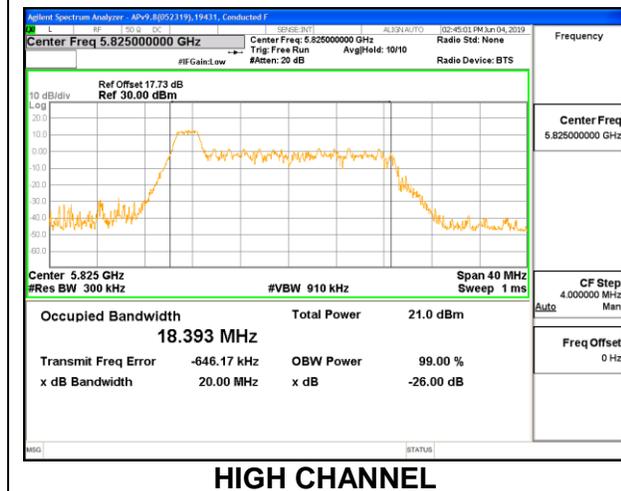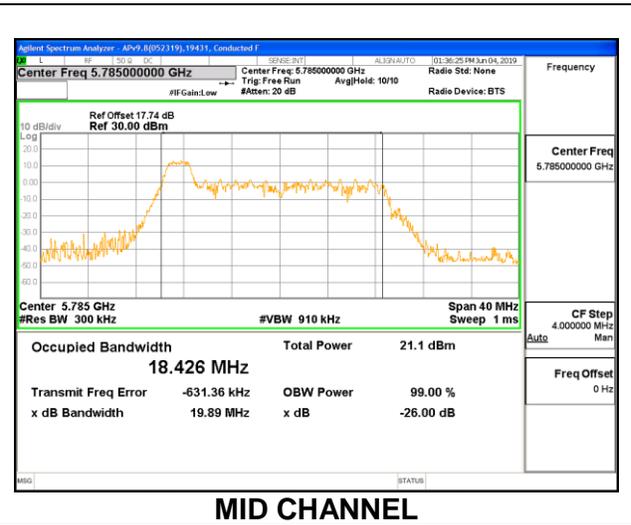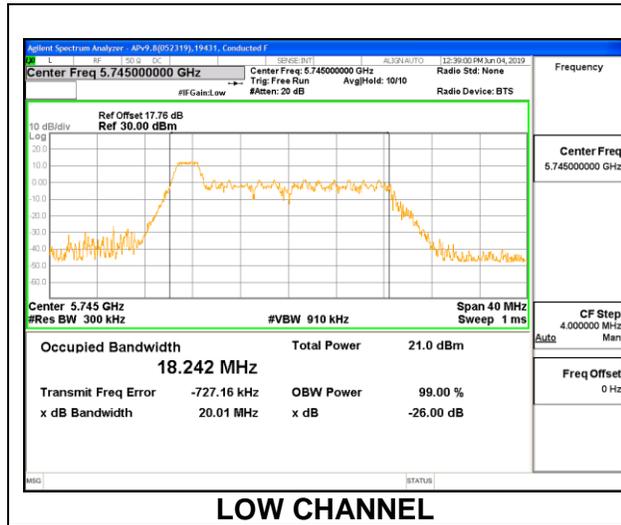


1TX Antenna 6 MODE – 26-Tones, RU Index 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.343
Mid	5785	17.202
High	5825	17.202

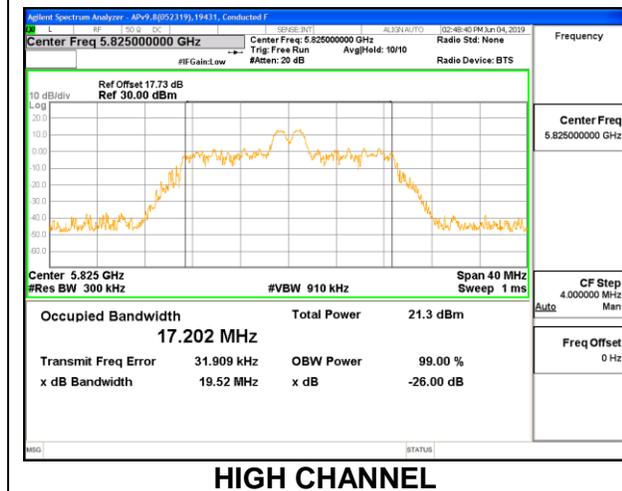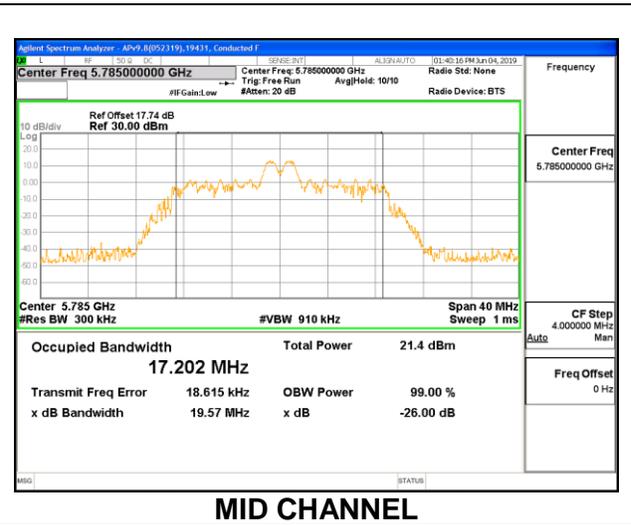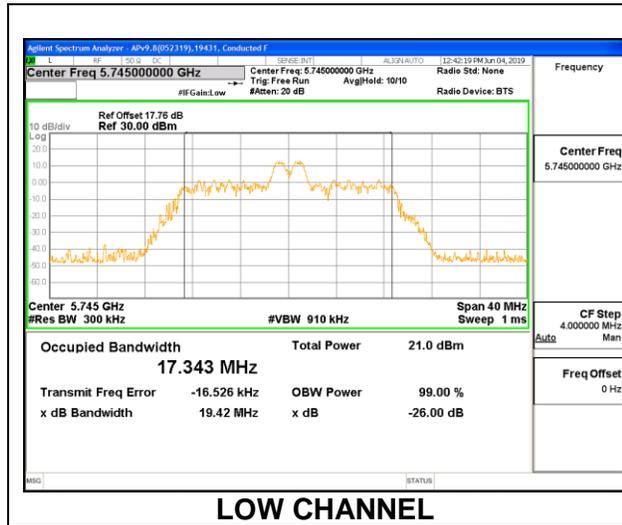




1TX Antenna 6 MODE – 26-Tones, RU Index 8

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	18.560
Mid	5785	18.630
High	5825	18.521

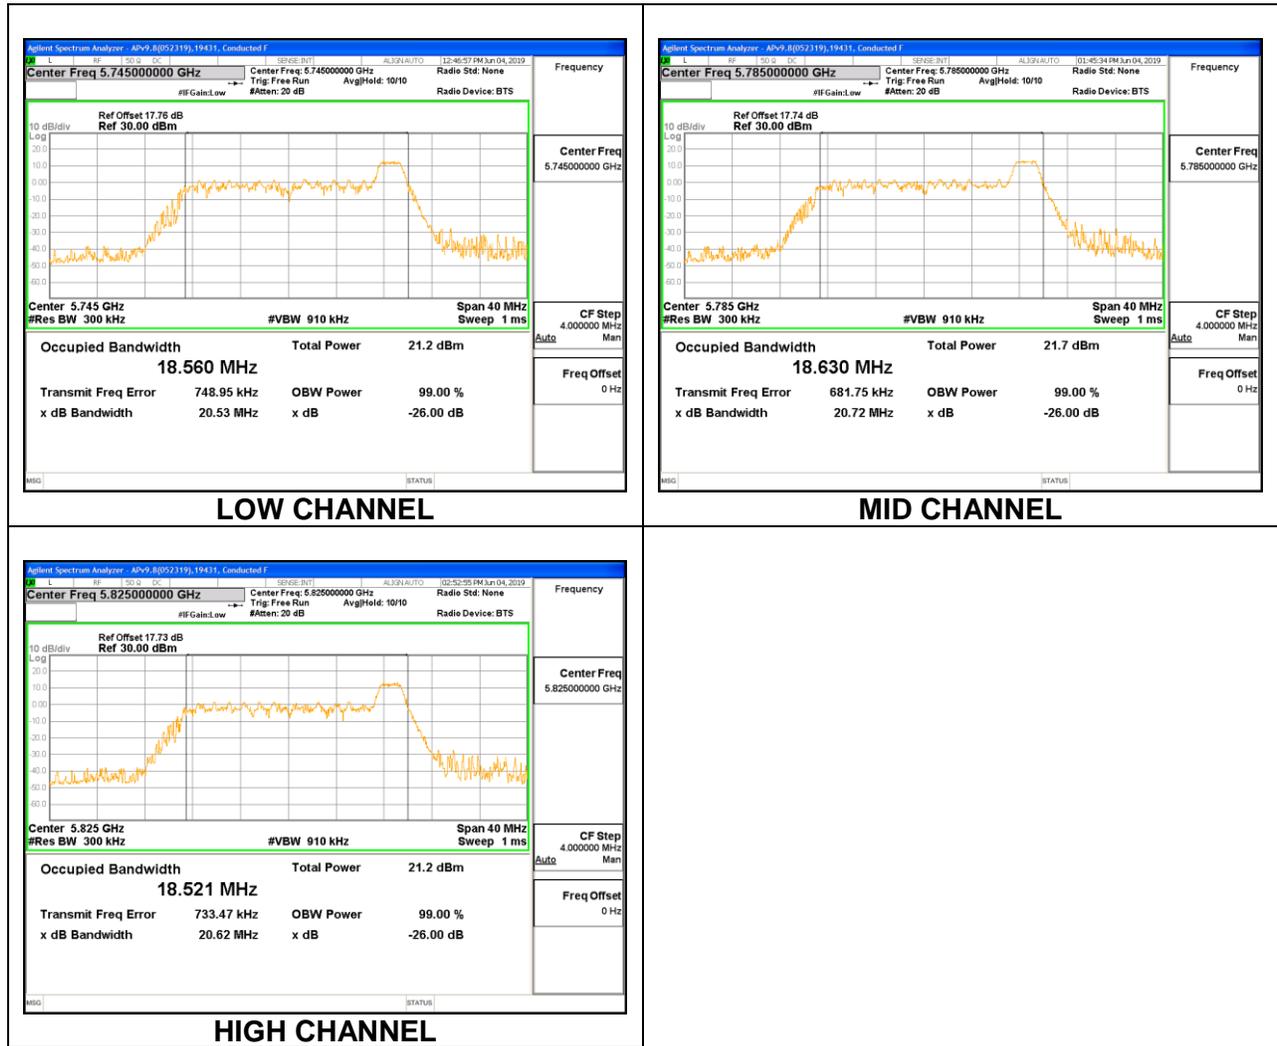

1TX Antenna 5 MODE – 242-Tones, RU Index 61

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	18.970
Mid	5785	18.982
High	5825	18.962

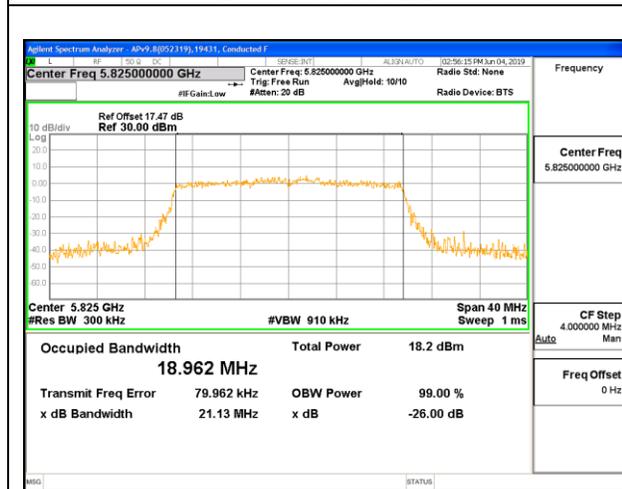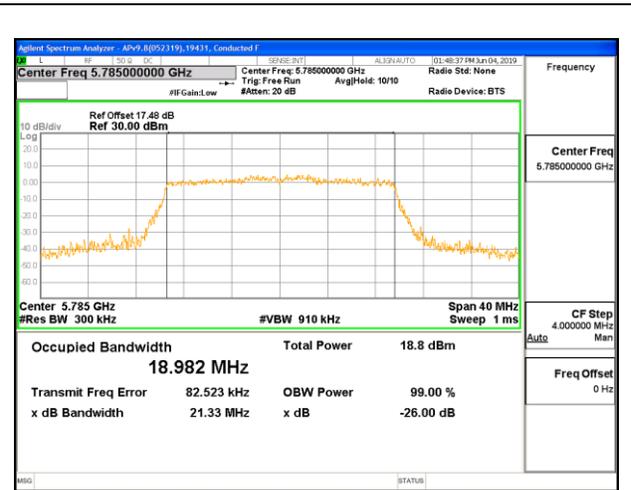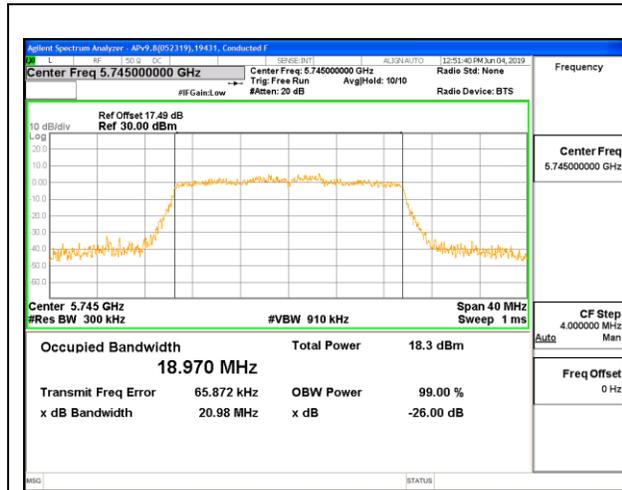




1TX Antenna 5 MODE – 26-Tones, RU Index 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	18.380
Mid	5785	18.487
High	5825	18.382



1TX Antenna 5 MODE – 26-Tones, RU Index 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.207
Mid	5785	17.228
High	5825	17.044

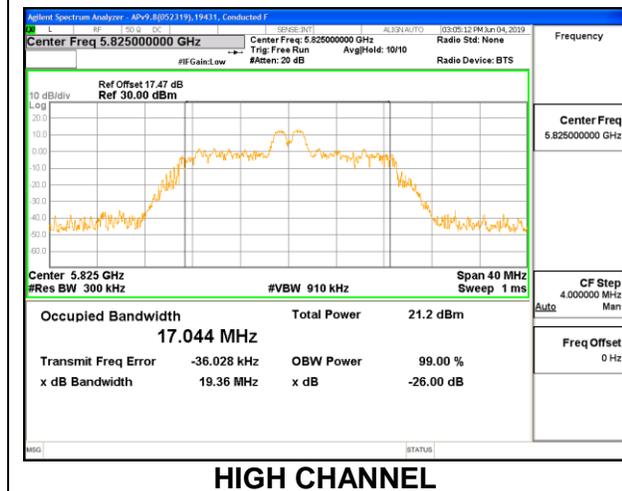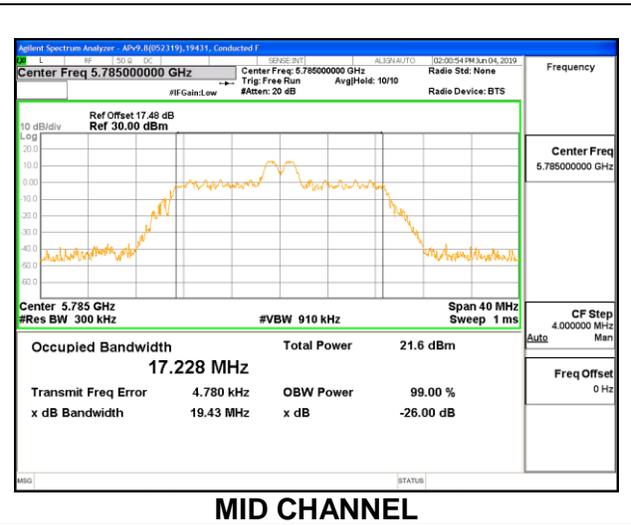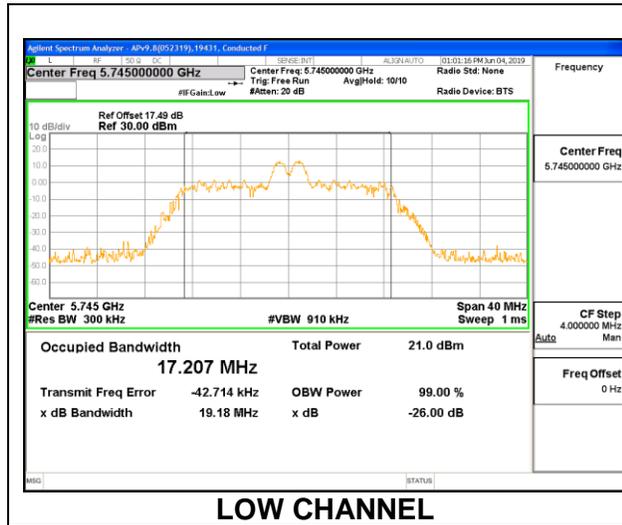





1TX Antenna 5 MODE – 26-Tones, RU Index 8



Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	18.542
Mid	5785	18.576
High	5825	18.642



2TX Antenna 6 + Antenna 5 OFDMA MODE – 242-Tones, RU Index 61

Channel	Frequency (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	18.957	18.967
Mid	5785	18.920	18.961
High	5825	18.932	18.952

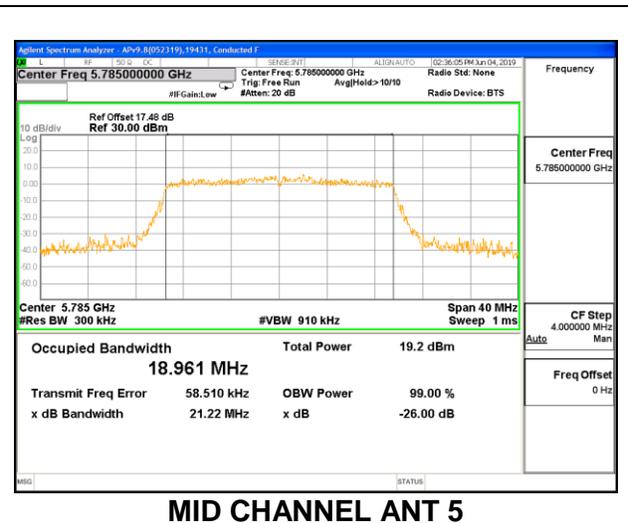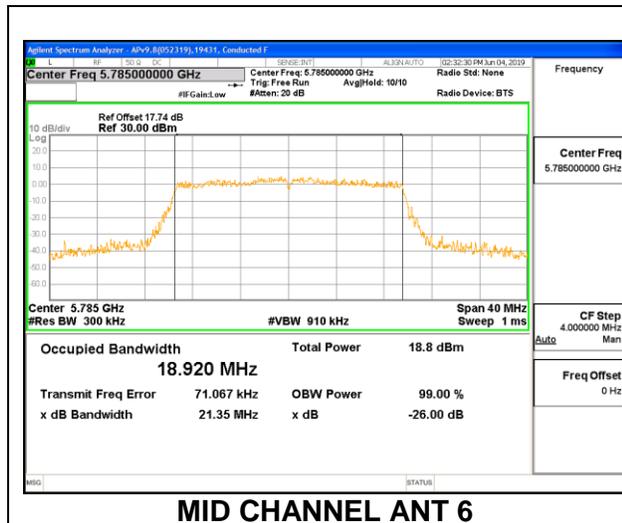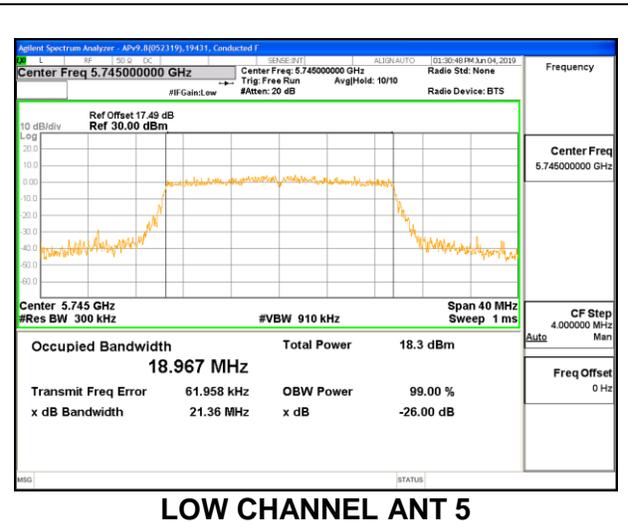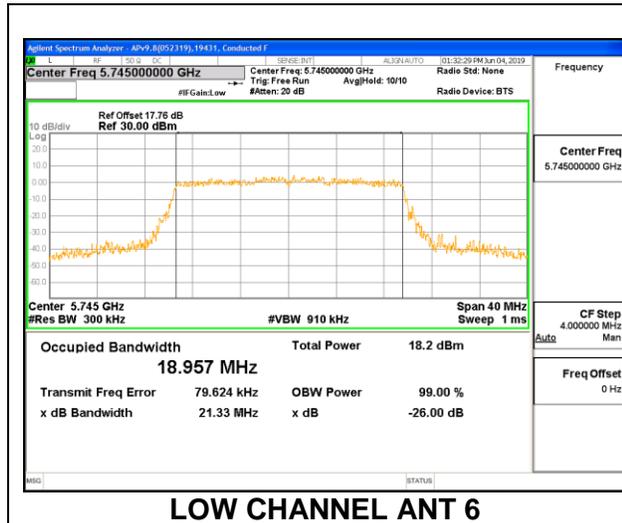

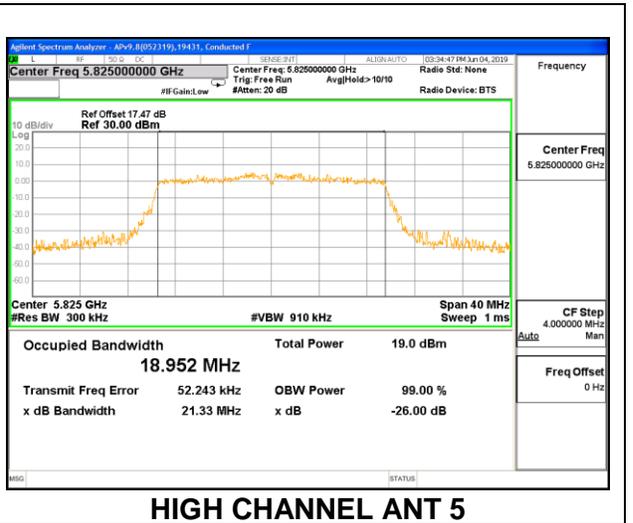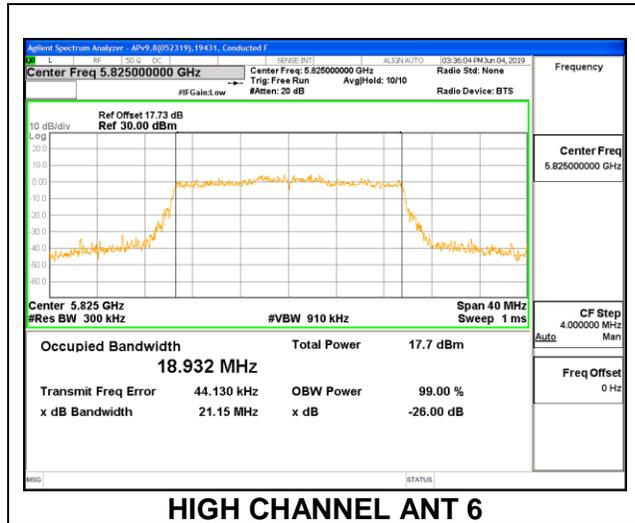

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26-Tones, RU Index 0

Frequency (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
5745	18.398	18.306
5785	18.468	18.380
5825	18.389	18.411

