

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 18**

Test Engineer:	44352
Test Date:	9/8/2020

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5530	38.40	-1.64	1.22	24.00	11.00
High	5610	38.20	-1.64	1.22	24.00	11.00
138	5690	38.40	-1.64	1.22	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	8.66	8.71	11.70	24.00	-12.30
High	5610	8.82	8.63	11.74	24.00	-12.26
138	5690	8.83	8.77	11.81	24.00	-12.19

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/1MHz)	Antenna 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5530	5.202	5.586	8.409	11.00	-2.591
High	5610	5.711	5.495	8.615	11.00	-2.385
138	5690	5.920	5.884	8.912	11.00	-2.088

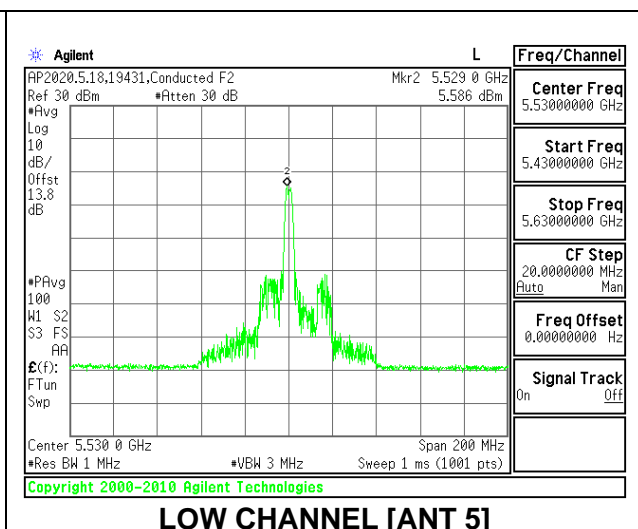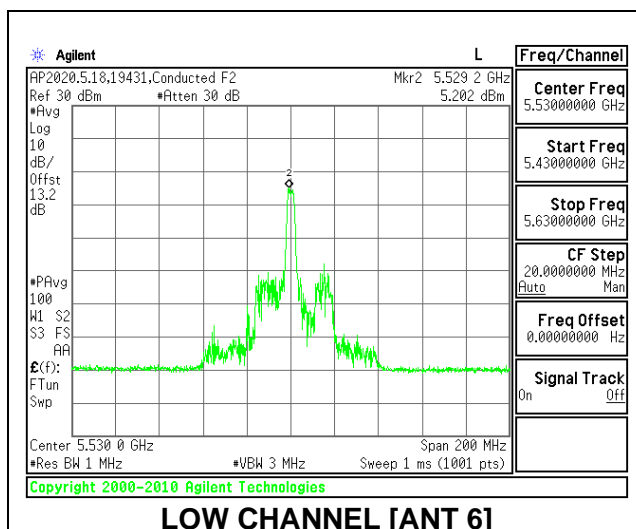

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 36**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5530	20.20	-1.64	1.22	24.00	11.00
High	5610	20.20	-1.64	1.22	24.00	11.00
138	5690	15.00	-1.64	1.22	22.76	11.00



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	8.88	8.81	11.86	24.00	-12.14
High	5610	8.93	8.71	11.83	24.00	-12.17
138	5690	8.85	8.73	11.80	22.76	-10.96

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/1MHz)	Antenna 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5530	6.424	6.372	9.408	11.00	-1.592
High	5610	6.546	6.009	9.296	11.00	-1.704
138	5690	6.428	6.204	9.328	11.00	-1.672

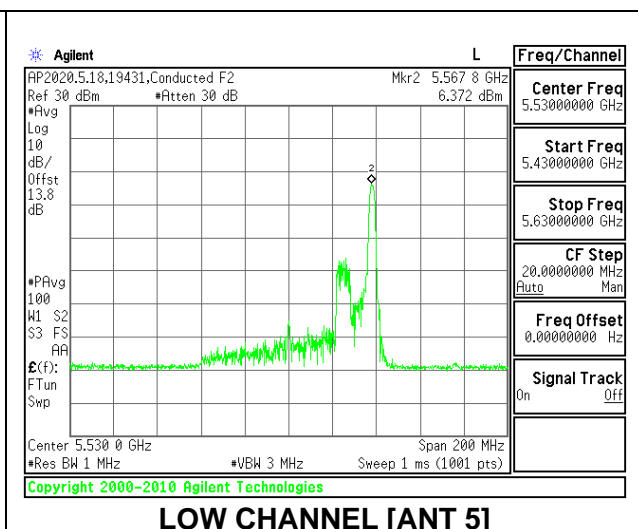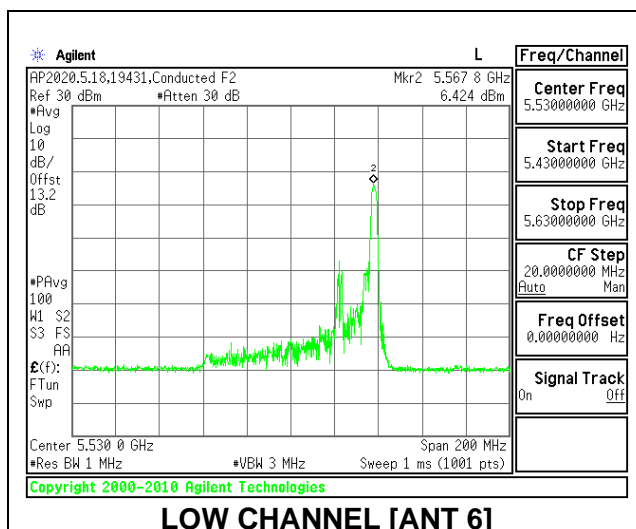

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 996 Tones, RU Index 67**

Test Engineer:	44352
Test Date:	9/8/2020

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5530	82.60	-1.64	1.22	24.00	11.00
High	5610	83.00	-1.64	1.22	24.00	11.00
138	5690	76.50	-1.64	1.22	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	12.87	12.79	15.84	24.00	-8.16
High	5610	18.23	19.87	22.14	24.00	-1.86
138	5690	18.16	19.76	22.04	24.00	-1.96

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/1MHz)	Antenna 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5530	-2.668	-2.405	0.476	11.00	-10.524
High	5610	1.475	3.721	5.752	11.00	-5.248
138	5690	1.239	3.811	5.723	11.00	-5.277

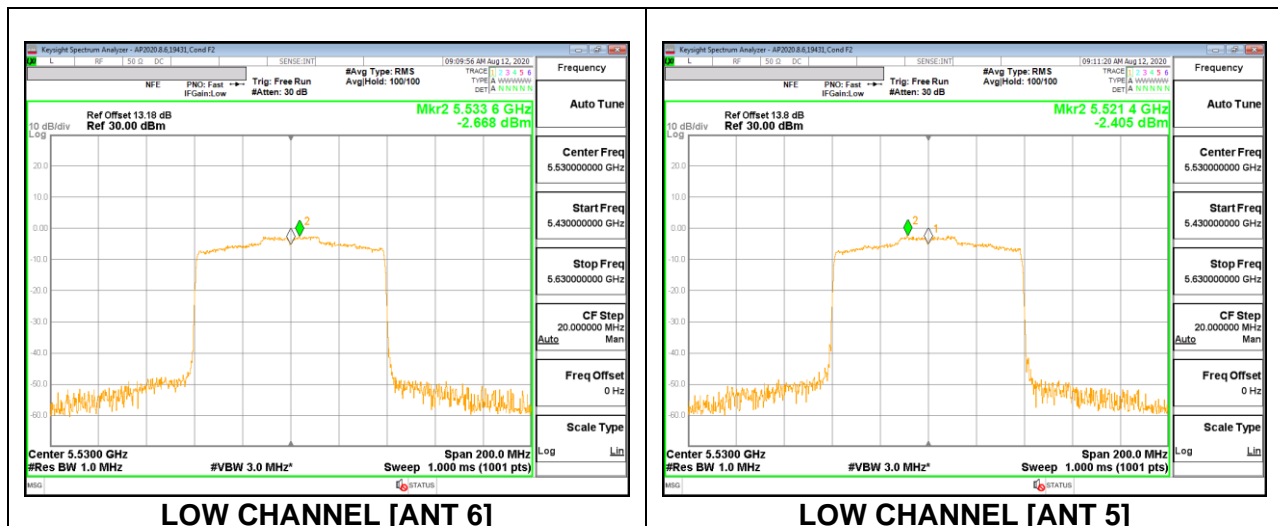

**8.4.19. 802.11n HT20 MODE IN THE 5.8 GHz BAND**

**1TX Antenna 6 MODE (FCC+IC)**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-1.00	30.00	30.00
Mid	5785	-1.00	30.00	30.00
High	5825	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.69	17.69	30.00	-12.31
Mid	5785	17.80	17.80	30.00	-12.20
High	5825	17.76	17.76	30.00	-12.24

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	4.902	4.902	30.00	-25.10
Mid	5785	5.133	5.133	30.00	-24.87
High	5825	5.148	5.148	30.00	-24.85

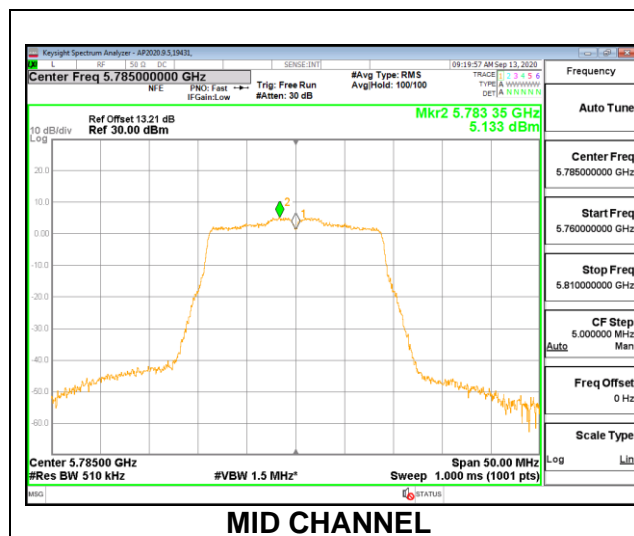

**1TX Antenna 5 MODE (FCC+IC)**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-3.30	30.00	30.00
Mid	5785	-3.30	30.00	30.00
High	5825	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	21.19	21.19	30.00	-8.81
Mid	5785	21.23	21.23	30.00	-8.77
High	5825	21.20	21.20	30.00	-8.80

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	6.917	6.917	30.00	-23.08
Mid	5785	7.073	7.073	30.00	-22.93
High	5825	6.934	6.934	30.00	-23.07

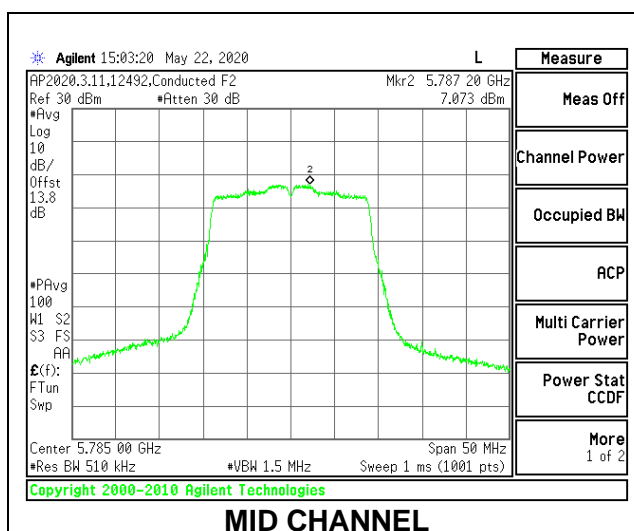

**2TX Antenna 6 + Antenna 5 CDD MODE (FCC+IC)**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-2.00	0.94	30.00	30.00
Mid	5785	-2.00	0.94	30.00	30.00
High	5825	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.89	21.23	22.88	30.00	-7.12
Mid	5785	17.99	21.32	22.98	30.00	-7.02
High	5825	17.88	21.19	22.85	30.00	-7.15

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	5.049	7.053	9.176	30.00	-20.824
Mid	5785	5.115	6.999	9.169	30.00	-20.831
High	5825	5.055	7.290	9.325	30.00	-20.675

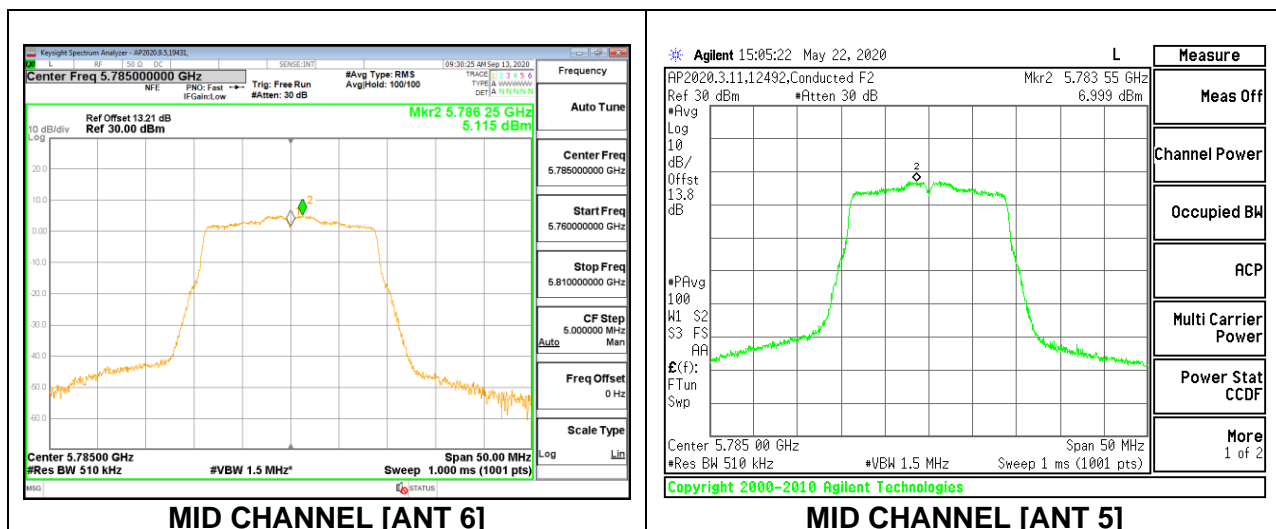

**8.4.20. 802.11n HT40 MODE IN THE 5.8 GHz BAND**

**1TX Antenna 6 MODE (FCC+IC)**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-1.00	30.00	30.00
High	5795	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.69	17.69	30.00	-12.31
High	5795	17.77	17.77	30.00	-12.23

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	2.116	2.206	30.00	-27.79
High	5795	1.923	2.013	30.00	-27.99

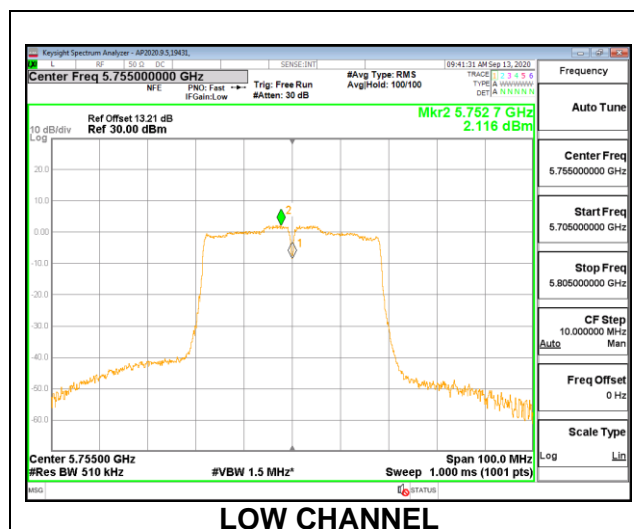

**1TX Antenna 5 MODE (FCC+IC)**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-3.30	30.00	30.00
High	5795	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	20.88	20.88	30.00	-9.12
High	5795	20.95	20.95	30.00	-9.05

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	4.562	4.652	30.00	-25.35
High	5795	4.707	4.797	30.00	-25.20

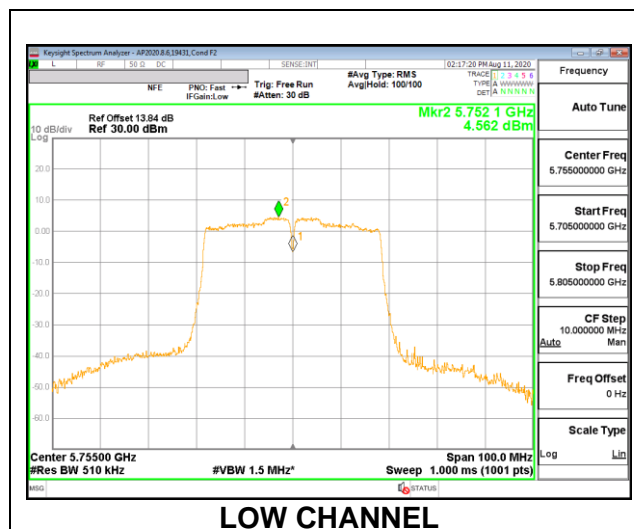



**2TX Antenna 6 + Antenna 5 CDD MODE (FCC+IC)**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-2.00	0.94	30.00	30.00
High	5795	-2.00	0.94	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.89	20.81	22.60	30.00	-7.40
High	5795	17.82	20.79	22.56	30.00	-7.44

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	1.791	3.995	6.132	30.00	-23.868
High	5795	1.974	3.890	6.137	30.00	-23.863

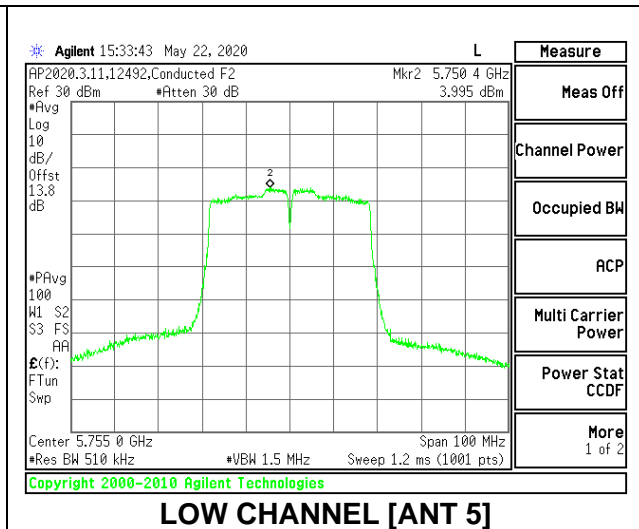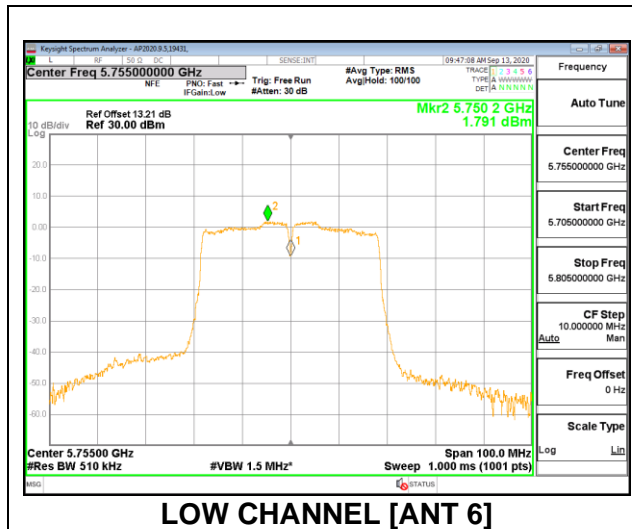

**8.4.21. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND**

**1TX Antenna 6 MODE (FCC+IC)**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.19	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.900	17.900	30.00	-12.10

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	-0.857	-0.667	30.00	-30.67

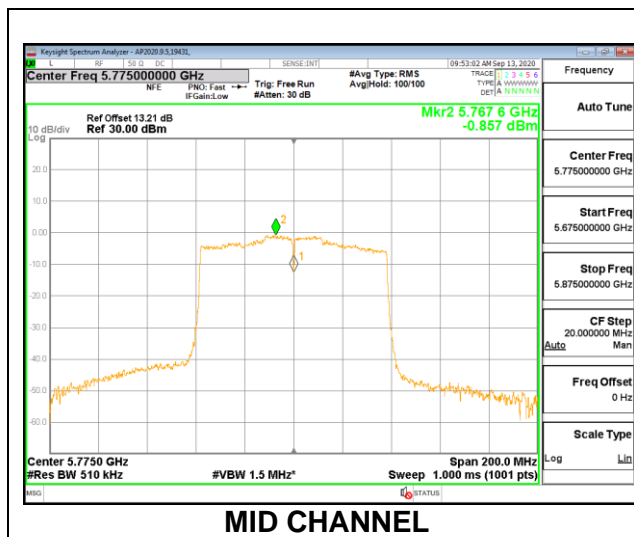

**1TX Antenna 5 MODE (FCC+IC)**

Test Engineer:	44352
Test Date:	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-3.30	30.00	30.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	20.44	20.44	30.00	-9.56

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	1.571	1.761	30.00	-28.24

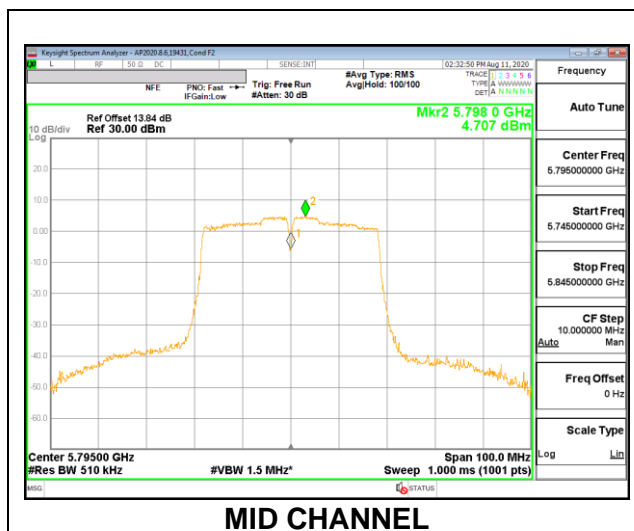

**2TX Antenna 6 + Antenna 5 CDD MODE (FCC+IC)**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.19	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.69	20.47	22.31	30.00	-7.69

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	-0.825	1.394	3.625	30.00	-26.375

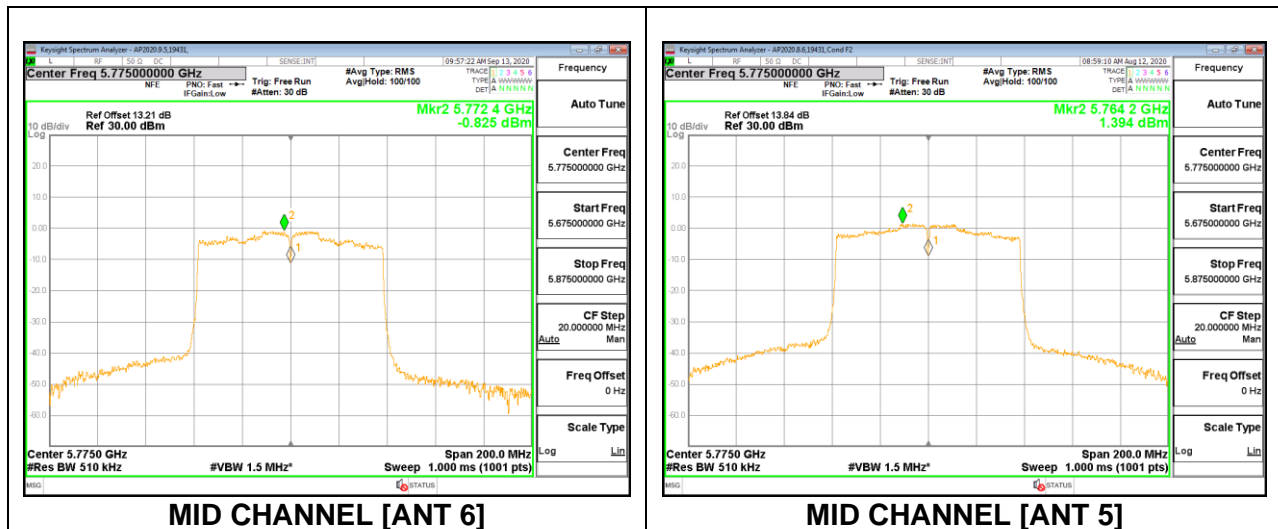

**8.4.22. 802.11ax HE20 MODE IN THE 5.8 GHz BAND**

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 0**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-1.00	30.00	30.00
Mid	5785	-1.00	30.00	30.00
High	5825	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.78	17.78	30.00	-12.22
Mid	5785	17.85	17.85	30.00	-12.15
High	5825	17.69	17.69	30.00	-12.31

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	12.762	12.762	30.00	-17.24
Mid	5785	12.820	12.820	30.00	-17.18
High	5825	12.644	12.644	30.00	-17.36

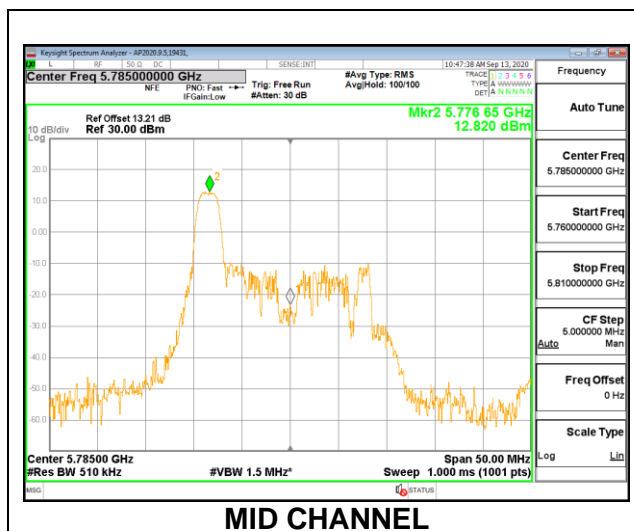

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 4**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-1.00	30.00	30.00
Mid	5785	-1.00	30.00	30.00
High	5825	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.64	17.64	30.00	-12.36
Mid	5785	17.85	17.85	30.00	-12.15
High	5825	17.76	17.76	30.00	-12.24

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	12.579	12.579	30.00	-17.42
Mid	5785	12.578	12.578	30.00	-17.42
High	5825	12.342	12.342	30.00	-17.66

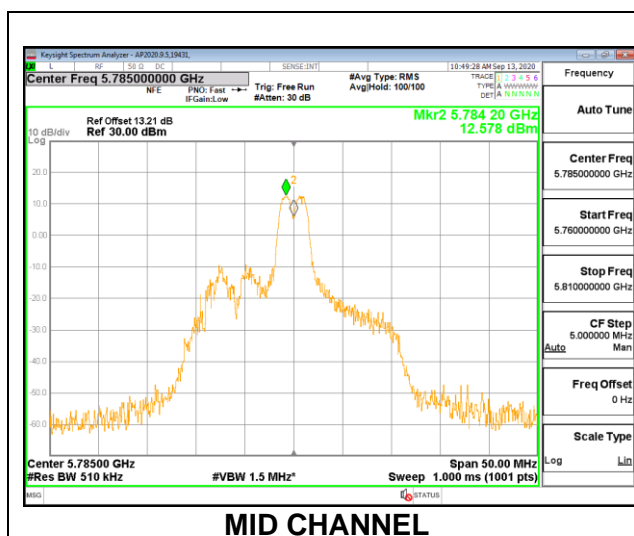

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 8**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-1.00	30.00	30.00
Mid	5785	-1.00	30.00	30.00
High	5825	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.89	17.89	30.00	-12.11
Mid	5785	17.92	17.92	30.00	-12.08
High	5825	17.82	17.82	30.00	-12.18

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	12.791	12.791	30.00	-17.21
Mid	5785	12.646	12.646	30.00	-17.35
High	5825	12.848	12.848	30.00	-17.15

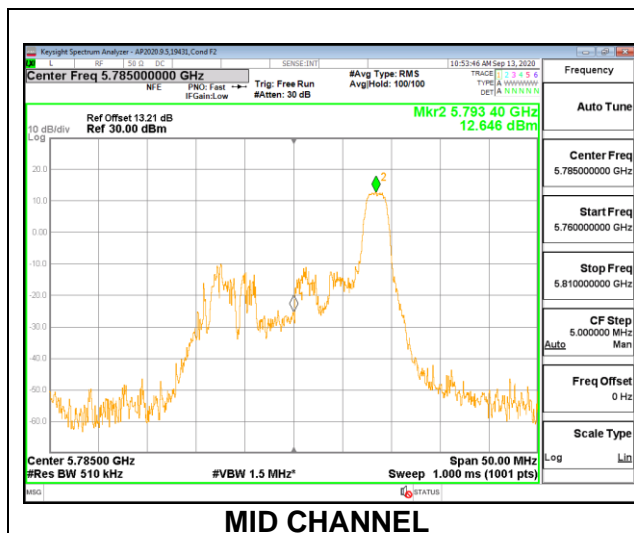

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 242 Tones, RU Index 61**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-1.00	30.00	30.00
Mid	5785	-1.00	30.00	30.00
High	5825	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.78	17.78	30.00	-12.22
Mid	5785	17.88	17.88	30.00	-12.12
High	5825	17.80	17.80	30.00	-12.20

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	3.785	3.785	30.00	-26.22
Mid	5785	3.788	3.788	30.00	-26.21
High	5825	3.822	3.822	30.00	-26.18

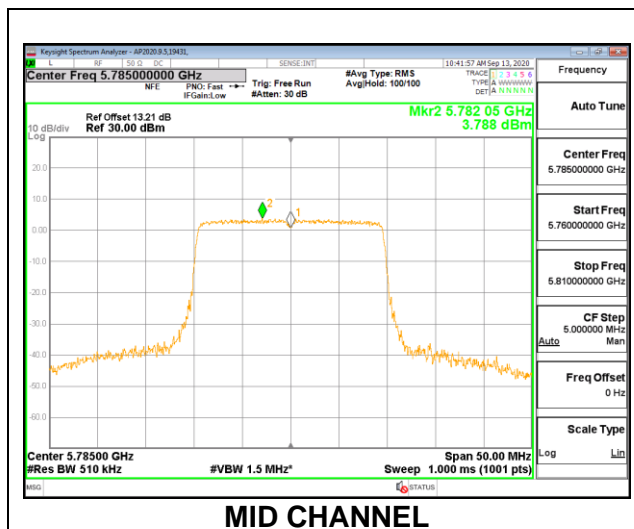



**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 0**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-3.30	30.00	30.00
Mid	5785	-3.30	30.00	30.00
High	5825	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	21.23	21.23	30.00	-8.77
Mid	5785	21.40	21.40	30.00	-8.60
High	5825	21.35	21.35	30.00	-8.65

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	14.632	14.632	30.00	-15.37
Mid	5785	14.790	14.790	30.00	-15.21
High	5825	15.071	15.071	30.00	-14.93

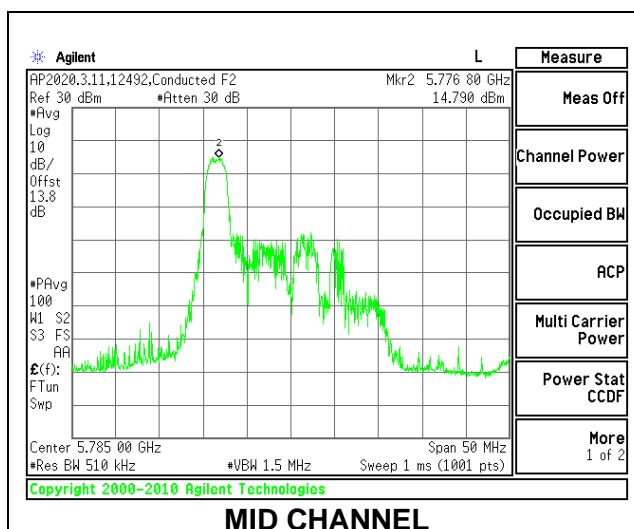

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 4**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-3.30	30.00	30.00
Mid	5785	-3.30	30.00	30.00
High	5825	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	21.31	21.31	30.00	-8.69
Mid	5785	21.24	21.24	30.00	-8.76
High	5825	21.27	21.27	30.00	-8.73

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	14.574	14.574	30.00	-15.43
Mid	5785	14.217	14.217	30.00	-15.78
High	5825	14.409	14.409	30.00	-15.59

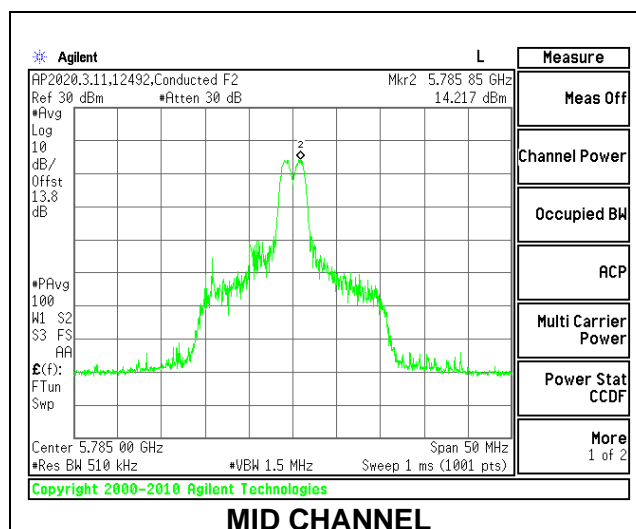

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 8**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-3.30	30.00	30.00
Mid	5785	-3.30	30.00	30.00
High	5825	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	21.35	21.350	30.00	-8.65
Mid	5785	21.41	21.410	30.00	-8.59
High	5825	21.44	21.440	30.00	-8.56

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	14.535	14.535	30.00	-15.47
Mid	5785	14.872	14.872	30.00	-15.13
High	5825	15.035	15.035	30.00	-14.97

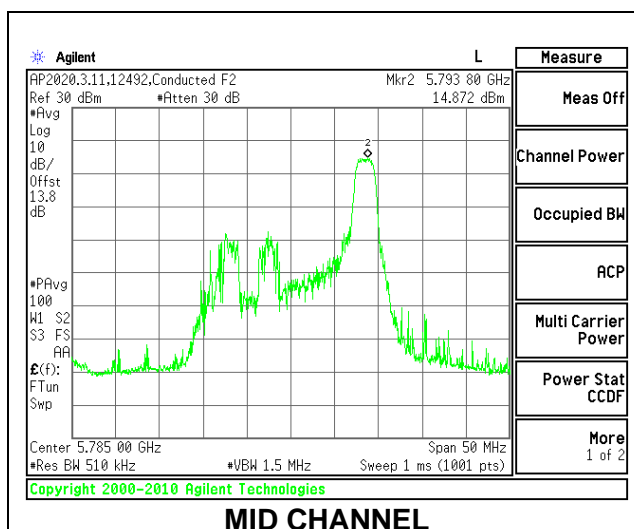

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 242 Tones, RU Index 61**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-3.30	30.00	30.00
Mid	5785	-3.30	30.00	30.00
High	5825	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	21.18	21.18	30.00	-8.82
Mid	5785	21.37	21.37	30.00	-8.63
High	5825	21.22	21.22	30.00	-8.78

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	6.829	6.829	30.00	-23.17
Mid	5785	6.976	6.976	30.00	-23.02
High	5825	6.995	6.995	30.00	-23.01

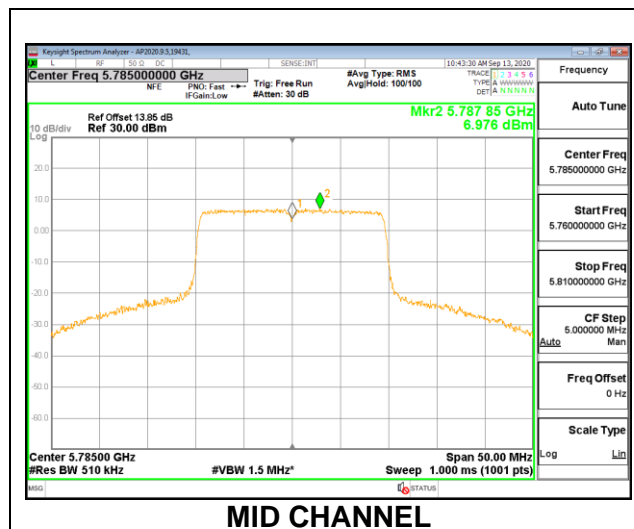

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 26 Tones, RU Index 0**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-2.00	0.94	30.00	30.00
Mid	5785	-2.00	0.94	30.00	30.00
High	5825	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.69	21.19	22.79	30.00	-7.21
Mid	5785	17.80	21.42	22.99	30.00	-7.01
High	5825	17.77	21.23	22.85	30.00	-7.15

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	12.640	14.685	16.792	30.00	-13.208
Mid	5785	12.813	14.799	16.929	30.00	-13.071
High	5825	12.831	14.709	16.881	30.00	-13.119

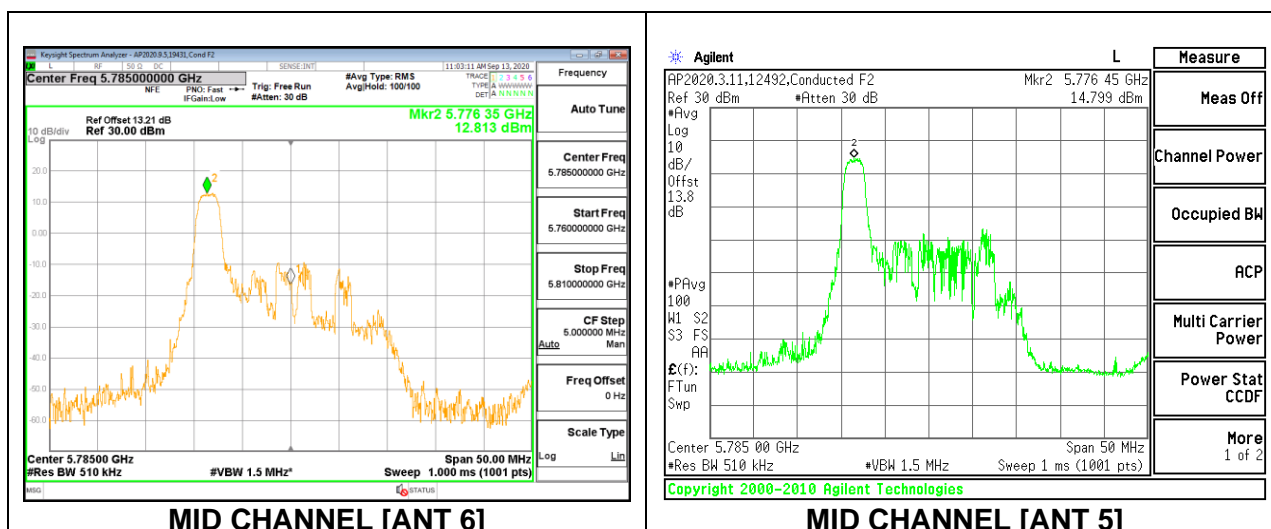

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 26 Tones, RU Index 4**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-2.00	0.94	30.00	30.00
Mid	5785	-2.00	0.94	30.00	30.00
High	5825	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.73	21.23	22.83	30.00	-7.17
Mid	5785	17.85	21.35	22.95	30.00	-7.05
High	5825	17.79	21.29	22.89	30.00	-7.11

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	12.686	14.666	16.798	30.00	-13.202
Mid	5785	12.730	14.217	16.547	30.00	-13.453
High	5825	12.708	14.170	16.511	30.00	-13.489

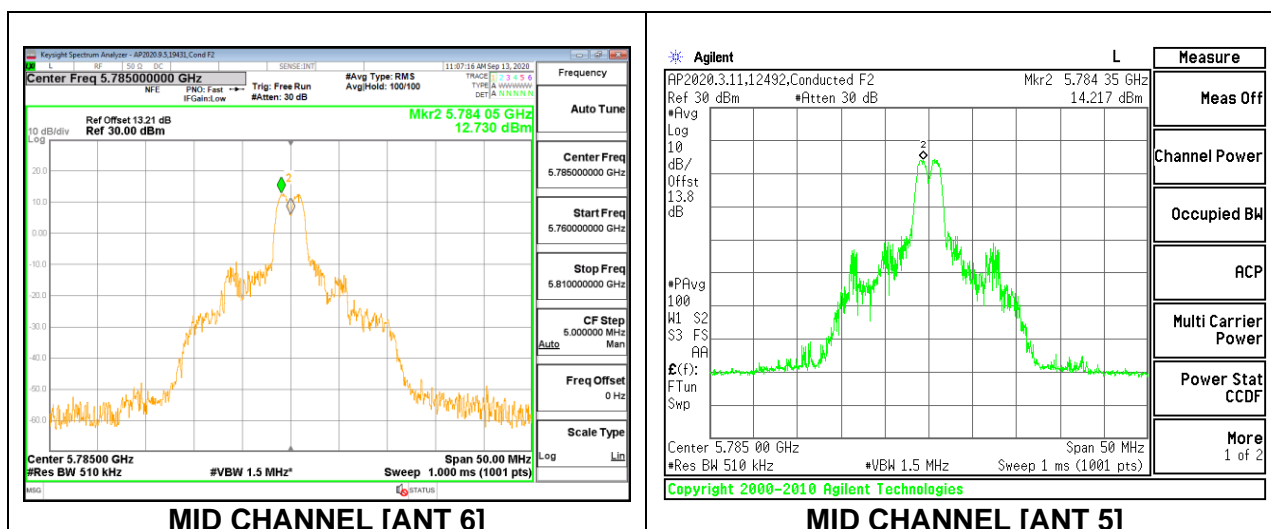

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 26 Tones, RU Index 8**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-2.00	0.94	30.00	30.00
Mid	5785	-2.00	0.94	30.00	30.00
High	5825	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.71	21.15	22.77	30.00	-7.23
Mid	5785	17.86	21.43	23.01	30.00	-6.99
High	5825	17.78	21.33	22.92	30.00	-7.08

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	12.916	14.746	16.937	30.00	-13.063
Mid	5785	12.742	14.784	16.892	30.00	-13.108
High	5825	12.701	14.742	16.851	30.00	-13.149

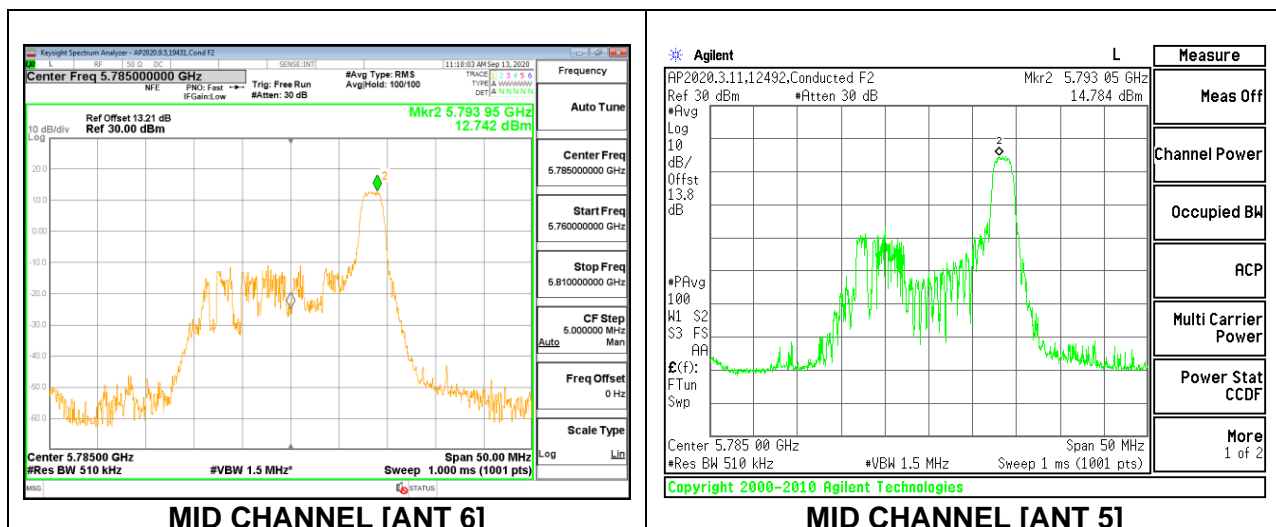

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 242 Tones, RU Index 61**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5745	-2.00	0.94	30.00	30.00
Mid	5785	-2.00	0.94	30.00	30.00
High	5825	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.82	21.28	22.90	30.00	-7.10
Mid	5785	17.86	21.36	22.96	30.00	-7.04
High	5825	17.80	21.26	22.88	30.00	-7.12

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5745	3.548	6.873	8.532	30.00	-21.468
Mid	5785	3.822	6.788	8.564	30.00	-21.436
High	5825	3.782	6.979	8.679	30.00	-21.321

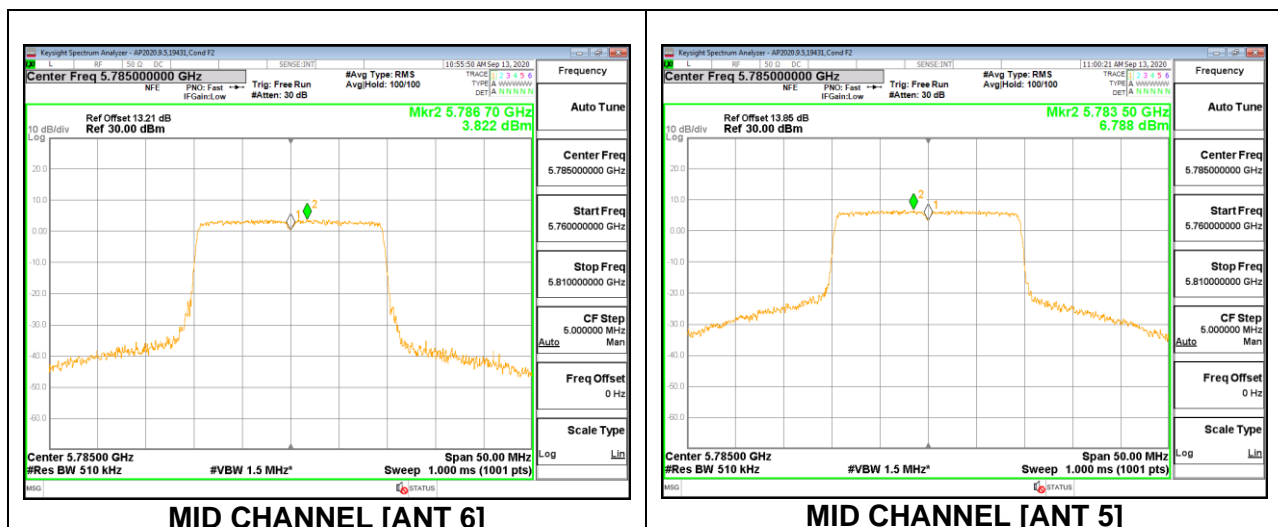



**8.4.23. 802.11ax HE40 MODE IN THE 5.8 GHz BAND**

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 0**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-1.00	30.00	30.00
High	5795	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.65	17.65	30.00	-12.35
High	5795	17.70	17.70	30.00	-12.30

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	12.997	12.997	30.00	-17.00
High	5795	13.123	13.123	30.00	-16.88

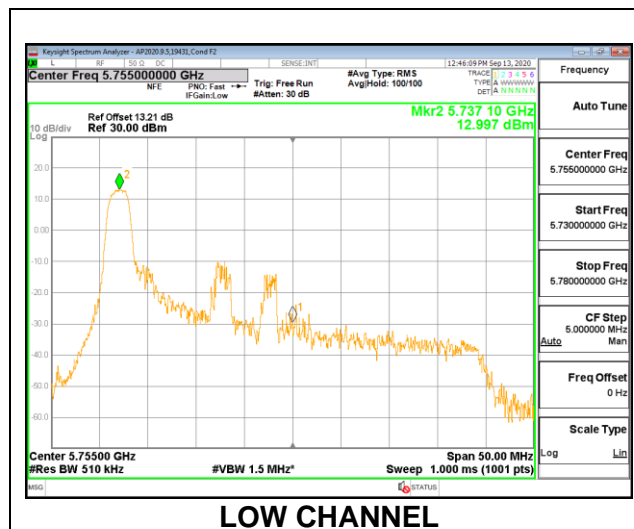

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 8**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-1.00	30.00	30.00
High	5795	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.71	17.71	30.00	-12.29
High	5795	17.75	17.75	30.00	-12.25

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	12.785	12.785	30.00	-17.22
High	5795	12.642	12.642	30.00	-17.36

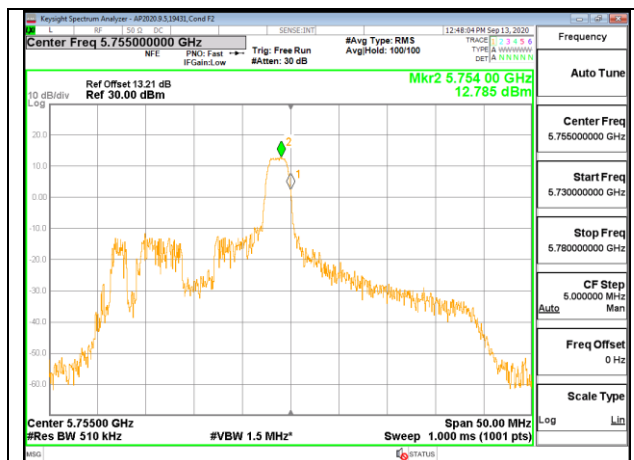

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 17**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-1.00	30.00	30.00
High	5795	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.79	17.79	30.00	-12.21
High	5795	17.82	17.82	30.00	-12.18

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	12.868	12.868	30.00	-17.13
High	5795	12.867	12.867	30.00	-17.13

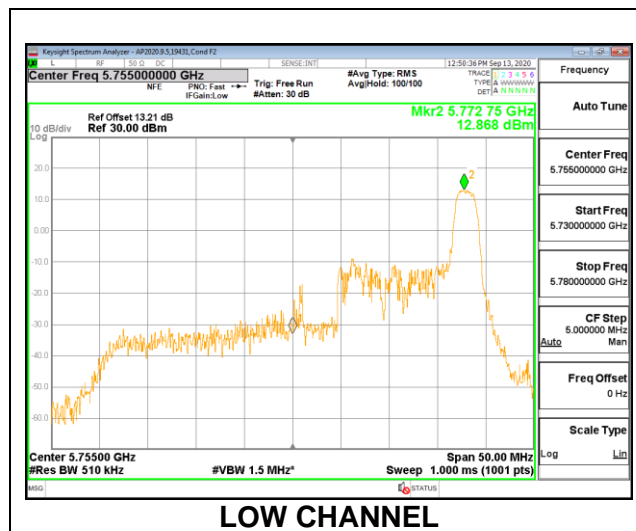

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 484 Tones, RU Index 65**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-1.00	30.00	30.00
High	5795	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.88	17.88	30.00	-12.12
High	5795	17.90	17.90	30.00	-12.10

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	0.684	0.684	30.00	-29.32
High	5795	0.821	0.821	30.00	-29.18

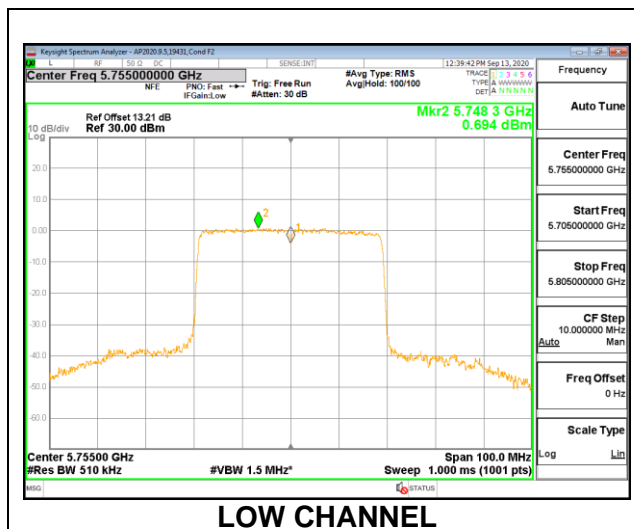

Test Engineer:	44352
Test Date:	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-3.30	30.00	30.00
High	5795	-3.30	30.00	30.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	20.83	20.83	30.00	-9.17
High	5795	20.69	20.69	30.00	-9.31

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	15.594	15.594	30.00	-14.41
High	5795	15.377	15.377	30.00	-14.62

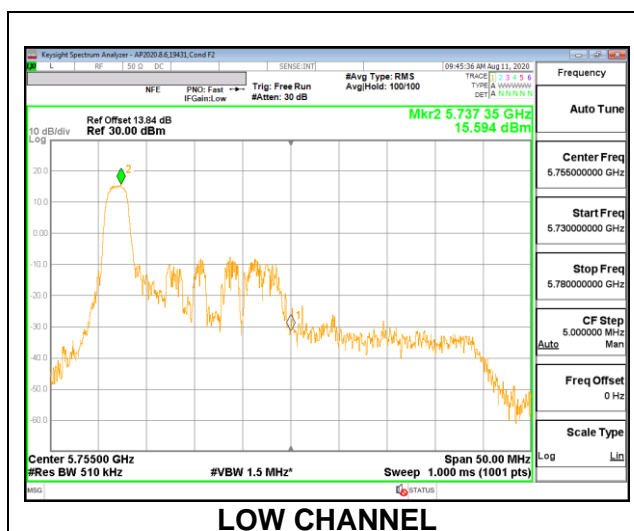

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 8**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-3.30	30.00	30.00
High	5795	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	20.73	20.73	30.00	-9.27
High	5795	20.79	20.79	30.00	-9.21

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	15.283	15.283	30.00	-14.72
High	5795	15.325	15.325	30.00	-14.68

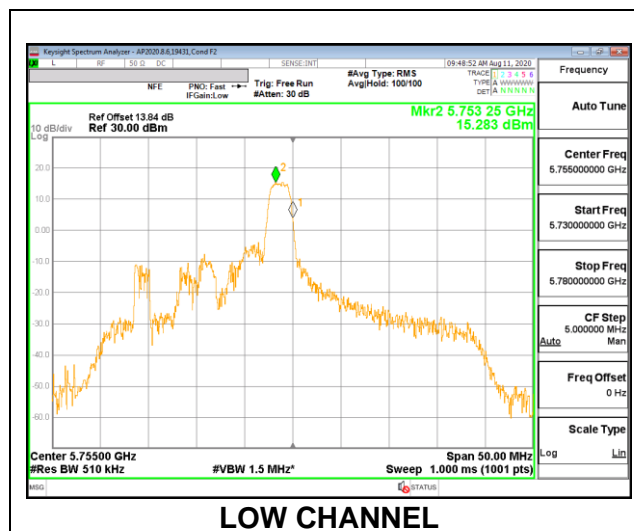

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 17**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-3.30	30.00	30.00
High	5795	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	20.89	20.89	30.00	-9.11
High	5795	20.92	20.92	30.00	-9.08

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	15.534	15.534	30.00	-14.47
High	5795	15.517	15.517	30.00	-14.48

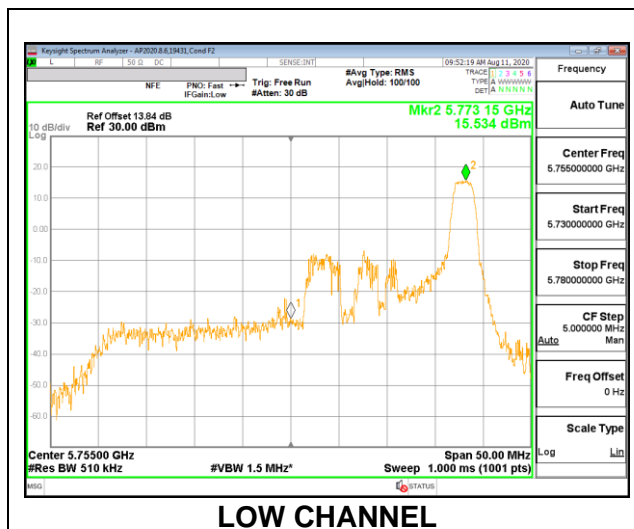

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 484 Tones, RU Index 65**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-3.30	30.00	30.00
High	5795	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	20.88	20.88	30.00	-9.12
High	5795	20.92	20.92	30.00	-9.08

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	3.556	3.556	30.00	-26.44
High	5795	3.665	3.665	30.00	-26.34

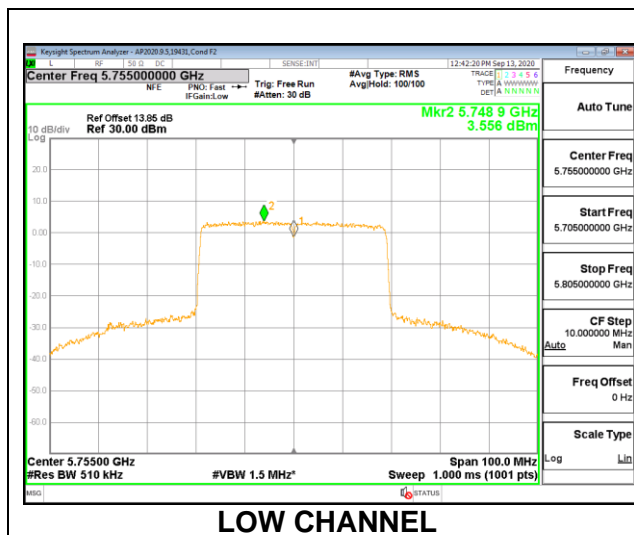



**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 26 Tones, RU Index 0**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-2.00	0.94	30.00	30.00
High	5795	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**


Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.80	20.75	22.53	30.00	-7.47
High	5795	17.86	20.89	22.64	30.00	-7.36

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	12.884	15.331	17.288	30.00	-12.712
High	5795	13.040	15.424	17.404	30.00	-12.596

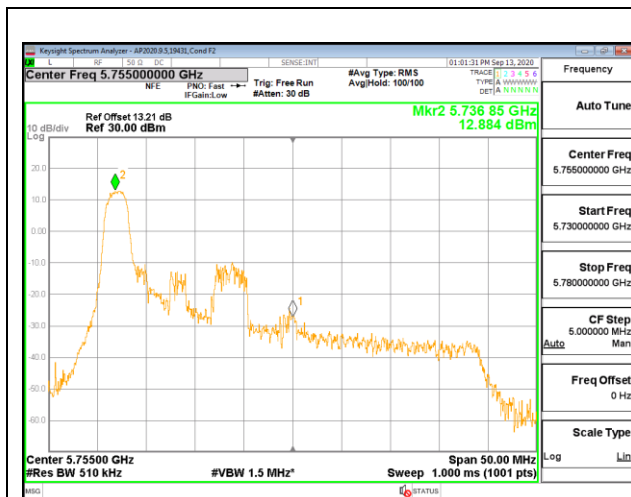

**LOW CHANNEL [ANT 6]**

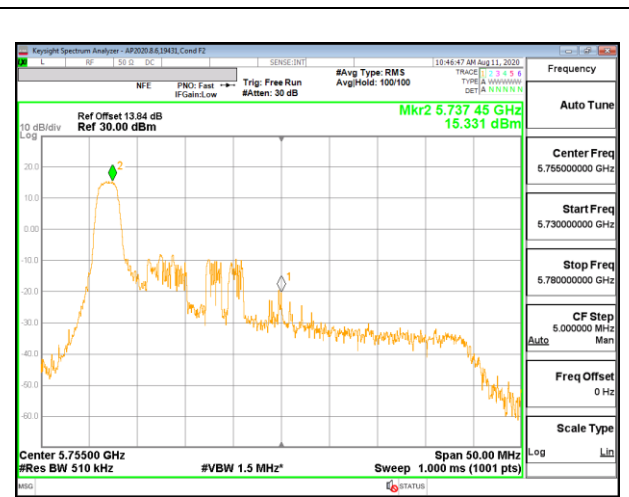

**LOW CHANNEL [ANT 5]**

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 26 Tones, RU Index 8**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-2.00	0.94	30.00	30.00
High	5795	-2.00	0.94	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.76	20.79	22.54	30.00	-7.46
High	5795	17.79	20.88	22.61	30.00	-7.39

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	12.440	15.452	17.212	30.00	-12.788
High	5795	12.855	15.438	17.346	30.00	-12.654

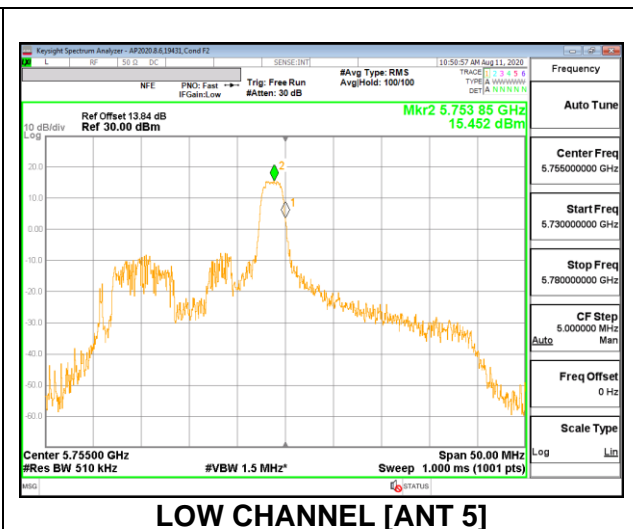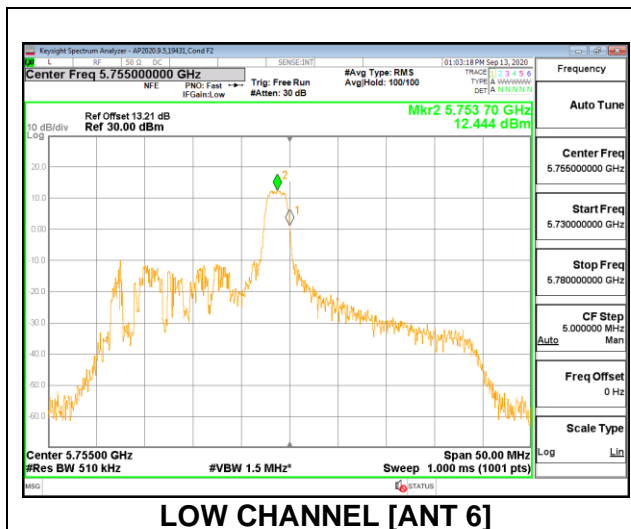

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 26 Tones, RU Index 17**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-2.00	0.94	30.00	30.00
High	5795	-2.00	0.94	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.76	20.69	22.48	30.00	-7.52
High	5795	17.88	20.78	22.58	30.00	-7.42

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	12.901	15.515	17.412	30.00	-12.588
High	5795	12.761	15.408	17.293	30.00	-12.707

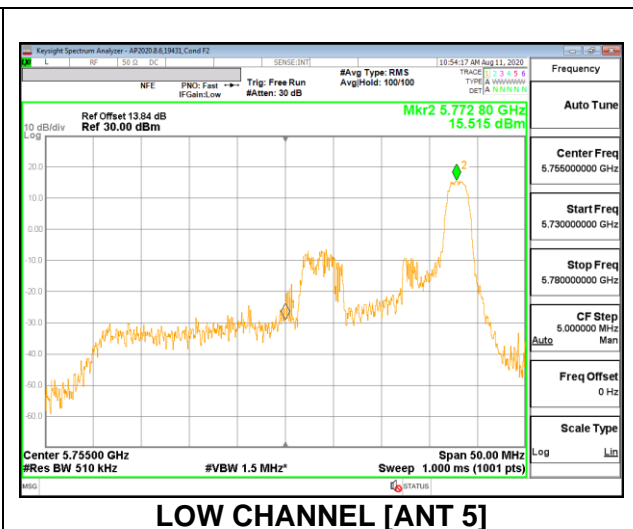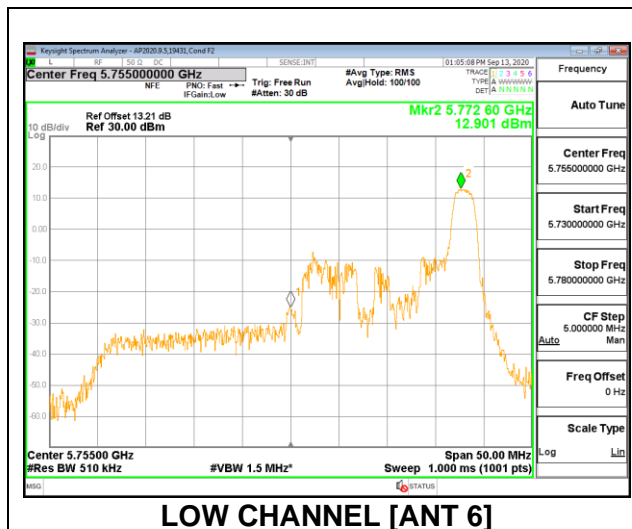

**2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC+IC) MOBILE – 484 Tones, RU Index 65**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Low	5755	-2.00	0.94	30.00	30.00
High	5795	-2.00	0.94	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	17.80	20.82	22.58	30.00	-7.42
High	5795	17.82	20.89	22.63	30.00	-7.37

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Low	5755	0.781	3.821	5.572	30.00	-24.428
High	5795	0.780	3.692	5.486	30.00	-24.514

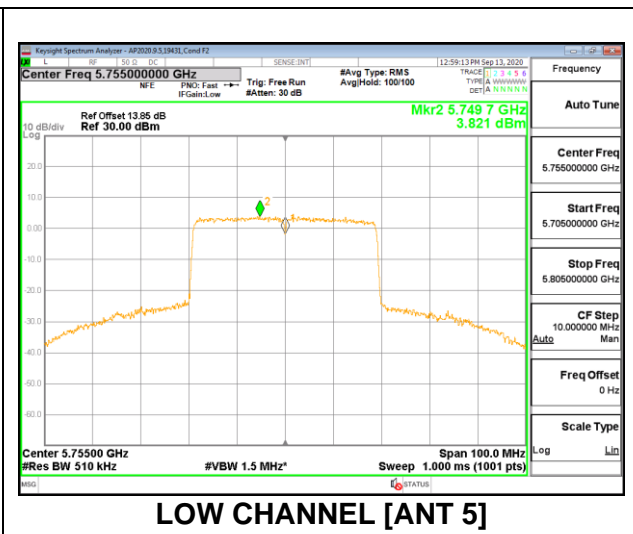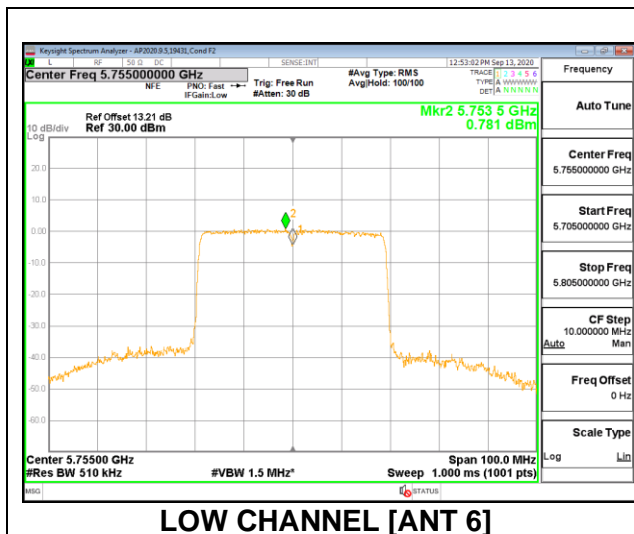

**8.4.24. 802.11ax HE80 MODE IN THE 5.8 GHz BAND**

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 0**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.68	17.68	30.00	-12.32

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	12.461	12.461	30.00	-17.54

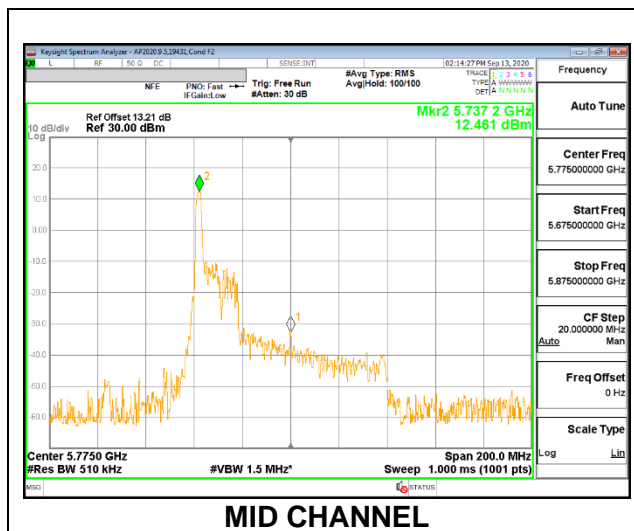

**MID CHANNEL**

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 18**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.80	17.80	30.00	-12.20

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	12.249	12.249	30.00	-17.75

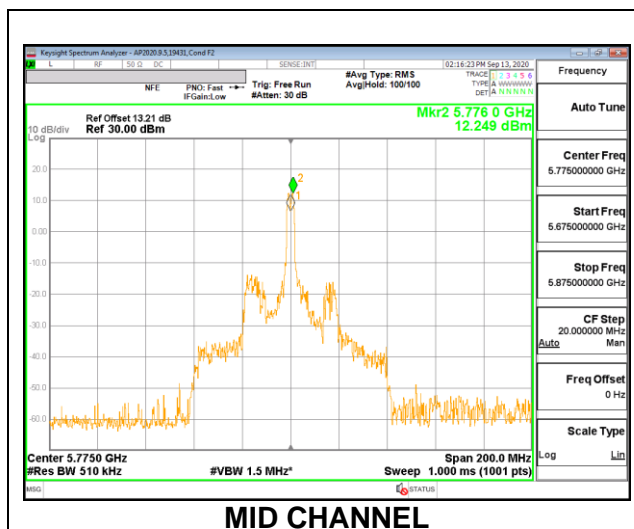

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 36**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.83	17.83	30.00	-12.17

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	12.599	12.599	30.00	-17.40

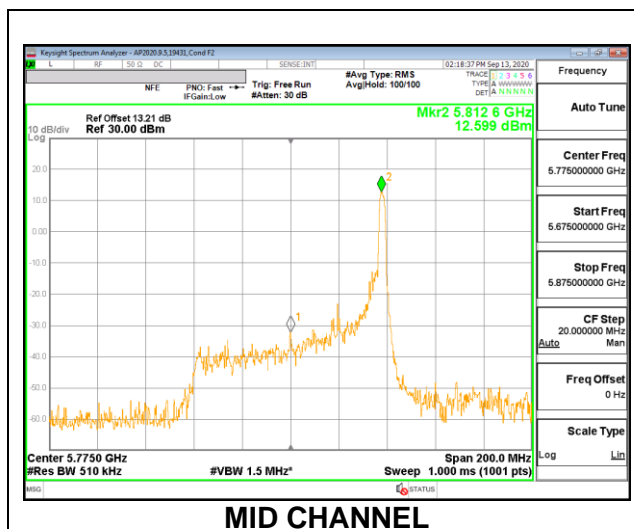

**1TX Antenna 6 MODE (FCC+IC) MOBILE – 996 Tones, RU Index 67**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-1.00	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.880	17.880	30.00	-12.12

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	-2.079	-2.079	30.00	-32.08

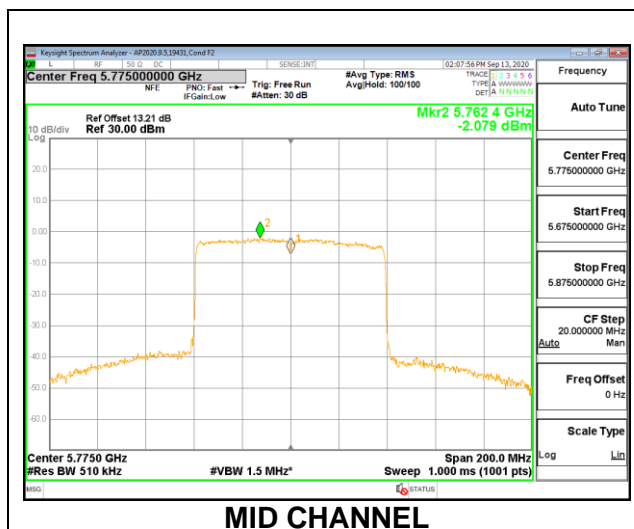



**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 0**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	20.39	20.39	30.00	-9.61

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	14.513	14.513	30.00	-15.49

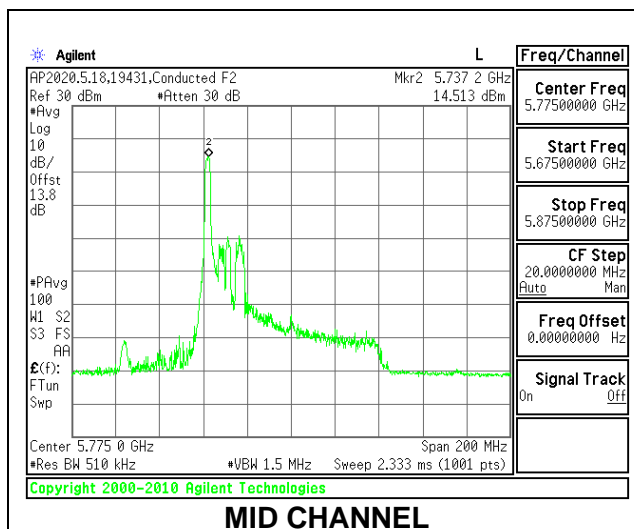

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 18**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	20.28	20.28	30.00	-9.72

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	13.956	13.956	30.00	-16.04

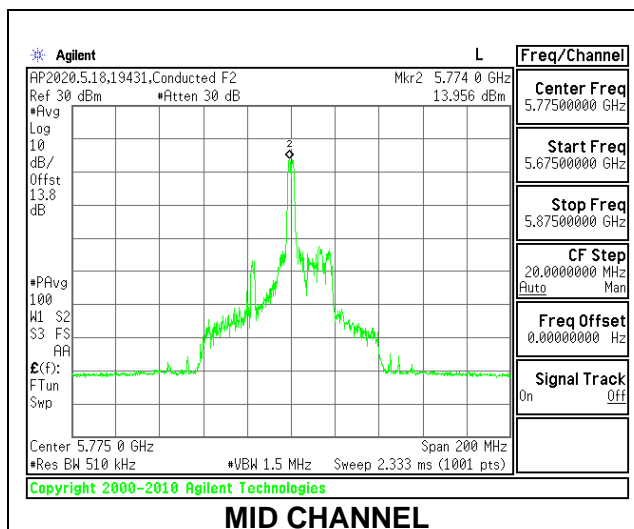

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 26 Tones, RU Index 36**

<b>Test Engineer:</b>	44352
<b>Test Date:</b>	9/8/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	20.35	20.35	30.00	-9.65

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	14.012	14.012	30.00	-15.99

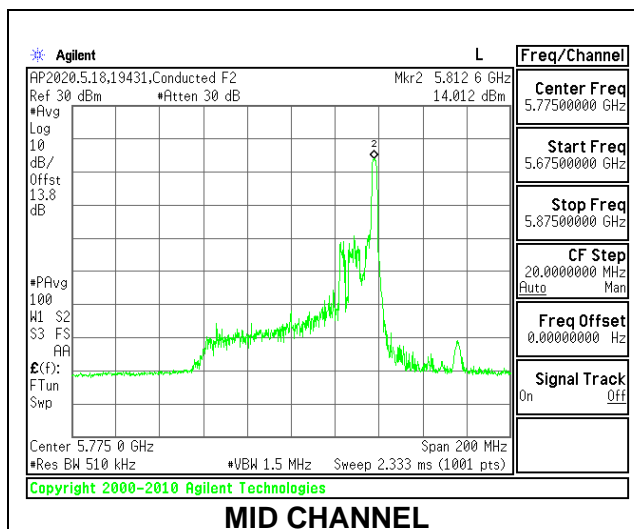

**1TX Antenna 5 MODE (FCC+IC) MOBILE – 996 Tones, RU Index 67**

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-3.30	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	20.42	20.42	30.00	-9.58

**PSD Results**

Channel	Frequency (MHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	0.174	0.174	30.00	-29.83

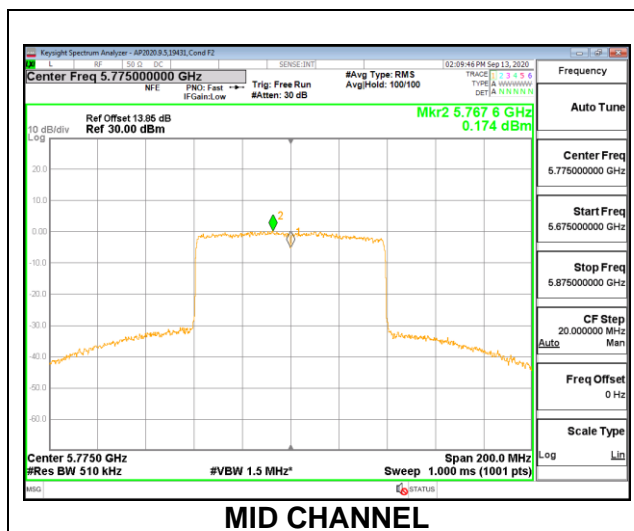

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	1.00	0.94	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.85	19.84	21.97	30.00	-8.03

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	12.402	14.431	16.544	30.00	-13.456

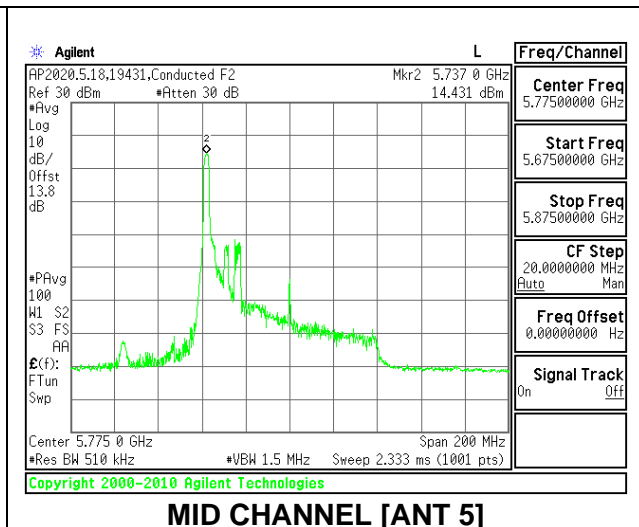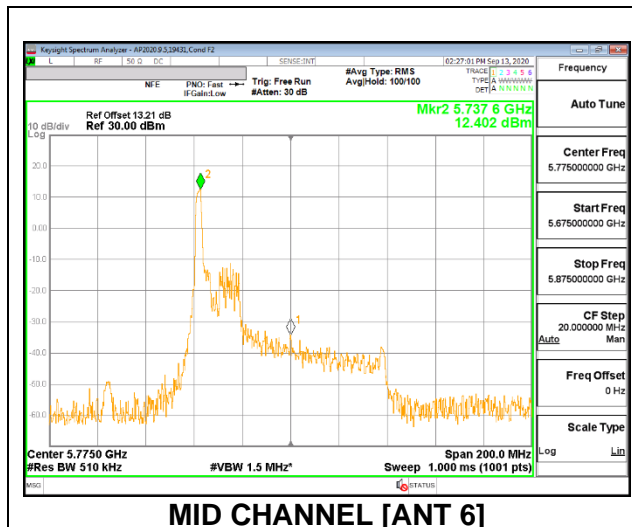

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-2.00	0.94	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.85	19.92	22.02	30.00	-7.98

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	12.226	14.098	16.272	30.00	-13.728

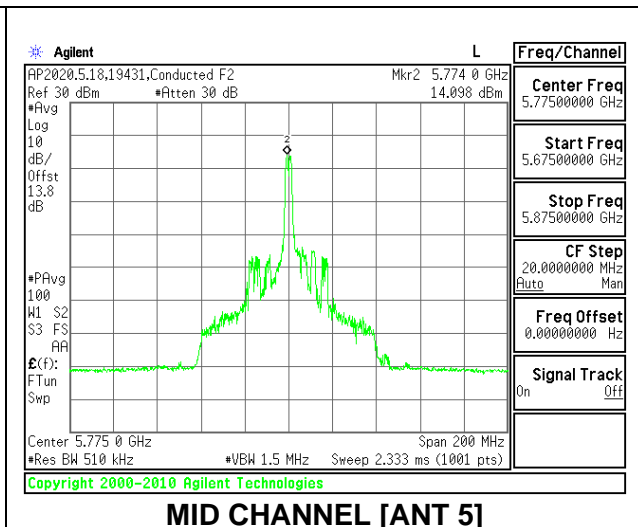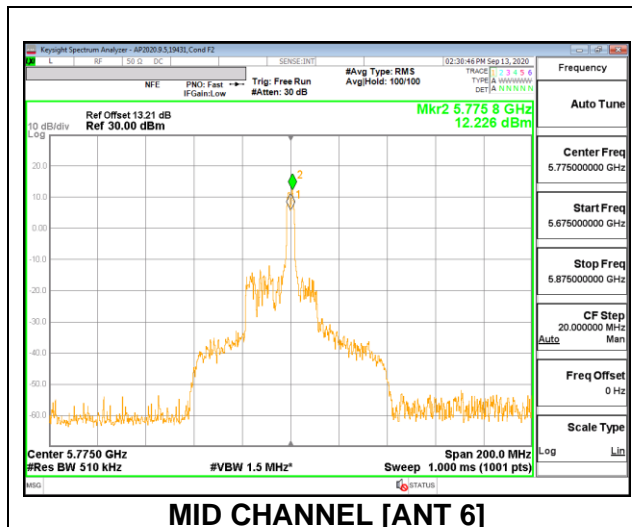

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-2.00	0.94	30.00	30.00



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.91	19.94	22.05	30.00	-7.95

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	12.842	14.242	16.608	30.00	-13.392

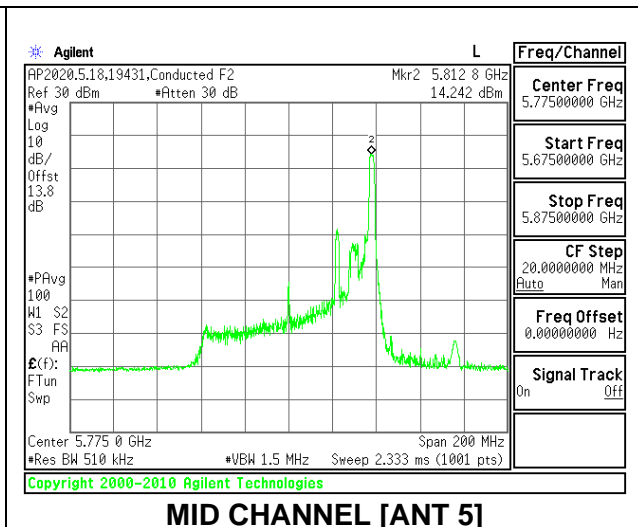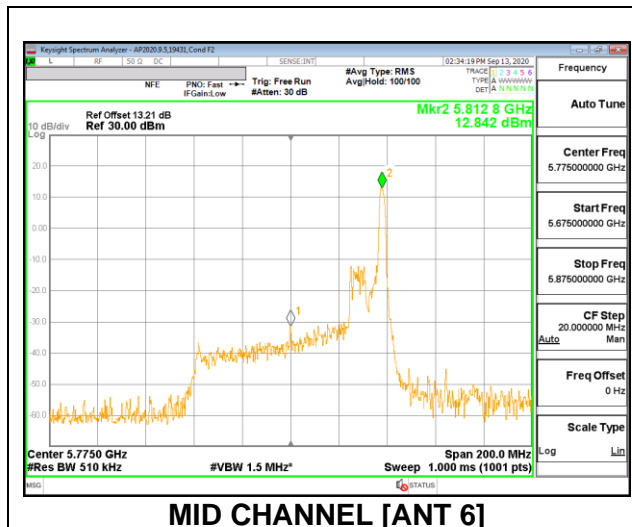

<b>Test Engineer:</b>	44352 & 19431
<b>Test Date:</b>	9/13/2020

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/500KHz)
Mid	5775	-2.00	0.94	30.00	30.00


<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna 6 Meas Power (dBm)	Antenna 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.99	19.93	22.08	30.00	-7.92

**PSD Results**

Channel	Frequency (MHz)	Antenna 6 Meas PSD (dBm/500KHz)	Antenna 5 Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	-2.015	0.201	2.243	30.00	-27.757

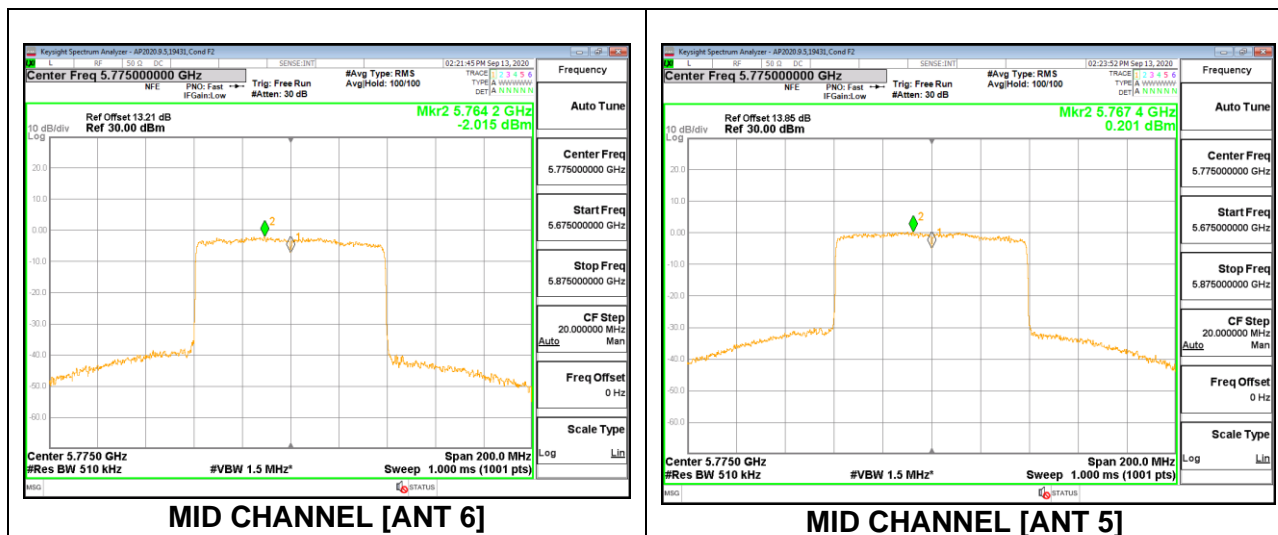

**END OF TEST REPORT**