
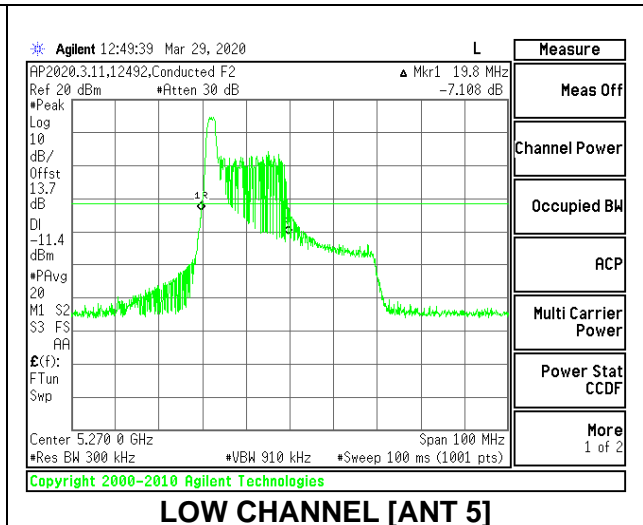




2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5270	20.40	19.90	18.4629	18.1335
High	5310	19.75	19.40	18.4905	18.2917

LOW CHANNEL 26dB

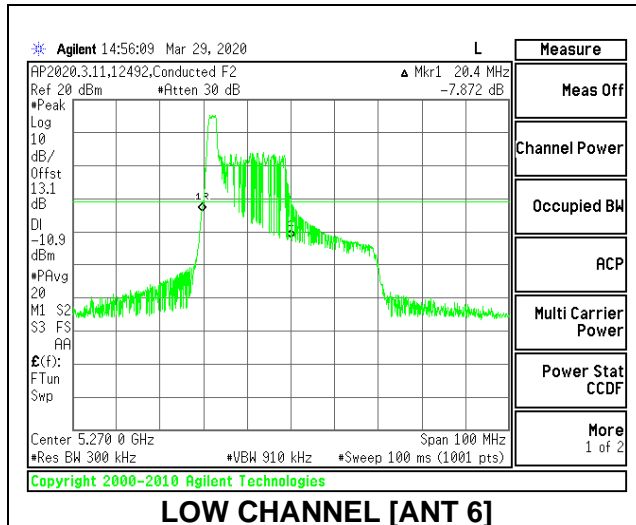



LOW CHANNEL OBW

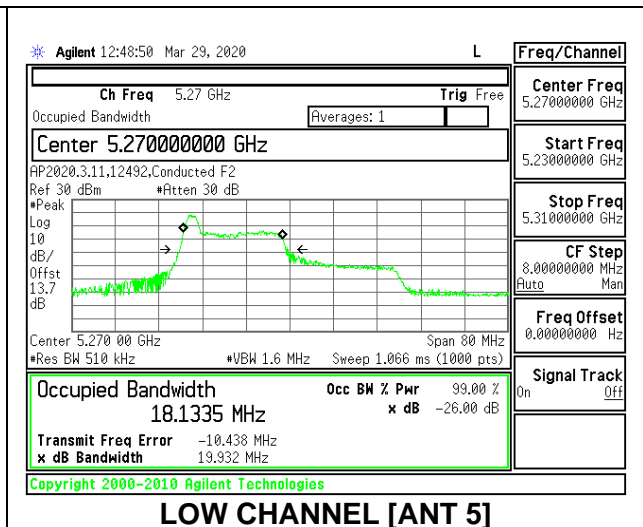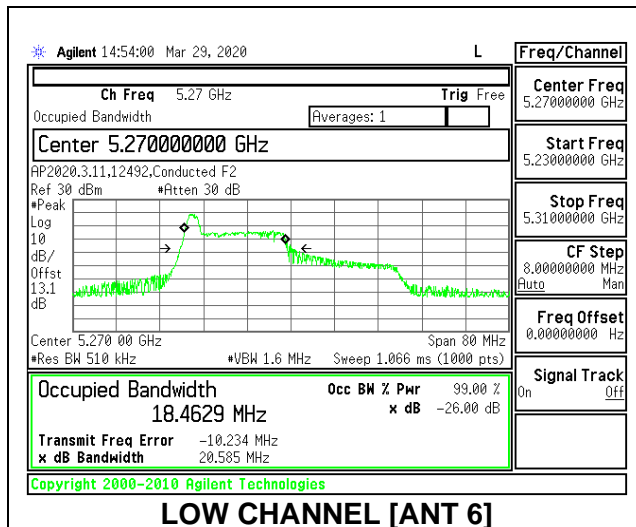



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5270	23.00	22.90	21.5420	21.3478
High	5310	23.10	22.50	22.0093	21.4267

LOW CHANNEL 26dB

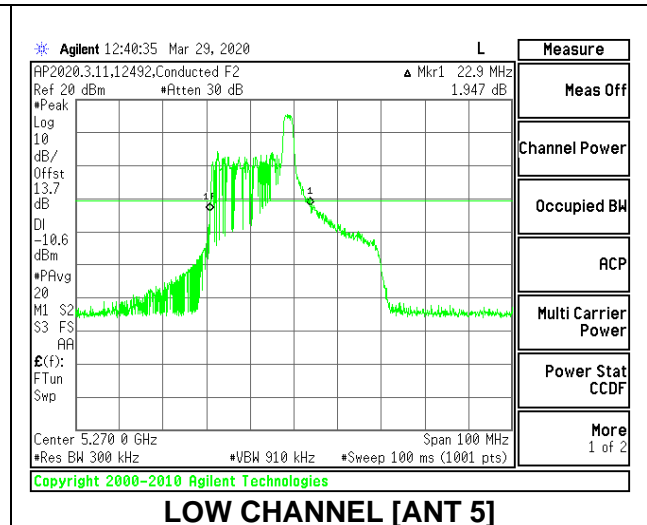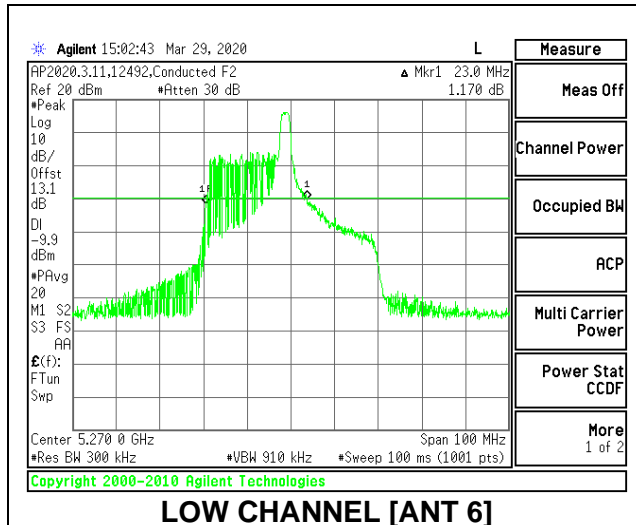



LOW CHANNEL OBW

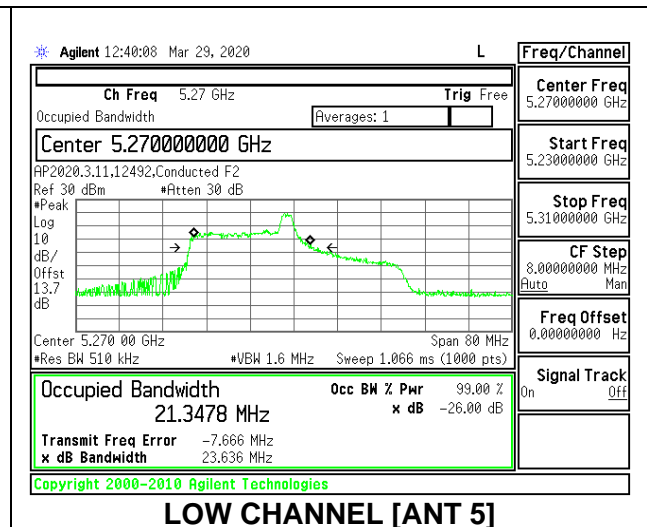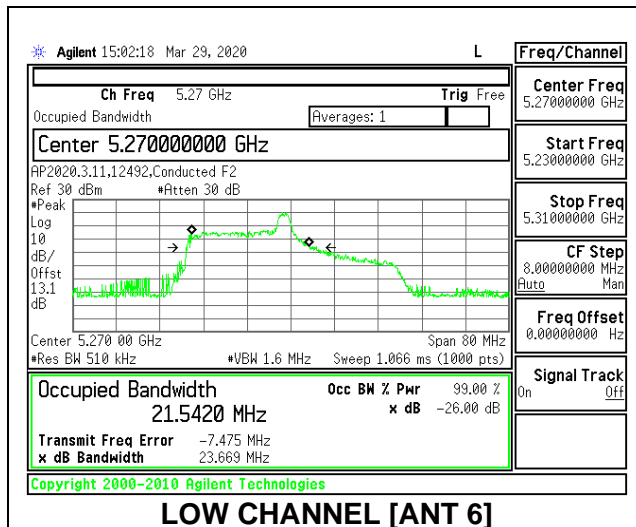



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5270	20.20	19.20	18.6328	18.1828
High	5310	20.30	19.40	17.2305	18.1986

LOW CHANNEL 26dB

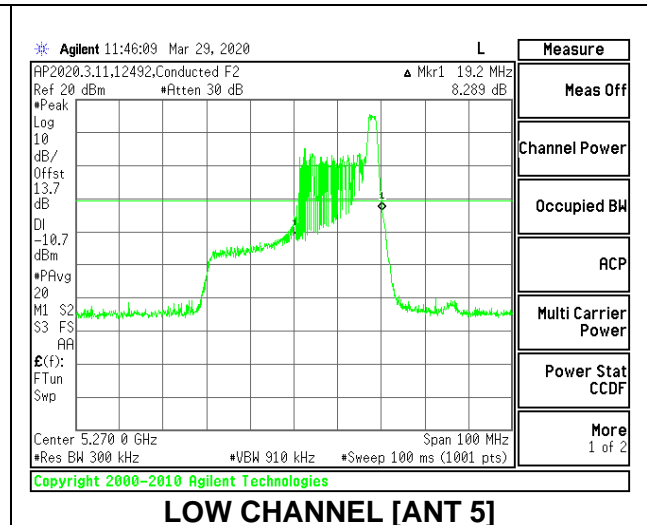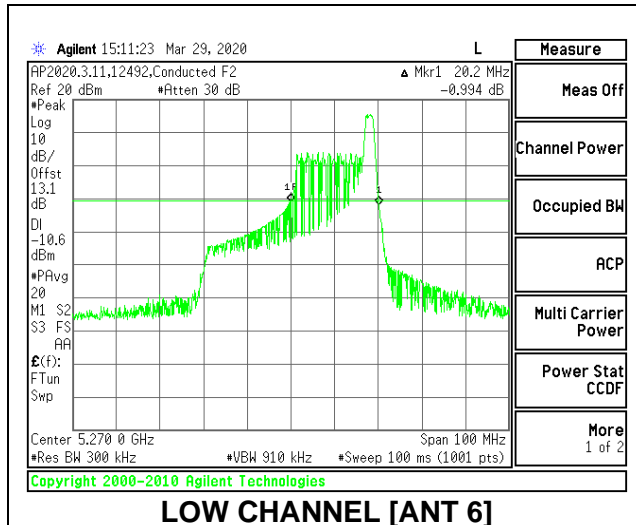



LOW CHANNEL OBW

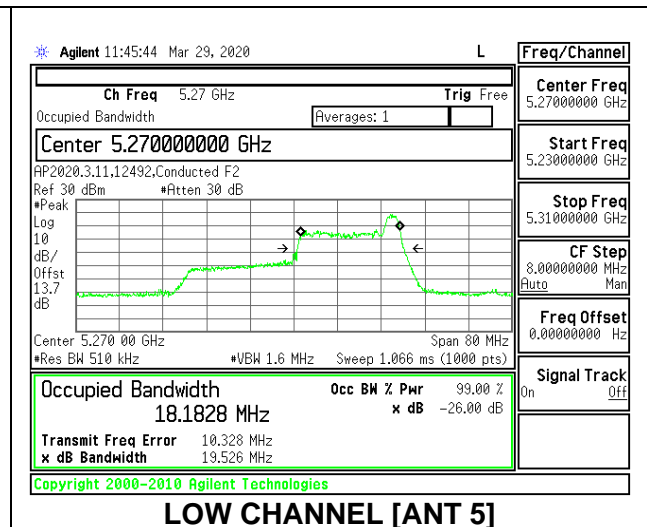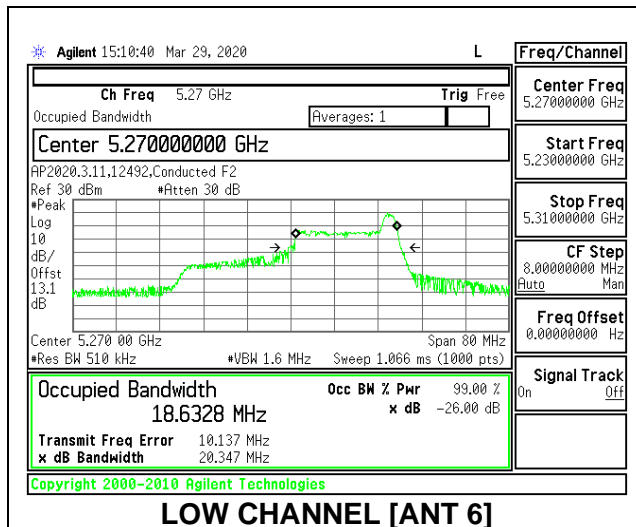



2TX Antenna 6 + Antenna 5 CDD MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5270	41.00	40.80	37.3327	37.3493
High	5310	41.10	40.90	37.3378	37.4757

LOW CHANNEL 26dB

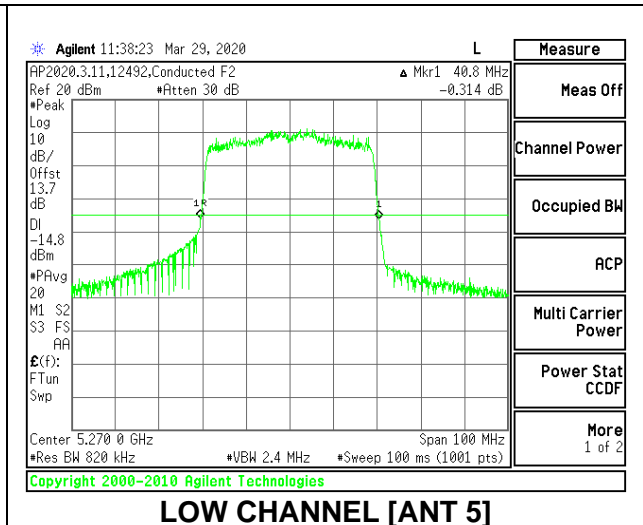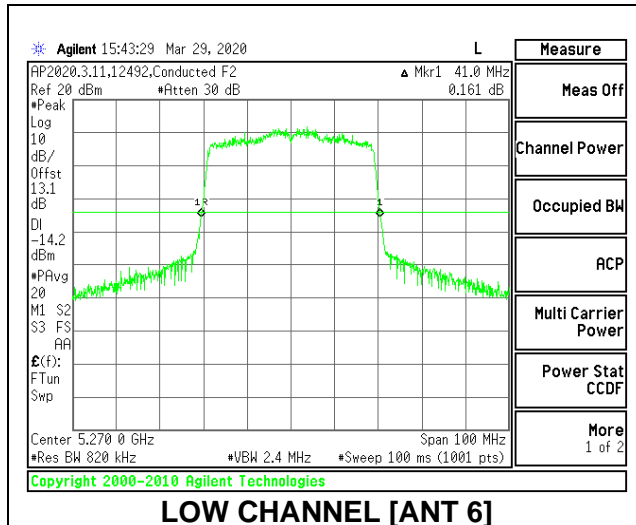



LOW CHANNEL OBW

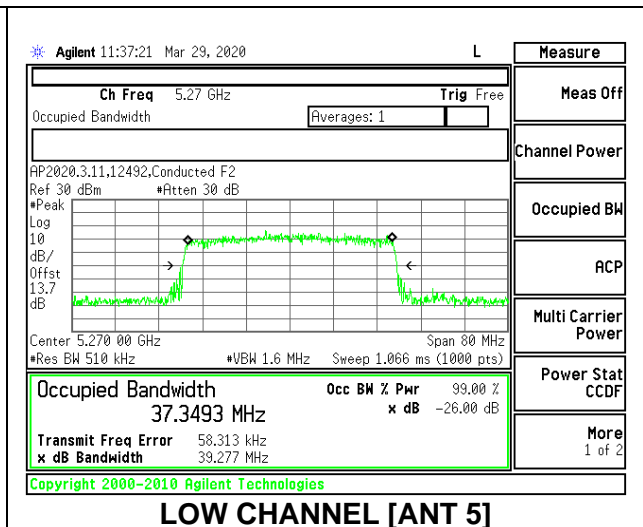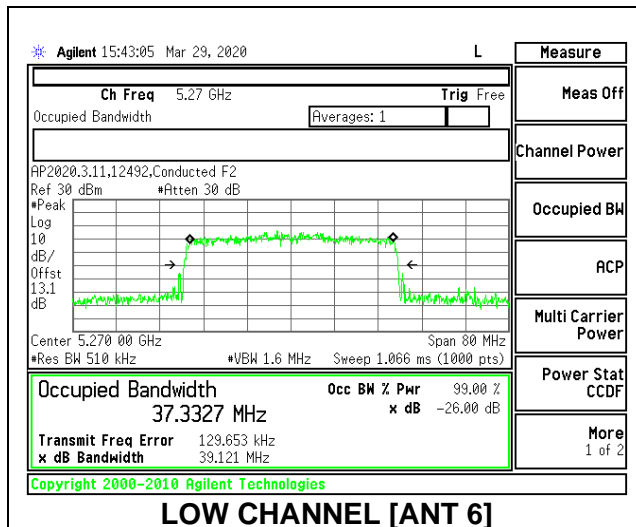

8.2.12. 802.11ax HE80 MODE IN THE 5.3 GHz BAND



1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	19.80	19.6523

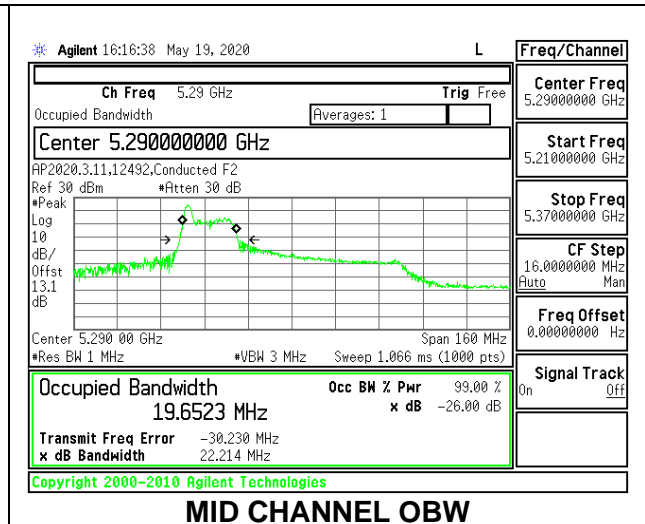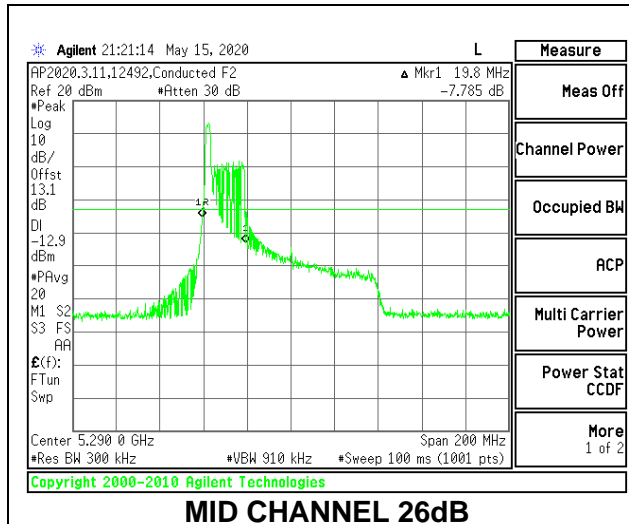



1TX Antenna 6 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	40.80	37.7559

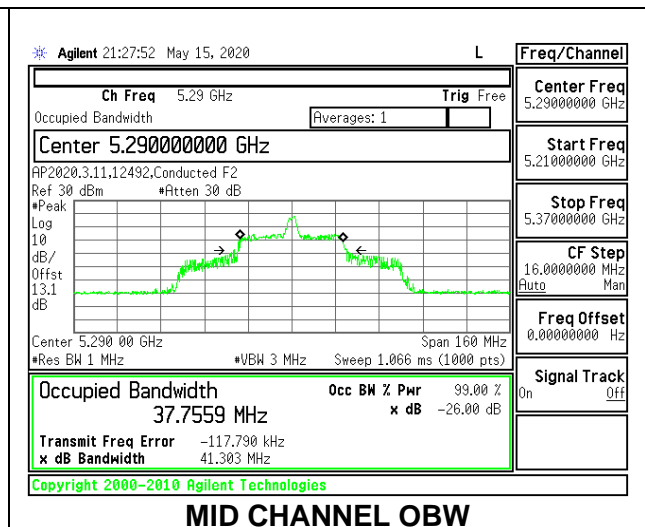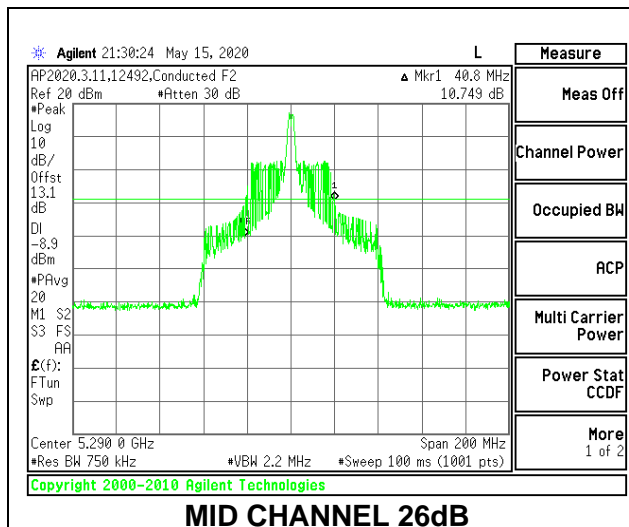



1TX Antenna 6 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	21.20	19.9807

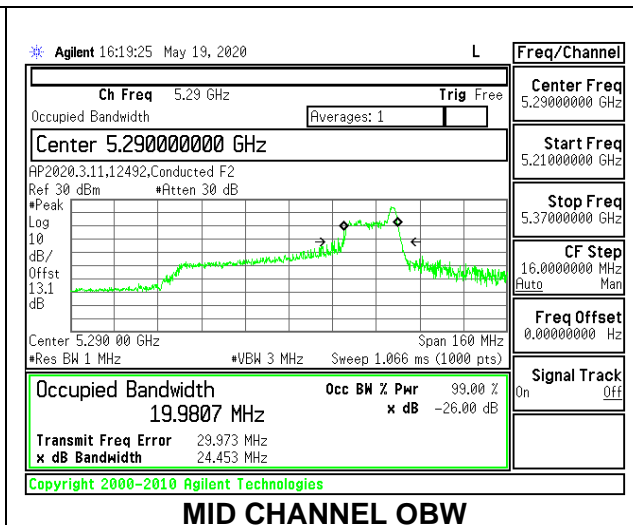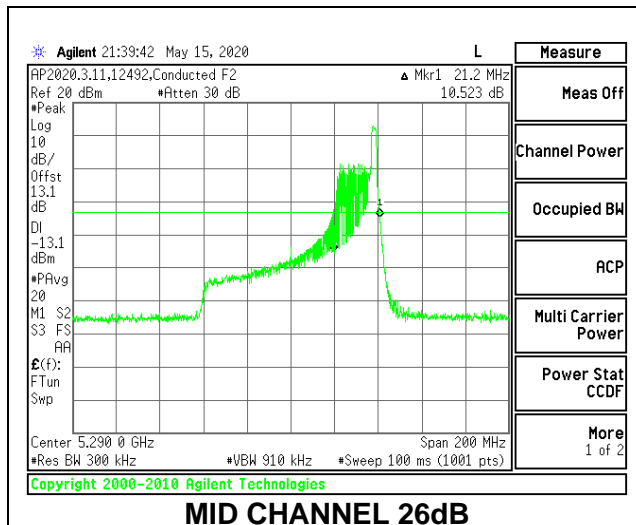



1TX Antenna 6 MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	82.80	76.5273

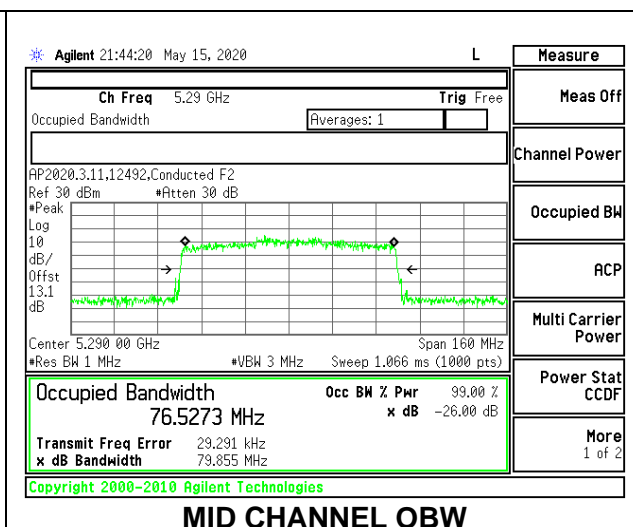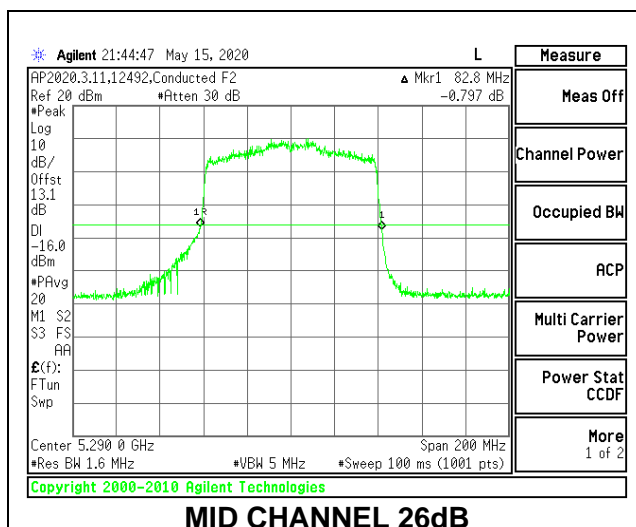



1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	20.00	19.133

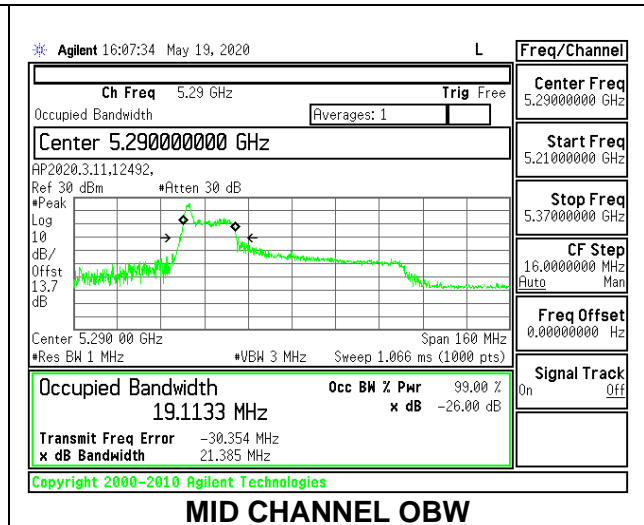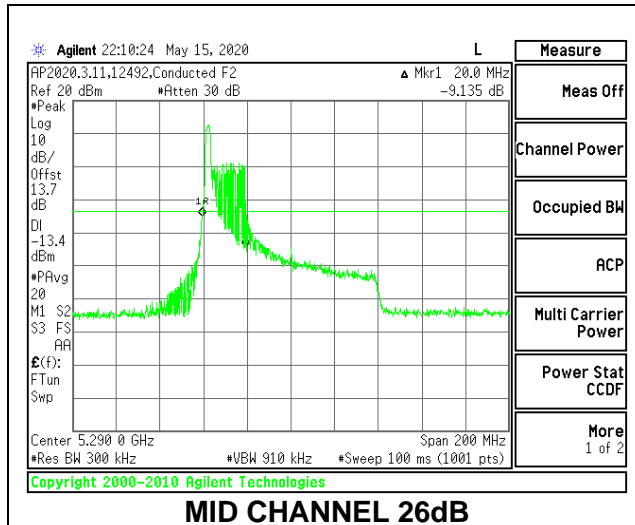



1TX Antenna 5 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	40.60	37.0660

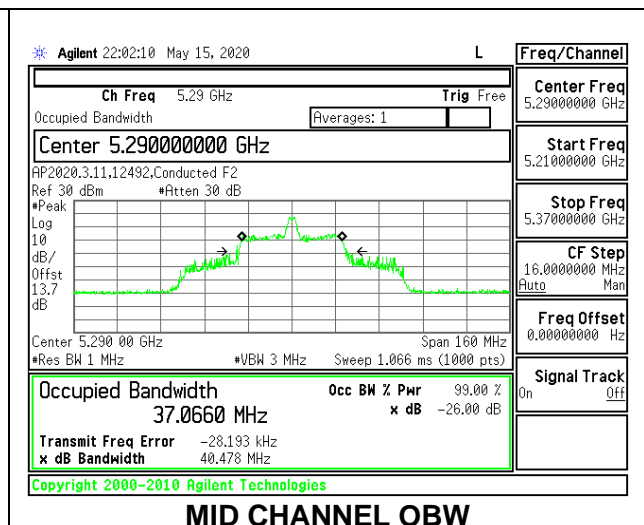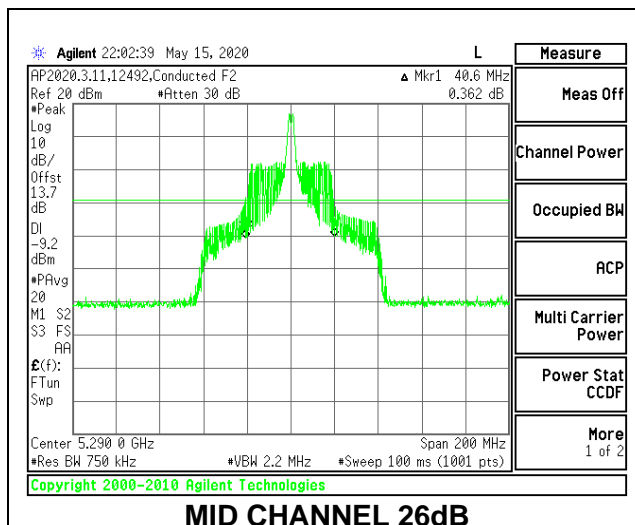



1TX Antenna 5 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	20.80	19.7753

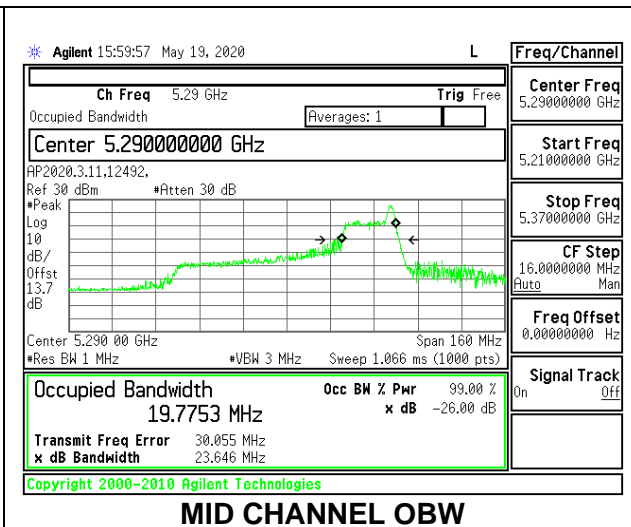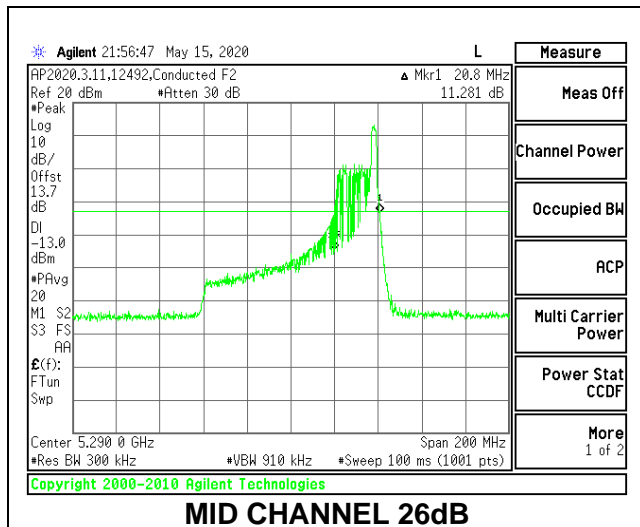

1TX Antenna 5 MODE: 996 Tones, RU Index 67



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5290	83.20	76.6661

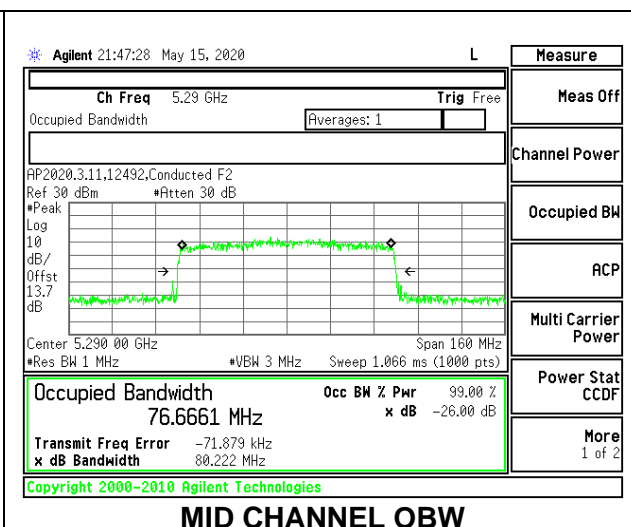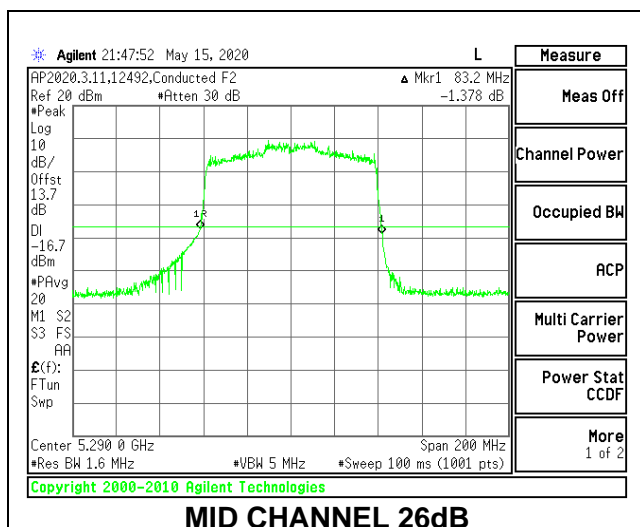



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5290	20.00	20.20	19.1224	19.3686

MID CHANNEL 26dB

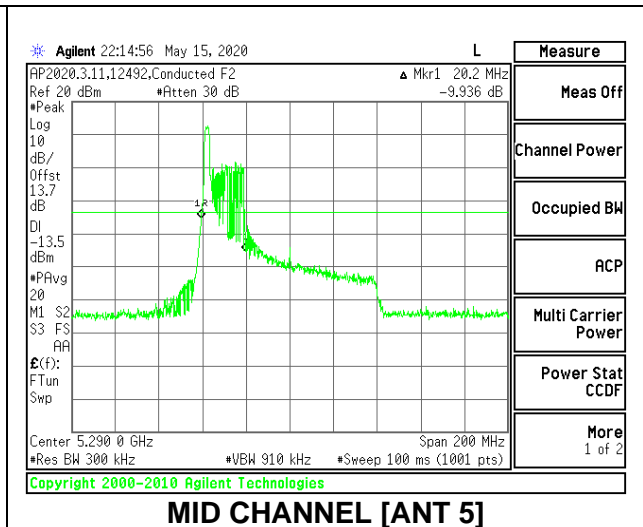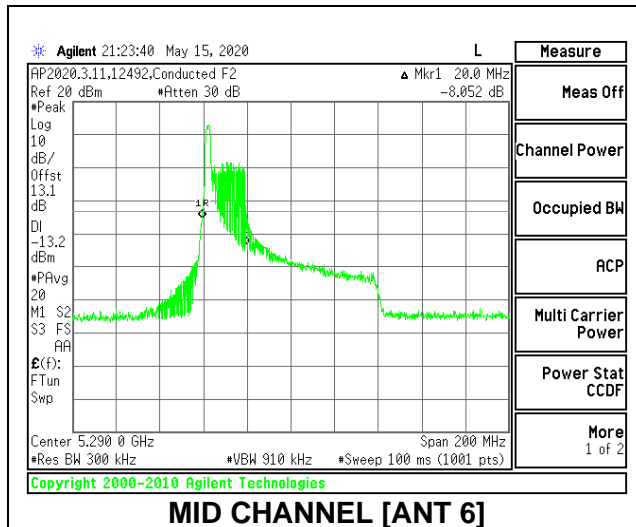



MID CHANNEL OBW

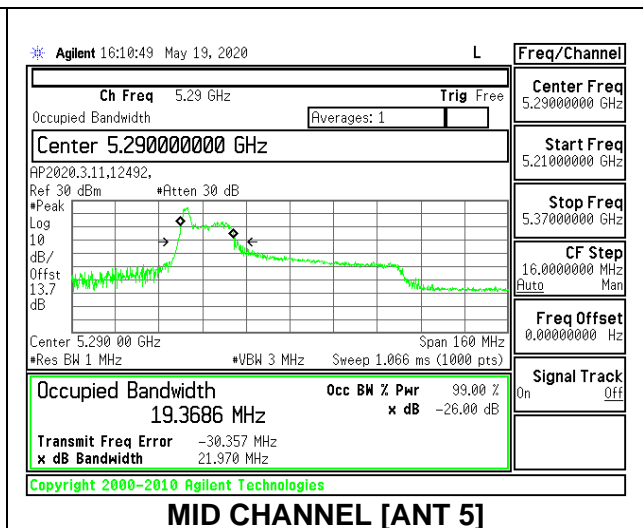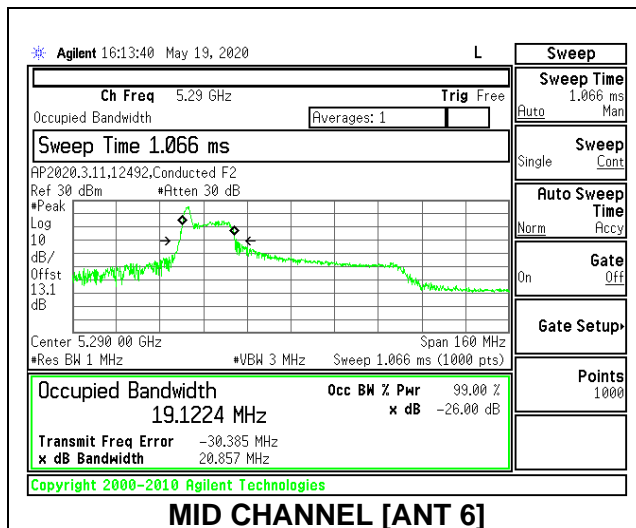



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5290	40.60	38.60	37.2709	36.9826

MID CHANNEL 26dB

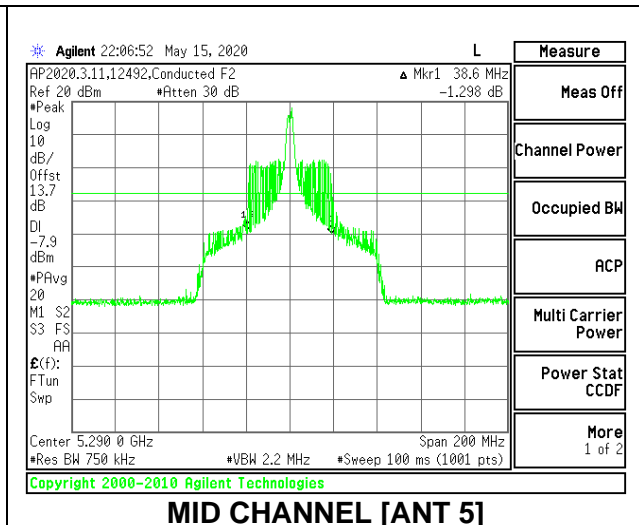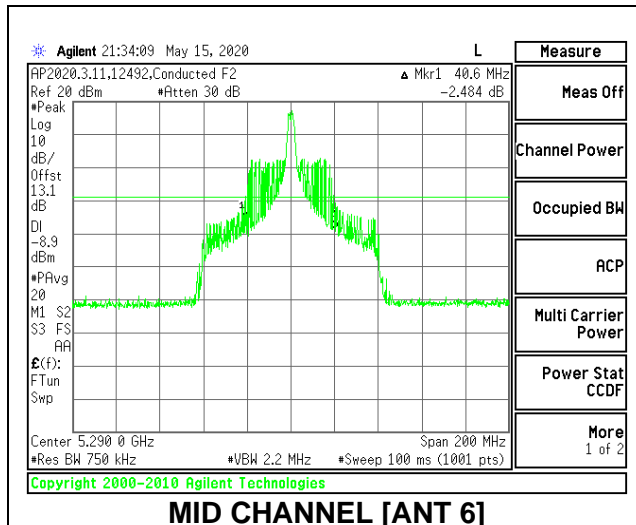



MID CHANNEL OBW

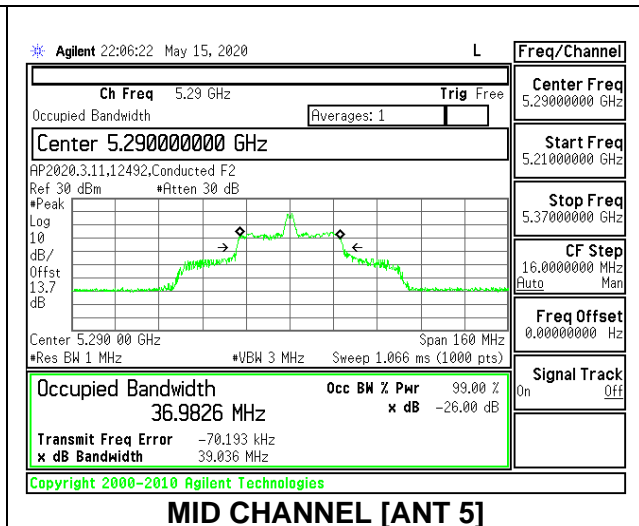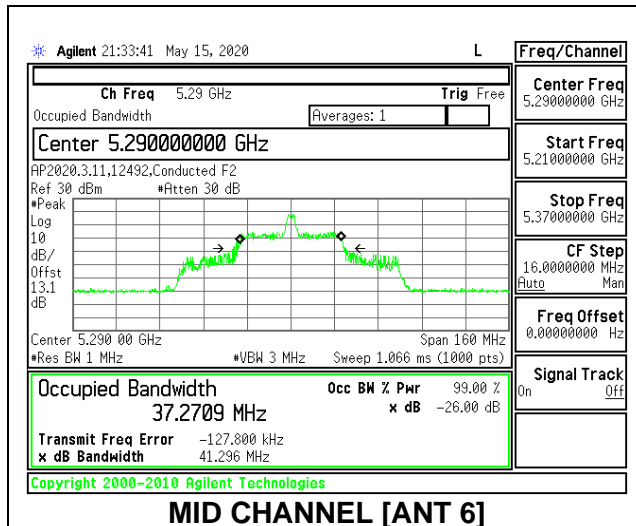



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5290	21.20	20.00	20.4169	18.9577

MID CHANNEL 26dB

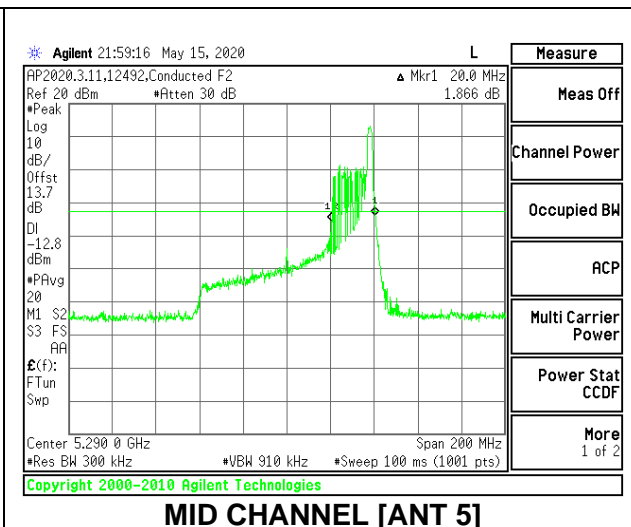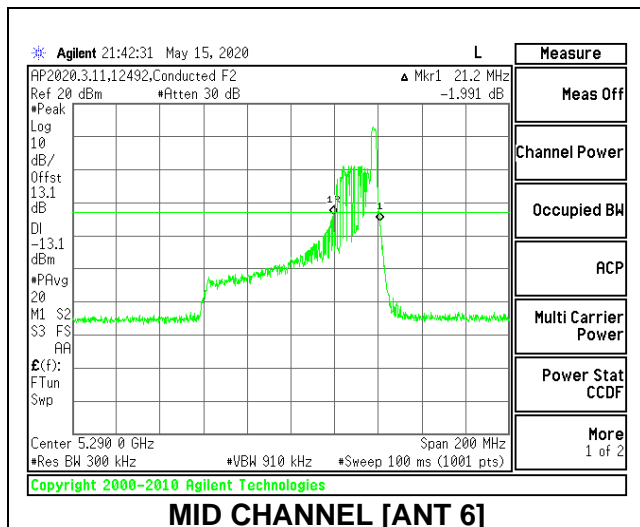



MID CHANNEL OBW

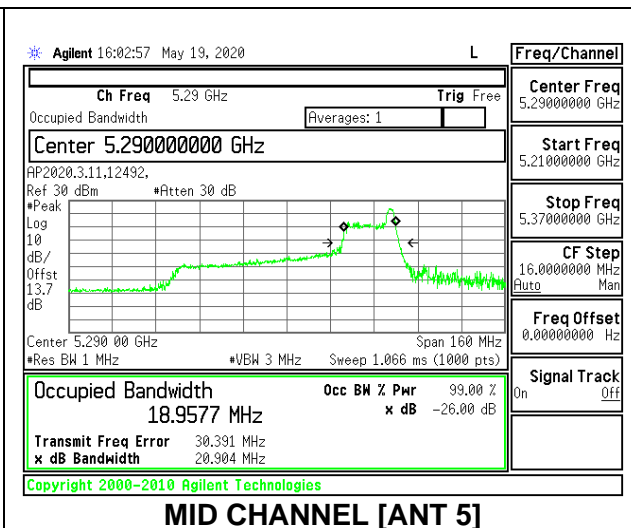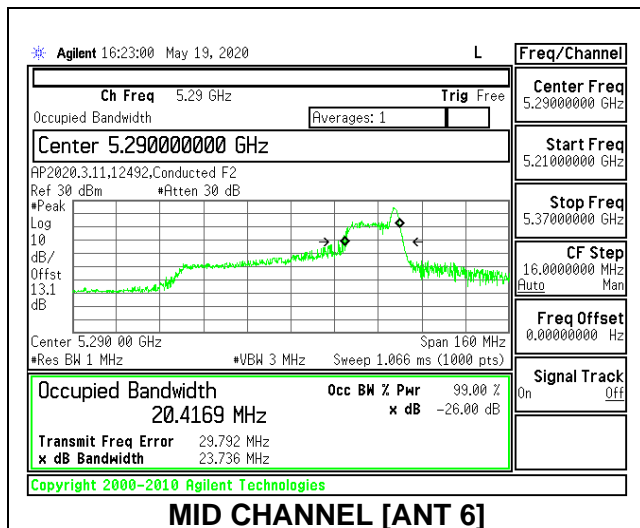



2TX Antenna 6 + Antenna 5 CDD MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5290	83.20	82.80	76.7773	76.5088

MID CHANNEL 26dB

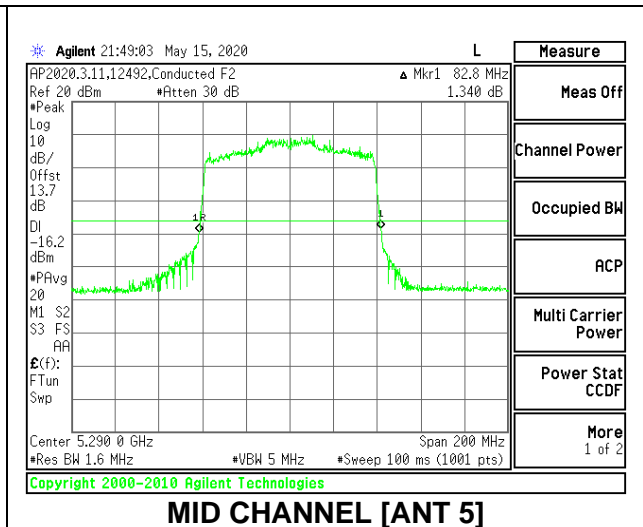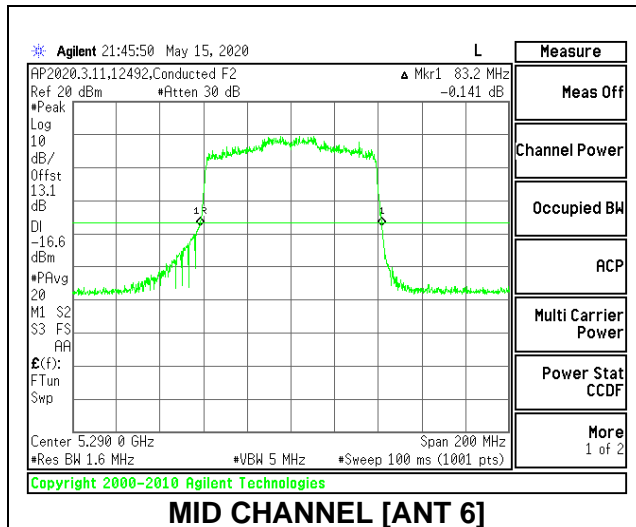



MID CHANNEL OBW

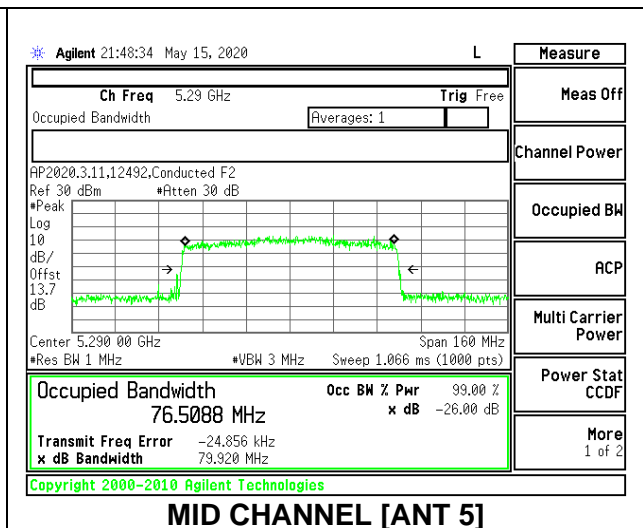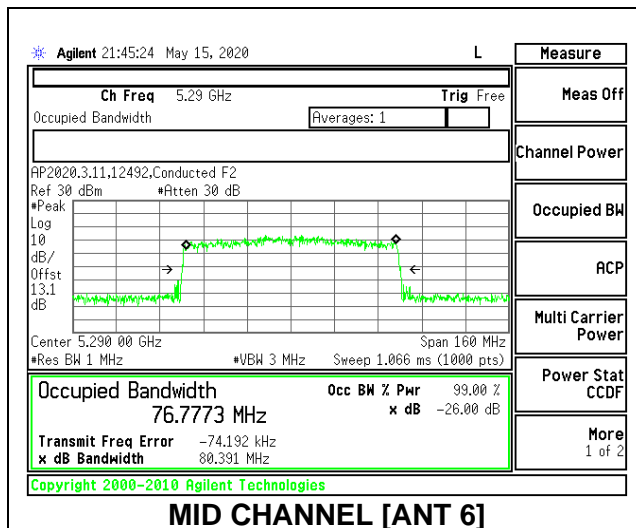

8.2.13. 802.11n HT20 MODE IN THE 5.6 GHz BAND



1TX Antenna 6 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	21.45	17.6897
Mid	5580	21.50	17.6136
High	5700	21.70	17.7292
144	5720	21.50	17.6625

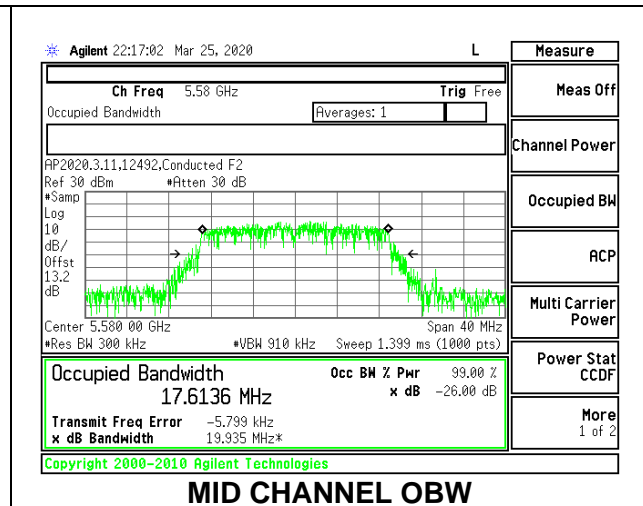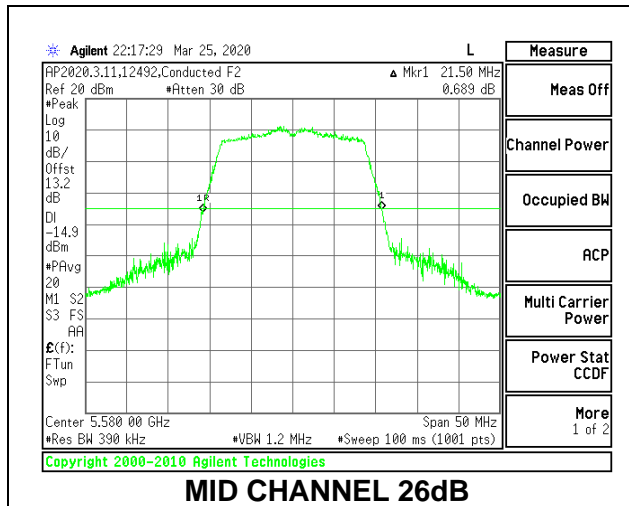

1TX Antenna 5 MODE



Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	21.55	17.6905
Mid	5580	21.35	17.6721
High	5700	21.55	17.6566
144	5720	21.50	17.7357

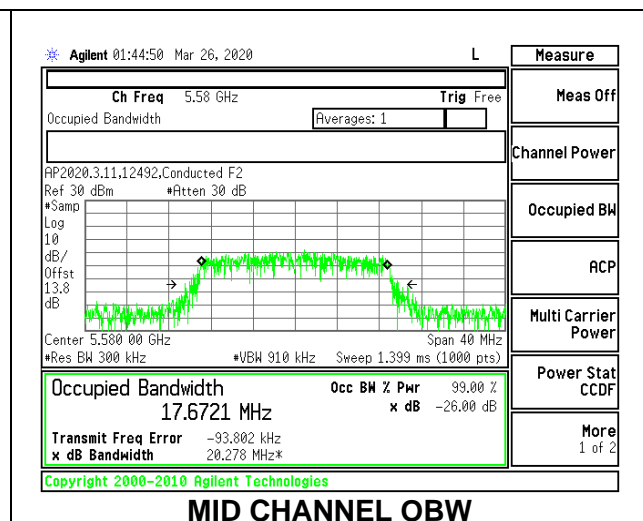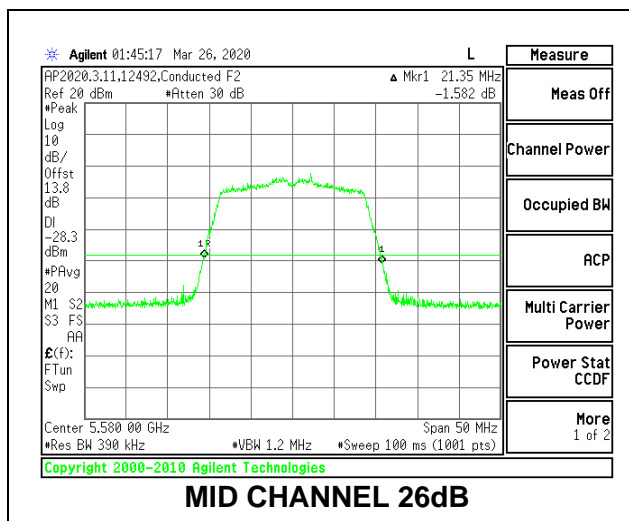



2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	21.50	21.30	17.5966	17.6856
Mid	5580	21.50	21.30	17.7464	17.5747
High	5700	21.70	21.35	17.6478	17.6786
144	5720	21.50	21.20	17.6332	17.6008

MID CHANNEL 26dB

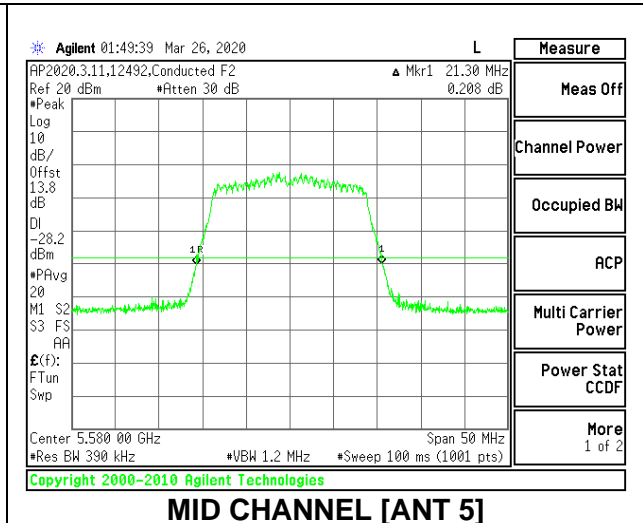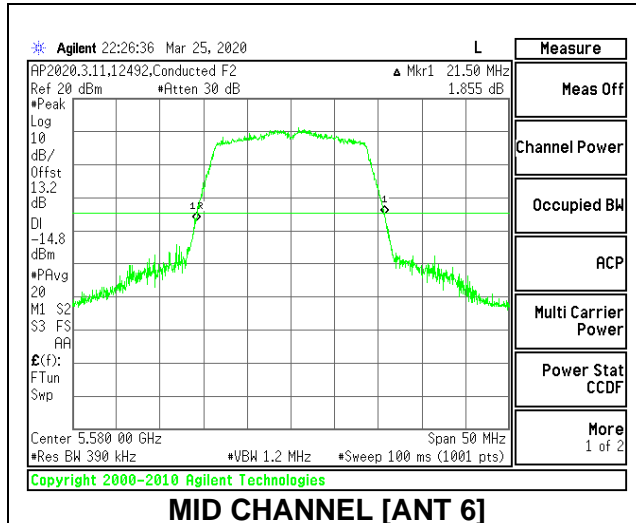



MID CHANNEL OBW

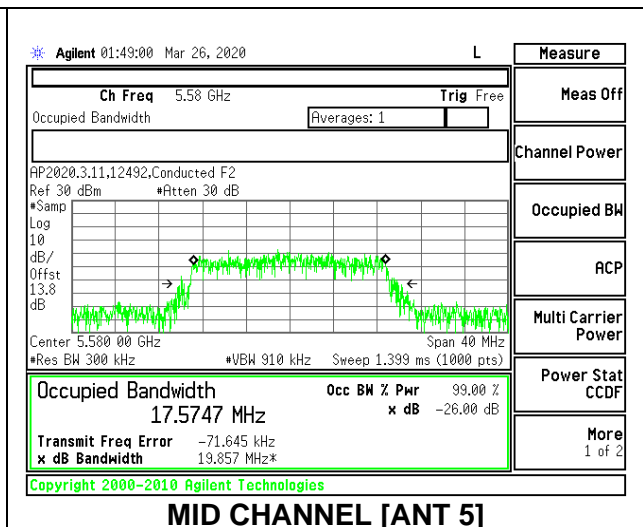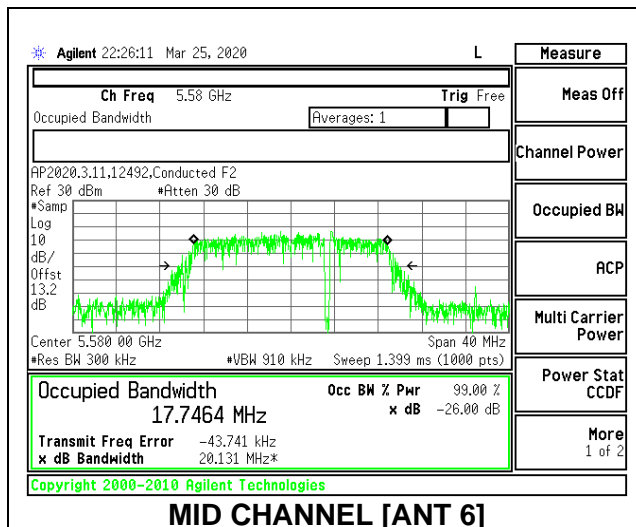

8.2.14. 802.11n HT40 MODE IN THE 5.6 GHz BAND



1TX Antenna 6 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	42.60	36.1454
Mid	5550	42.30	36.1037
High	5670	42.60	36.0907
142	5710	42.30	35.8713

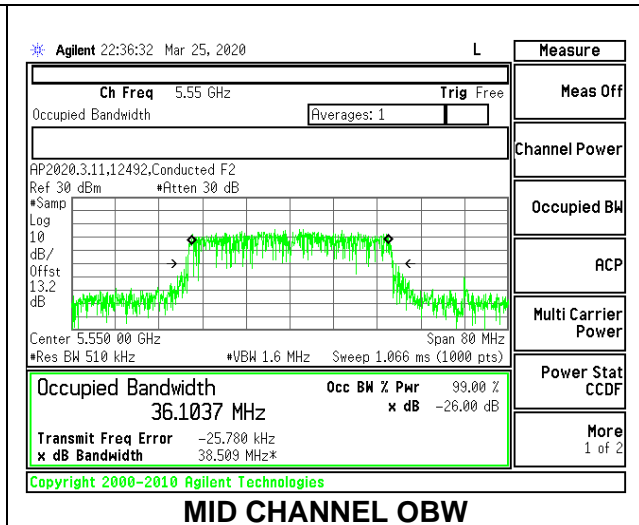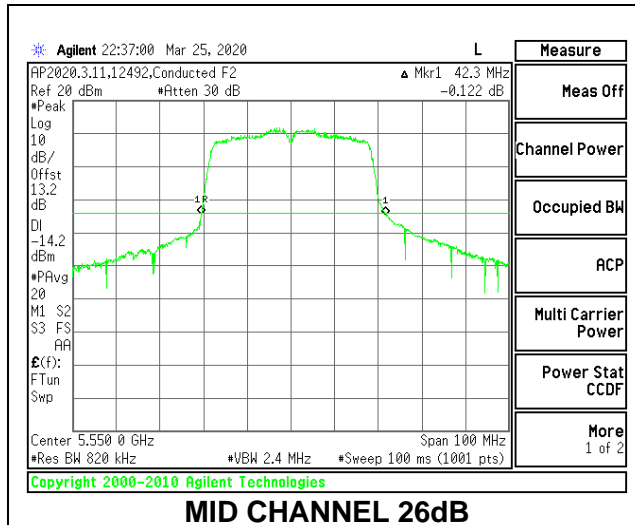

1TX Antenna 5 MODE


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	42.80	36.1541
Mid	5550	43.10	36.1638
High	5670	43.50	36.1141
142	5710	42.90	36.0702

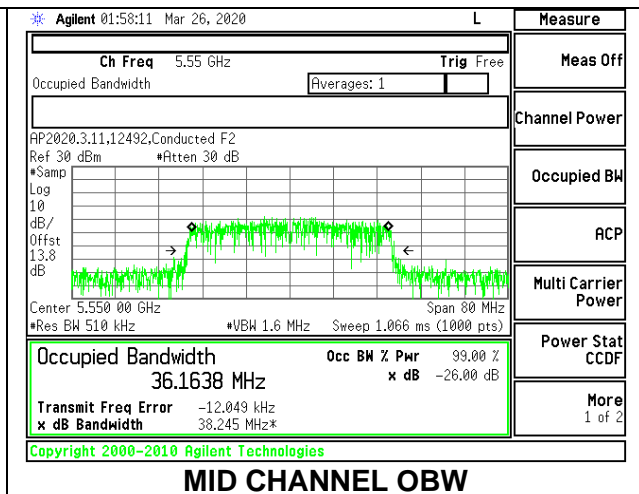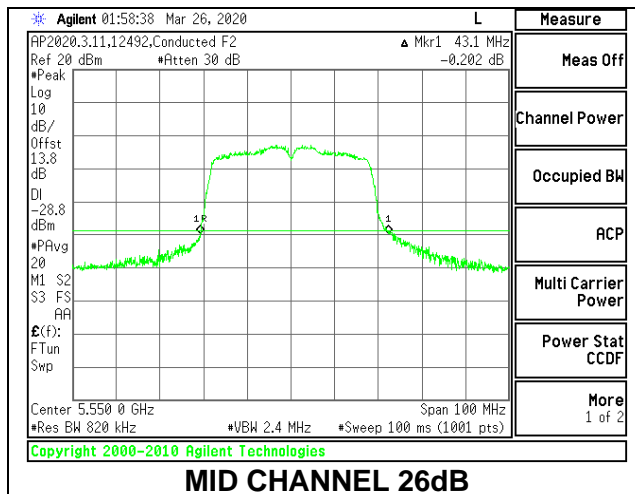


2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	42.30	40.90	36.0447	36.1603
Mid	5550	42.70	40.90	35.8971	36.1922
High	5670	42.40	40.80	36.1289	36.1165
142	5710	42.50	40.60	35.8881	36.1717

MID CHANNEL 26dB

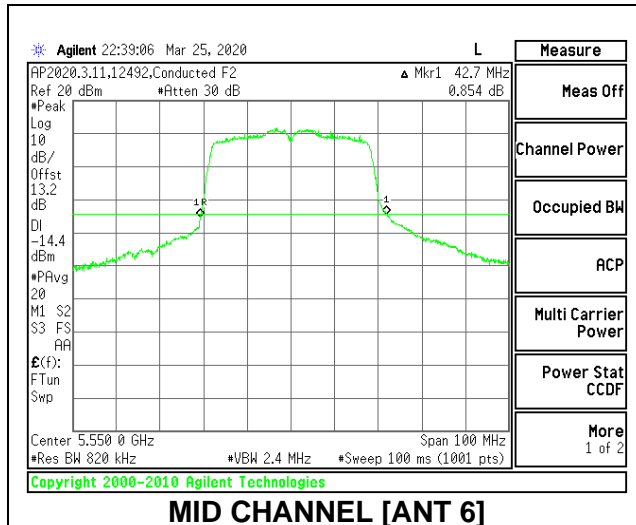


MID CHANNEL [ANT 6]

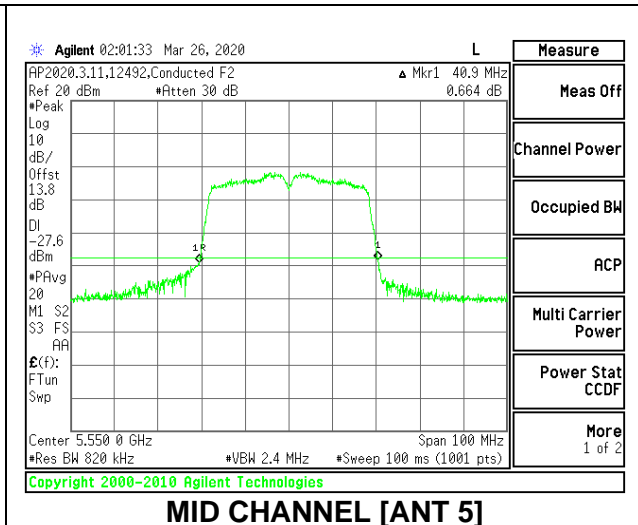


MID CHANNEL [ANT 5]

MID CHANNEL OBW

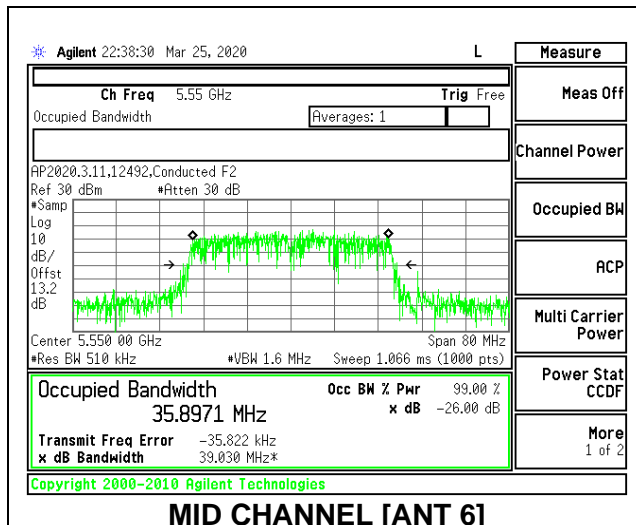

MID CHANNEL [ANT 6]


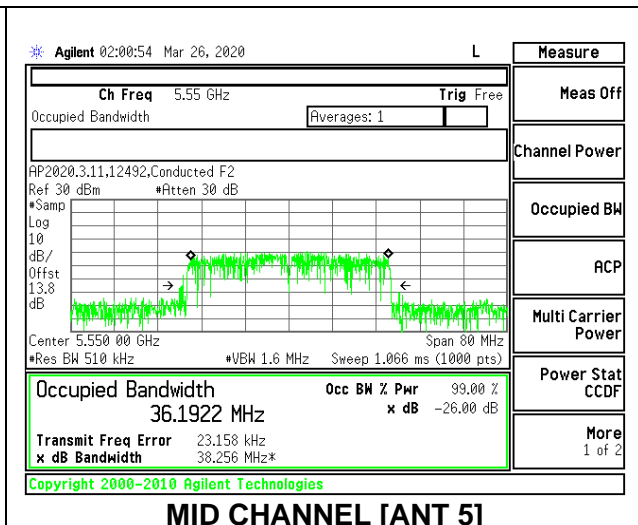


MID CHANNEL [ANT 5]

8.2.15. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND



1TX Antenna 6 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	83.40	75.3165
High	5610	83.40	75.3414
138	5690	83.00	75.0711

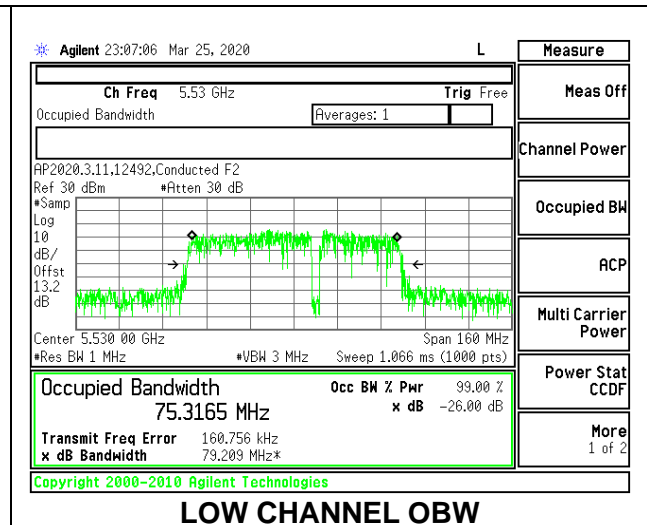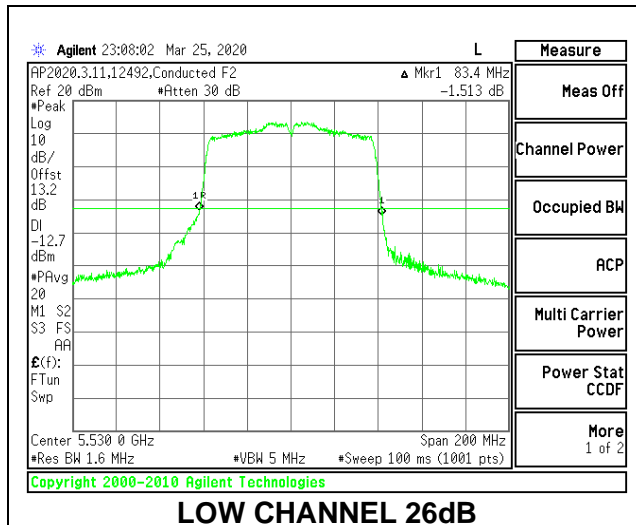

1TX Antenna 5 MODE



Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	84.20	75.0397
High	5610	84.60	75.0487
138	5690	85.00	75.6880

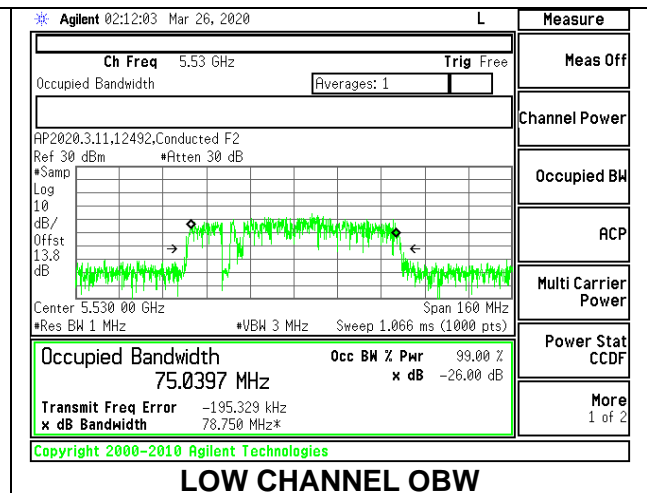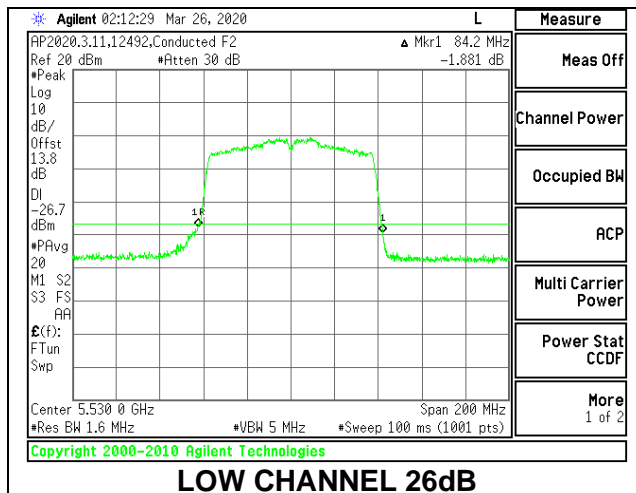



2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	83.40	82.80	75.4745	75.1268
High	5610	83.40	83.00	75.1559	75.1514
138	5690	83.20	83.00	75.3151	75.7309

LOW CHANNEL 26dB

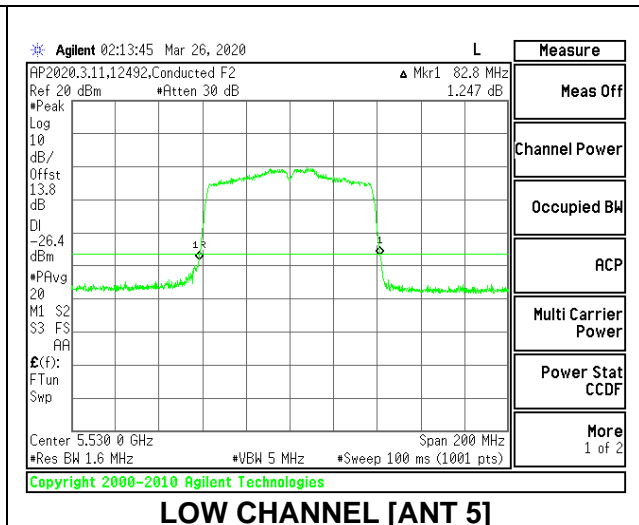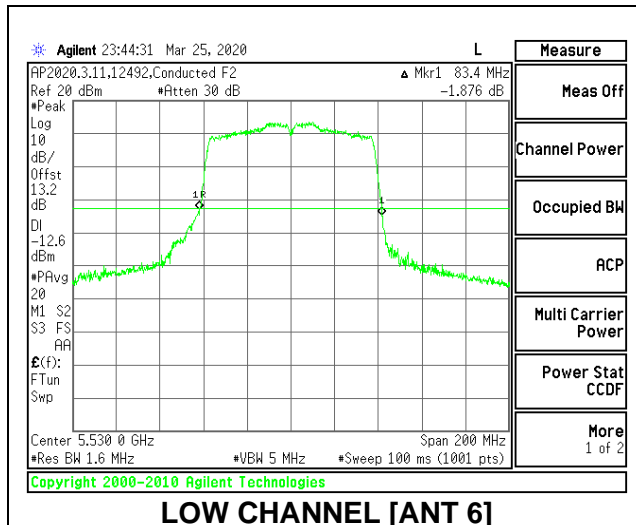



LOW CHANNEL OBW

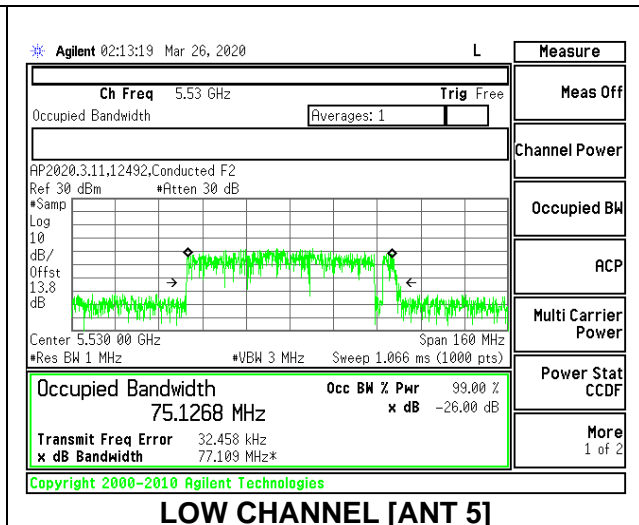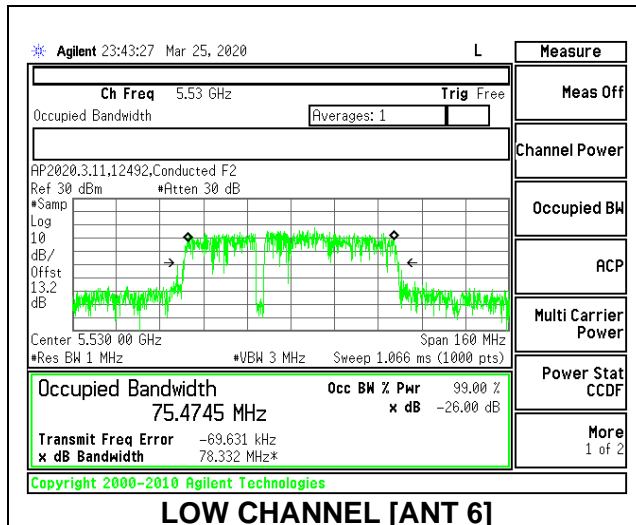

8.2.16. 802.11ax HE20 MODE IN THE 5.6 GHz BAND



1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	20.50	18.3589
Mid	5580	20.20	18.4228
High	5700	20.25	18.3896
144	5720	20.20	18.3778

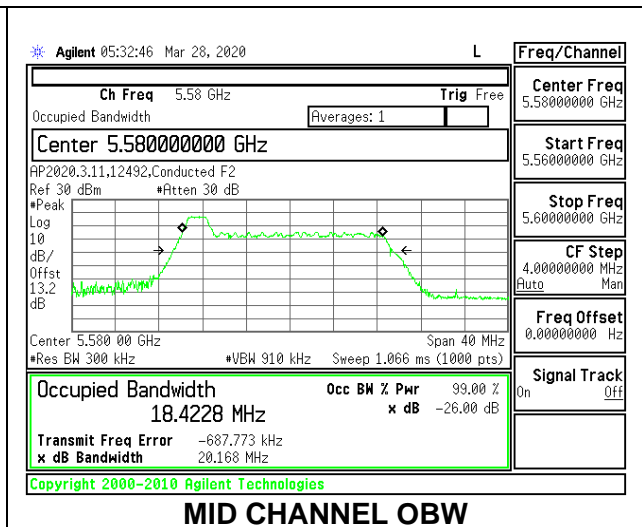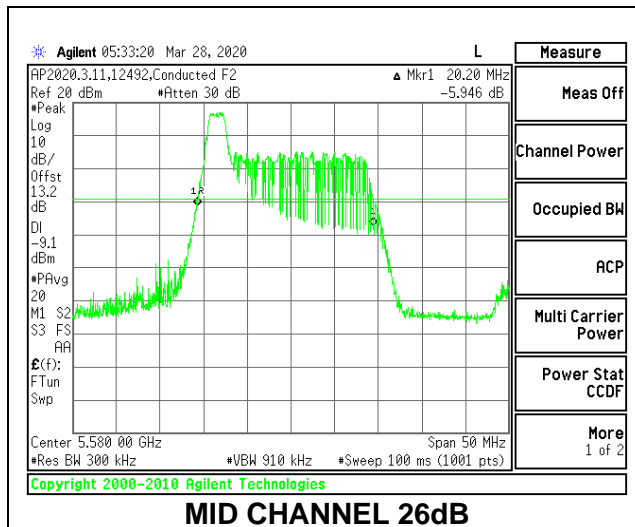



1TX Antenna 6 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	19.50	17.0229
Mid	5580	19.35	17.2967
High	5700	19.40	17.3066
144	5720	19.45	17.2337

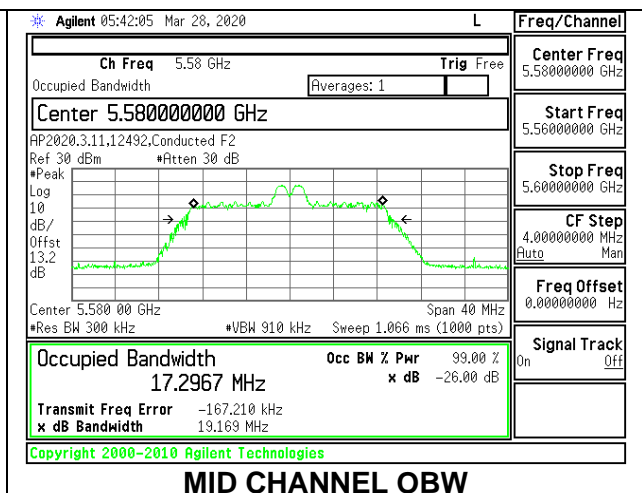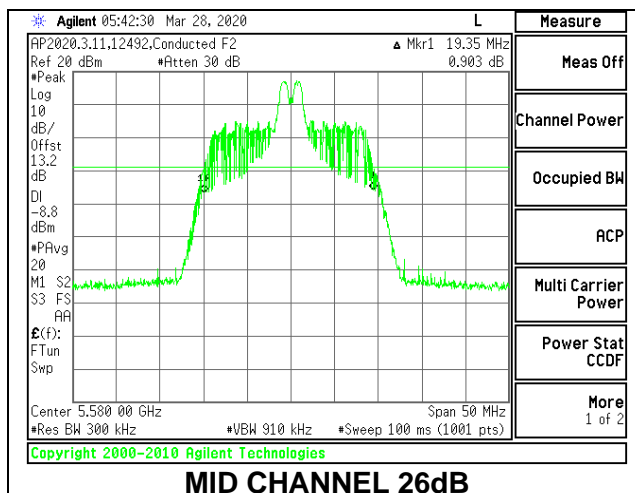



1TX Antenna 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	20.75	18.6503
Mid	5580	20.65	18.7717
High	5700	20.75	18.5866
144	5720	20.85	18.6405

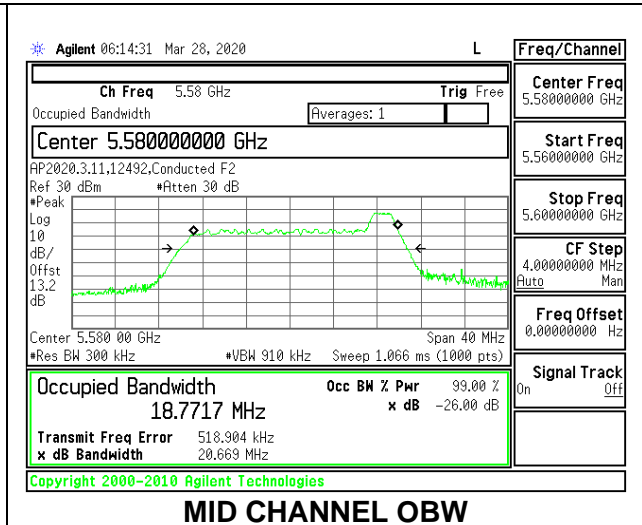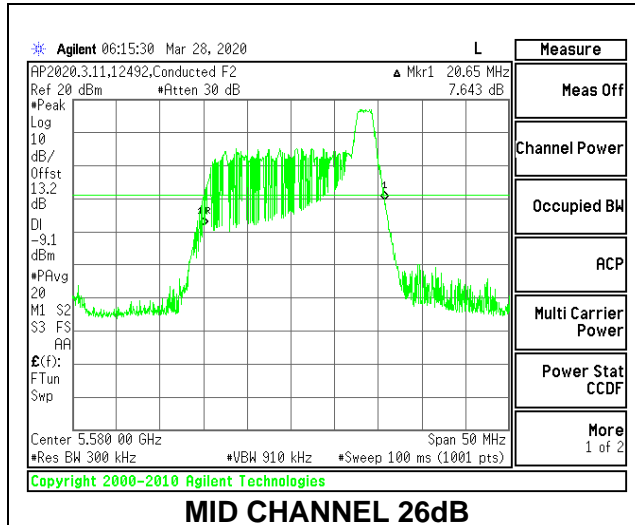



1TX Antenna 6 MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	21.55	18.8071
Mid	5580	21.40	18.8064
High	5700	21.55	18.8198
144	5720	21.55	18.8604

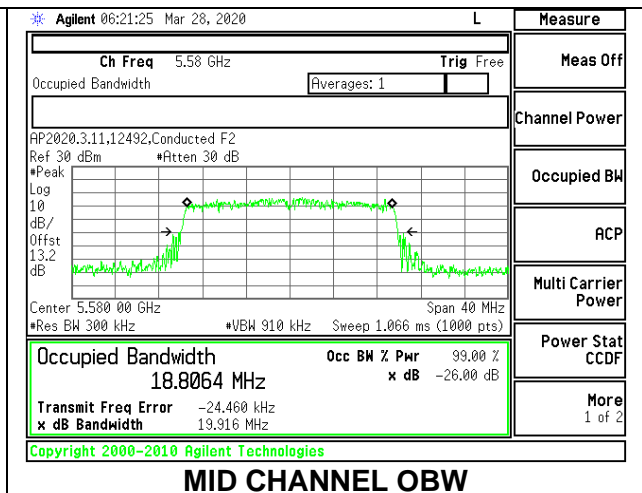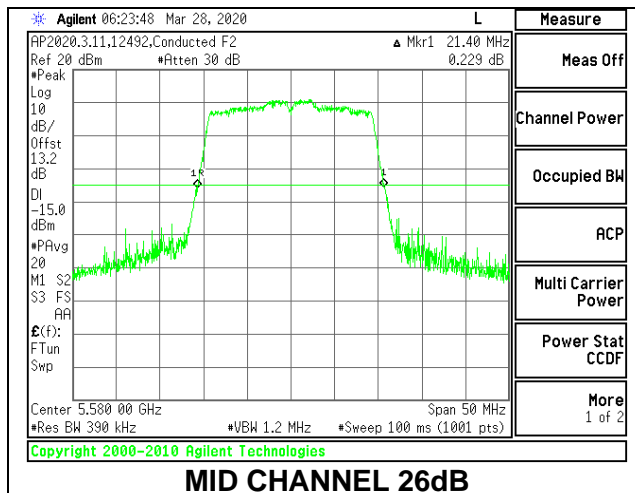



1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	20.20	18.3907
Mid	5580	20.30	18.3539
High	5700	20.20	18.2602
144	5720	20.20	18.3548

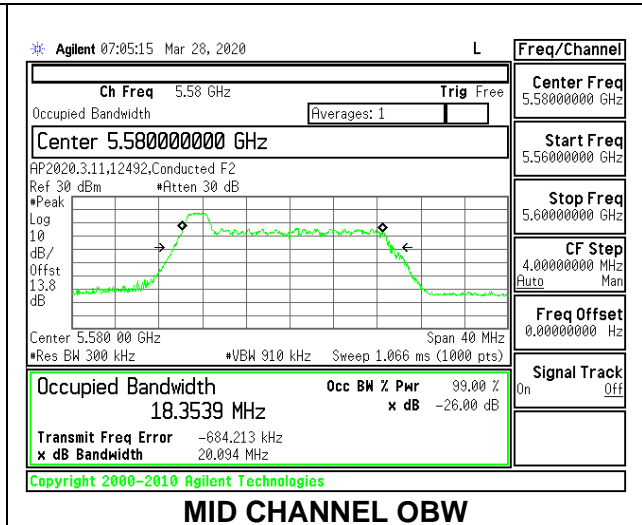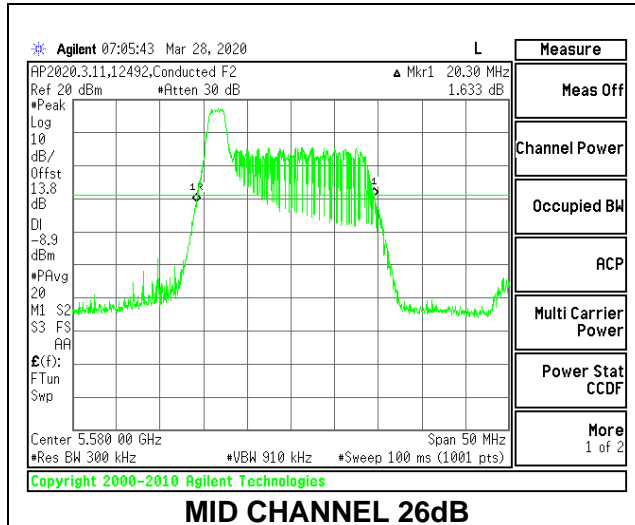



1TX Antenna 5 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	19.35	17.2387
Mid	5580	19.40	17.3232
High	5700	19.35	17.1966
144	5720	19.45	17.2647

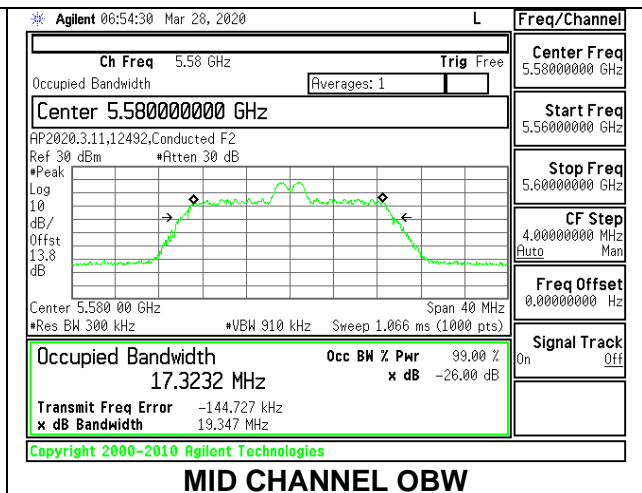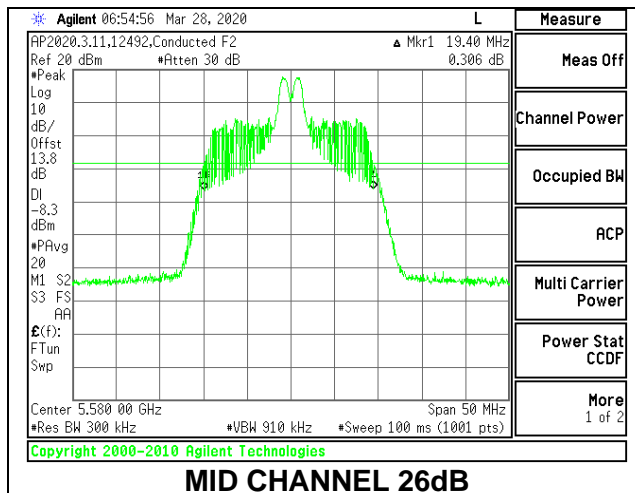



1TX Antenna 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	20.80	18.7139
Mid	5580	20.70	18.7449
High	5700	20.85	18.6130
144	5720	20.65	18.7775

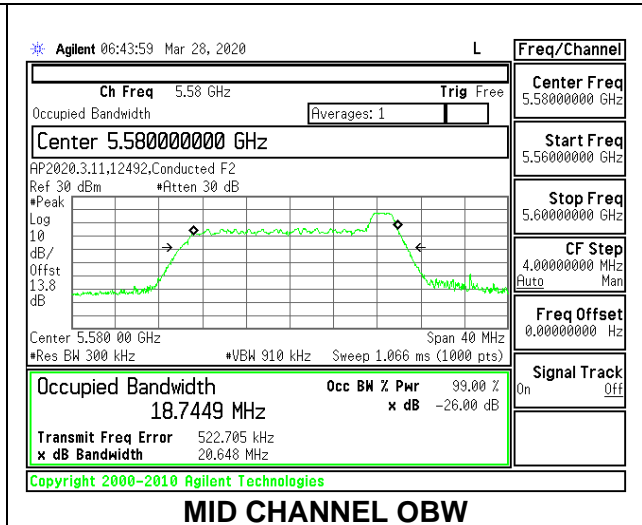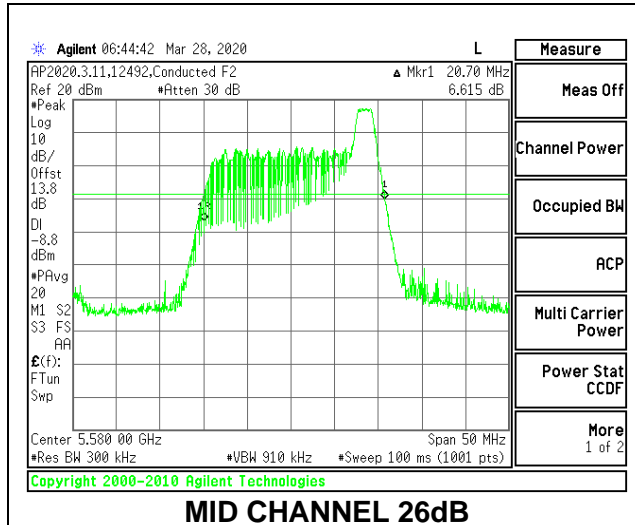

1TX Antenna 5 MODE: 242 Tones, RU Index 61



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	21.45	18.7662
Mid	5580	21.40	18.8503
High	5700	21.55	18.8409
144	5720	21.45	18.8901

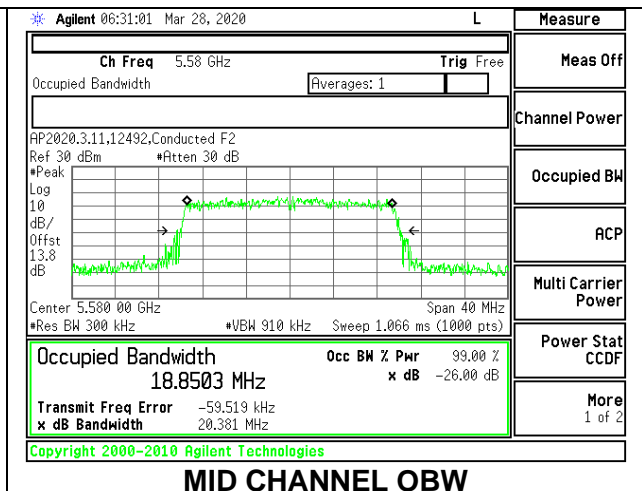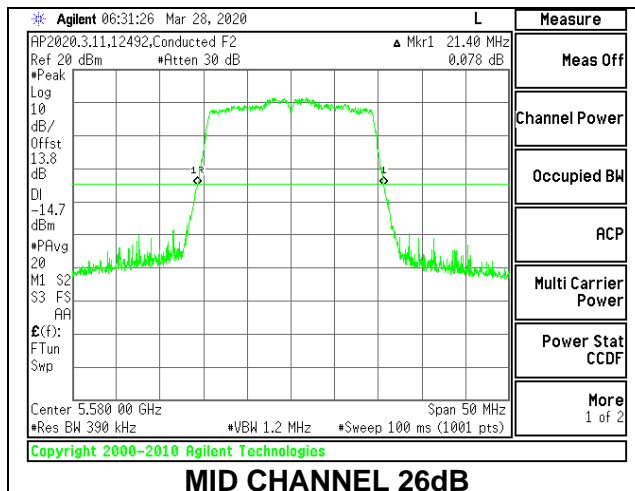



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	20.15	19.80	18.4087	18.2976
Mid	5580	20.30	19.80	18.4599	17.8612
High	5700	20.15	20.15	18.4047	18.3519
144	5720	20.10	19.80	18.3631	18.2960

MID CHANNEL 26dB

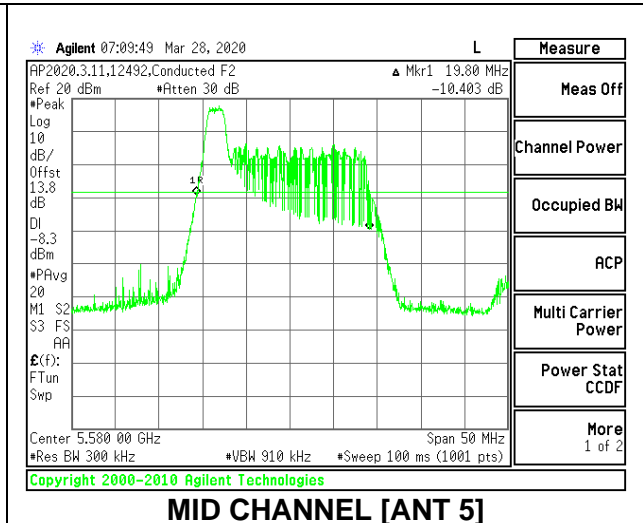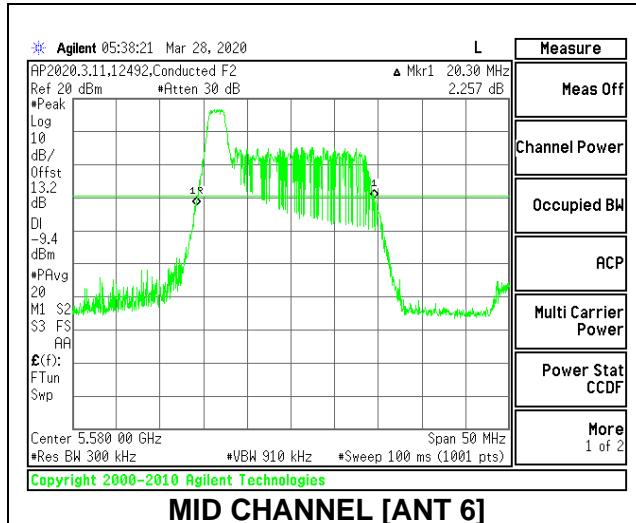



MID CHANNEL OBW

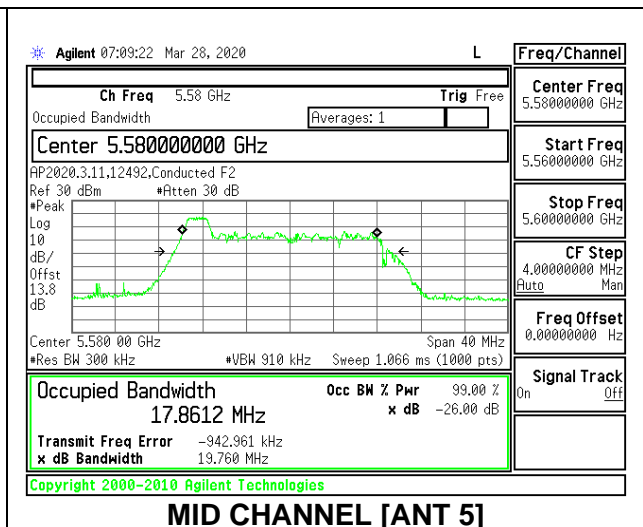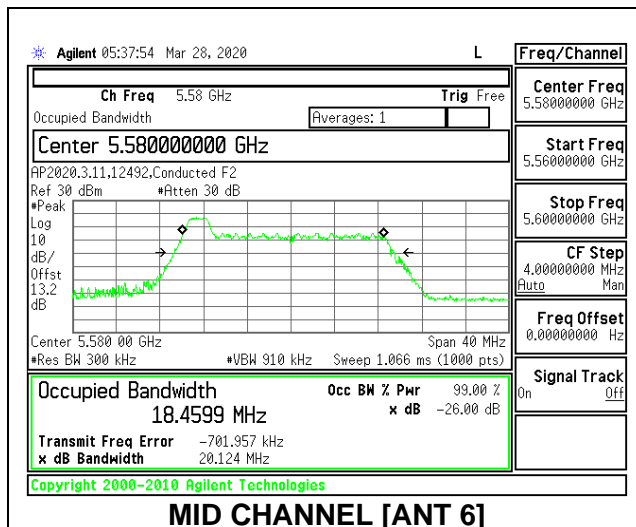



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	19.35	18.50	17.3067	16.9192
Mid	5580	19.45	18.40	17.2562	16.8934
High	5700	19.45	18.40	17.3393	16.9755
144	5720	19.40	18.35	17.1304	16.9769

MID CHANNEL 26dB

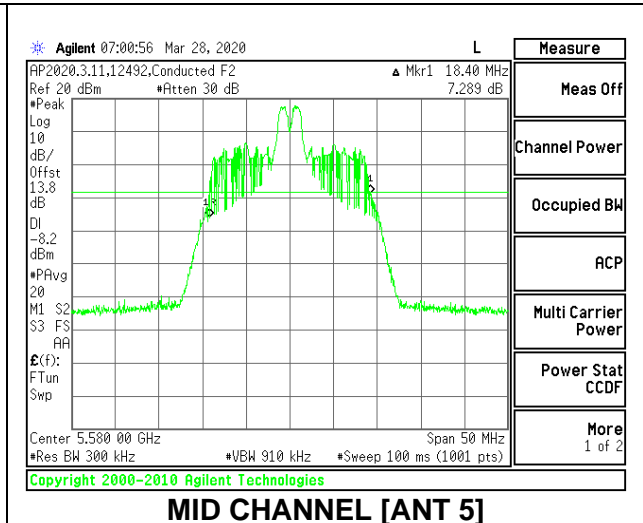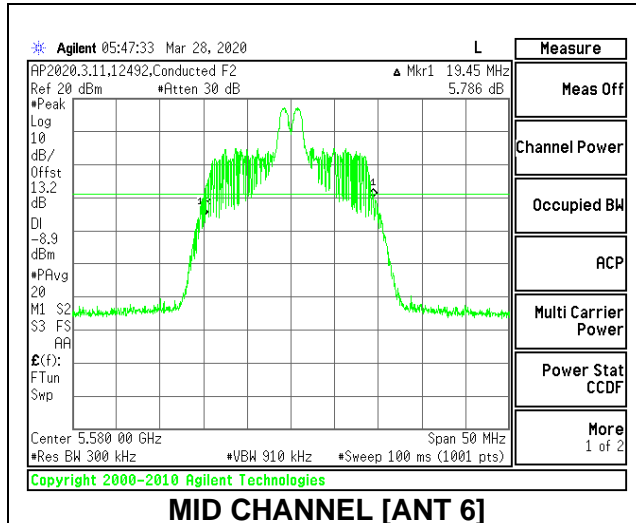



MID CHANNEL OBW

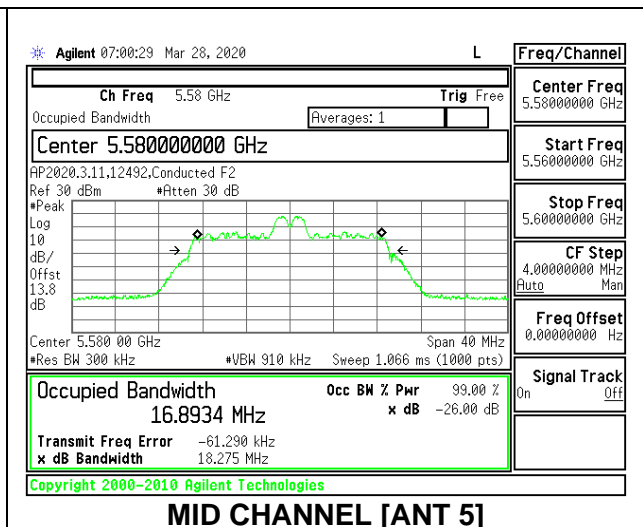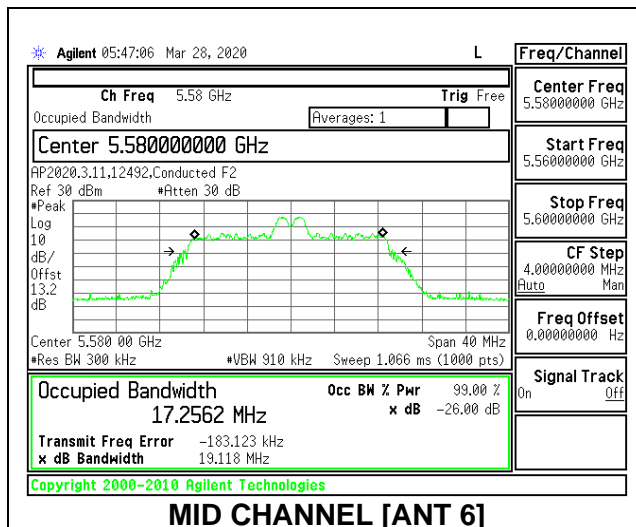



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	20.70	19.95	18.6222	18.2645
Mid	5580	20.75	19.90	18.5834	18.3149
High	5700	20.60	20.05	18.5091	18.3578
144	5720	20.85	20.00	18.6604	18.3596

MID CHANNEL 26dB

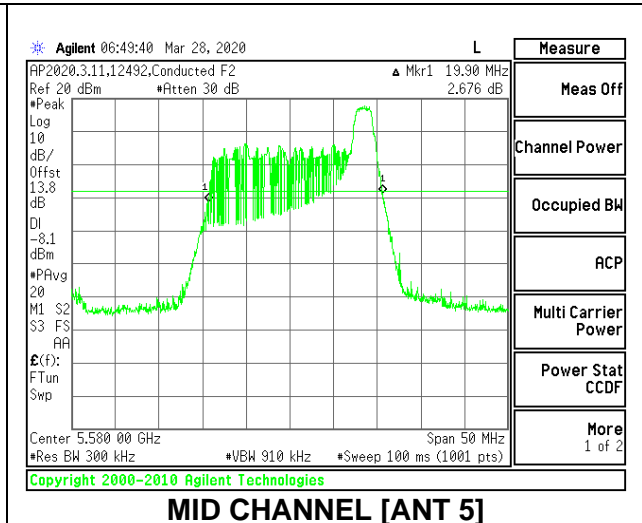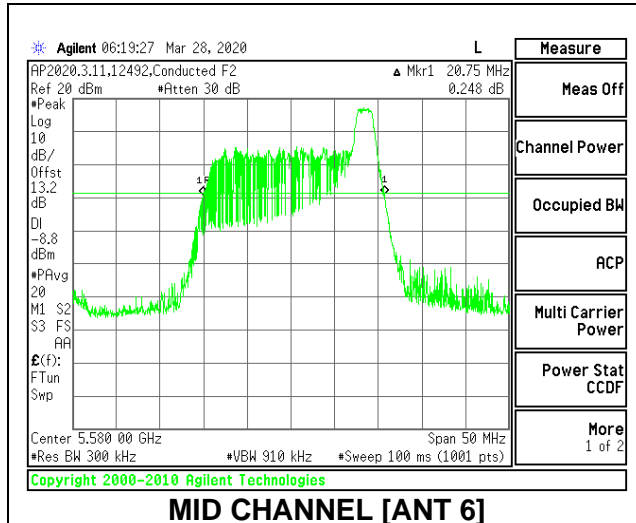


MID CHANNEL OBW

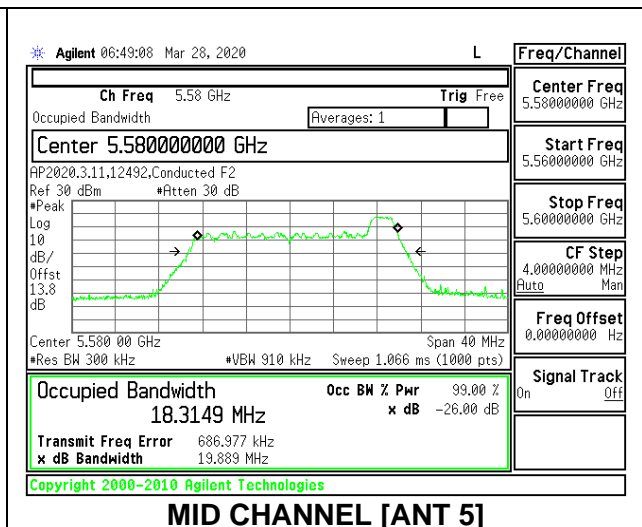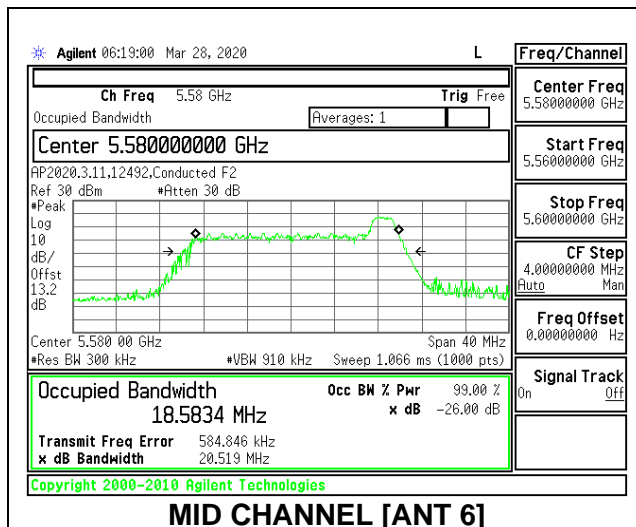


2TX Antenna 6 + Antenna 5 CDD MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	21.50	21.30	18.8480	18.8960
Mid	5580	21.40	21.20	18.8289	18.8500
High	5700	21.55	21.35	18.8702	18.9127
144	5720	21.60	21.20	18.7823	18.8925

MID CHANNEL 26dB

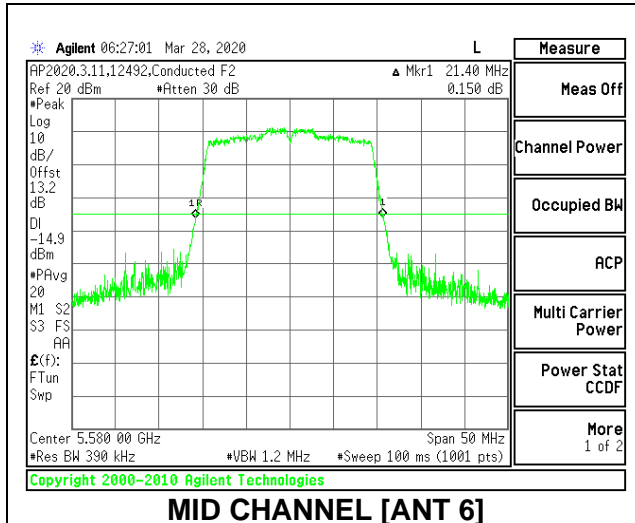


MID CHANNEL [ANT 6]

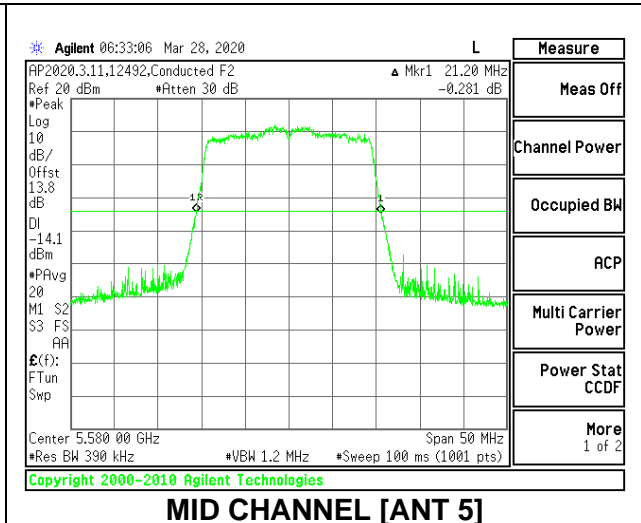


MID CHANNEL [ANT 5]

MID CHANNEL OBW

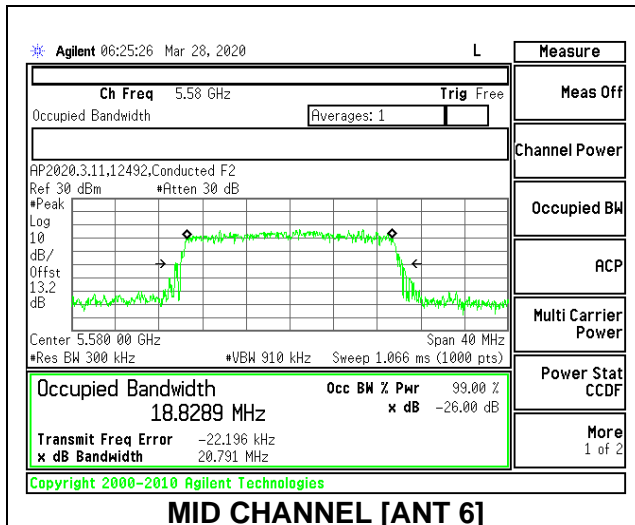

MID CHANNEL [ANT 6]


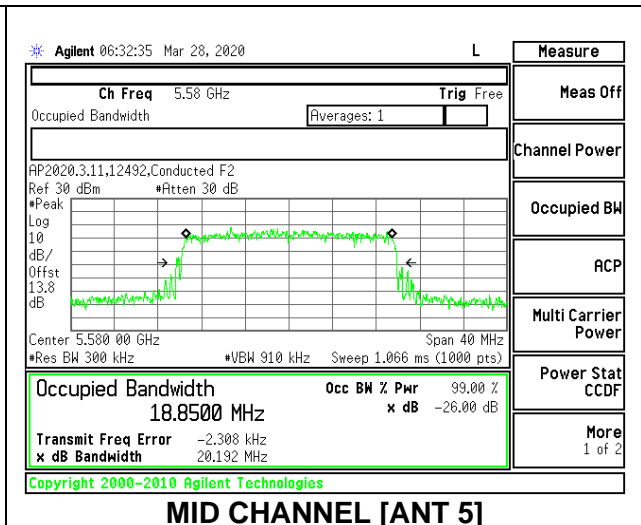


MID CHANNEL [ANT 5]

8.2.17. 802.11ax HE40 MODE IN THE 5.6 GHz BAND



1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	20.20	18.8156
Mid	5550	20.20	18.7579
High	5670	20.40	18.4466
142	5710	20.40	18.3844

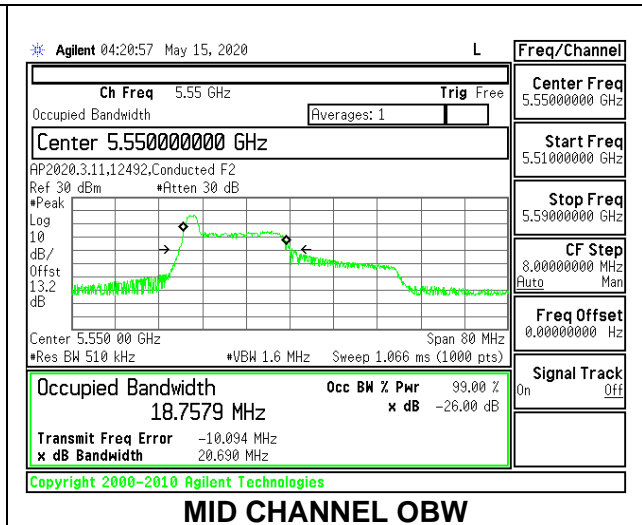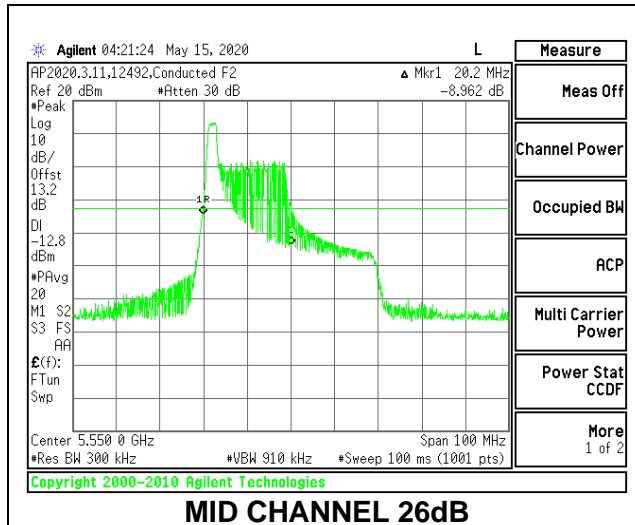



1TX Antenna 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	23.00	21.9321
Mid	5550	23.10	21.6990
High	5670	22.90	21.1478
142	5710	22.50	22.0043

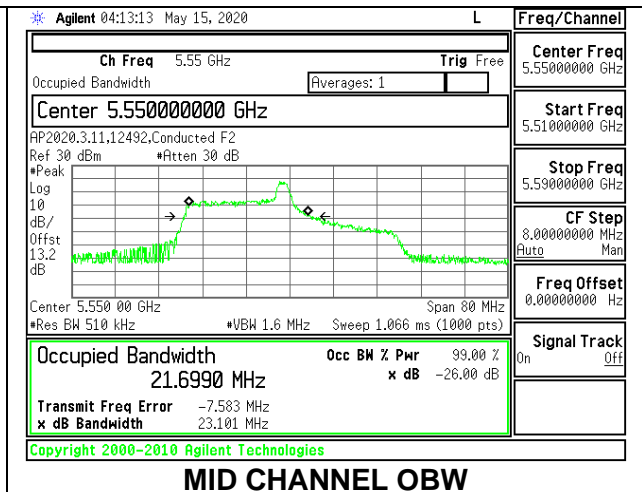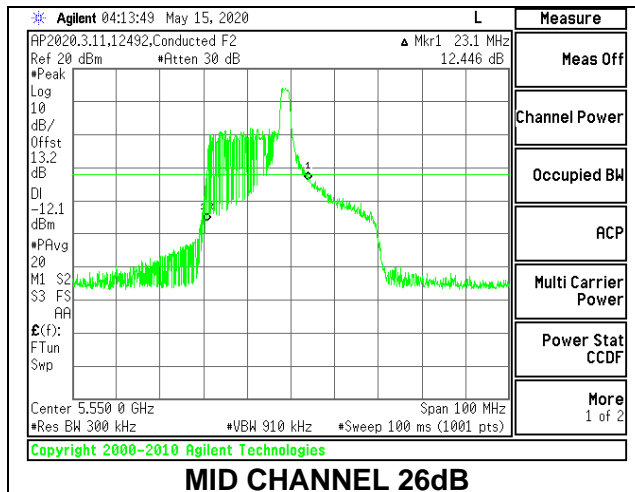



1TX Antenna 6 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	20.20	19.0235
Mid	5550	20.30	19.1975
High	5670	20.20	18.5111
142	5710	20.50	18.6305

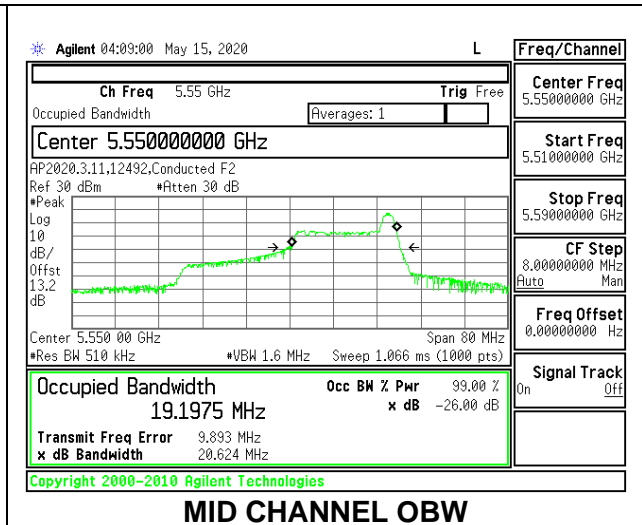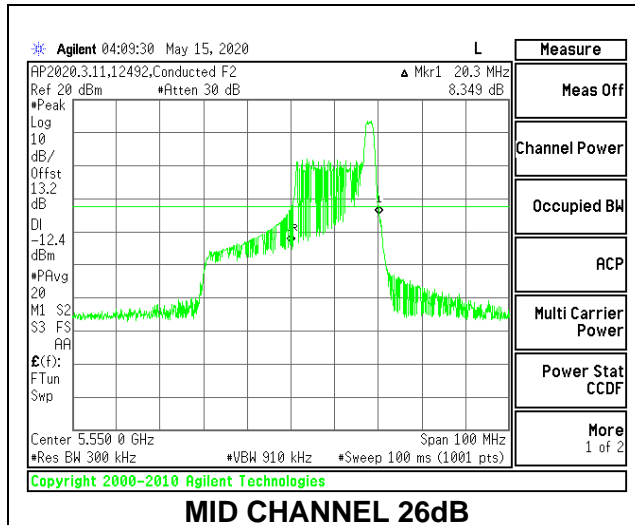



1TX Antenna 6 MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	41.10	37.4841
Mid	5550	41.00	37.3937
High	5670	41.00	37.3807
142	5710	40.90	37.4268

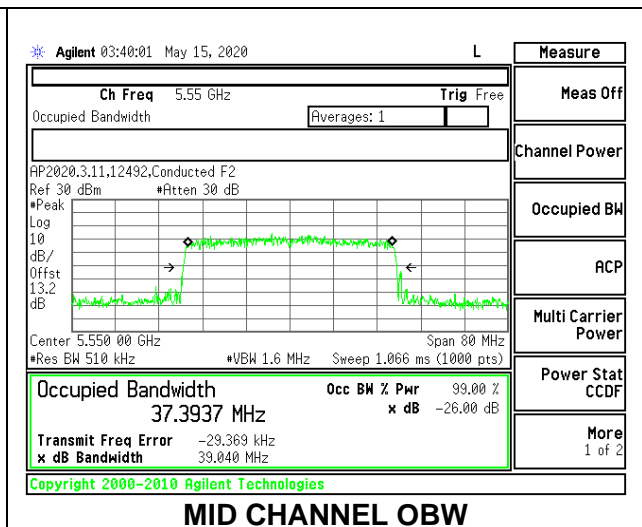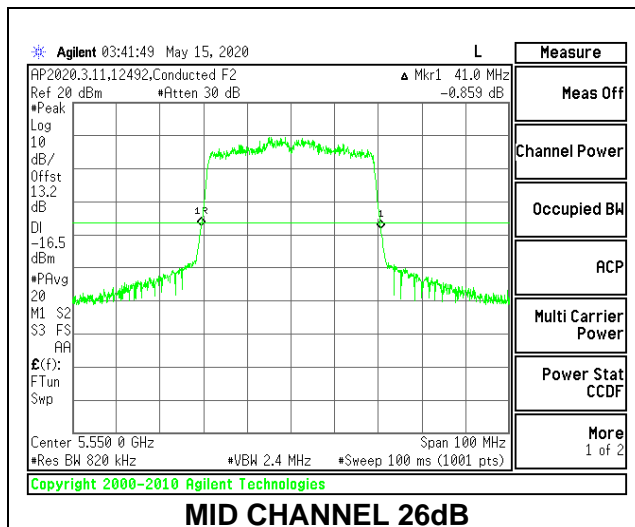



1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	20.10	18.5108
Mid	5550	20.30	18.7840
High	5670	20.40	18.3476
142	5710	20.10	18.3904

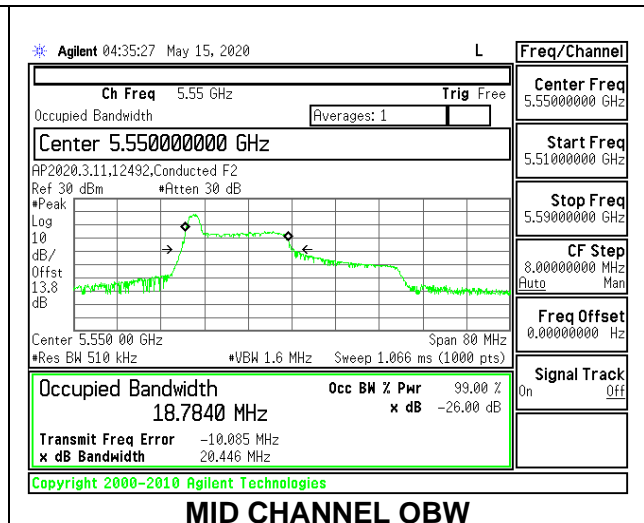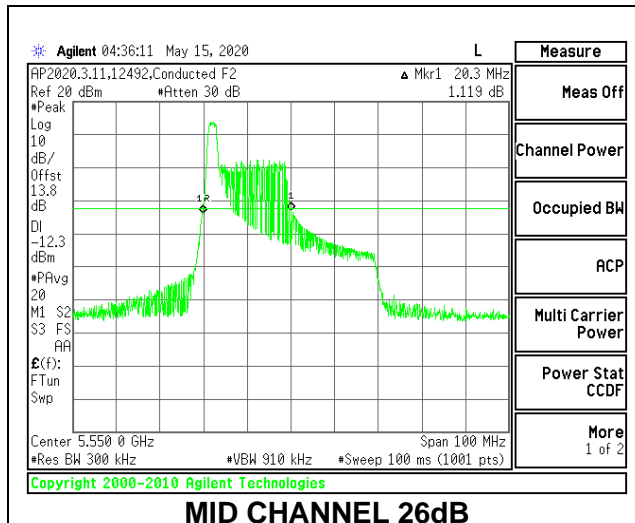



1TX Antenna 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	23.20	22.0977
Mid	5550	22.80	22.1336
High	5670	22.70	21.6447
142	5710	23.30	21.8523

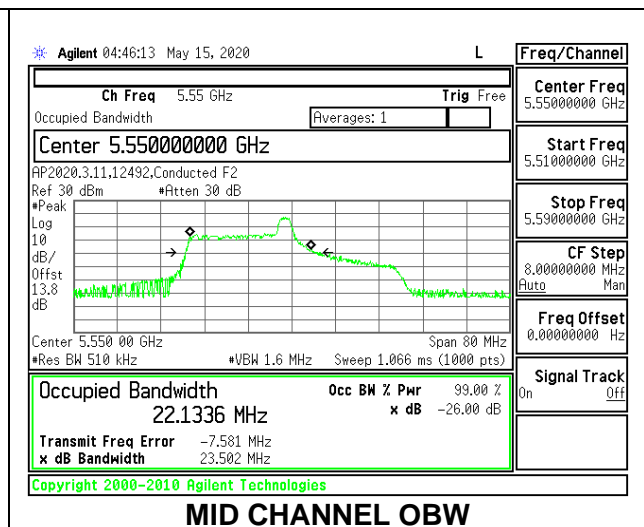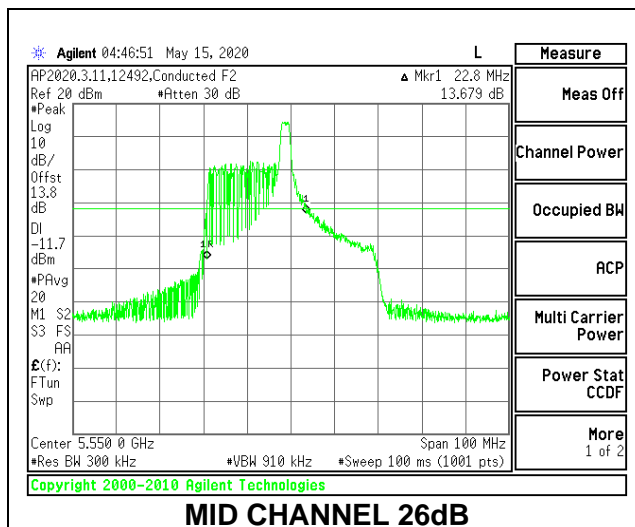



1TX Antenna 5 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	20.50	18.5623
Mid	5550	20.30	18.6974
High	5670	20.30	19.0702
142	5710	20.60	19.0988

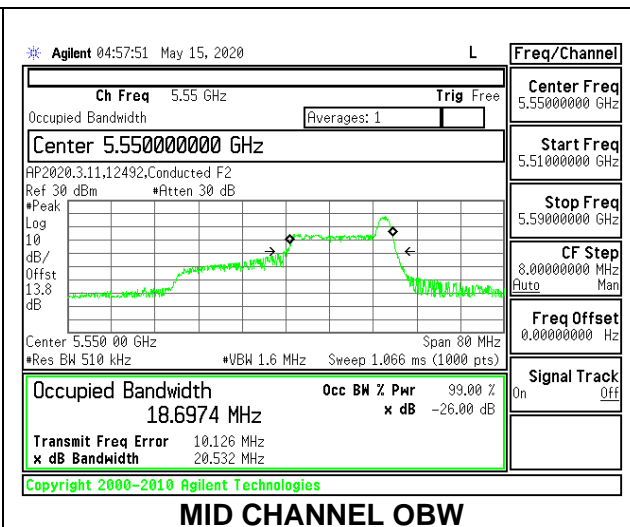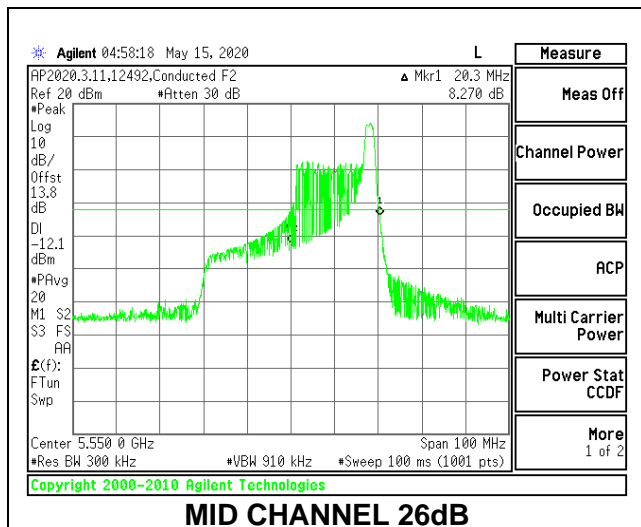

1TX Antenna 5 MODE: 484 Tones, RU Index 65



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	40.90	37.3878
Mid	5550	41.00	37.4767
High	5670	41.20	37.4809
142	5710	41.00	37.3472

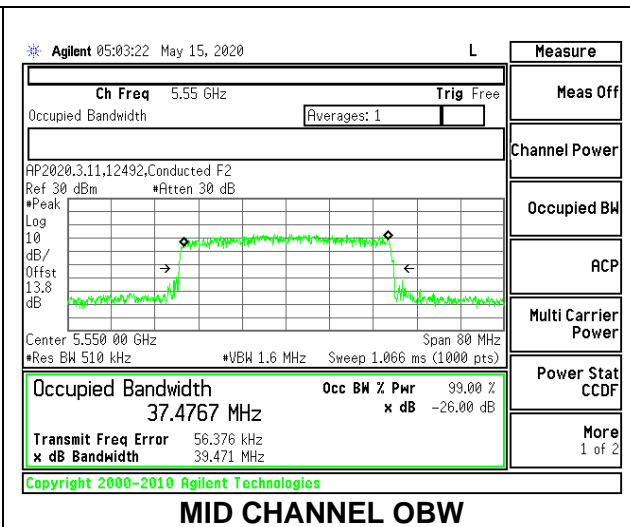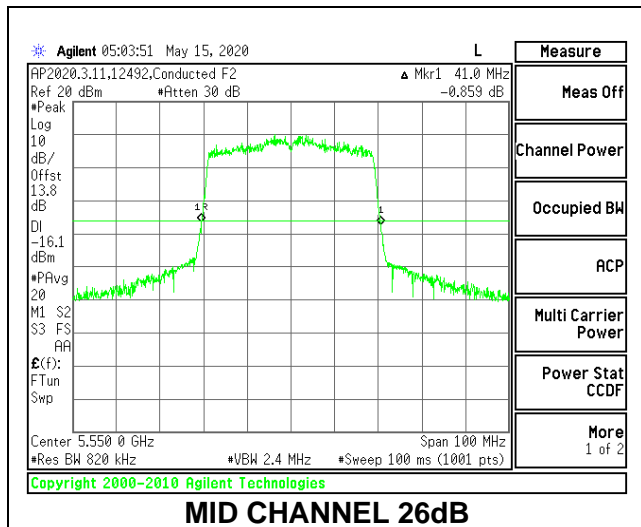



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	20.30	19.50	18.4353	18.3030
Mid	5550	20.50	19.70	18.5522	18.2977
High	5670	20.30	19.70	18.4553	18.2075
142	5710	20.40	20.20	18.4811	18.4614

MID CHANNEL 26dB

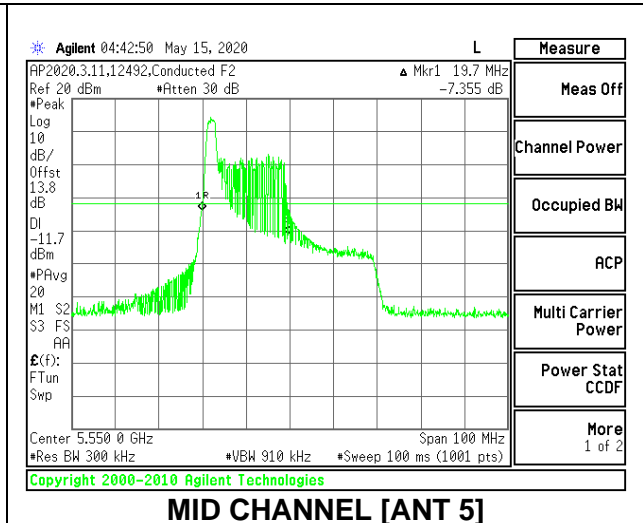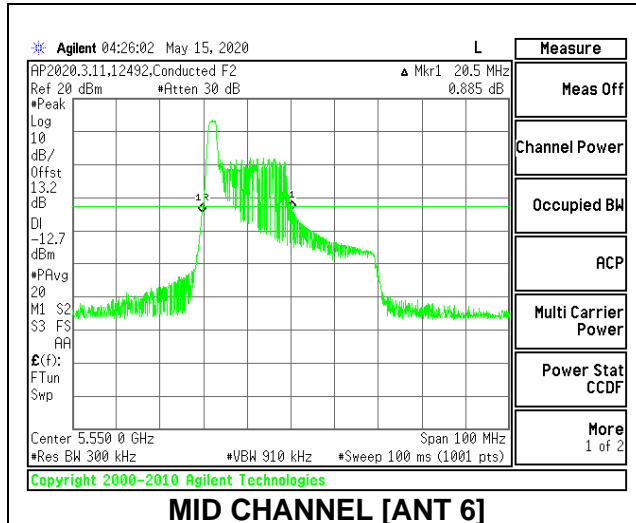



MID CHANNEL OBW

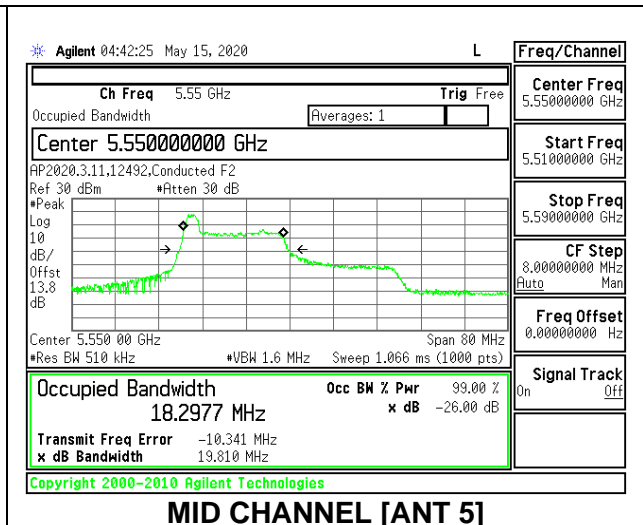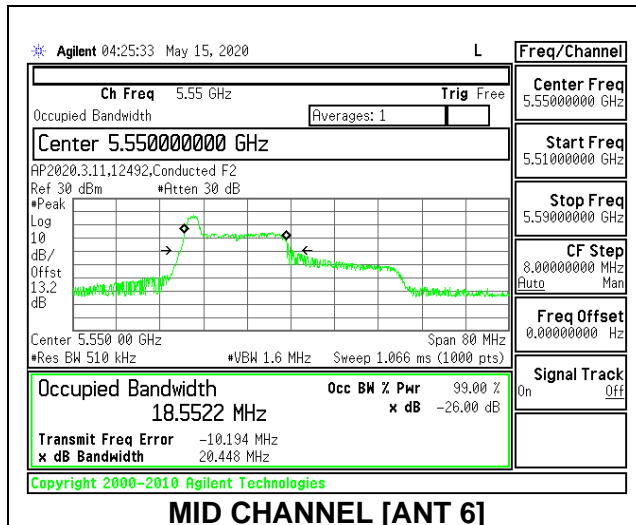



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	22.60	21.80	21.9811	21.2970
Mid	5550	23.60	22.50	22.2185	21.6746
High	5670	22.80	22.20	21.1909	21.4815
142	5710	23.30	22.40	21.5074	21.1842

MID CHANNEL 26dB

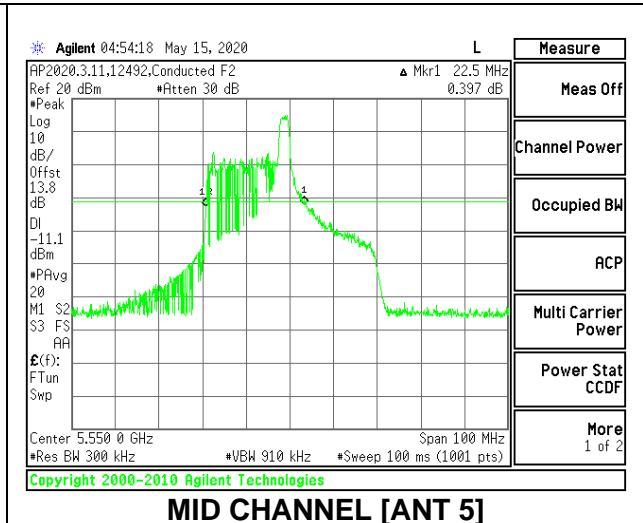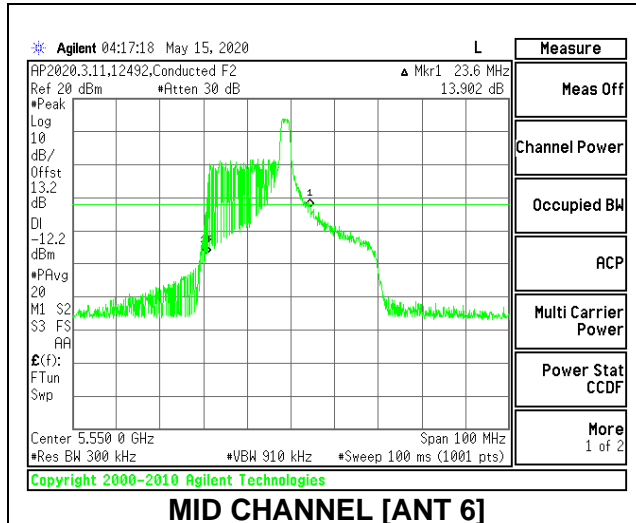



MID CHANNEL OBW

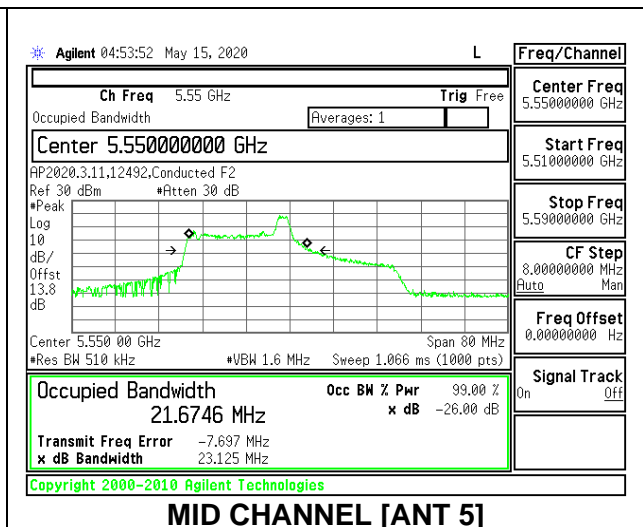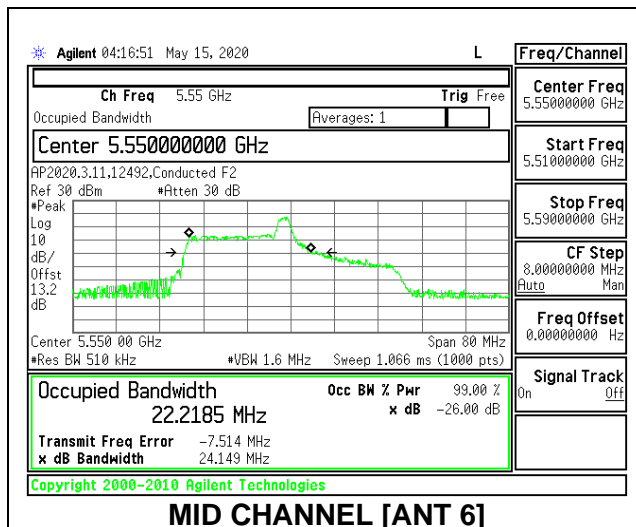



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	20.20	19.40	19.2943	18.3133
Mid	5550	20.40	19.40	18.7651	18.1763
High	5670	20.50	19.30	18.6379	18.2334
142	5710	20.70	19.50	18.5582	18.2564

MID CHANNEL 26dB

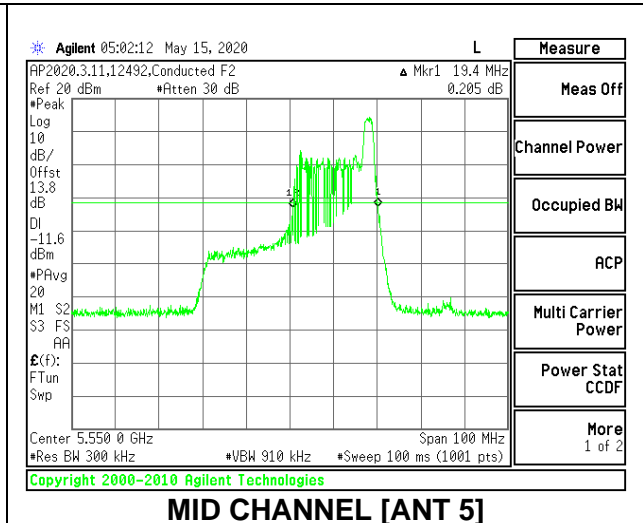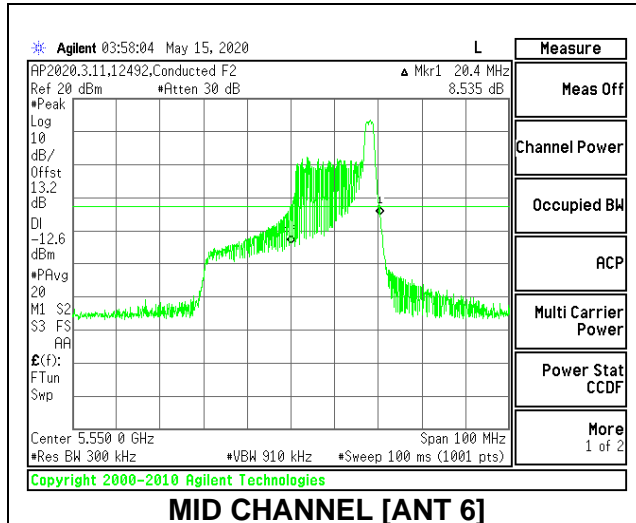



MID CHANNEL OBW

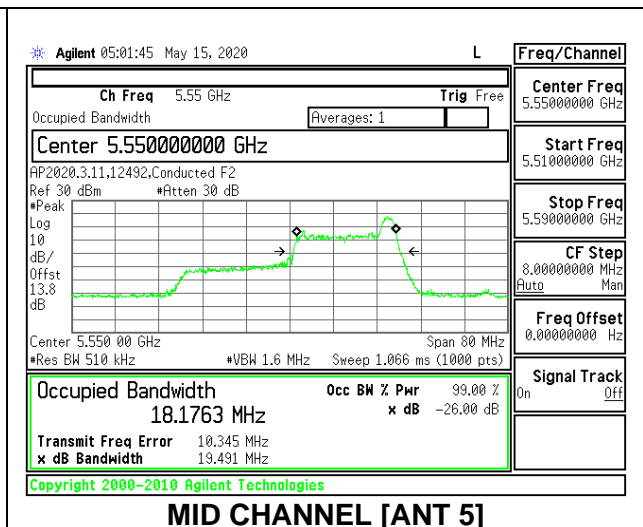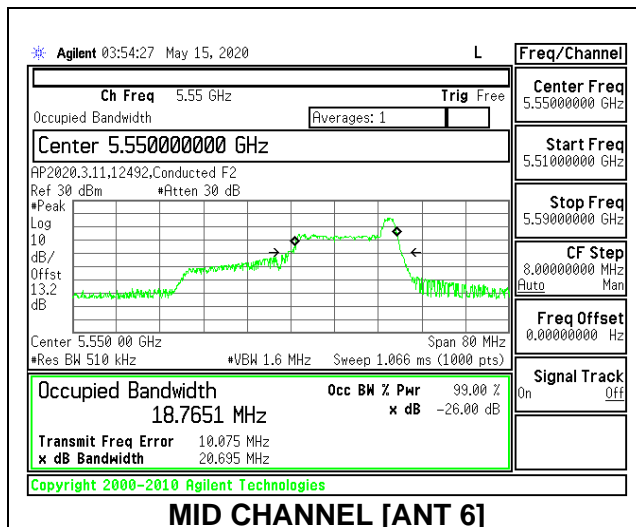



2TX Antenna 6 + Antenna 5 CDD MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	41.10	40.80	37.3785	37.6252
Mid	5550	41.10	40.90	37.4296	37.5213
High	5670	41.00	40.80	37.3918	37.4168
142	5710	40.90	40.90	37.5809	37.2724

MID CHANNEL 26dB

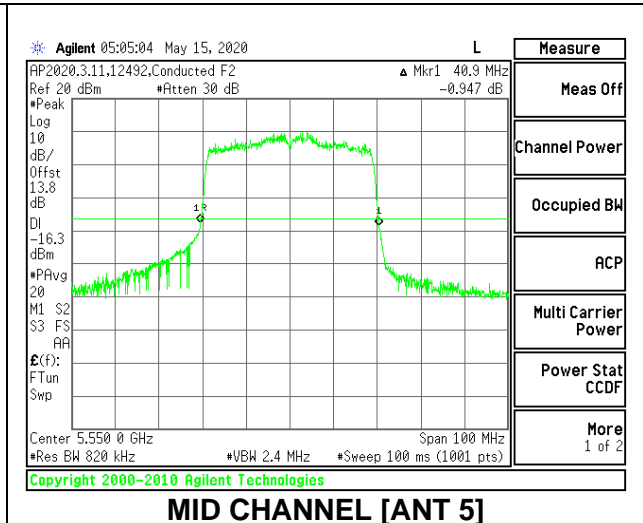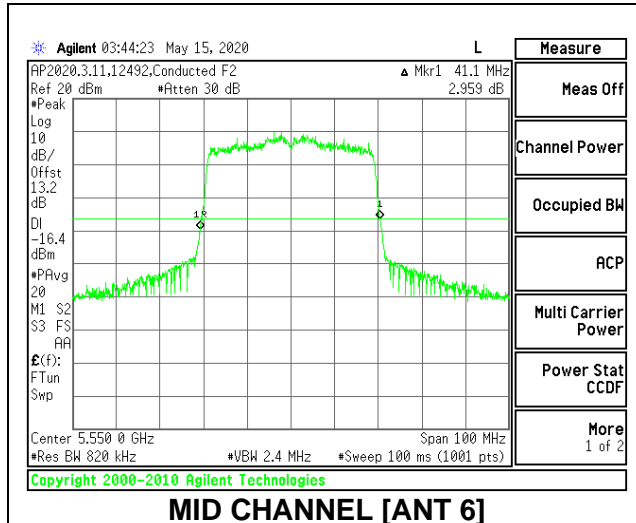



MID CHANNEL OBW

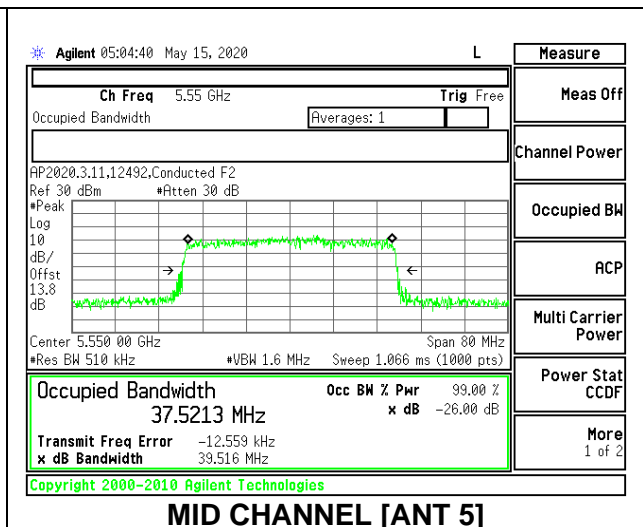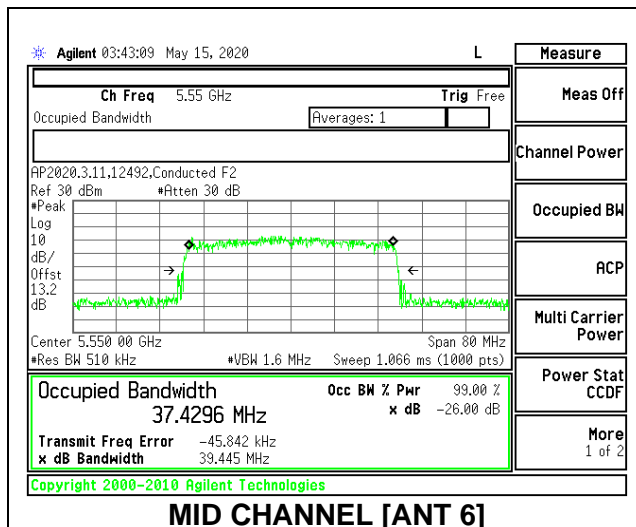

8.2.18. 802.11ax HE80 MODE IN THE 5.6 GHz BAND



1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	20.00	19.2218
High	5610	19.80	19.3352
138	5690	20.40	20.6365

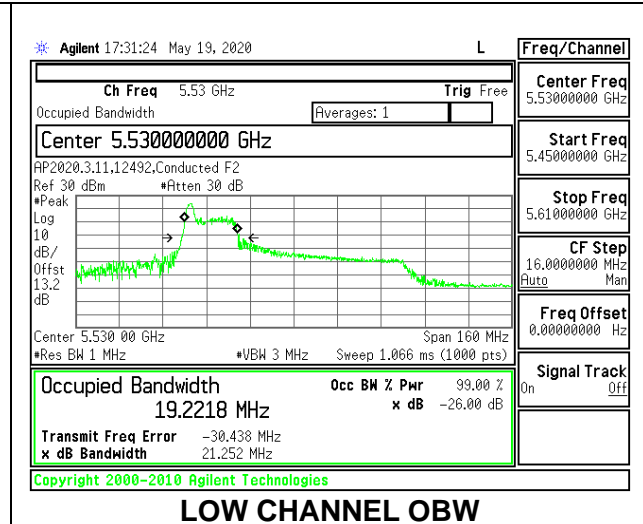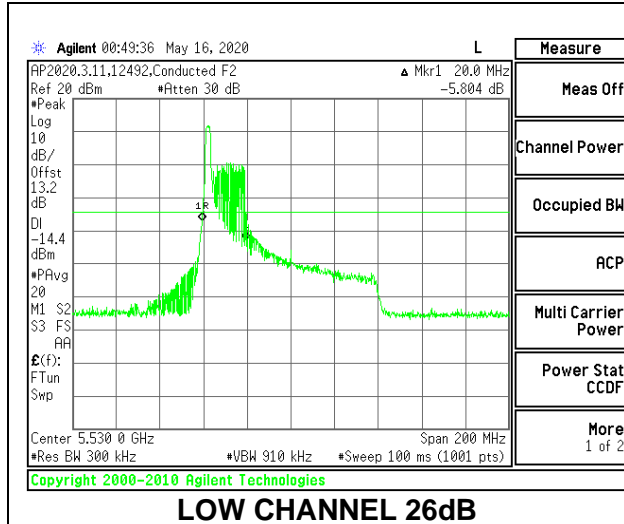



1TX Antenna 6 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	39.80	37.8125
High	5610	40.80	38.2351
138	5690	38.40	37.2419

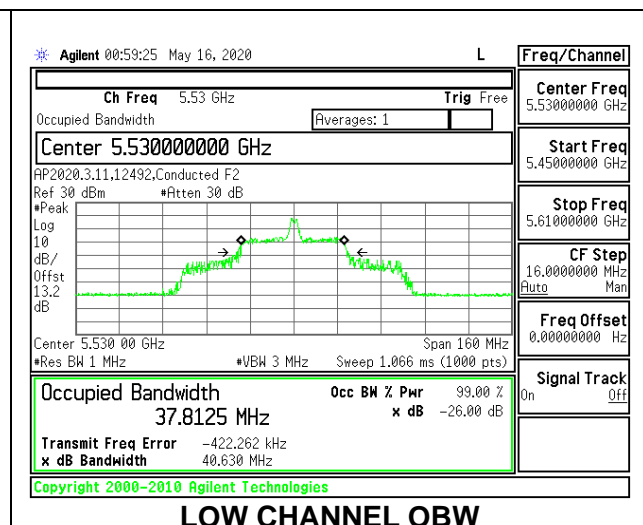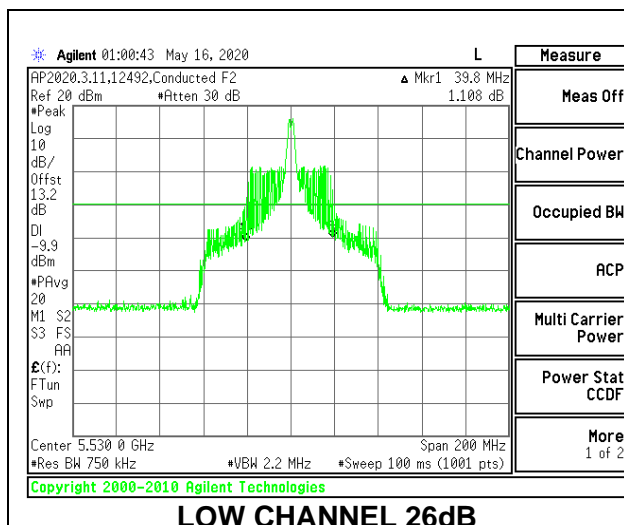



1TX Antenna 6 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	21.40	21.2629
High	5610	21.20	20.3387
138	5690	21.20	21.0175

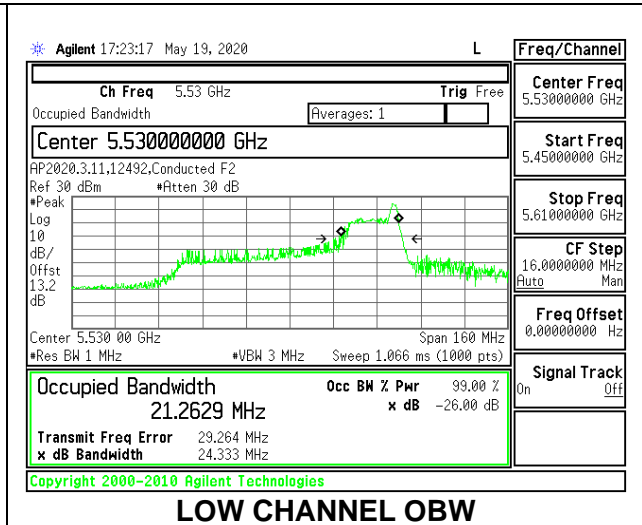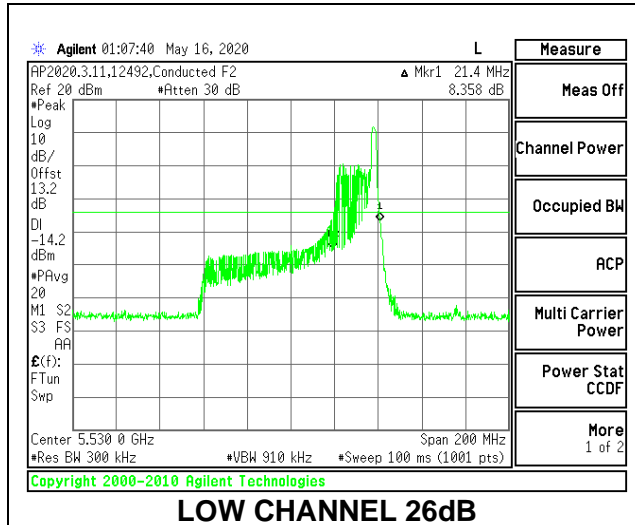



1TX Antenna 6 MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	83.00	76.5522
High	5610	83.40	76.3026
138	5690	83.00	76.3501

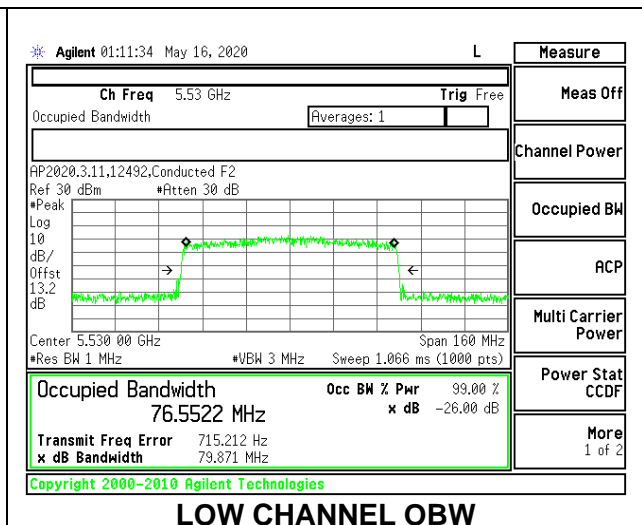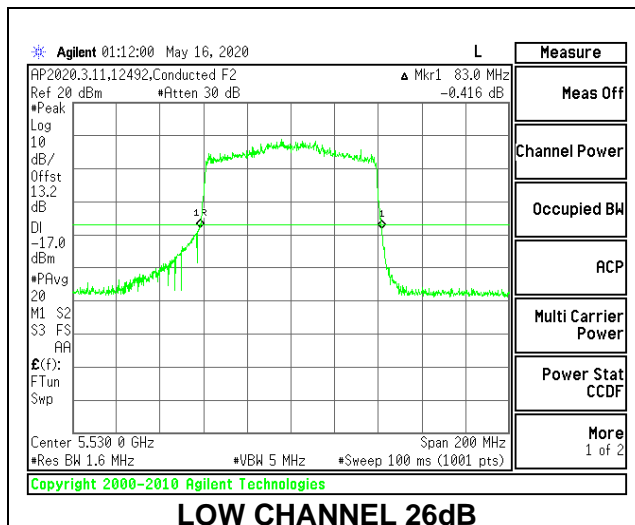



1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	19.80	19.3734
High	5610	19.80	19.5501
138	5690	19.80	19.6000

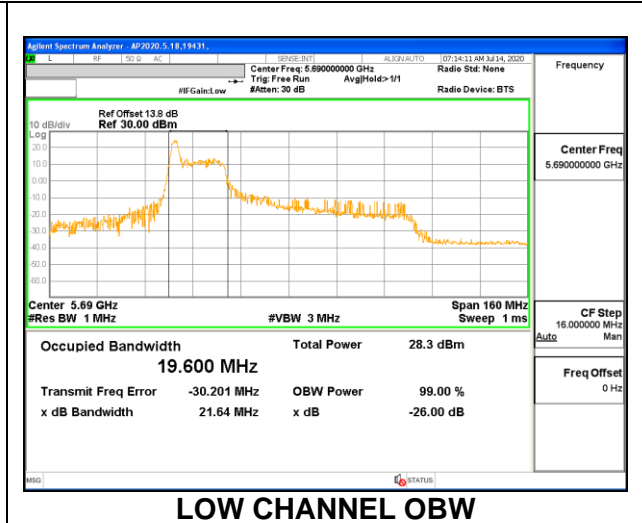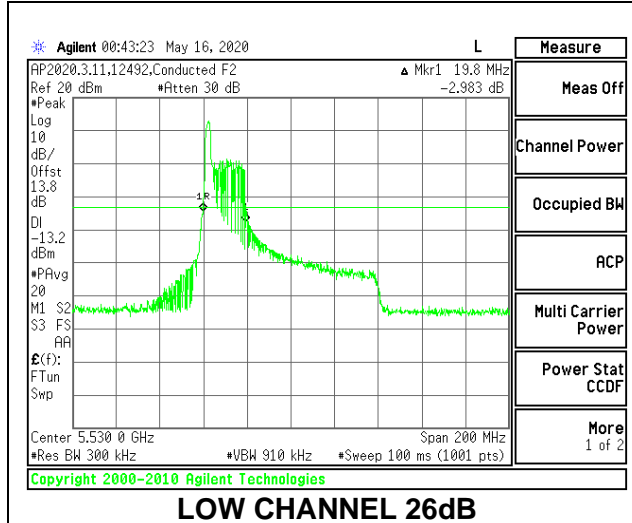



1TX Antenna 5 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	40.60	36.7324
High	5610	39.80	38.4459
138	5690	40.40	37.3396

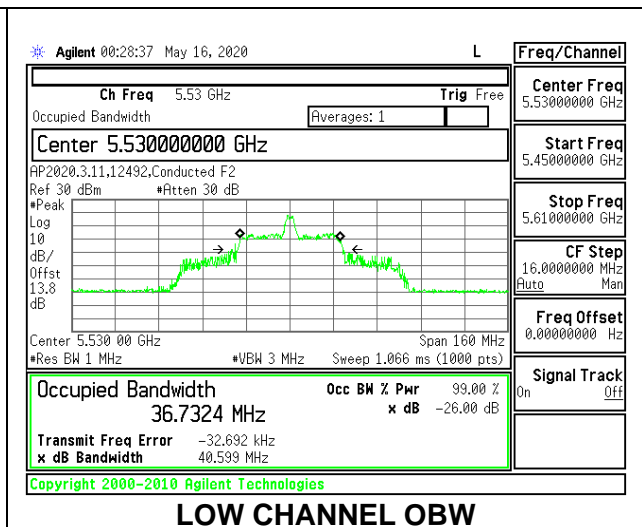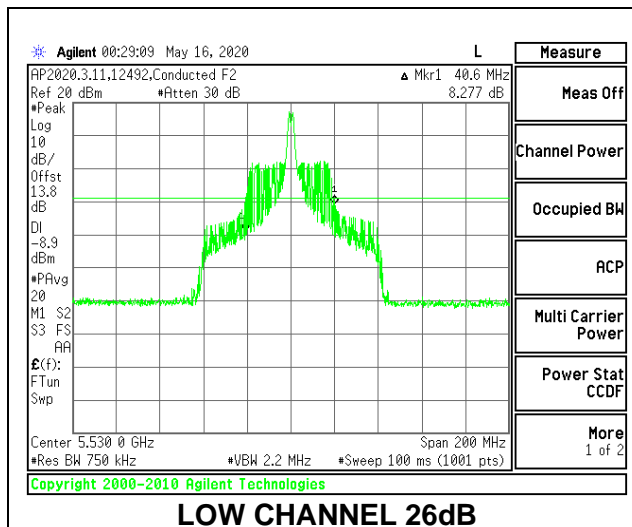



1TX Antenna 5 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	21.00	19.0646
High	5610	21.20	21.5289
138	5690	21.20	20.8250

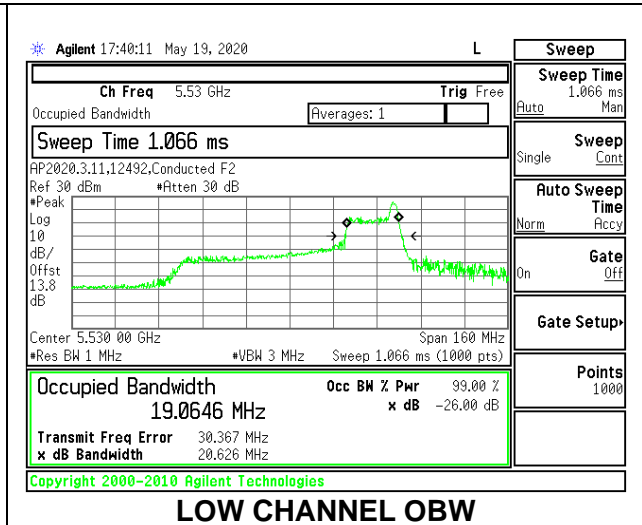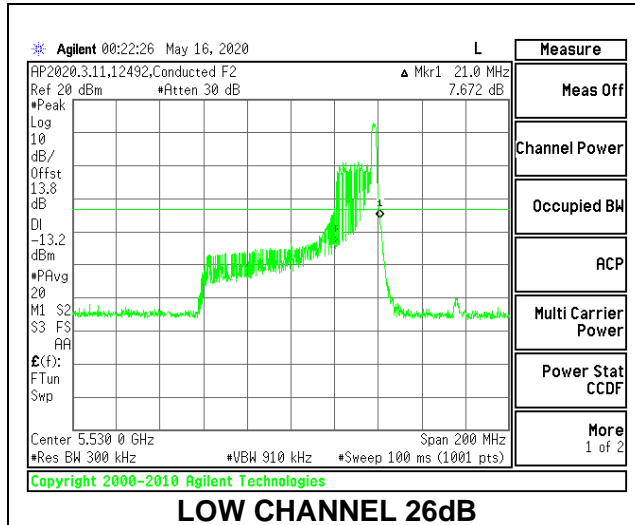

1TX Antenna 5 MODE: 996 Tones, RU Index 67



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	82.80	76.6531
High	5610	83.60	76.7117
138	5690	83.00	76.3092

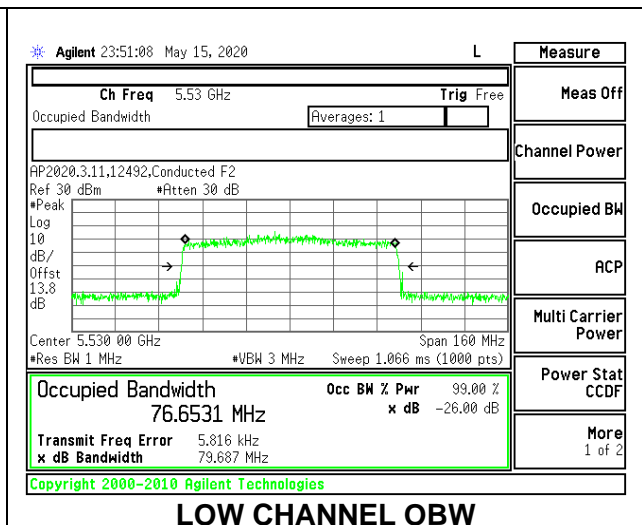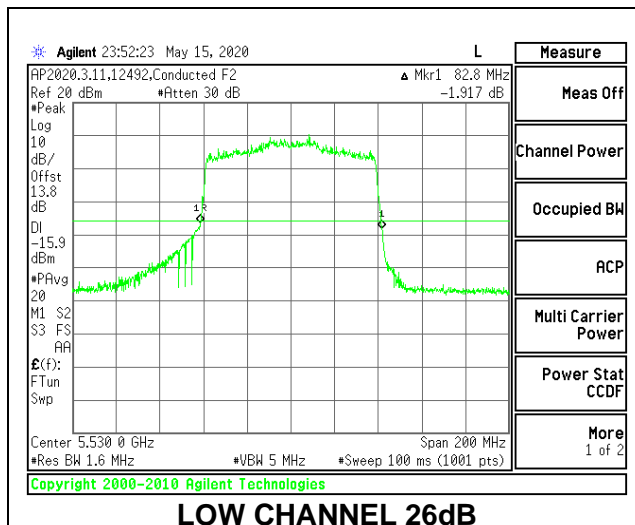



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	20.20	20.20	19.2513	19.1535
High	5610	20.00	20.20	19.2310	19.0741
138	5690	20.20	20.00	19.6797	18.8971

LOW CHANNEL 26dB

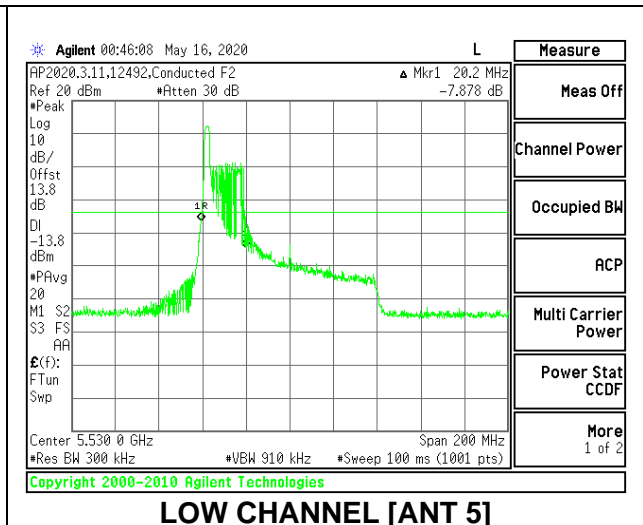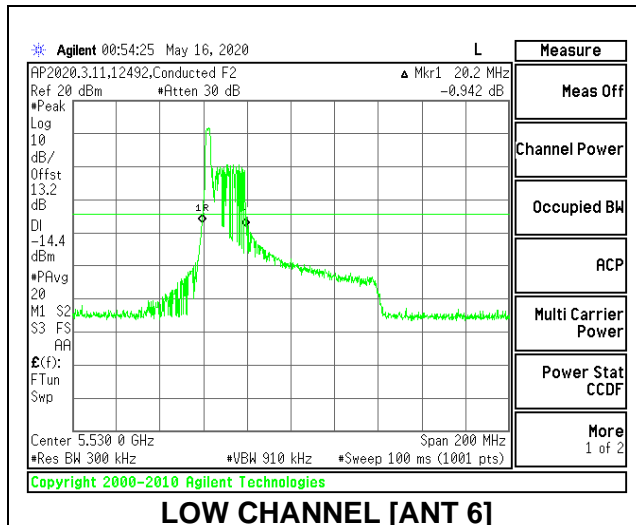



LOW CHANNEL OBW

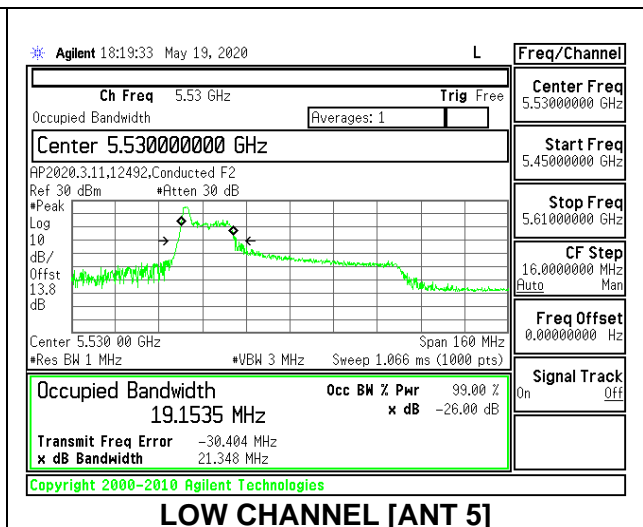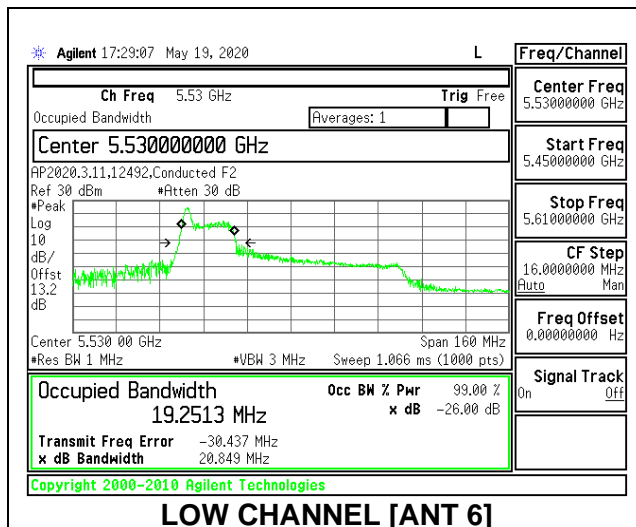



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	39.40	38.40	37.0614	36.9799
High	5610	40.60	38.20	37.9885	36.6973
138	5690	40.40	38.40	36.9459	36.4763

LOW CHANNEL 26dB

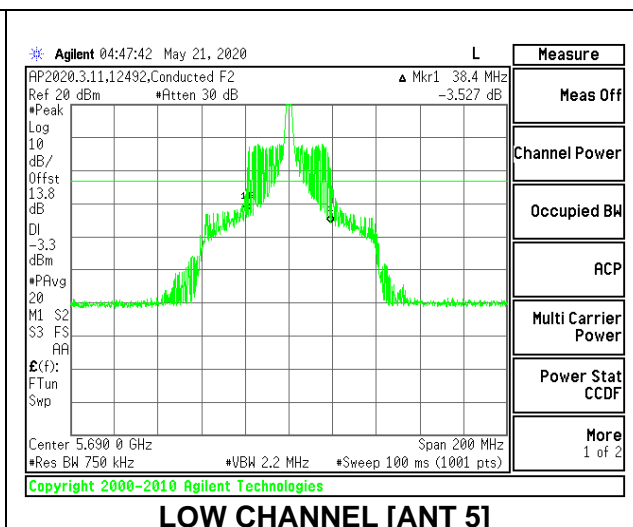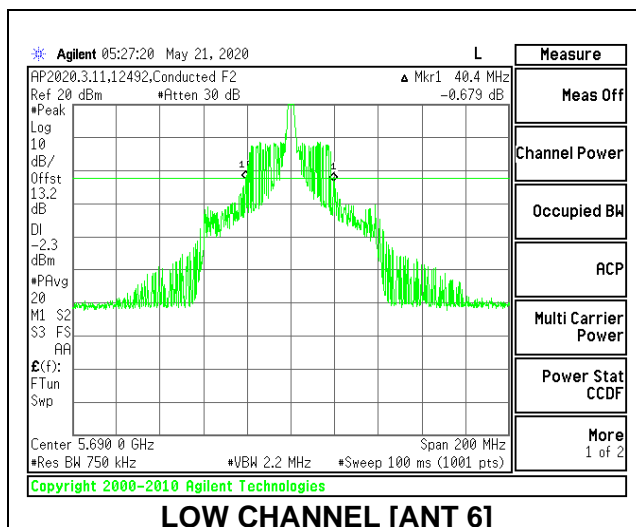



LOW CHANNEL OBW

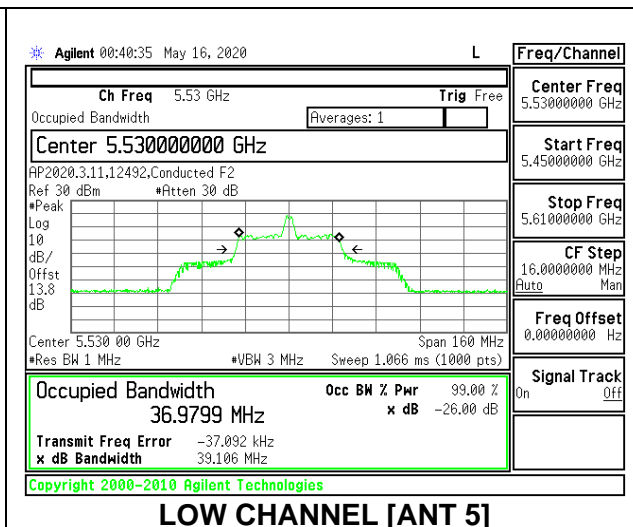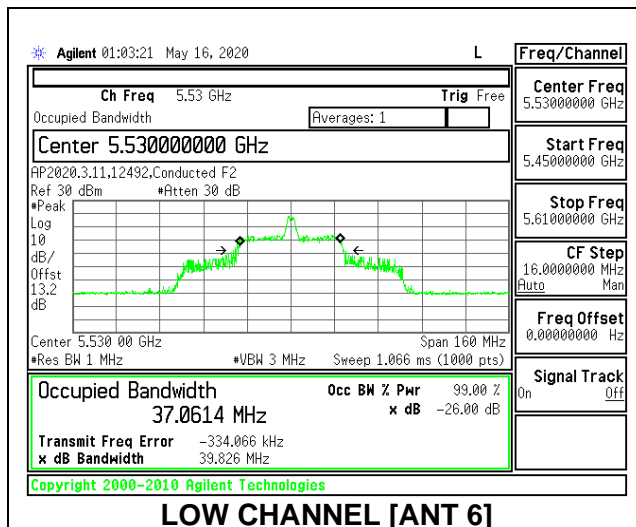



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	21.00	20.20	20.9911	19.2808
High	5610	20.60	20.20	20.5880	19.0839
138	5690	20.00	20.20	19.9650	19.2888

LOW CHANNEL 26dB

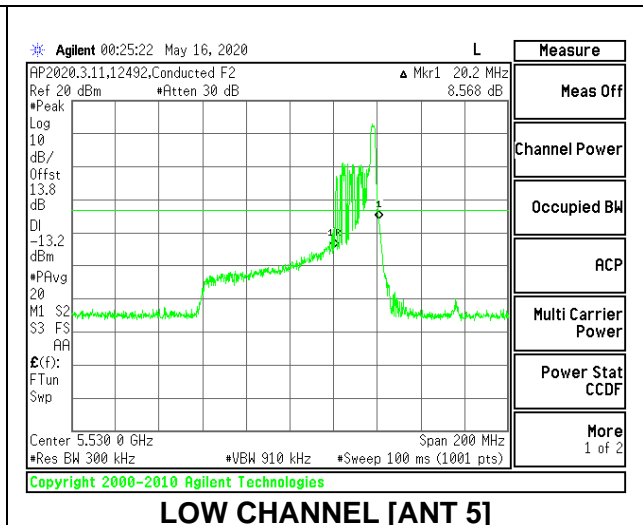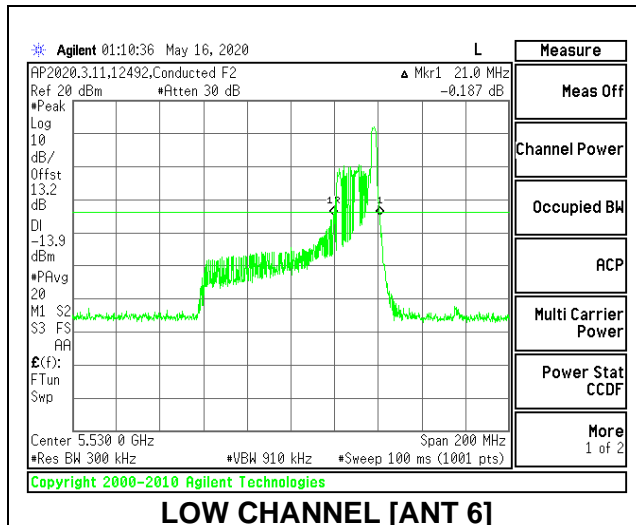



LOW CHANNEL OBW

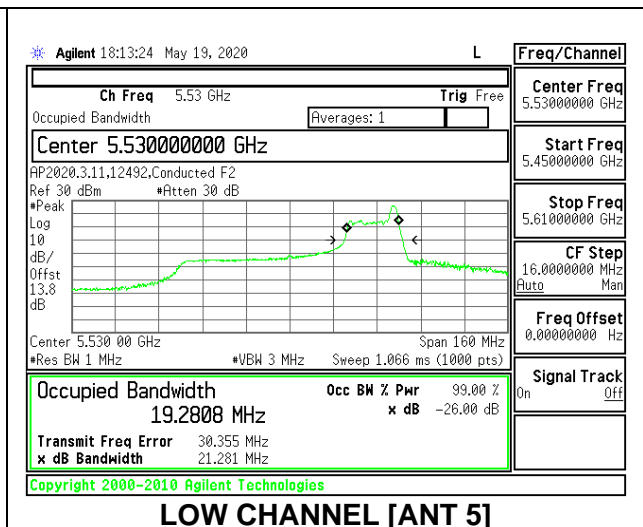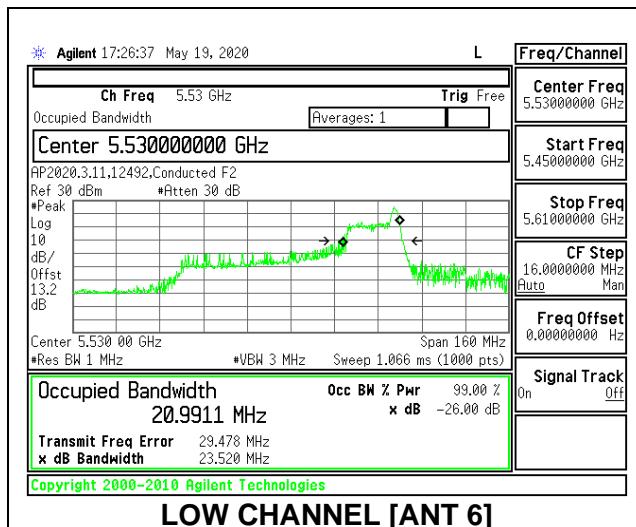



2TX Antenna 6 + Antenna 5 CDD MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	83.20	82.60	76.2065	76.4333
High	5610	83.00	83.00	76.6123	76.4081
138	5690	83.40	83.00	76.7970	76.5267

LOW CHANNEL 26dB

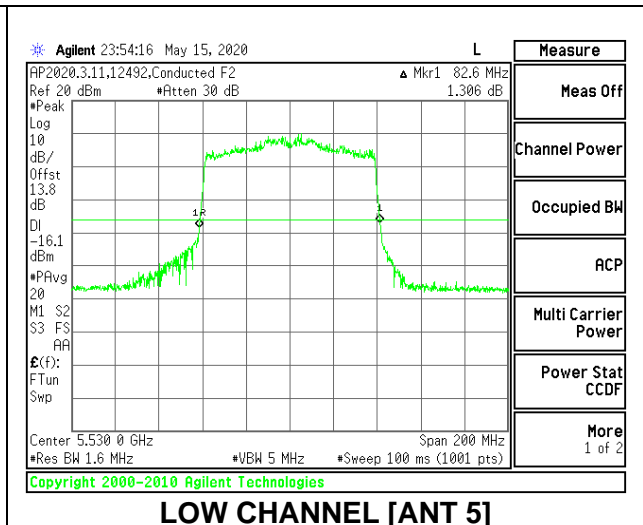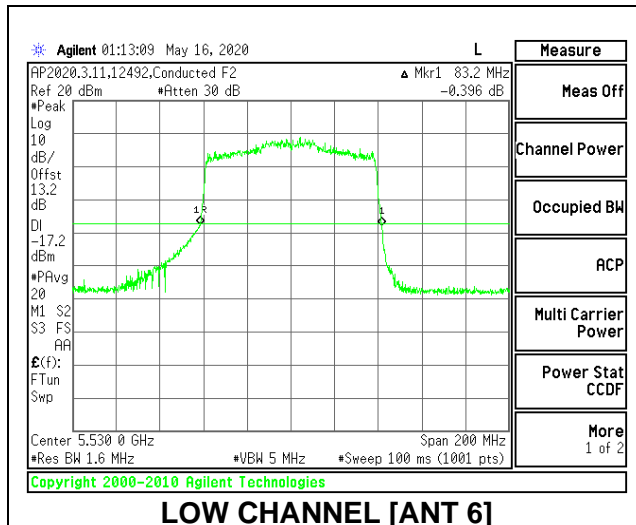



LOW CHANNEL OBW

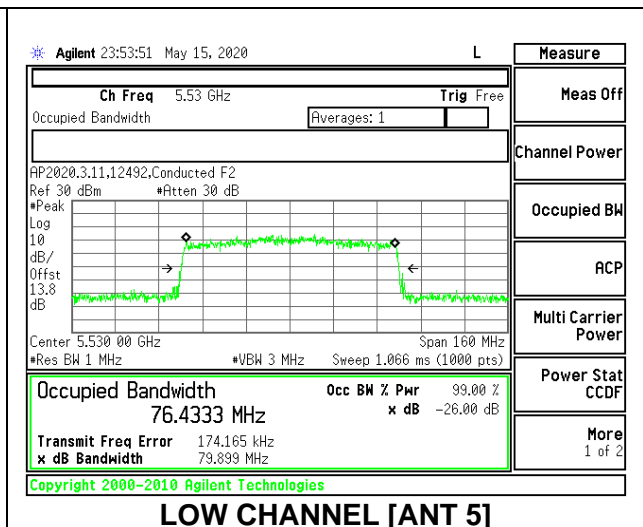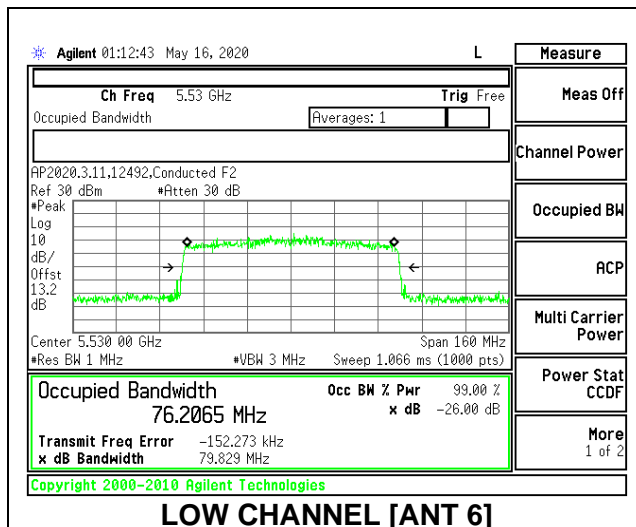

8.2.19. 802.11n HT20 MODE IN THE 5.8 GHz BAND



1TX Antenna 6 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.45	17.7311
Mid	5785	21.55	17.6860
High	5825	21.55	17.7302

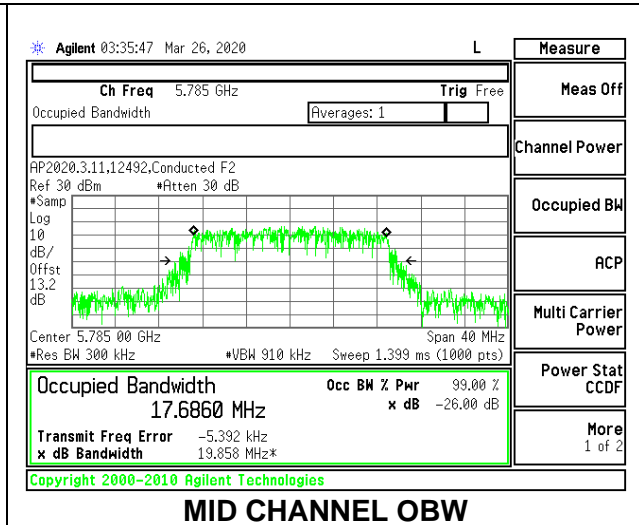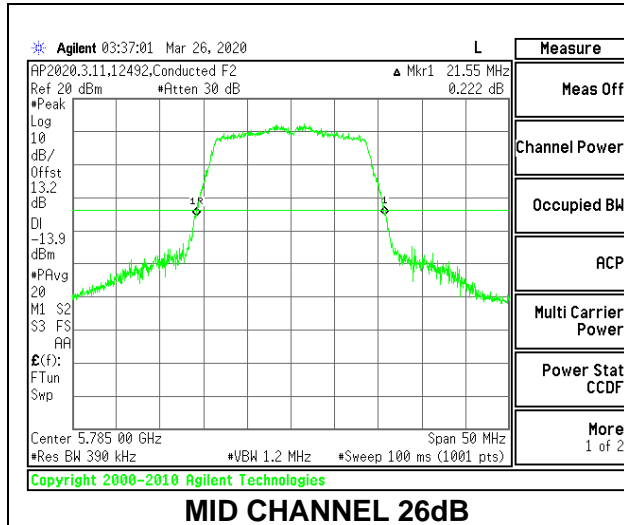

1TX Antenna 5 MODE



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.55	17.5473
Mid	5785	21.70	17.7108
High	5825	21.85	17.6048

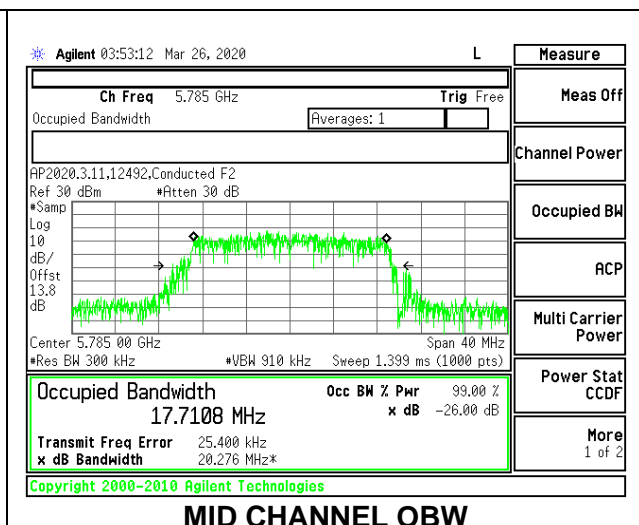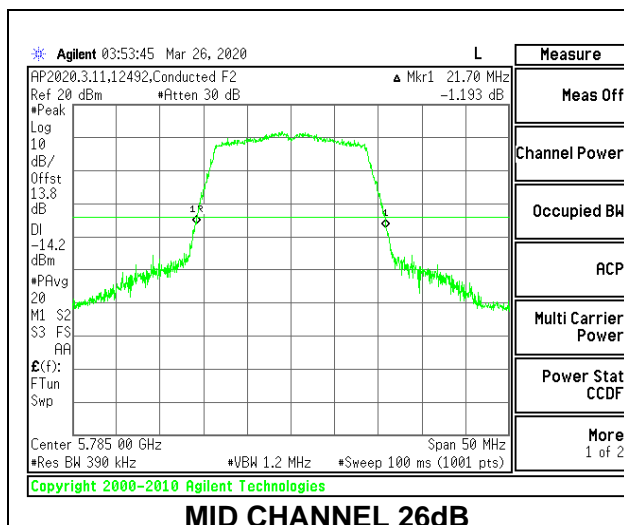



2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	21.65	21.20	17.7535	17.6556
Mid	5785	21.65	21.15	17.6201	17.6731
High	5825	21.60	21.15	17.5553	17.7202

MID CHANNEL 26dB

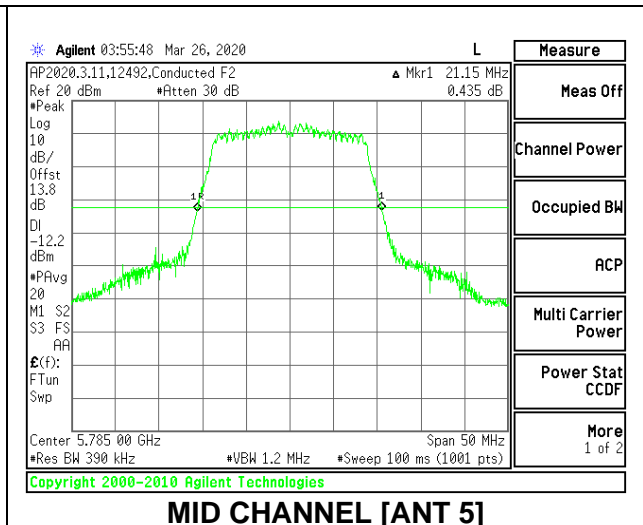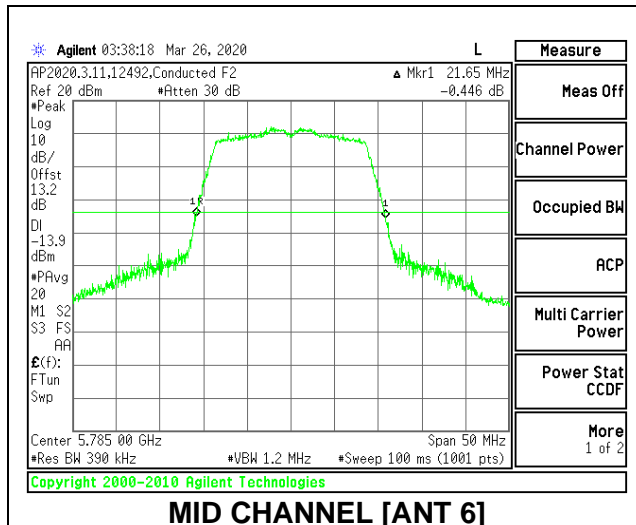



MID CHANNEL OBW

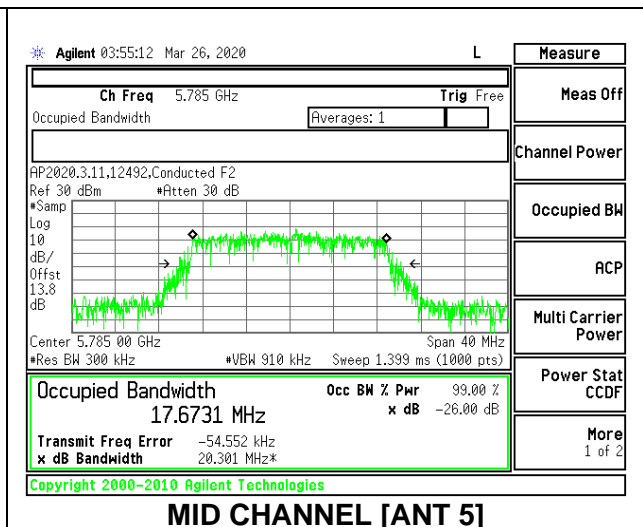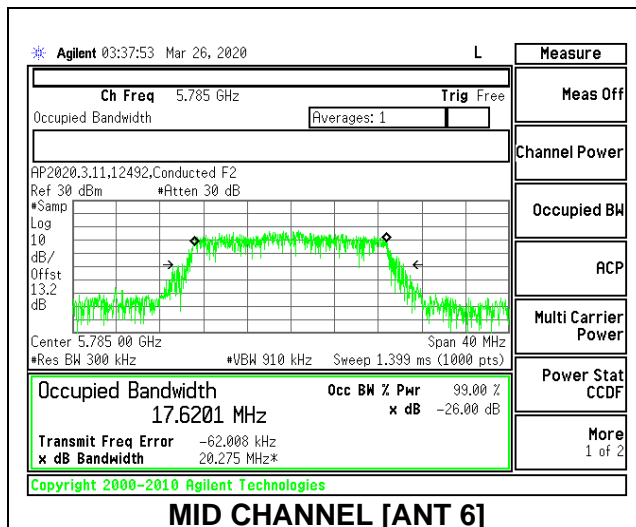

8.2.20. 802.11n HT40 MODE IN THE 5.8 GHz BAND



1TX Antenna 6 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	42.30	36.1727
High	5795	42.50	36.0727

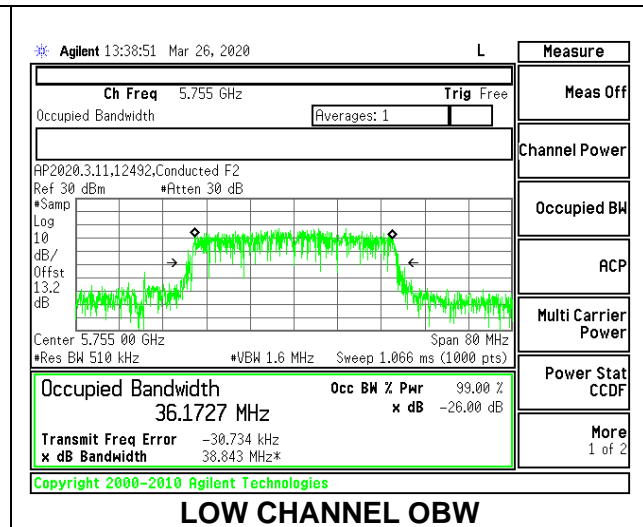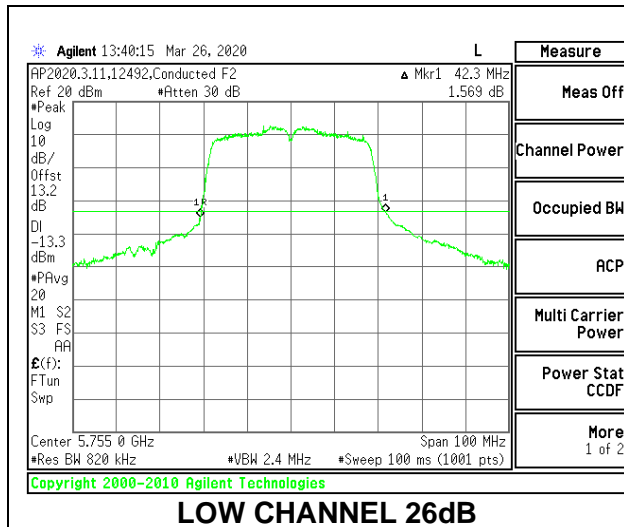

1TX Antenna 5 MODE



Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	42.10	36.1091
High	5795	42.40	36.1476

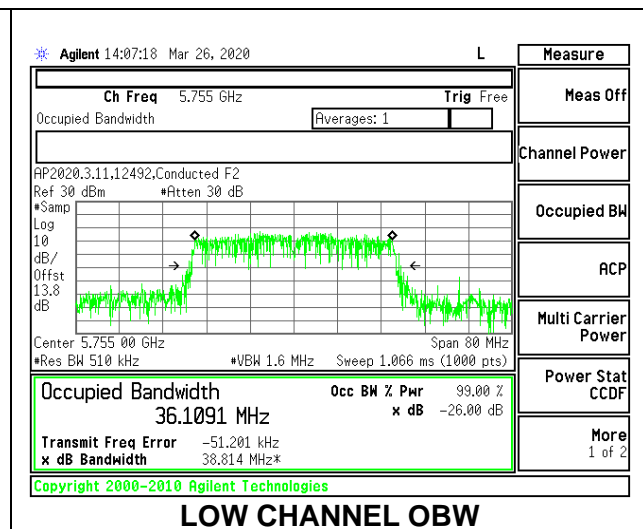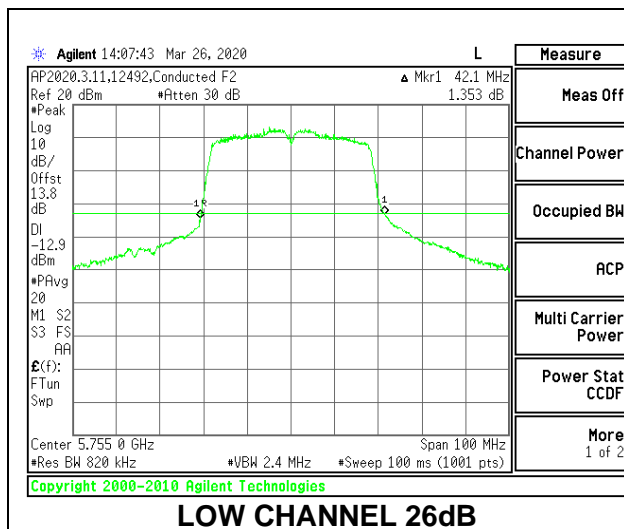



2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	42.50	40.80	36.1324	36.1086
High	5795	42.40	40.80	36.1921	36.1502

LOW CHANNEL 26dB

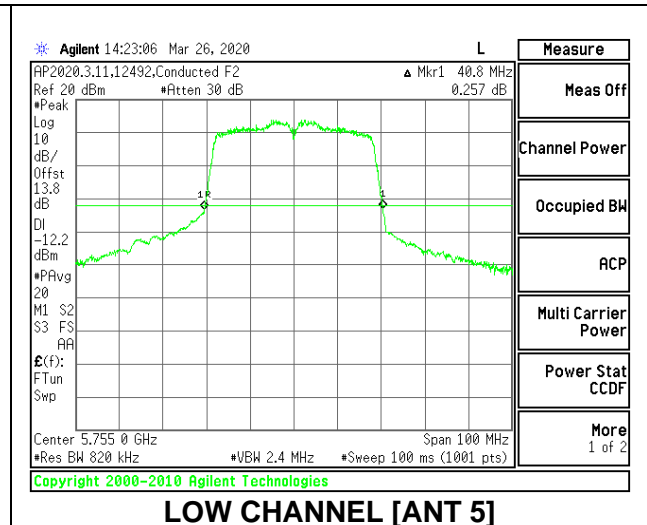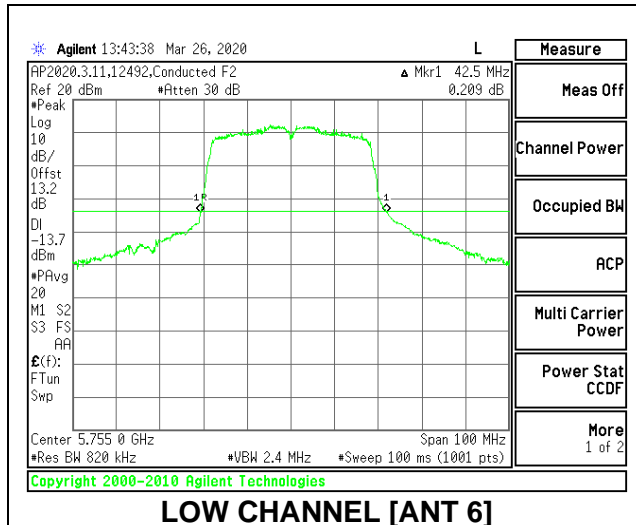



LOW CHANNEL OBW

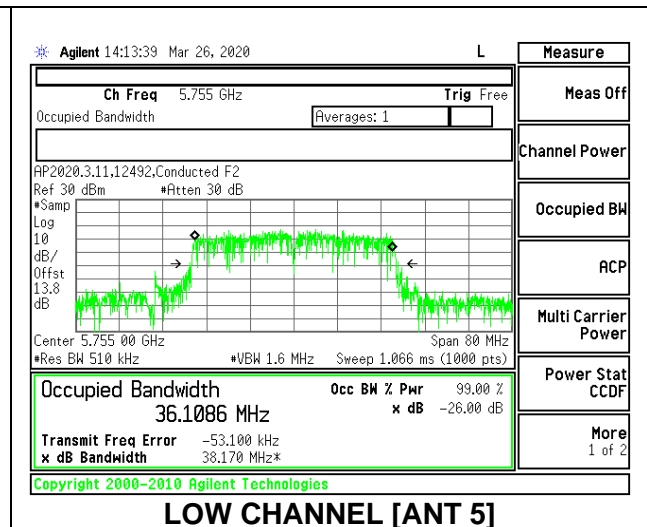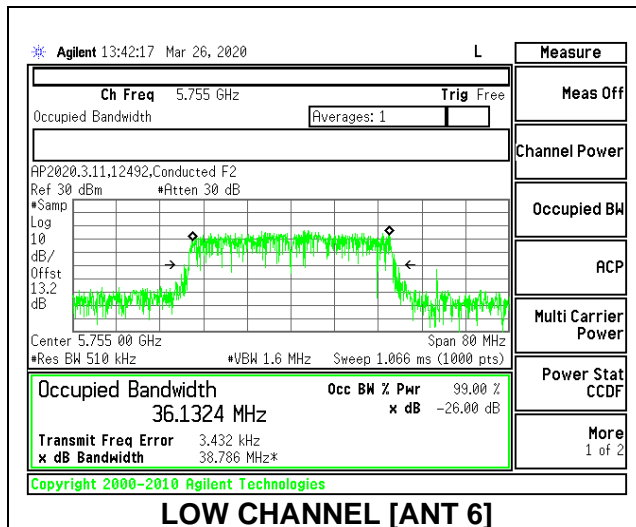

8.2.21. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND



1TX Antenna 6 MODE

Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	84.00	75.5337

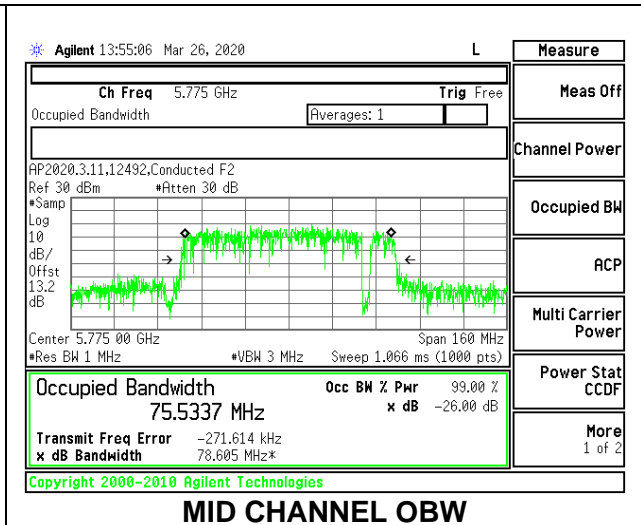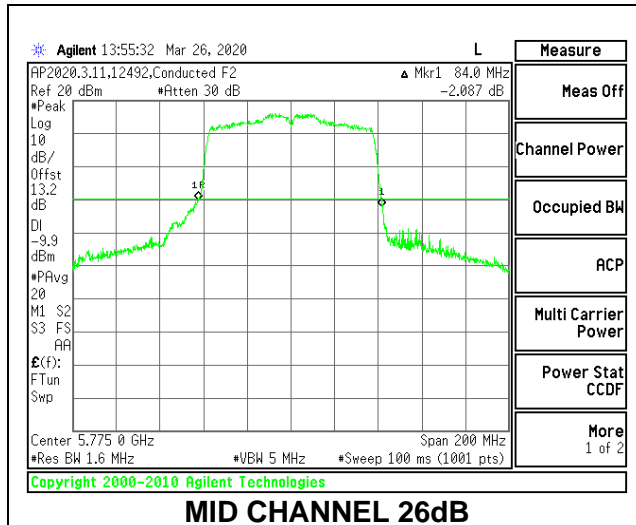

1TX Antenna 5 MODE



Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	85.00	75.5017

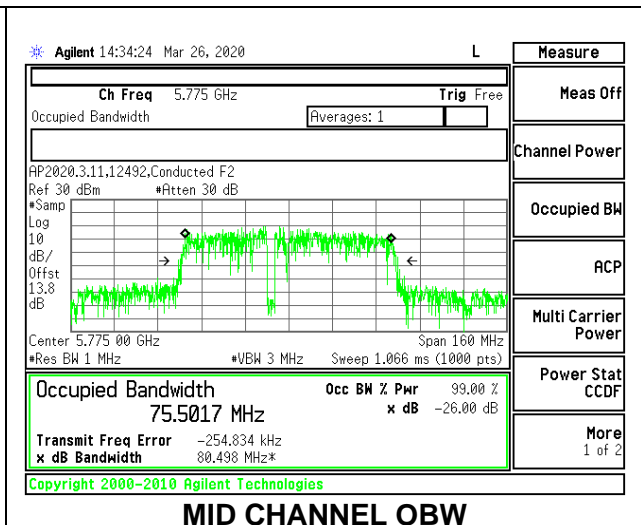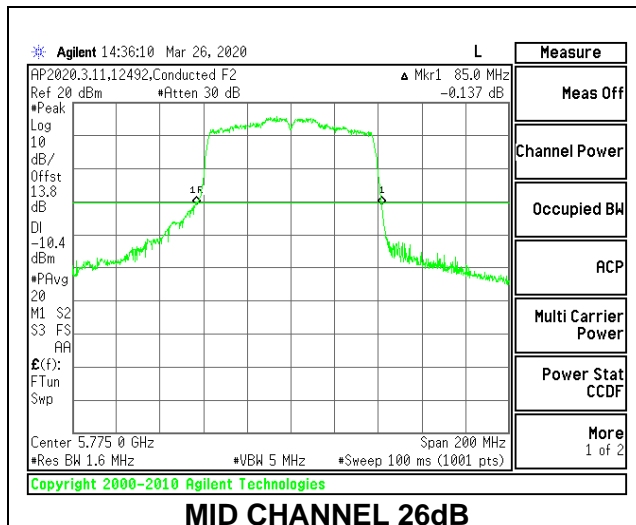



2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	85.00	83.20	75.7789	75.6910

MID CHANNEL 26dB

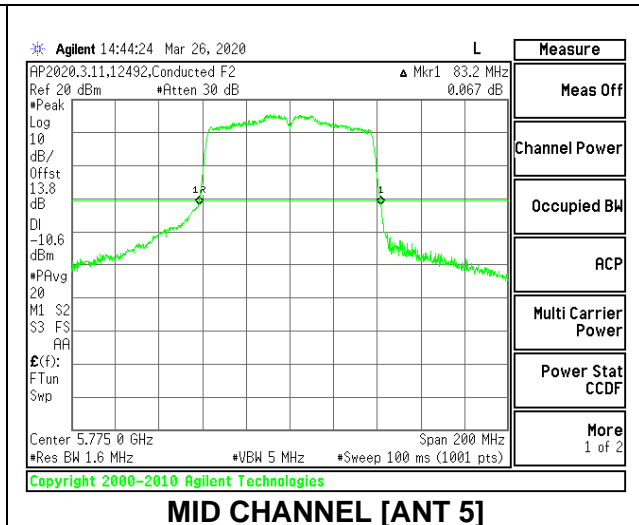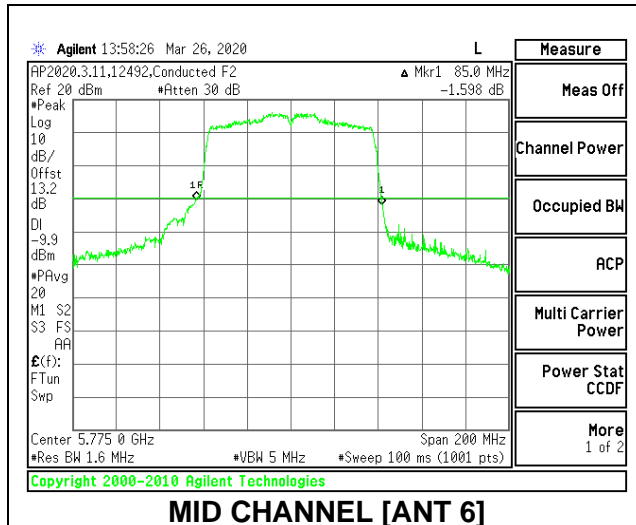



MID CHANNEL OBW

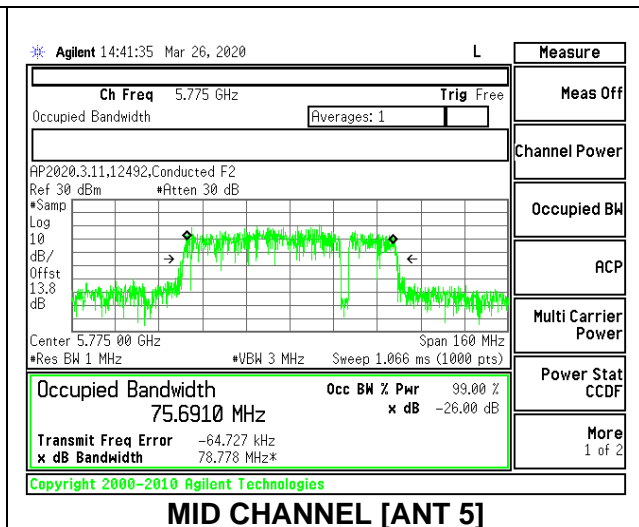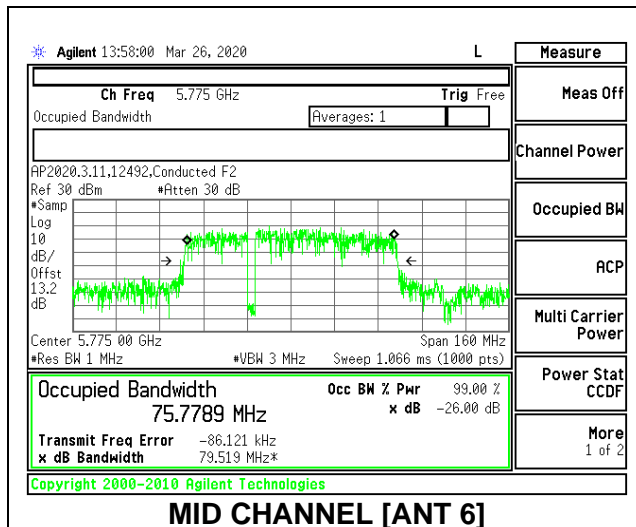

8.2.22. 802.11ax HE20 MODE IN THE 5.8 GHz BAND



1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.20	18.3678
Mid	5785	20.20	18.3766
High	5825	20.15	18.3763

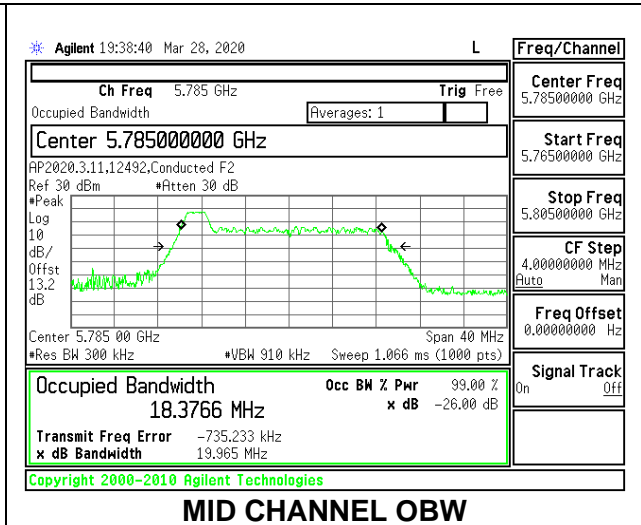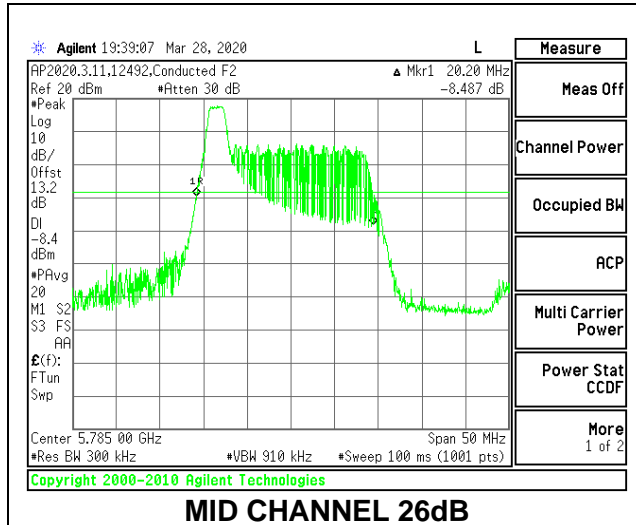


1TX Antenna 6 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.40	17.3271
Mid	5785	19.45	17.2280
High	5825	19.35	17.1993

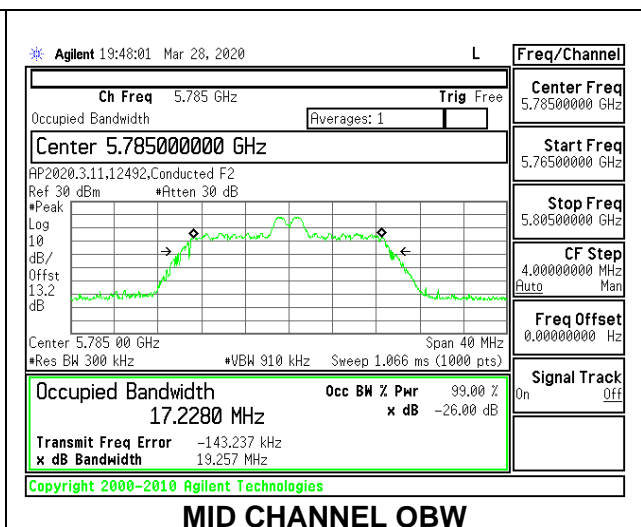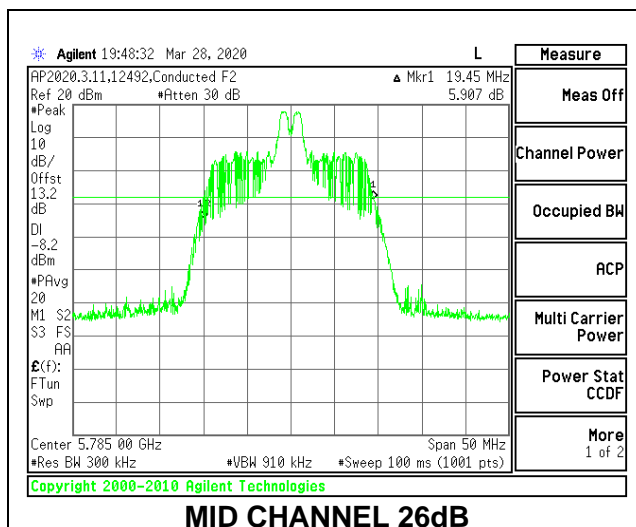


1TX Antenna 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.75	18.6051
Mid	5785	20.75	18.7066
High	5825	20.70	18.5936

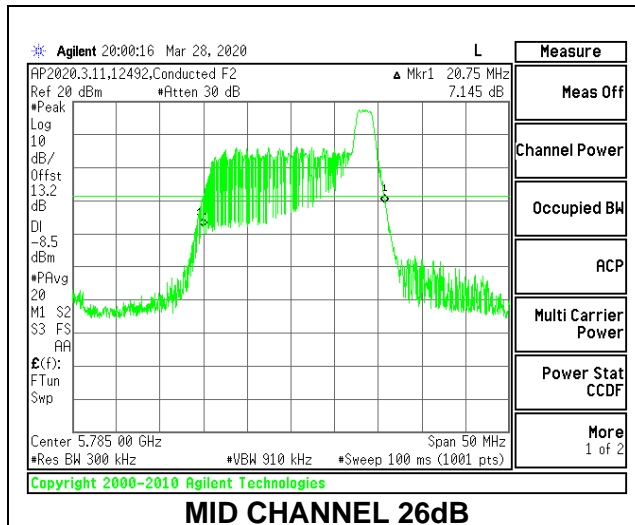


MID CHANNEL 26dB

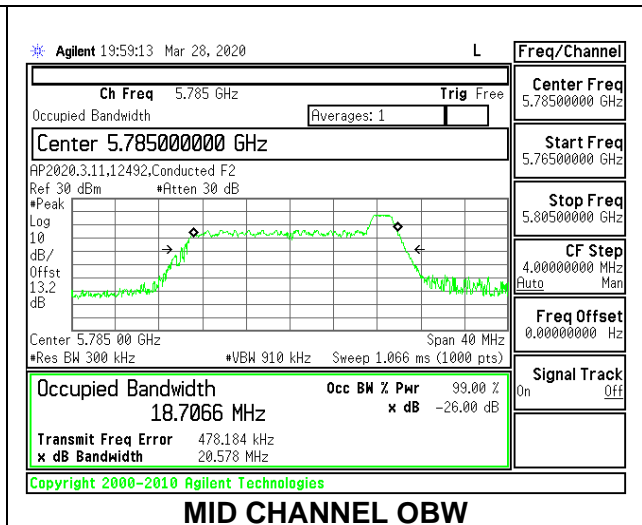


MID CHANNEL OBW

1TX Antenna 6 MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.65	18.8147
Mid	5785	21.55	18.8825
High	5825	21.40	18.8083

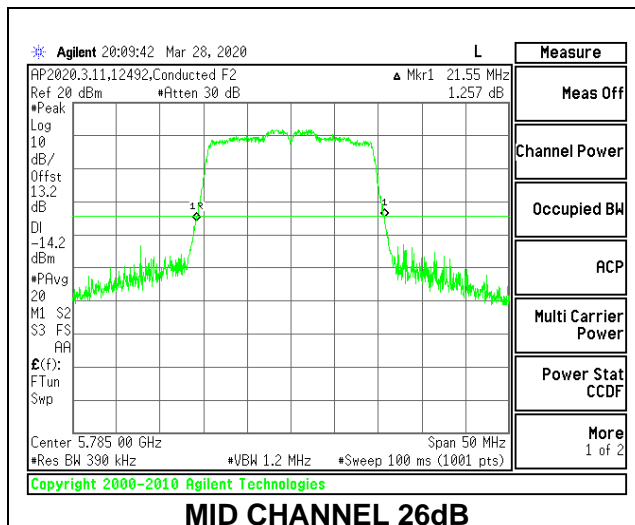



MID CHANNEL 26dB

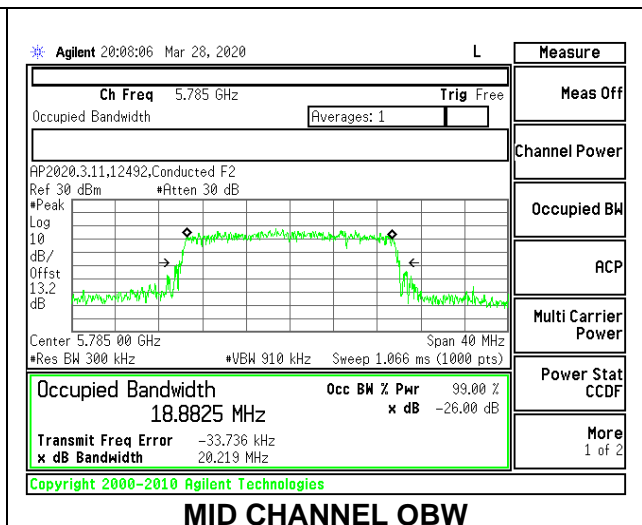

MID CHANNEL OBW



1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.15	18.3897
Mid	5785	20.15	18.3650
High	5825	20.20	18.4490

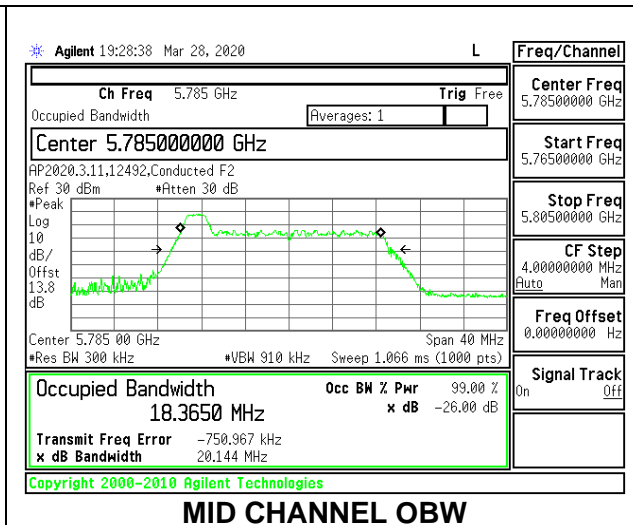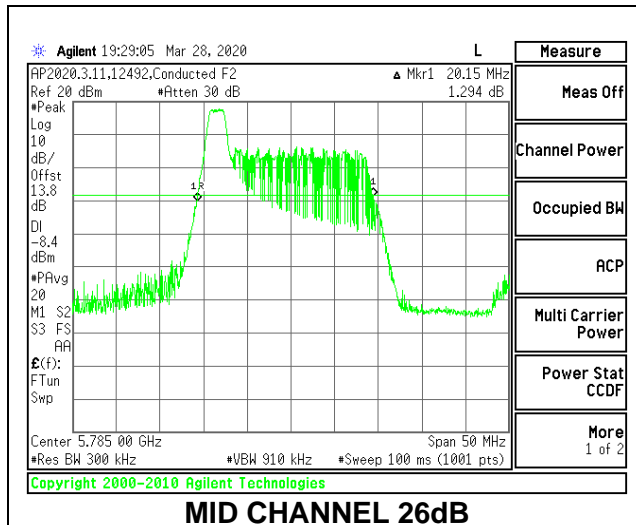



1TX Antenna 5 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.45	17.1806
Mid	5785	19.40	17.3658
High	5825	19.40	17.1562

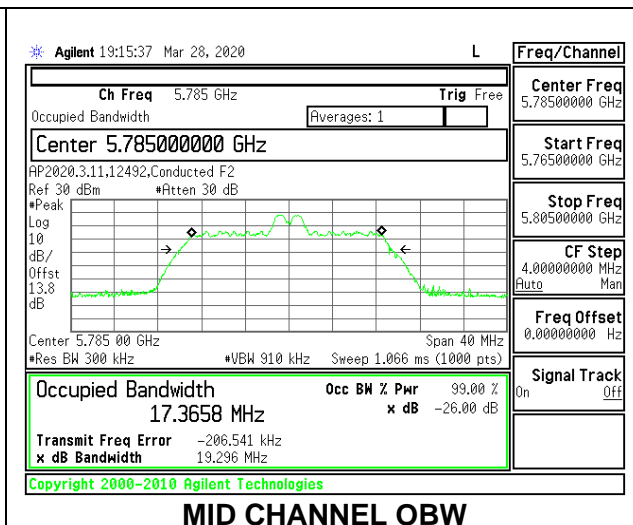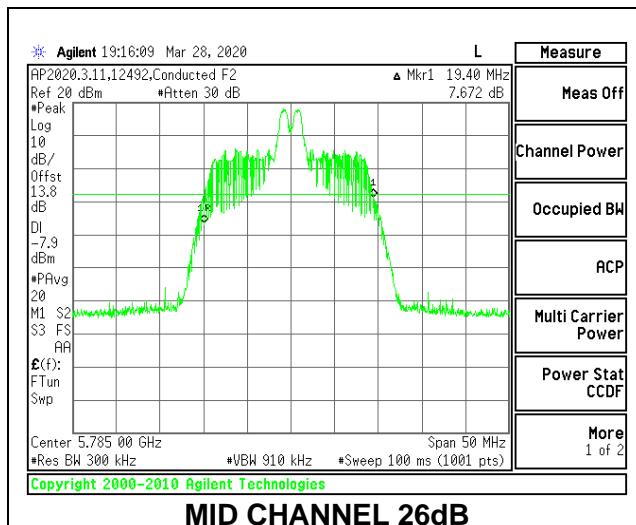



1TX Antenna 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.75	18.6515
Mid	5785	20.85	18.6235
High	5825	20.55	18.7028

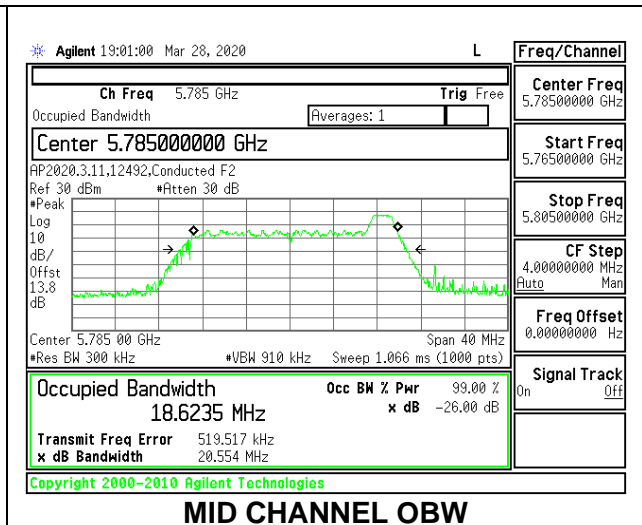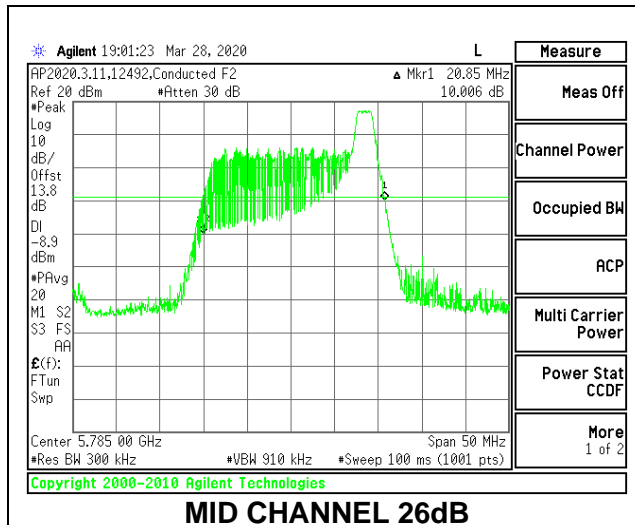

1TX Antenna 5 MODE: 242 Tones, RU Index 61



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.40	18.8703
Mid	5785	21.45	18.9065
High	5825	21.55	18.8425

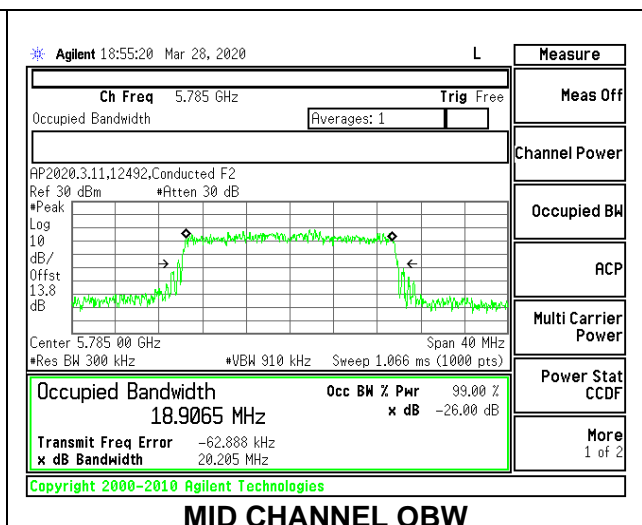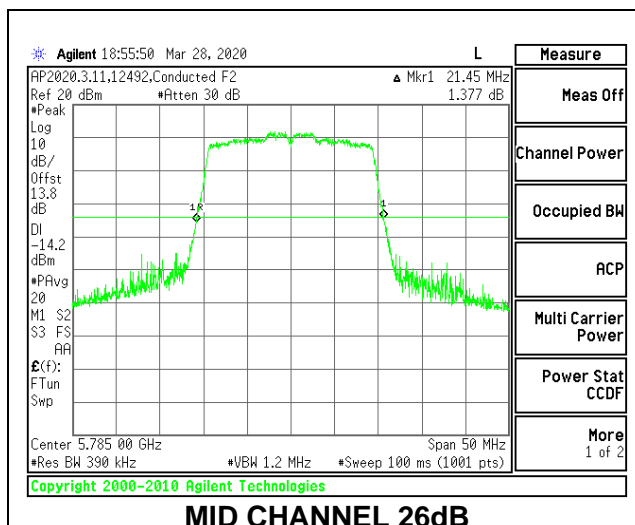



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	20.10	19.85	18.3427	18.2741
Mid	5785	20.15	19.60	18.4063	18.3059
High	5825	20.15	19.80	18.3989	18.3319

MID CHANNEL 26dB

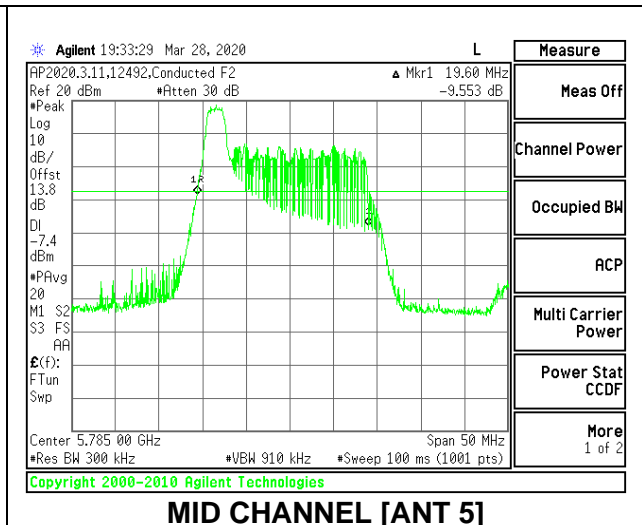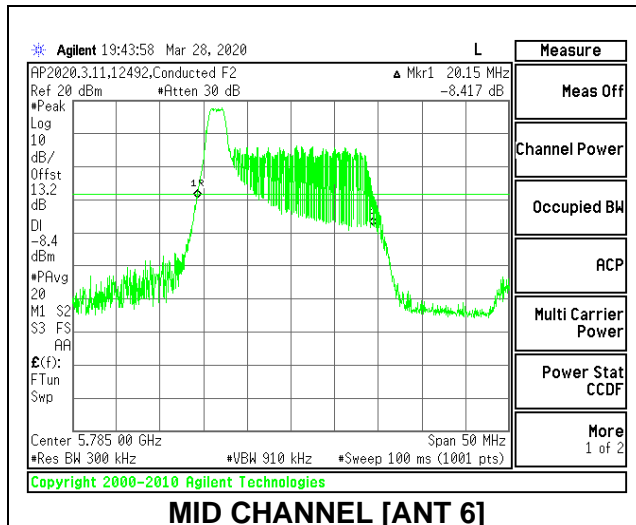



MID CHANNEL OBW

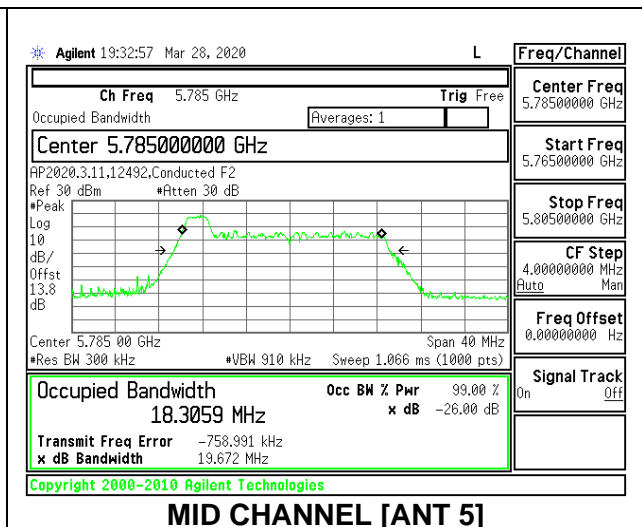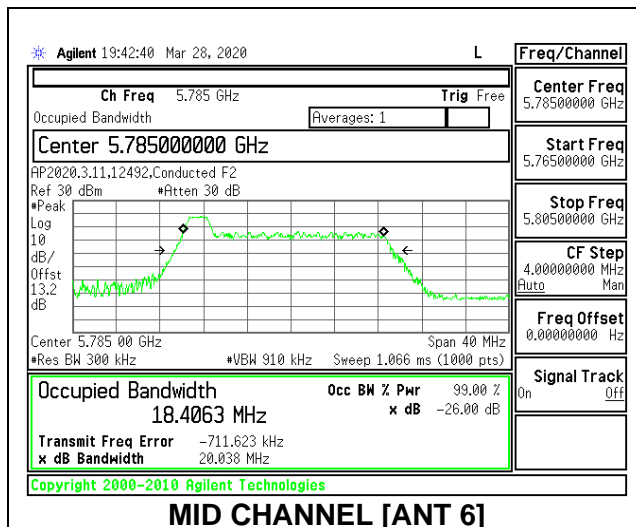



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	19.45	18.25	17.3286	16.9272
Mid	5785	19.40	18.20	17.2753	16.9645
High	5825	19.45	18.40	17.2355	16.9300

MID CHANNEL 26dB

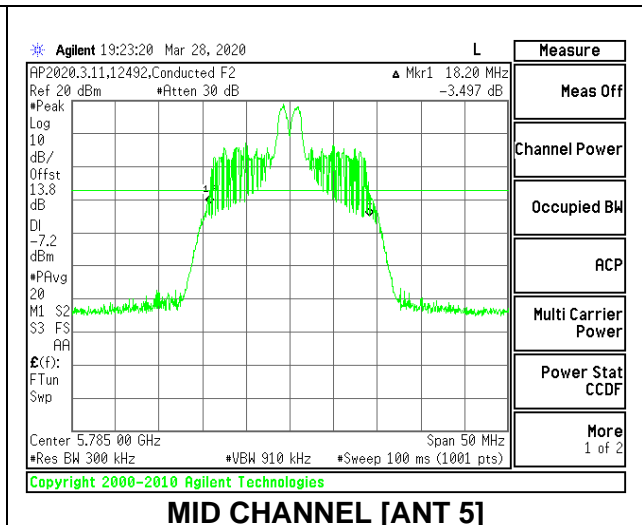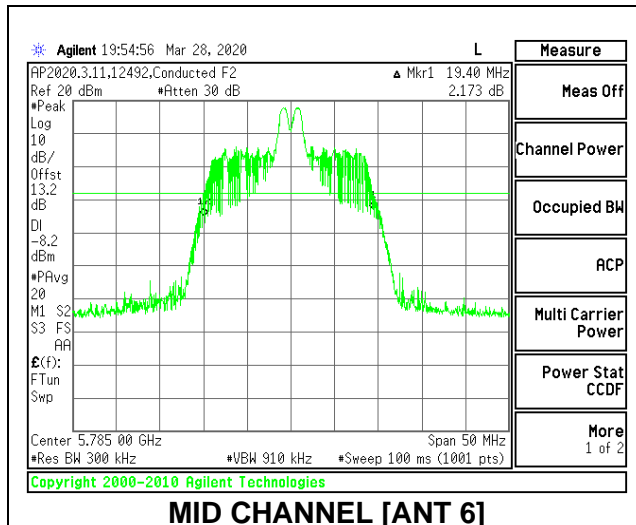



MID CHANNEL OBW

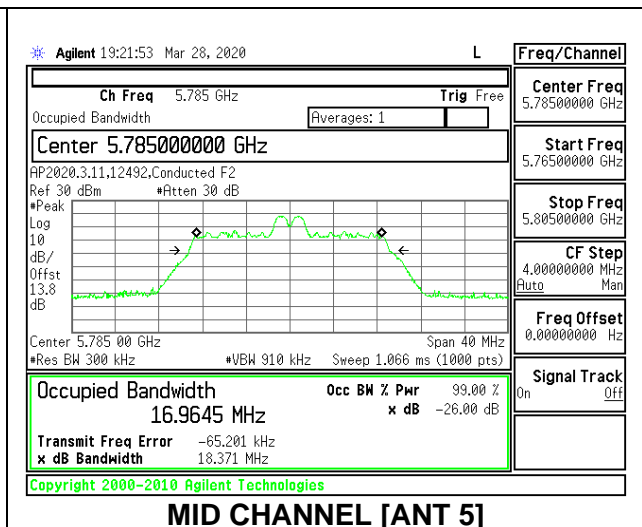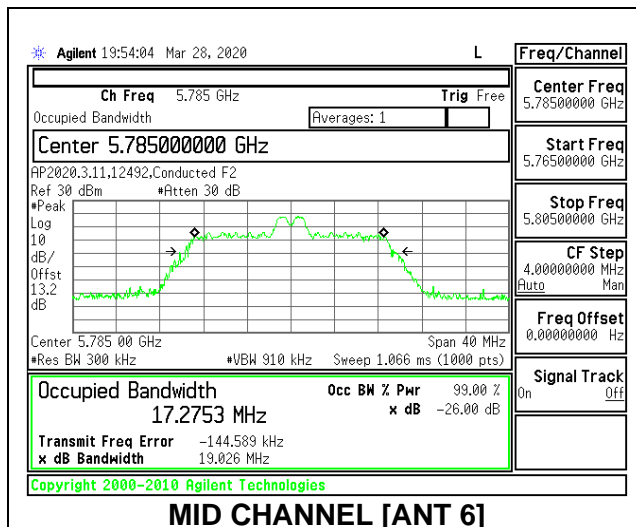



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	20.65	19.85	18.5417	18.4372
Mid	5785	20.75	19.90	18.5331	18.4221
High	5825	20.85	20.00	18.6432	18.3477

MID CHANNEL 26dB

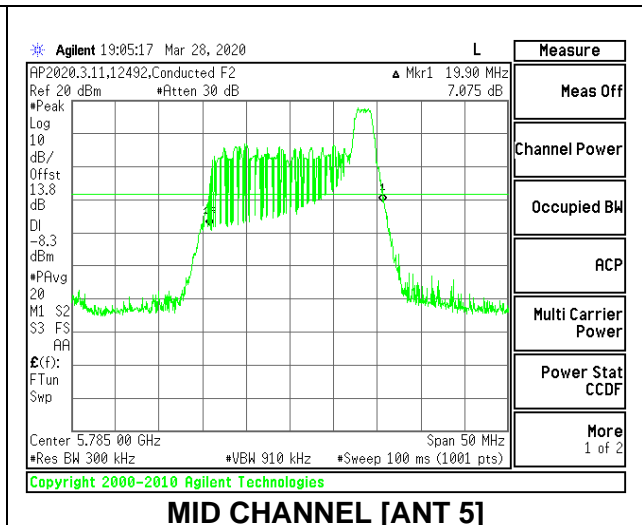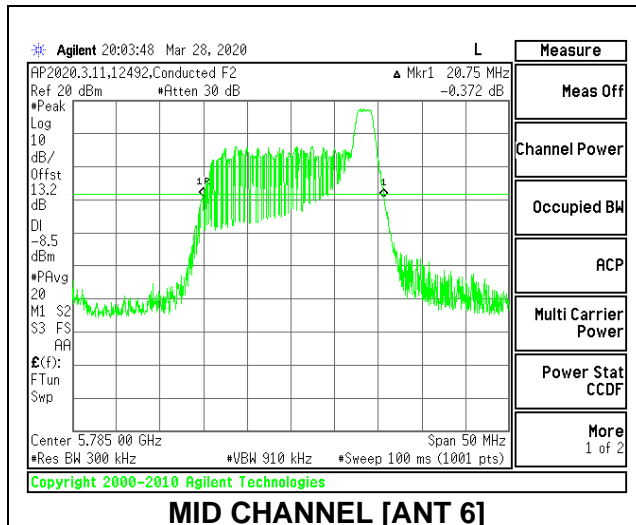



MID CHANNEL OBW

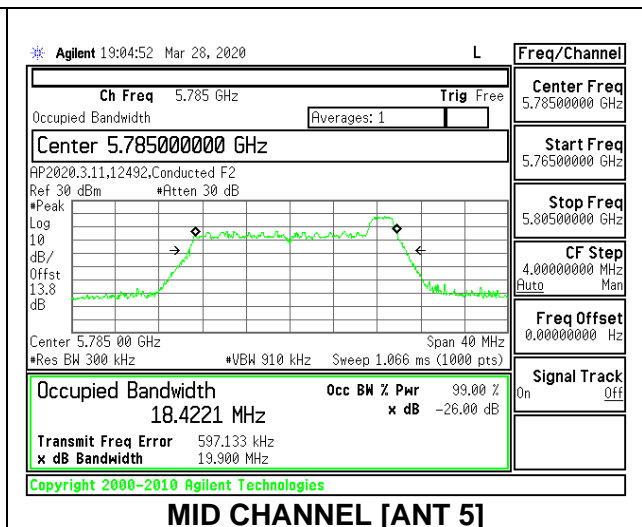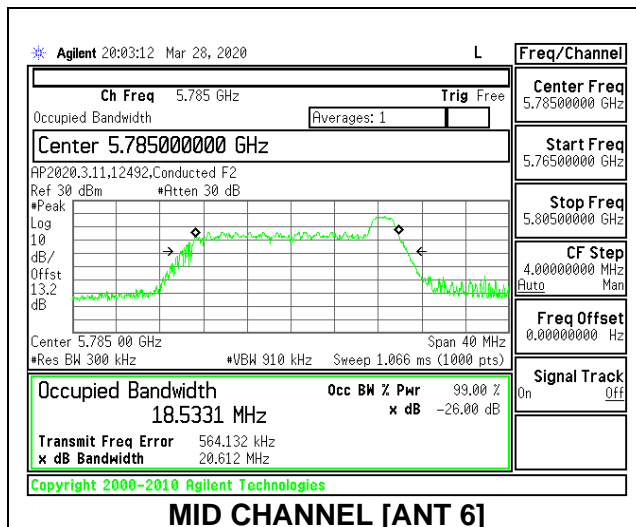



2TX Antenna 6 + Antenna 5 CDD MODE: 242 Tones, RU Index 61

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	21.45	21.35	18.7947	18.7403
Mid	5785	21.45	21.45	18.9239	18.8209
High	5825	21.55	21.30	18.8531	18.8640

MID CHANNEL 26dB

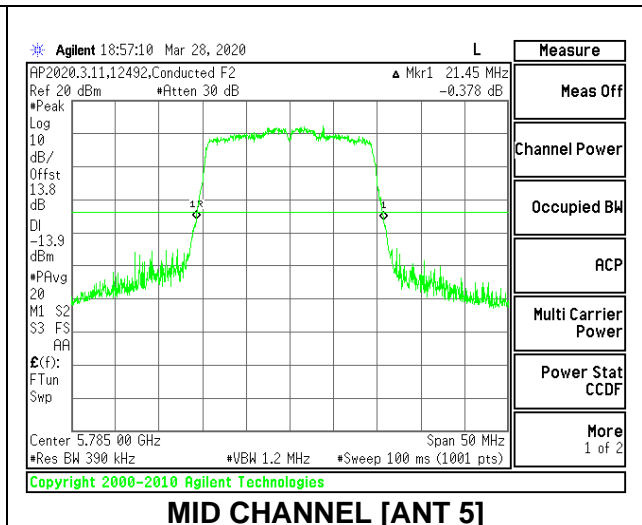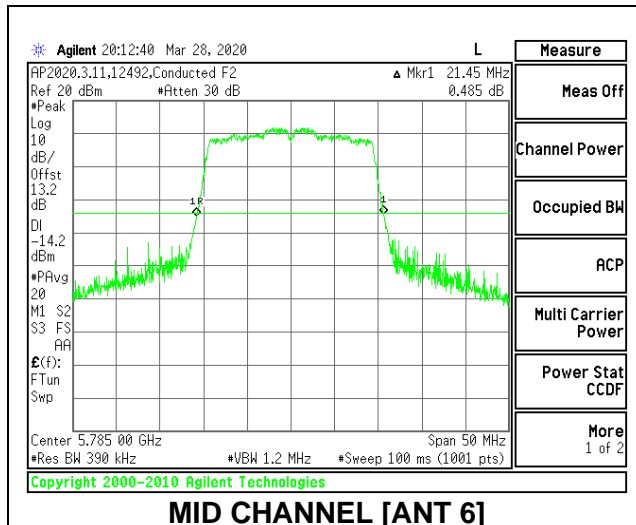



MID CHANNEL OBW

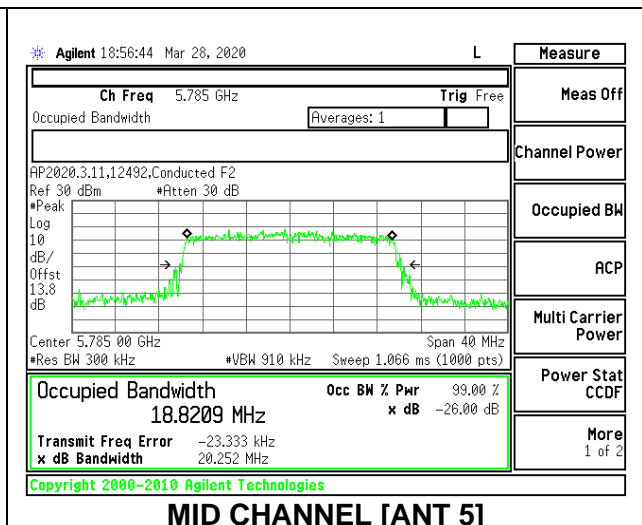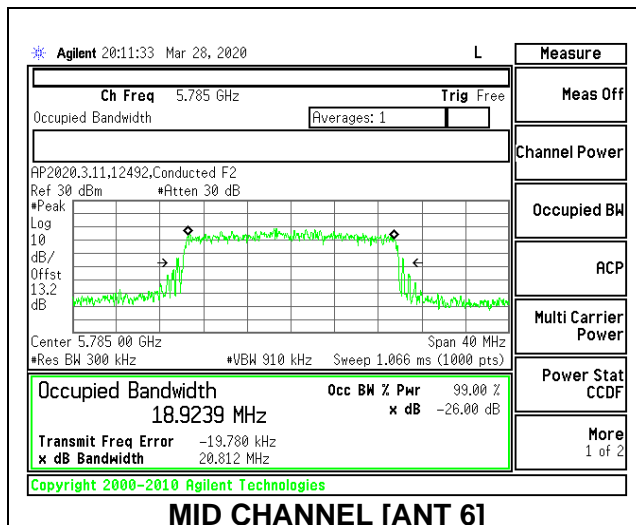

8.2.23. 802.11ax HE40 MODE IN THE 5.8 GHz BAND



1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.40	18.4152
High	5795	20.20	18.5878

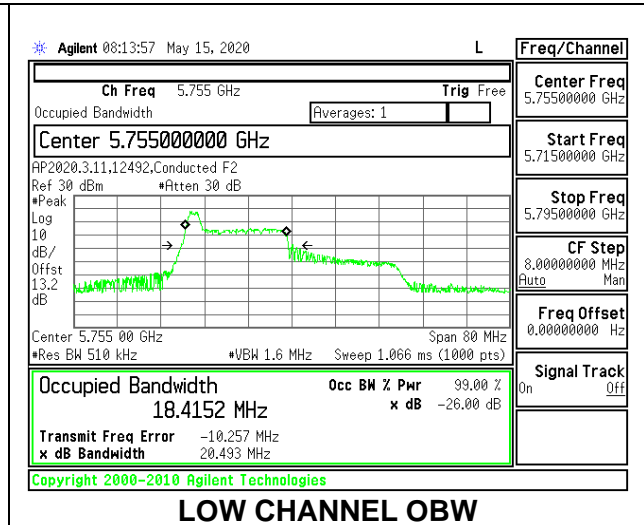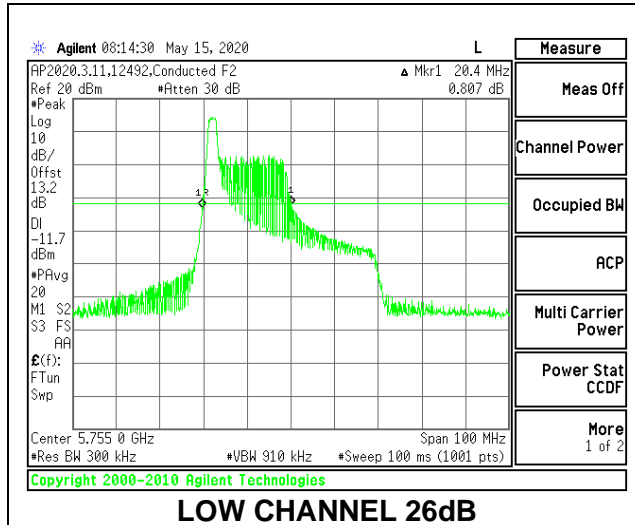



1TX Antenna 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	23.50	21.9928
High	5795	23.60	21.8146

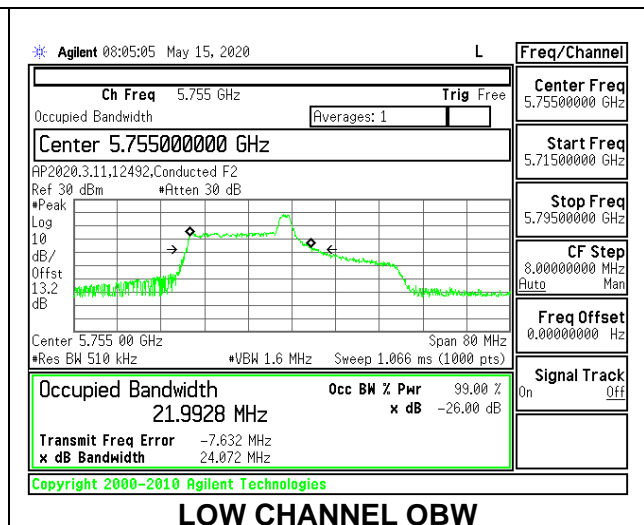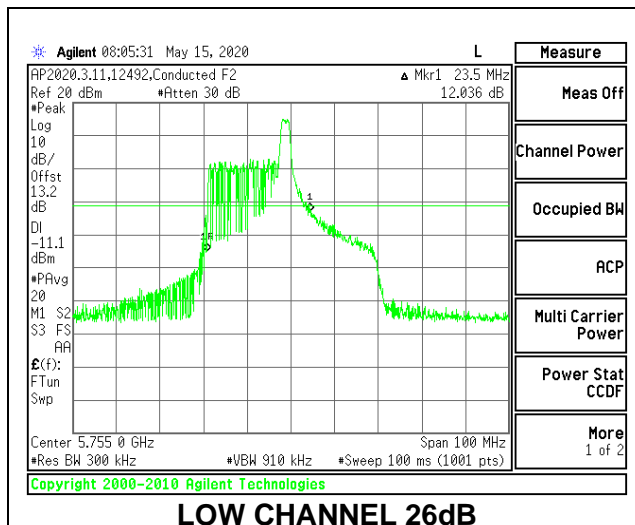



1TX Antenna 6 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.30	19.0347
High	5795	20.40	18.9349

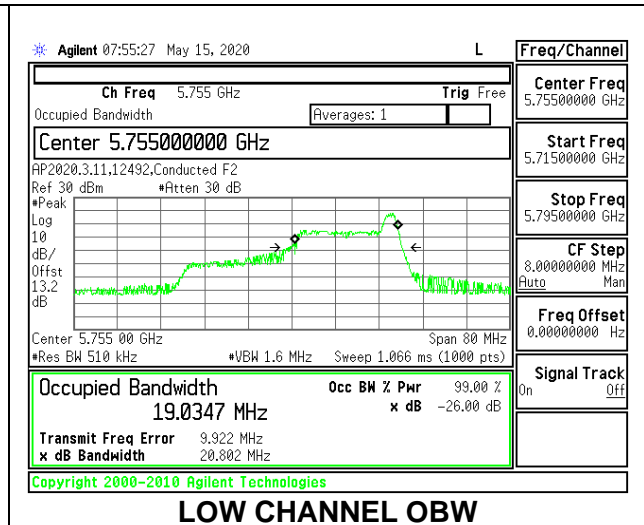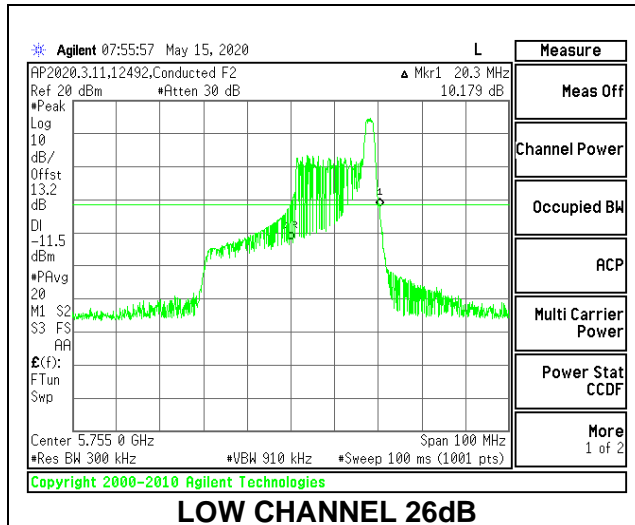



1TX Antenna 6 MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.20	37.6003
High	5795	41.10	37.4231

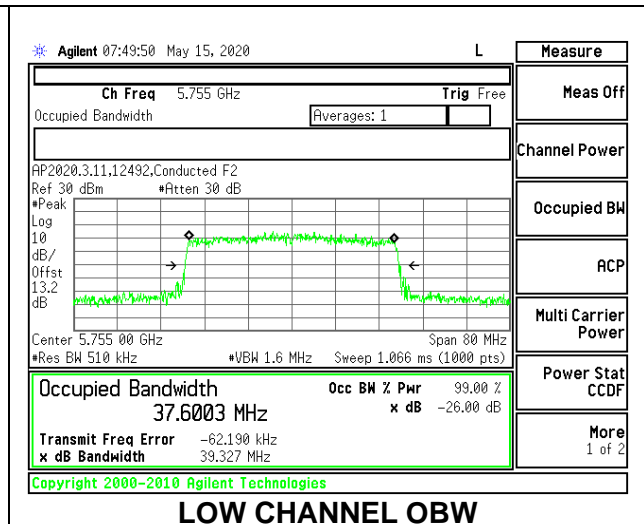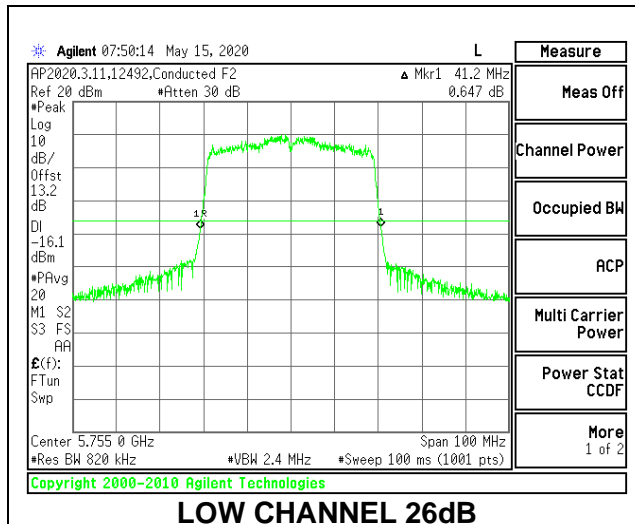



1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.20	18.7132
High	5795	20.20	18.5447

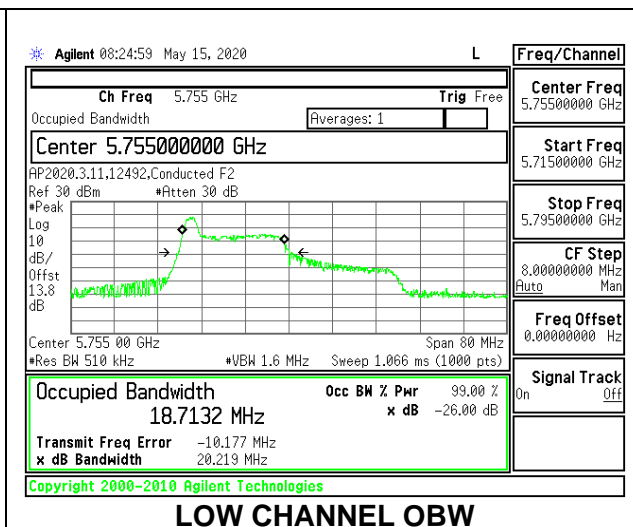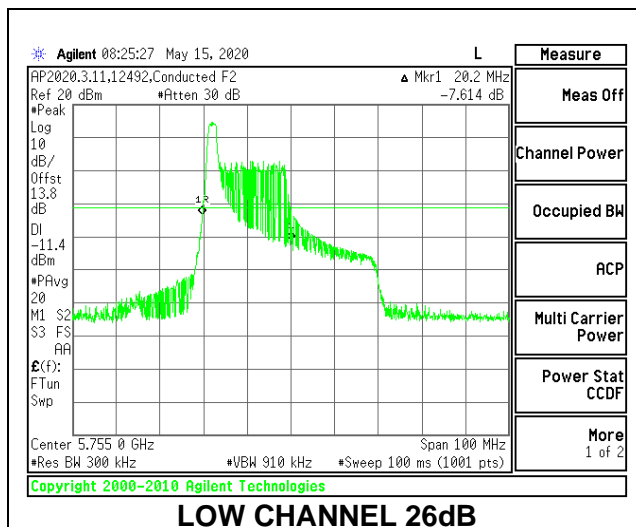



1TX Antenna 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	23.00	21.8811
High	5795	24.00	21.7746

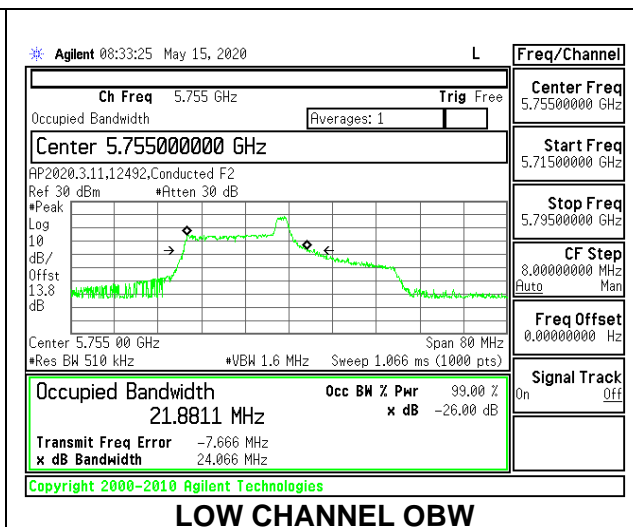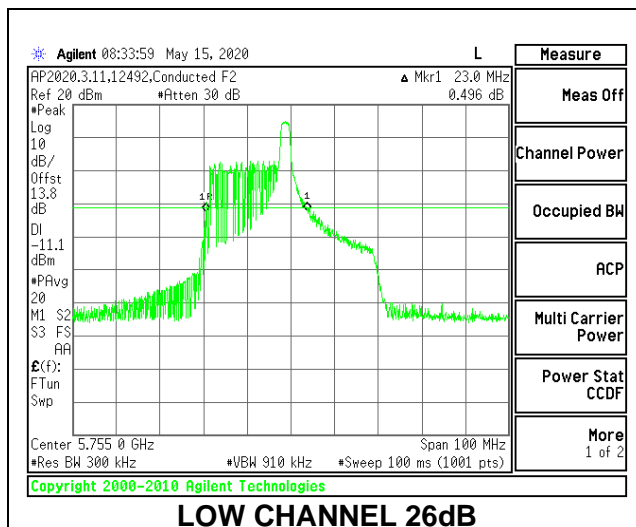



1TX Antenna 5 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.50	18.9791
High	5795	20.30	18.6752

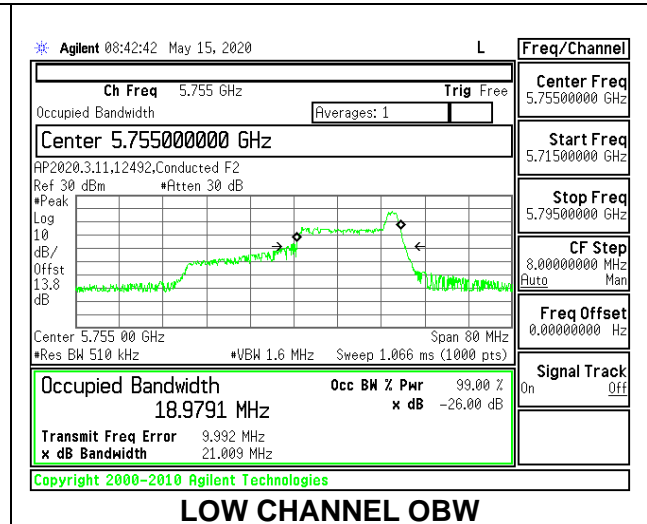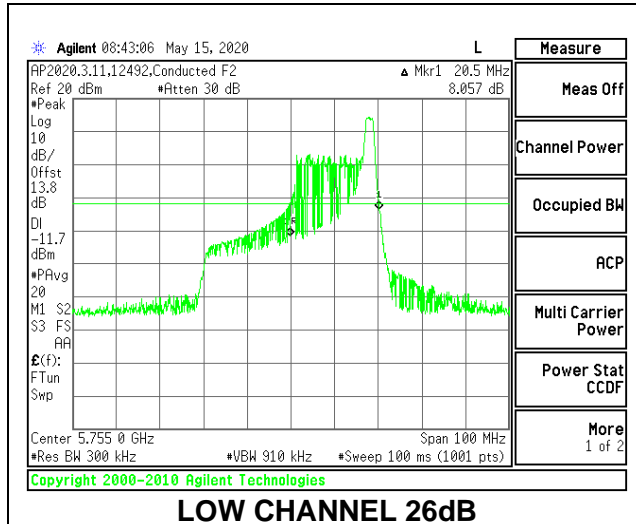

1TX Antenna 5 MODE: 484 Tones, RU Index 65



Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.00	37.3529
High	5795	41.10	37.3354

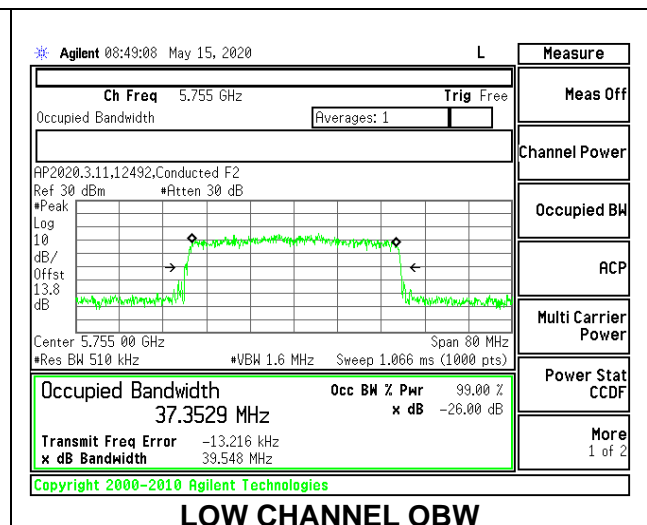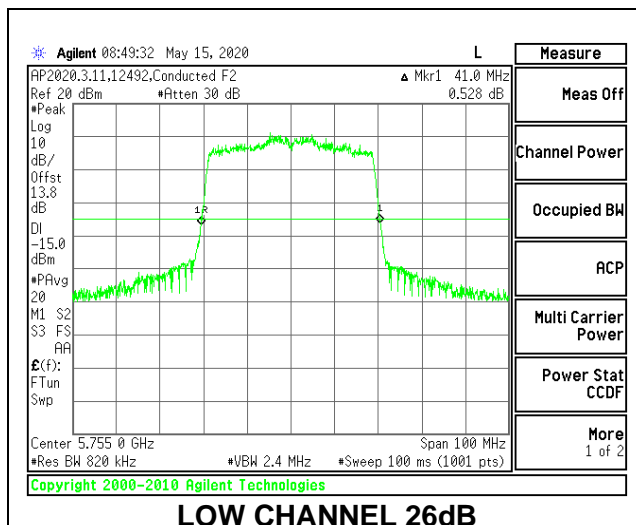



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	19.70	23.20	18.3425	18.1894
High	5795	19.60	23.20	18.3775	18.1843

LOW CHANNEL 26dB

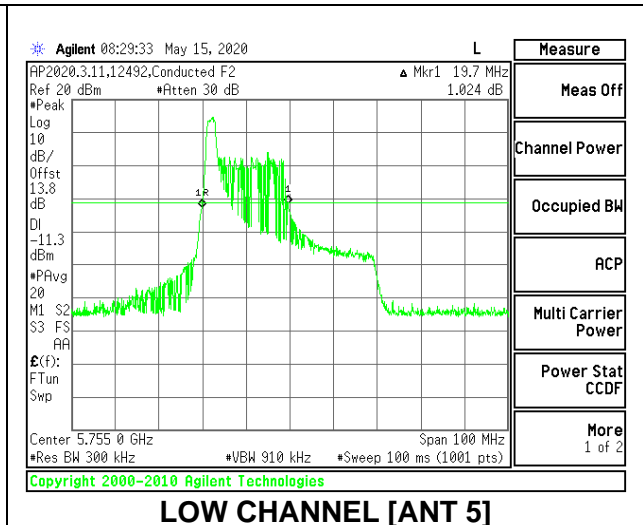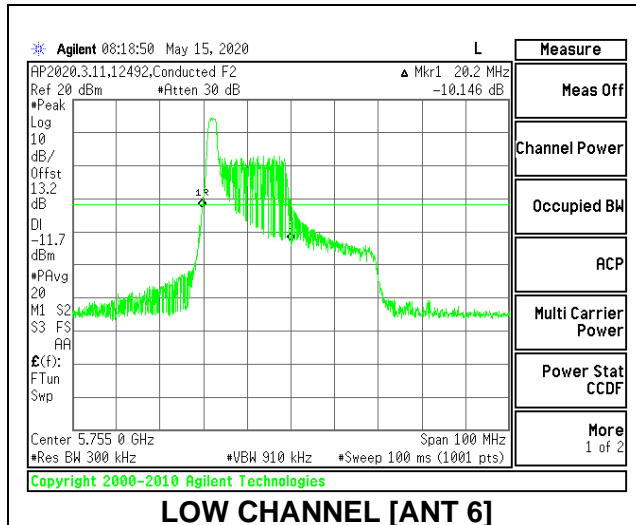



LOW CHANNEL OBW

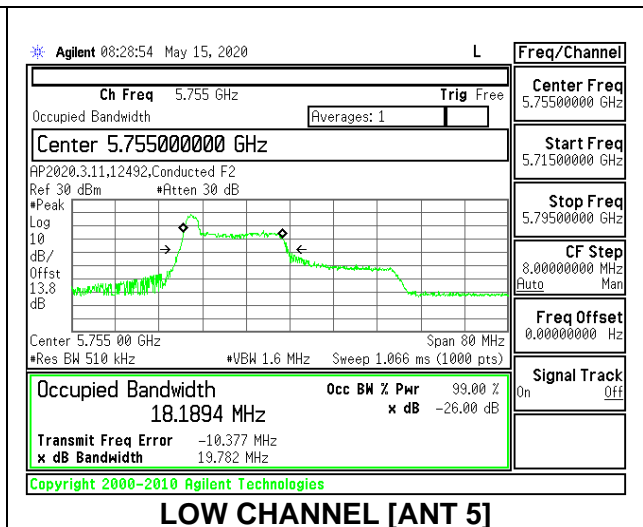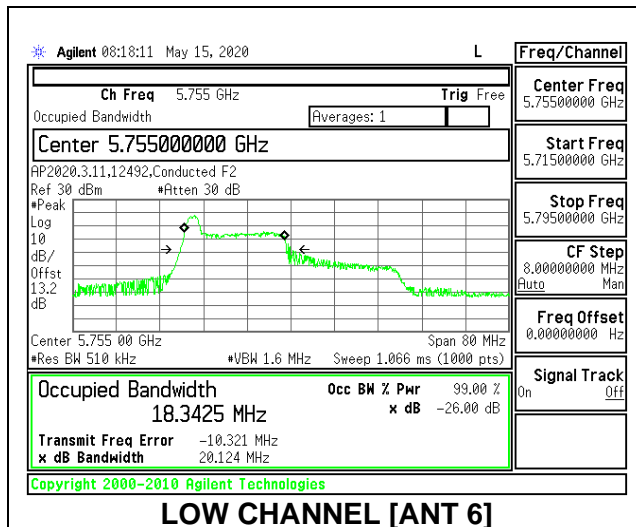



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	23.20	21.80	21.8342	21.5016
High	5795	23.20	22.30	22.4095	21.6201

LOW CHANNEL 26dB

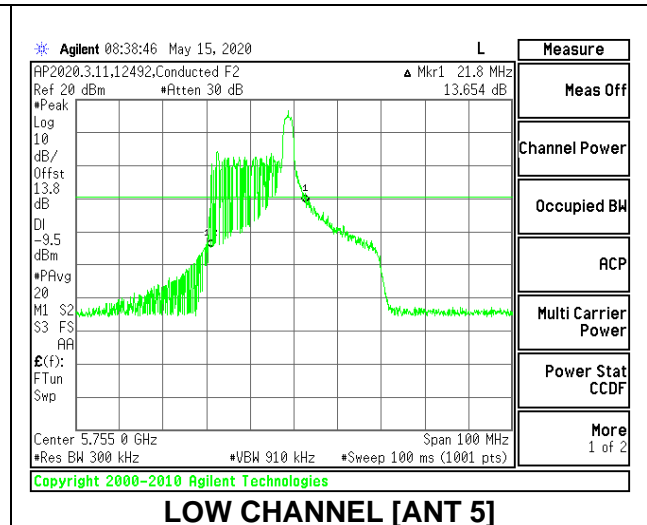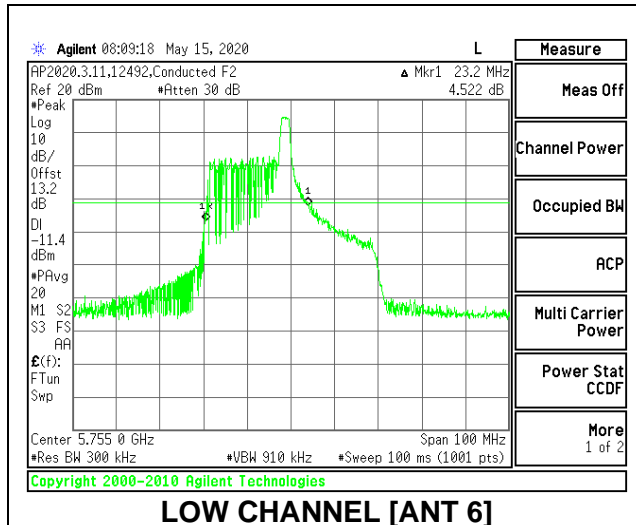



LOW CHANNEL OBW

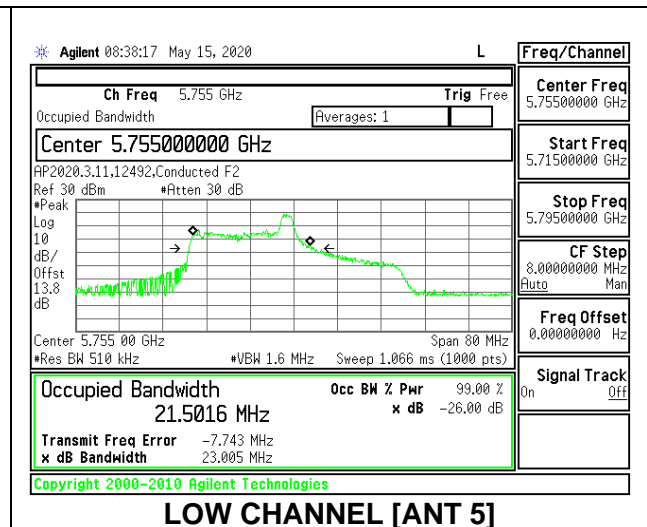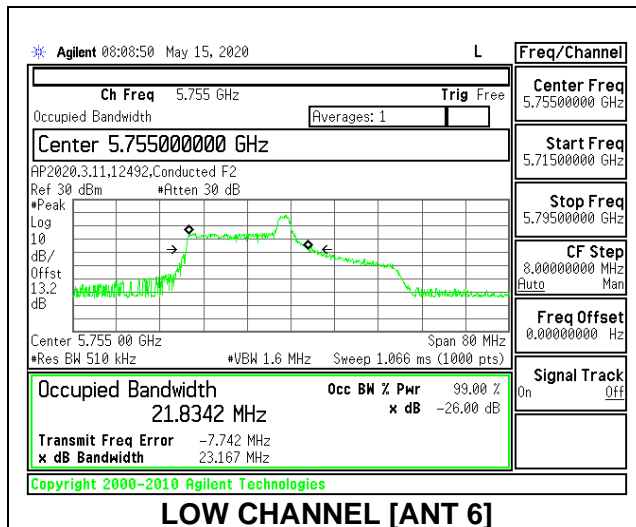



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	20.10	19.30	18.9978	18.2502
High	5795	20.30	19.20	18.9400	18.2258

LOW CHANNEL 26dB

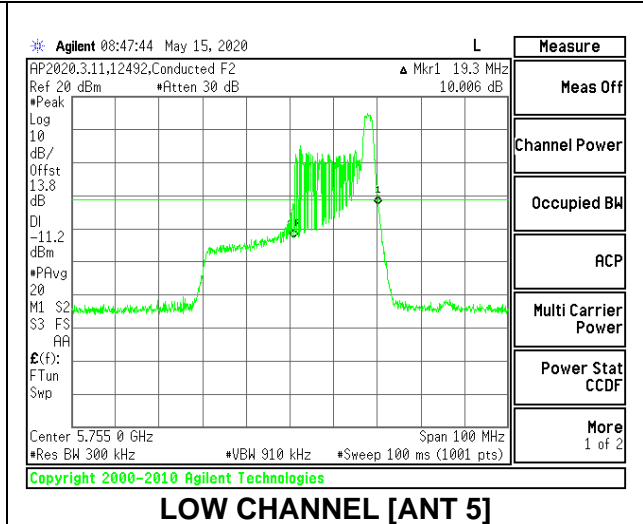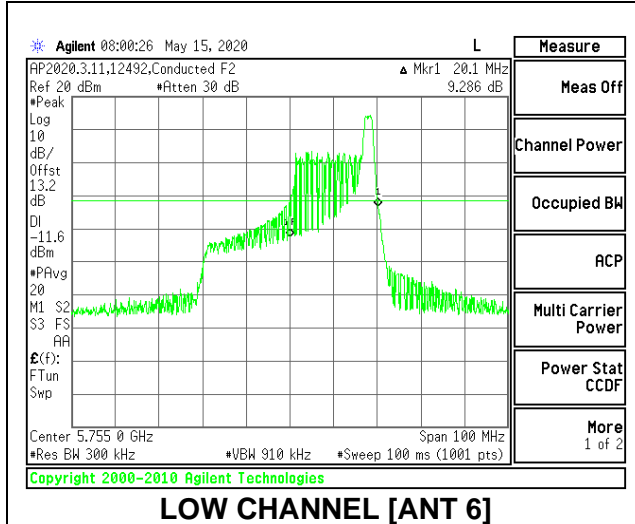



LOW CHANNEL OBW

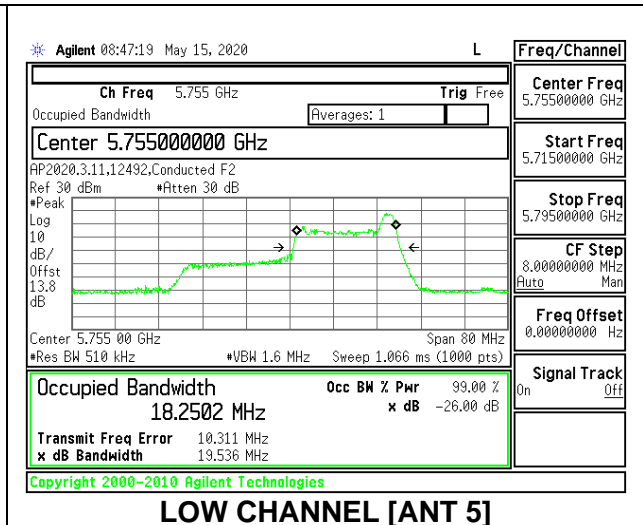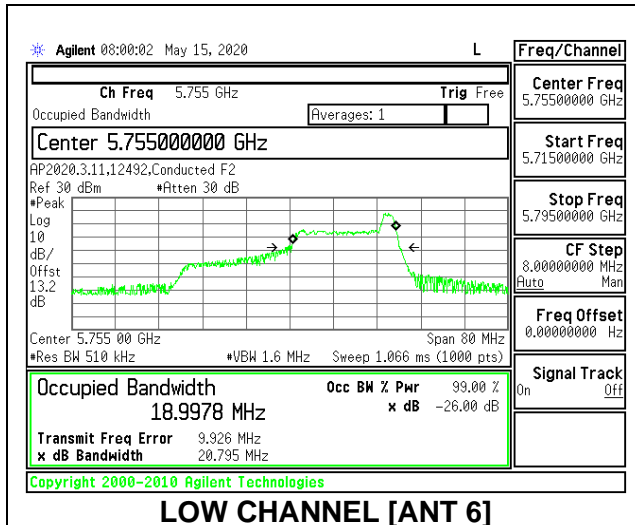



2TX Antenna 6 + Antenna 5 CDD MODE: 484 Tones, RU Index 65

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	41.00	40.70	37.3769	37.4974
High	5795	41.00	40.90	37.7144	37.4739

LOW CHANNEL 26dB

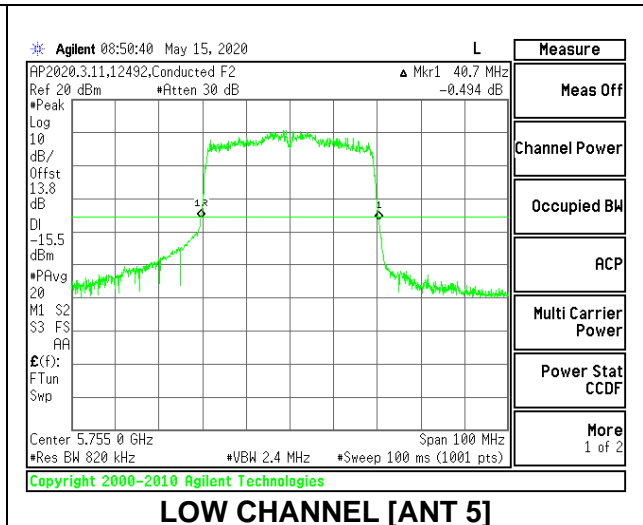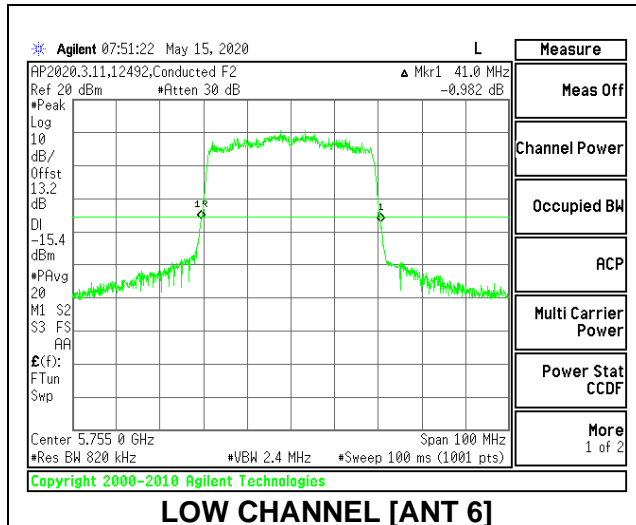


LOW CHANNEL OBW

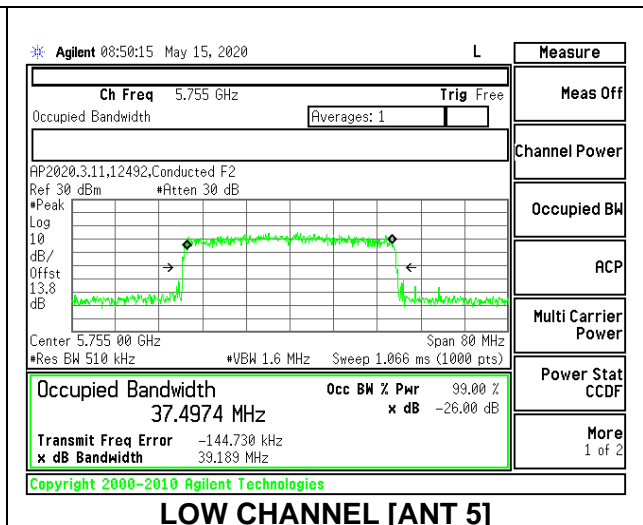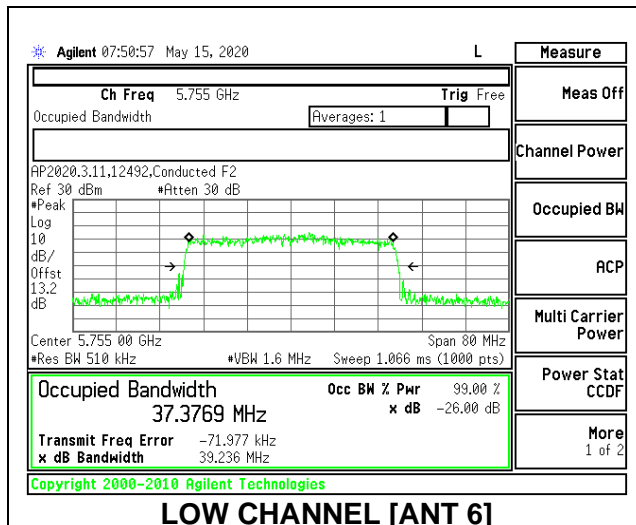

8.2.24. 802.11ax HE80 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	19.80	19.4541

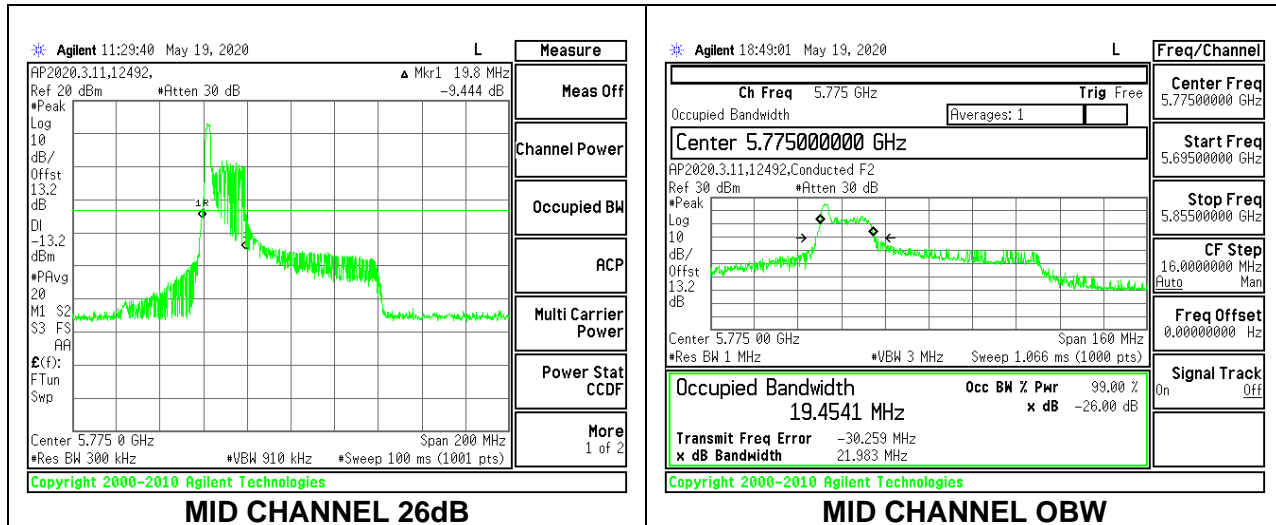



1TX Antenna 6 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	40.40	37.8527

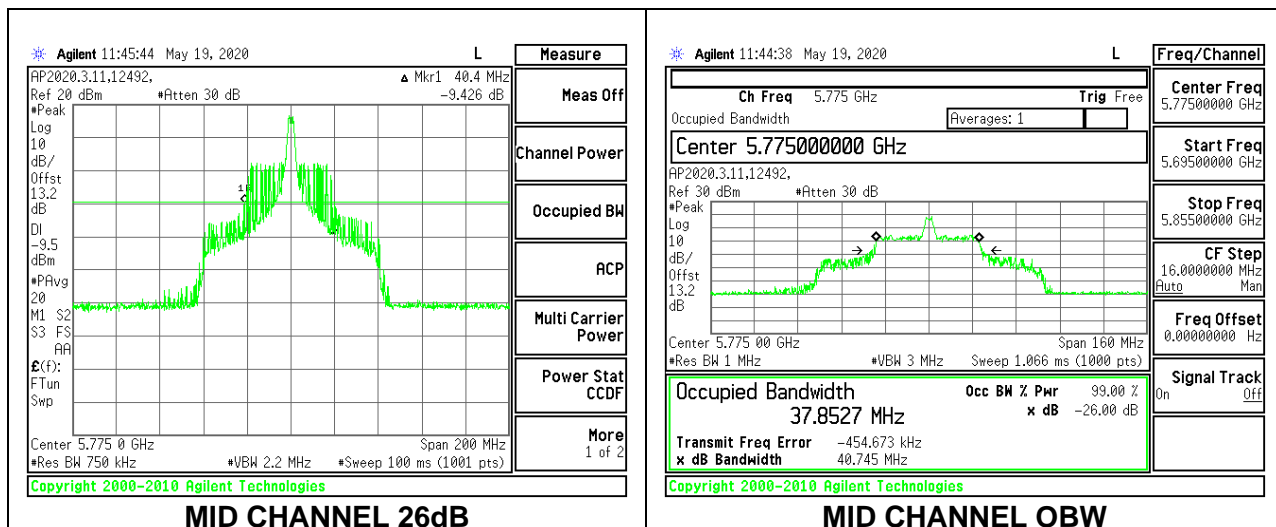



1TX Antenna 6 MODE: 26 Tones, RU Index 36

Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	21.60	21.4730

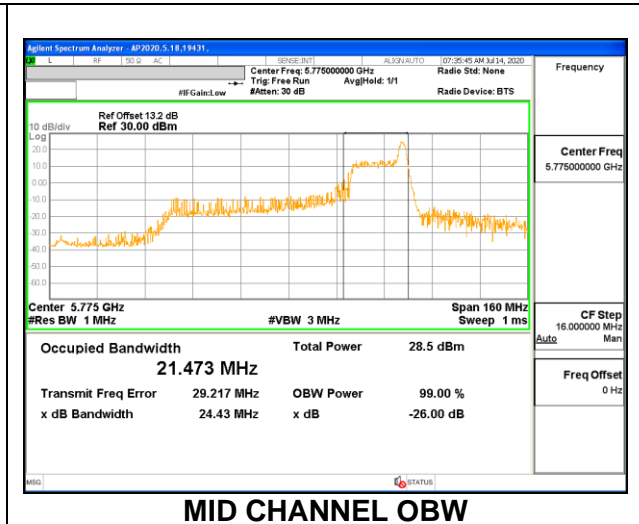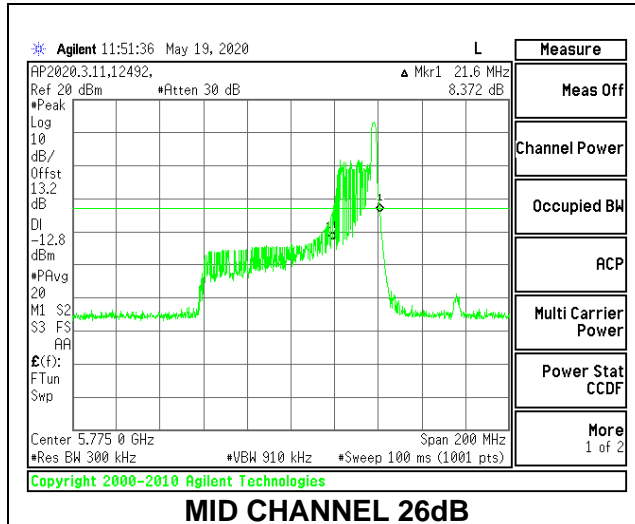



1TX Antenna 6 MODE: 996 Tones, RU Index 67

Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	84.00	76.4934

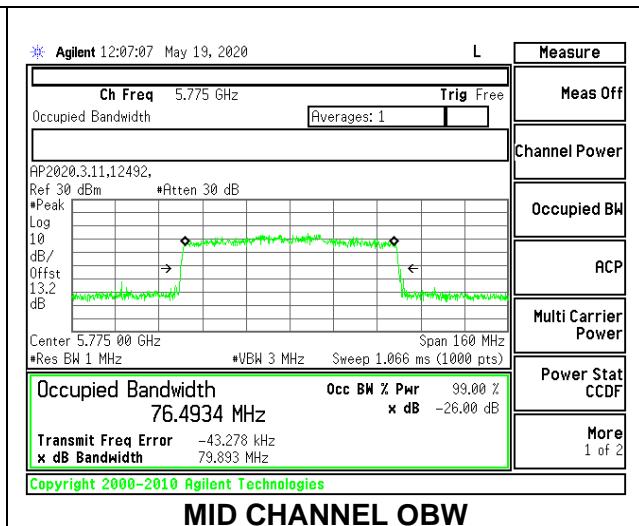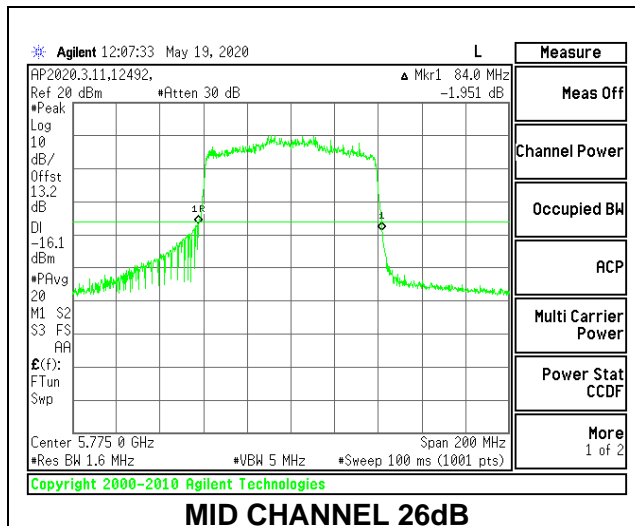



1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	20.20	19.8205

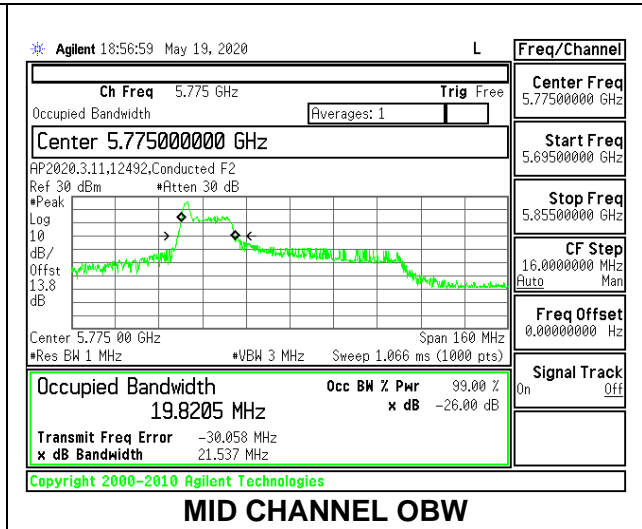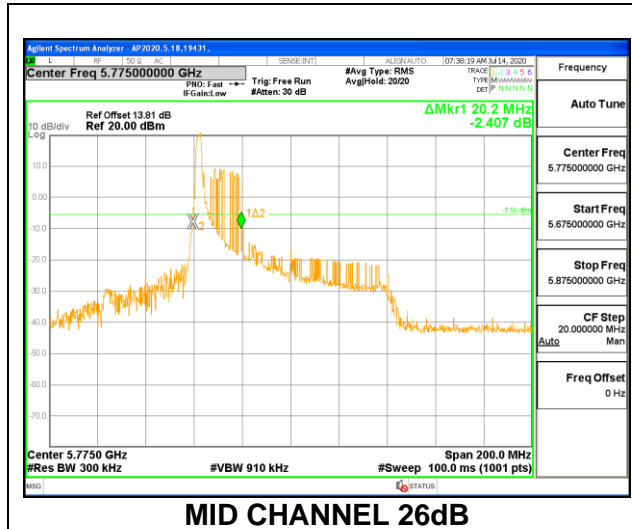



1TX Antenna 5 MODE: 26 Tones, RU Index 18

Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	40.00	38.1579

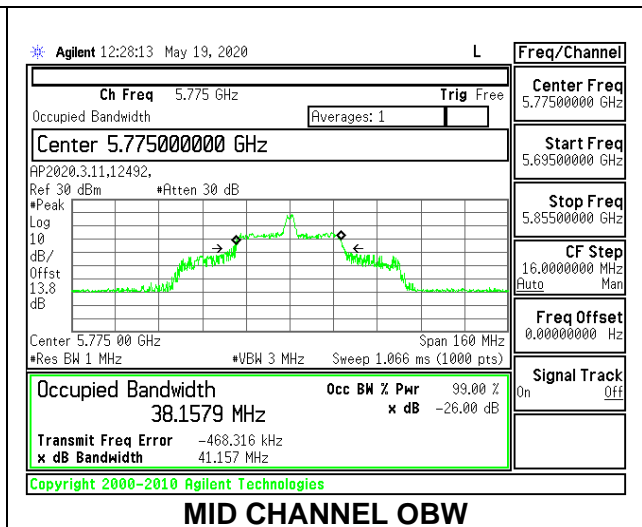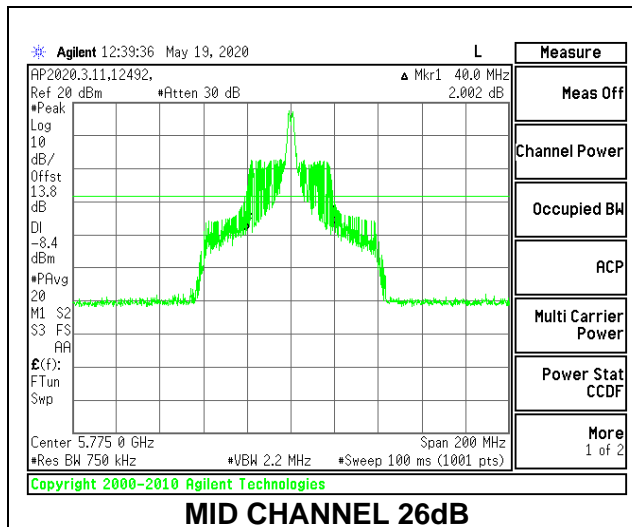



1TX Antenna 5 MODE: 26 Tones, RU Index 36

Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	21.00	19.8400

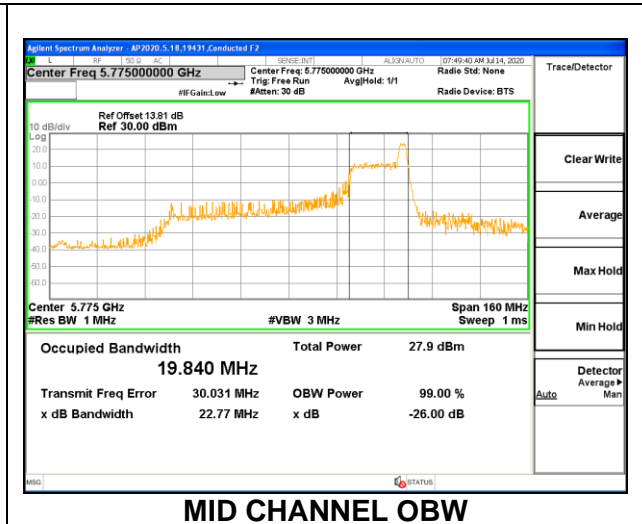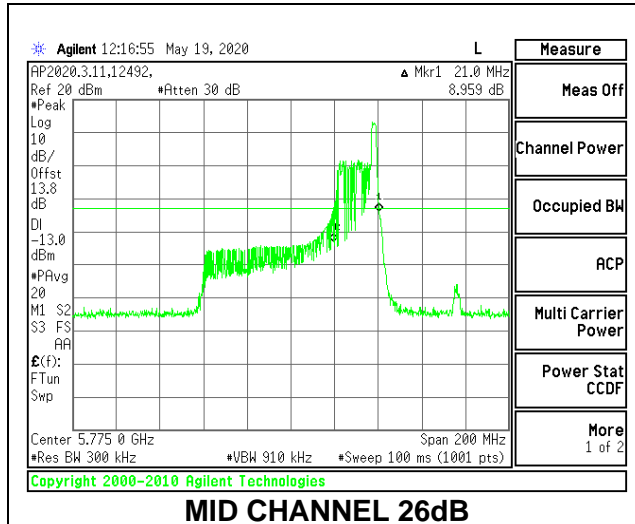

1TX Antenna 5 MODE: 996 Tones, RU Index 67



Channel	Frequency	26 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Mid	5775	83.80	76.8111

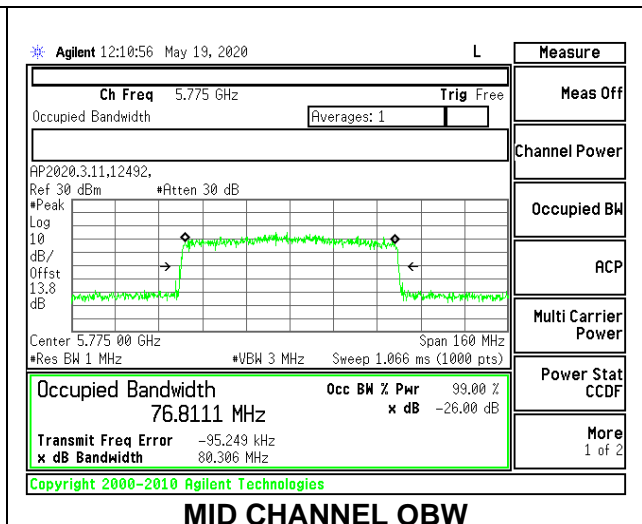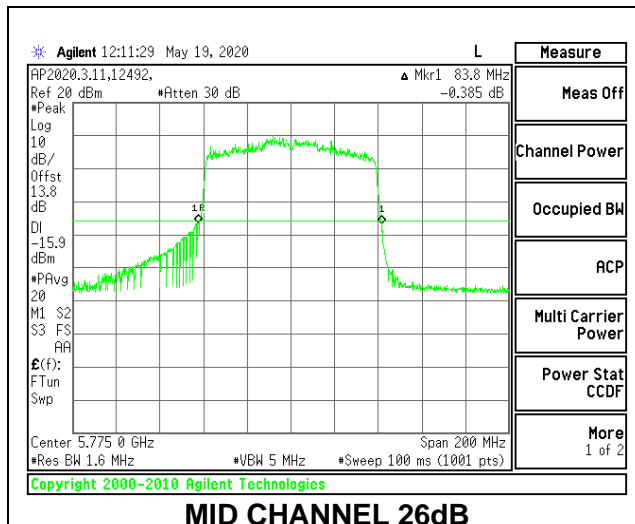



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	19.80	20.00	19.3900	19.0955

MID CHANNEL 26dB

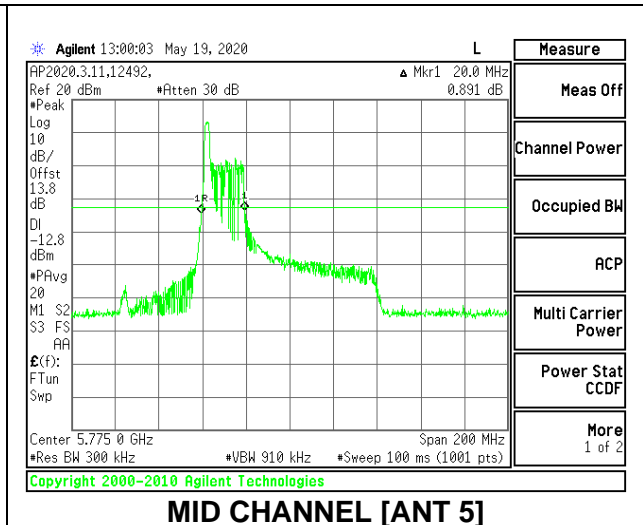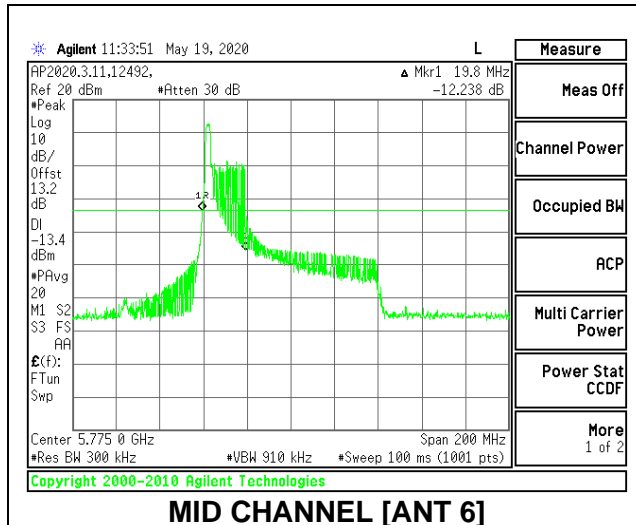



MID CHANNEL OBW

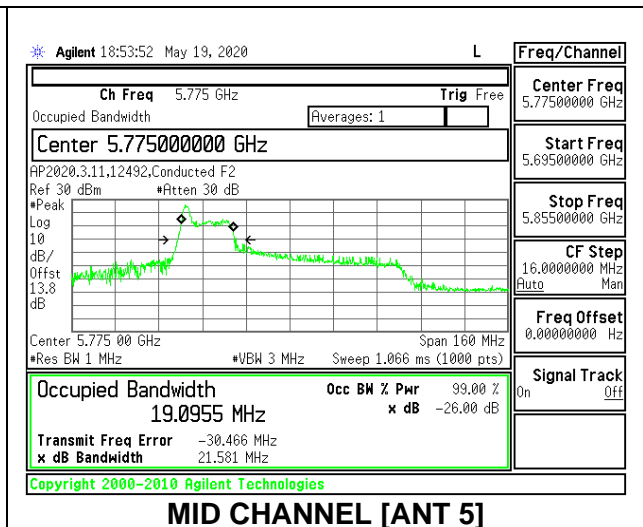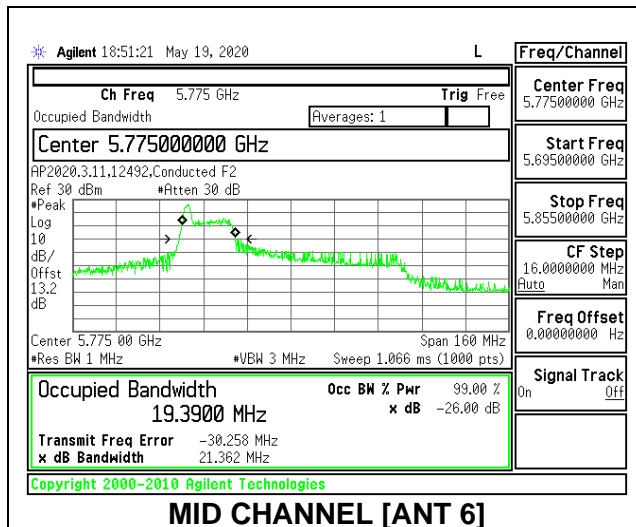



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	39.60	38.80	38.1080	36.6958

MID CHANNEL 26dB

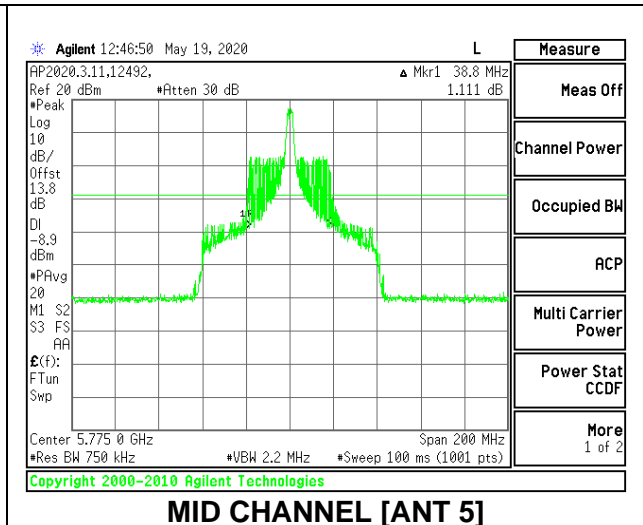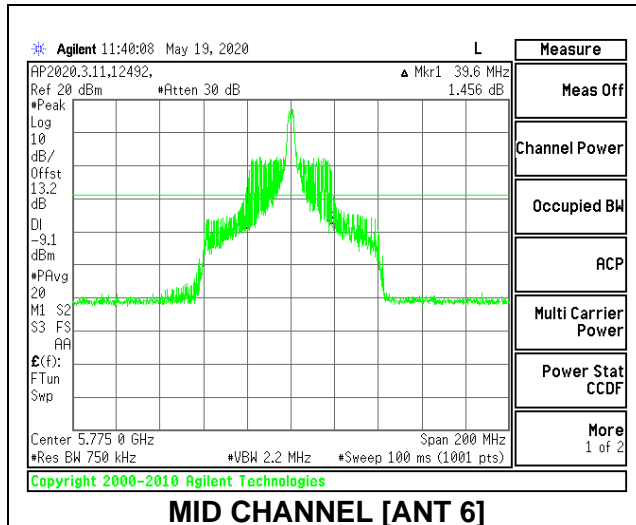



MID CHANNEL OBW

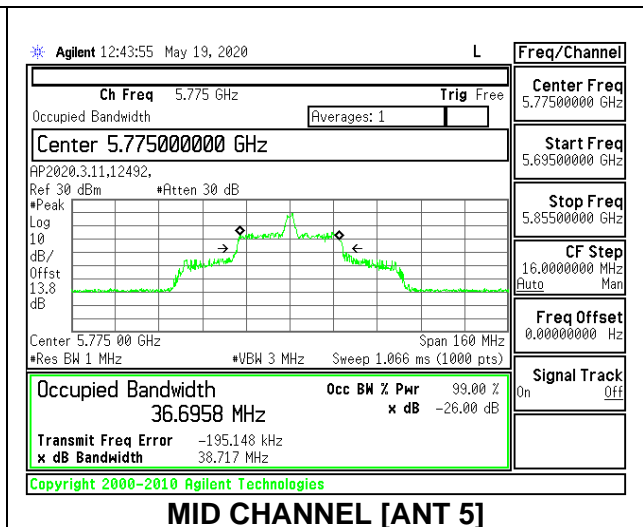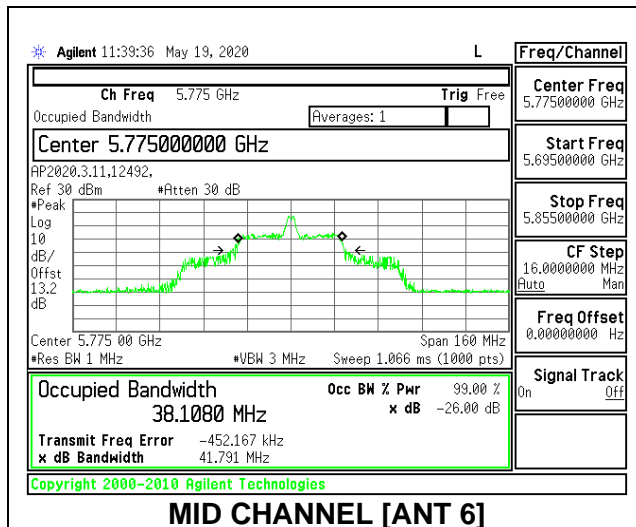



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	21.40	20.00	21.0610	1978.0000

MID CHANNEL 26dB

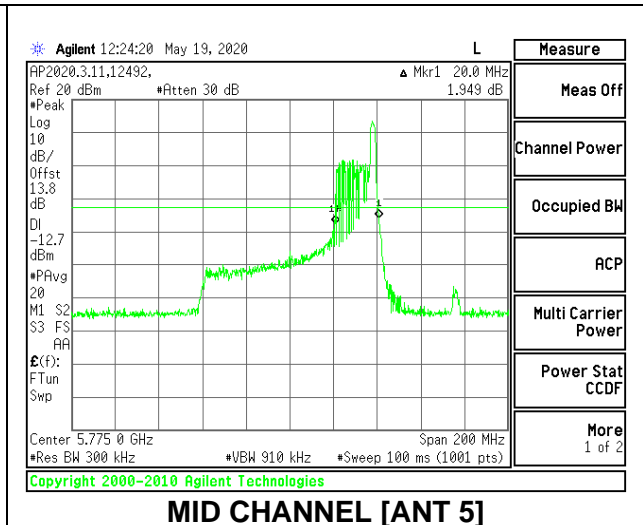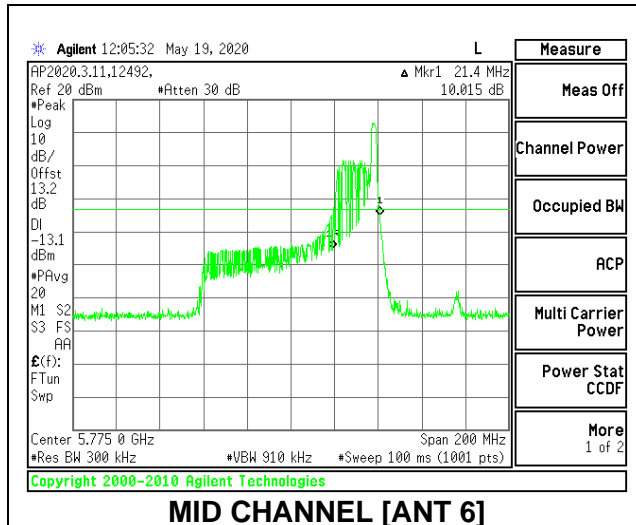



MID CHANNEL OBW

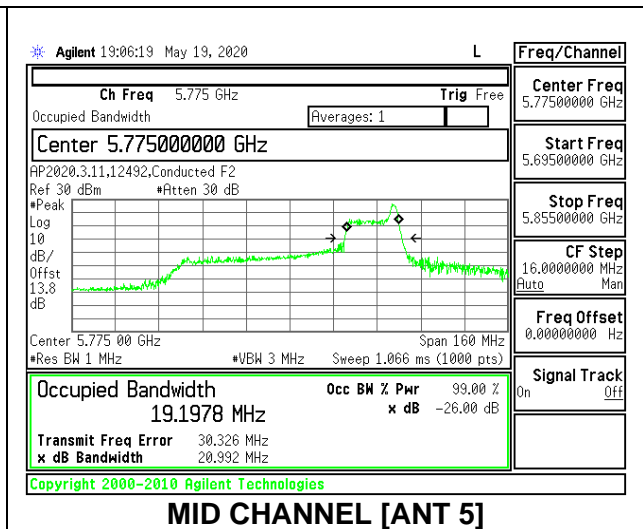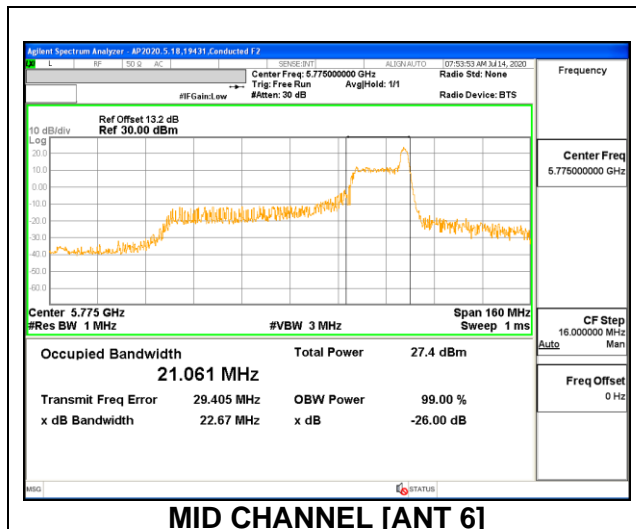

2TX Antenna 6 + Antenna 5 CDD MODE: 996 Tones, RU Index 67

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	83.40	83.00	76.5156	76.7841

MID CHANNEL 26dB

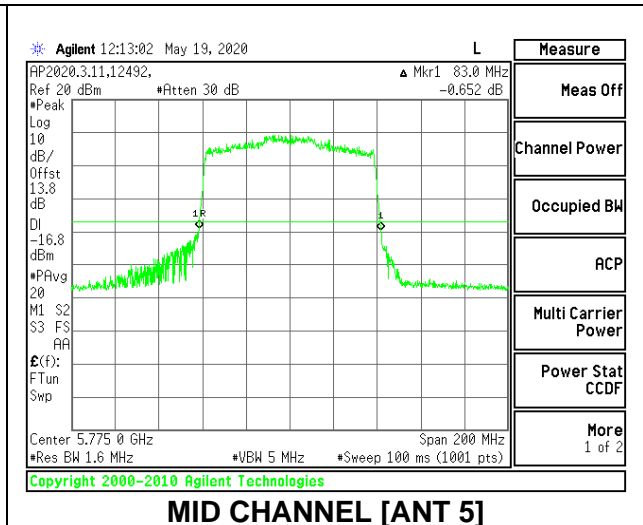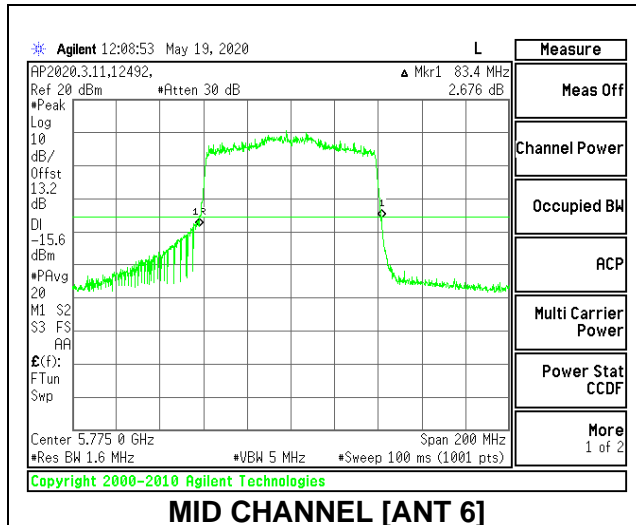

MID CHANNEL OBW

