



CERTIFICATION TEST REPORT

Report Number. : 13179116-E20V5

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2172

FCC ID : BCG-E3542A

EUT Description : SMART PHONE

Test Standard : FCC 47 CFR PART 30 MOBILE TRANSMITTER (5G)

Date Of Issue:
September 18, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0 (FREMONT)

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08/21/2020	Initial Issue	GP Chin
V2	9/9/2020	Addressed TCB's questions	GP Chin
V3	9/14/2020	Addressed TCB's questions	GP Chin
V4	9/14/2020	Addressed TCB's questions	GP Chin
V5	9/18/2020	Section 3: Updated Information of Test Sites Section 5.5: Added Test Site Diagrams Sections 8.1, 8.2, 8.3 & 8.4: Updated Info of Testers & Test Sites; correct error on Section 6	GP Chin

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY	7
4.2. DECISION RULES.....	7
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. SOFTWARE AND FIRMWARE.....	9
5.3. WORST CASE ORIENTATION.....	9
5.4. BEAM ID.....	9
5.5. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	15
7. SUMMARY TABLE	16
8. APPLICABLE LIMITS AND TEST RESULTS	17
8.1. OCCUPIED BANDWIDTH.....	17
8.1.1. OCCUPIED BANDWIDTH n260.....	18
8.1.2. OCCUPIED BANDWIDTH n261.....	24
8.2. EQUIVALENT ISOTROPIC RADIATED POWER.....	30
8.2.1. EIRP RESULTS n260 ANT M1 SISO.....	32
8.2.2. EIRP RESULTS n260 ANT M1 SISO-DUAL	33
8.2.3. EIRP RESULTS n260 ANT M1 MIMO.....	35
8.2.4. EIRP RESULTS n260 ANT M0 SISO-DUAL	36
8.2.5. EIRP RESULTS n260 ANT M2 SISO.....	37
8.2.6. EIRP RESULTS n260 ANT M2 SISO-DUAL	38
8.2.7. EIRP RESULTS n260 ANT M2 MIMO.....	39
8.2.8. EIRP RESULTS n261 ANT M1 SISO.....	40
8.2.9. EIRP RESULTS n261 ANT M1 SISO-DUAL	41
8.2.10. EIRP RESULTS n261 ANT M1 MIMO	43
8.2.11. EIRP RESULTS n261 ANT M0 SISO-DUAL.....	44
8.2.12. EIRP RESULTS n261 ANT M2 SISO	45
8.2.13. EIRP RESULTS n261 ANT M2 SISO-DUAL.....	46
8.2.14. EIRP RESULTS n261 ANT M2 MIMO	47
8.3. BAND EDGE EMISSIONS.....	48
8.3.1. BAND EDGE RESULTS n260 SISO-DUAL 1CC	50
8.3.2. BAND EDGE RESULTS n260 SISO-DUAL 2CC	62
8.3.3. BAND EDGE RESULTS n260 MIMO 1CC.....	72

8.3.4.	BAND EDGE RESULTS n260 MIMO 2CC.....	84
8.3.5.	BAND EDGE RESULTS n261 SISO-DUAL 1CC	94
8.3.6.	BAND EDGE RESULTS n261 SISO-DUAL 2CC	106
8.3.7.	BAND EDGE RESULTS n261 MIMO 1CC.....	116
8.3.8.	BAND EDGE RESULTS n261 MIMO 2CC.....	128
8.4.	RADIATED SPURIOUS EMISSIONS.....	138
8.4.1.	RADIATED EMISSIONS 30 MHz - 1 GHz n260	140
8.4.2.	RADIATED EMISSIONS 1-18 GHz n260	142
8.4.3.	RADIATED EMISSIONS 18-26.5 GHz n260	144
8.4.4.	RADIATED EMISSIONS 26.5-40 GHz n260	146
8.4.5.	RADIATED EMISSIONS 40-50 GHz n260	148
8.4.6.	RADIATED EMISSIONS 50-75 GHz n260	153
8.4.7.	RADIATED EMISSIONS 75-110 GHz n260	155
8.4.8.	RADIATED EMISSIONS 110-170 GHz n260	157
8.4.9.	RADIATED EMISSIONS 170-200 GHz n260	160
8.4.10.	RADIATED EMISSIONS 30 MHz - 1 GHz n261	162
8.4.11.	RADIATED EMISSIONS 1-18 GHz n261	164
8.4.12.	RADIATED EMISSIONS 18-26.5 GHz n261.....	166
8.4.13.	RADIATED EMISSIONS 26.5-27.5 GHz n261.....	169
8.4.14.	RADIATED EMISSIONS 28.35-30 GHz n261.....	174
8.4.15.	RADIATED EMISSIONS 30-40 GHz n261.....	177
8.4.16.	RADIATED EMISSIONS 40-50 GHz n261.....	179
8.4.17.	RADIATED EMISSIONS 50-75 GHz n261.....	181
8.4.18.	RADIATED EMISSIONS 75-100 GHz n261.....	184
8.5.	FREQUENCY STABILITY.....	187
9.	SETUP PHOTOS.....	189
	APPENDIX A.....	190
1.	50-80 GHz Keysight M1970V	190
2.	75-110 GHz Keysight M1970W	191
3.	110-170 GHz VDI WR6.5SAX	192
4.	170-260 GHz VDI WR4.3SAX	193
5.	35-50 GHz CMI HO22R HORN ANTENNA	194
6.	50-75 GHz CMI HO15R HORN ANTENNA	195
7.	75-110 GHz CMI HO10R HORN ANTENNA	196
8.	110-170 GHz CMI HO6R HORN ANTENNA	197
9.	170-260 GHz CMI HO4R HORN ANTENNA	198

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014,U.S.A

EUT DESCRIPTION: SMART PHONE

MODEL: A2172

SERIAL NUMBERS: G6TD200904FR
G6TCM01MQ5HY
G6TCN05TQ5HH

DATE TESTED: JUNE 7th – AUGUST 17th , 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 30 Mobile Transmitter (5G)	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



GIA-PIAO (GP) CHIN
SENIOR TEST ENGINEER
UL Verification Services Inc.



STEVE AGUILAR
TEST ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 30.
3. ANSI C63.26-2015
4. KDB 842590 D01 Upper Microwave Flexible Use Service v01r01
5. KDB 971168 D01 Power Meas. License Digital Systems v03r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☐ Chamber A	☐ Chamber D	☐ Chamber I
☒ Chamber B - Below 18 GHz	☐ Chamber E	☐ Chamber J
☒ Chamber 1 - mmWave	☐ Chamber F	☐ Chamber K
☒ Chamber 2 - mmWave	☐ Chamber G	☐ Chamber L
☒ Chamber 3 - mmWave	☐ Chamber H	☐ Chamber M

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

Chambers 1, 2 and 3 are fully-anechoic chambers dedicated to make measurements to TRP limits from 18-40 GHz, and field strength, EIRP and TRP measurements at and above 40 GHz. The measurement antenna is nominally 1.5 m high in accordance with C63.10-2013, procedures developed by the C63 mmWave Joint Task Group for inclusion in the next editions of C63.10 and C63.26, and applicable FCC KDB documents. The absorber reflectivity fully supports chamber performance over this frequency range. The dimensions of the chambers are approximately 9 m L by 6 m W by 5.2 m H for chamber 1 and 6.8 m L by 3.7 m W by 3.1 m H for chambers 2 and 3.

4. CALIBRATION AND UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Worst Case Radiated Disturbance >40000 MHz	2.85 dB
Temperature	±0.9 °C
Voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

This test report addresses the 5G NR operational mode on n260 and n261 bands.

Two FR2 RFIC Chipset + Antennas sets are used. Both Chipsets are identical. Chipset 1 can transmit on antenna M1 or antenna ANT M0. Chipset 2 transmits on antenna M2 only.

Manufacturer declares that antenna M0 transmits approximately 15-16 dB lower power than antenna M1, therefore antenna M1 was used for full measurements on Chipset 1 in this report. Spot-checks on transmit power of antenna M0 were performed with selected modes. Measurements on Chipset 2 were performed with antenna M2 active.

Manufacturer provided the Beam ID settings that yield the highest EIRP for each antenna by the EIRP Simulation tool. These Beam ID settings were used for all tests. All tests were performed in a non-signaling, stand-alone mode of operation.

5.2. SOFTWARE AND FIRMWARE

EUT Firmware versions:

WiFi: 20_10_619_14
BT: 18.1.148.558
Cell: 0.28.03-1

5.3. WORST CASE ORIENTATION

For all 5G NR FR2 Bands, the worst-case scenario for all measurements is based on the EIRP measurement investigation results, comparing to TRP limit to demonstrate compliance. EIRPs were measured on BPSK, QPSK, 16QAM and 64QAM modulations. It was found that QPSK results were worst case.

The fundamental and radiated spurious emission were investigated in three orthogonal orientations X (landscape), Y (portrait), Z (flatbed) and Roll, where is applicable. The final optimum position resulting in the highest EIRP for the frequency or band under investigation is placed on an open air fixture allowing no blockage of the signal as measured by the receiving antenna.

5.4. BEAM ID

In all tests, the following Beam ID settings of each antenna were applied for final measurements.

n260 - Peak BID		
Antenna	BID	Paired with
M0	8	136
M1	20	148
M2	33	161

n261 - Peak BID		
Antenna	BID	Paired with
M0	14	142
M1	19	147
M2	153	25

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
LAPTOP + Adapter	Apple	MacBook Pro	HRP046790
Kanzi-USB Adapter	Apple	---	325191
LAPTOP + Adapter	Apple	MacBook Pro	C02VJ0ZZHV2P
Kanzi-USB Adapter	Apple	---	325B8C
LAPTOP + Adapter	Apple	MacBook Pro	C2QP600QG974
Kanzi-USB Adapter	Apple	---	32535E
USB Power Adapter	Apple	A1357	--
LAPTOP + Adapter	Apple	MacBook Pro	HRP046790


I/O CABLES

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	2	USB Micro	Shielded	0.9 – 2.0	--
2	Data	1	--	Shielded	0.8	--
3	Data	1	--	Shielded	0.06	--
4	DC Power	1	Clip leads	Un-shielded	1.0	--
5	AC Line	1	3-prong	Un-shielded	1.0	--


TEST SETUP

All testing was performed using FTM (Factory Test Mode) software at continuous Tx operation. When implemented out in the field, the EUT will operate with a maximum uplink configuration (i.e., a maximum uplink duty cycle of 100%).


RF TESTS

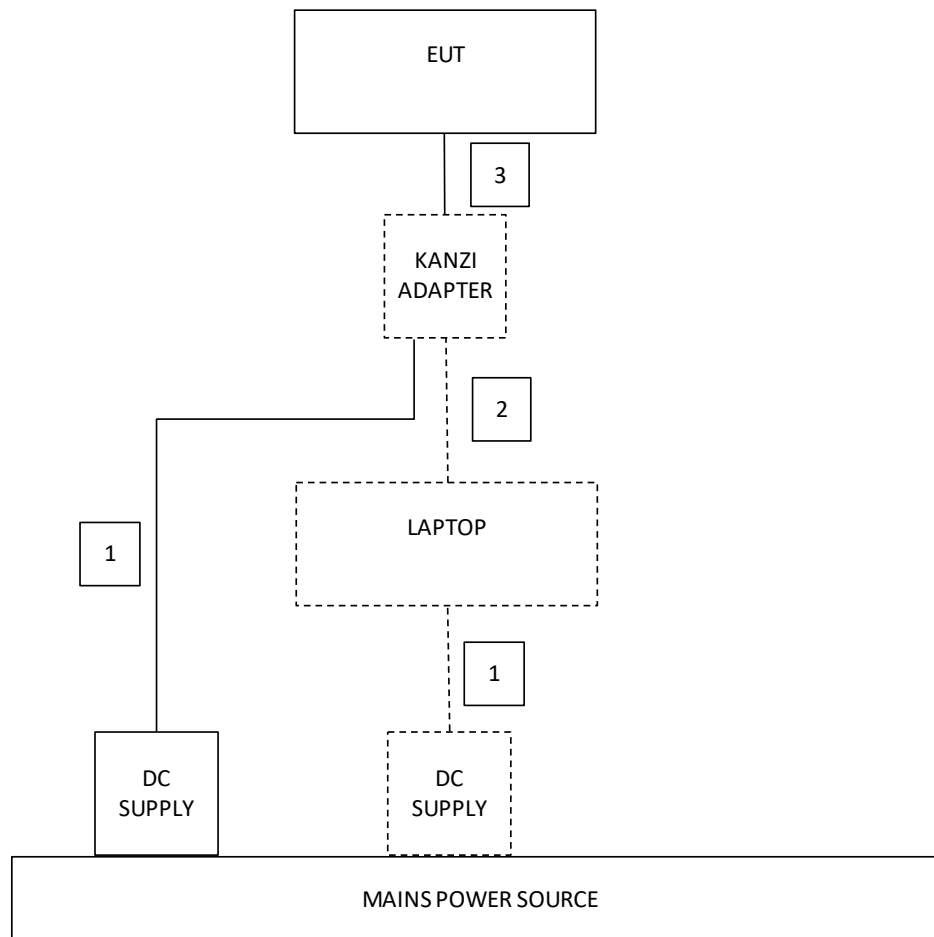


TEST SITE DIAGRAM – Below 1 GHz

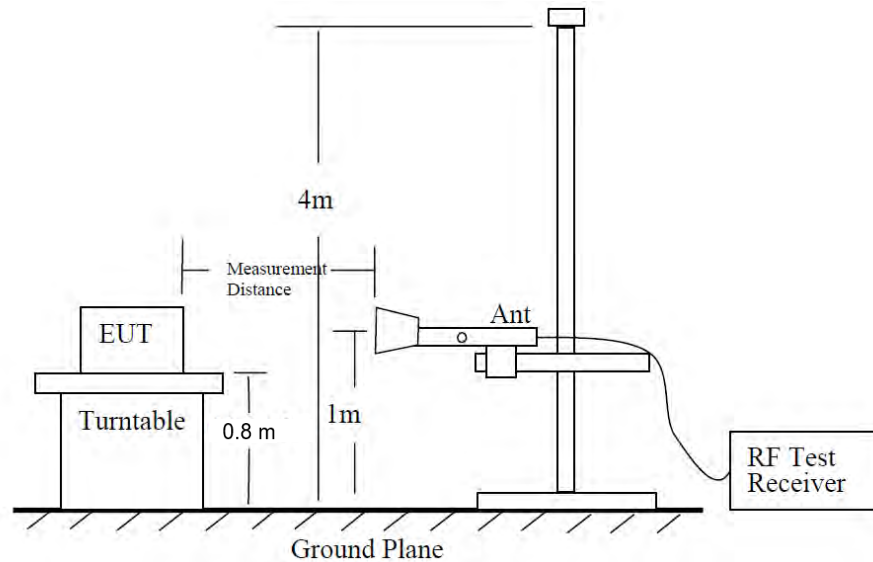


TEST SITE DIAGRAM – 1-18 GHz

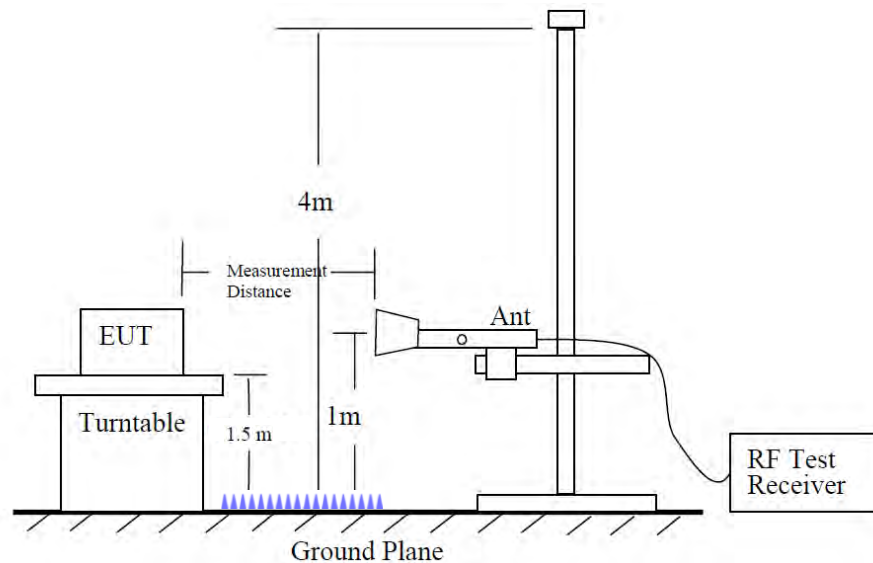

TEST SITE DIAGRAM – Above 18 GHz & mmWave

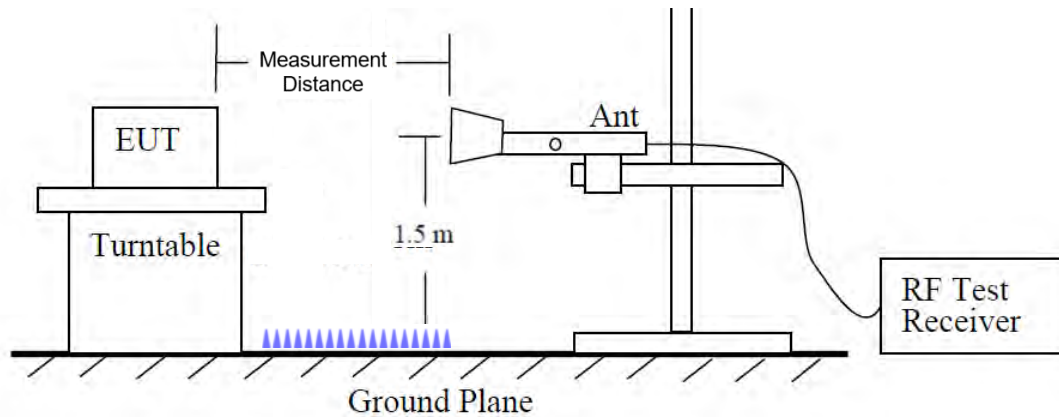

FREQUENCY STABILITY

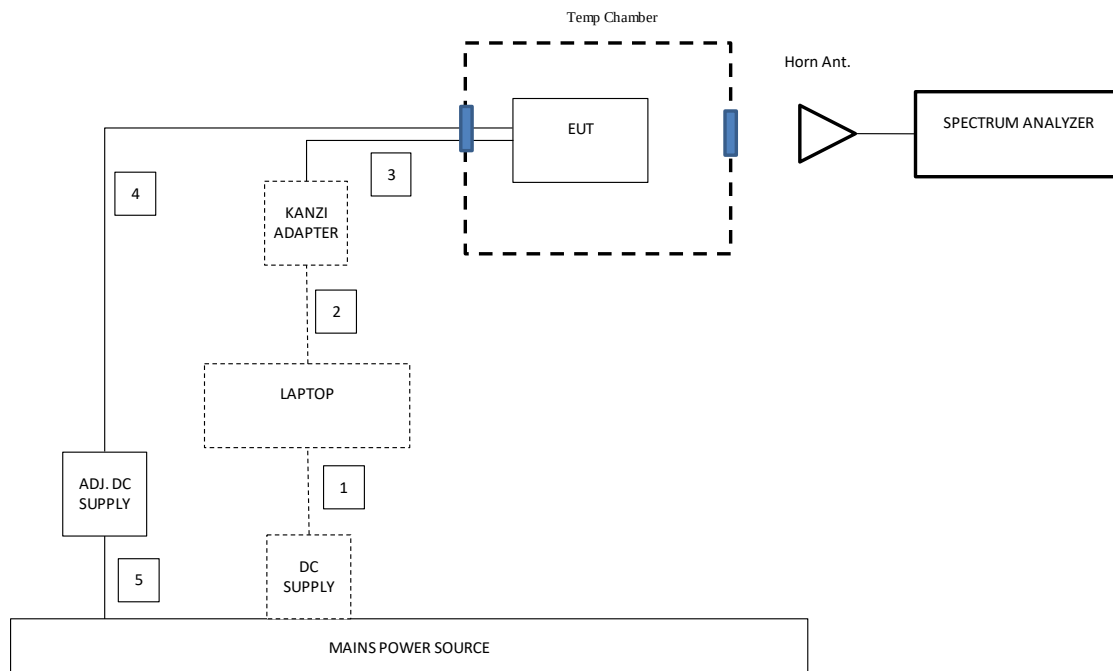

FAR-FIELD DISTANCE AND MEASUREMENT DISTANCE

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable.

The measurement distance is in the far field per formula $2D^2/\lambda$ where D is the larger dimension of the antenna. For fundamental or band edge emissions, the largest far-field distance of either the EUT antenna or measurement antenna shall be used. For above 18 GHz spurious emissions, the far-field distance will be based on the measured antenna. In this case, the measurement antenna has the largest far-field distance. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest EIRP reading on the receive spectrum analyzer.

Frequency Range (GHz)	Wavelength (m)	Far Field Distance (m)	Measurement Distance Used (m)
18-26.5	0.0113	3.39	3.50
26.5-40	0.0075	2.67	3.00
40-50	0.0060	1.61	3.00
50-75	0.0040	1.05	1.50
75-110	0.0027	0.70	1.00
110-170	0.0018	0.02	1.00
170-200	0.0015	0.33	0.50

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst case polarization/positioning.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Local ID	Last Cal	Cal Due
Spectrum Analyzer, PXA, 3Hz to 50GHz w/Ext. Mixer	Keysight	N9030A	MY52350427	1/23/2020	1/23/2021
Spectrum Analyzer, PXA, 3Hz to 50GHz w/Ext. Mixer	Keysight	N9030A	PRE0213097	6/29/2020	6/29/2021
EMI Test Receiver	Rohde & Schwarz	FSW50	PRE0211337	4/30/2020	4/30/2021
EMI Test Receiver	Rohde & Schwarz	FSW50	PRE0211887	5/12/2020	5/12/2021
EMI Test Receiver	Rohde & Schwarz	ESW44	PRE0203385	2/22/2020	2/22/2021
Antenna, Horn 18-26.5 GHz	ARA	MWH-1826/B	PRE0079151	11/7/2019	11/7/2020
Antenna, Horn 26.5-40 GHz	ARA	MWH-2640/B	PRE0079317	11/7/2019	11/7/2020
Antenna, Horn 18-26.5 GHz	ARA	MWH-1826/B	PRE0182199	4/27/2019	4/27/2021
Antenna, Horn 26.5-40 GHz	ARA	MWH-2640/B	PRE0182202	5/27/2020	5/27/2021
Antenna, Horn 18-26.5 GHz	ARA	MWH-1826/B	PRE0213446	6/19/2020	6/19/2021
Antenna, Horn 26.5-40 GHz	ARA	MWH-2640/B	PRE0212449	6/25/2020	6/25/2021
Antenna, Horn 18-26.5 GHz	ARA	MWH-1826/B	PRE0212447	6/25/2020	6/25/2021
Antenna, Horn 26.5-40 GHz	ARA	MWH-2640/B	PRE0212448	6/19/2020	6/19/2021
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	PRE0077927	1/22/2020	1/22/2021
Antenna, Double Ridge Guide Horn Antenna 700MHz to 18GHz	A.H. Systems, Inc.	SAS-571	PRE0078352	1/25/2020	1/25/2021
Amplifier, 9KHz to 1GHz, 32dB	Sonoma Instruments	310	PRE0180176	7/14/2020	7/14/2021
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	PRE0077974	5/20/2020	5/20/2021
Amplifier, 1 - 18GHz	MITEQ	AFS42-00101800-25-S-42	PRE0078089	5/11/2020	5/11/2021
Environmental Chamber	Thermostat Industries	SE-600-10-10	PRE0079138	11/20/2020	11/20/2021
Digital Multimeter	Fluke	87V	PRE0073921	1/22/2020	1/22/2021
50V/3A Adj. DC Power Supply	Rigol	DP712	T1746	CNR	CNR
Horn antenna, 35-50 GHz	CMI	HO22R	--	9/13/2019	9/13/2020
LNA, 40-50 GHz	Spacek Labs	SL4510-33-4W	14J05	9/24/2019	9/24/2020
Filter Low Pass	Spacek Labs	LPF5-50-8-22	T1099	9/24/2019	9/24/2020
50-75 GHz Horn	C M i	HO15R	H15-1	9/13/2019	9/13/2020
LNA, 50-75 GHz	Vivatech	VTNLA-15-6018-FB	2013051	9/19/2019	9/19/2020
Waveguide Harmonic Mixer, 50 to 80 GHz	Keysight	M1970V	MY51390830	12/20/2019	12/20/2020
75-110 GHz Horn	C M i	HO10R	H10-1	9/13/2019	9/13/2020
LNA, 75-110 GHz	Spacek	SLW-22-5	15J04	9/20/2020	9/20/2020
Waveguide Harmonic Mixer, 75 to 110 GHz	Keysight	M1970W	MY51430784	12/20/2019	12/20/2020
110-170 GHz Horn	C M i	HO6R	H06-1	9/13/2019	9/13/2020
LNA 110-170 GHz	VivaTech	VTNLA-01S01	2015085	9/23/2019	9/23/2020
110-170 GHz Downconverter	VDI	WR6.5SAX	PRE0209972	4/7/2020	4/7/2021
170-260 GHz Horn	C M i	HO4R	H04-1	9/13/2019	9/13/2020
170-260 GHz Downconverter	VDI	WR4.3SAX	PRE0212241	5/22/2020	5/22/2021
UL EMC Radiated Software	Version	Rev.9.5.06			

All horn antennas at and above the 33-50 GHz band are standard gain horns. In accordance with ANSI C63.10 clause 4.4.3 (a) Standard gain horns need not be periodically recalibrated, unless damage or deterioration is suspected or known to have occurred. If a standard gain horn is not periodically recalibrated, then its critical dimensions (see IEEE Std 1309-2005) shall be verified and documented on an annual basis.

UL measures the critical dimensions on an annual basis and checks for damage and deterioration before each test.

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	Radiated	Compliant
2.1046 30.202	Equivalent Isotropic Radiated Power (EIRP)	+43 dBm	Radiated	Compliant
2.1051 30.203	Out-of-Band Emissions at the Band Edge	-13 dBm/MHz for All out-of-band emissions. -5 dBm/MHz from the band edge up to 10% of the channel BW	Radiated	Compliant
2.1051 30.203	Spurious Emissions	-13 dBm/MHz for all out-of-band emissions	Radiated	Compliant
2.1055	Frequency Stability	N/A	Radiated	Compliant

8. APPLICABLE LIMITS AND TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART

FCC: §2.1049

LIMIT

For reporting purposes only

TEST PROCEDURES

99% bandwidth measurement function of the signal analyzer was used to measure 99% occupied.

- RBW = 1 – 5% of OBW
- VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize

KDB 842590 D01 Upper Microwave Flexible Use Service v01 Section 4.3
ANSI C63.26-2015 Clause 5.4.3.

All modulations were investigated in SISO/SISO-Dual/MIMO to determine worst case configuration. All modes of operations were investigation and results are reported in this section.

RESULTS

See the following pages.

TESTED BY:

Employee IDs: 19296 & 19459, n261 band, Chamber 1
Employee IDs: 19470 & 19437, n260 band, Chamber 2

8.1.1. OCCUPIED BANDWIDTH n260

RESULTS

n260 ANT M1 Ant, Full-RB


Control System	Modulation	Channel	Bandwidth	CCs Active	OBW (MHz)
SISO-DUAL	BPSK	Mid	50	1	45.85
MIMO	BPSK	Mid	100	1	93.43
SISO-DUAL	BPSK	Mid	50	2	95.36
MIMO	BPSK	Mid	100	2	189.88
SISO	QPSK	Mid	50	1	45.86
SISO-DUAL	QPSK	Low	50	1	45.51
SISO-DUAL	QPSK	Mid	50	1	45.77
SISO-DUAL	QPSK	High	50	1	45.57
MIMO	QPSK	Mid	50	1	45.37
SISO	QPSK	Mid	100	1	91.62
SISO-DUAL	QPSK	Low	100	1	92.11
SISO-DUAL	QPSK	Mid	100	1	92.67
SISO-DUAL	QPSK	High	100	1	92.35
MIMO	QPSK	Mid	100	1	93.44
SISO	QPSK	Mid	50	2	95.38
SISO-DUAL	QPSK	Mid	50	2	95.00
MIMO	QPSK	Mid	50	2	95.38
SISO	QPSK	Mid	100	2	189.21
SISO-DUAL	QPSK	Mid	100	2	189.32
MIMO	QPSK	Mid	100	2	190.93
SISO-DUAL	16QAM	Mid	50	1	45.69
MIMO	16QAM	Mid	100	1	92.78
SISO-DUAL	16QAM	Mid	50	2	95.20
MIMO	16QAM	Mid	100	2	191.16
SISO-DUAL	64QAM	Mid	50	1	45.89
MIMO	64QAM	Mid	100	1	92.95
SISO-DUAL	64QAM	Mid	50	2	94.97
MIMO	64QAM	Mid	100	2	190.59

n260 ANT M2, Full-RB


Control System	Modulation	Channel	Bandwidth	CCs Active	OBW (MHz)
SISO-DUAL	BPSK	Mid	50	1	46.36
MIMO	BPSK	Mid	100	1	93.63
SISO-DUAL	BPSK	Mid	50	2	95.50
MIMO	BPSK	Mid	100	2	190.63
SISO	QPSK	Mid	50	1	45.95
SISO-DUAL	QPSK	Low	50	1	46.13
SISO-DUAL	QPSK	Mid	50	1	45.95
SISO-DUAL	QPSK	High	50	1	46.05
MIMO	QPSK	Mid	50	1	46.46
SISO	QPSK	Mid	100	1	91.12
SISO-DUAL	QPSK	Low	100	1	91.95
SISO-DUAL	QPSK	Mid	100	1	91.60
SISO-DUAL	QPSK	High	100	1	91.85
MIMO	QPSK	Mid	100	1	92.93
SISO	QPSK	Mid	50	2	95.41
SISO-DUAL	QPSK	Mid	50	2	95.42
MIMO	QPSK	Mid	50	2	95.39
SISO	QPSK	Mid	100	2	190.00
SISO-DUAL	QPSK	Mid	100	2	188.49
MIMO	QPSK	Mid	100	2	191.15
SISO-DUAL	16QAM	Mid	50	1	46.37
MIMO	16QAM	Mid	100	1	93.33
SISO-DUAL	16QAM	Mid	50	2	95.68
MIMO	16QAM	Mid	100	2	191.36
SISO-DUAL	64QAM	Mid	50	1	46.23
MIMO	64QAM	Mid	100	1	93.22
SISO-DUAL	64QAM	Mid	50	2	95.15
MIMO	64QAM	Mid	100	2	191.26

ANT M1


n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 1CC, 50 MHz

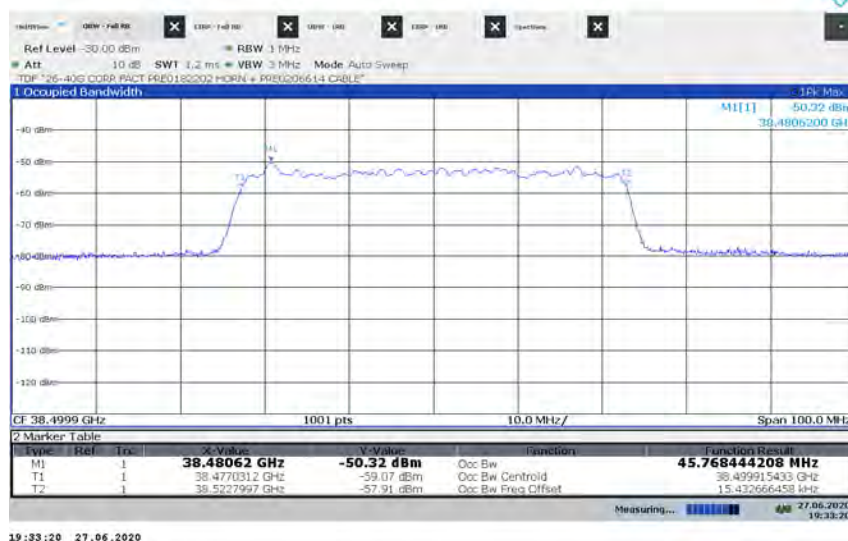

n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 1CC, 100 MHz

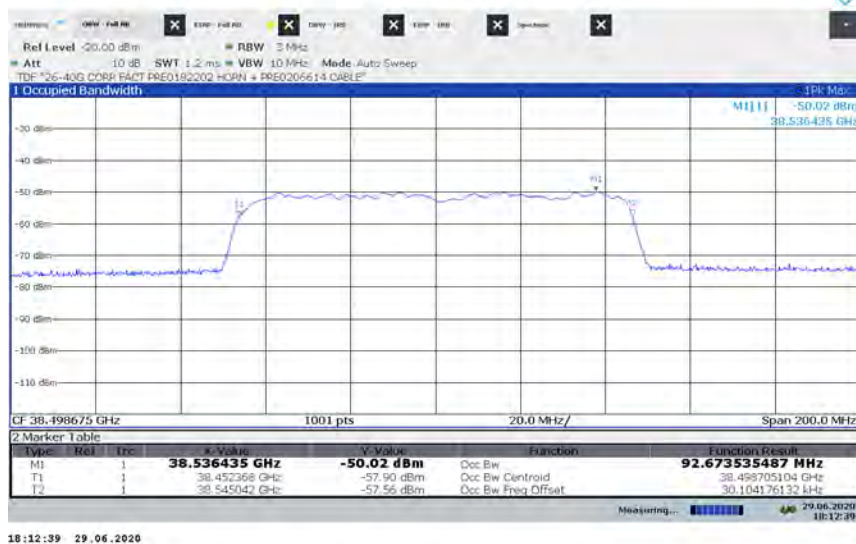

n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 2CC, 50 MHz

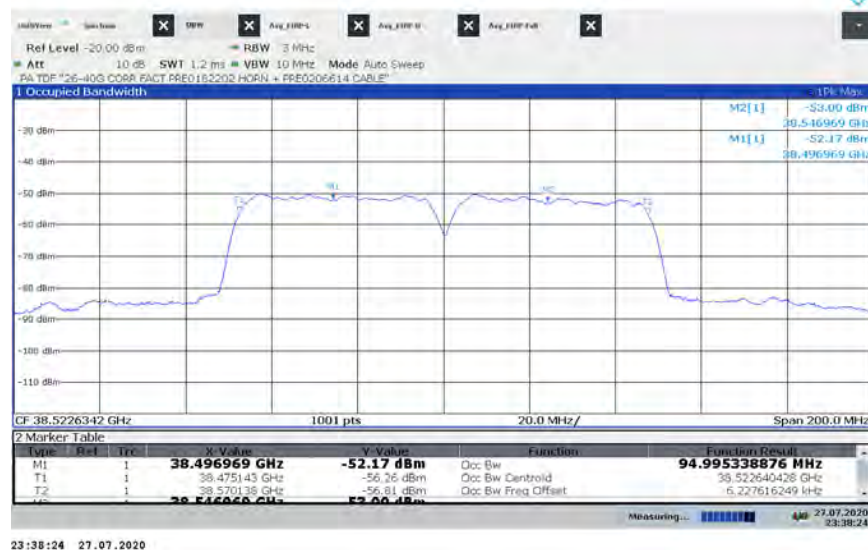


n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 2CC, 100 MHz




ANT M2

n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 1CC, 50 MHz

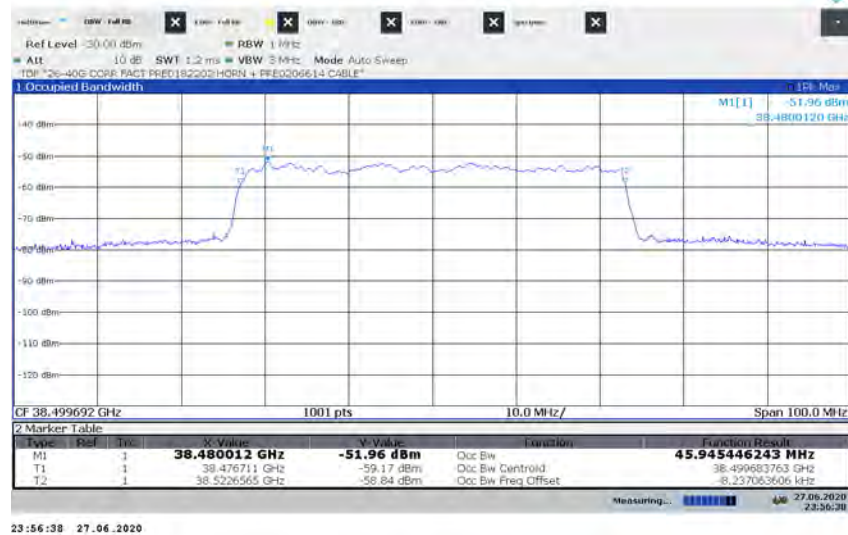

n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 1CC, 100 MHz

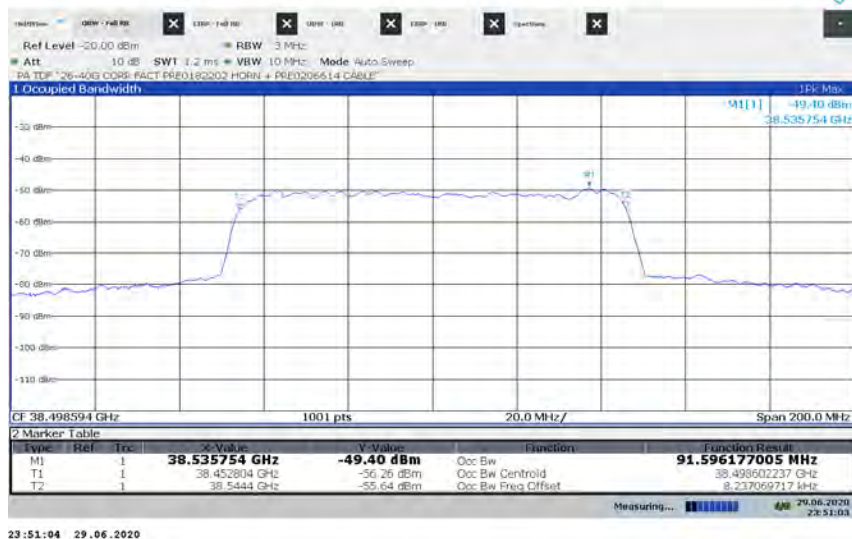

n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 2CC, 50 MHz



n260, QPSK, SISO-Dual, Full-RB, Mid-CH, 2CC, 100 MHz



8.1.2. OCCUPIED BANDWIDTH n261

RESULTS

n261 ANT M1, Full-RB


Control System	Modulation	Channel	Bandwidth	CCs Active	OBW (MHz)
SISO-DUAL	BPSK	Mid	50	1	45.53
MIMO	BPSK	Mid	100	1	93.24
SISO-DUAL	BPSK	Mid	50	2	97.03
MIMO	BPSK	Mid	100	2	189.15
SISO	QPSK	Mid	50	1	45.37
SISO-DUAL	QPSK	Low	50	1	45.53
SISO-DUAL	QPSK	Mid	50	1	45.32
SISO-DUAL	QPSK	High	50	1	45.41
MIMO	QPSK	Mid	50	1	45.33
SISO	QPSK	Mid	100	1	91.45
SISO-DUAL	QPSK	Low	100	1	91.95
SISO-DUAL	QPSK	Mid	100	1	91.30
SISO-DUAL	QPSK	High	100	1	91.40
MIMO	QPSK	Mid	100	1	94.06
SISO	QPSK	Mid	50	2	95.29
SISO-DUAL	QPSK	Mid	50	2	95.56
MIMO	QPSK	Mid	50	2	95.66
SISO	QPSK	Mid	100	2	188.95
SISO-DUAL	QPSK	Mid	100	2	189.54
MIMO	QPSK	Mid	100	2	191.97
SISO-DUAL	16QAM	Mid	50	1	45.46
MIMO	16QAM	Mid	100	1	93.49
SISO-DUAL	16QAM	Mid	50	2	95.35
MIMO	16QAM	Mid	100	2	191.55
SISO-DUAL	64QAM	Mid	50	1	45.44
MIMO	64QAM	Mid	100	1	94.05
SISO-DUAL	64QAM	Mid	50	2	95.50
MIMO	64QAM	Mid	100	2	191.16

n261 ANT M2, Full-RB


Control System	Modulation	Channel	Bandwidth	CCs Active	OBW (MHz)
SISO-DUAL	BPSK	Mid	50	1	45.49
MIMO	BPSK	Mid	100	1	94.59
SISO-DUAL	BPSK	Mid	50	2	97.70
MIMO	BPSK	Mid	100	2	189.01
SISO	QPSK	Mid	50	1	45.57
SISO-DUAL	QPSK	Low	50	1	45.81
SISO-DUAL	QPSK	Mid	50	1	45.72
SISO-DUAL	QPSK	High	50	1	45.63
MIMO	QPSK	Mid	50	1	45.75
SISO	QPSK	Mid	100	1	91.48
SISO-DUAL	QPSK	Low	100	1	92.85
SISO-DUAL	QPSK	Mid	100	1	92.29
SISO-DUAL	QPSK	High	100	1	92.74
MIMO	QPSK	Mid	100	1	94.21
SISO	QPSK	Mid	50	2	95.12
SISO-DUAL	QPSK	Mid	50	2	95.33
MIMO	QPSK	Mid	50	2	95.43
SISO	QPSK	Mid	100	2	189.50
SISO-DUAL	QPSK	Mid	100	2	189.22
MIMO	QPSK	Mid	100	2	190.94
SISO-DUAL	16QAM	Mid	50	1	45.84
MIMO	16QAM	Mid	100	1	94.07
SISO-DUAL	16QAM	Mid	50	2	95.43
MIMO	16QAM	Mid	100	2	190.52
SISO-DUAL	64QAM	Mid	50	1	45.73
MIMO	64QAM	Mid	100	1	94.76
SISO-DUAL	64QAM	Mid	50	2	95.25
MIMO	64QAM	Mid	100	2	190.75


ANT M1

n261, QPSK, SISO-Dual, Full-RB, Mid-CH, 1CC, 50 MHz


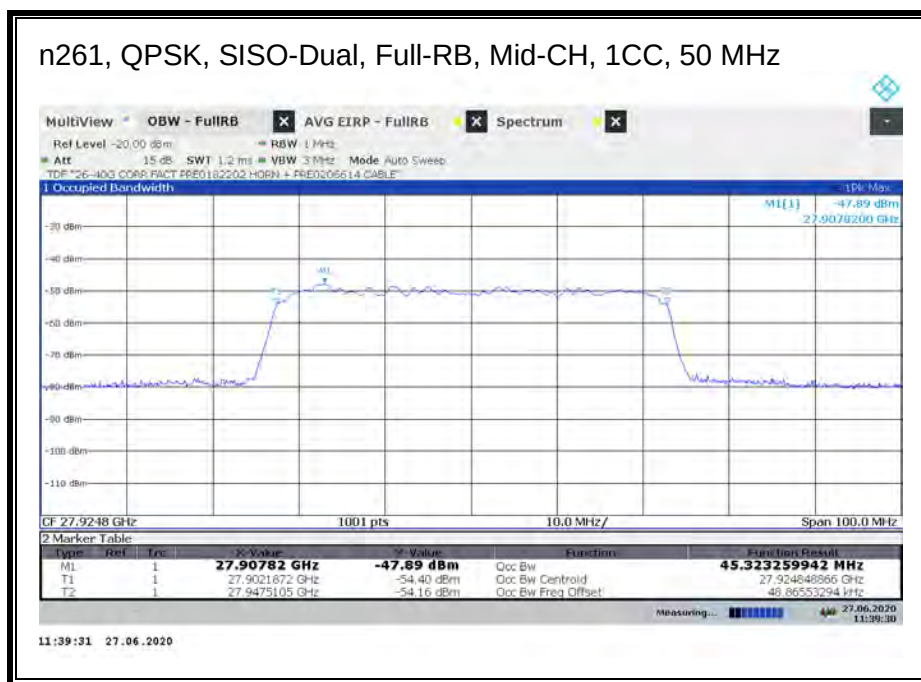


n261, QPSK, SISO-Dual, Full-RB, Mid-CH, 1CC, 100 MHz

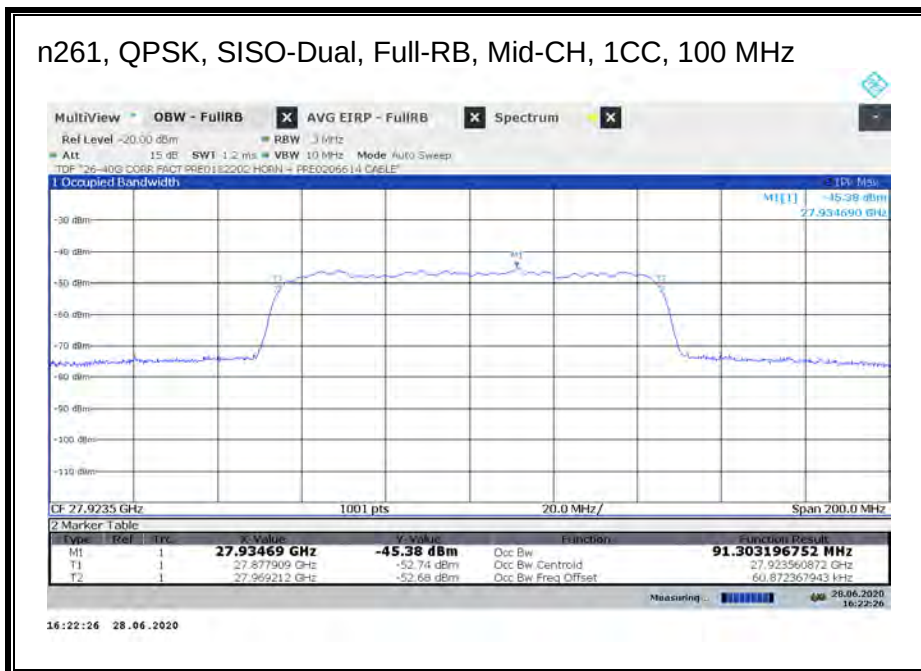

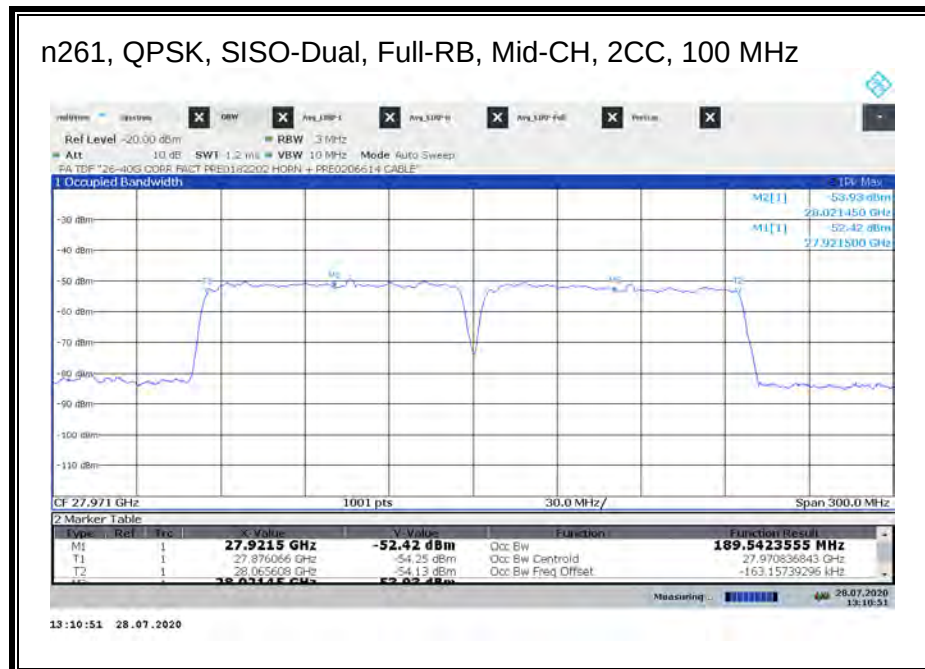

ANT M2

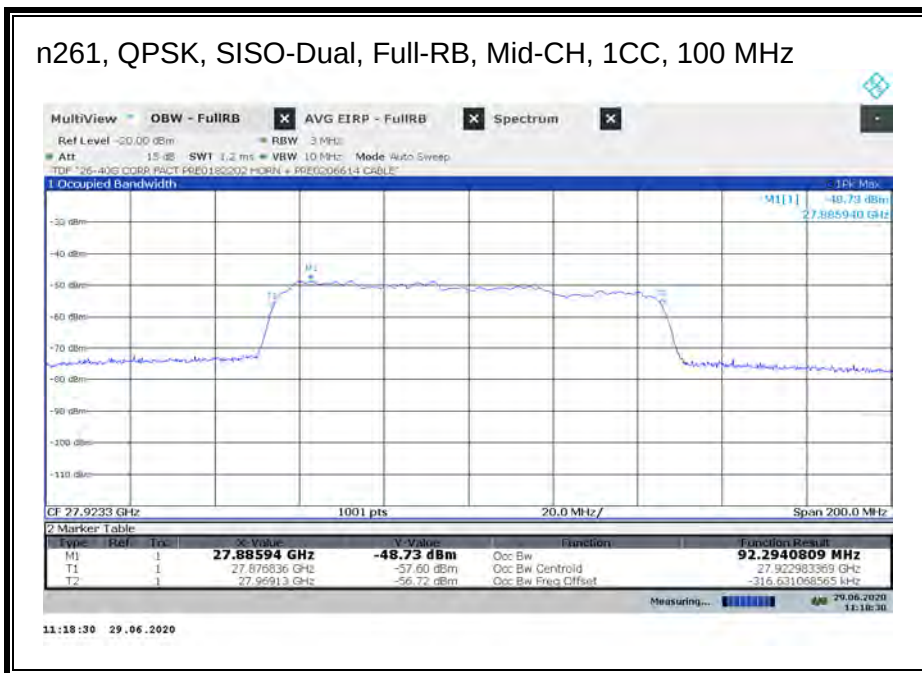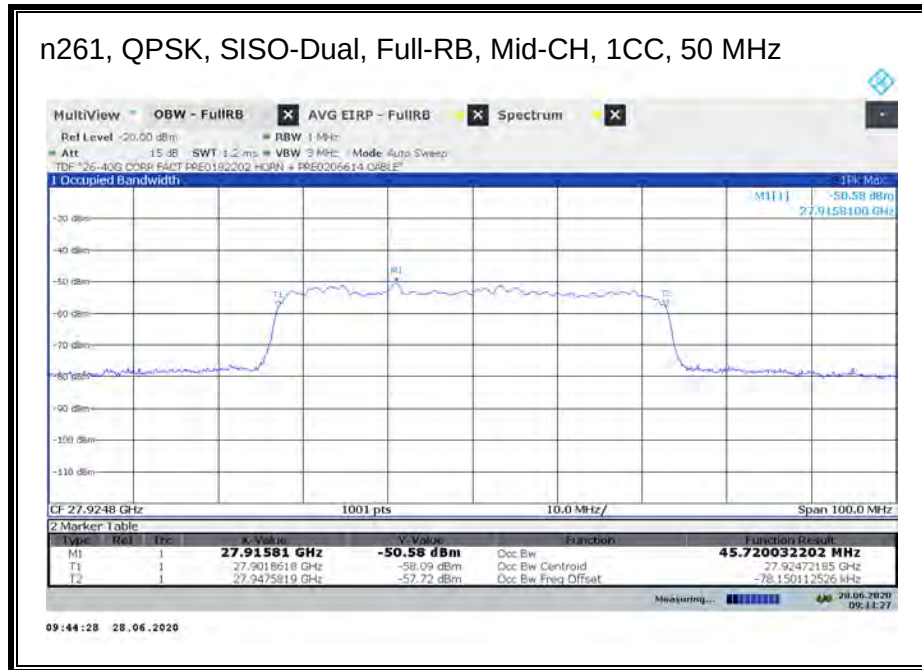

n261, QPSK, SISO-Dual, Full-RB, Mid-CH, 2CC, 50 MHz



n261, QPSK, SISO-Dual, Full-RB, Mid-CH, 2CC, 100 MHz



8.2. EQUIVALENT ISOTROPIC RADIATED POWER

RULE PART(S)

FCC: §2.1046, §30.202

LIMIT

30.202 (b) - For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

TEST PROCEDURES

Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.

- RBW = 1 – 5% of the OBW, not to exceed 1 MHz
- VBW $\geq 3 \times$ RBW
- Span = 2x to 3x the OBW
- Number of measurement points in sweep $> 2 \times$ span / RBW
- Sweep time = auto-couple
- Detector = RMS
- Trace mode = Average over 100 sweeps

KDB 842590 D01 Upper Microwave Flexible Use Service v01 Section 4.2
ANSI C63.26-2015 Clause 5.2, Clause 5.5, Clause 6.4, and Annex C.5.2

EIRP measurements were taken at 3m test distance.

EIRP was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factors from 26.5 – 40.2 GHz range of horn antenna gain and cable loss were calculated using equation C.8 and pre-loaded into spectrum analyzer. Then, EIRP was calculated using equation C.9 with Path Loss @ 3m.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} \\ &= 4 - 23 \\ &= -19 \text{ dB}\end{aligned}$$

$$\begin{aligned}\text{EIRP} &= P_{\text{measured}}(\text{dBm}) + \text{Path Loss @ 3m (dB)} \\ &= -45 + 71 \\ &= 26 \text{ dBm}\end{aligned}$$

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst case polarization/positioning.

For antenna M1 and antenna M2, BPSK, QPSK, 16QAM and 64QAM modulations were all investigated in SISO, SISO-Dual and MIMO configurations. The highest power mode is QPSK for the modulations and SISO-Dual antenna configuration. Full data is provided for those

combinations. To minimize report size the mid channel data is presented for all other combinations. Single RB (highest power) and full RB allocations were measured.

For antenna M0, only QPSK modulation in SISO-Dual configuration is investigated to verify the manufacture's declaration of lower EIRP comparing to antenna M1. Single RB (highest power) and full RB allocations were measured.

RESULTS

See the following pages.

TESTED BY:

Employee IDs: 19296 & 19459, n261 band, Chamber 1
Employee IDs: 19470 & 19437, n260 band, Chamber 2


8.2.1. EIRP RESULTS n260 ANT M1 SISO

Channel	Frequency (GHz)	Bandwidth (MHz)	CCs	Modulation	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
Mid	38.4990	50	1	BPSK	1/15	25.29	43	-17.71
Mid	38.4990	50	1	QPSK	1/15	25.51	43	-17.49
Mid	38.4998	50	1	QPSK	32/0	24.65	43	-18.35
Mid	38.4990	50	1	16QAM	1/15	23.59	43	-19.41
Mid	38.4990	50	1	64QAM	1/15	22.17	43	-20.83
Mid	38.4990	100	1	BPSK	1/32	25.79	43	-17.21
Mid	38.4990	100	1	QPSK	1/32	25.89	43	-17.11
Mid	38.4990	100	1	QPSK	64/0	24.92	43	-18.08
Mid	38.4990	100	1	16QAM	1/32	23.29	43	-19.71
Mid	38.4990	100	1	64QAM	1/32	21.13	43	-21.87
Mid	38.4970	50	2	BPSK	32/0	23.73	43	-19.27
Mid	38.4970	50	2	QPSK	1/15	18.43	43	-24.57
Mid	38.4970	50	2	QPSK	32/0	23.98	43	-19.02
Mid	38.4970	50	2	16QAM	32/0	21.93	43	-21.07
Mid	38.4970	50	2	64QAM	32/0	19.07	43	-23.93
Mid	38.4965	100	2	BPSK	64/0	23.52	43	-19.48
Mid	38.4964	100	2	QPSK	1/32	18.27	43	-24.73
Mid	38.4964	100	2	QPSK	64/0	24.31	43	-18.69
Mid	38.4964	100	2	16QAM	64/0	22.68	43	-20.32
Mid	38.4964	100	2	64QAM	64/0	20.69	43	-22.31


8.2.2. EIRP RESULTS n260 ANT M1 SISO-DUAL

Channel	Frequency (GHz)	Bandwidth (MHz)	CCs	Modulation	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
Mid	38.4990	50	1	BPSK	1/15	27.61	43	-15.39
Low	37.0025	50	1	QPSK	1/0	25.79	43	-17.21
Low	37.0241	50	1	QPSK	1/15	27.79	43	-15.21
Low	37.0471	50	1	QPSK	1/31	25.09	43	-17.91
Low	37.0250	50	1	QPSK	32/0	26.52	43	-16.48
Mid	38.4774	50	1	QPSK	1/0	26.26	43	-16.74
Mid	38.4990	50	1	QPSK	1/15	27.78	43	-15.22
Mid	38.5220	50	1	QPSK	1/31	26.75	43	-16.25
Mid	38.4999	50	1	QPSK	32/0	27.06	43	-15.94
High	39.9524	50	1	QPSK	1/0	26.14	43	-16.86
High	39.9740	50	1	QPSK	1/15	28.73	43	-14.27
High	39.9970	50	1	QPSK	1/31	25.64	43	-17.36
High	39.9747	50	1	QPSK	32/0	27.33	43	-15.67
Mid	38.4990	50	1	16QAM	1/15	26.03	43	-16.97
Mid	38.4990	50	1	64QAM	1/15	23.64	43	-19.36
Mid	38.4990	100	1	BPSK	1/32	27.79	43	-15.21
Low	37.0029	100	1	QPSK	1/0	25.32	43	-17.68
Low	37.0490	100	1	QPSK	1/32	27.29	43	-15.71
Low	37.0951	100	1	QPSK	1/64	25.50	43	-17.50
Low	37.0489	100	1	QPSK	64/0	26.40	43	-16.60
Mid	38.4529	100	1	QPSK	1/0	25.35	43	-17.65
Mid	38.4990	100	1	QPSK	1/32	28.00	43	-15.00
Mid	38.5450	100	1	QPSK	1/64	25.71	43	-17.29
Mid	38.4987	100	1	QPSK	64/0	27.27	43	-15.73
High	39.9028	100	1	QPSK	1/0	26.33	43	-16.67
High	39.9489	100	1	QPSK	1/32	29.56	43	-13.44
High	39.9950	100	1	QPSK	1/64	26.74	43	-16.26
High	39.9484	100	1	QPSK	64/0	28.03	43	-14.97
Mid	38.4990	100	1	16QAM	1/32	25.55	43	-17.45
Mid	38.4990	100	1	64QAM	1/32	24.18	43	-18.82
Mid	38.4970	50	2	BPSK	32/0	25.05	43	-17.95
Mid	38.4754	50	2	QPSK	1/0	21.53	43	-21.47
Mid	38.4970	50	2	QPSK	1/15	21.40	43	-21.60
Mid	38.5200	50	2	QPSK	1/31	19.41	43	-23.59
Mid	38.4970	50	2	QPSK	32/0	26.51	43	-16.49
Mid	38.4970	50	2	16QAM	32/0	24.48	43	-18.52
Mid	38.4970	50	2	64QAM	32/0	22.27	43	-20.73
Mid	38.4964	100	2	BPSK	64/0	25.05	43	-17.95
Mid	38.4504	100	2	QPSK	1/0	20.39	43	-22.61
Mid	38.4964	100	2	QPSK	1/32	21.01	43	-21.99
Mid	38.5425	100	2	QPSK	1/64	19.61	43	-23.39
Mid	38.4964	100	2	QPSK	64/0	26.16	43	-16.84
Mid	38.4965	100	2	16QAM	64/0	24.71	43	-18.29
Mid	38.4964	100	2	64QAM	64/0	22.48	43	-20.52

ANT M1

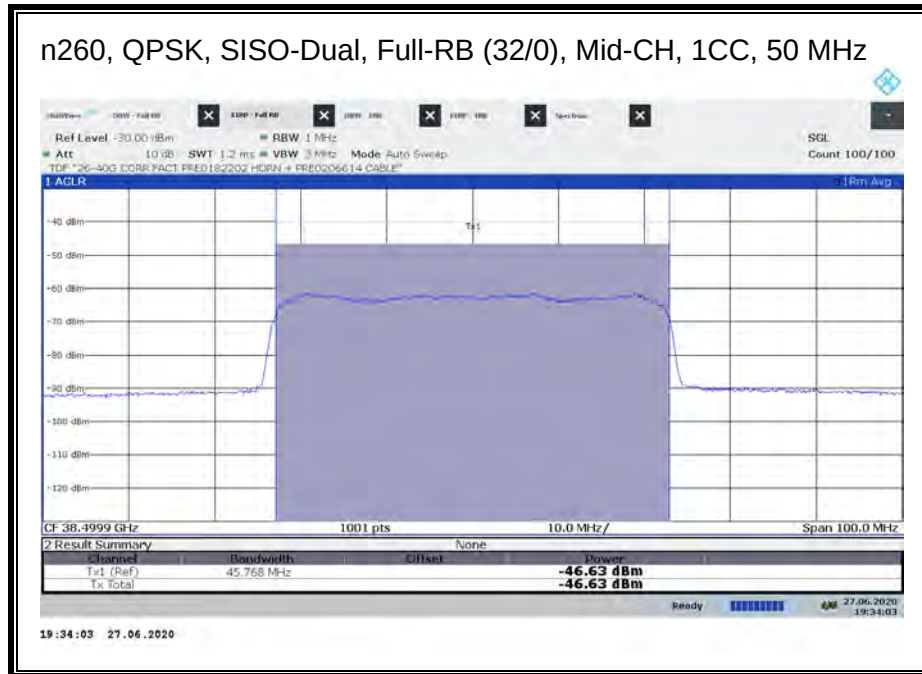

$$\begin{aligned} \text{EIRP (dBm)} &= P_{\text{measured}}(\text{dBm}) + \text{Path Loss @ 3m (dB)} \\ &= -46.63 + 73.69 \\ &= 27.06 \end{aligned}$$

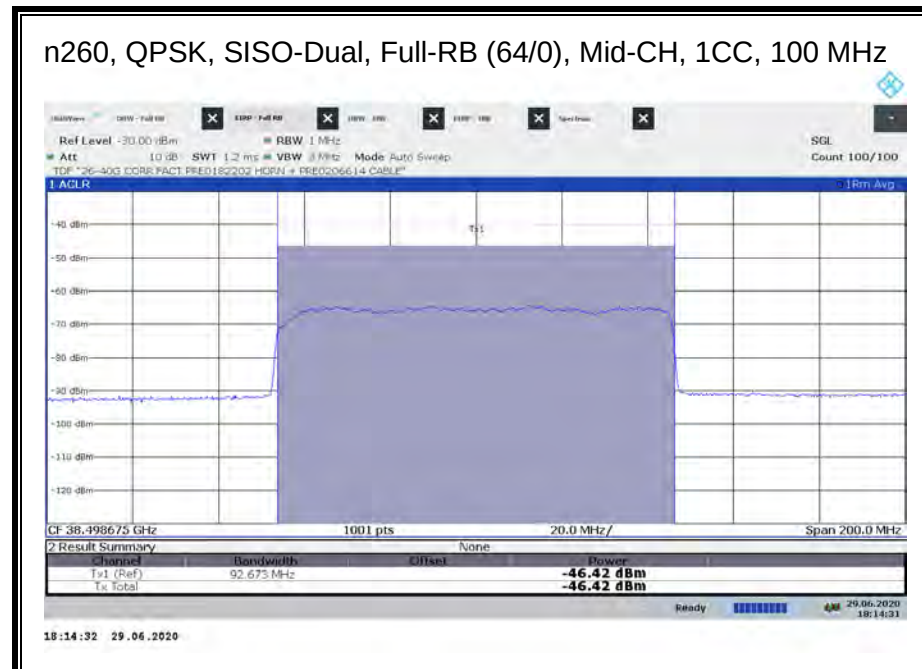

$$\begin{aligned} \text{EIRP (dBm)} &= P_{\text{measured}}(\text{dBm}) + \text{Path Loss @ 3m (dB)} \\ &= -46.42 + 73.69 \\ &= 27.27 \end{aligned}$$

8.2.3. EIRP RESULTS n260 ANT M1 MIMO

Channel	Frequency	Bandwidth	CCs	Modulation	RB	Avg EIRP	Limit	Margin
	(GHz)	(MHz)			(Size/Offset)	(dBm)	(dBm)	(dB)
Mid	38.4990	50	1	BPSK	1/15	18.58	43	-24.42
Mid	38.4990	50	1	QPSK	1/15	22.81	43	-20.19
Mid	38.4997	50	1	QPSK	32/0	22.03	43	-20.97
Mid	38.4990	50	1	16QAM	1/15	20.12	43	-22.88
Mid	38.4990	50	1	64QAM	1/15	18.48	43	-24.52
Mid	38.5004	100	1	BPSK	1/33	19.90	43	-23.10
Mid	38.5004	100	1	QPSK	1/33	24.14	43	-18.86
Mid	38.4997	100	1	QPSK	66/0	23.00	43	-20.00
Mid	38.5004	100	1	16QAM	1/33	21.31	43	-21.69
Mid	38.5004	100	1	64QAM	1/33	19.74	43	-23.26
Mid	38.4970	50	2	BPSK	32/0	16.10	43	-26.90
Mid	38.4970	50	2	QPSK	1/15	18.85	43	-24.15
Mid	38.4970	50	2	QPSK	32/0	21.98	43	-21.02
Mid	38.4970	50	2	16QAM	32/0	19.66	43	-23.34
Mid	38.4970	50	2	64QAM	32/0	17.25	43	-25.75
Mid	38.4979	100	2	BPSK	66/0	17.48	43	-25.52
Mid	38.4979	100	2	QPSK	1/33	18.10	43	-24.90
Mid	38.4979	100	2	QPSK	66/0	21.88	43	-21.12
Mid	38.4979	100	2	16QAM	66/0	20.09	43	-22.91
Mid	38.4979	100	2	64QAM	66/0	16.88	43	-26.12

8.2.4. EIRP RESULTS n260 ANT M0 SISO-DUAL

Channel	Frequency	Bandwidth	CCs	Modulation	RB	Avg EIRP	Limit	Margin
	(GHz)	(MHz)			(Size/Offset)	(dBm)	(dBm)	(dB)
Mid	38.4990	50	1	QPSK	1/15	11.59	43	-31.41
Mid	38.4997	50	1	QPSK	32/0	11.33	43	-31.67
Mid	38.4991	100	1	QPSK	1/32	11.52	43	-31.48
Mid	38.4984	100	1	QPSK	64/0	10.93	43	-32.07

8.2.5. EIRP RESULTS n260 ANT M2 SISO

Channel	Frequency	Bandwidth	CCs	Modulation	RB	Avg EIRP	Limit	Margin
	(GHz)	(MHz)			(Size/Offset)	(dBm)	(dBm)	(dB)
Mid	38.4990	50	1	BPSK	1/15	23.96	43	-19.04
Mid	38.4998	50	1	QPSK	1/15	26.50	43	-16.50
Mid	38.4997	50	1	QPSK	32/0	25.65	43	-17.35
Mid	38.4990	50	1	16QAM	1/15	24.49	43	-18.51
Mid	38.4990	50	1	64QAM	1/15	22.72	43	-20.28
Mid	38.4990	100	1	BPSK	1/32	25.01	43	-17.99
Mid	38.4990	100	1	QPSK	1/32	26.59	43	-16.41
Mid	38.4986	100	1	QPSK	64/0	25.63	43	-17.37
Mid	38.4990	100	1	16QAM	1/32	24.73	43	-18.27
Mid	38.4990	100	1	64QAM	1/32	22.99	43	-20.01
Mid	38.4970	50	2	BPSK	32/0	21.40	43	-21.60
Mid	38.4970	50	2	QPSK	1/15	16.88	43	-26.12
Mid	38.4970	50	2	QPSK	32/0	21.40	43	-21.60
Mid	38.4970	50	2	16QAM	32/0	19.97	43	-23.03
Mid	38.4970	50	2	64QAM	32/0	16.49	43	-26.51
Mid	38.4965	100	2	BPSK	64/0	21.52	43	-21.48
Mid	38.4964	100	2	QPSK	1/32	17.81	43	-25.19
Mid	38.4964	100	2	QPSK	64/0	22.90	43	-20.10
Mid	38.4964	100	2	16QAM	64/0	21.15	43	-21.85
Mid	38.4964	100	2	64QAM	64/0	18.78	43	-24.22

8.2.6. EIRP RESULTS n260 ANT M2 SISO-DUAL

Channel	Frequency	Bandwidth	CCs	Modulation	RB	Avg EIRP	Limit	Margin
	(GHz)	(MHz)			(Size/Offset)	(dBm)	(dBm)	(dB)
Mid	38.4990	50	1	BPSK	1/15	26.61	43	-16.39
Low	37.0024	50	1	QPSK	1/0	23.58	43	-19.42
Low	37.0241	50	1	QPSK	1/15	25.80	43	-17.20
Low	37.0471	50	1	QPSK	1/31	22.99	43	-20.01
Low	37.0248	50	1	QPSK	32/0	24.57	43	-18.43
Mid	38.4774	50	1	QPSK	1/0	25.87	43	-17.13
Mid	38.4990	50	1	QPSK	1/15	27.87	43	-15.13
Mid	38.5220	50	1	QPSK	1/31	25.91	43	-17.09
Mid	38.4997	50	1	QPSK	32/0	26.96	43	-16.04
High	39.9524	50	1	QPSK	1/0	24.43	43	-18.57
High	39.9740	50	1	QPSK	1/15	25.49	43	-17.51
High	39.9970	50	1	QPSK	1/31	23.58	43	-19.42
High	39.9746	50	1	QPSK	32/0	25.06	43	-17.94
Mid	38.4990	50	1	16QAM	1/15	25.14	43	-17.86
Mid	38.4990	50	1	64QAM	1/15	23.63	43	-19.37
Mid	38.4990	100	1	BPSK	1/32	26.91	43	-16.09
Low	37.0029	100	1	QPSK	1/0	22.92	43	-20.08
Low	37.0490	100	1	QPSK	1/32	25.53	43	-17.47
Low	37.0951	100	1	QPSK	1/64	23.18	43	-19.82
Low	37.0488	100	1	QPSK	64/0	24.21	43	-18.79
Mid	38.4529	100	1	QPSK	1/0	24.64	43	-18.36
Mid	38.4990	100	1	QPSK	1/32	27.62	43	-15.38
Mid	38.5450	100	1	QPSK	1/64	25.70	43	-17.30
Mid	38.4986	100	1	QPSK	64/0	26.61	43	-16.39
High	39.9028	100	1	QPSK	1/0	23.97	43	-19.03
High	39.9489	100	1	QPSK	1/32	26.58	43	-16.42
High	39.9950	100	1	QPSK	1/64	24.09	43	-18.91
High	39.9484	100	1	QPSK	64/0	25.18	43	-17.82
Mid	38.4990	100	1	16QAM	1/32	24.84	43	-18.16
Mid	38.4989	100	1	64QAM	1/32	23.19	43	-19.81
Mid	38.4970	50	2	BPSK	32/0	23.97	43	-19.03
Mid	38.4754	50	2	QPSK	1/0	20.80	43	-22.20
Mid	38.4970	50	2	QPSK	1/15	20.88	43	-22.12
Mid	38.5200	50	2	QPSK	1/31	19.45	43	-23.55
Mid	38.4970	50	2	QPSK	32/0	25.57	43	-17.43
Mid	38.4970	50	2	16QAM	32/0	23.55	43	-19.45
Mid	38.4970	50	2	64QAM	32/0	21.55	43	-21.45
Mid	38.4964	100	2	BPSK	64/0	23.70	43	-19.30
Mid	38.4504	100	2	QPSK	1/0	19.82	43	-23.18
Mid	38.4964	100	2	QPSK	1/32	20.74	43	-22.26
Mid	38.5425	100	2	QPSK	1/64	19.35	43	-23.65
Mid	38.4964	100	2	QPSK	64/0	25.43	43	-17.57
Mid	38.4964	100	2	16QAM	64/0	24.34	43	-18.66
Mid	38.4964	100	2	64QAM	64/0	22.31	43	-20.69

8.2.7. EIRP RESULTS n260 ANT M2 MIMO

Channel	Frequency	Bandwidth	CCs	Modulation	RB	Avg EIRP	Limit	Margin
	(GHz)	(MHz)			(Size/Offset)	(dBm)	(dBm)	(dB)
Mid	38.4990	50	1	BPSK	1/15	18.95	43	-24.05
Mid	38.4990	50	1	QPSK	1/15	22.86	43	-20.14
Mid	38.4997	50	1	QPSK	32/0	22.92	43	-20.08
Mid	38.4989	50	1	16QAM	1/15	20.70	43	-22.30
Mid	38.5004	100	1	BPSK	1/33	18.48	43	-24.52
Mid	38.5004	100	1	QPSK	1/33	22.23	43	-20.77
Mid	38.4997	100	1	QPSK	66/0	21.54	43	-21.46
Mid	38.5004	100	1	16QAM	1/33	22.23	43	-20.77
Mid	38.5004	100	1	64QAM	1/33	19.69	43	-23.31
Mid	38.4970	50	2	BPSK	32/0	17.12	43	-25.88
Mid	38.4970	50	2	QPSK	1/15	19.60	43	-23.40
Mid	38.4970	50	2	QPSK	32/0	22.23	43	-20.77
Mid	38.4970	50	2	16QAM	32/0	20.44	43	-22.56
Mid	38.4970	50	2	64QAM	32/0	18.16	43	-24.84
Mid	38.4979	100	2	BPSK	66/0	17.03	43	-25.97
Mid	38.4979	100	2	QPSK	1/33	18.83	43	-24.17
Mid	38.4979	100	2	QPSK	66/0	22.32	43	-20.68
Mid	38.4979	100	2	16QAM	66/0	20.76	43	-22.24
Mid	38.4979	100	2	64QAM	66/0	15.27	43	-27.73


8.2.8. EIRP RESULTS n261 ANT M1 SISO

Channel	Frequency	Bandwidth	CCs	Modulation	RB	Avg EIRP	Limit	Margin
	(GHz)	(MHz)			(Size/Offset)	(dBm)	(dBm)	(dB)
Mid	27.9240	50	1	BPSK	1/15	26.21	43	-16.79
Mid	27.9240	50	1	QPSK	1/15	26.31	43	-16.69
Mid	27.9248	50	1	QPSK	32/0	25.62	43	-17.38
Mid	27.9240	50	1	16QAM	1/15	25.04	43	-17.96
Mid	27.9240	50	1	64QAM	1/15	22.77	43	-20.23
Mid	27.9240	100	1	BPSK	1/32	26.6	43	-16.40
Mid	27.9240	100	1	QPSK	1/32	26.61	43	-16.39
Mid	27.9235	100	1	QPSK	64/0	25.60	43	-17.40
Mid	27.9240	100	1	16QAM	1/32	23.98	43	-19.02
Mid	27.9240	100	1	64QAM	1/32	22.71	43	-20.29
Mid	27.9225	50	2	BPSK	32/0	23.68	43	-19.32
Mid	27.9220	50	2	QPSK	1/15	18.53	43	-24.47
Mid	27.9225	50	2	QPSK	32/0	24.78	43	-18.22
Mid	27.9225	50	2	16QAM	32/0	22.27	43	-20.73
Mid	27.9225	50	2	64QAM	32/0	20.19	43	-22.81
Mid	27.9215	100	2	BPSK	64/0	23.87	43	-19.13
Mid	27.9215	100	2	QPSK	1/32	17.76	43	-25.24
Mid	27.9215	100	2	QPSK	64/0	24.85	43	-18.15
Mid	27.9215	100	2	16QAM	64/0	22.63	43	-20.37
Mid	27.9215	100	2	64QAM	64/0	20.33	43	-22.67


8.2.9. EIRP RESULTS n261 ANT M1 SISO-DUAL

Channel	Frequency (GHz)	Bandwidth (MHz)	CCs	Modulation	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
Mid	27.9241	50	1	BPSK	1/15	29.65	43	-13.35
Low	27.5025	50	1	QPSK	1/0	26.61	43	-16.39
Low	27.5241	50	1	QPSK	1/15	29.00	43	-14.00
Low	27.5471	50	1	QPSK	1/31	26.58	43	-16.42
Low	27.5248	50	1	QPSK	32/0	27.18	43	-15.82
Mid	27.9024	50	1	QPSK	1/0	26.73	43	-16.27
Mid	27.9240	50	1	QPSK	1/15	29.72	43	-13.28
Mid	27.9470	50	1	QPSK	1/31	26.45	43	-16.55
Mid	27.9248	50	1	QPSK	32/0	27.82	43	-15.18
High	28.3024	50	1	QPSK	1/0	27.44	43	-15.56
High	28.3240	50	1	QPSK	1/15	29.42	43	-13.58
High	28.3470	50	1	QPSK	1/31	26.95	43	-16.05
High	28.3247	50	1	QPSK	32/0	28.48	43	-14.52
Mid	27.9241	50	1	16QAM	1/15	27.14	43	-15.86
Mid	27.9240	50	1	64QAM	1/15	24.00	43	-19.00
Mid	27.9240	100	1	BPSK	1/32	29.64	43	-13.36
Low	27.5031	100	1	QPSK	1/0	27.53	43	-15.47
Low	27.5492	100	1	QPSK	1/32	29.77	43	-13.23
Low	27.5952	100	1	QPSK	1/64	27.54	43	-15.46
Low	27.5486	100	1	QPSK	64/0	28.46	43	-14.54
Mid	27.8780	100	1	QPSK	1/0	28.21	43	-14.79
Mid	27.9240	100	1	QPSK	1/32	29.81	43	-13.19
Mid	27.9701	100	1	QPSK	1/64	27.27	43	-15.73
Mid	27.9235	100	1	QPSK	64/0	28.51	43	-14.49
High	28.2530	100	1	QPSK	1/0	28.20	43	-14.80
High	28.2990	100	1	QPSK	1/32	30.28	43	-12.72
High	28.3451	100	1	QPSK	1/64	27.97	43	-15.03
High	28.2986	100	1	QPSK	64/0	28.79	43	-14.21
Mid	27.9240	100	1	16QAM	1/32	28.02	43	-14.98
Mid	27.9240	100	1	64QAM	1/32	25.28	43	-17.72
Mid	27.9221	50	2	BPSK	32/0	26.22	43	-16.78
Mid	27.9004	50	2	QPSK	1/0	22.27	43	-20.73
Mid	27.9220	50	2	QPSK	1/15	22.30	43	-20.70
Mid	27.9451	50	2	QPSK	1/31	21.37	43	-21.63
Mid	27.9220	50	2	QPSK	32/0	27.41	43	-15.59
Mid	27.9220	50	2	16QAM	32/0	25.58	43	-17.42
Mid	27.9220	50	2	64QAM	32/0	23.38	43	-19.62
Mid	27.9215	100	2	BPSK	64/0	25.56	43	-17.44
Mid	27.8754	100	2	QPSK	1/0	21.57	43	-21.43
Mid	27.9215	100	2	QPSK	1/32	21.88	43	-21.12
Mid	27.9676	100	2	QPSK	1/64	21.88	43	-21.12
Mid	27.9215	100	2	QPSK	64/0	26.92	43	-16.08
Mid	27.9215	100	2	16QAM	64/0	24.80	43	-18.20
Mid	27.9215	100	2	64QAM	64/0	22.81	43	-20.19

ANT M1

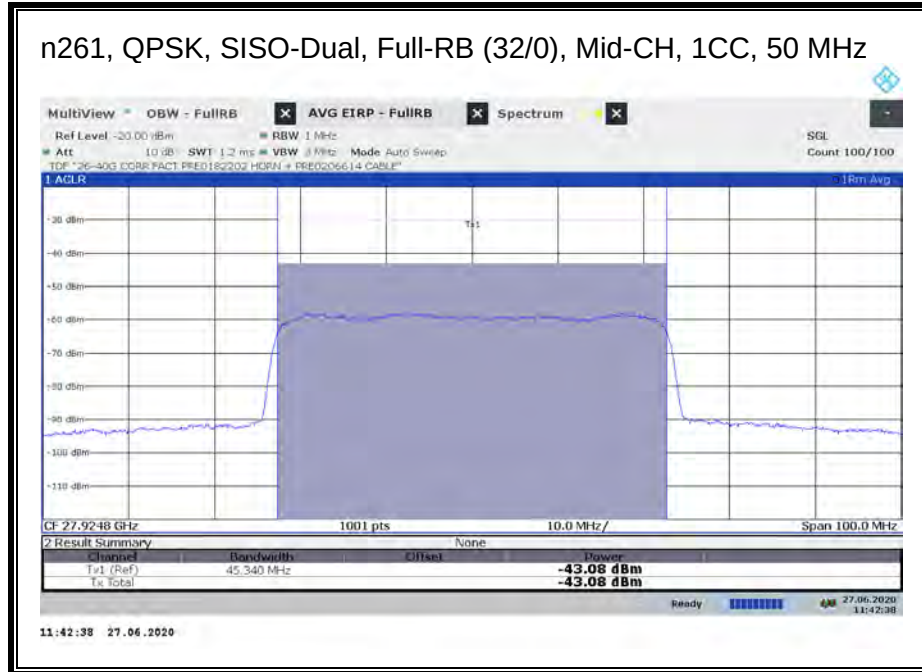

$$\begin{aligned} \text{EIRP (dBm)} &= P_{\text{measured}}(\text{dBm}) + \text{Path Loss @ 3m (dB)} \\ &= -43.08 + 70.90 \\ &= 27.82 \end{aligned}$$

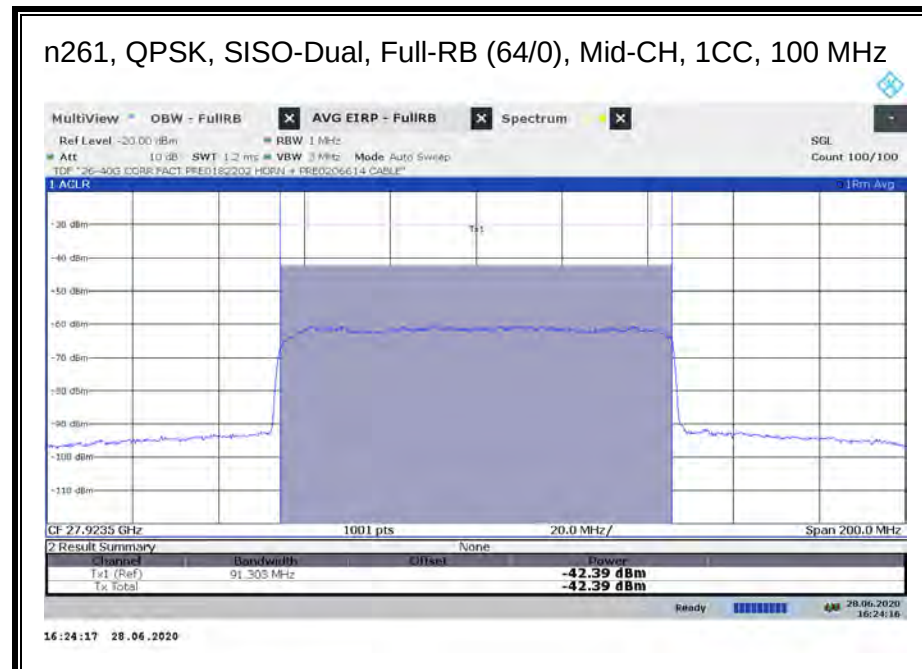

$$\begin{aligned} \text{EIRP (dBm)} &= P_{\text{measured}}(\text{dBm}) + \text{Path Loss @ 3m (dB)} \\ &= -42.39 + 70.90 \\ &= 28.51 \end{aligned}$$

8.2.10. EIRP RESULTS n261 ANT M1 MIMO

Channel	Frequency (GHz)	Bandwidth (MHz)	CCs	Modulation	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
Mid	27.9240	50	1	BPSK	1/15	22.84	43	-20.16
Mid	27.9240	50	1	QPSK	1/15	23.68	43	-19.32
Mid	27.9248	50	1	QPSK	32/0	23.05	43	-19.95
Mid	27.9240	50	1	16QAM	1/15	22.47	43	-20.53
Mid	27.9240	50	1	64QAM	1/15	19.59	43	-23.41
Mid	27.9255	100	1	BPSK	1/33	22.32	43	-20.68
Mid	27.9255	100	1	QPSK	1/33	24.23	43	-18.77
Mid	27.9247	100	1	QPSK	66/0	23.26	43	-19.74
Mid	27.9255	100	1	16QAM	1/33	21.77	43	-21.23
Mid	27.9255	100	1	64QAM	1/33	20.11	43	-22.89
Mid	27.9220	50	2	BPSK	32/0	20.88	43	-22.12
Mid	27.9220	50	2	QPSK	1/15	20.03	43	-22.97
Mid	27.9220	50	2	QPSK	32/0	22.66	43	-20.34
Mid	27.9220	50	2	16QAM	32/0	19.71	43	-23.29
Mid	27.9220	50	2	64QAM	32/0	16.81	43	-26.19
Mid	27.9229	100	2	BPSK	66/0	20.27	43	-22.73
Mid	27.9229	100	2	QPSK	1/33	17.86	43	-25.14
Mid	27.9229	100	2	QPSK	66/0	21.22	43	-21.78
Mid	27.9229	100	2	16QAM	66/0	19.79	43	-23.21
Mid	27.9229	100	2	64QAM	66/0	17.05	43	-25.95

8.2.11. EIRP RESULTS n261 ANT M0 SISO-DUAL

Channel	Frequency	Bandwidth	CCs	Modulation	RB	Avg EIRP	Limit	Margin
	(GHz)	(MHz)			(Size/Offset)	(dBm)	(dBm)	(dB)
Mid	27.9240	50	1	QPSK	1/15	14.74	43	-28.26
Mid	27.9248	50	1	QPSK	32/0	13.69	43	-29.31
Mid	27.9240	100	1	QPSK	1/32	14.30	43	-28.70
Mid	27.9233	100	1	QPSK	64/0	13.14	43	-29.86

8.2.12. EIRP RESULTS n261 ANT M2 SISO

Channel	Frequency (GHz)	Bandwidth (MHz)	CCs	Modulation	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
Mid	27.9240	50	1	BPSK	1/15	24.56	43	-18.44
Mid	27.9240	50	1	QPSK	1/15	25.02	43	-17.98
Mid	27.9248	50	1	QPSK	32/0	23.44	43	-19.56
Mid	27.9240	50	1	16QAM	1/15	22.45	43	-20.55
Mid	27.9240	50	1	64QAM	1/15	20.06	43	-22.94
Mid	27.9240	100	1	BPSK	1/32	24.65	43	-18.35
Mid	27.9240	100	1	QPSK	1/32	25.3	43	-17.70
Mid	27.9235	100	1	QPSK	64/0	23.68	43	-19.32
Mid	27.9240	100	1	16QAM	1/32	22.44	43	-20.56
Mid	27.9240	100	1	64QAM	1/32	20.06	43	-22.94
Mid	27.9221	50	2	BPSK	32/0	22.34	43	-20.66
Mid	27.9220	50	2	QPSK	1/15	15.21	43	-27.79
Mid	27.9220	50	2	QPSK	32/0	22.82	43	-20.18
Mid	27.9220	50	2	16QAM	32/0	19.78	43	-23.22
Mid	27.9220	50	2	64QAM	32/0	17.87	43	-25.13
Mid	27.9215	100	2	BPSK	64/0	21.91	43	-21.09
Mid	27.9215	100	2	QPSK	1/32	14.17	43	-28.83
Mid	27.9215	100	2	QPSK	64/0	22.71	43	-20.29
Mid	27.9215	100	2	16QAM	64/0	19.75	43	-23.25
Mid	27.9215	100	2	64QAM	64/0	17.42	43	-25.58

8.2.13. EIRP RESULTS n261 ANT M2 SISO-DUAL

Channel	Frequency (GHz)	Bandwidth (MHz)	CCs	Modulation	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
Mid	27.9240	50	1	BPSK	1/15	26.19	43	-16.81
Low	27.5025	50	1	QPSK	1/0	24.44	43	-18.56
Low	27.5241	50	1	QPSK	1/15	25.82	43	-17.18
Low	27.5471	50	1	QPSK	1/31	23.09	43	-19.91
Low	27.5248	50	1	QPSK	32/0	25.16	43	-17.84
Mid	27.9024	50	1	QPSK	1/0	23.29	43	-19.71
Mid	27.9240	50	1	QPSK	1/15	27.36	43	-15.64
Mid	27.9470	50	1	QPSK	1/31	23.11	43	-19.89
Mid	27.9248	50	1	QPSK	32/0	24.54	43	-18.46
High	28.3024	50	1	QPSK	1/0	23.38	43	-19.62
High	28.3240	50	1	QPSK	1/15	25.85	43	-17.15
High	28.3470	50	1	QPSK	1/31	22.96	43	-20.04
High	28.3247	50	1	QPSK	32/0	24.22	43	-18.78
Mid	27.9240	50	1	16QAM	1/15	23.72	43	-19.28
Mid	27.9240	50	1	64QAM	1/15	21.59	43	-21.41
Mid	27.9240	100	1	BPSK	1/32	26.36	43	-16.64
Low	27.5031	100	1	QPSK	1/0	24.53	43	-18.47
Low	27.5492	100	1	QPSK	1/32	25.28	43	-17.72
Low	27.5952	100	1	QPSK	1/64	24.10	43	-18.90
Low	27.5485	100	1	QPSK	64/0	24.97	43	-18.03
Mid	27.8780	100	1	QPSK	1/0	24.49	43	-18.51
Mid	27.9240	100	1	QPSK	1/32	26.85	43	-16.15
Mid	27.9701	100	1	QPSK	1/64	23.38	43	-19.62
Mid	27.9233	100	1	QPSK	64/0	24.61	43	-18.39
High	28.2530	100	1	QPSK	1/0	24.15	43	-18.85
High	28.2990	100	1	QPSK	1/32	25.53	43	-17.47
High	28.3451	100	1	QPSK	1/64	22.72	43	-20.28
High	28.2986	100	1	QPSK	64/0	24.65	43	-18.35
Mid	27.9241	100	1	16QAM	1/32	23.65	43	-19.35
Mid	27.9240	100	1	64QAM	1/32	21.30	43	-21.70
Mid	27.9221	50	2	BPSK	32/0	24.71	43	-18.29
Mid	27.9004	50	2	QPSK	1/0	17.80	43	-25.20
Mid	27.9220	50	2	QPSK	1/15	18.20	43	-24.80
Mid	27.9451	50	2	QPSK	1/31	17.84	43	-25.16
Mid	27.9220	50	2	QPSK	32/0	25.32	43	-17.68
Mid	27.9220	50	2	16QAM	32/0	21.02	43	-21.98
Mid	27.9220	50	2	64QAM	32/0	19.03	43	-23.97
Mid	27.9215	100	2	BPSK	64/0	24.6	43	-18.40
Mid	27.8754	100	2	QPSK	1/0	17.77	43	-25.23
Mid	27.9215	100	2	QPSK	1/32	18.50	43	-24.50
Mid	27.9676	100	2	QPSK	1/64	17.77	43	-25.23
Mid	27.9215	100	2	QPSK	64/0	25.23	43	-17.77
Mid	27.9215	100	2	16QAM	64/0	21.34	43	-21.66
Mid	27.9215	100	2	64QAM	64/0	19.24	43	-23.76

8.2.14. EIRP RESULTS n261 ANT M2 MIMO

Channel	Frequency (GHz)	Bandwidth (MHz)	CCs	Modulation	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
Mid	27.9240	50	1	BPSK	1/15	19.98	43	-23.02
Mid	27.9240	50	1	QPSK	1/15	23.68	43	-19.32
Mid	27.9248	50	1	QPSK	32/0	23.05	43	-19.95
Mid	27.9240	50	1	16QAM	1/15	20.91	43	-22.09
Mid	27.9240	50	1	64QAM	1/15	19.40	43	-23.60
Mid	27.9255	100	1	BPSK	1/33	20.26	43	-22.74
Mid	27.9255	100	1	QPSK	1/33	22.45	43	-20.55
Mid	27.9247	100	1	QPSK	66/0	22.27	43	-20.73
Mid	27.9255	100	1	16QAM	1/33	21.77	43	-21.23
Mid	27.9255	100	1	64QAM	1/33	20.11	43	-22.89
Mid	27.9221	50	2	BPSK	32/0	19.20	43	-23.80
Mid	27.9220	50	2	QPSK	1/15	18.48	43	-24.52
Mid	27.9220	50	2	QPSK	32/0	20.43	43	-22.57
Mid	27.9220	50	2	16QAM	32/0	18.88	43	-24.12
Mid	27.9220	50	2	64QAM	32/0	16.13	43	-26.87
Mid	27.9229	100	2	BPSK	66/0	18.94	43	-24.06
Mid	27.9229	100	2	QPSK	1/33	18.25	43	-24.75
Mid	27.9229	100	2	QPSK	66/0	21.22	43	-21.78
Mid	27.9229	100	2	16QAM	66/0	19.52	43	-23.48
Mid	27.9229	100	2	64QAM	66/0	16.76	43	-26.24

8.3. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §2.1051, §30.203

LIMITS

30.203 (a) - The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

TEST PROCEDURE

- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of measurement points in sweep $> 2 \times$ span / RBW
- Sweep time = auto-couple
- Detector = RMS
- Trace mode = Average

KDB 842590 D01 Upper Microwave Flexible Use Service v01 Section 4.2
ANSI C63.26-2015 Clause 5.2, Clause 5.5, Clause 6.4, and Annex C.5.2

Band Edge measurements were measured as EIRP for direct comparison to the 30.203 TRP limit to demonstrate compliance.

The appropriate far field test distance at 3m, listed on Section 5, was used at test.

EIRP was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factors from 26.5 – 40.2 GHz range of horn antenna gain, cable loss and far-field path loss @ 3m were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} + \text{Path Loss @ 3m (dB)} \\ &= 4 - 23 + 71 \\ &= 52 \text{ dB}\end{aligned}$$

$$\text{EIRP} = P_{\text{measured}}(\text{dBm}), \text{ where Total Correction Factor preloaded.}$$

In order to properly display of signal level on the plots, the pre-loaded correction factors were intentional lowered by 40 dB and an offset factor of 40 dB was applied on spectrum analyzer to compensate the true correction factors across 26.5 to 40.2 GHz range.

BPSK, QPSK, 16QAM and 64QAM modulations were all investigated in SISO, SISO-Dual and MIMO configurations. The highest band edge emissions were for the SISO-Dual antenna

configuration consistent with this also being the configuration with the highest EIRP. The SISO-Dual configuration was, therefore, used for the final band-edge measurements. Additional measurements were made on the MIMO configuration as it has a wider bandwidth than the SISO-DUAL configuration. To reduce report file size, the plots are provided only for the worst case (QPSK) modulation. The tabular data includes data for the BPSK, 16QAM and 64QAM modulations. Single RB (highest power) and Full RB allocations were measured.

Band edge measurements for multi-carrier (2CC) operations were limited to single RB in each carrier in the (50 MHz + 50 MHz) and (100 MHz + 100 MHz) modes. Note that inter-modulation products which can be seen in the band edge plots are evaluated as part of the radiated spurious emission measurements.

Verified through preliminary testing across other modulations and antenna configurations, there was no significant change of spectrum pattern at band edges on 1CC Full RB and 2CC Full RB, therefore no further investigation was performed on 2CC Full RB operation.

RESULTS



See the following pages.

TESTED BY:

Employee IDs: 19296 & 19459, n261 band, Chamber 1
Employee IDs: 19470 & 19437, n260 band, Chamber 2


8.3.1. BAND EDGE RESULTS n260 SISO-DUAL 1CC

ANT M1, 50 MHz, SISO-DUAL, 1CC, QPSK

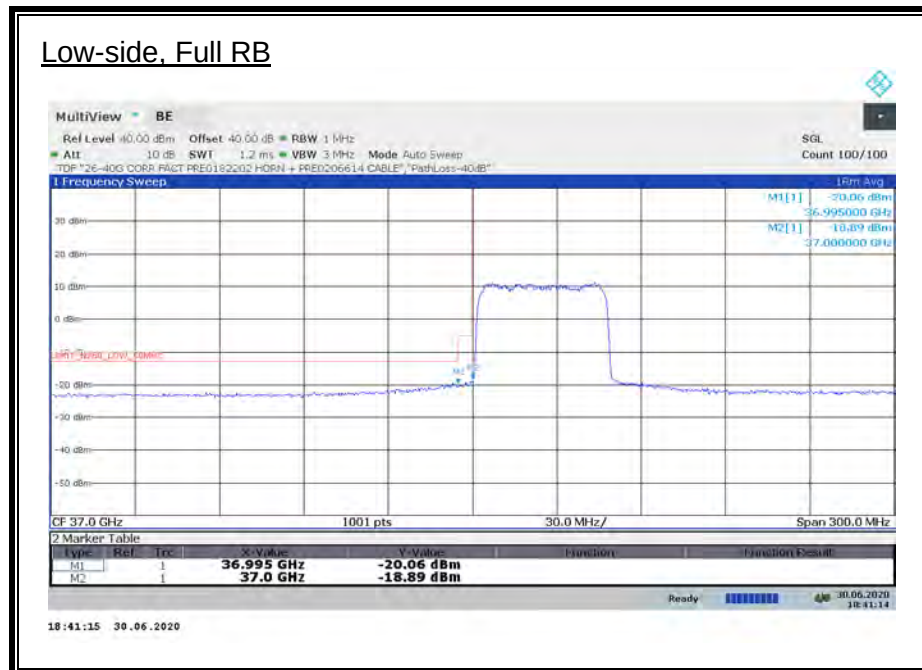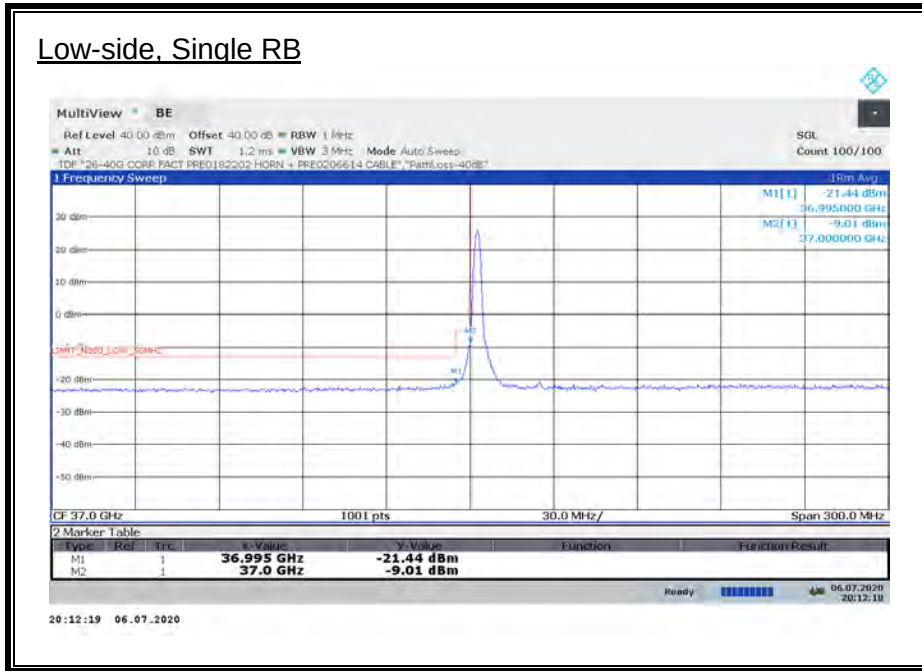

ANT M1, 50 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

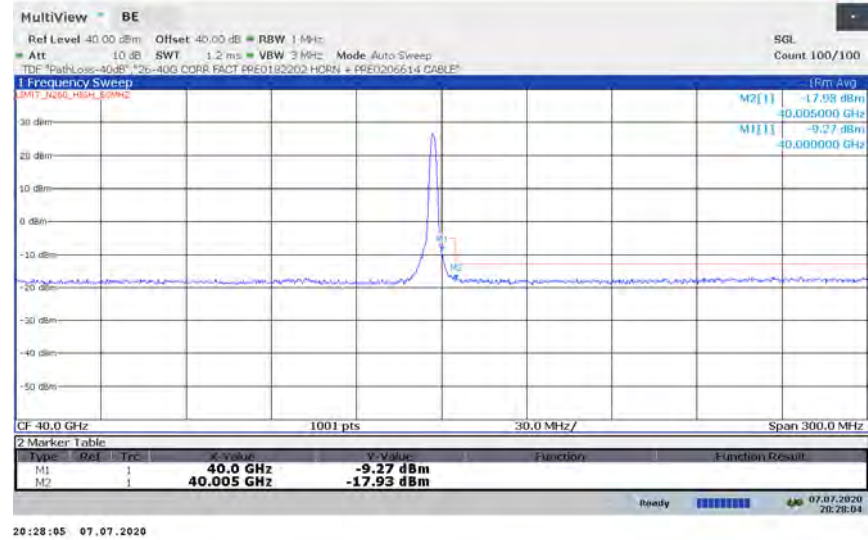


High-side, Full RB



ANT M2, 50 MHz, SISO-DUAL, 1CC, QPSK



Low-side, Single RB

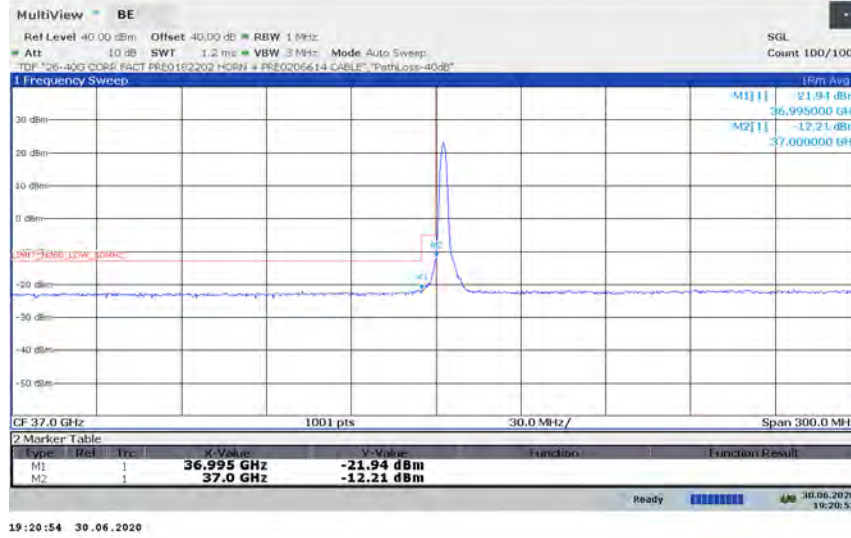

Low-side, Full RB



ANT M2, 50 MHz, SISO-DUAL, 1CC, QPSK

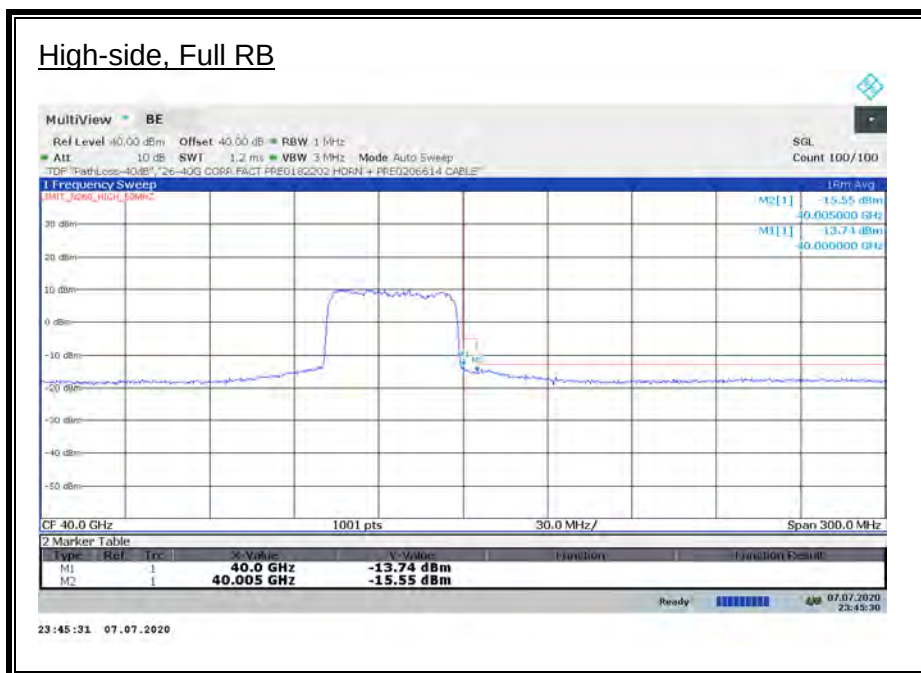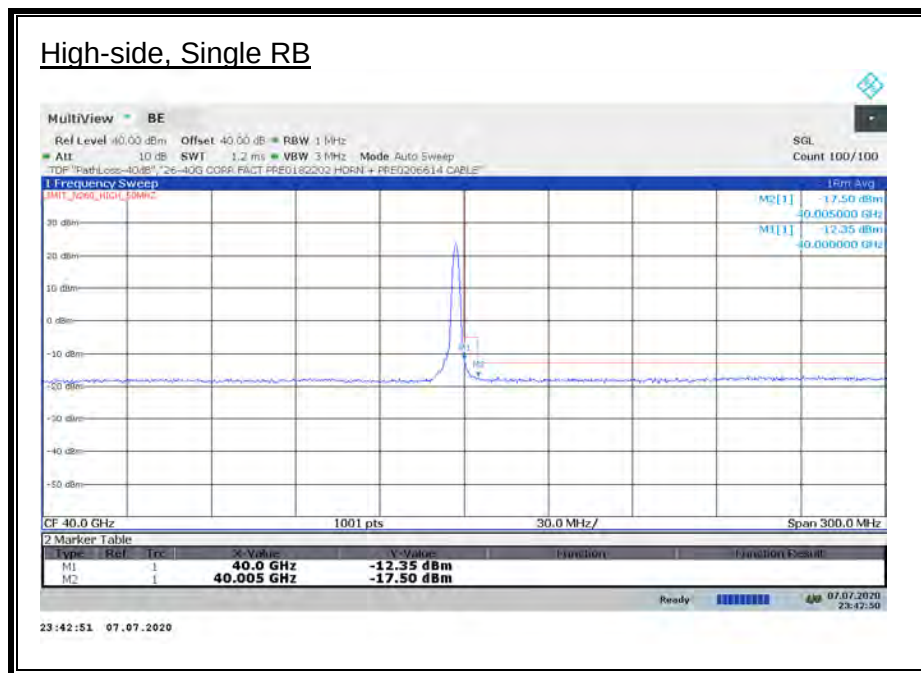

ANT M1 and M2, 50 MHz, SISO-DUAL, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-9.01	-5	-4.01
M1	50	L	1/0	36.995	-21.44	-13	-8.44
M2	50	L	1/0	37	-12.21	-5	-7.21
M2	50	L	1/0	36.995	-21.94	-13	-8.94
M1	50	L	32/0	37	-18.89	-5	-13.89
M1	50	L	32/0	36.995	-20.06	-13	-7.06
M2	50	L	32/0	37	-14.80	-5	-9.80
M2	50	L	32/0	36.995	-15.93	-13	-2.93
M1	50	H	1/32	40	-9.27	-5	-4.27
M1	50	H	1/32	40.005	-17.93	-13	-4.93
M2	50	H	1/32	40	-12.35	-5	-7.35
M2	50	H	1/32	40.005	-17.50	-13	-4.50
M1	50	H	32/0	40	-16.03	-5	-11.03
M1	50	H	32/0	40.005	-16.77	-13	-3.77
M2	50	H	32/0	40	-13.74	-5	-8.74
M2	50	H	32/0	40.005	-15.55	-13	-2.55

ANT M1 and M2, 50 MHz, SISO-DUAL, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-13.89	-5	-8.89
M1	50	L	1/0	36.995	-22.89	-13	-9.89
M2	50	L	1/0	37	-16.27	-5	-11.27
M2	50	L	1/0	36.995	-22.93	-13	-9.93
M1	50	L	32/0	37	-21.83	-5	-16.83
M1	50	L	32/0	36.995	-23.21	-13	-10.21
M2	50	L	32/0	37	-20.75	-5	-15.75
M2	50	L	32/0	36.995	-22.29	-13	-9.29
M1	50	H	1/32	40	-15.11	-5	-10.11
M1	50	H	1/32	40.005	-18.71	-13	-5.71
M2	50	H	1/32	40	-15.58	-5	-10.58
M2	50	H	1/32	40.005	-18.52	-13	-5.52
M1	50	H	32/0	40	-19.02	-5	-14.02
M1	50	H	32/0	40.005	-18.07	-13	-5.07
M2	50	H	32/0	40	-18.28	-5	-13.28
M2	50	H	32/0	40.005	-18.34	-13	-5.34

ANT M1 and M2, 50 MHz, SISO-DUAL, 1CC, 16QAM


Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M1	50	L	1/0	37	-11.91	-5	-6.91
M1	50	L	1/0	36.995	-22.60	-13	-9.60
M2	50	L	1/0	37	-13.95	-5	-8.95
M2	50	L	1/0	36.995	-22.02	-13	-9.02
M1	50	L	32/0	37	-20.61	-5	-15.61
M1	50	L	32/0	36.995	-21.90	-13	-8.90
M2	50	L	32/0	37	-18.73	-5	-13.73
M2	50	L	32/0	36.995	-19.60	-13	-6.60
M1	50	H	1/32	40	-11.74	-5	-6.74
M1	50	H	1/32	40.005	-17.99	-13	-4.99
M2	50	H	1/32	40	-13.42	-5	-8.42
M2	50	H	1/32	40.005	-18.73	-13	-5.73
M1	50	H	32/0	40	-17.91	-5	-12.91
M1	50	H	32/0	40.005	-17.51	-13	-4.51
M2	50	H	32/0	40	-16.24	-5	-11.24
M2	50	H	32/0	40.005	-16.40	-13	-3.40

ANT M1 and M2, 50 MHz, SISO-DUAL, 1CC, 64QAM

Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M1	50	L	1/0	37	-13.54	-5	-8.54
M1	50	L	1/0	36.995	-22.88	-13	-9.88
M2	50	L	1/0	37	-14.97	-5	-9.97
M2	50	L	1/0	36.995	-22.82	-13	-9.82
M1	50	L	32/0	37	-22.74	-5	-17.74
M1	50	L	32/0	36.995	-23.09	-13	-10.09
M2	50	L	32/0	37	-20.57	-5	-15.57
M2	50	L	32/0	36.995	-22.11	-13	-9.11
M1	50	H	1/32	40	-12.08	-5	-7.08
M1	50	H	1/32	40.005	-18.12	-13	-5.12
M2	50	H	1/32	40	-14.84	-5	-9.84
M2	50	H	1/32	40.005	-18.48	-13	-5.48
M1	50	H	32/0	40	-17.62	-5	-12.62
M1	50	H	32/0	40.005	-17.89	-13	-4.89
M2	50	H	32/0	40	-17.95	-5	-12.95
M2	50	H	32/0	40.005	-18.42	-13	-5.42

ANT M1, 100 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

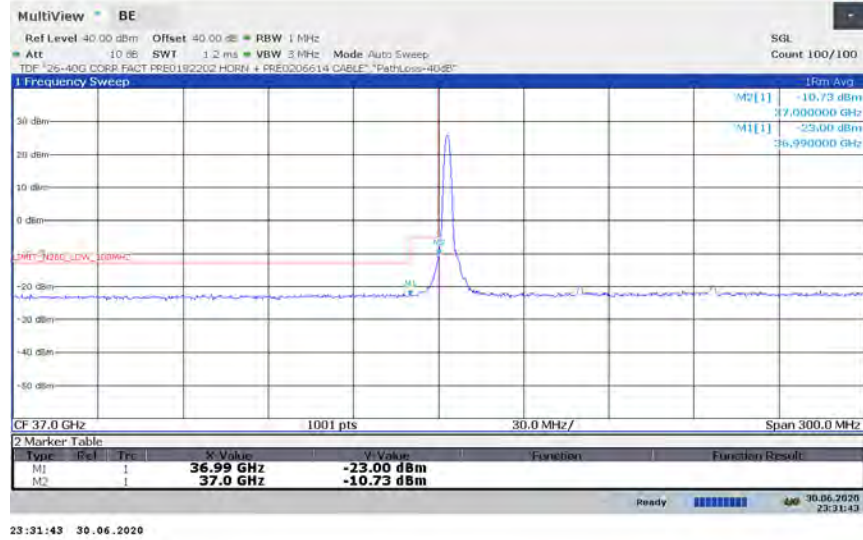


Low-side, Full RB




ANT M1, 100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

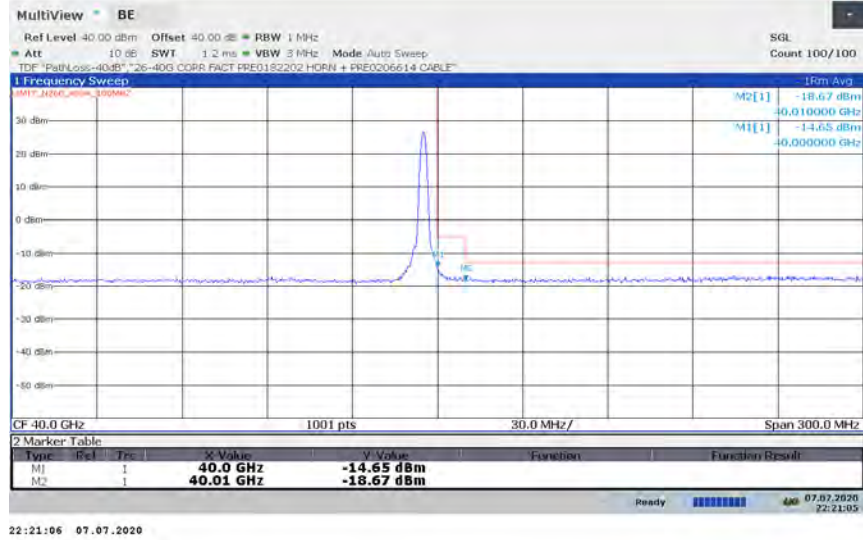

High-side, Full RB

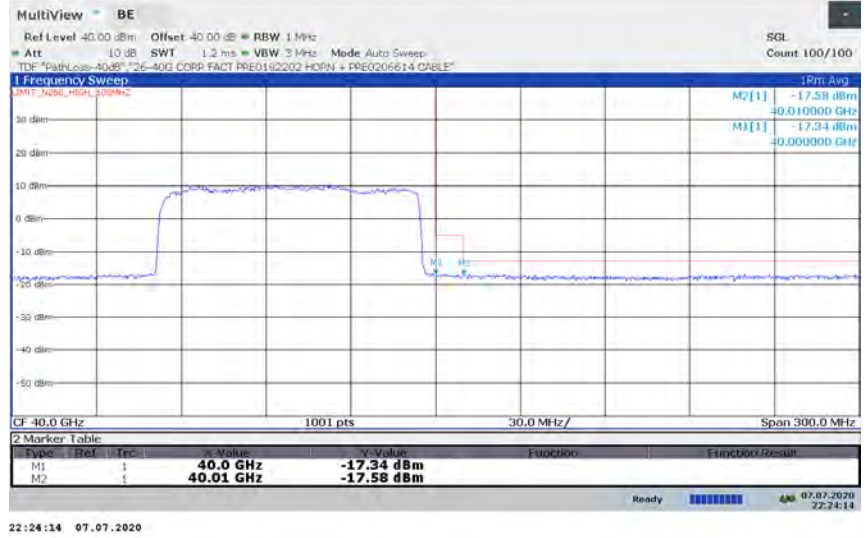

ANT M2, 100 MHz, SISO-DUAL, 1CC, QPSK



Low-side, Single RB



Low-side, Full RB



ANT M2, 100 MHz, SISO-DUAL, 1CC, QPSK

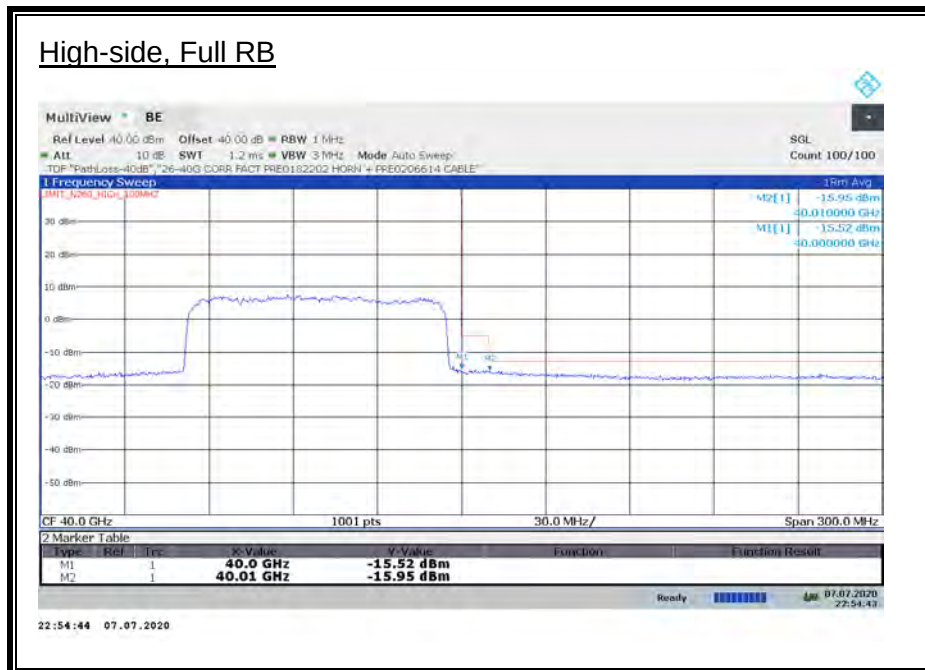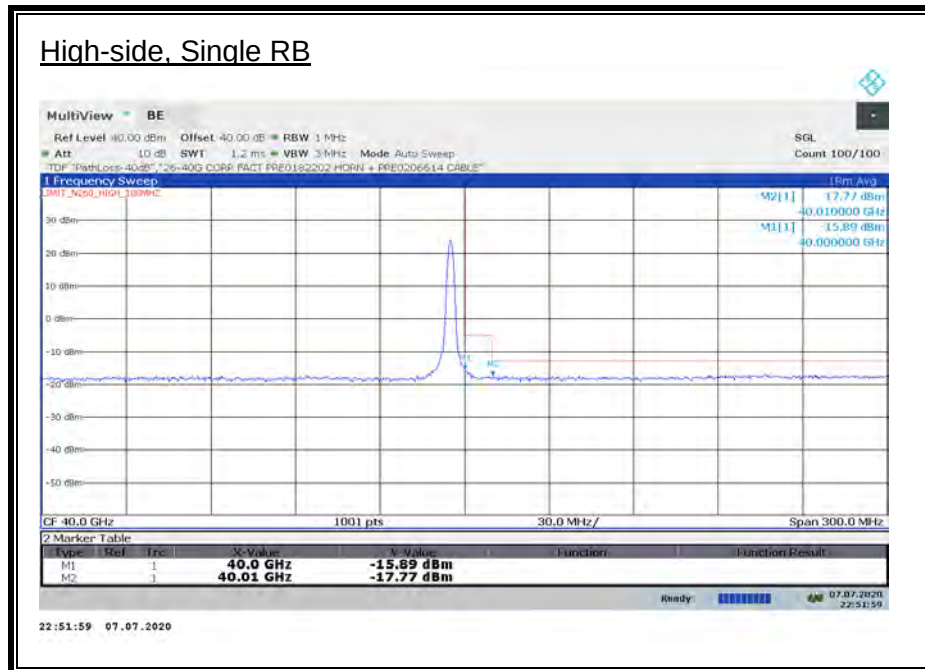

ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, QPSK

Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M1	100	L	1/0	37	-10.73	-5	-5.73
M1	100	L	1/0	36.99	-23.00	-13	-10.00
M2	100	L	1/0	37	-14.21	-5	-9.21
M2	100	L	1/0	36.99	-22.49	-13	-9.49
M1	100	L	64/0	37	-20.01	-5	-15.01
M1	100	L	64/0	36.99	-21.37	-13	-8.37
M2	100	L	64/0	37	-21.45	-5	-16.45
M2	100	L	64/0	36.99	-21.64	-13	-8.64
M1	100	H	1/64	40	-14.65	-5	-9.65
M1	100	H	1/64	40.01	-18.67	-13	-5.67
M2	100	H	1/64	40	-15.89	-5	-10.89
M2	100	H	1/64	40.01	-17.77	-13	-4.77
M1	100	H	64/0	40	-17.34	-5	-12.34
M1	100	H	64/0	40.01	-17.58	-13	-4.58
M2	100	H	64/0	40	-15.52	-5	-10.52
M2	100	H	64/0	40.01	-15.95	-13	-2.95

ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, BPSK

Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M1	100	L	1/0	37	-15.95	-5	-10.95
M1	100	L	1/0	36.99	-22.85	-13	-9.85
M2	100	L	1/0	37	-18.85	-5	-13.85
M2	100	L	1/0	36.99	-23.36	-13	-10.36
M1	100	L	64/0	37	-22.55	-5	-17.55
M1	100	L	64/0	36.99	-23.11	-13	-10.11
M2	100	L	64/0	37	-21.05	-5	-16.05
M2	100	L	64/0	36.99	-22.78	-13	-9.78
M1	100	H	1/64	40	-17.75	-5	-12.75
M1	100	H	1/64	40.01	-19.09	-13	-6.09
M2	100	H	1/64	40	-18.13	-5	-13.13
M2	100	H	1/64	40.01	-18.60	-13	-5.60
M1	100	H	64/0	40	-18.56	-5	-13.56
M1	100	H	64/0	40.01	-18.76	-13	-5.76
M2	100	H	64/0	40	-19.18	-5	-14.18
M2	100	H	64/0	40.01	-18.90	-13	-5.90

ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, 16QAM


Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M1	100	L	1/0	37	-12.69	-5	-7.69
M1	100	L	1/0	36.99	-22.29	-13	-9.29
M2	100	L	1/0	37	-19.78	-5	-14.78
M2	100	L	1/0	36.99	-22.35	-13	-9.35
M1	100	L	64/0	37	-21.78	-5	-16.78
M1	100	L	64/0	36.99	-22.93	-13	-9.93
M2	100	L	64/0	37	-22.64	-5	-17.64
M2	100	L	64/0	36.99	-22.77	-13	-9.77
M1	100	H	1/64	40	-15.75	-5	-10.75
M1	100	H	1/64	40.01	-18.43	-13	-5.43
M2	100	H	1/64	40	-16.71	-5	-11.71
M2	100	H	1/64	40.01	-17.53	-13	-4.53
M1	100	H	64/0	40	-18.01	-5	-13.01
M1	100	H	64/0	40.01	-18.05	-13	-5.05
M2	100	H	64/0	40	-16.90	-5	-11.90
M2	100	H	64/0	40.01	-17.44	-13	-4.44

ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, 64QAM

Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M1	100	L	1/0	37	-13.73	-5	-8.73
M1	100	L	1/0	36.99	-22.48	-13	-9.48
M2	100	L	1/0	37	-19.00	-5	-14.00
M2	100	L	1/0	36.99	-22.89	-13	-9.89
M1	100	L	64/0	37	-22.08	-5	-17.08
M1	100	L	64/0	36.99	-22.66	-13	-9.66
M2	100	L	64/0	37	-22.67	-5	-17.67
M2	100	L	64/0	36.99	-23.22	-13	-10.22
M1	100	H	1/64	40	-15.64	-5	-10.64
M1	100	H	1/64	40.01	-18.19	-13	-5.19
M2	100	H	1/64	40	-17.49	-5	-12.49
M2	100	H	1/64	40.01	-18.40	-13	-5.40
M1	100	H	64/0	40	-18.44	-5	-13.44
M1	100	H	64/0	40.01	-18.68	-13	-5.68
M2	100	H	64/0	40	-18.46	-5	-13.46
M2	100	H	64/0	40.01	-18.21	-13	-5.21

8.3.2. BAND EDGE RESULTS n260 SISO-DUAL 2CC

ANT M1, 50 MHz, SISO-DUAL, 2CC, QPSK

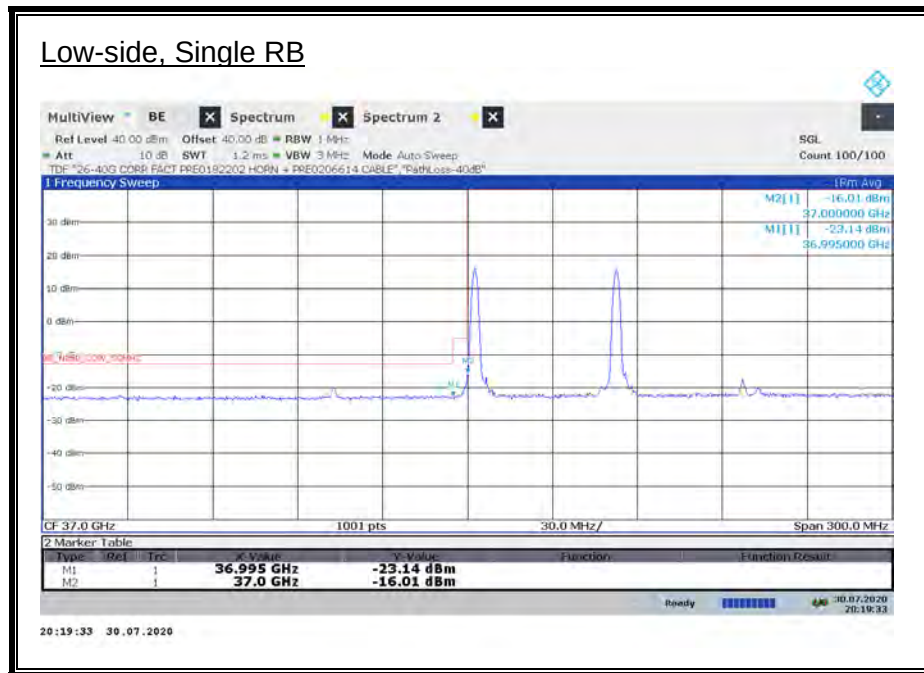


ANT M1, 50 MHz, SISO-DUAL, 2CC, QPSK



ANT M2, 50 MHz, SISO-DUAL, 2CC, QPSK



ANT M2, 50 MHz, SISO-DUAL, 2CC, QPSK

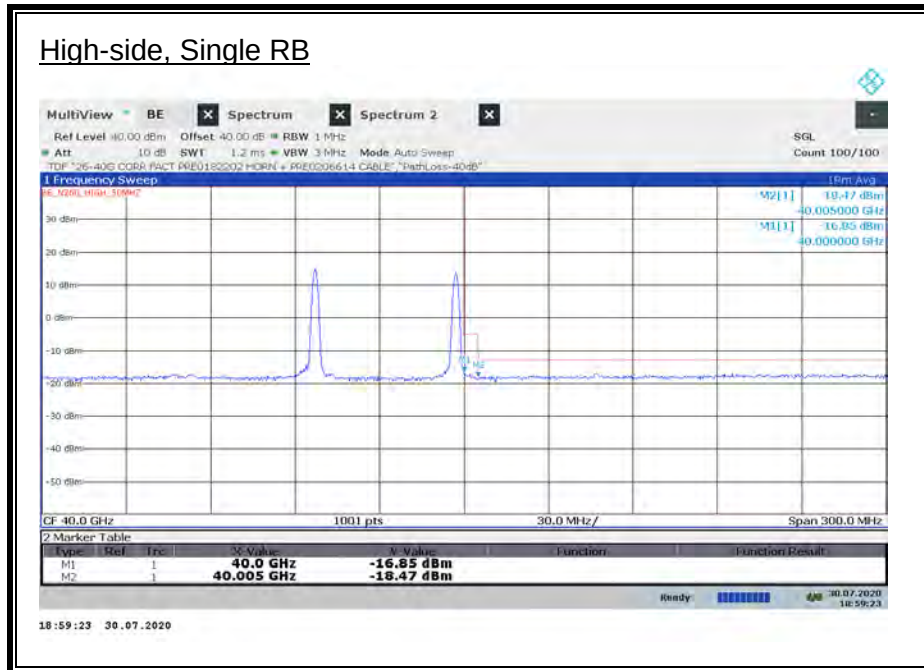

ANT 1 & M2, 50 MHz, SISO-DUAL, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-16.01	-5	-11.01
M1	50	L	1/0	36.995	-23.14	-13	-10.14
M2	50	L	1/0	37	-17.93	-5	-12.93
M2	50	L	1/0	36.995	-22.59	-13	-9.59
M1	50	H	1/32	40	-16.25	-5	-11.25
M1	50	H	1/32	40.005	-18.07	-13	-5.07
M2	50	H	1/32	40	-16.85	-5	-11.85
M2	50	H	1/32	40.005	-18.47	-13	-5.47

ANT M1 & M2, 50 MHz, SISO-DUAL, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-20.36	-5	-15.36
M1	50	L	1/0	36.995	-23.74	-13	-10.74
M2	50	L	1/0	37	-21.54	-5	-16.54
M2	50	L	1/0	36.995	-24.03	-13	-11.03
M1	50	H	1/32	40	-20.80	-5	-15.80
M1	50	H	1/32	40.005	-24.14	-13	-11.14
M2	50	H	1/32	40	-23.38	-5	-18.38
M2	50	H	1/32	40.005	-24.56	-13	-11.56


ANT M1 & M2, 50 MHz, SISO-DUAL, 2CC, 16QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-18.68	-5	-13.68
M1	50	L	1/0	36.995	-22.75	-13	-9.75
M2	50	L	1/0	37	-19.34	-5	-14.34
M2	50	L	1/0	36.995	-22.93	-13	-9.93
M1	50	H	1/32	40	-18.16	-5	-13.16
M1	50	H	1/32	40.005	-17.60	-13	-4.60
M2	50	H	1/32	40	-18.19	-5	-13.19
M2	50	H	1/32	40.005	-18.79	-13	-5.79


ANT M1 & M2, 50 MHz, SISO-DUAL, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-21.78	-5	-16.78
M1	50	L	1/0	36.995	-23.42	-13	-10.42
M2	50	L	1/0	37	-20.44	-5	-15.44
M2	50	L	1/0	36.995	-22.94	-13	-9.94
M1	50	H	1/32	40	-18.20	-5	-13.20
M1	50	H	1/32	40.005	-18.75	-13	-5.75
M2	50	H	1/32	40	-18.84	-5	-13.84
M2	50	H	1/32	40.005	-18.18	-13	-5.18


ANT M1, 100 MHz, SISO-DUAL, 2CC, QPSK

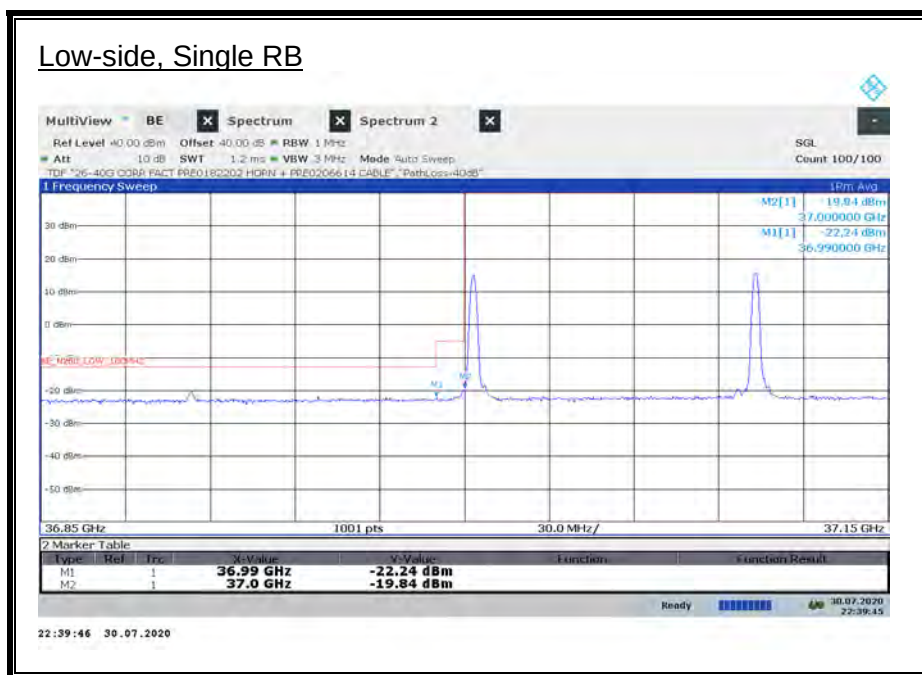


ANT M1, 100 MHz, SISO-DUAL, 2CC, QPSK

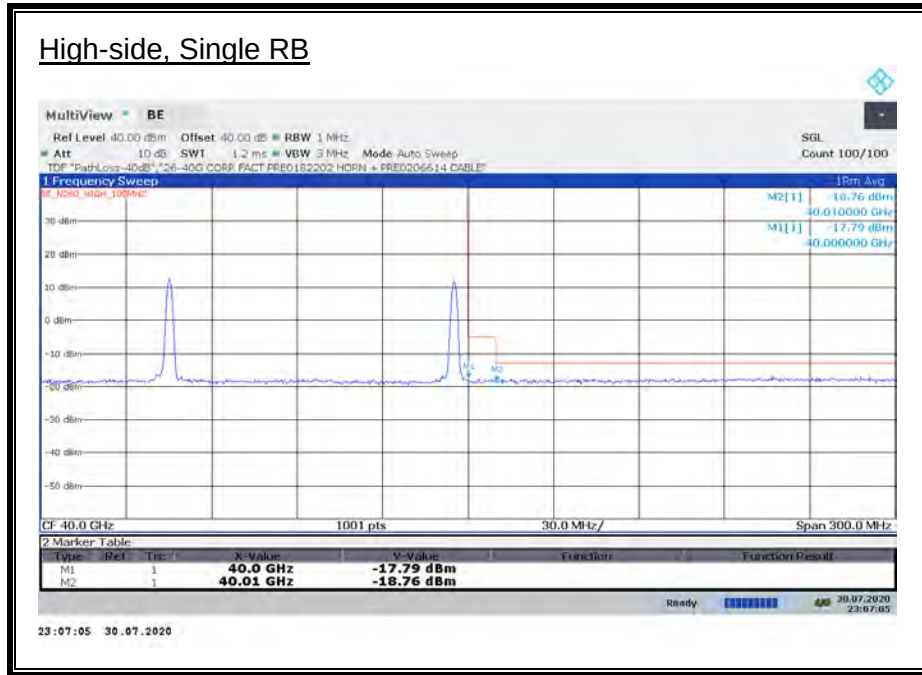

ANT M2, 100 MHz, SISO-DUAL, 2CC, QPSK

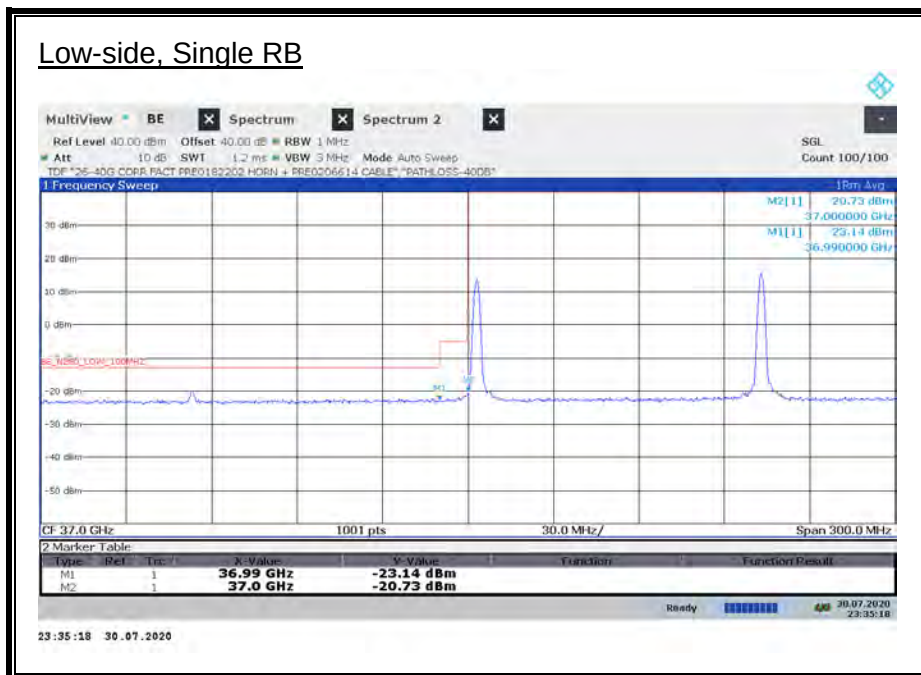

ANT M2, 100 MHz, SISO-DUAL, 2CC, QPSK

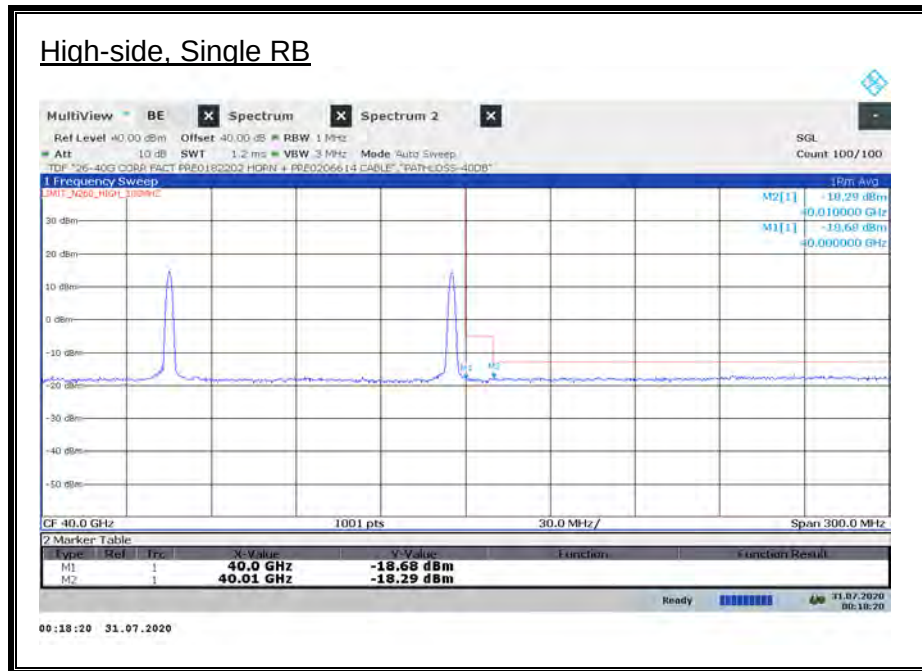

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-19.84	-5	-14.84
M1	100	L	1/0	36.99	-22.24	-13	-9.24
M2	100	L	1/0	37	-20.73	-5	-15.73
M2	100	L	1/0	36.99	-23.14	-13	-10.14
M1	100	H	1/64	40	-17.79	-5	-12.79
M1	100	H	1/64	40.01	-18.76	-13	-5.76
M2	100	H	1/64	40	-18.68	-5	-13.68
M2	100	H	1/64	40.01	-18.29	-13	-5.29

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-20.80	-5	-15.80
M1	100	L	1/0	36.99	-24.14	-13	-11.14
M2	100	L	1/0	37	-23.38	-5	-18.38
M2	100	L	1/0	36.99	-24.56	-13	-11.56
M1	100	H	1/64	40	-18.28	-5	-13.28
M1	100	H	1/64	40.01	-20.17	-13	-7.17
M2	100	H	1/64	40	-19.67	-5	-14.67
M2	100	H	1/64	40.01	-19.47	-13	-6.47

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-20.86	-5	-15.86
M1	100	L	1/0	36.99	-23.34	-13	-10.34
M2	100	L	1/0	37	-21.61	-5	-16.61
M2	100	L	1/0	36.99	-23.34	-13	-10.34
M1	100	H	1/64	40	-17.79	-5	-12.79
M1	100	H	1/64	40.01	-18.70	-13	-5.70
M2	100	H	1/64	40	-17.57	-5	-12.57
M2	100	H	1/64	40.01	-18.31	-13	-5.31

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, 64QAM



Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-21.54	-5	-16.54
M1	100	L	1/0	36.99	-23.10	-13	-10.10
M2	100	L	1/0	37	-22.30	-5	-17.30
M2	100	L	1/0	36.99	-22.71	-13	-9.71
M1	100	H	1/64	40	-18.54	-5	-13.54
M1	100	H	1/64	40.01	-18.21	-13	-5.21
M2	100	H	1/64	40	-18.52	-5	-13.52
M2	100	H	1/64	40.01	-18.25	-13	-5.25

8.3.3. BAND EDGE RESULTS n260 MIMO 1CC



ANT M1, 50 MHz, MIMO, 1CC, QPSK

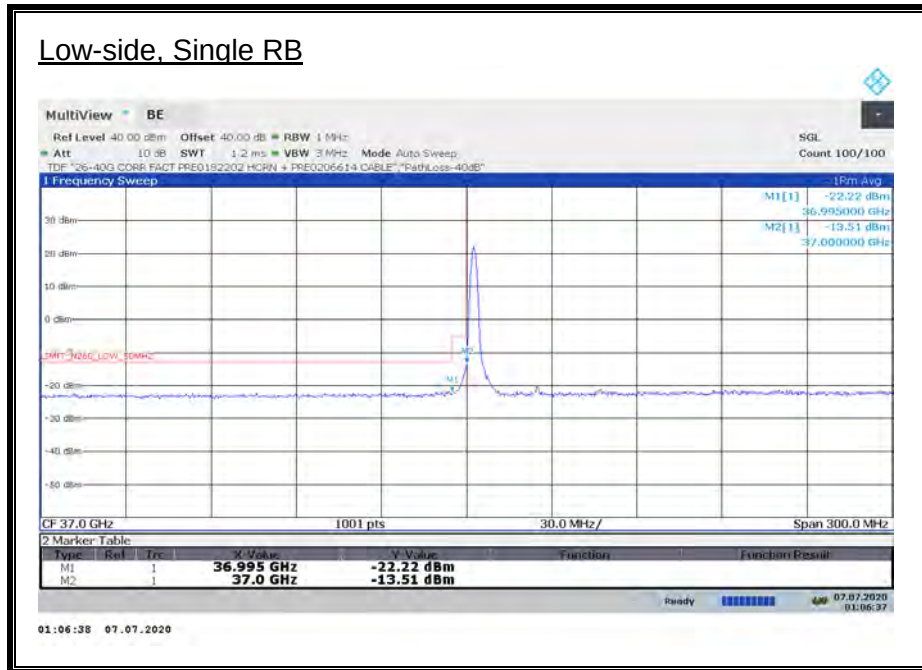



ANT M1, 50 MHz, MIMO, 1CC, QPSK

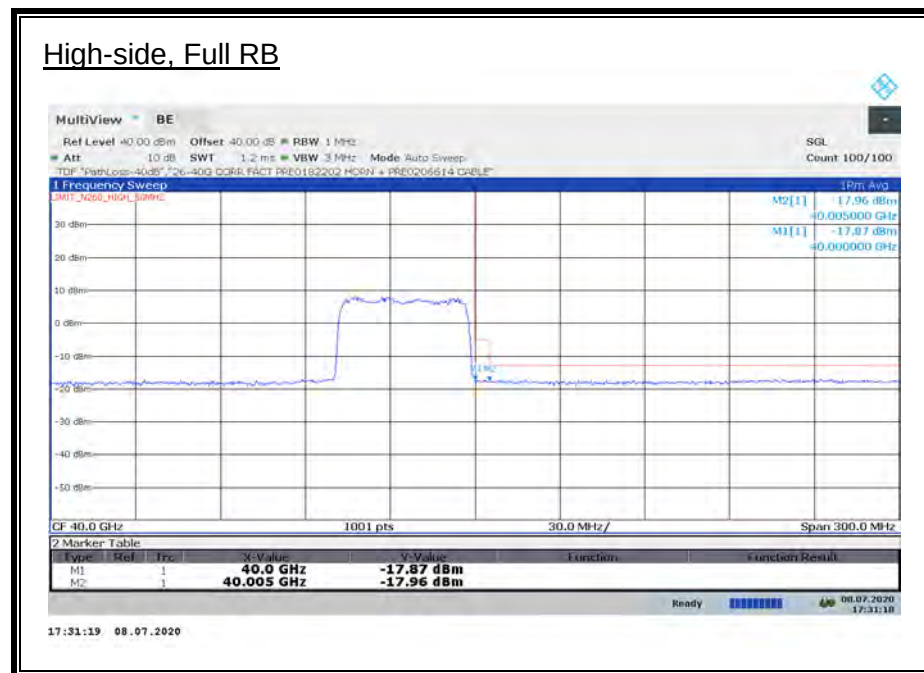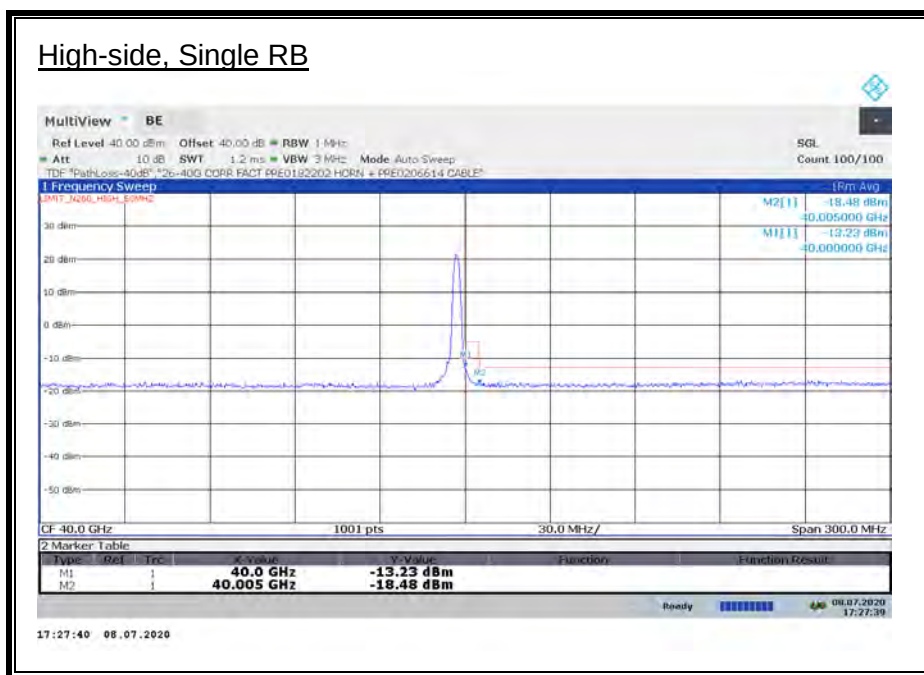

ANT M2, 50 MHz, MIMO, 1CC, QPSK

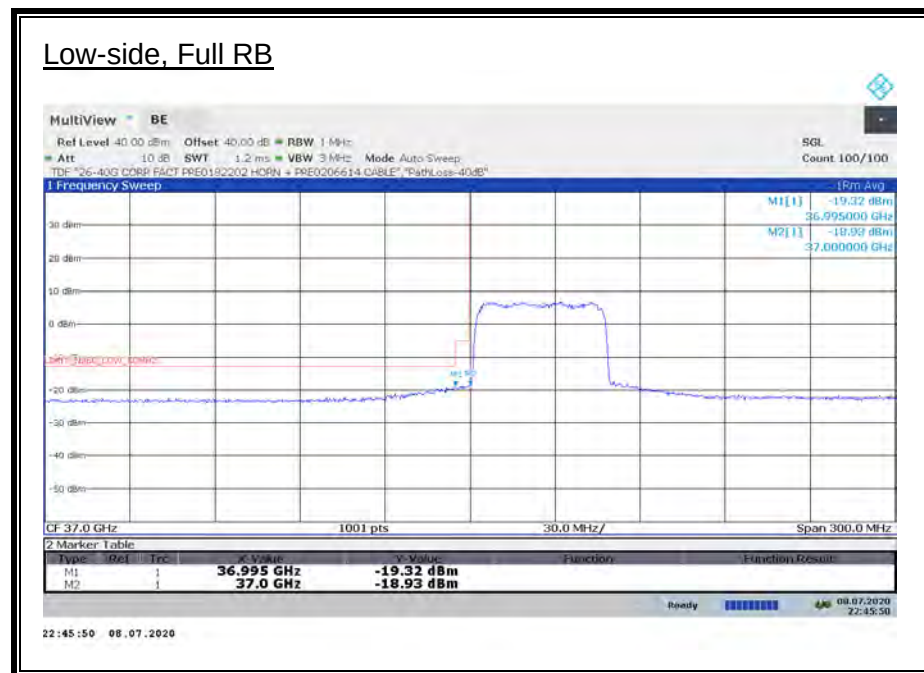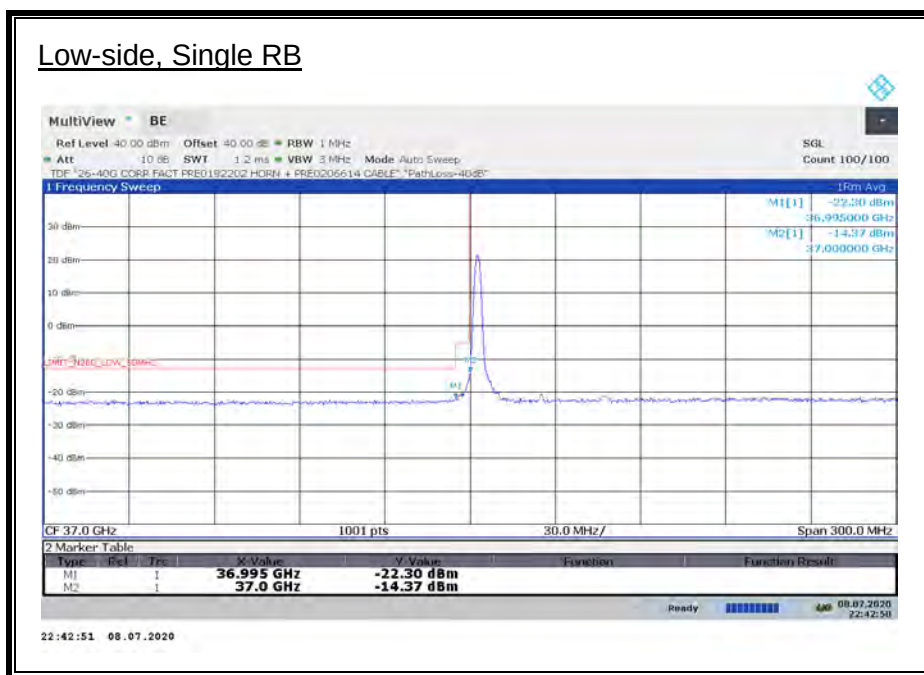

ANT M2, 50 MHz, MIMO, 1CC, QPSK

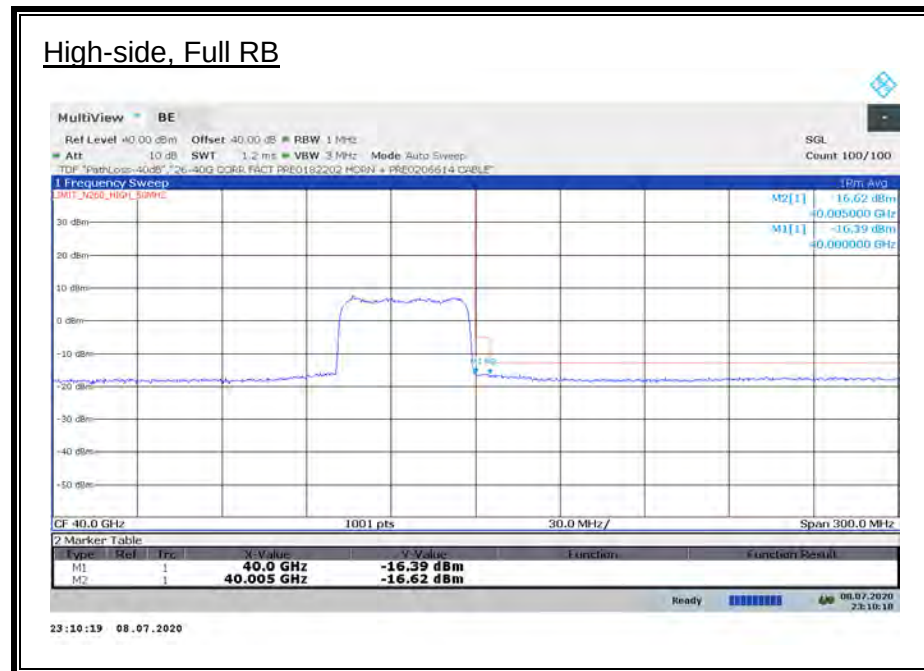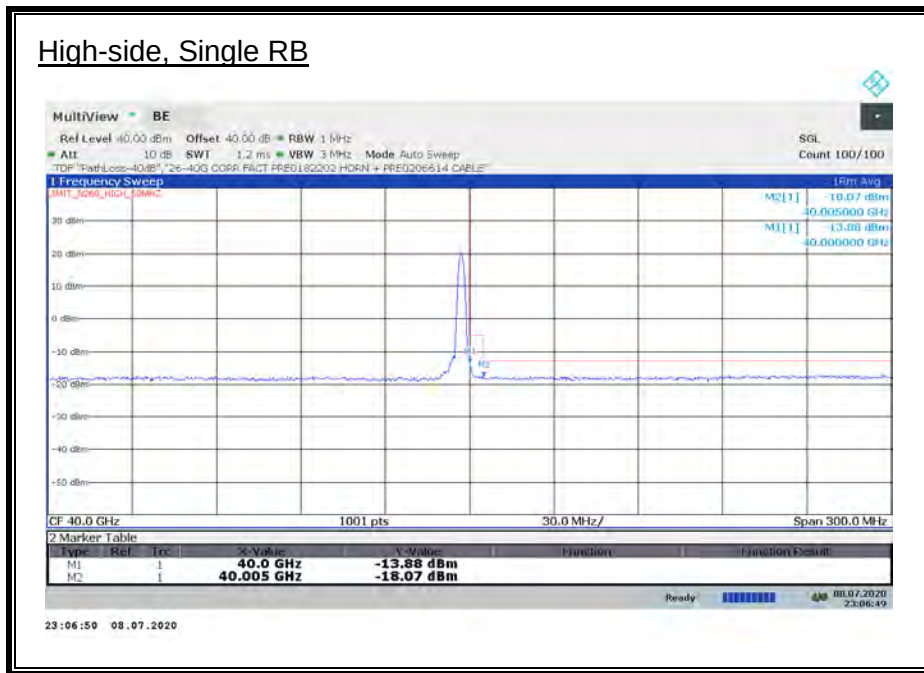

ANT M1 and M2, 50 MHz, MIMO, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-13.51	-5	-8.51
M1	50	L	1/0	36.995	-22.22	-13	-9.22
M2	50	L	1/0	37	-14.37	-5	-9.37
M2	50	L	1/0	36.995	-22.30	-13	-9.30
M1	50	L	32/0	37	-20.97	-5	-15.97
M1	50	L	32/0	36.995	-22.28	-13	-9.28
M2	50	L	32/0	37	-18.93	-5	-13.93
M2	50	L	32/0	36.995	-19.32	-13	-6.32
M1	50	H	1/32	40	-13.23	-5	-8.23
M1	50	H	1/32	40.005	-18.48	-13	-5.48
M2	50	H	1/32	40	-13.88	-5	-8.88
M2	50	H	1/32	40.005	-18.07	-13	-5.07
M1	50	H	32/0	40	-17.87	-5	-12.87
M1	50	H	32/0	40.005	-17.96	-13	-4.96
M2	50	H	32/0	40	-16.39	-5	-11.39
M2	50	H	32/0	40.005	-16.62	-13	-3.62

ANT M1 and M2, 50 MHz, MIMO, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-22.53	-5	-17.53
M1	50	L	1/0	36.995	-23.28	-13	-10.28
M2	50	L	1/0	37	-20.59	-5	-15.59
M2	50	L	1/0	36.995	-23.09	-13	-10.09
M1	50	L	32/0	37	-23.27	-5	-18.27
M1	50	L	32/0	36.995	-23.21	-13	-10.21
M2	50	L	32/0	37	-23.52	-5	-18.52
M2	50	L	32/0	36.995	-23.65	-13	-10.65
M1	50	H	1/32	40	-17.64	-5	-12.64
M1	50	H	1/32	40.005	-18.80	-13	-5.80
M2	50	H	1/32	40	-16.96	-5	-11.96
M2	50	H	1/32	40.005	-18.19	-13	-5.19
M1	50	H	32/0	40	-18.72	-5	-13.72
M1	50	H	32/0	40.005	-18.96	-13	-5.96
M2	50	H	32/0	40	-18.59	-5	-13.59
M2	50	H	32/0	40.005	-19.02	-13	-6.02



ANT M1 and M2, 50 MHz, MIMO, 1CC, 16QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-15.62	-5	-10.62
M1	50	L	1/0	36.995	-22.54	-13	-9.54
M2	50	L	1/0	37	-16.78	-5	-11.78
M2	50	L	1/0	36.995	-22.34	-13	-9.34
M1	50	L	32/0	37	-21.63	-5	-16.63
M1	50	L	32/0	36.995	-22.40	-13	-9.40
M2	50	L	32/0	37	-20.79	-5	-15.79
M2	50	L	32/0	36.995	-21.18	-13	-8.18
M1	50	H	1/32	40	-14.16	-5	-9.16
M1	50	H	1/32	40.005	-18.64	-13	-5.64
M2	50	H	1/32	40	-13.70	-5	-8.70
M2	50	H	1/32	40.005	-17.84	-13	-4.84
M1	50	H	32/0	40	-17.99	-5	-12.99
M1	50	H	32/0	40.005	-17.80	-13	-4.80
M2	50	H	32/0	40	-17.43	-5	-12.43
M2	50	H	32/0	40.005	-17.67	-13	-4.67



ANT M1 and M2, 50 MHz, MIMO, 1CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-18.22	-5	-13.22
M1	50	L	1/0	36.995	-22.43	-13	-9.43
M2	50	L	1/0	37	-18.04	-5	-13.04
M2	50	L	1/0	36.995	-22.52	-13	-9.52
M1	50	L	32/0	37	-21.76	-5	-16.76
M1	50	L	32/0	36.995	-21.89	-13	-8.89
M2	50	L	32/0	37	-21.89	-5	-16.89
M2	50	L	32/0	36.995	-22.87	-13	-9.87
M1	50	H	1/32	40	-15.37	-5	-10.37
M1	50	H	1/32	40.005	-18.24	-13	-5.24
M2	50	H	1/32	40	-15.94	-5	-10.94
M2	50	H	1/32	40.005	-18.13	-13	-5.13
M1	50	H	32/0	40	-18.53	-5	-13.53
M1	50	H	32/0	40.005	-18.45	-13	-5.45
M2	50	H	32/0	40	-18.84	-5	-13.84
M2	50	H	32/0	40.005	-18.35	-13	-5.35



ANT M1, 100 MHz, MIMO, 1CC, QPSK

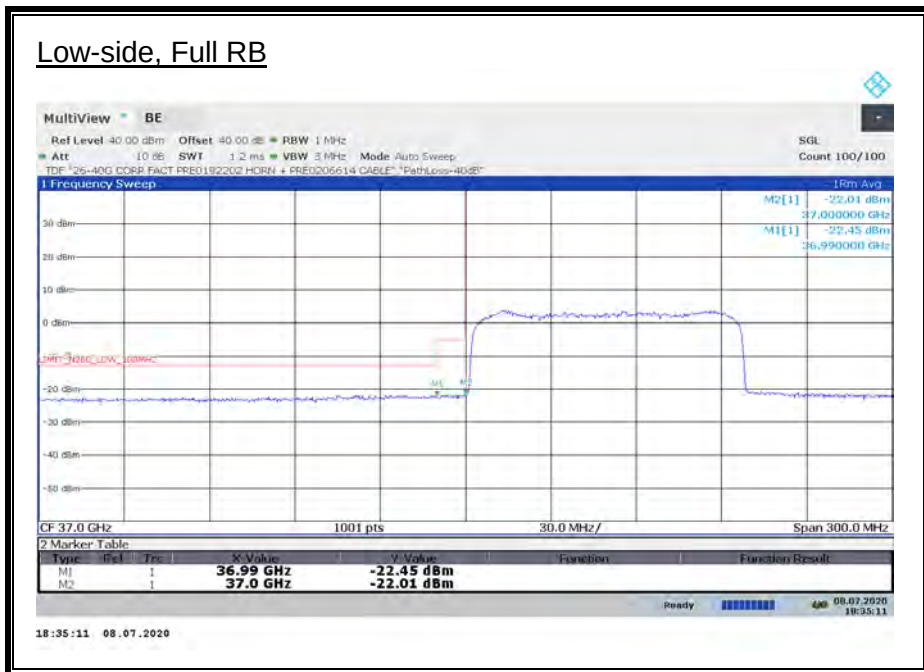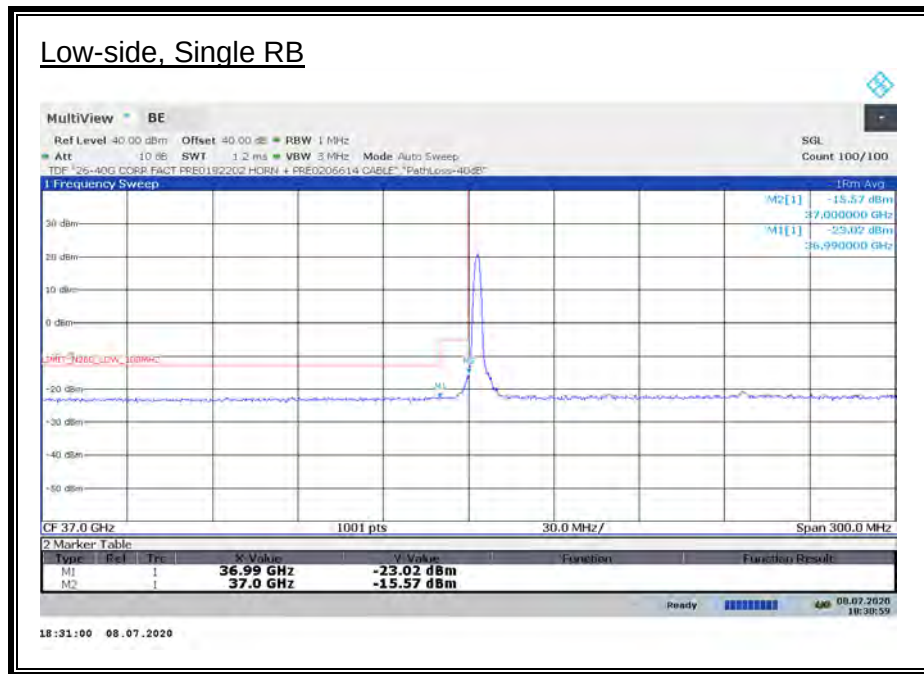



ANT M1, 100 MHz, MIMO, 1CC, QPSK

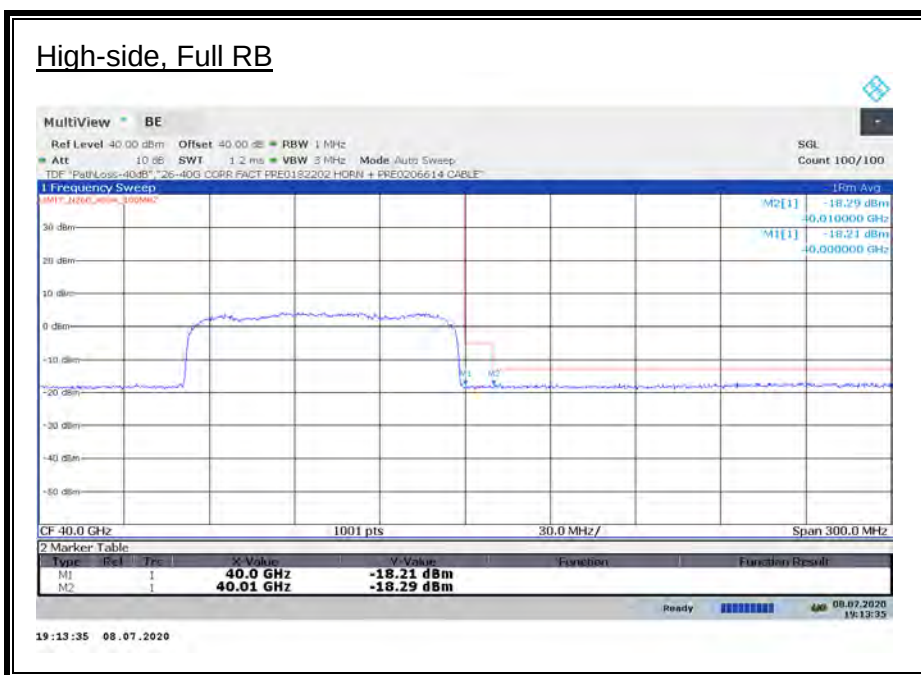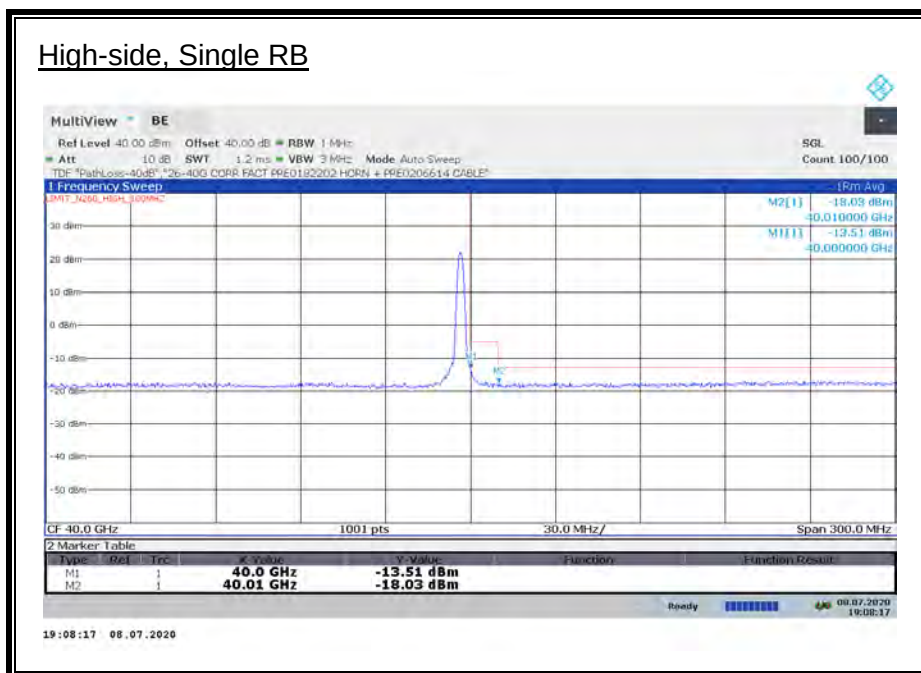

ANT M2, 100 MHz, MIMO, 1CC, QPSK

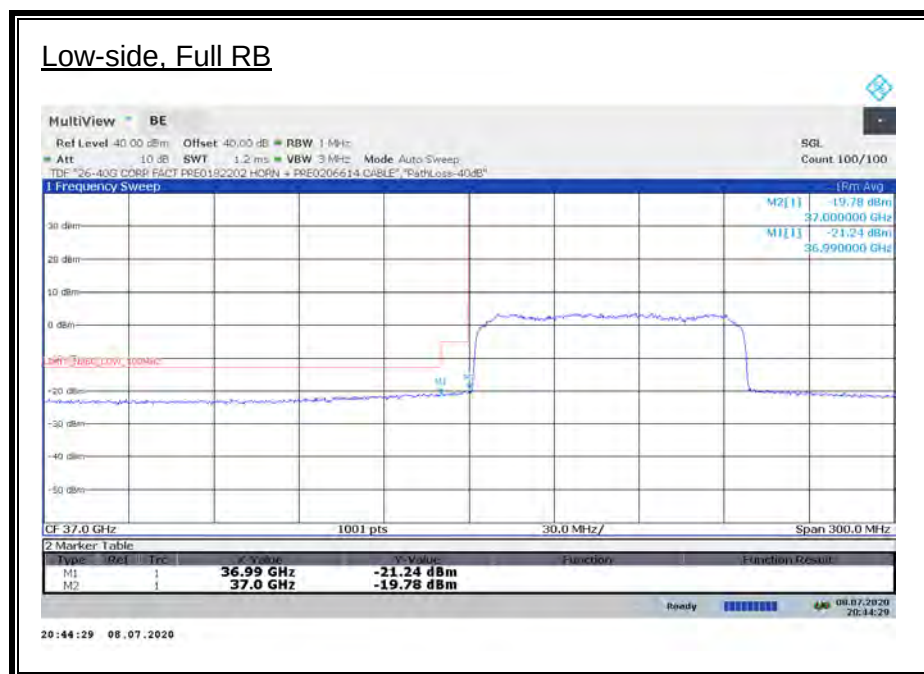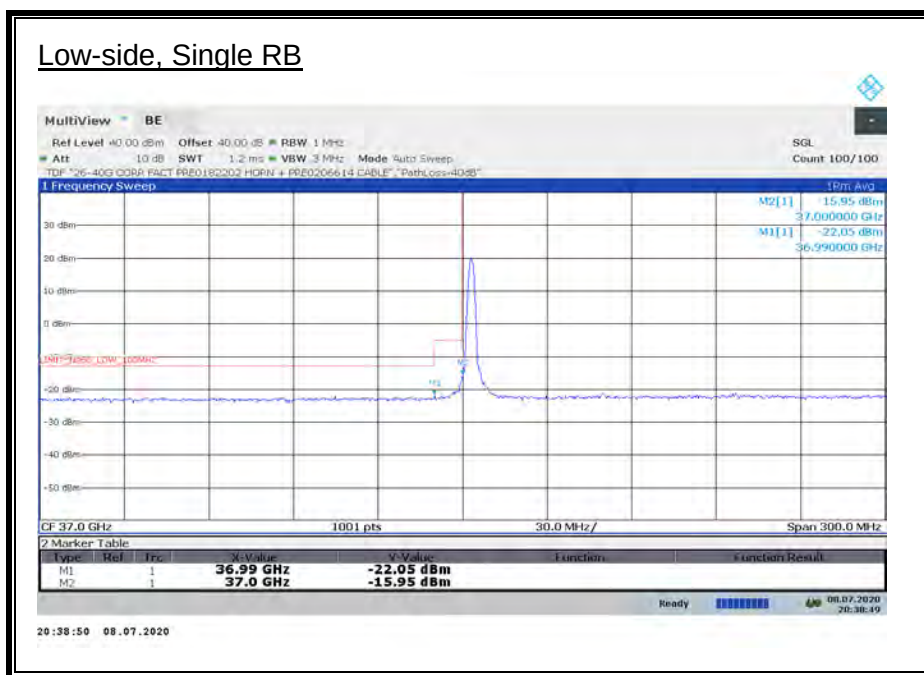

ANT M2, 100 MHz, MIMO, 1CC, QPSK

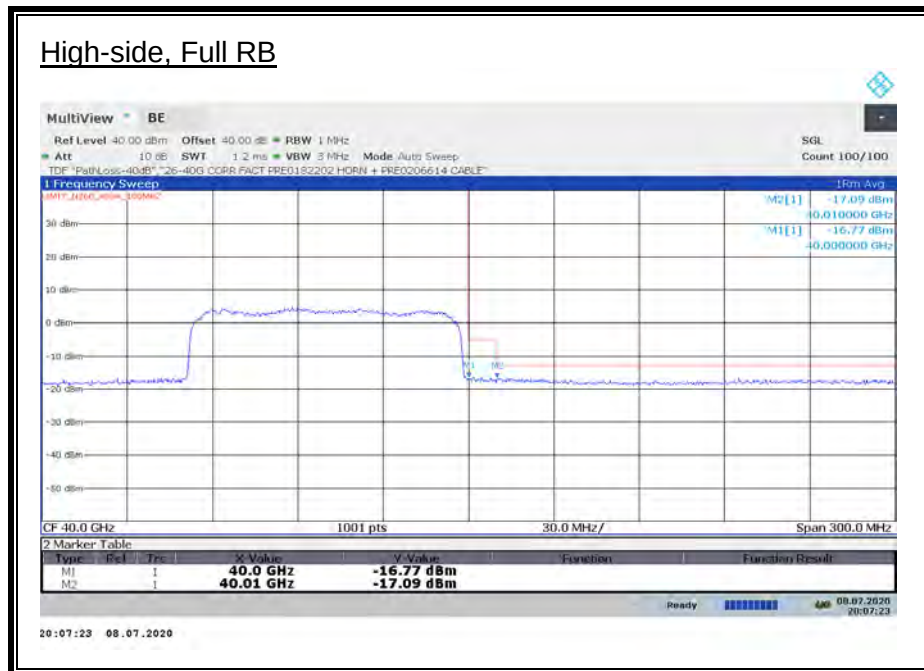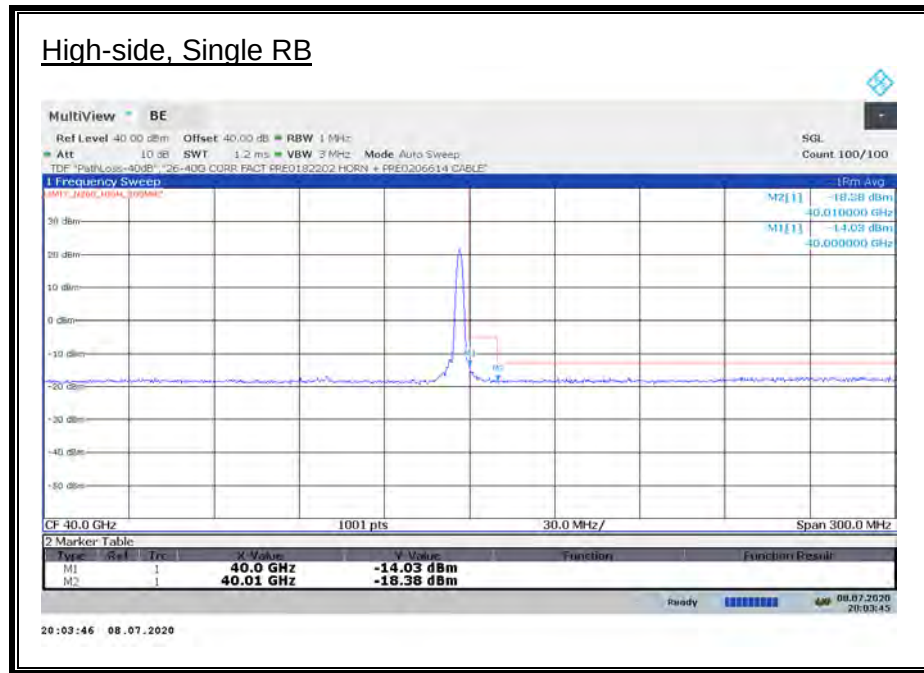

ANT M1 & M2, 100 MHz, MIMO, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-15.57	-5	-10.57
M1	100	L	1/0	36.99	-23.02	-13	-10.02
M2	100	L	1/0	37	-15.95	-5	-10.95
M2	100	L	1/0	36.99	-22.05	-13	-9.05
M1	100	L	66/0	37	-22.01	-5	-17.01
M1	100	L	66/0	36.99	-22.45	-13	-9.45
M2	100	L	66/0	37	-19.78	-5	-14.78
M2	100	L	66/0	36.99	-21.24	-13	-8.24
M1	100	H	1/66	40	-13.51	-5	-8.51
M1	100	H	1/66	40.01	-18.03	-13	-5.03
M2	100	H	1/66	40	-14.03	-5	-9.03
M2	100	H	1/66	40.01	-18.38	-13	-5.38
M1	100	H	66/0	40	-18.21	-5	-13.21
M1	100	H	66/0	40.01	-18.29	-13	-5.29
M2	100	H	66/0	40	-16.77	-5	-11.77
M2	100	H	66/0	40.01	-17.09	-13	-4.09

ANT M1 & M2, 100 MHz, MIMO, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-20.97	-5	-15.97
M1	100	L	1/0	36.99	-23.44	-13	-10.44
M2	100	L	1/0	37	-20.12	-5	-15.12
M2	100	L	1/0	36.99	-23.22	-13	-10.22
M1	100	L	66/0	37	-23.57	-5	-18.57
M1	100	L	66/0	36.99	-23.34	-13	-10.34
M2	100	L	66/0	37	-22.75	-5	-17.75
M2	100	L	66/0	36.99	-23.01	-13	-10.01
M1	100	H	1/66	40	-17.89	-5	-12.89
M1	100	H	1/66	40.01	-17.68	-13	-4.68
M2	100	H	1/66	40	-18.11	-5	-13.11
M2	100	H	1/66	40.01	-17.91	-13	-4.91
M1	100	H	66/0	40	-19.18	-5	-14.18
M1	100	H	66/0	40.01	-17.92	-13	-4.92
M2	100	H	66/0	40	-19.10	-5	-14.10
M2	100	H	66/0	40.01	-18.26	-13	-5.26

ANT M1 & M2, 100 MHz, MIMO, 1CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-15.43	-5	-10.43
M1	100	L	1/0	36.99	-23.02	-13	-10.02
M2	100	L	1/0	37	-17.17	-5	-12.17
M2	100	L	1/0	36.99	-23.02	-13	-10.02
M1	100	L	66/0	37	-22.50	-5	-17.50
M1	100	L	66/0	36.99	-22.66	-13	-9.66
M2	100	L	66/0	37	-21.29	-5	-16.29
M2	100	L	66/0	36.99	-22.06	-13	-9.06
M1	100	H	1/66	40	-15.71	-5	-10.71
M1	100	H	1/66	40.01	-18.32	-13	-5.32
M2	100	H	1/66	40	-15.25	-5	-10.25
M2	100	H	1/66	40.01	-18.13	-13	-5.13
M1	100	H	66/0	40	-18.47	-5	-13.47
M1	100	H	66/0	40.01	-18.47	-13	-5.47
M2	100	H	66/0	40	-18.30	-5	-13.30
M2	100	H	66/0	40.01	-18.18	-13	-5.18

ANT M1 & M2, 100 MHz, MIMO, 1CC, 64QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-18.81	-5	-13.81
M1	100	L	1/0	36.99	-22.65	-13	-9.65
M2	100	L	1/0	37	-18.27	-5	-13.27
M2	100	L	1/0	36.99	-22.53	-13	-9.53
M1	100	L	66/0	37	-22.60	-5	-17.60
M1	100	L	66/0	36.99	-22.49	-13	-9.49
M2	100	L	66/0	37	-22.15	-5	-17.15
M2	100	L	66/0	36.99	-22.91	-13	-9.91
M1	100	H	1/66	40	-15.94	-5	-10.94
M1	100	H	1/66	40.01	-18.51	-13	-5.51
M2	100	H	1/66	40	-16.67	-5	-11.67
M2	100	H	1/66	40.01	-18.55	-13	-5.55
M1	100	H	66/0	40	-18.82	-5	-13.82
M1	100	H	66/0	40.01	-17.95	-13	-4.95
M2	100	H	66/0	40	-18.51	-5	-13.51
M2	100	H	66/0	40.01	-18.00	-13	-5.00

8.3.4. BAND EDGE RESULTS n260 MIMO 2CC


ANT M1, 50 MHz, MIMO, 2CC, QPSK

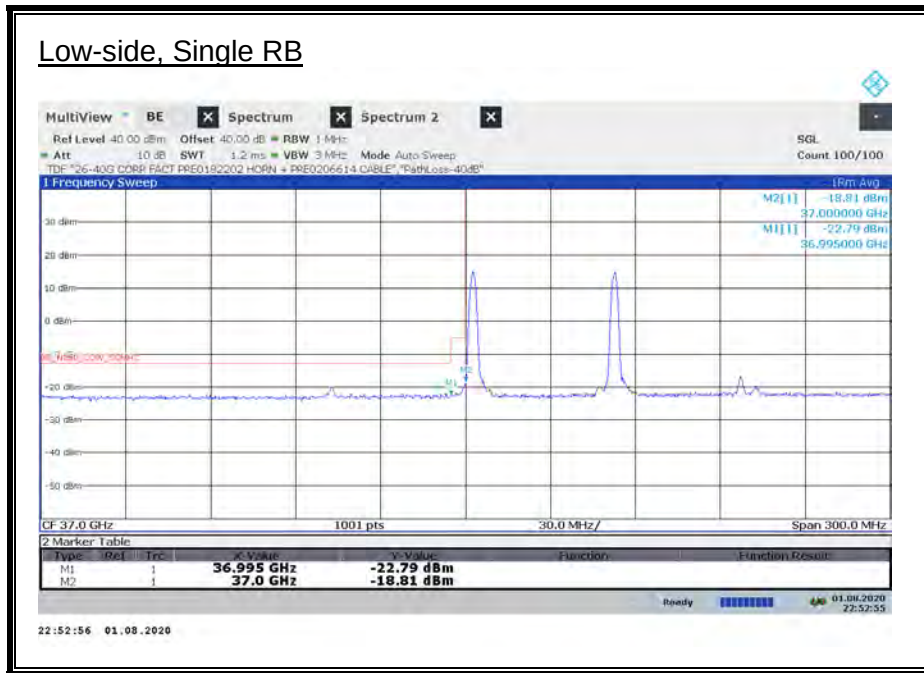

ANT M1, 50 MHz, MIMO, 2CC, QPSK

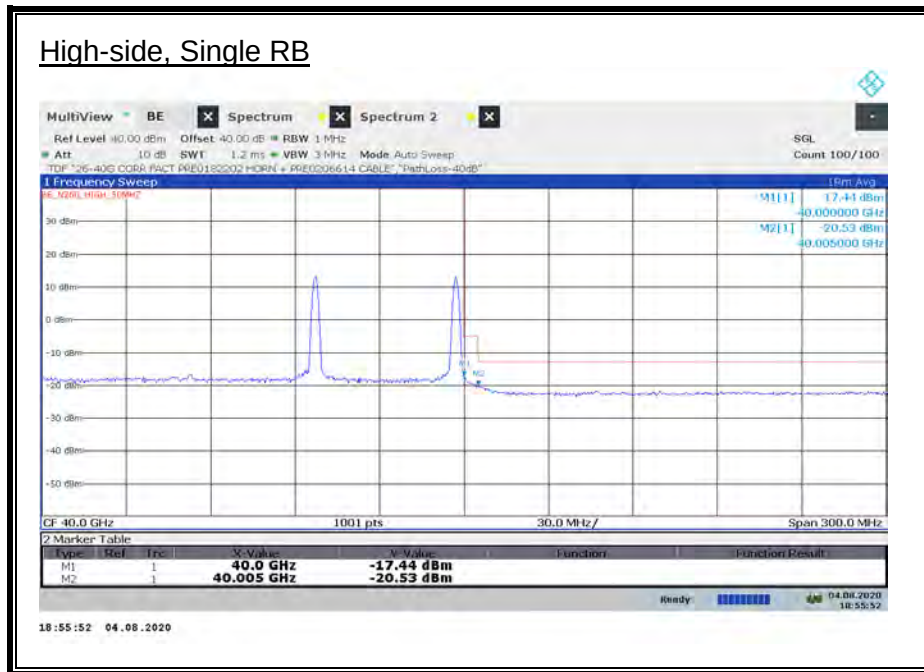

ANT M2, 50 MHz, MIMO, 2CC, QPSK

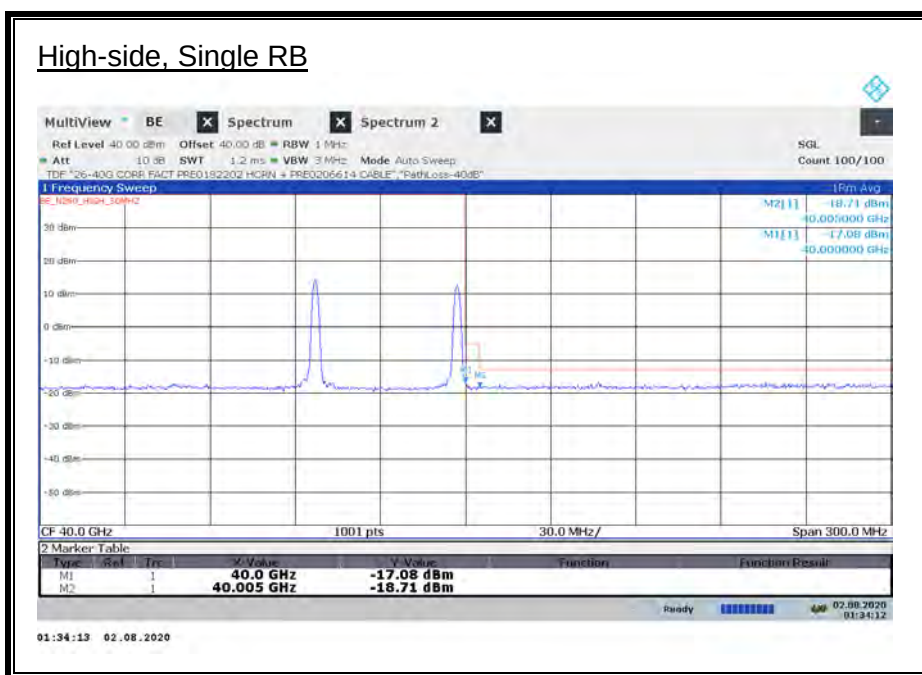

ANT M1 & M2, 50 MHz, MIMO, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-18.81	-5	-13.81
M1	50	L	1/0	36.995	-22.79	-13	-9.79
M2	50	L	1/0	37	-17.34	-5	-12.34
M2	50	L	1/0	36.995	-22.88	-13	-9.88
M1	50	H	1/32	40	-17.44	-5	-12.44
M1	50	H	1/32	40.005	-20.53	-13	-7.53
M2	50	H	1/32	40	-17.08	-5	-12.08
M2	50	H	1/32	40.005	-18.71	-13	-5.71

ANT M1 & M2, 50 MHz, MIMO, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-21.67	-5	-16.67
M1	50	L	1/0	36.995	-24.09	-13	-11.09
M2	50	L	1/0	37	-19.86	-5	-14.86
M2	50	L	1/0	36.995	-24.39	-13	-11.39
M1	50	H	1/32	40	-19.24	-5	-14.24
M1	50	H	1/32	40.005	-19.46	-13	-6.46
M2	50	H	1/32	40	-18.29	-5	-13.29
M2	50	H	1/32	40.005	-19.37	-13	-6.37

ANT M1 & M2, 50 MHz, MIMO, 2CC, 16QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-19.09	-5	-14.09
M1	50	L	1/0	36.995	-23.16	-13	-10.16
M2	50	L	1/0	37	-17.70	-5	-12.70
M2	50	L	1/0	36.995	-22.69	-13	-9.69
M1	50	H	1/32	40	-18.62	-5	-13.62
M1	50	H	1/32	40.005	-20.86	-13	-7.86
M2	50	H	1/32	40	-17.53	-5	-12.53
M2	50	H	1/32	40.005	-18.46	-13	-5.46


ANT M1 & M2, 50 MHz, MIMO, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-21.46	-5	-16.46
M1	50	L	1/0	36.995	-22.87	-13	-9.87
M2	50	L	1/0	37	-21.32	-5	-16.32
M2	50	L	1/0	36.995	-23.14	-13	-10.14
M1	50	H	1/32	40	-18.65	-5	-13.65
M1	50	H	1/32	40.005	-20.69	-13	-7.69
M2	50	H	1/32	40	-18.52	-5	-13.52
M2	50	H	1/32	40.005	-18.70	-13	-5.70

ANT M1, 100 MHz, MIMO, 2CC, QPSK




ANT M1, 100 MHz, MIMO, 2CC, QPSK

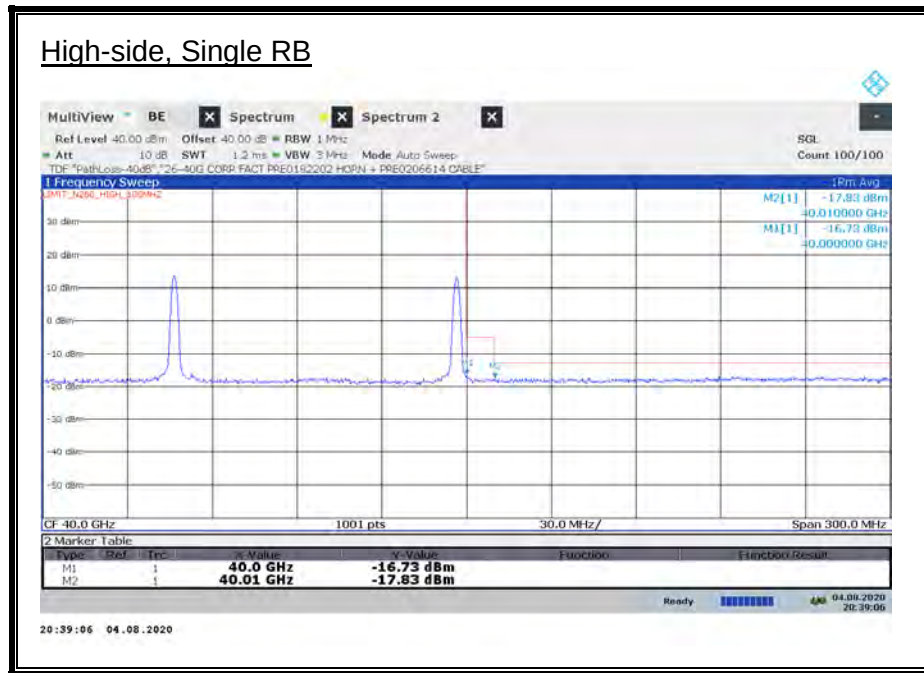

ANT M2, 100 MHz, MIMO, 2CC, QPSK



ANT M2, 100 MHz, MIMO, 2CC, QPSK

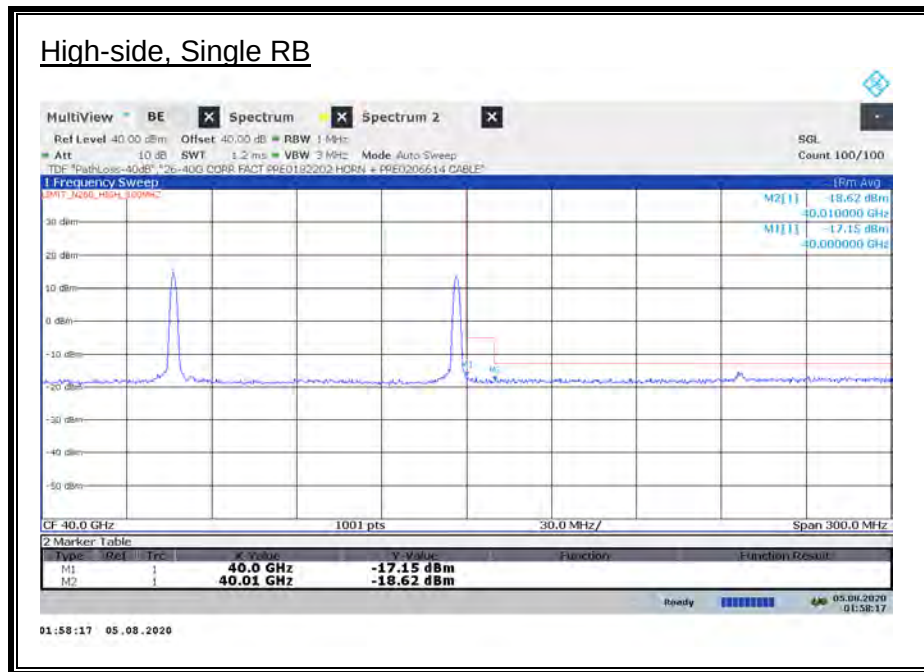

ANT M1 & M2, 100 MHz, MIMO, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-18.81	-5	-13.81
M1	100	L	1/0	36.99	-22.96	-13	-9.96
M2	100	L	1/0	37	-19.34	-5	-14.34
M2	100	L	1/0	36.99	-22.79	-13	-9.79
M1	100	H	1/66	40	-16.73	-5	-11.73
M1	100	H	1/66	40.01	-17.83	-13	-4.83
M2	100	H	1/66	40	-17.15	-5	-12.15
M2	100	H	1/66	40.01	-18.62	-13	-5.62

ANT M1 & M2, 100 MHz, MIMO, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-21.21	-5	-16.21
M1	100	L	1/0	36.99	-24.24	-13	-11.24
M2	100	L	1/0	37	-22.52	-5	-17.52
M2	100	L	1/0	36.99	-23.99	-13	-10.99
M1	100	H	1/66	40	-19.40	-5	-14.40
M1	100	H	1/66	40.01	-19.15	-13	-6.15
M2	100	H	1/66	40	-18.83	-5	-13.83
M2	100	H	1/66	40.01	-19.25	-13	-6.25

ANT M1 & M2, 100 MHz, MIMO, 2CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-19.64	-5	-14.64
M1	100	L	1/0	36.99	-23.46	-13	-10.46
M2	100	L	1/0	37	-20.18	-5	-15.18
M2	100	L	1/0	36.99	-23.09	-13	-10.09
M1	100	H	1/66	40	-17.15	-5	-12.15
M1	100	H	1/66	40.01	-18.46	-13	-5.46
M2	100	H	1/66	40	-17.51	-5	-12.51
M2	100	H	1/66	40.01	-18.05	-13	-5.05

ANT M1 & M2, 100 MHz, MIMO, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-21.81	-5	-16.81
M1	100	L	1/0	36.99	-23.67	-13	-10.67
M2	100	L	1/0	37	-22.05	-5	-17.05
M2	100	L	1/0	36.99	-23.24	-13	-10.24
M1	100	H	1/66	40	-18.35	-5	-13.35
M1	100	H	1/66	40.01	-18.80	-13	-5.80
M2	100	H	1/66	40	-18.52	-5	-13.52
M2	100	H	1/66	40.01	-18.91	-13	-5.91


8.3.5. BAND EDGE RESULTS n261 SISO-DUAL 1CC

ANT M1, 50 MHz, SISO-DUAL, 1CC, QPSK

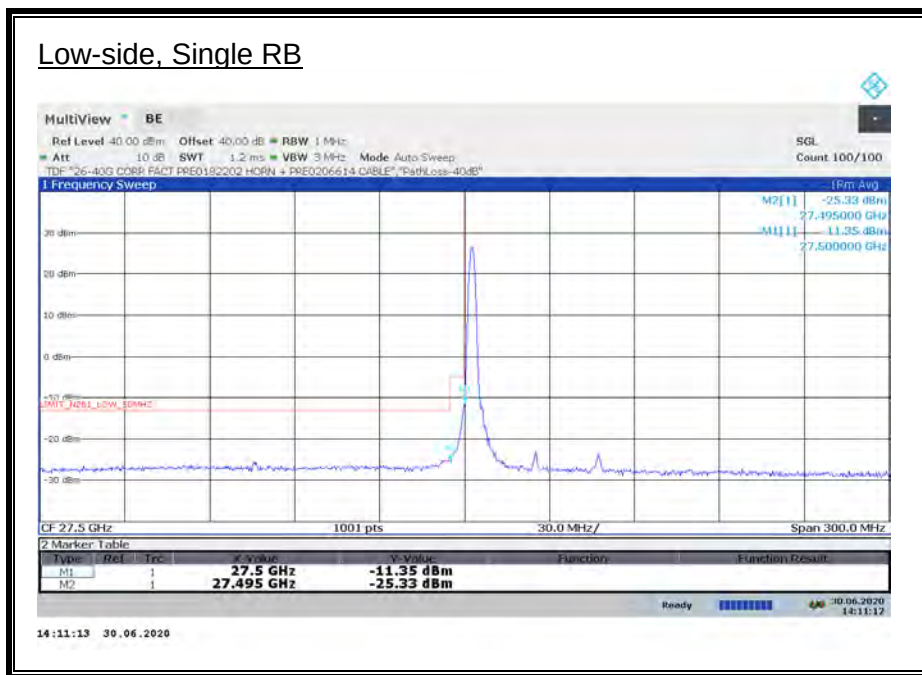


ANT M1, 50 MHz, SISO-DUAL, 1CC, QPSK



High-side, Single RB

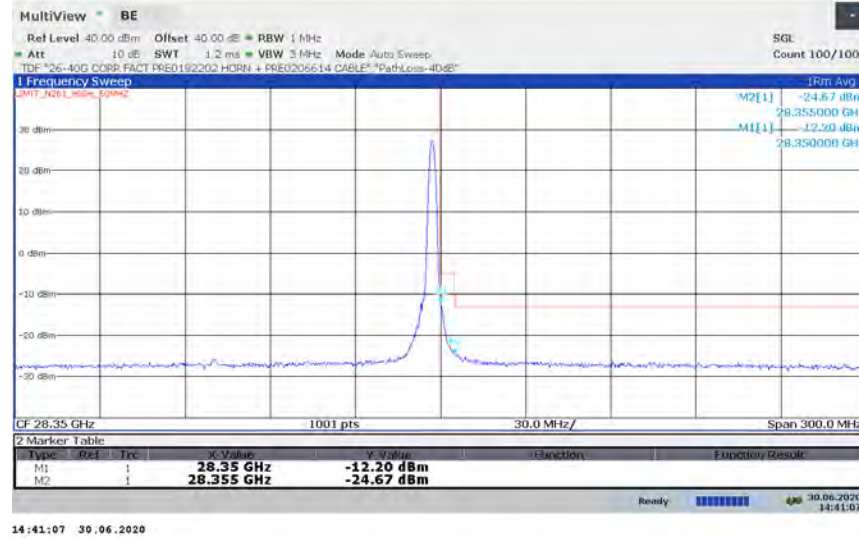



High-side, Full RB

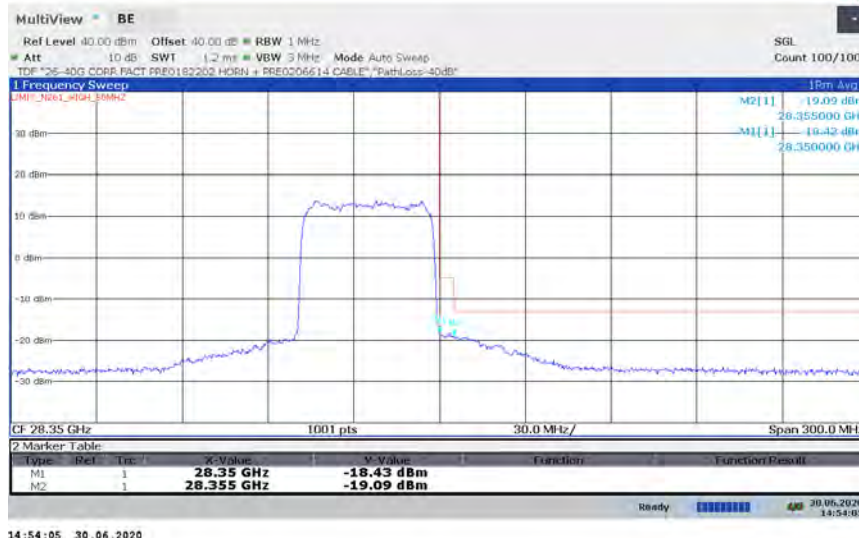

ANT M2, 50 MHz, SISO-DUAL, 1CC, QPSK

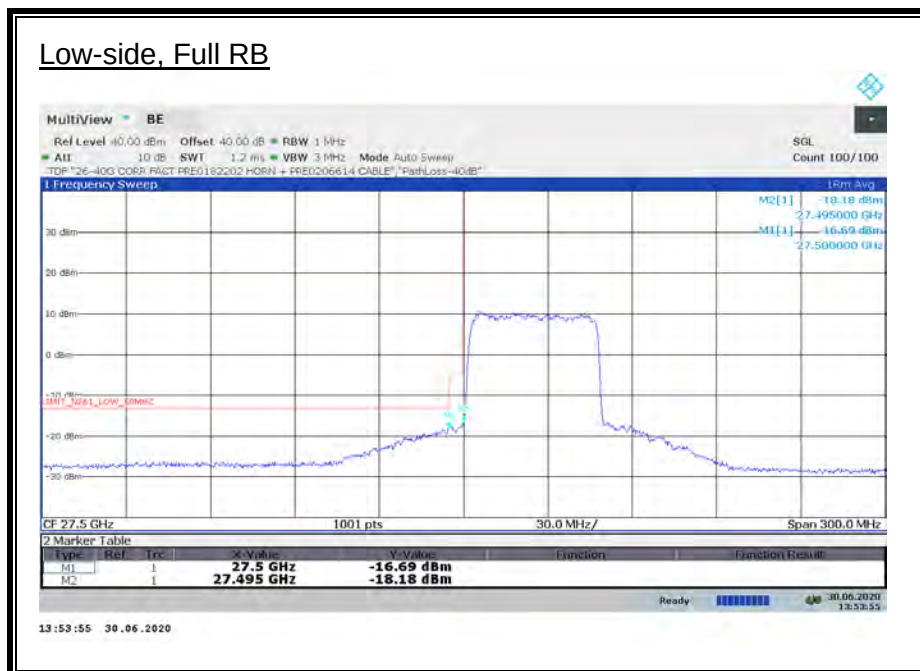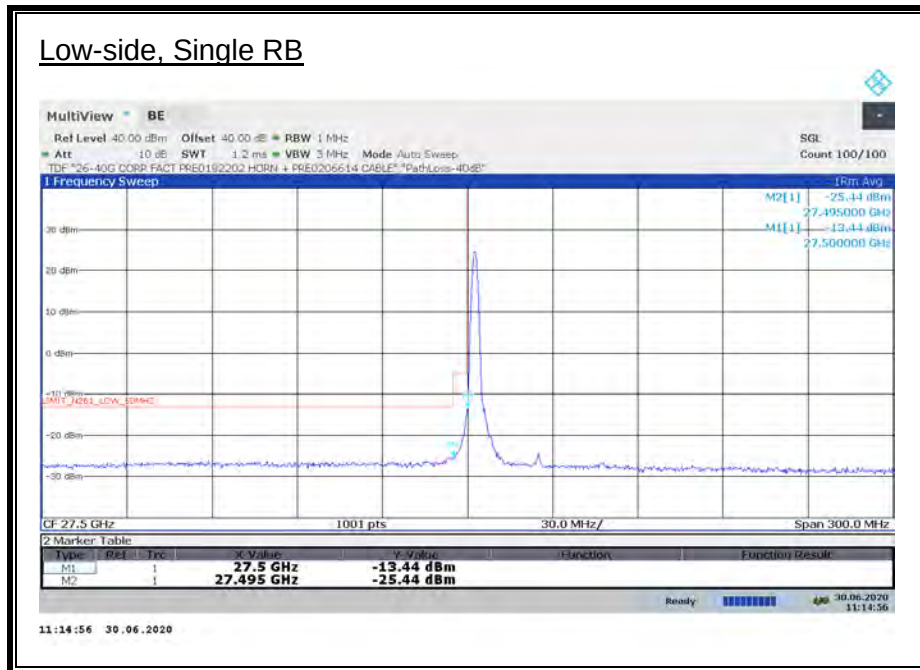

ANT M2, 50 MHz, SISO-DUAL, 1CC, QPSK

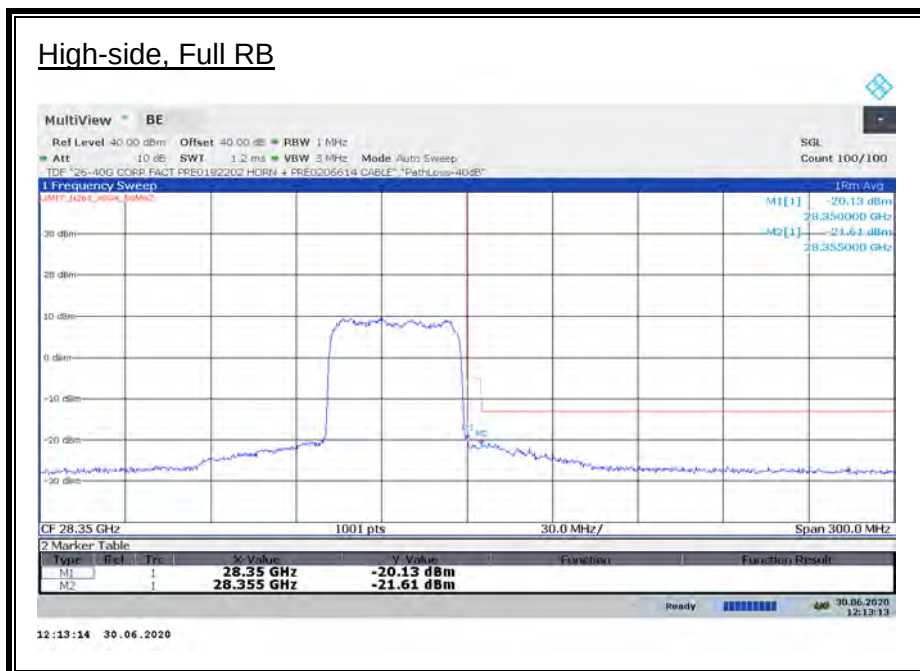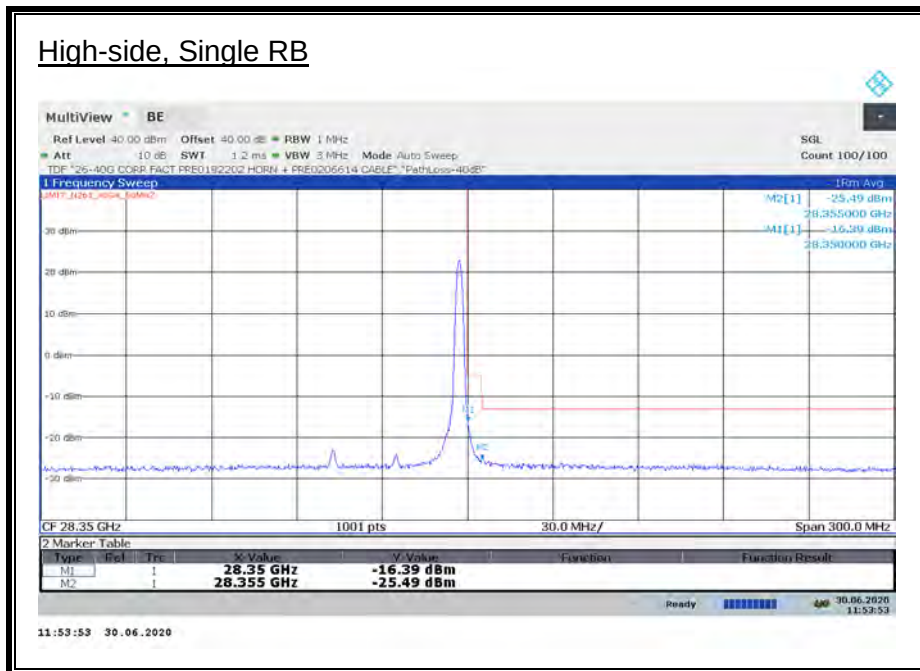

ANT M1 & M2, 50 MHz, SISO-DUAL, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-11.35	-5	-6.35
M1	50	L	1/0	27.495	-25.33	-13	-12.33
M2	50	L	1/0	27.5	-13.44	-5	-8.44
M2	50	L	1/0	27.495	-25.44	-13	-12.44
M1	50	L	32/0	27.5	-19.53	-5	-14.53
M1	50	L	32/0	27.495	-20.26	-13	-7.26
M2	50	L	32/0	27.5	-16.69	-5	-11.69
M2	50	L	32/0	27.495	-18.18	-13	-5.18
M1	50	H	1/32	28.35	-12.20	-5	-7.20
M1	50	H	1/32	28.355	-24.67	-13	-11.67
M2	50	H	1/32	28.35	-16.39	-5	-11.39
M2	50	H	1/32	28.355	-25.49	-13	-12.49
M1	50	H	32/0	28.35	-18.43	-5	-13.43
M1	50	H	32/0	28.355	-19.09	-13	-6.09
M2	50	H	32/0	28.35	-20.13	-5	-15.13
M2	50	H	32/0	28.355	-21.61	-13	-8.61

ANT M1 & M2, 50 MHz, SISO-DUAL, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-12.42	-5	-7.42
M1	50	L	1/0	27.495	-25.76	-13	-12.76
M2	50	L	1/0	27.5	-13.68	-5	-8.68
M2	50	L	1/0	27.495	-25.92	-13	-12.92
M1	50	L	32/0	27.5	-24.27	-5	-19.27
M1	50	L	32/0	27.495	-26.77	-13	-13.77
M2	50	L	32/0	27.5	-21.49	-5	-16.49
M2	50	L	32/0	27.495	-23.90	-13	-10.90
M1	50	H	1/32	28.35	-11.09	-5	-6.09
M1	50	H	1/32	28.355	-26.18	-13	-13.18
M2	50	H	1/32	28.35	-15.57	-5	-10.57
M2	50	H	1/32	28.355	-26.85	-13	-13.85
M1	50	H	32/0	28.35	-21.70	-5	-16.70
M1	50	H	32/0	28.355	-25.41	-13	-12.41
M2	50	H	32/0	28.35	-26.64	-5	-21.64
M2	50	H	32/0	28.355	-26.95	-13	-13.95

ANT M1 & M2, 50 MHz, SISO-DUAL, 1CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-13.11	-5	-8.11
M1	50	L	1/0	27.495	-25.67	-13	-12.67
M2	50	L	1/0	27.5	-16.51	-5	-11.51
M2	50	L	1/0	27.495	-26.67	-13	-13.67
M1	50	L	32/0	27.5	-21.38	-5	-16.38
M1	50	L	32/0	27.495	-21.85	-13	-8.85
M2	50	L	32/0	27.5	-20.51	-5	-15.51
M2	50	L	32/0	27.495	-22.67	-13	-9.67
M1	50	H	1/32	28.35	-13.61	-5	-8.61
M1	50	H	1/32	28.355	-24.60	-13	-11.60
M2	50	H	1/32	28.35	-18.29	-5	-13.29
M2	50	H	1/32	28.355	-26.24	-13	-13.24
M1	50	H	32/0	28.35	-21.43	-5	-16.43
M1	50	H	32/0	28.355	-22.87	-13	-9.87
M2	50	H	32/0	28.35	-22.39	-5	-17.39
M2	50	H	32/0	28.355	-23.99	-13	-10.99

ANT M1 & M2, 50 MHz, SISO-DUAL, 1CC, 64QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-14.46	-5	-9.46
M1	50	L	1/0	27.495	-25.99	-13	-12.99
M2	50	L	1/0	27.5	-18.03	-5	-13.03
M2	50	L	1/0	27.495	-26.25	-13	-13.25
M1	50	L	32/0	27.5	-22.26	-5	-17.26
M1	50	L	32/0	27.495	-23.53	-13	-10.53
M2	50	L	32/0	27.5	-23.41	-5	-18.41
M2	50	L	32/0	27.495	-24.52	-13	-11.52
M1	50	H	1/32	28.35	-16.27	-5	-11.27
M1	50	H	1/32	28.355	-25.70	-13	-12.70
M2	50	H	1/32	28.35	-19.51	-5	-14.51
M2	50	H	1/32	28.355	-25.98	-13	-12.98
M1	50	H	32/0	28.35	-22.90	-5	-17.90
M1	50	H	32/0	28.355	-24.77	-13	-11.77
M2	50	H	32/0	28.35	-23.64	-5	-18.64
M2	50	H	32/0	28.355	-24.45	-13	-11.45

ANT M1, 100 MHz, SISO-DUAL, 1CC, QPSK


Low-side, Single RB

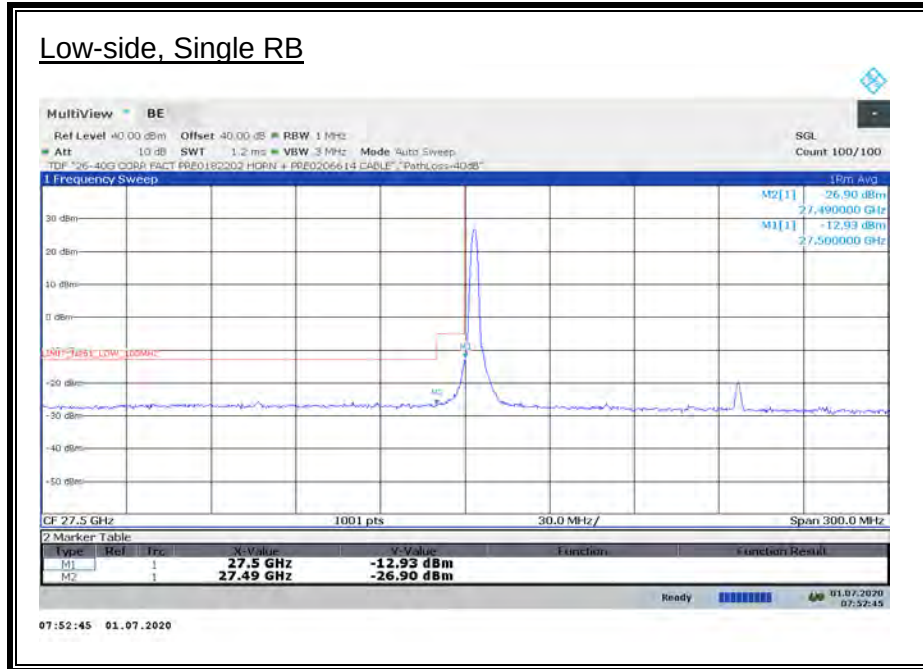

Low-side, Full RB

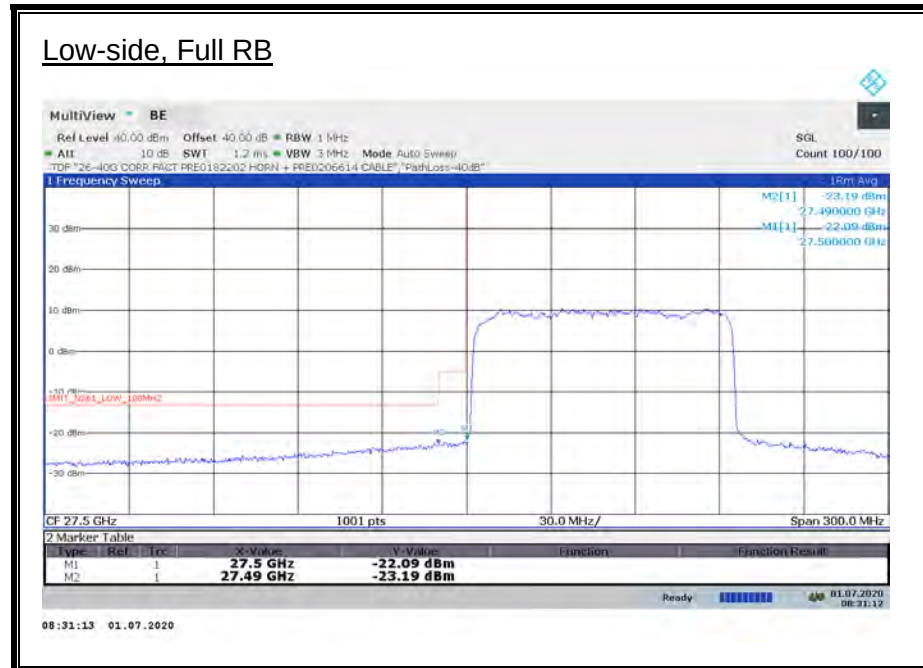


ANT M1, 100 MHz, SISO-DUAL, 1CC, QPSK

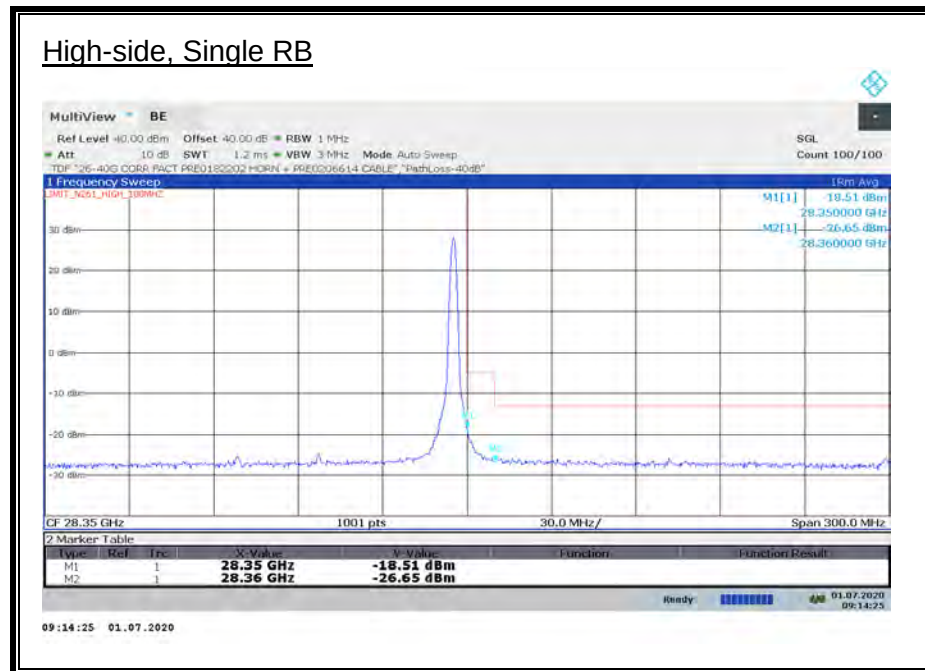

ANT M2, 100 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

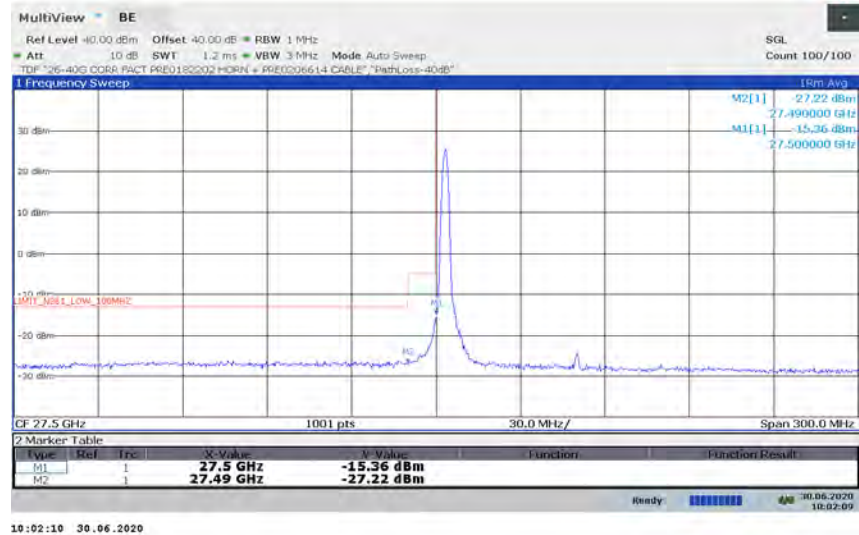


Low-side, Full RB



ANT M2, 100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

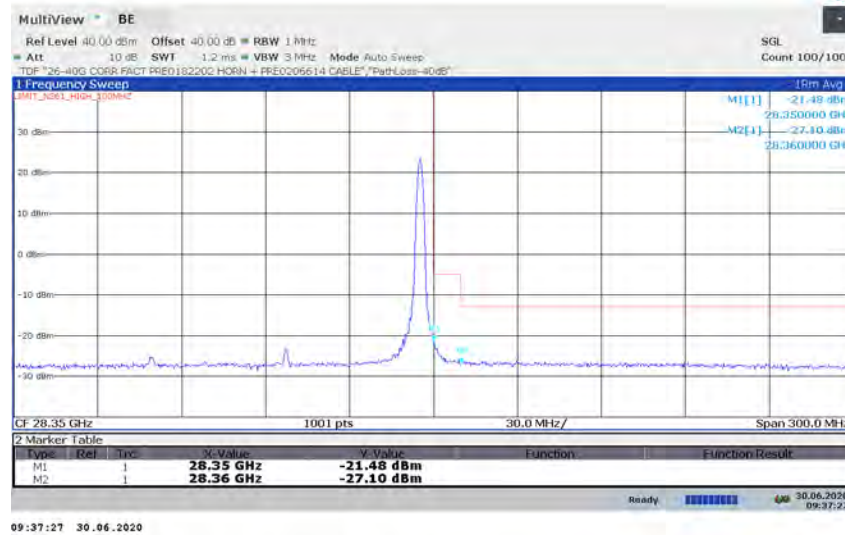

High-side, Full RB



ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-12.93	-5	-7.93
M1	100	L	1/0	27.49	-26.90	-13	-13.90
M2	100	L	1/0	27.5	-15.36	-5	-10.36
M2	100	L	1/0	27.49	-27.22	-13	-14.22
M1	100	L	64/0	27.5	-22.09	-5	-17.09
M1	100	L	64/0	27.49	-23.19	-13	-10.19
M2	100	L	64/0	27.5	-19.82	-5	-14.82
M2	100	L	64/0	27.49	-20.95	-13	-7.95
M1	100	H	1/64	28.35	-18.51	-5	-13.51
M1	100	H	1/64	28.36	-26.65	-13	-13.65
M2	100	H	1/64	28.35	-21.48	-5	-16.48
M2	100	H	1/64	28.36	-27.10	-13	-14.10
M1	100	H	64/0	28.35	-21.75	-5	-16.75
M1	100	H	64/0	28.36	-22.27	-13	-9.27
M2	100	H	64/0	28.35	-22.96	-5	-17.96
M2	100	H	64/0	28.36	-23.64	-13	-10.64

ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-10.32	-5	-5.32
M1	100	L	1/0	27.49	-27.14	-13	-14.14
M2	100	L	1/0	27.5	-12.16	-5	-7.16
M2	100	L	1/0	27.49	-26.60	-13	-13.60
M1	100	L	64/0	27.5	-23.23	-5	-18.23
M1	100	L	64/0	27.49	-25.80	-13	-12.80
M2	100	L	64/0	27.5	-21.15	-5	-16.15
M2	100	L	64/0	27.49	-24.67	-13	-11.67
M1	100	H	1/64	28.35	-17.41	-5	-12.41
M1	100	H	1/64	28.36	-27.40	-13	-14.40
M2	100	H	1/64	28.35	-21.84	-5	-16.84
M2	100	H	1/64	28.36	-27.52	-13	-14.52
M1	100	H	64/0	28.35	-24.91	-5	-19.91
M1	100	H	64/0	28.36	-26.48	-13	-13.48
M2	100	H	64/0	28.35	-26.66	-5	-21.66
M2	100	H	64/0	28.36	-27.29	-13	-14.29

ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-13.51	-5	-8.51
M1	100	L	1/0	27.49	-26.61	-13	-13.61
M2	100	L	1/0	27.5	-17.37	-5	-12.37
M2	100	L	1/0	27.49	-27.20	-13	-14.20
M1	100	L	64/0	27.5	-23.66	-5	-18.66
M1	100	L	64/0	27.49	-24.24	-13	-11.24
M2	100	L	64/0	27.5	-22.67	-5	-17.67
M2	100	L	64/0	27.49	-23.57	-13	-10.57
M1	100	H	1/64	28.35	-20.71	-5	-15.71
M1	100	H	1/64	28.36	-26.94	-13	-13.94
M2	100	H	1/64	28.35	-23.23	-5	-18.23
M2	100	H	1/64	28.36	-27.12	-13	-14.12
M1	100	H	64/0	28.35	-23.93	-5	-18.93
M1	100	H	64/0	28.36	-24.14	-13	-11.14
M2	100	H	64/0	28.35	-24.67	-5	-19.67
M2	100	H	64/0	28.36	-25.05	-13	-12.05

ANT M1 & M2, 100 MHz, SISO-DUAL, 1CC, 64QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-15.67	-5	-10.67
M1	100	L	1/0	27.49	-27.04	-13	-14.04
M2	100	L	1/0	27.5	-19.63	-5	-14.63
M2	100	L	1/0	27.49	-27.13	-13	-14.13
M1	100	L	64/0	27.5	-24.60	-5	-19.60
M1	100	L	64/0	27.49	-25.31	-13	-12.31
M2	100	L	64/0	27.5	-24.72	-5	-19.72
M2	100	L	64/0	27.49	-25.08	-13	-12.08
M1	100	H	1/64	28.35	-21.59	-5	-16.59
M1	100	H	1/64	28.36	-26.88	-13	-13.88
M2	100	H	1/64	28.35	-24.72	-5	-19.72
M2	100	H	1/64	28.36	-27.10	-13	-14.10
M1	100	H	64/0	28.35	-25.79	-5	-20.79
M1	100	H	64/0	28.36	-25.92	-13	-12.92
M2	100	H	64/0	28.35	-25.03	-5	-20.03
M2	100	H	64/0	28.36	-25.21	-13	-12.21

8.3.6. BAND EDGE RESULTS n261 SISO-DUAL 2CC


ANT M1, 50 MHz, SISO-DUAL, 2CC, QPSK

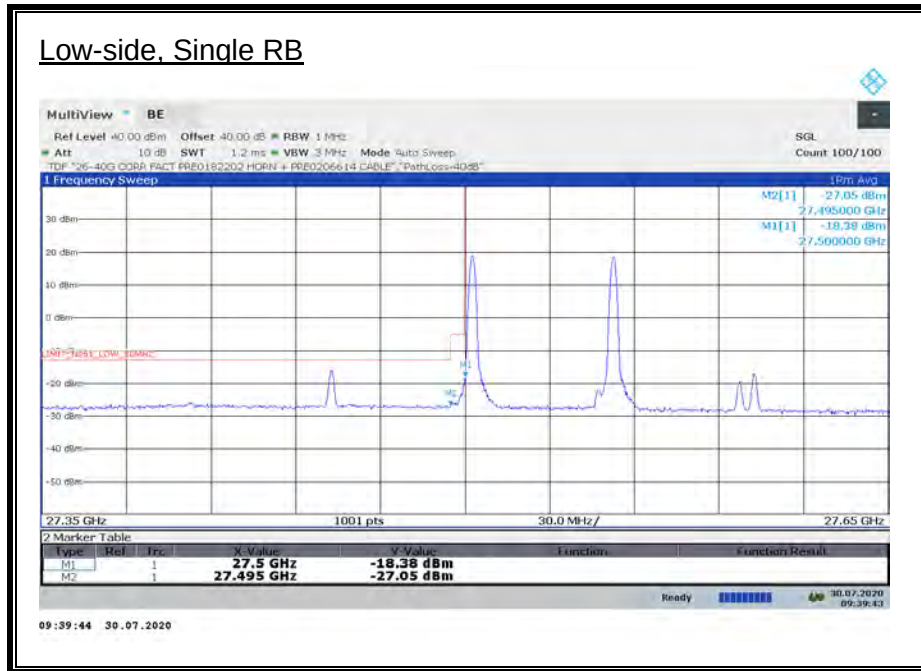


ANT M1, 50 MHz, SISO-DUAL, 2CC, QPSK

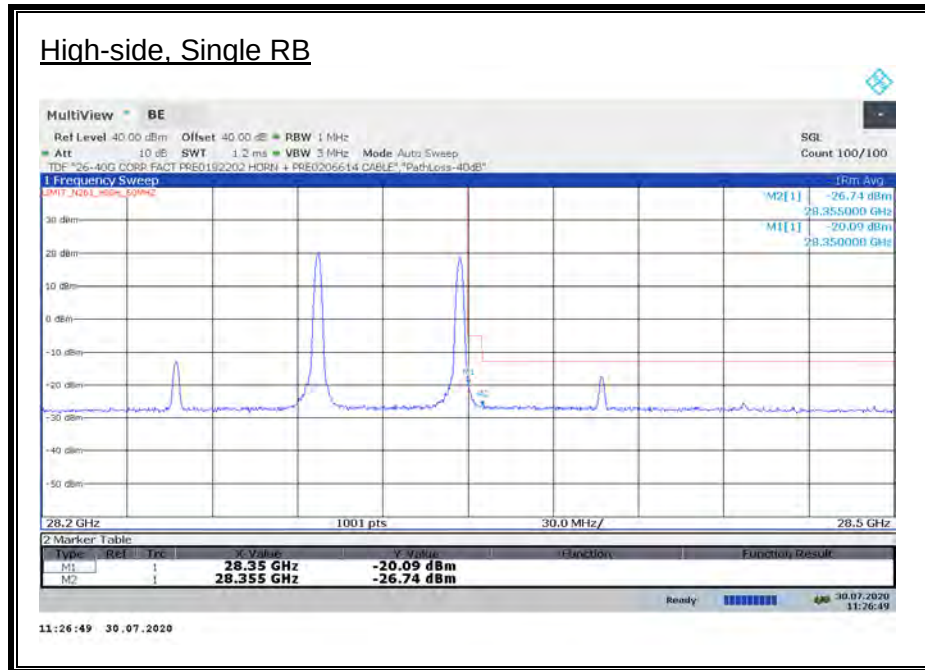

ANT M2, 50 MHz, SISO-DUAL, 2CC, QPSK

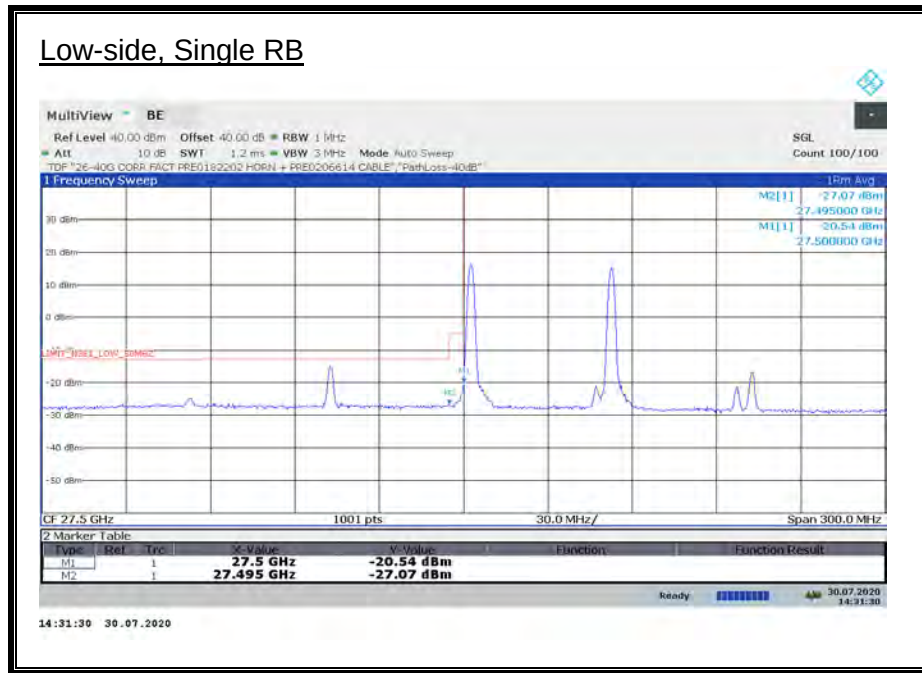

ANT M2, 50 MHz, SISO-DUAL, 2CC, QPSK

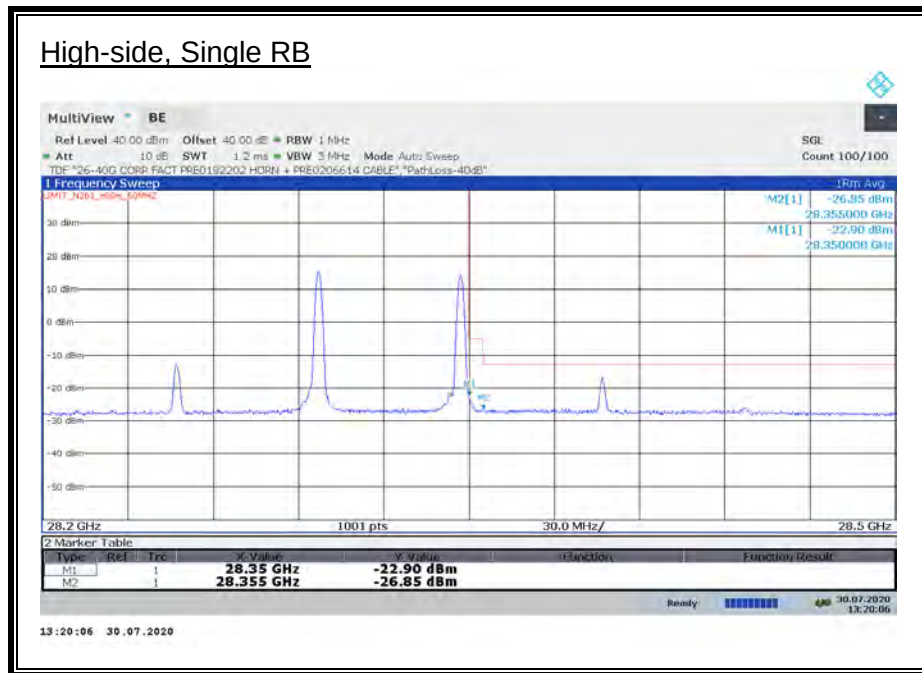

ANT M1 & M2, 50 MHz, SISO-DUAL, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-18.38	-5	-13.38
M1	50	L	1/0	27.495	-27.05	-13	-14.05
M2	50	L	1/0	27.5	-20.54	-5	-15.54
M2	50	L	1/0	27.495	-27.07	-13	-14.07
M1	50	H	1/32	28.35	-20.09	-5	-15.09
M1	50	H	1/32	28.355	-26.74	-13	-13.74
M2	50	H	1/32	28.35	-22.90	-5	-17.90
M2	50	H	1/32	28.355	-26.85	-13	-13.85

ANT M1 & M2, 50 MHz, SISO-DUAL, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-18.30	-5	-13.30
M1	50	L	1/0	27.495	-21.92	-13	-8.92
M2	50	L	1/0	27.5	-19.25	-5	-14.25
M2	50	L	1/0	27.495	-21.10	-13	-8.10
M1	50	H	1/32	28.35	-19.90	-5	-14.90
M1	50	H	1/32	28.355	-21.94	-13	-8.94
M2	50	H	1/32	28.35	-20.36	-5	-15.36
M2	50	H	1/32	28.355	-21.91	-13	-8.91


ANT M1 & M2, 50 MHz, SISO-DUAL, 2CC, 16QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-19.87	-5	-14.87
M1	50	L	1/0	27.495	-26.44	-13	-13.44
M2	50	L	1/0	27.5	-22.49	-5	-17.49
M2	50	L	1/0	27.495	-27.47	-13	-14.47
M1	50	H	1/32	28.35	-22.01	-5	-17.01
M1	50	H	1/32	28.355	-26.72	-13	-13.72
M2	50	H	1/32	28.35	-23.72	-5	-18.72
M2	50	H	1/32	28.355	-27.19	-13	-14.19


ANT M1 & M2, 50 MHz, SISO-DUAL, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-23.02	-5	-18.02
M1	50	L	1/0	27.495	-28.04	-13	-15.04
M2	50	L	1/0	27.5	-23.82	-5	-18.82
M2	50	L	1/0	27.495	-27.20	-13	-14.20
M1	50	H	1/32	28.35	-23.22	-5	-18.22
M1	50	H	1/32	28.355	-26.74	-13	-13.74
M2	50	H	1/32	28.35	-25.86	-5	-20.86
M2	50	H	1/32	28.355	-26.42	-13	-13.42

ANT M1, 100 MHz, SISO-DUAL, 2CC, QPSK

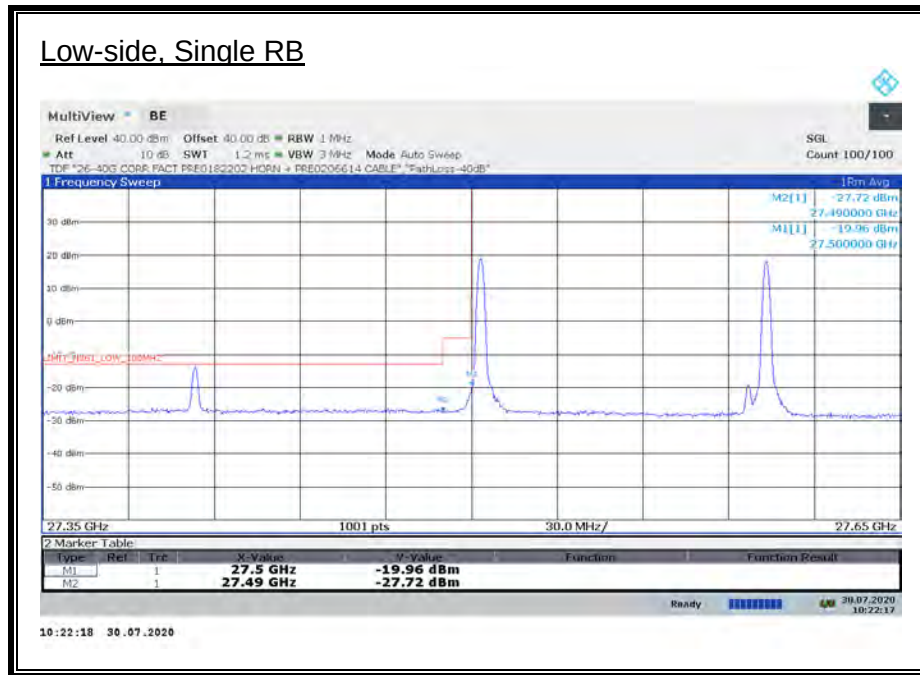


ANT M1, 100 MHz, SISO-DUAL, 2CC, QPSK

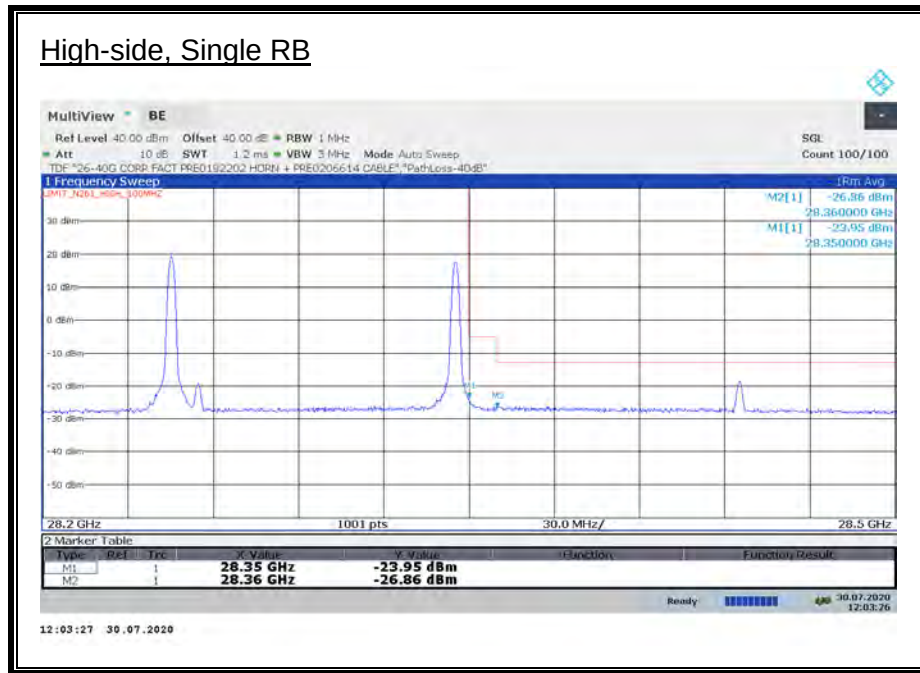


ANT M2, 100 MHz, SISO-DUAL, 2CC, QPSK

Low-side, Single RB

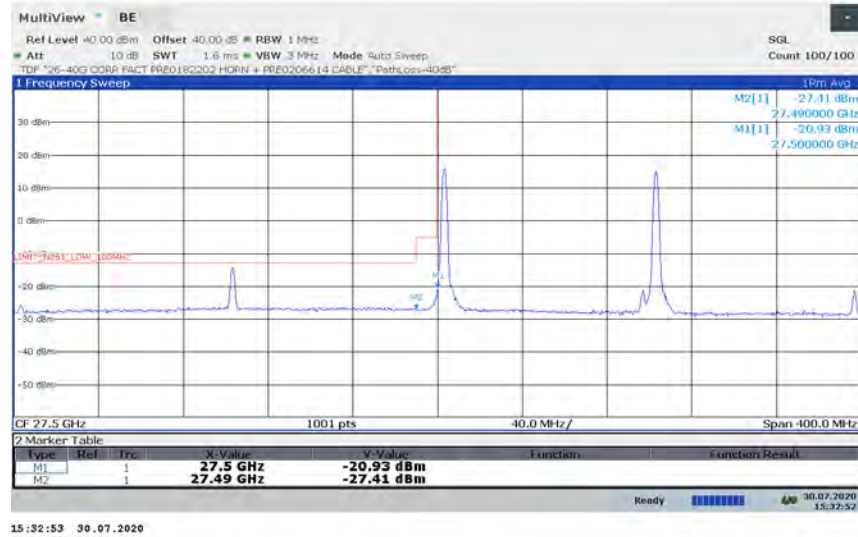

ANT M2, 100 MHz, SISO-DUAL, 2CC, QPSK

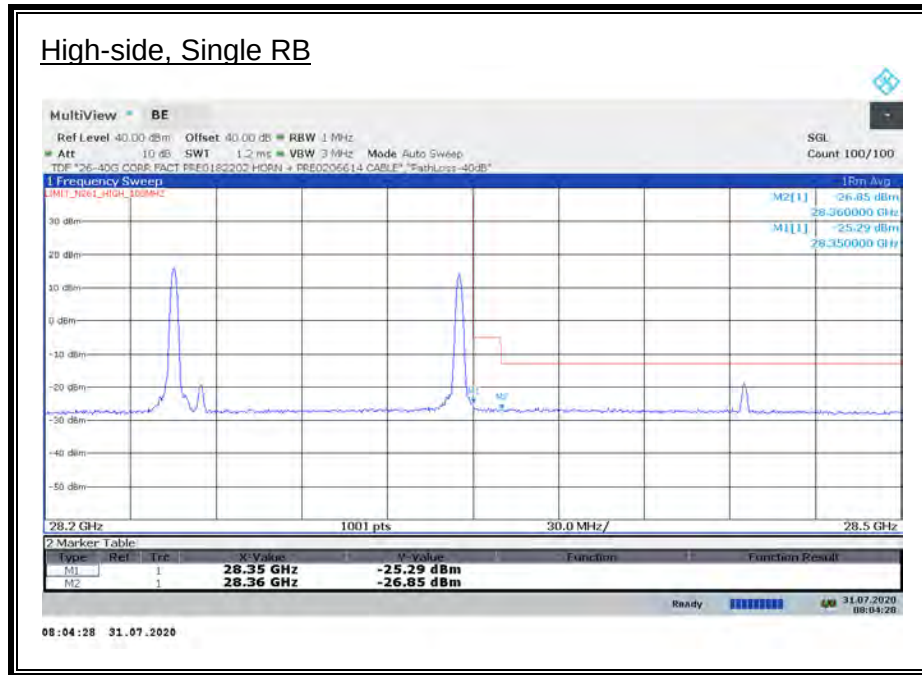

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-19.96	-5	-14.96
M1	100	L	1/0	27.49	-27.72	-13	-14.72
M2	100	L	1/0	27.5	-20.93	-5	-15.93
M2	100	L	1/0	27.49	-27.41	-13	-14.41
M1	100	H	1/64	28.35	-23.95	-5	-18.95
M1	100	H	1/64	28.36	-26.86	-13	-13.86
M2	100	H	1/64	28.35	-25.29	-5	-20.29
M2	100	H	1/64	28.36	-26.85	-13	-13.85

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-19.68	-5	-14.68
M1	100	L	1/0	27.49	-21.99	-13	-8.99
M2	100	L	1/0	27.5	-19.66	-5	-14.66
M2	100	L	1/0	27.49	-21.77	-13	-8.77
M1	100	H	1/64	28.35	-21.50	-5	-16.50
M1	100	H	1/64	28.36	-22.64	-13	-9.64
M2	100	H	1/64	28.35	-21.76	-5	-16.76
M2	100	H	1/64	28.36	-22.42	-13	-9.42

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, 16QAM



Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-21.56	-5	-16.56
M1	100	L	1/0	27.49	-26.93	-13	-13.93
M2	100	L	1/0	27.5	-23.16	-5	-18.16
M2	100	L	1/0	27.49	-27.16	-13	-14.16
M1	100	H	1/64	28.35	-25.11	-5	-20.11
M1	100	H	1/64	28.36	-27.21	-13	-14.21
M2	100	H	1/64	28.35	-26.00	-5	-21.00
M2	100	H	1/64	28.36	-27.28	-13	-14.28

ANT M1 & M2, 100 MHz, SISO-DUAL, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-24.31	-5	-19.31
M1	100	L	1/0	27.49	-26.86	-13	-13.86
M2	100	L	1/0	27.5	-25.49	-5	-20.49
M2	100	L	1/0	27.49	-26.69	-13	-13.69
M1	100	H	1/64	28.35	-26.87	-5	-21.87
M1	100	H	1/64	28.36	-26.75	-13	-13.75
M2	100	H	1/64	28.35	-26.60	-5	-21.60
M2	100	H	1/64	28.36	-26.96	-13	-13.96


8.3.7. BAND EDGE RESULTS n261 MIMO 1CC

ANT M1, 50 MHz, MIMO, 1CC, QPSK

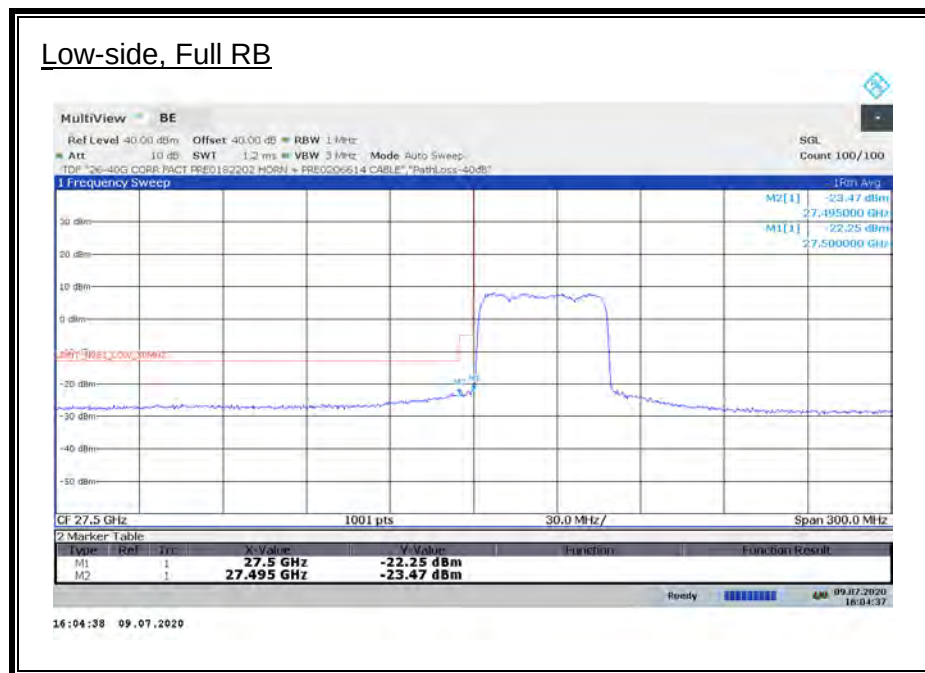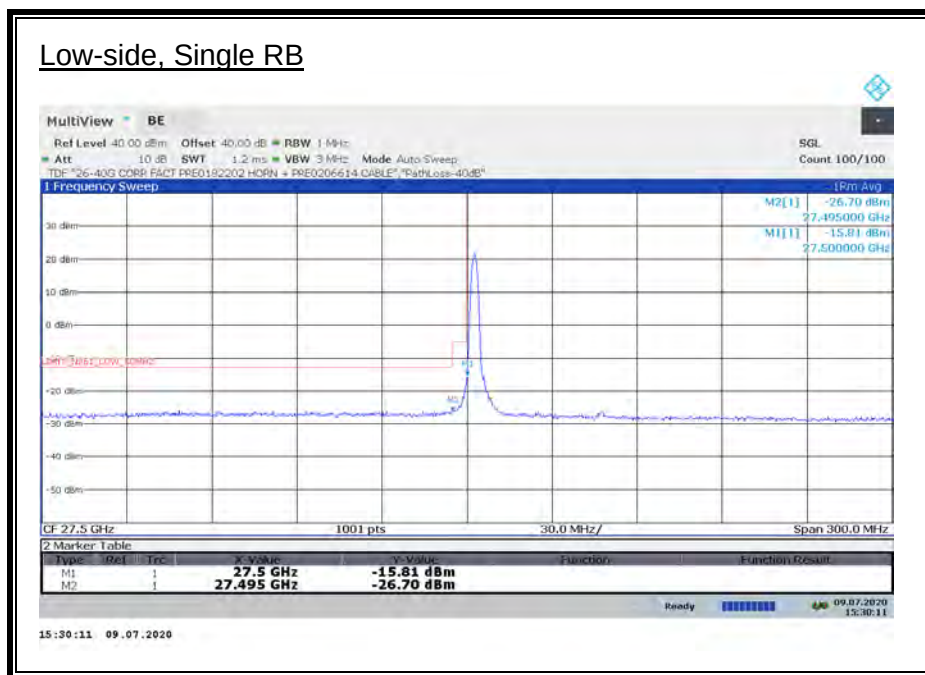


ANT M1, 50 MHz, MIMO, 1CC, QPSK

High-side, Single RB

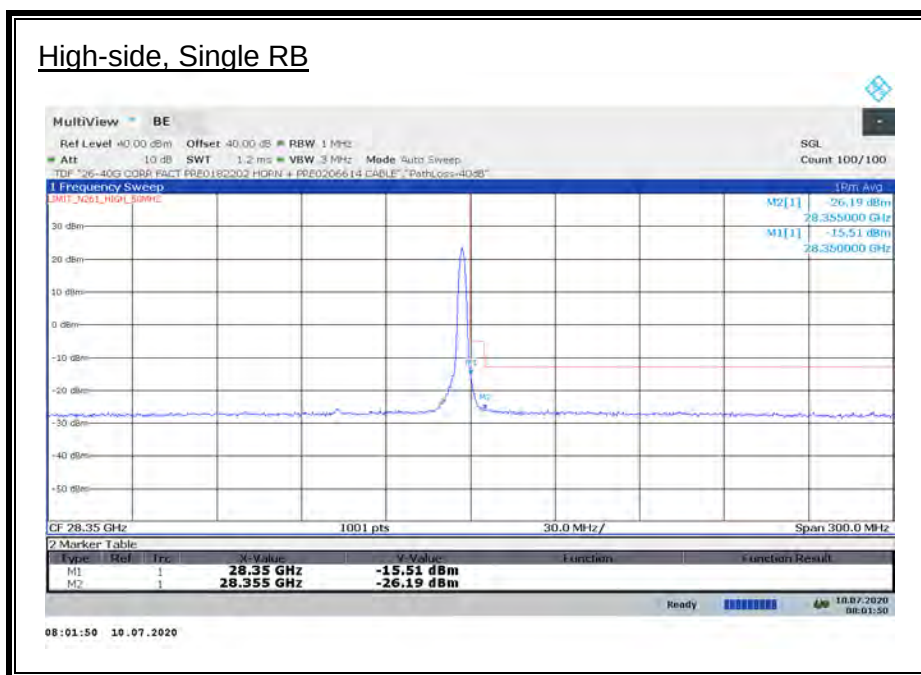


High-side, Full RB

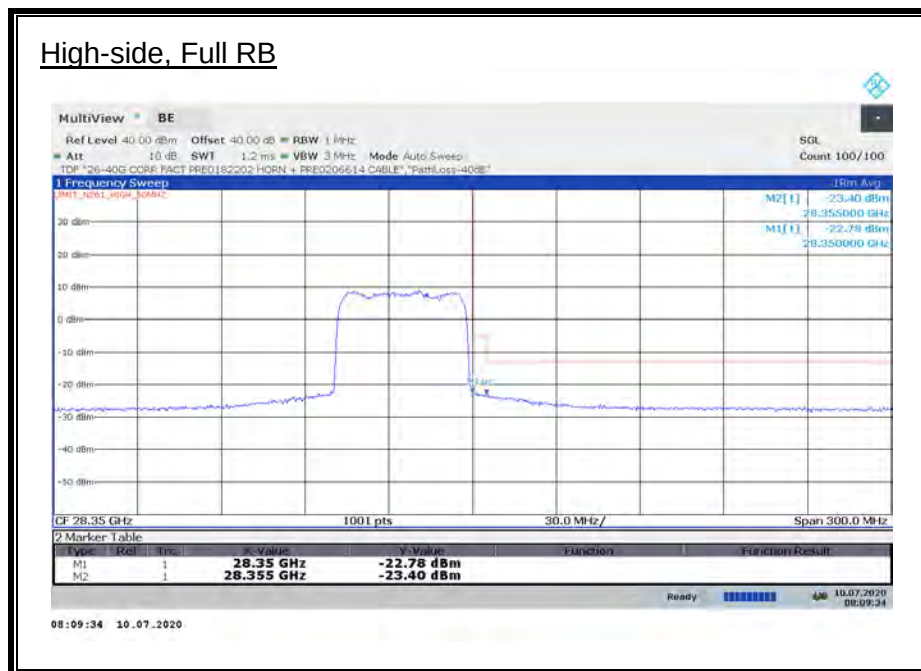

ANT M2, 50 MHz, MIMO, 1CC, QPSK

Low-side, Single RB

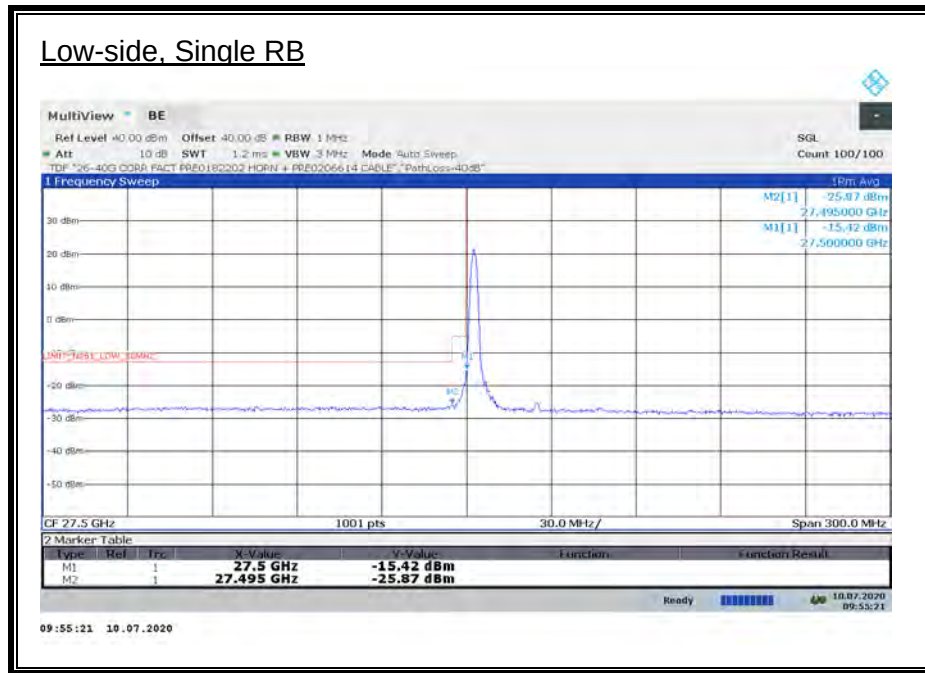


Low-side, Full RB



ANT M2, 50 MHz, MIMO, 1CC, QPSK

High-side, Single RB

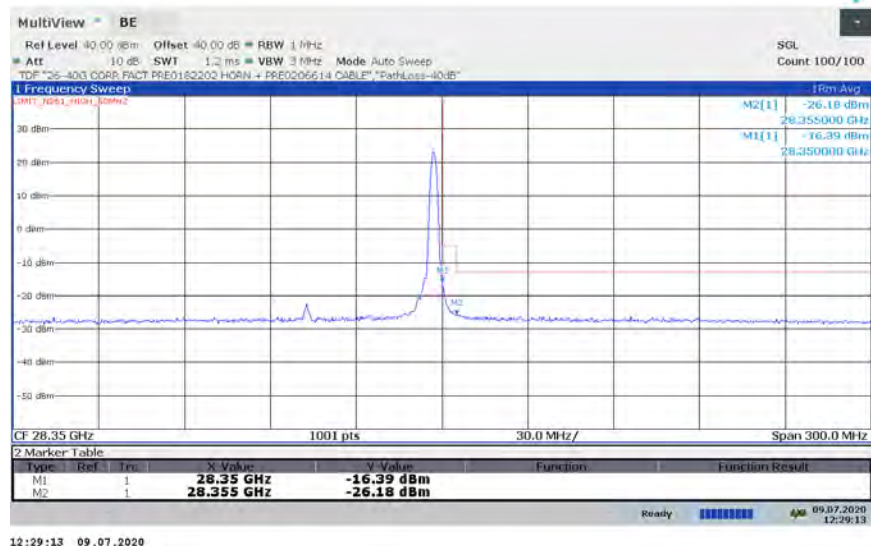

High-side, Full RB



ANT M1 & M2, 50 MHz, MIMO, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-15.81	-5	-10.81
M1	50	L	1/0	27.495	-26.70	-13	-13.70
M2	50	L	1/0	27.5	-15.24	-5	-10.24
M2	50	L	1/0	27.495	-25.87	-13	-12.87
M1	50	L	32/0	27.5	-22.25	-5	-17.25
M1	50	L	32/0	27.495	-23.47	-13	-10.47
M2	50	L	32/0	27.5	-20.59	-5	-15.59
M2	50	L	32/0	27.495	-21.49	-13	-8.49
M1	50	H	1/32	28.35	-15.51	-5	-10.51
M1	50	H	1/32	28.355	-26.19	-13	-13.19
M2	50	H	1/32	28.35	-16.39	-5	-11.39
M2	50	H	1/32	28.355	-26.18	-13	-13.18
M1	50	H	32/0	28.35	-22.78	-5	-17.78
M1	50	H	32/0	28.355	-23.40	-13	-10.40
M2	50	H	32/0	28.35	-20.22	-5	-15.22
M2	50	H	32/0	28.355	-21.71	-13	-8.71

ANT M1 & M2, 50 MHz, MIMO, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-17.98	-5	-12.98
M1	50	L	1/0	27.495	-27.04	-13	-14.04
M2	50	L	1/0	27.5	-15.77	-5	-10.77
M2	50	L	1/0	27.495	-26.41	-13	-13.41
M1	50	L	32/0	27.5	-24.25	-5	-19.25
M1	50	L	32/0	27.495	-25.30	-13	-12.30
M2	50	L	32/0	27.5	-23.04	-5	-18.04
M2	50	L	32/0	27.495	-23.97	-13	-10.97
M1	50	H	1/32	28.35	-19.92	-5	-14.92
M1	50	H	1/32	28.355	-27.09	-13	-14.09
M2	50	H	1/32	28.35	-19.08	-5	-14.08
M2	50	H	1/32	28.355	-27.58	-13	-14.58
M1	50	H	32/0	28.35	-24.80	-5	-19.80
M1	50	H	32/0	28.355	-25.65	-13	-12.65
M2	50	H	32/0	28.35	-23.93	-5	-18.93
M2	50	H	32/0	28.355	-25.27	-13	-12.27

ANT M1 & M2, 50 MHz, MIMO, 1CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-17.01	-5	-12.01
M1	50	L	1/0	27.495	-26.03	-13	-13.03
M2	50	L	1/0	27.5	-17.66	-5	-12.66
M2	50	L	1/0	27.495	-26.61	-13	-13.61
M1	50	L	32/0	27.5	-23.26	-5	-18.26
M1	50	L	32/0	27.495	-23.95	-13	-10.95
M2	50	L	32/0	27.5	-22.32	-5	-17.32
M2	50	L	32/0	27.495	-23.85	-13	-10.85
M1	50	H	1/32	28.35	-18.40	-5	-13.40
M1	50	H	1/32	28.355	-27.02	-13	-14.02
M2	50	H	1/32	28.35	-19.47	-5	-14.47
M2	50	H	1/32	28.355	-26.35	-13	-13.35
M1	50	H	32/0	28.35	-23.60	-5	-18.60
M1	50	H	32/0	28.355	-24.52	-13	-11.52
M2	50	H	32/0	28.35	-22.04	-5	-17.04
M2	50	H	32/0	28.355	-23.29	-13	-10.29

ANT M1 & M2, 50 MHz, MIMO, 1CC, 64QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-19.59	-5	-14.59
M1	50	L	1/0	27.495	-27.07	-13	-14.07
M2	50	L	1/0	27.5	-20.77	-5	-15.77
M2	50	L	1/0	27.495	-27.25	-13	-14.25
M1	50	L	32/0	27.5	-24.90	-5	-19.90
M1	50	L	32/0	27.495	-25.44	-13	-12.44
M2	50	L	32/0	27.5	-23.75	-5	-18.75
M2	50	L	32/0	27.495	-24.84	-13	-11.84
M1	50	H	1/32	28.35	-20.42	-5	-15.42
M1	50	H	1/32	28.355	-26.89	-13	-13.89
M2	50	H	1/32	28.35	-22.09	-5	-17.09
M2	50	H	1/32	28.355	-26.73	-13	-13.73
M1	50	H	32/0	28.35	-25.65	-5	-20.65
M1	50	H	32/0	28.355	-25.78	-13	-12.78
M2	50	H	32/0	28.35	-23.85	-5	-18.85
M2	50	H	32/0	28.355	-25.19	-13	-12.19

ANT M1, 100 MHz, MIMO, 1CC, QPSK

Low-side, Single RB

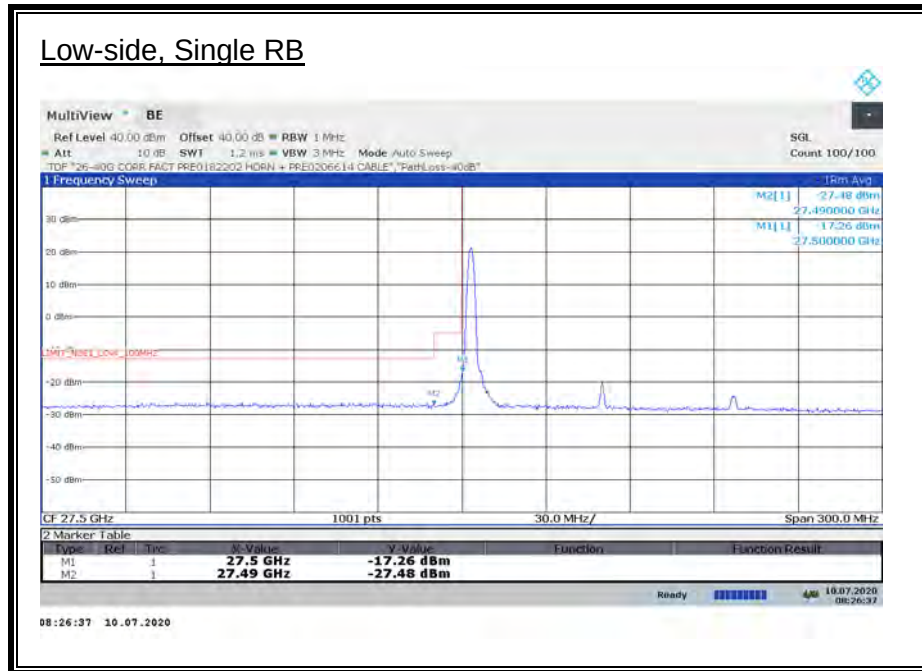


Low-side, Full RB

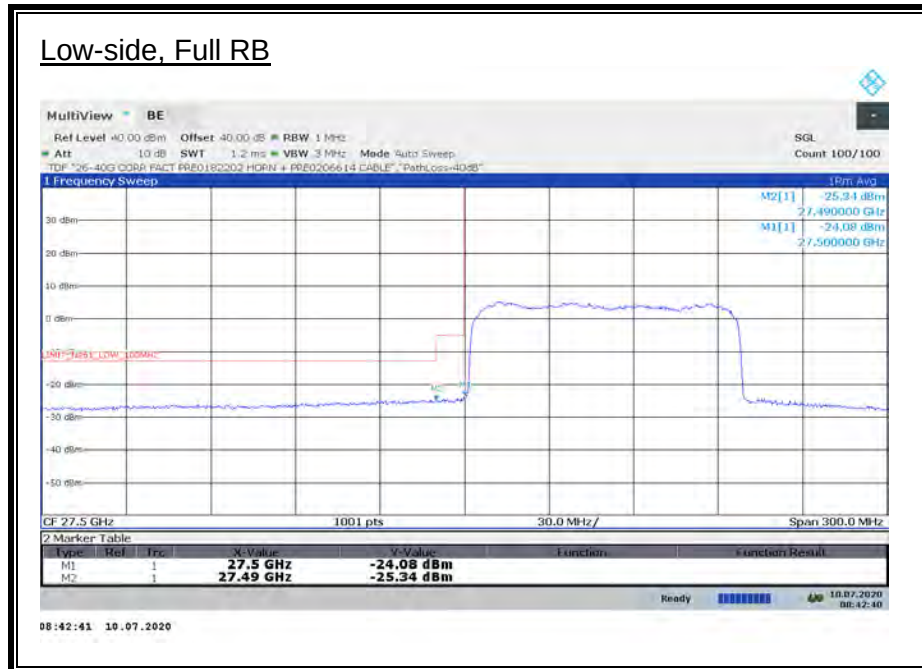

ANT M1, 100 MHz, MIMO, 1CC, QPSK

High-side, Single RB

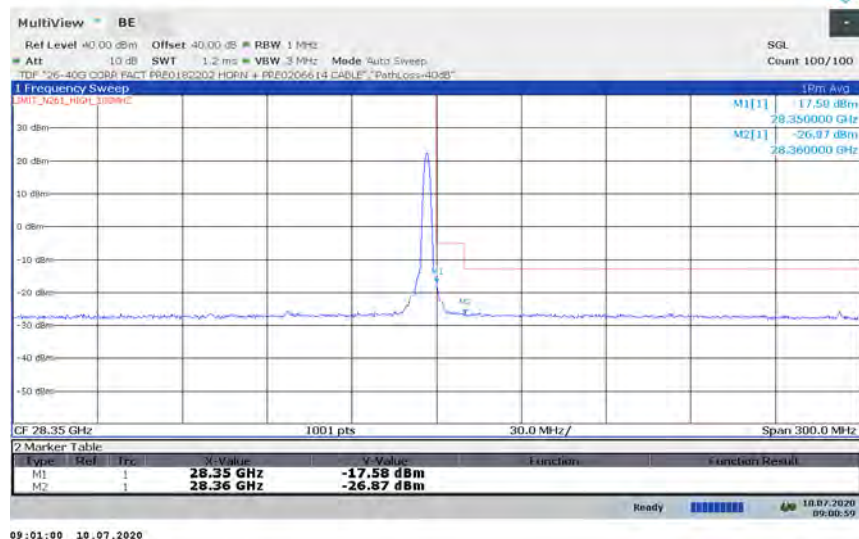


High-side, Full RB




ANT M2, 100 MHz, MIMO, 1CC, QPSK

Low-side, Single RB

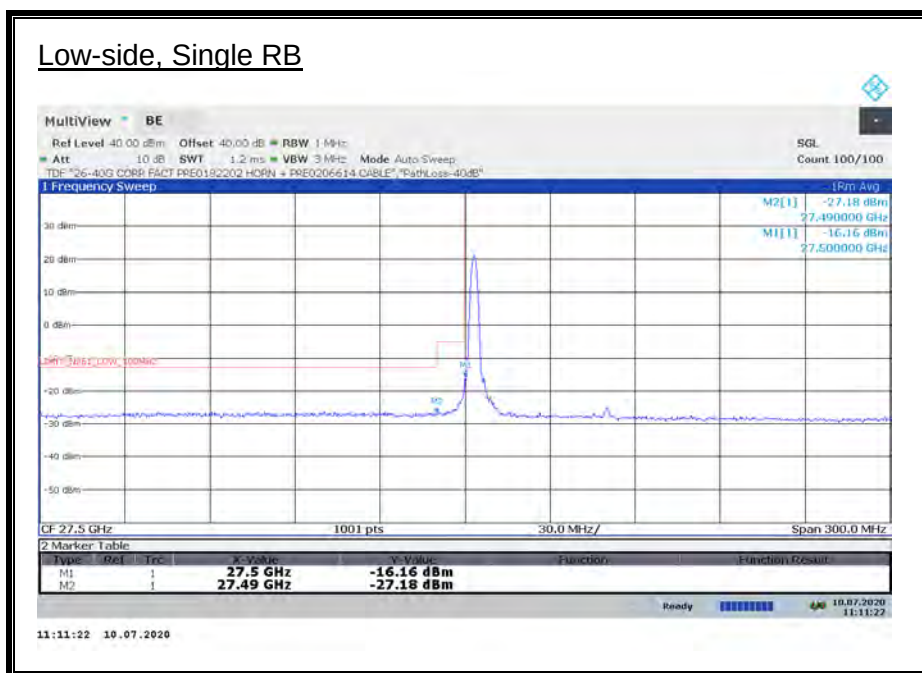


Low-side, Full RB

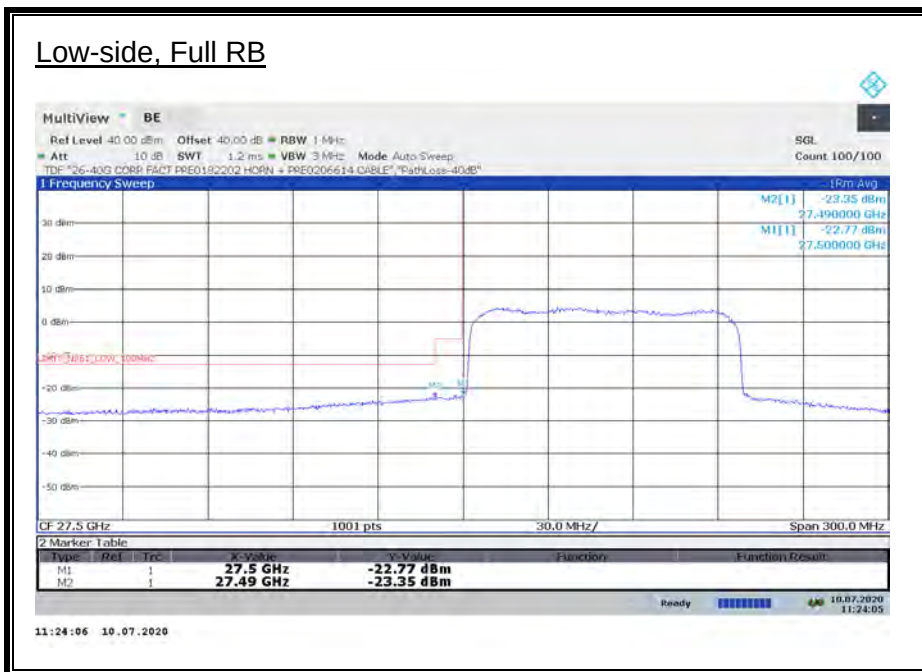


ANT M2, 100 MHz, MIMO, 1CC, QPSK

High-side, Single RB

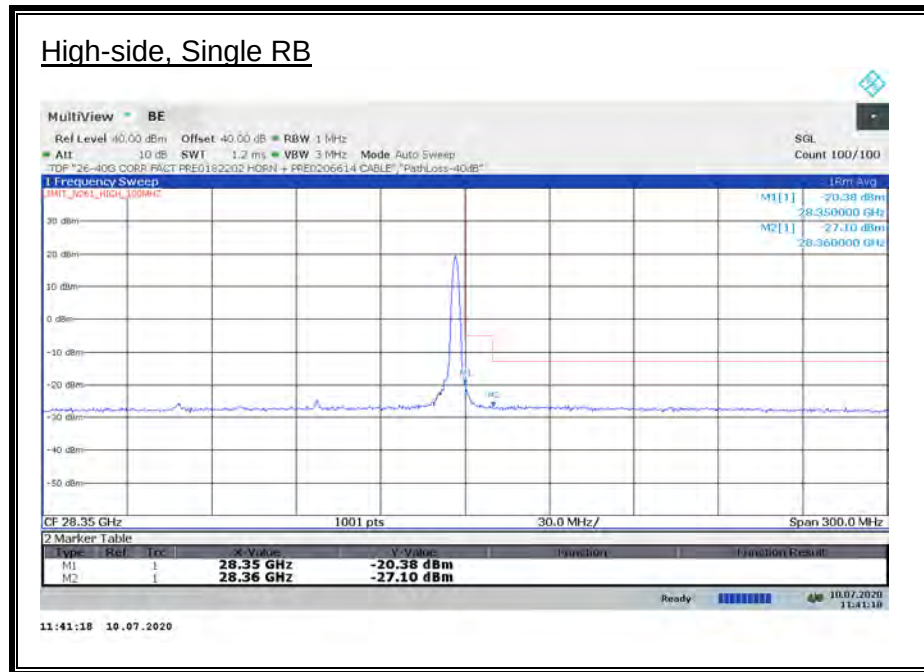

High-side, Full RB

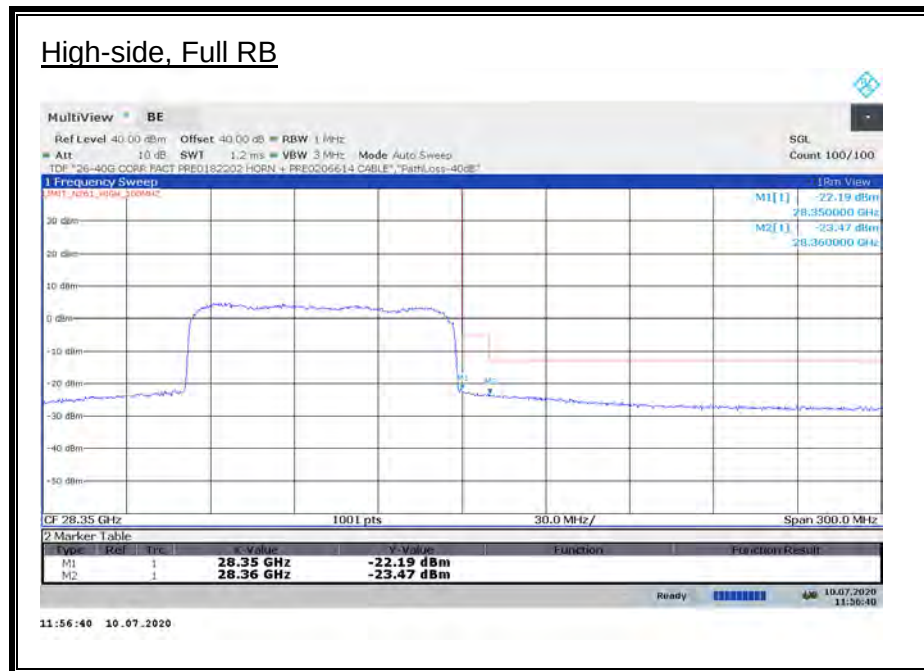

ANT M1 & M2, 100 MHz, MIMO, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-17.26	-5	-12.26
M1	100	L	1/0	27.49	-27.48	-13	-14.48
M2	100	L	1/0	27.5	-16.16	-5	-11.16
M2	100	L	1/0	27.49	-27.18	-13	-14.18
M1	100	L	66/0	27.5	-24.08	-5	-19.08
M1	100	L	66/0	27.49	-25.34	-13	-12.34
M2	100	L	66/0	27.5	-22.77	-5	-17.77
M2	100	L	66/0	27.49	-23.35	-13	-10.35
M1	100	H	1/66	28.35	-17.58	-5	-12.58
M1	100	H	1/66	28.36	-26.87	-13	-13.87
M2	100	H	1/66	28.35	-20.38	-5	-15.38
M2	100	H	1/66	28.36	-27.10	-13	-14.10
M1	100	H	66/0	28.35	-24.43	-5	-19.43
M1	100	H	66/0	28.36	-25.33	-13	-12.33
M2	100	H	66/0	28.35	-22.19	-5	-17.19
M2	100	H	66/0	28.36	-23.47	-13	-10.47

ANT M1 & M2, 100 MHz, MIMO, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-17.64	-5	-12.64
M1	100	L	1/0	27.49	-27.46	-13	-14.46
M2	100	L	1/0	27.5	-16.74	-5	-11.74
M2	100	L	1/0	27.49	-26.98	-13	-13.98
M1	100	L	66/0	27.5	-25.54	-5	-20.54
M1	100	L	66/0	27.49	-25.92	-13	-12.92
M2	100	L	66/0	27.5	-25.50	-5	-20.50
M2	100	L	66/0	27.49	-25.69	-13	-12.69
M1	100	H	1/66	28.35	-21.62	-5	-16.62
M1	100	H	1/66	28.36	-27.65	-13	-14.65
M2	100	H	1/66	28.35	-23.96	-5	-18.96
M2	100	H	1/66	28.36	-28.17	-13	-15.17
M1	100	H	66/0	28.35	-26.16	-5	-21.16
M1	100	H	66/0	28.36	-26.92	-13	-13.92
M2	100	H	66/0	28.35	-26.66	-5	-21.66
M2	100	H	66/0	28.36	-26.77	-13	-13.77

ANT M1 & M2, 100 MHz, MIMO, 1CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-19.47	-5	-14.47
M1	100	L	1/0	27.49	-27.95	-13	-14.95
M2	100	L	1/0	27.5	-19.64	-5	-14.64
M2	100	L	1/0	27.49	-26.74	-13	-13.74
M1	100	L	66/0	27.5	-25.69	-5	-20.69
M1	100	L	66/0	27.49	-25.84	-13	-12.84
M2	100	L	66/0	27.5	-24.24	-5	-19.24
M2	100	L	66/0	27.49	-24.73	-13	-11.73
M1	100	H	1/66	28.35	-18.54	-5	-13.54
M1	100	H	1/66	28.36	-26.81	-13	-13.81
M2	100	H	1/66	28.35	-21.17	-5	-16.17
M2	100	H	1/66	28.36	-26.95	-13	-13.95
M1	100	H	66/0	28.35	-25.23	-5	-20.23
M1	100	H	66/0	28.36	-25.20	-13	-12.20
M2	100	H	66/0	28.35	-24.32	-5	-19.32
M2	100	H	66/0	28.36	-25.31	-13	-12.31

ANT M1 & M2, 100 MHz, MIMO, 1CC, 64QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-21.15	-5	-16.15
M1	100	L	1/0	27.49	-27.40	-13	-14.40
M2	100	L	1/0	27.5	-21.45	-5	-16.45
M2	100	L	1/0	27.49	-27.66	-13	-14.66
M1	100	L	66/0	27.5	-26.13	-5	-21.13
M1	100	L	66/0	27.49	-26.52	-13	-13.52
M2	100	L	66/0	27.5	-25.89	-5	-20.89
M2	100	L	66/0	27.49	-26.26	-13	-13.26
M1	100	H	1/66	28.35	-22.04	-5	-17.04
M1	100	H	1/66	28.36	-27.02	-13	-14.02
M2	100	H	1/66	28.35	-22.66	-5	-17.66
M2	100	H	1/66	28.36	-27.33	-13	-14.33
M1	100	H	66/0	28.35	-26.06	-5	-21.06
M1	100	H	66/0	28.36	-26.35	-13	-13.35
M2	100	H	66/0	28.35	-25.77	-5	-20.77
M2	100	H	66/0	28.36	-25.90	-13	-12.90

8.3.8. BAND EDGE RESULTS n261 MIMO 2CC


ANT M1, 50 MHz, MIMO, 2CC, QPSK

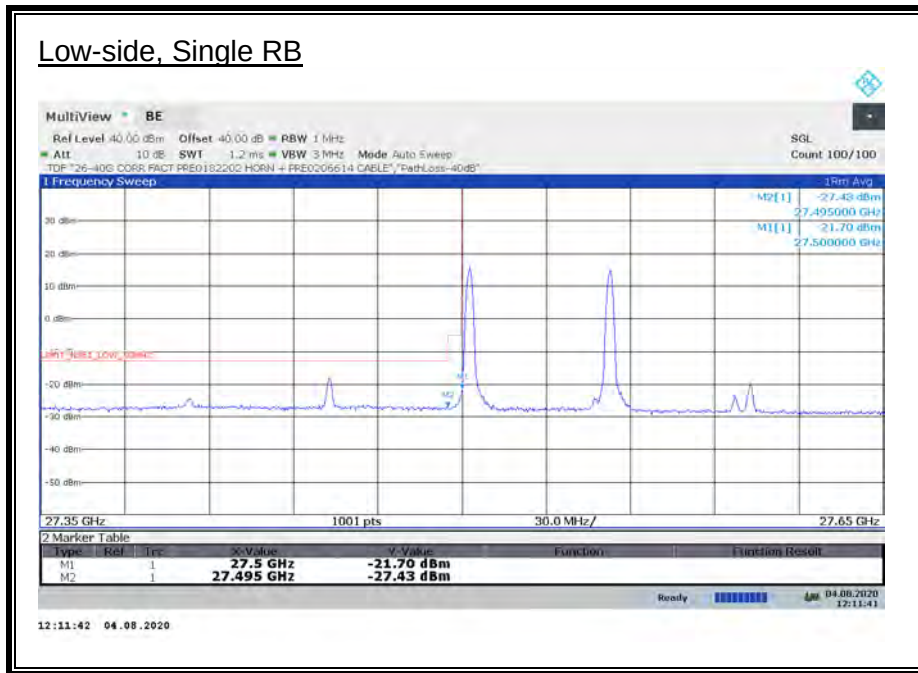


ANT M1, 50 MHz, MIMO, 2CC, QPSK

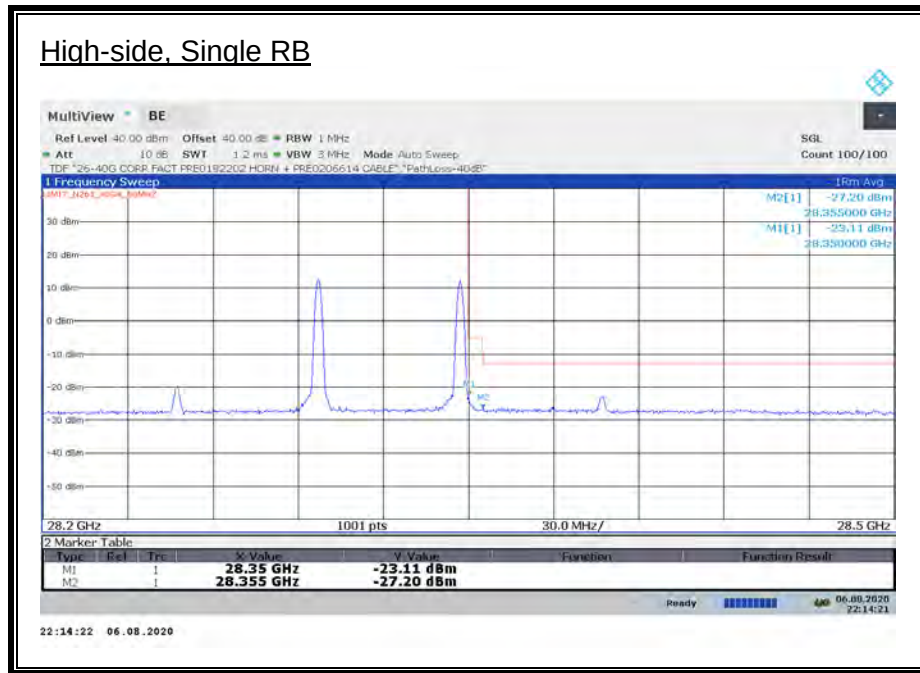

ANT M2, 50 MHz, MIMO, 2CC, QPSK

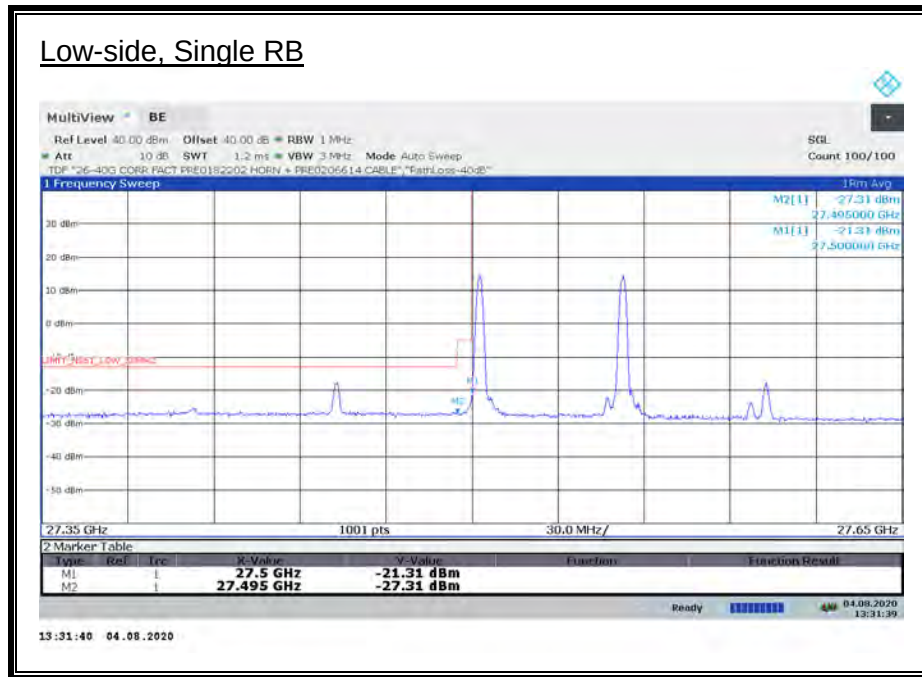

ANT M2, 50 MHz, MIMO, 2CC, QPSK

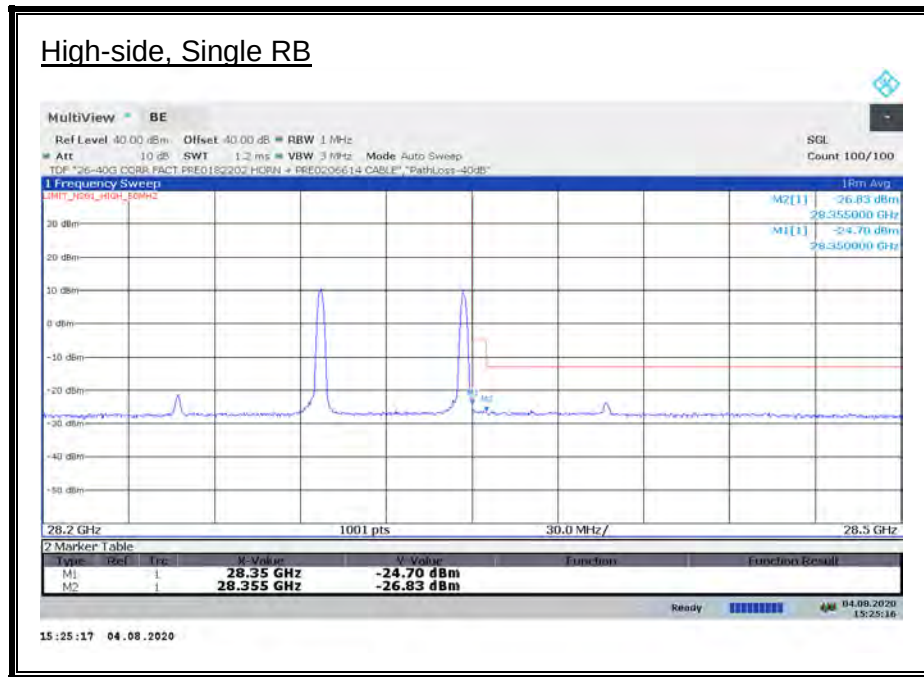

ANT M1 & M2, 50 MHz, MIMO, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-21.70	-5	-16.70
M1	50	L	1/0	27.495	-27.43	-13	-14.43
M2	50	L	1/0	27.5	-21.31	-5	-16.31
M2	50	L	1/0	27.495	-27.31	-13	-14.31
M1	50	H	1/32	28.35	-23.11	-5	-18.11
M1	50	H	1/32	28.355	-27.20	-13	-14.20
M2	50	H	1/32	28.35	-24.70	-5	-19.70
M2	50	H	1/32	28.355	-26.83	-13	-13.83

ANT M1 & M2, 50 MHz, MIMO, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-19.75	-5	-14.75
M1	50	L	1/0	27.495	-21.96	-13	-8.96
M2	50	L	1/0	27.5	-19.84	-5	-14.84
M2	50	L	1/0	27.495	-21.46	-13	-8.46
M1	50	H	1/32	28.35	-21.38	-5	-16.38
M1	50	H	1/32	28.355	-22.87	-13	-9.87
M2	50	H	1/32	28.35	-21.13	-5	-16.13
M2	50	H	1/32	28.355	-22.48	-13	-9.48

ANT M1 & M2, 50 MHz, MIMO, 2CC, 16QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-22.48	-5	-17.48
M1	50	L	1/0	27.495	-26.99	-13	-13.99
M2	50	L	1/0	27.5	-22.70	-5	-17.70
M2	50	L	1/0	27.495	-27.69	-13	-14.69
M1	50	H	1/32	28.35	-24.95	-5	-19.95
M1	50	H	1/32	28.355	-27.04	-13	-14.04
M2	50	H	1/32	28.35	-25.87	-5	-20.87
M2	50	H	1/32	28.355	-27.26	-13	-14.26


ANT M1 & M2, 50 MHz, MIMO, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-24.14	-5	-19.14
M1	50	L	1/0	27.495	-27.98	-13	-14.98
M2	50	L	1/0	27.5	-24.13	-5	-19.13
M2	50	L	1/0	27.495	-27.08	-13	-14.08
M1	50	H	1/32	28.35	-25.27	-5	-20.27
M1	50	H	1/32	28.355	-26.85	-13	-13.85
M2	50	H	1/32	28.35	-27.01	-5	-22.01
M2	50	H	1/32	28.355	-26.83	-13	-13.83


ANT M1, 100 MHz, MIMO, 2CC, QPSK



ANT M1, 100 MHz, MIMO, 2CC, QPSK

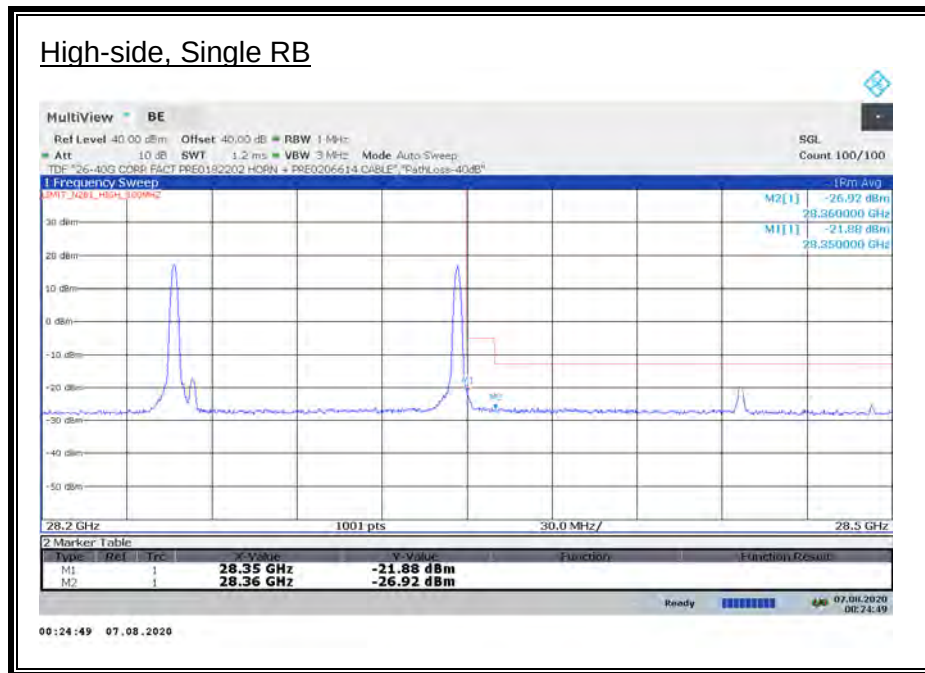

ANT M2, 100 MHz, MIMO, 2CC, QPSK

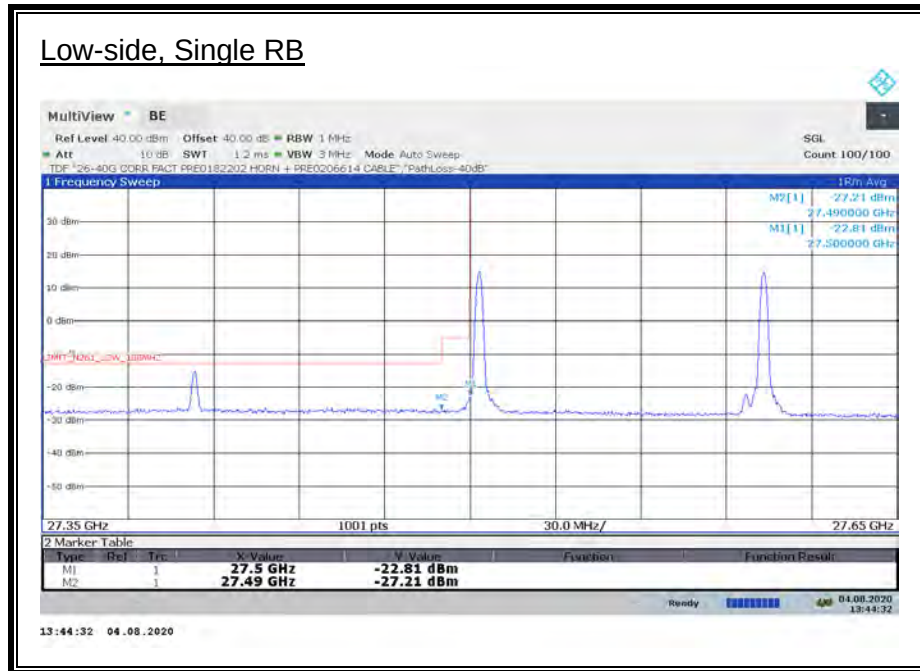

ANT M2, 100 MHz, MIMO, 2CC, QPSK



ANT M1 & M2, 100 MHz, MIMO, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-22.26	-5	-17.26
M1	100	L	1/0	27.49	-27.45	-13	-14.45
M2	100	L	1/0	27.5	-22.81	-5	-17.81
M2	100	L	1/0	27.49	-27.21	-13	-14.21
M1	100	H	1/66	28.35	-21.88	-5	-16.88
M1	100	H	1/66	28.36	-26.92	-13	-13.92
M2	100	H	1/66	28.35	-26.05	-5	-21.05
M2	100	H	1/66	28.36	-27.63	-13	-14.63

ANT M1 & M2, 100 MHz, MIMO, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-19.67	-5	-14.67
M1	100	L	1/0	27.49	-21.87	-13	-8.87
M2	100	L	1/0	27.5	-20.38	-5	-15.38
M2	100	L	1/0	27.49	-21.39	-13	-8.39
M1	100	H	1/66	28.35	-22.12	-5	-17.12
M1	100	H	1/66	28.36	-22.64	-13	-9.64
M2	100	H	1/66	28.35	-21.73	-5	-16.73
M2	100	H	1/66	28.36	-22.23	-13	-9.23

ANT M1 & M2, 100 MHz, MIMO, 2CC, 16QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-23.42	-5	-18.42
M1	100	L	1/0	27.49	-26.88	-13	-13.88
M2	100	L	1/0	27.5	-24.55	-5	-19.55
M2	100	L	1/0	27.49	-27.23	-13	-14.23
M1	100	H	1/66	28.35	-24.30	-5	-19.30
M1	100	H	1/66	28.36	-26.90	-13	-13.90
M2	100	H	1/66	28.35	-26.11	-5	-21.11
M2	100	H	1/66	28.36	-26.90	-13	-13.90

ANT M1 & M2, 100 MHz, MIMO, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-23.43	-5	-18.43
M1	100	L	1/0	27.49	-27.36	-13	-14.36
M2	100	L	1/0	27.5	-23.99	-5	-18.99
M2	100	L	1/0	27.49	-27.09	-13	-14.09
M1	100	H	1/66	28.35	-26.13	-5	-21.13
M1	100	H	1/66	28.36	-26.92	-13	-13.92
M2	100	H	1/66	28.35	-26.89	-5	-21.89
M2	100	H	1/66	28.36	-27.40	-13	-14.40

8.4. RADIATED SPURIOUS EMISSIONS

RULE PART(S)

FCC: §2.1051, §30.203

LIMIT

30.203 - (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower.

TEST PROCEDURE

KDB 842590 D01 Upper Microwave Flexible Use Service v01 Section 4.4.2 and Section 4.4.3. ANSI C63.26-2015 Clause 5.5.4 and Annex C.5.2.

All radiated spurious emissions were measured as EIRP to compare with the §30.203 TRP limits to demonstrate compliance.

RSE was investigated from 30 MHz – 100 GHz on n261 band and 30 MHz – 200 GHz on n260 band.

Plots below 18 GHz are corrected field strength levels, measured at 3 meter test distance. The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m. The field strength E is calculated $E (dB\mu V/m) = \text{Spectrum Analyzer Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$. All appropriate Antenna Factor and Cable Loss have been applied in the spectrum analyzer for each measurement.

RSEs above 18 GHz were measured at the appropriate far field distances listed on Section 5 on this report (FAR-FIELD DISTANCE AND MEASUREMENT DISTANCE). Then, the EIRP of RSE was calculated using the equations on ANSI C63.26-2015 Annex C.5.2, as described on Sections 8.2 and 8.3.

RSEs from 18 – 50 GHz were measured using a spectrum analyzer or EMI receiver with an internal preamplifier when applicable. Emissions above 50 GHz were measured using a harmonic mixer with spectrum analyzer, while an external LNA was used when applicable.

RSEs from 1 – 200 GHz were measured at 1.5 meters height.

All RSEs were measured for the configuration with the highest EIRP (SISO-Dual antenna configuration with QPSK modulation and a single RB) as representing the worst case. Preliminary radiated emissions tests on the low, middle and high channels indicated that the worst case radiated spurious emissions were on the channel with the highest power and so only the test data for that channel is included in this report.

As the single RB with 1CC mode has the highest power and is the same for all channel bandwidths, therefore the single RB with 1CC for the narrowest channel bandwidth was used as the worst case for purposes of RSE measurements.

The following worst case EIRP 1CC modes were used at tests at the pre-determined worst case y-axis (portrait) orientation:

n260 band:

Ant M1: SISO-Dual_QPSK_100 MHz_High CH, RB Offset 1/32 (1RB_M)

Ant M2: SISO-Dual_QPSK_50 MHz_Mid CH, RB Offset 1/15 (1RB_M)

n261 band:

Ant M1: SISO-Dual_QPSK_100 MHz_High CH, RB Offset 1/32 (1RB_M)

Ant M2: SISO-Dual_QPSK_50 MHz_Mid CH, RB Offset 1/15 (1RB_M)

In addition, the 2CC multi-carrier operations were verified for IMD product at the near upper and lower band edge regions. The measurements were made with the single RB active in each channel and plots showing the IMD product are provided. Both (50 MHz + 50 MHz) and (100 MHz + 100 MHz) channel bandwidths are tested and the signal level of the IMD products are similar for both modes. The test data for the worst case IMD emissions are reported.

Where the measured EIRP value is within 2 dB of the limit, a TRP measurement is made, otherwise the EIRP value is compared with the §30.203 TRP limits to demonstrate compliance.

For simultaneous transmission of multiple channels in the UWB, Wi-Fi bands, 5G FR2 bands and BT band, no noticeable new emission was found.

RESULTS

See the following pages.

TESTED BY:


Below 18 GHz Test Site: Chamber B

Above 18 GHz:

Employee IDs: 19296 & 19459, n261 band, Chamber 1

Employee IDs: 19470 & 19437, n260 band, Chamber 2


8.4.1. RADIATED EMISSIONS 30 MHz - 1 GHz n260

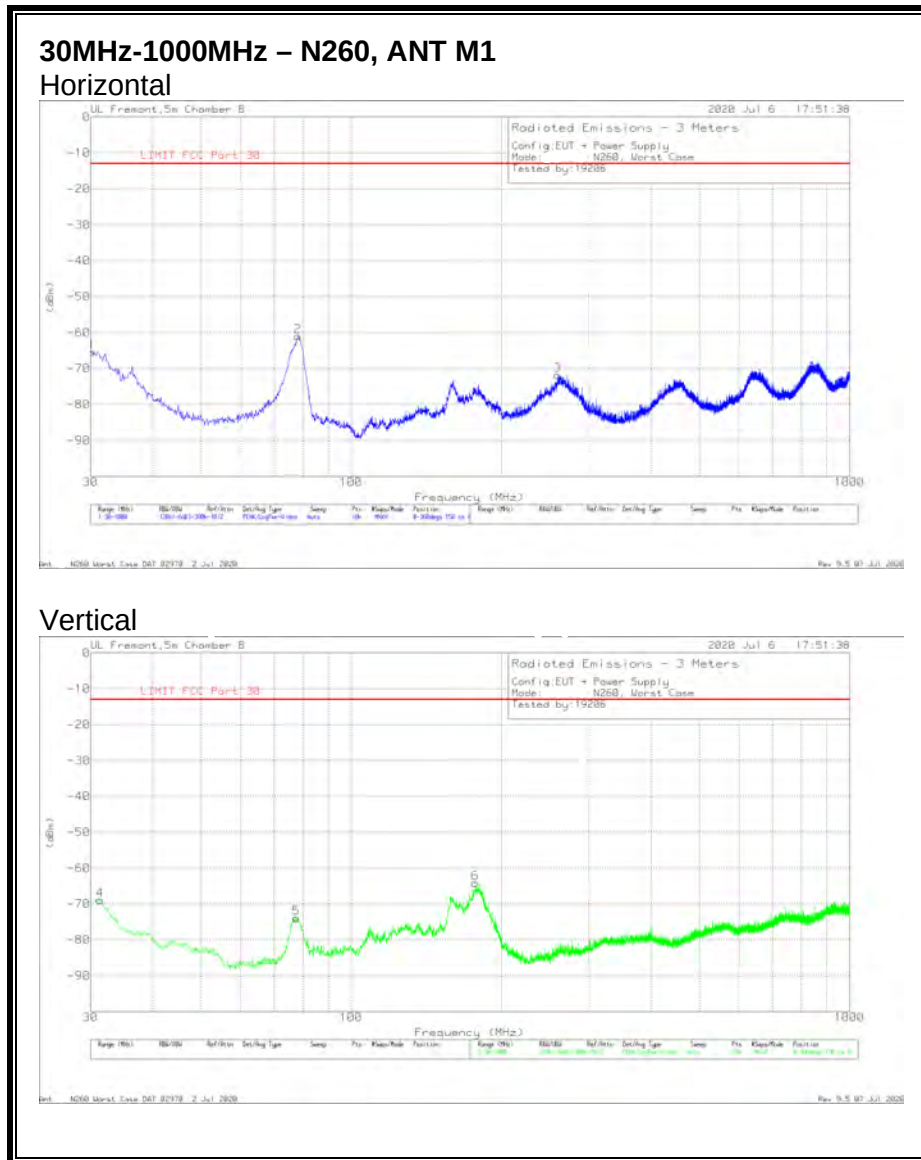

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T407 (dB/m)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.194	-77.87	Pk	26.9	-31.4	17	-65.37	-13	-52.37	0-360	150	H
4	31.358	-69.09	Pk	26	-31.4	5.6	-68.89	-13	-55.89	0-360	150	V
5	77.53	-68.13	Pk	13.6	-30.9	11.5	-73.93	-13	-60.93	0-360	150	V
2	78.209	-52.19	Pk	13.6	-30.9	8.5	-60.99	-13	-47.99	0-360	150	H
6	177.537	-61.4	Pk	17.2	-30.2	10.3	-64.1	-13	-51.1	0-360	150	V
3	259.502	-75.59	Pk	17.9	-29.8	15.7	-71.79	-13	-58.79	0-360	150	H

Pk - Peak detector
Rev 9.5 06 Mar 2020

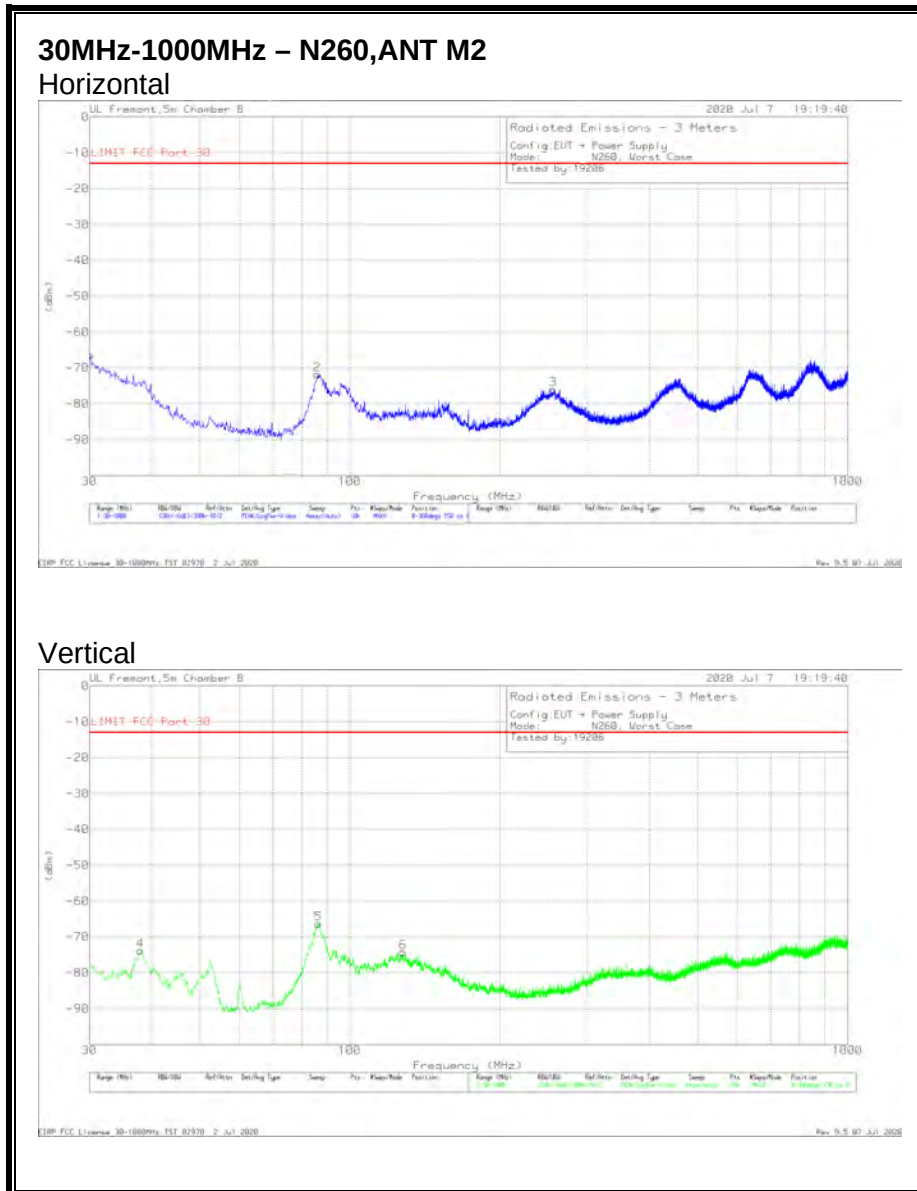


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T407 (dB/m)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.097	-79.24	Pk	27	-31.4	17.1	-66.54	-13	-53.54	0-360	150	H
4	37.954	-68.76	Pk	21.2	-31.3	5.1	-73.76	-13	-60.76	0-360	150	V
2	86.066	-63.79	Pk	13.2	-30.8	9.6	-71.79	-13	-58.79	0-360	150	H
5	86.454	-63.42	Pk	13.2	-30.8	14.8	-66.22	-13	-53.22	0-360	150	V
6	127.873	-78.41	Pk	19.6	-30.4	15	-74.21	-13	-61.21	0-360	150	V
3	256.01	-79.83	Pk	17.5	-29.8	16.2	-75.93	-13	-62.93	0-360	150	H

Pk - Peak detector
Rev 9.5 06 Mar 2020


8.4.2. RADIATED EMISSIONS 1-18 GHz n260

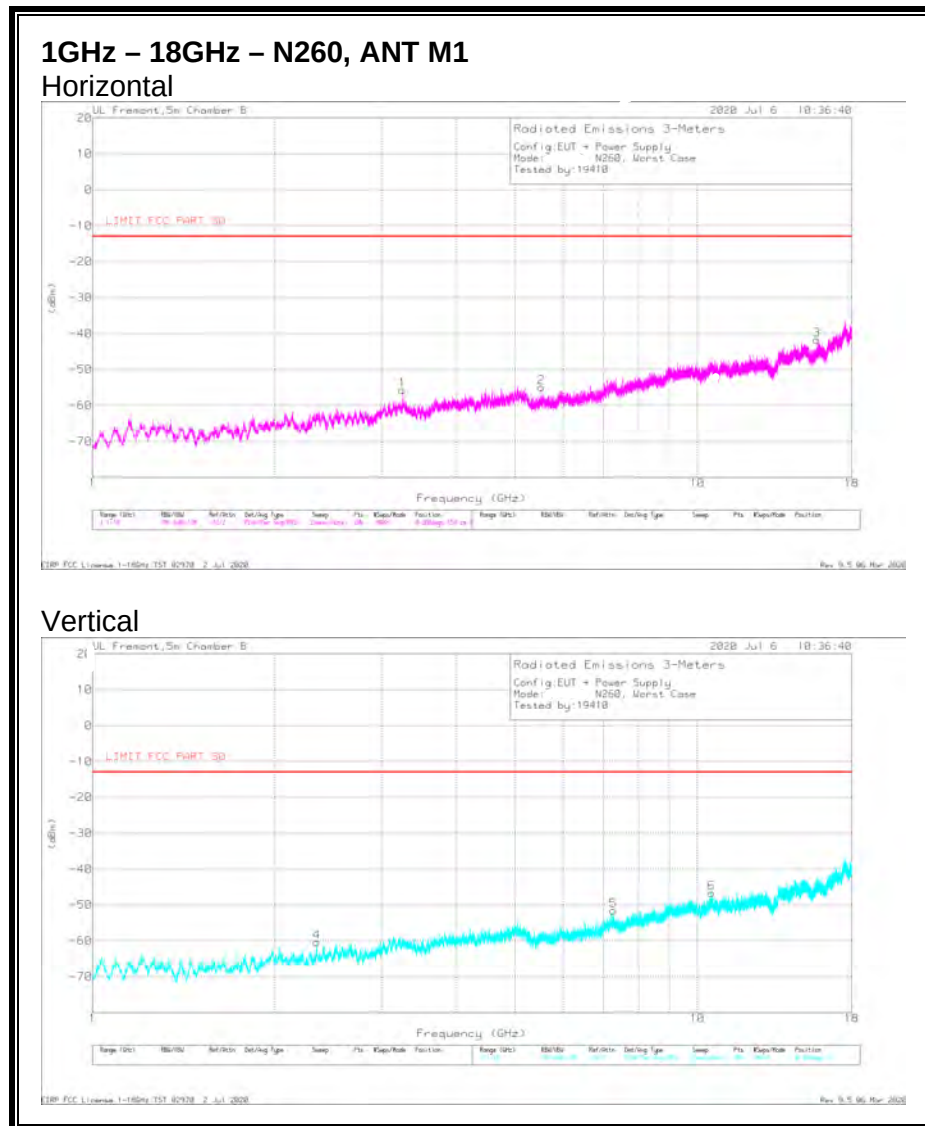

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T962 (dBm)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.34902	-68.44	Pk	28	-29.5	9.6	-60.34	-13	-47.34	0-360	150	V
1	3.25346	-69	Pk	31.3	-28.3	10.3	-55.7	-13	-42.7	0-360	150	H
2	5.51798	-70.86	Pk	33.2	-26	8.7	-54.96	-13	-41.96	0-360	150	H
5	7.27332	-72.8	Pk	37.2	-23.3	7.4	-51.5	-13	-38.5	0-360	150	V
6	10.54513	-75.05	Pk	39.6	-19.7	8.5	-46.65	-13	-33.65	0-360	150	V
3	15.7593	-73.4	Pk	41	-20.2	10.8	-41.8	-13	-28.8	0-360	150	H

Pk - Peak detector
Rev 9.5 06 Mar 2020


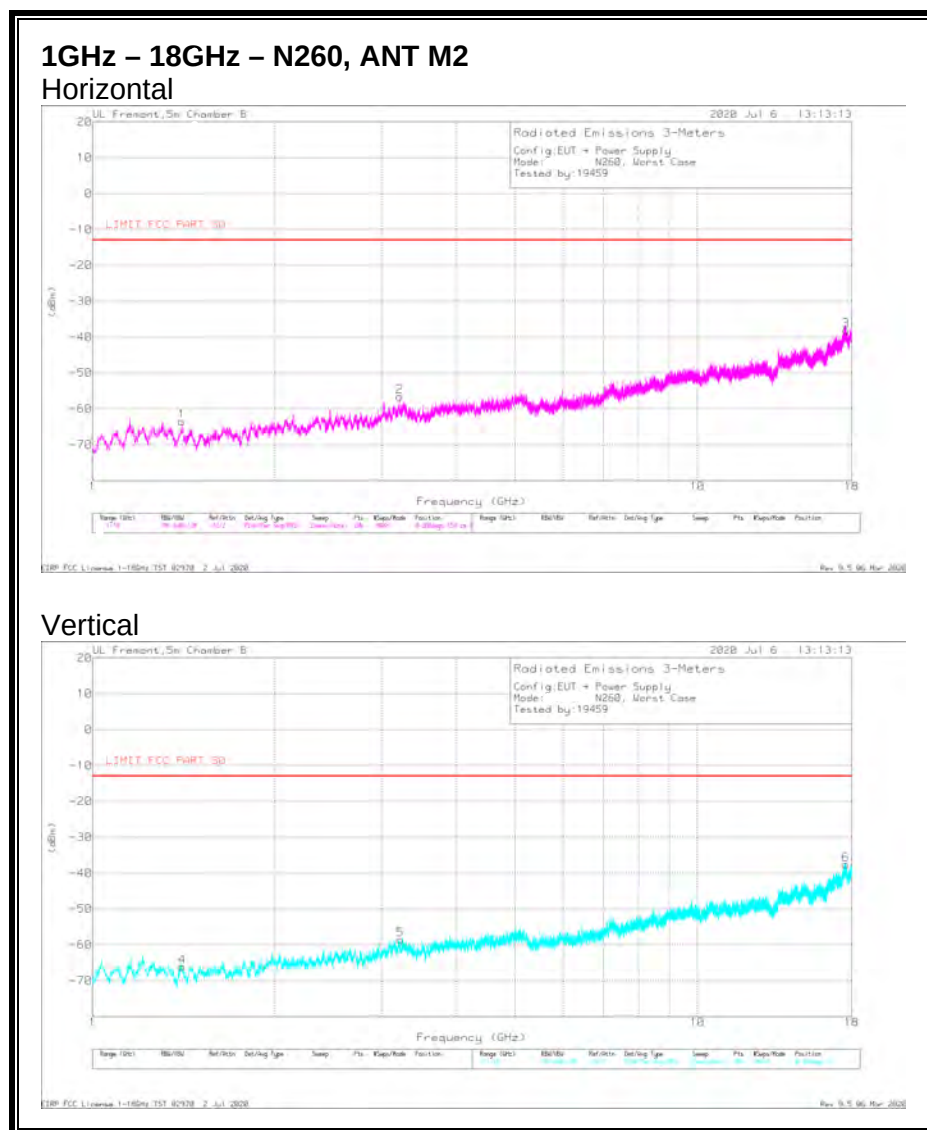


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.40462	-68.41	Pk	25.4	-30.8	10.3	-63.51	-13	-50.51	0-360	150	H
4	1.40717	-70.5	Pk	25.4	-30.8	9.8	-66.1	-13	-53.1	0-360	150	V
2	3.22031	-69.28	Pk	31.3	-28.3	9.7	-56.58	-13	-43.58	0-360	150	H
5	3.22626	-70.67	Pk	31.3	-28.3	9.1	-58.57	-13	-45.57	0-360	150	V
6	17.59454	-76.13	Pk	43.1	-16.1	11.5	-37.63	-13	-24.63	0-360	150	V
3	17.63194	-75.52	Pk	42.9	-16.9	11.4	-38.12	-13	-25.12	0-360	150	H


EIRP FCC License 1-18GHz.TST 02970 2 Jul 2020
Rev 9.5 06 Mar 2020

8.4.3. RADIATED EMISSIONS 18-26.5 GHz n260

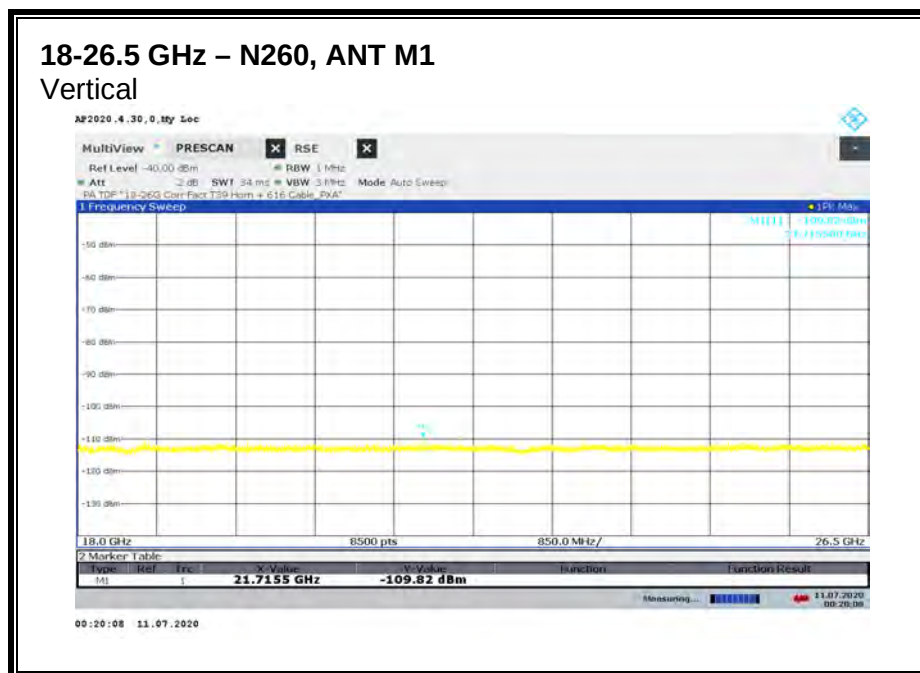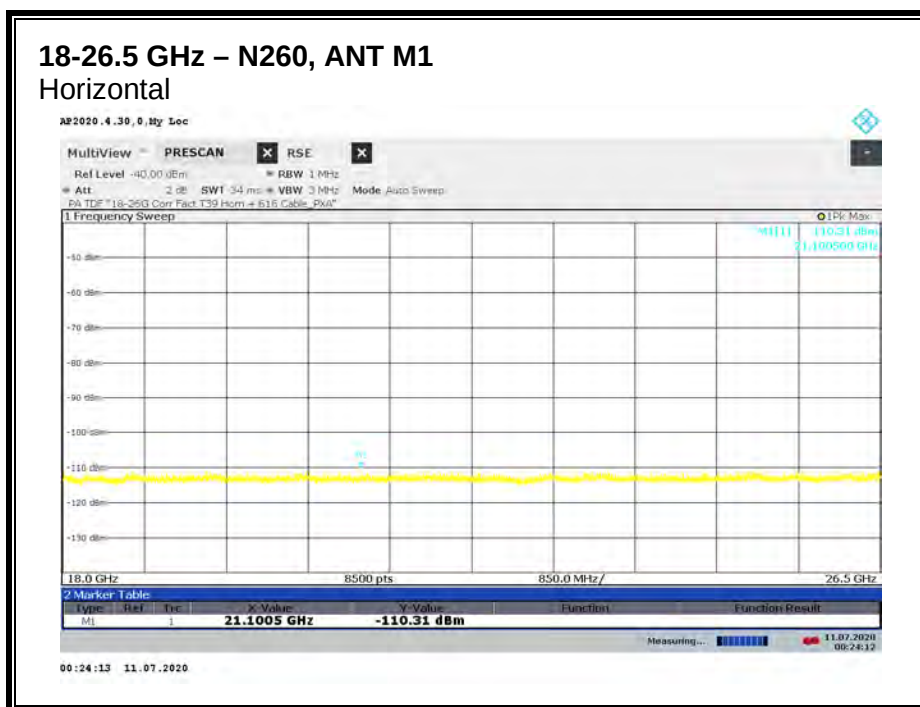

No Emission using Peak Detection.

18-26.5 GHz – N260, ANT M2 Horizontal

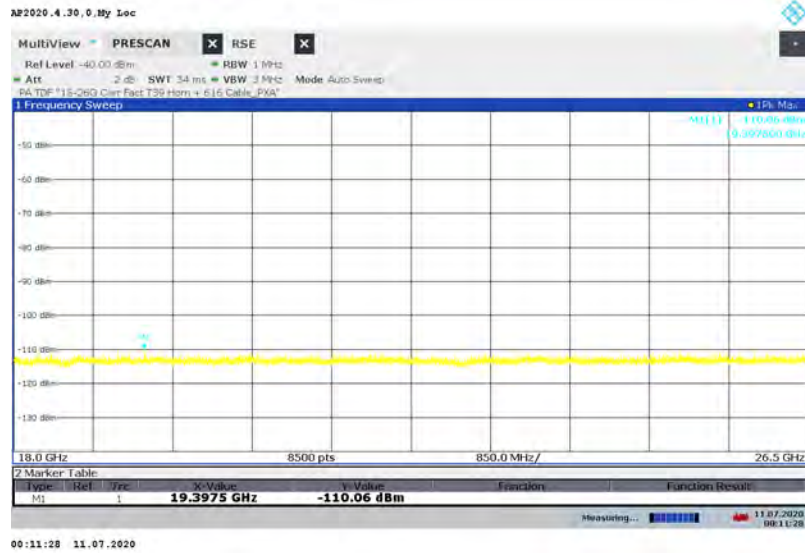

18-26.5 GHz – N260, ANT M2 Vertical



No Emission using Peak Detection.

8.4.4. RADIATED EMISSIONS 26.5-40 GHz n260

Note: 37-40 GHz covered by Fundamental and BE measurements.

26.5-37 GHz – N260 ANT M1 Horizontal



26.5-37 GHz – N260 ANT M1 Vertical



No Emission using Peak Detection.

26.5-37 GHz – N260 ANT M2 Horizontal





26.5-37 GHz – N260 ANT M2 Vertical



No Emission using Peak Detection.

8.4.5. RADIATED EMISSIONS 40-50 GHz n260

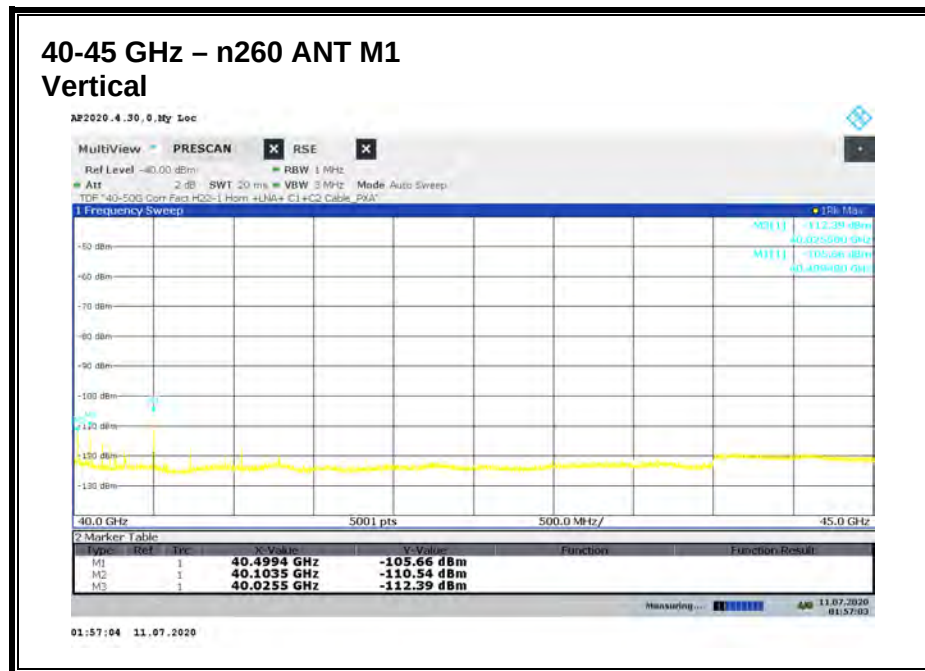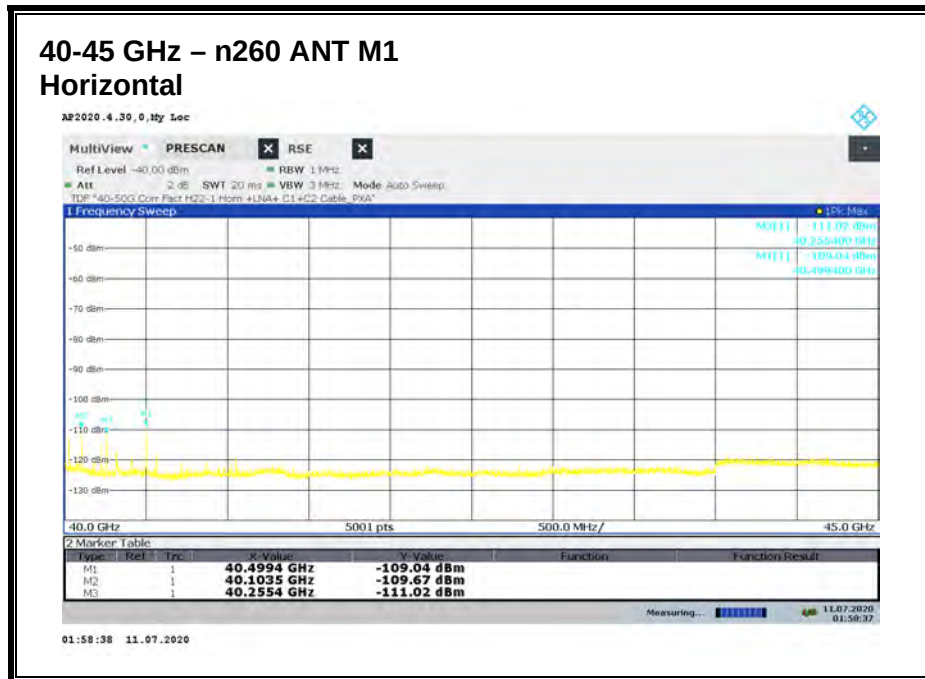

Emissions detected using Peak Detection. Avg EIRP was measured.

45-50 GHz – n260 ANT M1 Horizontal




45-50 GHz – n260 ANT M1 Vertical



Emissions detected using Peak Detection. Avg EIRP was measured.

40-45 GHz – n260 ANT M2 Horizontal

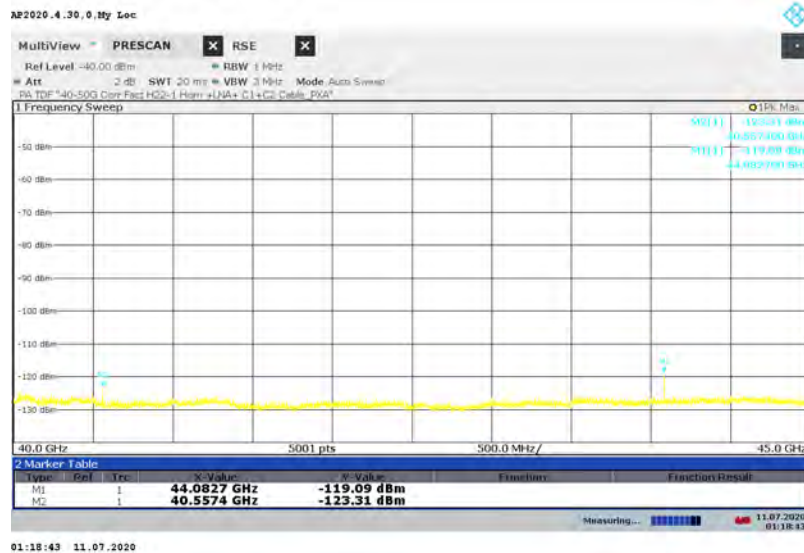


40-45 GHz – n260 ANT M2 Vertical




Emissions detected using Peak Detection. Avg EIRP was measured.

45-50 GHz – n260 ANT M2 Horizontal

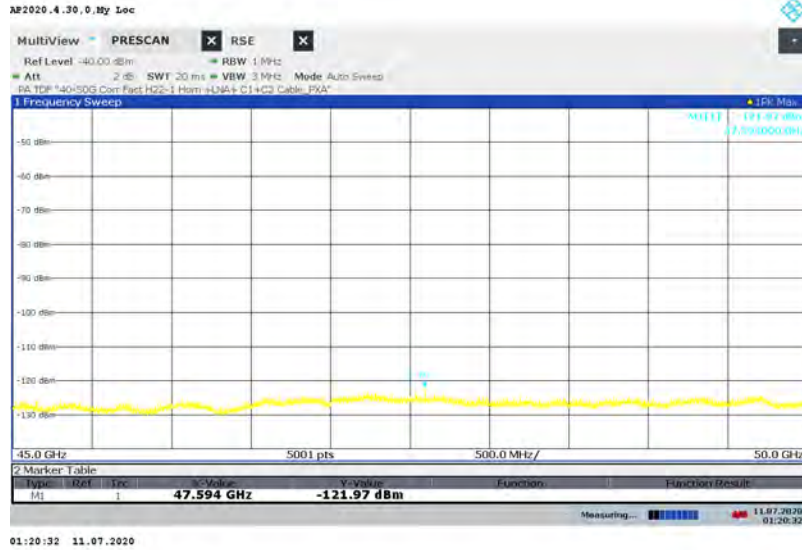

45-50 GHz – n260 ANT M2 Vertical

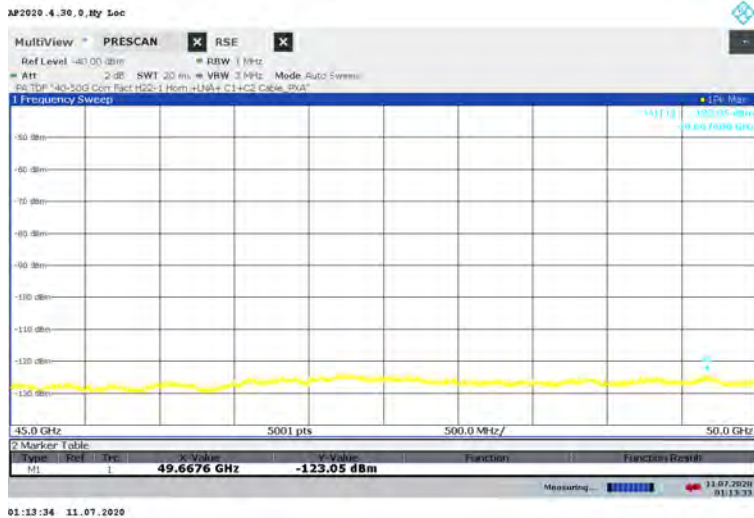

Emissions detected using Peak Detection. Avg EIRP was measured.

40-50 GHz n260

EIRP Results


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M1	40.49942	3	H	-122.29	-48.16	-13	-35.16
M1	40.49942	3	V	-122.7	-48.57	-13	-35.57
M1	40.102751	3	H	-126.57	-52.53	-13	-39.53
M1	40.102751	3	V	-126.19	-52.15	-13	-39.15
M1	40.256249	3	H	-118.28	-44.20	-13	-31.20
M1	40.256059	3	V	-116.44	-42.36	-13	-29.36
M2	44.08296	3	H	-120.49	-45.62	-13	-32.62
M2	44.08296	3	V	-117.27	-42.40	-13	-29.40
M2	42.02548	3	H	-139.88	-65.43	-13	-52.43
M2	42.02548	3	V	-130.73	-56.28	-13	-43.28

8.4.6. RADIATED EMISSIONS 50-75 GHz n260

50-75 GHz – N260 ANT M1 Horizontal



50-75 GHz – – N260 ANT M1 Vertical

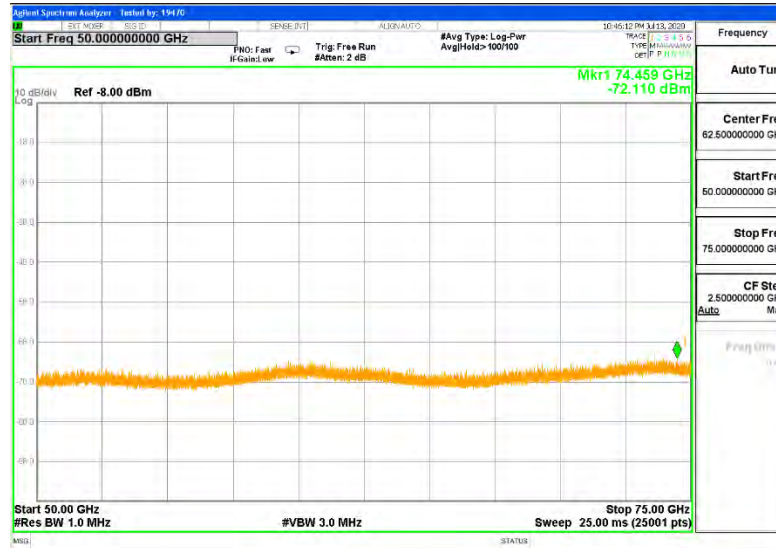


No Emission using Peak Detection.

50-75 GHz – N260 ANT M2 Horizontal




50-75 GHz – N260 ANT M2 Vertical

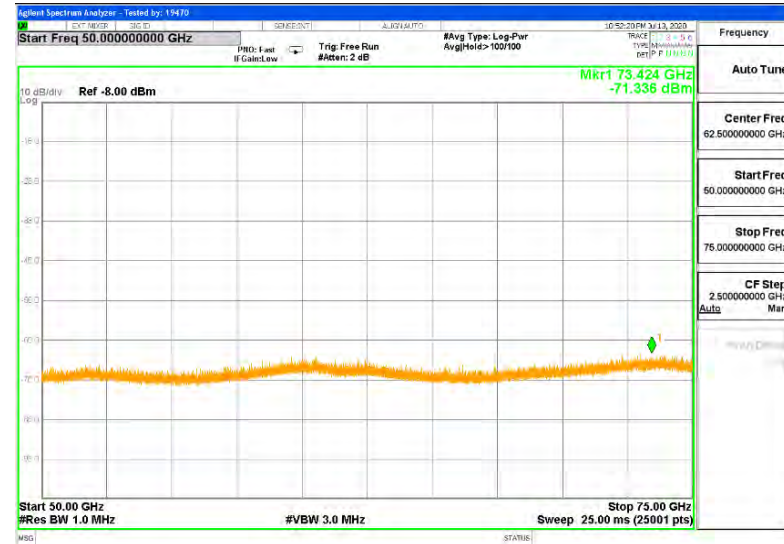


No Emission using Peak Detection.

8.4.7. RADIATED EMISSIONS 75-110 GHz n260

75-110 GHz – N260, ANT M1 Horizontal

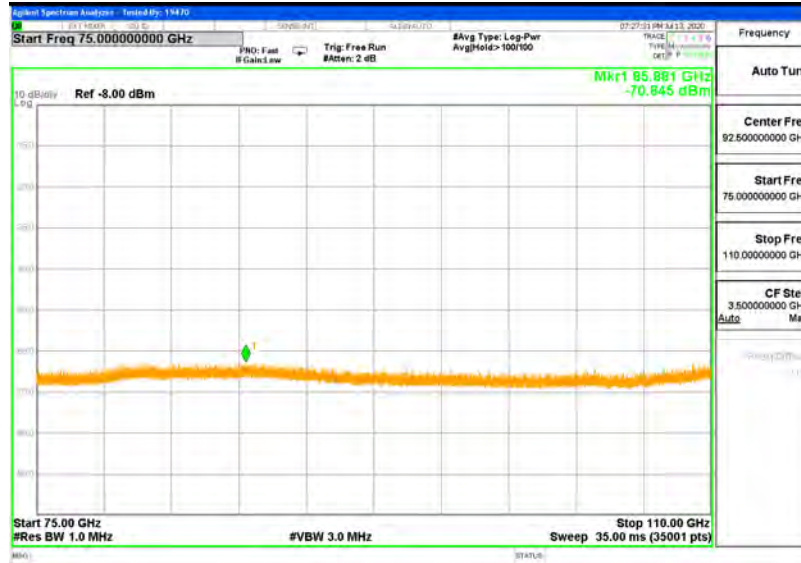


75-110 GHz – N260, ANT M1 Vertical

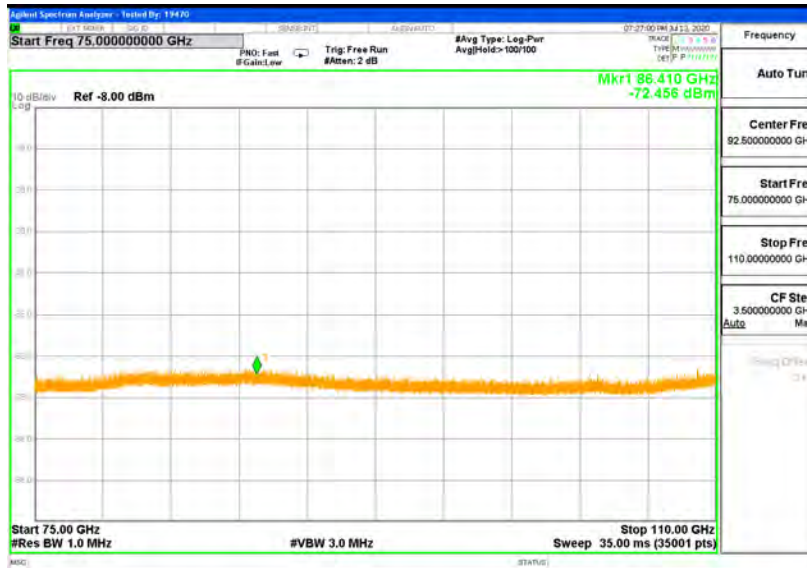


No Emission using Peak Detection.

75-110 GHz – N260, ANT M2 Horizontal

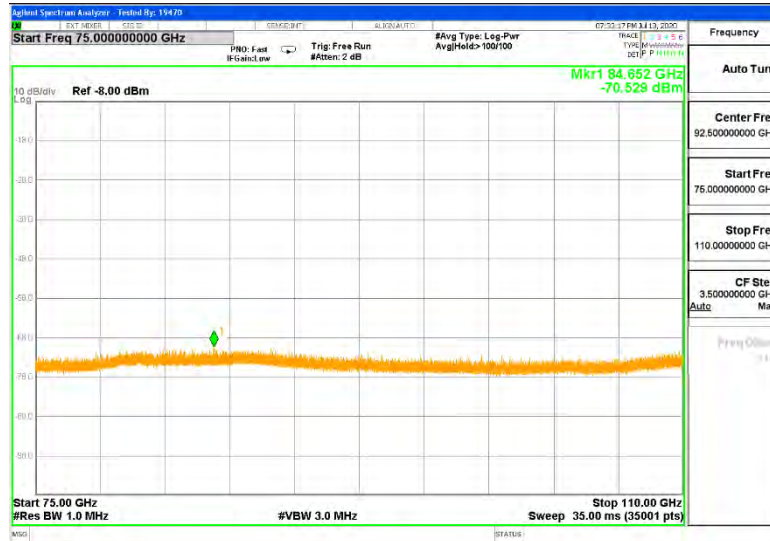

75-110 GHz – N260, ANT M2 Vertical

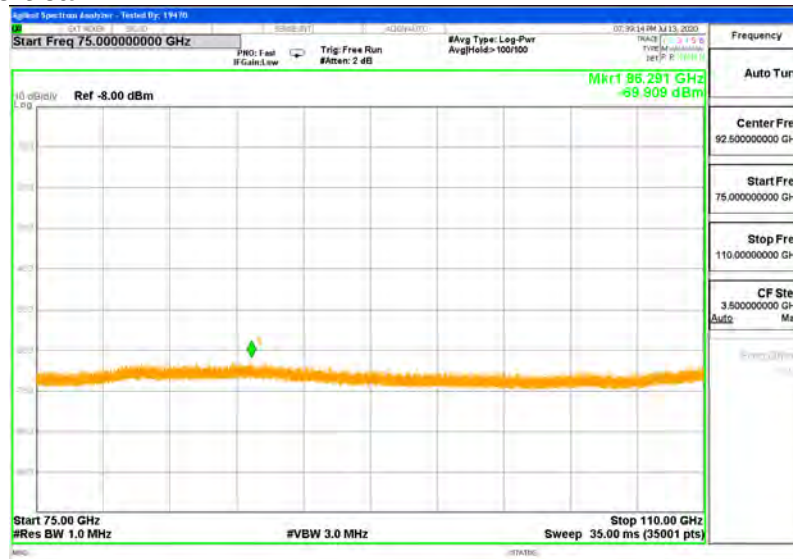

No Emission using Peak Detection.

8.4.8. RADIATED EMISSIONS 110-170 GHz n260

110-170 GHz – N260, ANT M1 Horizontal




110-170 GHz – N260, ANT M1 Vertical



Emissions detected using Peak Detection. Avg EIRP was measured.

110-170 GHz N260, ANT M2 Horizontal

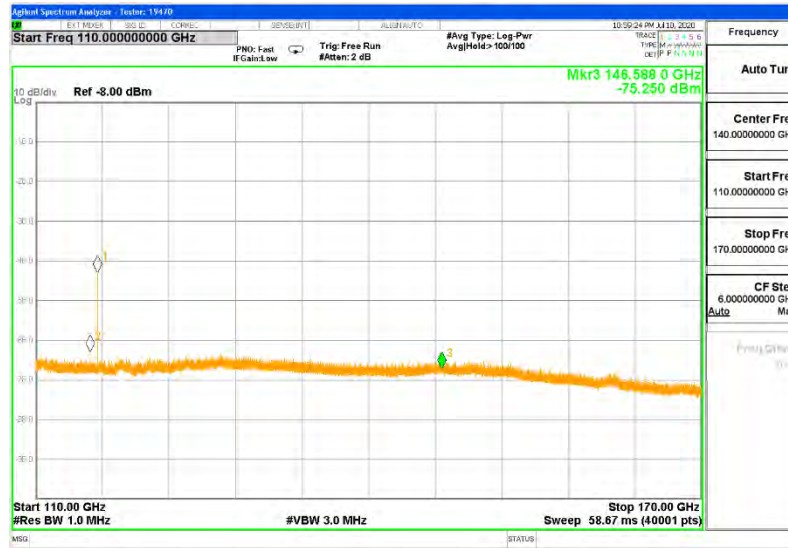

110-170 GHz N260, ANT M2 Vertical





Emissions detected using Peak Detection. Avg EIRP was measured.

110-170 GHz n260

EIRP Results


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M1	119.84687	1	H	-56.967	-27.89	-13	-14.89
M1	119.84687	1	V	-61.96	-32.88	-13	-19.88
M2	115.56526	1	H	-55.081	-26.34	-13	-13.34
M2	115.56526	1	V	-49.326	-20.58	-13	-7.58

8.4.9. RADIATED EMISSIONS 170-200 GHz n260

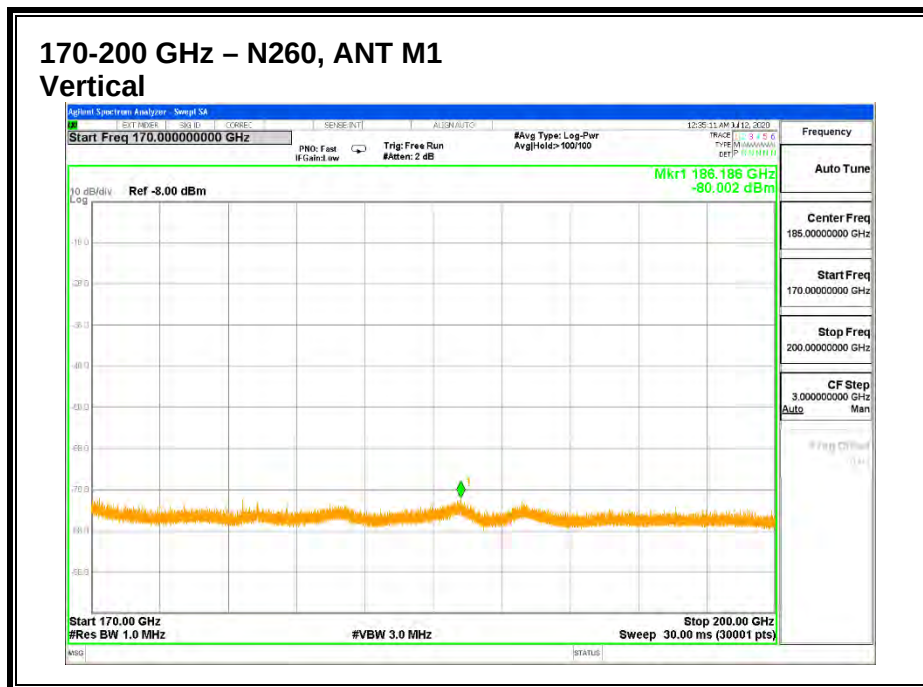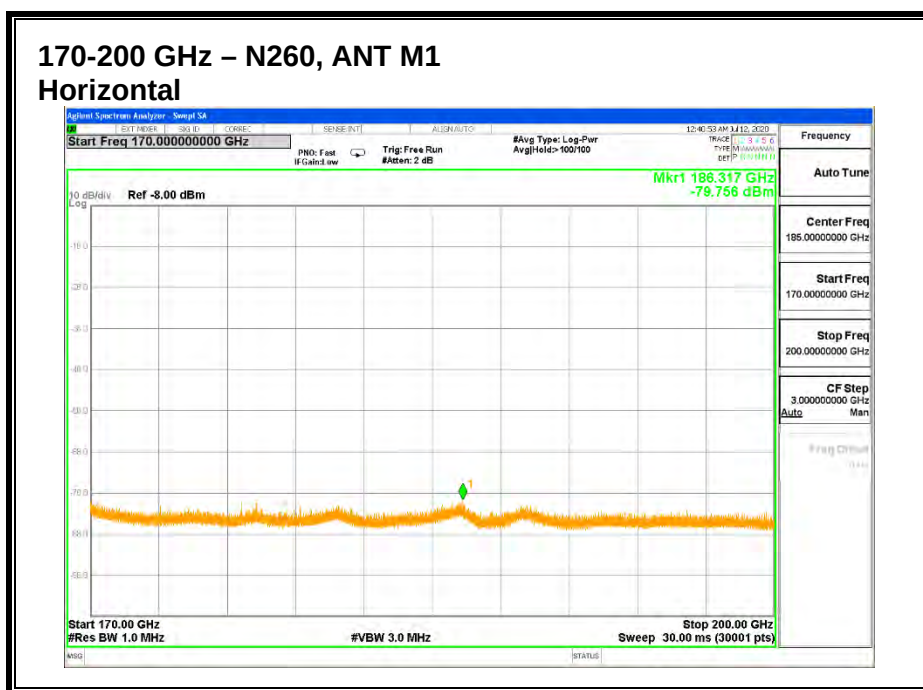


No Emission using Peak Detection.

170-200 GHz – N260, ANT M2 Horizontal

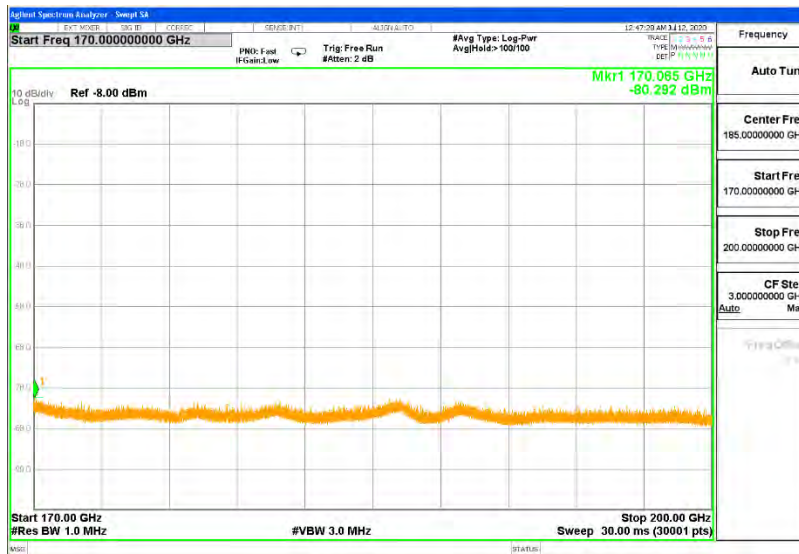


170-200 GHz – N260, ANT M2 Vertical

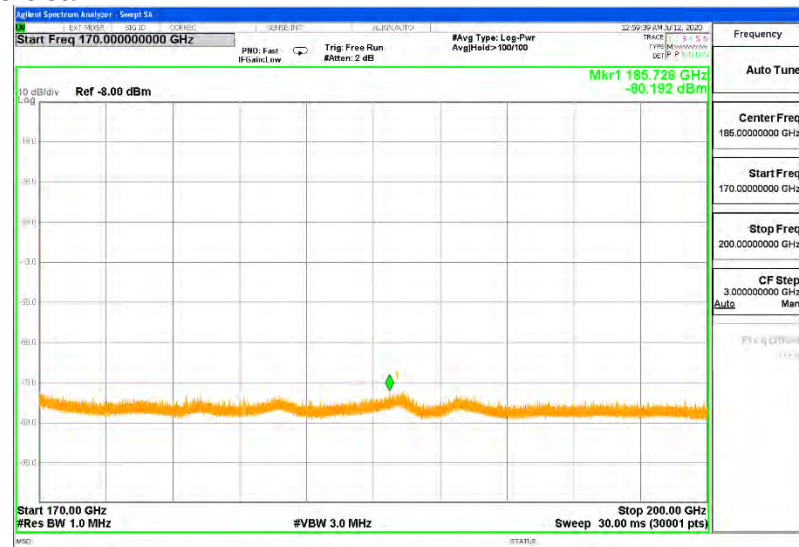

No Emission using Peak Detection.


8.4.10. RADIATED EMISSIONS 30 MHz - 1 GHz n261

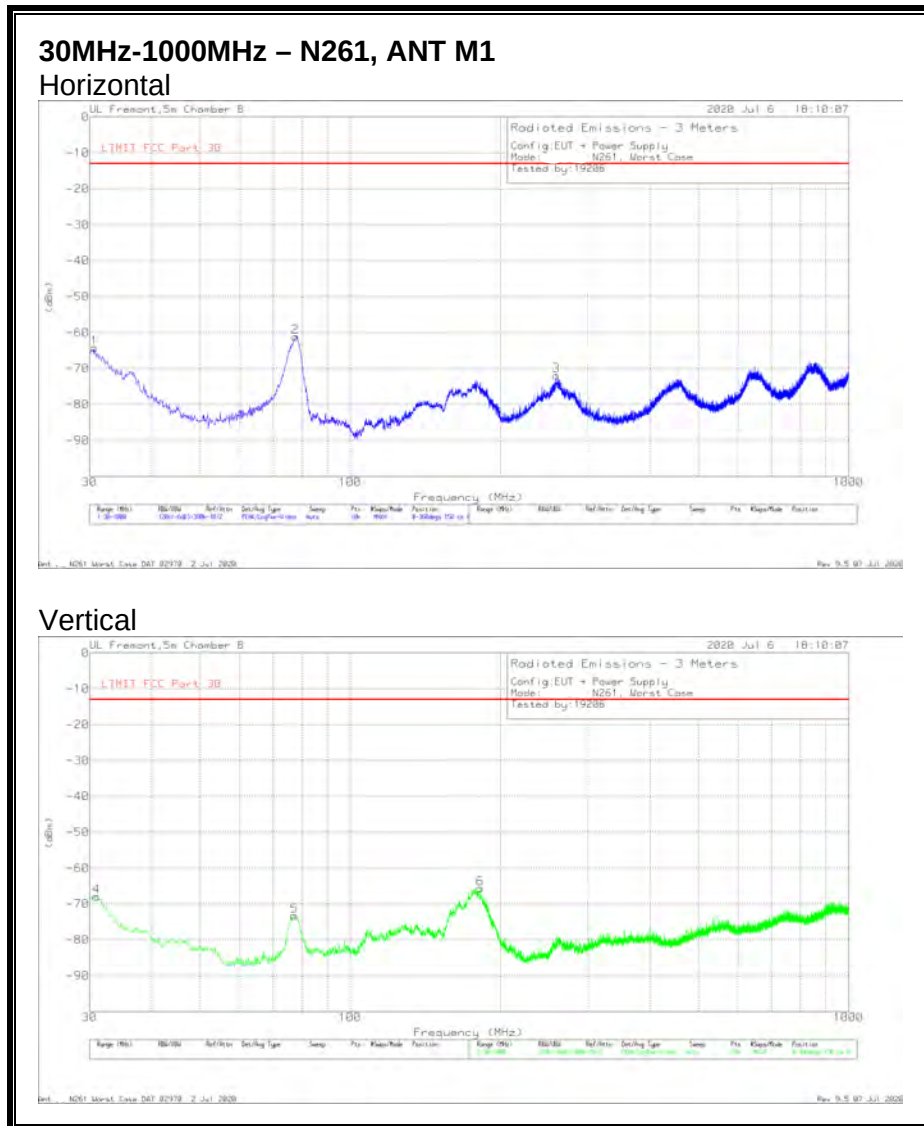

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T407 (dBm)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.679	-76.21	Pk	26.6	-31.4	16.8	-64.21	-13	-51.21	0-360	150	H
4	30.97	-68.61	Pk	26.3	-31.4	5.8	-67.91	-13	-54.91	0-360	150	V
5	77.239	-67.44	Pk	13.6	-30.9	11.4	-73.34	-13	-60.34	0-360	150	V
2	77.724	-52.31	Pk	13.6	-30.9	8.5	-61.11	-13	-48.11	0-360	150	H
6	182.387	-62.35	Pk	17	-30.2	9.9	-65.65	-13	-52.65	0-360	150	V
3	259.017	-75.77	Pk	17.8	-29.8	15.9	-71.87	-13	-58.87	0-360	150	H

Pk - Peak detector
Rev 9.5 06 Mar 2020

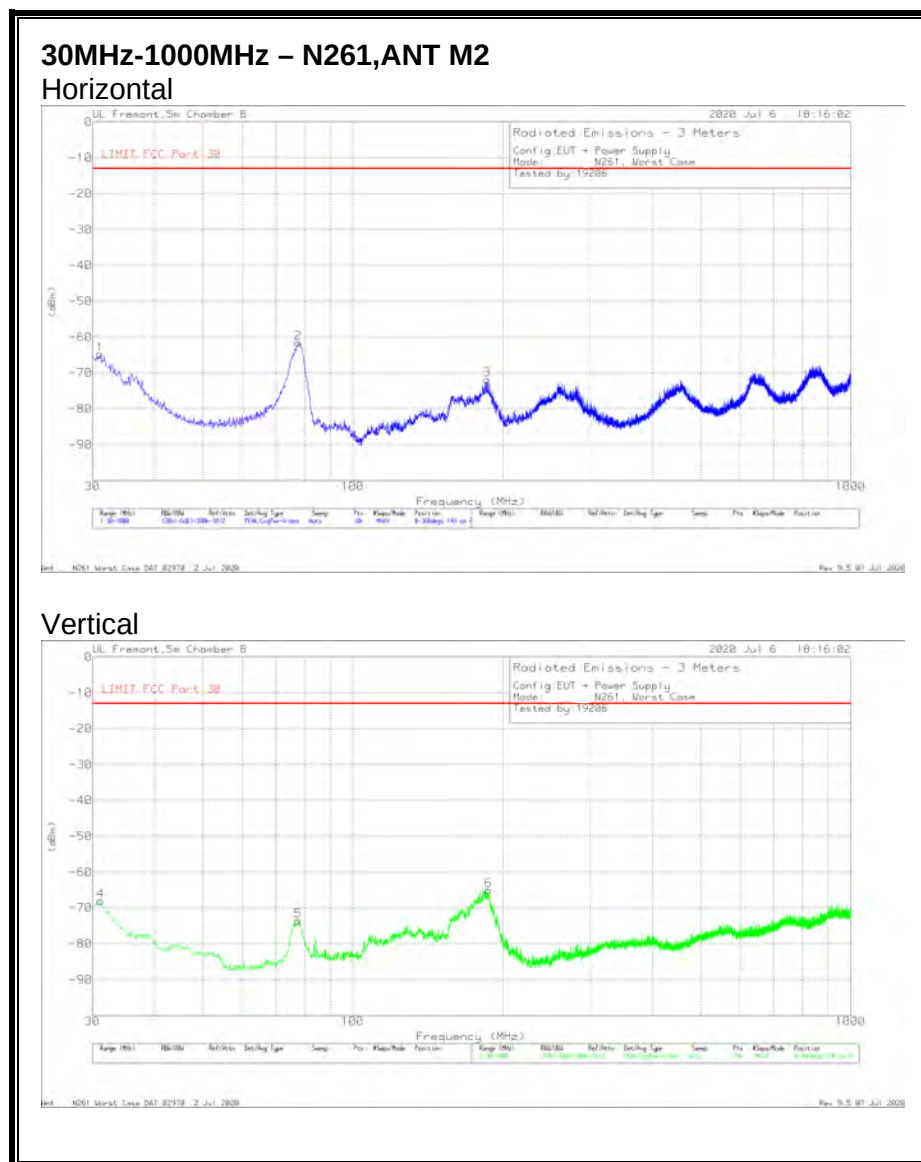


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T407 (dBm)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	31.067	-76.39	Pk	26.3	-31.4	16.7	-64.79	-13	-51.79	0-360	149	H
4	31.164	-68.56	Pk	26.2	-31.4	5.7	-68.06	-13	-55.06	0-360	150	V
5	77.53	-67.73	Pk	13.6	-30.9	11.5	-73.53	-13	-60.53	0-360	150	V
2	77.724	-52.81	Pk	13.6	-30.9	8.5	-61.61	-13	-48.61	0-360	149	H
3	185.976	-66.81	Pk	17	-30.1	8.1	-71.81	-13	-58.81	0-360	149	H
6	187.237	-61.54	Pk	17	-30.1	9.6	-65.04	-13	-52.04	0-360	150	V

Pk - Peak detector
Rev 9.5 06 Mar 2020


8.4.11. RADIATED EMISSIONS 1-18 GHz n261

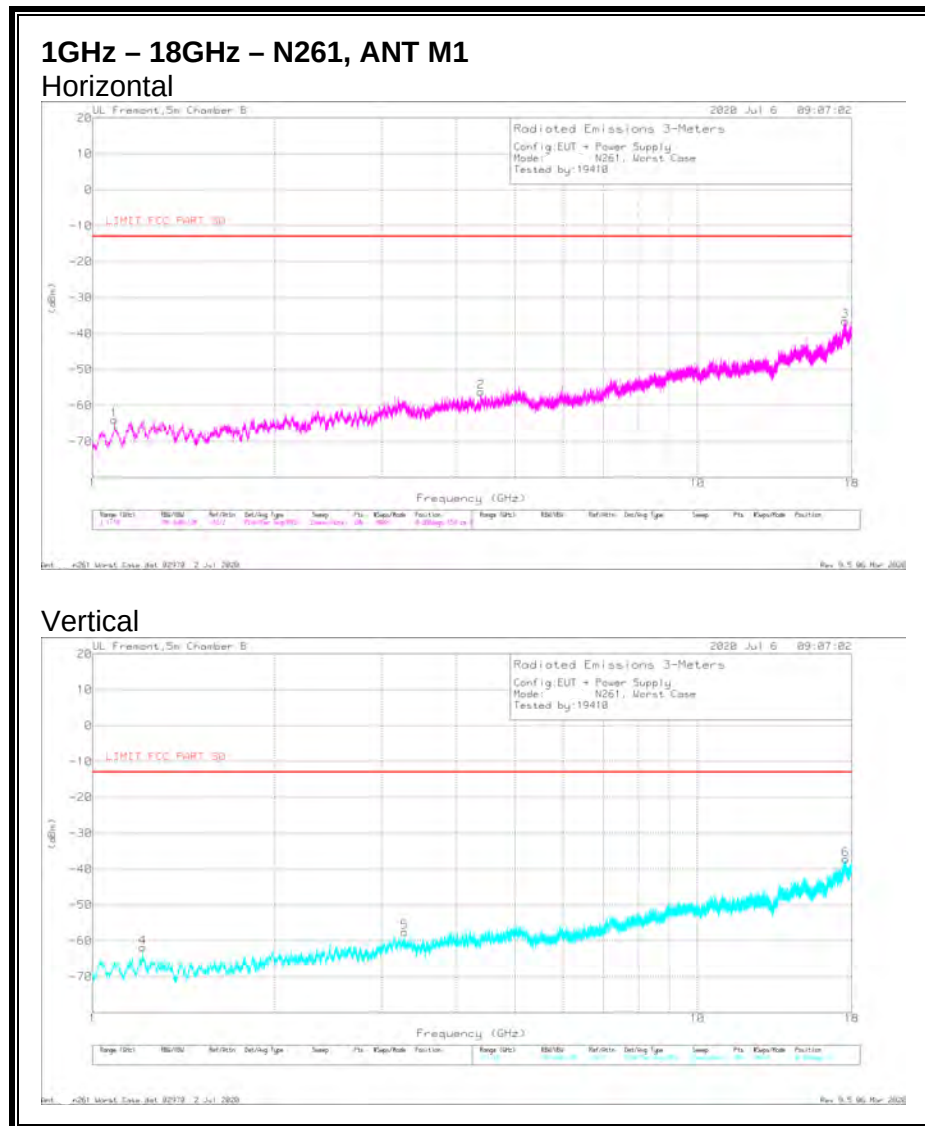

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T962 (dBm)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.08585	-66.68	Pk	24.6	-31.4	9.5	-63.98	-13	-50.98	0-360	150	H
4	1.21039	-66.92	Pk	25.1	-31.1	11.1	-61.82	-13	-48.82	0-360	150	V
5	3.28067	-69.91	Pk	31.4	-28.1	9	-57.61	-13	-44.61	0-360	150	V
2	4.38317	-69.96	Pk	32	-27	8.8	-56.16	-13	-43.16	0-360	150	H
3	17.58264	-75.44	Pk	43	-15.8	11.7	-36.54	-13	-23.54	0-360	150	H
6	17.58944	-75.74	Pk	43	-16	11.5	-37.24	-13	-24.24	0-360	150	V

Pk - Peak detector
Rev 9.5 06 Mar 2020

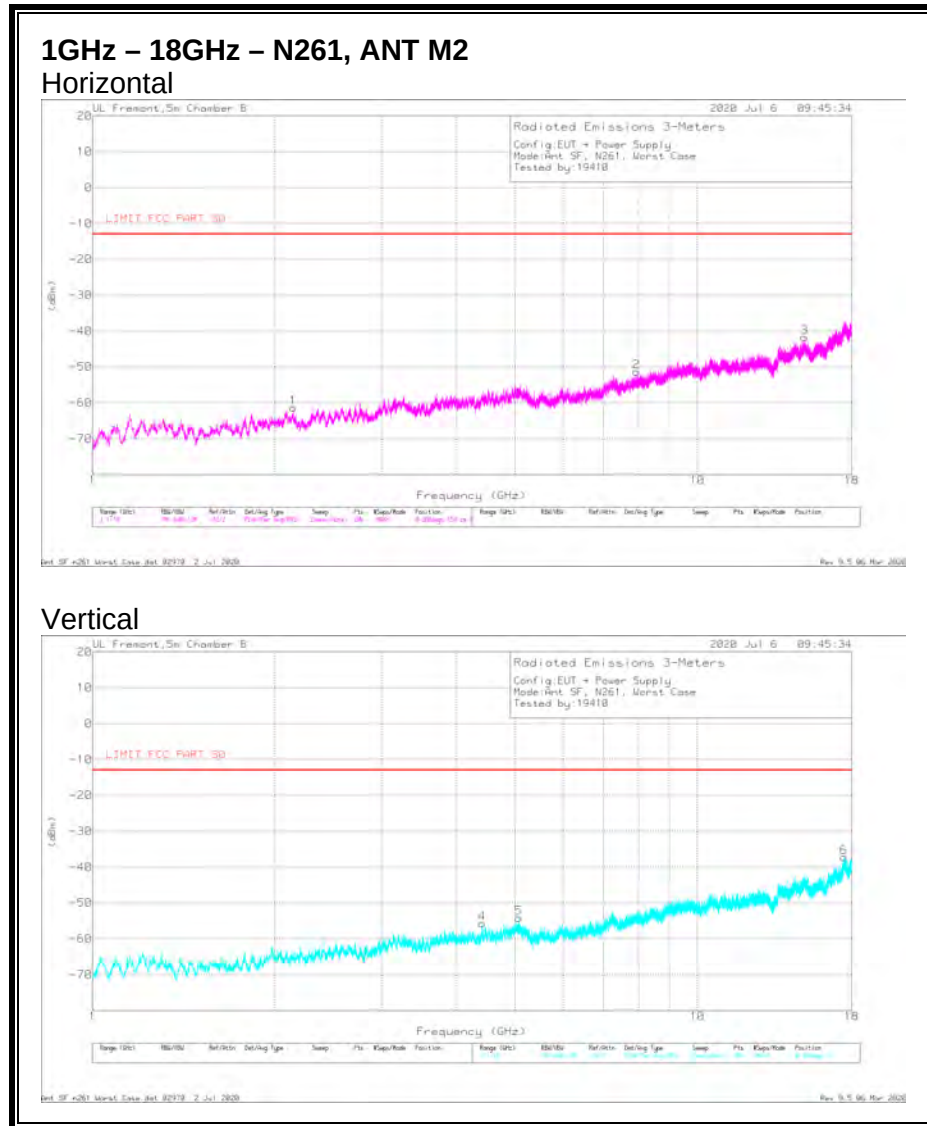


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T962 (dB/m)	Amp/Cbl (dB)	Cbl (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm/MHz)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.14586	-69.55	Pk	26.9	-29.6	10.9	-61.35	-13	-48.35	0-360	150	H
4	4.40867	-70.92	Pk	32	-26.9	10.1	-55.72	-13	-42.72	0-360	150	V
5	5.06576	-70.5	Pk	33.8	-26.2	8.7	-54.2	-13	-41.2	0-360	150	V
2	7.92955	-74.21	Pk	37.2	-22.7	8.4	-51.31	-13	-38.31	0-360	150	H
3	15.04186	-73.9	Pk	42.1	-21.1	11.1	-41.8	-13	-28.8	0-360	150	H
6	17.47043	-74.79	Pk	42.8	-17.2	12	-37.19	-13	-24.19	0-360	150	V


Pk - Peak detector
Rev 9.5 06 Mar 2020

8.4.12. RADIATED EMISSIONS 18-26.5 GHz n261

18-26.5 GHz – N261, ANT M1 Horizontal

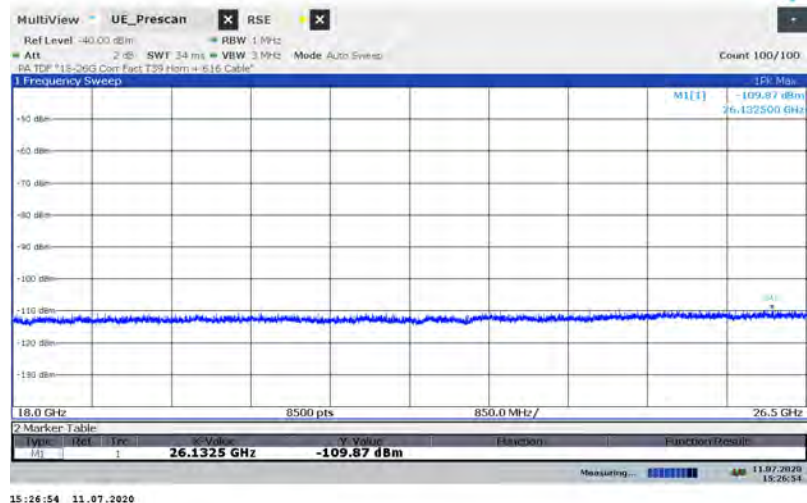


18-26.5 GHz – N261, ANT M1 Vertical

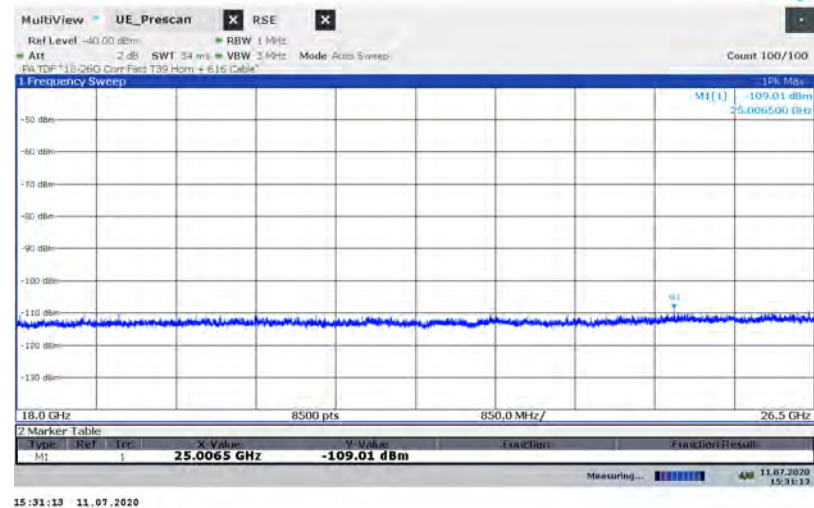


No Emission using Peak Detection.

18-26.5 GHz – N261, ANT M2
Horizontal

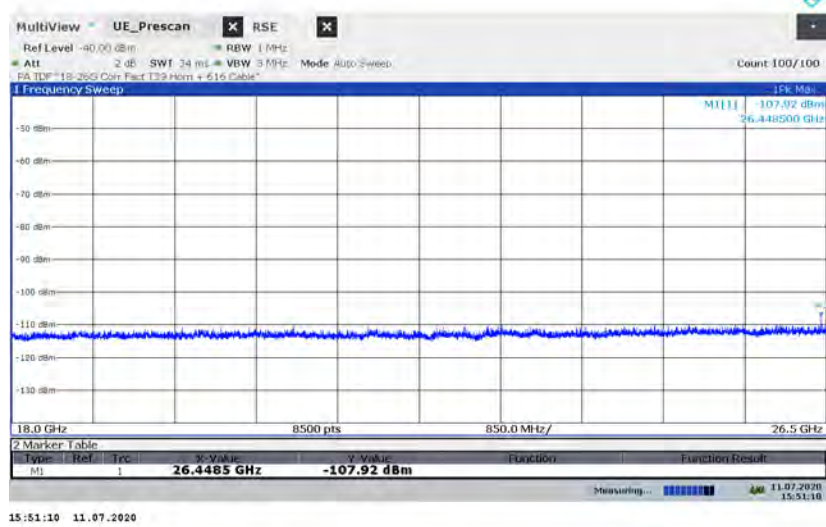

18-26.5 GHz – N261, ANT M2
Vertical

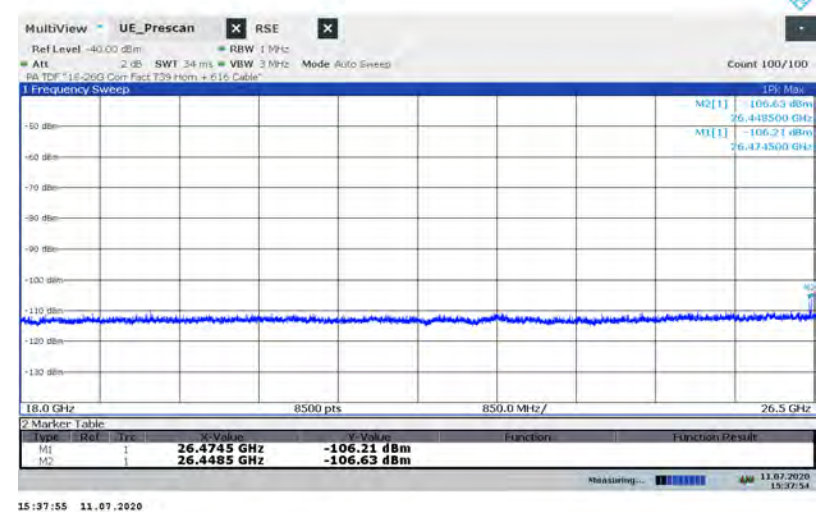

Emission detected using Peak Detection. Avg EIRP was measured.

18-26.5 GHz n261


EIRP Results

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
		(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M2	26.4485	3	H	-113.34	-42.91	-13	-29.91
M2	26.47411	3	V	-113.53	-43.09	-13	-30.09
M2	26.44852	3	V	-115.36	-44.93	-13	-31.93


8.4.13. RADIATED EMISSIONS 26.5-27.5 GHz n261

Note: 27.5-28.35 GHz covered by Fundamental and BE measurements.

26.5-27.5 GHz – N261 ANT M1, 1CC Horizontal

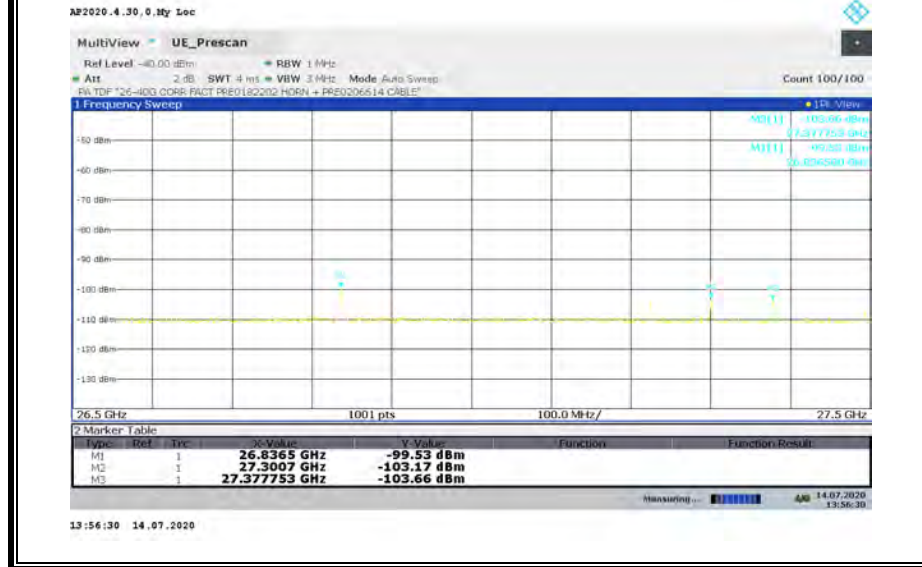


26.5-27.5 GHz – N261 ANT M1, 1CC Vertical

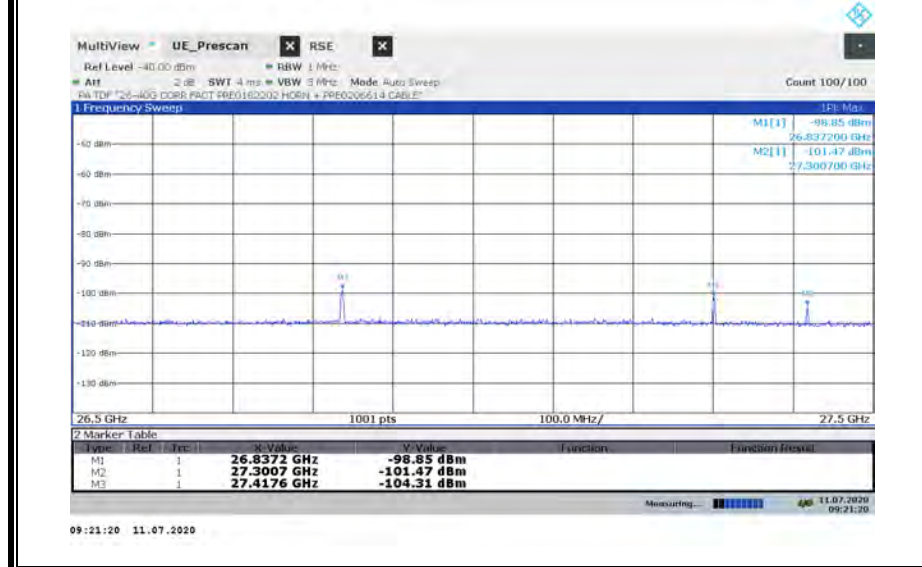


Emission detected using Peak Detection. Avg EIRP was measured.

26.5-27.5 GHz – N261 ANT M2, 1CC Horizontal Full Span

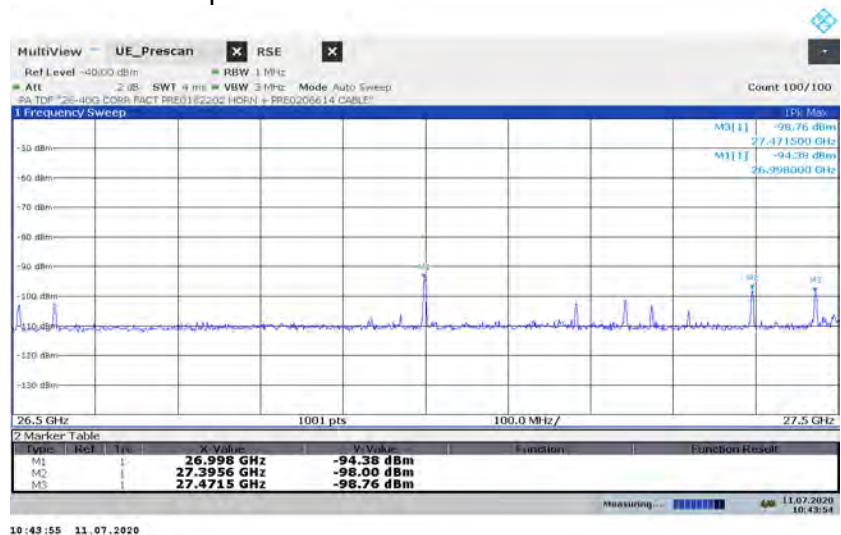

26.5-27.5 GHz – N261 ANT M2, 1CC Vertical Full Span

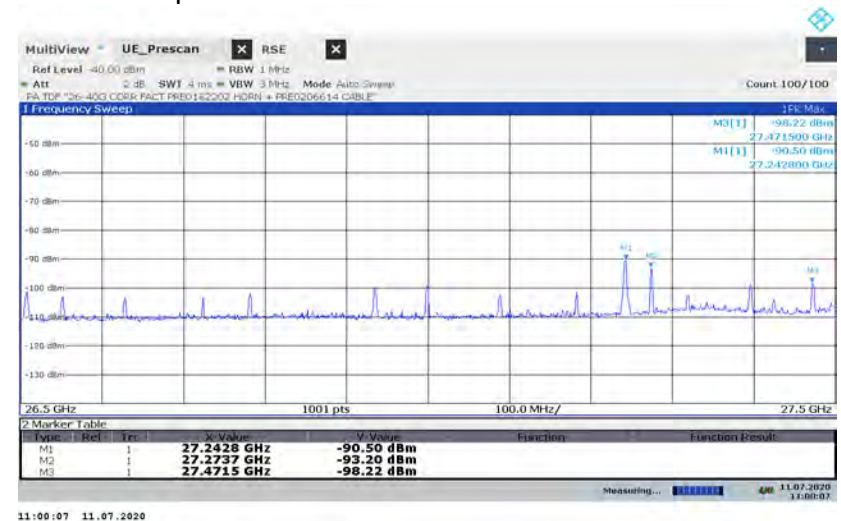


Emission detected using Peak Detection. Avg EIRP was measured.

26.5-27.5 GHz n261

EIRP RESULTS, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
		(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M1	26.83616	3	H	-111.59	-41.04	-13.00	-28.04
M1	26.836291	3	V	-107.74	-37.19	-13.00	-24.19
M1	27.30049	3	H	-106.22	-35.52	-13.00	-22.52
M1	27.30054	3	V	-103.23	-32.53	-13.00	-19.53
M1	27.37741	3	H	-108.91	-38.18	-13.00	-25.18
M1	27.41744	3	V	-106.44	-35.70	-13.00	-22.70
M2	26.998829	3	H	-97.51	-26.90	-13.00	-13.90
M2	27.242031	3	V	-93.86	-23.18	-13.00	-10.18
M2	27.39549	3	H	-102.49	-31.76	-13.00	-18.76
M2	27.27399	3	V	-109.79	-39.10	-13.00	-26.10
M2	27.472419	3	H	-102.95	-32.19	-13.00	-19.19
M2	27.472539	3	V	-103.77	-33.01	-13.00	-20.01

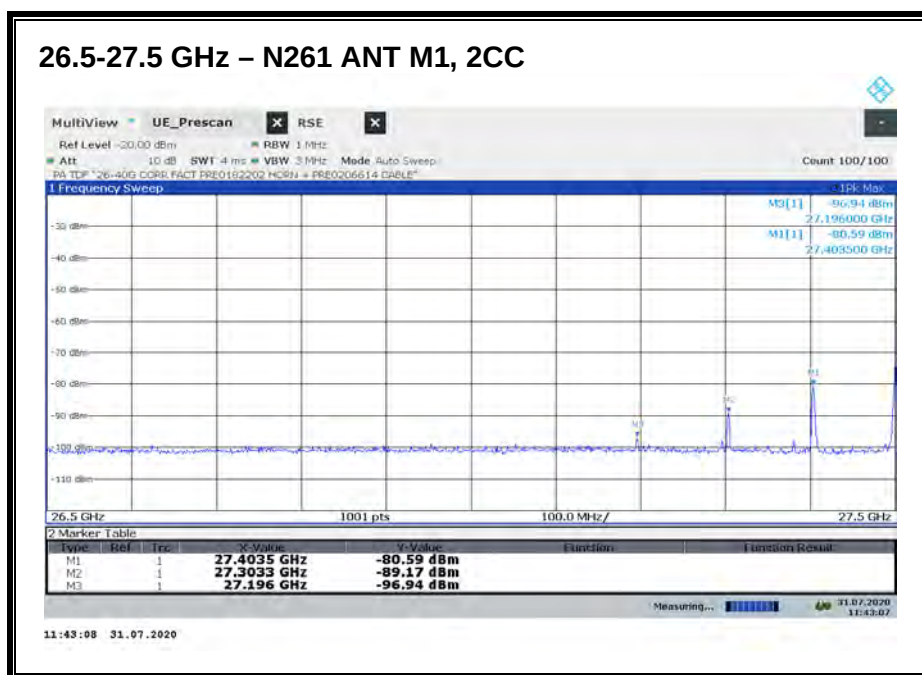

Emissions detected using Peak Detection. Avg EIRP was measured.


EIRP RESULTS, 2CC

Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/0 (1RB-L)

Highest emission in this band was investigated.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M1	27.4033	3	V	-86.68	-15.94	-13	-2.94

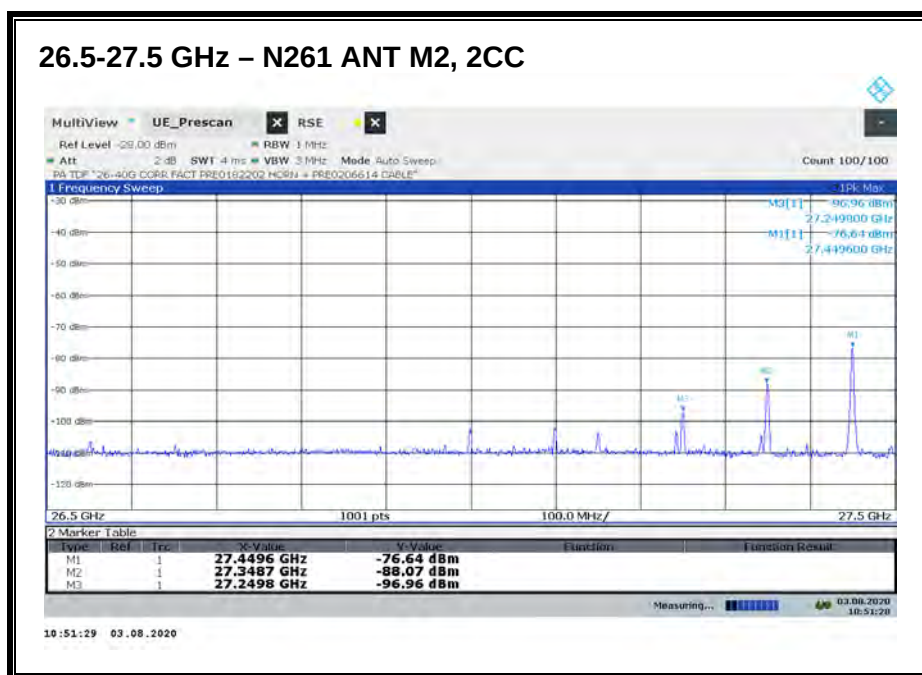

Emissions detected using Peak Detection. Avg EIRP and TRP were measured.

EIRP RESULTS, 2CC

Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/15 (1RB-M)


Highest emission in this band was investigated.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	Meas. TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dBm)	(dBm)	(dB)
M2	27.4496	3	V	-84.54	-13.79	-	-13	-0.79
M2	27.4496	3	-	-	-	-20.02	-13	-7.02


8.4.14. RADIATED EMISSIONS 28.35-30 GHz n261

Note: 27.5-28.35 GHz covered by Fundamental and BE measurements.

28.35-30 GHz – N261 ANT M1 Horizontal

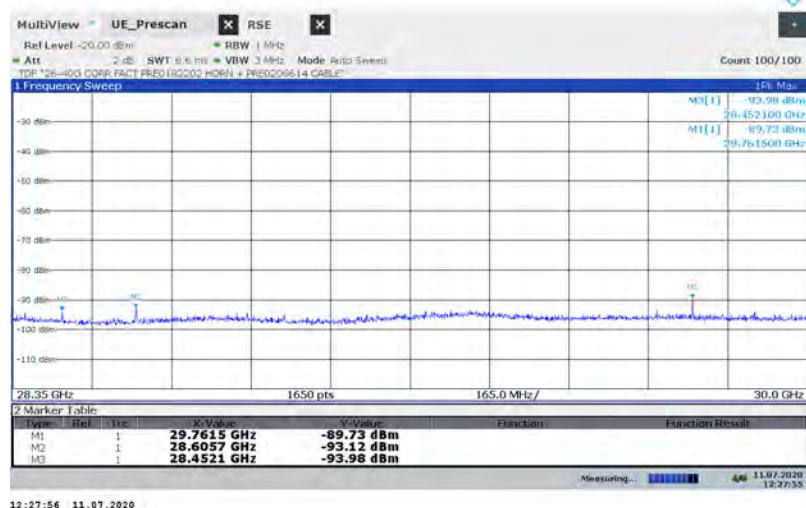


28.35-30 GHz – N261 ANT M1 Vertical

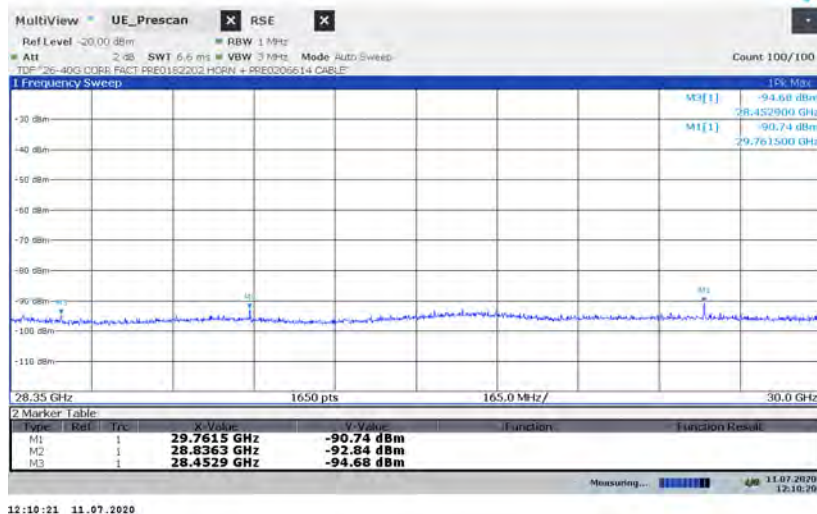

Emissions detected using Peak Detection. Avg EIRP was measured.


28.35-30 GHz – N261 ANT M2

Horizontal

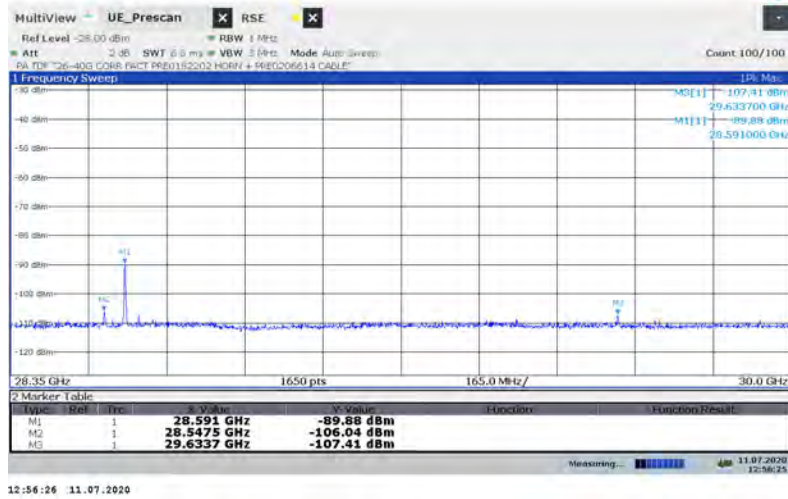

28.35-30 GHz – N261 ANT M2

Vertical

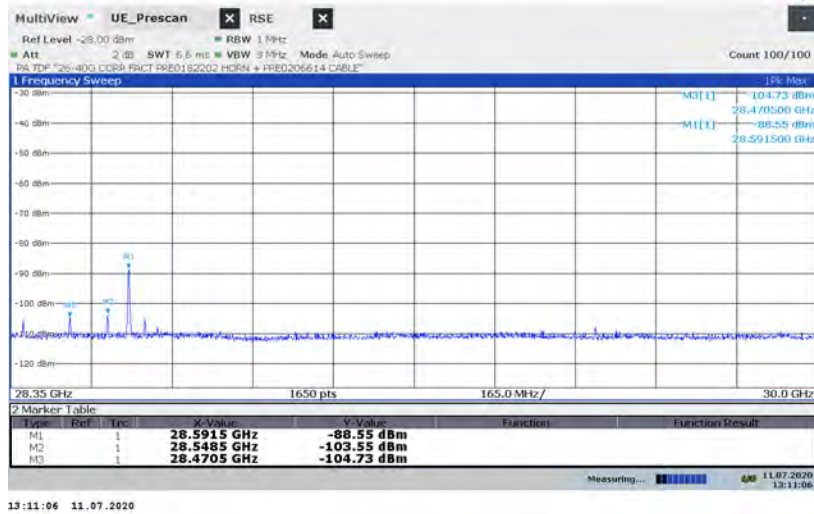

Emissions detected using Peak Detection. Avg EIRP was measured.

28.35-30 GHz n261

EIRP Results

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
M1	29.7616	3	H	-92.99	-21.54	-13	-8.54
M1	29.7615	3	V	-92.29	-20.84	-13	-7.84
M1	28.6063	3	H	-100.63	-29.52	-13	-16.52
M1	28.8367	3	V	-99.01	-27.83	-13	-14.83
M1	28.4525	3	H	-101.82	-30.76	-13	-17.76
M1	28.4525	3	V	-101.56	-30.50	-13	-17.50
M2	28.5914	3	H	-93.1	-22.00	-13	-9.00
M2	28.5913	3	V	-92.8	-21.70	-13	-8.70
M2	28.5475	3	H	-114.24	-43.15	-13	-30.15
M2	28.5480	3	V	-113.44	-42.35	-13	-29.35
M2	29.6336	3	H	-118.15	-46.73	-13	-33.73
M2	28.4710	3	V	-110.51	-39.44	-13	-26.44

8.4.15. RADIATED EMISSIONS 30-40 GHz n261

30-40 GHz – N261 ANT M1

Horizontal Full Span





30-40 GHz – N261 ANT M1

Vertical Full Span





No Emission using Peak Detection.

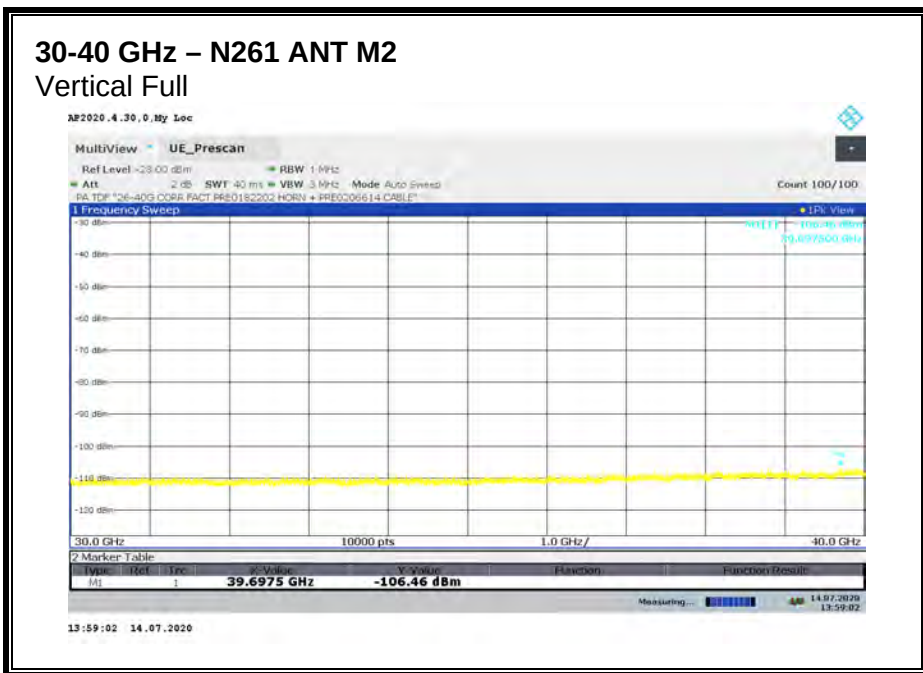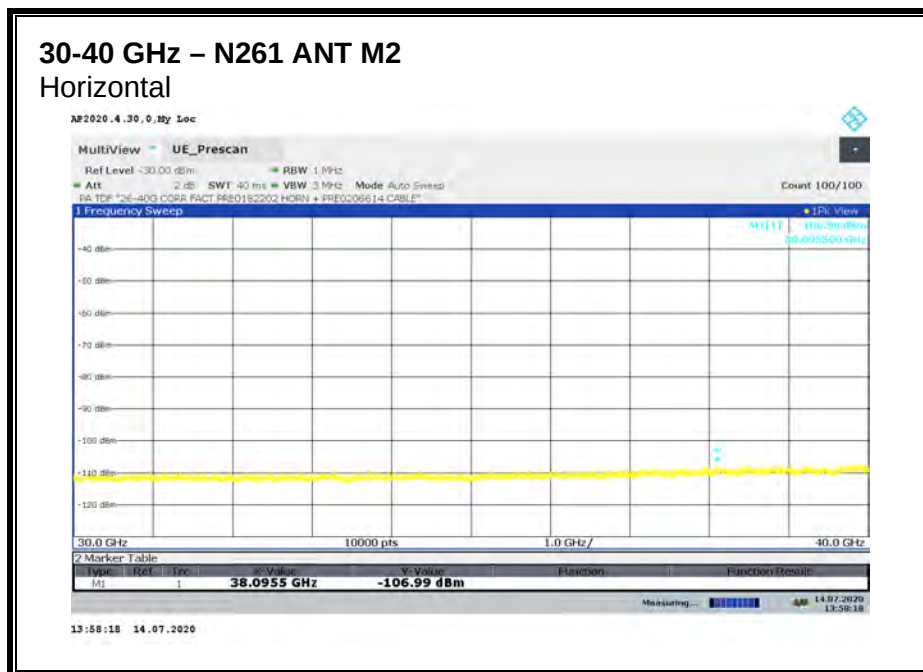

No Emission using Peak Detection.


8.4.16. RADIATED EMISSIONS 40-50 GHz n261

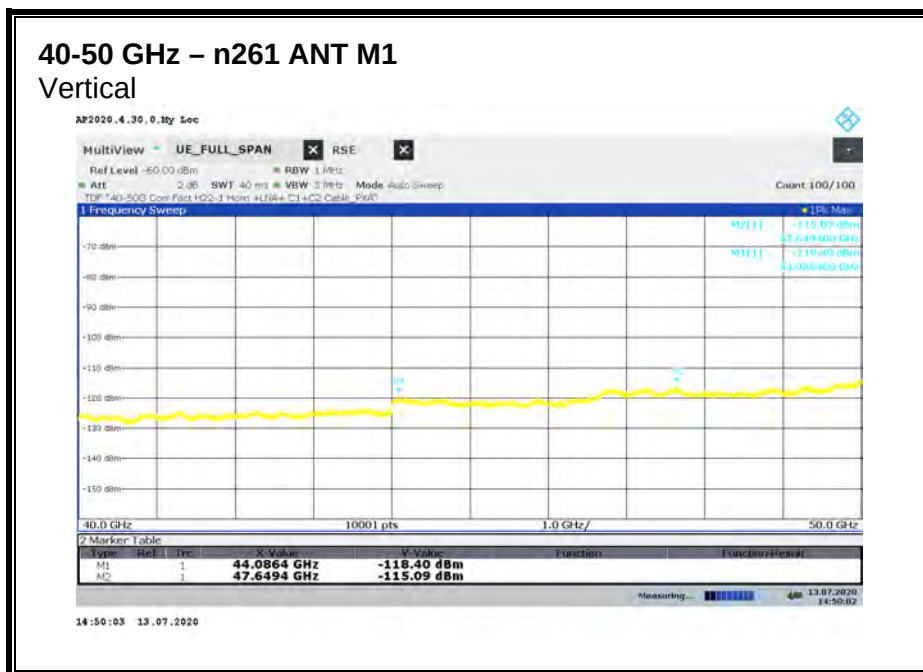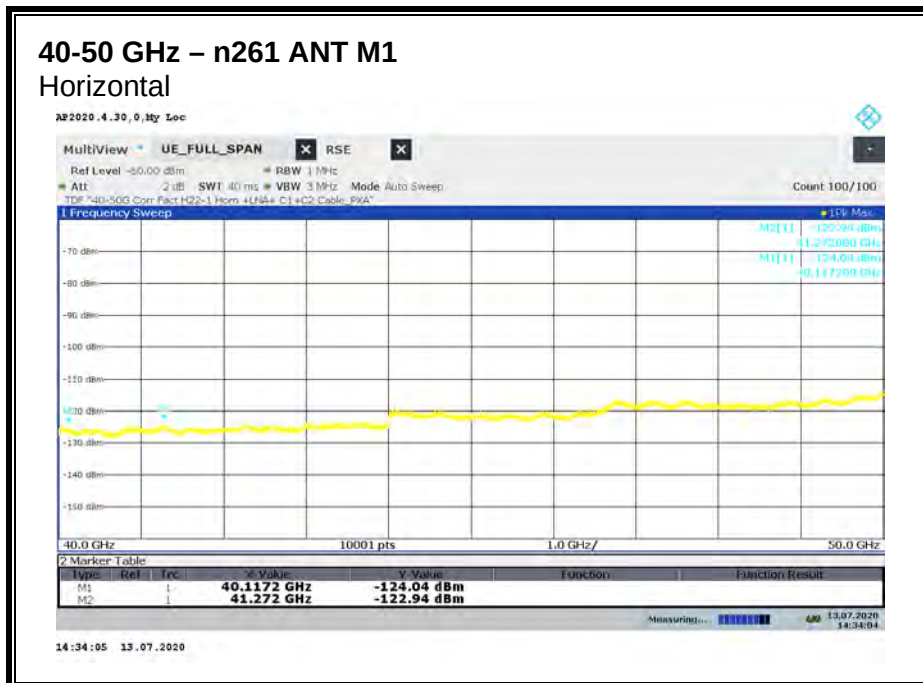

No Emission using Peak Detection.

40-50 GHz – n261 ANT M2

Horizontal

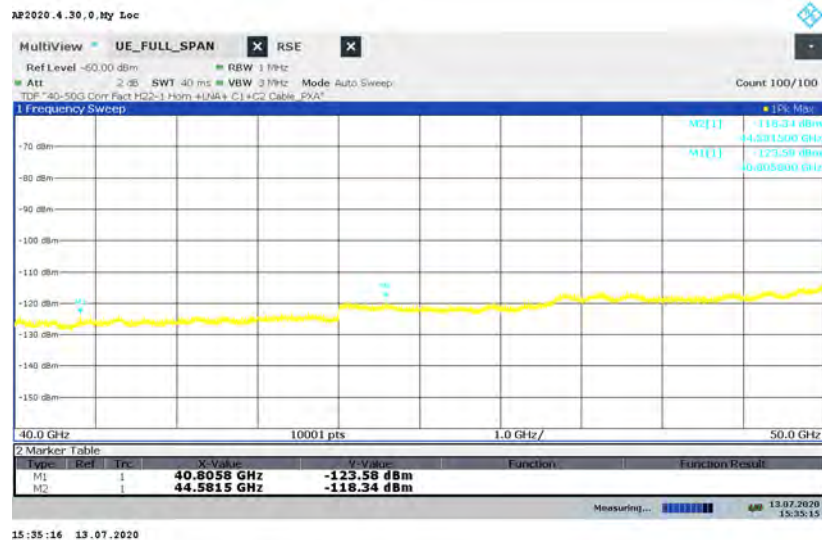

40-50 GHz – n261 ANT M2


Vertical




No Emission using Peak Detection.

8.4.17. RADIATED EMISSIONS 50-75 GHz n261

50-75 GHz – N261 ANT M1 Horizontal

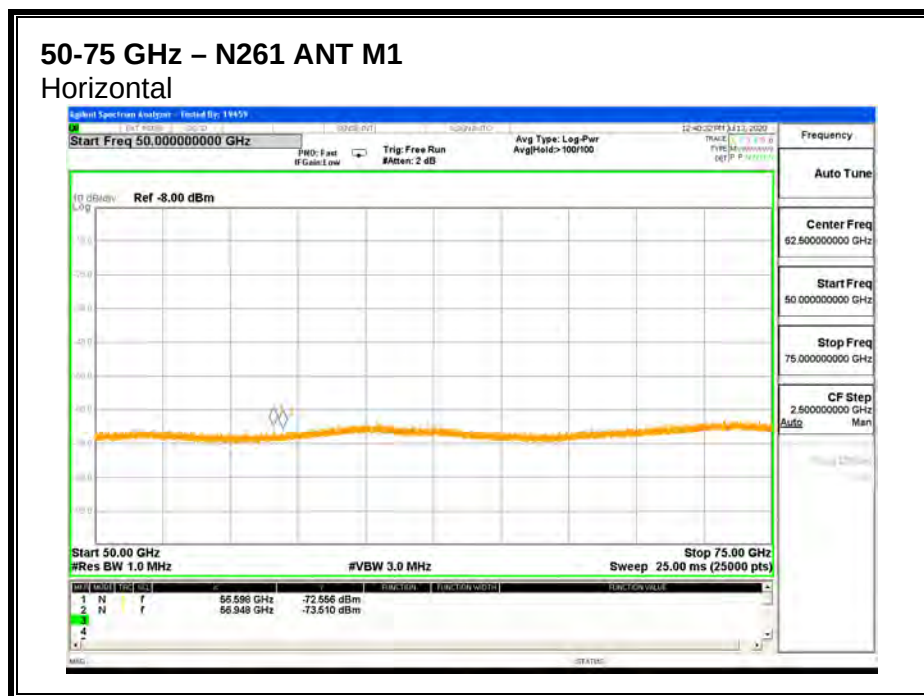

50-75 GHz – N261 ANT M1 Vertical

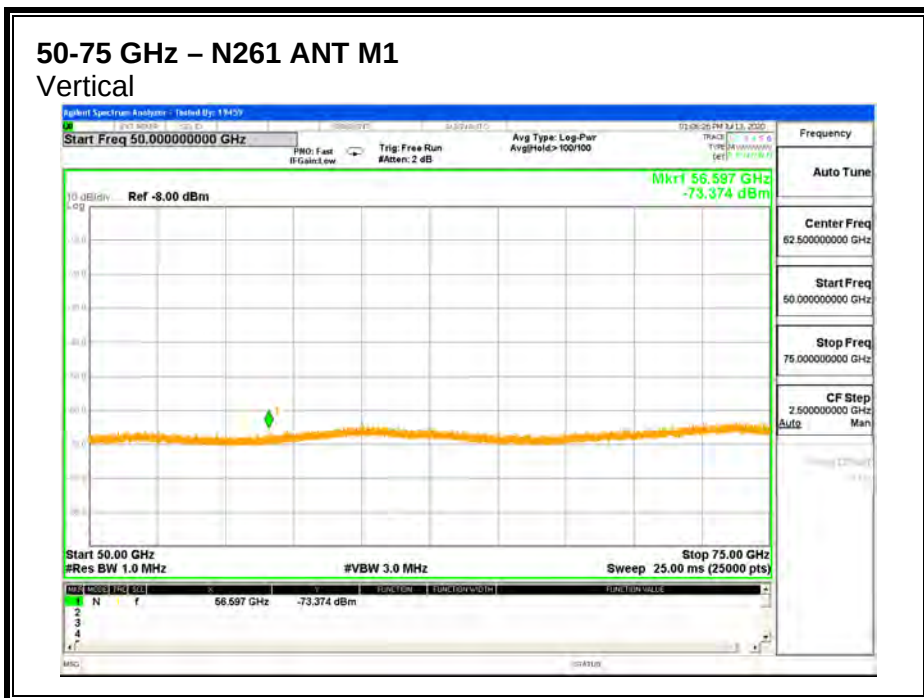


Emissions detected using Peak Detection. Avg EIRP was measured.

50-75 GHz – N261 ANT M2
Horizontal



50-75 GHz – N261 ANT M2
Vertical

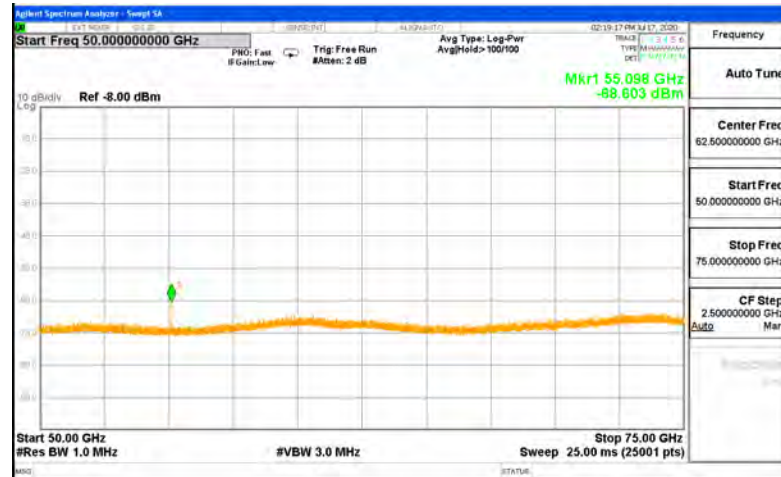

Emissions detected using Peak Detection. Avg EIRP was measured.


50-75 GHz n261

EIRP Results

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M1	56.59773	1.5	V	-75.406	-27.29	-13	-14.29
M1	56.59779	1.5	H	-76.977	-28.86	-13	-15.86
M2	55.09826	1.5	H	-76.633	-28.65	-13	-15.65
M2	55.09804	1.5	V	-70.525	-22.54	-13	-9.54

8.4.18. RADIATED EMISSIONS 75-100 GHz n261

75-100 GHz – N261, ANT M1 Horizontal

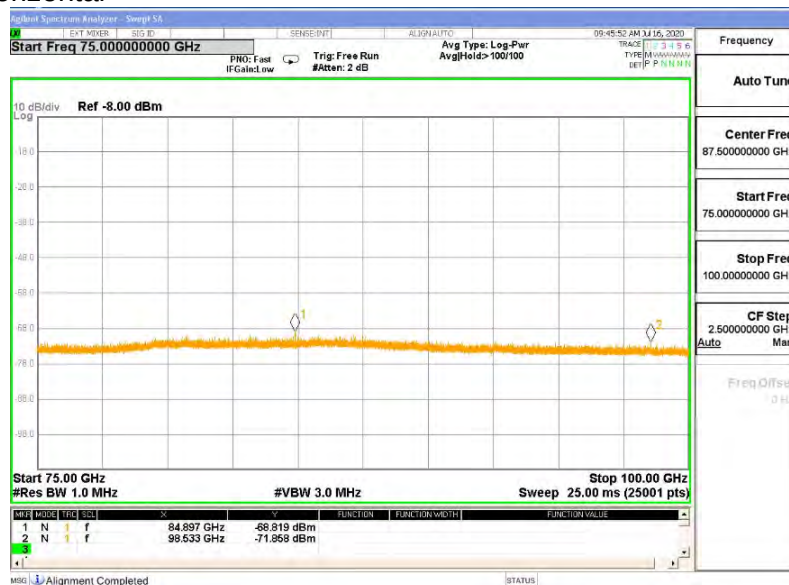

75-100 GHz – N261, ANT M1 Vertical



Emissions detected using Peak Detection. Avg EIRP was measured

75-100 GHz – N261, ANT M2
Vertical



75-100 GHz – N261, ANT M2
Vertical



Emissions detected using Peak Detection. Avg EIRP was measured

75-100 GHz n261

EIRP Results

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Meas. Power	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M1	84.90	1	H	-74.913	-26.90	-13	-13.90
M1	84.90	1	V	-72.161	-24.15	-13	-11.15
M2	82.65	1	H	-69.165	-21.28	-13	-8.28
M2	82.65	1	V	-72.092	-24.21	-13	-11.21

8.5. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055

LIMIT

For reporting purposes only

TEST PROCEDURES

KDB 842590 D01 Upper Microwave Flexible Use Service v01 Section 4.5
ANSI C63.26-2015 Section 5.6

Test procedures for temperature variation:

- a. Position the EUT in temperature/humidity chamber with power off.
 - b. Set chamber temperature to -30°C and stabilize the EUT for at least 30 minutes.
 - c. Record maximum change in frequency within one minute after powering the EUT.
 - d. Increase chamber temperature at 10°C intervals from -30°C to 50°C. Record maximum change in frequency at each temperature.
 - e. A period of at least 30 minutes is provided to allow stabilization of the equipment at each temperature level.
- Temp. = -30°C to +50°C

Test procedures for voltage variation:

- a. Position the EUT in temperature/humidity chamber with power off.
 - b. Set chamber temperature to 20°C.
 - c. Record maximum frequency change within one minute after powering the EUT.
 - d. The primary supply voltage is varied from 85% to 115% of the nominal value for hand-carried, battery-powered equipment. primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
- Voltage = (85% - 115%)
Nominal: 3.8 VDC; Low: 3.23 VDC; High: 4.37 VDC.

The measurements were performed with the CW signal of the center frequency of n260 on antenna M2 and n261 bands on antenna M1, to represent Chipset 2 and Chipset 1 respectively.

RESULTS

See the following page.

TESTED BY:

Employee ID: 19459

RESULTS

			Antenna M2 _ N260	
Input Voltage	Environment	Frequency	Frequency	Delta
	Temperature (°C)	(Hz)	(MHz)	(kHz)
Normal	50	38504758114	38504.7581140	-45.808
Normal	40	38504690028	38504.6900280	-113.894
Normal	30	38504723703	38504.7237030	-80.219
Normal	20	38504803922	38504.8039220	Reference
Normal	10	38505039381	38505.0393810	235.459
Normal	0	38505017246	38505.0172460	213.324
Normal	-10	38505109240	38505.1092400	305.318
Normal	-20	38505116416	38505.1164160	312.494
Normal	-30	38505101603	38505.1016030	297.681
115%	20	38504792255	38504.7922550	-11.667
85%	20	38504787692	38504.7876920	-16.230

			Antenna M1 _ N261	
Input Voltage	Environment	Frequency	Frequency	Delta
	Temperature (°C)	(Hz)	(MHz)	(kHz)
Normal	50	27929998360	27929.9983600	118.384
Normal	40	27929821899	27929.8218990	-58.077
Normal	30	27929832336	27929.8323360	-47.640
Normal	20	27929879976	27929.8799760	Reference
Normal	10	27929948231	27929.9482310	68.255
Normal	0	27930056771	27930.0567710	176.795
Normal	-10	27930109930	27930.1099300	229.954
Normal	-20	27930151809	27930.1518090	271.833
Normal	-30	27930157330	27930.1573300	277.354
115%	20	27929848684	27929.8486840	-31.292
85%	20	27929858728	27929.8587280	-21.248

9. SETUP PHOTOS

Please refer to 13179116-EP20V1 for setup photos.

END OF REPORT

APPENDIX A

1. 50-80 GHz Keysight M1970V

	Keysight Technologies Malaysia Sdn Bhd (403512-06) Bayan Lepas Free Industrial Zone 11900 Penang, Malaysia Keysight Approved Calibration provider #71454	
Certificate Of Calibration		
Certificate No: M1970V/MY5139063020190020		
Manufacturer: Keysight Technologies Model No: M1970V Options Installed With Specifications: 002	Description: Waveguide Harmonic Mixer Serial No: MY51390630	
Customer Asset: Customer: UL LLC 47173 Benicia St FREMONT CA 94538-7366 UNITED STATES	Location of Calibration: Plot 44, Bayan Lepas Industrial Park IV 11900 Penang Malaysia	
Date of Calibration: 20-AUG-2019 Temperature: (23 ± 3)°C Procedure: MTA-T0264	Received Date: 20-AUG-2019 Humidity: (20 to 70) % RH	
This certifies that the equipment has been calibrated using applicable Keysight Technologies procedures in compliance with a quality management system registered to ISO 9001:2015.		
As Received Conditions: Initial testing found the equipment to be IN SPECIFICATION at the points tested.		
Action Taken: No corrective actions were necessary.		
As Shipped Conditions: At the completion of calibration, measured values were IN SPECIFICATION at the parameters tested.		
Remarks or special requirements:		
Notes: 1. This calibration report may refer to equipment manufactured by HP, Agilent and Keysight as being manufactured by Keysight Technologies, Inc. 2. The test limits stated in the calibration report correspond to the published specifications of the equipment, at the points limited. 3. The documented test results relate to the equipment tested only. 4. This calibration report shall not be reproduced, except in full.		
Traceability Information: Measurements are traceable to the International System of Units (SI) via national metrology institutes (www.keysight.com/find/NMI) that are signatories to the CIPM Mutual Recognition Arrangement.		
 Page 1 of 2		

	Keysight Technologies Malaysia Sdn Bhd (403512-06) Bayan Lepas Free Industrial Zone 11900 Penang, Malaysia Keysight Approved Calibration provider #71454	
Certificate Of Calibration		
Certificate No: M1970V/MY5139063020190020		
Calibration Equipment Used: Model Number Model Description	Date used: Date equipment used in this Calibration Equipment ID Used Date Cal Due Date	
85640A PNA Signal Analyzer	85640A	20-AUG-2019 24-SEP-2019
85640B PNA Signal Analyzer	85640B	20-AUG-2019 18-SEP-2019
85640C PNA Signal Analyzer	85640C	20-AUG-2019 02-OCT-2019
85640D PNA Signal Analyzer	85640D	20-AUG-2019 24-NOV-2019
85640E PNA Signal Analyzer	85640E	20-AUG-2019 18-DEC-2019
85640F PNA Signal Analyzer	85640F	20-AUG-2019 18-DEC-2019
85640G PNA Signal Analyzer	85640G	20-AUG-2019 18-DEC-2019
85640H PNA Signal Analyzer	85640H	20-AUG-2019 18-DEC-2019
85640I PNA Signal Analyzer	85640I	20-AUG-2019 18-DEC-2019
85640J PNA Signal Analyzer	85640J	20-AUG-2019 18-DEC-2019
85640K PNA Signal Analyzer	85640K	20-AUG-2019 18-DEC-2019
85640L PNA Signal Analyzer	85640L	20-AUG-2019 18-DEC-2019
85640M PNA Signal Analyzer	85640M	20-AUG-2019 18-DEC-2019
85640N PNA Signal Analyzer	85640N	20-AUG-2019 18-DEC-2019
85640O PNA Signal Analyzer	85640O	20-AUG-2019 18-DEC-2019
85640P PNA Signal Analyzer	85640P	20-AUG-2019 18-DEC-2019
85640Q PNA Signal Analyzer	85640Q	20-AUG-2019 18-DEC-2019
85640R PNA Signal Analyzer	85640R	20-AUG-2019 18-DEC-2019
85640S PNA Signal Analyzer	85640S	20-AUG-2019 18-DEC-2019
85640T PNA Signal Analyzer	85640T	20-AUG-2019 18-DEC-2019
85640U PNA Signal Analyzer	85640U	20-AUG-2019 18-DEC-2019
85640V PNA Signal Analyzer	85640V	20-AUG-2019 18-DEC-2019
85640W PNA Signal Analyzer	85640W	20-AUG-2019 18-DEC-2019
85640X PNA Signal Analyzer	85640X	20-AUG-2019 18-DEC-2019
85640Y PNA Signal Analyzer	85640Y	20-AUG-2019 18-DEC-2019
85640Z PNA Signal Analyzer	85640Z	20-AUG-2019 18-DEC-2019
85641A PNA Signal Analyzer	85641A	20-AUG-2019 18-DEC-2019
85641B PNA Signal Analyzer	85641B	20-AUG-2019 18-DEC-2019
85641C PNA Signal Analyzer	85641C	20-AUG-2019 18-DEC-2019
85641D PNA Signal Analyzer	85641D	20-AUG-2019 18-DEC-2019
85641E PNA Signal Analyzer	85641E	20-AUG-2019 18-DEC-2019
85641F PNA Signal Analyzer	85641F	20-AUG-2019 18-DEC-2019
85641G PNA Signal Analyzer	85641G	20-AUG-2019 18-DEC-2019
85641H PNA Signal Analyzer	85641H	20-AUG-2019 18-DEC-2019
85641I PNA Signal Analyzer	85641I	20-AUG-2019 18-DEC-2019
85641J PNA Signal Analyzer	85641J	20-AUG-2019 18-DEC-2019
85641K PNA Signal Analyzer	85641K	20-AUG-2019 18-DEC-2019
85641L PNA Signal Analyzer	85641L	20-AUG-2019 18-DEC-2019
85641M PNA Signal Analyzer	85641M	20-AUG-2019 18-DEC-2019
85641N PNA Signal Analyzer	85641N	20-AUG-2019 18-DEC-2019
85641O PNA Signal Analyzer	85641O	20-AUG-2019 18-DEC-2019
85641P PNA Signal Analyzer	85641P	20-AUG-2019 18-DEC-2019
85641Q PNA Signal Analyzer	85641Q	20-AUG-2019 18-DEC-2019
85641R PNA Signal Analyzer	85641R	20-AUG-2019 18-DEC-2019
85641S PNA Signal Analyzer	85641S	20-AUG-2019 18-DEC-2019
85641T PNA Signal Analyzer	85641T	20-AUG-2019 18-DEC-2019
85641U PNA Signal Analyzer	85641U	20-AUG-2019 18-DEC-2019
85641V PNA Signal Analyzer	85641V	20-AUG-2019 18-DEC-2019
85641W PNA Signal Analyzer	85641W	20-AUG-2019 18-DEC-2019
85641X PNA Signal Analyzer	85641X	20-AUG-2019 18-DEC-2019
85641Y PNA Signal Analyzer	85641Y	20-AUG-2019 18-DEC-2019
85641Z PNA Signal Analyzer	85641Z	20-AUG-2019 18-DEC-2019
85642A PNA Signal Analyzer	85642A	20-AUG-2019 18-DEC-2019
85642B PNA Signal Analyzer	85642B	20-AUG-2019 18-DEC-2019
85642C PNA Signal Analyzer	85642C	20-AUG-2019 18-DEC-2019
85642D PNA Signal Analyzer	85642D	20-AUG-2019 18-DEC-2019
85642E PNA Signal Analyzer	85642E	20-AUG-2019 18-DEC-2019
85642F PNA Signal Analyzer	85642F	20-AUG-2019 18-DEC-2019
85642G PNA Signal Analyzer	85642G	20-AUG-2019 18-DEC-2019
85642H PNA Signal Analyzer	85642H	20-AUG-2019 18-DEC-2019
85642I PNA Signal Analyzer	85642I	20-AUG-2019 18-DEC-2019
85642J PNA Signal Analyzer	85642J	20-AUG-2019 18-DEC-2019
85642K PNA Signal Analyzer	85642K	20-AUG-2019 18-DEC-2019
85642L PNA Signal Analyzer	85642L	20-AUG-2019 18-DEC-2019
85642M PNA Signal Analyzer	85642M	20-AUG-2019 18-DEC-2019
85642N PNA Signal Analyzer	85642N	20-AUG-2019 18-DEC-2019
85642O PNA Signal Analyzer	85642O	20-AUG-2019 18-DEC-2019
85642P PNA Signal Analyzer	85642P	20-AUG-2019 18-DEC-2019
85642Q PNA Signal Analyzer	85642Q	20-AUG-2019 18-DEC-2019
85642R PNA Signal Analyzer	85642R	20-AUG-2019 18-DEC-2019
85642S PNA Signal Analyzer	85642S	20-AUG-2019 18-DEC-2019
85642T PNA Signal Analyzer	85642T	20-AUG-2019 18-DEC-2019
85642U PNA Signal Analyzer	85642U	20-AUG-2019 18-DEC-2019
85642V PNA Signal Analyzer	85642V	20-AUG-2019 18-DEC-2019
85642W PNA Signal Analyzer	85642W	20-AUG-2019 18-DEC-2019
85642X PNA Signal Analyzer	85642X	20-AUG-2019 18-DEC-2019
85642Y PNA Signal Analyzer	85642Y	20-AUG-2019 18-DEC-2019
85642Z PNA Signal Analyzer	85642Z	20-AUG-2019 18-DEC-2019
85643A PNA Signal Analyzer	85643A	20-AUG-2019 18-DEC-2019
85643B PNA Signal Analyzer	85643B	20-AUG-2019 18-DEC-2019
85643C PNA Signal Analyzer	85643C	20-AUG-2019 18-DEC-2019
85643D PNA Signal Analyzer	85643D	20-AUG-2019 18-DEC-2019
85643E PNA Signal Analyzer	85643E	20-AUG-2019 18-DEC-2019
85643F PNA Signal Analyzer	85643F	20-AUG-2019 18-DEC-2019
85643G PNA Signal Analyzer	85643G	20-AUG-2019 18-DEC-2019
85643H PNA Signal Analyzer	85643H	20-AUG-2019 18-DEC-2019
85643I PNA Signal Analyzer	85643I	20-AUG-2019 18-DEC-2019
85643J PNA Signal Analyzer	85643J	20-AUG-2019 18-DEC-2019
85643K PNA Signal Analyzer	85643K	20-AUG-2019 18-DEC-2019
85643L PNA Signal Analyzer	85643L	20-AUG-2019 18-DEC-2019
85643M PNA Signal Analyzer	85643M	20-AUG-2019 18-DEC-2019
85643N PNA Signal Analyzer	85643N	20-AUG-2019 18-DEC-2019
85643O PNA Signal Analyzer	85643O	20-AUG-2019 18-DEC-2019
85643P PNA Signal Analyzer	85643P	20-AUG-2019 18-DEC-2019
85643Q PNA Signal Analyzer	85643Q	20-AUG-2019 18-DEC-2019
85643R PNA Signal Analyzer	85643R	20-AUG-2019 18-DEC-2019
85643S PNA Signal Analyzer	85643S	20-AUG-2019 18-DEC-2019
85643T PNA Signal Analyzer	85643T	20-AUG-2019 18-DEC-2019
85643U PNA Signal Analyzer	85643U	20-AUG-2019 18-DEC-2019
85643V PNA Signal Analyzer	85643V	20-AUG-2019 18-DEC-2019
85643W PNA Signal Analyzer	85643W	20-AUG-2019 18-DEC-2019
85643X PNA Signal Analyzer	85643X	20-AUG-2019 18-DEC-2019
85643Y PNA Signal Analyzer	85643Y	20-AUG-2019 18-DEC-2019
85643Z PNA Signal Analyzer	85643Z	20-AUG-2019 18-DEC-2019
85644A PNA Signal Analyzer	85644A	20-AUG-2019 18-DEC-2019
85644B PNA Signal Analyzer	85644B	20-AUG-2019 18-DEC-2019
85644C PNA Signal Analyzer	85644C	20-AUG-2019 18-DEC-2019
85644D PNA Signal Analyzer	85644D	20-AUG-2019 18-DEC-2019
85644E PNA Signal Analyzer	85644E	20-AUG-2019 18-DEC-2019
85644F PNA Signal Analyzer	85644F	20-AUG-2019 18-DEC-2019
85644G PNA Signal Analyzer	85644G	20-AUG-2019 18-DEC-2019
85644H PNA Signal Analyzer	85644H	20-AUG-2019 18-DEC-2019
85644I PNA Signal Analyzer	85644I	20-AUG-2019 18-DEC-2019
85644J PNA Signal Analyzer	85644J	20-AUG-2019 18-DEC-2019
85644K PNA Signal Analyzer	85644K	20-AUG-2019 18-DEC-2019
85644L PNA Signal Analyzer	85644L	20-AUG-2019 18-DEC-2019
85644M PNA Signal Analyzer	85644M	20-AUG-2019 18-DEC-2019
85644N PNA Signal Analyzer	85644N	20-AUG-2019 18-DEC-2019
85644O PNA Signal Analyzer	85644O	20-AUG-2019 18-DEC-2019
85644P PNA Signal Analyzer	85644P	20-AUG-2019 18-DEC-2019
85644Q PNA Signal Analyzer	85644Q	20-AUG-2019 18-DEC-2019
85644R PNA Signal Analyzer	85644R	20-AUG-2019 18-DEC-2019
85644S PNA Signal Analyzer	85644S	20-AUG-2019 18-DEC-2019
85644T PNA Signal Analyzer	85644T	20-AUG-2019 18-DEC-2019
85644U PNA Signal Analyzer	85644U	20-AUG-2019 18-DEC-2019
85644V PNA Signal Analyzer	85644V	20-AUG-2019 18-DEC-2019
85644W PNA Signal Analyzer	85644W	20-AUG-2019 18-DEC-2019
85644X PNA Signal Analyzer	85644X	20-AUG-2019 18-DEC-2019
85644Y PNA Signal Analyzer	85644Y	20-AUG-2019 18-DEC-2019
85644Z PNA Signal Analyzer	85644Z	20-AUG-2019 18-DEC-2019
85645A PNA Signal Analyzer	85645A	20-AUG-2019 18-DEC-2019
85645B PNA Signal Analyzer	85645B	20-AUG-2019 18-DEC-2019
85645C PNA Signal Analyzer	85645C	20-AUG-2019 18-DEC-2019
85645D PNA Signal Analyzer	85645D	20-AUG-2019 18-DEC-2019
85645E PNA Signal Analyzer	85645E	20-AUG-2019 18-DEC-2019
85645F PNA Signal Analyzer	85645F	20-AUG-2019 18-DEC-2019
85645G PNA Signal Analyzer	85645G	20-AUG-2019 18-DEC-2019
85645H PNA Signal Analyzer	85645H	20-AUG-2019 18-DEC-2019
85645I PNA Signal Analyzer	85645I	20-AUG-2019 18-DEC-2019
85645J PNA Signal Analyzer	85645J	20-AUG-2019 18-DEC-2019
85645K PNA Signal Analyzer	85645K	20-AUG-2019 18-DEC-2019
85645L PNA Signal Analyzer	85645L	20-AUG-2019 18-DEC-2019
85645M PNA Signal Analyzer	85645M	20-AUG-2019 18-DEC-2019
85645N PNA Signal Analyzer	85645N	20-AUG-2019 18-DEC-2019
85645O PNA Signal Analyzer	85645O	20-AUG-2019 18-DEC-2019
85645P PNA Signal Analyzer	85645P	20-AUG-2019 18-DEC-2019
85645Q PNA Signal Analyzer	85645Q	20-AUG-2019 18-DEC-2019
85645R PNA Signal Analyzer	85645R	20-AUG-2019 18-DEC-2019
85645S PNA Signal Analyzer	85645S	20-AUG-2019 18-DEC-2019
85645T PNA Signal Analyzer	85645T	20-AUG-2019 18-DEC-2019
85645U PNA Signal Analyzer	85645U	20-AUG-2019 18-DEC-2019
85645V PNA Signal Analyzer	85645V	20-AUG-2019 18-DEC-2019
85645W PNA Signal Analyzer	85645W	20-AUG-2019 18-DEC-2019
85645X PNA Signal Analyzer	85645X	20-AUG-2019 18-DEC-2019
85645Y PNA Signal Analyzer	85645Y	20-AUG-2019 18-DEC-2019
85645Z PNA Signal Analyzer	85645Z	20-AUG-2019 18-DEC-2019
85646A PNA Signal Analyzer	85646A	20-AUG-2019 18-DEC-2019
85646B PNA Signal Analyzer	85646B	20-AUG-2019 18-DEC-2019
85646C PNA Signal Analyzer	85646C	20-AUG-2019 18-DEC-2019
85646D PNA Signal Analyzer	85646D	20-AUG-2019 18-DEC-2019
85646E PNA Signal Analyzer	85646E	20-AUG-2019 18-DEC-2019
85646F PNA Signal Analyzer	85646F	20-AUG-2019 18-DEC-2019
85646G PNA Signal Analyzer	85646G	20-AUG-2019 18-DEC-2019
85646H PNA Signal Analyzer	85646H	20-AUG-2019 18-DEC-2019
85646I PNA Signal Analyzer	85646I	20-AUG-2019 18-DEC-2019
85646J PNA Signal Analyzer	85646J	20-AUG-2019 18-DEC-2019
85646K PNA Signal Analyzer	85646K	20-AUG-2019 18-DEC-2019
85646L PNA Signal Analyzer	85646L	20-AUG-2019 18-DEC-2019
85646M PNA Signal Analyzer	85646M	20-AUG-2019 18-DEC-2019
85646N PNA Signal Analyzer	85646N	20-AUG-2019 18-DEC-2019
85646O PNA Signal Analyzer	85646O	20-AUG-2019 18-DEC-2019
85646P PNA Signal Analyzer	85646P	20-AUG-2019 18-DEC-2019
85646Q PNA Signal Analyzer	85646Q	20-AUG-2019 18-DEC-2019
85646R PNA Signal Analyzer	85646R	20-AUG-2019 18-DEC-2019
85646S PNA Signal Analyzer	85646S	20-AUG-2019 18-DEC-2019
85646T PNA Signal Analyzer	85646T	20-AUG-2019 18-DEC-2019
85646U PNA Signal Analyzer	85646U	20-AUG-2019 18-DEC-2019
85646V PNA Signal Analyzer	85646V	20-AUG-2019 18-DEC-2019
85646W PNA Signal Analyzer	85646W	20-AUG-2019 18-DEC-2019
85646X PNA Signal Analyzer	85646X	20-AUG-2019 18-DEC-2019
85646Y PNA Signal Analyzer	85646Y	20-AUG-2019 18-DEC-2019
85646Z PNA Signal Analyzer	85646Z	20-AUG-2019 18-DEC-2019
85647A PNA Signal Analyzer	85647A	20-AUG-2019 18-DEC-2019
85647B PNA Signal Analyzer	85647B	20-AUG-2019 18-DEC-2019
85647C PNA Signal Analyzer	85647C	20-AUG-2019 18-DEC-2019
85647D PNA Signal Analyzer	85647D	20-AUG-2019 18-DEC-2019
85647E PNA Signal Analyzer	85647E	20-AUG-2019 18-DEC-2019
85647F PNA Signal Analyzer	85647F	20-AUG-2019 18-DEC-2019
85647G PNA Signal Analyzer	85647G	20-AUG-2019 18-DEC-2019
85647H PNA Signal Analyzer	85647H	20-AUG-2019 18-DEC-2019
85647I PNA Signal Analyzer	85647I	20-AUG-2019 18-DEC-2019
85647J PNA Signal Analyzer	85647J	20-AUG-2019 18-DEC-2019
85647K PNA Signal Analyzer	85647K	20-AUG-2019 18-DEC-2019
85647L PNA Signal Analyzer	85647L	20-AUG-2019 18-DEC-2019
85647M PNA Signal Analyzer	85647M	20-AUG-2019 18-DEC-2019
85647N PNA Signal Analyzer	85647N	20-AUG-2019 18-DEC-2019
85647O PNA Signal Analyzer	85647O	20-AUG-2019 18-DEC-2019
85647P PNA Signal Analyzer	85647P	20-AUG-2019 18-DEC-2019
85647Q PNA Signal Analyzer	85647Q	20-AUG-2019 18-DEC-2019
85647R PNA Signal Analyzer	85647R	20-AUG-2019 18-DEC-2019
85647S PNA Signal Analyzer	85647S	20-AUG-2019 18-DEC-2019
85647T PNA Signal Analyzer	85647T	20-AUG-2019 18-DEC-2019
85647U PNA Signal Analyzer	85647U	20-AUG-2019 18-DEC-2019
85647V PNA Signal Analyzer	85647V	20-AUG-2019 18-DEC-2019
85647W PNA Signal Analyzer	85647W	20-AUG-2019 18-DEC-2019
85647X PNA Signal Analyzer		

2. 75-110 GHz Keysight M1970W



Certificate Of Calibration

Certificate No: M1970WMY5143078420190020

Manufacturer: Keysight Technologies
Model No: M1970W
Options Installed With Specifications: N/A

Description: Waveguide Harmonic Mixer
Serial No: MY51430784

Customer Asset:
Customer:
UL LLC
47173 Benicia St
FREMONT, CA 94538-7368
UNITED STATES

Location of Calibration:
Plot 44, Kayan Lepas Industrial Park IV
11900 Penang
Malaysia

Date of Calibration: 20-AUG-2019
Temperature: (23 ± 3)°C
Procedure: MTA-T0264

Received Date: 20-AUG-2019
Humidity: (20 to 70) % RH

This certifies that the equipment has been calibrated using applicable Keysight Technologies procedures in compliance with a quality management system registered to ISO 9001:2015.

As Received Conditions: Initial testing found the equipment to be IN SPECIFICATION at the points tested.

Action Taken: No corrective actions were necessary.

As Shipped Conditions: At the completion of calibration, measured values were IN SPECIFICATION at the parameters tested.

Remarks or special requirements:

Notes:

1. This calibration report may refer to equipment manufactured by HP, Agilent and Keysight as being manufactured by Keysight Technologies, Inc.
2. The test limits stated in the calibration report correspond to the published specifications of the equipment, at the points tested.
3. The documented test results relate to the equipment tested only.
4. This calibration report shall not be reproduced, except in full.

Traceability Information: Measurements are traceable to the International System of Units (SI) via national metrology institutes (www.keysight.com/find/nmi) that are signatories to the CIPM Mutual Recognition Arrangement.



cert form rev k

Page 1 of 2



Certificate Of Calibration

Certificate No: M1970WMY5143078420190020

Calibration Equipment Used:
Model Number Model Description

Date used: Date equipment used in this Calibration
Equipment ID Used Date Cal Due Date

89020A	PNA Signal Analyzer	PD7869	20-AUG-2019	24-DEC-2019
83570	Signal Source	PD7874	20-AUG-2019	18-JUN-2020
E6619B	SPM Series Power Meter	PD7600	20-AUG-2019	02-OCT-2019
83570	Signal Source	PD7614	20-AUG-2019	24-MAR-2020
83466A	Power Sensor	PD7596	20-AUG-2019	12-SEP-2019

Print Date: 21 Aug 2019

Khairul Razmi Bin Zayzan
Quality Manager
Keysight Calibration Provider #71456

cert form rev k

Page 2 of 2

Equipment used before Calibration due date.

3. 110-170 GHz VDI WR6.5SAX



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: UL LLC
47173 Benicia Street
Fremont, CA 94538
United States

From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 201155
Shipping Date: 04/07/20

Today's Date: 04/07/20
PO Number: 7862016203

Quantity				<u>Order-Job</u>
<u>Shipped</u>	<u>Unit</u>	<u>Description</u>		<u>Number</u>
1	EA	VDIWR6.5SAX WR6.5SAX / SN: SAX 624		20075D-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).


Authorized Signature
Virginia Diodes, Inc

Page 1 of 1

4. 170-260 GHz VDI WR4.3SAX



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: UL LLC
47173 Benicia Street
Fremont, CA 94538
United States

From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 201728
Shipping Date: 05/22/20

Today's Date: 05/28/20
PO Number: 7862016682

<u>Quantity</u>	<u>Shipped</u>	<u>Units</u>	<u>Description</u>	<u>Order-Job</u> <u>Number</u>
1		EA	VDIWR4.3SAX WR15SAX / SN: SAX 651	20141E-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).



Authorized Signature
Virginia Diodes, Inc

Page 1 of 1


5. 35-50 GHz CMI HO22R HORN ANTENNA



24 Boston Court
Longmont, CO 80501
303 651-0707 (P)
303 651-0706 (F)
www.custommicrowave.com

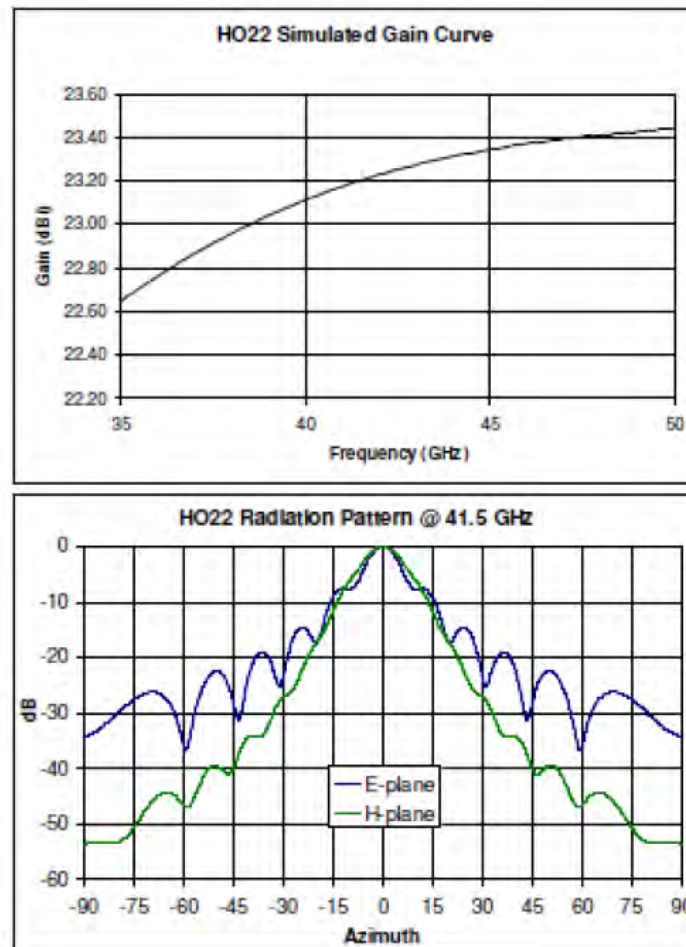


6. 50-75 GHz CMI HO15R HORN ANTENNA

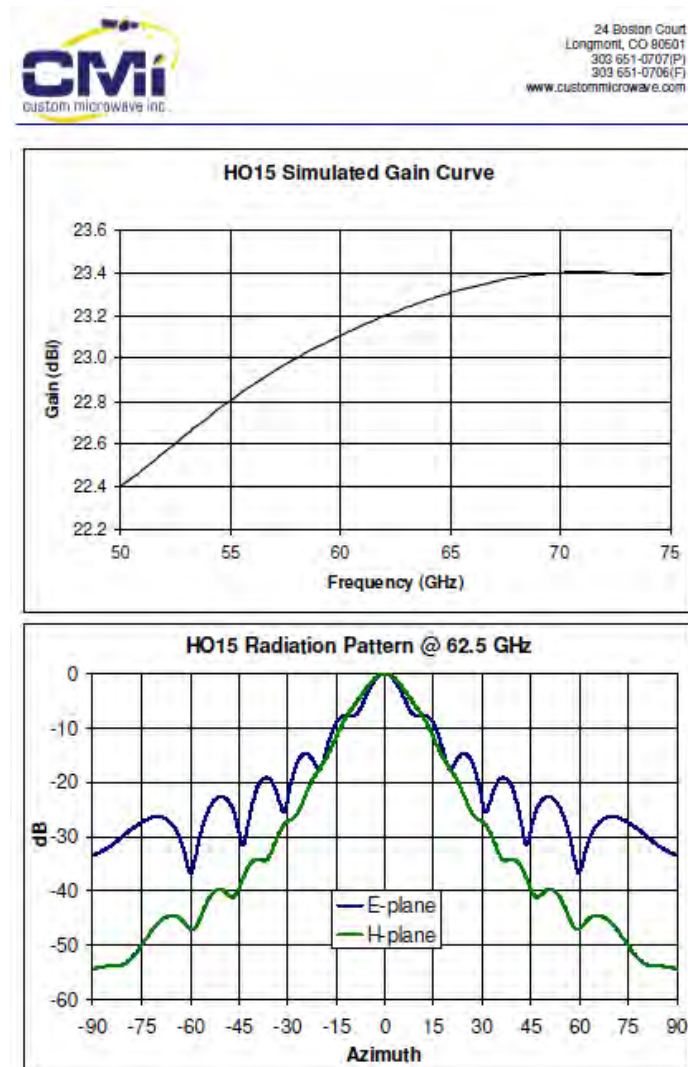


7. 75-110 GHz CMI HO10R HORN ANTENNA



24 Boston Court
Longmont, CO 80501
303 651-0707(P)
303 651-0706(F)
www.custommicrowave.com

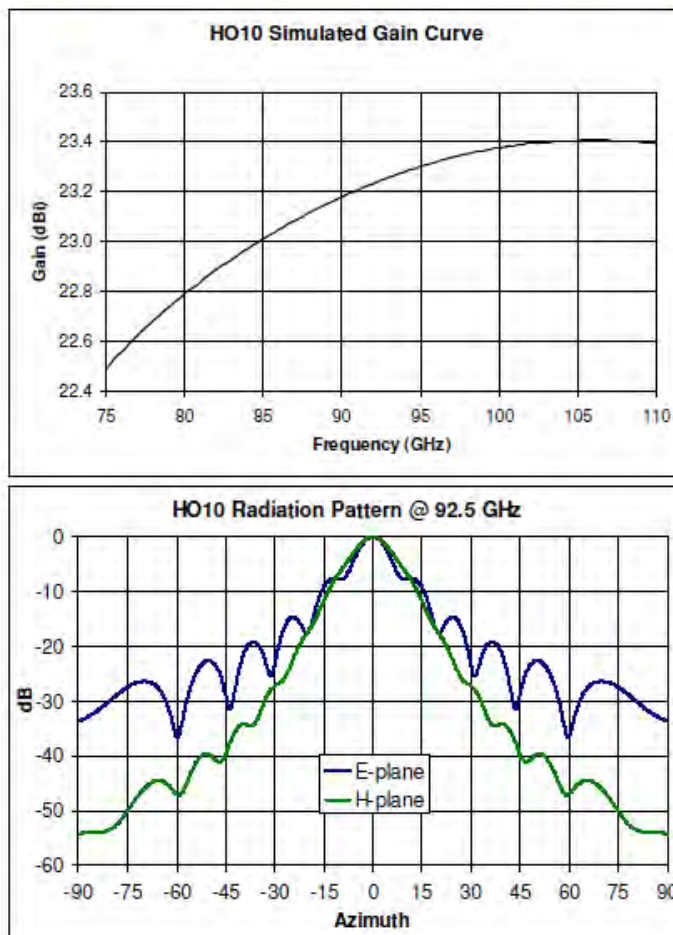

8. 110-170 GHz CMI HO6R HORN ANTENNA

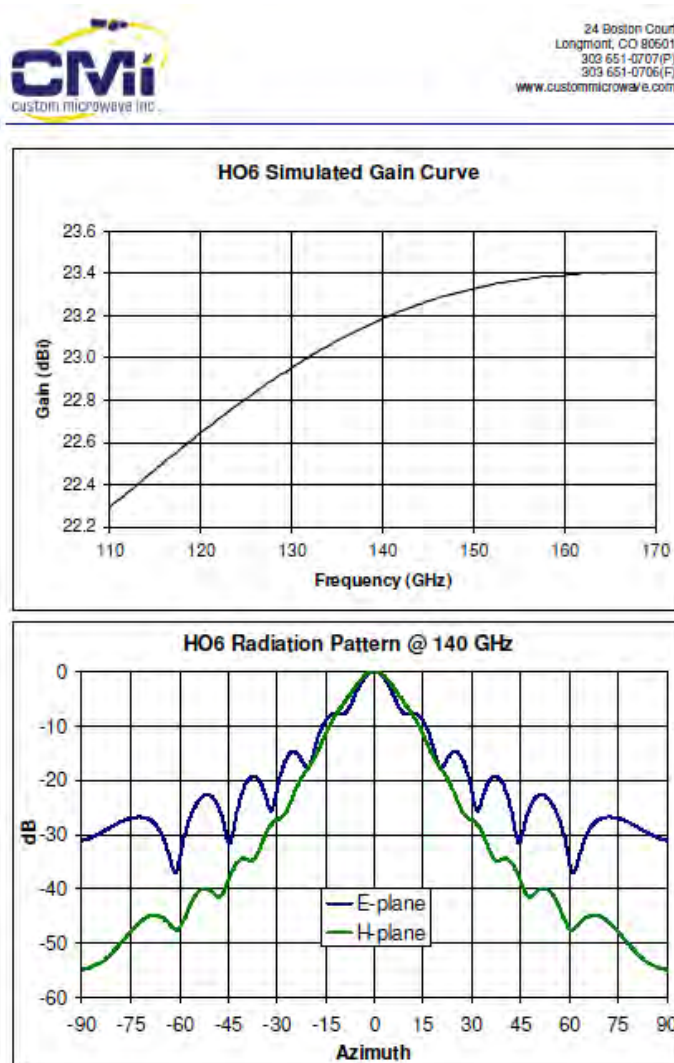

9. 170-260 GHz CMI HO4R HORN ANTENNA

