



# **TEST REPORT**

**Report Number:** 14040867-E3V2

**Applicant :** APPLE, INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A

**Model :** A2649 (Parent Model, Full Test)  
A2881, A2882, A2883, A2884 (Variant Models)

**FCC ID :** BCG-E8138A (Parent Model)  
BCG-E8142A, BCG-E8143A, BCG-E8144A (Variant Models)

**IC :** 579C-E8138A (Parent Model)  
579C-E8142A, 579C-E8143A, 579C-E8144A (Variant Models)

**EUT Description :** SMARTPHONE

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C  
ISED RSS-247 ISSUE 2  
ISED RSS-GEN ISSUE 5 + A1 + A2

**Date Of Issue:**

July 11, 2022

**Prepared by:**

UL LLC

47173 Benicia Street  
Fremont, CA 94538 U.S.A.

TEL: (510) 319-4000

FAX: (510) 661-0888



**REPORT REVISION HISTORY**

Rev.	Issue Date	Revisions	Revised By
V1	6/30/2022	Initial Issue	Francisco deAnda
V2	7/11/2022	Addressed TCB Questions on Seconds 6.5, 8, 9.2, 9.4 and 9.5	Tony X. Li

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST SUMMARY .....</b>	<b>7</b>
<b>3. TEST METHODOLOGY .....</b>	<b>7</b>
<b>4. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....</b>	<b>8</b>
5.1. METROLOGICAL TRACEABILITY .....	8
5.2. DECISION RULES .....	8
5.3. MEASUREMENT UNCERTAINTY .....	8
5.4. SAMPLE CALCULATION.....	8
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
6.1. EUT DESCRIPTION.....	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	9
6.4. SOFTWARE AND FIRMWARE .....	10
6.5. WORST-CASE CONFIGURATION AND MODE.....	10
6.6. DESCRIPTION OF TEST SETUP.....	11
<b>7. MEASUREMENT METHOD .....</b>	<b>14</b>
<b>8. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>15</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
9.1. ON TIME AND DUTY CYCLE .....	16
9.2. 99% BANDWIDTH.....	18
9.2.1. HIGH POWER HDR (HDR4).....	19
9.2.2. HIGH POWER HDR TXBF (HDR4).....	20
9.2.3. HIGH POWER HDR (HDR8).....	21
9.2.4. HIGH POWER HDR TXBF (HDR8).....	22
9.3. 6 dB BANDWIDTH .....	23
9.3.1. HIGH POWER HDR (HDR4).....	24
9.3.2. HIGH POWER HDR4 TXBF .....	25
9.4. OUTPUT POWER .....	26
9.4.1. HIGH POWER HDR (HDR4).....	27
9.4.2. HIGH POWER HDR TXBF (HDR4).....	27
9.4.3. HIGH POWER HDR (HDR8).....	28
9.4.4. HIGH POWER HDR TXBF (HDR8).....	28
9.4.5. LOW POWER HDR (HDR4).....	29
9.4.6. LOW POWER HDR TXBF (HDR4).....	29
9.4.7. LOW POWER HDR (HDR8).....	30

9.4.8.	LOW POWER HDR TXBF (HDR8).....	30
9.5.	<b>AVERAGE POWER.....</b>	<b>31</b>
9.5.1.	HIGH POWER HDR (HDR4).....	32
9.5.2.	HIGH POWER HDR TXBF (HDR4).....	32
9.5.3.	HIGH POWER HDR (HDR8).....	33
9.5.4.	HIGH POWER HDR TXBF (HDR8).....	33
9.5.5.	LOW POWER HDR (HDR4).....	34
9.5.6.	LOW POWER HDR TXBF (HDR4).....	34
9.5.7.	LOW POWER HDR (HDR8).....	35
9.5.8.	LOW POWER HDR TXBF (HDR8).....	35
9.6.	<b>POWER SPECTRAL DENSITY .....</b>	<b>36</b>
9.6.1.	HIGH POWER HDR (HDR4).....	37
9.6.2.	HIGH POWER HDR TXBF (HDR4).....	38
9.6.3.	HIGH POWER HDR (HDR8).....	39
9.6.4.	HIGH POWER HDR TXBF (HDR8).....	40
9.7.	<b>CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>41</b>
9.7.1.	HIGH POWER HDR (HDR4).....	42
9.7.2.	HIGH POWER HDR TXBF (HDR4).....	44
9.7.3.	HIGH POWER HDR (HDR8).....	46
9.7.4.	HIGH POWER HDR TXBF (HDR8).....	48
9.7.5.	LOW POWER HDR (HDR4).....	50
9.7.6.	LOW POWER HDR TXBF (HDR4).....	52
9.7.7.	LOW POWER HDR (HDR8).....	54
9.7.8.	LOW POWER HDR TXBF (HDR8).....	56
10.	<b>RADIATED TEST RESULTS .....</b>	<b>58</b>
10.1.	<b>LIMITS AND PROCEDURE.....</b>	<b>58</b>
10.2.	<b>TRANSMITTER ABOVE 1 GHz.....</b>	<b>60</b>
10.2.1.	HIGH POWER HDR (HDR4) .....	60
10.2.2.	HIGH POWER HDR TXBF (HDR4) .....	68
10.2.3.	HIGH POWER HDR (HDR8) .....	72
10.2.4.	HIGH POWER HDR TXBF (HDR8) .....	80
10.2.5.	HARMONICS AND SPURIOUS EMISSIONS.....	84
10.2.6.	LOW POWER HDR (HDR4) .....	90
10.2.7.	LOW POWER HDR TXBF (HDR4).....	98
10.2.8.	LOW POWER HDR (HDR8).....	102
10.2.9.	LOW POWER HDR TXBF (HDR8).....	110
10.3.	<b>WORST CASE BELOW 1 GHz.....</b>	<b>114</b>
10.4.	<b>WORST CASE 18-26 GHz .....</b>	<b>116</b>
11.	<b>AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>118</b>
11.1.	<b>AC Power Line With AC/DC Adapter .....</b>	<b>119</b>
11.2.	<b>AC Power Line With Laptop.....</b>	<b>121</b>
12.	<b>SETUP PHOTOS.....</b>	<b>123</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A

**EUT DESCRIPTION:** SMARTPHONE

**MODEL:** A2649 (Parent Model)  
A2881, A2882, A2883, A2884 (Variant Models)

**BRAND:** APPLE

**FCC ID:** BCG-E8138A (Parent Model)  
BCG-E8142A, BCG-E8143A, BCG-E8144A (Variant Models)

**IC:** 579C-E8138A (Parent Model)  
579C-E8142A, 579C-E8143A, 579C-E8144A (Variant Models)

**SERIAL NUMBER:** V2V9KHF5W9

**SAMPLE RECEIPT DATE:** MARCH 13, 2022

**DATE TESTED:** MARCH 14 –JULY 5, 2022


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For  
UL LLC. By:



---

Francisco de Anda  
Staff Engineer  
Consumer Technology Division  
UL LLC

Prepared By:



---

Tony Li  
Test Engineer  
Consumer Technology Division  
UL LLC

## 2. TEST SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	complies	None.

## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with;

- FCC CFR 47 Part 2,
- FCC CFR 47 Part 15,
- ANSI C63.10-2013,
- KDB 558074 D01 15.247 Meas Guidance v05r02,
- KDB 414788 D01 Radiated Test Site v01r01,
- KDB662911, RSS-GEN Issue 5 +A1 +A2,
- RSS-247 Issue 2.

## 4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

Location	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
<input checked="" type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA	US0104	22541	550739
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA	US0104	2324B	550739

## 5. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

### 5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U <sub>Lab</sub>
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.4. SAMPLE CALCULATION

#### RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)  
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

#### MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.  
36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV



## 6. EQUIPMENT UNDER TEST

### 6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and MSS. All models except reference model support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

Testing was performed on the parent model and is used to support the application for the parent and variants identified in this report based on the test plan submitted and approved via KDB inquiry by the FCC and by ISED-Canada.

The Model and FCC IDs / ISED covered by this report includes:

Parent Model: A2649, FCC ID: BCG-E8138A, IC: 579C-E8138A

Variant Models: A2881, FCC ID: BCG-E8142A, IC: 579C-E8142A  
 A2882; FCC ID: BCG-E8143A, IC: 579C-E8143A  
 A2883 & A2884, FCC ID: BCG-E8144A, IC: 579C-E8144A

### 6.2. MAXIMUM OUTPUT POWER

s

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2404 - 2476	HDR4	15.54	35.81
	Low Power			9.41	8.73
	High Power		HDR8	16.80	47.86
	Low Power			10.92	12.36
ANT 3	High Power	2404 - 2476	HDR4	15.65	36.73
	Low Power			9.27	8.45
	High Power		HDR8	16.85	48.42
	Low Power			10.85	12.16
BF, ANT 4 + ANT 3	High Power	2404 - 2476	HDR4	18.64	73.11
	Low Power			12.17	16.48
	High Power		HDR8	19.77	94.84
	Low Power			13.92	24.66

### 6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	-2.0	-0.8

## **6.4. SOFTWARE AND FIRMWARE**

The EUT firmware version installed for testing was 20.1.467.5699.

## **6.5. WORST-CASE CONFIGURATION AND MODE**

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4, ANT 3 and 2TX beamforming. It was determined that Y (Landscape) orientation was the worst-case orientation for ANT 3, beamforming 2TX and X (Flatbed) for ANT 4.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

High power HDR4 and HDR8 TXBF harmonic spurious 1-18GHz were investigated to determine the worst case and results showed HDR4 was the worst case. Therefore, High Power Beamforming HDR4 mode was set to maximum power based on SISO to cover both SISO and MIMO modes to complies with radiated spurious emissions limits in the restricted bands between 1GHz and 18GHz low/mid/high channel (except the band edge).

99%, 6dB and PSD on high power mode are tested to cover Low power mode since 99%, 6dB results are no different on low power mode and for PSD high power mode is the worst case.

There are three vendors of the Wi-Fi/Bluetooth radio modules: variant 1, 2 and 3. The WiFi/BT radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.



Baseline testing was performed on the three variants to determine the worst case on all conducted power and radiated emissions.



**6.6. DESCRIPTION OF TEST SETUP**

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	Macbook Pro	C02VD7SAHV22		BCGA1708
Laptop AC/DC adapter		Liteon Technology	A1424	NSW25679		DoC
EUT AC/DC adapter		Apple	A1720	C3D8417A7R93KVPA8		DoC
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1.0	N/A
3	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Shielded	1	N/A

**TEST SETUP**

The EUT setup is shown as below. Test software exercised the radio card.

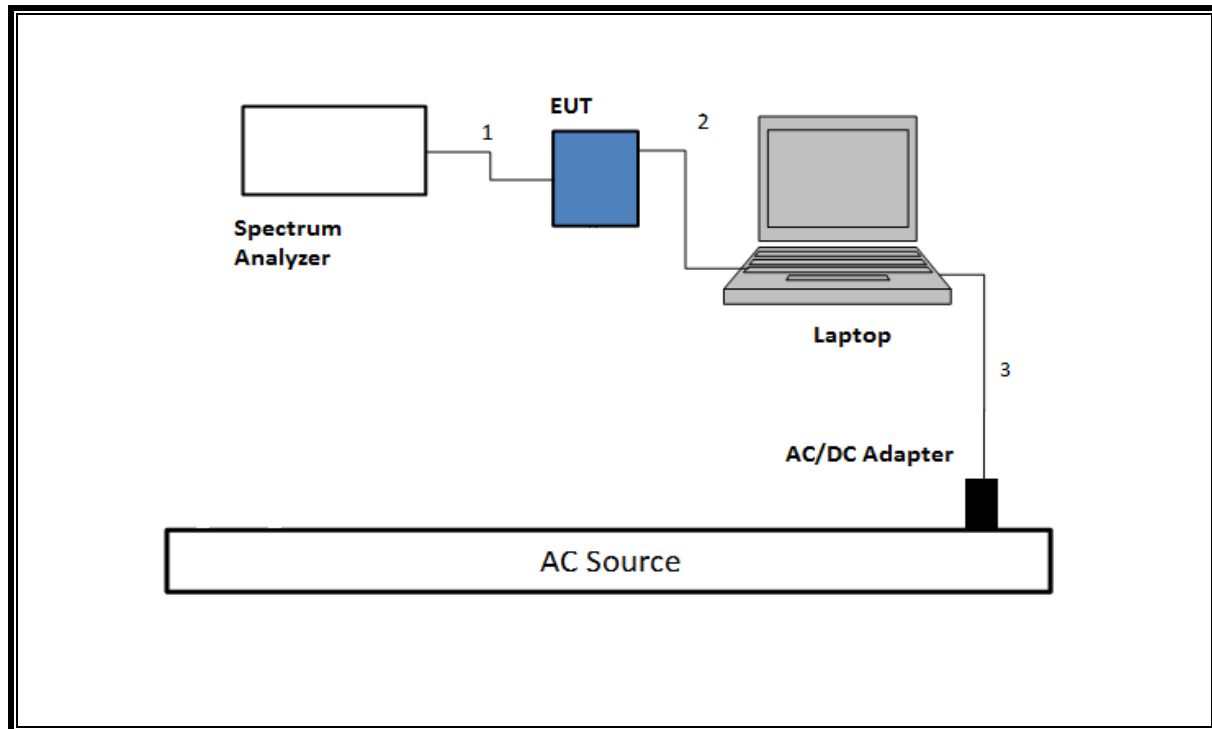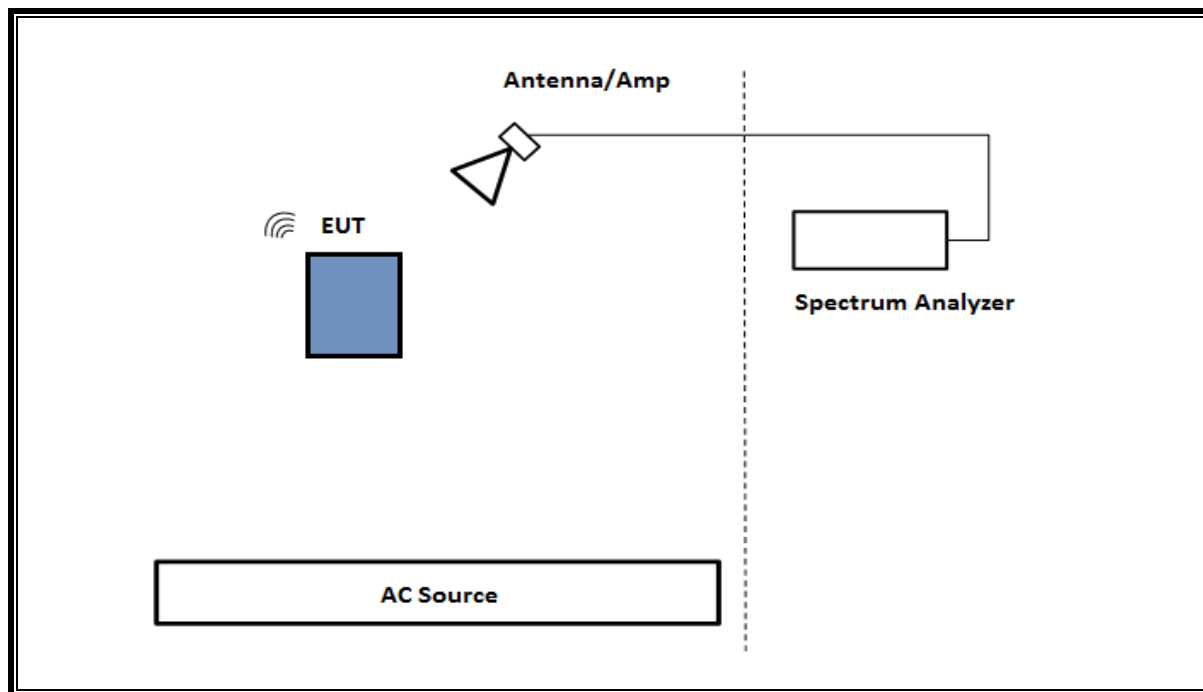**SETUP DIAGRAM FOR CONDUCTED TESTS****SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz**

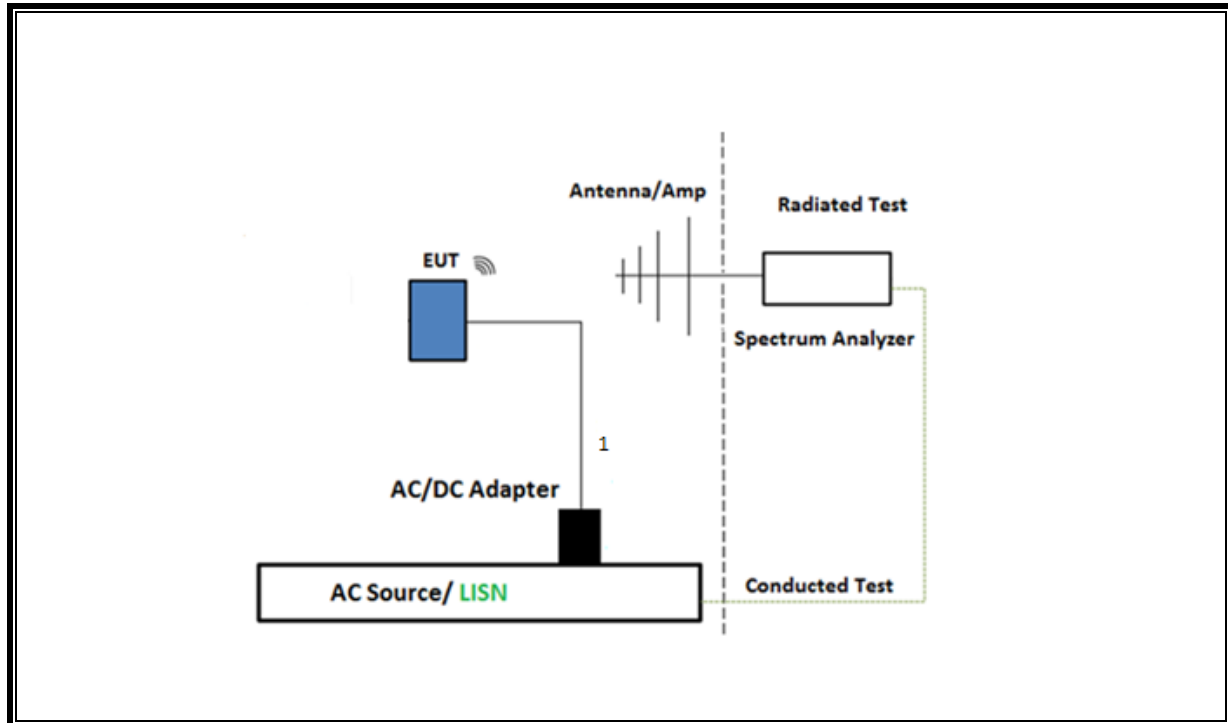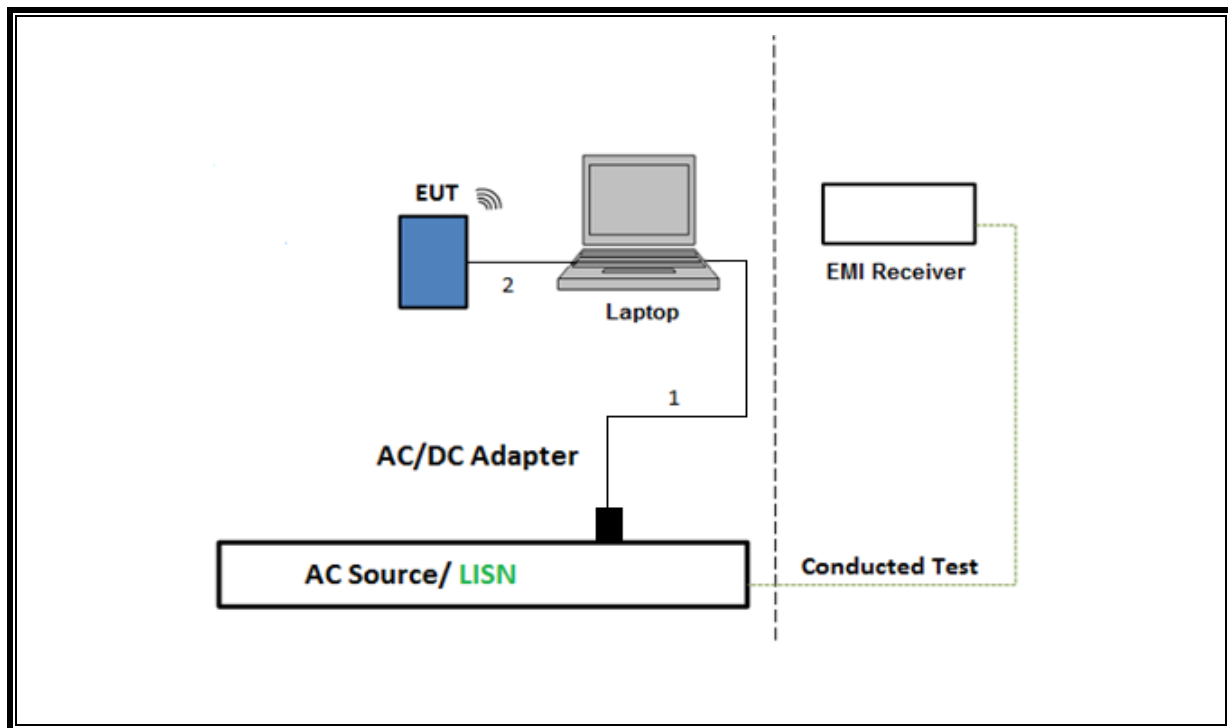**SETUP DIAGRAM FOR Below 1GHz****TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

## 7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v05r02, Section 6.

6 dB BW: ANSI C63.10 Subclause -11.8.1 RBW  $\geq$  DTS BW

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Measurement using gated average power meter.

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 & Clause 13

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2

Band-edge: ANSI C63.10 Subclause -11.13.3.2 & Clause 13: Integration method -Peak detection

Band-edge: ANSI C63.10 Subclause -11.13.3.3 & Clause 13: Integration method -Trace averaging with continuous transmission at full power

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated emissions non-restricted frequency bands ANSI C63.10 Subclause – 11.11 & Clause 13

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

**NOTE:** All conducted antenna port tests for Beamforming applied the same test procedures as HDR normal modes.

## 8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
RF Filter Box 1-18GHz	UL-FR1	NA	PRE0183530	11/17/2022	11/17/2021
Antenna, Horn 1-18GHz	ETS Lindgren	3117	200786	02/24/2023	02/24/2022
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200895	10/13/2022	10/13/2021
RF Filter 1-18GHz	UL-FR1	SAC 6 port rf box	203957	02/12/2023	02/12/2022
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	125179	02/01/2023	02/01/2022
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	204044	01/31/2023	01/31/2022
Amplifier 10KHz to 1GHz 32dB	Sonoma	310N	79145	07/21/2022	07/21/2021
Antenna, Horn 1-18GHz	ETS Lindgren	3117	80430	07/21/2022	07/21/2021
RF Filter Box 1-18GHz	UL-FR	NA	169334	04/15/2023	04/15/2022
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	125179	02/01/2023	02/01/2022
*Power Sensor	Keysight	N1921A	T1228	06/17/2022	06/17/2021
Power Meter, P-series single channel	Keysight	N1911A	T1272	01/24/2023	01/24/2022
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	01/28/2023	01/28/2022
*Antenna Horn, 18 to 26GHz	ARA	SWH-28	81139	05/25/2022	05/25/2021
*Pre-Amp 18-26GHz	Agilent Technology	8449B	80671	04/19/2022	04/19/2021
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	90238	01/30/2023	01/30/2022

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	T1436	02/21/2023	02/21/2022
Power Cable, Line Conducted Emissions	UL	PR1	T861	10/27/2022	10/27/2021
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01-480V	175765	01/26/2023	01/26/2022
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, Mar 6, 2020		
Conducted Software	UL	UL EMC	2020.2.26 AP2021.8.27		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, July 07, 2020		

\*Testing is completed before equipment expiration date.

## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
<b>2.4GHz Band</b>						
HDR4	0.4	0.4	1.000	100.00%	0.00	0.010
HDR8	0.4	0.4	1.000	100.00%	0.00	0.010
HDR4, TXBF	0.4	0.4	1.000	100.00%	0.00	0.010
HDR8, TXBF	0.4	0.4	1.000	100.00%	0.00	0.010



## DUTY CYCLE PLOTS



## **9.2. 99% BANDWIDTH**

### **LIMITS**

None; for reporting purposes only.


### **RESULTS**

Only High Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

### 9.2.1. HIGH POWER HDR (HDR4)


#### ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.312
Middle	2440	2.313
High	2476	2.313

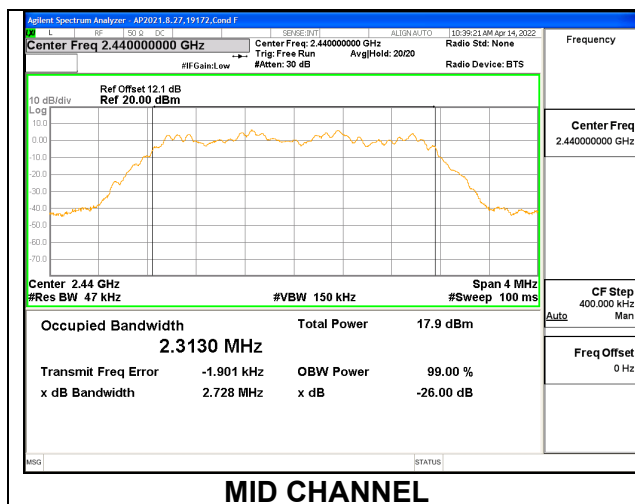



#### ANT 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	2.311
Middle	2440	2.311
High	2476	2.311

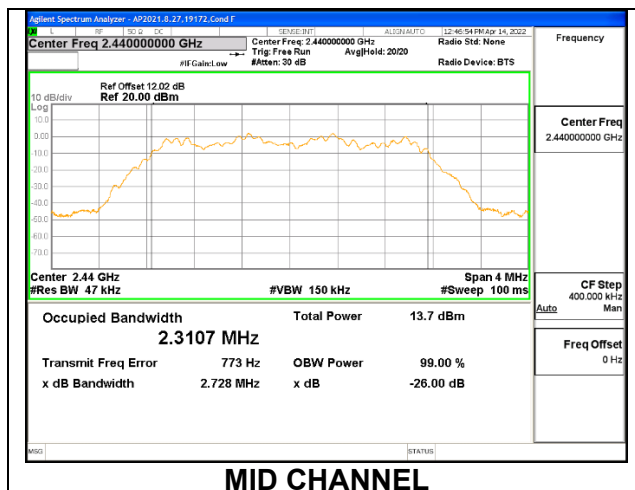


## 9.2.2. HIGH POWER HDR TXBF (HDR4)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	2.312	2.311
Middle	2440	2.321	2.311
High	2476	2.312	2.312

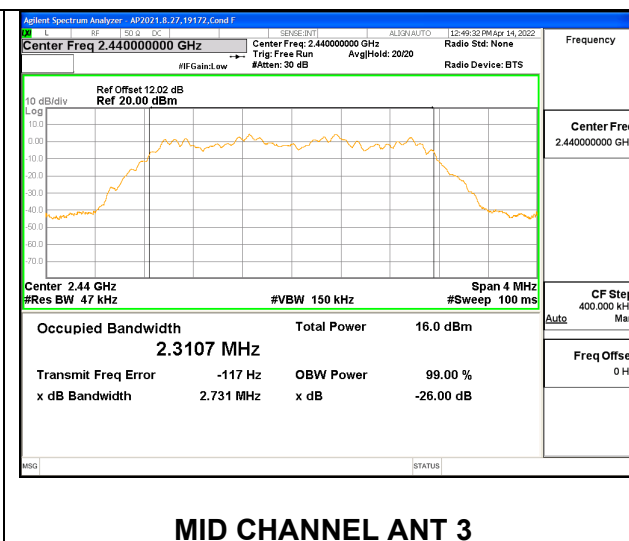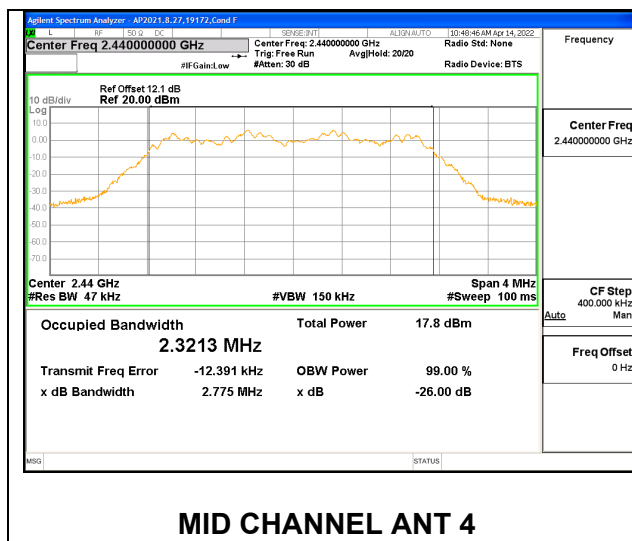


**9.2.3. HIGH POWER HDR (HDR8)****ANT 4**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.651
Middle	2440	4.739
High	2476	4.743

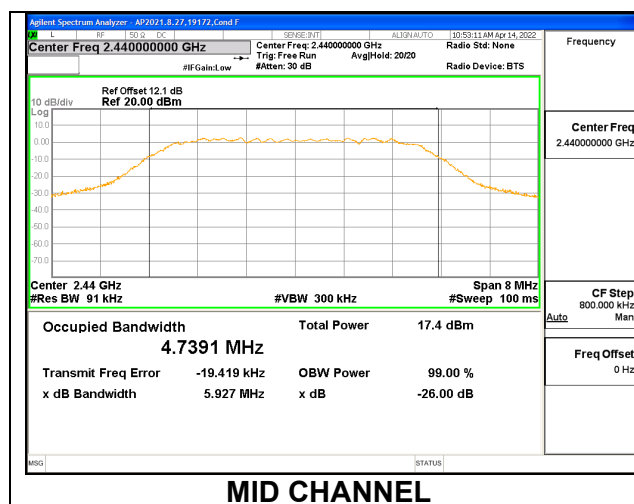
**ANT 3**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	4.630
Middle	2440	4.640
High	2476	4.648

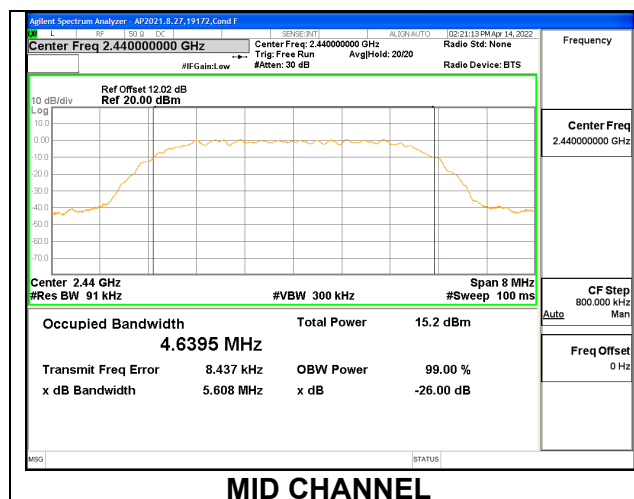

## 9.2.4. HIGH POWER HDR TXBF (HDR8)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	4.724	4.623
Middle	2440	4.645	4.640
High	2476	4.640	4.646

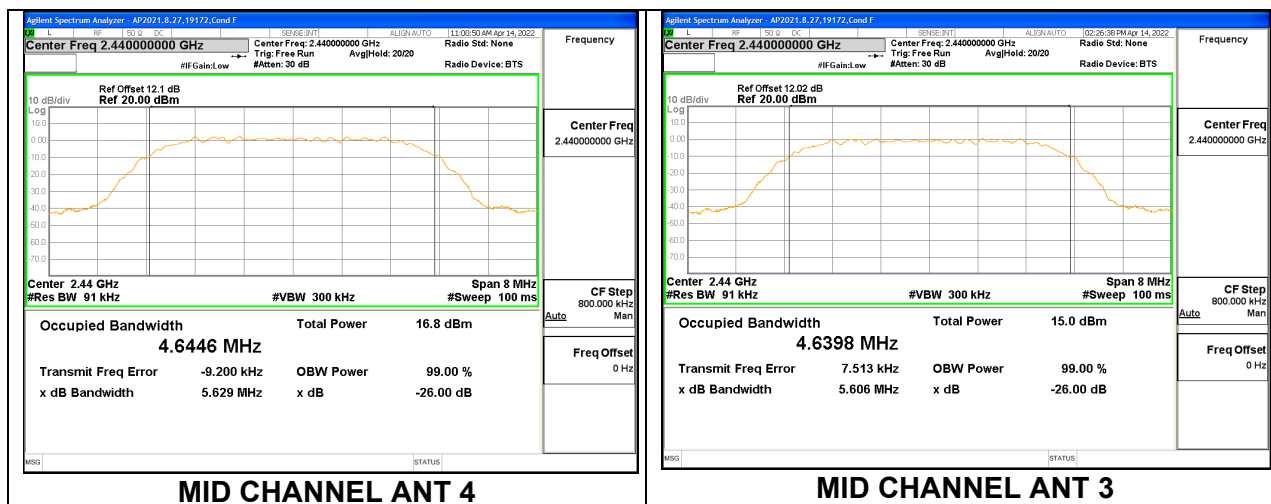

### **9.3. 6 dB BANDWIDTH**

#### **LIMITS**

FCC §15.407 (e)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### **RESULTS**


The 6dB bandwidth was measured for the narrowest bandwidth mode, HDR4, to demonstrate compliance with the minimum required bandwidth of 500 kHz. Other modes were not tested as their bandwidth is greater than the HDR4 mode, as demonstrated by the 99% bandwidth measurements performed on all modes.

Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.


Only High Power modes result is reported, it covers all Low Power modes.

**9.3.1. HIGH POWER HDR (HDR4)****ANT 4**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.108	0.5
Middle	2440	2.116	0.5
High	2476	2.104	0.5

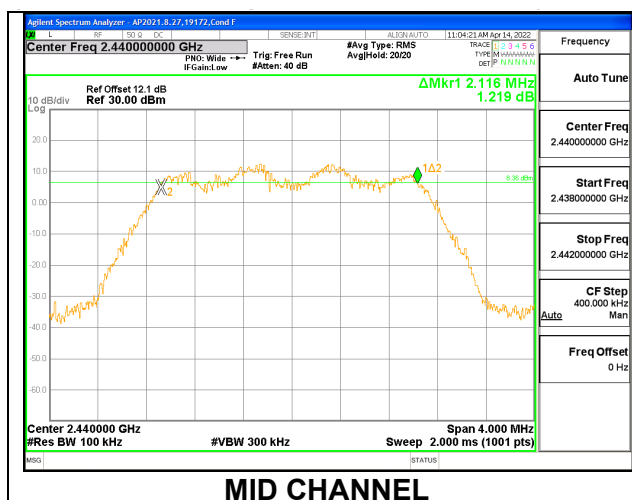
**ANT 3**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2404	2.092	0.5
Middle	2440	2.112	0.5
High	2476	2.092	0.5

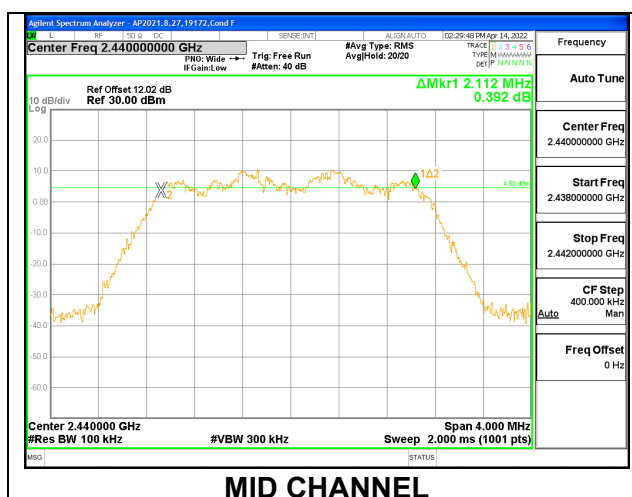



Channel	Frequency (MHz)	6 dB Bandwidth ANT 4 (MHz)	6 dB Bandwidth ANT 3 (MHz)	Minimum Limit (MHz)
Low	2404	2.104	2.088	0.5
Mid	2440	2.140	2.104	0.5
High	2476	2.092	2.096	0.5

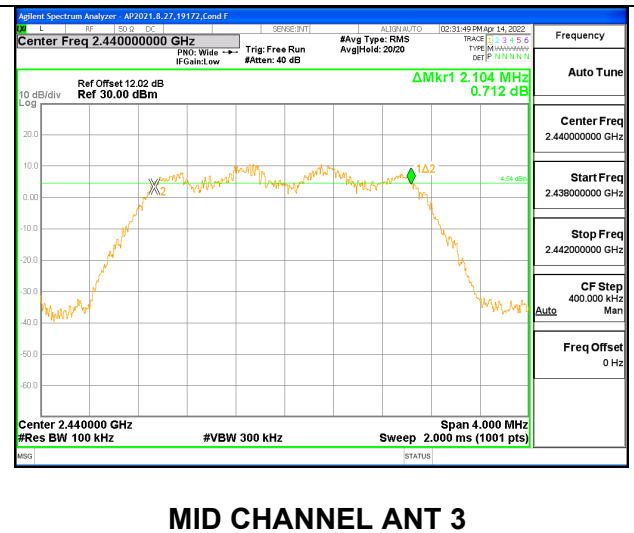

## 9.4. OUTPUT POWER

### LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

### TEST PROCEDURE

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from power meter.

### DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power and PSD due to the device supporting Beamforming mode. The directional gains are as follows:

	ANT 4	ANT 3	Correlated Chains
Band	Gain	Gain	Directional
(GHz)	(dBi)	(dBi)	Gain
			(dBi)
2.4	-2.00	-0.80	1.63

### DIRECTIONAL GAIN CALCULATION:

ANSI C63.10-2013 section 14.4.3

Uncorrelated directional gain= $10 \cdot \log((10^{(\text{Ant1}/10)} + 10^{(\text{Ant2}/10)})/2)$

Correlated directional Gain= $10 \cdot \log(((10^{(\text{Ant1}/20)} + 10^{(\text{Ant2}/20)})^2/2)$

Sample Calculation:

Ant1=-2.0, Ant2=-0.8

Uncorrelated Antenna gain= $10 \log[(10^{(-2.0/10)} + 10^{(-0.8/10)})/2] = -1.36$

Correlated Antenna gain= $10 \log[(10^{(-2.0/20)} + 10^{(-0.8/20)})^2/2] = 1.63$

### RESULTS

**9.4.1. HIGH POWER HDR (HDR4)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.31	30	-14.69
Middle	2440	15.26	30	-14.74
High	2476	15.54	30	-14.46

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.46	30	-14.54
Middle	2440	15.65	30	-14.35
High	2476	15.59	30	-14.41

**9.4.2. HIGH POWER HDR TXBF (HDR4)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	15.59	15.67	18.64	30.00	-11.36
Middle	2440	15.66	15.47	18.58	30.00	-11.42
High	2476	15.48	15.60	18.55	30.00	-11.45

**9.4.3. HIGH POWER HDR (HDR8)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	16.77	30	-13.23
Middle	2440	16.80	30	-13.20
High	2476	16.74	30	-13.26

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	16.74	30	-13.26
Middle	2440	16.85	30	-13.15
High	2476	16.68	30	-13.32

**9.4.4. HIGH POWER HDR TXBF (HDR8)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	16.80	16.70	19.76	30.00	-10.24
Middle	2440	16.64	16.63	19.65	30.00	-10.35
High	2476	16.79	16.73	19.77	30.00	-10.23

**9.4.5. LOW POWER HDR (HDR4)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.30	30	-20.70
Middle	2440	9.39	30	-20.61
High	2476	9.41	30	-20.59

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.27	30	-20.73
Middle	2440	8.97	30	-21.03
High	2476	9.11	30	-20.89

**9.4.6. LOW POWER HDR TXBF (HDR4)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	9.11	9.20	12.17	30.00	-17.83
Middle	2440	9.17	9.14	12.17	30.00	-17.83
High	2476	9.04	9.03	12.05	30.00	-17.95

**9.4.7. LOW POWER HDR (HDR8)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	10.83	30	-19.17
Middle	2440	10.86	30	-19.14
High	2476	10.92	30	-19.08

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	10.85	30	-19.15
Middle	2440	10.73	30	-19.27
High	2476	10.79	30	-19.21

**9.4.8. LOW POWER HDR TXBF (HDR8)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Peak Power Reading ANT 4 (dBm)	Peak Power Reading ANT 3 (dBm)	Total Corr'd Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	10.90	10.92	13.92	30.00	-16.08
Middle	2440	10.91	10.82	13.88	30.00	-16.12
High	2476	10.90	10.73	13.83	30.00	-16.17

## **9.5. AVERAGE POWER**

### **LIMITS**

None; for reporting purposes only.

### **TEST PROCEDURE**

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

### **RESULTS**

**9.5.1. HIGH POWER HDR (HDR4)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average power (dBm)</b>
Low	2404	12.15
Middle	2440	12.15
High	2476	12.40

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average power (dBm)</b>
Low	2404	12.35
Middle	2440	12.48
High	2476	12.45

**9.5.2. HIGH POWER HDR TXBF (HDR4)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power ANT 4 (dBm)</b>	<b>Average Power ANT 3 (dBm)</b>	<b>Total Power (dBm)</b>
Low	2404	12.49	12.47	15.49
Middle	2440	12.48	12.35	15.43
High	2476	12.30	12.46	15.39



**9.5.3. HIGH POWER HDR (HDR8)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Average power (dBm)
Low	2404	13.41
Middle	2440	13.38
High	2476	13.47

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Average power (dBm)
Low	2404	13.42
Middle	2440	13.45
High	2476	13.31

**9.5.4. HIGH POWER HDR TXBF (HDR8)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	13.46	13.30	16.39
Middle	2440	13.20	13.17	16.20
High	2476	13.38	13.40	16.40

**9.5.5. LOW POWER HDR (HDR4)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average power (dBm)</b>
Low	2404	6.45
Middle	2440	6.42
High	2476	6.43

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average power (dBm)</b>
Low	2404	6.49
Middle	2440	6.35
High	2476	6.41

**9.5.6. LOW POWER HDR TXBF (HDR4)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power ANT 4 (dBm)</b>	<b>Average Power ANT 3 (dBm)</b>	<b>Total Power (dBm)</b>
Low	2404	6.43	6.49	9.47
Middle	2440	6.45	6.43	9.45
High	2476	6.30	6.32	9.32

**9.5.7. LOW POWER HDR (HDR8)****ANT 4**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average power (dBm)</b>
Low	2404	7.42
Middle	2440	7.46
High	2476	7.44

**ANT 3**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average power (dBm)</b>
Low	2404	7.37
Middle	2440	7.34
High	2476	7.39

**9.5.8. LOW POWER HDR TXBF (HDR8)**

<b>Tested By:</b>	19172
<b>Date:</b>	4/19/2022

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power ANT 4 (dBm)</b>	<b>Average Power ANT 3 (dBm)</b>	<b>Total Power (dBm)</b>
Low	2404	7.47	7.45	10.47
Middle	2440	7.45	7.46	10.47
High	2476	7.44	7.34	10.40

## **9.6. POWER SPECTRAL DENSITY**

### **LIMITS**

FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### **RESULTS**

Only High-Power modes result is reported, it covers all Low Power modes

### 9.6.1. HIGH POWER HDR (HDR4)


#### ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.258	8	-12.26
Middle	2440	-4.176	8	-12.18
High	2476	-3.994	8	-11.99

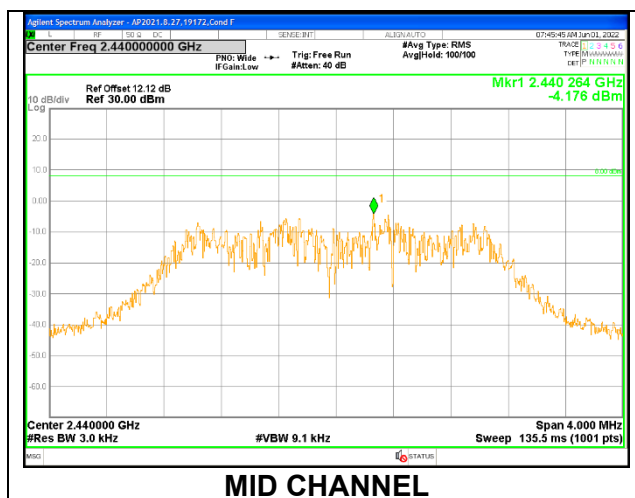

#### ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-4.102	8	-12.10
Middle	2440	-3.767	8	-11.77
High	2476	-3.976	8	-11.98


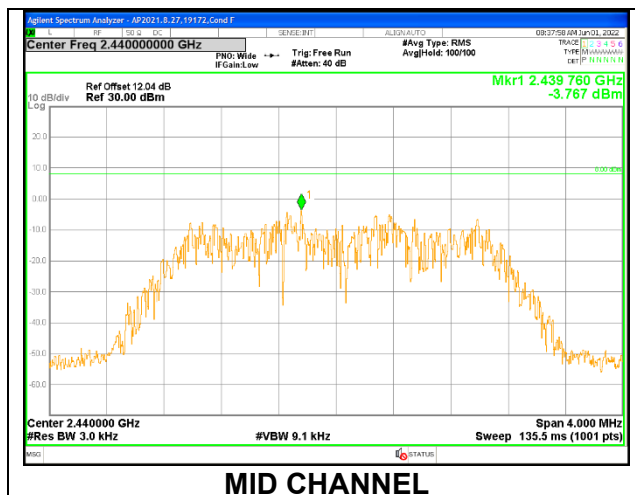


### 9.6.2. HIGH POWER HDR TXBF (HDR4)

Note: Test procedures and setting are same as HDR normal mode.

#### PSD Results


Channel	Frequency	ANT 4 Meas	ANT 3 Meas	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
	(MHz)	(dBm/ 3kHz)	(dBm/ 3kHz)			
Low	2404	-4.077	-3.872	-0.96	8.0	-9.0
Mid	2440	-4.002	-3.932	-0.96	8.0	-9.0
High	2476	-3.688	-4.212	-0.93	8.0	-8.9

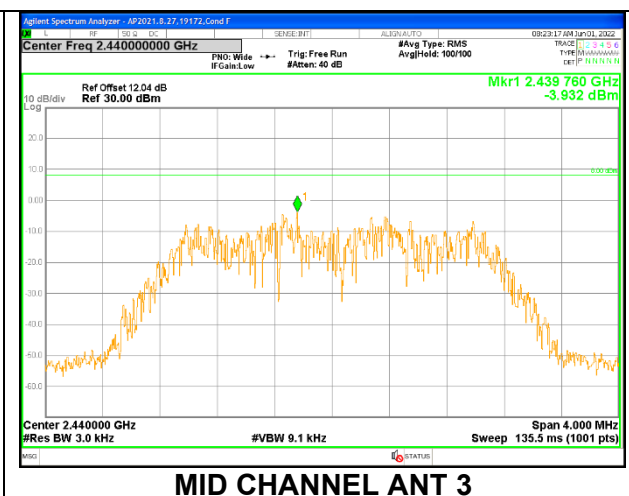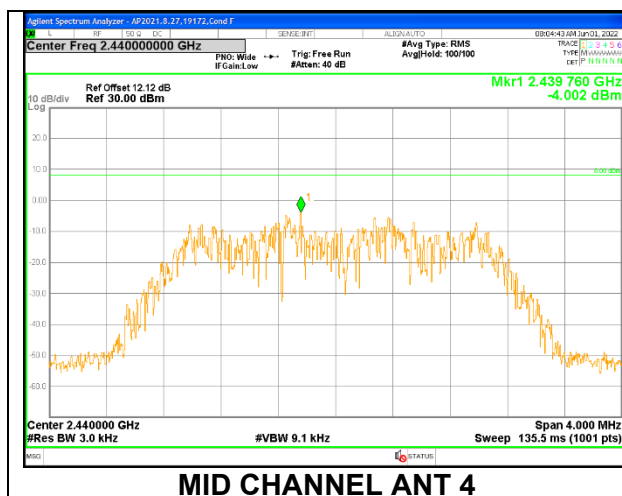

### 9.6.3. HIGH POWER HDR (HDR8)


#### ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-5.531	8	-13.53
Middle	2440	-5.367	8	-13.37
High	2476	-5.373	8	-13.37

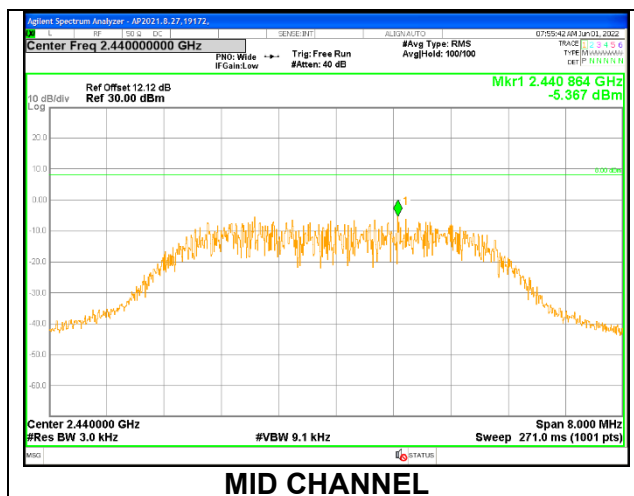

#### ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-5.683	8	-13.68
Middle	2440	-5.726	8	-13.73
High	2476	-5.485	8	-13.49


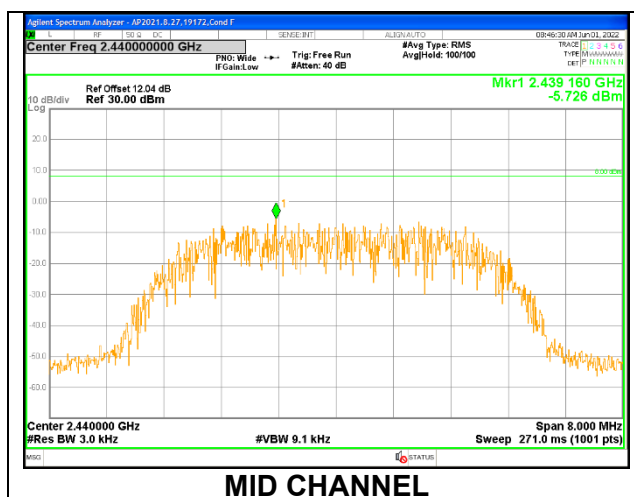


### 9.6.4. HIGH POWER HDR TXBF (HDR8)

Note: Test procedures and setting are same as HDR normal mode.

#### PSD Results

Channel	Frequency	ANT 4 Meas	ANT 3 Meas	Total Corr'd PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Margin (dB)
	(MHz)	(dBm/ 3kHz)	(dBm/ 3kHz)			
Low	2404	-5.494	-5.913	-2.69	8.0	-10.7
Mid	2440	-5.787	-5.893	-2.83	8.0	-10.8
High	2476	-5.313	-5.668	-2.48	8.0	-10.5

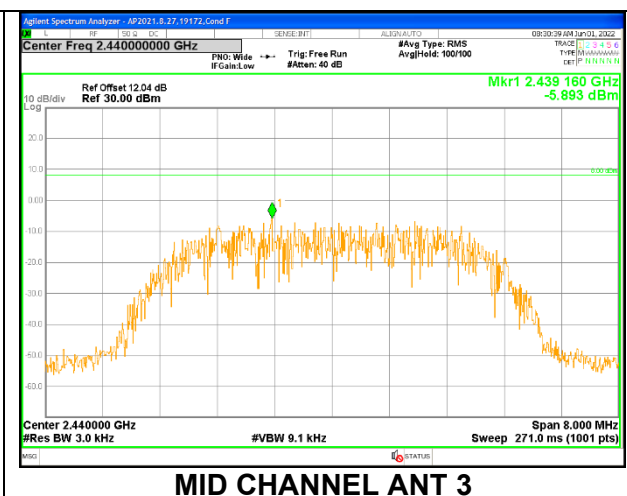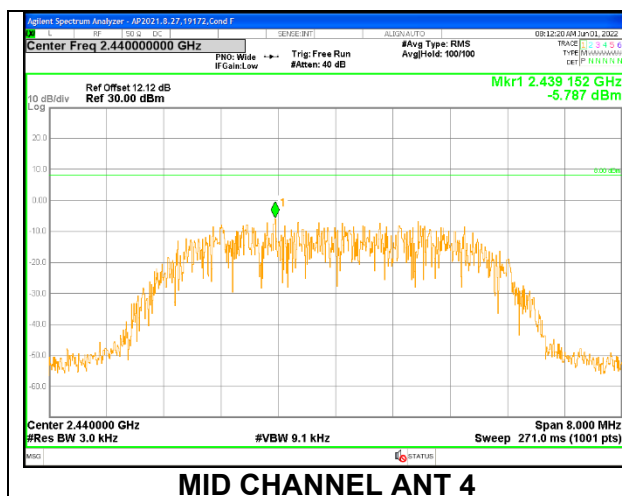



## **9.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


### **RESULTS**

## 9.7.1. HIGH POWER HDR (HDR4)


## ANT 4

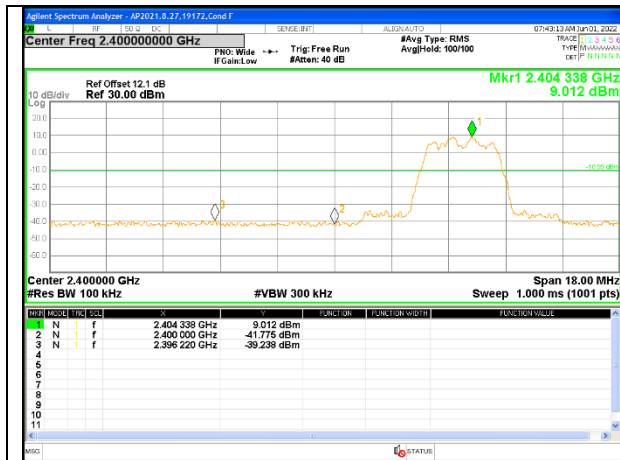


LOW CHANNEL BANDEDGE

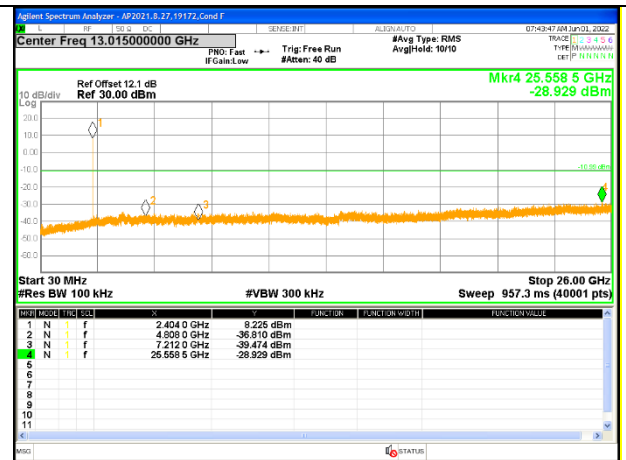


OUT-OF-BAND LOW CHANNEL

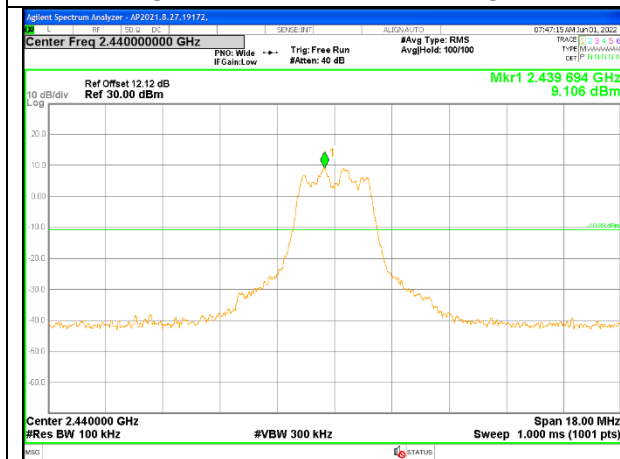


IN-BAND REFERENCE LEVEL

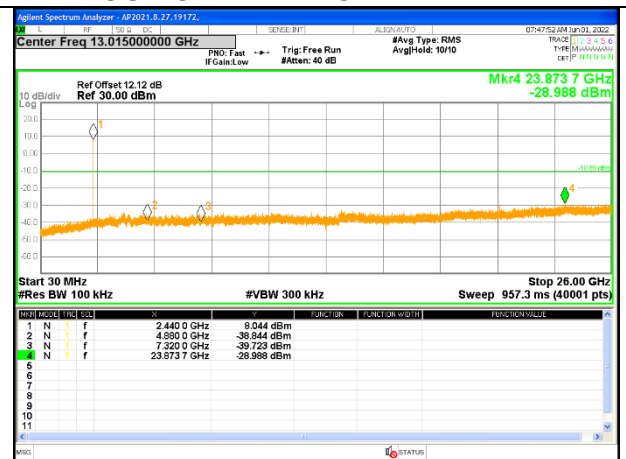







OUT-OF-BAND MID CHANNEL

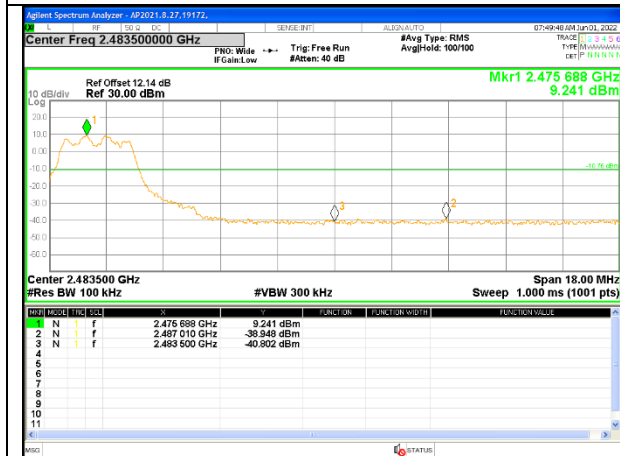

HIGH CHANNEL BANDEDGE

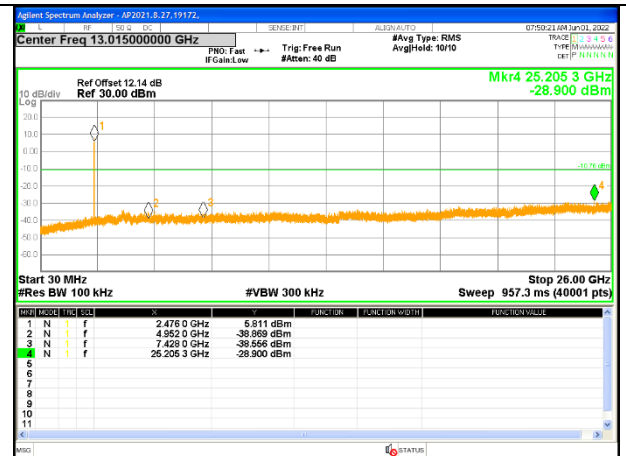


OUT-OF-BAND HIGH CHANNEL

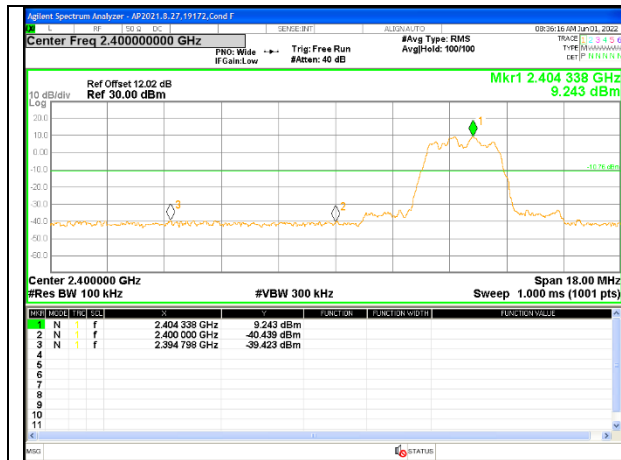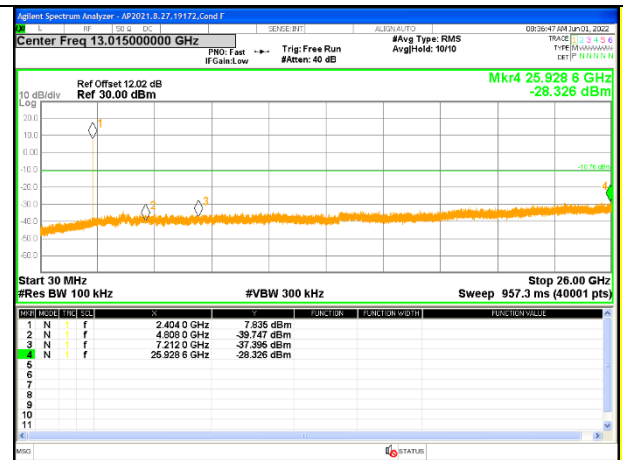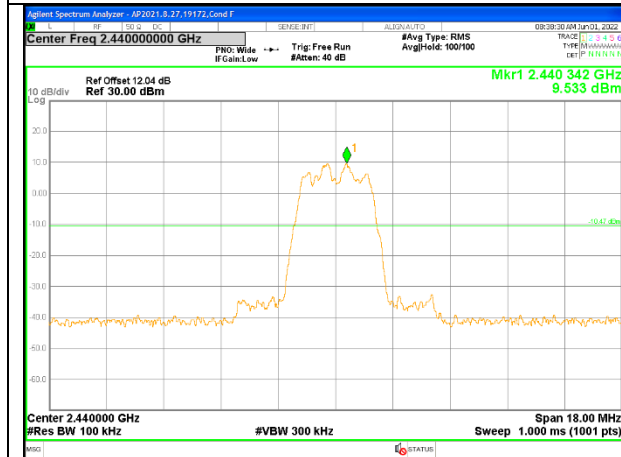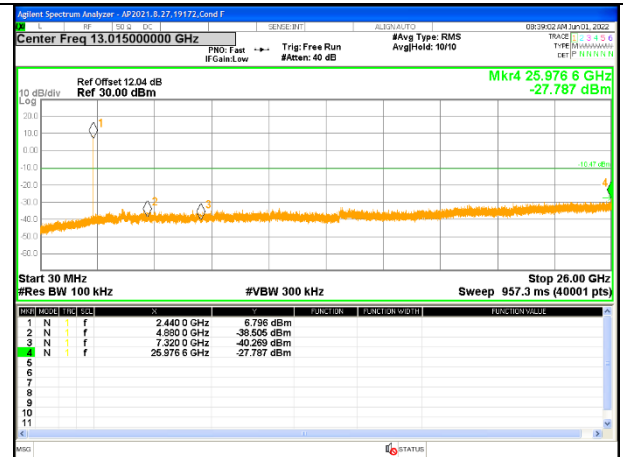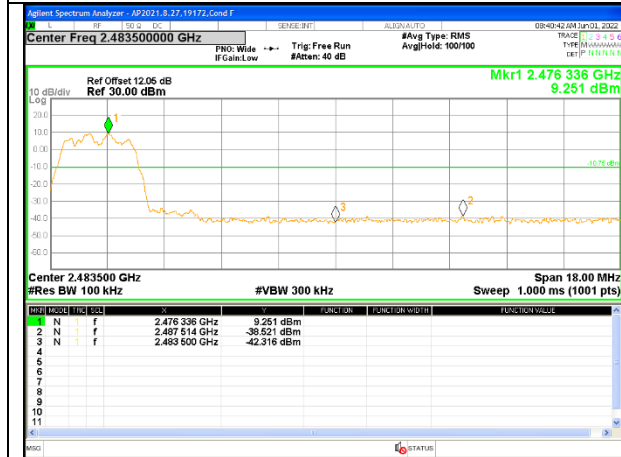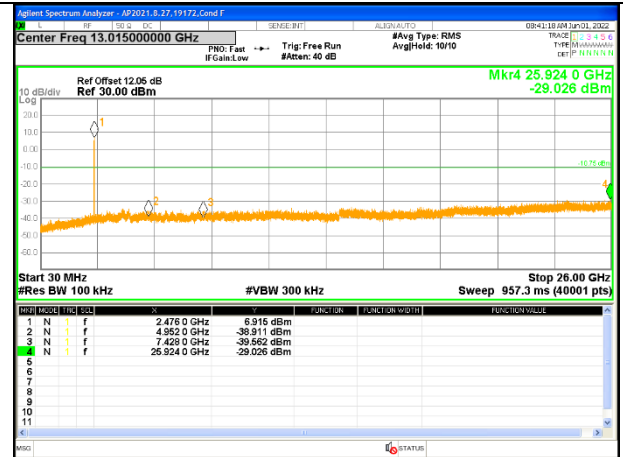
**ANT 3****LOW CHANNEL BANDEDGE****OUT-OF-BAND LOW CHANNEL****IN-BAND REFERENCE LEVEL****OUT-OF-BAND MID CHANNEL****HIGH CHANNEL BANDEDGE****OUT-OF-BAND HIGH CHANNEL**

## 9.7.2. HIGH POWER HDR TXBF (HDR4)


## ANT 4

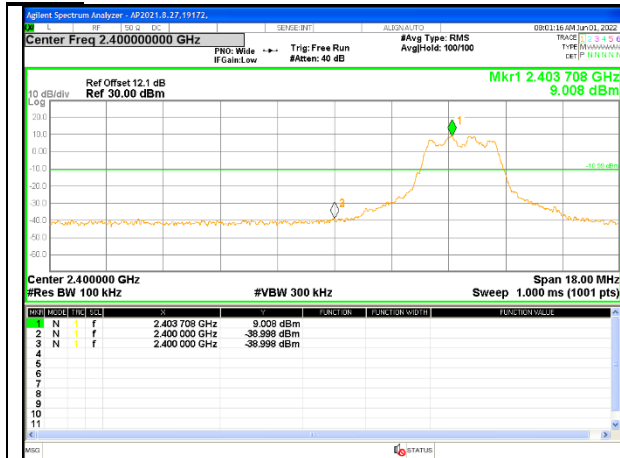


LOW CHANNEL BANDEDGE ANT 4

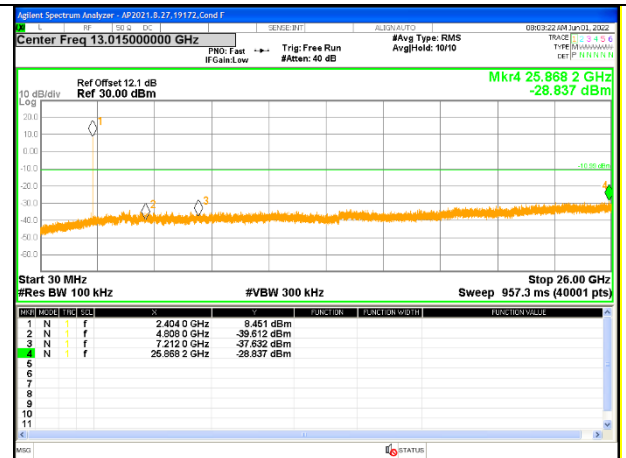


OUT-OF-BAND LOW CHANNEL ANT 4

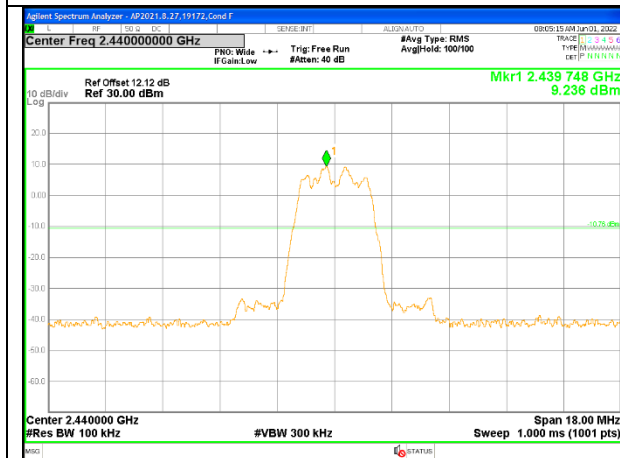


IN-BAND REFERENCE LEVEL ANT 4

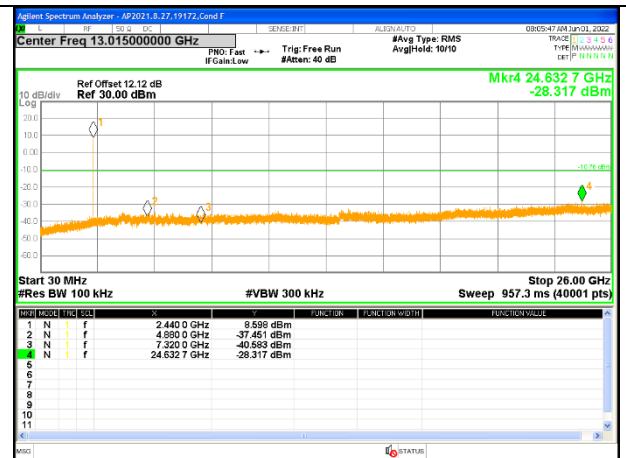







OUT-OF-BAND MID CHANNEL ANT 4

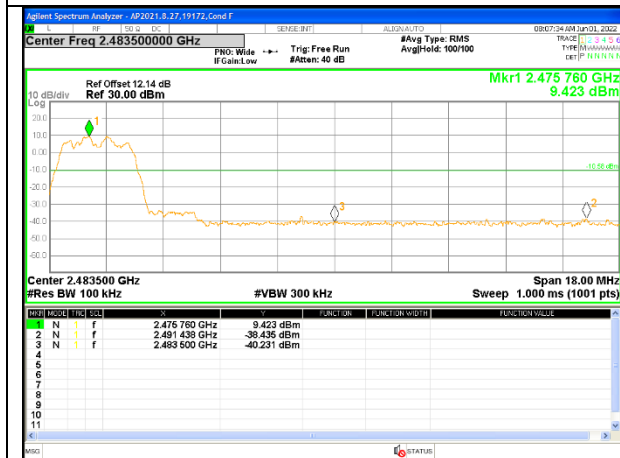

HIGH CHANNEL BANDEDGE ANT 4

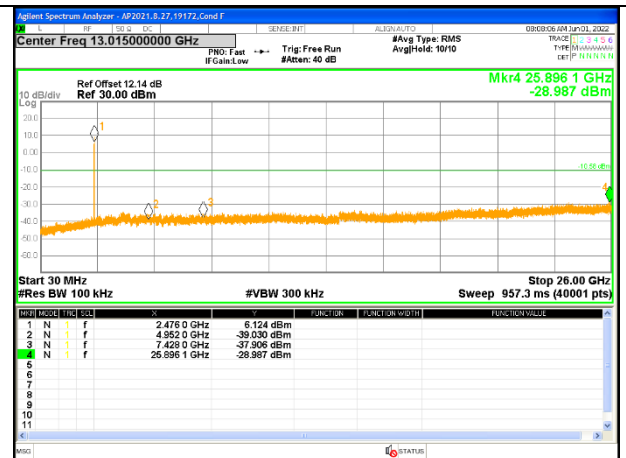


OUT-OF-BAND HIGH CHANNEL ANT 4

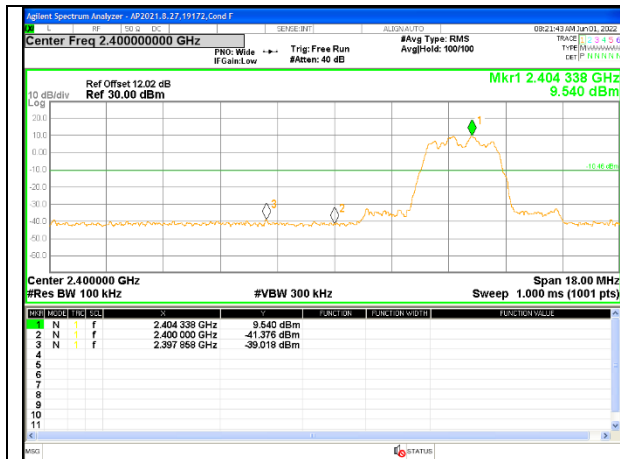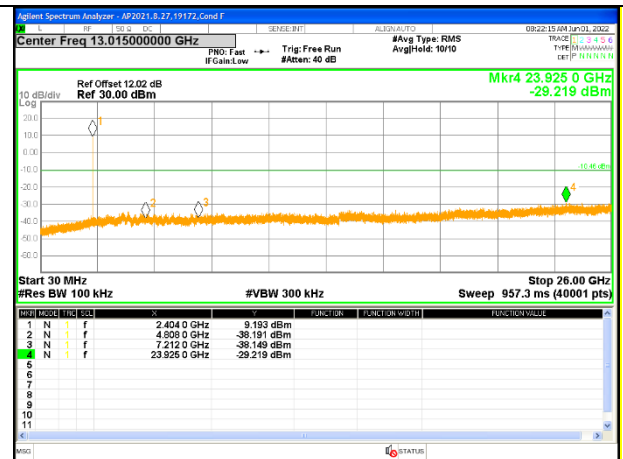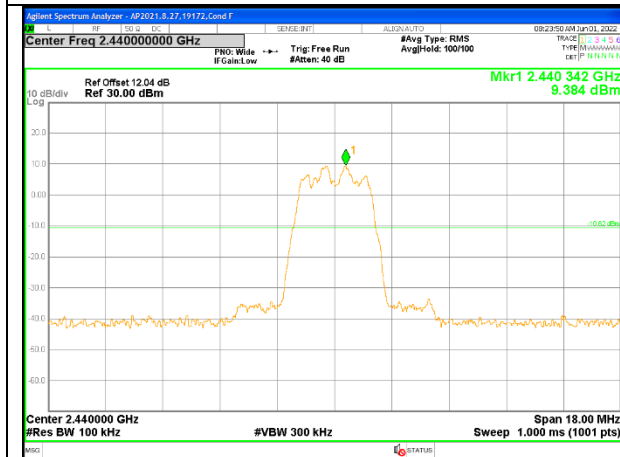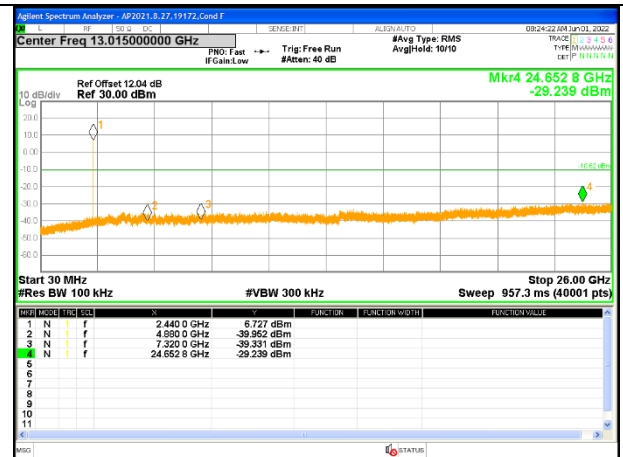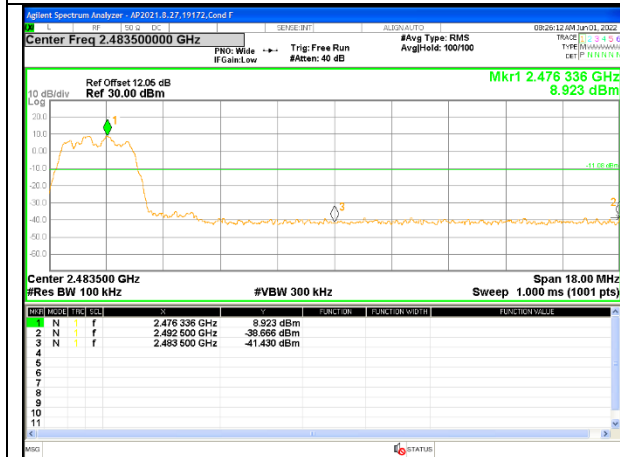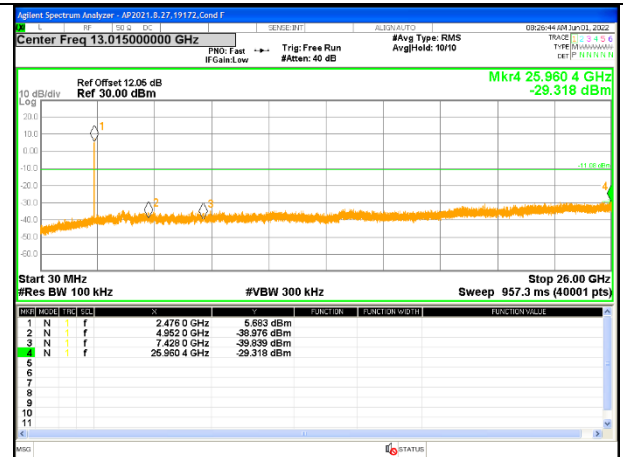
**ANT 3****LOW CHANNEL BANDEDGE ANT 3****OUT-OF-BAND LOW CHANNEL ANT 3****IN-BAND REFERENCE LEVEL ANT 3****OUT-OF-BAND MID CHANNEL ANT 3****HIGH CHANNEL BANDEDGE ANT 3****OUT-OF-BAND HIGH CHANNEL ANT 3**

### 9.7.3. HIGH POWER HDR (HDR8)


#### ANT 4

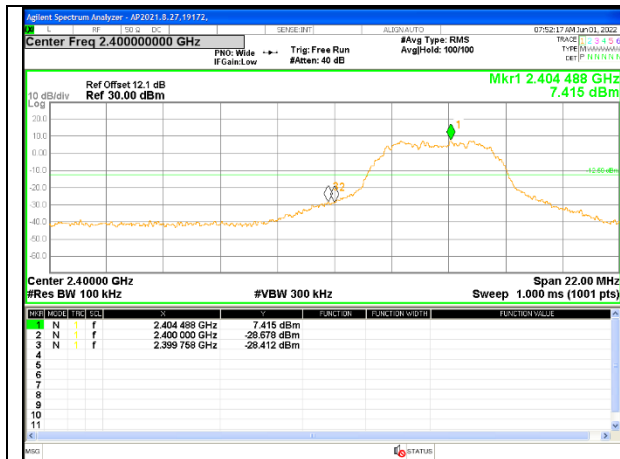


**LOW CHANNEL BANDEDGE**

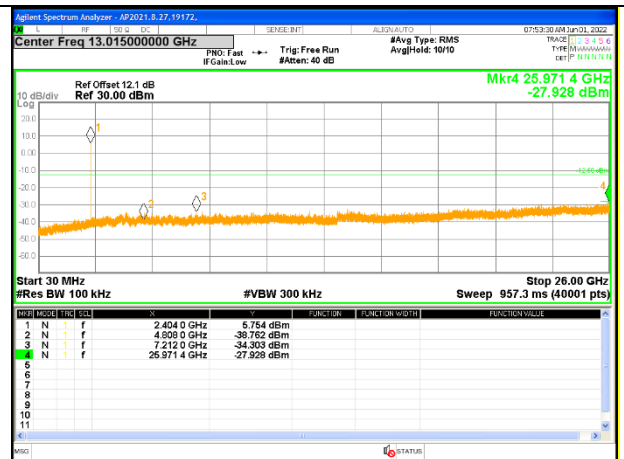


**OUT-OF-BAND LOW CHANNEL**

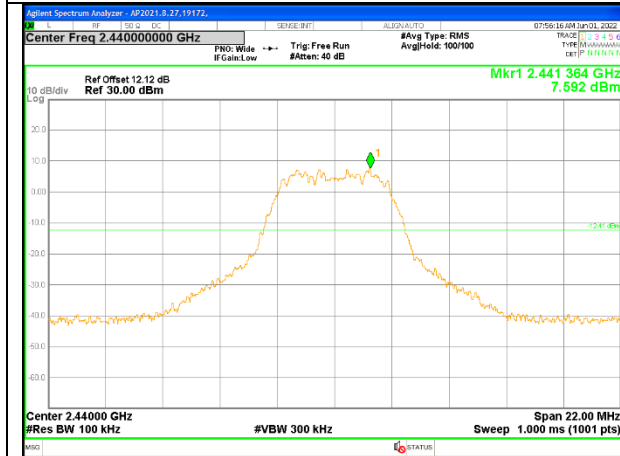


**IN-BAND REFERENCE LEVEL**

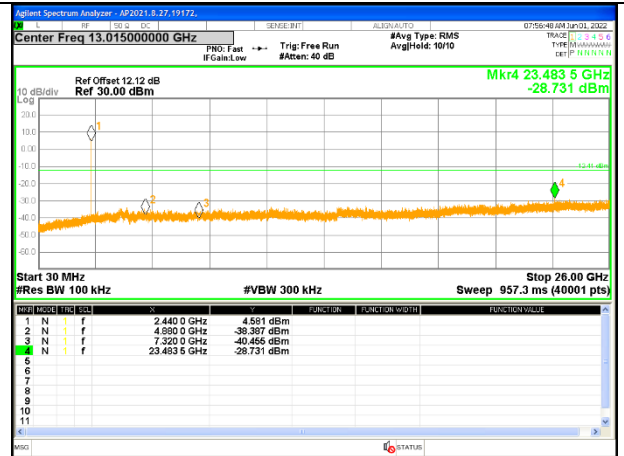







**OUT-OF-BAND MID CHANNEL**

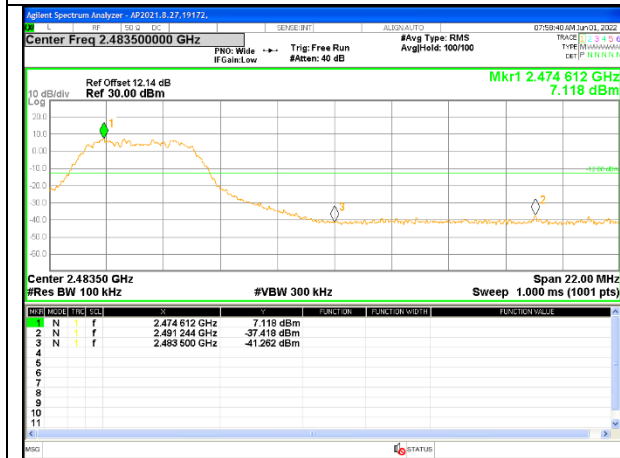

**HIGH CHANNEL BANDEDGE**

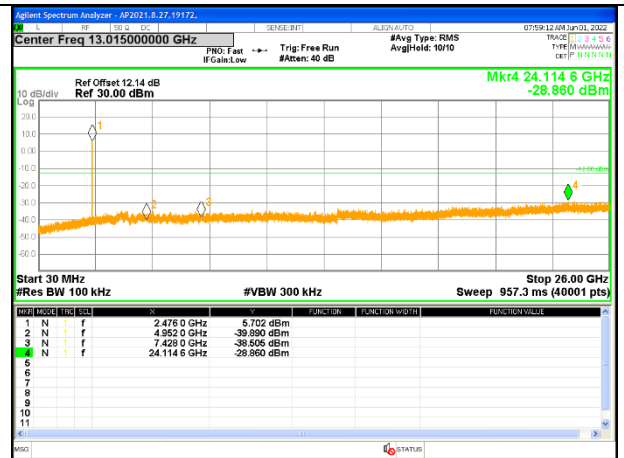


**OUT-OF-BAND HIGH CHANNEL**

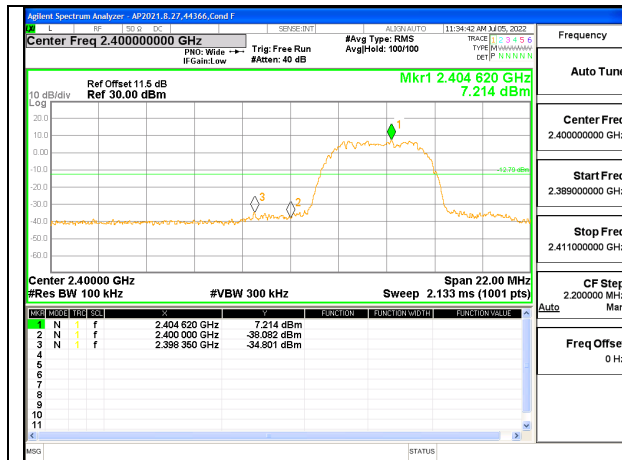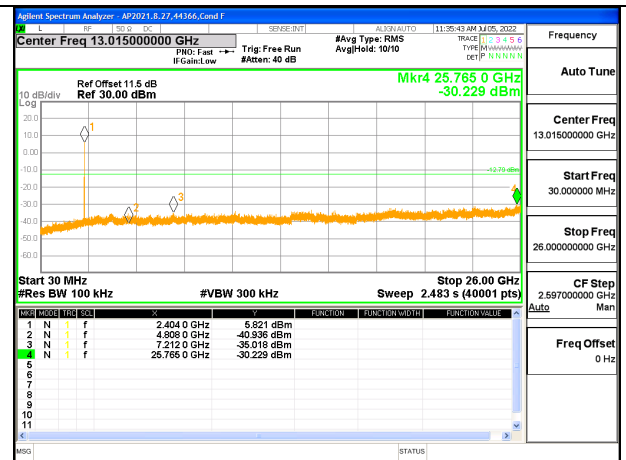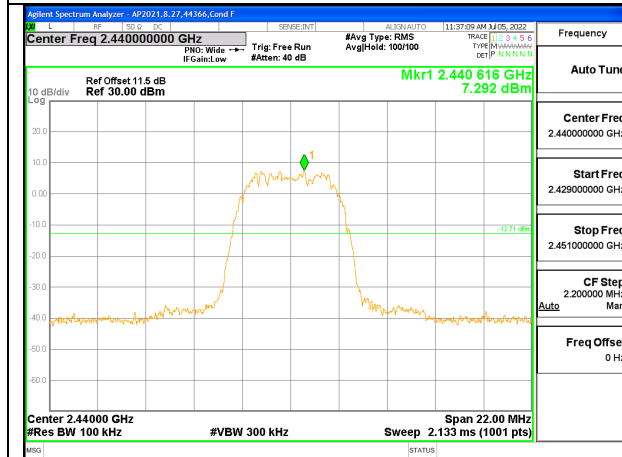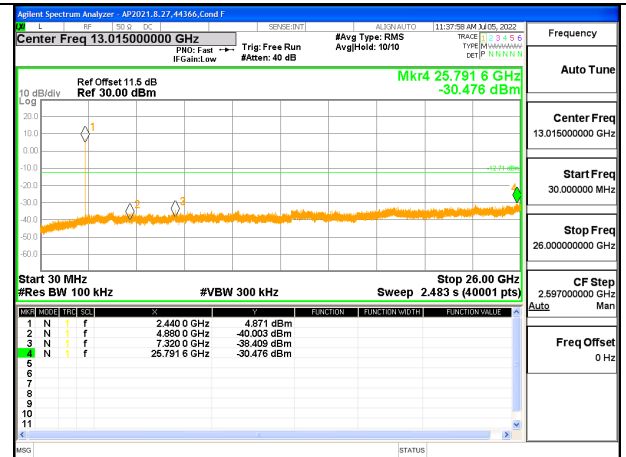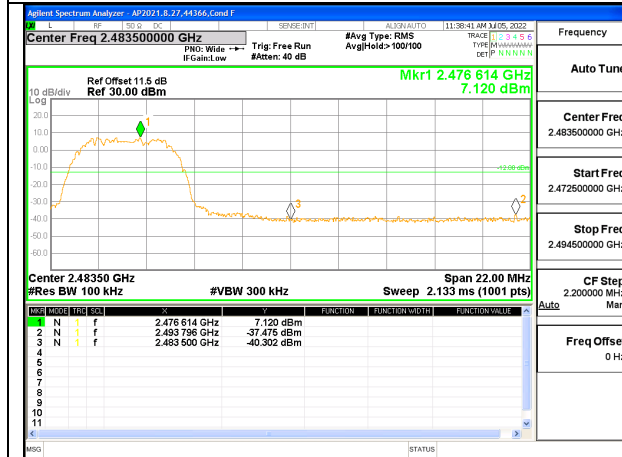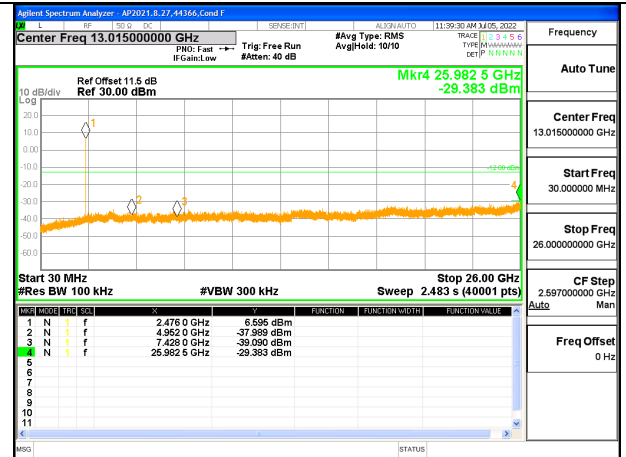**ANT 3****LOW CHANNEL BANDEDGE****OUT-OF-BAND LOW CHANNEL****IN-BAND REFERENCE LEVEL****OUT-OF-BAND MID CHANNEL****HIGH CHANNEL BANDEDGE****OUT-OF-BAND HIGH CHANNEL**




## 9.7.4. HIGH POWER HDR TXBF (HDR8)


## ANT 4

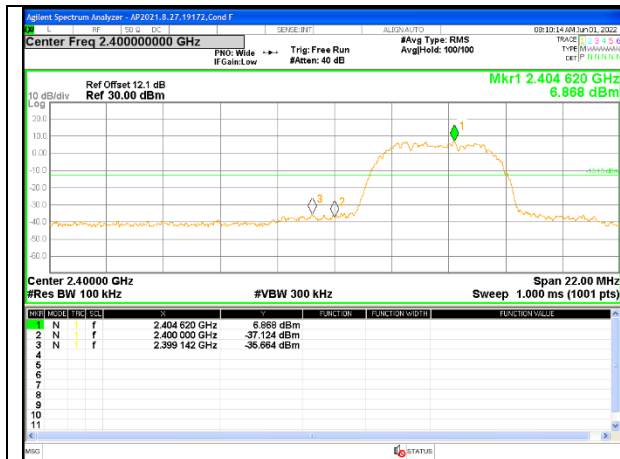


LOW CHANNEL BANDEDGE

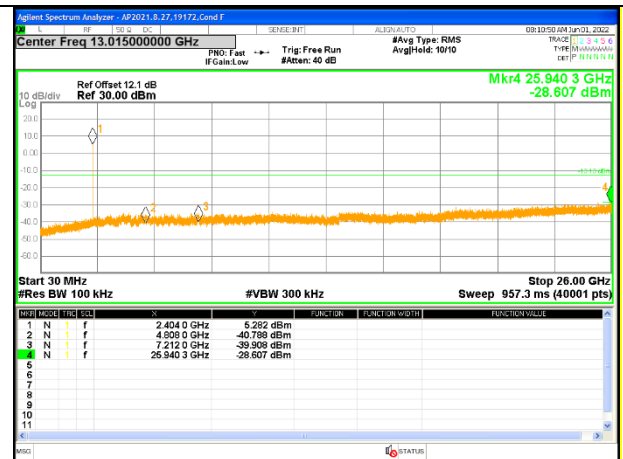


OUT-OF-BAND LOW CHANNEL

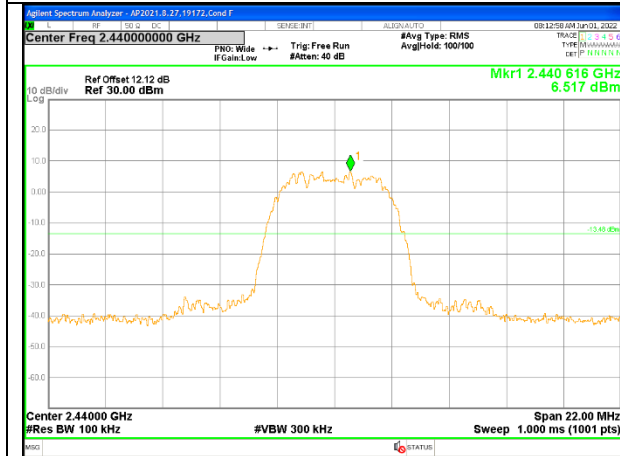


IN-BAND REFERENCE LEVEL

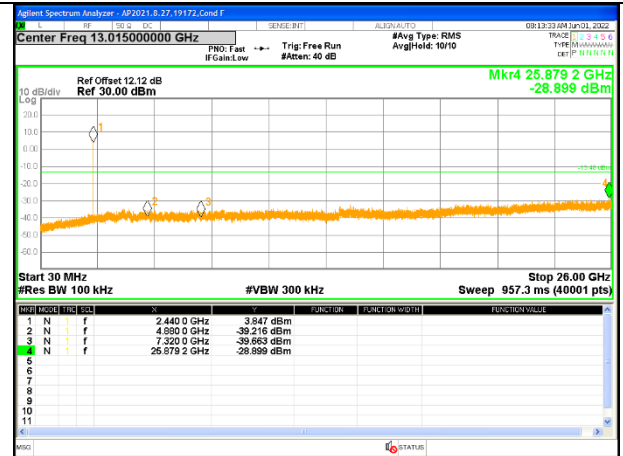

OUT-OF-BAND MID CHANNEL






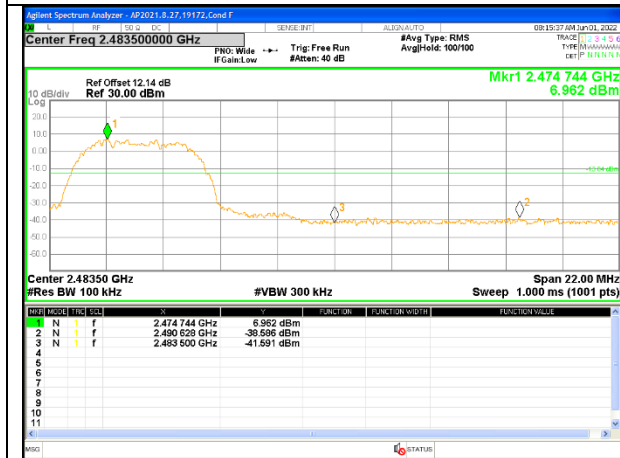


HIGH CHANNEL BANDEDGE

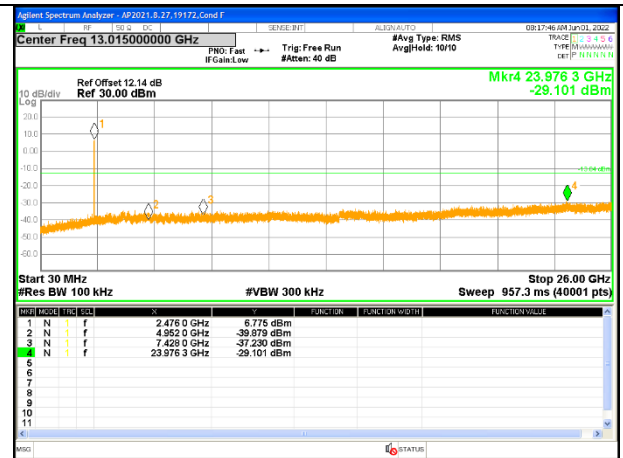


OUT-OF-BAND HIGH CHANNEL

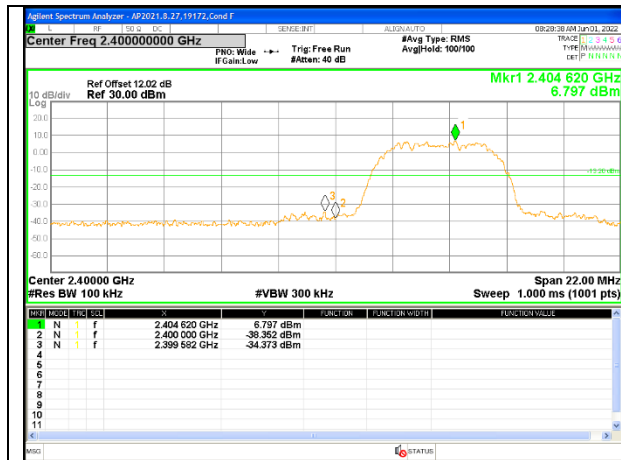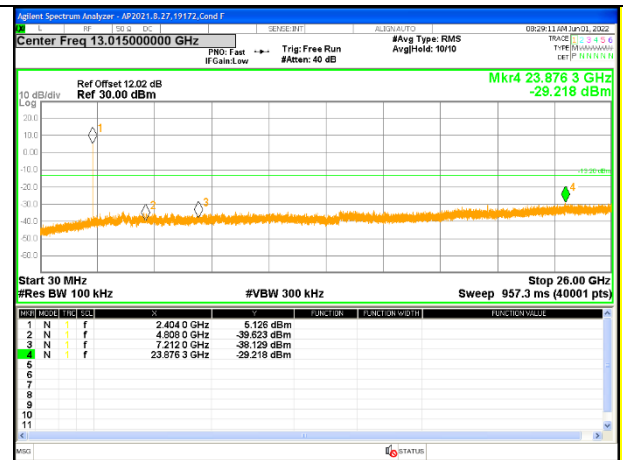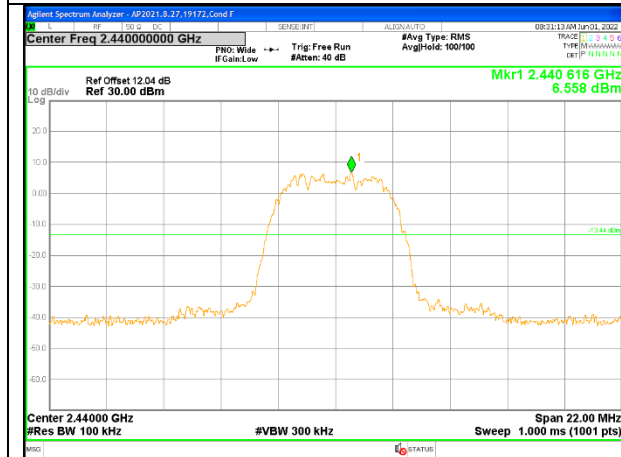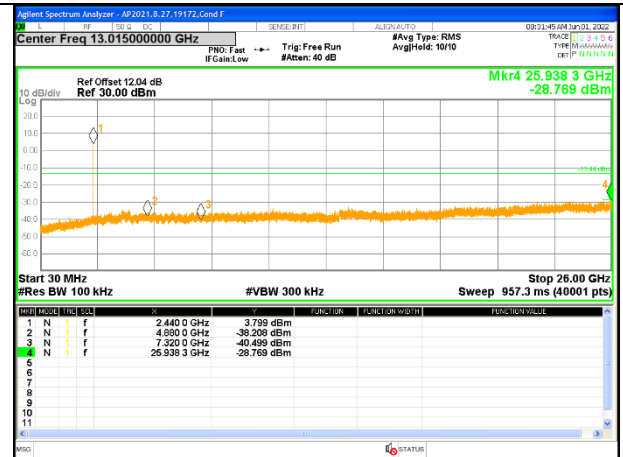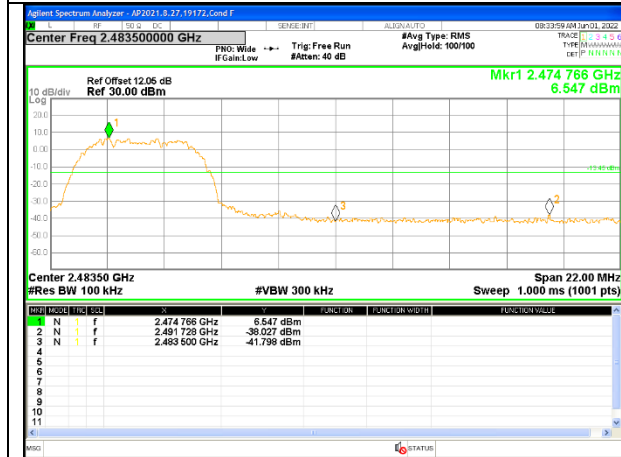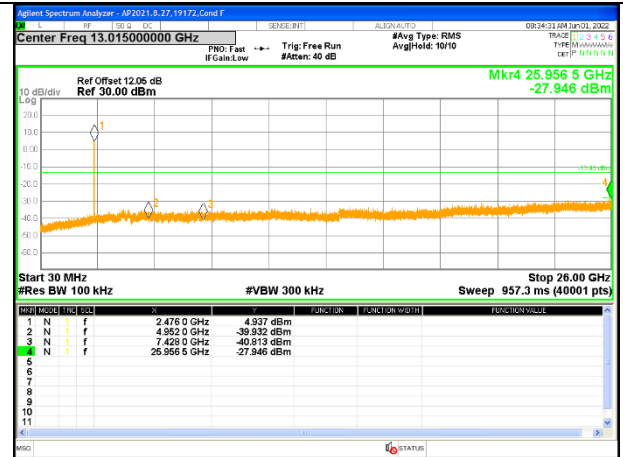


**ANT 3****LOW CHANNEL BANDEDGE****OUT-OF-BAND LOW CHANNEL****IN-BAND REFERENCE LEVEL****OUT-OF-BAND MID CHANNEL****HIGH CHANNEL BANDEDGE****OUT-OF-BAND HIGH CHANNEL**

## 9.7.5. LOW POWER HDR (HDR4)


ANT 4

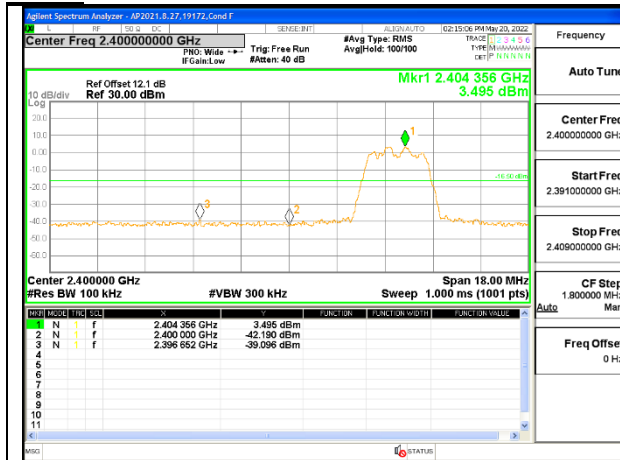


LOW CHANNEL BANDEDGE

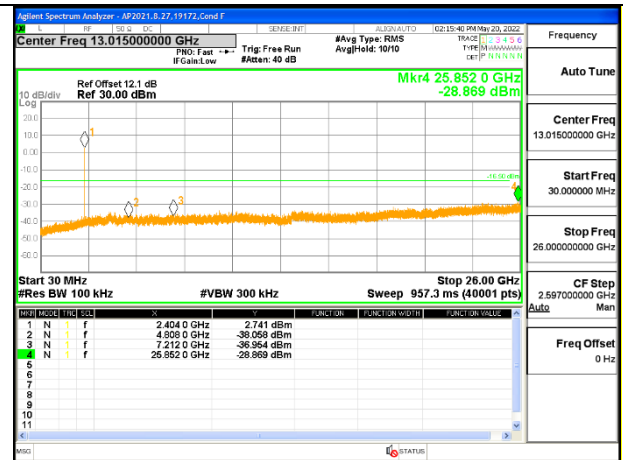


OUT-OF-BAND LOW CHANNEL

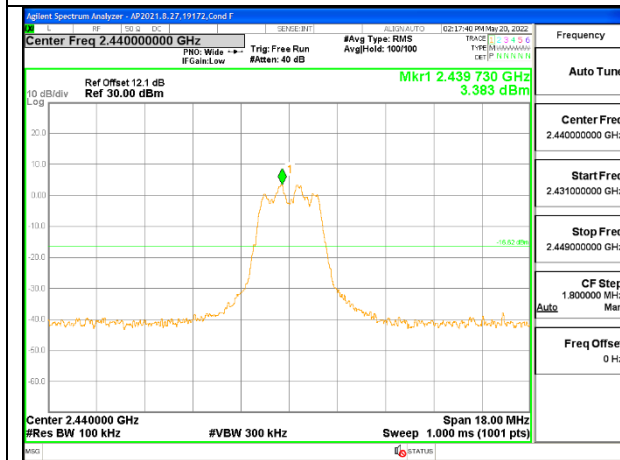


IN-BAND REFERENCE LEVEL

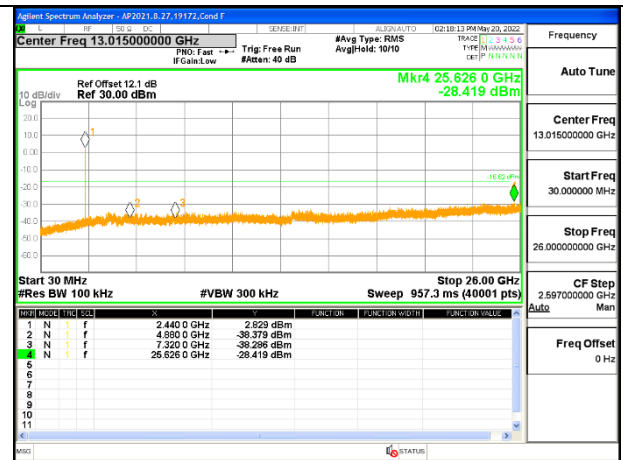

OUT-OF-BAND MID CHANNEL

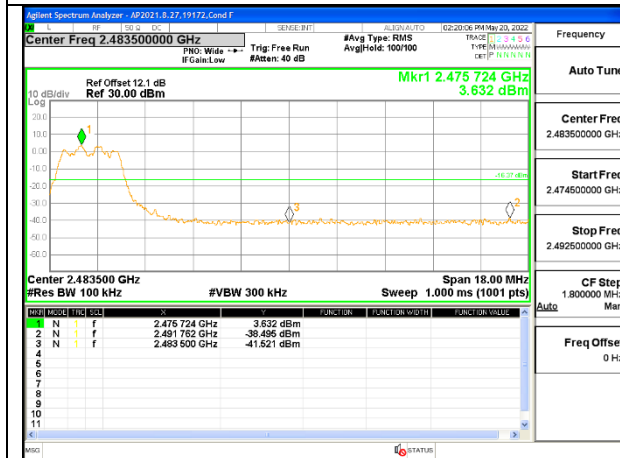


HIGH CHANNEL BANDEDGE

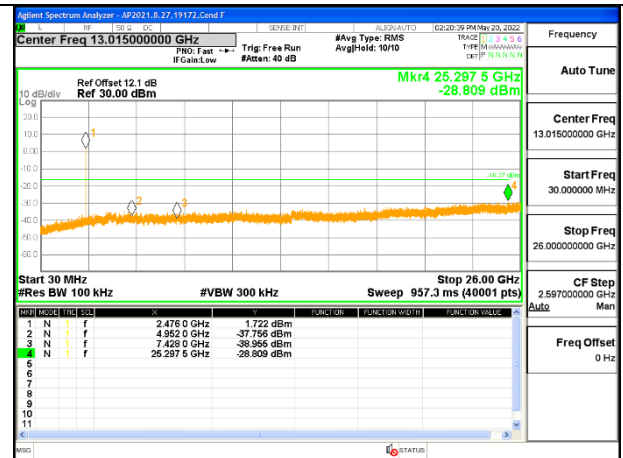


OUT-OF-BAND HIGH CHANNEL


## ANT 3

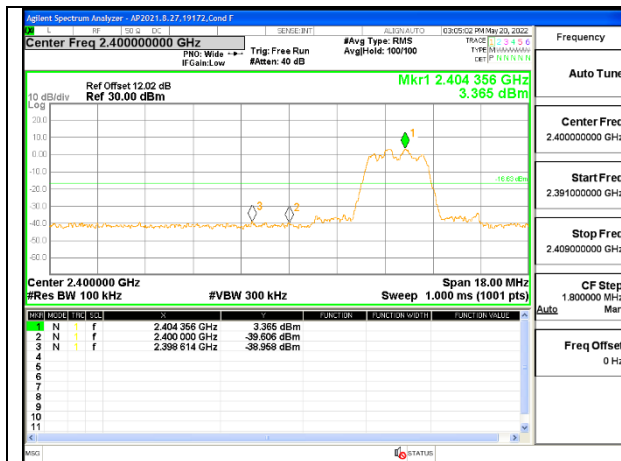


## LOW CHANNEL BANDEDGE

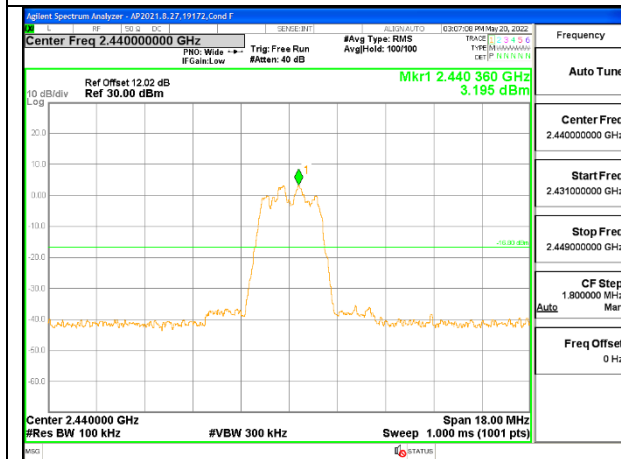


## IN-BAND REFERENCE LEVEL

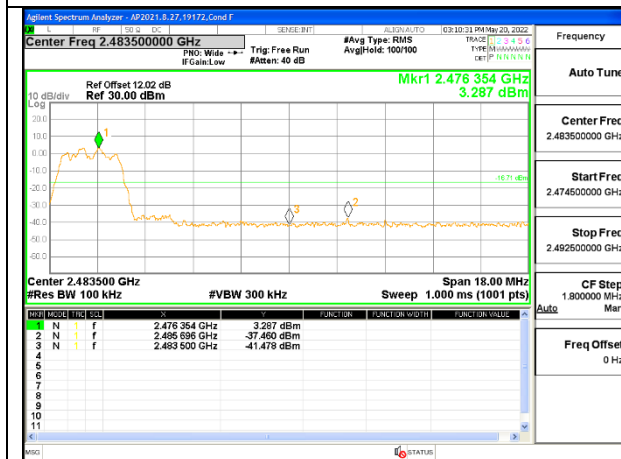


## HIGH CHANNEL BANDEDGE

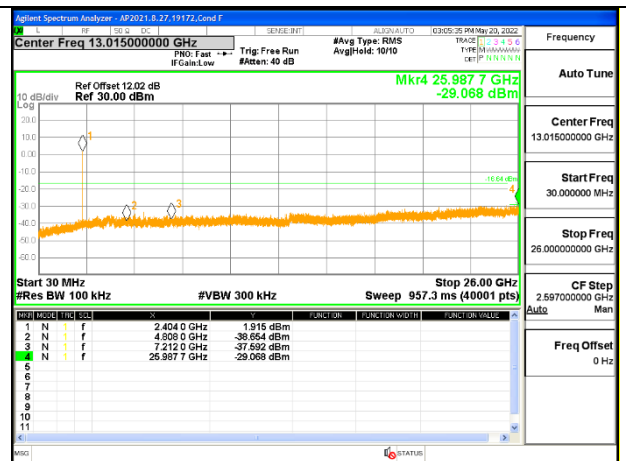

## OUT-OF-BAND LOW CHANNEL

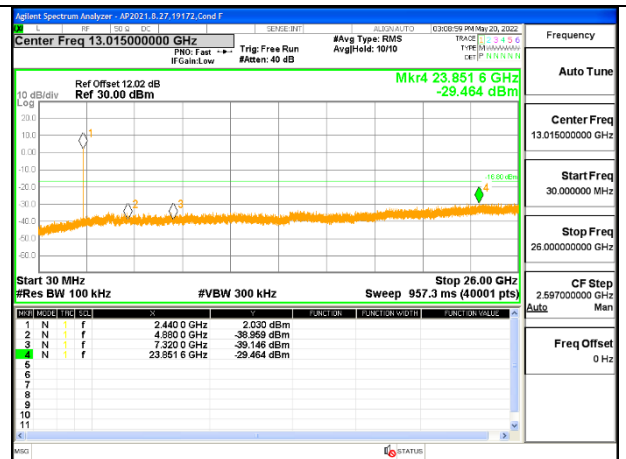



## OUT-OF-BAND MID CHANNEL

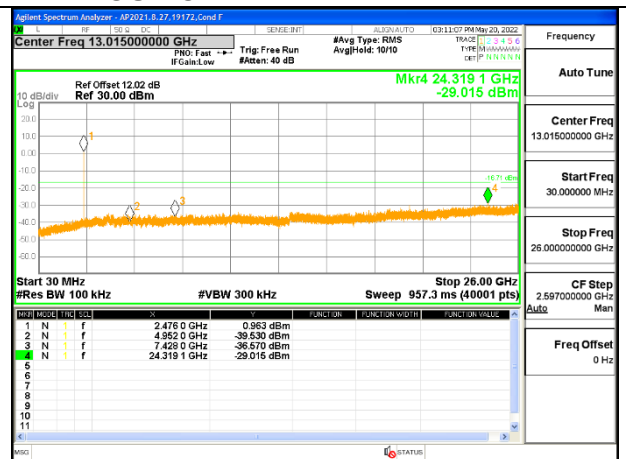


## OUT-OF-BAND HIGH CHANNEL

## 9.7.6. LOW POWER HDR TXBF (HDR4)


## ANT 4

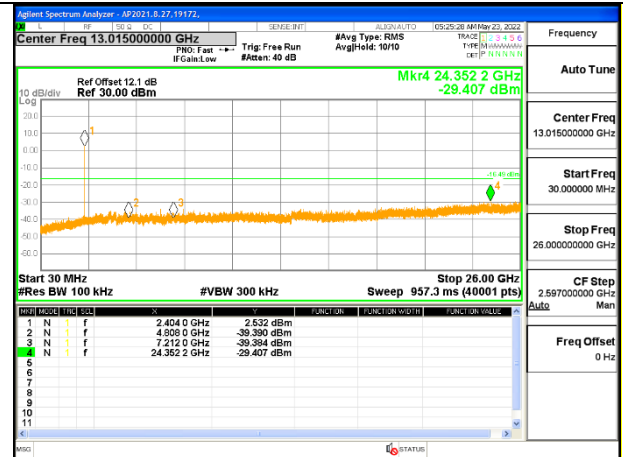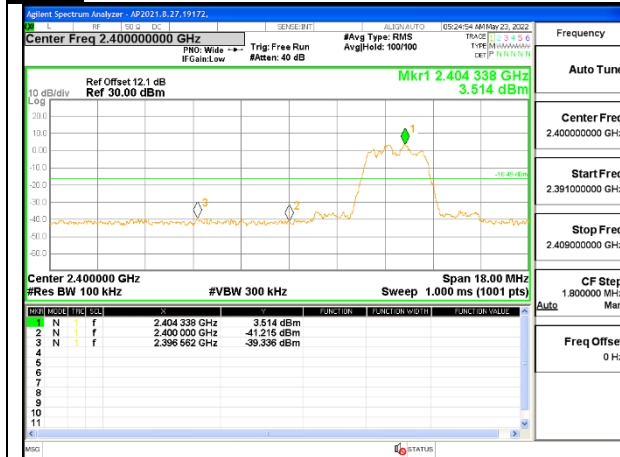


## LOW CHANNEL BANDEDGE ANT 4

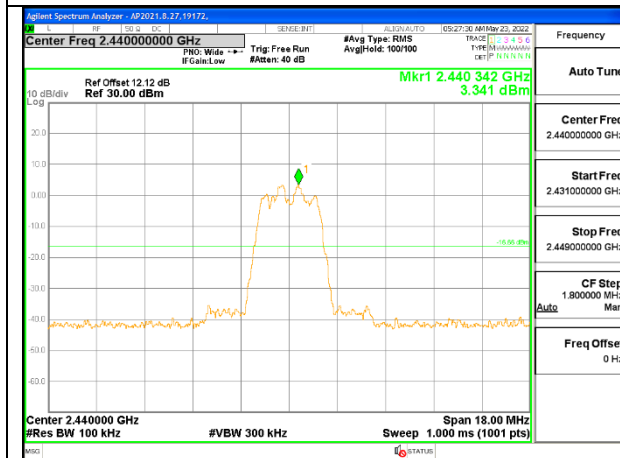


## OUT-OF-BAND LOW CHANNEL ANT 4

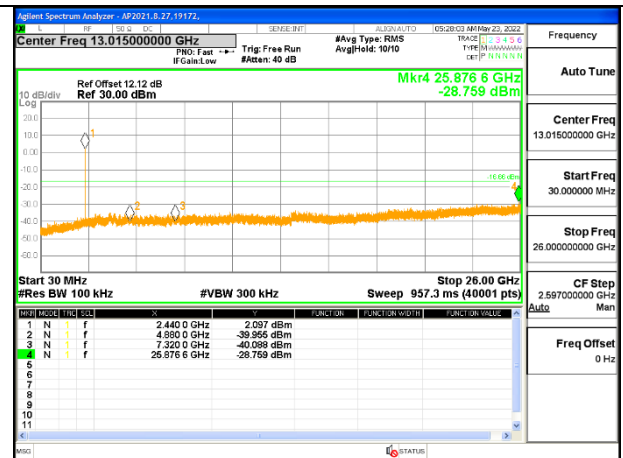

## IN-BAND REFERENCE LEVEL ANT 4

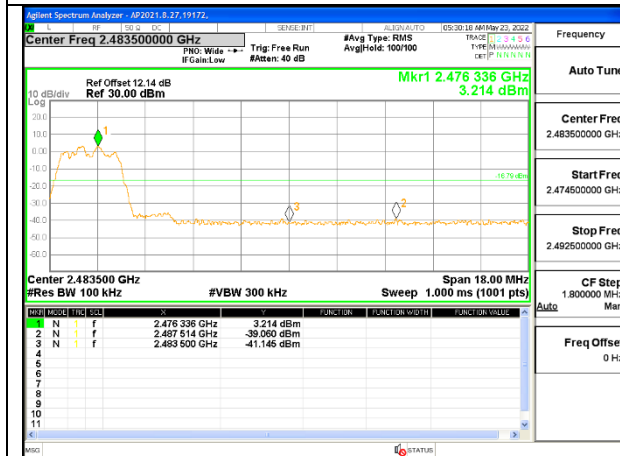

## OUT-OF-BAND MID CHANNEL ANT 4

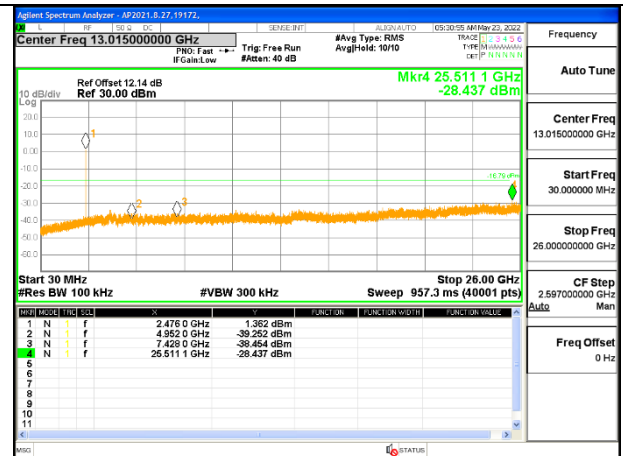

## HIGH CHANNEL BANDEDGE ANT 4

## OUT-OF-BAND HIGH CHANNEL ANT 4