

# TEST REPORT

**Report Number:** 14523758-E1V3

**Applicant :** APPLE, INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A.

**Model :** A2846 (Parent Model)  
A3089, A3090, A3092 (Variant Models)

**Brand :** APPLE

**FCC ID :** BCG-E8427A (Parent Model)  
BCG-E8428A, BCG-E8429A, BCG-E8430A (variant Models)

**IC :** 579C-E8427A (Parent Model)  
579C-E8428A, 579C-E8429A, 579C-E8430A (Variant  
Models)

**EUT Description :** SMARTPHONE

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C  
ISED RSS-247 ISSUE 2  
ISED RSS-GEN ISSUE 5 + A1 + A2

**Date Of Issue:**  
July 19, 2023

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538 U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888



---

**REPORT REVISION HISTORY**

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	7/12/2023	Initial Issue	Chin Pang
V2	7/14/2023	Address TCB's question section 5 and 6	Chin Pang
V3	7/19/2023	Retest 8PSK BE and measure power and section 9.5	Chin Pang

---

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST SUMMARY .....</b>	<b>8</b>
<b>3. TEST METHODOLOGY .....</b>	<b>8</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>9</b>
<b>5. DECISION RULES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
5.1. <i>METROLOGICAL TRACEABILITY .....</i>	<i>9</i>
5.2. <i>DECISION RULES.....</i>	<i>9</i>
5.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>10</i>
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>11</b>
6.1. <i>EUT DESCRIPTION .....</i>	<i>11</i>
6.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>12</i>
6.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>13</i>
6.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>13</i>
6.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>13</i>
6.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>14</i>
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>18</b>
<b>8. MEASUREMENT METHODS .....</b>	<b>20</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>21</b>
9.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>21</i>
9.2. <i>20 dB AND 99% BANDWIDTH .....</i>	<i>22</i>
9.2.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION.....</i>	<i>23</i>
9.2.2. <i>HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....</i>	<i>24</i>
9.2.3. <i>HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....</i>	<i>25</i>
9.2.4. <i>HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....</i>	<i>26</i>
9.3. <i>HOPPING FREQUENCY SEPARATION .....</i>	<i>27</i>
9.3.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION.....</i>	<i>28</i>
9.4. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>29</i>
9.4.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION.....</i>	<i>30</i>
9.5. <i>AVERAGE TIME OF OCCUPANCY.....</i>	<i>32</i>
9.5.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION.....</i>	<i>33</i>
9.6. <i>OUTPUT POWER.....</i>	<i>37</i>
9.6.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION.....</i>	<i>39</i>
9.6.2. <i>HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....</i>	<i>39</i>
9.6.3. <i>HIGH POWER ENHANCED DATA RATE QPSK MODULATION .....</i>	<i>40</i>
9.6.4. <i>HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION .....</i>	<i>40</i>

9.6.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	41
9.6.6.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	41
9.6.7.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	42
9.6.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	42
9.6.9.	LOW POWER ENHANCED DATA RATE QPSK MODULATION .....	43
9.6.10.	LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION.....	43
9.6.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	44
9.6.12.	LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	44
<b>9.7.</b>	<b>AVERAGE POWER.....</b>	<b>45</b>
9.7.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	46
9.7.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	46
9.7.3.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION .....	47
9.7.4.	HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION .....	47
9.7.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	48
9.7.6.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	48
9.7.7.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	49
9.7.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	49
9.7.9.	LOW POWER ENHANCED DATA RATE QPSK MODULATION .....	50
9.7.10.	LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION.....	50
9.7.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	51
9.7.12.	LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	51
<b>9.8.</b>	<b>CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>52</b>
9.8.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	53
9.8.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	57
9.8.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	61
9.8.4.	HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION .....	65
9.8.5.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	69
9.8.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	73
9.8.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	77
9.8.8.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION .....	81
<b>10.</b>	<b>RADIATED TEST RESULTS .....</b>	<b>85</b>
10.1.	TRANSMITTER ABOVE 1 GHz.....	87
10.1.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION .....	87
10.1.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION .....	95
10.1.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	99
10.1.4.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION.....	107
10.1.5.	LOW POWER BASIC DATA RATE GFSK MODULATION .....	111
10.1.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION .....	119
10.1.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	123
10.1.8.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION.....	131
10.1.9.	HARMONICS AND SPURIOUS EMISSIONS.....	135
10.1.10.	8PSK TXBF HARMONICS AND SPURIOUS EMISSIONS.....	141
10.2.	WORST CASE BELOW 1 GHZ.....	147
10.3.	WORST CASE 18-26 GHZ.....	149
<b>11.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>151</b>
11.1.	AC Power Line With AC/DC Adapter.....	152
11.2.	AC Power Line With Laptop.....	154

---

**12. SETUP PHOTOS .....156**

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A

**EUT DESCRIPTION:** SMARTPHONE

**MODEL:** A2846 (Parent Model)  
A3089, A3090, A3092 (Variant Models)

**BRAND:** APPLE

**SERIAL NUMBER:** P6XL92MQDL, K942WGQWRY

**SAMPLE RECEIPT DATE:** JANUARY 30, 2023

**DATE TESTED:** FEBRUARY 1, 2023 – JULY 19, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For  
UL Verification Services Inc. By:

Prepared By:



---

Chin Pang  
Senior Lab Engineer  
Consumer Technology Division  
UL Verification Services Inc.

---

Tony Li  
Senior Test Engineer  
Consumer Technology Division  
UL Verification Services Inc.

## 2. TEST SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	Per ANSI C63.10, Section 11.6.
See Comment	RSS-GEN 6.7	20dB BW/99% OBW	Reporting purposes only	ANSI C63.10 Sections 6.9.2 and 6.9.3
15.247 (a)(1)	RSS-247 (5.1) (b)	Hopping Frequency Separation	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Number of Hopping Channels	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Average Time of Occupancy	Complies	None.
15.247 (b)(1)	RSS-247 (5.4) (b)	Output Power	Complies	None.
See Comment		Average Power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (d)	RSS-247 (5.5)	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following standards/ rules/ KDBs:

FCC CFR 47 Part 2  
 FCC CFR 47 Part 15  
 ANSI C63.10-2013  
 KDB 558074 D01 15.247 Meas Guidance v05r02  
 KDB 414788 D01 Radiated Test Site v01r01  
 KDB 662911 D01 Multiple Transmitter Output v02r01  
 RSS-GEN Issue 5 + A1:2019 + A2:2021  
 RSS-247 Issue 2.



## 4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
<input type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
<input type="checkbox"/>	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
<input type="checkbox"/>	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

## 5. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

### 5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement).

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U <sub>LAB</sub>
Conducted Antenna Port Emission Measurement	1.94
Time Domain Measurements Using SA	3.39
RF Power Measurement Direct Method Using Power Meter	0.450 (Peak), 1.3 (Ave)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Carrier Frequency Separation	19.70Hz
Number of Hopping Frequencies	0.000dB
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

---

## 6. EQUIPMENT UNDER TEST

### 6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC, 802.15.4ab-NB and MSS technologies. The rechargeable battery is not user accessible.

Testing was performed on the parent model and is used to support the application for the parent and variants identified in this report based on the test plan submitted and approved via KDB inquiry by the FCC and by ISED-Canada.

The Model and FCC/IC ID covered by this report includes:

Parent Model: A2846  
FCC ID: BCG-E8427A  
IC ID: 579C-E8427A

Variant Model: A3089  
FCC ID: BCG-E8428A  
IC ID: 579C-E8428A

Variant Model: A3090  
FCC ID: BCG-E8429A  
IC ID: 579C-E8429A

Variant Model: A3092  
FCC ID: BCG-E8430A  
IC ID: 579C-E8430A

## 6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Config	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2402 - 2480	Basic GFSK	20.26	106.17
		2402 - 2480	DQPSK	19.31	85.31
		2402 - 2480	Enhanced 8PSK	19.51	89.33
	Low Power	2402 - 2480	Basic GFSK	11.70	14.79
		2402 - 2480	DQPSK	11.35	13.65
		2402 - 2480	Enhanced 8PSK	11.55	14.29
ANT 3	High Power	2402 - 2480	Basic GFSK	20.42	110.15
		2402 - 2480	DQPSK	19.22	83.56
		2402 - 2480	Enhanced 8PSK	19.35	86.10
	Low Power	2402 - 2480	Basic GFSK	11.85	15.31
		2402 - 2480	DQPSK	11.50	14.13
		2402 - 2480	Enhanced 8PSK	11.52	14.19
BF, ANT 4 + ANT 3	High Power	2402 - 2480	Basic GFSK TxBF	20.30	107.15
		2402 - 2480	DQPSK TxBF	19.35	86.10
		2402 - 2480	Enhanced 8PSK TxBF	19.43	87.70
	Low Power	2402 - 2480	Basic GFSK TxBF	14.65	29.17
		2402 - 2480	DQPSK TxBF	14.32	27.04
		2402 - 2480	Enhanced 8PSK TxBF	14.42	27.67

**Note:** GFSK, DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on these modes to show compliance.

### 6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:  
Cable loss provided by client is 1.96dB

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	-1.0	-1.9

### 6.4. SOFTWARE AND FIRMWARE

The EUT firmware version installed during testing was 21.1.547.9123

### 6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4, ANT 3 and 2TX beamforming. It was determined that X (Flatbed) orientation was the worst-case orientation for ANT 3 and ANT 4 and Y(Landscape) for beamforming 2TX.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit

For below 1GHz tests EUT was connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BT and 5GHz bands, No noticeable emission was found.

For radiated harmonic spurious emissions test, beamforming GFSK and 8PSK modes were set to maximum power per chain based on SISO power to cover both non-BF and BF modes to complies with radiated spurious emissions limits in the restricted bands between 1GHz and 18GHz low/mid/high channel.

GFSK, DQPSK, 8PSK average power are all investigated, The GFSK & 8PSK power are the worst case. For average power data please refer to section 9.7.

Worst-case data rates as provided by the client were:

GFSK mode: DH5

8PSK mode: 3-DH5

Beamforming : GFSK, DH5, 8PSK, 3-DH5

Note: In the Radiated Plots and emissions data, ANT0=ANT4 and ANT1=ANT3.



## 6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC		
Laptop	Apple	Macbook Pro	C02VD7SAHV22	BCGA1708		
Laptop AC/DC adapter	Liteon Technology	A1424	NSW25679	DoC		
EUT AC/DC adapter	Apple	A1720	C3D8417A7R93KVPA8	DoC		
Conducted Switch Box	UL	n/a	208281	N/A		
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236358	N/A		
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	SMA	1	SMA	Shielded	0.75	To spectrum Analyzer
2	Antenna	2	SMA	Un-shielded	0.2	To Conducted Switch Box
3	USB-C	1	USB-C	Shielded	1.0	N/A
4	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Shielded	1	N/A


### TEST SETUP

The EUT setup is shown as below. Test software exercised the radio card.

**SETUP DIAGRAM FOR RF CONDUCTED TESTS**

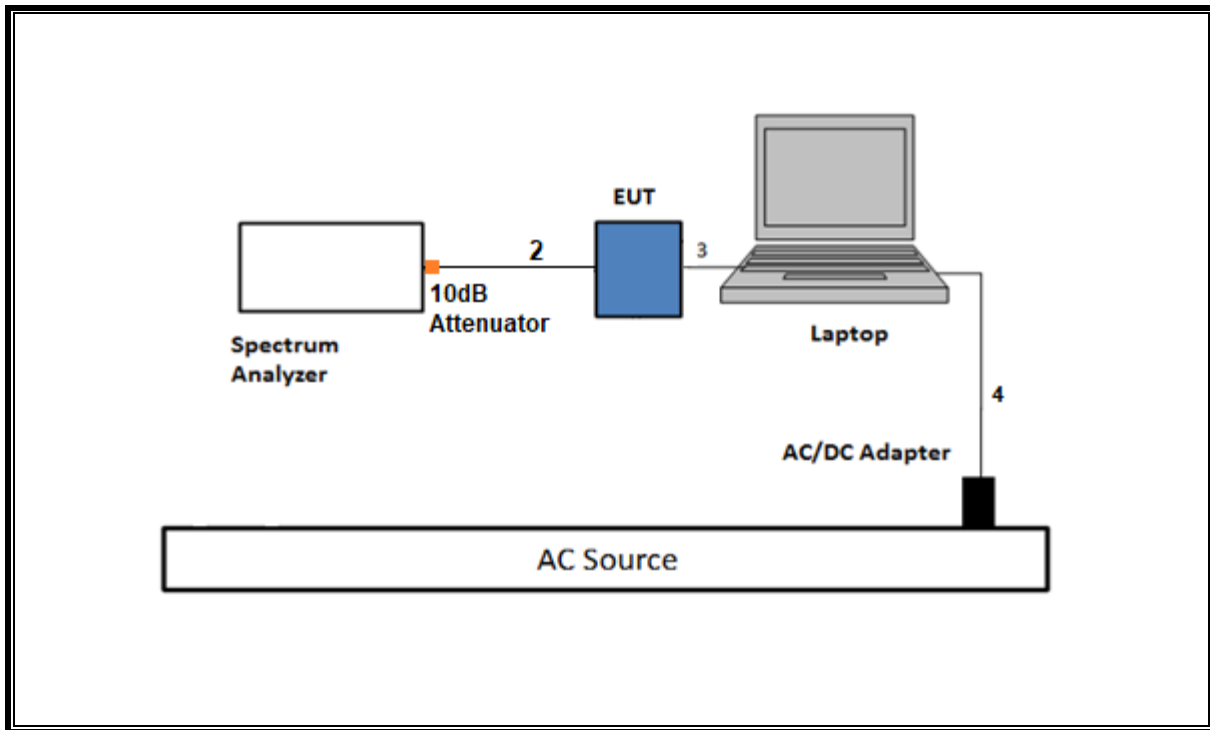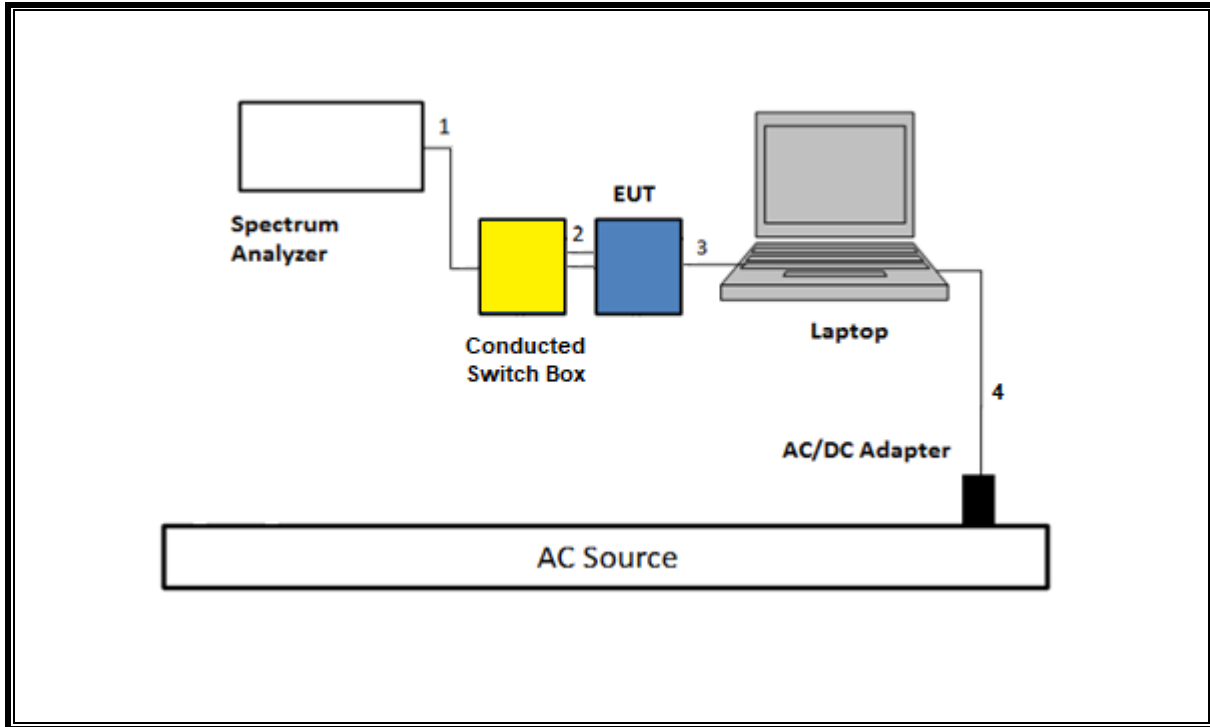


**SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz**

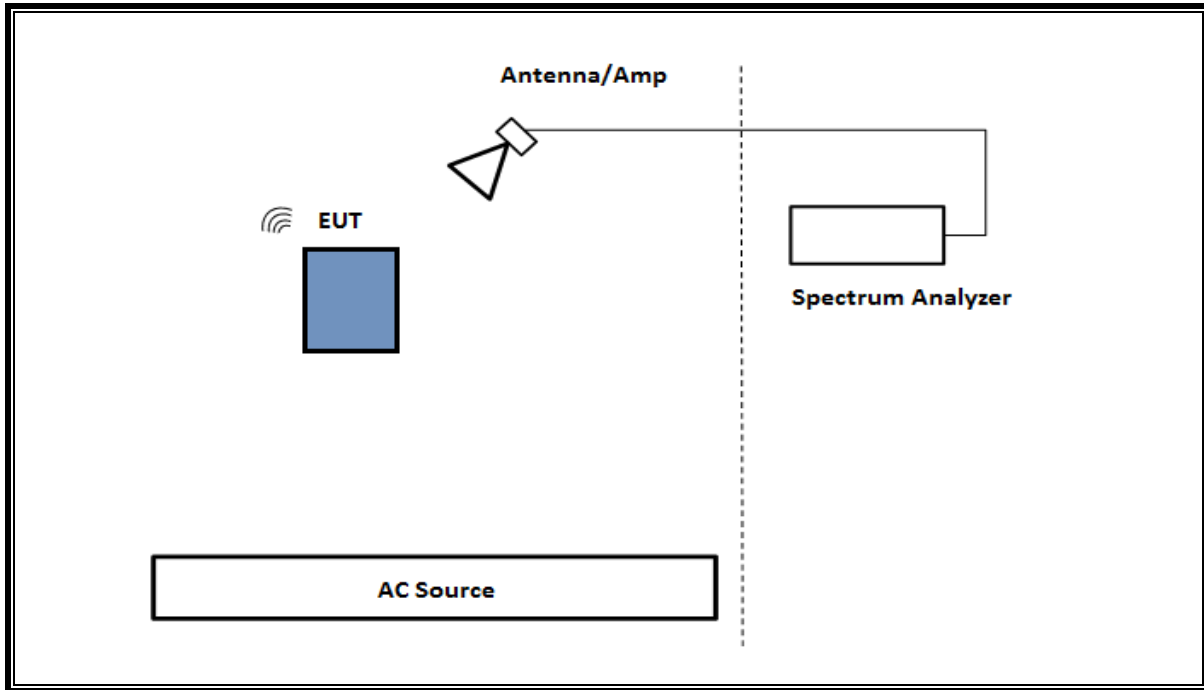




**SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST**

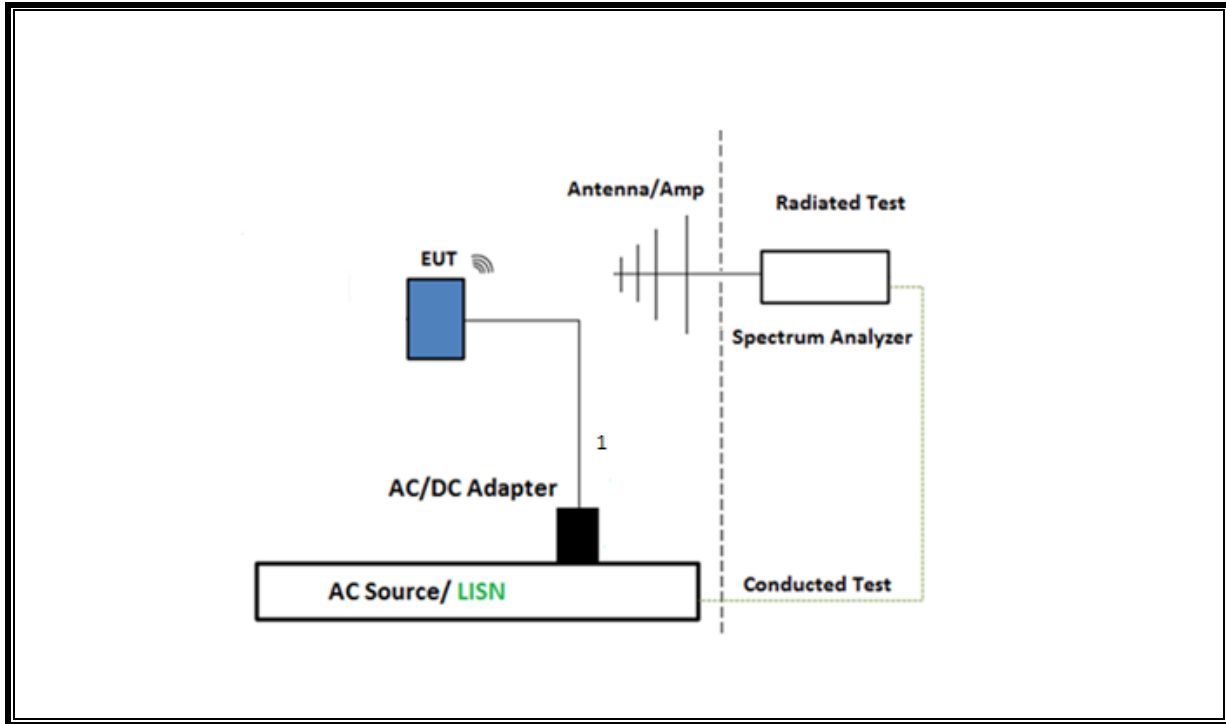

**TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

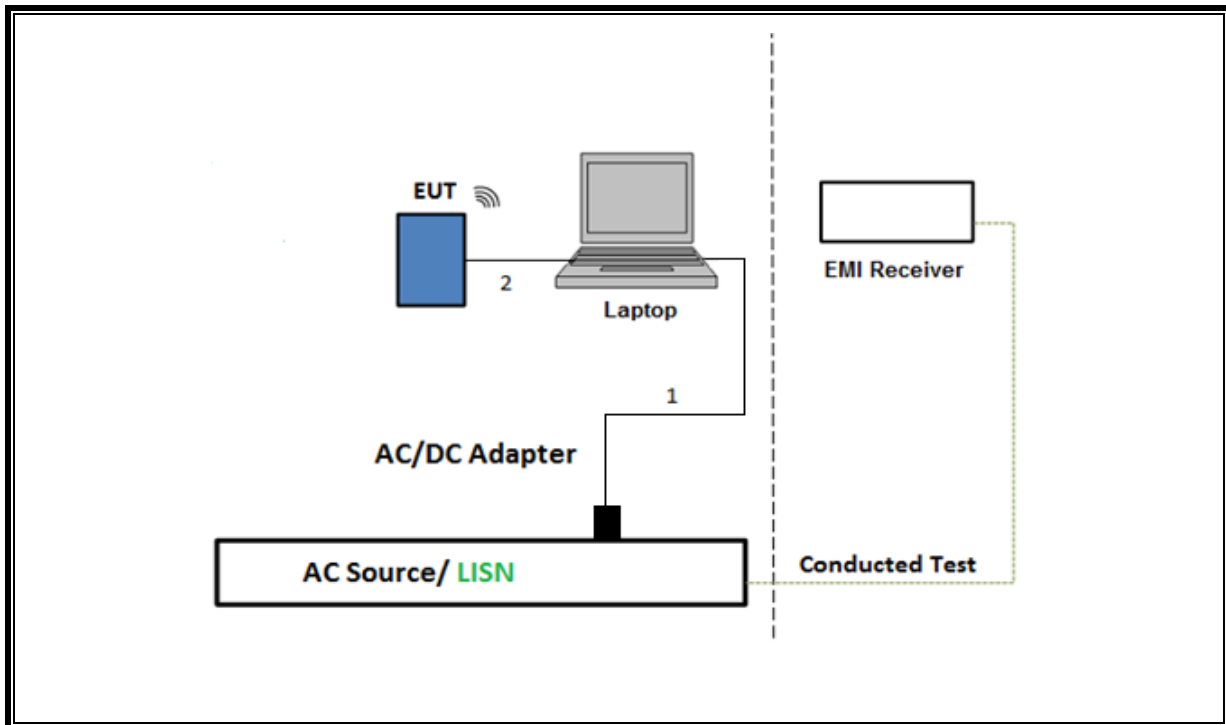

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Horn 1-18GHz	ETS Lindgren	3117	84797	09/20/2023	09/20/2022
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp	JB3	80714	10/06/2023	10/06/2022
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	204041	08/24/2023	08/24/2022
Antenna, Horn 1-18GHz	ETS Lindgren	3117	226673	01/09/2024	01/09/2023
Filter Box, 1-18GHz 12 Port	UL-FR1	Frankenstein	217255	08/23/2023	08/23/2022
EMI Receiver	Rohde & Schwarz	ESW44	201497	02/29/2024	02/29/2023
Antenna, Horn 1-18GHz	ETS Lindgren	3117	222740	08/31/2023	08/31/2022
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	216812	09/17/2023	09/17/2022
EMI Receiver	Rohde & Schwarz	ESW44	235670	04/30/2024	04/30/2023
EMI Receiver	Rohde & Schwarz	ESW44	201498	02/29/2024	02/29/2023
*EMI Receiver	Rohde & Schwarz	ESW44	169935	02/19/2023	02/19/2022
RF Filter Box 1-18GHz	UL-FR1	SAC 12 port rf box	217521	10/09/2023	10/09/2022
*Antenna Horn, 18 to 26.5GHz	ARA	MWH-1826/B	172353	06/01/2023	06/01/2022
RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	171583	02/29/2024	02/29/2023
Antenna, Passive Loop 30Hz to 1MHz	Electro-Metrics	EM-6871	170013	07/28/2023	07/28/2022
Antenna, Passive Loop 100KHz to 30MHz	ETS-Lindgren	EM-6872	170015	07/28/2023	07/28/2022
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Keysight Technologies Inc	E4440A	81311	02/29/2024	02/29/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	125179	02/29/2024	02/29/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	E4446A	80396	01/31/2024	01/31/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	87738	01/31/2024	01/31/2023
*Conducted Switch Box	N/A	CSB	221008	06/21/2023	06/21/2022
Conducted Switch Box	N/A	CSB	208281	04/30/2024	04/30/2023
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236358	Verified/Characterized before use	
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236355	Verified/Characterized before use	
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90756	01/31/2024	01/31/2023
Power Sensor, P-series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	01/31/2024	01/31/2023

\*Testing is completed before equipment expiration date

<b>AC Line Conducted</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>ID Num</b>	<b>Cal Due</b>	<b>Last Cal</b>
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	93091	02/29/2024	02/29/2023
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN- 50/250-25-2-01- 480V	175764	01/31/2024	01/31/2023
Transient Limiter	TE	TBFL1	207996	07/15/2023	07/15/2022
<b>UL AUTOMATION SOFTWARE</b>					
Radiated Software	UL	UL EMC	Ver 9.5, May 1 , 2023		
Conducted Software	UL	UL EMC	2020.8.16		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, Mar 3, 2023		

## 8. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3, 6.5 & 13

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3, 6.6 & 13

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5 & 13

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.

#### PROCEDURE



ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
Bluetooth GFSK	4.00	4.00	1.000	100.0%	0.00	0.010
Bluetooth 8PSK	4.00	4.00	1.000	100.0%	0.00	0.010

Note: There are the same duty cycle factor on 1TX and 2TX.

#### DUTY CYCLE PLOTS

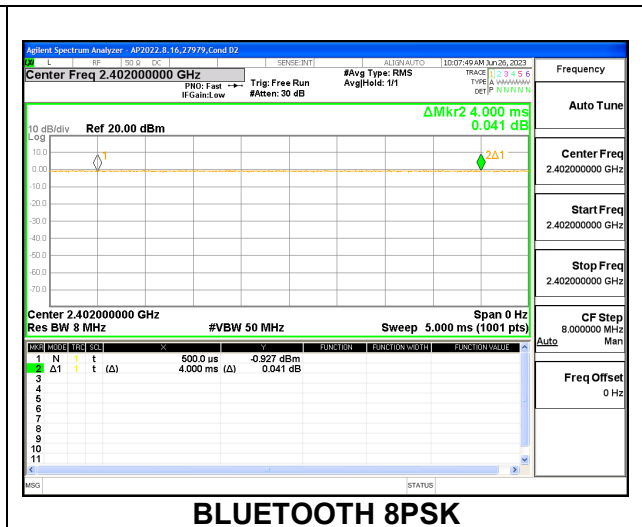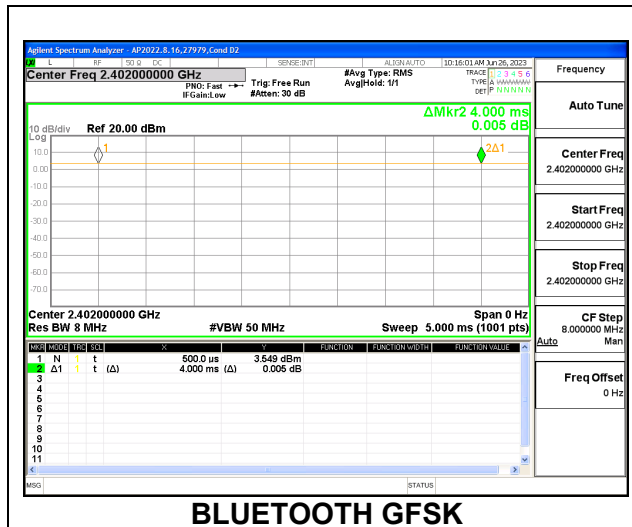

## **9.2. 20 dB AND 99% BANDWIDTH**

### **LIMITS**

None; for reporting purposes only.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq 3 \times \text{RBW}$ . The sweep time is coupled.


### **RESULTS**

Only High-Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

### 9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

**ANT 4**


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.956	0.894
Mid	2441	0.954	0.896
High	2480	0.954	0.894

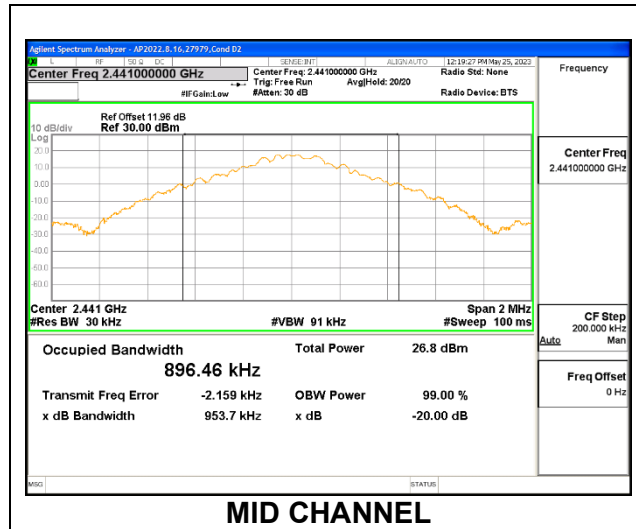

**MID CHANNEL**

**ANT 3**

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.953	0.887
Mid	2441	0.954	0.887
High	2480	0.951	0.887

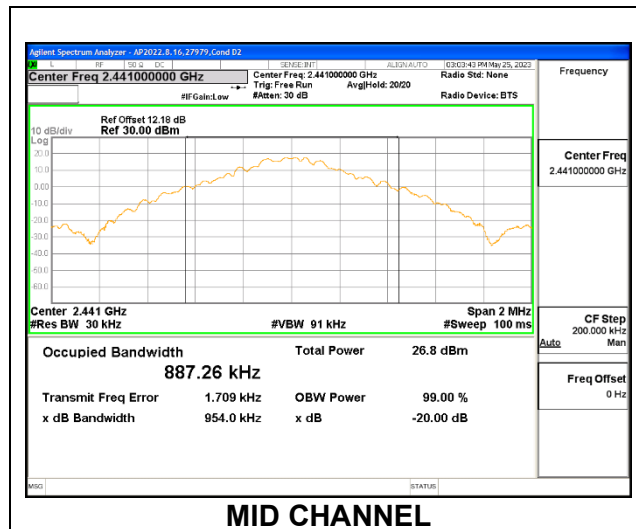


**MID CHANNEL**

## 9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

**Note:** Test procedures and setting on beamforming mode are same as BT basic and EDR mode

Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	0.88700	0.92200	0.86644	0.86869
Mid	2441	0.88860	0.88780	0.86622	0.86633
High	2480	0.88800	0.88490	0.86647	0.86796

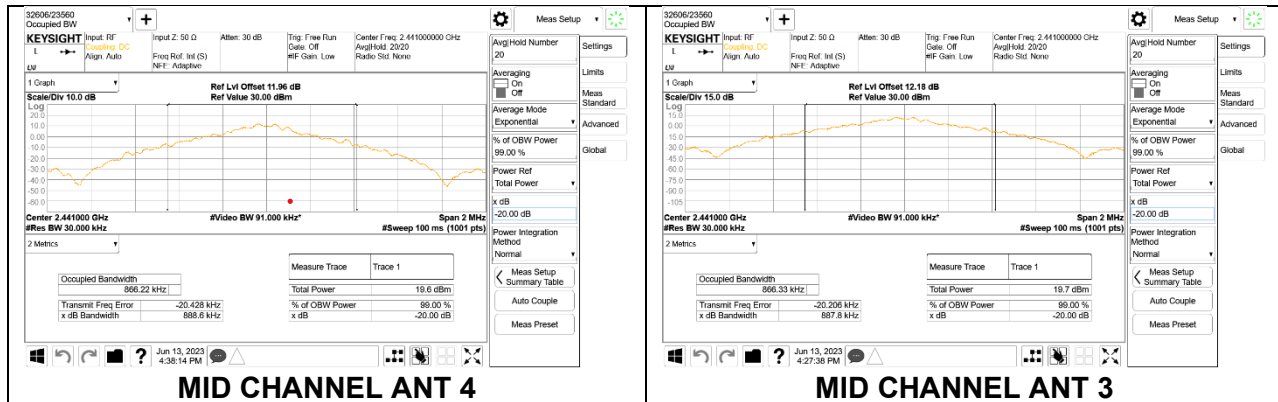




### 9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


**ANT 4**

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.349	1.207
Mid	2441	1.348	1.208
High	2480	1.357	1.216

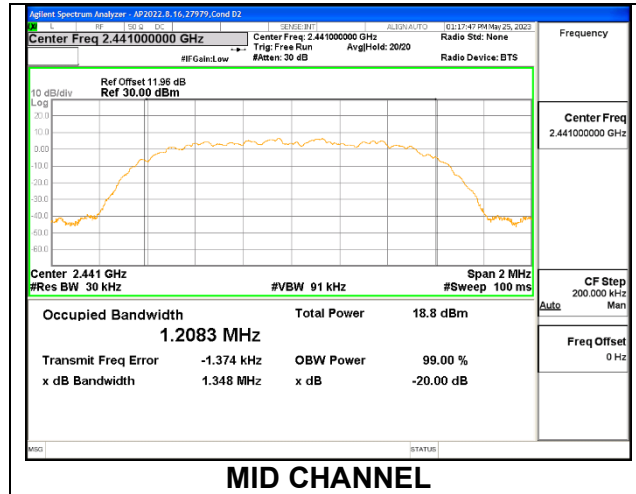



**ANT 3**

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.349	1.208
Mid	2441	1.348	1.209
High	2480	1.347	1.209

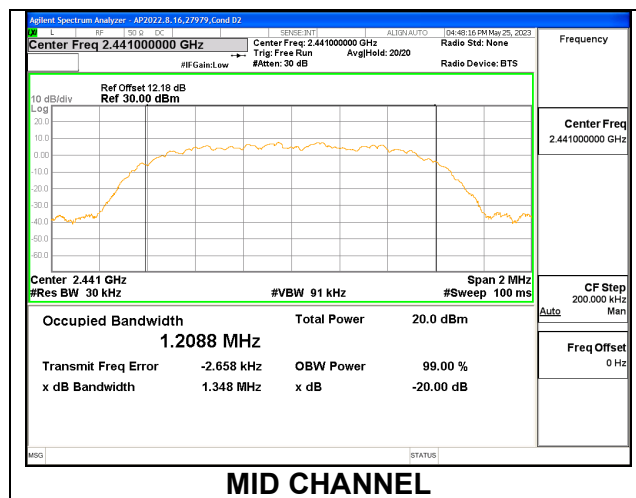

### 9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	1.3660	1.3660	1.2095	1.2112
Mid	2441	1.3590	1.3680	1.2096	1.2102
High	2480	1.3630	1.3660	1.2097	1.2112

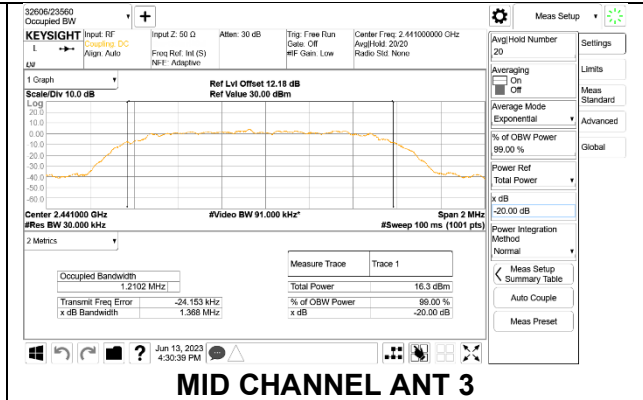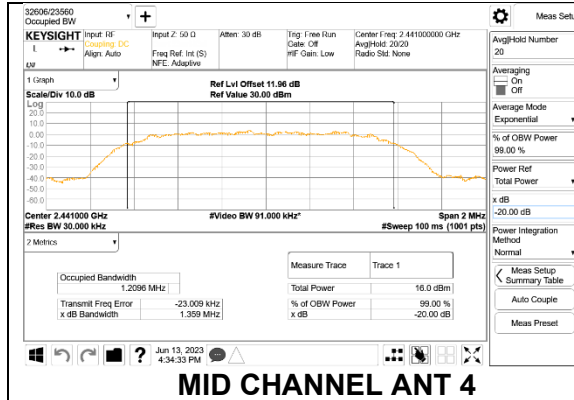

---

### **9.3. HOPPING FREQUENCY SEPARATION**

#### **LIMITS**

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**



The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to  $VBW \geq 3 \times RBW$ . The sweep time is coupled.

#### **RESULTS**

Only High-Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan.

### 9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

#### HOPPING FREQUENCY SEPARATION

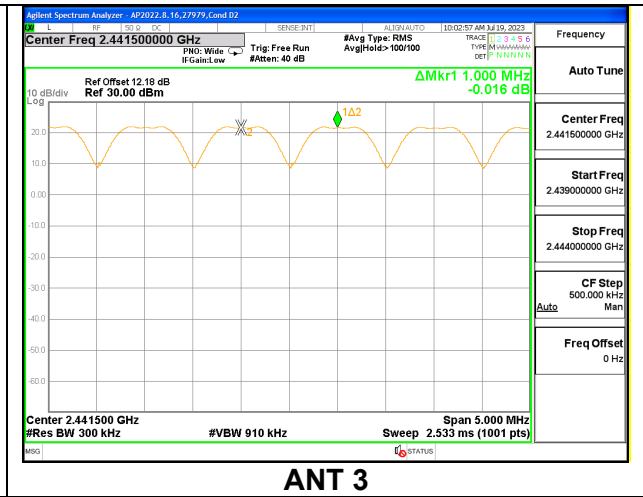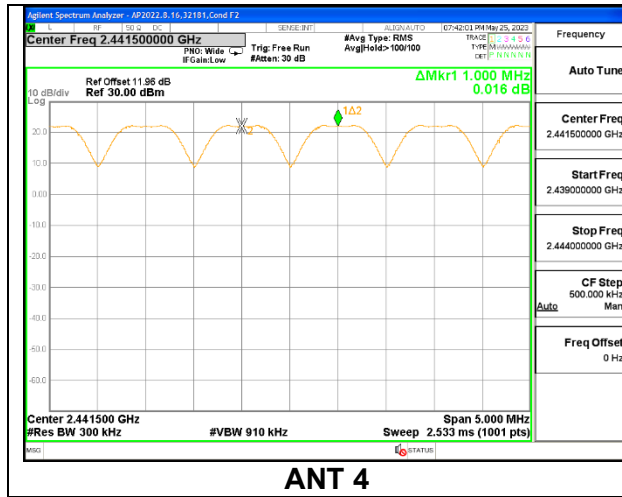

## **9.4. NUMBER OF HOPPING CHANNELS**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

### **RESULTS**


Normal Mode: 79 Channels Observed. Only High-Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan

### 9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


#### ANT 4

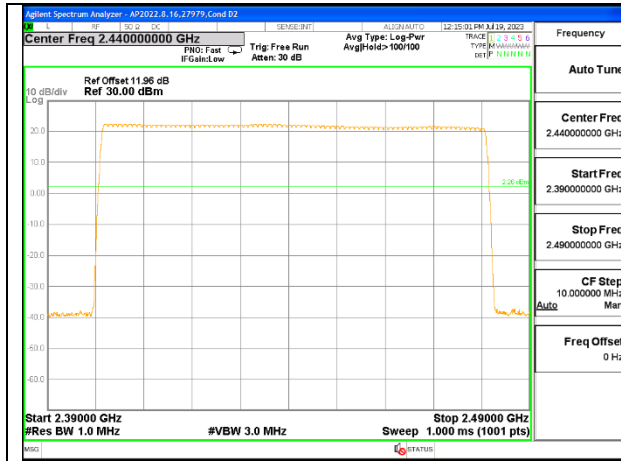


100MHz SPAN

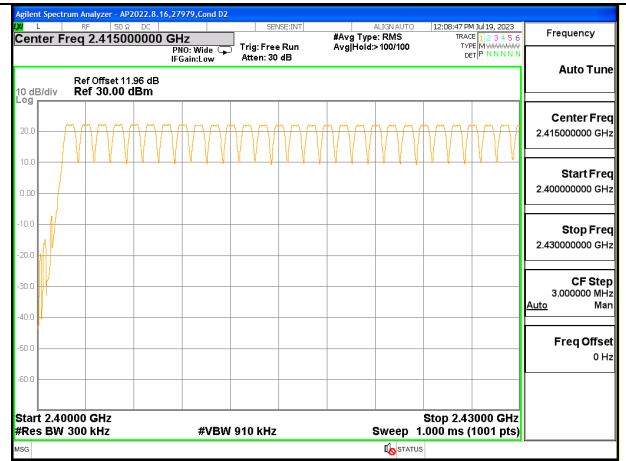

30MHz SPAN, SEGMENT 1 OF 3

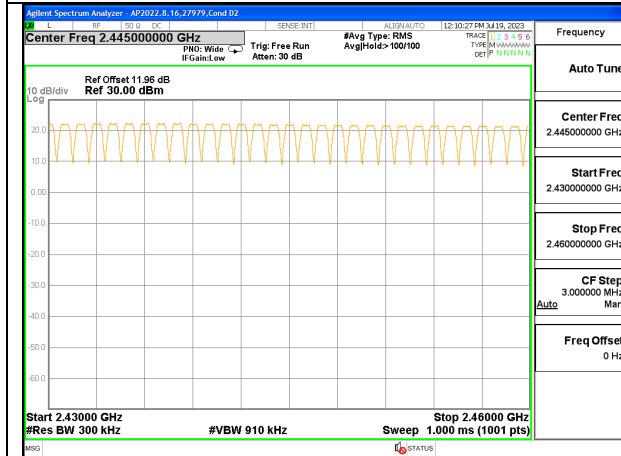


30MHz SPAN, SEGMENT 2 OF 3

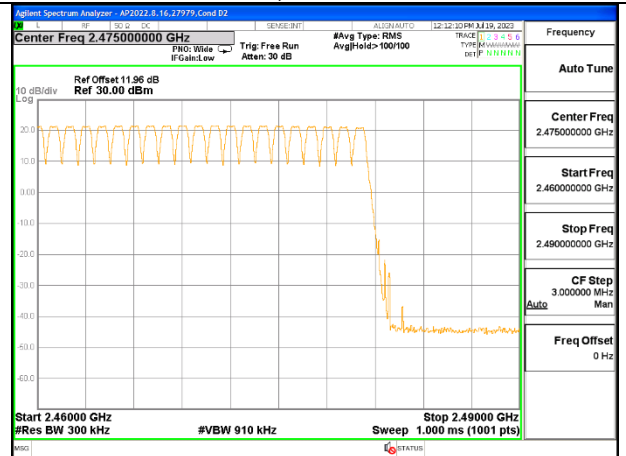


30MHz SPAN, SEGMENT 3 OF 3


**ANT 3**

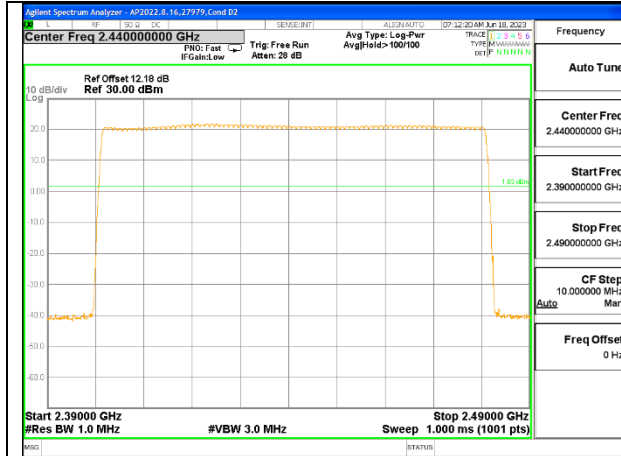


**100MHz SPAN**

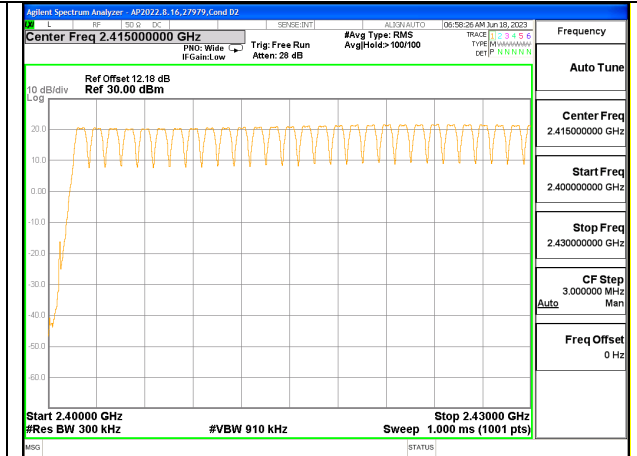

**30MHz SPAN, SEGMENT 1 OF 3**

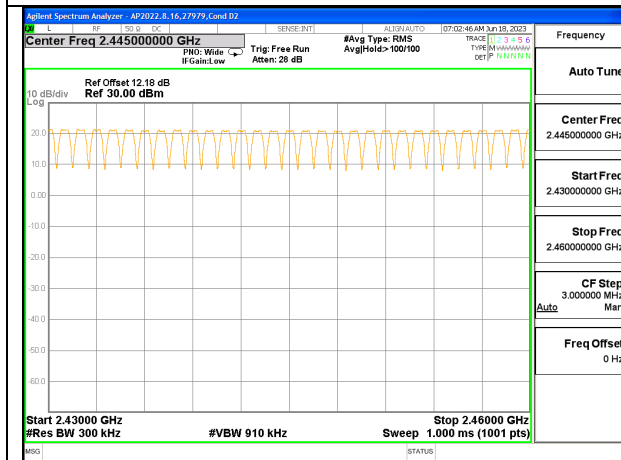

**30MHz SPAN, SEGMENT 2 OF 3**

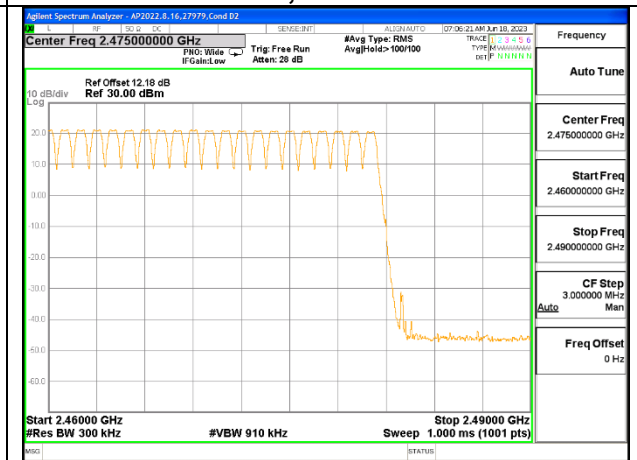

**30MHz SPAN, SEGMENT 3 OF 3**

---

## 9.5. AVERAGE TIME OF OCCUPANCY

### LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

### RESULTS


Only High-Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same timing.




**9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION**

**ANT 4**


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK Normal Mode</b>					
DH1	0.378	32	0.121	0.4	-0.279
DH3	1.630	16	0.261	0.4	-0.139
DH5	2.876	10	0.288	0.4	-0.112
<b>GFSK AFH Mode</b>					
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.378	8	0.030	0.4	-0.370
DH3	1.63	4	0.065	0.4	-0.335
DH5	2.876	2.5	0.072	0.4	-0.328

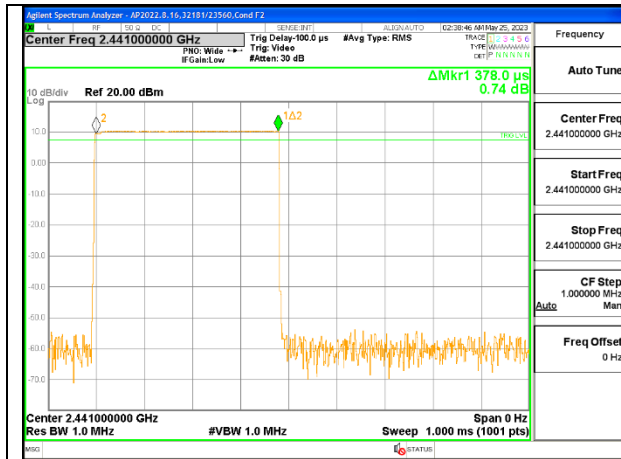

PULSE WIDTH – DH1

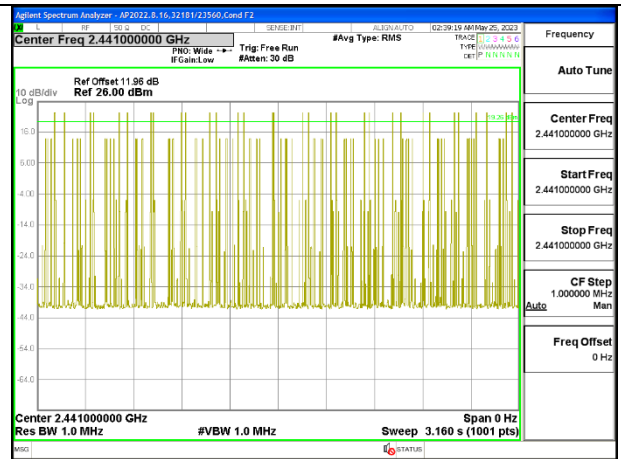


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

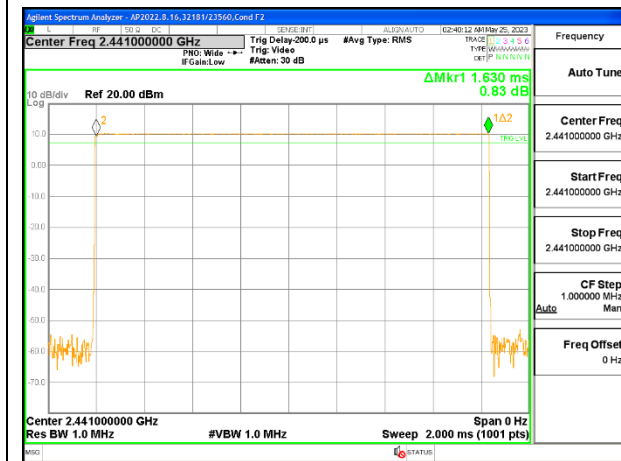


PULSE WIDTH – DH3



NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

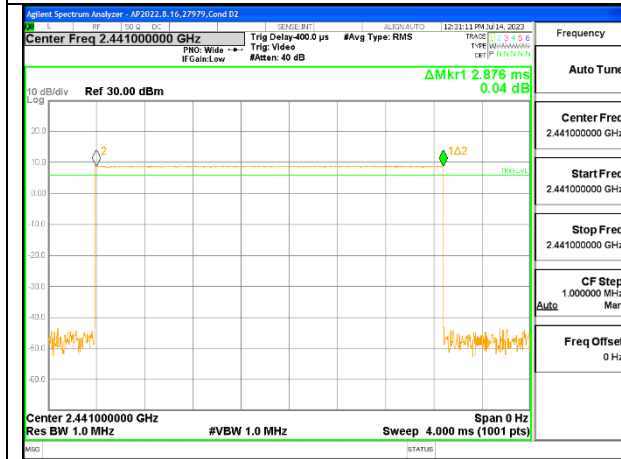


PULSE WIDTH – DH5

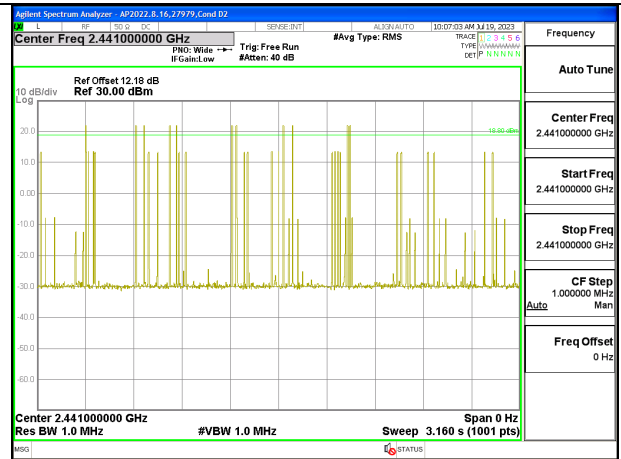


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

**ANT 3**

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK Normal Mode</b>					
DH1	0.377	30	0.113	0.4	-0.287
DH3	1.632	16	0.261	0.4	-0.139
DH5	2.872	9	0.258	0.4	-0.142
<b>GFSK AFH Mode</b>					
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.377	7.5	0.028	0.4	-0.372
DH3	1.632	4	0.065	0.4	-0.335
DH5	2.872	2.25	0.065	0.4	-0.335

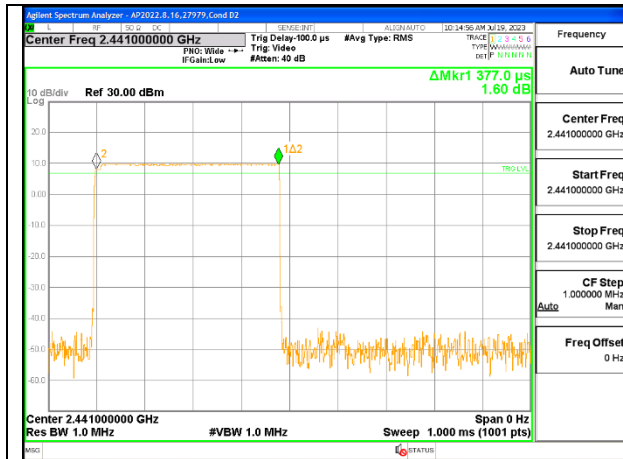


PULSE WIDTH – DH1

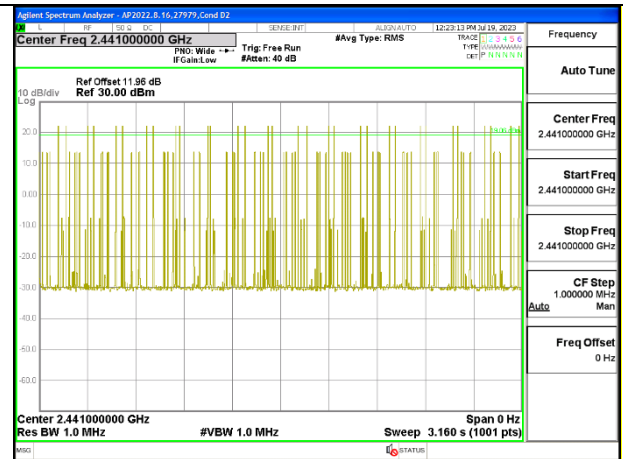


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1




PULSE WIDTH – DH3

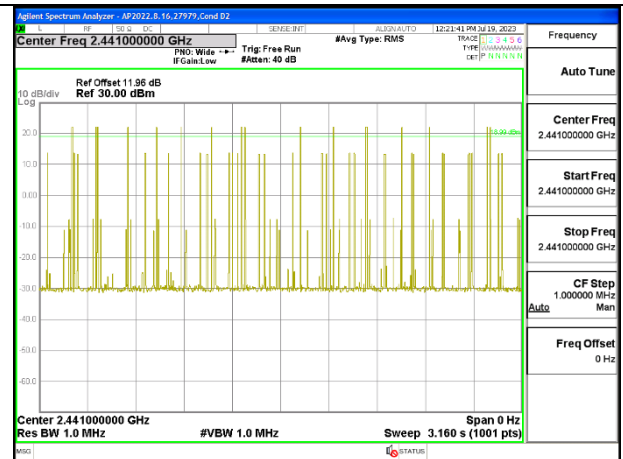

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

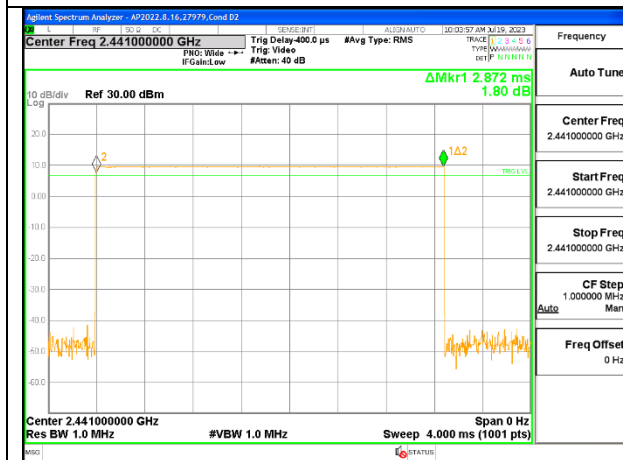

PULSE WIDTH – DH5

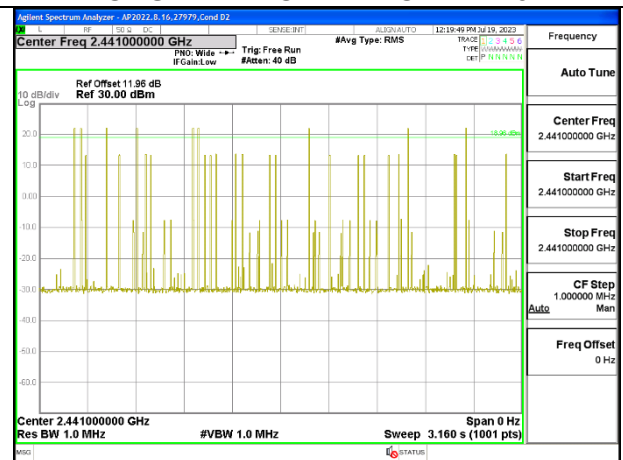

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

## 9.6. OUTPUT POWER

### LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

### TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from the power meter.

### DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power due to the device supporting beamforming. The directional gains are as follows:

Band (GHz)	ANT 4 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	-1.00	-1.90	-1.43	1.57

**DIRECTIONAL GAIN CALCULATION:**

ANSI C63.10-2013 section 14.4.3

Uncorrelated directional gain =  $10 \cdot \text{LOG}((10^{(\text{Ant1}/10)} + 10^{(\text{Ant2}/10)})/2)$ Correlated directional Gain =  $10 \cdot \text{LOG}(((10^{(\text{Ant1}/20)} + 10^{(\text{Ant2}/20)})^2)/2)$ 

Sample Calculation:

Ant4 = -1, Ant3 = -1.90

Uncorrelated Antenna gain =  $10 \log[(10^{(-1/10)} + 10^{(-1.9/10)})/2] = -1.43 \text{ dBi}$ Correlated Antenna gain =  $10 \log[(10^{(-1/20)} + 10^{(-1.9/20)})^2/2] = 1.57 \text{ dBi}$ **RESULTS**

**9.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.19	21	-0.81
Middle	2441	20.26	21	-0.74
High	2480	20.25	21	-0.75

**ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.37	21	-0.63
Middle	2441	20.27	21	-0.73
High	2480	20.42	21	-0.58

**9.6.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.23	17.22	20.24	21	-0.76
Middle	2441	17.21	17.21	20.22	21	-0.78
High	2480	17.21	17.37	20.30	21	-0.70

### 9.6.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

#### ANT 4

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.31	21	-1.69
Middle	2441	19.27	21	-1.73
High	2480	19.27	21	-1.73

#### ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.15	21	-1.85
Middle	2441	19.22	21	-1.78
High	2480	19.15	21	-1.85

### 9.6.4. HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION

#### ANT 4 + ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	16.22	16.33	19.29	21	-1.71
Middle	2441	16.35	16.32	19.35	21	-1.65
High	2480	16.30	16.18	19.25	21	-1.75



### 9.6.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

#### ANT 4

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.46	21	-1.54
Middle	2441	19.51	21	-1.49
High	2480	19.40	21	-1.6

#### ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.32	21	-1.68
Middle	2441	19.35	21	-1.65
High	2480	19.33	21	-1.67

### 9.6.6. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

#### ANT 4 + ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	16.48	16.35	19.43	21	-1.57
Middle	2441	16.36	16.45	19.42	21	-1.58
High	2480	16.42	16.15	19.30	21	-1.70

**9.6.7. LOW POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.70	21	-9.3
Middle	2441	11.61	21	-9.39
High	2480	11.67	21	-9.33

**ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.77	21	-9.23
Middle	2441	11.85	21	-9.15
High	2480	11.75	21	-9.25

**9.6.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.7	11.52	14.62	21	-6.38
Middle	2441	11.58	11.50	14.55	21	-6.45
High	2480	11.62	11.65	14.65	21	-6.35

### 9.6.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION

#### ANT 4

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.30	21	-9.7
Middle	2441	11.25	21	-9.75
High	2480	11.35	21	-9.65

#### ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.50	21	-9.5
Middle	2441	11.49	21	-9.51
High	2480	11.33	21	-9.67

### 9.6.10. LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION

#### ANT 4 + ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.30	11.32	14.32	21	-6.68
Middle	2441	11.32	11.28	14.31	21	-6.69
High	2480	11.30	11.26	14.29	21	-6.71

### 9.6.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

#### ANT 4

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.31	21	-9.69
Middle	2441	11.50	21	-9.5
High	2480	11.55	21	-9.45

#### ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.50	21	-9.5
Middle	2441	11.52	21	-9.48
High	2480	11.35	21	-9.65

### 9.6.12. LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

#### ANT 4 + ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.4	11.42	14.42	21	-6.58
Middle	2441	11.36	11.40	14.39	21	-6.61
High	2480	11.35	11.30	14.34	21	-6.66

## **9.7. AVERAGE POWER**

### **LIMITS**

None; for reporting purposes only

### **TEST PROCEDURE**

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

### **RESULTS**

**9.7.1. HIGH POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.76
Middle	2441	19.96
High	2480	19.85

**ANT 3**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.95
Middle	2441	19.89
High	2480	19.98

**9.7.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	16.83	16.99	19.92
Middle	2441	16.99	16.98	20.00
High	2480	16.98	16.92	19.96

### 9.7.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

#### ANT 4

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.47
Middle	2441	16.44
High	2480	16.45

#### ANT 3

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.36
Middle	2441	16.40
High	2480	16.35

### 9.7.4. HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION

#### ANT 4 + ANT 3

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	13.26	13.36	16.32
Middle	2441	13.40	13.36	16.39
High	2480	13.35	13.26	16.32

### 9.7.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

**ANT 4**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.42
Middle	2441	16.46
High	2480	16.36

**ANT 3**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.40
Middle	2441	16.45
High	2480	16.42

### 9.7.6. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

**ANT 4 + ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	13.44	13.37	16.42
Middle	2441	13.37	13.46	16.43
High	2480	13.45	13.24	16.36



**9.7.7. LOW POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.40
Middle	2441	11.28
High	2480	11.33

**ANT 3**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.42
Middle	2441	11.49
High	2480	11.40

**9.7.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	11.47	11.21	14.35
Middle	2441	11.34	11.22	14.29
High	2480	11.37	11.4	14.40

**9.7.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION**

**ANT 4**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.34
Middle	2441	8.27
High	2480	8.39

**ANT 3**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.40
Middle	2441	8.39
High	2480	8.26

**9.7.10. LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION**

**ANT 4 + ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	8.40	8.40	11.41
Middle	2441	8.42	8.35	11.40
High	2480	8.40	8.34	11.38

**9.7.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION**

**ANT 4**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.40
Middle	2441	8.35
High	2480	8.45

**ANT 3**

Tested By:	44366
Date	6/8/2023

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.44
Middle	2441	8.45
High	2480	8.30

**9.7.12. LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION**

**ANT 4 + ANT 3**

Tested By:	44366
Date:	6/8/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	8.48	8.48	11.49
Middle	2441	8.44	8.48	11.47
High	2480	8.43	8.36	11.41

## 9.8. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


**Note:** Test procedure on Beamforming mode is same as BT BDR and EDR mode

### RESULTS


Note: Frequency hopping due to software command not able to power tune the setting.

## 9.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


### ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

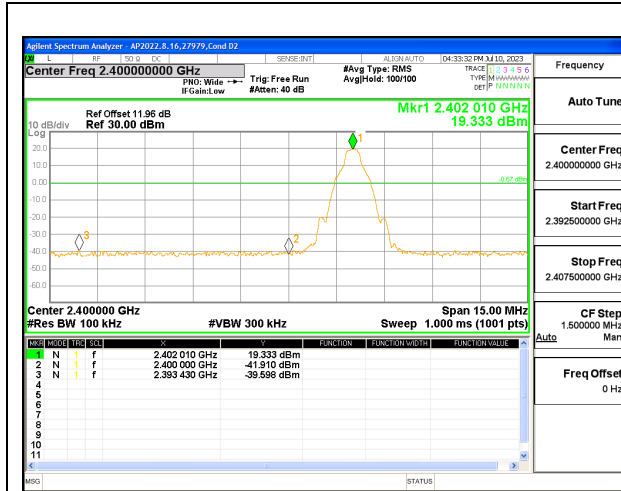


LOW CHANNEL BANDEDGE

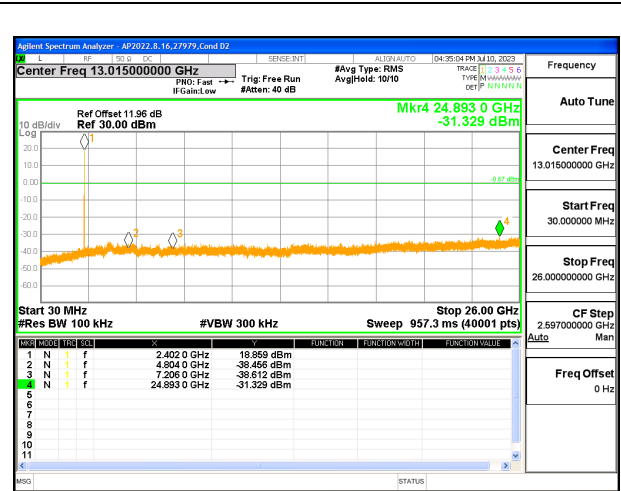


OUT-OF-BAND LOW CHANNEL

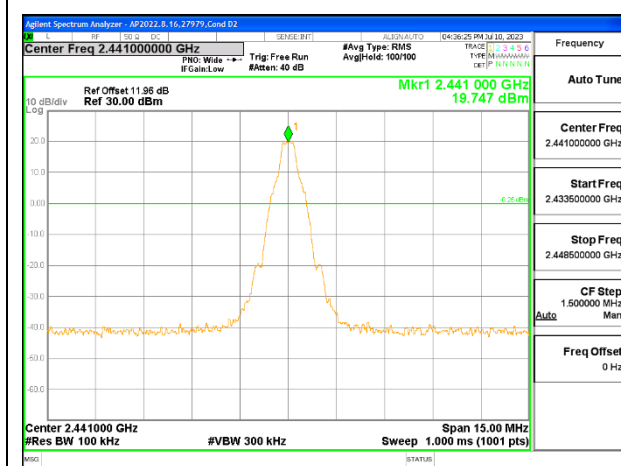


IN-BAND REFERENCE LEVEL

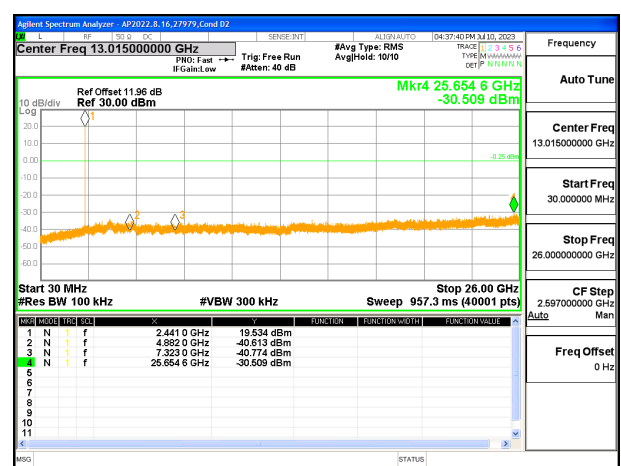

OUT-OF-BAND MID CHANNEL

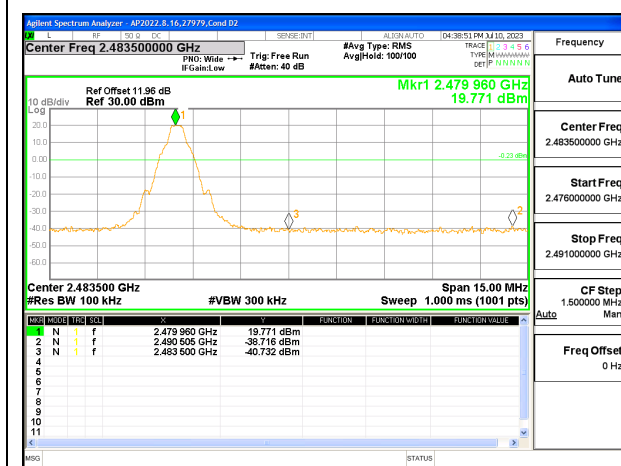


HIGH CHANNEL BANDEDGE

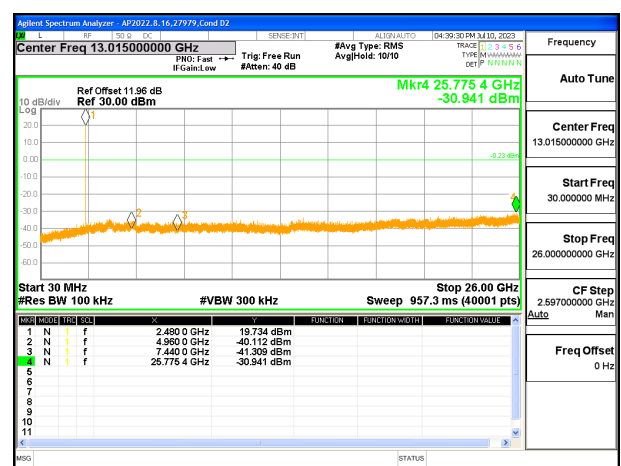


OUT-OF-BAND HIGH CHANNEL


**ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

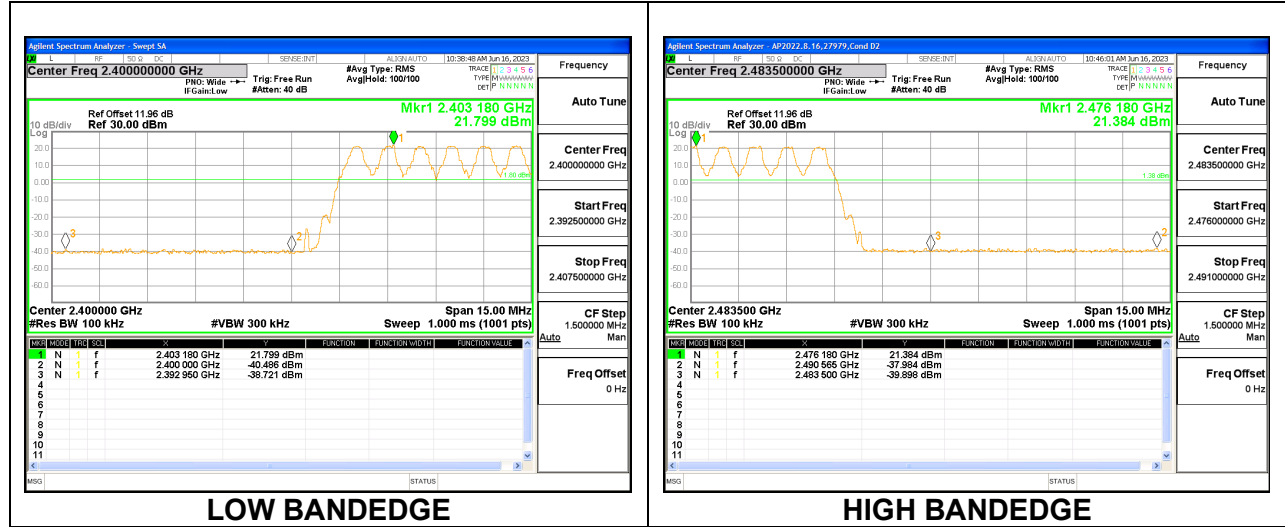


**ANT 3 SPURIOUS EMISSIONS, NON-HOPPING**

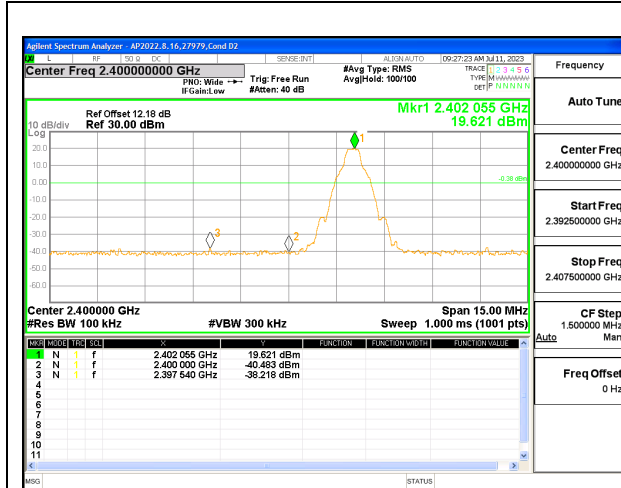


**LOW CHANNEL BANDEDGE**

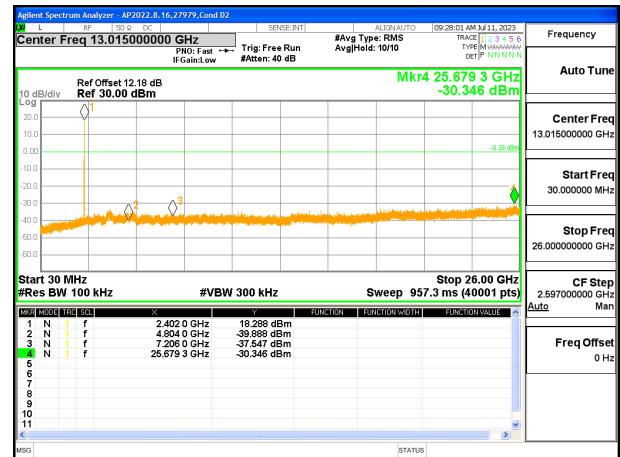


**OUT-OF-BAND LOW CHANNEL**

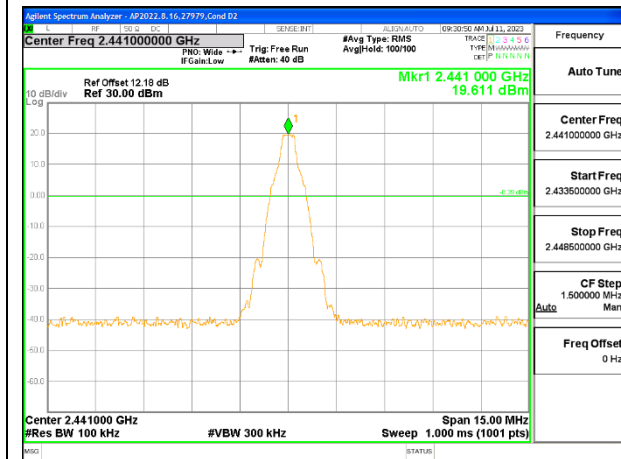


**IN-BAND REFERENCE LEVEL**

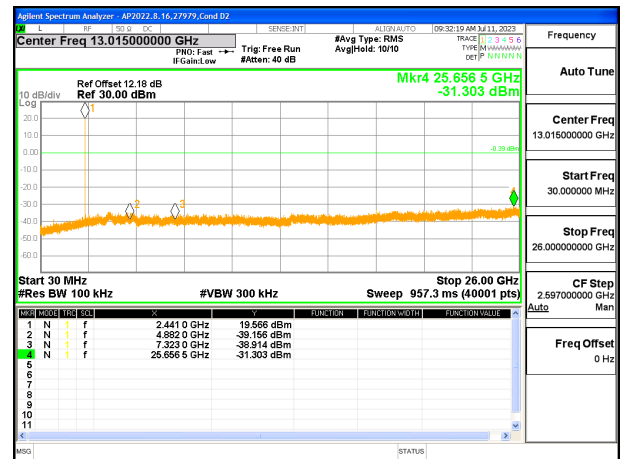

**OUT-OF-BAND MID CHANNEL**


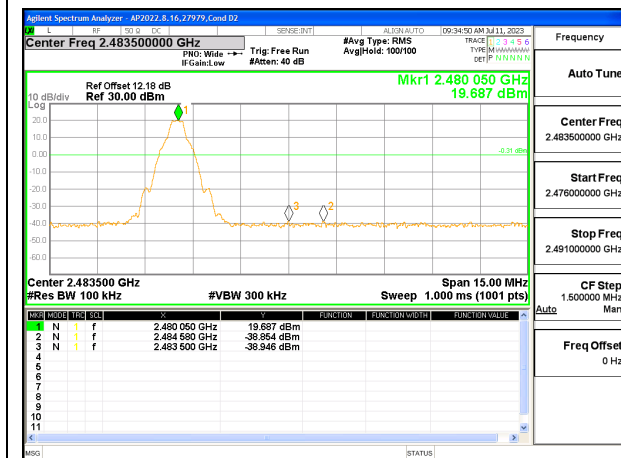


**HIGH CHANNEL BANDEDGE**

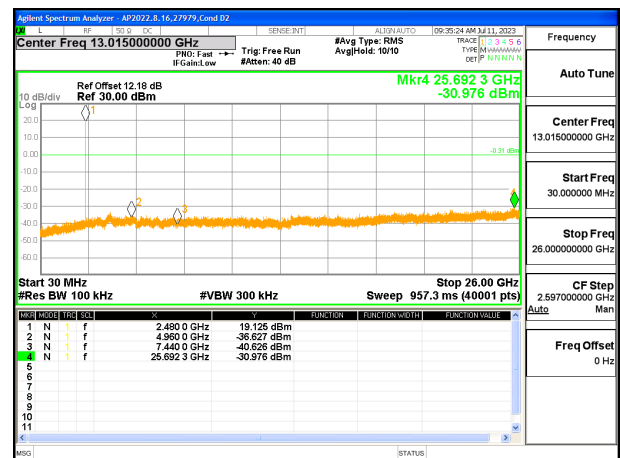

**OUT-OF-BAND HIGH CHANNEL**

**ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

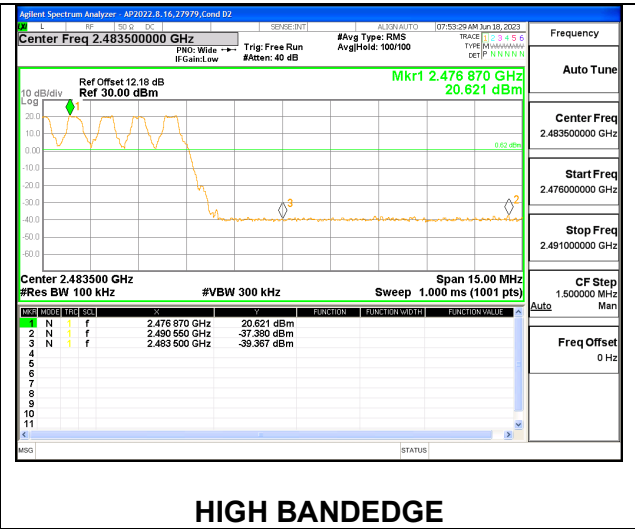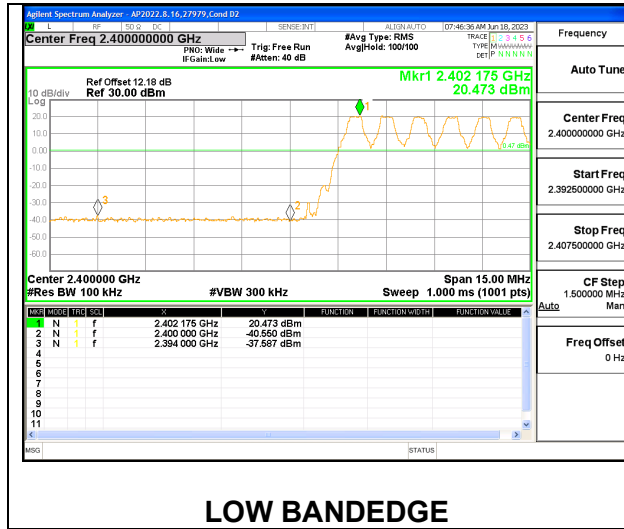





## 9.8.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

**Note:** Test procedure on beamforming mode is same as BT basic and EDR mode


### ANT 4

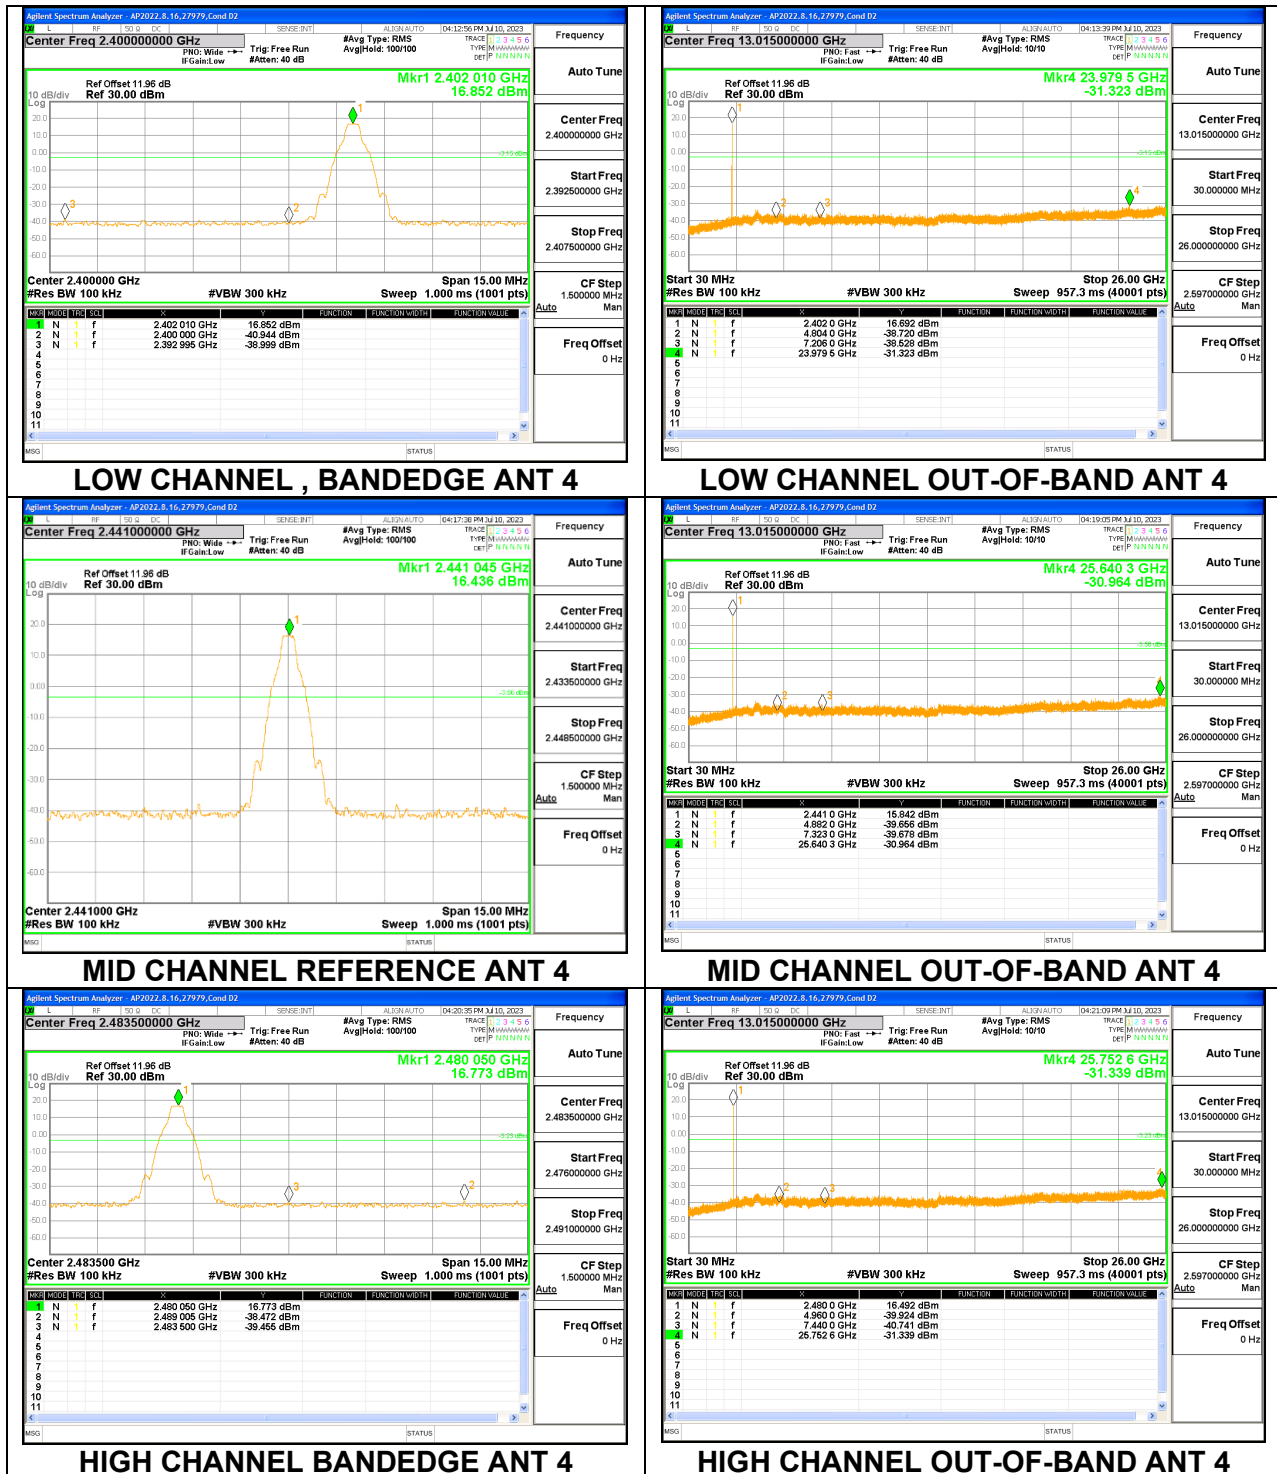

**ANT 4 SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON**

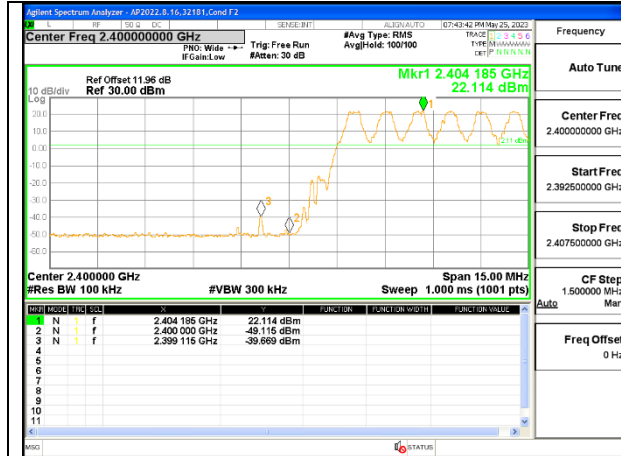


**LOW BANDEGE**

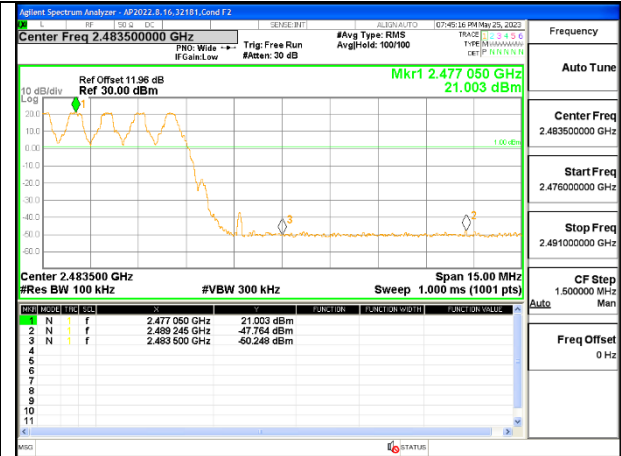


**HIGH BANDEGE**


ANT 3

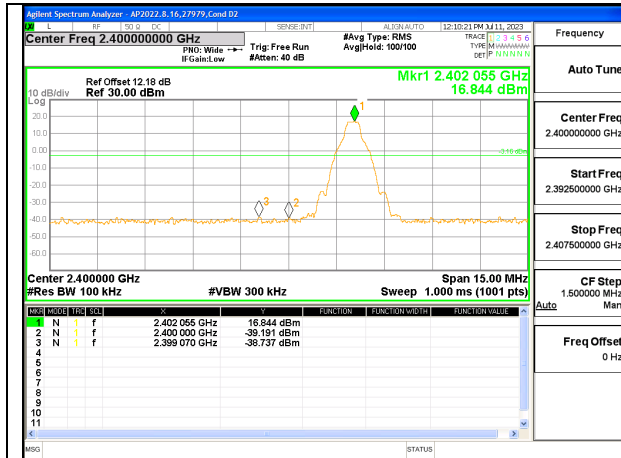


LOW CHANNEL , BANDEDGE ANT 3

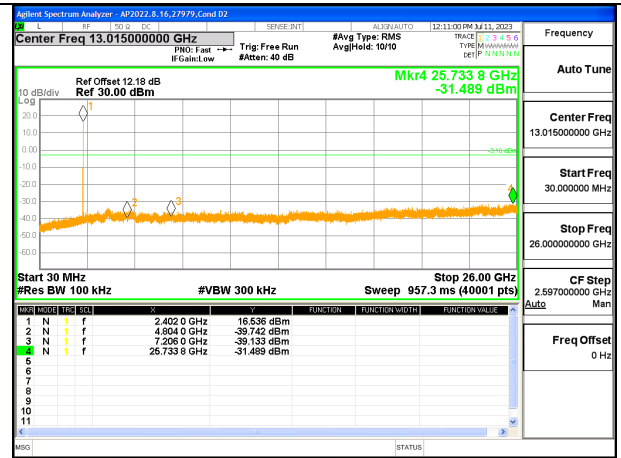


LOW CHANNEL OUT-OF-BAND ANT 3

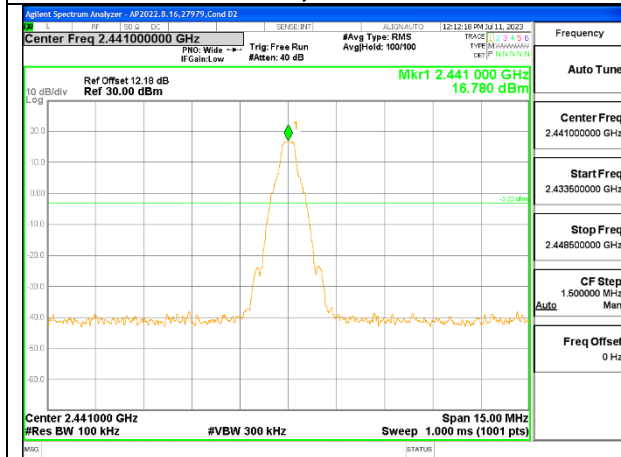


MID CHANNEL REFERENCE ANT 3

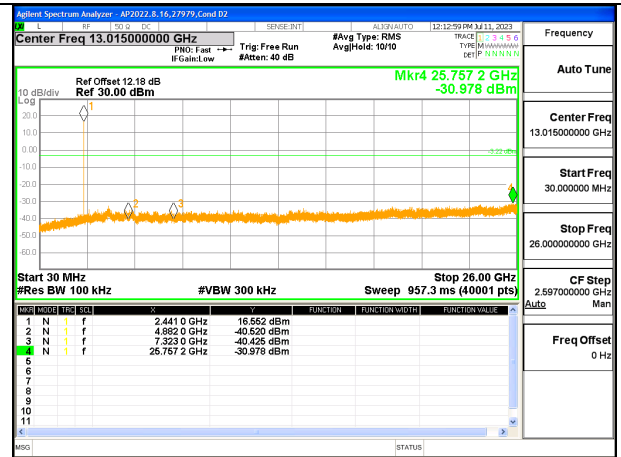

MID CHANNEL OUT-OF-BAND ANT 3


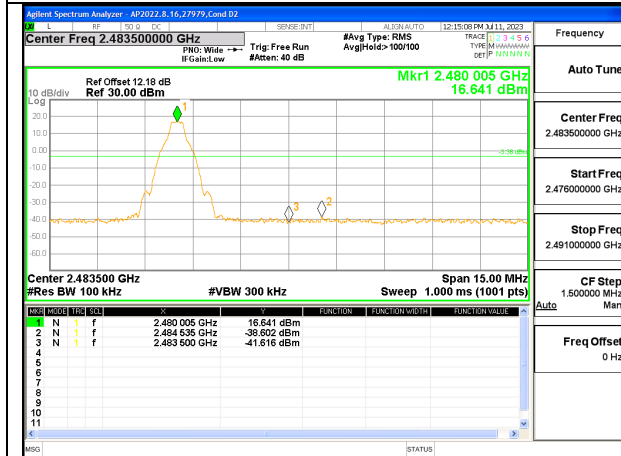


HIGH CHANNEL BANDEDGE ANT 3

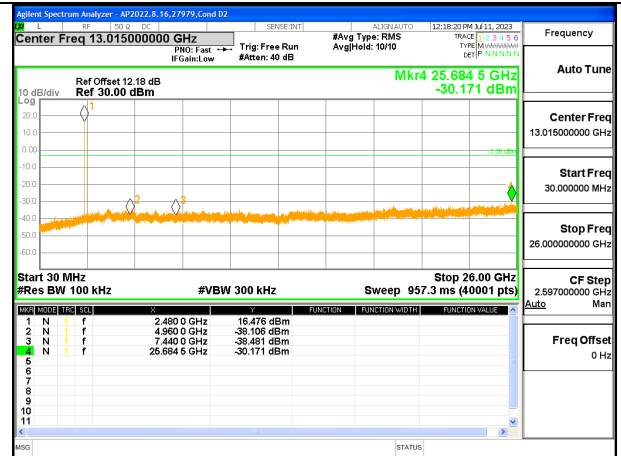


HIGH CHANNEL OUT-OF-BAND ANT 3

**ANT 3 SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON**

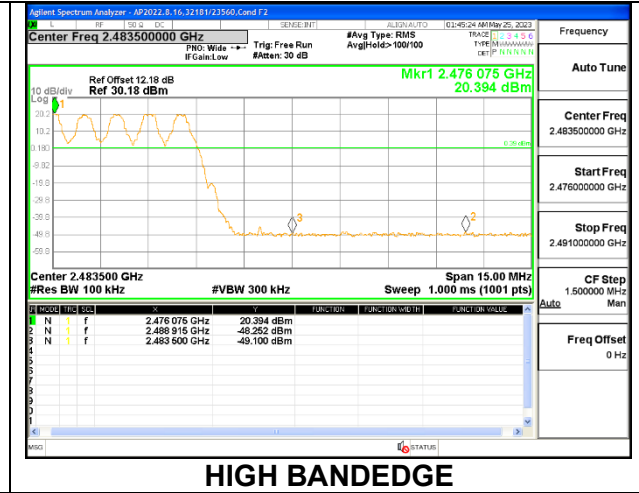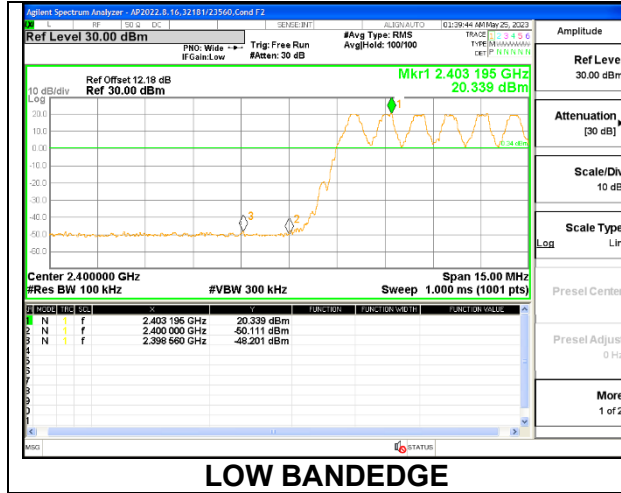


### 9.8.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


#### ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

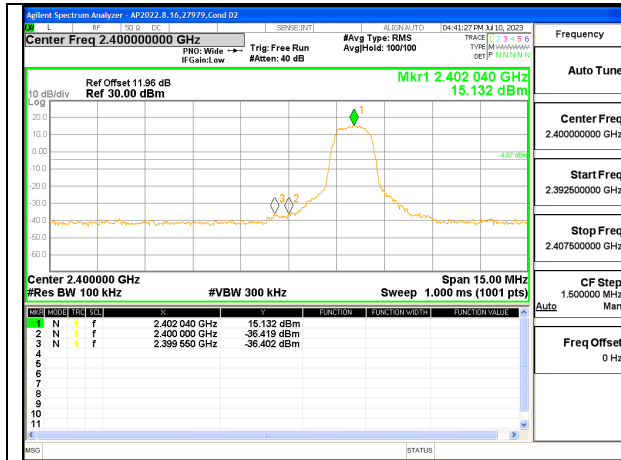


**LOW CHANNEL BANDEDGE**

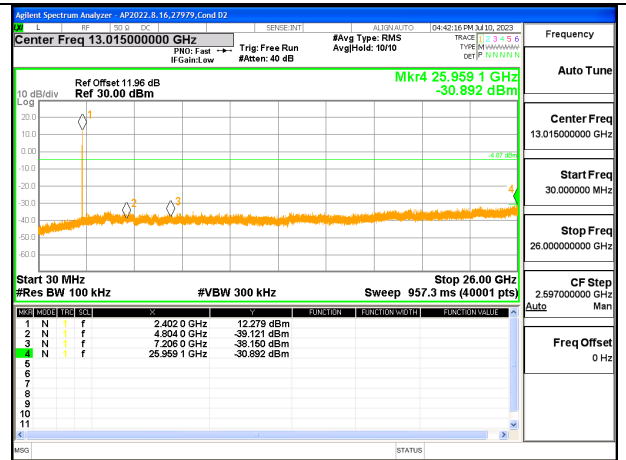


**OUT-OF-BAND LOW CHANNEL**

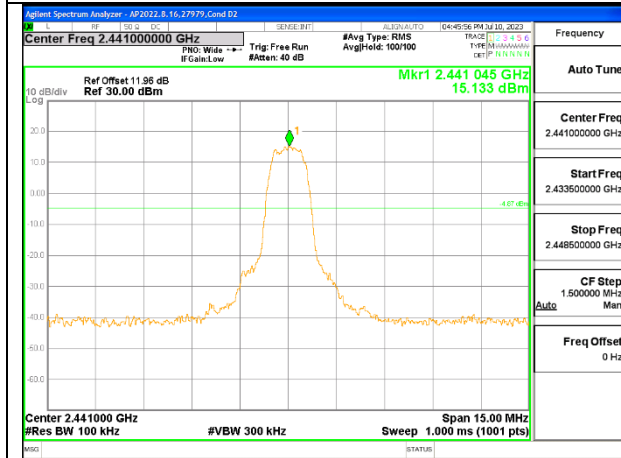


**IN-BAND REFERENCE LEVEL**

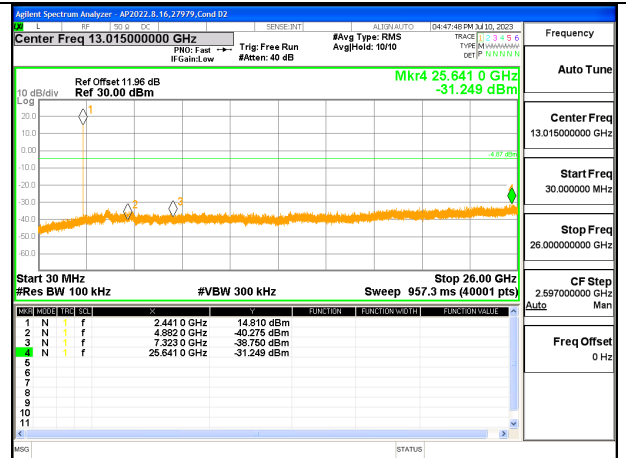

**OUT-OF-BAND MID CHANNEL**

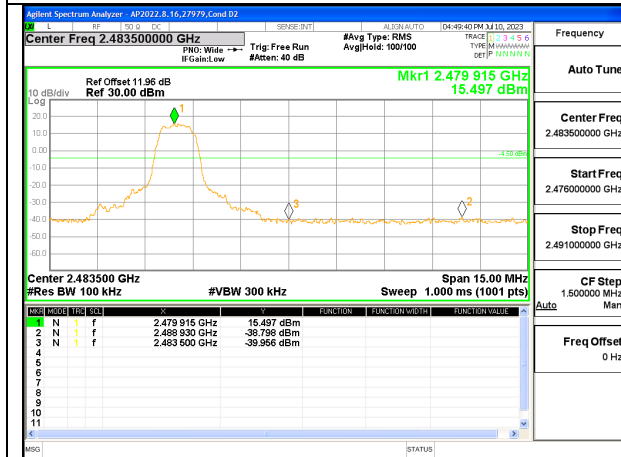


**HIGH CHANNEL BANDEDGE**

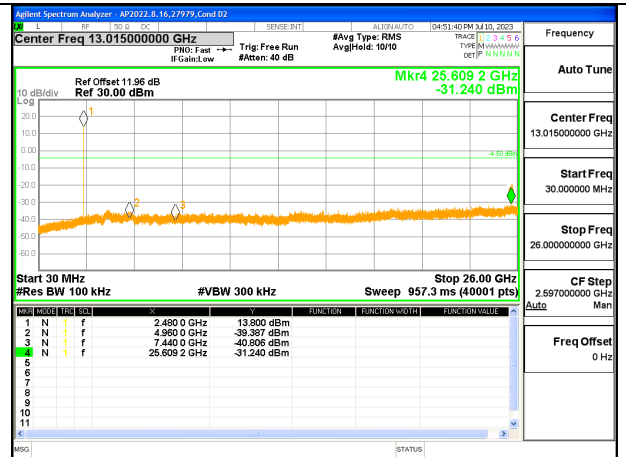


**OUT-OF-BAND HIGH CHANNEL**


**ANT 4 SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON**

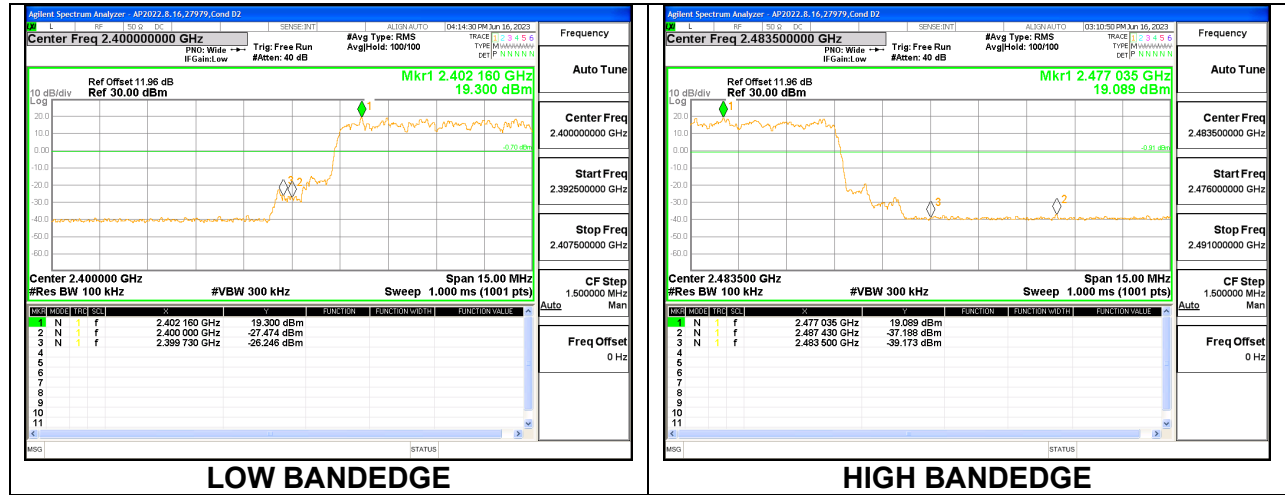


**ANT 3 SPURIOUS EMISSIONS, NON-HOPPING**

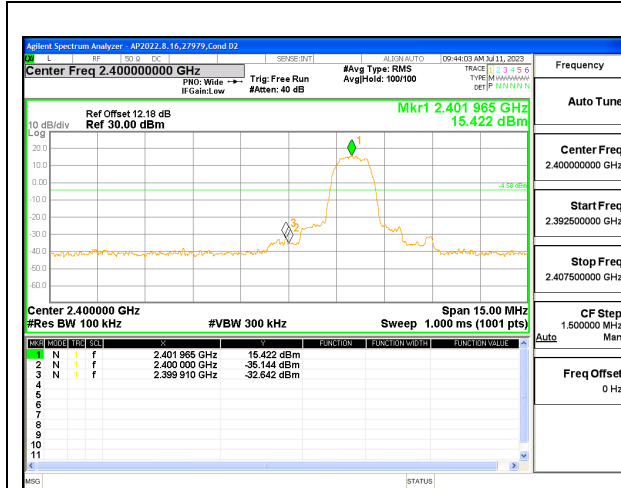


**LOW CHANNEL BANDEDGE**

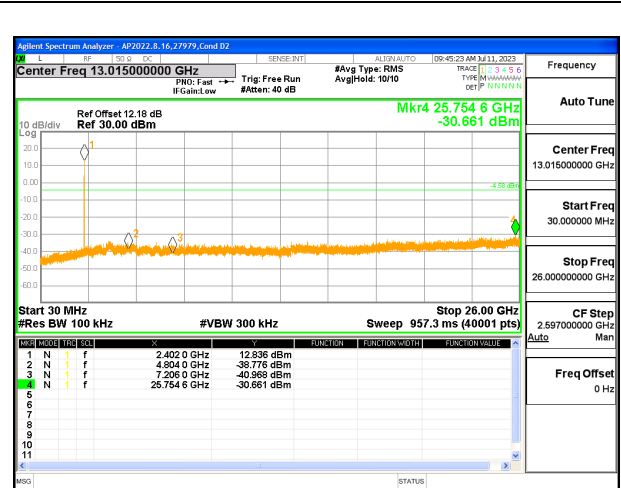


**OUT-OF-BAND LOW CHANNEL**

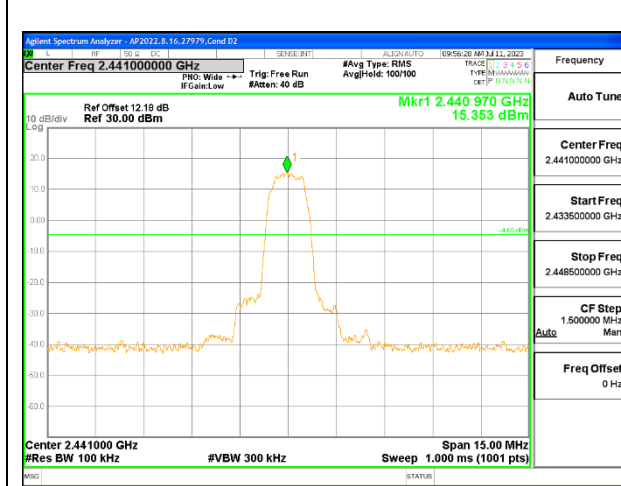


**IN-BAND REFERENCE LEVEL**

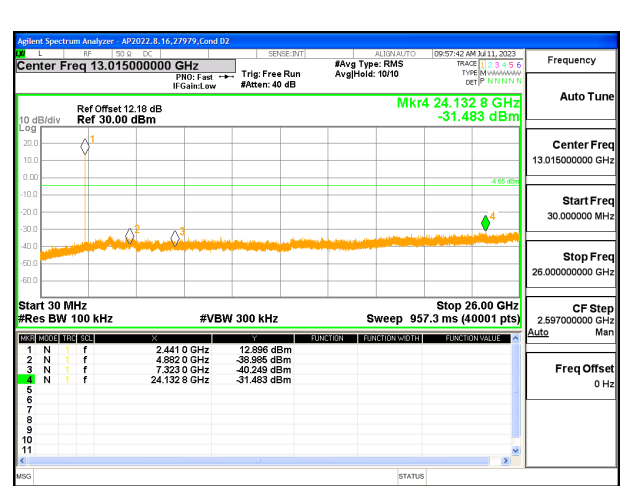

**OUT-OF-BAND MID CHANNEL**

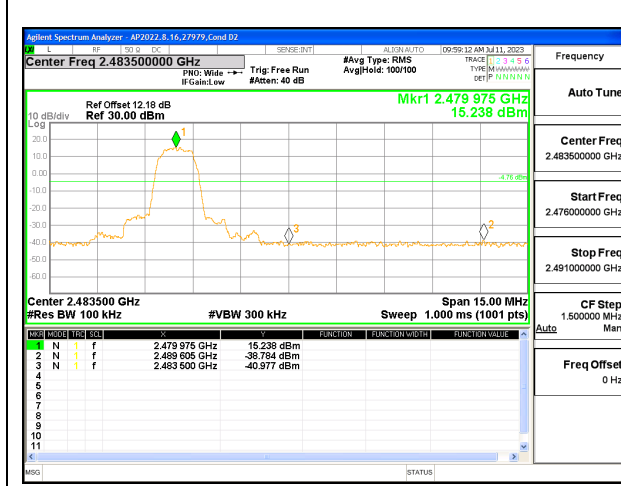


**HIGH CHANNEL BANDEDGE**

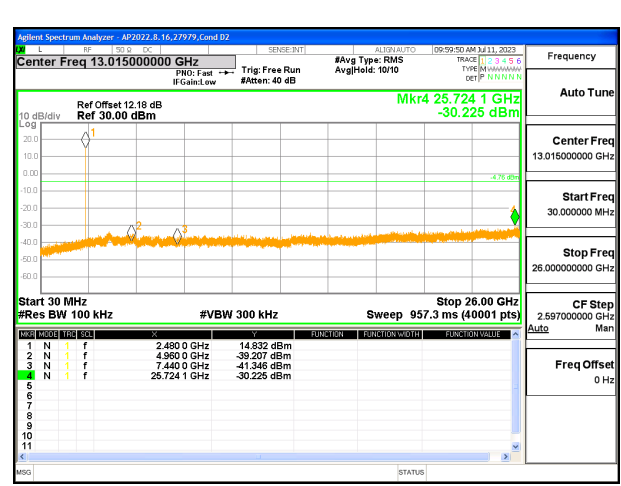

**OUT-OF-BAND HIGH CHANNEL**

**ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

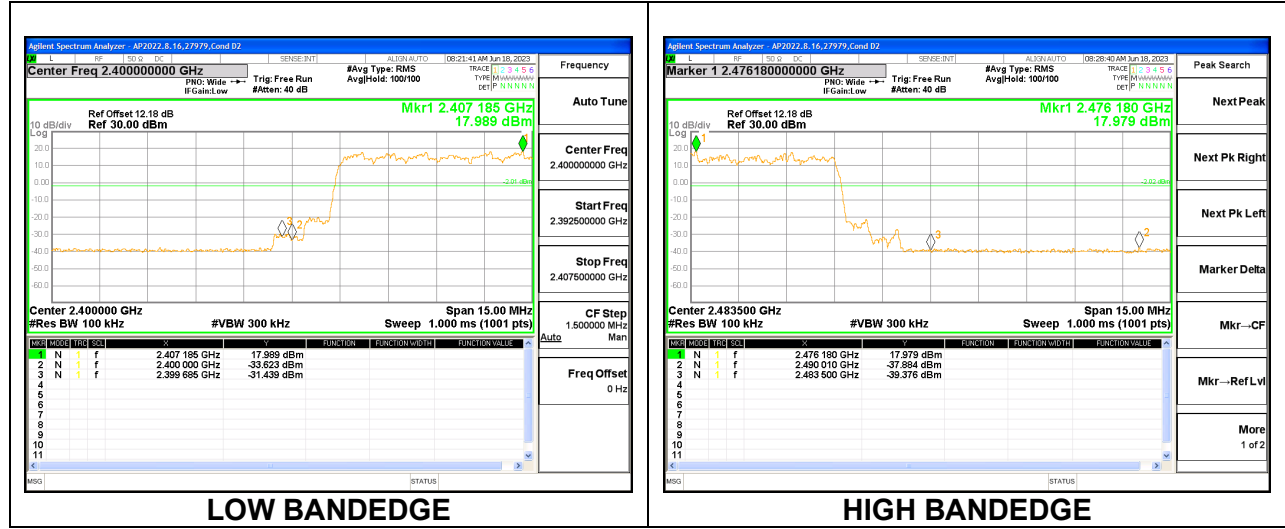





### 9.8.4. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION

**Note:** Test procedure on beamforming mode is same as BT basic and EDR mode


#### ANT 4

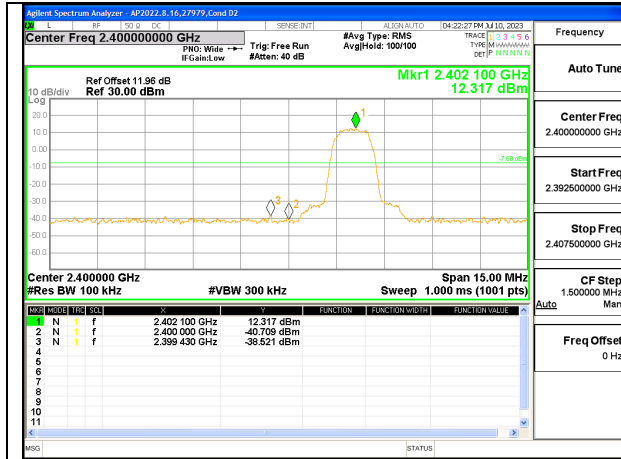


**LOW CHANNEL , BANDEDGE ANT 4**

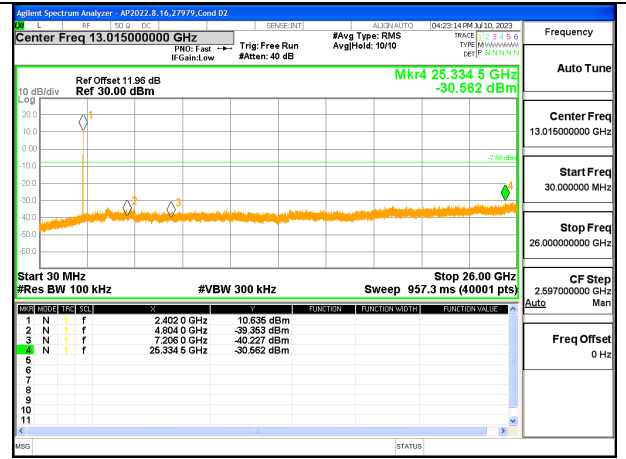


**LOW CHANNEL OUT-OF-BAND ANT 4**

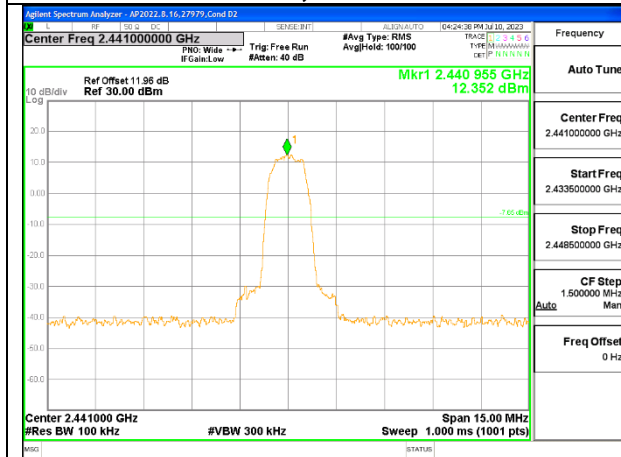


**MID CHANNEL REFERENCE ANT 4**

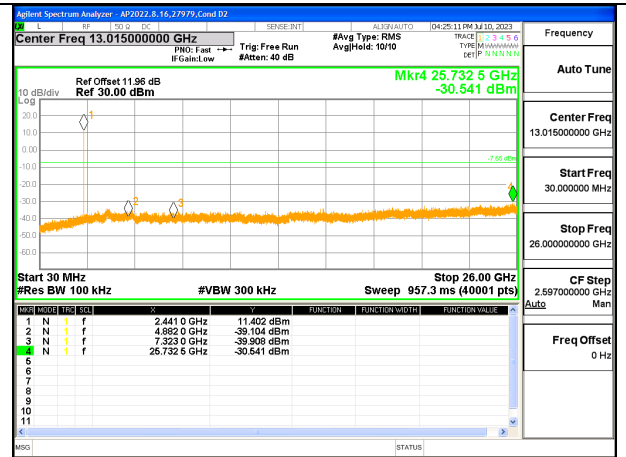

**MID CHANNEL OUT-OF-BAND ANT 4**

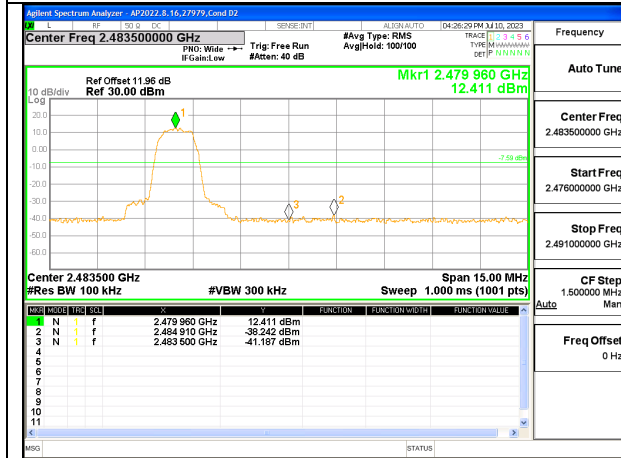


**HIGH CHANNEL BANDEDGE ANT 4**

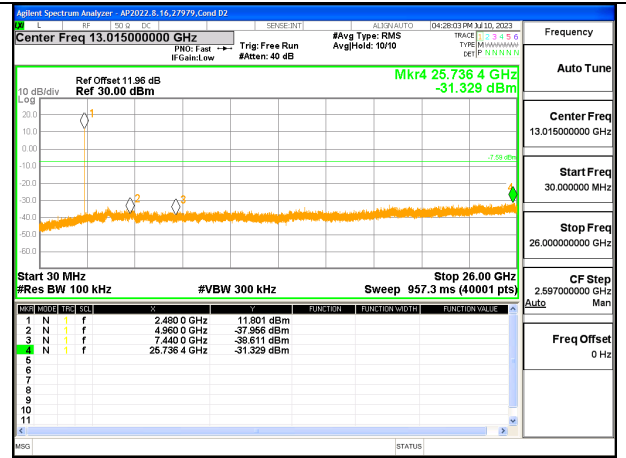


**HIGH CHANNEL OUT-OF-BAND ANT 4**


**ANT 4 SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON**

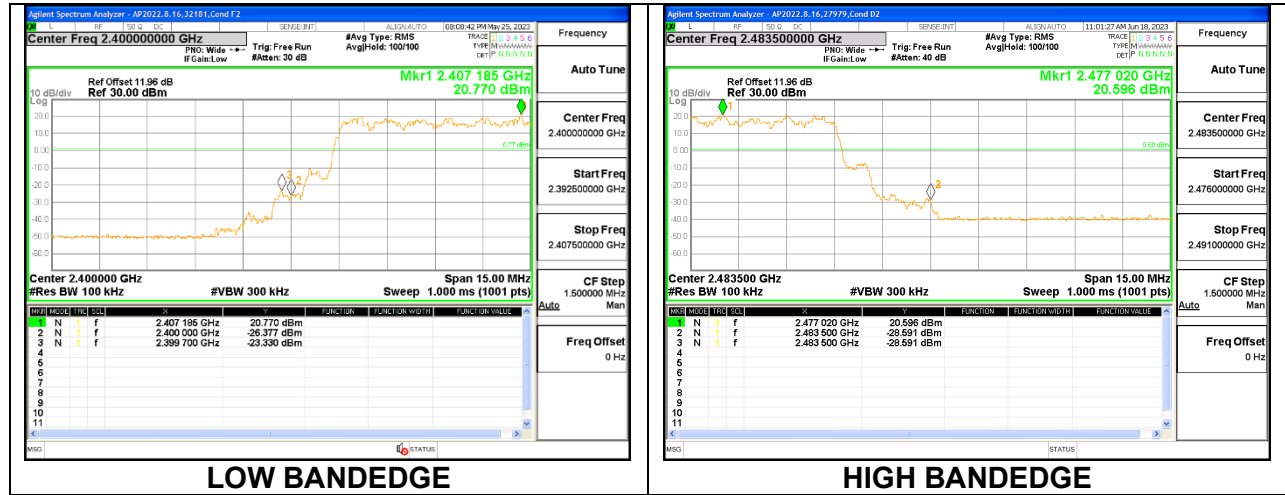


ANT 3

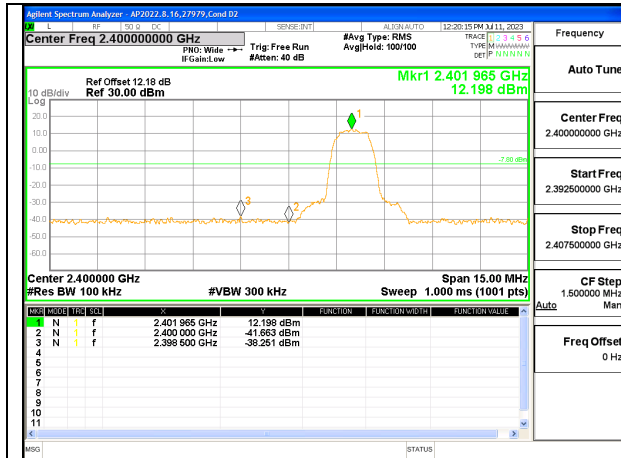


LOW CHANNEL , BANDEDGE ANT 3

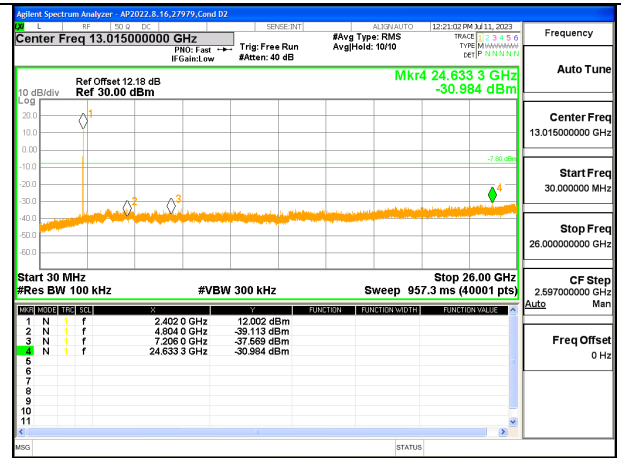


LOW CHANNEL OUT-OF-BAND ANT 3

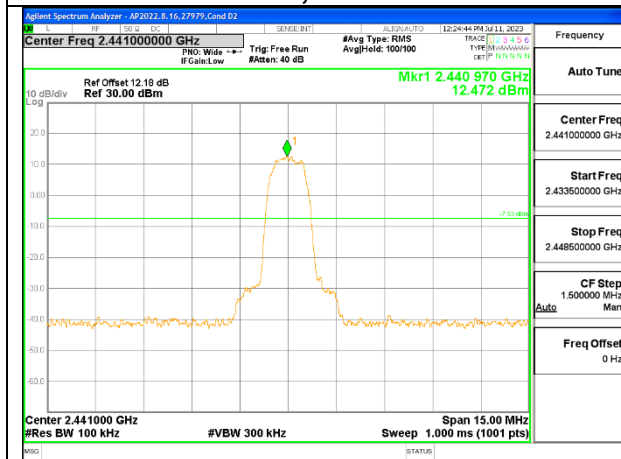


MID CHANNEL REFERENCE ANT 3

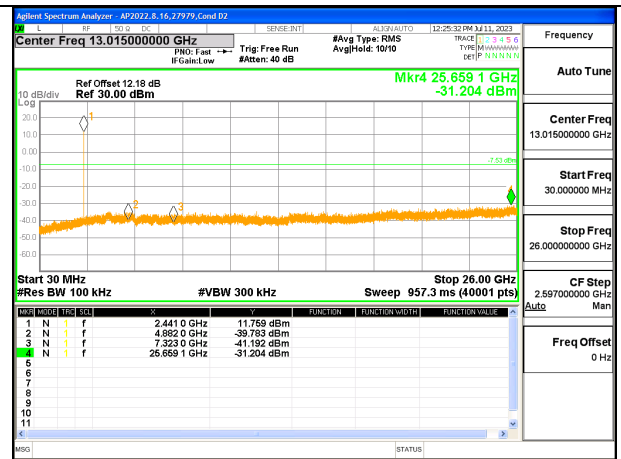

MID CHANNEL OUT-OF-BAND ANT 3

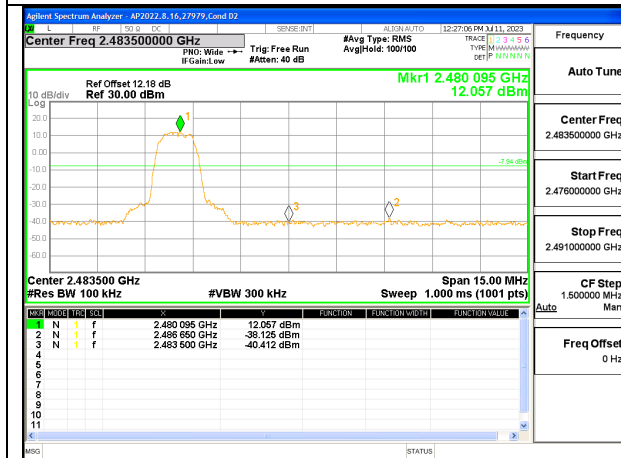

HIGH CHANNEL BANDEDGE ANT 3

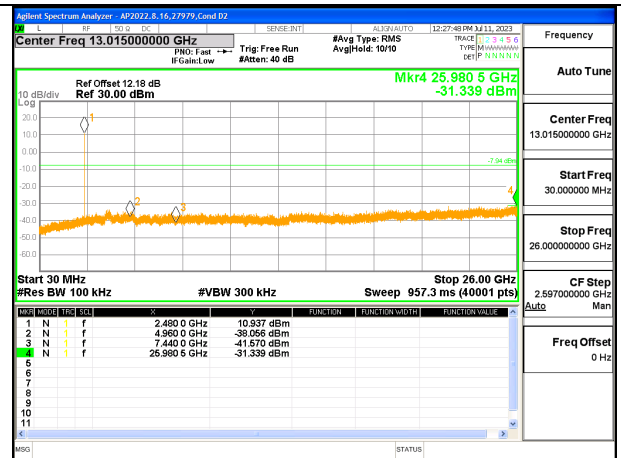

HIGH CHANNEL OUT-OF-BAND ANT 3