
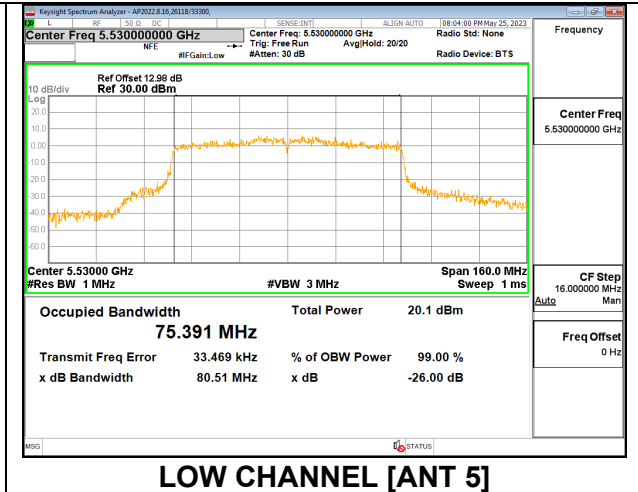


2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	81.57	80.51	75.5050	75.3910
High	5610	84.36	83.38	75.5460	75.4690
138	5690	80.51	79.93	75.5410	75.4900

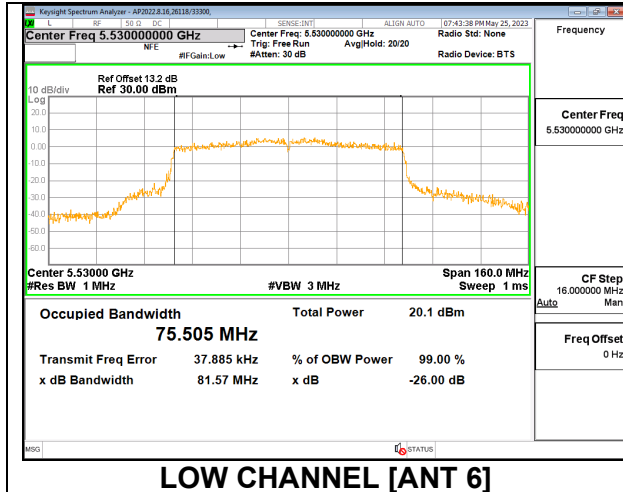

9.2.16. 802.11ax HE20 MODE IN THE 5.6 GHz BAND


1TX Antenna 6 MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	19.29	18.1170
Mid	5580	19.25	18.2090
High	5700	19.43	18.1760
144	5720	19.38	18.1950

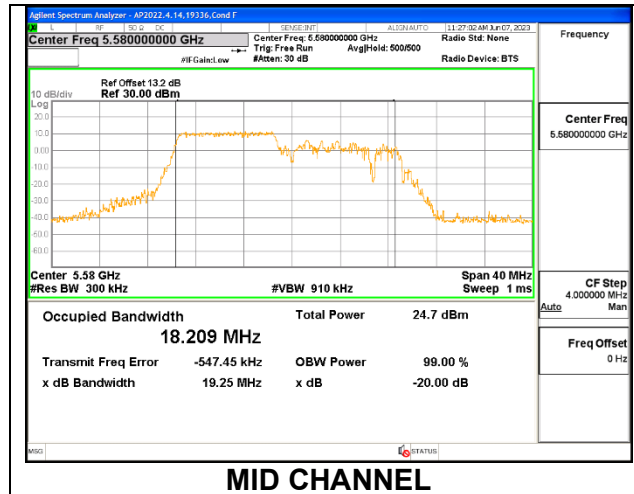


1TX Antenna 6 MODE: 106 Tones, RU Index 54

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	20.06	18.2630
Mid	5580	20.03	18.2570
High	5700	20.19	18.4010
144	5720	19.79	18.2810

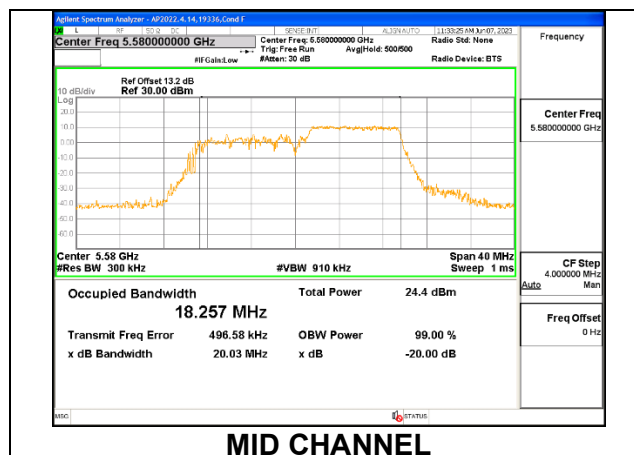


1TX Antenna 6 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	21.20	18.8740
Mid	5580	20.50	18.9500
High	5700	20.61	18.9410
144	5720	21.16	18.8780

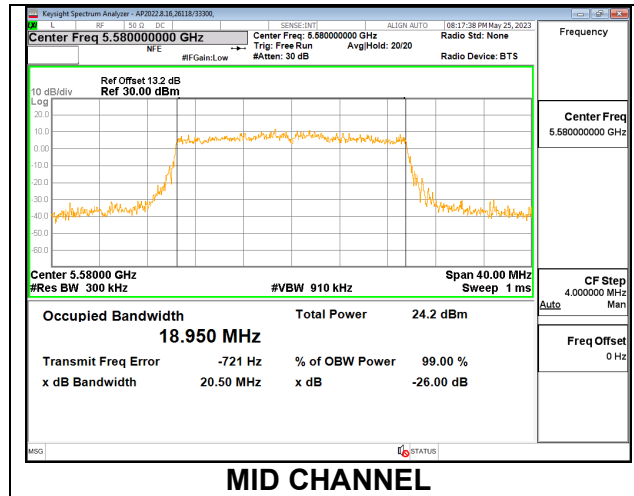


1TX Antenna 5 MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	19.21	18.0570
Mid	5580	19.27	18.1690
High	5700	19.26	18.1190
144	5720	19.19	18.1130

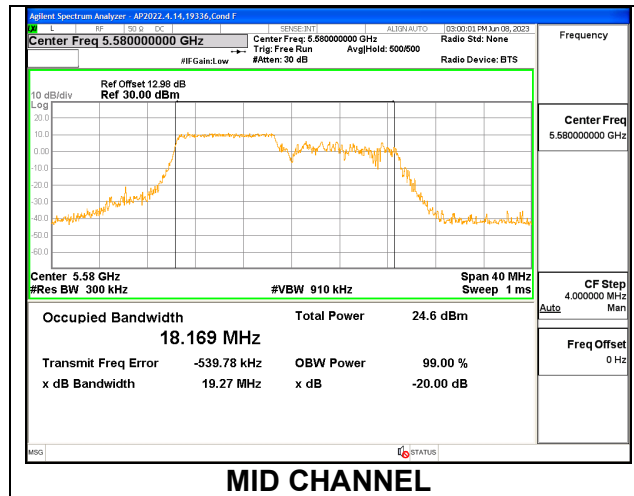


1TX Antenna 5 MODE: 106 Tones, RU Index 54

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	19.20	18.1070
Mid	5580	20.06	18.0640
High	5700	19.51	18.0320
144	5720	19.91	18.2280

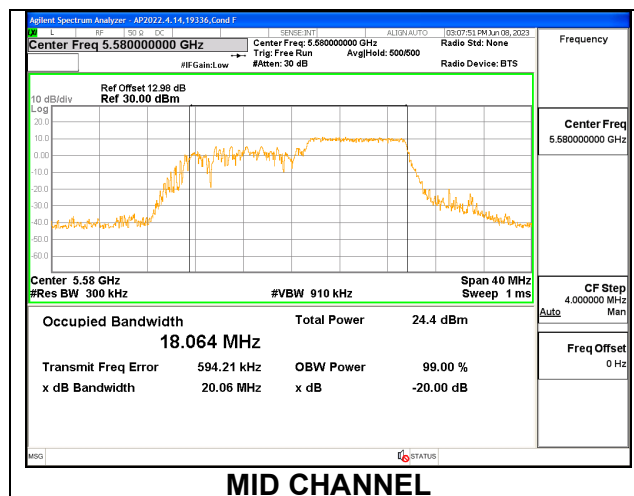



1TX Antenna 5 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	21.22	19.0240
Mid	5580	20.74	18.8900
High	5700	21.25	19.0270
144	5720	20.69	18.9040

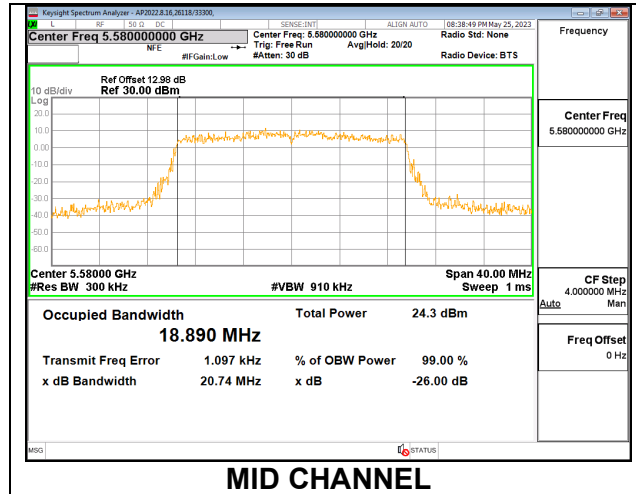



2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	19.55	19.10	18.2100	18.0570
Mid	5580	19.69	19.24	17.9940	18.1160
High	5700	19.68	19.25	18.1800	18.1220
144	5720	19.71	19.28	18.1160	18.1760

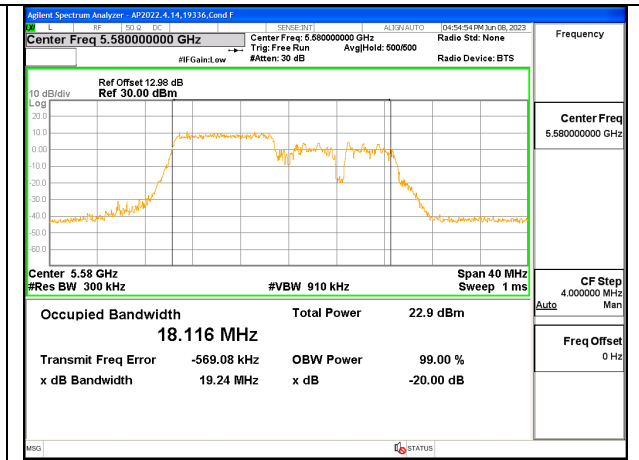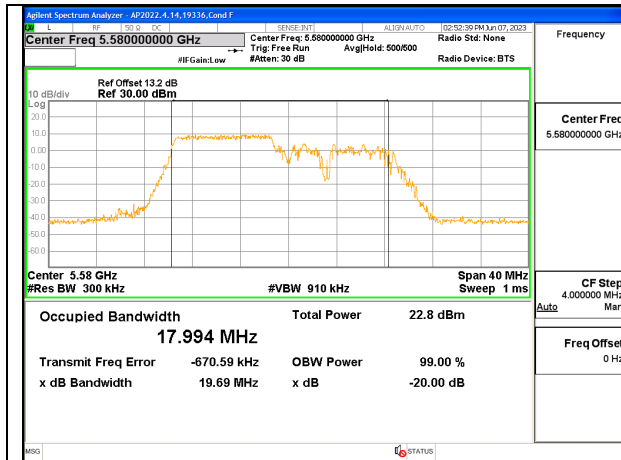



2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 54

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	19.34	19.21	18.0810	18.1690
Mid	5580	20.00	19.33	17.9420	18.1780
High	5700	20.19	19.14	18.2870	18.0330
144	5720	19.81	19.05	18.2260	18.1220

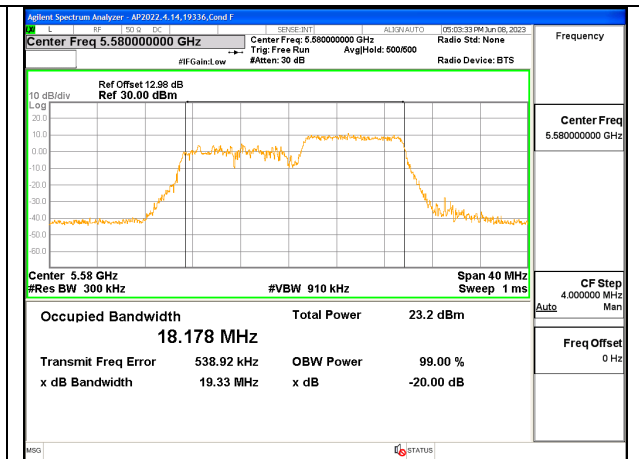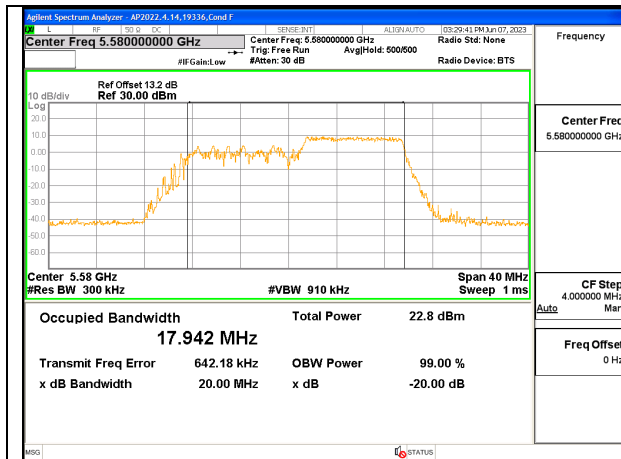

2TX Antenna 6 + Antenna 5 CDD MODE: SU Mode


Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5500	20.90	21.78	18.9830	18.9410
Mid	5580	20.46	20.51	18.8740	18.9290
High	5700	21.15	21.22	19.0150	18.9760
144	5720	20.63	20.79	18.8860	18.8700

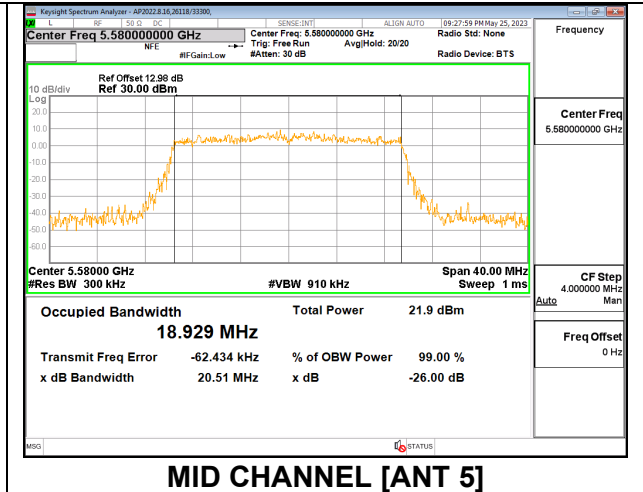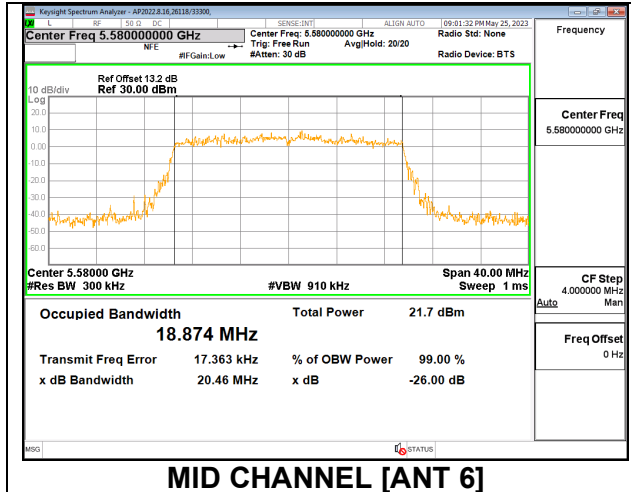

9.2.17. 802.11ax HE40 MODE IN THE 5.6 GHz BAND


1TX Antenna 6 MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	19.59	18.0480
Mid	5550	19.91	17.5500
High	5670	20.21	17.7090
142	5710	19.94	17.9400

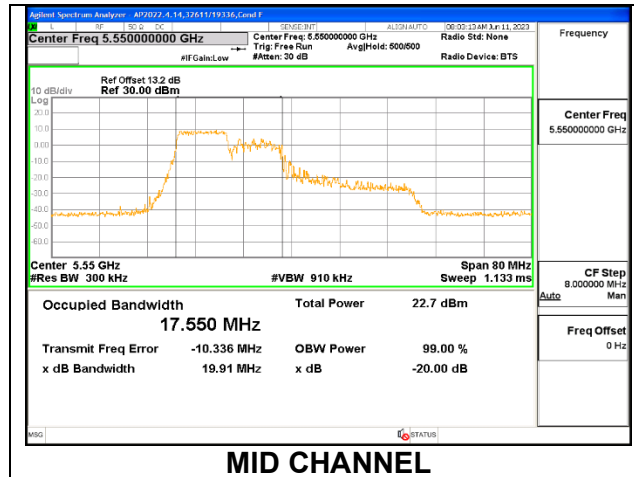


1TX Antenna 6 MODE: 106 Tones, RU Index 54

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	20.48	18.4140
Mid	5550	20.97	19.0780
High	5670	20.78	19.2540
142	5710	20.54	19.1750

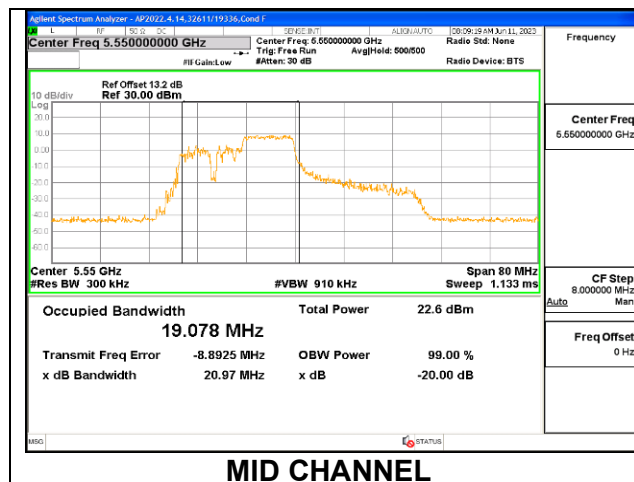


1TX Antenna 6 MODE: 106 Tones, RU Index 56

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	19.28	17.9260
Mid	5550	19.57	17.8450
High	5670	20.00	18.0180
142	5710	19.27	17.9320

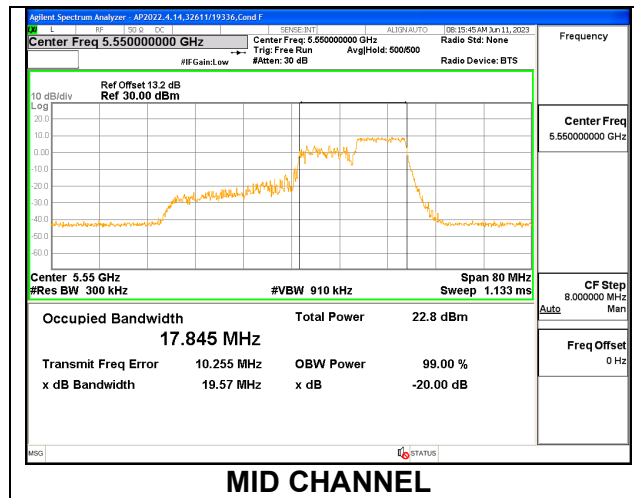


1TX Antenna 6 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	41.63	37.9920
Mid	5550	40.85	37.8540
High	5670	42.52	37.9590
142	5710	40.88	37.9100

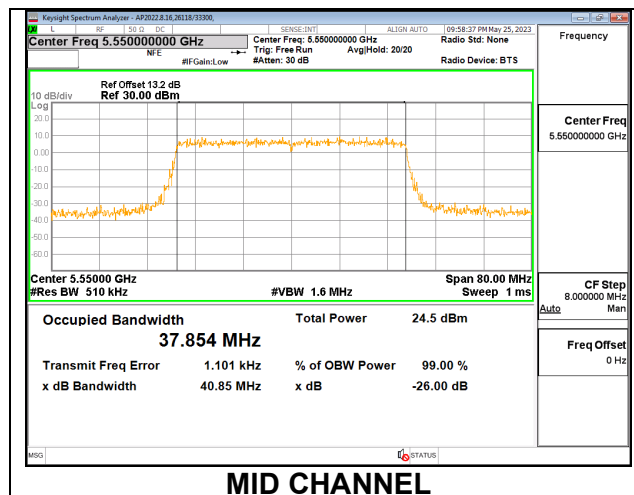


1TX Antenna 5 MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	19.52	17.8880
Mid	5550	19.42	17.8510
High	5670	18.83	17.8670
142	5710	19.74	17.9000

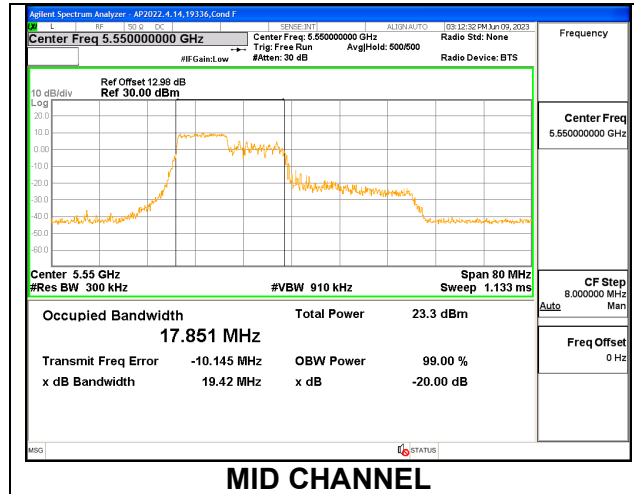


1TX Antenna 5 MODE: 106 Tones, RU Index 54

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	20.82	19.2820
Mid	5550	21.00	18.9520
High	5670	20.81	19.2040
142	5710	20.64	18.9760

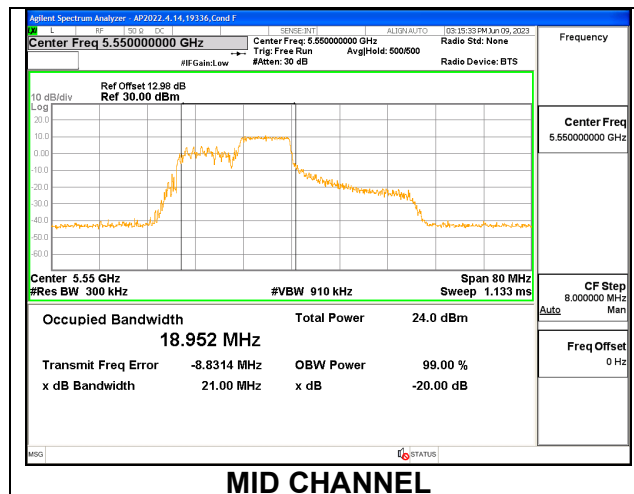


1TX Antenna 5 MODE: 106 Tones, RU Index 56

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	19.04	17.7920
Mid	5550	19.26	17.8730
High	5670	19.90	17.9580
142	5710	20.02	17.8956

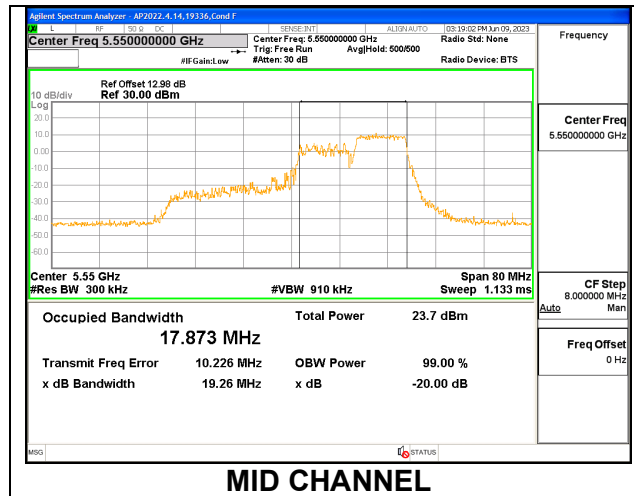



1TX Antenna 5 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	41.97	37.9450
Mid	5550	40.57	37.9230
High	5670	43.18	37.9590
142	5710	40.50	37.9720

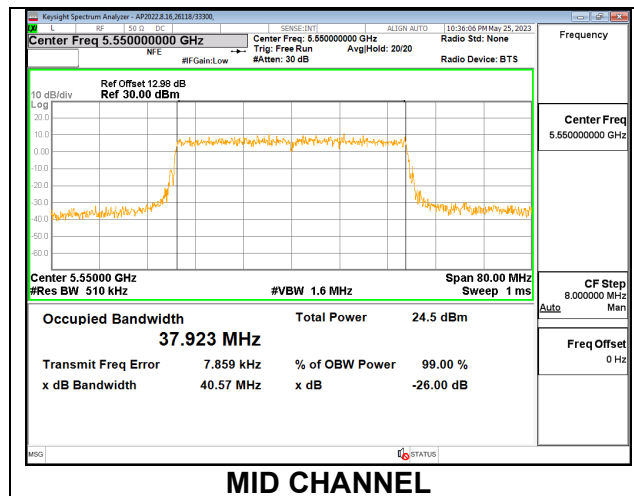



2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	20.48	18.74	18.41	17.7520
Mid	5550	20.36	18.85	18.28	17.8080
High	5670	19.58	18.78	18.14	17.7790
142	5710	20.21	18.88	18.23	17.5690

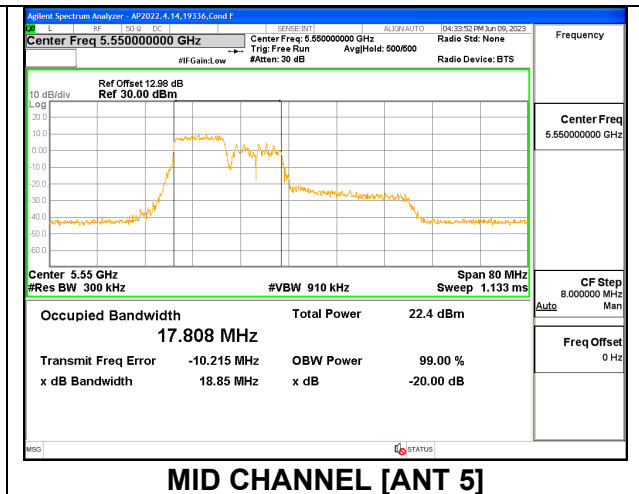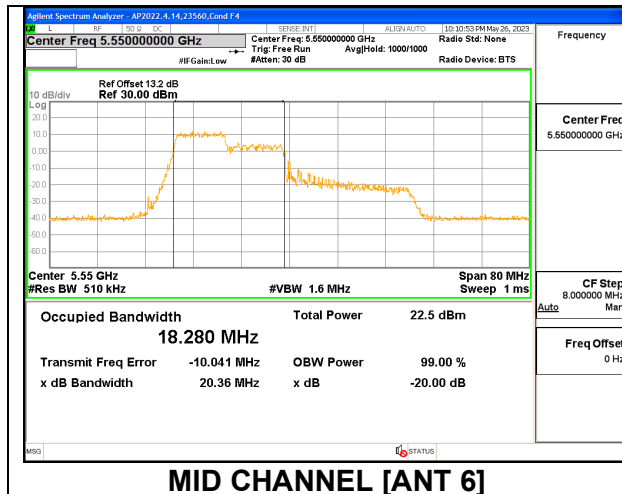


2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 54

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	22.67	20.13	20.4370	19.2010
Mid	5550	21.44	20.01	20.2250	18.8670
High	5670	21.89	19.42	20.1720	18.3320
142	5710	21.11	19.84	20.0890	18.7830

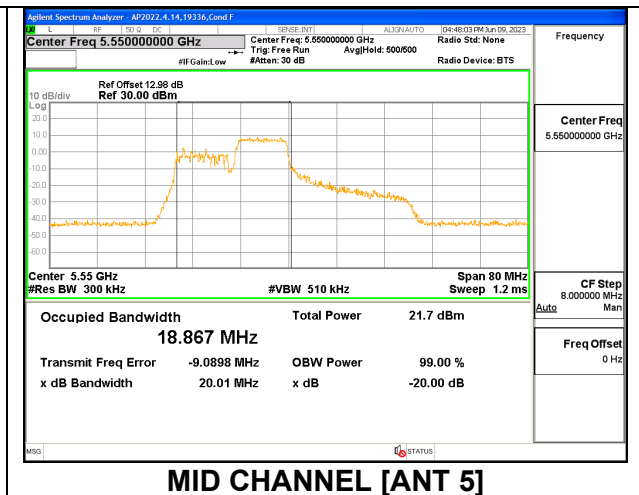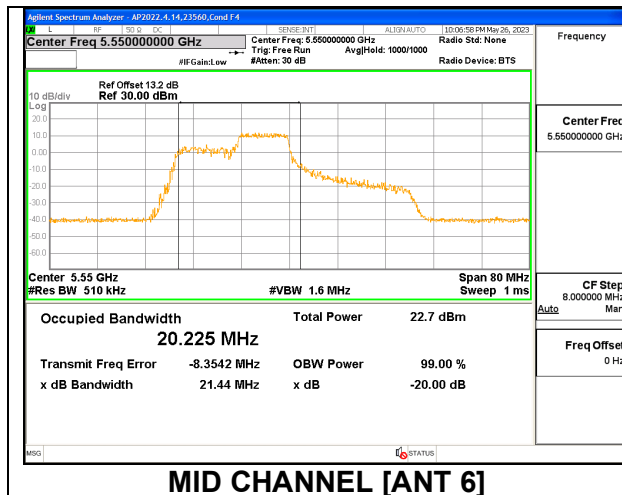


2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 56

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	20.15	18.85	18.2740	17.8590
Mid	5550	19.99	18.78	18.1650	17.4960
High	5670	19.78	19.03	18.2890	17.7650
142	5710	19.71	19.09	18.3360	17.7990

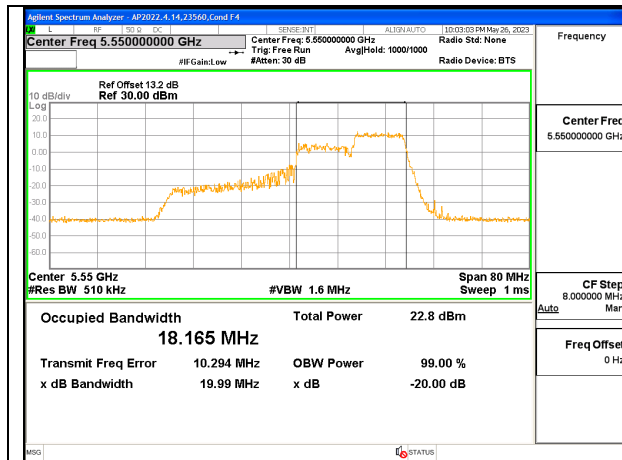


MID CHANNEL [ANT 6]

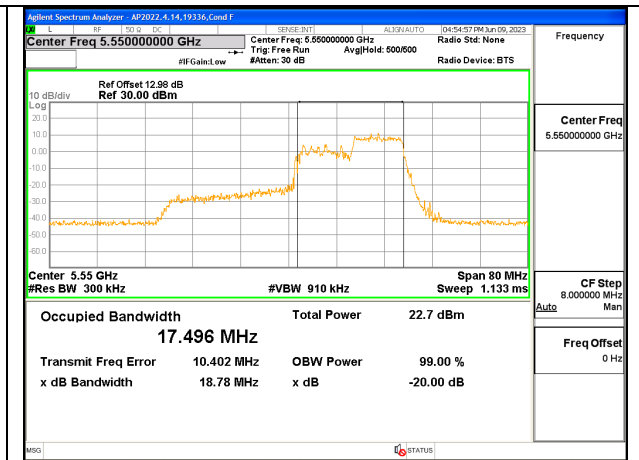


MID CHANNEL [ANT 5]

2TX Antenna 6 + Antenna 5 CDD MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5510	42.31	40.00	37.9650	37.9670
Mid	5550	40.59	39.29	37.8930	37.9300
High	5670	41.37	39.82	38.0230	37.9850
142	5710	40.39	39.19	37.8850	37.9660

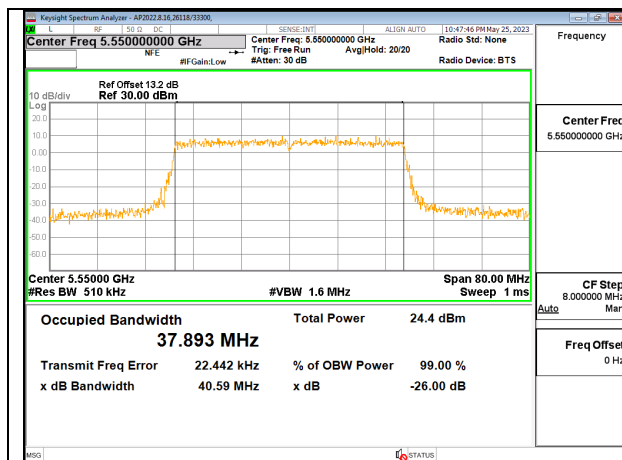

MID CHANNEL [ANT 6]

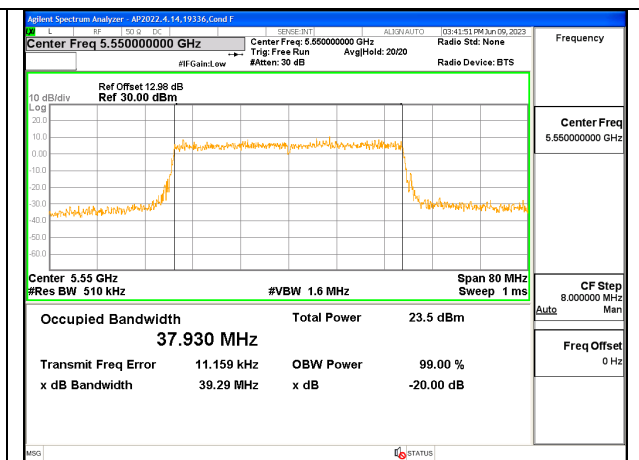


MID CHANNEL [ANT 5]

9.2.18. 802.11ax HE80 MODE IN THE 5.6 GHz BAND


1TX Antenna 6 MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	21.64	17.8730
High	5610	20.96	17.8770
138	5690	20.74	17.8340

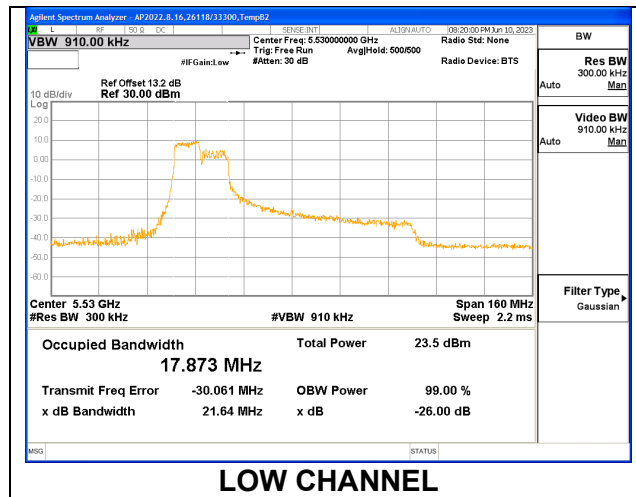


1TX Antenna 6 MODE: 106 Tones, RU Index 56

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	24.76	18.2730
High	5610	25.45	18.0680
138	5690	26.39	18.3650

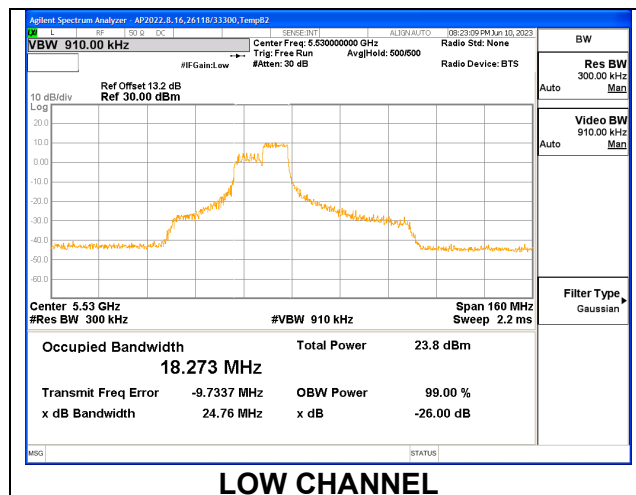


1TX Antenna 6 MODE: 106 Tones, RU Index 60

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	23.40	18.4150
High	5610	23.16	18.3440
138	5690	23.58	18.3510

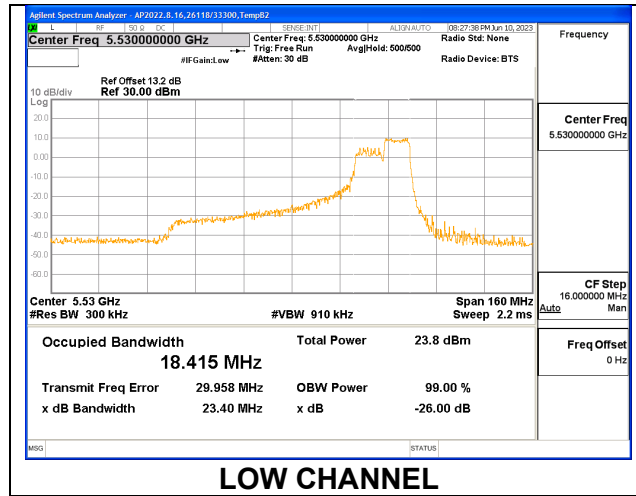


1TX Antenna 6 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	81.92	77.4090
High	5610	80.65	77.2910
138	5690	81.97	77.4710

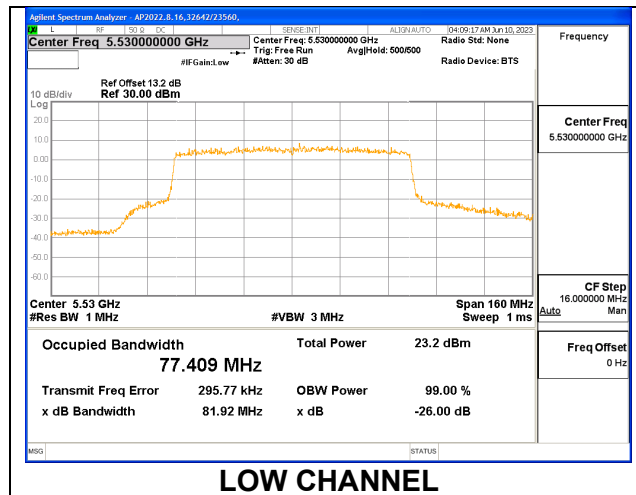


1TX Antenna 5 MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	21.42	17.8760
High	5610	20.90	17.8850
138	5690	20.98	17.8420

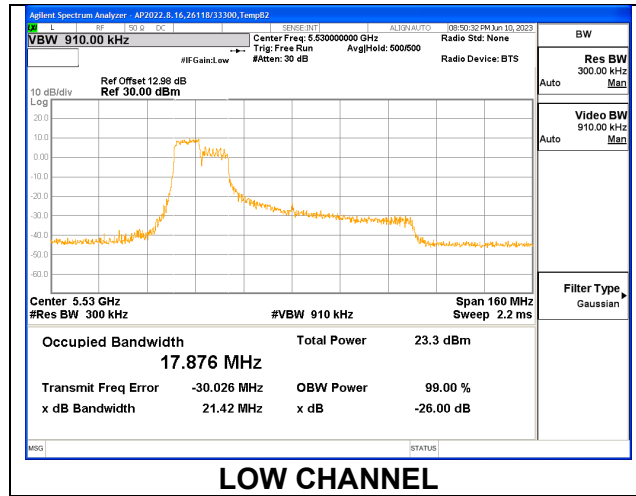


1TX Antenna 5 MODE: 106 Tones, RU Index 56

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	25.19	18.0020
High	5610	24.84	18.2010
138	5690	25.02	18.1320

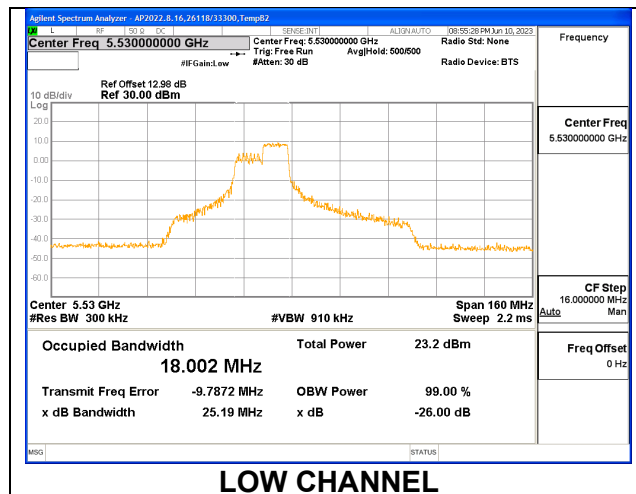


1TX Antenna 5 MODE: 106 Tones, RU Index 60

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	24.03	18.3540
High	5610	23.49	18.2630
138	5690	22.72	18.3570

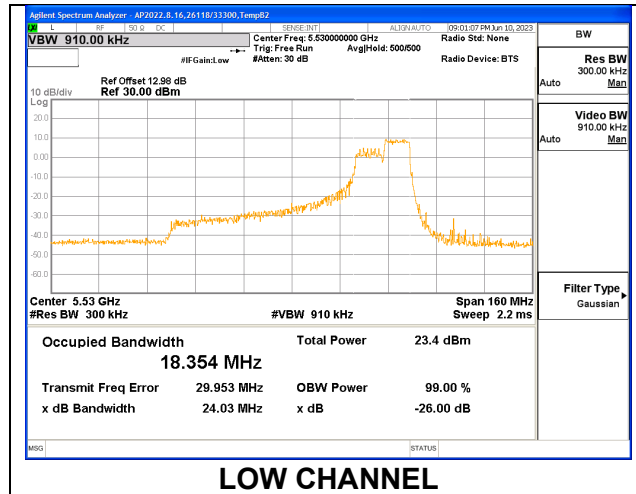


1TX Antenna 5 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5530	81.60	77.2450
High	5610	91.31	77.5490
138	5690	81.61	77.3650

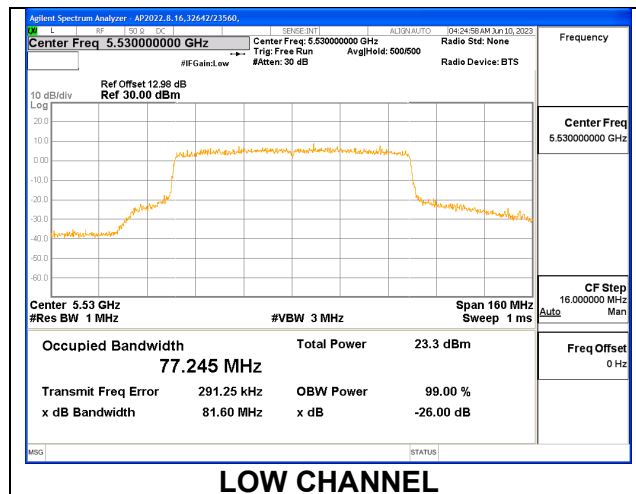


2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 53

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	21.1900	19.5700	17.8890	17.8360
High	5610	21.1300	19.5800	17.8740	17.8090
138	5690	21.2000	19.8600	17.8510	17.8260

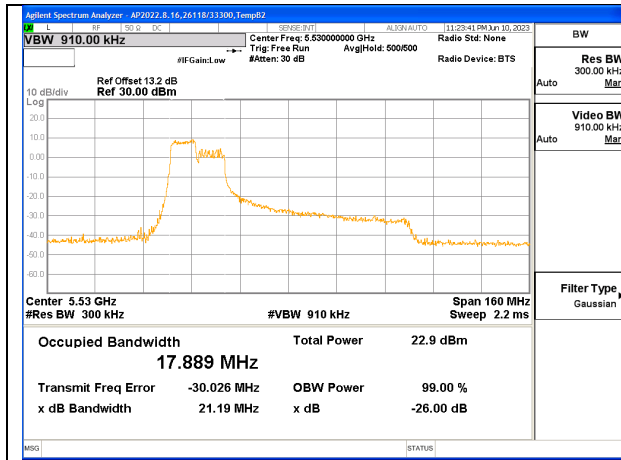


LOW CHANNEL [ANT 6]

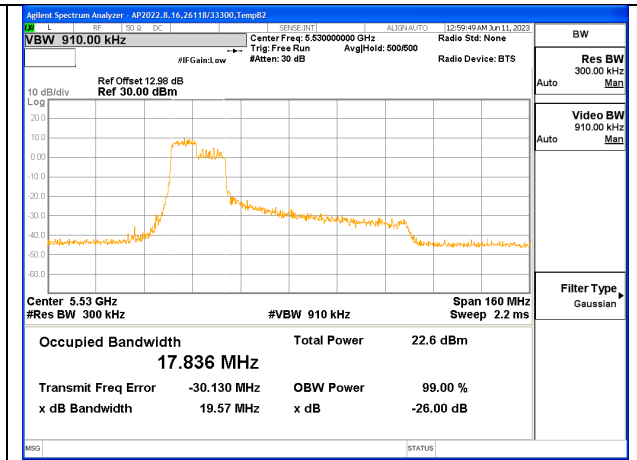


LOW CHANNEL [ANT 5]

2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 56

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	24.50	21.46	18.1540	17.6890
High	5610	24.31	21.39	18.1220	17.5100
138	5690	26.66	21.32	17.9770	17.6960

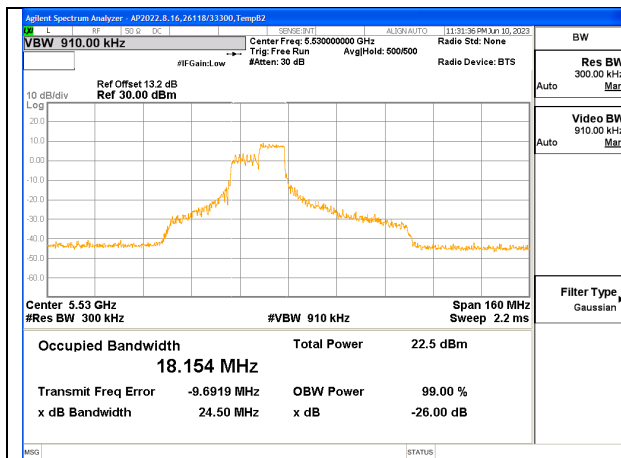



LOW CHANNEL [ANT 6]

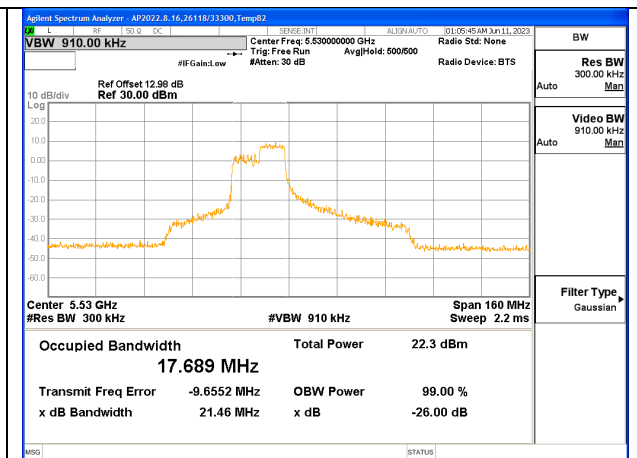

LOW CHANNEL [ANT 5]



2TX Antenna 6 + Antenna 5 CDD MODE: 106 Tones, RU Index 60

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	23.49	19.70	18.3840	17.7570
High	5610	23.79	19.93	18.3740	17.8060
138	5690	23.06	19.82	18.3200	17.7620

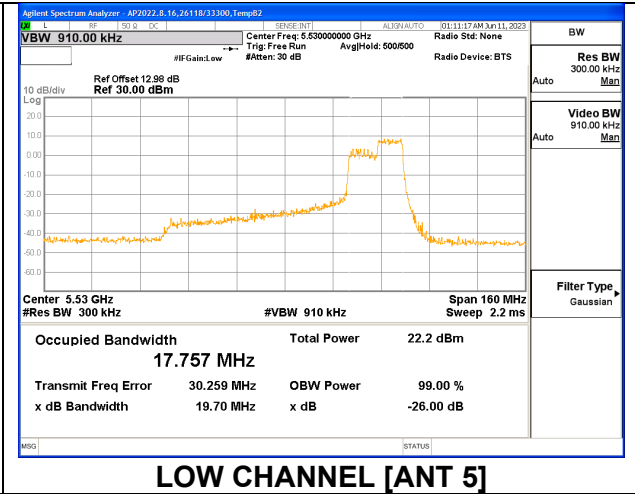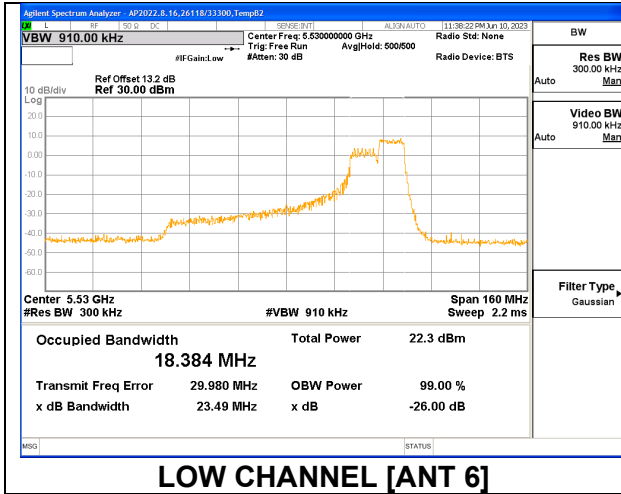

2TX Antenna 6 + Antenna 5 CDD MODE: SU Mode


Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5530	84.61	82.44	77.2310	77.2720
High	5610	82.38	82.78	77.2840	77.4170
138	5690	81.71	81.61	77.3470	77.3650

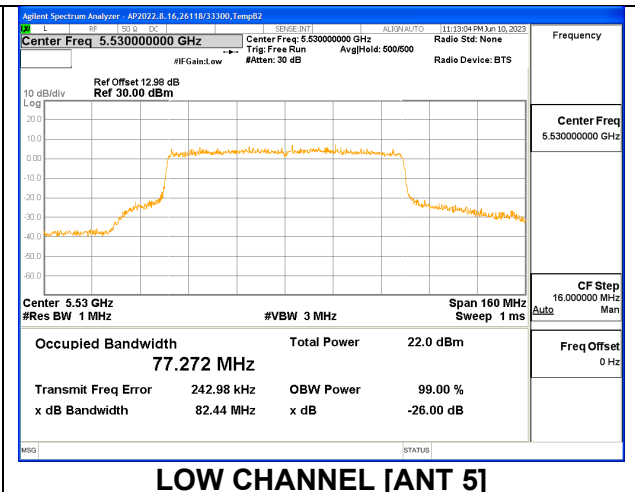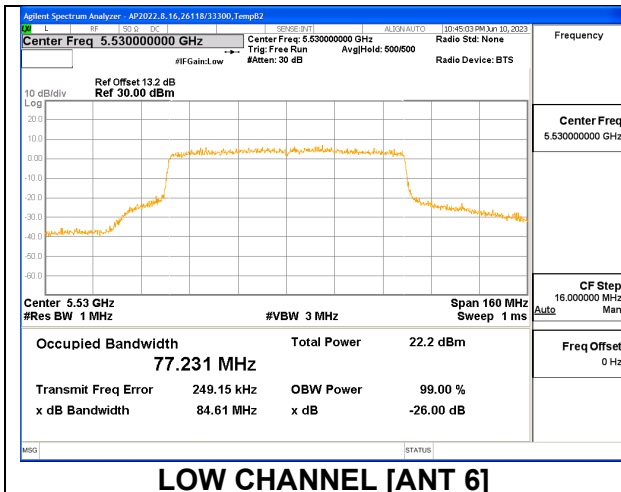

9.2.19. 802.11n HT20 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.05	17.9020
Mid	5785	21.15	17.8630
High	5825	21.10	17.8730

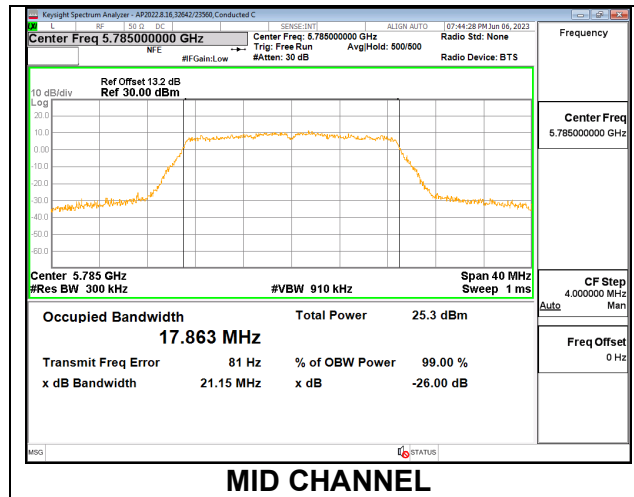



1TX Antenna 5 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.16	17.8520
Mid	5785	21.11	17.8630
High	5825	21.33	17.9000

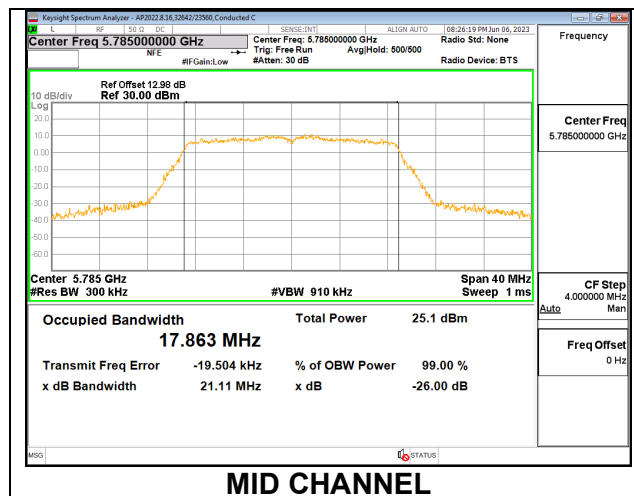

2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	21.160	20.980	17.841	17.766
Mid	5785	21.090	20.900	17.810	17.754
High	5825	20.900	21.030	17.856	17.783

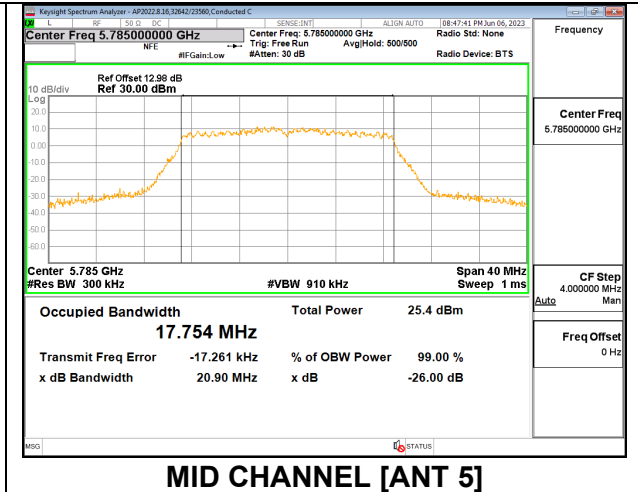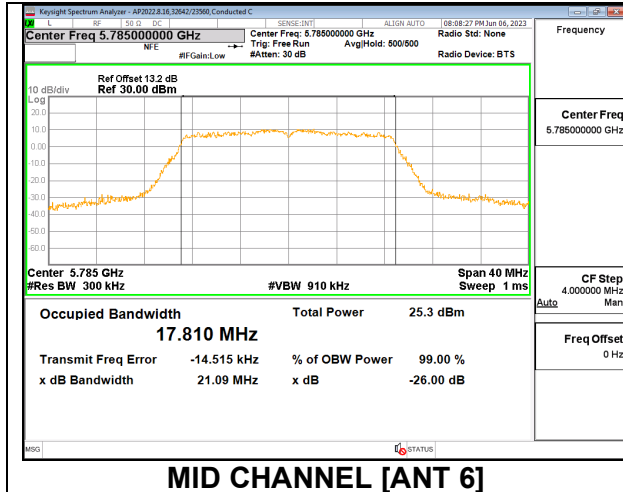

9.2.20. 802.11n HT40 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.49	36.2920
High	5795	40.84	36.3630

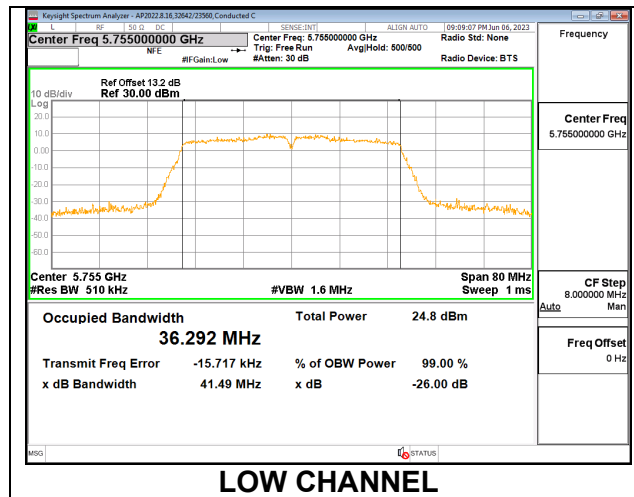


1TX Antenna 5 MODE

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.00	36.3750
High	5795	41.41	36.3470

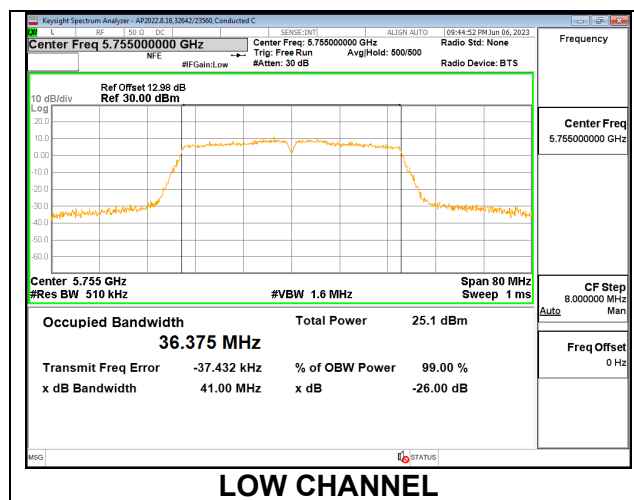

2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	41.18	40.73	36.3700	36.2200
High	5795	41.50	40.79	36.3680	36.2500

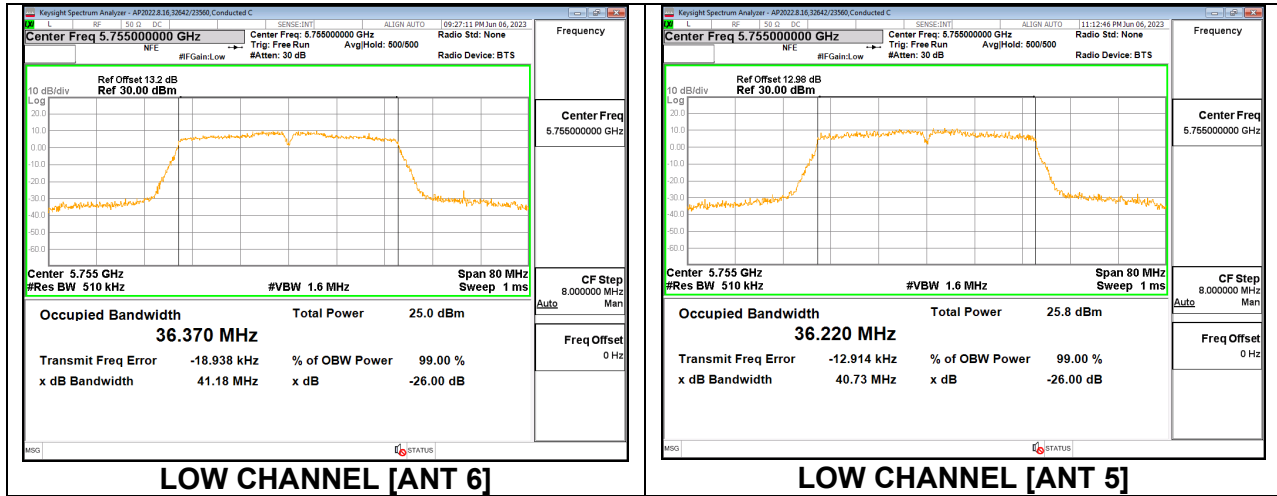

9.2.21. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	81.50	75.5140

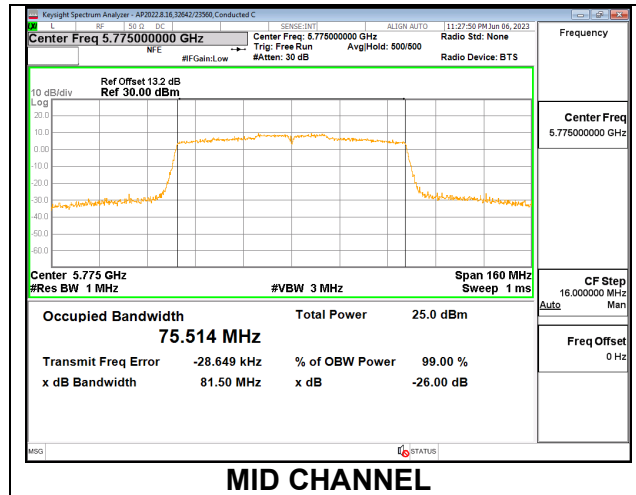



1TX Antenna 5 MODE

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	81.08	75.3950

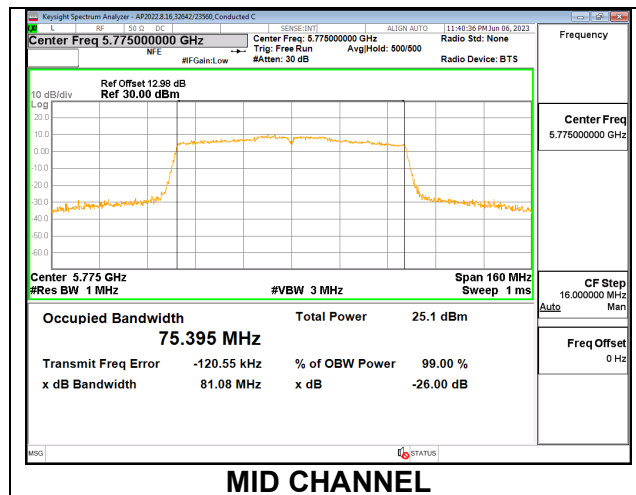

2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	26dB Bandwidth Antenna 6 (MHz)	26dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	81.17	80.58	75.4750	75.4300

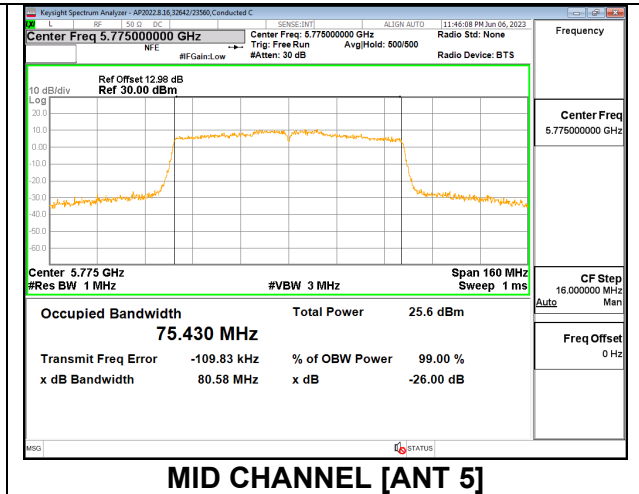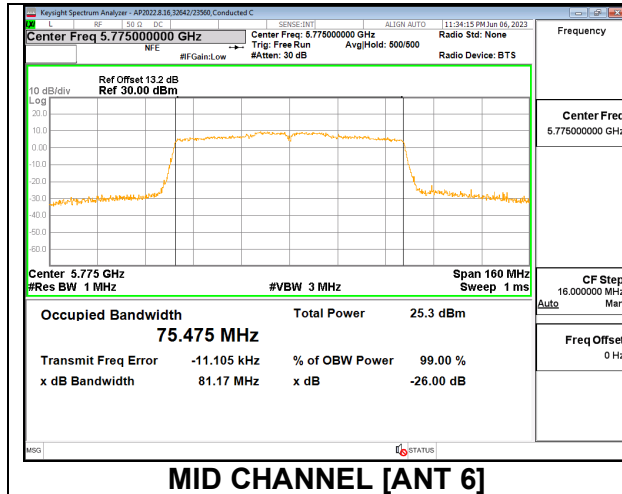

9.2.22. 802.11ax HE20 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.89	18.3860
Mid	5785	20.08	18.3340
High	5825	19.79	18.3580

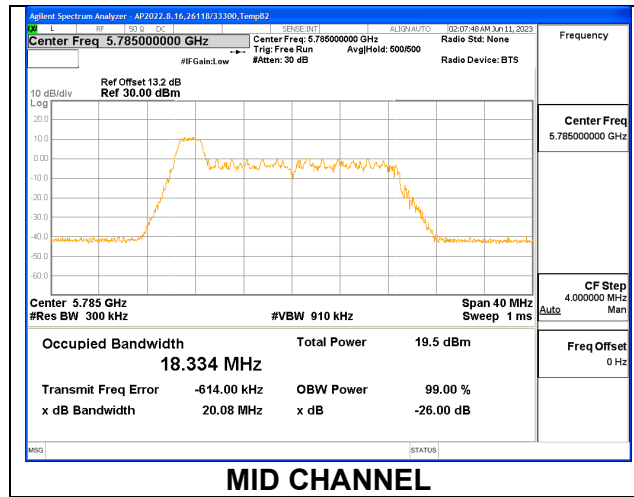


1TX Antenna 6 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.33	17.2120
Mid	5785	19.11	17.2550
High	5825	19.21	17.1980

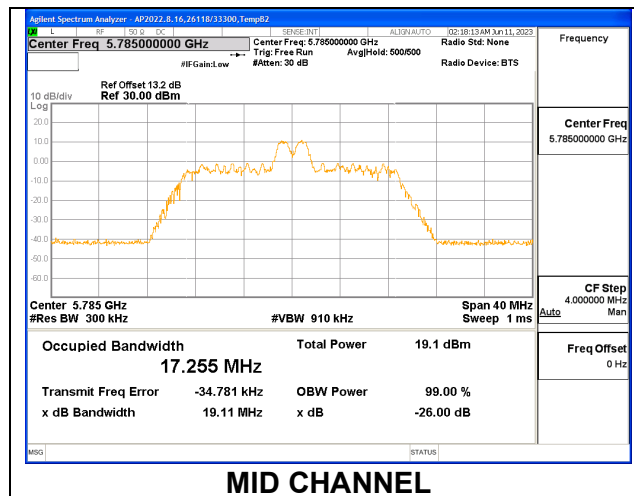


1TX Antenna 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.36	18.6150
Mid	5785	20.68	18.6170
High	5825	20.51	18.5880

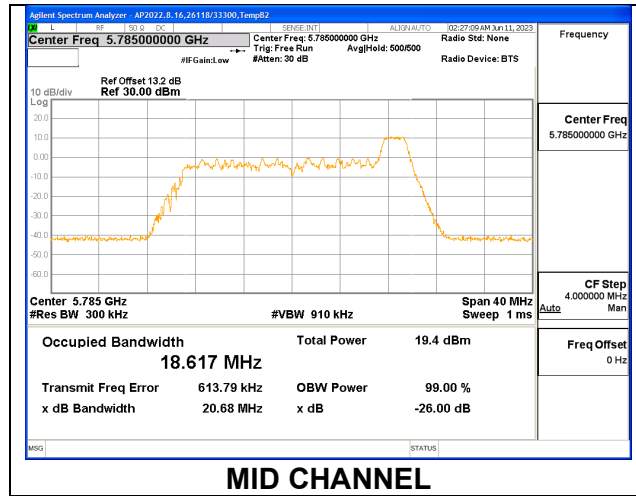


1TX Antenna 6 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	21.19	18.9790
Mid	5785	21.01	18.9790
High	5825	20.97	18.9740

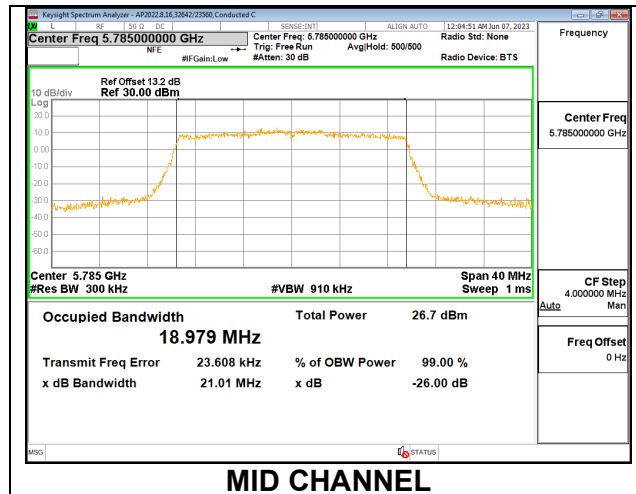


1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.91	18.4150
Mid	5785	19.81	18.3470
High	5825	19.85	18.3260

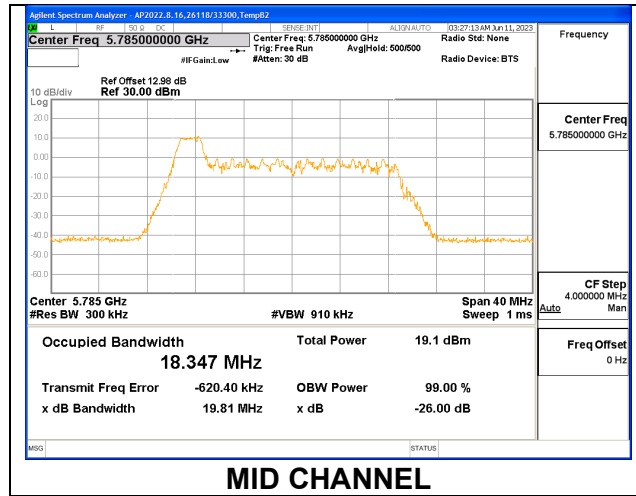


1TX Antenna 5 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	19.29	17.2790
Mid	5785	19.10	17.2240
High	5825	20.40	18.5890

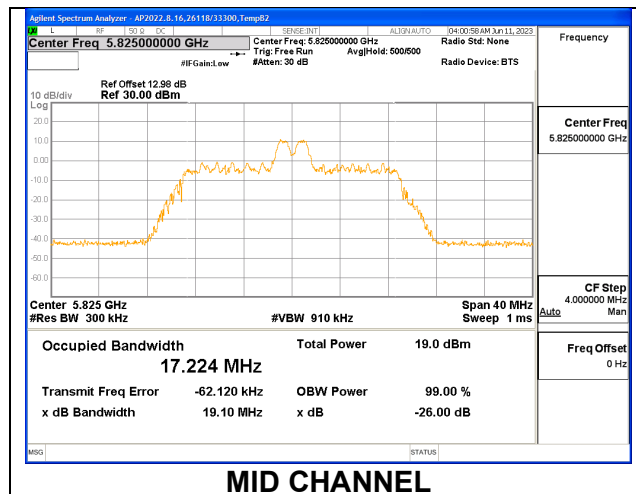


1TX Antenna 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.40	18.5890
Mid	5785	20.47	18.5780
High	5825	20.47	18.6240

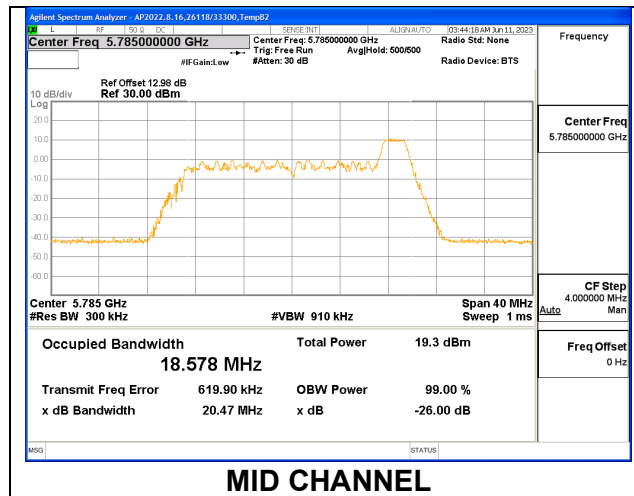



1TX Antenna 5 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	20.94	18.9710
Mid	5785	21.14	18.9610
High	5825	21.30	18.9590

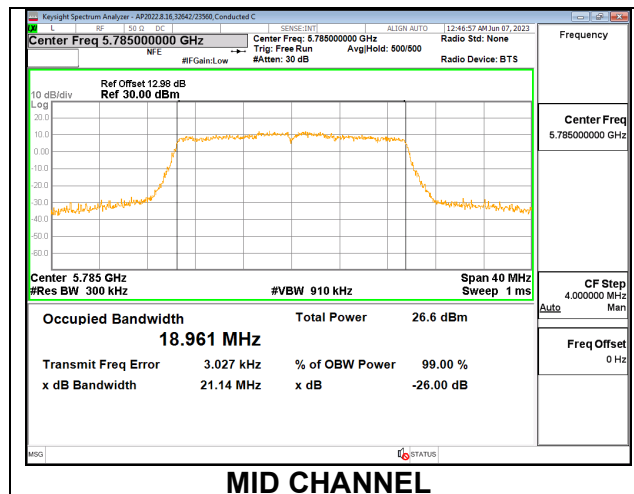



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	18.96	18.96	18.3040	18.2400
Mid	5785	19.11	18.99	18.3160	18.1350
High	5825	19.00	19.56	18.3440	18.2180

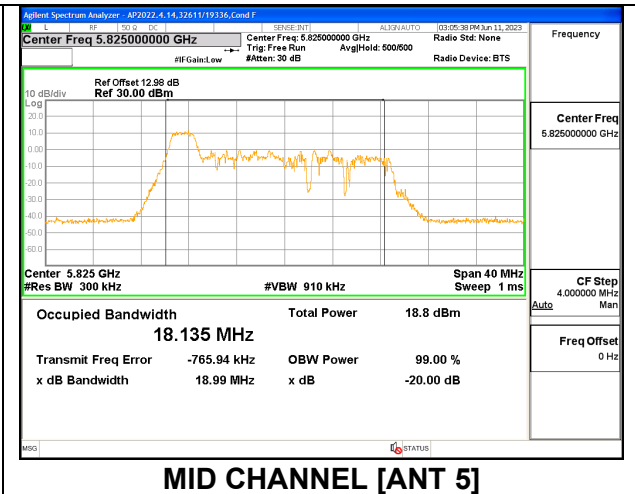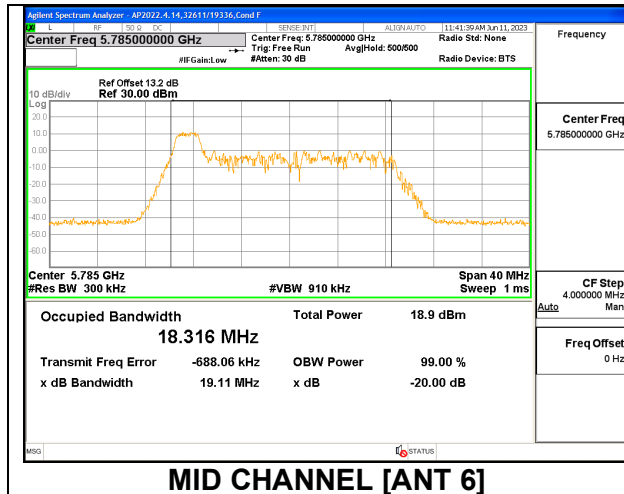



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	17.79	17.74	16.9800	16.8130
Mid	5785	18.01	17.81	16.8810	17.0290
High	5825	17.80	17.97	17.0370	16.8540

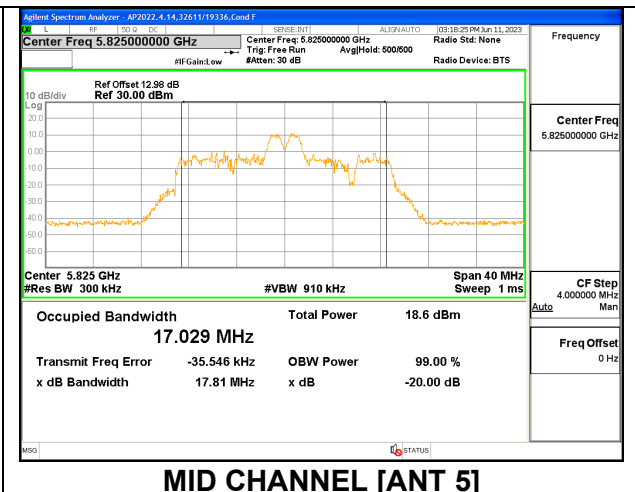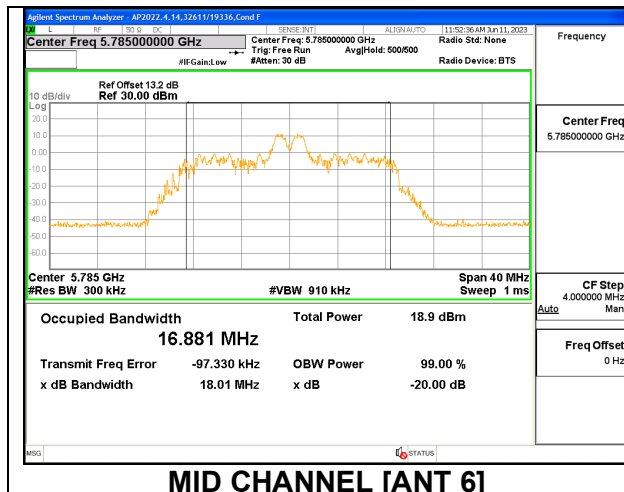



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	19.07	19.13	18.4240	18.3330
Mid	5785	19.27	19.12	18.4810	18.2580
High	5825	19.37	19.00	18.5600	18.3660

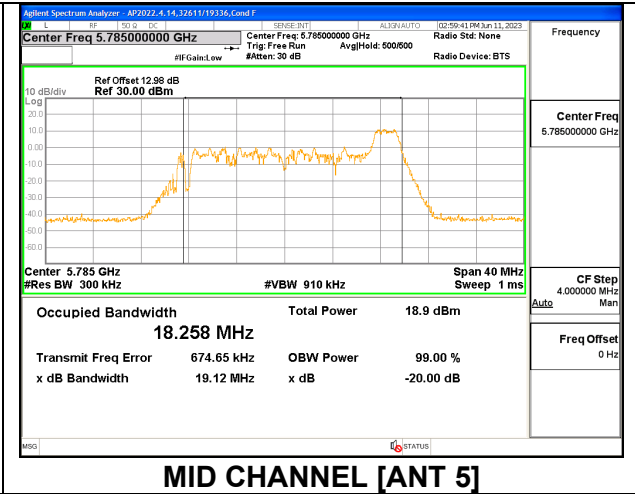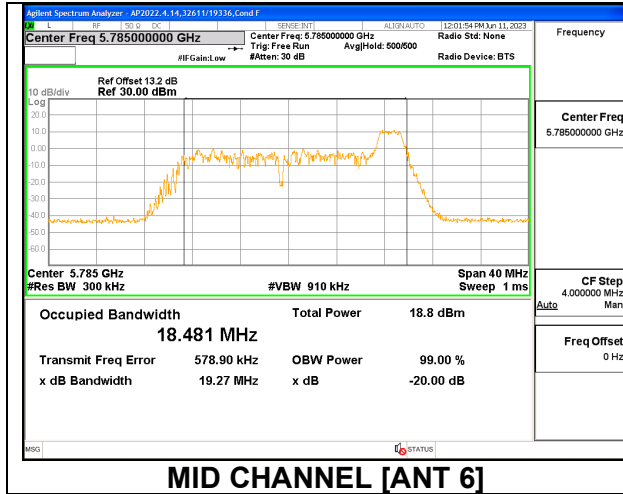

2TX Antenna 6 + Antenna 5 CDD MODE: SU Mode


Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5745	21.12	21.18	18.9400	18.9530
Mid	5785	21.25	20.97	19.0100	18.9850
High	5825	21.03	20.93	18.9500	18.9560

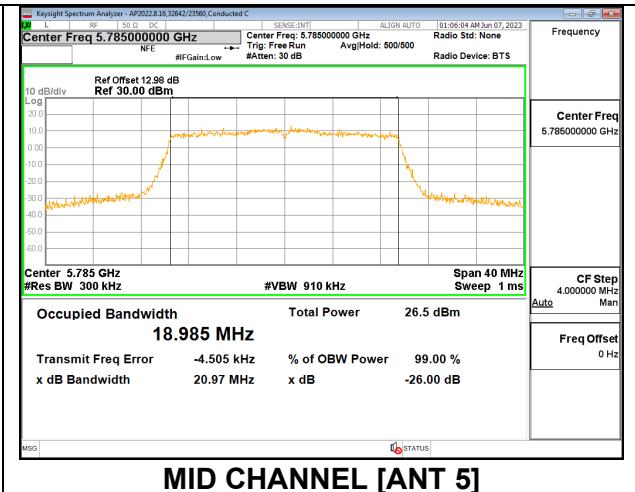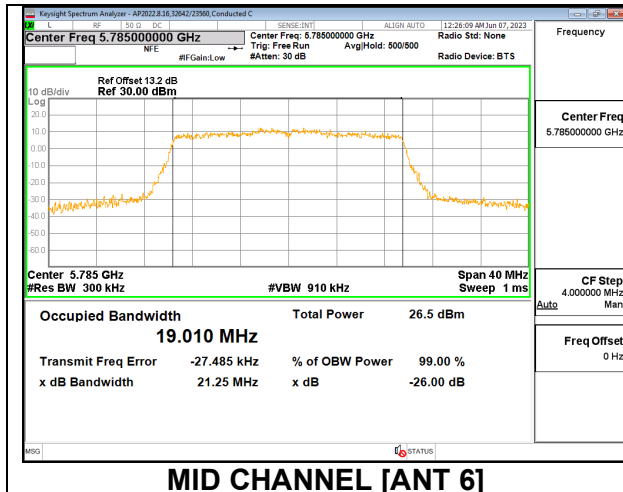

9.2.23. 802.11ax HE40 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.34	18.7000
High	5795	21.04	18.6520

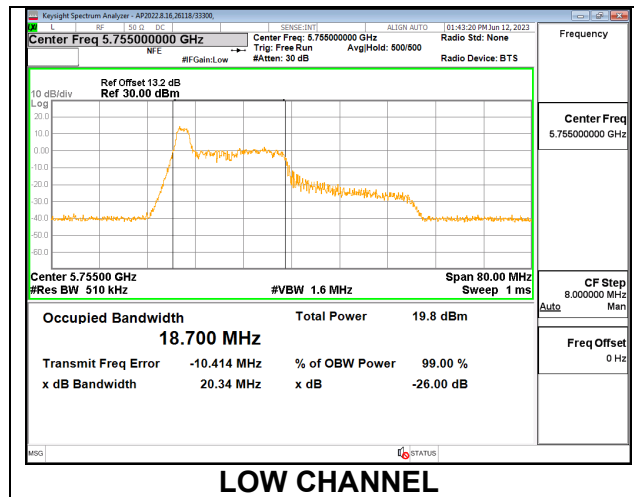


1TX Antenna 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	23.12	21.4250
High	5795	24.32	21.6940

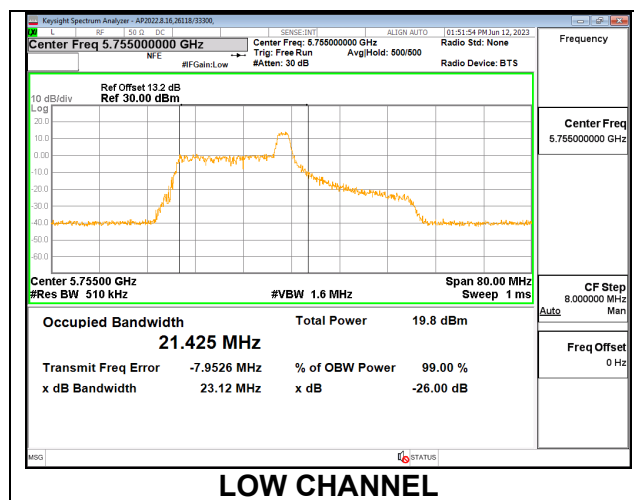


1TX Antenna 6 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	21.10	19.0810
High	5795	21.25	18.8260

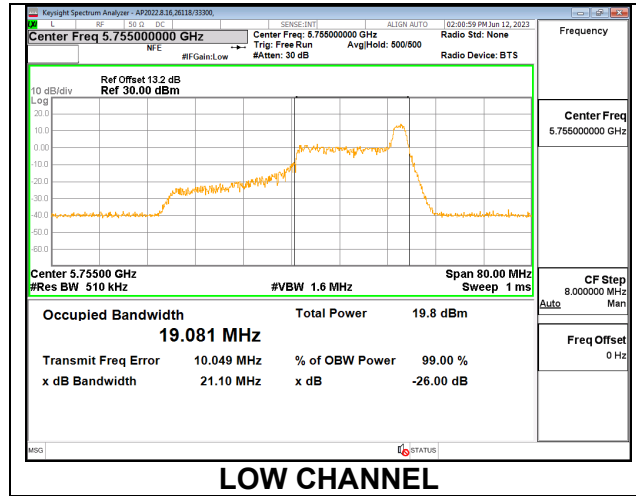


1TX Antenna 6 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.67	38.0270
High	5795	41.50	38.0310

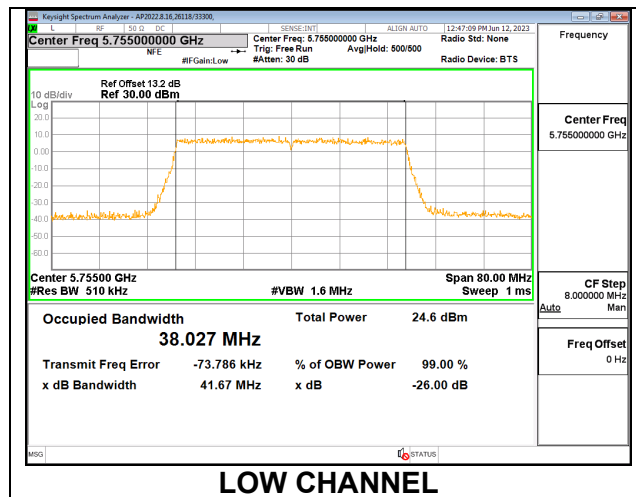


1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	20.81	18.6500
High	5795	19.94	18.3100

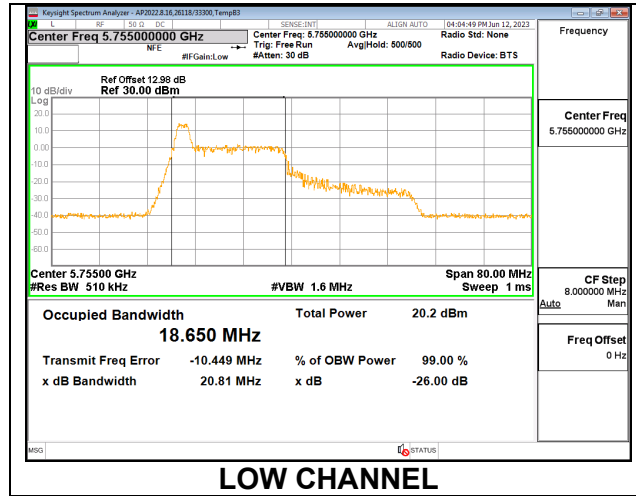


1TX Antenna 5 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	23.17	21.2070
High	5795	23.46	21.2730

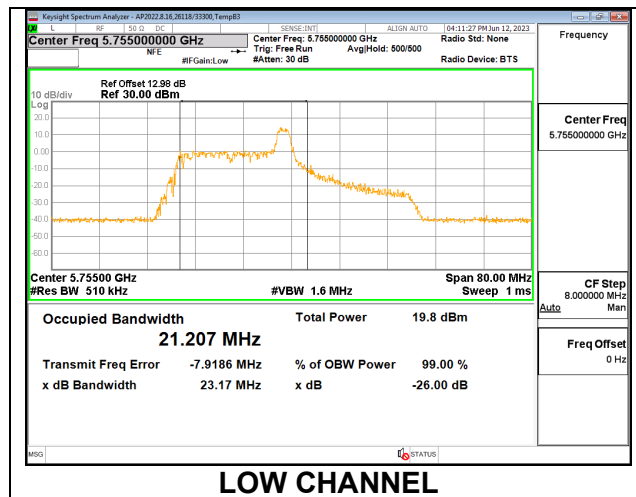


1TX Antenna 5 MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	21.45	19.1090
High	5795	21.10	18.9680

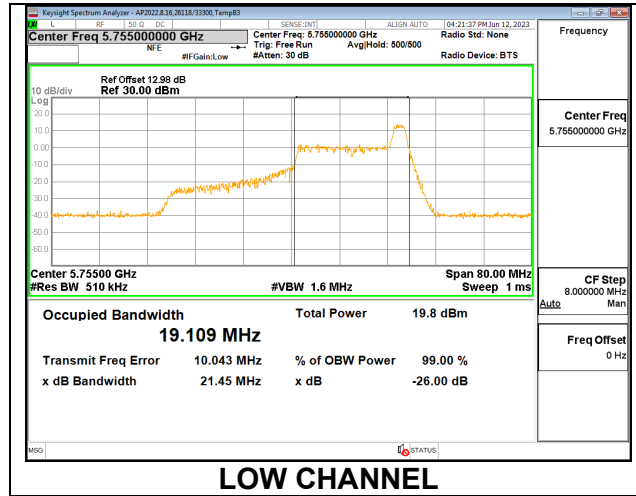



1TX Antenna 5 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5755	41.64	38.0110
High	5795	41.57	38.0190

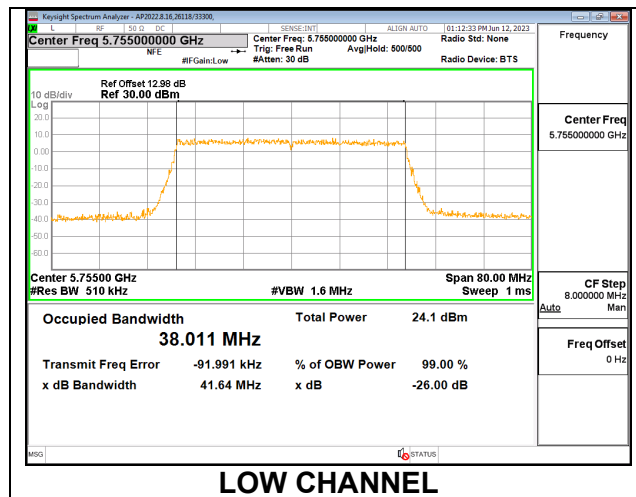



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	20.83	20.19	18.6240	18.3870
High	5795	20.47	19.74	18.7010	18.2430

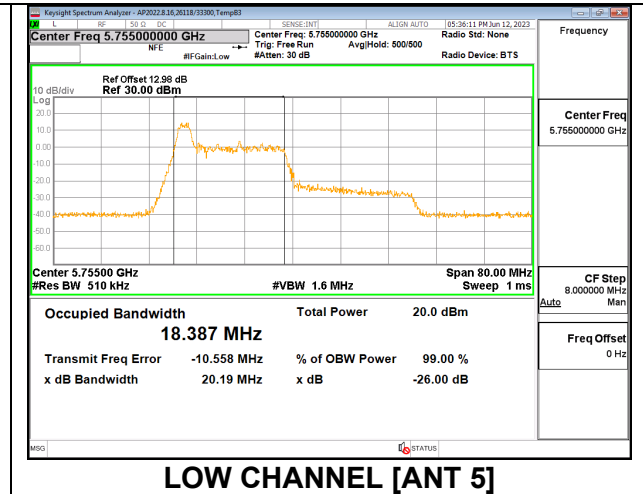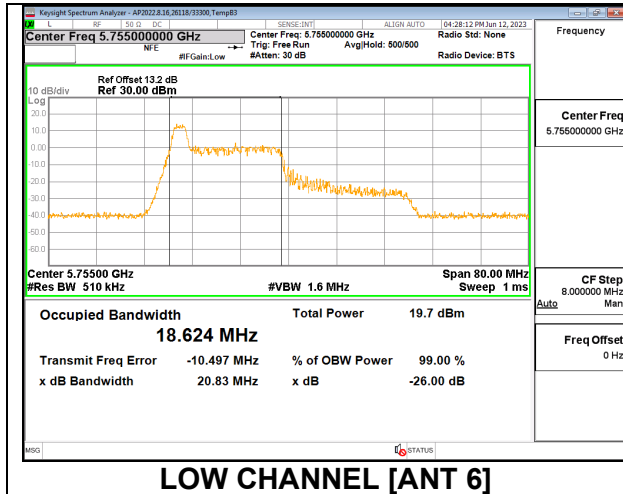



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	22.70	22.96	21.2210	21.3290
High	5795	22.65	22.26	21.5330	20.7550

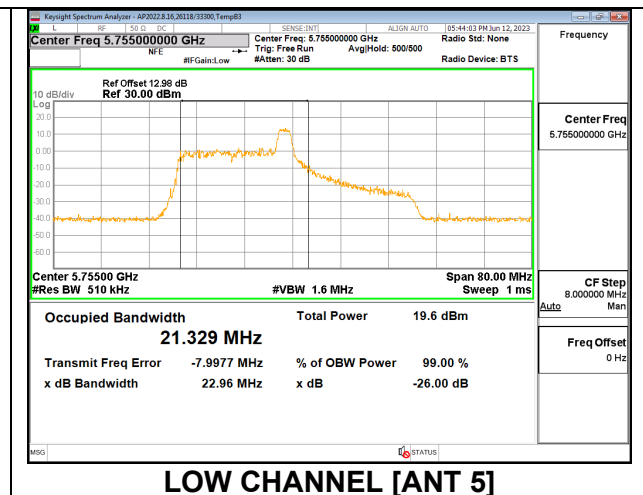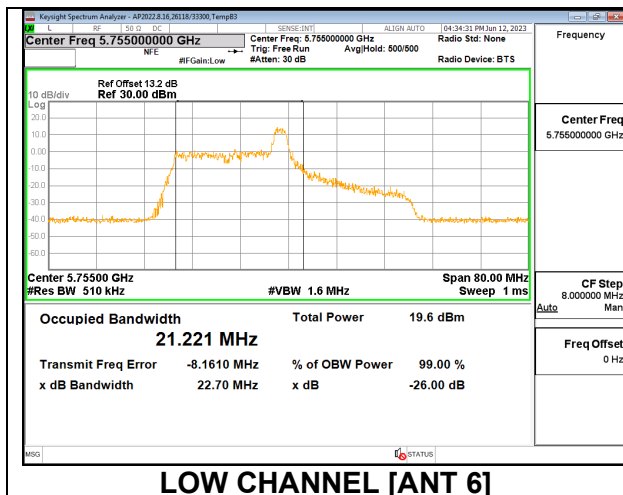



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 17

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	21.0600	19.7000	18.9130	18.3420
High	5795	20.4700	20.0000	18.8920	18.4260

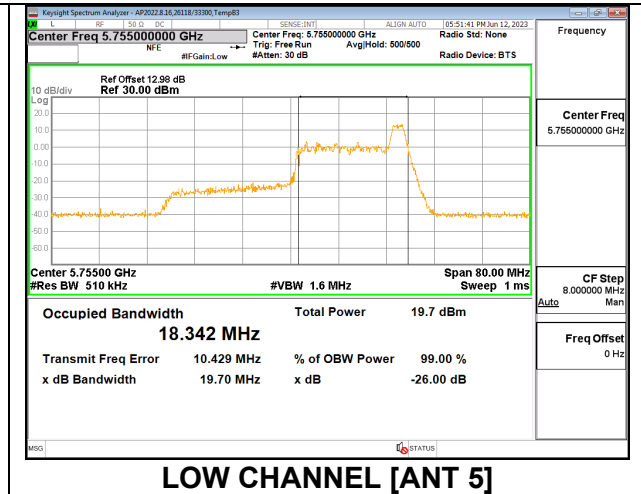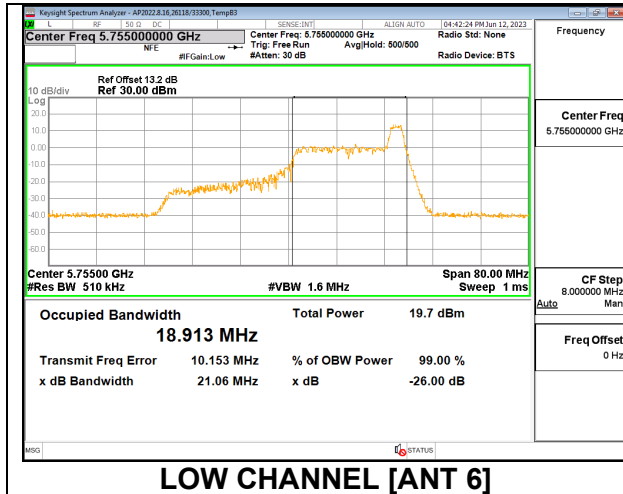

2TX Antenna 6 + Antenna 5 CDD MODE: SU Mode


Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Low	5755	41.1800	41.1100	38.0000	38.0000
High	5795	41.2800	41.2000	38.0200	38.0060

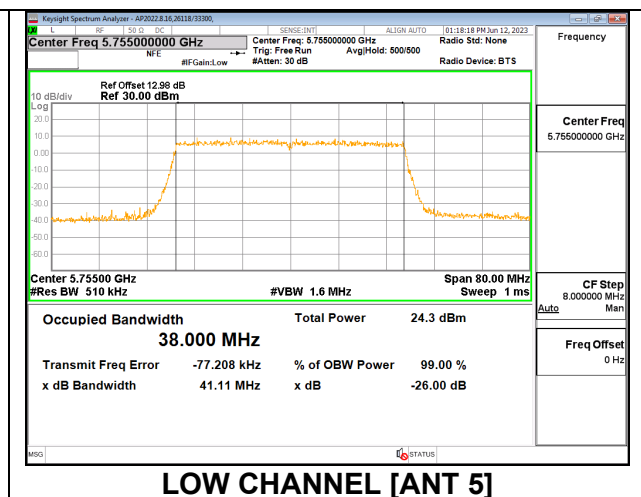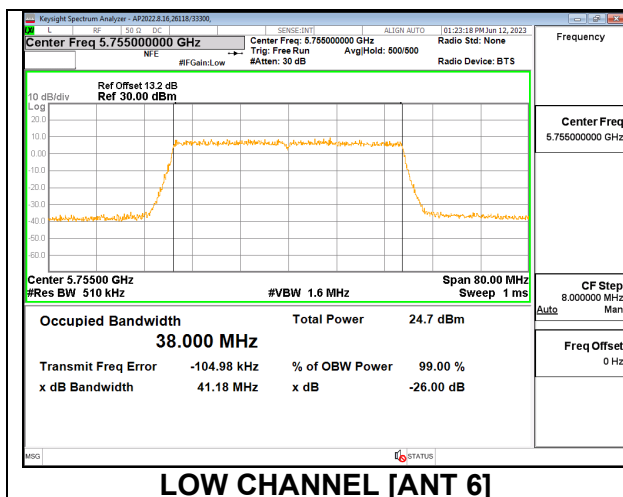

9.2.24. 802.11ax HE80 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	19.64	18.1510

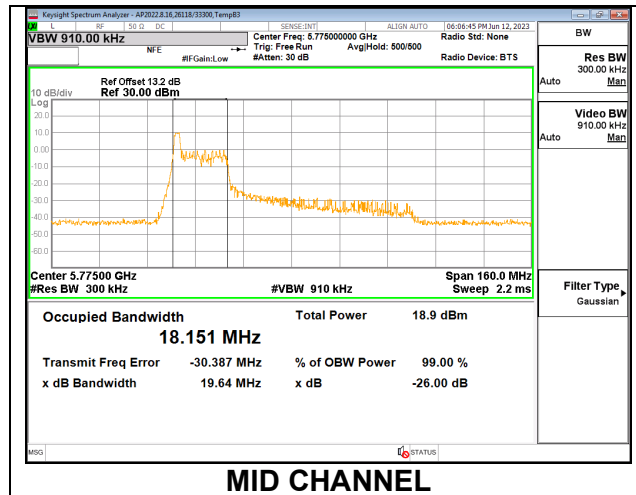


1TX Antenna 6 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	39.42	37.0120

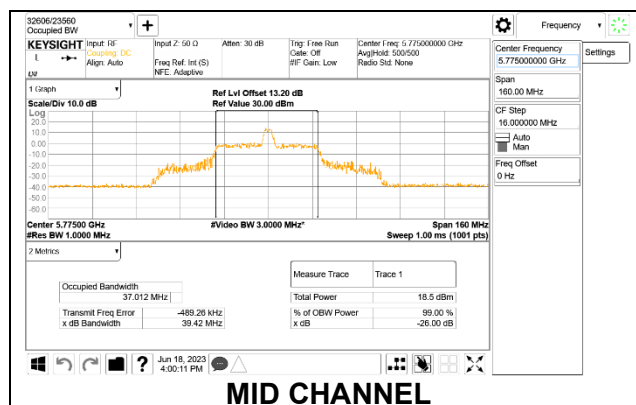


1TX Antenna 6 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	20.75	18.6130

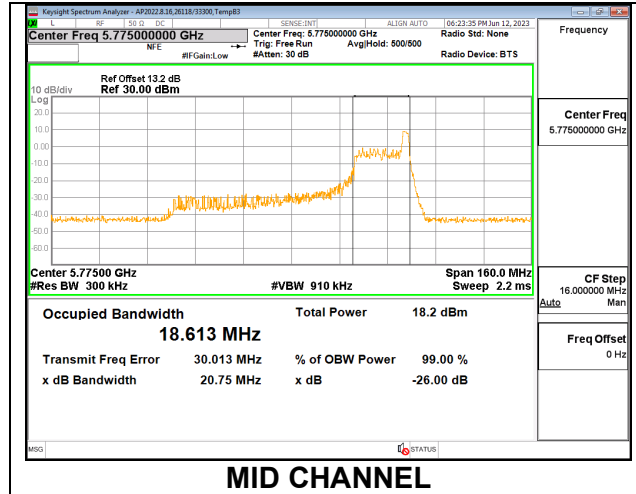


1TX Antenna 6 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	81.76	77.5020

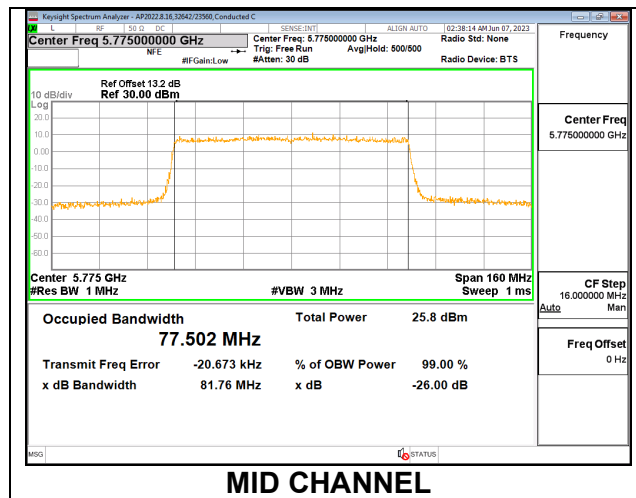


1TX Antenna 5 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	19.56	18.0390

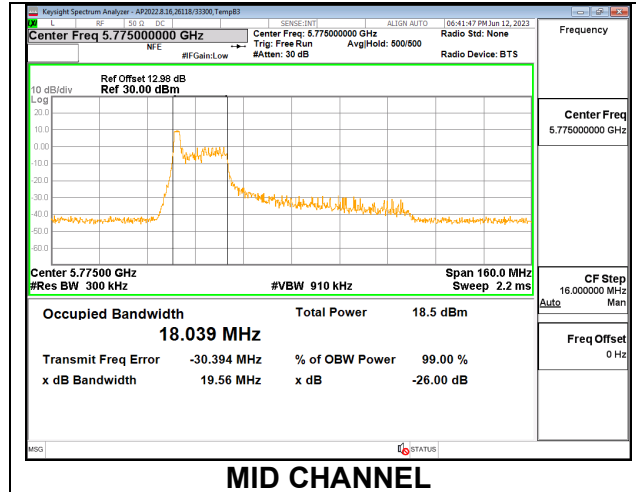


1TX Antenna 5 MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	39.57	37.2940

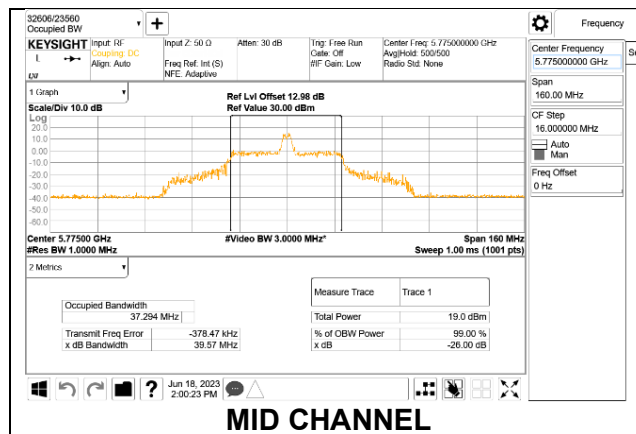


1TX Antenna 5 MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	20.02	18.7370

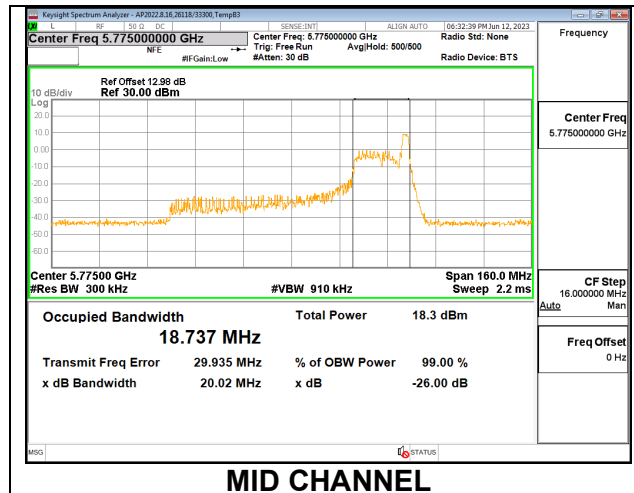


1TX Antenna 5 MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Mid	5775	81.52	77.2370

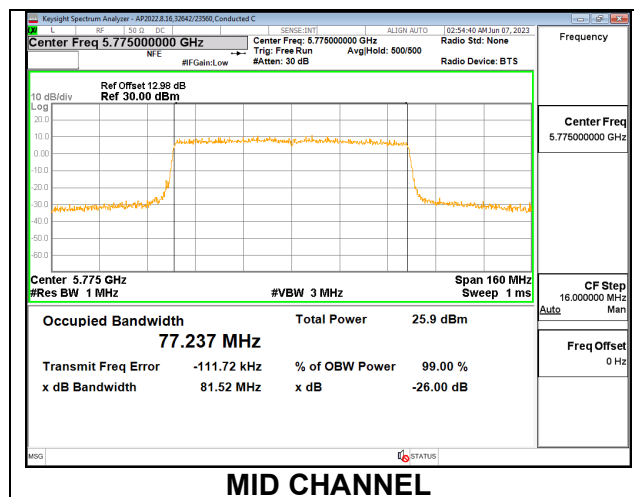


2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	19.64	19.39	18.1120	17.9800

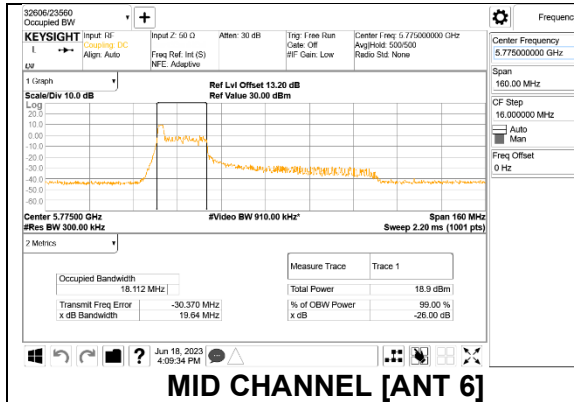


MID CHANNEL [ANT 6]

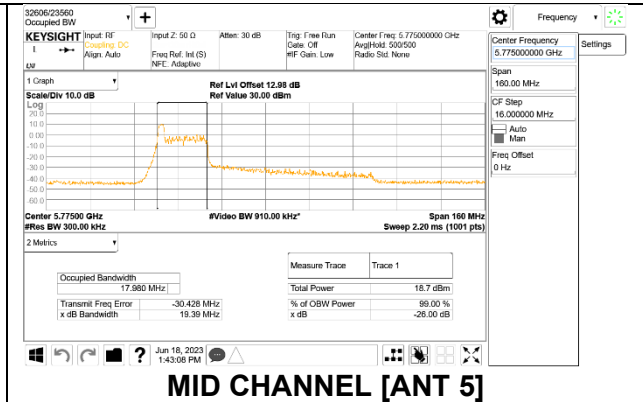


MID CHANNEL [ANT 5]

2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 18

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	40.15	38.74	37.2180	36.3350

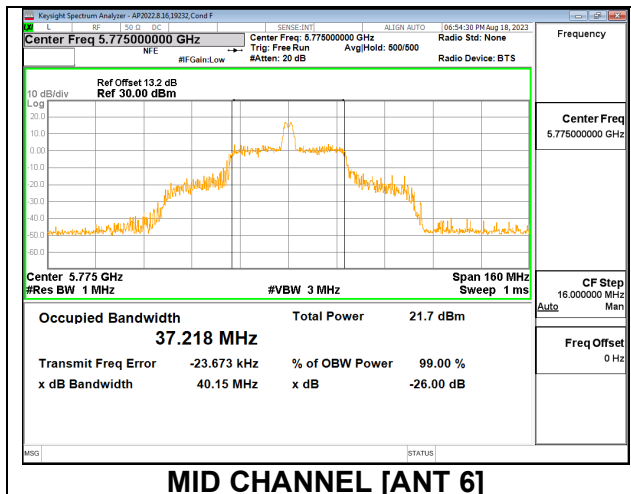



MID CHANNEL [ANT 6]

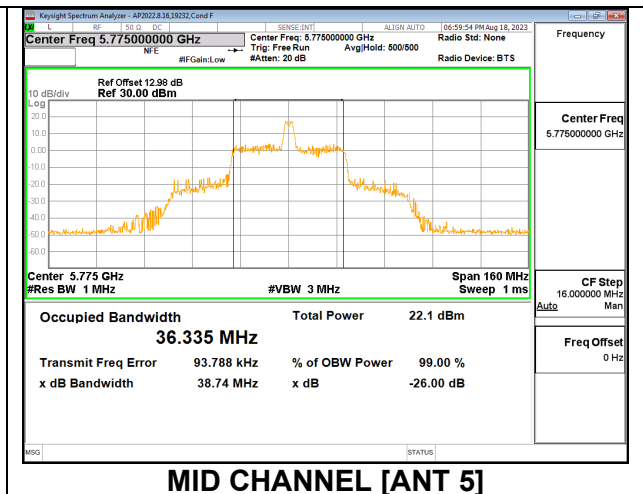

MID CHANNEL [ANT 5]



2TX Antenna 6 + Antenna 5 CDD MODE: 26 Tones, RU Index 36

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	20.19	19.37	18.7100	18.0000

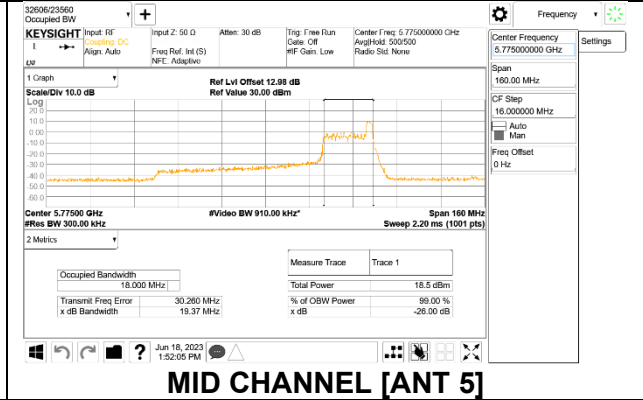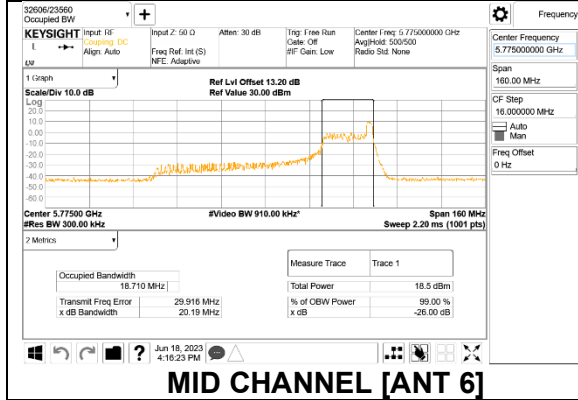

2TX Antenna 6 + Antenna 5 CDD MODE: SU Mode

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 6 (MHz)	26 dB Bandwidth Antenna 5 (MHz)	99% Bandwidth Antenna 6 (MHz)	99% Bandwidth Antenna 5 (MHz)
Mid	5775	81.90	80.89	77.3770	77.4160

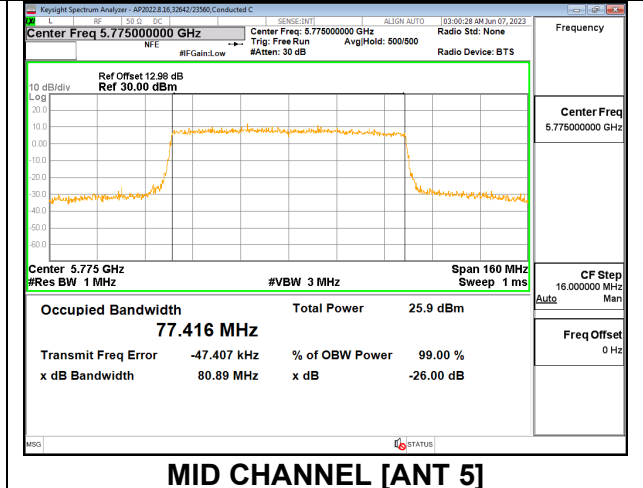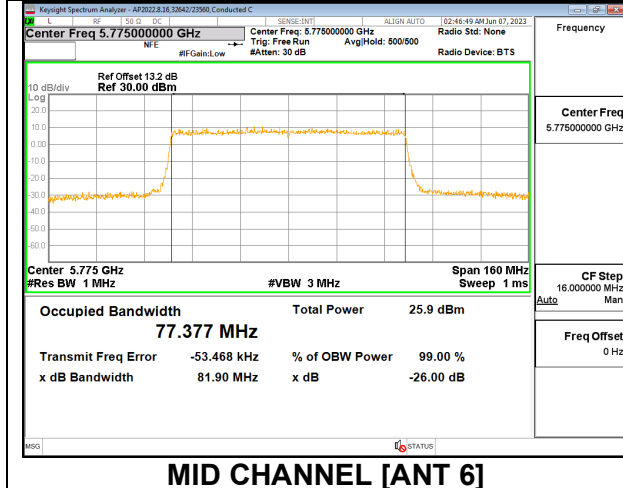

9.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

RSS-247 6.2.4.1


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

9.3.1. 802.11n HT20 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	15.412	0.5
Mid	5785	17.580	0.5
High	5825	17.616	0.5
144	5720	3.864	0.5

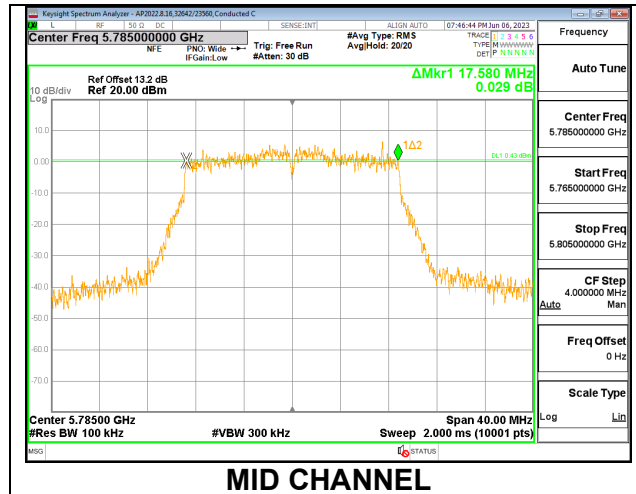


1TX Antenna 5 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.588	0.5
Mid	5785	17.592	0.5
High	5825	17.292	0.5
144	5720	3.760	0.5

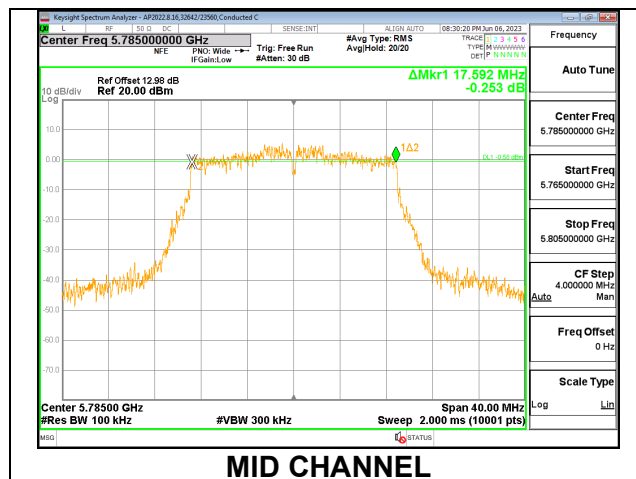


2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	6 dB Bandwidth Antenna 6 (MHz)	6 dB Bandwidth Antenna 5 (MHz)	Minimum Limit (MHz)
Low	5745	16.544	17.584	0.5
Mid	5785	16.040	17.540	0.5
High	5825	17.592	17.596	0.5
144	5720	3.756	3.820	0.5

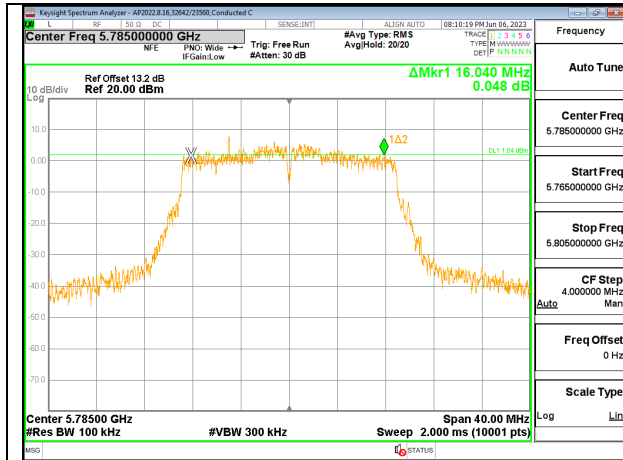

MID CHANNEL [ANT 6]

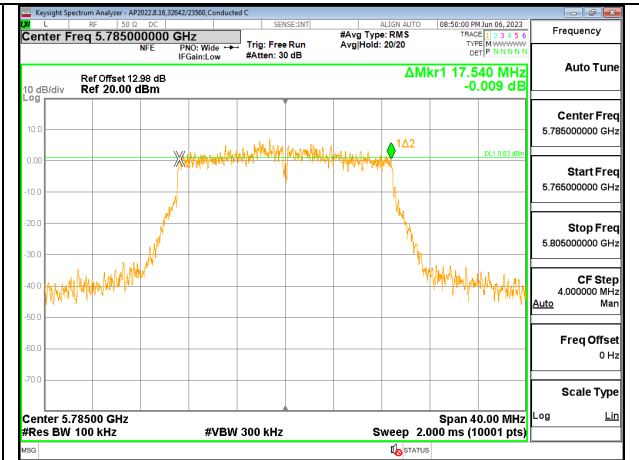


MID CHANNEL [ANT 5]

9.3.2. 802.11n HT40 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	35.328	0.5
High	5795	36.296	0.5
142	5710	3.280	0.5

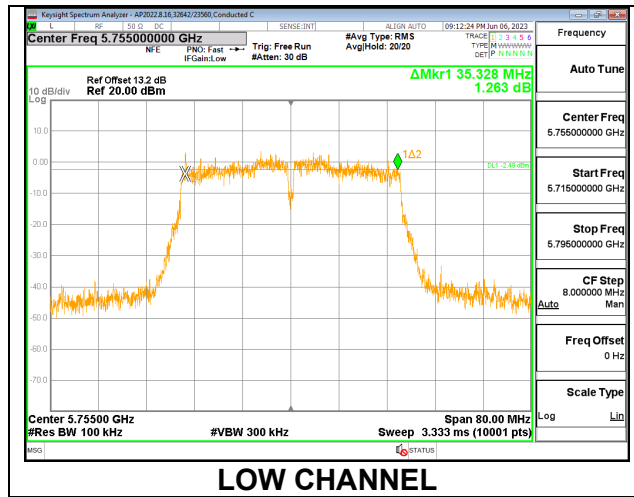



1TX Antenna 5 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	35.920	0.5
High	5795	36.064	0.5
142	5710	3.176	0.5

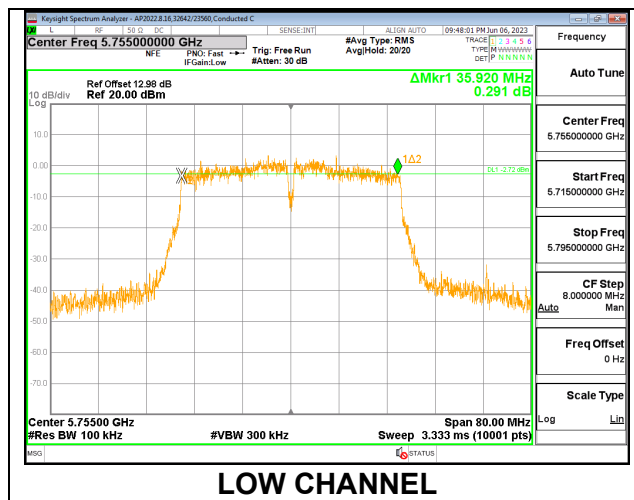

2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	6 dB Bandwidth Antenna 6 (MHz)	6 dB Bandwidth Antenna 5 (MHz)	Minimum Limit (MHz)
Low	5755	32.608	35.936	0.5
High	5795	33.888	35.304	0.5
142	5710	2.928	3.080	0.5

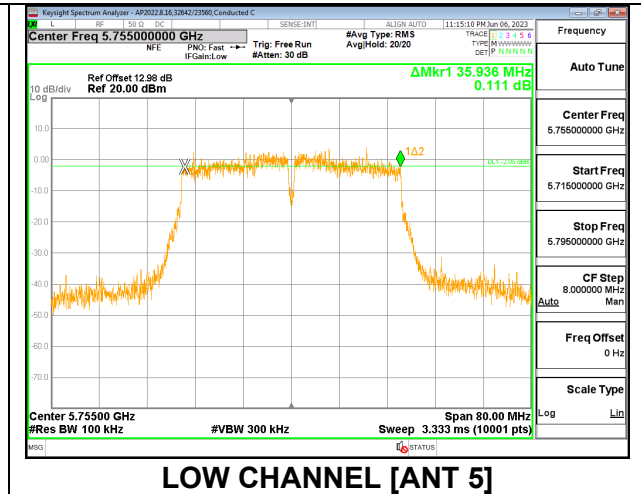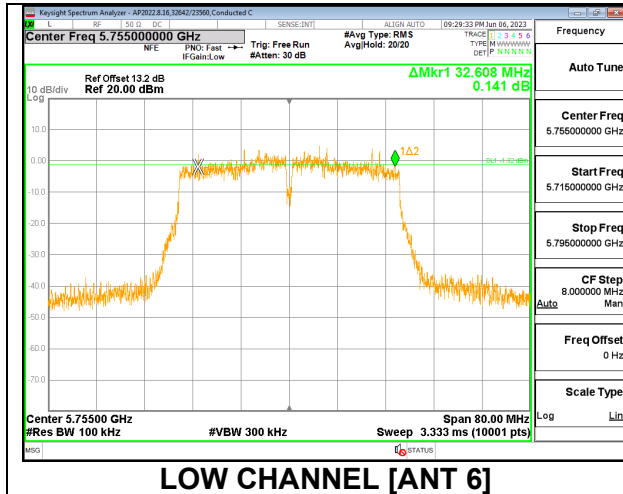

9.3.3. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	71.296	0.5
138	5690	3.256	0.5

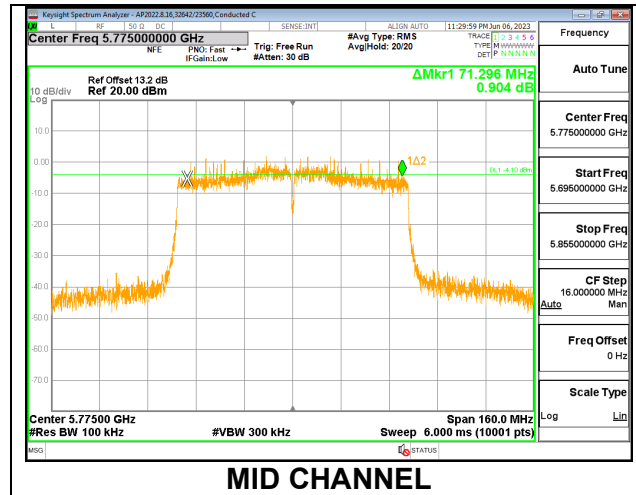



1TX Antenna 5 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	71.376	0.5
138	5690	2.568	0.5

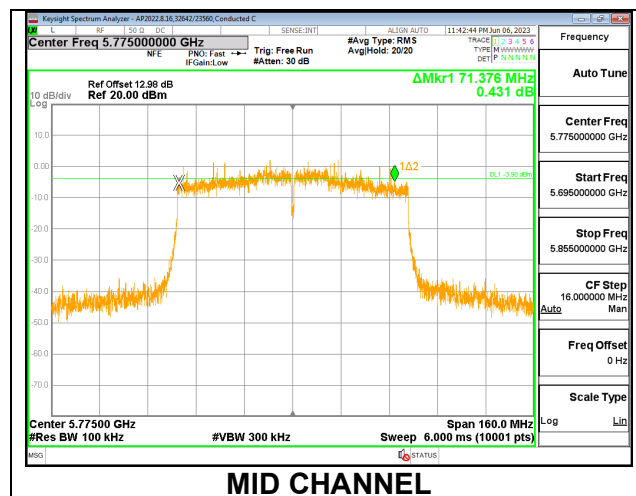

2TX Antenna 6 + Antenna 5 CDD MODE


Channel	Frequency (MHz)	6 dB Bandwidth Antenna 6 (MHz)	6 dB Bandwidth Antenna 5 (MHz)	Minimum Limit (MHz)
Mid	5775	73.968	73.856	0.5
138	5690	3.128	3.224	0.5

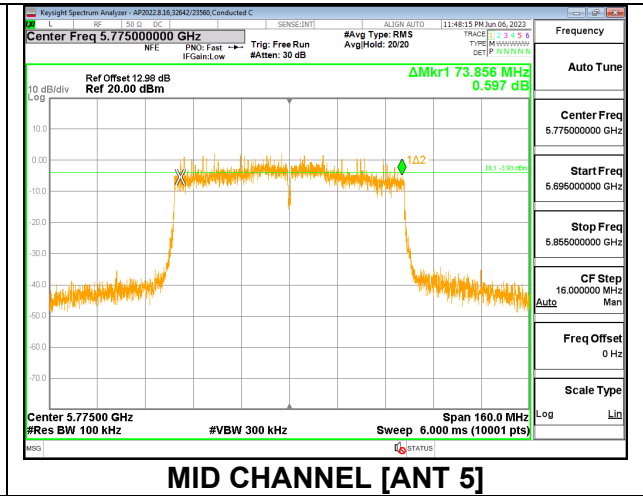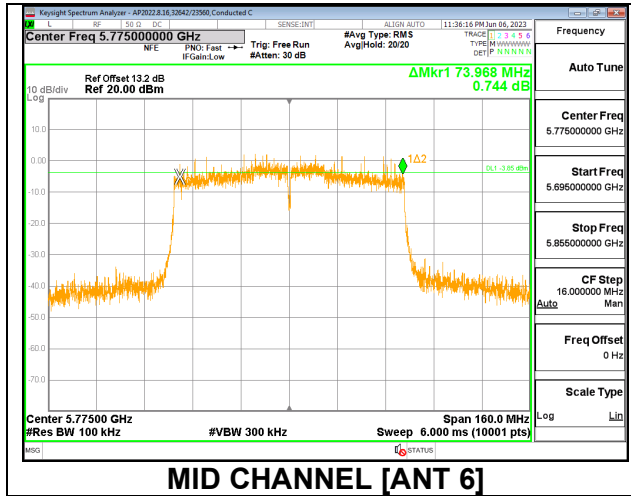

9.3.4. 802.11ax HE20 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE: 26 Tones, RU Index 0

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.008	0.5
Mid	5785	1.964	0.5
High	5825	1.996	0.5

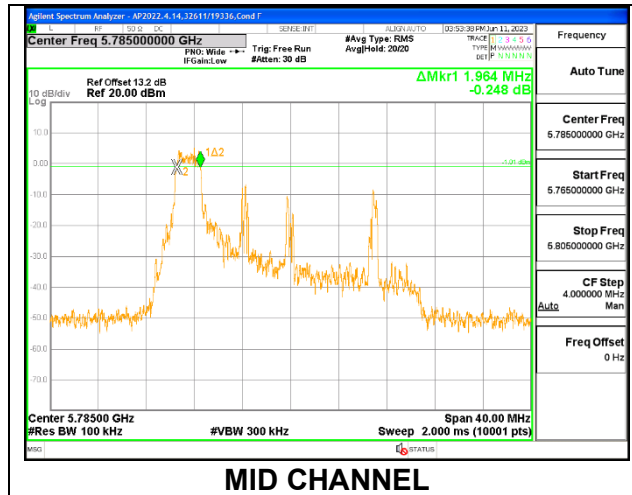


1TX Antenna 6 MODE: 26 Tones, RU Index 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.576	0.5
Mid	5785	2.604	0.5
High	5825	2.620	0.5

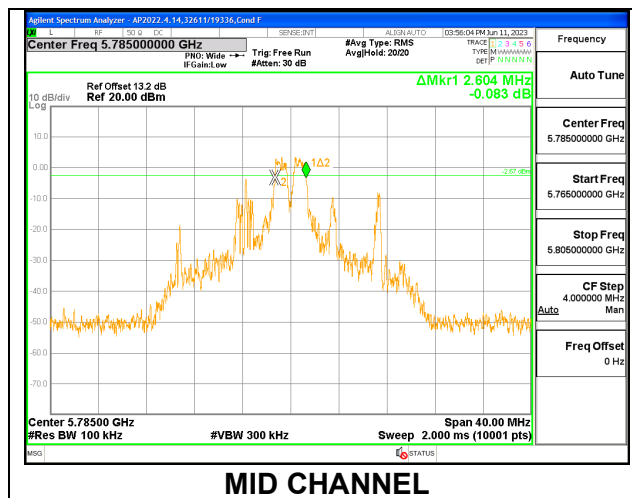


1TX Antenna 6 MODE: 26 Tones, RU Index 8

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.036	0.5
Mid	5785	2.084	0.5
High	5825	2.000	0.5

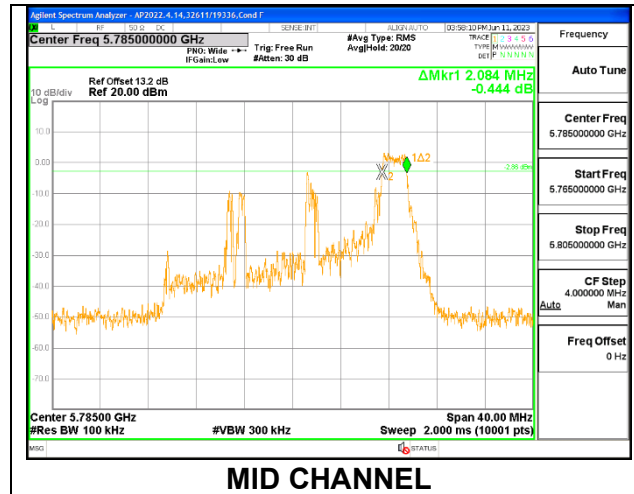

1TX Antenna 6 MODE: 106 Tones, RU Index 54

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
5720	4.484	0.5

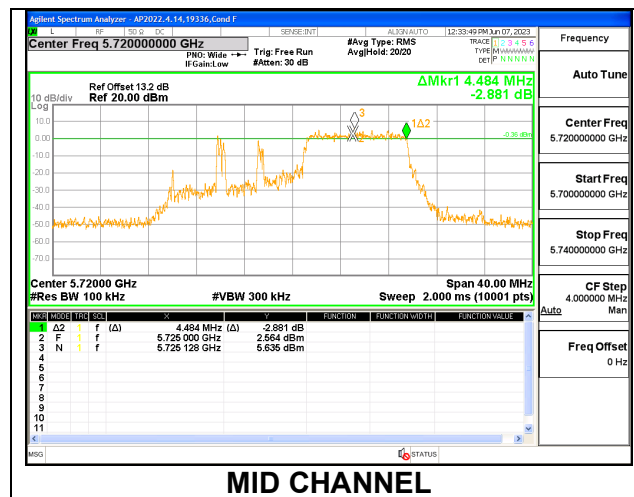

1TX Antenna 6 MODE: SU Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	15.688	0.5
Mid	5785	15.640	0.5
High	5825	16.544	0.5
144	5720	4.572	0.5

