



**Part 0: SAR and Power Density Characterization  
EUT RF Exposure Compliance Test Report**

*For*  
**SMARTPHONE**

**FCC ID: BCG-E8435A  
Model Name: A2848**

**Report Number: 14523740-S4V3  
Issue Date: 8/3/2023**

*Prepared for*  
**APPLE INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014-2084**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888**

**Revision History**

Rev.	Date	Revisions	Revised By
V1	7/22/2023	Initial Issue	--
V2	7/27/2023	1. Updated Table 4-3 with the correct $P_{max}$ values	Nathan Sousa
V3	8/3/2023	1. Removed n79 from the report	Nathan Sousa

**Table of Contents**

**1. Attestation of Test Results .....4**

**2. Facilities and Accreditation .....5**

**3. Introduction .....5**

**4. SAR Characterization .....5**

    4.1. *Worst-case SAR Determination* ..... 5

    4.2. *Usage Scenarios in SAR Evaluation* ..... 7

    4.3. *SAR<sub>Design Target</sub>* ..... 7

    4.4. *SAR Characterization* ..... 8

**5. Power Density Characterization .....10**

    5.1. *Exposure Scenarios in PD Evaluation* ..... 11

    5.2. *PD Characterization Overview*..... 11

    5.3. *EUT Codebook*..... 12

    5.4. *Simulation and modeling validation* ..... 14

        5.4.1. *Modeling for Simulation* ..... 14

        5.4.2. *Modeling Validation*..... 14

        5.4.3. *Simulation for power density* ..... 17

    5.5. *PD<sub>Design Target</sub>* ..... 17

    5.6. *Worst-case Housing Influence Determination* ..... 18

    5.7. *PD Characterization*..... 18

        5.7.1. *Scaling Factor for Single Beams*..... 18

        5.7.2. *Scaling Factor for Beam Pairs* ..... 19

        5.7.3. *Input Power Limit* ..... 19

**A Worst Phase Derivation for Beam Pair .....25**

**B Simulated Input Power Limit.....26**

**Figures**

**Figure 4-1: SAR evaluation for smartphone application .....6**

**Figure 4-2: Worst-case SAR determination based on DSI.....6**

**Figure 5-1: EUT surface definition ..... 11**

**Figure 5-2 High level flow chart for power density characterization ..... 12**

**Tables**

**Table 4-1: Usage/Exposure Scenario .....7**

**Table 4-2: Worst-case *reported* SAR ..... 8**

**Table 4-3: SAR Characterization ..... 9**

**Table 5-1: EUT Codebook ..... 12**

**Table 5-2: Beams and surfaces selection for PD correlation ..... 15**

**Table 5-3: Measured and simulated 4cm<sup>2</sup> averaged PD for selected beams with 6 dBm input power for n258, n260, and n261 ..... 16**

**Table 5-4: PD evaluation plane ..... 17**



**Table 5-5:  $\Delta_{min}$  for M2, M1 and M3 ..... 18**

**Table 5-6: *input.power.limit* calculation ..... 20**

**Table 5-7: PD Characterization ..... 21**

**Table B-1: Simulated *input.power.limit* for n258, n260, and n261 ..... 26**

### 1. Attestation of Test Results

Applicant Name	APPLE INC.							
FCC ID	BCG-E8435A							
Model Name	A2848							
Reference SAR Report	14523740-S1							
Exposure Category	SAR Limits (W/Kg)						PD Limits (W/m <sup>2</sup> )	
	Peak spatial-average (1g of tissue)			Extremities (hands, wrists, ankles, etc.) (10g of tissue)				
General Population (Uncontrolled Exposure)	1.6			4			10	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)						Highest Reported PD (W/m <sup>2</sup> )	
	TNE	PCE	CBE	DTS	NII	DSS	DXX	
Head	0.840	0.948	0.939	1.139	1.099	0.635	N/A	
Body-worn (Dist.= 5 mm)	0.915	0.949	0.948	1.116	1.159	0.759	N/A	
Hotspot (Dist.= 5 mm)	0.915	0.950	0.948	1.118	1.159	0.759	N/A	
Extremities (Dist.= 0 mm)	N/A	N/A	N/A	N/A	N/A	N/A	0.005	
Simultaneous TX	Head	1.246	1.404	1.345	1.338	1.404	1.404	N/A
	Body-worn	1.469	1.502	1.502	1.511	1.555	1.555	N/A
	Hotspot	1.469	1.502	1.502	1.511	1.555	1.555	N/A
Date Tested	5/24/2023 to 7/20/2023							
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. Government, or any agency of the U.S. government.</p>								
Approved & Released By:				Prepared By:				
								
Dave Weaver Operations Leader UL Verification Services Inc.				Nathan Sousa Senior Laboratory Engineer UL Verification Services Inc.				

## 2. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

47173 Benicia Street	47266 Benicia Street
SAR Labs A to H	SAR Labs 1 to 19

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05

## 3. Introduction

The equipment under test (EUT) is a smart phone. It contains the Qualcomm modem supporting 2G/3G/4G/5G WWAN technologies and millimeter wave 5G NR bands. These WWAN modems enable Qualcomm’s Smart Transmit feature to control and manage transmitting power, in real time, and to ensure the time-averaged RF exposure is always in compliance with the FCC requirement.

In this report, Part 0, the EUT SAR and power density (PD) are characterized for WWAN radios (2G/3G/4G/5G/ millimeter wave 5G NR) to determine the power limit that corresponds to the exposure design target after accounting for all device design related uncertainties, i.e., SAR<sub>Design Target</sub> (< FCC SAR limit) for Sub-6 GHz radio and PD<sub>Design Target</sub> (< FCC PD limit) for millimeter wave radio. The SAR Characterization and PD Characterization are denoted as SAR Char and PD Char.

SAR Char and PD Char will be used as input for Qualcomm Smart Transmit to operate. Both SAR Char and PD Char will be loaded and stored in the EUT via the Embedded File System (EFS).


The EUT supports WLAN/BT/MSS radio(s) as well, but the WLAN/BT/MSS modem is not enabled with Qualcomm’s Smart Transmit feature.

## 4. SAR Characterization

SAR Char is generated to cover all radio configurations and usage scenarios that are reported in the initial FCC submission.

### 4.1. Worst-case SAR Determination


Based on FCC KDBs, in general, for a smartphone, the SAR evaluation is required for the exposure scenarios shown in Figure 4-1.

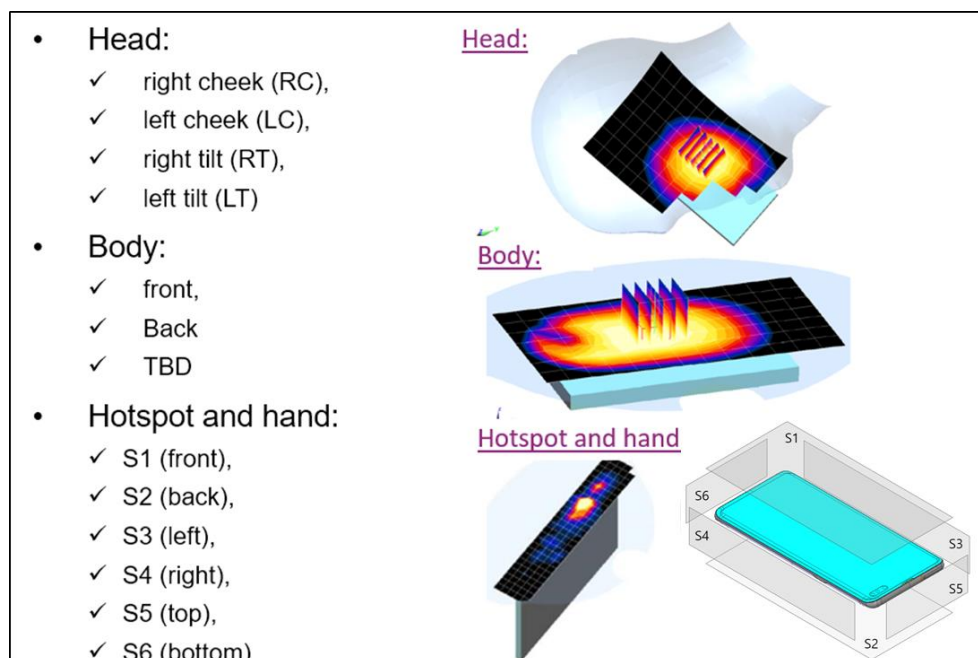

**Figure 4-1: SAR evaluation for smartphone application**

The *Device State Index* (DSI) used in Figure 4-2 represents each exposure scenario. Depending on the detection scheme implemented in the smartphone, the worst-case SAR is further grouped and determined for each or combined exposure scenario(s). Note, for the 1-g SAR versus 10-g SAR exposure scenario, the worst-case is determined in term of exposure ratio (i.e., exposure level relative to the corresponding 1-g or 10-g SAR limit).

- If the device does not have any detection mechanism (**all “no”** in Figure 4-2), then the worst-case SAR is determined by taking the maximum SAR value among all exposure scenarios, i.e., worst-case SAR =  $\max\{SAR_{head}, SAR_{body}, SAR_{hotspot/extremity}\}$
- If the device can distinguish each of the above scenarios (**all “yes”** in Figure 4-2), then the worst-case SAR for each individual exposure scenario is given by corresponding  $SAR_{head}$ ,  $SAR_{body}$ , and  $SAR_{hotspot/extremity}$
- If the device can only distinguish a subset of the scenarios (**some “yes”, some “no”** in Figure 4-2), then the worst-case SAR is given by:
  - Corresponding SAR for each exposure scenario that can be distinguished (DSI=yes)
  - Worst-case SAR among all other exposure scenario(s) that cannot be distinguished (DSI=no)

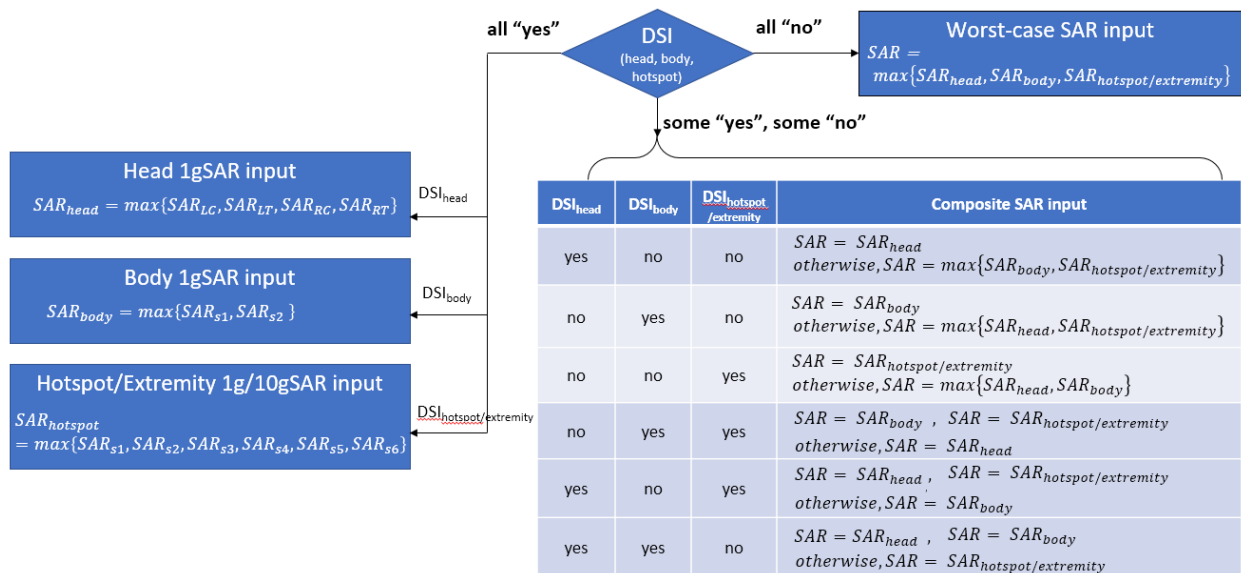

**Figure 4-2: Worst-case SAR determination based on DSI**

## 4.2. Usage Scenarios in SAR Evaluation

The EUT has a detection mechanism to distinguish Head, Body-worn, and Hotspot exposure conditions, which is represented using *DSI* 0 and 1. These *DSI* states were used to determine the power limit for Smart Transmit to operate; where the exposure scenario is managed as the same *DSI* state, all other exposures which cannot be distinguished, in this particular instance and based on the worst-case SAR determination criteria described in §4.1, the maximum SAR (or the minimum  $P_{limit}$ ) among all remaining exposure scenarios (i.e., Body-worn 1-g SAR evaluation at a specified test separation distance, phablet extremity 10-g SAR evaluation at a specified test separation distance, and maximum RF tune-up power ( $P_{max}$ ) supported by the device if SAR measurement is not performed for this tech/band/antenna because of meeting SAR test exclusion criteria) is used to determine the power limit for Smart Transmit to operate.

The corresponding usage scenarios supported by EUT are summarized in Table 4-1:

**Table 4-1: Usage/Exposure Scenario**

Scenario	DSI State	Description	SAR Definition	Worst-case SAR
Head	0	<ul style="list-style-type: none"> <li>Device positioned next to head</li> <li>1-g SAR evaluated in four positions (left/right touch/tilt)</li> </ul>	$SAR_{head} = \max \{SAR_{LC}, SAR_{LT}, SAR_{RC}, SAR_{RT}\}$	$SAR_{head}$
Body-worn/Hotspot	1	<ul style="list-style-type: none"> <li>Device transmits in Hotspot mode and assumed to be located next to human body</li> <li>1-g SAR is evaluated for all six surfaces of the EUT (S1-S6 as shown in Figure 3-1) at 10 mm test separation distance relative to the flat phantom</li> </ul>	$SAR_{hotspot} = \max \{SAR_{s1}, SAR_{s2}, SAR_{s3}, SAR_{s4}, SAR_{s5}, SAR_{s6}\}$	$SAR_{body}$

## 4.3. SAR<sub>Design Target</sub>

The total device design and related uncertainties of the EUT, including TxAGC and device to device variation, are accounted for in the SAR design Target ( $SAR_{Design Target}$ ) per the following equation:

$$SAR_{Design Target} < SAR_{regulatorylimit} \times 10^{\frac{-total\ uncertainty}{10}}$$

For the FCC SAR requirement of 1.6 W/kg and 4.0 W/kg, 1-g and 10-g SAR respectively, the  $SAR_{Design Target}$  for the EUT is determined as:

SAR <sub>Design Target</sub> (1-g W/kg)	SAR <sub>Design Target</sub> (10-g W/kg)	SAR <sub>Design Limit</sub> (1-g W/kg)	SAR <sub>Design Limit</sub> (10-g W/kg)
0.8	2.0	1.0	2.5

## 4.4. SAR Characterization

Referring to the initial FCC submission, the worst-case *reported* SAR for each antenna/technology/band/DSI is summarized in Table 4-2:

**Table 4-2: Worst-case reported SAR**

Tech/Band	Antenna			Worst-case SAR (W/kg)			$P_{limit}$ (dBm) + Uncertainty (dBm)		
	Head	Body & Hotspot	Hotspot	Head	Body & Hotspot	Hotspot	Head	Body & Hotspot	Hotspot
	DSI: 0	DSI: 1	DSI: 1	DSI: 0	DSI: 1	DSI: 1	DSI: 0	DSI: 1	DSI: 1
GSM 850 2 slots	ANT 2	ANT 1	ANT 1	0.333	0.494	0.768	30.50	32.50	32.50
GSM 1900 2 slots	ANT 4	ANT 4	ANT 1	0.948	0.929	0.944	26.60	27.70	26.80
W-CDMA B2	ANT 4	ANT 4	ANT 2	0.936	0.945	0.946	19.80	20.40	19.50
W-CDMA B4	ANT 4	ANT 3	ANT 2	0.914	0.938	0.950	19.80	22.30	20.00
W-CDMA B5	ANT 2	ANT 1	ANT 1	0.755	0.905	0.905	24.50	25.70	25.70
LTE Band 5	ANT 2	ANT 2	ANT 2	0.908	0.916	0.916	24.50	24.70	24.70
LTE Band 7	ANT 4	ANT 2	ANT 1	0.941	0.942	0.944	20.00	19.90	22.00
LTE Band 12/17	ANT 2	ANT 3	ANT 1	0.798	0.569	0.760	24.70	25.40	25.70
LTE Band 13	ANT 2	ANT 2	ANT 1	0.821	0.704	0.832	24.50	24.50	25.70
LTE Band 14	ANT 2	ANT 2	ANT 1	0.780	0.730	0.890	24.50	24.50	25.70
LTE Band 25/2	ANT 2	ANT 3	ANT 3	0.944	0.941	0.941	20.60	21.90	21.90
LTE Band 26	ANT 2	ANT 2	ANT 2	0.879	0.866	0.866	24.50	24.70	24.70
LTE Band 30	ANT 2	ANT 3	ANT 2	0.943	0.907	0.938	22.30	20.20	22.00
LTE Band 41	ANT 2	ANT 2	ANT 1	0.930	0.924	0.941	20.50	21.50	22.80
LTE Band 48	ANT 8	ANT 9	ANT 9	0.939	0.943	0.943	20.40	20.90	20.90
LTE Band 53	ANT 2	ANT 2	ANT 2	0.666	0.723	0.723	20.00	20.70	20.70
LTE Band 66/4	ANT 4	ANT 3	ANT 1	0.933	0.946	0.948	20.80	22.10	19.50
LTE Band 71	ANT 2	ANT 3	ANT 3	0.656	0.628	0.628	24.70	25.40	25.40
MSS	N/A	ANT 1	ANT 4	N/A	0.596	0.739	N/A	20.00	21.50
NR n5	ANT 2	ANT 2	ANT 2	0.737	0.785	0.785	24.50	24.70	24.70
NR n7	ANT 4	ANT 1	ANT 1	0.940	0.944	0.944	20.40	22.20	22.20
NR n12	ANT 2	ANT 3	ANT 1	0.614	0.560	0.645	24.70	25.40	25.70
NR n14	ANT 2	ANT 2	ANT 1	0.831	0.689	0.876	24.50	24.50	25.70
NR n25/2	ANT 4	ANT 4	ANT 4	0.925	0.936	0.936	21.10	21.70	21.70
NR n26	ANT 2	ANT 2	ANT 2	0.845	0.844	0.844	24.50	24.70	24.70
NR n30	ANT 4	ANT 2	ANT 4	0.948	0.929	0.948	21.50	23.00	20.00
NR n41	ANT 4	ANT 2	ANT 2	0.935	0.949	0.950	20.10	19.50	19.50
NR n48	ANT 8	ANT 9	ANT 9	0.916	0.948	0.948	18.40	18.90	18.90
NR n53	ANT 2	ANT 2	ANT 2	0.840	0.915	0.915	19.00	19.60	19.60
NR n66	ANT 4	ANT 3	ANT 1	0.933	0.903	0.945	21.00	22.50	19.40
NR n70	ANT 2	ANT 3	ANT 1	0.929	0.936	0.943	21.00	23.50	19.90
NR n71	ANT 2	ANT 2	ANT 2	0.751	0.601	0.601	24.70	24.70	24.70
NR n77	ANT 4	ANT 9	ANT 9	0.931	0.940	0.940	21.00	17.40	17.40

Using the reported SAR listed in Table 4-2, and following the procedure described in §4.1, the *SAR Char* of this EUT, i.e.,  $P_{limit}$  corresponding to  $SAR_{Design\ Target}$ , is determined for each supported antenna/technology/band/DSI as:

1. For DSI = 0,  $P_{limit}$  is calculated based on 1-g SAR head evaluation.
2. For DSI = 1,  $P_{limit}$  is calculated based on 1-g SAR body-worn/hotspot exposure evaluation at 5 mm spacing.

$$P_{limit} = \min\{P_{limit} \text{ corresponding to body worn 1gSAR evaluation at 15mm spacing, } P_{limit} \text{ corresponding to 10-g SAR extremity evaluation at 0mm spacing, } P_{max} \text{ maximum RF tuneup power for the case that the SAR test is excluded}\}$$



The SAR Char is listed in Table 4-3.

**Table 4-3: SAR Characterization**

Exposure Scenario		Spatial-average	Test Distance	Power Mode (DS)	Duty Cycle	Head				Body & Hotspot				Hotspot				P <sub>max</sub> (dBm)
						1-g		0 mm		1-g		5 mm		1-g		5 mm		
Antenna	Tech/Band					DS: 0				DS: 1				DS: 1				
						P <sub>avg</sub> (dBm)	P <sub>avg</sub> + Uncertainty (dBm)	P <sub>avg</sub> (dBm)	P <sub>avg</sub> + Uncertainty (dBm)	P <sub>avg</sub> (dBm)	P <sub>avg</sub> + Uncertainty (dBm)	P <sub>avg</sub> (dBm)	P <sub>avg</sub> + Uncertainty (dBm)	P <sub>avg</sub> (dBm)	P <sub>avg</sub> + Uncertainty (dBm)	P <sub>avg</sub> (dBm)	P <sub>avg</sub> + Uncertainty (dBm)	
		Burst Average		Frame Average		Burst Average		Frame Average		Burst Average		Frame Average		Burst Average		Frame Average		
ANT 1	GSM 850 2 slots	25.0%	39.72	32.50	33.70	26.48	35.34	32.50	29.32	26.48	33.43	32.50	27.41	26.48	32.50	26.48		
	GSM 1900 2 slots	25.0%	38.19	31.00	32.17	24.98	29.63	26.80	23.61	20.78	26.83	26.80	20.81	20.78	31.00	24.98		
	W-CDMA B2	100.0%	31.19	25.70	31.19	25.70	21.86	19.20	21.86	19.20	19.24	19.20	19.24	19.20	25.70	25.70		
	W-CDMA B4	100.0%	32.50	25.30	32.50	25.30	21.48	19.30	21.48	19.30	19.34	19.30	19.34	19.30	25.70	25.70		
	W-CDMA B5	100.0%	33.19	25.70	33.19	25.70	25.91	25.70	25.91	25.70	25.91	25.70	25.91	25.70	25.70	25.70		
	LTE Band 5	100.0%	32.72	25.70	32.72	25.70	27.33	25.70	27.33	25.70	27.33	25.70	27.33	25.70	25.70	25.70		
	LTE Band 7	100.0%	24.74	20.00	24.74	20.00	22.36	22.00	22.36	22.00	22.03	22.00	22.03	22.00	25.70	25.70		
	LTE Band 12/17	100.0%	33.45	25.70	33.45	25.70	29.53	25.70	29.53	25.70	26.67	25.70	26.67	25.70	25.70	25.70		
	LTE Band 13	100.0%	31.90	25.70	31.90	25.70	28.36	25.70	28.36	25.70	26.27	25.70	26.27	25.70	25.70	25.70		
	LTE Band 14	100.0%	32.50	25.70	32.50	25.70	28.43	25.70	28.43	25.70	25.98	25.70	25.98	25.70	25.70	25.70		
	LTE Band 25/2	100.0%	31.57	25.70	31.57	25.70	22.30	19.50	22.30	19.50	19.59	19.50	19.59	19.50	25.70	25.70		
	LTE Band 26	100.0%	33.04	25.70	33.04	25.70	26.88	25.70	26.88	25.70	26.88	25.70	26.88	25.70	25.70	25.70		
	LTE Band 30	100.0%	34.62	25.70	34.62	25.70	24.57	24.30	24.57	24.30	24.37	24.30	24.37	24.30	25.70	25.70		
	LTE Band 41	63.3%	34.07	25.70	32.09	23.71	24.43	22.80	22.45	20.81	22.84	22.80	20.86	20.81	25.70	23.71		
	LTE Band 41 (PC2)	43.3%	35.21	26.10	31.57	24.46	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	26.10	24.46		
	LTE Band 53	63.3%	33.02	20.70	31.03	18.71	25.41	20.70	23.42	18.71	24.61	20.70	22.63	18.71	20.70	18.71		
	LTE Band 66/4	100.0%	31.45	25.30	31.45	25.30	21.32	19.50	21.32	19.50	19.51	19.50	19.51	19.50	25.70	25.70		
	LTE Band 71	100.0%	31.97	25.70	31.97	25.70	28.56	25.70	28.56	25.70	27.90	25.70	27.90	25.70	25.70	25.70		
	MSS	100.0%	N/A	N/A	N/A	N/A	22.02	20.00	22.02	20.00	21.10	20.00	21.10	20.00	28.00	28.00		
	NR n5	100.0%	32.10	25.70	32.10	25.70	27.25	25.70	27.25	25.70	27.25	25.70	27.25	25.70	25.70	25.70		
	NR n7	100.0%	23.92	20.00	23.92	20.00	22.23	22.20	22.23	22.20	22.23	22.20	22.23	22.20	25.70	25.70		
	NR n12	100.0%	33.50	25.70	33.50	25.70	29.40	25.70	29.40	25.70	27.38	25.70	27.38	25.70	25.70	25.70		
	NR n14	100.0%	31.71	25.70	31.71	25.70	28.16	25.70	28.16	25.70	26.05	25.70	26.05	25.70	25.70	25.70		
	NR n25/2	100.0%	31.29	25.70	31.29	25.70	21.32	19.50	21.32	19.50	19.51	19.50	19.71	19.50	25.70	25.70		
	NR n26	100.0%	32.70	25.70	32.70	25.70	27.31	25.70	27.31	25.70	27.31	25.70	27.31	25.70	25.70	25.70		
	NR n30	100.0%	34.81	25.20	34.81	25.20	25.80	24.30	25.80	24.30	24.39	24.30	24.39	24.30	25.70	25.70		
	NR n41	100.0%	30.46	24.50	30.46	24.50	21.16	20.80	21.16	20.80	20.95	20.80	20.95	20.80	25.70	25.70		
	NR n53	100.0%	30.35	18.70	30.35	18.70	22.66	18.70	22.66	18.70	21.79	18.70	21.79	18.70	20.70	20.70		
	NR n66	100.0%	31.05	25.30	31.05	25.30	21.58	19.40	21.58	19.40	19.42	19.40	19.42	19.40	25.70	25.70		
	NR n70	100.0%	32.48	25.30	32.48	25.30	21.24	19.90	21.24	19.90	19.93	19.90	19.93	19.90	25.70	25.70		
	NR n71	100.0%	34.01	25.70	34.01	25.70	28.10	25.70	28.10	25.70	28.10	25.70	28.10	25.70	25.70	25.70		
	ANT 2	GSM 850 2 slots	25.0%	35.05	30.50	29.03	24.48	35.60	31.30	29.57	25.28	35.60	31.30	29.57	25.28	31.50	25.48	
		GSM 1900 2 slots	25.0%	27.28	27.20	21.26	21.18	26.81	25.70	20.79	19.68	26.73	25.70	20.79	19.68	28.50	22.48	
		W-CDMA B2	100.0%	20.19	20.10	20.19	20.10	19.96	19.50	19.96	19.50	19.52	19.50	19.52	19.50	23.40	23.40	
		W-CDMA B4	100.0%	20.23	19.90	20.23	19.90	22.09	20.00	22.09	20.00	20.00	20.00	20.00	20.00	23.40	23.40	
W-CDMA B5		100.0%	25.50	24.50	25.50	24.50	25.76	24.70	25.76	24.70	25.76	24.70	25.76	24.70	24.70	24.70		
LTE Band 5		100.0%	24.70	24.50	24.70	24.50	24.86	24.70	24.86	24.70	24.86	24.70	24.86	24.70	24.70	24.70		
LTE Band 7		100.0%	19.41	19.30	19.41	19.30	19.94	19.90	19.94	19.90	19.94	19.90	19.94	19.90	23.70	23.70		
LTE Band 12/17		100.0%	25.46	24.70	25.46	24.70	27.82	24.70	27.82	24.70	27.82	24.70	27.82	24.70	24.70	24.70		
LTE Band 13		100.0%	25.13	24.50	25.13	24.50	25.80	24.50	25.80	24.50	25.80	24.50	25.80	24.50	24.70	24.70		
LTE Band 14		100.0%	25.36	24.50	25.36	24.50	25.64	24.50	25.64	24.50	25.64	24.50	25.64	24.50	24.70	24.70		
LTE Band 25/2		100.0%	20.63	20.60	20.63	20.60	20.80	20.10	20.80	20.10	20.16	20.10	20.16	20.10	23.40	23.40		
LTE Band 26		100.0%	24.83	24.50	24.83	24.50	25.10	24.70	25.10	24.70	25.10	24.70	25.10	24.70	24.70	24.70		
LTE Band 30		100.0%	22.33	22.30	22.33	22.30	23.79	22.00	23.79	22.00	22.06	22.00	22.06	22.00	23.70	23.70		
LTE Band 41		63.3%	20.59	20.50	18.61	18.51	21.62	21.50	19.63	19.51	21.62	21.50	19.63	19.51	25.70	23.71		
LTE Band 53		63.3%	21.54	20.00	19.55	18.01	21.88	20.70	19.90	18.71	21.88	20.70	19.90	18.71	20.70	18.71		
LTE Band 66/4		100.0%	20.10	20.00	20.10	20.00	21.75	19.40	21.75	19.40	19.52	19.40	19.52	19.40	25.70	25.70		
LTE Band 71		100.0%	26.31	24.70	26.31	24.70	26.50	24.70	26.50	24.70	26.50	24.70	26.50	24.70	24.70	24.70		
NR n5		100.0%	25.60	24.50	25.60	24.50	25.53	24.70	25.53	24.70	25.53	24.70	25.53	24.70	24.70	24.70		
NR n7		100.0%	18.64	18.50	18.64	18.50	19.67	19.50	19.67	19.50	19.57	19.50	19.57	19.50	23.70	23.70		
NR n12		100.0%	26.60	24.70	26.60	24.70	27.73	24.70	27.73	24.70	27.73	24.70	27.73	24.70	24.70	24.70		
NR n14		100.0%	25.08	24.50	25.08	24.50	25.90	24.50	25.90	24.50	25.90	24.50	25.90	24.50	24.70	24.70		
NR n25/2		100.0%	20.84	20.70	20.84	20.70	21.31	20.40	21.31	20.40	20.50	20.40	20.50	20.40	23.40	23.40		
NR n26		100.0%	25.01	24.50	25.01	24.50	25.21	24.70	25.21	24.70	25.21	24.70	25.21	24.70	24.70	24.70		
NR n30		100.0%	22.37	22.30	22.37	22.30	23.10	23.00	23.10	23.00	23.10	23.00	23.10	23.00	23.20	23.20		
NR n41		100.0%	18.62	18.50	18.62	18.50	19.51	19.50	19.51	19.50	19.50	19.50	19.50	19.50	25.70	25.70		
NR n53		100.0%	19.54	19.00	19.54	19.00	19.76	19.60	19.76	19.60	19.76	19.60	19.76	19.60	20.70	20.70		
NR n66		100.0%	20.10	20.00	20.10	20.00	21.76	19.70	21.76	19.70	19.78	19.70	19.78	19.70	25.70	25.70		
NR n70		100.0%	21.10	21.00	21.10	21.00	21.48	20.60	21.48	20.60	20.70	20.60	20.70	20.60	25.70	25.70		
NR n71	100.0%	25.72	24.70	25.72	24.70	26.69	24.70	26.69	24.70	26.69	24.70	26.69	24.70	24.70	24.70			

Exposure Scenario		Duty Cycle	Head				Body & Hotspot				Hotspot				P <sub>max</sub> (dBm)	
Spatial-average	1-g		1-g				1-g									
Test Distance	0 mm		5 mm				5 mm									
Power Mode (DS)	DS1: 0				DS1: 1				DS1: 1							
Antenna	Tech/Band		P <sub>Average</sub> (dBm)	P <sub>max</sub> + Uncertainty (dBm)	P <sub>Average</sub> (dBm)	P <sub>max</sub> + Uncertainty (dBm)	P <sub>Average</sub> (dBm)	P <sub>max</sub> + Uncertainty (dBm)	P <sub>Average</sub> (dBm)	P <sub>max</sub> + Uncertainty (dBm)	P <sub>Average</sub> (dBm)	P <sub>max</sub> + Uncertainty (dBm)	P <sub>Average</sub> (dBm)	P <sub>max</sub> + Uncertainty (dBm)		
ANT 3	GSM 1900 2 slots	25.0%	34.53	29.30	28.51	23.28	28.78	27.80	22.76	21.78	27.85	27.80	21.83	21.78	30.50	24.48
	W-CDMA B2	100.0%	28.06	23.30	28.06	23.30	22.06	21.90	22.06	21.90	21.95	21.90	21.95	21.90	25.50	25.50
	W-CDMA B4	100.0%	30.90	22.80	30.90	22.80	22.36	22.30	22.36	22.30	22.36	22.30	22.36	22.30	25.50	25.50
	LTE Band 5	100.0%	34.36	25.40	34.36	25.40	28.68	25.30	28.68	25.30	28.68	25.30	28.68	25.30	25.40	25.40
	LTE Band 7	100.0%	29.87	21.80	29.87	21.80	21.15	21.00	21.15	21.00	21.15	21.00	21.15	21.00	25.00	25.00
	LTE Band 12/17	100.0%	35.59	25.40	35.59	25.40	27.63	25.40	27.63	25.40	27.63	25.40	27.63	25.40	25.40	25.40
	LTE Band 13	100.0%	34.21	25.40	34.21	25.40	27.73	25.40	27.73	25.40	27.73	25.40	27.73	25.40	25.40	25.40
	LTE Band 14	100.0%	35.28	25.40	35.28	25.40	28.43	25.40	28.43	25.40	28.43	25.40	28.43	25.40	25.40	25.40
	LTE Band 25/2	100.0%	28.73	23.30	28.73	23.30	21.94	21.90	21.94	21.90	21.94	21.90	21.94	21.90	25.50	25.50
	LTE Band 26	100.0%	33.74	25.40	33.74	25.40	28.27	25.30	28.27	25.30	28.27	25.30	28.27	25.30	25.40	25.40
	LTE Band 30	100.0%	27.85	22.30	27.85	22.30	20.40	20.20	20.40	20.20	20.40	20.20	20.40	20.20	25.00	25.00
	LTE Band 41	63.3%	28.38	24.70	28.39	22.71	22.52	20.90	20.53	18.91	21.00	20.90	19.01	18.91	25.70	23.71
	LTE Band 66/4	100.0%	31.01	22.80	31.01	22.80	22.12	22.10	22.12	22.10	22.12	22.10	22.12	22.10	25.50	25.50
	LTE Band 71	100.0%	36.24	25.40	36.24	25.40	27.20	25.40	27.20	25.40	27.20	25.40	27.20	25.40	25.40	25.40
	NR n5	100.0%	33.74	25.40	33.74	25.40	26.60	25.30	26.60	25.30	26.60	25.30	26.60	25.30	25.40	25.40
	NR n7	100.0%	29.46	21.80	29.46	21.80	21.70	21.50	21.70	21.50	21.70	21.50	21.70	21.50	25.00	25.00
	NR n12	100.0%	35.00	25.40	35.00	25.40	27.69	25.40	27.69	25.40	27.69	25.40	27.69	25.40	25.40	25.40
	NR n14	100.0%	35.13	25.40	35.13	25.40	28.35	25.40	28.35	25.40	28.35	25.40	28.35	25.40	25.40	25.40
	NR n25/2	100.0%	28.32	23.30	28.32	23.30	22.39	22.20	22.39	22.20	22.39	22.20	22.39	22.20	25.50	25.50
	NR n26	100.0%	33.87	25.40	33.87	25.40	27.41	25.30	27.41	25.30	27.41	25.30	27.41	25.30	25.40	25.40
NR n30	100.0%	27.71	22.30	27.71	22.30	20.54	20.20	20.54	20.20	20.54	20.20	20.54	20.20	24.50	24.50	
NR n41	100.0%	26.86	22.70	26.86	22.70	19.71	18.90	19.71	18.90	19.11	18.90	19.11	18.90	25.70	25.70	
NR n66	100.0%	29.23	22.80	29.23	22.80	22.72	22.50	22.72	22.50	22.72	22.50	22.72	22.50	25.50	25.50	
NR n70	100.0%	30.48	22.80	30.48	22.80	23.56	23.50	23.56	23.50	23.56	23.50	23.56	23.50	25.50	25.50	
NR n71	100.0%	36.68	25.40	36.68	25.40	28.33	25.40	28.33	25.40	28.33	25.40	28.33	25.40	25.40	25.40	
ANT 4	GSM 1900 2 slots	25.0%	26.61	26.60	20.59	20.58	27.80	27.70	21.78	21.68	27.80	27.70	21.78	21.68	28.00	21.88
	W-CDMA B2	100.0%	19.86	19.80	19.86	19.80	20.42	20.40	20.42	20.40	20.42	20.40	20.42	20.40	23.40	23.40
	W-CDMA B4	100.0%	19.97	19.80	19.97	19.80	23.27	22.40	23.27	22.40	22.47	22.40	22.47	22.40	23.40	23.40
	LTE Band 7	100.0%	20.04	20.00	20.04	20.00	21.12	20.40	21.12	20.40	20.47	20.40	20.47	20.40	22.70	22.70
	LTE Band 25/2	100.0%	21.15	21.10	21.15	21.10	21.38	21.30	21.38	21.30	21.38	21.30	21.38	21.30	22.90	22.90
	LTE Band 30	100.0%	21.76	21.70	21.76	21.70	22.95	19.90	22.95	19.90	20.00	19.90	20.00	19.90	22.70	22.70
	LTE Band 41	63.3%	22.20	22.10	20.21	20.11	22.37	20.80	20.39	18.81	20.86	20.80	18.88	18.81	25.70	23.71
	LTE Band 48	63.3%	24.34	23.20	22.35	21.21	21.68	21.60	19.70	19.61	21.68	21.60	19.70	19.61	24.70	22.71
	LTE Band 66/4	100.0%	20.88	20.80	20.88	20.80	21.84	21.70	21.84	21.70	21.84	21.70	21.84	21.70	25.20	25.20
	MSS	100.0%	N/A	N/A	N/A	N/A	24.20	21.50	24.20	21.50	22.59	21.50	22.59	21.50	25.80	25.80
	NR n7	100.0%	20.45	20.40	20.45	20.40	21.12	20.50	21.12	20.50	20.70	20.50	20.70	20.50	22.70	22.70
	NR n25/2	100.0%	21.21	21.10	21.21	21.10	21.76	21.70	21.76	21.70	21.76	21.70	21.76	21.70	22.90	22.90
	NR n30	100.0%	21.51	21.50	21.51	21.50	22.28	20.00	22.28	20.00	20.01	20.00	20.01	20.00	22.20	22.20
	NR n41	100.0%	20.17	20.10	20.17	20.10	19.90	18.80	19.90	18.80	18.97	18.80	18.97	18.80	25.70	25.70
	NR n48	100.0%	21.76	21.20	21.76	21.20	19.77	19.60	19.77	19.60	19.77	19.60	19.77	19.60	24.70	24.70
	NR n66	100.0%	21.08	21.00	21.08	21.00	22.83	22.40	22.83	22.40	22.51	22.40	22.51	22.40	25.20	25.20
	NR n70	100.0%	22.64	22.50	22.64	22.50	23.58	23.10	23.58	23.10	23.24	23.10	23.24	23.10	25.20	25.20
	NR n77	100.0%	21.09	21.00	21.09	21.00	20.04	19.90	20.04	19.90	20.04	19.90	20.04	19.90	25.20	25.20
	LTE Band 48	63.3%	32.55	25.00	30.57	23.01	23.37	22.80	21.38	20.81	22.88	22.80	20.90	20.81	25.60	23.61
	NR n48	100.0%	29.36	23.00	29.36	23.00	23.01	20.80	23.01	20.80	20.91	20.80	20.91	20.80	25.60	25.60
NR n77	100.0%	29.93	22.80	29.93	22.80	20.95	20.80	20.95	20.80	20.95	20.80	20.95	20.80	25.70	25.70	
LTE Band 48	63.3%	20.45	20.40	18.47	18.41	25.66	20.90	23.67	18.91	21.90	20.90	19.91	18.91	24.90	22.91	
NR n48	100.0%	18.56	18.40	18.56	18.40	21.57	18.90	21.57	18.90	19.04	18.90	19.04	18.90	24.90	24.90	
NR n77	100.0%	18.91	18.70	18.91	18.70	20.86	18.10	20.86	18.10	18.48	18.10	18.48	18.10	25.70	25.70	
LTE Band 48	63.3%	36.34	23.50	34.36	21.51	20.93	20.90	18.95	18.91	20.93	20.90	18.95	18.91	25.40	23.41	
NR n48	100.0%	34.24	21.50	34.24	21.50	18.91	18.90	18.91	18.90	18.91	18.90	18.91	18.90	25.40	25.40	
NR n77	100.0%	30.80	18.50	30.80	18.50	17.44	17.40	17.44	17.40	17.44	17.40	17.44	17.40	25.70	25.70	

## 5. Power Density Characterization

The EUT's 5G millimeter wave NR contains two Qualcomm millimeter wave antenna modules (module 0 and 1), denoted as ANT M2 and ANT M1 (module 0), and ANT M3 (module 1), which are installed at three different locations as shown in the operational description. There is a total of 153 antenna array configurations per band. In this chapter, a hybrid approach of using electromagnetic (EM) simulation and actual measurements to efficiently, and conservatively, characterize the power density profile for the EUT.

## 5.1. Exposure Scenarios in PD Evaluation

In general, for a smartphone operating at frequencies > 6 GHz, the PD is required to be assessed for all antenna configurations (beams) from all millimeter wave antenna modules installed inside the device. Furthermore, this PD evaluation should be performed at low, mid, and high channels for each supported millimeter wave band.

For this EUT, the 4cm<sup>2</sup> spatially-averaged PD is evaluated along the surfaces (*S1=front*, *S2=back*, *S3=left*, *S4=right*, *S5=top*, and *S6=bottom*) as shown in Figure 5-1) and the worst-case PD is determined by taking the maximum PD among all the evaluated surfaces for each beam/band.

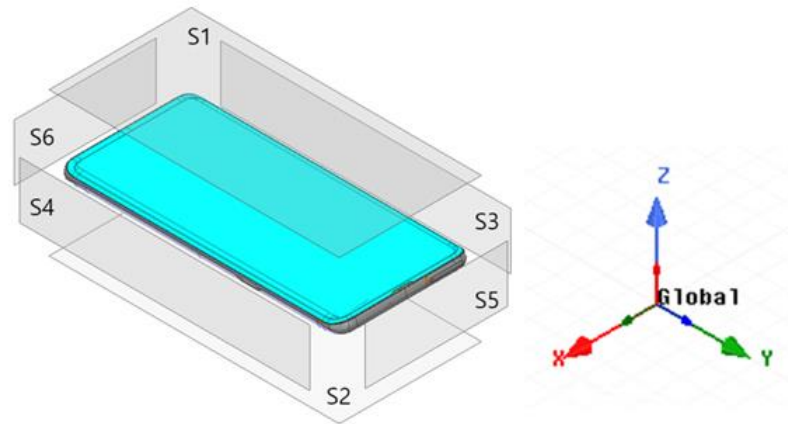


Figure 5-1: EUT surface definition

## 5.2. PD Characterization Overview

Parameters used in PD Characterization:

- The EUT supports a total of 153 beams per band, where 102 beams are single beams (SISO) and 51 are beam pairs (MIMO) where 2 single beams are excited at the same time.
- ***PD<sub>Design Target</sub>***: The design target for PD compliance as defined in the summary report. It should be less than the FCC PD limit to account for all device design related uncertainties.
- ***input.power.limit***: For a PD characterized wireless device, the input power level at antenna port(s) for each beam corresponding to *PD\_design\_target*.
- **PD Characterization**: The table that contains the *input.power.limit* fed to antenna port(s) for all supported beams.

Figure 5-2 outlines the PD Char process.

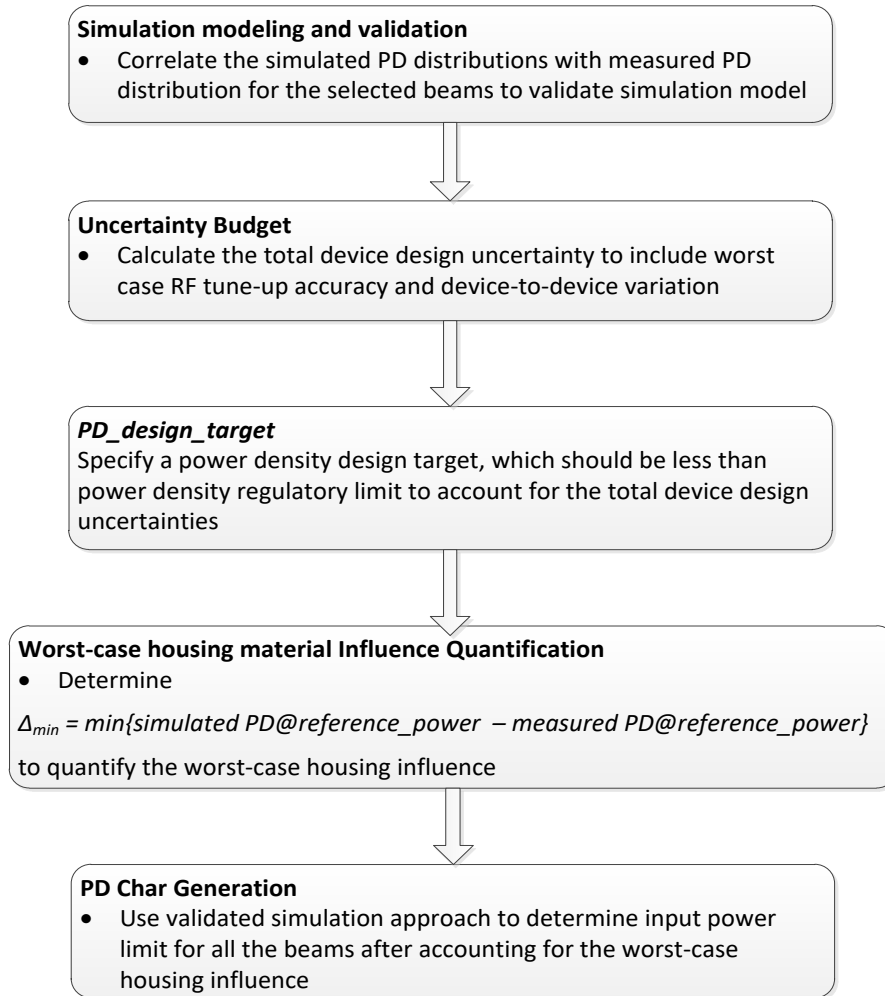


Figure 5-2 High level flow chart for power density characterization

### 5.3. EUT Codebook

In general, all the beams that the smartphone supports are specified in the pre-defined codebook. The codebook is device design specific and generated after evaluating radiation coverage from this specific device.

Table 5-1 shows all the beams and their relevant information. Note that Module IDs 0, 1, and 2 correspond to Antennas M2, M1, and M3, respectively, in Figure 5-1.

The PD evaluation needs to be performed for all the beams listed in Table 5-1.

Table 5-1: EUT Codebook

n258					n260					n261				
Beam ID	Paired With	Module	Ant Type	# of Elements	Beam ID	Paired With	Module	Ant Type	# of Elements	Beam ID	Paired With	Module	Ant Type	# of Elements
0	128	M2	PATCH	1	0	128	M2	PATCH	1	0	128	M2	PATCH	1
1	129	M1	PATCH	1	1	129	M1	PATCH	1	1	129	M1	PATCH	1
2	130	M3	PATCH	1	2	130	M3	PATCH	1	2	130	M3	PATCH	1
3	131	M2	PATCH	1	3	131	M2	PATCH	1	3	131	M2	PATCH	1
4	132	M1	PATCH	1	4	132	M1	PATCH	1	4	132	M1	PATCH	1
5	133	M3	PATCH	1	5	133	M3	PATCH	1	5	133	M3	PATCH	1
6	134	M2	PATCH	1	6	134	M2	PATCH	1	6	134	M2	PATCH	1
7	135	M3	PATCH	1	7	135	M3	PATCH	1	7	135	M3	PATCH	1
8	136	M2	PATCH	1	8	136	M2	PATCH	1	8	136	M2	PATCH	1
9	137	M3	PATCH	1	9	137	M3	PATCH	1	9	137	M3	PATCH	1
10	138	M2	PATCH	1	10	138	M2	PATCH	1	10	138	M2	PATCH	1
11	139	M3	PATCH	1	11	139	M3	PATCH	1	11	139	M3	PATCH	1
12	140	M2	PATCH	2	12	140	M2	PATCH	2	12	140	M2	PATCH	2
13	141	M2	PATCH	2	13	141	M2	PATCH	2	13	141	M2	PATCH	2
14	142	M2	PATCH	2	14	142	M2	PATCH	2	14	142	M2	PATCH	2
15	143	M2	PATCH	2	15	143	M2	PATCH	2	15	143	M2	PATCH	2

n258				
Beam ID	Paired With	Module	Ant Type	# of Elements
16	144	M1	PATCH	2
17	145	M1	PATCH	2
18	146	M1	PATCH	2
19	147	M1	PATCH	2
20	148	M3	PATCH	2
21	149	M3	PATCH	2
22	150	M3	PATCH	2
23	151	M3	PATCH	2
24	152	M2	PATCH	2
25	153	M2	PATCH	2
26	154	M2	PATCH	2
27	155	M1	PATCH	2
28	156	M1	PATCH	2
29	157	M1	PATCH	2
30	158	M3	PATCH	2
31	159	M3	PATCH	2
32	160	M3	PATCH	2
33	161	M2	PATCH	5
34	162	M2	PATCH	5
35	163	M2	PATCH	5
36	164	M2	PATCH	5
37	165	M2	PATCH	5
38	166	M3	PATCH	5
39	167	M3	PATCH	5
40	168	M3	PATCH	5
41	169	M3	PATCH	5
42	170	M3	PATCH	5
43	171	M2	PATCH	5
44	172	M2	PATCH	5
45	173	M2	PATCH	5
46	174	M2	PATCH	5
47	175	M3	PATCH	5
48	176	M3	PATCH	5
49	177	M3	PATCH	5
50	178	M3	PATCH	5
128	0	M2	PATCH	1
129	1	M1	PATCH	1
130	2	M3	PATCH	1
131	3	M2	PATCH	1
132	4	M1	PATCH	1
133	5	M3	PATCH	1
134	6	M2	PATCH	1
135	7	M3	PATCH	1
136	8	M2	PATCH	1
137	9	M3	PATCH	1
138	10	M2	PATCH	1
139	11	M3	PATCH	1
140	12	M2	PATCH	2
141	13	M2	PATCH	2
142	14	M2	PATCH	2
143	15	M2	PATCH	2
144	16	M1	PATCH	2
145	17	M1	PATCH	2
146	18	M1	PATCH	2
147	19	M1	PATCH	2
148	20	M3	PATCH	2
149	21	M3	PATCH	2
150	22	M3	PATCH	2
151	23	M3	PATCH	2
152	24	M2	PATCH	2
153	25	M2	PATCH	2
154	26	M2	PATCH	2
155	27	M1	PATCH	2
156	28	M1	PATCH	2
157	29	M1	PATCH	2
158	30	M3	PATCH	2
159	31	M3	PATCH	2
160	32	M3	PATCH	2
161	33	M2	PATCH	5
162	34	M2	PATCH	5
163	35	M2	PATCH	5
164	36	M2	PATCH	5
165	37	M2	PATCH	5
166	38	M3	PATCH	5
167	39	M3	PATCH	5
168	40	M3	PATCH	5
169	41	M3	PATCH	5
170	42	M3	PATCH	5
171	43	M2	PATCH	5
172	44	M2	PATCH	5
173	45	M2	PATCH	5
174	46	M2	PATCH	5
175	47	M3	PATCH	5
176	48	M3	PATCH	5
177	49	M3	PATCH	5
178	50	M3	PATCH	5

n260				
Beam ID	Paired With	Module	Ant Type	# of Elements
16	144	M1	PATCH	2
17	145	M1	PATCH	2
18	146	M1	PATCH	2
19	147	M1	PATCH	2
20	148	M3	PATCH	2
21	149	M3	PATCH	2
22	150	M3	PATCH	2
23	151	M3	PATCH	2
24	152	M2	PATCH	2
25	153	M2	PATCH	2
26	154	M2	PATCH	2
27	155	M1	PATCH	2
28	156	M1	PATCH	2
29	157	M1	PATCH	2
30	158	M3	PATCH	2
31	159	M3	PATCH	2
32	160	M3	PATCH	2
33	161	M2	PATCH	5
34	162	M2	PATCH	5
35	163	M2	PATCH	5
36	164	M2	PATCH	5
37	165	M2	PATCH	5
38	166	M3	PATCH	5
39	167	M3	PATCH	5
40	168	M3	PATCH	5
41	169	M3	PATCH	5
42	170	M3	PATCH	5
43	171	M2	PATCH	5
44	172	M2	PATCH	5
45	173	M2	PATCH	5
46	174	M2	PATCH	5
47	175	M3	PATCH	5
48	176	M3	PATCH	5
49	177	M3	PATCH	5
50	178	M3	PATCH	5
128	0	M2	PATCH	1
129	1	M1	PATCH	1
130	2	M3	PATCH	1
131	3	M2	PATCH	1
132	4	M1	PATCH	1
133	5	M3	PATCH	1
134	6	M2	PATCH	1
135	7	M3	PATCH	1
136	8	M2	PATCH	1
137	9	M3	PATCH	1
138	10	M2	PATCH	1
139	11	M3	PATCH	1
140	12	M2	PATCH	2
141	13	M2	PATCH	2
142	14	M2	PATCH	2
143	15	M2	PATCH	2
144	16	M1	PATCH	2
145	17	M1	PATCH	2
146	18	M1	PATCH	2
147	19	M1	PATCH	2
148	20	M3	PATCH	2
149	21	M3	PATCH	2
150	22	M3	PATCH	2
151	23	M3	PATCH	2
152	24	M2	PATCH	2
153	25	M2	PATCH	2
154	26	M2	PATCH	2
155	27	M1	PATCH	2
156	28	M1	PATCH	2
157	29	M1	PATCH	2
158	30	M3	PATCH	2
159	31	M3	PATCH	2
160	32	M3	PATCH	2
161	33	M2	PATCH	5
162	34	M2	PATCH	5
163	35	M2	PATCH	5
164	36	M2	PATCH	5
165	37	M2	PATCH	5
166	38	M3	PATCH	5
167	39	M3	PATCH	5
168	40	M3	PATCH	5
169	41	M3	PATCH	5
170	42	M3	PATCH	5
171	43	M2	PATCH	5
172	44	M2	PATCH	5
173	45	M2	PATCH	5
174	46	M2	PATCH	5
175	47	M3	PATCH	5
176	48	M3	PATCH	5
177	49	M3	PATCH	5
178	50	M3	PATCH	5

n261				
Beam ID	Paired With	Module	Ant Type	# of Elements
16	144	M1	PATCH	2
17	145	M1	PATCH	2
18	146	M1	PATCH	2
19	147	M1	PATCH	2
20	148	M3	PATCH	2
21	149	M3	PATCH	2
22	150	M3	PATCH	2
23	151	M3	PATCH	2
24	152	M2	PATCH	2
25	153	M2	PATCH	2
26	154	M2	PATCH	2
27	155	M1	PATCH	2
28	156	M1	PATCH	2
29	157	M1	PATCH	2
30	158	M3	PATCH	2
31	159	M3	PATCH	2
32	160	M3	PATCH	2
33	161	M2	PATCH	5
34	162	M2	PATCH	5
35	163	M2	PATCH	5
36	164	M2	PATCH	5
37	165	M2	PATCH	5
38	166	M3	PATCH	5
39	167	M3	PATCH	5
40	168	M3	PATCH	5
41	169	M3	PATCH	5
42	170	M3	PATCH	5
43	171	M2	PATCH	5
44	172	M2	PATCH	5
45	173	M2	PATCH	5
46	174	M2	PATCH	5
47	175	M3	PATCH	5
48	176	M3	PATCH	5
49	177	M3	PATCH	5
50	178	M3	PATCH	5
128	0	M2	PATCH	1
129	1	M1	PATCH	1
130	2	M3	PATCH	1
131	3	M2	PATCH	1
132	4	M1	PATCH	1
133	5	M3	PATCH	1
134	6	M2	PATCH	1
135	7	M3	PATCH	1
136	8	M2	PATCH	1
137	9	M3	PATCH	1
138	10	M2	PATCH	1
139	11	M3	PATCH	1
140	12	M2	PATCH	2
141	13	M2	PATCH	2
142	14	M2	PATCH	2
143	15	M2	PATCH	2
144	16	M1	PATCH	2
145	17	M1	PATCH	2
146	18	M1	PATCH	2
147	19	M1	PATCH	2
148	20	M3	PATCH	2
149	21	M3	PATCH	2
150	22	M3	PATCH	2
151	23	M3	PATCH	2
152	24	M2	PATCH	2
153	25	M2	PATCH	2
154	26	M2	PATCH	2
155	27	M1	PATCH	2
156	28	M1	PATCH	2
157	29	M1	PATCH	2
158	30	M3	PATCH	2
159	31	M3	PATCH	2
160	32	M3	PATCH	2
161	33	M2	PATCH	5
162	34	M2	PATCH	5
163	35	M2	PATCH	5
164	36	M2	PATCH	5
165	37	M2	PATCH	5
166	38	M3	PATCH	5
167	39	M3	PATCH	5
168	40	M3	PATCH	5
169	41	M3	PATCH	5
170	42	M3	PATCH	5
171	43	M2	PATCH	5
172	44	M2	PATCH	5
173	45	M2	PATCH	5
174	46	M2	PATCH	5
175	47	M3	PATCH	5
176	48	M3	PATCH	5
177	49	M3	PATCH	5
178	50	M3	PATCH	5

## 5.4. Simulation and modeling validation

### 5.4.1. Modeling for Simulation

Device modeling is described in the operational description.

### 5.4.2. Modeling Validation

To validate modeling and simulation:

1. Select one beam (i.e., antenna array configuration) per antenna type (dipole/patch) and per antenna module. All three antennas contain only patch arrays. Therefore, the beam selection criteria for each millimeter wave antenna are:
  - a) Two beams from each antenna module.

Note: Since the relative phase between two single beams in a beam pair is uncontrolled and could vary from run to run, for the validation purpose, the selection is limited to the single beam antenna array configuration. Additionally, single beam containing a higher number of active antenna elements is selected. For example, a single beam with four active patches should be selected over beam with a single active patch antenna beam.

The beams selected for modeling validation are highlighted in grey in Table 5-1.

2. For a given input power, perform both PD simulation and PD measurement to obtain the simulated PD distributions and measured PD distributions on the surface in front of the antenna array as well as the surfaces that are adjacent to the antenna array as they could potentially have strong radiating energy when considering the orientation of antenna array and type of antenna array (i.e., patch array or dipole array).
3. Validate modeling and simulation by correlating the simulated PD distribution and measured PD distribution for all antenna array configurations selected in Step 1 and for all surfaces selected in Step 2.

The modeling validation is performed through correlating the simulated point PD distribution to measured point PD distribution.

The difference in 4cm<sup>2</sup>-avg PD is not used for the purpose of validity of the modeling because the housing material property (for non-metal material) used in the simulation is an approximation (note the accurate material properties are not available at millimeter wave frequencies). This discrepancies in PD magnitude will be used to determine the worst-case housing influence (due to non-metal material property uncertainty) in §5.6. The worst-case housing influence will be accounted for in PD Characterization generation for conservative RF exposure assessment, see §5.7 for details.

Based on the selection criteria described in Step 1 and Step 2, the beams and surfaces selected for modeling validation of the EUT are listed in Table 5-2.

**Table 5-2: Beams and surfaces selection for PD correlation**

Band	Beam ID	Antenna	Pol	Surface
n258	43	M2	V	S2
	172		H	S2
	18	M1	V	S2
	146		H	S2
	38	M3	V	S3
	166		H	S3
n260	44	M2	V	S2
	163		H	S2
	19	M1	V	S2
	147		H	S2
	50	M3	V	S3
	178		H	S3
n261	35	M2	V	S2
	171		H	S2
	28	M1	V	S2
	155		H	S2
	38	M3	V	S3
	175		H	S3

With an input power of 6 dBm for n258, n260, and n261, PD measurement and PD simulation are conducted for all beams and surfaces listed in Table 5-2. Both PD measurement and PD simulation are performed at mid channel of each millimeter wave beam, PD measurement is conducted with CW modulation.

- PD distribution:

Please refer to the operational description.

- 4cm<sup>2</sup>-averaged PD value

Table 5-3 lists the measured 4cm<sup>2</sup>-averaged PD and simulated 4cm<sup>2</sup>-averaged PD for all selected beams and surfaces for n258, n260, and n261 bands. The discrepancy between simulated and measured PD value will be used to determine worst-case housing influence for conservative assessment (see §5.6).

**Table 5-3: Measured and simulated 4cm<sup>2</sup> averaged PD for selected beams with 6 dBm input power for n258, n260, and n261**

Band	Beam ID	Antenna	Pol	Surface	4cm <sup>2</sup> avg. PD (W/m <sup>2</sup> )		Delta <sup>1</sup>
					Meas.	Sim	
n258	43	M2	V	S2	18.90	16.41	<b>-0.61</b>
	172		H	S2	13.00	12.81	<b>-0.06</b>
	18	M1	V	S2	5.41	6.36	<b>0.70</b>
	146		H	S2	4.92	6.66	<b>1.32</b>
	38	M3	V	S3	16.70	21.76	<b>1.15</b>
	166		H	S3	18.20	20.92	<b>0.60</b>
n260	44	M2	V	S2	12.00	13.43	<b>0.49</b>
	163		H	S2	13.00	17.07	<b>1.18</b>
	19	M1	V	S2	2.09	4.25	<b>3.08</b>
	147		H	S2	1.91	3.60	<b>2.75</b>
	50	M3	V	S3	14.40	19.80	<b>1.38</b>
	178		H	S3	13.60	16.04	<b>0.72</b>
n261	35	M2	V	S2	14.80	19.97	<b>1.30</b>
	171		H	S2	15.60	16.76	<b>0.31</b>
	28	M1	V	S2	4.99	7.19	<b>1.59</b>
	155		H	S2	4.33	7.05	<b>2.12</b>
	38	M3	V	S3	15.80	23.00	<b>1.63</b>
	175		H	S3	17.70	27.08	<b>1.85</b>

<sup>1</sup>Delta = Sim - Meas (dB)



### 5.4.3. Simulation for power density

The model is validated in §5.4.3, the PD exposure of EUT can be reliably assessed using the validated simulation approach.

In general, all six surfaces of the EUT, as shown in Figure 4-2, should be assessed for RF exposure from the millimeter wave radio and the worst-case PD should be determined by:

$$PD_{\text{worst-case}} = \max \{PD_{s1}, PD_{s2}, PD_{s3}, PD_{s4}, PD_{s5}, PD_{s6}\} \quad (1)$$

where  $PD_{s1}, PD_{s2}, PD_{s3}, PD_{s4}, PD_{s5}, PD_{s6}$  are the highest 4cm<sup>2</sup>-averaged PD on surface S1, S2, S3, S4, S5 and S6 of the device. respectively.

However, depending on the location of the millimeter wave module and the antenna array orientation relative to the surface of the device, one or more surface(s) can be excluded for PD calculation as the PD value(s) on the excluded surface(s) will be undoubtedly lower when comparing to other surfaces; thus, the exclusion will have no impact for the worst-case PD determined using Equation 1.

For this EUT, based on the location of M2, M1, and M3 (shown in the operational description) and the type of antenna array (containing in each millimeter wave Ant), the surface planes identified for PD evaluation to determine the worst-case PD are selected and listed in Table 5-4.

**Table 5-4: PD evaluation plane**

ANT	Front	Back	Left	Right	Top	Bottom
	S1	S2	S3	S4	S5	S6
<b>M2</b>	No	Yes	Yes	No	No	No
<b>M1</b>	No	Yes	Yes	No	Yes	No
<b>M3</b>	Yes	Yes	No	Yes	No	No

The EM simulation is performed to characterize PD at low, mid, and high channels for each supported band. The simulation setup (mesh, convergence criteria, and radiation boundary settings) as described in the operational description, ensures the accurate and reliable result for PD simulation on the planes identified. Both point PD and 4cm<sup>2</sup>-averaged PD distributions on the worst surface plane (i.e., the surface having highest PD value for the beam tested) are plotted and provided in the operational description to show that the PD hotspots are captured in this analysis.

### 5.5. PD<sub>Design Target</sub>

The manufacturer has their own internal controls for managing uncertainty for use in determining the  $PD_{\text{Design Target}}$  using Qualcomm's modules.

To account for the total design related uncertainty,  $PD_{\text{Design Target}}$  needs to be:

$$PD_{\text{Design Target}} < PD_{\text{regulatory\_limit}} \times 10^{\frac{-\text{total uncertainty}}{10}}$$

With FCC's 4cm<sup>2</sup>-averaged PD requirement of 10 W/m<sup>2</sup>, the  $PD_{\text{Design Target}}$  is determined as:

PD <sub>Design Target</sub> (W/m <sup>2</sup> )	PD <sub>Design Limit</sub> (W/m <sup>2</sup> )
3.9	6.3

## 5.6. Worst-case Housing Influence Determination

For non-metal material, the material property cannot be accurately characterized at millimeter wave frequencies to date. The estimated material property for the device housing is used in the simulation model, which could influence the accuracy in simulation for PD amplitude quantification. Since the housing influence on PD could vary from surface to surface where the EM field propagates through, the most underestimated surface is used to quantify the worst-case housing influence for conservative assessment.

Since the millimeter wave antenna modules are placed at different locations, as shown in the operational description, only material/housing have an impact on EM field propagation, and, in turn, impact on power density. Furthermore, depending on the type of antenna array, i.e., dipole antenna array or patch antenna array, the nature of EM field propagation in the near field is different. Therefore, the worst-case housing influence is determined per antenna module and per antenna type.

For this EUT, when comparing a simulated 4cm<sup>2</sup>-averaged PD and measured 4 cm<sup>2</sup>-averaged PD, the worst error introduced for each type of antenna array and antenna module when using the estimated material property in the simulation is accented in bold numbers in Table 5-5. Thus, the worst-case housing influence, denoted as  $\Delta_{min} = \text{Sim. PD} - \text{Meas. PD}$ , is determined as:

**Table 5-5:  $\Delta_{min}$  for M2, M1 and M3**

Band	Ant	Pol	$\Delta_{min}$ (dB)
n258	M2	V	<b>-0.61</b>
		H	<b>-0.06</b>
	M1	V	<b>0.70</b>
		H	<b>1.32</b>
	M3	V	<b>1.15</b>
		H	<b>0.60</b>
n260	M2	V	<b>0.49</b>
		H	<b>1.18</b>
	M1	V	<b>3.08</b>
		H	<b>2.75</b>
	M3	V	<b>1.38</b>
		H	<b>0.72</b>
n261	M2	V	<b>1.30</b>
		H	<b>0.31</b>
	M1	V	<b>1.59</b>
		H	<b>2.12</b>
	M3	V	<b>1.63</b>
		H	<b>1.85</b>

$\Delta_{min}$  represents the worst case where RF exposure is underestimated the most in simulation when using the estimated material property for glass/plastics of the housing. For conservative assessment, the  $\Delta_{min}$  is used as the worst-case factor and applied to all the beams in the corresponding beam group to determine input power limits in PD char for compliance (see §5.7.3 for details).

## 5.7. PD Characterization

This section describes the PD Characterization generation that complies with the  $PD_{Design\ Target}$  determined in §5.5 and complies the regulatory power density limit.

### 5.7.1. Scaling Factor for Single Beams

To determine the input power limit at each antenna port, perform the simulation at low, mid, and high channel for each millimeter wave band supported, with a given input power per active port:

1. Obtain  $PD_{surface}$  value (the worst PD among all identified surfaces of the EUT) at all three channels for all single beams specified in the codebook of Table 5-1.
2. Derive a scaling factor at low, mid and high channel,  $s(i)_{low\_or\_mid\_or\_high}$ , by:

$$s(i)_{low\_or\_mid\_or\_high} = \frac{PD\ design\ target}{sim.PD_{surface}(i)}, \quad i \in single\ beams \quad (2)$$

3. Determine the worst-case scaling factor,  $s(i)$ , among low, mid and high channels:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, \quad i \in single\ beams \quad (3)$$

and this scaling factor applies to the input power at each antenna port.

### 5.7.2. Scaling Factor for Beam Pairs

The relative phase between beam pair is not controlled in the EUT and could vary from run to run. Therefore, for a beam pair, based on the simulation results, the worst-case scaling factor needs to be determined mathematically to ensure compliance.

For a beam pair, extract the E-fields and H-fields from the corresponding single beams at low, mid, and high channel for each supported band and for all identified surfaces of the EUT.

For a given beam pair containing  $beam_a$  and  $beam_b$ , and for a given channel, let relative phase between  $beam_a$  and  $beam_b = \emptyset$ , and the total PD of the beam pair can be expressed as:

$$\begin{aligned} total\ PD(\emptyset) &= \frac{1}{2} \sqrt{Re\{PD_x(\emptyset)\}^2 + Re\{PD_y(\emptyset)\}^2 + Re\{PD_z(\emptyset)\}^2} \\ &= \frac{1}{2} Re\left\{\left(\vec{E}_a + \vec{E}_b e^{j\omega\emptyset}\right) \times \left(\vec{H}_a + \vec{H}_b e^{j\omega\emptyset}\right)^*\right\} \quad (4) \end{aligned}$$

where,  $PD_x(\emptyset)$ ,  $PD_y(\emptyset)$ , and  $PD_z(\emptyset)$  are the three components of the  $total\ PD(\emptyset)$ ;  $E_a$  and  $H_a$  are the extracted E-fields and H-fields of  $beam_a$ , while  $E_b$  and  $H_b$  are the extracted E-fields and H-fields of  $beam_b$ .

Sweep  $\emptyset$  with a  $5^\circ$  step from  $0^\circ$  to  $360^\circ$  to determine the worst-case,  $\emptyset_{worstcase}$ , which results in the highest  $total\ PD(\emptyset)$  among all identified surfaces for this beam pair at this channel. For details on the worst case  $total\ PD(\emptyset)$  derivation, see Appendix A.

Follow the above procedure to determine  $\emptyset_{worstcase}$  for all three channels to obtain the scaling factor given by the equation below for low, mid, and high channels:

$$s(i)_{low\_or\_mid\_or\_high} = \frac{PD\ design\ target}{total\ PD(\emptyset(i)_{worstcase})}, \quad i \in beam\ pairs \quad (5)$$

The  $\emptyset_{worstcase}$  varies with channel and beam pair, the lowest scaling factor among all three channels,  $s(i)$ , is determined for the beam pair  $i$ :

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, \quad i \in beam\ pairs \quad (6)$$

### 5.7.3. Input Power Limit

The PD Characterization specifies the limit of input power at an antenna port that corresponds to  $PD_{Design\ Target}$  for all beams.

Ideally, if there is no uncertainty associated with hardware design, the input power limit, denoted as  $input.power.limit(i)$ , for beam  $i$  can be obtained after accounting for the housing influence ( $\Delta_{min}$ ) determined in Table 4-8 of §4.6, given by:

$$input.power.limit(i) = P_{ref} + 10 * \log(s(i)) + \Delta_{min}, \quad i \in all\ beams \quad (7)$$

where  $P_{ref}$  is the input power using in simulation;  $s(i)$  is the scaling factor obtained from Eq. (3) or Eq. (6) for beam  $i$ ;  $\Delta_{min}$  is the worst-case housing influence factor (determined in Table 4-8) for beam  $i$ .

If simulation overestimates the housing influence, then  $\Delta_{min}$  (= simulated PD – measured PD) is negative, which means that the measured PD would be higher than the simulated PD. The input power to antenna elements determined via simulation must be decreased for compliance.

Similarly, if simulation underestimates the loss, then  $\Delta_{min}$  is positive (measured PD would be lower than the simulated value). Input power to antenna elements determined via simulation can be increased and still be PD compliant.

The hardware design has uncertainty which must be properly considered. In §5.6, the TxAGC uncertainty is embedded in the process of  $\Delta_{min}$  determination. Since TxAGC uncertainty is already accounted for in  $PD_{Design Target}$  (see §5.5), it needs to be removed to avoid double counting this uncertainty.

Thus, Equation 7 is modified to:

**If** -TxAGC uncertainty <  $\Delta_{min}$  < TxAGC uncertainty,

$$input.power.limit(i) = P_{ref} + 10 * \log(s(i)), i \in all\ beams \quad (8)$$

**else if**  $\Delta_{min}$  < -TxAGC uncertainty,

$$input.power.limit(i) = P_{ref} + 10 * \log(s(i)) + (\Delta_{min} + TxAGC\ uncertainty), i \in all\ beams \quad (9)$$

**else if**  $\Delta_{min}$  > TxAGC uncertainty,

$$input.power.limit(i) = P_{ref} + 10 * \log(s(i)) + (\Delta_{min} - TxAGC\ uncertainty), i \in all\ beams \quad (10)$$

Following the logic above, the *input.power.limit* for this EUT can be calculated using Equations (8), (9) and (10), i.e.,

**Table 5-6: *input.power.limit* calculation**

Band	Ant	Pol	$\Delta_{min}$ (dB)	Notes
n258	M2	V	<b>-0.61</b>	Using Eq. 8
		H	<b>-0.06</b>	Using Eq. 8
	M1	V	<b>0.70</b>	Using Eq. 8
		H	<b>1.32</b>	Using Eq. 10
	M3	V	<b>1.15</b>	Using Eq. 10
		H	<b>0.60</b>	Using Eq. 8
n260	M2	V	<b>0.49</b>	Using Eq. 8
		H	<b>1.18</b>	Using Eq. 10
	M1	V	<b>3.08</b>	Using Eq. 10
		H	<b>2.75</b>	Using Eq. 10
	M3	V	<b>1.38</b>	Using Eq. 10
		H	<b>0.72</b>	Using Eq. 8
n261	M2	V	<b>1.30</b>	Using Eq. 10
		H	<b>0.31</b>	Using Eq. 8
	M1	V	<b>1.59</b>	Using Eq. 10
		H	<b>2.12</b>	Using Eq. 10
	M3	V	<b>1.63</b>	Using Eq. 10
		H	<b>1.85</b>	Using Eq. 10

Thus, the EUT PD Char for n258, n260, and n261 bands are as shown in Table 5-7.

**Table 5-7: PD Characterization**

n258			n260			n261		
Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)
N/A	0	8.2	N/A	0	9.7	N/A	0	8.4
	1	8.7		1	10.9		1	9.0
	2	6.3		2	6.0		2	5.3
	3	7.4		3	9.5		3	8.4
	4	9.1		4	12.0		4	9.4
	5	5.8		5	8.5		5	8.5
	6	8.6		6	8.5		6	8.3
	7	7.1		7	7.6		7	6.4
	8	9.6		8	8.3		8	8.3
	9	7.2		9	7.5		9	7.9
	10	8.5		10	8.8		10	8.9
	11	6.7		11	6.4		11	6.0
	12	5.4		12	5.9		12	5.9
	13	3.4		13	6.8		13	4.1
	14	4.7		14	7.2		14	6.3
	15	5.0		15	5.6		15	5.8
	16	6.3		16	8.5		16	6.1
	17	5.1		17	9.0		17	5.0
	18	5.0		18	8.3		18	5.1
	19	5.5		19	7.9		19	7.0
	20	4.2		20	4.3		20	3.6
	21	3.6		21	4.8		21	3.5
	22	5.0		22	4.7		22	3.8
	23	2.6		23	6.6		23	4.0
	24	3.8		24	6.3		24	4.4
	25	4.2		25	7.2		25	4.2
	26	5.4		26	5.3		26	5.5
	27	5.7		27	8.9		27	5.8
	28	5.0		28	8.6		28	5.0
	29	5.2		29	8.0		29	5.5
	30	3.5		30	3.8		30	3.6
	31	2.8		31	5.1		31	3.6
	32	3.3		32	3.6		32	4.7
	33	0.6		33	2.8		33	0.6
	34	-0.1		34	2.0		34	0.7
35	0.2	35	1.9	35	0.0			

n258			n260			n261		
Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)
N/A	36	0.6	N/A	36	2.8	N/A	36	1.2
	37	2.5		37	2.6		37	1.7
	38	-0.4		38	2.7		38	-0.6
	39	0.0		39	2.5		39	0.2
	40	0.0		40	0.6		40	0.3
	41	-0.2		41	0.5		41	0.6
	42	0.3		42	0.4		42	0.0
	43	-0.2		43	2.8		43	0.8
	44	0.0		44	1.7		44	0.2
	45	0.5		45	2.4		45	0.3
	46	1.3		46	2.9		46	1.2
	47	-0.2		47	2.5		47	-0.3
	48	0.0		48	1.4		48	0.7
	49	0.2		49	0.7		49	0.4
	50	-0.2		50	0.0		50	0.4
	128	8.0		128	9.5		128	8.1
	129	9.0		129	12.4		129	9.3
	130	6.0		130	6.8		130	5.6
	131	8.8		131	8.3		131	7.0
	132	8.7		132	11.7		132	9.1
	133	7.1		133	7.6		133	6.2
	134	8.2		134	8.4		134	6.6
	135	7.4		135	8.0		135	7.4
	136	7.9		136	8.7		136	7.6
	137	7.4		137	7.8		137	6.6
	138	8.1		138	8.7		138	7.4
	139	7.3		139	7.3		139	7.5
	140	4.0		140	7.7		140	4.0
	141	5.9		141	4.6		141	2.8
	142	4.3		142	5.0		142	4.9
143	8.5	143	5.5	143	3.9			
144	5.8	144	8.8	144	5.7			
145	5.4	145	9.7	145	5.6			
146	4.9	146	9.2	146	5.7			
147	5.8	147	8.6	147	7.2			
148	4.6	148	4.0	148	2.9			
149	3.2	149	5.0	149	2.8			
150	4.6	150	3.9	150	2.8			

n258			n260			n261		
Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)
N/A	151	4.2	N/A	151	4.3	N/A	151	4.3
	152	6.3		152	7.2		152	4.2
	153	5.4		153	5.0		153	2.9
	154	6.0		154	5.0		154	3.7
	155	5.4		155	9.1		155	5.4
	156	5.0		156	9.7		156	5.8
	157	5.3		157	8.9		157	6.6
	158	3.7		158	4.4		158	2.1
	159	3.0		159	5.6		159	2.8
	160	3.4		160	4.2		160	2.8
	161	1.8		161	2.7		161	0.2
	162	0.8		162	1.8		162	-0.2
	163	1.1		163	0.7		163	0.6
	164	2.5		164	1.0		164	0.8
	165	1.6		165	1.7		165	1.0
	166	-0.2		166	1.1		166	-1.1
	167	-0.2		167	2.4		167	-0.9
	168	0.1		168	1.3		168	1.0
169	0.3	169	1.2	169	1.6			
170	0.5	170	1.3	170	-0.1			
171	0.8	171	2.4	171	-0.4			
172	0.7	172	1.0	172	0.0			
173	1.8	173	0.8	173	0.6			
174	2.3	174	1.3	174	1.1			
175	-0.2	175	2.1	175	-1.3			
176	0.0	176	2.2	176	0.1			
177	0.2	177	1.0	177	1.6			
178	-0.1	178	0.9	178	0.5			
128	0	3.9	128	0	5.7	128	0	4.3
129	1	5.6	129	1	8.4	129	1	5.9
130	2	1.9	130	2	3.1	130	2	2.1
131	3	4.3	131	3	5.3	131	3	3.6
132	4	5.6	132	4	8.6	132	4	5.8
133	5	2.9	133	5	4.7	133	5	3.3
134	6	4.9	134	6	4.6	134	6	3.8
135	7	3.8	135	7	5.0	135	7	3.4
136	8	4.6	136	8	4.8	136	8	4.0
137	9	3.9	137	9	4.2	137	9	3.9
138	10	4.8	138	10	5.0	138	10	3.8
139	11	3.2	139	11	3.3	139	11	3.2
140	12	1.3	140	12	3.1	140	12	1.5

n258			n260			n261		
Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)	Paired ID (Beam Pair)	Beam ID	Input Power Limit (dBm)
141	13	0.7	141	13	2.9	141	13	-0.3
142	14	1.7	142	14	2.8	142	14	1.8
143	15	2.4	143	15	2.1	143	15	0.7
144	16	2.9	144	16	5.3	144	16	2.7
145	17	2.0	145	17	6.0	145	17	2.2
146	18	1.7	146	18	5.4	146	18	2.3
147	19	2.6	147	19	5.2	147	19	3.6
148	20	0.6	148	20	0.7	148	20	0.0
149	21	1.0	149	21	2.5	149	21	-0.3
150	22	1.1	150	22	0.9	150	22	0.1
151	23	-0.3	151	23	2.3	151	23	1.5
152	24	1.0	152	24	3.7	152	24	0.7
153	25	1.2	153	25	2.9	153	25	-0.5
154	26	2.2	154	26	1.4	154	26	1.7
155	27	2.4	155	27	5.6	155	27	2.5
156	28	1.7	156	28	5.7	156	28	2.2
157	29	2.1	157	29	5.3	157	29	2.9
158	30	0.8	158	30	0.6	158	30	-0.4
159	31	-1.3	159	31	2.1	159	31	-0.2
160	32	-0.5	160	32	1.6	160	32	0.4
161	33	-2.8	161	33	-0.7	161	33	-3.6
162	34	-2.9	162	34	-1.5	162	34	-3.8
163	35	-3.0	163	35	-1.9	163	35	-3.4
164	36	-2.5	164	36	-1.3	164	36	-3.0
165	37	-1.5	165	37	-1.3	165	37	-2.9
166	38	-4.1	166	38	-2.2	166	38	-4.3
167	39	-4.3	167	39	-1.5	167	39	-3.9
168	40	-4.3	168	40	-2.5	168	40	-3.4
169	41	-4.0	169	41	-2.4	169	41	-2.6
170	42	-3.0	170	42	-2.3	170	42	-3.4
171	43	-3.5	171	43	-1.0	171	43	-3.9
172	44	-3.1	172	44	-1.8	172	44	-3.8
173	45	-2.9	173	45	-1.7	173	45	-3.3
174	46	-2.1	174	46	-1.5	174	46	-3.0
175	47	-4.2	175	47	-1.8	175	47	-4.3
176	48	-4.1	176	48	-1.6	176	48	-3.3
177	49	-4.1	177	49	-2.6	177	49	-2.9
178	50	-3.7	178	50	-3.2	178	50	-3.2



## A Worst Phase Derivation for Beam Pair

For beam pairs, since the relative phase between two beams is unknown, finding the worst-case PD by sweeping the relative phase for all possible angles is required for conservative assessment.

Assuming E-field and H-field of  $beam_a$  are  $\{E_{x_a}, E_{y_a}, E_{z_a}\}$  and  $\{H_{x_a}, H_{y_a}, H_{z_a}\}$ , respectively; E-field and H-field of  $beam_b$  are  $\{E_{x_b}, E_{y_b}, E_{z_b}\}$  and  $\{H_{x_b}, H_{y_b}, H_{z_b}\}$ , respectively; and the relative phase is  $\phi$ , for beam pair consisting of  $beam_a$  and  $beam_b$ , the combined E- and H-fields,  $\{E_{x_{pair_i}}, E_{y_{pair_i}}, E_{z_{pair_i}}\}$  and  $\{H_{x_{pair_i}}, H_{y_{pair_i}}, H_{z_{pair_i}}\}$ , can be expressed as:

$$E_x(\phi)_{pair_i} = E_{x_a} + E_{x_b} \times e^{-j\omega\phi}$$

$$E_y(\phi)_{pair_i} = E_{y_a} + E_{y_b} \times e^{-j\omega\phi}$$

$$E_z(\phi)_{pair_i} = E_{z_a} + E_{z_b} \times e^{-j\omega\phi}$$

$$H_x(\phi)_{pair_i} = H_{x_a} + H_{x_b} \times e^{-j\omega\phi}$$

$$H_y(\phi)_{pair_i} = H_{y_a} + H_{y_b} \times e^{-j\omega\phi}$$

$$H_z(\phi)_{pair_i} = H_{z_a} + H_{z_b} \times e^{-j\omega\phi}$$

The combined PD can then be calculated:

$$PDx(\phi)_{pair_i} = E_y(\phi)_{pair_i} \times H_z(\phi)_{pair_i}^* - E_z(\phi)_{pair_i} \times H_y(\phi)_{pair_i}^*$$

$$PDy(\phi)_{pair_i} = E_z(\phi)_{pair_i} \times H_x(\phi)_{pair_i}^* - E_x(\phi)_{pair_i} \times H_z(\phi)_{pair_i}^*$$

$$PDz(\phi)_{pair_i} = E_x(\phi)_{pair_i} \times H_y(\phi)_{pair_i}^* - E_y(\phi)_{pair_i} \times H_x(\phi)_{pair_i}^*$$

$$PD(\phi) = \frac{1}{2} \sqrt{\text{Re}\{PDx(\phi)\}_{pair_i}^2 + \text{Re}\{PDy(\phi)\}_{pair_i}^2 + \text{Re}\{PDz(\phi)\}_{pair_i}^2}$$

Sweep  $\phi$  from 0 degree to 360 degree to find the highest PD (out of low, mid, and high channel) and its corresponding  $\phi$ ,  $\phi_{worstcase}$ , for all the beam pairs specified in the *codebook\_sim*. The worst-case scaling factor  $s(i)$  for beam pair should be determined with  $\phi(i)_{worstcase}$ .

## B Simulated Input Power Limit

Table B-1 lists input power limit per channel per band for all the beams that EUT supports.

**Table B-1: Simulated *input.power.limit* for n258, n260, and n261**

n258					n260					n261				
Paired ID (Beam Pair)	Beam ID	Low	Mid	High	Paired ID (Beam Pair)	Beam ID	Low	Mid	High	Paired ID (Beam Pair)	Beam ID	Low	Mid	High
N/A	0	1.67	1.94	2.38	N/A	0	1.95	2.12	2.14	N/A	0	2.42	2.71	2.86
	1	1.85	2.43	2.70		1	2.13	1.85	1.40		1	2.54	2.51	2.87
	2	4.03	4.46	4.63		2	5.05	4.05	4.14		2	5.17	5.66	5.93
	3	2.88	2.77	2.66		3	2.21	2.04	2.16		3	2.85	2.82	2.76
	4	2.24	2.44	2.17		4	1.68	1.61	1.44		4	2.05	2.23	2.57
	5	4.71	5.22	4.86		5	2.33	2.80	2.69		5	2.83	2.80	2.82
	6	1.63	1.80	2.17		6	2.23	2.80	2.35		6	2.92	2.46	2.38
	7	3.87	3.66	3.37		7	2.18	3.45	3.02		7	4.19	4.57	4.61
	8	1.71	1.38	1.25		8	2.43	2.92	2.59		8	2.54	2.43	2.96
	9	3.79	3.52	3.72		9	3.28	3.25	3.56		9	3.22	3.01	2.90
	10	2.21	2.02	1.66		10	2.58	2.09	2.63		10	2.57	2.53	2.13
	11	3.75	4.27	4.07		11	4.52	3.18	4.29		11	3.56	4.39	5.04
	12	4.53	4.23	4.48		12	3.79	5.14	4.57		12	5.17	4.15	4.29
	13	5.84	6.57	7.19		13	4.12	3.85	3.94		13	7.70	7.73	7.64
	14	5.38	5.04	5.37		14	3.56	3.37	3.82		14	4.25	3.97	4.72
	15	4.40	4.72	4.98		15	5.42	5.17	4.22		15	4.88	5.26	5.29
	16	4.18	4.66	4.44		16	3.69	3.60	2.99		16	4.61	5.06	5.61
	17	5.40	5.78	6.09		17	3.35	2.78	2.46		17	5.77	6.29	7.12
	18	5.39	6.03	6.36		18	3.88	3.19	2.55		18	5.70	6.00	6.99
	19	4.34	5.56	4.90		19	4.25	4.04	3.13		19	3.68	3.62	4.54
	20	6.71	7.49	7.30		20	7.44	6.04	6.68		20	7.56	8.19	8.63
	21	8.60	8.62	8.52		21	5.52	5.72	6.55		21	8.17	8.78	8.94
	22	6.28	6.11	6.25		22	6.26	6.73	6.12		22	7.92	8.11	8.30
	23	9.34	10.83	10.81		23	3.17	4.38	4.09		23	7.31	7.42	7.85
	24	5.31	5.96	6.63		24	4.71	4.30	4.20		24	7.01	7.14	7.24
	25	6.02	4.82	4.35		25	3.10	3.33	3.78		25	7.53	7.51	7.34
	26	4.00	4.27	4.56		26	5.12	5.94	4.95		26	5.24	5.63	5.64
	27	4.94	5.34	5.34		27	3.40	3.13	2.77		27	4.86	5.33	5.91
	28	5.44	5.99	6.36		28	3.65	2.96	2.47		28	5.84	6.29	7.19
	29	5.03	6.08	6.04		29	4.21	3.90	3.00		29	5.22	5.35	6.36
	30	8.97	8.40	8.07		30	7.76	6.41	8.21		30	7.70	8.35	8.74
	31	9.68	10.42	10.34		31	5.58	5.45	6.19		31	8.18	8.65	8.70
	32	9.39	9.14	7.97		32	8.72	5.90	8.11		32	6.73	6.24	6.09
	33	13.58	12.77	12.27		33	10.33	9.72	9.43		33	17.24	15.56	15.77
	34	14.99	15.70	16.16		34	9.95	12.43	12.43		34	17.09	16.60	15.92
	35	13.99	14.94	14.51		35	9.71	12.72	12.09		35	19.97	18.96	17.61
	36	11.71	11.81	13.57		36	9.00	10.46	9.57		36	14.70	15.16	15.16
	37	6.26	6.48	8.86		37	10.92	9.53	8.65		37	13.09	12.12	13.52
	38	21.76	21.27	20.66		38	10.65	10.66	9.81		38	20.53	21.52	23
	39	19.32	20.07	19.72		39	11.20	8.73	10.25		39	16.26	17.89	18.87
	40	18.98	19.97	19.37		40	15.93	17.53	15.59		40	17.37	18.69	17.25
	41	16.90	19.53	20.86		41	15.79	15.60	17.63		41	16.91	16.93	17.33
	42	17.69	18.46	18.01		42	13.68	14.39	18.00		42	18.69	19.52	19.73
	43	16.25	16.22	16.41		43	10.10	10.53	10.32		43	16.63	16.45	16.31
	44	14.30	15.60	15.57		44	10.19	13.15	13.43		44	18.99	18.33	17.06
45	14.07	13.67	13.97	45	8.69	11.46	10.64	45	18.48	18.11	17.71			
46	8.62	9.05	11.65	46	10.23	9.62	8.73	46	14.42	14.22	15.12			
47	21.08	20.92	20.70	47	11.20	8.61	9.42	47	18.47	19.81	21.21			
48	19.39	19.97	19.27	48	13.68	13.40	14.44	48	16.25	16.81	15.73			
49	17.28	19.12	19.08	49	13.60	16.78	15.11	49	17.40	18.23	18.19			
50	18.03	19.64	20.81	50	18.51	17.07	19.80	50	18.05	17.85	18.09			
128	1.76	2.28	2.37	128	2.05	2.24	2.19	128	2.26	2.25	2.38			
129	2.59	2.14	2.53	129	1.50	1.33	0.94	129	2.91	2.55	2.47			
130	4.50	4.76	4.99	130	3.75	4.20	3.74	130	4.07	5.28	5.54			
131	1.18	1.22	1.98	131	2.76	2.93	2.31	131	2.98	3.07	3.00			
132	2.23	2.78	2.53	132	1.78	1.47	1.03	132	3.01	3.01	2.40			
133	3.88	3.53	3.35	133	3.49	2.72	2.53	133	4.51	4.73	4.77			
134	2.25	1.62	1.23	134	2.29	2.90	2.49	134	3.14	3.37	3.35			
135	2.89	3.54	3.65	135	3.19	2.32	2.20	135	3.51	3.52	3.65			
136	1.54	2.24	2.44	136	2.24	2.64	2.67	136	2.67	2.38	2.57			
137	2.80	3.60	3.16	137	3.29	3.24	2.91	137	4.34	4.16	3.76			
138	2.33	1.91	1.47	138	2.17	2.61	2.69	138	2.15	2.73	2.80			
139	3.61	3.52	3.71	139	3.57	3.69	2.88	139	1.66	3.26	3.52			
140	5.41	5.93	5.01	140	2.92	3.38	3.38	140	4.96	5.40	6.04			
141	2.09	3.10	3.82	141	5.62	6.88	6.13	141	7.62	7.41	7.98			
142	5.07	5.57	5.08	142	4.84	6.26	6.19	142	4.93	4.64	4.17			
143	1.68	1.65	2.11	143	5.32	5.60	4.24	143	6.26	6.17	5.62			
144	5.43	4.45	3.67	144	3.51	2.73	1.76	144	6.69	5.75	4.68			
145	5.96	5.82	5.95	145	2.85	2.74	1.95	145	6.84	6.64	5.72			

n258					n260					n261				
Paired ID (Beam Pair)	Beam ID	Low	Mid	High	Paired ID (Beam Pair)	Beam ID	Low	Mid	High	Paired ID (Beam Pair)	Beam ID	Low	Mid	High
N/A	146	5.13	5.90	6.66	N/A	146	3.18	2.83	2.02	N/A	146	6.58	6.64	5.83
	147	3.49	4.50	5.43		147	3.60	2.77	1.80		147	4.61	4.71	4.65
	148	5.75	6.39	6.92		148	7.66	8.00	7.06		148	9.76	10.12	9.56
	149	8.43	8.95	9.52		149	6.31	5.97	5.10		149	8.54	10.25	10.33
	150	6.12	6.36	6.91		150	8.11	6.37	6.32		150	7.17	9.42	10.49
	151	7.50	6.91	6.36		151	7.37	6.17	6.24		151	5.83	6.97	7.45
	152	1.89	2.88	3.47		152	3.24	3.68	3.83		152	5.87	5.49	5.42
	153	4.28	3.43	3.81		153	6.17	6.30	5.25		153	6.08	6.95	7.8
	154	3.77	2.99	3.16		154	5.33	6.32	4.57		154	4.81	5.76	6.57
	155	6.00	5.11	4.57		155	3.22	2.70	1.80		155	7.05	6.48	5.42
	156	5.48	5.93	6.51		156	2.85	2.75	1.97		156	6.29	6.53	5.83
	157	4.12	5.16	6.07		157	3.37	2.86	1.98		157	4.98	5.43	5.2
	158	7.23	7.91	8.56		158	7.16	7.03	5.95		158	10.42	11.68	12.24
	159	10.06	9.83	9.87		159	5.43	4.75	3.70		159	7.24	9.57	10.37
	160	9.00	8.18	7.51		160	7.57	7.47	7.02		160	7.67	9.5	10.46
	161	9.79	9.76	9.72		161	10.28	10.18	10.67		161	12.13	12.86	14.64
	162	12.06	11.95	12.44		162	12.46	13.15	11.21		162	15.89	15.3	15.07
	163	11.58	11.21	10.44		163	14.17	17.07	13.39		163	10.74	11.82	13.32
	164	6.79	6.44	8.45		164	14.02	15.73	13.24		164	12.45	12.37	12.8
	165	7.22	8.21	10.21		165	10.37	13.33	11.28		165	11.43	11.96	12.21
	166	17.00	20.62	20.92		166	15.29	13.64	13.53		166	24.55	25.9	25.73
	167	16.52	20.01	20.76		167	11.45	10.44	8.72		167	22.02	24.45	23.3
	168	16.72	19.49	19.67		168	14.75	13.25	11.08		168	13.03	15.69	15.25
	169	17.37	18.69	18.23		169	15.07	13.65	12.30		169	11.73	13.56	13.79
	170	15.86	17.72	16.30		170	14.83	13.32	13.50		170	17.15	19.63	20.53
	171	10.95	11.54	12.52		171	11.47	11.24	11.49		171	14.81	15.64	16.76
	172	12.81	12.27	10.91		172	13.60	15.92	12.43		172	14.65	14.82	15.37
	173	9.87	9.22	9.85		173	14.02	16.73	13.53		173	11.39	11.94	13.24
	174	6.18	6.57	8.86		174	12.56	14.72	12.10		174	11.00	11.37	12.02
	175	16.63	20.19	20.85		175	12.38	11.98	11.85		175	25.15	27.08	26.1
176	15.94	19.27	19.77	176	11.86	9.43	8.30	176	17.19	19.47	18.87			
177	15.45	17.99	18.84	177	15.59	15.86	13.52	177	10.93	13.76	13.67			
178	19.40	20.17	18.04	178	16.04	12.50	12.73	178	15.81	17.35	17.58			

n258			n260			n261		
Paired ID (Beam Pair)	Beam ID	Worst Case Sim Beam Pair	Paired ID (Beam Pair)	Beam ID	Worst Case Sim Beam Pair	Paired ID (Beam Pair)	Beam ID	Worst Case Sim Beam Pair
128	0	6.07	128	0	5.38	128	0	5.64
129	1	5.42	129	1	3.80	129	1	5.82
130	2	12.95	130	2	9.66	130	2	12.28
131	3	5.57	131	3	5.85	131	3	6.74
132	4	5.43	132	4	3.61	132	4	5.95
133	5	10.22	133	5	6.67	133	5	9.25
134	6	4.82	134	6	6.93	134	6	6.34
135	7	8.22	135	7	6.28	135	7	9.15
136	8	5.22	136	8	6.62	136	8	6.06
137	9	8.05	137	9	7.55	137	9	8.13
138	10	4.92	138	10	6.24	138	10	6.37
139	11	9.62	139	11	9.30	139	11	9.49
140	12	11.11	140	12	9.82	140	12	10.86
141	13	12.80	141	13	10.19	141	13	16.56
142	14	9.99	142	14	10.40	142	14	10.03
143	15	8.53	143	15	12.40	143	15	13.05
144	16	10.22	144	16	7.80	144	16	12.17
145	17	12.64	145	17	6.62	145	17	13.55
146	18	13.60	146	18	7.51	146	18	13.40
147	19	10.87	147	19	7.96	147	19	9.92
148	20	17.34	148	20	16.87	148	20	20.05
149	21	15.83	149	21	11.16	149	21	21.53
150	22	15.39	150	22	16.09	150	22	19.61
151	23	21.44	151	23	11.67	151	23	13.96
152	24	11.95	152	24	8.44	152	24	13.01
153	25	11.39	153	25	10.18	153	25	17.40
154	26	8.96	154	26	14.53	154	26	10.27
155	27	11.53	155	27	7.24	155	27	12.57
156	28	13.57	156	28	7.03	156	28	13.58
157	29	12.41	157	29	7.82	157	29	11.65
158	30	16.73	158	30	17.50	158	30	21.87
159	31	27.07	159	31	12.34	159	31	20.66
160	32	22.36	160	32	13.63	160	32	17.95
161	33	28.38	161	33	23.61	161	33	35.52
162	34	29.25	162	34	28.39	162	34	37.20
163	35	29.63	163	35	31.16	163	35	33.84
164	36	26.76	164	36	27.05	164	36	30.40
165	37	21.10	165	37	27.11	165	37	29.58
166	38	50.91	166	38	32.67	166	38	53.2
167	39	53.92	167	39	28.37	167	39	48.31
168	40	53.37	168	40	35.62	168	40	43.33
169	41	49.73	169	41	34.73	169	41	36.38
170	42	39.60	170	42	33.91	170	42	43.62
171	43	33.26	171	43	25.23	171	43	37.39
172	44	30.36	172	44	29.98	172	44	36.94
173	45	29.07	173	45	29.38	173	45	33.12
174	46	24.00	174	46	27.89	174	46	30.41
175	47	52.83	175	47	29.89	175	47	53.94
176	48	51.15	176	48	28.97	176	48	43
177	49	50.84	177	49	35.89	177	49	38.61
178	50	47.03	178	50	41.17	178	50	41.13