

H. Modulation Interference Factor (MIF) Measurements using MAIA and DASY6

H.1. Introduction

The DUT supports 5G NR TDD Power Class 2. Manufacturer/OEM declares operating duty cycle to be 50% for 5G NR (FR1) TDD Power Class 2. The UID Summary only shows MIF values for 5G NR TDD bands operating at 100% duty cycle. Therefore, the test lab performed MIF measurements for 5G NR TDD Power Class 2 at the lower duty cycle of 50%.

Please refer to §H.3 for *MIF Measured Results* and §H.4 for *Duty Cycle Measurements*. These Duty cycles will be used for HAC RF_{AIPL} and RF_{AIL} evaluations.

H.2. Test Setup

Modulation Interference Factor (MIF) measurements were performed in accordance with ANSI C.63.19 2019 Annex D §D.7. SPEAG software and test equipment was used to perform the MIF measurements. MIF measurements test procedure using SPEAG SW and equipment is outlined in *SPEAG DASY6 Module HAC System Handbook §7.1 MIF Measurements with MAIA*. Details of test equipment and test procedure used for MIF measurements are detailed below.

H.2.1. Modulation and Interference Analyzer (MAIA)

MAIA is a hardware interface for evaluating the modulation and audio interference characteristics of RF signals in the frequency range 698–6000 MHz. DASY6 evaluates the time-domain and frequency-domain properties of the uplink signal transmitted by the DUT during SAR measurement with MAIA. It uses USB-powered active electronics to identify the modulation of the DUT. It can be operated with the over-the-air interface using the built-in ultra-broadband planar log spiral antenna (698–6000 MHz) or in the conducted mode using the coaxial SMA 50W connector (300–6000 MHz).

Figure 1: Modulation and Interference Analyzer (MAIA)




H.2.2. MIF Measurements using DASY6

Measurements of the MIF value is conducted using the MAIA in conjunction with DASY6 HAC Module Notebook. The MAIA supports two modes of measurement: radiated and conducted. The radiated option uses the built in wide-band antenna and the conducted uses the SMA connector input on the rear of the MAIA.

MIF measurements were taken using the conducted option. Test procedure to measure MIF vale is as follows:

1. Measurements with MAIA are done in a separate HAC notebook module. This module can be started from within DASY6 Module HAC by clicking the HAC Notebook drop-down and choosing "MIF Measurements".
2. The active MAIA can be set in the drop-down list of available MAIA's. Should the MAIA not be available, the "Detect MAIA" button can be clicked which will trigger a search for connected hardware in DASY6.
3. The measurement can be started by clicking "Start measurement" which will continuously measure the MIF. The MIF will take a while to stabilize from which point the MIF can be noted. To stop the measurement the "Stop measurement" button is used.

Figure 2: MIF Measurements in DASY6

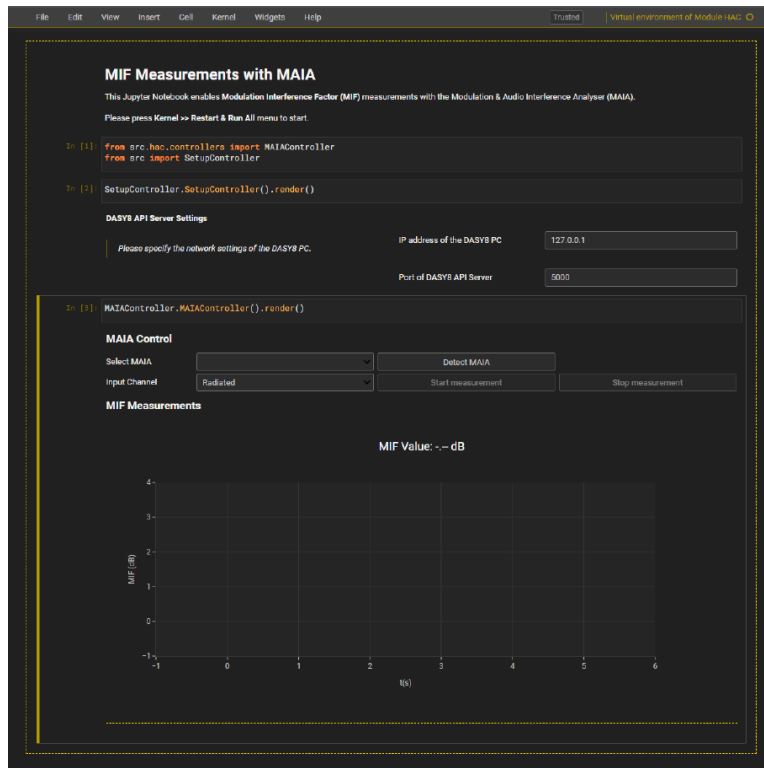

H.3. MIF Measured Results

Measured MIF (dB)						
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
100	30	DFT-s	$\pi/2$ BPSK	1	1	-1.29
				135	69	-1.16
			QPSK	1	1	-1.35
		CP	QPSK	135	69	-1.34
				1	1	-1.96
			QPSK	137	68	-1.98
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
90	30	DFT-s	$\pi/2$ BPSK	1	1	-1.27
				120	63	-1.16
			QPSK	1	1	-1.38
		CP	QPSK	120	63	-1.36
				1	1	-1.80
			QPSK	123	61	-1.96
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
80	30	DFT-s	$\pi/2$ BPSK	1	1	-1.24
				108	54	-1.22
			QPSK	1	1	-1.31
		CP	QPSK	108	54	-1.44
				1	1	-1.80
			QPSK	109	54	-1.95
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
70	30	DFT-s	$\pi/2$ BPSK	1	1	-1.31
				90	50	-1.29
			QPSK	1	1	-1.42
		CP	QPSK	90	50	-1.47
				1	1	-1.85
			QPSK	95	47	-1.99
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
60	30	DFT-s	$\pi/2$ BPSK	1	1	-1.31
				81	40	-1.20
			QPSK	1	1	-1.37
		CP	QPSK	81	40	-1.37
				1	1	-1.82
			QPSK	81	40	-2.04
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
50	30	DFT-s	$\pi/2$ BPSK	1	1	-1.27
				64	35	-1.21
			QPSK	1	1	-1.37
		CP	QPSK	64	35	-1.47
				1	1	-1.77
			QPSK	67	33	-2.03
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
40	30	DFT-s	$\pi/2$ BPSK	1	1	-1.27
				50	28	-1.23
			QPSK	1	1	-1.41
		CP	QPSK	50	28	-1.37
				1	1	-1.85
			QPSK	53	26	-1.99
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
30	30	DFT-s	$\pi/2$ BPSK	1	1	-1.28
				36	21	-1.27
			QPSK	1	1	-1.38
		CP	QPSK	36	21	-1.45
				1	1	-1.88
			QPSK	39	19	-1.97
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
20	30	DFT-s	$\pi/2$ BPSK	1	1	-1.25
				25	13	-1.25
			QPSK	1	1	-1.46
		CP	QPSK	25	13	-1.40
				1	1	-1.90
			QPSK	25	13	-1.98
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
15	30	DFT-s	$\pi/2$ BPSK	1	1	-1.31
				18	10	-1.23
			QPSK	1	1	-1.37
		CP	QPSK	18	10	-1.35
				1	1	-1.84
			QPSK	19	9	-2.04
BW (MHz)	SCS (kHz)	OFDM Modulation Scheme	Mode	RB Allocation	RB Offset	PC2
						518598.00
						2592.99 MHz
10	30	DFT-s	$\pi/2$ BPSK	1	1	-1.27
				12	6	-1.19
			QPSK	1	1	-1.38
		CP	QPSK	12	6	-1.36
				1	1	-1.84
			QPSK	12	6	-1.89

Notes:

- 5G NR TDD band n41 was used for Power Class 2 and Power Class 1.5 MIF measurements.
 - FTM was used for 5G NR TDD MIF measurements to ensure correct operating Duty Cycle was used for measurements.
- Worst Case measured MIF values will be used HAC RF_{A1PL} and RF_{A1L} evaluations.
 - Worst Case MIF vales for Power Class 2:
 - DFT-s-OFDM $\pi/2$ BPSK: -1.16 dB
 - DFT-s-OFDM QPSK: -1.31 dB
 - CP-OFDM QPSK: -1.77 dB

H.4. Duty Cycle Measurements

Duty cycle measurements were performed for 5G NR TDD Power Class 2 and Power Class 1.5 to confirm DUTs operating duty cycle for these respective power classes. Measured Duty cycles will be used for HAC RF_{AIPL} and RF_{AIL} evaluations.

Figure 3: 5G NR TDD Power Class 2, 1% RB



Figure 4: 5G NR TDD Power Class 2, 50% RB



Duty Cycle Measured Results

Technology	Mode	RB Allocation	Time On (ms)	Period (ms)	Measured Duty Cycle
5G NR TDD PC2	OFDM	1%	0.496	0.9996	50%
5G NR TDD PC2	OFDM	50%	0.498	0.9995	50%

Note(s):

Duty Cycle = (Time on / period) * 100%.