



**FCC 47 CFR PART 15 SUBPART E**

**CERTIFICATION TEST REPORT**

**FOR**

**TABLET DEVICE**

**MODEL NUMBER: A1538**

**FCC ID: BCGA1538**

**REPORT NUMBER: 14U19186-E5, REVISION C**

**ISSUE DATE: JULY 20, 2015**

*Prepared for*

**APPLE, INC.**

**1 INFINITE LOOP**

**CUPERTINO, CA 95014, U.S.A.**

*Prepared by*

**UL VERIFICATION SERVICES INC.**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 771-1000**

**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

---

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	03/27/2015	Initial Issue	M. Mekuria
A	05/08/2015	Revised report to address TCB's questions	T. Chu
B	06/01/2015	Revised Section 2	T. Chu
C	07/20/2015	Corrected DC Corr Factor on Section 8.22 and Section 8.40 VHT80 output power and updated related Section 5.2.	J. Vang

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>12</b>
<b>2. TEST METHODOLOGY .....</b>	<b>13</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>13</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>13</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	13
4.2. SAMPLE CALCULATION .....	13
4.3. MEASUREMENT UNCERTAINTY.....	14
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>14</b>
5.1. DESCRIPTION OF EUT .....	14
5.2. MAXIMUM OUTPUT POWER .....	15
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	18
5.4. SOFTWARE AND FIRMWARE.....	18
5.5. WORST-CASE CONFIGURATION AND MODE.....	19
5.6. DESCRIPTION OF TEST SETUP.....	20
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>24</b>
<b>7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS .....</b>	<b>25</b>
7.1. ON TIME AND DUTY CYCLE.....	25
7.2. DUTY CYCLE PLOTS .....	26
7.3. MEASUREMENT METHODS.....	32
<b>8. ANTENNA PORT TEST RESULTS.....</b>	<b>33</b>
8.1. 802.11n HT20 SISO MODE IN THE 5.2 GHz BAND ANTENNA B.....	33
8.1.1. 26 dB BANDWIDTH.....	33
8.1.2. 99% BANDWIDTH.....	36
8.1.3. AVERAGE POWER.....	39
8.1.4. OUTPUT POWER AND PSD.....	40
8.2. 802.11n HT20 SISO MODE IN THE 5.2 GHz BAND ANTENNA A.....	44
8.2.1. 26 dB BANDWIDTH.....	44
8.2.2. 99% BANDWIDTH.....	47
8.2.3. AVERAGE POWER.....	50
8.2.4. OUTPUT POWER AND PSD.....	51
8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND.....	55
8.3.1. 26 dB BANDWIDTH.....	55
8.3.2. 99% BANDWIDTH.....	59
8.3.3. AVERAGE POWER.....	63
8.3.4. OUTPUT POWER AND PSD.....	64

---

8.4.	802.11n HT20 2Tx STBC MODE IN THE 5.2 GHz BAND.....	70
8.4.1.	26 dB BANDWIDTH.....	70
8.4.2.	99% BANDWIDTH.....	74
8.4.3.	AVERAGE POWER.....	78
8.4.4.	OUTPUT POWER AND PSD.....	79
8.5.	802.11n HT40 SISO MODE IN THE 5.2 GHz BAND ANTENNA B.....	85
8.5.1.	26 dB BANDWIDTH.....	85
8.5.2.	99% BANDWIDTH.....	87
8.5.3.	AVERAGE POWER.....	89
8.5.4.	OUTPUT POWER AND PSD.....	90
8.6.	802.11n HT40 SISO MODE IN THE 5.2 GHz BAND ANTENNA A.....	93
8.6.1.	26 dB BANDWIDTH.....	93
8.6.2.	99% BANDWIDTH.....	95
8.6.3.	AVERAGE POWER.....	97
8.6.4.	OUTPUT POWER AND PSD.....	98
8.7.	802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND.....	101
8.7.1.	26 dB BANDWIDTH.....	101
8.7.2.	99% BANDWIDTH.....	104
8.7.3.	AVERAGE POWER.....	107
8.7.4.	OUTPUT POWER AND PSD.....	108
8.8.	802.11n HT40 2Tx STBC MODE IN THE 5.2 GHz BAND.....	113
8.8.1.	26 dB BANDWIDTH.....	113
8.8.2.	99% BANDWIDTH.....	116
8.8.3.	AVERAGE POWER.....	119
8.8.4.	OUTPUT POWER AND PSD.....	120
8.9.	802.11ac VHT80 SISO MODE IN THE 5.2 GHz BAND ANTENNA B.....	125
8.9.1.	26 dB BANDWIDTH.....	125
8.9.2.	99% BANDWIDTH.....	127
8.9.3.	AVERAGE POWER.....	129
8.9.4.	OUTPUT POWER AND PSD.....	130
8.10.	802.11ac VHT80 SISO MODE IN THE 5.2 GHz BAND ANTENNA A.....	133
8.10.1.	26 dB BANDWIDTH.....	133
8.10.2.	99% BANDWIDTH.....	135
8.10.3.	AVERAGE POWER.....	137
8.10.4.	OUTPUT POWER AND PSD.....	138
8.11.	802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND.....	141
8.11.1.	26 dB BANDWIDTH.....	141
8.11.2.	99% BANDWIDTH.....	143
8.11.3.	AVERAGE POWER.....	145
8.11.4.	OUTPUT POWER AND PSD.....	146
8.12.	802.11n HT20 SISO MODE IN THE 5.3 GHz BAND ANTENNA B.....	150
8.12.1.	26 dB BANDWIDTH.....	150
8.12.2.	99% BANDWIDTH.....	153
8.12.3.	AVERAGE POWER.....	156
8.12.4.	OUTPUT POWER AND PSD.....	157
8.13.	802.11n HT20 SISO MODE IN THE 5.3 GHz BAND ANTENNA A.....	161
8.13.1.	26 dB BANDWIDTH.....	161
8.13.2.	99% BANDWIDTH.....	164

---

8.13.3.	AVERAGE POWER .....	167
8.13.4.	OUTPUT POWER AND PSD .....	168
8.14.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	172
8.14.1.	26 dB BANDWIDTH .....	172
8.14.2.	99% BANDWIDTH .....	176
8.14.3.	AVERAGE POWER .....	180
8.14.4.	OUTPUT POWER AND PSD .....	181
8.15.	<i>802.11n HT20 2Tx STBC MODE IN THE 5.3 GHz BAND</i> .....	186
8.15.1.	26 dB BANDWIDTH .....	186
8.15.2.	99% BANDWIDTH .....	190
8.15.3.	AVERAGE POWER .....	194
8.15.4.	OUTPUT POWER AND PSD .....	195
8.16.	<i>802.11n HT40 SISO MODE IN THE 5.3 GHz BAND ANTENNA B</i> .....	200
8.16.1.	26 dB BANDWIDTH .....	200
8.16.2.	99% BANDWIDTH .....	202
8.16.3.	AVERAGE POWER .....	204
8.16.4.	OUTPUT POWER AND PSD .....	205
8.17.	<i>802.11n HT40 SISO MODE IN THE 5.3 GHz BAND ANTENNA A</i> .....	208
8.17.1.	26 dB BANDWIDTH .....	208
8.17.2.	99% BANDWIDTH .....	210
8.17.3.	AVERAGE POWER .....	212
8.17.4.	OUTPUT POWER AND PSD .....	213
8.18.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	216
8.18.1.	26 dB BANDWIDTH .....	216
8.18.2.	99% BANDWIDTH .....	219
8.18.3.	AVERAGE POWER .....	222
8.18.4.	OUTPUT POWER AND PSD .....	223
8.19.	<i>802.11n HT40 2Tx STBC MODE IN THE 5.3 GHz BAND</i> .....	227
8.19.1.	26 dB BANDWIDTH .....	227
8.19.2.	99% BANDWIDTH .....	230
8.19.3.	AVERAGE POWER .....	233
8.19.4.	OUTPUT POWER AND PSD .....	234
8.20.	<i>802.11ac VHT80 SISO MODE IN THE 5.3 GHz BAND ANTENNA B</i> .....	238
8.20.1.	26 dB BANDWIDTH .....	238
8.20.2.	99% BANDWIDTH .....	240
8.20.3.	AVERAGE POWER .....	242
8.20.4.	OUTPUT POWER AND PSD .....	243
8.21.	<i>802.11ac VHT80 SISO MODE IN THE 5.3 GHz BAND ANTENNA A</i> .....	246
8.21.1.	26 dB BANDWIDTH .....	246
8.21.2.	99% BANDWIDTH .....	248
8.21.3.	AVERAGE POWER .....	250
8.21.4.	OUTPUT POWER AND PSD .....	251
8.22.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	254
8.22.1.	26 dB BANDWIDTH .....	254
8.22.2.	99% BANDWIDTH .....	256
8.22.3.	AVERAGE POWER .....	258
8.22.4.	OUTPUT POWER AND PSD .....	259

8.23.	<i>802.11n HT20 SISO MODE IN THE 5.6 GHz BAND ANTENNA B</i>	262
8.23.1.	26 dB BANDWIDTH	262
8.23.2.	99% BANDWIDTH	265
8.23.3.	AVERAGE POWER	268
8.23.4.	OUTPUT POWER AND PSD	269
8.24.	<i>802.11n HT20 SISO MODE IN THE 5.6 GHz BAND ANTENNA A</i>	278
8.24.1.	26 dB BANDWIDTH	278
8.24.2.	99% BANDWIDTH	281
8.24.3.	AVERAGE POWER	284
8.24.4.	OUTPUT POWER AND PSD	285
8.25.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND</i>	294
8.25.1.	26 dB BANDWIDTH	294
8.25.2.	99% BANDWIDTH	299
8.25.3.	AVERAGE POWER	304
8.25.4.	OUTPUT POWER AND PSD	305
8.26.	<i>802.11n HT40 SISO MODE IN THE 5.6 GHz BAND ANTENNA B</i>	316
8.26.1.	26 dB BANDWIDTH	316
8.26.2.	99% BANDWIDTH	319
8.26.3.	AVERAGE POWER	322
8.26.4.	OUTPUT POWER AND PSD	323
8.27.	<i>802.11n HT40 SISO MODE IN THE 5.6 GHz BAND ANTENNA A</i>	332
8.27.1.	26 dB BANDWIDTH	332
8.27.2.	99% BANDWIDTH	335
8.27.3.	AVERAGE POWER	338
8.27.4.	OUTPUT POWER AND PSD	339
8.28.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND</i>	348
8.28.1.	26 dB BANDWIDTH	348
8.28.2.	99% BANDWIDTH	353
8.28.3.	AVERAGE POWER	358
8.28.4.	OUTPUT POWER AND PSD	359
8.29.	<i>802.11ac VHT80 SISO MODE IN THE 5.6 GHz BAND ANTENNA B</i>	370
8.29.1.	26 dB BANDWIDTH	370
8.29.2.	99% BANDWIDTH	373
8.29.3.	AVERAGE POWER	376
8.29.4.	OUTPUT POWER AND PSD	377
8.30.	<i>802.11ac VHT80 SISO MODE IN THE 5.6 GHz BAND ANTENNA A</i>	385
8.30.1.	26 dB BANDWIDTH	385
8.30.2.	99% BANDWIDTH	388
8.30.3.	AVERAGE POWER	391
8.30.4.	OUTPUT POWER AND PSD	392
8.31.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND</i>	400
8.31.1.	26 dB BANDWIDTH	400
8.31.2.	99% BANDWIDTH	405
8.31.3.	AVERAGE POWER	410
8.31.4.	OUTPUT POWER AND PSD	411
8.32.	<i>802.11n HT20 SISO MODE IN THE 5.8 GHz BAND ANTENNA B</i>	421
8.32.1.	6 dB BANDWIDTH	421
8.32.2.	26 dB BANDWIDTH	424

---

8.32.3.	99% BANDWIDTH .....	427
8.32.4.	AVERAGE POWER .....	430
8.32.5.	OUTPUT POWER.....	431
8.32.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD).....	433
8.33.	<i>802.11n HT20 SISO MODE IN THE 5.8 GHz BAND ANTENNA A .....</i>	<i>437</i>
8.33.1.	6 dB BANDWIDTH .....	437
8.33.2.	26 dB BANDWIDTH .....	440
8.33.3.	99% BANDWIDTH .....	443
8.33.4.	AVERAGE POWER .....	446
8.33.5.	OUTPUT POWER.....	447
8.33.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD).....	449
8.34.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND .....</i>	<i>453</i>
8.34.1.	6 dB BANDWIDTH .....	453
8.34.2.	26 dB BANDWIDTH .....	457
8.34.3.	99% BANDWIDTH .....	461
8.34.4.	AVERAGE POWER .....	465
8.34.5.	OUTPUT POWER.....	466
8.34.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD).....	468
8.35.	<i>802.11n HT40 SISO MODE IN THE 5.8 GHz BAND ANTENNA B .....</i>	<i>473</i>
8.35.1.	6 dB BANDWIDTH .....	473
8.35.2.	26 dB BANDWIDTH .....	475
8.35.3.	99% BANDWIDTH .....	477
8.35.4.	AVERAGE POWER .....	479
8.35.5.	OUTPUT POWER.....	480
8.35.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD).....	482
8.36.	<i>802.11n HT40 SISO MODE IN THE 5.8 GHz BAND ANTENNA A .....</i>	<i>485</i>
8.36.1.	6 dB BANDWIDTH .....	485
8.36.2.	26 dB BANDWIDTH .....	487
8.36.3.	99% BANDWIDTH .....	489
8.36.4.	AVERAGE POWER .....	491
8.36.5.	OUTPUT POWER.....	492
8.36.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD).....	494
8.37.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND .....</i>	<i>497</i>
8.37.1.	6 dB BANDWIDTH .....	497
8.37.2.	26 dB BANDWIDTH .....	500
8.37.3.	99% BANDWIDTH .....	503
8.37.4.	AVERAGE POWER .....	506
8.37.5.	OUTPUT POWER.....	507
8.37.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD).....	509
8.38.	<i>802.11ac VHT80 SISO MODE IN THE 5.8 GHz BAND ANTENNA B .....</i>	<i>513</i>
8.38.1.	6 dB BANDWIDTH .....	513
8.38.2.	26 dB BANDWIDTH .....	515
8.38.3.	99% BANDWIDTH .....	517
8.38.4.	AVERAGE POWER .....	519
8.38.5.	OUTPUT POWER.....	520
8.38.6.	Maximum Power Spectral Density (PSD) .....	522
8.39.	<i>802.11ac VHT80 SISO MODE IN THE 5.8 GHz BAND ANTENNA A .....</i>	<i>525</i>
8.39.1.	6 dB BANDWIDTH .....	525
8.39.2.	26 dB BANDWIDTH .....	527

---

8.39.3.	99% BANDWIDTH .....	529
8.39.4.	AVERAGE POWER .....	531
8.39.5.	OUTPUT POWER.....	532
8.39.6.	Maximum Power Spectral Density (PSD) .....	534
8.40.	<i>802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND</i> .....	537
8.40.1.	6 dB BANDWIDTH .....	537
8.40.2.	26 dB BANDWIDTH .....	539
8.40.3.	99% BANDWIDTH .....	541
8.40.4.	AVERAGE POWER .....	543
8.40.5.	OUTPUT POWER.....	544
8.40.6.	Maximum Power Spectral Density (PSD) .....	546
<b>9.</b>	<b>RADIATED TEST RESULTS.....</b>	<b>550</b>
9.1.	<i>LIMITS AND PROCEDURE</i> .....	550
9.2.	<i>TX ABOVE 1 GHz 802.11n HT20 SISO MODE IN THE 5.2 GHz BAND</i> .....	551
9.2.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	551
9.2.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	553
9.2.3.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	555
9.2.4.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	557
9.3.	<i>TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	559
9.3.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	559
9.3.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	561
9.3.3.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	563
9.3.4.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	565
9.4.	<i>TX ABOVE 1 GHz 802.11n HT40 SISO MODE IN THE 5.2 GHz BAND</i> .....	567
9.4.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	567
9.4.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	569
9.4.3.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	571
9.5.	<i>TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND</i> .....	573
9.5.1.	RESTRICTED BANDEDGE (LOW CHANNEL).....	573
9.5.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	575
9.5.3.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	577
9.6.	<i>TX ABOVE 1 GHz 802.11ac VHT80 1TX SISO MODE IN THE 5.2 GHz BAND</i> .....	579
9.6.1.	RESTRICTED BANDEDGE (LOW CHANNEL, CH 42).....	579
9.6.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	581
9.7.	<i>TX ABOVE 1 GHz 802.11ac VHT80 2TX CDD MODE IN THE 5.2 GHz BAND</i> .....	583
9.7.1.	RESTRICTED BANDEDGE (LOW CHANNEL, CH 42).....	583
9.7.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	585
9.8.	<i>TX ABOVE 1 GHz 802.11n HT20 SISO MODE IN THE 5.3 GHz BAND</i> .....	587
9.8.1.	RESTRICTED BANDEDGE (HIGH CHANNEL) .....	587
9.8.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	589
9.8.3.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	591
9.8.4.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	593
9.9.	<i>TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND</i> .....	595
9.9.1.	RESTRICTED BANDEDGE (HIGH CHANNEL).....	595
9.9.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	597
9.9.3.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	599



---

9.9.4.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS.....	601
9.10.	<i>TX ABOVE 1 GHz 802.11n HT40 SISO MODE IN THE 5.3 GHz BAND.....</i>	<i>603</i>
9.10.1.	RESTRICTED BANDEDGE (HIGH CHANNEL) .....	603
9.10.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	605
9.10.3.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	607
9.11.	<i>TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND.....</i>	<i>609</i>
9.11.1.	RESTRICTED BANDEDGE (HIGH CHANNEL) .....	609
9.11.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	611
9.11.3.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	613
9.12.	<i>TX ABOVE 1 GHz 802.11ac VHT80 1TX SISO MODE IN THE 5.3 GHz BAND.....</i>	<i>615</i>
9.12.1.	RESTRICTED BANDEDGE (HIGH CHANNEL, CH 58) .....	615
9.12.2.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	617
9.13.	<i>TX ABOVE 1 GHz 802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND.....</i>	<i>619</i>
9.13.1.	RESTRICTED BANDEDGE (HIGH CHANNEL, CH 58) .....	619
9.13.2.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	621
9.14.	<i>TX ABOVE 1 GHz 802.11n HT20 SISO MODE IN THE 5.6 GHz BAND.....</i>	<i>623</i>
9.14.1.	RESTRICTED BANDEDGE (LOW CHANNEL) .....	623
9.14.2.	RESTRICTED BANDEDGE (HIGH CHANNEL) .....	625
9.14.3.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	627
9.14.4.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	629
9.14.5.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	631
9.14.6.	CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS .....	633
9.15.	<i>TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND.....</i>	<i>635</i>
9.15.1.	RESTRICTED BANDEDGE (LOW CHANNEL) .....	635
9.15.2.	RESTRICTED BANDEDGE (HIGH CHANNEL) .....	637
9.15.3.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	639
9.15.4.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	641
9.15.5.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	643
9.15.6.	CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS .....	645
9.16.	<i>TX ABOVE 1 GHz 802.11n HT40 SISO MODE IN THE 5.6 GHz BAND.....</i>	<i>647</i>
9.16.1.	RESTRICTED BANDEDGE (LOW CHANNEL) .....	647
9.16.2.	RESTRICTED BANDEDGE (HIGH CHANNEL) .....	649
9.16.3.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	651
9.16.4.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	653
9.16.5.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	655
9.16.6.	CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS .....	657
9.17.	<i>TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND.....</i>	<i>659</i>
9.17.1.	RESTRICTED BANDEDGE (LOW CHANNEL) .....	659
9.17.2.	RESTRICTED BANDEDGE (HIGH CHANNEL) .....	661
9.17.3.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	663
9.17.4.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	665
9.17.5.	HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	667
9.17.6.	CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS .....	669
9.18.	<i>TX ABOVE 1 GHz 802.11ac VHT80 1TX SISO MODE IN THE 5.6 GHz BAND.....</i>	<i>671</i>
9.18.1.	RESTRICTED BANDEDGE (LOW CHANNEL) .....	671
9.18.2.	LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	673
9.18.3.	MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS .....	675
9.18.4.	CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS .....	677

- 9.19. TX ABOVE 1 GHz 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND..... 679
  - 9.19.1. RESTRICTED BANDEDGE (LOW CHANNEL) ..... 679
  - 9.19.2. LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS ..... 681
  - 9.19.3. MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS ..... 683
  - 9.19.4. CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS ..... 685
- 9.20. TX ABOVE 1 GHz 802.11n HT20 SISO MODE IN THE 5.8 GHz BAND..... 687
  - 9.20.1. RESTRICTED BANDEDGE (LOW CHANNEL) ..... 687
  - 9.20.2. RESTRICTED BANDEDGE (HIGH CHANNEL) ..... 689
  - 9.20.3. HARMONICS AND SPURIOUS EMISSIONS ..... 691
  - 9.20.4. HARMONICS AND SPURIOUS EMISSIONS ..... 693
  - 9.20.5. HARMONICS AND SPURIOUS EMISSIONS ..... 695
- 9.21. TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND..... 697
  - 9.21.1. RESTRICTED BANDEDGE (LOW CHANNEL) ..... 697
  - 9.21.2. RESTRICTED BANDEDGE (HIGH CHANNEL) ..... 699
  - 9.21.3. HARMONICS AND SPURIOUS EMISSIONS ..... 701
  - 9.21.4. HARMONICS AND SPURIOUS EMISSIONS ..... 703
  - 9.21.5. HARMONICS AND SPURIOUS EMISSIONS ..... 705
- 9.22. TX ABOVE 1 GHz 802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND ..... 707
  - 9.22.1. RESTRICTED BANDEDGE (LOW CHANNEL) ..... 707
  - 9.22.2. RESTRICTED BANDEDGE (HIGH CHANNEL) ..... 709
  - 9.22.3. HARMONICS AND SPURIOUS EMISSIONS ..... 711
  - 9.22.4. HARMONICS AND SPURIOUS EMISSIONS ..... 713
- 9.23. TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND..... 715
  - 9.23.1. RESTRICTED BANDEDGE (LOW CHANNEL) ..... 715
  - 9.23.2. RESTRICTED BANDEDGE (HIGH CHANNEL) ..... 717
  - 9.23.3. HARMONICS AND SPURIOUS EMISSIONS ..... 719
  - 9.23.4. HARMONICS AND SPURIOUS EMISSIONS ..... 721
- 9.24. TX ABOVE 1 GHz 802.11ac 80MHz 1Tx SISO MODE IN THE 5.8 GHz BAND ..... 723
  - 9.24.1. RESTRICTED BANDEDGE (LOW) ..... 723
  - 9.24.2. RESTRICTED BANDEDGE (HIGH) ..... 725
  - 9.24.3. HARMONICS AND SPURIOUS EMISSIONS ..... 727
- 9.25. TX ABOVE 1 GHz 802.11ac 80Mhz 2Tx CDD MODE IN THE 5.8 GHz BAND..... 729
  - 9.25.1. RESTRICTED BANDEDGE (LOW) ..... 729
  - 9.25.2. RESTRICTED BANDEDGE (HIGH) ..... 731
  - 9.25.3. HARMONICS AND SPURIOUS EMISSIONS ..... 733
- 9.26. WORST-CASE BELOW 1 GHz ..... 735
- 9.27. WORST-CASE ABOVE 18 GHz..... 737
- 10. AC POWER LINE CONDUCTED EMISSIONS ..... 739**
- 11. DYNAMIC FREQUENCY SELECTION ..... 744**
  - 11.1. OVERVIEW..... 744
    - 11.1.1. LIMITS ..... 744
    - 11.1.2. TEST AND MEASUREMENT SYSTEM ..... 748
    - 11.1.3. SETUP OF EUT (CLIENT MODE)..... 751
    - 11.1.4. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE) ..... 752
    - 11.1.5. DESCRIPTION OF EUT..... 753

---

11.2.	<i>CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH</i> .....	755
11.2.1.	TEST CHANNEL.....	755
11.2.2.	RADAR WAVEFORM AND TRAFFIC .....	755
11.2.3.	OVERLAPPING CHANNEL TESTS .....	758
11.2.4.	MOVE AND CLOSING TIME.....	758
11.3.	<i>CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH</i> .....	762
11.3.1.	TEST CHANNEL.....	762
11.3.2.	RADAR WAVEFORM AND TRAFFIC .....	762
11.3.3.	OVERLAPPING CHANNEL TESTS .....	765
11.3.4.	MOVE AND CLOSING TIME.....	765
11.4.	<i>CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH</i> .....	769
11.4.1.	TEST CHANNEL.....	769
11.4.2.	RADAR WAVEFORM AND TRAFFIC .....	769
11.4.3.	OVERLAPPING CHANNEL TESTS .....	772
11.4.4.	MOVE AND CLOSING TIME.....	772
11.4.5.	10-MINUTE BEACON MONITORING PERIOD.....	776
11.5.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH</i>	777
11.5.1.	TEST CHANNEL.....	777
11.5.2.	RADAR WAVEFORM AND TRAFFIC .....	777
11.5.3.	OVERLAPPING CHANNEL TESTS .....	780
11.5.4.	MOVE AND CLOSING TIME.....	780
11.6.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH</i>	785
11.6.1.	TEST CHANNEL.....	785
11.6.2.	RADAR WAVEFORM AND TRAFFIC .....	785
11.6.3.	OVERLAPPING CHANNEL TESTS .....	788
11.6.4.	MOVE AND CLOSING TIME.....	788
11.7.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH</i>	792
11.7.1.	TEST CHANNEL.....	792
11.7.2.	RADAR WAVEFORM AND TRAFFIC .....	792
11.7.3.	OVERLAPPING CHANNEL TESTS .....	795
11.7.4.	MOVE AND CLOSING TIME.....	795
11.7.5.	10-MINUTE BEACON MONITORING PERIOD.....	799
<b>12.</b>	<b>SETUP PHOTOS</b> .....	<b>800</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** TABLET DEVICE

**MODEL:** A1538

**SERIAL NUMBER:** F4KP600FGJJT (CONDUCTED); F4KP606TGJJV (RADIATED);  
F4KNW077GG44 (DFS)

**DATE TESTED:** FEBRUARY 15 TO MAY 07, 2015


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



MEMGISTU MEKURIA  
SENIOR ENGINEER  
UL VERIFICATION SERVICES INC.

ERIC YU  
LAB ENGINEER  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v01r01/D03 v01r01/D06 v01, FCC KDB 789033 D02, FCC KDB 644545 D03 v01 ANSI C63.10-2009.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input checked="" type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B - 1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

## 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Note: The output power on covered modes is equal to or less than the one referenced.

### 5.2GHz Band

Frequency Range (MHz)	Mode	Antenna	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a SISO	Covered by 802.11n HT20 SISO		
5180 - 5240	802.11a CDD 2TX	Covered by 802.11n HT20 CDD 2TX		
5180 - 5240	802.11n HT20 SISO	Antenna B	16.50	44.67
5180 - 5240	802.11n HT20 SISO	Antenna A	17.09	51.17
5180 - 5240	802.11n HT20 CDD 2TX	Antenna B + A	18.99	79.25
5180 - 5240	802.11n HT20 STBC 2TX	Antenna B + A	19.84	96.38
5180 - 5240	802.11n HT20 SDM 2TX	Coverd by 802.11n HT20 STBC 2TX		
5190 - 5230	802.11n HT40 SISO	Antenna B	16.52	44.87
5190 - 5230	802.11n HT40 SISO	Antenna A	17.05	50.70
5190 - 5230	802.11n HT40 CDD 2TX	Antenna B + A	18.98	79.07
5190 - 5230	802.11n HT40 STBC 2TX	Antenna B + A	19.73	93.97
5190 - 5230	802.11n HT40 SDM 2TX	Coverd by 802.11n HT40 STBC 2TX		
5210	802.11ac VHT80 SISO	Antenna B	13.17	20.75
5210	802.11ac VHT80 SISO	Antenna A	13.17	20.75
5210	802.11ac VHT80 CDD 2TX	Antenna B + A	15.19	33.04
5210	802.11ac VHT80 STBC 2TX	Covered by 802.11ac VHT80 CDD 2TX		
5210	802.11ac VHT80 SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX		

### 5.3GHz Band

Frequency Range (MHz)	Mode	Antenna	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a SISO	Covered by 802.11n HT20 SISO		
5260 - 5320	802.11a CDD 2TX	Covered by 802.11n HT20 CDD 2TX		
5260 - 5320	802.11n HT20 SISO	Antenna B	15.53	35.73
5260 - 5320	802.11n HT20 SISO	Antenna A	16.09	40.64
5260 - 5320	802.11n HT20 CDD 2TX	Antenna B + A	18.60	72.44
5260 - 5320	802.11n HT20 STBC 2TX	Antenna B + A	18.87	77.09
5260 - 5320	802.11n HT20 SDM 2TX	Covered by 802.11n HT20 STBC 2TX		
5270 - 5310	802.11n HT40 SISO	Antenna B	15.58	36.14
5270 - 5310	802.11n HT40 SISO	Antenna A	16.04	40.18
5270 - 5310	802.11n HT40 CDD 2TX	Antenna B + A	18.41	69.34
5270 - 5310	802.11n HT40 STBC 2TX	Antenna B + A	18.79	75.68
5270 - 5310	802.11n HT40 SDM 2TX	Covered by 802.11n HT40 STBC 2TX		
5290	802.11ac VHT80 SISO	Antenna B	14.17	26.12
5290	802.11ac VHT80 SISO	Antenna A	14.11	25.76
5290	802.11ac VHT80 CDD 2TX	Antenna B + A	16.22	41.88
5290	802.11ac VHT80 STBC 2TX	Covered by 802.11n HT80 CDD 2TX		
5290	802.11ac VHT80 SDM 2TX	Covered by 802.11n HT80 CDD 2TX		

**5.6GHz Band**

Frequency Range (MHz)	Mode	Antenna	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a SISO	Covered by 802.11n HT20 SISO		
5720	802.11a SISO	Covered by 802.11n HT20 SISO		
5500 - 5700	802.11a CDD 2TX	Covered by 802.11n HT20 CDD 2TX		
5720	802.11a CDD 2TX	Covered by 802.11n HT20 CDD 2TX		
5500 - 5700	802.11n HT20 SISO	Antenna B	15.03	31.84
5720	802.11n HT20 SISO	Antenna B	13.69	23.39
5500 - 5700	802.11n HT20 SISO	Antenna A	14.99	31.55
5720	802.11n HT20 SISO	Antenna A	13.81	24.04
5500 - 5700	802.11n HT20 CDD 2TX	Antenna B + A	18.07	64.12
5720	802.11n HT20 CDD 2TX	Antenna B + A	16.80	47.86
5500 - 5700	802.11n HT20 STBC 2TX	Covered by 802.11n HT20 CDD 2TX		
5500 - 5700	802.11n HT20 SDM 2TX	Covered by 802.11n HT20 CDD 2TX		
5720	802.11n HT20 STBC 2TX	Covered by 802.11n HT20 CDD 2TX		
5720	802.11n HT20 SDM 2TX	Covered by 802.11n HT20 CDD 2TX		
5510 - 5670	802.11n HT40 SISO	Antenna B	15.04	31.92
5710	802.11n HT40 SISO	Antenna B	14.08	25.59
5510 - 5670	802.11n HT40 SISO	Antenna A	15.00	31.62
5710	802.11n HT40 SISO	Antenna A	14.12	25.82
5510 - 5670	802.11n HT40 CDD 2TX	Antenna B + A	18.07	64.12
5710	802.11n HT40 CDD 2TX	Antenna B + A	16.67	46.45
5510 - 5670	802.11n HT40 STBC 2TX	Covered by 802.11n HT40 CDD 2TX		
5510 - 5670	802.11n HT40 SDM 2TX	Covered by 802.11n HT40 CDD 2TX		
5710	802.11n HT40 STBC 2TX	Covered by 802.11n HT40 CDD 2TX		
5710	802.11n HT40 SDM 2TX	Covered by 802.11n HT40 CDD 2TX		
5530-5610	802.11ac VHT80 SISO	Antenna B	15.12	32.51
5690	802.11ac VHT80 SISO	Antenna B	14.82	30.34
5530-5610	802.11ac VHT80 SISO	Antenna A	15.19	33.04
5690	802.11ac VHT80 SISO	Antenna A	15.09	32.28
5530-5610	802.11ac VHT80 CDD 2TX	Antenna B + A	18.18	65.77
5690	802.11ac VHT80 CDD 2TX	Antenna B + A	18.02	63.39
5530-5610	802.11ac VHT80 STBC 2TX	Covered by 802.11n HT80 CDD 2TX		
5530-5610	802.11ac VHT80 SDM 2TX	Covered by 802.11n HT80 CDD 2TX		
5690	802.11ac VHT80 STBC 2TX	Covered by 802.11n HT80 CDD 2TX		
5690	802.11ac VHT80 SDM 2TX	Covered by 802.11n HT80 CDD 2TX		



**5.8GHz Band**

Frequency Range (MHz)	Mode	Antenna	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a SISO	Covered by 802.11n HT20 SISO		
5745 - 5825	802.11a CDD 2TX	Covered by 802.11n HT20 CDD 2TX		
5745 - 5825	802.11n HT20 SISO	Antenna B	16.50	44.67
5745 - 5825	802.11n HT20 SISO	Antenna A	17.52	56.49
5745 - 5825	802.11n HT20 CDD 2TX	Antenna B + A	19.99	99.77
5745 - 5825	802.11n HT20 STBC 2TX	Covered by 802.11n HT20 CDD 2TX		
5745 - 5825	802.11n HT20 SDM 2TX	Covered by 802.11n HT20 CDD 2TX		
5755 - 5795	802.11n HT40 SISO	Antenna B	15.94	39.26
5755 - 5795	802.11n HT40 SISO	Antenna A	15.93	39.17
5755 - 5795	802.11n HT40 CDD 2TX	Antenna B + A	17.93	62.09
5755 - 5795	802.11n HT40 STBC 2TX	Covered by 802.11n HT40 CDD 2TX		
5755 - 5795	802.11n HT40 SDM 2TX	Covered by 802.11n HT40 CDD 2TX		
5775	802.11ac VHT80 SISO	Antenna B	13.59	22.86
5775	802.11ac VHT80 SISO	Antenna A	13.60	22.91
5775	802.11ac VHT80 CDD 2TX	Antenna B + A	16.32	42.85
5775	802.11ac VHT80 STBC 2TX	Covered by 802.11ac VHT80 CDD 2TX		
5775	802.11ac VHT80 SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX		

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain	
	Antenna B	Antenna A
5.2	4.1	2.1
5.3	4.2	3.1
5.5	4.8	3.2
5.8	4.9	3.4

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 12H33.

## 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The following configurations were investigated and EUT powered by AC/DC adapter was the worst-case scenario. AC power line and below 1G radiated tests were conducted on configuration 1.

Configuration	Descriptions
1	EUT powered by AC/DC adapter via USB cable
2	EUT powered by host PC via USB cable

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either antenna A or antenna B. For MIMO modes, both antenna A and antenna B used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z. After the investigation it was determined that the below orientations was considered as the worst-case for each mode. Then all final radiated testing was performed with the EUT at the worst-case orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2 - 5.8	1TX SISO	Antenna A	Y-Landscape
		Antenna B	Y-Landscape
	2TX MIMO	Antenna A + Antenna B	Y-Landscape

Worst-case data rates as provided by the client were:

- 802.11a mode: 6 Mbps
- 802.11n HT20 mode: MCS0
- 802.11n HT40 mode: MCS0
- 802.11ac VHT20 mode: MCS0
- 802.11ac VHT40 mode: MCS0
- 802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

Radiated emissions for EUT with antenna was performed and passed; therefore, antenna port spurious was not performed.

For the co-located test, no other emissions were found after have been investigated from the conducted measurement with all different combination frequencies between BT & 5GHz bands.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Lenovo	92P1160	11S92P1160Z1ZBGH798B12	NA
Laptop	Lenovo	7659	L3-AL664 08/03	NA
Earphone	Apple	NA	NA	NA
EUT AC/DC adapter	Apple	MD836LL/A	NA	NA

### I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A

### I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None used						


### I/O CABLES (AC POWER CONDUCTED TEST and below 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US115	Un-Shielded	0.8	NA
2	DC	1	lightning	Un-Shielded	1	NA
3	Audio	1	Jack	Un-Shielded	0.5	NA

**TEST SETUP- CONDUCTED PORT**

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


**SETUP DIAGRAM**

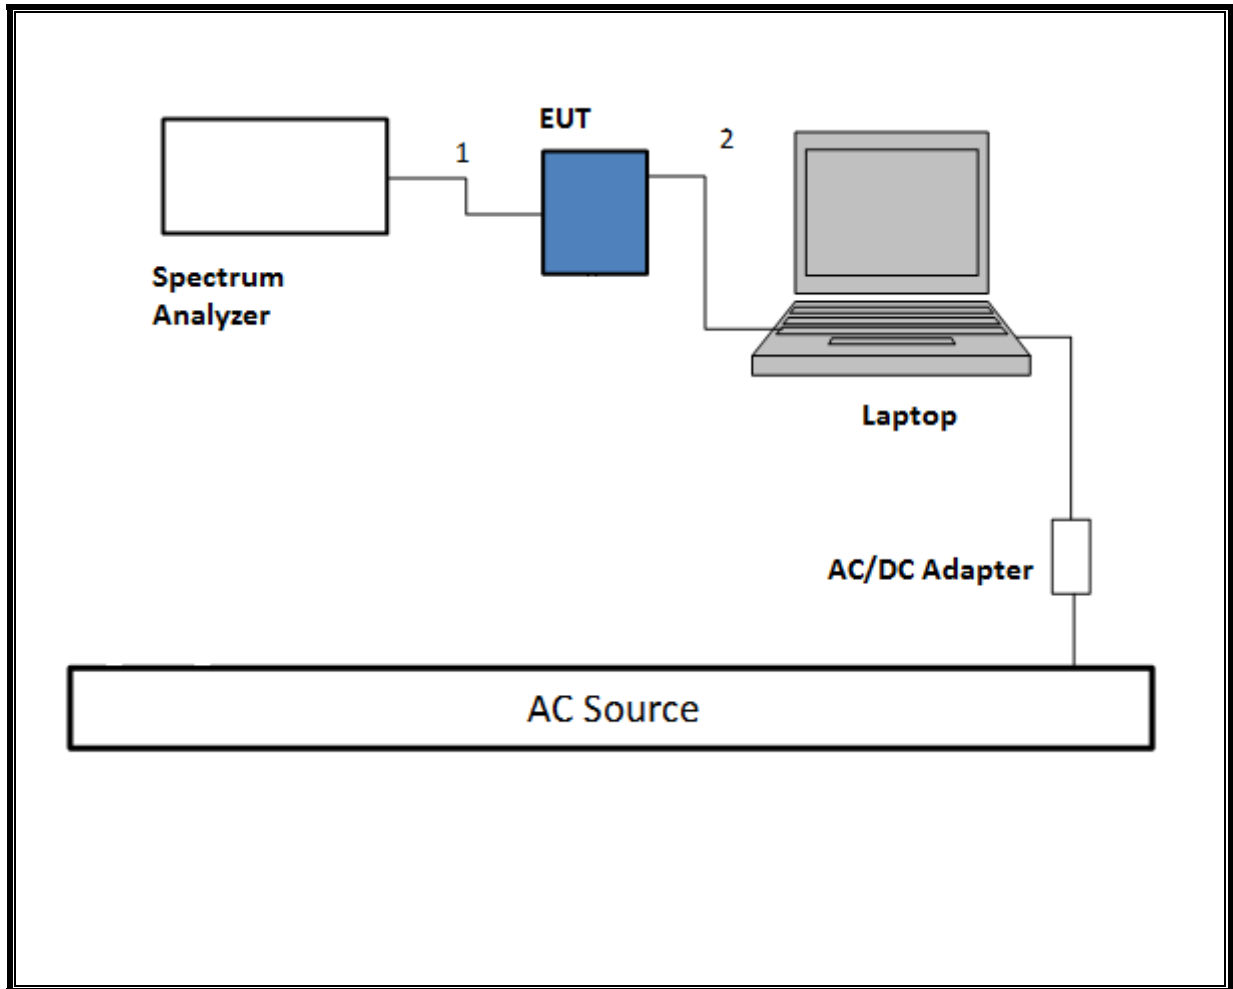

**TEST SETUP- RADIATED-ABOVE 1 GHZ**

The EUT was tested battery powered. Test software exercised the EUT.


**SETUP DIAGRAM**

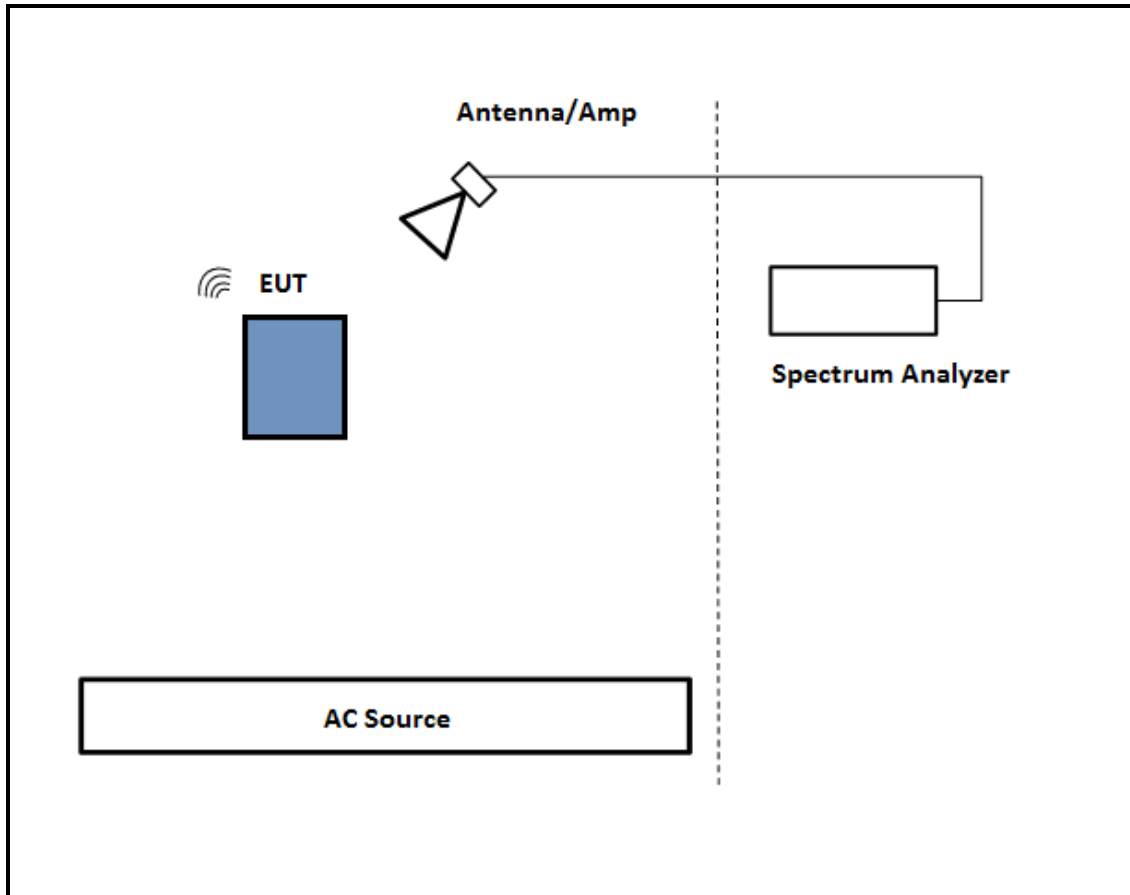

**TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS**

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.

**SETUP DIAGRAM**

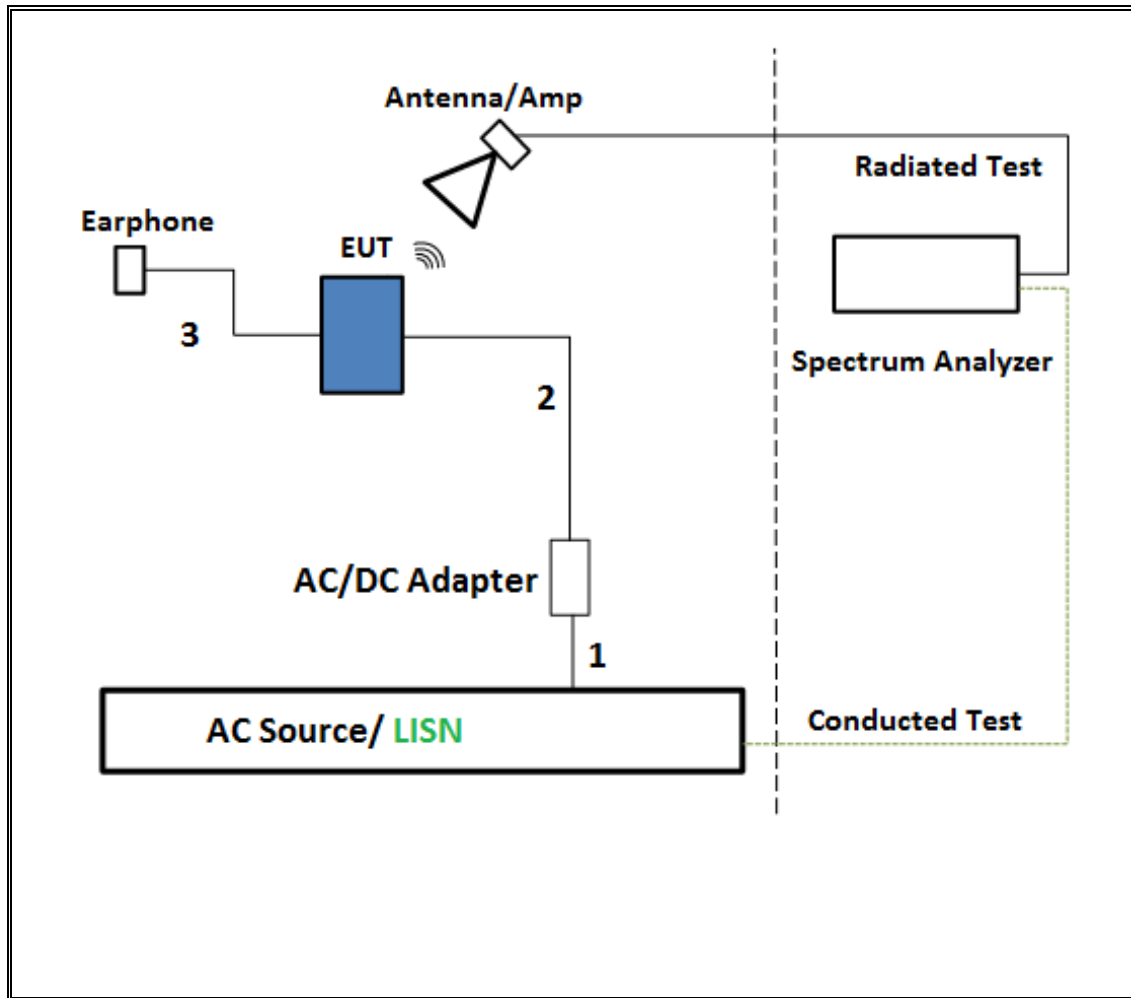

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Cal Date	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	2/10/2015	2/10/2016
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	3/5/2015	3/3/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1/26/2015	1/26/2016
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	4/23/2014	4/23/2015
Spectrum Analyzer, PXA, 3Hz to 50GHz	Agilent	N9030A	9/13/2014	9/13/2015
*Power Meter, P-series single channel	Agilent	N1911A	4/3/2014	4/3/2015
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	7/12/2014	7/12/2015
Amplifier, 26 - 40GHz	Miteq	NSP4000-SP2	9/3/2014	9/3/2015
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	12/17/2014	12/17/2015
Spectrum Analyzer, 40 GHz	Agilent	8564E	8/6/2014	8/6/2015
*Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	3/25/2014	3/25/2015
Horn Antenna, 40GHz	ARA	MWH-2640/B	7/15/2014	7/15/2015
Amplifier, 26 to 40GHz	Miteq	NSP4000-SP2	9/3/2014	9/3/2015
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ECSI7	09/16/14	09/16/15
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	01/16/15	01/16/16
Power Cable, Line Conducted Emissions ANSI 63.4	UL	PG1	7/28/2014	7/28/2015
UL SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

\*equipment was used before expiration date.



## 7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS



None; for reporting purposes only.

#### PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.916	1.940	0.988	98.76%	0.00	0.010
802.11n HT20 CDD	1.920	1.938	0.991	99.07%	0.00	0.010
802.11n HT20 STBC	1.924	1.948	0.988	98.77%	0.00	0.010
802.11n HT40 1TX	1.124	1.142	0.984	98.42%	0.00	0.010
802.11n HT40 CDD	1.124	1.142	0.984	98.42%	0.00	0.010
802.11n HT40 STBC	1.128	1.146	0.984	98.43%	0.00	0.010
802.11ac VHT80 1TX	0.544	0.565	0.963	96.28%	0.16	1.838
802.11ac VHT80 CDD	0.460	0.483	0.952	95.24%	0.21	2.174
802.11ac VHT80 STBC	0.468	0.490	0.955	95.51%	0.20	2.137



## 7.2. DUTY CYCLE PLOTS

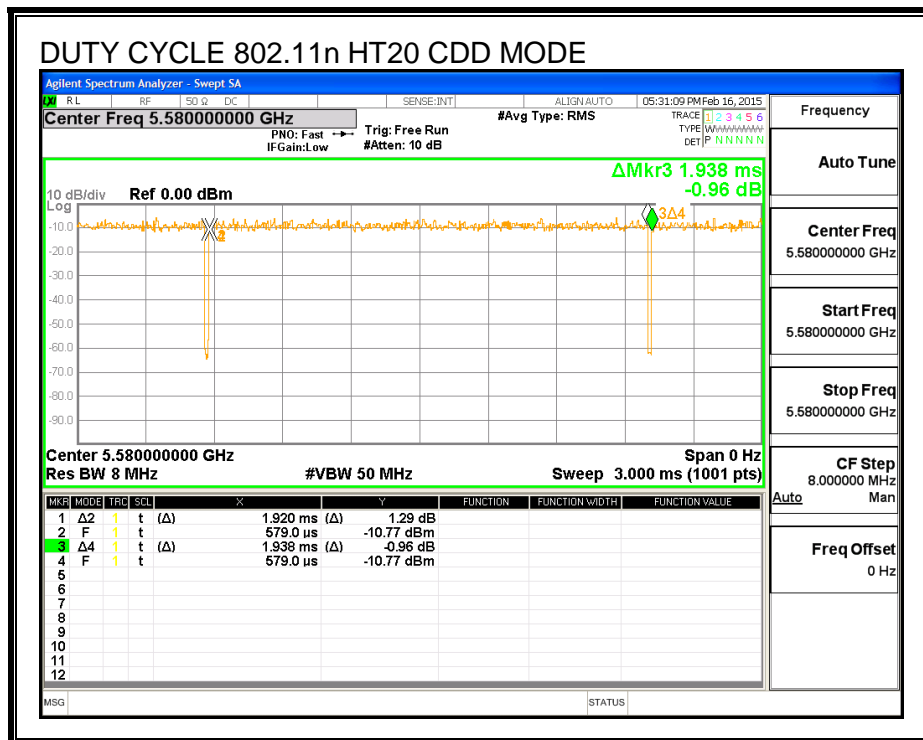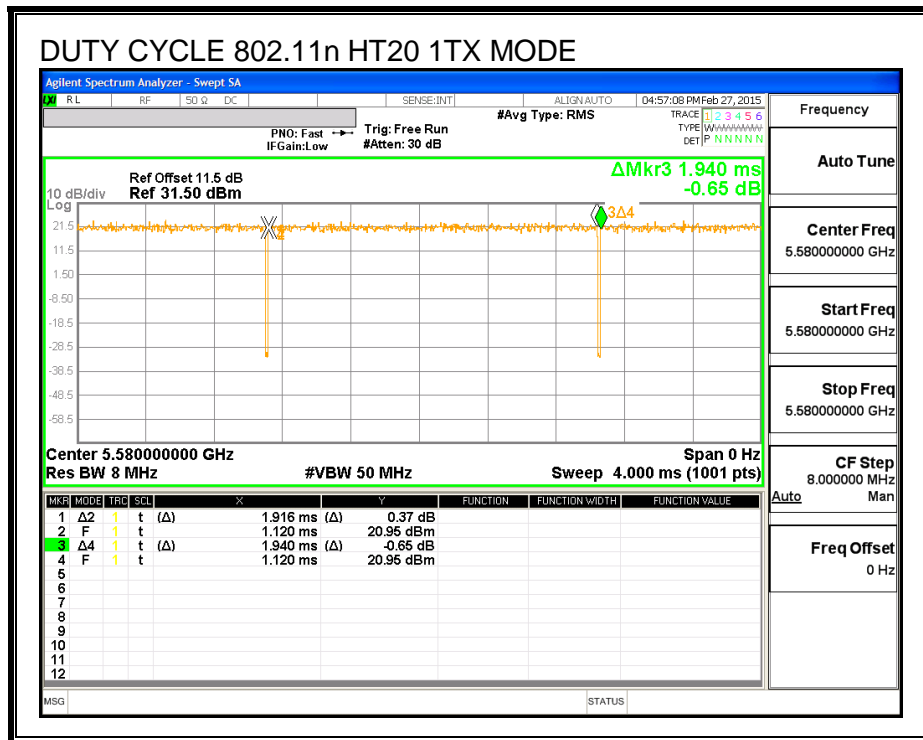



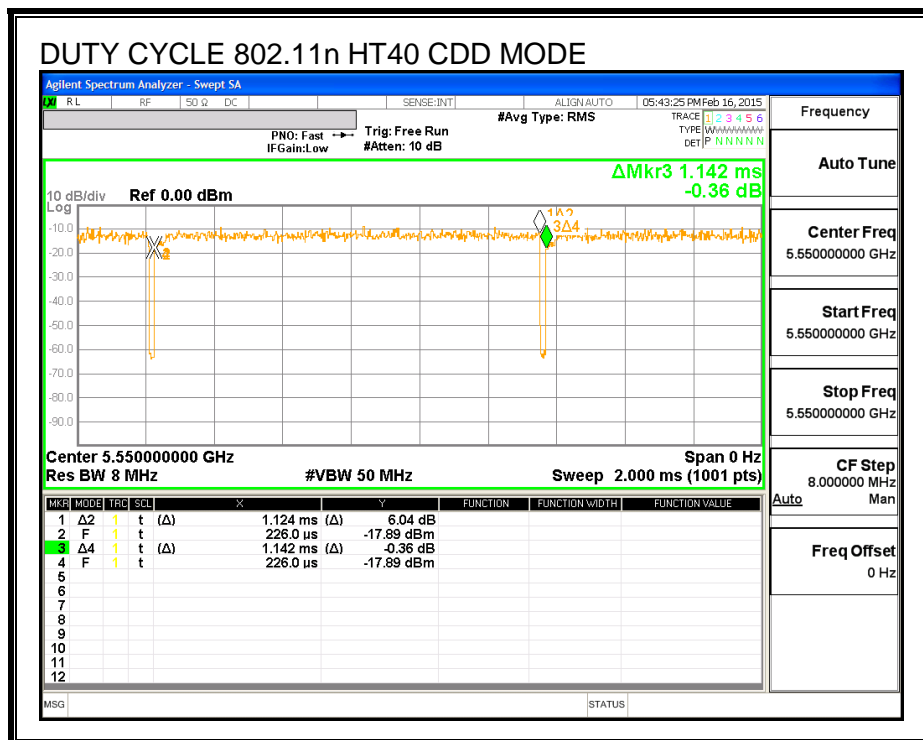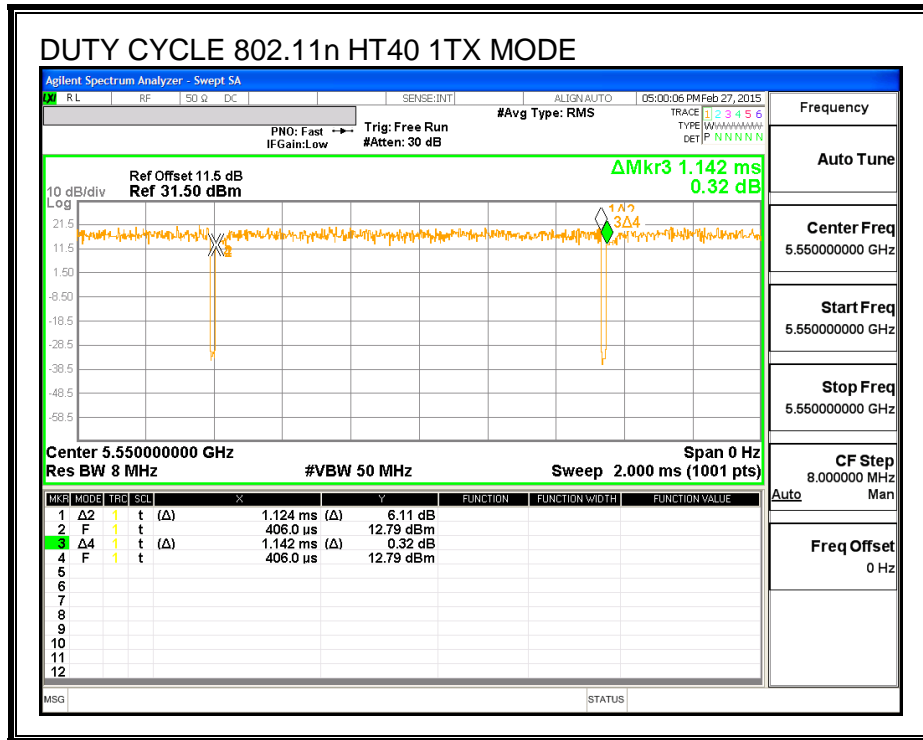



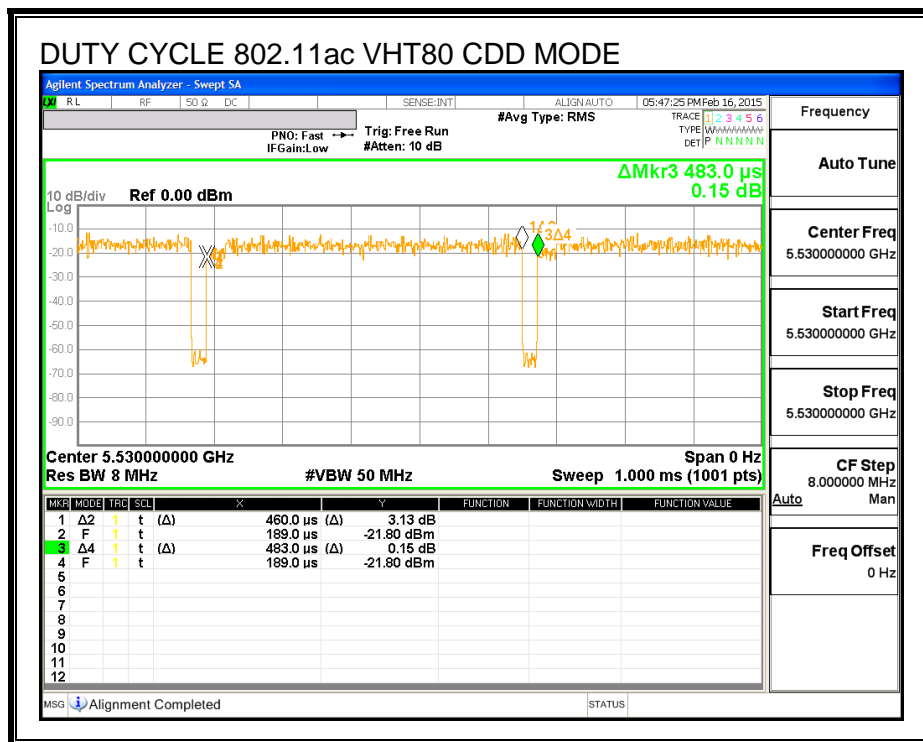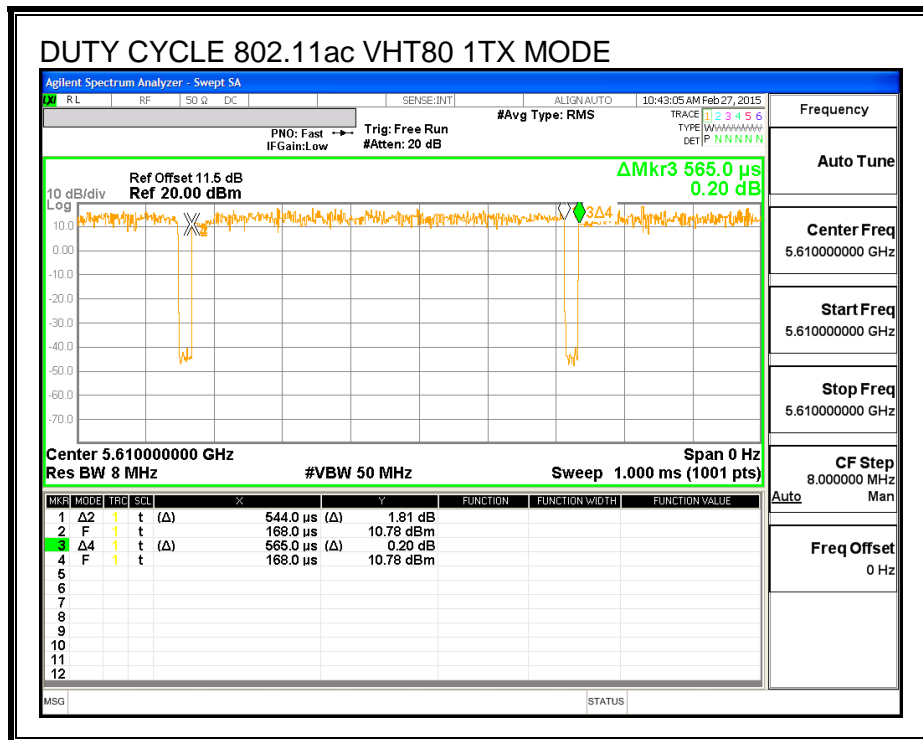



### **7.3. MEASUREMENT METHODS**

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Conducted Output Power: KDB 789033 D02 v01, Section E.3.a (Method PM).

Power Spectral Density: KDB 789033 D02 v01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, and G.5.



---

## 8. ANTENNA PORT TEST RESULTS

### 8.1. 802.11n HT20 SISO MODE IN THE 5.2 GHz BAND ANTENNA B

#### 8.1.1. 26 dB BANDWIDTH



##### LIMITS


None; for reporting purposes only.

##### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.02
Mid	5200	22.02
High	5240	21.93

**26 dB BANDWIDTH**

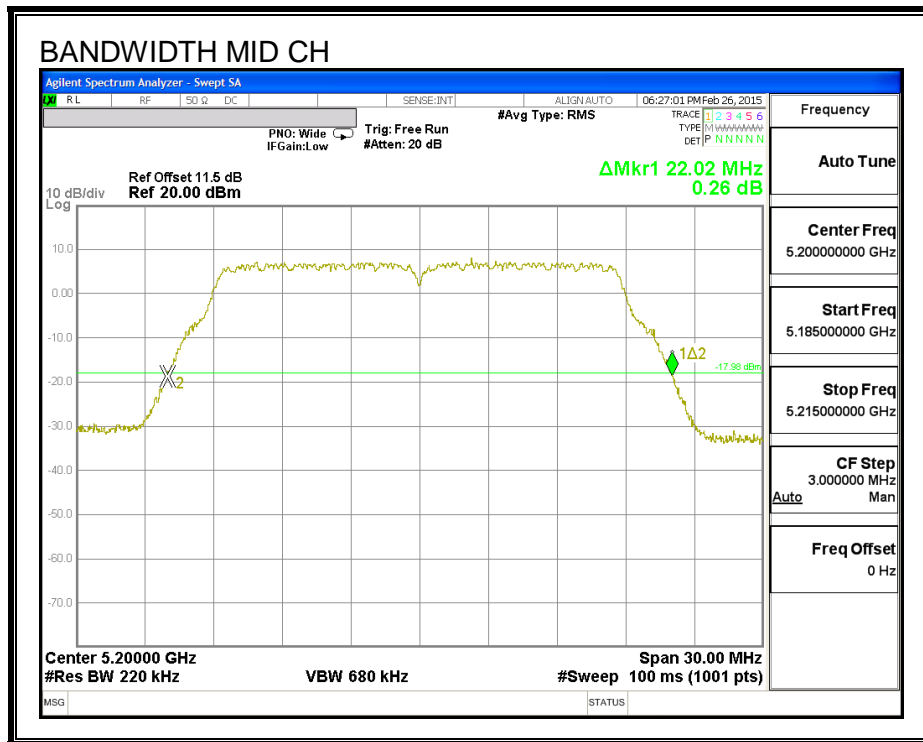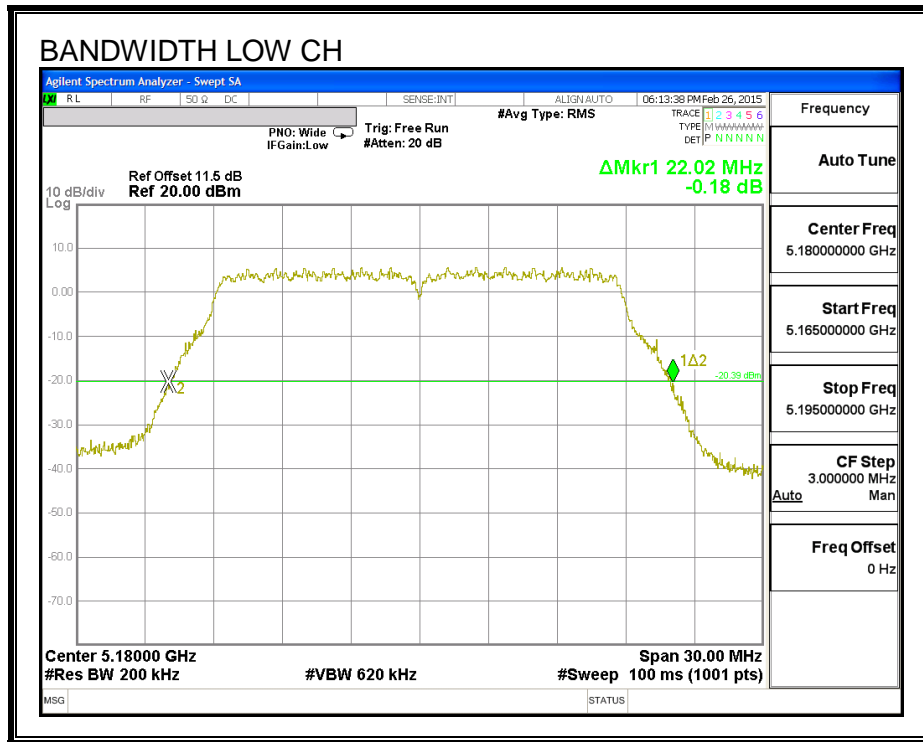

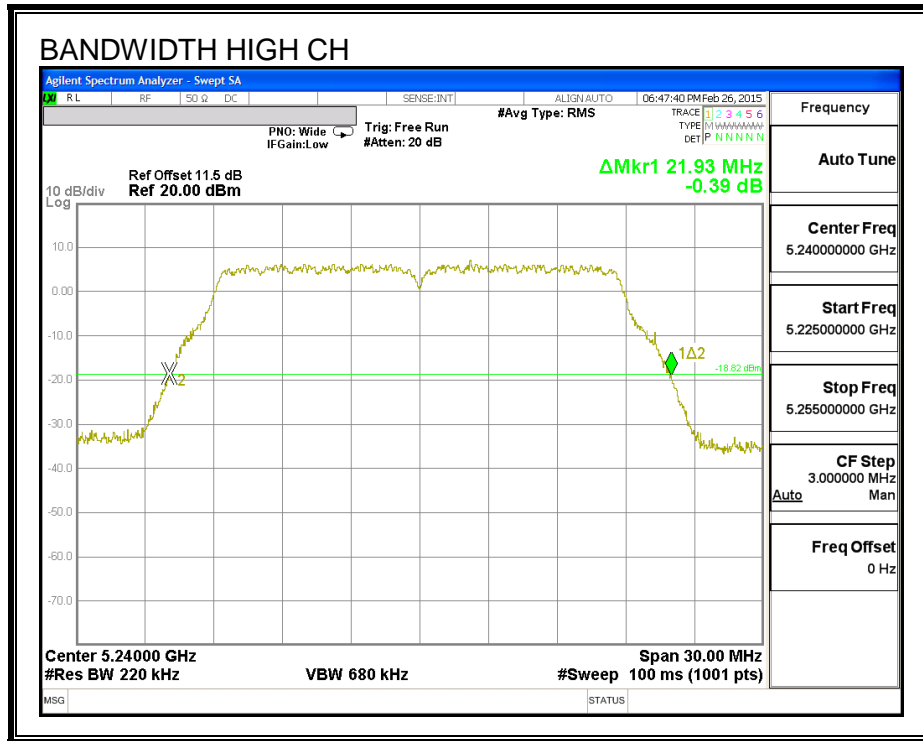

---

### 8.1.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.666
Mid	5200	17.746
High	5240	17.710

**99% BANDWIDTH**

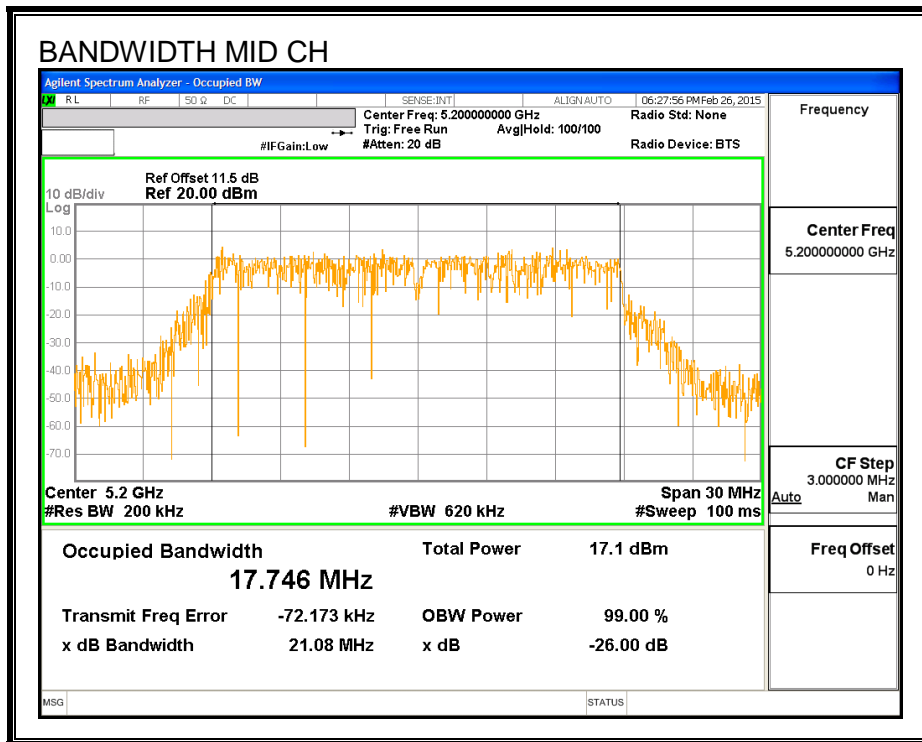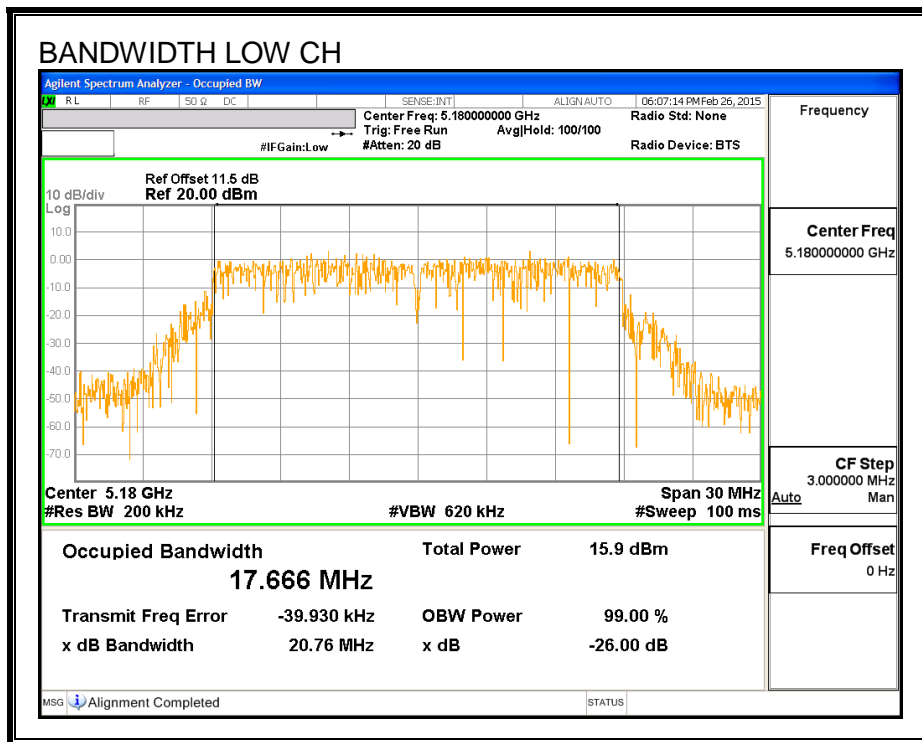

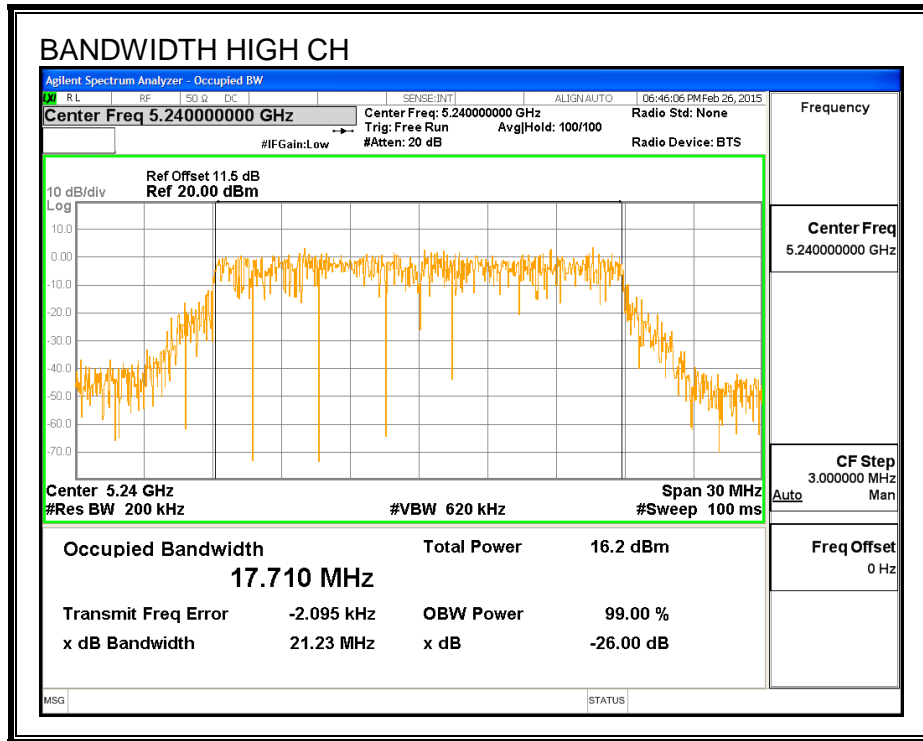

### 8.1.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.92
Mid	5200	16.49
High	5240	16.50

---

## 8.1.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

### RESULTS



**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	4.10	4.10	24.00	11.00
Mid	5200	4.10	4.10	24.00	11.00
High	5240	4.10	4.10	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.92	15.92	24.00	-8.08
Mid	5200	16.49	16.49	24.00	-7.51
High	5240	16.50	16.50	24.00	-7.50

**PSD Results**

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.702	4.702	11.00	-6.30
Mid	5200	5.351	5.351	11.00	-5.65
High	5240	5.262	5.262	11.00	-5.74

**PSD, ANTENNA B**

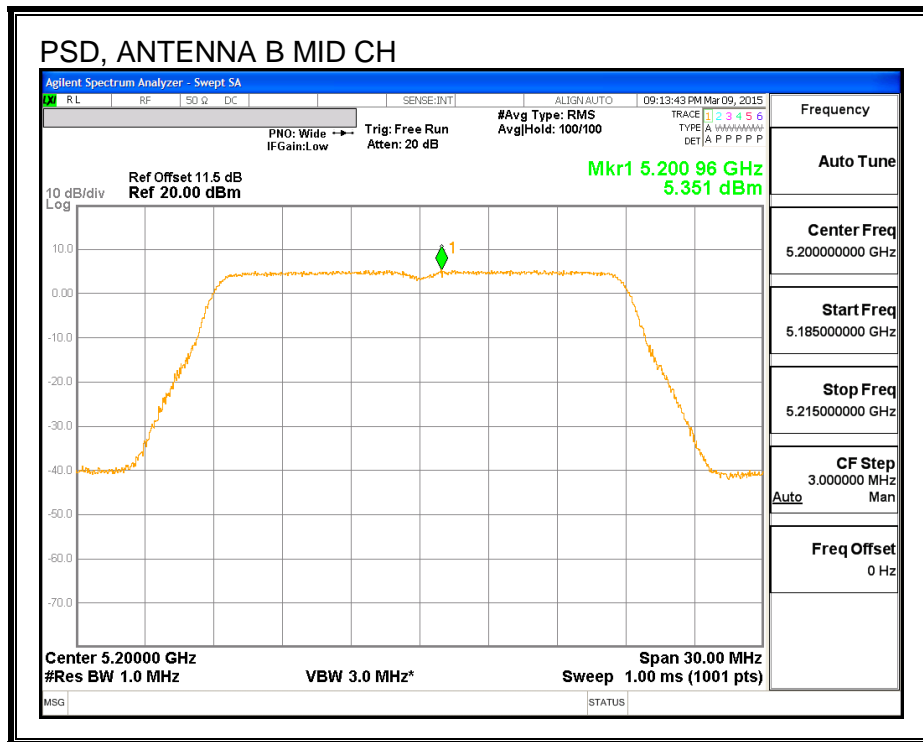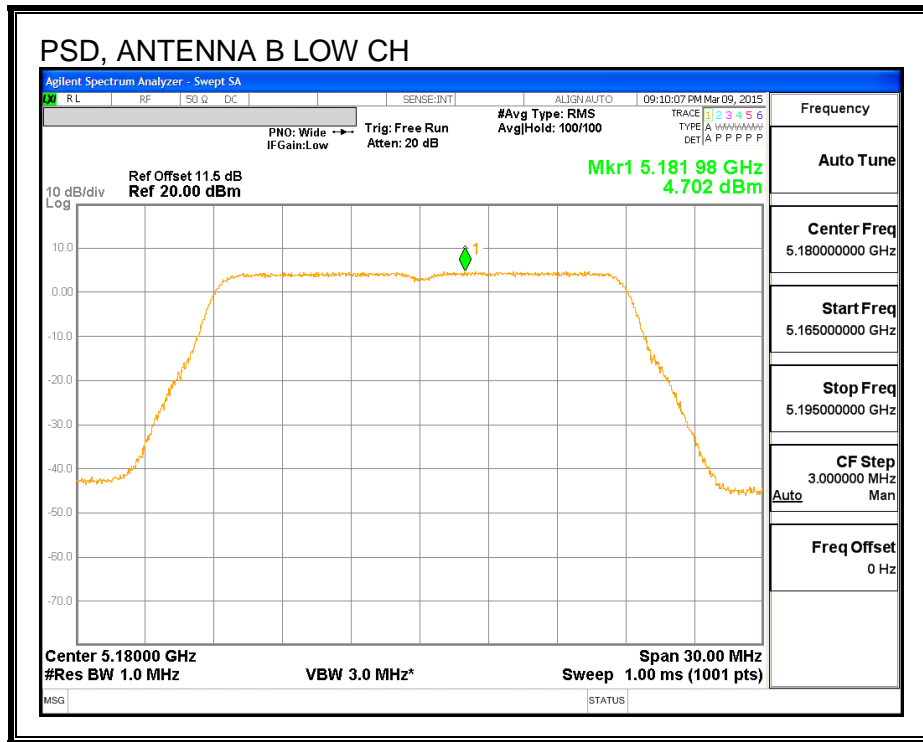



---

## 8.2. 802.11n HT20 SISO MODE IN THE 5.2 GHz BAND ANTENNA A

### 8.2.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.05
Mid	5200	21.93
High	5240	21.90

**26 dB BANDWIDTH**

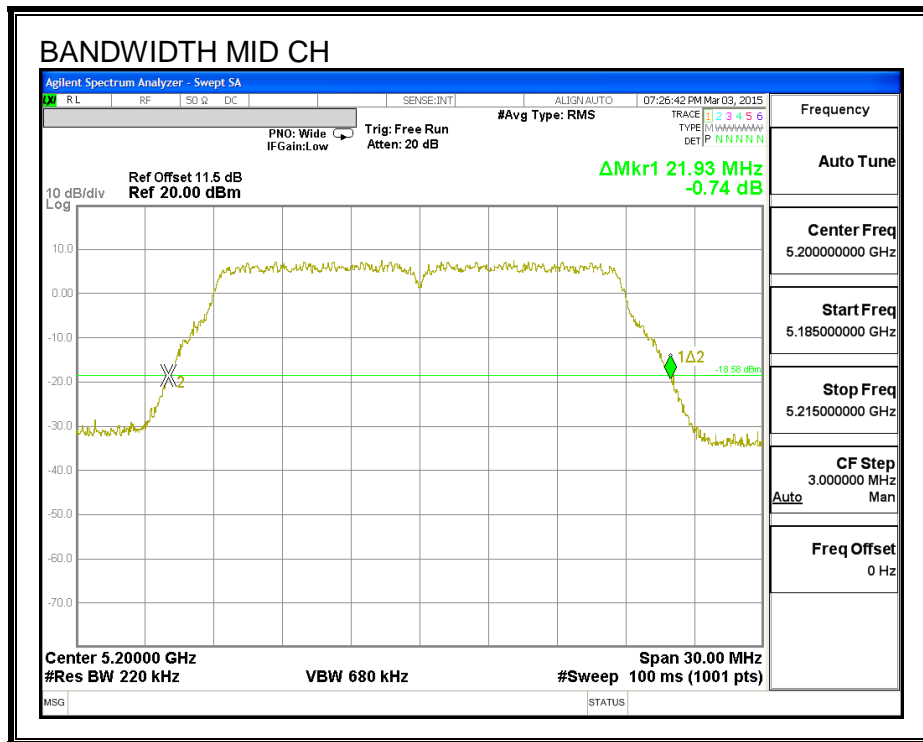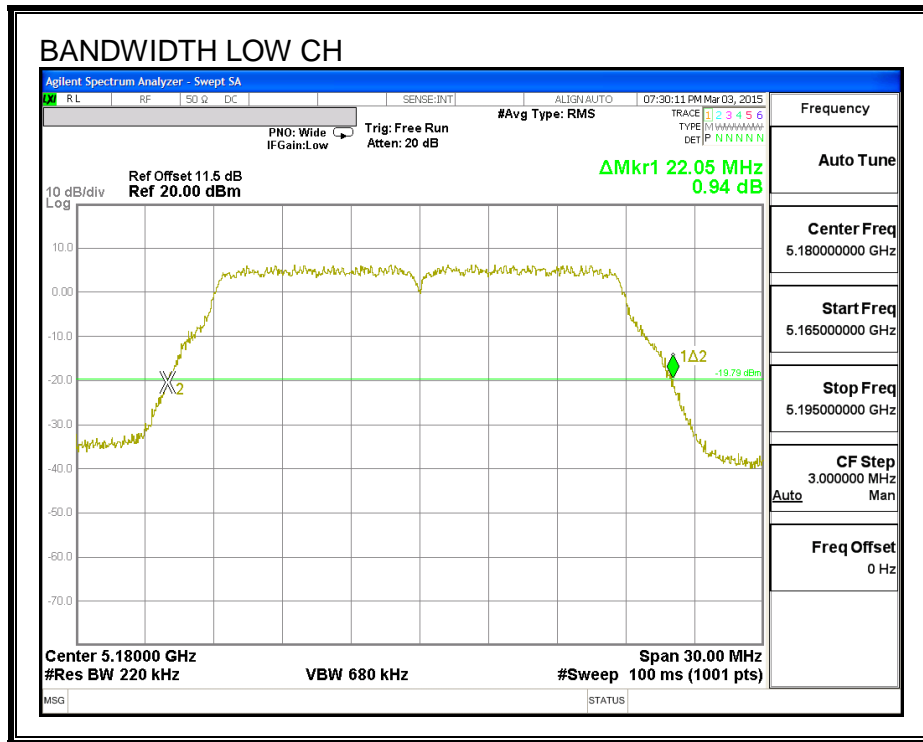

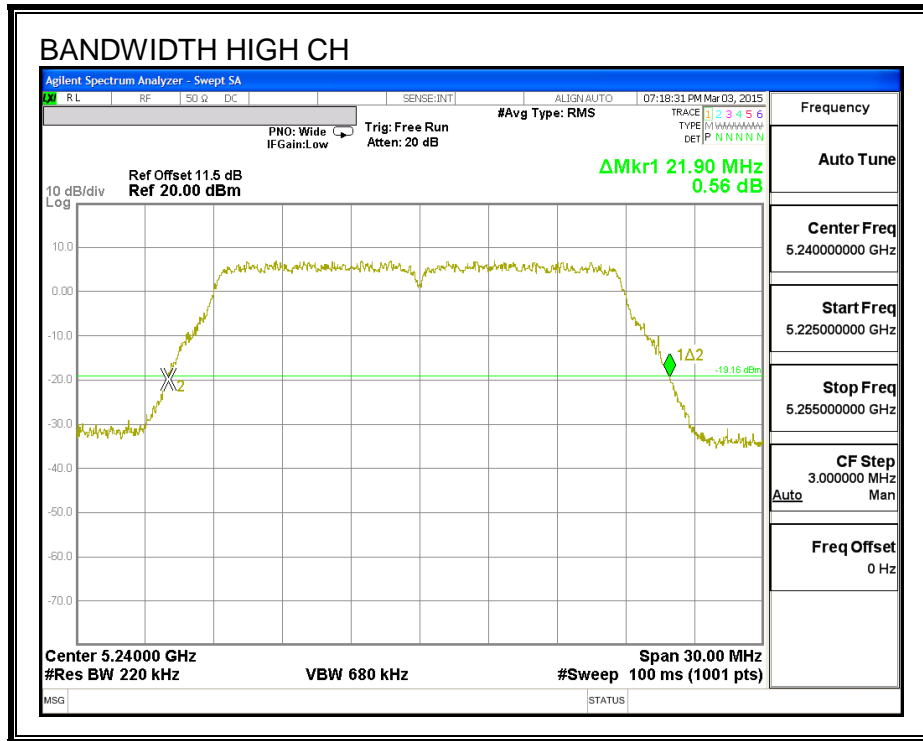

---

### 8.2.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.729
Mid	5200	17.736
High	5240	17.667

**99% BANDWIDTH**

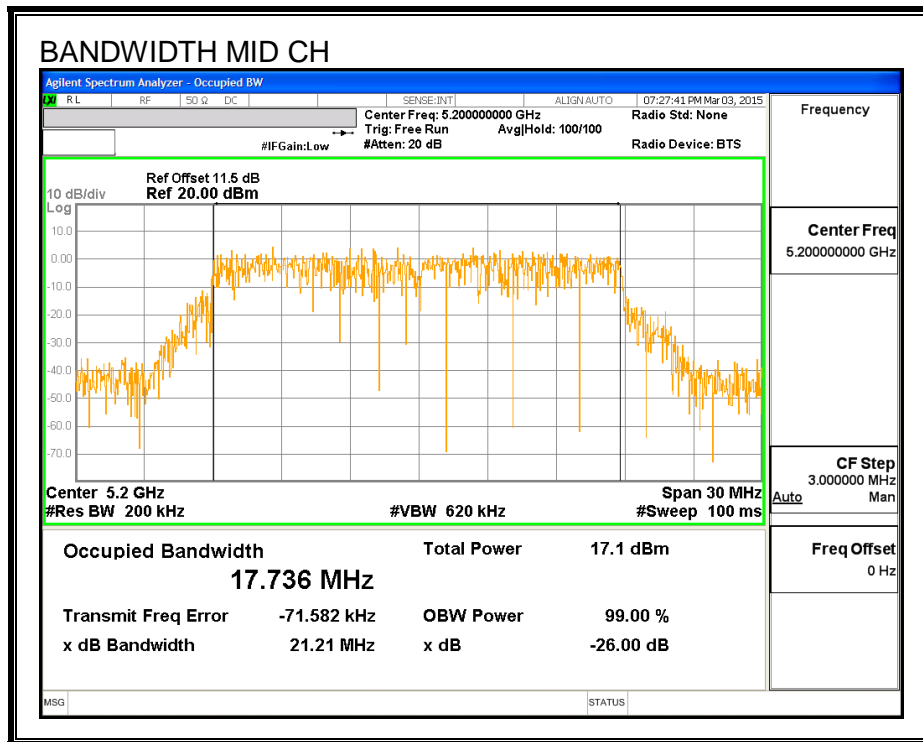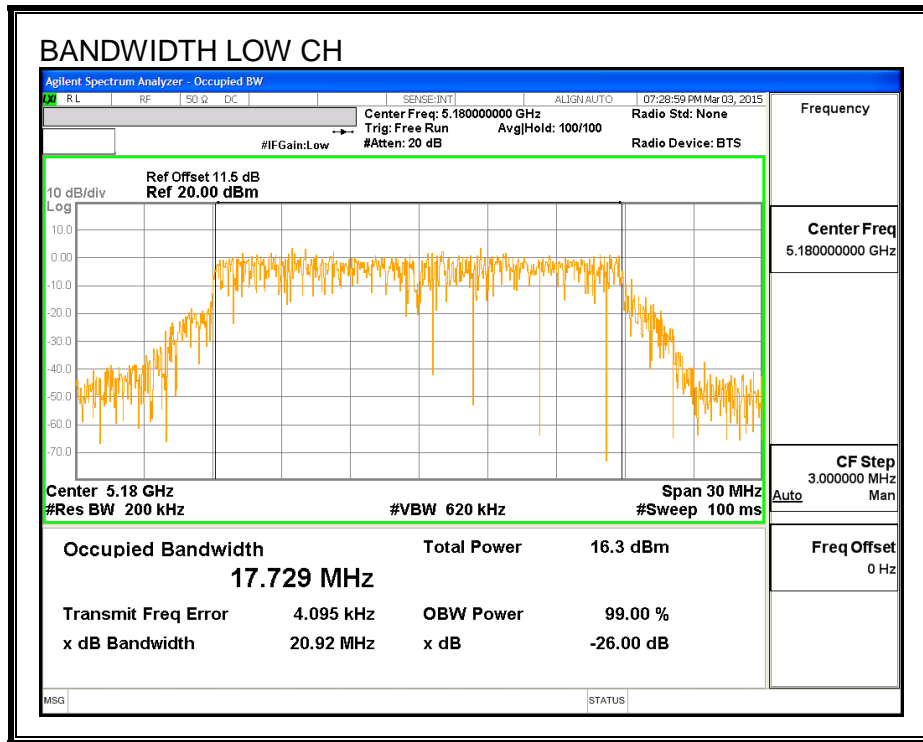



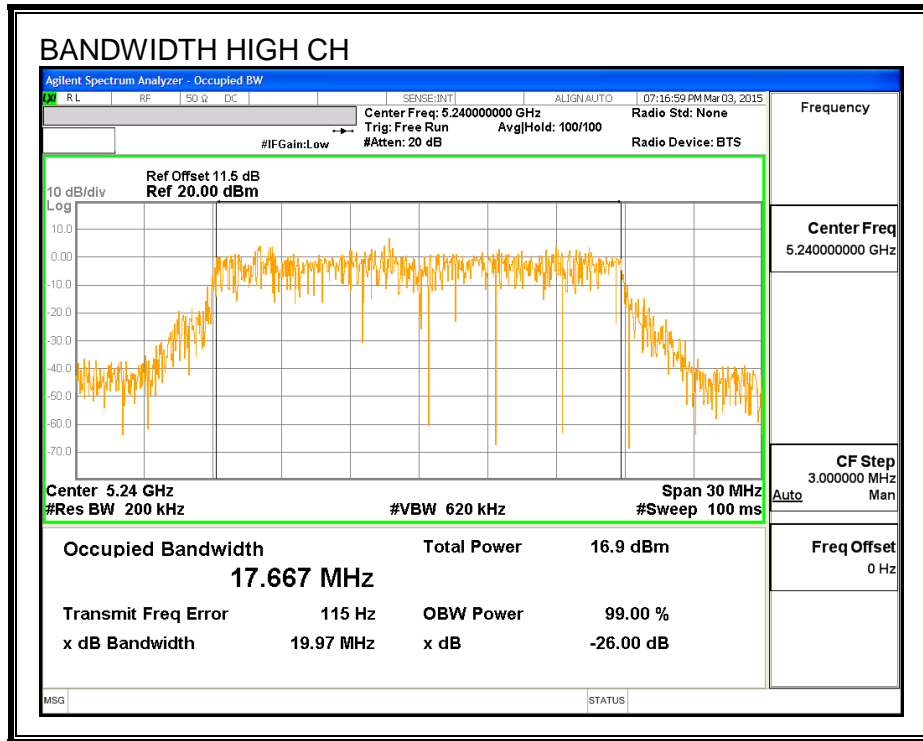

### 8.2.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.96
Mid	5200	16.99
High	5240	17.09

---

## 8.2.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

### RESULTS

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.10	2.10	24.00	11.00
Mid	5200	2.10	2.10	24.00	11.00
High	5240	2.10	2.10	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.96	15.96	24.00	-8.04
Mid	5200	16.99	16.99	24.00	-7.01
High	5240	17.09	17.09	24.00	-6.91

**PSD Results**

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.80	4.80	11.00	-6.21
Mid	5200	5.83	5.83	11.00	-5.17
High	5240	5.82	5.82	11.00	-5.18

**PSD, ANTENNA A**

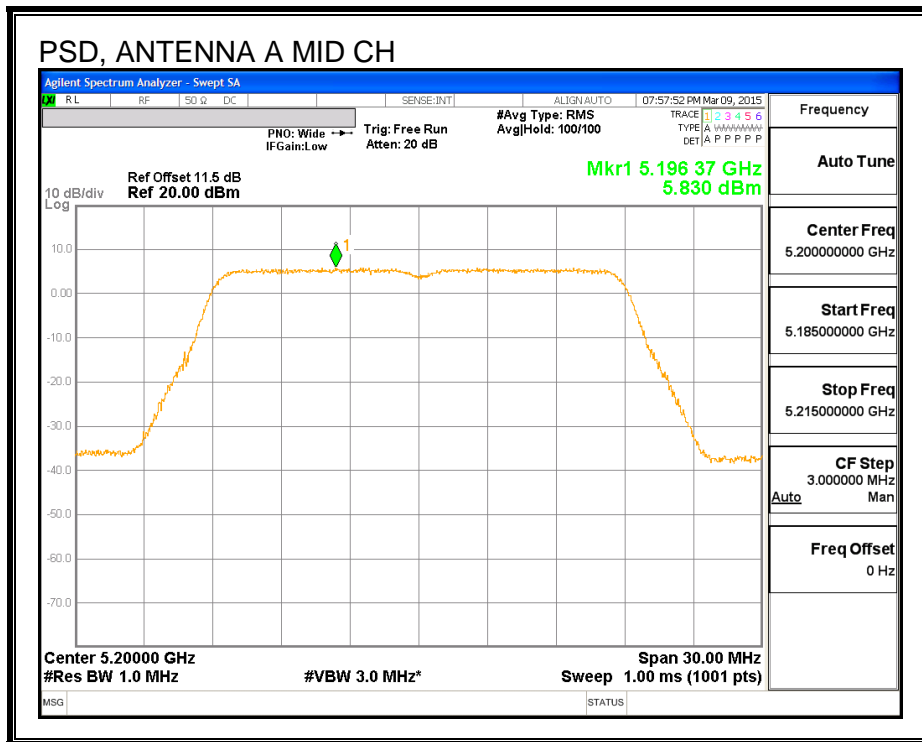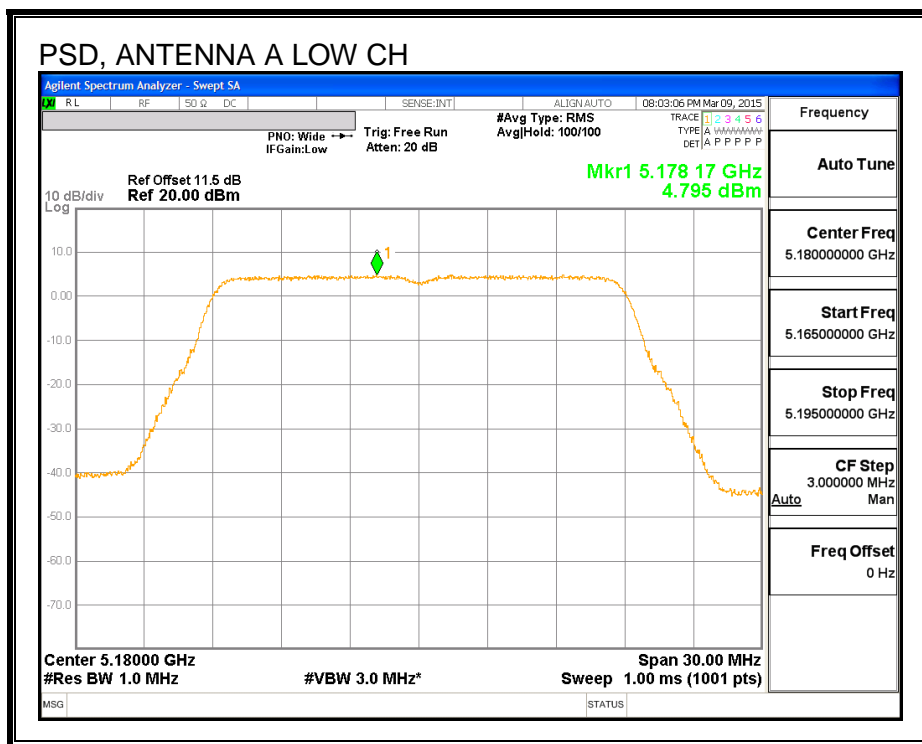



---

### 8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND

#### 8.3.1. 26 dB BANDWIDTH



##### LIMITS

None; for reporting purposes only.


##### RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5180	21.87	21.78
Mid	5200	21.87	21.69
High	5240	21.87	21.81


**26 dB BANDWIDTH, ANTENNA B**

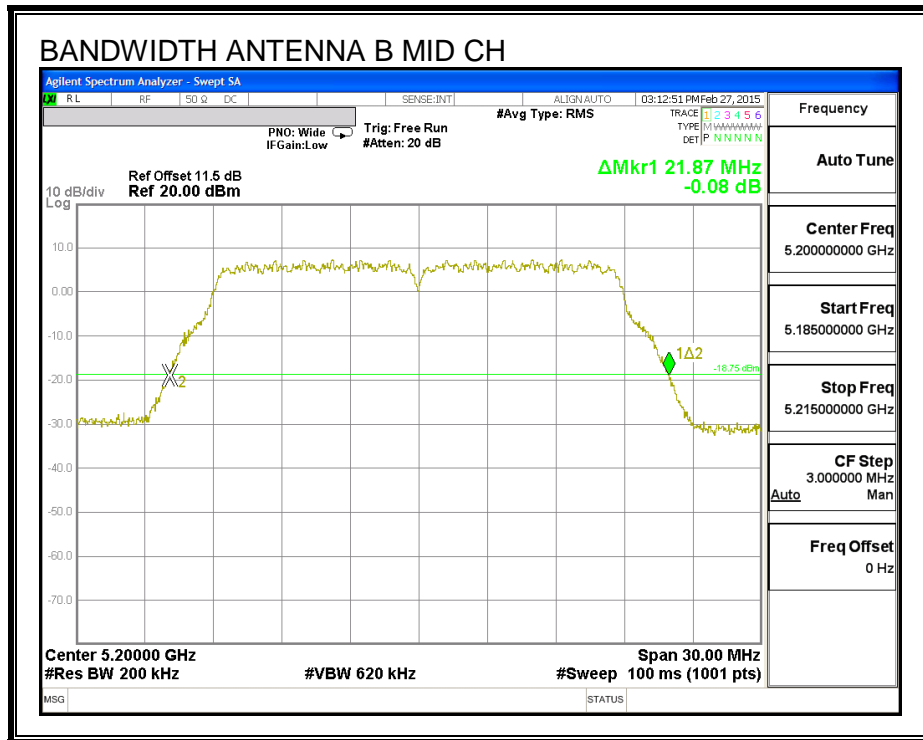
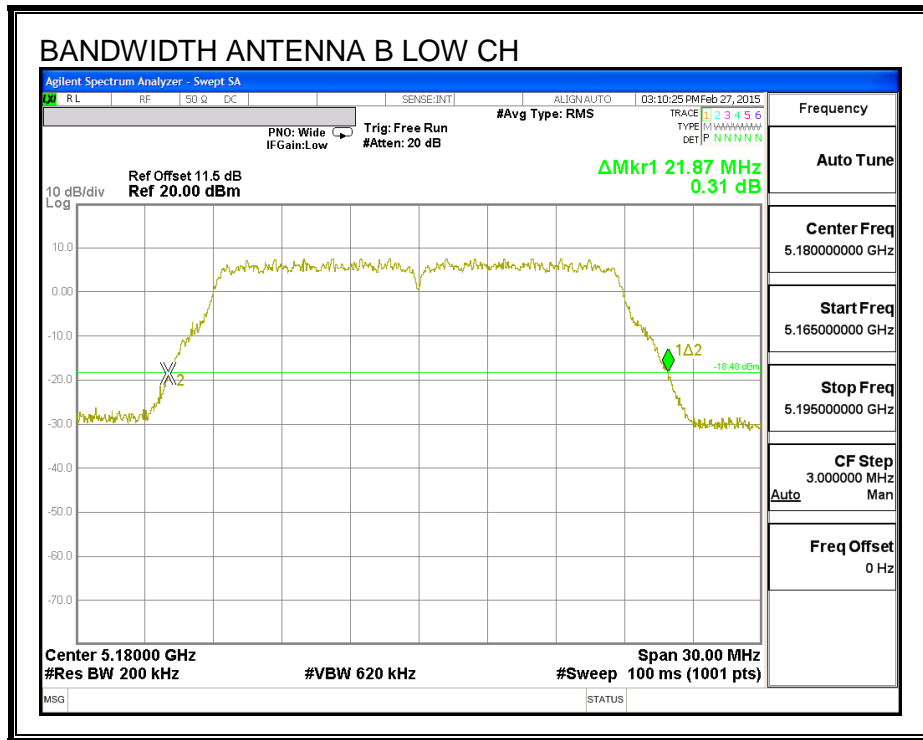




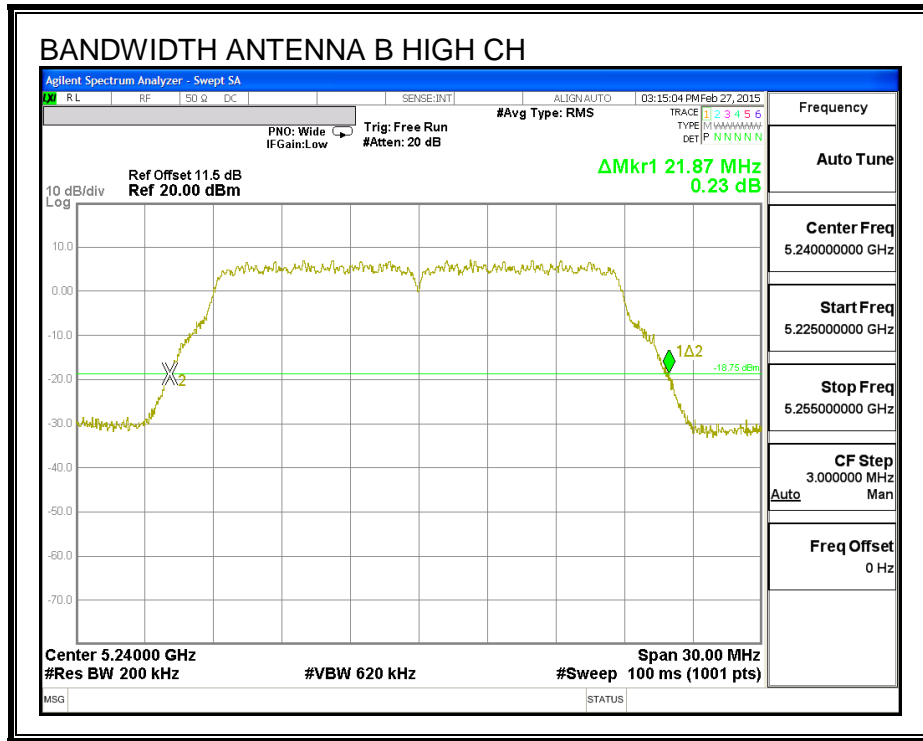

**26 dB BANDWIDTH, ANTENNA A**

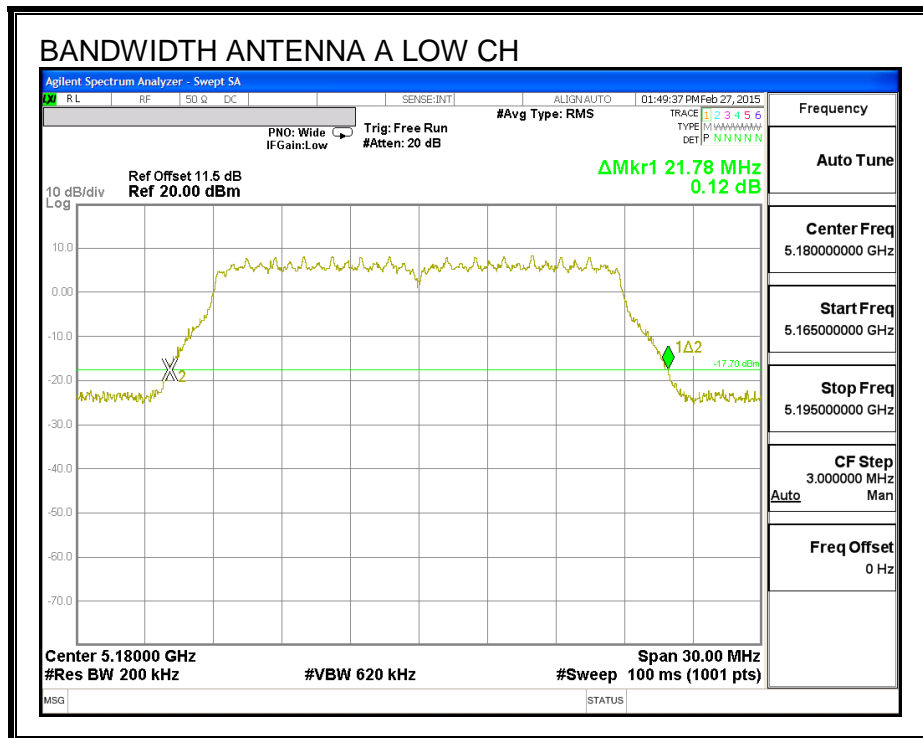

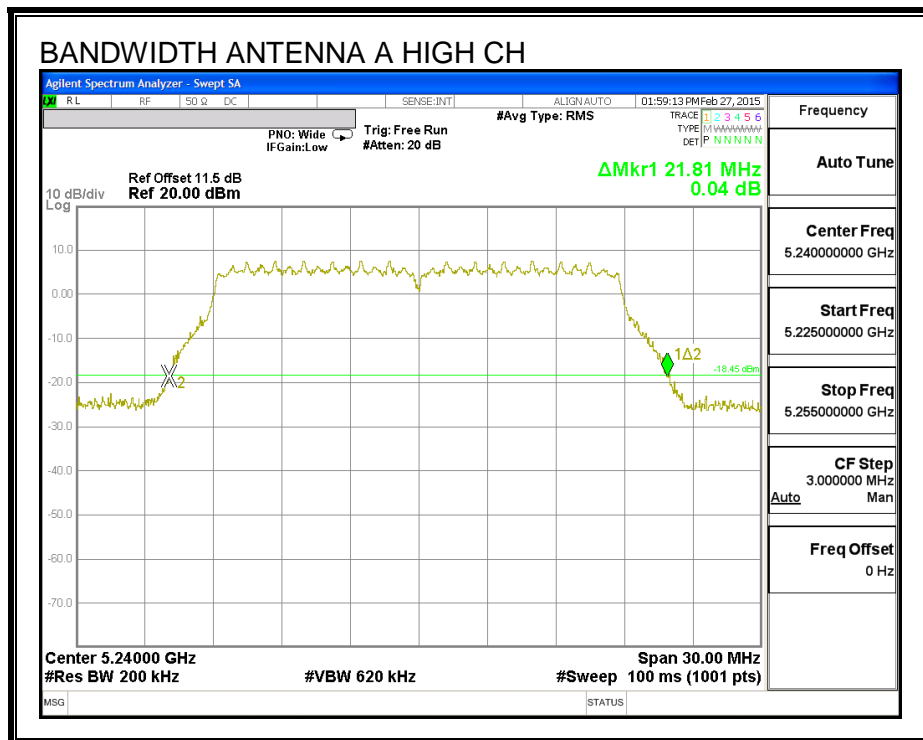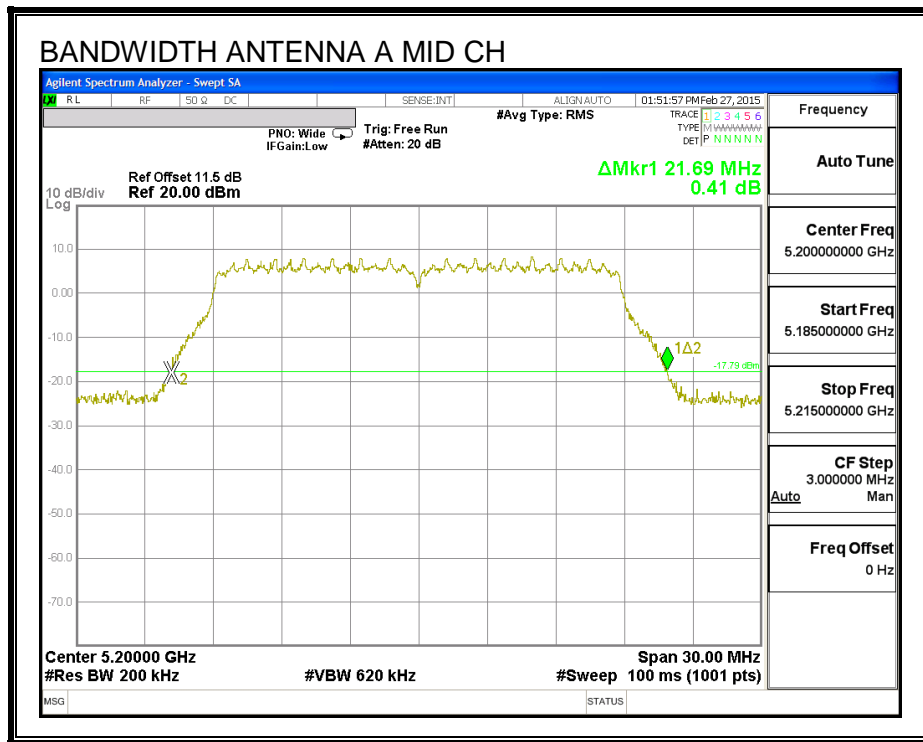

---

### 8.3.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5180	17.7490	17.7700
Mid	5200	17.7800	17.7830
High	5240	17.6730	17.7580



**99% BANDWIDTH, ANTENNA B**

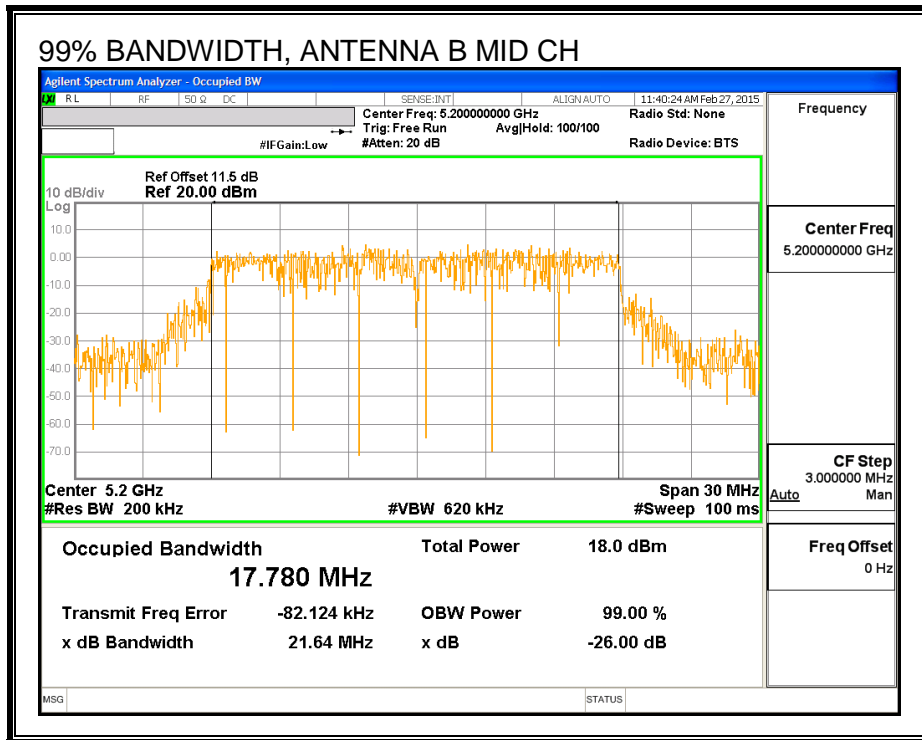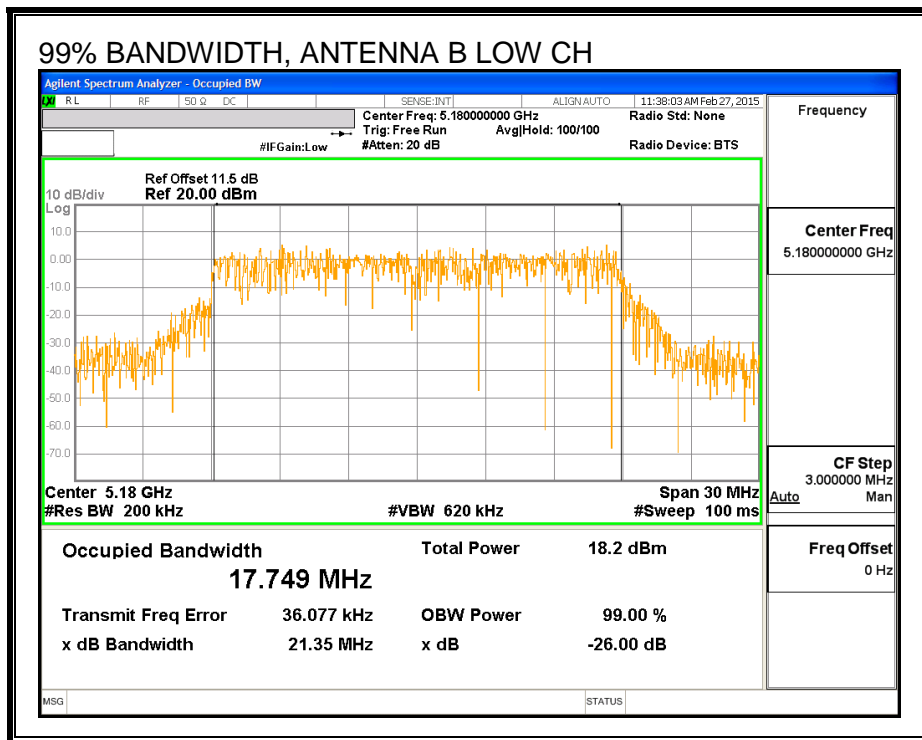

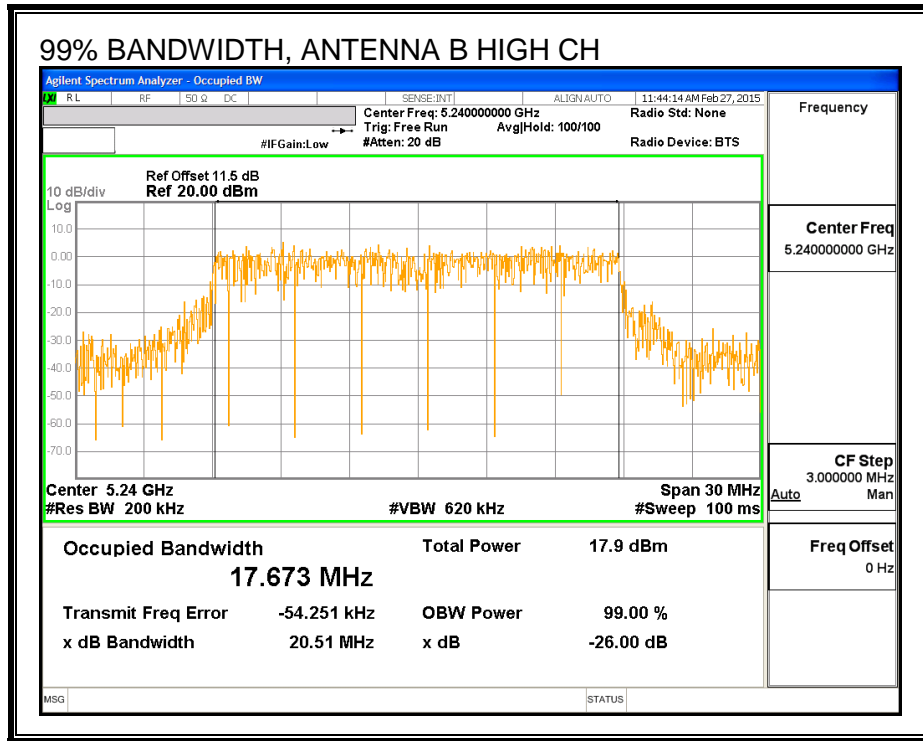

**99% BANDWIDTH, ANTENNA A**

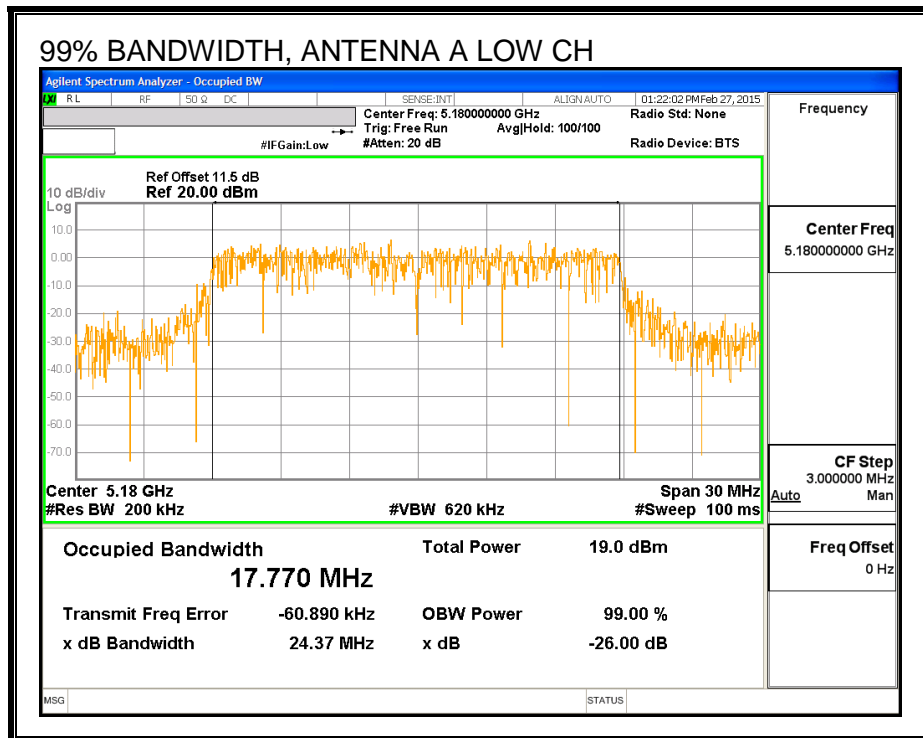

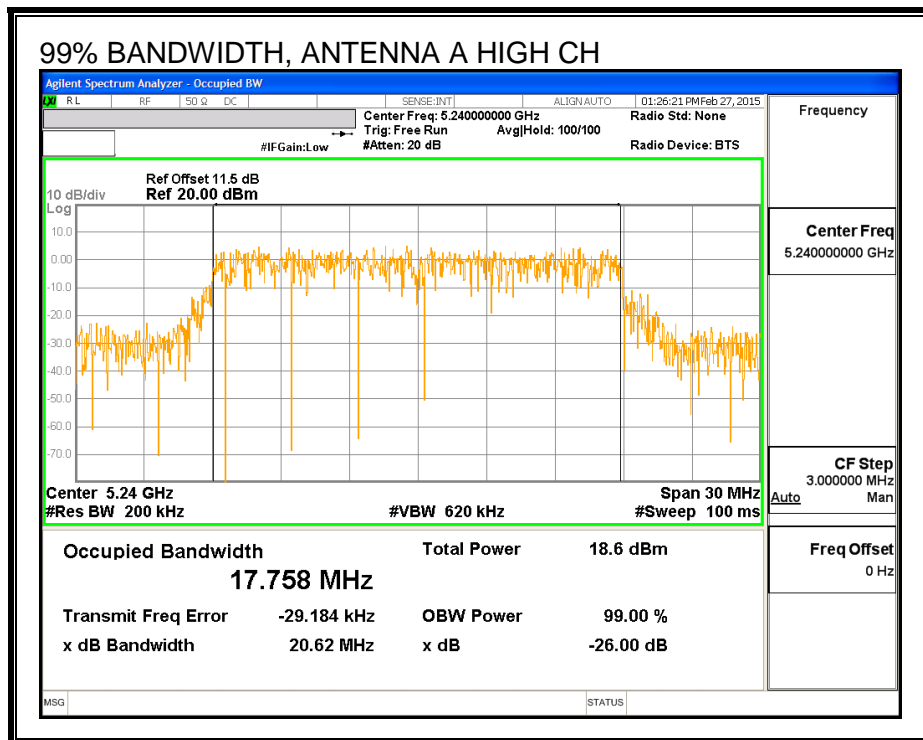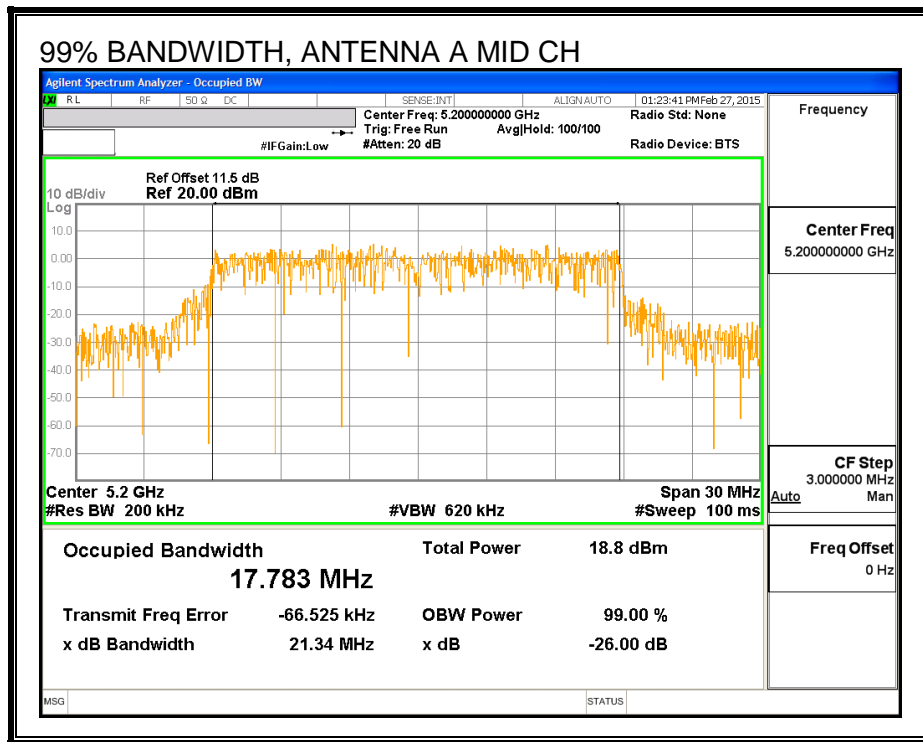

---

### 8.3.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5180	15.40	15.56	18.49
Mid	5200	15.95	16.00	18.99
High	5240	15.90	16.00	18.96

---

### 8.3.4. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
4.10	2.10	3.21

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
4.10	2.10	6.17

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	3.21	6.17	24.00	10.83
Mid	5200	3.21	6.17	24.00	10.83
High	5240	3.21	6.17	24.00	10.83

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.40	15.56	18.49	24.00	-5.51
Mid	5200	15.95	16.00	18.99	24.00	-5.01
High	5240	15.90	16.00	18.96	24.00	-5.04

**PSD Results**


Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	3.24	4.33	6.83	10.83	-4.00
Mid	5200	3.44	4.82	7.19	10.83	-3.64
High	5240	3.34	4.59	7.02	10.83	-3.81



**PSD, ANTENNA B**

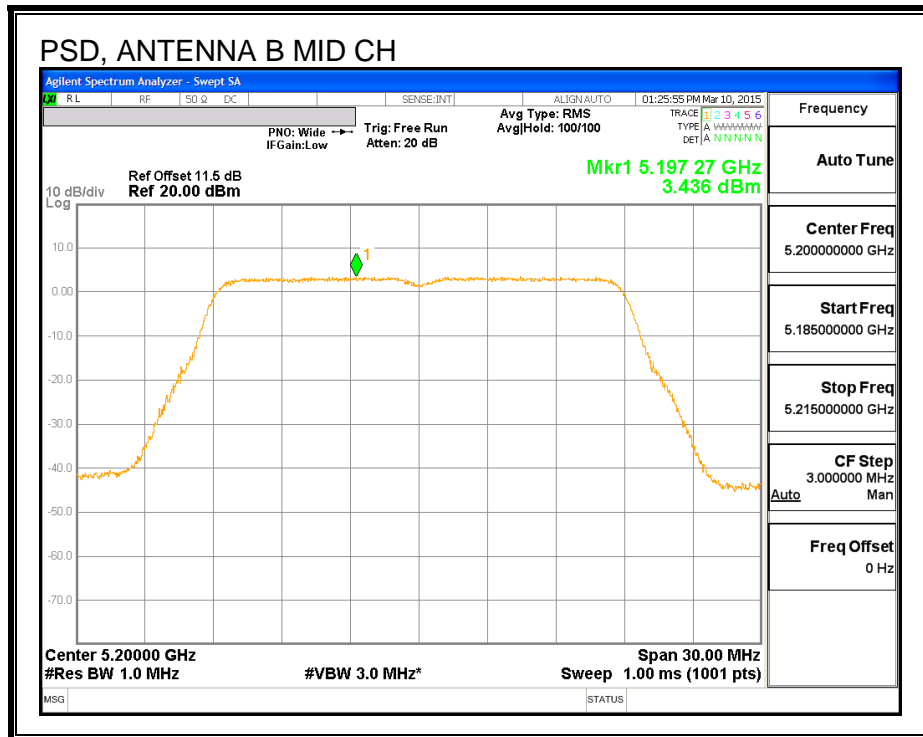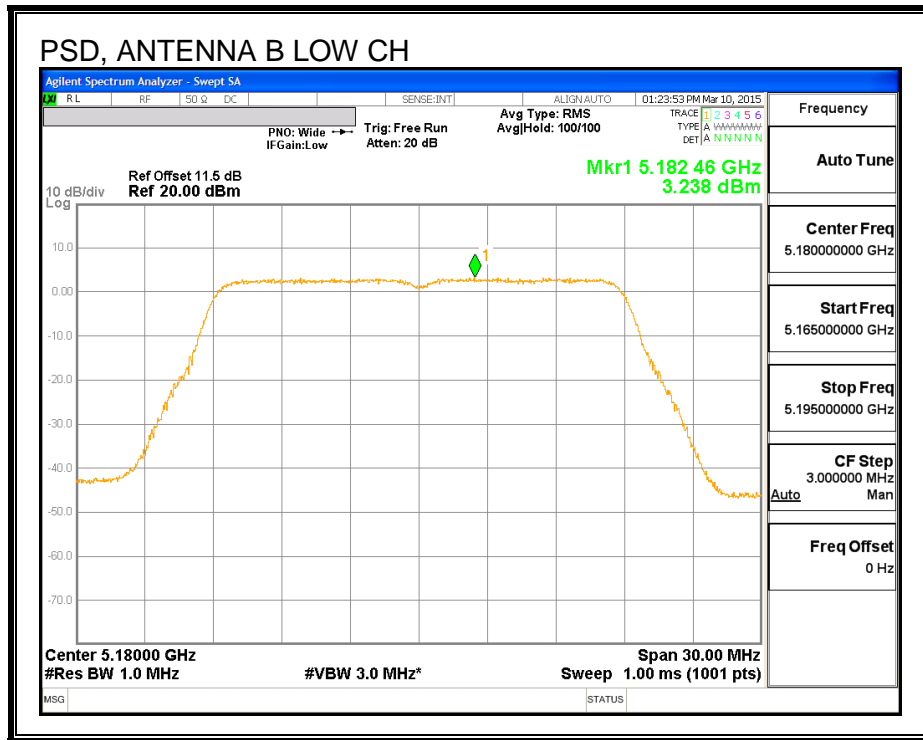

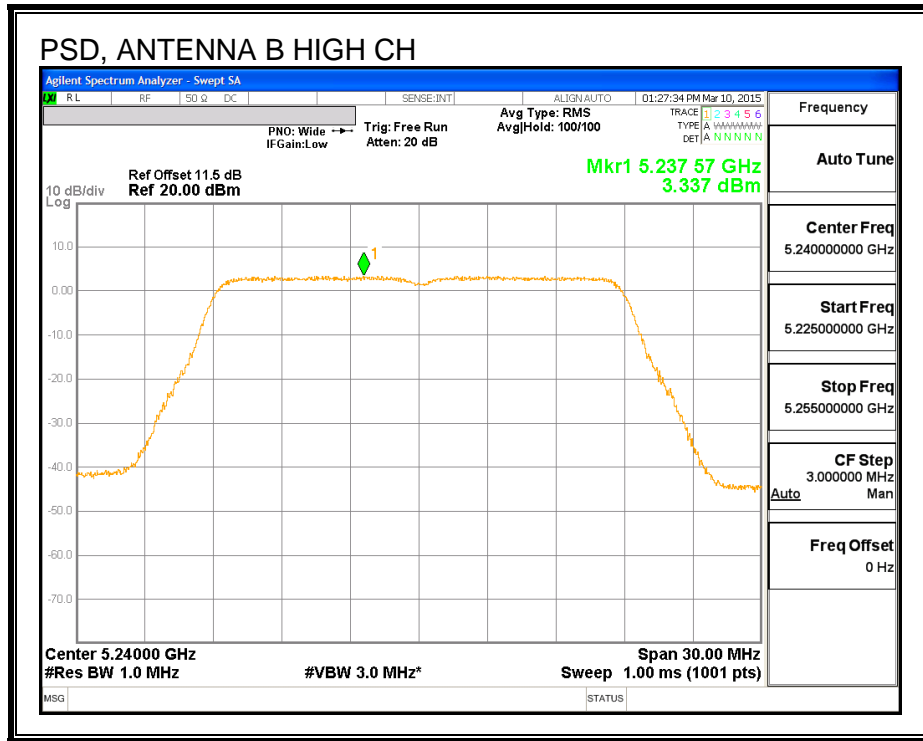

**PSD, ANTENNA A**

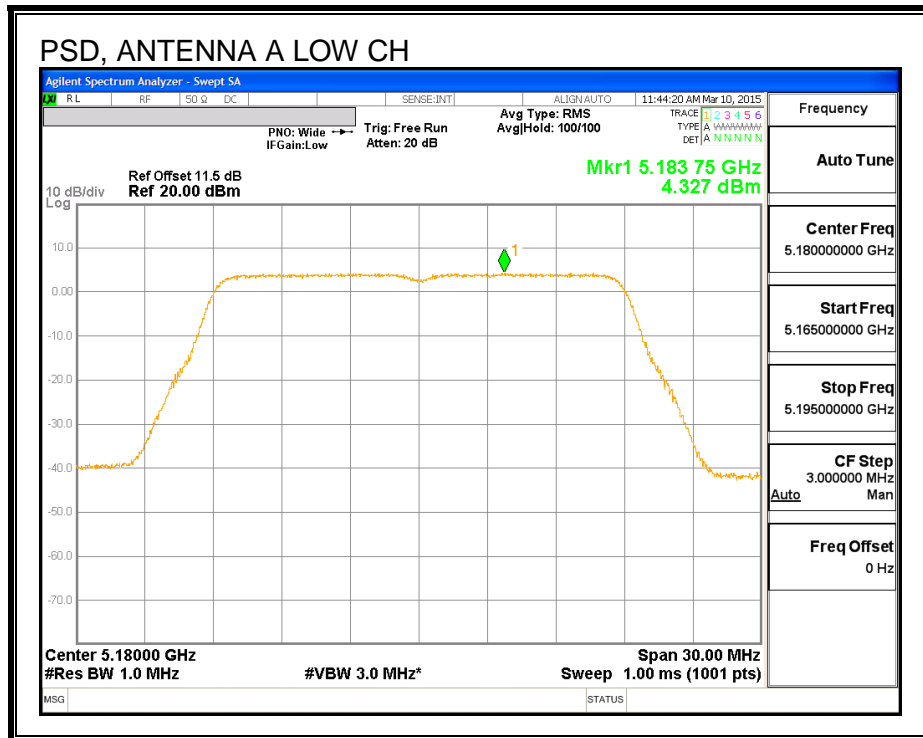

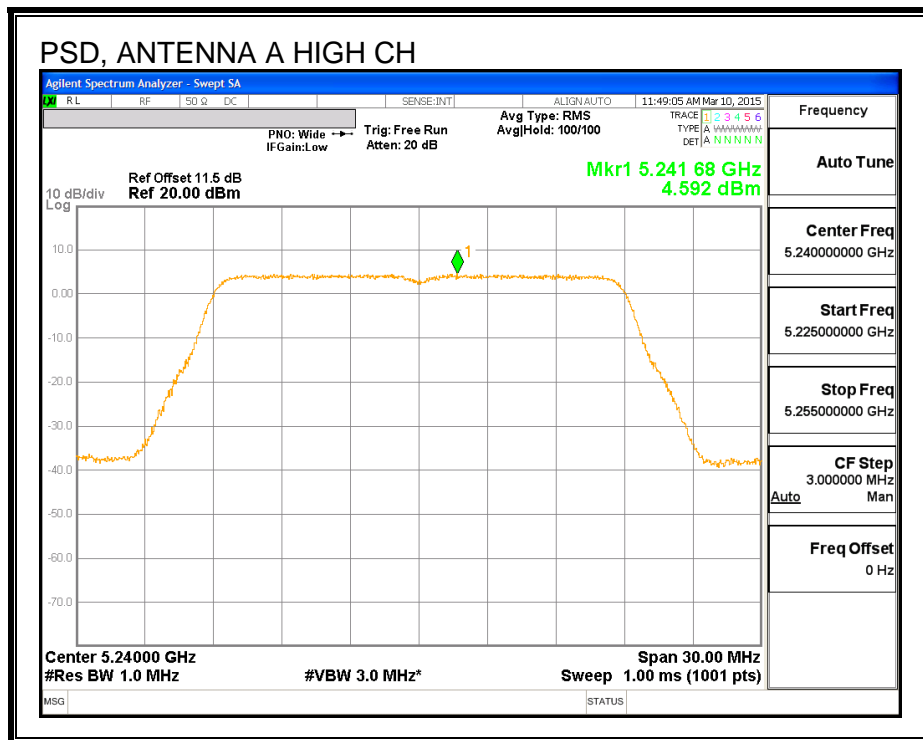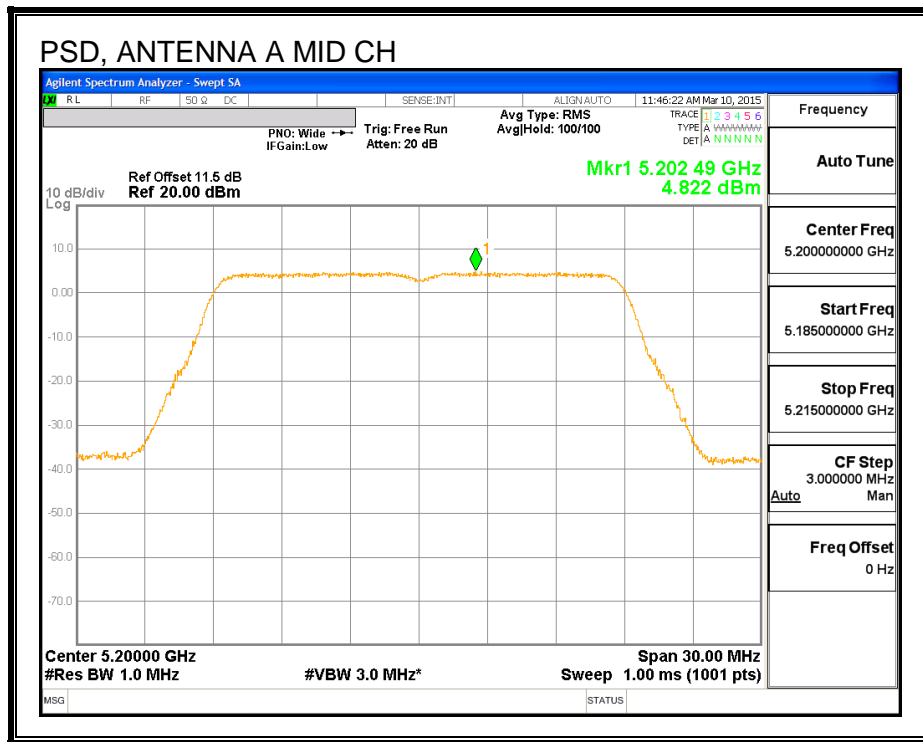

---

## 8.4. 802.11n HT20 2Tx STBC MODE IN THE 5.2 GHz BAND

### 8.4.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5180	21.90	21.84
Mid	5200	22.05	22.02
High	5240	22.02	21.87

**26 dB BANDWIDTH, ANTENNA B**

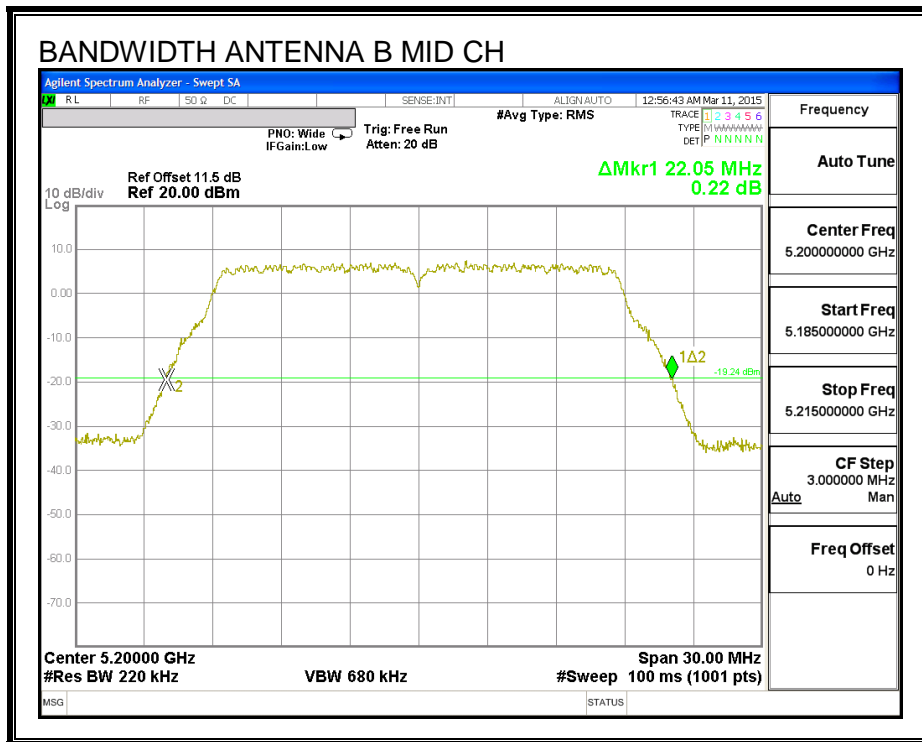
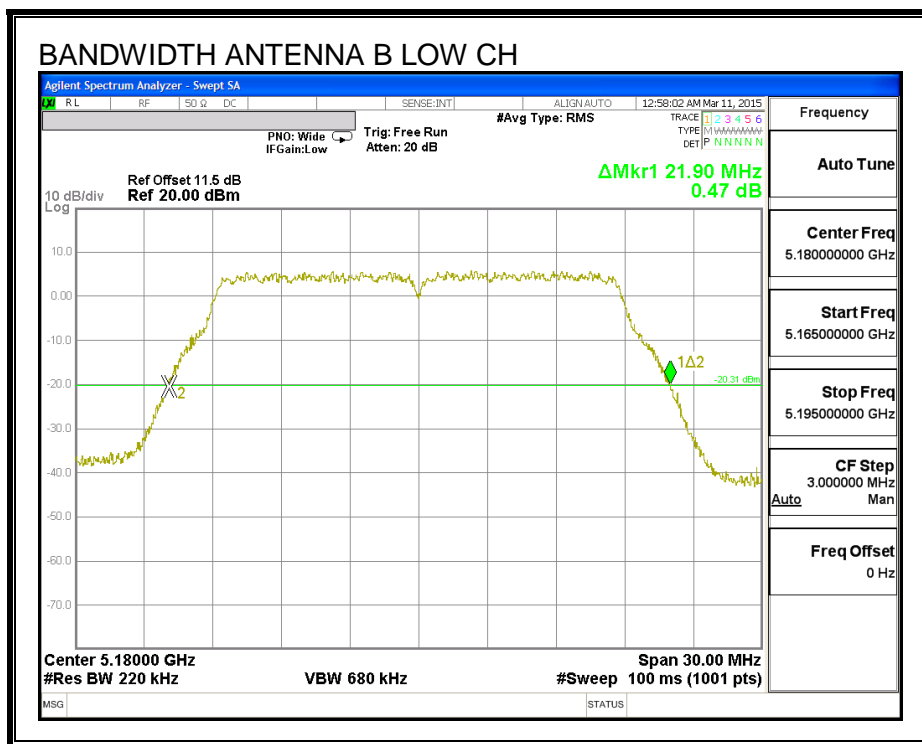


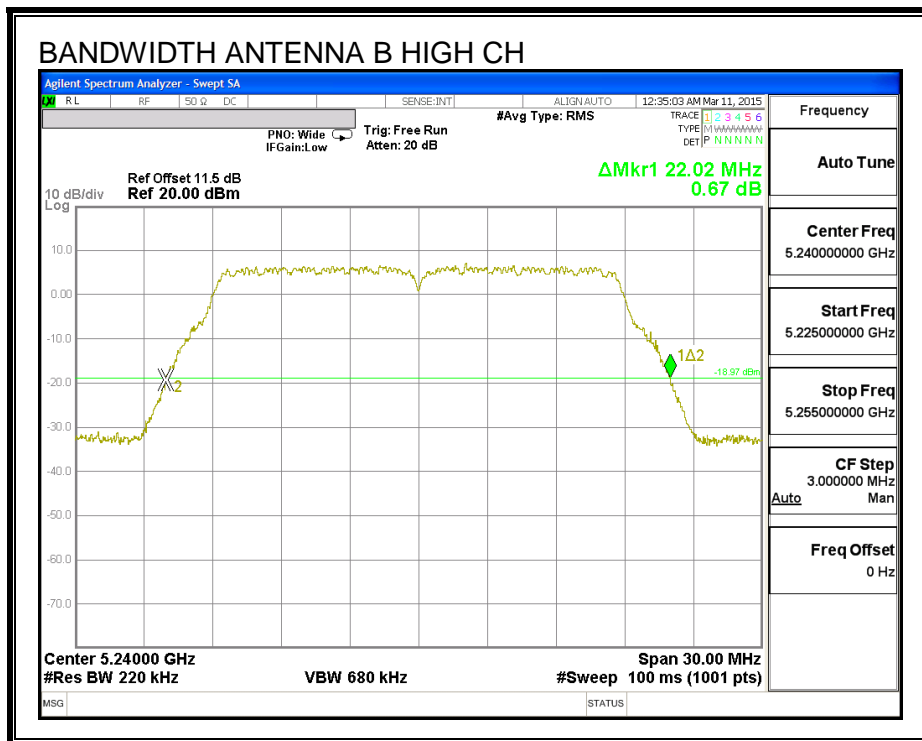

**26 dB BANDWIDTH, ANTENNA A**

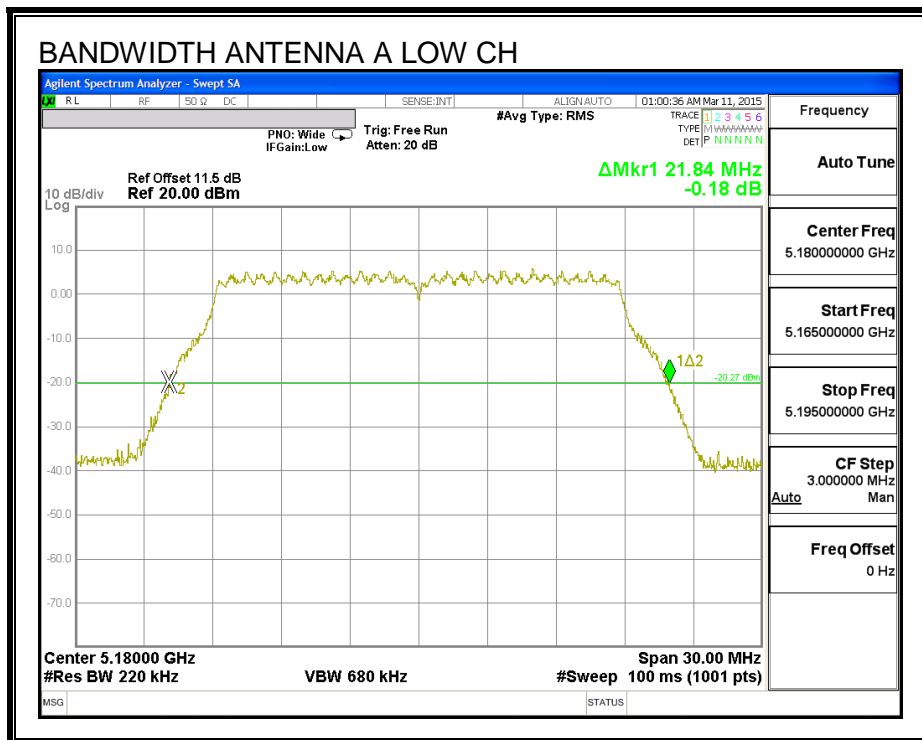



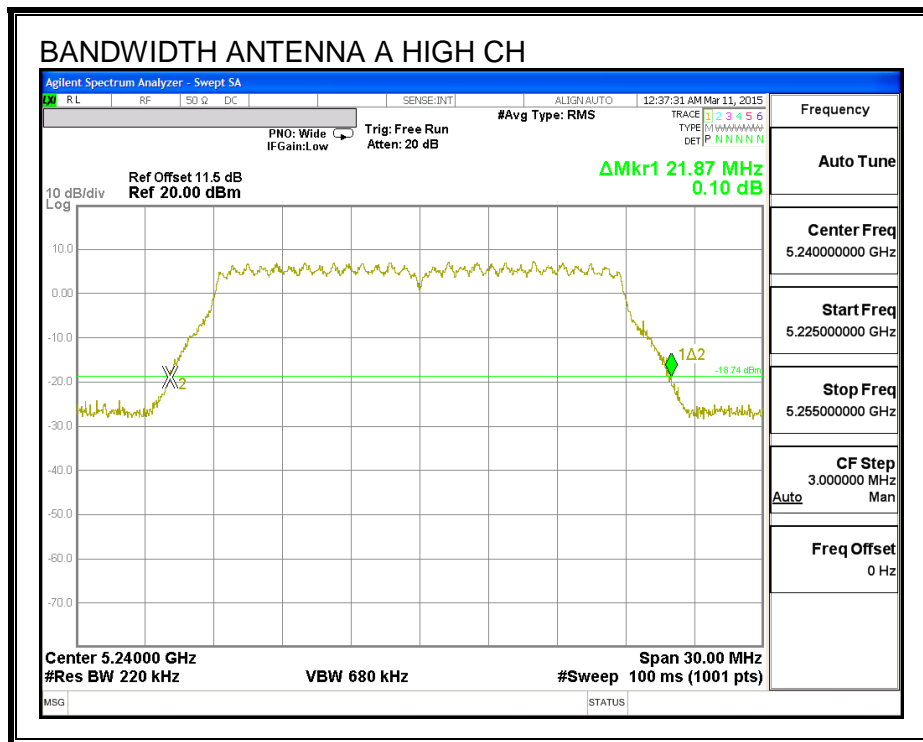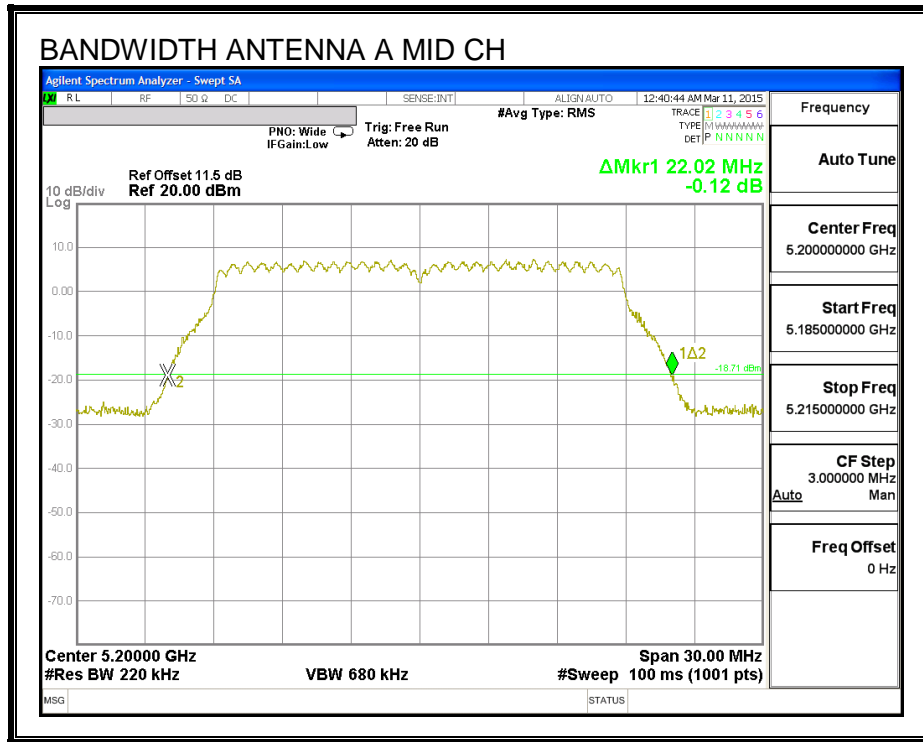

---

### 8.4.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5180	17.712	17.655
Mid	5200	17.698	17.782
High	5240	17.669	17.704



**99% BANDWIDTH, ANTENNA B**

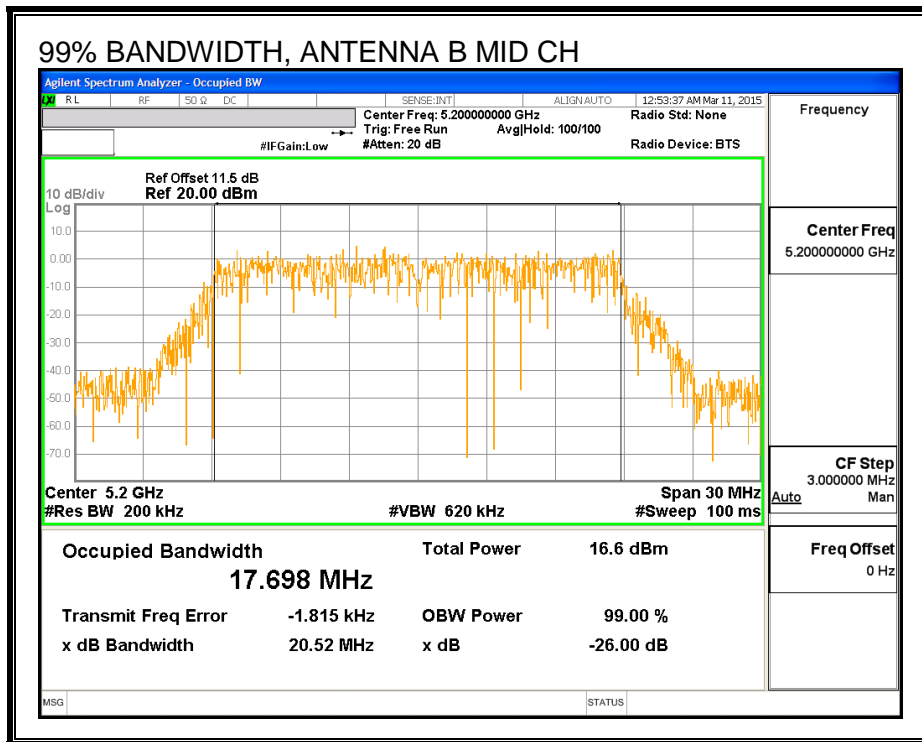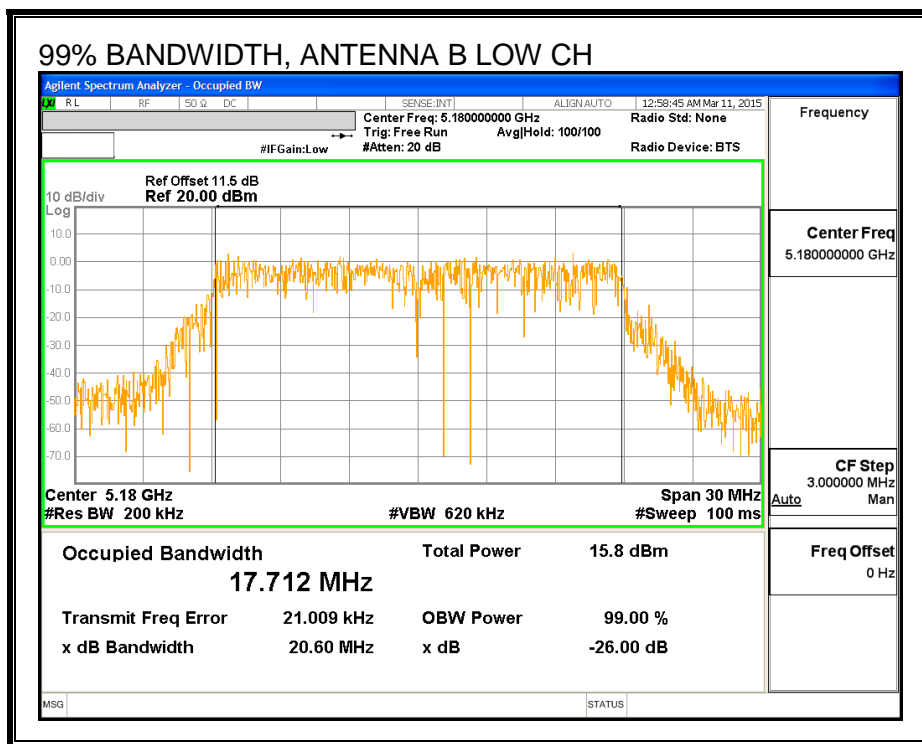

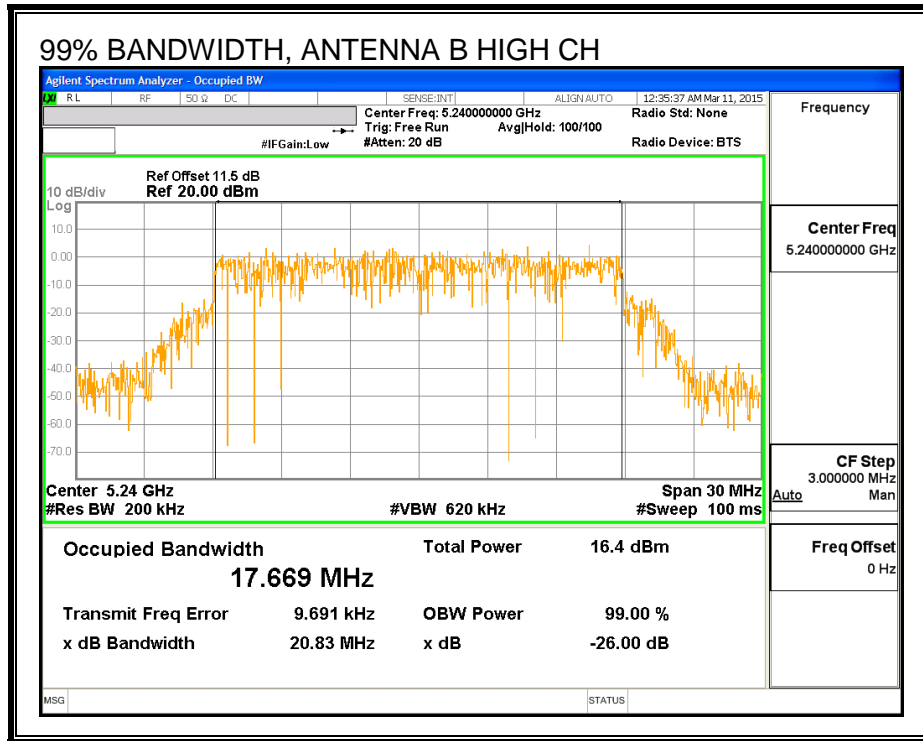

**99% BANDWIDTH, ANTENNA A**

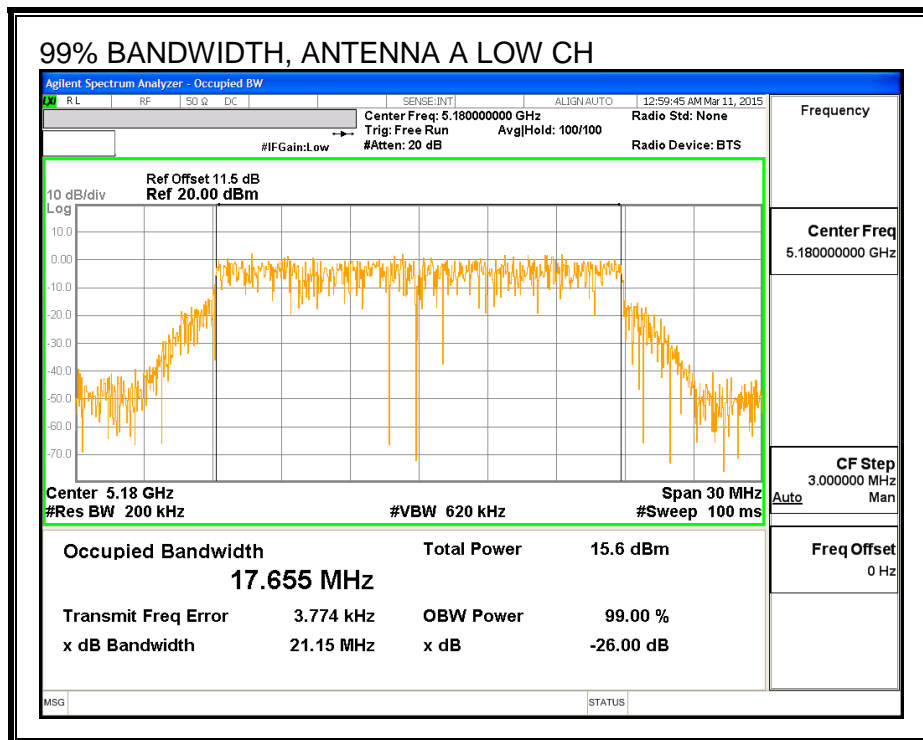

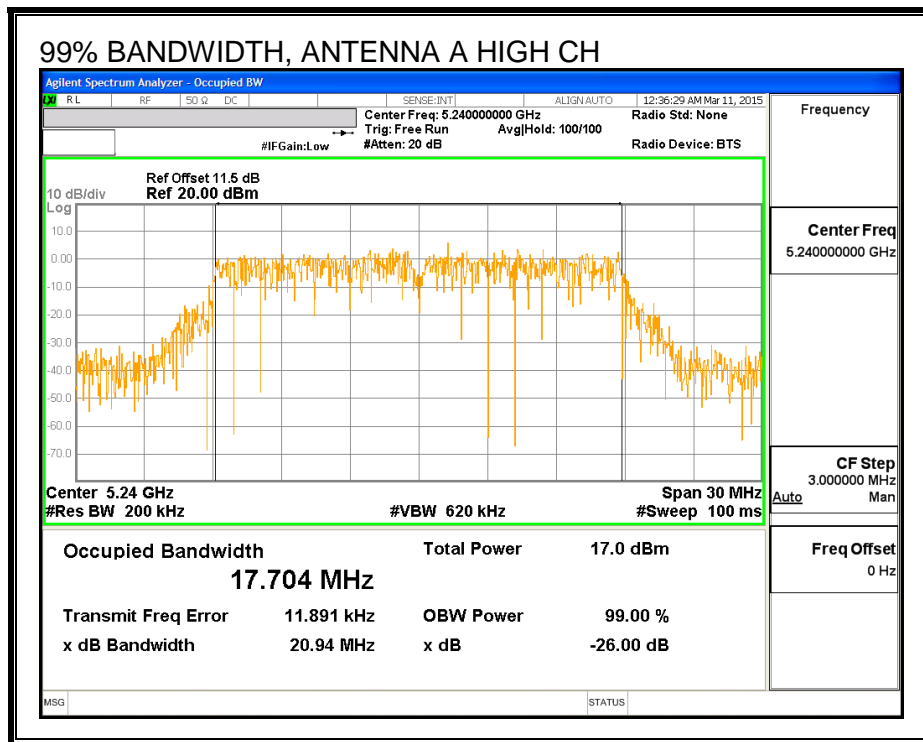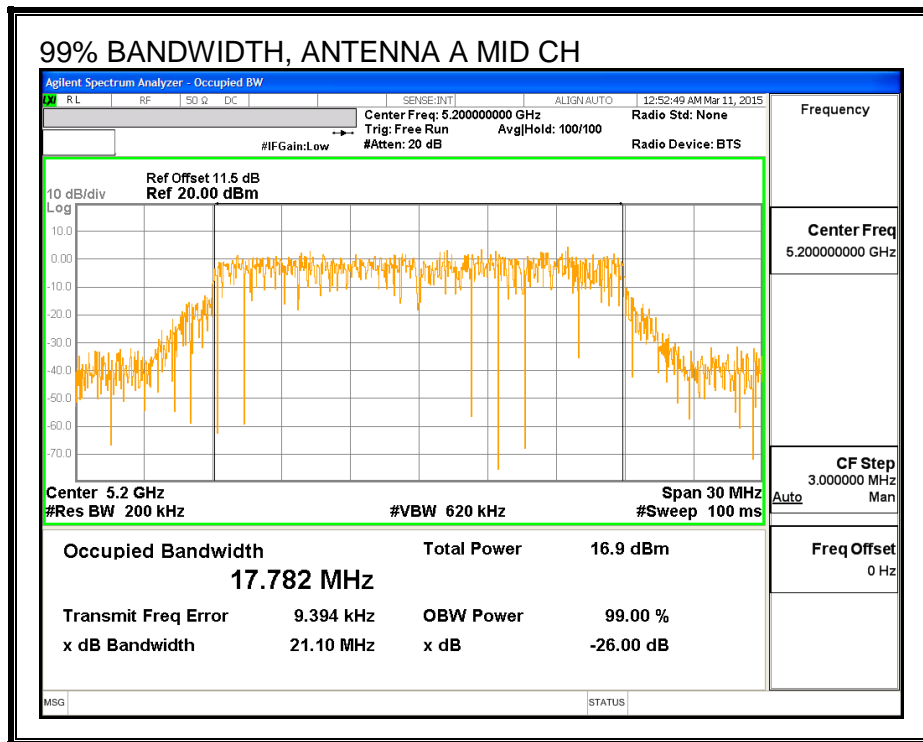

---

### 8.4.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5180	15.54	15.46	18.51
Mid	5200	16.43	17.05	19.76
High	5240	16.60	17.05	19.84

---

## 8.4.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

---

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
4.10	2.10	3.21



**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	3.21	3.21	24.00	11.00
Mid	5200	3.21	3.21	24.00	11.00
High	5240	3.21	3.21	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.54	15.46	18.51	24.00	-5.49
Mid	5200	16.43	17.05	19.76	24.00	-4.24
High	5240	16.60	17.05	19.84	24.00	-4.16

**PSD Results**


Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.44	4.25	7.35	11.00	-3.65
Mid	5200	5.13	5.86	8.52	11.00	-2.48
High	5240	5.31	5.75	8.55	11.00	-2.45



**PSD, ANTENNA B**

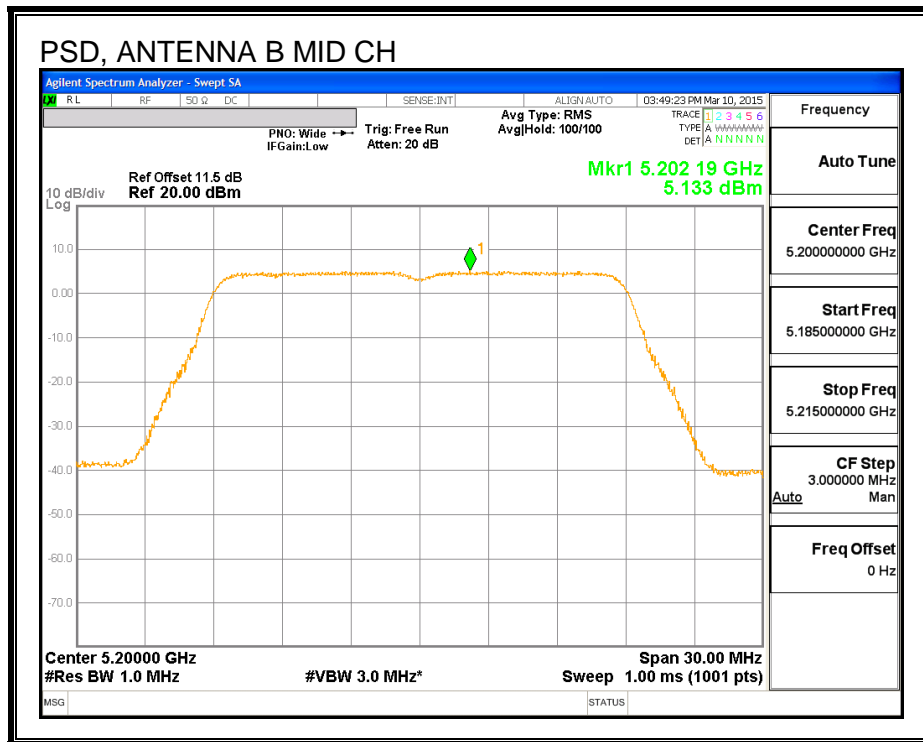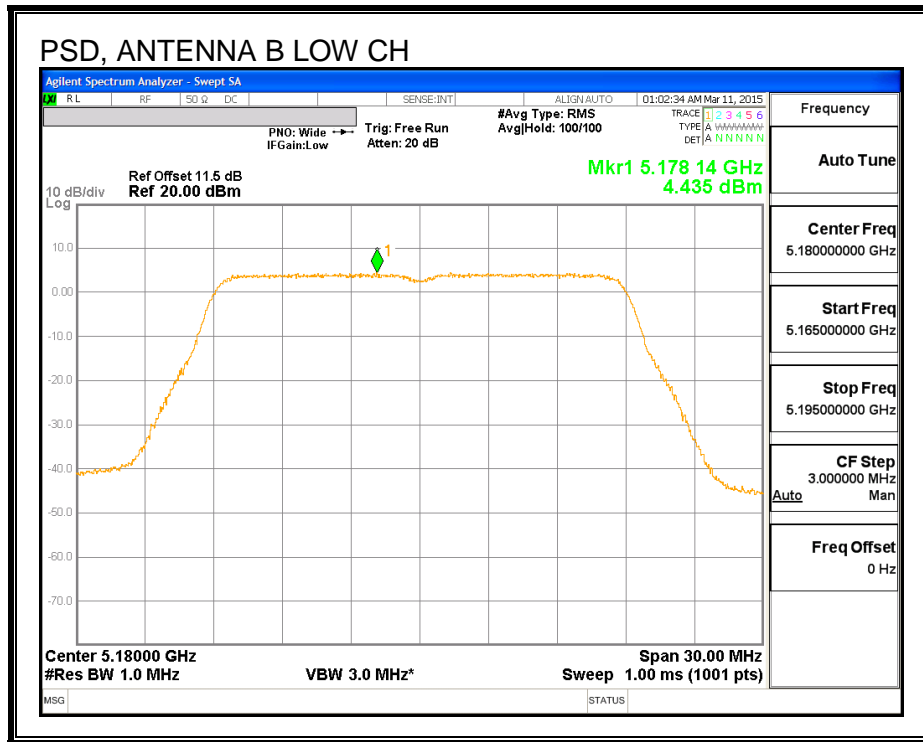

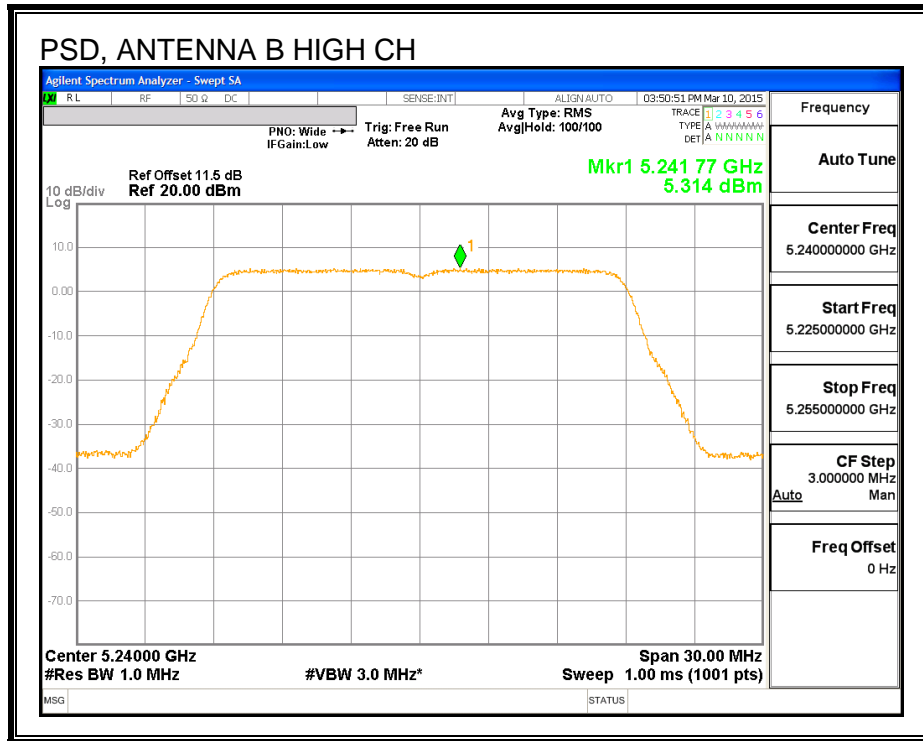

**PSD, ANTENNA A**

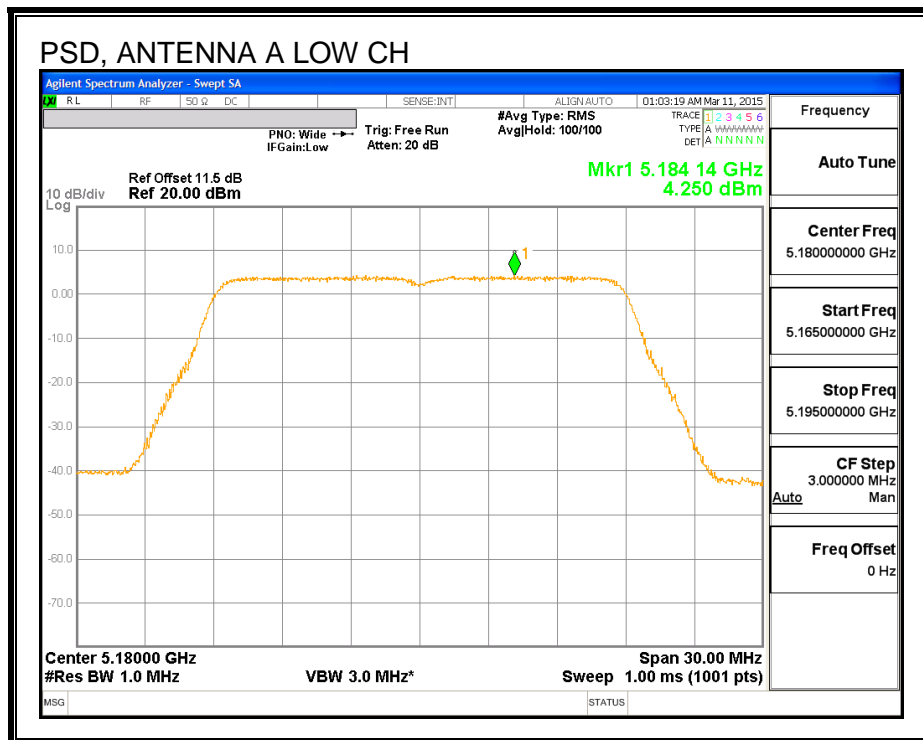

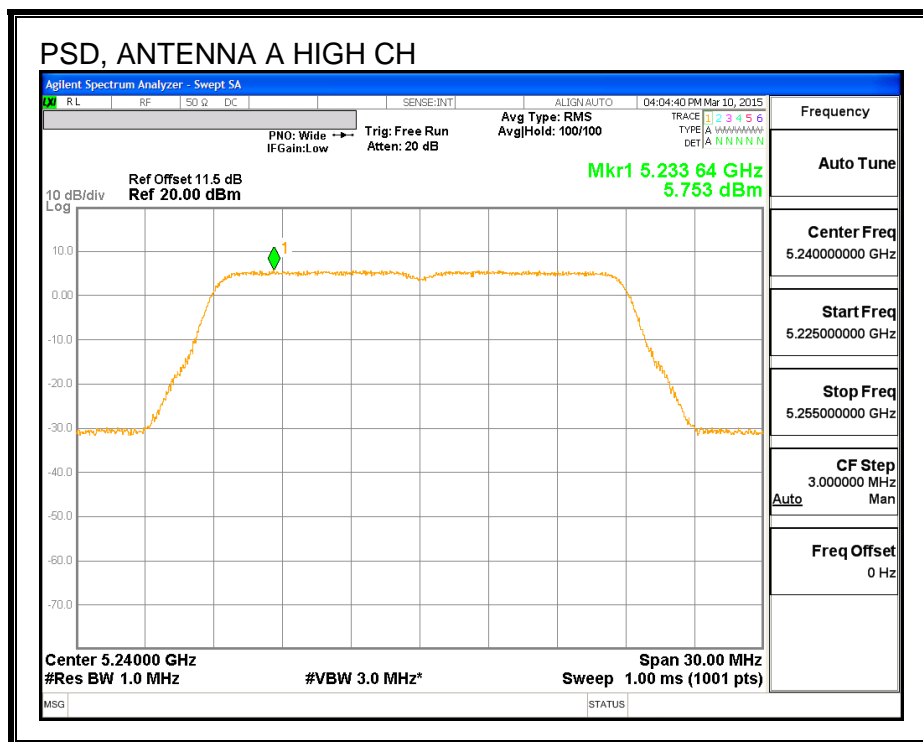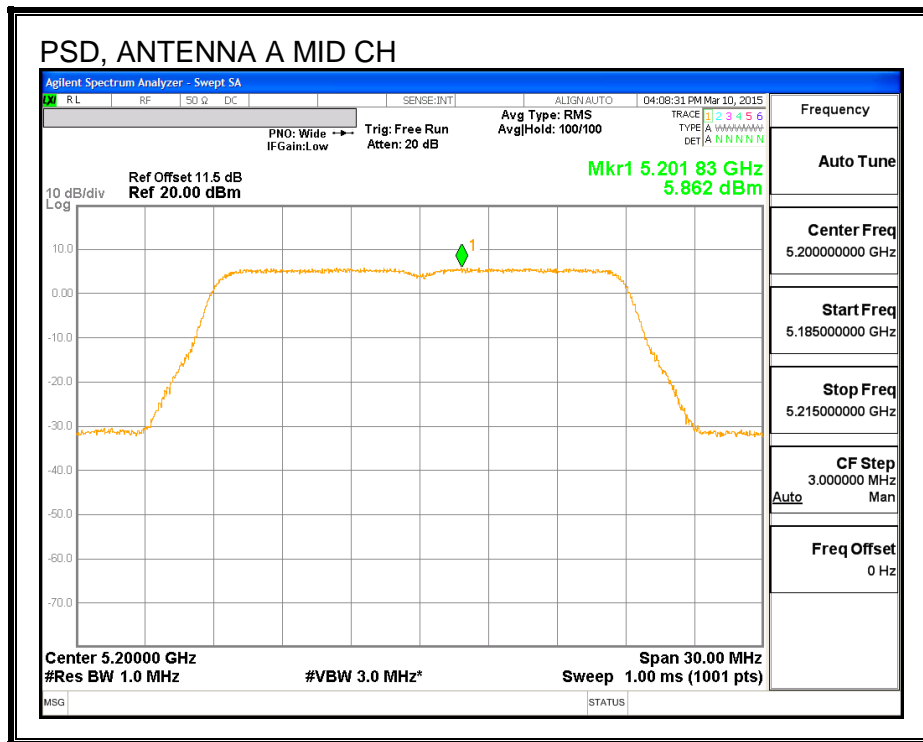

---

## 8.5. 802.11n HT40 SISO MODE IN THE 5.2 GHz BAND ANTENNA B

### 8.5.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.32
High	5230	40.08

**26 dB BANDWIDTH**

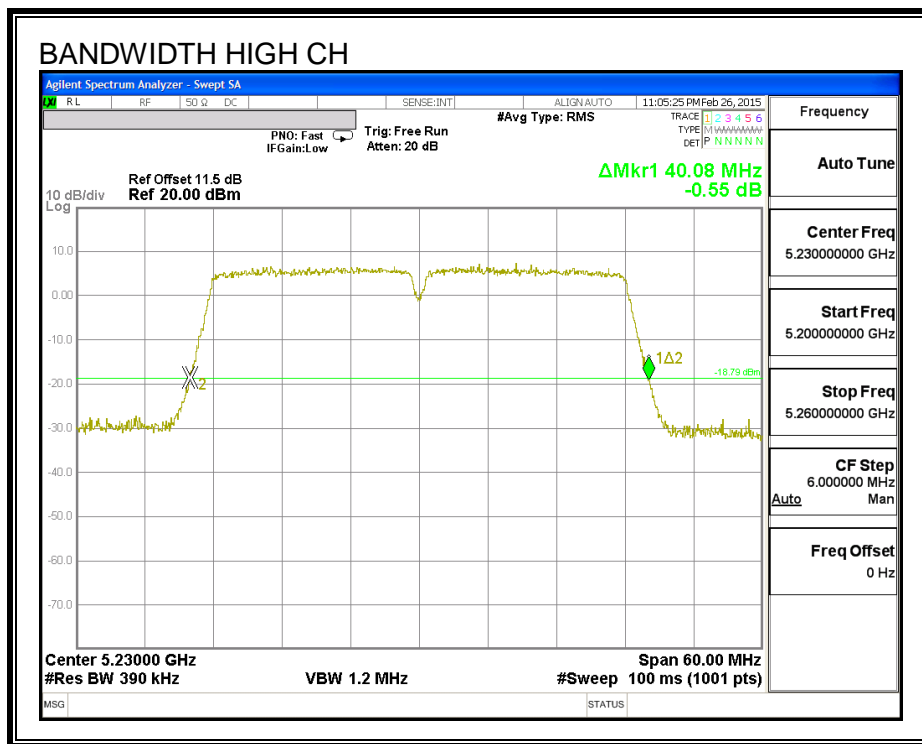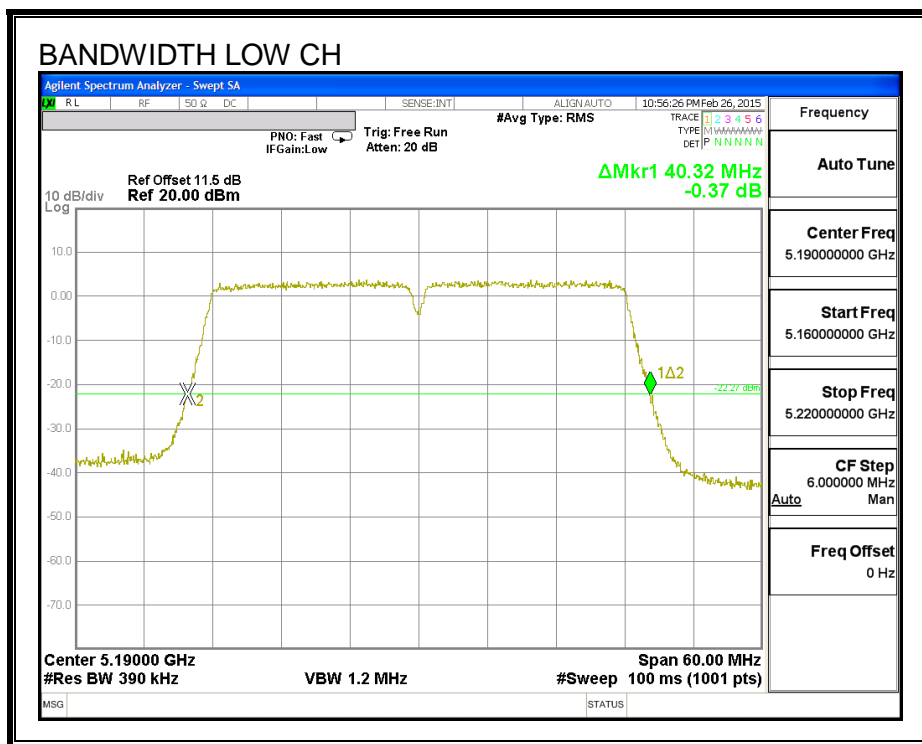

### 8.5.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.2780
High	5230	36.4100

**99% BANDWIDTH**

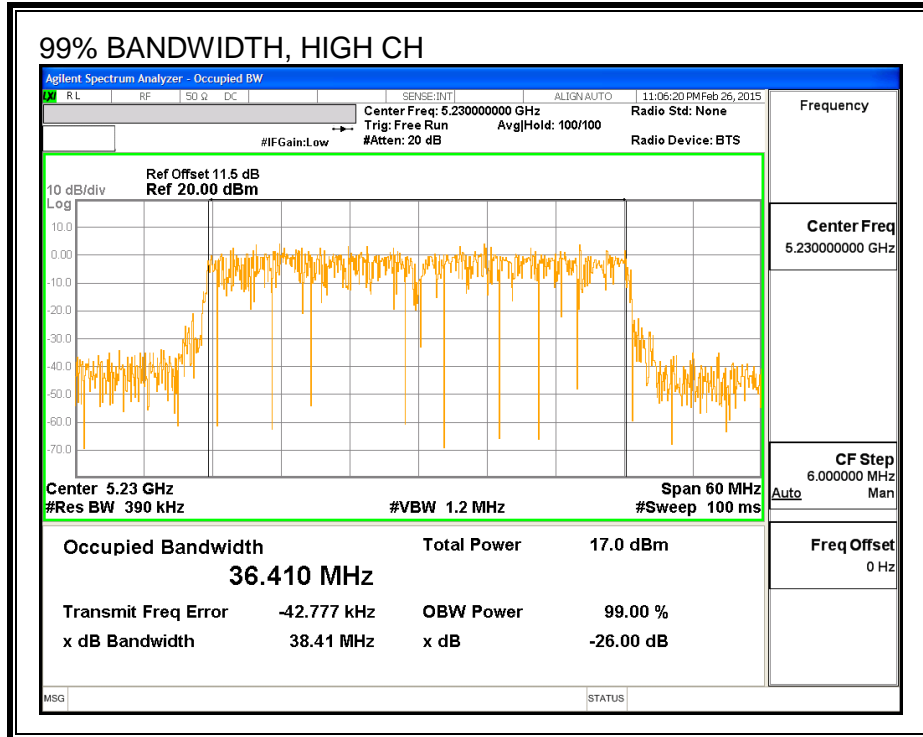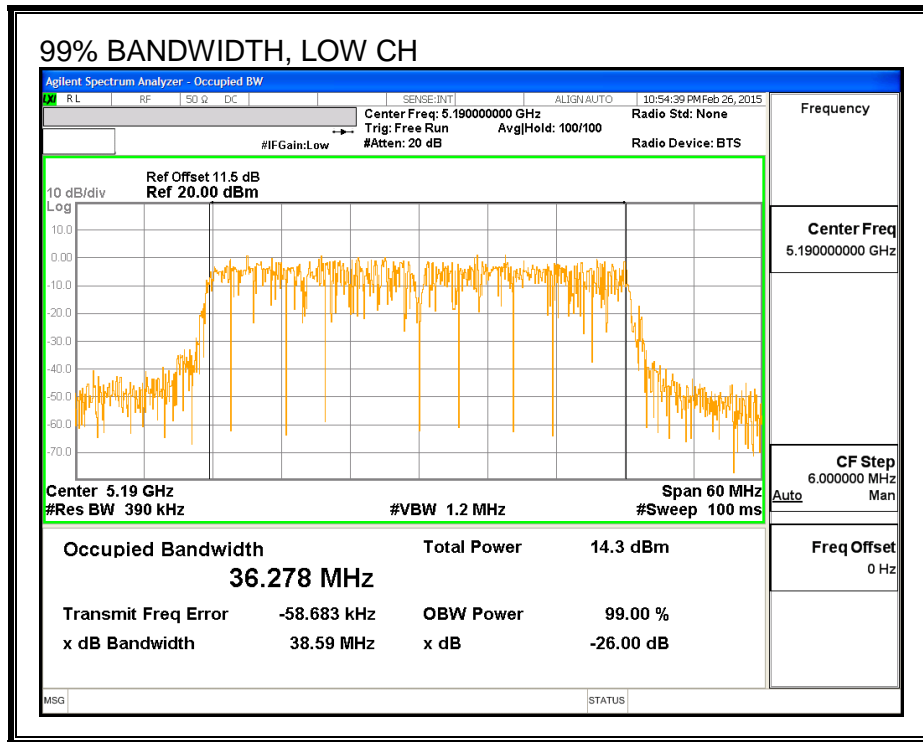



### 8.5.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.50
High	5230	16.52

---

## 8.5.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

### RESULTS

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	4.10	4.10	24.00	11.00
High	5230	4.10	4.10	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.50	13.50	24.00	-10.50
High	5230	16.52	16.52	24.00	-7.48

**PSD Results**

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.34	-0.34	11.00	-11.34
High	5230	2.30	2.30	11.00	-8.70

**PSD, ANTENNA B**

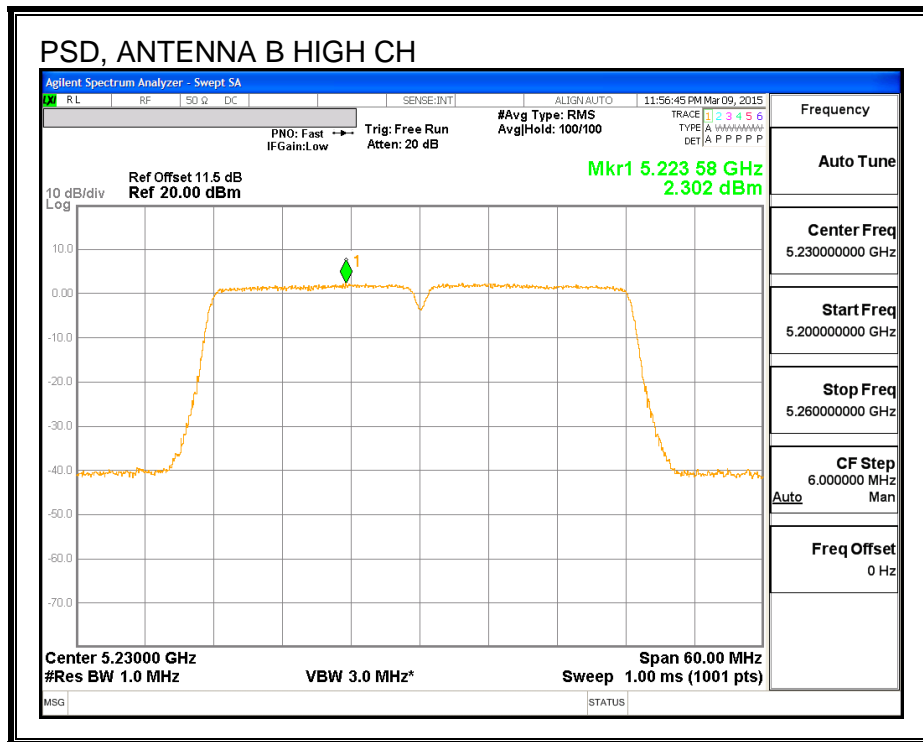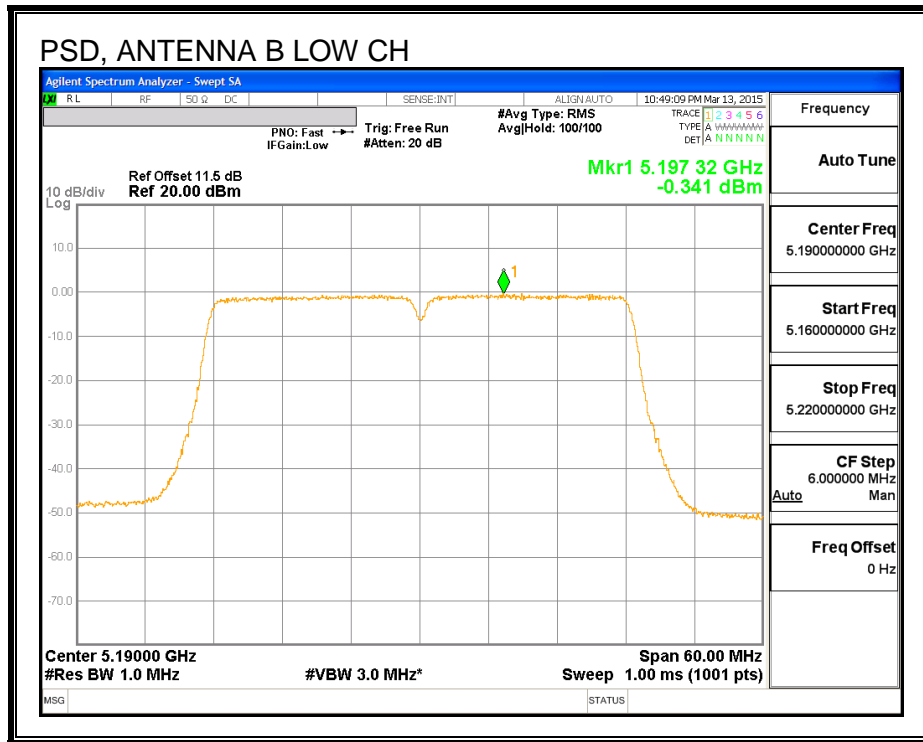

---

## 8.6. 802.11n HT40 SISO MODE IN THE 5.2 GHz BAND ANTENNA A

### 8.6.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.20
High	5230	40.50

**26 dB BANDWIDTH**

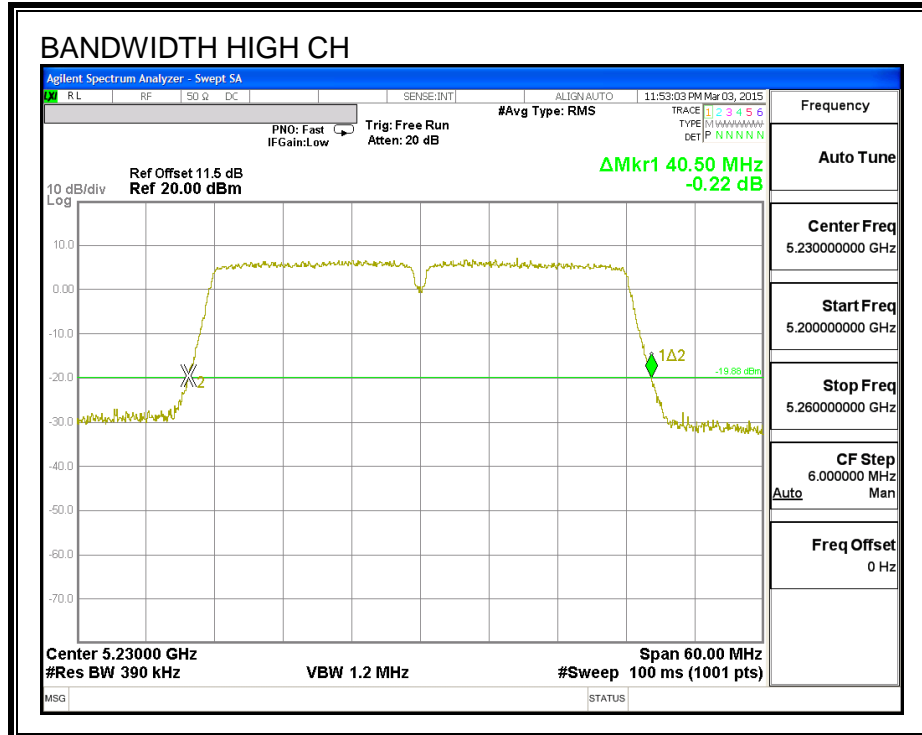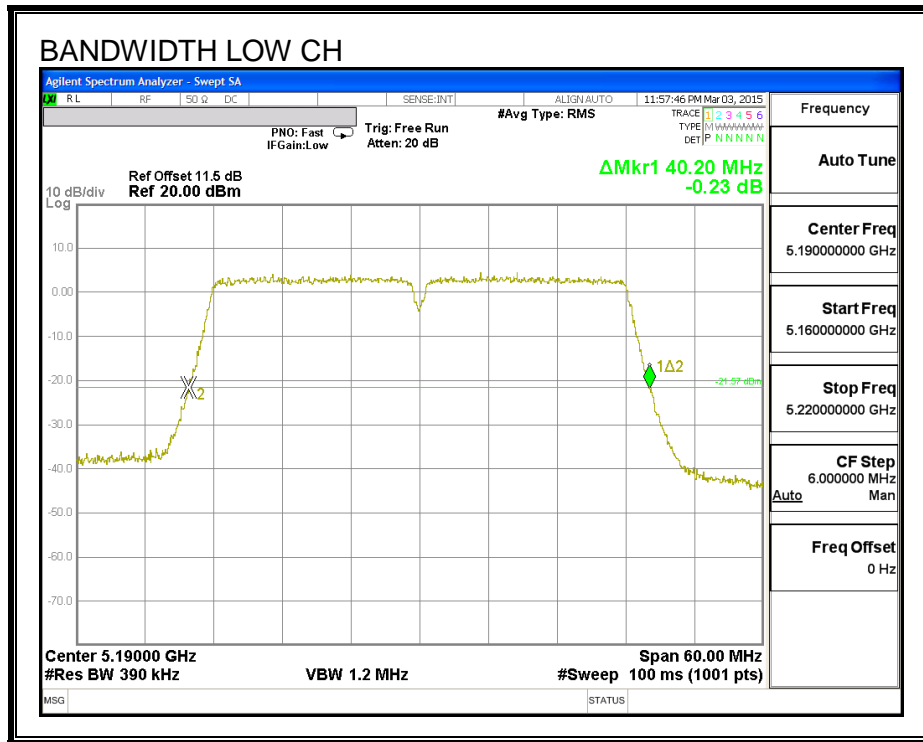

### 8.6.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.402
High	5230	36.184

**99% BANDWIDTH**

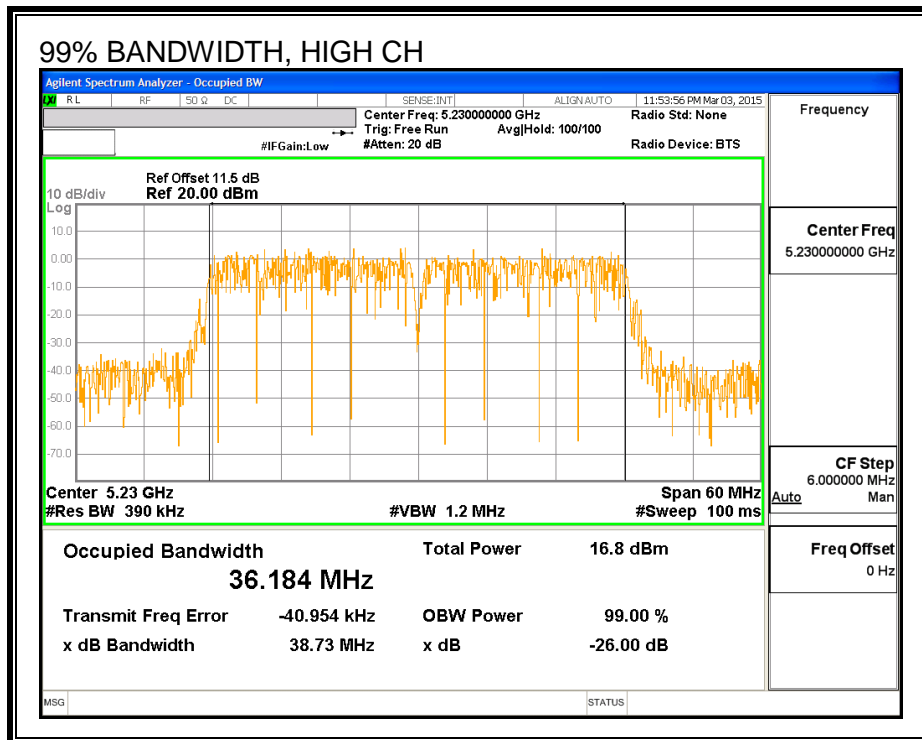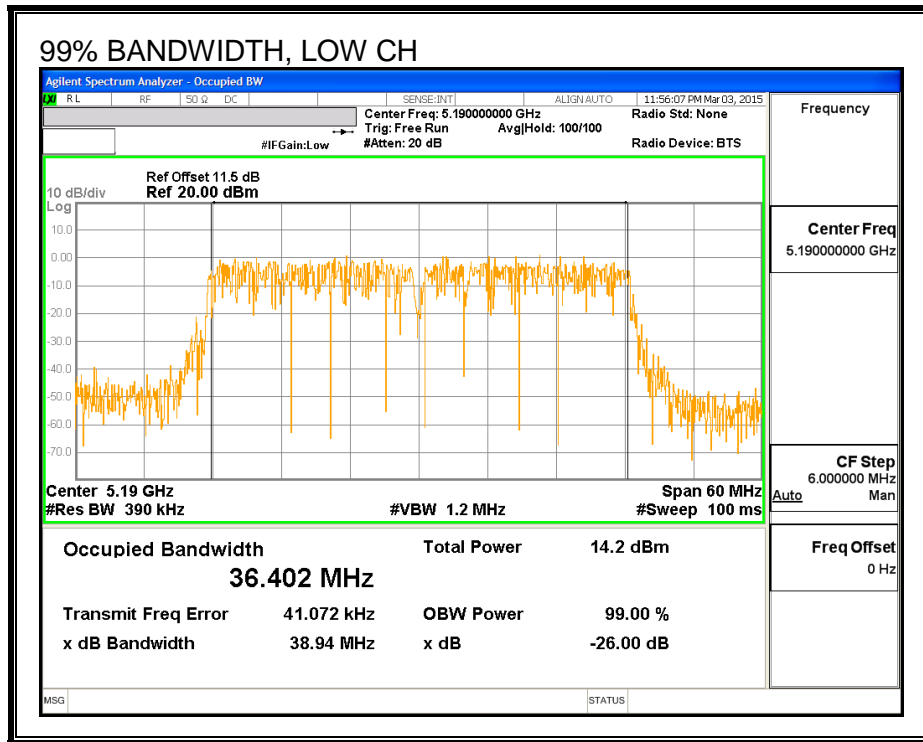



### 8.6.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.45
High	5230	17.05

---

## 8.6.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

### RESULTS

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.10	2.10	24.00	11.00
High	5230	2.10	2.10	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.45	13.45	24.00	-10.55
High	5230	17.05	17.05	24.00	-6.95

**PSD Results**

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-1.02	-1.02	11.00	-12.02
High	5230	2.94	2.94	11.00	-8.06

**PSD, ANTENNA A**

