

---

## 8.7. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND

### 8.7.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.



#### RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5190	40.20	40.08
High	5230	40.32	40.02

**26 dB BANDWIDTH, ANTENNA B**

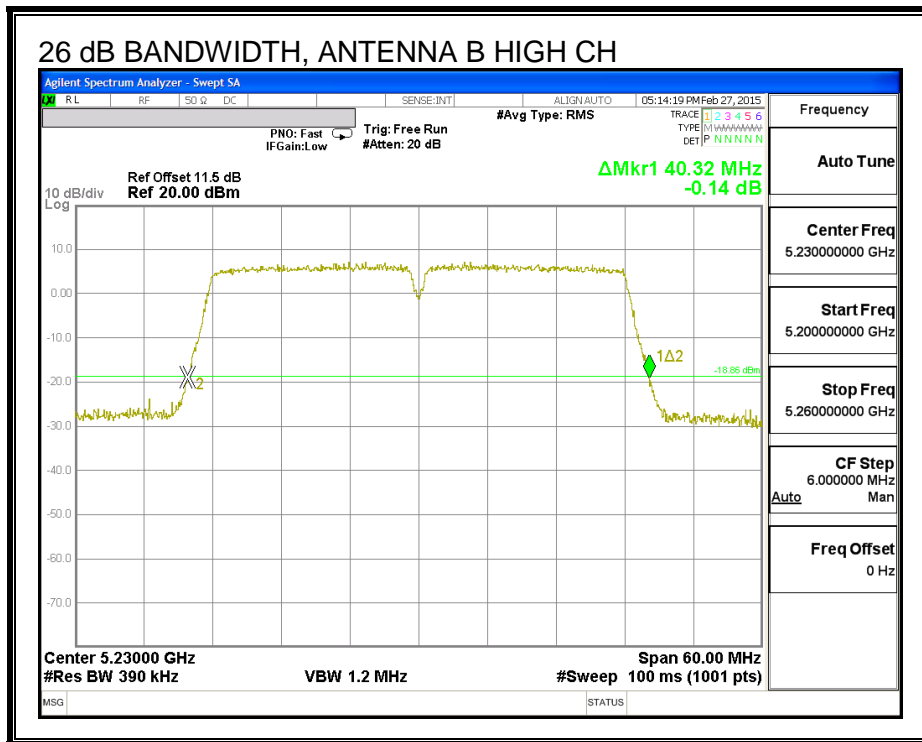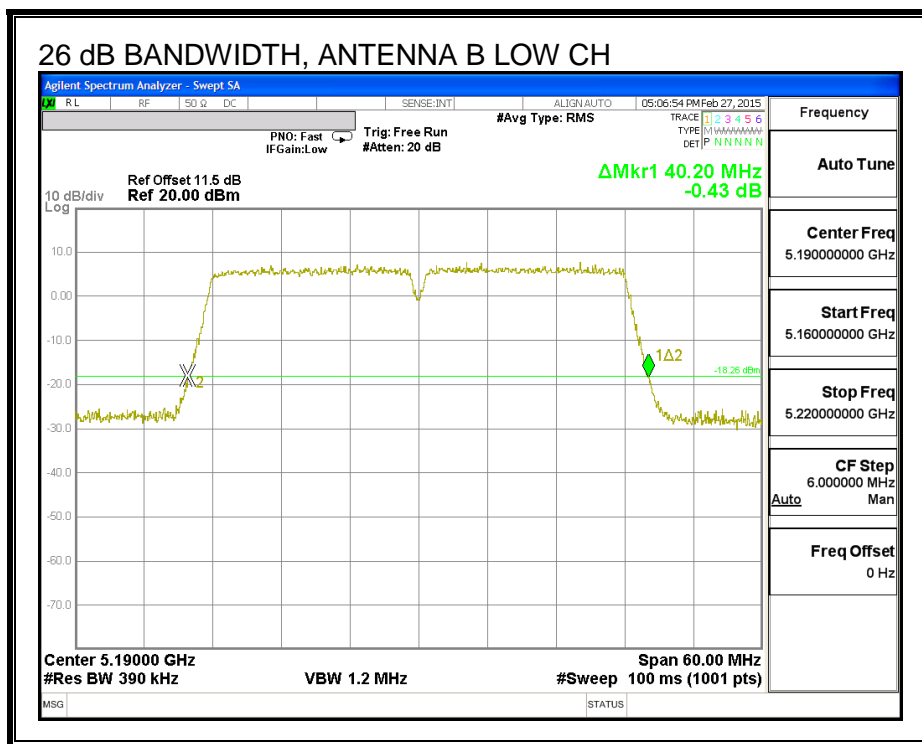

**26 dB BANDWIDTH, ANTENNA A**

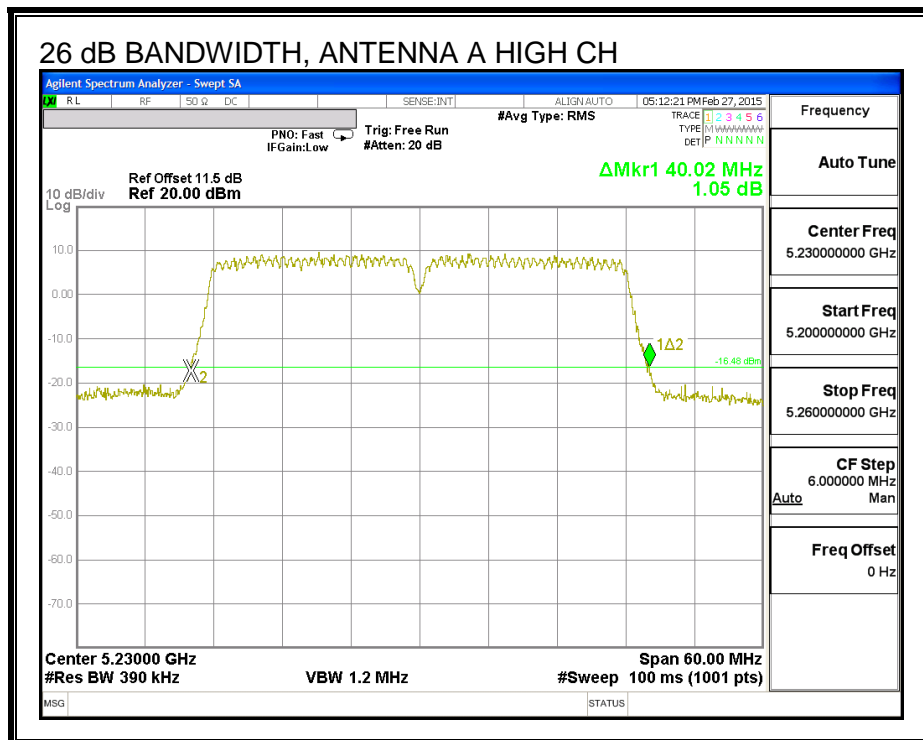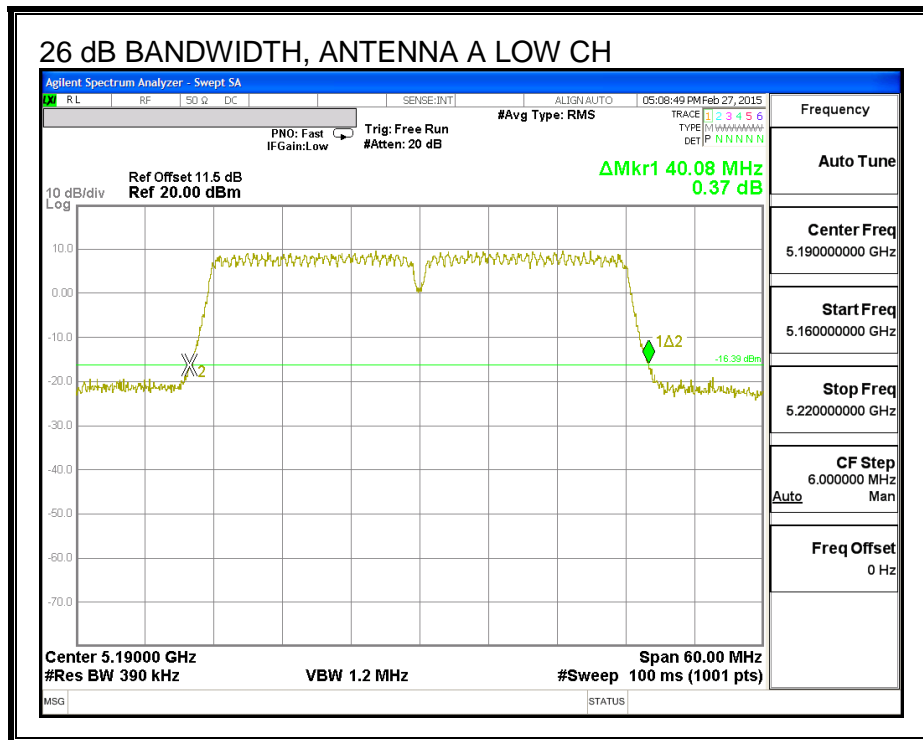

---

### 8.7.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.



#### RESULTS

Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5190	36.222	36.353
High	5230	36.313	36.095

**99% BANDWIDTH, ANTENNA B**

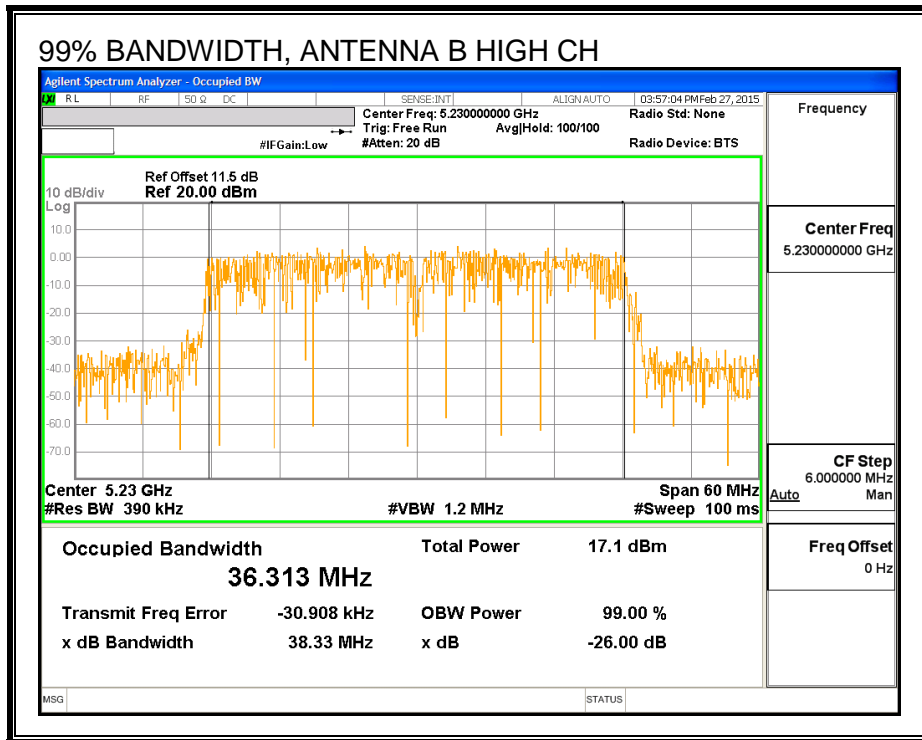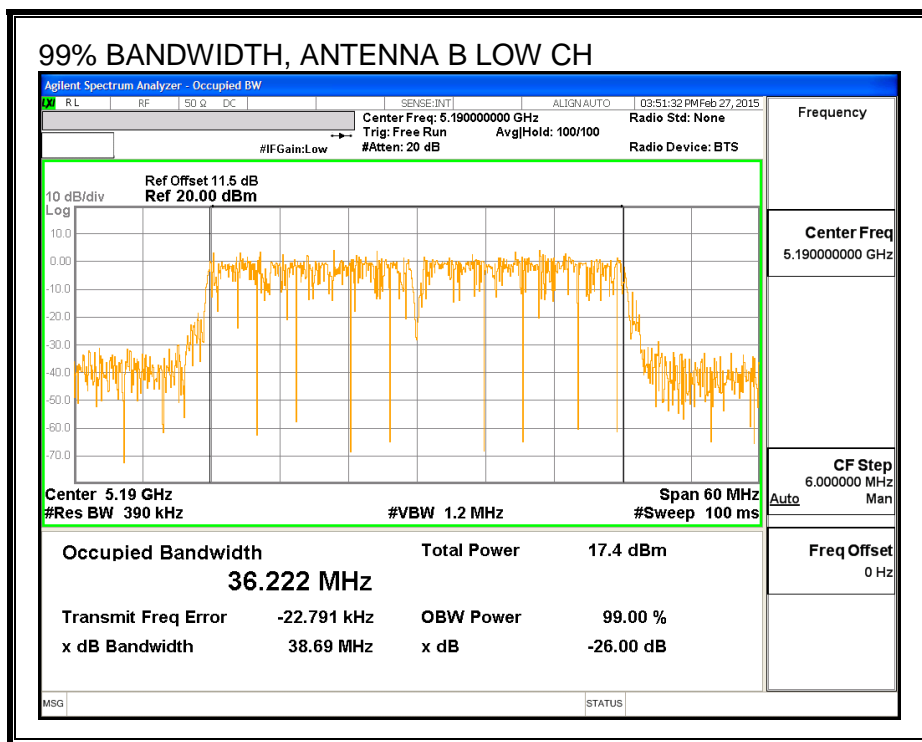

**99% BANDWIDTH, ANTENNA A**

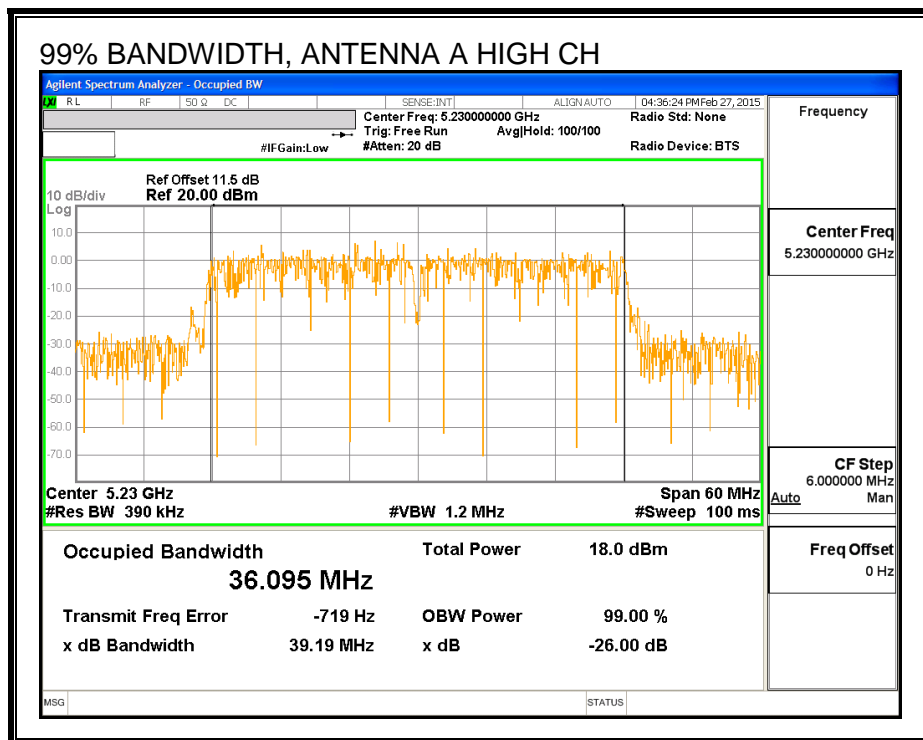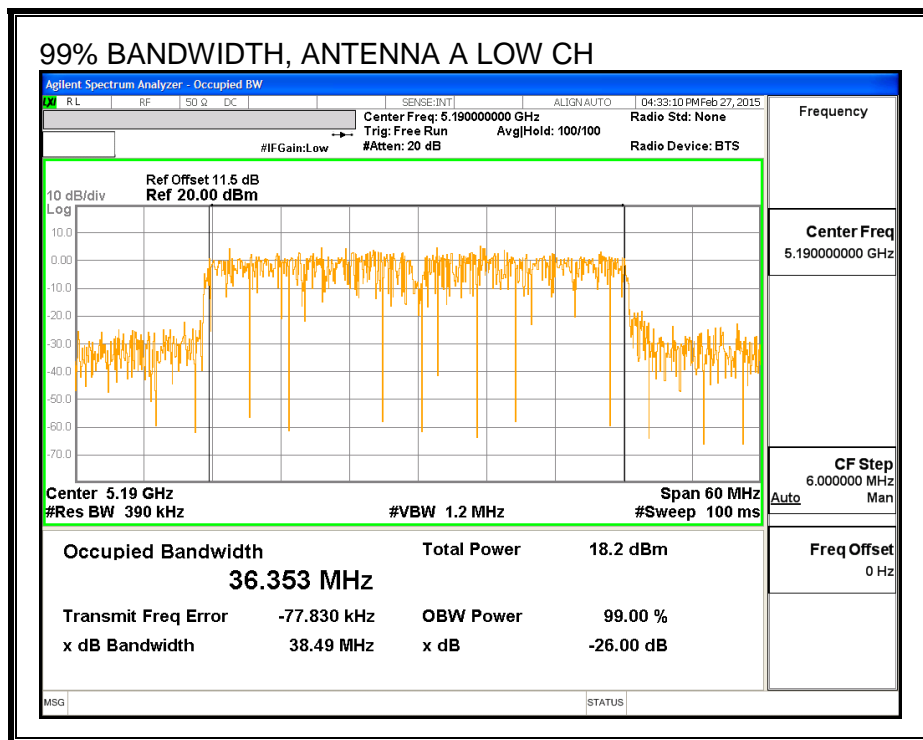

---

### 8.7.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5190	12.47	12.45	15.47
High	5230	15.94	15.99	18.98

---

## 8.7.4. OUTPUT POWER AND PSD

### LIMITS

#### FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
4.10	2.10	3.21

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
4.10	2.10	6.17

**RESULTS**

**Output Power Results**



Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	12.47	12.45	15.47	24.00	-8.53
High	5230	15.94	15.99	18.98	24.00	-5.02

**PSD Results**

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-2.75	-1.60	0.88	10.83	-9.95
High	5230	1.67	1.68	4.68	10.83	-6.15



**PSD, ANTENNA A**

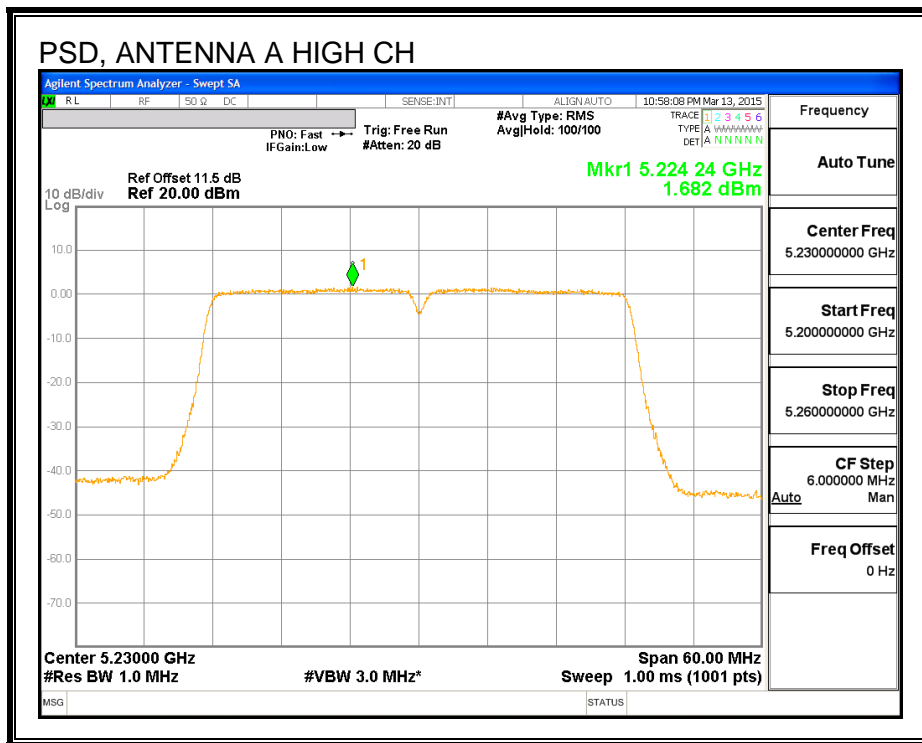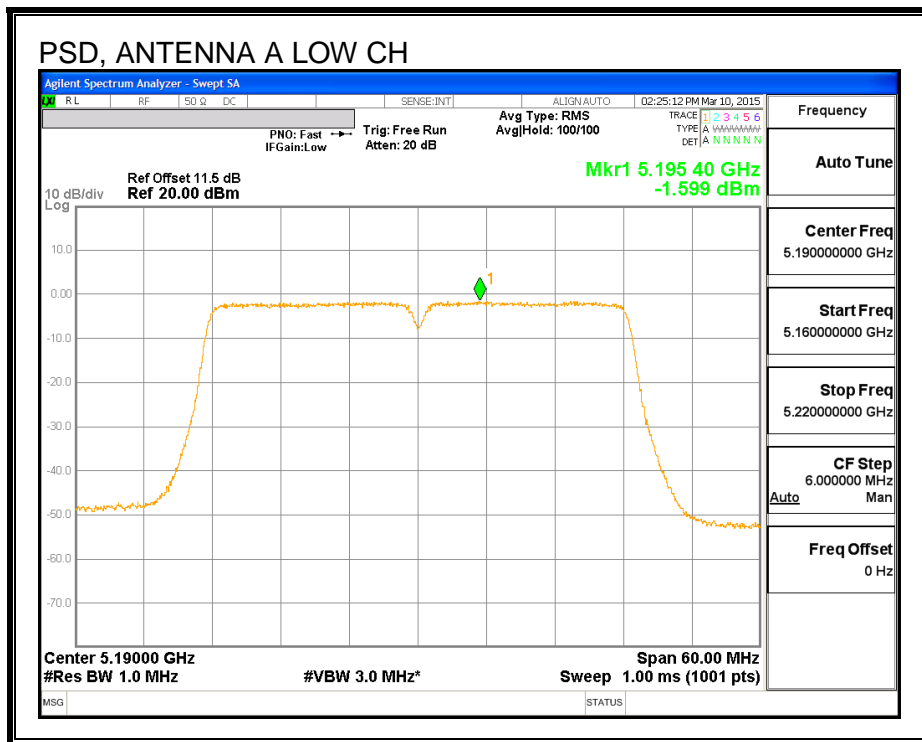

---

## 8.8. 802.11n HT40 2Tx STBC MODE IN THE 5.2 GHz BAND

### 8.8.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.



#### RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5190	40.44	39.96
High	5230	40.14	39.84

**26 dB BANDWIDTH, ANTENNA B**

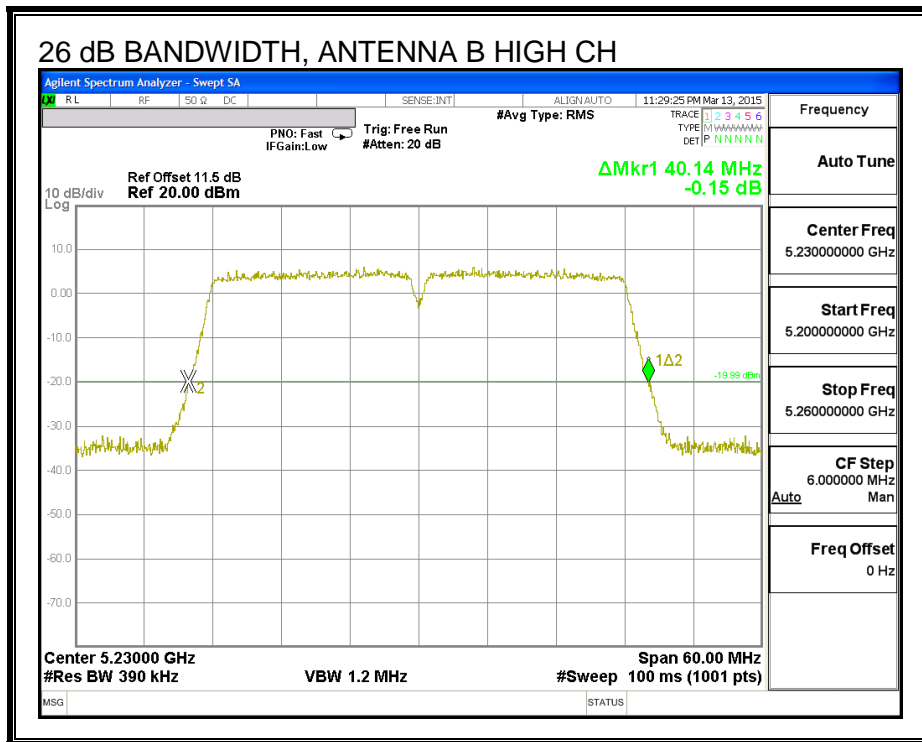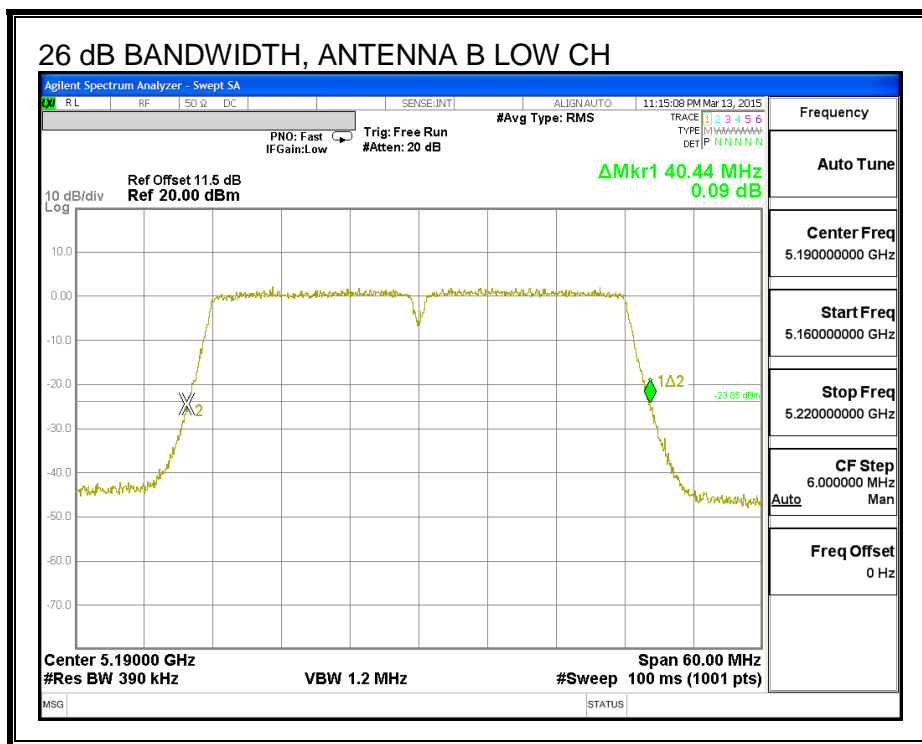

**26 dB BANDWIDTH, ANTENNA A**

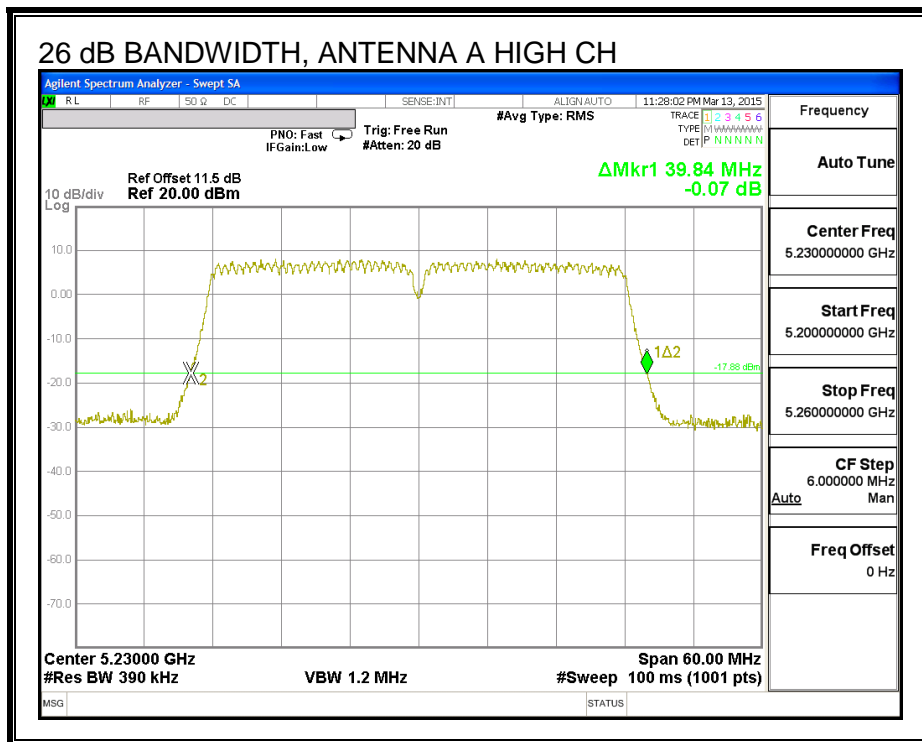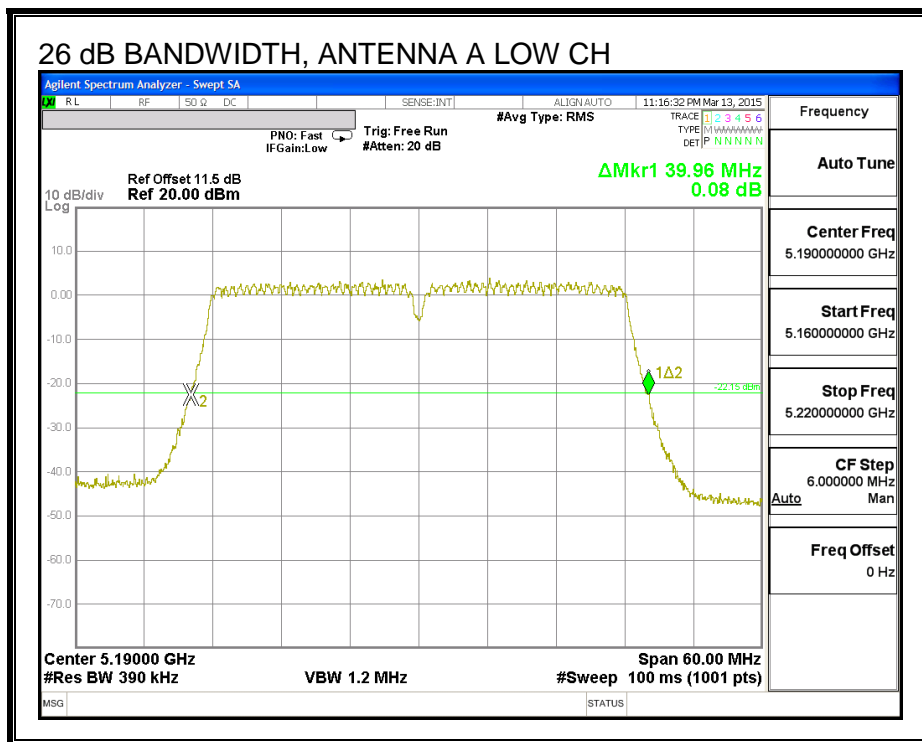

---

### 8.8.2. 99% BANDWIDTH

#### LIMITS



None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5190	36.063	36.233
High	5230	36.326	36.031



**99% BANDWIDTH, ANTENNA B**

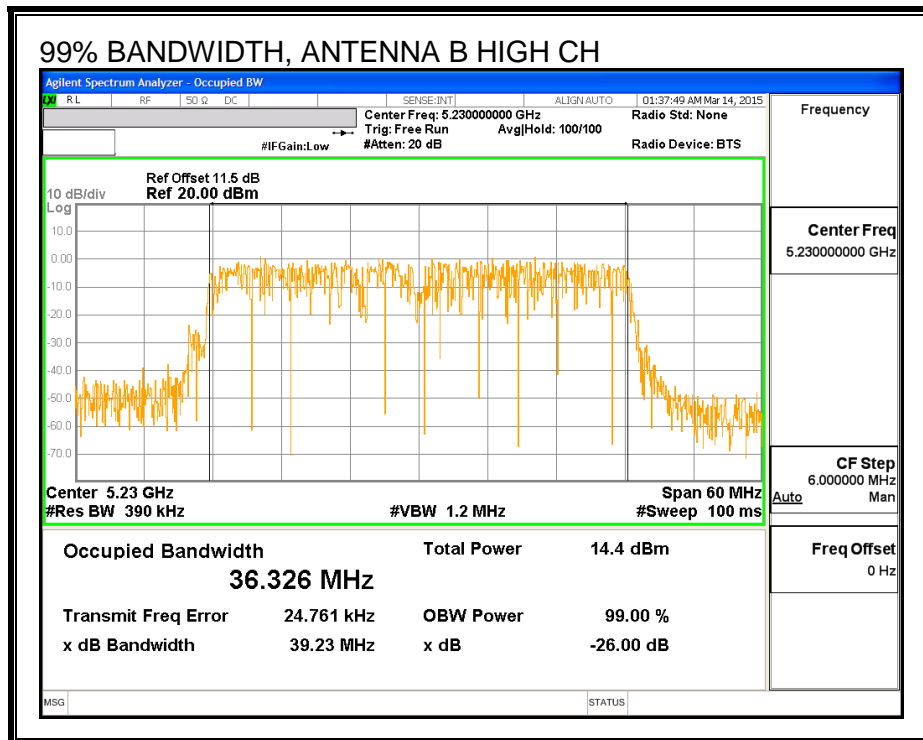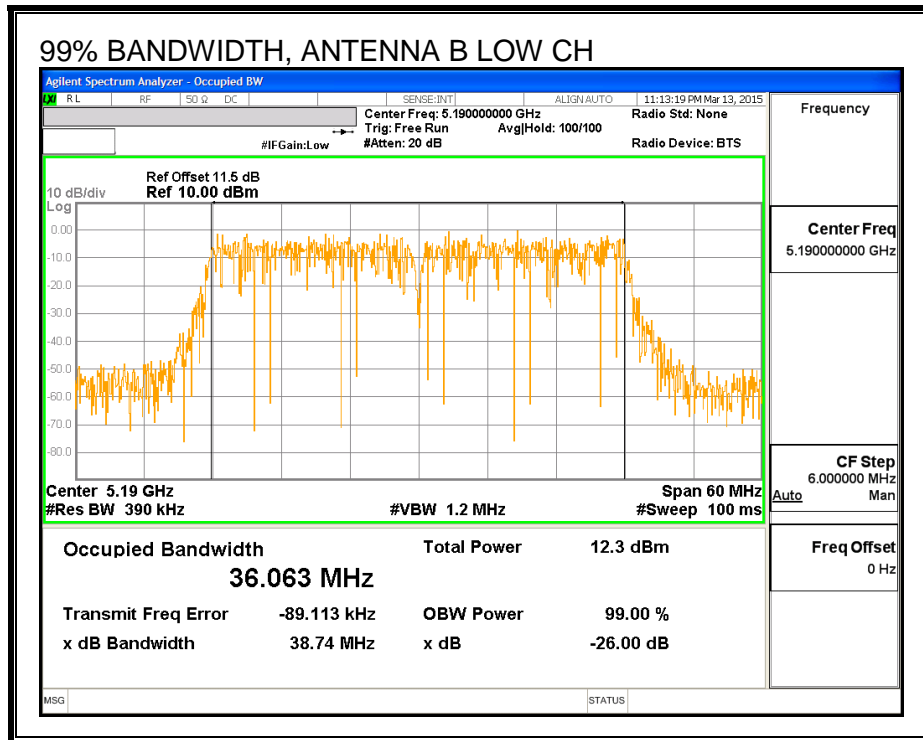

**99% BANDWIDTH, ANTENNA A**

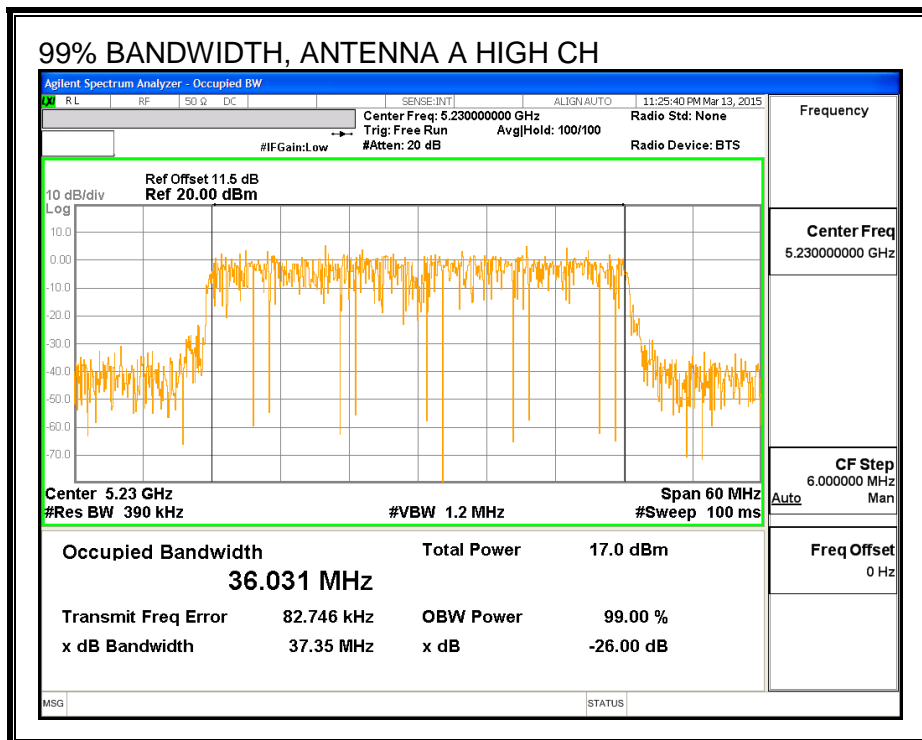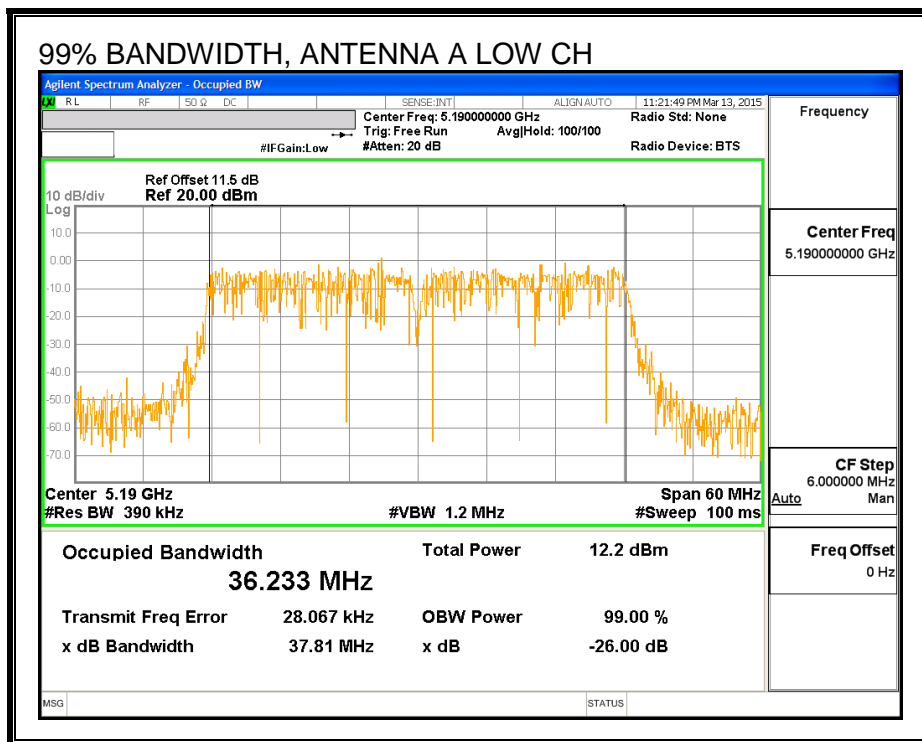

---

### 8.8.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5190	12.50	12.48	15.50
High	5230	16.43	17.00	19.73

---

## 8.8.4. OUTPUT POWER AND PSD

### LIMITS

#### FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

---

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
4.10	2.10	3.21

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	3.21	3.21	24.00	11.00
High	5230	3.21	3.21	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	12.50	12.48	15.50	24.00	-8.50
High	5230	16.43	17.00	19.73	24.00	-4.27



**PSD Results**

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-1.75	-1.86	1.21	11.00	-9.79
High	5230	2.09	2.83	5.49	11.00	-5.51

**PSD, ANTENNA B**

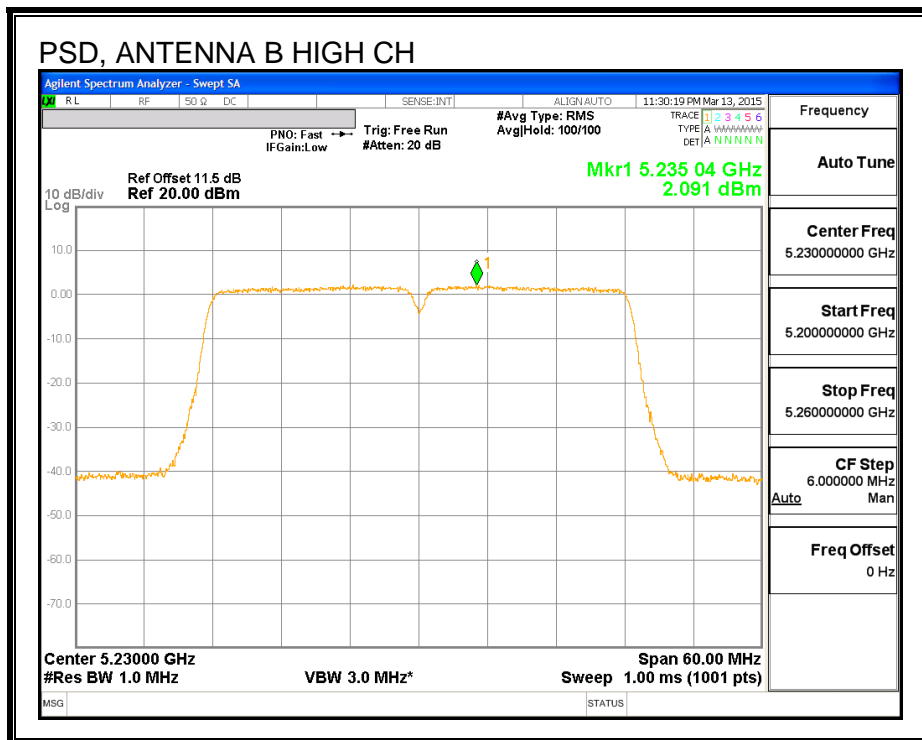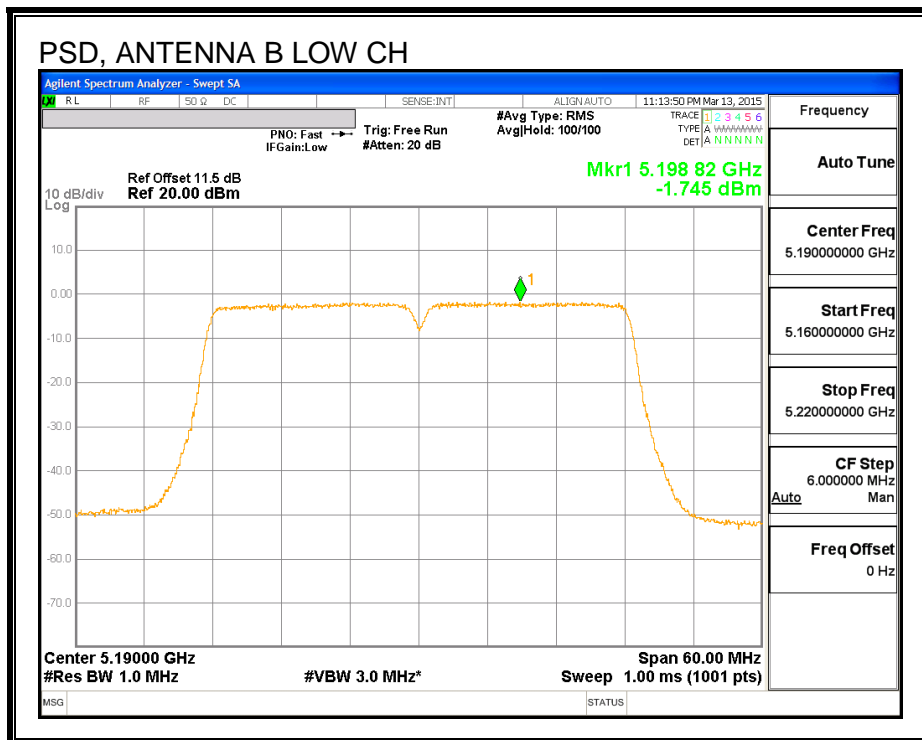

**PSD, ANTENNA A**

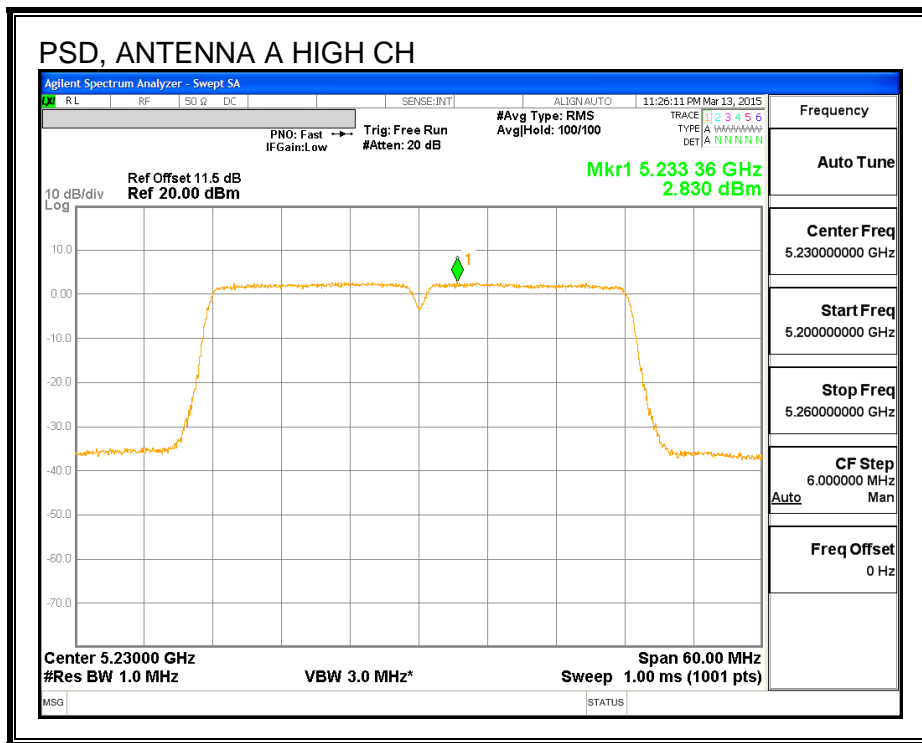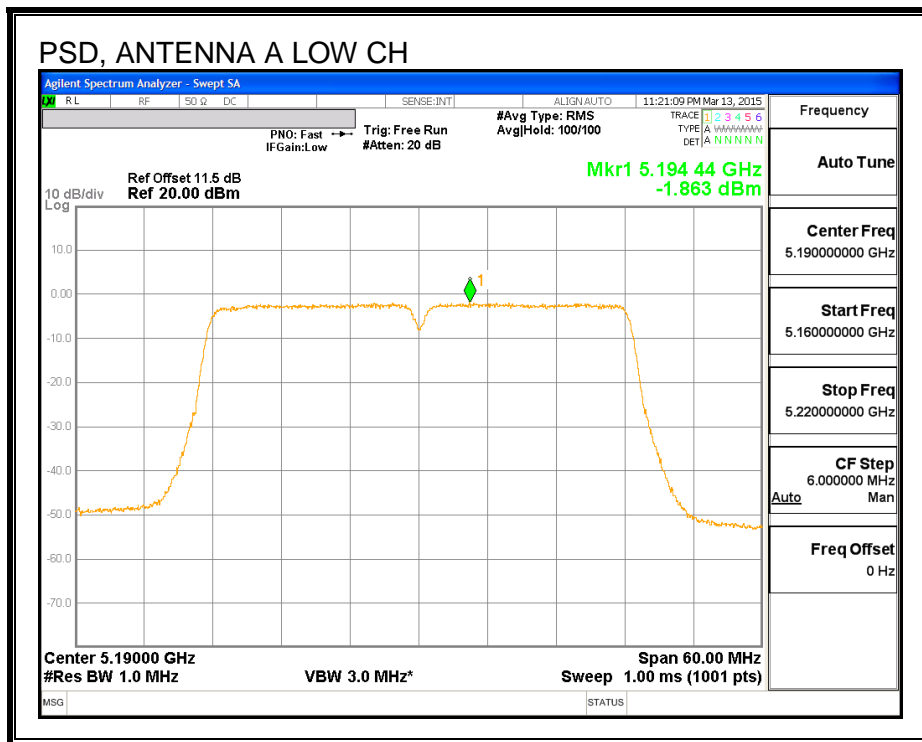



---

**8.9. 802.11ac VHT80 SISO MODE IN THE 5.2 GHz BAND ANTENNA B**

**8.9.1. 26 dB BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	81.96

**26 dB BANDWIDTH**

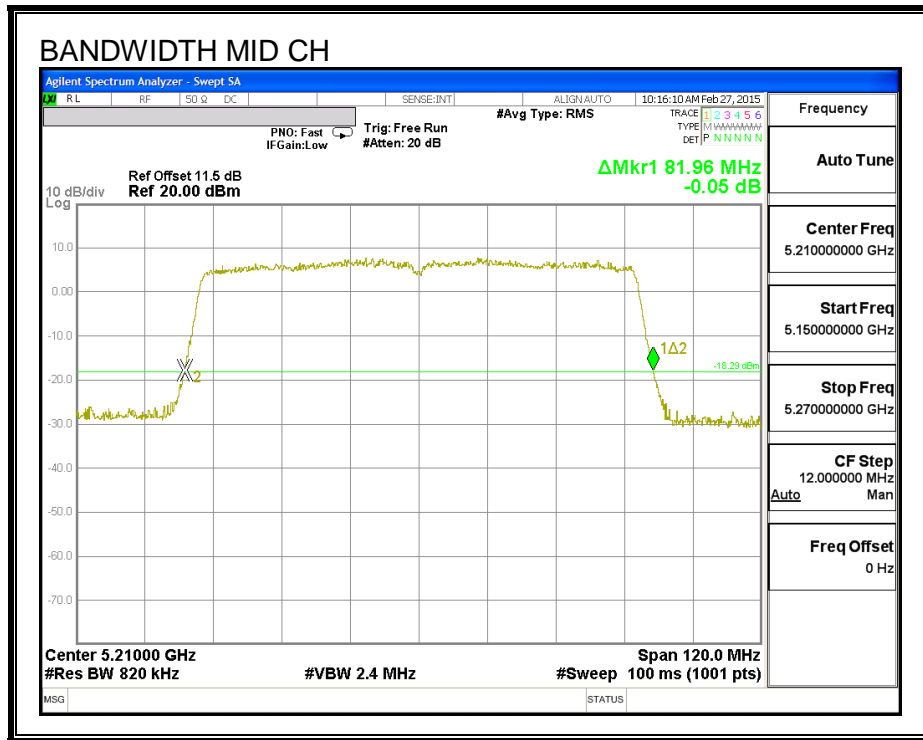

### 8.9.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.694

**99% BANDWIDTH**

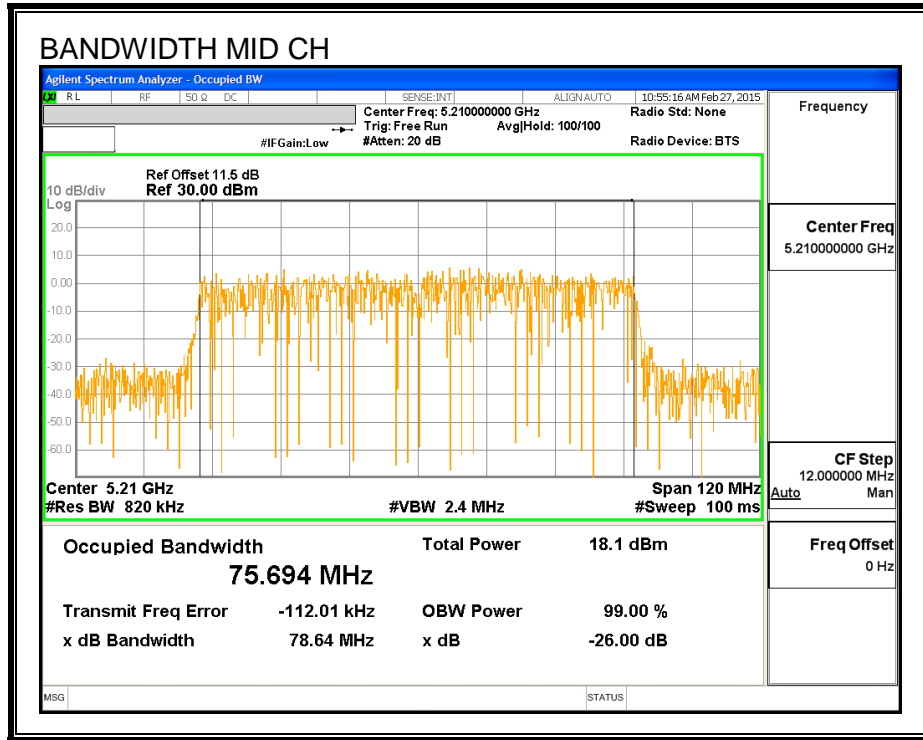

### 8.9.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	13.01

---

## 8.9.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

### RESULTS

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	4.10	4.10	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.16	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	13.01	13.17	24.00	-10.83

**PSD Results**

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-4.04	-3.88	11.00	-14.88

**PSD, ANTENNA B**

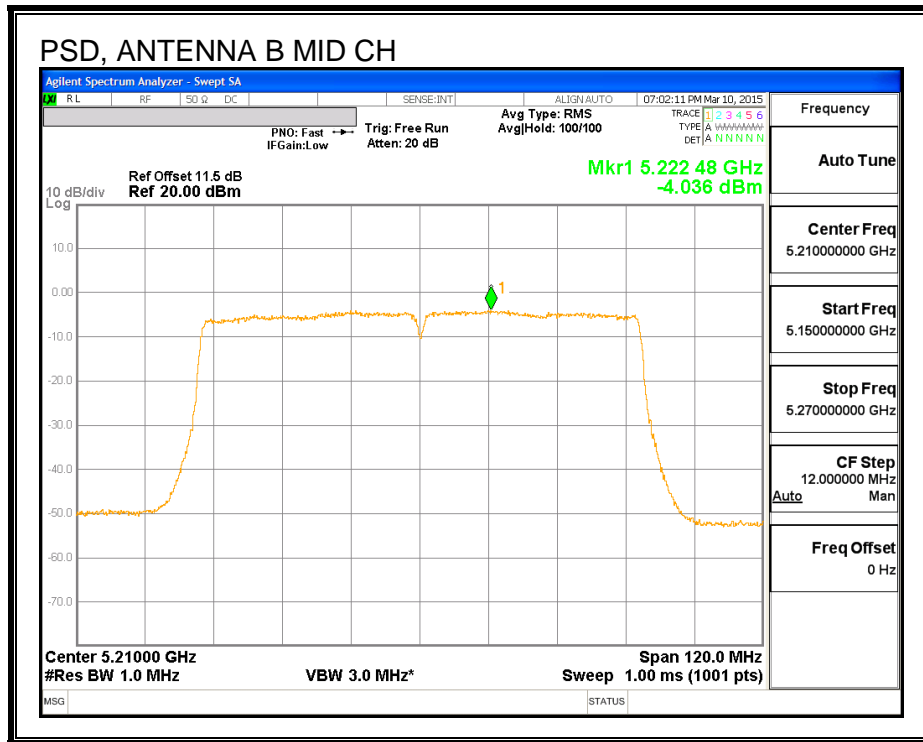



---

**8.10. 802.11ac VHT80 SISO MODE IN THE 5.2 GHz BAND ANTENNA A**

**8.10.1. 26 dB BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.20

**26 dB BANDWIDTH**

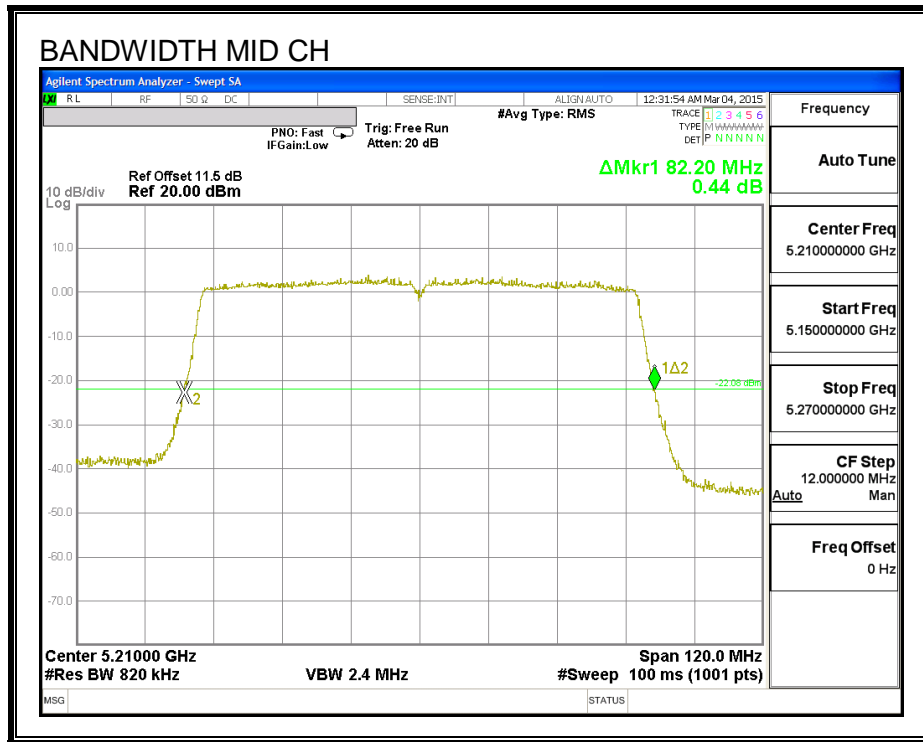

**8.10.2. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.643

**99% BANDWIDTH**

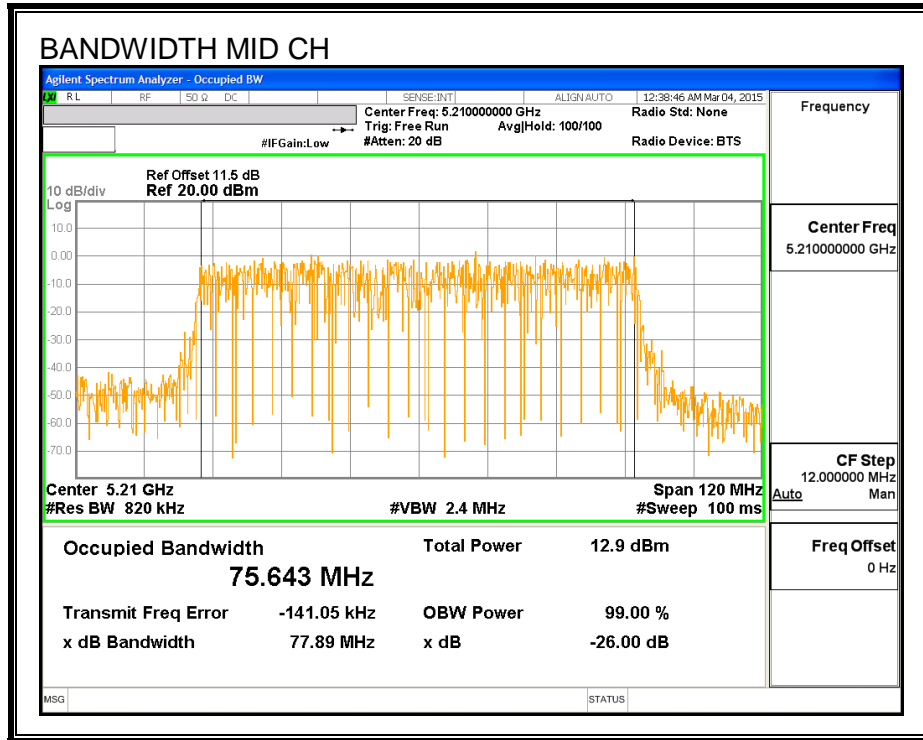

### 8.10.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	13.01

---

## 8.10.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

### RESULTS

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	2.10	2.10	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.16	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	13.01	13.17	24.00	-10.83

**PSD Results**

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-3.96	-3.80	11.00	-14.80

**PSD, ANTENNA A**

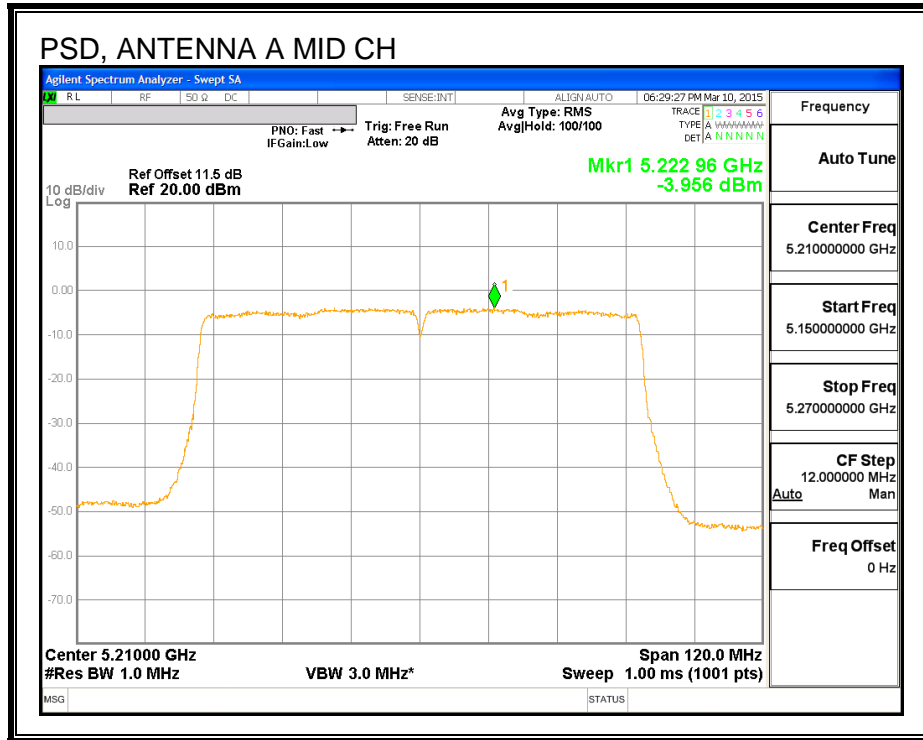



---

## 8.11. 802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND

### 8.11.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Mid	5210	81.96	81.60

**26 dB BANDWIDTH, ANTENNA B**

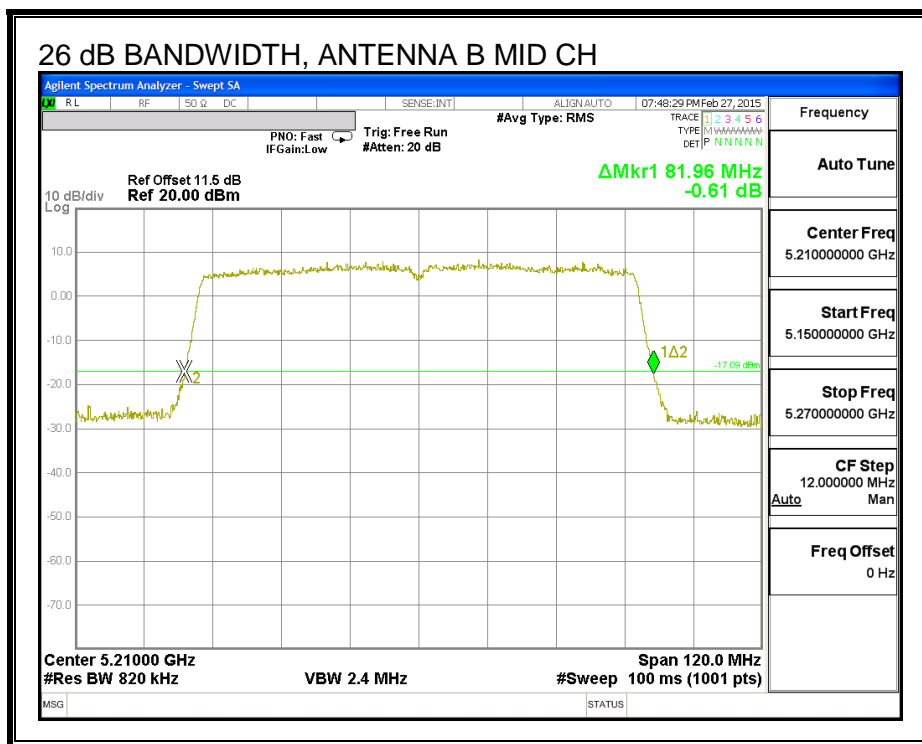

**26 dB BANDWIDTH, ANTENNA A**

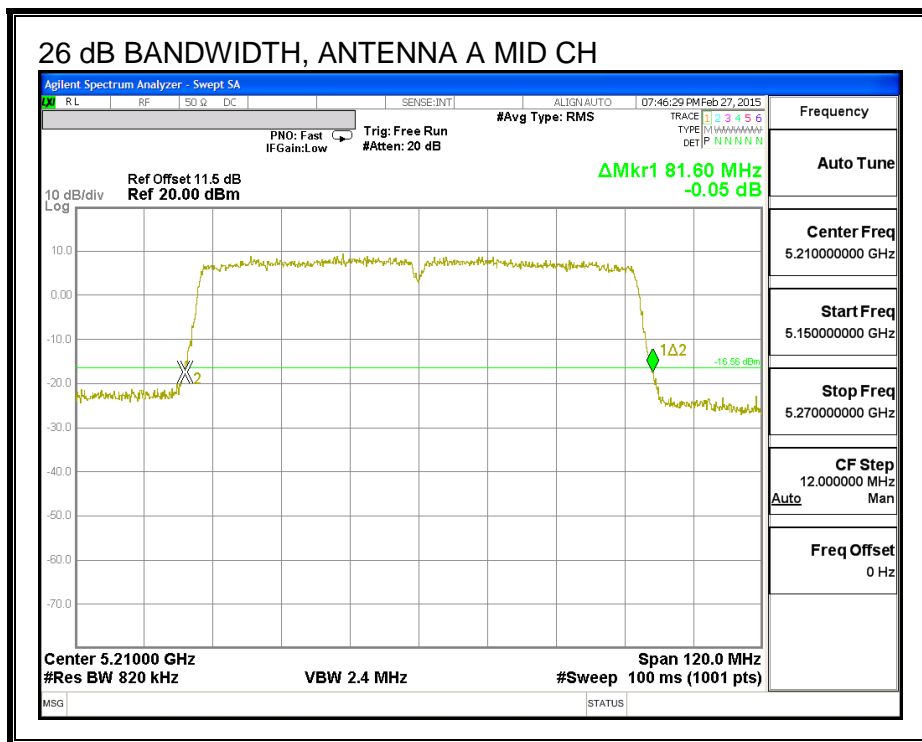

---

**8.11.2. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.


**RESULTS**

Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Mid	5210	75.892	75.737

**99% BANDWIDTH, ANTENNA B**

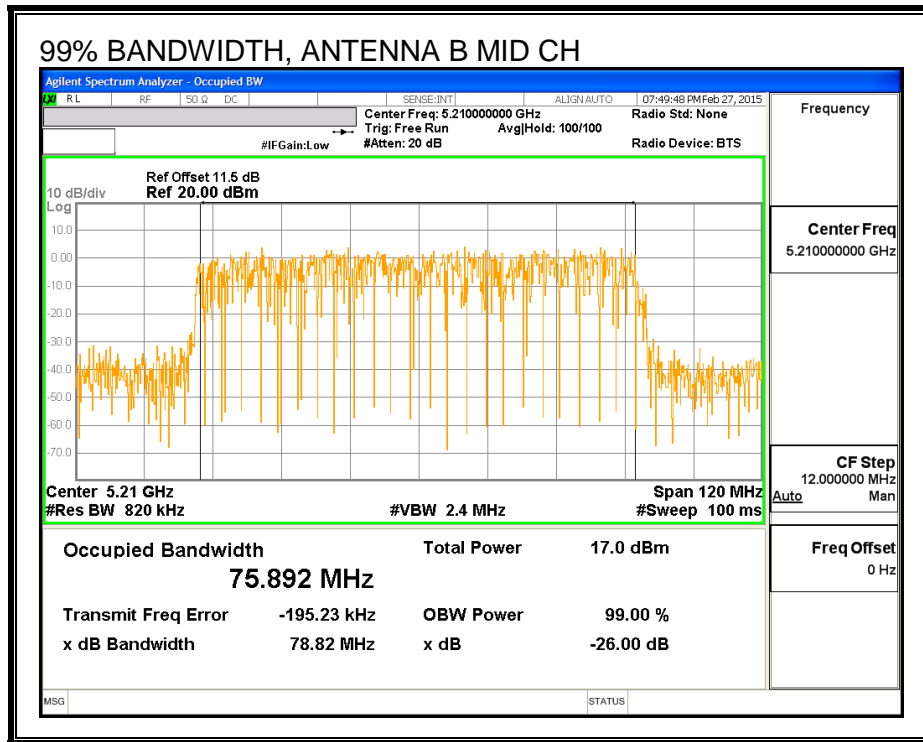

**99% BANDWIDTH, ANTENNA A**

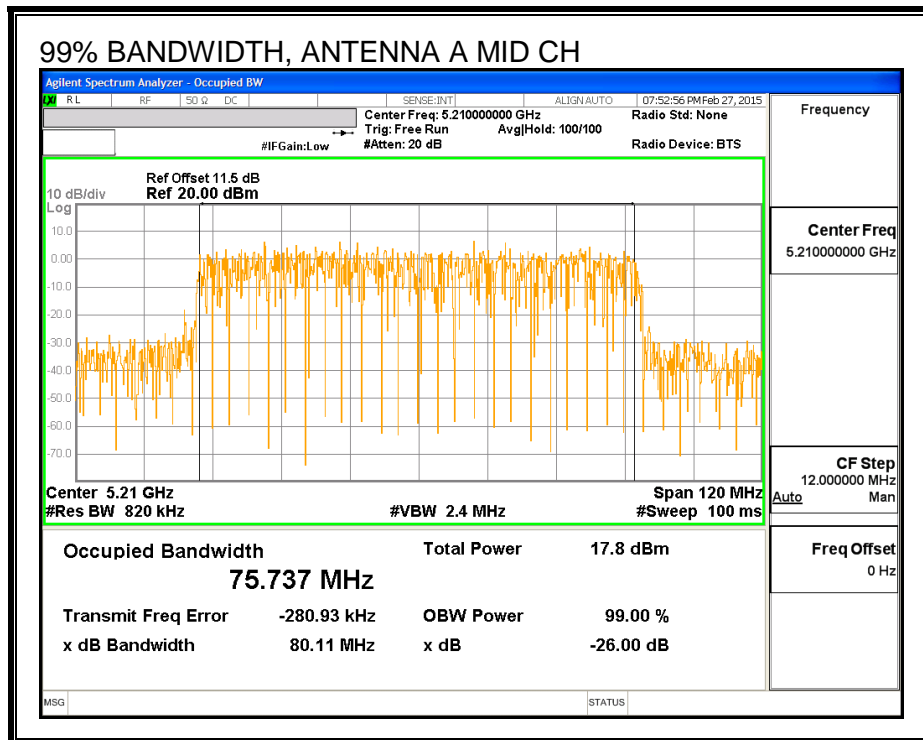

---

### 8.11.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Mid	5210	11.92	12.02	14.98

---

#### 8.11.4. OUTPUT POWER AND PSD

##### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
4.10	2.10	3.21

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
4.10	2.10	6.17

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	3.21	6.17	24.00	10.83

<b>Duty Cycle CF (dB)</b>	0.21	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.92	12.02	15.19	24.00	-8.81

**PSD Results**


Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-5.08	-4.90	-1.77	10.83	-12.60



**PSD, ANTENNA B**

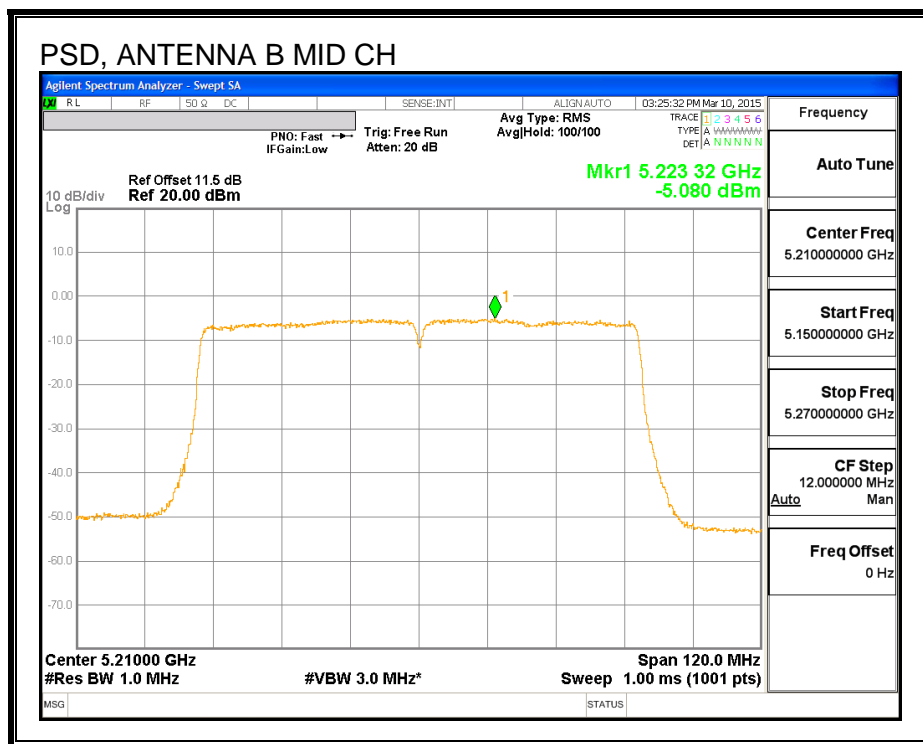

**PSD, ANTENNA A**

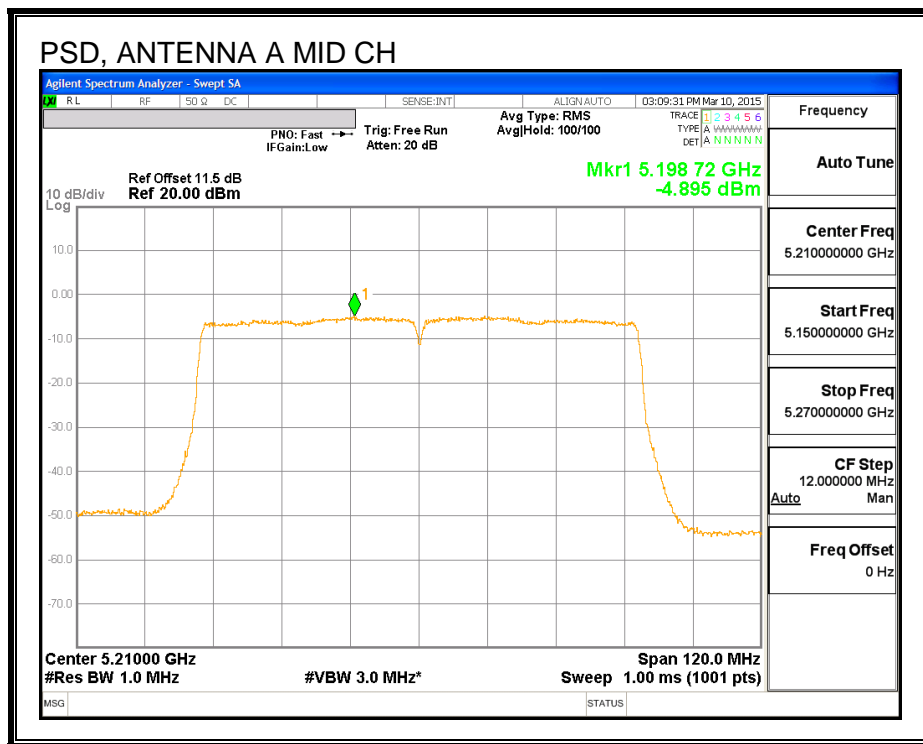

## 8.12. 802.11n HT20 SISO MODE IN THE 5.3 GHz BAND ANTENNA B

### 8.12.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.02
Mid	5300	21.93
High	5320	21.93

**26 dB BANDWIDTH**

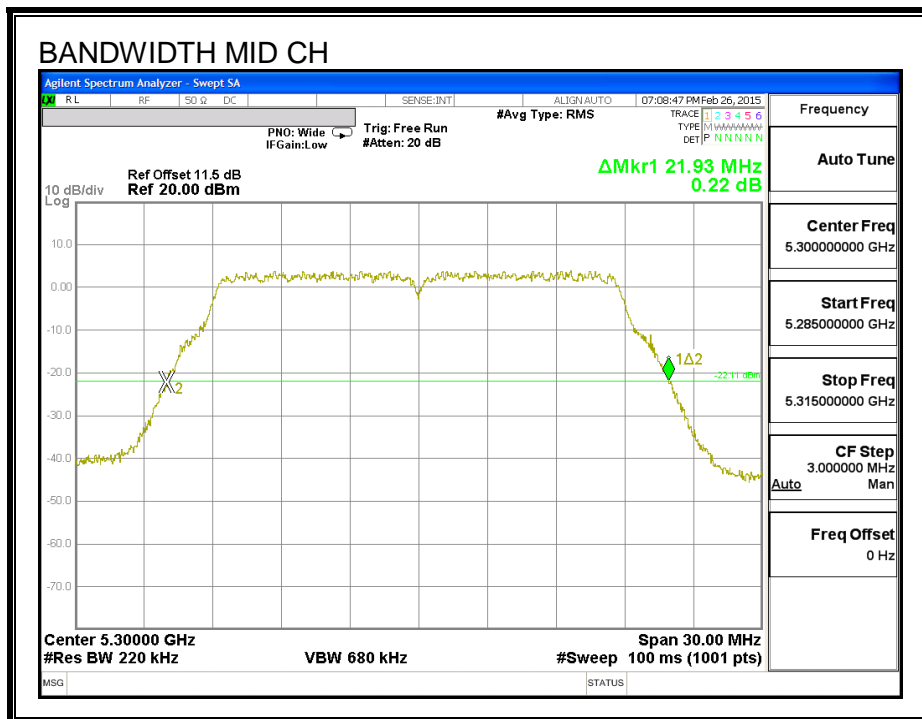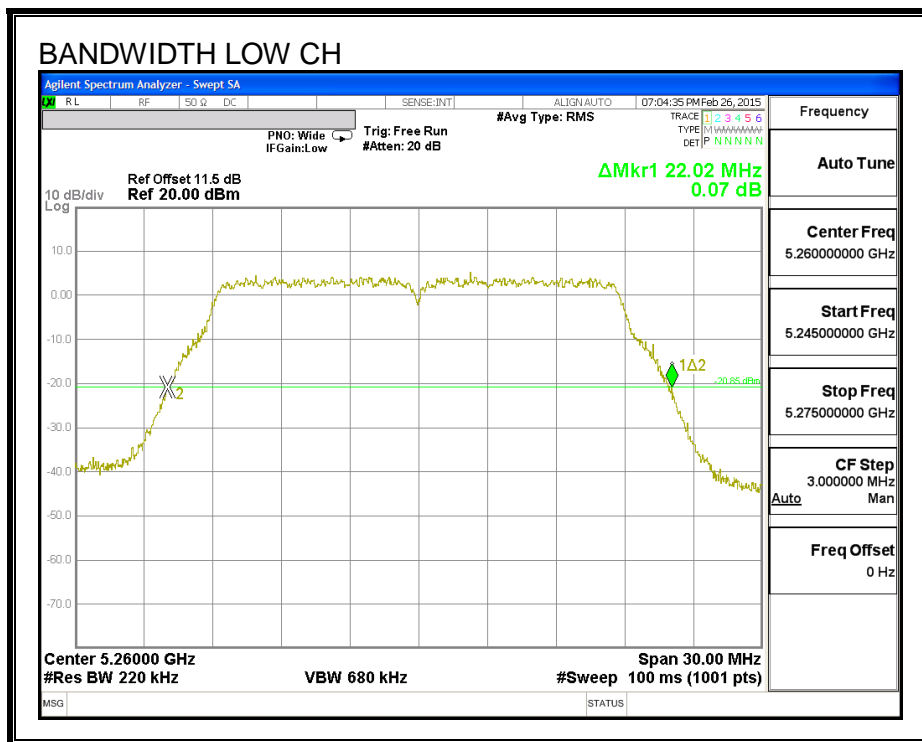



**8.12.2. 99% BANDWIDTH**



**LIMITS**


None; for reporting purposes only.

**RESULTS**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.7560
Mid	5300	17.7240
High	5320	17.7240

**99% BANDWIDTH**

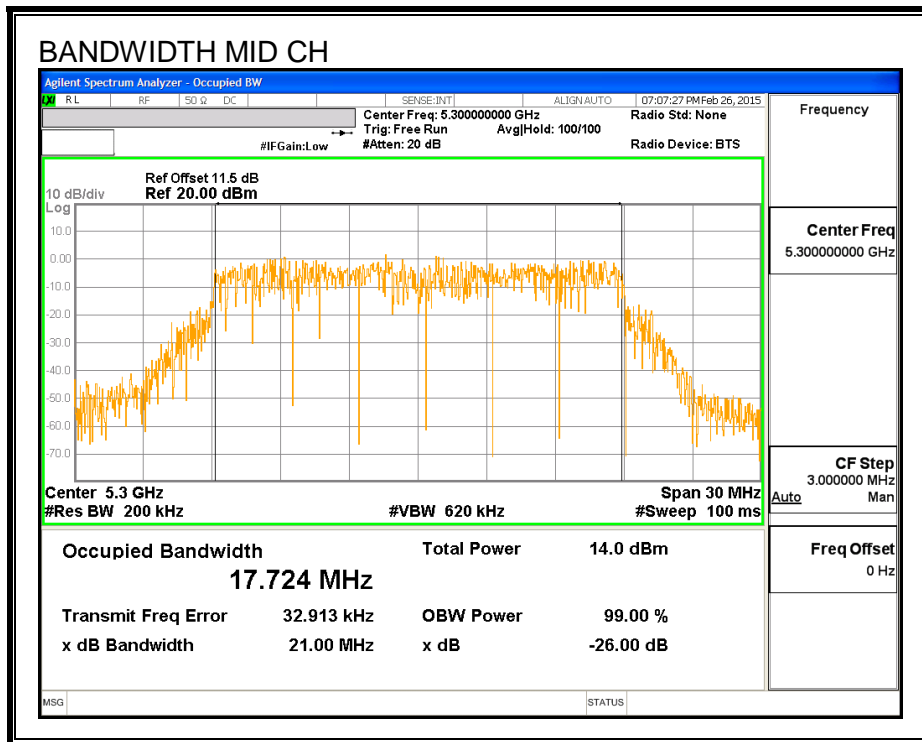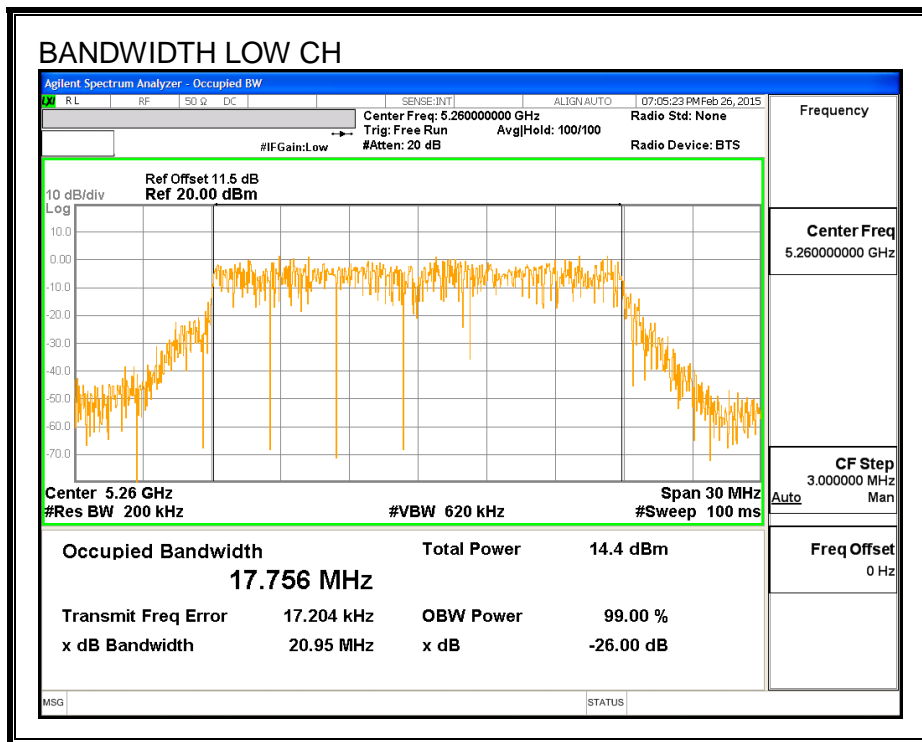

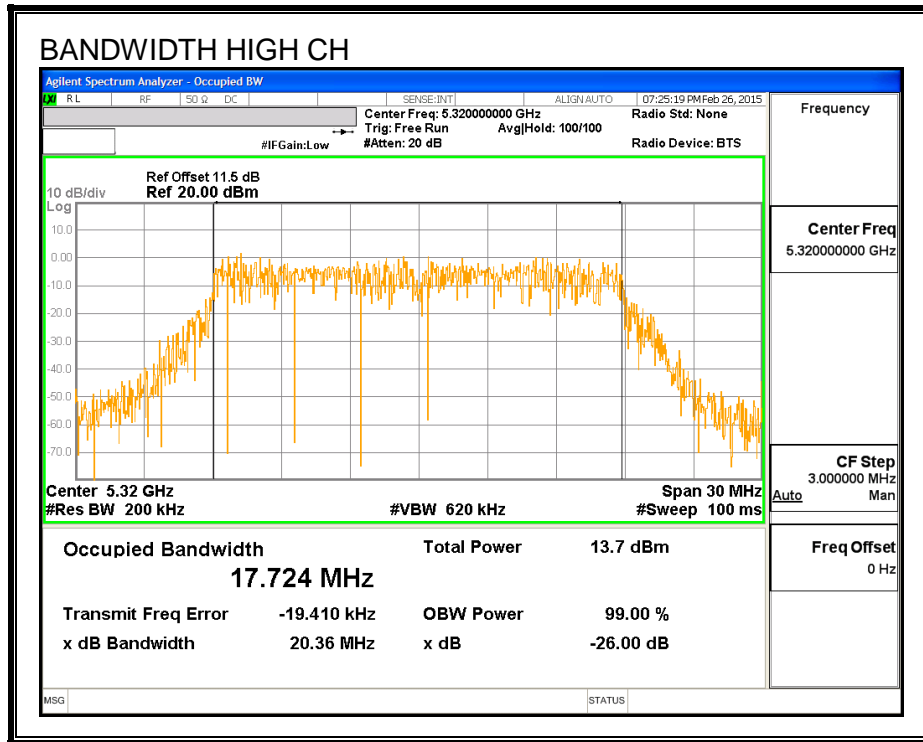

---

**8.12.3. AVERAGE POWER**

**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency (MHz)	Power (dBm)
Low	5260	15.42
Mid	5300	15.53
High	5320	15.40



---

#### **8.12.4. OUTPUT POWER AND PSD**

##### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.02	4.20	24.00	11.00
Mid	5300	21.93	4.20	24.00	11.00
High	5320	21.93	4.20	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.42	15.42	24.00	-8.58
Mid	5300	15.53	15.53	24.00	-8.47
High	5320	15.40	15.40	24.00	-8.60

**PSD Results**

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	3.96	3.96	11.00	-7.04
Mid	5300	4.03	4.03	11.00	-6.97
High	5320	3.96	3.96	11.00	-7.04

**PSD, ANTENNA B**

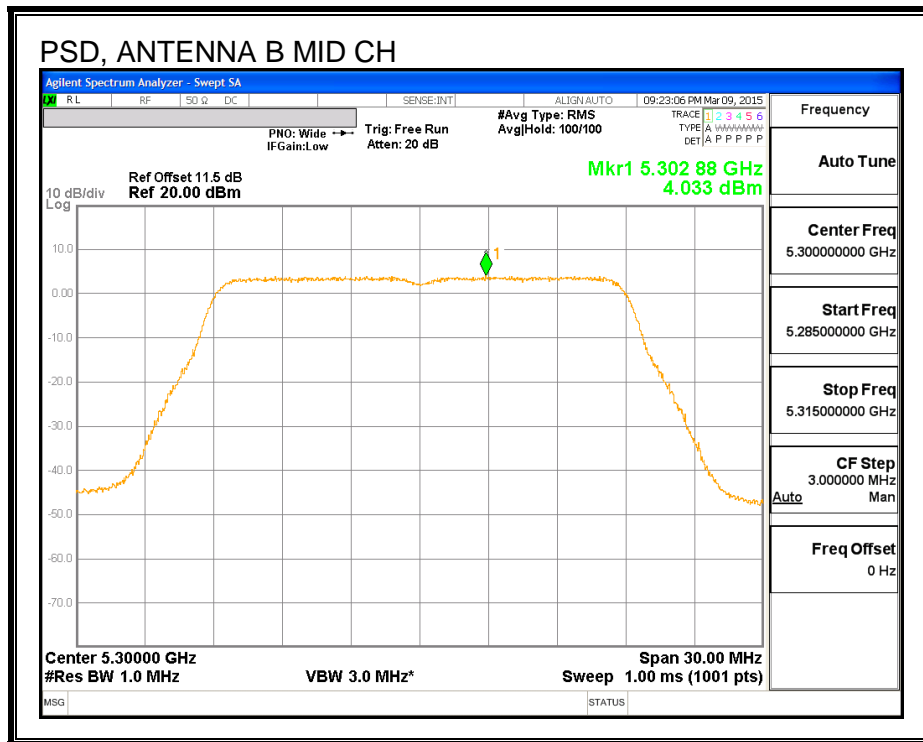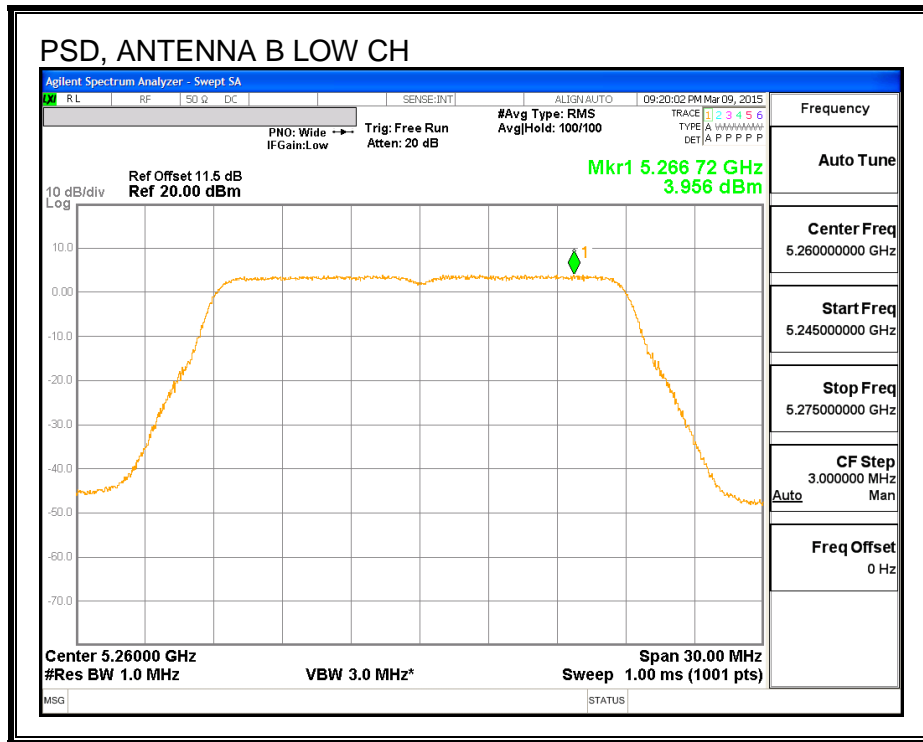

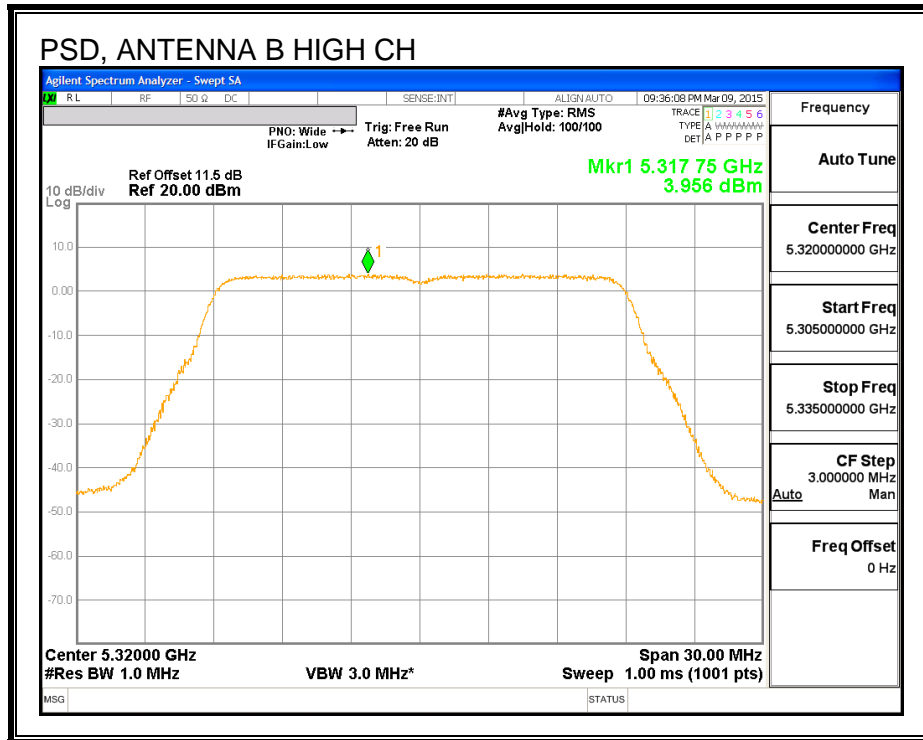

---

### 8.13. 802.11n HT20 SISO MODE IN THE 5.3 GHz BAND ANTENNA A

#### 8.13.1. 26 dB BANDWIDTH



##### LIMITS


None; for reporting purposes only.

##### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.02
Mid	5300	21.99
High	5320	22.05

**26 dB BANDWIDTH**

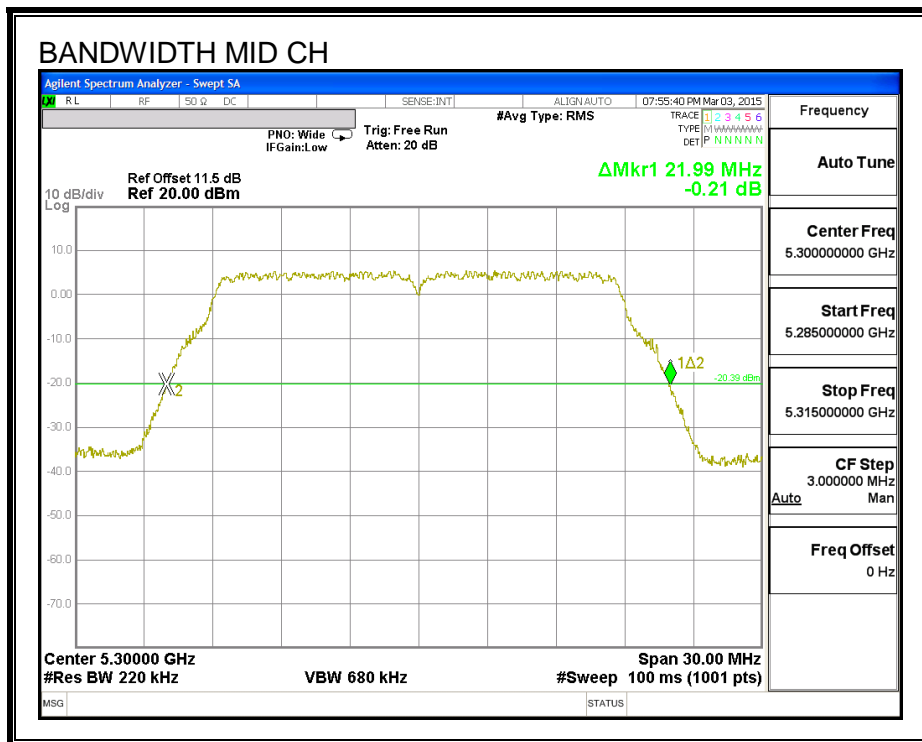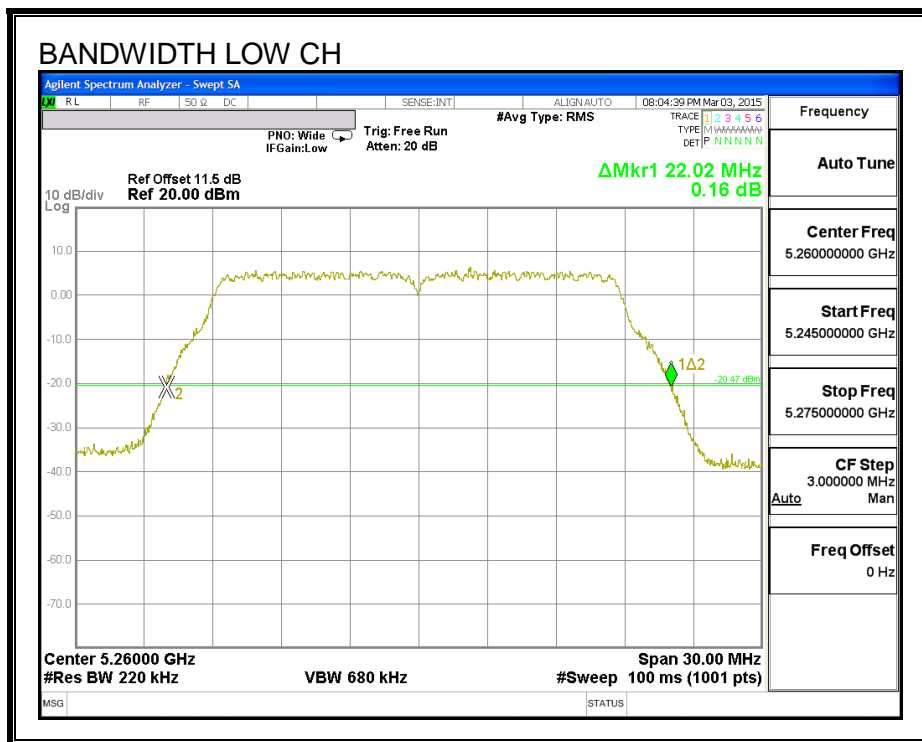

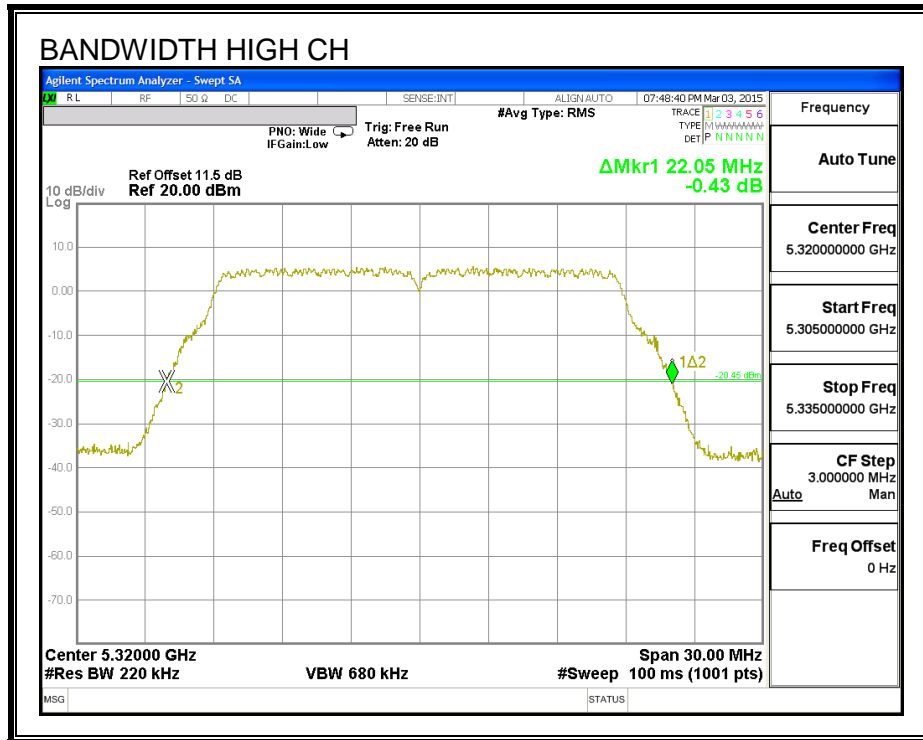

**8.13.2. 99% BANDWIDTH**

**LIMITS**



None; for reporting purposes only.


**RESULTS**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.755
Mid	5300	17.761
High	5320	17.661



**99% BANDWIDTH**

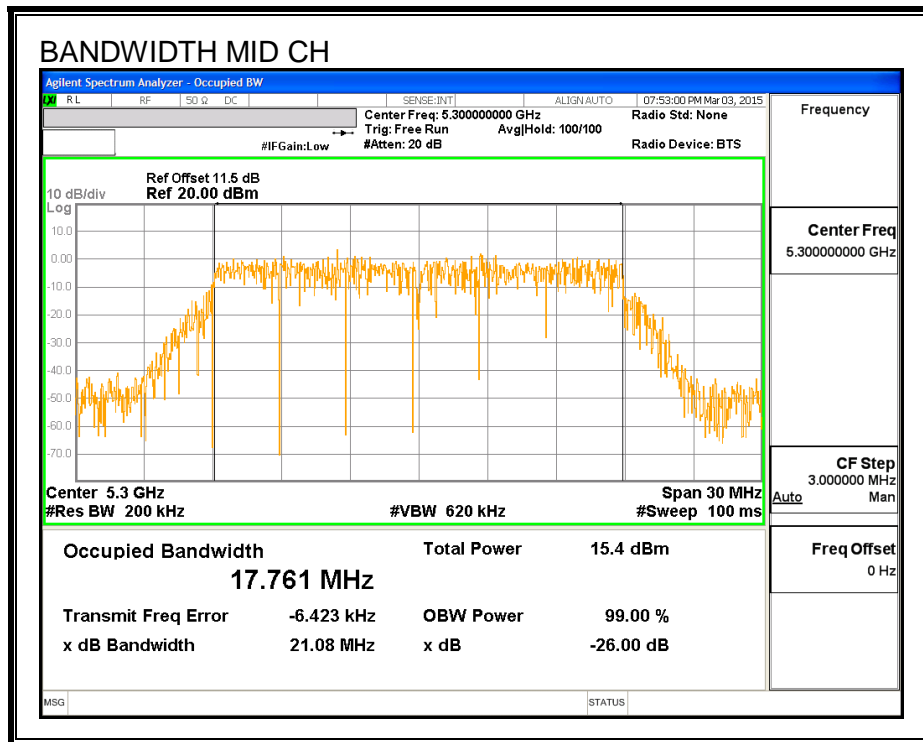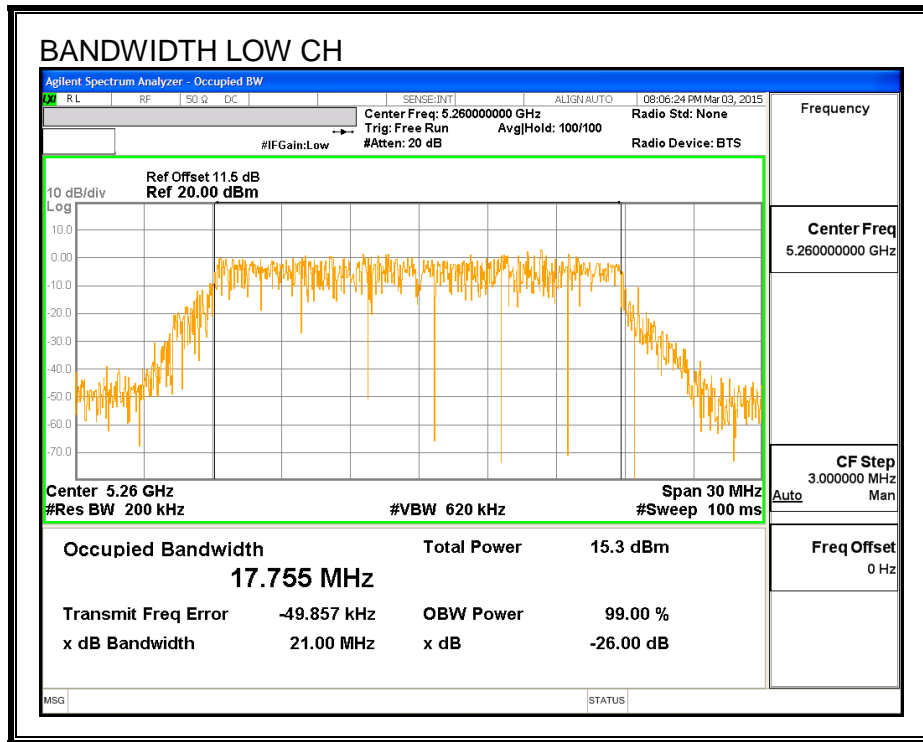

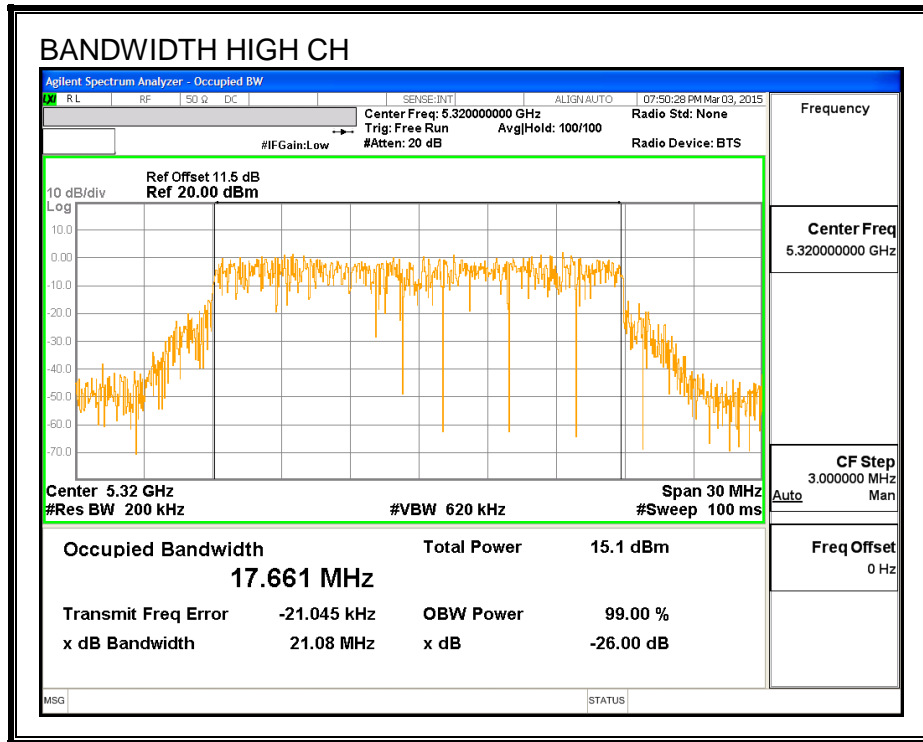

---

### 8.13.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	15.98
Mid	5300	16.09
High	5320	15.92

#### **8.13.4. OUTPUT POWER AND PSD**

##### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.02	3.10	24.00	11.00
Mid	5300	21.99	3.10	24.00	11.00
High	5320	22.05	3.10	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.98	15.98	24.00	-8.02
Mid	5300	16.09	16.09	24.00	-7.91
High	5320	15.92	15.92	24.00	-8.08

**PSD Results**

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.39	4.39	11.00	-6.61
Mid	5300	4.39	4.39	11.00	-6.61
High	5320	4.23	4.23	11.00	-6.77

**PSD, ANTENNA A**

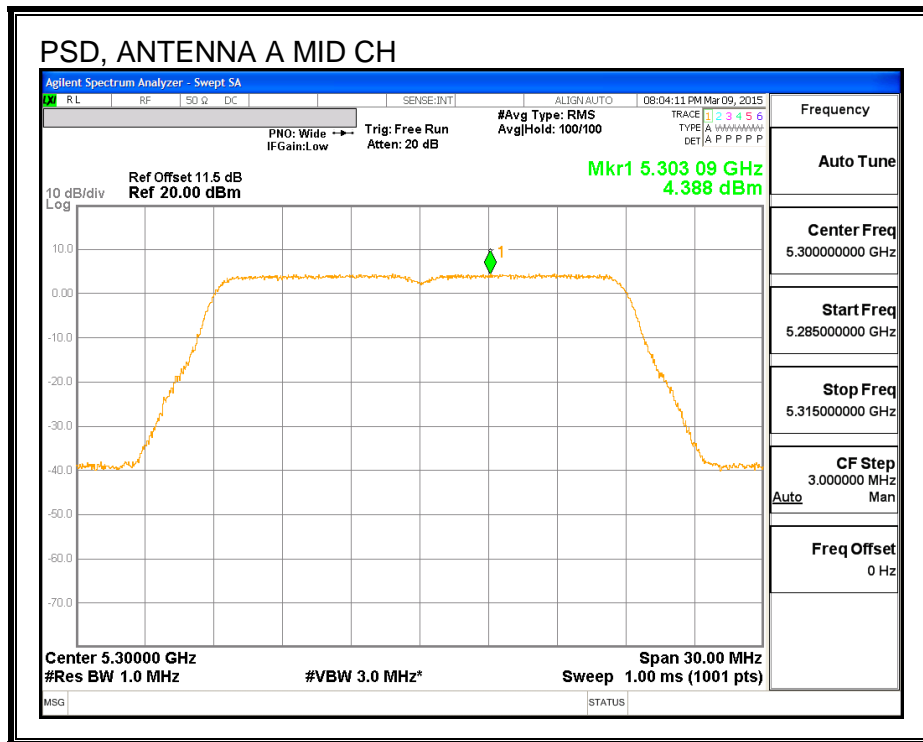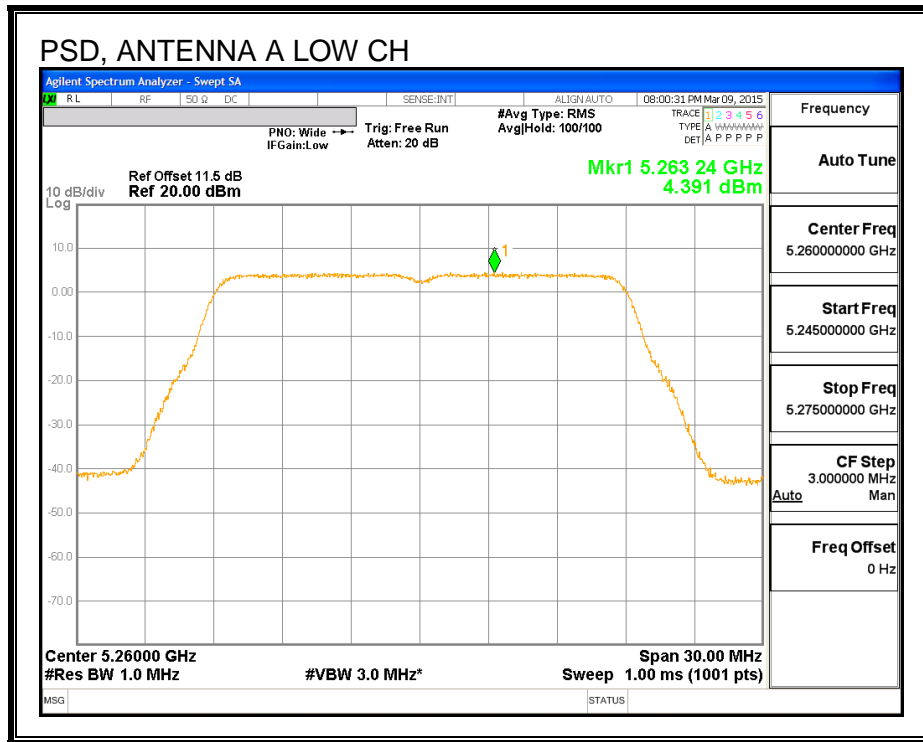

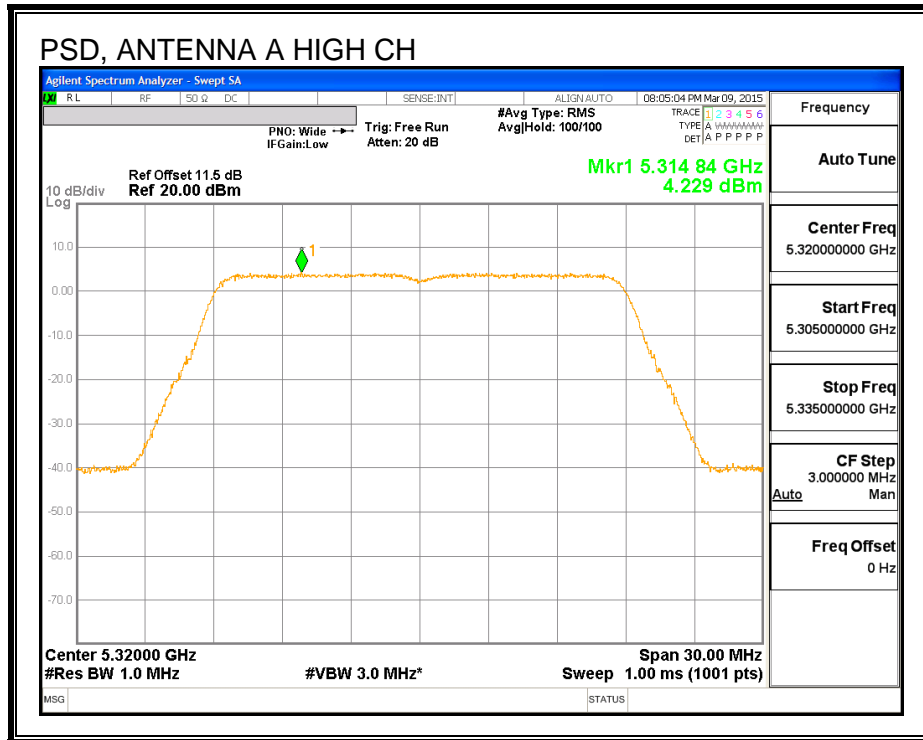

## 8.14. 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND

### 8.14.1. 26 dB BANDWIDTH

#### LIMITS



None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5260	21.75	21.78
Mid	5300	21.87	21.78
High	5320	21.81	21.66






**26 dB BANDWIDTH, ANTENNA B**

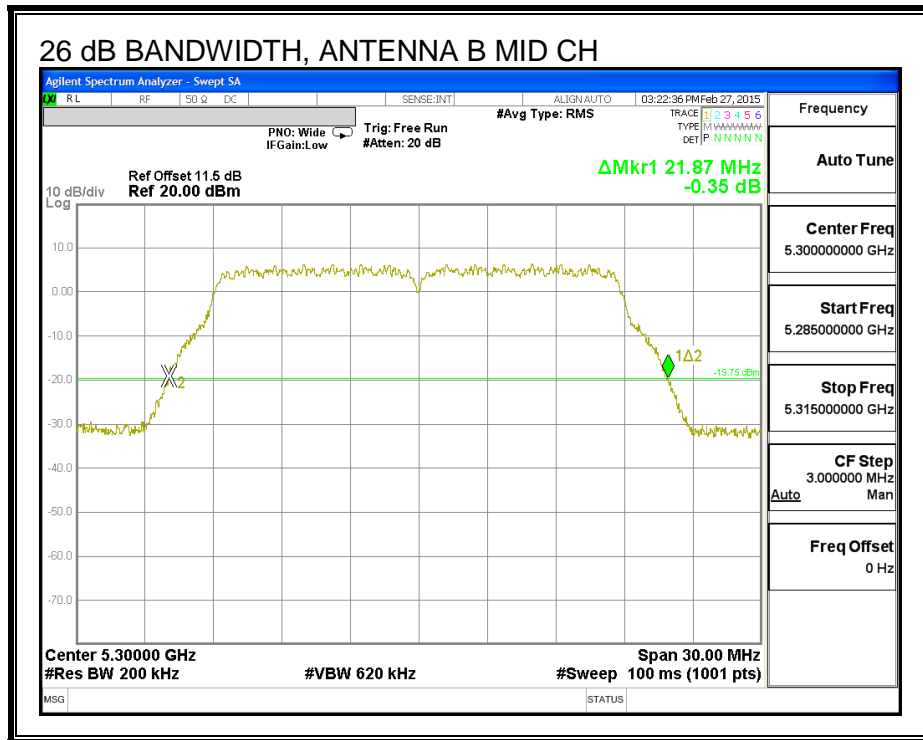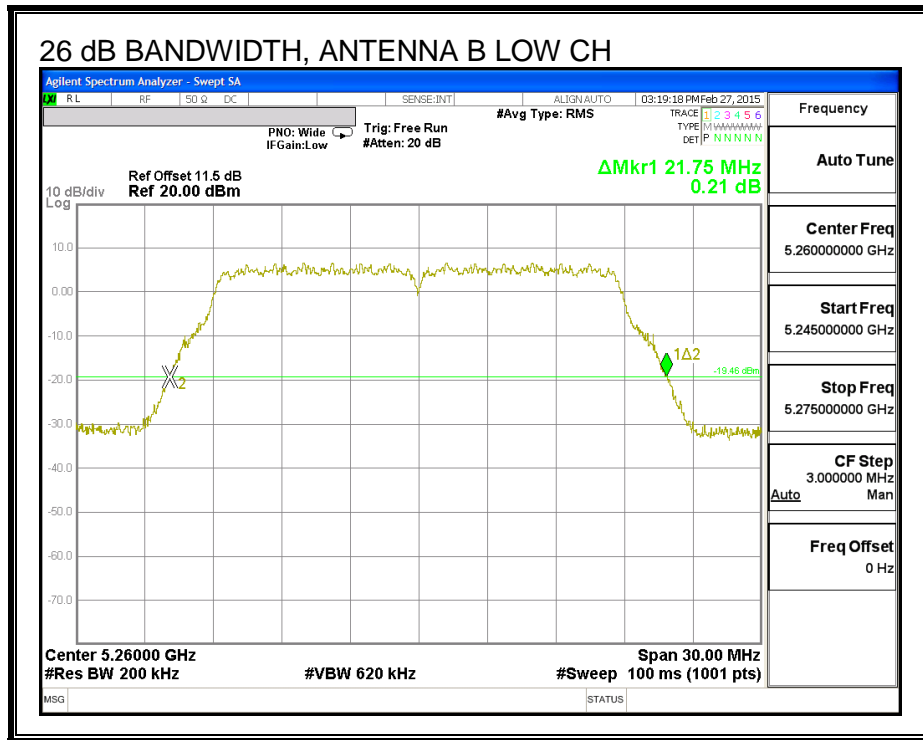

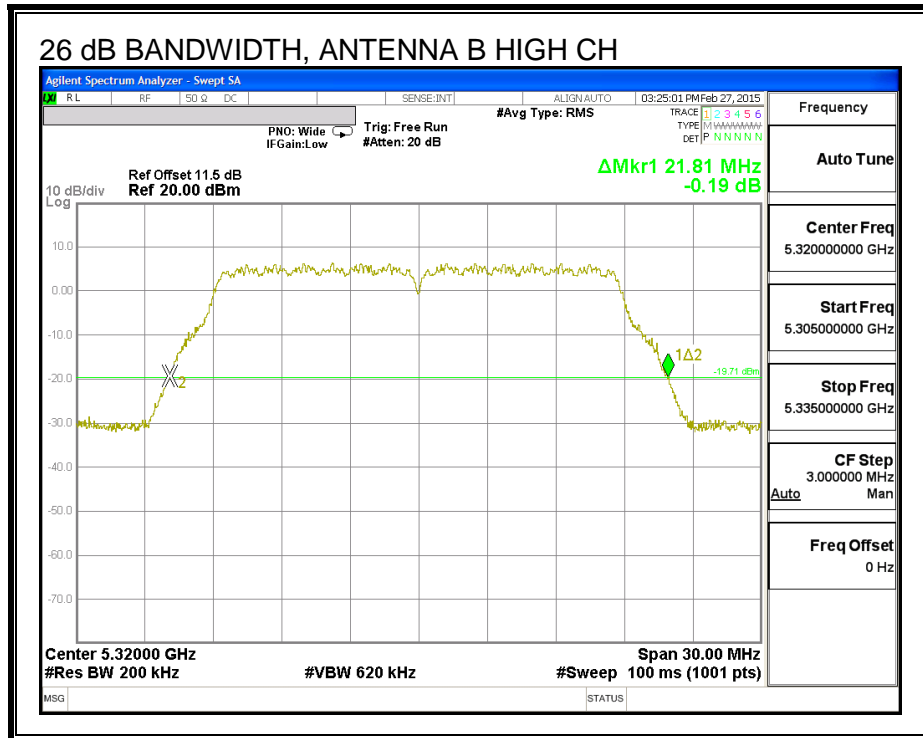

**26 dB BANDWIDTH, ANTENNA A**

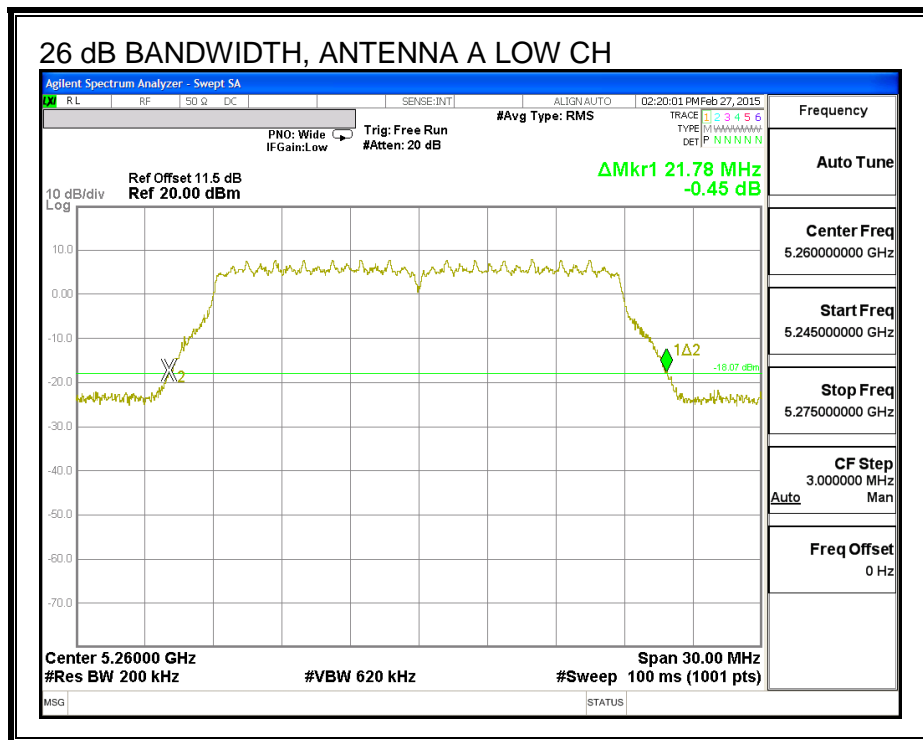

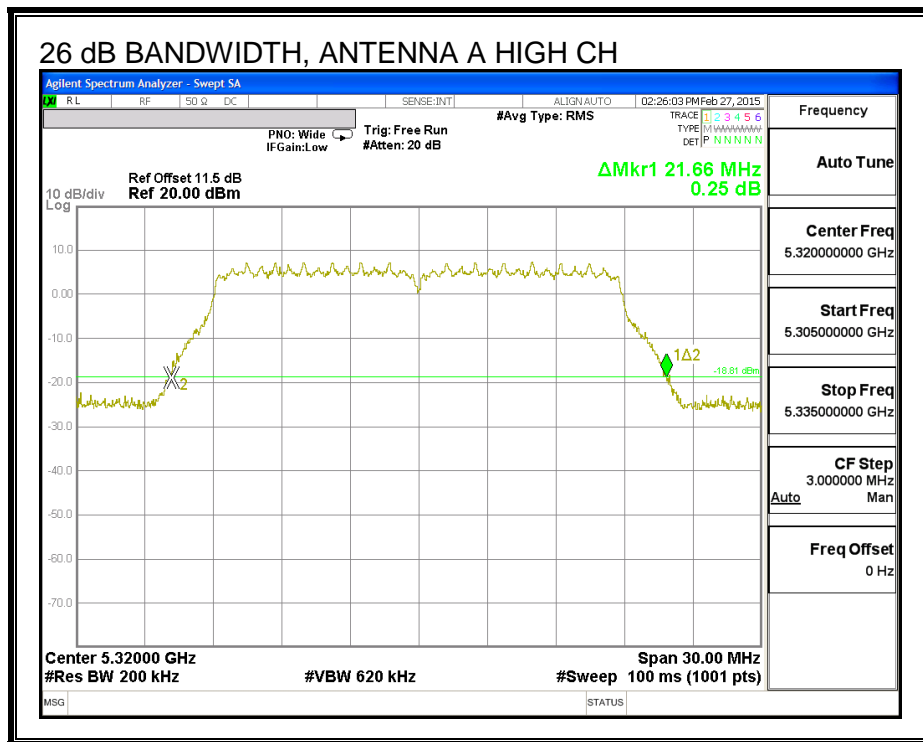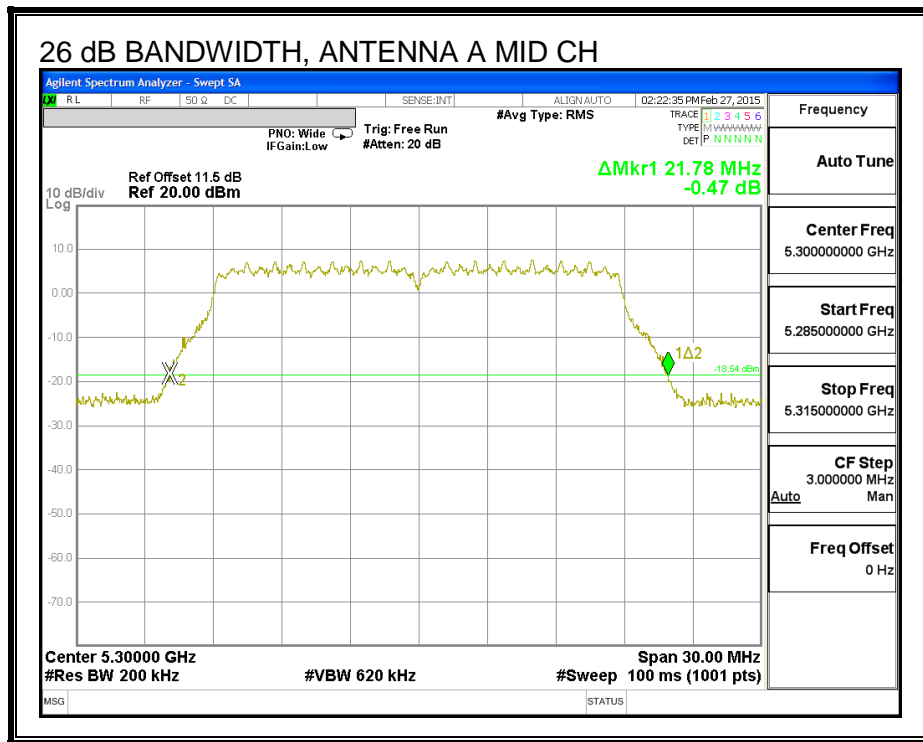

---

**8.14.2. 99% BANDWIDTH**



**LIMITS**


None; for reporting purposes only.

**RESULTS**


Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5260	17.692	17.742
Mid	5300	17.769	17.775
High	5320	17.766	17.804



**99% BANDWIDTH, ANTENNA B**

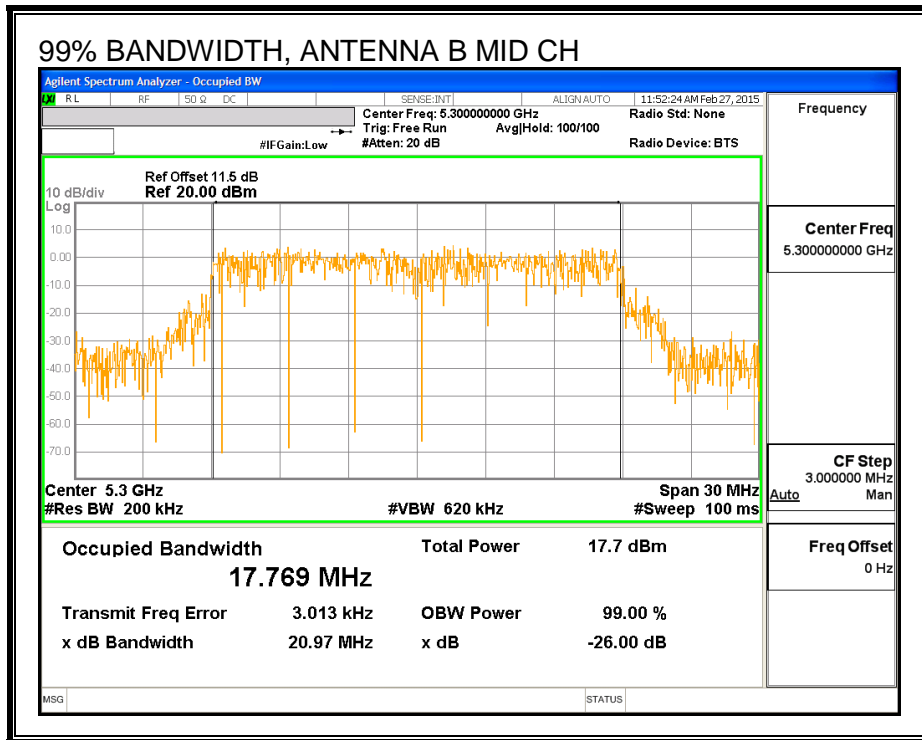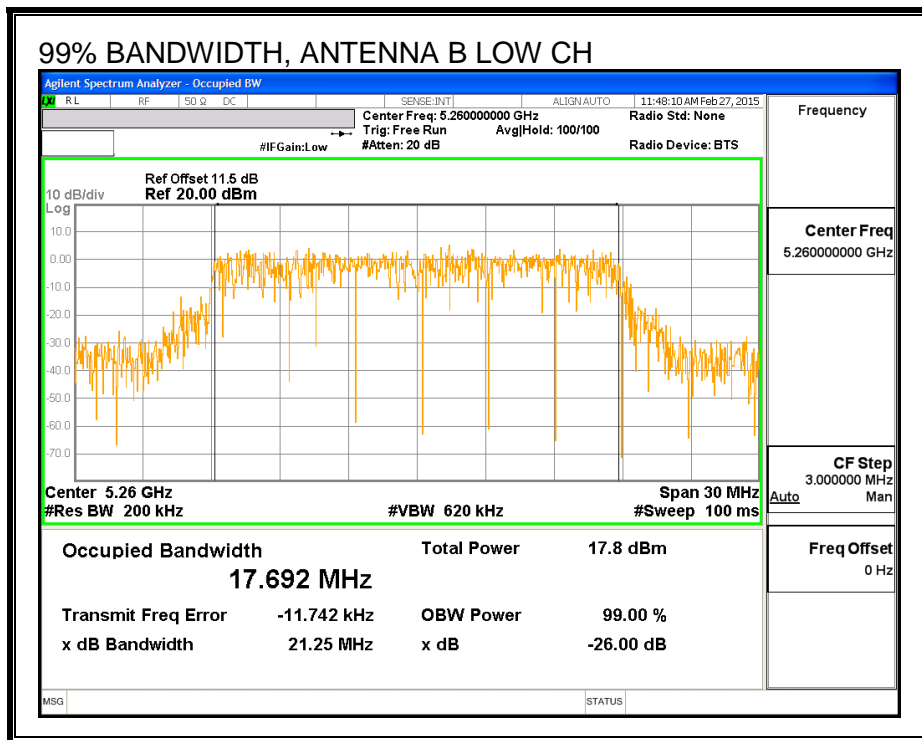

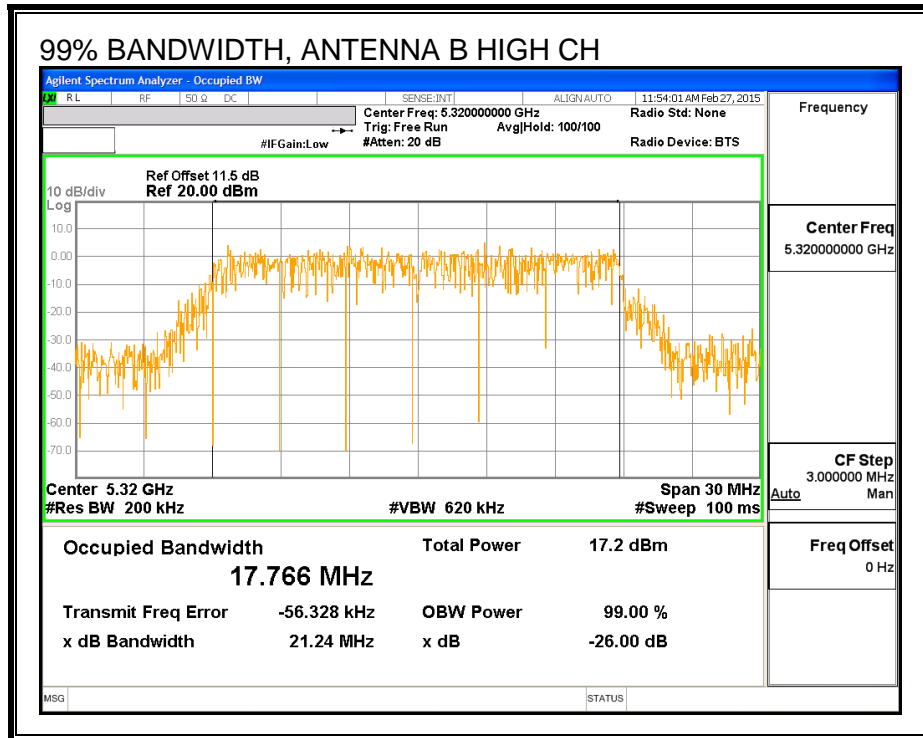

**99% BANDWIDTH, ANTENNA A**

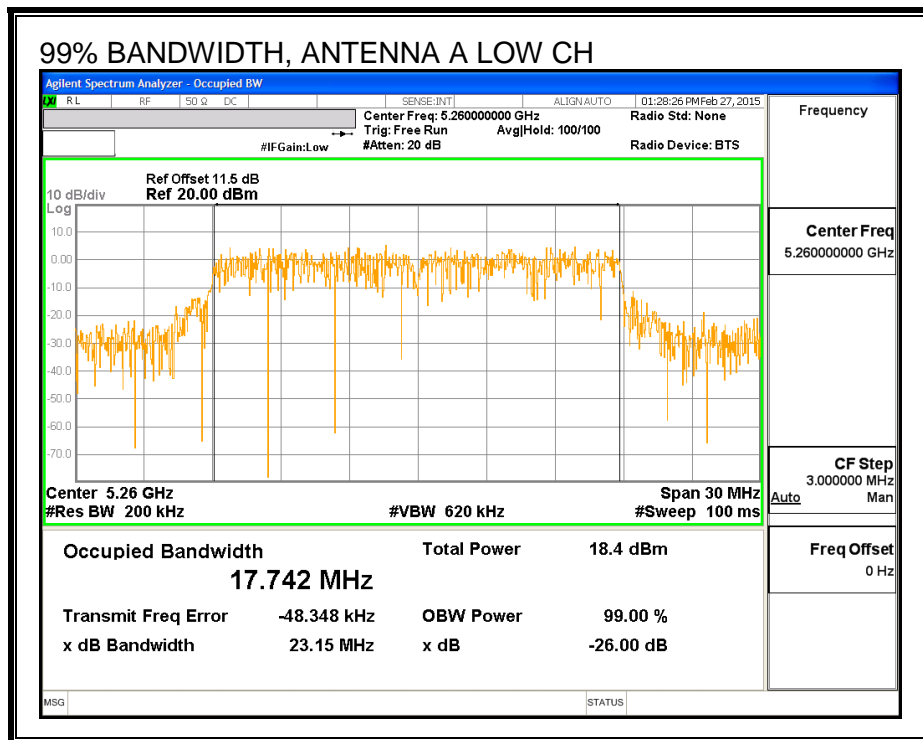

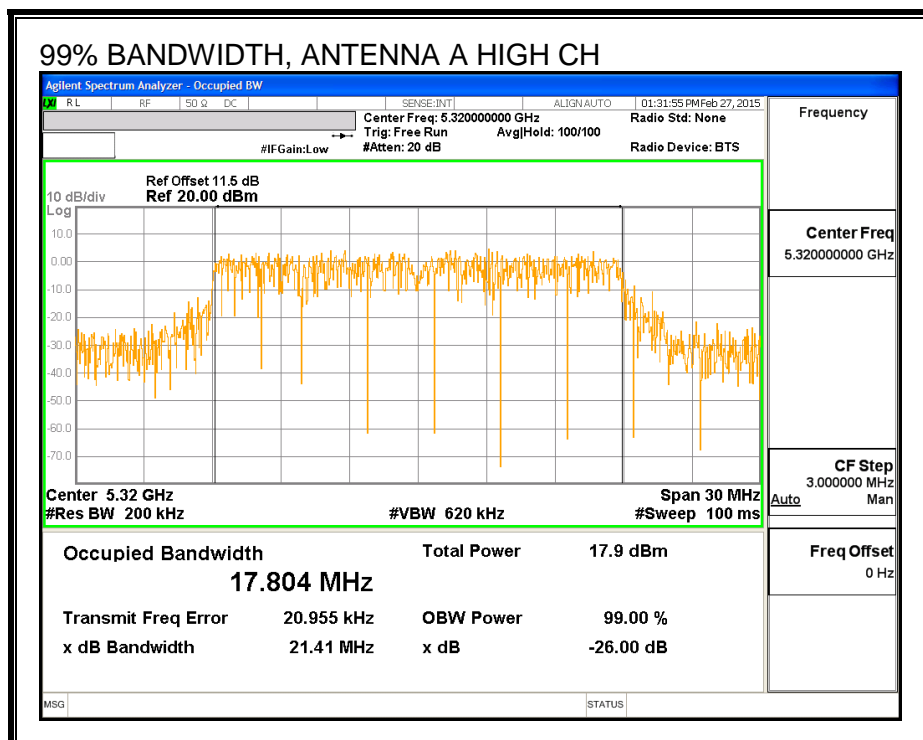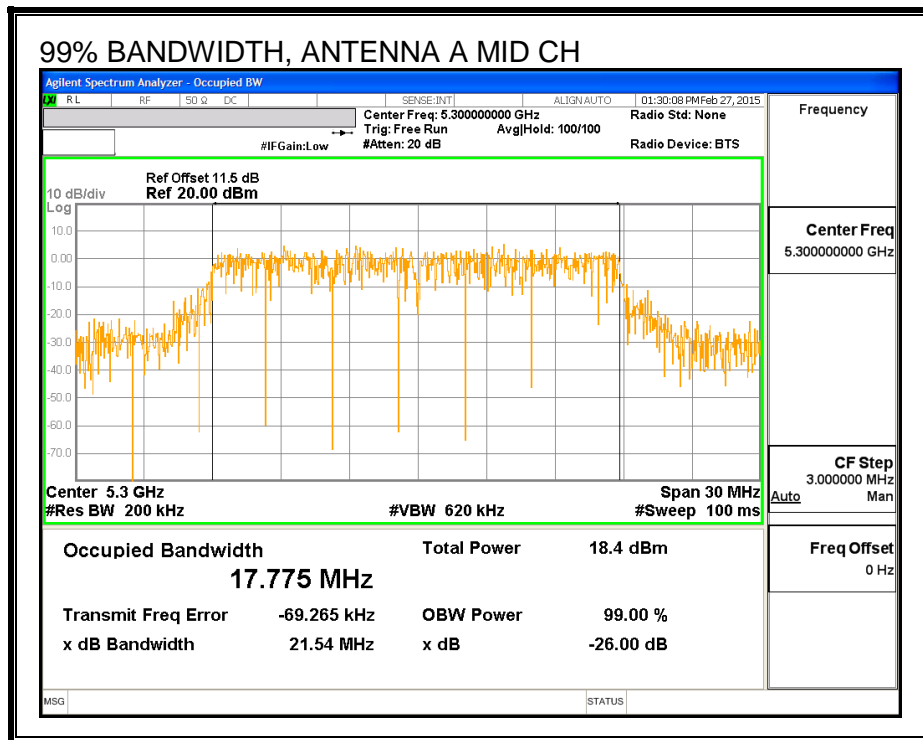

---

### 8.14.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5260	15.54	15.52	18.54
Mid	5300	15.60	15.58	18.60
High	5320	15.10	15.08	18.10



**8.14.4. OUTPUT POWER AND PSD**

**LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
4.20	3.10	3.68

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
4.20	3.10	6.68

**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.75	3.68	6.68	24.00	10.32
Mid	5300	21.78	3.68	6.68	24.00	10.32
High	5320	21.66	3.68	6.68	24.00	10.32

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.54	15.52	18.54	24.00	-5.46
Mid	5300	15.60	15.58	18.60	24.00	-5.40
High	5320	15.10	15.08	18.10	24.00	-5.90

**PSD Results**


Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	2.88	3.90	6.43	10.32	-3.89
Mid	5300	2.98	3.93	6.49	10.32	-3.83
High	5320	2.20	3.54	5.93	10.32	-4.39



**PSD, ANTENNA B**

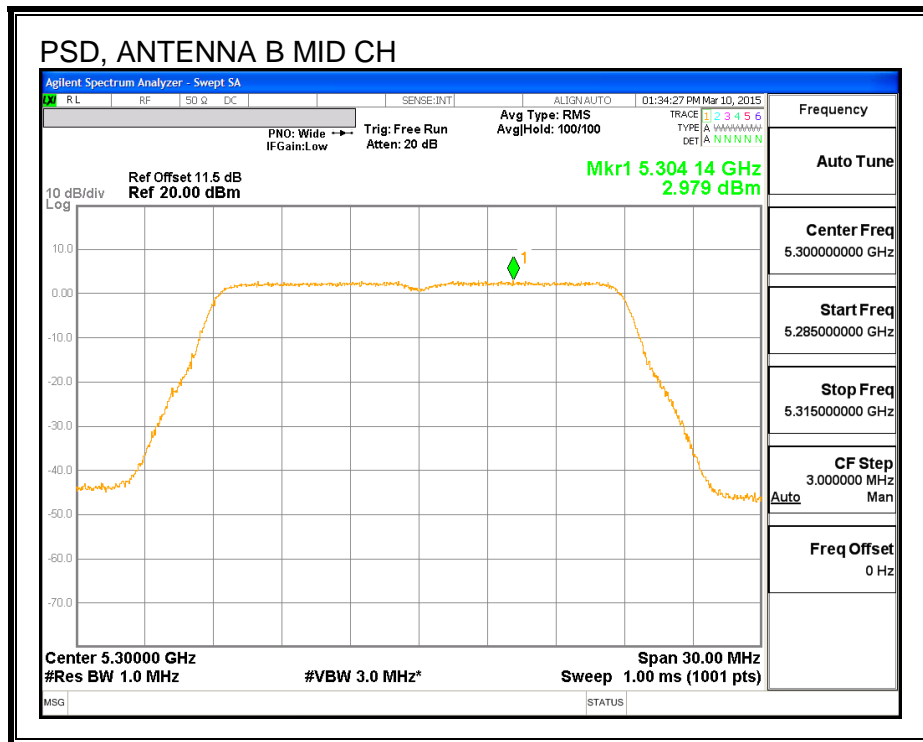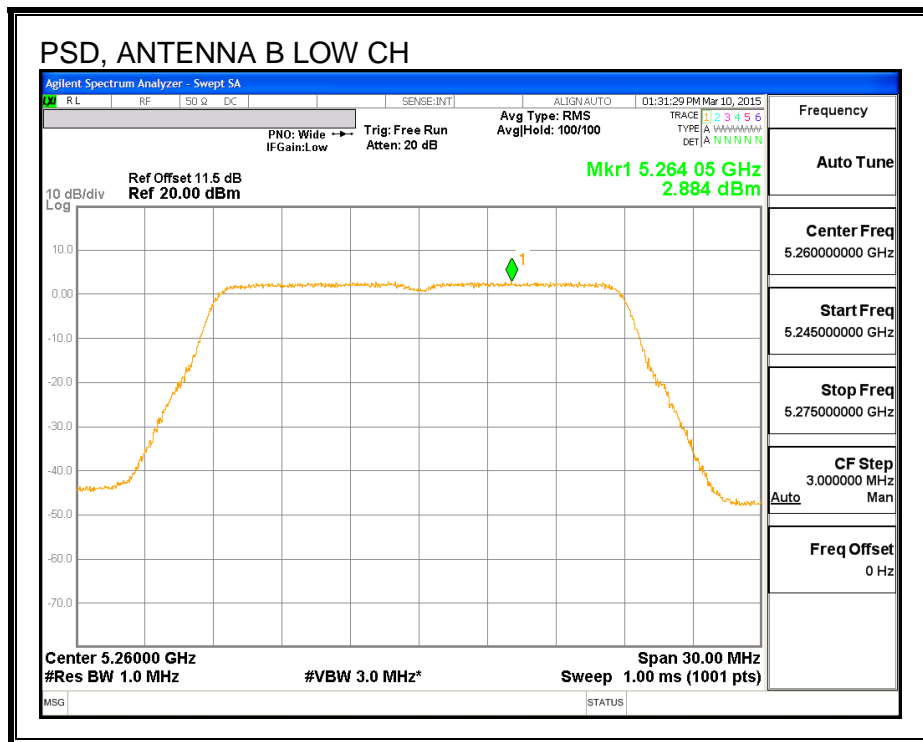

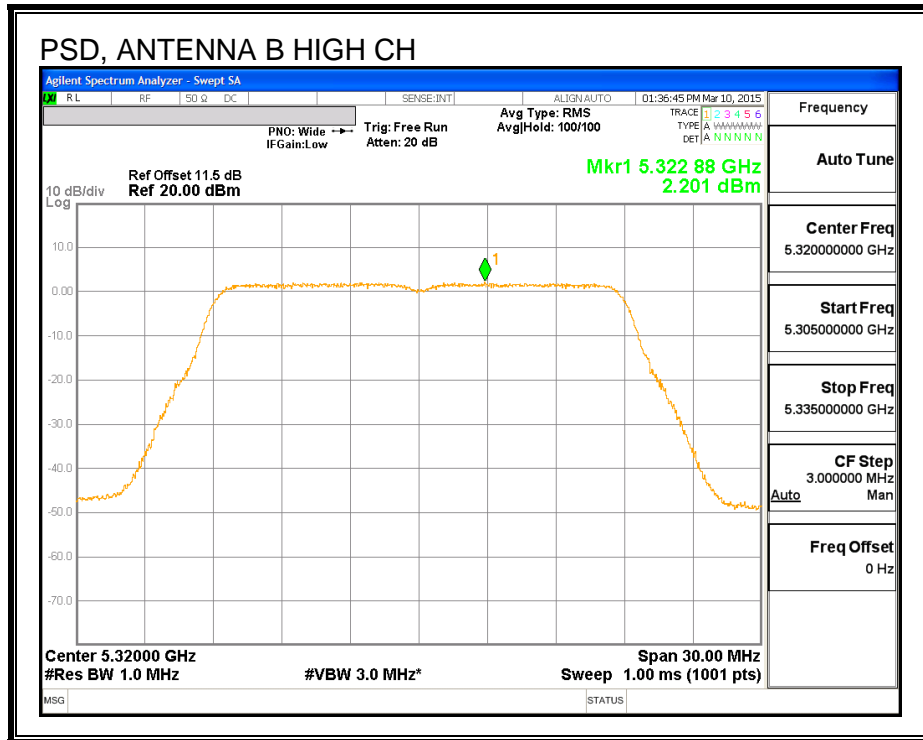

**PSD, ANTENNA A**

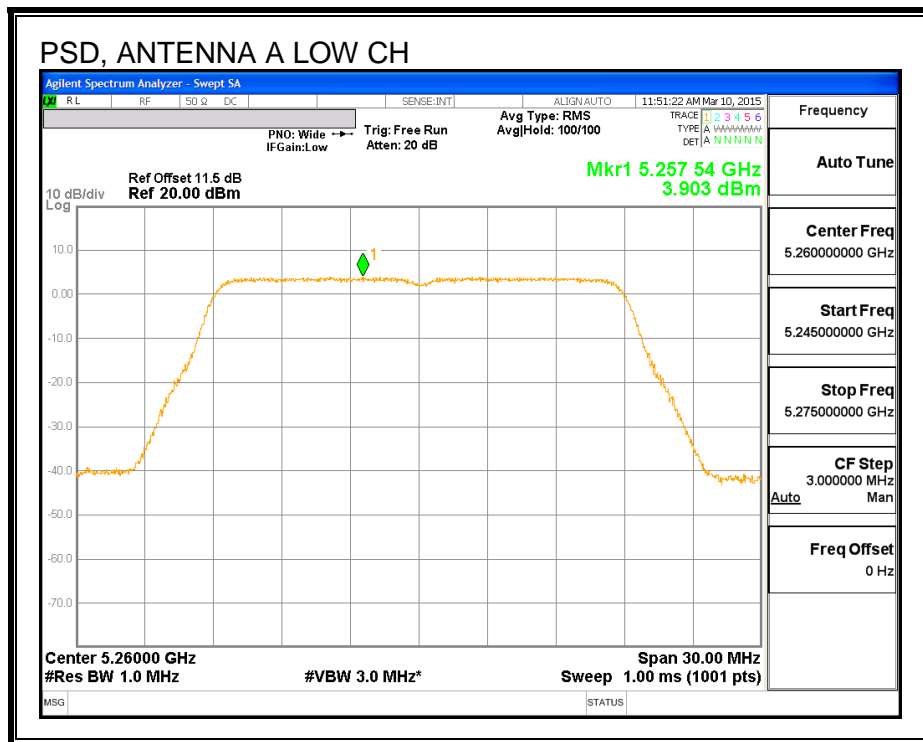

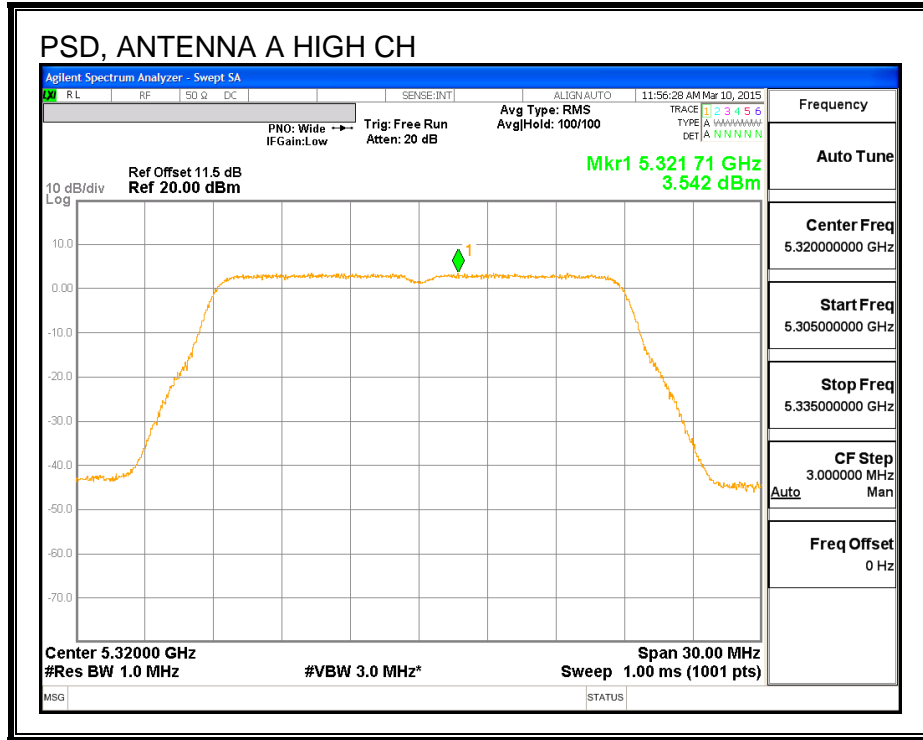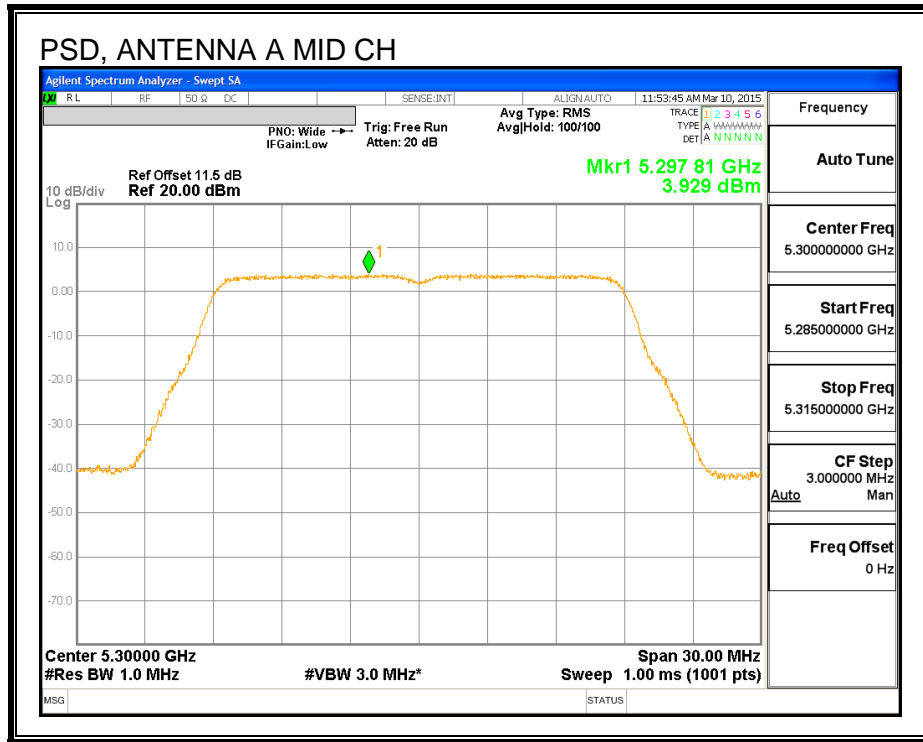

---

## 8.15. 802.11n HT20 2Tx STBC MODE IN THE 5.3 GHz BAND

### 8.15.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5260	21.75	21.81
Mid	5300	22.05	21.84
High	5320	21.96	21.96

**26 dB BANDWIDTH, ANTENNA B**

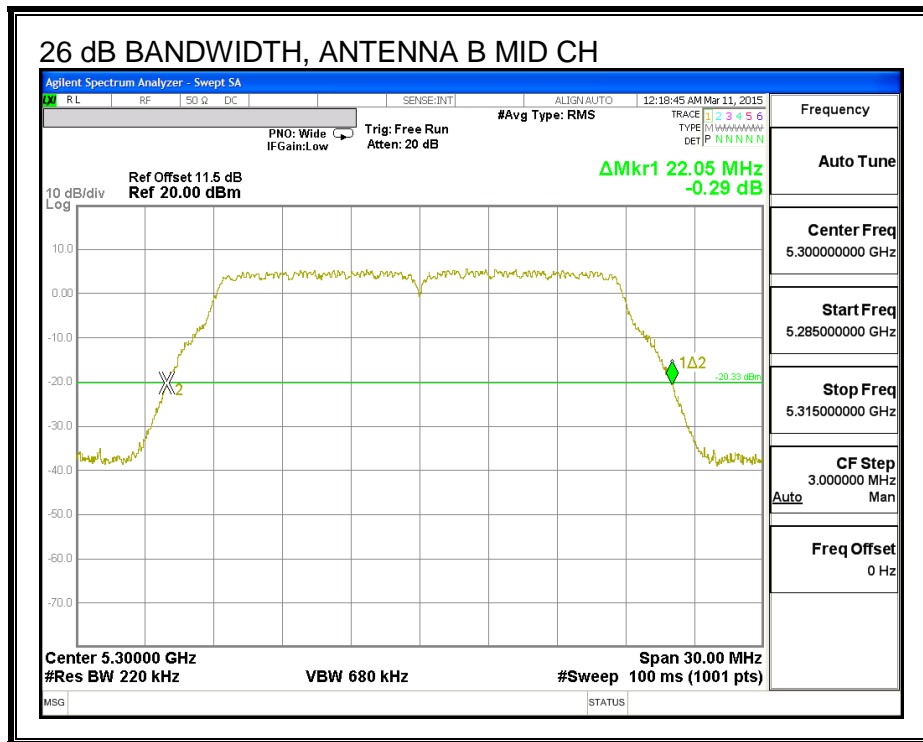
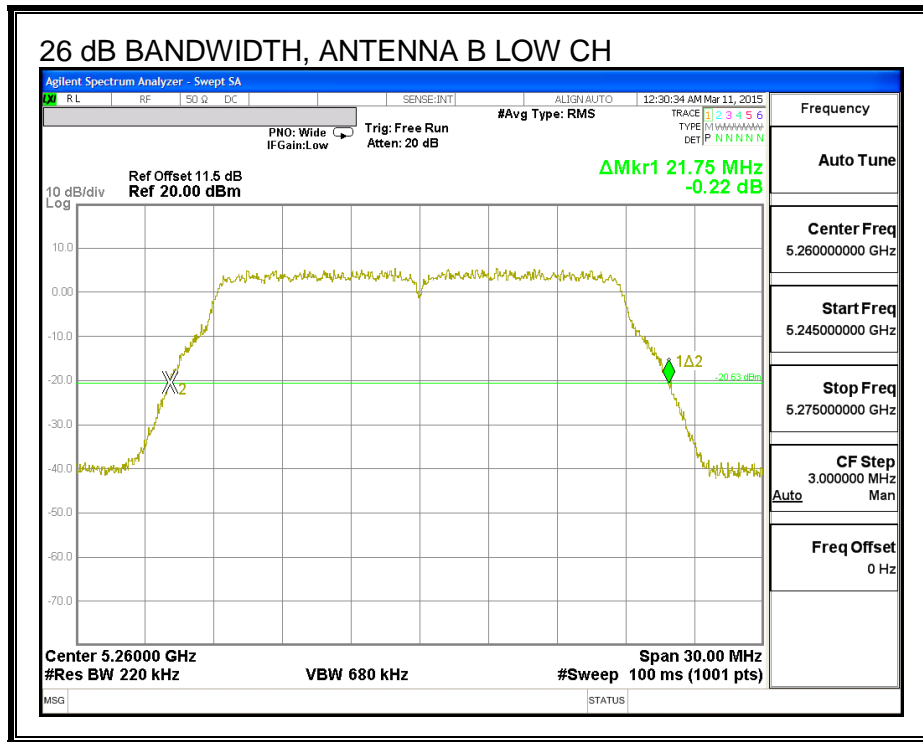


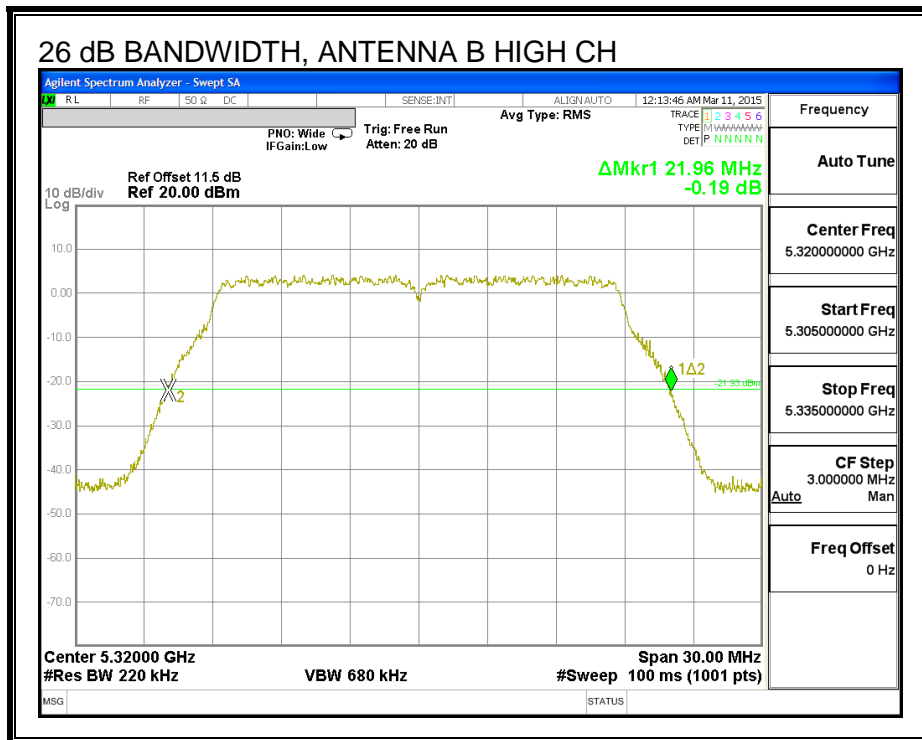

**26 dB BANDWIDTH, ANTENNA A**

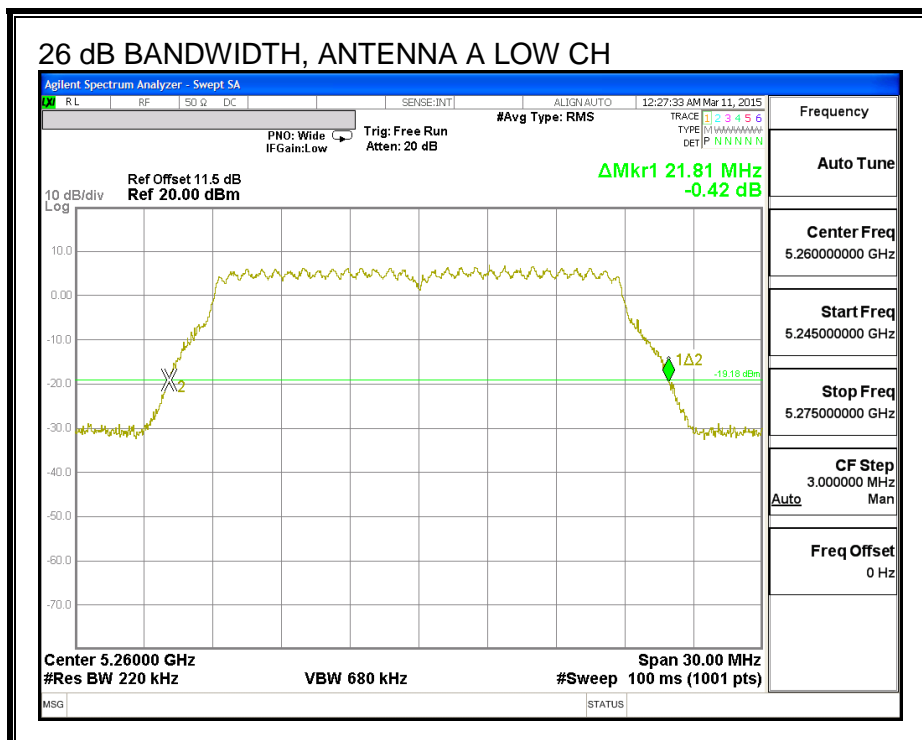



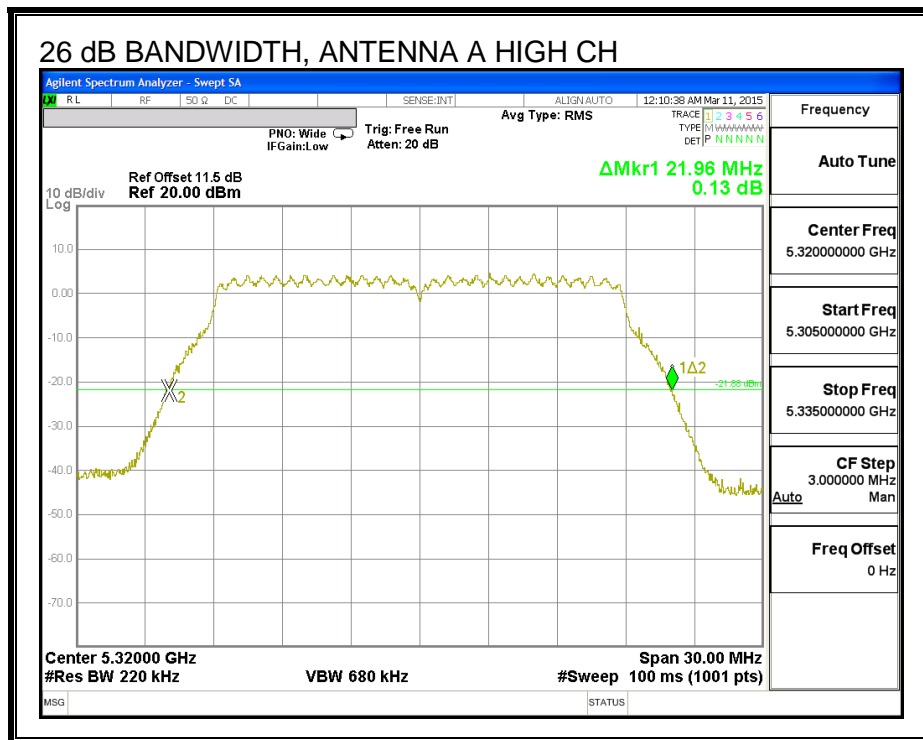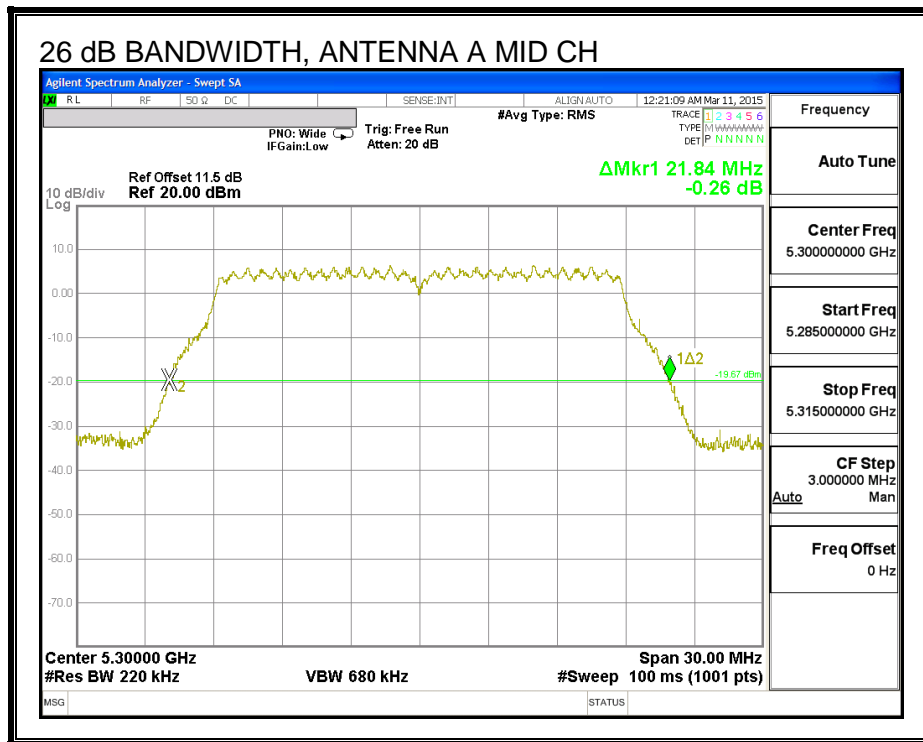

---

**8.15.2. 99% BANDWIDTH**



**LIMITS**


None; for reporting purposes only.

**RESULTS**


Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5260	17.686	17.678
Mid	5300	17.736	17.730
High	5320	17.718	17.689



**99% BANDWIDTH, ANTENNA B**

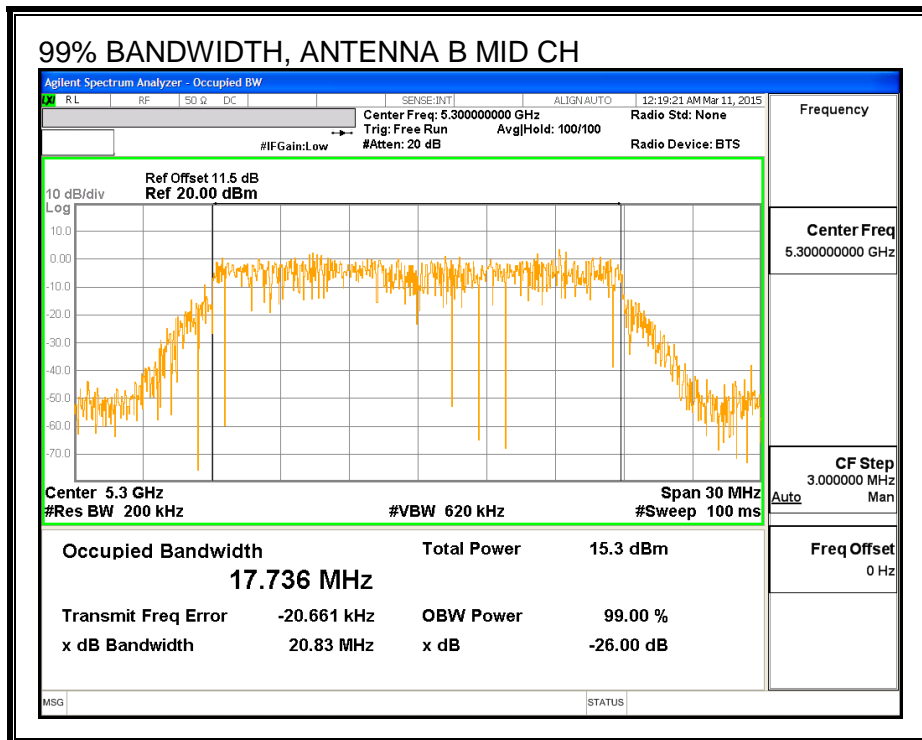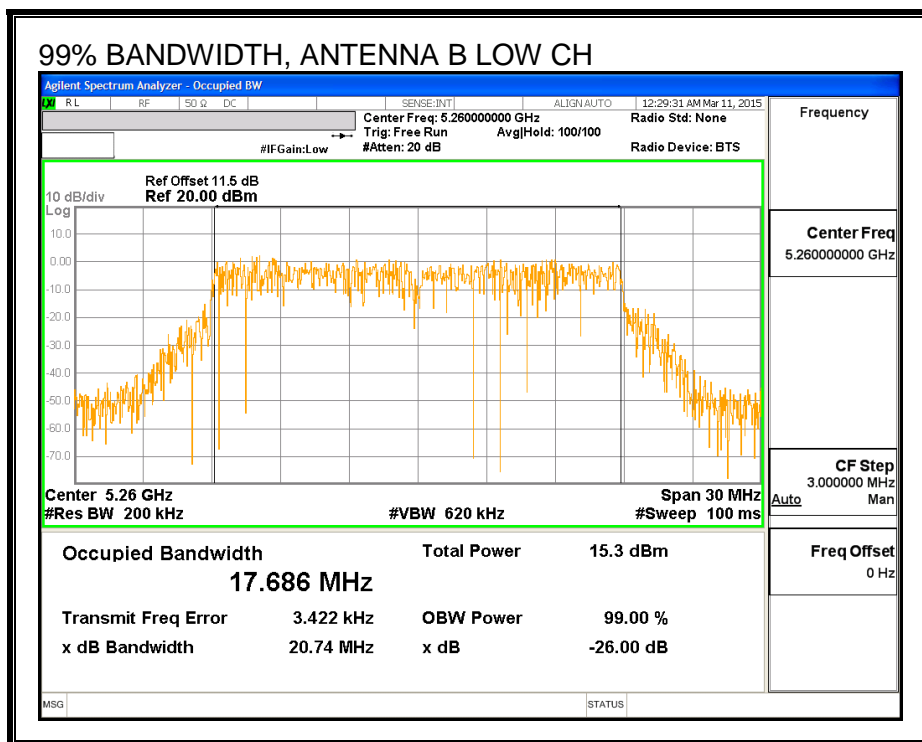

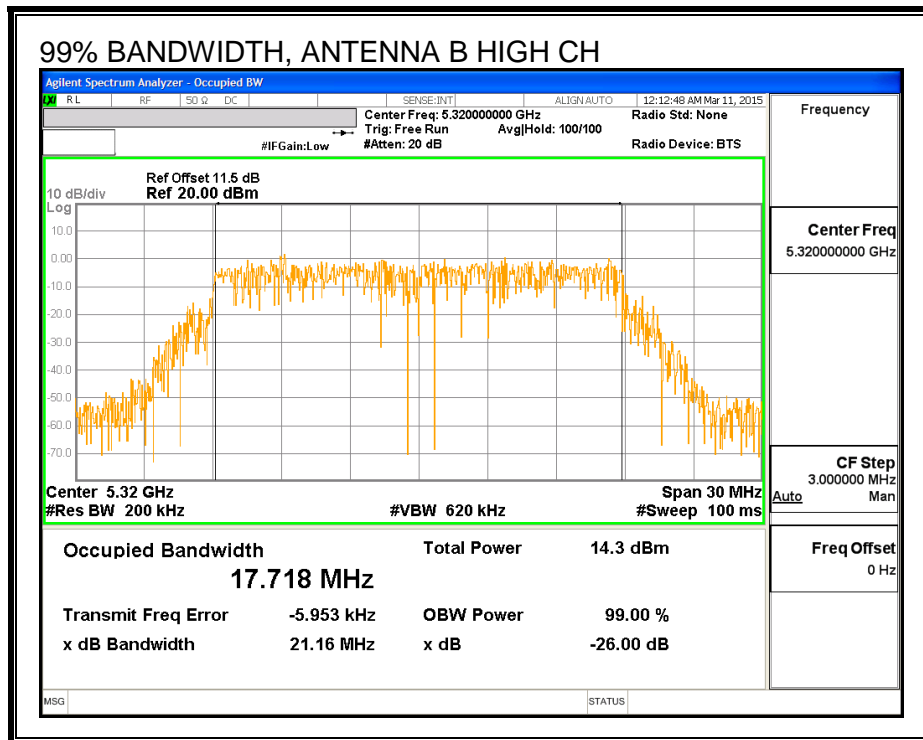

**99% BANDWIDTH, ANTENNA A**

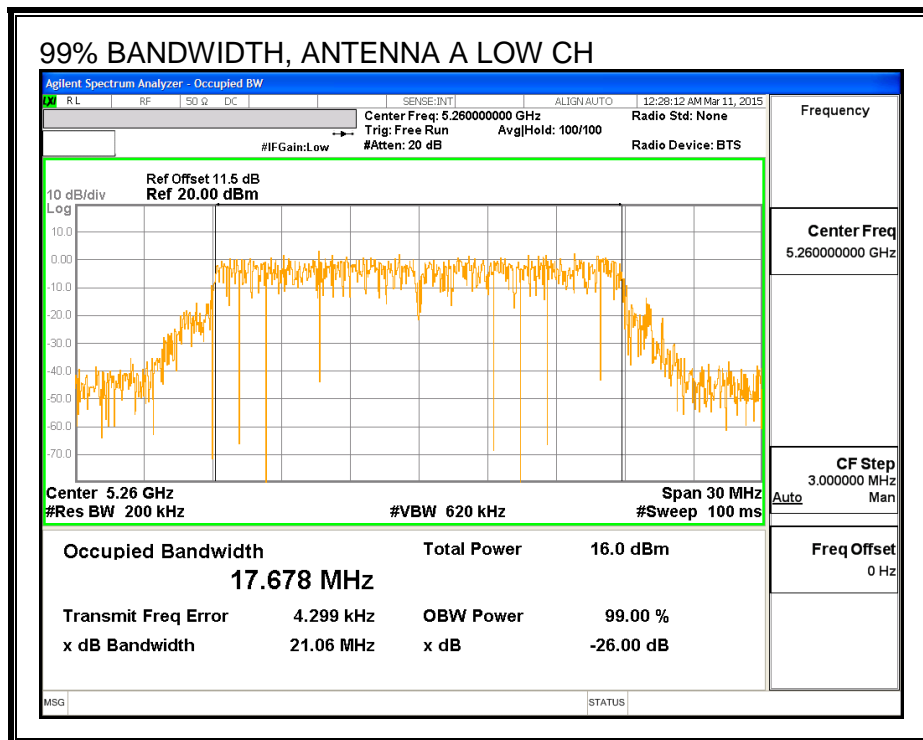

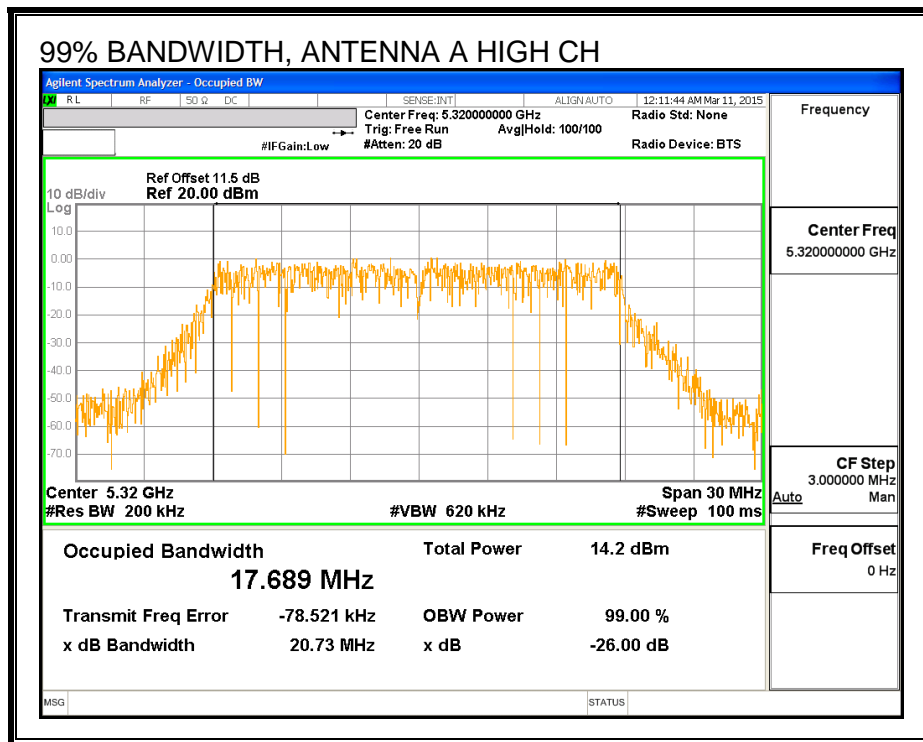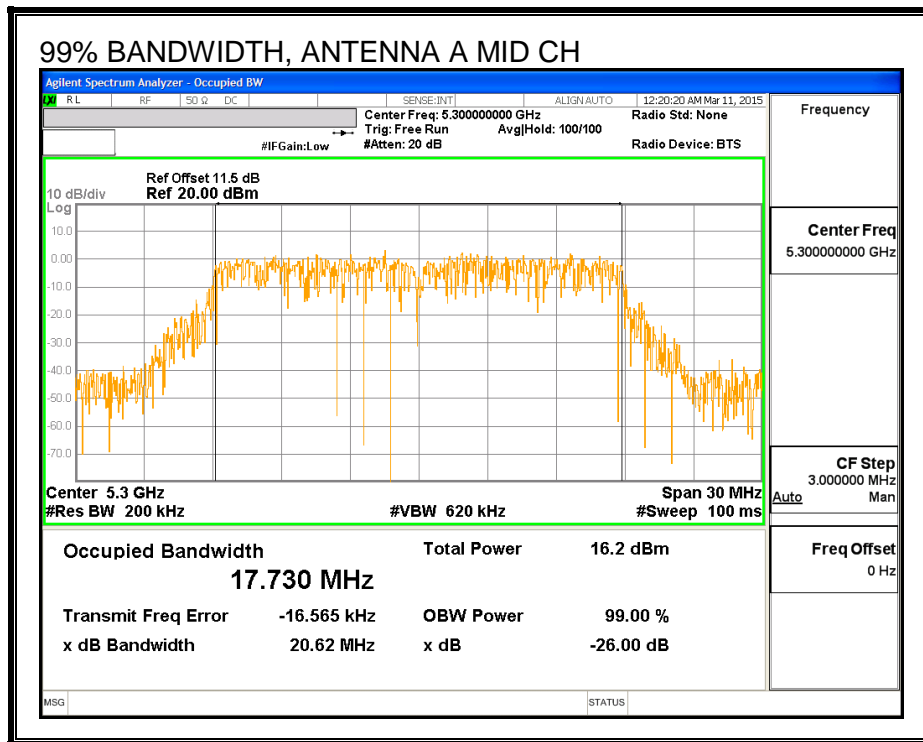

---

### 8.15.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5260	15.60	16.10	18.87
Mid	5300	15.58	16.08	18.85
High	5320	14.92	15.04	17.99

### 8.15.4. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna B Antenna Gain (dBi)</b>	<b>Antenna A Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
4.20	3.10	3.68

**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.75	3.68	3.68	24.00	11.00
Mid	5300	21.84	3.68	3.68	24.00	11.00
High	5320	21.96	3.68	3.68	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.60	16.10	18.87	24.00	-5.13
Mid	5300	15.58	16.08	18.85	24.00	-5.15
High	5320	14.92	15.04	17.99	24.00	-6.01


**PSD Results**

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.24	4.78	7.53	11.00	-3.47
Mid	5300	4.14	4.73	7.45	11.00	-3.55
High	5320	3.41	3.61	6.52	11.00	-4.48






**PSD, ANTENNA B**

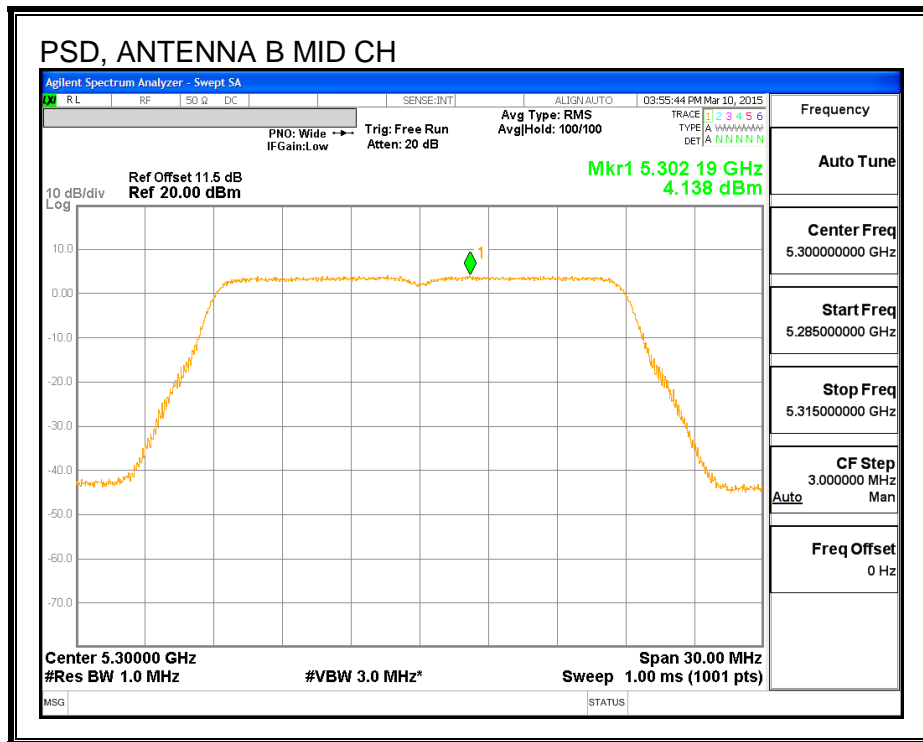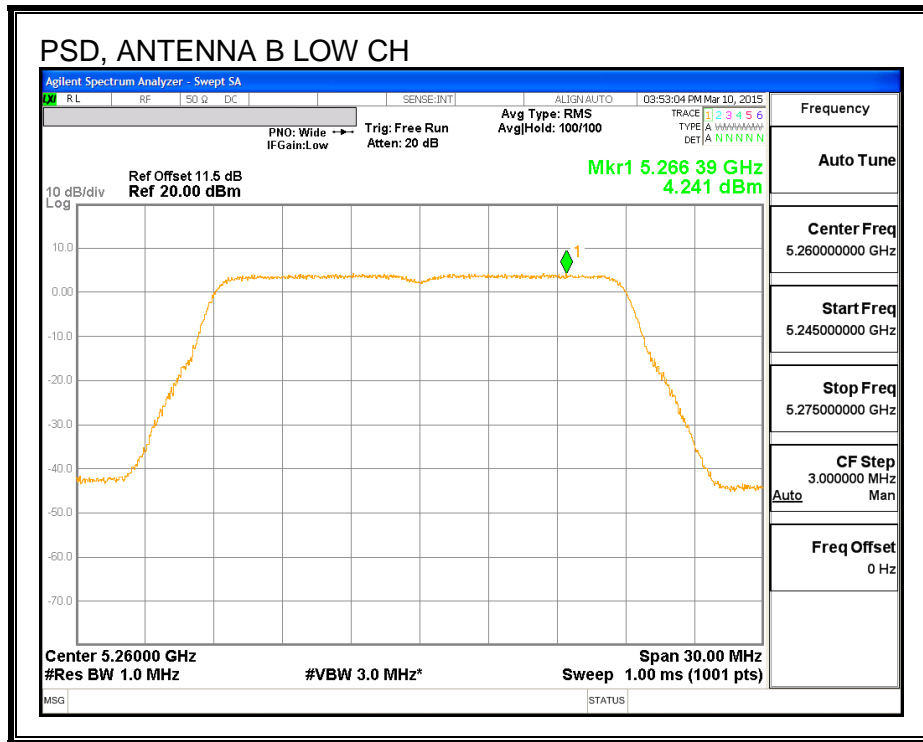

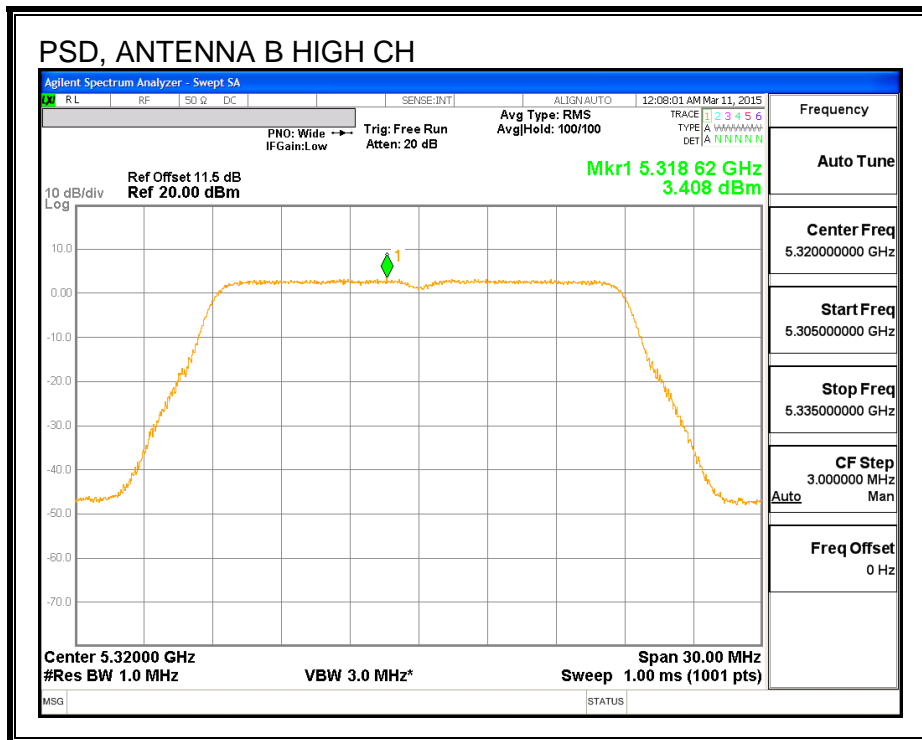

**PSD, ANTENNA A**

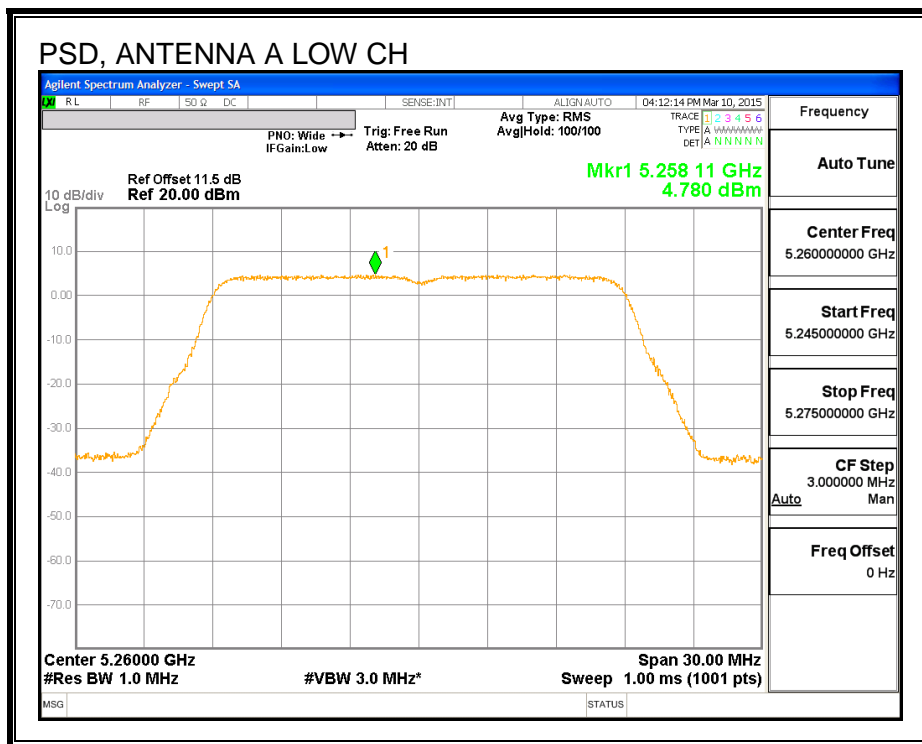

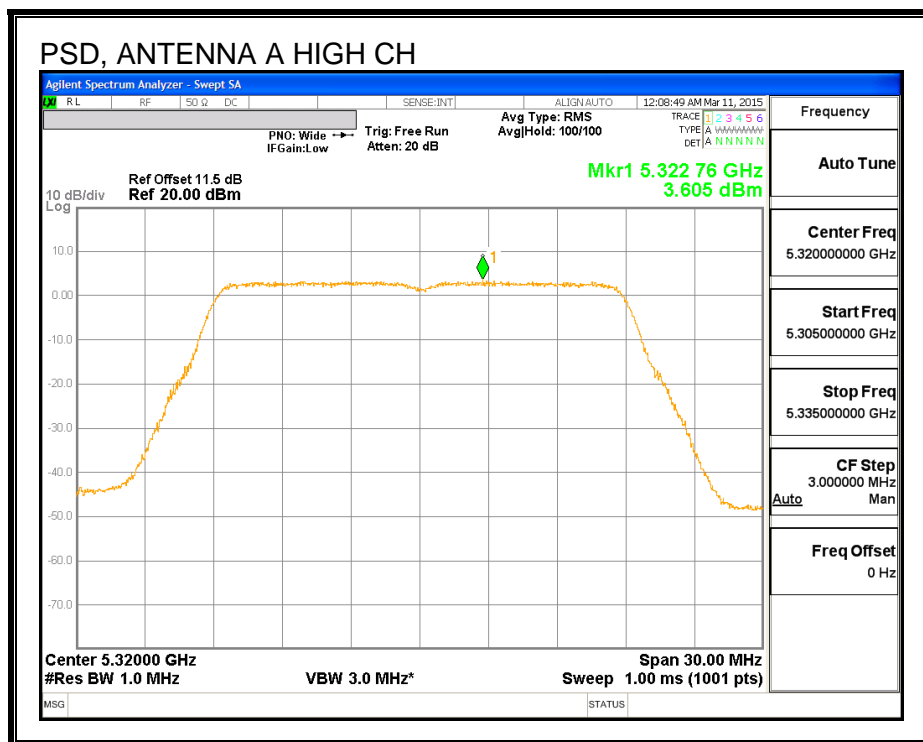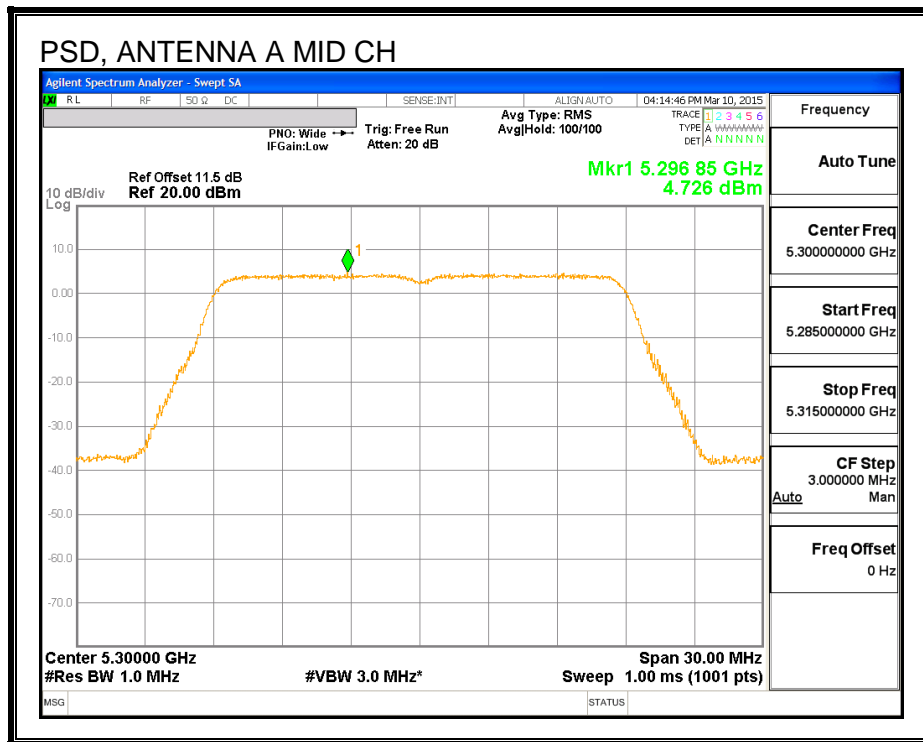

---

## 8.16. 802.11n HT40 SISO MODE IN THE 5.3 GHz BAND ANTENNA B

### 8.16.1. 26 dB BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.20
High	5310	40.32