



PSD, CHAIN 0

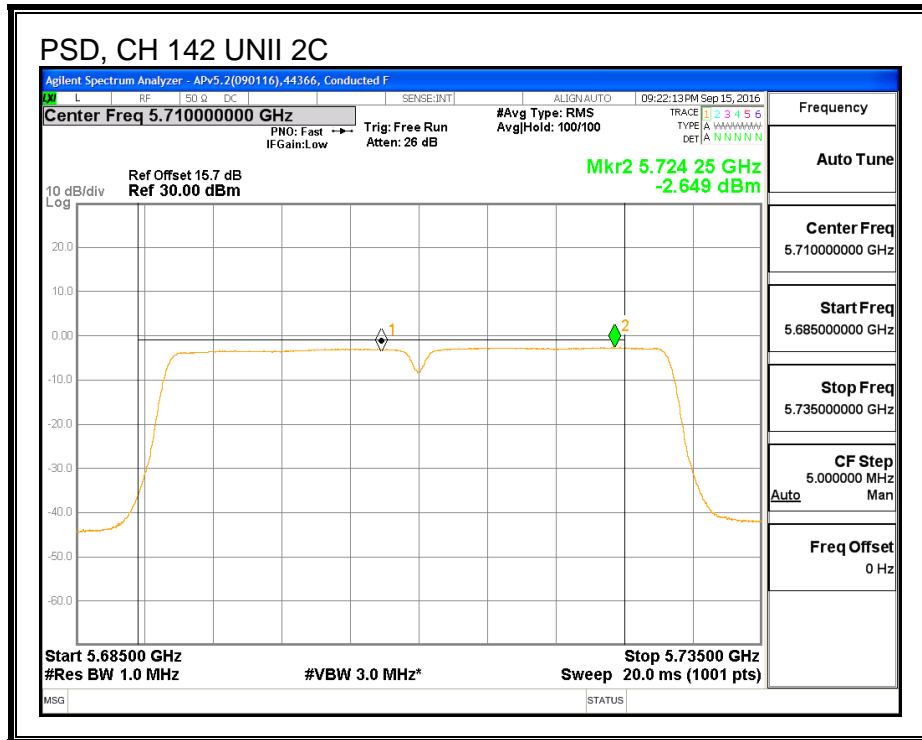

PSD, CHAIN 2

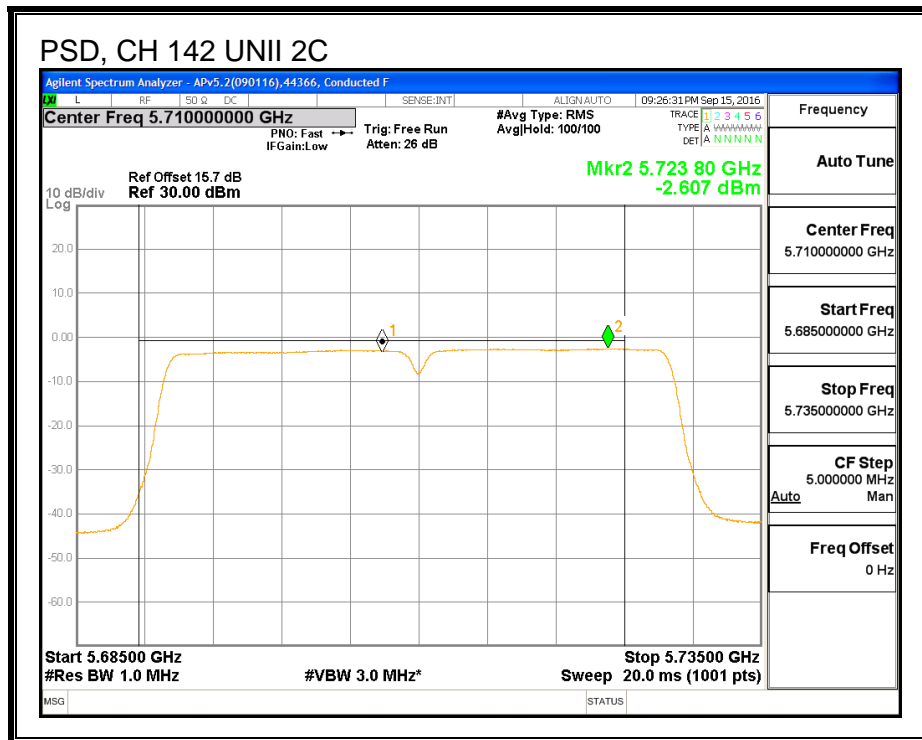

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	5.40	8.06	8.06	27.94	27.94

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	2.01	2.08	5.84	27.94	-22.10


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.50	-5.56	-1.73	27.94	-29.67


OUTPUT POWER, CHAIN 0

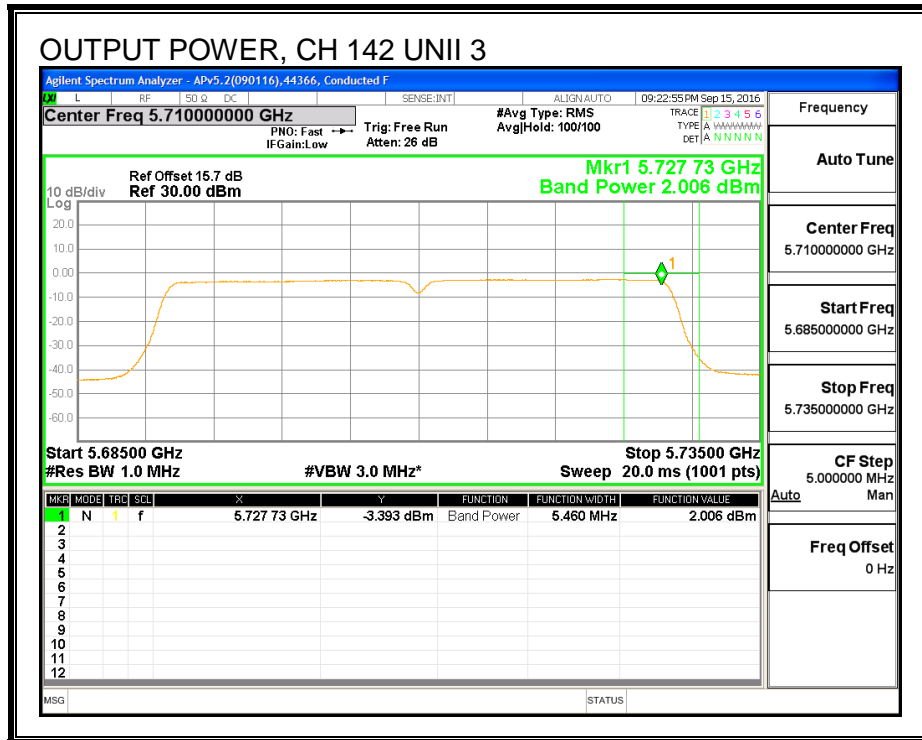


OUTPUT POWER, CHAIN 2

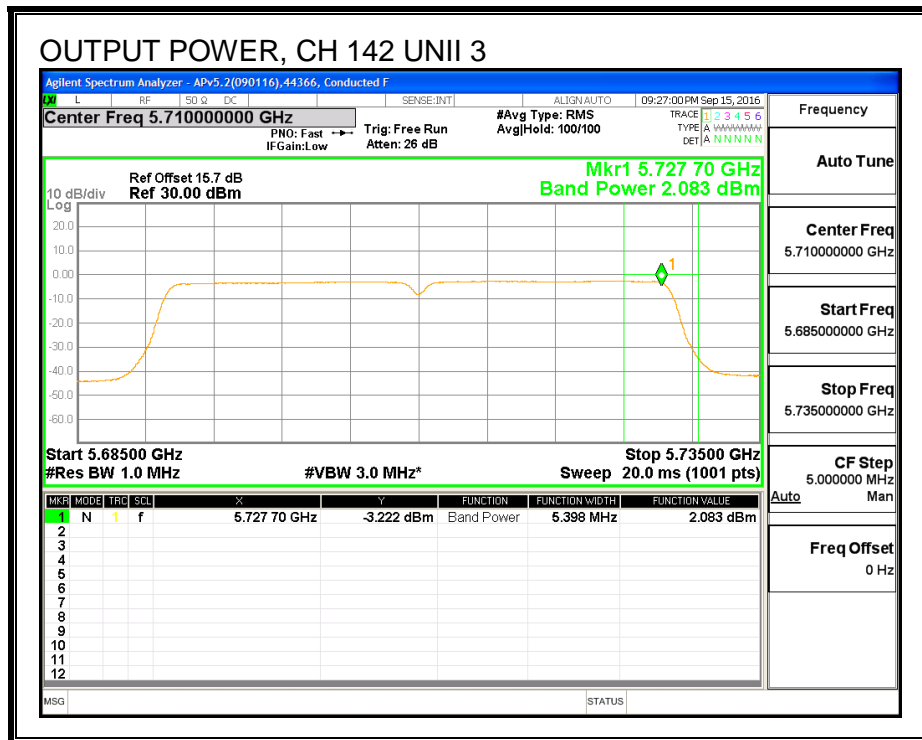

PSD, CHAIN 0

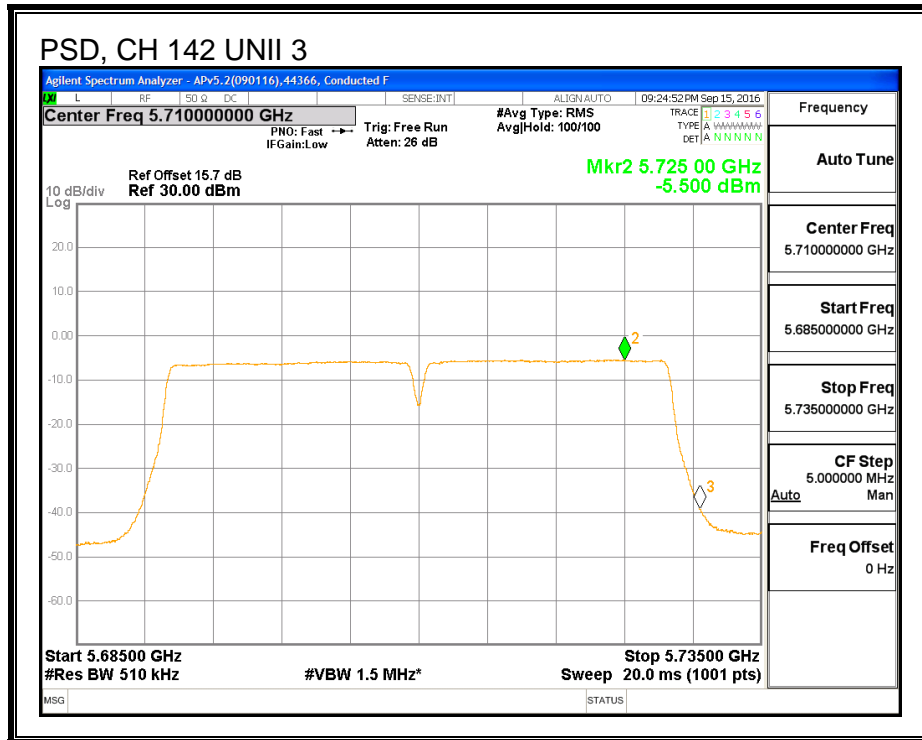

PSD, CHAIN 2

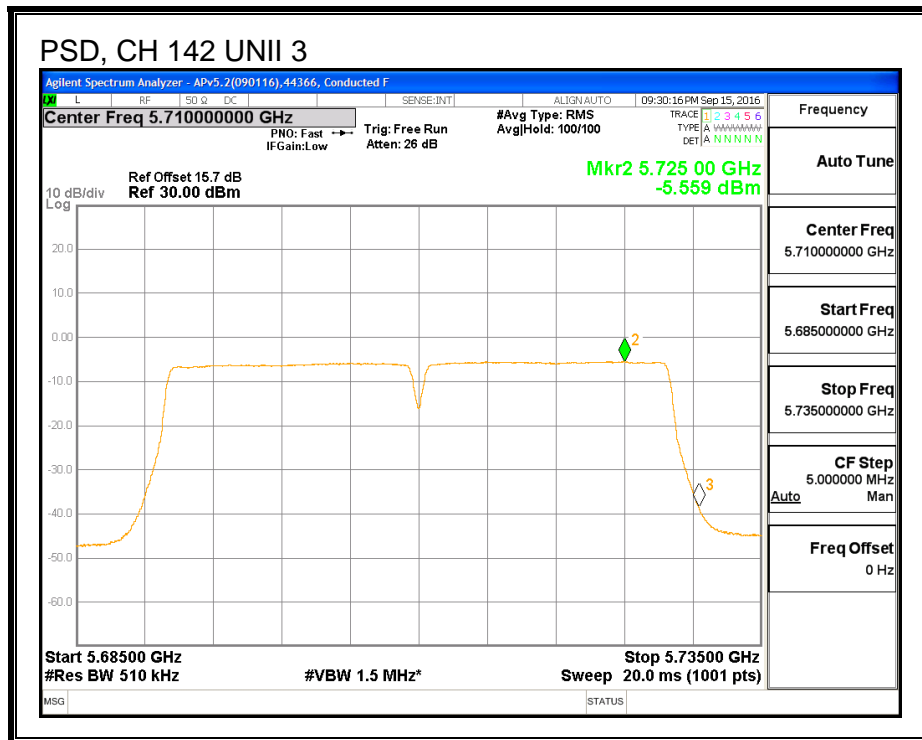

**8.78. 802.11ac VHT40 2Tx (CHAIN 0 + CHAIN 2) BEAM FORMING
 STRADDLE CHANNEL 142 RESULTS (IC)**

8.78.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	33.170	8.06	8.06	21.94	8.94

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	11.63	11.70	15.47	21.94	-6.47


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.65	-2.61	1.17	8.94	-7.77


OUTPUT POWER, CHAIN 0

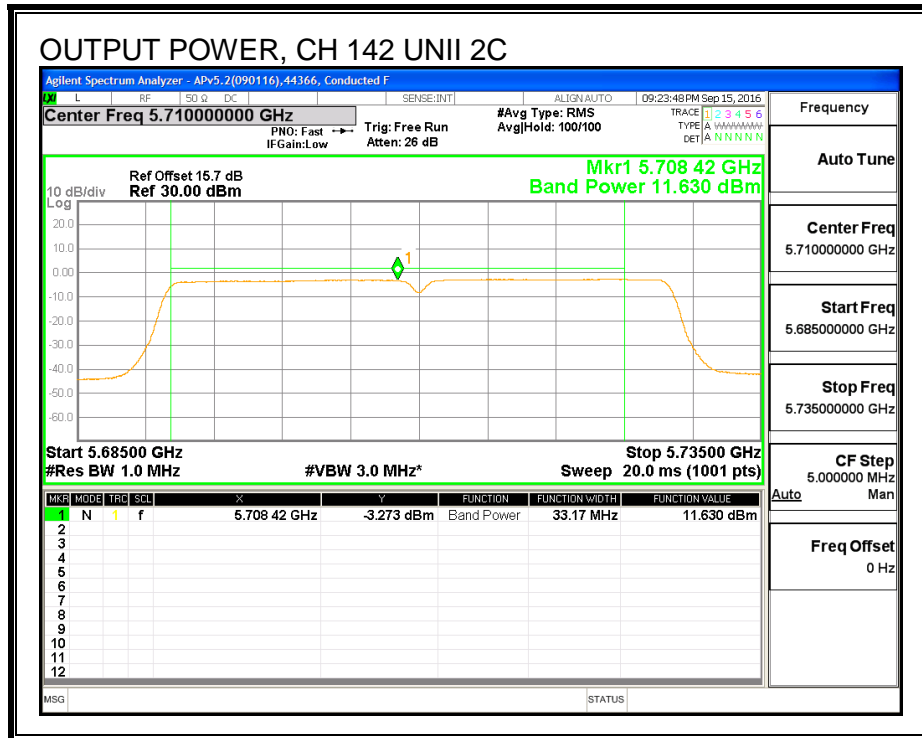


OUTPUT POWER, CHAIN 2

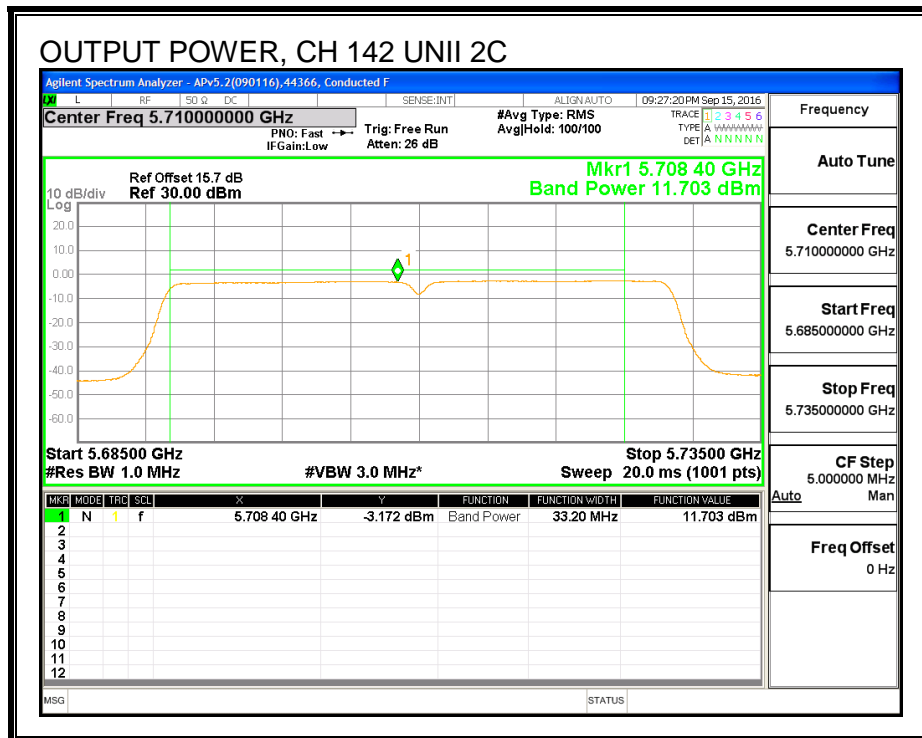

PSD, CHAIN 0

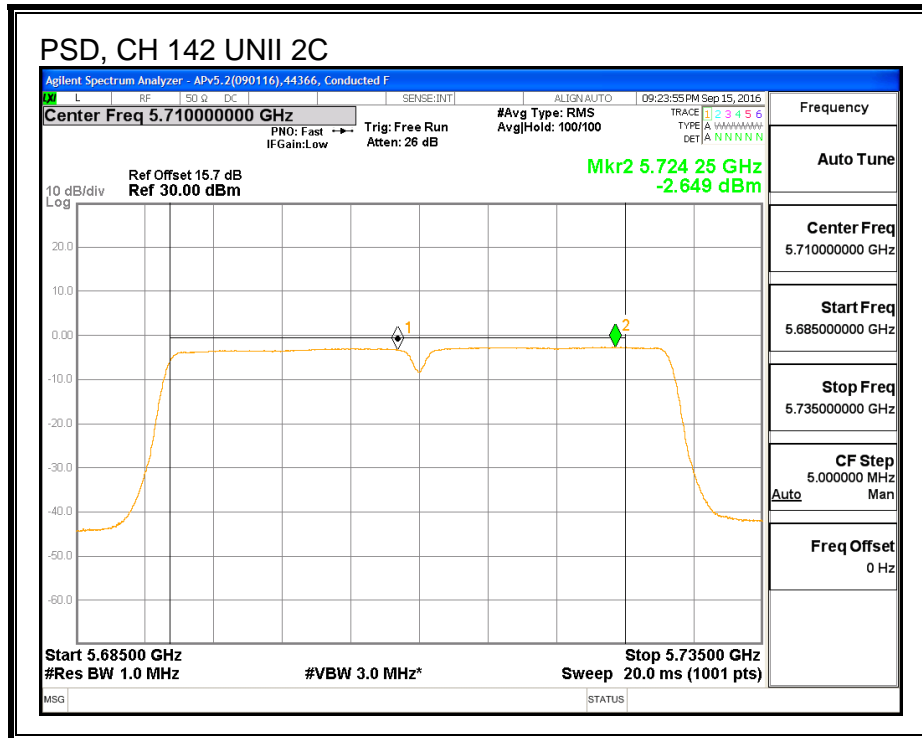

PSD, CHAIN 2

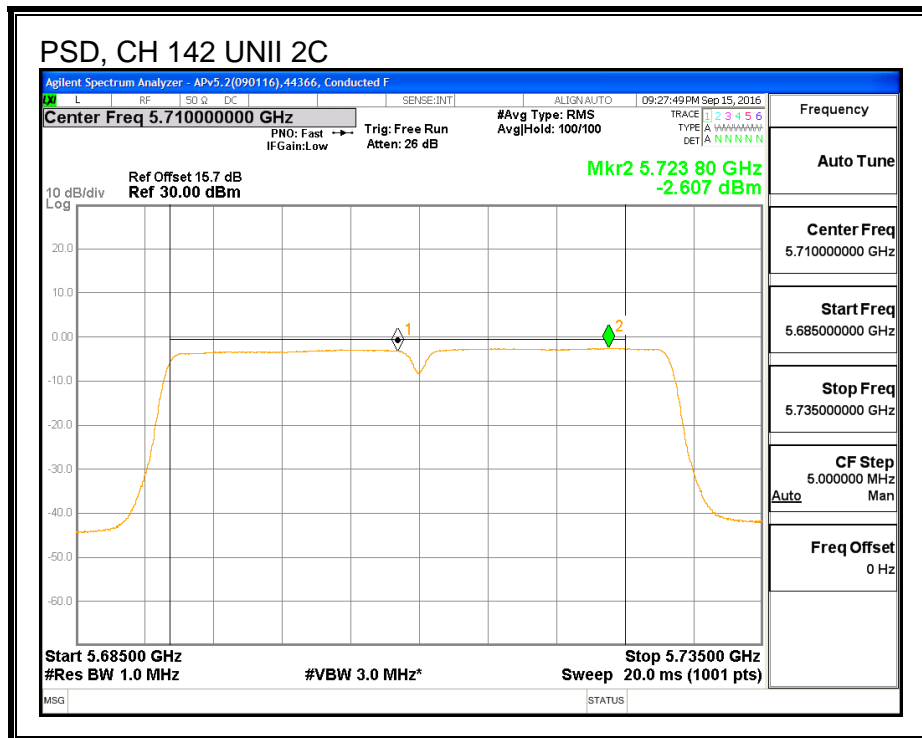

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	3.167	8.06	8.06	27.94	27.94

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.69	1.79	5.54	27.94	-22.40


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.50	-5.56	-1.73	27.94	-29.67


OUTPUT POWER, CHAIN 0

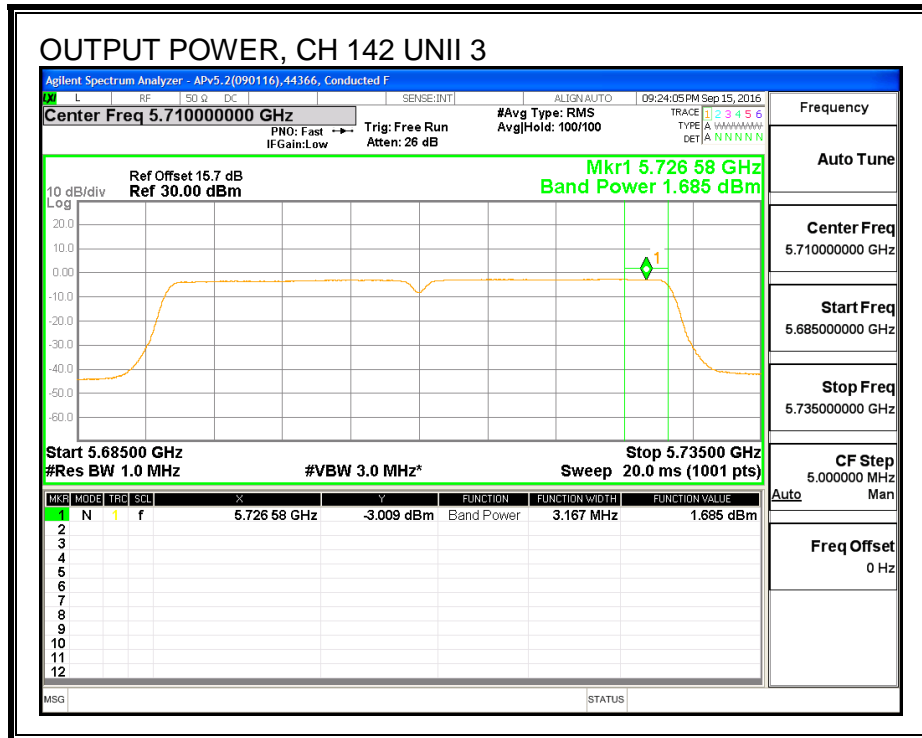


OUTPUT POWER, CHAIN 2

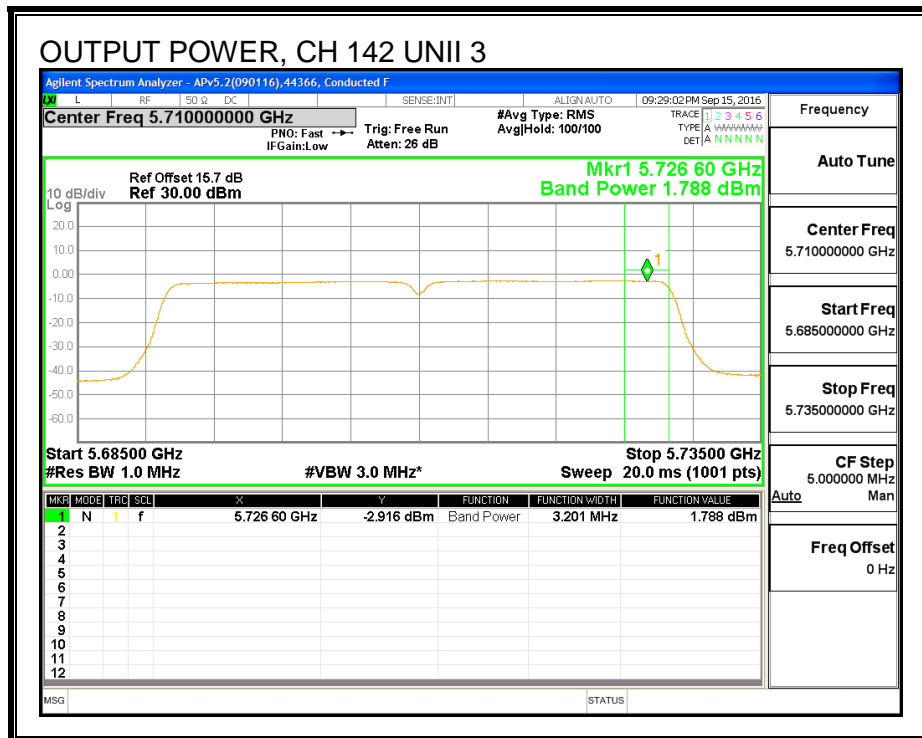

PSD, CHAIN 0

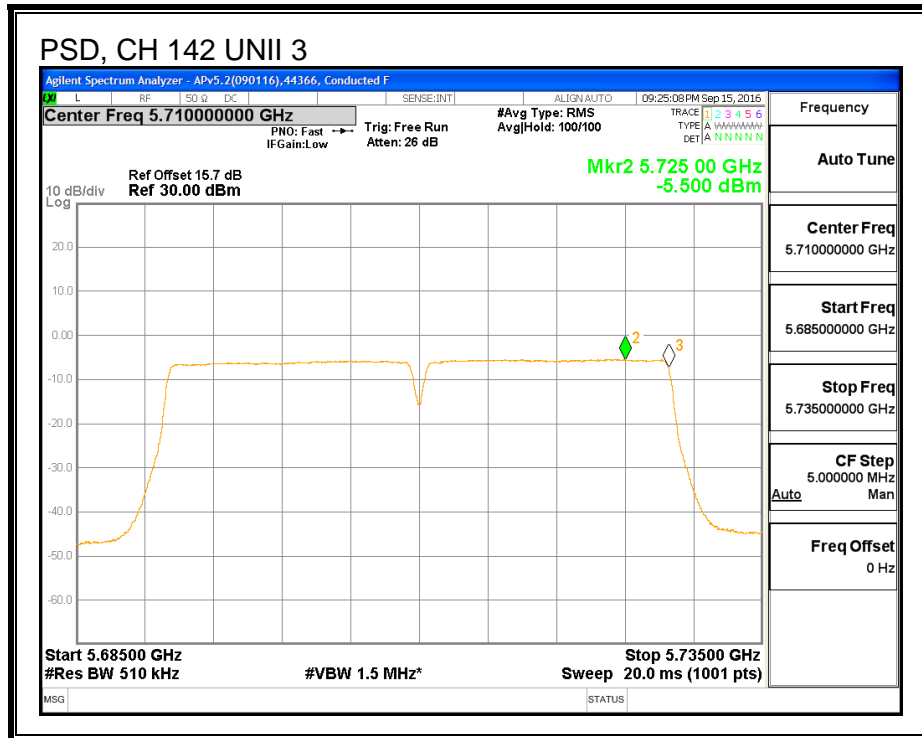

PSD, CHAIN 2

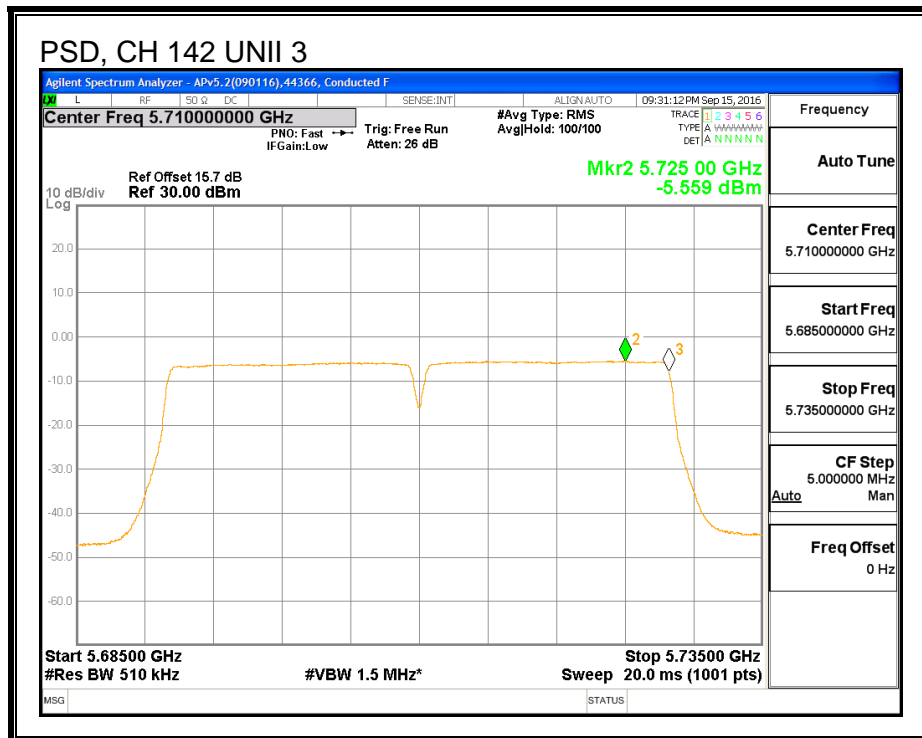

8.78.2. 6 dB BBANDWIDTH

LIMITS

FCC §15.407 (e)


IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 2 (MHz)
142	5710	3.245	3.245

CHAIN 0

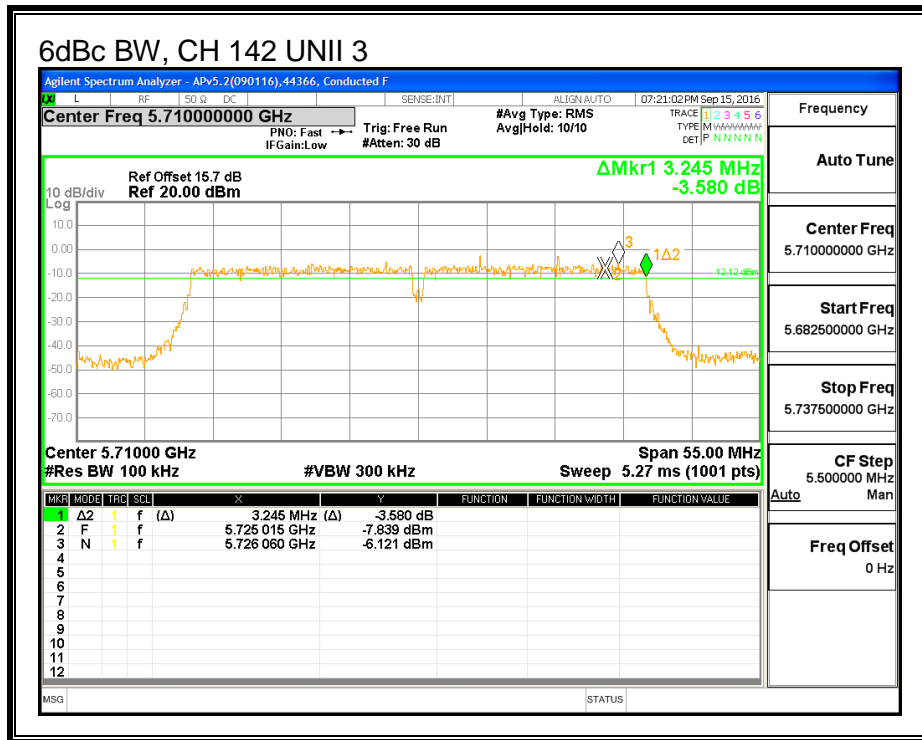

CHAIN 2

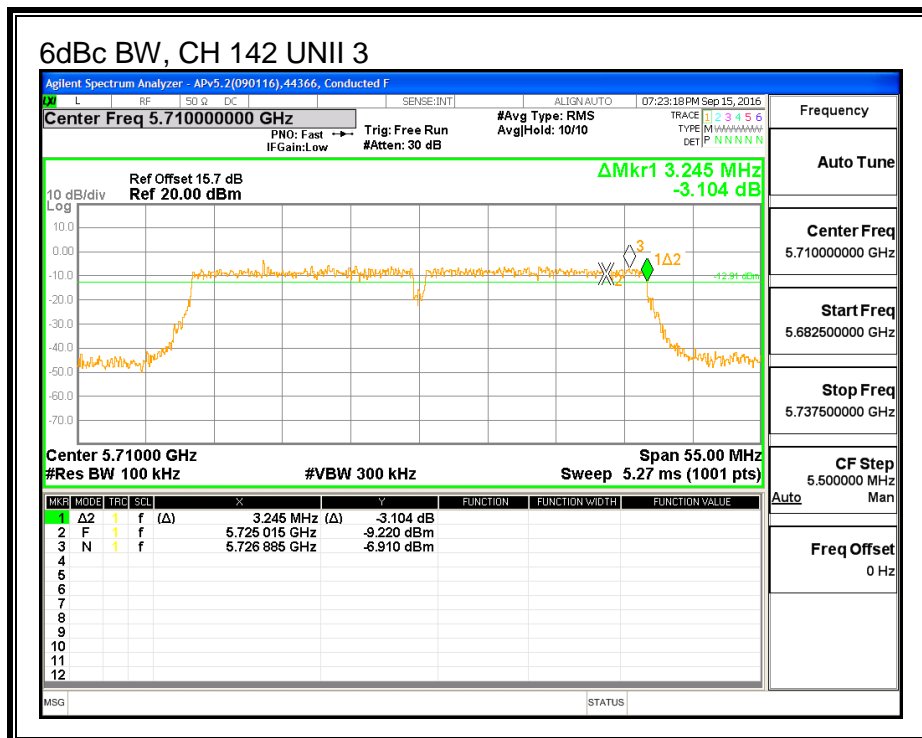

8.79. 802.11n HT40 2Tx (CHAIN 1 + CHAIN 2) BEAM FORMING MODE IN THE 5.6 GHz BAND

8.79.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5510	40.321	40.382
Mid	5550	40.443	40.443
High	5670	40.443	40.443
142	5710	40.858	40.982



26 dB BANDWIDTH, CHAIN 1

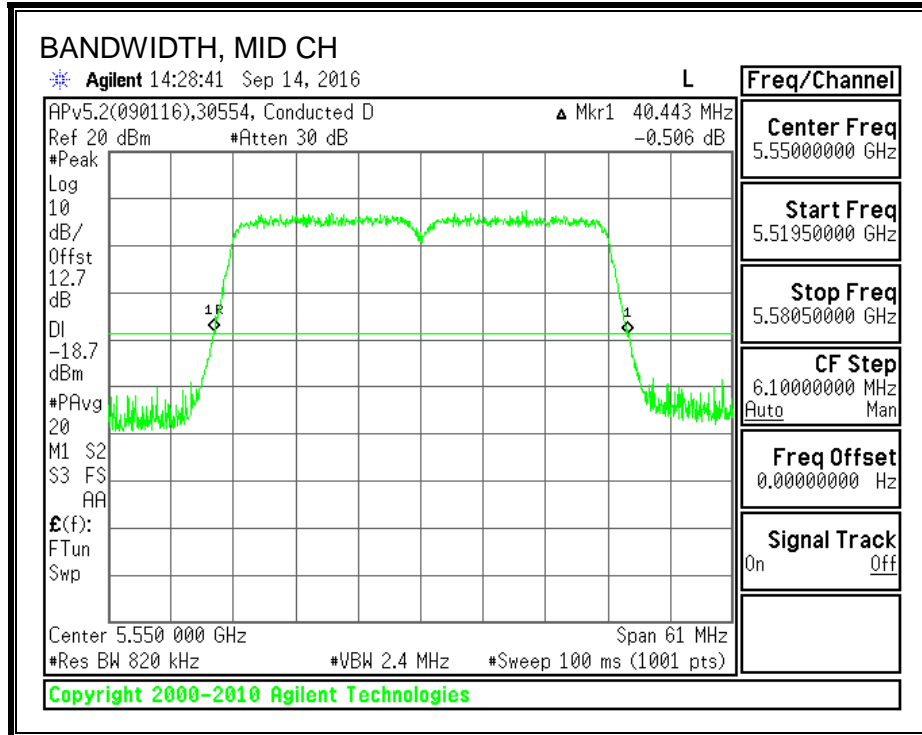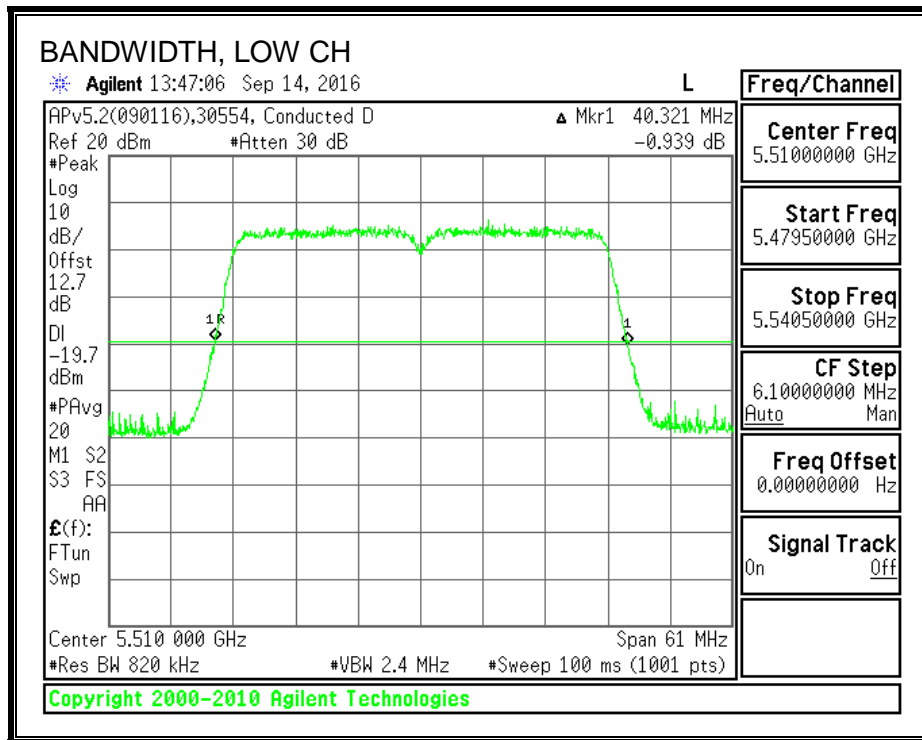

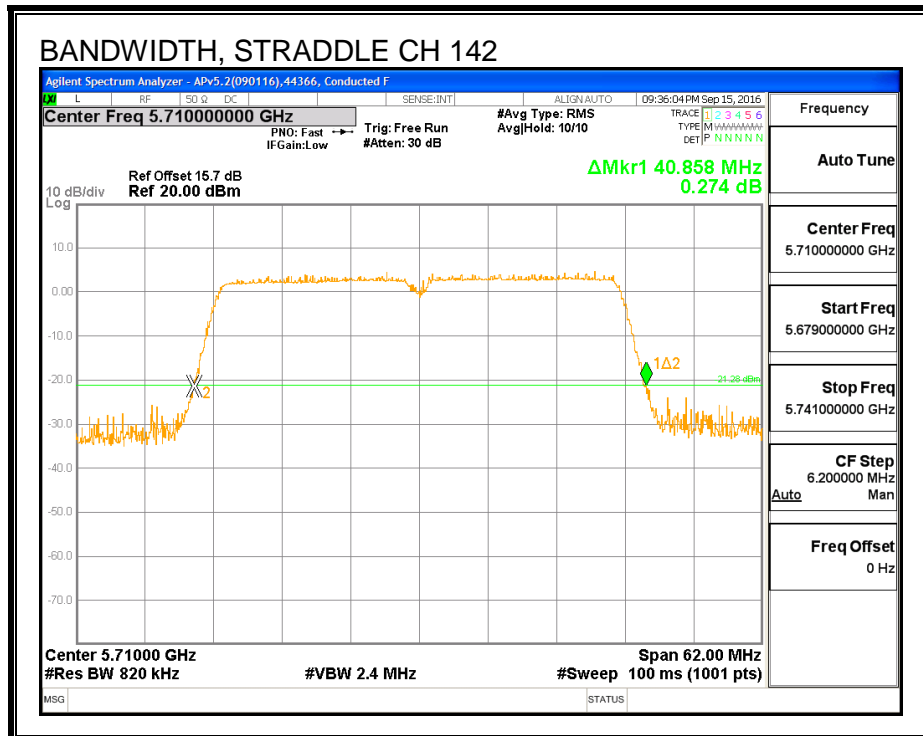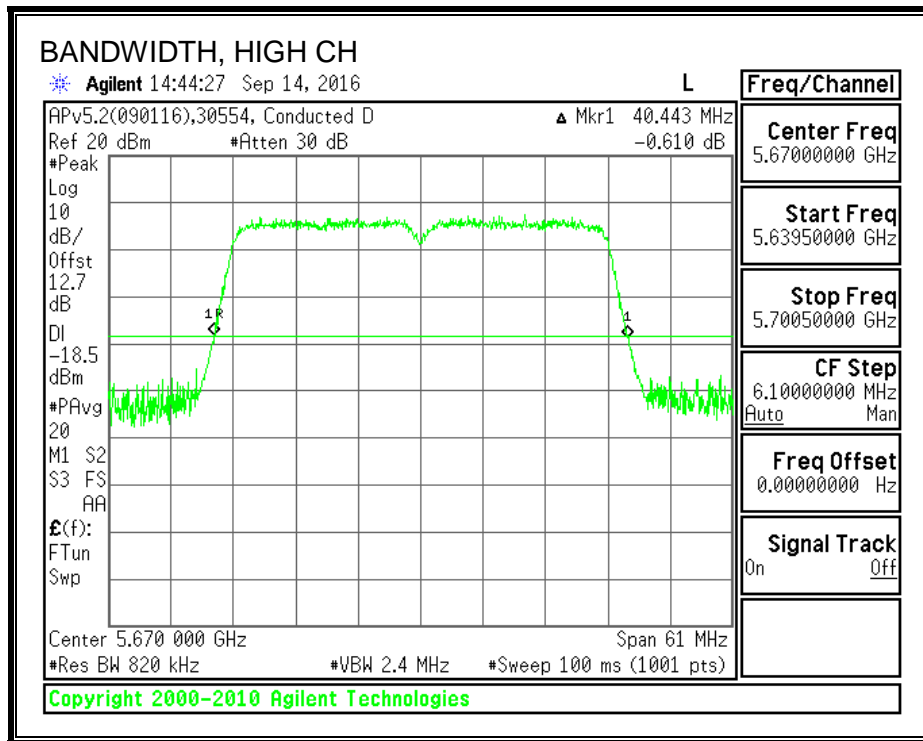

26 dB BANDWIDTH, CHAIN 2

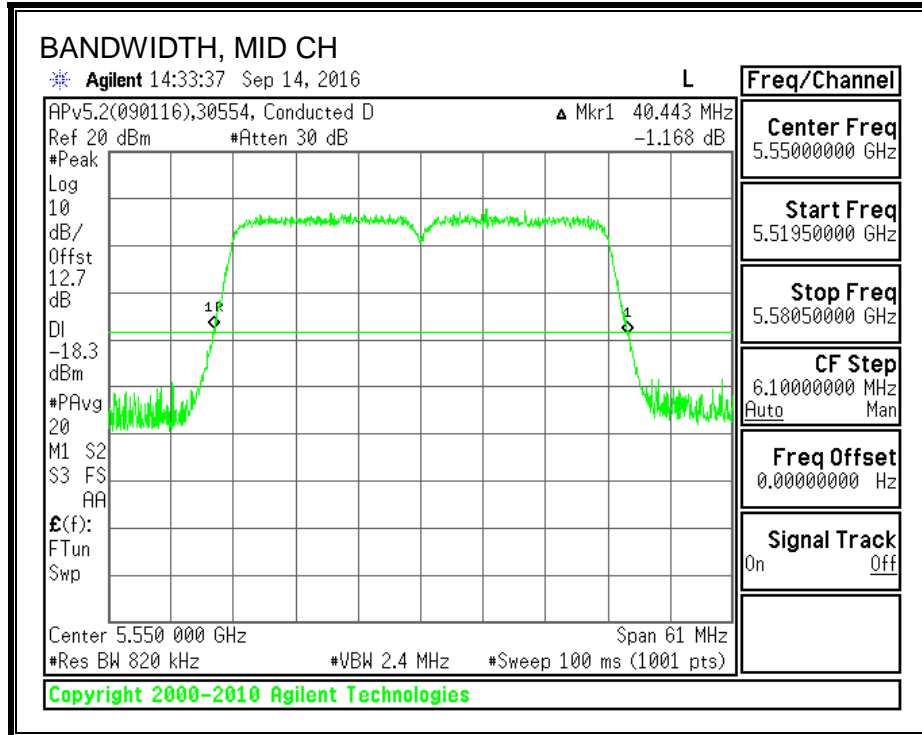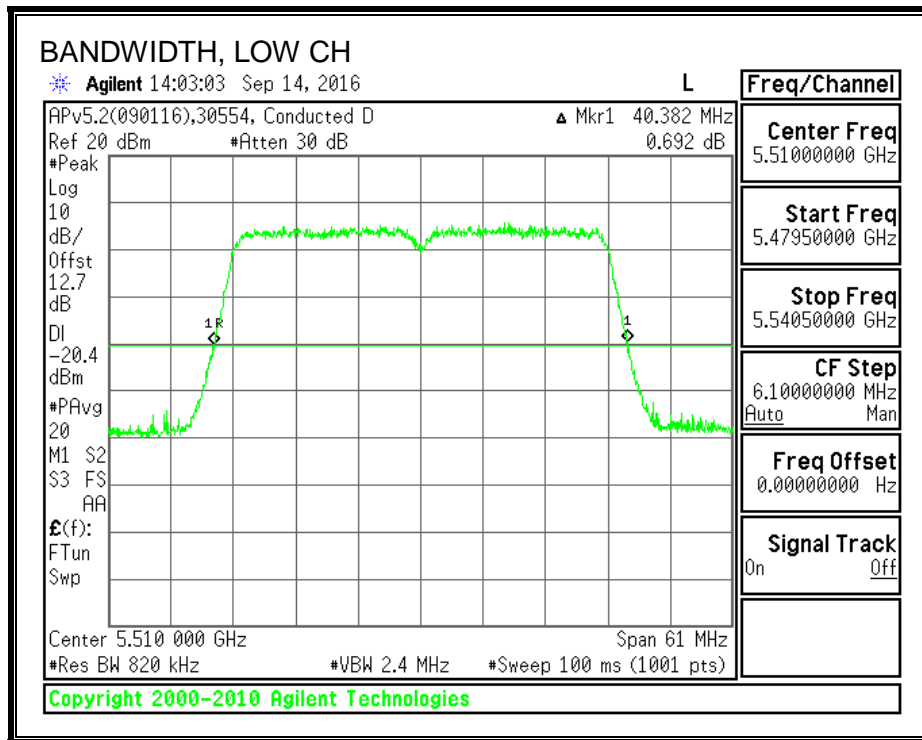

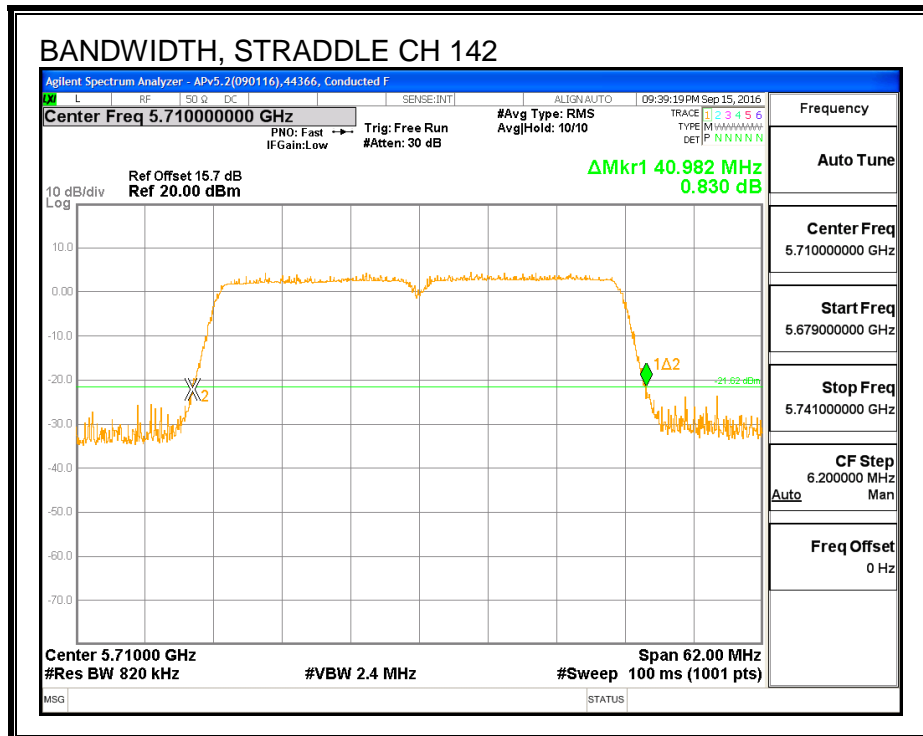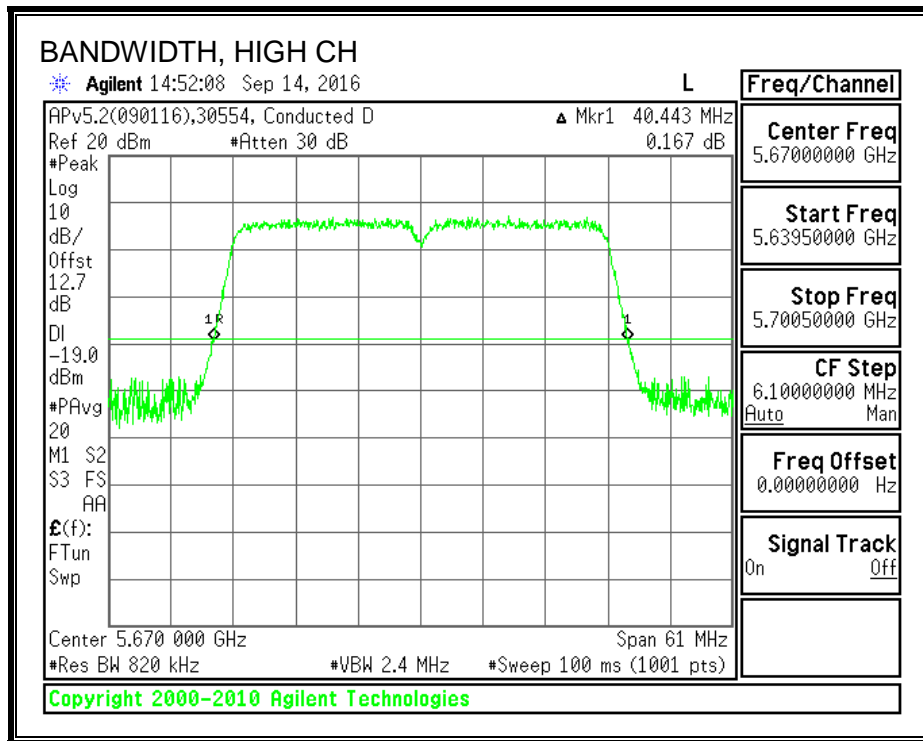

8.79.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5510	36.309	36.390
Mid	5550	36.389	36.222
High	5670	36.372	36.357
142	5710	36.362	35.798



99% BANDWIDTH, CHAIN 1

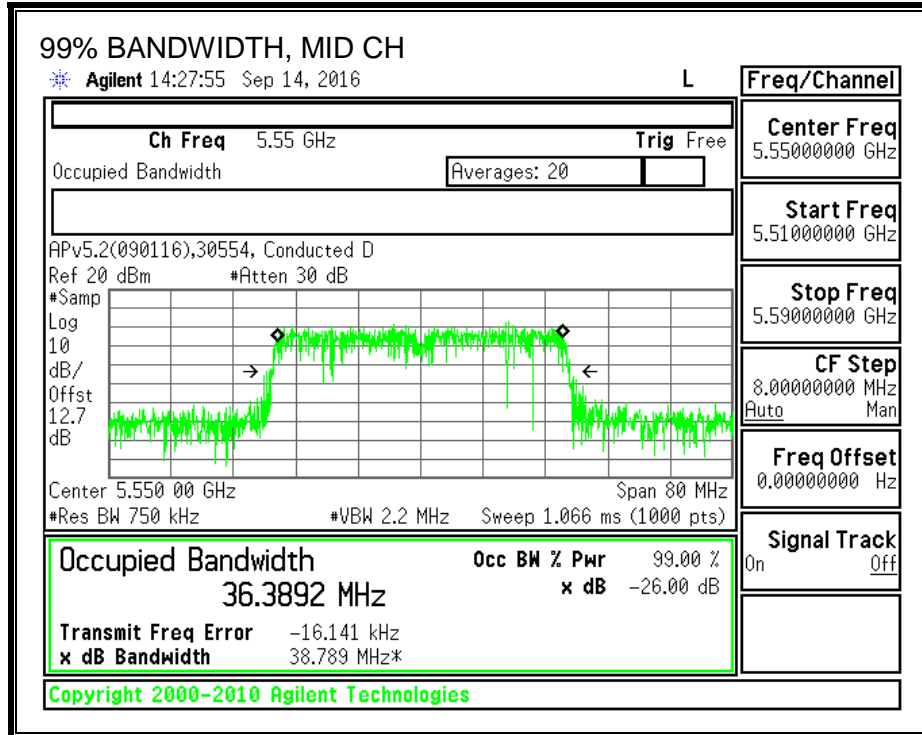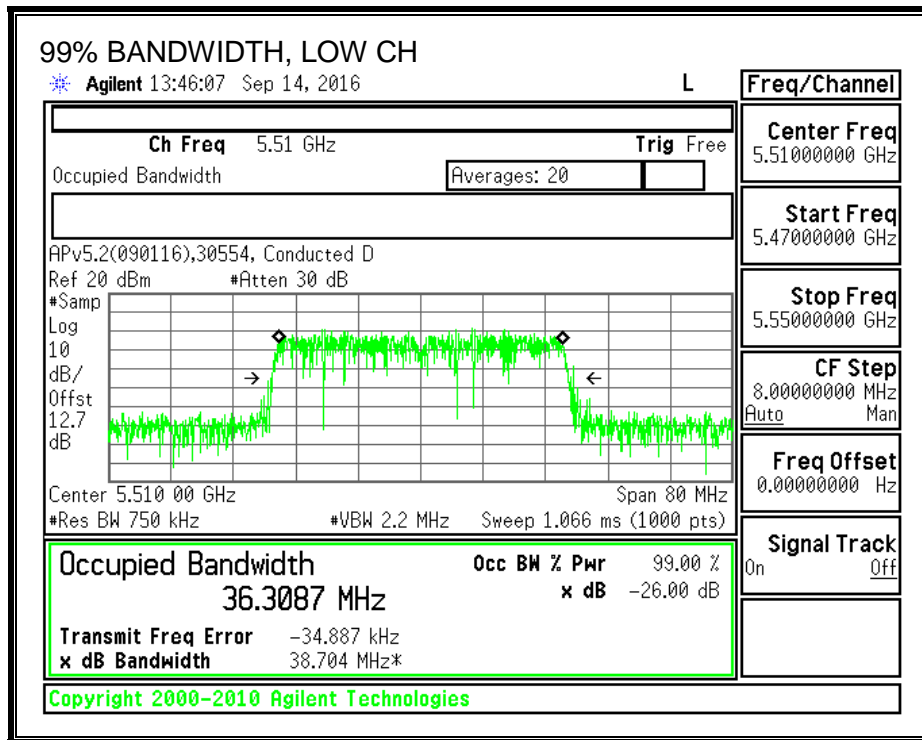

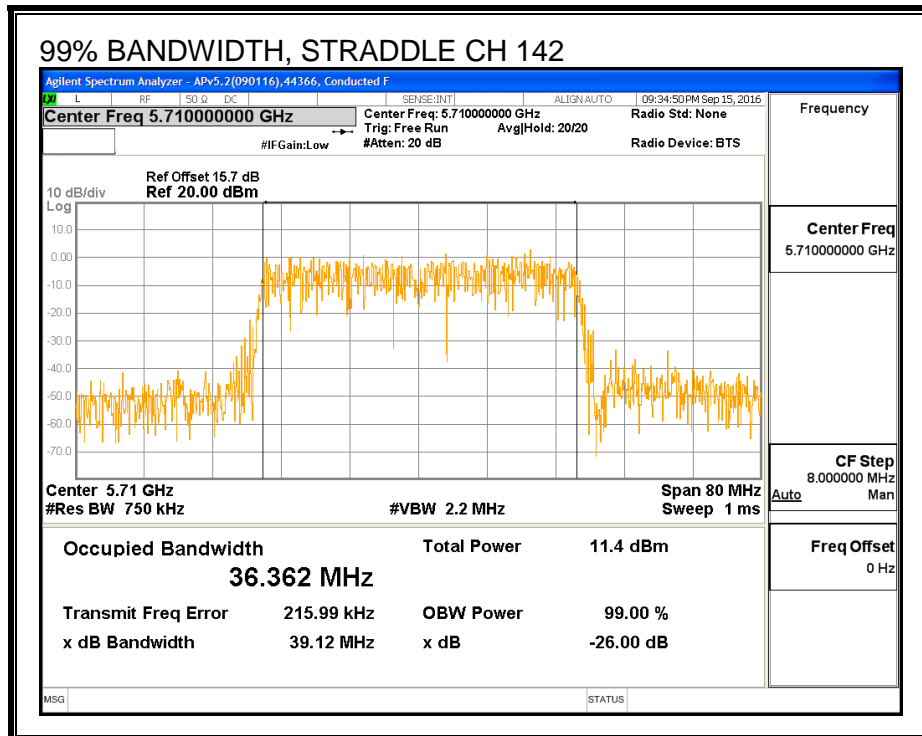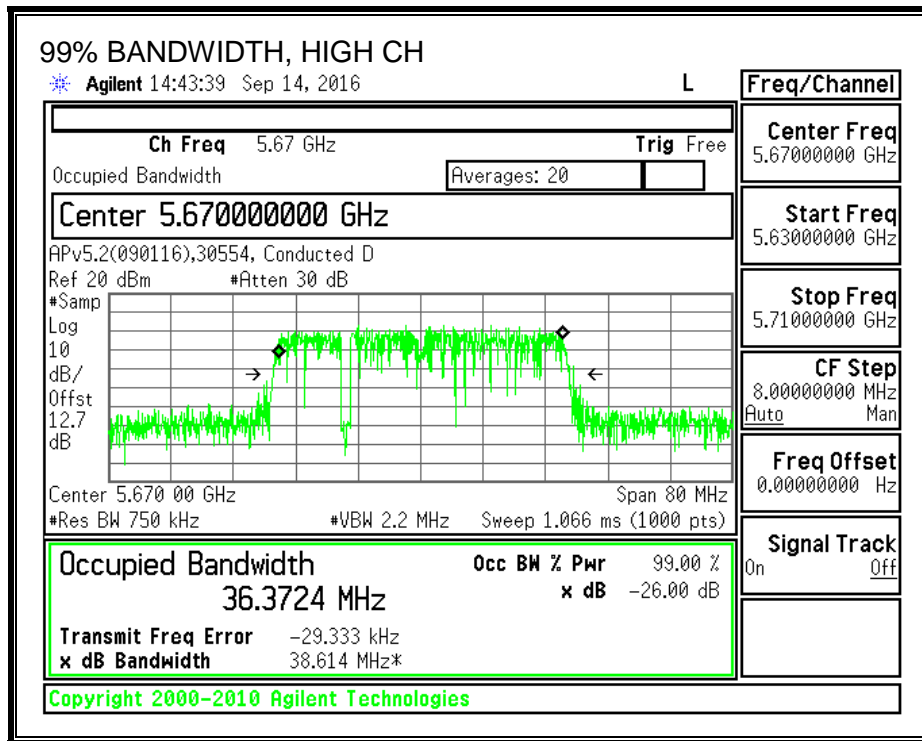

99% BANDWIDTH, CHAIN 2

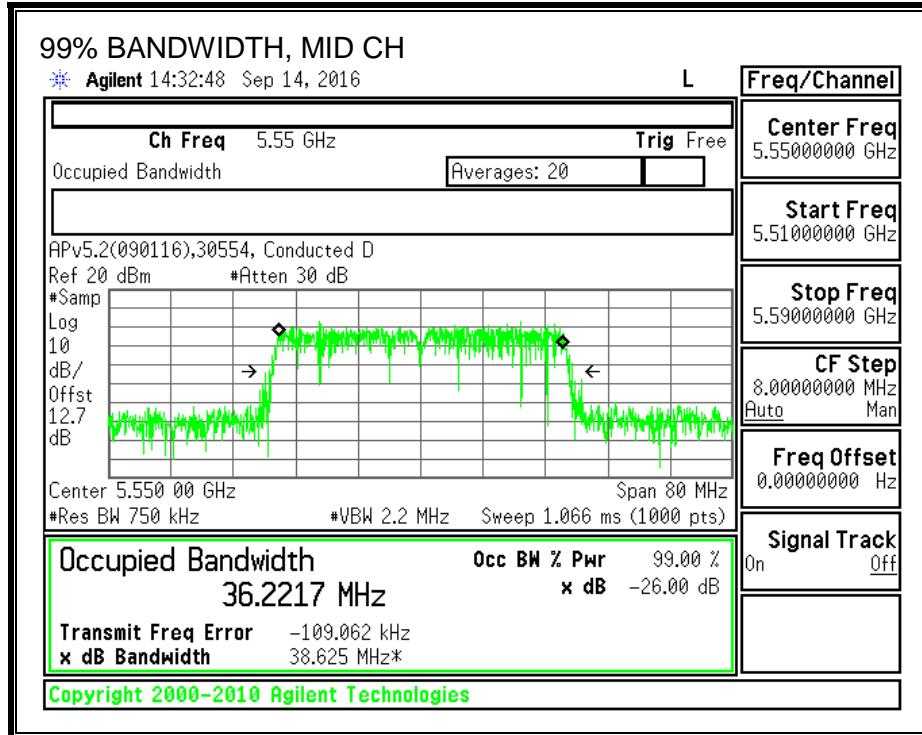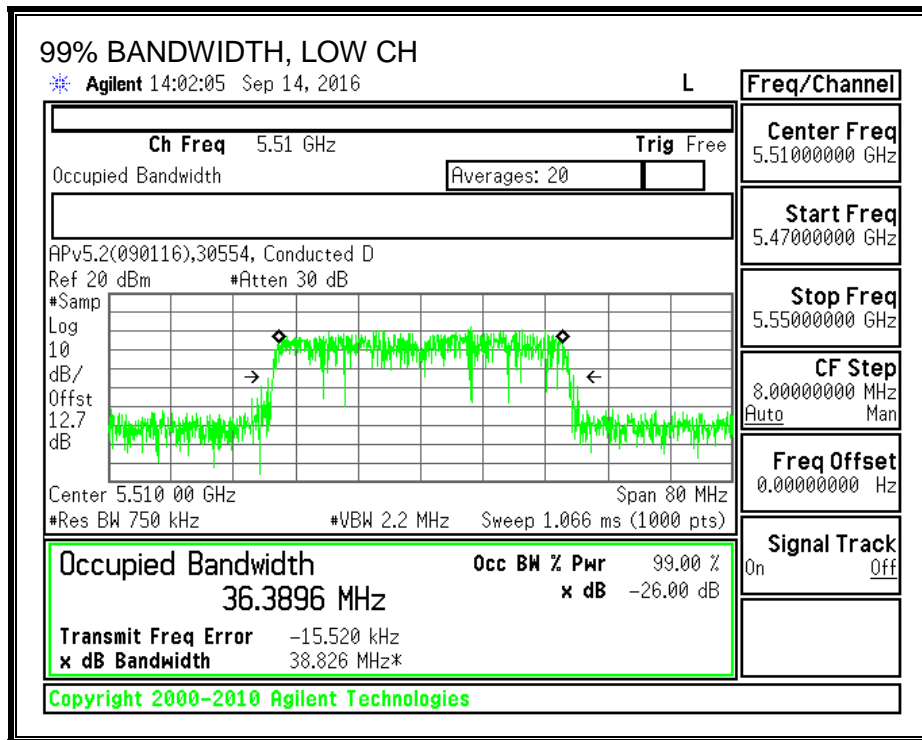

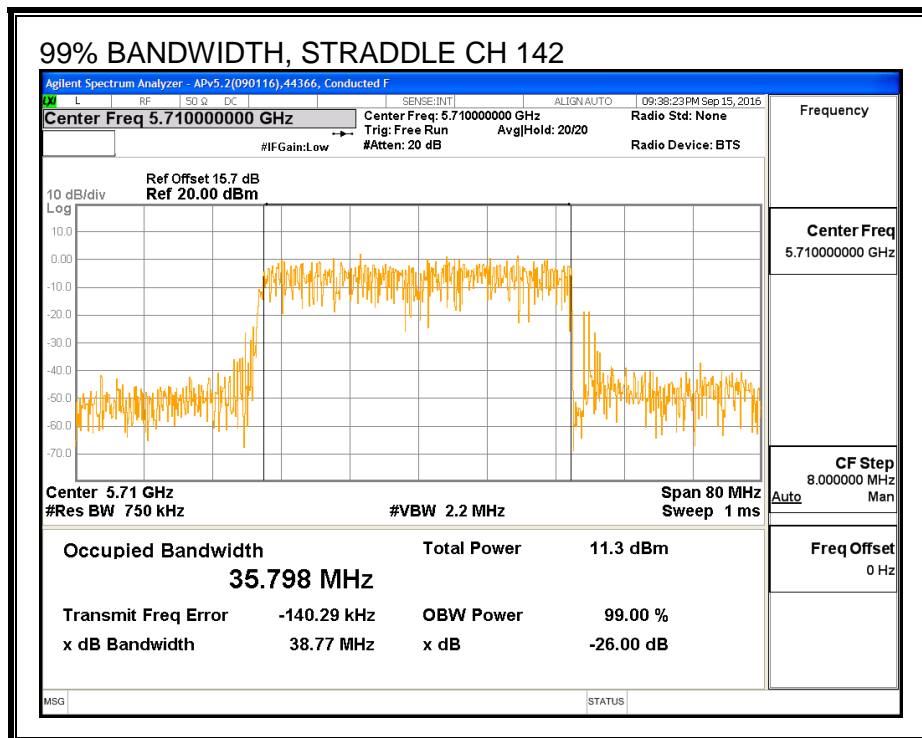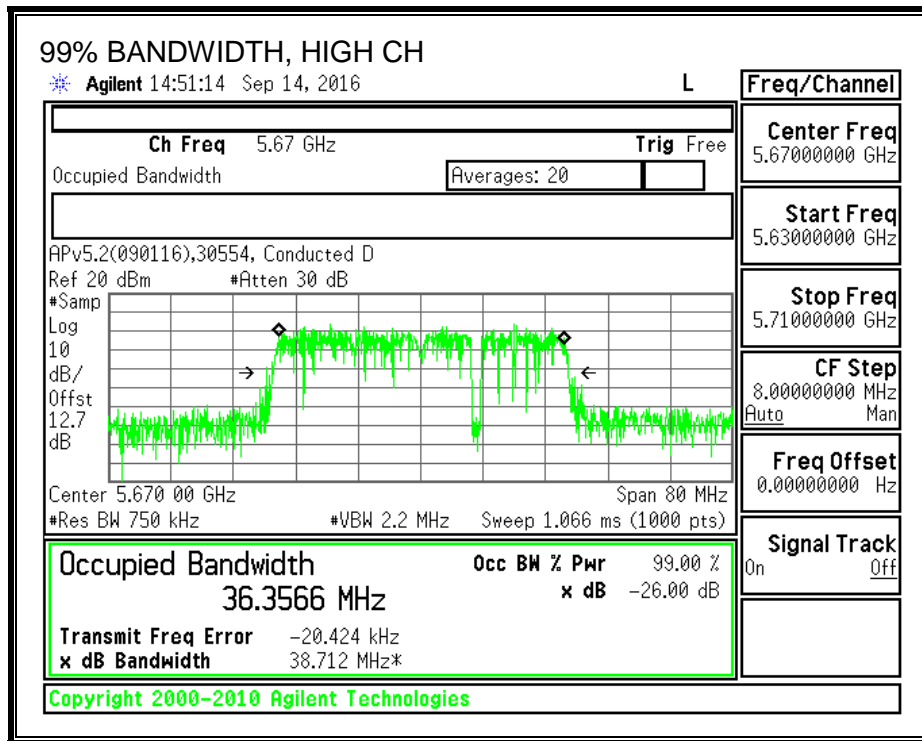

8.79.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	44366	Date:	9/12/16
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5510	11.00	10.89	13.96
Mid	5550	12.22	12.24	15.24
High	5670	12.23	12.24	15.25
142	5710	12.17	12.16	15.18

8.79.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.40	5.20	9.38

RESULTS

ID:	44366	Date:	9/12/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.32	36.31	9.38	9.38	23.22	7.62
Mid	5550	40.44	36.22	9.38	9.38	23.21	7.62
High	5670	40.44	36.36	9.38	9.38	23.23	7.62

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	11.00	10.89	13.96	23.22	-9.26
Mid	5550	12.22	12.24	15.24	23.21	-7.97
High	5670	12.23	12.24	15.25	23.23	-7.98

PSD Results


Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-3.387	-3.388	0.41	7.62	-7.21
Mid	5550	-1.735	-1.937	1.97	7.62	-5.65
High	5670	-1.686	-1.6	2.16	7.62	-5.46



PSD, CHAIN 1

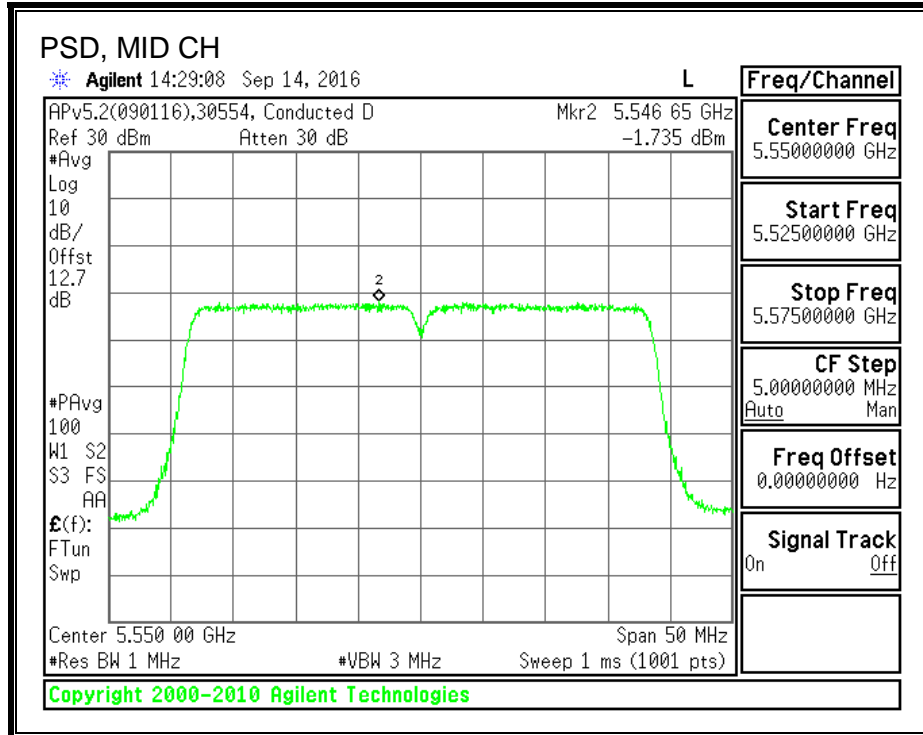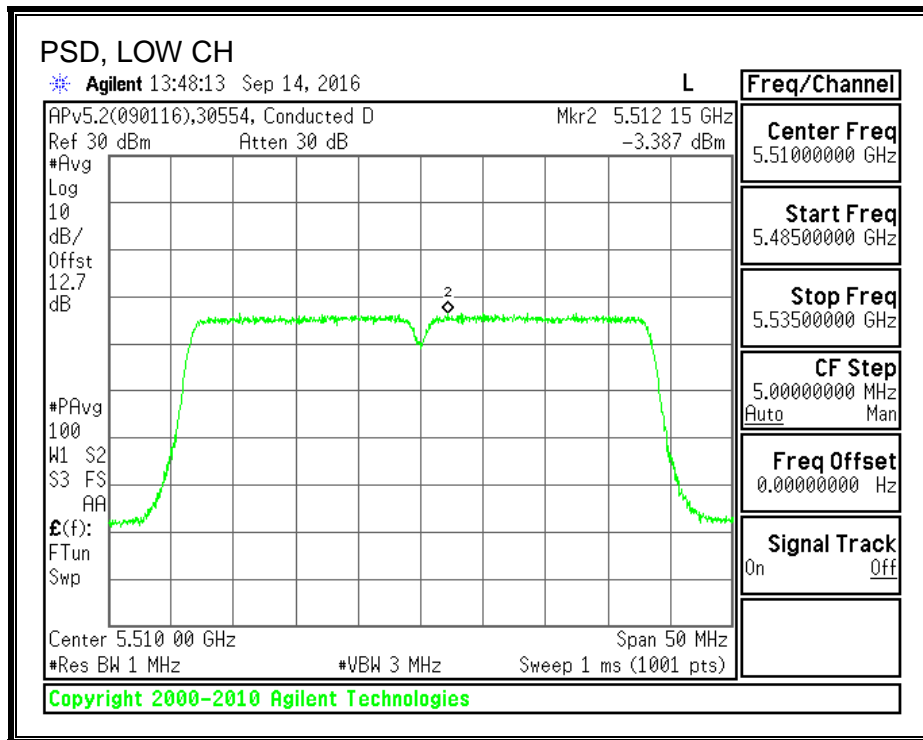

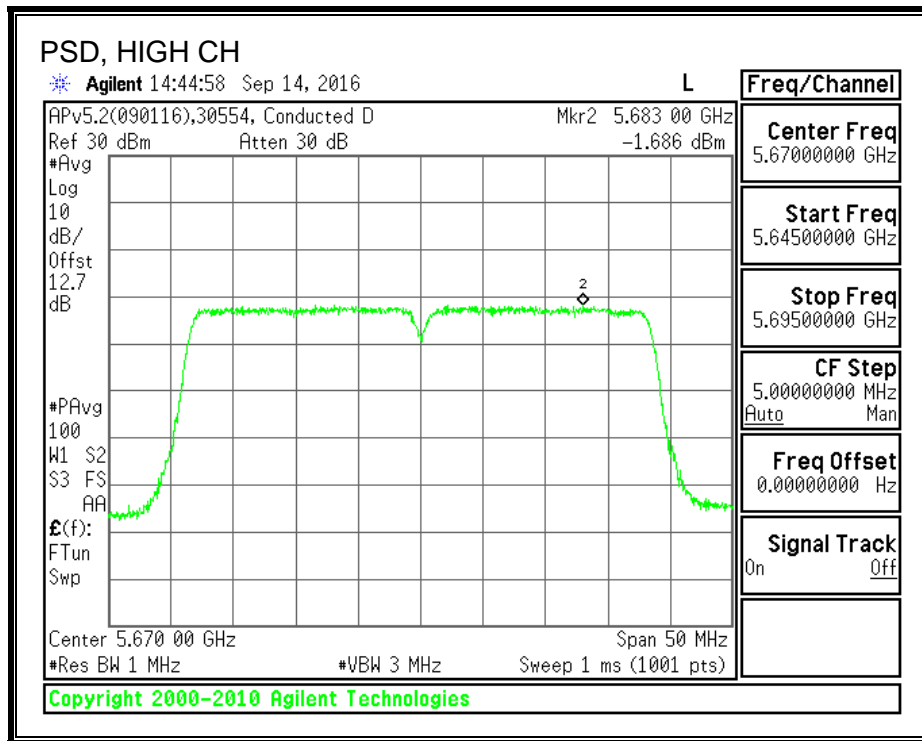

PSD, CHAIN 2

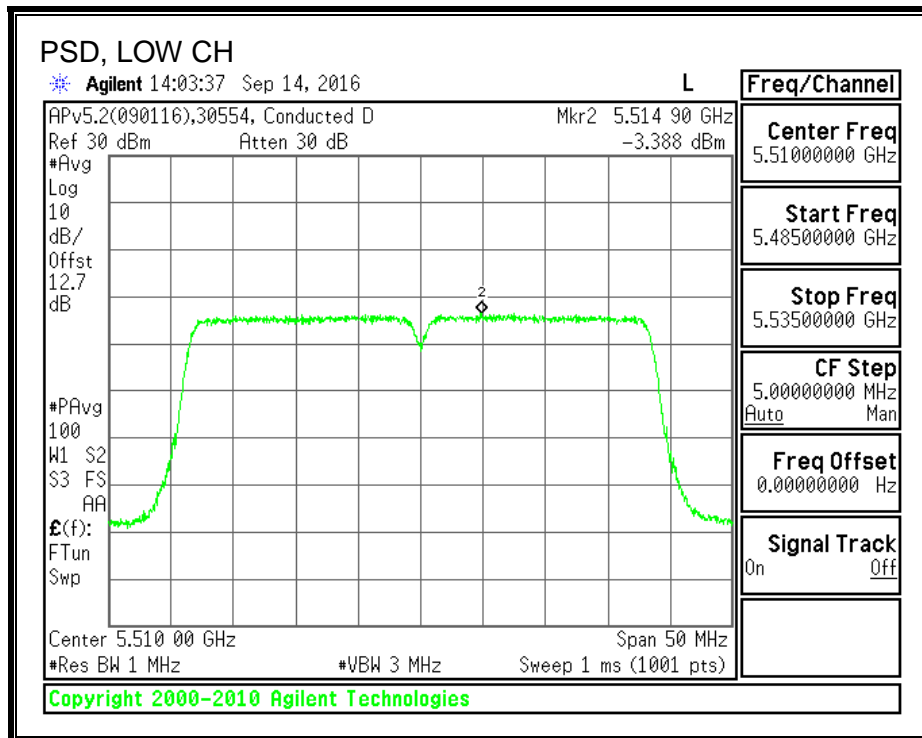

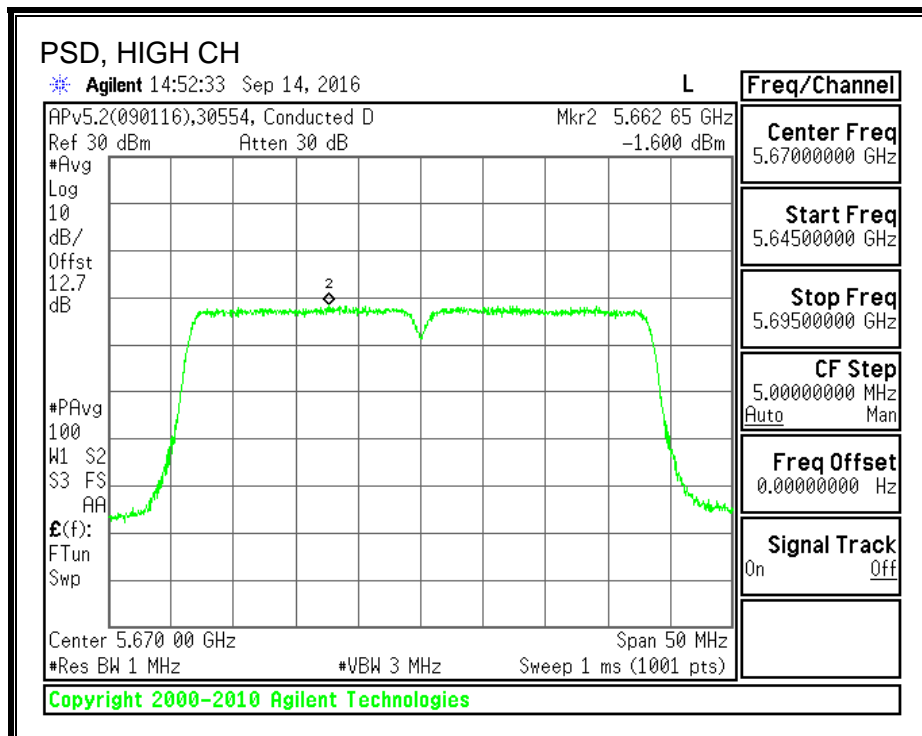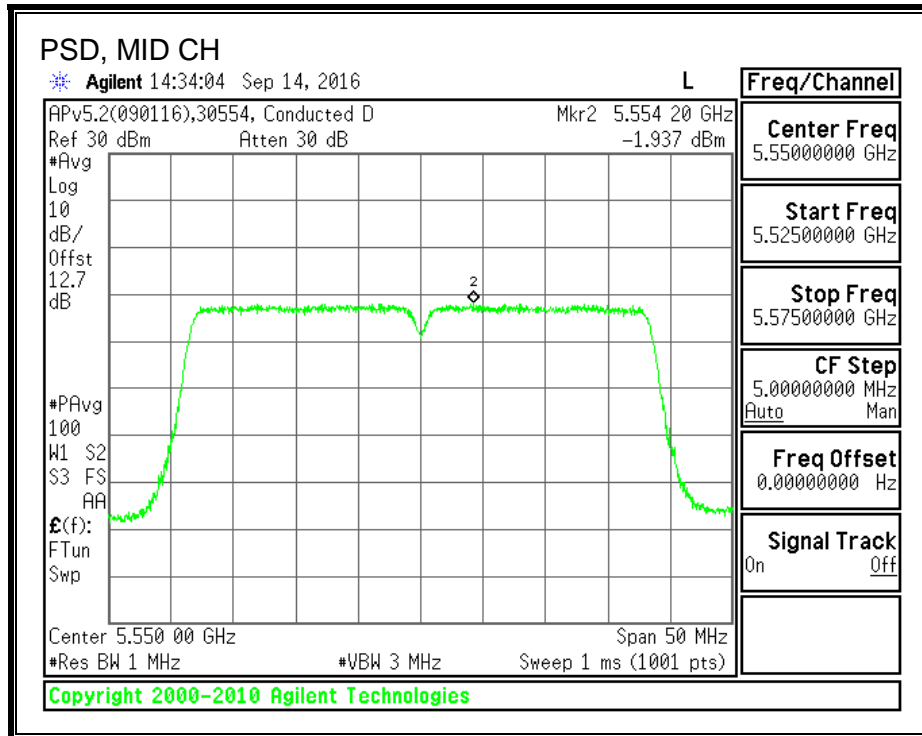

8.80. 802.11ac VHT40 2Tx (CHAIN 1 + CHAIN 2) BEAM FORMING STRADDLE CHANNEL 142 RESULTS (FCC)

8.80.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.43	9.38	9.38	20.62	7.62

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	11.67	11.66	15.47	20.62	-5.15


PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.68	-2.69	1.12	7.62	-6.50


OUTPUT POWER, CHAIN 1

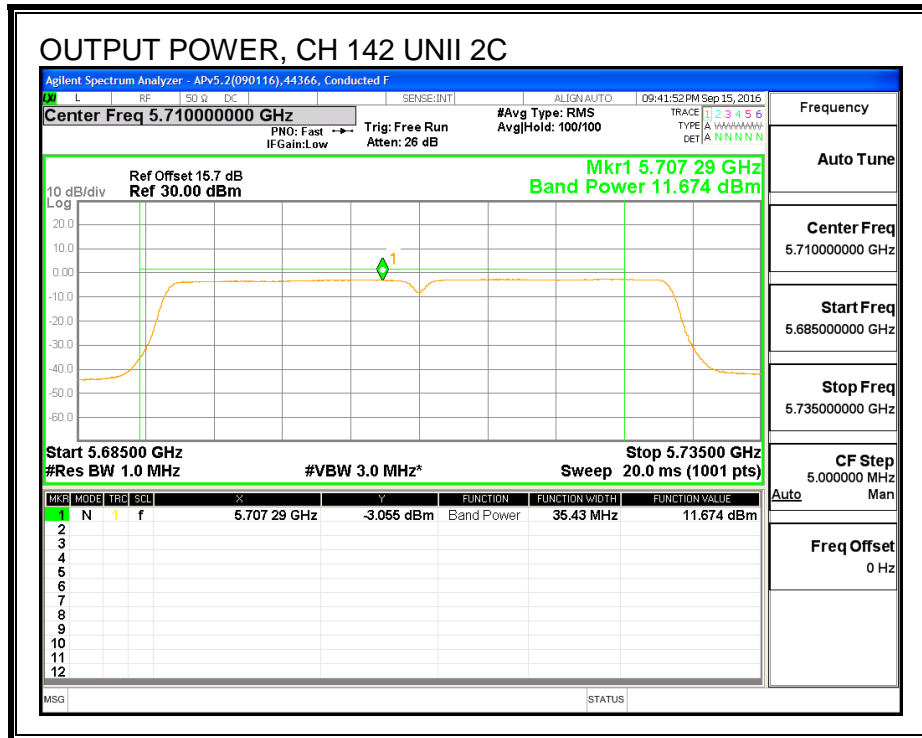


OUTPUT POWER, CHAIN 2

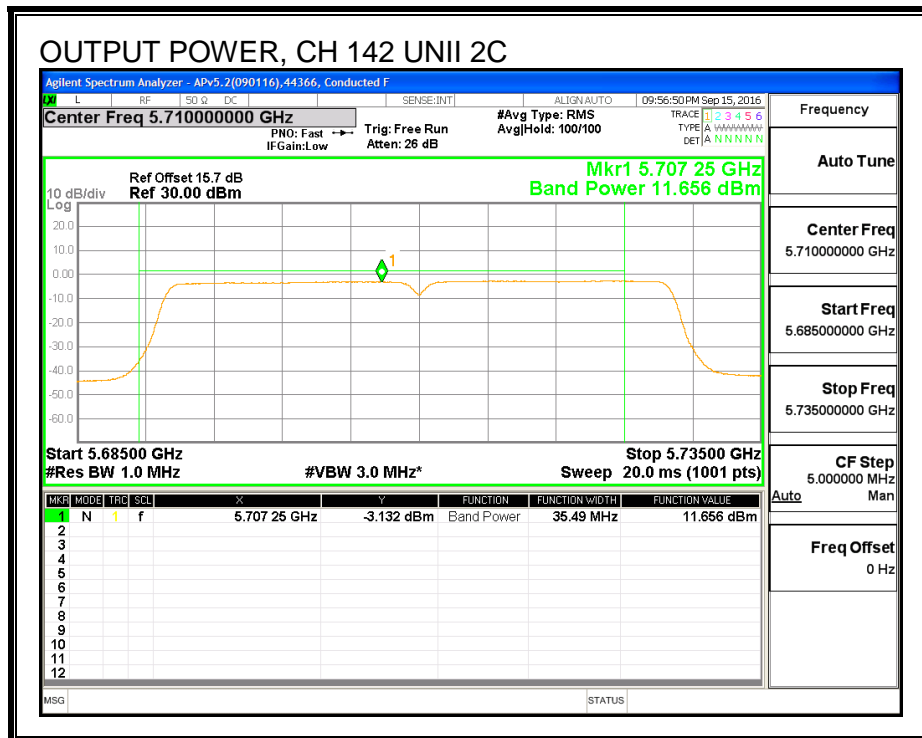

PSD, CHAIN 1

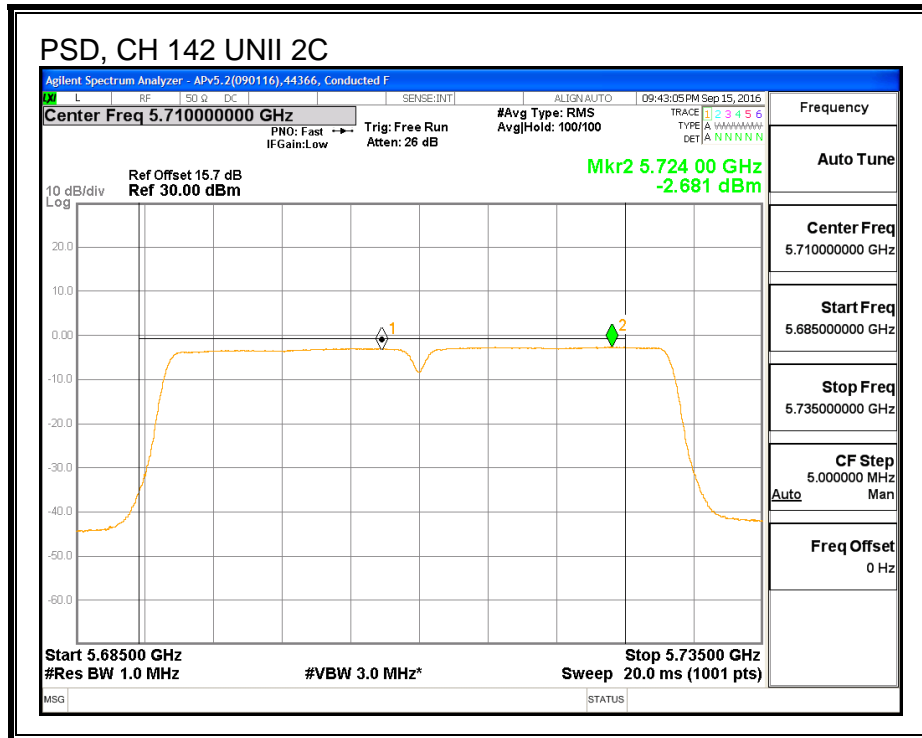

PSD, CHAIN 2

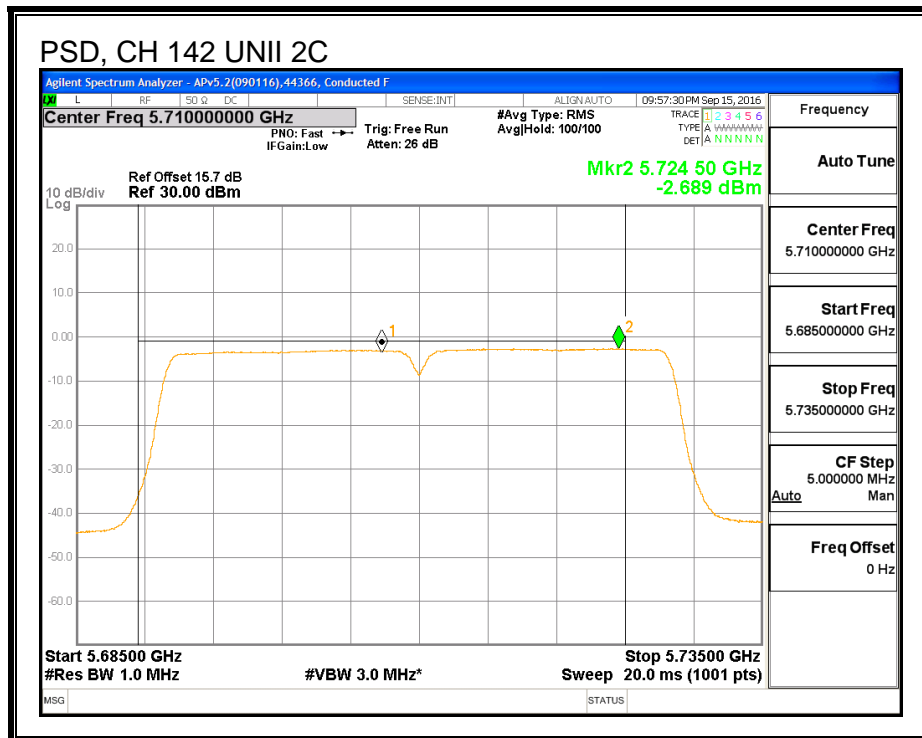

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	5.43	9.38	9.38	26.62	26.62

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	2.03	1.99	5.81	26.62	-20.81


PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.58	-5.63	-1.80	26.62	-28.42


OUTPUT POWER, CHAIN 1

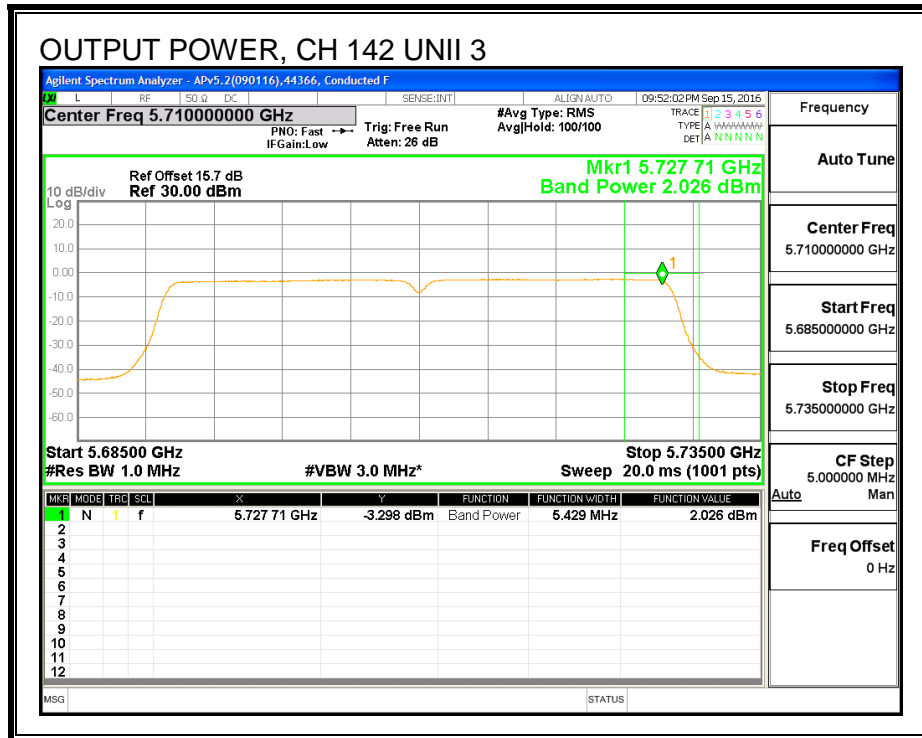


OUTPUT POWER, CHAIN 2

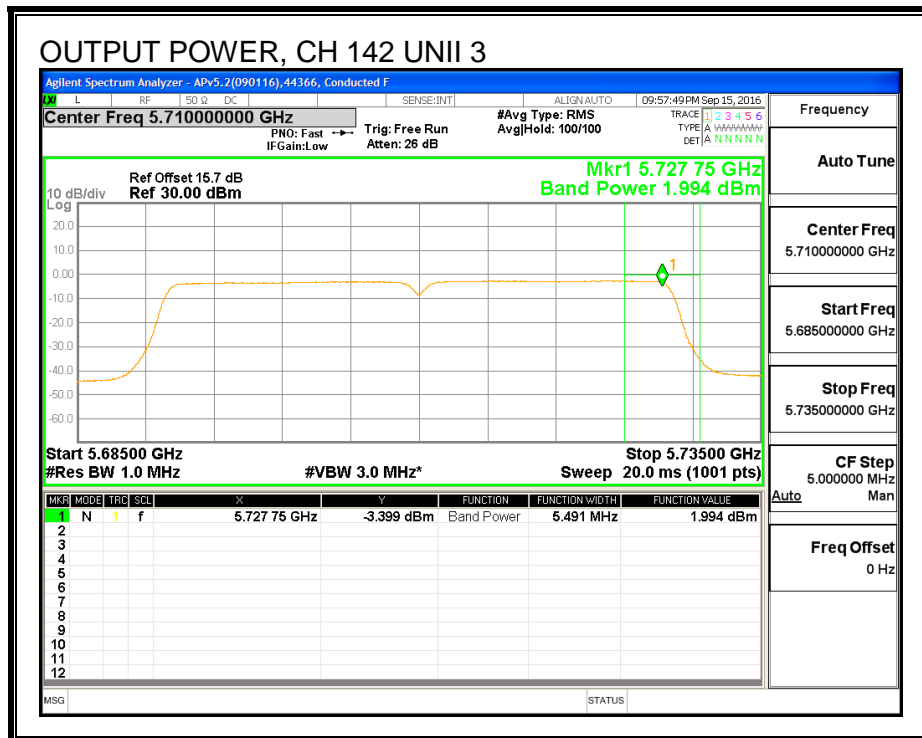

PSD, CHAIN 1

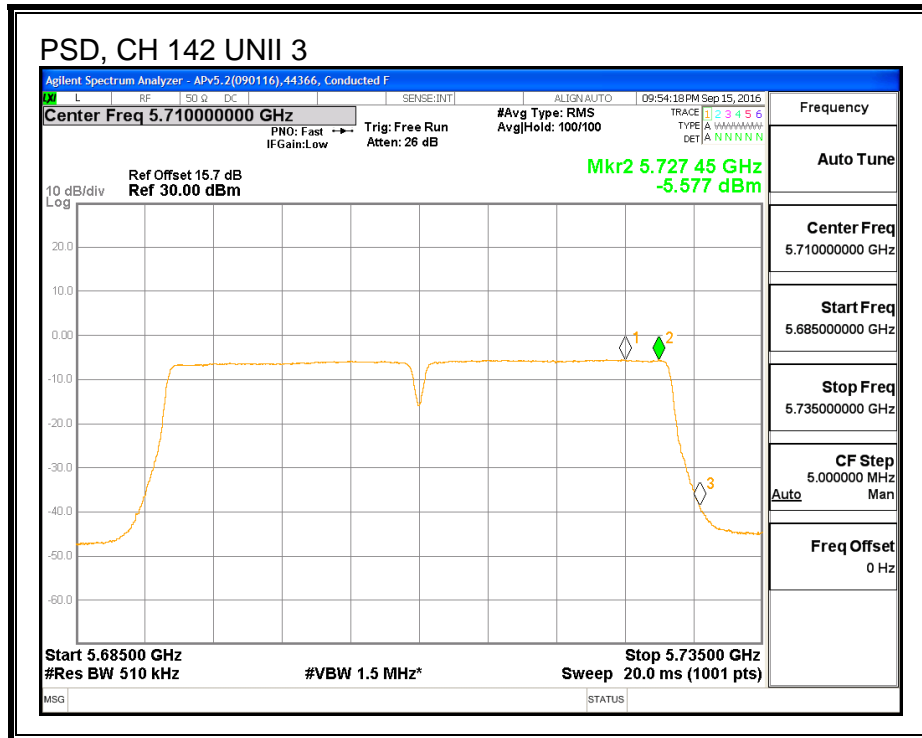

PSD, CHAIN 2

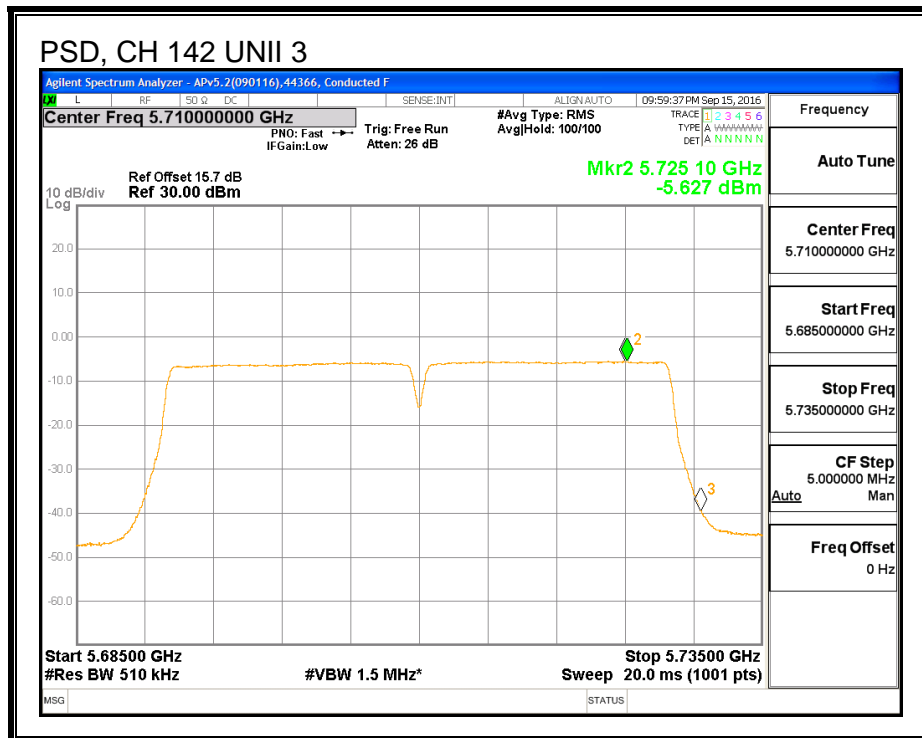

8.81. 802.11ac VHT40 2Tx (CHAIN 1 + CHAIN 2) BEAM FORMING STRADDLE CHANNEL 142 RESULTS (IC)

8.81.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	32.900	9.38	9.38	20.62	7.62

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	11.65	11.60	15.43	20.62	-5.19


PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.68	-2.69	1.12	7.62	-6.50


OUTPUT POWER, CHAIN 1

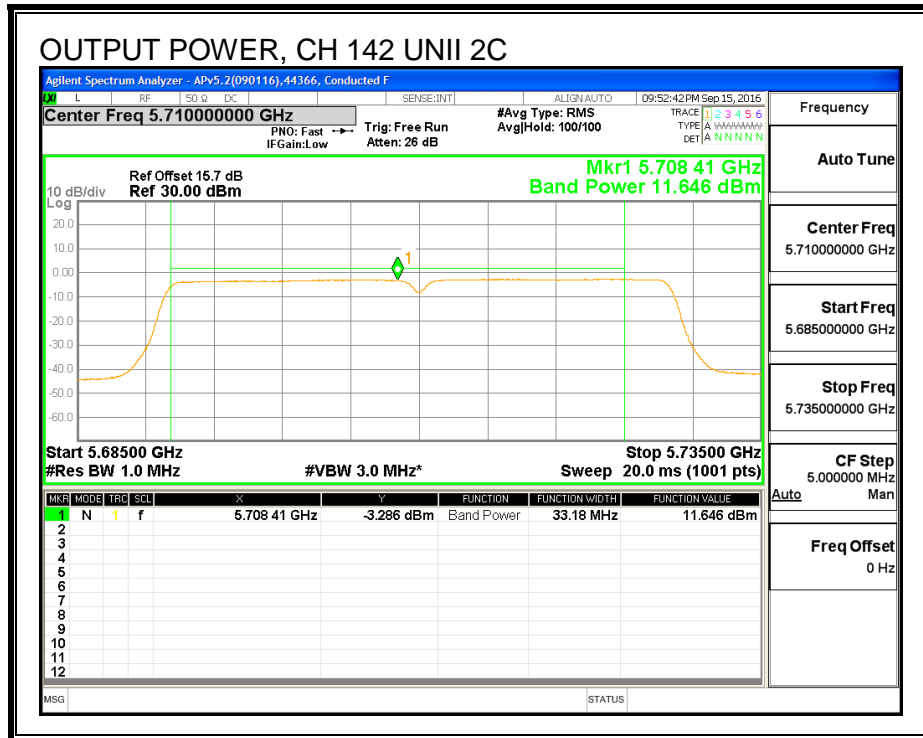


OUTPUT POWER, CHAIN 2

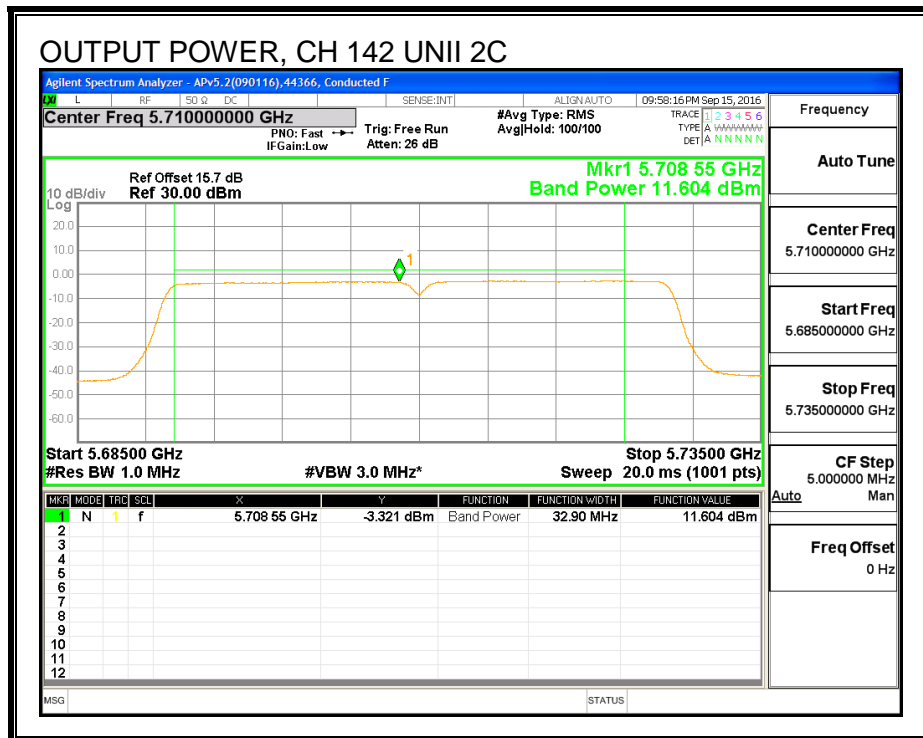

PSD, CHAIN 1

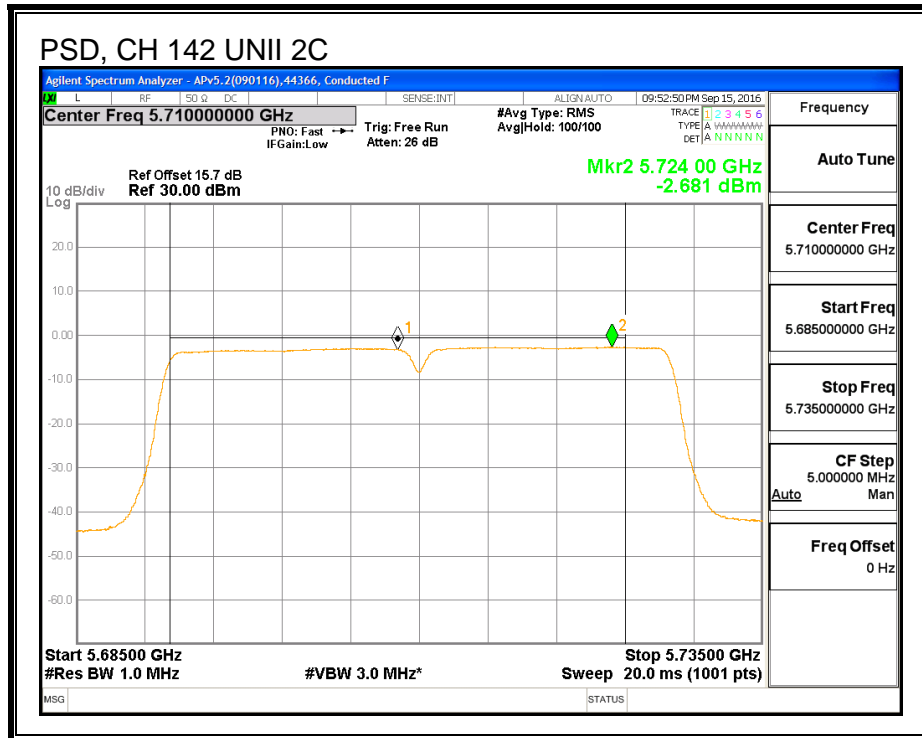

PSD, CHAIN 2

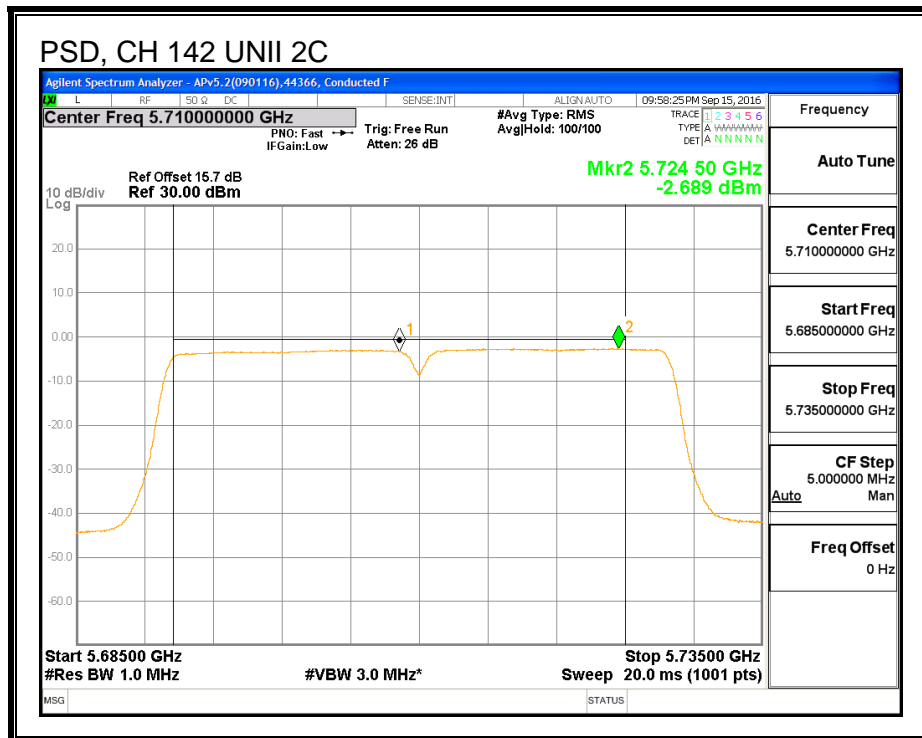

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	2.899	9.38	9.38	26.62	26.62

Duty Cycle CF (dB)	0.79	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.72	1.39	5.36	26.62	-21.26


PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.58	-5.63	-1.80	26.62	-28.42


OUTPUT POWER, CHAIN 1

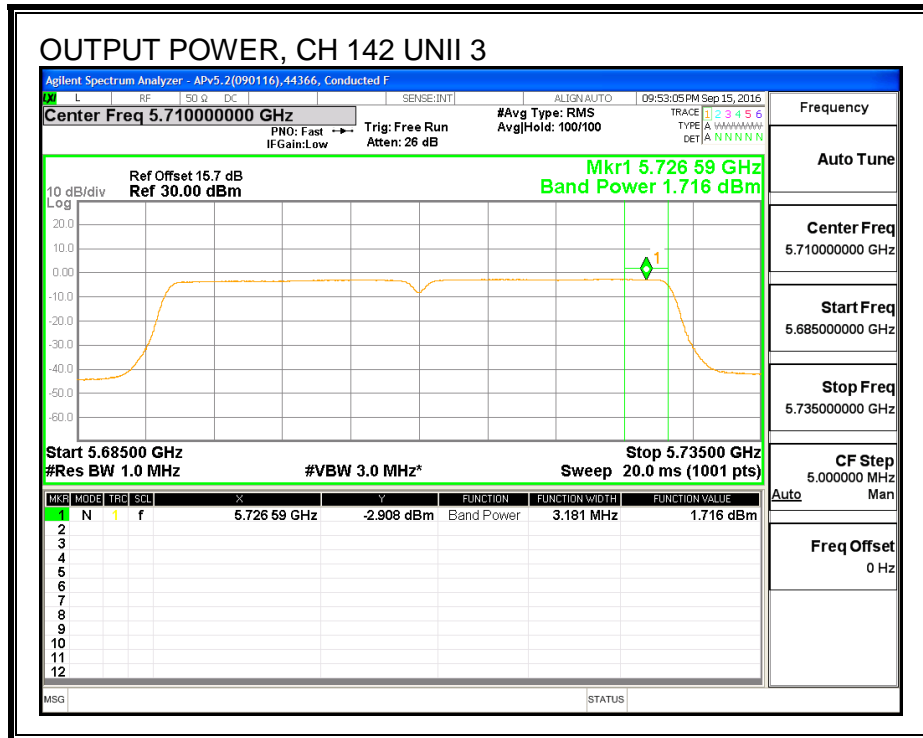


OUTPUT POWER, CHAIN 2

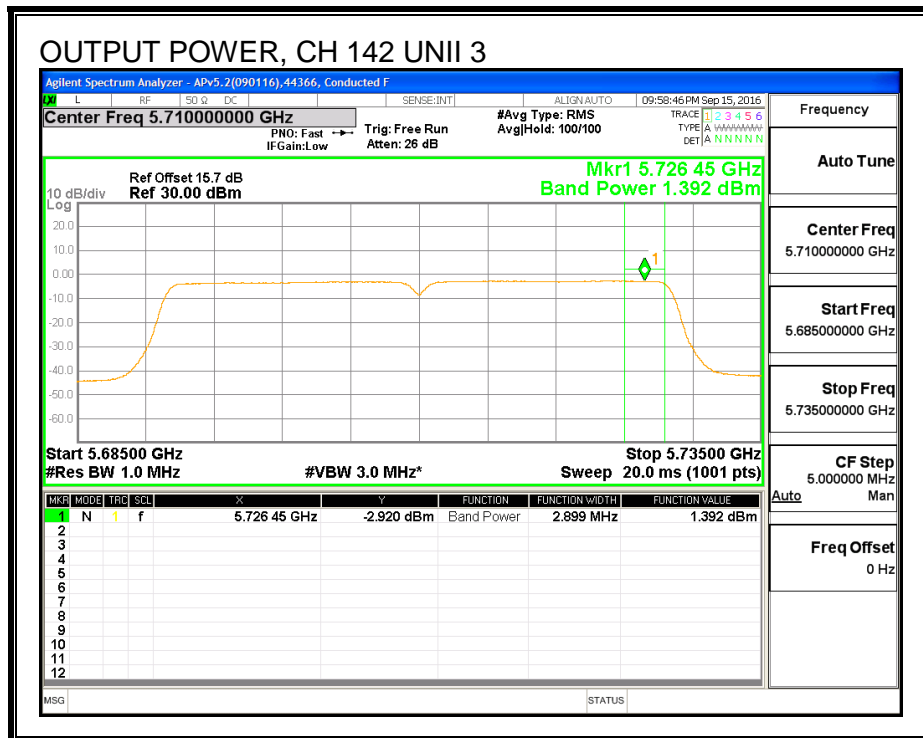

PSD, CHAIN 1

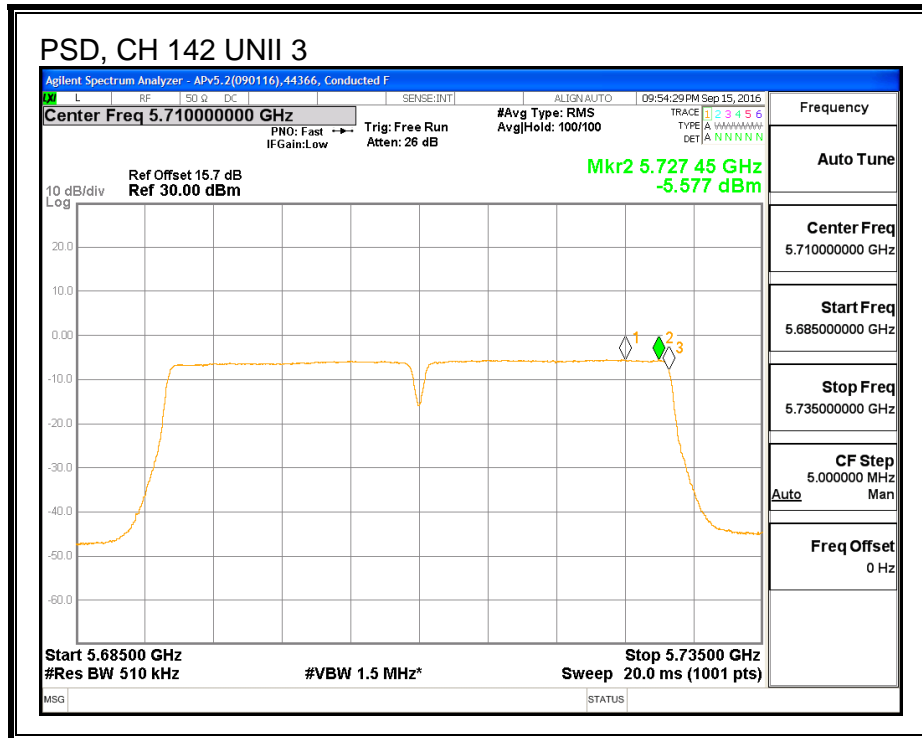

PSD, CHAIN 2

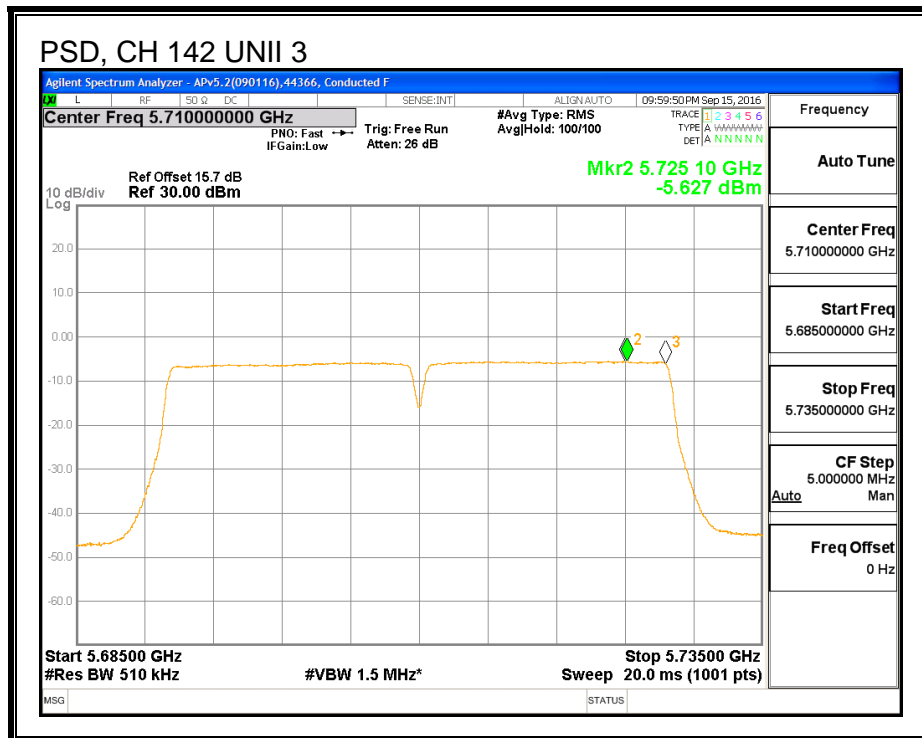

8.81.2. 6 dB BBANDWIDTH

LIMITS

FCC §15.407 (e)


IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 1 (MHz)	6 dB BW Chain 2 (MHz)
142	5710	3.240	6.985

CHAIN 1

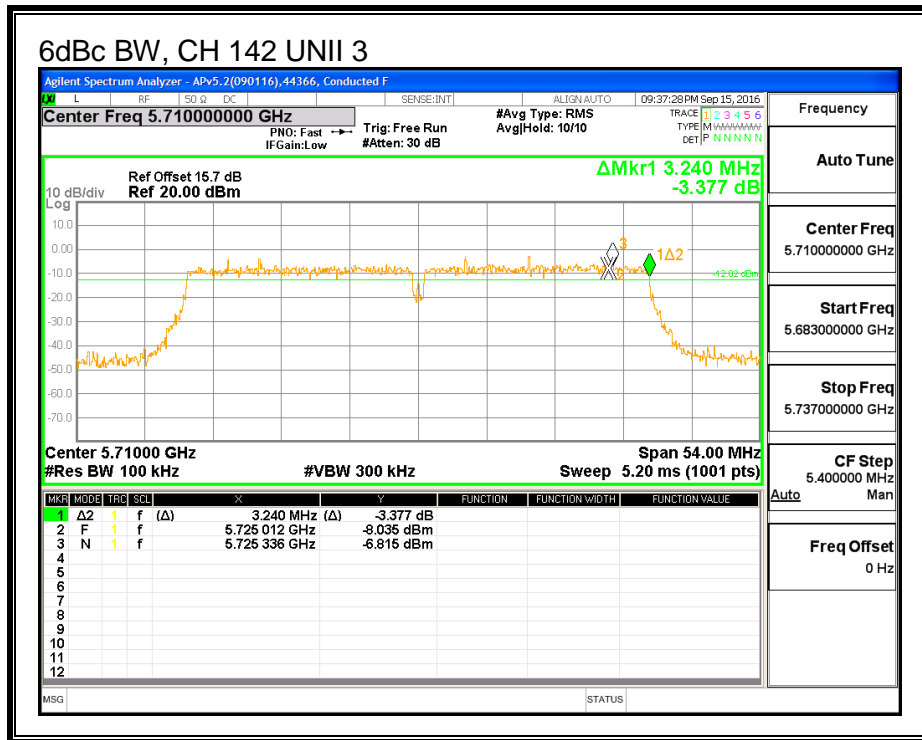

CHAIN 2

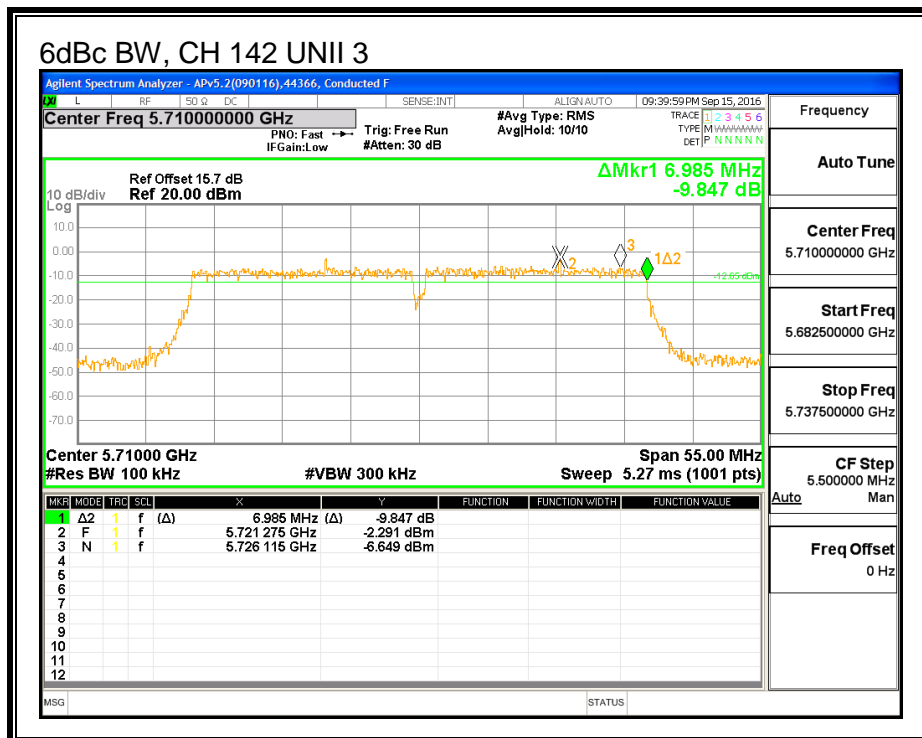

8.82. 802.11n HT40 3Tx CDD MODE IN THE 5.6 GHz BAND

8.82.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5510	40.982	40.920	40.920
Mid	5550	40.565	40.982	40.982
High	5670	40.672	40.796	40.796
142	5710	40.734	40.796	40.734



26 dB BANDWIDTH, CHAIN 0

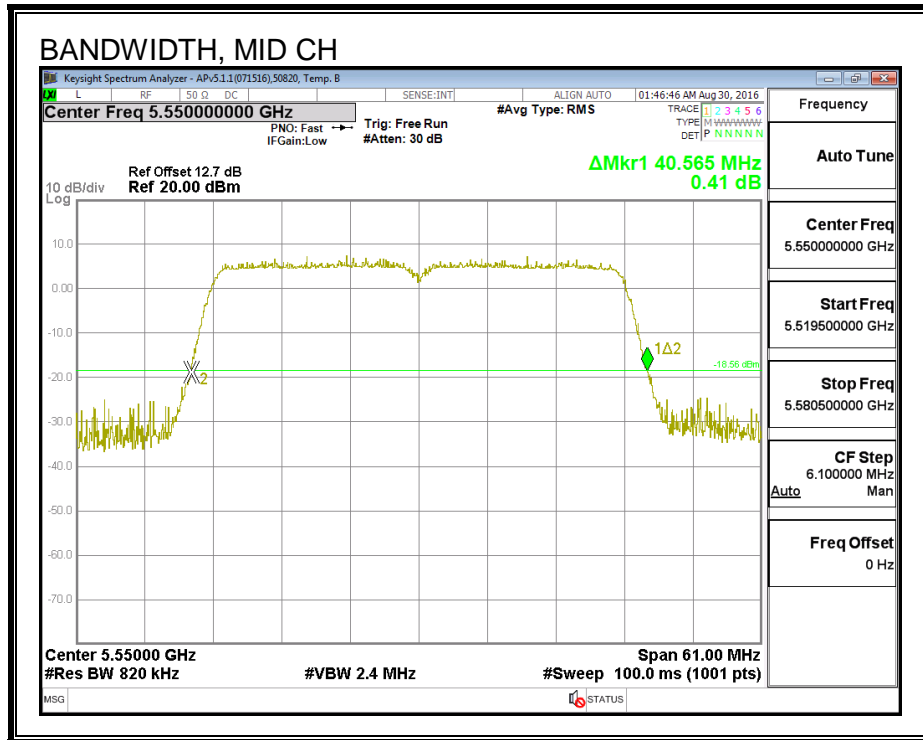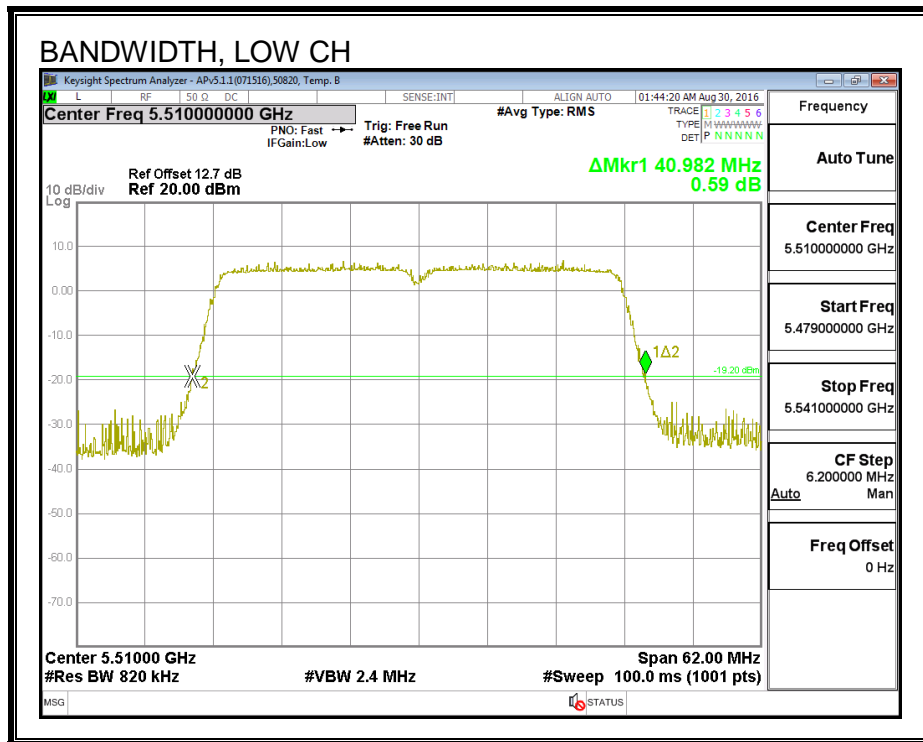

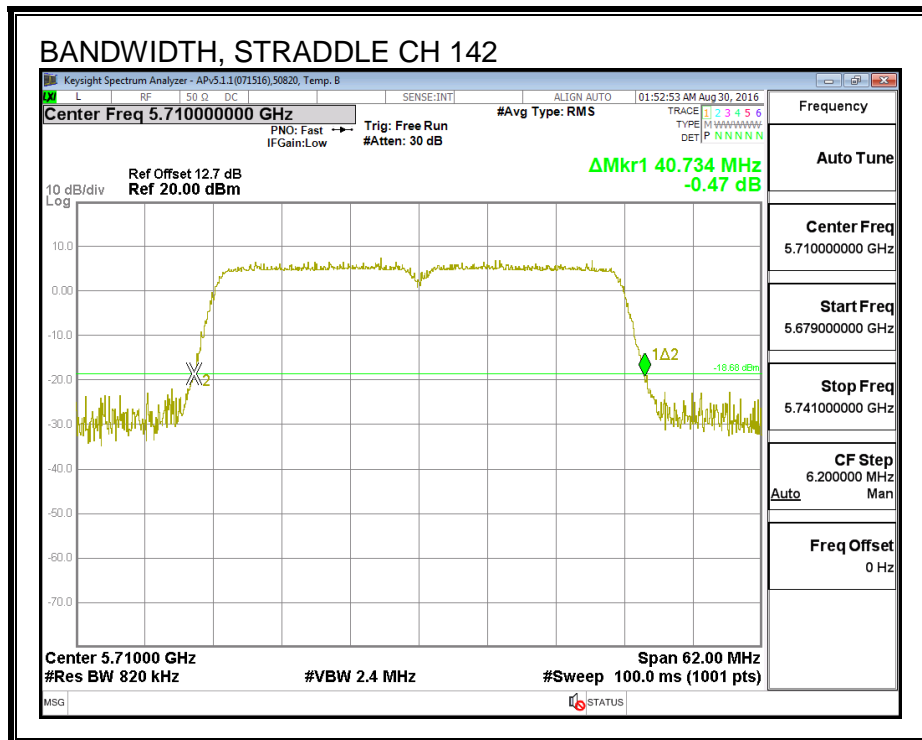
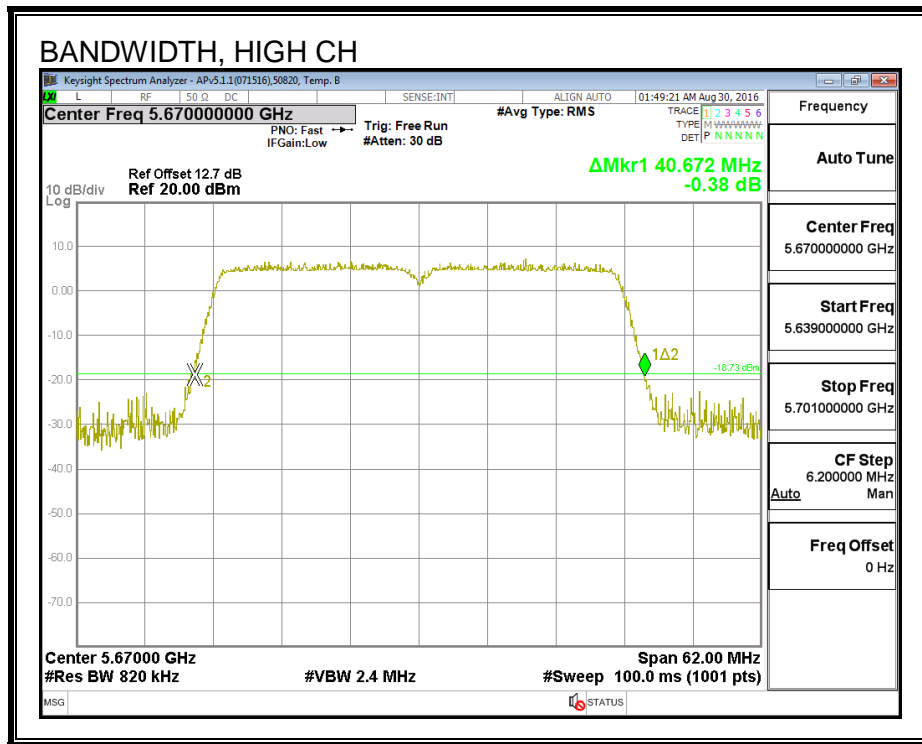




26 dB BANDWIDTH, CHAIN 1

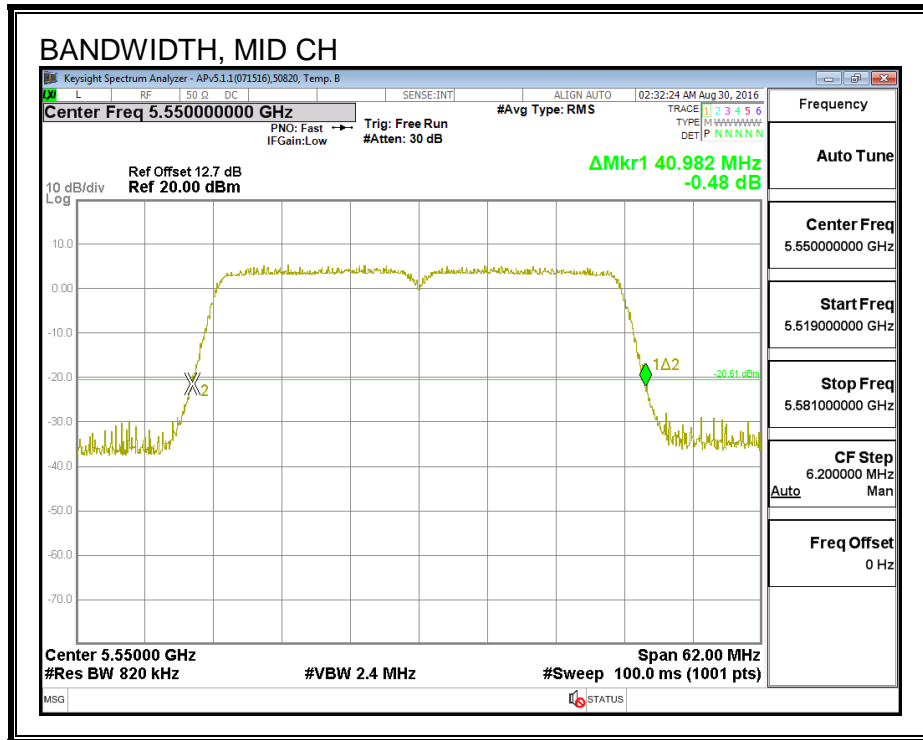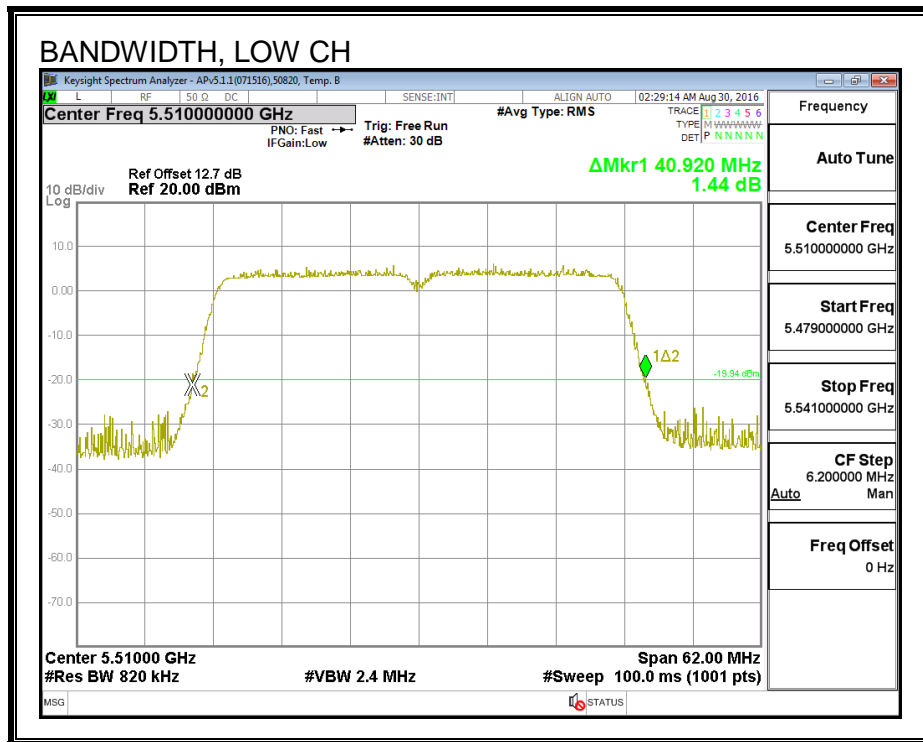

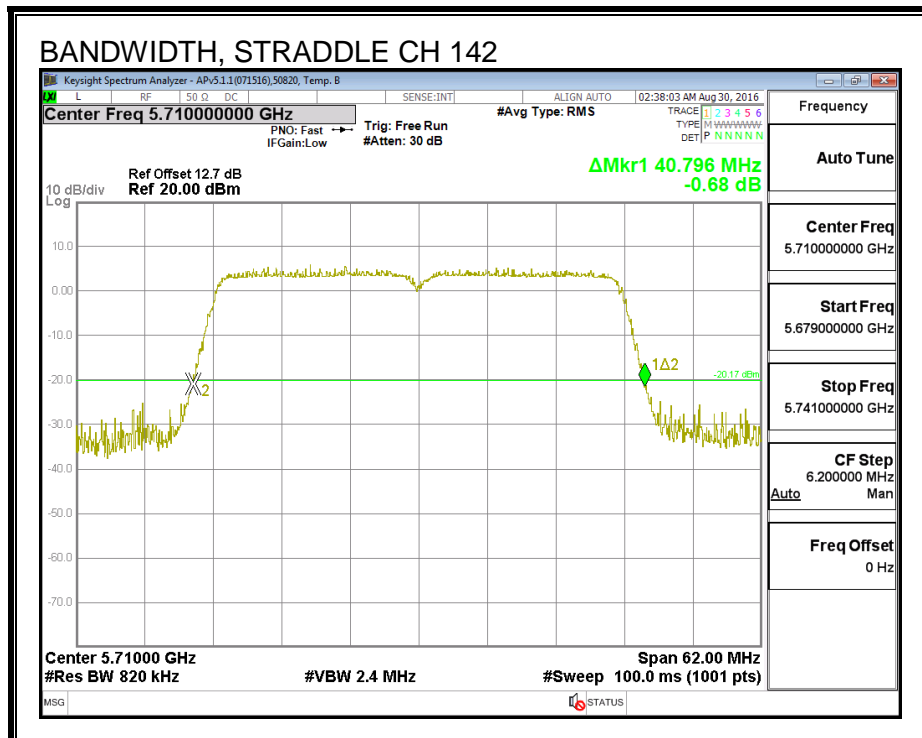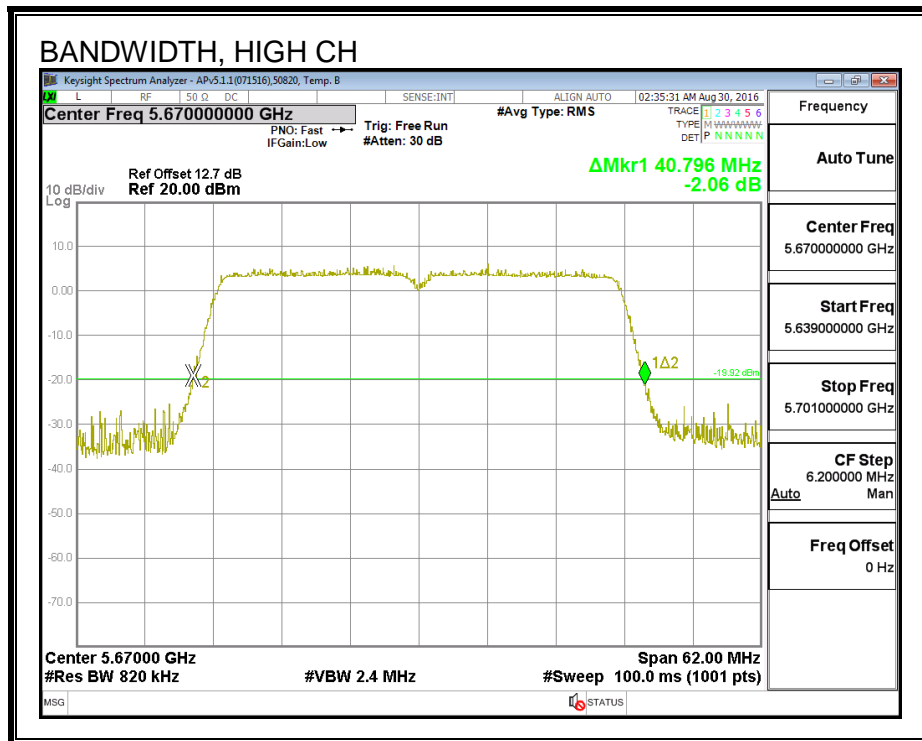

26 dB BANDWIDTH, CHAIN 2

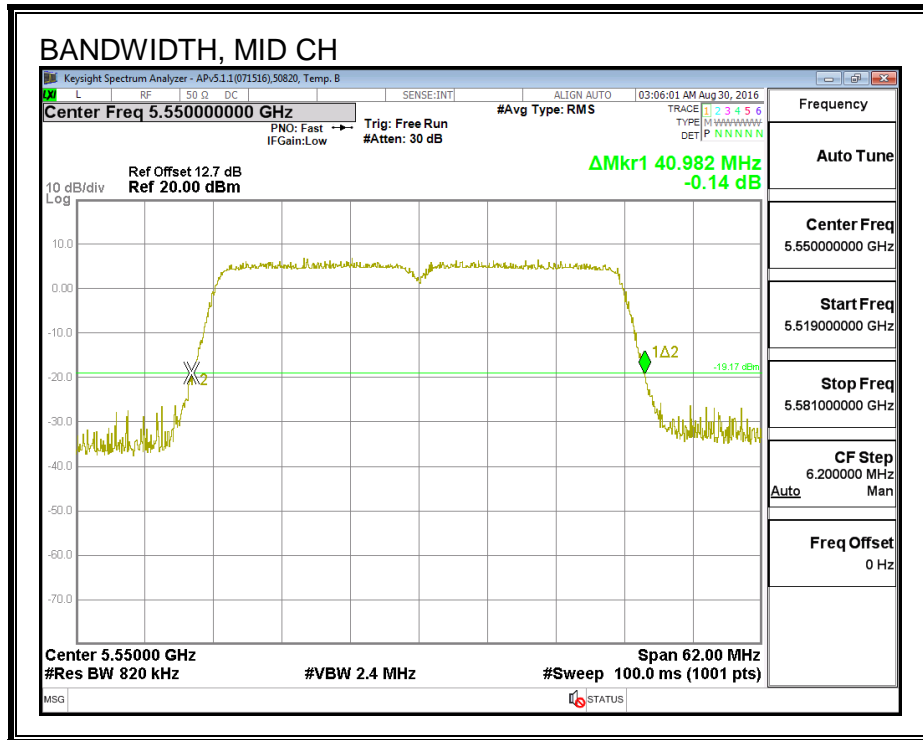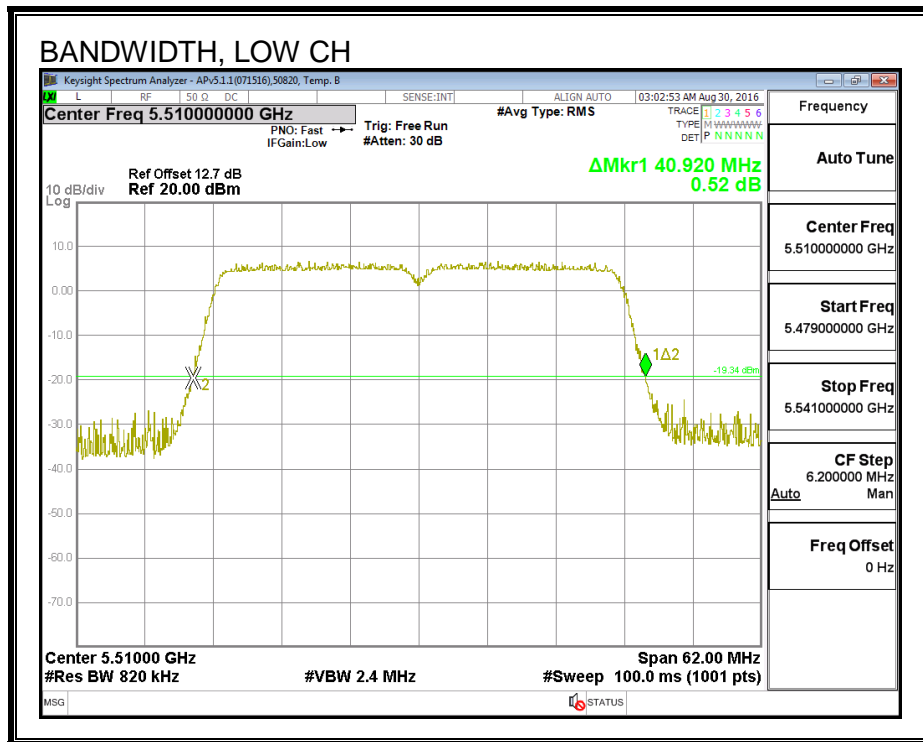

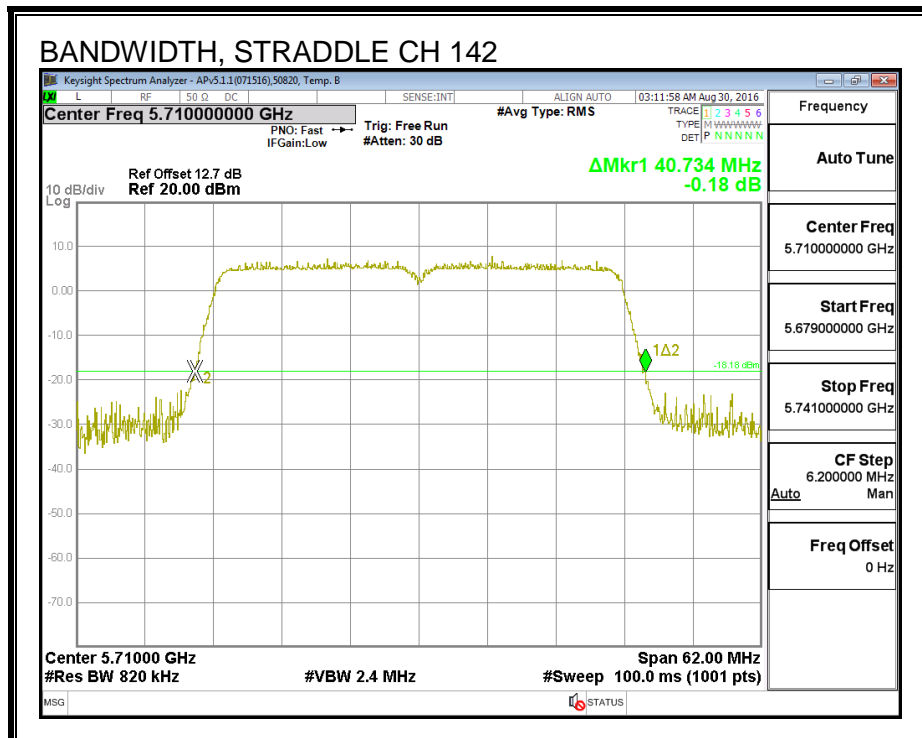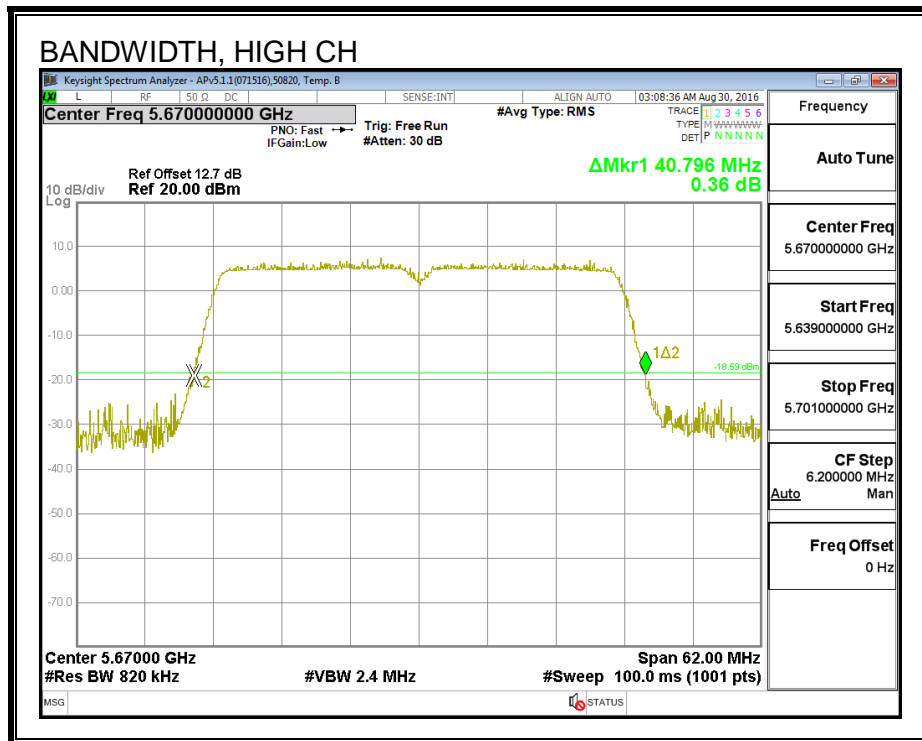

8.82.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5510	36.387	36.459	36.567
Mid	5550	36.518	35.051	36.366
High	5670	36.251	36.378	36.471
142	5710	35.639	36.357	36.543



99% BANDWIDTH, CHAIN 0

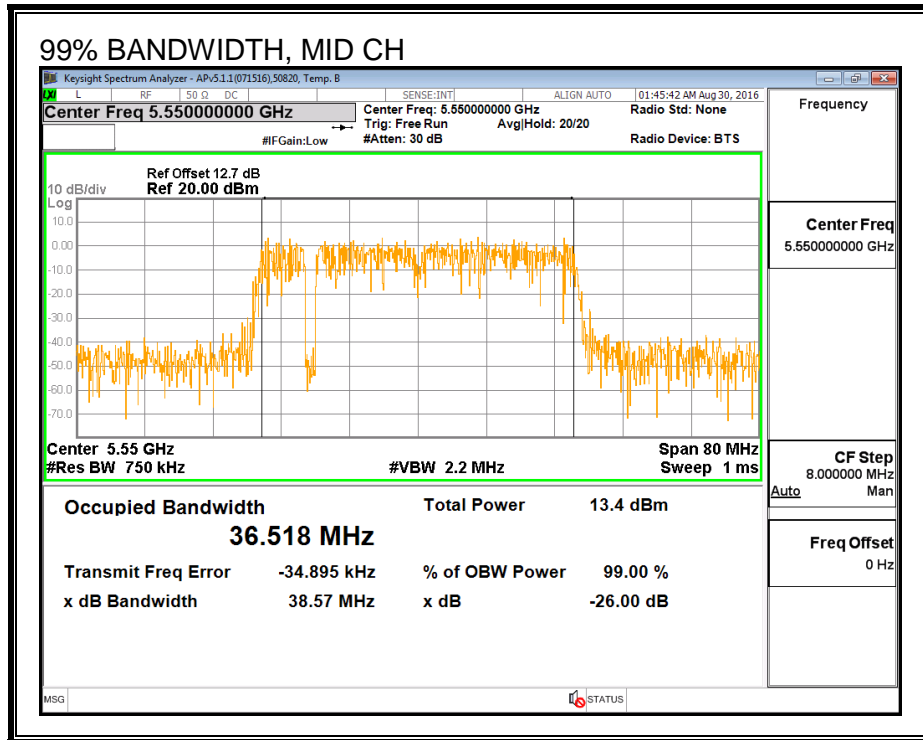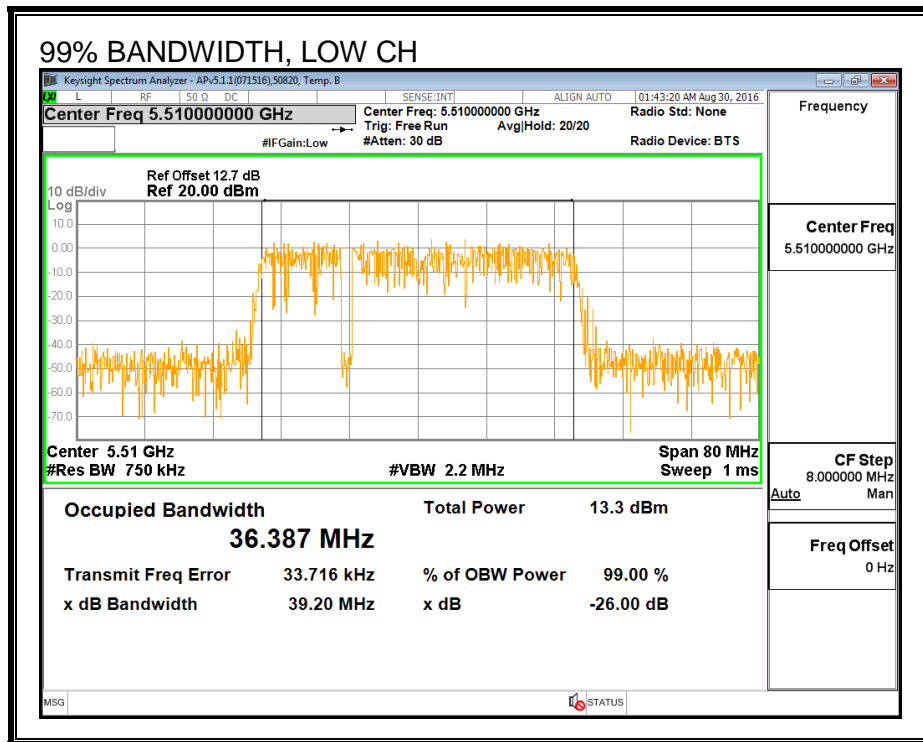

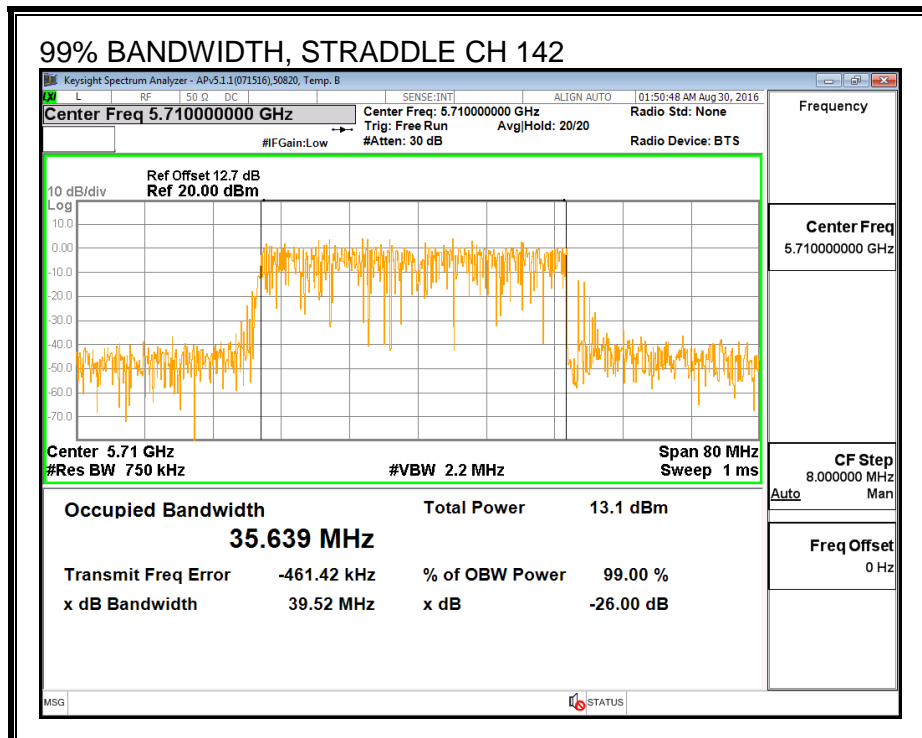
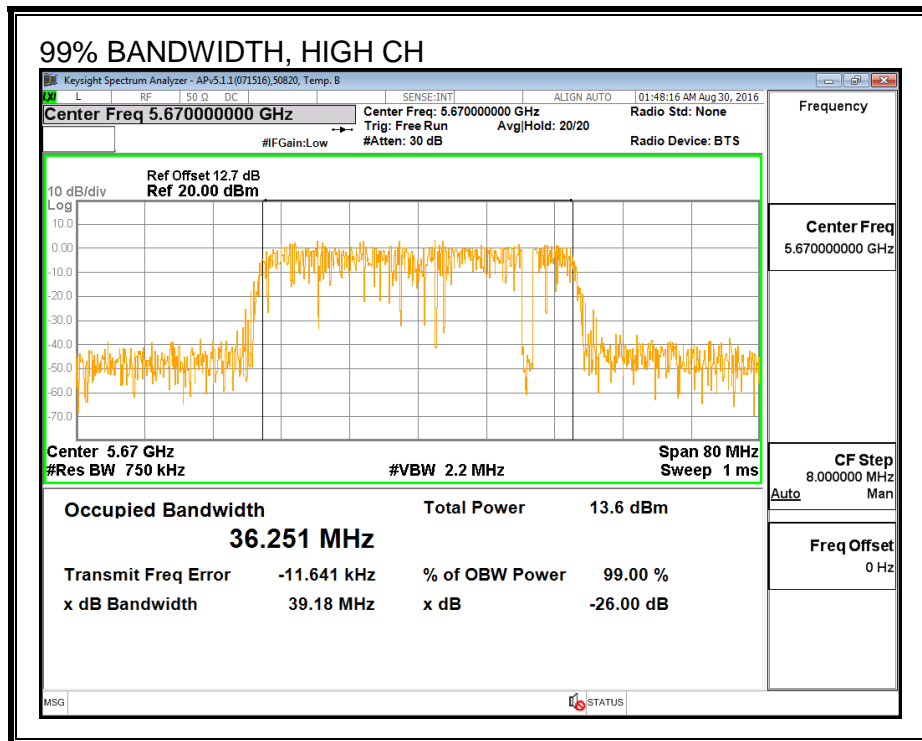




99% BANDWIDTH, CHAIN 1

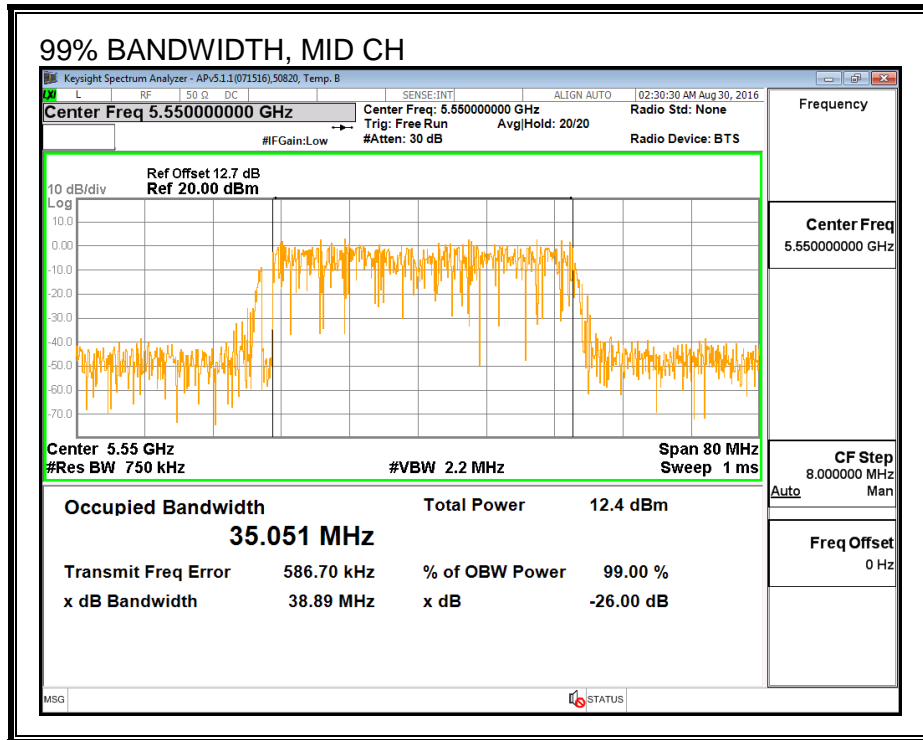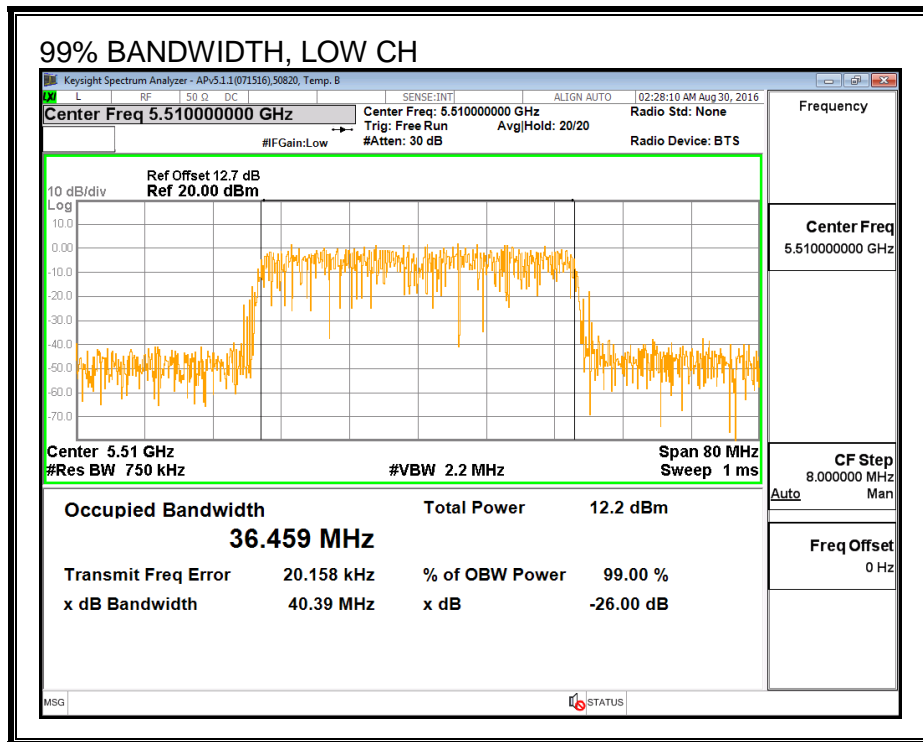

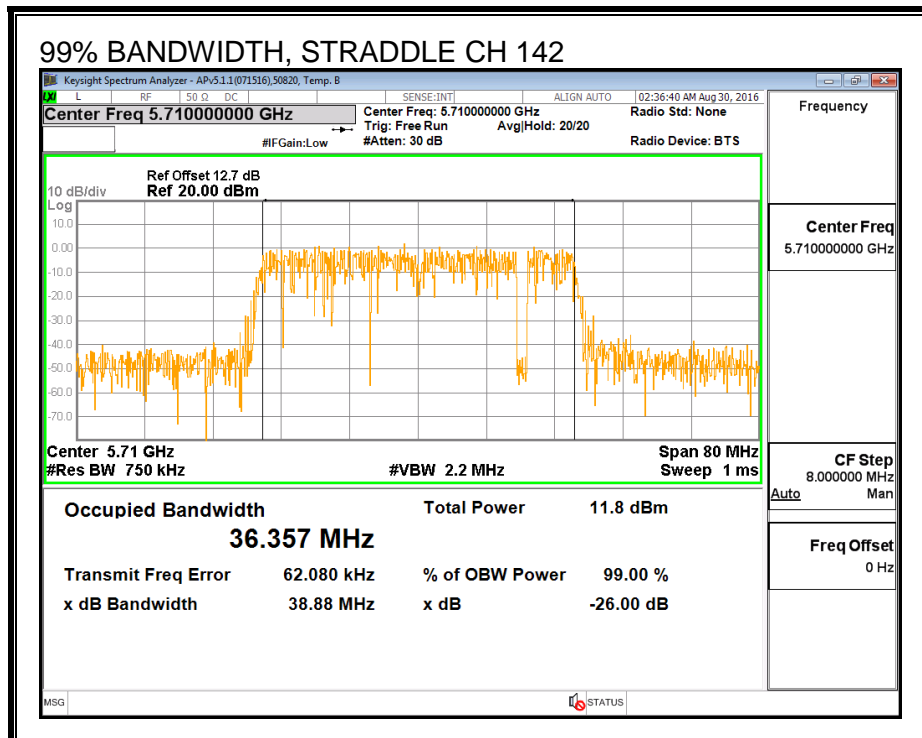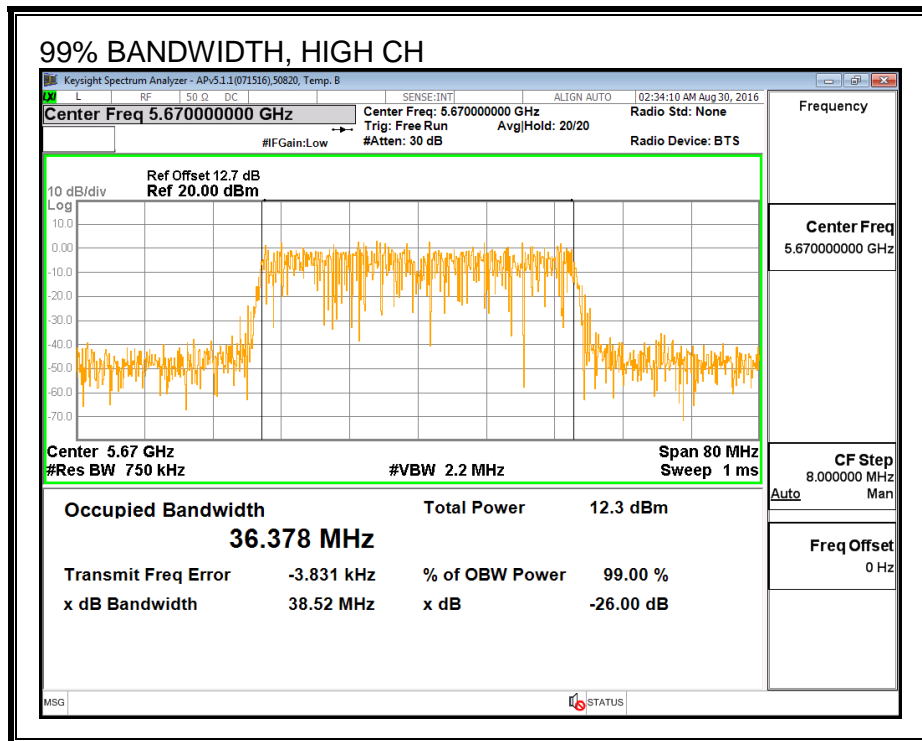

99% BANDWIDTH, CHAIN 2

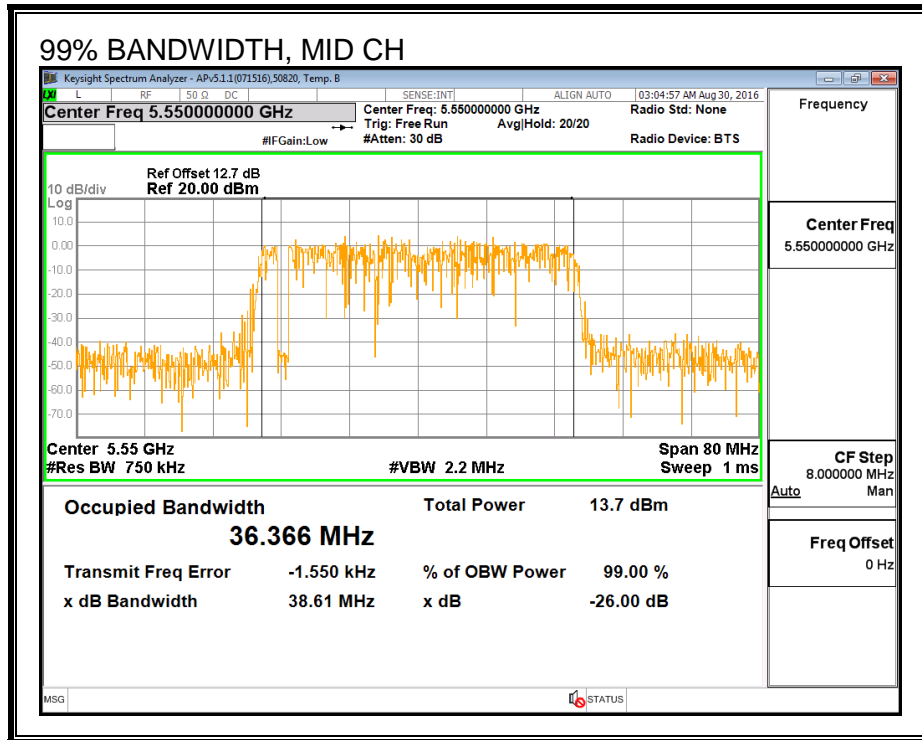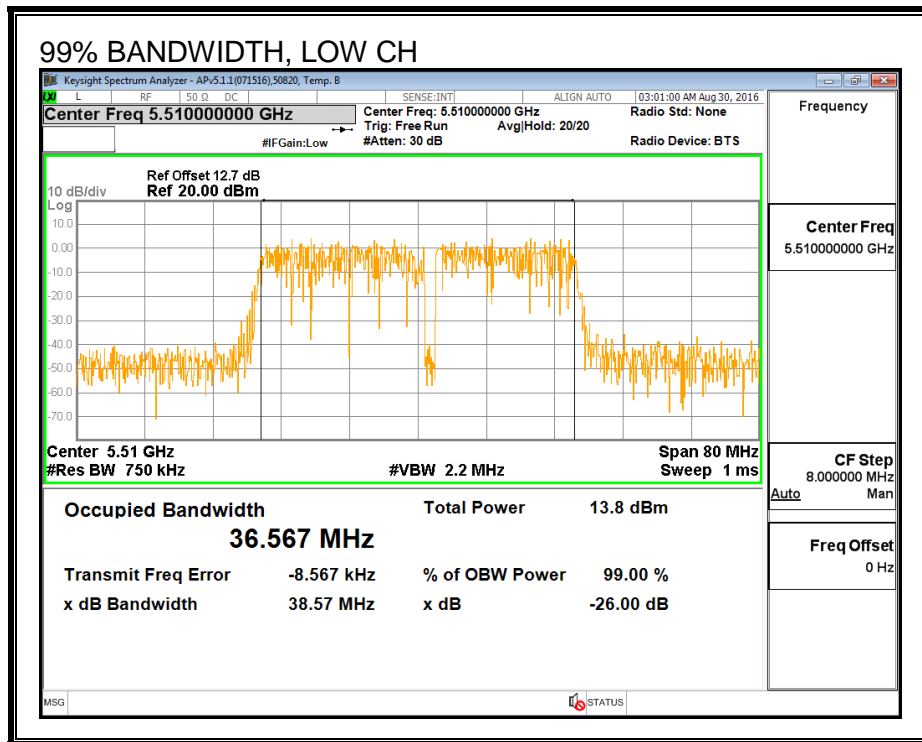

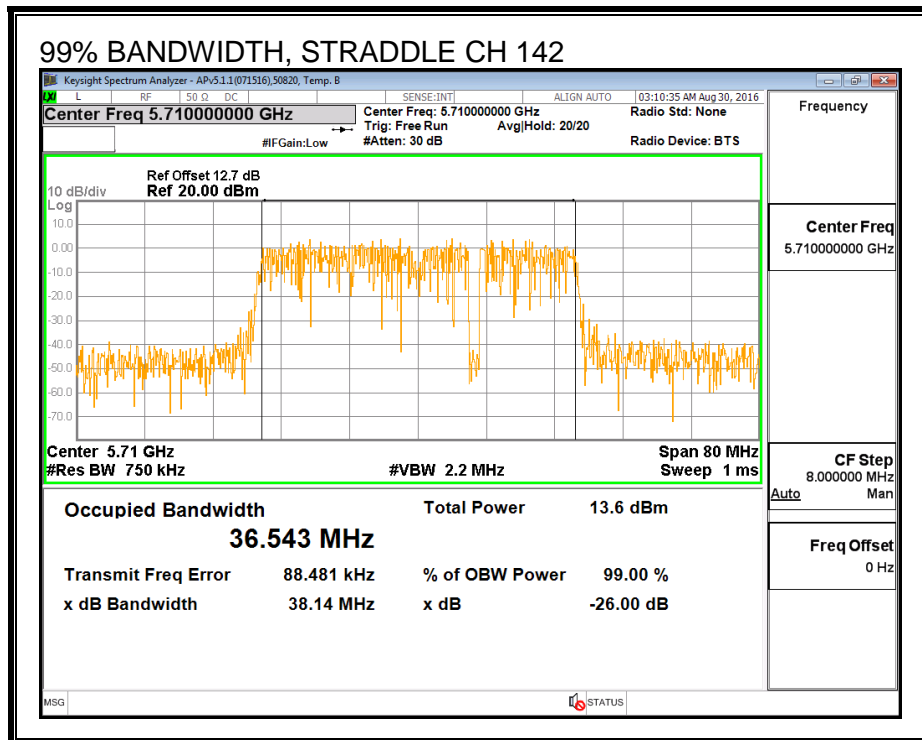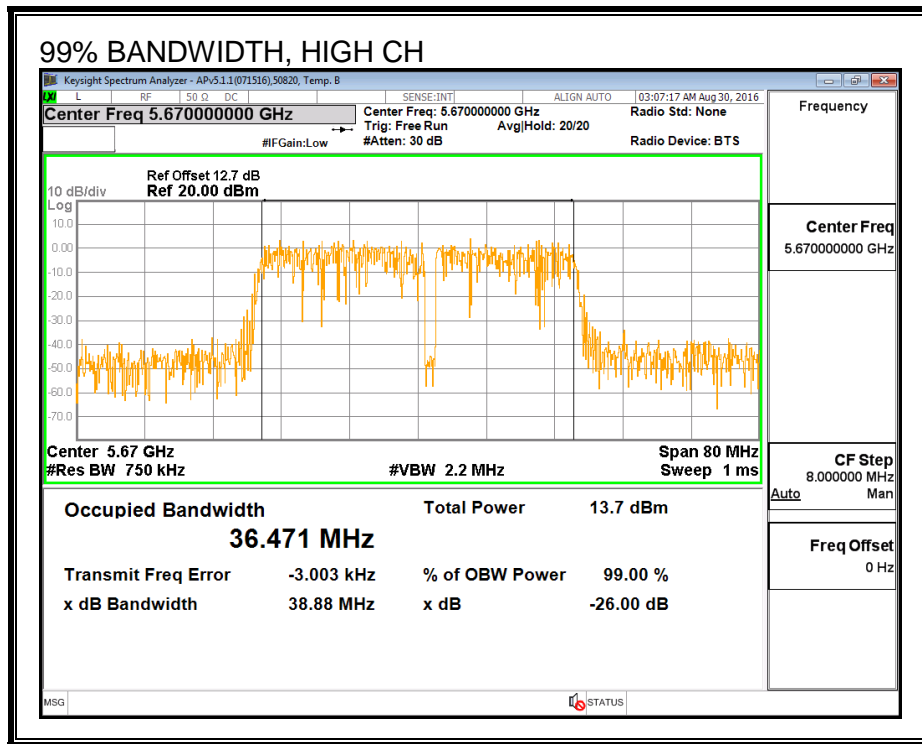

8.82.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5510	9.79	9.87	9.88	14.62
Mid	5550	11.93	11.86	11.82	16.64
High	5670	12.24	12.19	12.14	16.96
142	5710	11.94	11.93	12.00	16.73

8.82.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.90	7.40	5.20	5.98

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
4.90	7.40	5.20	10.68

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.92	36.387	5.98	10.68	24.00	6.32
Mid	5550	40.57	35.051	5.98	10.68	24.00	6.32
High	5670	40.67	36.251	5.98	10.68	24.00	6.32

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	9.79	9.87	9.88	14.62	24.00	-9.38
Mid	5550	11.93	11.86	11.82	16.64	24.00	-7.36
High	5670	12.24	12.19	12.14	16.96	24.00	-7.04

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-4.461	-4.494	-4.515	0.28	6.32	-6.04
Mid	5550	-2.617	-2.584	-2.524	2.20	6.32	-4.12
High	5670	-2.377	-2.349	-2.327	2.42	6.32	-3.90



PSD, CHAIN 0

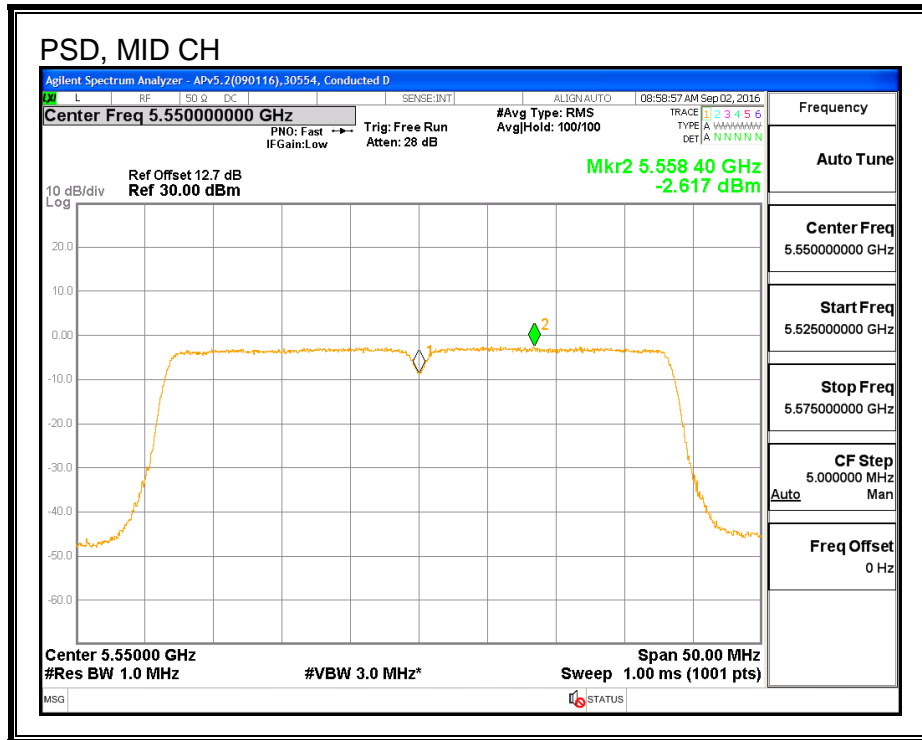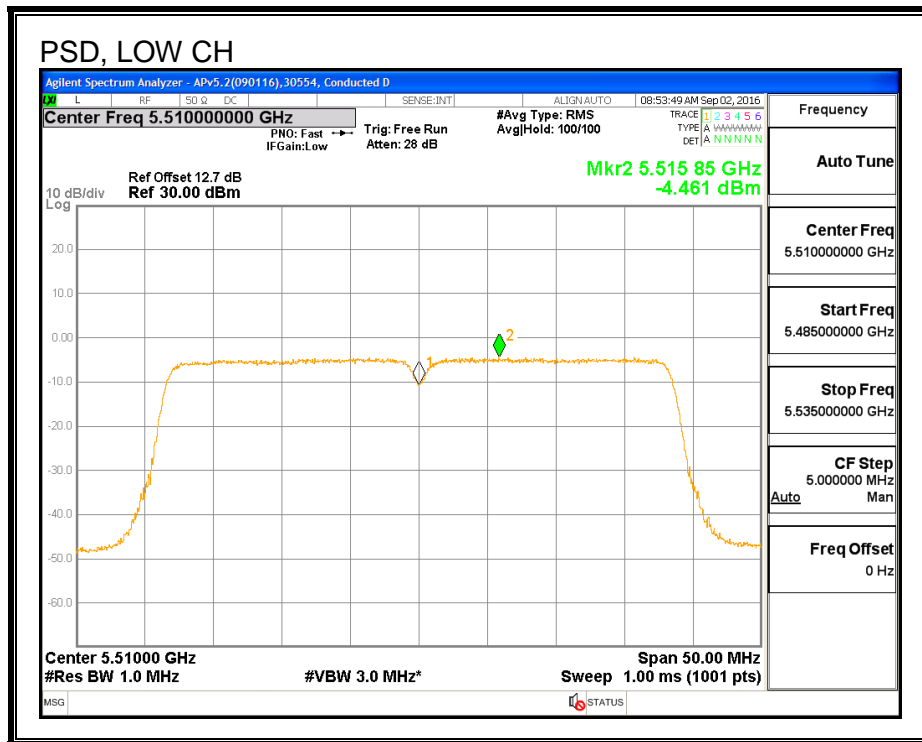


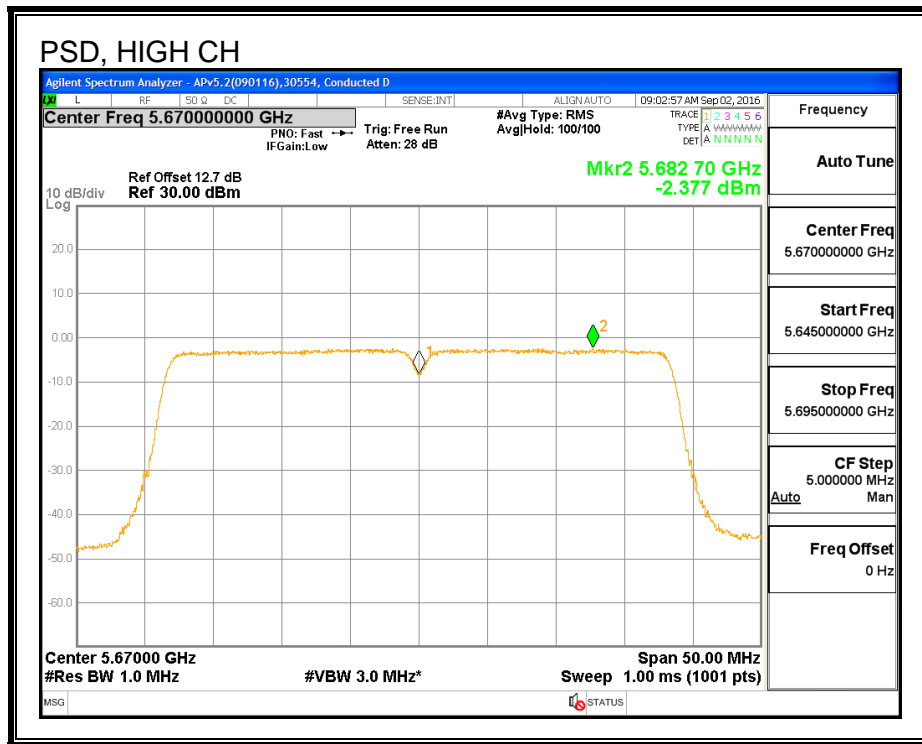



PSD, CHAIN 1

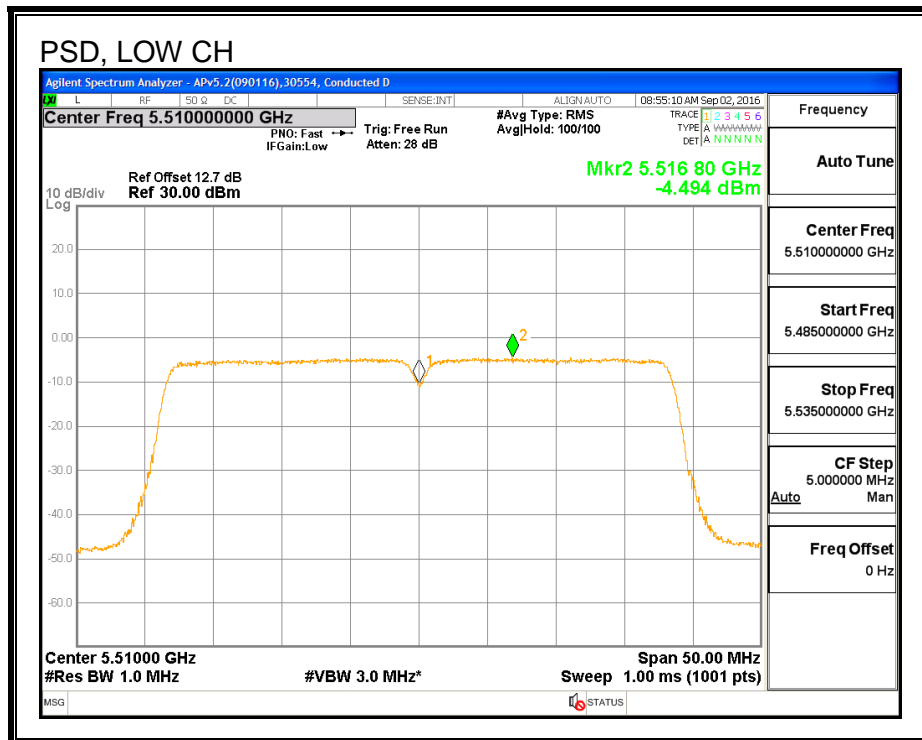

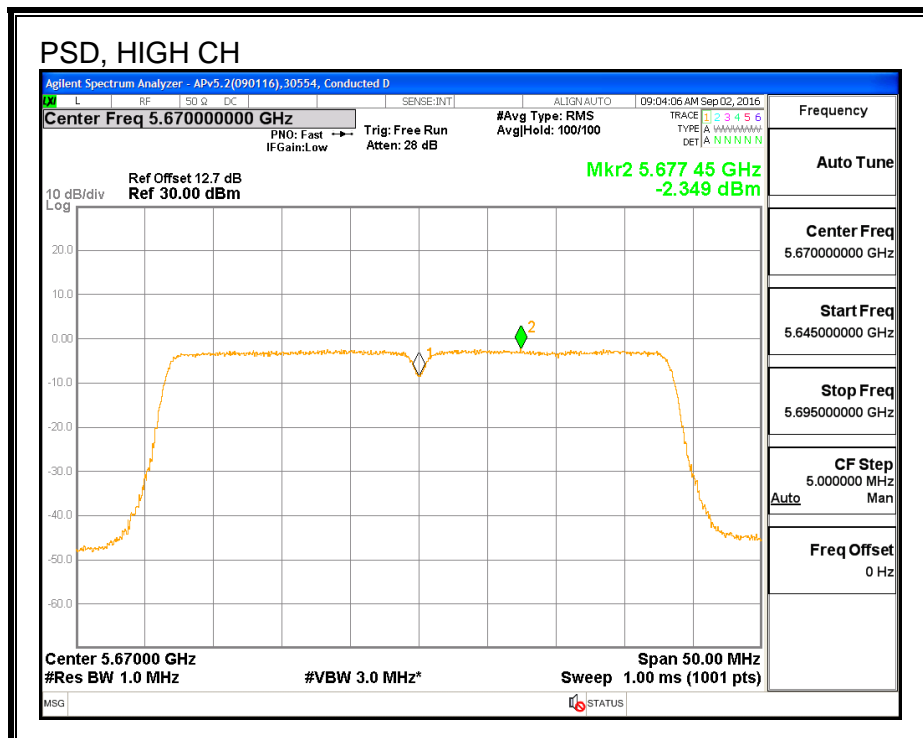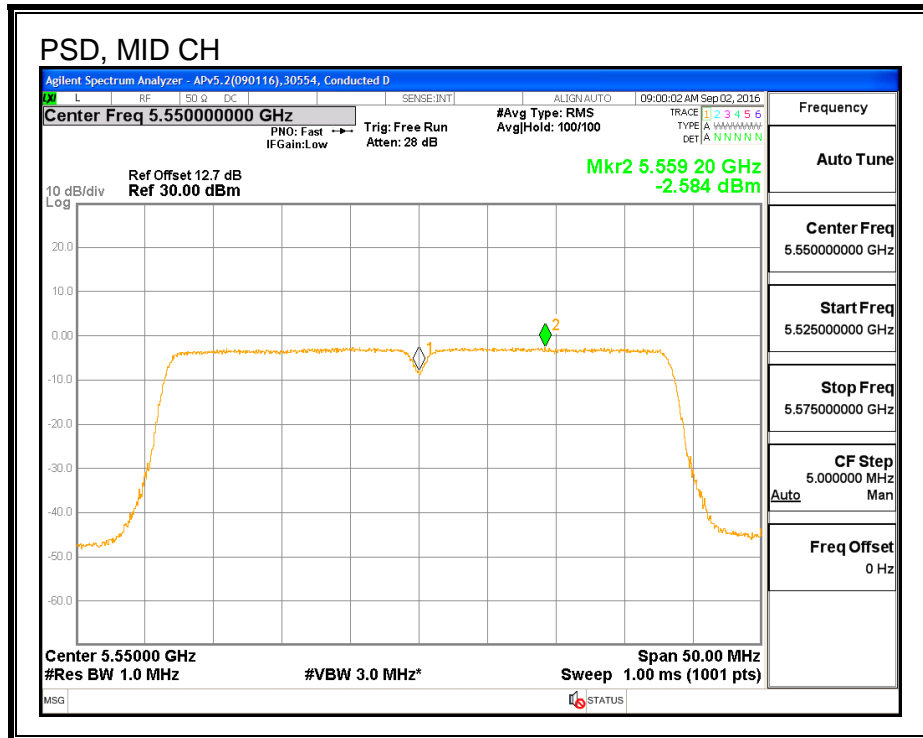

PSD, CHAIN 2

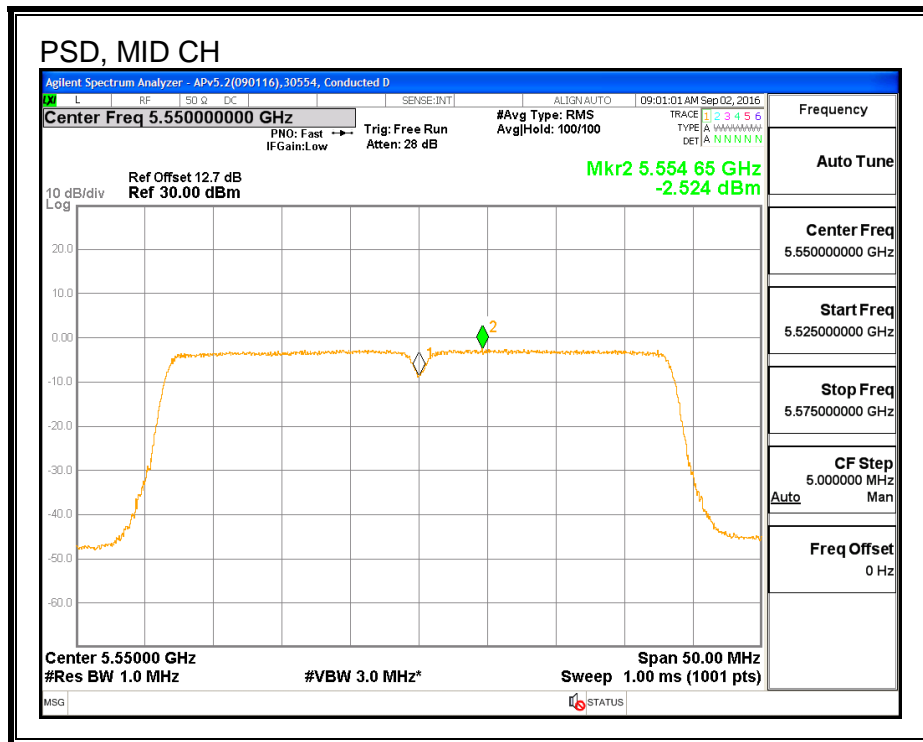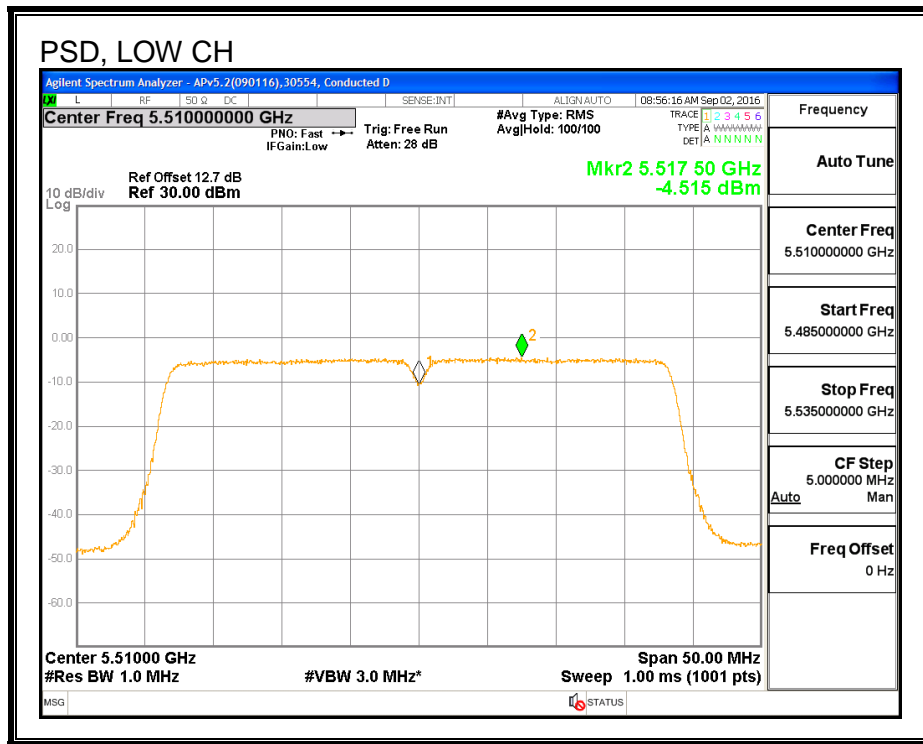

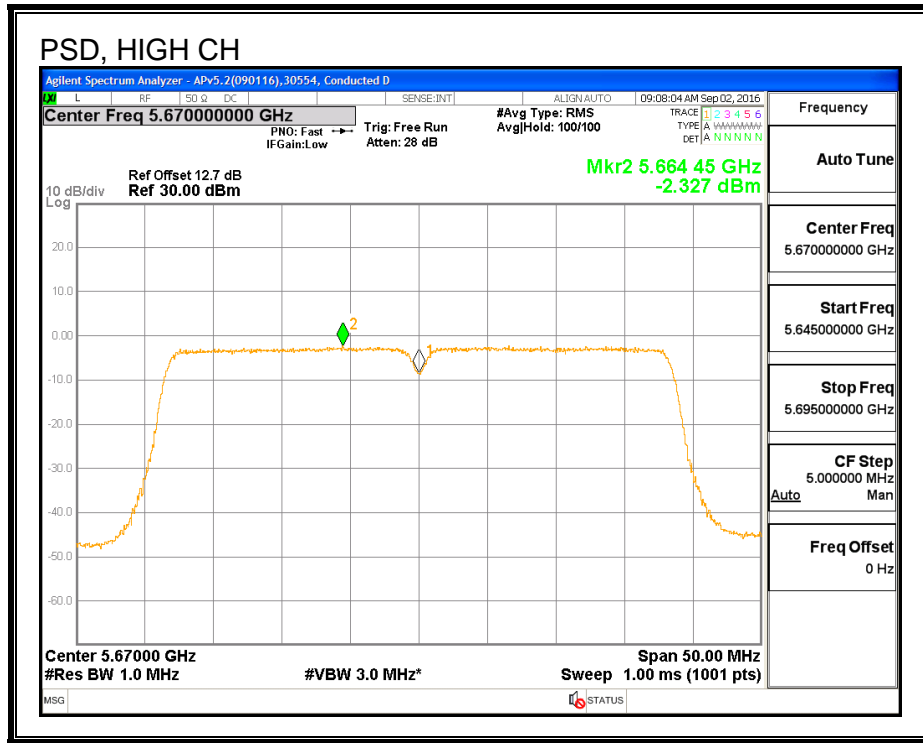

8.83. 802.11ac VHT40 3Tx CDD STRADDLE CHANNEL 142 RESULTS (FCC)

8.83.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.37	5.98	10.68	24.00	6.32

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	11.51	11.47	11.61	16.30	24.00	-7.70


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-3.01	-3.03	-2.79	1.83	6.32	-4.49


OUTPUT POWER, CHAIN 0

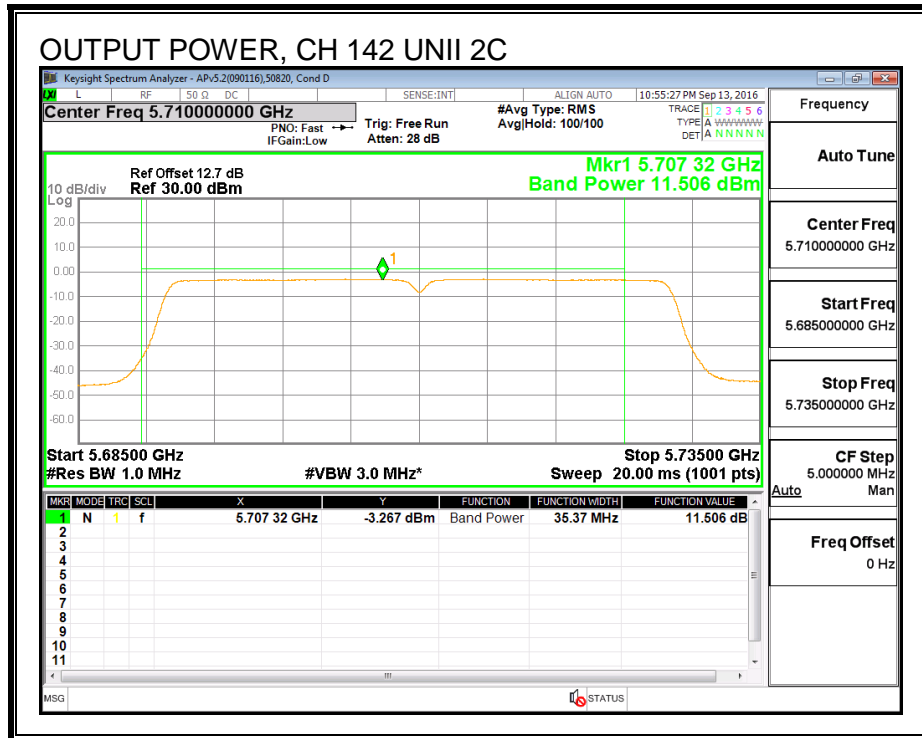


OUTPUT POWER, CHAIN 1

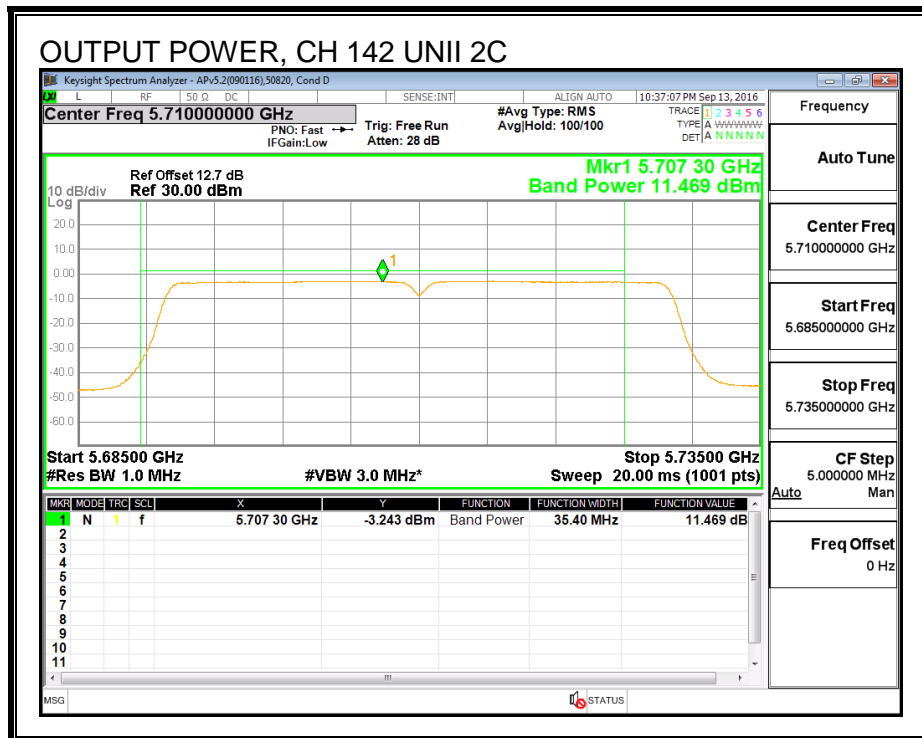


OUTPUT POWER, CHAIN 2

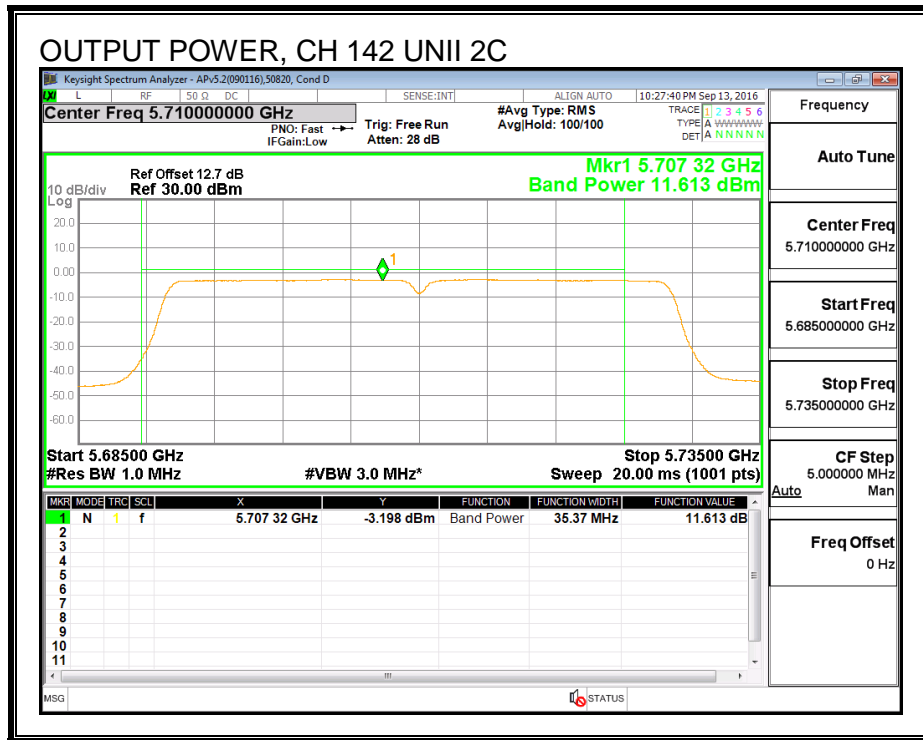


PSD, CHAIN 0

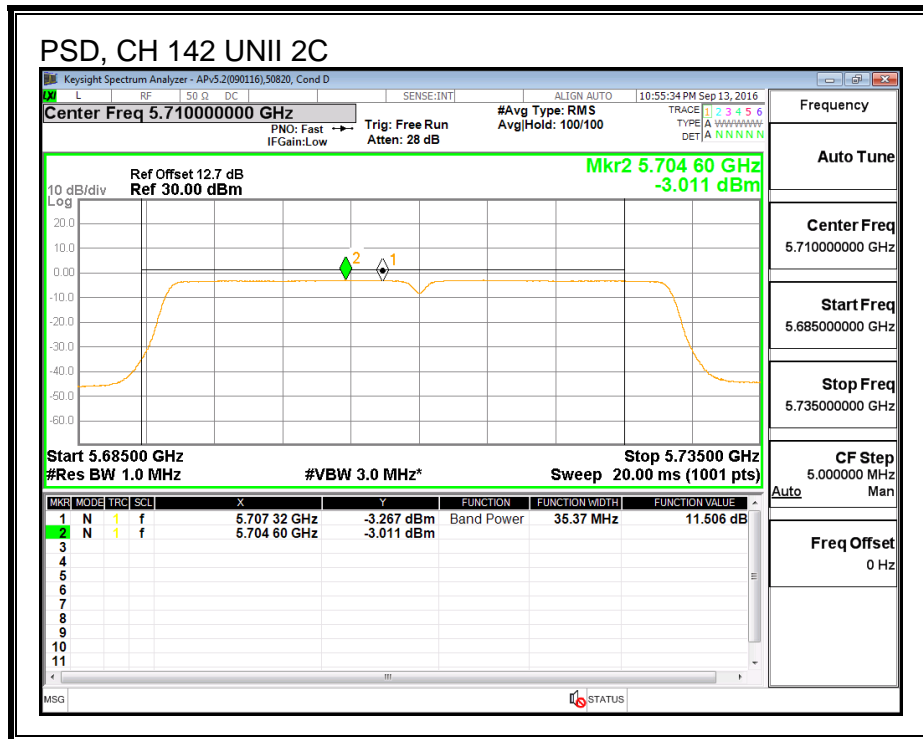

PSD, CHAIN 1

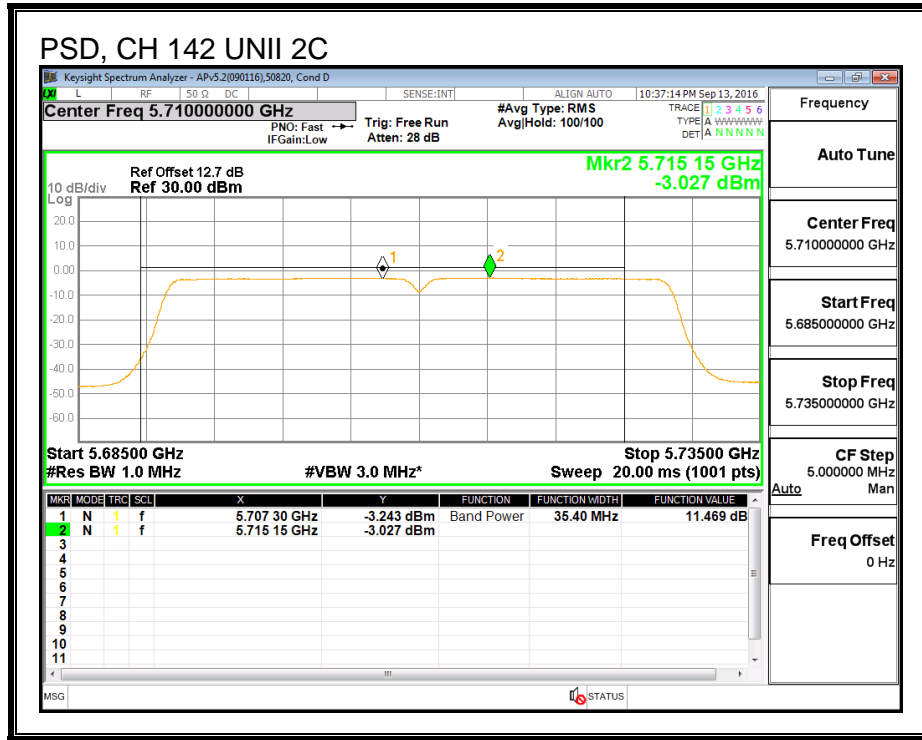

PSD, CHAIN 2

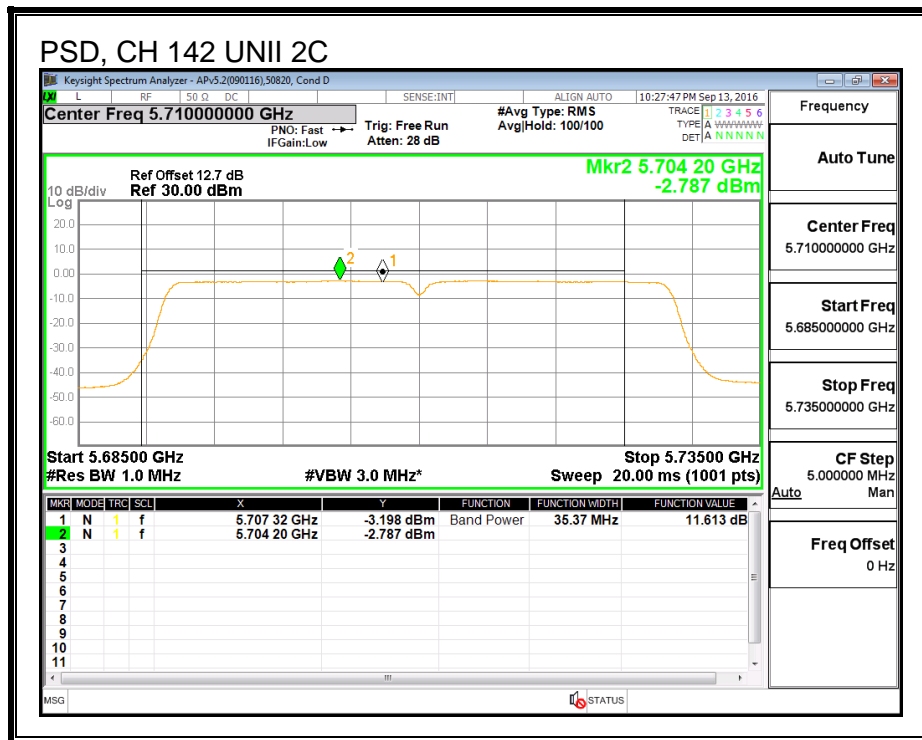

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	5.37	5.98	10.68	30.00	25.32

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.33	1.32	1.38	6.11	30.00	-23.89


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-6.11	-6.21	-6.04	-1.35	25.32	-26.67


OUTPUT POWER, CHAIN 0

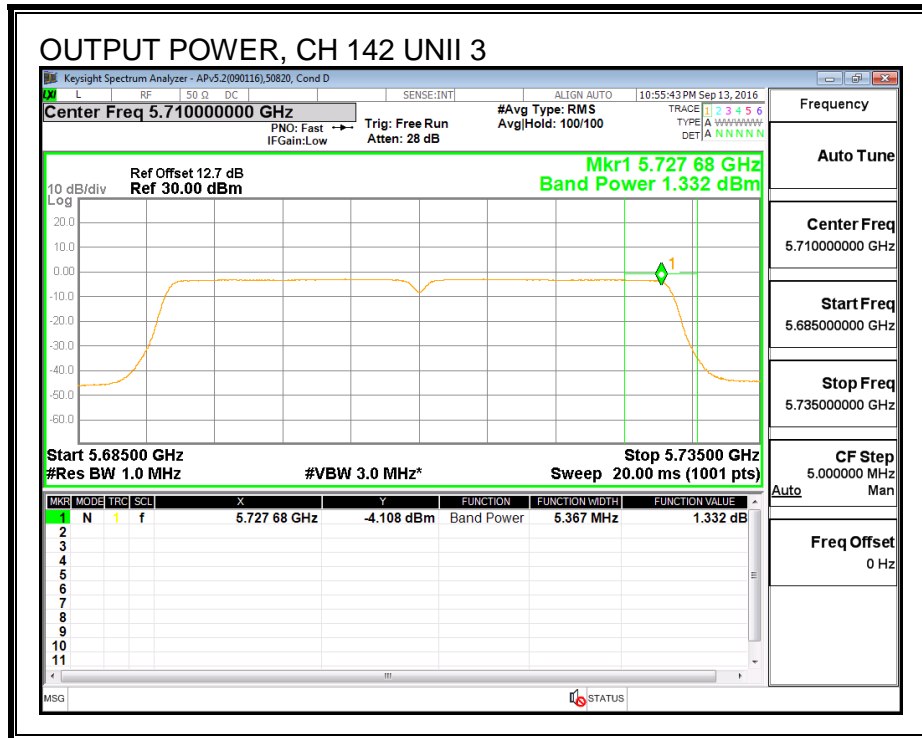


OUTPUT POWER, CHAIN 1

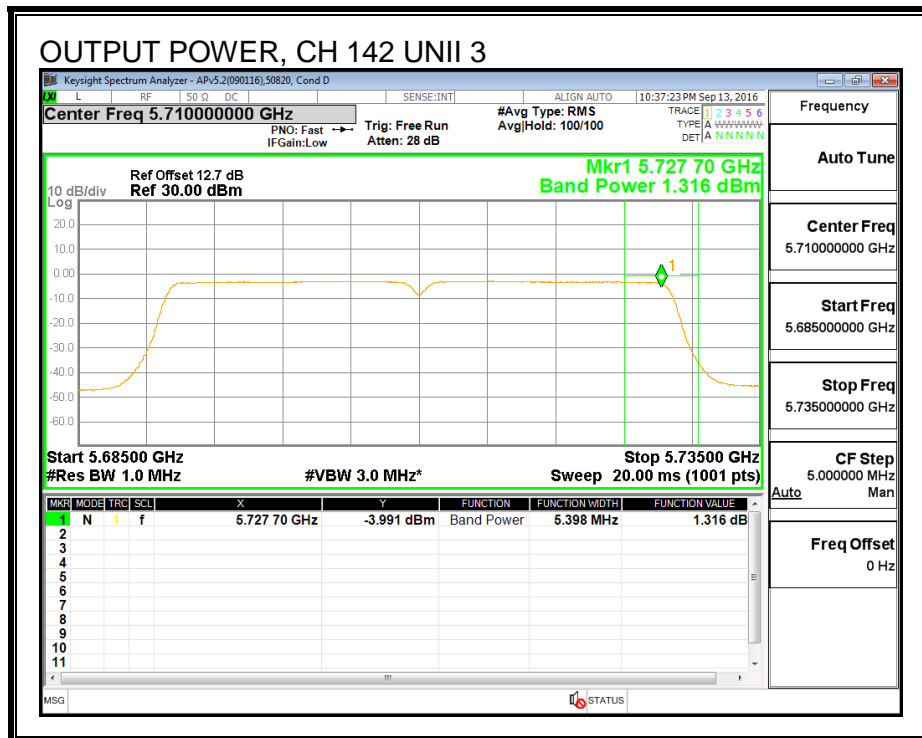


OUTPUT POWER, CHAIN 2

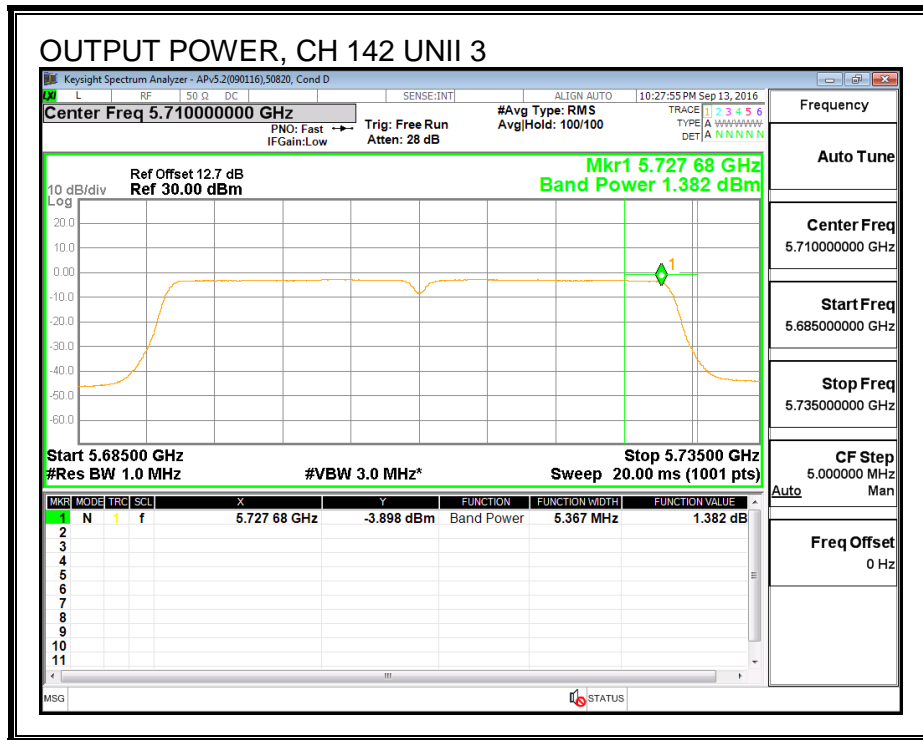


PSD, CHAIN 0

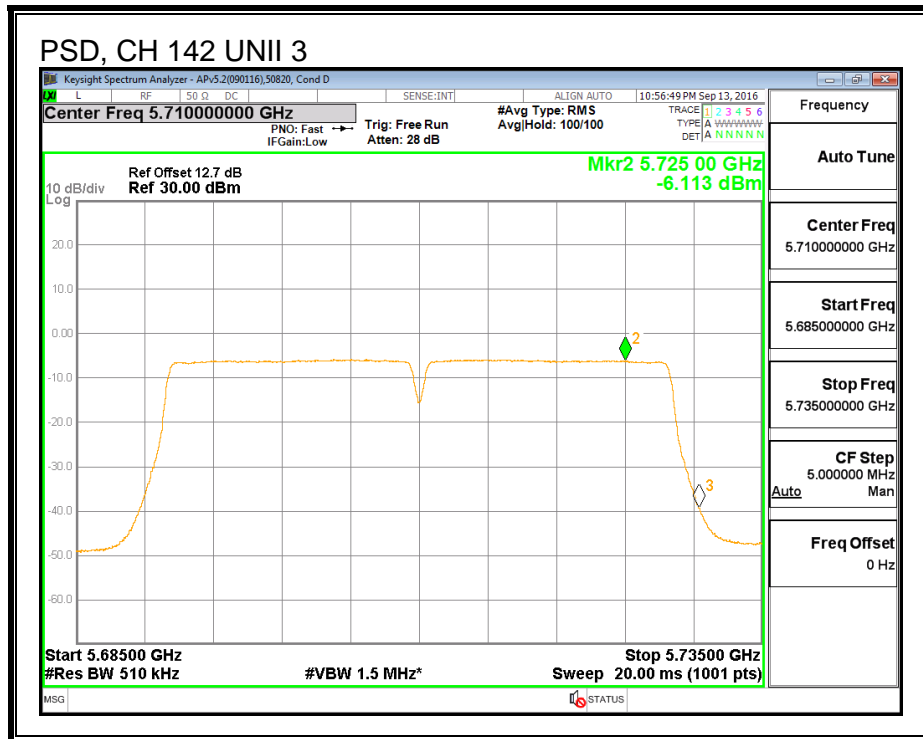

PSD, CHAIN 1

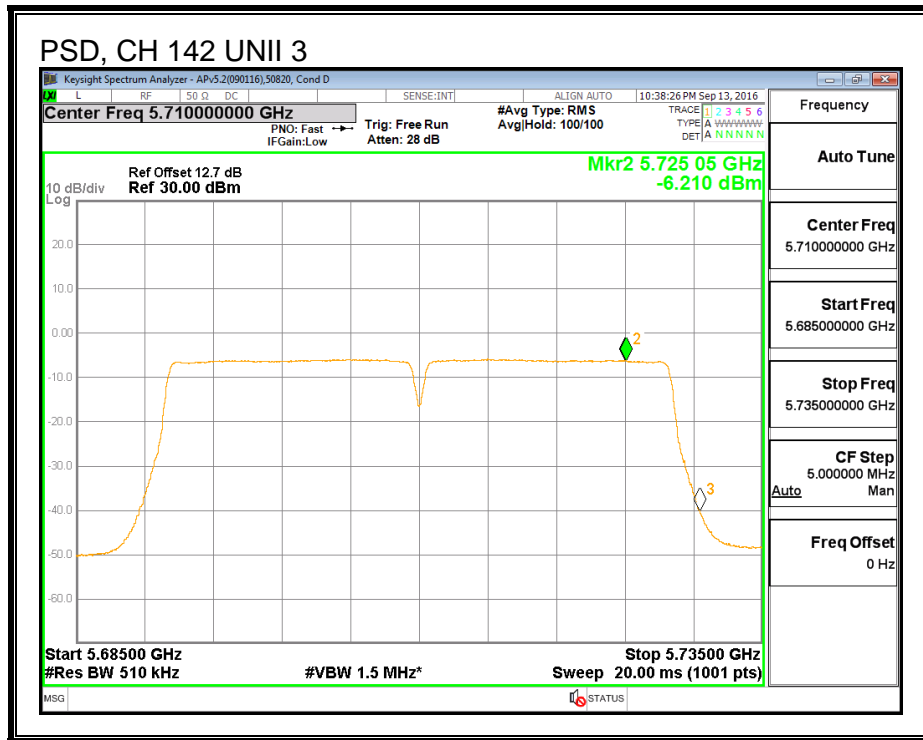

PSD, CHAIN 2

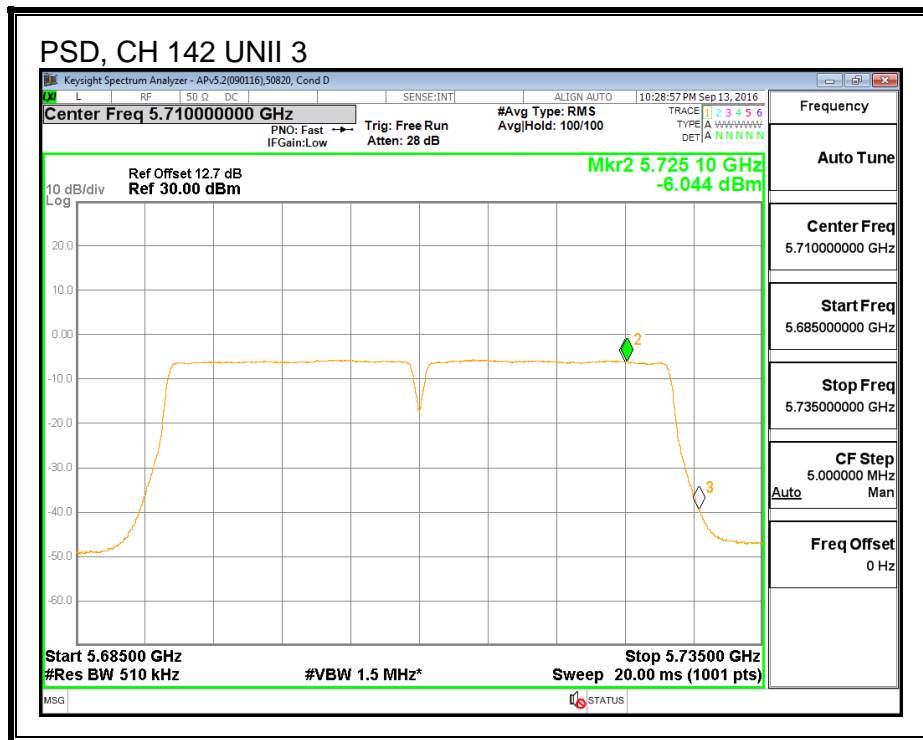

8.84. 802.11ac VHT40 3Tx CDD STRADDLE CHANNEL 142 RESULTS (IC)

8.84.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	32.820	5.98	10.68	24.00	6.32

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	11.45	11.44	11.59	16.26	24.00	-7.74


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-3.01	-3.03	-2.79	1.83	6.32	-4.49


OUTPUT POWER, CHAIN 0

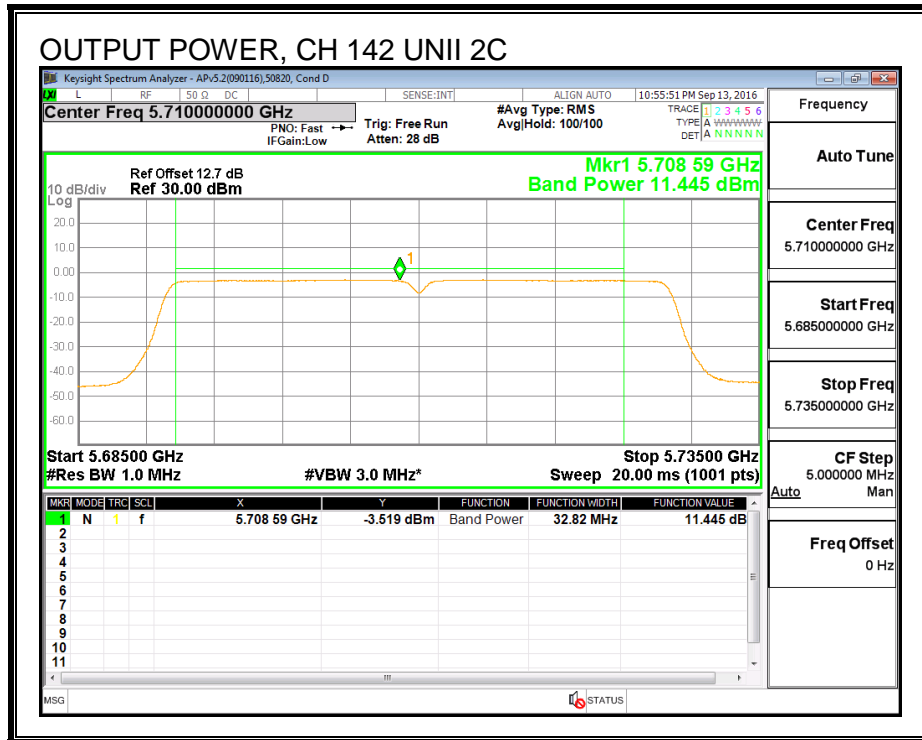


OUTPUT POWER, CHAIN 1

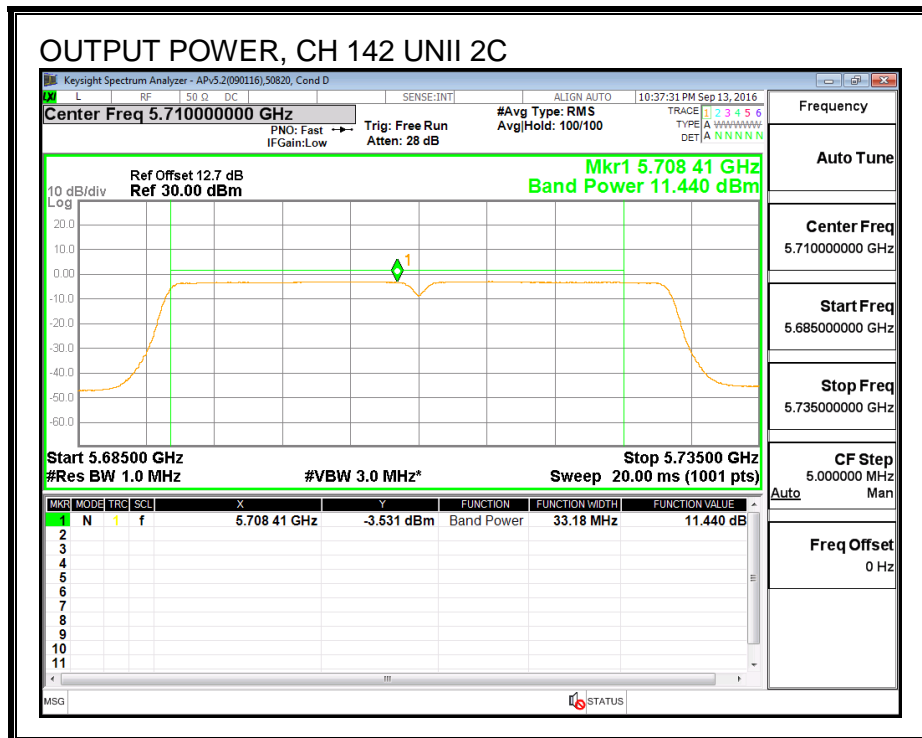


OUTPUT POWER, CHAIN 2

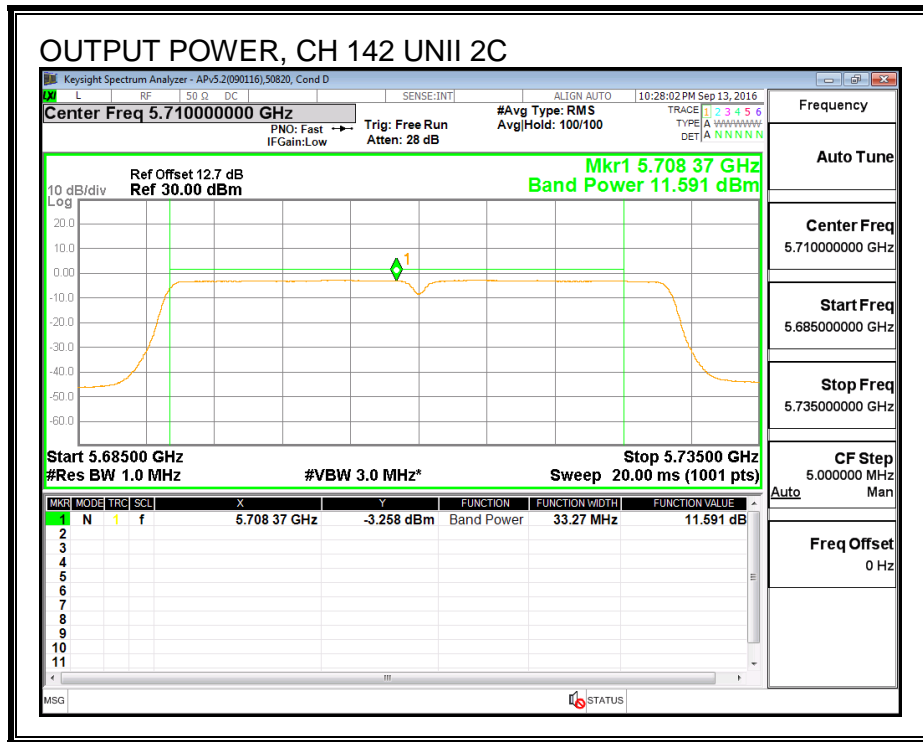


PSD, CHAIN 0

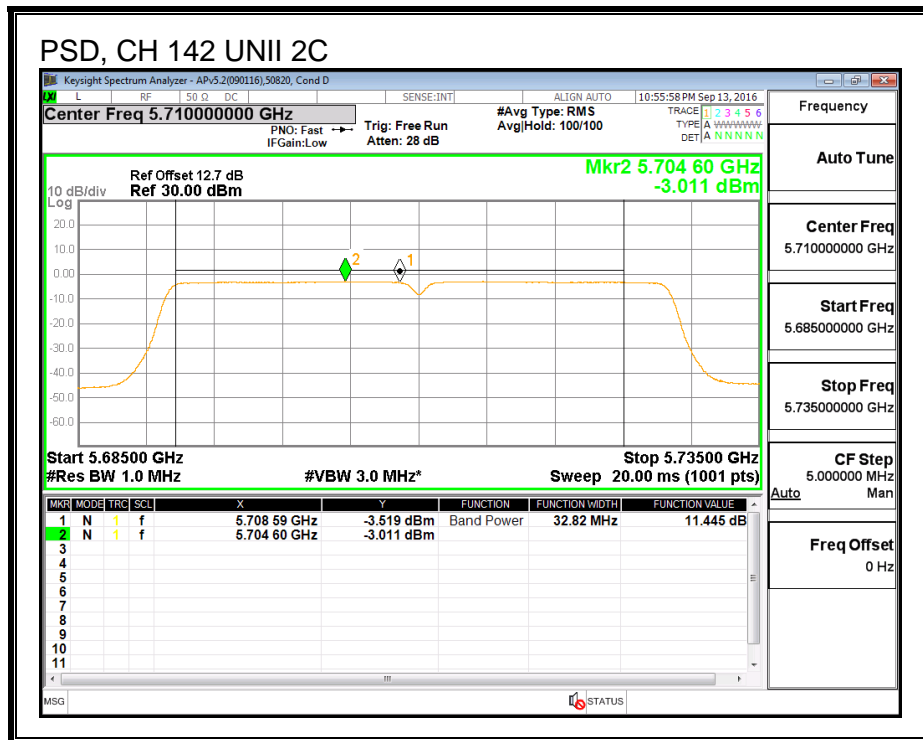

PSD, CHAIN 1

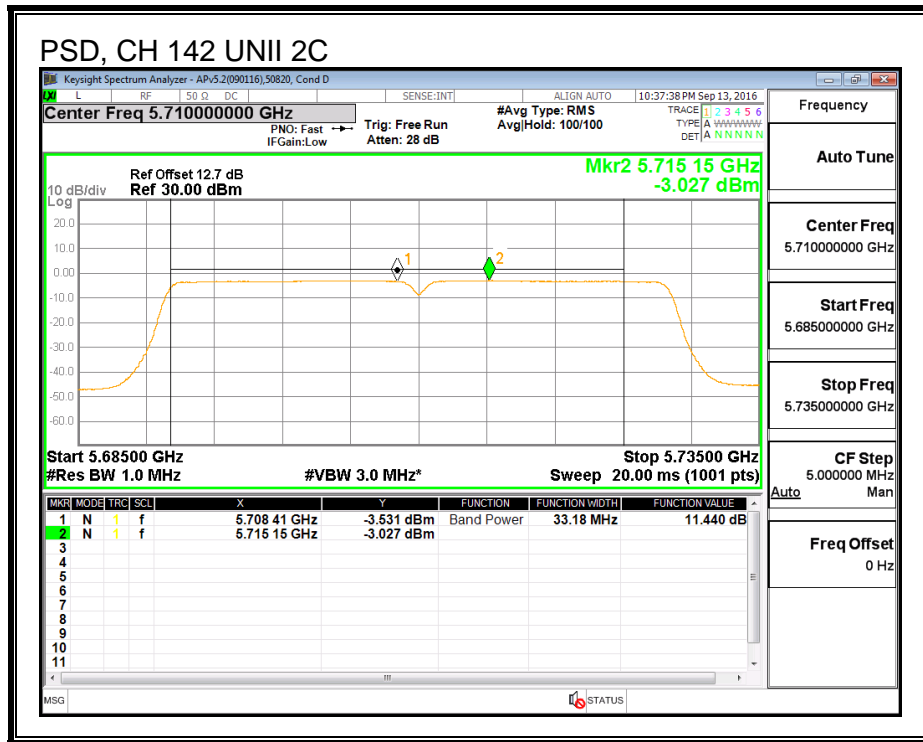

PSD, CHAIN 2

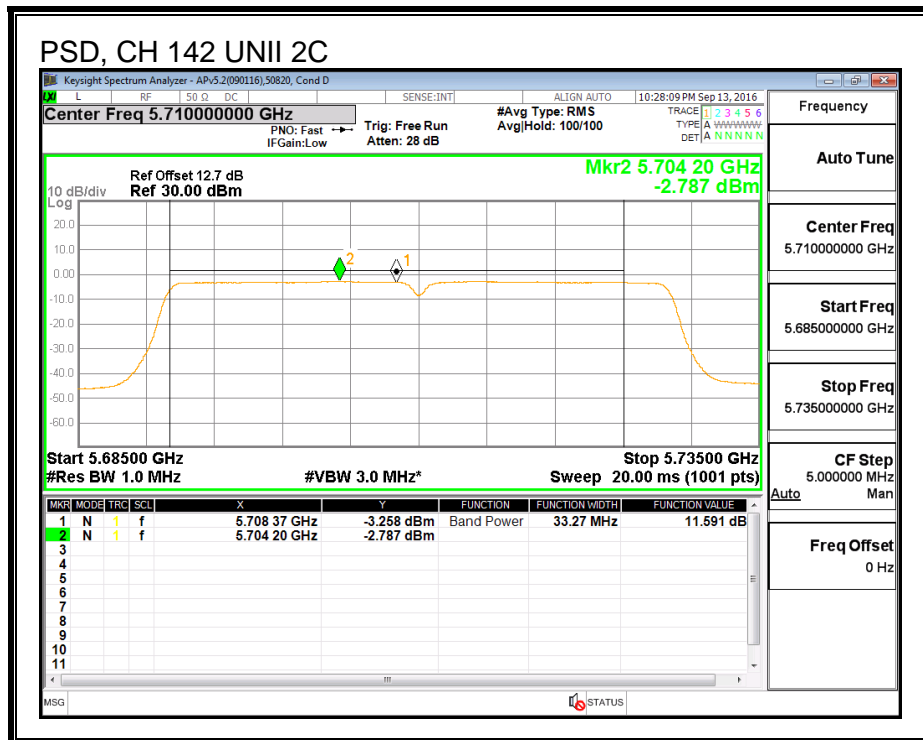

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	2.820	5.98	10.68	30.00	25.32

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	0.62	1.00	1.12	5.69	30.00	-24.31

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-6.11	-6.21	-6.04	-1.35	25.32	-26.67

OUTPUT POWER, CHAIN 0

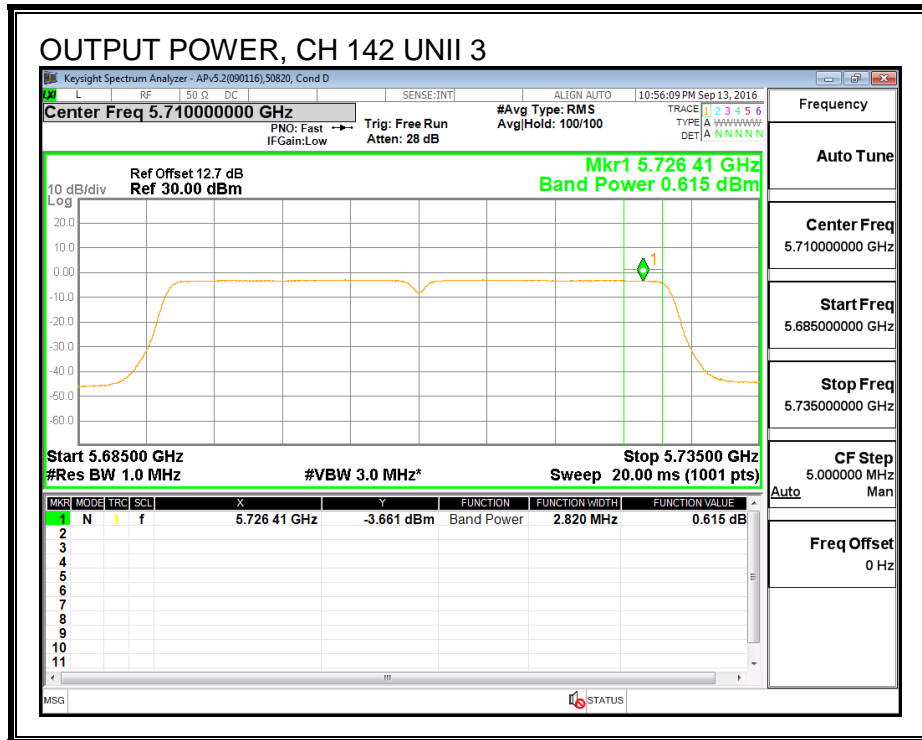

OUTPUT POWER, CHAIN 1

