

8.4.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	13.69	13.67	16.69
Mid	5200	13.65	13.68	16.68
High	5240	13.71	13.70	16.72

8.4.4. OUTPUT POWER AND PSD (FCC)

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.60	7.00	6.80

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	6.80	6.80	23.20	10.20
Mid	5200	6.80	6.80	23.20	10.20
High	5240	6.80	6.80	23.20	10.20

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.69	13.67	16.69	23.20	-6.51
Mid	5200	13.65	13.68	16.68	23.20	-6.52
High	5240	13.71	13.70	16.72	23.20	-6.48

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	1.87	1.90	4.90	10.20	-5.30
Mid	5200	2.95	2.84	5.90	10.20	-4.30
High	5240	2.83	2.94	5.90	10.20	-4.30



PSD, CHAIN 0

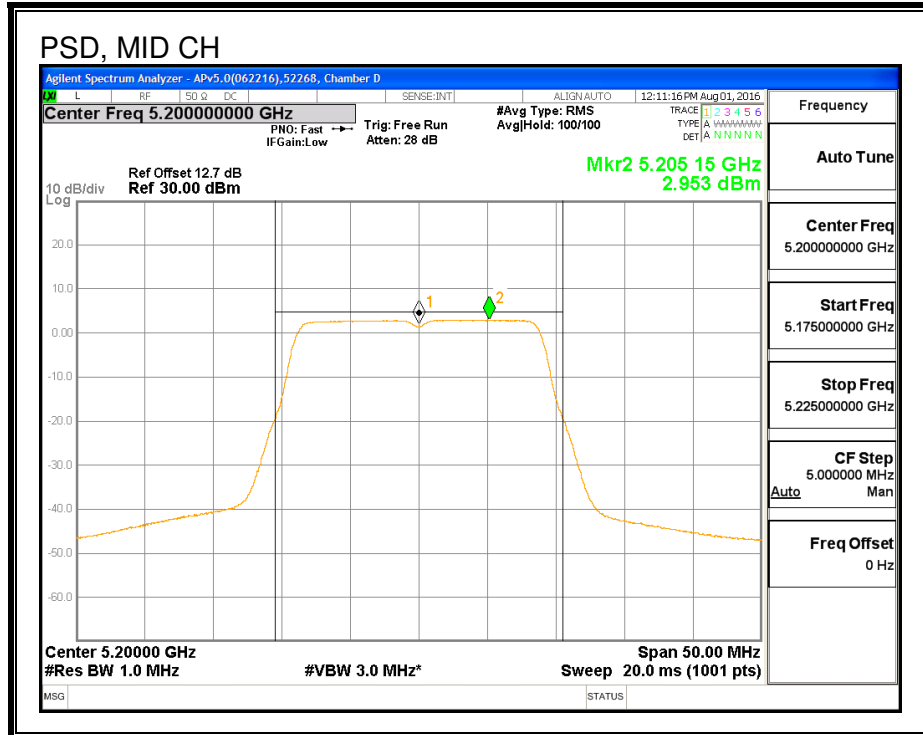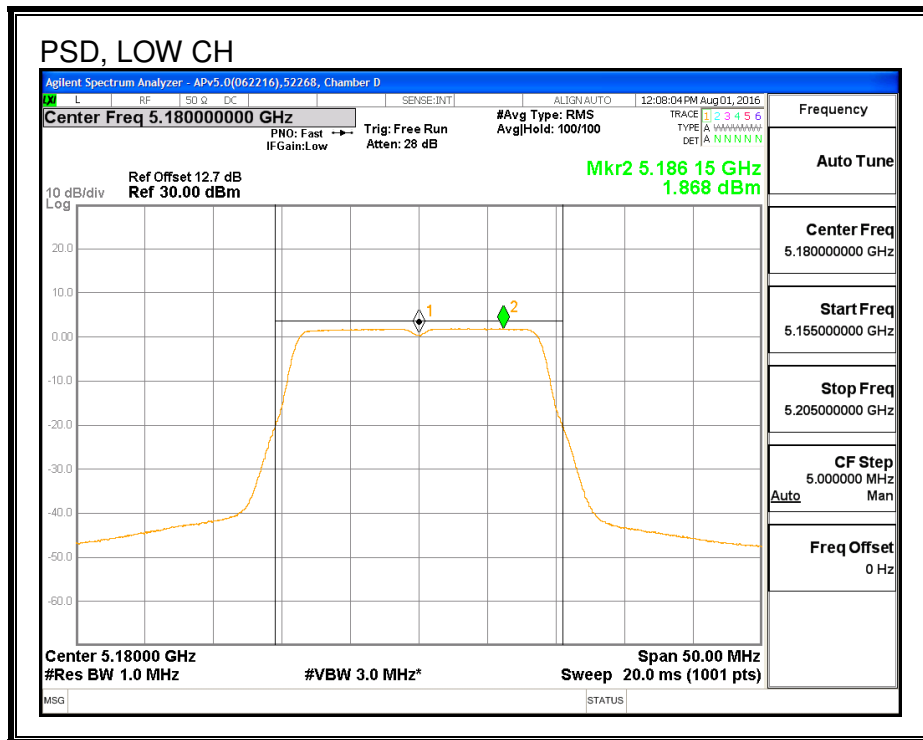

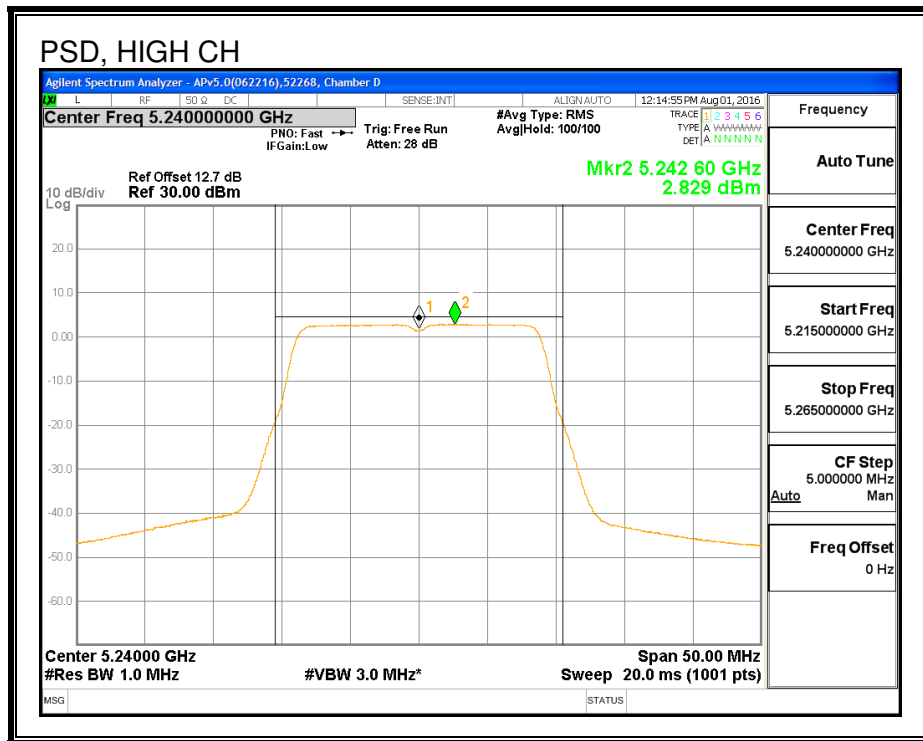

PSD, CHAIN 1

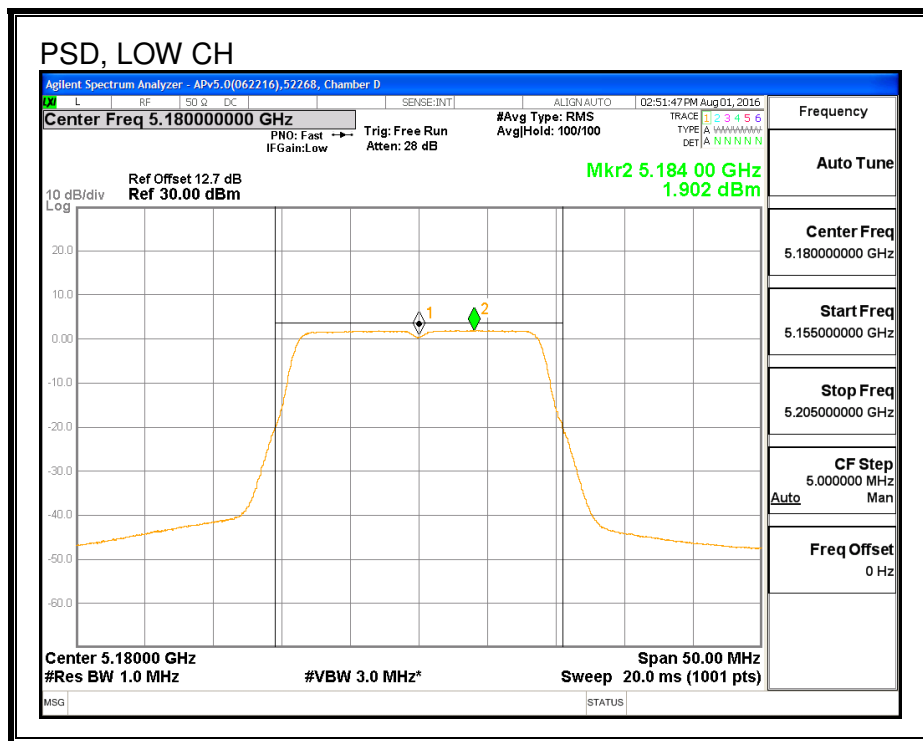

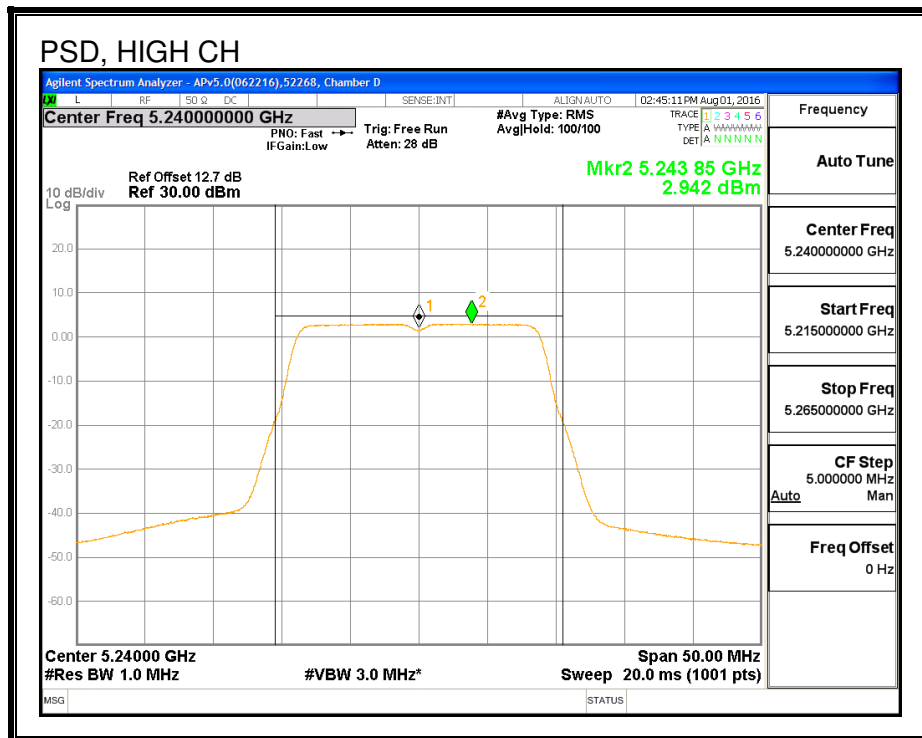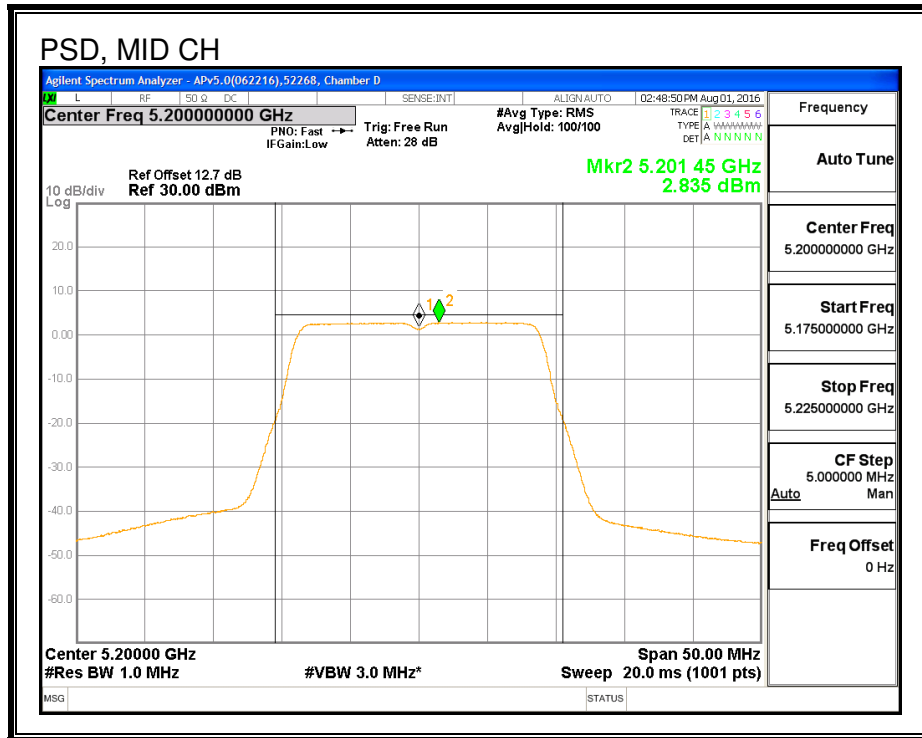

8.4.5. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	7.84	7.73	10.80
Mid	5200	7.93	7.85	10.90
High	5240	7.91	7.90	10.92

8.4.6. OUTPUT POWER AND PSD (IC)

LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.60	7.00	6.80

RESULTS

ID:	52268	Date:	8/1/16
------------	-------	--------------	--------

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5180	17.90	6.80	6.80
Mid	5200	17.96	6.80	6.80
High	5240	17.90	6.80	6.80

Limits

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
Low	5180	22.53	15.73	10.00	3.20
Mid	5200	22.54	15.74	10.00	3.20
High	5240	22.53	15.73	10.00	3.20

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	7.84	7.73	10.80	15.73	-4.93
Mid	5200	7.93	7.85	10.90	15.74	-4.84
High	5240	7.91	7.90	10.92	15.73	-4.81

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	-4.32	-4.42	-1.36	3.20	-4.56
Mid	5200	-4.22	-3.99	-1.09	3.20	-4.29
High	5240	-4.24	-4.29	-1.25	3.20	-4.45



PSD, CHAIN 0

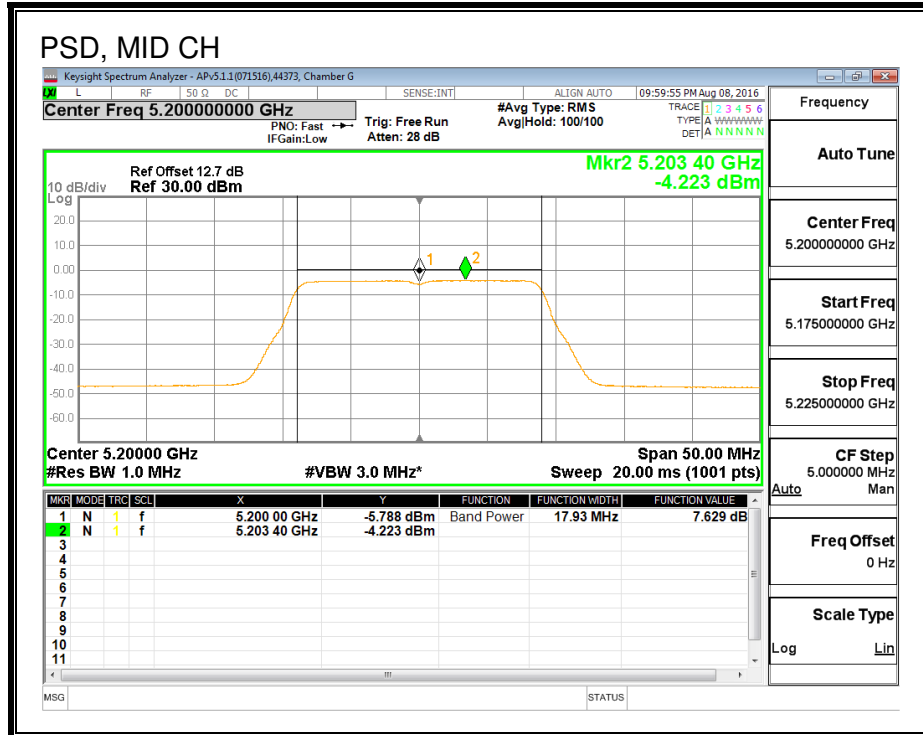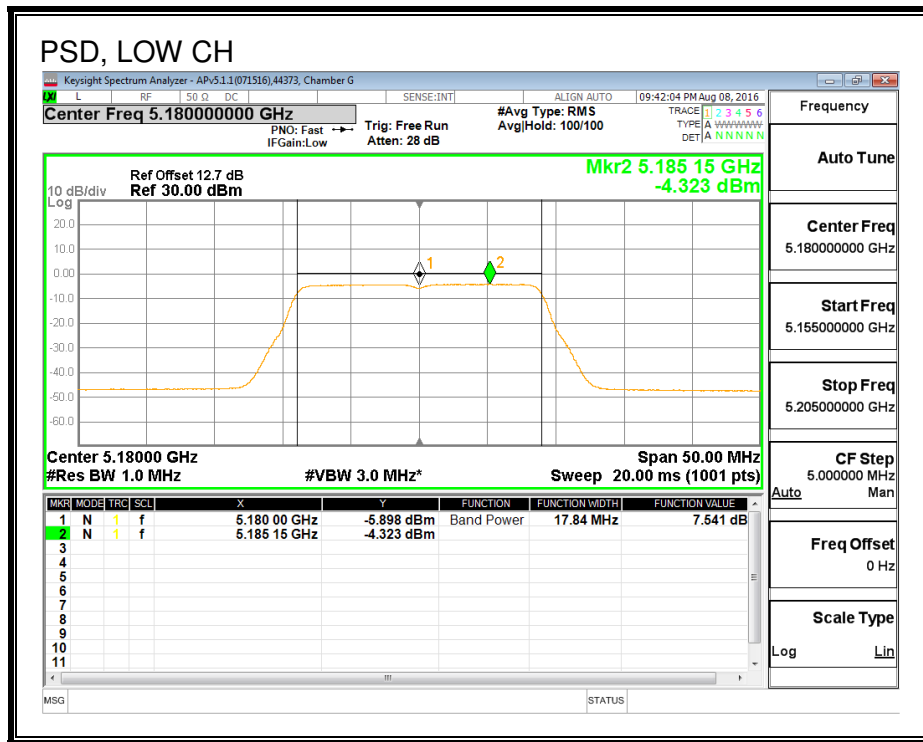

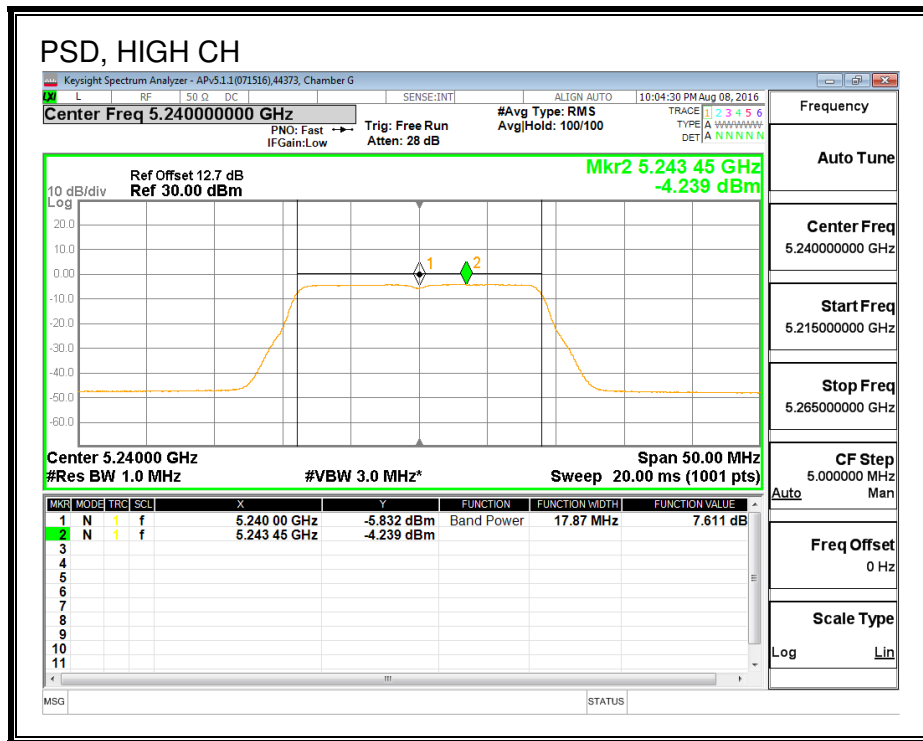

PSD, CHAIN 1

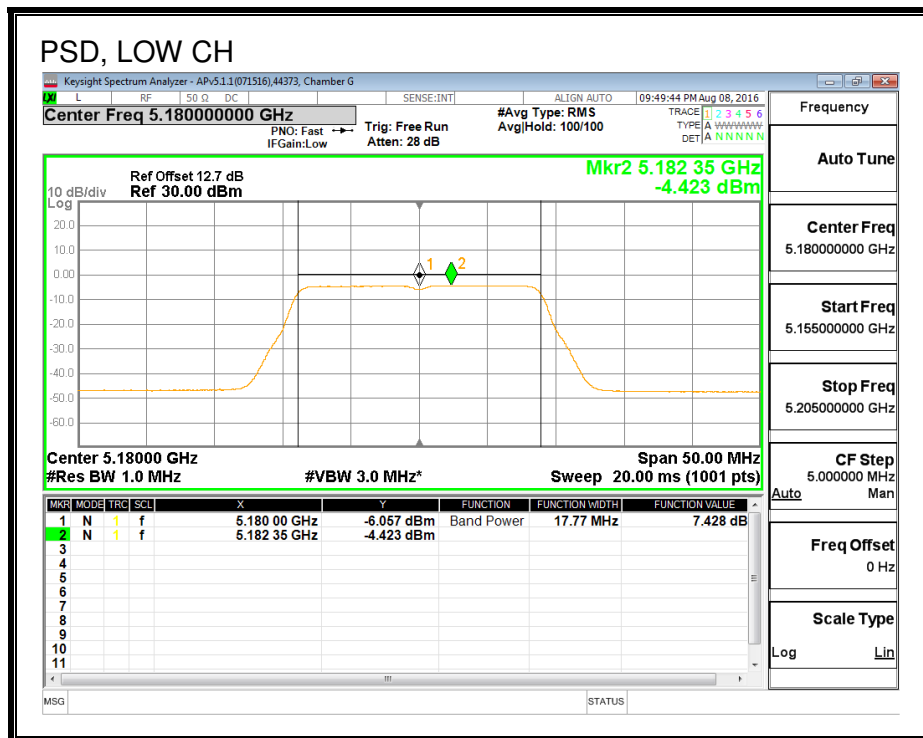

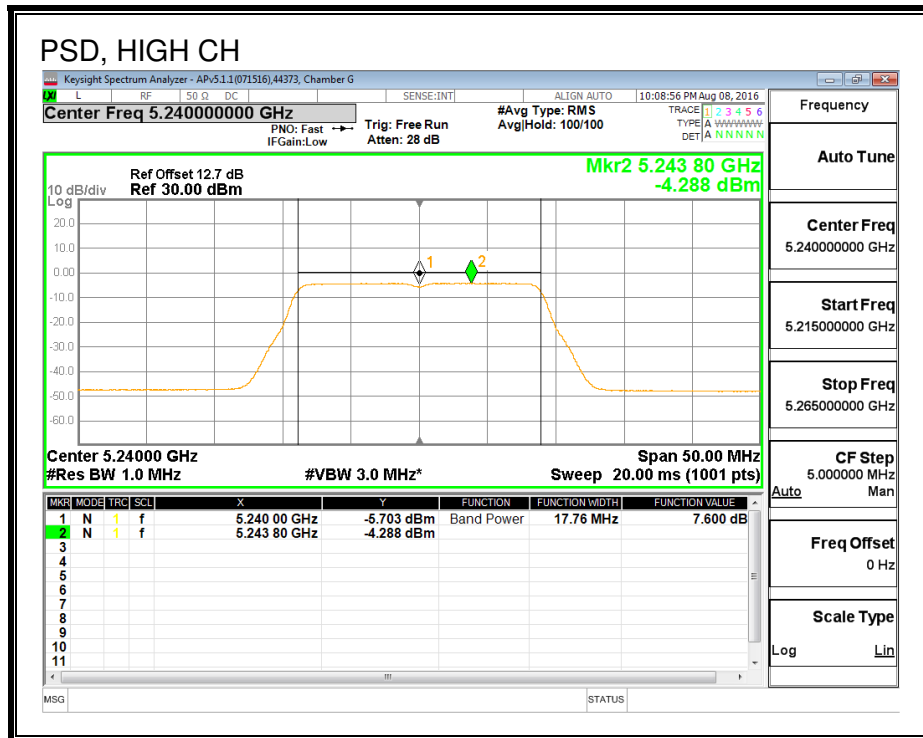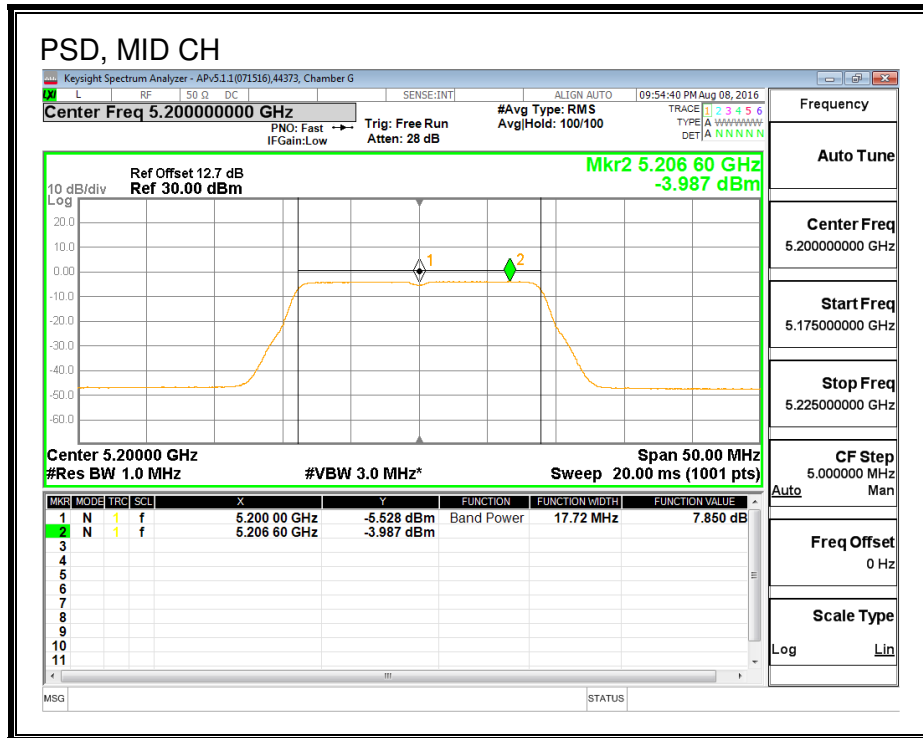

8.5. 802.11ac VHT20 2Tx BEAM FORMING MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	22.13	21.91
Mid	5200	22.07	21.95
High	5240	22.17	21.88



26 DB BANDWIDTH, CHAIN 0

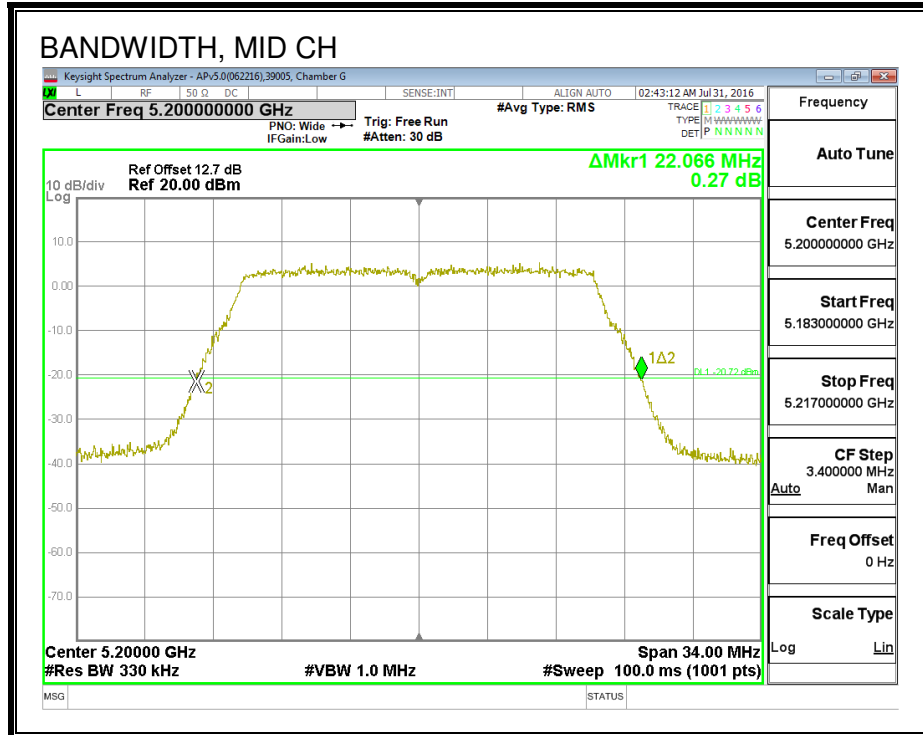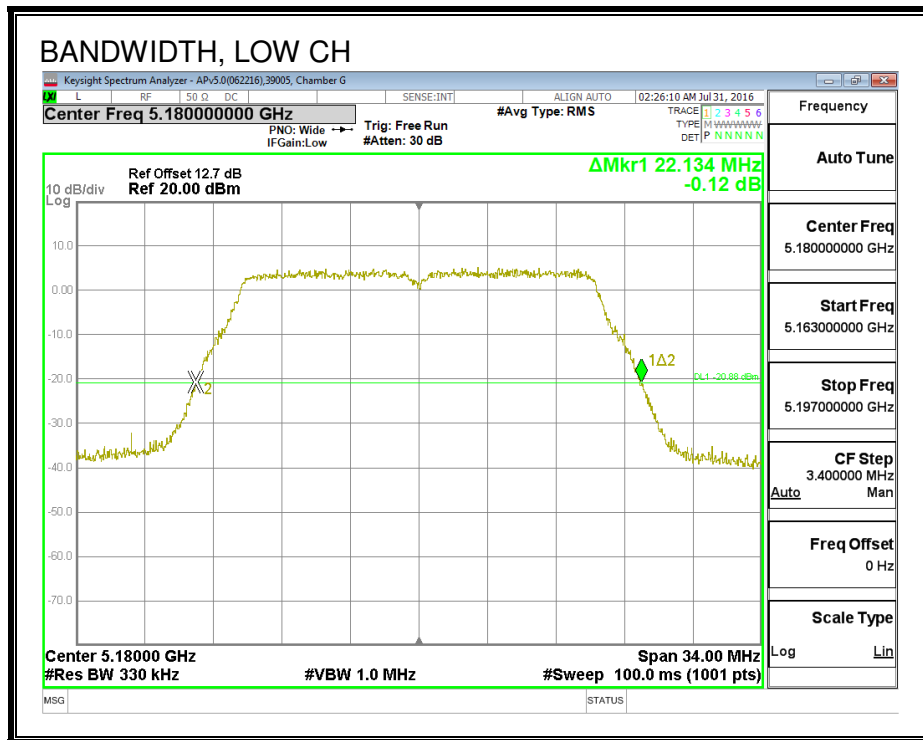

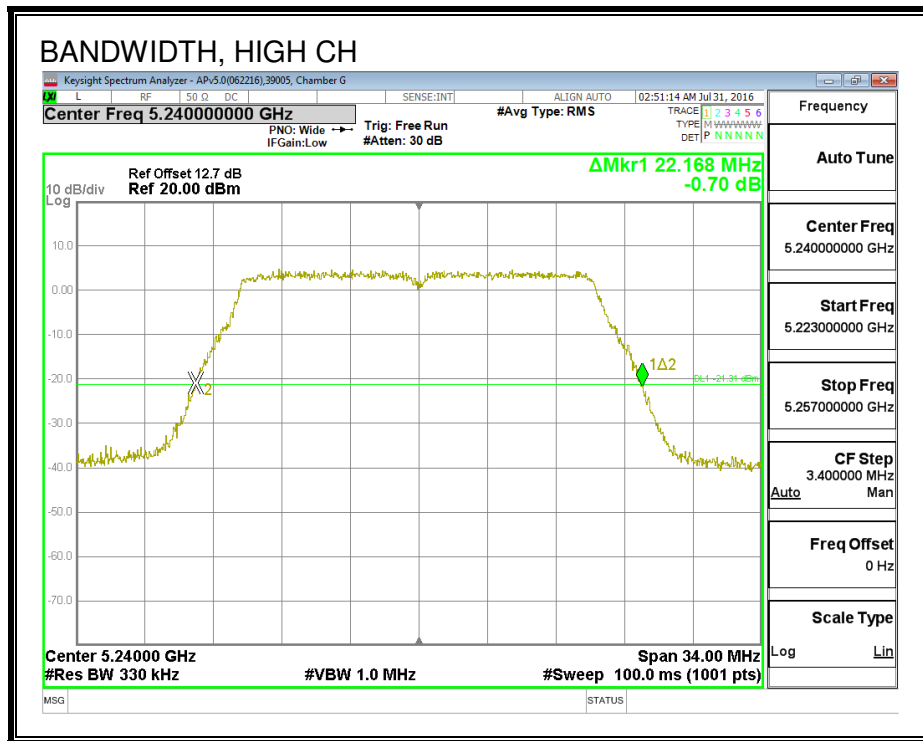

26 DB BANDWIDTH, CHAIN 1

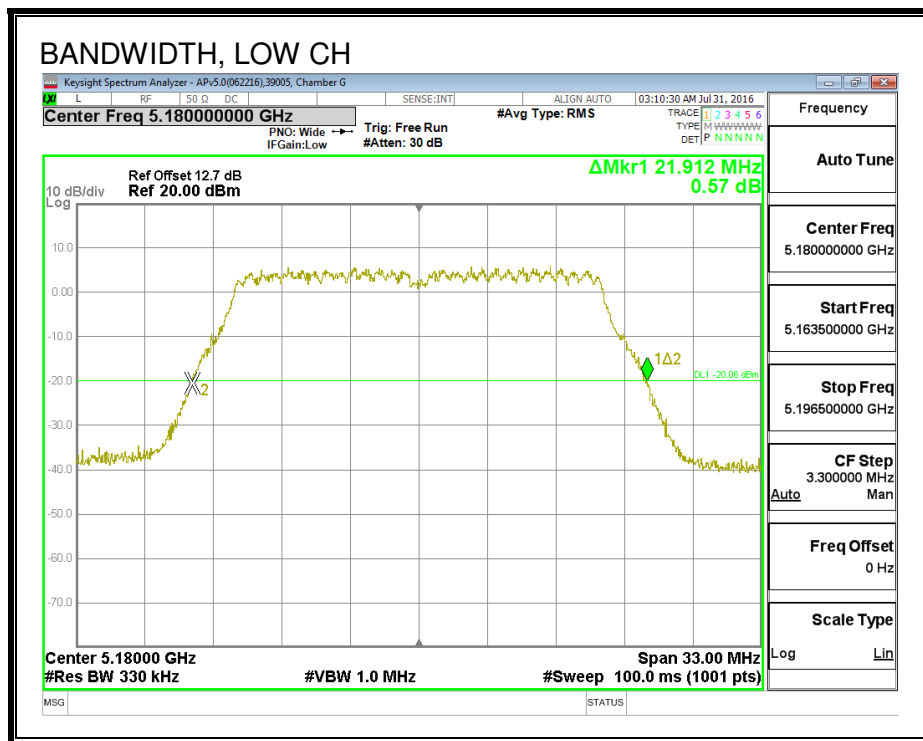

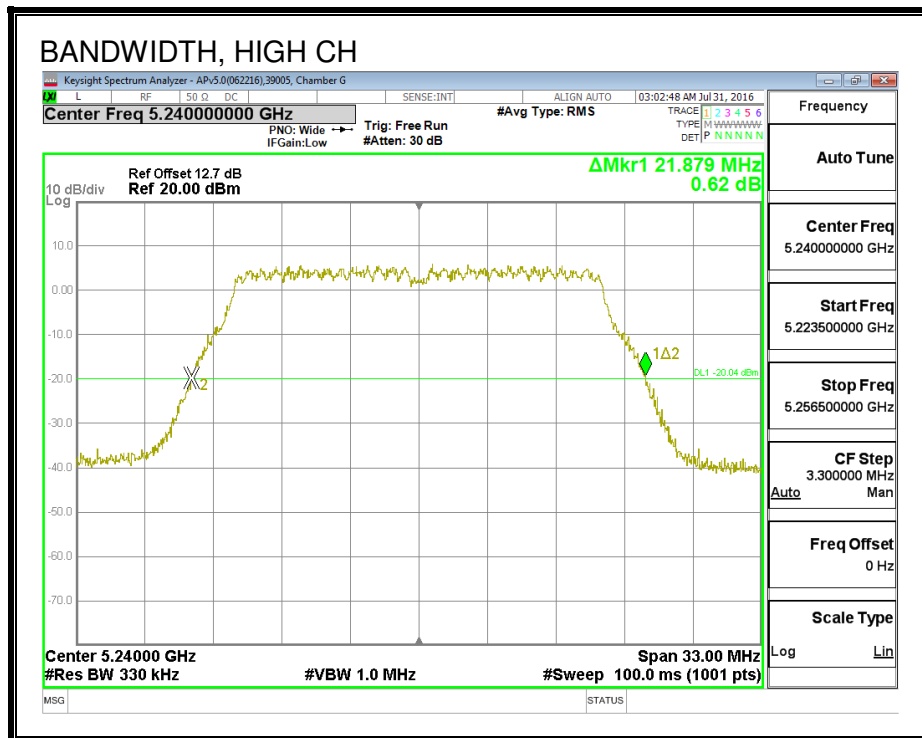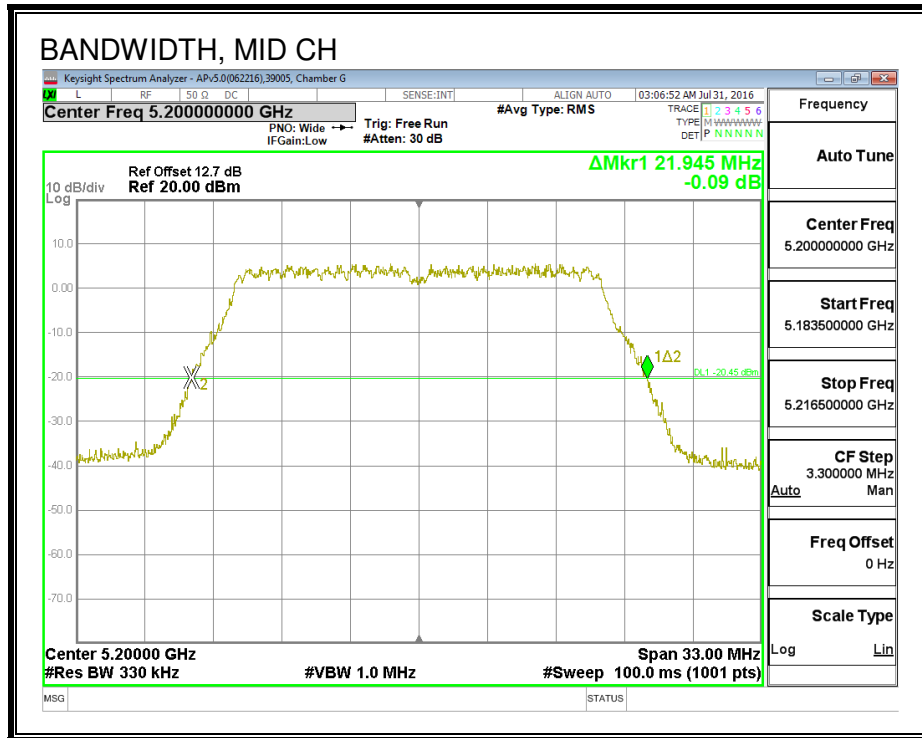

8.5.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.893	17.893
Mid	5200	17.710	17.761
High	5240	17.853	17.783



99% BANDWIDTH, CHAIN 0

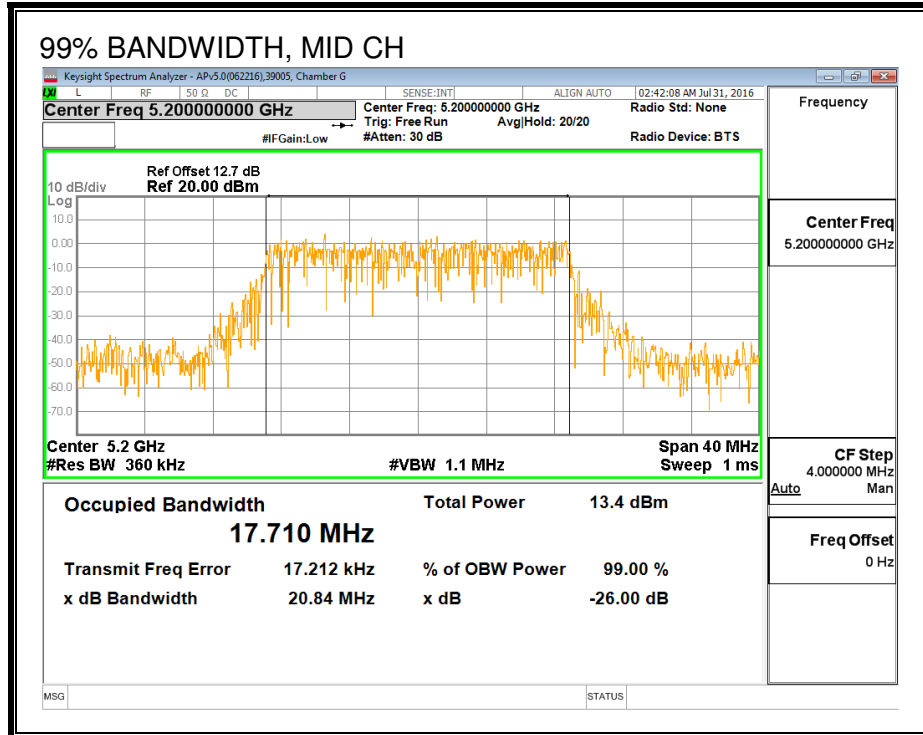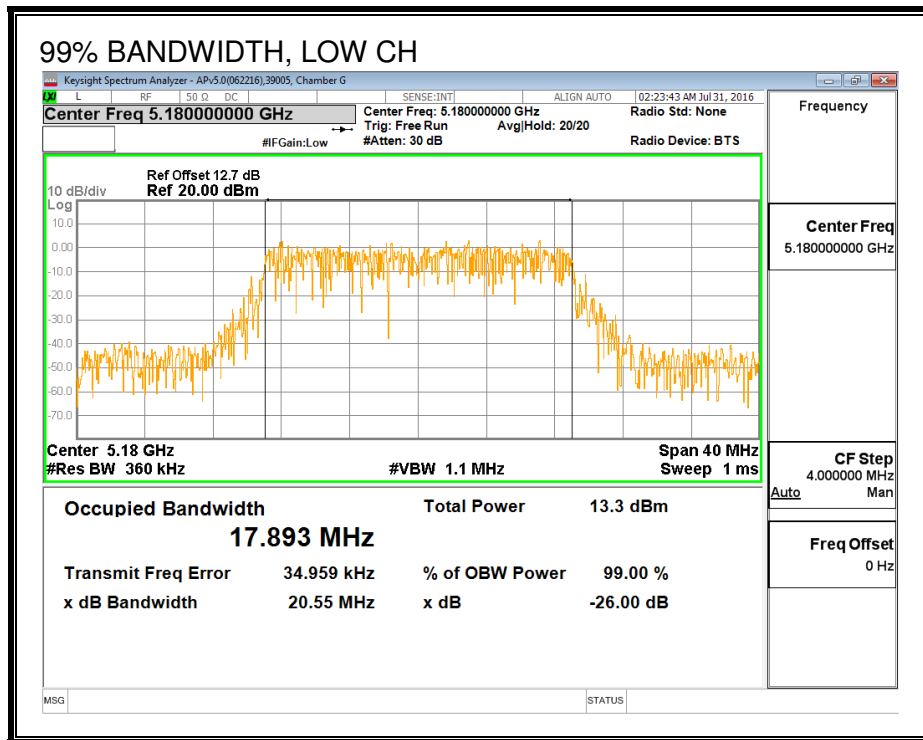

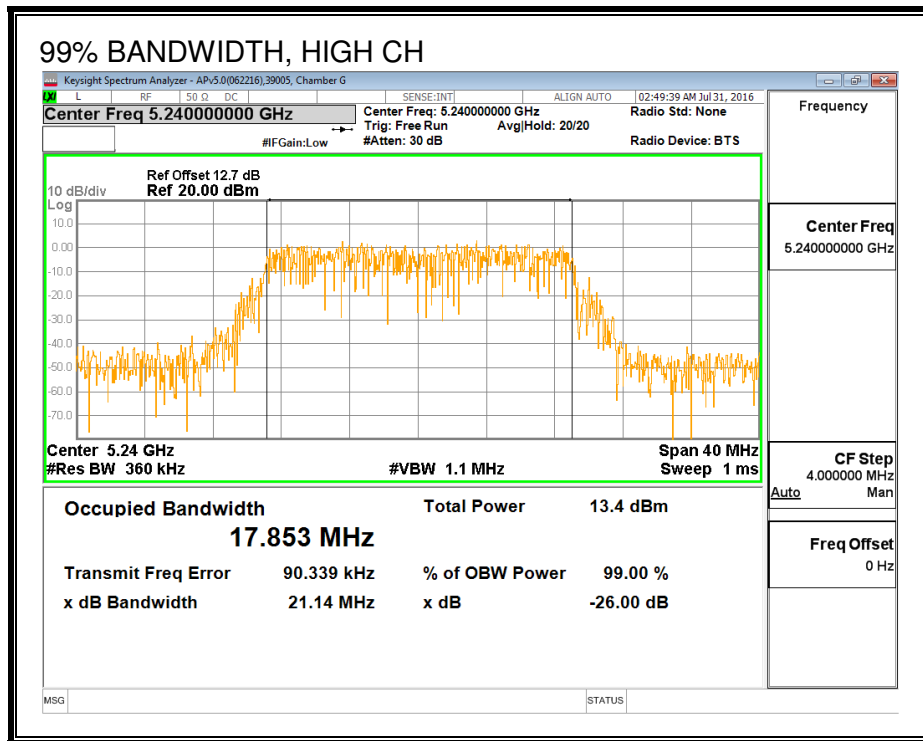

99% BANDWIDTH, CHAIN 1

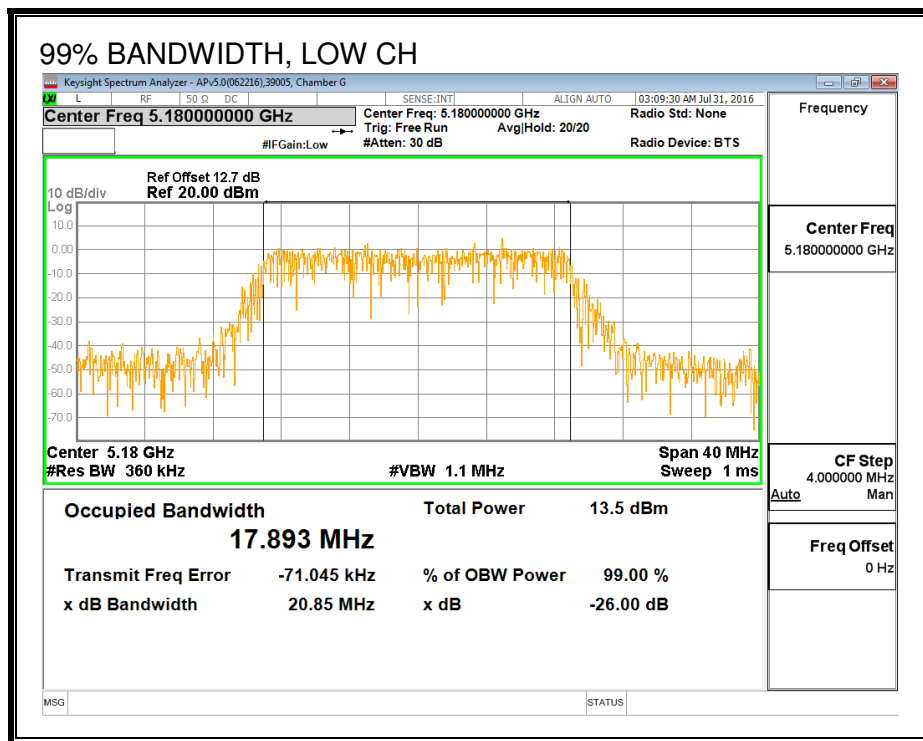

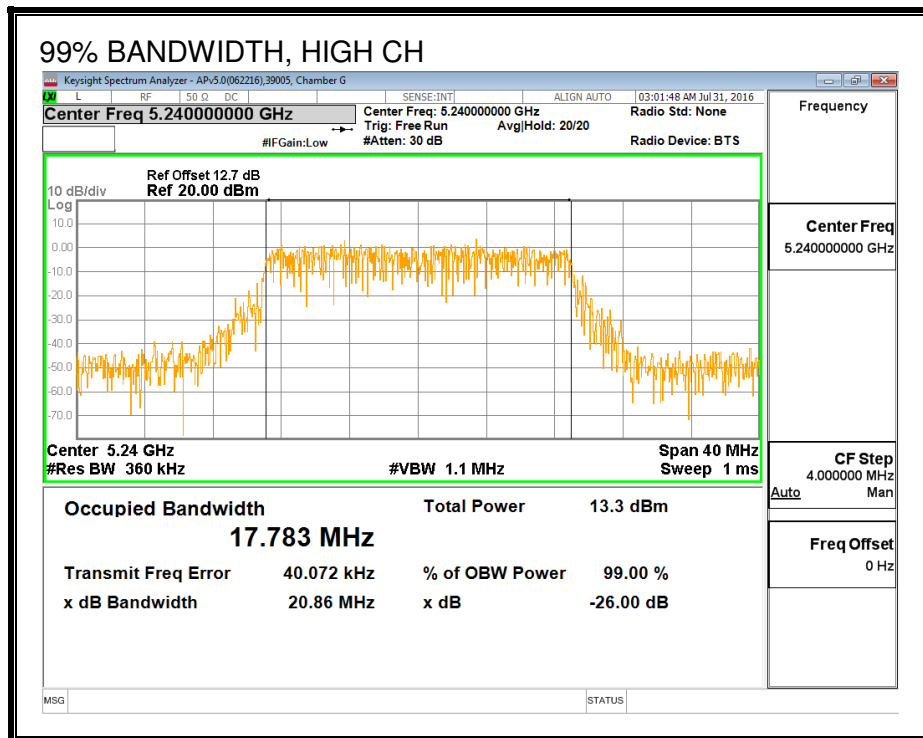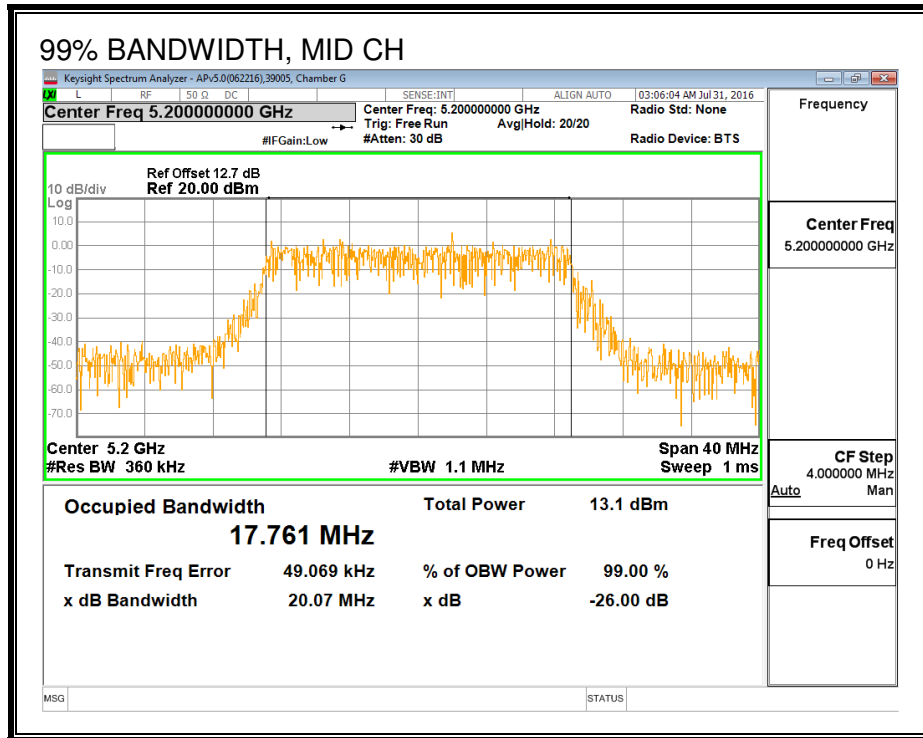

8.5.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	11.92	11.90	14.92
Mid	5200	11.87	11.89	14.89
High	5240	11.95	11.92	14.95

8.5.4. OUTPUT POWER AND PSD (FCC)

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.60	7.00	9.81

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	9.81	9.81	20.19	7.19
Mid	5200	9.81	9.81	20.19	7.19
High	5240	9.81	9.81	20.19	7.19

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.92	11.90	14.93	20.19	-5.26
Mid	5200	11.87	11.89	14.88	20.19	-5.31
High	5240	11.95	11.92	14.96	20.19	-5.23

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	-0.33	-0.61	2.64	7.19	-4.55
Mid	5200	-0.05	-0.19	2.99	7.19	-4.20
High	5240	-0.41	-0.24	2.79	7.19	-4.40



PSD, CHAIN 0

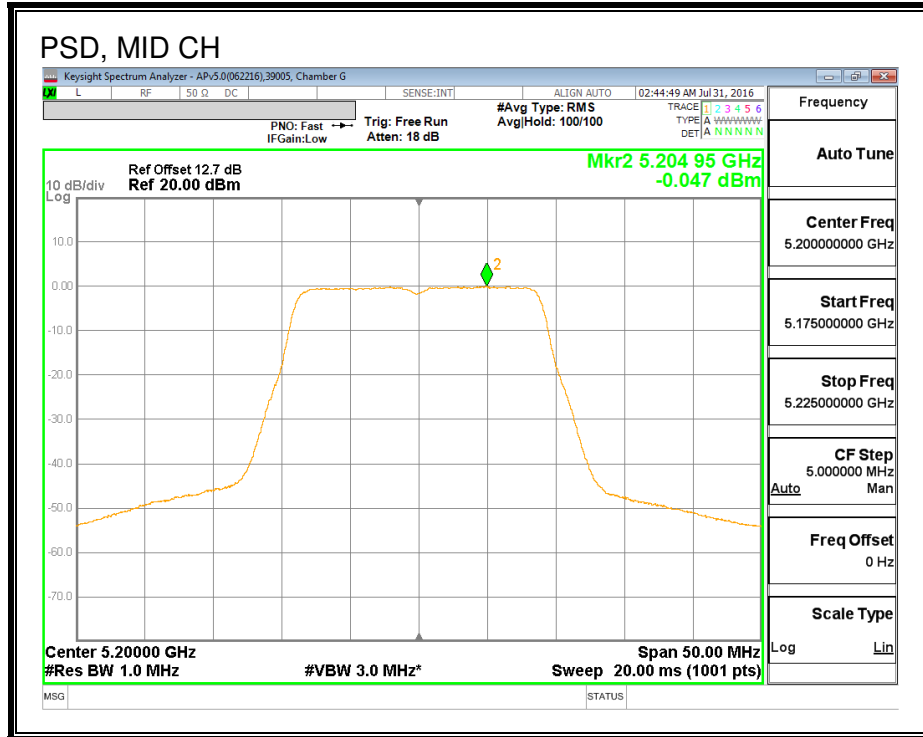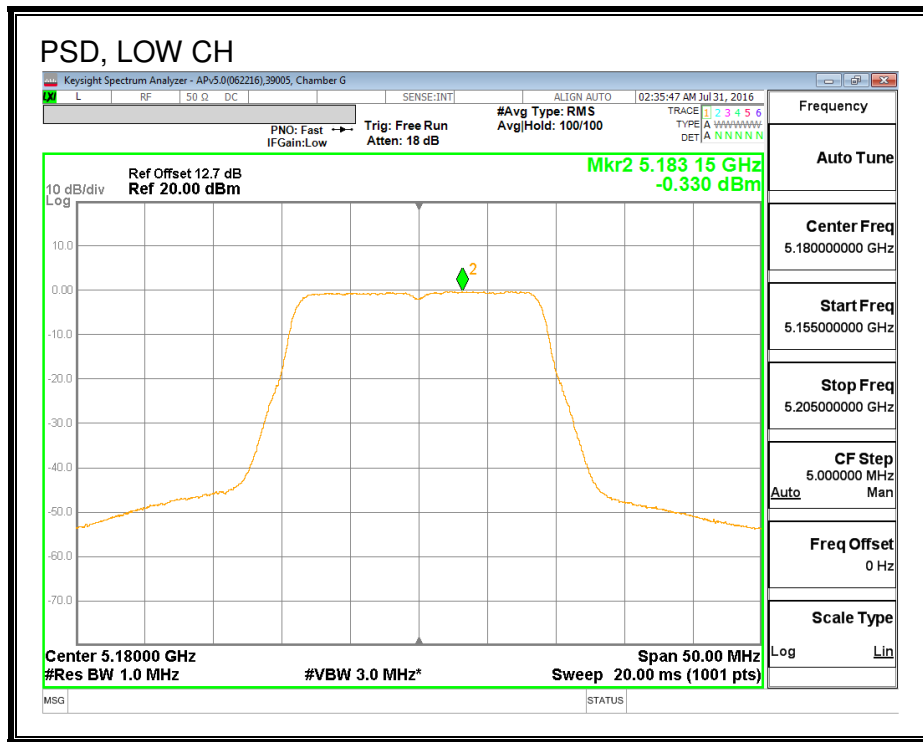

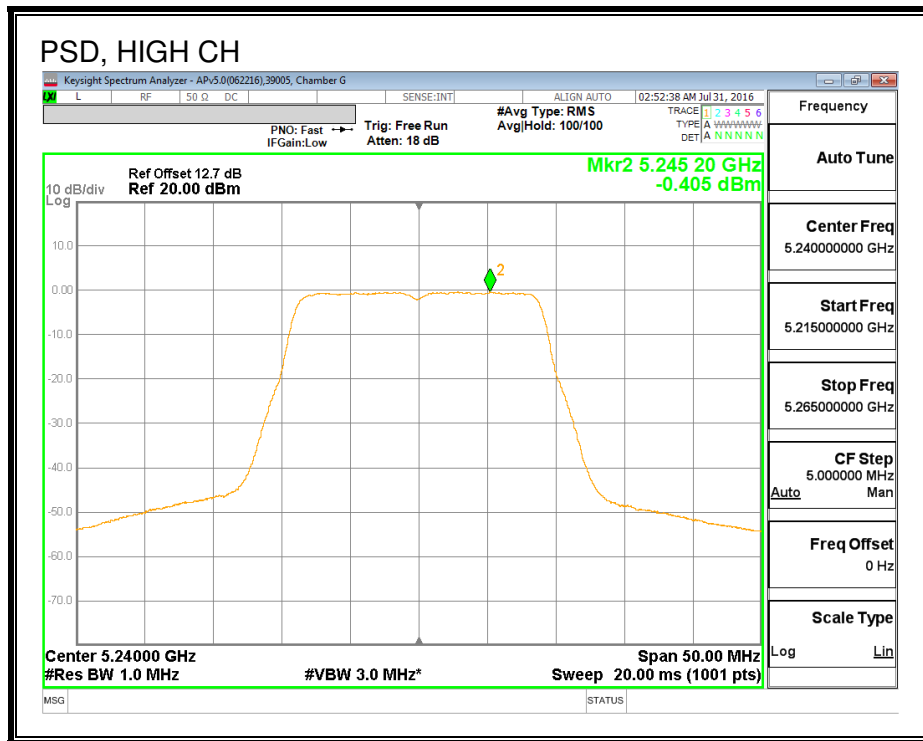

PSD, CHAIN 1

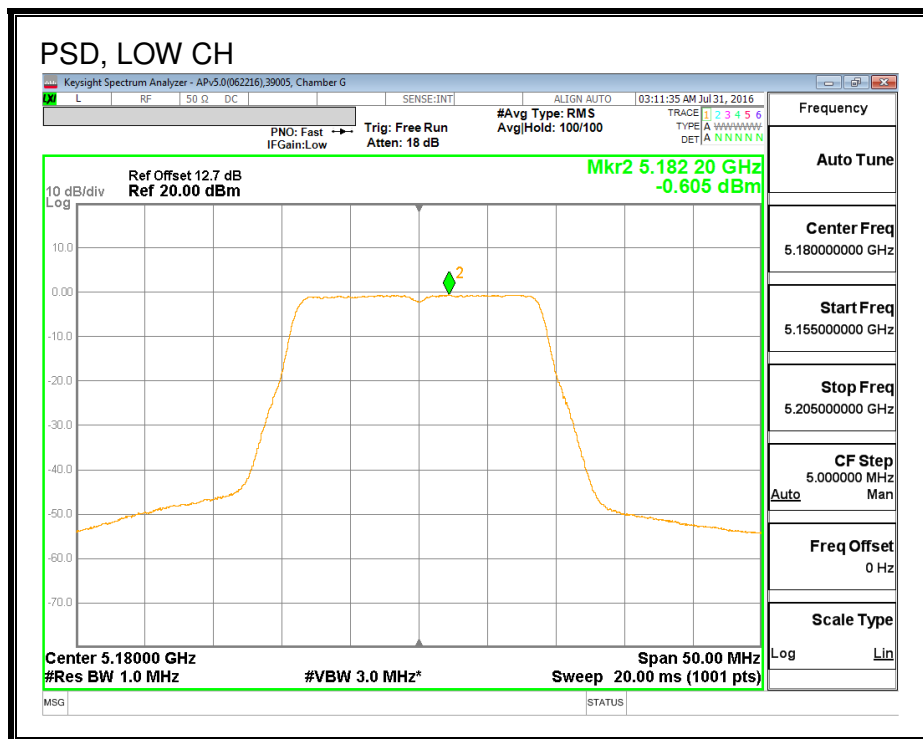

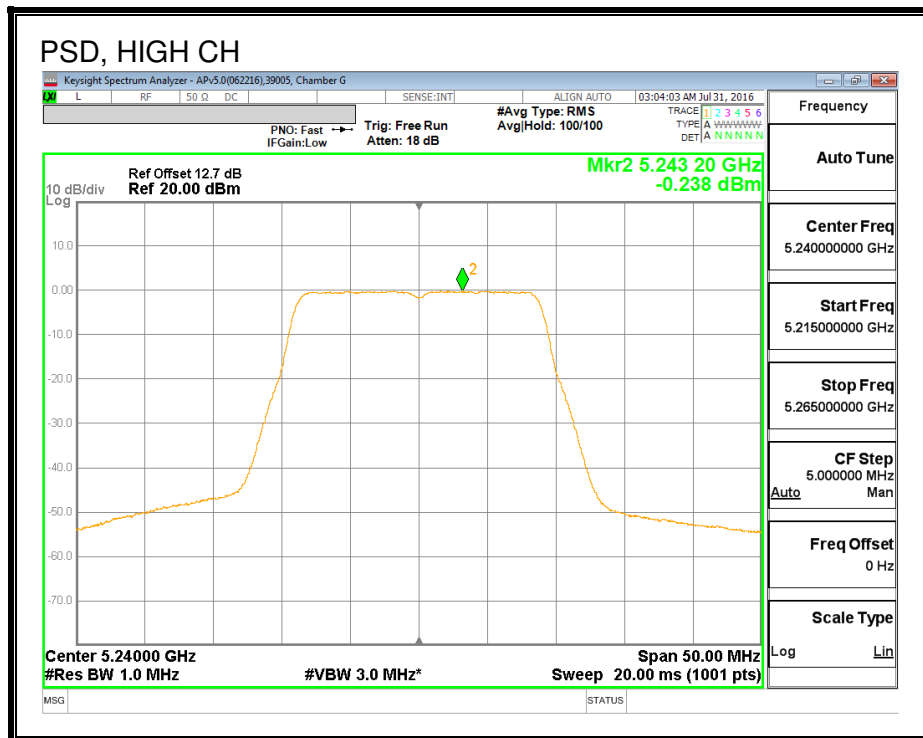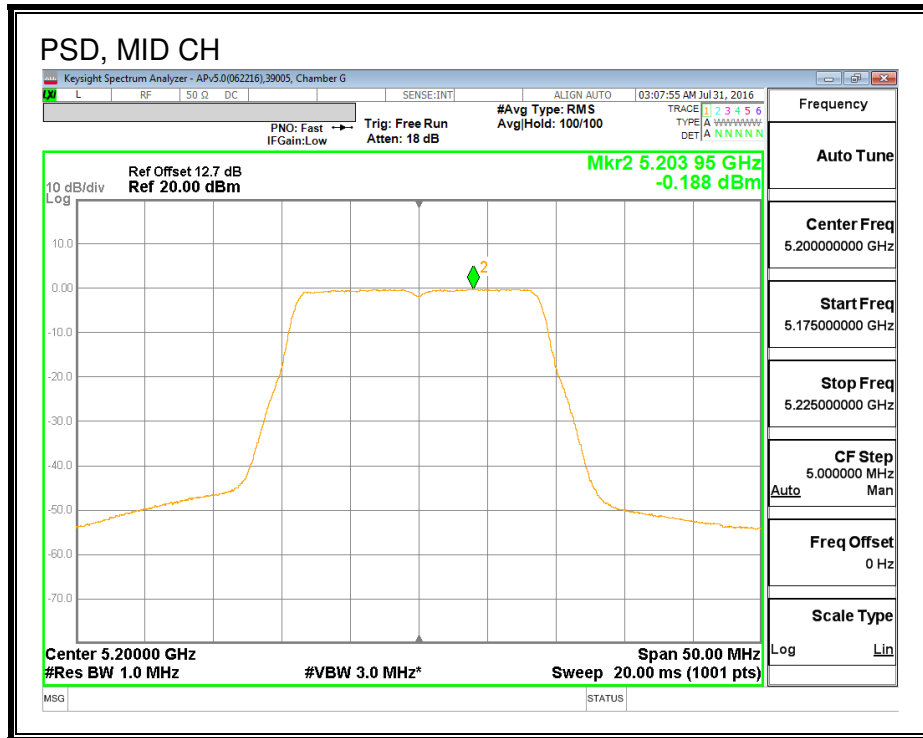

8.5.5. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39005	Date:	7/31/16
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	4.92	4.90	7.92
Mid	5200	4.97	4.93	7.96
High	5240	4.90	4.88	7.90

8.5.6. OUTPUT POWER AND PSD (IC)

LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.60	7.00	9.81

RESULTS

ID:	39005	Date:	7/31/16
------------	-------	--------------	---------

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5180	17.89	9.81	9.81
Mid	5200	17.71	9.81	9.81
High	5240	17.78	9.81	9.81

Limits

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
Low	5180	22.53	12.72	10.00	0.19
Mid	5200	22.48	12.67	10.00	0.19
High	5240	22.50	12.69	10.00	0.19

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	4.92	4.90	7.92	12.72	-4.80
Mid	5200	4.97	4.93	7.96	12.67	-4.71
High	5240	4.90	4.88	7.90	12.69	-4.79

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	-0.50	0.04	2.89	0.19	2.70
Mid	5200	-0.34	-0.05	2.92	0.19	2.73
High	5240	-0.16	0.12	3.09	0.19	2.90



PSD, CHAIN 0

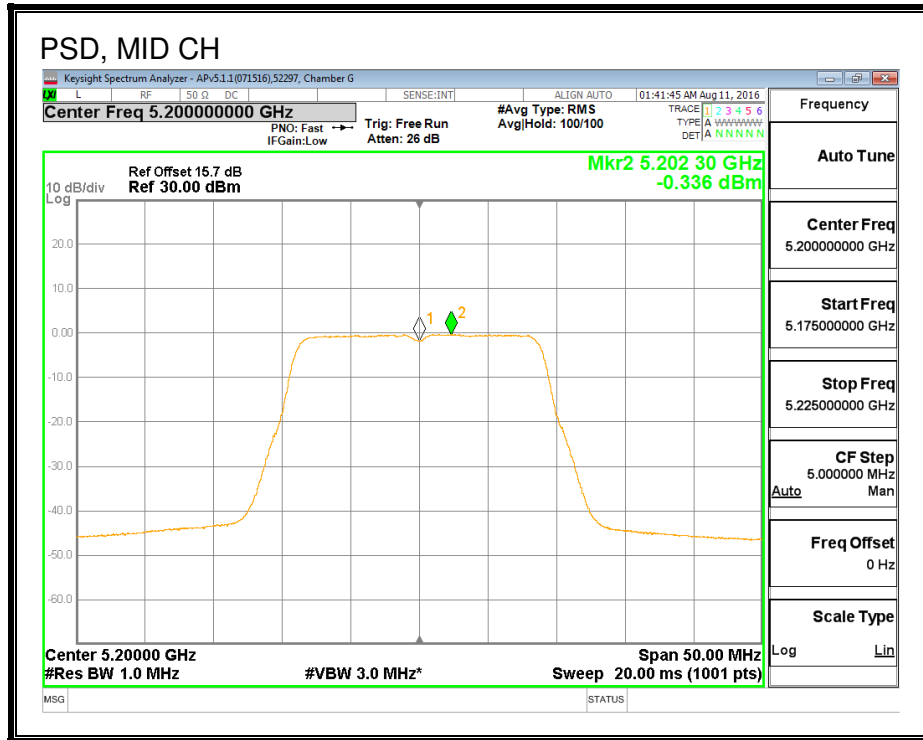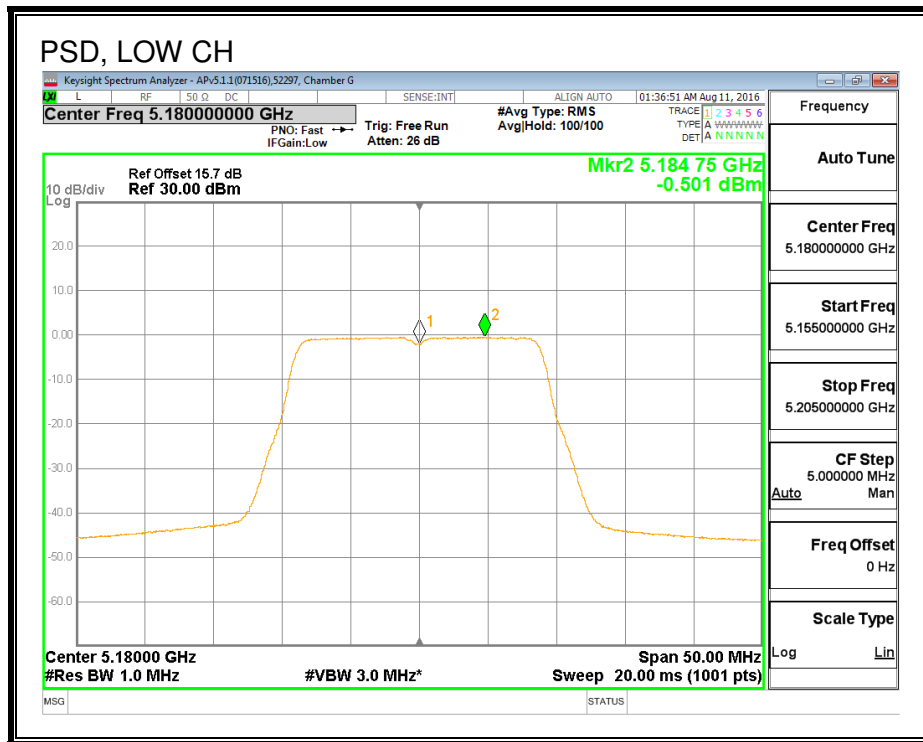

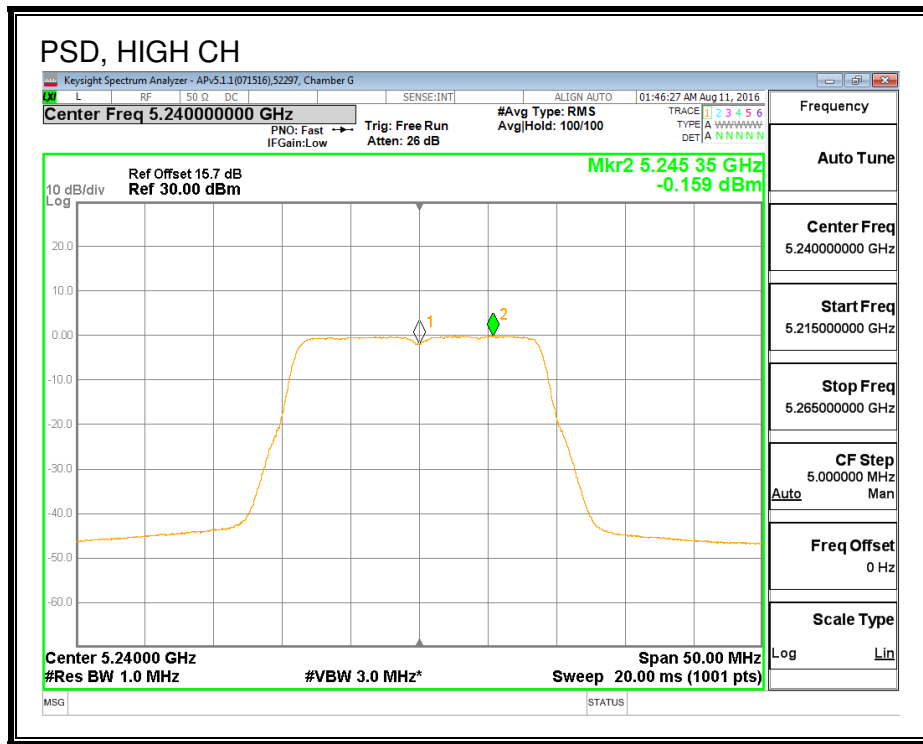

PSD, CHAIN 1

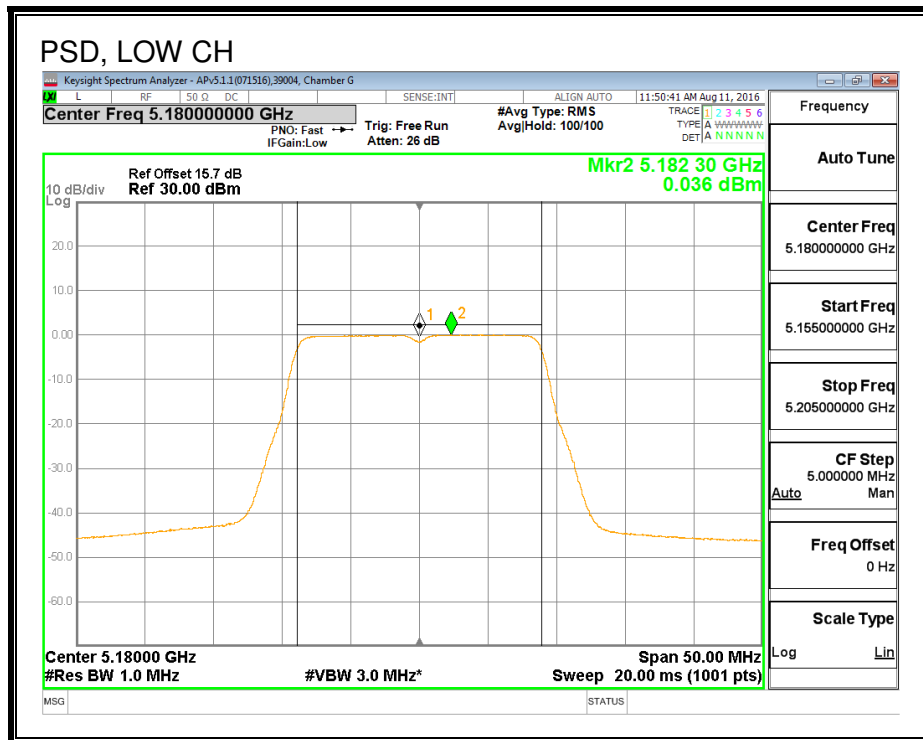

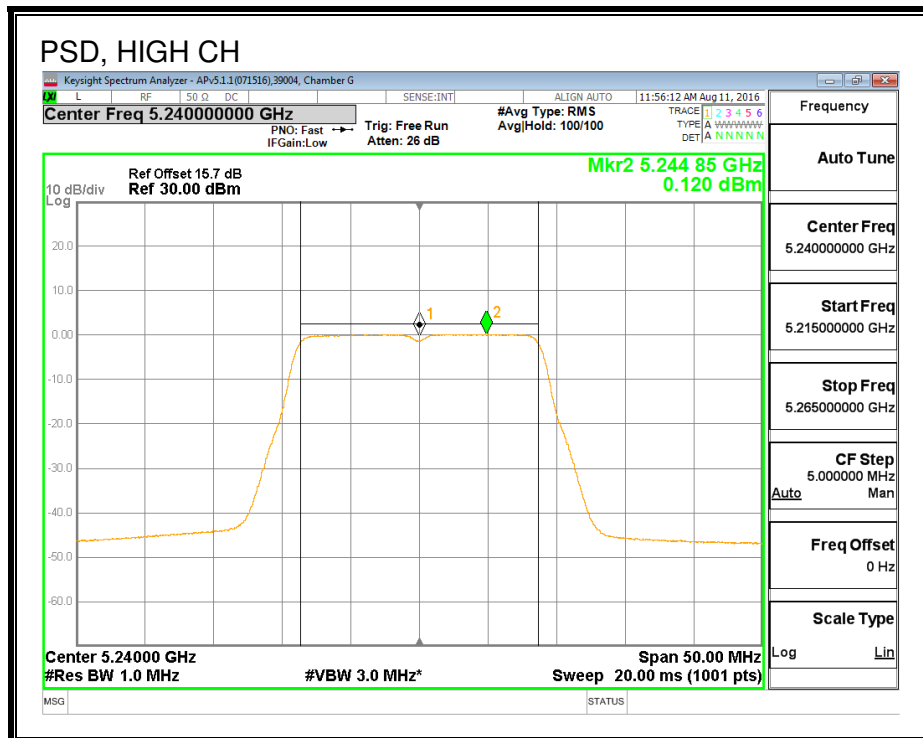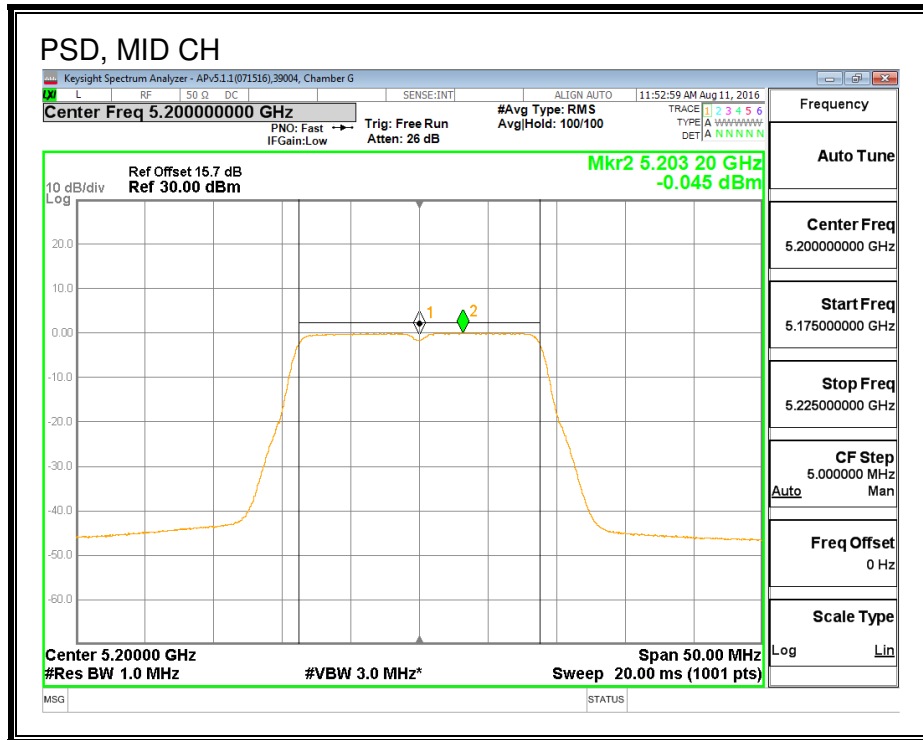

8.6. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.626
High	5230	40.734

26 dB BANDWIDTH

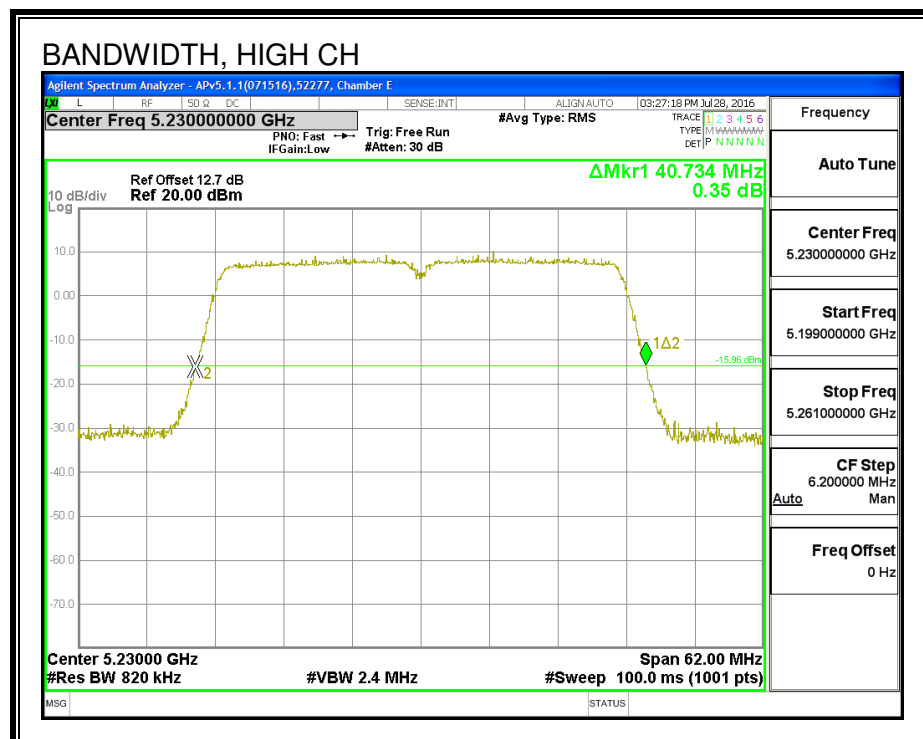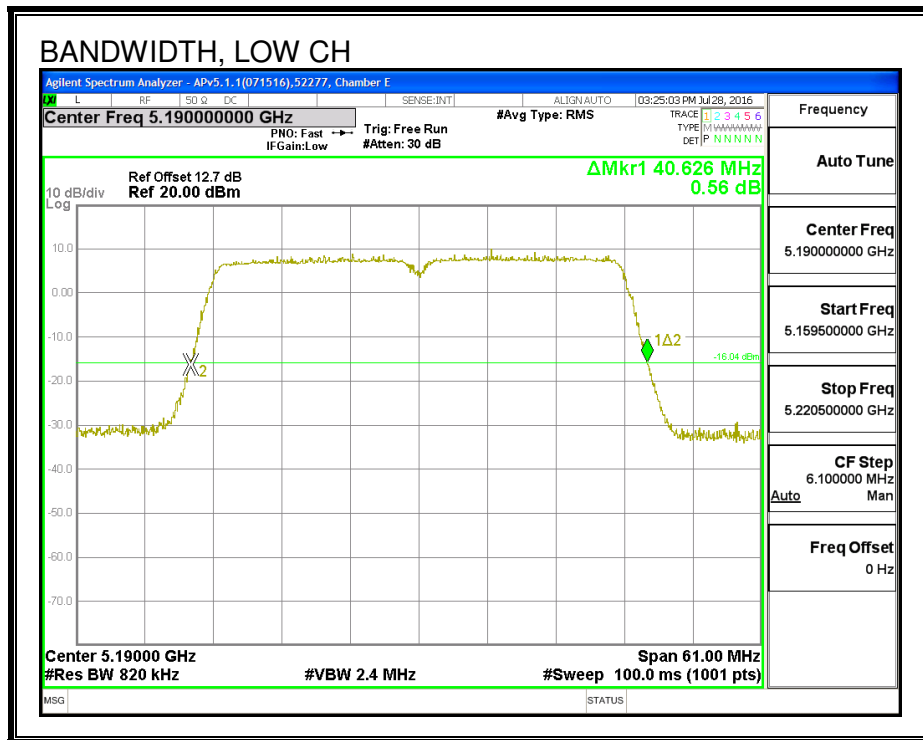

8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.429
High	5230	36.285

99% BANDWIDTH

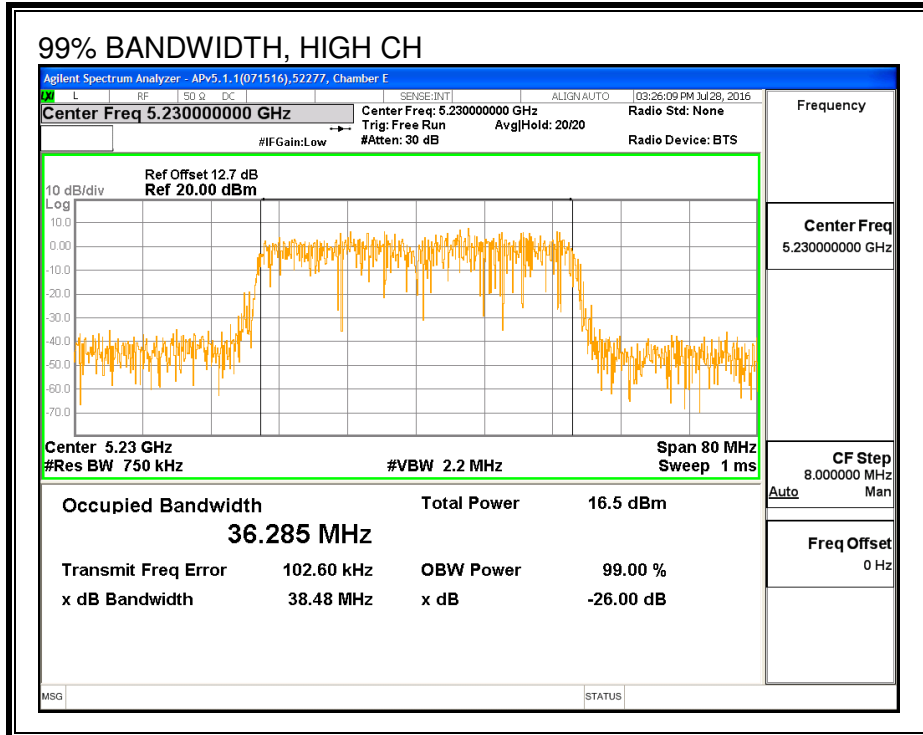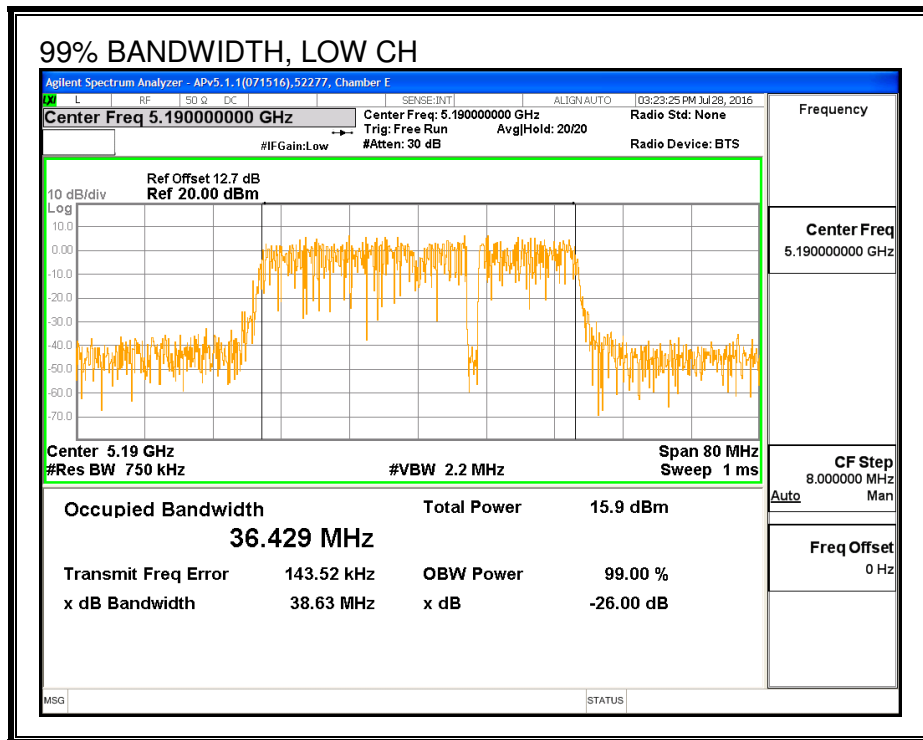

8.6.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.64
High	5230	13.67

8.6.4. OUTPUT POWER AND PSD (FCC)

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	6.60	6.60	23.40	10.40
High	5230	6.60	6.60	23.40	10.40

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.64	13.64	23.40	-9.76
High	5230	13.67	13.67	23.40	-9.73

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.99	-0.99	10.40	-11.39
High	5230	3.09	3.09	10.40	-7.31

PSD

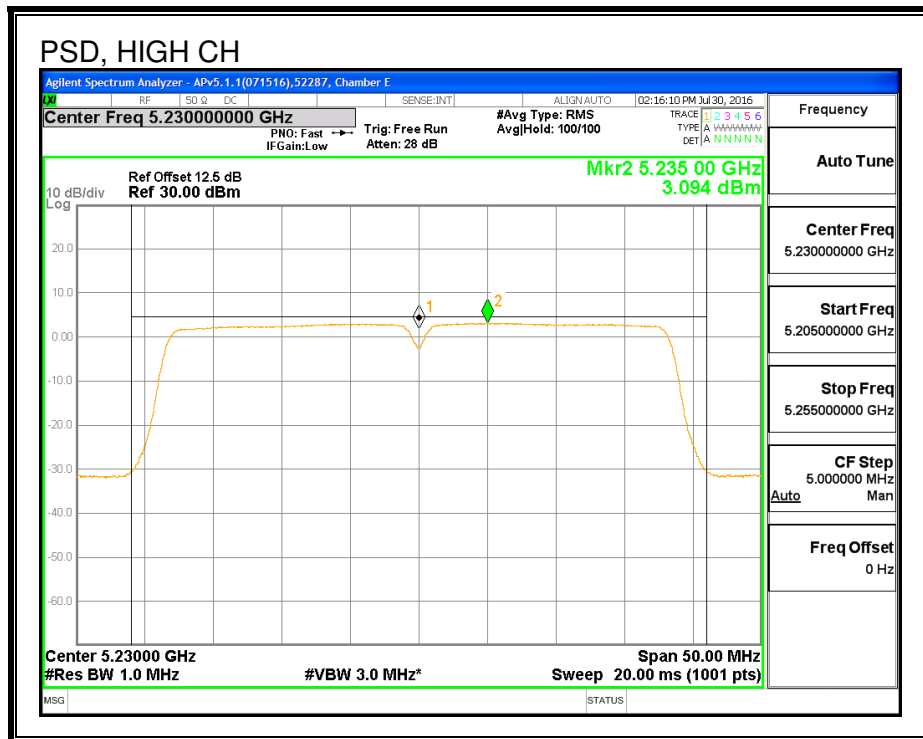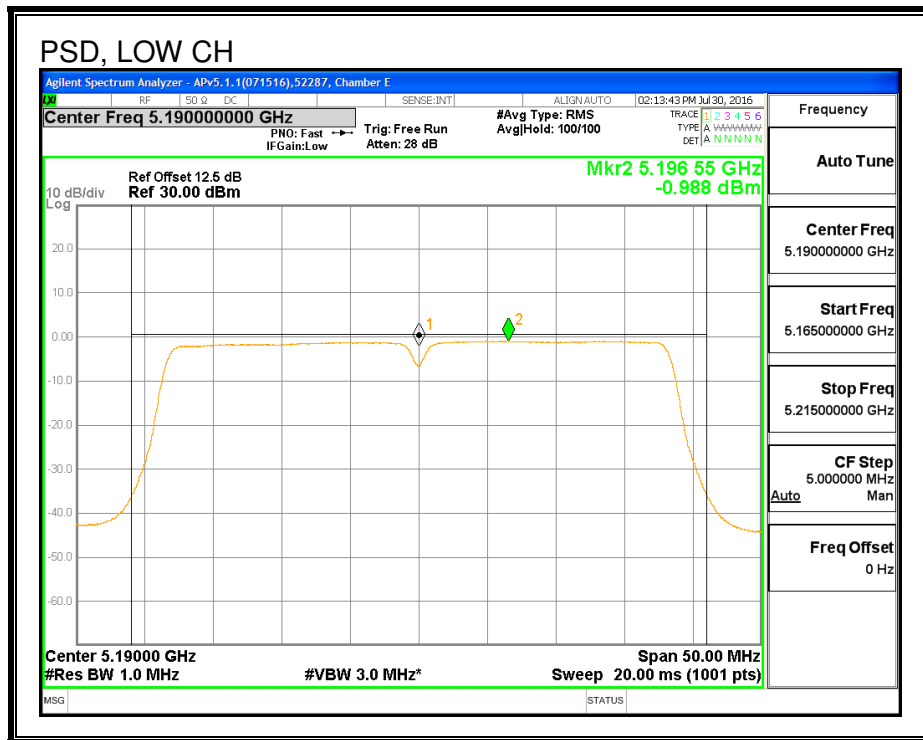

8.6.5. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.28
High	5230	13.35

8.6.6. OUTPUT POWER AND PSD (IC)

LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 99% BW (MHz)	Direction Gain (dBi)
Low	5190	36.43	6.60
High	5230	36.29	6.60

Limits

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
Low	5190	23.00	16.40	10.00	3.40
High	5230	23.00	16.40	10.00	3.40

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.28	13.28	16.40	-3.12
High	5230	13.35	13.35	16.40	-3.05

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-1.58	-1.58	3.40	-4.98
High	5230	-1.42	-1.42	3.40	-4.82

PSD

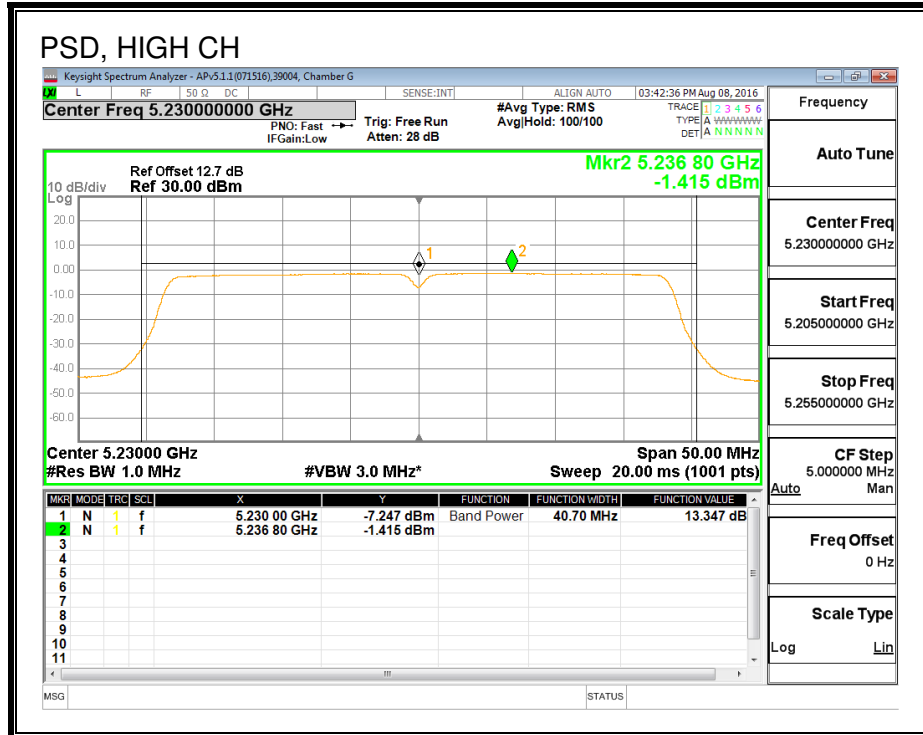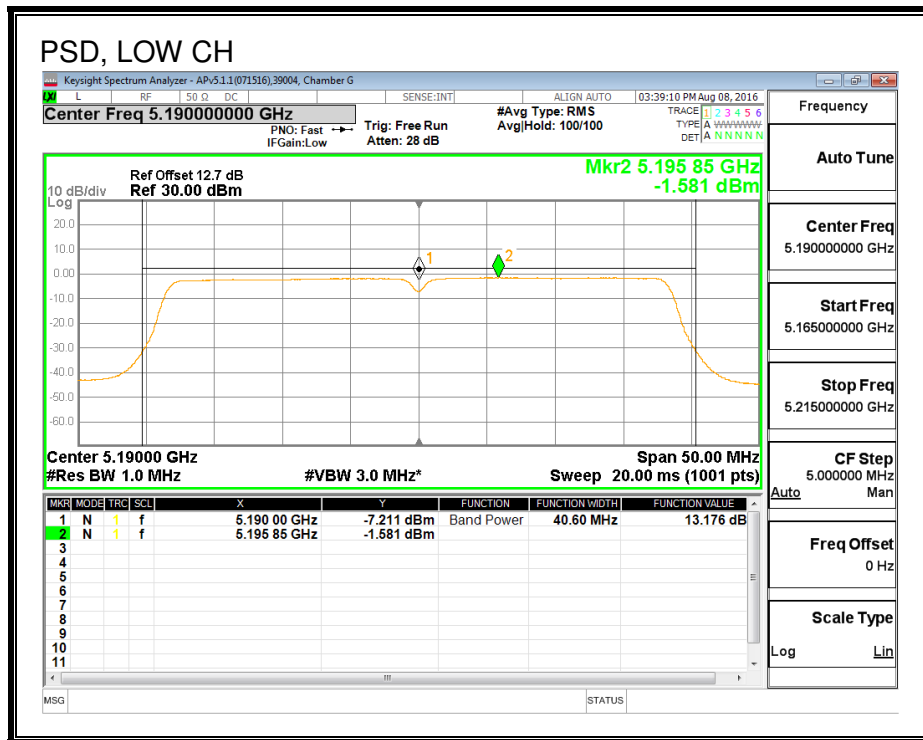

8.7. 802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND

8.7.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.982
High	5230	40.734

26 dB BANDWIDTH

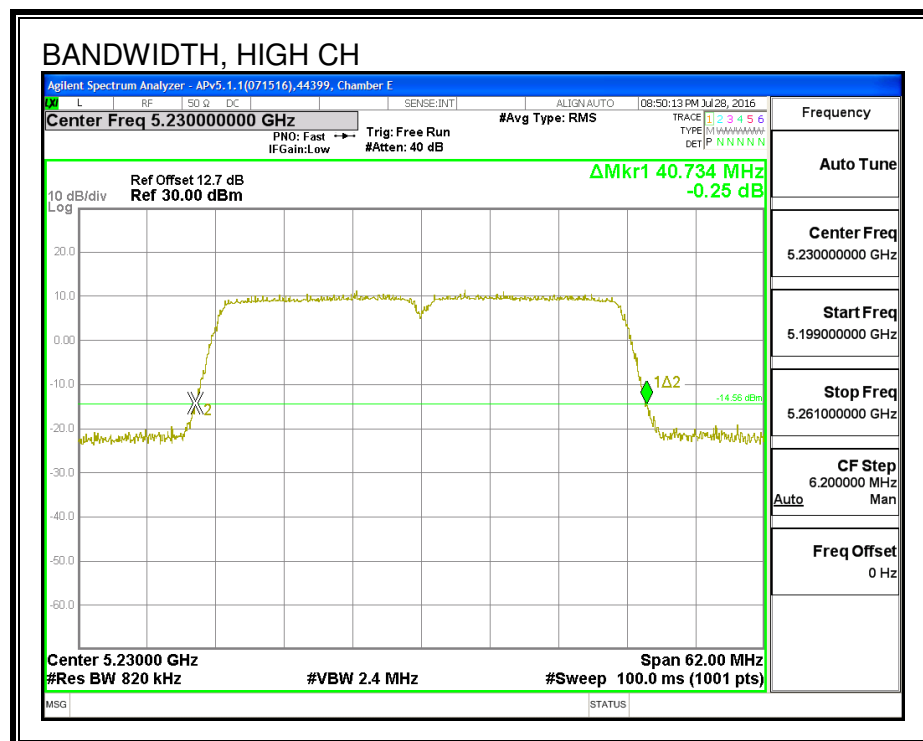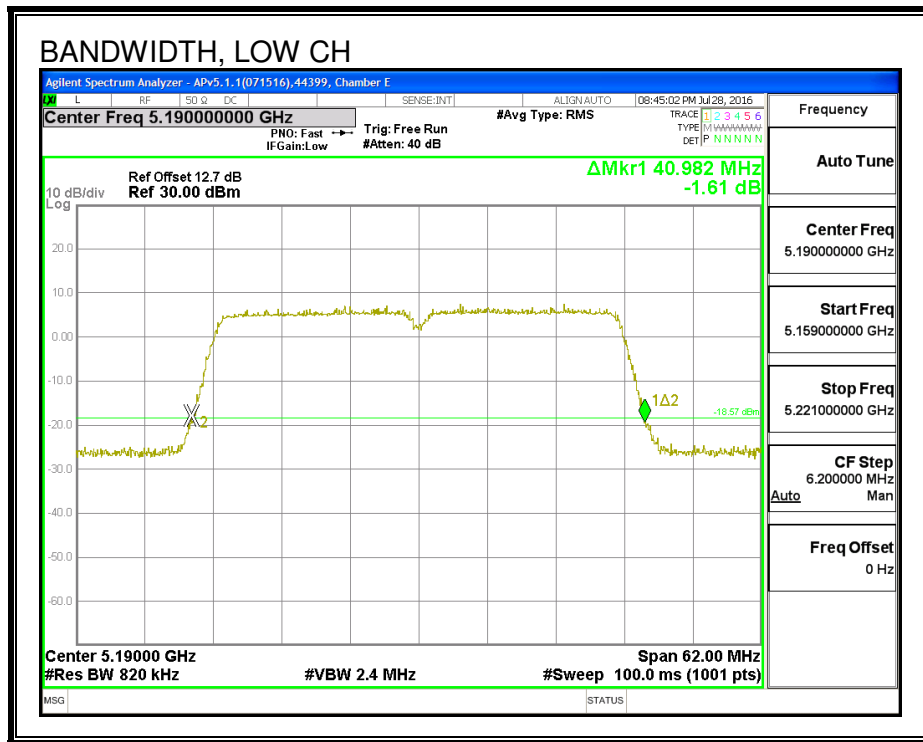

8.7.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.015
High	5230	36.591

99% BANDWIDTH

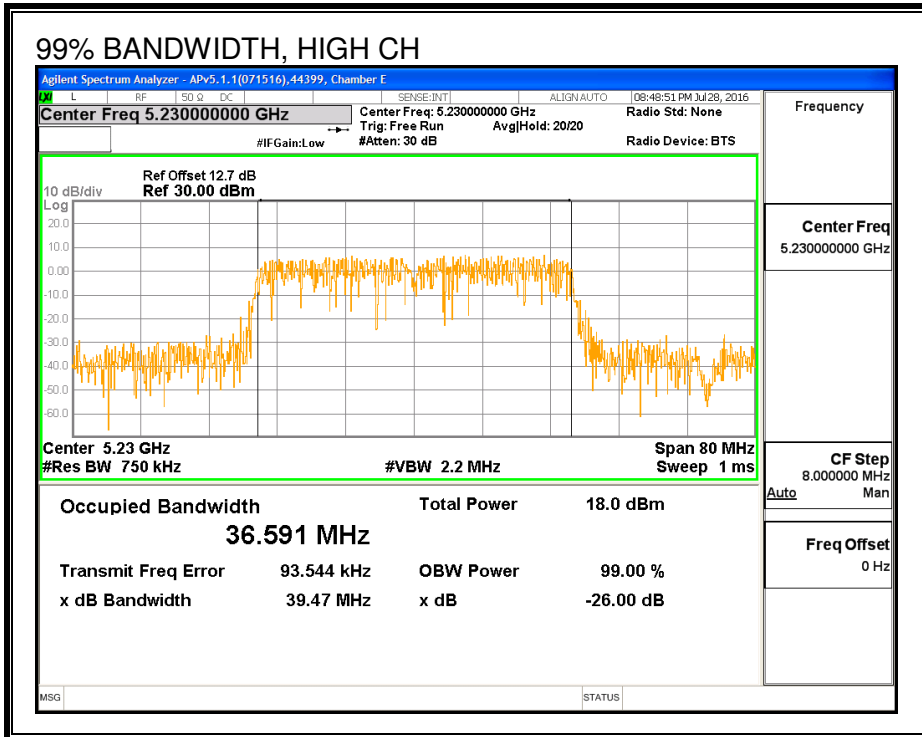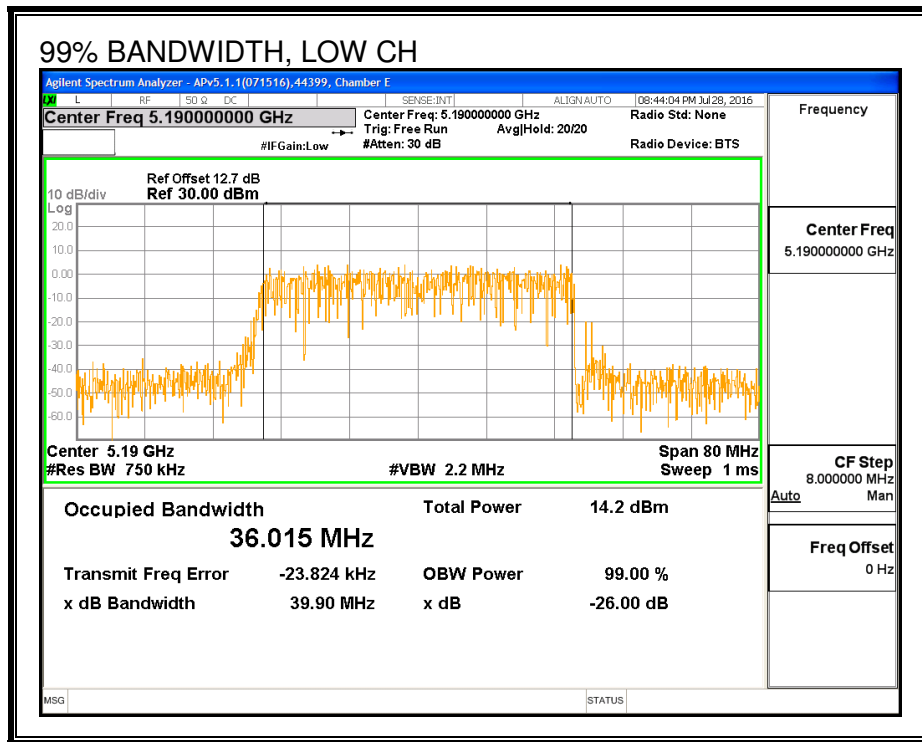

8.7.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.70
High	5230	13.68

8.7.4. OUTPUT POWER AND PSD (FCC)

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	7.00	7.00	23.00	10.00
High	5230	7.00	7.00	23.00	10.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.70	13.70	23.00	-9.30
High	5230	13.68	13.68	23.00	-9.32

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-1.11	-1.11	10.00	-11.11
High	5230	2.80	2.80	10.00	-7.21

PSD

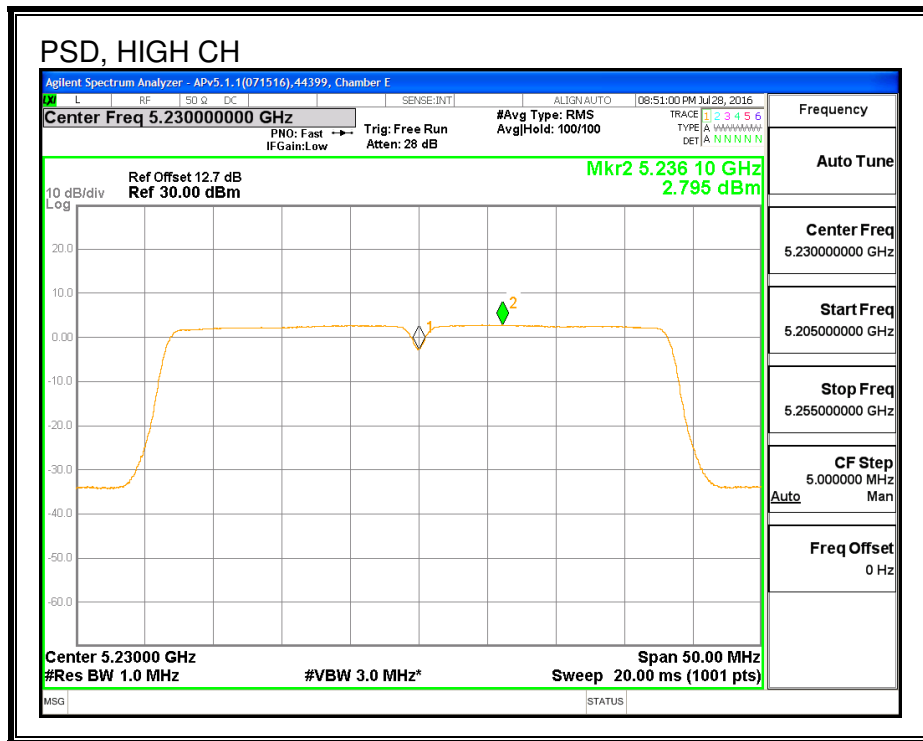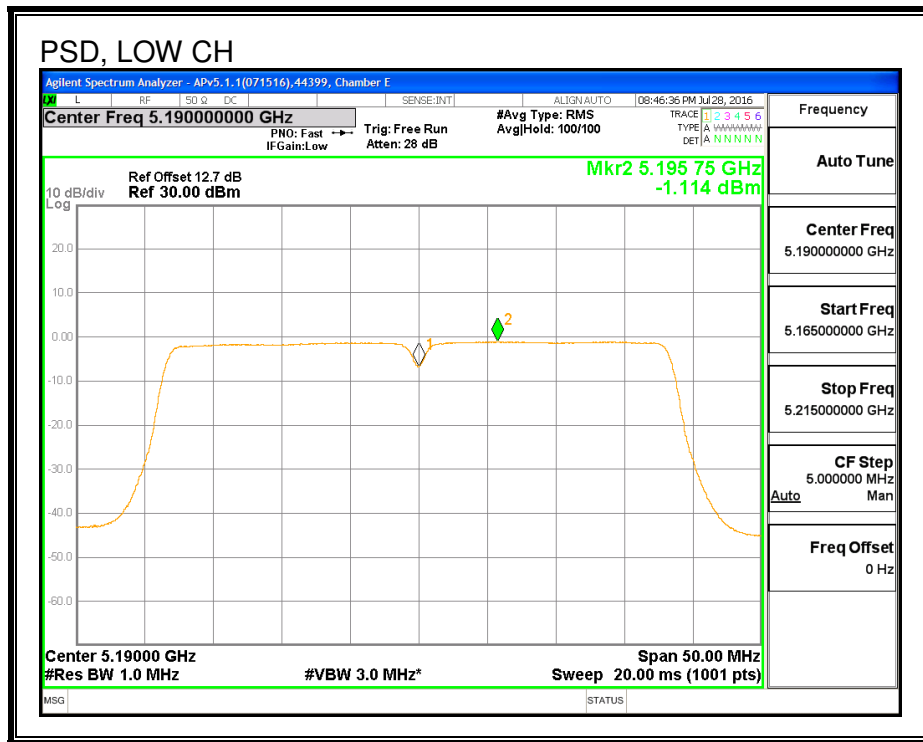

8.7.5. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.41
High	5230	13.32

8.7.6. OUTPUT POWER AND PSD (IC)

LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 99% BW (MHz)	Direction Gain (dBi)
Low	5190	36.02	7.00
High	5230	36.59	7.00

Limits

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
Low	5190	23.00	16.00	10.00	3.00
High	5230	23.00	16.00	10.00	3.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.41	13.41	16.00	-2.59
High	5230	13.32	13.32	16.00	-2.69

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-2.40	-2.40	3.00	-5.40
High	5230	-2.17	-2.17	3.00	-5.17

PSD

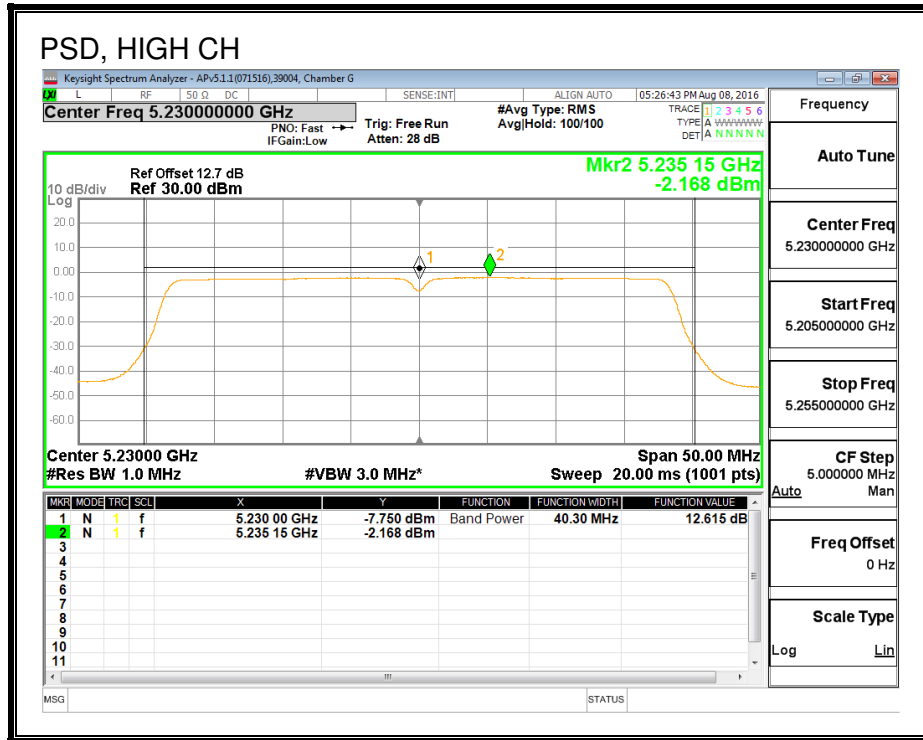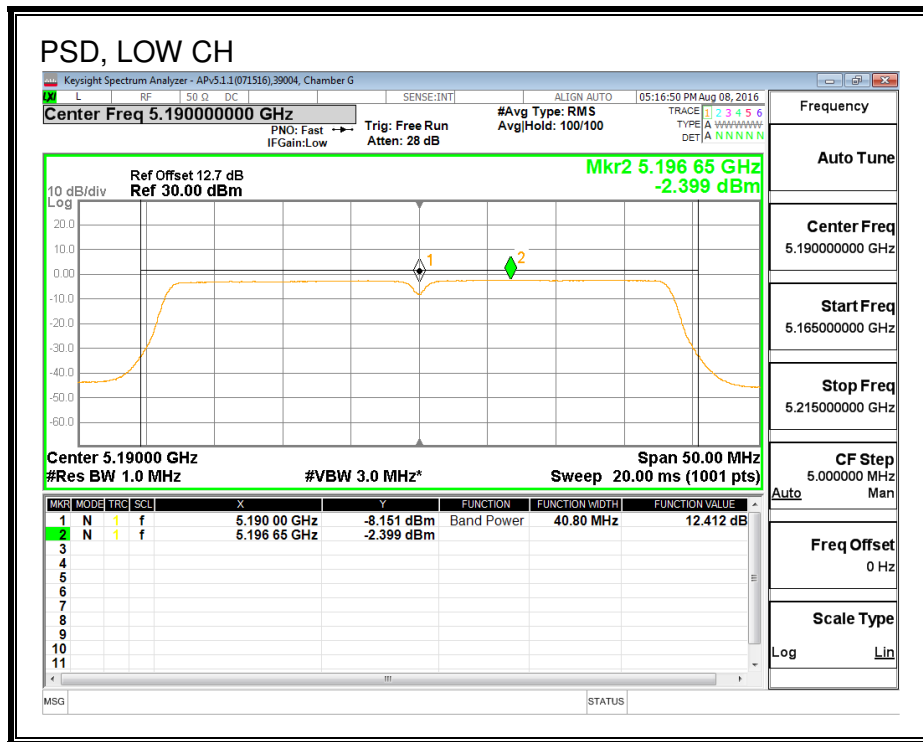

8.8. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND

8.8.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.858	41.230
High	5230	40.858	40.982

26 DB BANDWIDTH, CHAIN 0

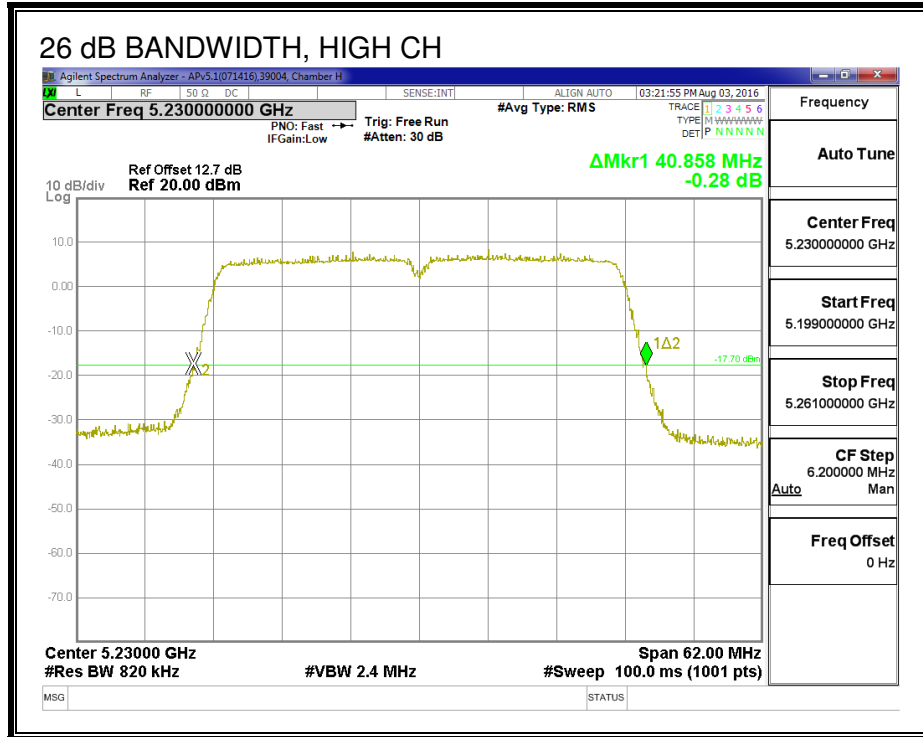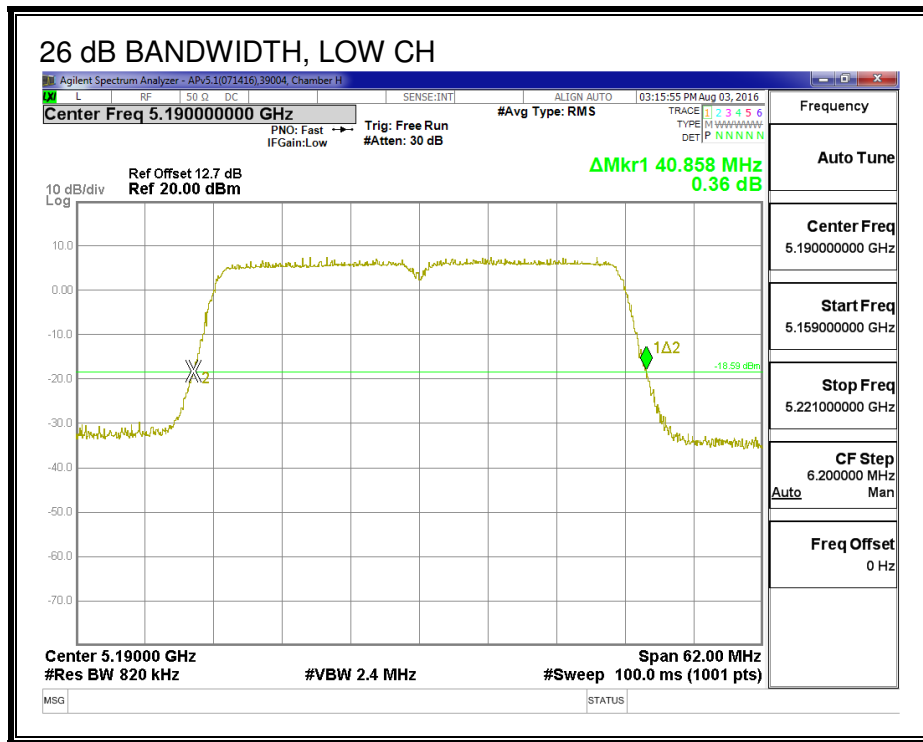

26 DB BANDWIDTH, CHAIN 1

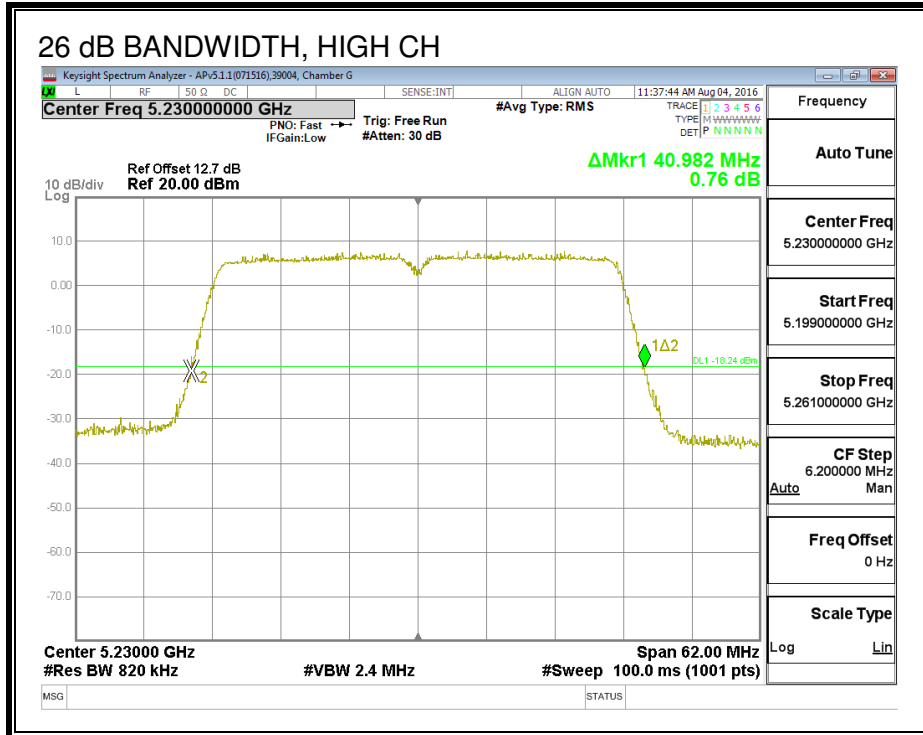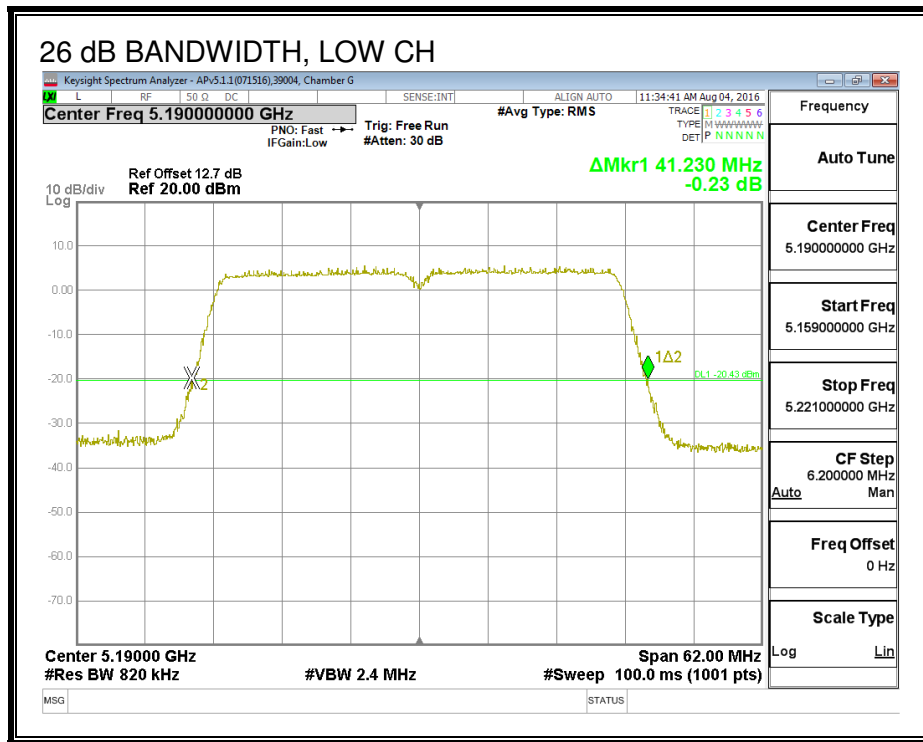

8.8.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.366	36.271
High	5230	36.325	36.364

99% BANDWIDTH, CHAIN 0

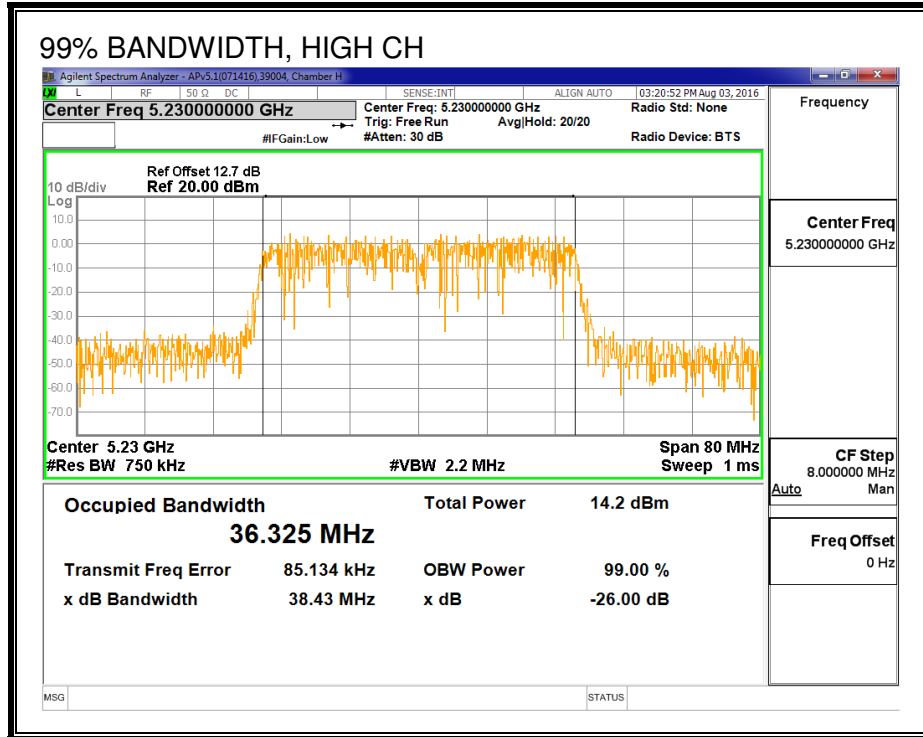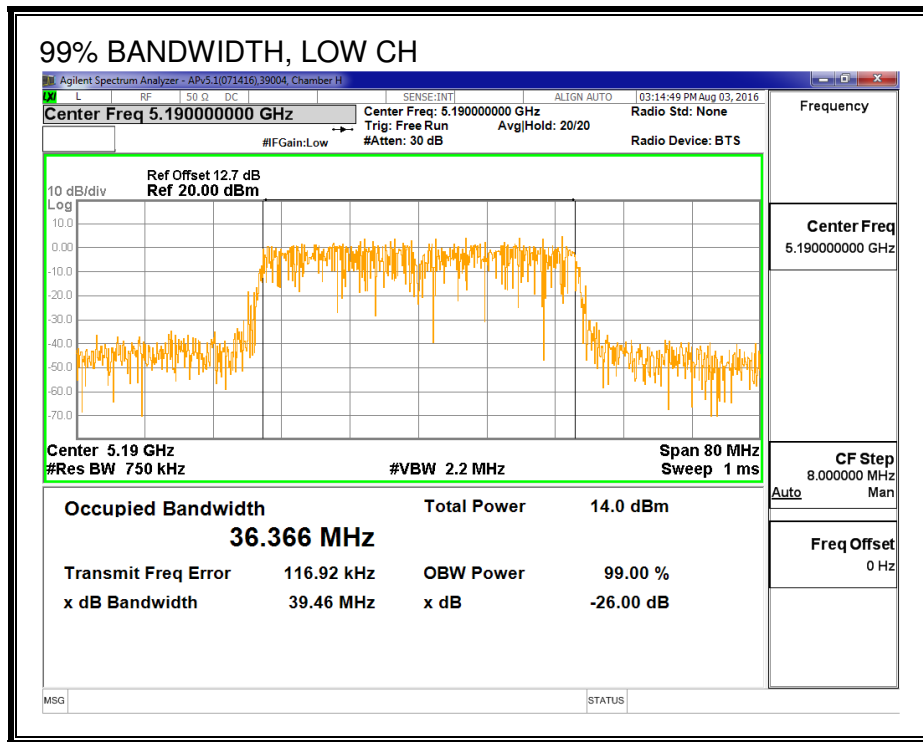

99% BANDWIDTH, CHAIN 1

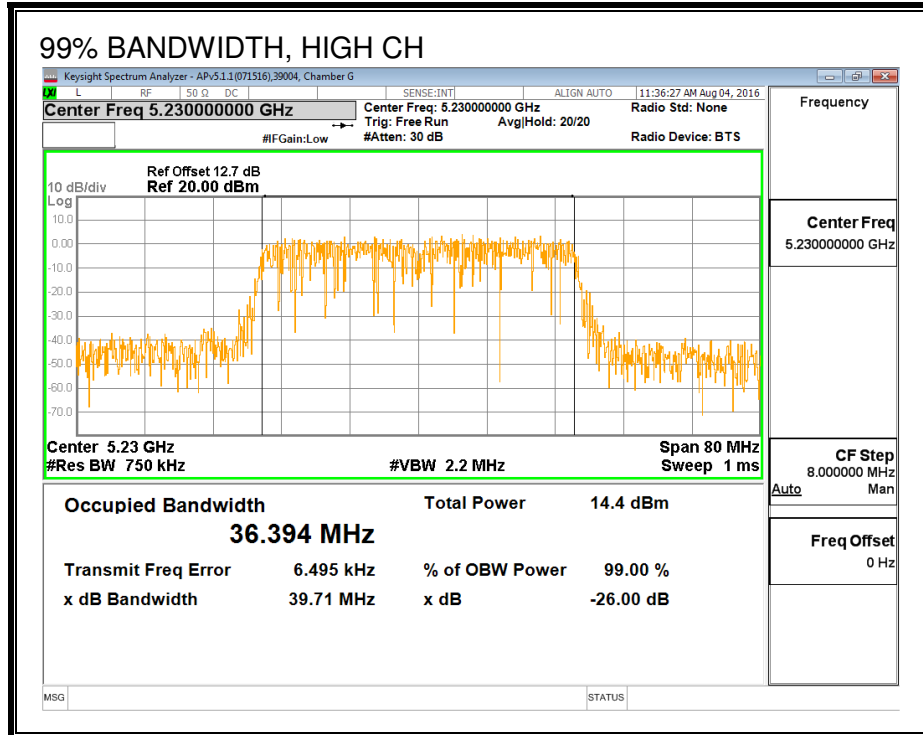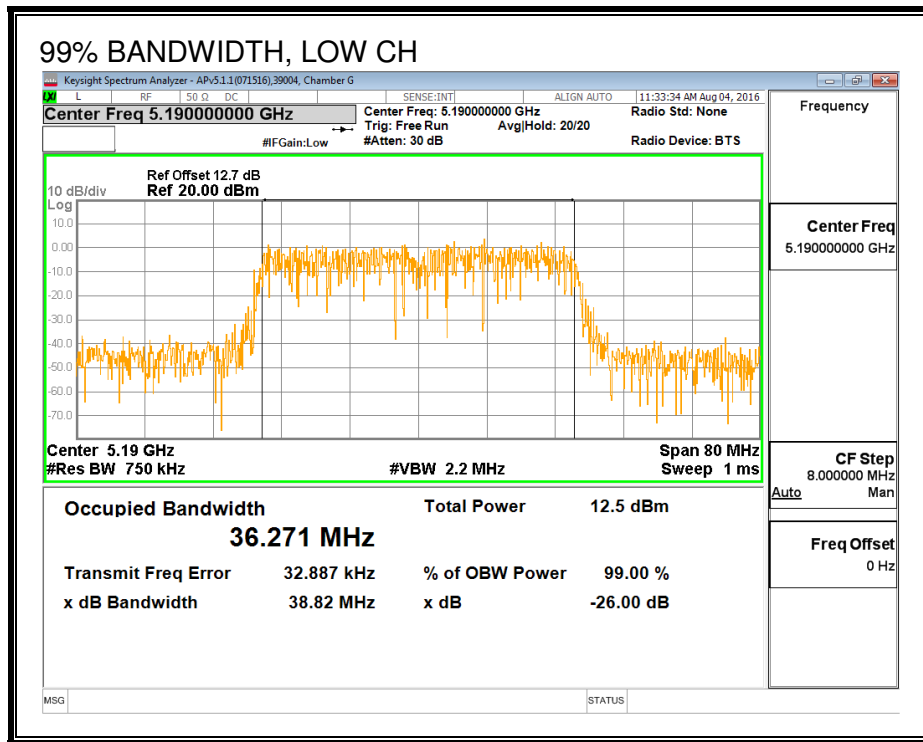

8.8.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	11.97	11.79	14.89
High	5230	13.69	13.60	16.66

8.8.4. OUTPUT POWER AND PSD (FCC)

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.60	7.00	6.80

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.60	7.00	9.81

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	6.80	9.81	23.20	7.19
High	5230	6.80	9.81	23.20	7.19

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.97	11.79	14.89	23.20	-8.31
High	5230	13.69	13.60	16.66	23.20	-6.54



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-2.84	-3.01	0.09	7.19	-7.10
High	5230	-0.43	-0.60	2.50	7.19	-4.69

PSD, CHAIN 0

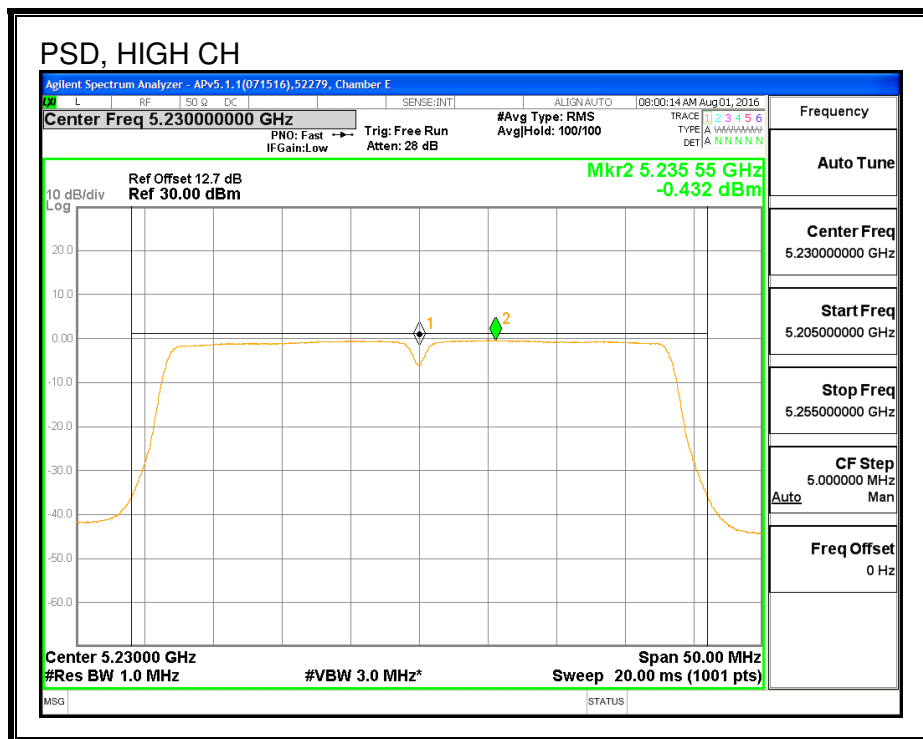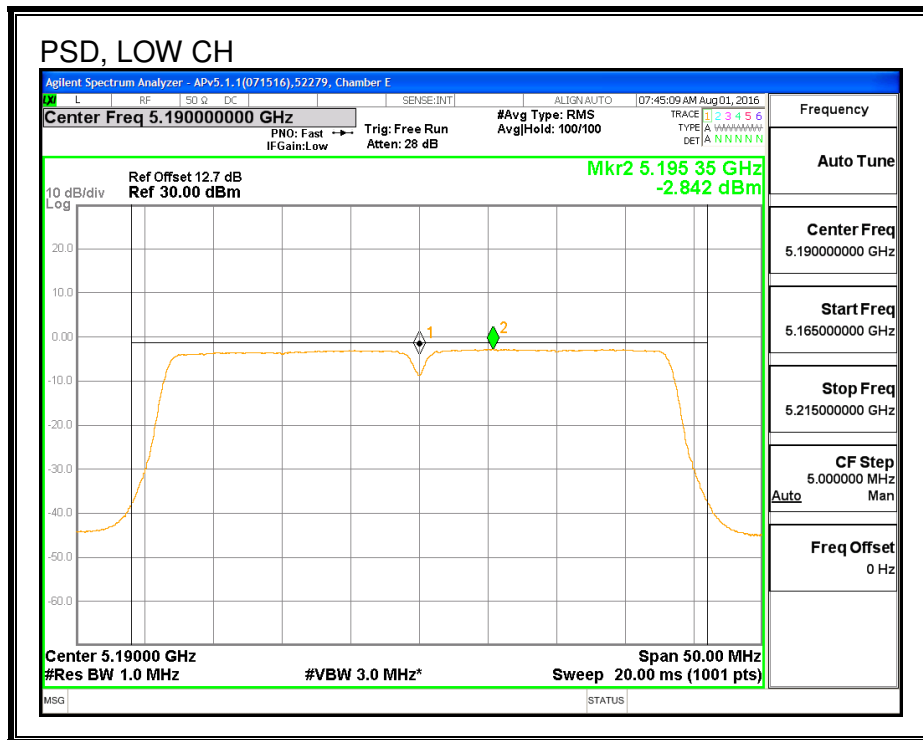

PSD, CHAIN 1

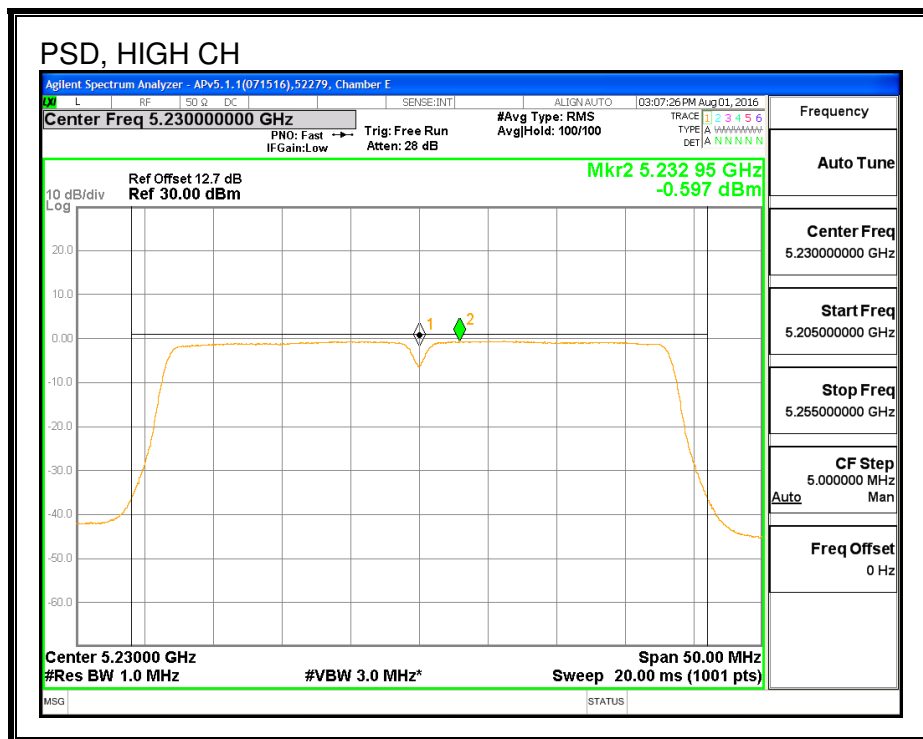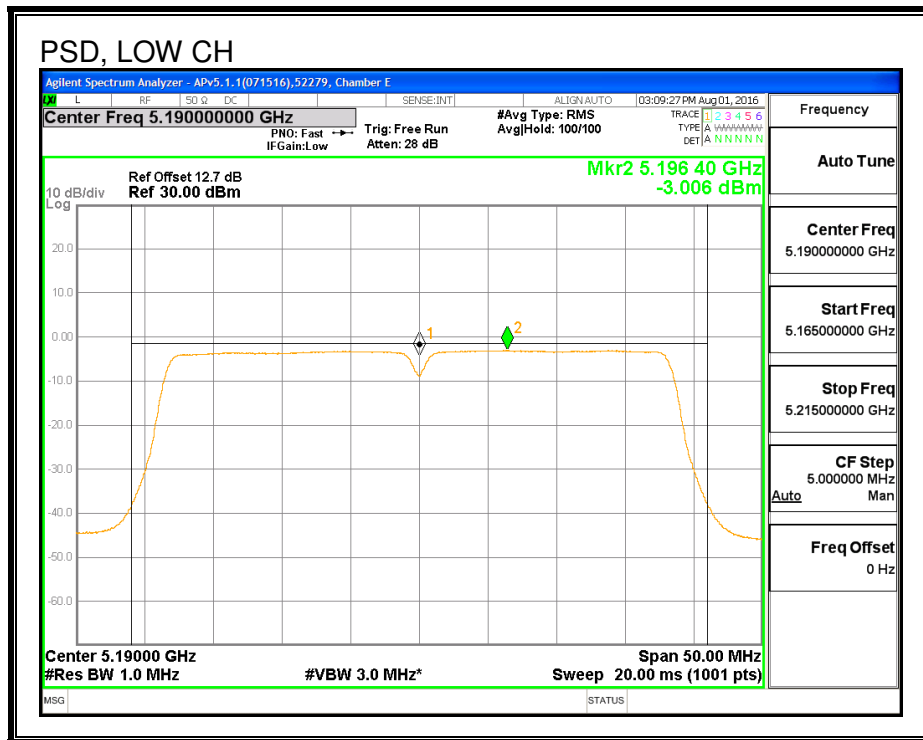

8.8.5. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	7.29	7.33	10.32
High	5230	7.37	7.36	10.37

8.8.6. OUTPUT POWER AND PSD (IC)

LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.60	7.00	6.80

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.60	7.00	9.81

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5190	36.37	6.80	9.81
High	5230	36.36	6.80	9.81

Limits

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
Low	5190	23.00	16.20	10.00	0.19
High	5230	23.00	16.20	10.00	0.19

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PPSD
---------------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	7.29	7.33	10.32	16.20	-5.88
High	5230	7.37	7.36	10.37	16.20	-5.83



PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-7.74	-7.85	-4.78	0.19	-4.97
High	5230	-7.37	-7.64	-4.49	0.19	-4.68

PSD, CHAIN 0

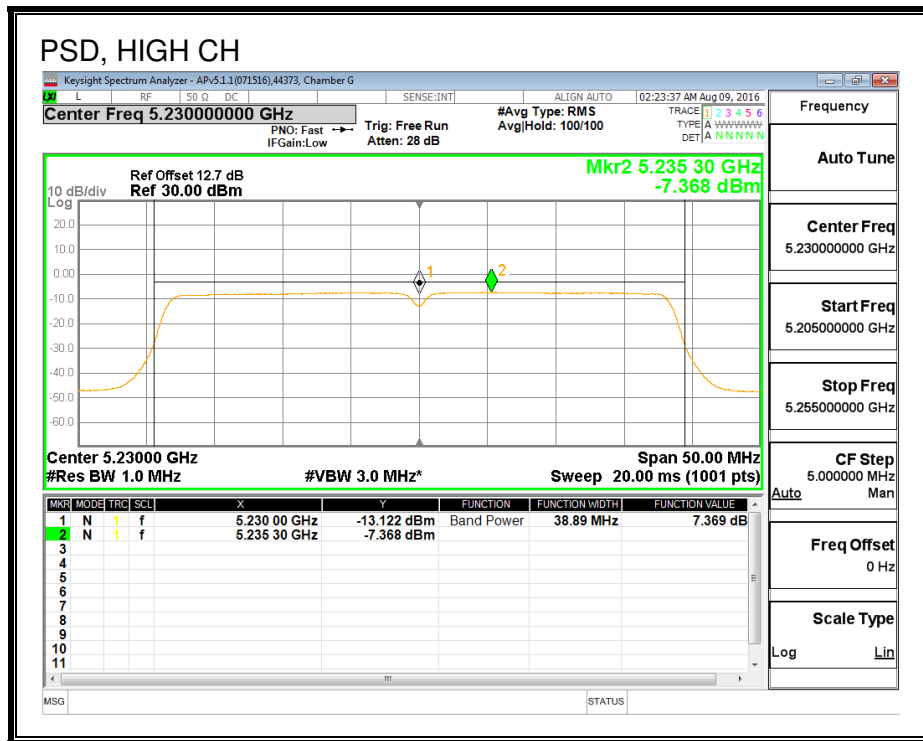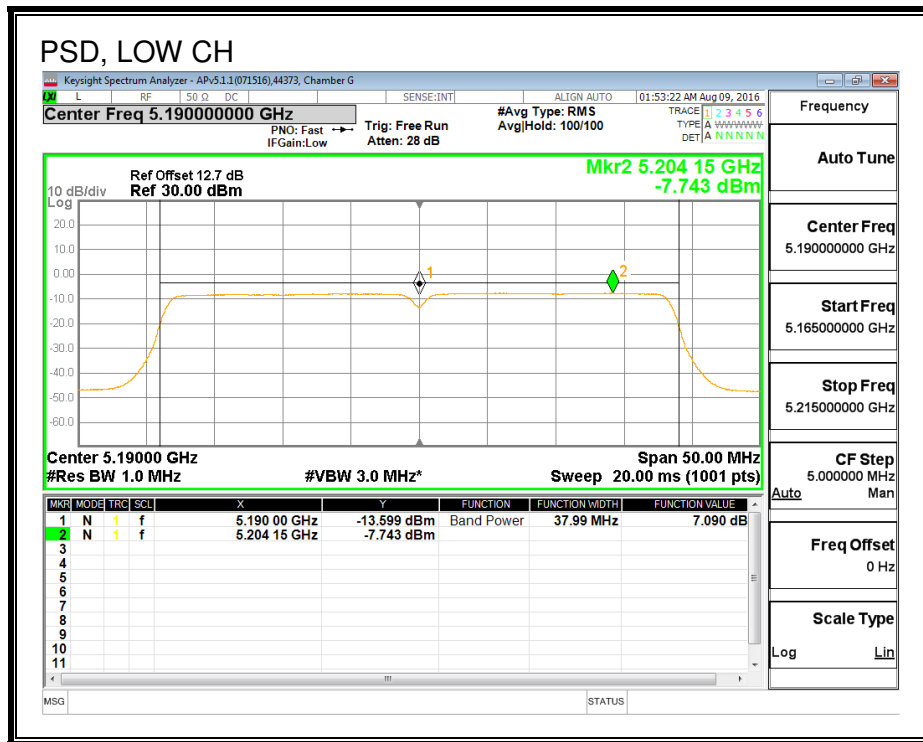

PSD, CHAIN 1

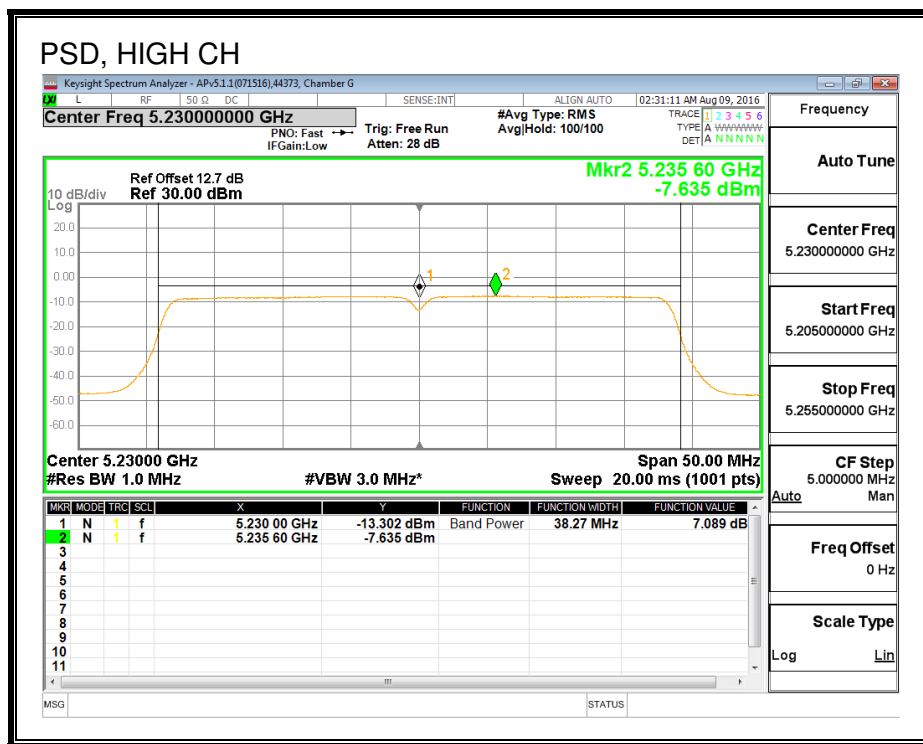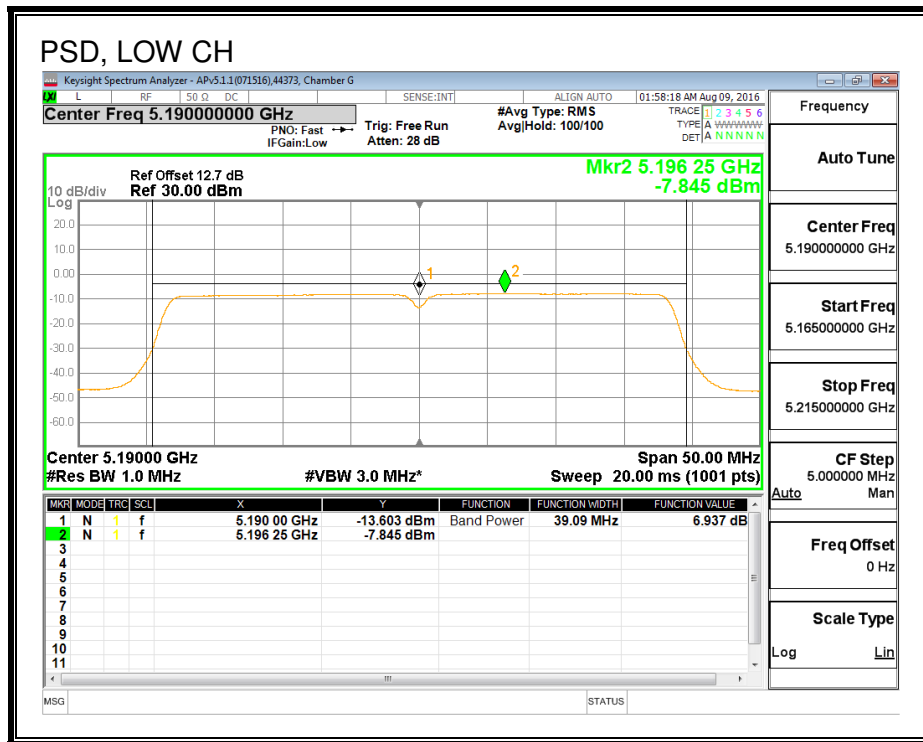

8.9. 802.11n HT40 2Tx STBC MODE IN THE 5.2 GHz BAND

8.9.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.982	40.796
High	5230	40.870	40.626

26 DB BANDWIDTH, CHAIN 0

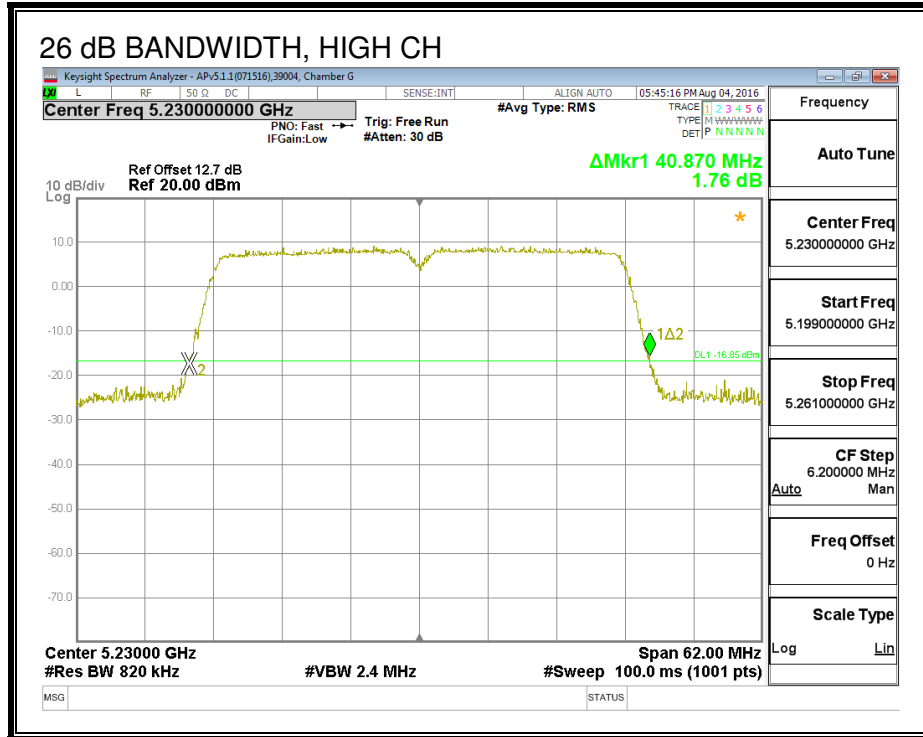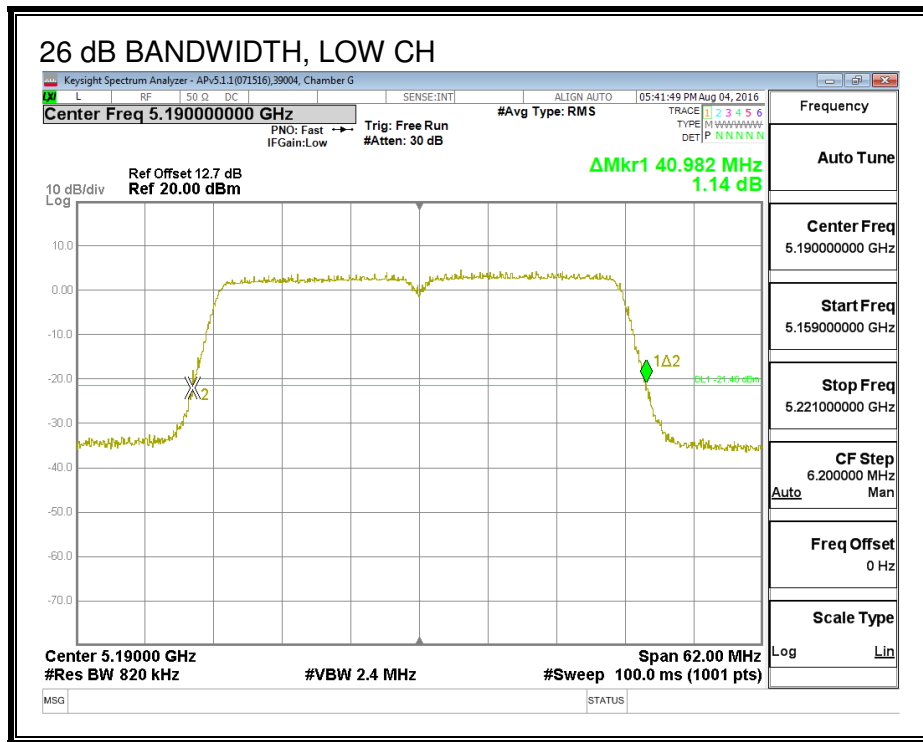

26 DB BANDWIDTH, CHAIN 1

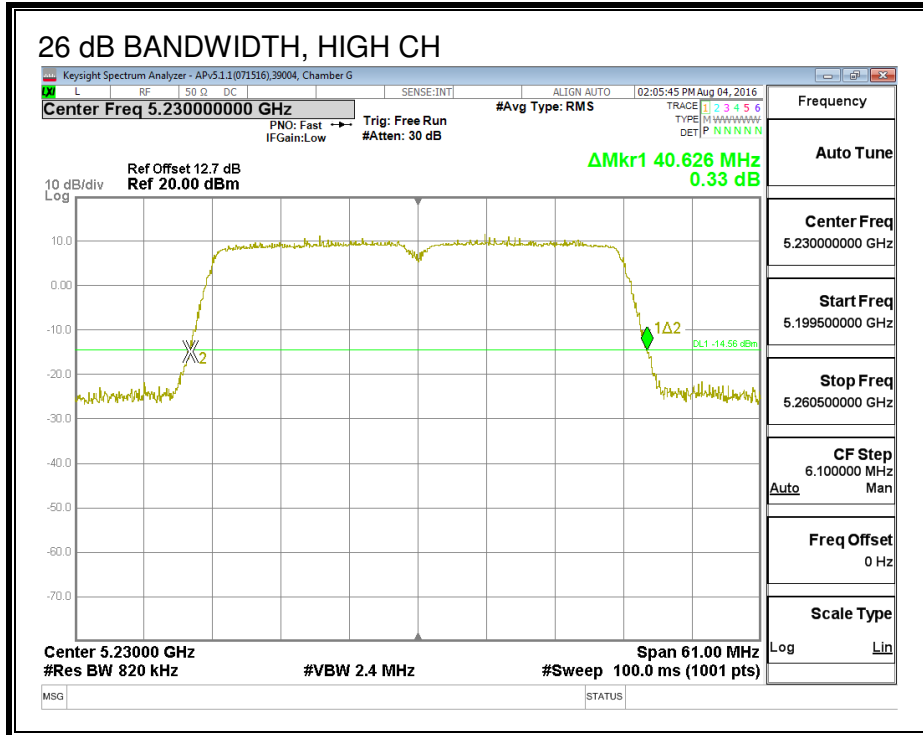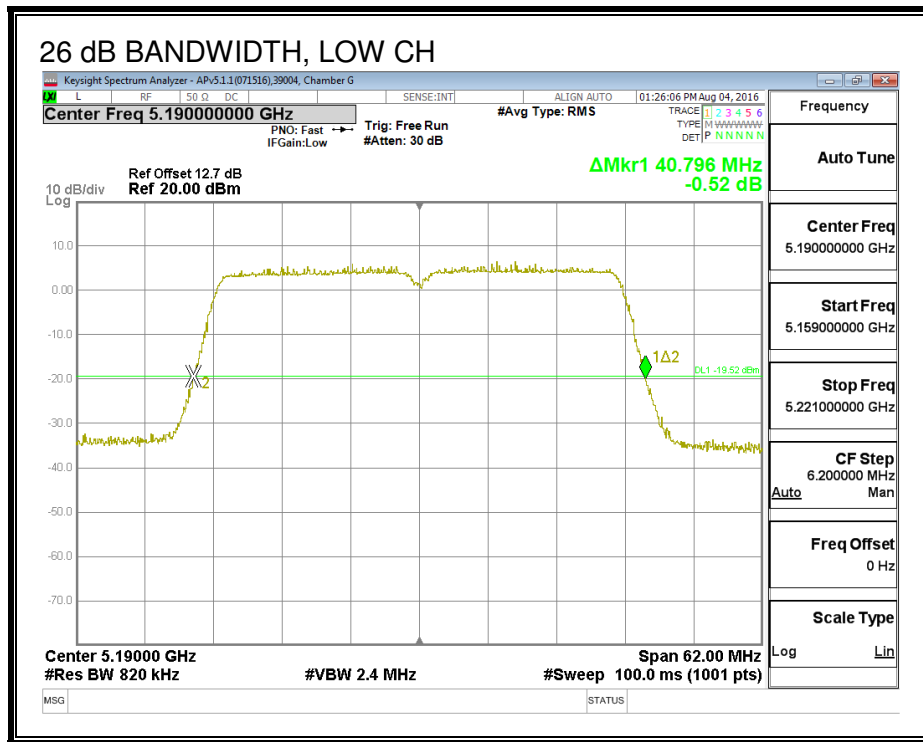

8.9.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.333	36.439
High	5230	36.351	36.434

99% BANDWIDTH, CHAIN 0

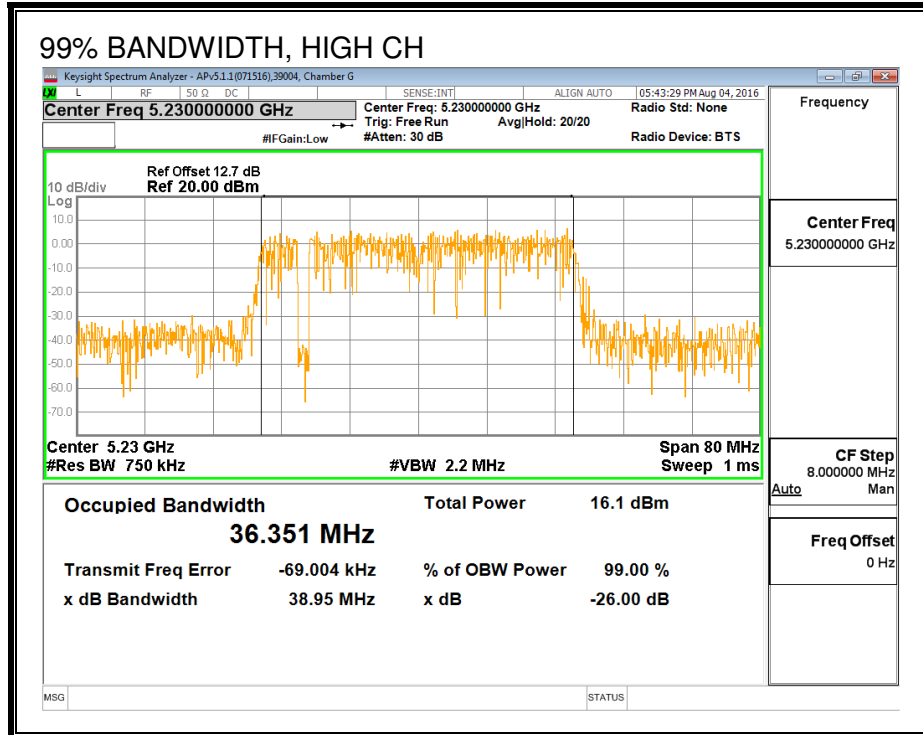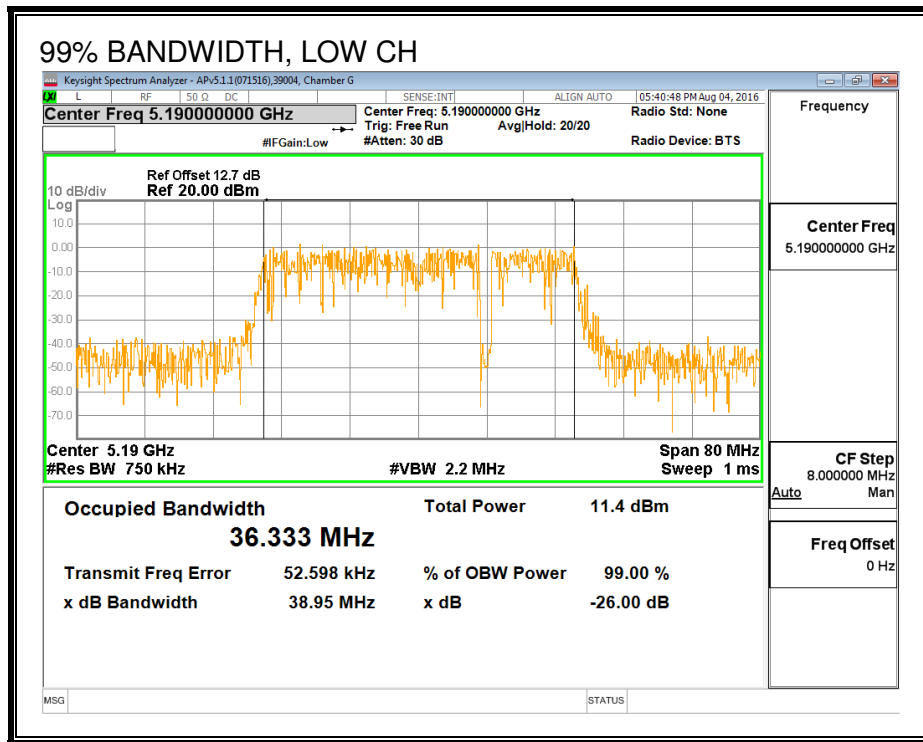

99% BANDWIDTH, CHAIN 1

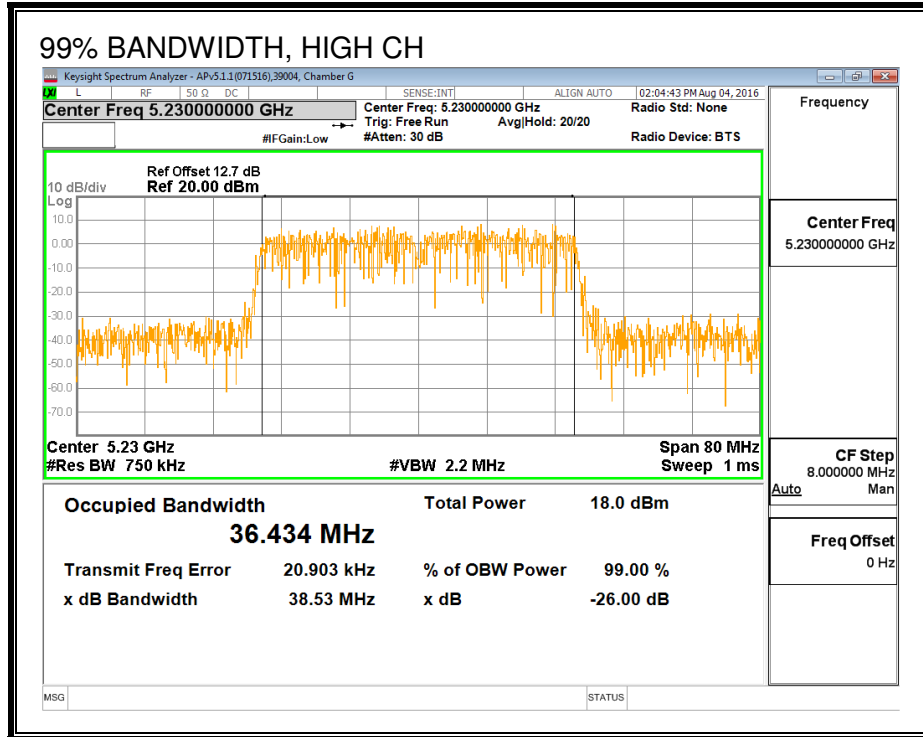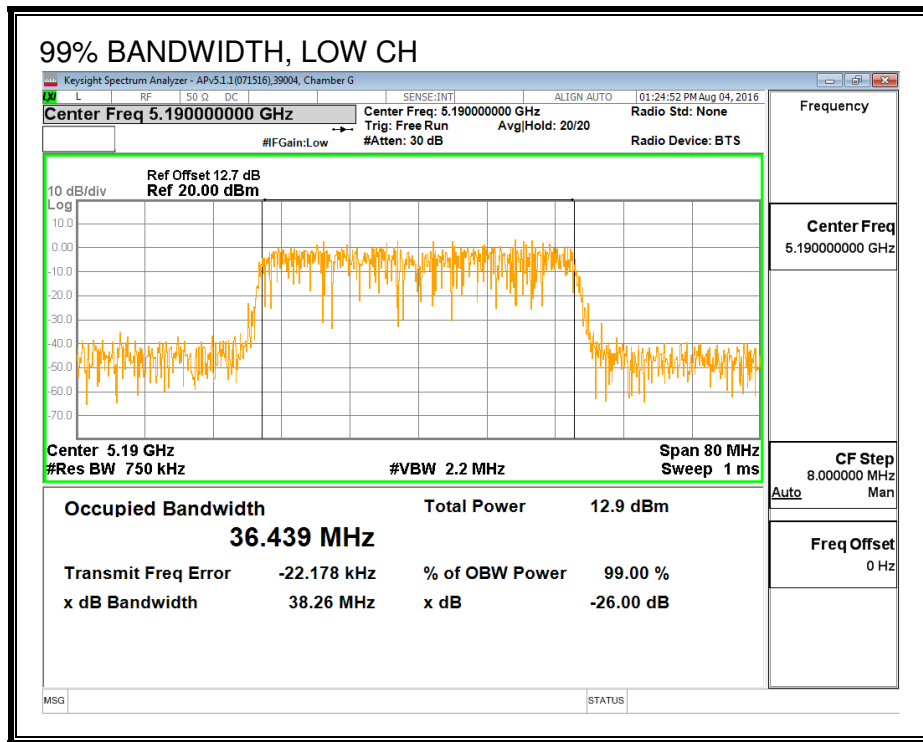

8.9.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	11.89	11.84	14.88
High	5230	13.67	13.63	16.66

8.9.4. OUTPUT POWER AND PSD (FCC)

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.60	7.00	6.80

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	6.80	6.80	23.20	10.20
High	5230	6.80	6.80	23.20	10.20

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.89	11.84	14.88	23.20	-8.32
High	5230	13.67	13.63	16.66	23.20	-6.54



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-2.80	-2.93	0.15	10.20	-10.05
High	5230	2.76	2.86	5.82	10.20	-4.38

PSD, CHAIN 0

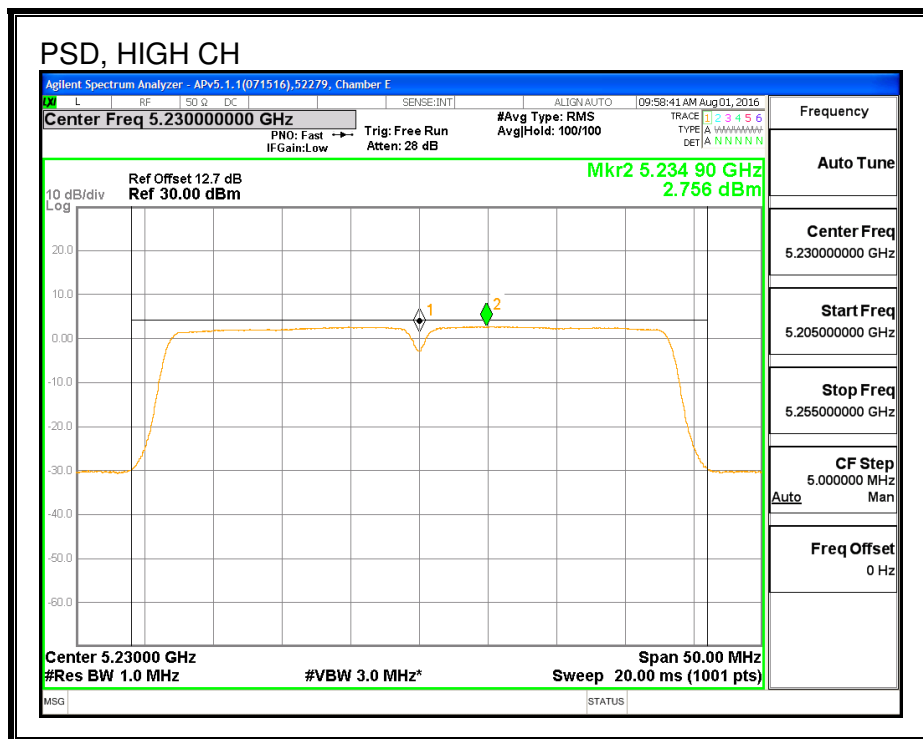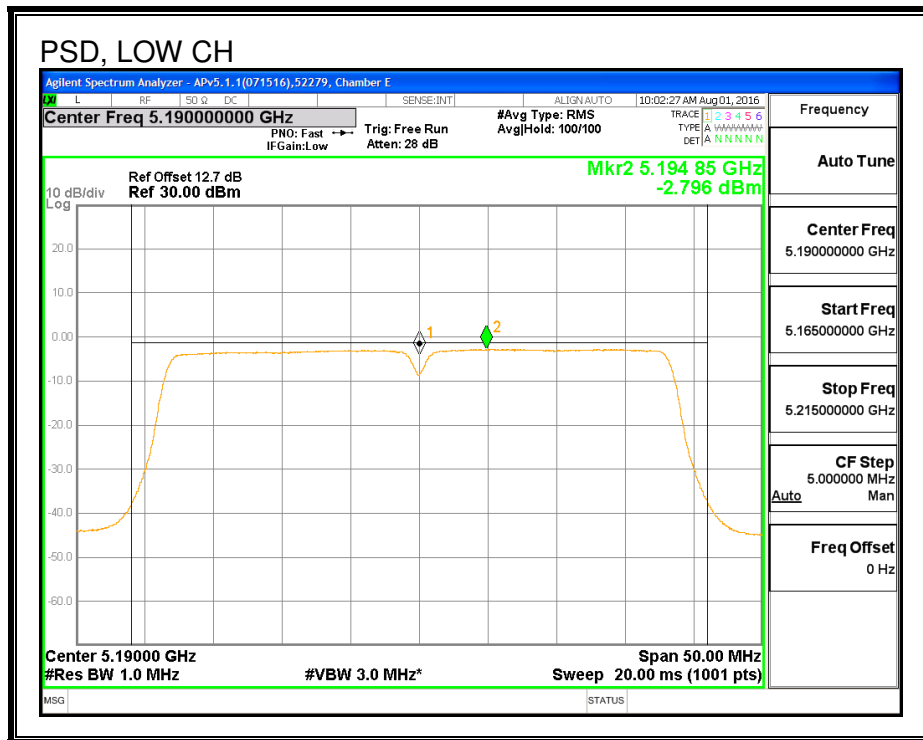

PSD, CHAIN 1

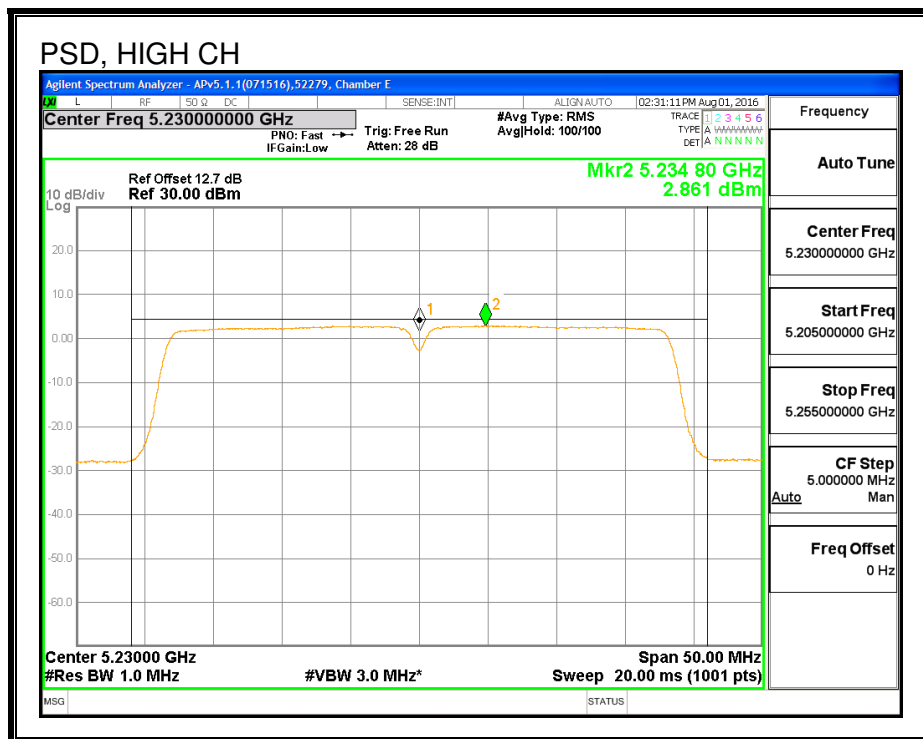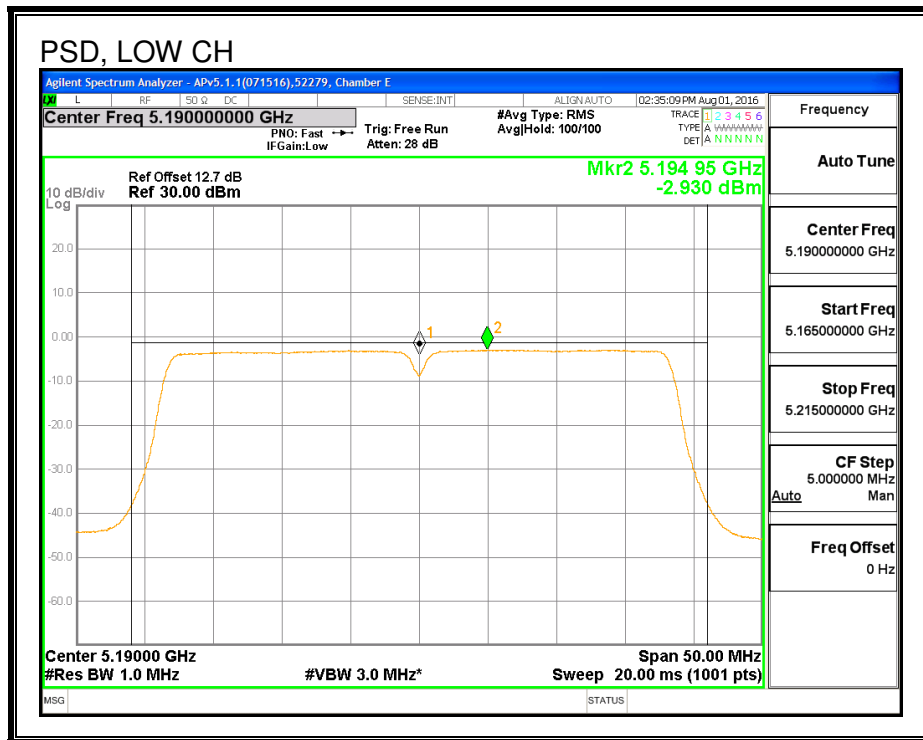

8.9.5. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	10.32	10.29	13.32
High	5230	10.37	10.33	13.36

8.9.6. OUTPUT POWER AND PSD (IC)

LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.60	7.00	6.80

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5190	36.44	6.80	6.80
High	5230	36.43	6.80	6.80

Limits

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
Low	5190	23.00	16.20	10.00	3.20
High	5230	23.00	16.20	10.00	3.20

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PPSD
---------------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.32	10.29	13.32	16.20	-2.88
High	5230	10.37	10.33	13.36	16.20	-2.84



PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-4.97	-4.91	-1.93	3.20	-5.13
High	5230	-4.71	-4.85	-1.77	3.20	-4.97

PSD, CHAIN 0

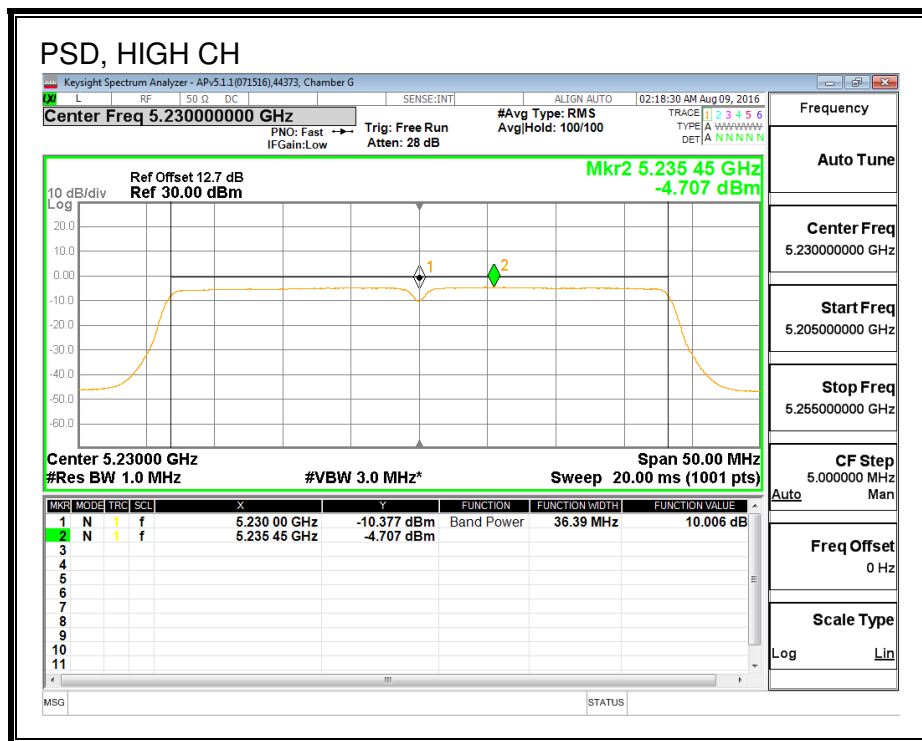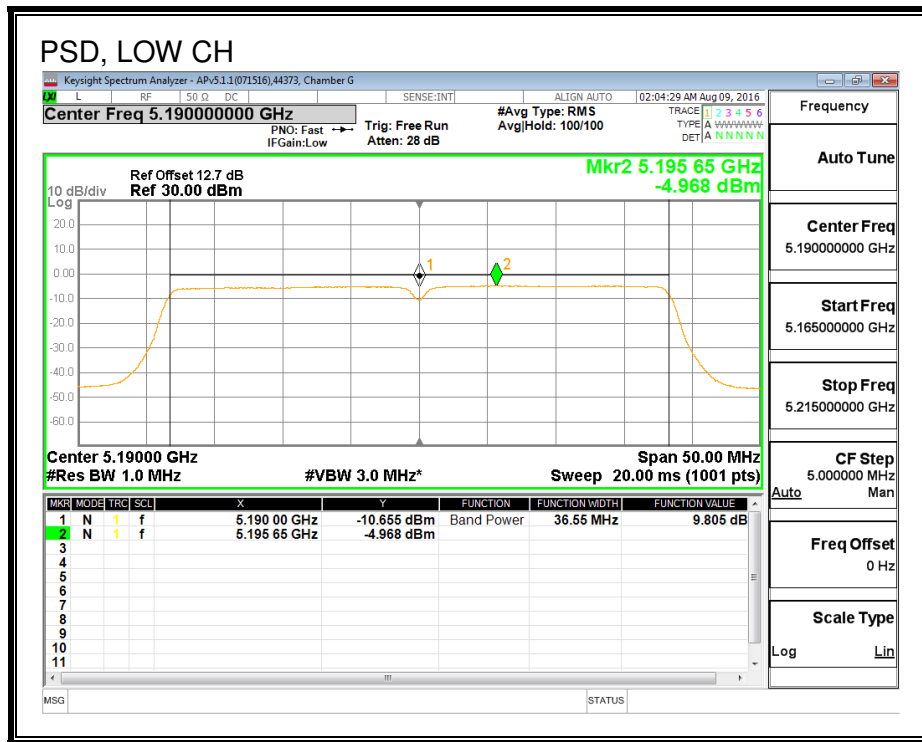

PSD, CHAIN 1

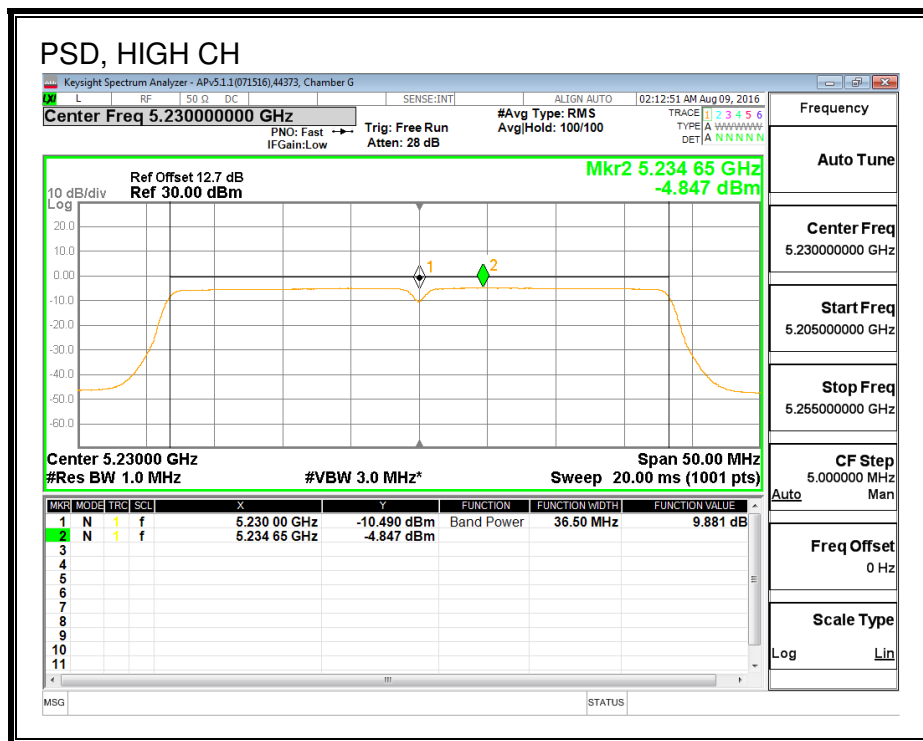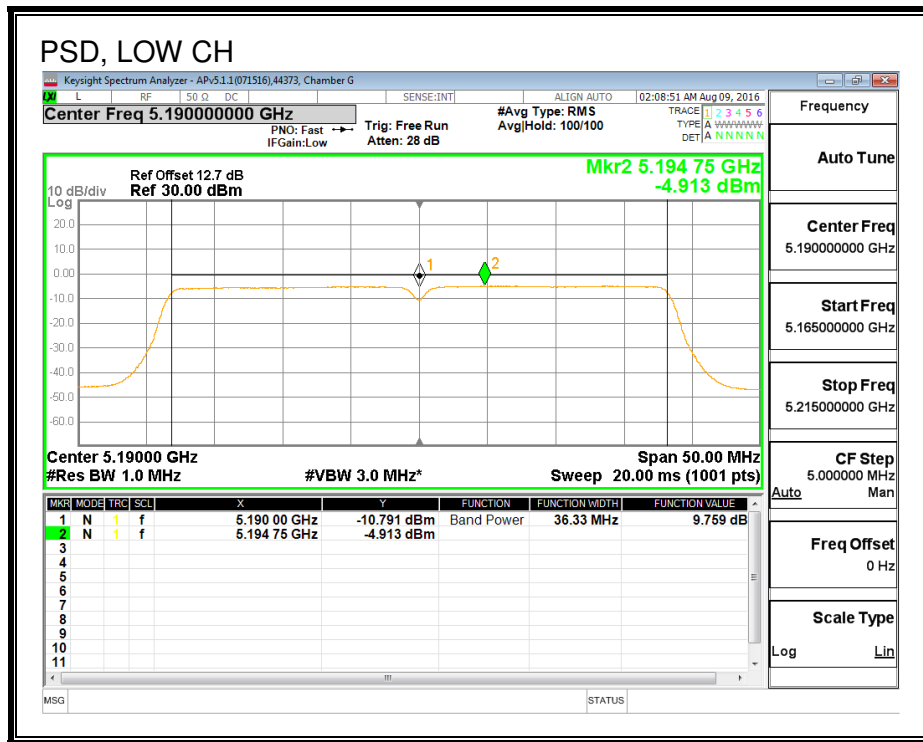

8.10. 802.11ac VHT40 2Tx BEAM FORMING MODE IN THE 5.2 GHz BAND

8.10.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.443	40.321
High	5230	40.382	40.382

26 DB BANDWIDTH, CHAIN 0

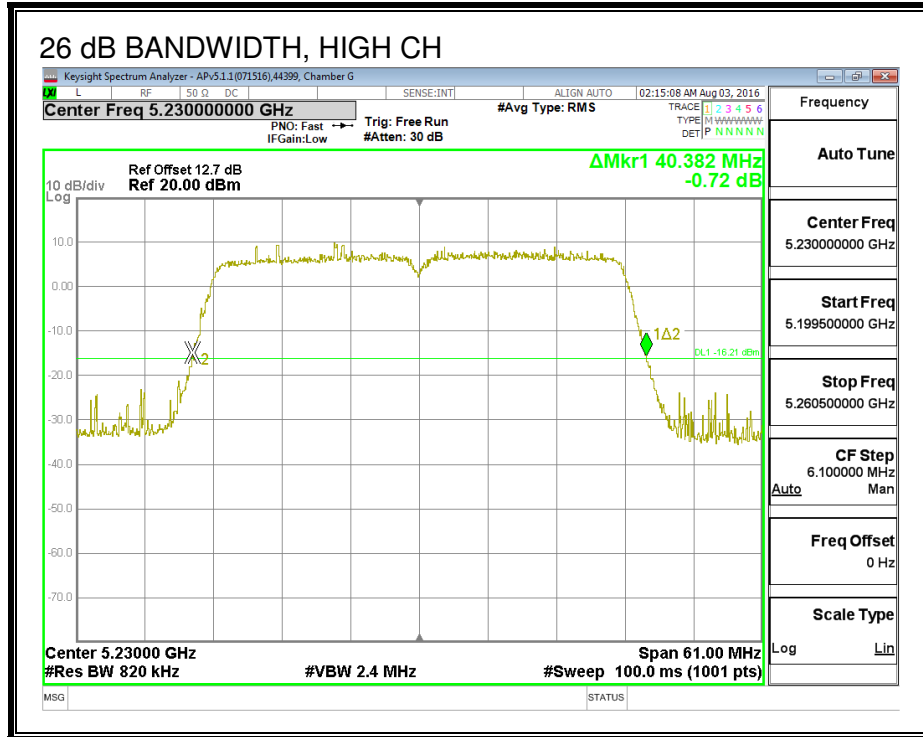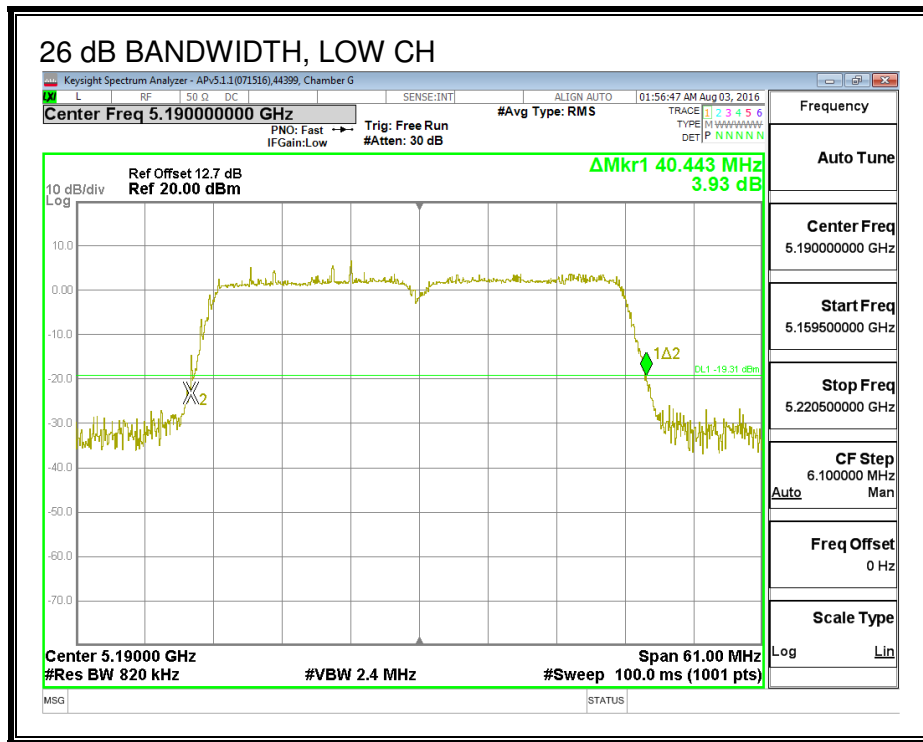

26 DB BANDWIDTH, CHAIN 1

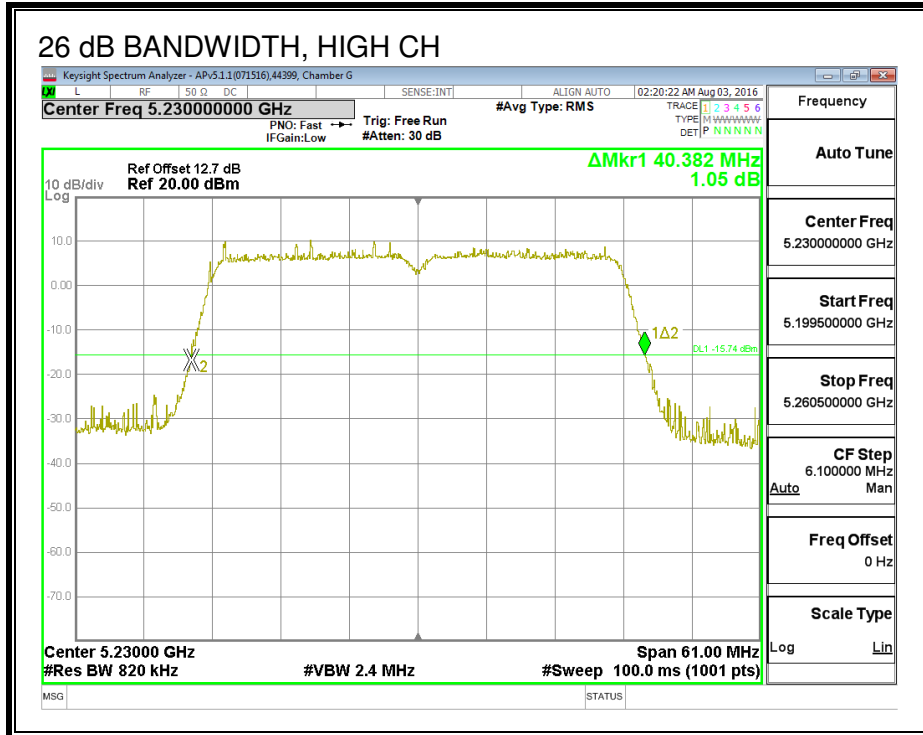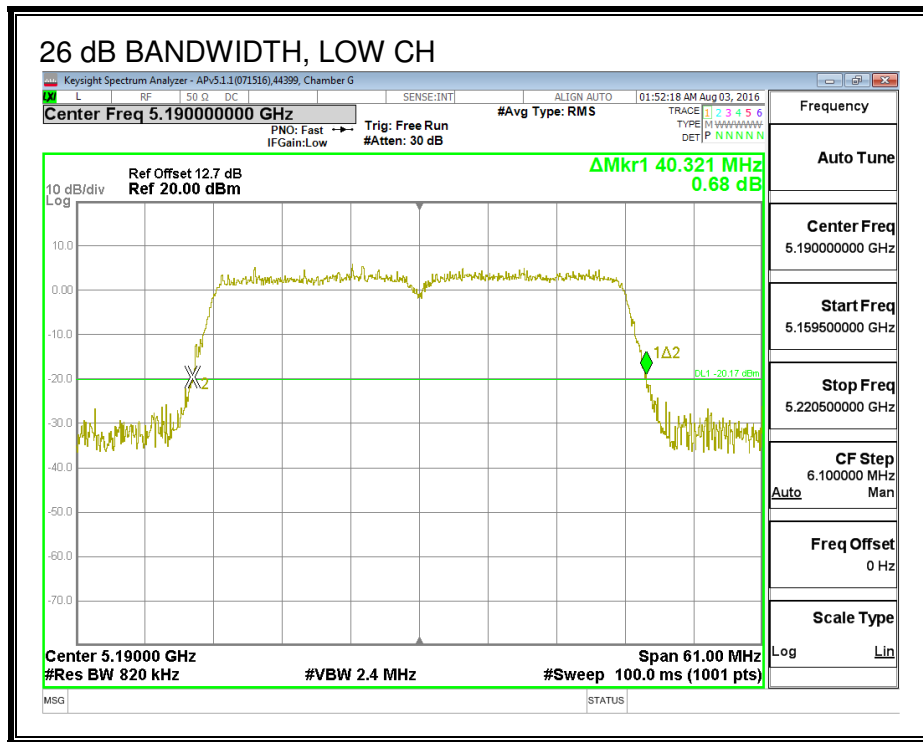

8.10.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.477	36.298
High	5230	36.303	36.332

99% BANDWIDTH, CHAIN 0

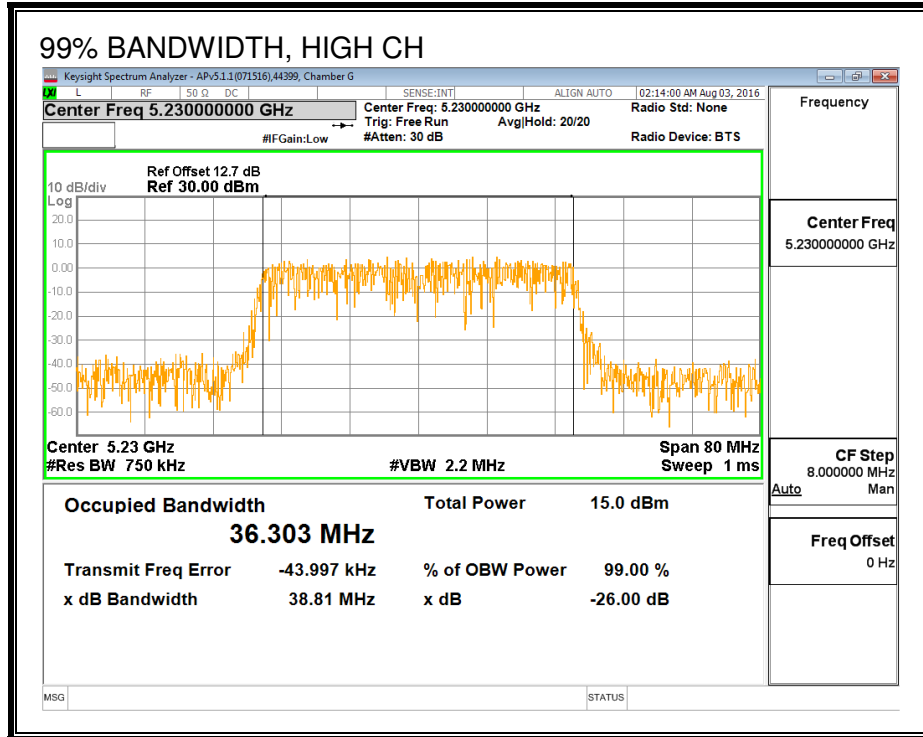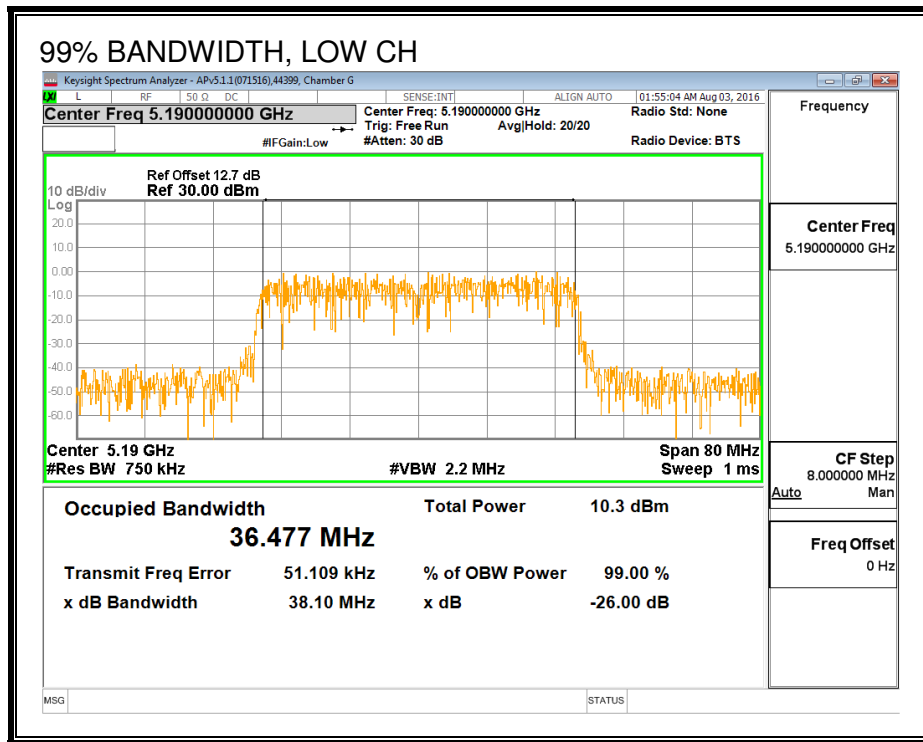

99% BANDWIDTH, CHAIN 1

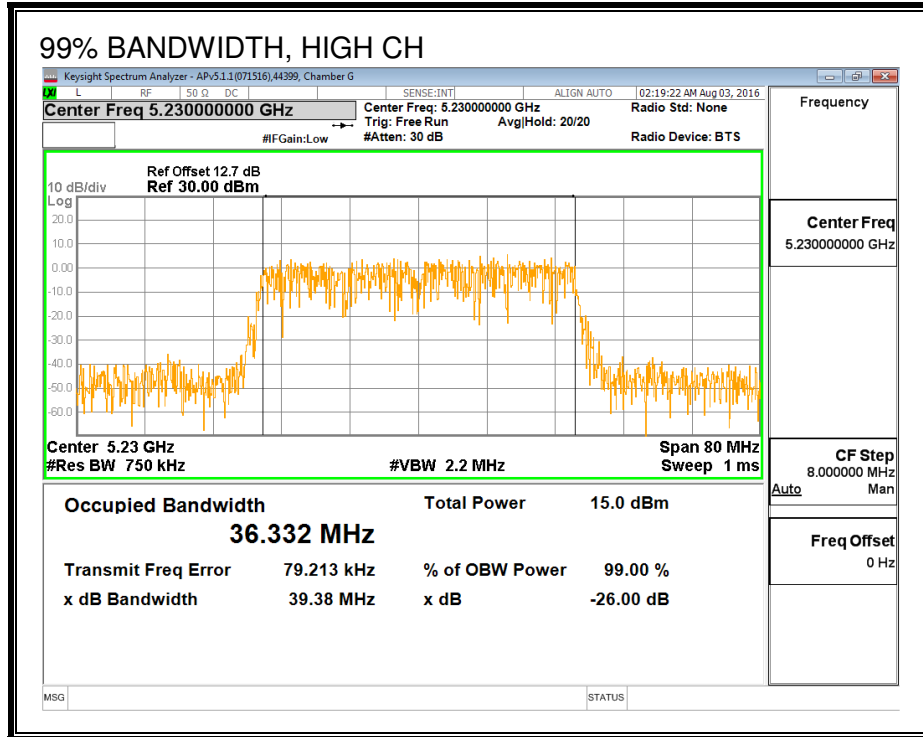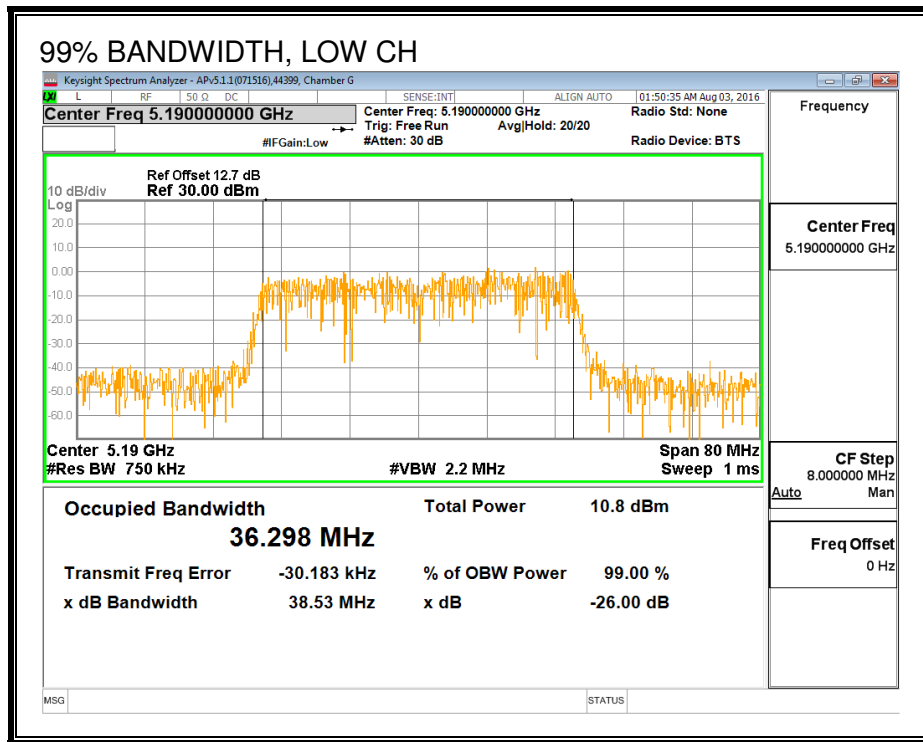

8.10.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	7.91	7.97	10.95
High	5230	13.66	13.71	16.70