

## 8.10.4. OUTPUT POWER AND PSD (FCC)

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
6.60	7.00	9.81

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	9.81	9.81	20.19	7.19
High	5230	9.81	9.81	20.19	7.19

<b>Duty Cycle CF (dB)</b>	0.12	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	7.91	7.97	10.95	20.19	-9.24
High	5230	13.66	13.71	16.70	20.19	-3.49



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-7.28	-7.17	-4.09	7.19	-11.28
High	5230	-0.69	-0.79	2.39	7.19	-4.80

**PSD, CHAIN 0**

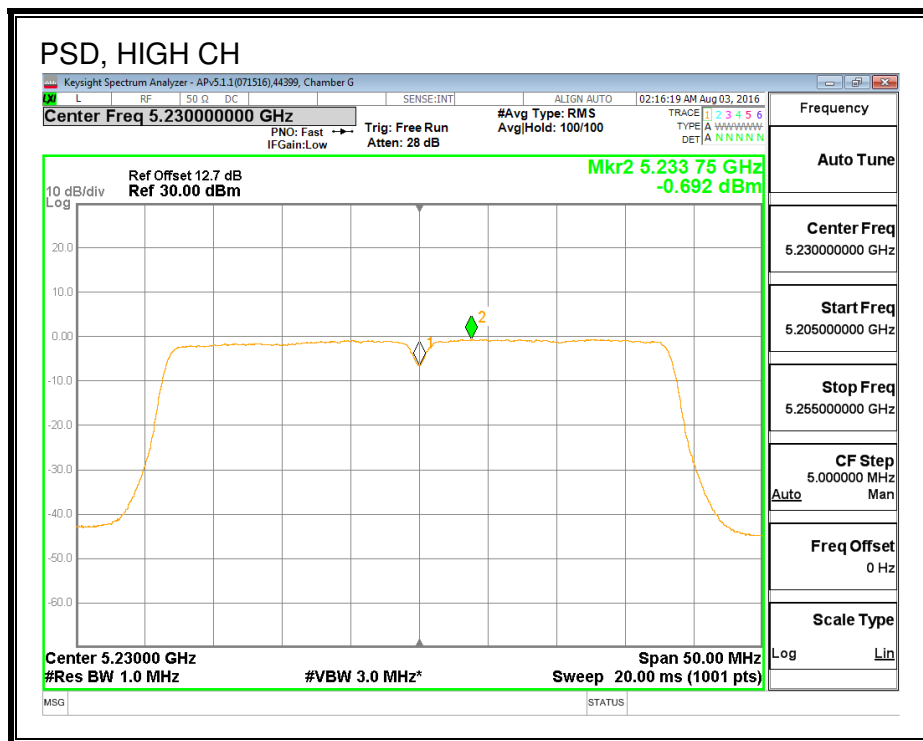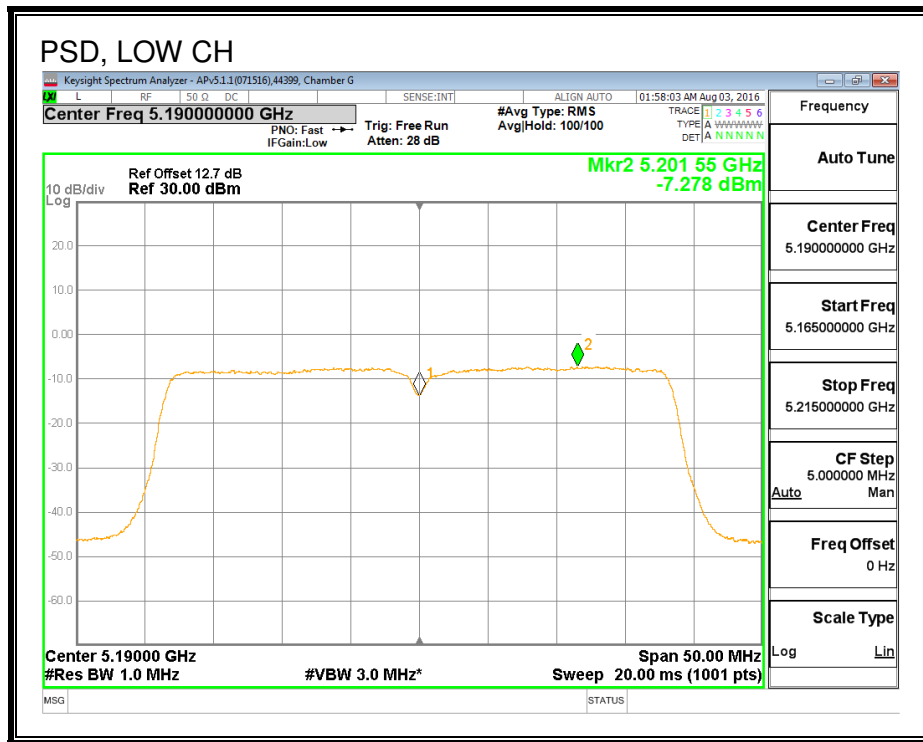

**PSD, CHAIN 1**

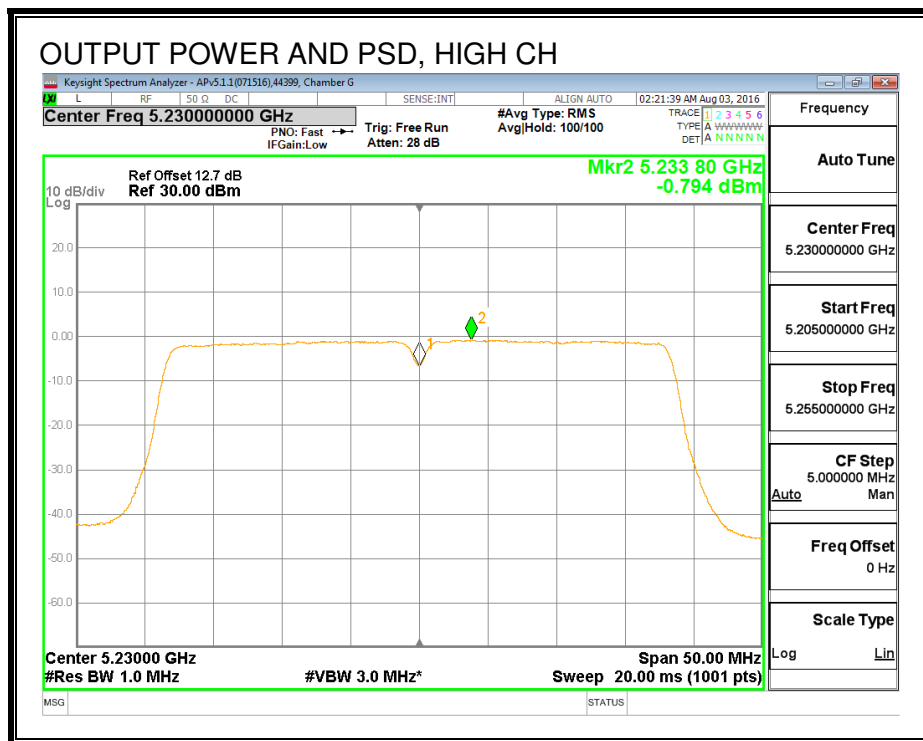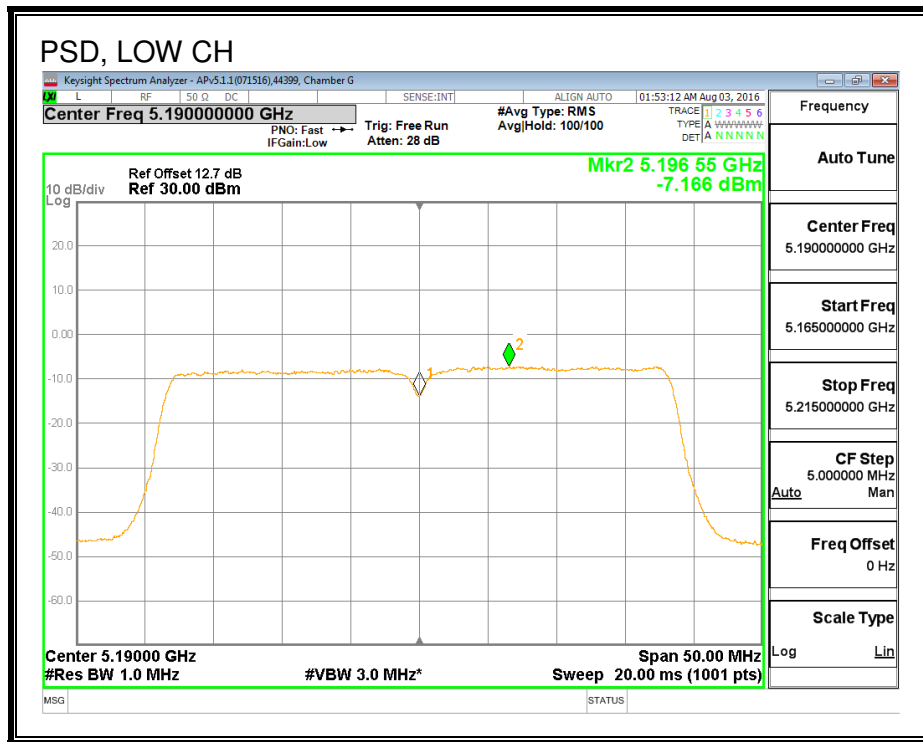

### 8.10.5. AVERAGE POWER (IC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	44399	<b>Date:</b>	8/3/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	7.48	7.44	10.47
High	5230	7.43	7.45	10.45

### 8.10.6. OUTPUT POWER AND PSD (IC)

#### LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

#### TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
6.60	7.00	9.81

**RESULTS**

<b>ID:</b>	44399	<b>Date:</b>	8/3/16
------------	-------	--------------	--------

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5190	36.30	9.81	9.81
High	5230	36.30	9.81	9.81

**Limits**

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
Low	5190	23.00	13.19	10.00	0.19
High	5230	23.00	13.19	10.00	0.19

<b>Duty Cycle CF (dB)</b>	0.12	<b>Included in Calculations of Corr'd PPSD</b>
---------------------------	------	--

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	7.48	7.44	10.47	13.19	-2.72
High	5230	7.43	7.45	10.45	13.19	-2.74

**PPSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-7.18	-7.23	-4.07	0.19	-4.26
High	5230	-7.42	-7.45	-4.30	0.19	-4.49



**PSD, CHAIN 0**

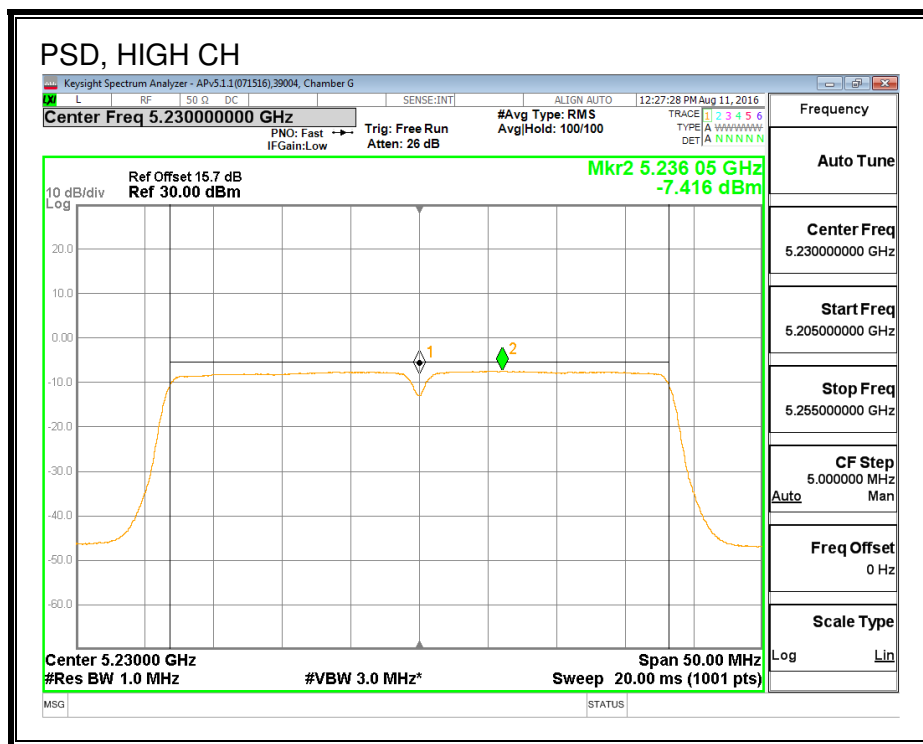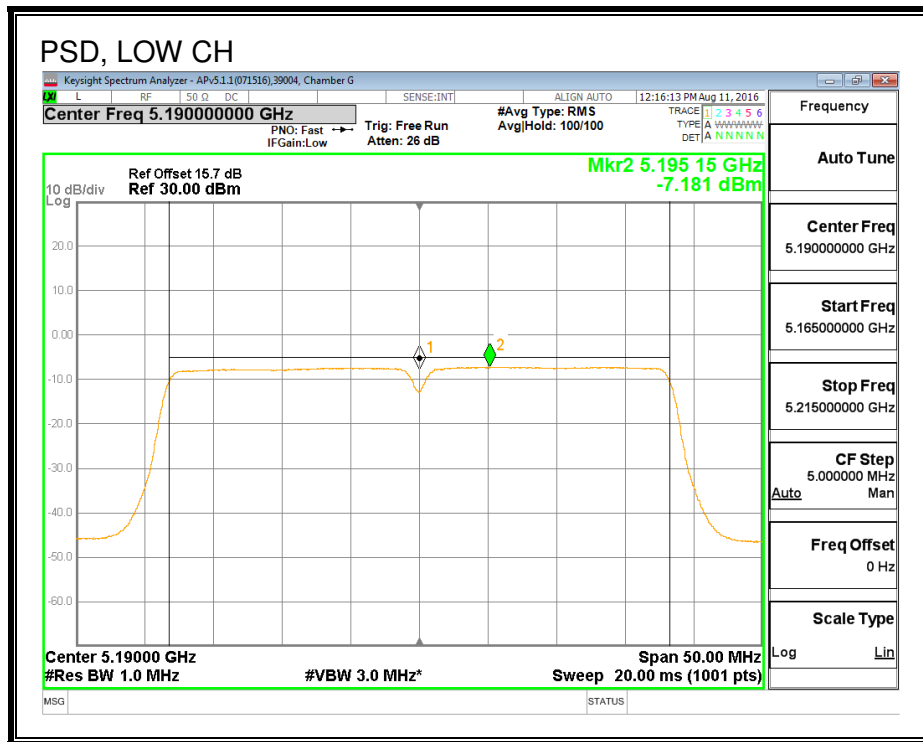

**PSD, CHAIN 1**

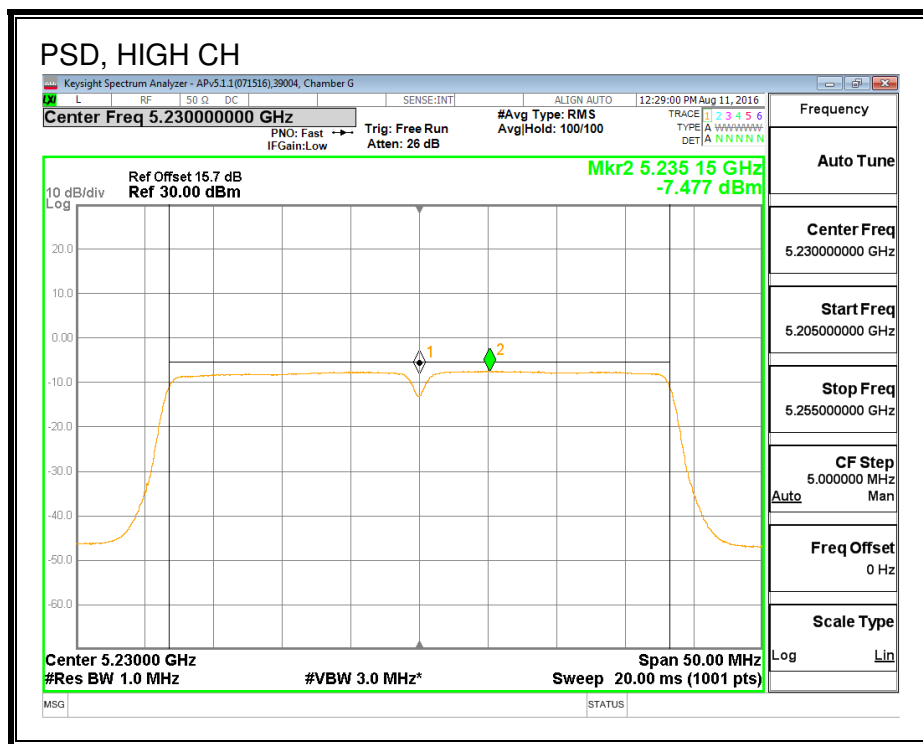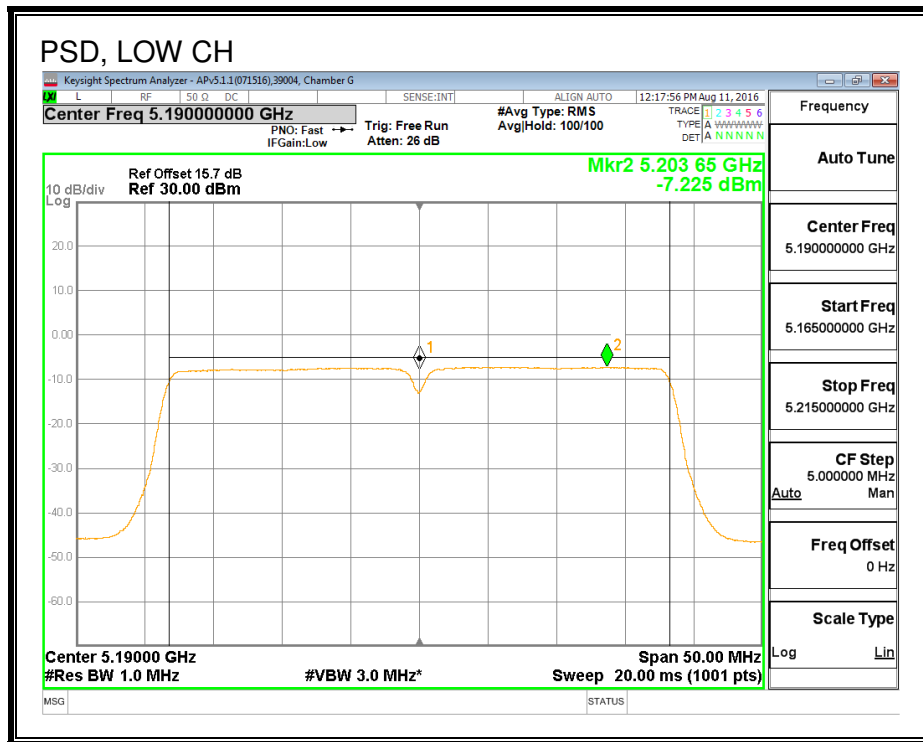

## 8.11. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.2 GHz BAND

### 8.11.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	83.25

#### 26 dB BANDWIDTH

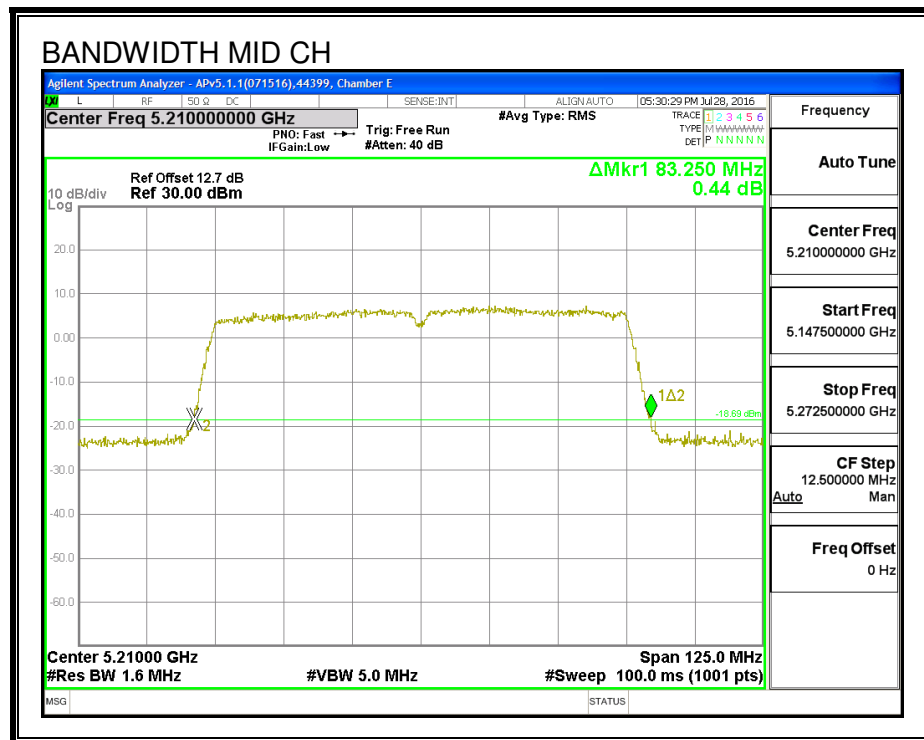

### 8.11.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.917

#### 99% BANDWIDTH

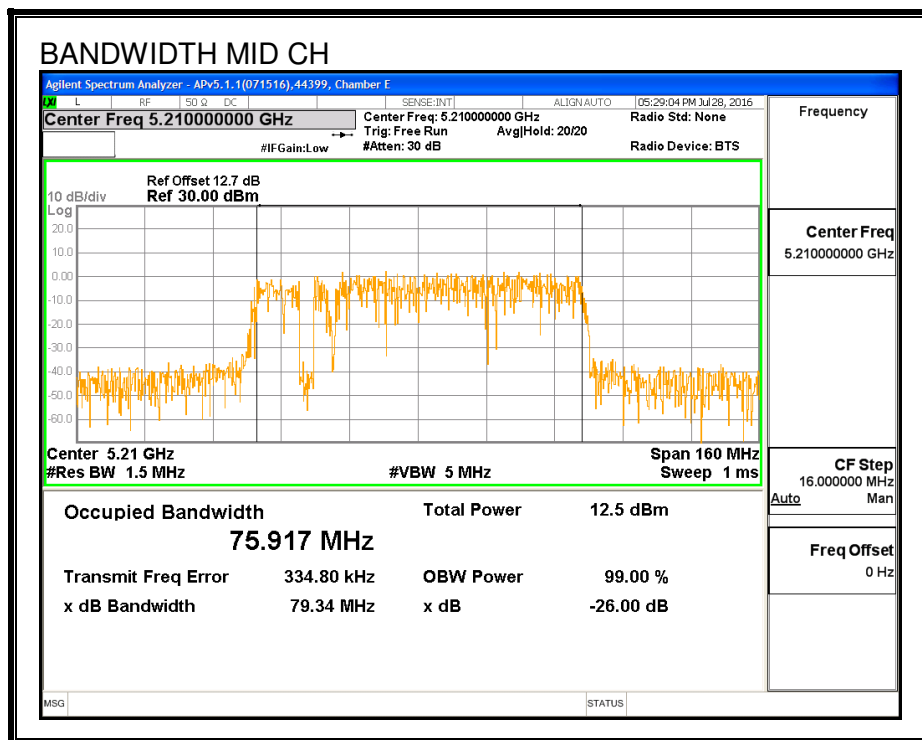

### 8.11.3. AVERAGE POWER (FCC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	12.39

#### 8.11.4. OUTPUT POWER AND PSD (FCC)

##### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	6.60	6.60	23.40	10.40

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	12.39	12.39	23.40	-11.01

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-5.106	-4.89	10.40	-15.29

**PSD**

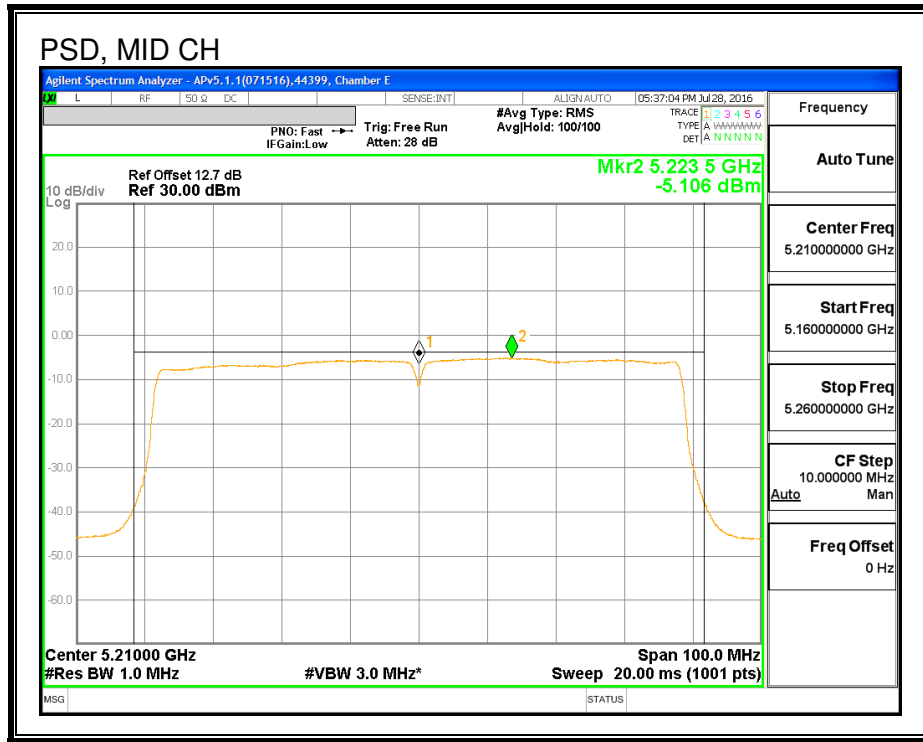



### 8.11.5. AVERAGE POWER (IC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	12.46

### **8.11.6. OUTPUT POWER AND PSD (IC)**

#### **LIMITS**

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

#### **TEST PROCEDURE**

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
42	5210	75.92	6.60

**Limits**

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
42	5210	23.00	16.40	10.00	3.40

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PPSD</b>
---------------------------	------	--


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	12.46	12.46	16.40	-3.94

**PPSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-2.49	-2.27	3.40	-5.67

**PSD**

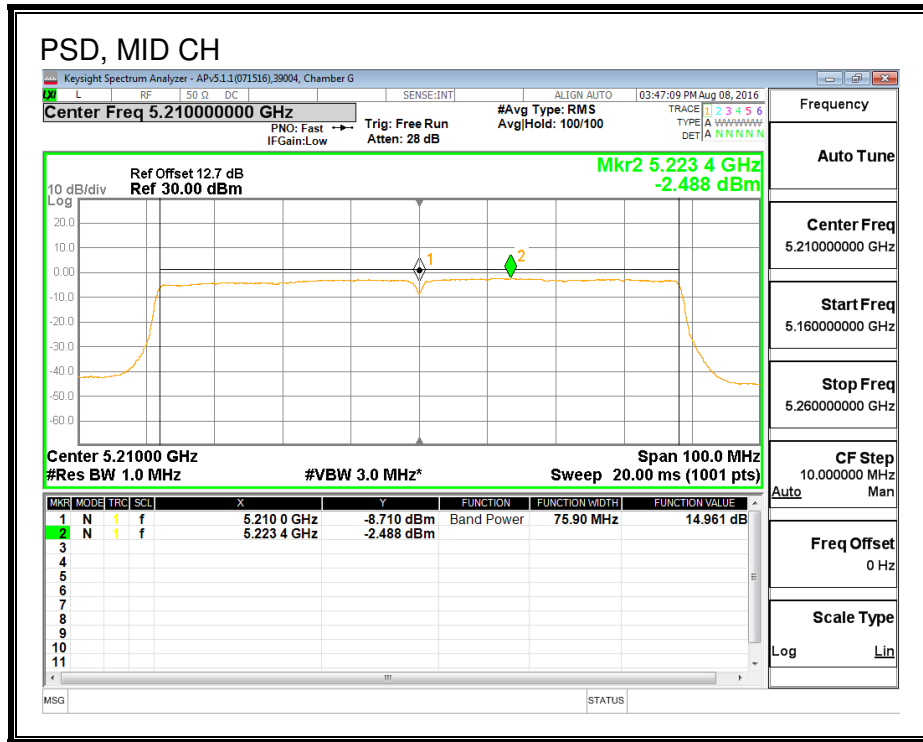

## 8.12. 802.11ac VHT80 CHAIN 1 MODE IN THE 5.2 GHz BAND

### 8.12.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	83.664

#### 26 dB BANDWIDTH

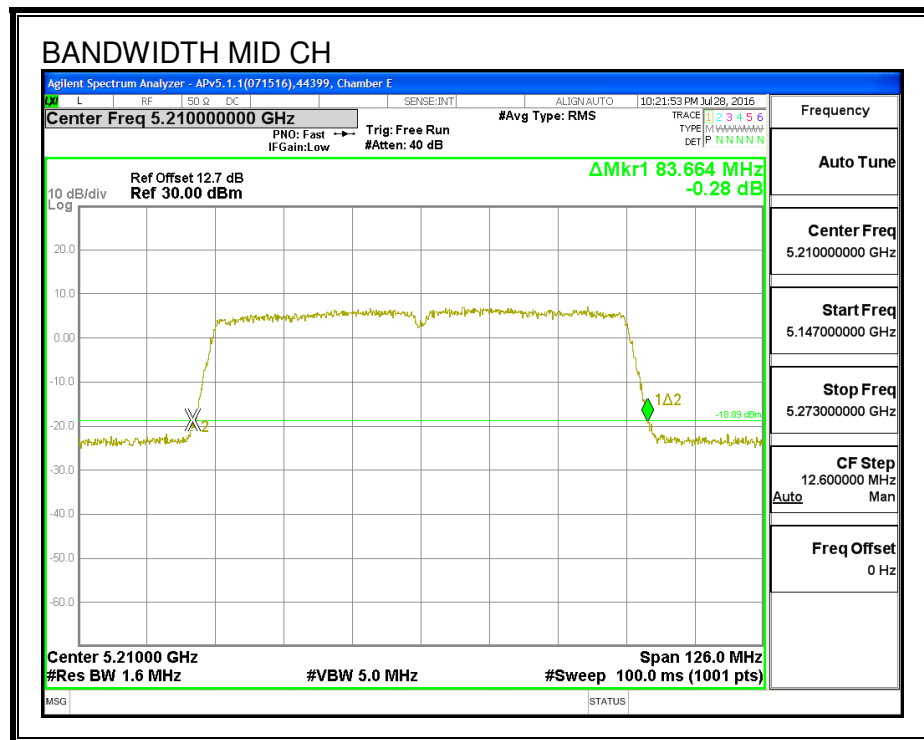

### 8.12.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.859

#### 99% BANDWIDTH

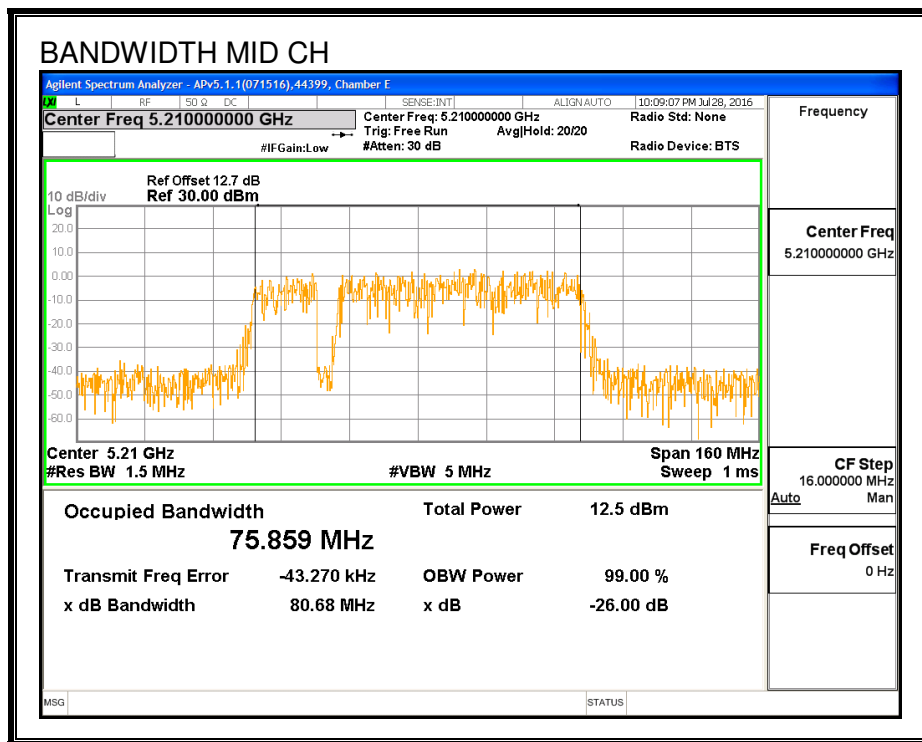

### 8.12.3. AVERAGE POWER (FCC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	12.46

## 8.12.4. OUTPUT POWER AND PSD (FCC)

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.



**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	7.00	7.00	23.00	10.00

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	12.46	12.46	23.00	-10.54

**PSD Results**

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-5.22	-5.00	10.00	-15.00

**PSD**

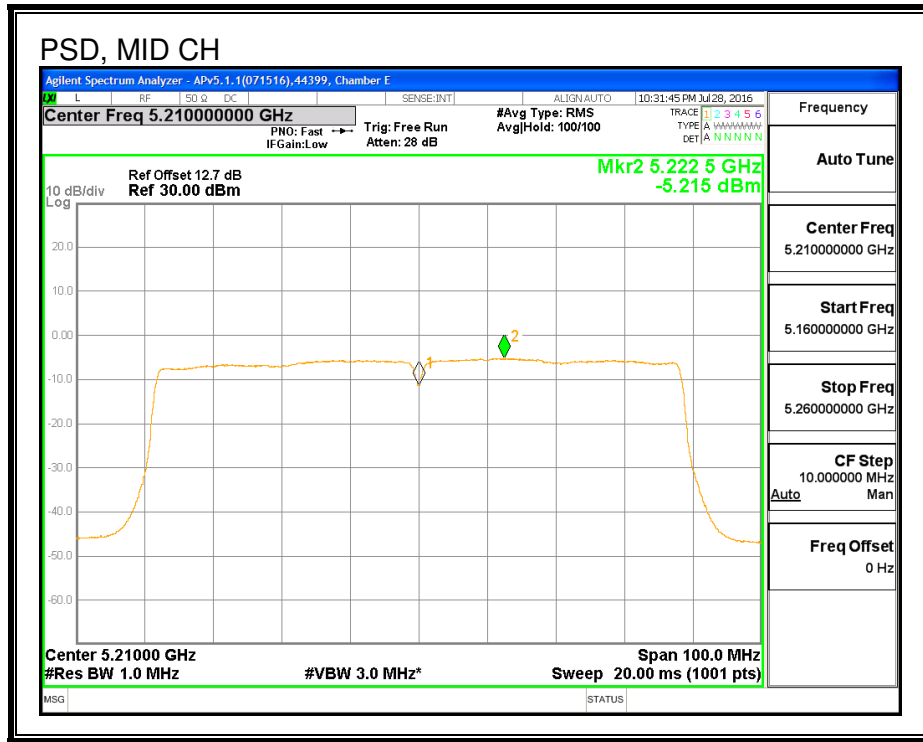

### 8.12.5. AVERAGE POWER (IC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	12.42

## 8.12.6. OUTPUT POWER AND PSD (IC)

### LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

### TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
42	5210	75.86	7.00

**Limits**

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
42	5210	23.00	16.00	10.00	3.00

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PPSD</b>
---------------------------	------	--


**Output Power Results**

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	12.42	12.42	16.00	-3.58

**PPSD Results**

Channel	Frequency (MHz)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-3.30	-3.08	3.00	-6.08

**PSD**

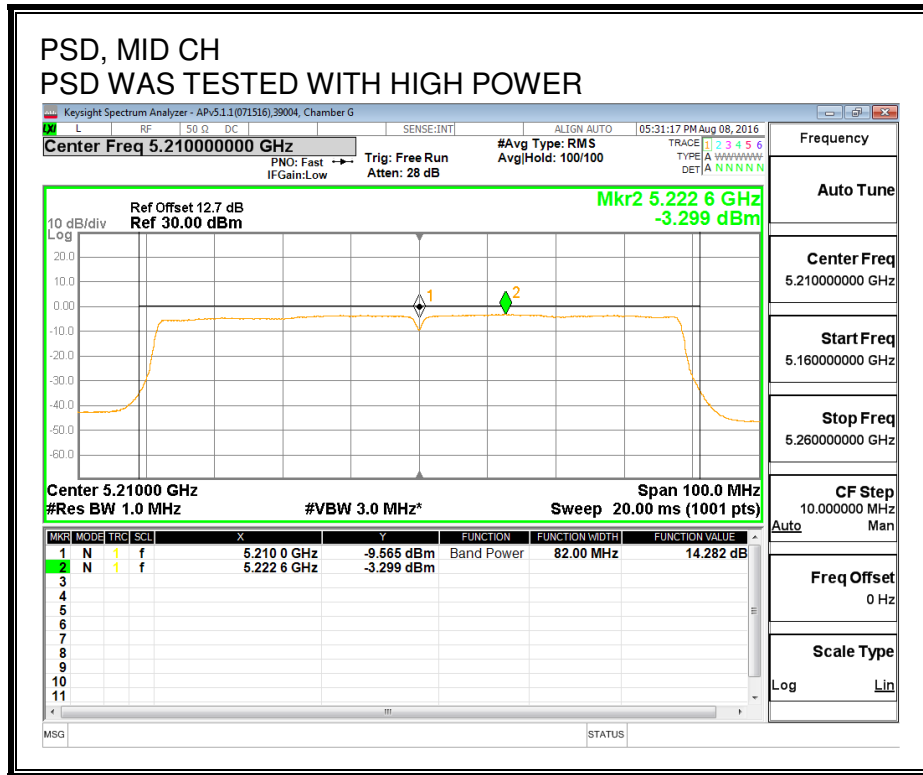

### 8.13. 802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND

#### 8.13.1. 26 dB BANDWIDTH


##### LIMITS

None; for reporting purposes only.


##### RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Mid	5210	83.000	82.875

**26 DB BANDWIDTH, CHAIN 0**

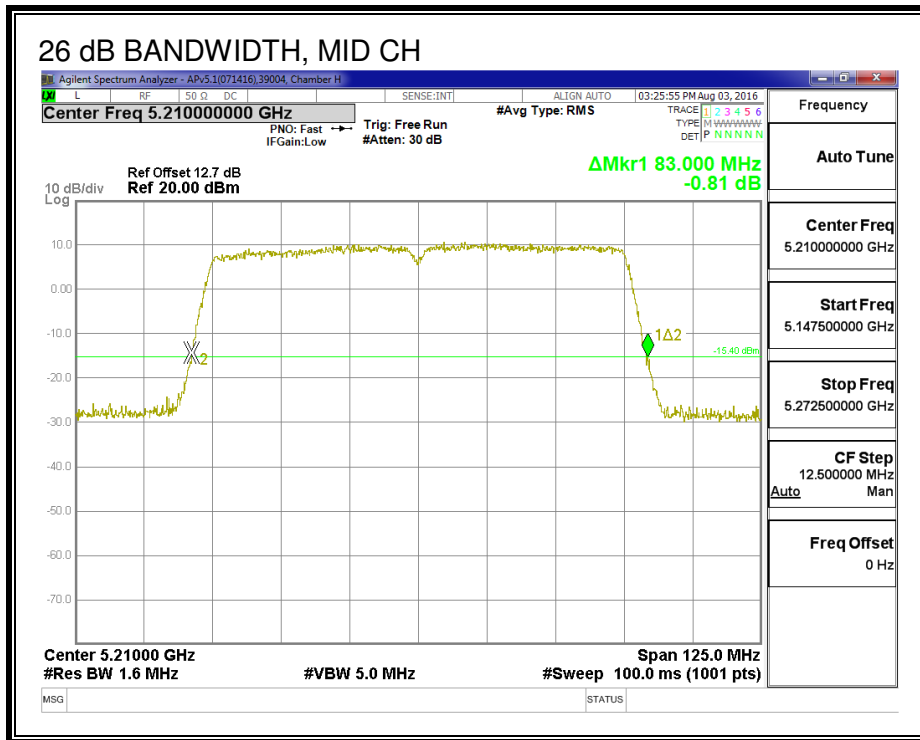

**26 DB BANDWIDTH, CHAIN 1**

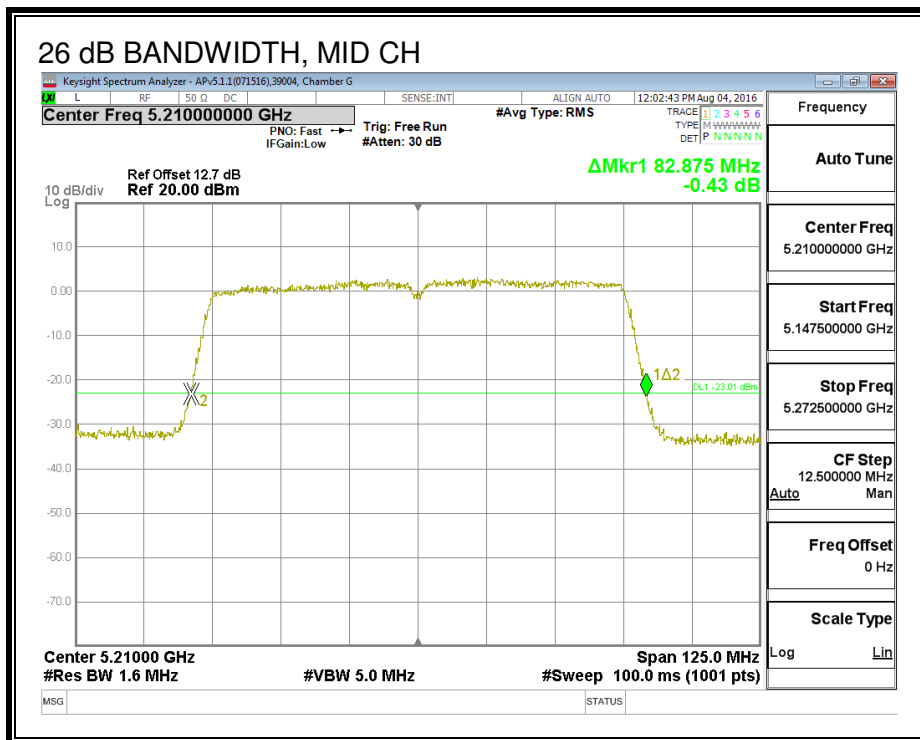



### 8.13.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Mid	5210	75.685	72.773

**99% BANDWIDTH, CHAIN 0**

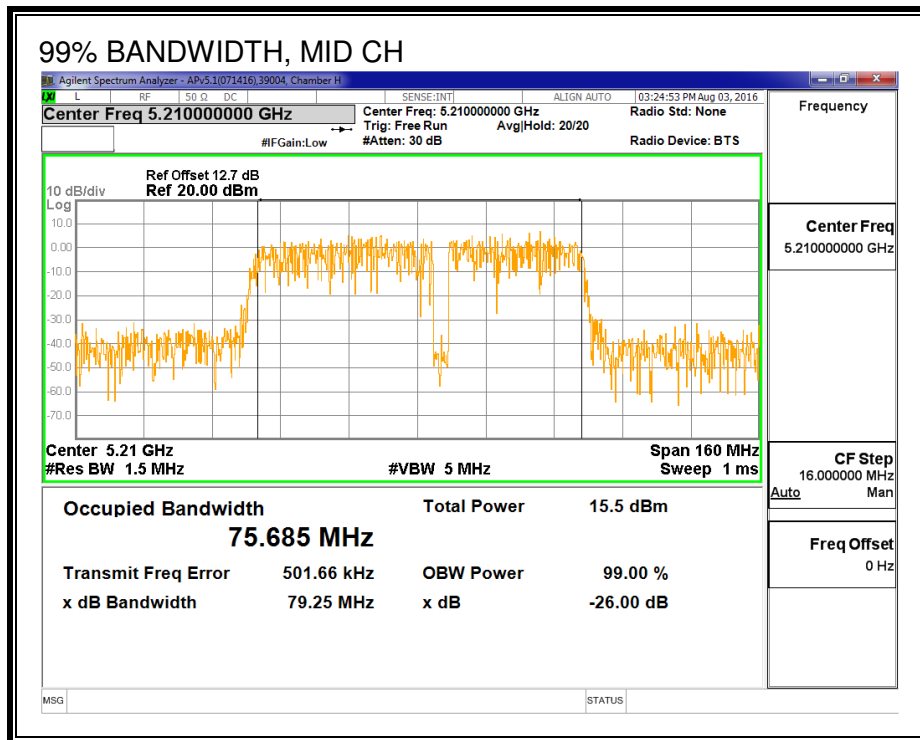

**99% BANDWIDTH, CHAIN 1**

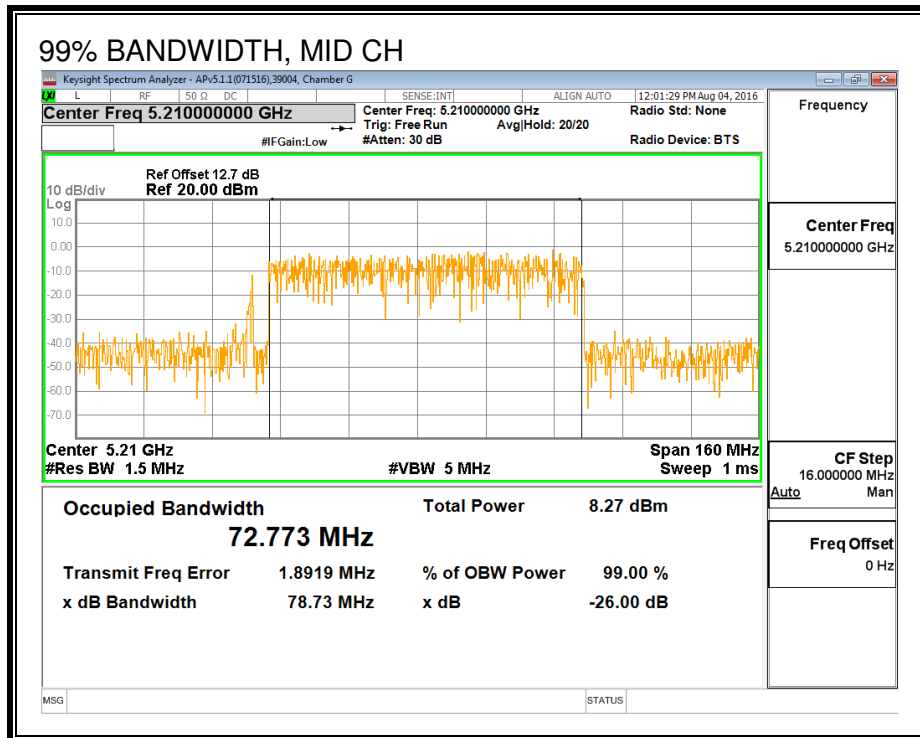

### 8.13.3. AVERAGE POWER (FCC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	7.90	7.76	10.84

### 8.13.4. OUTPUT POWER AND PSD (FCC)

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
6.60	7.00	6.80

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
6.60	7.00	9.81

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	6.80	9.81	23.20	7.19

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	7.90	7.76	10.84	23.20	-12.36


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-9.58	-9.77	-6.44	7.19	-13.63

**PSD, CHAIN 0**

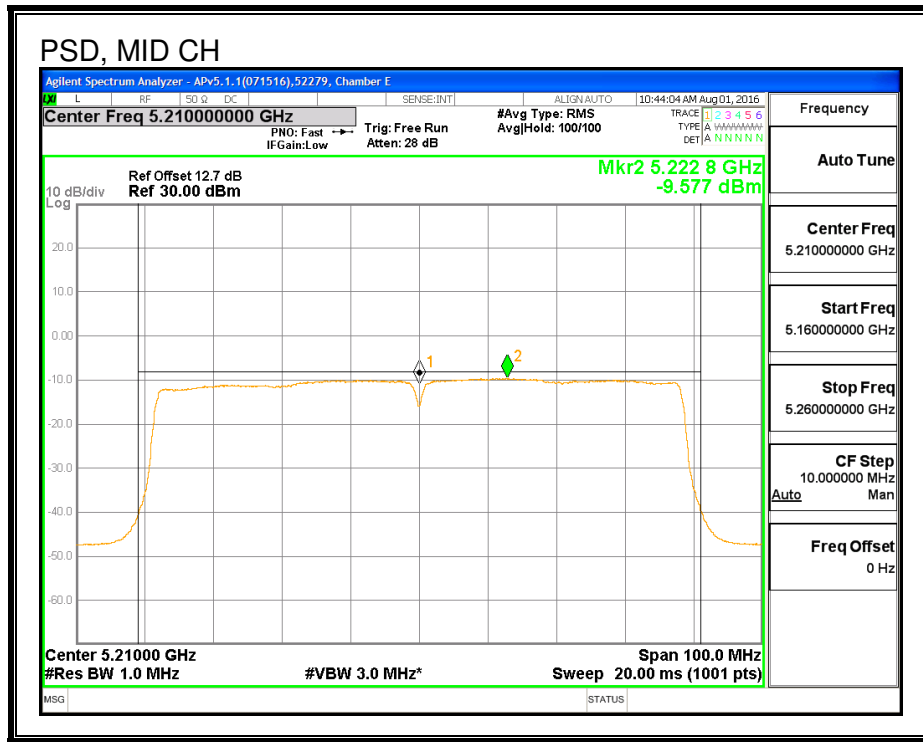

**PSD, CHAIN 1**

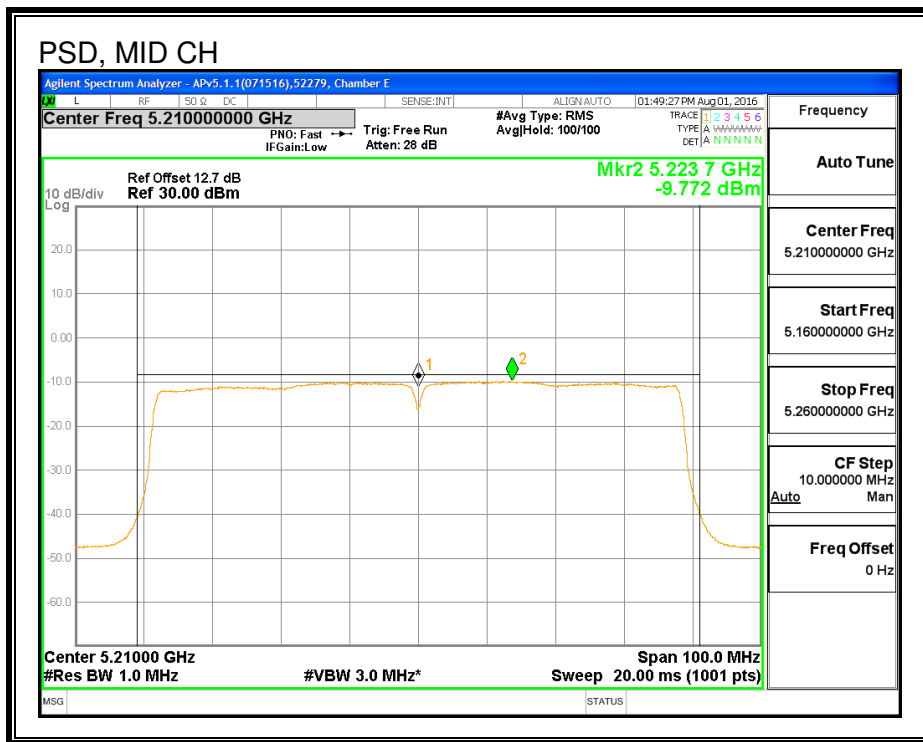

### 8.13.5. AVERAGE POWER (IC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	52279	<b>Date:</b>	8/1/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	7.90	7.93	10.93



### 8.13.6. OUTPUT POWER AND PSD (IC)

#### LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

#### TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
6.60	7.00	6.80

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
6.60	7.00	9.81

**RESULTS**

<b>ID:</b>	52279	<b>Date:</b>	8/1/16
------------	-------	--------------	--------

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
42	5210	72.77	6.80	9.81

**Limits**

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
42	5210	23.00	16.20	10.00	0.19

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PPSD</b>
---------------------------	------	--


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	7.90	7.93	10.93	16.20	-5.27


**PPSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-7.86	-7.79	-4.59	0.19	-4.78

**PSD, CHAIN 0**

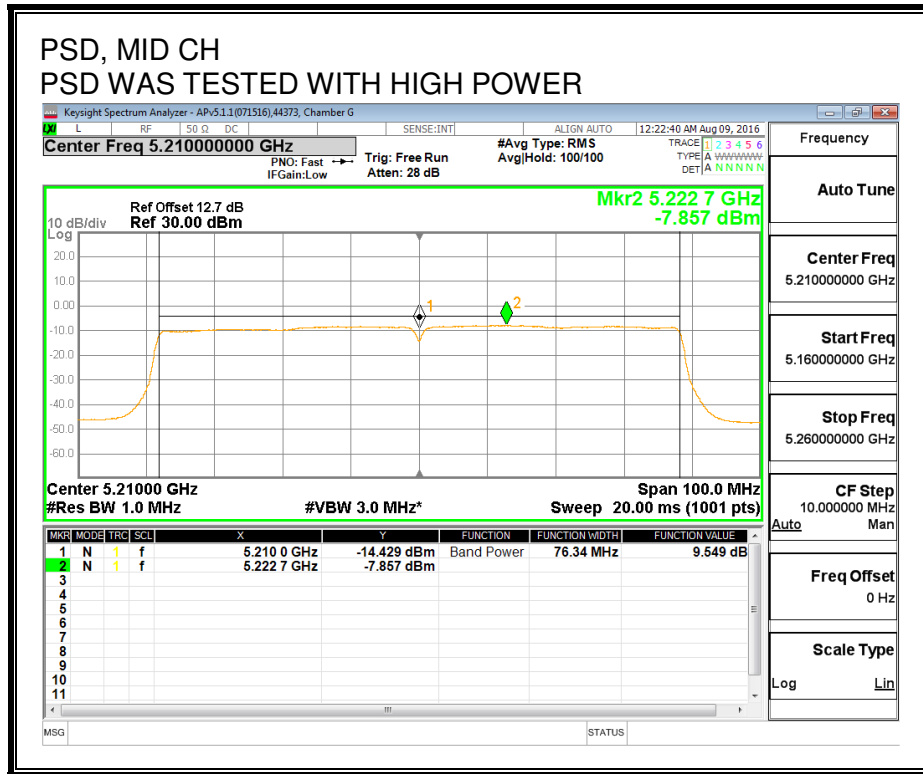

**PSD, CHAIN 1**

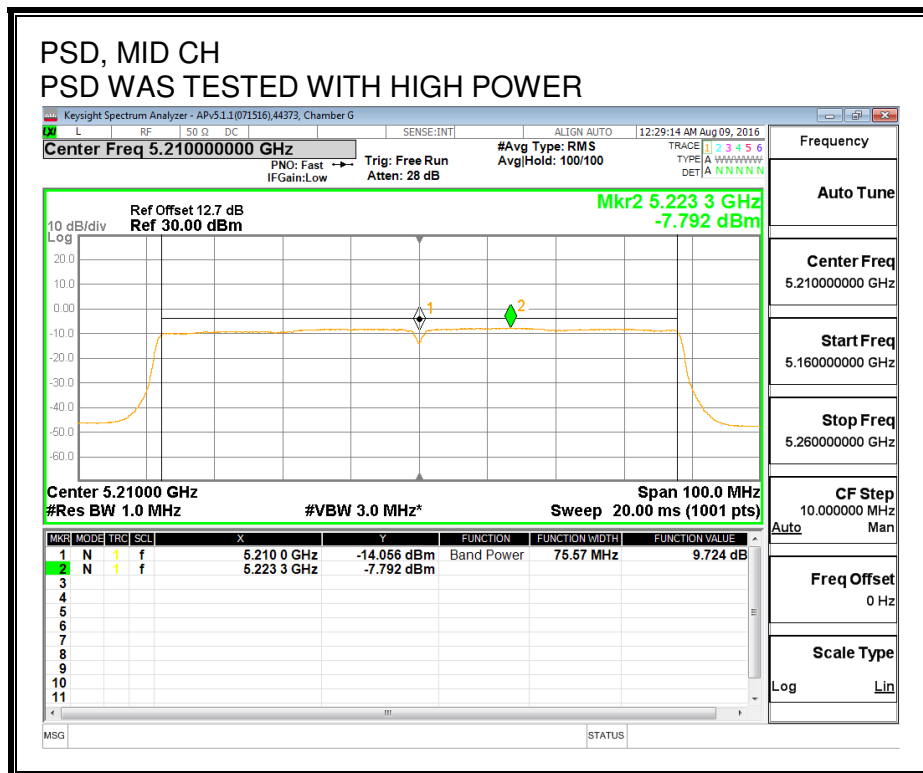

## 8.14. 802.11ac VHT80 2Tx STBC MODE IN THE 5.2 GHz BAND

### 8.14.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Mid	5210	82.875	82.832

**26 DB BANDWIDTH, CHAIN 0**

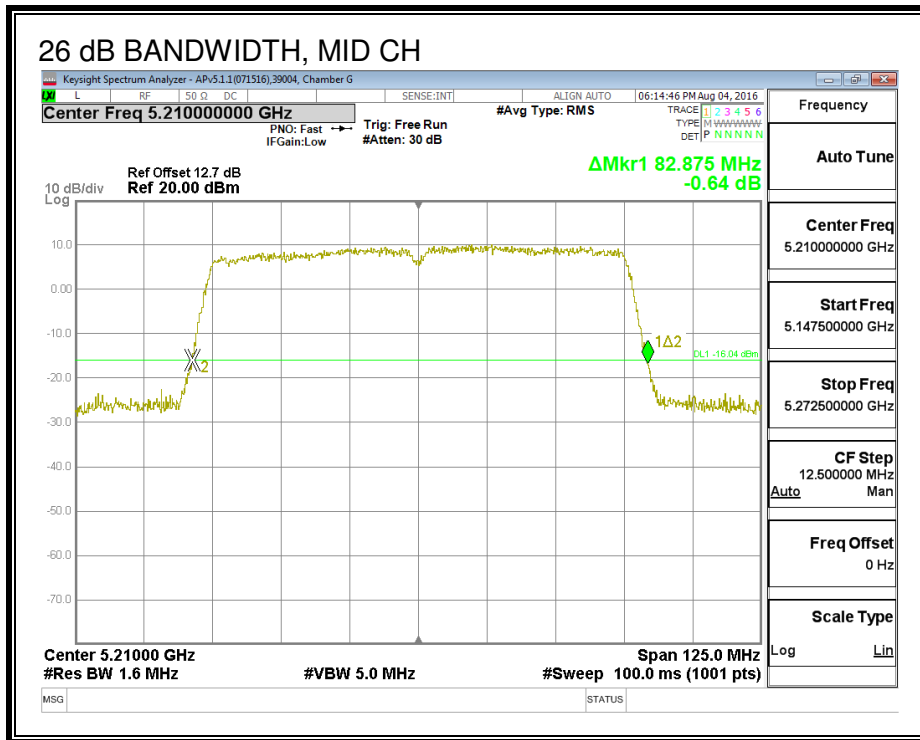

**26 DB BANDWIDTH, CHAIN 1**

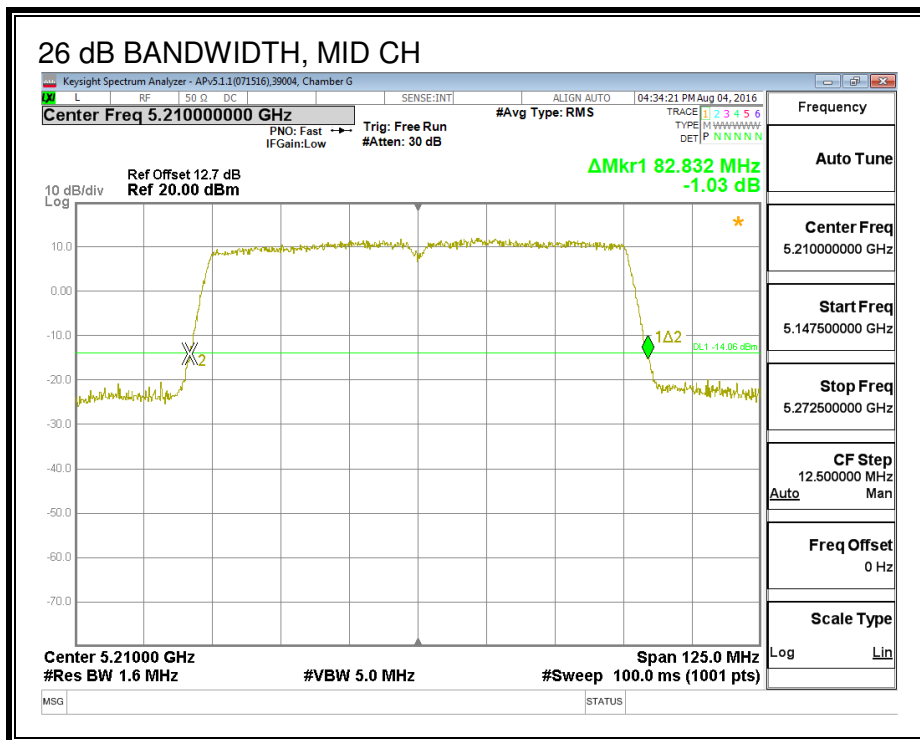

### 8.14.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Mid	5210	76.204	75.757

**99% BANDWIDTH, CHAIN 0**

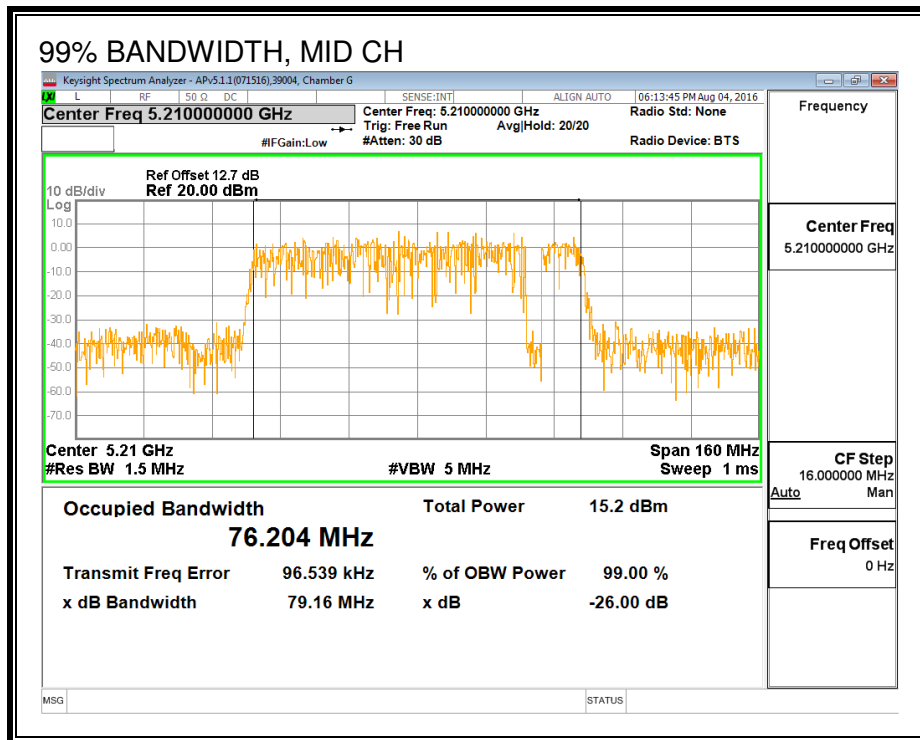

**99% BANDWIDTH, CHAIN 1**

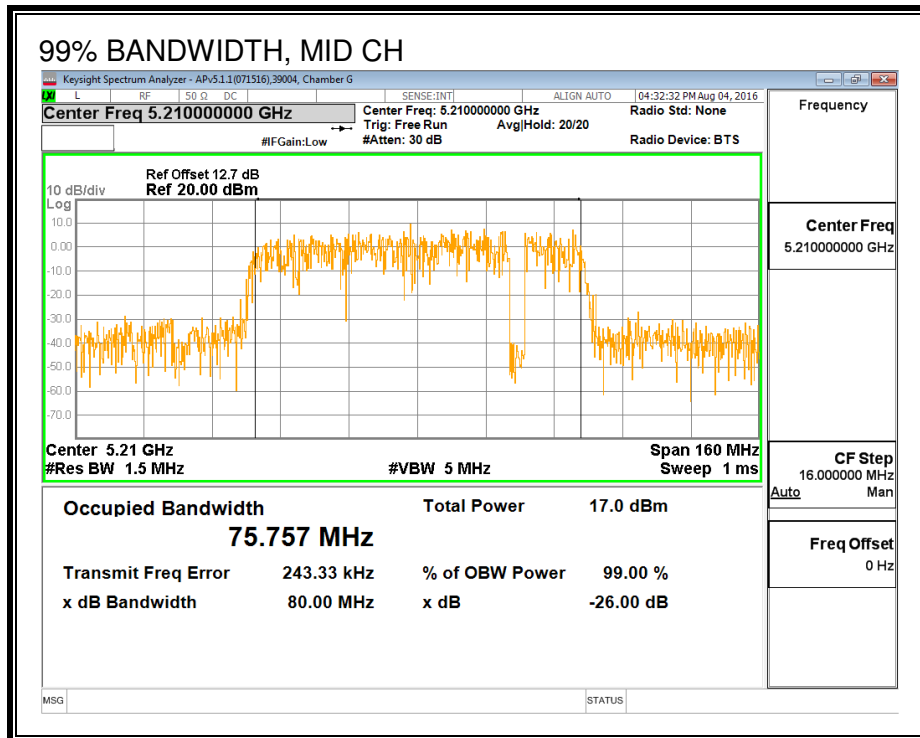

### 8.14.3. AVERAGE POWER (FCC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	8.87	8.93	11.91



#### 8.14.4. OUTPUT POWER AND PSD (FCC)

##### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
6.60	7.00	6.80

**RESULTS**

<b>ID:</b>	52279	<b>Date:</b>	8/1/16
------------	-------	--------------	--------

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	6.80	6.80	23.20	10.20

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.87	8.93	11.91	23.20	-11.29


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-8.64	-8.64	-5.41	10.20	-15.61

**PSD, CHAIN 0**

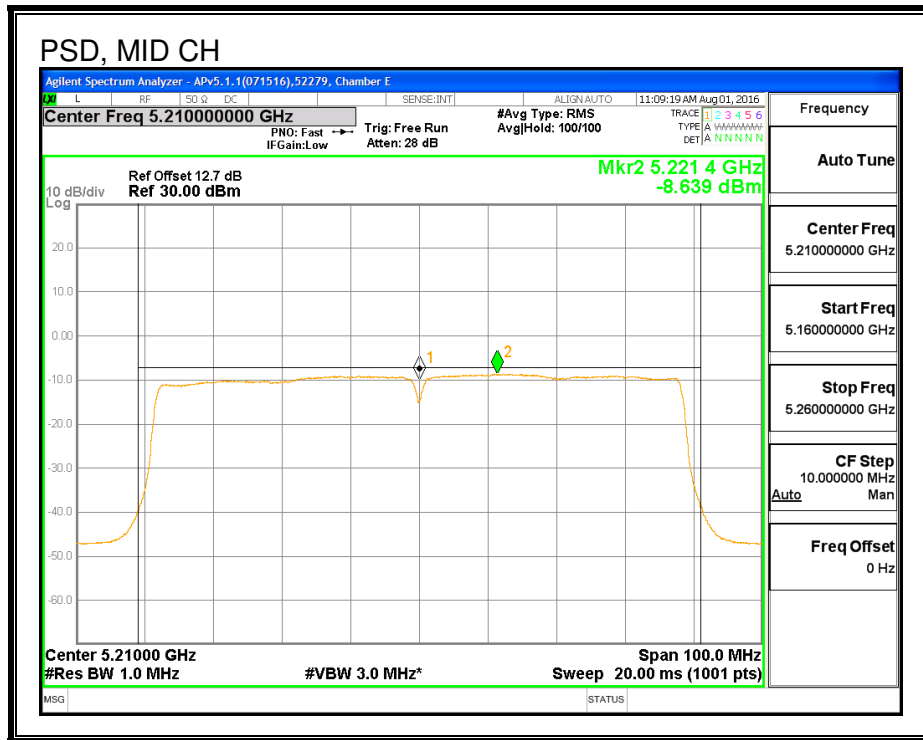

**PSD, CHAIN 1**

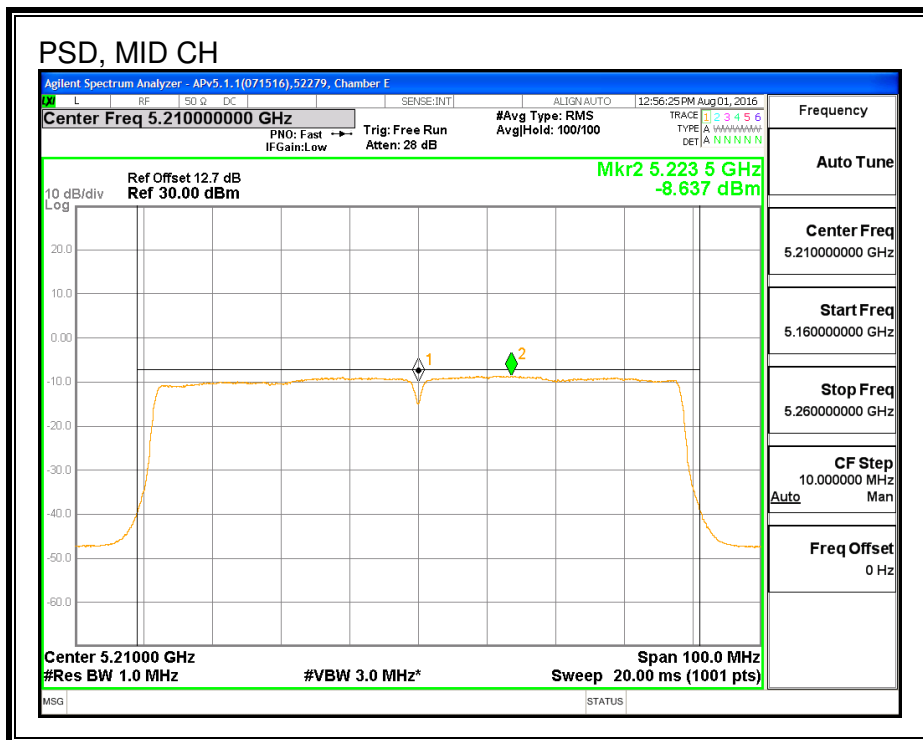

### 8.14.5. AVERAGE POWER (IC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	8.94	8.97	11.97

### 8.14.6. OUTPUT POWER AND PSD (IC)

#### LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

#### TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
6.60	7.00	6.80

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
42	5210	75.76	6.80	6.80

**Limits**

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
42	5210	23.00	16.20	10.00	3.20

<b>Duty Cycle CF (dB)</b>	0.22	<b>Included in Calculations of Corr'd PPSD</b>
---------------------------	------	--


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	8.94	8.97	11.97	16.20	-4.23


**PPSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-4.79	-5.08	-1.70	3.20	-4.90

**PSD, CHAIN 0**

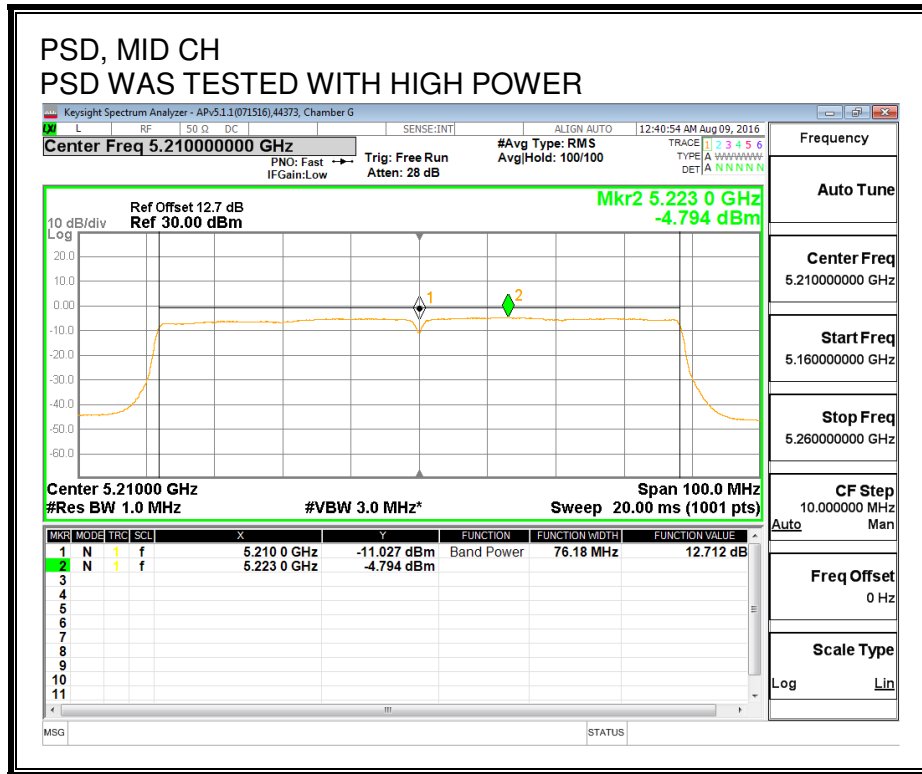

**PSD, CHAIN 1**

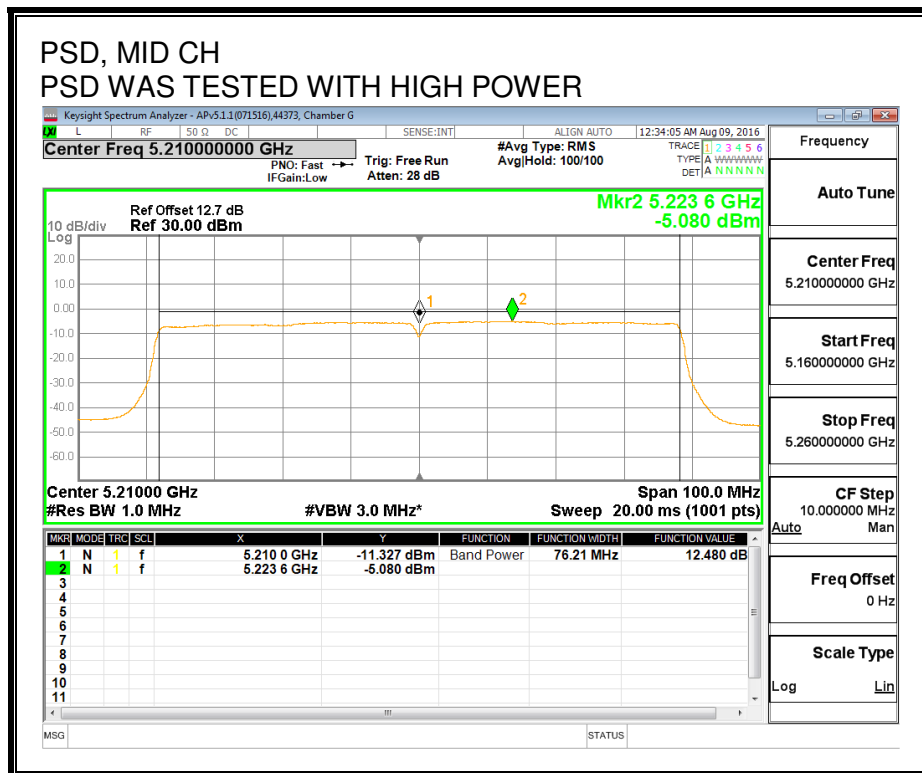



**8.15. 802.11ac VHT80 2Tx BEAM FORMING MODE IN THE 5.2 GHz BAND**

**8.15.1. 26 dB BANDWIDTH**


**LIMITS**

None; for reporting purposes only.


**RESULTS**

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Mid	5210	81.630	82.490

**26 DB BANDWIDTH, CHAIN 0**

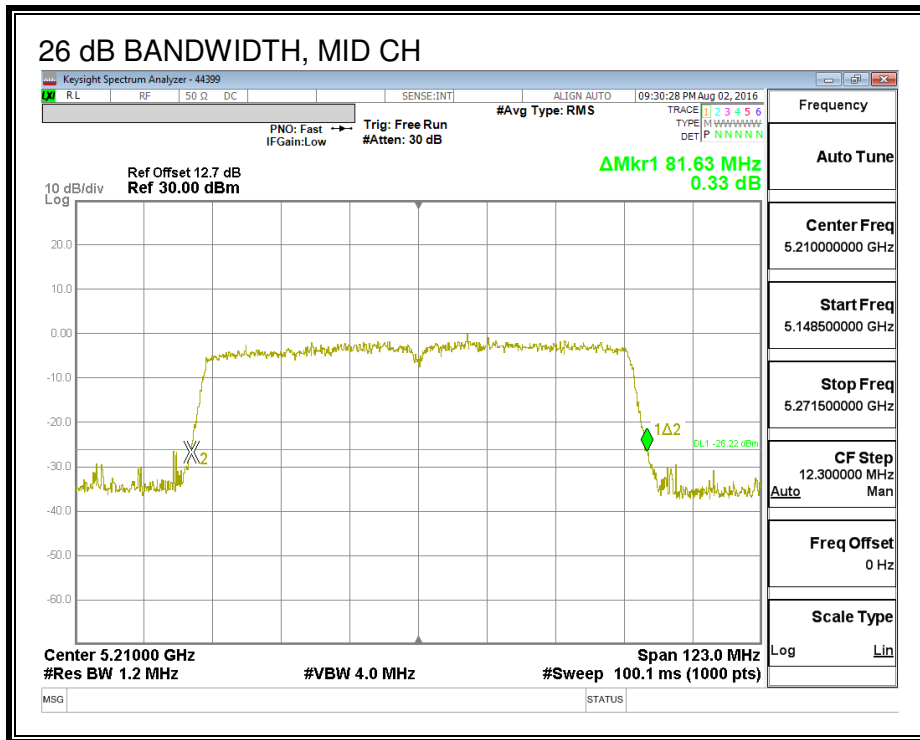

**26 DB BANDWIDTH, CHAIN 1**

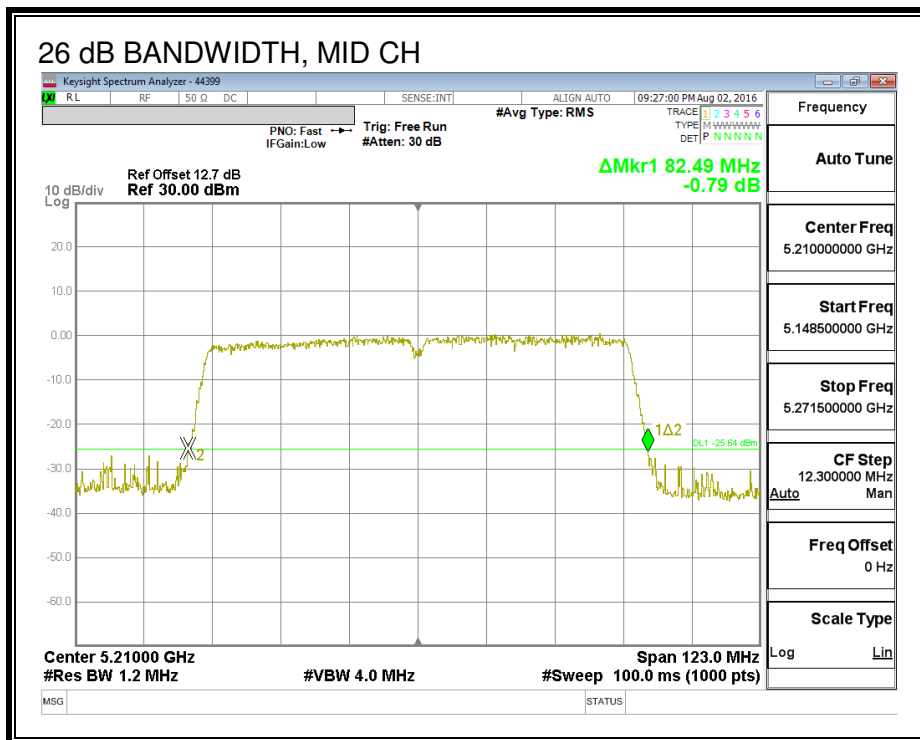

### 8.15.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Mid	5210	75.761	76.214

**99% BANDWIDTH, CHAIN 0**

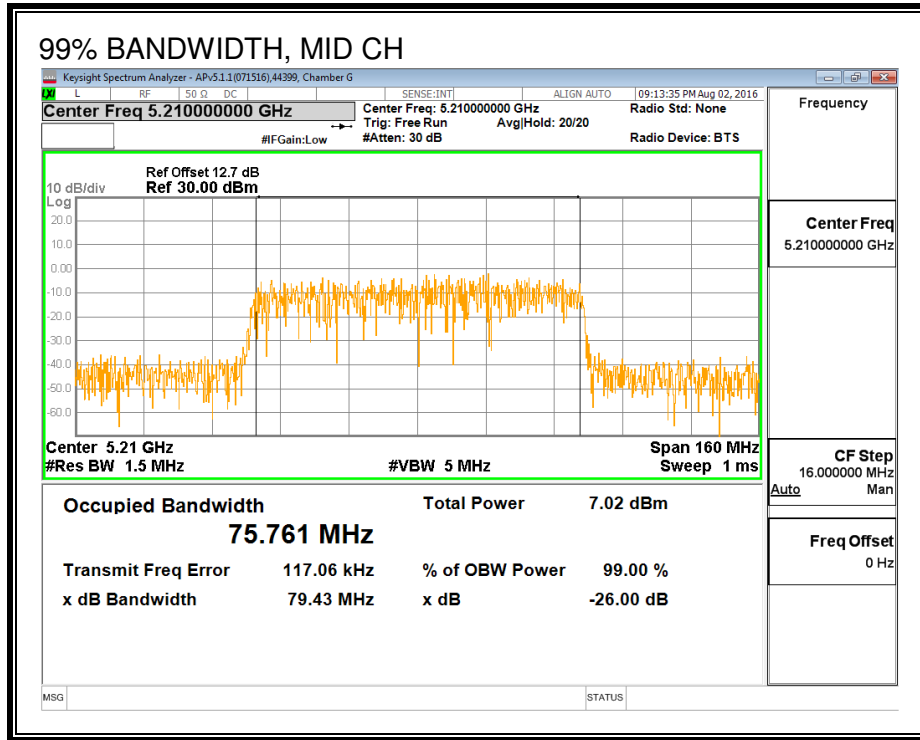

**99% BANDWIDTH, CHAIN 1**

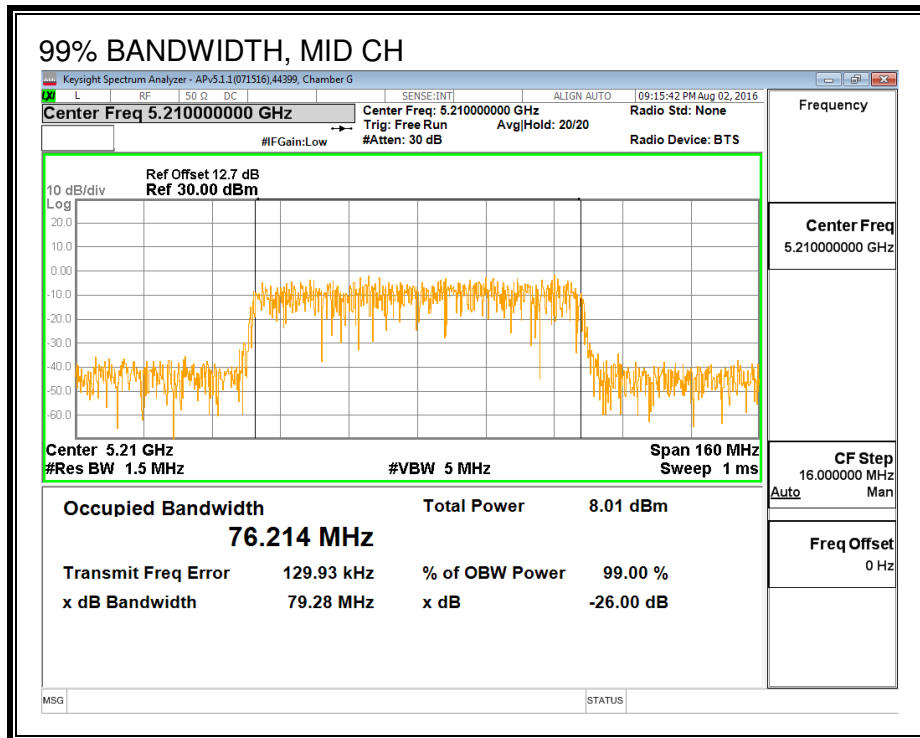

### 8.15.3. AVERAGE POWER (FCC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	6.44	6.40	9.43

## 8.15.4. OUTPUT POWER AND PSD (FCC)

### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**DIRECTIONAL ANTENNA GAIN**

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
6.60	7.00	9.81

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	9.81	9.81	20.19	7.19

<b>Duty Cycle CF (dB)</b>	0.33	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	6.44	6.40	9.43	20.19	-10.76

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-11.66	-11.86	-8.42	7.19	-15.61



**PSD, CHAIN 0**

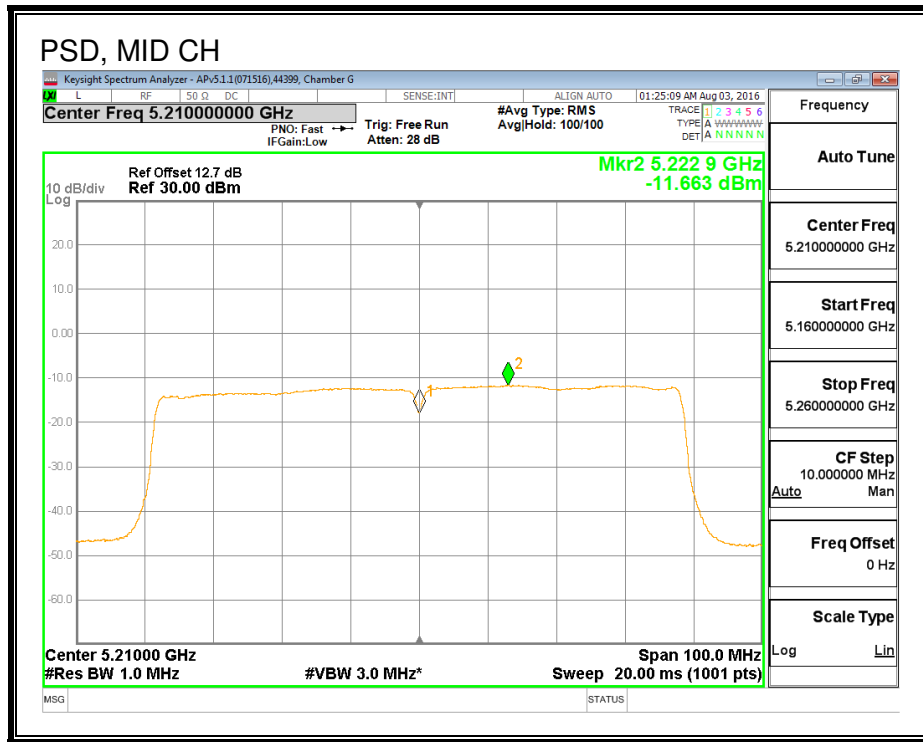

**PSD, CHAIN 1**

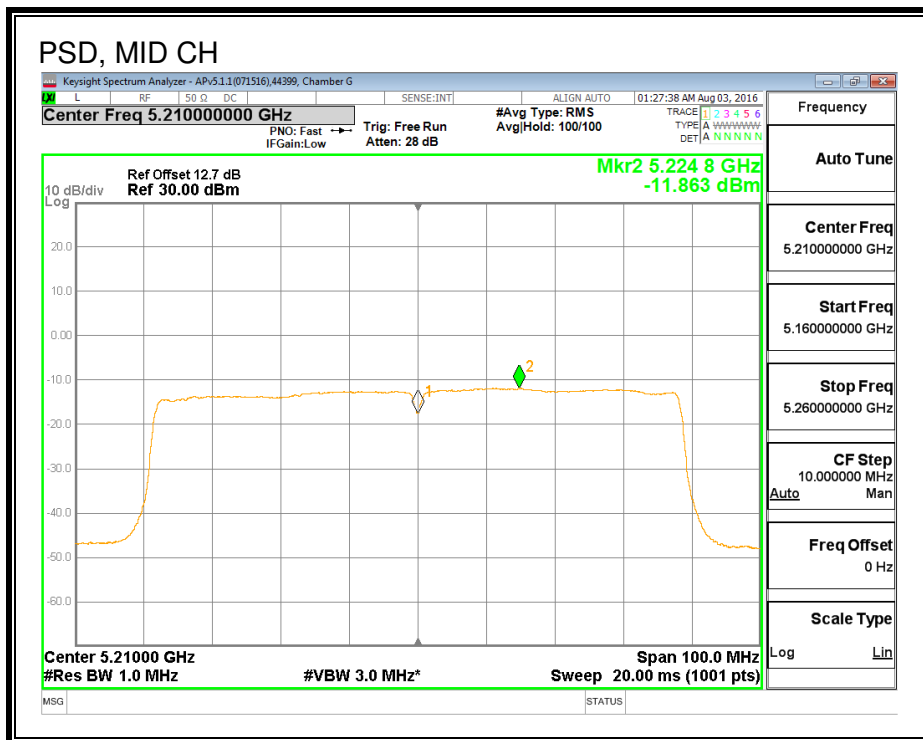

### 8.15.5. AVERAGE POWER (IC)

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	52279	<b>Date:</b>	8/3/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Mid	5210	6.45	6.42	9.45

### 8.15.6. OUTPUT POWER AND PSD (IC)

#### LIMITS

IC RSS-247 (6.2.1) (1)

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

#### TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 12.7 dB (including 10 dB pad and 2.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.60	7.00	9.81

**RESULTS**

<b>ID:</b>	52279	<b>Date:</b>	8/3/16
------------	-------	--------------	--------

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
42	5210	75.76	9.81	9.81

**Limits**

Channel	Frequency (MHz)	IC EIRP Limit (dBm)	Max IC Power (dBm)	IC eirp PSD Limit (dBm)	Max IC PSD (dBm)
42	5210	23.00	13.19	10.00	0.19

<b>Duty Cycle CF (dB)</b>	0.33	<b>Included in Calculations of Corr'd PPSD</b>
---------------------------	------	--


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	6.45	6.42	9.45	13.19	-3.74


**PPSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-8.26	-8.25	-4.92	0.19	-5.11

**PSD, CHAIN 0**

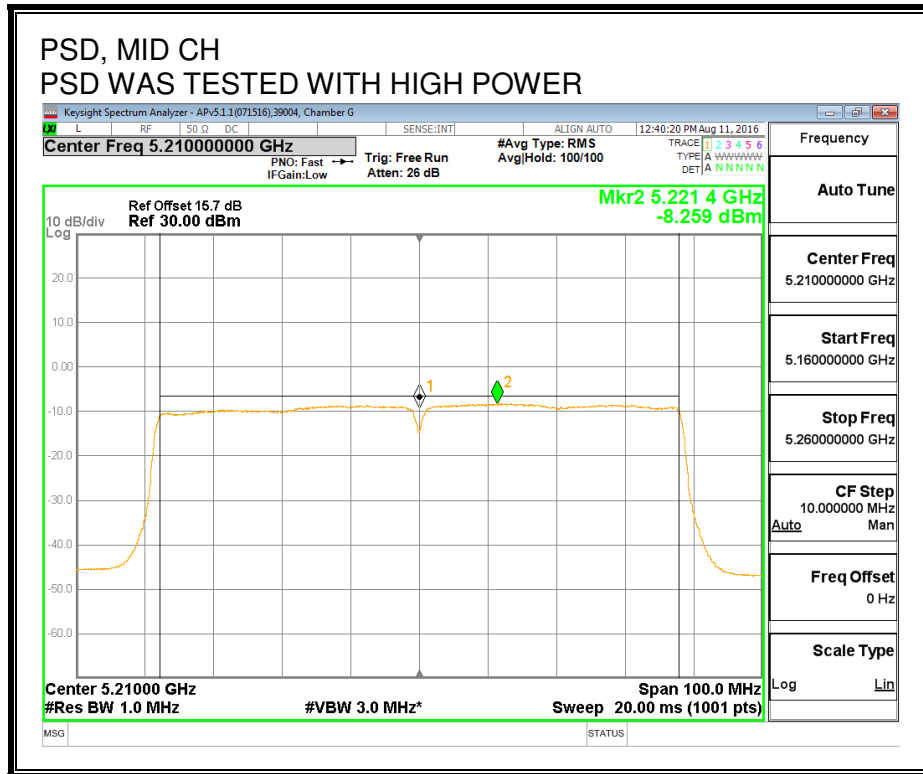

**PSD, CHAIN 1**

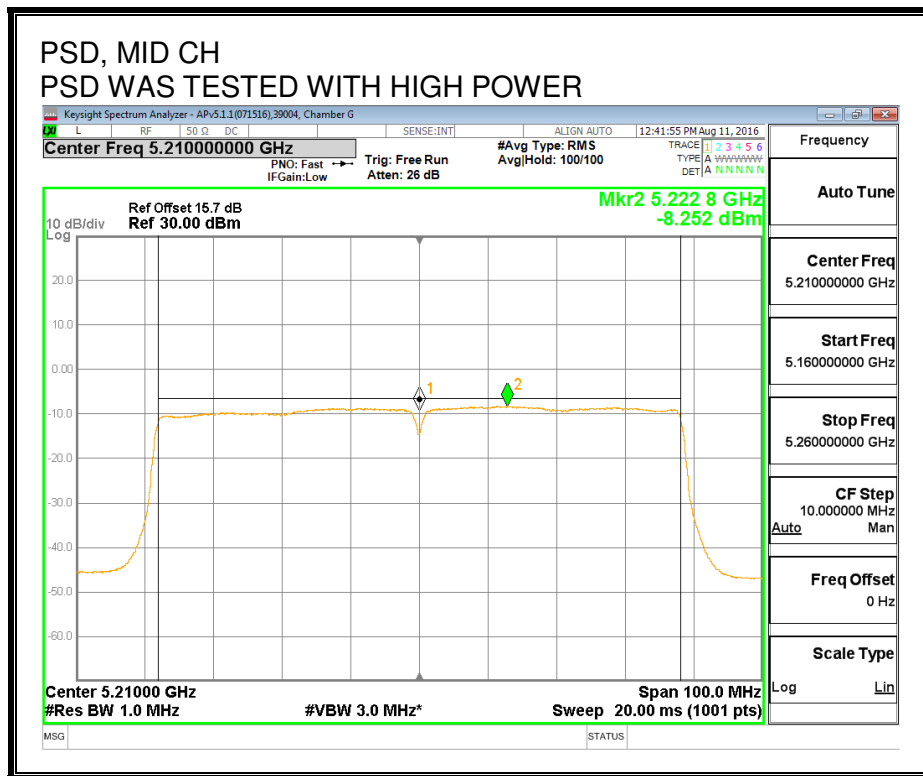

## 8.16. 802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND

### 8.16.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.202
Mid	5300	22.032
High	5320	22.304

**26 dB BANDWIDTH**

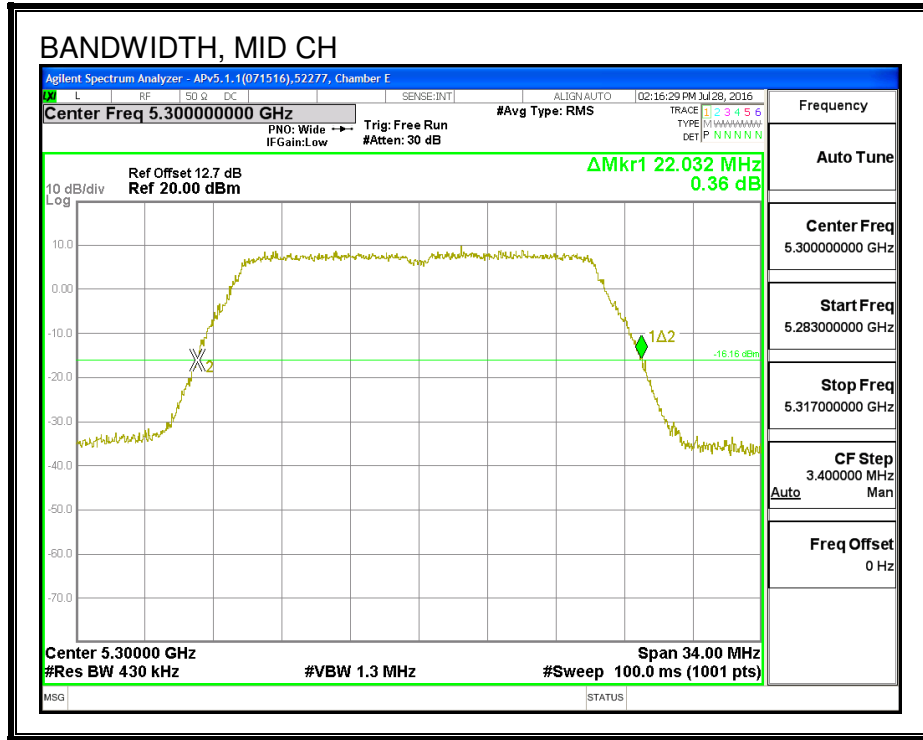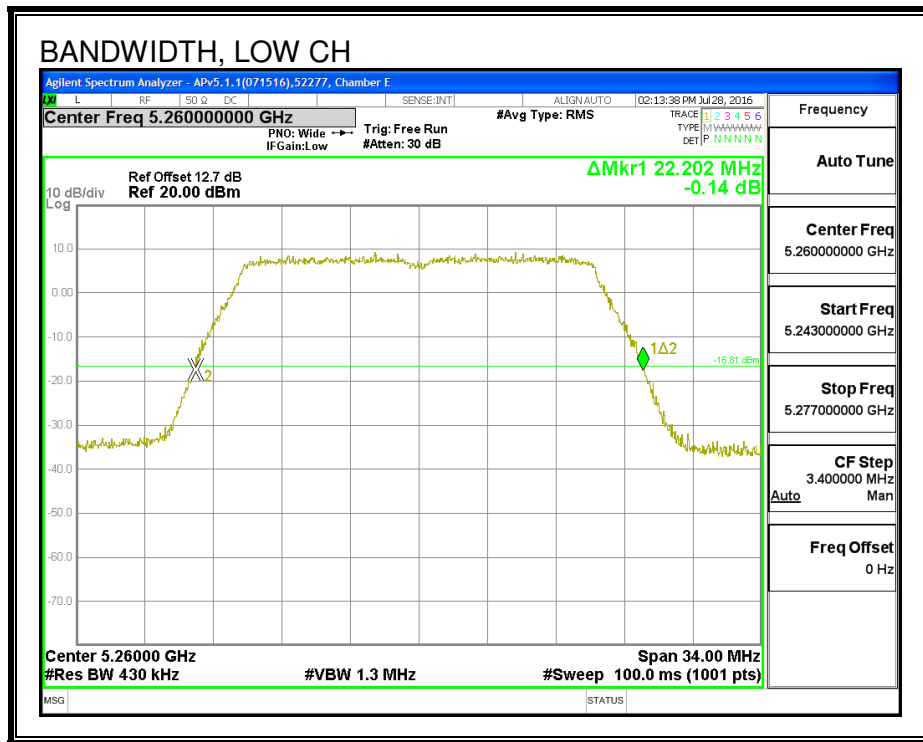

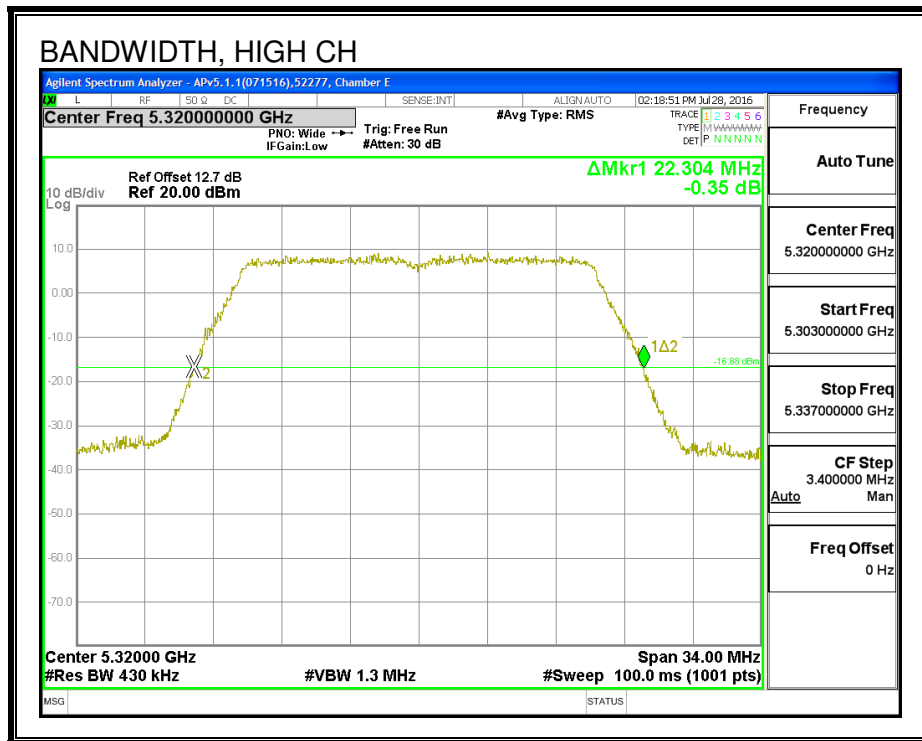



### 8.16.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.834
Mid	5300	17.779
High	5320	17.831

**99% BANDWIDTH**

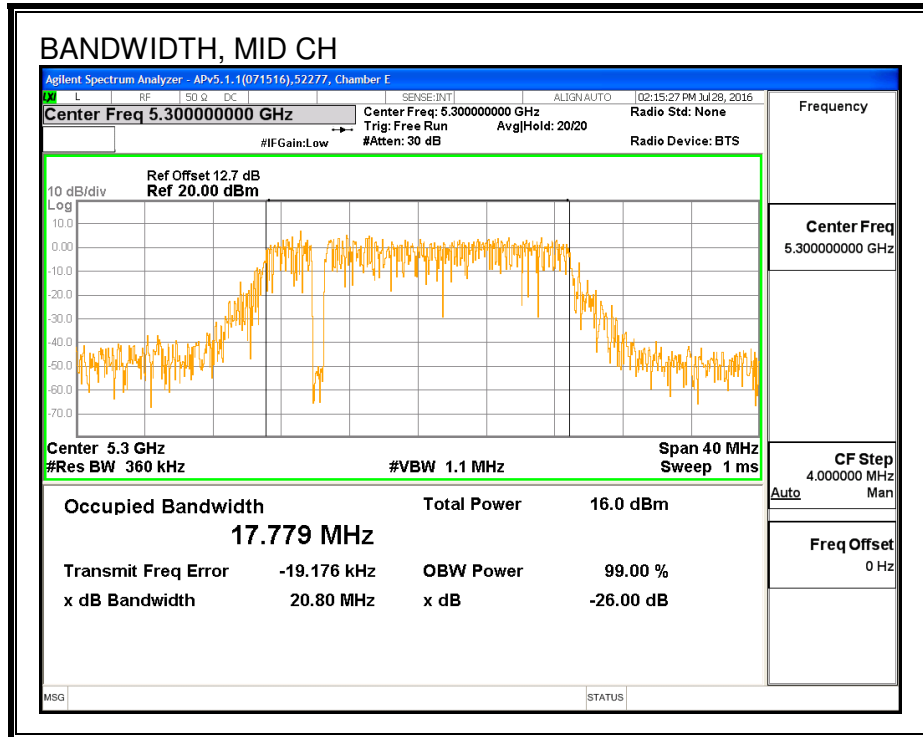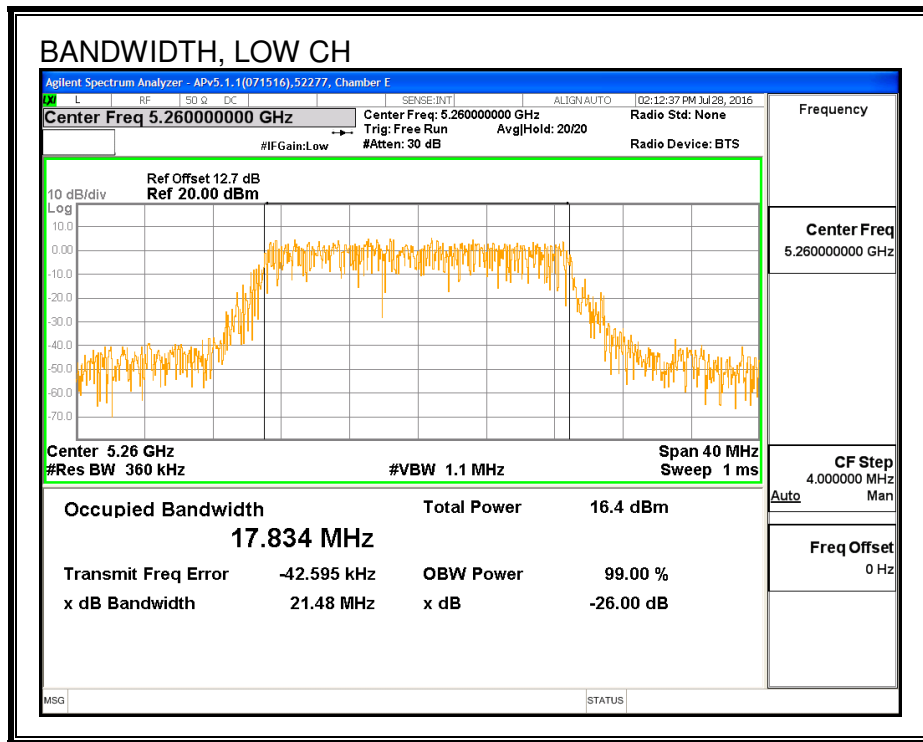

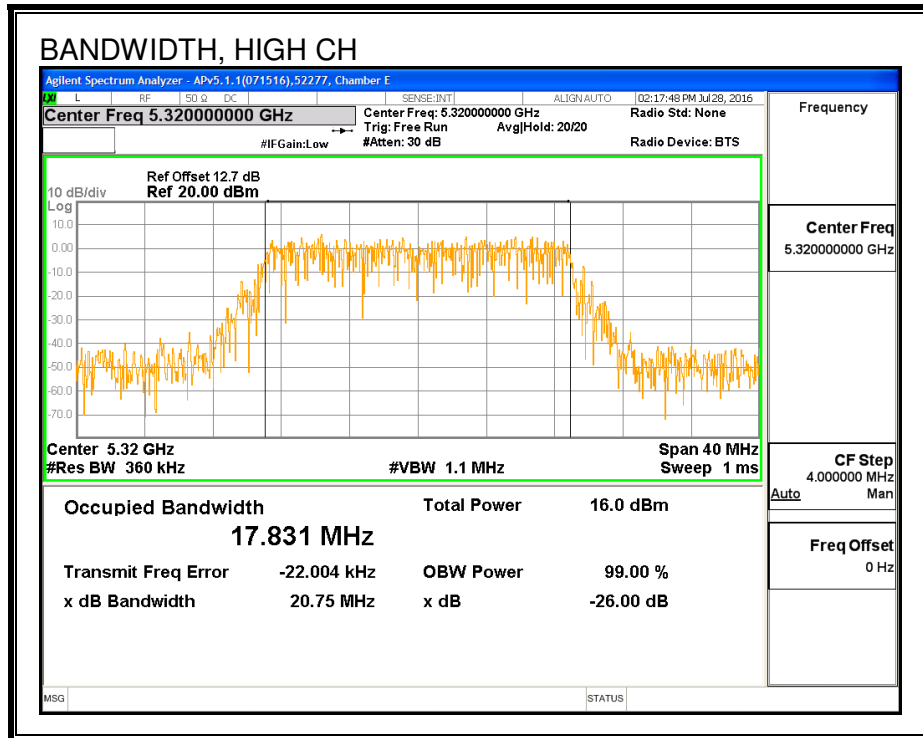

### 8.16.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	12.39
Mid	5300	12.43
High	5320	12.38

## 8.16.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.20	17.83	7.10	22.41	9.90
Mid	5300	22.03	17.78	7.10	22.40	9.90
High	5320	22.30	17.83	7.10	22.41	9.90

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	12.39	12.39	22.41	-10.02
Mid	5300	12.43	12.43	22.40	-9.97
High	5320	12.38	12.38	22.41	-10.03

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.96	4.96	9.90	-4.94
Mid	5300	5.01	5.01	9.90	-4.90
High	5320	3.47	3.47	9.90	-6.43

**PSD**

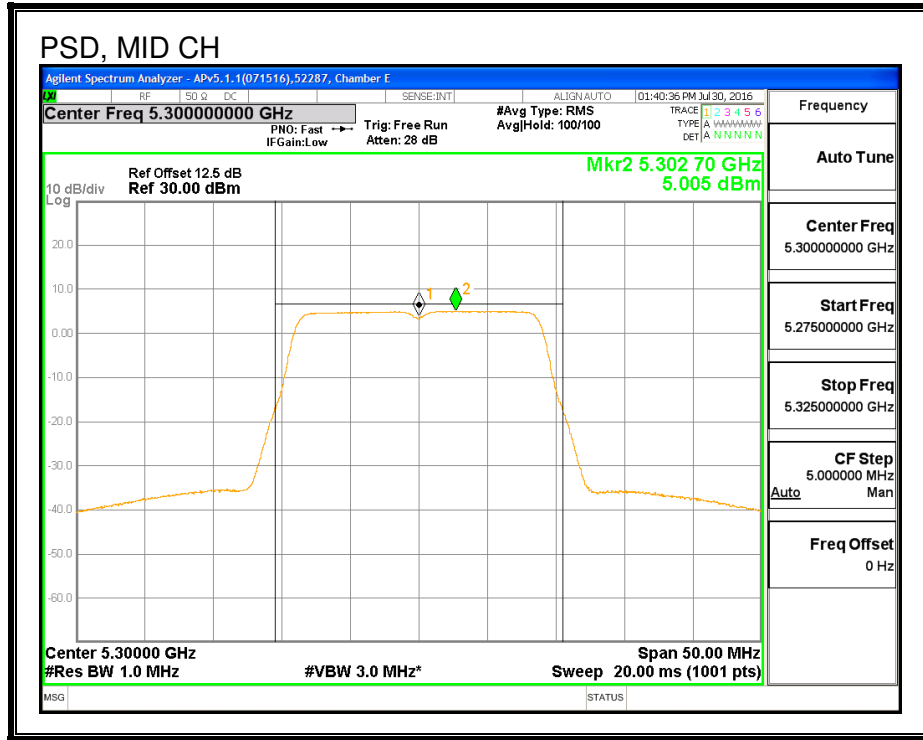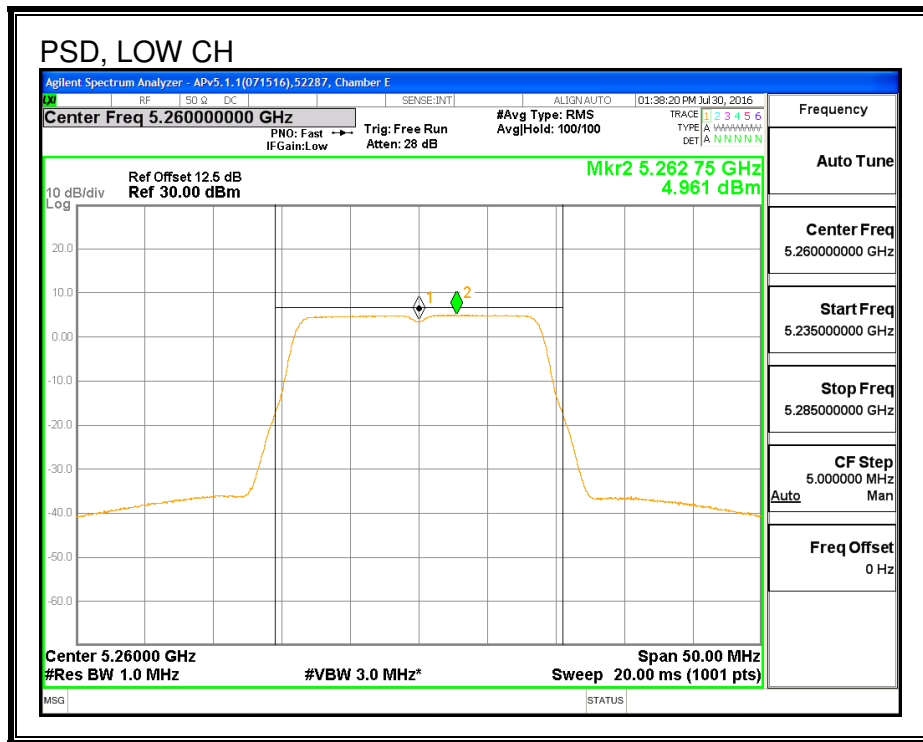

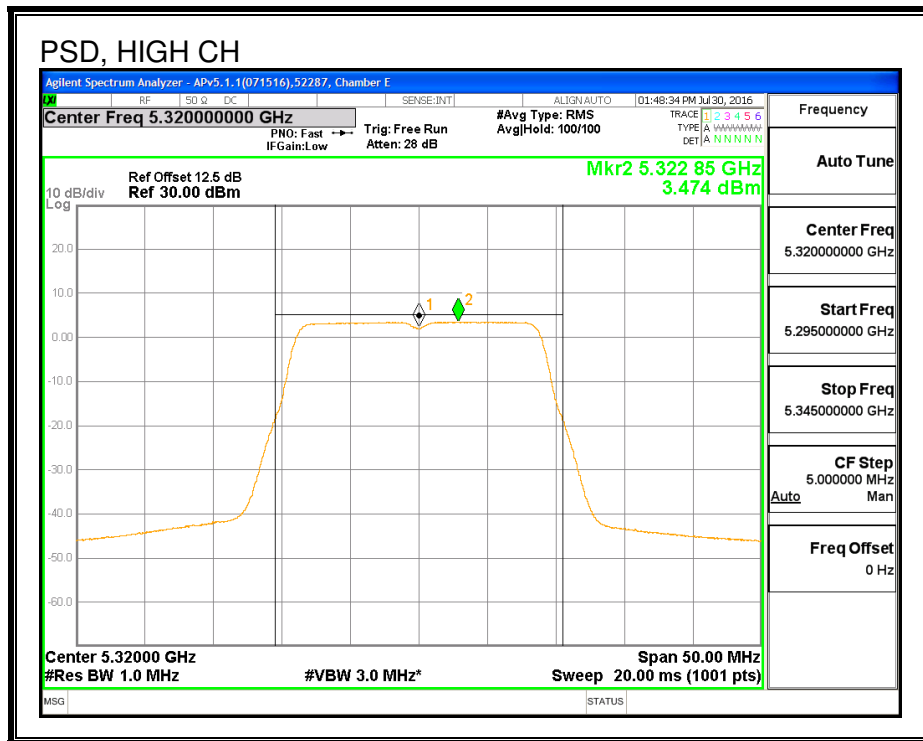



## 8.17. 802.11n HT20 CHAIN 1 MODE IN THE 5.3 GHz BAND

### 8.17.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.304
Mid	5300	22.304
High	5320	22.406

**26 dB BANDWIDTH**

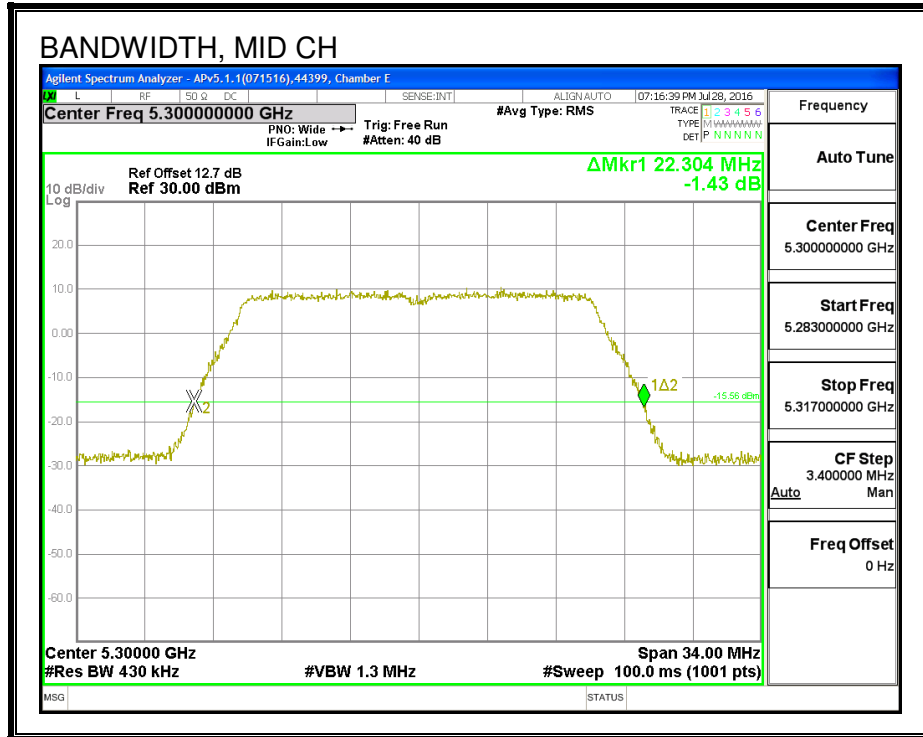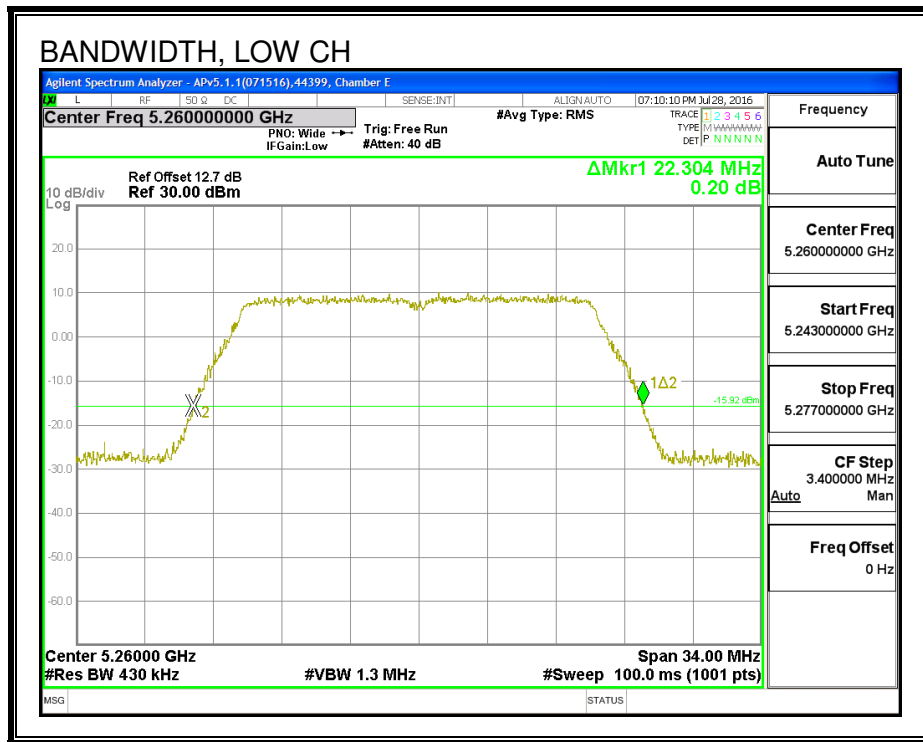

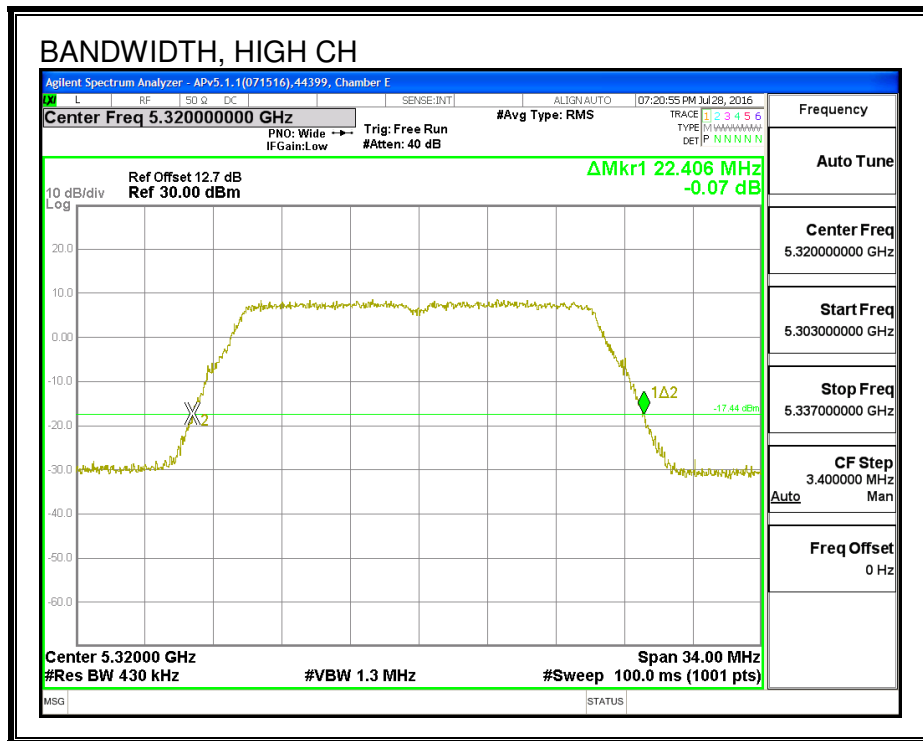

### 8.17.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.778
Mid	5300	17.883
High	5320	17.882

**99% BANDWIDTH**

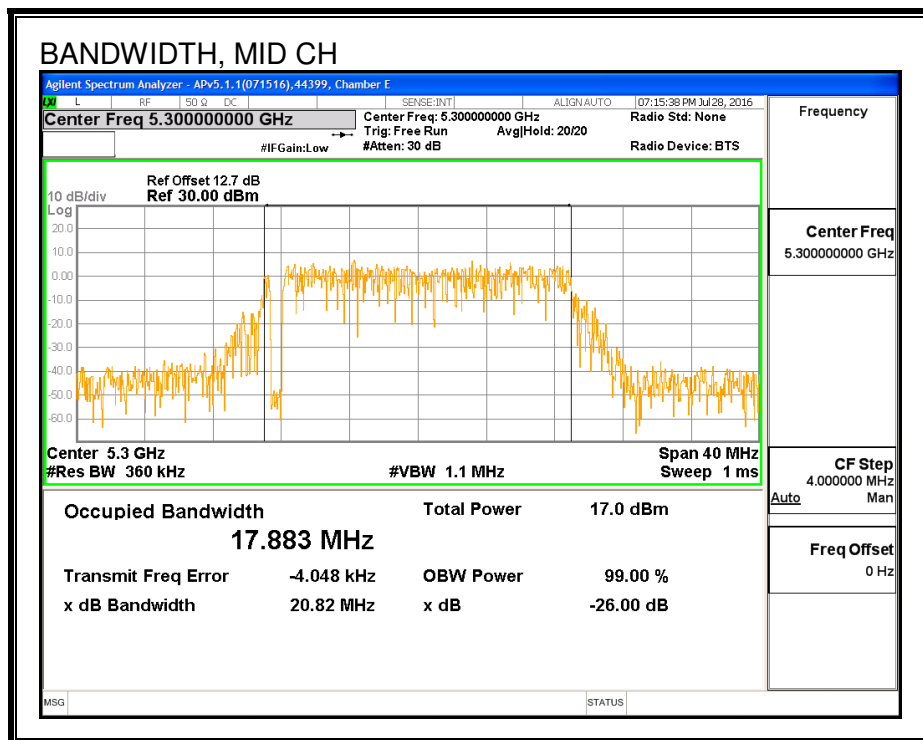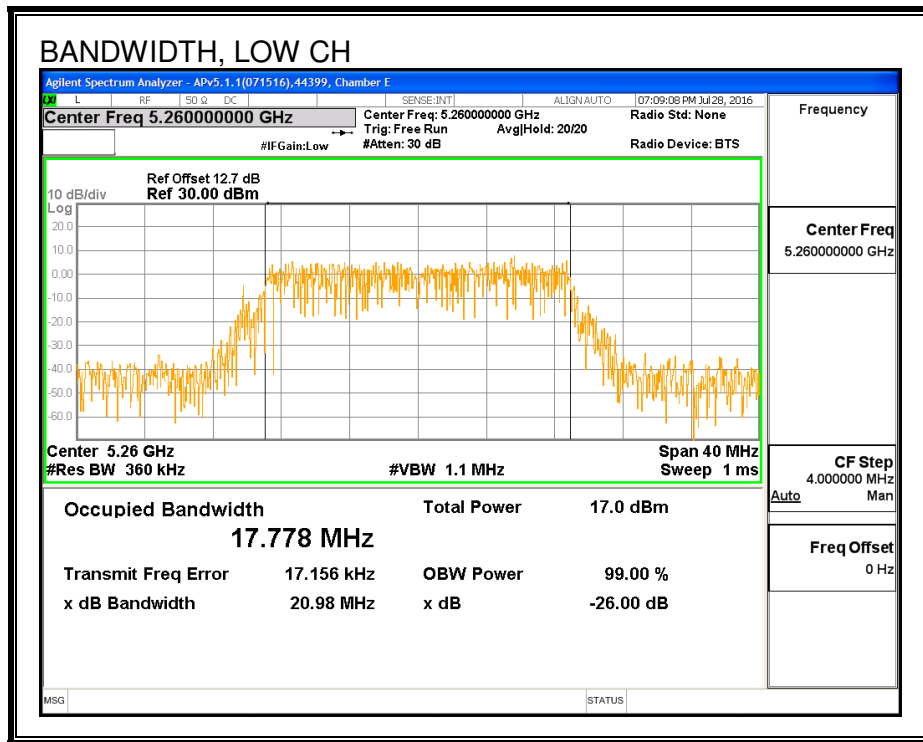

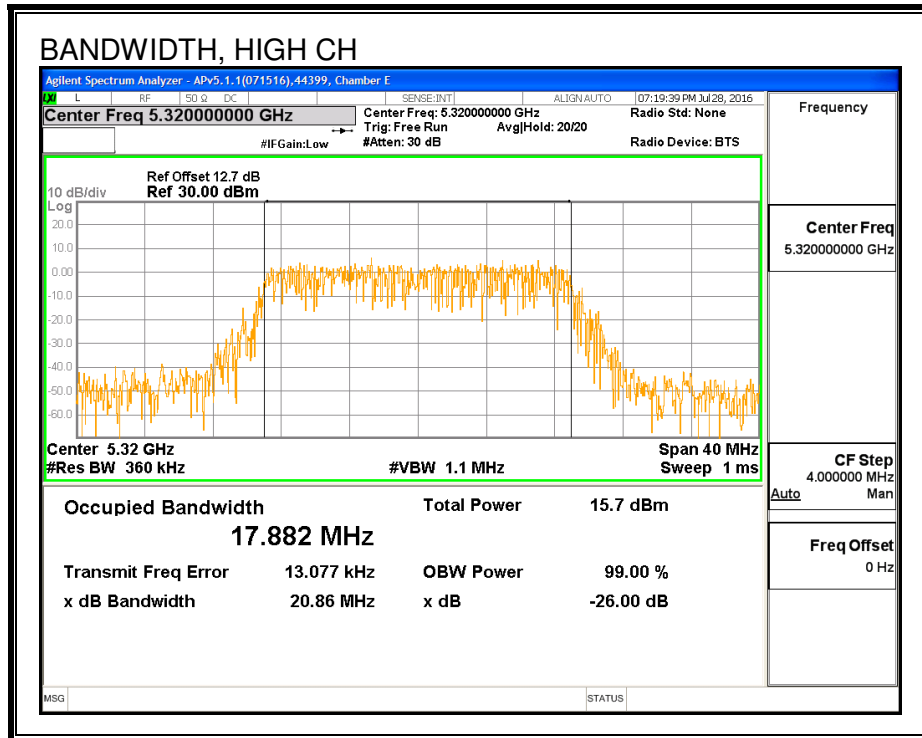

### 8.17.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	12.45
Mid	5300	12.39
High	5320	12.43

## 8.17.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.



**RESULTS**

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.30	17.78	7.60	21.90	9.40
Mid	5300	22.30	17.88	7.60	21.92	9.40
High	5320	22.41	17.88	7.60	21.92	9.40

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	12.45	12.45	21.90	-9.45
Mid	5300	12.39	12.39	21.92	-9.53
High	5320	12.43	12.43	21.92	-9.49

**PSD Results**

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.85	4.85	9.40	-4.55
Mid	5300	4.90	4.90	9.40	-4.50
High	5320	3.78	3.78	9.40	-5.62

**PSD**

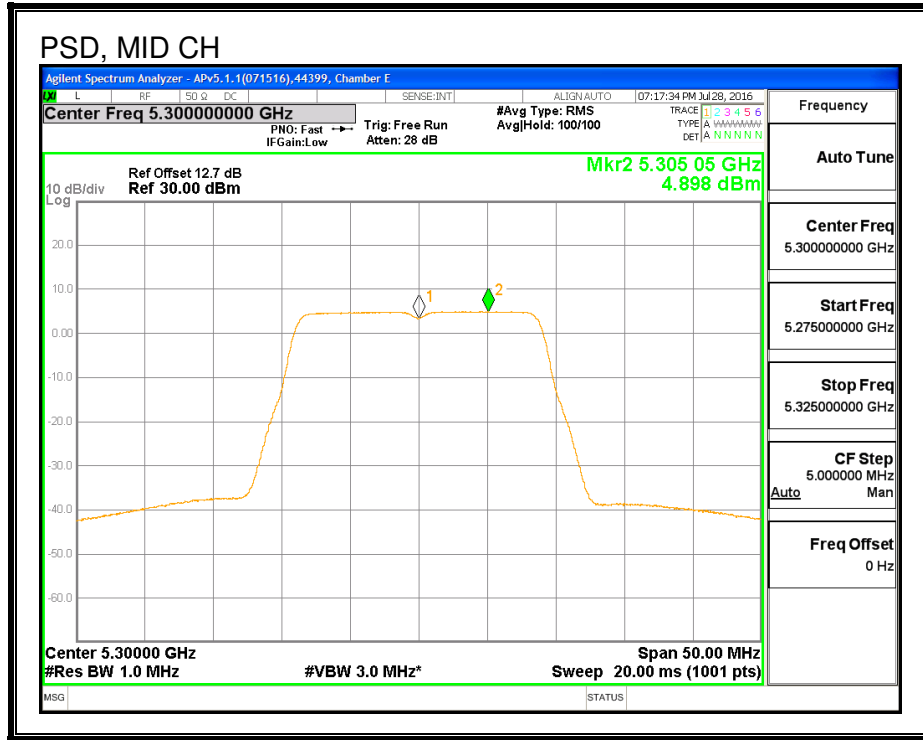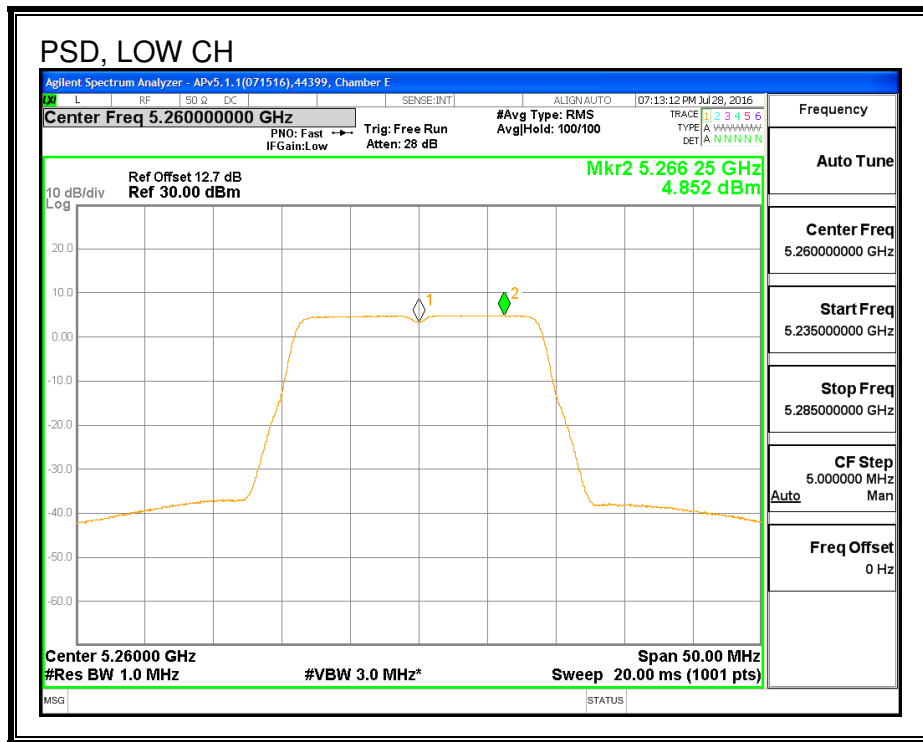

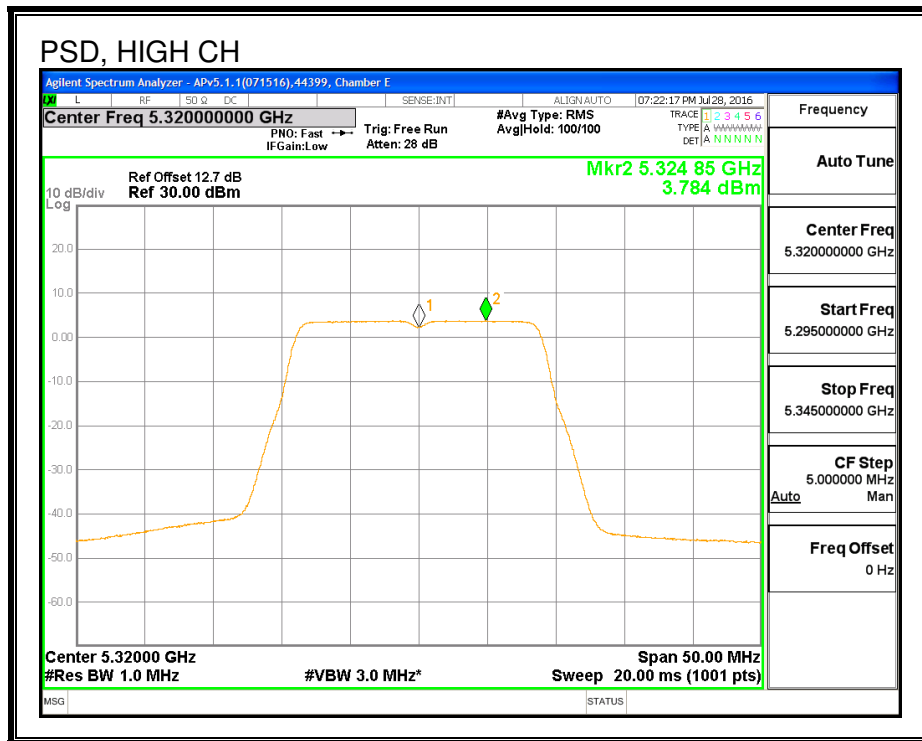

## 8.18. 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND

### 8.18.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5260	22.304	22.168
Mid	5300	22.304	22.304
High	5320	22.304	22.270



**26 DB BANDWIDTH, CHAIN 0**

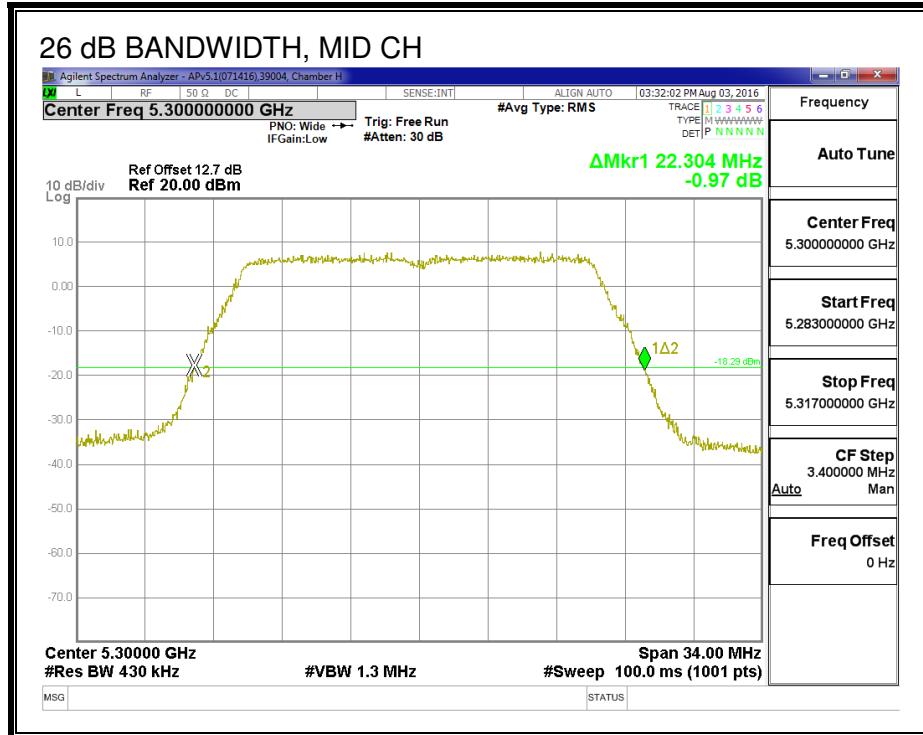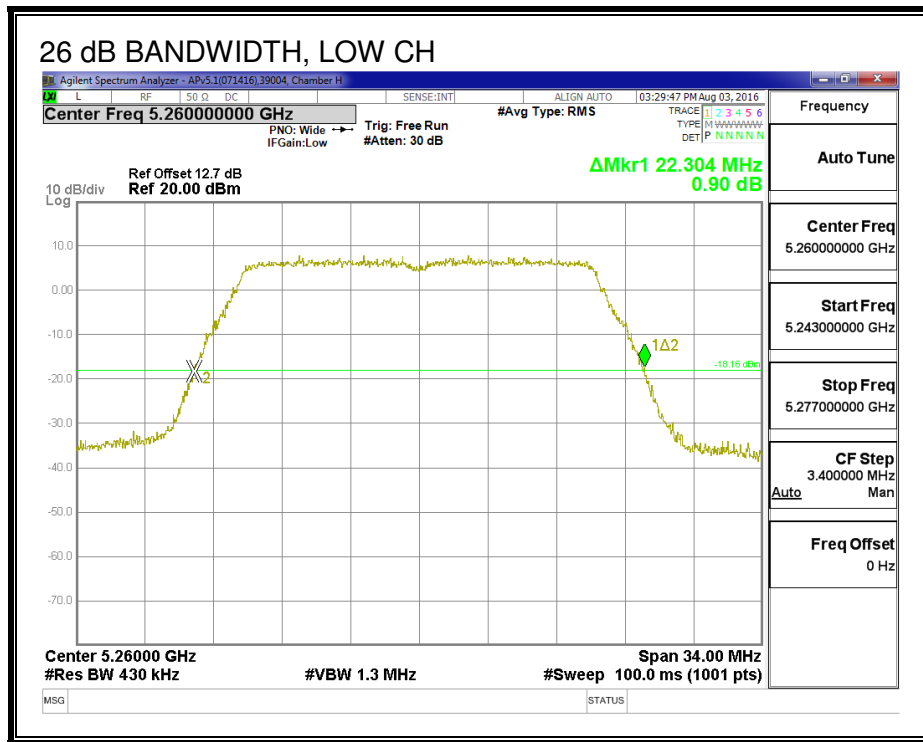

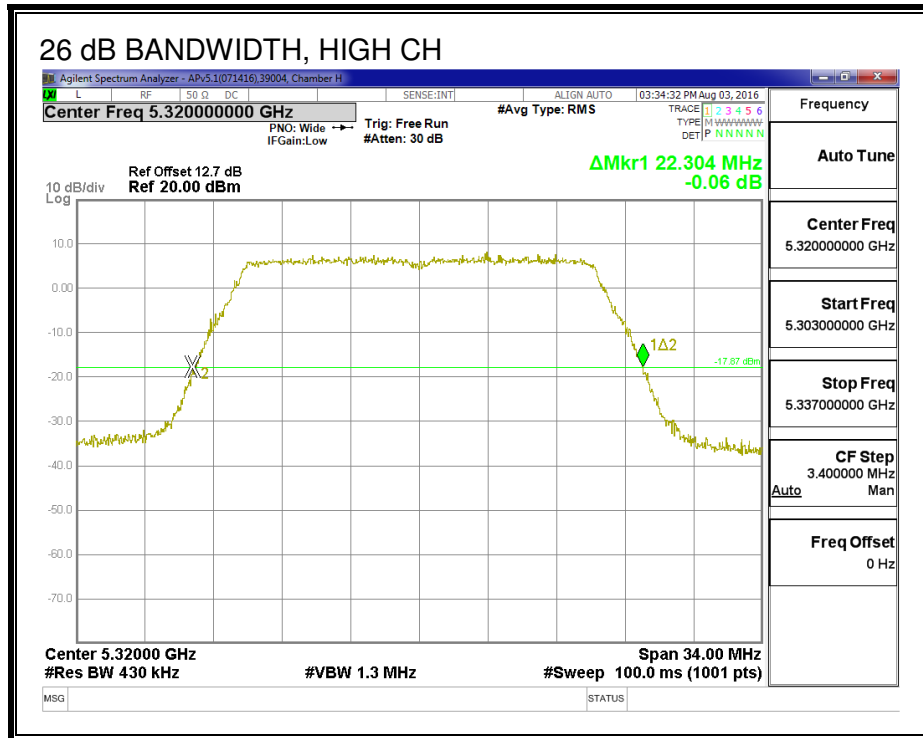

**26 DB BANDWIDTH, CHAIN 1**

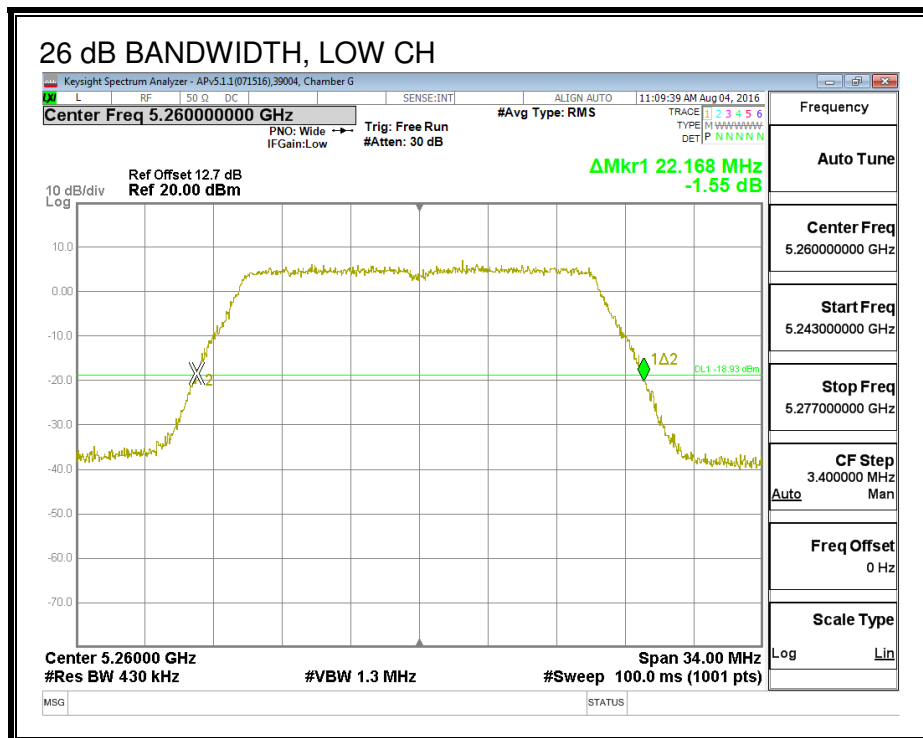

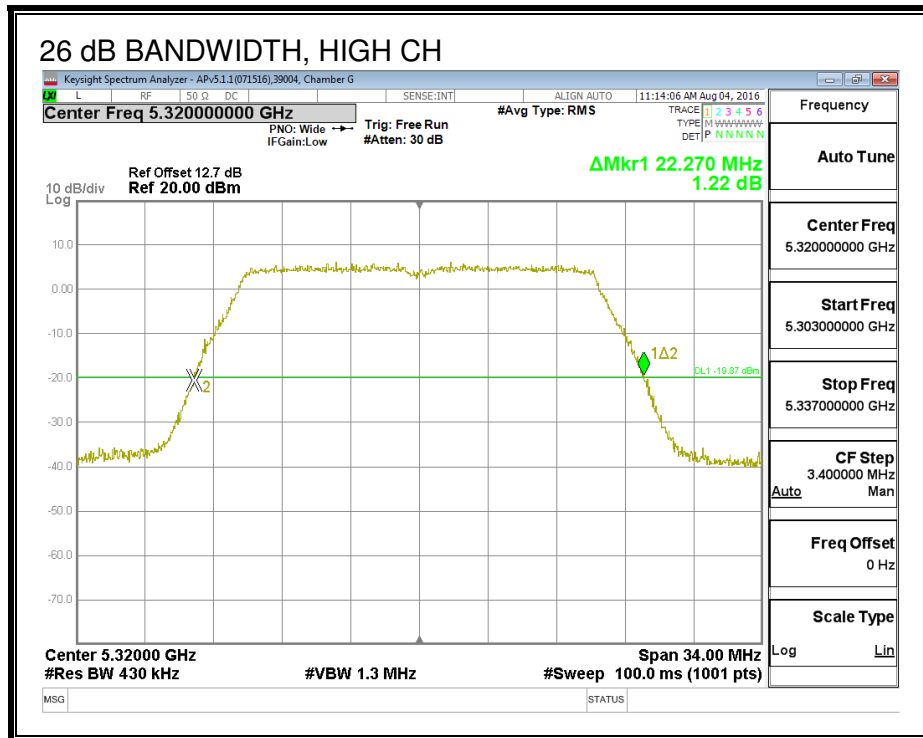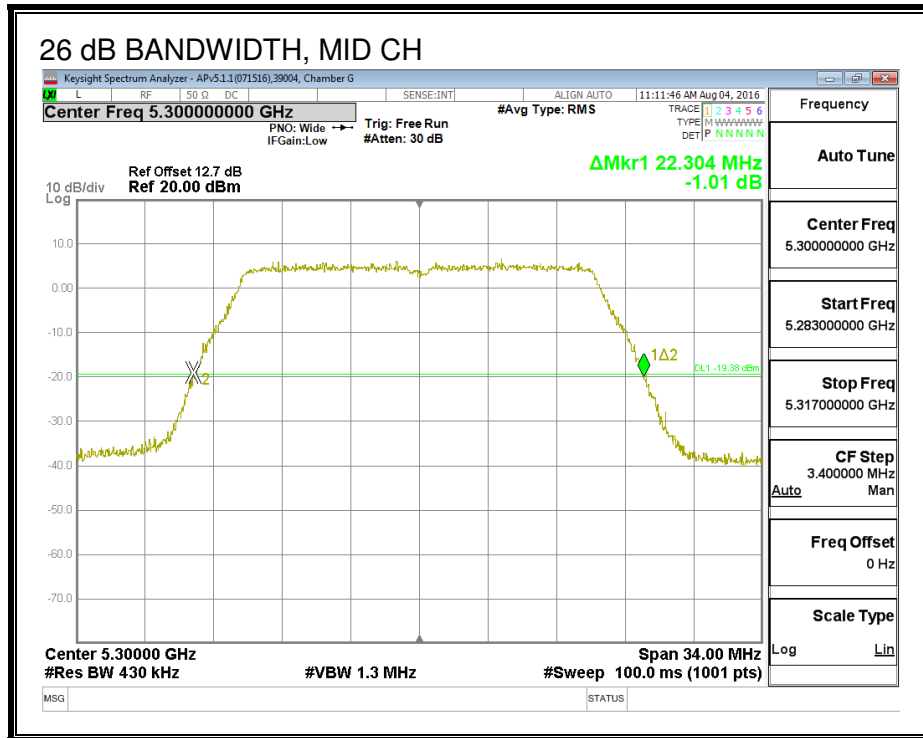

### 8.18.2. 99% BANDWIDTH

#### LIMITS



None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5260	17.835	17.780
Mid	5300	17.852	17.981
High	5320	17.920	17.966






**99% BANDWIDTH, CHAIN 0**

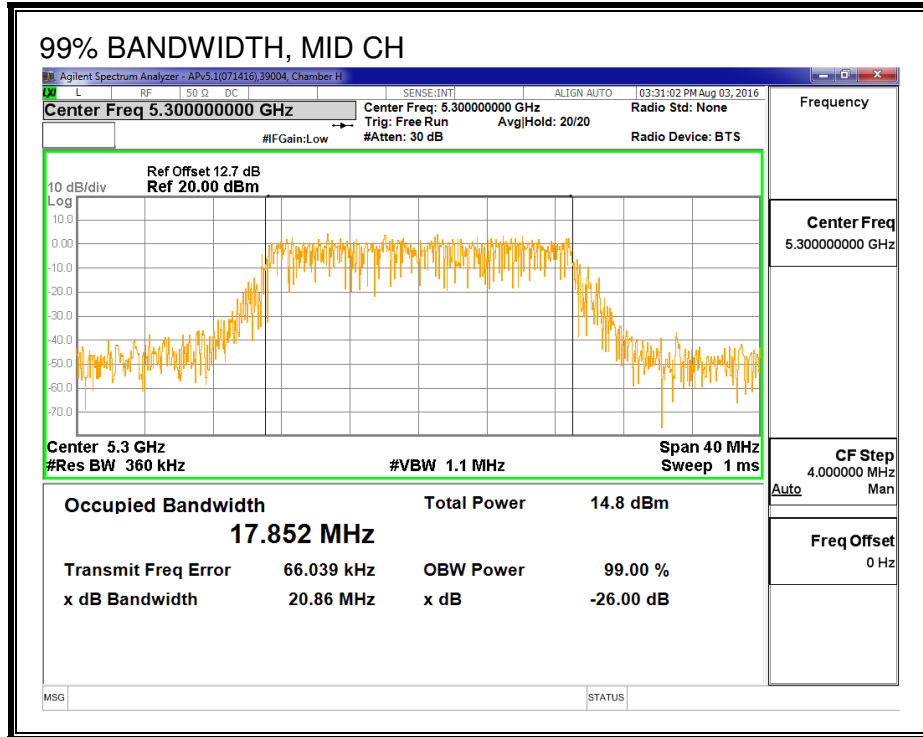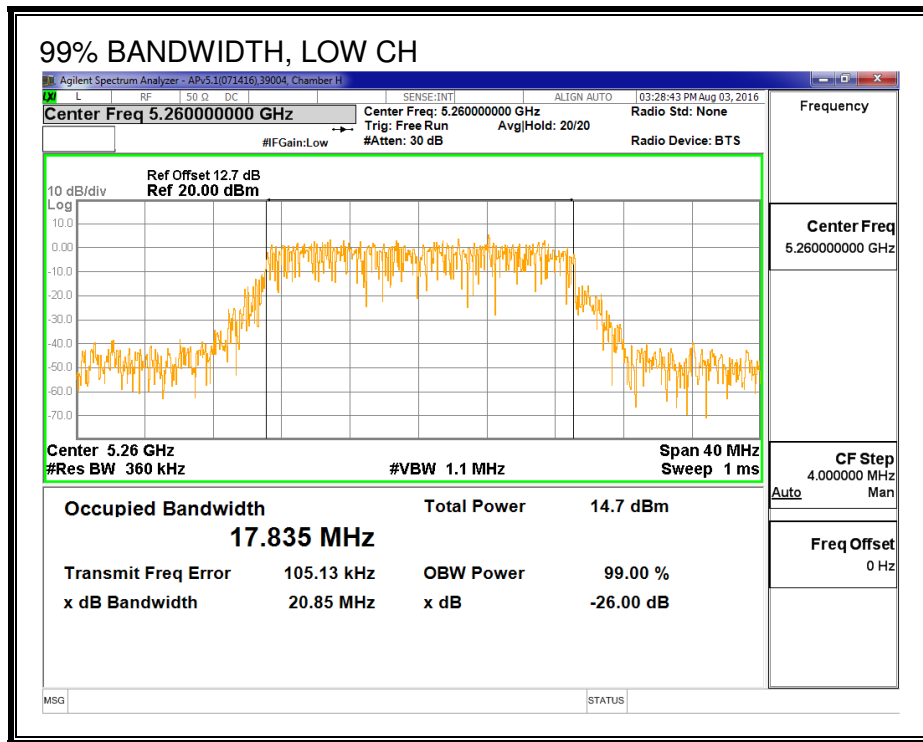

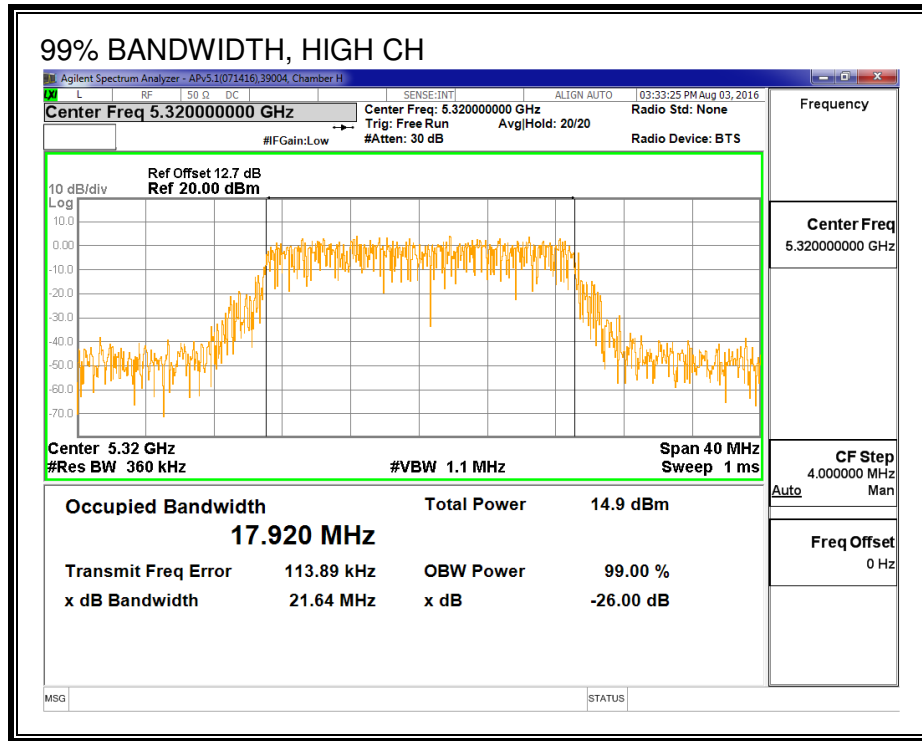

**99% BANDWIDTH, CHAIN 1**

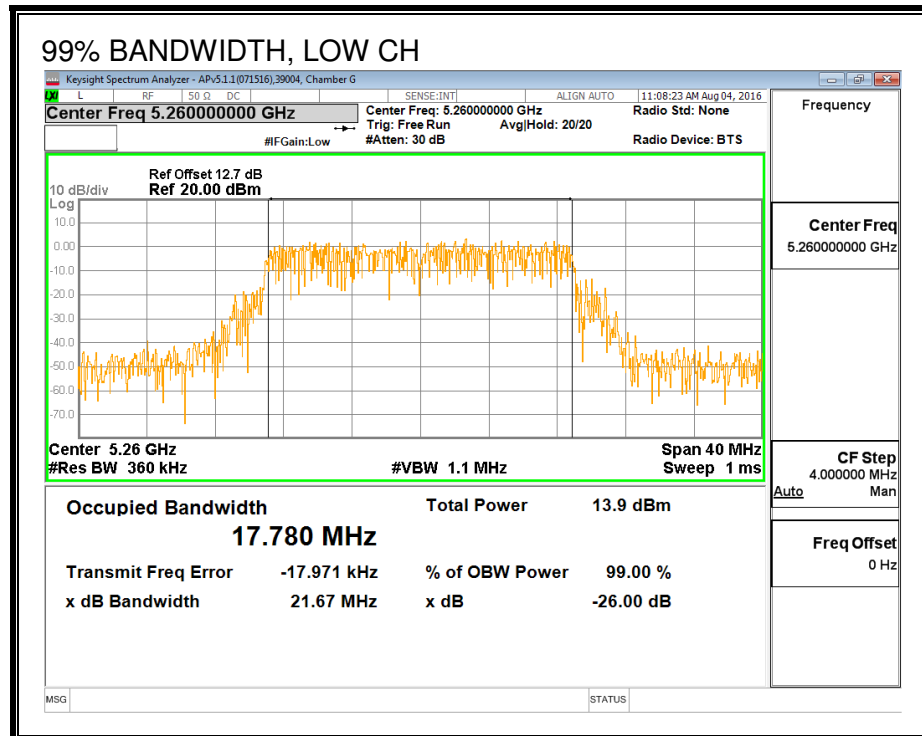

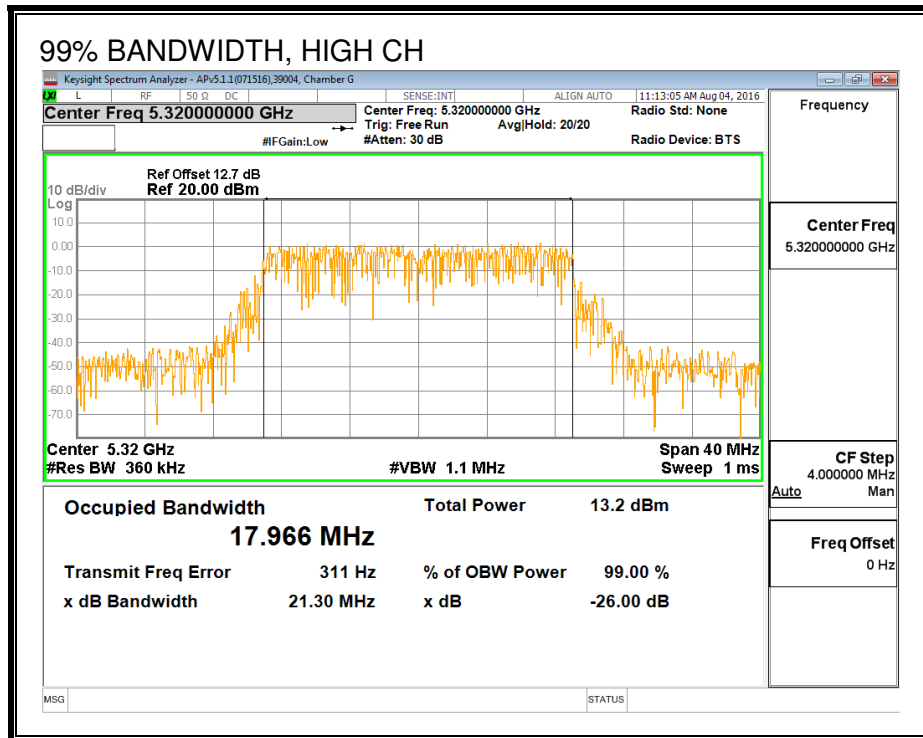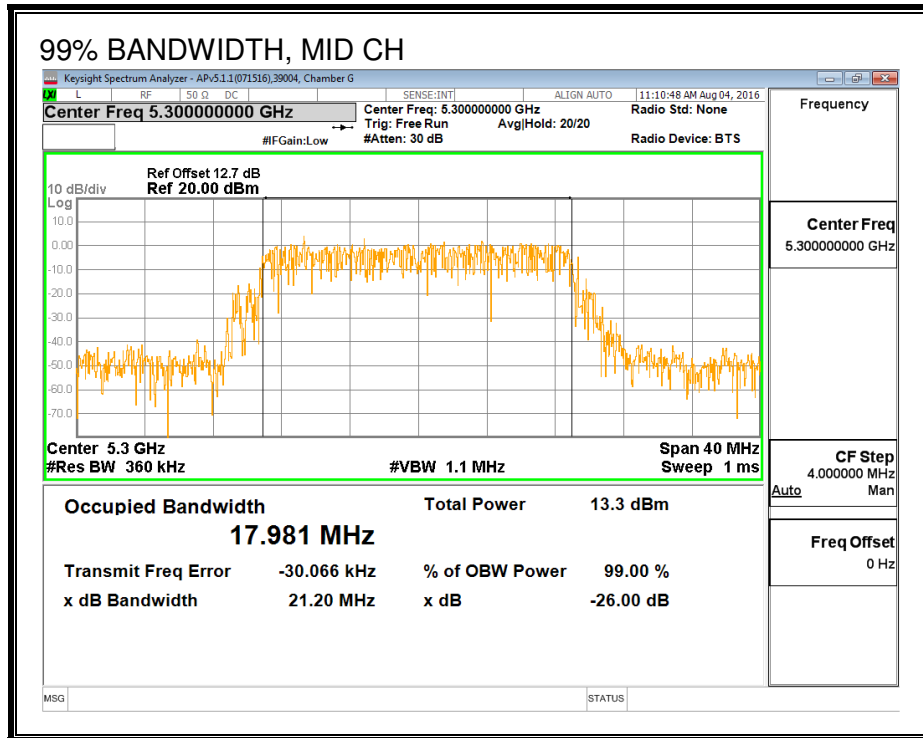

### 8.18.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39004	<b>Date:</b>	9/2/16
------------	-------	--------------	--------

#### Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5260	11.29	11.47	14.39
Mid	5300	11.46	11.28	14.38
High	5320	11.35	11.40	14.39