

## 8.9.4. OUTPUT POWER AND PSD

### LIMITS

#### FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	1.27	1.27	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.19	Included in Calculations of Corr'd PSD
---------------------------	------	--


### Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	13.98	13.98	24.00	-10.02

### PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-0.286	-0.10	11.00	-11.10

PSD

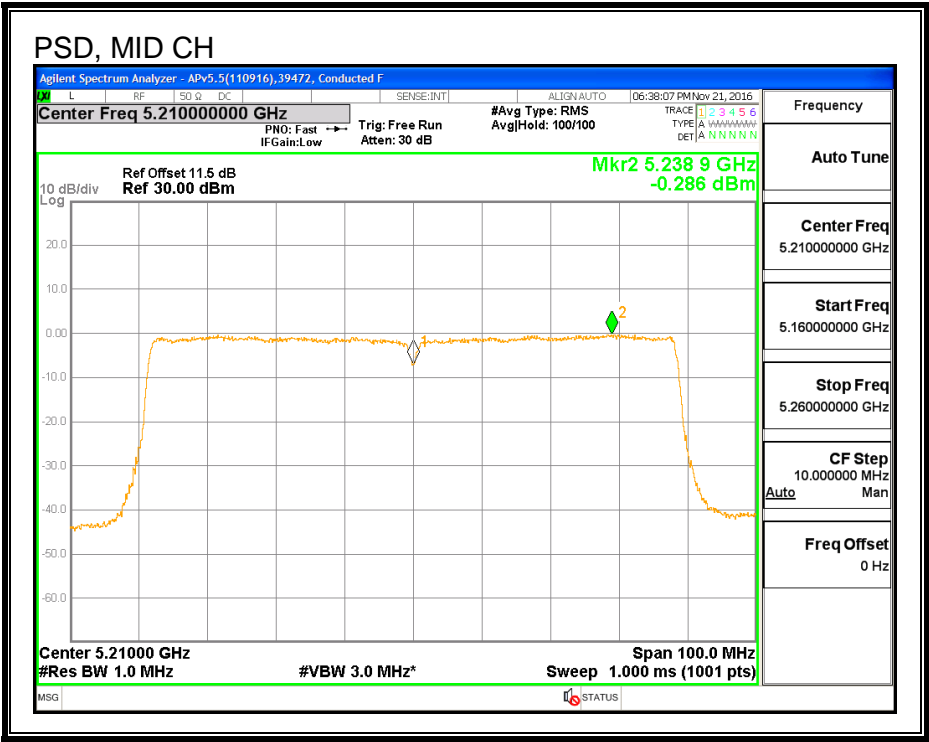

8.10. 802.11ac VHT80 ANTENNA B MODE IN THE 5.2 GHz BAND

8.10.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.400

26 dB BANDWIDTH

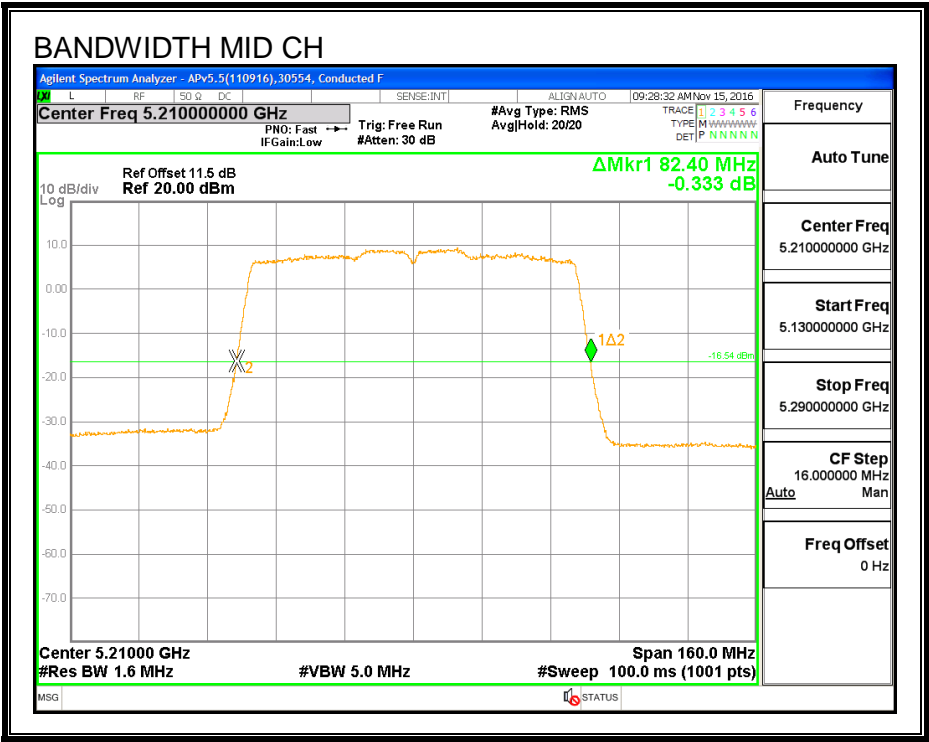



### 8.10.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	13.80

#### **8.10.4. OUTPUT POWER AND PSD**

##### **LIMITS**

##### **FCC §15.407 (a) (1)**

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	2.64	2.64	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.19	Included in Calculations of Corr'd PSD
---------------------------	------	--


### Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	13.80	13.80	24.00	-10.20

### PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-0.235	-0.05	11.00	-11.05

PSD

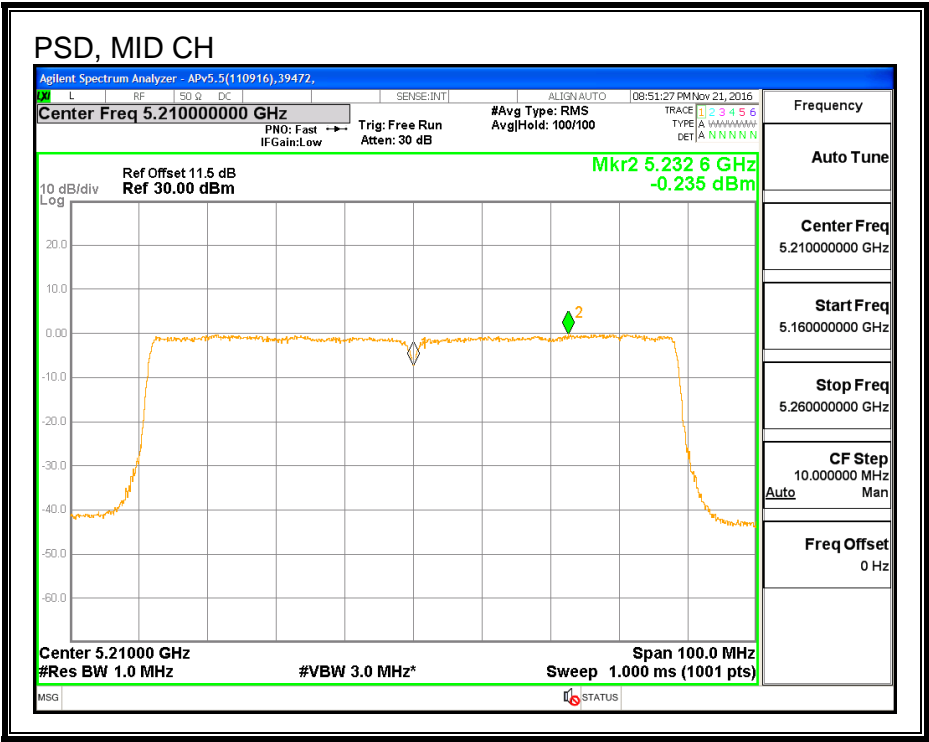

## **8.11. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND**

### **8.11.1. 26 dB BANDWIDTH**


#### **LIMITS**

None; for reporting purposes only.


#### **RESULTS**

Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Mid	5210	82.400	82.400

26 DB BANDWIDTH, ANTENNA A

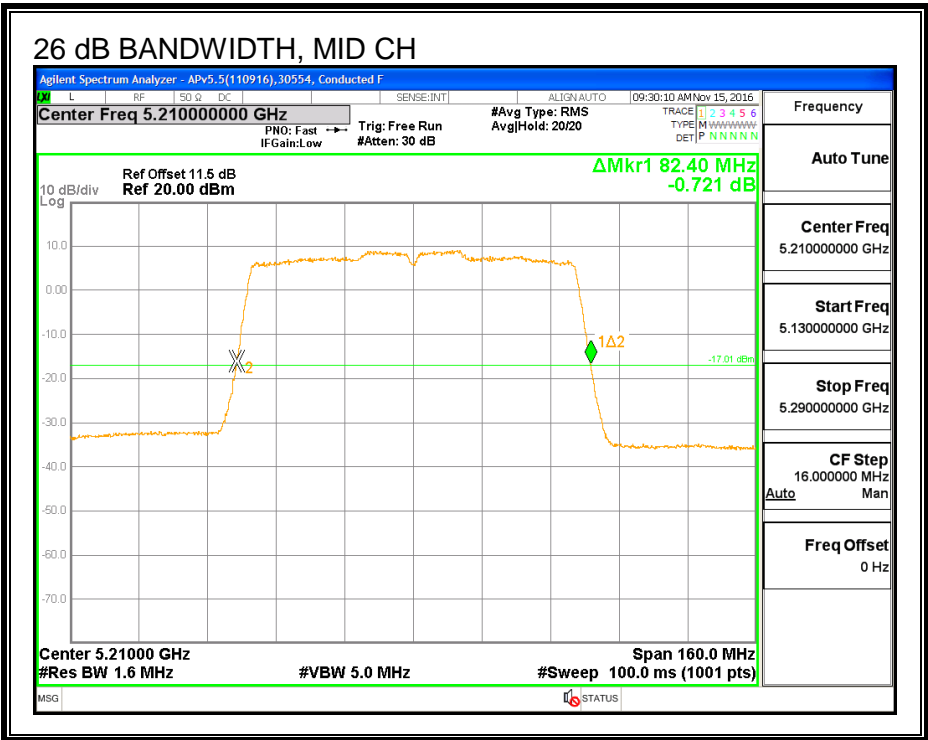

26 DB BANDWIDTH, ANTENNA B

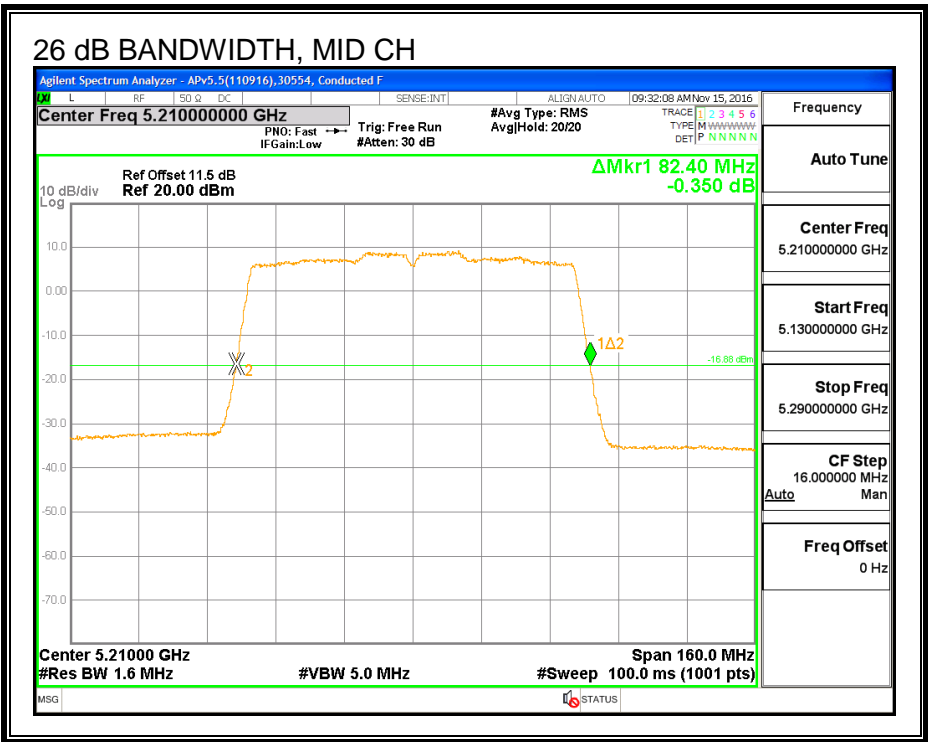

### 8.11.2. 99% BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Mid	5210	75.904	75.775

99% BANDWIDTH, ANTENNA A

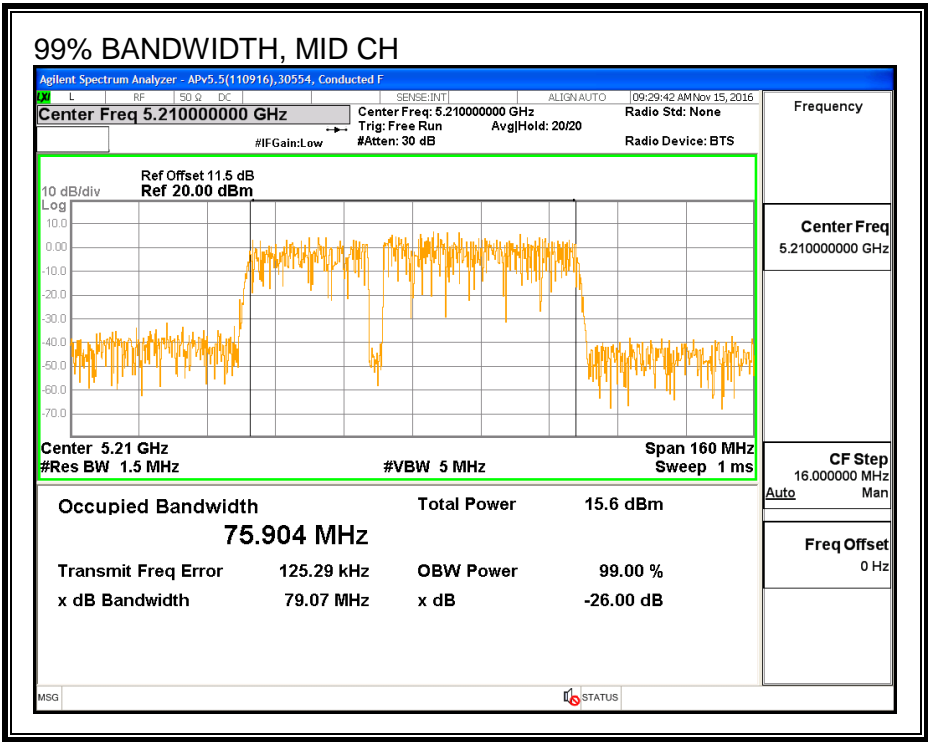

99% BANDWIDTH, ANTENNA B

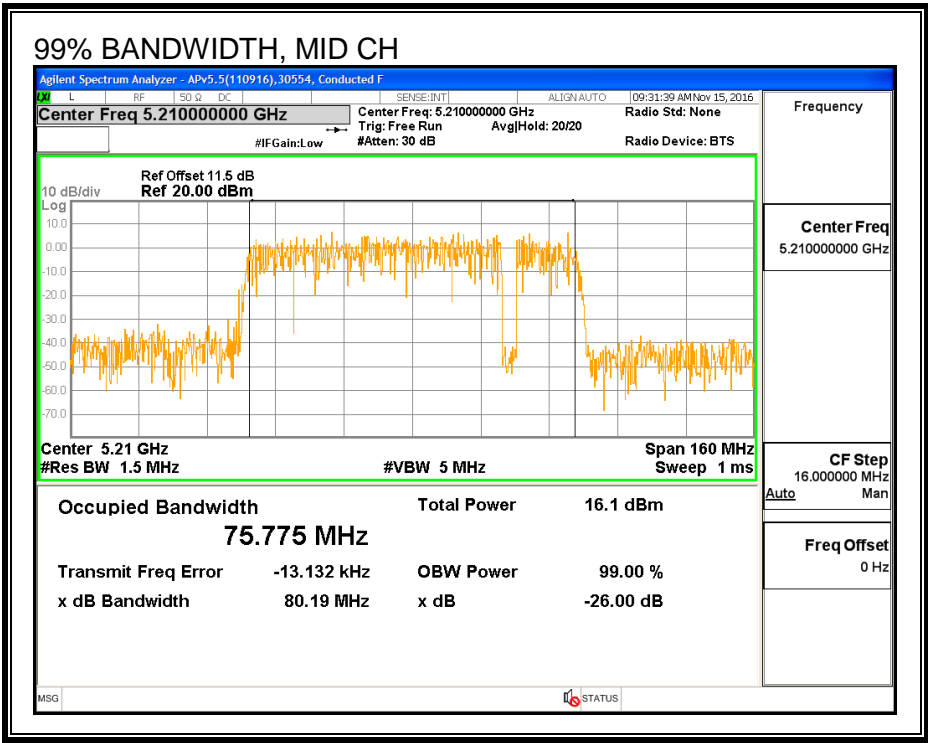

### 8.11.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Antenna A Power (dBm)</b>	<b>Antenna B Power (dBm)</b>	<b>Total Power (dBm)</b>
Mid	5210	12.61	12.80	15.72

#### 8.11.4. OUTPUT POWER AND PSD

##### LIMITS

##### FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### **DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna A Gain  (dBi)</b>	<b>Antenna B Gain  (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
1.27	2.64	2.01

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Antenna A Gain  (dBi)</b>	<b>Antenna B Gain  (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
1.27	2.64	4.99

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	2.01	4.99	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.20	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


### Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	12.61	12.80	15.72	24.00	-8.28


### PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-0.41	-0.30	2.86	11.00	-8.14

PSD, ANTENNA A

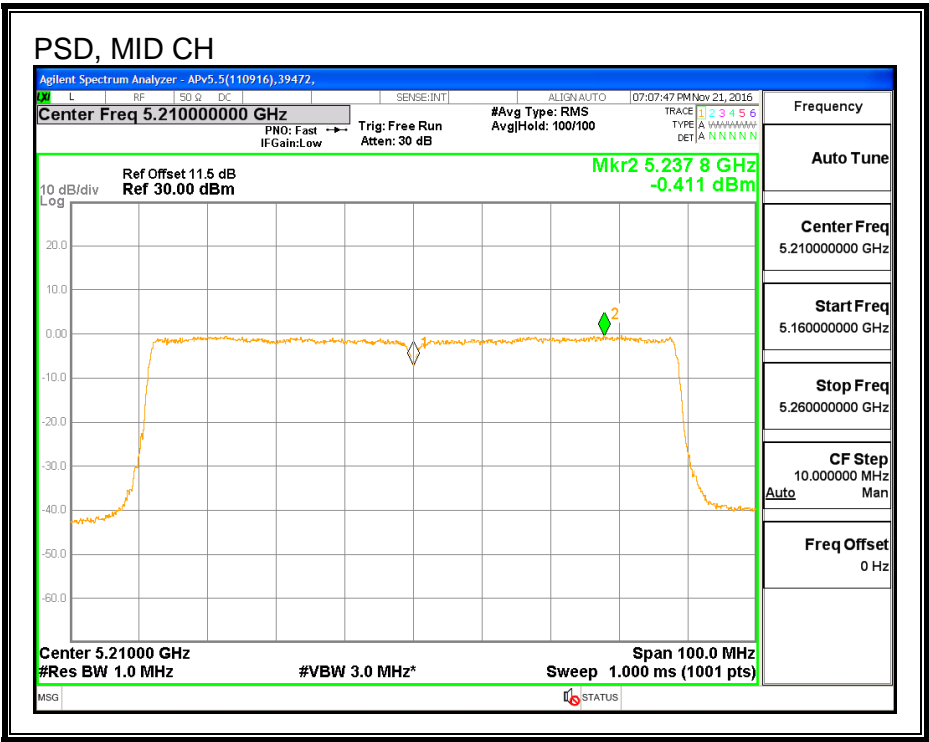

PSD, ANTENNA B

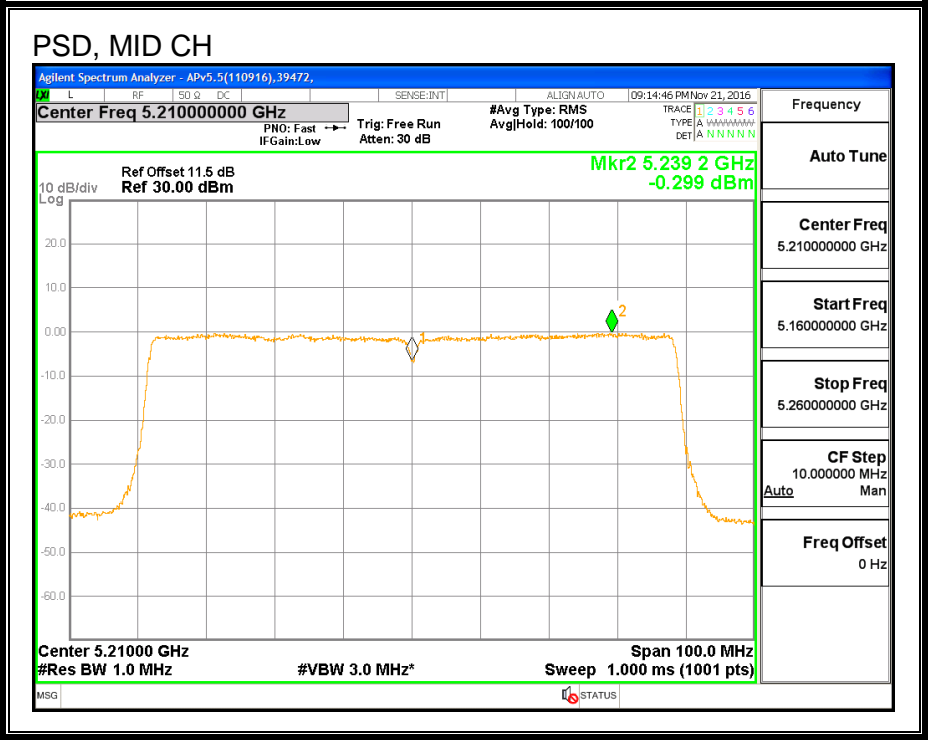

---

**8.12. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN  
THE 5.2 GHz BAND**

**Noted:** Covered by 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

## 8.13. 802.11n HT20 ANTENNA A MODE IN THE 5.3 GHz BAND

### 8.13.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	21.840
Mid	5300	22.000
High	5320	21.840

26 dB BANDWIDTH

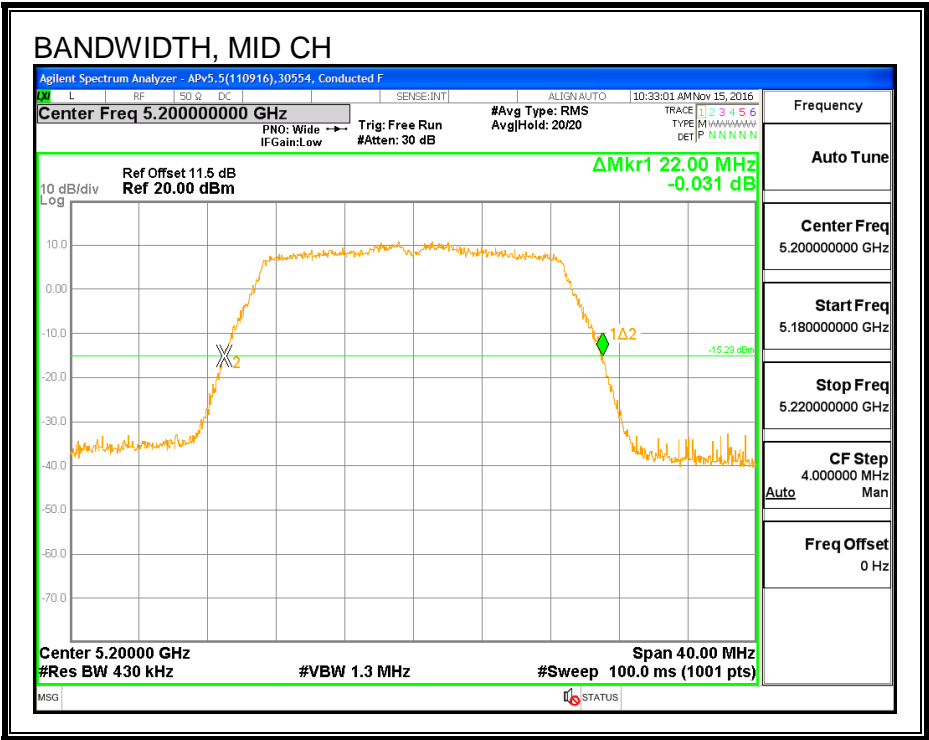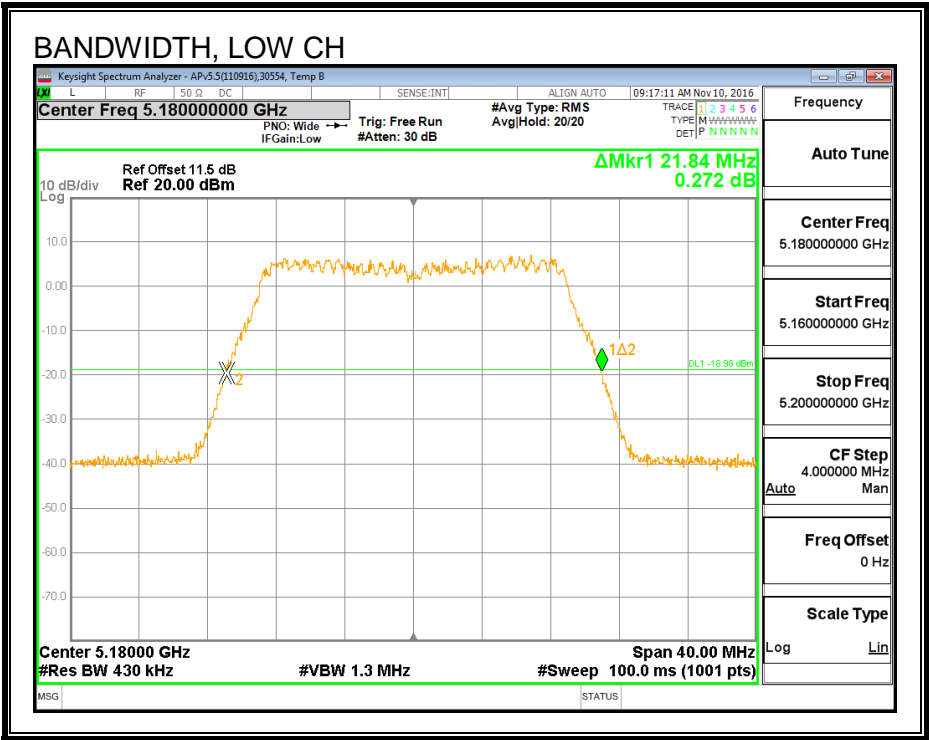

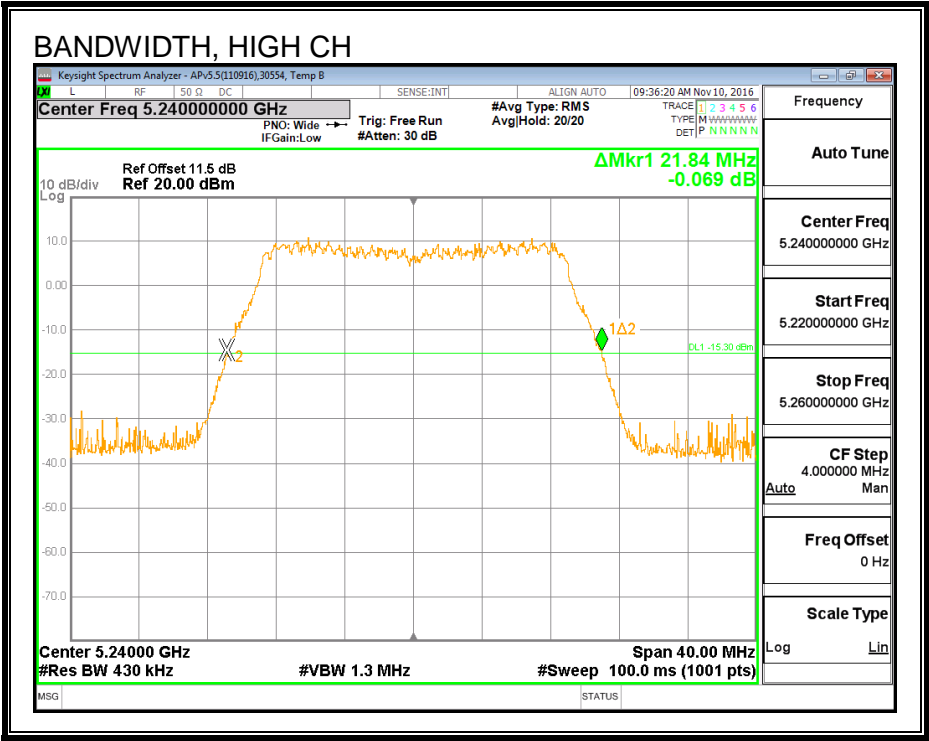

### 8.13.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	18.045
Mid	5300	17.677
High	5320	17.842

99% BANDWIDTH

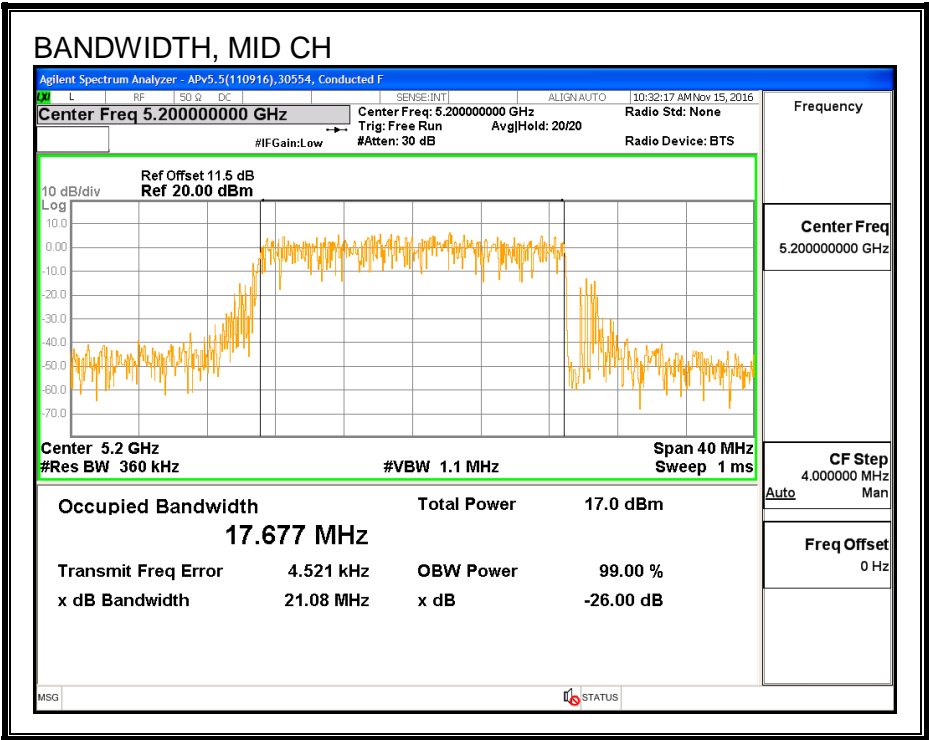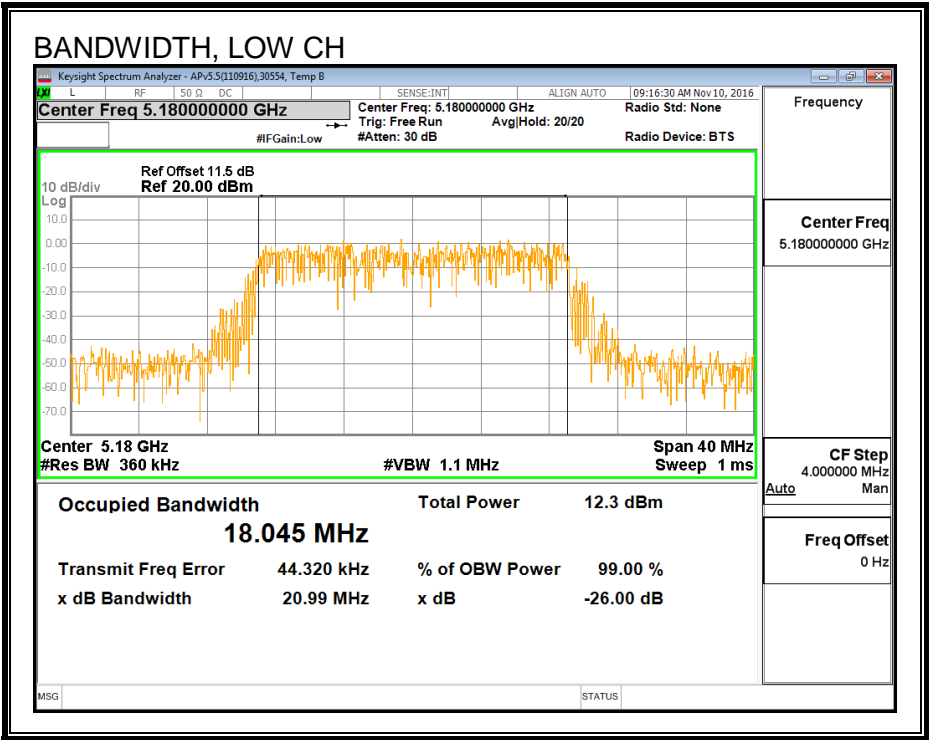

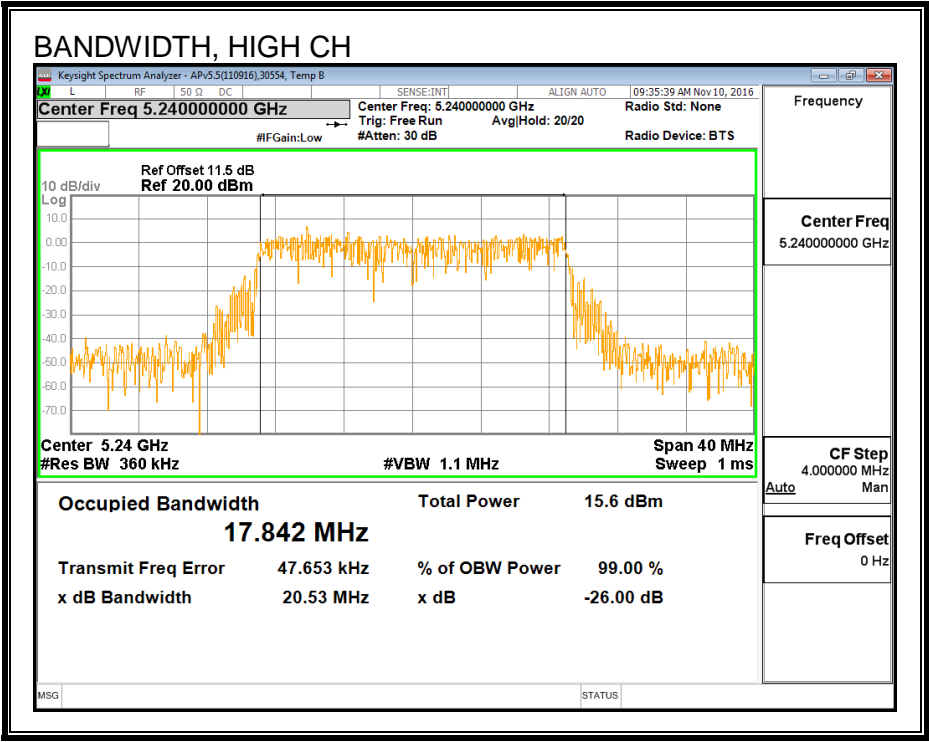

### 8.13.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	16.93
Mid	5300	16.81
High	5320	15.84

#### **8.13.4. OUTPUT POWER AND PSD**

##### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.840	18.045	2.24	23.56	11.00
Mid	5300	22.000	17.677	2.24	23.47	11.00
High	5320	21.840	17.842	2.24	23.51	11.00

<b>Duty Cycle CF (dB)</b>	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--



### Output Power Results


Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.93	16.93	23.56	-6.63
Mid	5300	16.81	16.81	23.47	-6.66
High	5320	15.84	15.84	23.51	-7.67

### PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.947	5.95	11.00	-5.05
Mid	5300	6.046	6.05	11.00	-4.95
High	5320	5.973	5.97	11.00	-5.03

PSD

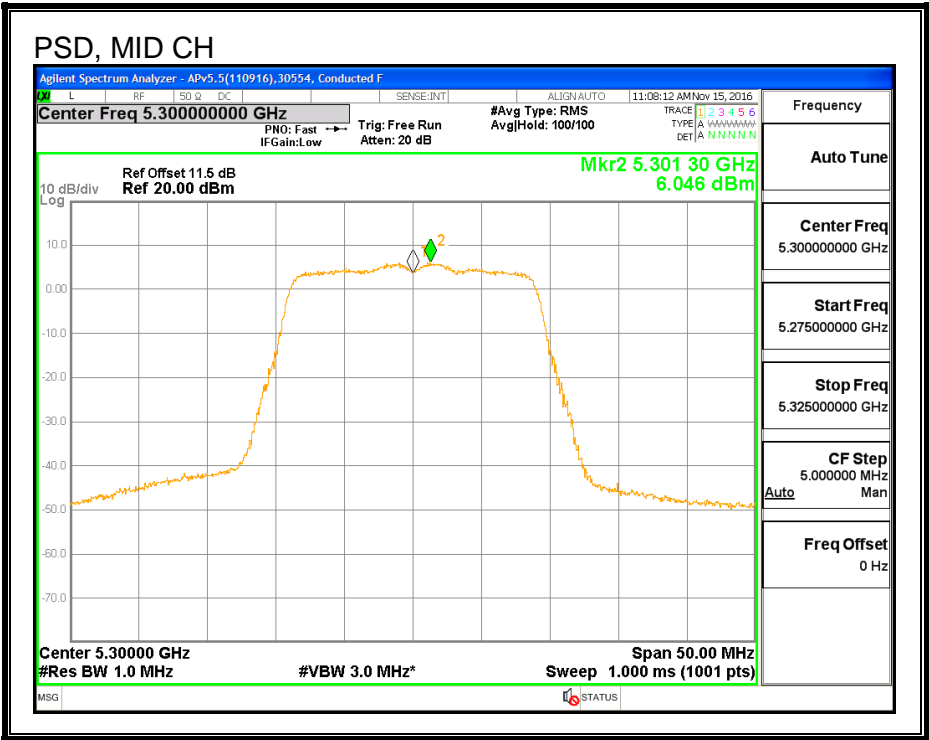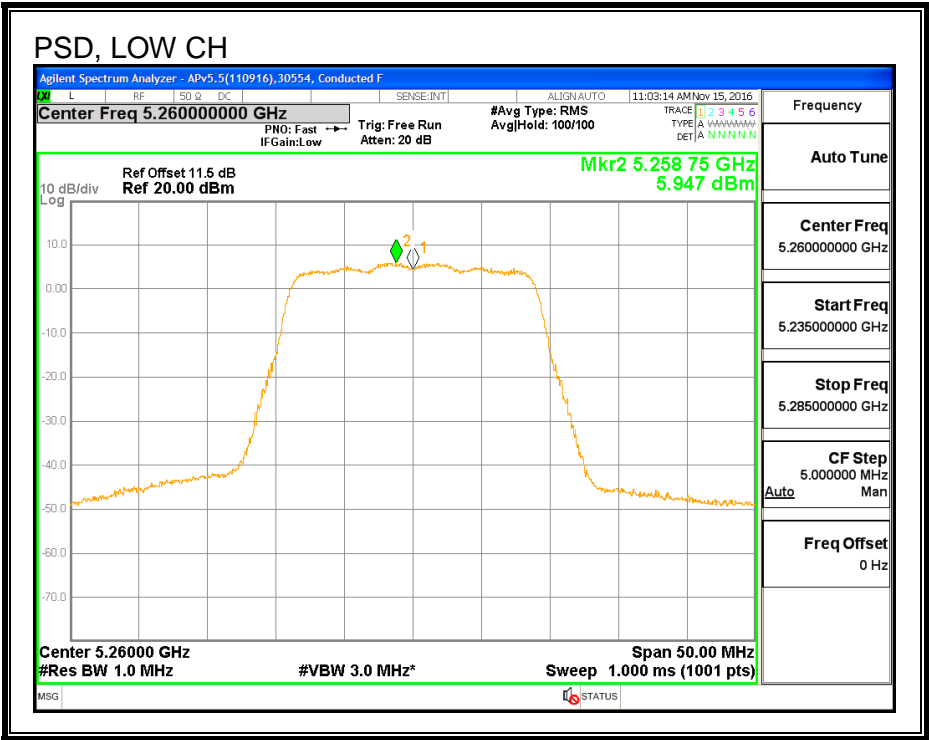

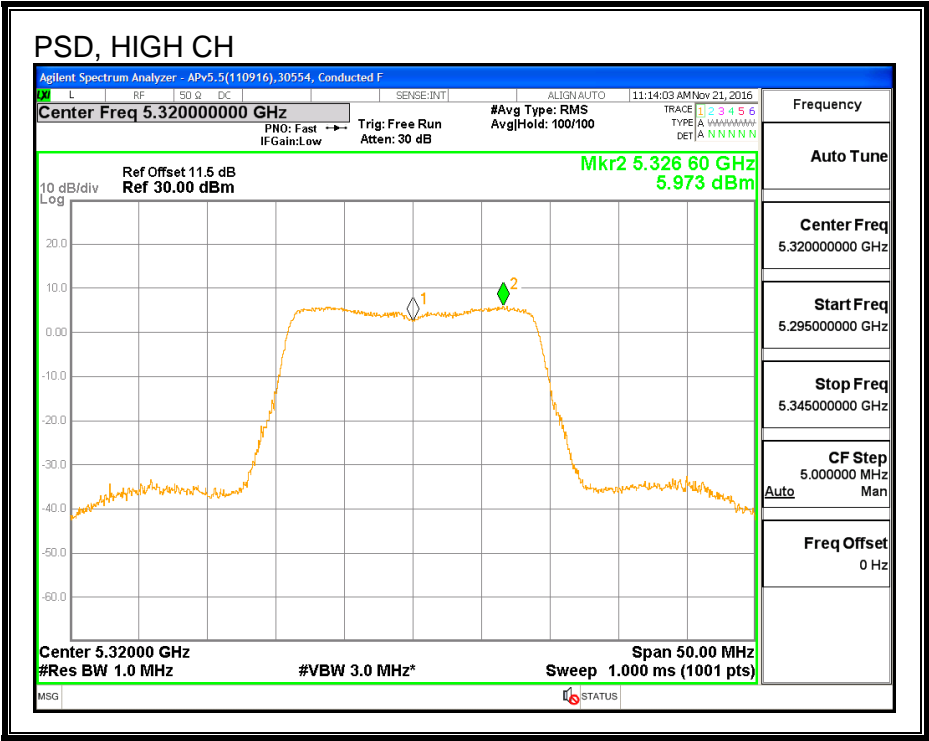

## 8.14. 802.11n HT20 ANTENNA B MODE IN THE 5.3 GHz BAND

### 8.14.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	21.800
Mid	5300	21.920
High	5320	21.840

26 dB BANDWIDTH

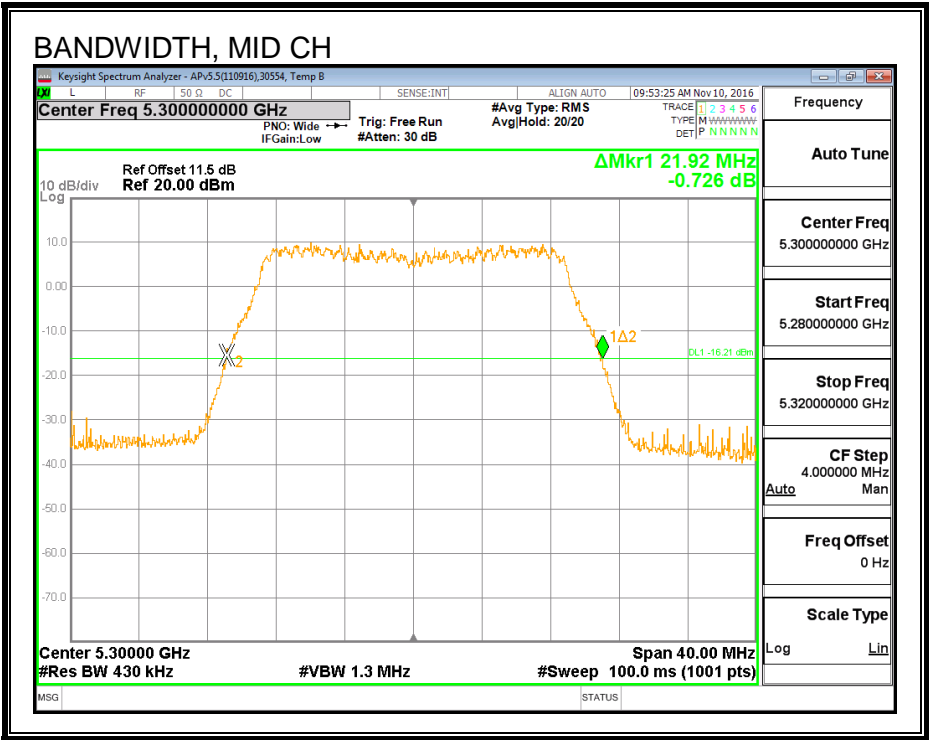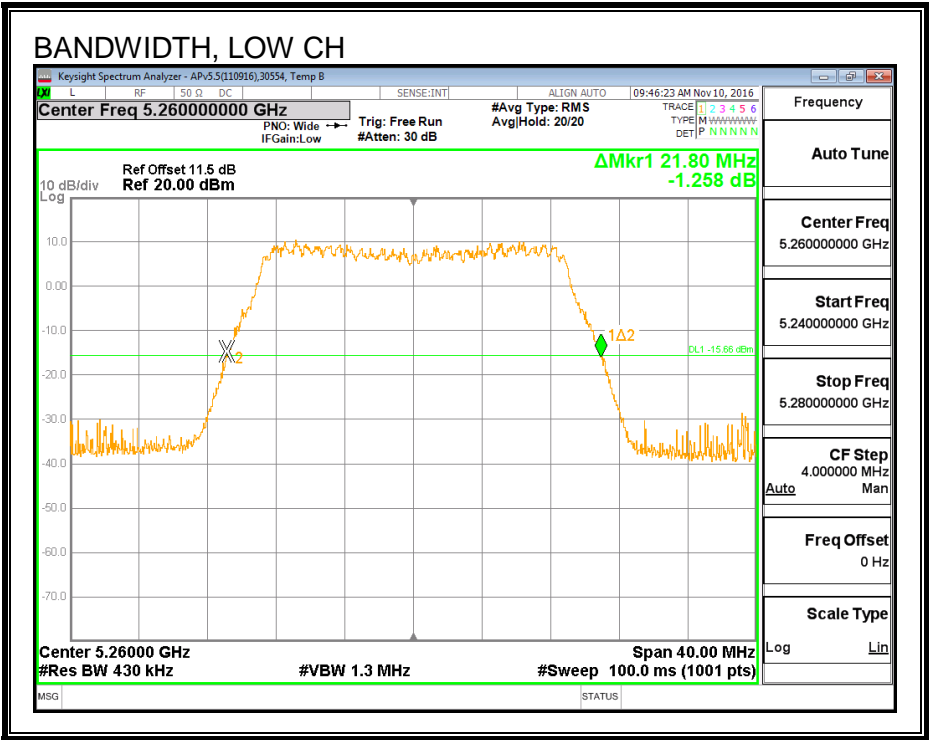

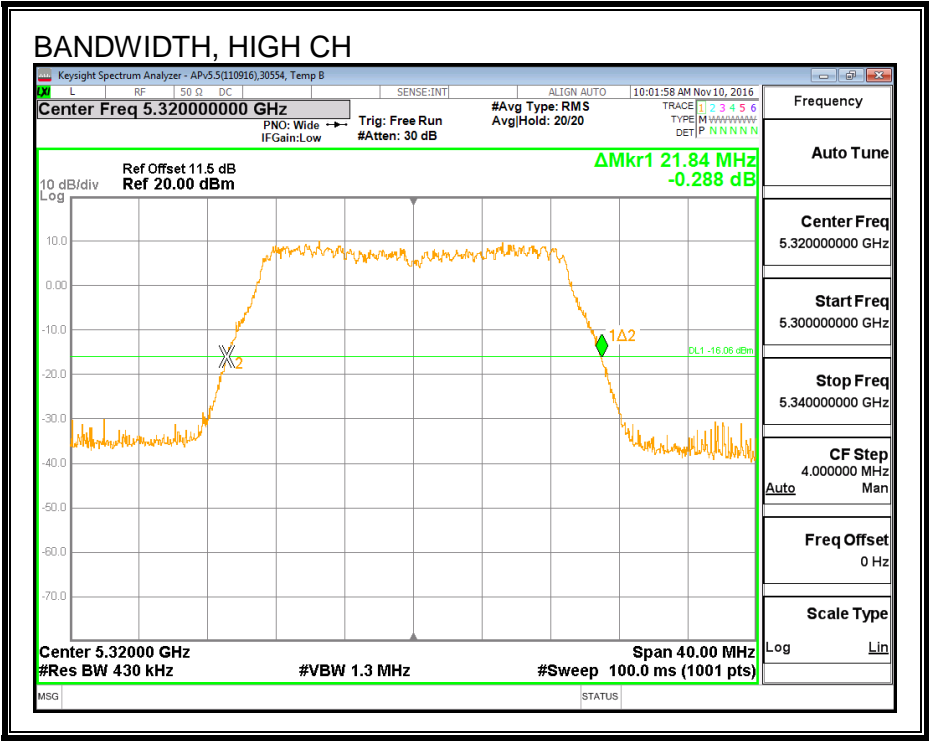

### 8.14.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.954
Mid	5300	17.796
High	5320	17.857

99% BANDWIDTH

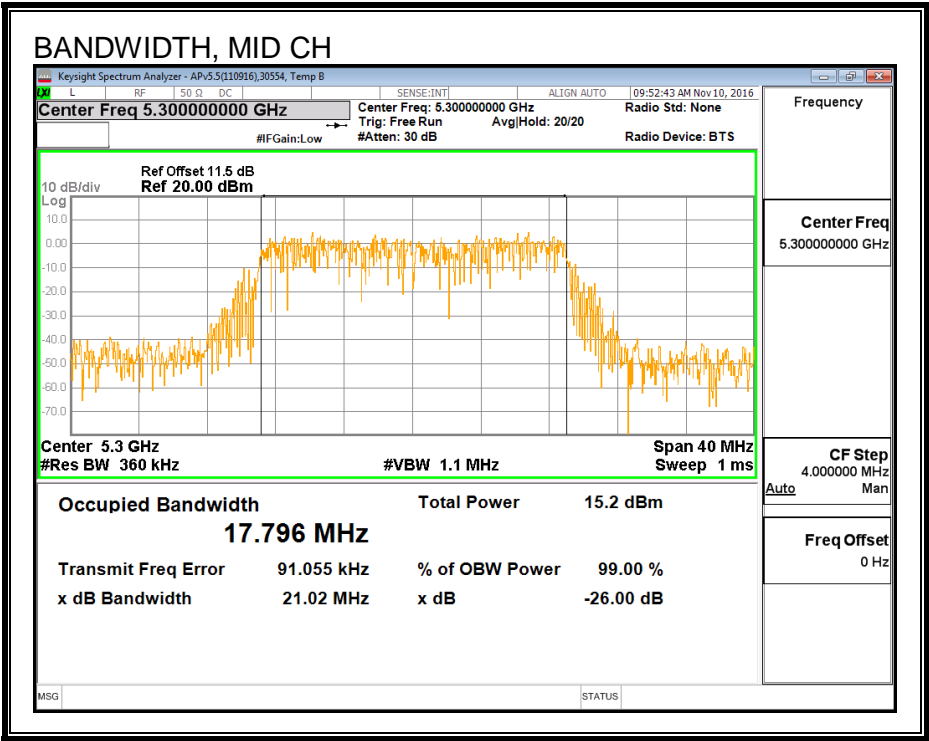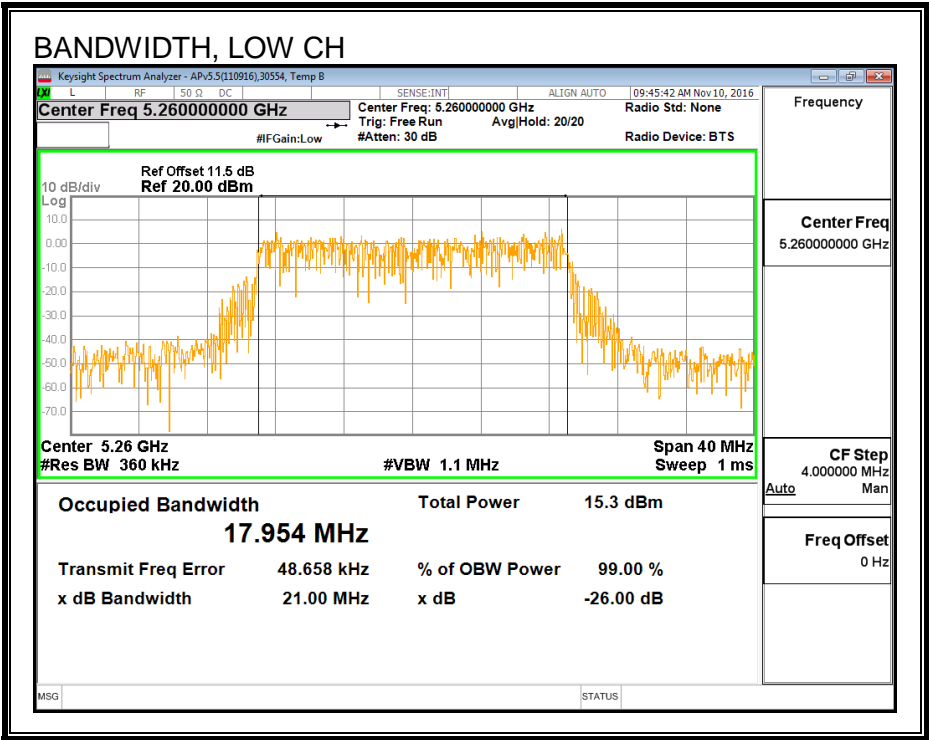

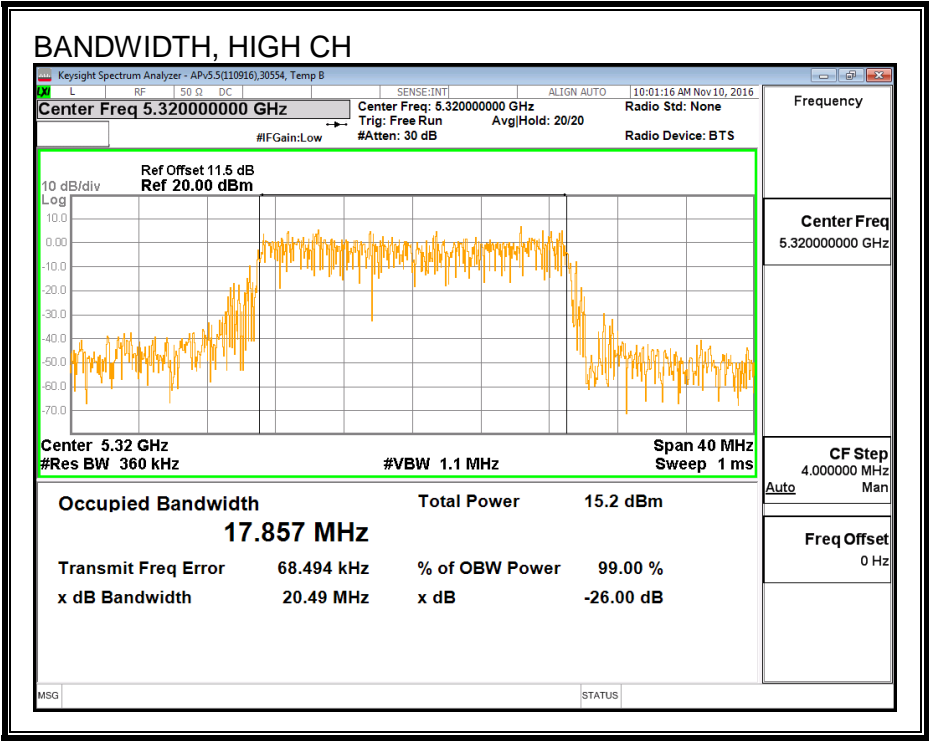

### 8.14.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5260	16.87
Mid	5300	16.88
High	5320	15.92

#### **8.14.4. OUTPUT POWER AND PSD**

##### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.800	17.954	2.77	23.54	11.00
Mid	5300	21.920	17.796	2.77	23.50	11.00
High	5320	21.840	17.857	2.77	23.52	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



### Output Power Results


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.87	16.87	23.54	-6.67
Mid	5300	16.88	16.88	23.50	-6.62
High	5320	15.92	15.92	23.52	-7.60

### PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.879	5.88	11.00	-5.12
Mid	5300	6.069	6.07	11.00	-4.93
High	5320	5.743	5.74	11.00	-5.26

PSD

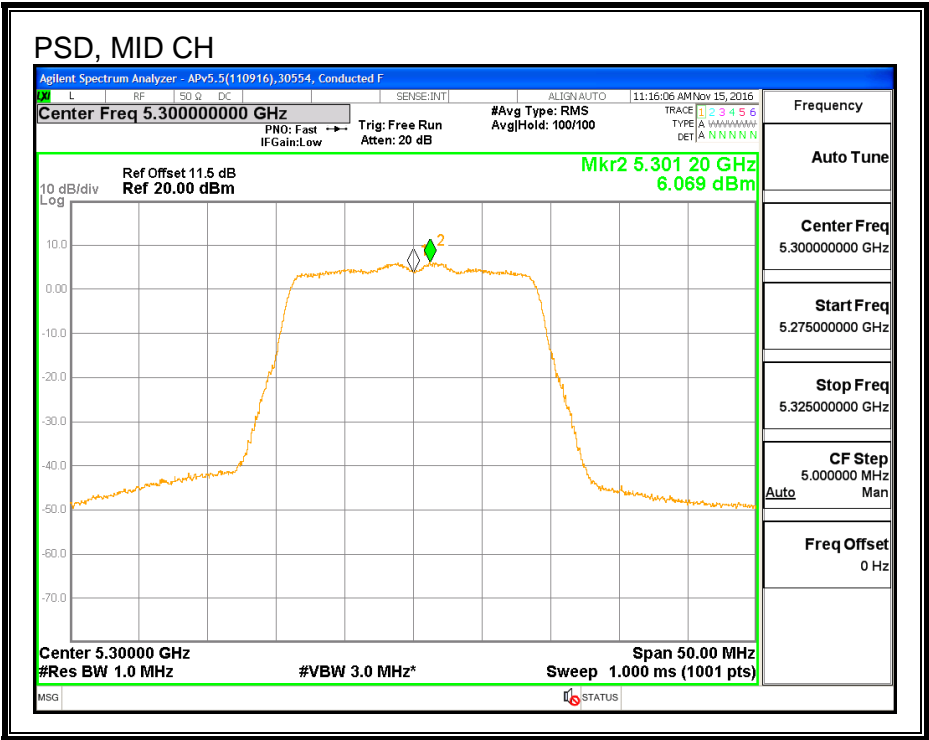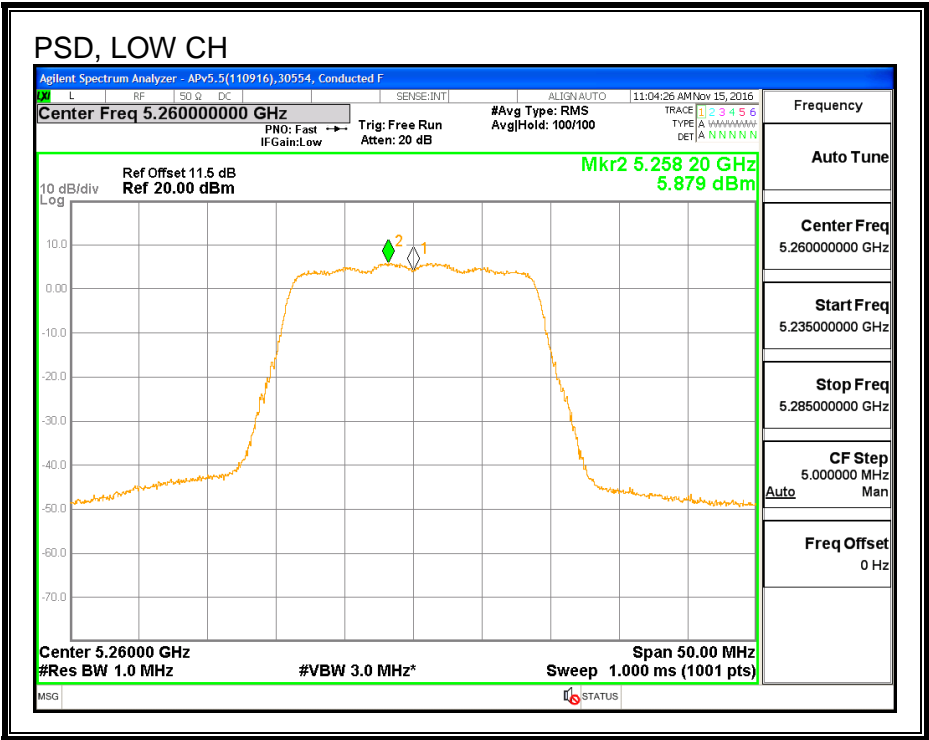

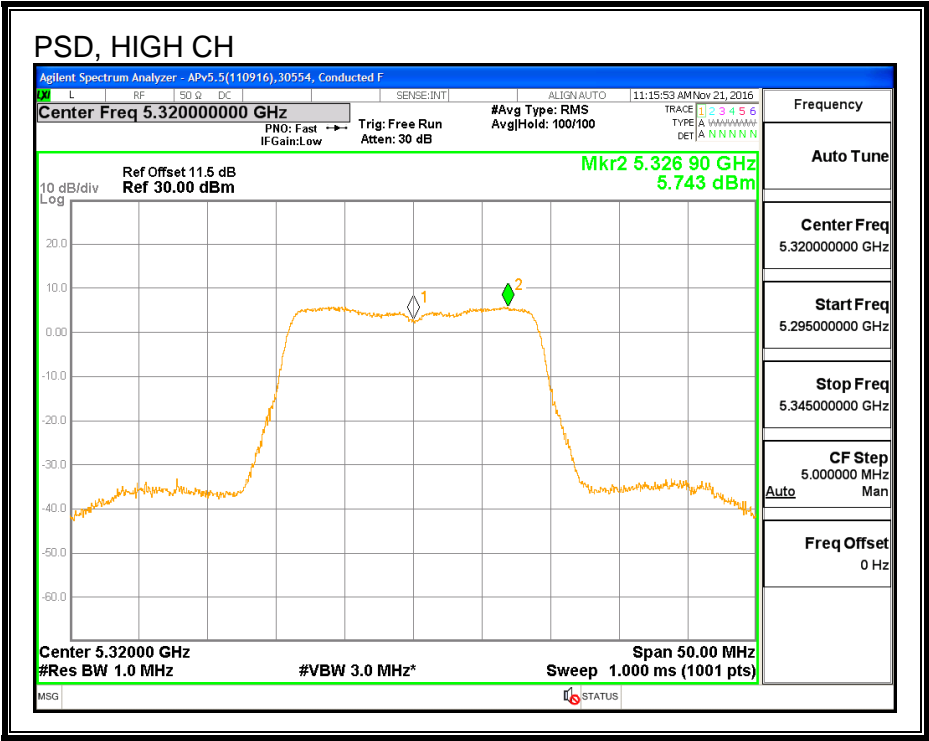

## 8.15. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND



### 8.15.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS



Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Low	5260	21.720	21.800
Mid	5300	21.760	21.880
High	5320	21.760	21.800

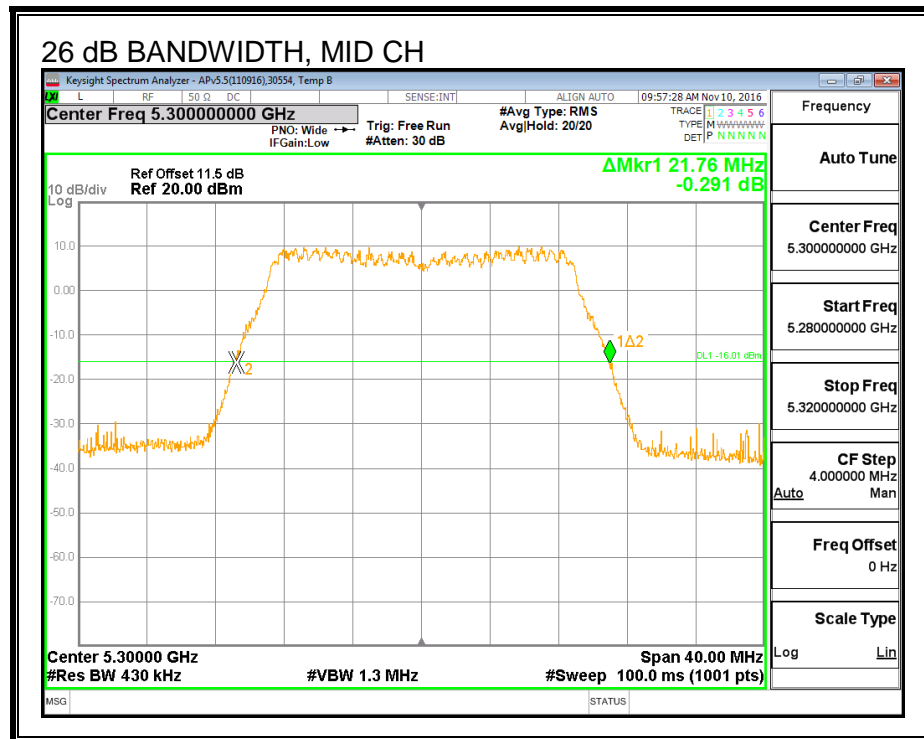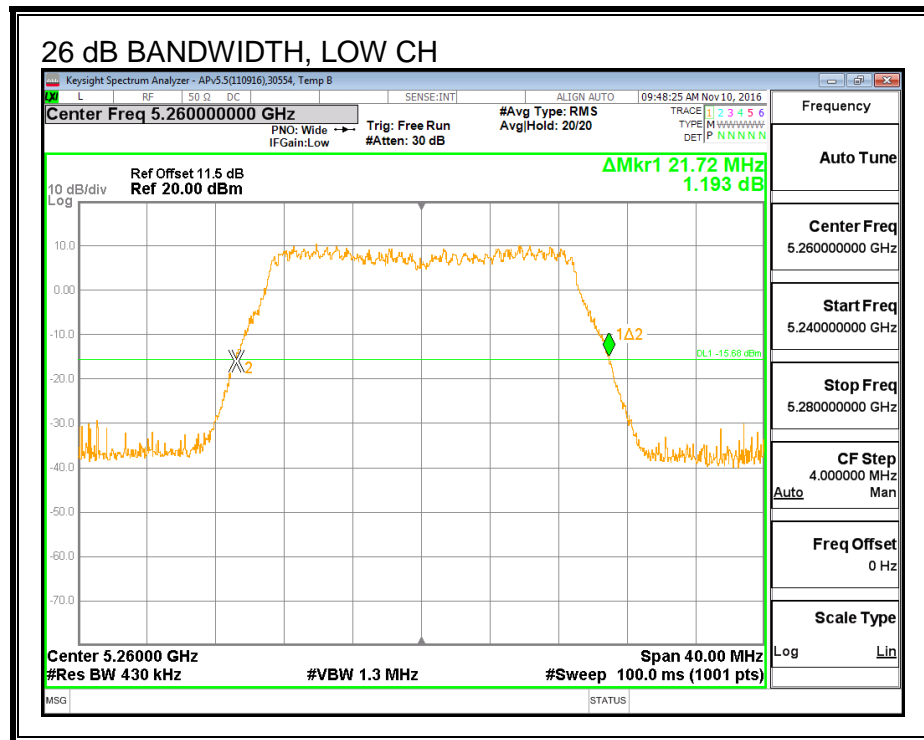

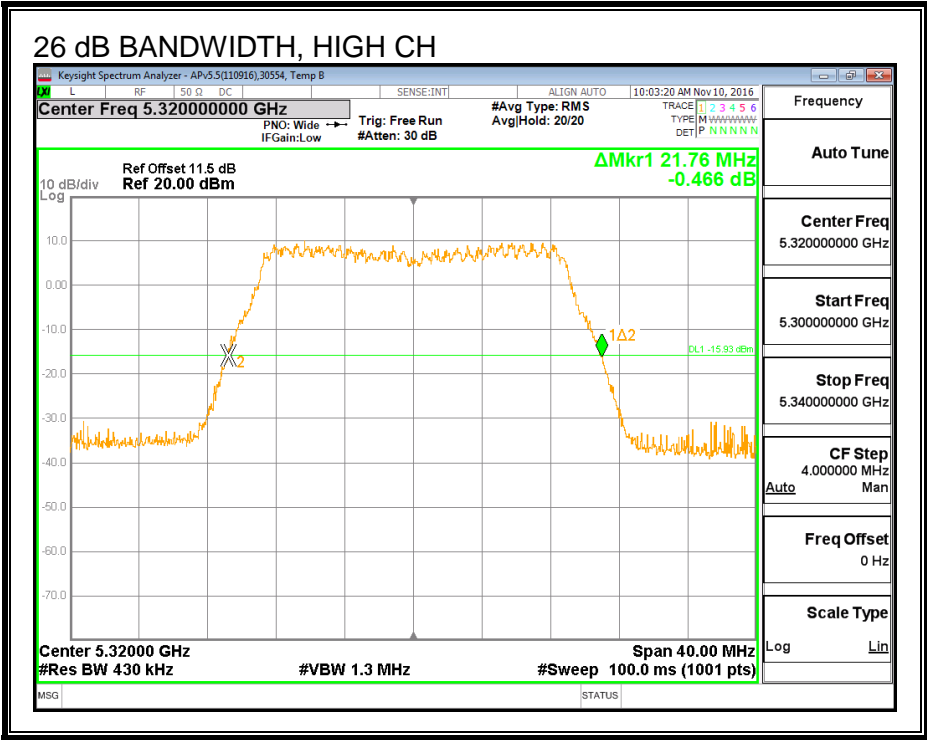

26 dB BANDWIDTH, ANTENNA B

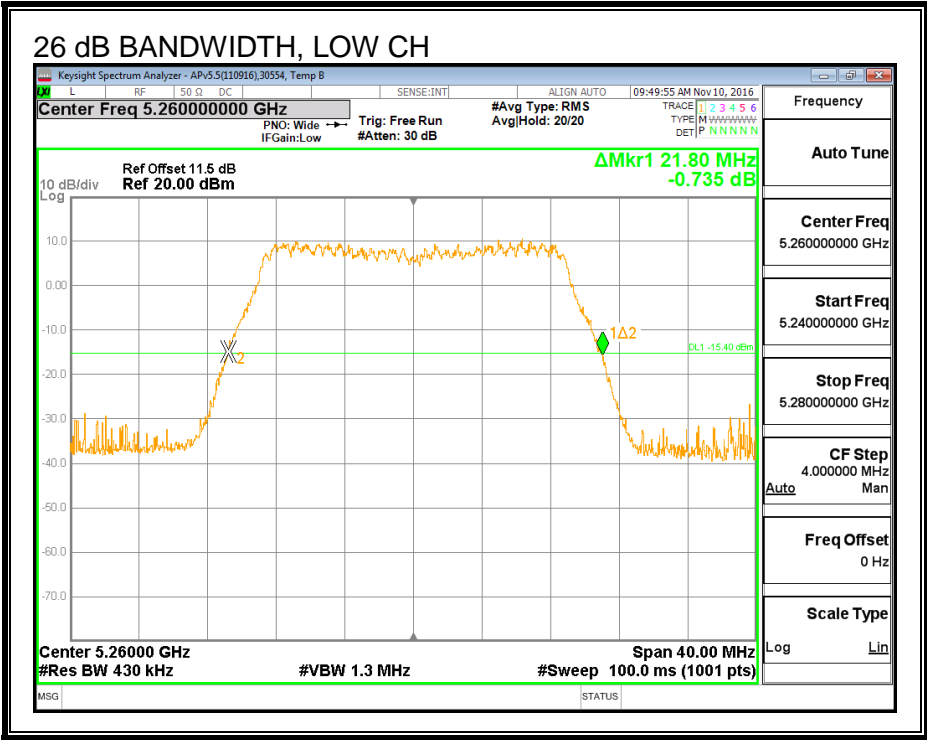

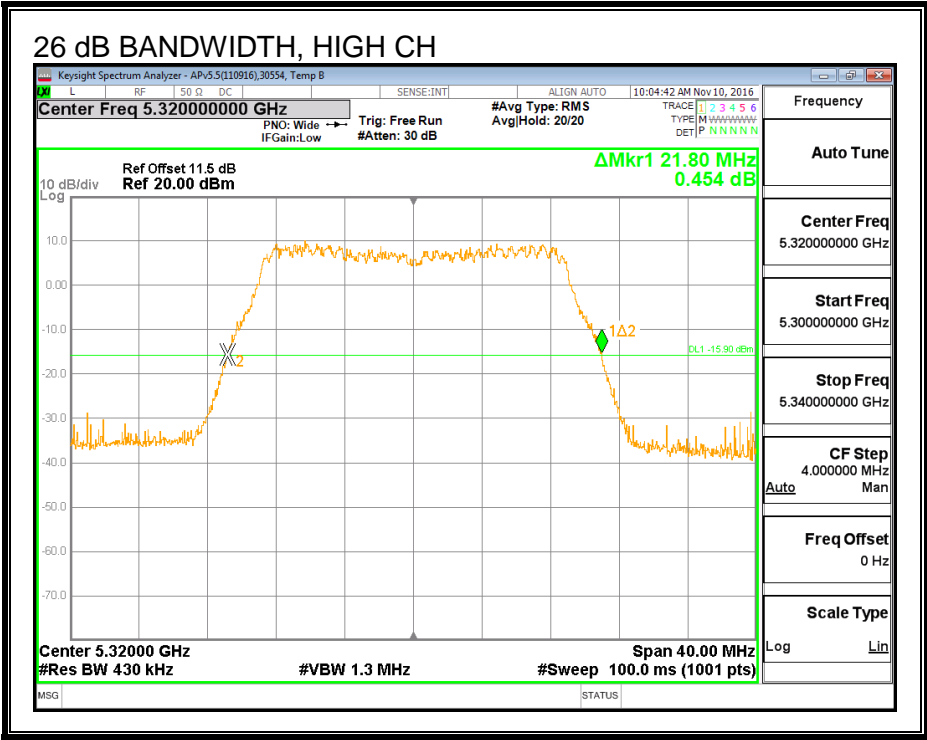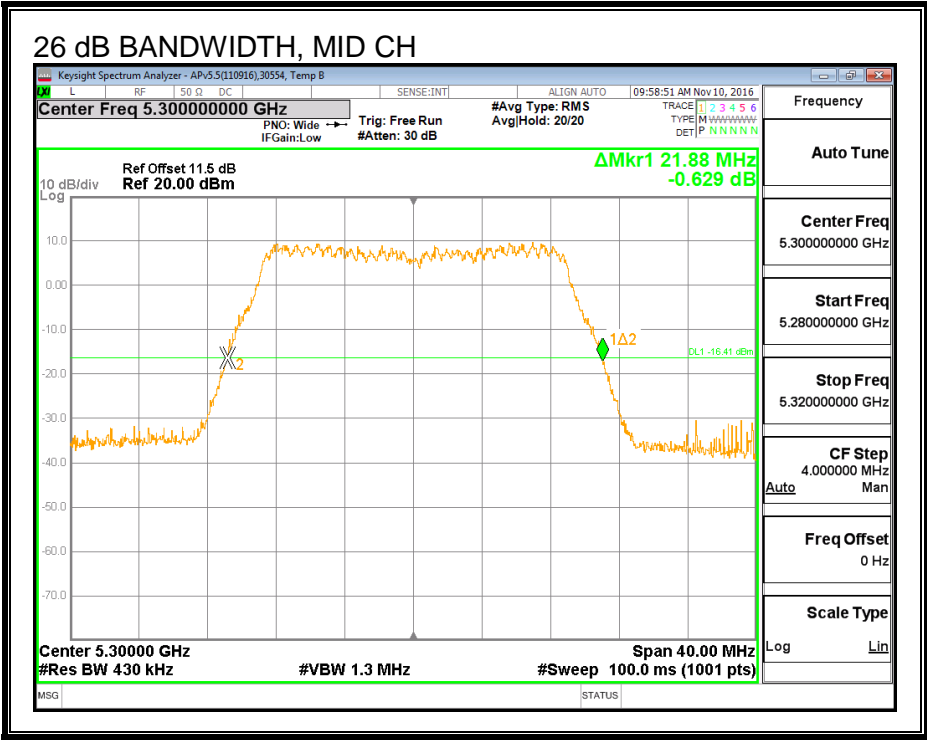

### 8.15.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Low	5260	17.249	17.907
Mid	5300	17.789	17.886
High	5320	17.861	17.770



99% BANDWIDTH, ANTENNA A

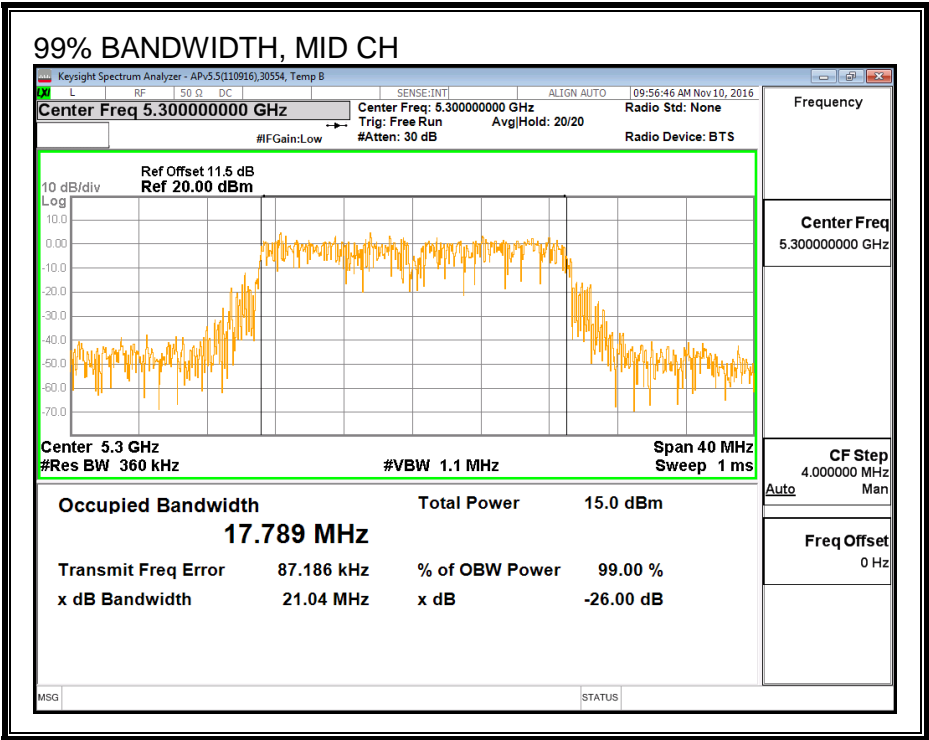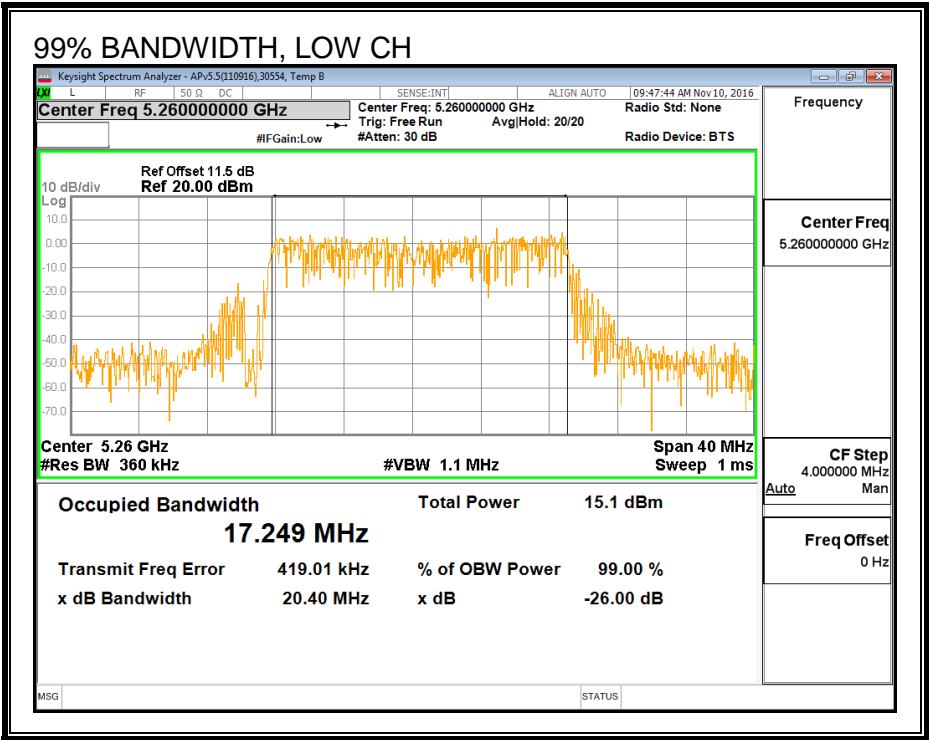

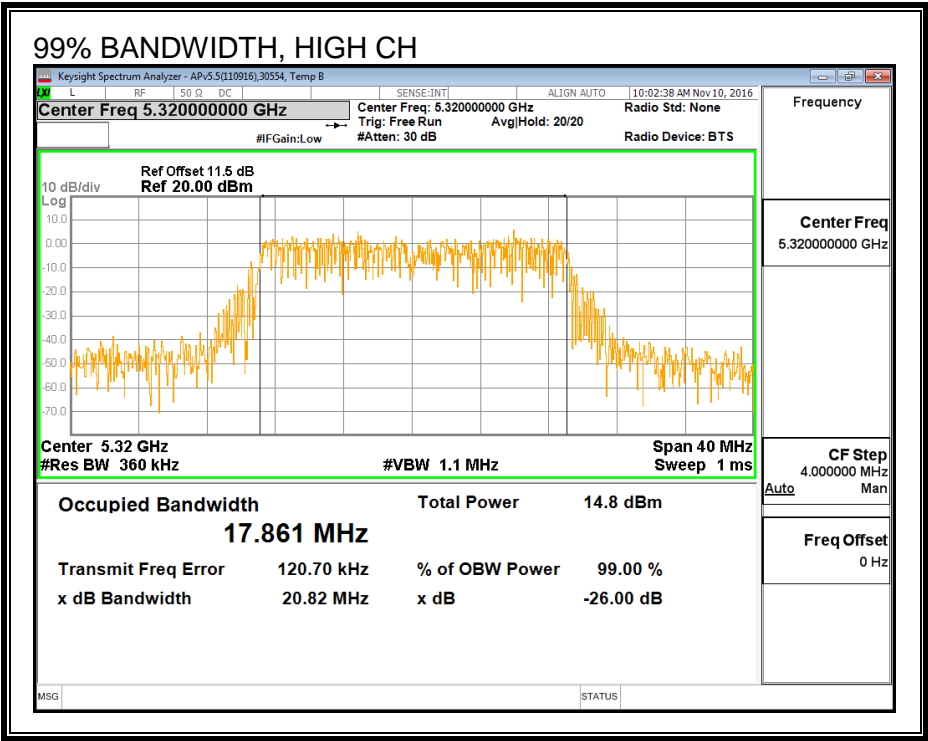

99% BANDWIDTH, ANTENNA B

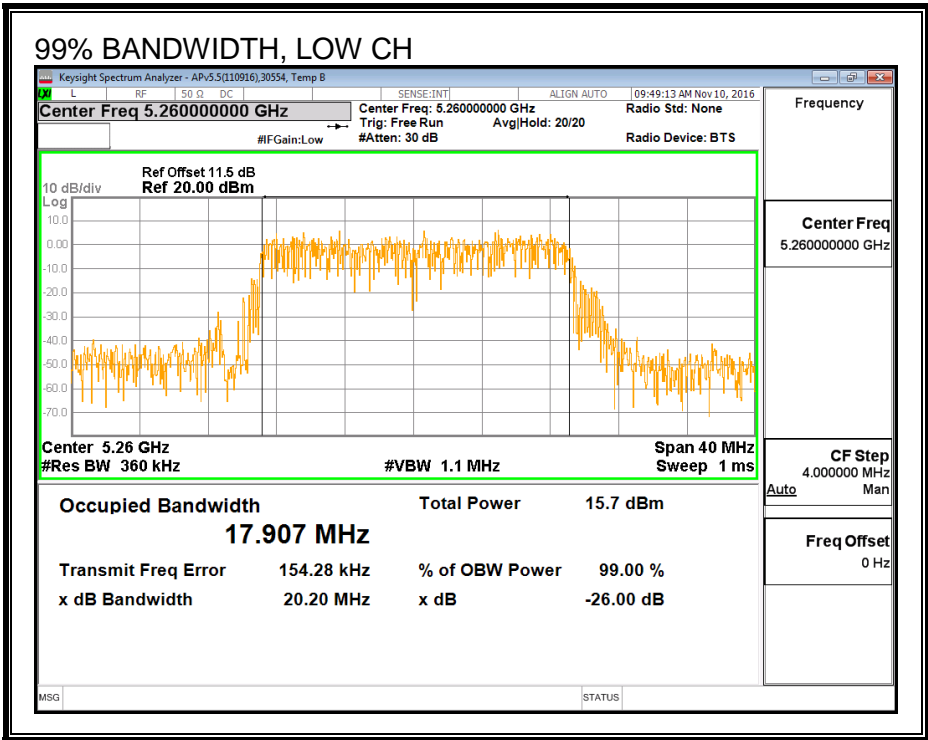

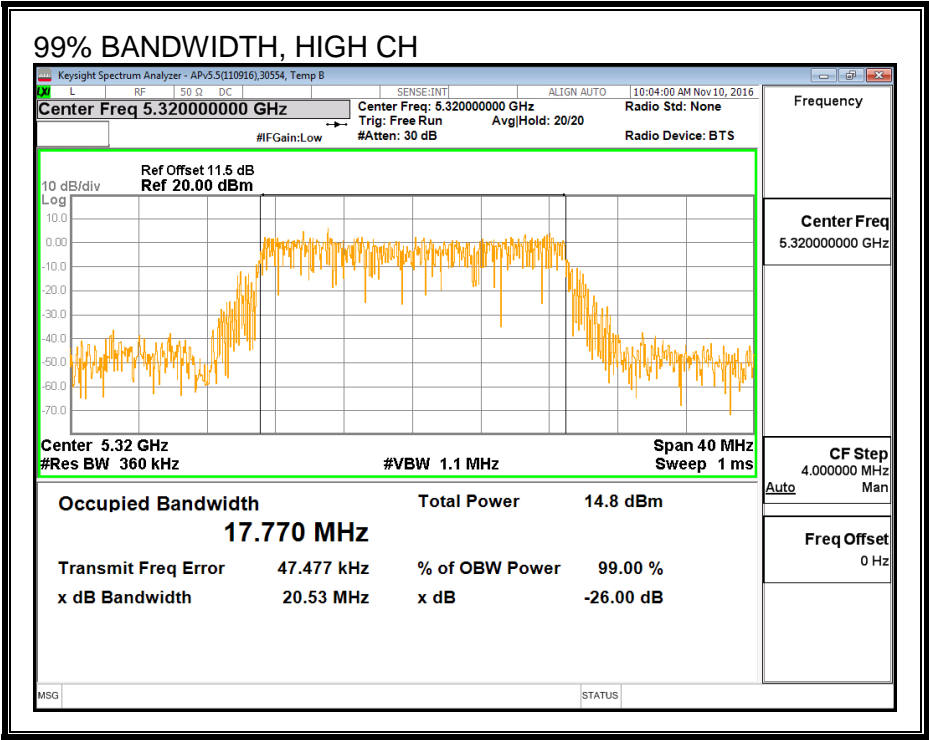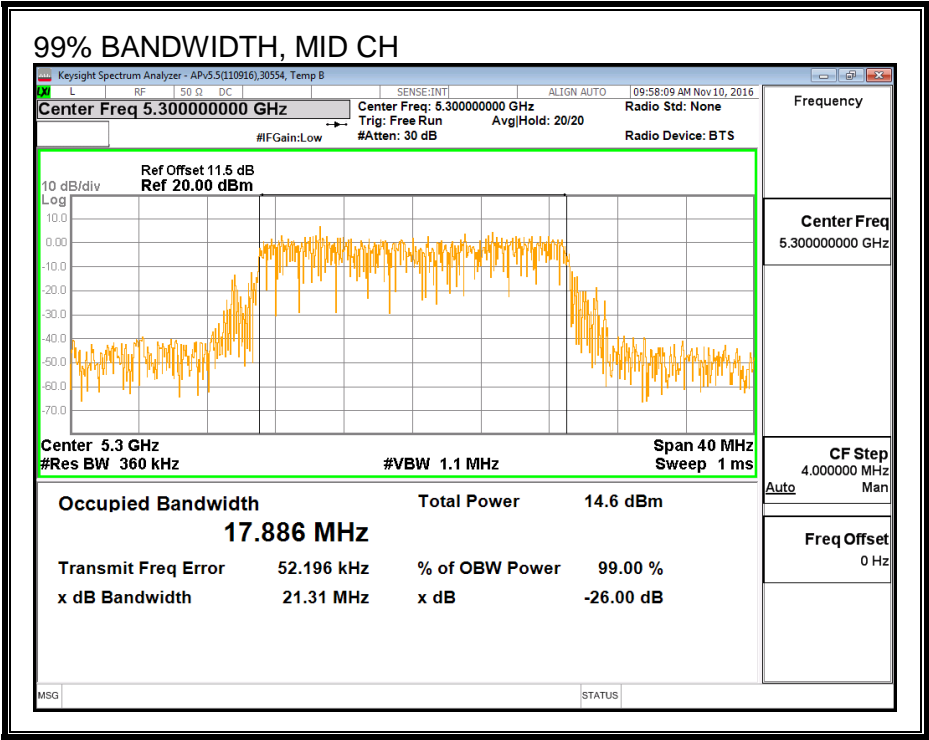

### 8.15.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39316	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

#### Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna B Power (dBm)	Total Power (dBm)
Low	5260	16.47	16.45	19.47
Mid	5300	16.42	16.45	19.45
High	5320	14.50	14.41	17.47

#### 8.15.4. OUTPUT POWER AND PSD

##### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
2.24	2.77	2.51

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.24	2.77	5.52

## RESULTS

<b>ID:</b>	39316	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.72	17.249	2.51	5.52	23.37	11.00
Mid	5300	21.76	17.789	2.51	5.52	23.50	11.00
High	5320	21.76	17.77	2.51	5.52	23.50	11.00

<b>Duty Cycle CF (dB)</b>		<b>Included in Calculations of Corr'd PSD</b>
---------------------------	--	---



### Output Power Results


Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.47	16.45	19.47	23.37	-3.90
Mid	5300	16.42	16.45	19.45	23.50	-4.06
High	5320	14.50	14.41	17.47	23.50	-6.03

### PSD Results


Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.99	6.23	9.12	11.00	-1.88
Mid	5300	5.87	5.86	8.88	11.00	-2.12
High	5320	5.59	5.48	8.54	11.00	-2.46



PSD, ANTENNA A

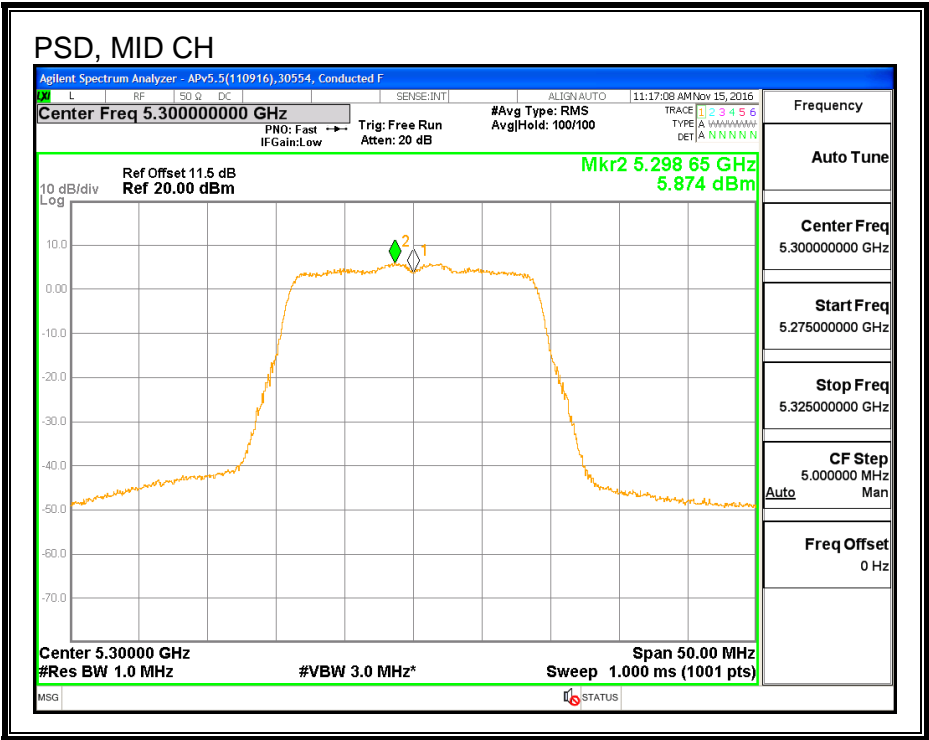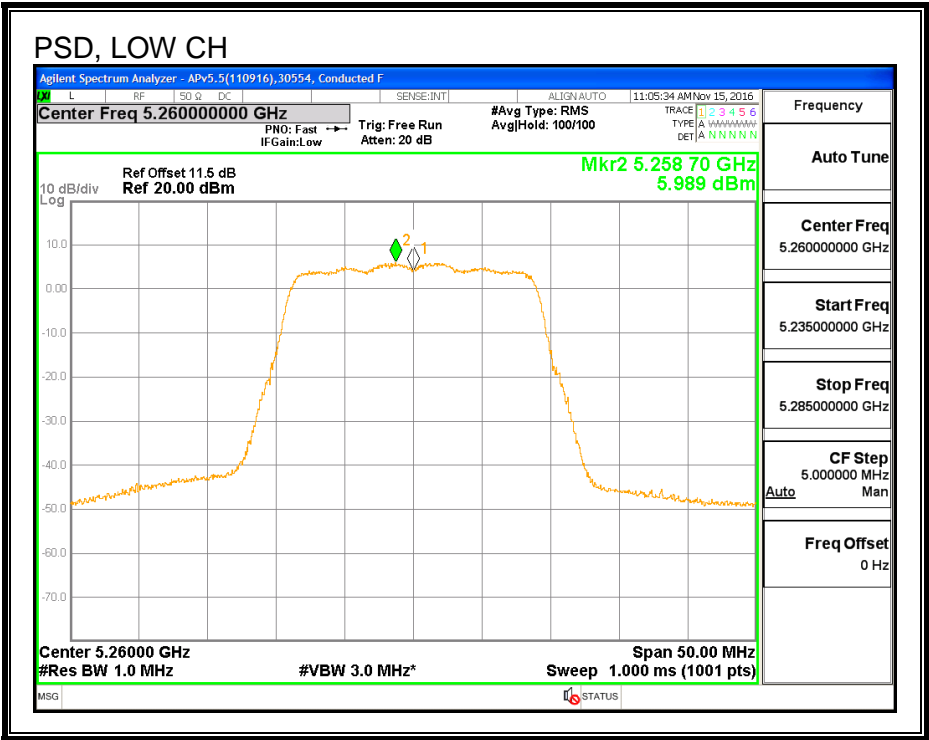

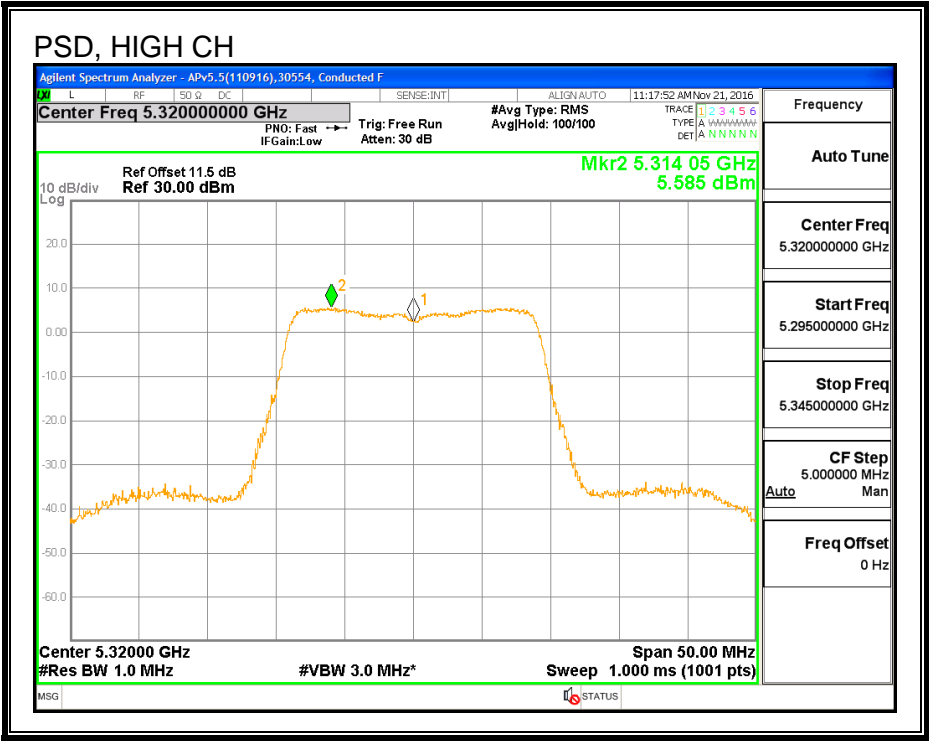

PSD, ANTENNA B

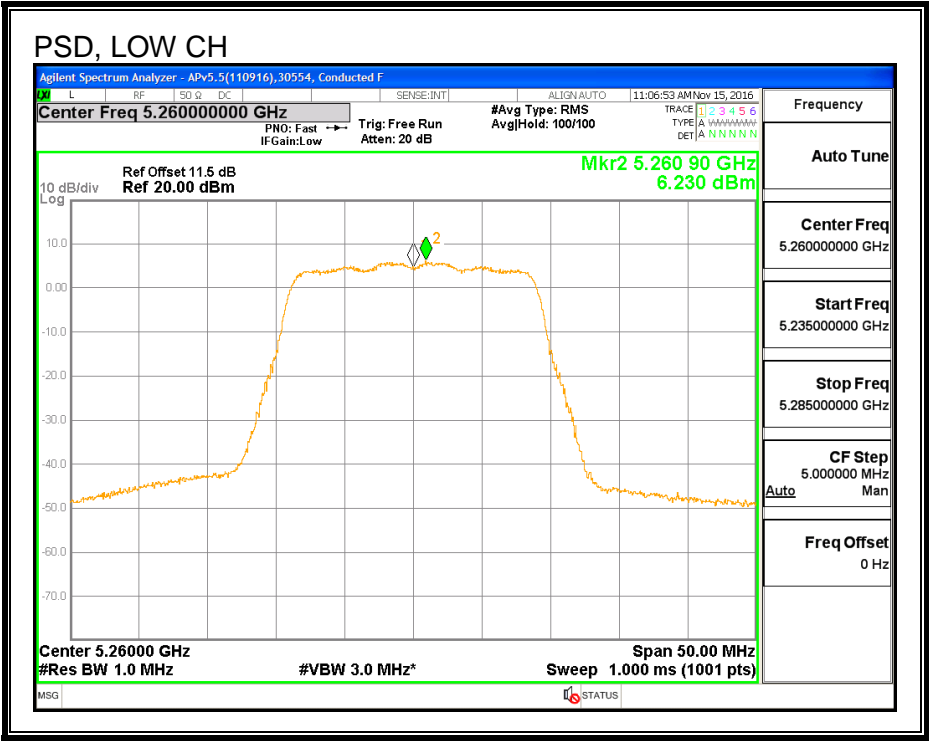

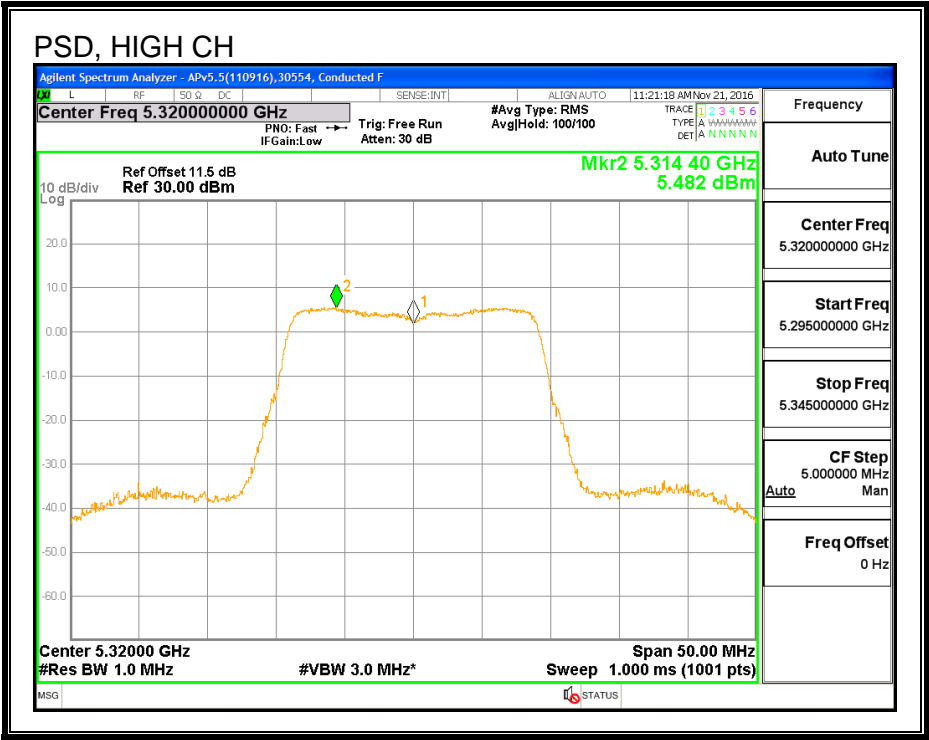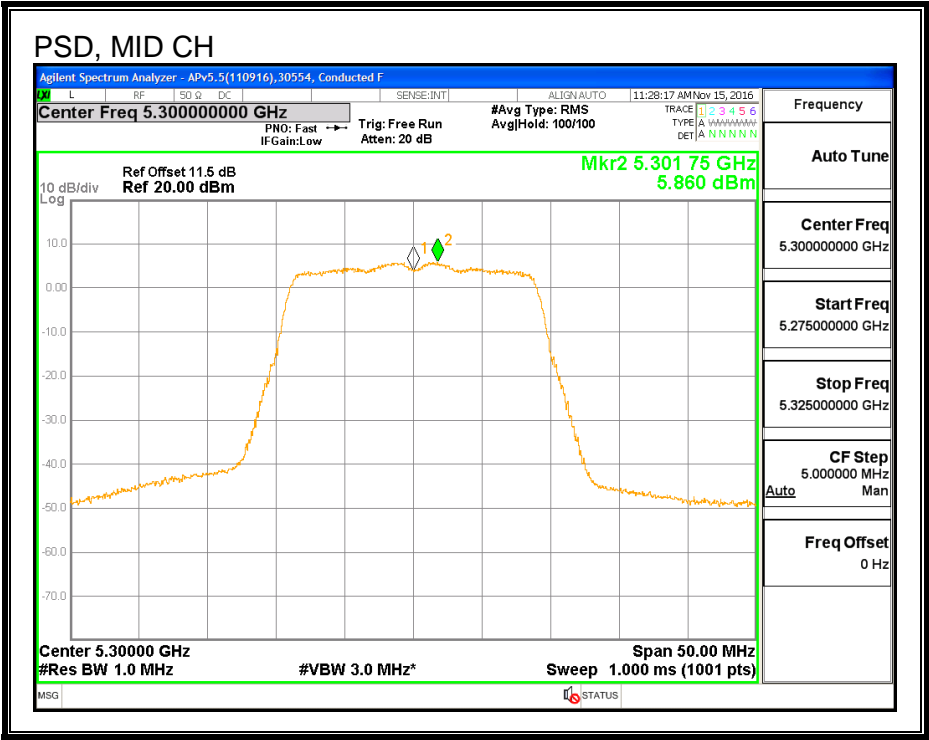

## 8.16. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND



### 8.16.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS



Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Low	5260	21.80	21.92
Mid	5300	21.84	21.80
High	5320	21.96	21.92

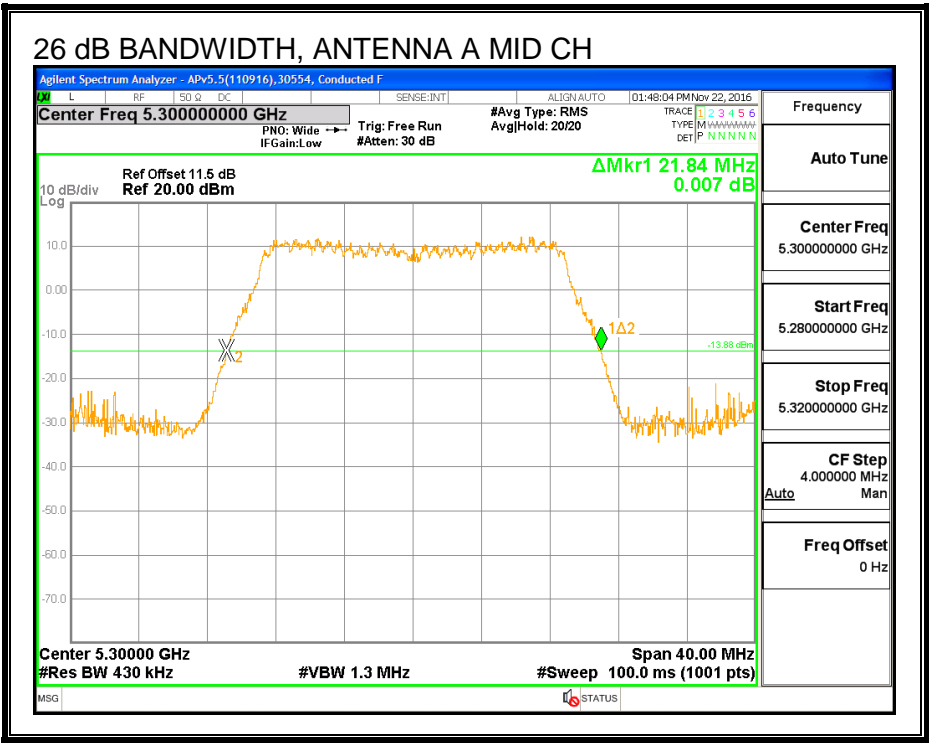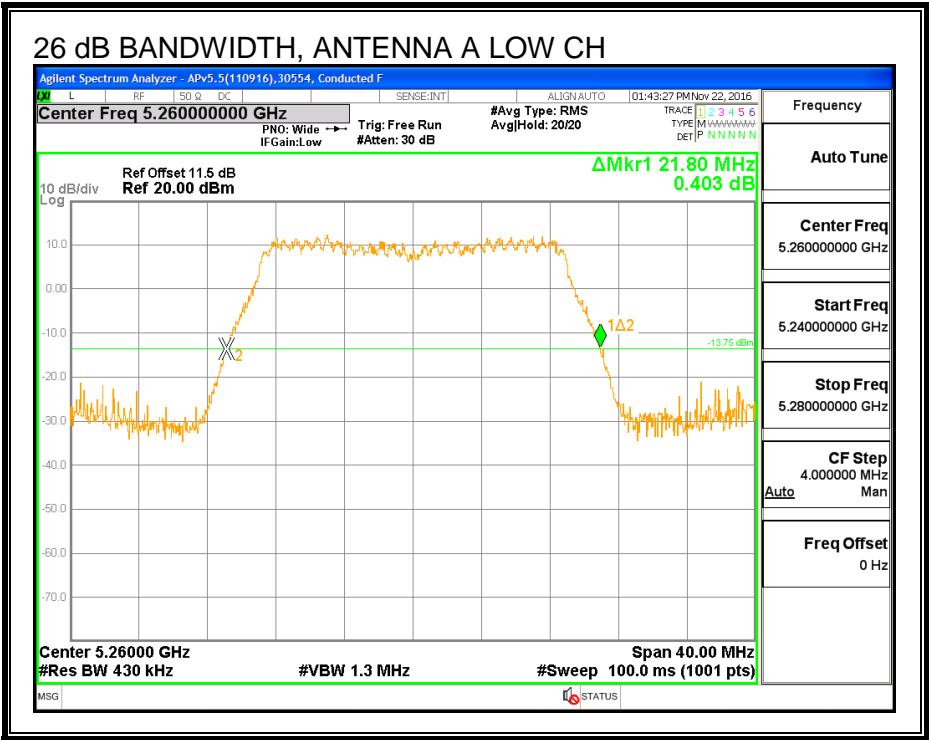

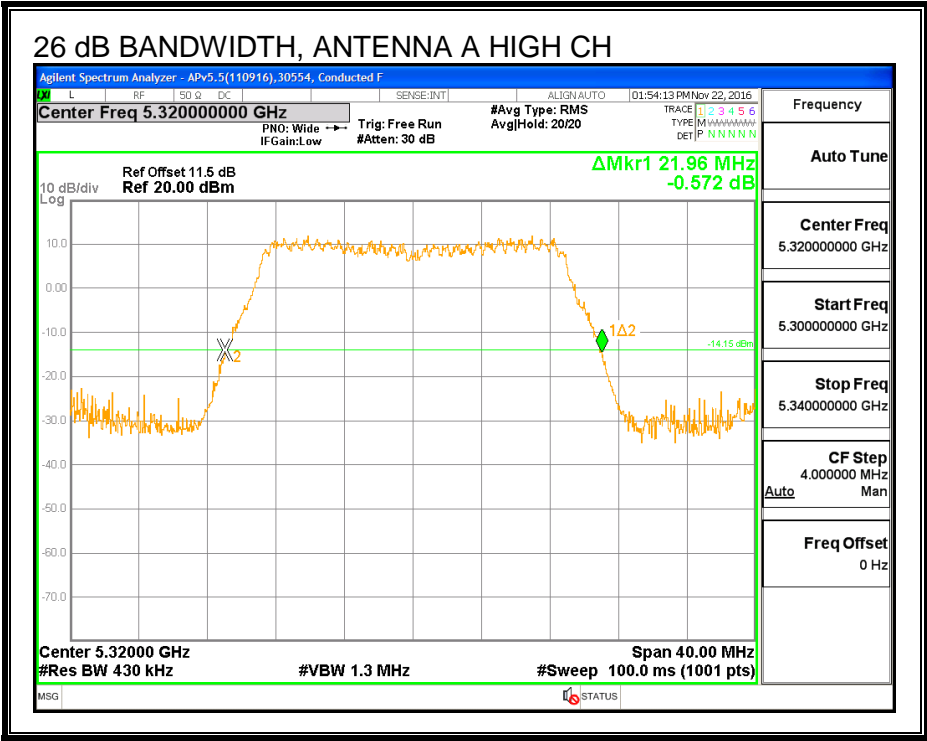

26 dB BANDWIDTH, ANTENNA B

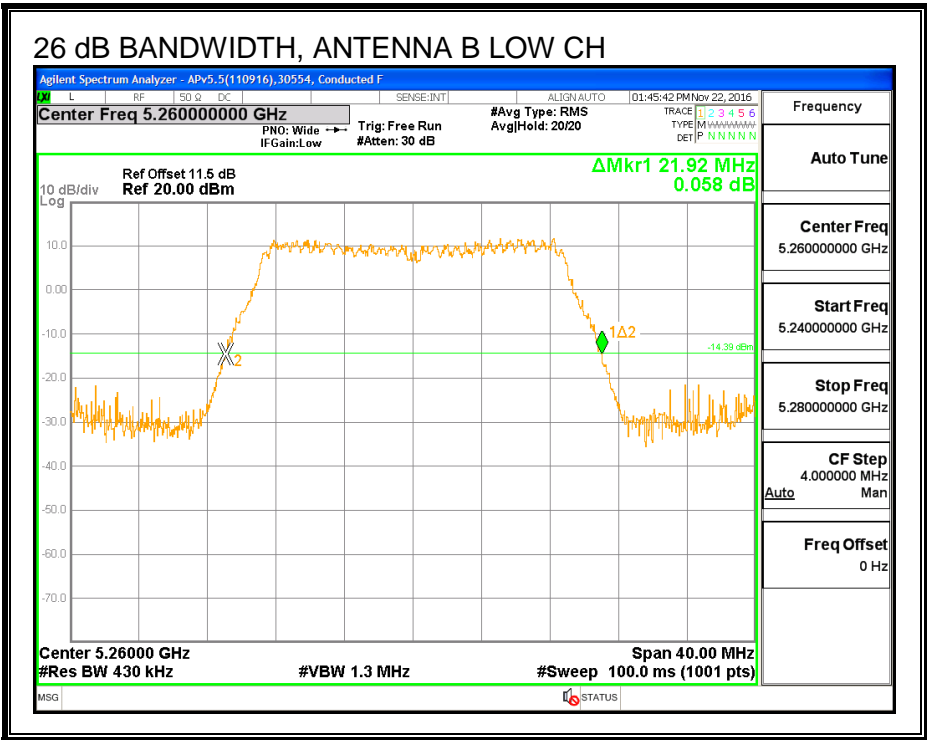

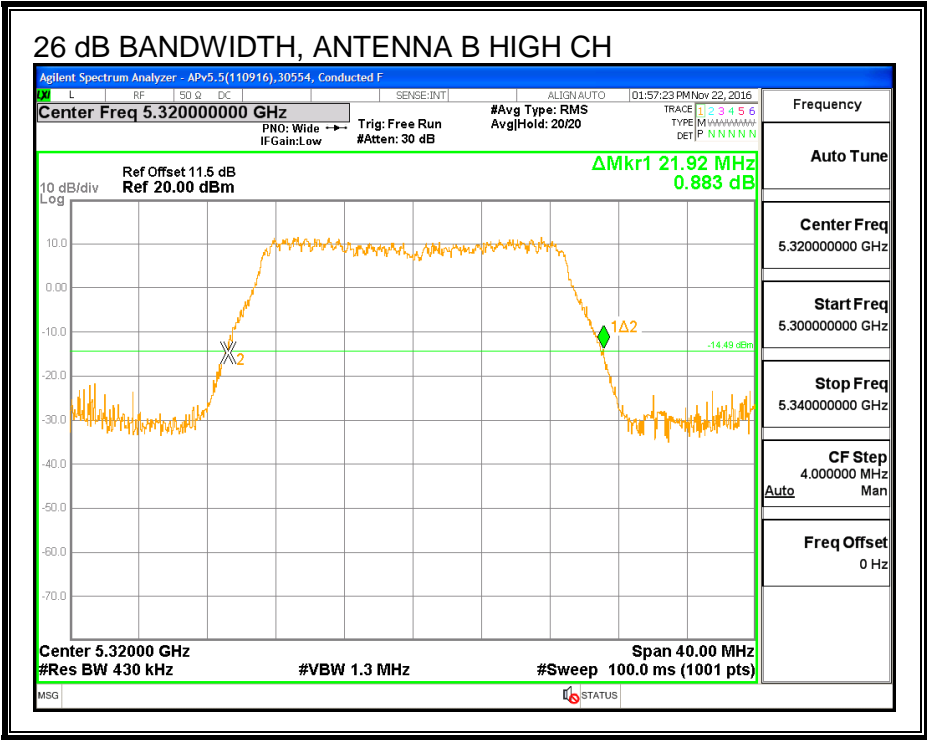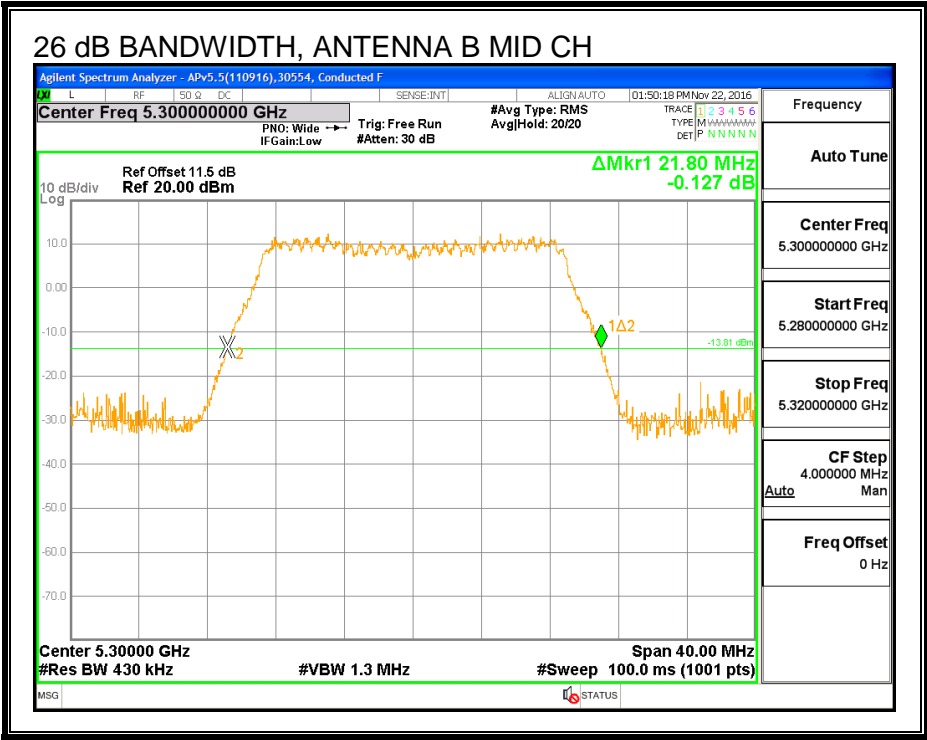

---



**8.16.2. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.


**RESULTS**



Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Low	5260	17.7040	17.8930
Mid	5300	17.7410	17.7790
High	5320	17.8350	17.7750

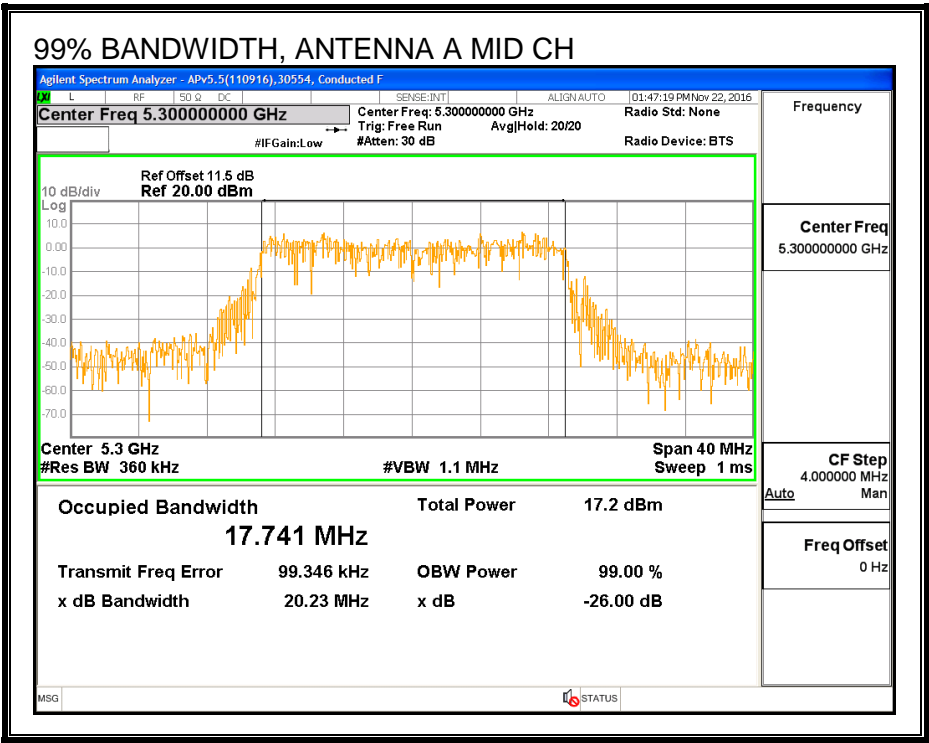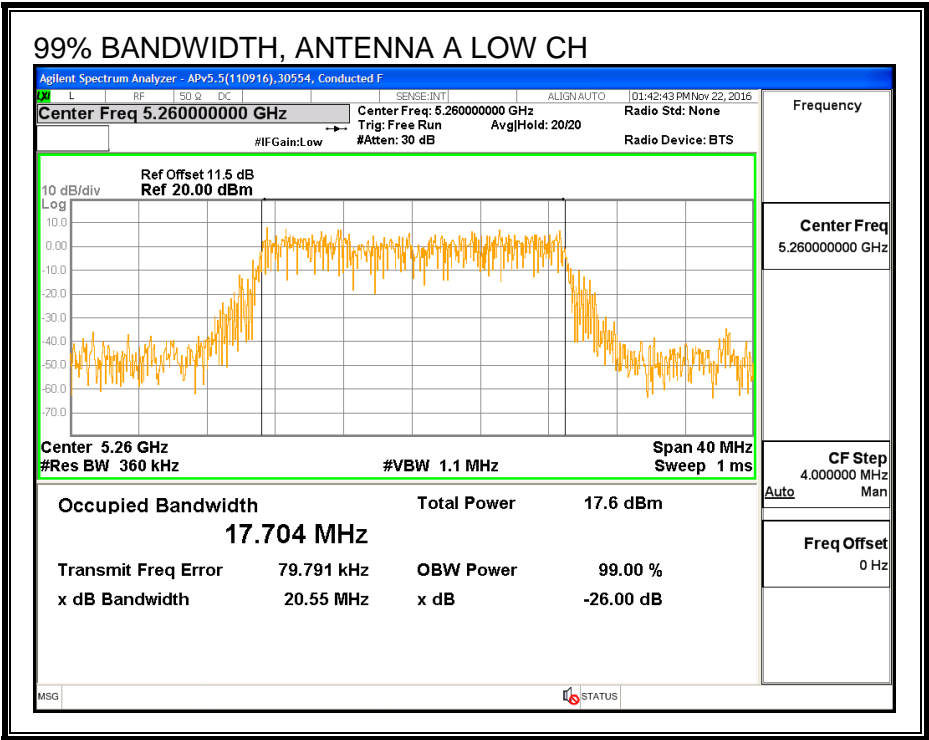

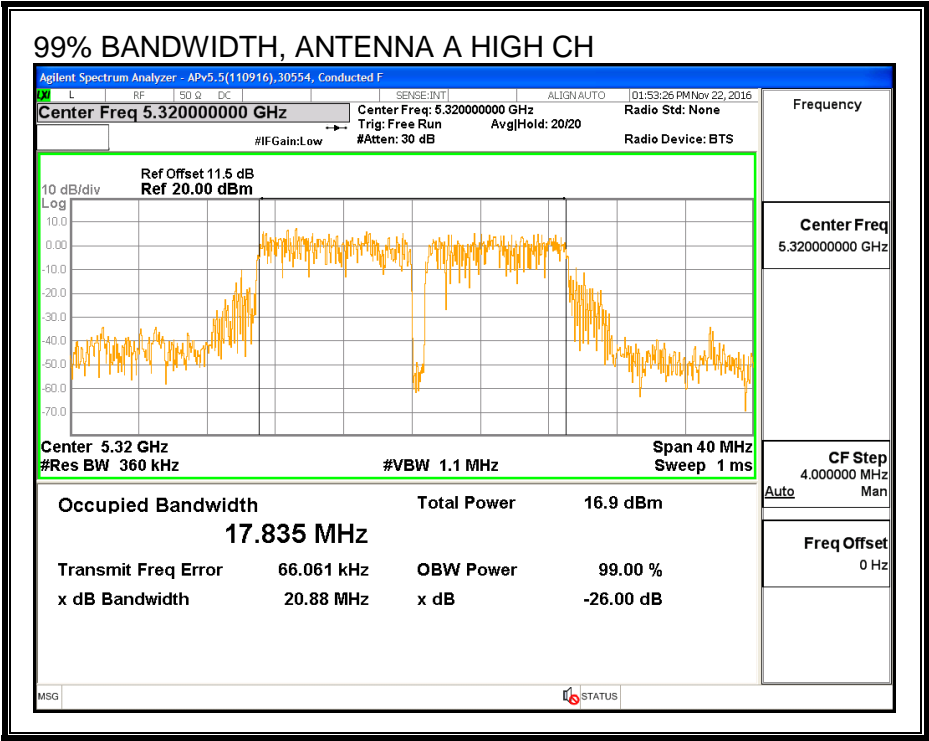

99% BANDWIDTH, ANTENNA B

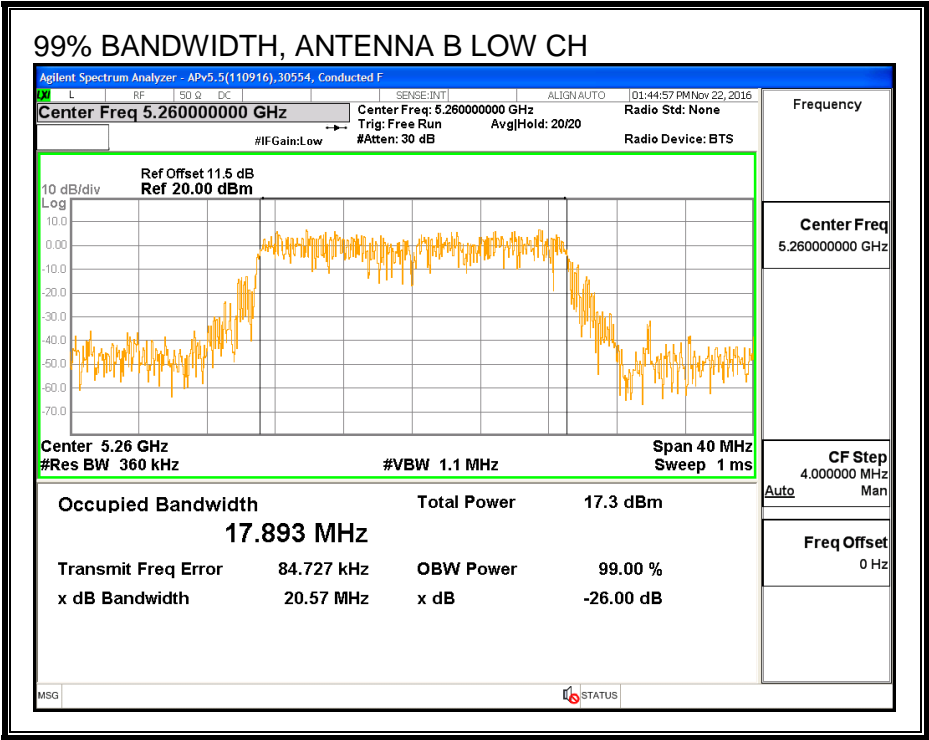

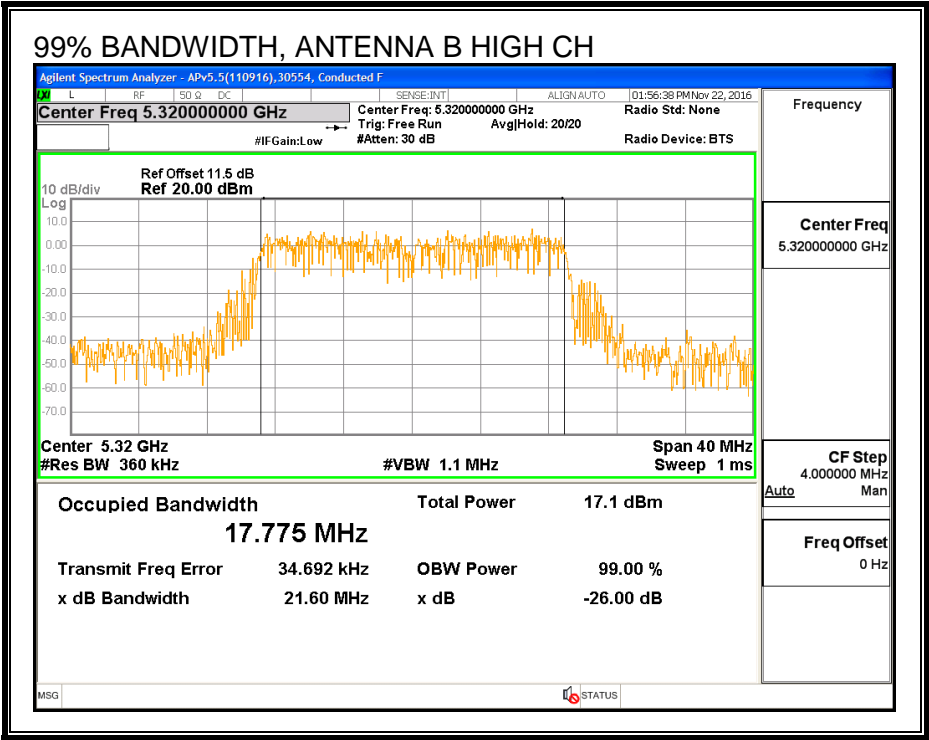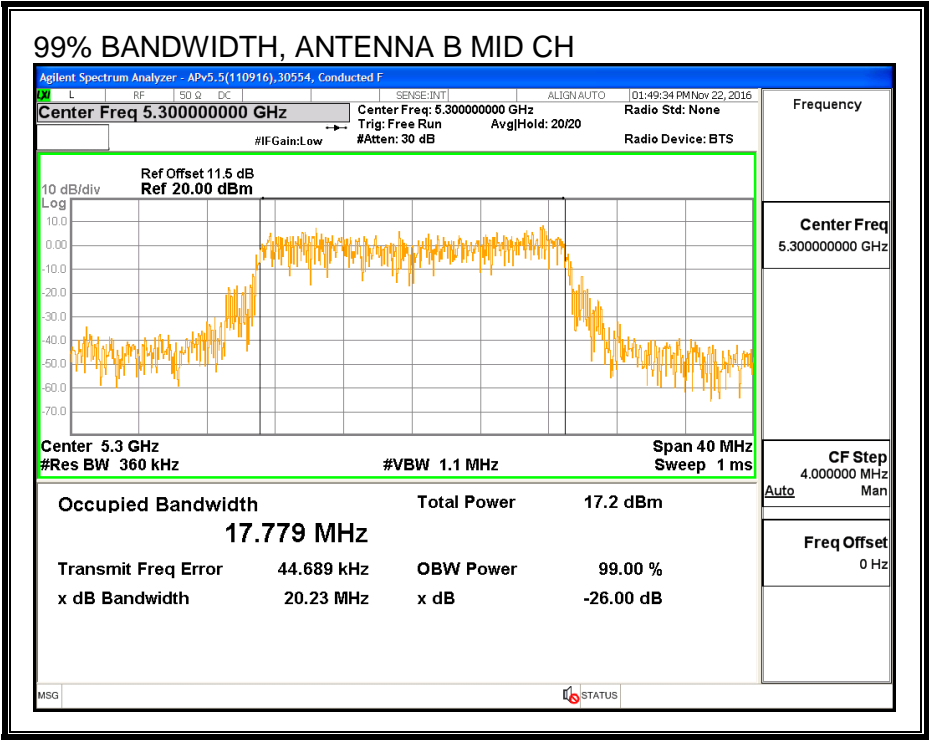

### 8.16.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

<b>ID:</b>	39316	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

#### Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna B Power (dBm)	Total Power (dBm)
Low	5260	16.99	16.91	19.96
Mid	5300	16.88	16.95	19.93
High	5320	14.39	14.47	17.44

## 8.16.4. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Use this table for uncorrelated chains and unequal antenna gain

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
2.24	2.77	2.51

## RESULTS

### Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.92	2.51	2.51	24.00	11.00
Mid	5300	21.84	2.51	2.51	24.00	11.00
High	5320	21.96	2.51	2.51	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


### Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.99	16.91	19.96	24.00	-4.04
Mid	5300	16.88	16.95	19.93	24.00	-4.07
High	5320	14.39	14.47	17.44	24.00	-6.56


### PSD Results



Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.96	5.75	8.86	11.00	-2.14
Mid	5300	5.69	5.83	8.77	11.00	-2.23
High	5320	5.70	5.96	8.84	11.00	-2.16

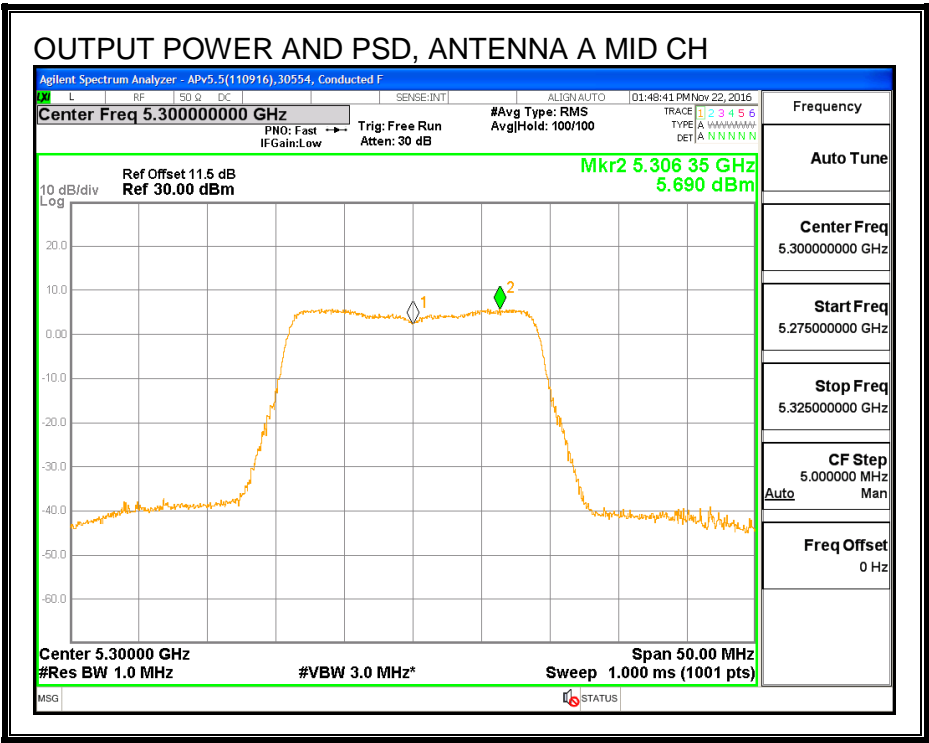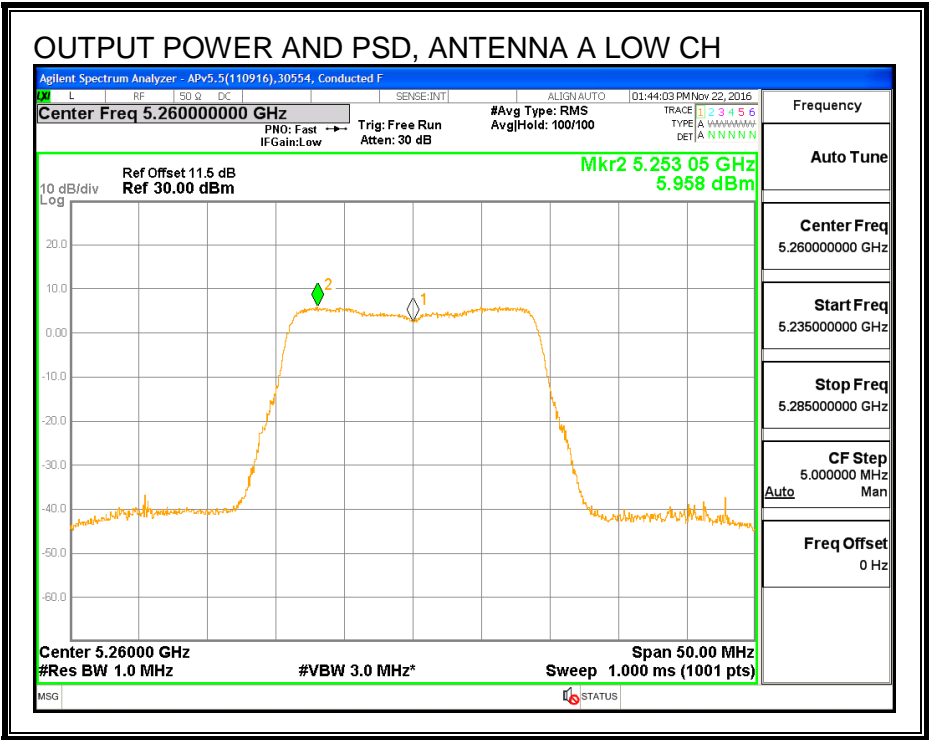

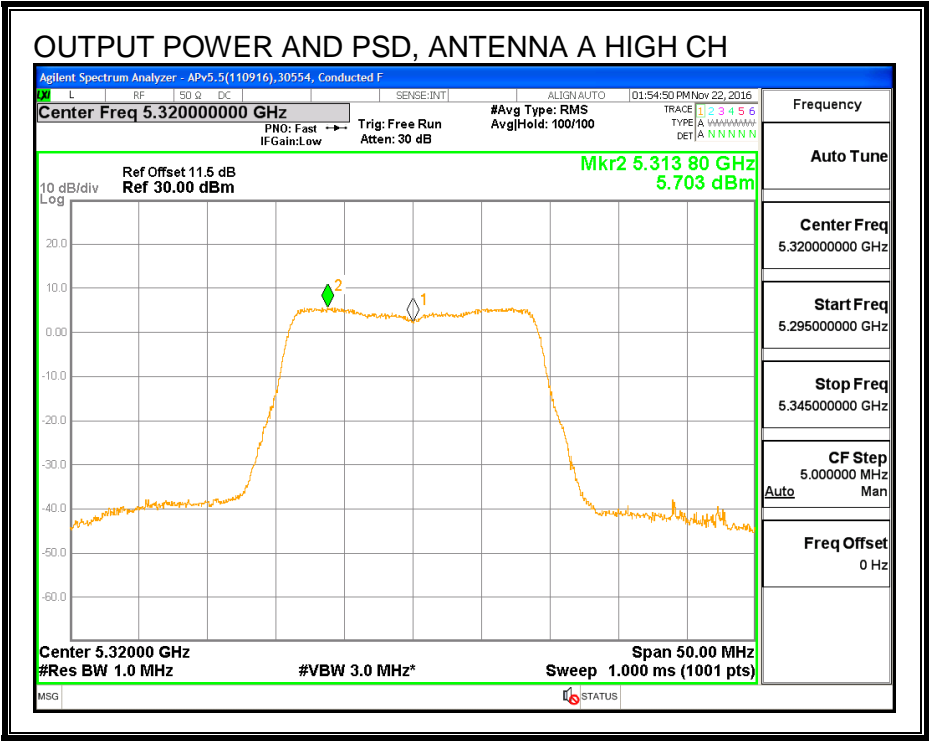

OUTPUT POWER AND PSD, ANTENNA B

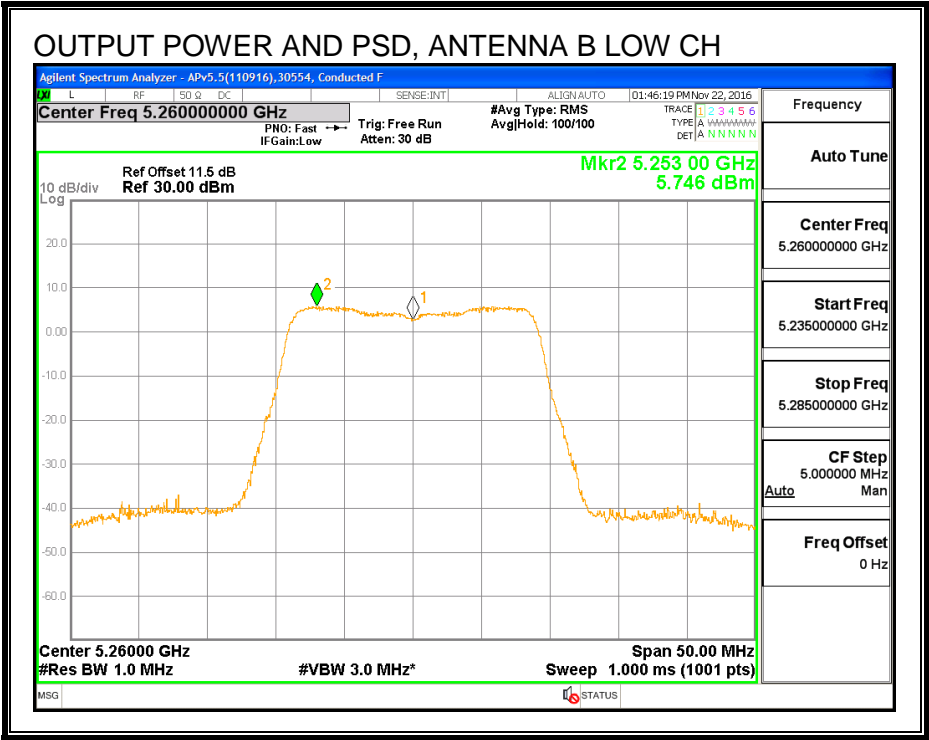

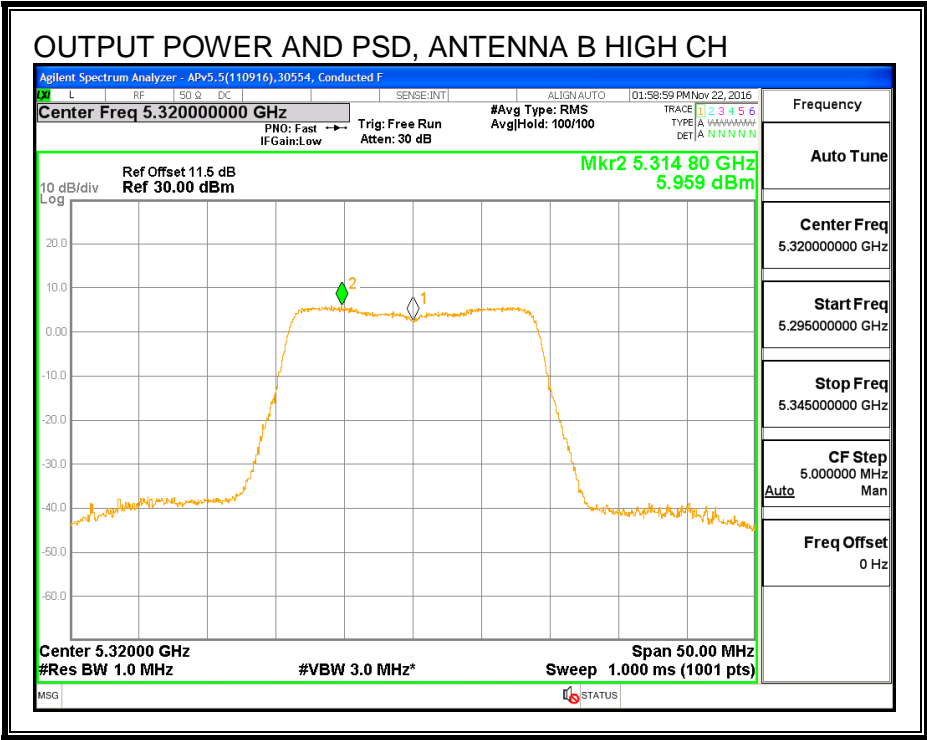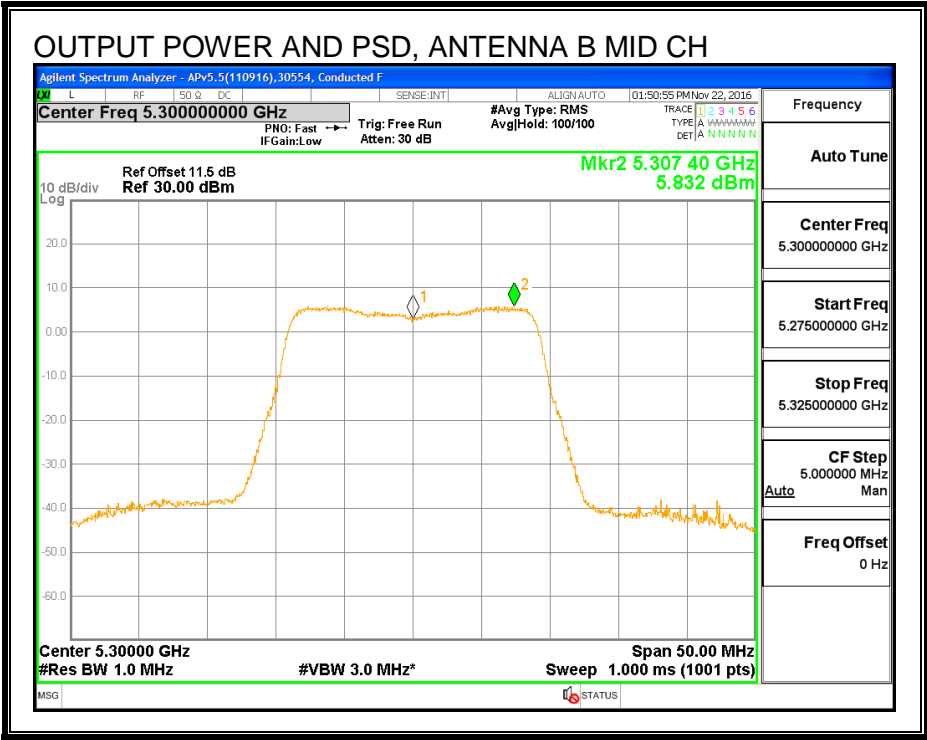

## 8.17. 802.11n HT40 ANTENNA A MODE IN THE 5.3 GHz BAND

### 8.17.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.480
High	5310	40.320

26 dB BANDWIDTH

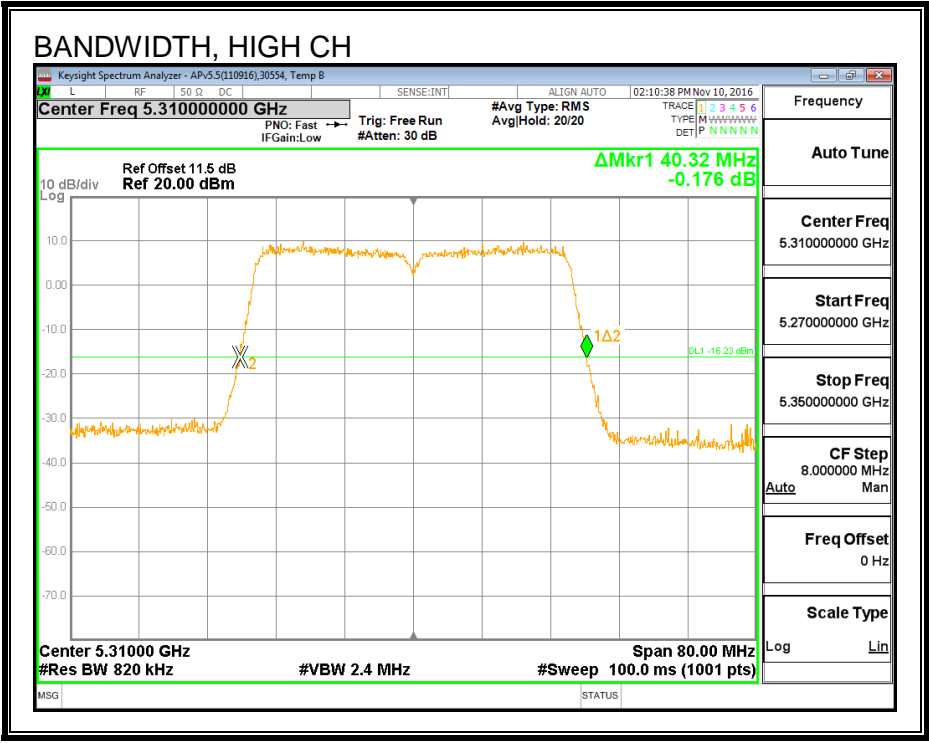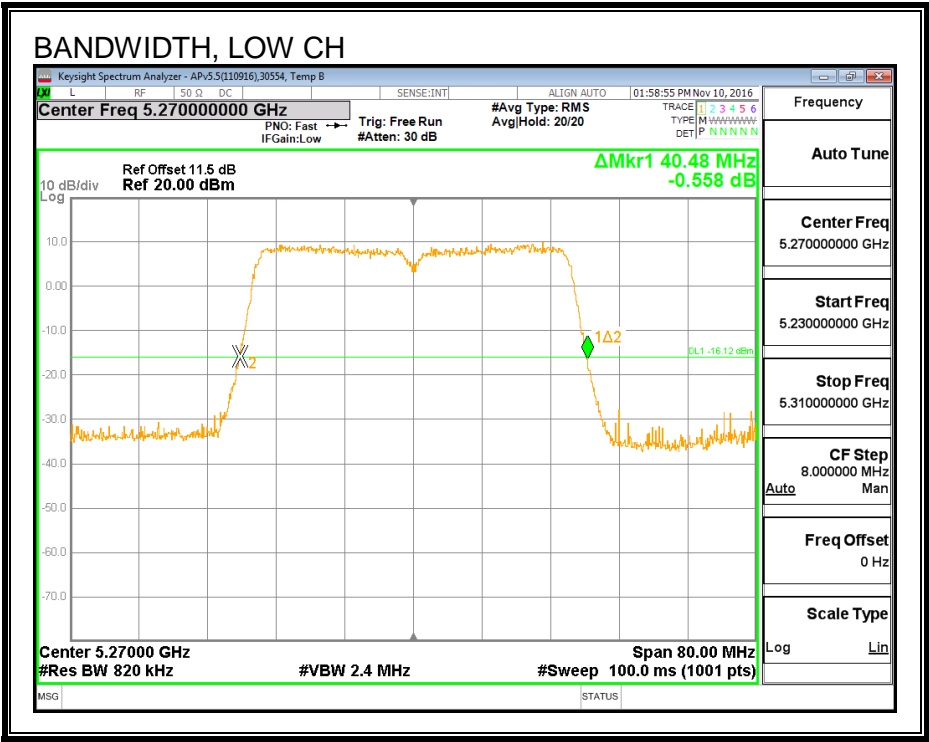

### 8.17.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.676
High	5310	36.399

99% BANDWIDTH

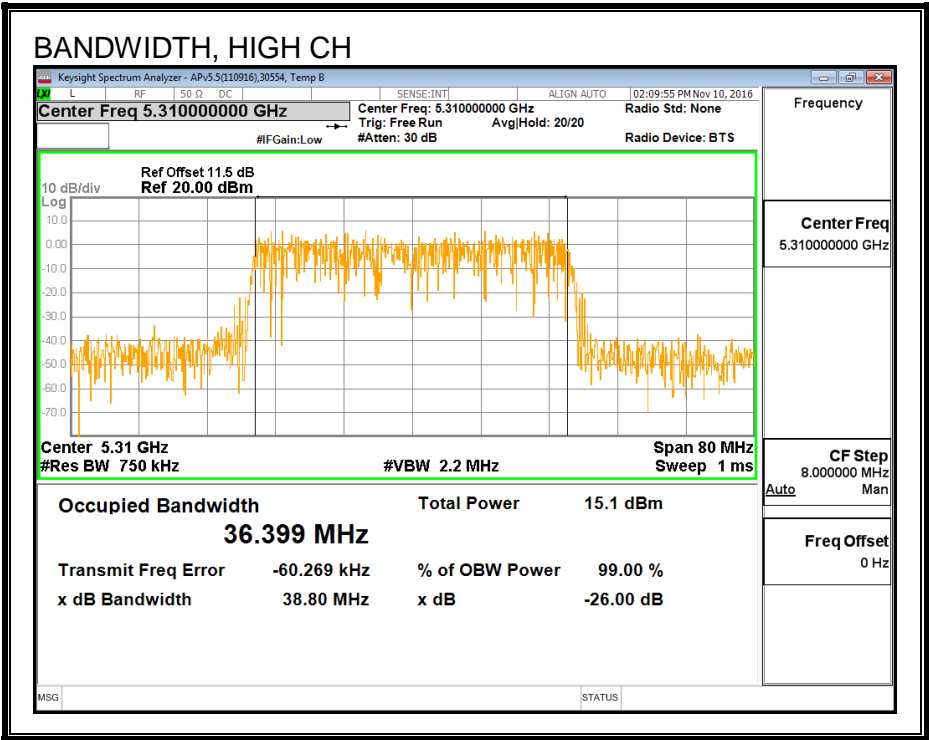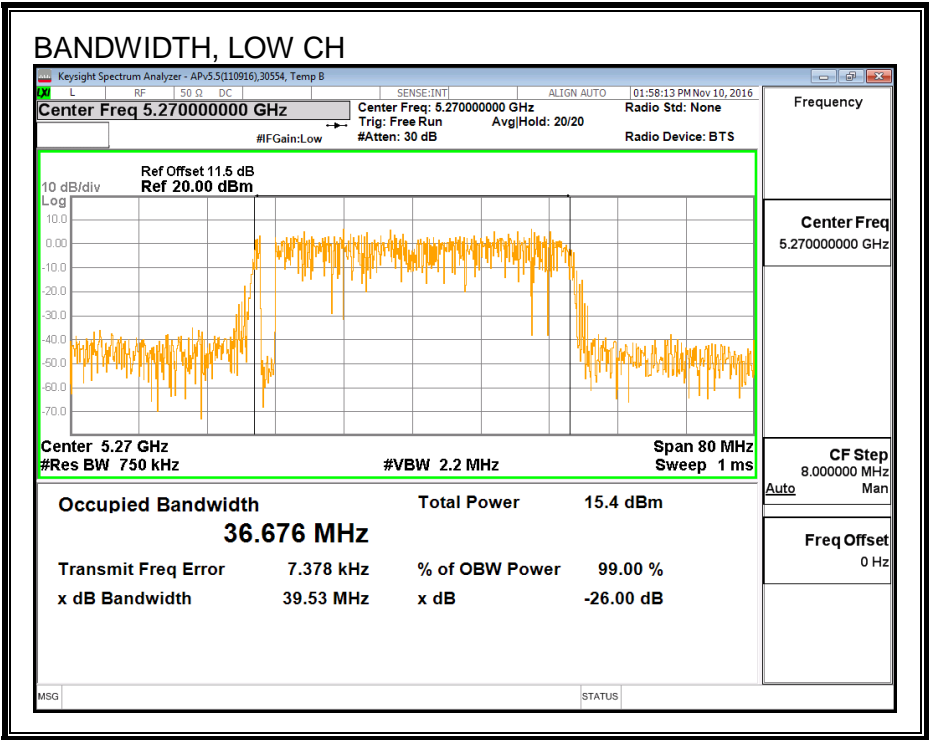

### 8.17.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5270	16.86
High	5310	14.39

#### **8.17.4. OUTPUT POWER AND PSD**

##### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.480	36.676	2.24	24.00	11.00
High	5310	40.320	36.399	2.24	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



### Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	16.86	16.86	24.00	-7.14
High	5310	14.39	14.39	24.00	-9.61

### PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	3.069	3.17	11.00	-7.83
High	5310	2.513	2.61	11.00	-8.39

PSD

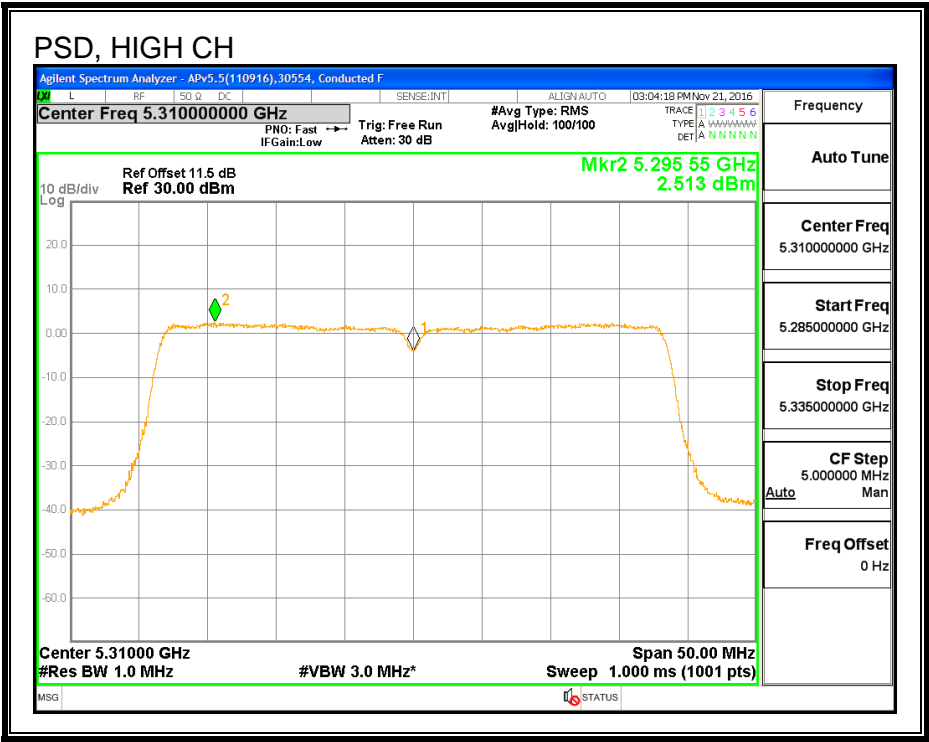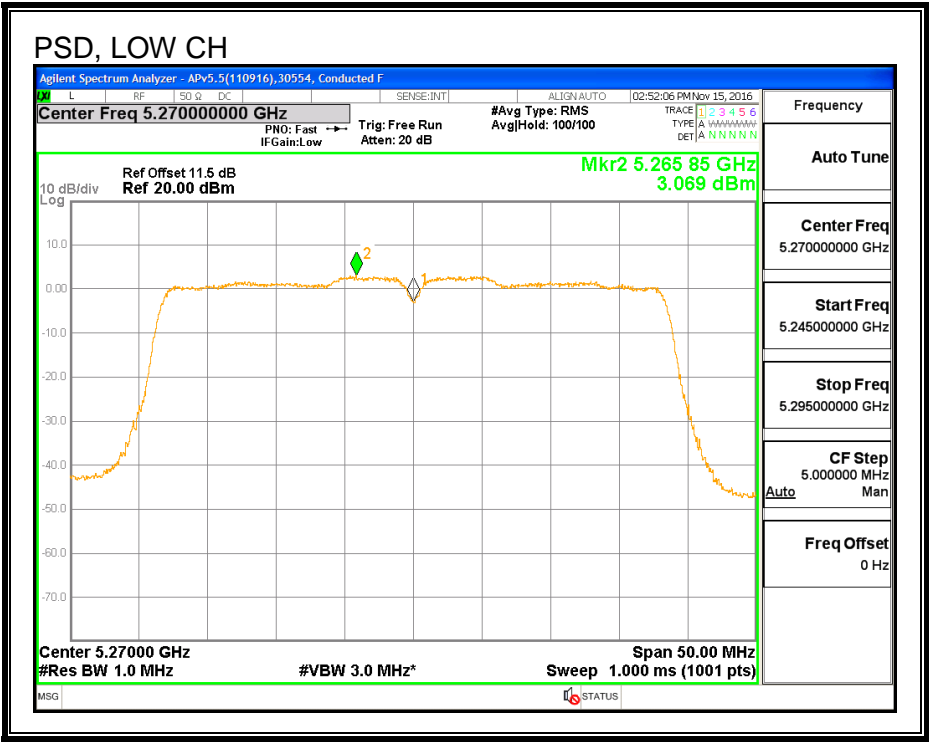

## 8.18. 802.11n HT40 ANTENNA B MODE IN THE 5.3 GHz BAND

### 8.18.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.400
High	5310	40.640

26 dB BANDWIDTH

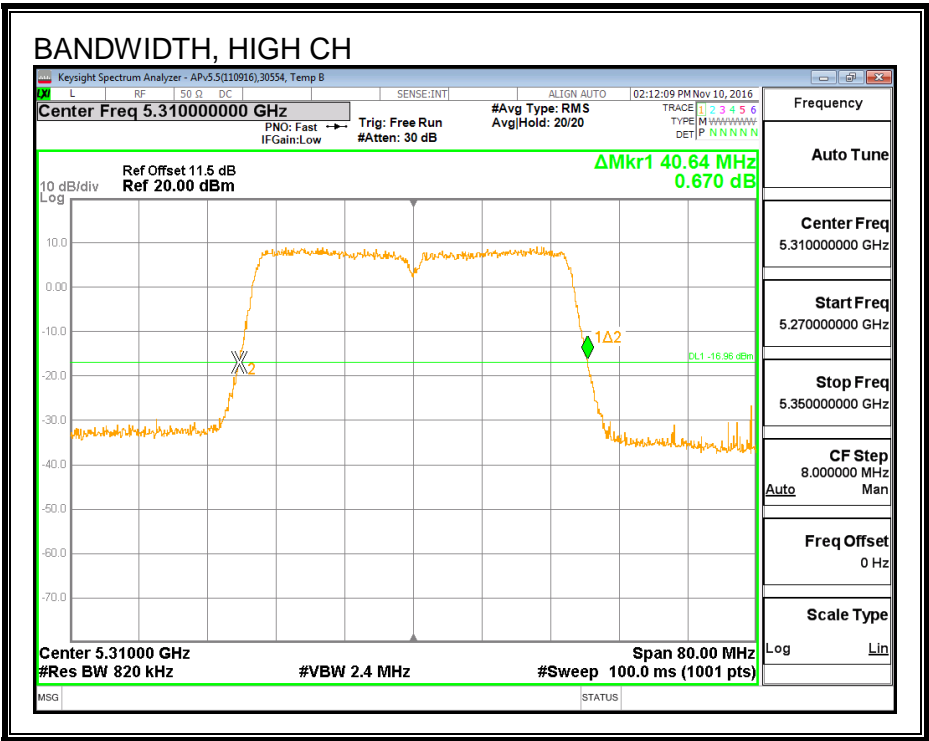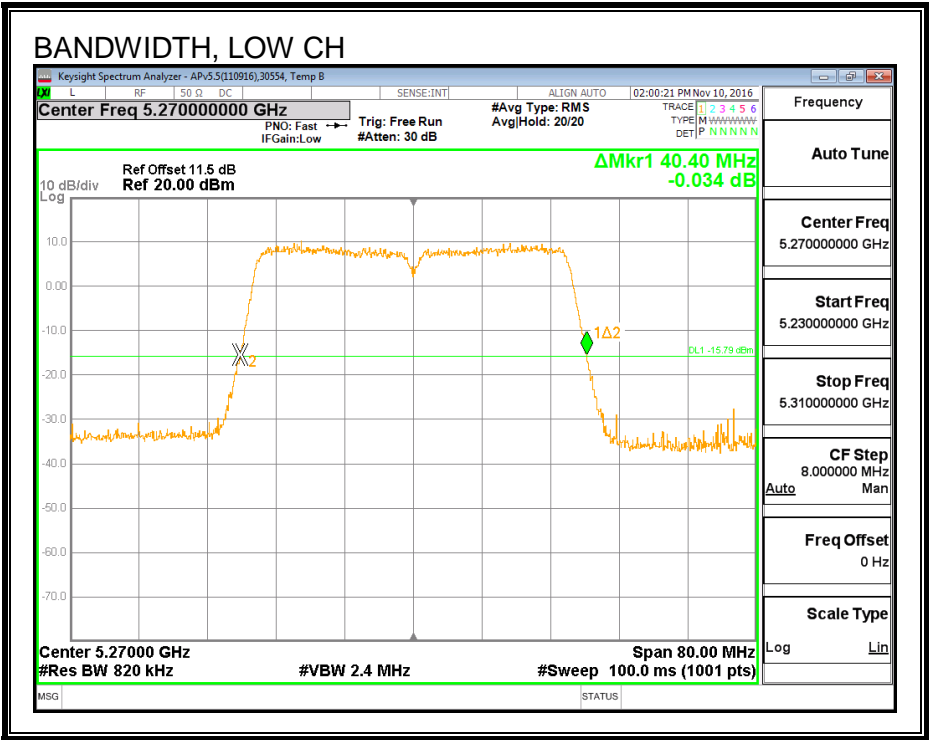

### 8.18.2. 99% BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	35.648
High	5310	36.415

99% BANDWIDTH

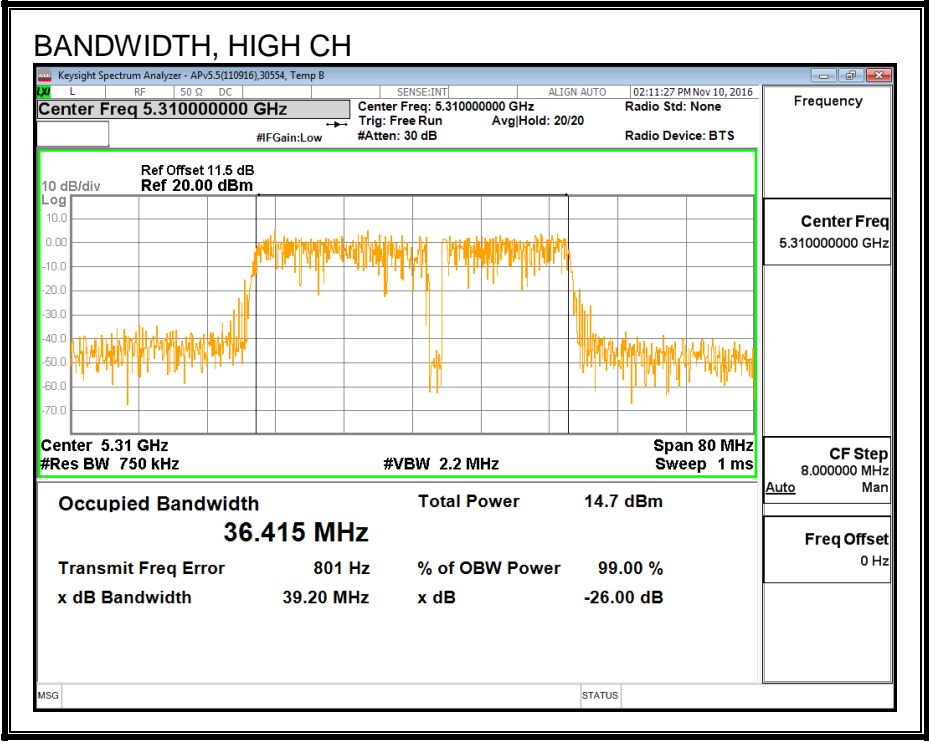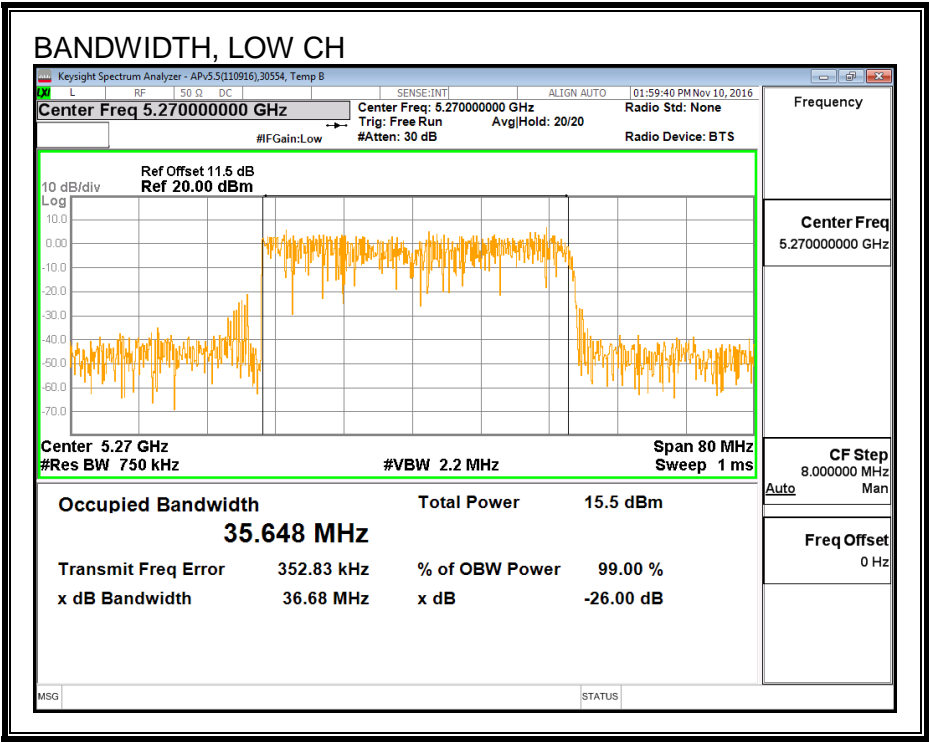

### 8.18.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5270	16.94
High	5310	14.45

#### **8.18.4. OUTPUT POWER AND PSD**

##### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	2/14/16
------------	-------	--------------	---------

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.400	35.648	2.77	24.00	11.00
High	5310	40.640	36.415	2.77	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



### Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	16.94	16.94	24.00	-7.06
High	5310	14.45	14.45	24.00	-9.55

### PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	3.032	3.13	11.00	-7.87
High	5310	2.445	2.55	11.00	-8.46

PSD

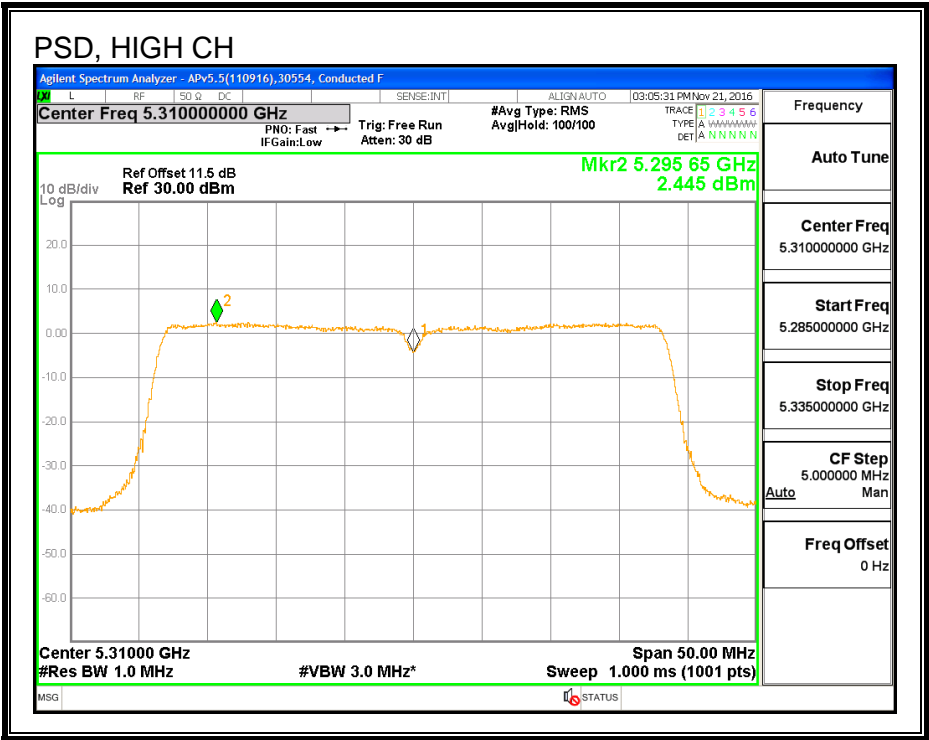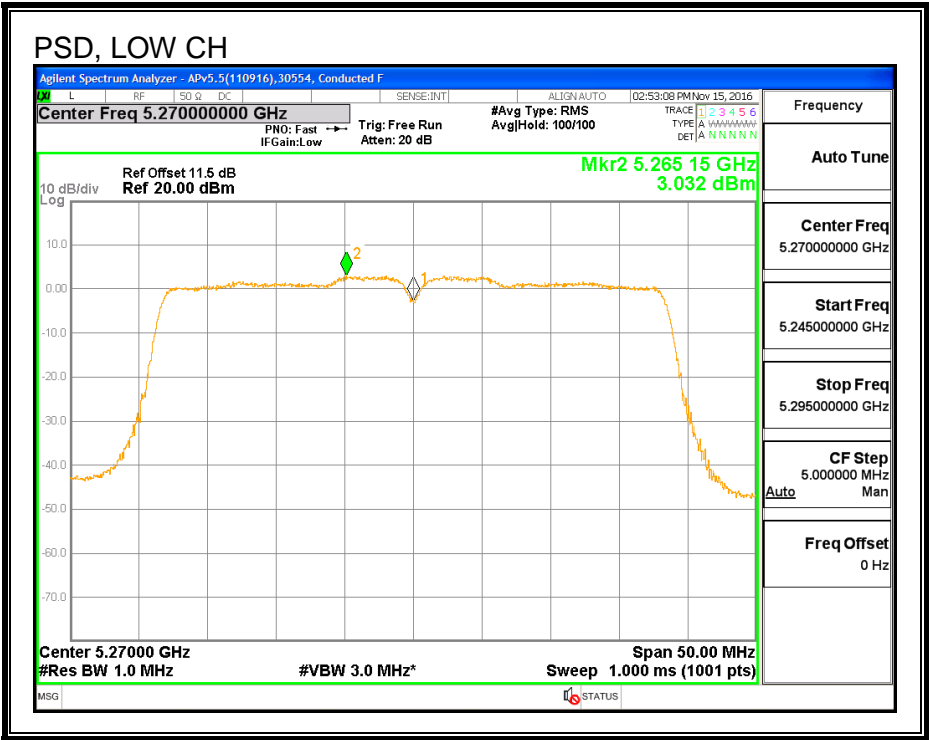

## **8.19. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND**

### **8.19.1. 26 dB BANDWIDTH**



#### **LIMITS**



None; for reporting purposes only.

#### **RESULTS**

Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Low	5270	40.640	40.320
High	5310	40.400	40.640

26 DB BANDWIDTH, ANTENNA A

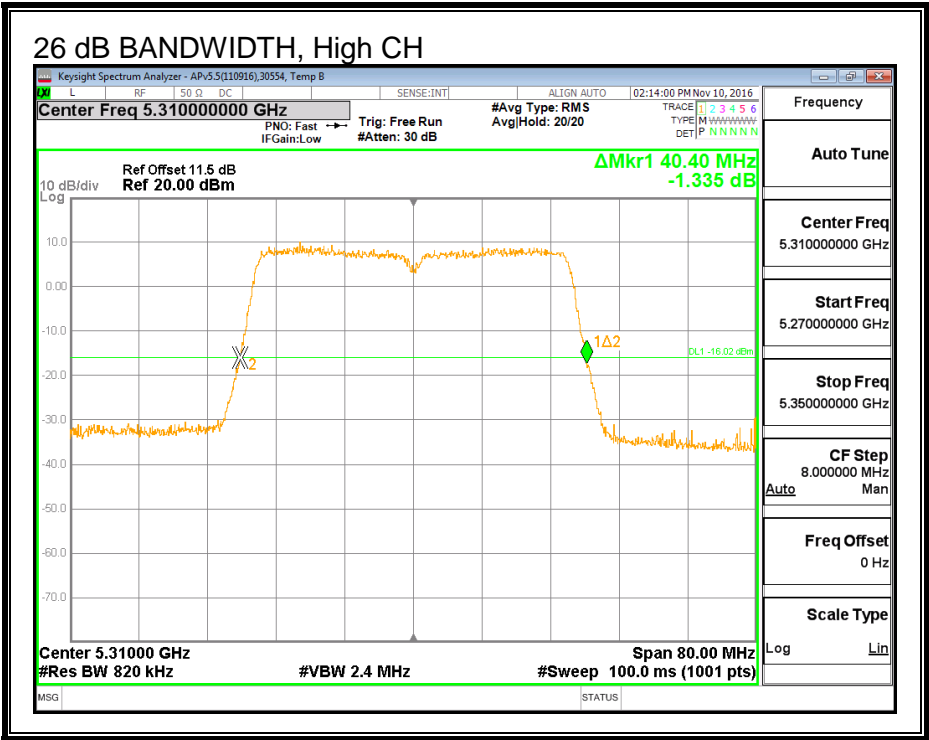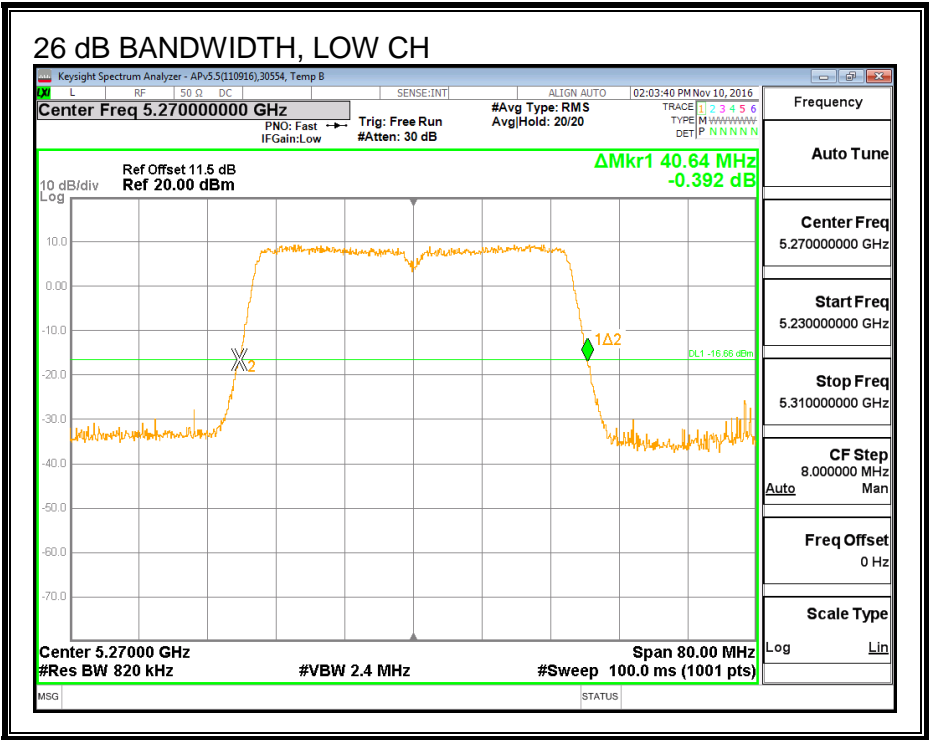

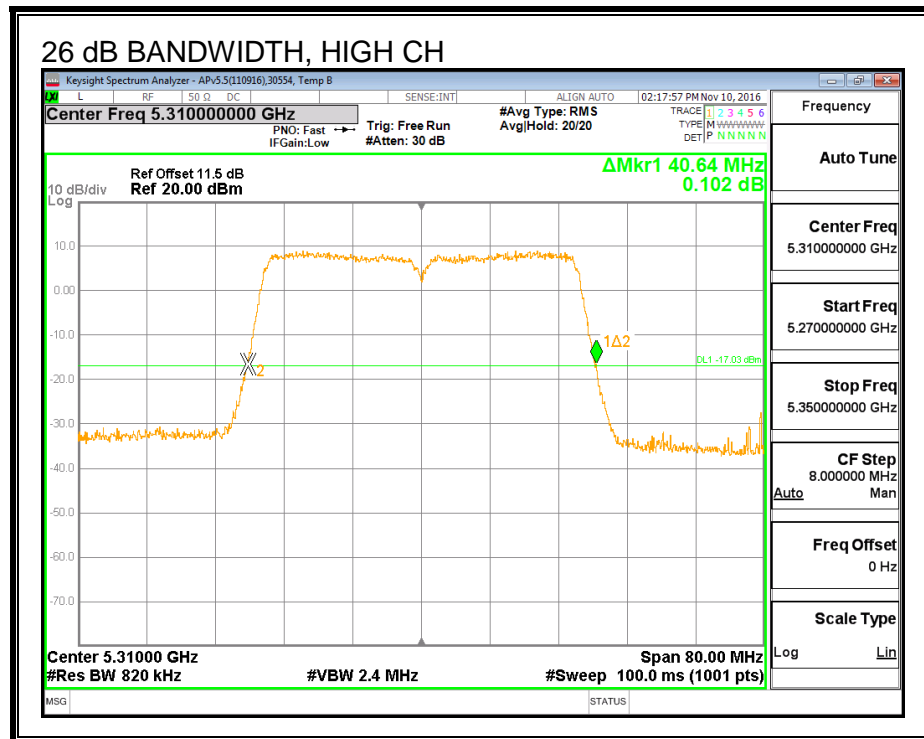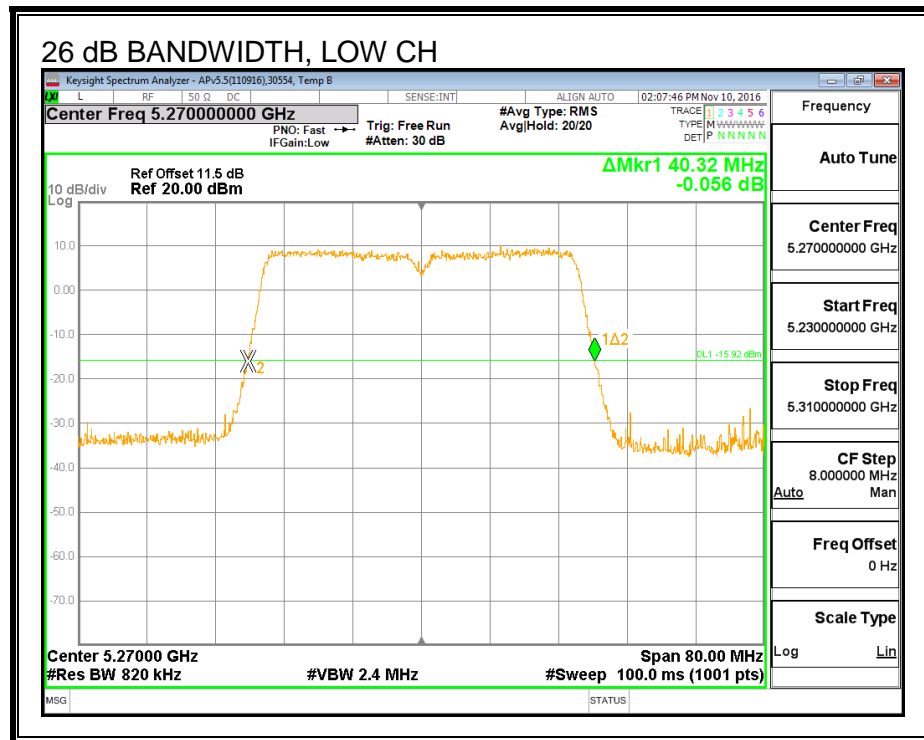

## 8.19.2. 99% BANDWIDTH



### LIMITS

None; for reporting purposes only.



### RESULTS

Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Low	5270	36.384	36.464
High	5310	36.117	36.336

99% BANDWIDTH, ANTENNA A

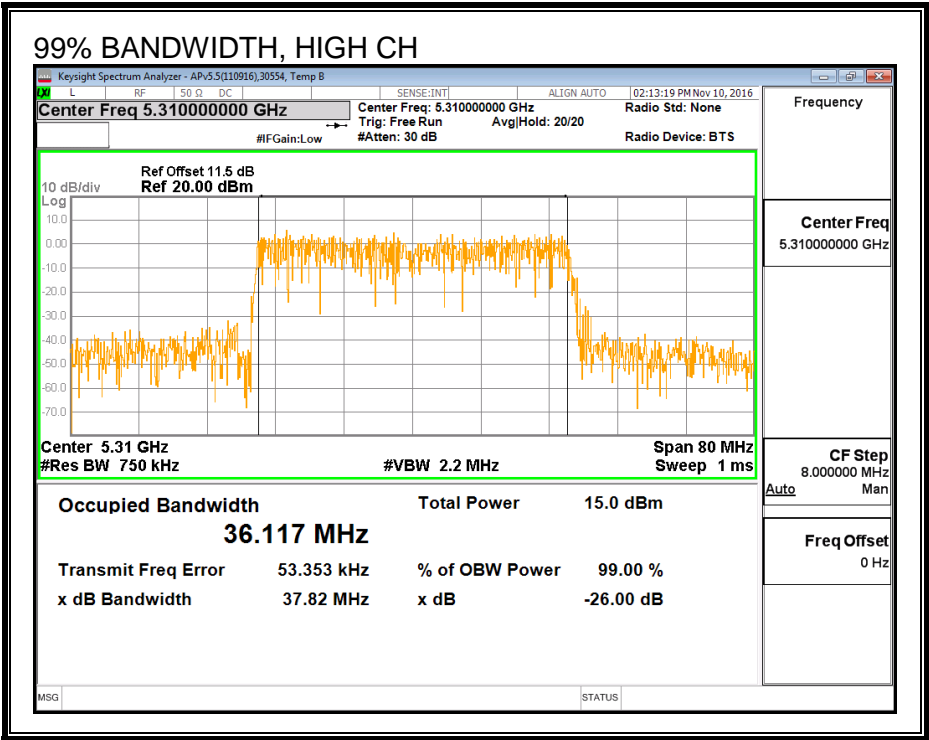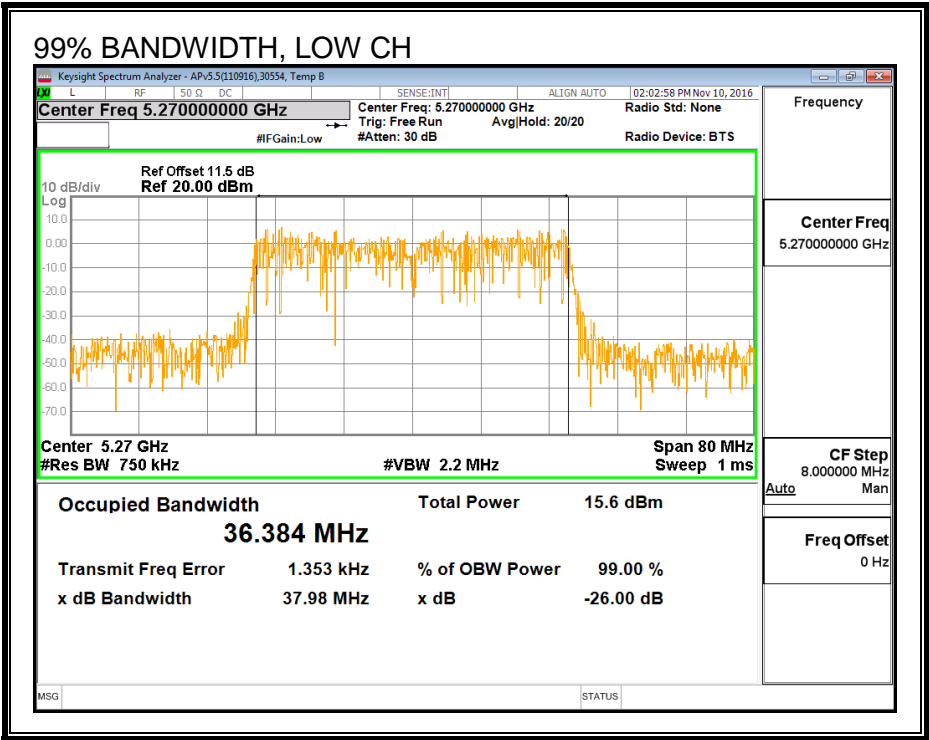

99% BANDWIDTH, ANTENNA B

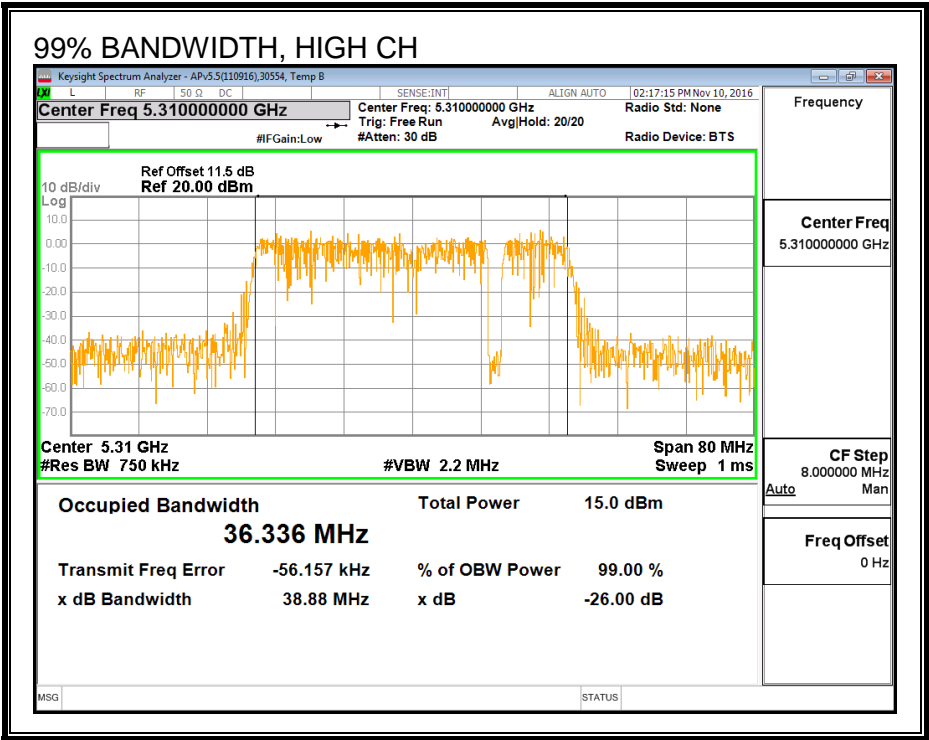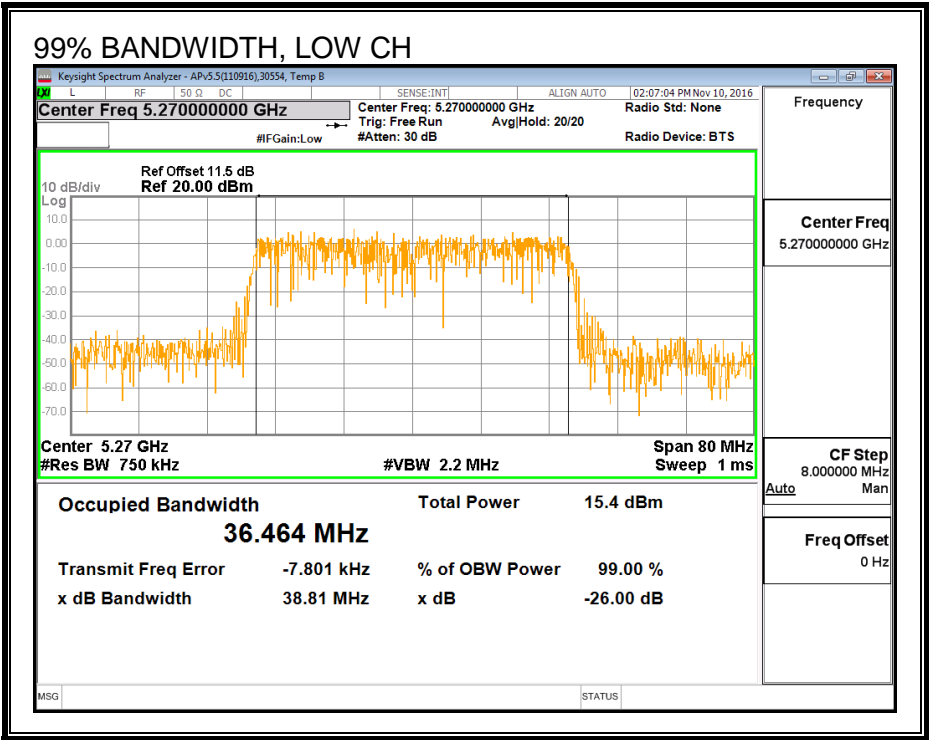

### 8.19.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39316	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

#### Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna B Power (dBm)	Total Power (dBm)
Low	5270	16.91	16.95	19.94
High	5310	13.45	13.42	16.45

#### 8.19.4. OUTPUT POWER AND PSD

##### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
2.24	2.77	2.51

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.24	2.77	5.52

## RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

### Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.32	36.384	2.51	5.52	24.00	11.00
High	5310	40.44	36.117	2.51	5.52	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	--



### Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	16.91	16.95	19.94	24.00	-4.06
High	5310	13.45	13.42	16.45	24.00	-7.55



### PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	3.07	2.98	6.14	11.00	-4.86
High	5310	2.59	2.54	5.68	11.00	-5.32

PSD, ANTENNA A

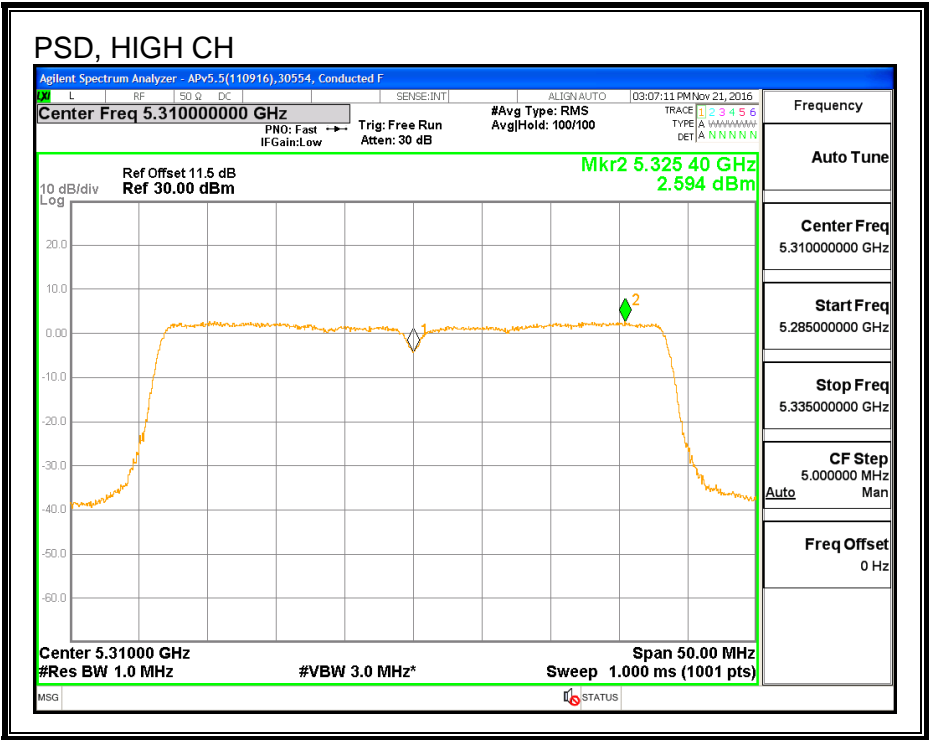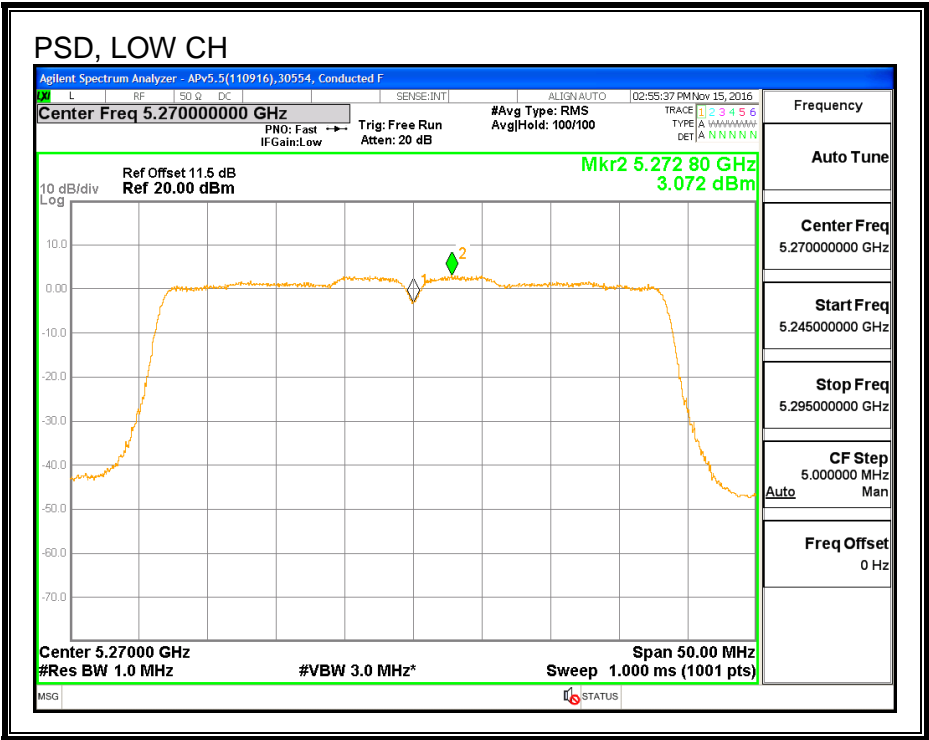

PSD, ANTENNA B

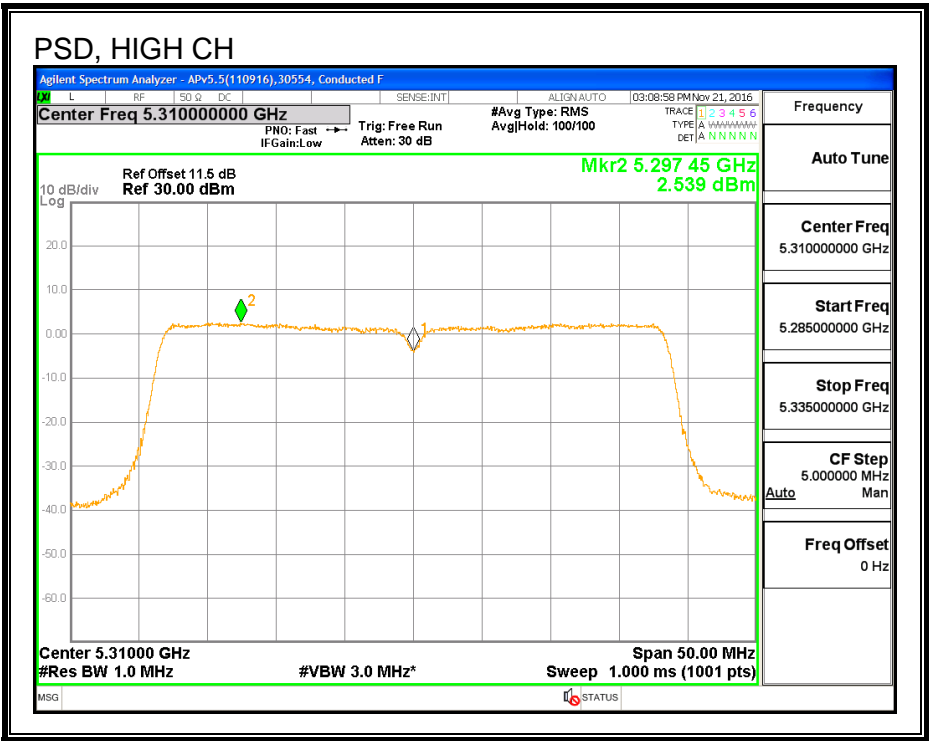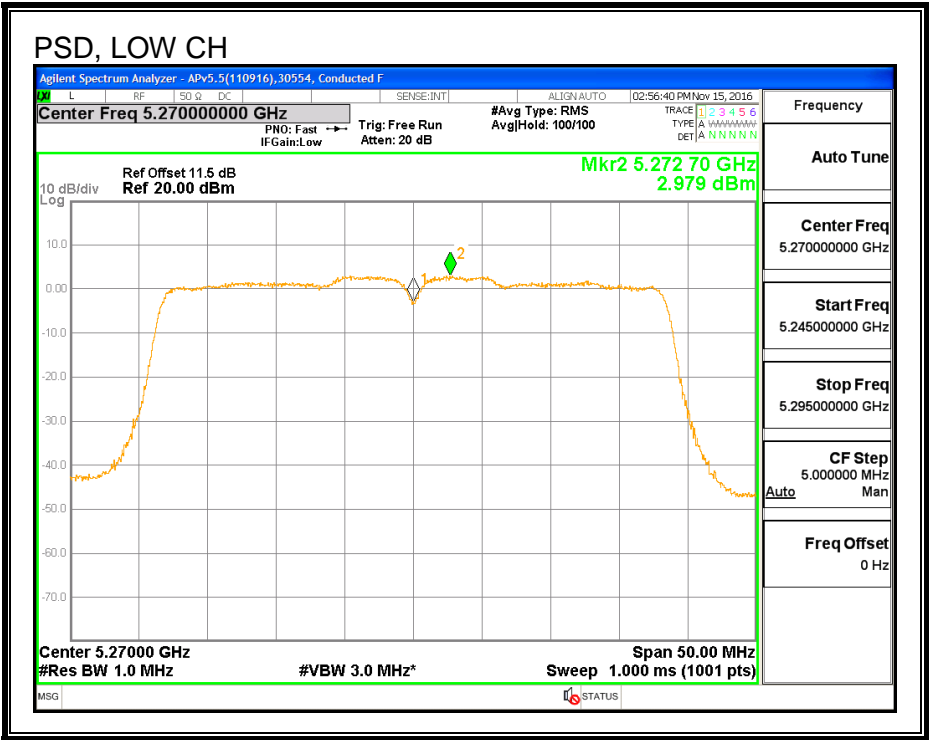

## **8.20. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND**

**Noted:** Covered by 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND

8.21. 802.11ac VHT80 ANTENNA A MODE IN THE 5.3 GHz BAND

8.21.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5290	82.560

26 dB BANDWIDTH

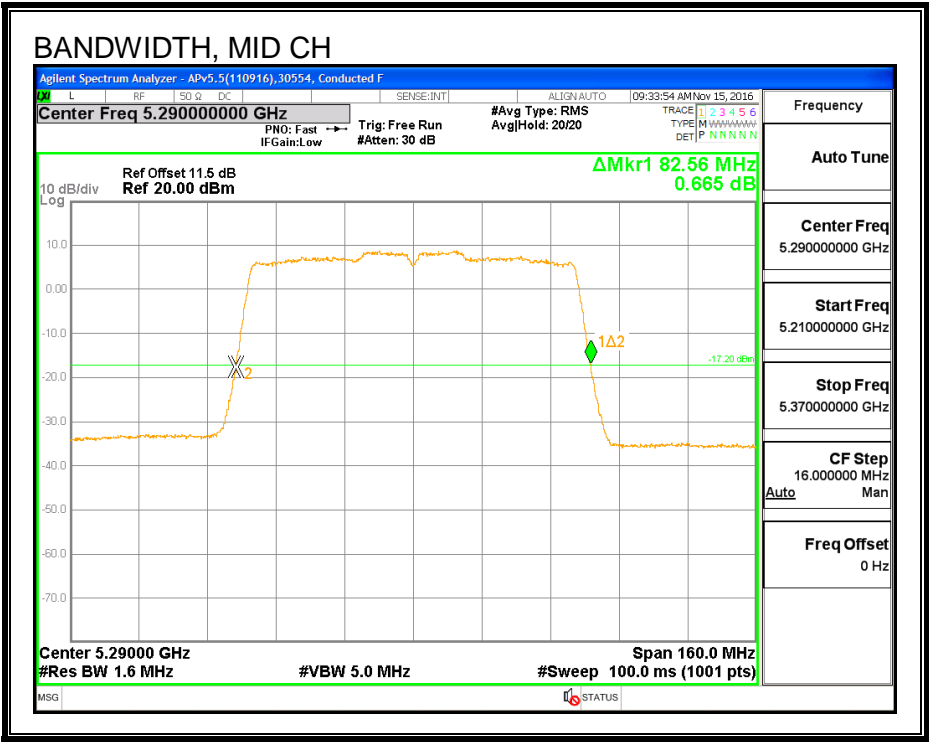

8.21.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5290	75.851

99% BANDWIDTH

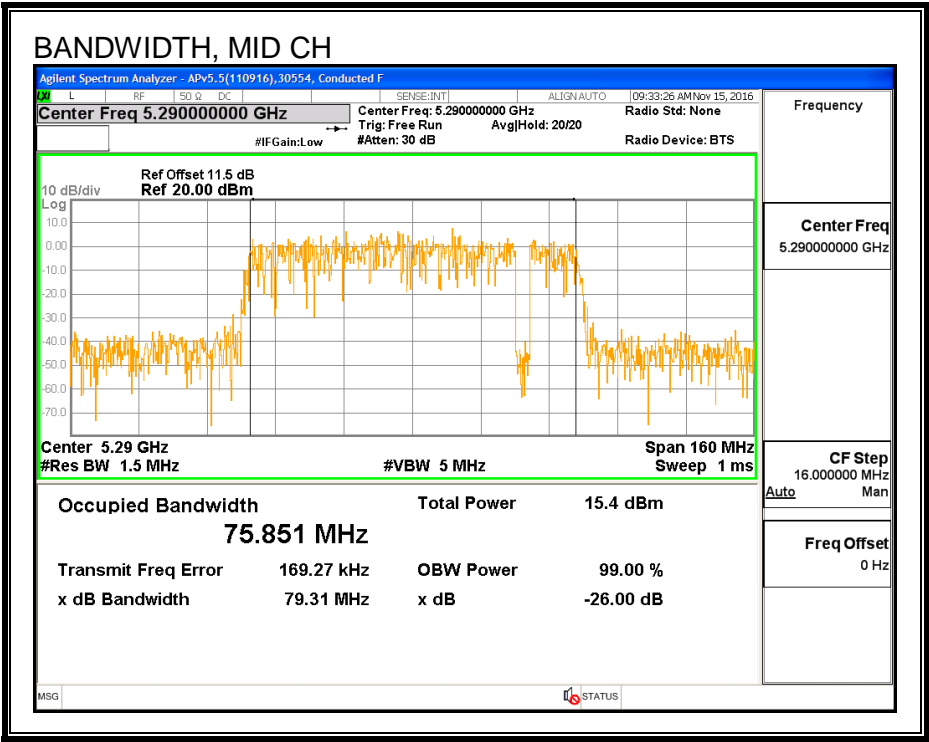

### 8.21.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

#### RESULTS

<b>ID:</b>	39472	<b>Date:</b>	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Mid	5290	12.97