


## Bluetooth Module : MB8811QD

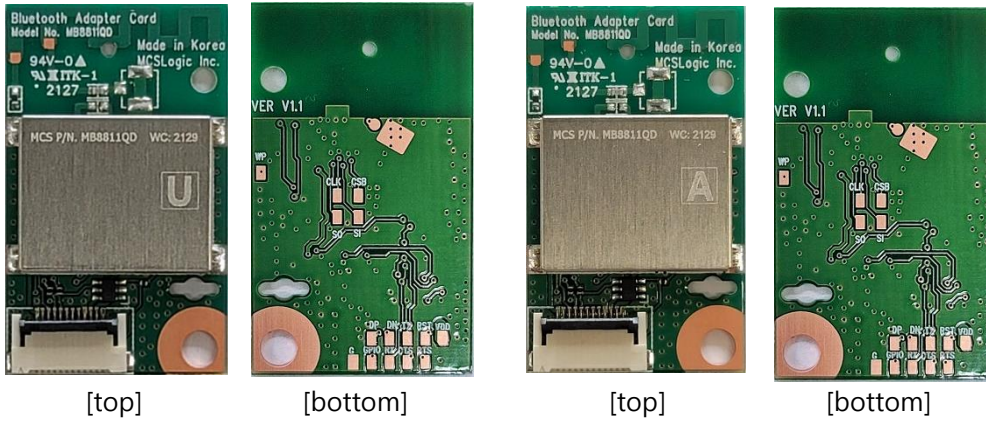


This MB8811QD Module is compatible with Bluetooth specification version 4.2. MB8811QD is a fully integrated RF, baseband controller etc.

## SPECIFICATION


Main Chips	CSR8811A12
Standards	Bluetooth 4.2
Frequency Band	2402 ~ 2480 MHz
Tx Power	0.25 ~ 10mW (Bluetooth Power Class 1)
Rx Sensitivity	< -70dBm (BER 0.1%)
Distance	< 10m (open space)
Power Voltage	3.3V
Dimension	18.6 x 31.6 x 3.4 mm
Environmental Range	Operation temperature : -25 ~ +70°C
Modulation mode	GFSK, 8DPSK
Communication method	FHSS

## Pin define(TOP PIN MAP)

No	Pin Name	I/O	Reset State	Description
1	VDD	I		Positive Input for the internal regulator (3.0 ~ 3.6V)
2				
3	RESET	I	Pull-down	Reset if low. Input debounced so must be low for >5ms to cause a reset
4	RTS	O	Pull-up	Bluetooth UART Request to Send. Active-low request.
5	CTS	I	Pull-up	Bluetooth UART Clear to Send.Active-low clear.
6	TX	O	Pull-up	Bluetooth UART Serial Output.
7	RX	I	Pull-up	Bluetooth UART Serial Input.
8	GPIO	I	Pull-down	Programmable input/output line
9	GND	-		Ground.
10	USB_DN	I/O		USB DATA MINUS
11	USB_DP	I/O		USB data plus with selectable internal 1.5k pull-up resistor
12	GND	-		Ground.

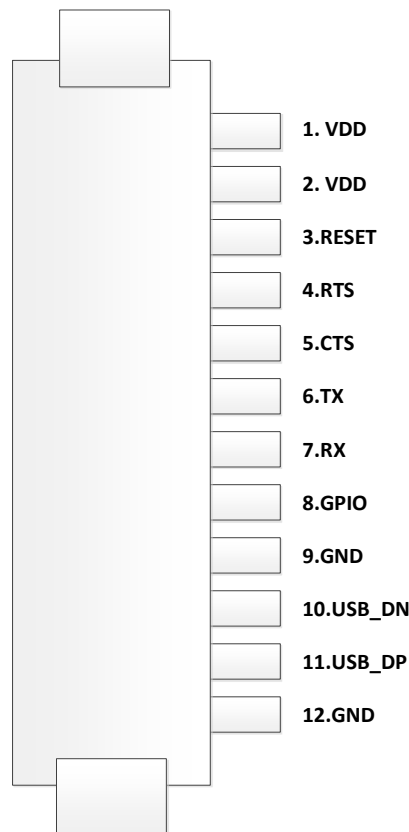

## Dimension

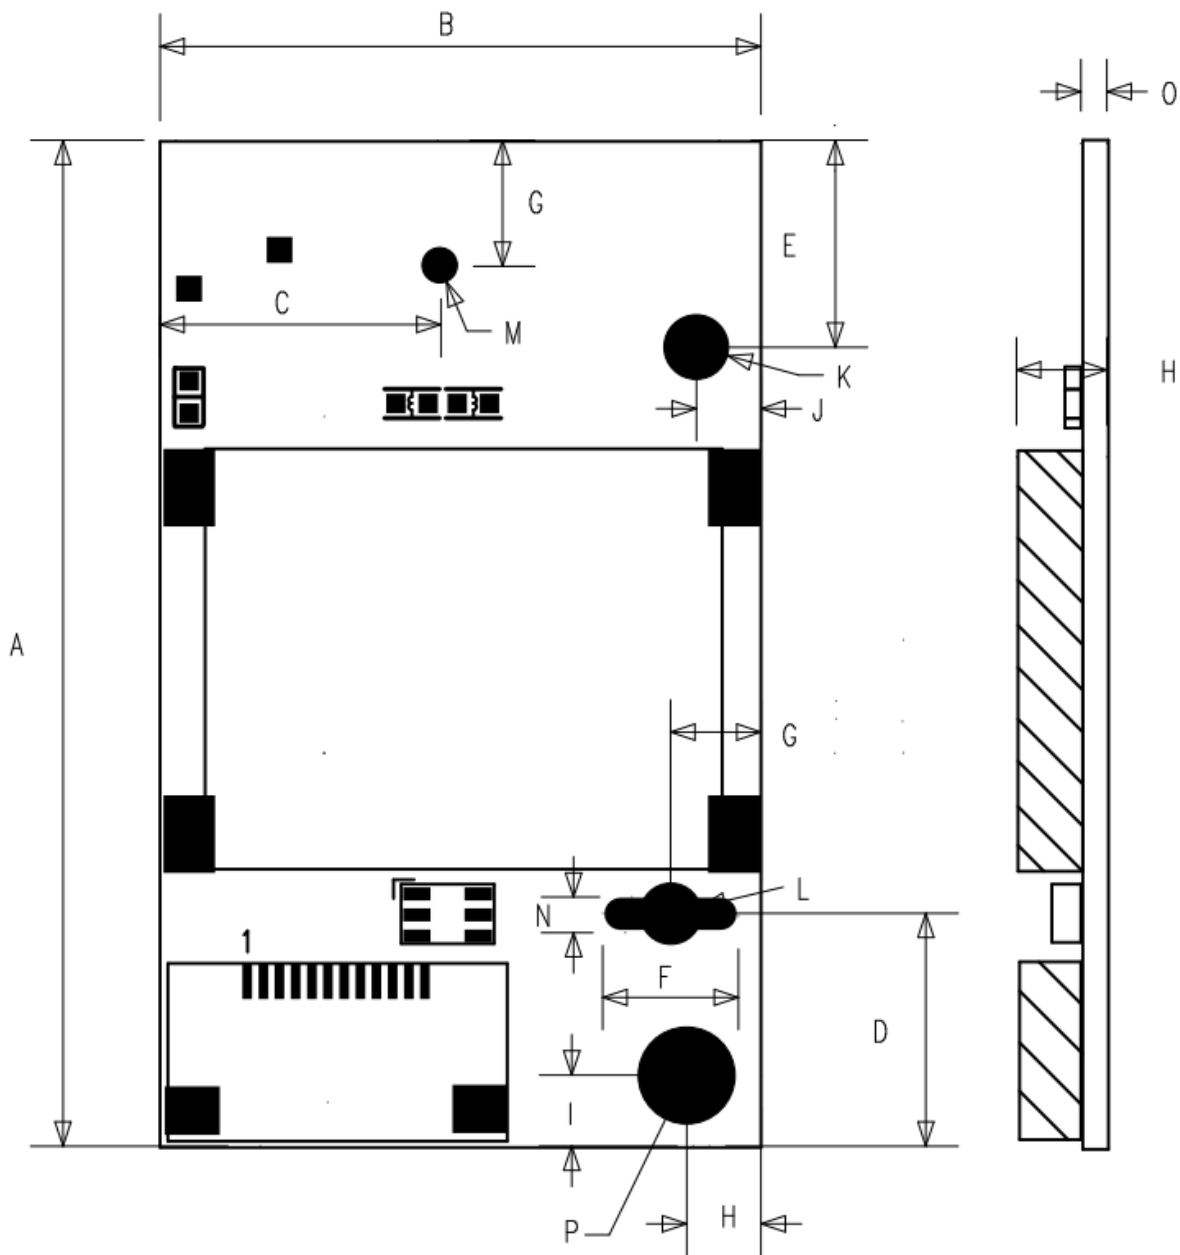

## TOP View

Mark	Dimension	Mark	Dimension	Mark	Dimension	Mark	Dimension	Mark	Dimension
A	$31.6 \pm 0.5$	D	$7.2 \pm 0.2$	G,H	$2.8 \pm 0.2$	L,	$1.9 \pm 0.2$	P	$3 \pm 0.1$
B	$18.60 \pm 0.3$	E	$6.4 \pm 0.2$	I	$2.2 \pm 0.2$	N,M	$1.1 \pm 0.2$		
C	$8.0 \pm 0.2$	F	$4.2 \pm 0.2$	J,K	$2 \pm 0.2$	O	$0.8 \pm 0.2$		

(Unit : mm)

## Electrical Characteristics

Conditions : VDD = 3.3V, Ta = 25 °C, unless otherwise noted.

### Absolute Maximum Ratings

Parameter	Min	Max	Unit
Power Supply Voltage : VDD	-0.4V	3.6V	DCV
Storage Temperature	-40	85	°C

### Recommended Operating Conditions

Parameter	Min	Max	Unit
Power Supply Voltage	3.0V	3.6V	DCV
Operation Temperature	-25	70	°C

### Current consumption

Parameter	Connection Type	Avg	Peak	Unit
Page scan, Time interval = 1.28s	-	2		mA
Inquiry and Page scan, Time interval = 1.28s	-	2	3	mA
ACL No data transfer	Master	10		mA
ACL data transfer	Master	32		mA

### Input/Output Characteristics

Parameter	Min	Max	Unit
V <sub>IL</sub> Input Voltage Low	-0.4	0.8	V
V <sub>IH</sub> Input Voltage High	0.7*VDD	VDD+0.4	V
V <sub>OL</sub> Output Voltage Low	-	0.2	V
V <sub>OH</sub> Output Voltage High	VDD-0.2	-	V

<b>General Performance</b>					
<b>Parameter</b>	<b>Condition</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Frequency Range	Normal	2402	-	2480	MHz

<b>Transmitter Performance</b>					
<b>Parameter</b>	<b>Condition</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Transmit Power	Normal	-6	0	8	dBm
Power density	Normal	-	-	20	dBm
20dB bandwidth	Normal			1000	KHz
Adjacent channel power ( $F_0 = 2441\text{MHz}$ )	$F = F_0 \pm 2\text{MHz}$	-	-	-20	dBm
	$F = F_0 \pm 3\text{MHz}$	-	-	-40	dBm
	$F = F_0 \pm 4\text{MHz}$	-	-	-40	dBm
Out-band Spurious Emission	30MHz ~ 1GHz	-	-	-36	dBm
	1GHz ~ 12.75GHz	-	-	-30	dBm
	1.8GHz ~ 1.9GHz	-	-	-47	dBm
	5.1GHz ~ 5.3GHz	-	-	-47	dBm
Modulation Characteristic	$\Delta F_{1\text{avg}}$	140	-	175	KHz
	$\Delta F_{2\text{max}}$	115	-	-	KHz
	$\Delta F_{2\text{avg}} / \Delta F_{1\text{avg}}$	80	-	-	%
Initial Carrier Frequency Tolerance	DH1 packet	-75	-	75	KHz
Carrier Frequency Drift	DH5 packet	-25		25	KHz

<b>Receiver Performance</b>					
<b>Parameter</b>	<b>Condition</b>	<b>Min</b>	<b>Type</b>	<b>Max</b>	<b>Unit</b>
Sensitivity at 0.1% BER	Single slot (DH1 packet)	-	-	-70	dBm
Sensitivity at 0.1% BER	Multi slot (DH5 packet)	-	-	-70	dBm
Maximum received signal at 0.1% BER		-20	-	-	dBm
Maximum level of intermodulation interferers	$f_1 - f_2 = 5\text{ MHz}$ , $P_{\text{wanted}} = -64\text{ dBm}$	-39	-	-	dBm

## MB8811QD Test Manual

### 1) RF Test Utility

First time, CSR Bluesuite program must be installed. you can use BTcli.exe and enter DUT(Device Under Test) mode. So RF equipment can inquiry and test. (reference document.)

\* reference document : MB8811QD\_JIG\_DUT\_BLE\_MANUAL\_USB.pdf

### 2) RF Test method

RF Test tool is BlueTest.exe at CSR bluesuite program. You can see detail explanation from reference document.

\* reference document : BlueTest Instruction Manual.pdf

Conformity Assessment Display

Company name: LG Electronics Inc.

Model : Specific micro-power wireless devices (wireless data communication system devices)  
(MB8811QD)

Manufacture Year : 2021. .

Manufacturer / Manufacture Country : LG Electronics Inc./ Korea



## **FCC MODULAR APPROVAL INFORMATION**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator

### **OEM INTEGRATION INSTRUCTIONS:**

This device is intended only for OEM integrators under the following conditions:

The transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the internal on-board antenna that has been originally tested and certified with this module. External antennas are not supported. As long as these 3 conditions above are met, further transmitter test will not be required.

However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.). The end-product may need Verification testing, Declaration of Conformity testing, a Permissive Class II Change or new Certification. Please involve a FCC certification specialist in order to determine what will be exactly applicable for the end-product.

### **Validity of using the module certification:**

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. In such cases, please involve a FCC certification specialist in order to determine if a Permissive Class II Change or new Certification is required.

**Upgrade Firmware:**

The software provided for firmware upgrade will not be capable to affect any RF parameters as certified for the FCC for this module, in order to prevent compliance issues.

**End product labeling:**

The host system using this module, should have label in a visible area indicated the following texts:  
"Contains FCC ID: BEJ-MB8811QD.

**Information that must be placed in the end user manual:**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.



## Requirement per KDB996369 D03

### 2.2 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.<sup>3</sup>

**Explanation:** This module meets the requirements of FCC part 15C (15.247)

### 2.3 Summarize the specific operational use conditions

Describe use conditions that are applicable to the modular transmitter, including for example any limits on antennas, etc. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, then this information must be in the instructions. If the use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer's instruction manual. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.

**Explanation:** The EUT has a PCB Antenna, and the antenna use a permanently attached antenna which is not replaceable.

### 2.4 Limited module procedures

If a modular transmitter is approved as a "limited module," then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions. A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval.

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of the product into which the modular transmitter will be installed will be maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

**Explanation:** The module is not a limited module.

## 2.5 Trace antenna designs

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ - Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects:

layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.

- a) Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);
- b) Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- c) The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
- d) Appropriate parts by manufacturer and specifications;
- e) Test procedures for design verification; and
- f) Production test procedures for ensuring compliance.

The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

**Explanation:** Yes, The module with trace antenna designs, and This manual has been shown the layout of trace design, antenna, connectors, and isolation requirements.

## 2.6 RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable - xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

**Explanation:** This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment, This equipment should be installed and operated with a minimum distance of 20 Cm between the radiator. This module is designed to comply with the FCC statement, FCC ID is: BEJ-MB8811QD.

## 2.7 Antennas

A list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an “omni-directional antenna” is not considered to be a specific “antenna type” )).

For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product. The module manufacturers shall provide a list of acceptable unique connectors.

**Explanation:** The EUT has a PCB Antenna, and the antenna use a permanently attached antenna which is unique.

## 2.8 Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This includes advising host product manufacturers that they need to provide a physical or e-label stating “Contains FCC ID” with their finished product. See Guidelines for Labeling and User Information for RF Devices - KDB Publication 784748.

**Explanation:** The host system using this module, should have label in a visible area indicated the following texts: "Contains FCC ID: BEJ-MB8811QD.

## 2.9 Information on test modes and additional testing requirements

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide. Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterizes a connection by enabling a transmitter. This can greatly simplify a host manufacturer's determination that a module as installed in a host complies with FCC requirements.

**Explanation:** Top band can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

## 2.10 Additional testing, Part 15 Subpart B disclaimer

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

**Explanation:** The module without unintentional-radiator digital circuitry, so the module does not require an evaluation by FCC Part 15 Subpart B. The host should be evaluated by the FCC Subpart B.

IC Information (IC: 2703H-MB8811QD, HVIN: MB8811QD)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec Industrie Canada exempts de licence standard RSS (s).

L'opération est soumise aux deux conditions suivantes:

- (1) cet appareil ne peut causer d'interférences, et
- (2) cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil.

The end product must be labeled to display the Industry Canada certification number of the module. Contains transmitter module IC: 2703H-MB8811QD

Le dispositif d'accueil doivent être étiquetés pour afficher le numéro de certification d'Industrie Canada du module.

Contient module émetteur IC : 2703H-MB8811QD

## Product Description

Device Type	Bluetooth Adapter Card	
Operating Frequency	2 402 MHz ~ 2 480 MHz	
RF Output Power	Bluetooth	7.46 dBm
	Bluetooth LE	7.49 dBm
Number of Channel	Bluetooth	79 Channels
	Bluetooth LE	40 Channels
Modulation Type	Bluetooth	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps
	Bluetooth LE	GFSK
Antenna Type	PCB Antenna	
Antenna Gain	1.19 dBi	
Rated Supply Voltage	DC 3.3 V	
List of each Osc. or crystal Freq.(Freq. $\geq$ 1 MHz)	26 MHz	