





FCC Test Report

Report No.: AGC15798230766FE03

FCC ID : 2A56CDRC18

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: 2.4G Unmanned drone

BRAND NAME : N/A

MODEL NAME : DRC188

APPLICANT: WINTIDE BRAND LIMITED

DATE OF ISSUE : Aug. 02, 2023

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Globas Compliance (Shenzhen) Co., Ltd



Report No.: AGC15798230766FE03

Page 2 of 32

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 02, 2023	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
6. TEST FACILITY	11
7. RADIATED EMISSION	12
7.1. TEST LIMIT	13 15
8. BAND EDGE EMISSION	22
8.1. MEASUREMENT PROCEDURE	22
9. 20DB BANDWIDTH	27
9.1. MEASUREMENT PROCEDURE	27
10. FCC LINE CONDUCTED EMISSION TEST	30
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	30



Report No.: AGC15798230766FE03 Page 4 of 32

10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	31
10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	31
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	32
APPENDIX B: PHOTOGRAPHS OF THE EUT	32






1. VERIFICATION OF CONFORMITY

Applicant	WINTIDE BRAND LIMITED
Address	4/F, NO.1, Donghuang Building, NO.2 Fengxing Road, Chenghai District, Shantou City, Guangdong, China
Manufacturer	WINTIDE BRAND LIMITED
Address	4/F, NO.1, Donghuang Building, NO.2 Fengxing Road, Chenghai District, Shantou City, Guangdong, China
Factory	WINTIDE BRAND LIMITED
Address	4/F, NO.1, Donghuang Building, NO.2 Fengxing Road, Chenghai District, Shantou City, Guangdong, China
Product Designation	2.4G Unmanned drone
Brand Name	N/A
Test Model	DRC188
Date of receipt of test item	Jul. 19, 2023
Date of test	Jul. 19, 2023 to Aug. 01, 2023
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-SRD/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By	Ay Zhou	
	Sky Zhou (Project Engineer)	Aug. 02, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Aug. 02, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Aug. 02, 2023





2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following


Attriager toorningar accomplished of Eo F to accompany accomplished as following		
Operation Frequency	2405MHz-2475MHz	
Maximum field strength	90.74dBµV/m(Peak)@3m	
Maximum neid Strength	80.25dBµV/m(Average)@3m	
Modulation	GFSK	
Number of channels	71 Channels	
Antenna Gain	0dBi	
Antenna Designation	Wire Antenna	
Hardware Version	WF-X11 V1.1	
Software Version	WF-X11 V1.1	
Power Supply	DC 4.5V by battery	

2.2. TABLE OF CARRIER FREQUENCY

Channel Number	Frequency (MHZ)	Channel Number	Frequency (MHZ)
01	2405	37	2441
02	2406	38	2442
03	2407	39	2443
04	2408	40	2444
05	2409	41	2445
06	2410	42	2446
07	2411	43	2447
08	2412	44	2448
09	2413	45	2449
10	2414	46	2450
11	2415	47	2451
12	2416	48	2452
13	2417	49	2453
14	2418	50	2454
15	2419	51	2455
16	2420	52	2456
17	2421	53	2457
18	2422	54	2458
19	2423	55	2459
20	2424	56	2460

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





21	2425	57	2461
22	2426	58	2462
23	2427	59	2463
24	2428	60	2464
25	2429	61	2465
26	2430	62	2466
27	2431	63	2467
28	2432	64	2468
29	2433	65	2469
30	2434	66	2470
31	2435	67	2471
32	2436	68	2472
33	2437	69	2473
34	2438	70	2474
35	2439	71	2475
36	2440		

2.3. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Report No.: AGC15798230766FE03

Page 8 of 32

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±2.9 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %



Report No.: AGC15798230766FE03 Page 9 of 32

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_2405MHz_GFSK
2	Middle channel TX_2445MHz_GFSK
3	High channel TX_2475MHz_GFSK

Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Set the EUT into the individual test modes by pressing the EUT buttons.
- 4. For battery operated equipment, the equipment tests are performed using a new battery.



Report No.: AGC15798230766FE03

Page 10 of 32

5. SYSTEM TEST CONFIGURATION 5.1. CONFIGURATION OF EUT SYSTEM

Configure:

EUT	


5.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	2.4G Unmanned drone	DRC188	2A56CDRC18	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Not applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
Signal Analyzer	Aglient	N9020A	MY52090123	Jun. 03, 2023	Jun. 02, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	N/A	N/A	Jun. 01, 2023	May 31, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Horn Antenna	ETS	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Pre-amplifier	ETS	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2024
Test Software	Tonscend	4.0.0.0	N/A	N/A	N/A



Report No.: AGC15798230766FE03

Page 12 of 32

7. RADIATED EMISSION

7.1. TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit			
(MHz)	Meters	μ V/m	dB(μV)/m		
0.009 ~ 0.490	300	2400/F(kHz)			
0.490 ~ 1.705	30	24000/F(kHz)			
1.705 ~ 30	30	30			
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3	200	46.0		
960 ~ 1000	3	500	54.0		
Above 1000	3	Other:74.0 dB(µV)/m (Pea	k) 54.0 dB(μV)/m (Average)		

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Report No.: AGC15798230766FE03 Page 13 of 32

7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC15798230766FE03

Page 14 of 32

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
	1GHz~26.5GHz
Start ~Stop Frequency	RBW 2.4MHz/ VBW 8MHz for Peak,
	RBW 2.4MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

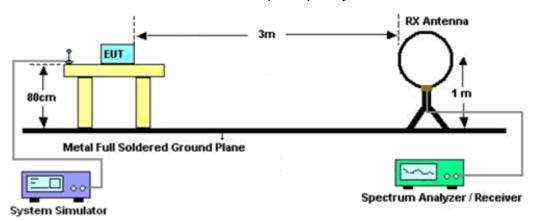

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

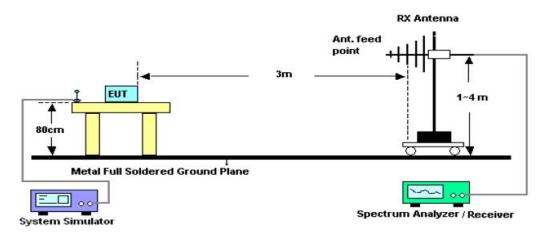

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

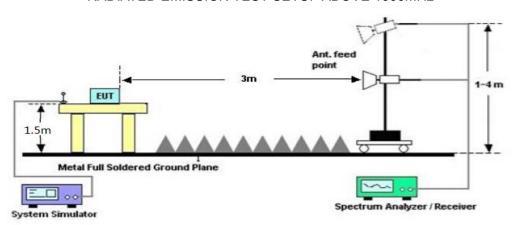

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION 30MHz-1GHZ

EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Horizontal

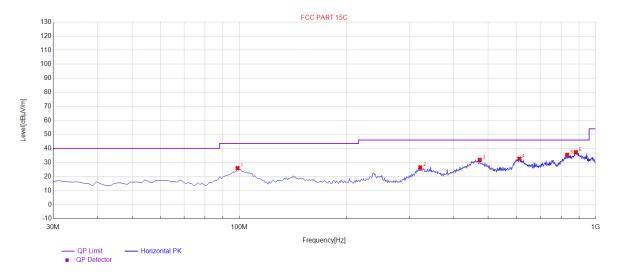


NO	Freq.	Level	Factor	Limit	Margin	Height	Angle	Delevitor
NO.	[MHz]	[dBuV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	98.87	26.00	20.81	43.50	17.50	100	40	Horizontal
2	321.97	26.53	21.28	46.00	19.47	100	150	Horizontal
3	473.29	31.85	26.38	46.00	14.15	100	290	Horizontal
4	611.03	32.71	28.31	46.00	13.29	100	180	Horizontal
5	832.19	35.45	30.35	46.00	10.55	100	220	Horizontal
6	880.69	37.35	33.22	46.00	8.65	100	320	Horizontal

RESULT: PASS



EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Vertical

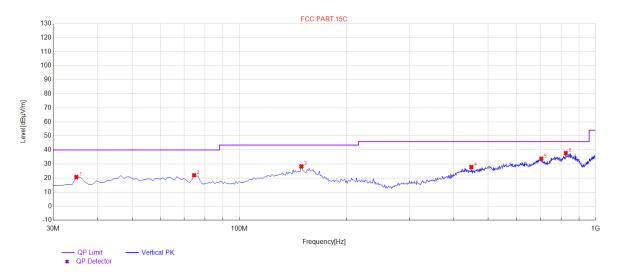

NO	Freq.	Level	Factor	Limit	Margin	Height	Angle	Delegio
NO.	[MHz]	[dBµV/m]	[dB]	[dBuV/m]	[dB]	[cm]	[°]	Polarity
1	34.85	20.76	10.75	40.00	19.24	100	200	Vertical
2	74.62	22.02	12.89	40.00	17.98	100	130	Vertical
3	149.31	28.31	20.81	43.50	15.19	100	320	Vertical
4	448.07	27.88	21.71	46.00	18.12	100	220	Vertical
5	704.15	33.81	28.72	46.00	12.19	100	190	Vertical
6	825.4	37.81	31.83	46.00	8.19	100	20	Vertical

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The mode 1 is the worst case and recorded in the report.




FIELD STRENGTH OF FUNDAMENTAL

EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	22°C	Relative Humidity	56%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
2405	41.69	49.05	90.74	114.00	-23.26	peak
2405	31.20	49.05	80.25	94.00	-13.75	AVG
2445	40.34	49.12	89.46	114.00	-24.54	peak
2445	29.21	49.12	78.33	94.00	-15.67	AVG
2475	39.03	49.25	88.28	114.00	-25.72	peak
2475	28.36	49.25	77.61	94.00	-16.39	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	22°C	Relative Humidity	56%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2405	44.37	49.05	80.78	114.00	-33.22	peak	
2405	29.51	49.05	70.57	94.00	-23.43	AVG	
2445	45.31	49.12	80.46	114.00	-33.54	peak	
2445	30.11	49.12	70.37	94.00	-23.63	AVG	
2475	40.78	49.25	80.94	114.00	-33.06	peak	
2475	30.48	49.25	70.71	94.00	-23.29	AVG	
Remark:							
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





RADIATED EMISSION ABOVE 1GHZ


EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4810	49.36	3.76	53.12	74.00	-20.88	peak	
4810	38.27	3.76	42.03	54.00	-11.97	AVG	
7215	45.85	8.17	54.02	74.00	-19.98	peak	
7215 36.07 8.17 44.24 54.00 -9.76 AVG							
Remark:							
actor = Antenna Factor + Cable Loss - Pre-amplifier							

	⊢actor	= An	tenna	Fact	or +	Cable	Loss	− F	re-amp	litier.
_										

EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4810	48.52	3.76	52.28	74.00	-21.72	peak		
4810	37.91	3.76	41.67	54.00	-12.33	AVG		
7215	45.82	8.17	53.99	74.00	-20.01	peak		
7215	7215 35.31 8.17 43.48 54.00 -10.52 AVG							
Remark:								
Factor = Anten	Factor = Antenna Factor + Cable Loss - Pre-amplifier.							






EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tine		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4890	50.43	3.78	54.21	74.00	-19.79	peak		
4890	39.21	3.78	42.99	54.00	-11.01	AVG		
7335	47.15	8.23	55.38	74.00	-18.62	peak		
7335	7335 38.26 8.23 46.49 54.00 -7.51 AVG							
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4890	48.63	3.78	52.41	74.00	-21.59	peak		
4890	37.15	3.78	40.93	54.00	-13.07	AVG		
7335	45.71	8.23	53.94	74.00	-20.06	peak		
7335	7335 34.89 8.23 43.12 54.00 -10.88 AVG							
Remark:	Remark:							
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							





EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tine			
(MHz)	(dBµV)	(dB)	(dBµV/m) (dBµV/m)		(dB)	Value Type			
4950	50.76	3.81	54.57	74.00	-19.43	peak			
4950	39.54	3.81	43.35	54.00	-10.65	AVG			
7425	47.64	8.27	55.91	74.00	-18.09	peak			
7425	36.97	8.27	45.24	54.00	-8.76	AVG			
Remark:									
Factor = Anten	na Factor + Cabl	le Loss – Pre-a	mplifier.						

EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	24.1°C	Relative Humidity	59.5%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Vertical


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	lB) (dBμV/m) (dE		(dB)	Value Type			
4950	48.56	3.81	52.37	74.00	-21.63	peak			
4950	37.64	3.81	41.45	54.00	-12.55	AVG			
7425	46.02	8.27	54.29	74.00	-19.71	peak			
7425	35.47	8.27	43.74	54.00	-10.26	AVG			
Remark:									
Factor = Anter	na Factor + Cab	le Loss – Pre-a	mplifier.						

RESULT: PASS

Note: The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.






8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz; VBW=3MHz / Sweep=AUTO
- 3. Other procedures refer to clause 7.2.

8.2. TEST SETUP

RADIATED EMISSION TEST SETUP

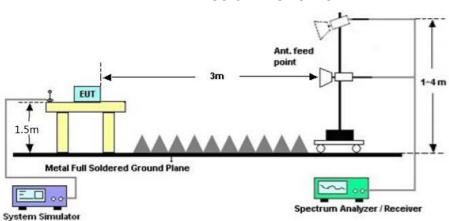


8.3 RADIATED TEST RESULT

Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.




EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	22°C	Relative Humidity	56%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Horizontal

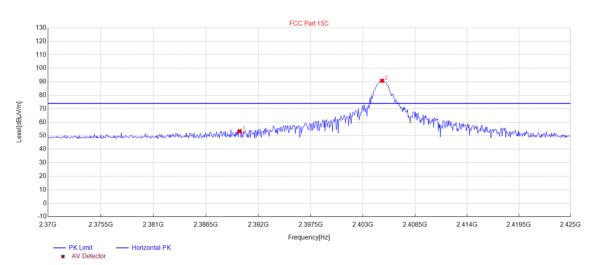

	NO.	Freq [MHz].	Level [dBµV/m]	Factor⊸ [dB]⊸	Limit⊬ [dBµV/m]⊬	Margin⊭ [dB]⊭	Height [cm]	Angle [°]	Polarity _e
Ī	1₽	2390.04	53.35₽	33.57₽	74.00₽	20.65₽	150₽	44.∘	Horizontal₀
	2₽	2405.015	90.74	33.64₽	74.00₽	-16.74∂	150₽	234₽	Horizontal ₋


Average Value

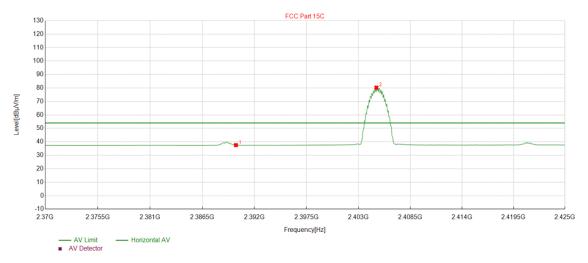

NO.	Freq [MHz].	Level [dBµV/m]	Factor⊸ [dB]ℯ	Limit⊬ [dBµV/m]⊬	Margin∞ [dB]∞	Height⊿ [cm]₂	Angle. [°].	Polarity∍
1₽	2390.04	37.58	33.57₽	54.00₽	16.42₽	150₽	268₽	Horizontal _°
2₽	2404.904	80.25	33.64₽	54.00₽	-26.25₽	150₽	227₽	Horizontal₄




EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	22°C	Relative Humidity	56%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Vertical

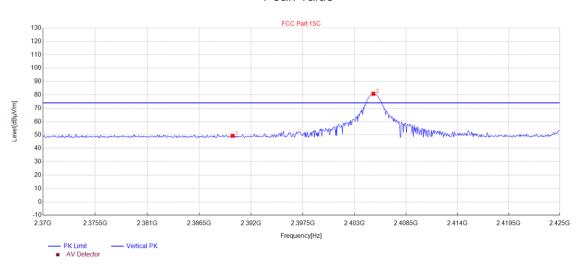

NO.	Freq [MHz].	Level [dBµV/m]	Factor⊸ [dB] _∛	Limit⊬ [dBµV/m]∉	Margin [dB]	Height∍ [cm] _ĕ	Angle. [°].	Polarity∍
1₽	2390.04	49.43	33.57₽	74.00	24.57	150-	200.	Vertical _ĕ
2₽	2405.015	80.78	33.64	74.00₽	-6.78	150₽	353₽	Vertical₄


Average Value

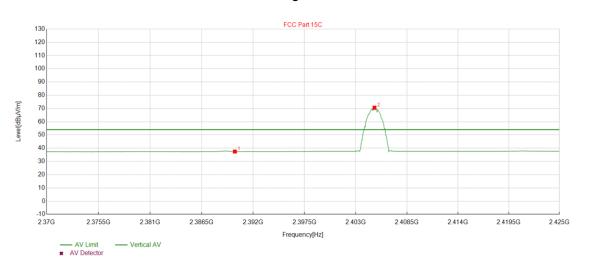

NO.	Freq [MHz].	Level [dBµV/m]	Factor⊸ [dB]∉	Limit. [dBµV/m]。	Margin∍ [dB]∍	Height⊬ [cm]⊬	Angle.	Polarity
1.₀	2390.04	37.44	33.57₽	54.00₽	16.56₽	150₽	286	Vertical₄
2₽	2405.015	70.57₽	33.64	54.00₽	-16.57₽	150₽	360₽	Vertical _∘




EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	22°C	Relative Humidity	56%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Horizontal

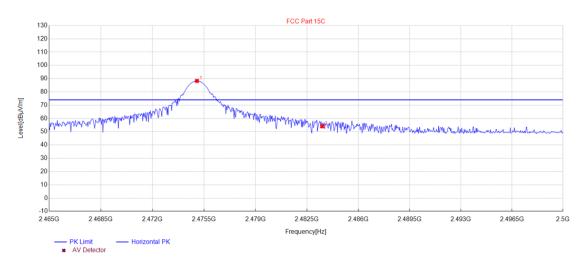

NO.	Freq [MHz].	Level- [dBµV/m]-	Factor⊸ [dB]⊬	Limit⊬ [dBµV/m]⊬	Margin [dB]∍	Height∞ [cm] _e	Angle. [°].	Polarity∉
1₽	2475.02	88.28	33.97	74.00	-14.28	150₽	229	Horizontal∍
2₽	2483.533	54.08	34.00	74.00₽	19.92₽	150₽	356₽	Horizontal _e


Average Value

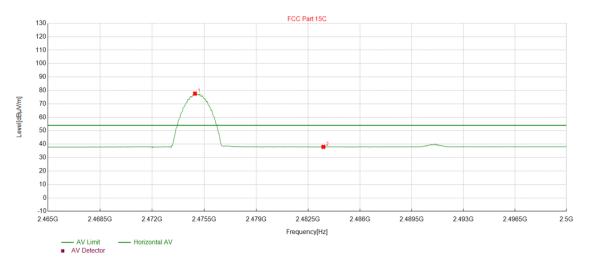

NO.	Freq [MHz].	Level [dBµV/m]	Factor	Limit. [dBµV/m].	Margin. [dB].	Height	Angle.	Polarity∍
1₽	2474.879	77.61	33.96	54.00	-23.61 _e	150.	223.	Horizontal.
2₽	2483.533	37.97₽	34.00	54.00₽	16.03	150₽	359₽	Horizontal _e




EUT	2.4G Unmanned drone	Model Name	DRC188
Temperature	22°C	Relative Humidity	56%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Vertical

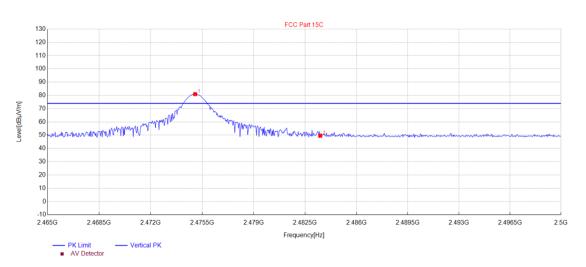

NO.	Freq [MHz].	Level. [dBµV/m].	Factor⊸ [dB]∉	Limit⊬ [dBµV/m]⊬	Margin∍ [dB]∍	Height∍ [cm] _ĕ	Angle [°]	Polarity
1₽	2475.02	80.94₽	33.97₽	74.00₽	-6.94₽	150₽	2₽	Vertical₂
2₽	2483.533	49.55₽	34.00	74.00∂	24.45₽	150₽	353₽	Vertical₂

Average Value

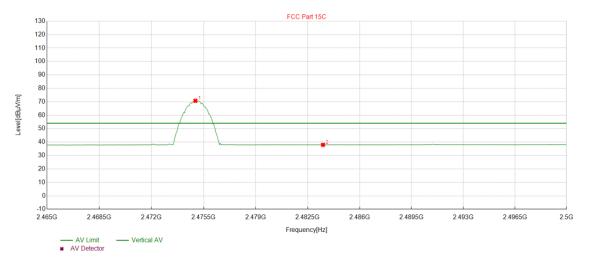

	NO.	Freq.√ [MHz]	Level [dBµV/m]	Factor⊬ [dB]⊬	Limit⊬ [dBµV/m]⊬	Margin∍ [dB]∍	Height⊬ [cm]⊬	Angle [°]	Polarity₅
ĺ	1₽	2474.95	70.71₽	33.96₽	54.00₽	-16.71₽	150₽	4.	Vertical⊬
	2₽	2483.533	37.93	34.00₽	54.00₽	16.07₽	150₽	286₽	Vertical _∞




9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set SPA Centre Frequency = Operation Frequency, RBW= 30KHz, VBW≥3×RBW.
- 3. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

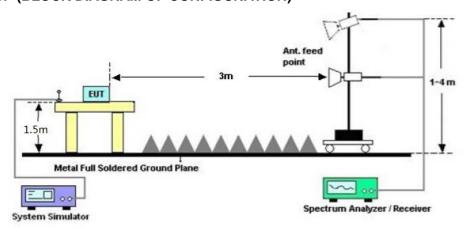



9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK

Test Channel (MHz)	20DB BANDWIDTH (MHz)	99% BANDWIDTH (MHz)	Criteria
2405	1.184	1.1346	PASS
2445	1.183	1.1338	PASS
2475	1.168	1.1323	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



10. FCC LINE CONDUCTED EMISSION TEST


10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage			
Frequency	Q.P.(dBuV)	Average(dBuV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

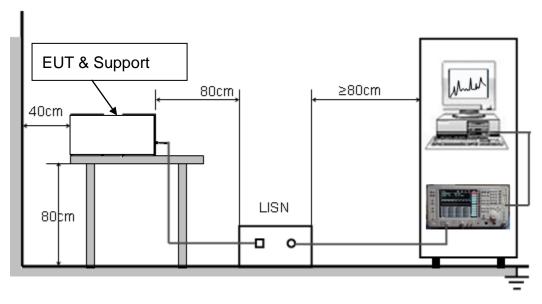



Report No.: AGC15798230766FE03 Page 31 of 32

10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Report No.: AGC15798230766FE03

Page 32 of 32

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC15798230766AP01

APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC15798230766AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.