

## ANTENNA INFORMATION

Brand	LG
ODM	Quanta
Platform model name	14Z90S
Intel platform (ex: Yes, No or NA)	Y
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB
SAR minimum separation (mm)	

Antenna manufacturer	Pulse	
Address	99 Huo Ju Road, Suzhou New District SND Hi-Tech industrial Park Suzhou 215009, Jiangsu Province, P.R.China	
Antenna Part number	<b>Main:</b> <b>QD602700000</b> <b>(TQ27000)</b>	<b>Aux:</b> <b>QD602700000</b> <b>(TQ27000)</b>
Antenna type (ex: PIFA, Dipole...etc)	PIFA	

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	2.48	2.42	2.37	3.71	4.04	3.09	2.02	0.28	3.39	3.61
Aux	2.65	3.16	3.02	4.01	3.75	2.77	3.54	3.11	4.00	3.53

Cable Assembly Part Number and Information					
	Cable PN	Cable length(cm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	J18-TQ270101	24.2	1.13 LLS	50	CM 958-C413-W-B-BU-A0 or compatible.
Aux	J18-TQ270102	31.1	1.13 LLS	50	CM 958-C413-W-B-BU-A0 or compatible.

\* 3D Antenna Peak Gain required being test in system basis.

# Table of Contents

<b>Cover page</b> .....	<b>1</b>
<b>1. Intel Reference Gain and Type</b> .....	<b>3</b>
<b>2. Document Revision History</b> .....	<b>3</b>
<b>3. Test &amp; System Description</b>	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
<b>4. Radiation characteristics of antenna loaded in Host Platform</b> .....	<b>6</b>
<b>Annex A. Photographs</b>	
A.1 Setup Photo.....	16
A.2 Test sample.....	17
<b>Annex B. Antenna Location</b>	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20

## 1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96

### 3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

## 2. Document Revision History

Revision #	Revision Details	Issued Date
Rev. 00	First Issue	2023.06.20


### 3. Test & System Description

#### 3.1 Measurement Method and System

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

#### 3.2 Test setup

Radiated Setup 0.6GHz-8.5GHz

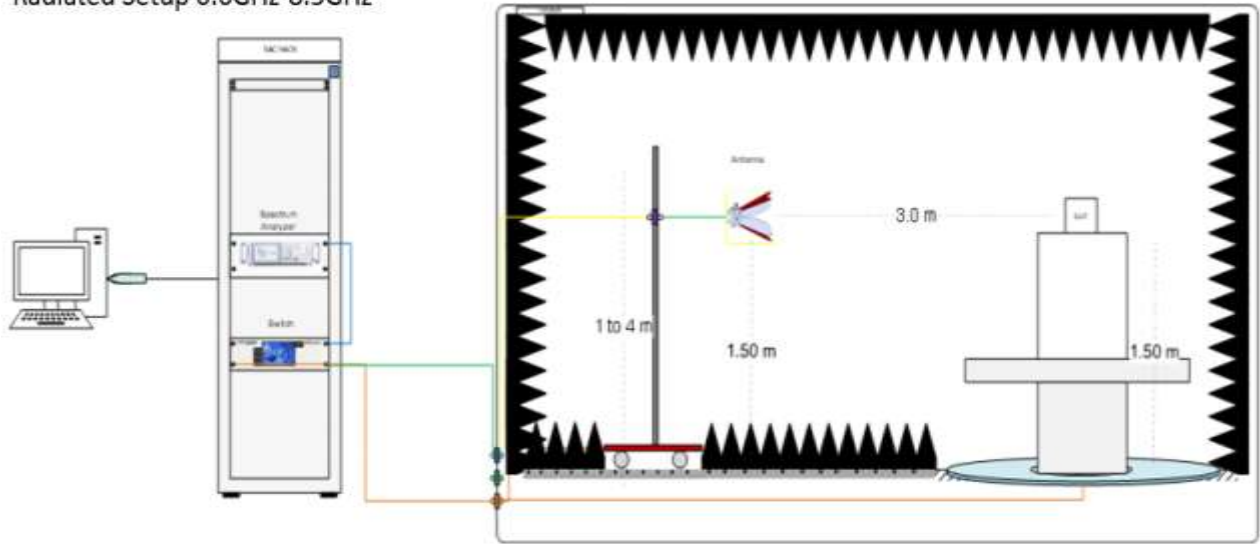

#### 3.3 Equipment list


ID#	Device	Type/Model	Serial#	Manufactuter	Cal. Date	Estimated Next Cal. Date
1	Anechoic Chamber	AMS8500	-	ETS-Lindgren	2023-07-13	2024-07-13
2	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
3	Switch & Positioning system	2090	-	ETS-Lindgren	N/A	N/A
4	Horn Antenna	3164-08	99210	ETS-Lindgren	N/A	N/A
5	Network Analyzer	E5071C	MY46103999	Agilent	2023-07-13	2024-07-13
6	Commercial test software	EMQuest	Version 1.14 Build 10265 SN:1156	ETS-Lindgren	2023-07-13	2024-07-13
7	Test Operator	YY Chen		Pulse	2023/8/9	

#### 4. Radiation characteristics of antenna loaded in Host Platform

##### Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.48

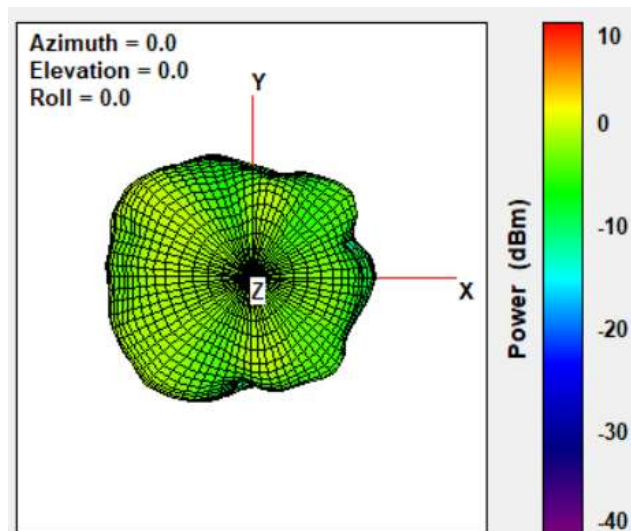


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.42

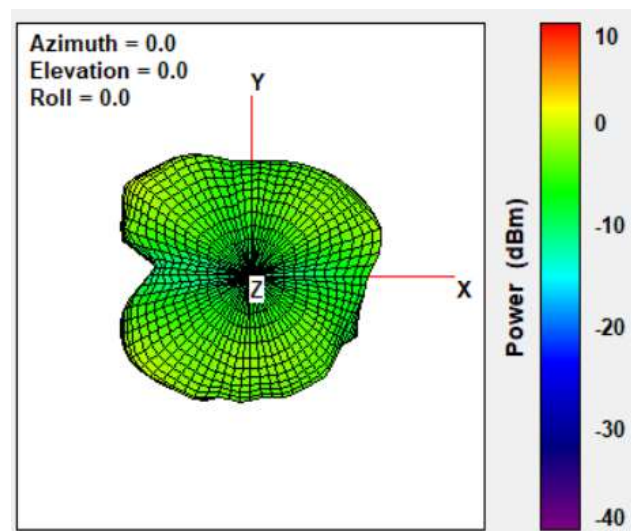


## Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.37

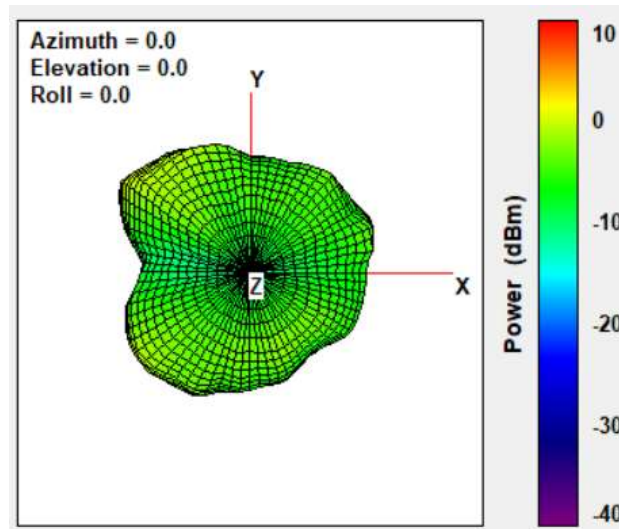


## Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	3.71

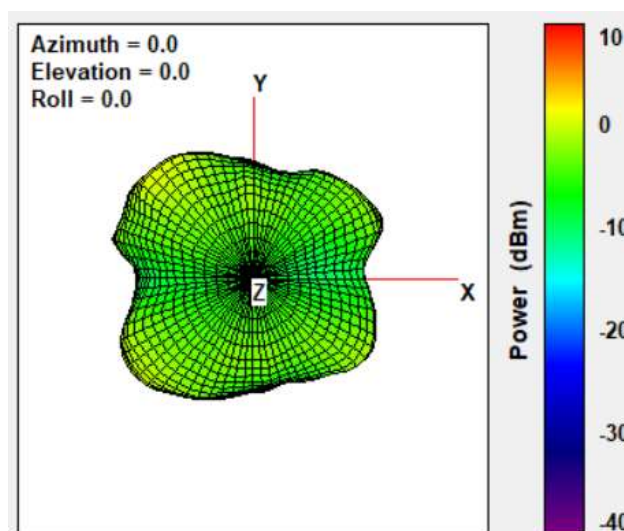


## Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	4.04

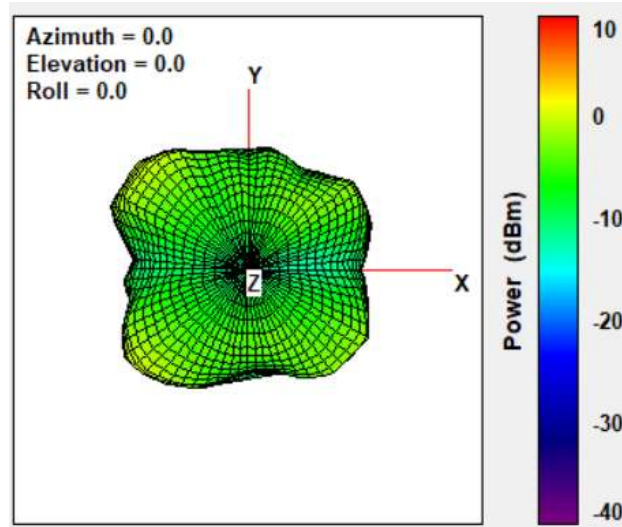


## Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.09

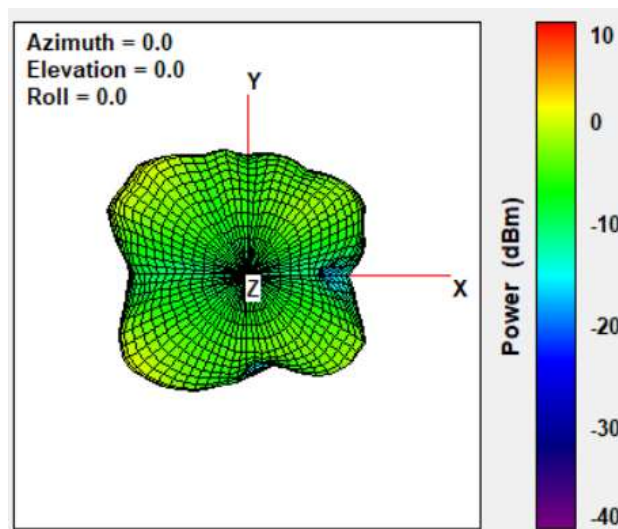


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.02

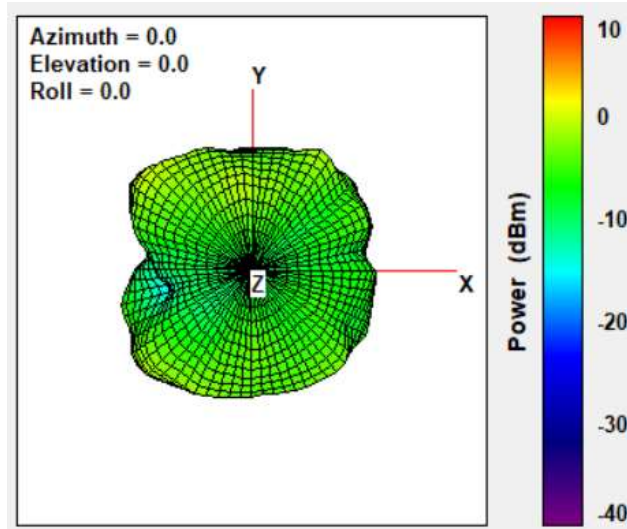

Max Antenna 3D Radiation Pattern 6425-6525 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	0.28

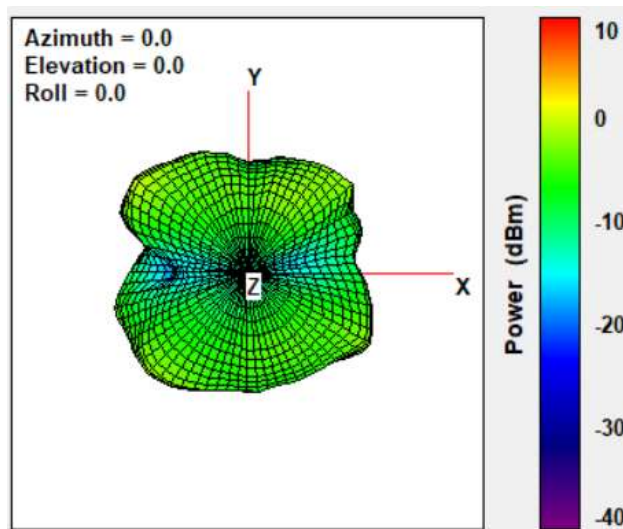




## Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.39

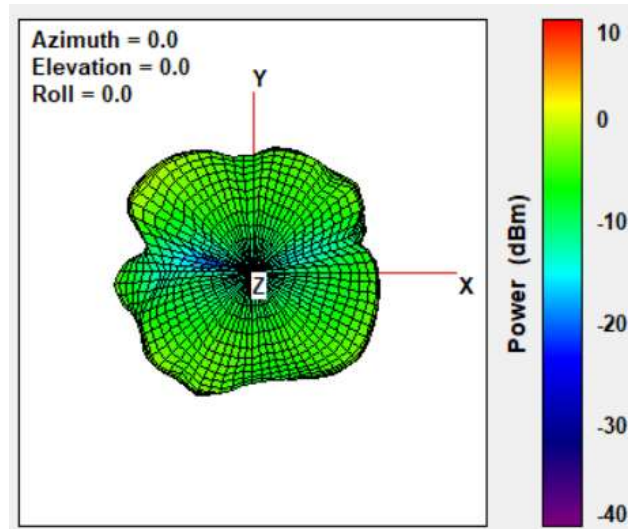

## Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.61

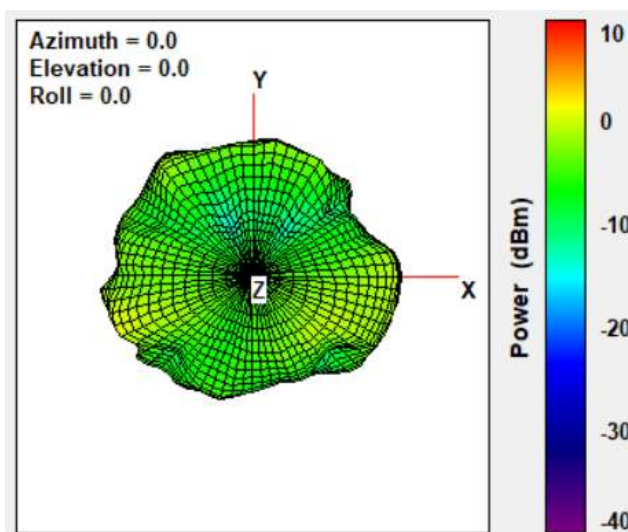

## Auxiliary Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.65

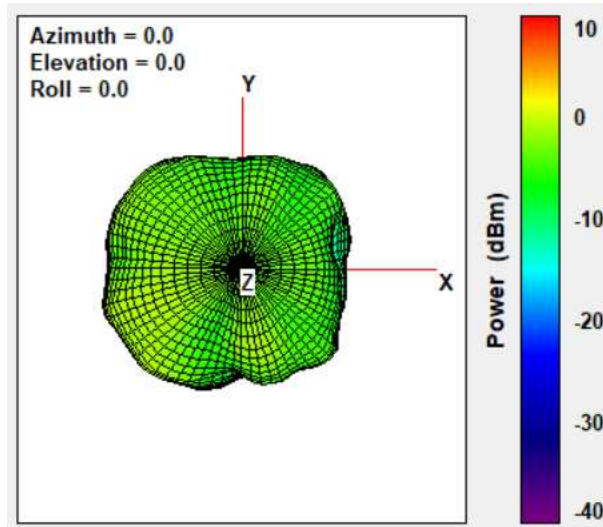


### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	3.16

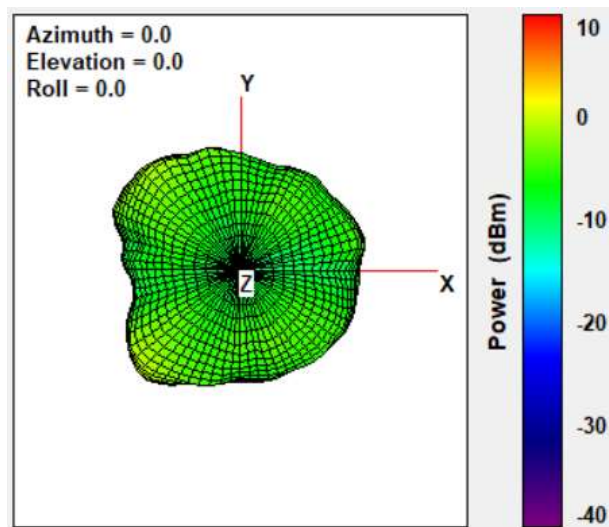


## Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	3.02

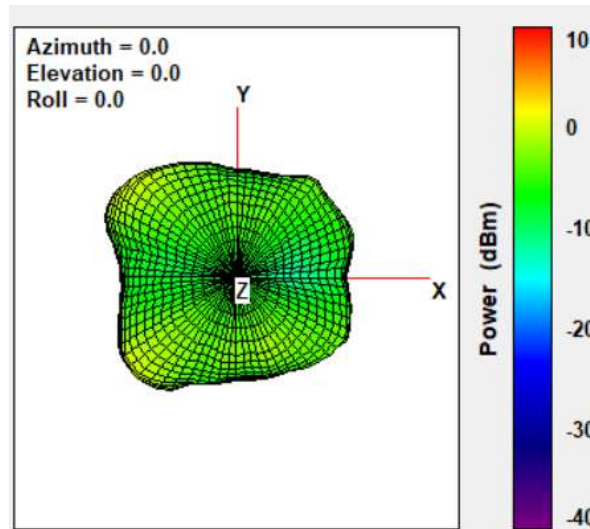


## Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	4.01

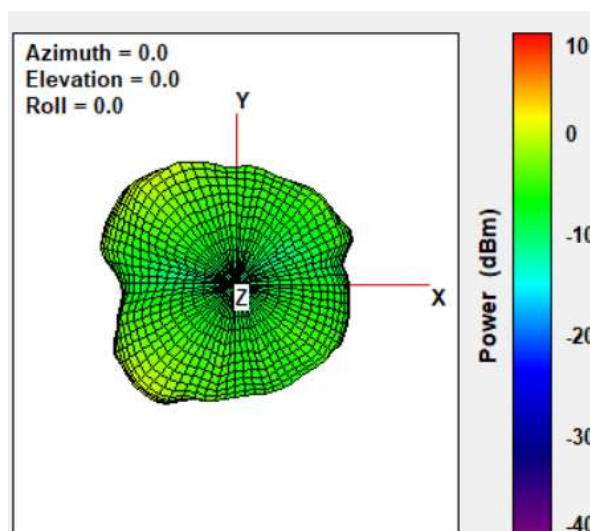


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.75

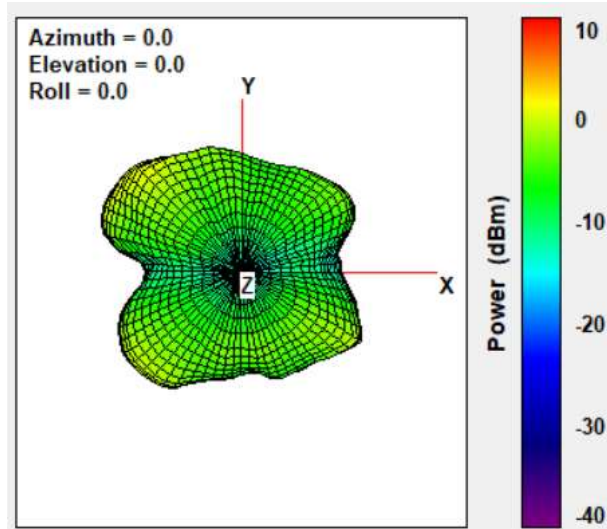


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.77

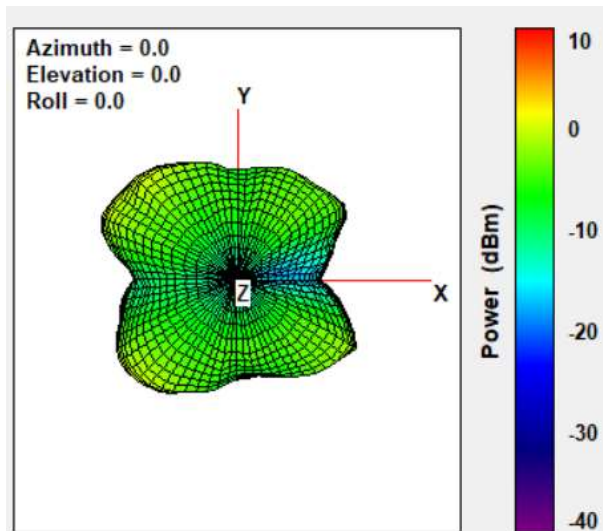


## Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.54

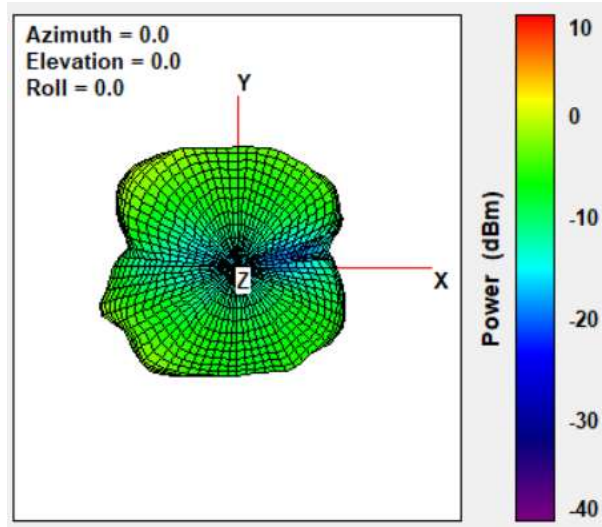


## Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.11

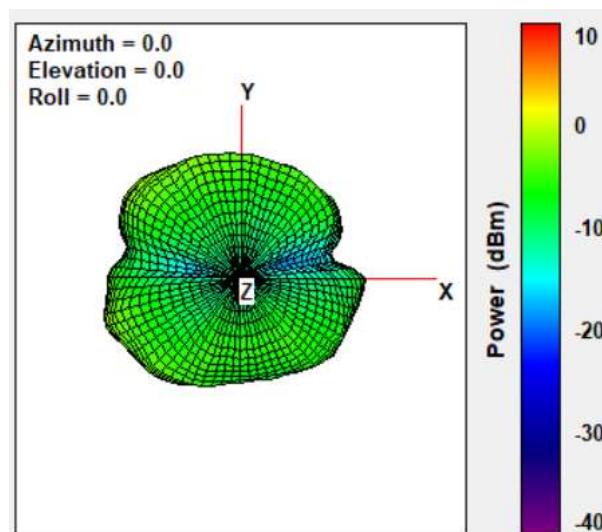


## Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	4.00

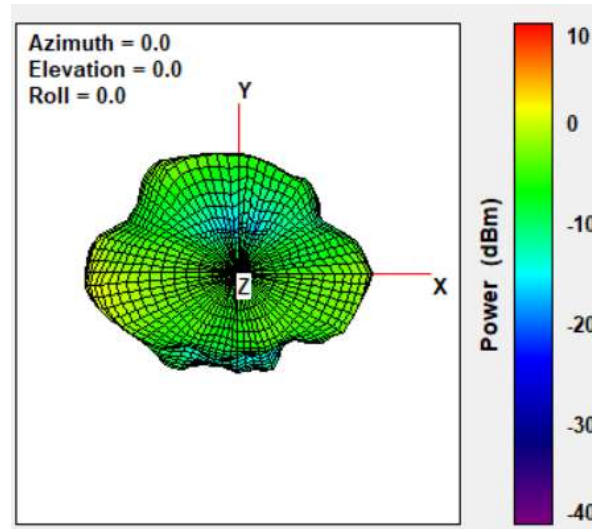

## Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.53

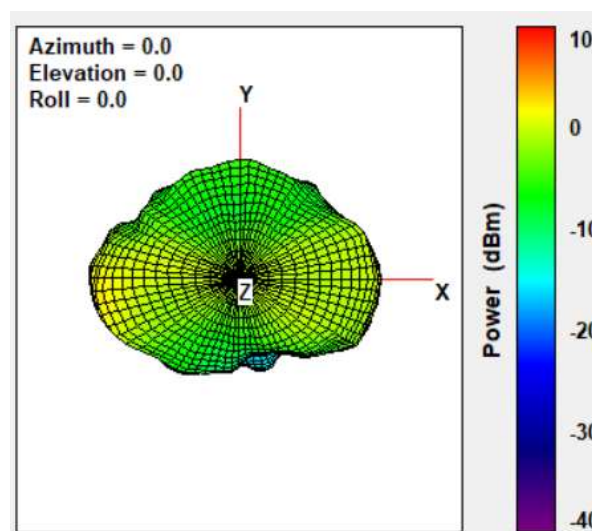

# Annex A. Photographs

---

## A.1 Setup Photo


<insert test diagram here for test site utilized>



## A.2 Test sample



### Main Antenna

#### Antenna Drawing

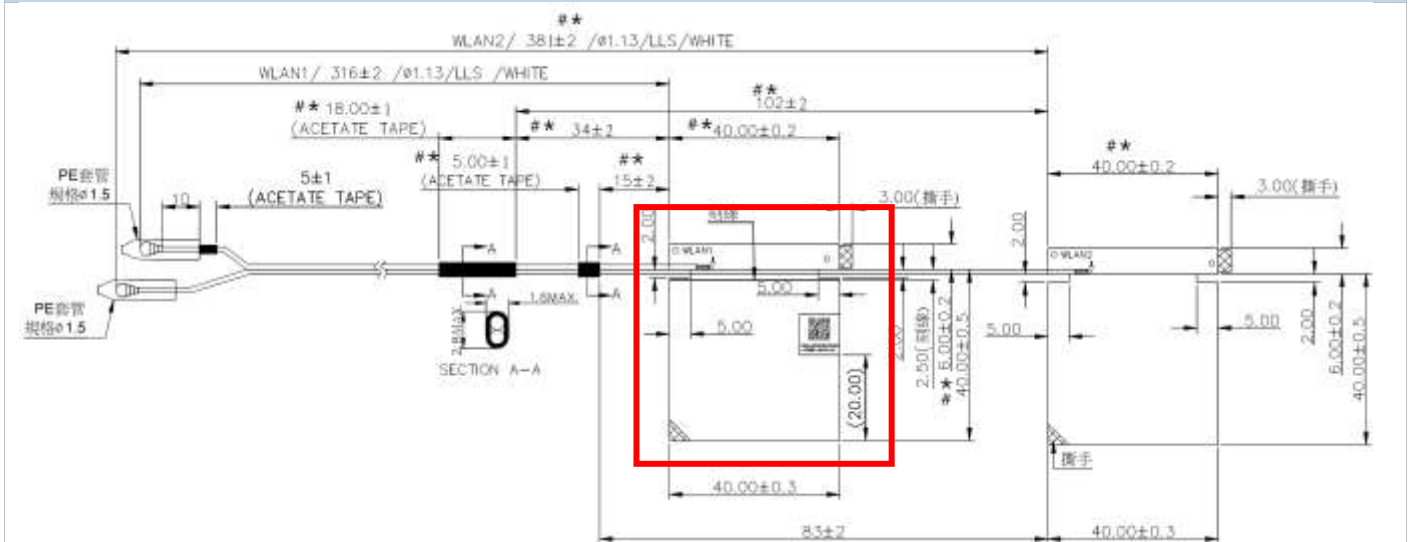


#### Antenna Photo

##### Front

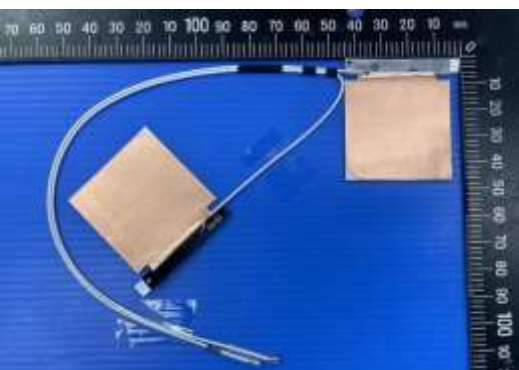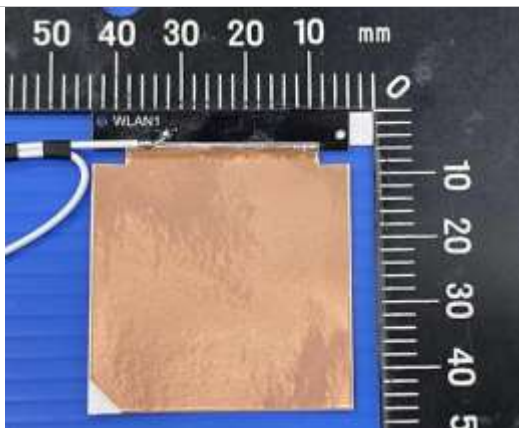

##### Back

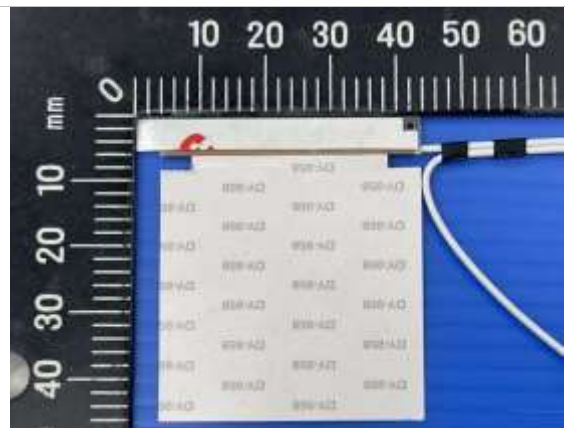


Note: antenna photo should include L type ruler




## Aux Antenna

### Antenna Drawing

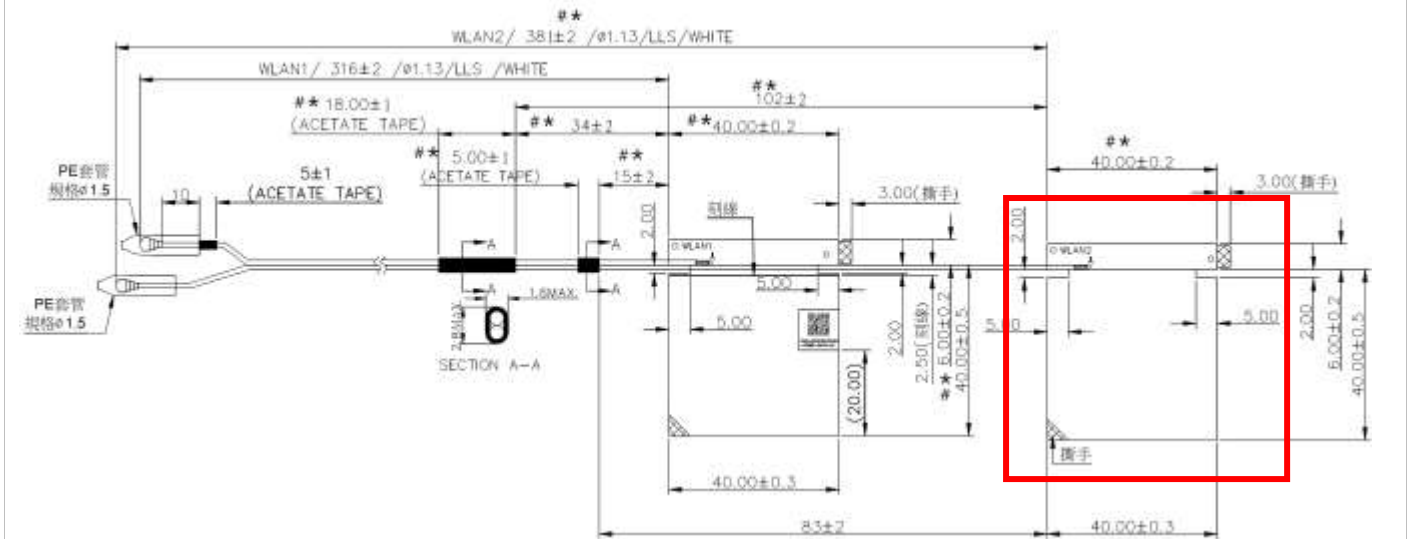


### Antenna Photo

#### Front

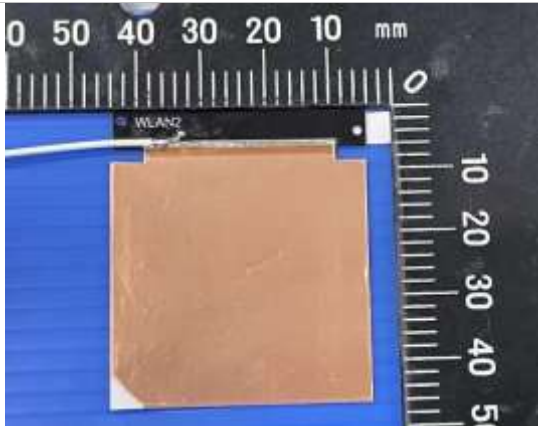

#### Back

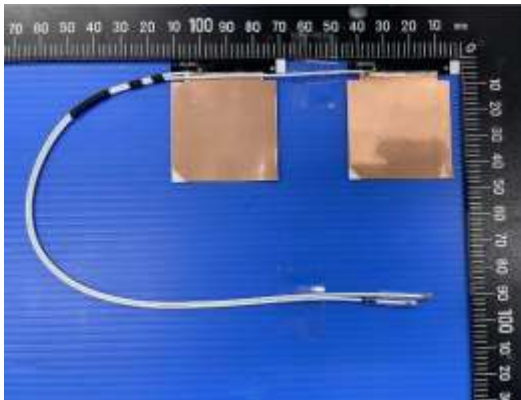


Note: antenna photo should include L type ruler

# Annex B. Antenna Location

## B.1 Antenna Host Platform Location Information



Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).


Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

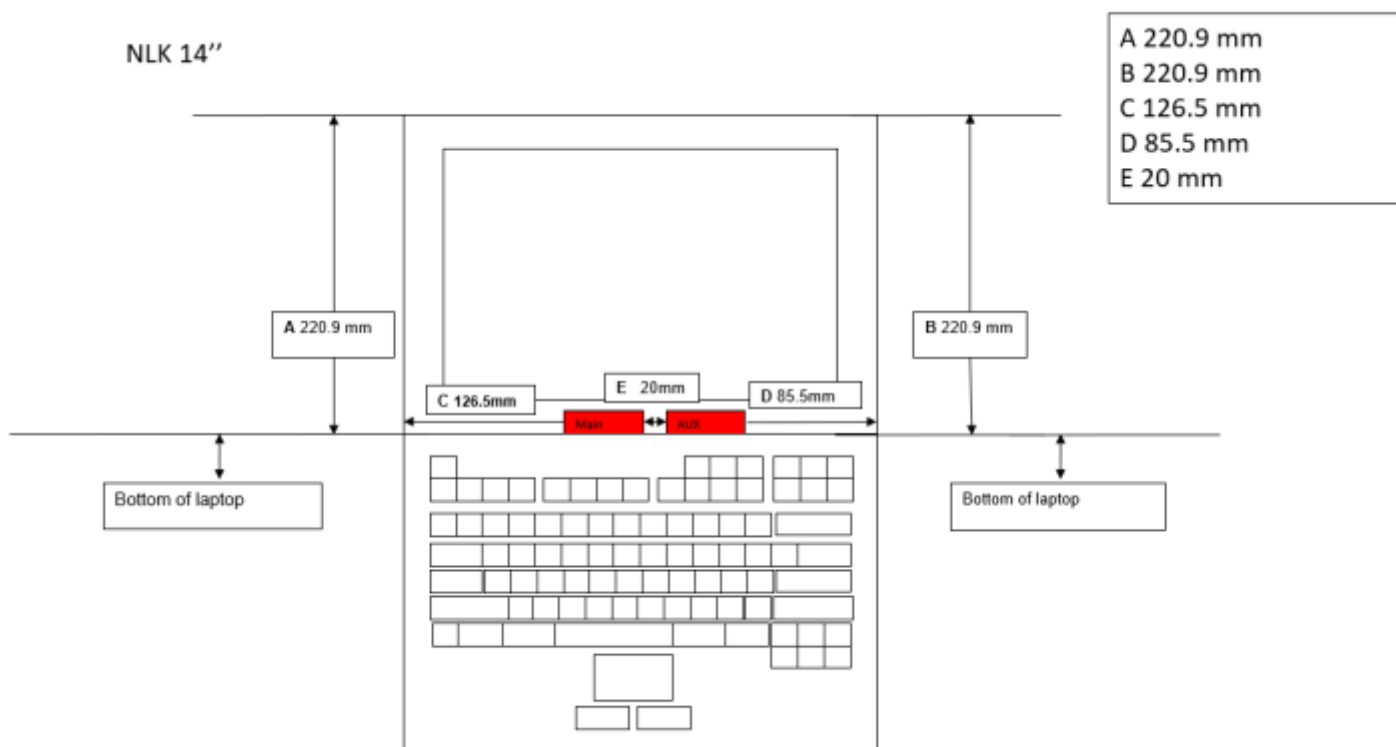

## B.2 Antenna dimensional information for SAR evaluation

Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

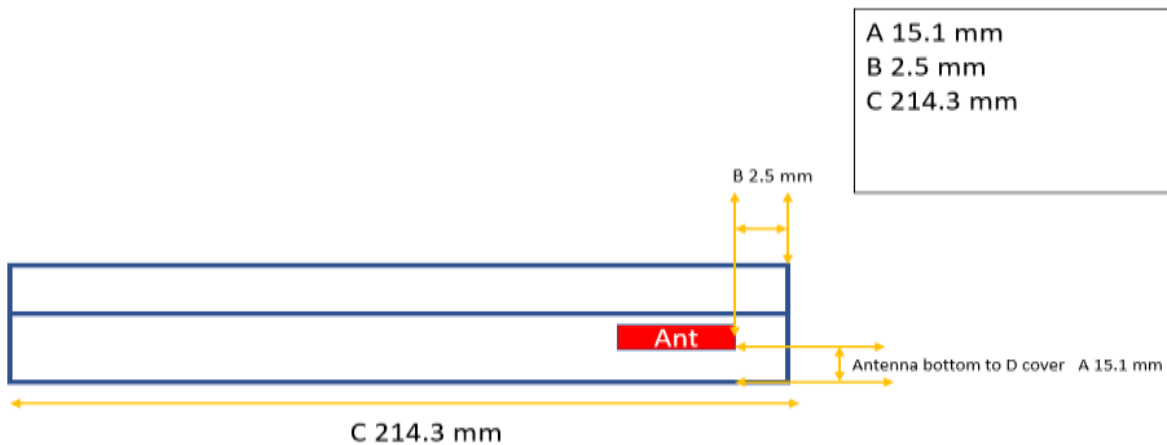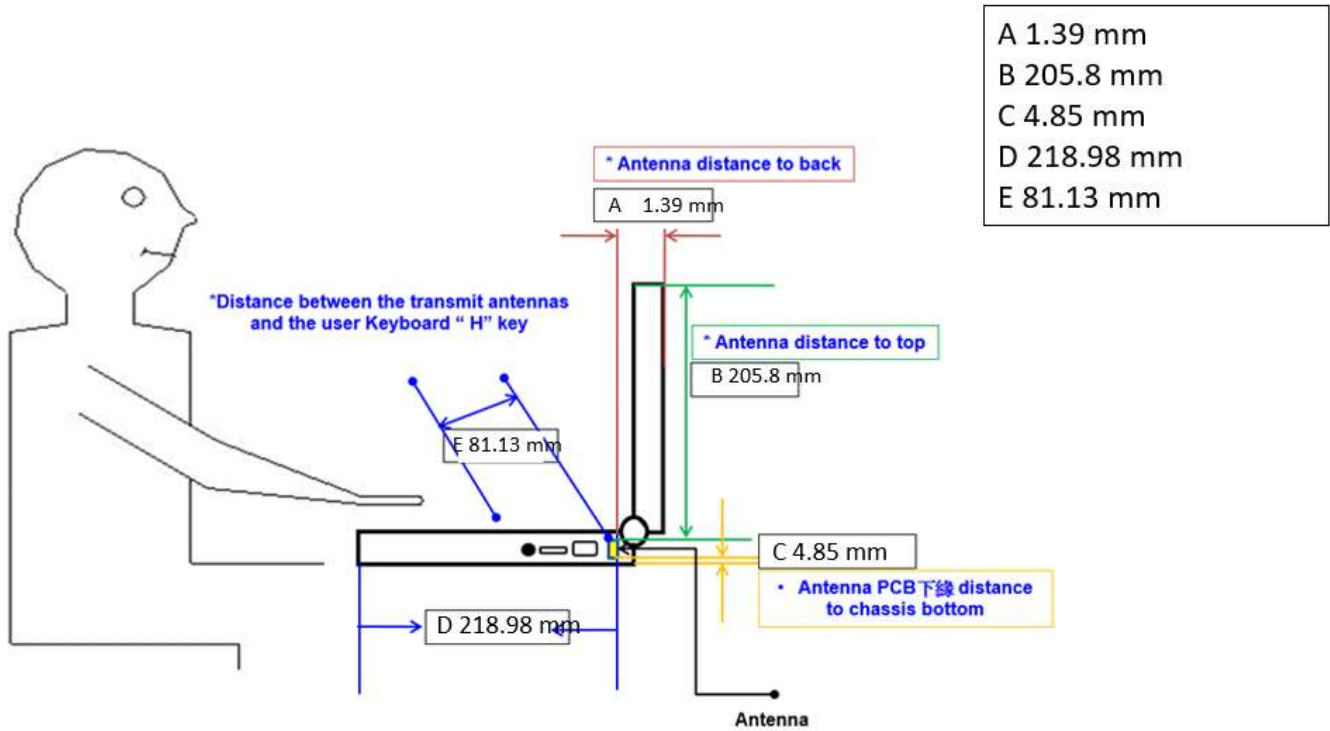

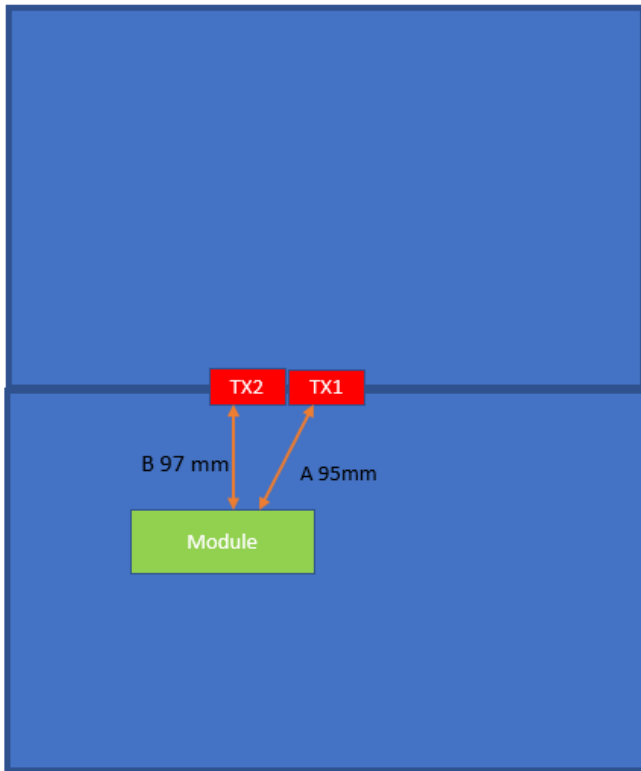

A 95 mm  
B 97 mm