

FCC 15.407 U-NII
(Permissive Change)
5GHz Test Report

for

LG Electronics Inc.

222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,
17709 Republic of Korea

Product Name : Notebook Computer
Model Name : (1)15Z90ST (2)15ZB90ST
(3)15ZD90ST (4)15ZG90ST
Brand : LG
FCC ID : BEJ-15Z90RT

Prepared by: : AUDIX Technology Corporation,
EMC Department



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT.....	4
1. REVISION RECORD OF TEST REPORT	4
2. SUMMARY OF TEST RESULTS	5
3. GENERAL INFORMATION	6
3.1. Description of Application	6
3.2. Description of EUT	7
3.3. Reference Test Guidance.....	8
3.4. Information for Permissive Change.....	8
3.5. Antenna Information	9
3.6. EUT Specifications Assessed in Current Report	10
3.7. Description of Key Components	12
3.8. Test Configuration.....	14
3.9. Output Power Setting	21
3.10. Tested Supporting System List.....	22
3.11. Setup Configuration.....	22
3.12. Operating Condition of EUT	22
3.13. Description of Test Facility	23
3.14. Measurement Uncertainty	24
4. MEASUREMENT EQUIPMENTLIST.....	25
4.1. Conducted Emission Measurement	25
4.2. Radiated Emission Measurement	25
4.3. RF Conducted Measurement	26
5. CONDUCTED EMISSION.....	27
5.1. Block Diagram of Test Setup	27
5.2. Conducted Emission Limit	27
5.3. Test Procedure	27
5.4. Test Results	27
6. RADIATED EMISSION	28
6.1. Block Diagram of Test Setup	28
6.2. Radiated Emission Limits.....	29
6.3. Test Procedure	32
6.4. Measurement Result Explanation.....	33
6.5. Test Results	33
7. MAXIMUM OUTPUT POWER	34
7.1. Block Diagram of Test Setup	34
7.2. Specification Limits.....	34
7.3. Test Procedure	35
7.4. Test Results	35
8. DEVIATION TO TEST SPECIFICATIONS	36
 APPENDIX A TEST DATA AND PLOTS	
APPENDIX B TESTPHOTOGRAPHS	

TEST REPORT (Permissive Change)

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory : LG Electronics Nanjing New Technology Co., Ltd.
EUT Description
(1) Product : Notebook Computer
(2) Model : (1)15Z90ST (2)15ZB90ST (3)15ZD90ST (4)15ZG90ST
(3) Brand : LG
(4) Power Supply: DC 20V, 3.25A


Applicable Standards:

Title 47 FCC CFR Part 15 Subpart E

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2023. 12. 08

Reviewed by:  (Annie Yu/Administrator)

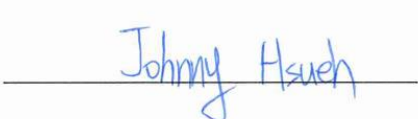Approved by:  (Johnny Hsueh/Section Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2023. 12. 08	Original Report	EM-F230614

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.205/15.209	Undesirable Emissions Limits: Radiated Band Edge and Radiated Spurious Emission	PASS
15.407(a)(5)/15.407(e)	Emission/Occupied Bandwidth	N/A ^{Note3}
15.407(a)	Maximum Output Power	PASS
15.407(b)	Conducted Band Edges	N/A
15.407(a)	Power Spectral Density	N/A ^{Note3}
15.407	Frequency Stability	N/A ^{Note3}
15.407(h)(2)	Dynamic Frequency Selection(DFS)	N/A
15.203	Antenna Requirement	Compliance
Note: 1. Decision rule according to the limit of the test standard chapter, the test value is lower than the limit specified in the test chapter, and it is judged as Pass. 2. The uncertainties value is not used in determining the result. 3. Due to the difference mentioned by cover letter don't influence on RF characteristics, so it is unnecessary to re-test.		

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory	Wistron NeWeb (Kunshan) Corporation 789 Yujinxiang Road, Comprehensive Free Trade Zone, Kunshan City, Jiangsu Province, Province 215300, P.R.C
Product	Notebook Computer
Model	(1)15Z90ST (2)15ZB90ST (3)15ZD90ST (4)15ZG90ST The difference between all models is different in the sales customers.
Brand	LG

3.2. Description of EUT

Test Model	15Z90ST		
Serial Number	N/A		
Power Rating	DC 20V, 3.25A		
Software Version	XY (X, Y can be 0 to 9 for different SW version not influence RF parameter)		
RF Features	WLAN:802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.1)		
Transmit Type	2.4 GHz		
	802.11b		1T1R
	802.11g		1T1R
	802.11n-HT20		2T2R
	802.11n-HT40		2T2R
	802.11ax-HE20		2T2R
	802.11ax-HE40		2T2R
	BT/BLE		1T1R
	U-NII Bands		
	802.11a		1T1R
	802.11n-HT20/802.11ac-VHT20/802.11ax-HE20		2T2R
	802.11n-HT40/802.11ac-VHT40/802.11ax-HE40		2T2R
	802.11ac-VHT80/802.11ax-HE80		2T2R
	802.11ac-VHT160/802.11ax-HE160		2T2R
	The MIMO is uncorrelated and supported SDM (Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).		
	Device Category	<input type="checkbox"/> Outdoor Access Point <input type="checkbox"/> Fixed point-to-point Access Point <input type="checkbox"/> Indoor Access Point <input checked="" type="checkbox"/> Mobile and Portable client device	
Test Sample	Sample No.	Test Item	Firmware
	01	AC Conduction, RSE, RF Conducted	N/A
Sample Status	Trial sample		
Date of Receipt	2023. 11. 09		
Date of Test	2023. 11. 15 ~ 24		
Interface Ports of EUT	<ul style="list-style-type: none"> • Three USB Type C Port • One Earphone Port 		
Accessories Supplied	<ul style="list-style-type: none"> • AC Adapter • USB C Cable • LAN Gender 		

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.

3.3. Reference Test Guidance

KDB 789033 D02 General UNII Test Procedures New Rules v02r01
 KDB 291074 D02 EMC Measurement v01
 ANSI C63.10:2013

3.4. Information for Permissive Change

- The EUT is an addition version with original FCC ID: BEJNT-15Z90R is as following.
 - (a) To add new models 15Z90ST, 15ZB90ST, 15ZD90ST and 15ZG90ST, the difference with original are in Main board, WLAN Sub board and CPU.
 - (b) Based on original 15Z90RT MAIN B/D PCB main board, the difference between 15Z90RT MAIN B/D PCB main board and 15Z90ST MAIN B/D PCB main board is refer to next table. The 15Z90ST MAIN B/D PCB main board is for new models.
 - (c) Based on original 15Z90RT SUB B/D WLAN Sub board, the difference between 15Z90RT SUB B/D WLAN Sub board and 15Z90ST SUB B/D WLAN Sub board is refer to next table. The 15Z90ST SUB B/D WLAN sub board is for new models.
 - (d) To add new CPUs for 15Z90ST MAIN B/D PCB main board.
 - (e) To add new Type C cable (3A).
 - (f) To modify panel model from ATNA56YX08-0 to ATNA56YX09.6.
- The differences between this application and original's ID as clarify in following list.

Model \ Difference		Main Board	WLAN Sub Board	CPU
		Original	15Z90RT 15ZB90RT 15ZD90RT 15ZG90RT	15Z90RT MAIN B/D PCB
This Time	15Z90ST 15ZB90ST 15ZD90ST 15ZG90ST	15Z90ST MAIN B/D PCB	15Z90ST SUB B/D	Intel, Ultra 7 155H Intel, Ultra 5 125H

- Due to above different item, there have some test item should be re-tested (see section 2), the test data are recorded in this report.

3.5. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Gain(dBi)	
					Main	AUX
1.	WA-P-LELE-04-044	INPAQ	Mono-Pole	2400	3.20	3.70
				2450	3.60	3.90
				2500	3.30	4.20
				5150	1.90	2.40
				5470	2.70	1.10
				5850	1.30	1.10
				5925	1.60	1.60
				6525	-0.50	0.30
				7125	3.90	3.00

According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then
 Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi
 Note: WLAN 5G: Directional gain =
 5850MHz: Directional gain = $10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20$ dBi
 We chose the antenna gain corresponding to the frequency listed on the table which is closer to center frequency of WLAN/BT.

3.6. EUT Specifications Assessed in Current Report

Mode	U-NII Band	Fundamental Range (MHz)	Channel Number
802.11a	4	5850-5895	3
802.11n-HT20/ 802.11ac-VHT20 802.11ax-HE20	4	5850-5895	3
802.11n-HT40/ 802.11ac-VHT40 802.11ax-HE40	4	5850-5895	2
802.11ac-VHT80 802.11ax-HE80	4	5855	1
802.11ac-VHT160 802.11ax-HE160	4	5815	1

Mode	Modulation	Data Rate (Mbps)
802.11a	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 144.4
802.11n-HT40		Up to 300
802.11ac-VHT20	OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)	Up to 173.3
802.11ac-VHT40		Up to 400
802.11ac-VHT80		Up to 866.7
802.11ac-VHT160		Up to 1733.3
802.11ax-HE20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM)	Up to 287
802.11ax-HE40		Up to 574
802.11ax-HE80		Up to 1201
802.11ax-HE160		Up to 2402

Channel List					
802.11a/802.11n-HT20/802.11ac-VHT20/ 802.11ax-HE20			802.11n-HT40/802.11ac-VHT40/ 802.11ax-HE40		
U-NII Band	Channel Number	Frequency (MHz)	U-NII Band	Channel Number	Frequency (MHz)
4	169	5845	4	167	5835
	173	5865		175	5875
	177	5885			

Channel List					
802.11ac-VHT80/802.11ax-HE80			802.11ac-VHT160/802.11ax-HE160		
U-NII Band	Channel Number	Frequency (MHz)	U-NII Band	Channel Number	Frequency (MHz)
4	171	5855	4	163	5815

Note: Test modes are presented at section 3.7.

3.7. Description of Key Components

3.7.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Win 11	---
	---	Non-OS	---
Main Board	LG	15Z90RT MAIN B/D PCB	Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
	LG	15Z90ST MAIN B/D PCB*	Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
WLAN SUB Board	LG	15Z90RT SUB B/D	Manufacturer: #1 Hannstar Board Tech (Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
	LG	15Z90ST SUB B/D*	Manufacturer: #1 Hannstar Board Tech (Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
CPU (Socket: BGA1744)	Intel	i7-1360P	2.2GHz
	Intel	i5-1340P	1.9GHz
	Intel	i3-1315U	1.2GHz
CPU (Socket: BGA2049)	Intel	Ultra 7 155H*	3.8GHz
	Intel	Ultra 5 125H*	3.6GHz
15.6" LCD Panel	Samsung	ATNA56YX09-0	Resolution: 1920x1080@60Hz (OLED,FHD)
Storage (SSD)	SK hynix	---	256GB/512GB/1TB/2TB
	Samsung	---	128GB/256GB/512GB/1TB/2TB
Memory (RAM)	Samsung	---	8GB/16GB32GB LPDDR5X 7500MHz (On Board)
	SK Hynix	---	8GB/16GB32GB LPDDR5X 7500MHz (On Board)
Battery Pack	LG	LB2122LM	DC15.52V, 60Wh Typ 3866 mAh
WLAN Combo Card	Intel	AX211D2W	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card FCC ID: PD9AX211D2 IC: 1000M-AX211D2
WLAN Combo Antenna	LG (INPAQ)	WA-P-LELE-04-044	PCB, Mono-pole Type Main: Black, Aux: Gray
Touch Pad	Lite on	SP8000(SG-A0620-00A)	---
	Elan	SB068D-26H0	---
Keyboard	TIC	KT0122L2	---
Web Camera	Luxvisions	2BG204N3(2Mic)	---

Item	Supplier	Model / Type	Character
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100Megabit Ethernet
		80-5946-101	(Black) 10/100 Megabit Ethernet
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100Megabit Ethernet
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet
	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	370-50713	(White) 10/100Megabit Ethernet
		370-50714	(Black) 10/100 Megabit Ethernet
Type C to LAN: Shielded, Undetached, 0.12m			
AC Adapter	LG (PI ELECTRONICS)	LP65WFC20P-NJ W	(White) I/P: AC 100-240V, 1.6A, 50-60Hz O/P: (PDO) DC5V, 3A (15W) or DC9V, 3A (27W) or DC 15V,3A (45W) or DC 20V, 3.25A (65W) O/P: (PPS) DC5V- 20V, 3.25A, Max 65W Wall-Mounted: (2C)
			(Black) I/P: AC 100-240V, 1.6A, 50-60Hz O/P: (PDO) DC5V, 3A (15W) or DC9V, 3A (27W) or DC 15V,3A (45W) or DC 20V, 3.25A (65W) O/P: (PPS) DC5V- 20V, 3.25A, Max 65W Wall-Mounted: (2C)
	#1 Type C Cable, Shielded, Undetached, 2.0m (5A) #2 Type C Cable, Shielded, Undetached, 1.8m (3A)*		
Note: “*” Standing for adding new configuration.			

Remark: For more detailed features description, please refer to the manufacturer’s specifications or the user manual.

3.7.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

SKU (Mode) 1		
Main Board	LG, 15Z90ST MAIN B/D PCB	
WLAN SUB Board	LG, 15Z90ST SUB B/D	
CPU	Intel, Ultra 7 155H	
Memory (RAM)	32GB	
15.6” LCD Panel	Samsung, ATNA56YX09-0	
Storage (SSD)	SK hynix, 256GB	
	Samsung, 2TB	
Battery Pack	LG, LB2122LM, 60Wh	
Touch Pad	Lite on, SP8000(SG-A0620-00A)	
WLAN Combo Card	Intel, AX211D2W	
WLAN Combo Antenna	LG (INPAQ), WA-P-LELE-04-044	
Type C	AC Adapter	LG(PI ELECTRONICS), LP65WFC20P-NJ W
	Link to LAN Gender	10/100Mbps
	Link to USB HUB	---

3.8. Test Configuration


Mode	TX _{on} (ms)	TX _{on+off} (ms)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
802.11a	2.085	2.130	0.979	0.092
802.11n-HT20	4.000	4.030	0.993	N/A
802.11n-HT40	4.000	4.030	0.993	N/A
802.11ac-VHT80	3.970	4.010	0.990	N/A
802.11ac-VHT160	2.780	2.820	0.986	N/A
802.11ax-HE20	3.990	4.020	0.993	N/A
802.11ax-HE40	3.990	4.020	0.993	N/A
802.11ax-HE80	3.990	4.020	0.993	N/A
802.11ax-HE160	2.290	2.330	0.983	N/A
802.11ax-HE20 (RU Config 26)	0.725	0.790	0.918	0.372
802.11ax-HE20 (RU Config 52)	1.450	1.495	0.970	0.132
802.11ax-HE20 (RU Config 106)	3.040	3.080	0.987	N/A
802.11ax-HE40 (RU Config 242)	1.410	1.455	0.969	0.137
802.11ax-HE80 (RU Config 484)	2.785	2.835	0.982	N/A
802.11ax-HE160 (RU Config 996)	1.330	1.370	0.971	0.128

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.



Mode	TX _{on} (ms)	T _{on} +T _{off} (ms)
802.11ax-HE20		
802.11ax-HE40		
802.11ax-HE80		
802.11ax-HE160		

Mode	TX _{on} (ms)	T _{on} +T _{off} (ms)
802.11ax-HE20 (RU Config 26)		
802.11ax-HE20 (RU Config 52)		
802.11ax-HE20 (RU Config 106)		
802.11ax-HE40 (RU Config 242)		

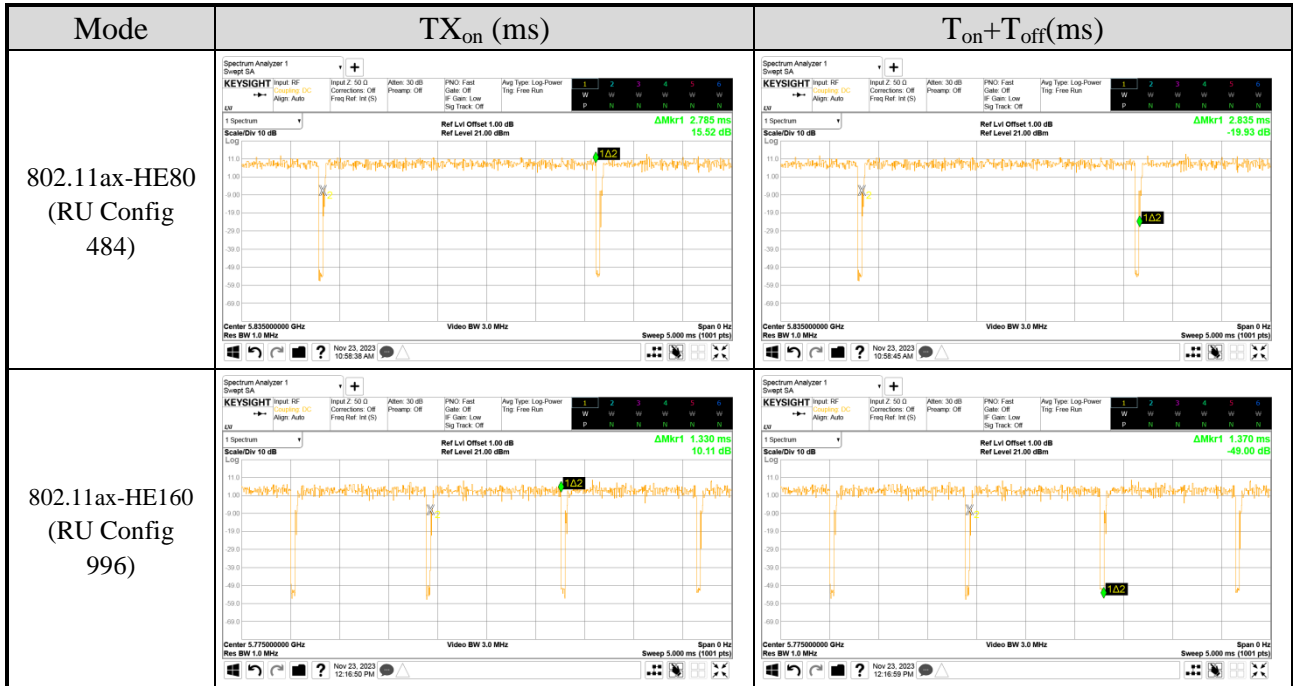

AC Conduction	
Normal operation	

Item	Mode	Data Rate	RU Configuration	Test Channel	
Radiated Test Case	Radiated Spurious Emission (30MHz~1GHz)	802.11ax-HE40	HE0	242/61	167

Item	Mode	Data Rate	Test Channel	
Radiated Test Case	Radiated Spurious Emission <small>Note 1 & 2</small>	802.11ax-HE40	HE0	167

Item	Mode	Data Rate	RU Configuration	Test Channel	
Radiated Test Case	Radiated Band Edge <small>Note 1</small>	802.11ax-HE160	HE0	996/S67	163

Item	Mode	Data Rate	Test Channel	
Conducted Test Case	Maximum output power	802.11a	6 Mbps	169/173/177
		802.11n-HT20	MCS8	169/173/177
		802.11n-HT40	MCS8	167/175
		802.11ac-VHT80	MCS0	171
		802.11ac-VHT160	MCS0	163
		802.11ax-HE20	HE0	169/173/177
		802.11ax-HE40	HE0	167/175
		802.11ax-HE80	HE0	171
		802.11ax-HE160	HE0	163

Item		Mode	Data Rate	RU Configuration	Test Channel
Conducted Test Case	Maximum output power	802.11ax-HE20	HE0	26/0	169
				52/37	
				106/53	
				26/0	177
				52/37	
				106/53	
		802.11ax-HE40	HE0	242/61	167
				242/62	175
		802.11ax-HE80	HE0	484/65	171
				484/66	
		802.11ax-HE160	HE0	996/67	163
				996/S67	

- Note 1: Mobile Device Portable Device
 and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:
 Lie Side Stand
- Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.
- Note 3: The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and 802.11ac mode for VHT20/VHT40, therefore investigated worst case to representative mode in the test report.
- Note 4: The data rates were selected based on preliminary testing that identified rate as the worst case for output power.
- Note 5: Based on these differences, we will conduct testing according to the worst-case scenarios for RSE/band-edge as originally reported.

3.9. Output Power Setting

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main
802.11a	4	5845	19.000	19.000
		5865	19.000	18.750
		5885	17.000	17.250

Mode	U-NII Band	Centre Frequency (MHz)	Power		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11n-HT20	4	5845	16.250	16.250	802.11ax-HE20	4	5845	16.250	16.250
		5865	16.500	16.500			5865	16.500	16.500
		5885	14.000	14.000			5885	14.000	14.000

Mode	U-NII Band	Centre Frequency (MHz)	Power		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11n-HT40	4	5835	19.500	19.500	802.11ax-HE40	4	5835	19.500	19.500
		5875	17.250	17.250			5875	17.250	17.250

Mode	U-NII Band	Centre Frequency (MHz)	Power		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ac-VHT80	4	5855	18.000	18.000	802.11ax-HE80	4	5855	18.000	18.000

Mode	U-NII Band	Centre Frequency (MHz)	Power		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ac-VHT160	4	5815	15.750	15.750	802.11ax-HE160	4	5815	15.750	15.750

3.10. Tested Supporting System List

3.10.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	Earphone	APPLE	N/A	N/A	N/A
Partner System					
2.	AP Server	ASUS	RT-AX88U	N/A	FCC ID: MSQ-RTAXHP00 IC: 3568A-RTAXHP00

3.10.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	Earphone Cable: Unshielded, Undetachable, 1.2m
2.	AC adapter: M/N:WA-30B12, Cable: Unshielded, Detachable, 1.2m LAN cable: Unshielded, Detachable, 3.0m
3.	LAN cable: Unshielded, Detachable, 1.8m

3.11. Setup Configuration

3.11.1. EUT Configuration for Power Line & Radiated Emission

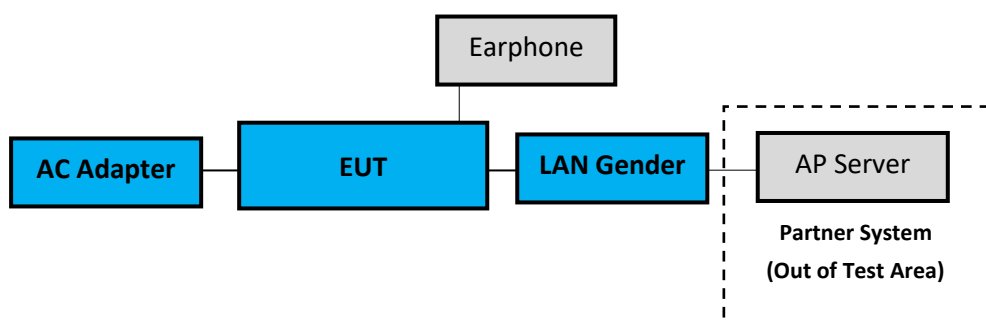

3.11.2. EUT Configuration for RF Conducted Test Items



3.12. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

[ANT AUX port (A Button in DRTU) and ANT Main port (B Button in DRTU)].

3.13. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.14. Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities		Frequency Range	Uncertainty
Conduction Test	<input type="checkbox"/>	No. 7 Shielded Room	9kHz-150kHz ±3.7dB
			150kHz-30MHz ±3.4dB
	<input checked="" type="checkbox"/>	No. 8 Shielded Room	9kHz-150kHz ±3.7dB
			150kHz-30MHz ±3.5dB
Radiation Test	<input checked="" type="checkbox"/>	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±3.6dB
			200MHz-1000MHz, 3m, Horizontal ±4.3dB
			30MHz-200MHz, 3m, Vertical ±4.4dB
			200MHz-1000MHz, 3m, Vertical ±4.8dB
			1GHz-6GHz, 3m ±4.8dB
			6GHz-18GHz, 3m ±4.5dB
	<input type="checkbox"/>	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±4.0dB
			200MHz-1000MHz, 3m, Horizontal ±4.4dB
			30MHz-200MHz, 3m, Vertical ±4.7dB
			200MHz-1000MHz, 3m, Vertical ±4.5dB
			1GHz-6GHz, 3m ±4.8dB
			6GHz-18GHz, 3m ±4.5dB
	<input type="checkbox"/>	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±4.3dB
			200MHz-1000MHz, 3m, Horizontal ±4.2dB
			30MHz-200MHz, 3m, Vertical ±4.8dB
			200MHz-1000MHz, 3m, Vertical ±4.7dB
			1GHz-6GHz, 3m ±4.6dB
			6GHz-18GHz, 3m ±4.4dB
	<input type="checkbox"/>	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±4.6dB
			200MHz-1000MHz, 3m, Horizontal ±4.4dB
			30MHz-200MHz, 3m, Vertical ±4.5dB
			200MHz-1000MHz, 3m, Vertical ±4.9dB
			1GHz-6GHz, 3m ±4.9dB
			6GHz-18GHz, 3m ±4.6dB
Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m	±3.4dB

Remark : Uncertainty = $ku_c(y)$

Test Items	Uncertainty
Maximum output power	± 0.33dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2023.01.11	1 Year
2.	A.M.N.	R&S	ENV432	101567	2023.06.02	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2022.12.19	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2022.12.14	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2023.04.13	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2023.09.06	1 Year
7.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2023.08.16	1 Year
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2023.03.29	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2023.06.20	1 Year
4.	Amplifier	HP	8447D	2944A06305	2022.12.29	1 Year
5.	Microwave Amplifier	Keysight	83051A	MY56480113	2023.09.11	1 Year
6.	Microwave Amplifier	Agilent	8449B	3008A02678	2023.02.17	1 Year
7.	Loop Antenna	TESEQ	HLA 6121	60478	2023.02.21	1 Year
8.	Bilog Antenna	TESEQ	CBL6112D	33821	2023.06.30	1 Year
9.	Horn Antenna	EMCO	3115	9112-3775	2023.05.04	1 Year
10.	Horn Antenna	COM-POWER	AH-840	101092	2022.12.30	1 Year
11.	5G Notch Filter	Microwave Circuits	N0257881	459776	2022.08.10	1 Year
12.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2023.01.07	1 Year
13.	Coaxial Cable	HUBER+SUHNER	RG223/U	RE-33	2023.03.02	1 Year
14.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2023.01.07	1 Year
15.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2023.08.21	1 Year
16.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2023.04.13	1 Year
17.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Power Meter	Anritsu	ML2495A	2127005	2022. 12. 01	1 Year
2.	Power Meter	Anritsu	ML2495A	2127004	2022. 12. 07	1 Year
3.	Power Sensor	Anritsu	MA2411B	1911360	2022. 12. 07	1 Year
4.	Power Sensor	Anritsu	MA2411B	1911356	2022. 12. 01	1 Year
5.	Spectrum Analyzer	Keysight	N9020B	MY57120357	2023. 02. 02	1 Year
6.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2023. 04. 13	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.11

5.1.2. Shielded Room Setup Diagram

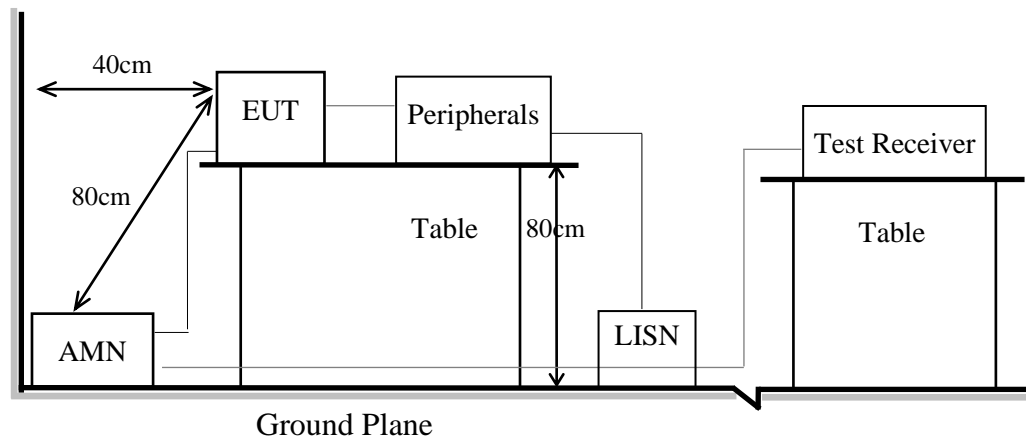

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.11


6.1.2. Setup Diagram for 9kHz-30MHz

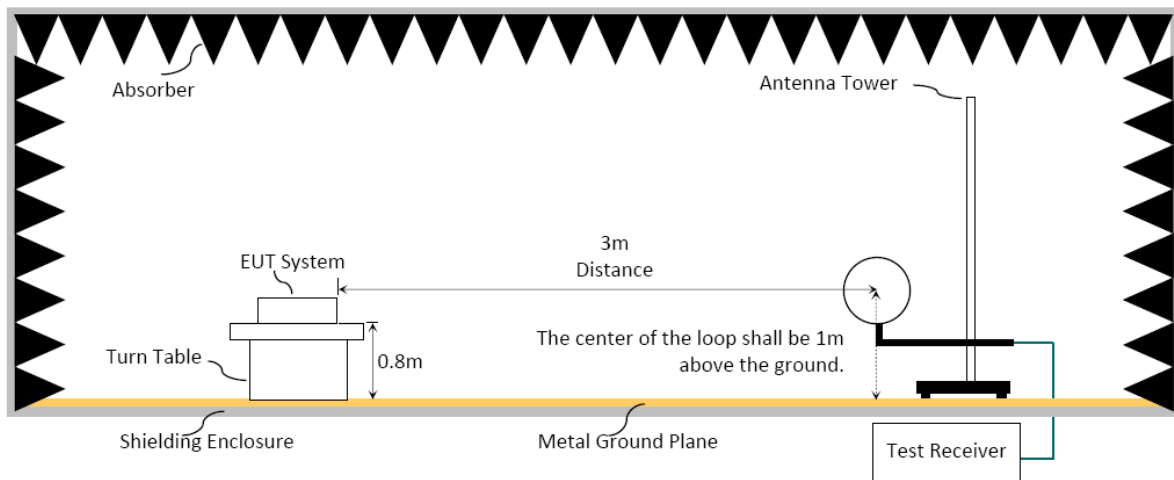

6.1.3. Setup Diagram for 30-1000MHz

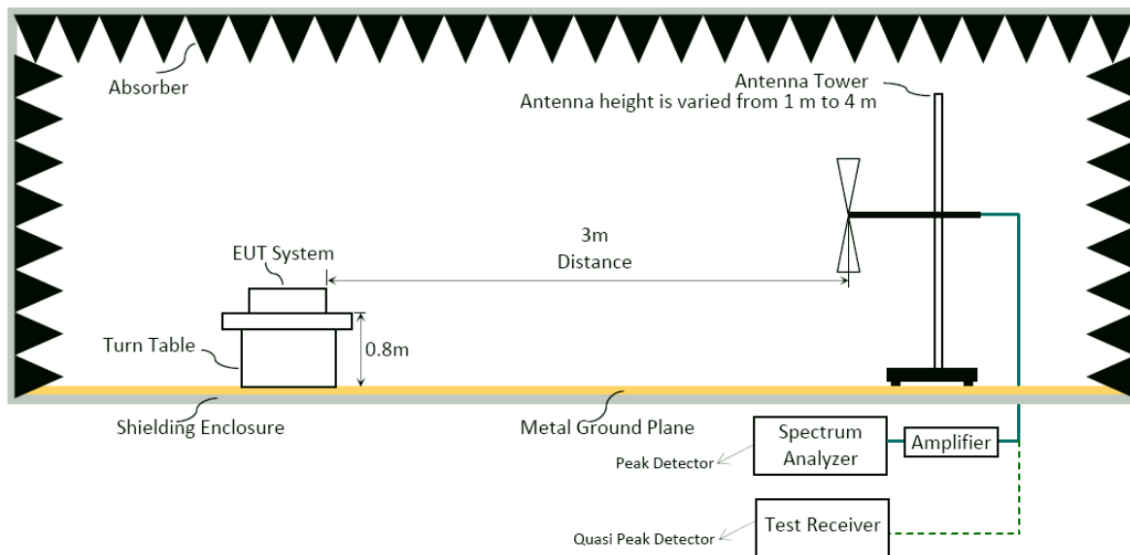

6.1.4. Setup Diagram for above 1GHz

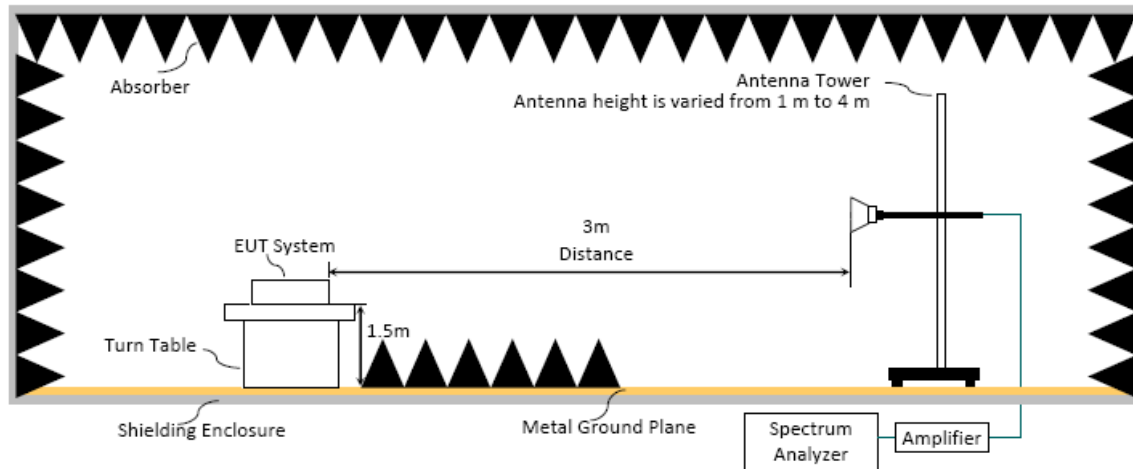

6.2. Radiated Emission Limits

Radiated emissions fall in restricted bands, as defined in Section 15.205 must be in compliance with the radiated emission limits specified in 15.209 as below.

6.2.1. General Limit

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)


- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.2.2. Limit for non-restricted frequency above 1 GHz


Frequency Band (MHz)	E.I.R.P. Limit	Field Strength Limit at 3 m
5150 to 5250	-27 dBm	68.2 dB μ V/m
5250 to 5350		68.2 dB μ V/m
5470 to 5725		68.2 dB μ V/m

Note: Field Strength at 3 m = E.I.R.P. + 95.2 dB

Frequency Band (MHz)	Field Strength Limit at 3 m
5725 to 5850	<input checked="" type="checkbox"/> 15.407(b)(4)(i) All emissions shall be limited to a level of 68.2 dB μ V/m at 75 MHz or more above or below the band edge increasing linearly to 105.2 dB μ V/m at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 110.8 dB μ V/m at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 122.2 dB μ V/m at the band edge.
	<input type="checkbox"/> 15.407(b)(4)(ii), compliance with the emission limits in § 15.247(d) shall be at least 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

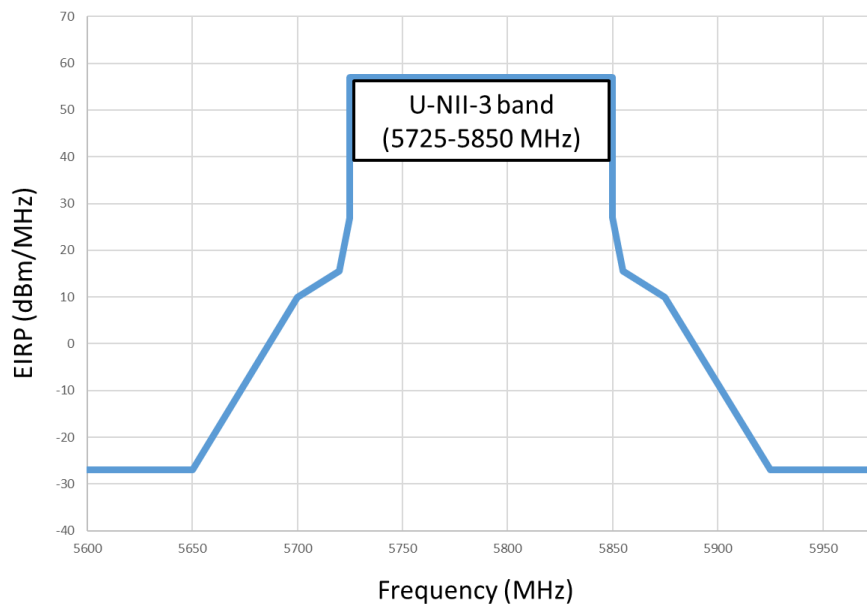

Frequency Band (MHz)	Field Strength Limit at 3 m	
5850 to 5895	<input type="checkbox"/>	15.407(b)(5)(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.
	<input checked="" type="checkbox"/>	15.407(b)(5)(ii) , For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.
	<input checked="" type="checkbox"/>	15.407(b)(5)(iii) , For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

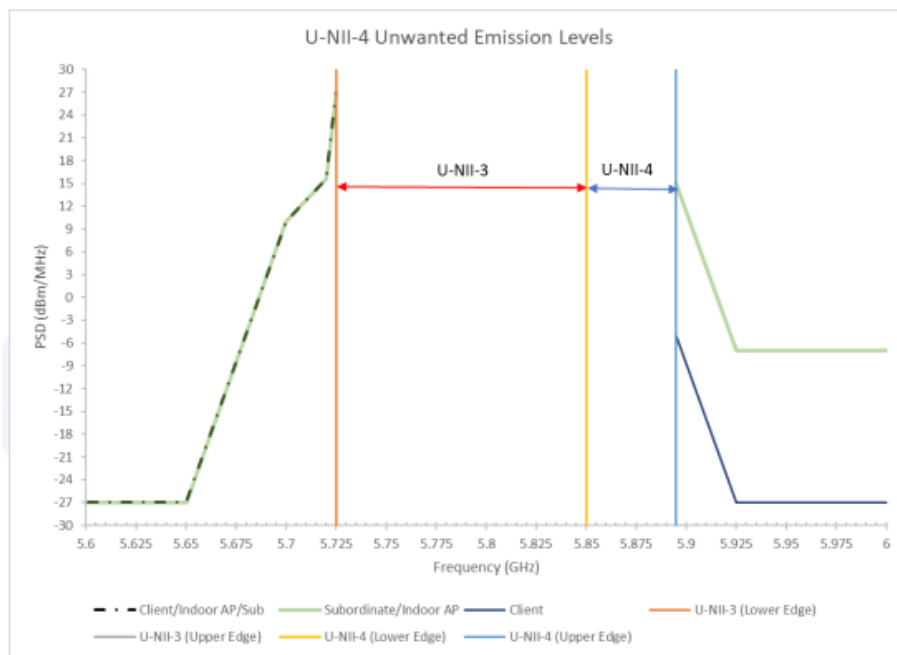

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1)RBW = 120kHz
- (2)VBW $\geq 3 \times$ RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic(up to 40 GHz):

Peak Detector:

- (1)RBW = 1MHz
- (2)VBW $\geq 3 \times$ RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:

Option 1:

(1) RBW = 1MHz

(2) VBW ≥ 1/ T. (Duty Cycle < 98%, when duty cycle presented in section 3.8)

Mode	VBW Setting (VBW ≥ 1/ T)
802.11a	510Hz
802.11ax-HE20 (RU Config 26)	1.5kHz
802.11ax-HE20 (RU Config 52)	750Hz
802.11ax-HE40 (RU Config 242)	750Hz
802.11ax-HE160 (RU Config 996)	820Hz

VBW = set VBW ≤ RBW / 100, but not less than 10Hz (Duty Cycle ≥ 98%, when duty cycle presented in section 3.8)

Mode	VBW Setting
802.11n-HT20	10Hz
802.11n-HT40	10Hz
802.11ac-VHT80	10Hz
802.11ac-VHT160	10Hz
802.11ax-HE20	10Hz
802.11ax-HE40	10Hz
802.11ax-HE80	10Hz
802.11ac-VHT160	10Hz
802.11ax-HE20 (RU Config 106)	10Hz
802.11ax-HE80 (RU Config 484)	10Hz

(4) Detector = Peak.

(5) Sweep time = auto.

(6) Trace mode = max hold.

(7) Allow sweeps to continue until the trace stabilizes.

Option 2:

Average Emission Level(dBμV/m) = Peak Emission Level(dBμV/m) + DCCF(dB).

6.4. Measurement Result Explanation

Peak Emission Level(dBμV/m) = Antenna Factor(dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading(dBμV).

Average Emission Level(dBμV/m) = Antenna Factor(dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading(dBμV).

Average Emission Level(dBμV/m) = Peak Emission Level(dBμV/m) + DCCF(dB)
 Duty Cycle Correction Factor (DCCF)(dB) = 20log(TX_{on}/TX_{on+off}) presented in section 3.8.


ERP(dBm) = Peak Emission Level(dBμV/m) - 95.2dB - 2.14dB

6.5. Test Results


Please refer to Appendix A.

7. MAXIMUM OUTPUT POWER

7.1. Block Diagram of Test Setup

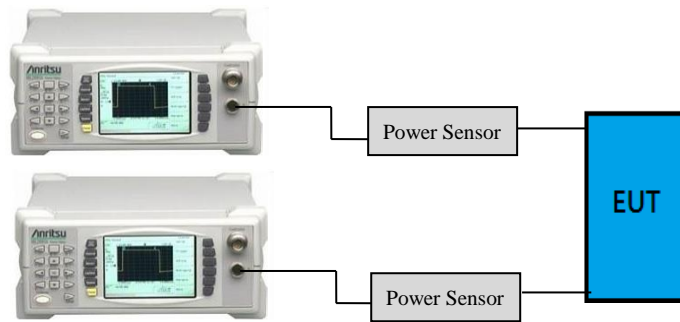

- For 802.11ac-VHT80/160, 802.11ax-HE160 modes only

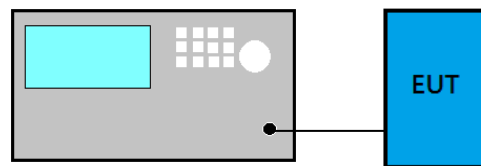

7.2. Specification Limits

Frequency Band (MHz)	Category	Limit
5150 to 5250	Outdoor Access Point	1 W(30 dBm)/ Max e.i.r.p. ≤125 mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon
	Fixed point-to-point Access Point	1 W(30 dBm)
	Indoor Access Point	1 W(30 dBm)
	Mobile and Portable client device	250 mW(24 dBm)
5250 to 5350	N/A	250 mW or 11 dBm + 10 log B ^{Note1}
5470 to 5725		250 mW or 11 dBm + 10 log B ^{Note1}
5725 to 5850	N/A	1 W(30 dBm)
5850 to 5895	indoor access point	4 W (36 dBm) (e.i.r.p.)
	client devices	1 W (30 dBm) (e.i.r.p.)
	subordinate device	4 W (36 dBm) (e.i.r.p.)

Note 1: B is the 26 dB emission bandwidth, which presented in section 7 and appendix A.1.

7.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 and KDB 291074 D02 EMC Measurement v01:

■ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.8 is < 98%.

■ **Method AVGSA-2 (Spectrum channel power) for 802.11ac-VHT80/160, 802.11ax-HE80/160 modes only**

- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW) \geq 3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.8 is < 98%.

7.4. Test Results

Please refer to Appendix A

8. DEVIATION TO TEST SPECIFICATIONS

【NONE】



*Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan*

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPDNDIX A

TEST DATA AND PLOTS


(Model: 15Z90ST)

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	7
A.2.3 Emissions in Non-restricted Frequency Bands.....	7
A.3 MAXIMUM OUTPUT POWER	8
A.3.1 Average Output Power	8
A.3.2 Measurement Plots	16

A.1 CONDUCTED EMISSION

Test Date	2023/11/21	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

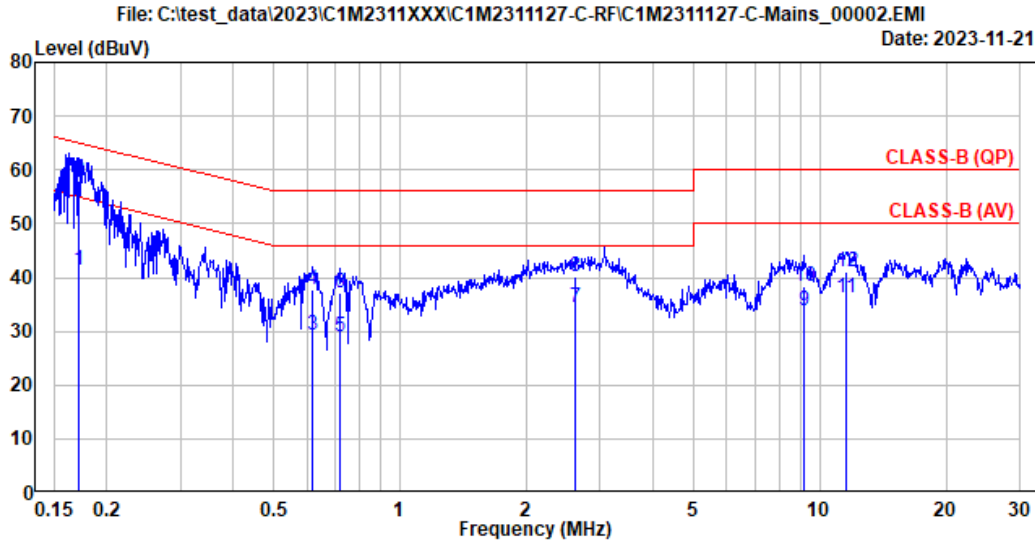

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90ST	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.172	10.30	0.03	9.85	21.15	41.33	54.88	13.55	Average
2	0.172	10.30	0.03	9.85	37.78	57.96	64.88	6.92	QP
3	0.621	10.28	0.03	9.85	9.19	29.35	46.00	16.65	Average
4	0.621	10.28	0.03	9.85	17.44	37.60	56.00	18.40	QP
5	0.717	10.29	0.04	9.85	8.92	29.10	46.00	16.90	Average
6	0.717	10.29	0.04	9.85	17.02	37.20	56.00	18.80	QP
7	2.622	10.34	0.07	9.86	14.30	34.57	46.00	11.43	Average
8	2.622	10.34	0.07	9.86	19.78	40.05	56.00	15.95	QP
9	9.161	10.55	0.13	9.88	13.19	33.75	50.00	16.25	Average
10	9.161	10.55	0.13	9.88	17.82	38.38	60.00	21.62	QP
11	11.579	10.66	0.15	9.90	15.44	36.15	50.00	13.85	Average
12	11.579	10.66	0.15	9.90	20.31	41.02	60.00	18.98	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2023/11/21	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

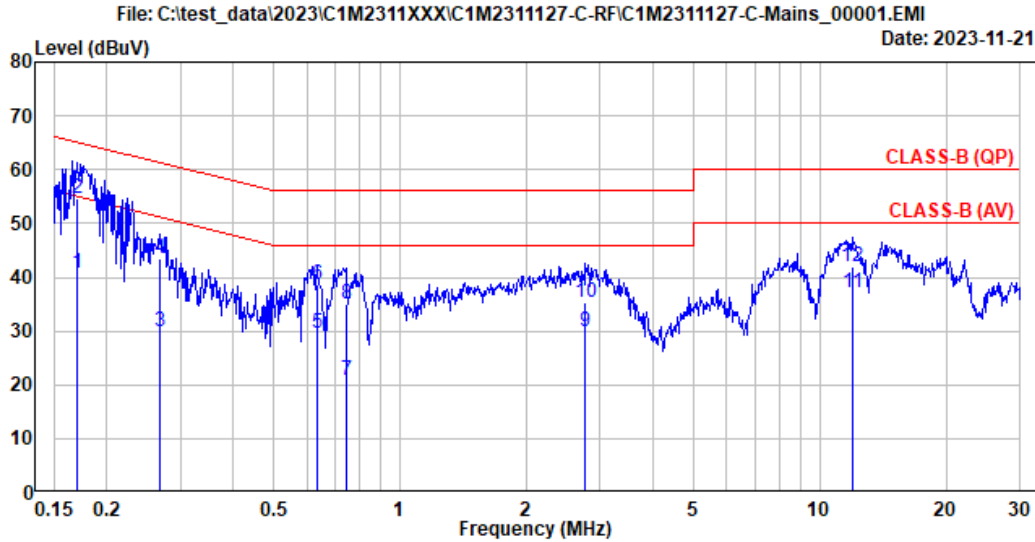

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90ST	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.171	10.22	0.03	9.85	20.79	40.89	54.92	14.03	Average
2	0.171	10.22	0.03	9.85	34.42	54.52	64.92	10.40	QP
3	0.269	10.22	0.03	9.85	9.89	29.99	51.16	21.17	Average
4	0.269	10.22	0.03	9.85	23.23	43.33	61.16	17.83	QP
5	0.633	10.23	0.04	9.85	9.36	29.48	46.00	16.52	Average
6	0.633	10.23	0.04	9.85	18.48	38.60	56.00	17.40	QP
7	0.743	10.23	0.04	9.85	0.67	20.79	46.00	25.21	Average
8	0.743	10.23	0.04	9.85	15.05	35.17	56.00	20.83	QP
9	2.770	10.26	0.07	9.86	9.76	29.95	46.00	16.05	Average
10	2.770	10.26	0.07	9.86	15.05	35.24	56.00	20.76	QP
11	11.931	10.48	0.15	9.90	16.60	37.13	50.00	12.87	Average
12	11.931	10.48	0.15	9.90	21.53	42.06	60.00	17.94	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

A.2 RADIATED EMISSION

Test Date	2023/11/15	Temp./Hum.	22°C/61%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu


A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz


Mode	802.11ax-HE40	U-NII Band	4
RU Configuration	242/61	Frequency	TX 5835MHz

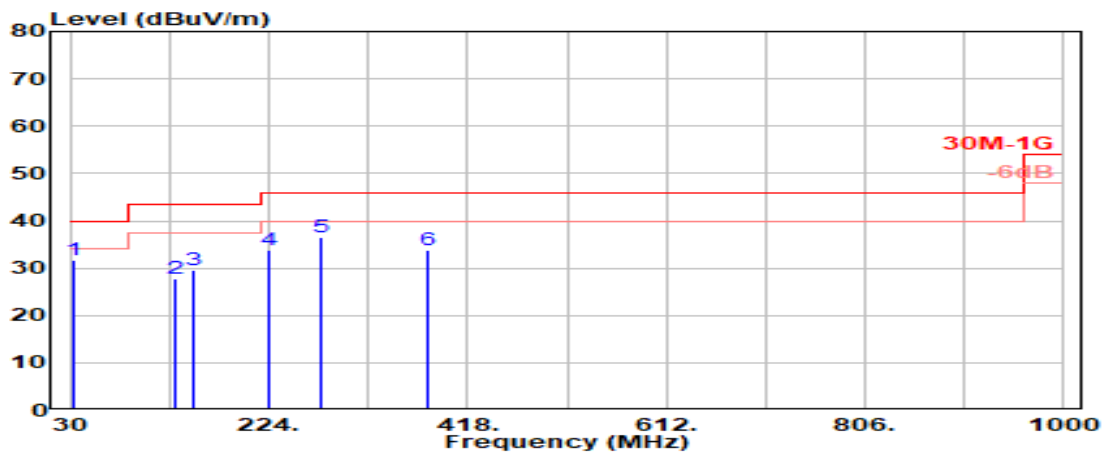

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.233	22.77	1.27	26.52	34.31	31.83	40.00	8.17	Peak
131.850	17.44	2.67	26.11	33.86	27.85	43.50	15.65	Peak
151.250	16.48	2.89	26.01	36.25	29.62	43.50	13.88	Peak
224.808	16.77	3.65	25.77	39.30	33.95	46.00	12.05	Peak
275.733	18.53	4.13	25.69	39.55	36.53	46.00	9.47	Peak
378.392	21.05	5.29	26.35	33.91	33.90	46.00	12.10	Peak

Mode	802.11ax-HE40	U-NII Band	4
RU Configuration	242/61	Frequency	TX 5835MHz

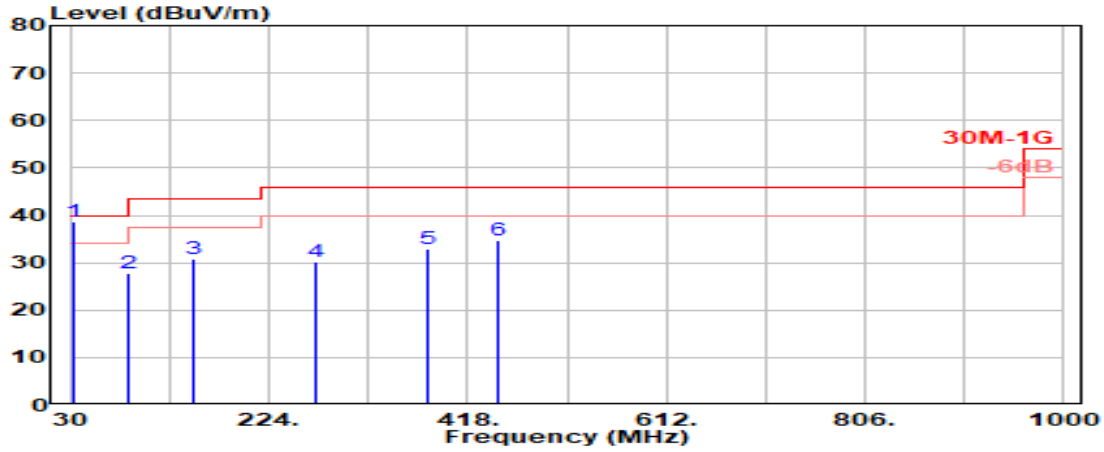


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.425	23.06	1.25	0.00	14.27	38.58	40.00	1.42	QP
85.775	14.10	2.12	26.35	37.96	27.83	40.00	12.17	Peak
149.633	16.59	2.87	26.02	37.23	30.67	43.50	12.83	Peak
270.883	18.45	4.09	25.70	33.34	30.18	46.00	15.82	Peak
378.392	21.05	5.29	26.35	32.87	32.86	46.00	13.14	Peak
448.717	22.36	5.97	26.84	33.33	34.82	46.00	11.18	Peak


A.2.1.3 Frequency Above 1 GHz to 10th harmonics
Band Edge:

Mode	802.11ax-HE60	U-NII Band	4
RU Configuration	996/S67	Frequency	TX 5815MHz

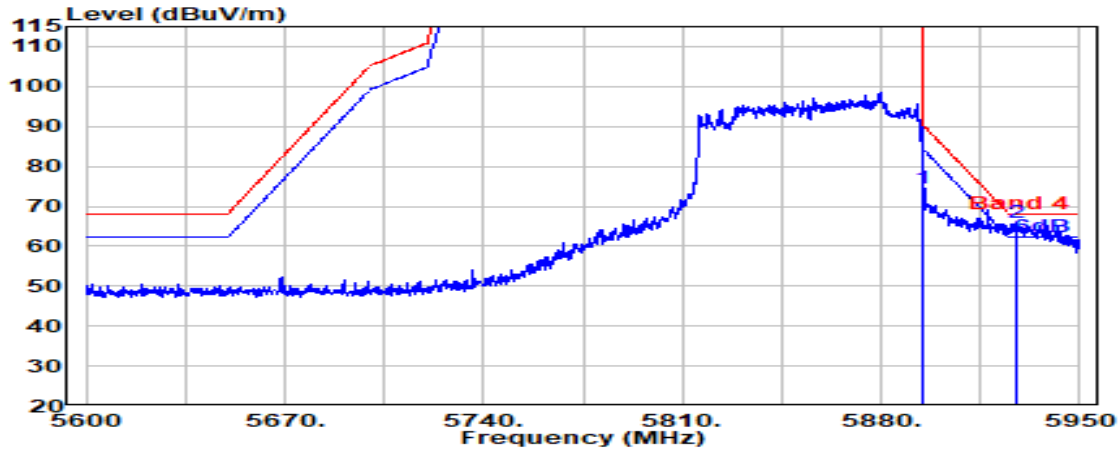

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.38	65.95	74.64	90.20	15.56	Peak
5927.469	34.21	8.99	34.40	57.03	65.83	68.20	2.37	Peak

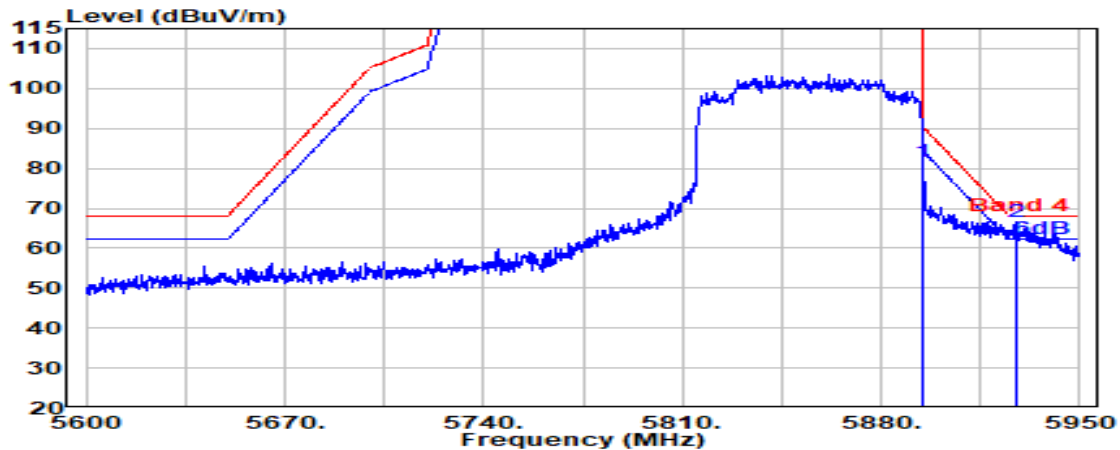

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.094	34.10	8.97	34.38	73.05	81.74	90.13	8.39	Peak
5927.469	34.21	8.99	34.40	57.68	66.48	68.20	1.72	Peak

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11ax-HE40	U-NII Band	4
		Frequency	TX 5835MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11670.000	39.34	13.51	34.56	32.96	51.24	54.00	2.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11670.000	39.34	13.51	34.56	33.35	51.64	54.00	2.36	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 MAXIMUM OUTPUT POWER

Test Date	2023/11/15 ~ 24	Temp./Hum.	23 ~ 24°C/51 ~ 55%
Cable Loss	1.0dB	Tested By	Harry Huang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Average Output Power

● SPOT Check

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Antenna Gain (dBi)		Max Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		AUX	Main		AUX	Main		
		AUX	Main	AUX	Main							
U-NII Band 4	5845	16.47	16.42	16.425	16.464	19.02	18.74	0.092	1.10	1.30	20.21	30
	5865	16.46	16.37	16.406	16.425	18.85	18.33		1.10	1.30	20.04	
	5885	16.42	16.40	16.426	16.436	17.18	16.94		1.10	1.30	18.37	

Note: 1. The results have been included cable loss.

2. Max Average Output Power (EIRP) = Max of average output power (AUX or Main) (dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

3. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		AUX	Main				
		AUX	Main	AUX	Main						
U-NII Band 4	5845	17.65	17.69	17.656	17.606	15.59	15.73	N/A	1.20	19.87	30
	5865	17.66	17.69	17.638	17.648	15.89	15.64		1.20	19.98	
	5885	17.67	17.64	17.623	17.652	13.92	13.92		1.20	18.13	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$5850\text{MHz: Directional gain} = 10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	36.37	36.40	36.036	36.001	19.55	19.65	N/A	1.20	23.81	30
	5865	36.37	36.43	36.027	36.035	17.20	17.23		1.20	21.43	

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5855	76.26	76.28	75.069	75.270	17.89	17.86	N/A	1.20	22.09	30

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5815	156.10	156.10	153.31	152.96	14.94	14.74	N/A	1.20	19.05	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] \text{ dBi}$$

$$5850\text{MHz: Directional gain} = 10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	18.86	19.02	18.846	18.884	15.90	15.92	N/A	1.20	20.12	30
	5865	18.80	19.01	18.898	18.855	16.16	15.84		1.20	20.21	
	5885	19.03	18.90	18.875	18.888	13.64	13.74		1.20	17.90	

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	38.03	37.94	37.492	37.425	19.34	19.31	N/A	1.20	23.54	30
	5875	37.99	37.95	37.503	37.473	16.83	16.97		1.20	21.11	

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5855	77.80	77.87	76.676	76.632	17.31	17.13	N/A	1.20	21.43	30

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5815	157.50	157.40	154.77	154.37	14.96	14.79	N/A	1.20	19.09	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G^1/10} + 10^{G^2/10} + \dots + 10^{G^N/10})/N_{\text{ANT}}] \text{ dBi}$$

$$5850\text{MHz: Directional gain} = 10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5845	26/0	18.86	19.02	18.846	18.884	5.23	5.04	0.372	1.20	9.72	30	
			52/37	18.86	19.02	18.846	18.884	14.93	15.26	0.132	1.20		19.44
			106/53	18.86	19.02	18.846	18.884	17.25	17.10	N/A	1.20		21.39
U-NII Band 4	5885	26/8	19.03	18.90	18.875	18.888	4.68	4.32	0.372	1.20	9.09		
			52/40	19.03	18.90	18.875	18.888	6.80	6.42	0.132	1.20		10.96
			106/54	19.03	18.90	18.875	18.888	11.11	10.93	N/A	1.20		15.23
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5835	242/61	38.03	37.94	37.492	37.425	19.61	19.70	0.137	1.20	24.00	30	
			5875	242/62	37.99	37.95	37.503	37.473	13.74	13.85	0.137		1.20
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5855	242/61	77.80	77.87	76.676	76.632	19.02	19.18	N/A	1.20	23.31	30	
			242/62	77.80	77.87	76.676	76.632	16.87	17.05	N/A	1.20		21.17
Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5815	996/67	157.50	157.40	154.77	154.37	18.17	18.47	0.128	1.20	22.66	30	
			996/S67	157.50	157.40	154.77	154.37	18.72	18.72	0.128	1.20		23.06

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$5850\text{MHz: Directional gain} = 10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

● **Original FCC ID: BEJNT-15Z90RT Power**

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Antenna Gain (dBi)		Max Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB)		Occupied (99%) Bandwidth		AUX	Main		AUX	Main		
		AUX	Main	AUX	Main							
U-NII Band 4	5845	16.47	16.42	16.425	16.464	19.04	19.03	N/A	1.10	1.30	20.33	30
	5865	16.46	16.37	16.406	16.425	19.06	18.70		1.10	1.30	20.16	
	5885	16.42	16.40	16.426	16.436	17.25	17.18		1.10	1.30	18.48	

Note: 1. The results have been included cable loss.

2. Max Average Output Power (EIRP) = Max of average output power (AUX or Main) (dBm)+ Antenna Gain (dBi) + Duty Cycle Factor (dB) when duty cycle is less than 98%.

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		AUX	Main				
		AUX	Main	AUX	Main						
U-NII Band 4	5845	17.65	17.69	17.656	17.606	16.08	15.83	N/A	1.20	20.17	30
	5865	17.66	17.69	17.638	17.648	16.17	16.04		1.20	20.32	
	5885	17.67	17.64	17.623	17.652	13.96	13.98		1.20	18.18	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] \text{ dBi}$$

$$5850\text{MHz: Directional gain} = 10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	36.37	36.40	36.036	36.001	19.72	19.75	N/A	1.20	23.95	30
	5865	36.37	36.43	36.027	36.035	17.47	17.46		1.20	21.68	

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5855	76.26	76.28	75.069	75.270	18.06	17.95	N/A	1.20	22.22	30

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5815	156.10	156.10	153.31	152.96	15.78	15.49	N/A	1.20	19.85	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

5850MHz: Directional gain = $10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	18.86	19.02	18.846	18.884	16.10	16.01	N/A	1.20	20.27	30
	5865	18.80	19.01	18.898	18.855	16.33	16.22		1.20	20.49	
	5885	19.03	18.90	18.875	18.888	14.08	14.10		1.60	18.70	

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5845	38.03	37.94	37.492	37.425	19.48	19.50	N/A	1.20	23.70	30
	5875	37.99	37.95	37.503	37.473	17.28	17.20		1.20	21.45	

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5855	77.80	77.87	76.676	76.632	17.82	17.76	N/A	1.20	22.00	30

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Directional gain (dBi) ^{Note 3}	Total Average Output Power (EIRP) ^{Note 2}	Limit (EIRP)
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		AUX	Main	AUX	Main	AUX	Main				
U-NII Band 4	5815	157.50	157.40	154.77	154.37	15.57	15.30	0.092	1.20	19.74	30

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G^1/10} + 10^{G^2/10} + \dots + 10^{G^N/10})/N_{\text{ANT}}] \text{ dBi}$$

$$5850\text{MHz: Directional gain} = 10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5845	26/0	18.86	19.02	18.846	18.884	5.36	5.43	0.269	1.20	9.87	30	
			52/37	18.86	19.02	18.846	18.884	15.25	15.42	0.132	1.20		19.68
			106/53	18.86	19.02	18.846	18.884	17.72	17.52	N/A	1.20		21.83
U-NII Band 4	5885	26/8	19.03	18.90	18.875	18.888	4.72	4.62	0.269	1.20	9.15		
			52/40	19.03	18.90	18.875	18.888	7.05	6.91	0.132	1.20		11.32
			106/54	19.03	18.90	18.875	18.888	11.55	11.43	N/A	1.20		15.70
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5835	242/61	38.03	37.94	37.492	37.425	20.02	20.03	0.150	1.20	24.39	30	
	5875	242/62	37.99	37.95	37.503	37.473	14.16	14.15	0.150	1.20	18.52		
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5855	242/61	77.80	77.87	76.676	76.632	19.45	19.42	0.092	1.20	23.74	30	
			242/62	77.80	77.87	76.676	76.632	17.21	17.12	0.092	1.20		21.47
Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Direction al Gain (dBi) ^{Note3}	Total Average Output Power (EIRP) ^{Note2}	Limit (EIRP)	
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 4	5815	996/67	157.50	157.40	154.77	154.37	19.19	19.18	0.191	1.20	23.59	30	
			996/S67	157.50	157.40	154.77	154.37	19.08	19.05	0.191	1.20		23.47

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total E.I.R.P.(dBm) = Sum to individual output power (dBm)+ Directional gain (dBi) + duty cycle factor(dB) when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then




$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$




$$5850\text{MHz: Directional gain} = 10 \log[(10^{1.3/10} + 10^{1.1/10})/2] = 1.20\text{dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

A.3.2 Measurement Plots

- Maximum Output Power

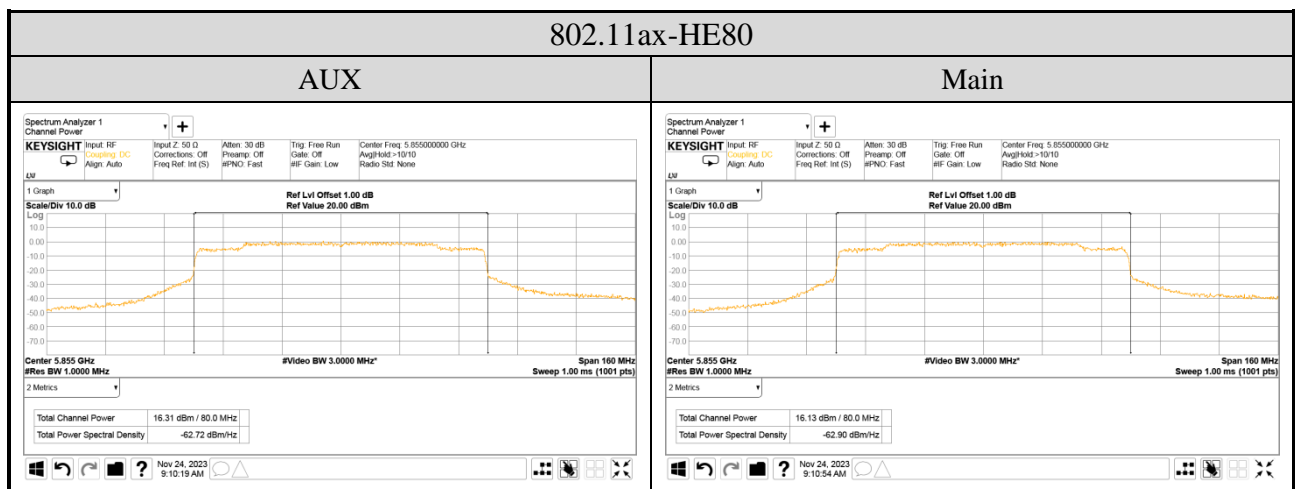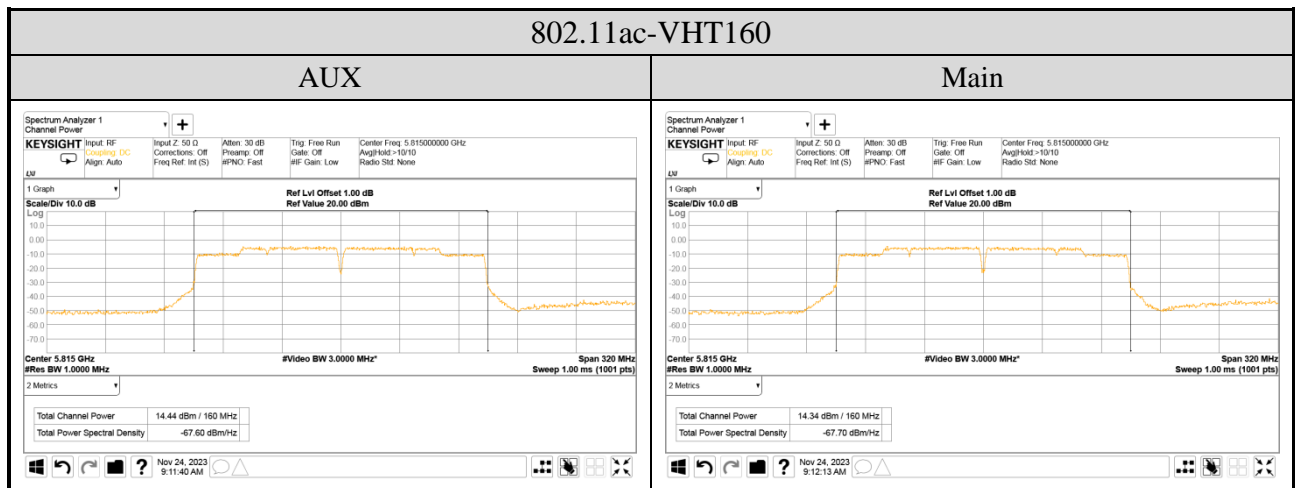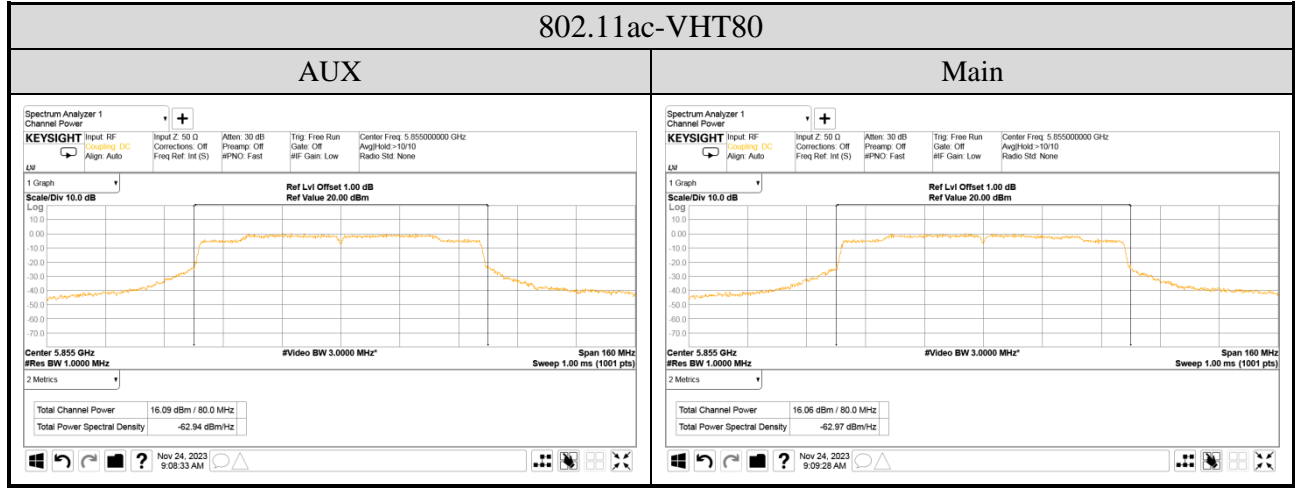

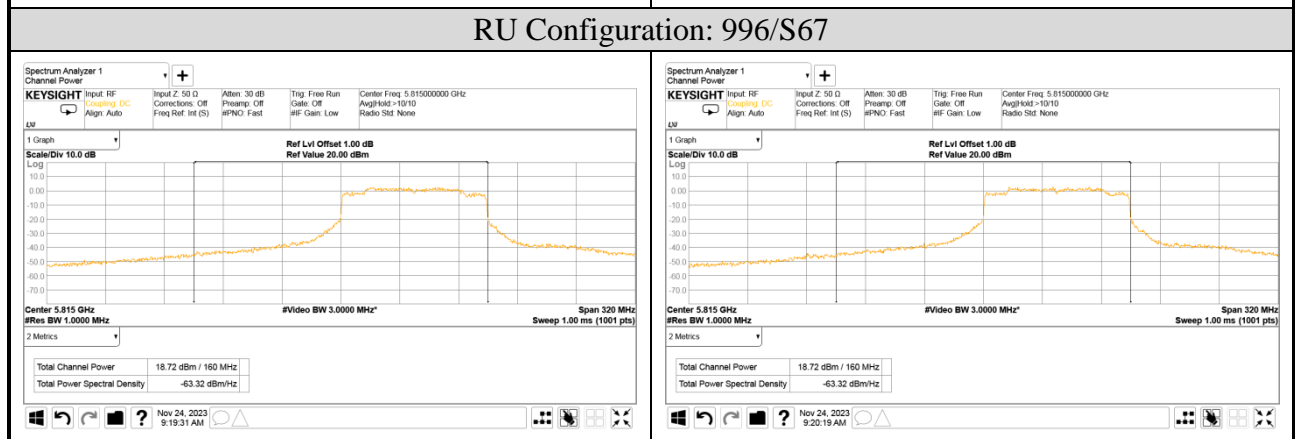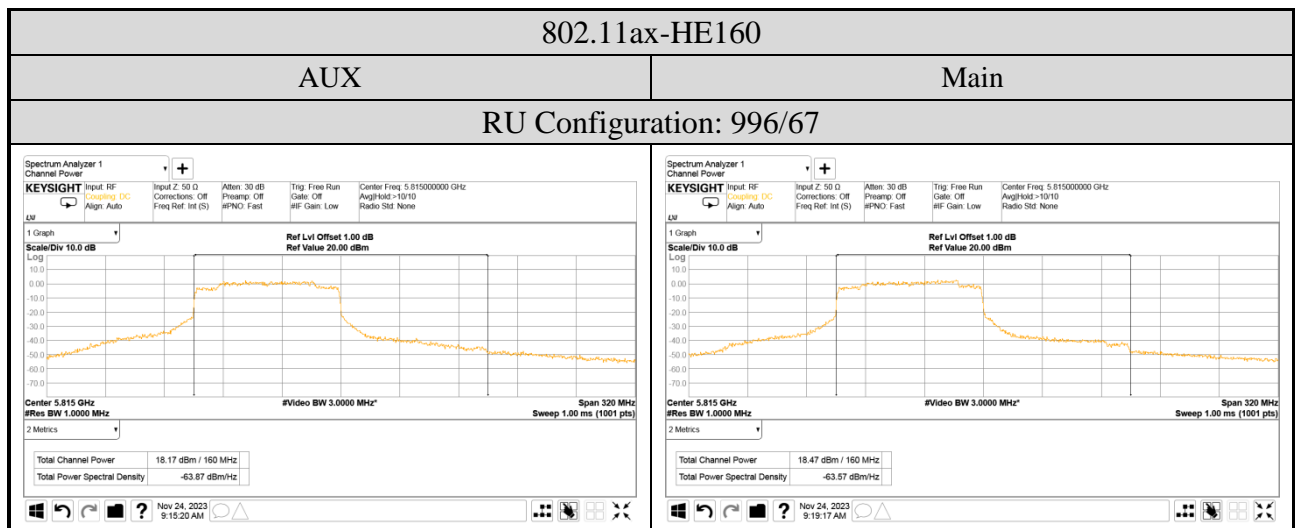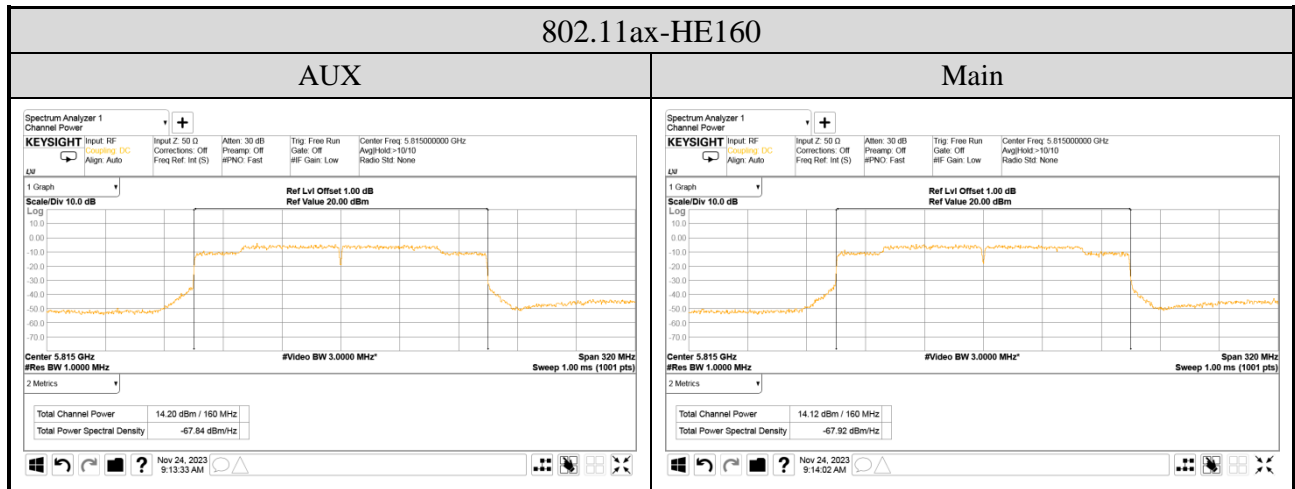



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS

(Model: 15Z90ST)