


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	55
A.2.3 Emissions in Non-restricted Frequency Bands.....	65
A.3 MAXIMUM POWER SPECTRAL DENSITY	66
A.3.1 Power Spectral Density Result	66
A.3.2 Measurement Plots	68
A.4 MAXIMUM CONDUCTED OUTPUT POWER	84
A.4.1 Conducted Output Power Result	84
A.4.2 Measurement Plots	97
A.5 EMISSION/OCCUPIED BANDWIDTH	114
A.5.1 Emission/Occupied Bandwidth Result	114
A.5.2 Measurement Plots	115
A.6 UNDESIRABLE EMISSION LIMITS: SPURIOUS EMISSION (CONDUCTED)	129
A.7 IN-BAND EMISSION (CHANNEL MASK)	132
A.8 CONTENTION BASED PROTOCOL	148
A.8.1 Contention-based Protocol.....	148
A.8.2 Measurement Plots	151

A.1 CONDUCTED EMISSION

Test Date	2023/03/13	Temp./Hum.	23°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Ken Yang

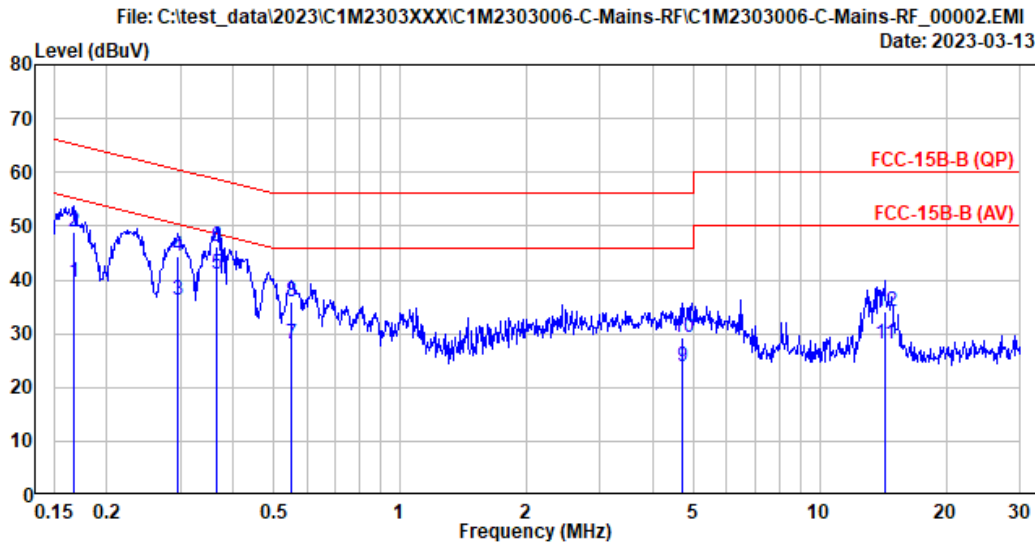


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 23°C/51%	Test Rating	: 120Vac/60Hz
EUT Model	: 16U75R	Engineer	: Ken Yang
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.167	10.33	0.03	9.85	19.23	39.44	55.13	15.69	Average
2	0.167	10.33	0.03	9.85	28.64	48.85	65.13	16.28	QP
3	0.295	10.32	0.03	9.85	16.02	36.22	50.37	14.15	Average
4	0.295	10.32	0.03	9.85	24.25	44.45	60.37	15.92	QP
5	0.364	10.32	0.03	9.85	20.85	41.05	48.63	7.58	Average
6	0.364	10.32	0.03	9.85	25.97	46.17	58.63	12.46	QP
7	0.551	10.33	0.03	9.85	7.89	28.10	46.00	17.90	Average
8	0.551	10.33	0.03	9.85	15.68	35.89	56.00	20.11	QP
9	4.721	10.44	0.09	9.87	3.44	23.84	46.00	22.16	Average
10	4.721	10.44	0.09	9.87	8.94	29.34	56.00	26.66	QP
11	14.275	10.85	0.17	9.91	7.12	28.05	50.00	21.95	Average
12	14.275	10.85	0.17	9.91	13.05	33.98	60.00	26.02	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

Test Date	2023/03/13	Temp./Hum.	23°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Ken Yang

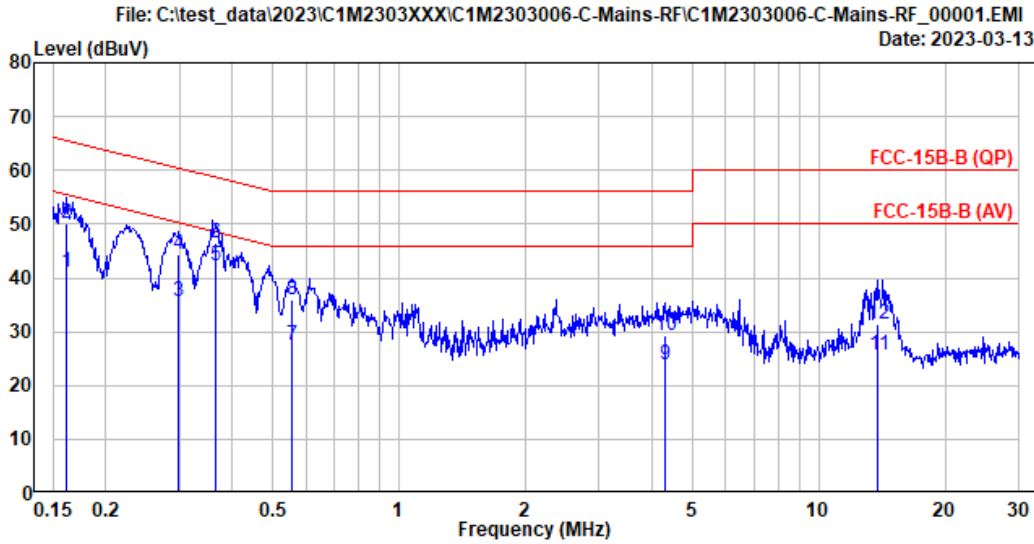

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)	Phase	: Line
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)	Test Rating	: 120Vac/60Hz
Limit	: FCC-15B-B (QP)	Engineer	: Ken Yang
Environment	: 23°C/51%		
EUT Model	: 16U75R		
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.162	10.22	0.03	9.85	21.00	41.10	55.38	14.28	Average
2	0.162	10.22	0.03	9.85	29.87	49.97	65.38	15.41	QP
3	0.298	10.22	0.03	9.85	15.66	35.76	50.29	14.53	Average
4	0.298	10.22	0.03	9.85	24.42	44.52	60.29	15.77	QP
5	0.366	10.22	0.03	9.85	22.20	42.30	48.59	6.29	Average
6	0.366	10.22	0.03	9.85	26.31	46.41	58.59	12.18	QP
7	0.556	10.22	0.03	9.85	7.47	27.57	46.00	18.43	Average
8	0.556	10.22	0.03	9.85	15.90	36.00	56.00	20.00	QP
9	4.294	10.29	0.08	9.86	3.48	23.71	46.00	22.29	Average
10	4.294	10.29	0.08	9.86	9.14	29.37	56.00	26.63	QP
11	13.855	10.52	0.16	9.91	5.18	25.77	50.00	24.23	Average
12	13.855	10.52	0.16	9.91	10.87	31.46	60.00	28.54	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

A.2 RADIATED EMISSION

Test Date	2023/03/07 ~ 13	Temp./Hum.	18 ~ 22°C/52 ~65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu


A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz


Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

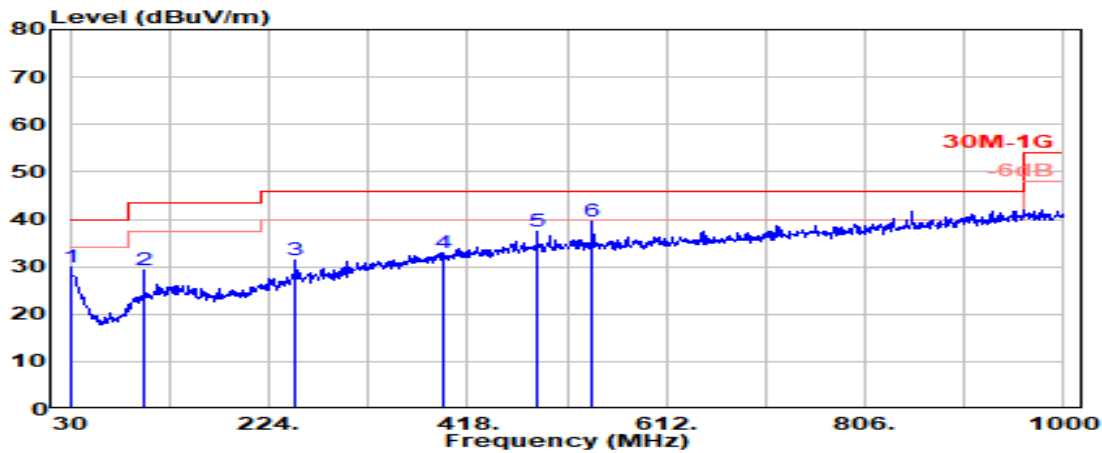

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.08	1.43	26.49	31.76	29.78	40.00	10.22	Peak
101.780	16.96	2.63	26.28	36.02	29.34	43.50	14.16	Peak
250.190	18.49	4.26	25.69	34.24	31.30	46.00	14.70	Peak
393.750	21.49	5.86	26.39	32.05	33.01	46.00	12.99	Peak
485.900	23.25	6.65	27.04	34.61	37.48	46.00	8.52	Peak
540.220	23.86	6.90	27.24	36.00	39.53	46.00	6.47	Peak

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

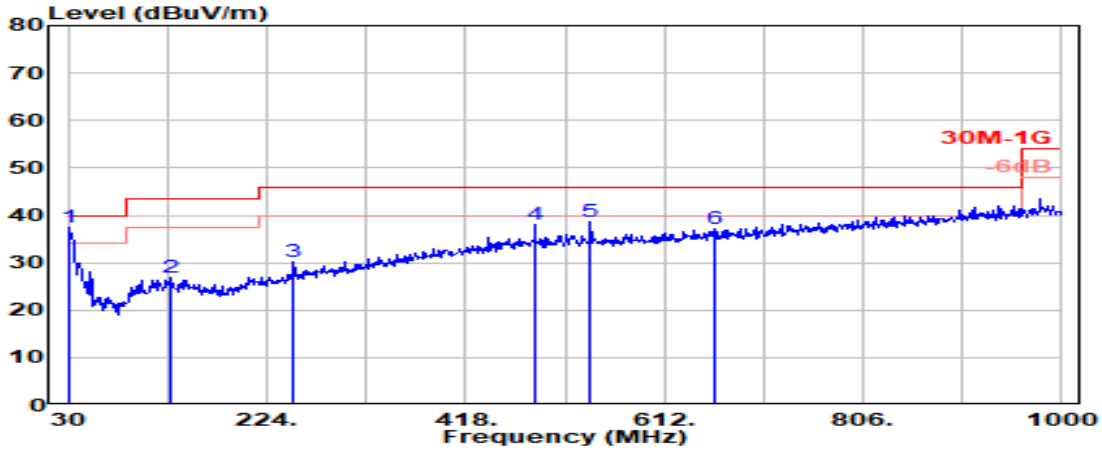


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	39.17	37.37	40.00	2.63	Peak
128.940	17.78	2.96	26.11	32.26	26.90	43.50	16.60	Peak
250.190	18.49	4.26	25.69	33.00	30.06	46.00	15.94	Peak
485.900	23.25	6.65	27.04	35.04	37.91	46.00	8.09	Peak
540.220	23.86	6.90	27.24	35.21	38.73	46.00	7.27	Peak
660.500	24.61	7.43	27.42	32.50	37.12	46.00	8.88	Peak


A.2.1.3 Band Edge
 ● OFDM Modulation

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

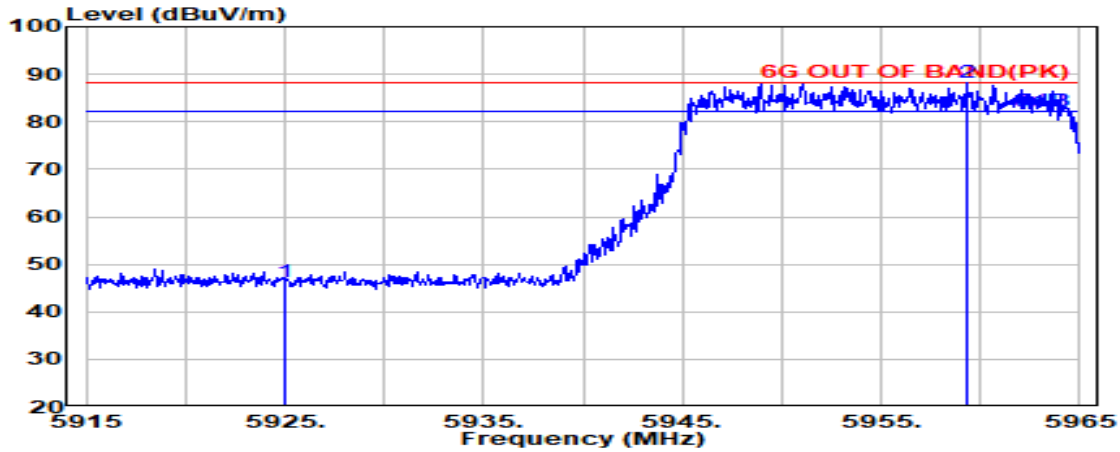

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.52	46.17	88.20	42.03	Peak
@ 5959.300	35.66	9.31	34.41	77.60	88.16	---	---	Peak

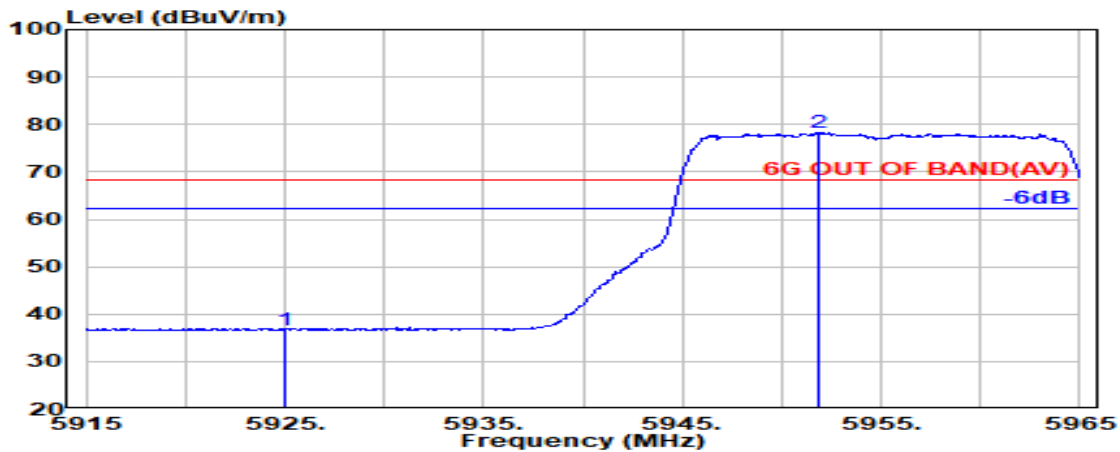


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.04	36.68	68.20	31.52	Average
@ 5951.900	35.69	9.31	34.41	67.72	78.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

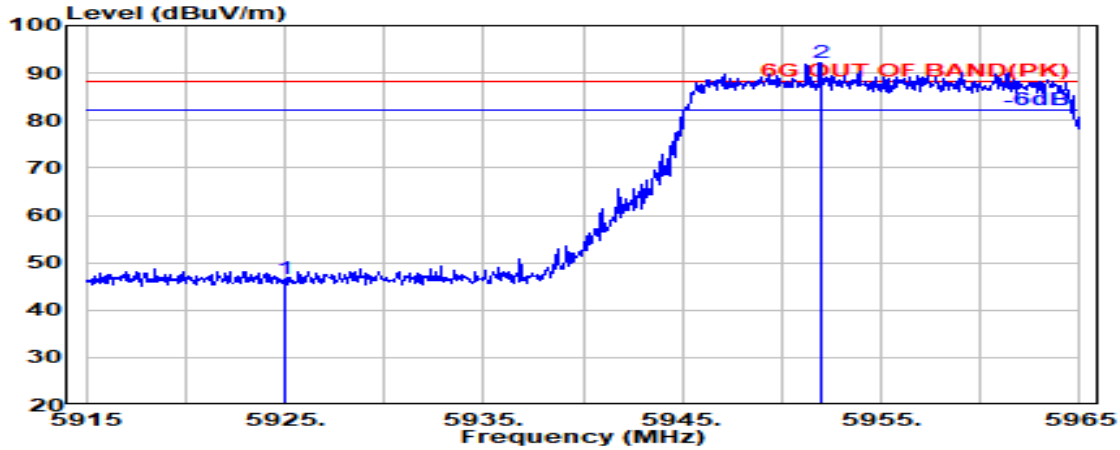

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.96	46.60	88.20	41.60	Peak
@ 5951.950	35.69	9.31	34.41	81.56	92.15	---	---	Peak

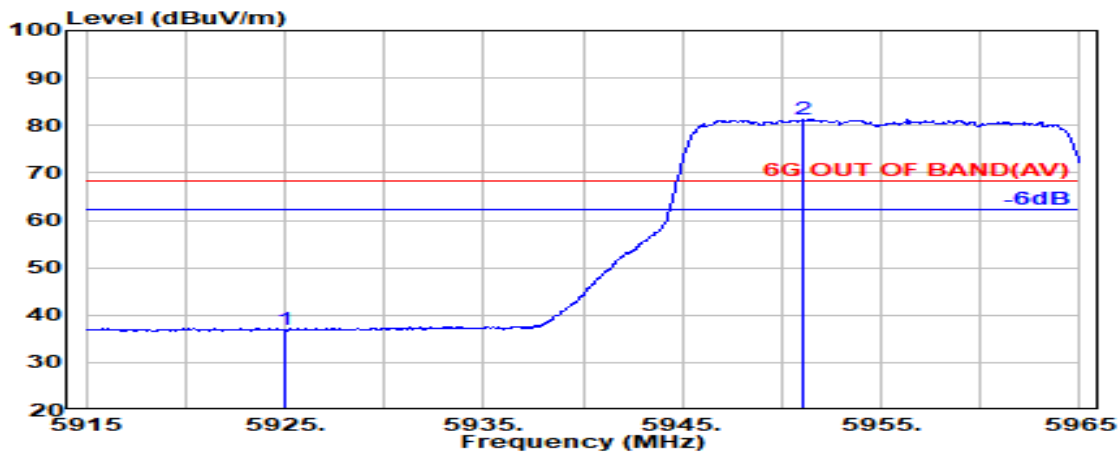


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.24	36.89	68.20	31.31	Average
@ 5951.050	35.70	9.31	34.41	70.67	81.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

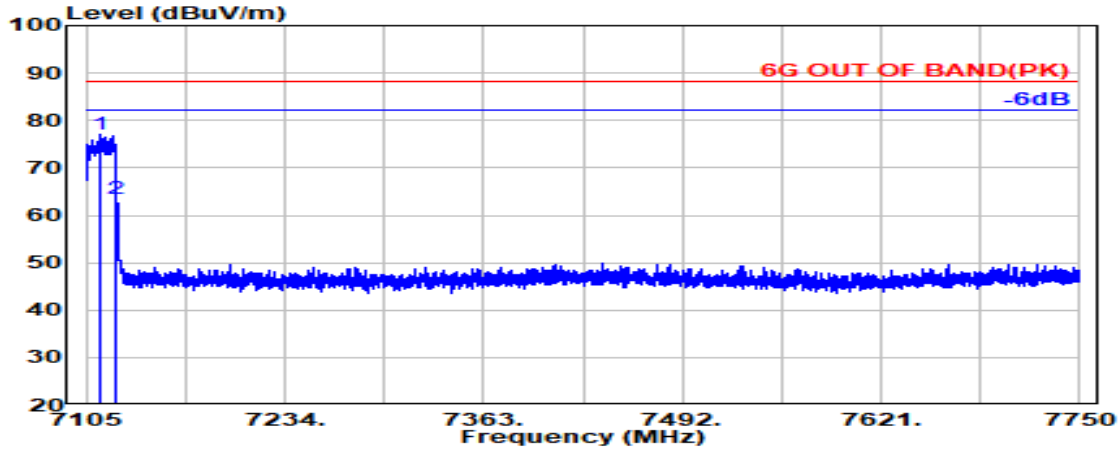

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7114.700	35.56	9.81	34.55	66.34	77.17	---	---	Peak
7125.000	35.60	9.82	34.55	52.49	63.36	88.20	24.84	Peak

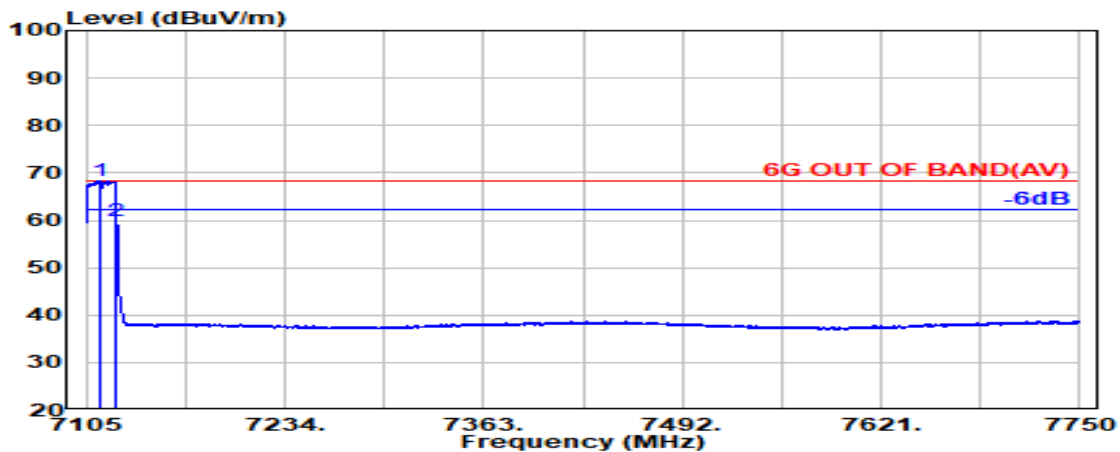


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7113.300	35.55	9.81	34.55	57.41	68.23	---	---	Average
7125.000	35.60	9.82	34.55	49.09	59.96	68.20	8.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

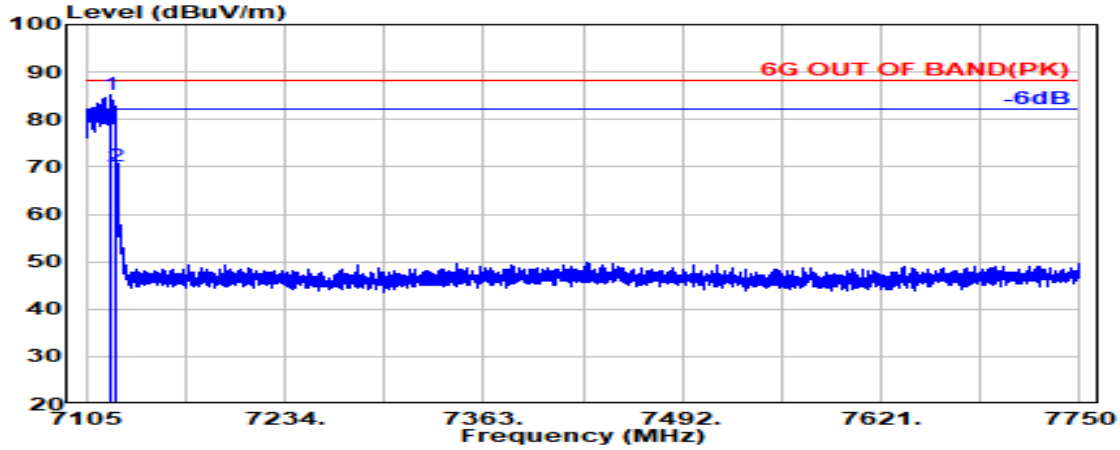

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7120.700	35.58	9.82	34.55	74.24	85.10	---	---	Peak
7125.000	35.60	9.82	34.55	59.15	70.02	88.20	18.18	Peak

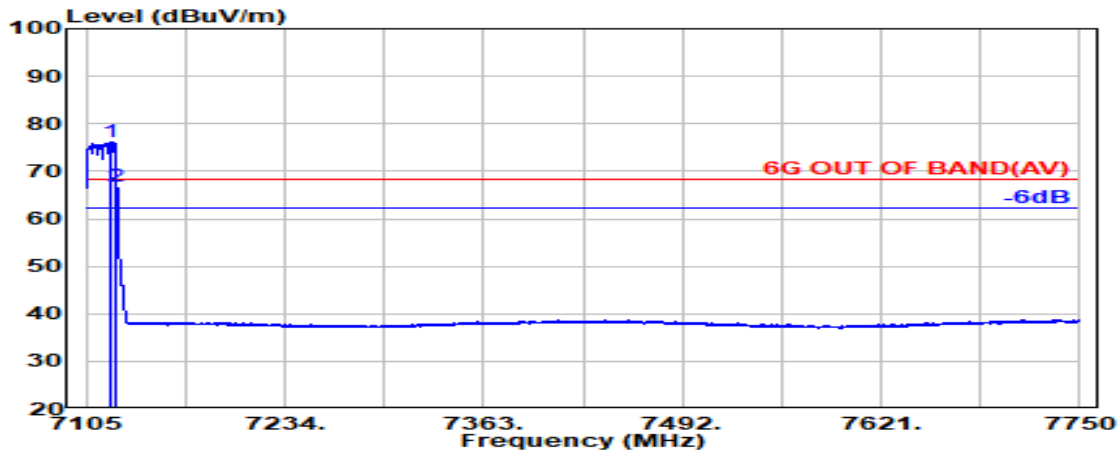


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7120.200	35.58	9.82	34.55	65.29	76.14	---	---	Average
7125.000	35.60	9.82	34.55	55.78	66.65	68.20	1.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

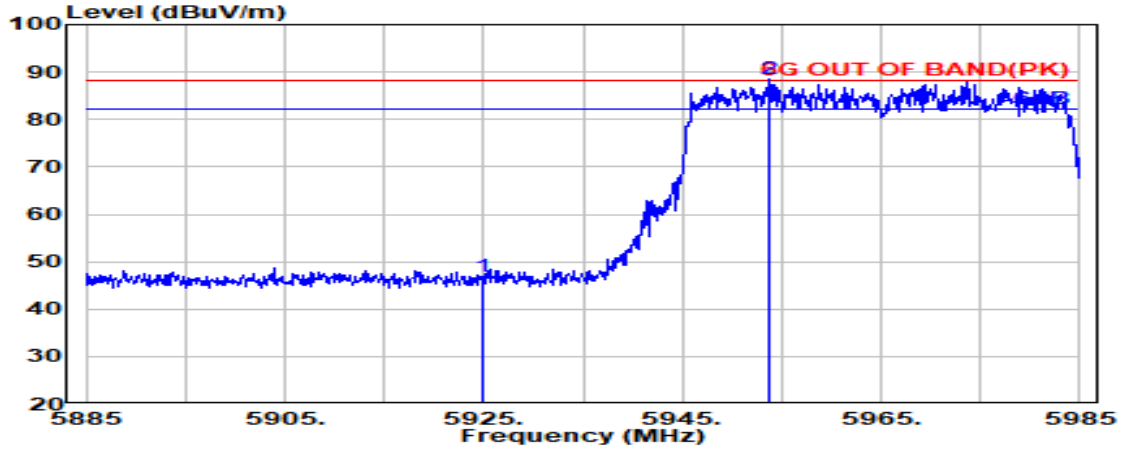

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	36.35	47.00	88.20	41.20	Peak
@ 5953.700	35.69	9.31	34.41	77.93	88.52	---	---	Peak

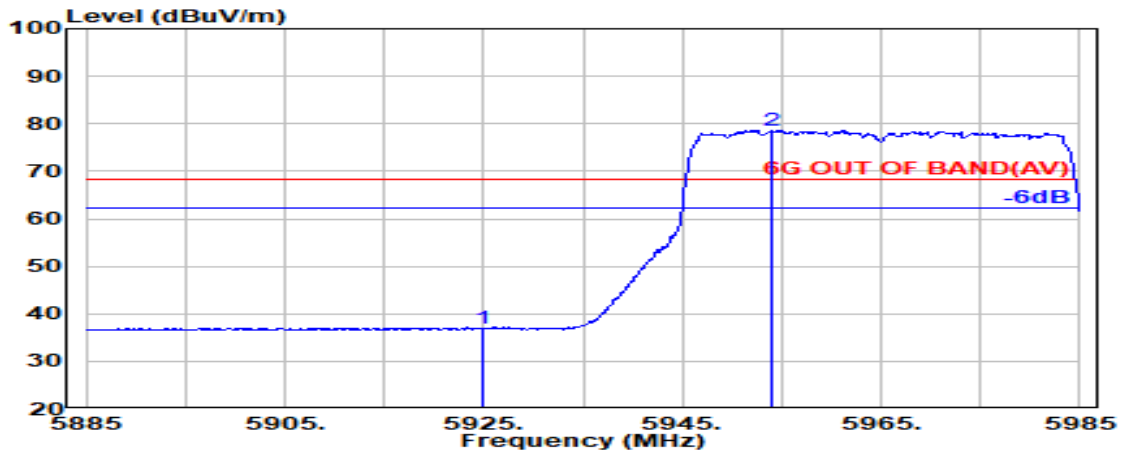


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.14	36.79	68.20	31.41	Average
@ 5954.100	35.68	9.31	34.41	68.04	78.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

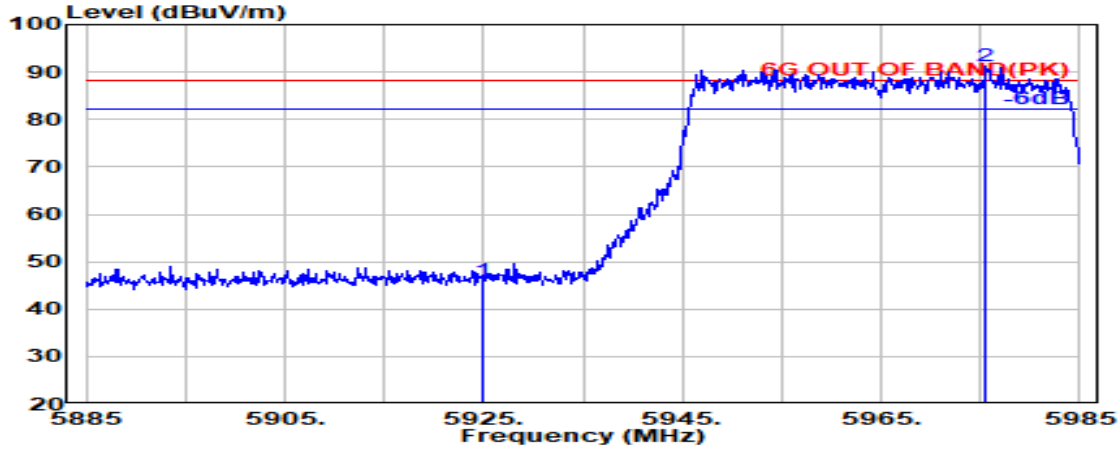

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.39	46.04	88.20	42.16	Peak
@ 5975.600	35.60	9.32	34.42	80.75	91.25	---	---	Peak

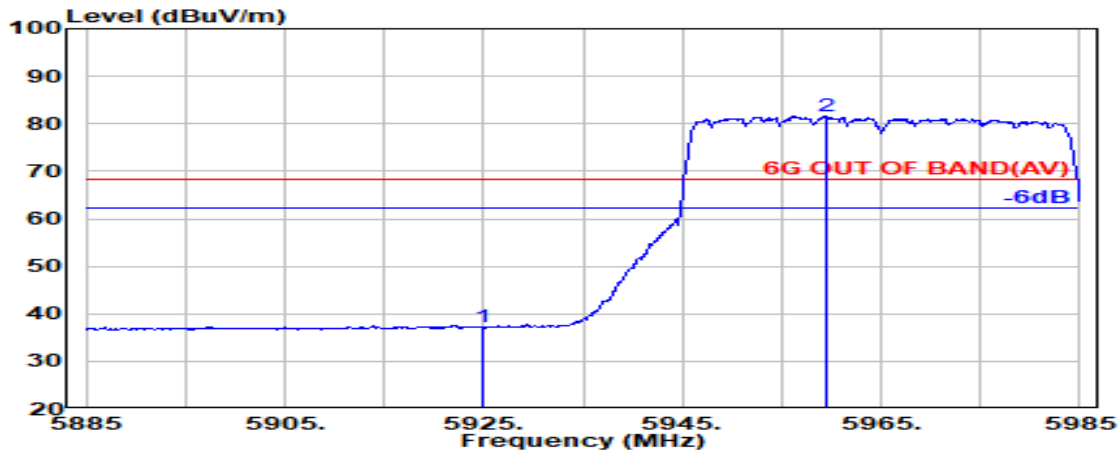


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.54	37.19	68.20	31.01	Average
@ 5959.400	35.66	9.31	34.41	70.98	81.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

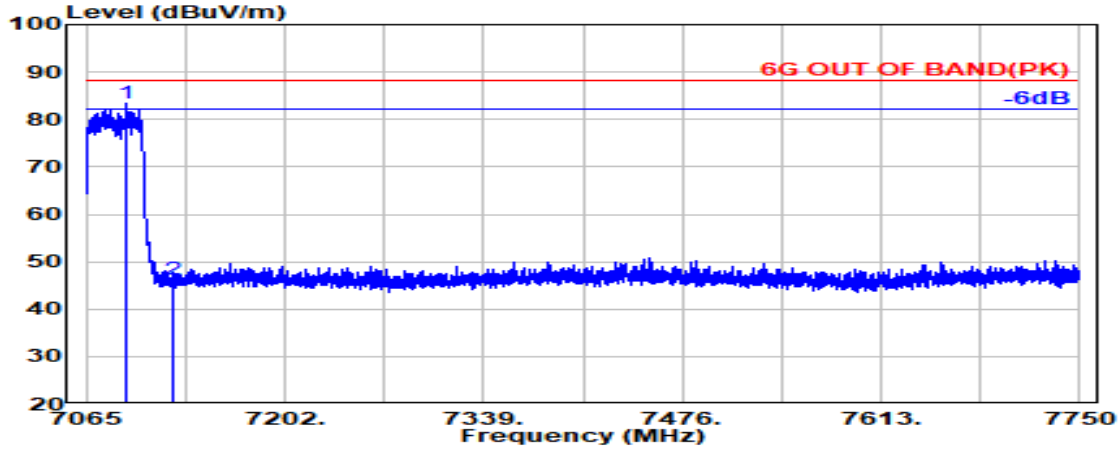

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7092.500	35.51	9.79	34.53	72.76	83.53	---	---	Peak
7125.000	35.60	9.82	34.55	35.42	46.29	88.20	41.91	Peak

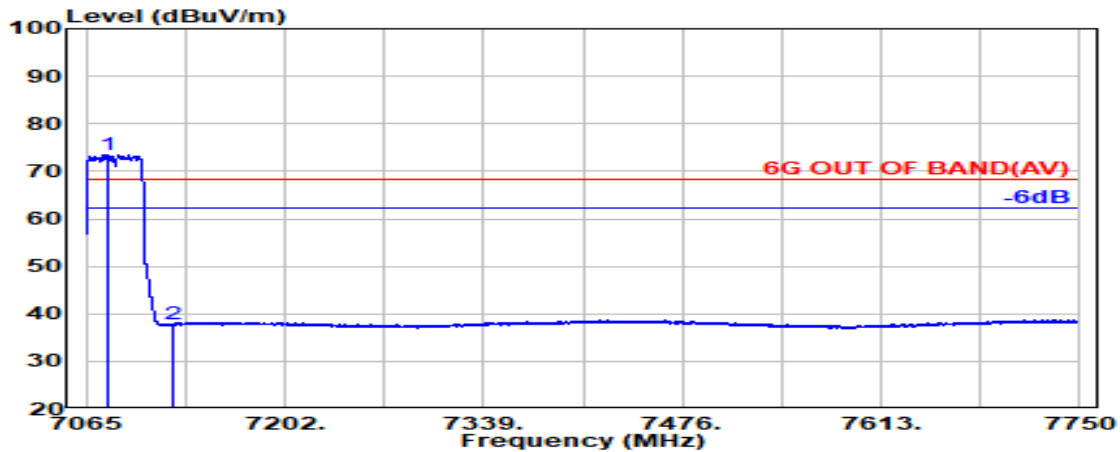


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7079.800	35.54	9.78	34.53	62.74	73.54	---	---	Average
7125.000	35.60	9.82	34.55	26.91	37.79	68.20	30.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

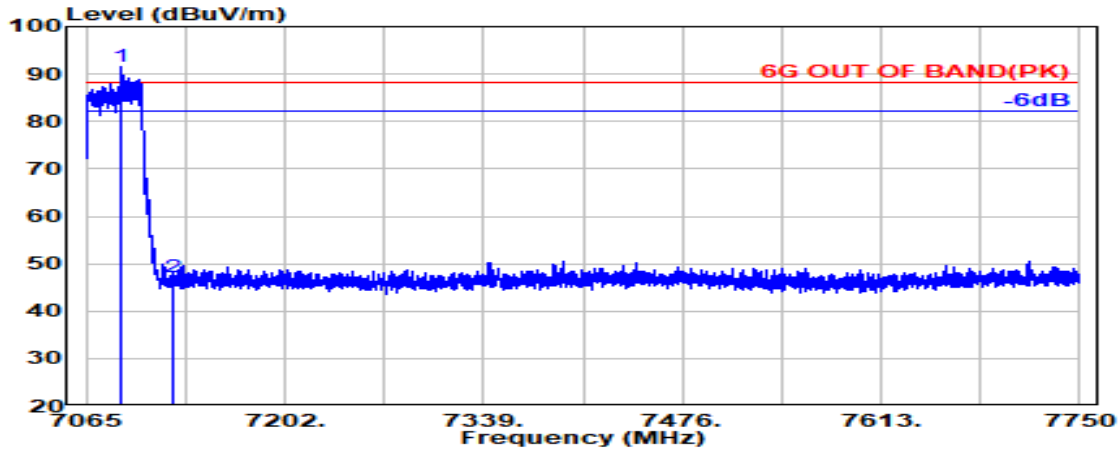

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7088.700	35.52	9.79	34.53	80.89	91.67	---	---	Peak
7125.000	35.60	9.82	34.55	36.21	47.08	88.20	41.12	Peak

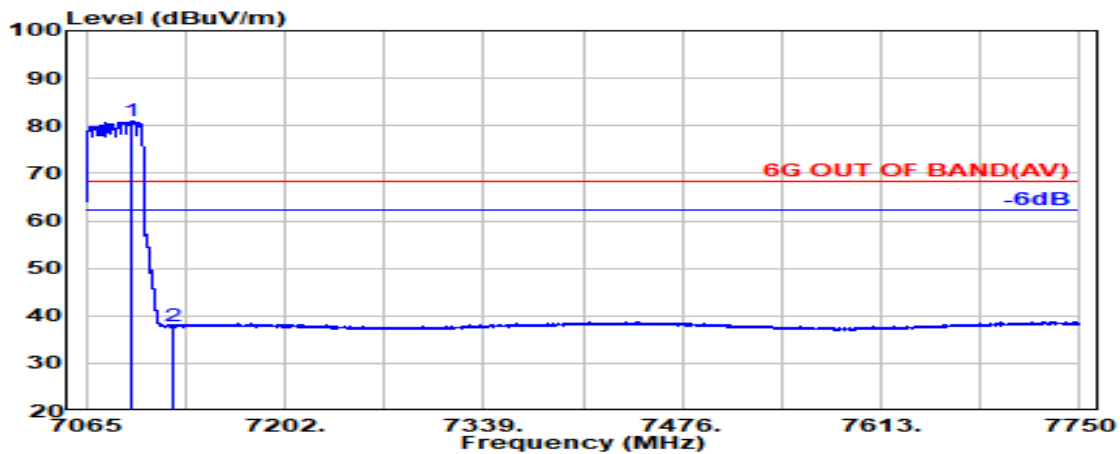


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7095.700	35.51	9.80	34.54	70.24	81.01	---	---	Average
7125.000	35.60	9.82	34.55	26.88	37.75	68.20	30.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

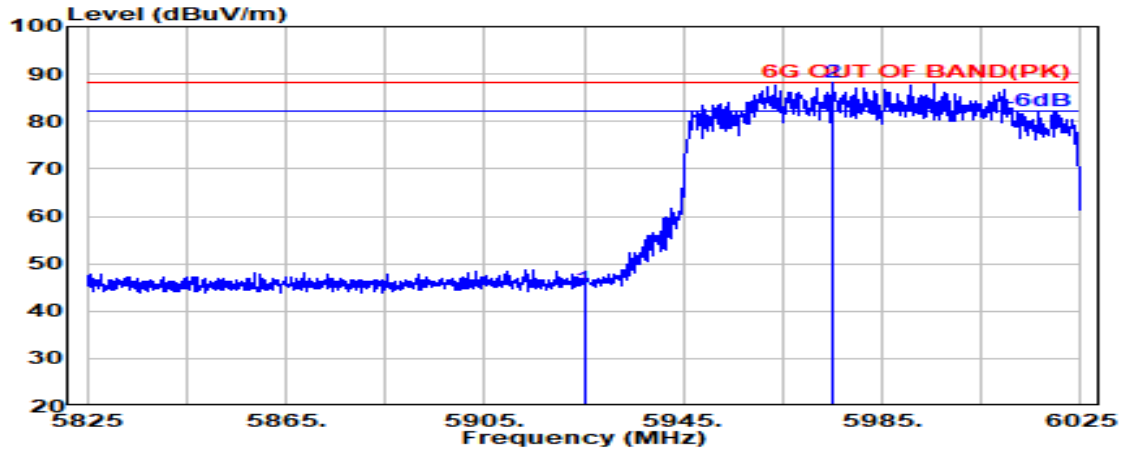

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.24	44.89	88.20	43.31	Peak
@ 5975.000	35.60	9.32	34.42	77.58	88.08	---	---	Peak

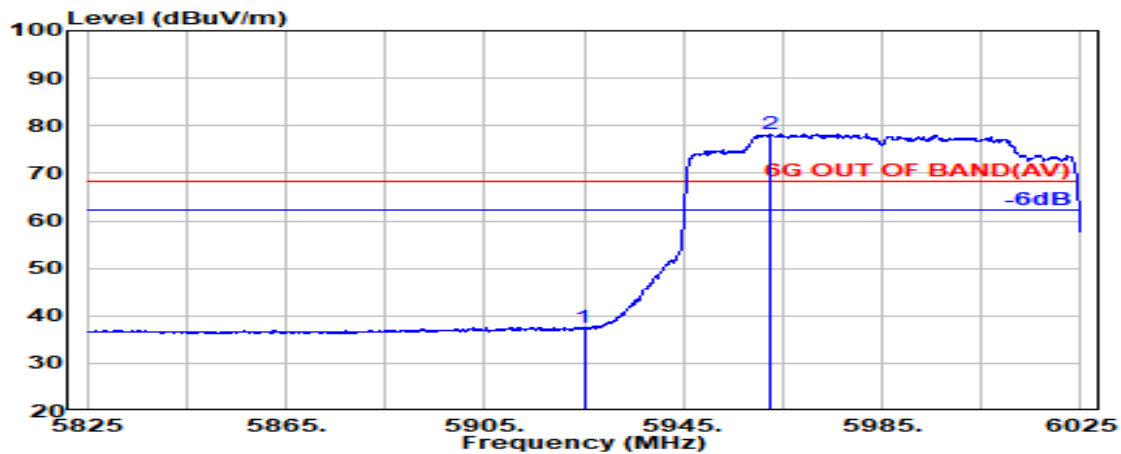


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.93	37.58	68.20	30.62	Average
@ 5962.700	35.65	9.31	34.41	67.64	78.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

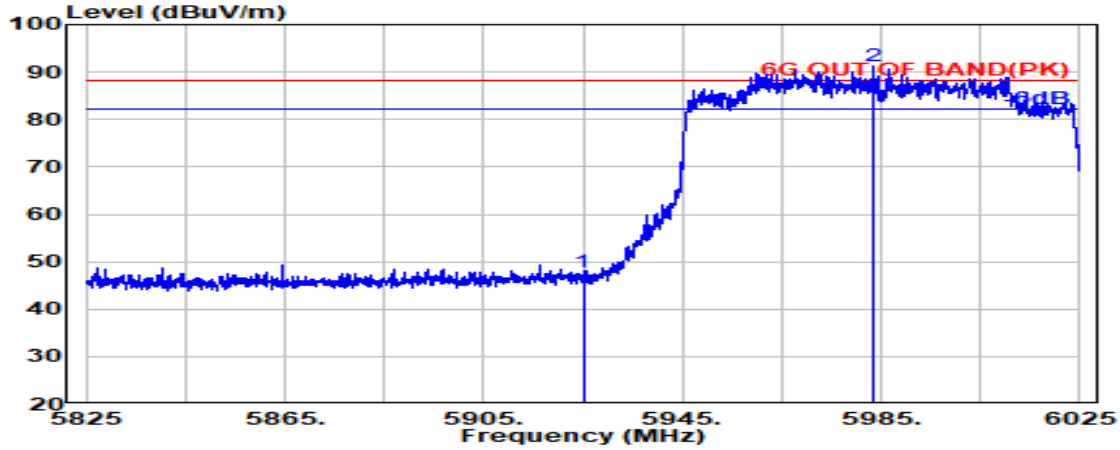

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	37.26	47.91	88.20	40.29	Peak
@ 5983.500	35.57	9.32	34.42	80.73	91.20	---	---	Peak

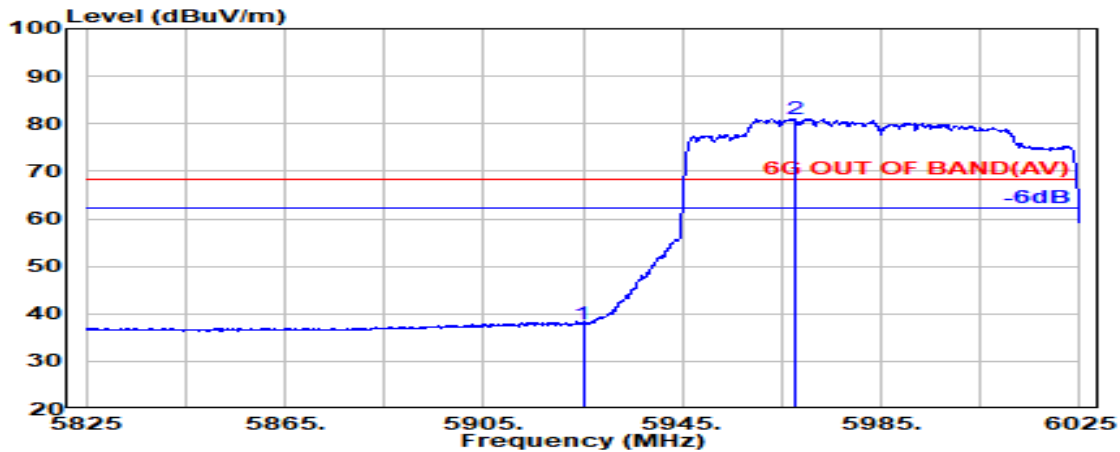


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	27.19	37.84	68.20	30.36	Average
@ 5967.600	35.63	9.31	34.42	70.51	81.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

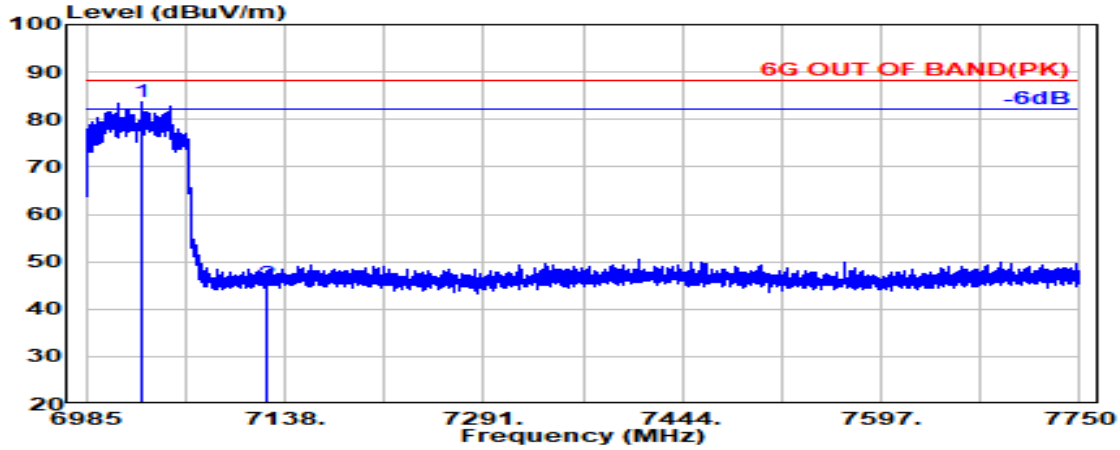

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7027.100	35.78	9.73	34.50	72.58	83.61	---	---	Peak
7125.000	35.60	9.82	34.55	34.60	45.47	88.20	42.73	Peak

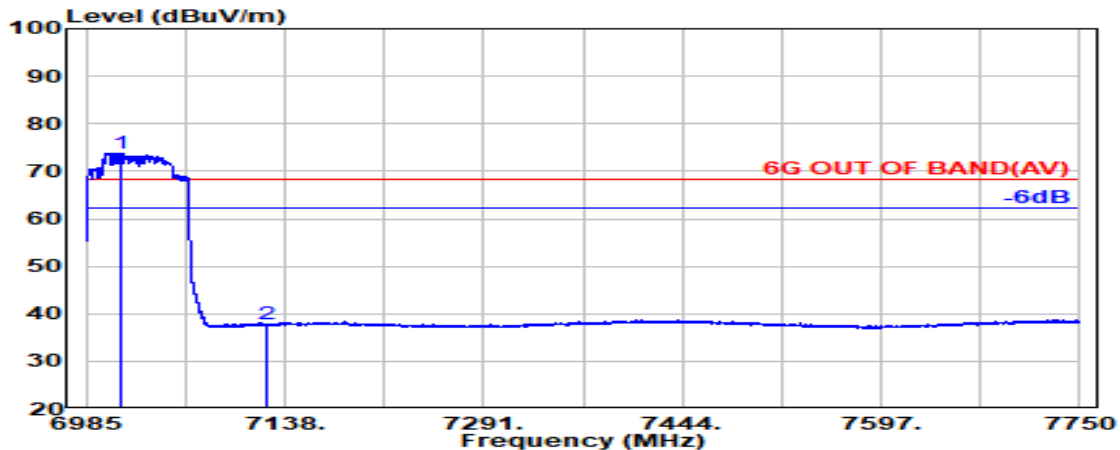


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7012.200	35.90	9.72	34.49	62.75	73.89	---	---	Average
7125.000	35.60	9.82	34.55	26.96	37.83	68.20	30.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

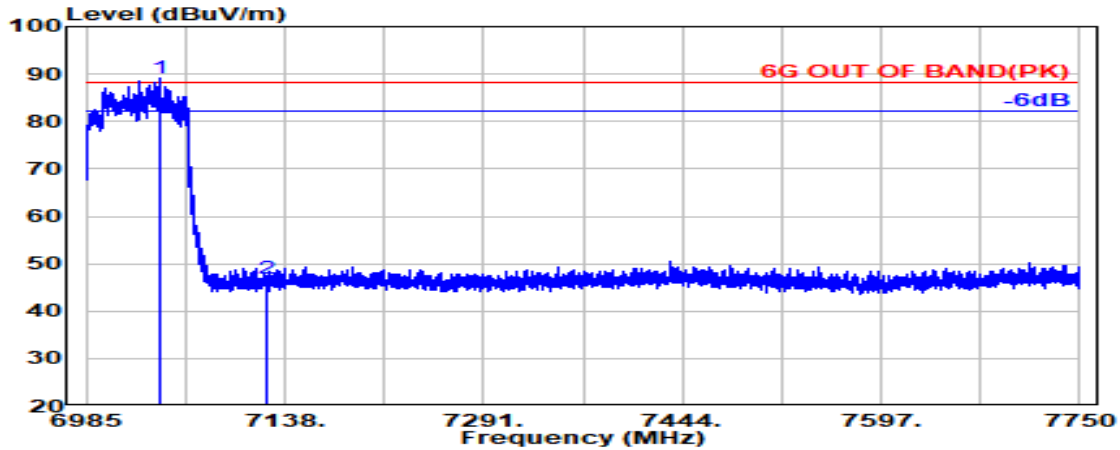

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7041.100	35.67	9.75	34.50	78.35	89.27	---	---	Peak
7125.000	35.60	9.82	34.55	35.92	46.79	88.20	41.41	Peak

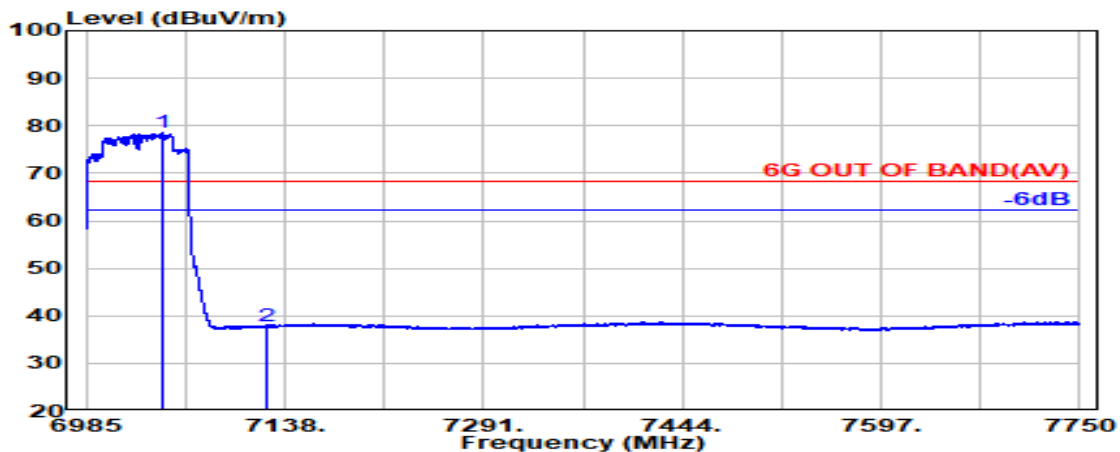


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7044.700	35.64	9.75	34.51	67.54	78.43	---	---	Average
7125.000	35.60	9.82	34.55	26.93	37.81	68.20	30.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

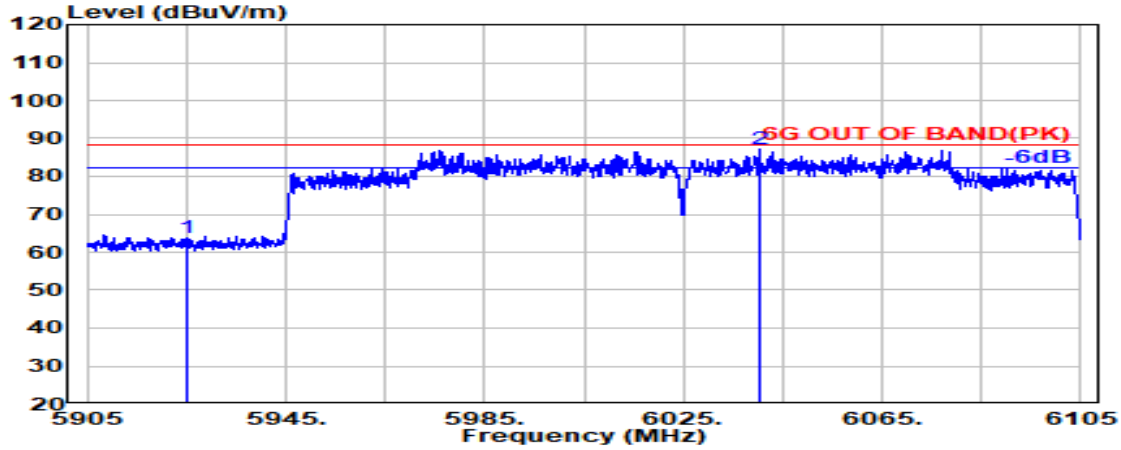

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	53.05	63.70	88.20	24.50	Peak
@ 6040.200	35.50	9.35	34.40	76.75	87.20	---	---	Peak

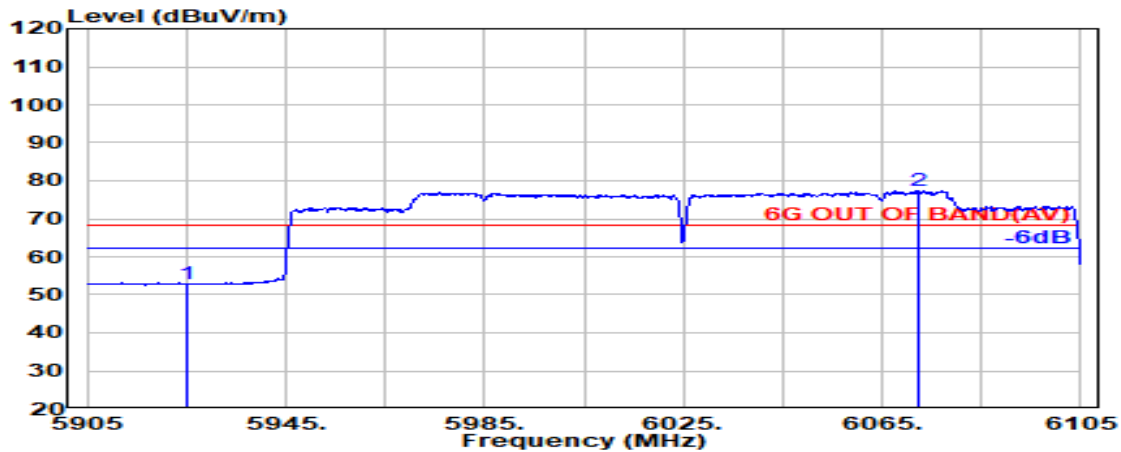


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	42.26	52.91	68.20	15.29	Average
@ 6072.200	35.63	9.36	34.38	66.66	77.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

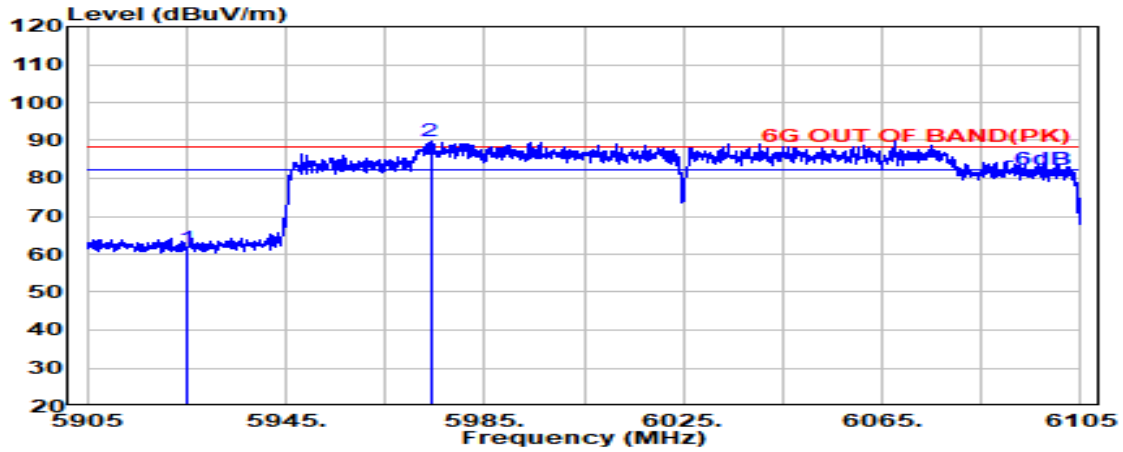

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	50.95	61.60	88.20	26.60	Peak
@ 5974.100	35.60	9.32	34.42	79.31	89.81	---	---	Peak

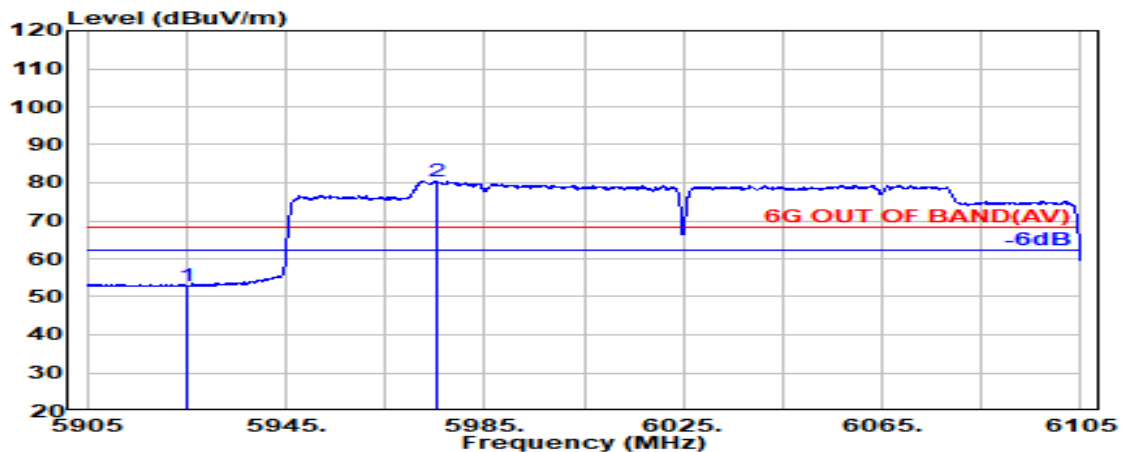


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	42.29	52.93	68.20	15.27	Average
@ 5975.400	35.60	9.32	34.42	69.98	80.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

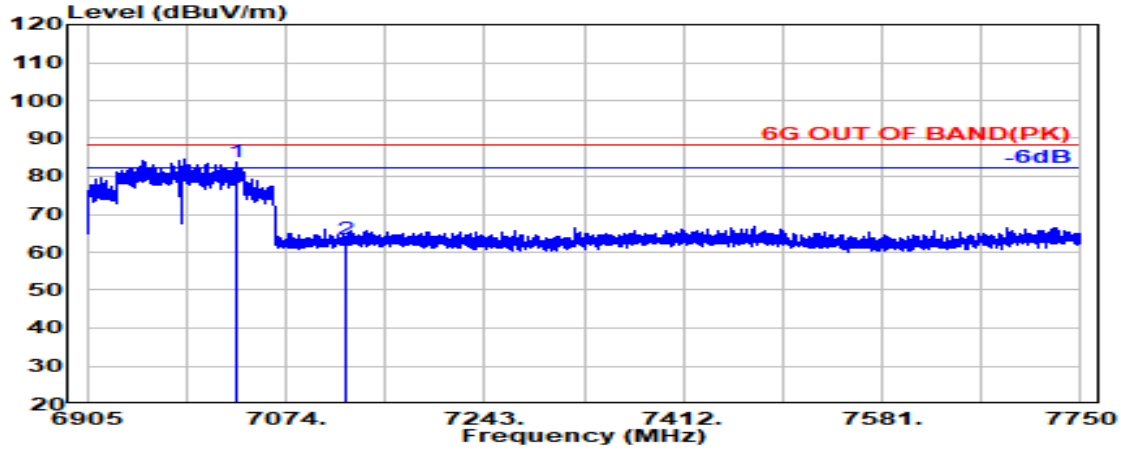

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7031.000	35.75	9.74	34.50	72.73	83.73	---	---	Peak
7125.000	35.60	9.82	34.55	52.60	63.47	88.20	24.73	Peak

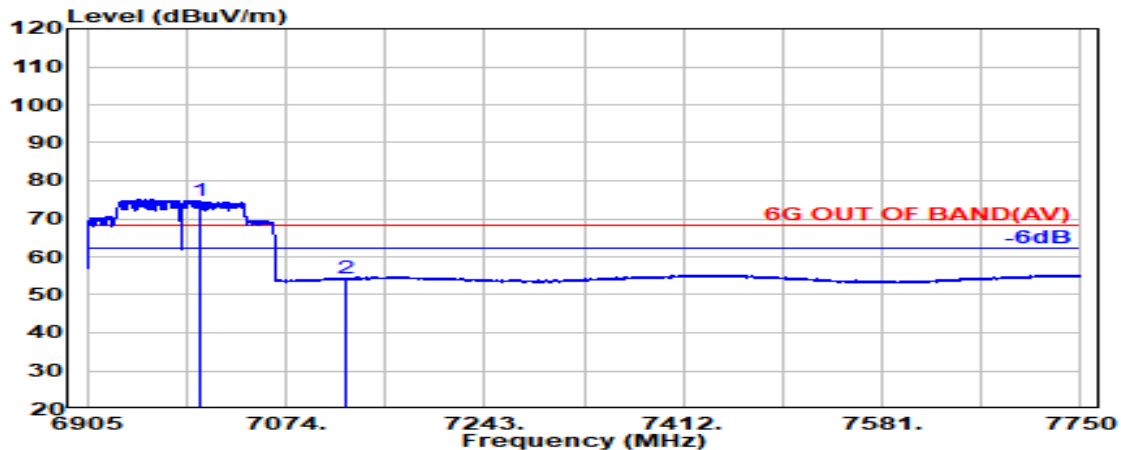


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7000.700	35.99	9.71	34.48	63.32	74.54	---	---	Average
7125.000	35.60	9.82	34.55	43.33	54.21	68.20	13.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

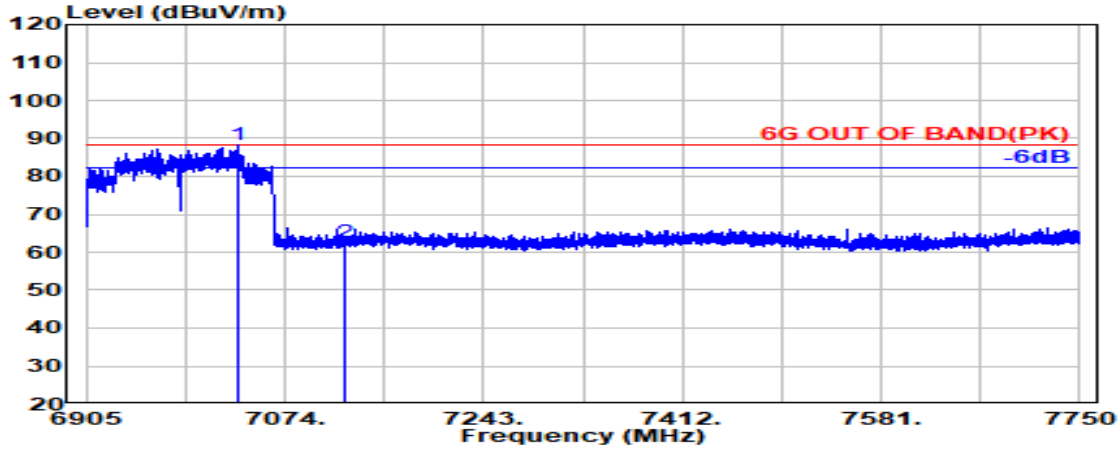

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7033.200	35.73	9.74	34.50	77.16	88.13	---	---	Peak
7125.000	35.60	9.82	34.55	51.76	62.63	88.20	25.57	Peak

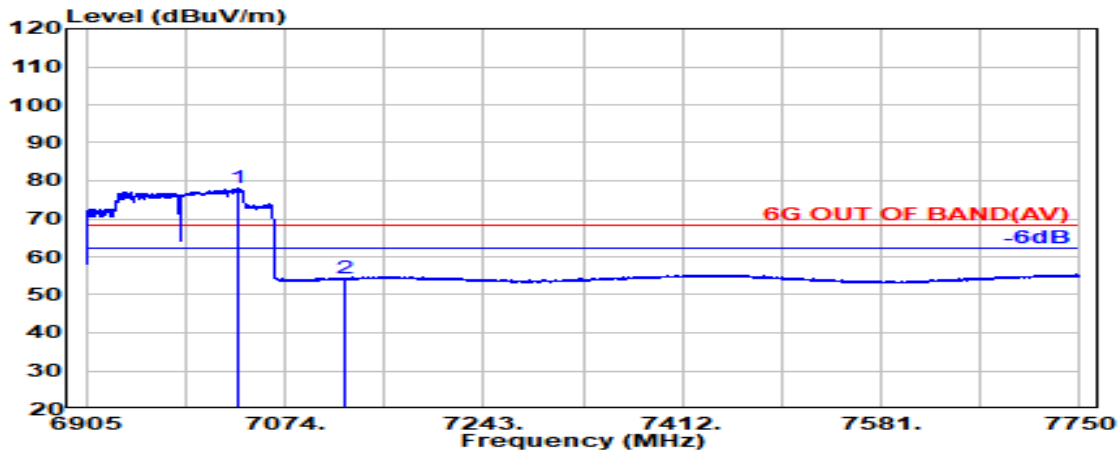


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7033.500	35.73	9.74	34.50	66.97	77.95	---	---	Average
7125.000	35.60	9.82	34.55	43.53	54.40	68.20	13.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


● OFDMA Modulation

Tones	26T	RU Index	0
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

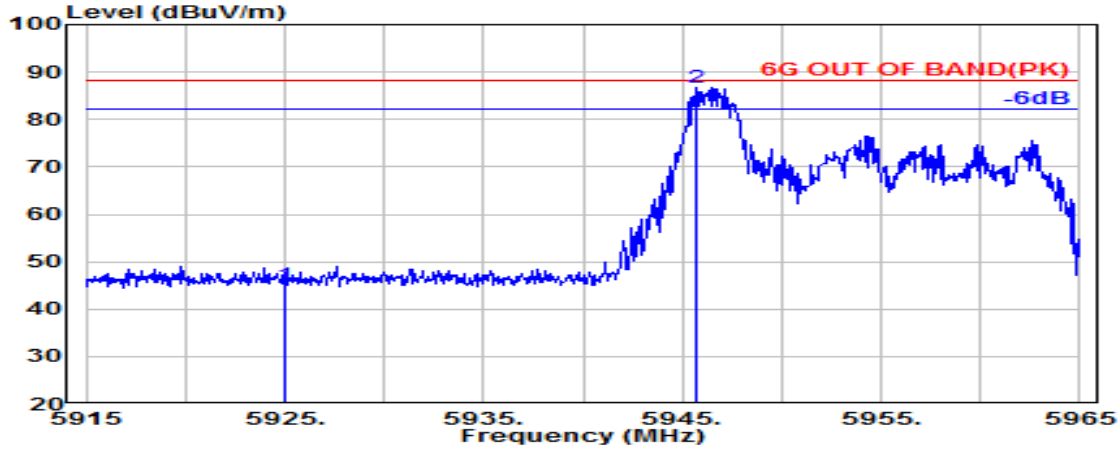

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.41	45.05	88.20	43.15	Peak
@ 5945.750	35.71	9.30	34.41	76.10	86.70	---	---	Peak

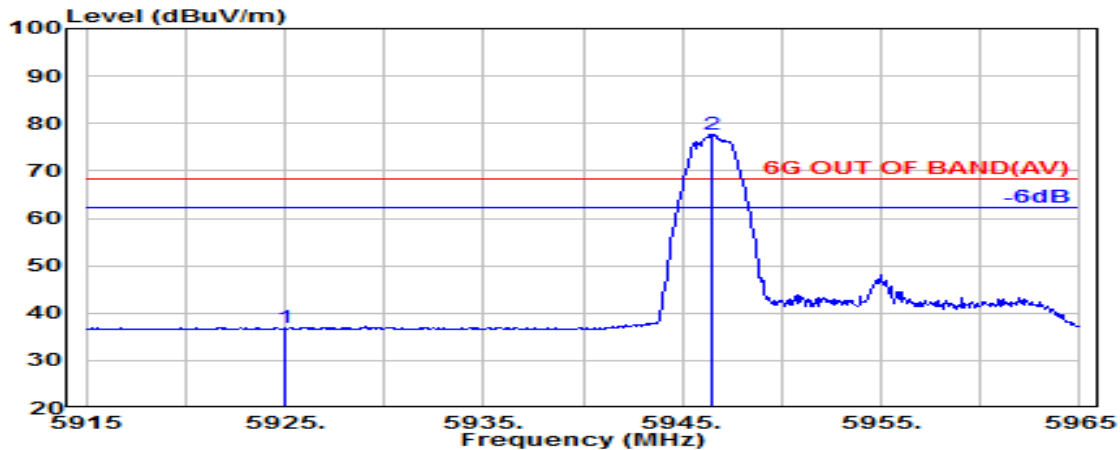


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.17	36.82	68.20	31.38	Average
@ 5946.450	35.71	9.30	34.41	67.06	77.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	26T	RU Index	0
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

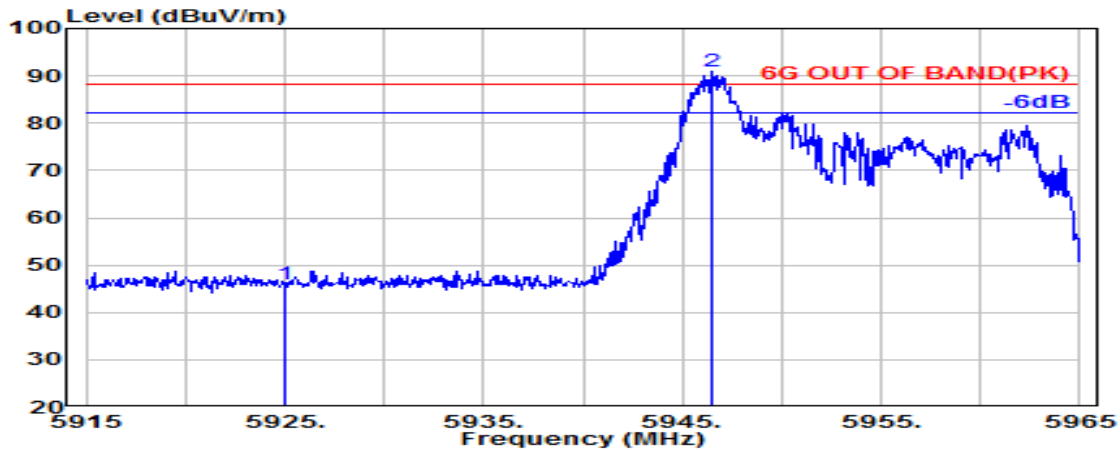

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.18	45.83	88.20	42.37	Peak
@ 5946.500	35.71	9.30	34.41	80.43	91.03	---	---	Peak

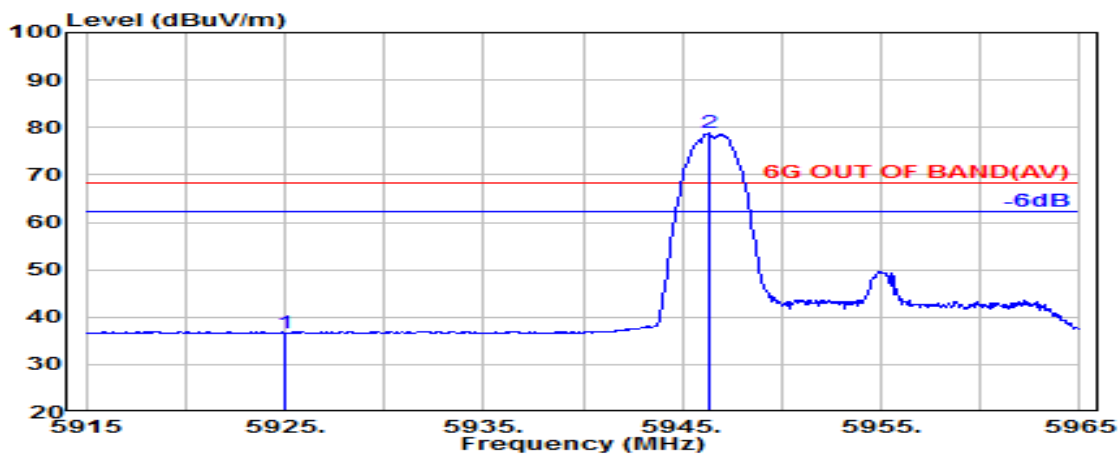


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.05	36.69	68.20	31.51	Average
@ 5946.400	35.71	9.30	34.41	68.20	78.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	37
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

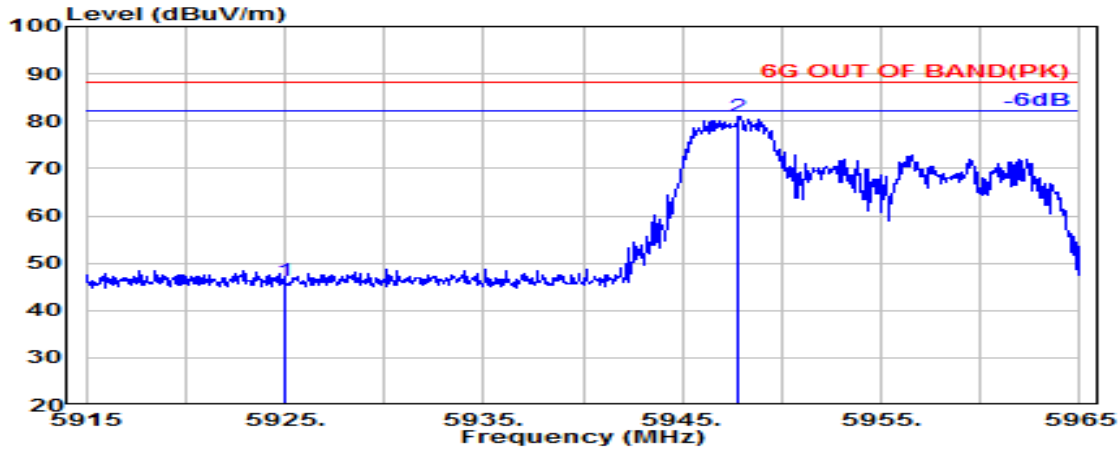

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.64	46.28	88.20	41.92	Peak
@ 5947.800	35.70	9.30	34.41	70.34	80.94	---	---	Peak

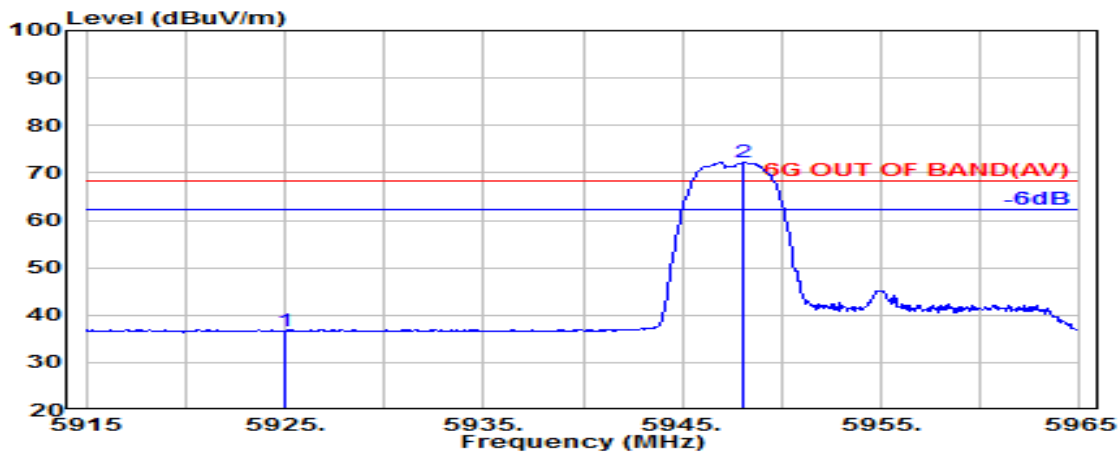


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	25.92	36.57	68.20	31.63	Average
@ 5948.050	35.70	9.30	34.41	61.66	72.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	37
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

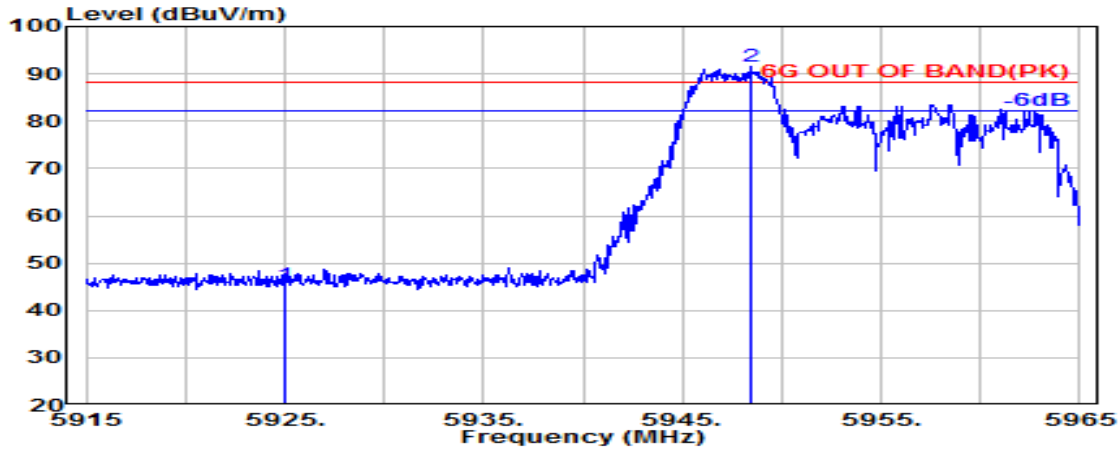

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.81	45.46	88.20	42.74	Peak
@ 5948.450	35.70	9.30	34.41	80.91	91.51	---	---	Peak

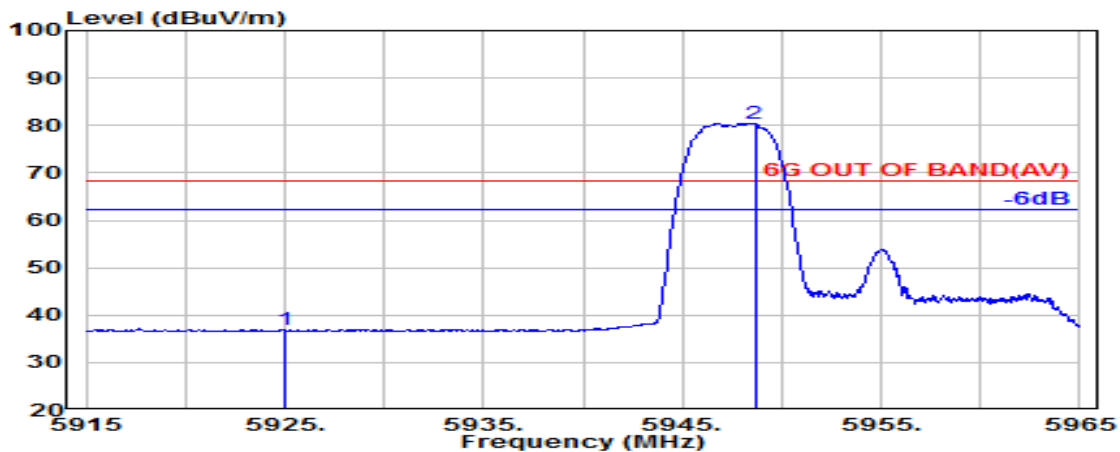


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.23	36.88	68.20	31.32	Average
@ 5948.650	35.70	9.31	34.41	69.91	80.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	40
Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

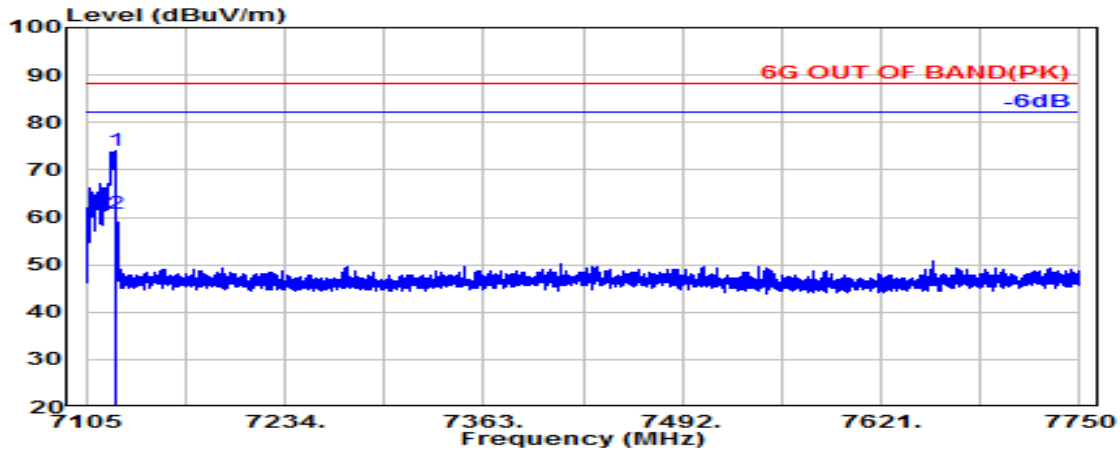

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7123.700	35.59	9.82	34.55	63.09	73.95	---	---	Peak
7125.000	35.60	9.82	34.55	49.77	60.65	88.20	27.55	Peak

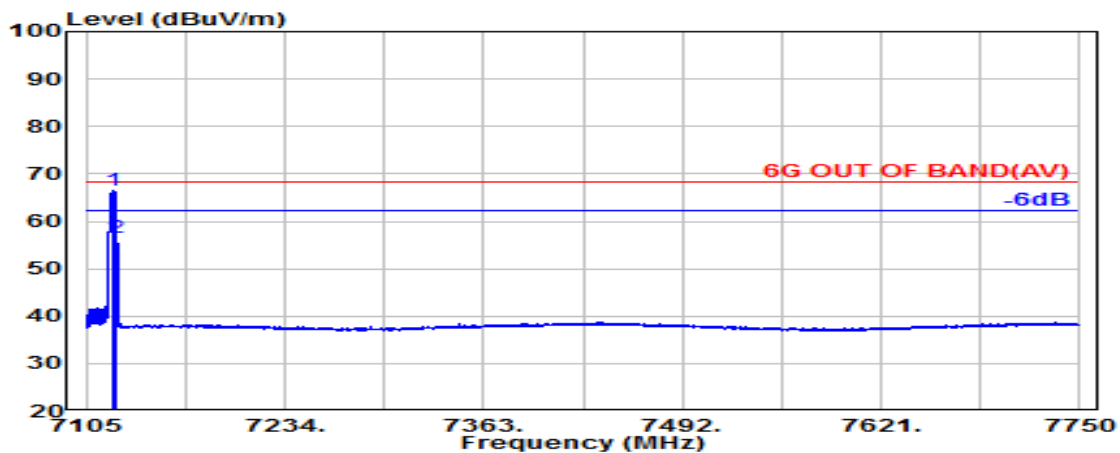


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7123.100	35.59	9.82	34.55	55.61	66.47	---	---	Average
7125.000	35.60	9.82	34.55	45.72	56.59	68.20	11.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	40
Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

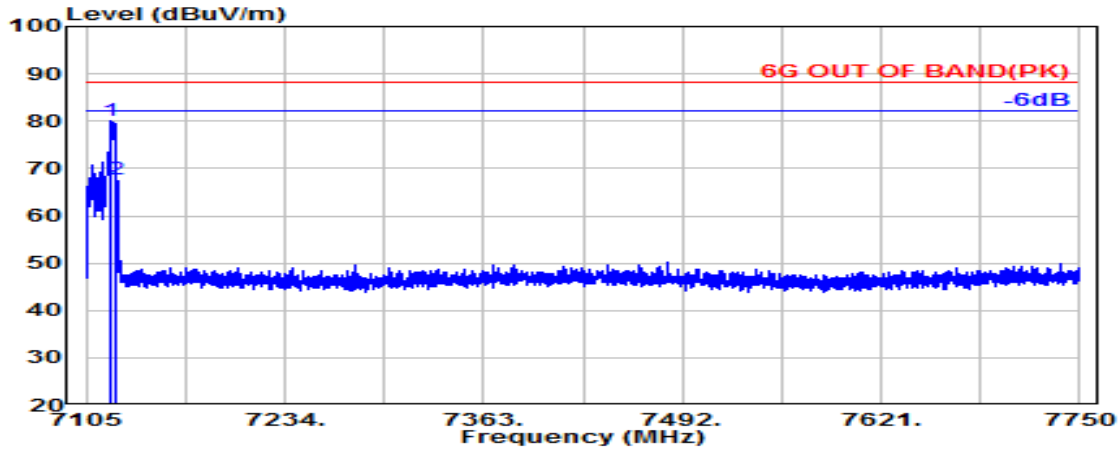

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7121.300	35.59	9.82	34.55	69.31	80.17	---	---	Peak
7125.000	35.60	9.82	34.55	56.78	67.65	88.20	20.55	Peak

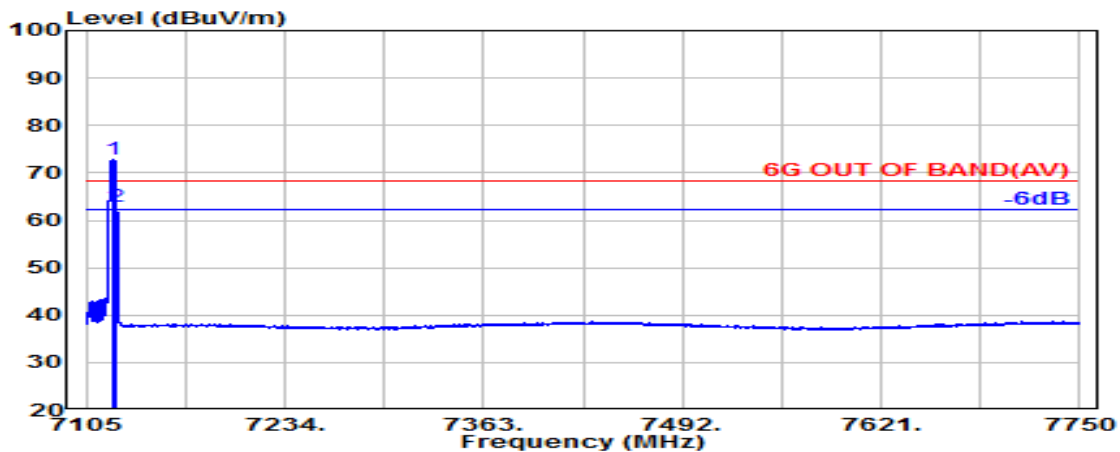


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7122.100	35.59	9.82	34.55	61.90	72.76	---	---	Average
7125.000	35.60	9.82	34.55	51.88	62.75	68.20	5.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	44
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

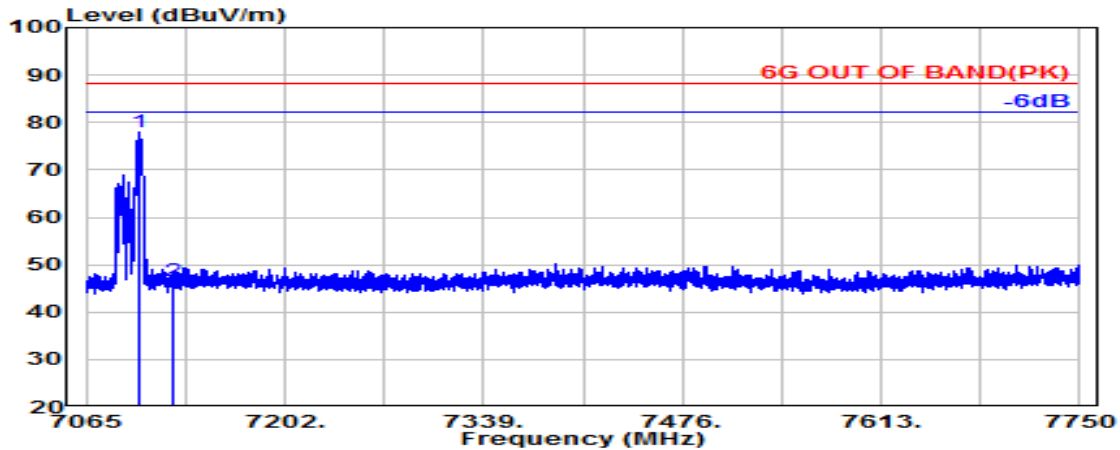

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.100	35.50	9.80	34.54	67.24	78.01	---	---	Peak
7125.000	35.60	9.82	34.55	35.79	46.67	88.20	41.53	Peak

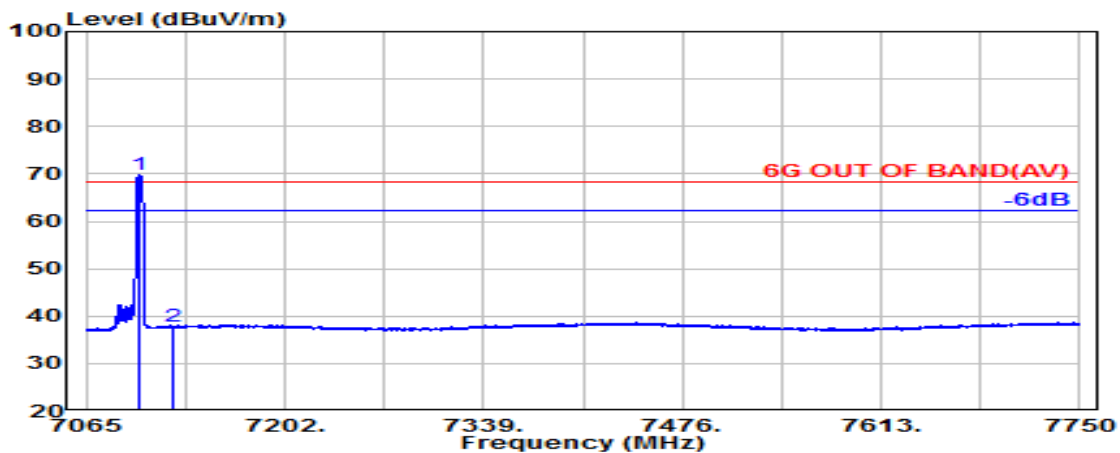


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.200	35.50	9.80	34.54	58.91	69.68	---	---	Average
7125.000	35.60	9.82	34.55	26.88	37.75	68.20	30.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	44
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

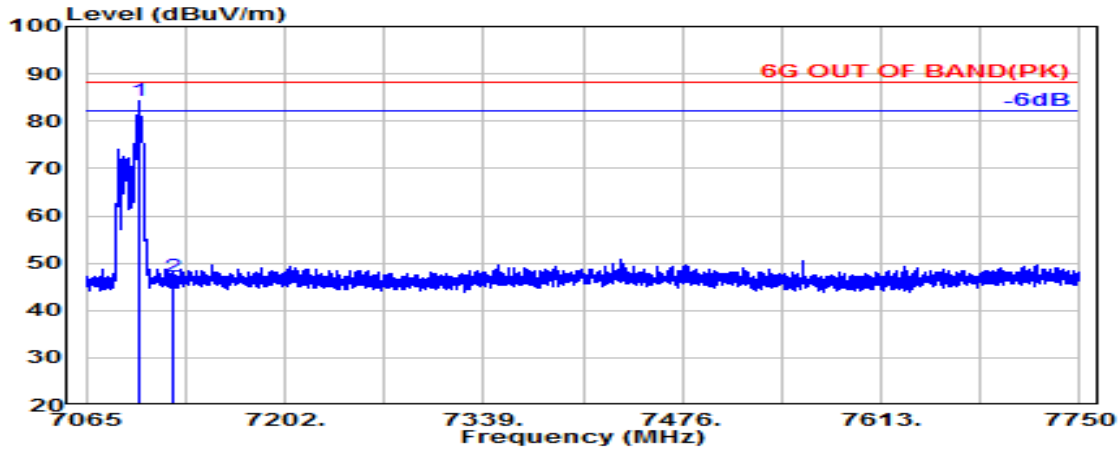

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.800	35.51	9.80	34.54	73.60	84.37	---	---	Peak
7125.000	35.60	9.82	34.55	36.42	47.29	88.20	40.91	Peak

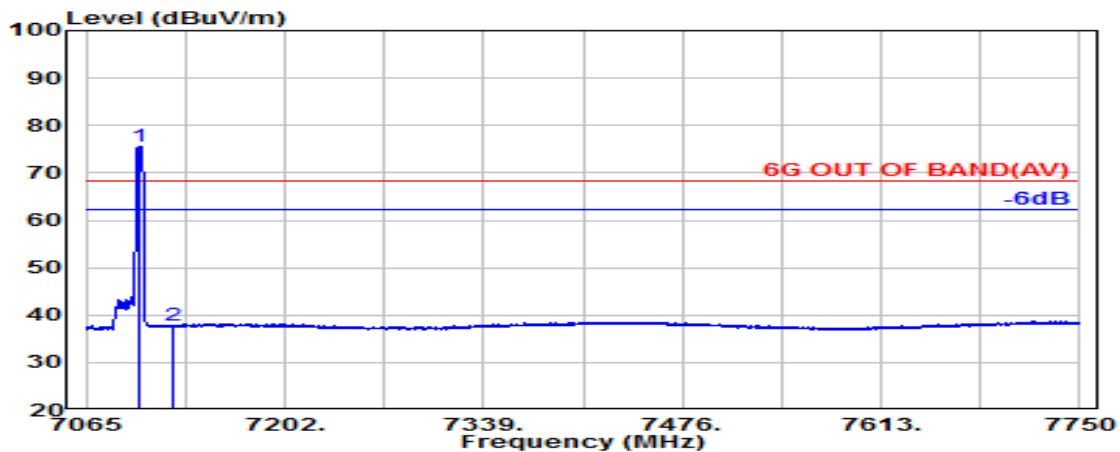


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7102.400	35.51	9.80	34.54	64.80	75.58	---	---	Average
7125.000	35.60	9.82	34.55	26.85	37.72	68.20	30.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

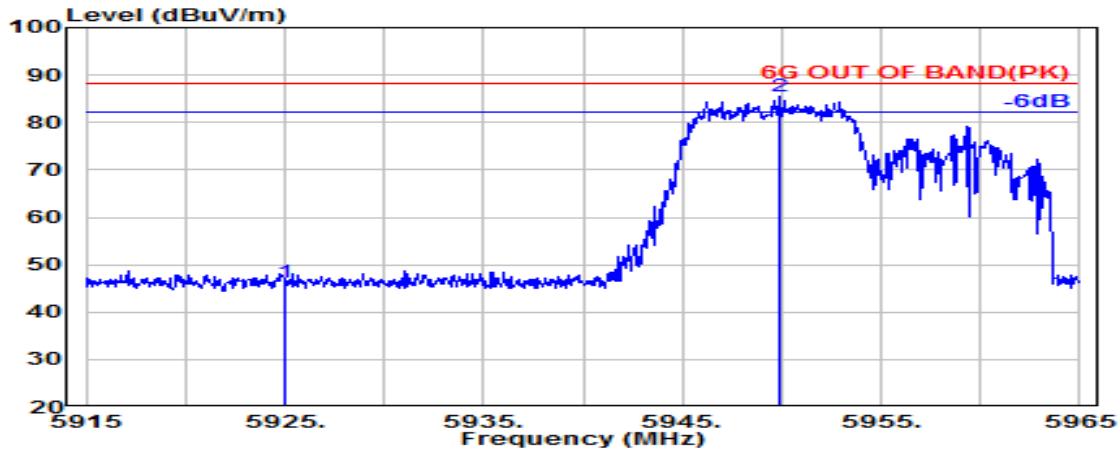

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.70	46.34	88.20	41.86	Peak
@ 5949.950	35.70	9.31	34.41	74.87	85.47	---	---	Peak

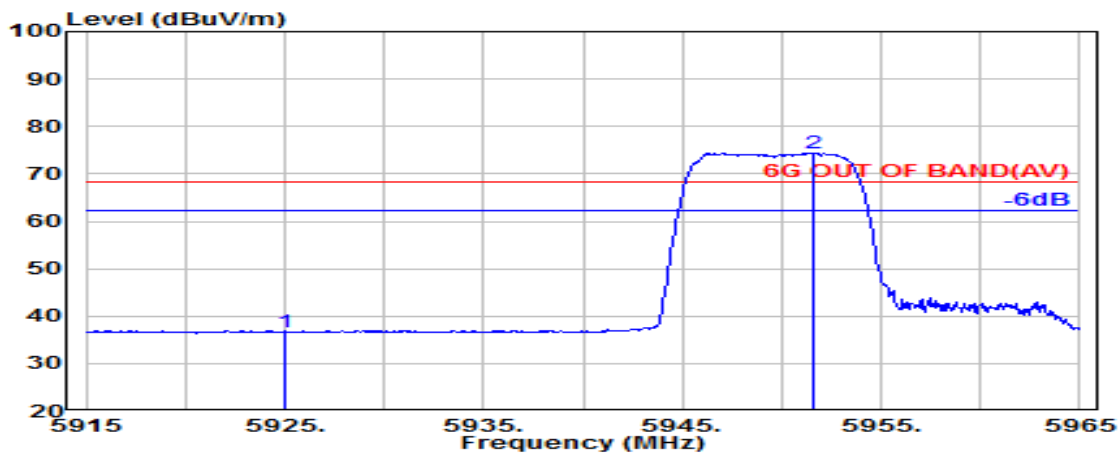


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.11	36.75	68.20	31.45	Average
@ 5951.650	35.69	9.31	34.41	63.84	74.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

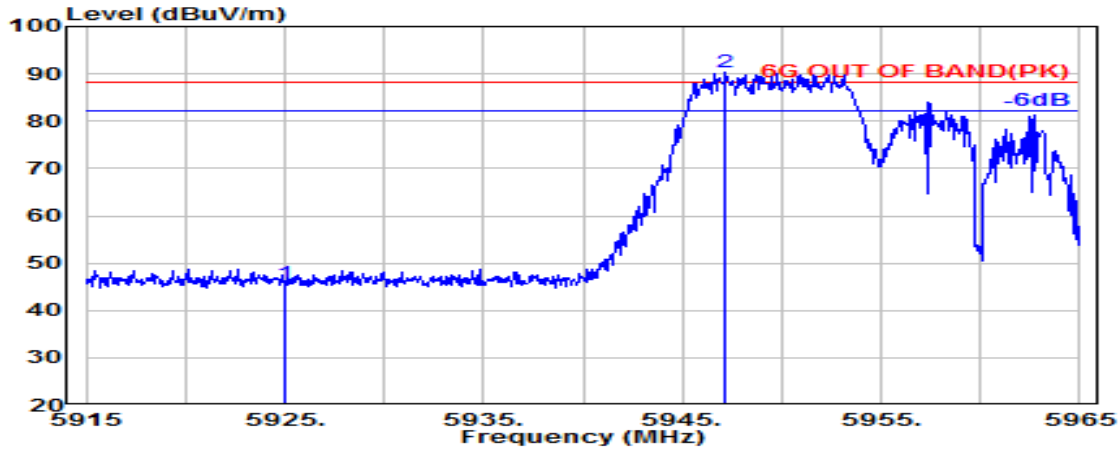

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.90	45.55	88.20	42.65	Peak
@ 5947.200	35.71	9.30	34.41	79.87	90.47	---	---	Peak

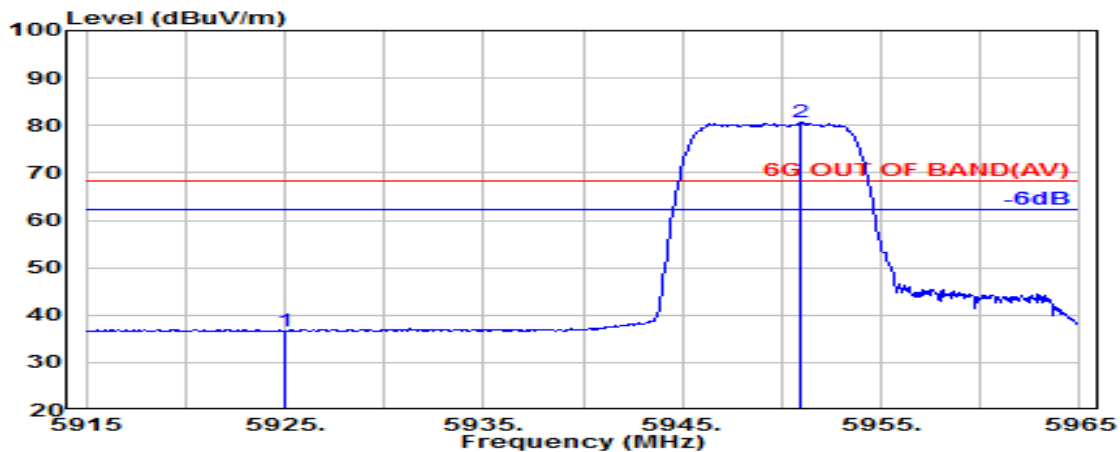


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.08	36.73	68.20	31.47	Average
@ 5951.000	35.70	9.31	34.41	69.95	80.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	54
Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

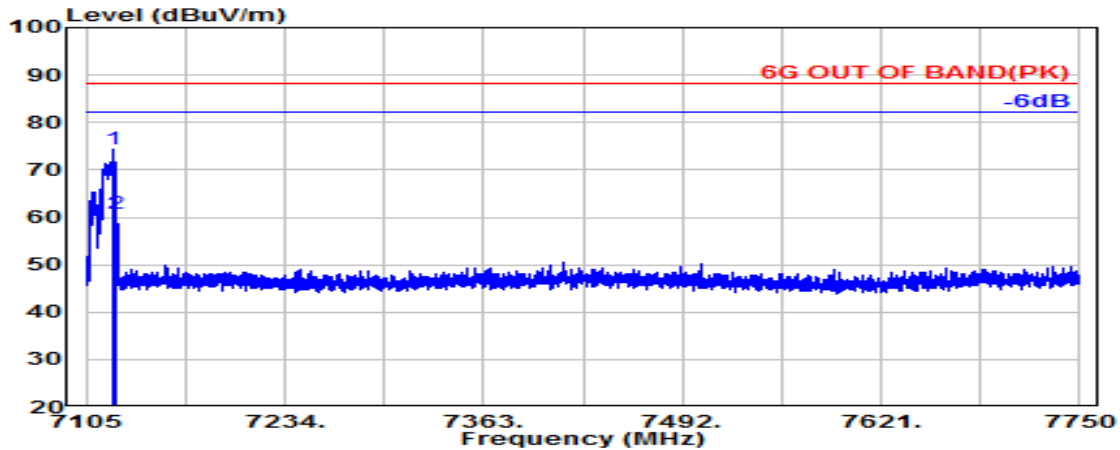

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7122.000	35.59	9.82	34.55	63.35	74.21	---	---	Peak
7125.000	35.60	9.82	34.55	49.78	60.65	88.20	27.55	Peak

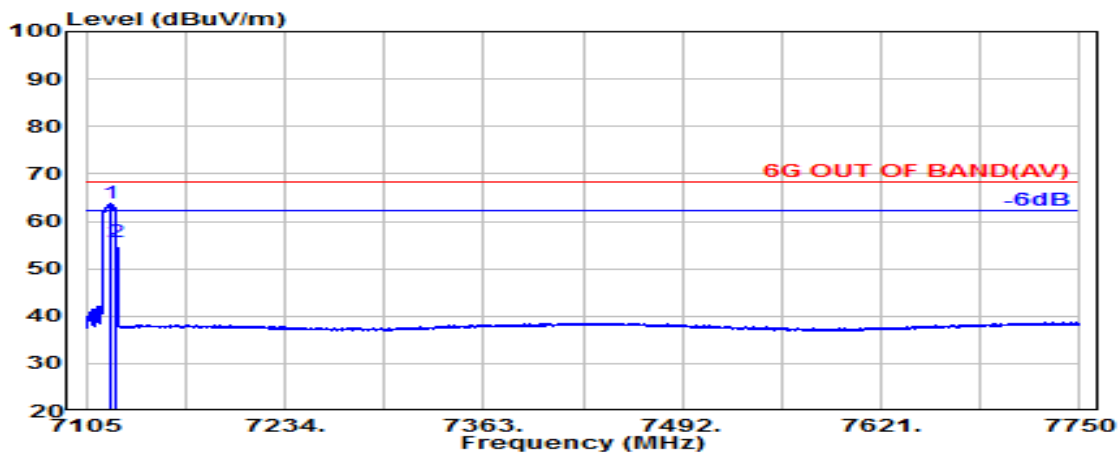


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7120.500	35.58	9.82	34.55	52.82	63.67	---	---	Average
7125.000	35.60	9.82	34.55	44.67	55.55	68.20	12.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	54
Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

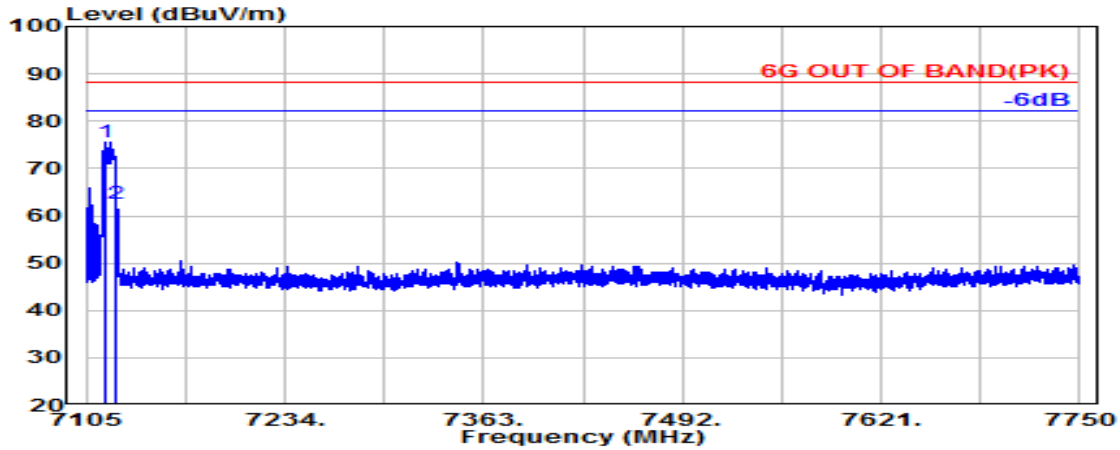

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7117.400	35.57	9.82	34.55	64.85	75.68	---	---	Peak
7125.000	35.60	9.82	34.55	51.56	62.43	88.20	25.77	Peak

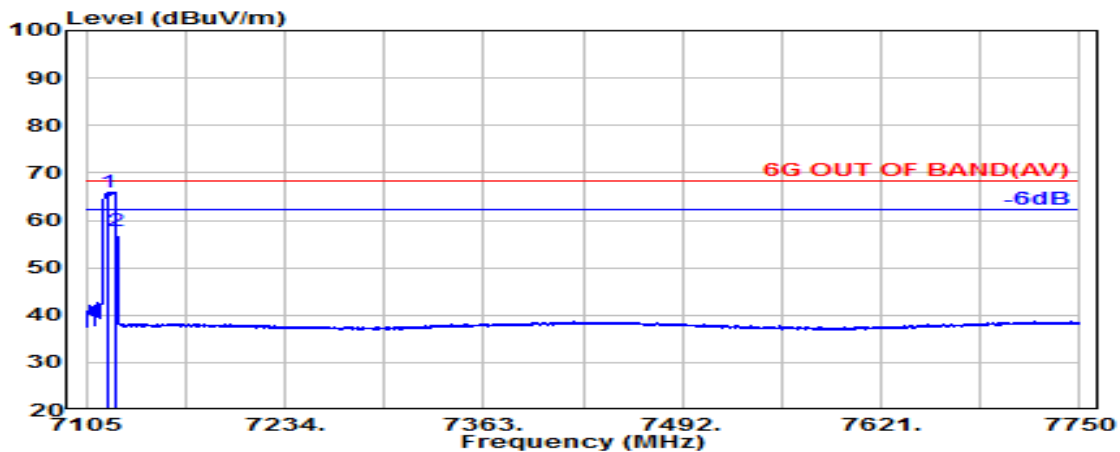


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7118.500	35.57	9.82	34.55	54.98	65.82	---	---	Average
7125.000	35.60	9.82	34.55	46.77	57.65	68.20	10.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	56
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

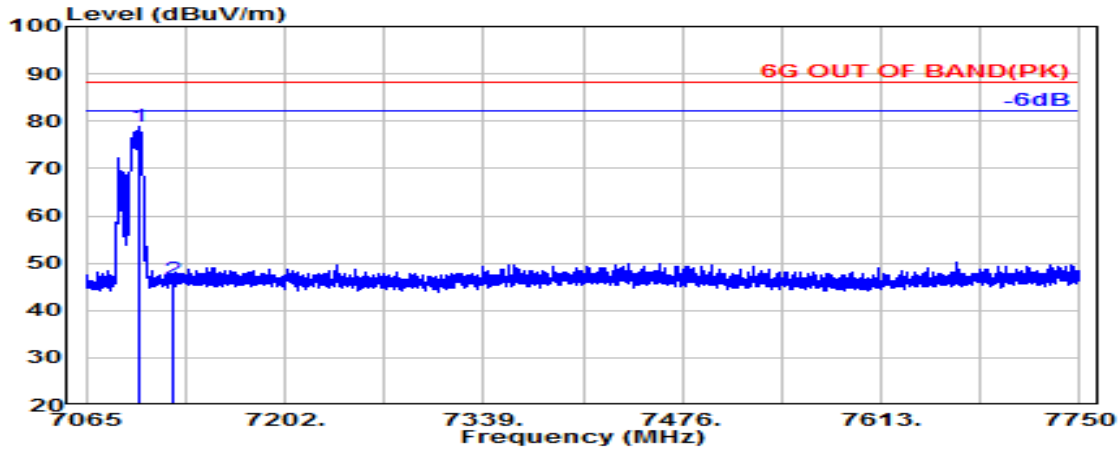

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.900	35.51	9.80	34.54	68.24	79.01	88.20	--	Peak
7125.000	35.60	9.82	34.55	35.60	46.47	88.20	41.73	Peak

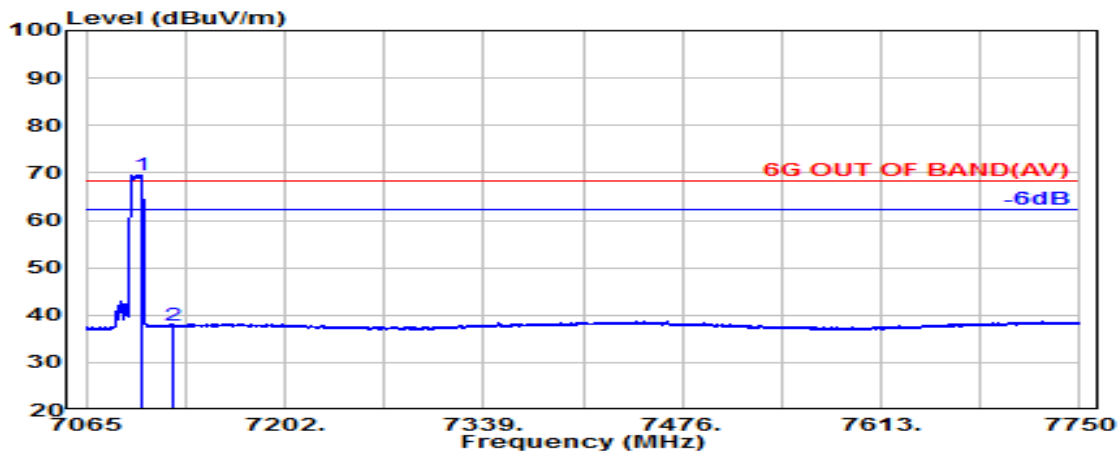


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7102.700	35.51	9.80	34.54	58.77	69.55	68.20	---	Average
7125.000	35.60	9.82	34.55	26.89	37.76	68.20	30.44	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	56
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

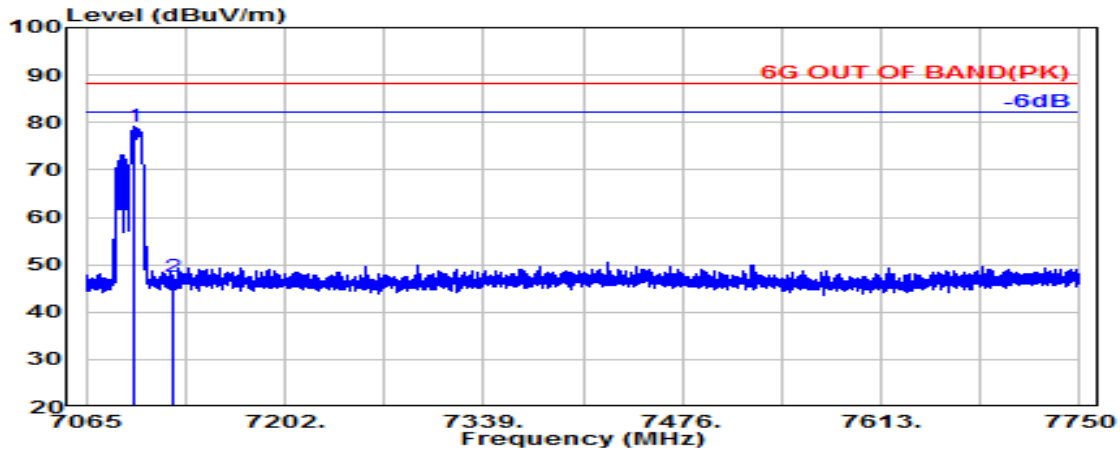

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7097.900	35.50	9.80	34.54	68.26	79.03	---	---	Peak
7125.000	35.60	9.82	34.55	36.54	47.42	88.20	40.78	Peak

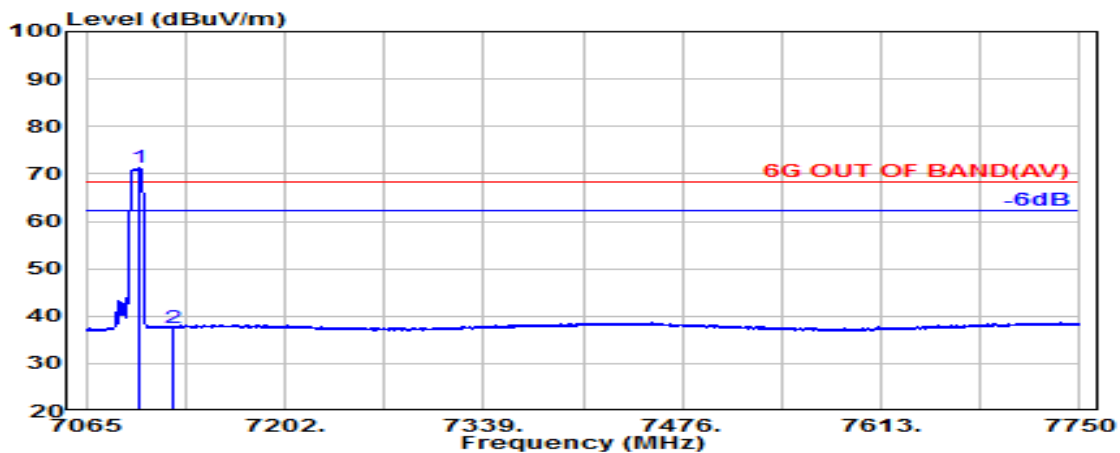


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.200	35.50	9.80	34.54	60.50	71.27	---	---	Average
7125.000	35.60	9.82	34.55	26.72	37.59	68.20	30.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

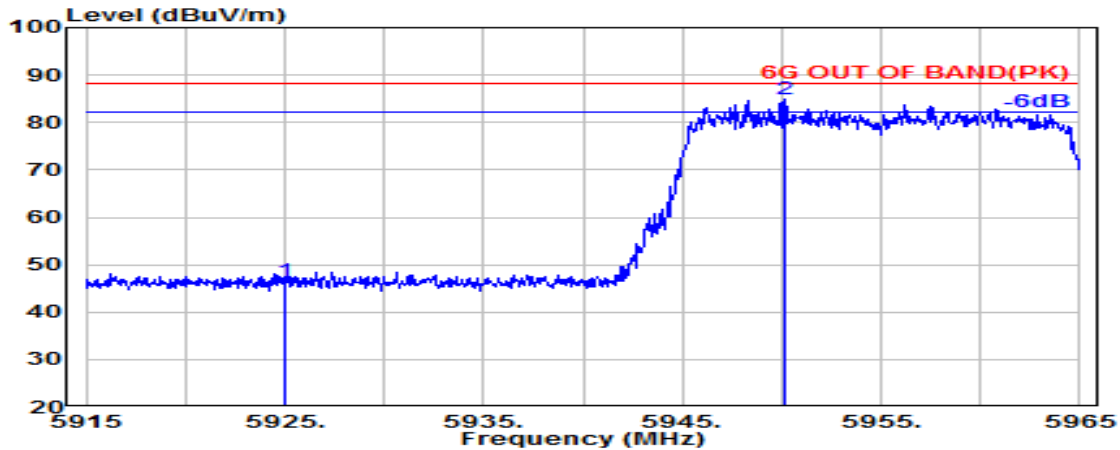

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.94	46.59	88.20	41.61	Peak
@ 5950.200	35.70	9.31	34.41	74.28	84.88	---	---	Peak

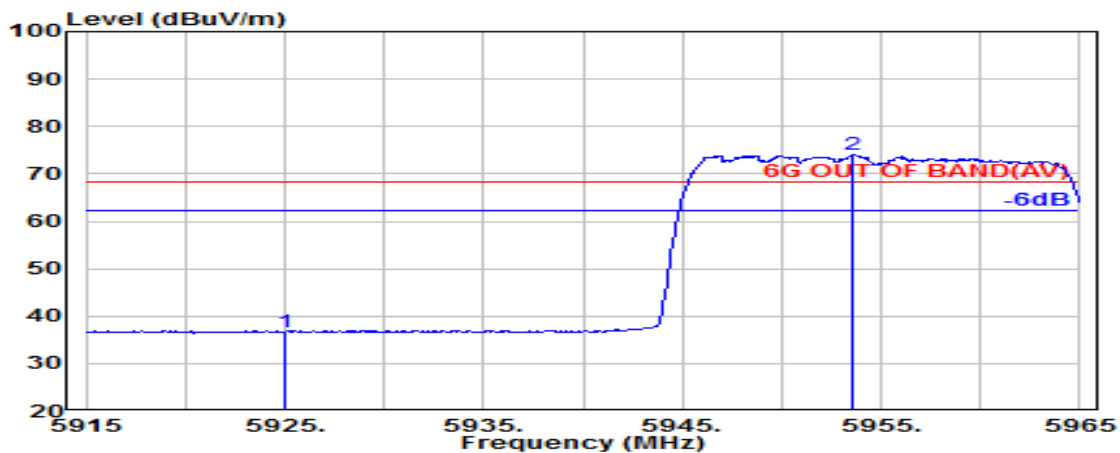


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	25.90	36.55	68.20	31.65	Average
@ 5953.600	35.69	9.31	34.41	63.50	74.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

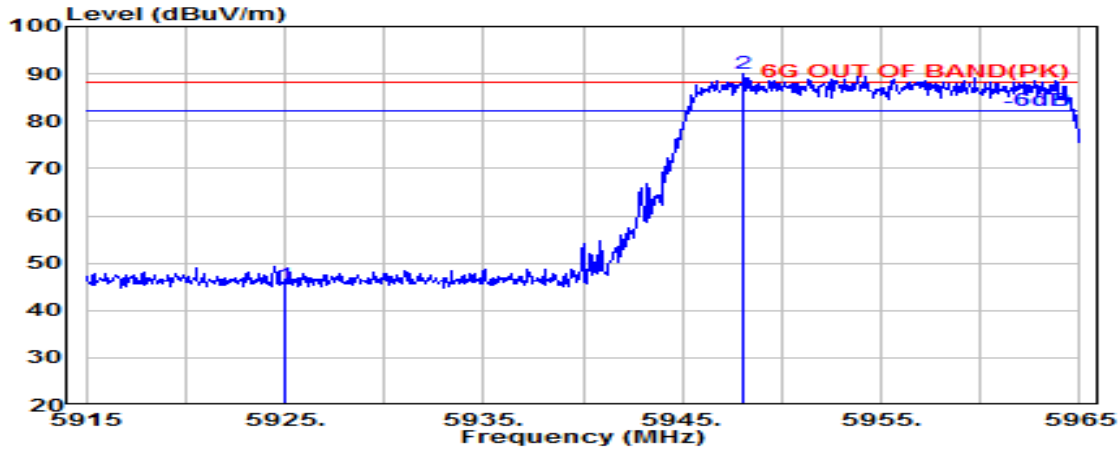

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.81	45.46	88.20	42.74	Peak
@ 5948.100	35.70	9.30	34.41	79.50	90.10	---	---	Peak

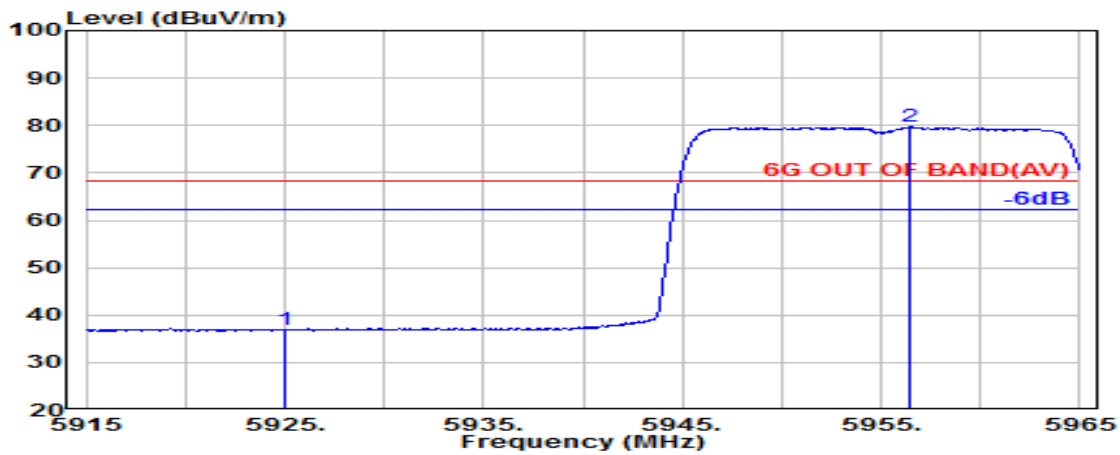


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.23	36.88	68.20	31.32	Average
@ 5956.500	35.67	9.31	34.41	69.16	79.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

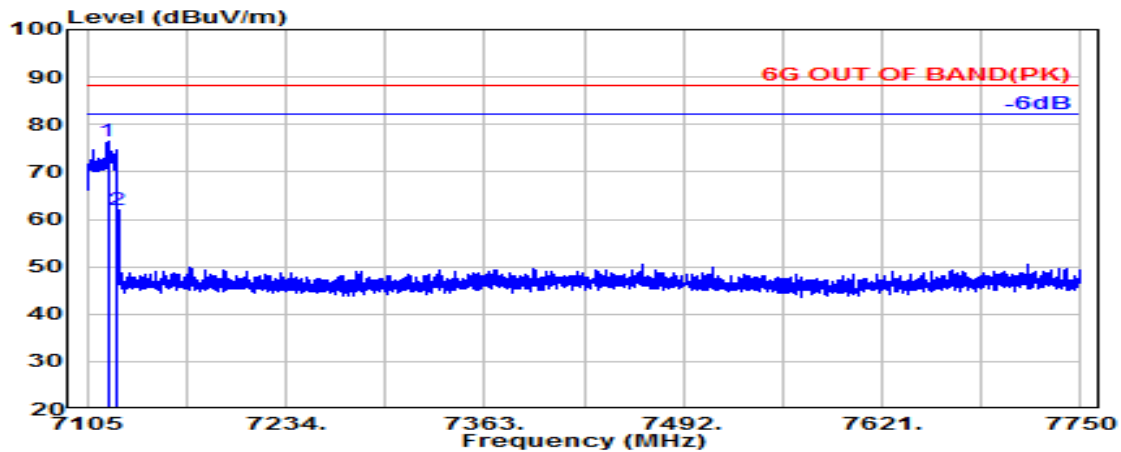

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7118.300	35.57	9.82	34.55	65.55	76.39	---	---	Peak
7125.000	35.60	9.82	34.55	51.20	62.07	88.20	26.13	Peak

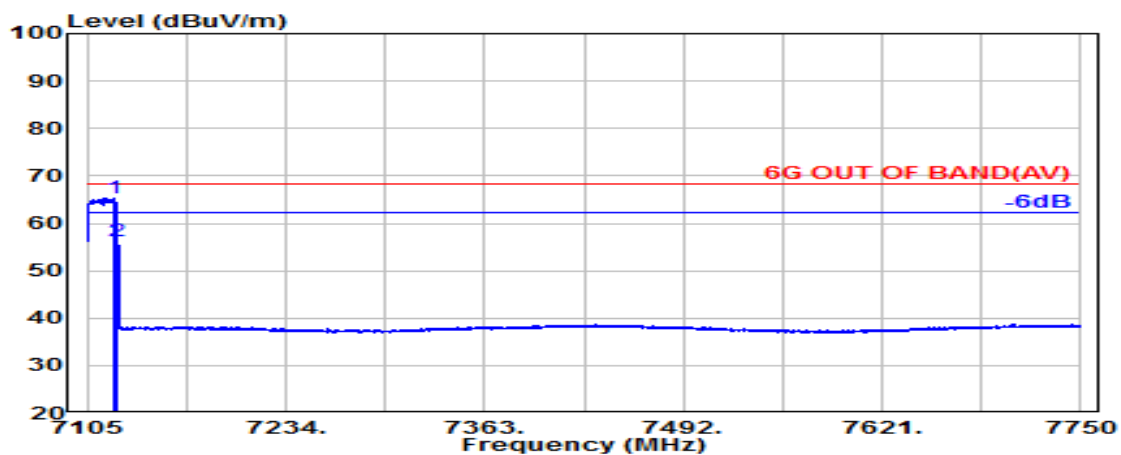


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7122.200	35.59	9.82	34.55	54.44	65.30	---	---	Average
7125.000	35.60	9.82	34.55	45.30	56.17	68.20	12.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

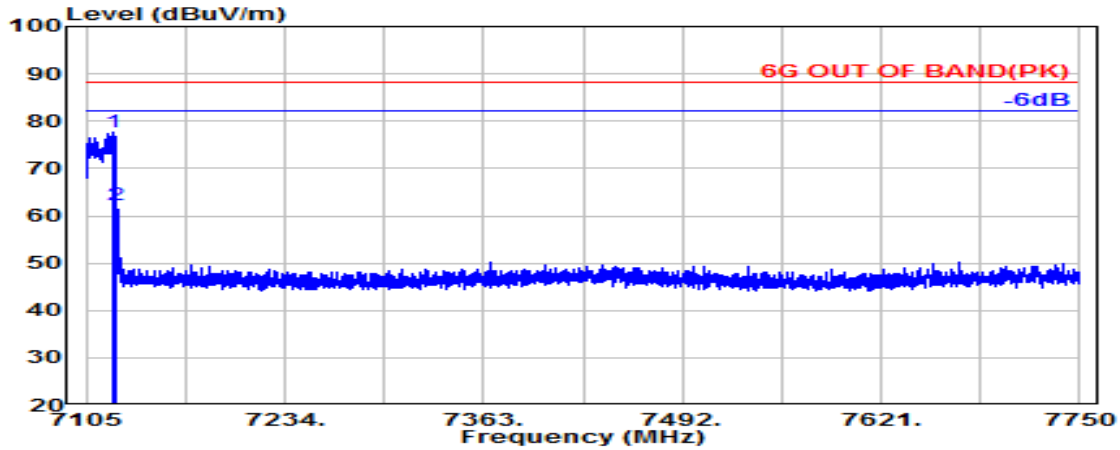

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7122.200	35.59	9.82	34.55	66.78	77.64	---	---	Peak
7125.000	35.60	9.82	34.55	51.46	62.34	88.20	25.86	Peak

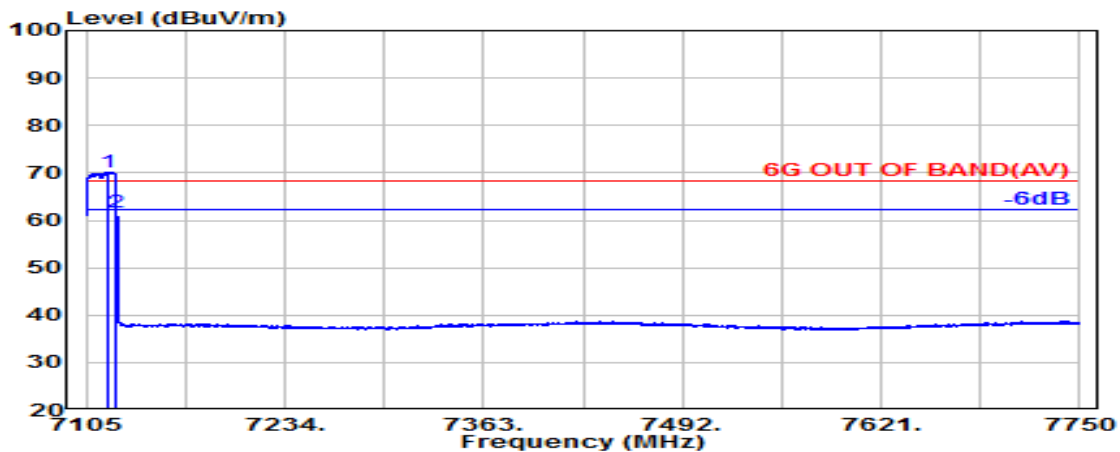


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7118.700	35.57	9.82	34.55	59.39	70.24	---	---	Average
7125.000	35.60	9.82	34.55	50.86	61.73	68.20	6.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX5985MHz

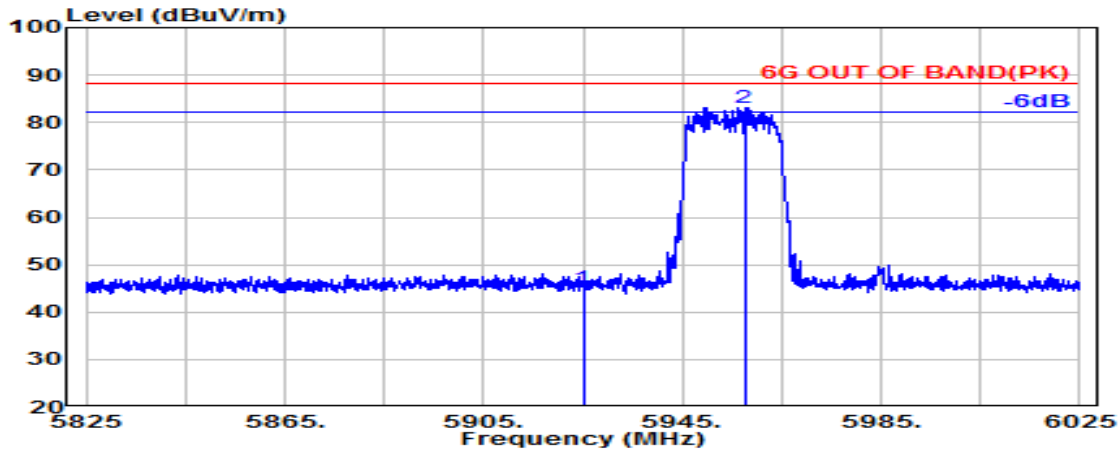

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.49	45.14	88.20	43.06	Peak
@ 5957.500	35.67	9.31	34.41	72.66	83.23	---	---	Peak

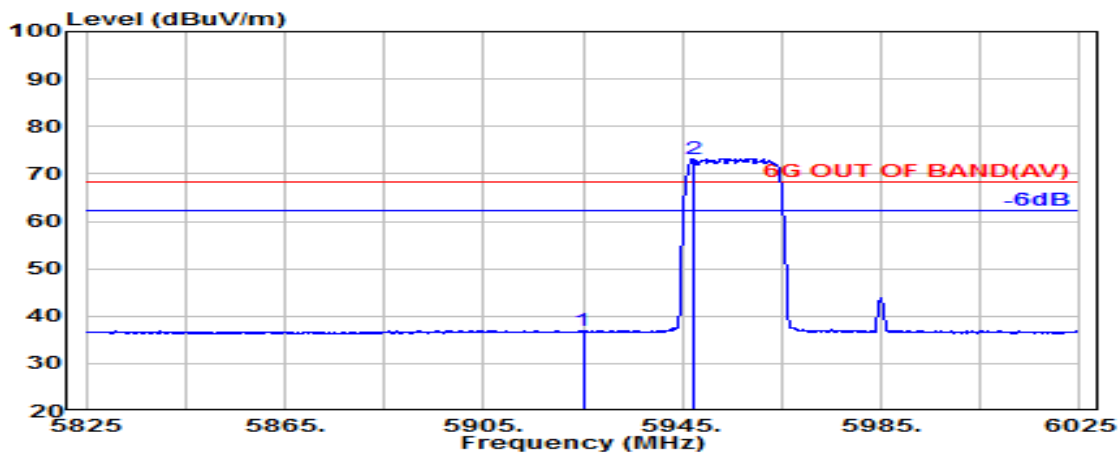


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.11	36.76	68.20	31.44	Average
@ 5947.400	35.71	9.30	34.41	62.60	73.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX5985MHz

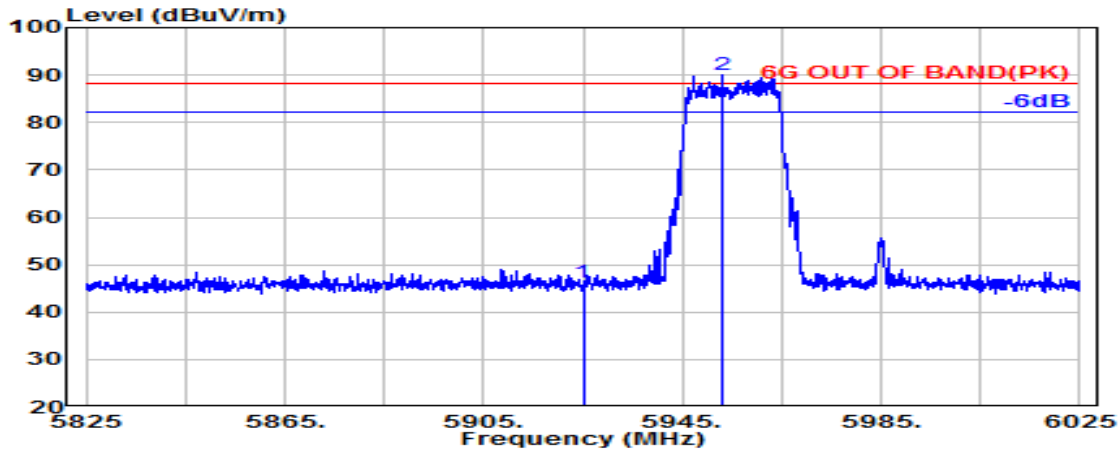

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.58	46.23	88.20	41.97	Peak
@ 5953.100	35.69	9.31	34.41	79.53	90.12	---	---	Peak

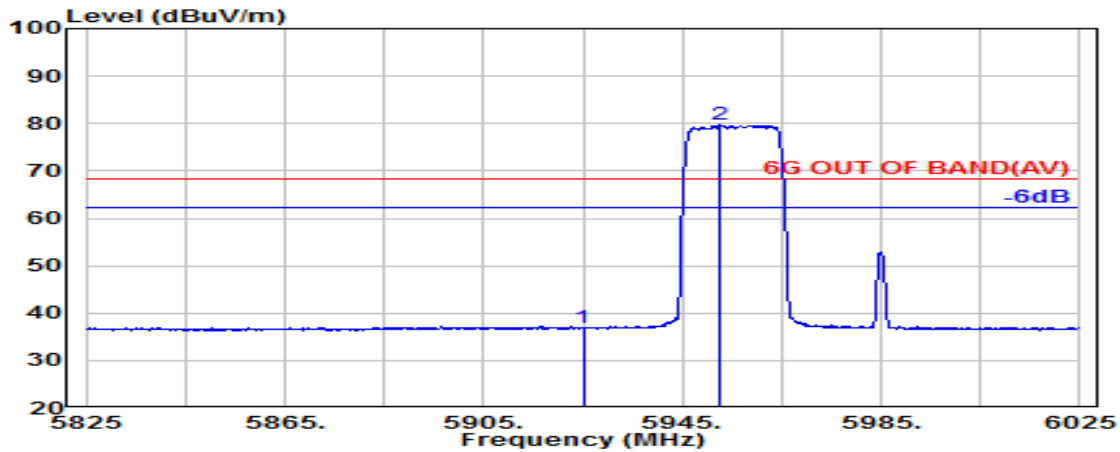


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.29	36.93	68.20	31.27	Average
@ 5952.700	35.69	9.31	34.41	69.08	79.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	62
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX7085MHz

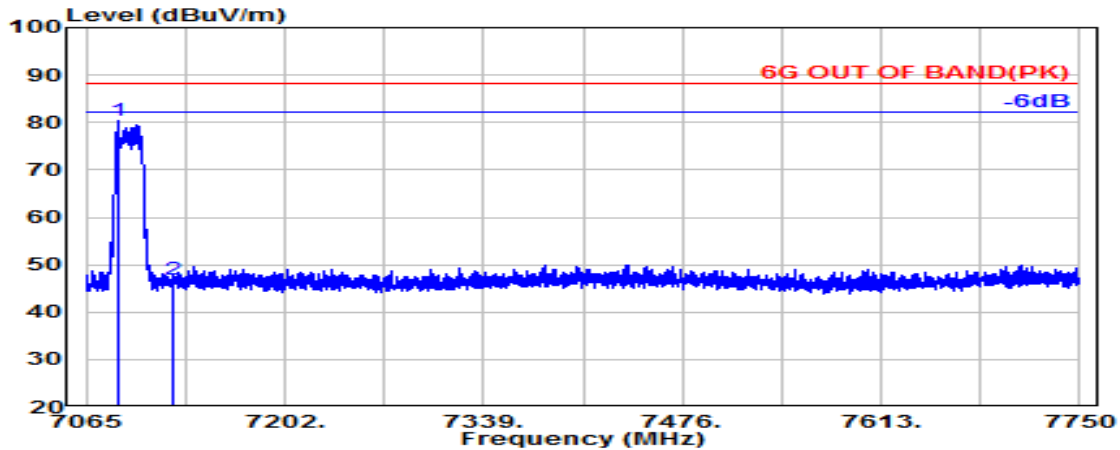

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7087.000	35.53	9.79	34.53	69.50	80.28	---	---	Peak
7125.000	35.60	9.82	34.55	36.10	46.97	68.20	21.23	Peak

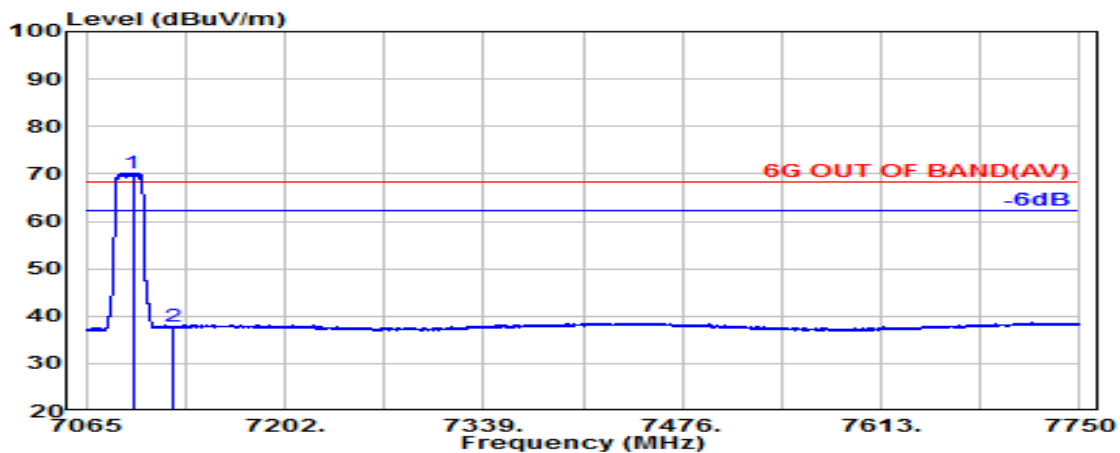


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7097.100	35.51	9.80	34.54	59.45	70.22	---	---	Average
7125.000	35.60	9.82	34.55	27.09	37.96	68.20	30.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	62
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX7085MHz

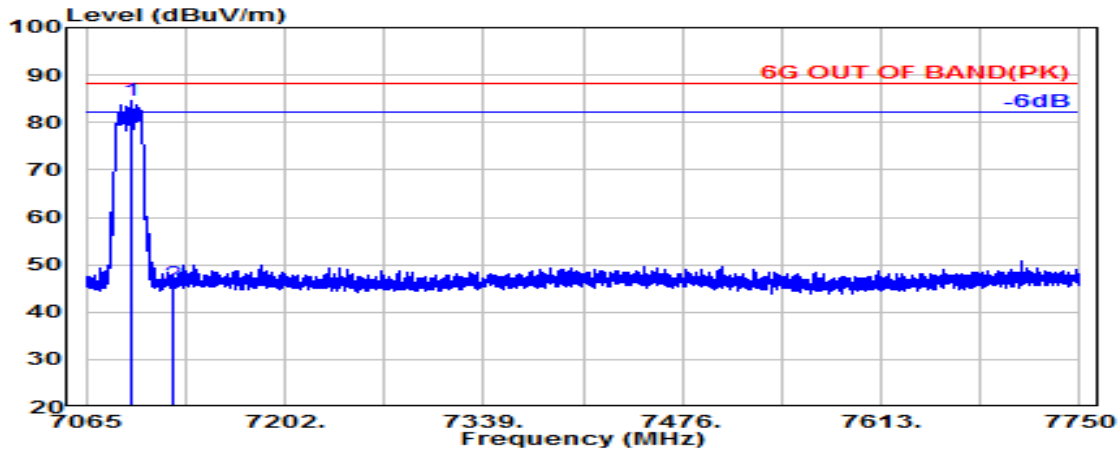

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7096.400	35.51	9.80	34.54	73.70	84.47	---	---	Peak
7125.000	35.60	9.82	34.55	34.95	45.83	68.20	22.37	Peak

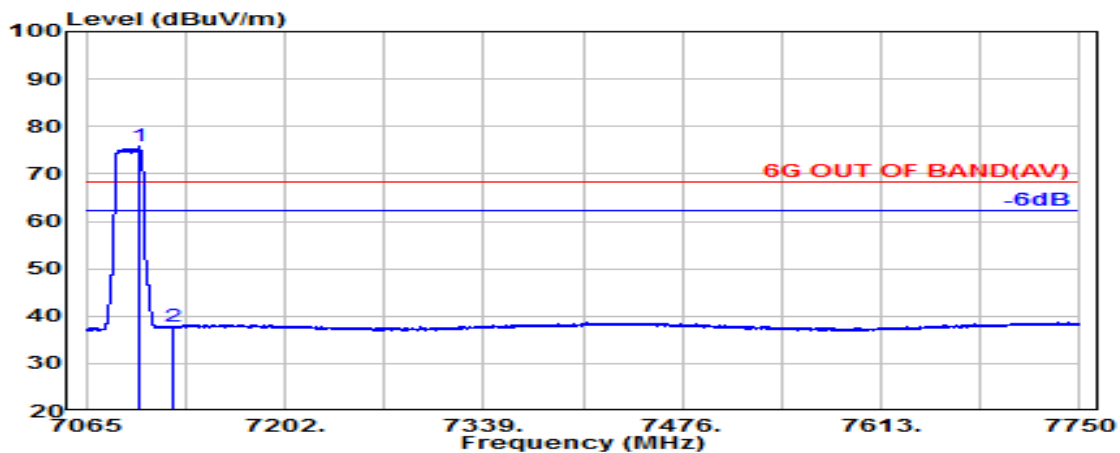


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.600	35.51	9.80	34.54	64.97	75.74	---	---	Average
7125.000	35.60	9.82	34.55	26.82	37.69	68.20	30.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX5985MHz

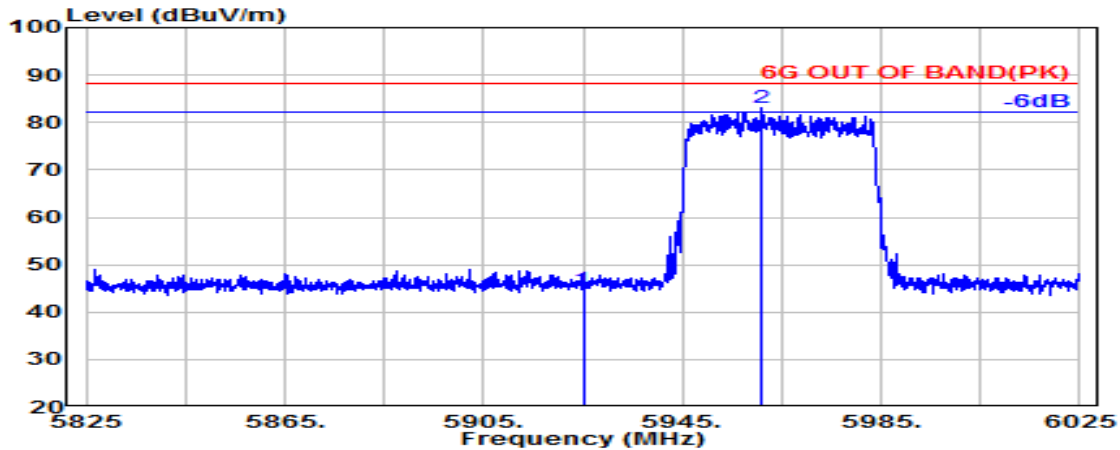

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.10	44.74	88.20	43.46	Peak
@ 5961.100	35.66	9.31	34.41	72.39	82.95	---	---	Peak

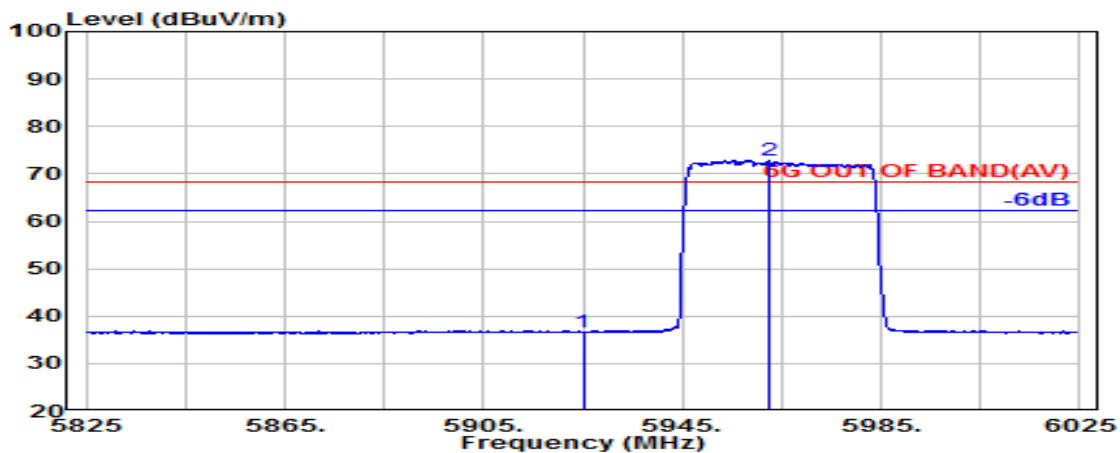


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.07	36.72	68.20	31.48	Average
@ 5962.300	35.65	9.31	34.41	62.41	72.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX5985MHz

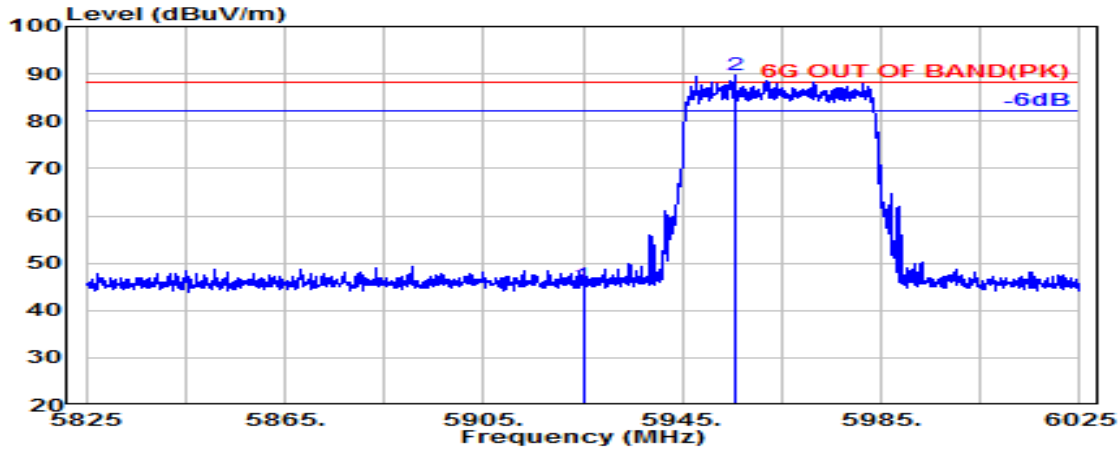

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	34.76	45.40	88.20	42.80	Peak
@ 5955.700	35.68	9.31	34.41	79.15	89.73	---	---	Peak

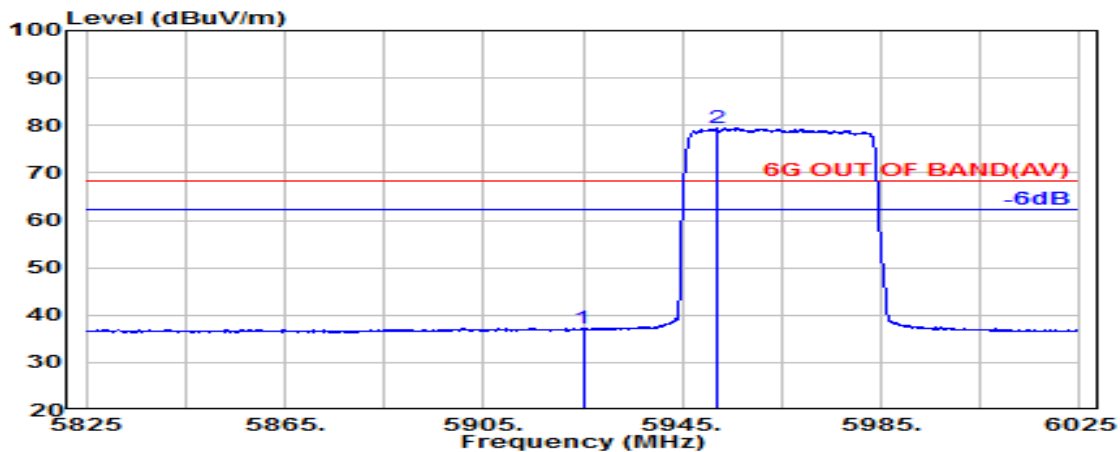


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.49	37.13	68.20	31.07	Average
@ 5951.900	35.69	9.31	34.41	68.95	79.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

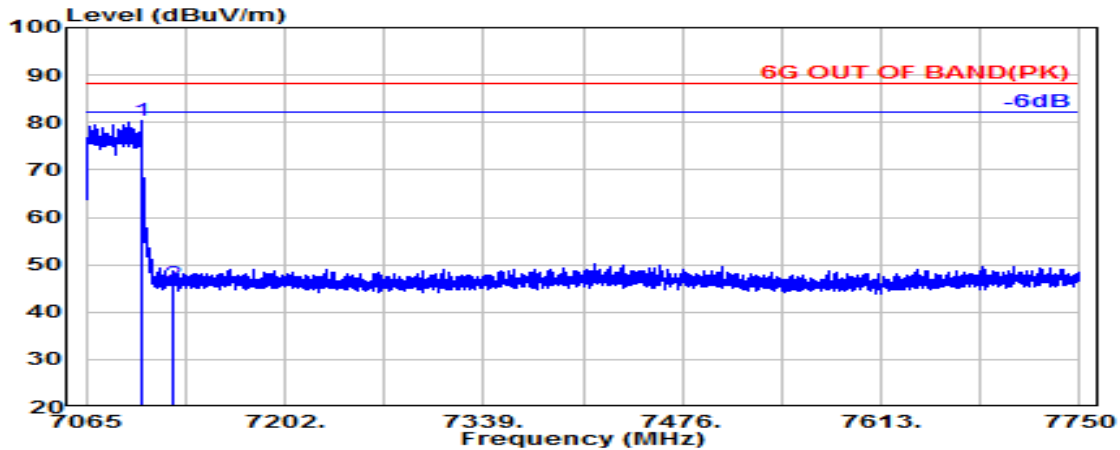

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7103.000	35.51	9.80	34.54	69.47	80.24	---	---	Peak
7125.000	35.60	9.82	34.55	35.12	45.99	88.20	42.21	Peak

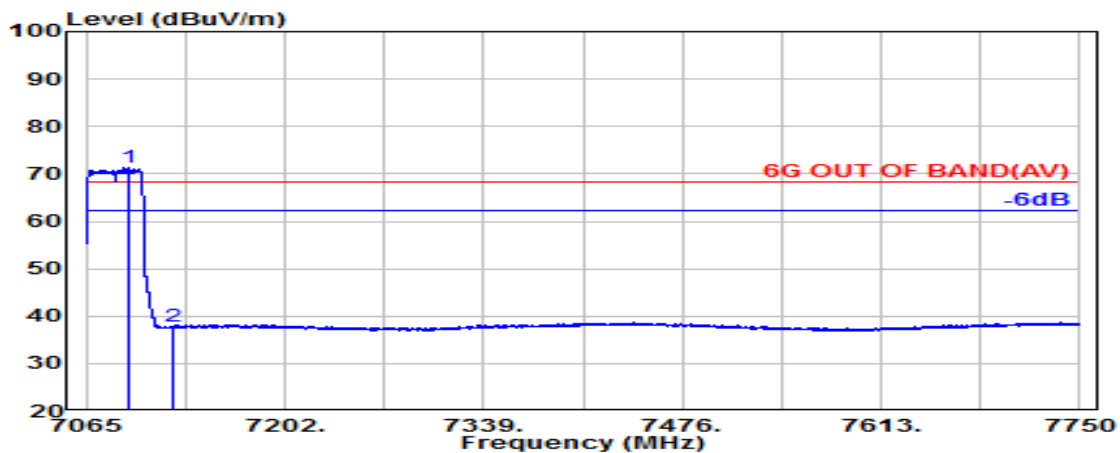


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7094.700	35.51	9.80	34.53	60.49	71.26	---	---	Average
7125.000	35.60	9.82	34.55	26.82	37.69	68.20	30.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

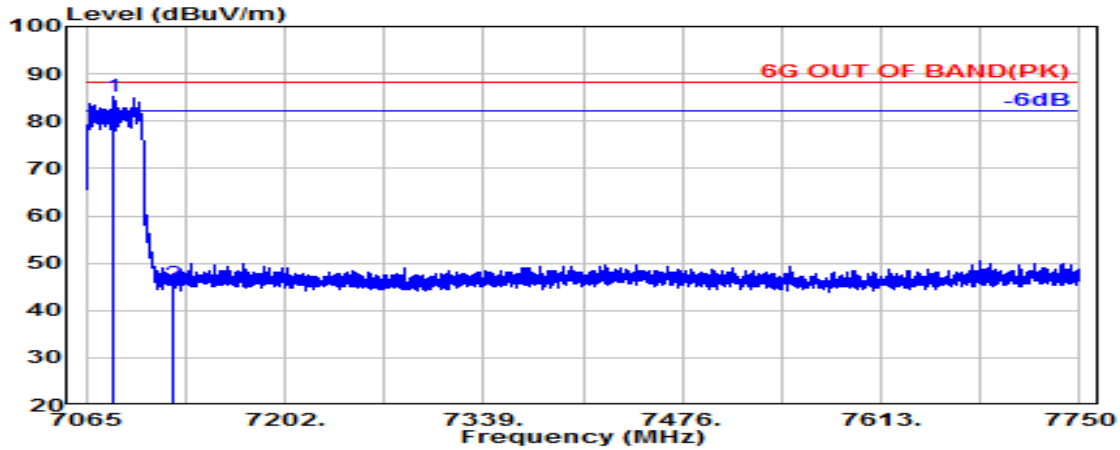

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7084.200	35.53	9.79	34.53	74.35	85.14	---	---	Peak
7125.000	35.60	9.82	34.55	34.69	45.56	88.20	42.64	Peak

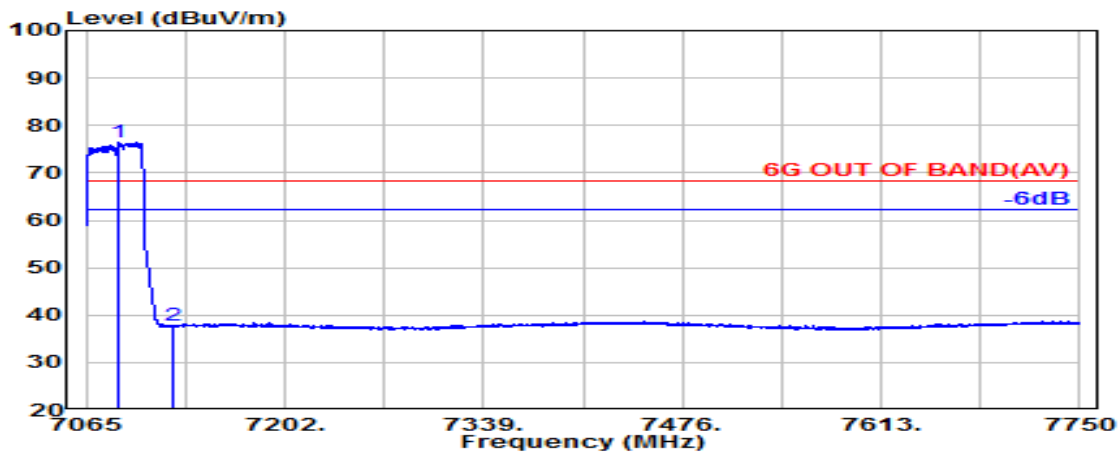


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7087.700	35.52	9.79	34.53	65.67	76.46	---	---	Average
7125.000	35.60	9.82	34.55	26.89	37.76	68.20	30.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

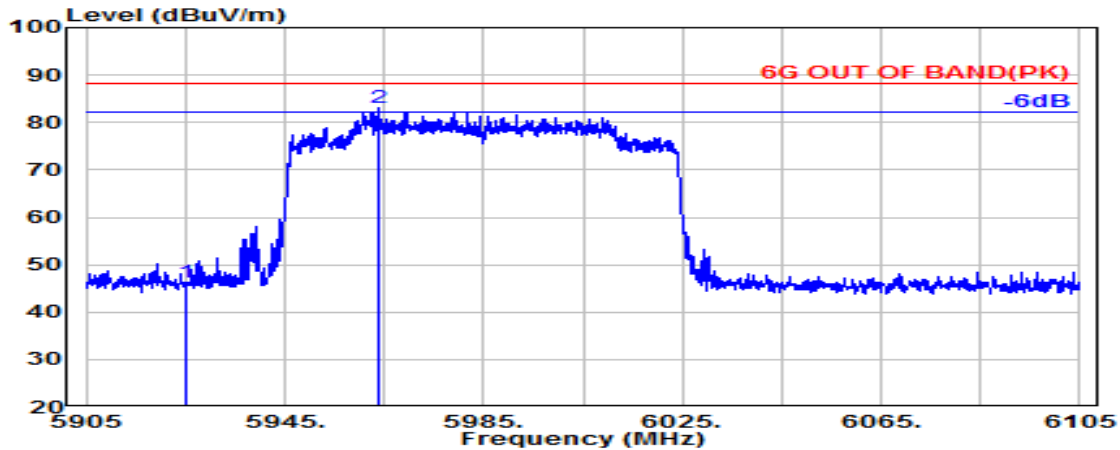

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	35.72	46.36	88.20	41.84	Peak
@ 5963.700	35.65	9.31	34.41	72.49	83.03	---	---	Peak

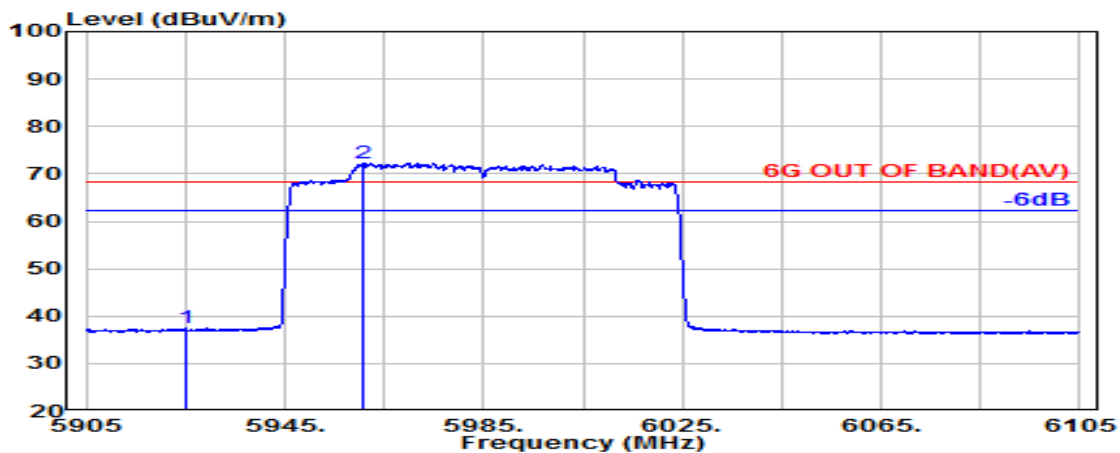


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	26.76	37.40	68.20	30.80	Average
@ 5960.800	35.66	9.31	34.41	61.76	72.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

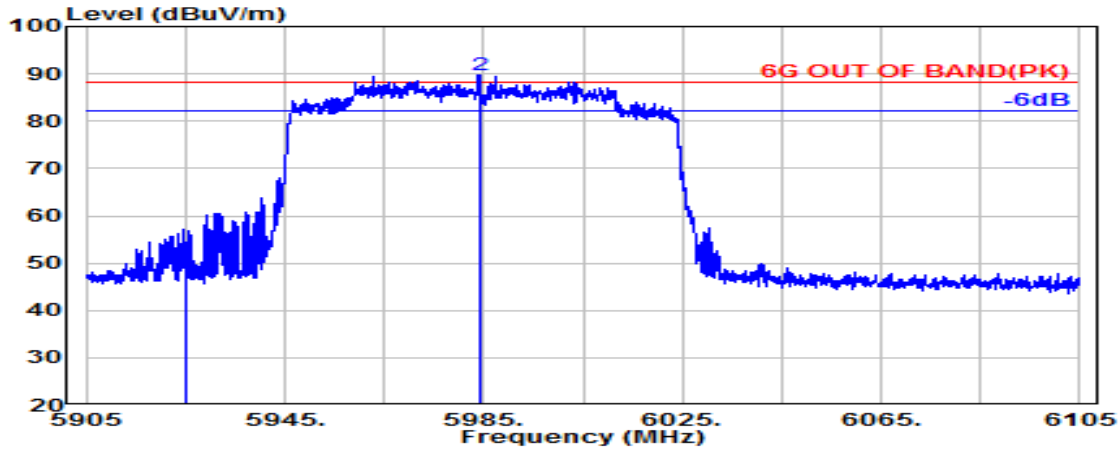

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	37.34	47.99	88.20	40.21	Peak
@ 5984.100	35.56	9.32	34.42	79.23	89.69	---	---	Peak

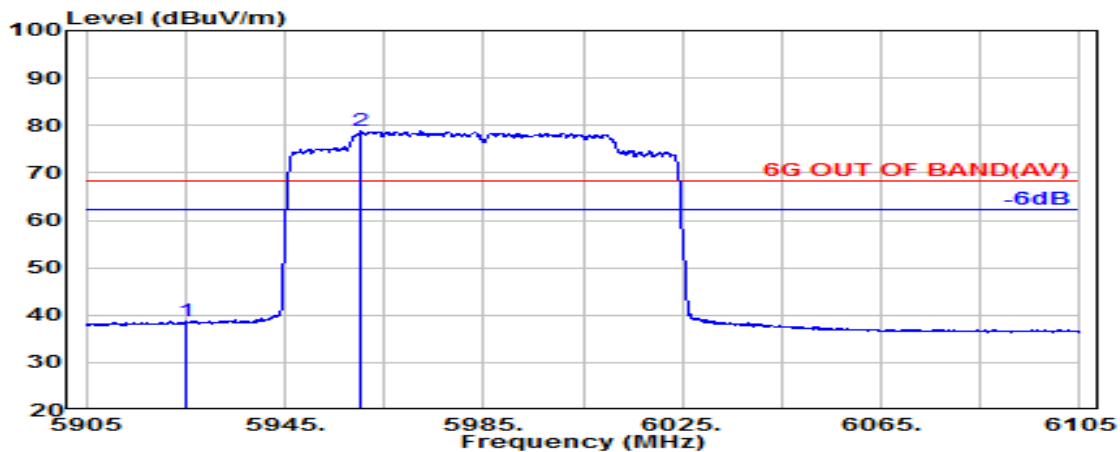


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	35.75	9.29	34.40	27.93	38.58	68.20	29.62	Average
@ 5960.100	35.66	9.31	34.41	68.27	78.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

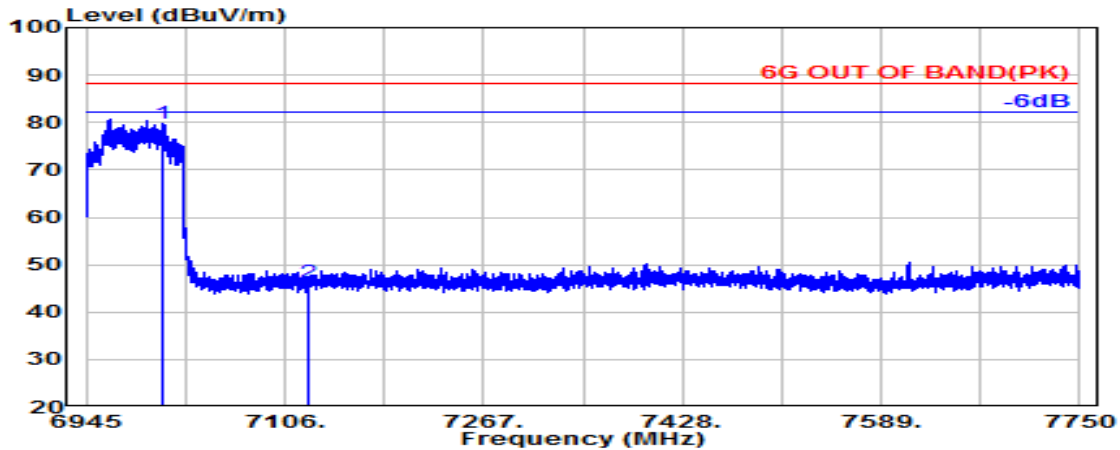

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7006.454	35.95	9.72	34.48	68.44	79.62	---	---	Peak
7125.000	35.60	9.82	34.55	35.25	46.12	88.20	42.08	Peak

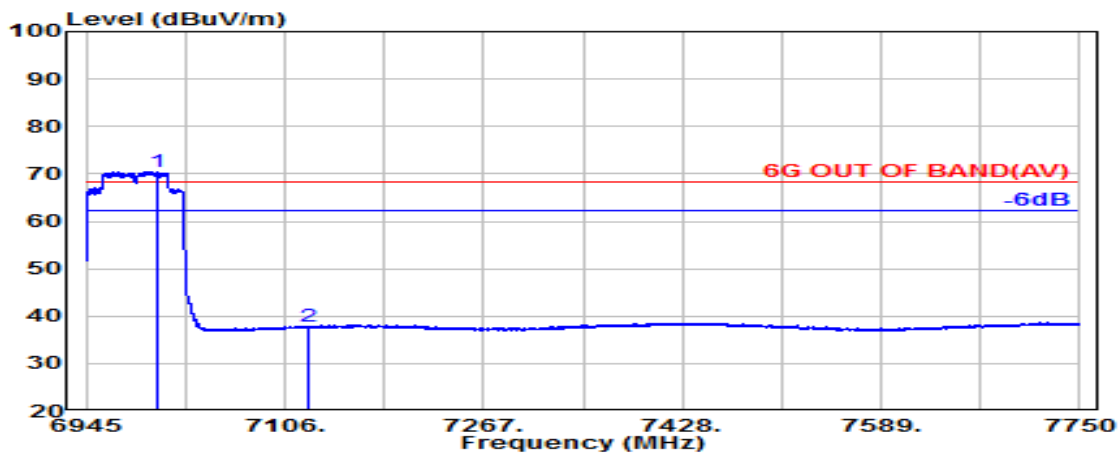


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7003.086	35.98	9.71	34.48	59.10	70.30	---	---	Average
7125.000	35.60	9.82	34.55	26.91	37.78	68.20	30.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

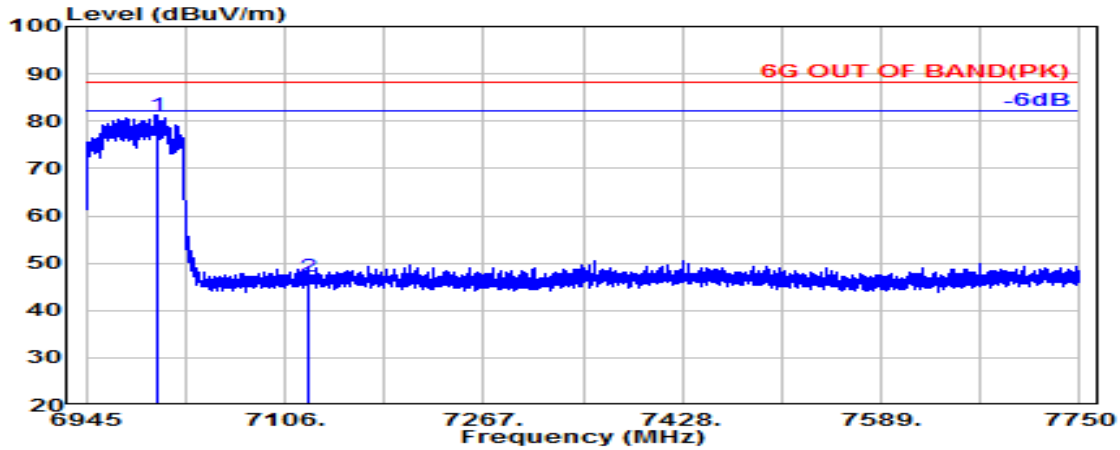

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7002.666	35.98	9.71	34.48	70.13	81.34	---	---	Peak
7125.000	35.60	9.82	34.55	36.33	47.20	88.20	41.00	Peak

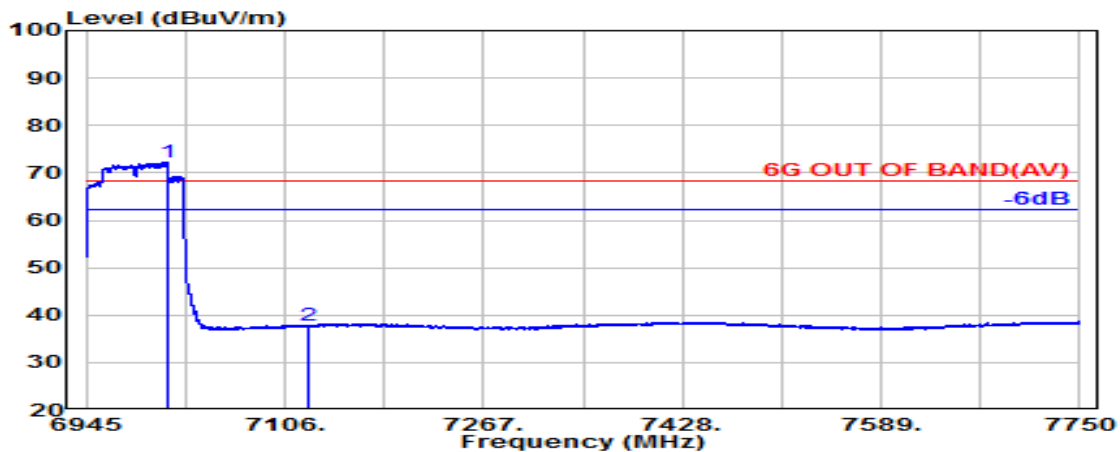

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7010.663	35.91	9.72	34.49	61.01	72.15	---	---	Average
7125.000	35.60	9.82	34.55	26.87	37.75	68.20	30.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.1.4 Band Edge-Maker Delta
 ● OFDMA Modulation


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (26T, RU Index 8)	Horizontal	76.40	55.79	20.61
	Vertical	79.29	61.62	17.67

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

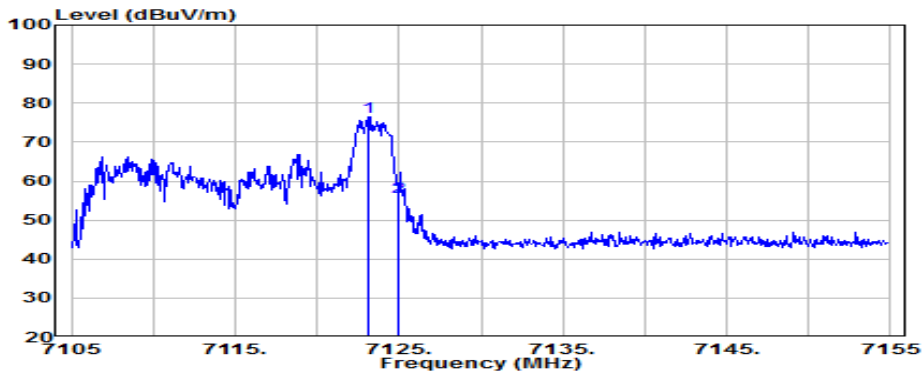

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.150	35.59	9.82	34.55	65.54	76.40	Peak
7125.000	35.60	9.82	34.55	44.92	55.79	Peak

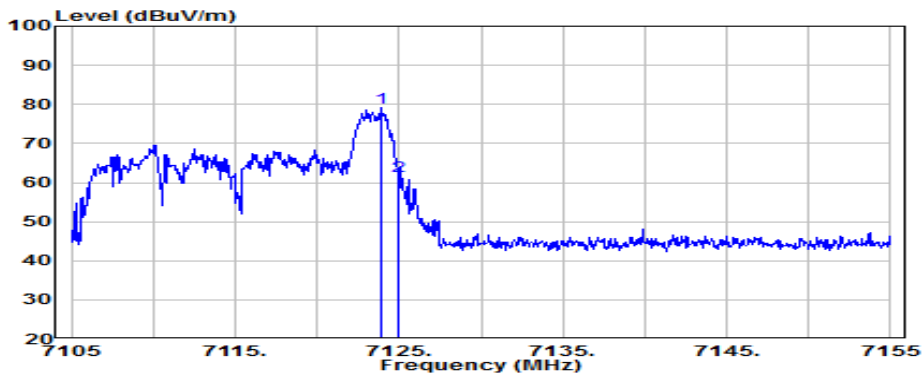

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.900	35.60	9.82	34.55	68.42	79.29	Peak
7125.000	35.60	9.82	34.55	50.75	61.62	Peak


Band Edge-Maker Delta Test Result

● OFDMA Modulation


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	84.83	20.61	64.22	88.20	23.98	Peak
	74.72	20.61	54.11	68.20	14.09	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

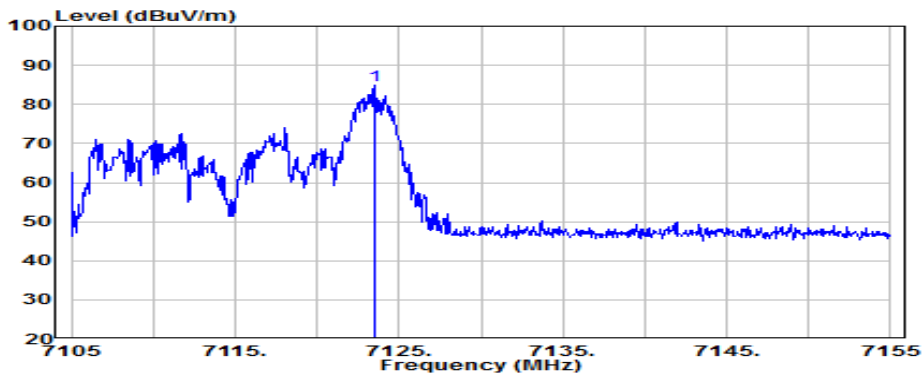

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.500	35.59	9.82	34.55	73.97	84.83	Peak

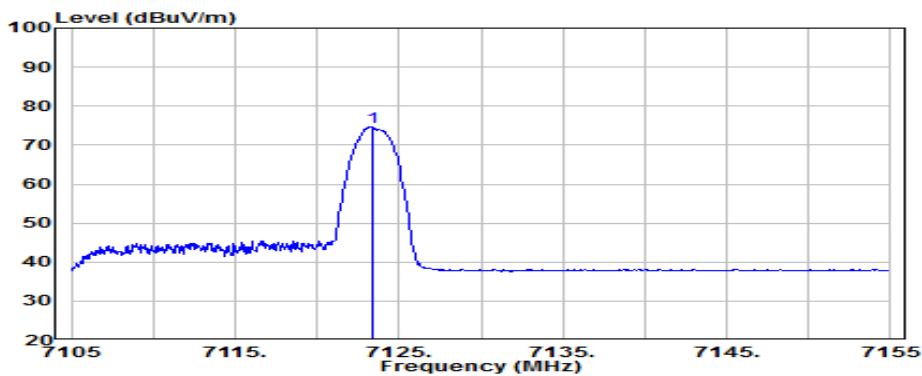


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.350	35.59	9.82	34.55	63.86	74.72	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	82.75	17.67	65.08	88.20	23.12	Peak
	74.49	17.67	56.82	68.20	11.38	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

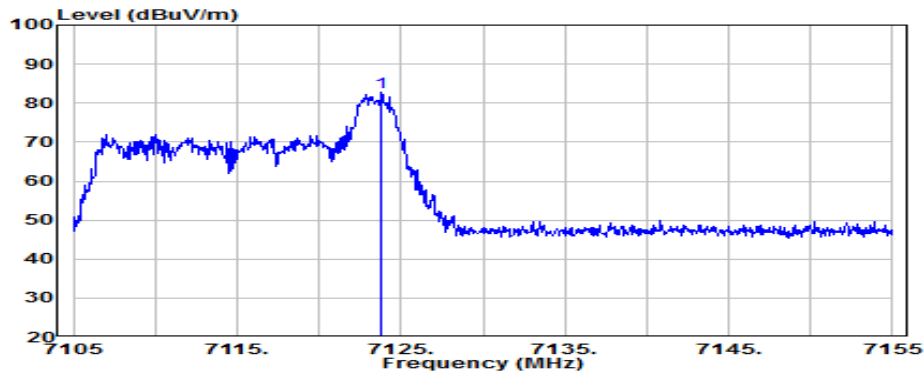

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.800	35.60	9.82	34.55	71.88	82.75	Peak

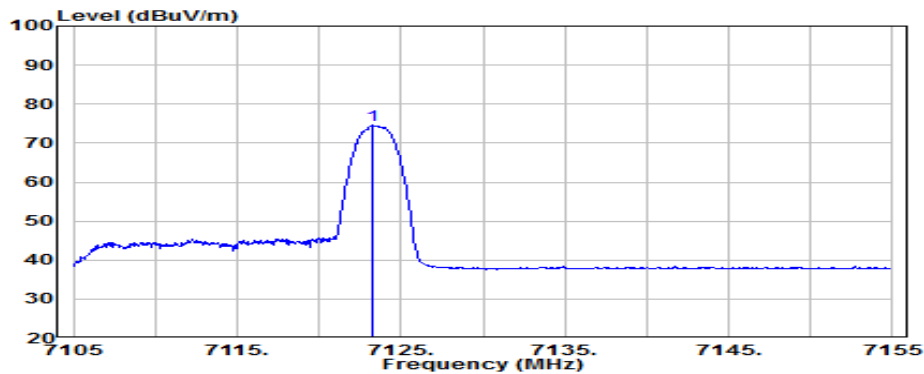

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.300	35.59	9.82	34.55	63.63	74.49	Average

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

● OFDM Modulation

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.80	14.05	34.51	31.45	49.79	54.00	4.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.80	14.05	34.51	31.71	50.05	54.00	3.95	Peak

Mode	802.11ax-HE20	U-NII Band	6
		Frequency	TX 6515MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.14	15.03	33.20	30.26	51.22	54.00	2.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.14	15.03	33.20	29.36	50.32	54.00	3.68	Peak

Mode	802.11ax-HE20	U-NII Band	7
		Frequency	TX 6535MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.06	15.06	33.17	31.03	51.98	54.00	2.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.06	15.06	33.17	31.10	52.05	54.00	1.95	Peak

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 6875MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	38.80	15.65	32.82	30.46	52.09	54.00	1.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	38.80	15.65	32.82	31.53	53.16	54.00	0.84	Peak

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.80	14.07	34.51	31.45	49.80	54.00	4.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.80	14.07	34.51	31.20	49.56	54.00	4.44	Peak

Mode	802.11ax-HE40	U-NII Band	6
		Frequency	TX 6485MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.17	14.98	33.28	29.72	50.58	54.00	3.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.17	14.98	33.28	30.58	51.45	54.00	2.55	Peak

Mode	802.11ax-HE40	U-NII Band	7
		Frequency	TX 6525MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.10	15.04	33.19	30.72	51.68	54.00	2.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.10	15.04	33.19	29.91	50.87	54.00	3.13	Peak

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	39.20	15.98	33.03	30.31	52.46	54.00	1.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	39.20	15.98	33.03	30.93	53.08	54.00	0.92	Peak

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.80	14.11	34.52	32.08	50.47	54.00	3.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.80	14.11	34.52	32.42	50.80	54.00	3.20	Peak

Mode	802.11ax-HE80	U-NII Band	6
		Frequency	TX 6465MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12930.000	39.13	14.94	33.34	30.59	51.32	54.00	2.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12930.000	39.13	14.94	33.34	29.52	50.25	54.00	3.75	Peak

Mode	802.11ax-HE80	U-NII Band	7
		Frequency	TX 6625MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	39.15	15.22	33.02	29.72	51.07	54.00	2.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	39.15	15.22	33.02	29.29	50.64	54.00	3.36	Peak

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 6945MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	38.98	15.77	32.83	30.69	52.61	54.00	1.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	38.98	15.77	32.83	30.56	52.48	54.00	1.52	Peak

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	38.90	14.18	34.48	32.50	51.10	54.00	2.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	38.90	14.18	34.48	31.64	50.24	54.00	3.76	Peak

Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.18	15.01	33.22	29.02	49.99	54.00	4.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.18	15.01	33.22	30.57	51.53	54.00	2.47	Peak

Mode	802.11ax-HE160	U-NII Band	7
		Frequency	TX 6665MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	39.24	15.29	32.95	29.56	51.14	54.00	2.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	39.24	15.29	32.95	29.90	51.48	54.00	2.52	Peak

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	39.00	15.84	32.83	31.53	53.53	54.00	0.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	39.00	15.84	32.83	29.31	51.32	54.00	2.68	Peak

● OFDMA Modulation

Tones	26T	RU Index	18
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.80	14.11	34.52	30.60	48.99	54.00	5.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.80	14.11	34.52	30.87	49.26	54.00	4.74	Peak

Tones	52T	RU Index	39
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.80	14.05	34.51	31.01	49.35	54.00	4.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.80	14.05	34.51	31.15	49.49	54.00	4.51	Peak

Tones	106T	RU Index	56
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11970.000	38.80	14.11	34.52	31.95	50.34	54.00	3.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11970.000	38.80	14.11	34.52	31.08	49.47	54.00	4.53	Peak

Tones	242T	RU Index	62
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6185MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
12370.000	38.93	14.47	34.18	31.16	50.38	54.00	3.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
12370.000	38.93	14.47	34.18	30.73	49.94	54.00	4.06	Peak

Tones	484T	RU Index	65
Mode	802.11ax-HE80	U-NII Band	6
		Frequency	TX 6545MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.02	15.08	33.15	31.48	52.42	54.00	1.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.02	15.08	33.15	31.33	52.28	54.00	1.72	Peak

Tones	996T	RU Index	67
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6345MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12690.000	39.10	14.74	33.74	30.56	50.66	54.00	3.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12690.000	39.10	14.74	33.74	31.44	51.54	54.00	2.46	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.