



| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 1 |
| | | Frequency | TX 5190MHz |

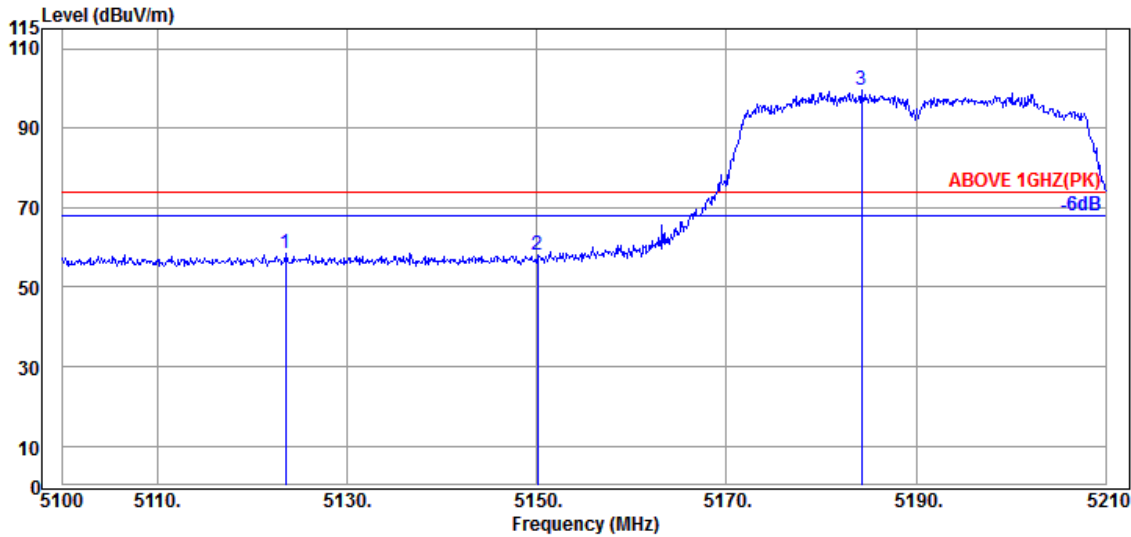

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5123.540 | 34.30 | 8.87 | 34.34 | 49.54 | 58.37 | 74.00 | 15.63 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 48.92 | 57.96 | 74.00 | 16.04 | Peak |
| @ 5184.260 | 34.63 | 8.90 | 34.32 | 90.21 | 99.42 | --- | --- | Peak |

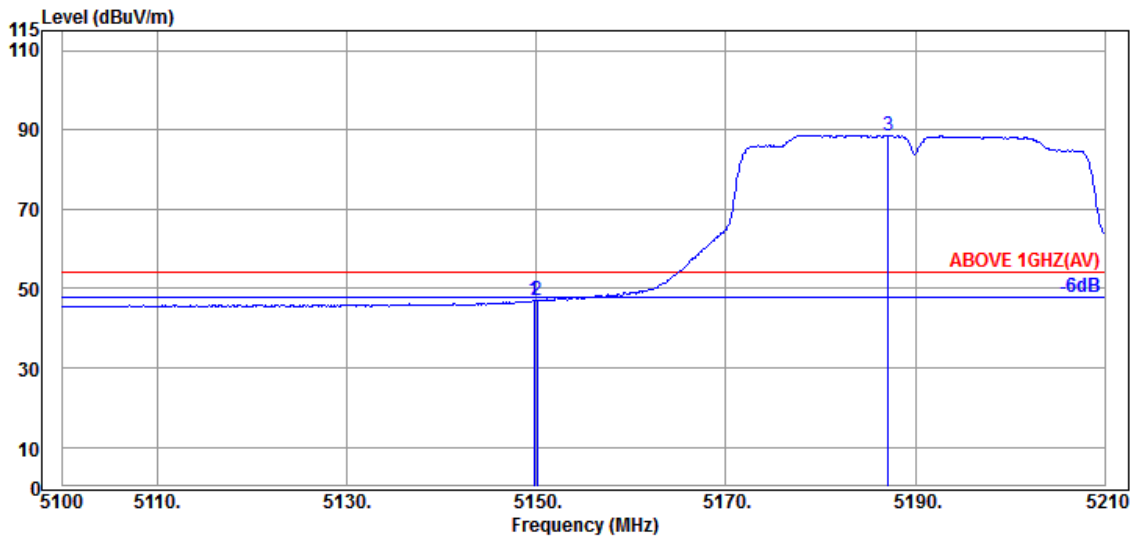


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720 | 34.50 | 8.88 | 34.34 | 37.90 | 46.94 | 54.00 | 7.06 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 37.96 | 47.00 | 54.00 | 7.00 | Average |
| @ 5187.120 | 34.70 | 8.91 | 34.32 | 79.39 | 88.68 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 1 |
| | | Frequency | TX 5190MHz |

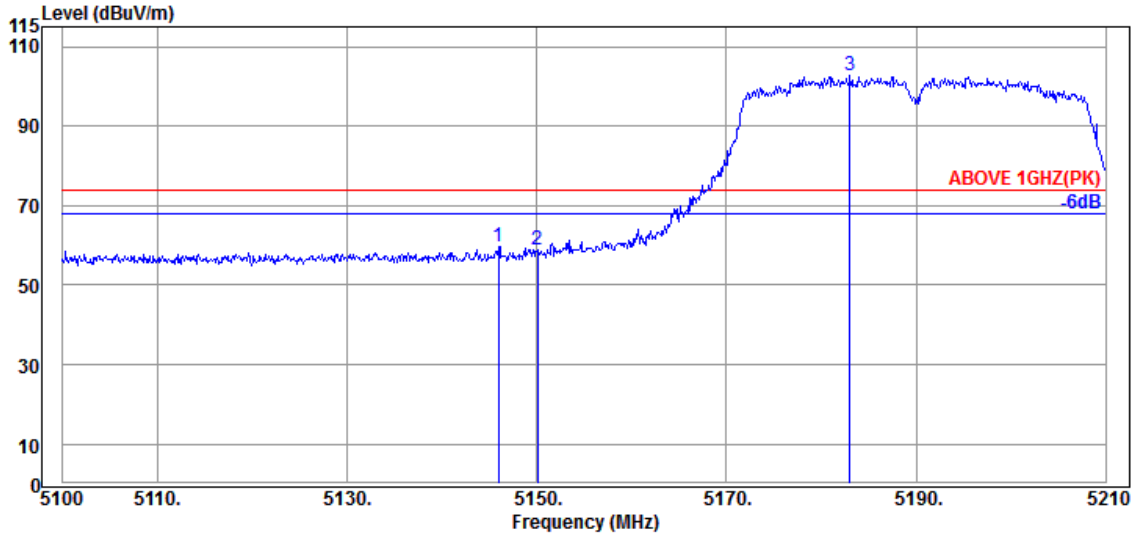

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.980 | 34.50 | 8.88 | 34.34 | 50.78 | 59.82 | 74.00 | 14.18 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 49.95 | 58.99 | 74.00 | 15.01 | Peak |
| @ 5183.050 | 34.63 | 8.90 | 34.32 | 93.51 | 102.72 | --- | --- | Peak |

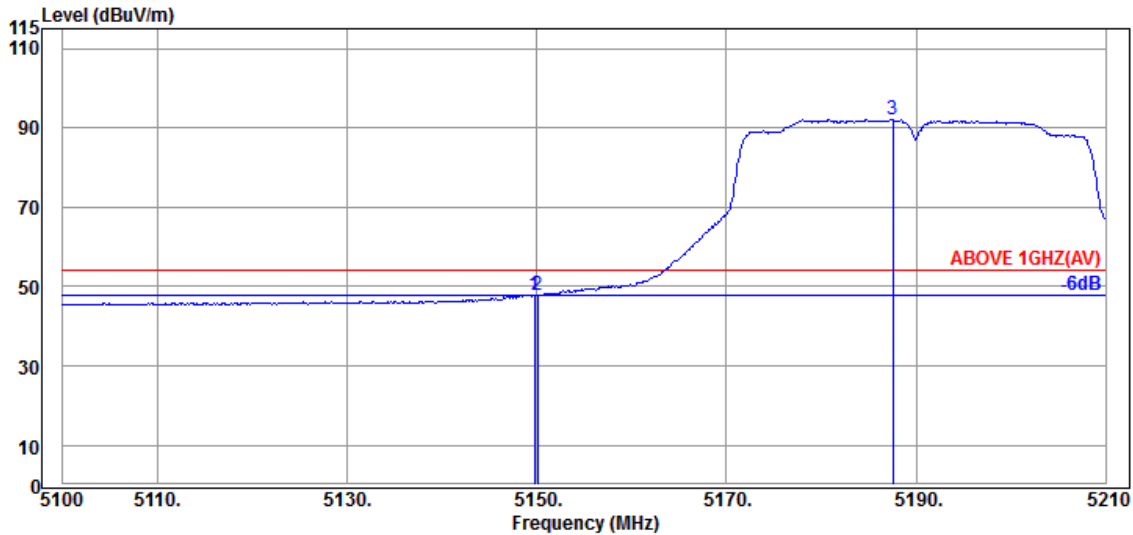


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720 | 34.50 | 8.88 | 34.34 | 38.76 | 47.80 | 54.00 | 6.20 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 38.76 | 47.80 | 54.00 | 6.20 | Average |
| @ 5187.560 | 34.70 | 8.91 | 34.32 | 82.80 | 92.09 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A |
| | | Frequency | TX 5310MHz |

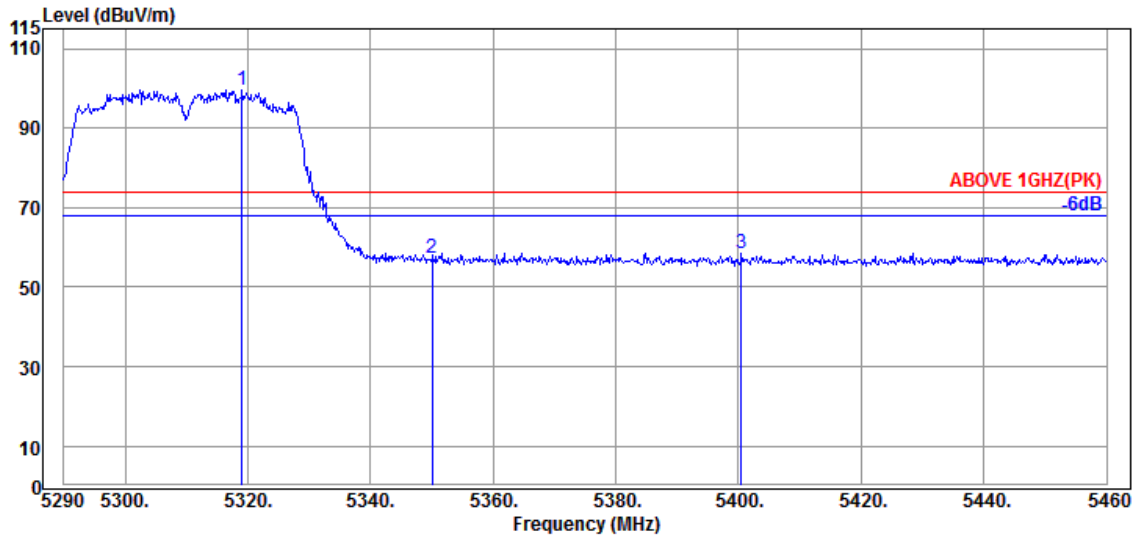

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5319.070 | 34.57 | 8.98 | 34.27 | 90.41 | 99.69 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 47.68 | 57.31 | 74.00 | 16.69 | Peak |
| 5400.500 | 34.80 | 9.02 | 34.23 | 49.00 | 58.59 | 74.00 | 15.41 | Peak |

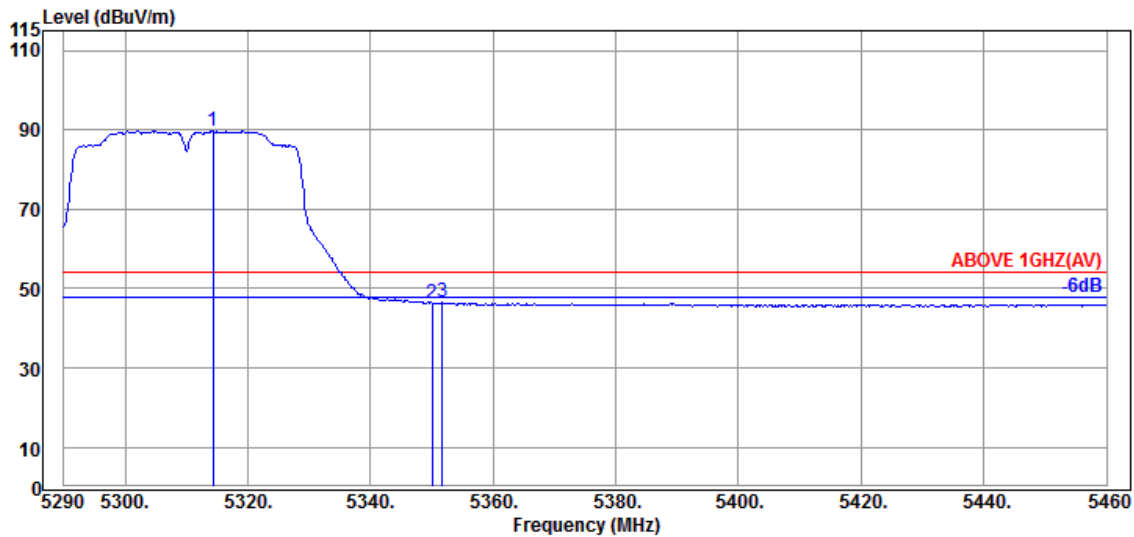


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5314.310 | 34.57 | 8.98 | 34.27 | 80.47 | 89.75 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 36.74 | 46.37 | 54.00 | 7.63 | Average |
| 5351.710 | 34.90 | 8.99 | 34.26 | 36.81 | 46.44 | 54.00 | 7.56 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A |
| | | Frequency | TX 5310MHz |

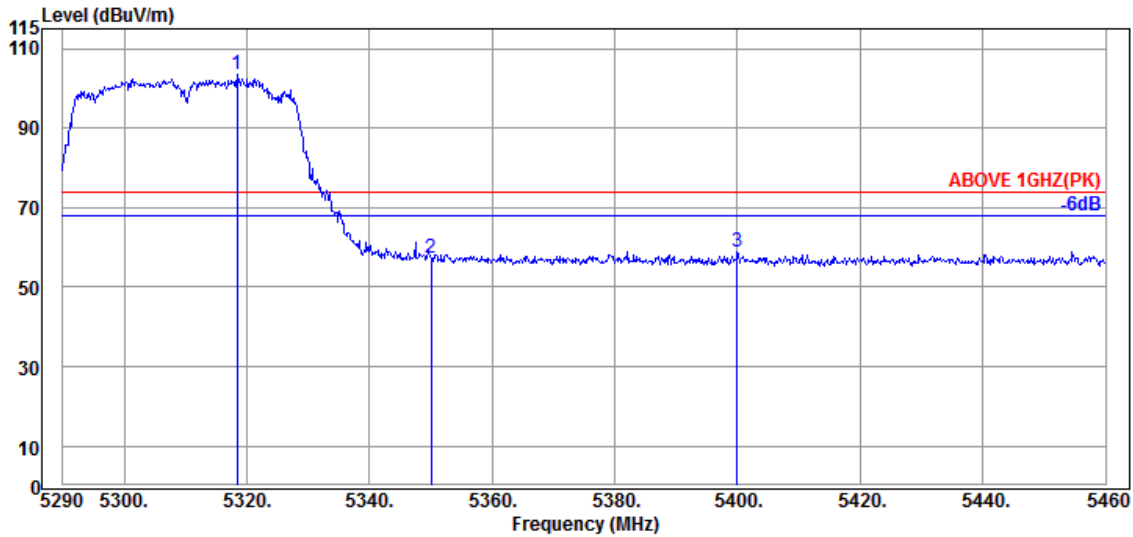

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.390 | 34.57 | 8.98 | 34.27 | 94.09 | 103.37 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 47.65 | 57.28 | 74.00 | 16.72 | Peak |
| 5399.990 | 34.80 | 9.02 | 34.23 | 49.21 | 58.80 | 74.00 | 15.20 | Peak |

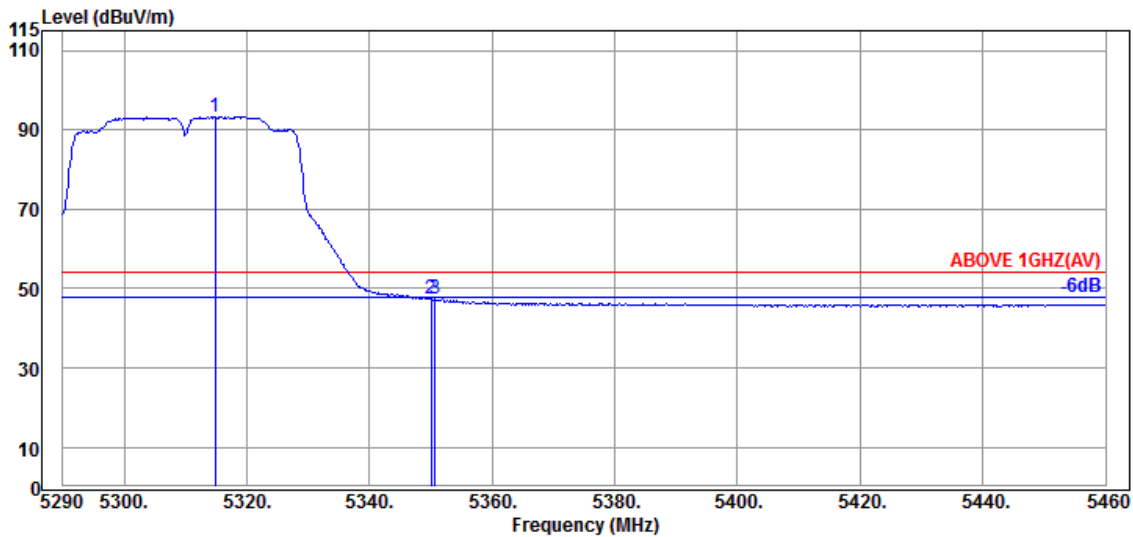


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5314.820 | 34.57 | 8.98 | 34.27 | 84.02 | 93.30 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 37.78 | 47.41 | 54.00 | 6.59 | Average |
| 5350.690 | 34.90 | 8.99 | 34.26 | 37.98 | 47.61 | 54.00 | 6.39 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

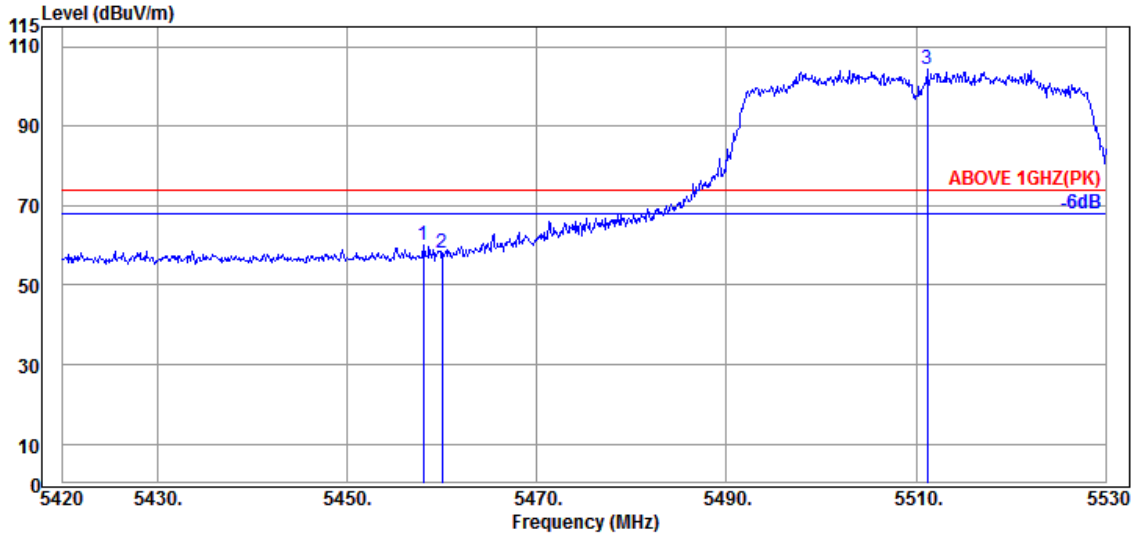

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.060 | 34.60 | 9.05 | 34.21 | 50.68 | 60.12 | 74.00 | 13.88 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 48.77 | 58.21 | 74.00 | 15.79 | Peak |
| @ 5511.190 | 34.70 | 9.09 | 34.21 | 94.65 | 104.23 | --- | --- | Peak |

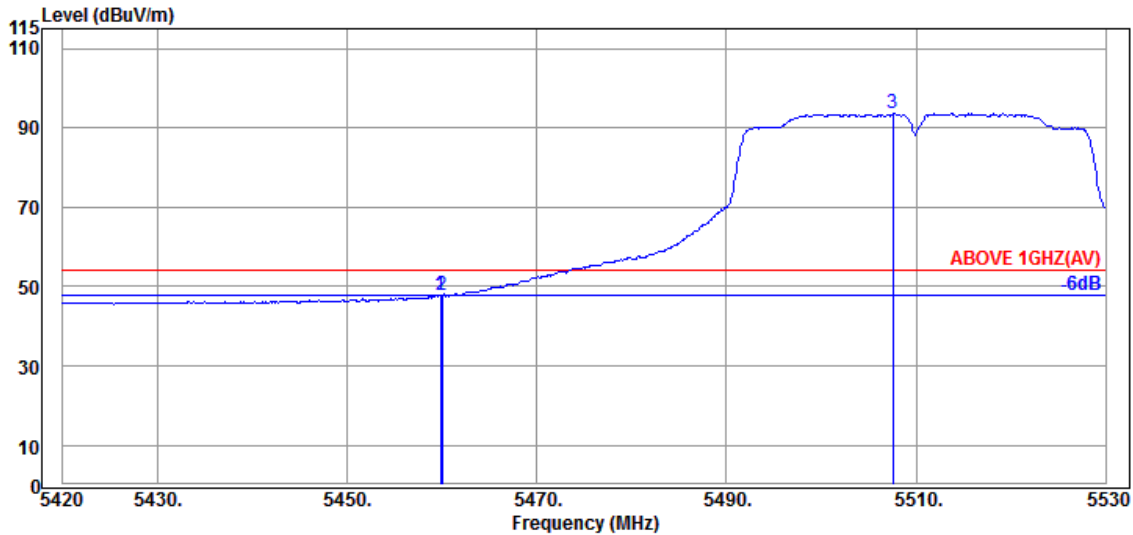


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.820 | 34.60 | 9.05 | 34.21 | 38.31 | 47.75 | 54.00 | 6.25 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 38.45 | 47.89 | 54.00 | 6.11 | Average |
| @ 5507.560 | 34.70 | 9.08 | 34.21 | 84.10 | 93.67 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

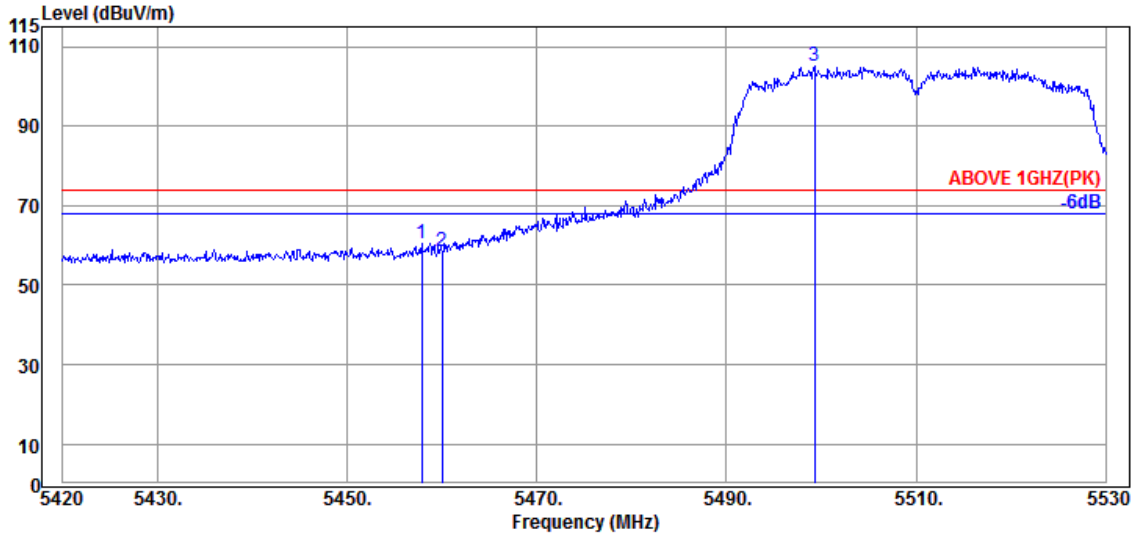

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.840 | 34.60 | 9.05 | 34.21 | 51.14 | 60.58 | 74.00 | 13.42 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 48.94 | 58.38 | 74.00 | 15.62 | Peak |
| @ 5499.310 | 34.70 | 9.08 | 34.20 | 95.59 | 105.17 | --- | --- | Peak |

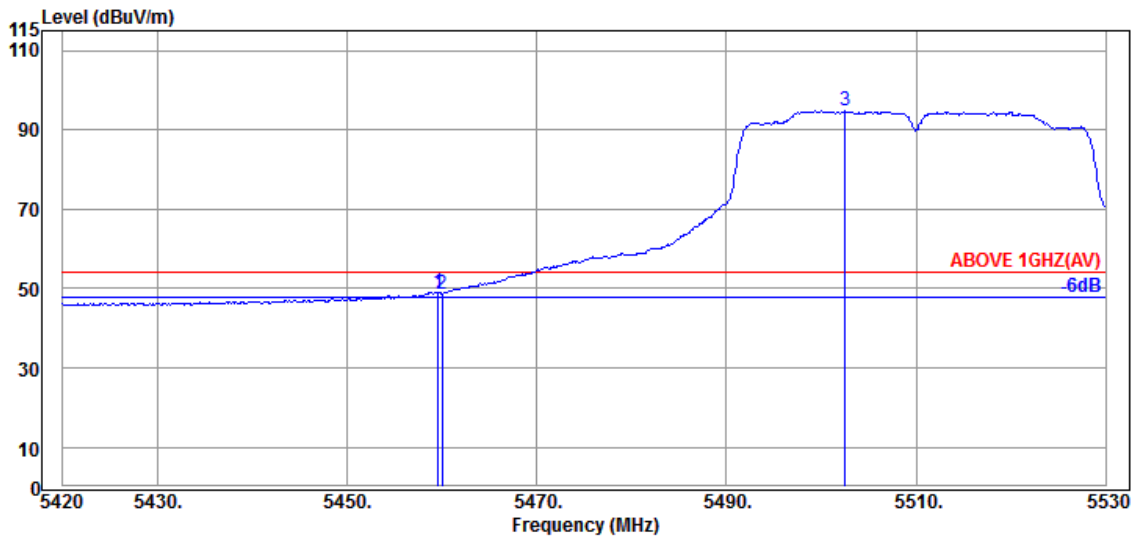


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.600 | 34.60 | 9.05 | 34.21 | 39.64 | 49.08 | 54.00 | 4.92 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 39.36 | 48.80 | 54.00 | 5.20 | Average |
| @ 5502.500 | 34.70 | 9.08 | 34.20 | 85.15 | 94.73 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

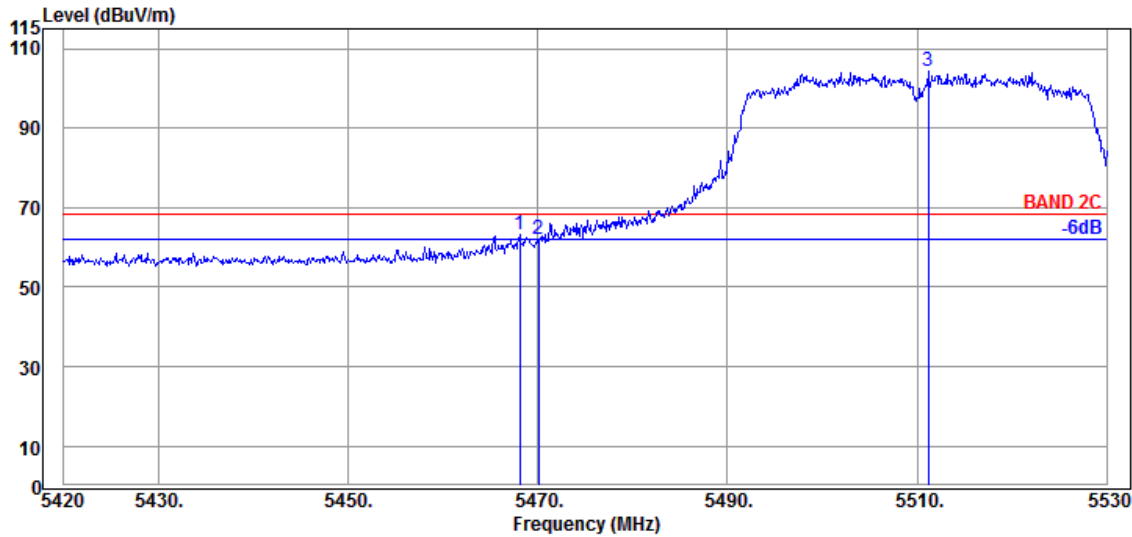

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.070 | 34.63 | 9.06 | 34.21 | 53.82 | 63.30 | 68.20 | 4.90 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 52.40 | 61.88 | 68.20 | 6.32 | Peak |
| @ 5511.190 | 34.70 | 9.09 | 34.21 | 94.65 | 104.23 | --- | --- | Peak |

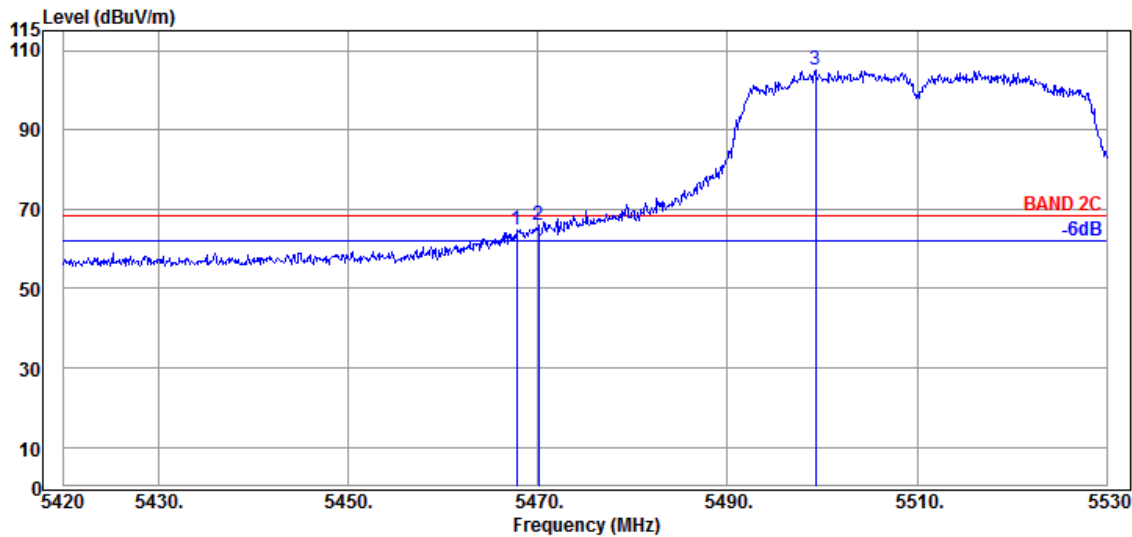


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.740 | 34.63 | 9.06 | 34.21 | 55.16 | 64.64 | 68.20 | 3.56 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 56.57 | 66.05 | 68.20 | 2.15 | Peak |
| @ 5499.310 | 34.70 | 9.08 | 34.20 | 95.59 | 105.17 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5670MHz |

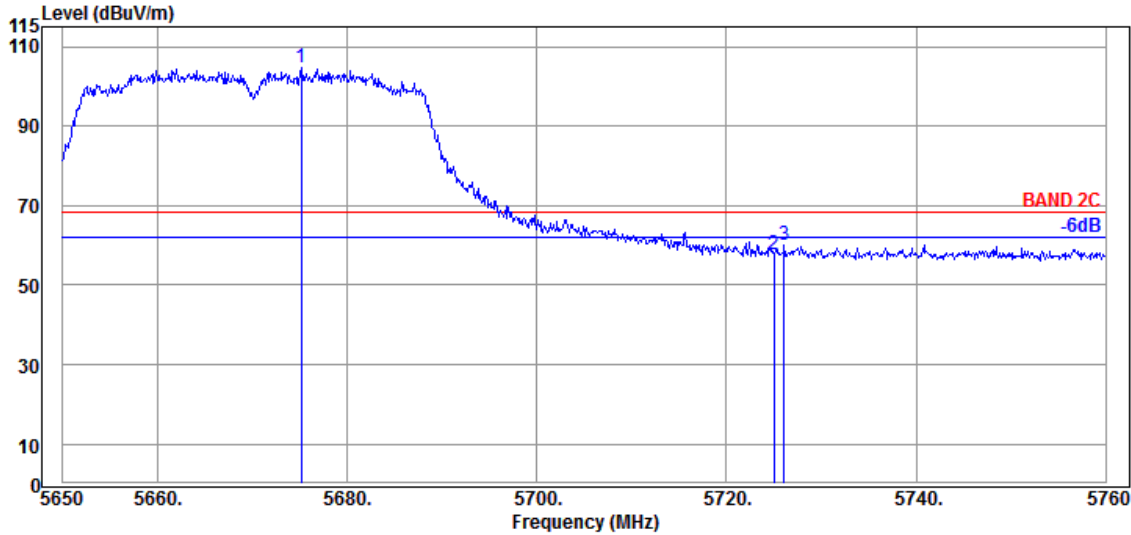

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5675.190 | 34.63 | 9.17 | 34.29 | 95.02 | 104.53 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 47.75 | 57.55 | 68.20 | 10.65 | Peak |
| 5726.120 | 34.90 | 9.20 | 34.30 | 50.20 | 60.00 | 68.20 | 8.20 | Peak |

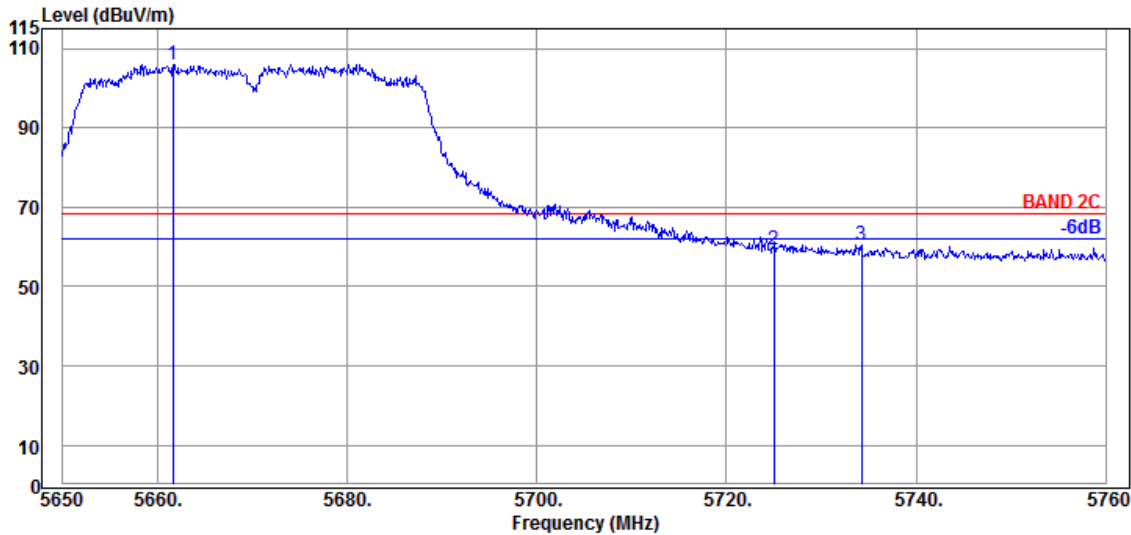


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5661.660 | 34.57 | 9.16 | 34.28 | 96.62 | 106.07 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 49.40 | 59.20 | 68.20 | 9.00 | Peak |
| 5734.260 | 34.90 | 9.20 | 34.31 | 50.69 | 60.48 | 68.20 | 7.72 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

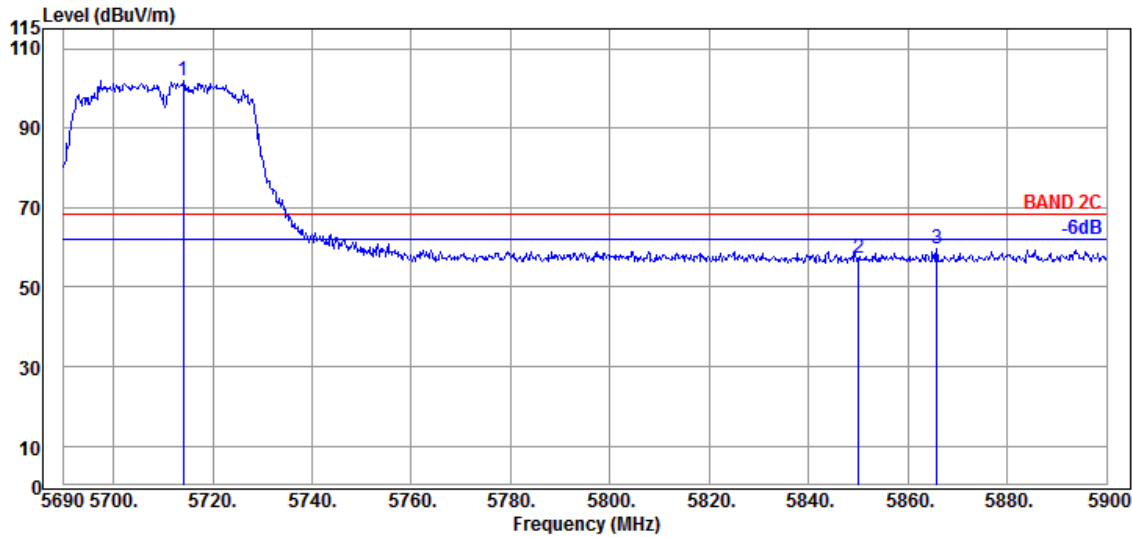

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5714.150 | 34.80 | 9.19 | 34.30 | 92.33 | 102.02 | --- | --- | Peak |
| 5850.020 | 35.40 | 9.25 | 34.36 | 47.17 | 57.46 | 68.20 | 10.74 | Peak |
| 5865.770 | 35.53 | 9.26 | 34.37 | 49.19 | 59.61 | 68.20 | 8.59 | Peak |

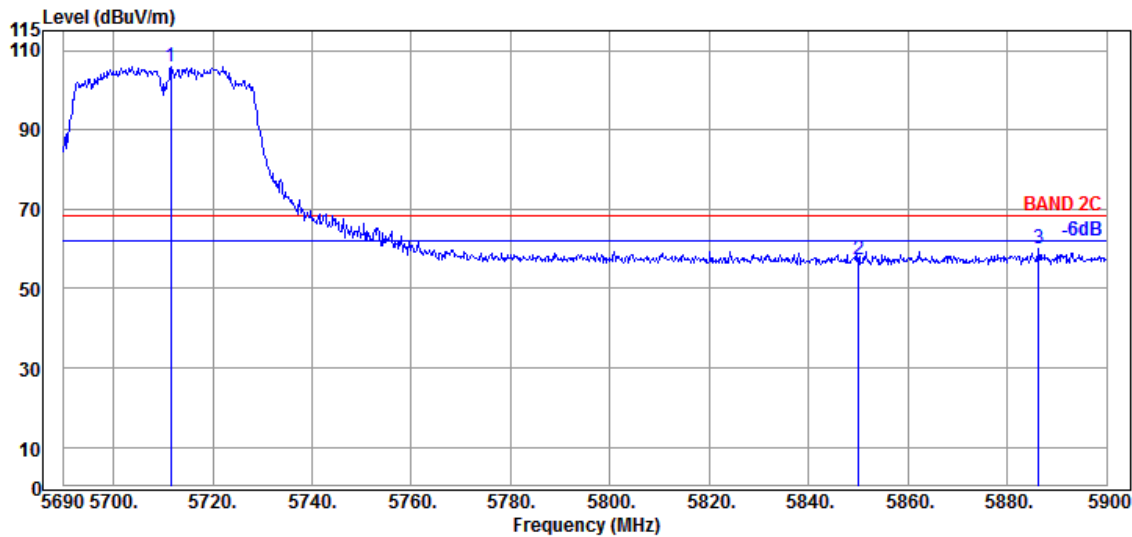


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5711.630 | 34.80 | 9.19 | 34.30 | 96.32 | 106.01 | --- | --- | Peak |
| 5850.020 | 35.40 | 9.25 | 34.36 | 46.98 | 57.27 | 68.20 | 10.93 | Peak |
| 5886.350 | 35.67 | 9.27 | 34.38 | 49.62 | 60.18 | 68.20 | 8.02 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

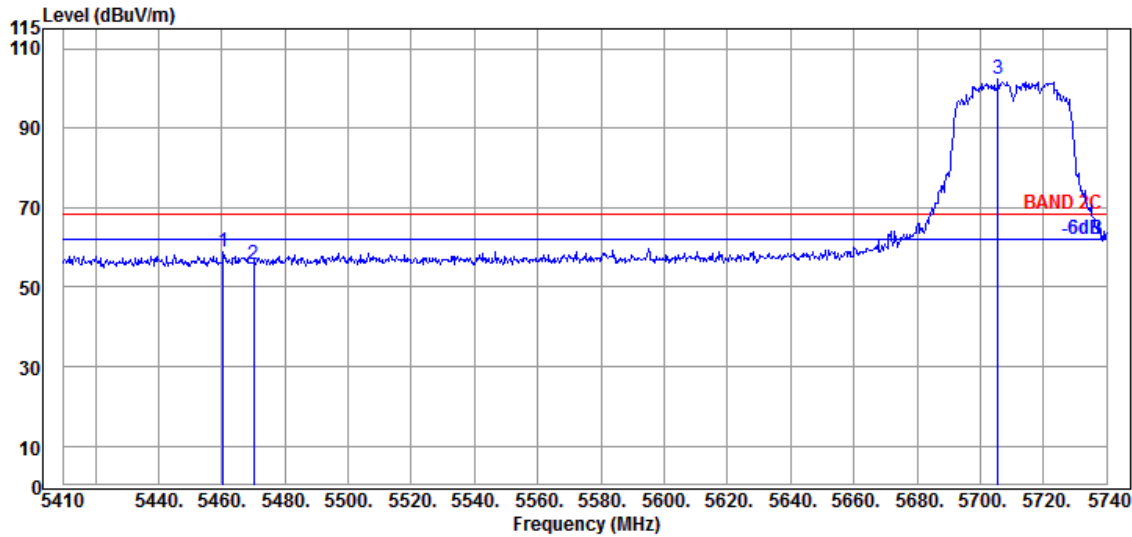

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5460.490 | 34.60 | 9.05 | 34.21 | 49.25 | 58.69 | 68.20 | 9.51 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 46.31 | 55.79 | 68.20 | 12.41 | Peak |
| @ 5705.680 | 34.80 | 9.19 | 34.29 | 92.53 | 102.23 | --- | --- | Peak |

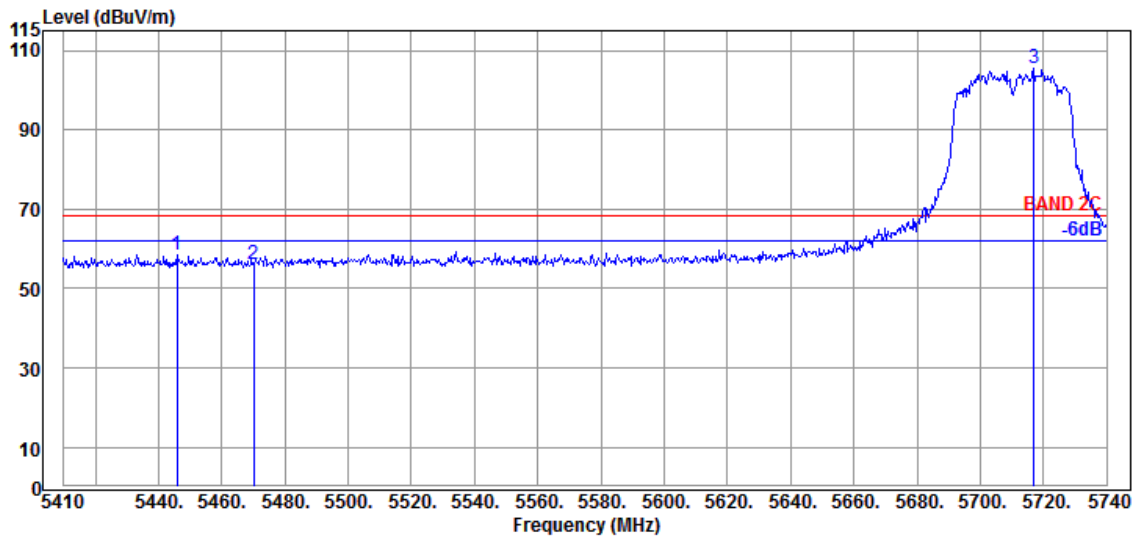


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5445.970 | 34.65 | 9.04 | 34.22 | 49.05 | 58.52 | 68.20 | 9.68 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 46.59 | 56.07 | 68.20 | 12.13 | Peak |
| @ 5716.900 | 34.80 | 9.19 | 34.30 | 95.73 | 105.42 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

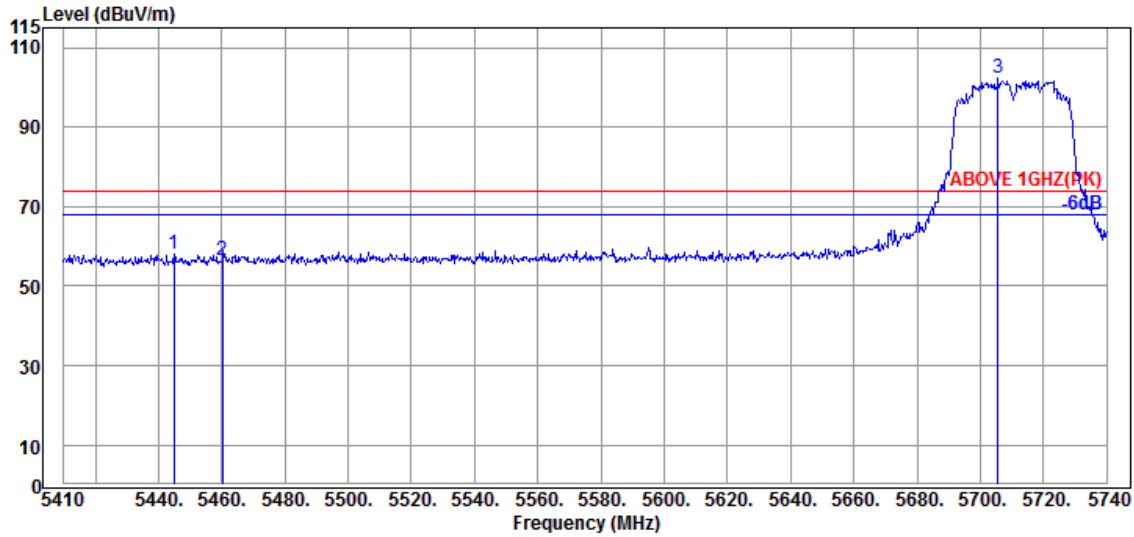

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5444.980 | 34.65 | 9.04 | 34.22 | 48.52 | 57.99 | 74.00 | 16.01 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 46.94 | 56.38 | 74.00 | 17.62 | Peak |
| @ 5705.680 | 34.80 | 9.19 | 34.29 | 92.53 | 102.23 | --- | --- | Peak |

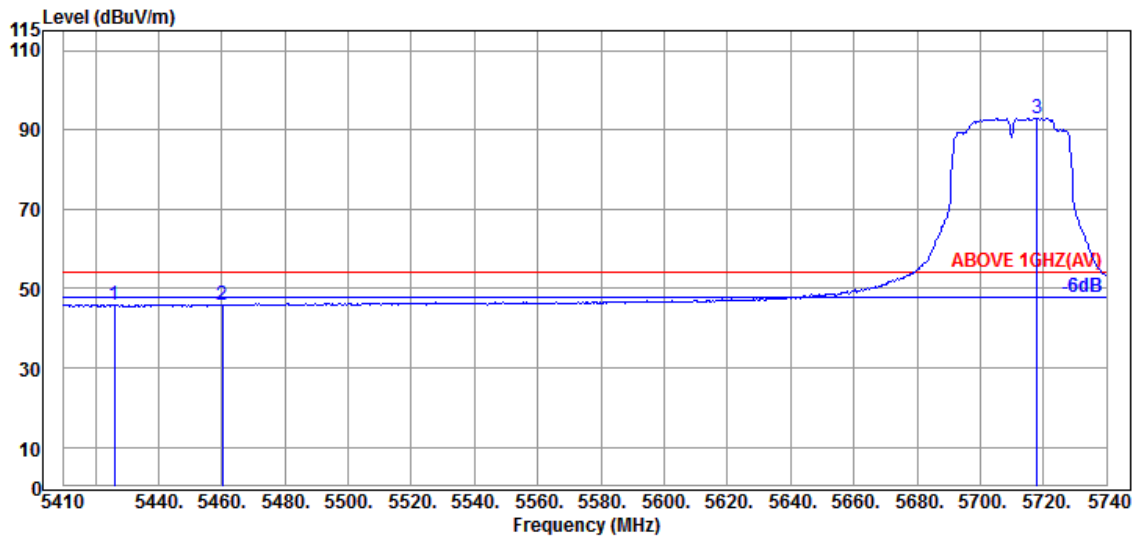


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5426.170 | 34.70 | 9.04 | 34.23 | 36.40 | 45.91 | 54.00 | 8.09 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.47 | 45.91 | 54.00 | 8.09 | Average |
| @ 5717.890 | 34.80 | 9.19 | 34.30 | 83.32 | 93.01 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

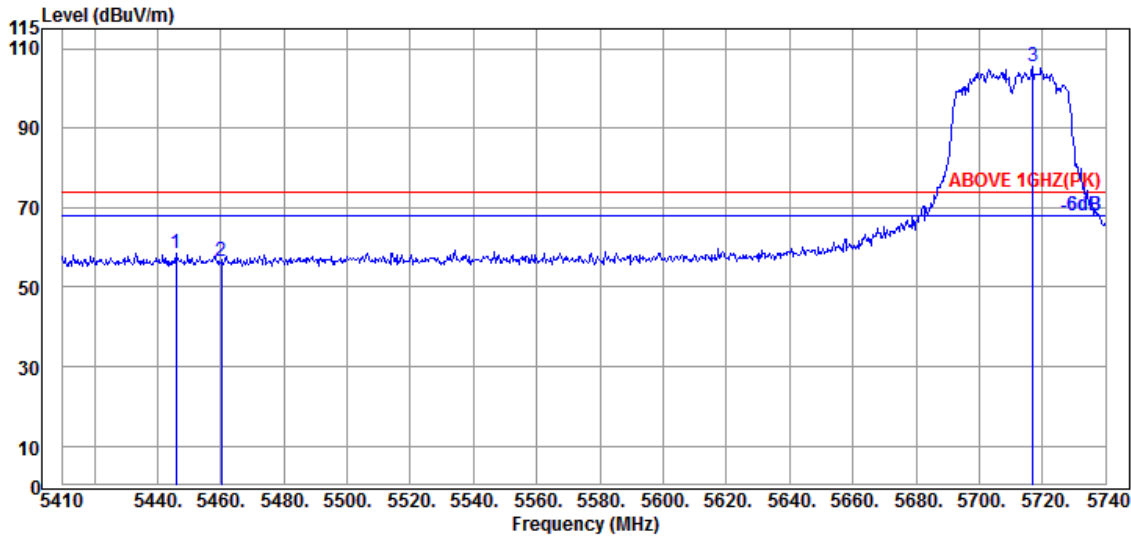

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5445.970 | 34.65 | 9.04 | 34.22 | 49.05 | 58.52 | 74.00 | 15.48 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 46.93 | 56.37 | 74.00 | 17.63 | Peak |
| @ 5716.900 | 34.80 | 9.19 | 34.30 | 95.73 | 105.42 | --- | --- | Peak |

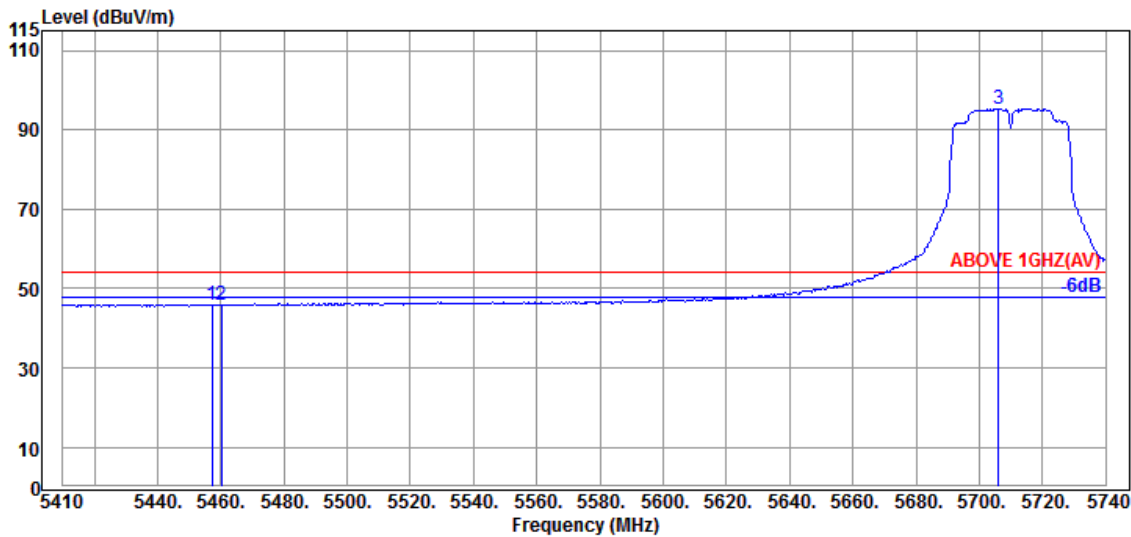


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.190 | 34.60 | 9.05 | 34.21 | 36.60 | 46.04 | 54.00 | 7.96 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.35 | 45.79 | 54.00 | 8.21 | Average |
| @ 5706.010 | 34.80 | 9.19 | 34.29 | 85.69 | 95.39 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

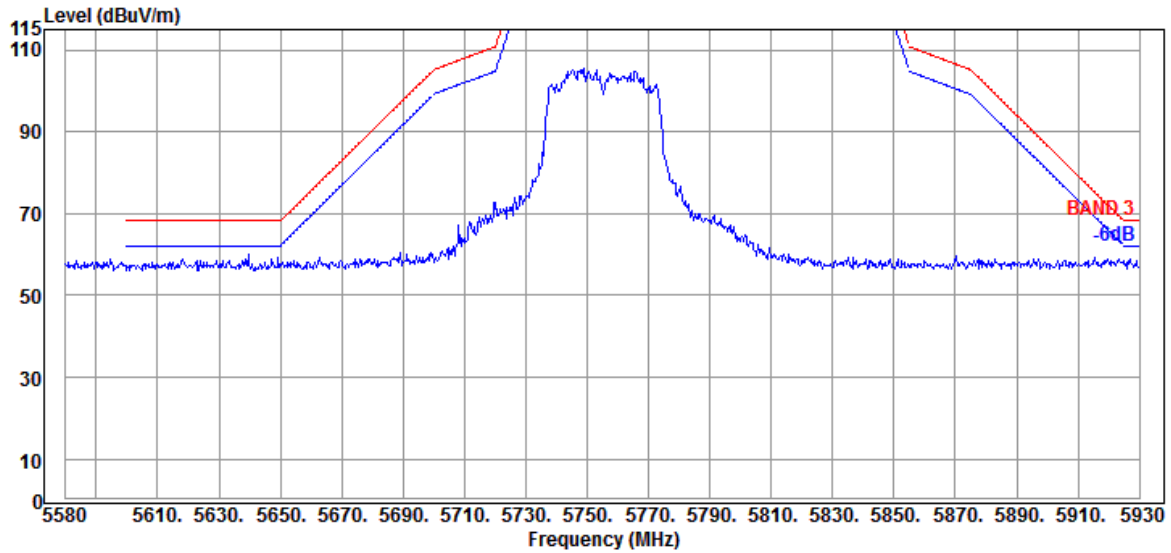


Antenna at Vertical Polarization

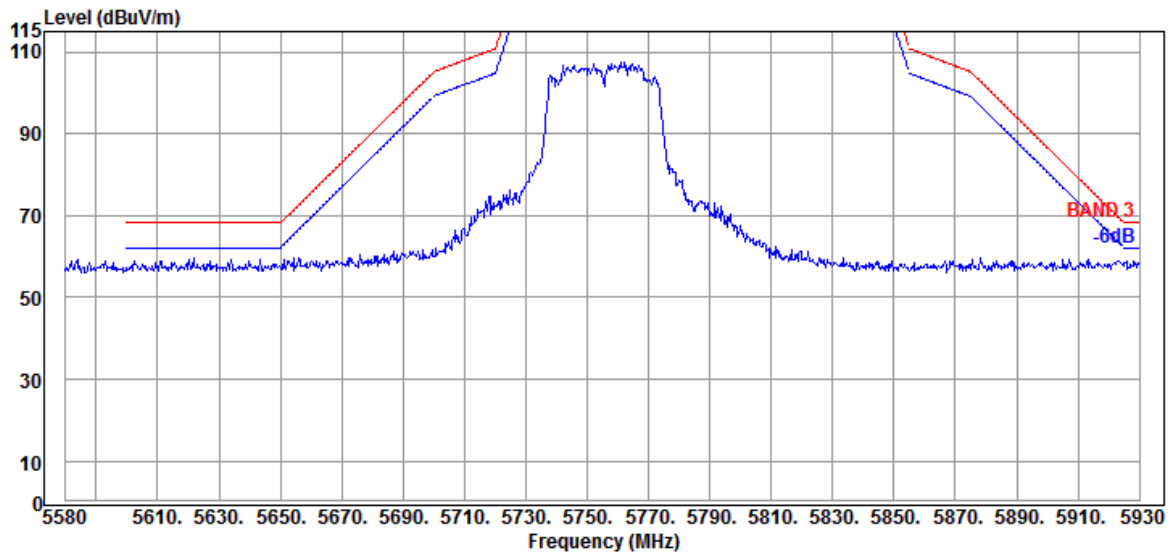


| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3 |
| | | Frequency | TX 5795MHz |


Antenna at Horizontal Polarization

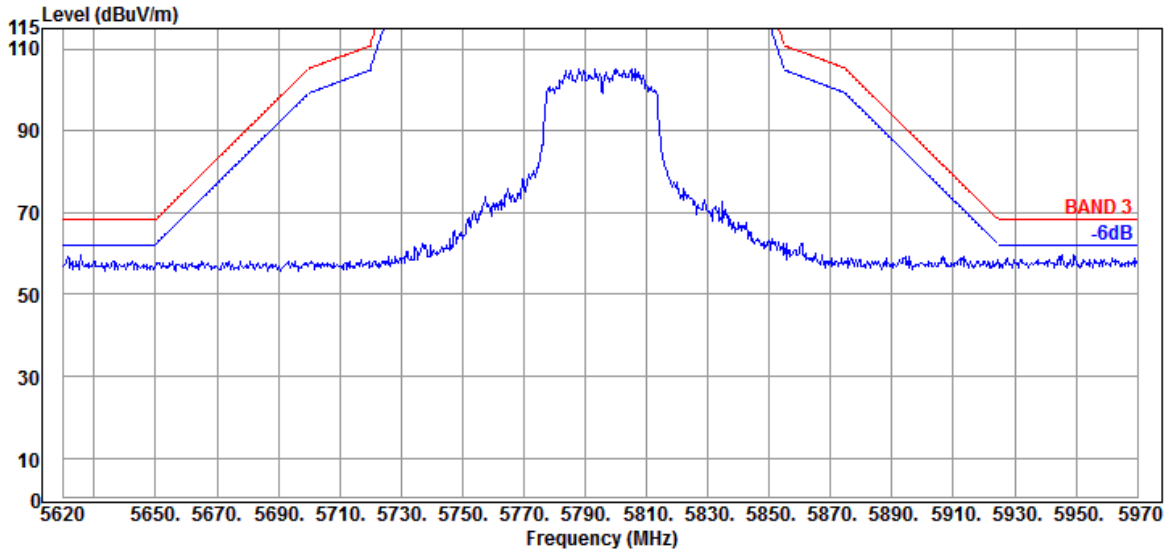

Antenna at Vertical Polarization

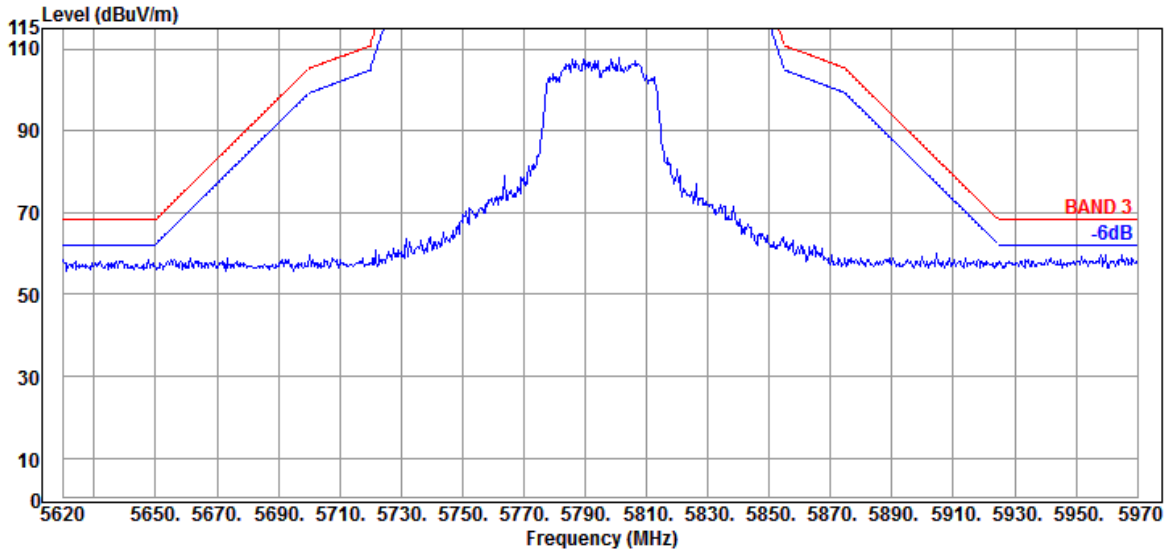


| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | I |
| | | Frequency | TX 5210MHz |

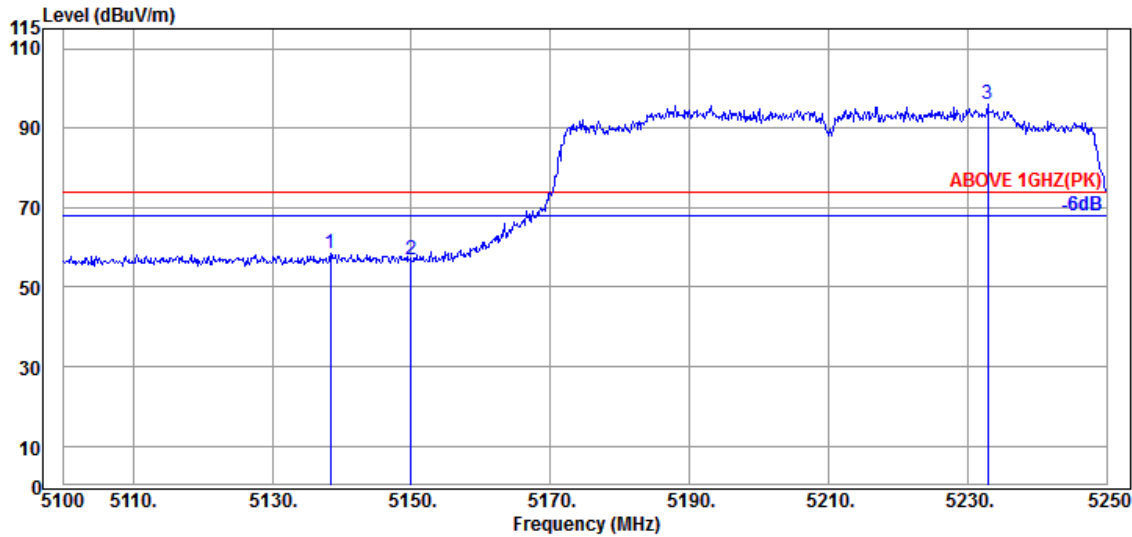

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5138.400 | 34.40 | 8.88 | 34.34 | 49.35 | 58.29 | 74.00 | 15.71 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 47.96 | 57.00 | 74.00 | 17.00 | Peak |
| @ 5232.900 | 34.55 | 8.93 | 34.30 | 86.81 | 95.99 | --- | --- | Peak |

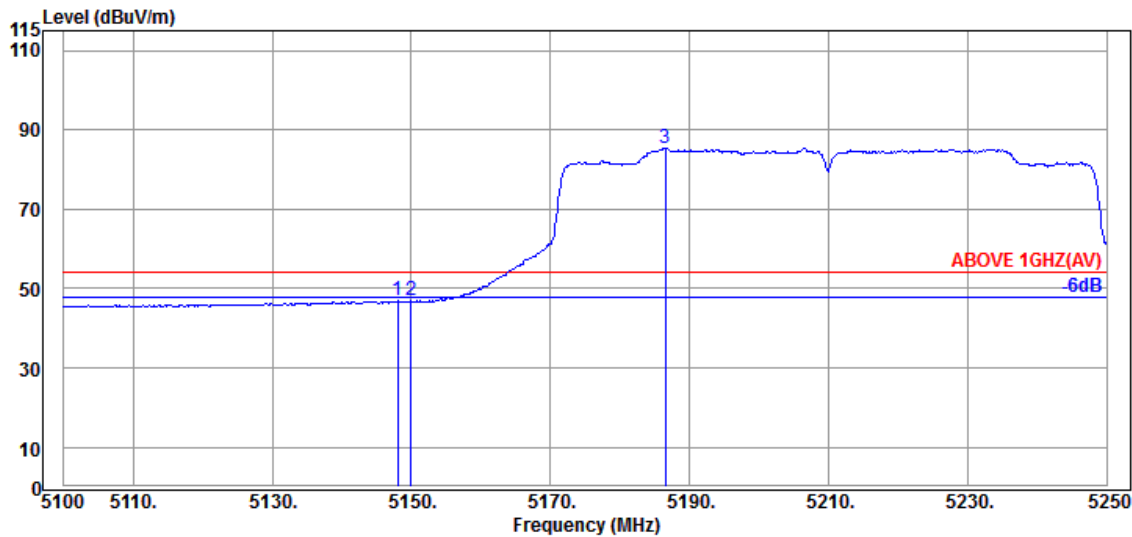


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.000 | 34.50 | 8.88 | 34.34 | 37.81 | 46.85 | 54.00 | 7.15 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 37.82 | 46.86 | 54.00 | 7.14 | Average |
| @ 5186.550 | 34.70 | 8.91 | 34.32 | 76.19 | 85.48 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | I |
| | | Frequency | TX 5210MHz |

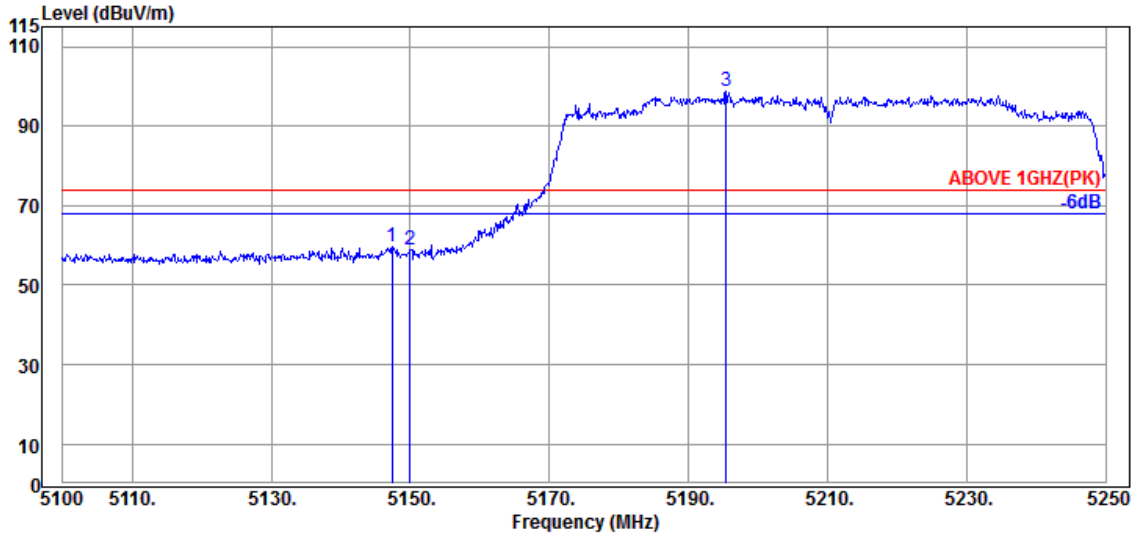

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.400 | 34.50 | 8.88 | 34.34 | 50.82 | 59.86 | 74.00 | 14.14 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 49.86 | 58.90 | 74.00 | 15.10 | Peak |
| @ 5195.400 | 34.70 | 8.91 | 34.32 | 89.38 | 98.67 | --- | --- | Peak |

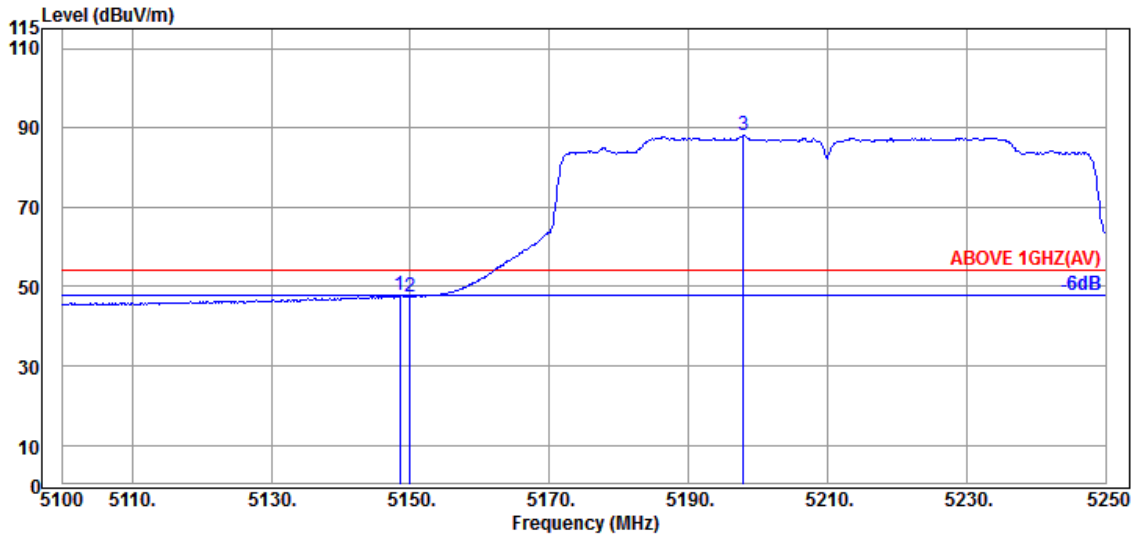


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.450 | 34.50 | 8.88 | 34.34 | 38.68 | 47.72 | 54.00 | 6.28 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 38.40 | 47.44 | 54.00 | 6.56 | Average |
| @ 5197.950 | 34.70 | 8.91 | 34.32 | 78.93 | 88.22 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

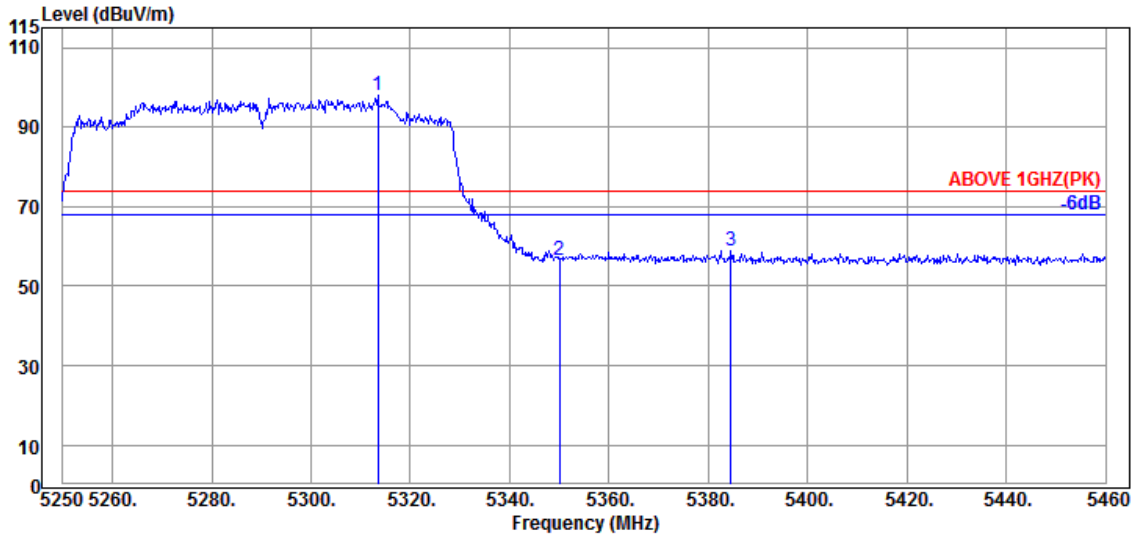

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5313.420 | 34.57 | 8.98 | 34.27 | 88.88 | 98.16 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 46.99 | 56.62 | 74.00 | 17.38 | Peak |
| 5384.610 | 34.83 | 9.01 | 34.24 | 49.27 | 58.87 | 74.00 | 15.13 | Peak |

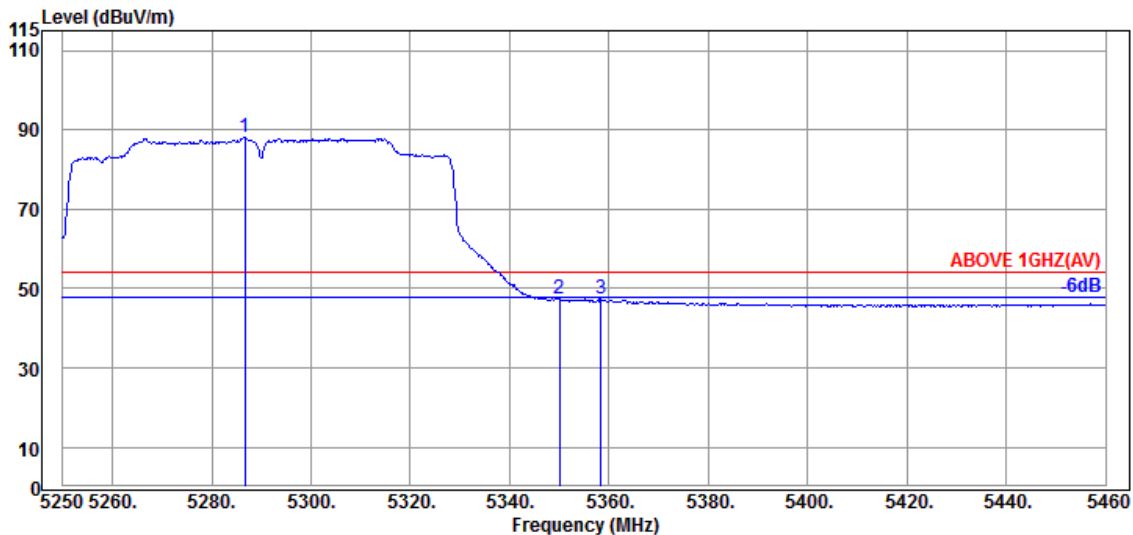


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5286.750 | 34.43 | 8.96 | 34.28 | 78.97 | 88.08 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 37.67 | 47.30 | 54.00 | 6.70 | Average |
| 5358.360 | 34.87 | 9.00 | 34.26 | 37.70 | 47.31 | 54.00 | 6.69 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

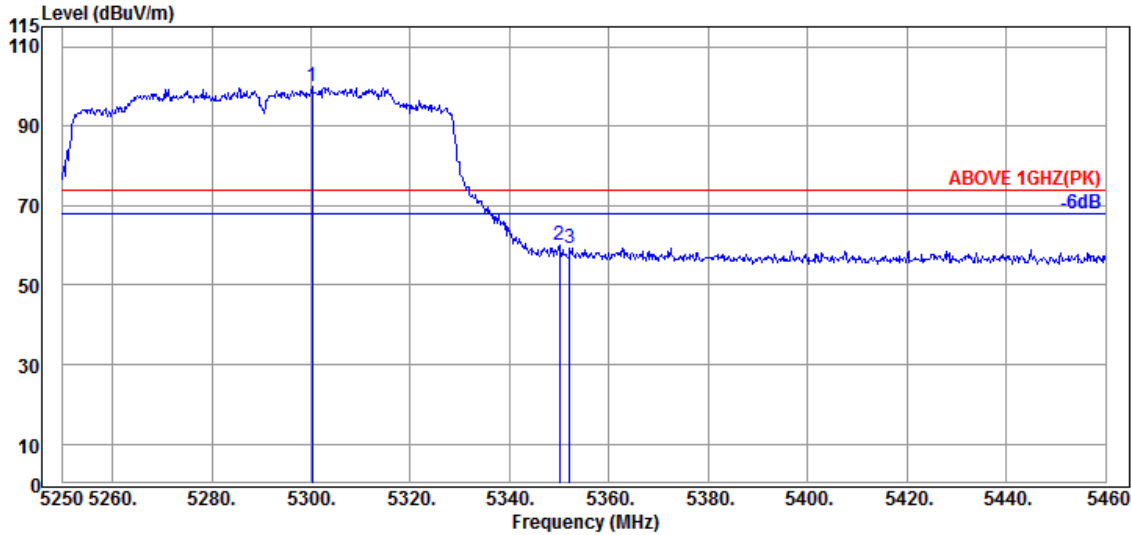

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5300.190 | 34.40 | 8.97 | 34.28 | 90.70 | 99.79 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 50.42 | 60.05 | 74.00 | 13.95 | Peak |
| 5352.060 | 34.90 | 8.99 | 34.26 | 49.71 | 59.34 | 74.00 | 14.66 | Peak |

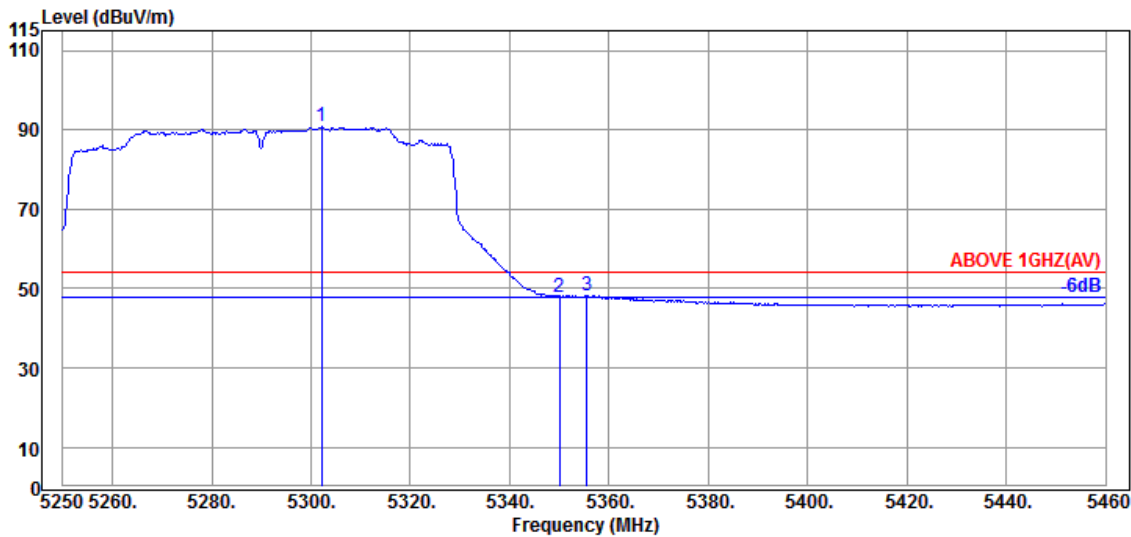


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.080 | 34.40 | 8.97 | 34.28 | 81.73 | 90.82 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 38.30 | 47.93 | 54.00 | 6.07 | Average |
| 5355.630 | 34.87 | 9.00 | 34.26 | 38.67 | 48.28 | 54.00 | 5.72 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5530MHz |

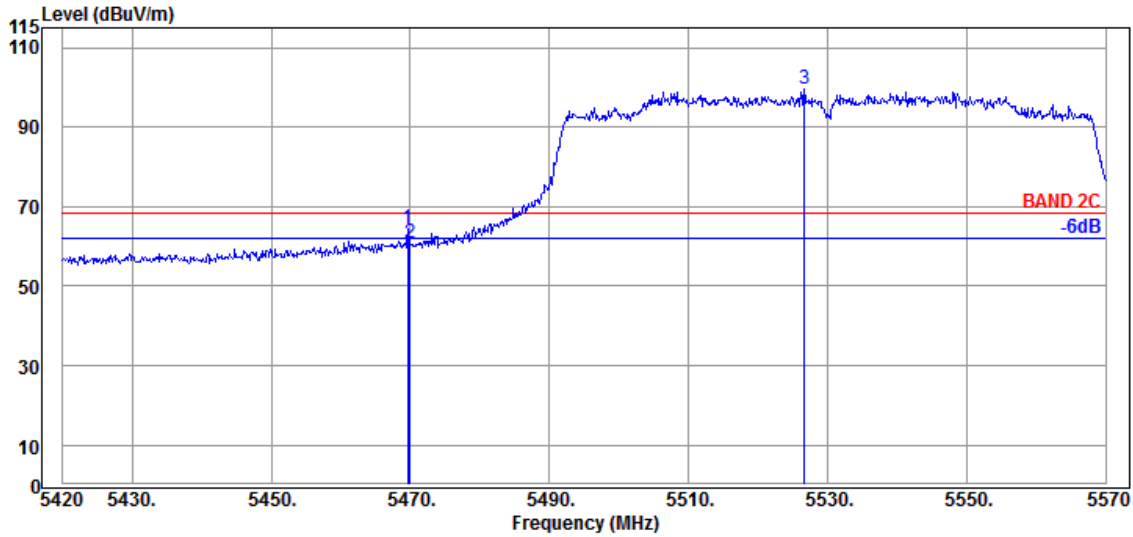

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.650 | 34.63 | 9.06 | 34.21 | 54.88 | 64.36 | 68.20 | 3.84 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 51.34 | 60.82 | 68.20 | 7.38 | Peak |
| @ 5526.650 | 34.70 | 9.09 | 34.22 | 90.10 | 99.67 | --- | --- | Peak |

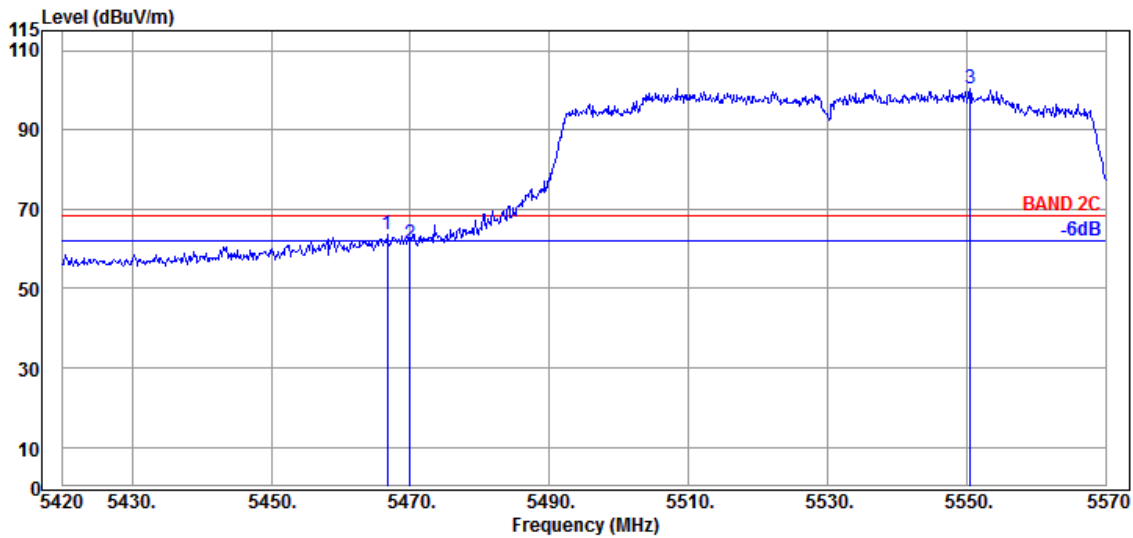


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.650 | 34.63 | 9.06 | 34.21 | 53.99 | 63.47 | 68.20 | 4.73 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 51.94 | 61.42 | 68.20 | 6.78 | Peak |
| @ 5550.500 | 34.70 | 9.10 | 34.23 | 90.75 | 100.32 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5530MHz |

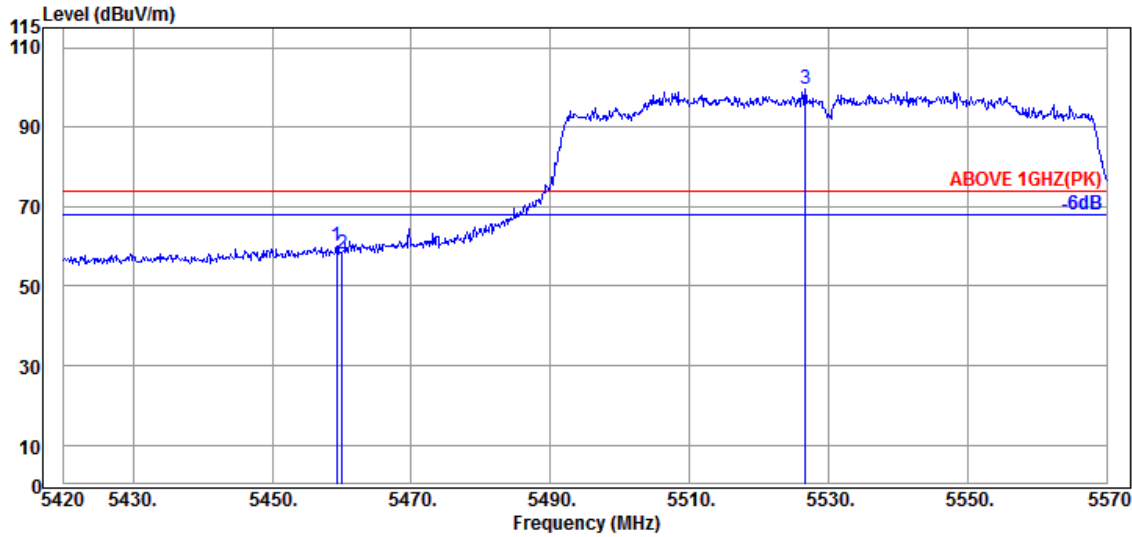

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.300 | 34.60 | 9.05 | 34.21 | 50.50 | 59.94 | 74.00 | 14.06 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 48.76 | 58.20 | 74.00 | 15.80 | Peak |
| @ 5526.650 | 34.70 | 9.09 | 34.22 | 90.10 | 99.67 | --- | --- | Peak |

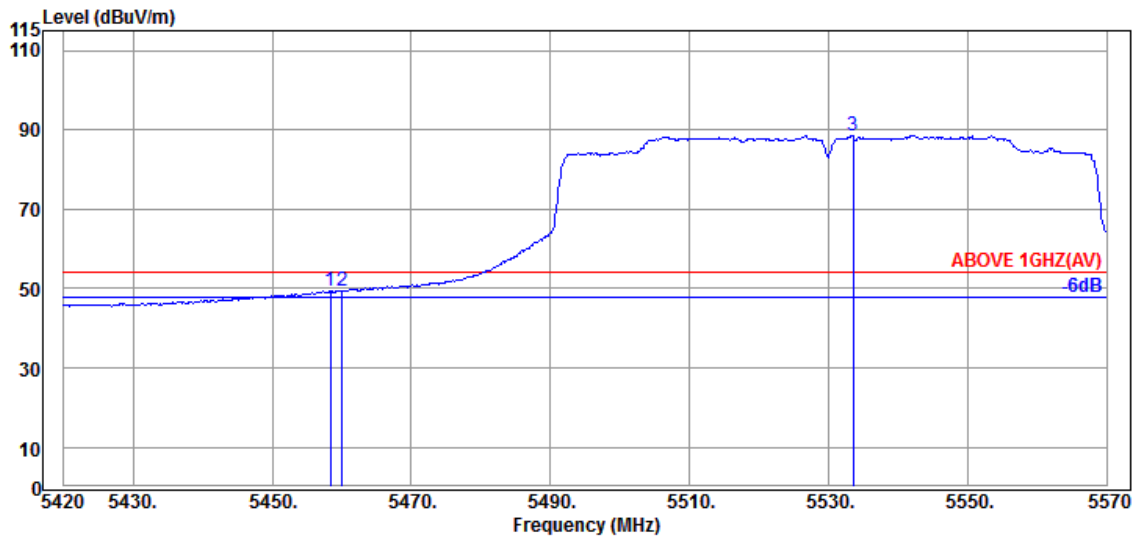


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.400 | 34.60 | 9.05 | 34.21 | 39.93 | 49.37 | 54.00 | 4.63 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 40.05 | 49.49 | 54.00 | 4.51 | Average |
| @ 5533.550 | 34.70 | 9.09 | 34.22 | 79.12 | 88.69 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5530MHz |

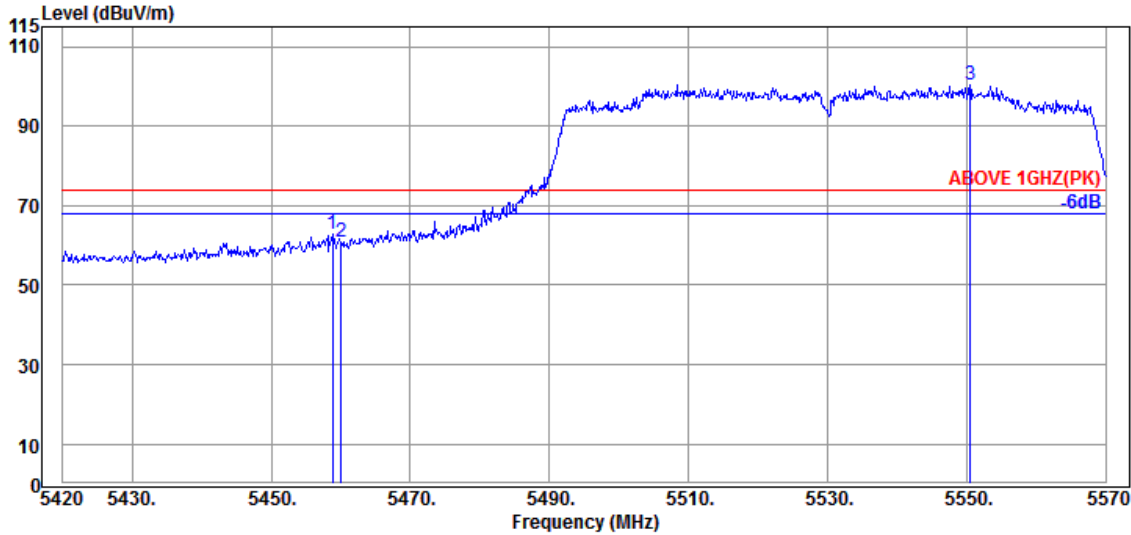

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.850 | 34.60 | 9.05 | 34.21 | 53.22 | 62.66 | 74.00 | 11.34 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 51.42 | 60.86 | 74.00 | 13.14 | Peak |
| @ 5550.500 | 34.70 | 9.10 | 34.23 | 90.75 | 100.32 | --- | --- | Peak |

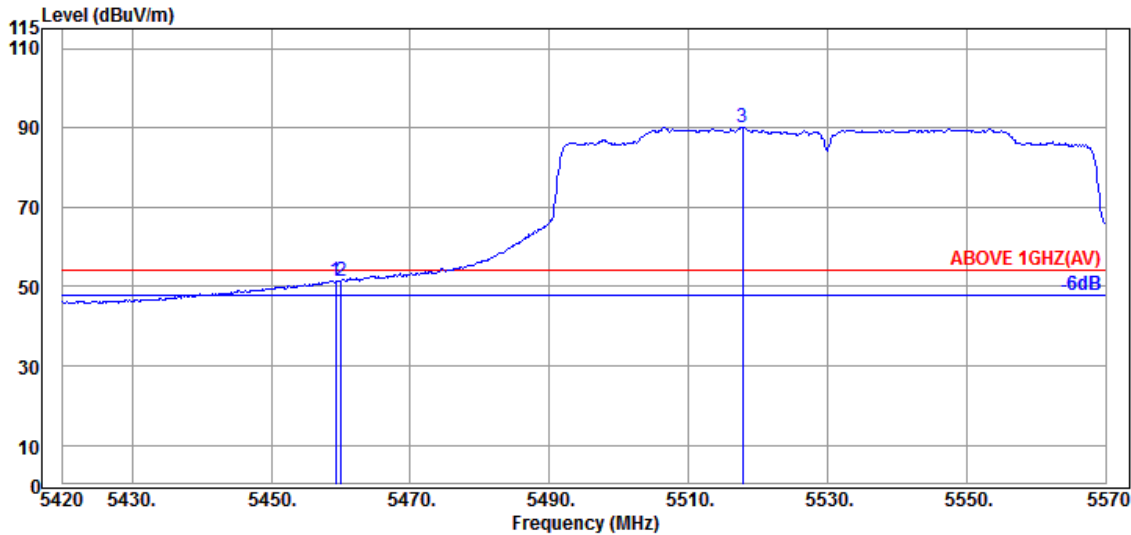


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.300 | 34.60 | 9.05 | 34.21 | 42.12 | 51.56 | 54.00 | 2.44 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 41.88 | 51.32 | 54.00 | 2.68 | Average |
| @ 5517.800 | 34.70 | 9.09 | 34.21 | 80.59 | 90.17 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

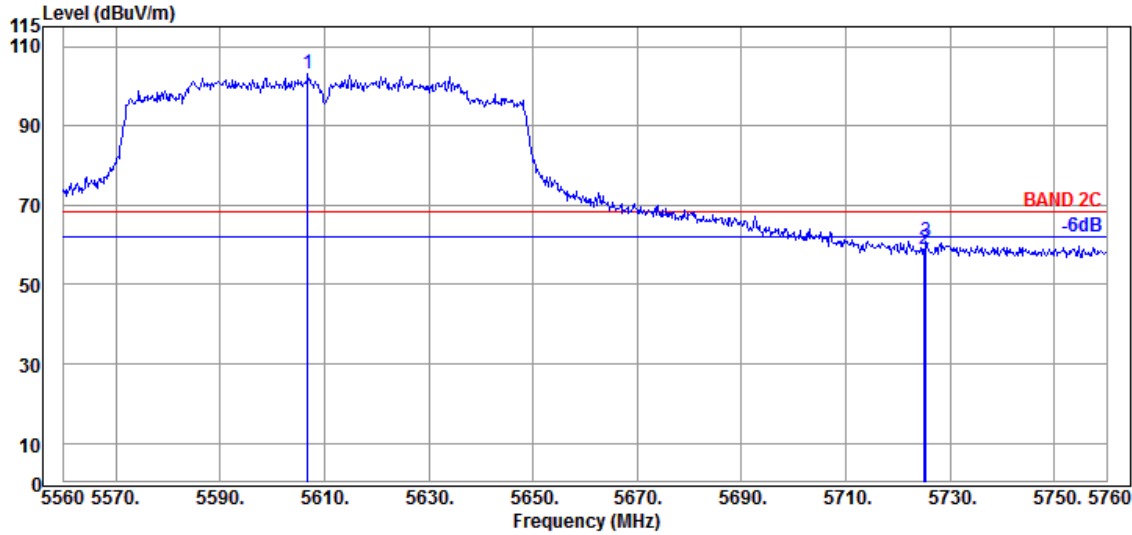

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5606.800 | 34.40 | 9.13 | 34.25 | 93.89 | 103.17 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 49.08 | 58.88 | 68.20 | 9.32 | Peak |
| 5725.400 | 34.90 | 9.20 | 34.30 | 50.99 | 60.79 | 68.20 | 7.41 | Peak |

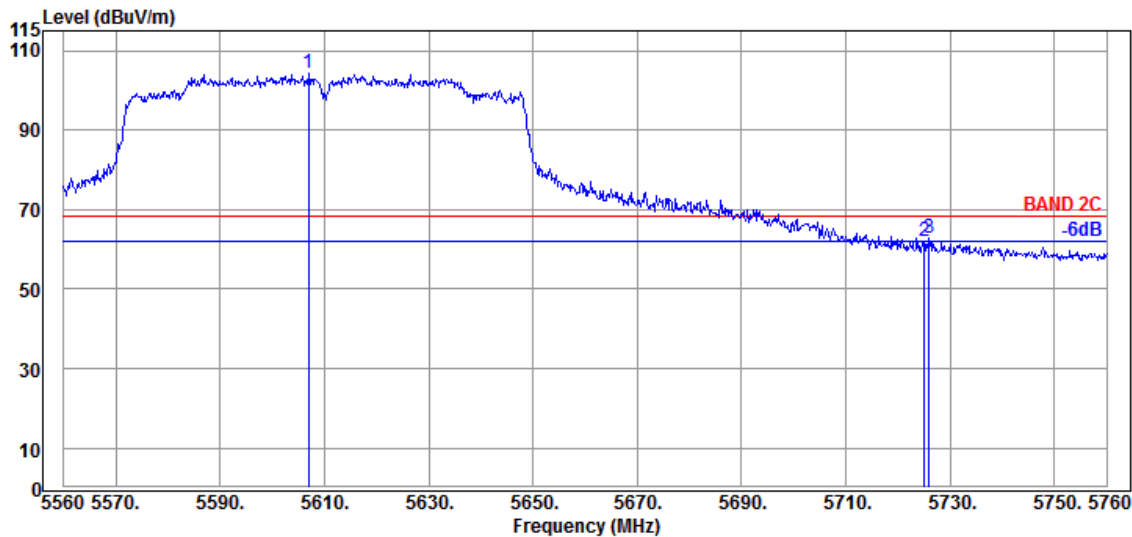


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5607.000 | 34.40 | 9.13 | 34.25 | 94.92 | 104.20 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 52.12 | 61.92 | 68.20 | 6.28 | Peak |
| 5726.000 | 34.90 | 9.20 | 34.30 | 52.85 | 62.65 | 68.20 | 5.55 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

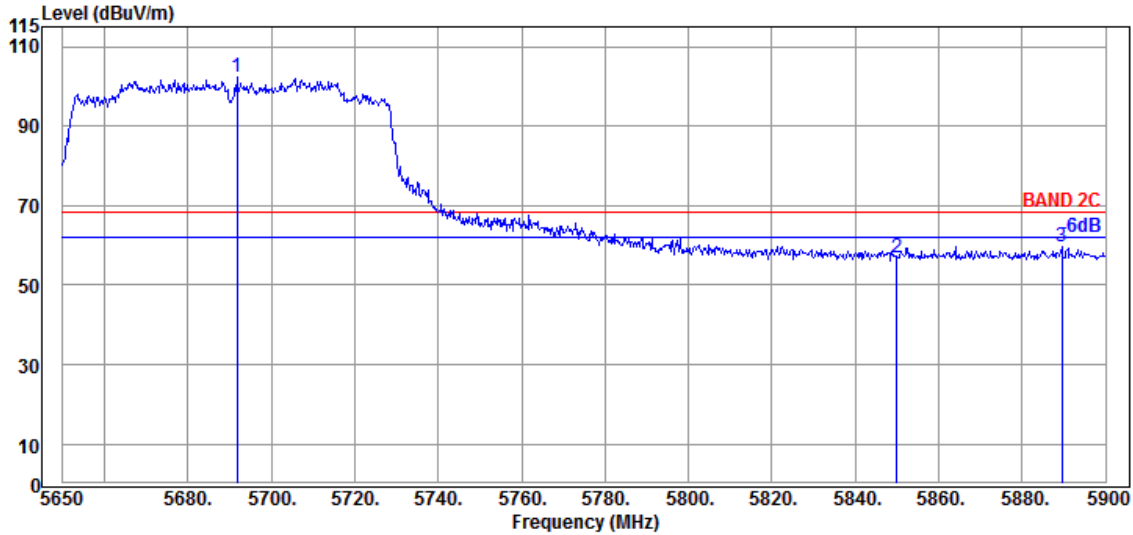

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5691.750 | 34.70 | 9.18 | 34.29 | 92.71 | 102.30 | --- | --- | Peak |
| 5850.000 | 35.40 | 9.25 | 34.36 | 46.76 | 57.05 | 68.20 | 11.15 | Peak |
| 5889.500 | 35.67 | 9.27 | 34.38 | 49.00 | 59.56 | 68.20 | 8.64 | Peak |

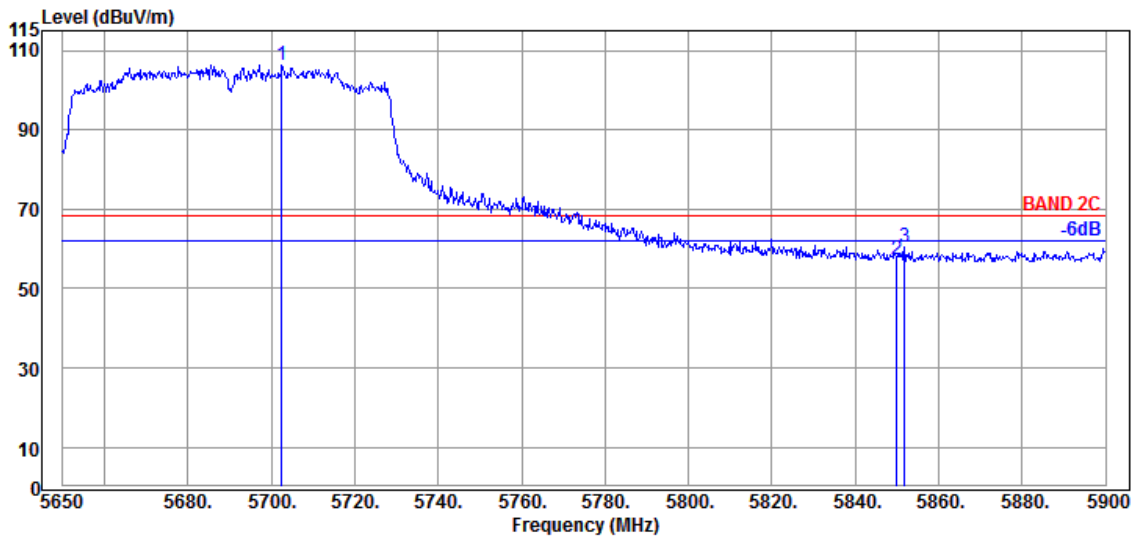


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5702.500 | 34.70 | 9.18 | 34.29 | 96.71 | 106.30 | --- | --- | Peak |
| 5850.000 | 35.40 | 9.25 | 34.36 | 47.14 | 57.43 | 68.20 | 10.77 | Peak |
| 5851.750 | 35.40 | 9.25 | 34.36 | 50.08 | 60.37 | 68.20 | 7.83 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

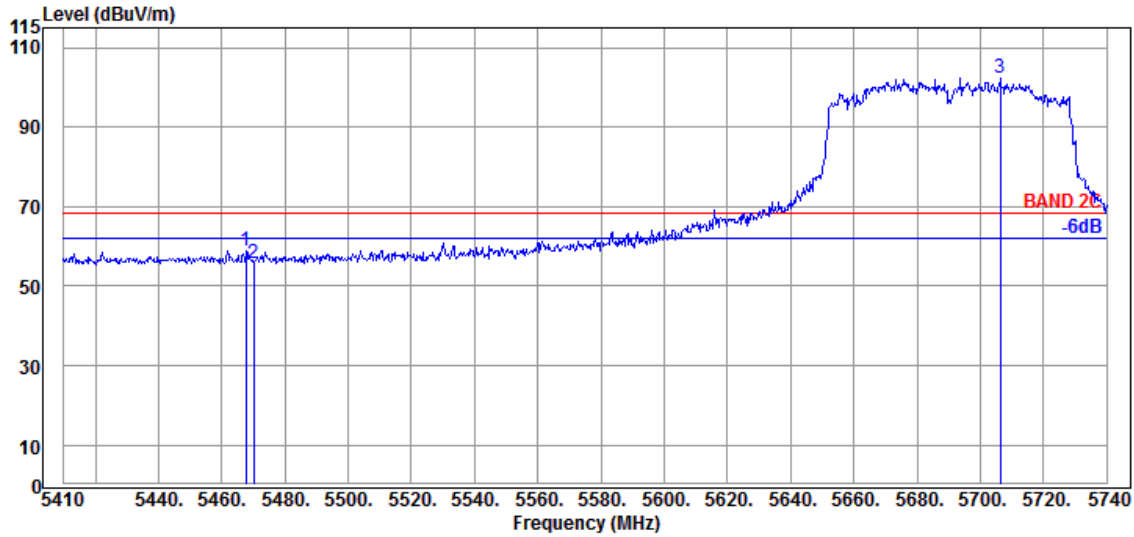

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.750 | 34.63 | 9.06 | 34.21 | 49.48 | 58.96 | 68.20 | 9.24 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 46.35 | 55.83 | 68.20 | 12.37 | Peak |
| @ 5706.340 | 34.80 | 9.19 | 34.29 | 92.76 | 102.46 | --- | --- | Peak |

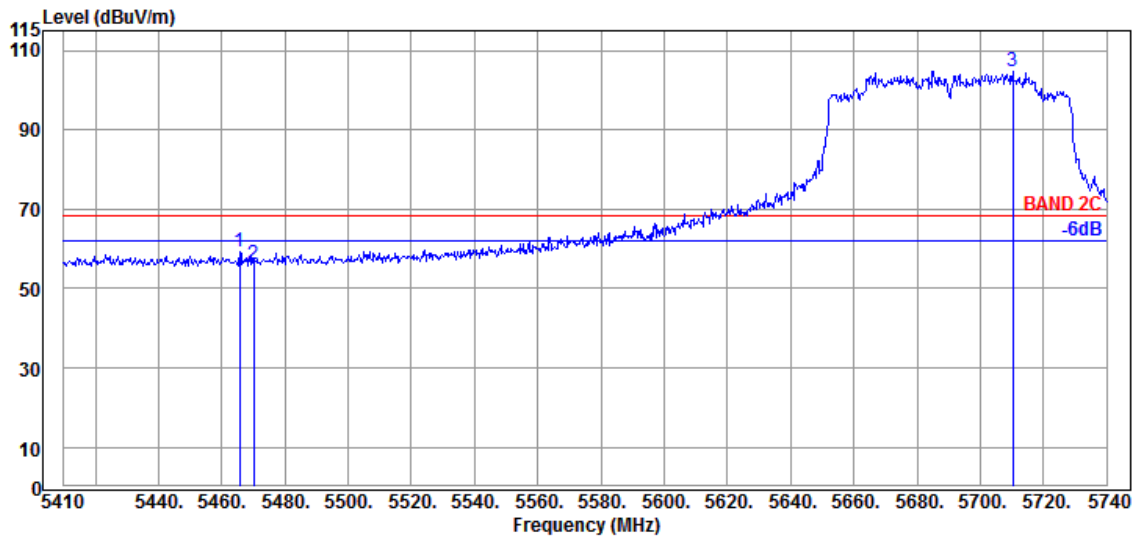


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.770 | 34.63 | 9.06 | 34.21 | 49.73 | 59.21 | 68.20 | 8.99 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 46.70 | 56.18 | 68.20 | 12.02 | Peak |
| @ 5710.300 | 34.80 | 9.19 | 34.30 | 95.03 | 104.72 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

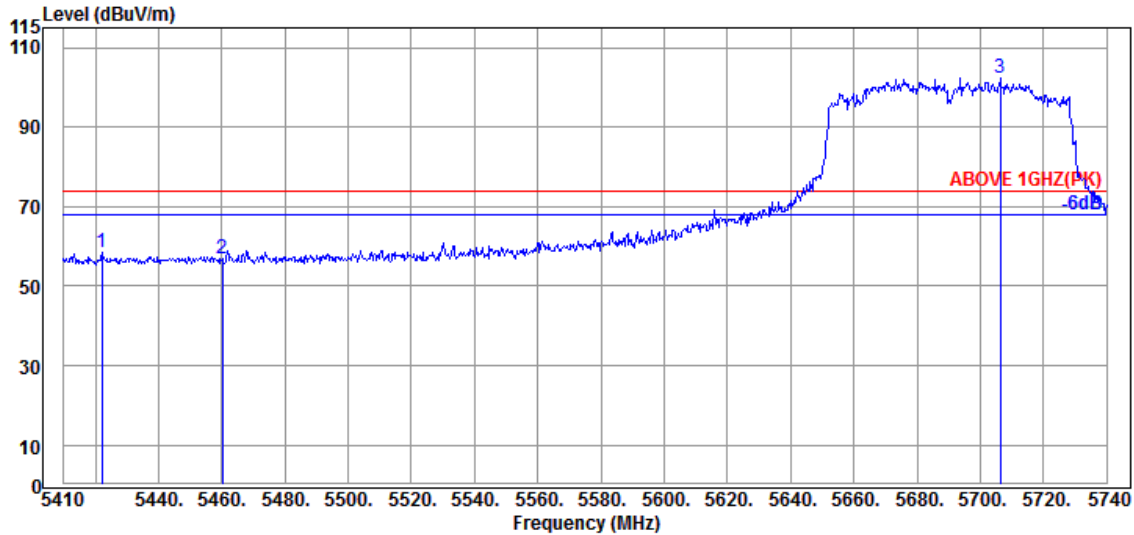

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5422.210 | 34.70 | 9.04 | 34.23 | 48.89 | 58.40 | 74.00 | 15.60 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 47.56 | 57.00 | 74.00 | 17.00 | Peak |
| @ 5706.340 | 34.80 | 9.19 | 34.29 | 92.76 | 102.46 | --- | --- | Peak |

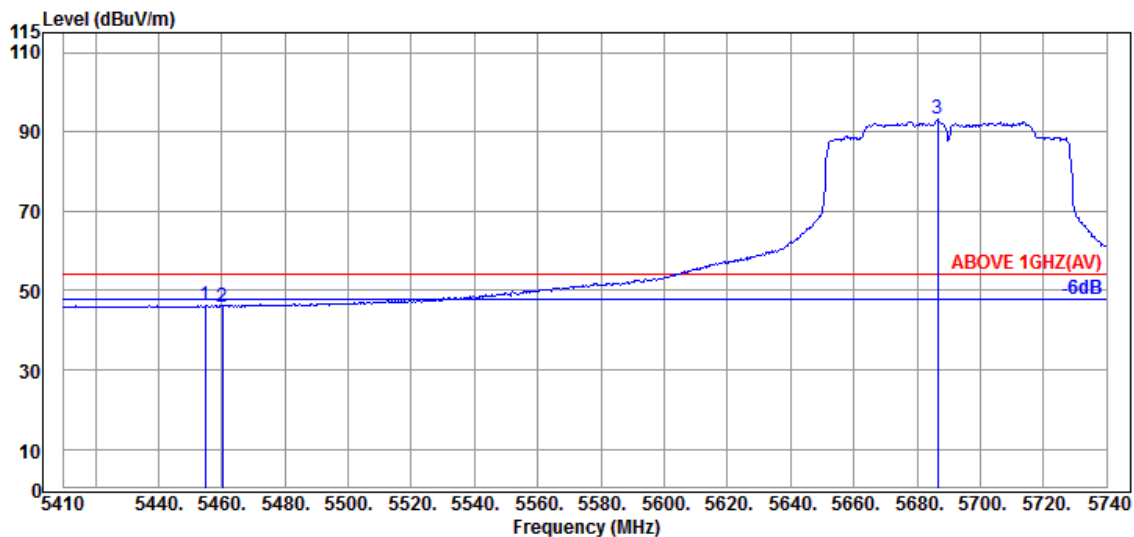


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5454.880 | 34.60 | 9.05 | 34.21 | 36.67 | 46.11 | 54.00 | 7.89 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.60 | 46.04 | 54.00 | 7.96 | Average |
| @ 5686.540 | 34.63 | 9.17 | 34.29 | 83.65 | 93.16 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

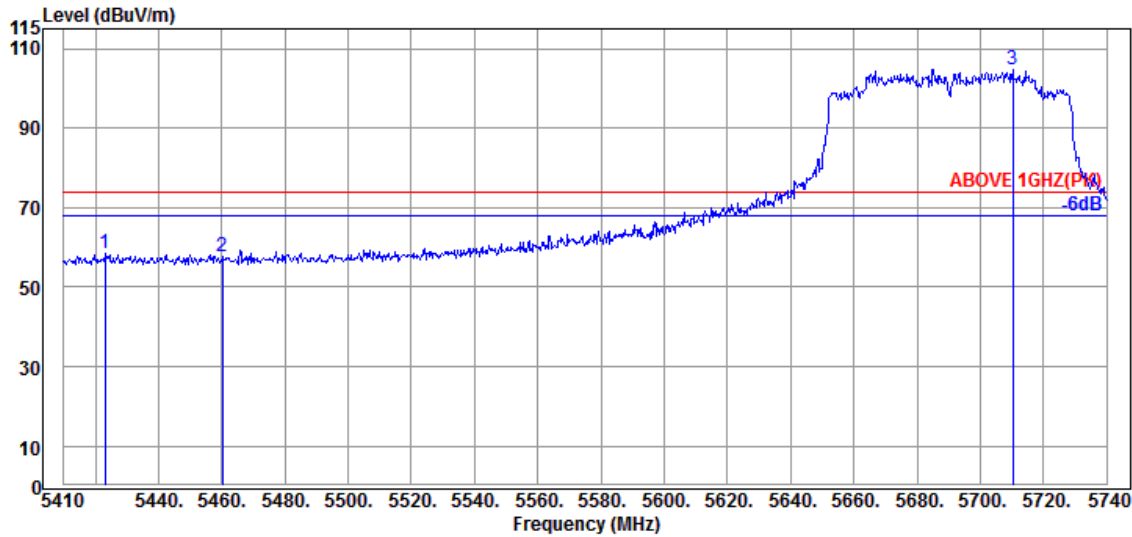

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5423.200 | 34.70 | 9.04 | 34.23 | 48.80 | 58.31 | 74.00 | 15.69 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 48.21 | 57.65 | 74.00 | 16.35 | Peak |
| @ 5710.300 | 34.80 | 9.19 | 34.30 | 95.03 | 104.72 | --- | --- | Peak |

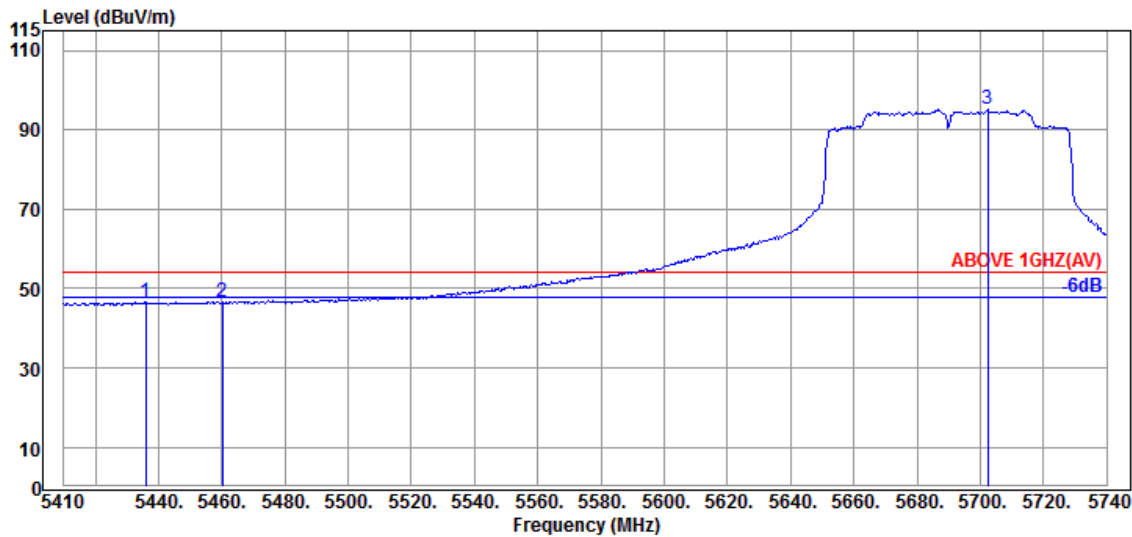


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5436.070 | 34.65 | 9.04 | 34.22 | 37.33 | 46.80 | 54.00 | 7.20 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 37.07 | 46.51 | 54.00 | 7.49 | Average |
| @ 5702.380 | 34.70 | 9.18 | 34.29 | 85.48 | 95.07 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |


Antenna at Horizontal Polarization

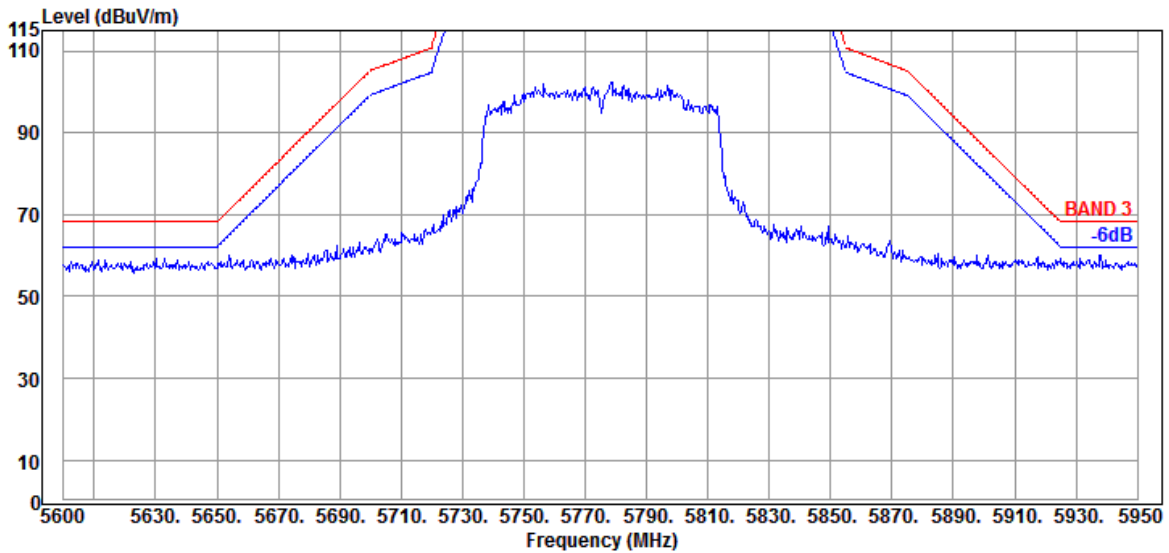

Antenna at Vertical Polarization

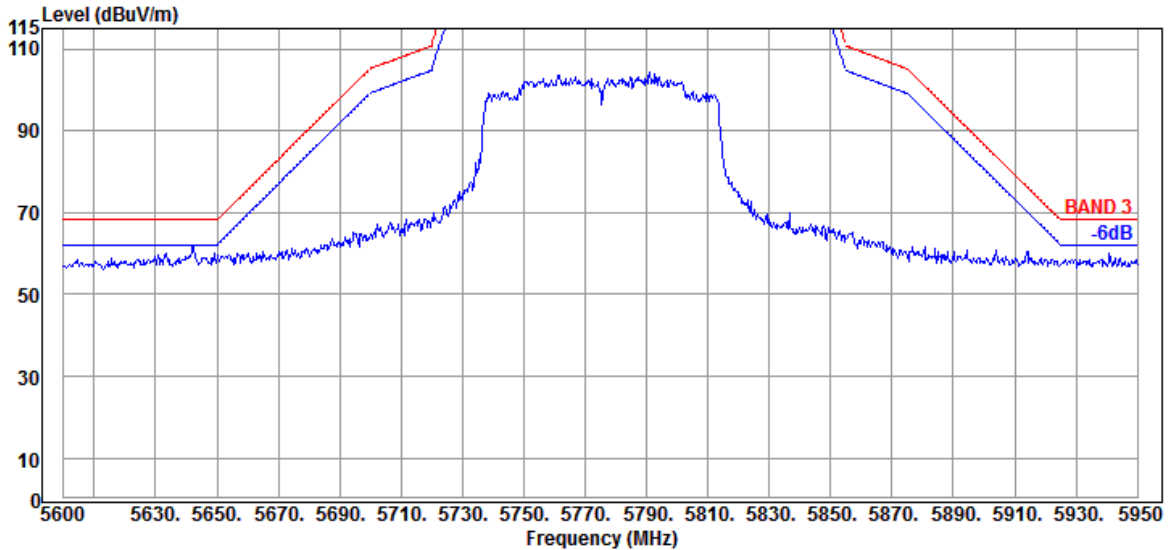


| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
| | | Frequency | TX 5250MHz |

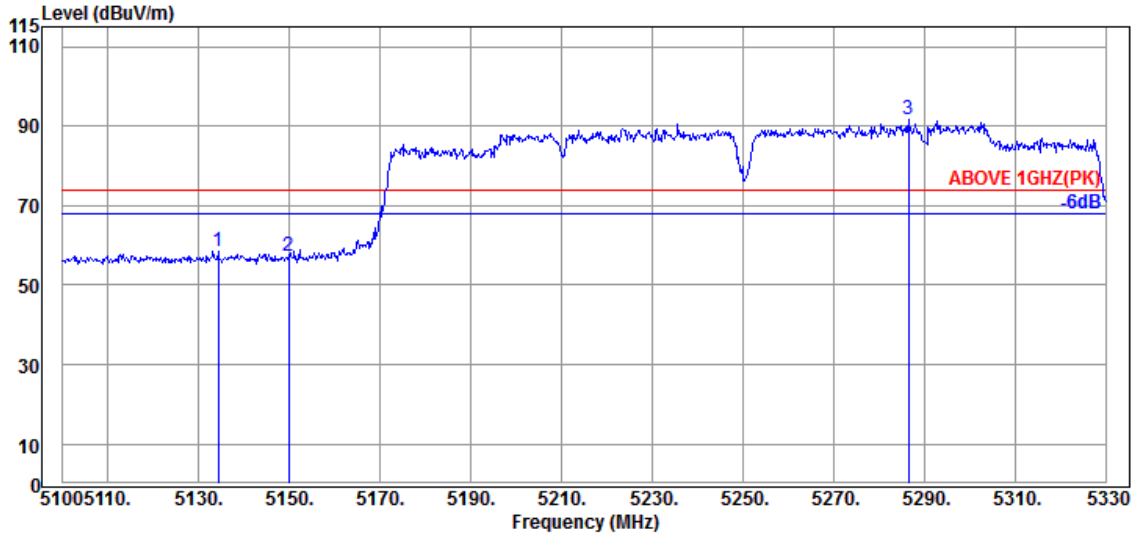

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5134.270 | 34.40 | 8.88 | 34.34 | 49.60 | 58.54 | 74.00 | 15.46 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 48.08 | 57.12 | 74.00 | 16.88 | Peak |
| @ 5286.530 | 34.43 | 8.96 | 34.28 | 82.51 | 91.62 | --- | --- | Peak |

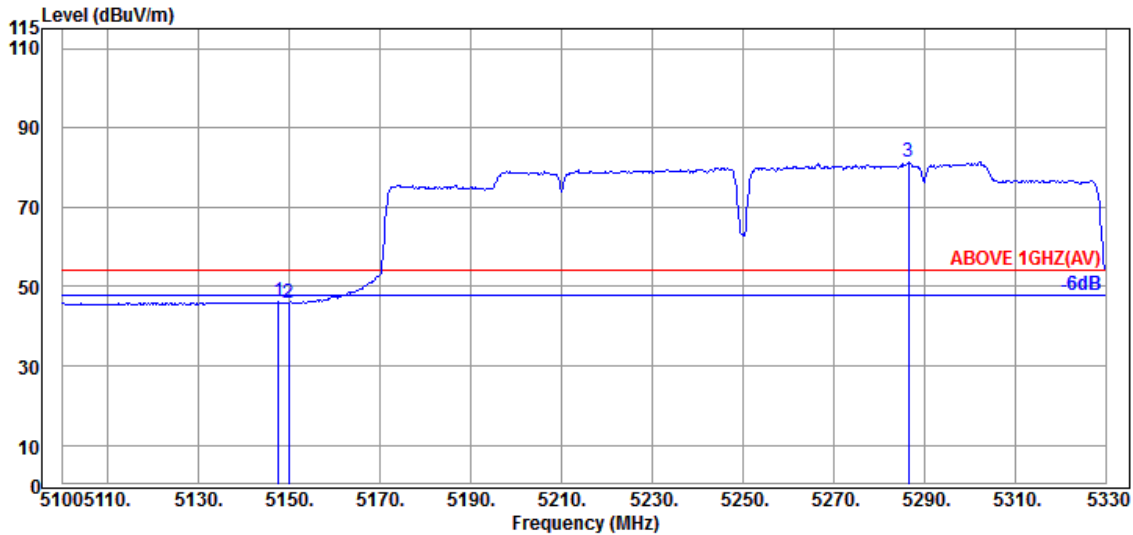


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.610 | 34.50 | 8.88 | 34.34 | 37.01 | 46.05 | 54.00 | 7.95 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 36.98 | 46.02 | 54.00 | 7.98 | Average |
| @ 5286.530 | 34.43 | 8.96 | 34.28 | 72.34 | 81.45 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
| | | Frequency | TX 5250MHz |

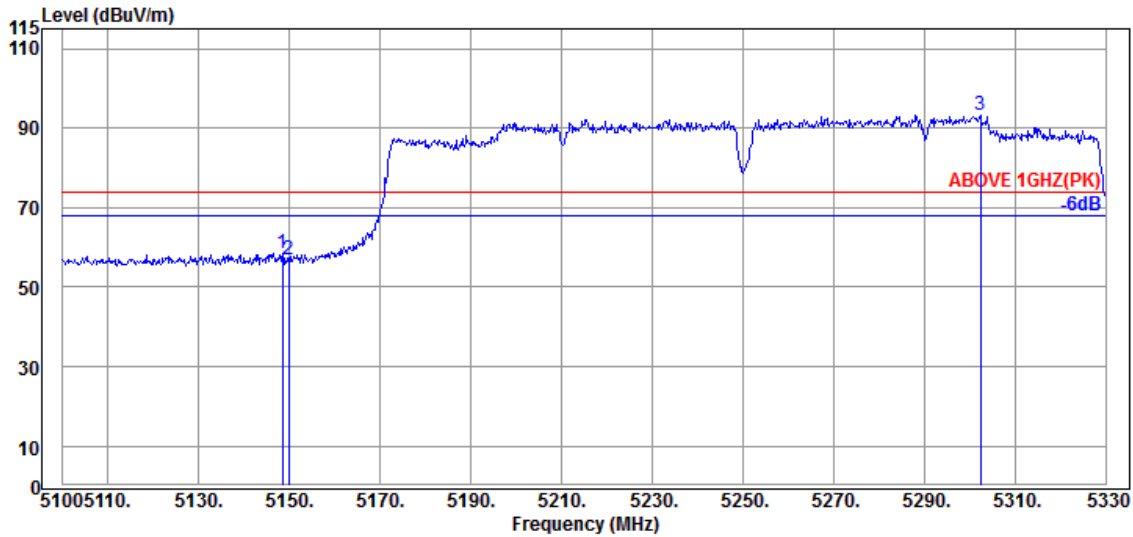

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.530 | 34.50 | 8.88 | 34.34 | 49.57 | 58.61 | 74.00 | 15.39 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 47.94 | 56.98 | 74.00 | 17.02 | Peak |
| @ 5302.400 | 34.40 | 8.97 | 34.28 | 84.03 | 93.12 | --- | --- | Peak |

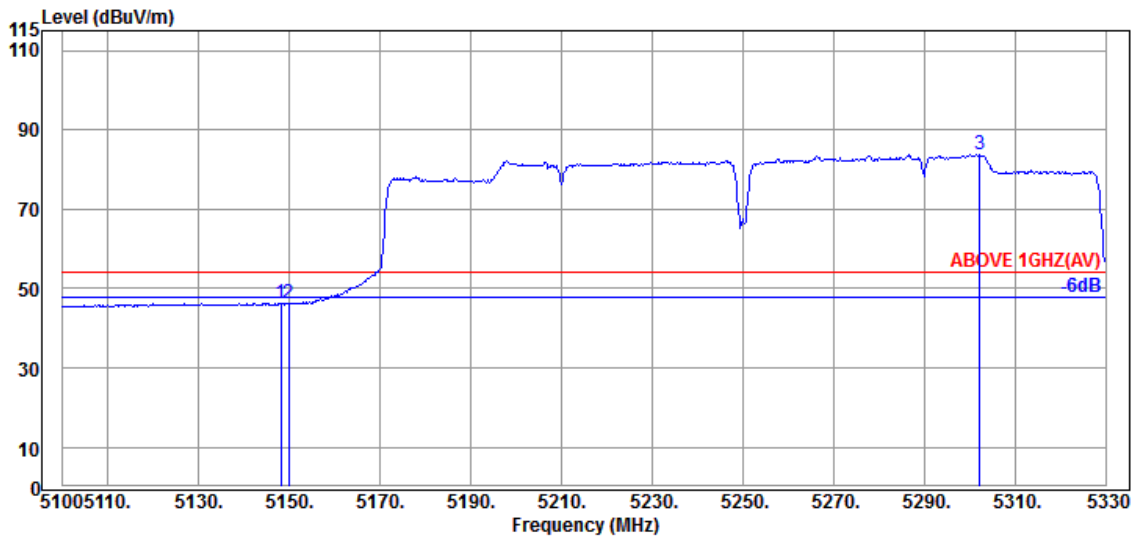


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.070 | 34.50 | 8.88 | 34.34 | 37.30 | 46.34 | 54.00 | 7.66 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 37.04 | 46.08 | 54.00 | 7.92 | Average |
| @ 5302.170 | 34.40 | 8.97 | 34.28 | 74.58 | 83.67 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
| | | Frequency | TX 5250MHz |

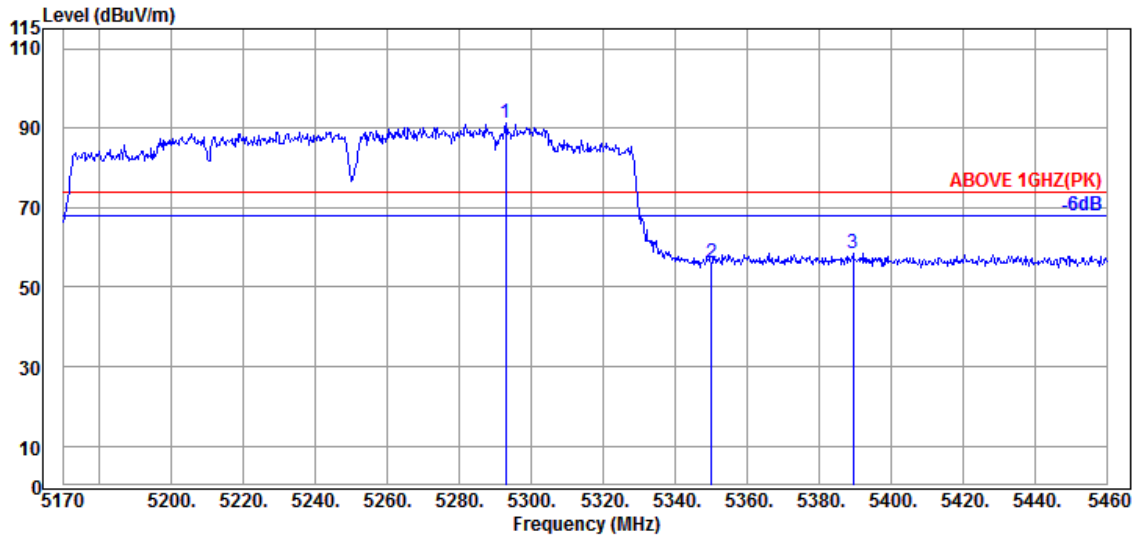

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5292.960 | 34.40 | 8.97 | 34.28 | 82.08 | 91.17 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 46.38 | 56.01 | 74.00 | 17.99 | Peak |
| 5389.530 | 34.80 | 9.02 | 34.24 | 49.07 | 58.65 | 74.00 | 15.35 | Peak |

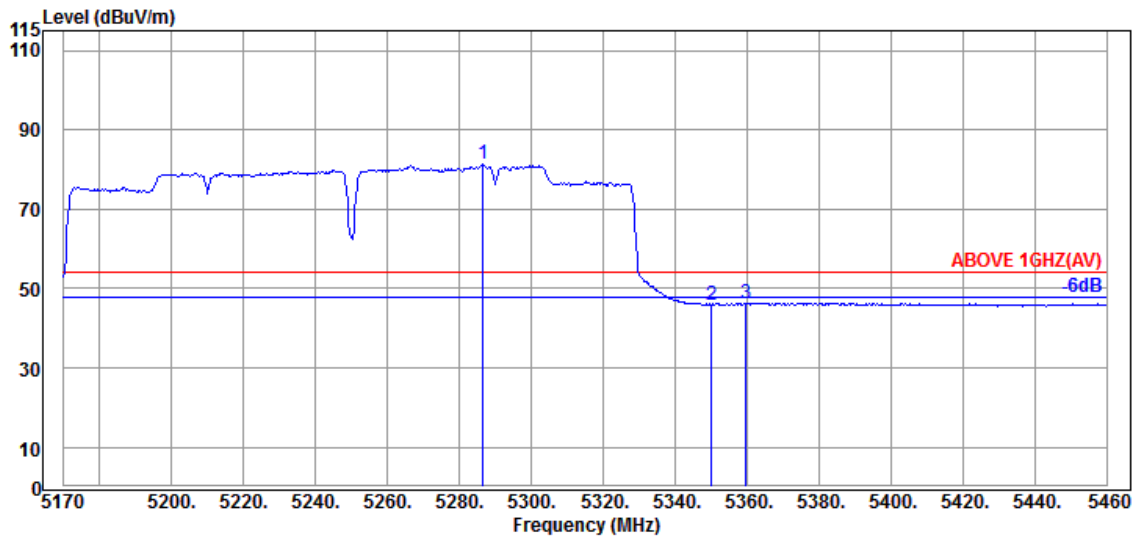


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5286.580 | 34.43 | 8.96 | 34.28 | 72.36 | 81.47 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 36.26 | 45.89 | 54.00 | 8.11 | Average |
| 5359.660 | 34.87 | 9.00 | 34.26 | 36.77 | 46.38 | 54.00 | 7.62 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
| | | Frequency | TX 5250MHz |

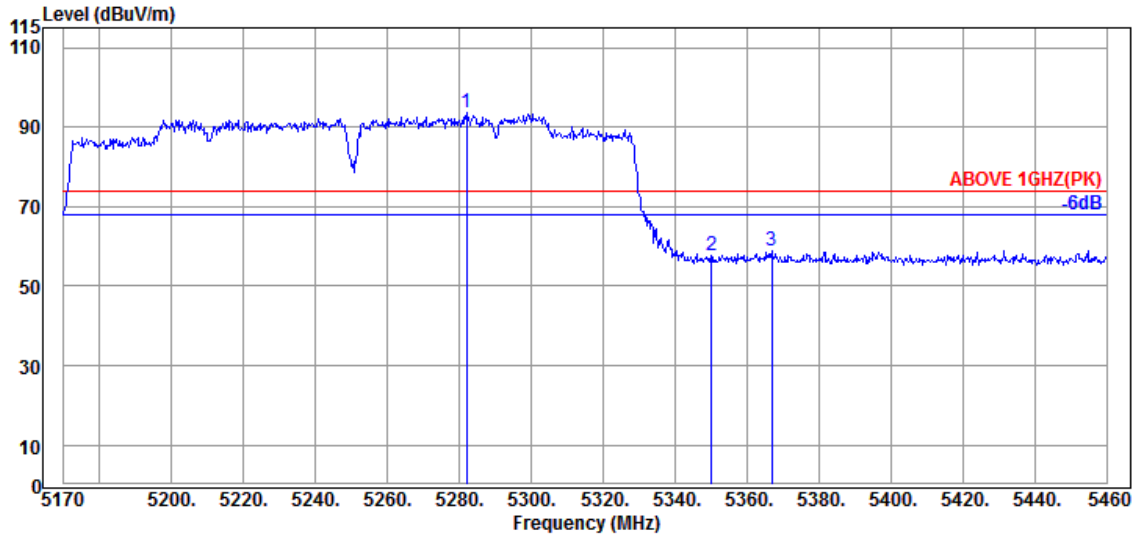

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5281.940 | 34.43 | 8.96 | 34.28 | 84.50 | 93.61 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 48.11 | 57.74 | 74.00 | 16.26 | Peak |
| 5366.910 | 34.87 | 9.00 | 34.25 | 49.16 | 58.78 | 74.00 | 15.22 | Peak |

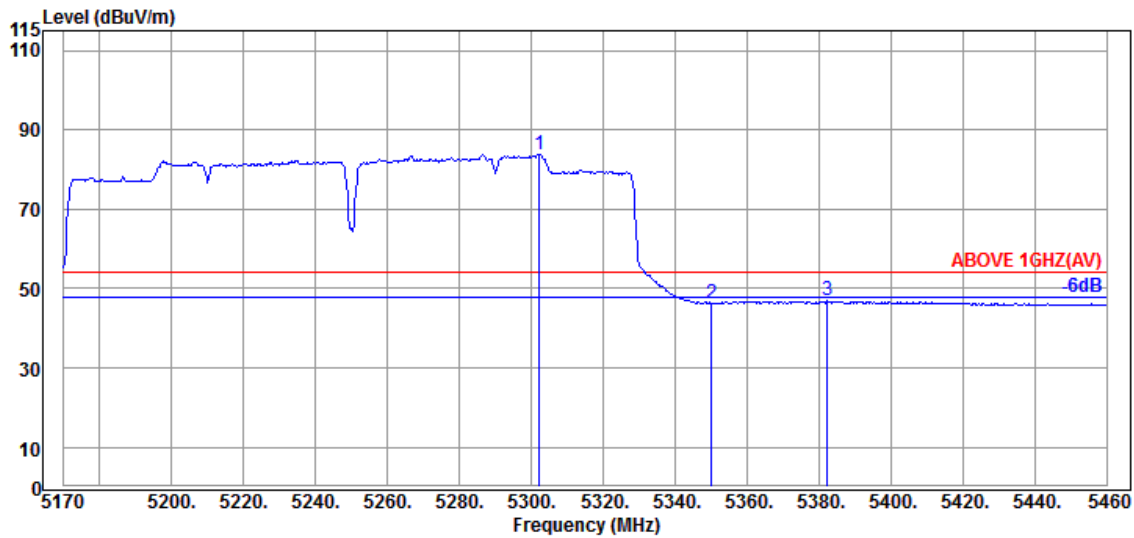


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.240 | 34.40 | 8.97 | 34.28 | 74.82 | 83.91 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 36.60 | 46.23 | 54.00 | 7.77 | Average |
| 5382.280 | 34.83 | 9.01 | 34.24 | 37.28 | 46.88 | 54.00 | 7.12 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

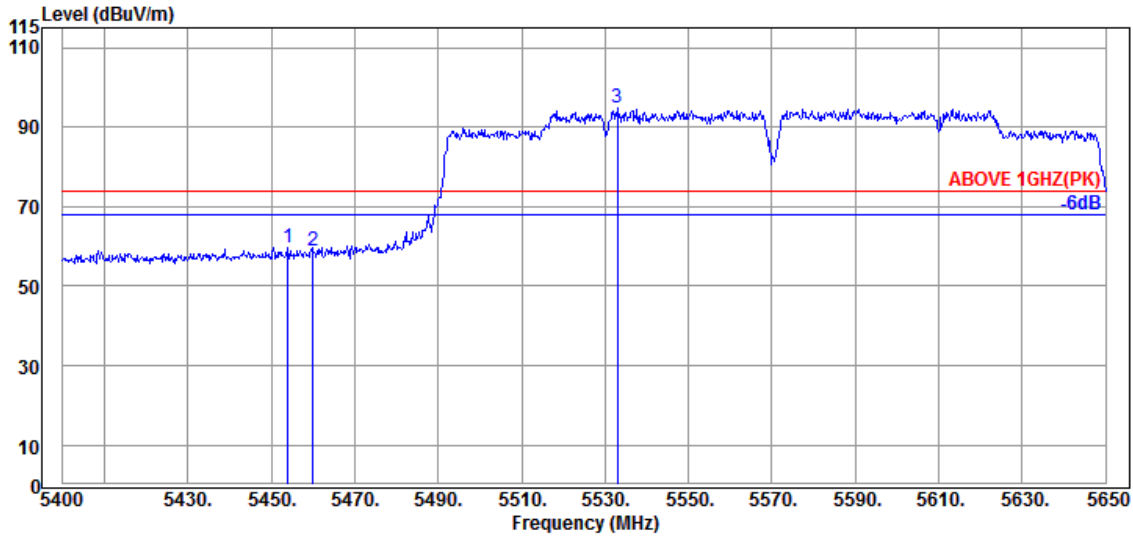

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5454.000 | 34.60 | 9.05 | 34.21 | 50.37 | 59.81 | 74.00 | 14.19 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 49.31 | 58.75 | 74.00 | 15.25 | Peak |
| @ 5533.000 | 34.70 | 9.09 | 34.22 | 85.26 | 94.83 | --- | --- | Peak |

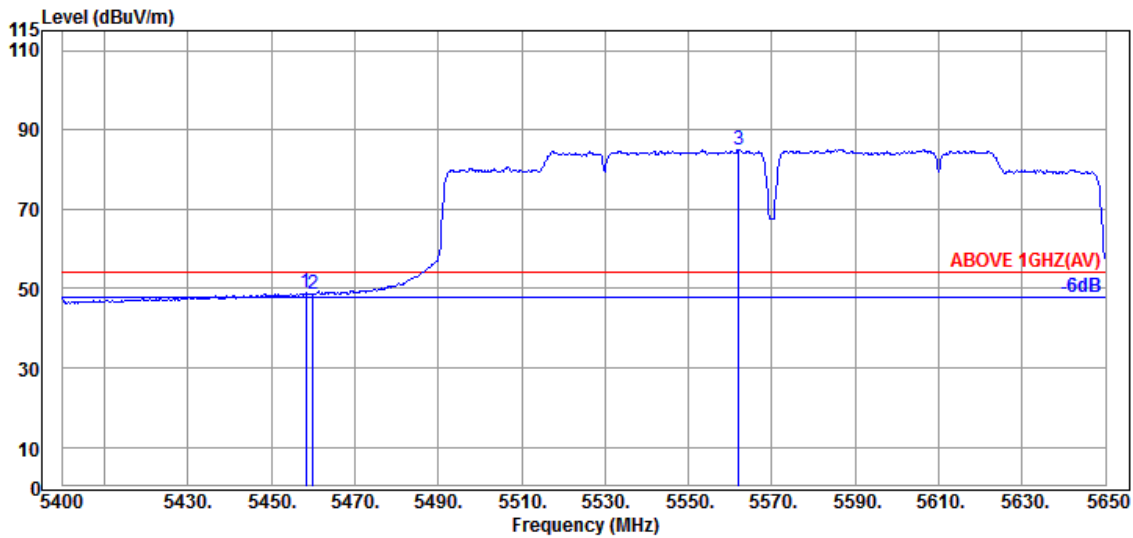


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.250 | 34.60 | 9.05 | 34.21 | 39.37 | 48.81 | 54.00 | 5.19 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 39.22 | 48.66 | 54.00 | 5.34 | Average |
| @ 5562.000 | 34.60 | 9.11 | 34.23 | 75.62 | 85.10 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

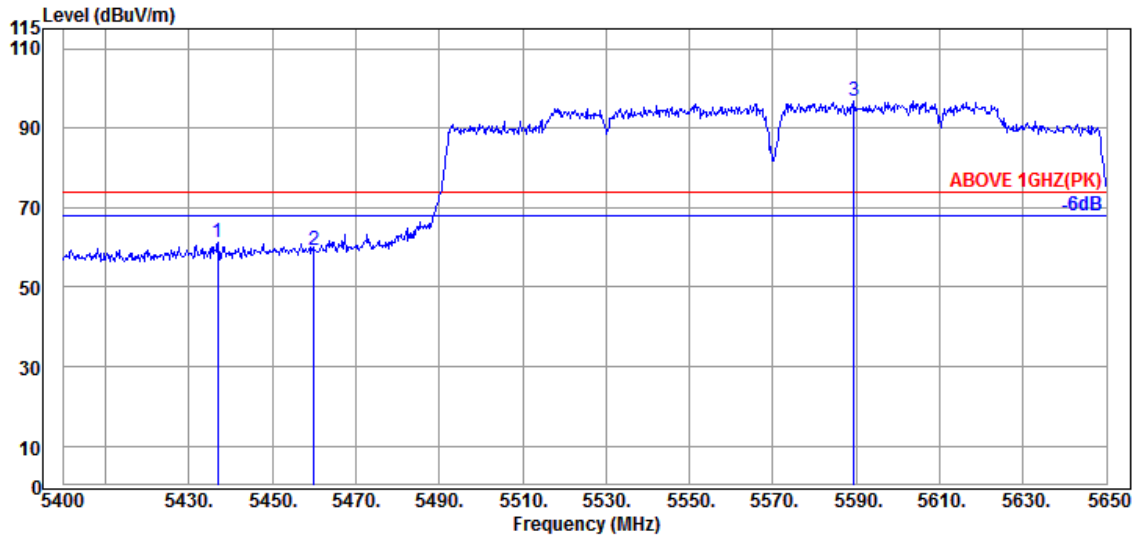

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5437.000 | 34.65 | 9.04 | 34.22 | 51.65 | 61.12 | 74.00 | 12.88 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 50.01 | 59.45 | 74.00 | 14.55 | Peak |
| @ 5589.500 | 34.50 | 9.12 | 34.24 | 87.37 | 96.75 | --- | --- | Peak |

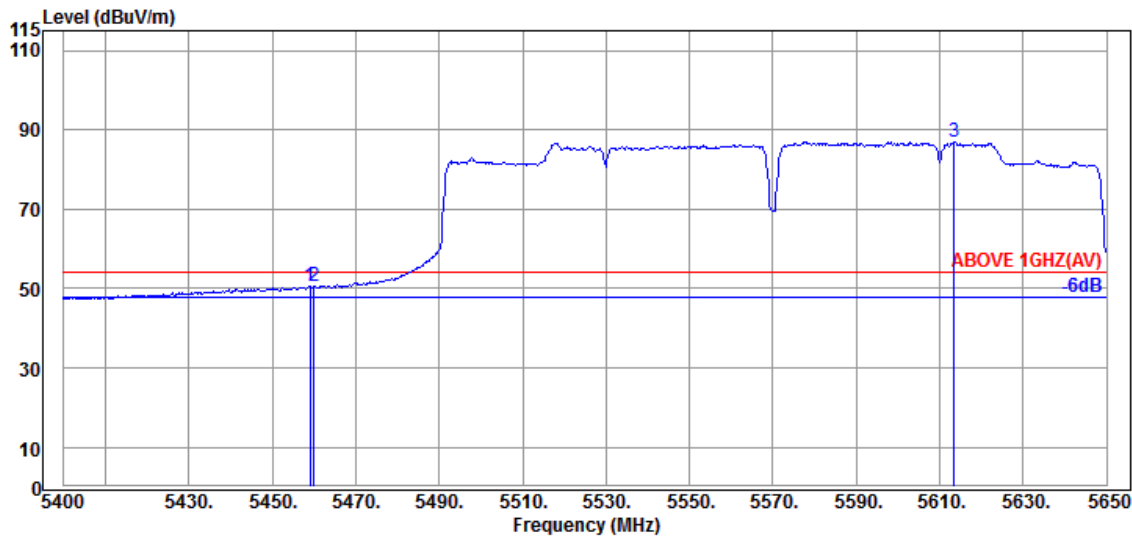


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.000 | 34.60 | 9.05 | 34.21 | 41.11 | 50.55 | 54.00 | 3.45 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 41.19 | 50.63 | 54.00 | 3.37 | Average |
| @ 5613.500 | 34.43 | 9.14 | 34.25 | 77.78 | 87.10 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VH160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

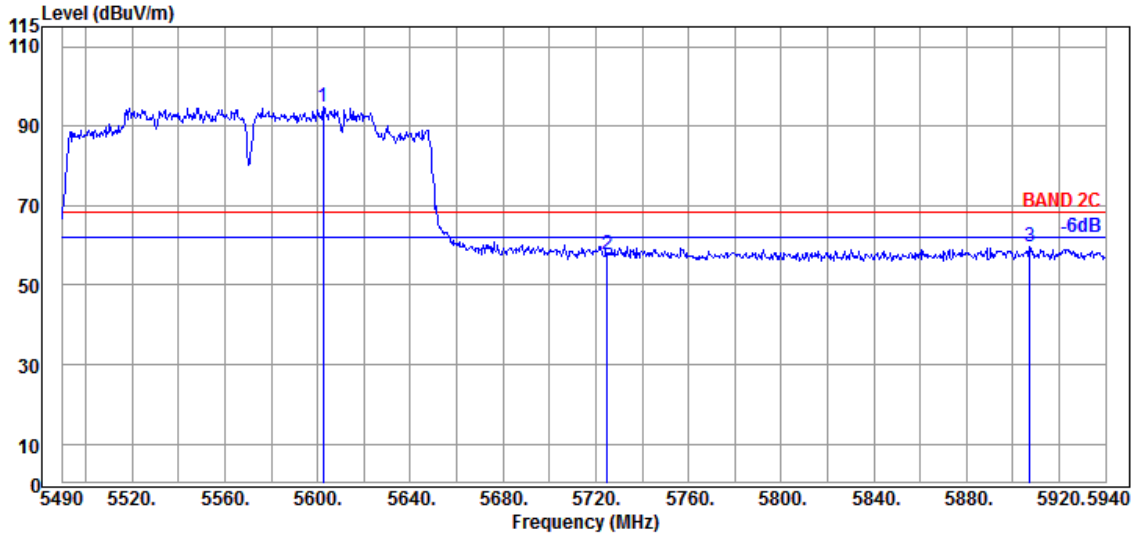

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5602.500 | 34.40 | 9.13 | 34.25 | 85.64 | 94.92 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 48.01 | 57.81 | 68.20 | 10.39 | Peak |
| 5907.150 | 35.77 | 9.29 | 34.39 | 49.19 | 59.86 | 68.20 | 8.34 | Peak |

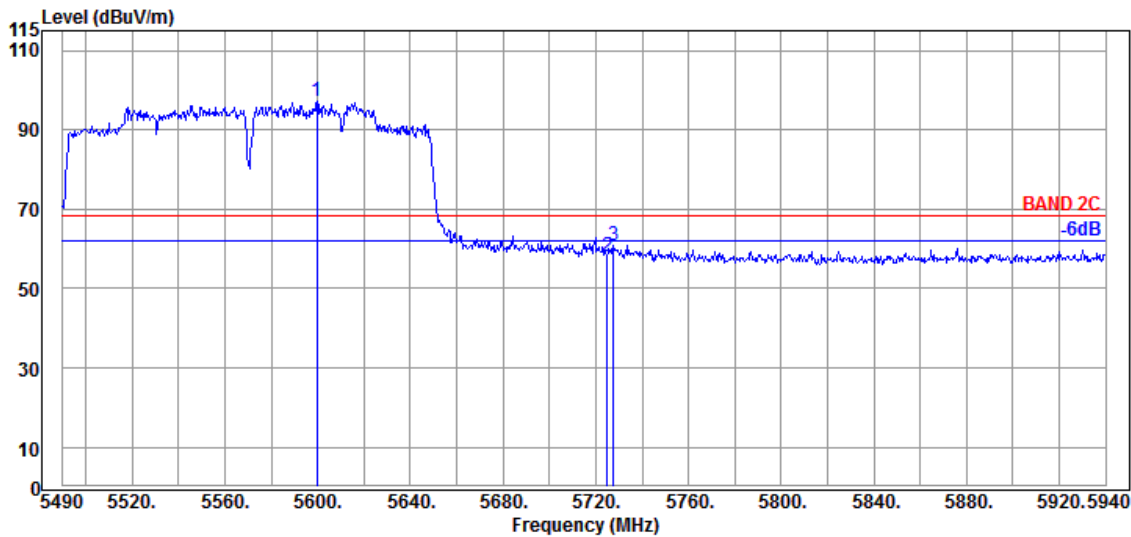


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5599.800 | 34.40 | 9.13 | 34.25 | 87.74 | 97.02 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 48.25 | 58.05 | 68.20 | 10.15 | Peak |
| 5727.600 | 34.90 | 9.20 | 34.31 | 51.23 | 61.02 | 68.20 | 7.18 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

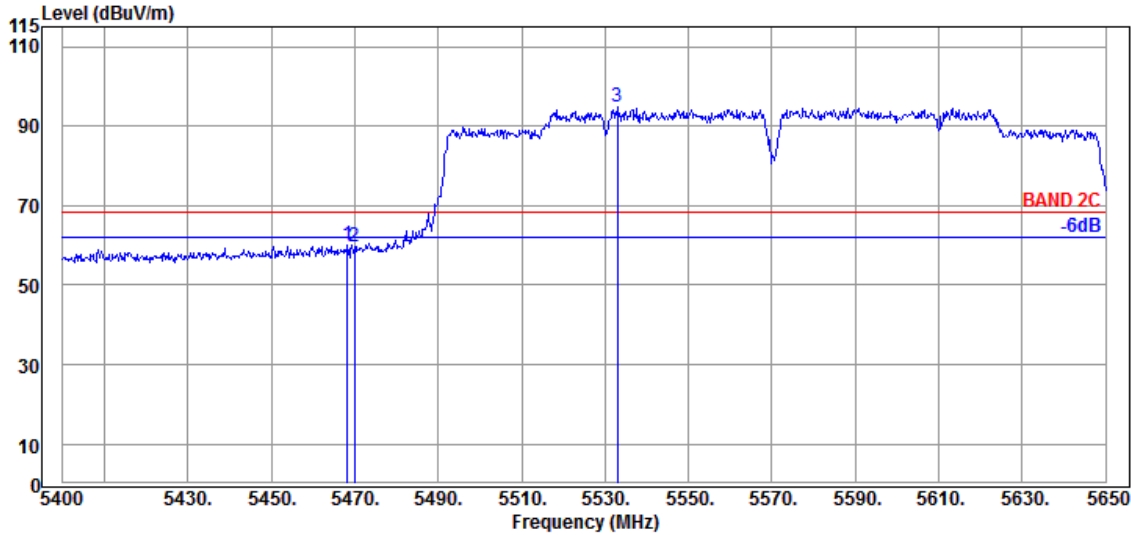

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.250 | 34.63 | 9.06 | 34.21 | 50.59 | 60.07 | 68.20 | 8.13 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 50.36 | 59.84 | 68.20 | 8.36 | Peak |
| @ 5533.000 | 34.70 | 9.09 | 34.22 | 85.26 | 94.83 | --- | --- | Peak |

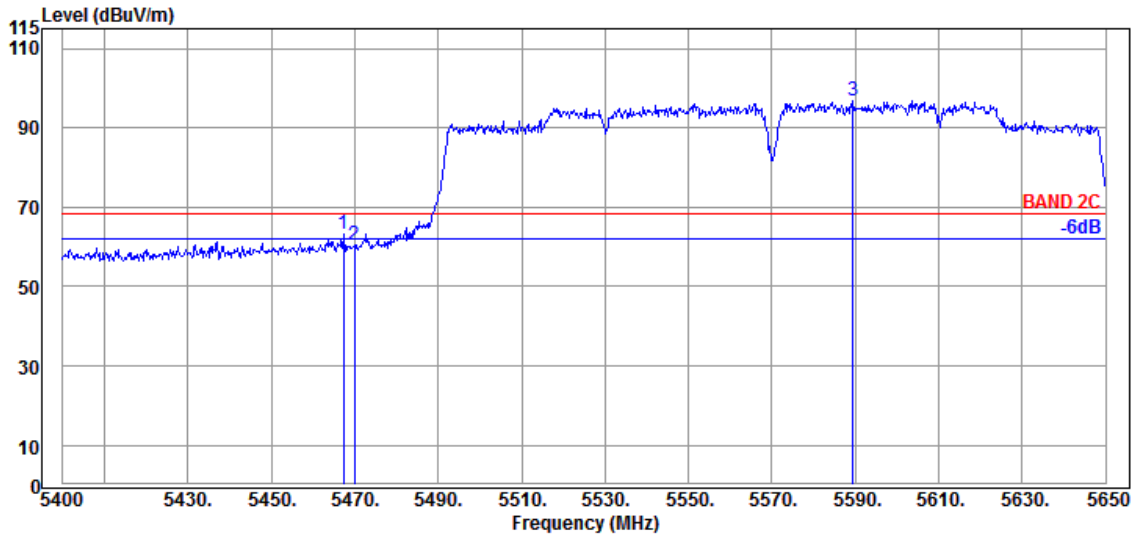


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.250 | 34.63 | 9.06 | 34.21 | 53.74 | 63.22 | 68.20 | 4.98 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 51.12 | 60.60 | 68.20 | 7.60 | Peak |
| @ 5589.500 | 34.50 | 9.12 | 34.24 | 87.37 | 96.75 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| | | Frequency | TX 5180MHz |

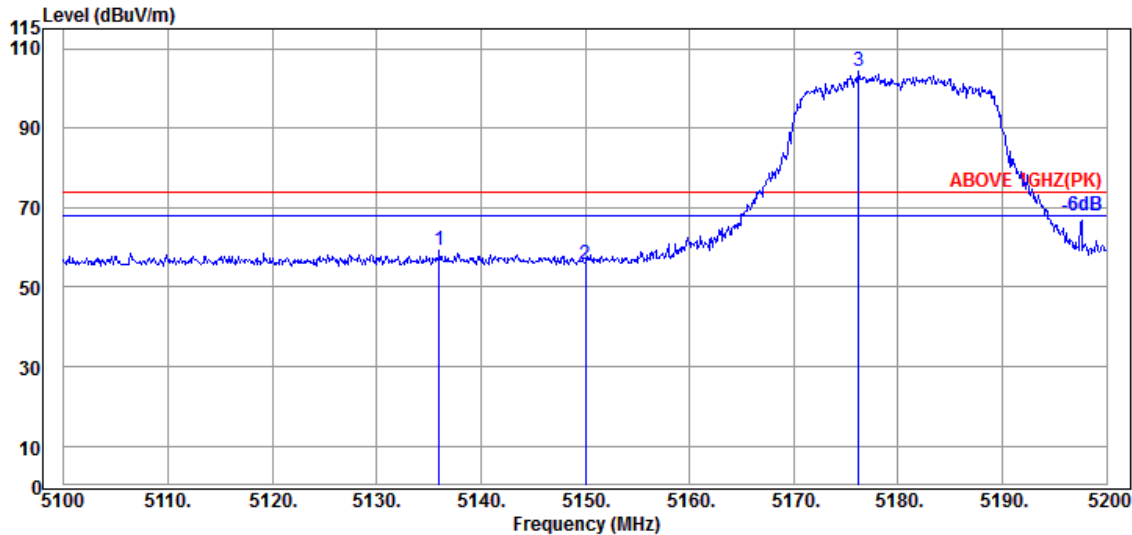

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5136.000 | 34.40 | 8.88 | 34.34 | 50.37 | 59.31 | 74.00 | 14.69 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 46.67 | 55.71 | 74.00 | 18.29 | Peak |
| @ 5176.200 | 34.63 | 8.90 | 34.32 | 95.08 | 104.29 | --- | --- | Peak |

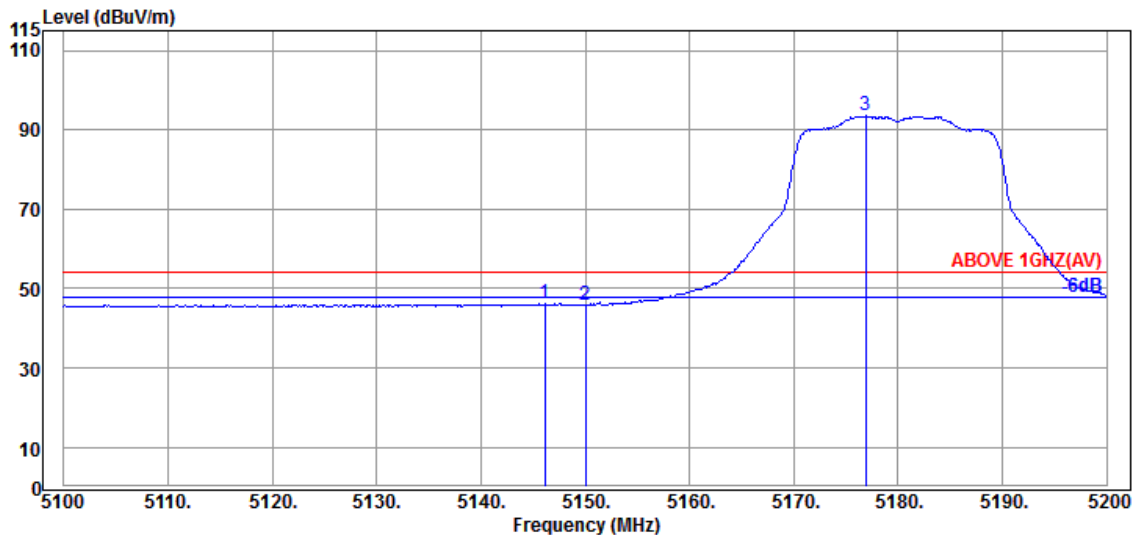


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.100 | 34.50 | 8.88 | 34.34 | 37.04 | 46.08 | 54.00 | 7.92 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.91 | 45.95 | 54.00 | 8.05 | Average |
| @ 5176.900 | 34.63 | 8.90 | 34.32 | 84.27 | 93.48 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| | | Frequency | TX 5180MHz |

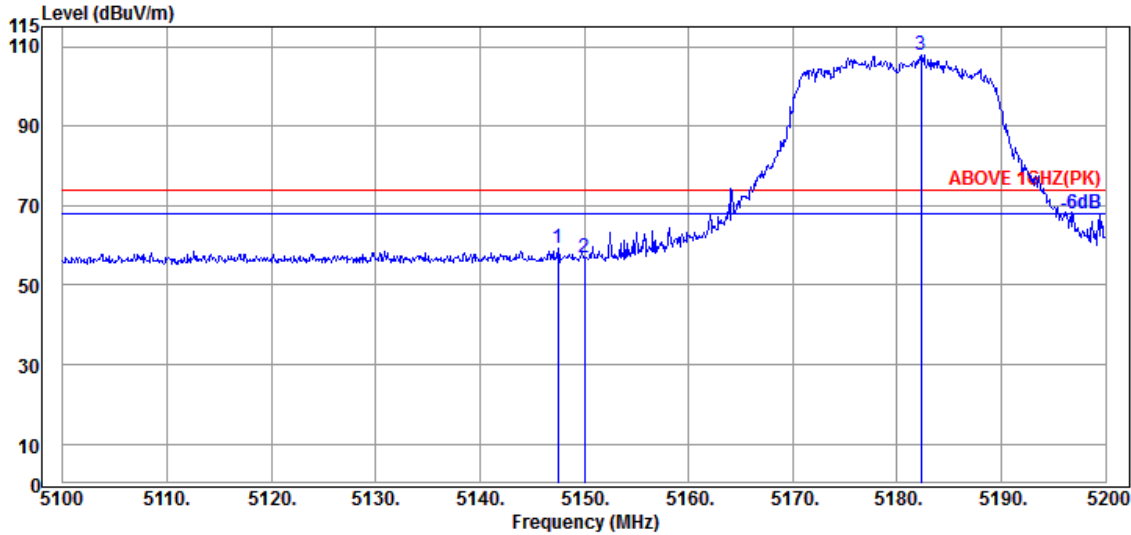

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.500 | 34.50 | 8.88 | 34.34 | 50.43 | 59.47 | 74.00 | 14.53 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 47.85 | 56.89 | 74.00 | 17.11 | Peak |
| @ 5182.300 | 34.63 | 8.90 | 34.32 | 98.72 | 107.93 | --- | --- | Peak |

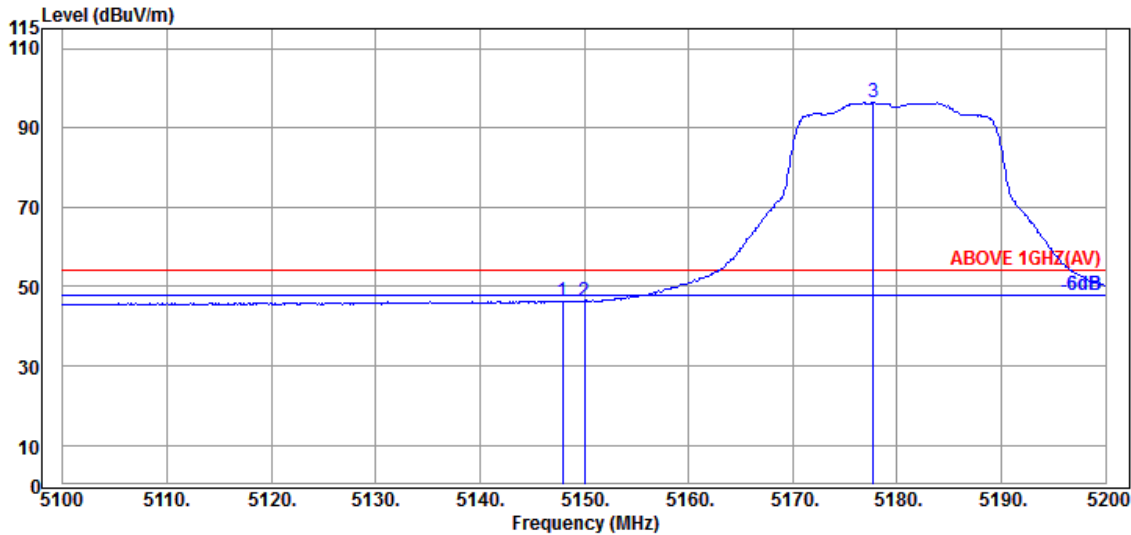


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.900 | 34.50 | 8.88 | 34.34 | 37.39 | 46.43 | 54.00 | 7.57 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 37.36 | 46.40 | 54.00 | 7.60 | Average |
| @ 5177.700 | 34.63 | 8.90 | 34.32 | 87.18 | 96.39 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| | | Frequency | TX 5320MHz |

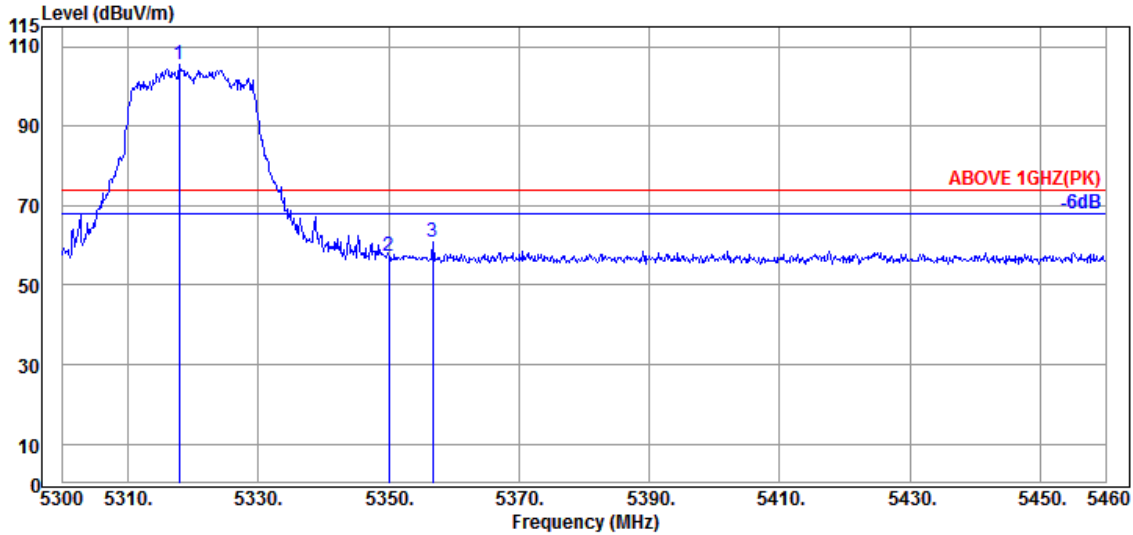

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5317.920 | 34.57 | 8.98 | 34.27 | 96.24 | 105.52 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 47.53 | 57.16 | 74.00 | 16.84 | Peak |
| 5356.800 | 34.87 | 9.00 | 34.26 | 51.34 | 60.95 | 74.00 | 13.05 | Peak |

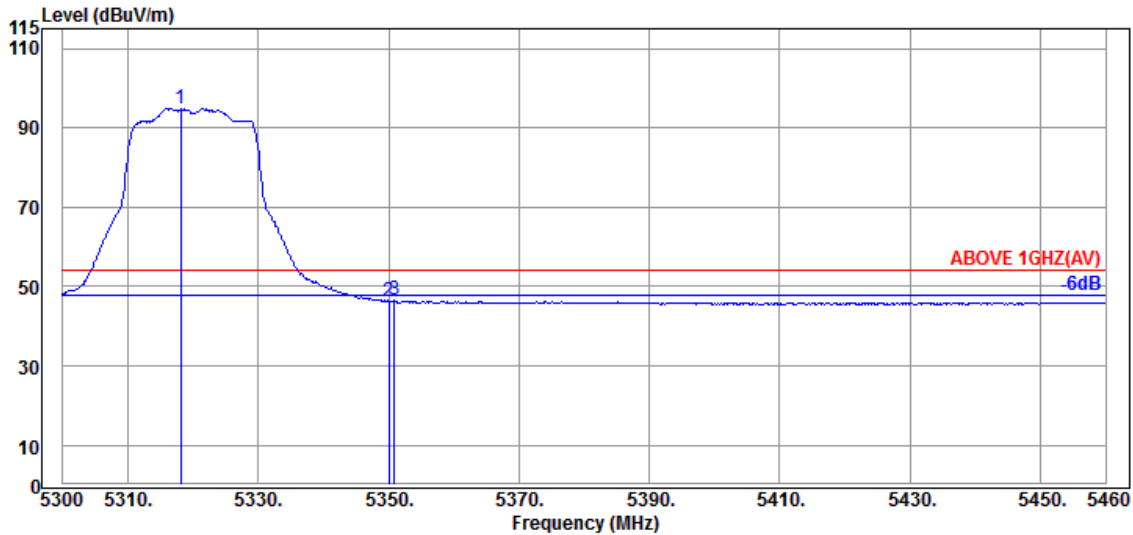


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.080 | 34.57 | 8.98 | 34.27 | 85.52 | 94.80 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.68 | 46.31 | 54.00 | 7.69 | Average |
| 5350.880 | 34.90 | 8.99 | 34.26 | 36.89 | 46.52 | 54.00 | 7.48 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| | | Frequency | TX 5320MHz |

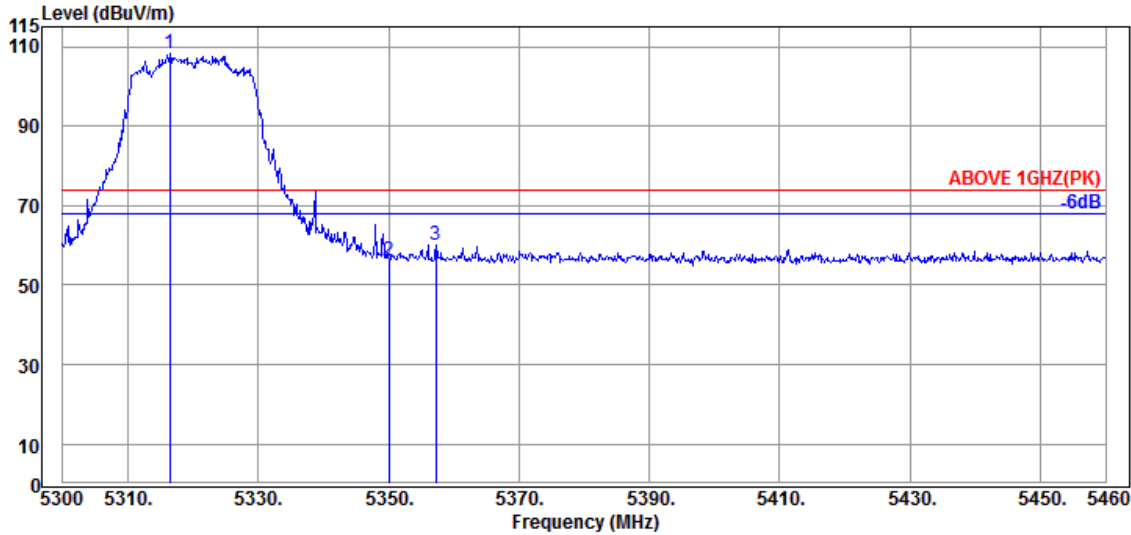

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.480 | 34.57 | 8.98 | 34.27 | 98.99 | 108.27 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 46.63 | 56.26 | 74.00 | 17.74 | Peak |
| 5357.280 | 34.87 | 9.00 | 34.26 | 50.60 | 60.21 | 74.00 | 13.79 | Peak |

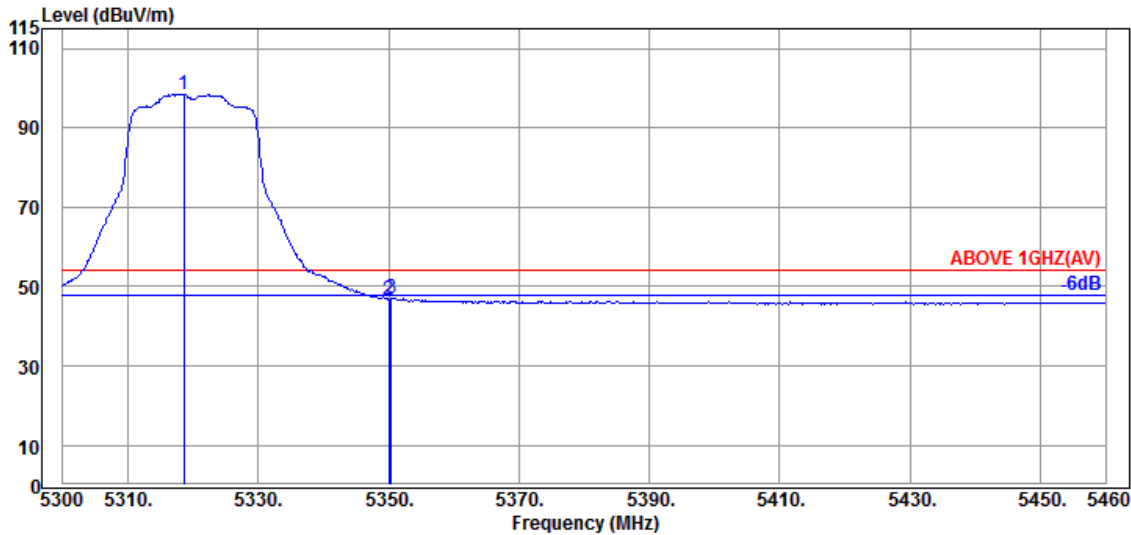


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.560 | 34.57 | 8.98 | 34.27 | 89.21 | 98.49 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 37.08 | 46.71 | 54.00 | 7.29 | Average |
| 5350.400 | 34.90 | 8.99 | 34.26 | 37.53 | 47.16 | 54.00 | 6.84 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5500MHz |

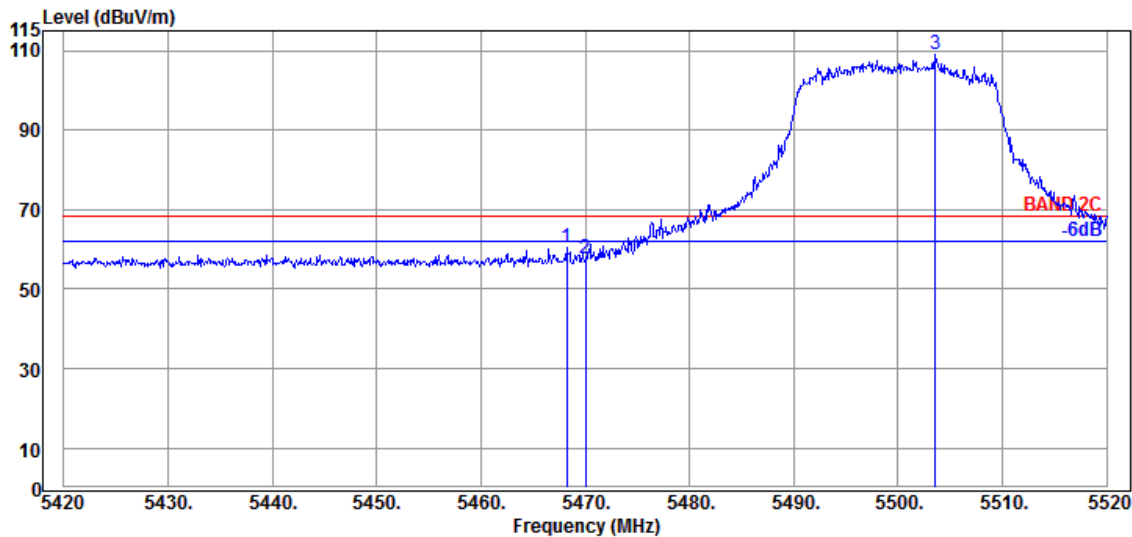

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.200 | 34.63 | 9.06 | 34.21 | 51.15 | 60.63 | 68.20 | 7.57 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 48.33 | 57.81 | 68.20 | 10.39 | Peak |
| @ 5503.600 | 34.70 | 9.08 | 34.20 | 99.46 | 109.04 | --- | --- | Peak |

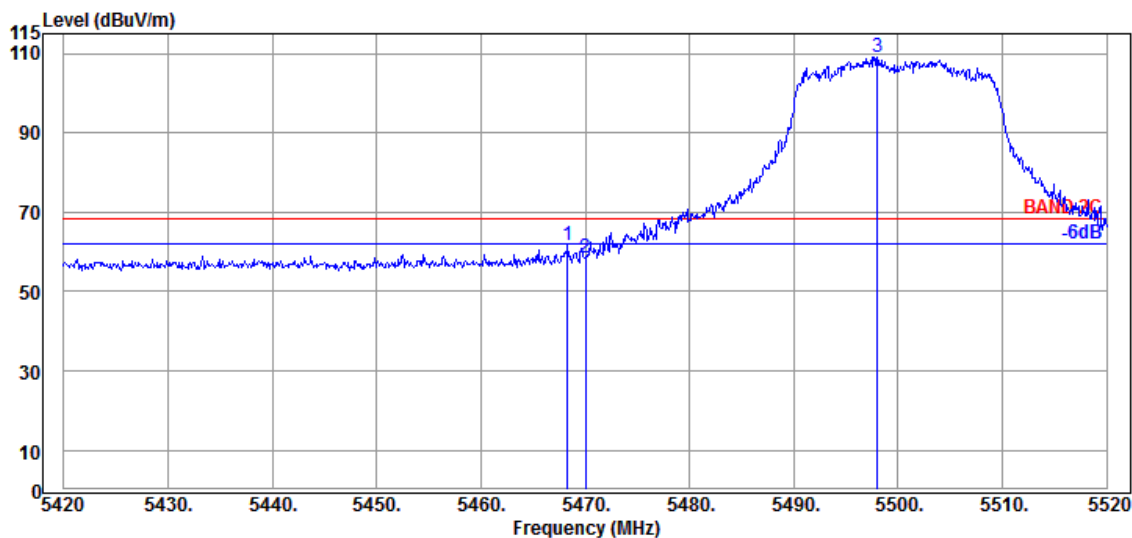


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.300 | 34.63 | 9.06 | 34.21 | 52.26 | 61.74 | 68.20 | 6.46 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 49.15 | 58.63 | 68.20 | 9.57 | Peak |
| @ 5498.000 | 34.70 | 9.08 | 34.20 | 99.58 | 109.16 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5500MHz |

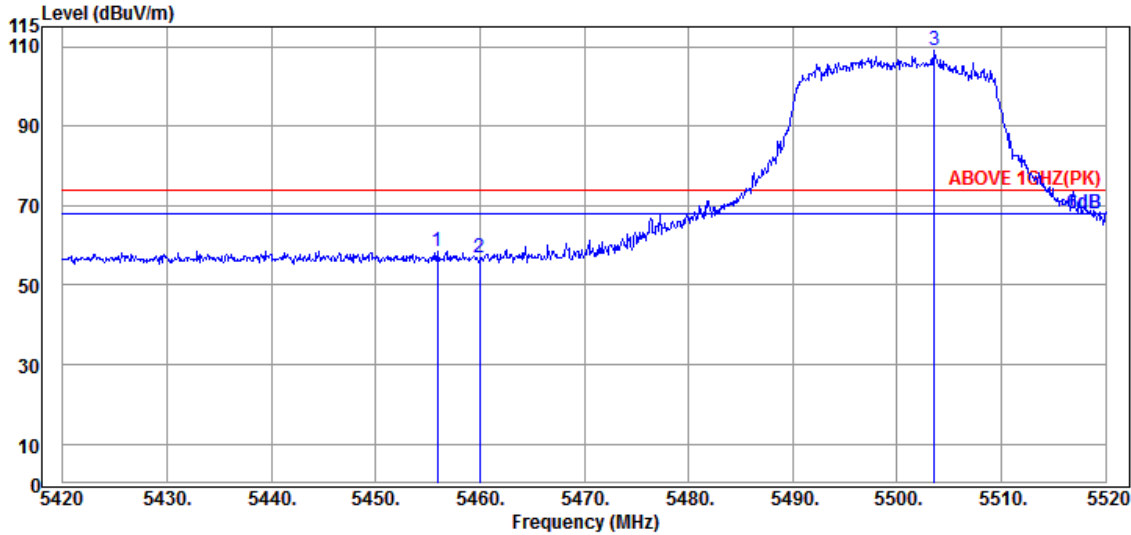

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5455.900 | 34.60 | 9.05 | 34.21 | 49.20 | 58.64 | 74.00 | 15.36 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.32 | 56.76 | 74.00 | 17.24 | Peak |
| @ 5503.600 | 34.70 | 9.08 | 34.20 | 99.46 | 109.04 | --- | --- | Peak |

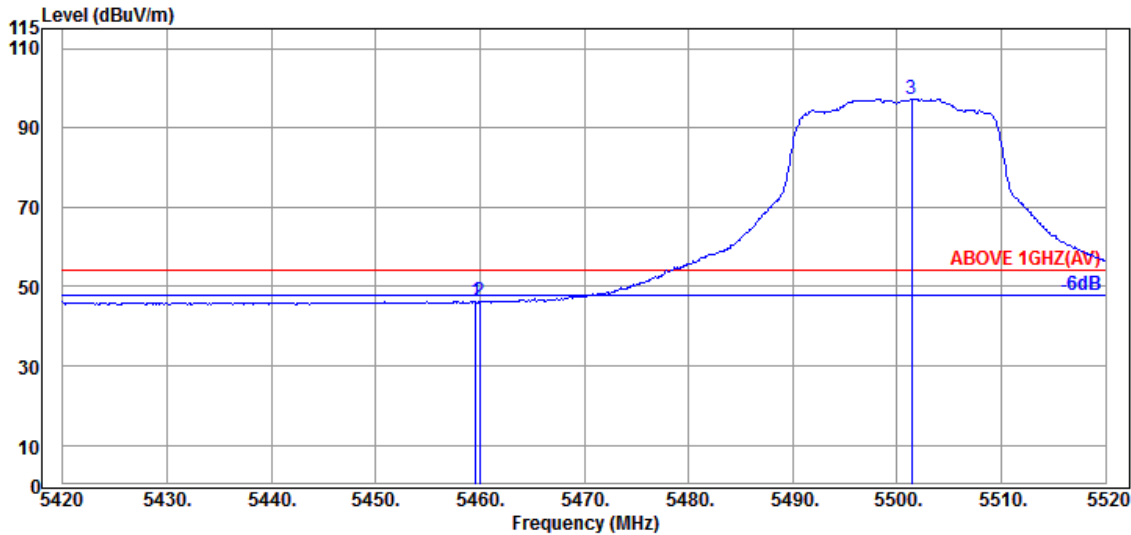


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.600 | 34.60 | 9.05 | 34.21 | 36.83 | 46.27 | 54.00 | 7.73 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.75 | 46.19 | 54.00 | 7.81 | Average |
| @ 5501.400 | 34.70 | 9.08 | 34.20 | 87.67 | 97.25 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5500MHz |

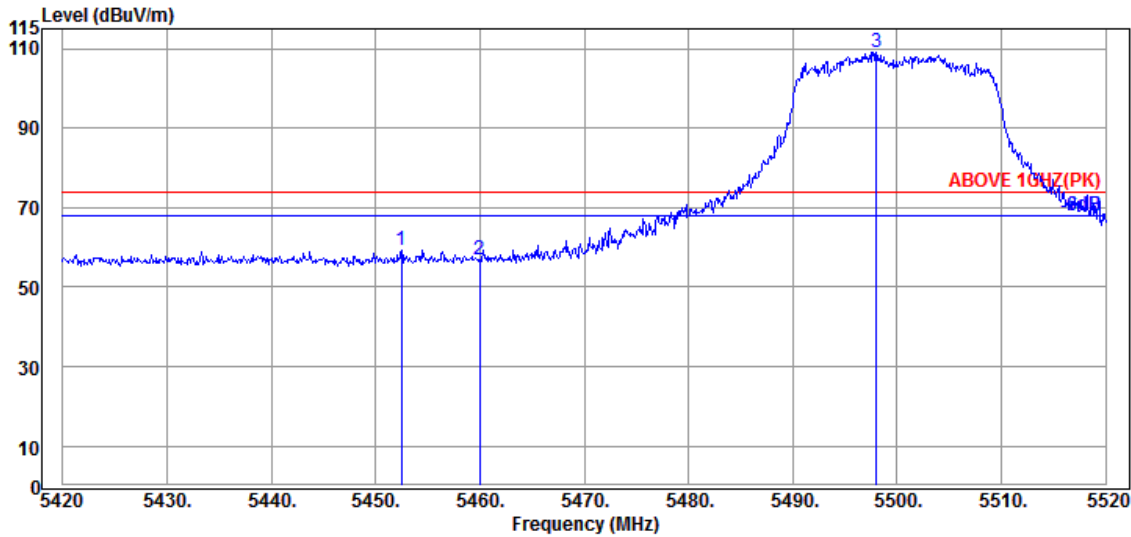

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5452.500 | 34.60 | 9.05 | 34.21 | 49.75 | 59.19 | 74.00 | 14.81 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.52 | 56.96 | 74.00 | 17.04 | Peak |
| @ 5498.000 | 34.70 | 9.08 | 34.20 | 99.58 | 109.16 | --- | --- | Peak |

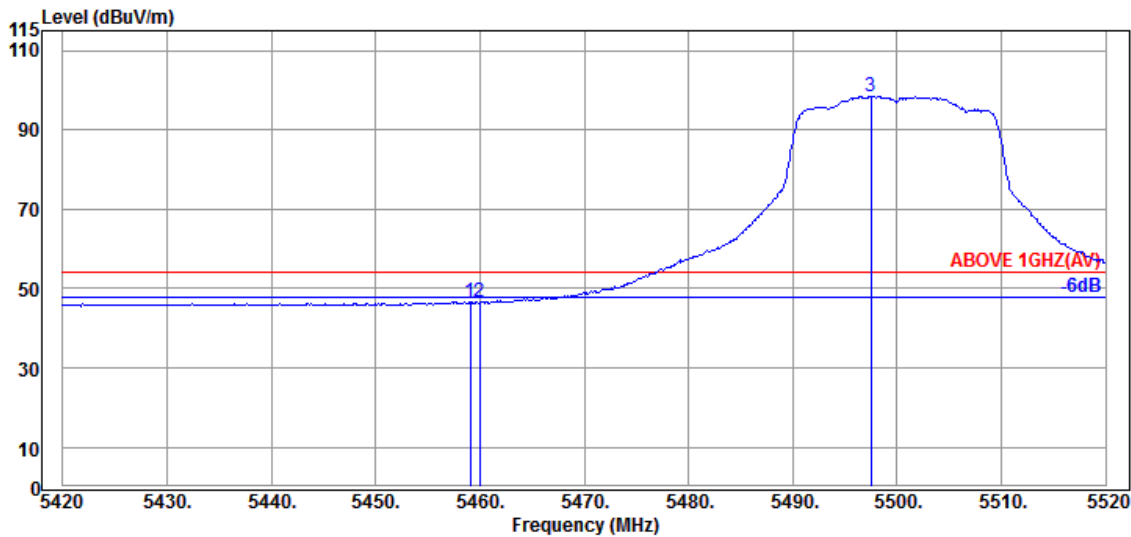


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.100 | 34.60 | 9.05 | 34.21 | 37.21 | 46.65 | 54.00 | 7.35 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 37.21 | 46.65 | 54.00 | 7.35 | Average |
| @ 5497.500 | 34.70 | 9.08 | 34.20 | 88.92 | 98.50 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5700MHz |

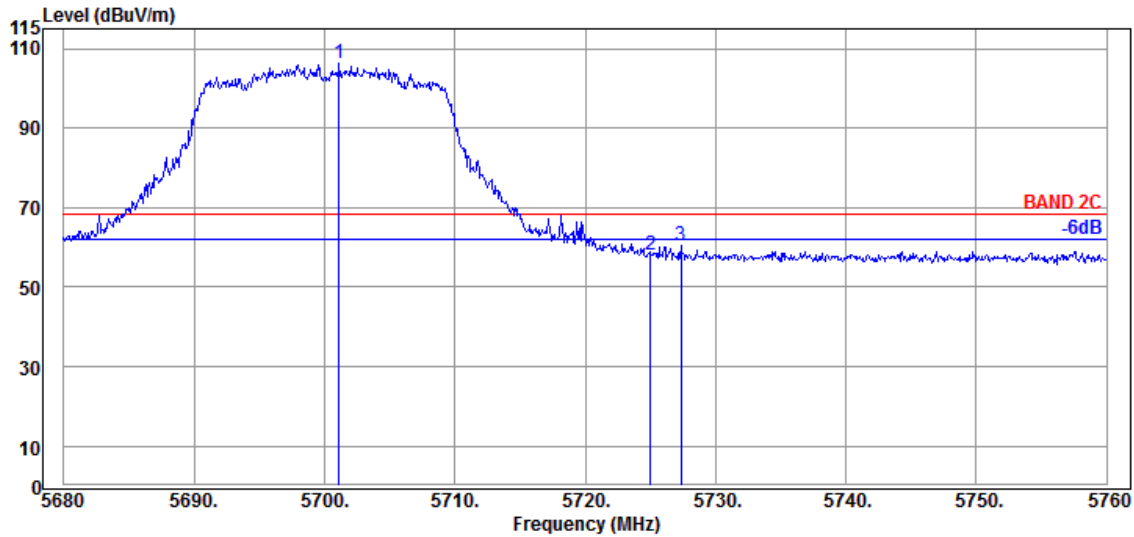

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5701.120 | 34.70 | 9.18 | 34.29 | 96.66 | 106.25 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 48.38 | 58.18 | 68.20 | 10.02 | Peak |
| 5727.360 | 34.90 | 9.20 | 34.31 | 50.51 | 60.30 | 68.20 | 7.90 | Peak |

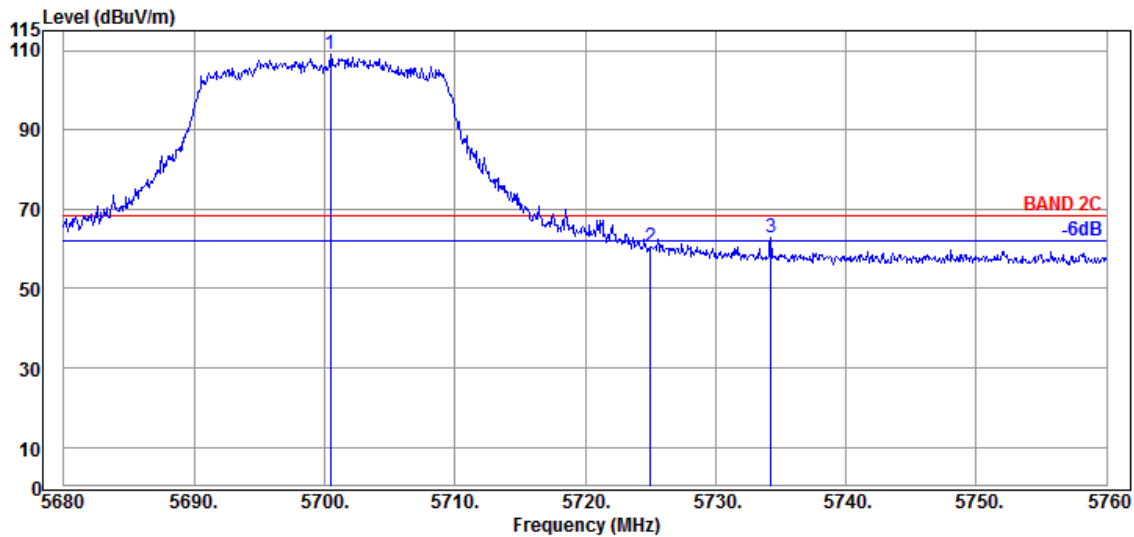


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5700.480 | 34.70 | 9.18 | 34.29 | 99.58 | 109.17 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 50.76 | 60.56 | 68.20 | 7.64 | Peak |
| 5734.240 | 34.90 | 9.20 | 34.31 | 53.23 | 63.02 | 68.20 | 5.18 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

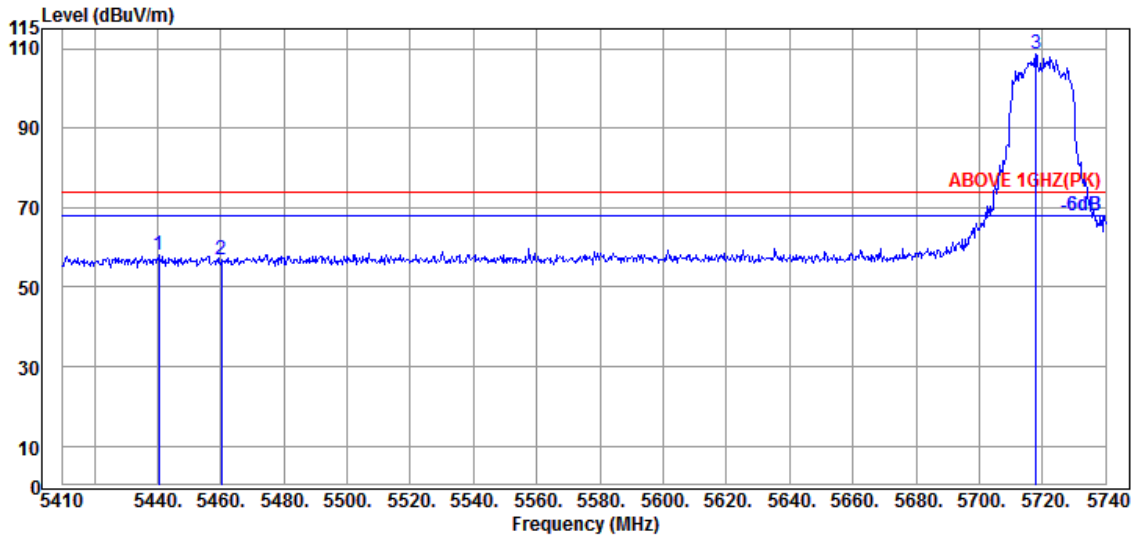

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5440.360 | 34.65 | 9.04 | 34.22 | 48.48 | 57.95 | 68.20 | 10.25 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 47.44 | 56.88 | 68.20 | 11.32 | Peak |
| 5717.890 | 34.80 | 9.19 | 34.30 | 98.96 | 108.65 | --- | --- | Peak |

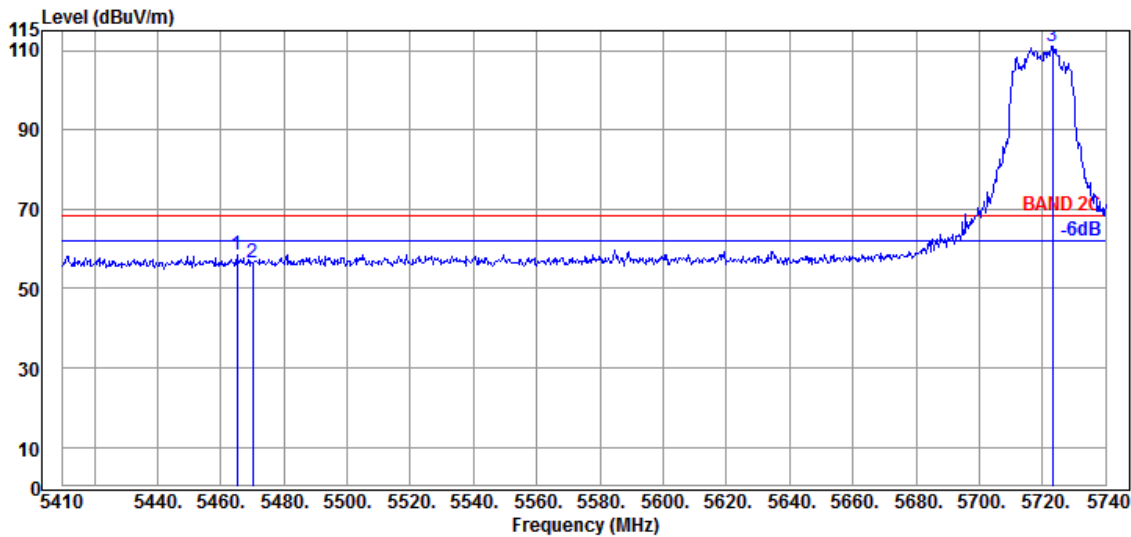


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5465.110 | 34.63 | 9.06 | 34.21 | 49.07 | 58.55 | 68.20 | 9.65 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 47.07 | 56.55 | 68.20 | 11.65 | Peak |
| 5723.170 | 34.90 | 9.20 | 34.30 | 101.08 | 110.88 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

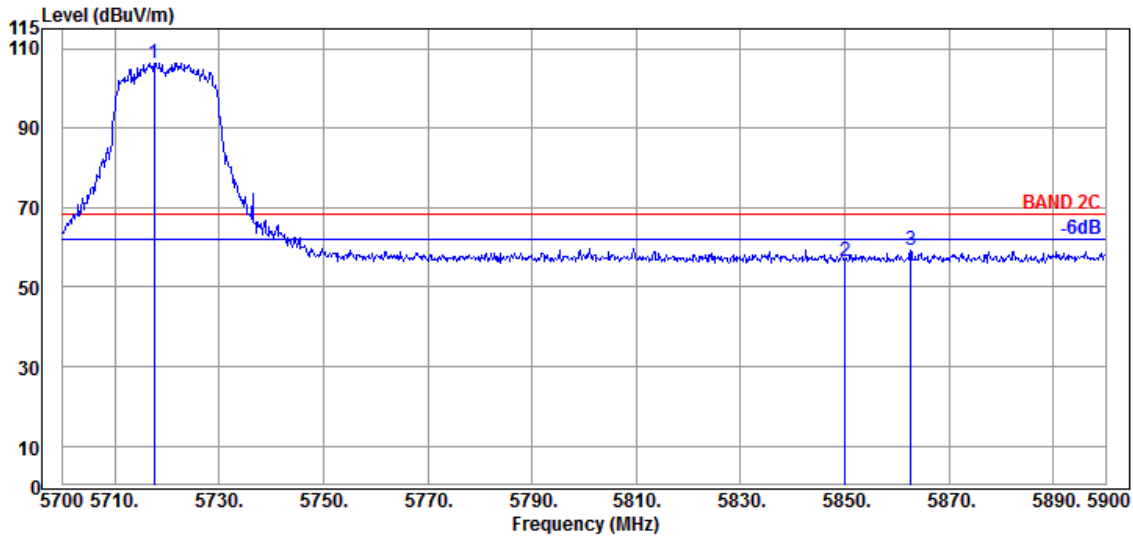

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5717.600 | 34.80 | 9.19 | 34.30 | 96.76 | 106.45 | --- | --- | Peak |
| 5850.000 | 35.40 | 9.25 | 34.36 | 46.23 | 56.52 | 68.20 | 11.68 | Peak |
| 5862.600 | 35.53 | 9.26 | 34.37 | 48.85 | 59.27 | 68.20 | 8.93 | Peak |

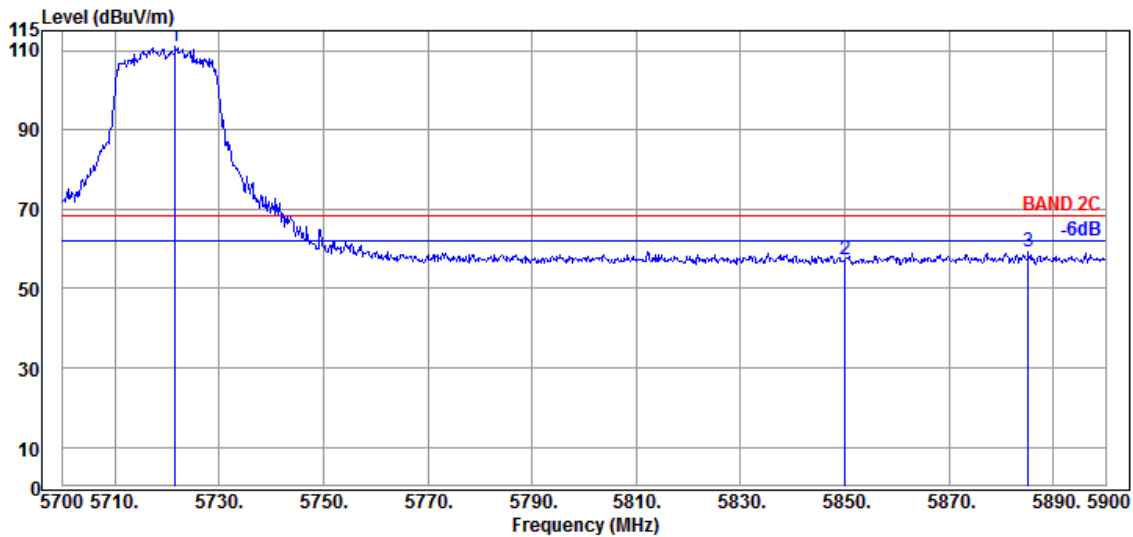


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5721.600 | 34.53 | 11.36 | 34.32 | 99.29 | 110.86 | --- | --- | Peak |
| 5850.000 | 35.10 | 11.37 | 34.38 | 45.14 | 57.23 | 68.20 | 10.97 | Peak |
| 5885.200 | 35.30 | 11.38 | 34.40 | 47.01 | 59.29 | 68.20 | 8.91 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

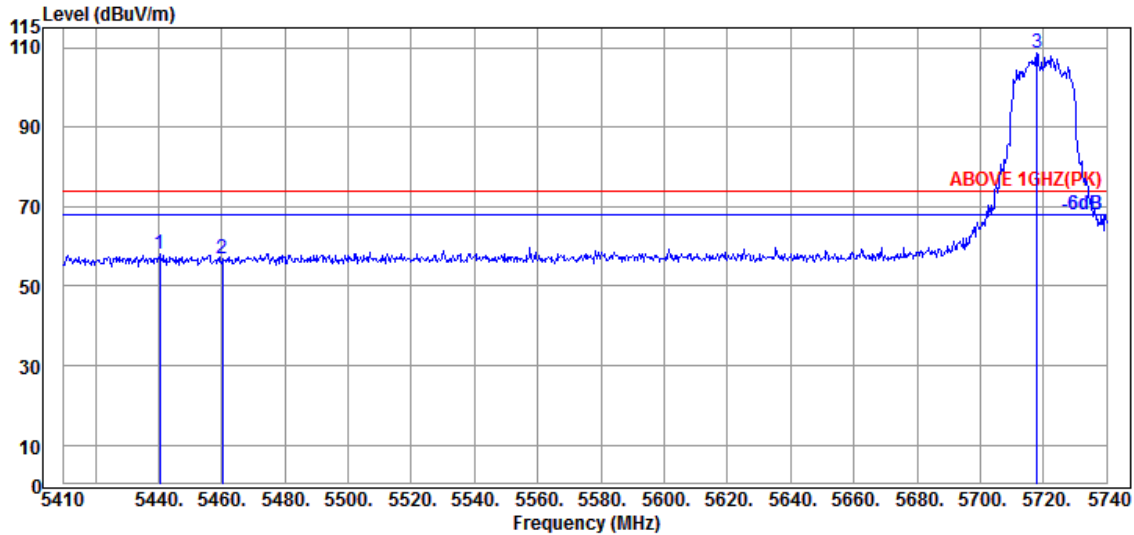

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5440.360 | 34.65 | 9.04 | 34.22 | 48.48 | 57.95 | 74.00 | 16.05 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 47.44 | 56.88 | 74.00 | 17.12 | Peak |
| @ 5717.890 | 34.80 | 9.19 | 34.30 | 98.96 | 108.65 | --- | --- | Peak |

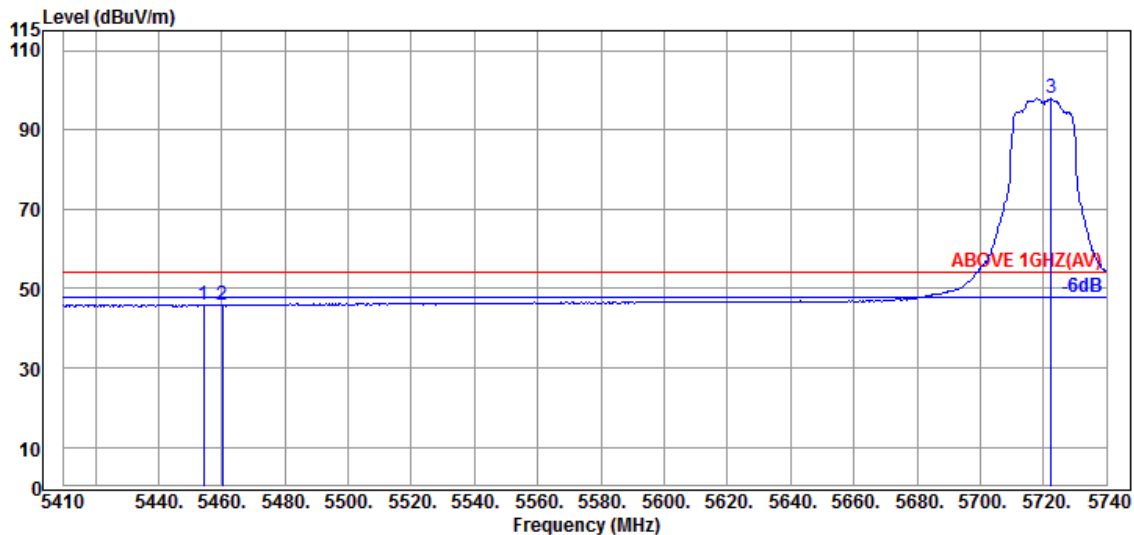


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5454.220 | 34.60 | 9.05 | 34.21 | 36.50 | 45.94 | 54.00 | 8.06 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.36 | 45.80 | 54.00 | 8.20 | Average |
| @ 5722.510 | 34.90 | 9.20 | 34.30 | 88.08 | 97.88 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

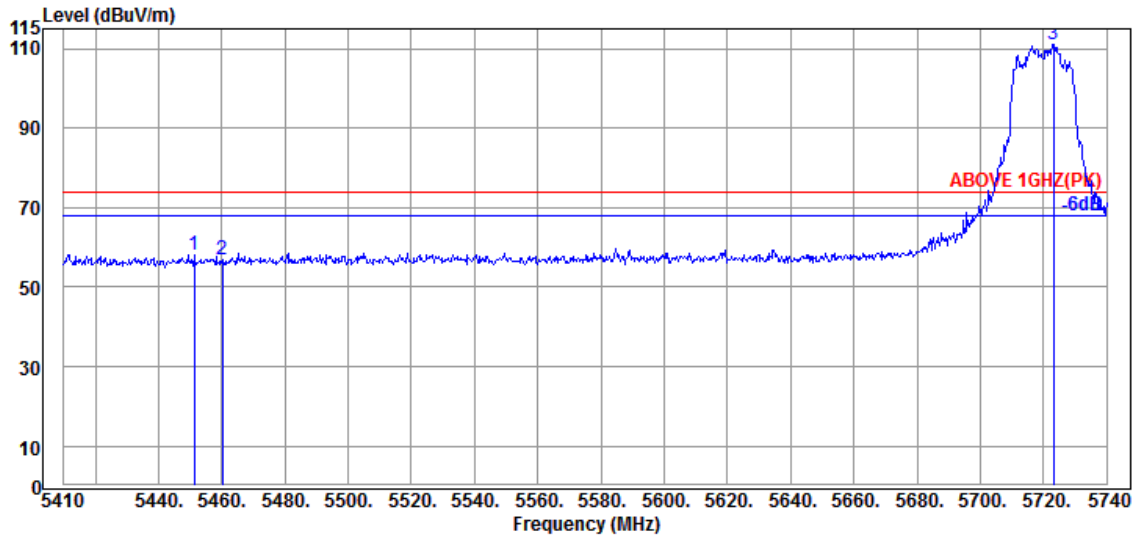

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5451.250 | 34.60 | 9.05 | 34.22 | 48.74 | 58.17 | 74.00 | 15.83 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 47.42 | 56.86 | 74.00 | 17.14 | Peak |
| @ 5723.170 | 34.90 | 9.20 | 34.30 | 101.08 | 110.88 | --- | --- | Peak |

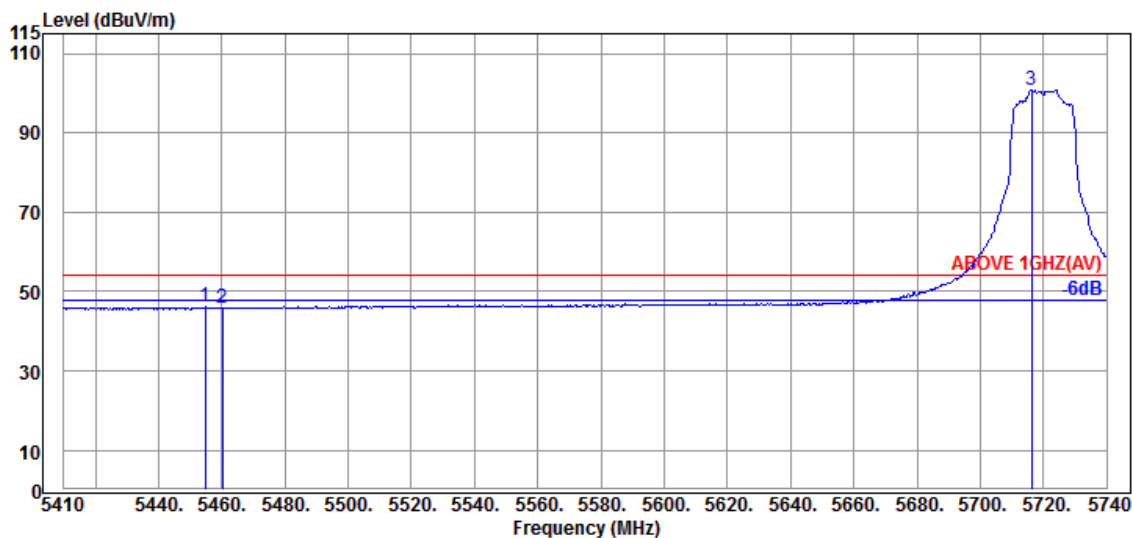


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5454.880 | 34.60 | 9.05 | 34.21 | 36.60 | 46.04 | 54.00 | 7.96 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.40 | 45.84 | 54.00 | 8.16 | Average |
| @ 5716.240 | 34.80 | 9.19 | 34.30 | 91.28 | 100.97 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ac-HE20 | U-NII Band | 3 |
| | | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

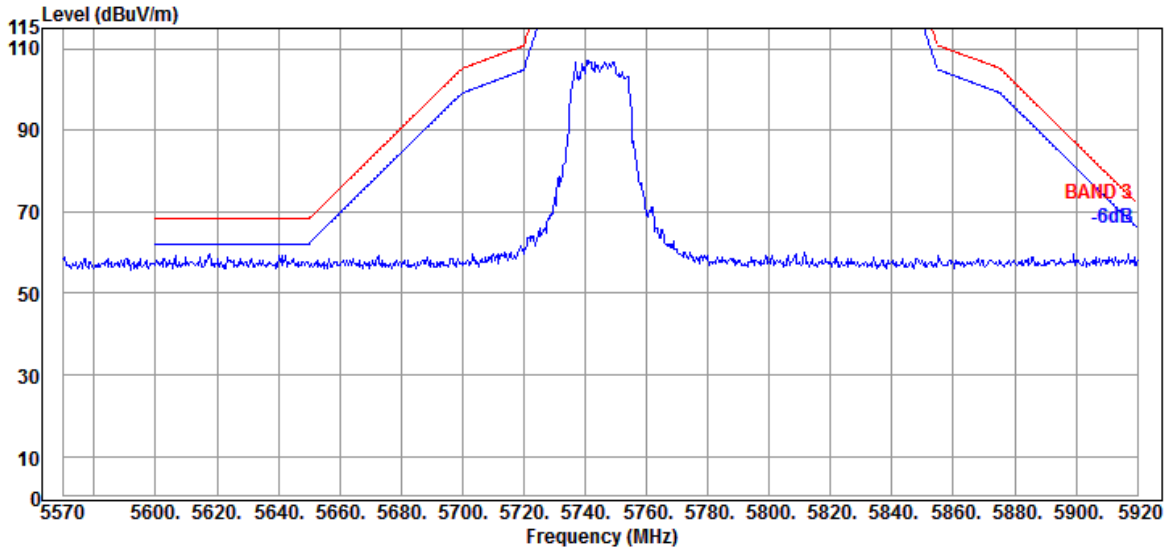


Antenna at Vertical Polarization

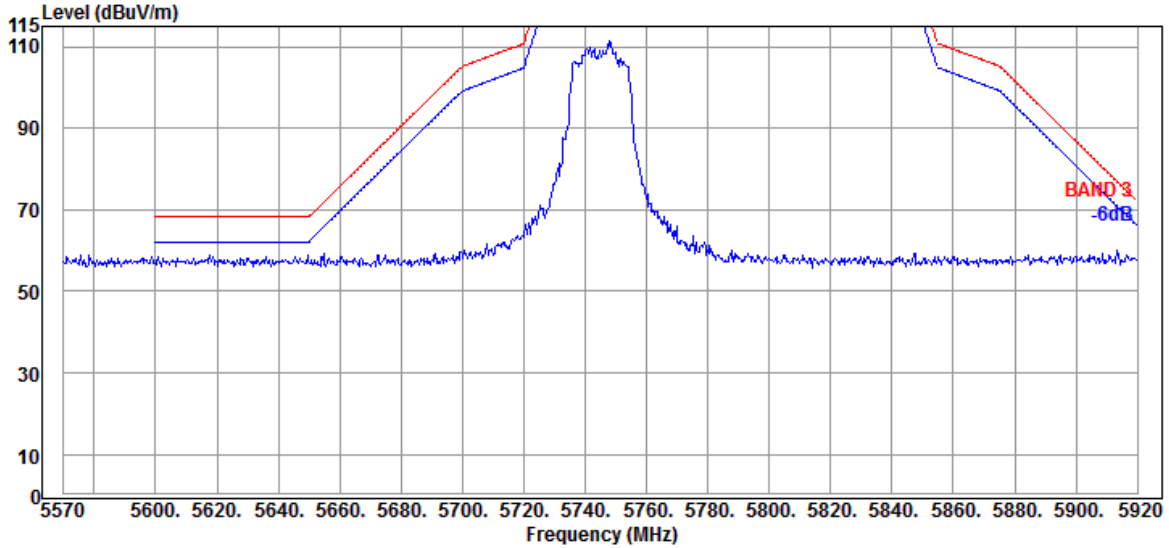


| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ac-HE20 | U-NII Band | 3 |
| | | Frequency | TX 5825MHz |


Antenna at Horizontal Polarization

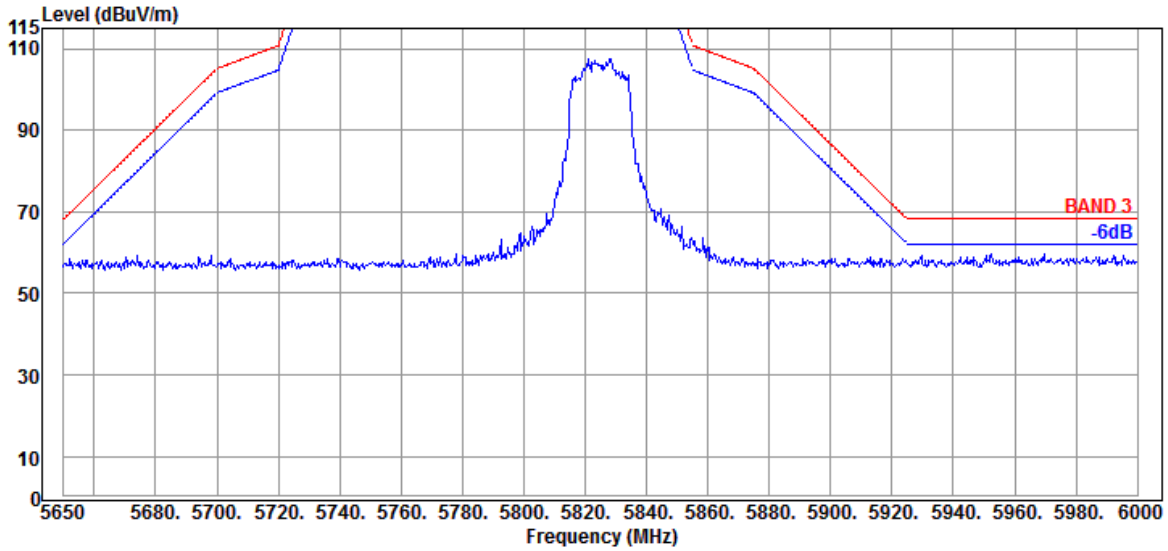

Antenna at Vertical Polarization

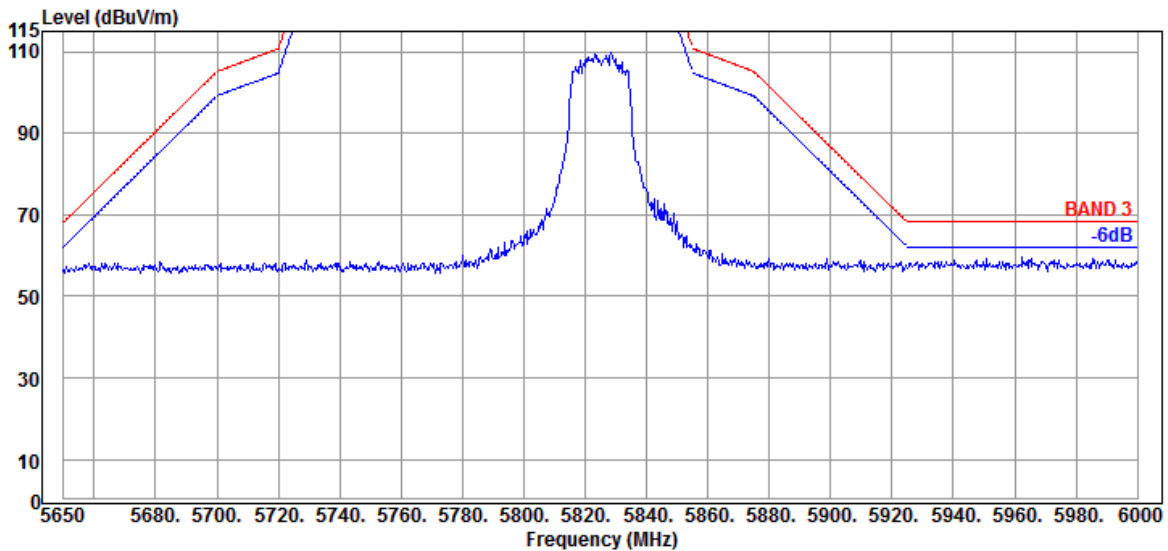


| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| | | Frequency | TX 5190MHz |

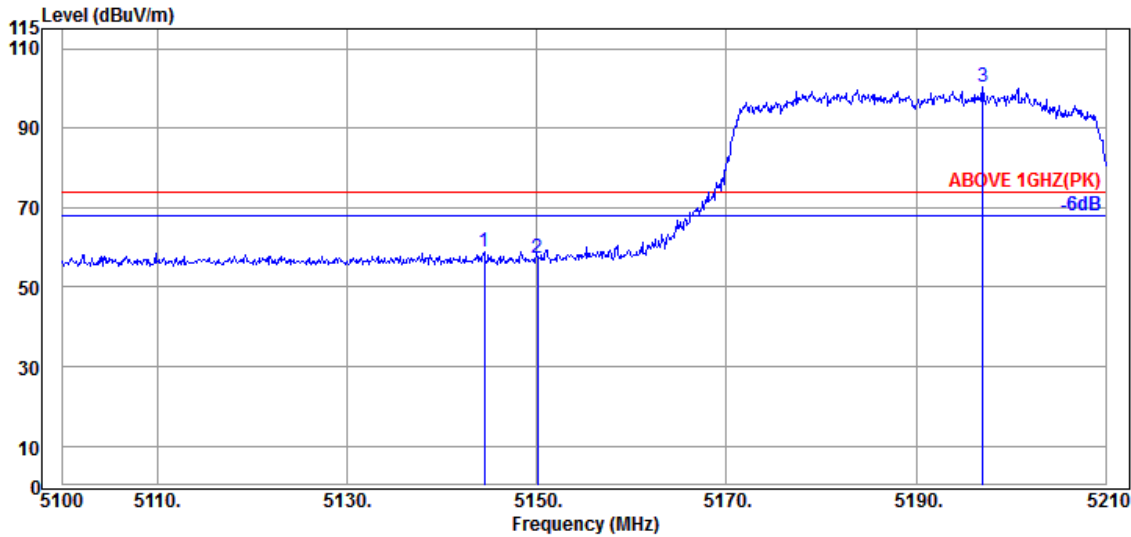

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5144.440 | 34.50 | 8.88 | 34.34 | 49.89 | 58.93 | 74.00 | 15.07 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 48.13 | 57.17 | 74.00 | 16.83 | Peak |
| @ 5197.020 | 34.70 | 8.91 | 34.32 | 91.15 | 100.44 | --- | --- | Peak |

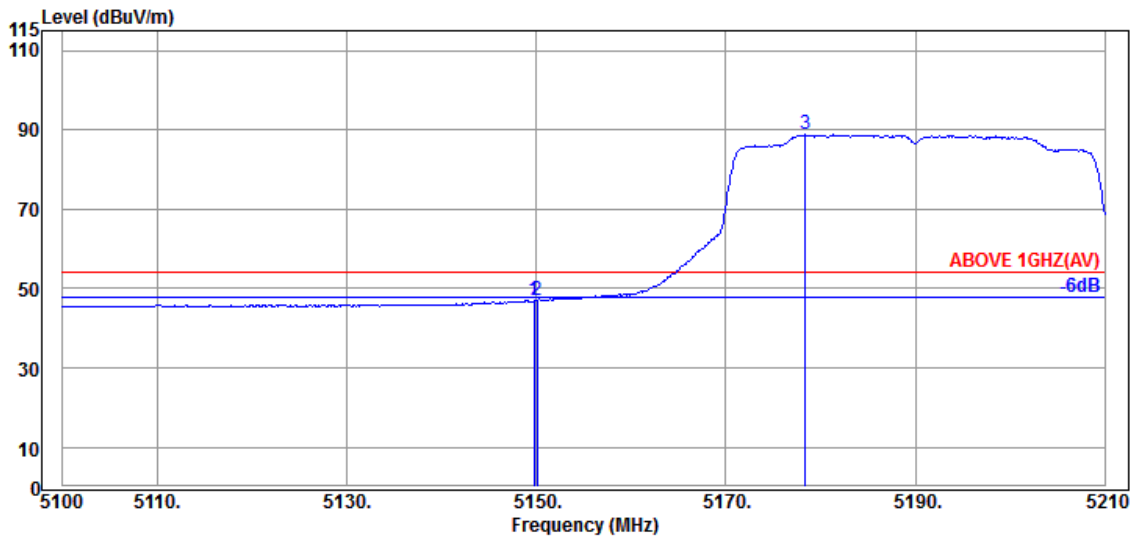


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720 | 34.50 | 8.88 | 34.34 | 37.90 | 46.94 | 54.00 | 7.06 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 38.04 | 47.08 | 54.00 | 6.92 | Average |
| @ 5178.430 | 34.63 | 8.90 | 34.32 | 79.62 | 88.83 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| | | Frequency | TX 5190MHz |

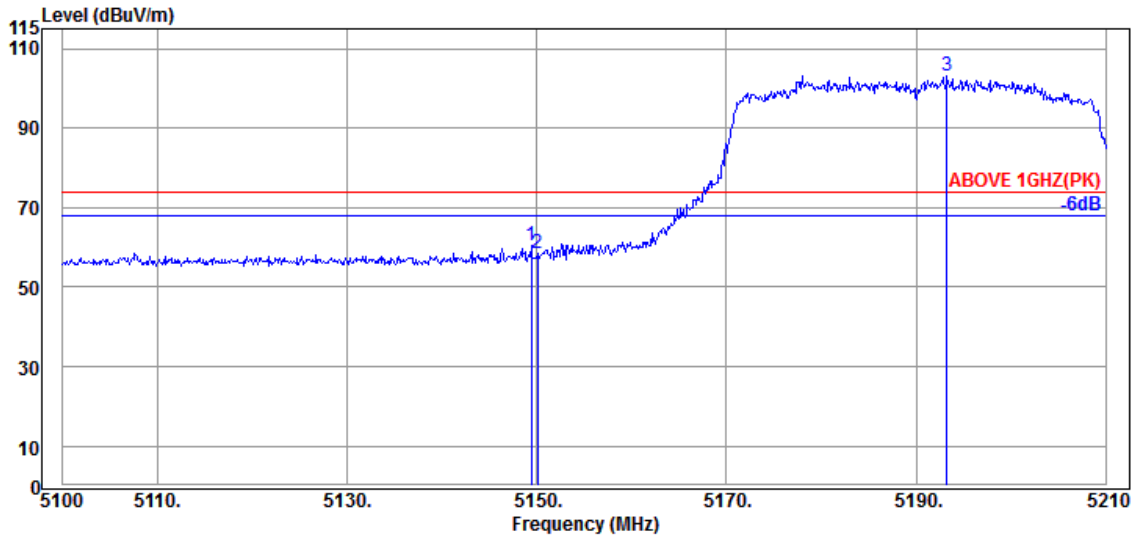

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.390 | 34.50 | 8.88 | 34.34 | 51.28 | 60.32 | 74.00 | 13.68 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 49.39 | 58.43 | 74.00 | 15.57 | Peak |
| @ 5193.280 | 34.70 | 8.91 | 34.32 | 93.82 | 103.11 | --- | --- | Peak |

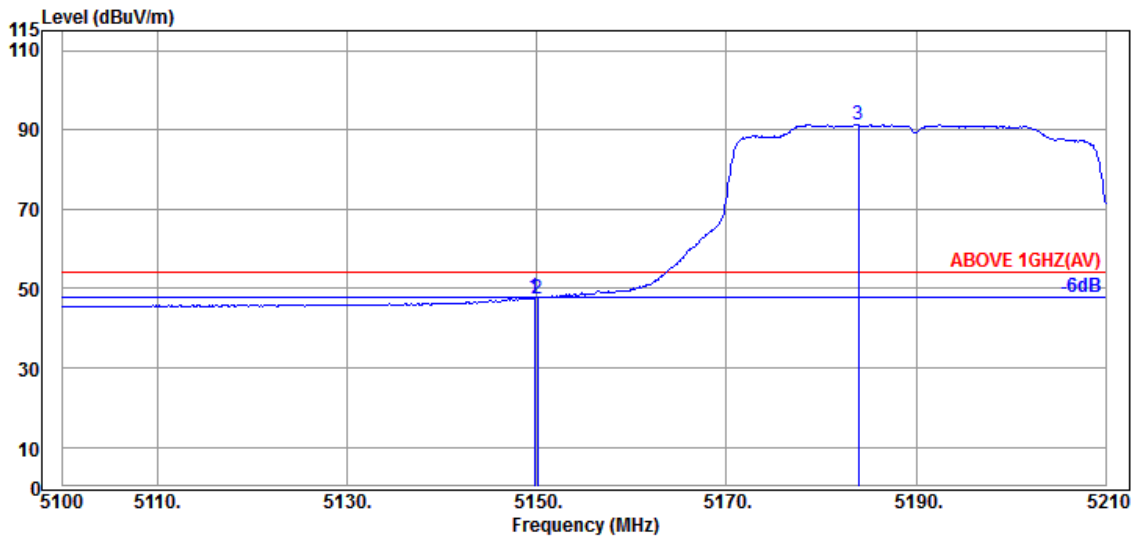


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720 | 34.50 | 8.88 | 34.34 | 38.60 | 47.64 | 54.00 | 6.36 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 38.39 | 47.43 | 54.00 | 6.57 | Average |
| @ 5183.930 | 34.63 | 8.90 | 34.32 | 82.14 | 91.35 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| | | Frequency | TX 5310MHz |

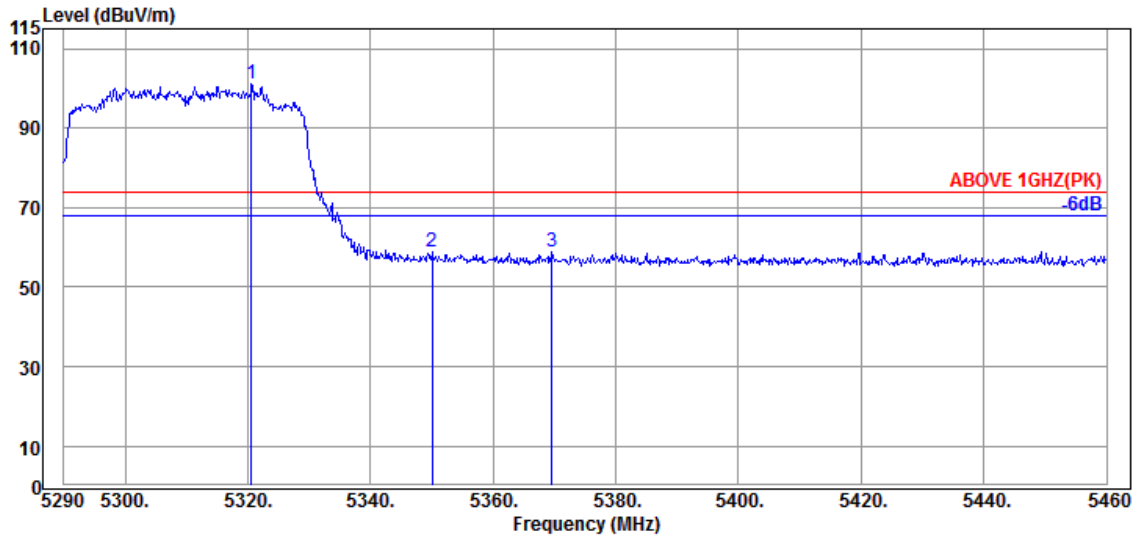

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5320.600 | 34.57 | 8.98 | 34.27 | 91.72 | 101.00 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 49.33 | 58.96 | 74.00 | 15.04 | Peak |
| 5369.560 | 34.87 | 9.00 | 34.25 | 49.32 | 58.94 | 74.00 | 15.06 | Peak |

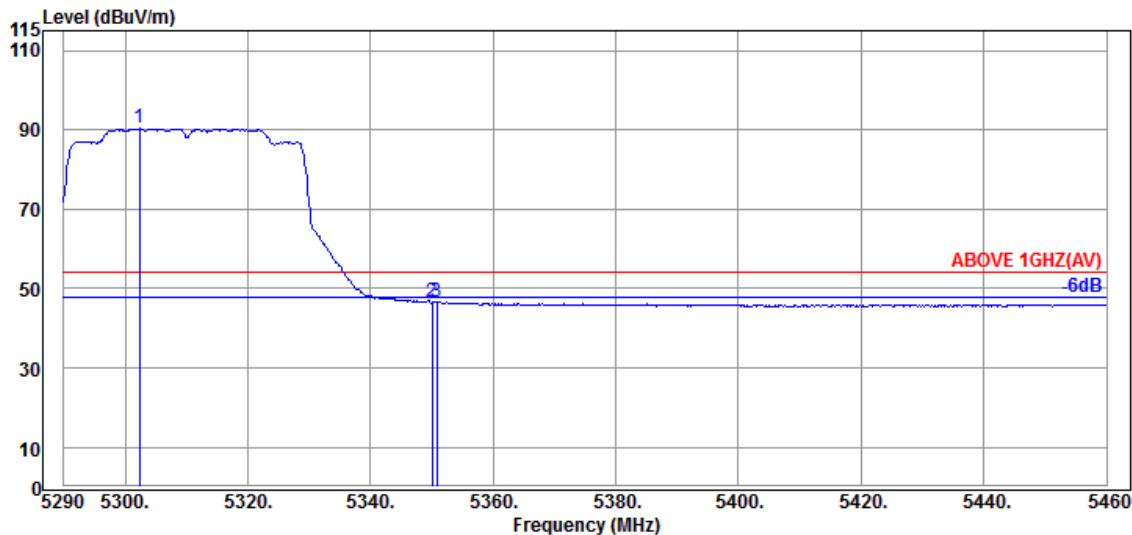


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.410 | 34.40 | 8.97 | 34.28 | 81.22 | 90.31 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 36.88 | 46.51 | 54.00 | 7.49 | Average |
| 5350.860 | 34.90 | 8.99 | 34.26 | 37.10 | 46.73 | 54.00 | 7.27 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| | | Frequency | TX 5310MHz |

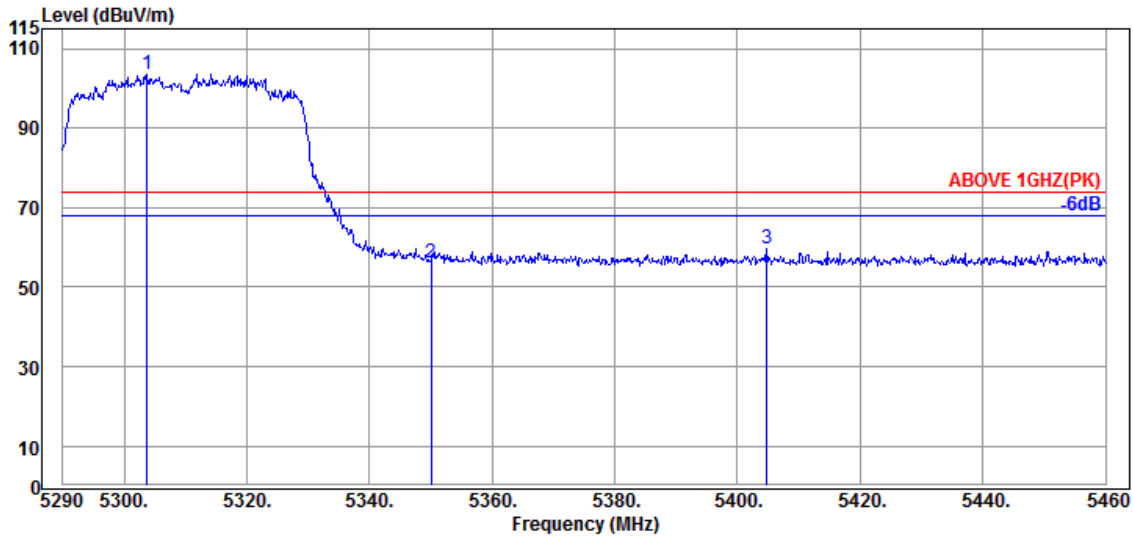

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5303.770 | 34.40 | 8.97 | 34.28 | 94.52 | 103.61 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 46.49 | 56.12 | 74.00 | 17.88 | Peak |
| 5404.750 | 34.75 | 9.03 | 34.23 | 49.98 | 59.53 | 74.00 | 14.47 | Peak |

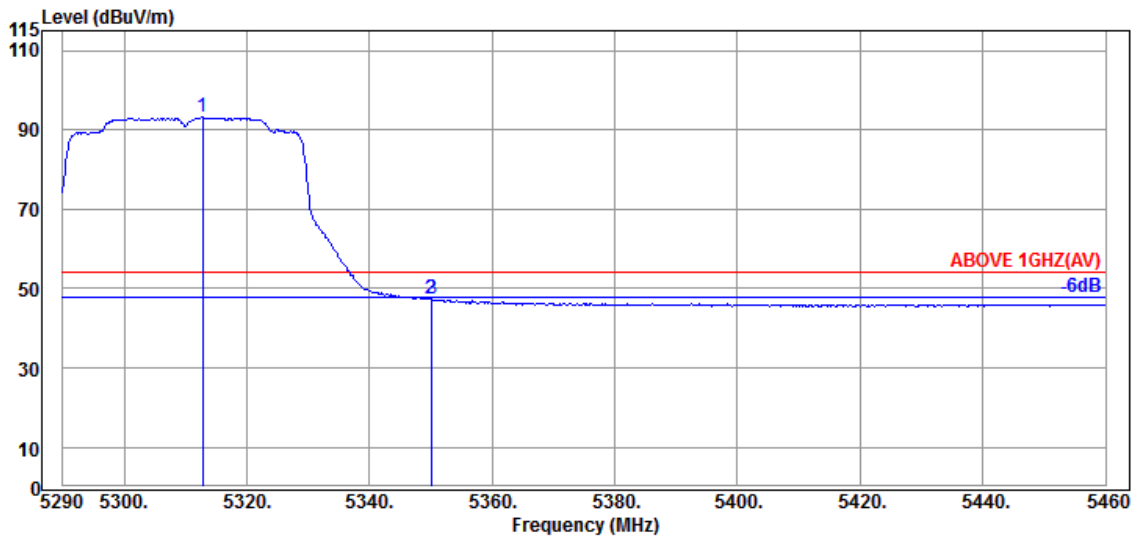


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5312.780 | 34.57 | 8.98 | 34.27 | 83.90 | 93.18 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 37.75 | 47.38 | 54.00 | 6.62 | Average |
| 5350.180 | 34.90 | 8.99 | 34.26 | 37.75 | 47.38 | 54.00 | 6.62 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

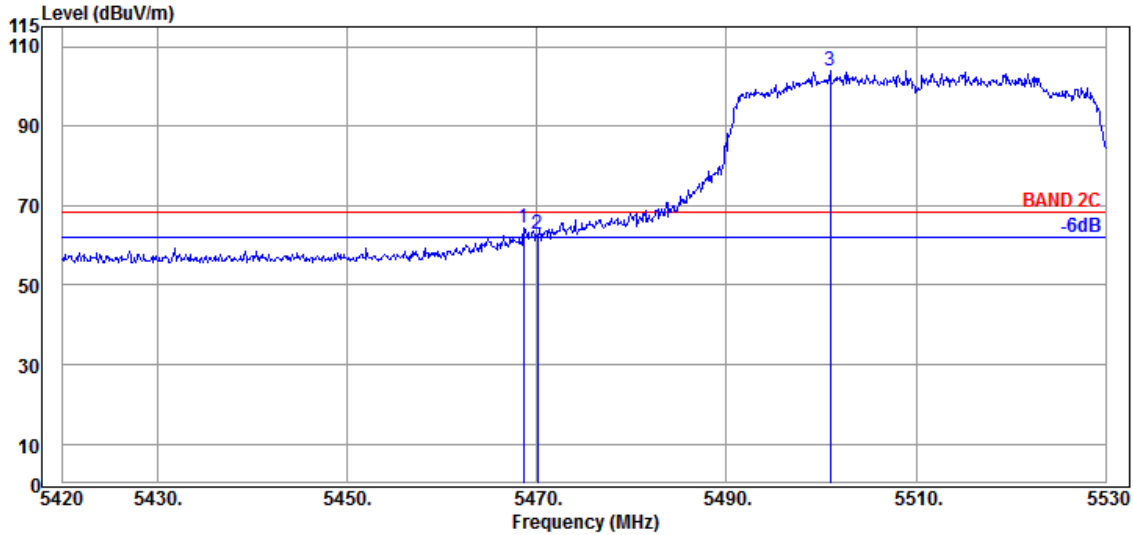

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.620 | 34.63 | 9.06 | 34.21 | 55.07 | 64.55 | 68.20 | 3.65 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 53.20 | 62.68 | 68.20 | 5.52 | Peak |
| @ 5500.960 | 34.70 | 9.08 | 34.20 | 94.38 | 103.96 | --- | --- | Peak |

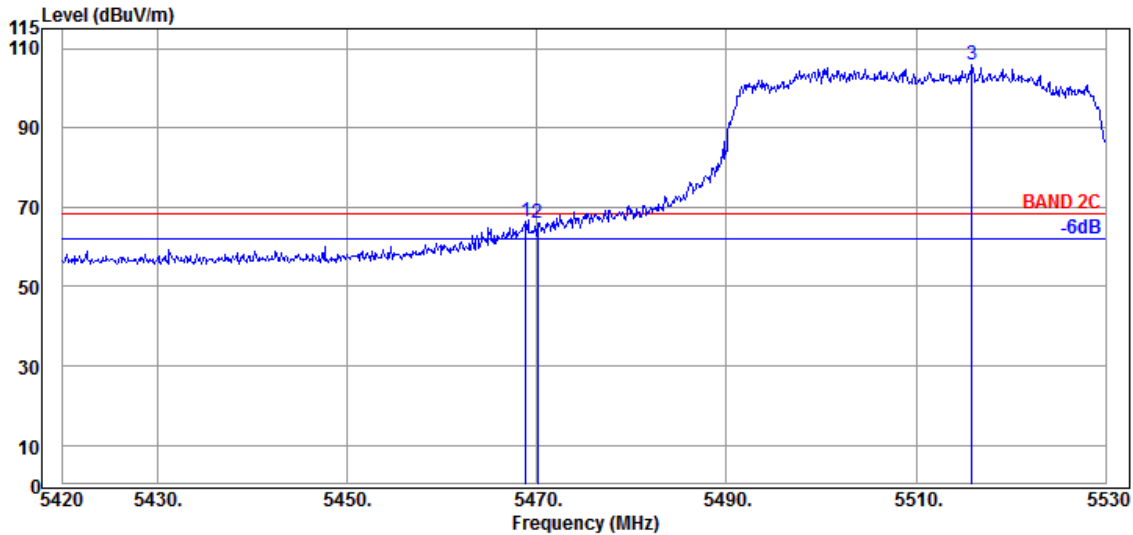


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.840 | 34.63 | 9.06 | 34.21 | 56.73 | 66.21 | 68.20 | 1.99 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 56.35 | 65.83 | 68.20 | 2.37 | Peak |
| @ 5515.920 | 34.70 | 9.09 | 34.21 | 96.46 | 106.04 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

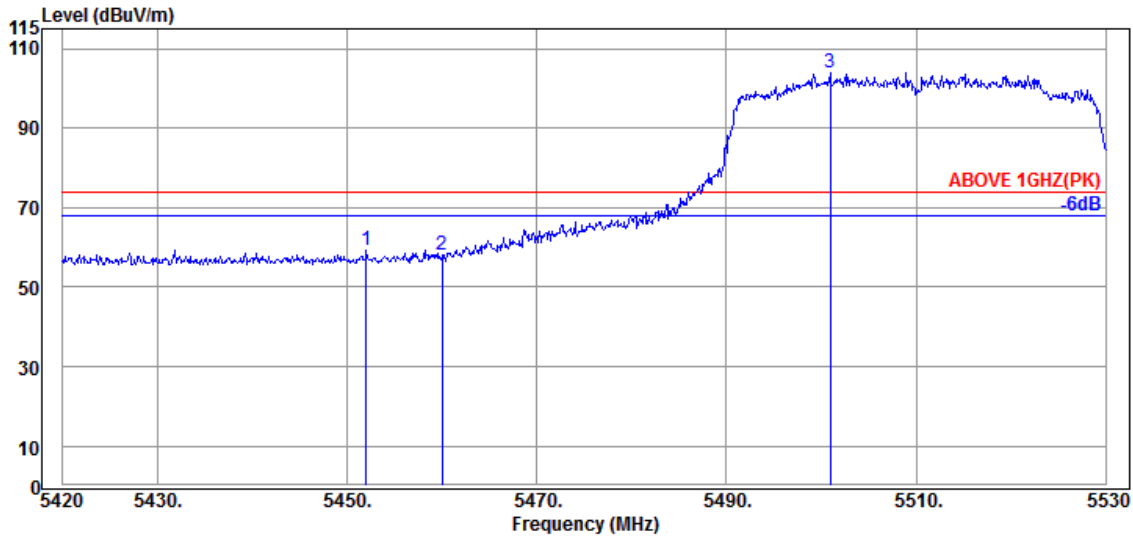

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5452.010 | 34.60 | 9.05 | 34.21 | 49.99 | 59.43 | 74.00 | 14.57 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 48.61 | 58.05 | 74.00 | 15.95 | Peak |
| @ 5500.960 | 34.70 | 9.08 | 34.20 | 94.38 | 103.96 | --- | --- | Peak |

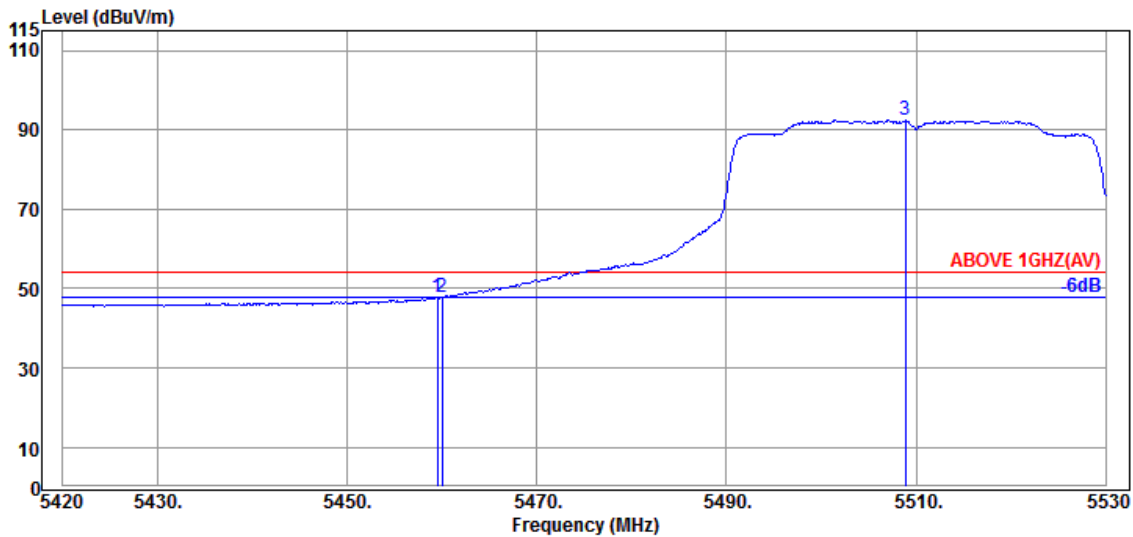


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.490 | 34.60 | 9.05 | 34.21 | 38.27 | 47.71 | 54.00 | 6.29 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 38.19 | 47.63 | 54.00 | 6.37 | Average |
| @ 5508.880 | 34.70 | 9.08 | 34.21 | 82.82 | 92.39 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

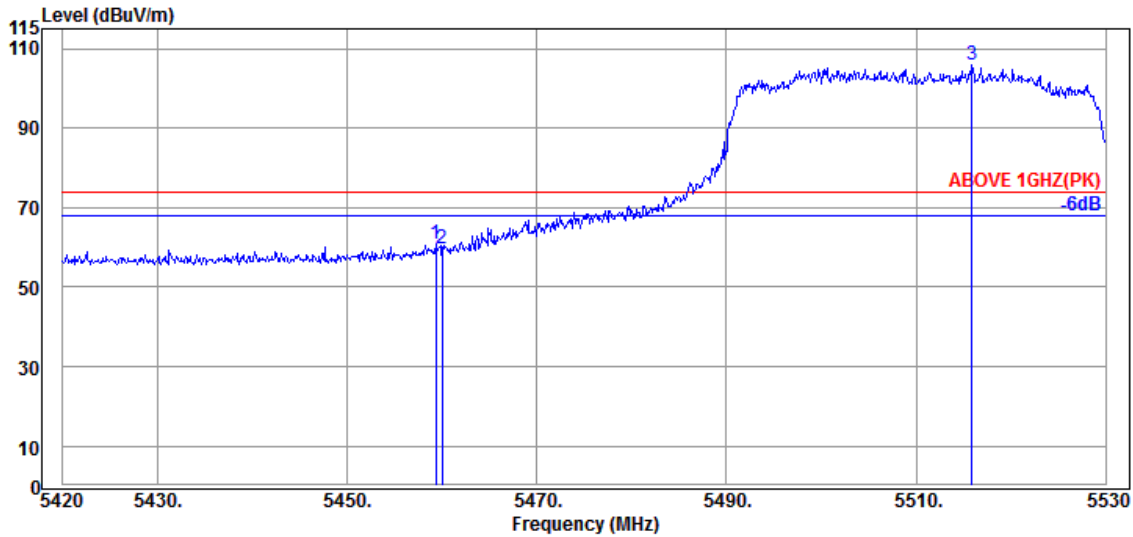

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.380 | 34.60 | 9.05 | 34.21 | 51.54 | 60.98 | 74.00 | 13.02 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 50.26 | 59.70 | 74.00 | 14.30 | Peak |
| @ 5515.920 | 34.70 | 9.09 | 34.21 | 96.46 | 106.04 | --- | --- | Peak |

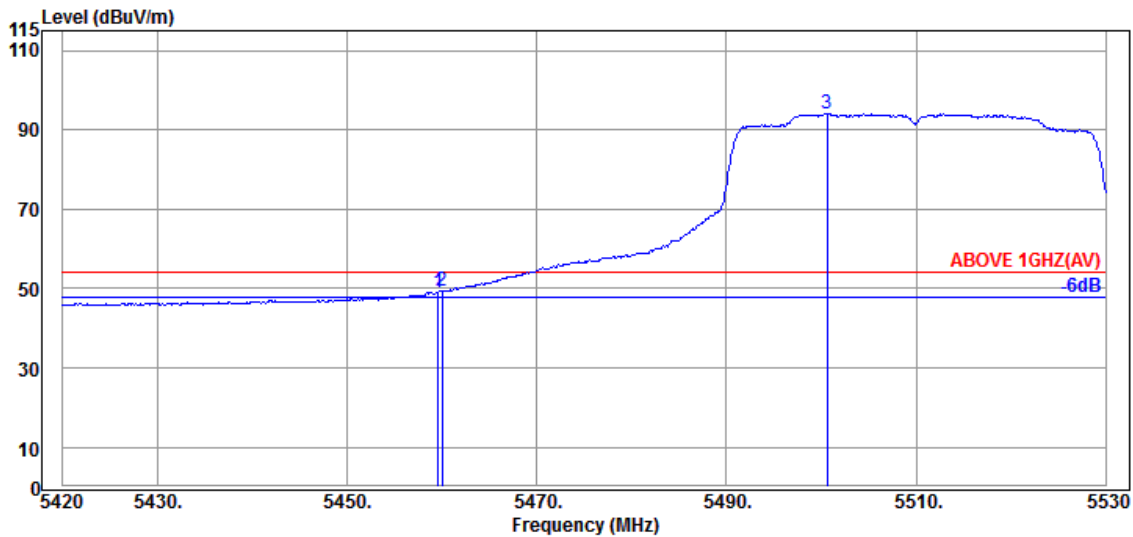


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.600 | 34.60 | 9.05 | 34.21 | 39.63 | 49.07 | 54.00 | 4.93 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 40.02 | 49.46 | 54.00 | 4.54 | Average |
| @ 5500.630 | 34.70 | 9.08 | 34.20 | 84.38 | 93.96 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5670MHz |

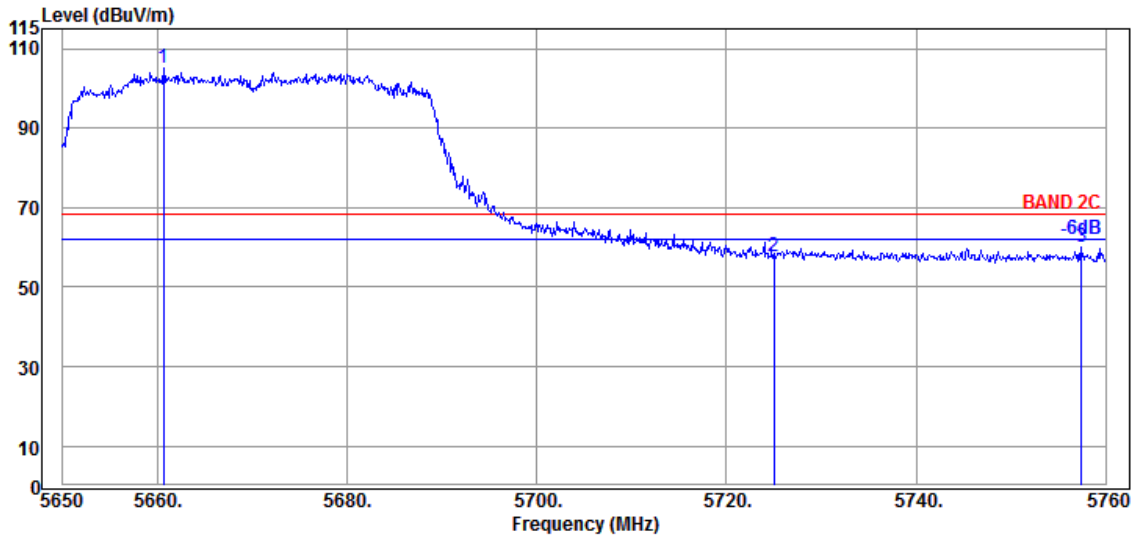

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5660.670 | 34.57 | 9.16 | 34.28 | 95.80 | 105.25 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 47.81 | 57.61 | 68.20 | 10.59 | Peak |
| 5757.470 | 35.03 | 9.21 | 34.32 | 50.24 | 60.16 | 68.20 | 8.04 | Peak |

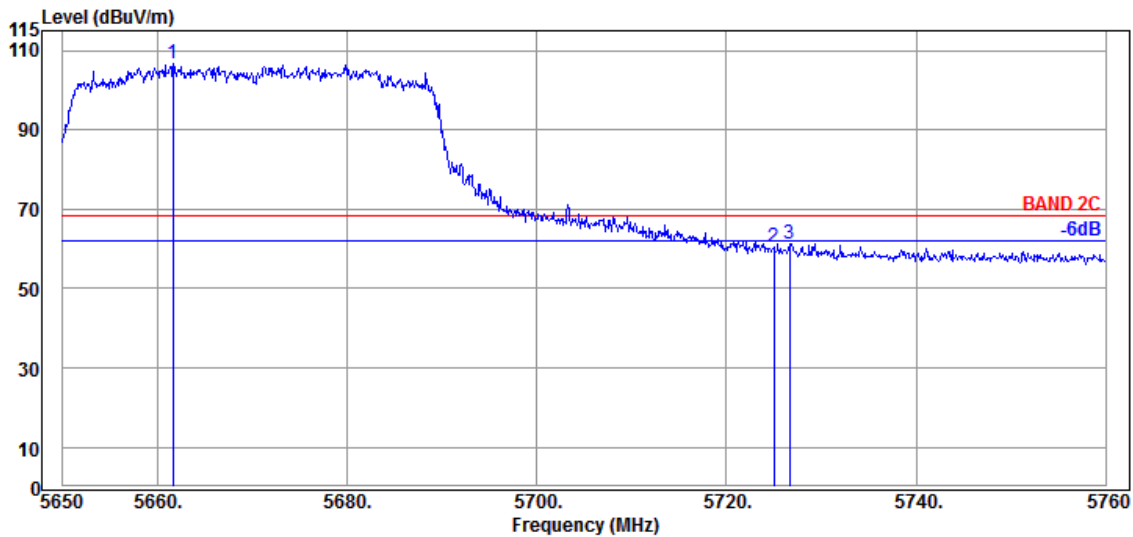


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5661.660 | 34.57 | 9.16 | 34.28 | 97.24 | 106.69 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 50.54 | 60.34 | 68.20 | 7.86 | Peak |
| 5726.670 | 34.90 | 9.20 | 34.31 | 51.54 | 61.33 | 68.20 | 6.87 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

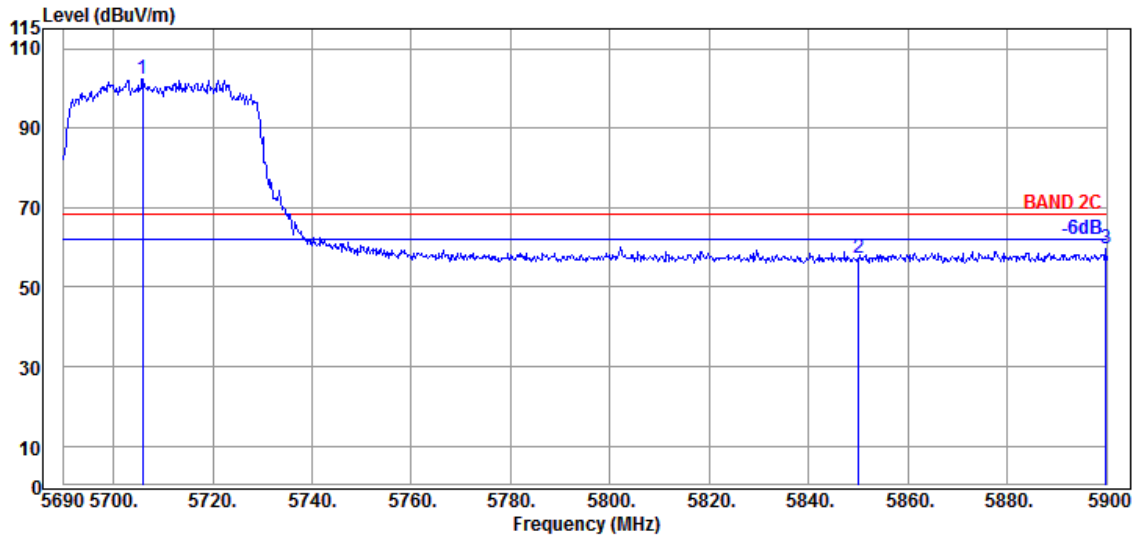

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5705.960 | 34.80 | 9.19 | 34.29 | 92.84 | 102.54 | --- | --- | Peak |
| 5850.020 | 35.40 | 9.25 | 34.36 | 47.08 | 57.37 | 68.20 | 10.83 | Peak |
| 5899.790 | 35.80 | 9.28 | 34.39 | 48.92 | 59.61 | 68.20 | 8.59 | Peak |

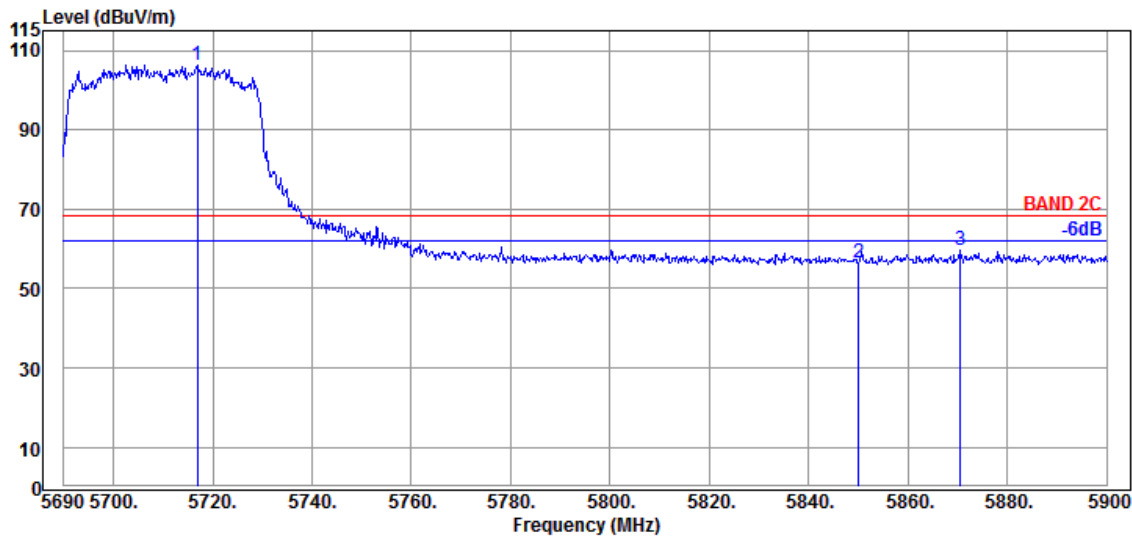


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5716.880 | 34.80 | 9.19 | 34.30 | 96.78 | 106.47 | --- | --- | Peak |
| 5850.020 | 35.40 | 9.25 | 34.36 | 46.28 | 56.57 | 68.20 | 11.63 | Peak |
| 5870.600 | 35.53 | 9.26 | 34.37 | 49.28 | 59.70 | 68.20 | 8.50 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

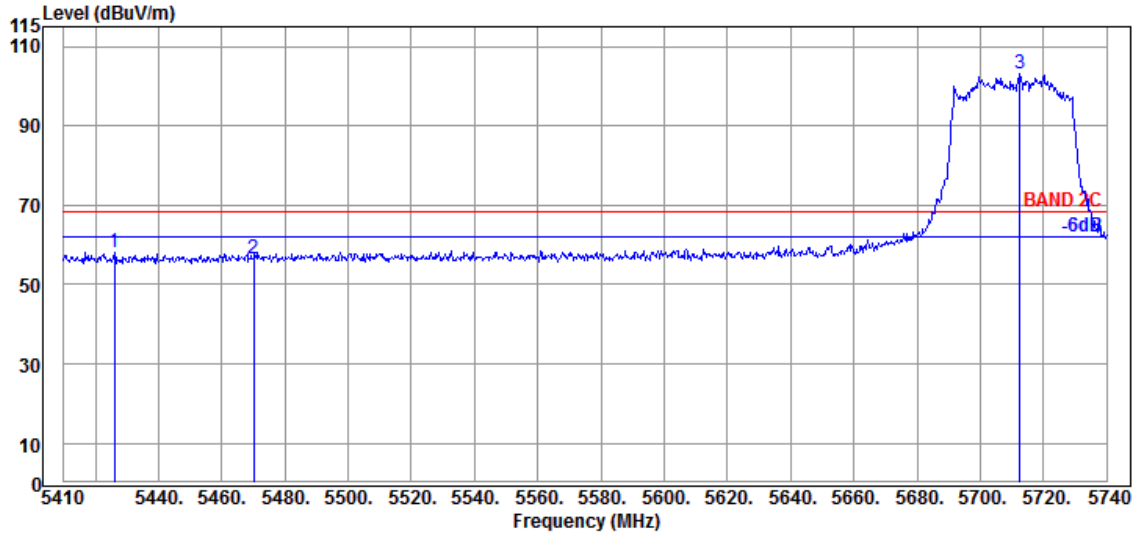

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5426.170 | 34.70 | 9.04 | 34.23 | 48.69 | 58.20 | 68.20 | 10.00 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 47.21 | 56.69 | 68.20 | 11.51 | Peak |
| @ 5712.610 | 34.80 | 9.19 | 34.30 | 93.31 | 103.00 | --- | --- | Peak |

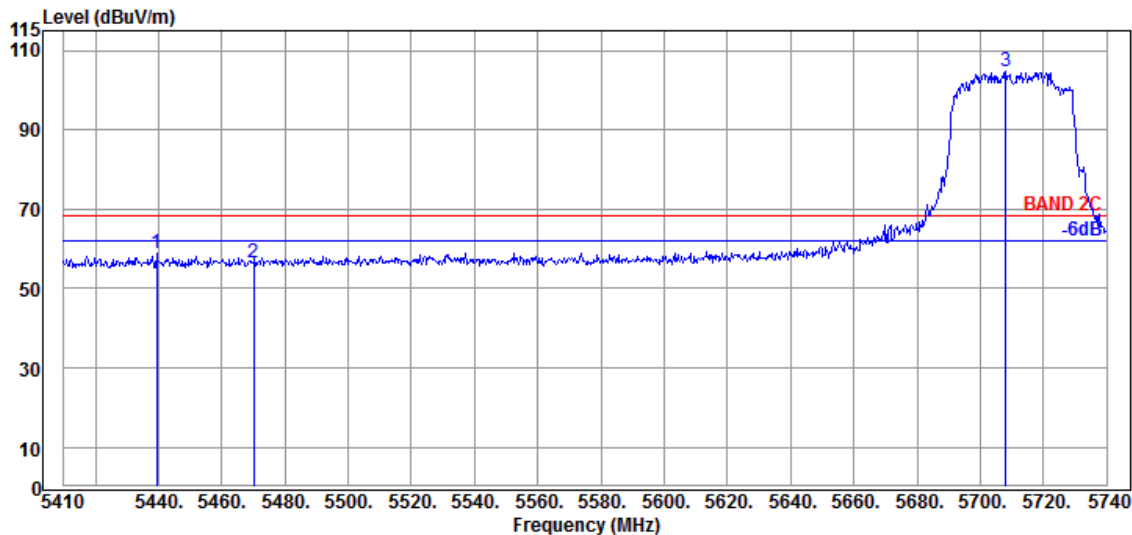


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5439.370 | 34.65 | 9.04 | 34.22 | 49.24 | 58.71 | 68.20 | 9.49 | Average |
| 5470.060 | 34.63 | 9.06 | 34.21 | 47.10 | 56.58 | 68.20 | 11.62 | Average |
| @ 5707.990 | 34.80 | 9.19 | 34.30 | 94.98 | 104.67 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

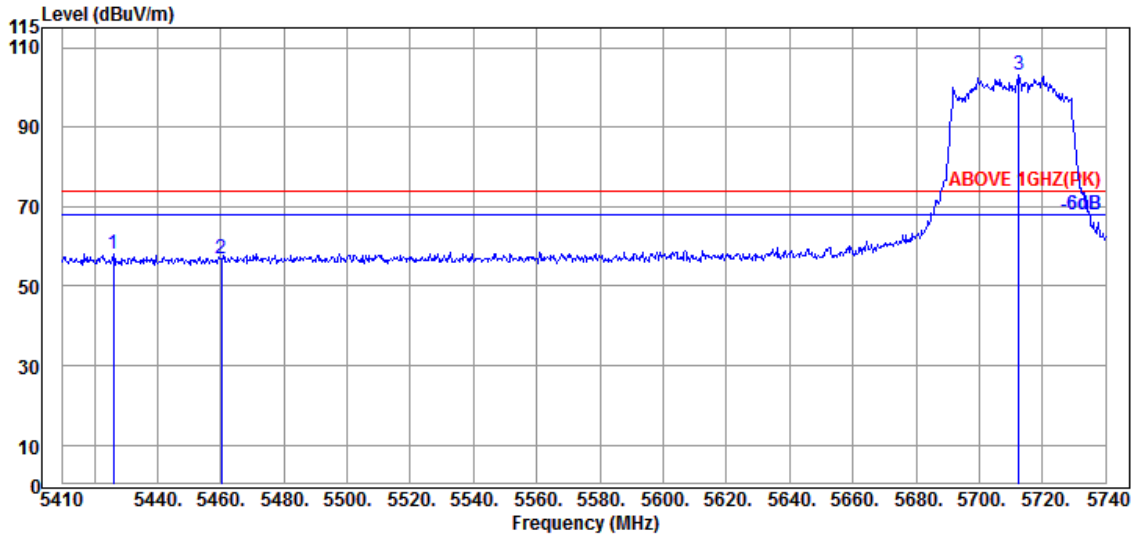

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5426.170 | 34.70 | 9.04 | 34.23 | 48.69 | 58.20 | 74.00 | 15.80 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 47.42 | 56.86 | 74.00 | 17.14 | Peak |
| @ 5712.610 | 34.80 | 9.19 | 34.30 | 93.31 | 103.00 | --- | --- | Peak |

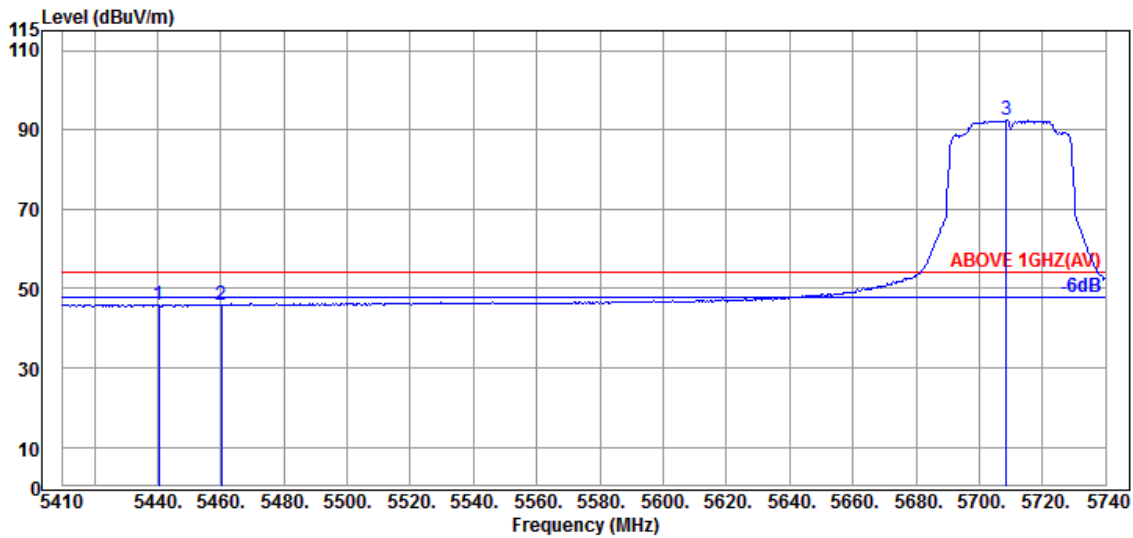


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5440.360 | 34.65 | 9.04 | 34.22 | 36.54 | 46.01 | 54.00 | 7.99 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.30 | 45.74 | 54.00 | 8.26 | Average |
| @ 5708.650 | 34.80 | 9.19 | 34.30 | 82.63 | 92.32 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

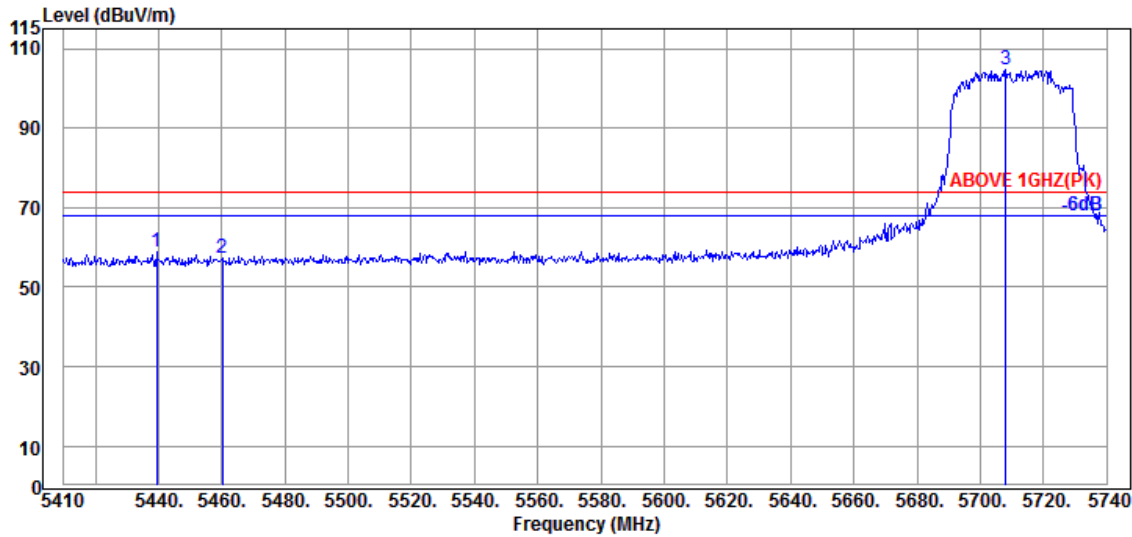

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5439.370 | 34.65 | 9.04 | 34.22 | 49.24 | 58.71 | 74.00 | 15.29 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 48.02 | 57.46 | 74.00 | 16.54 | Peak |
| @ 5707.990 | 34.80 | 9.19 | 34.30 | 94.98 | 104.67 | --- | --- | Peak |

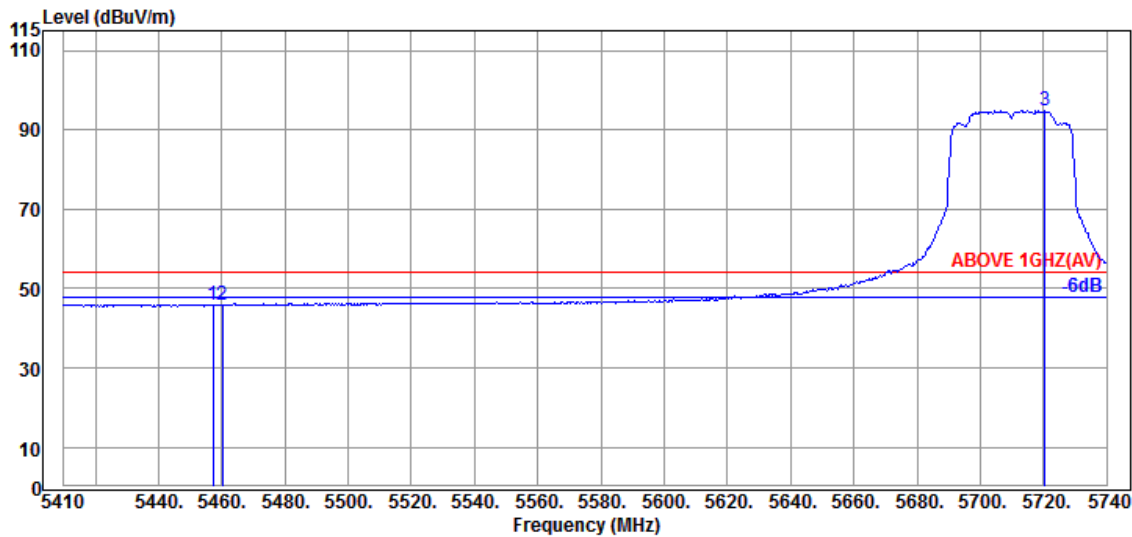


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.190 | 34.60 | 9.05 | 34.21 | 36.55 | 45.99 | 54.00 | 8.01 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.40 | 45.84 | 54.00 | 8.16 | Average |
| @ 5720.530 | 34.80 | 9.19 | 34.30 | 85.18 | 94.87 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

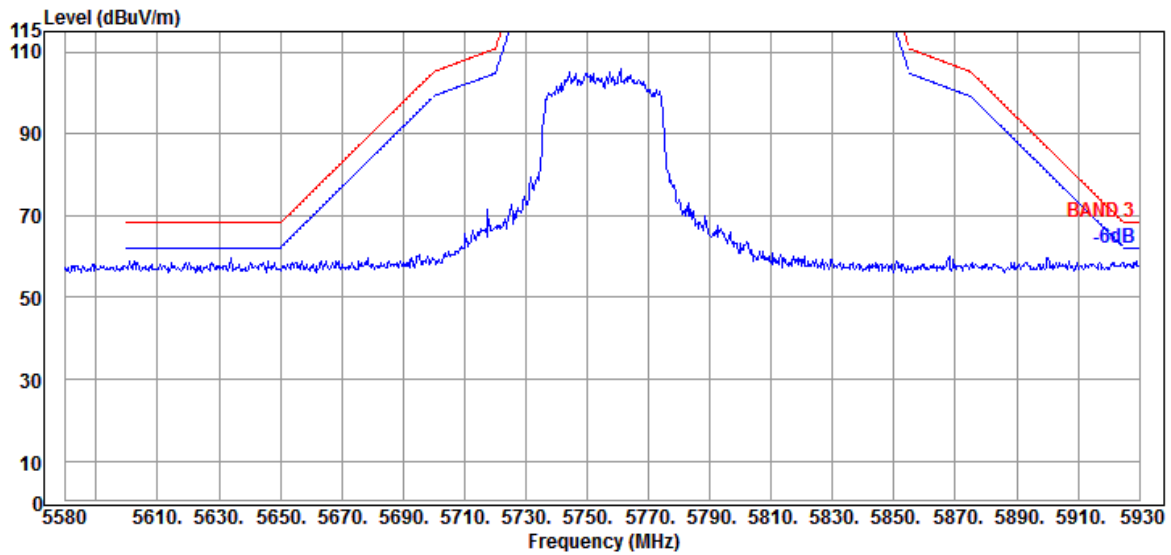


Antenna at Vertical Polarization

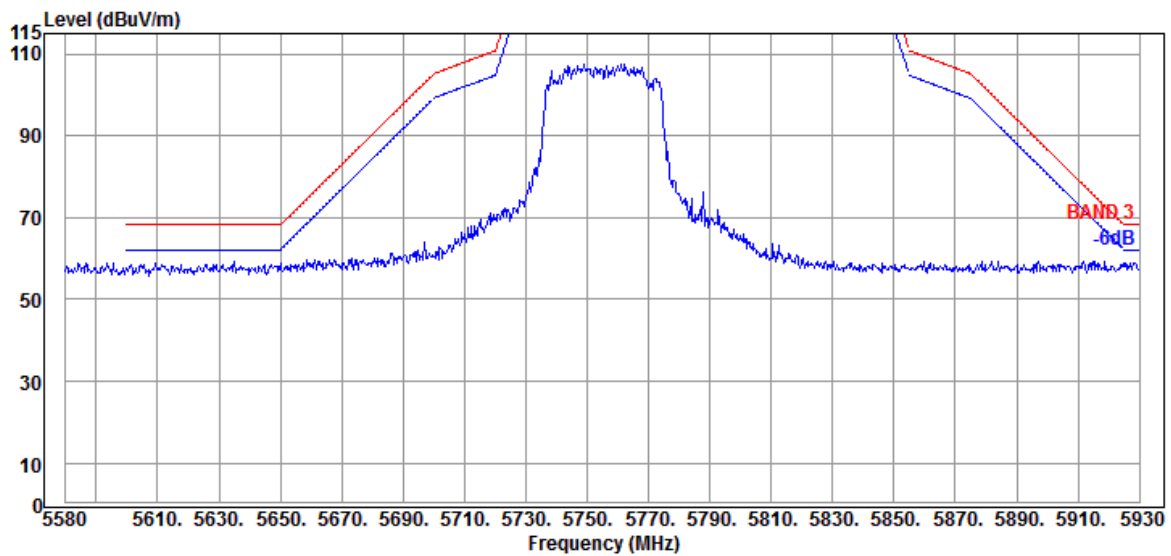


| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| | | Frequency | TX 5795MHz |


Antenna at Horizontal Polarization

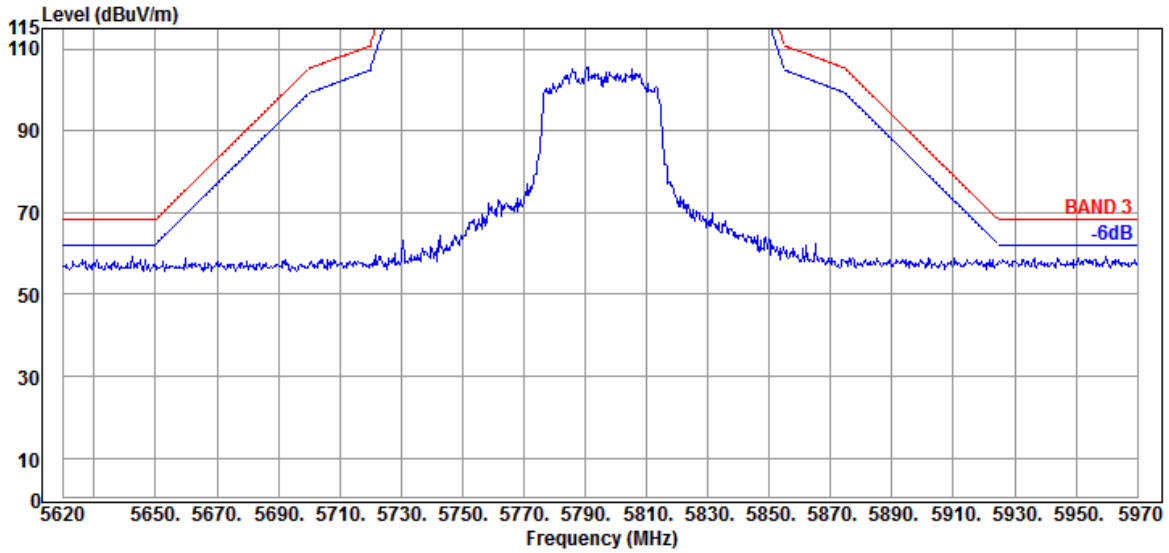

Antenna at Vertical Polarization

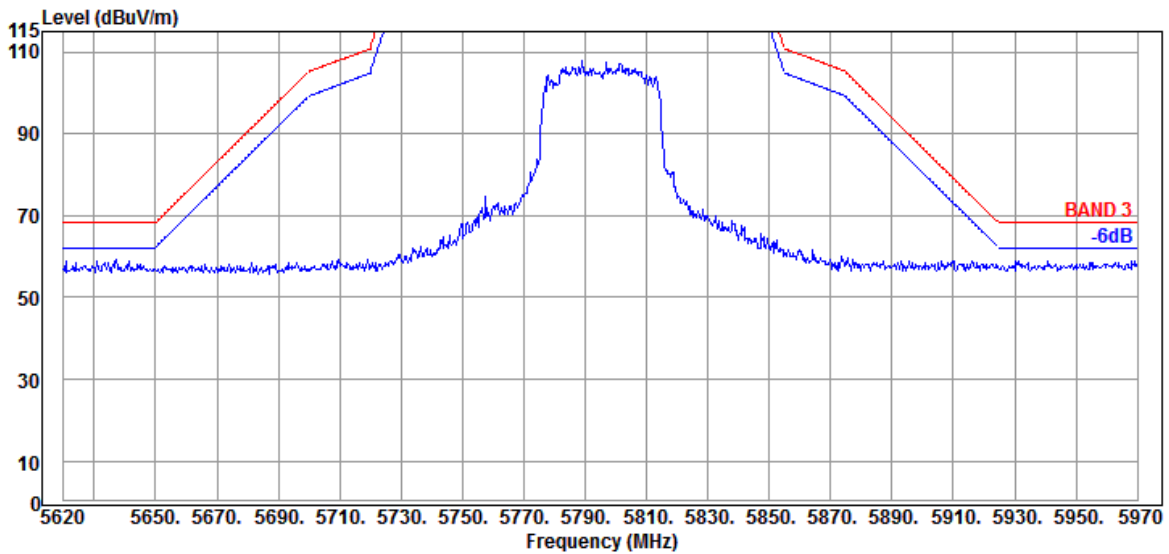


| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

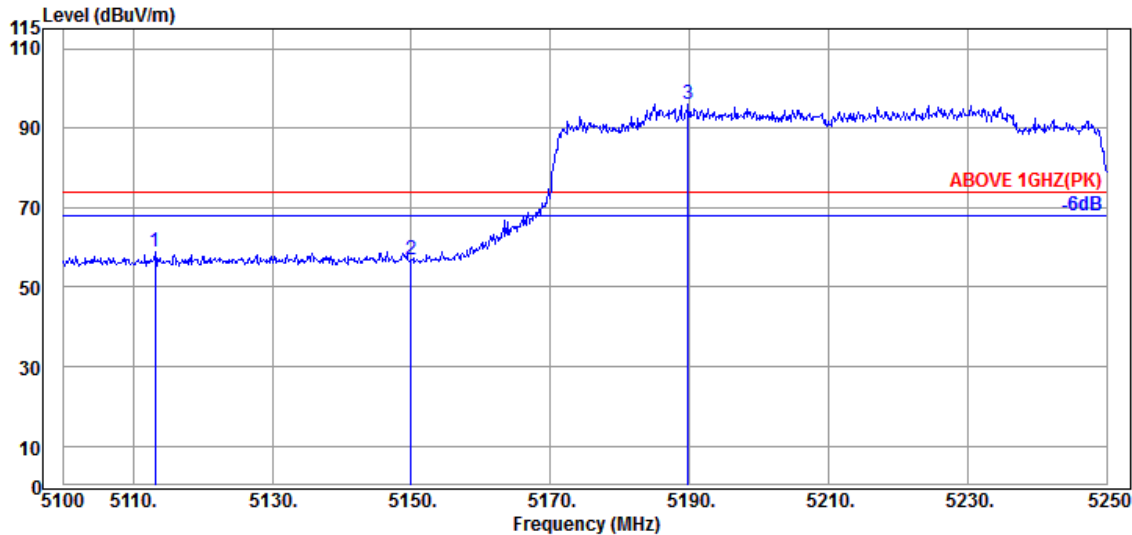

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5113.200 | 34.30 | 8.87 | 34.35 | 50.17 | 58.99 | 74.00 | 15.01 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 47.72 | 56.76 | 74.00 | 17.24 | Peak |
| @ 5189.850 | 34.70 | 8.91 | 34.32 | 86.65 | 95.94 | --- | --- | Peak |

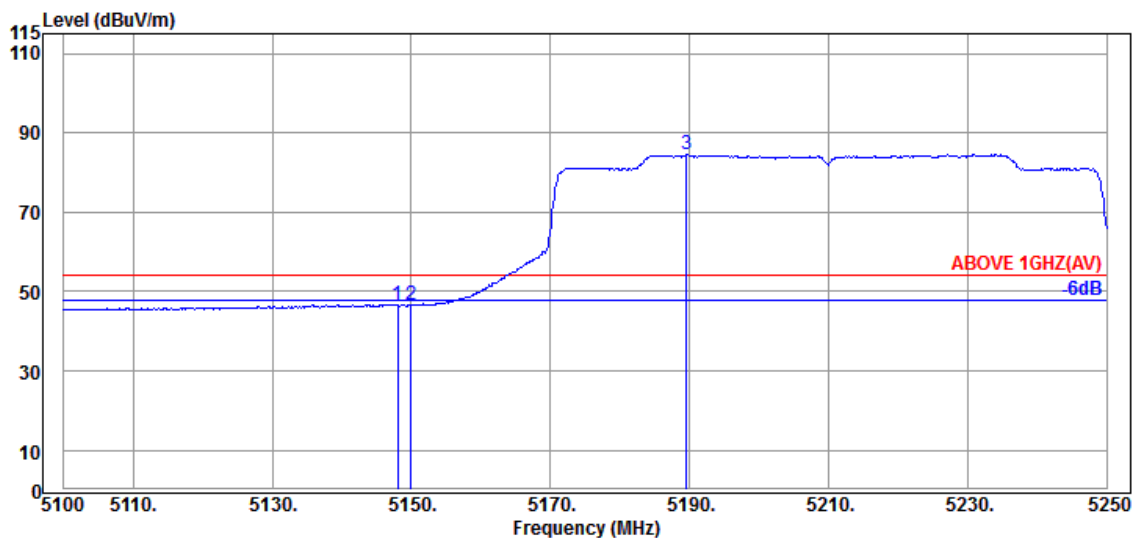


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.000 | 34.50 | 8.88 | 34.34 | 37.70 | 46.74 | 54.00 | 7.26 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 37.42 | 46.46 | 54.00 | 7.54 | Average |
| @ 5189.550 | 34.70 | 8.91 | 34.32 | 75.23 | 84.52 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

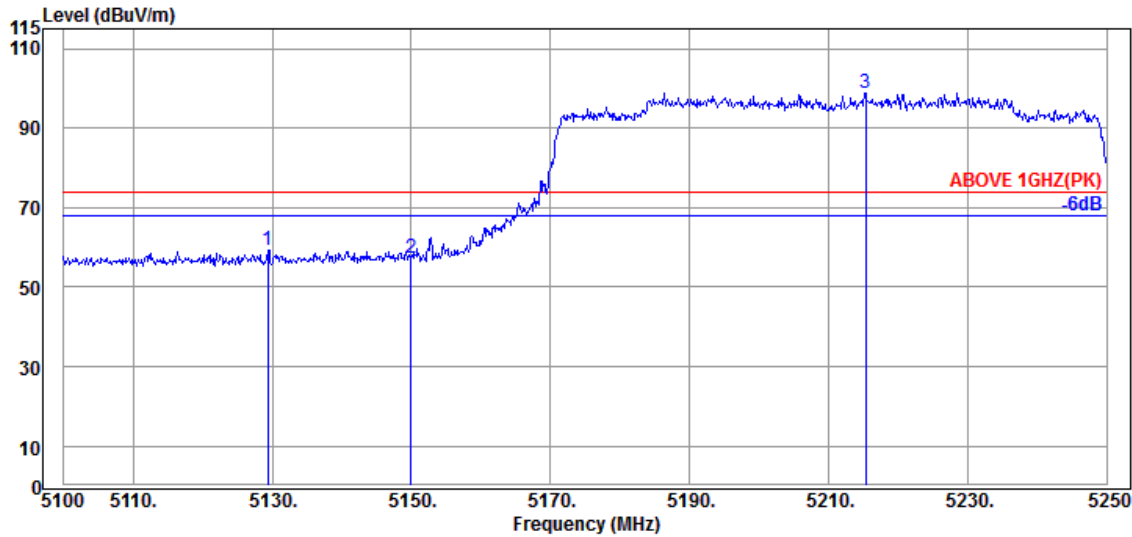

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5129.400 | 34.40 | 8.88 | 34.34 | 50.50 | 59.44 | 74.00 | 14.56 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 48.08 | 57.12 | 74.00 | 16.88 | Peak |
| @ 5215.350 | 34.65 | 8.92 | 34.31 | 89.54 | 98.80 | --- | --- | Peak |

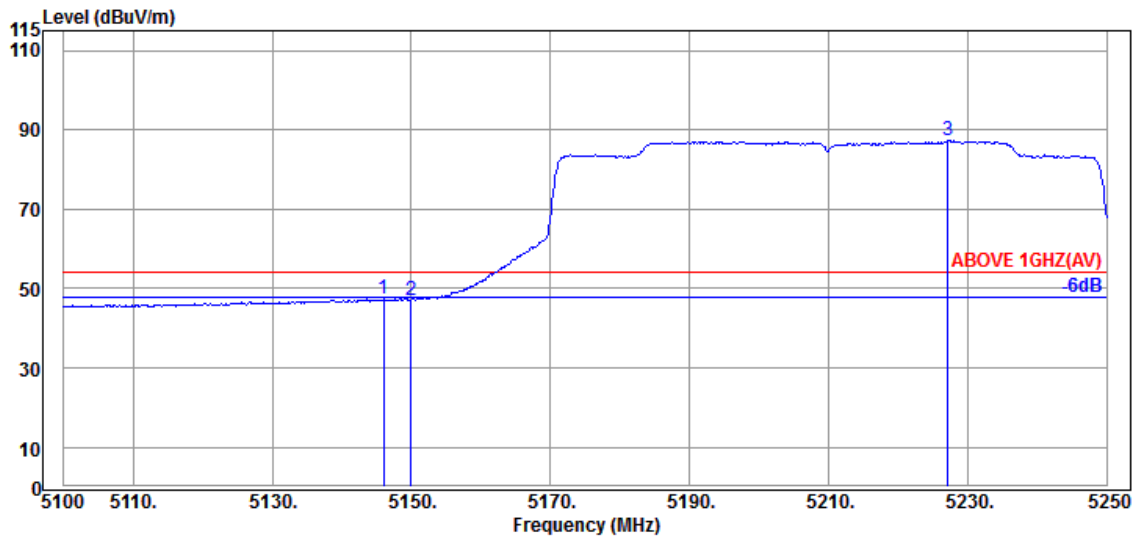


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.050 | 34.50 | 8.88 | 34.34 | 38.31 | 47.35 | 54.00 | 6.65 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 38.12 | 47.16 | 54.00 | 6.84 | Average |
| @ 5227.200 | 34.60 | 8.93 | 34.30 | 78.09 | 87.32 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

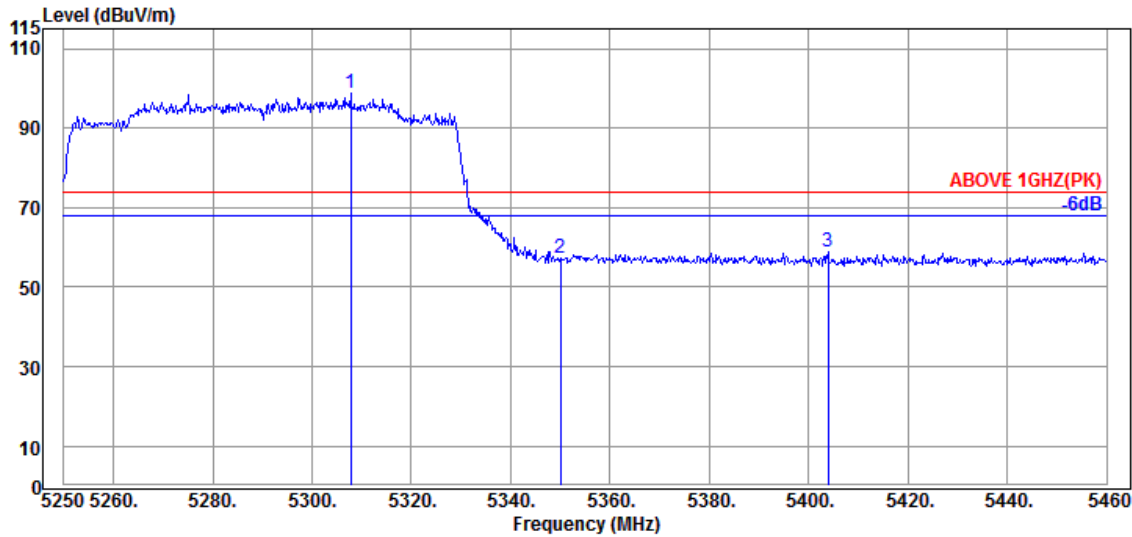

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5307.750 | 34.40 | 8.97 | 34.28 | 89.57 | 98.66 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 47.62 | 57.25 | 74.00 | 16.75 | Peak |
| 5403.930 | 34.75 | 9.03 | 34.23 | 49.24 | 58.79 | 74.00 | 15.21 | Peak |

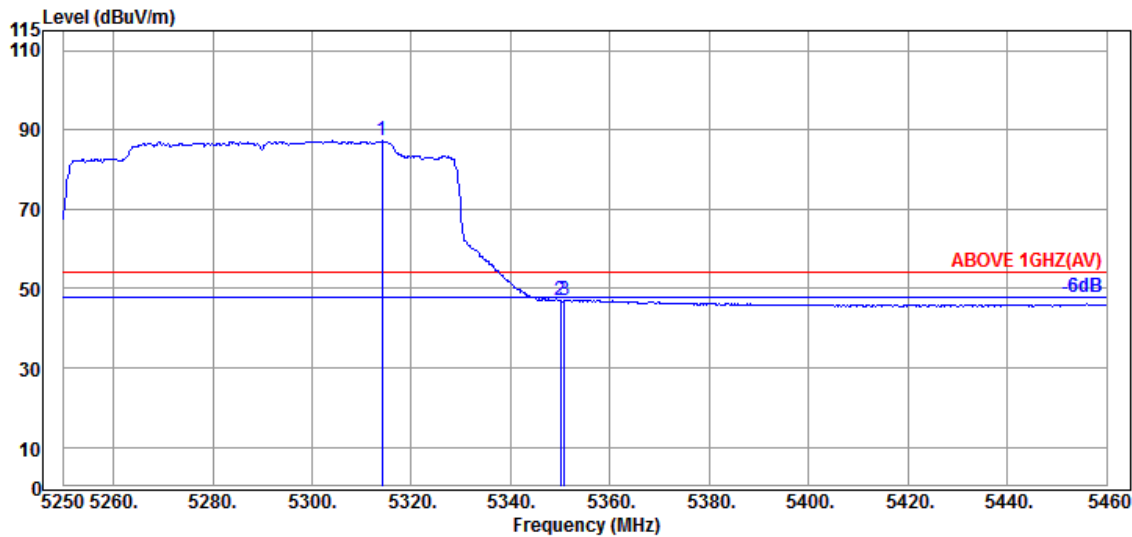


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5314.050 | 34.57 | 8.98 | 34.27 | 78.00 | 87.28 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 37.25 | 46.88 | 54.00 | 7.12 | Average |
| 5350.800 | 34.90 | 8.99 | 34.26 | 37.53 | 47.16 | 54.00 | 6.84 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

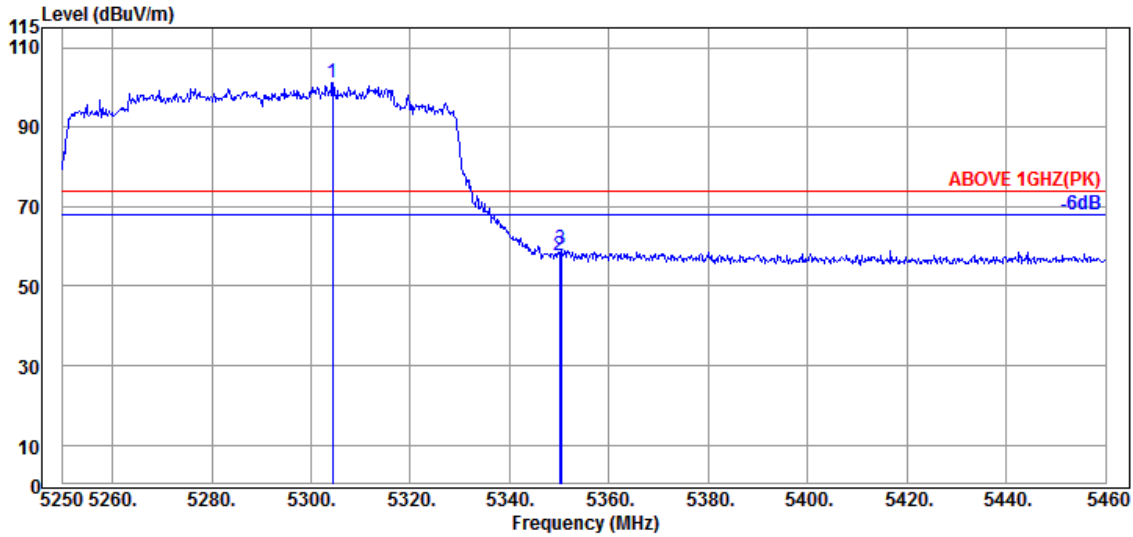

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5304.390 | 34.40 | 8.97 | 34.28 | 92.27 | 101.36 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 48.09 | 57.72 | 74.00 | 16.28 | Peak |
| 5350.380 | 34.90 | 8.99 | 34.26 | 49.76 | 59.39 | 74.00 | 14.61 | Peak |

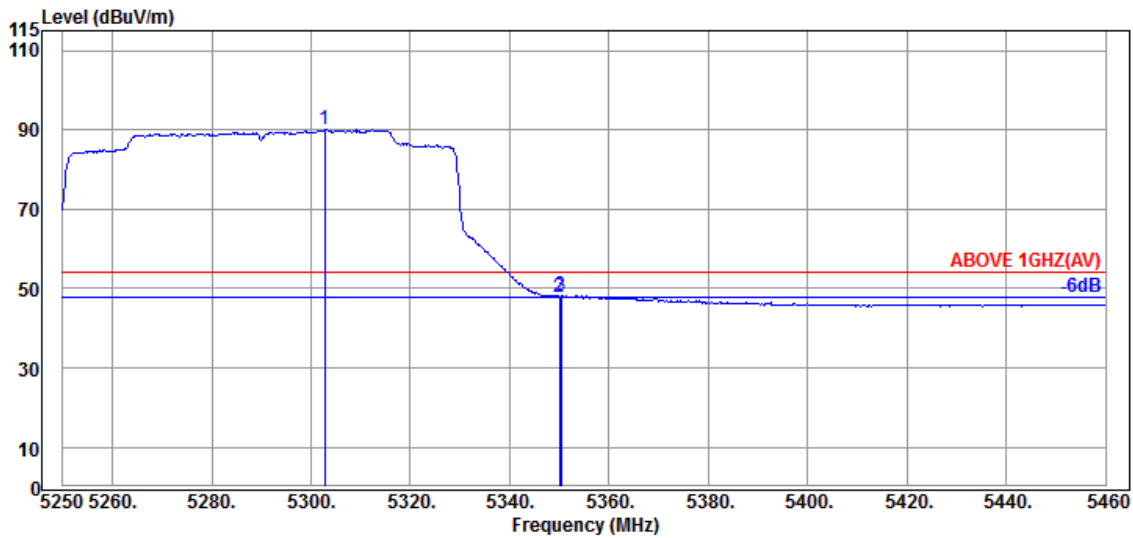


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.710 | 34.40 | 8.97 | 34.28 | 80.92 | 90.01 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 38.23 | 47.86 | 54.00 | 6.14 | Average |
| 5350.380 | 34.90 | 8.99 | 34.26 | 38.62 | 48.25 | 54.00 | 5.75 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5530MHz |

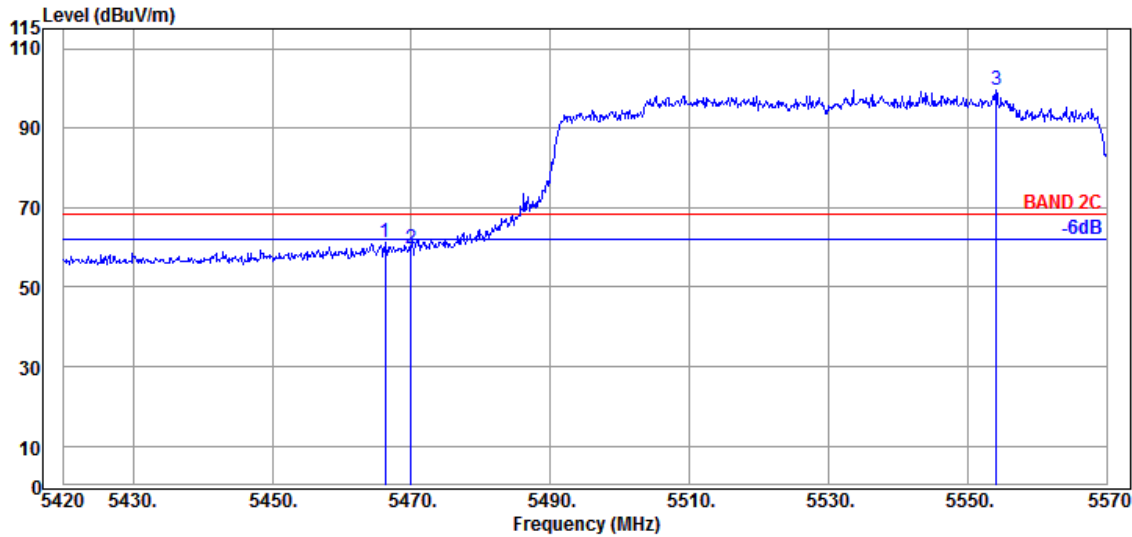

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.200 | 34.63 | 9.06 | 34.21 | 51.71 | 61.19 | 68.20 | 7.01 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 50.18 | 59.66 | 68.20 | 8.54 | Peak |
| @ 5554.100 | 34.70 | 9.10 | 34.23 | 90.18 | 99.75 | --- | --- | Peak |

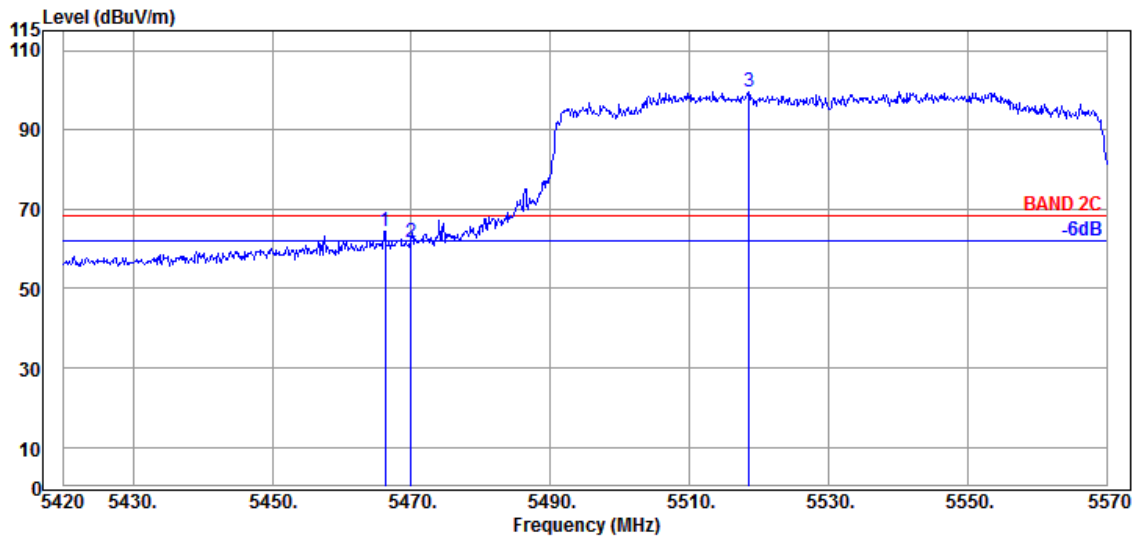


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.200 | 34.63 | 9.06 | 34.21 | 54.95 | 64.43 | 68.20 | 3.77 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 52.10 | 61.58 | 68.20 | 6.62 | Peak |
| @ 5518.550 | 34.70 | 9.09 | 34.21 | 90.00 | 99.58 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5530MHz |

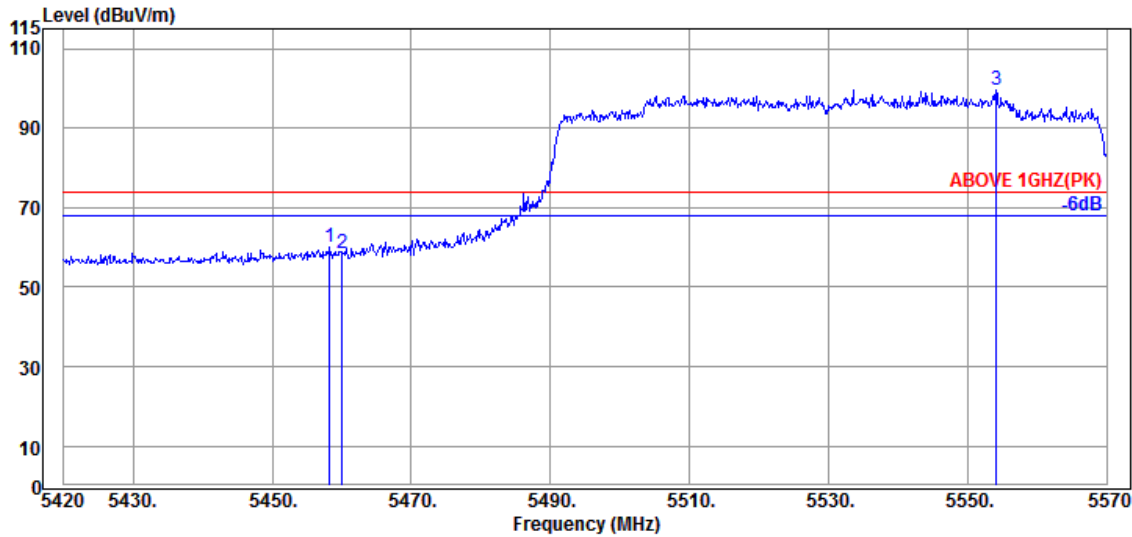

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.250 | 34.60 | 9.05 | 34.21 | 50.52 | 59.96 | 74.00 | 14.04 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 49.11 | 58.55 | 74.00 | 15.45 | Peak |
| @ 5554.100 | 34.70 | 9.10 | 34.23 | 90.18 | 99.75 | --- | --- | Peak |

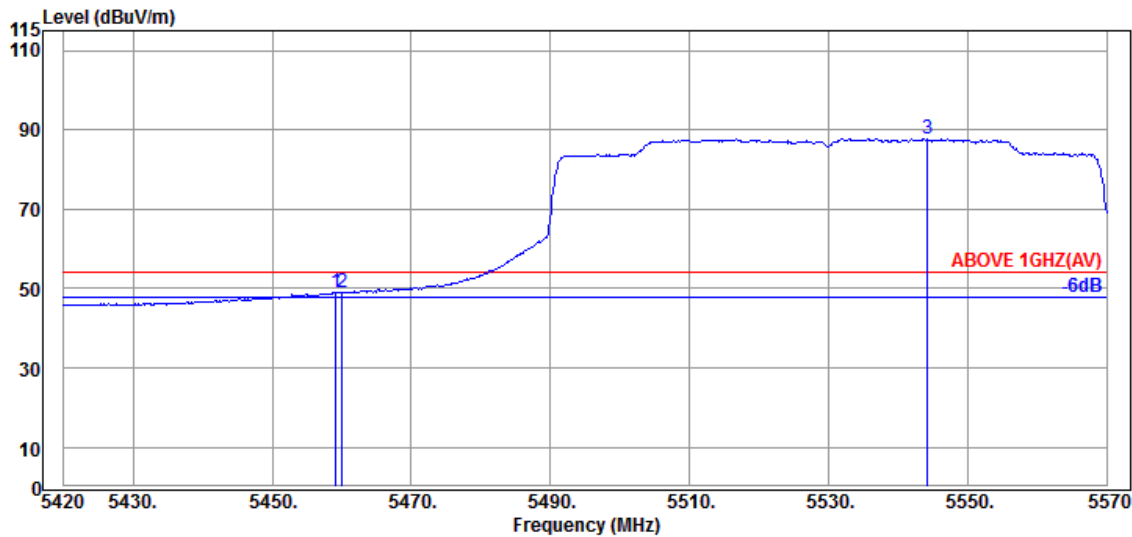


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.150 | 34.60 | 9.05 | 34.21 | 39.67 | 49.11 | 54.00 | 4.89 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 39.44 | 48.88 | 54.00 | 5.12 | Average |
| @ 5544.200 | 34.70 | 9.10 | 34.23 | 78.32 | 87.89 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5530MHz |

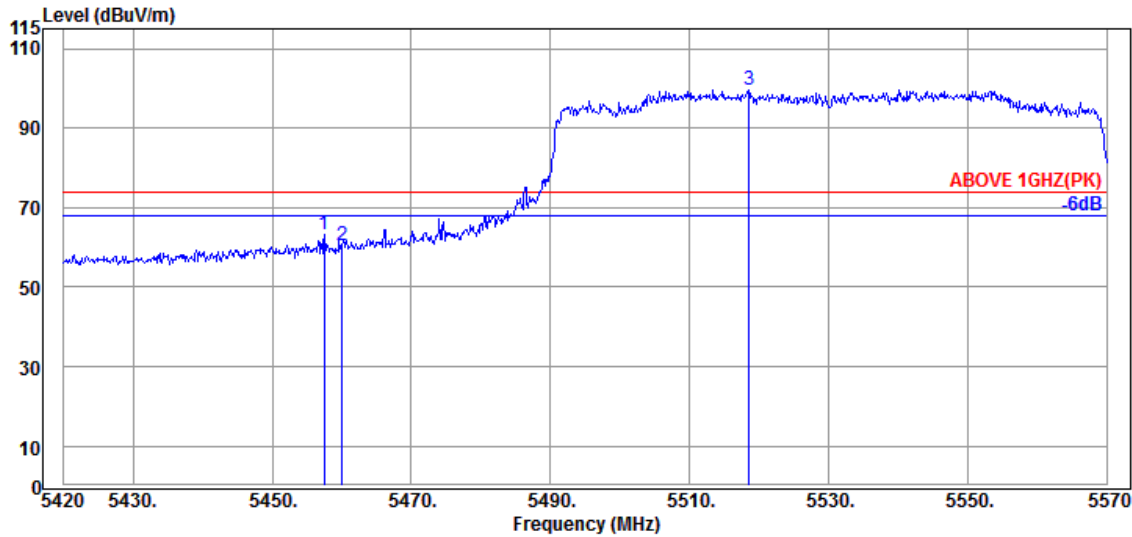

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.500 | 34.60 | 9.05 | 34.21 | 53.89 | 63.33 | 74.00 | 10.67 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 51.15 | 60.59 | 74.00 | 13.41 | Peak |
| @ 5518.550 | 34.70 | 9.09 | 34.21 | 90.00 | 99.58 | --- | --- | Peak |

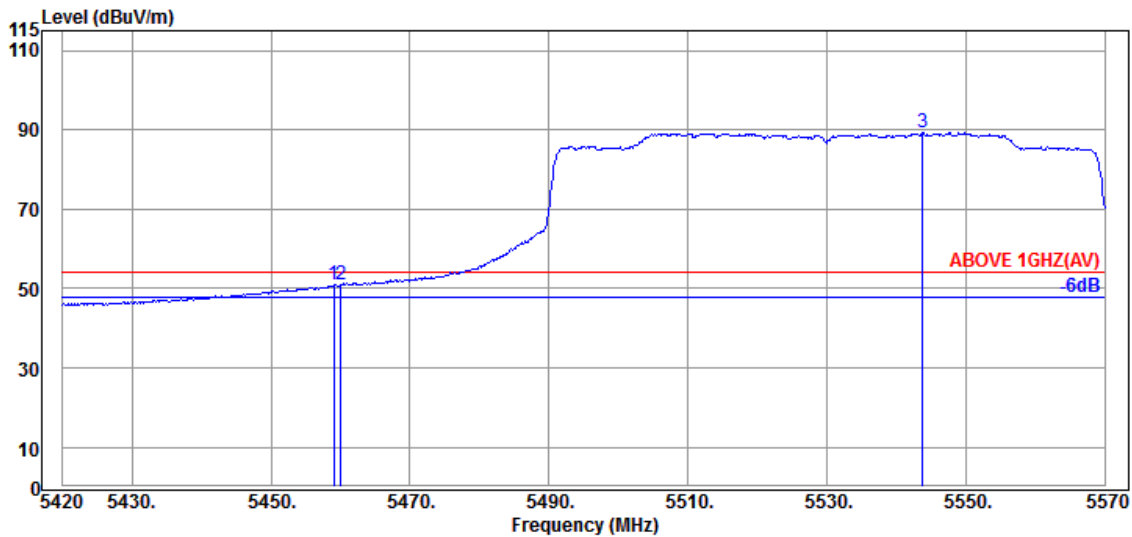


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.000 | 34.60 | 9.05 | 34.21 | 41.46 | 50.90 | 54.00 | 3.10 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 41.44 | 50.88 | 54.00 | 3.12 | Average |
| @ 5543.750 | 34.70 | 9.10 | 34.23 | 79.66 | 89.23 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

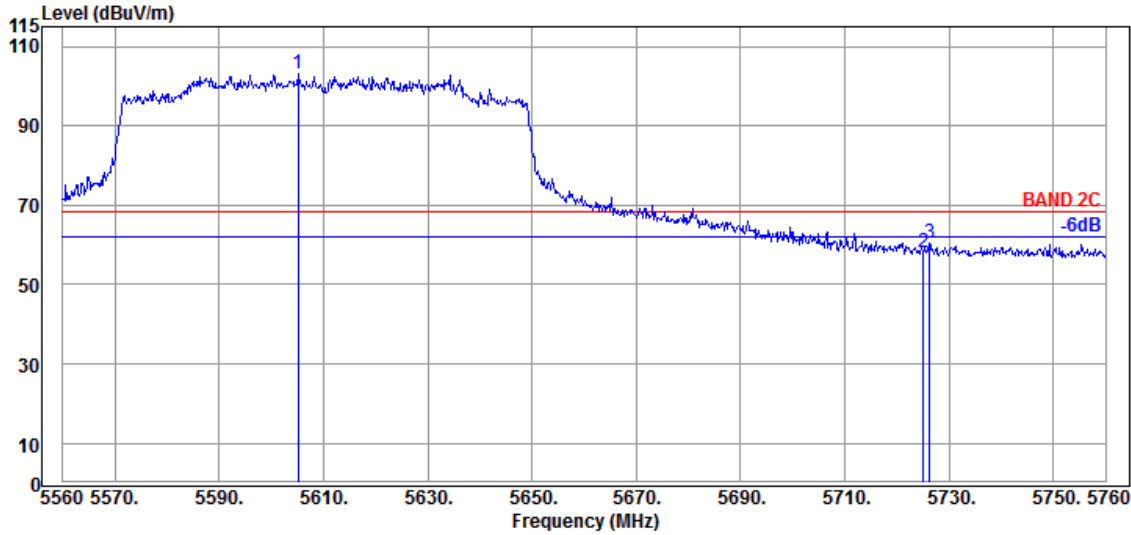

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5605.200 | 34.40 | 9.13 | 34.25 | 93.69 | 102.97 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 48.35 | 58.15 | 68.20 | 10.05 | Peak |
| 5726.200 | 34.90 | 9.20 | 34.30 | 50.63 | 60.43 | 68.20 | 7.77 | Peak |

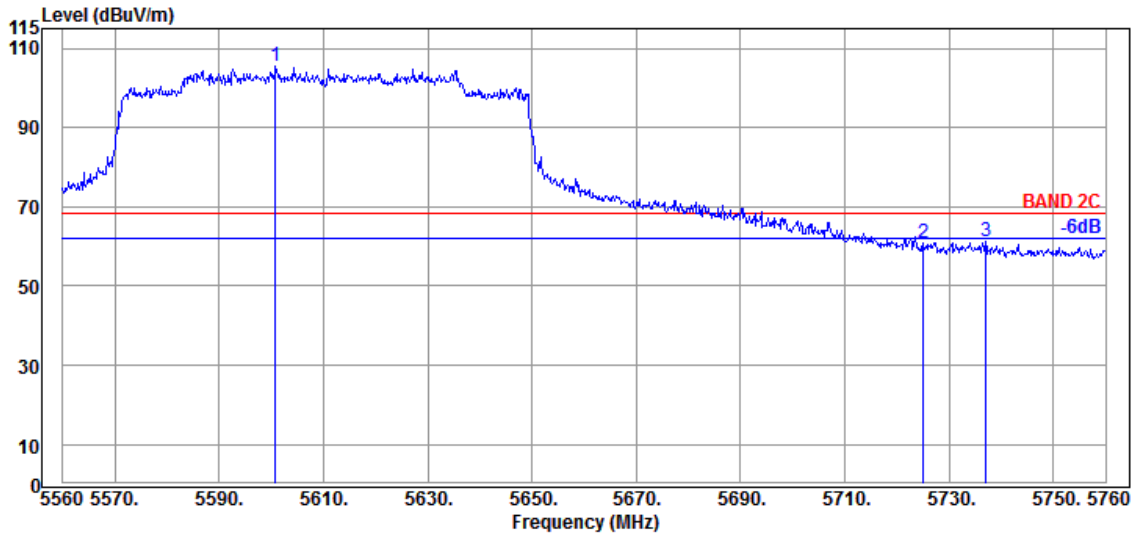


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5600.800 | 34.40 | 9.13 | 34.25 | 96.23 | 105.51 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 50.93 | 60.73 | 68.20 | 7.47 | Peak |
| 5737.000 | 34.90 | 9.20 | 34.31 | 51.54 | 61.33 | 68.20 | 6.87 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

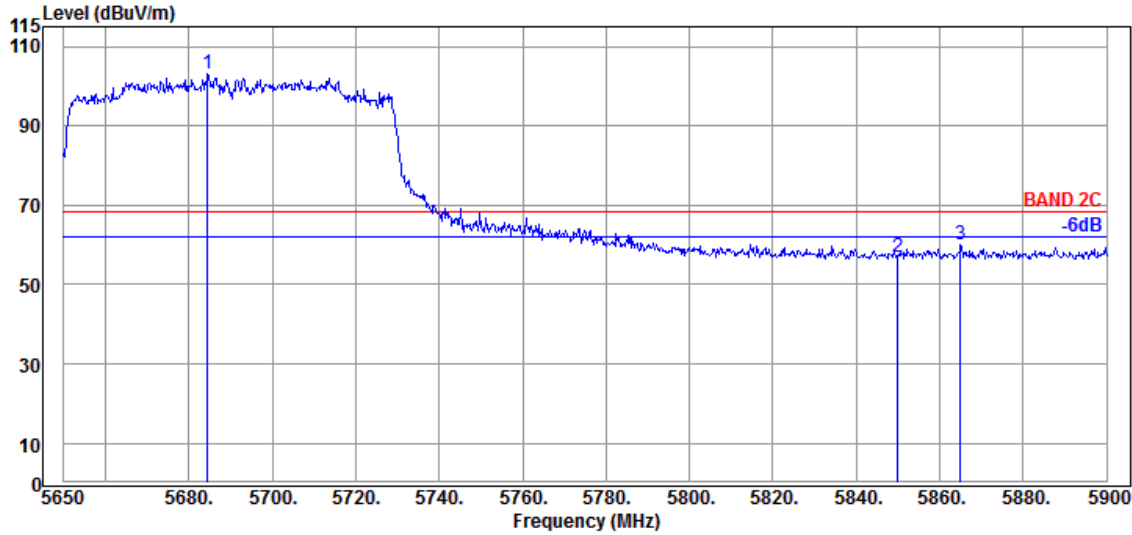

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5684.500 | 34.63 | 9.17 | 34.29 | 93.46 | 102.97 | --- | --- | Peak |
| 5850.000 | 35.40 | 9.25 | 34.36 | 46.61 | 56.90 | 68.20 | 11.30 | Peak |
| 5865.000 | 35.53 | 9.26 | 34.37 | 49.64 | 60.06 | 68.20 | 8.14 | Peak |

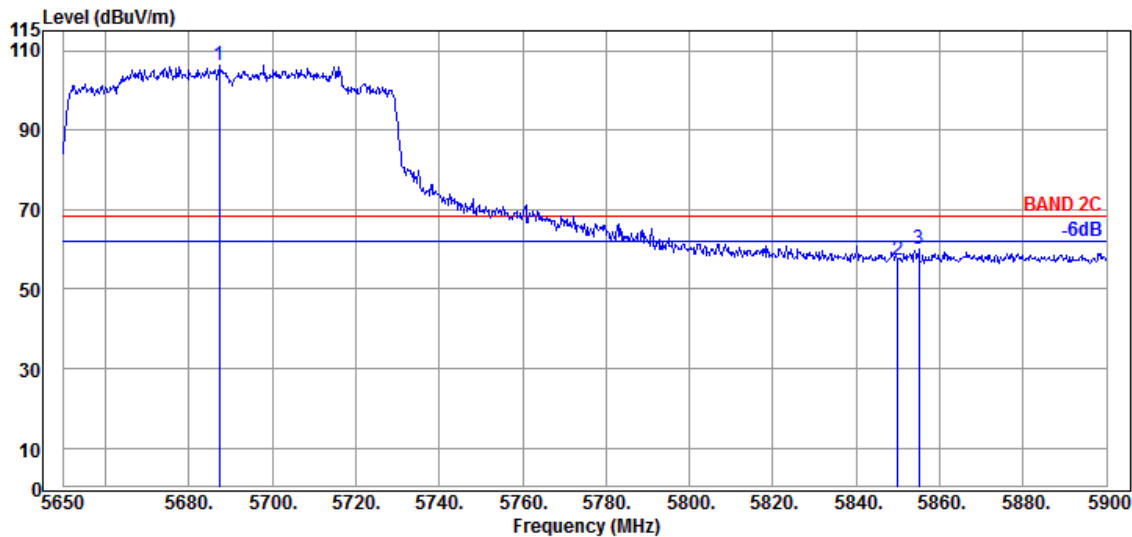


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5687.250 | 34.63 | 9.17 | 34.29 | 96.91 | 106.42 | --- | --- | Peak |
| 5850.000 | 35.40 | 9.25 | 34.36 | 47.14 | 57.43 | 68.20 | 10.77 | Peak |
| 5855.000 | 35.40 | 9.25 | 34.36 | 49.70 | 59.99 | 68.20 | 8.21 | Peak |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

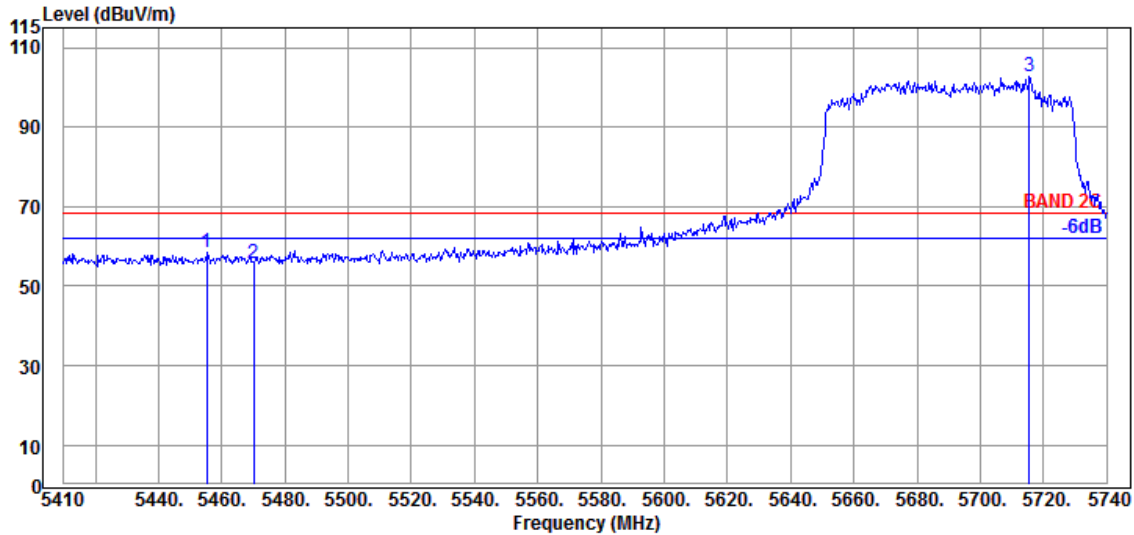

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5455.210 | 34.60 | 9.05 | 34.21 | 48.91 | 58.35 | 68.20 | 9.85 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 46.09 | 55.57 | 68.20 | 12.63 | Peak |
| @ 5715.580 | 34.80 | 9.19 | 34.30 | 93.08 | 102.77 | --- | --- | Peak |

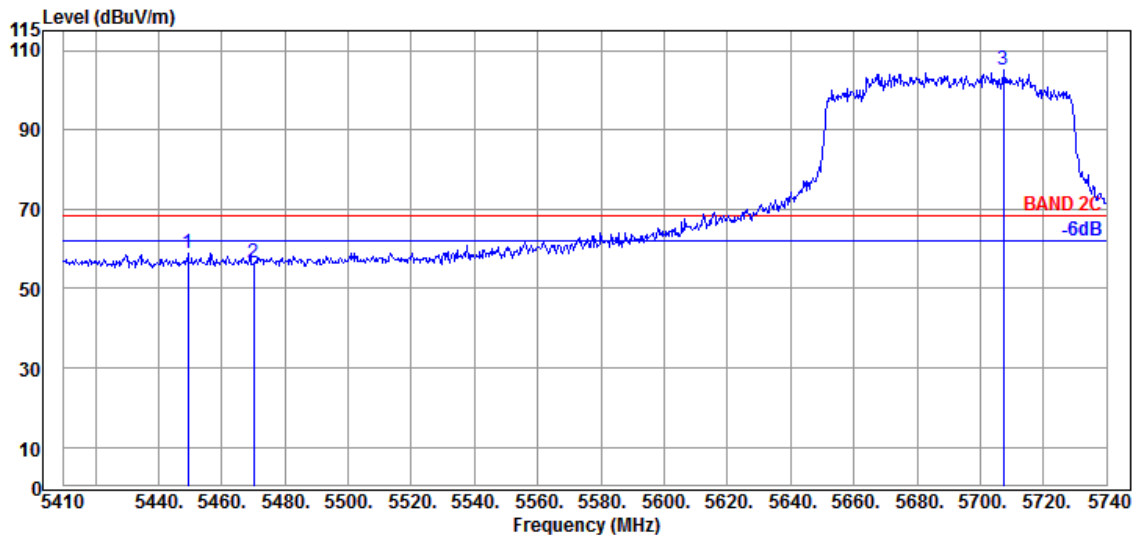


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5449.270 | 34.60 | 9.05 | 34.22 | 49.56 | 58.99 | 68.20 | 9.21 | Peak |
| 5470.060 | 34.63 | 9.06 | 34.21 | 46.85 | 56.33 | 68.20 | 11.87 | Peak |
| @ 5707.330 | 34.80 | 9.19 | 34.29 | 95.33 | 105.03 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

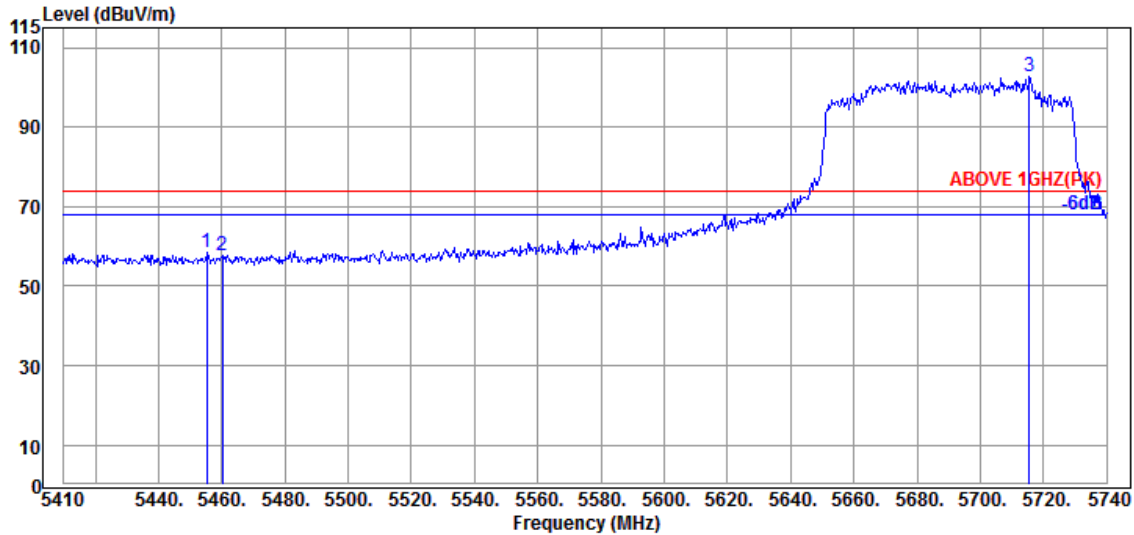

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5455.210 | 34.60 | 9.05 | 34.21 | 48.91 | 58.35 | 74.00 | 15.65 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 48.35 | 57.79 | 74.00 | 16.21 | Peak |
| @ 5715.580 | 34.80 | 9.19 | 34.30 | 93.08 | 102.77 | --- | --- | Peak |

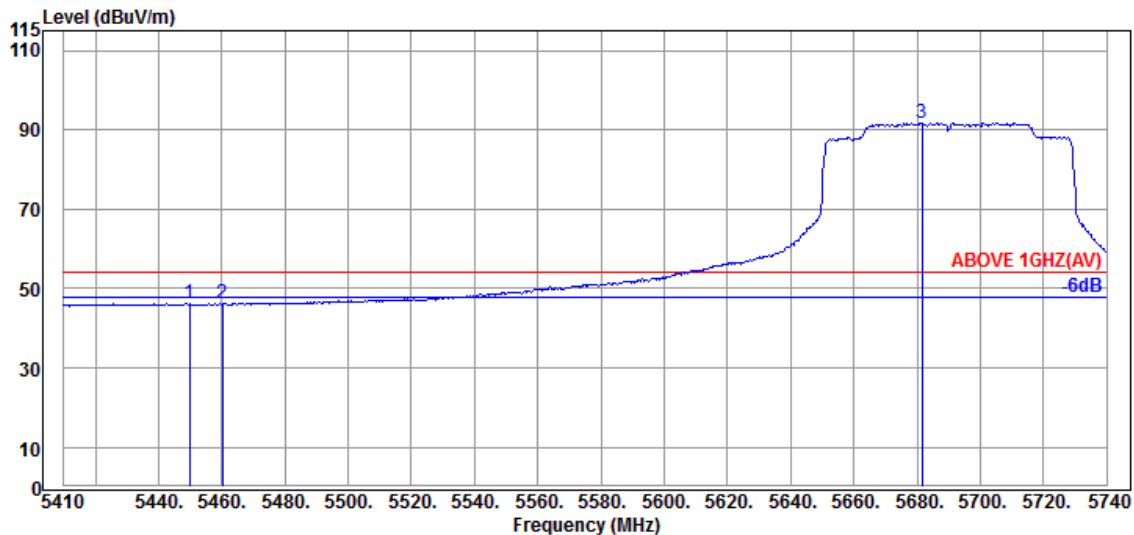


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5449.930 | 34.60 | 9.05 | 34.22 | 36.83 | 46.26 | 54.00 | 7.74 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.74 | 46.18 | 54.00 | 7.82 | Average |
| @ 5681.590 | 34.63 | 9.17 | 34.29 | 82.23 | 91.74 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

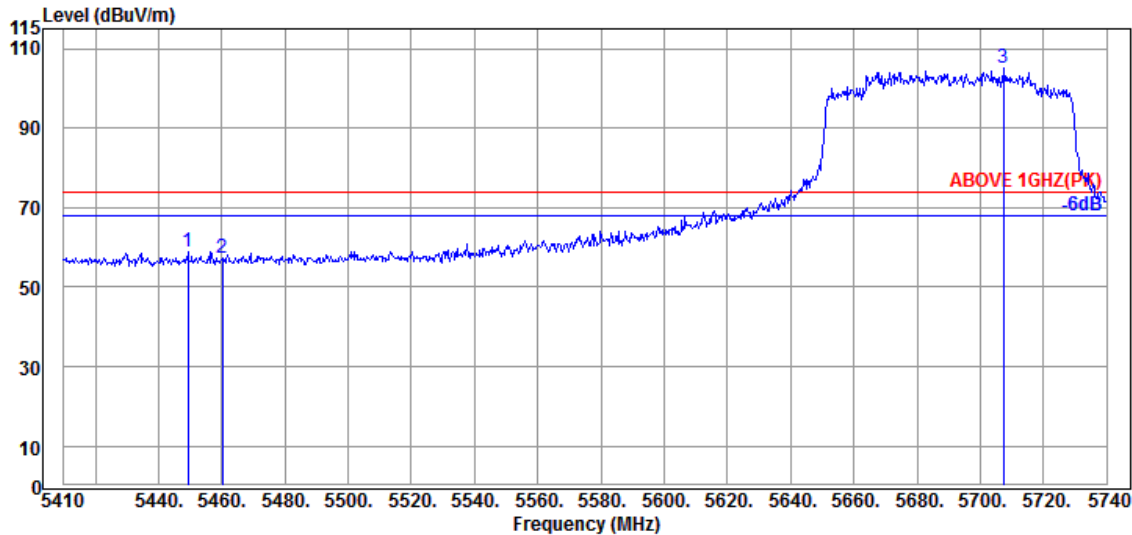

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5449.270 | 34.60 | 9.05 | 34.22 | 49.56 | 58.99 | 74.00 | 15.01 | Peak |
| 5460.160 | 34.60 | 9.05 | 34.21 | 47.97 | 57.41 | 74.00 | 16.59 | Peak |
| @ 5707.330 | 34.80 | 9.19 | 34.29 | 95.33 | 105.03 | --- | --- | Peak |

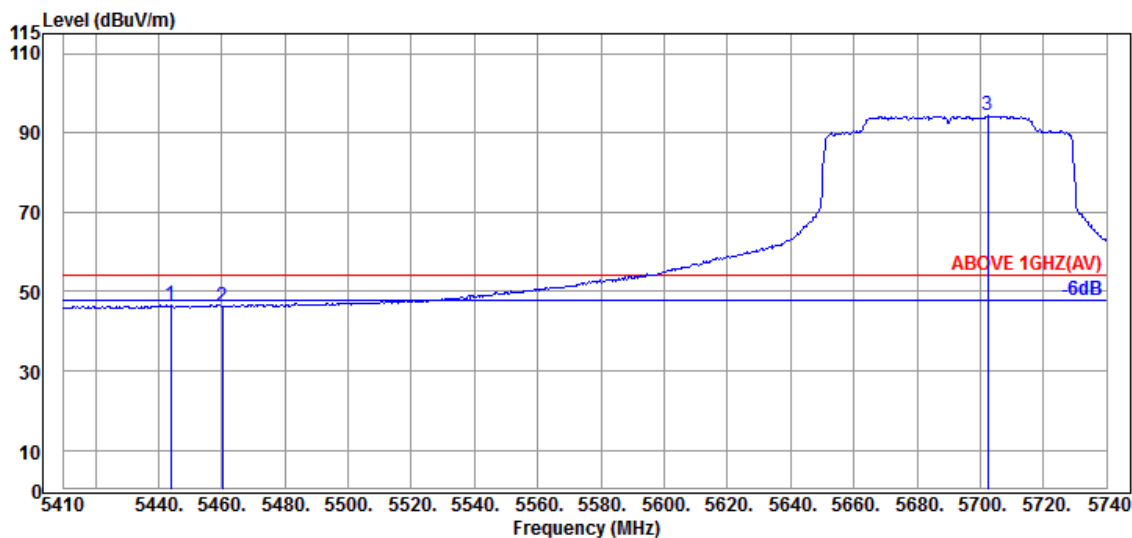


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5443.990 | 34.65 | 9.04 | 34.22 | 37.05 | 46.52 | 54.00 | 7.48 | Average |
| 5460.160 | 34.60 | 9.05 | 34.21 | 36.82 | 46.26 | 54.00 | 7.74 | Average |
| @ 5702.380 | 34.70 | 9.18 | 34.29 | 84.69 | 94.28 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ac-HE80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |


Antenna at Horizontal Polarization

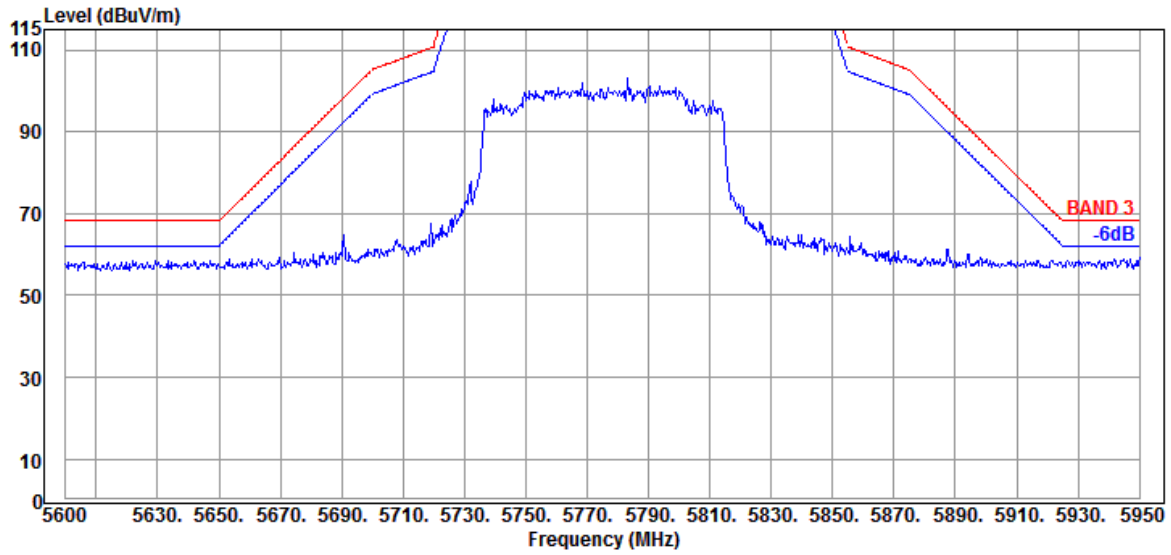

Antenna at Vertical Polarization

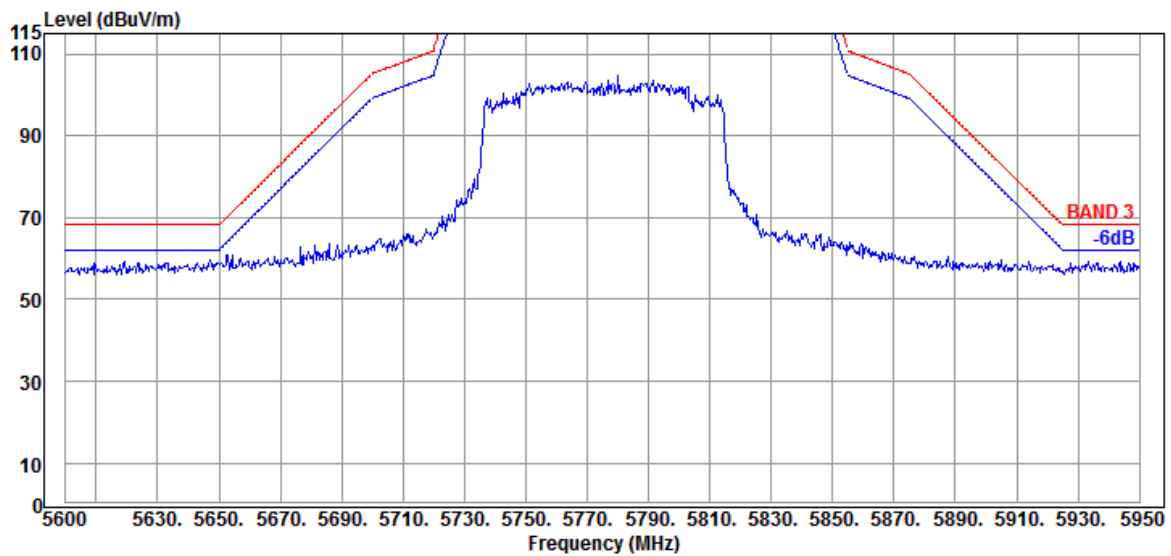


| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| | | Frequency | TX 5250MHz |

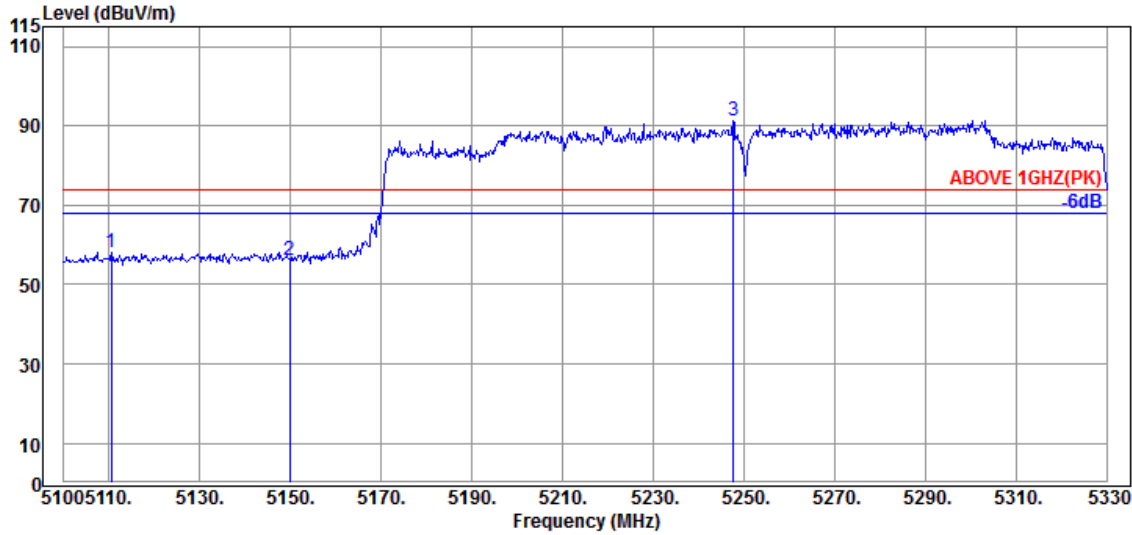

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5110.580 | 34.20 | 8.86 | 34.35 | 49.55 | 58.26 | 74.00 | 15.74 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 46.92 | 55.96 | 74.00 | 18.04 | Peak |
| @ 5247.660 | 34.50 | 8.94 | 34.30 | 82.26 | 91.40 | --- | --- | Peak |

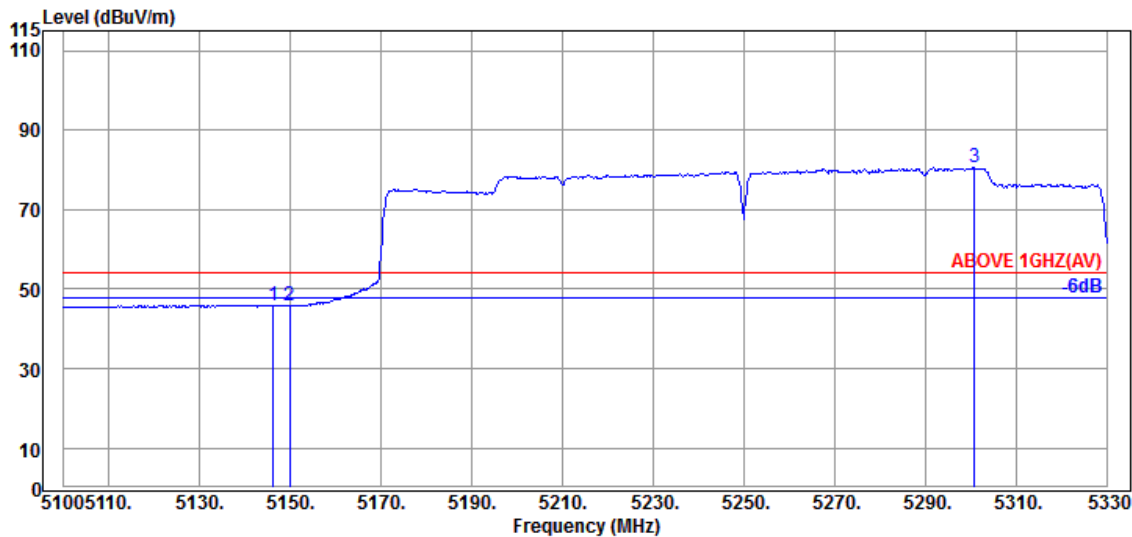


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.230 | 34.50 | 8.88 | 34.34 | 36.94 | 45.98 | 54.00 | 8.02 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 36.80 | 45.84 | 54.00 | 8.16 | Average |
| @ 5300.790 | 34.40 | 8.97 | 34.28 | 71.42 | 80.51 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | I & 2A |
| | | Frequency | TX 5250MHz |

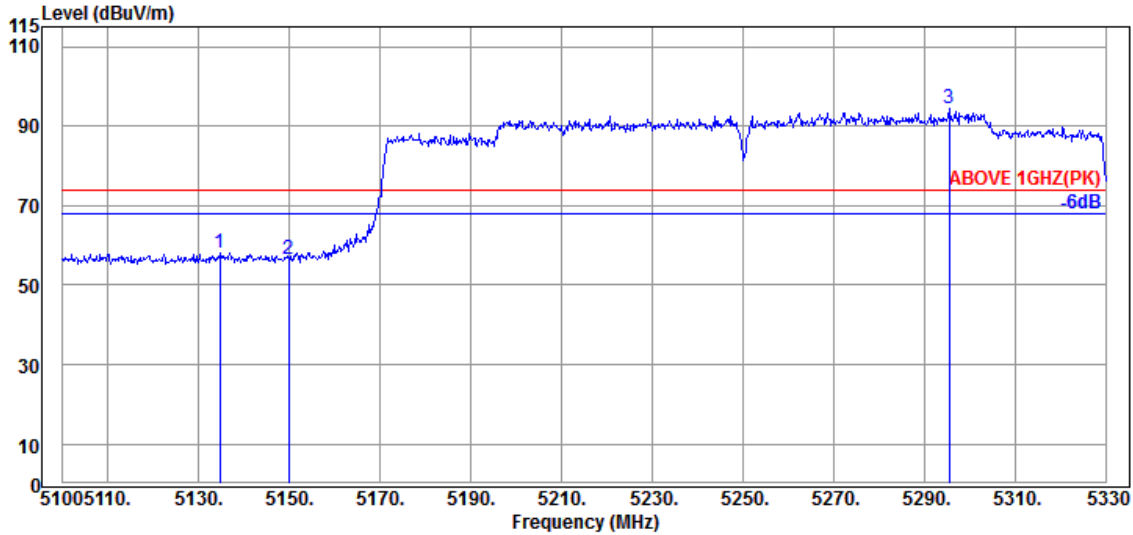

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5134.730 | 34.40 | 8.88 | 34.34 | 49.00 | 57.94 | 74.00 | 16.06 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 47.31 | 56.35 | 74.00 | 17.65 | Peak |
| @ 5295.500 | 34.40 | 8.97 | 34.28 | 85.23 | 94.32 | --- | --- | Peak |

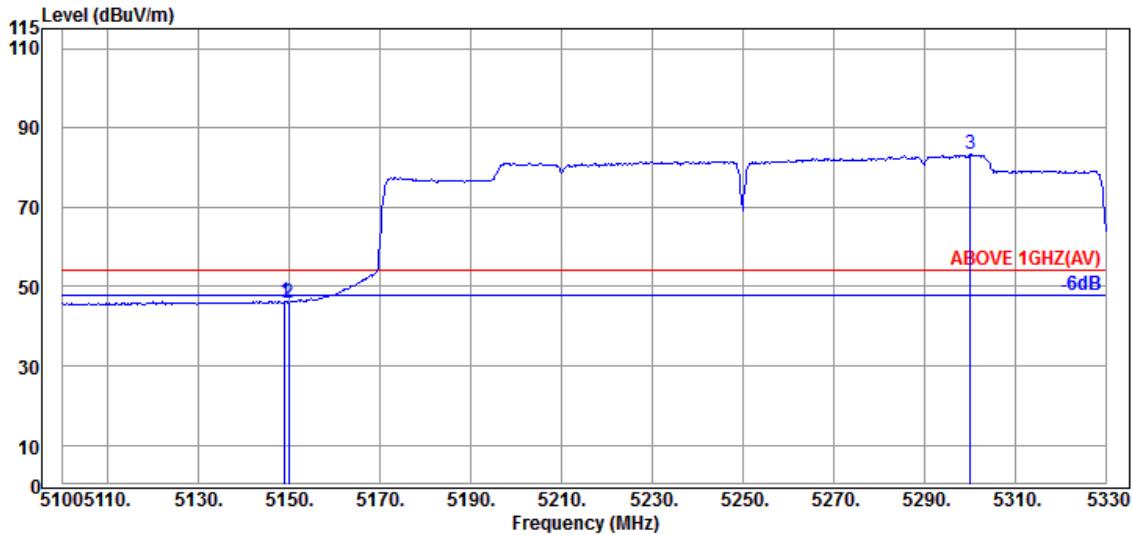


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.990 | 34.50 | 8.88 | 34.34 | 37.18 | 46.22 | 54.00 | 7.78 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 36.97 | 46.01 | 54.00 | 7.99 | Average |
| @ 5300.100 | 34.40 | 8.97 | 34.28 | 74.18 | 83.27 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| | | Frequency | TX 5250MHz |

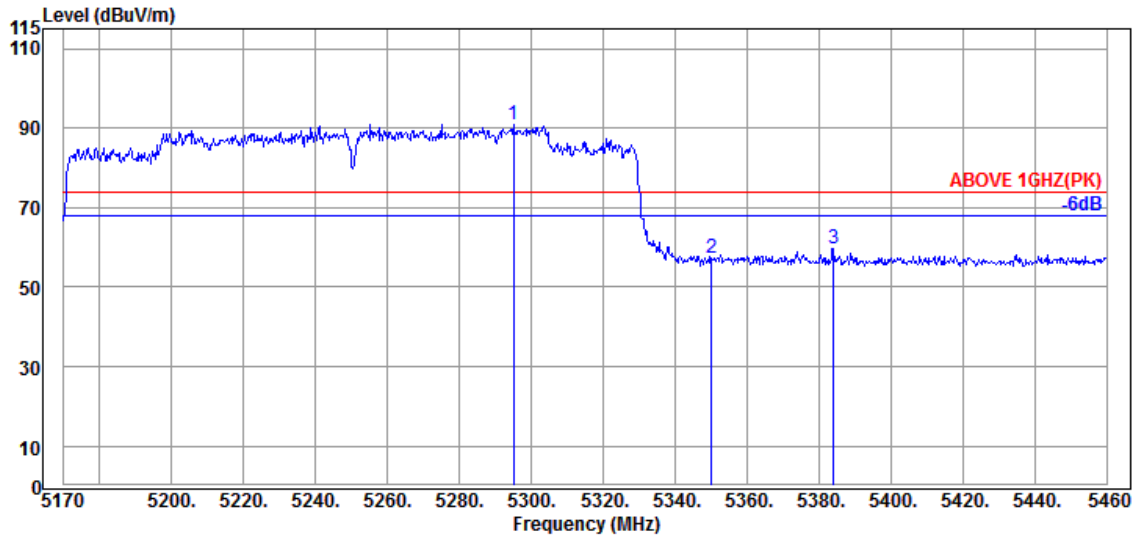

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5294.990 | 34.40 | 8.97 | 34.28 | 81.69 | 90.78 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 47.78 | 57.41 | 74.00 | 16.59 | Peak |
| 5384.020 | 34.83 | 9.01 | 34.24 | 49.95 | 59.55 | 74.00 | 14.45 | Peak |

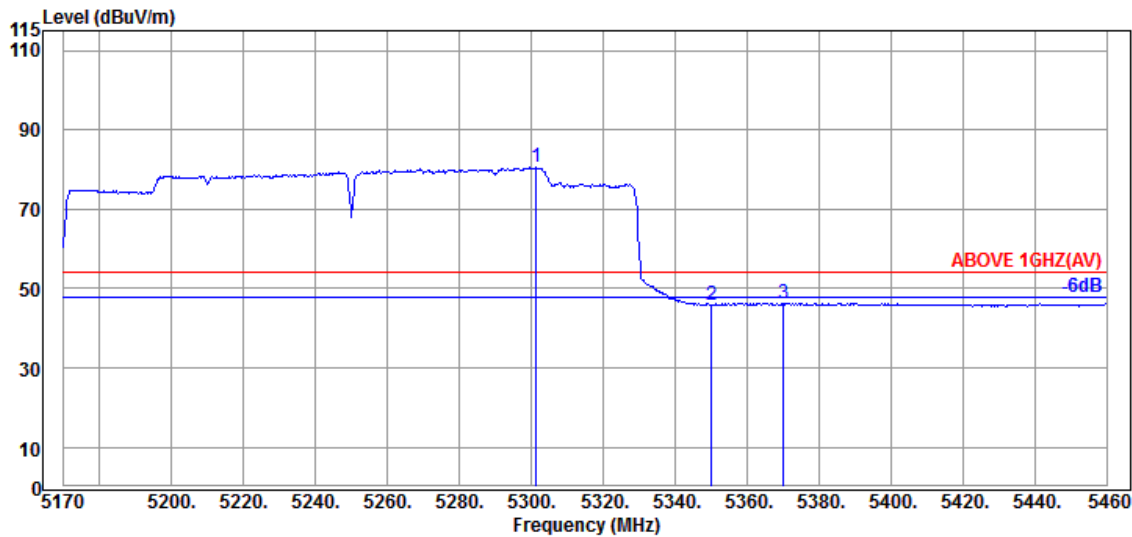


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5301.370 | 34.40 | 8.97 | 34.28 | 71.37 | 80.46 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 36.40 | 46.03 | 54.00 | 7.97 | Average |
| 5370.100 | 34.83 | 9.01 | 34.25 | 36.71 | 46.30 | 54.00 | 7.70 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| | | Frequency | TX 5250MHz |

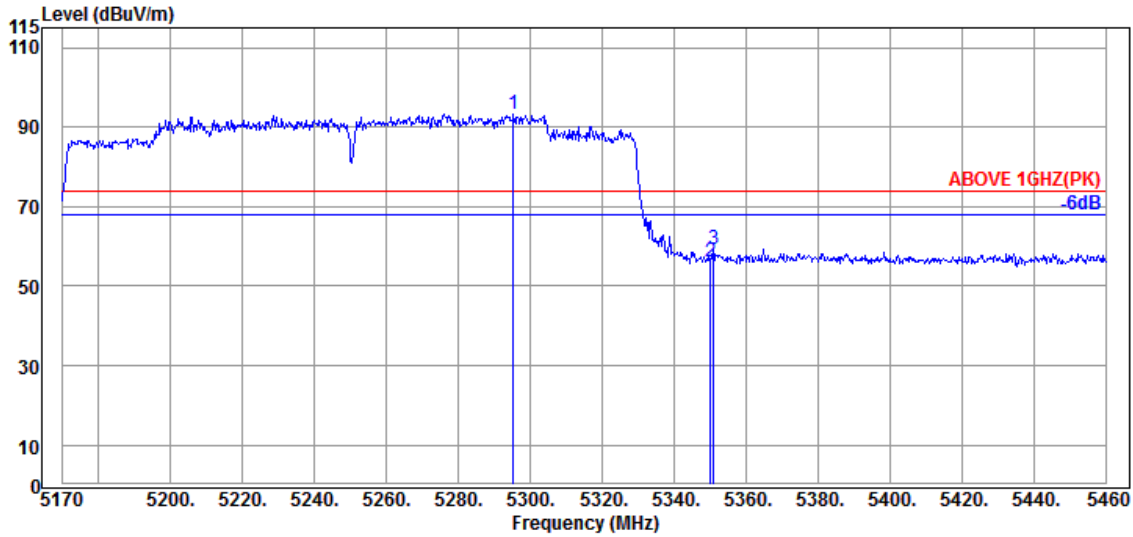

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5295.280 | 34.40 | 8.97 | 34.28 | 84.15 | 93.24 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 46.36 | 55.99 | 74.00 | 18.01 | Peak |
| 5350.960 | 34.90 | 8.99 | 34.26 | 49.67 | 59.30 | 74.00 | 14.70 | Peak |

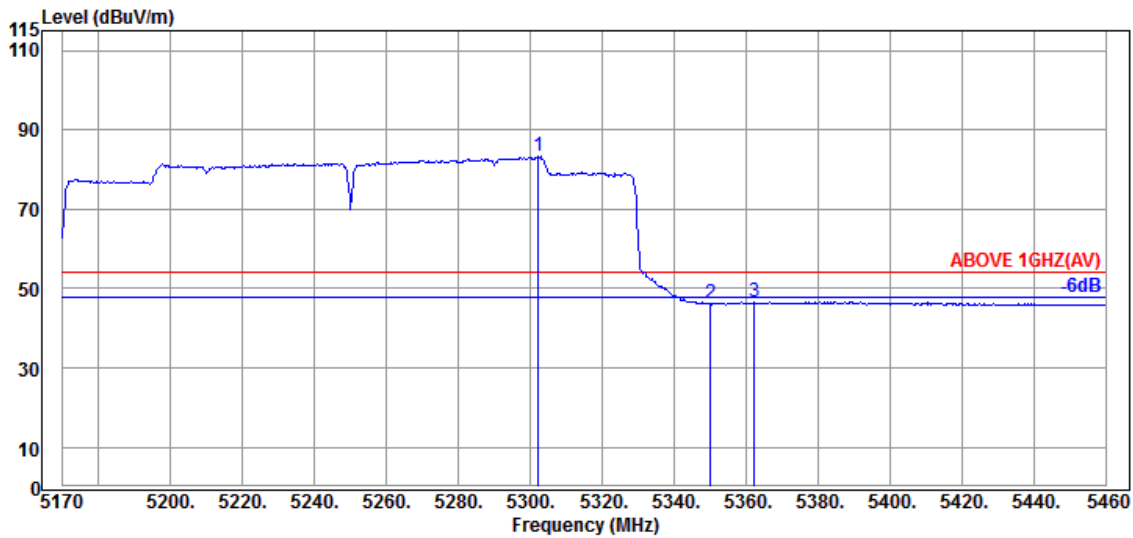


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.240 | 34.40 | 8.97 | 34.28 | 74.11 | 83.20 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 36.71 | 46.34 | 54.00 | 7.66 | Average |
| 5362.270 | 34.87 | 9.00 | 34.26 | 36.95 | 46.56 | 54.00 | 7.44 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

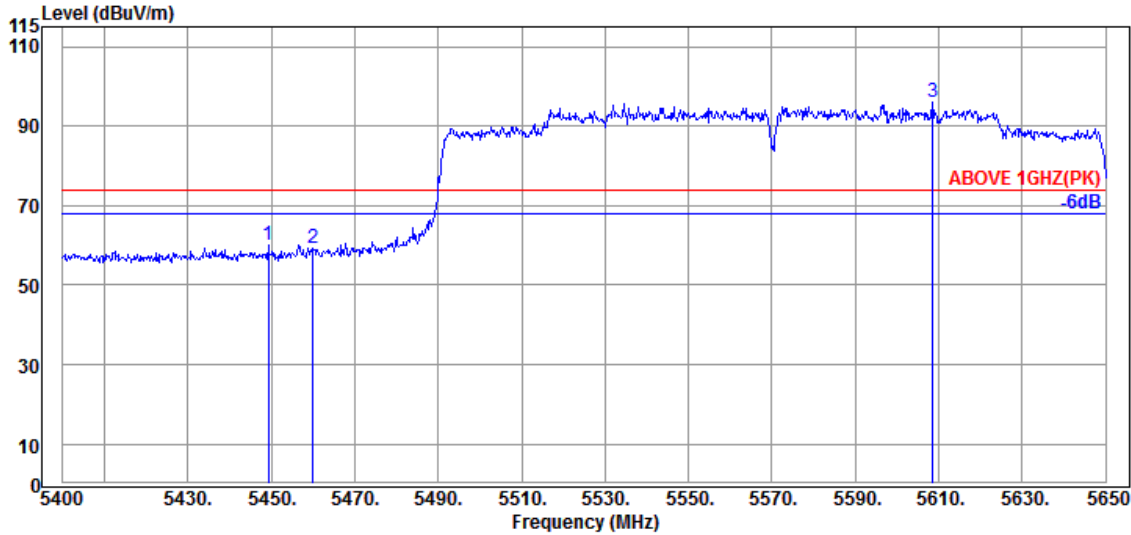

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5449.250 | 34.60 | 9.05 | 34.22 | 50.80 | 60.23 | 74.00 | 13.77 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 49.68 | 59.12 | 74.00 | 14.88 | Peak |
| @ 5608.500 | 34.43 | 9.14 | 34.25 | 86.77 | 96.09 | --- | --- | Peak |

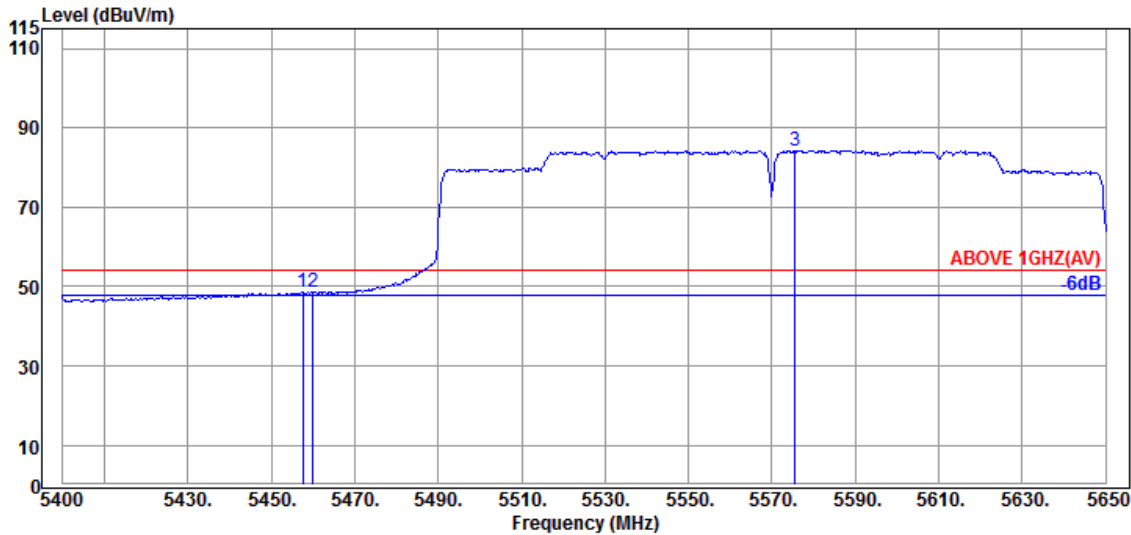


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.500 | 34.60 | 9.05 | 34.21 | 39.29 | 48.73 | 54.00 | 5.27 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 39.11 | 48.55 | 54.00 | 5.45 | Average |
| @ 5575.500 | 34.50 | 9.12 | 34.23 | 74.98 | 84.37 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

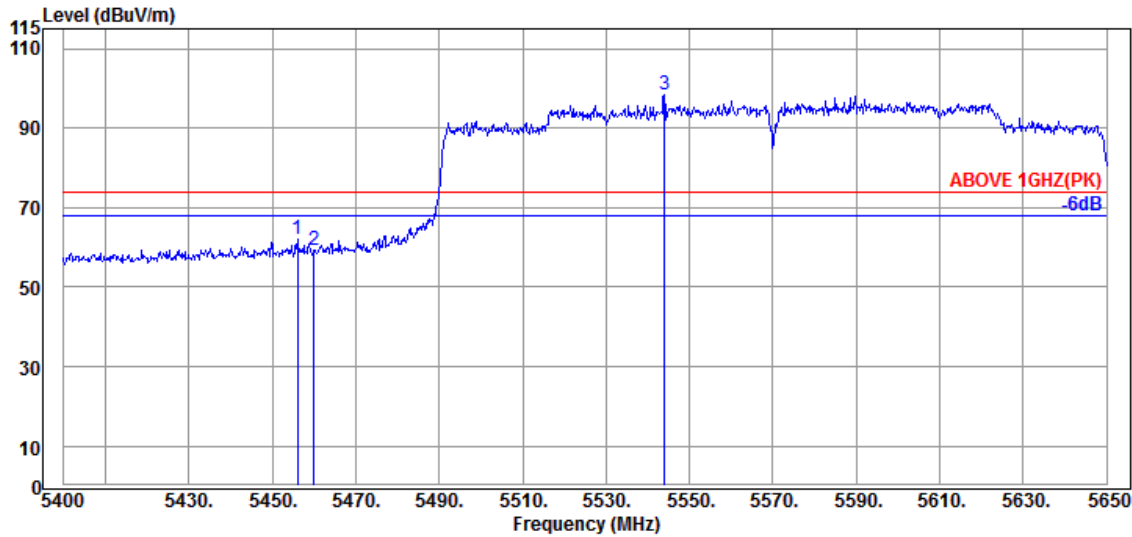

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5456.000 | 34.60 | 9.05 | 34.21 | 52.59 | 62.03 | 74.00 | 11.97 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 49.71 | 59.15 | 74.00 | 14.85 | Peak |
| @ 5544.000 | 34.70 | 9.10 | 34.23 | 88.77 | 98.34 | --- | --- | Peak |

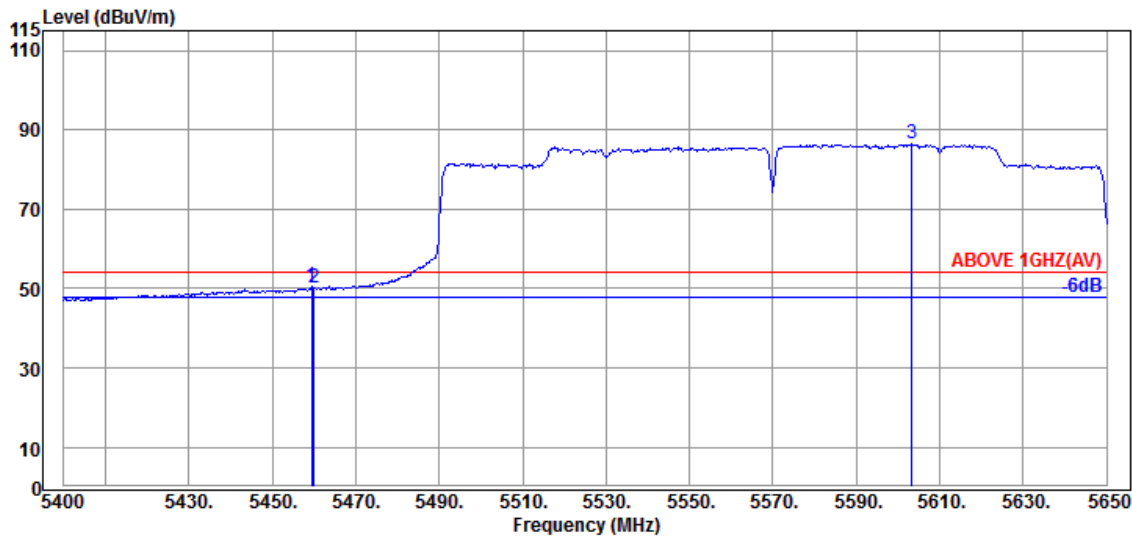


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.500 | 34.60 | 9.05 | 34.21 | 40.98 | 50.42 | 54.00 | 3.58 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 40.83 | 50.27 | 54.00 | 3.73 | Average |
| @ 5603.250 | 34.40 | 9.13 | 34.25 | 77.15 | 86.43 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

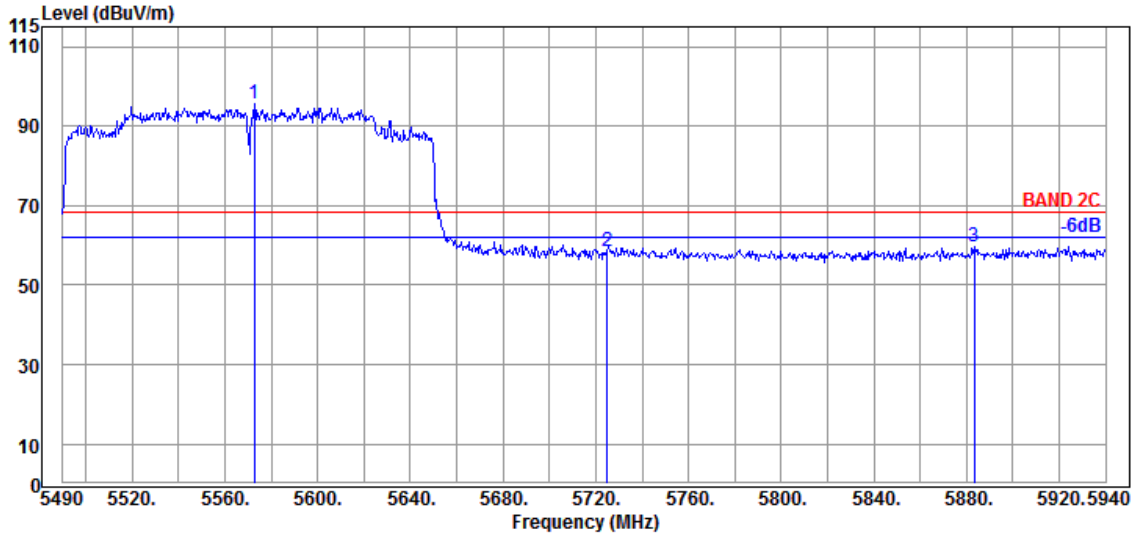

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5572.800 | 34.60 | 9.11 | 34.23 | 86.01 | 95.49 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 48.87 | 58.67 | 68.20 | 9.53 | Peak |
| 5883.300 | 35.67 | 9.27 | 34.38 | 49.14 | 59.70 | 68.20 | 8.50 | Peak |

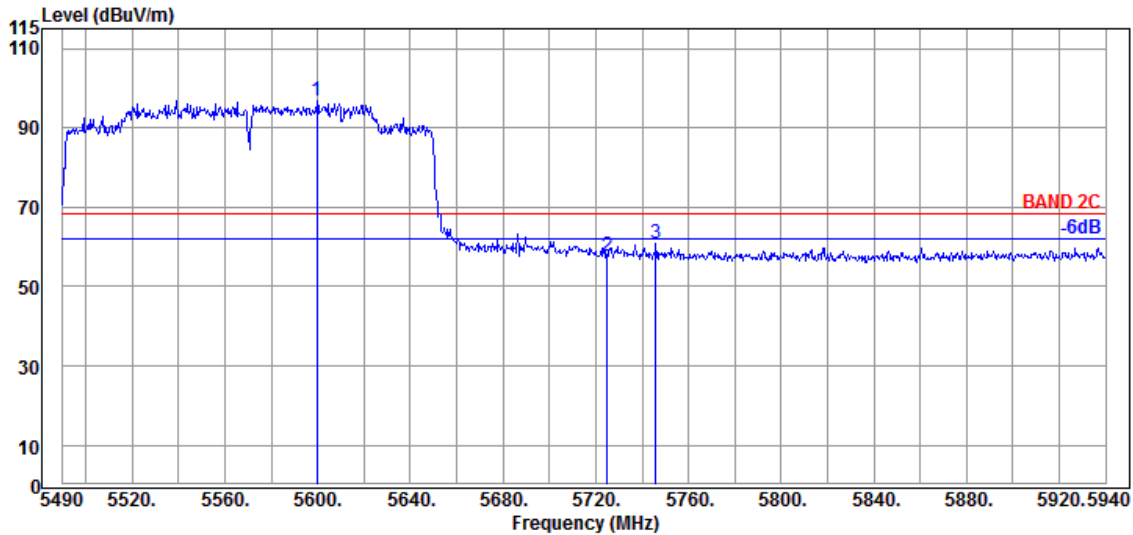


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5599.800 | 34.40 | 9.13 | 34.25 | 87.37 | 96.65 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 47.85 | 57.65 | 68.20 | 10.55 | Peak |
| 5746.050 | 35.00 | 9.20 | 34.32 | 51.14 | 61.02 | 68.20 | 7.18 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

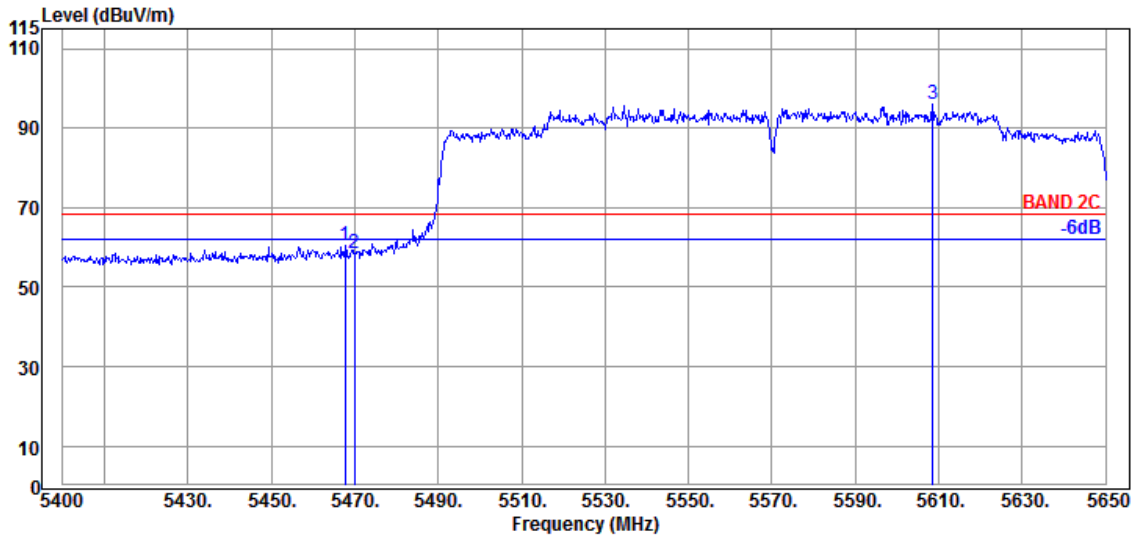

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.750 | 34.63 | 9.06 | 34.21 | 50.84 | 60.32 | 68.20 | 7.88 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 48.81 | 58.29 | 68.20 | 9.91 | Peak |
| @ 5608.500 | 34.43 | 9.14 | 34.25 | 86.77 | 96.09 | --- | --- | Peak |

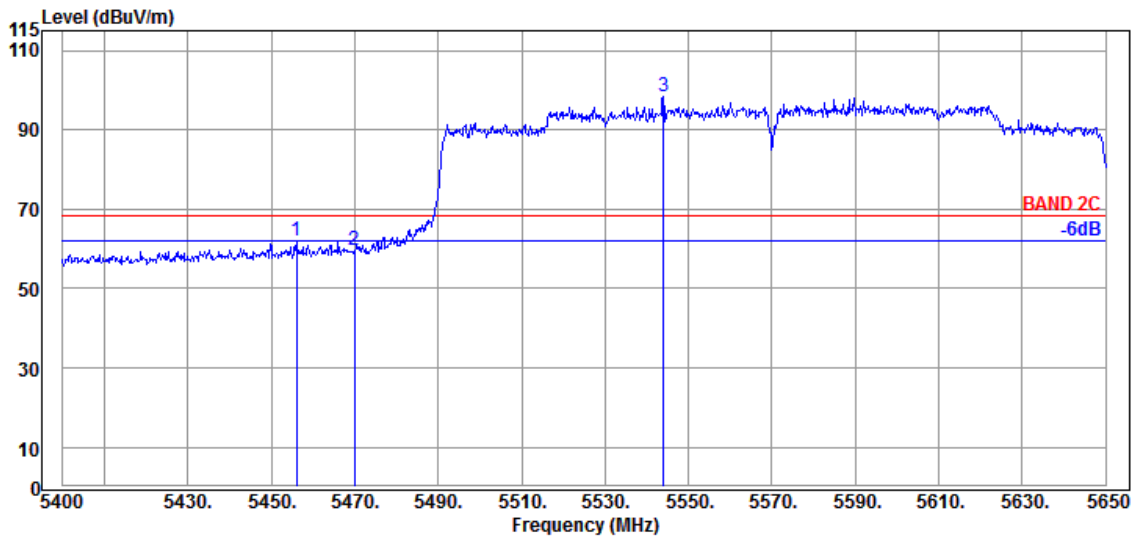


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5456.000 | 34.60 | 9.05 | 34.21 | 52.59 | 62.03 | 68.20 | 6.17 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 50.28 | 59.76 | 68.20 | 8.44 | Peak |
| @ 5544.000 | 34.70 | 9.10 | 34.23 | 88.77 | 98.34 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 26/0 | Frequency | TX 5180MHz |

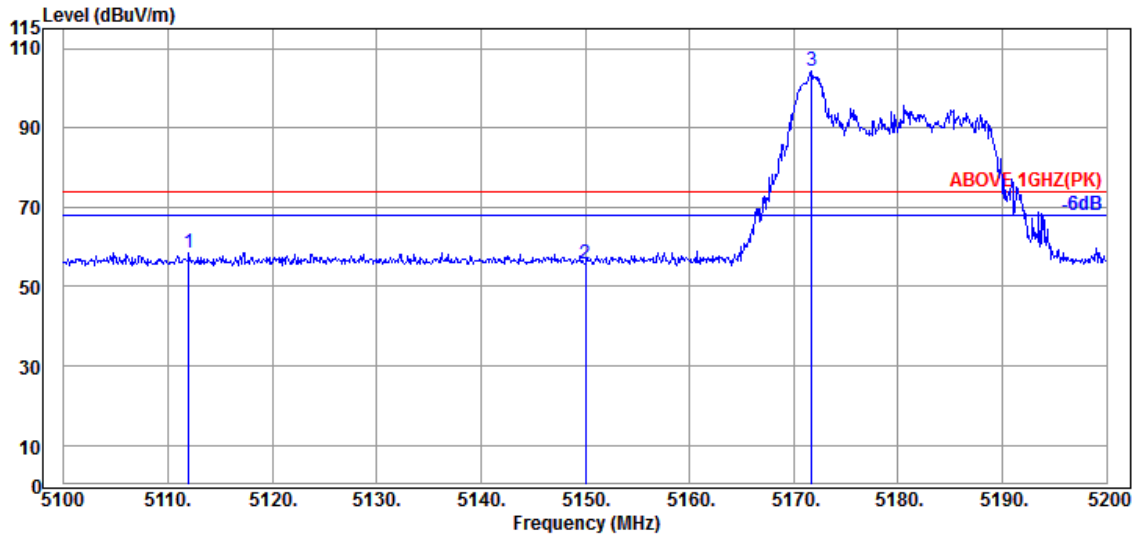

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5112.000 | 34.20 | 8.86 | 34.35 | 49.96 | 58.67 | 74.00 | 15.33 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 46.84 | 55.88 | 74.00 | 18.12 | Peak |
| @ 5171.700 | 34.63 | 8.90 | 34.33 | 95.01 | 104.21 | --- | --- | Peak |

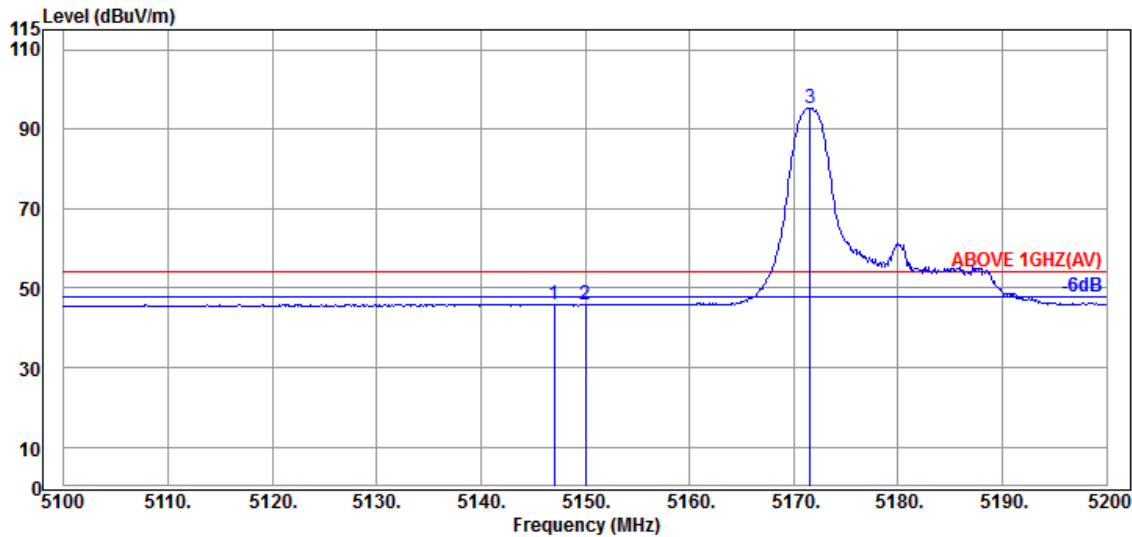


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.000 | 34.50 | 8.88 | 34.34 | 36.97 | 46.01 | 54.00 | 7.99 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.78 | 45.82 | 54.00 | 8.18 | Average |
| @ 5171.600 | 34.63 | 8.90 | 34.33 | 86.18 | 95.38 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 26/0 | Frequency | TX 5180MHz |

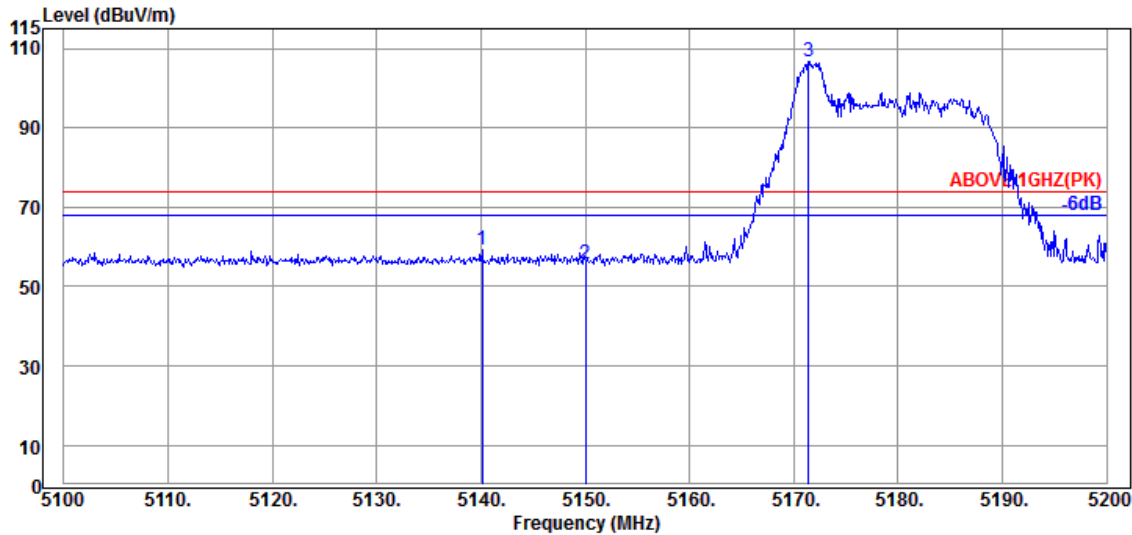

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5140.100 | 34.40 | 8.88 | 34.34 | 50.18 | 59.12 | 74.00 | 14.88 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 46.70 | 55.74 | 74.00 | 18.26 | Peak |
| @ 5171.400 | 34.57 | 8.89 | 34.33 | 97.39 | 106.52 | --- | --- | Peak |

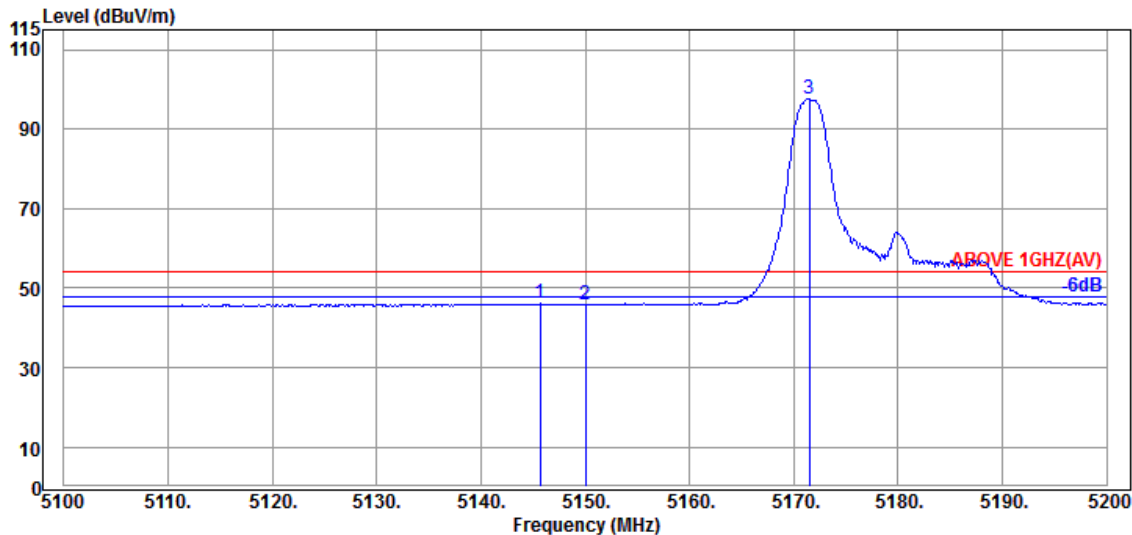


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.700 | 34.50 | 8.88 | 34.34 | 37.05 | 46.09 | 54.00 | 7.91 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.72 | 45.76 | 54.00 | 8.24 | Average |
| @ 5171.500 | 34.57 | 8.89 | 34.33 | 88.55 | 97.68 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 52/37 | Frequency | TX 5180MHz |

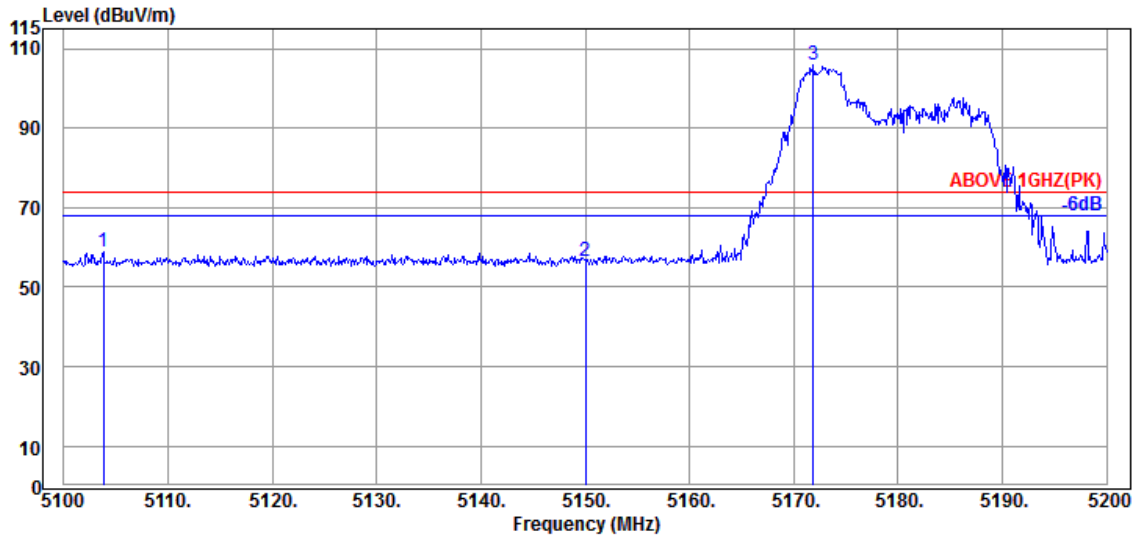

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5103.800 | 34.20 | 8.86 | 34.36 | 50.20 | 58.90 | 74.00 | 15.10 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 47.39 | 56.43 | 74.00 | 17.57 | Peak |
| @ 5171.900 | 34.63 | 8.90 | 34.33 | 96.70 | 105.90 | --- | --- | Peak |

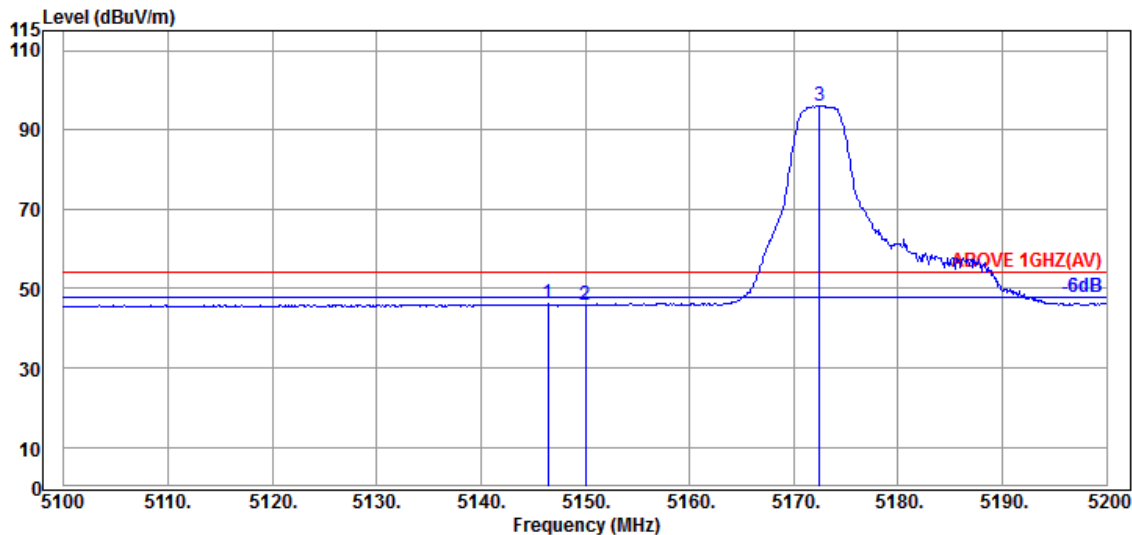


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5146.400 | 34.50 | 8.88 | 34.34 | 37.01 | 46.05 | 54.00 | 7.95 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.69 | 45.73 | 54.00 | 8.27 | Average |
| @ 5172.500 | 34.63 | 8.90 | 34.33 | 86.87 | 96.07 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 52/37 | Frequency | TX 5180MHz |

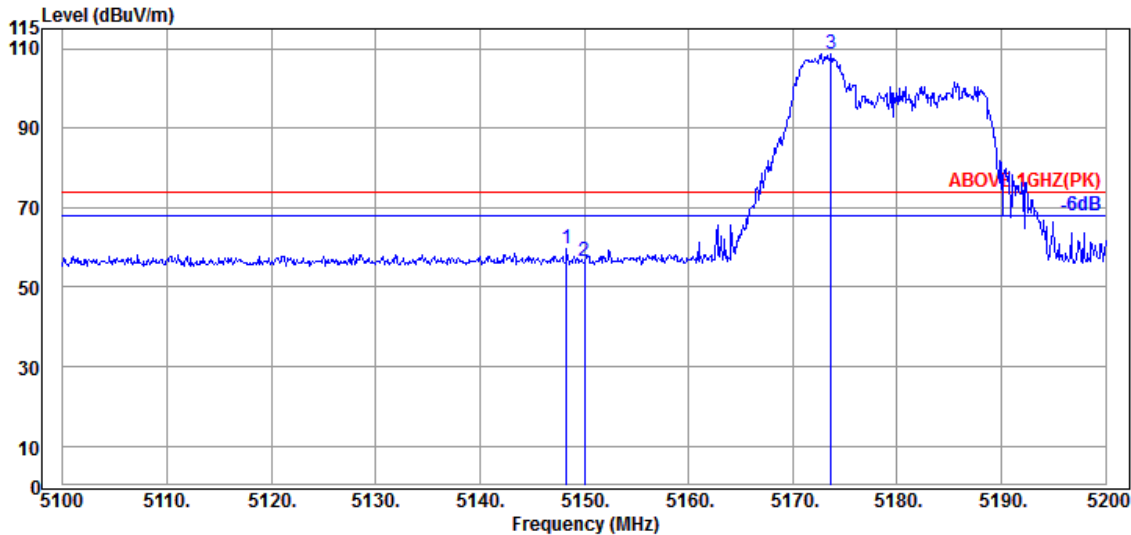

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.300 | 34.50 | 8.88 | 34.34 | 50.65 | 59.69 | 74.00 | 14.31 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 47.56 | 56.60 | 74.00 | 17.40 | Peak |
| @ 5173.700 | 34.63 | 8.90 | 34.32 | 99.58 | 108.79 | --- | --- | Peak |

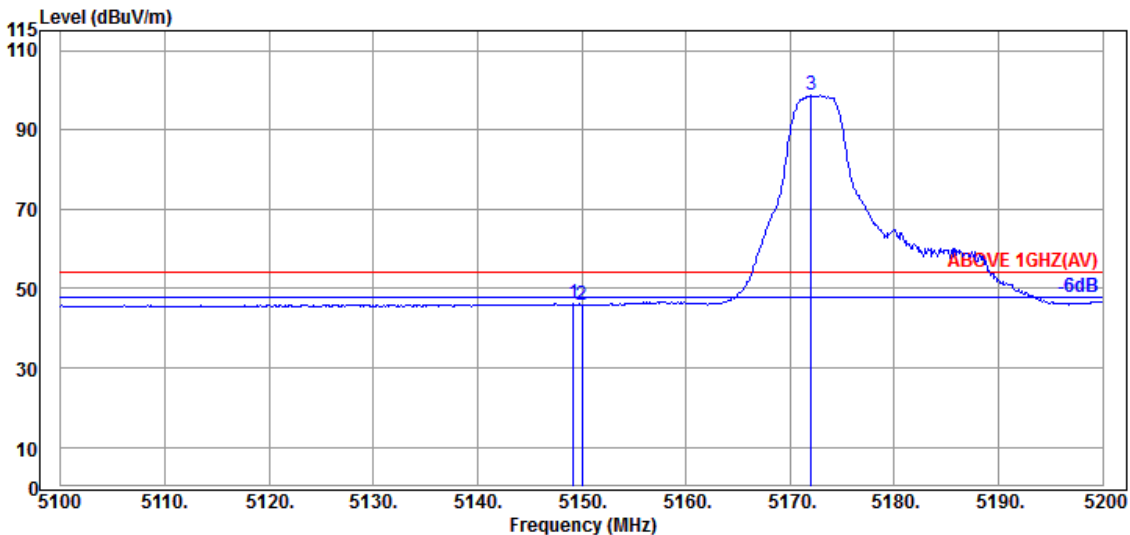


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.200 | 34.50 | 8.88 | 34.34 | 37.02 | 46.06 | 54.00 | 7.94 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.71 | 45.75 | 54.00 | 8.25 | Average |
| @ 5172.000 | 34.63 | 8.90 | 34.33 | 89.51 | 98.71 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 106/53 | Frequency | TX 5180MHz |

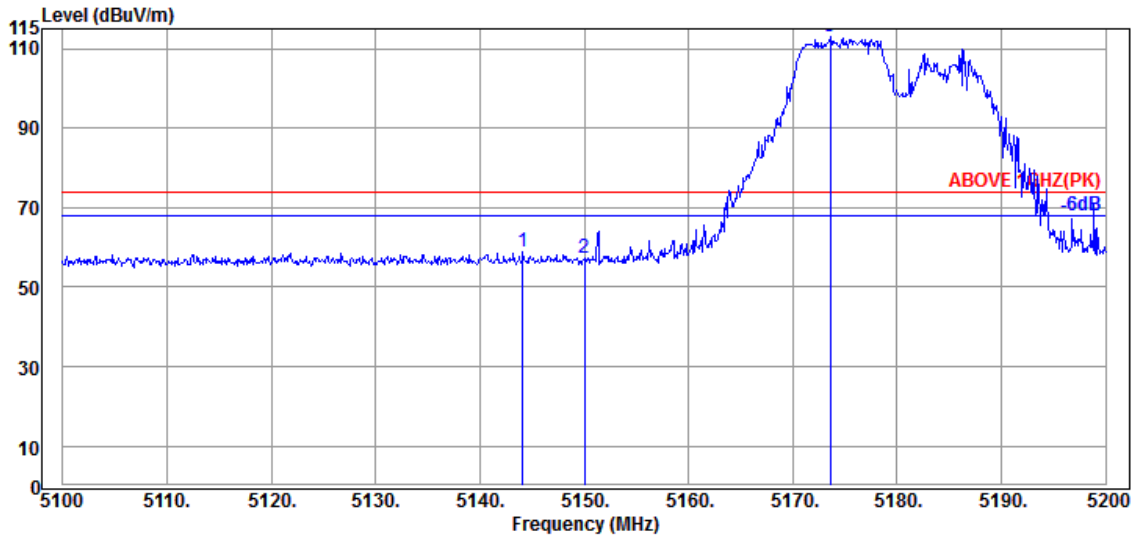

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5144.100 | 34.50 | 8.88 | 34.34 | 49.84 | 58.88 | 74.00 | 15.12 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 48.19 | 57.23 | 74.00 | 16.77 | Peak |
| @ 5173.600 | 34.63 | 8.90 | 34.32 | 103.89 | 113.10 | --- | --- | Peak |

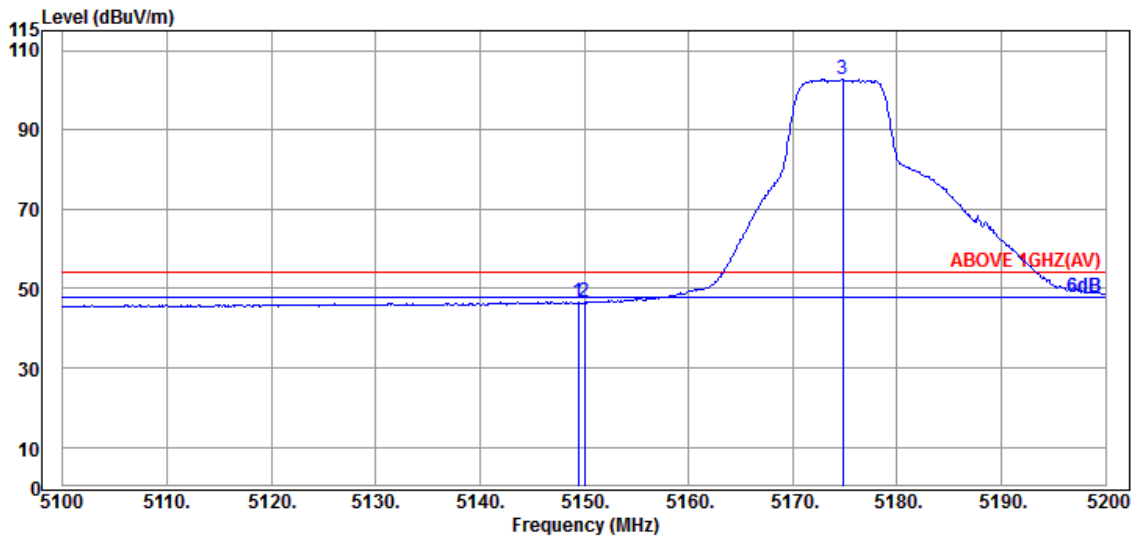


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.400 | 34.50 | 8.88 | 34.34 | 37.53 | 46.57 | 54.00 | 7.43 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 37.41 | 46.45 | 54.00 | 7.55 | Average |
| @ 5174.800 | 34.63 | 8.90 | 34.32 | 93.47 | 102.68 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 106/53 | Frequency | TX 5180MHz |

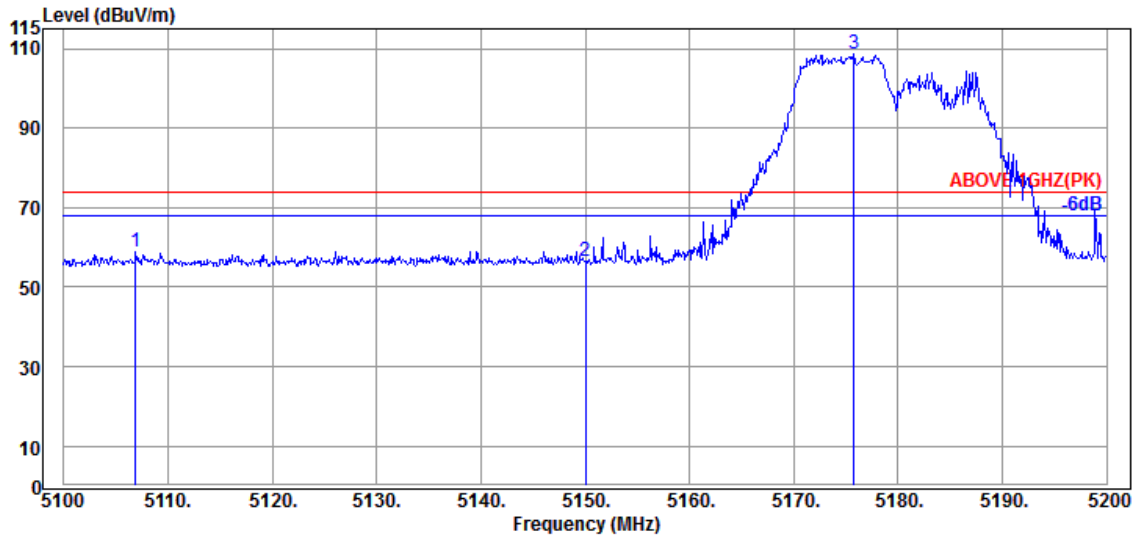

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5106.900 | 34.20 | 8.86 | 34.35 | 50.13 | 58.84 | 74.00 | 15.16 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 47.53 | 56.57 | 74.00 | 17.43 | Peak |
| @ 5175.800 | 34.63 | 8.90 | 34.32 | 99.33 | 108.54 | --- | --- | Peak |

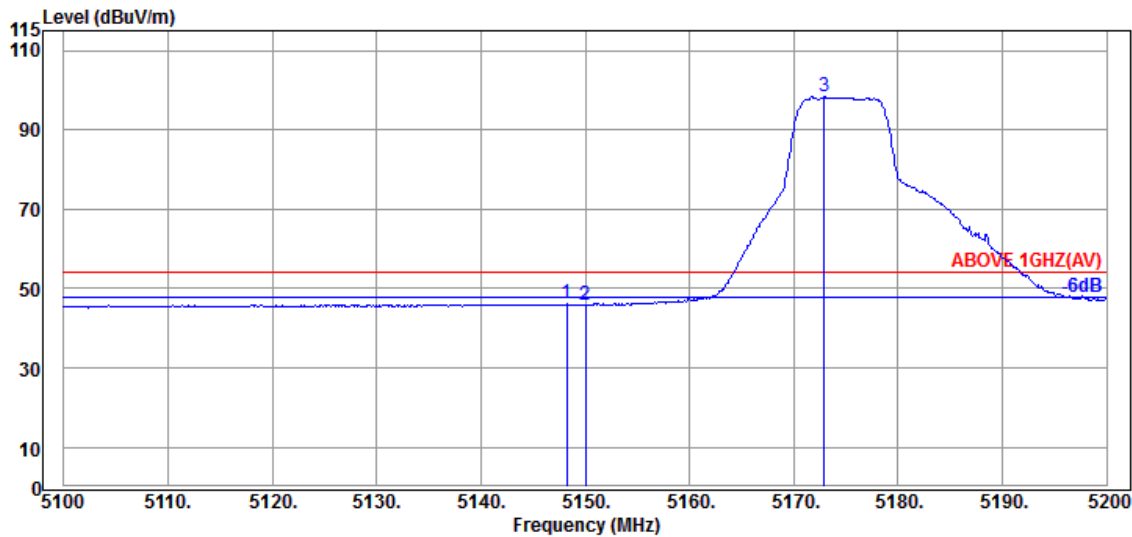


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.200 | 34.50 | 8.88 | 34.34 | 37.02 | 46.06 | 54.00 | 7.94 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.95 | 45.99 | 54.00 | 8.01 | Average |
| @ 5172.900 | 34.63 | 8.90 | 34.33 | 89.15 | 98.35 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 26/8 | Frequency | TX 5320MHz |

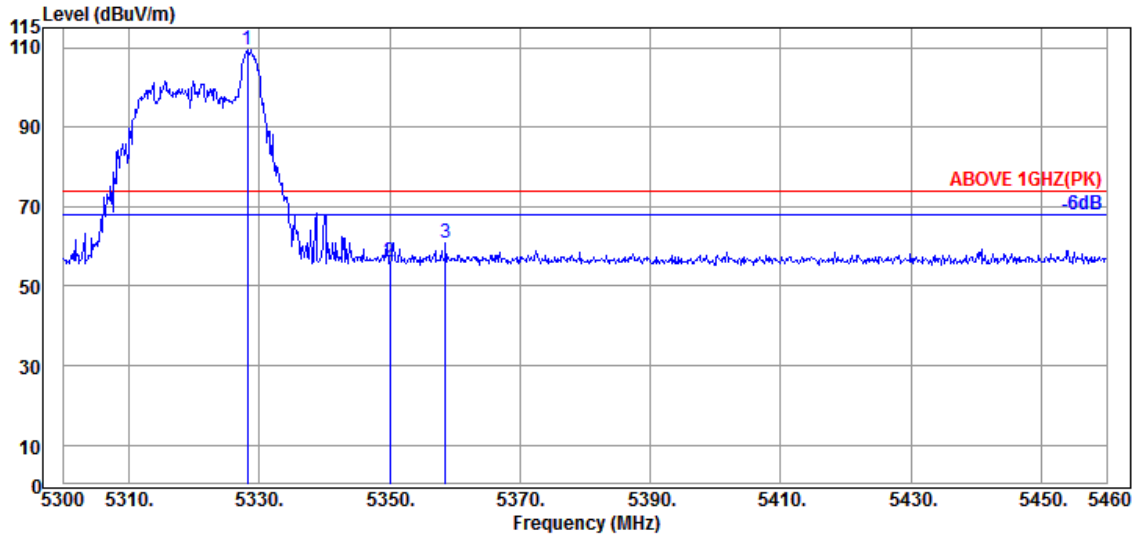

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160 | 34.73 | 8.99 | 34.26 | 100.15 | 109.61 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 46.55 | 56.18 | 74.00 | 17.82 | Peak |
| 5358.560 | 34.87 | 9.00 | 34.26 | 51.19 | 60.80 | 74.00 | 13.20 | Peak |

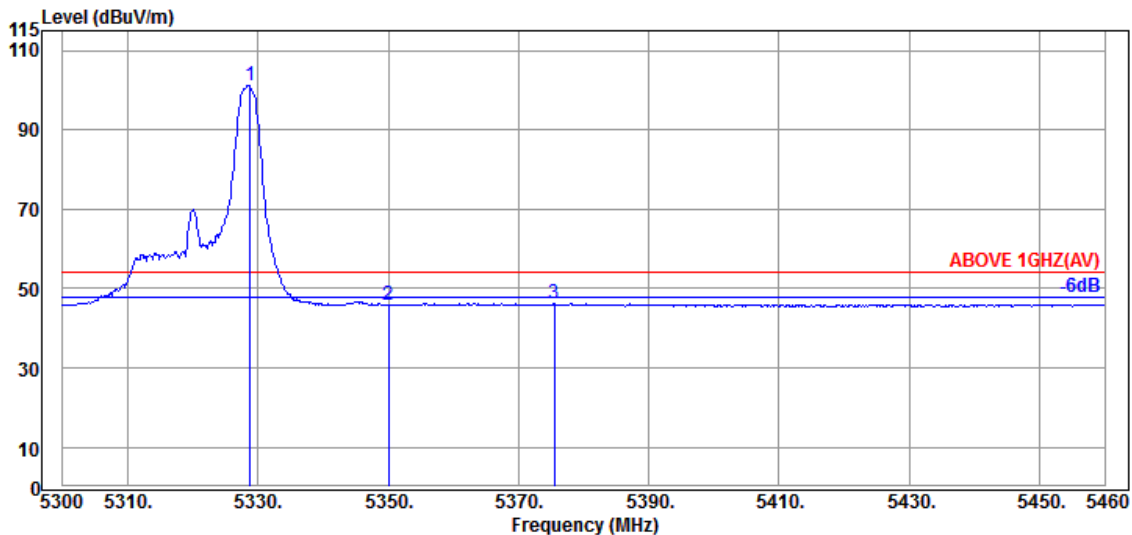


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.800 | 34.73 | 8.99 | 34.26 | 91.79 | 101.25 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.37 | 46.00 | 54.00 | 8.00 | Average |
| 5375.520 | 34.83 | 9.01 | 34.25 | 36.74 | 46.33 | 54.00 | 7.67 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 26/8 | Frequency | TX 5320MHz |

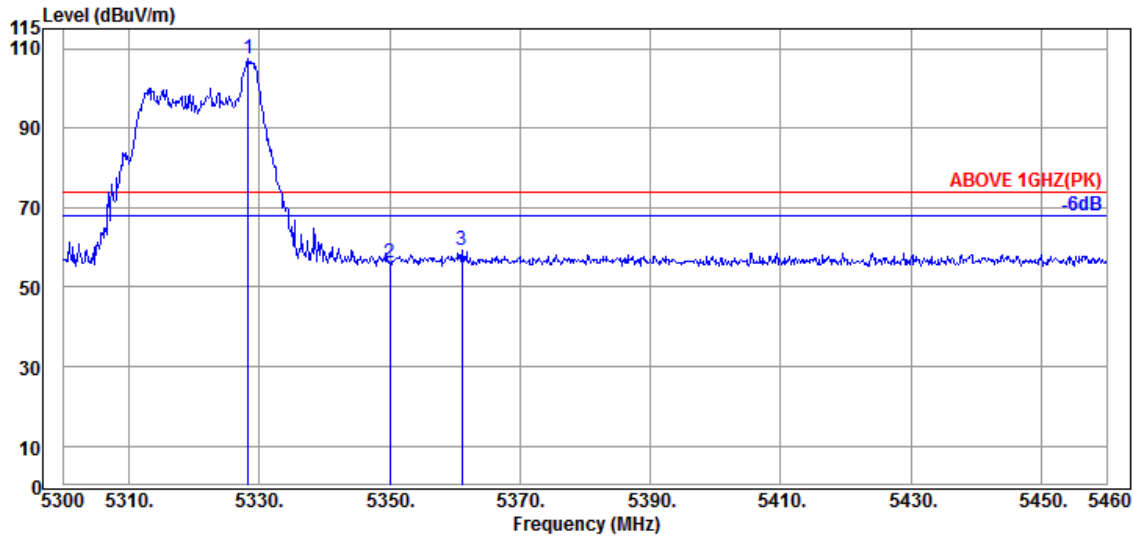

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.320 | 34.73 | 8.99 | 34.26 | 98.13 | 107.59 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 46.34 | 55.97 | 74.00 | 18.03 | Peak |
| 5361.120 | 34.87 | 9.00 | 34.26 | 49.81 | 59.42 | 74.00 | 14.58 | Peak |

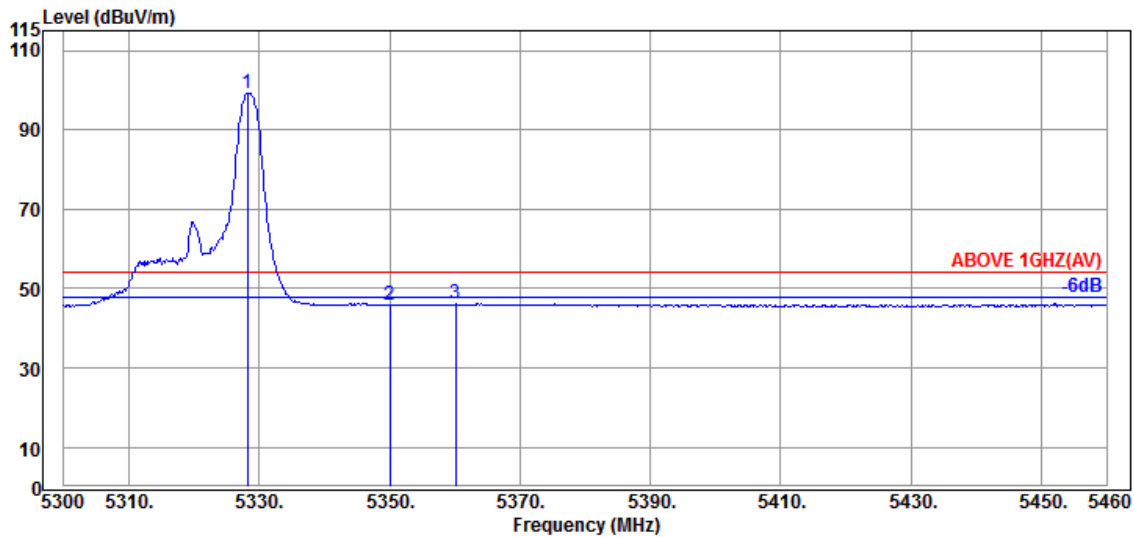


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160 | 34.73 | 8.99 | 34.26 | 89.71 | 99.17 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.19 | 45.82 | 54.00 | 8.18 | Average |
| 5360.160 | 34.87 | 9.00 | 34.26 | 36.54 | 46.15 | 54.00 | 7.85 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 52/40 | Frequency | TX 5320MHz |

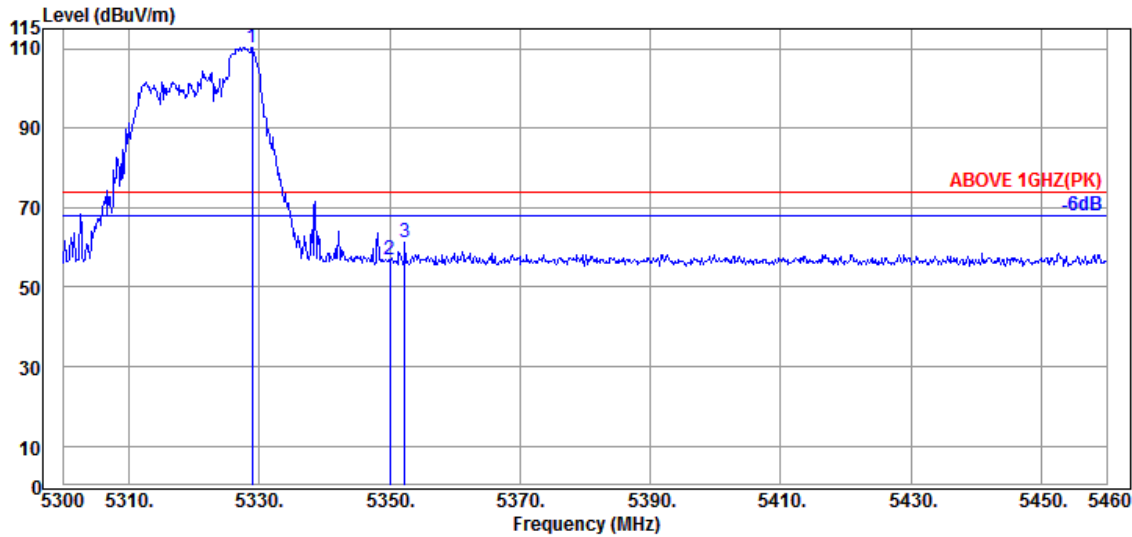

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.960 | 34.73 | 8.99 | 34.26 | 100.98 | 110.44 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 47.36 | 56.99 | 74.00 | 17.01 | Peak |
| 5352.320 | 34.90 | 8.99 | 34.26 | 51.80 | 61.43 | 74.00 | 12.57 | Peak |

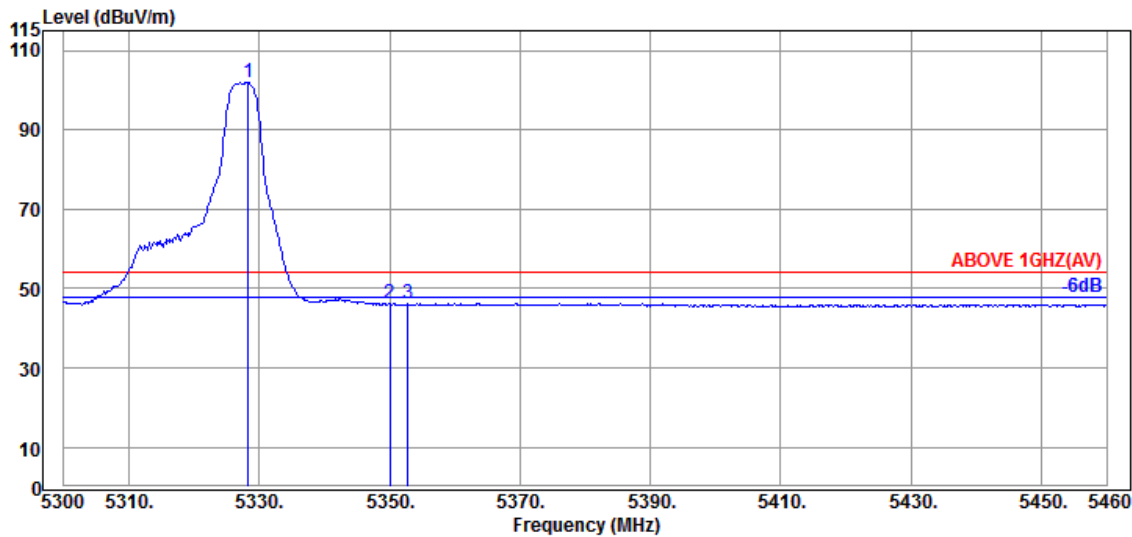


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.320 | 34.73 | 8.99 | 34.26 | 92.42 | 101.88 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.43 | 46.06 | 54.00 | 7.94 | Average |
| 5352.800 | 34.90 | 8.99 | 34.26 | 36.63 | 46.26 | 54.00 | 7.74 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 52/40 | Frequency | TX 5320MHz |

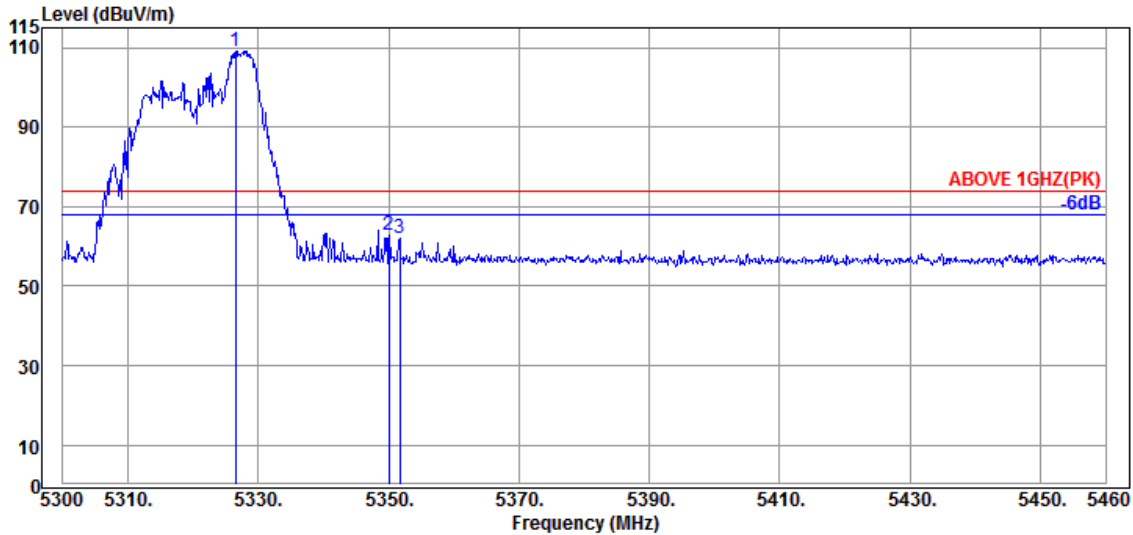

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5326.560 | 34.73 | 8.99 | 34.27 | 99.81 | 109.26 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 53.32 | 62.95 | 74.00 | 11.05 | Peak |
| 5351.680 | 34.90 | 8.99 | 34.26 | 52.61 | 62.24 | 74.00 | 11.76 | Peak |

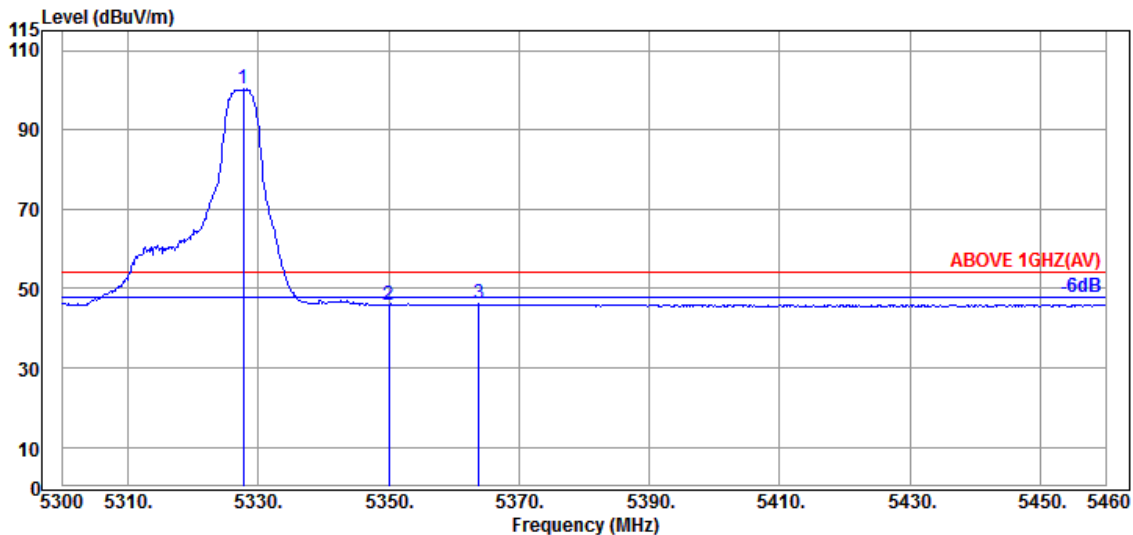


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.680 | 34.73 | 8.99 | 34.27 | 90.77 | 100.22 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.30 | 45.93 | 54.00 | 8.07 | Average |
| 5363.840 | 34.87 | 9.00 | 34.25 | 36.49 | 46.11 | 54.00 | 7.89 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 106/54 | Frequency | TX 5320MHz |

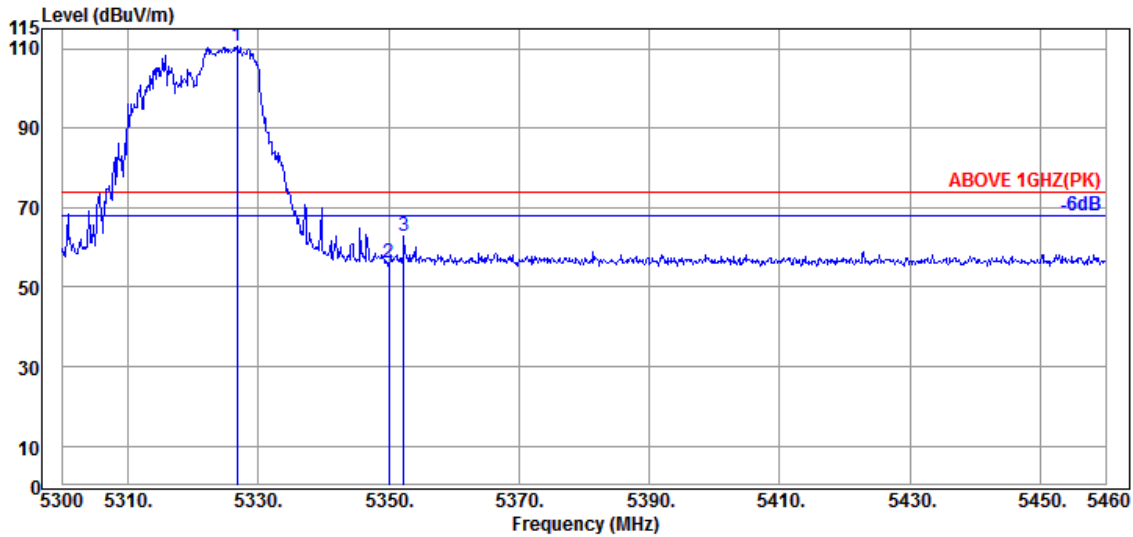

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5326.720 | 34.73 | 8.99 | 34.27 | 101.14 | 110.59 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 46.47 | 56.10 | 74.00 | 17.90 | Peak |
| 5352.320 | 34.90 | 8.99 | 34.26 | 53.23 | 62.86 | 74.00 | 11.14 | Peak |

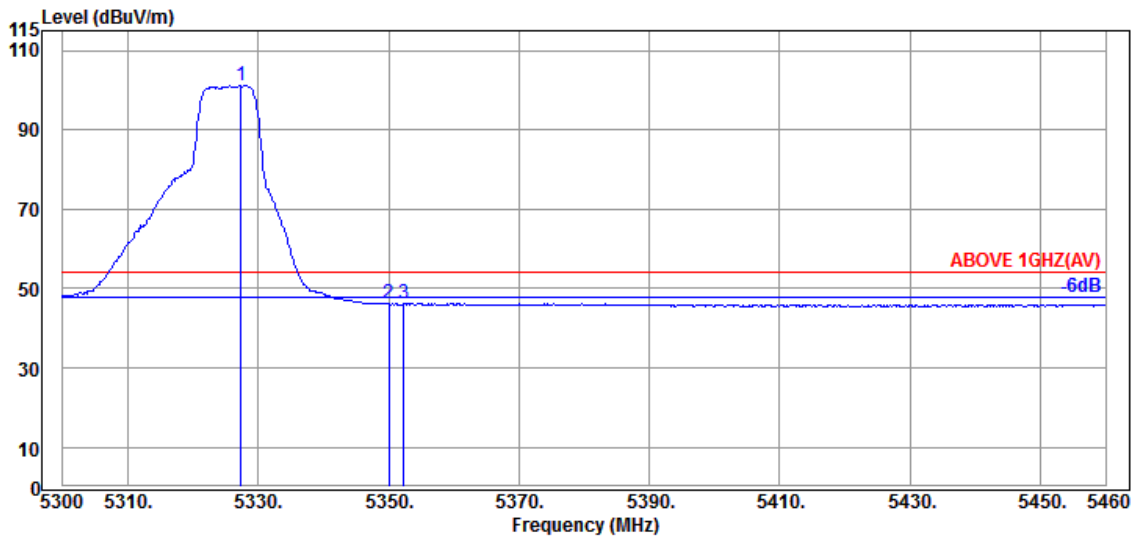


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.360 | 34.73 | 8.99 | 34.27 | 91.70 | 101.15 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.52 | 46.15 | 54.00 | 7.85 | Average |
| 5352.320 | 34.90 | 8.99 | 34.26 | 36.73 | 46.36 | 54.00 | 7.64 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 106/54 | Frequency | TX 5320MHz |

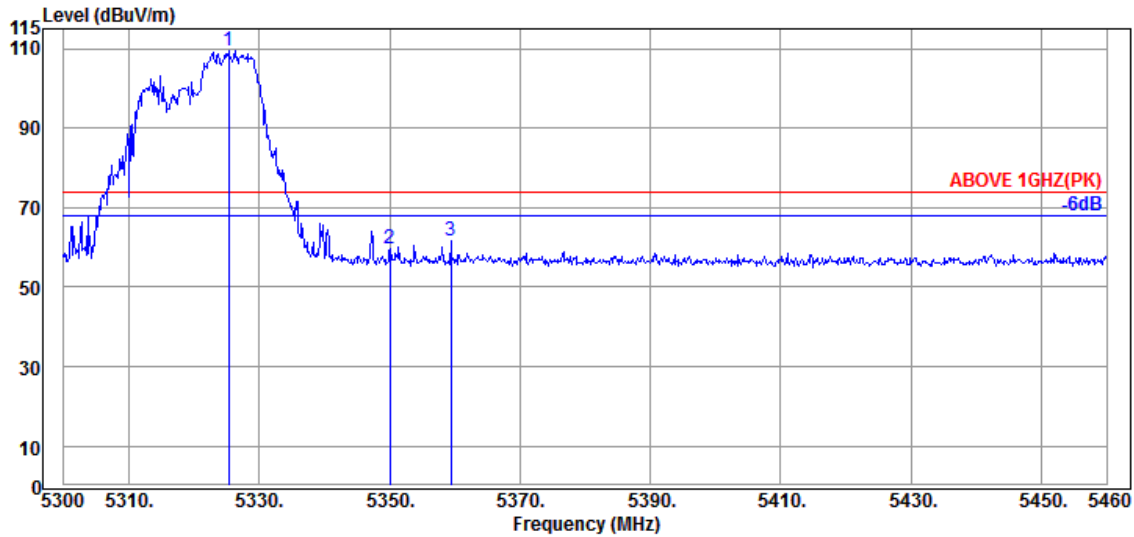

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5325.280 | 34.73 | 8.99 | 34.27 | 99.85 | 109.30 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 49.96 | 59.59 | 74.00 | 14.41 | Peak |
| 5359.360 | 34.87 | 9.00 | 34.26 | 52.10 | 61.71 | 74.00 | 12.29 | Peak |

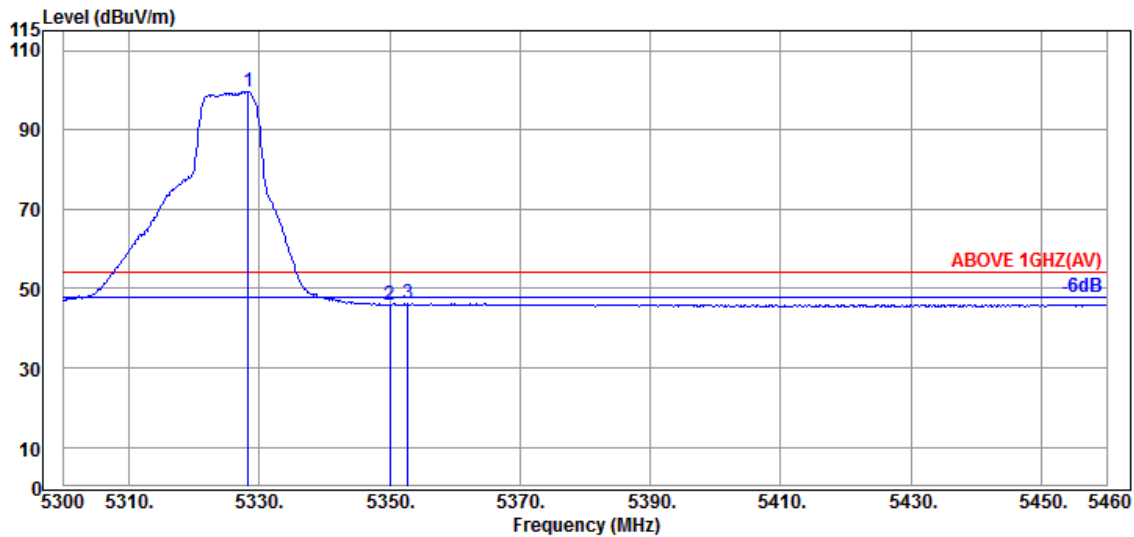


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.320 | 34.73 | 8.99 | 34.26 | 90.31 | 99.77 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.29 | 45.92 | 54.00 | 8.08 | Average |
| 5352.800 | 34.90 | 8.99 | 34.26 | 36.59 | 46.22 | 54.00 | 7.78 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/0 | Frequency | TX 5500MHz |

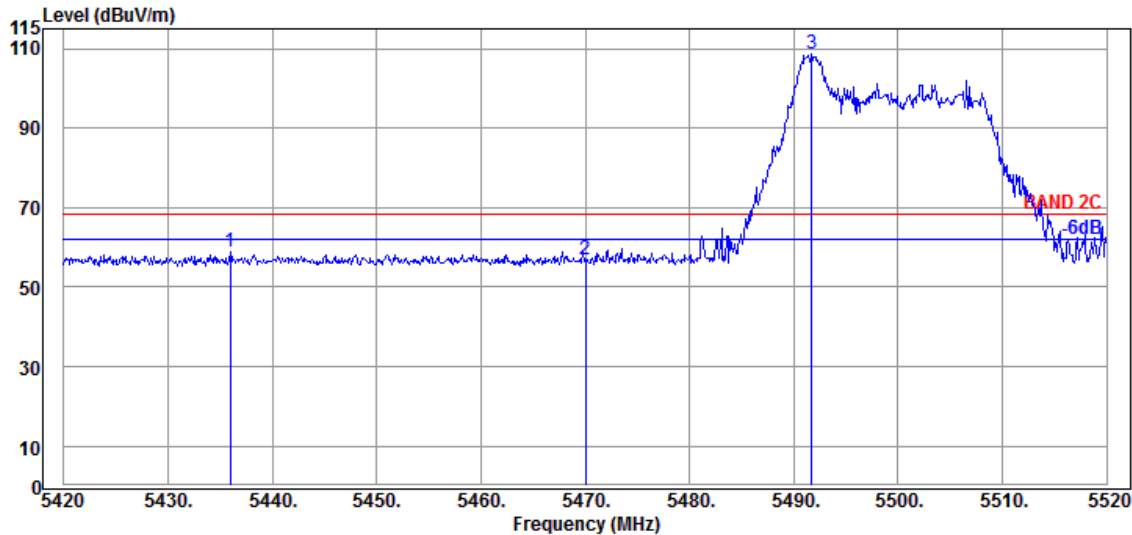

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5436.000 | 34.65 | 9.04 | 34.22 | 49.57 | 59.04 | 68.20 | 9.16 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 47.42 | 56.90 | 68.20 | 11.30 | Peak |
| @ 5491.700 | 34.67 | 9.07 | 34.20 | 99.06 | 108.60 | --- | --- | Peak |

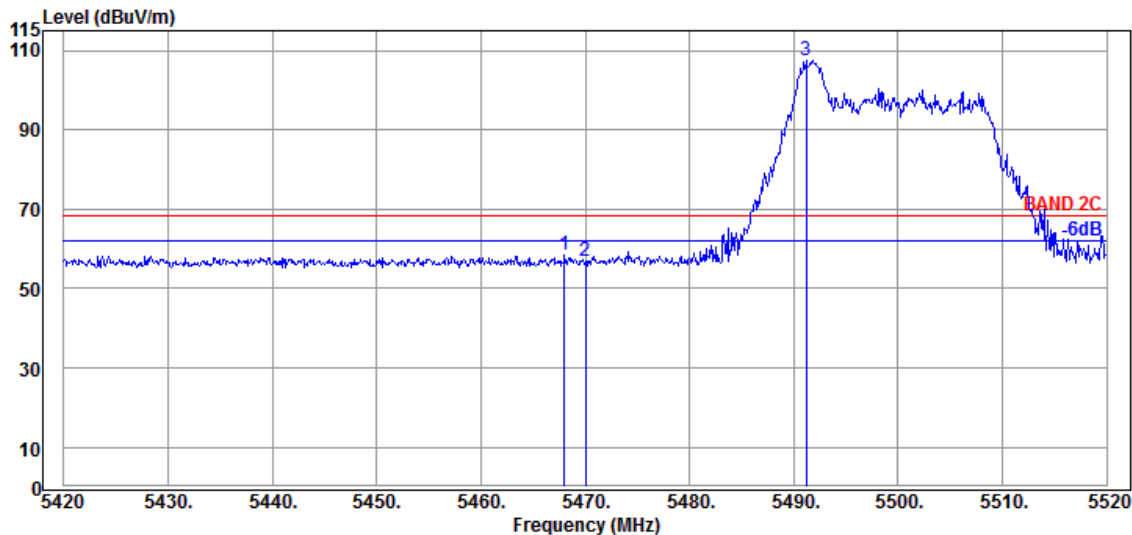


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.000 | 34.63 | 9.06 | 34.21 | 49.05 | 58.53 | 68.20 | 9.67 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 47.27 | 56.75 | 68.20 | 11.45 | Peak |
| @ 5491.200 | 34.67 | 9.07 | 34.20 | 97.91 | 107.45 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/0 | Frequency | TX 5500MHz |

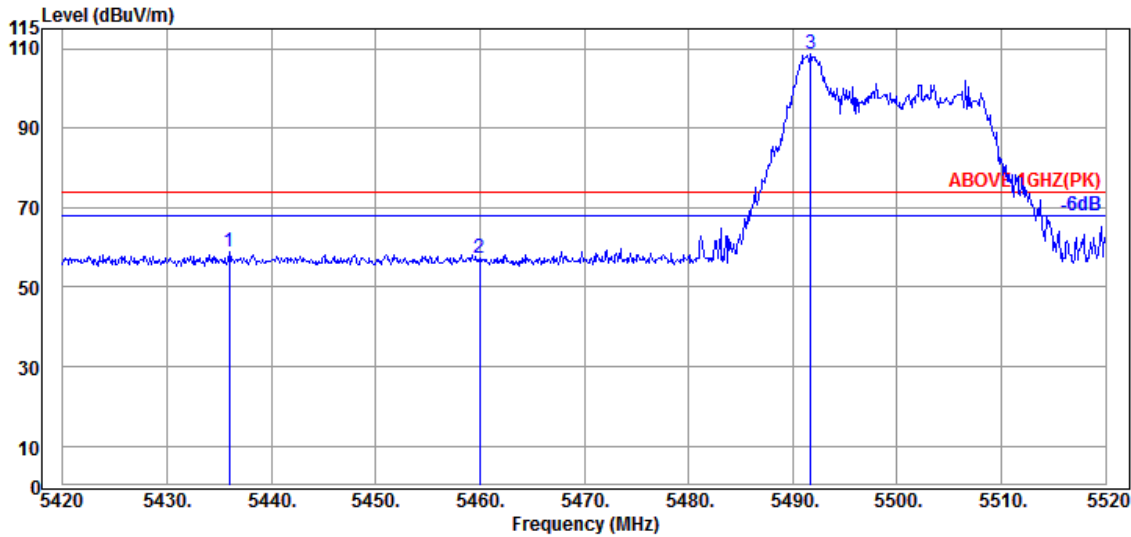

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5436.000 | 34.65 | 9.04 | 34.22 | 49.57 | 59.04 | 74.00 | 14.96 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.69 | 57.13 | 74.00 | 16.87 | Peak |
| @ 5491.700 | 34.67 | 9.07 | 34.20 | 99.06 | 108.60 | --- | --- | Peak |

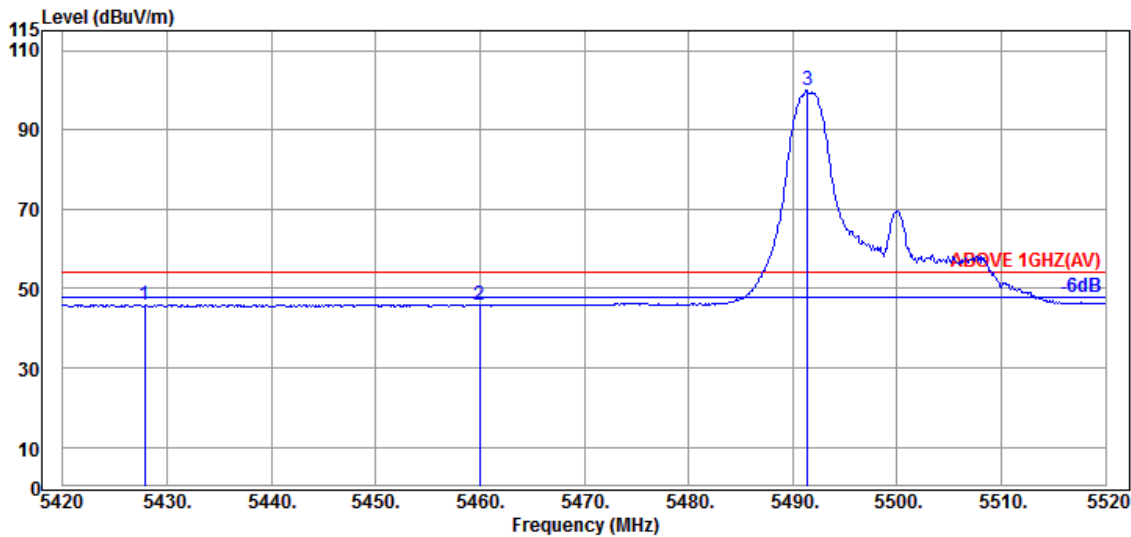


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5427.900 | 34.70 | 9.04 | 34.23 | 36.44 | 45.95 | 54.00 | 8.05 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.34 | 45.78 | 54.00 | 8.22 | Average |
| @ 5491.400 | 34.67 | 9.07 | 34.20 | 90.40 | 99.94 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/0 | Frequency | TX 5500MHz |

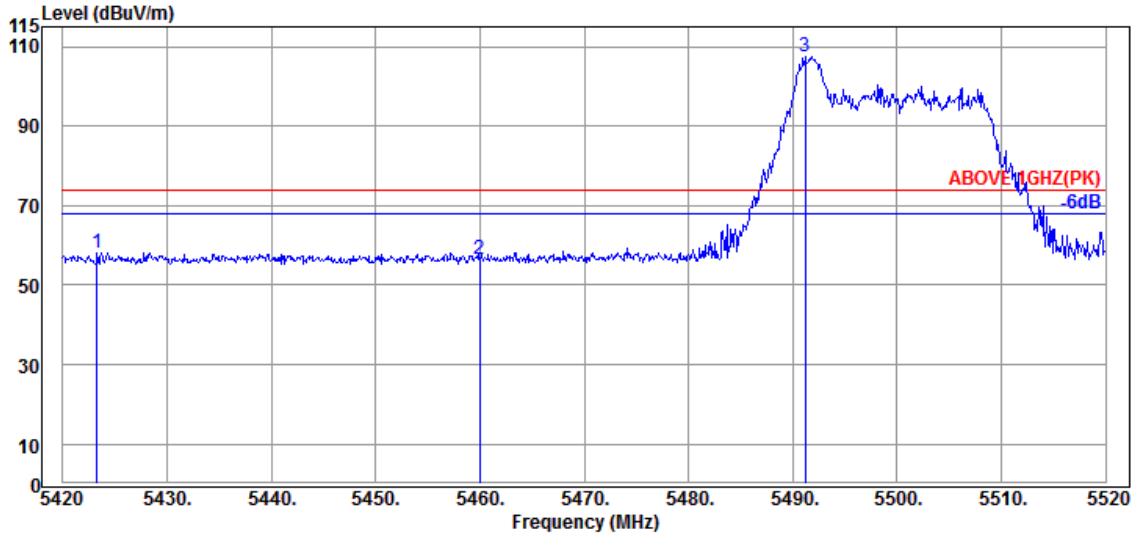

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5423.300 | 34.70 | 9.04 | 34.23 | 48.72 | 58.23 | 74.00 | 15.77 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.16 | 56.60 | 74.00 | 17.40 | Peak |
| @ 5491.200 | 34.67 | 9.07 | 34.20 | 97.91 | 107.45 | --- | --- | Peak |

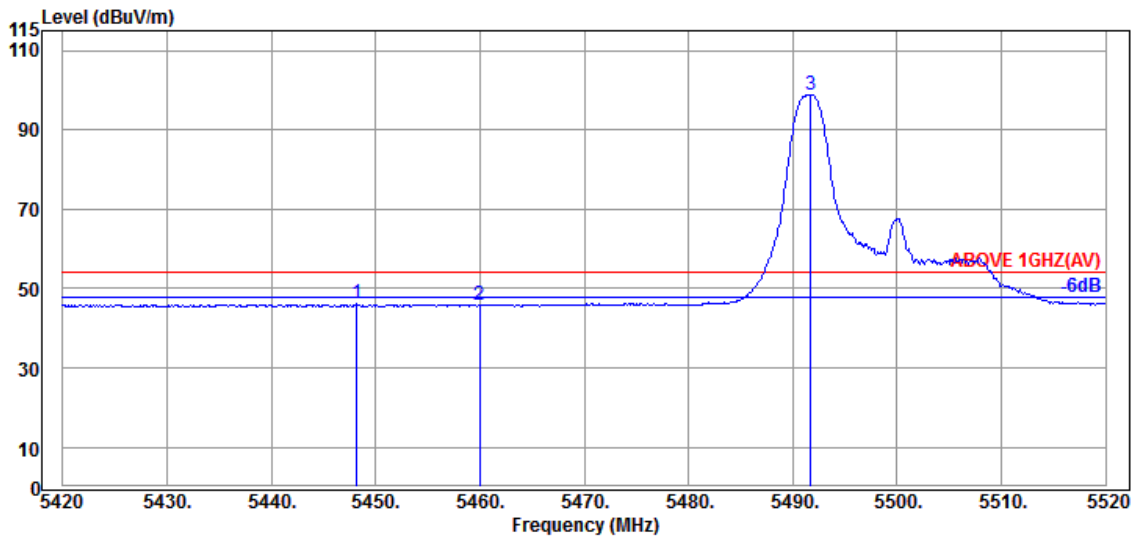


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5448.200 | 34.60 | 9.05 | 34.22 | 36.71 | 46.14 | 54.00 | 7.86 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.42 | 45.86 | 54.00 | 8.14 | Average |
| @ 5491.700 | 34.67 | 9.07 | 34.20 | 89.33 | 98.87 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/37 | Frequency | TX 5500MHz |

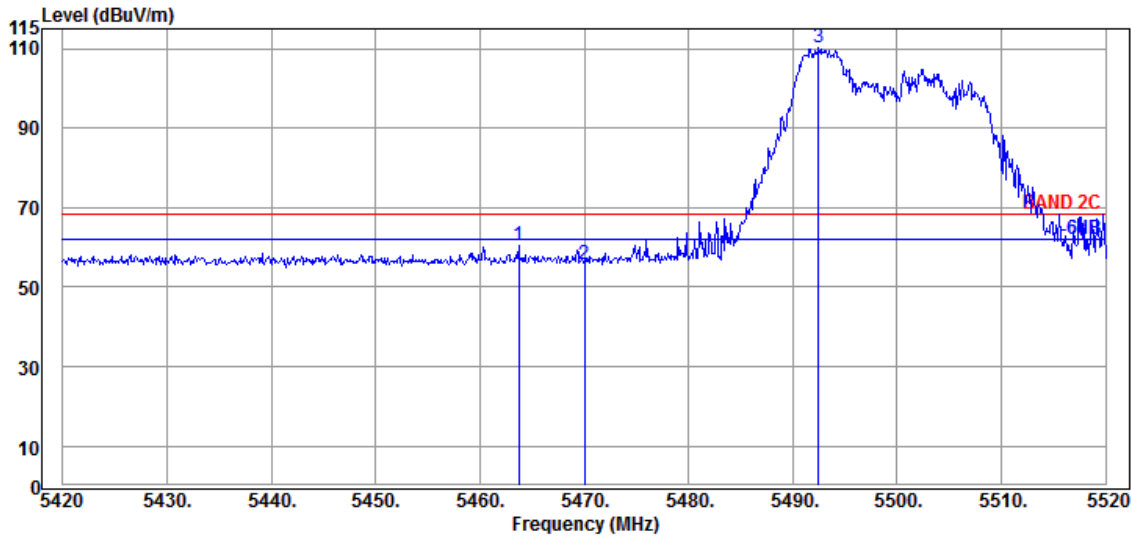

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5463.700 | 34.63 | 9.06 | 34.21 | 50.80 | 60.28 | 68.20 | 7.92 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 46.43 | 55.91 | 68.20 | 12.29 | Peak |
| @ 5492.500 | 34.67 | 9.07 | 34.20 | 100.85 | 110.39 | --- | --- | Peak |

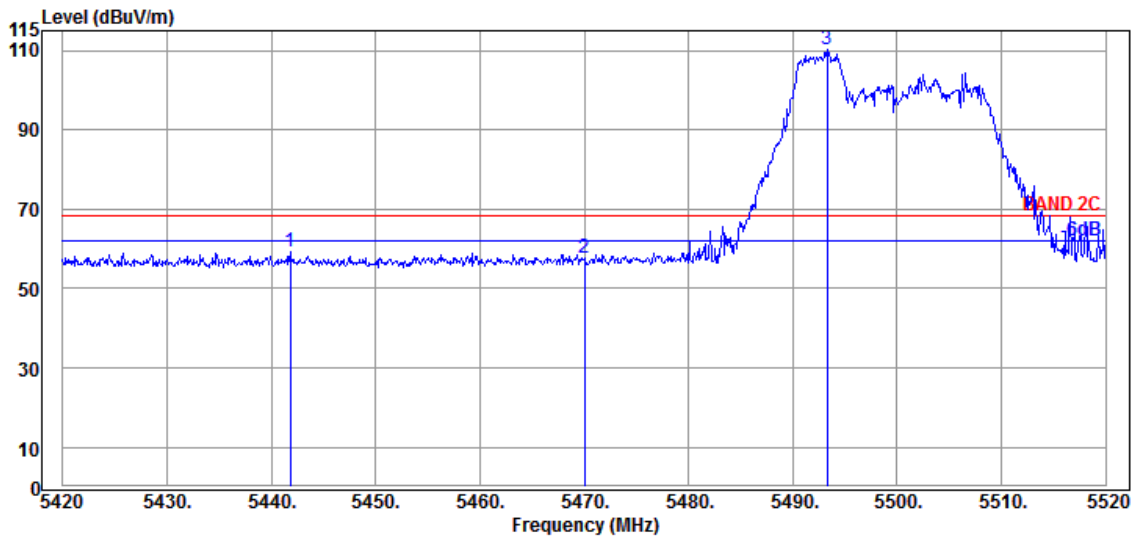


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5441.800 | 34.65 | 9.04 | 34.22 | 49.65 | 59.12 | 68.20 | 9.08 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 48.02 | 57.50 | 68.20 | 10.70 | Peak |
| @ 5493.300 | 34.67 | 9.07 | 34.20 | 100.85 | 110.39 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/37 | Frequency | TX 5500MHz |

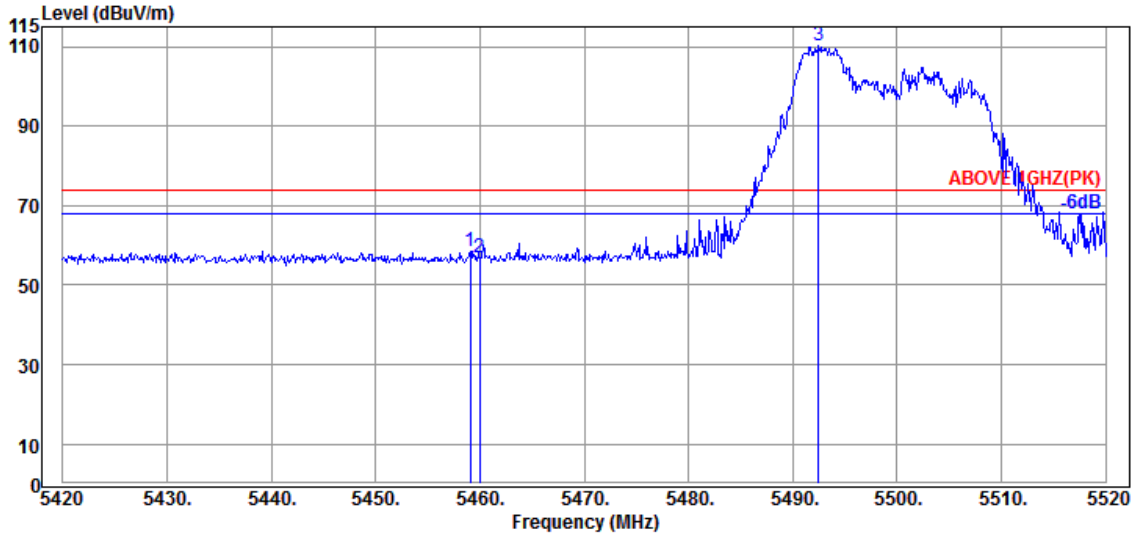

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.100 | 34.60 | 9.05 | 34.21 | 49.17 | 58.61 | 74.00 | 15.39 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.32 | 56.76 | 74.00 | 17.24 | Peak |
| @ 5492.500 | 34.67 | 9.07 | 34.20 | 100.85 | 110.39 | --- | --- | Peak |

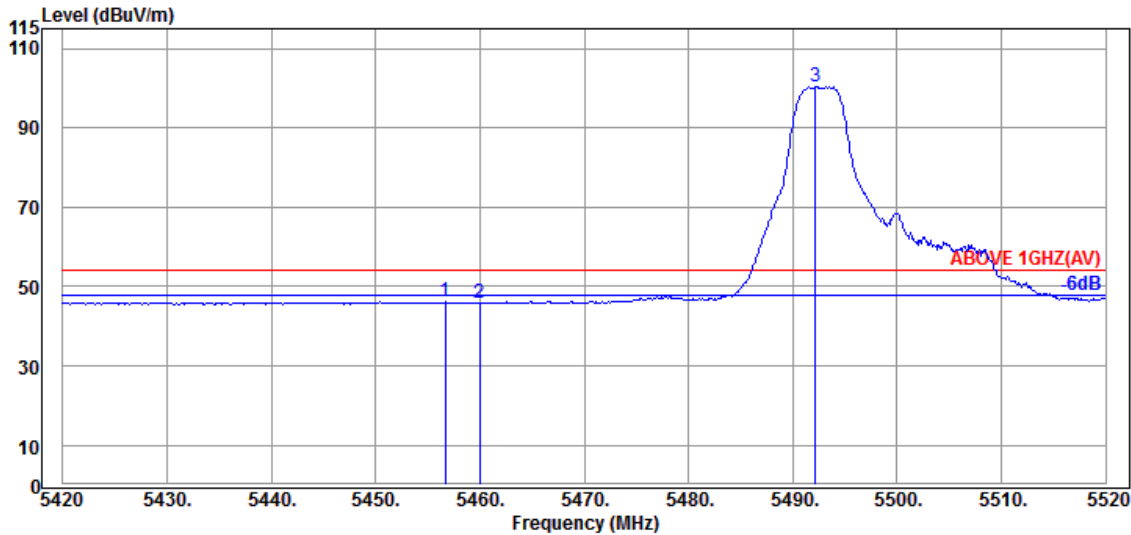


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5456.700 | 34.60 | 9.05 | 34.21 | 36.62 | 46.06 | 54.00 | 7.94 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.32 | 45.76 | 54.00 | 8.24 | Average |
| @ 5492.200 | 34.67 | 9.07 | 34.20 | 90.82 | 100.36 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/37 | Frequency | TX 5500MHz |

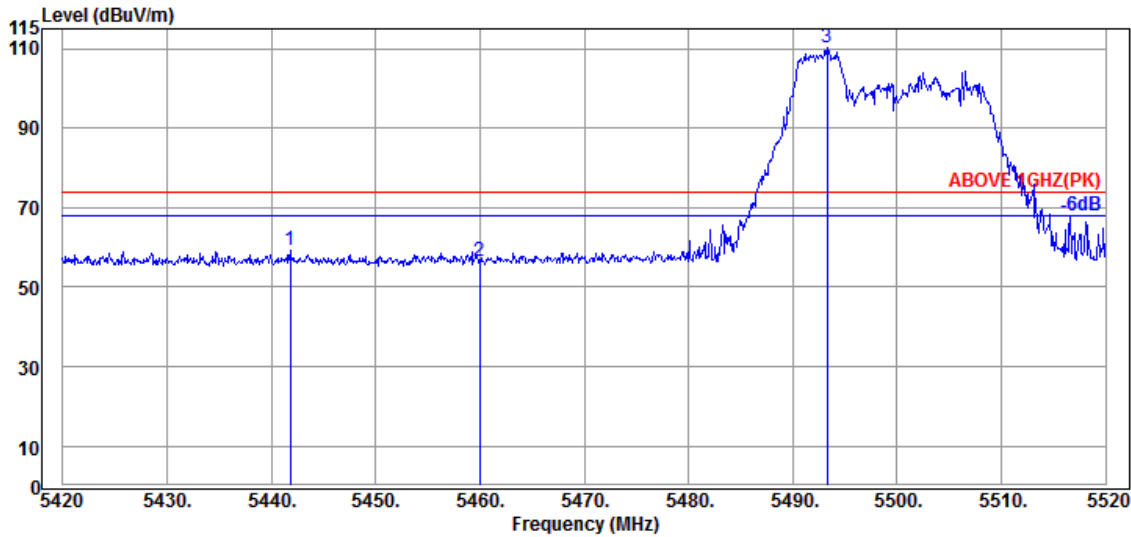

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5441.800 | 34.65 | 9.04 | 34.22 | 49.65 | 59.12 | 74.00 | 14.88 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.26 | 56.70 | 74.00 | 17.30 | Peak |
| @ 5493.300 | 34.67 | 9.07 | 34.20 | 100.85 | 110.39 | --- | --- | Peak |

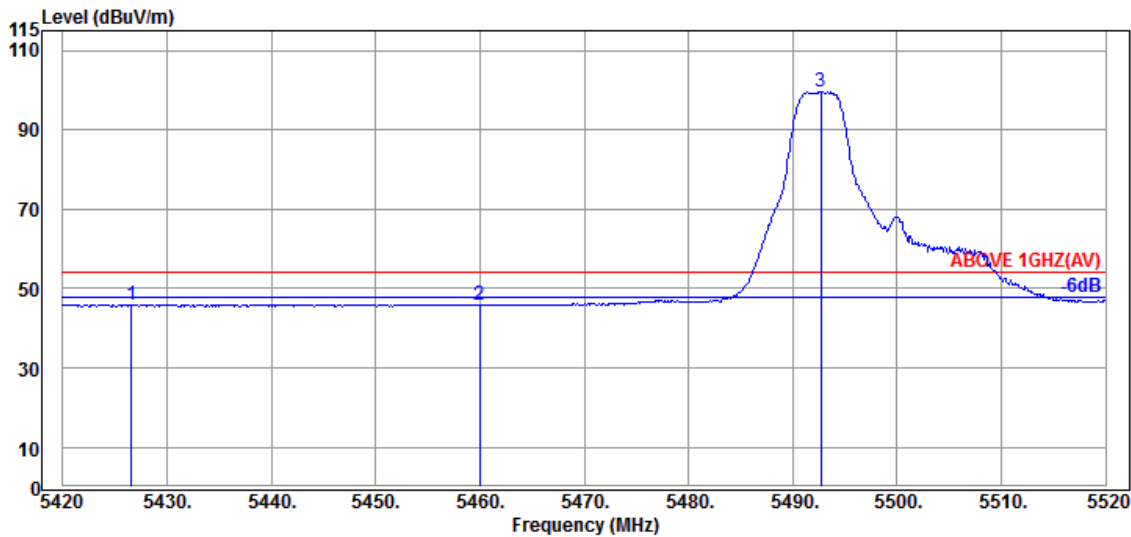


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5426.600 | 34.70 | 9.04 | 34.23 | 36.52 | 46.03 | 54.00 | 7.97 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.45 | 45.89 | 54.00 | 8.11 | Average |
| @ 5492.700 | 34.67 | 9.07 | 34.20 | 90.01 | 99.55 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/53 | Frequency | TX 5500MHz |

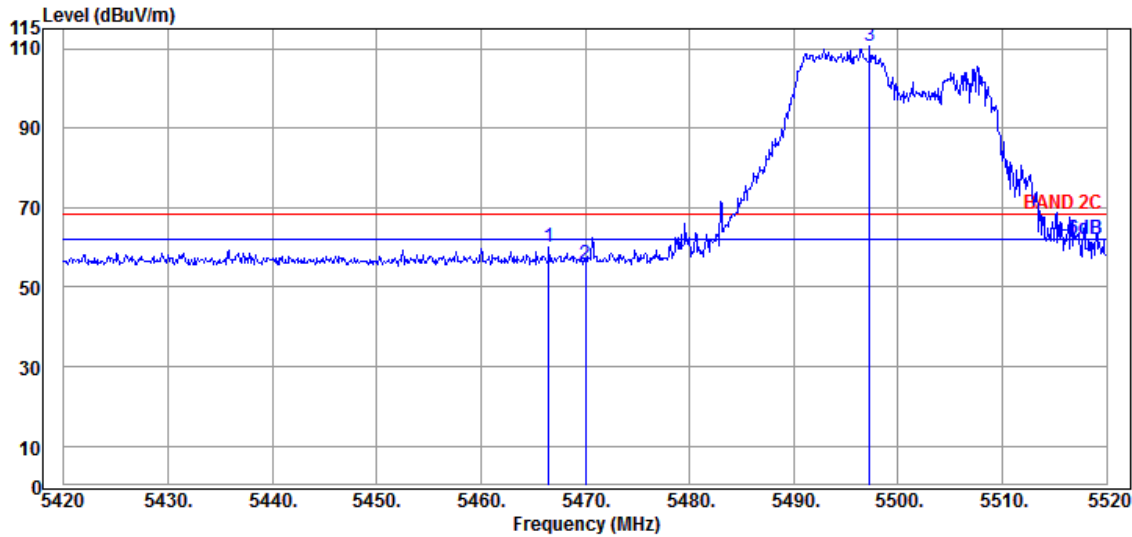

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.500 | 34.63 | 9.06 | 34.21 | 50.61 | 60.09 | 68.20 | 8.11 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 46.34 | 55.82 | 68.20 | 12.38 | Peak |
| @ 5497.300 | 34.70 | 9.08 | 34.20 | 100.89 | 110.47 | --- | --- | Peak |

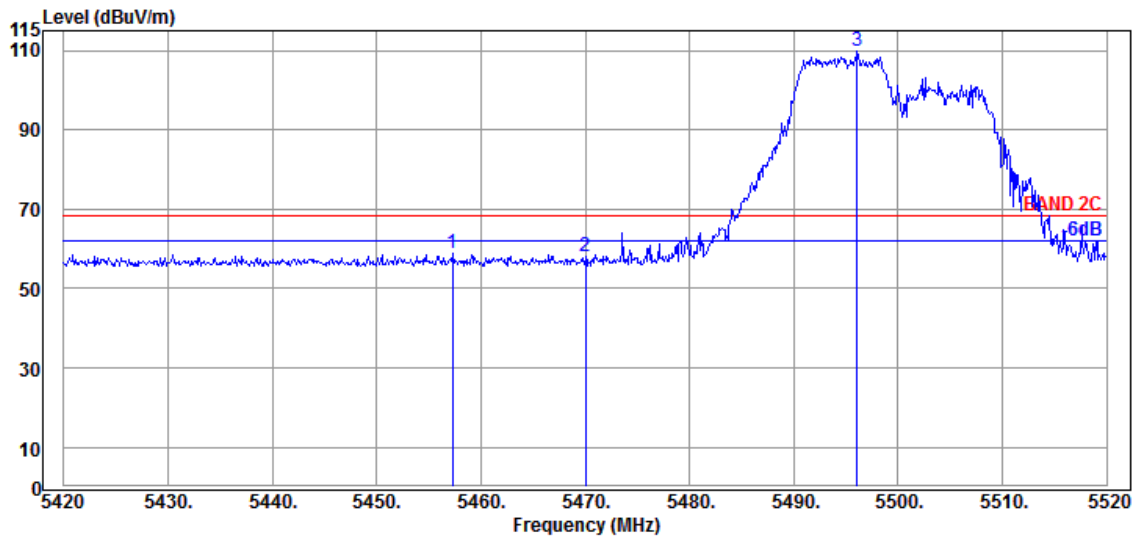


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.300 | 34.60 | 9.05 | 34.21 | 49.62 | 59.06 | 68.20 | 9.14 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 48.66 | 58.14 | 68.20 | 10.06 | Peak |
| @ 5496.100 | 34.70 | 9.08 | 34.20 | 100.12 | 109.70 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/53 | Frequency | TX 5500MHz |

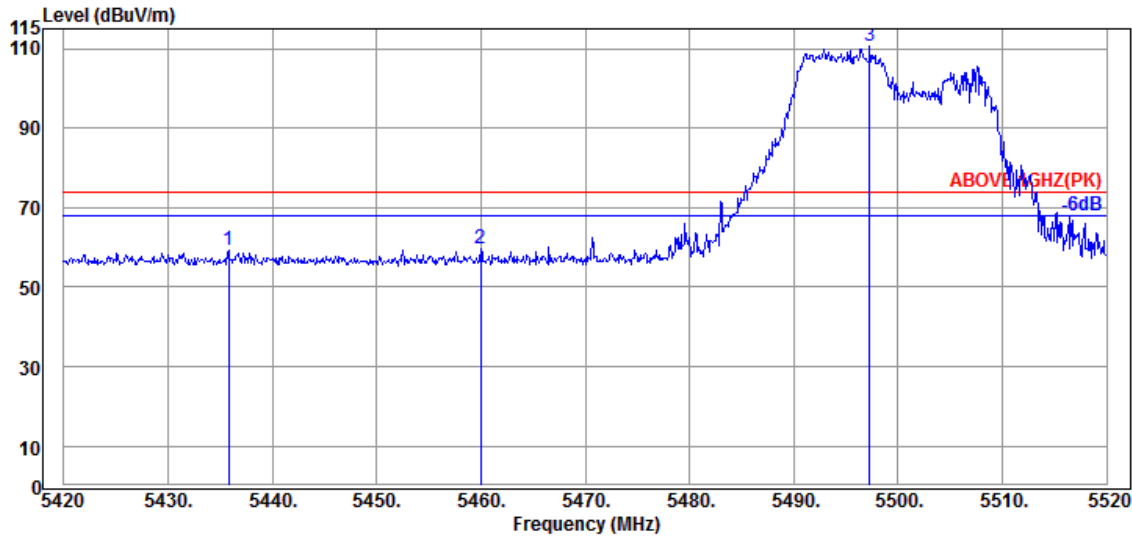

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5435.800 | 34.65 | 9.04 | 34.22 | 49.78 | 59.25 | 74.00 | 14.75 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 50.04 | 59.48 | 74.00 | 14.52 | Peak |
| @ 5497.300 | 34.70 | 9.08 | 34.20 | 100.89 | 110.47 | --- | --- | Peak |

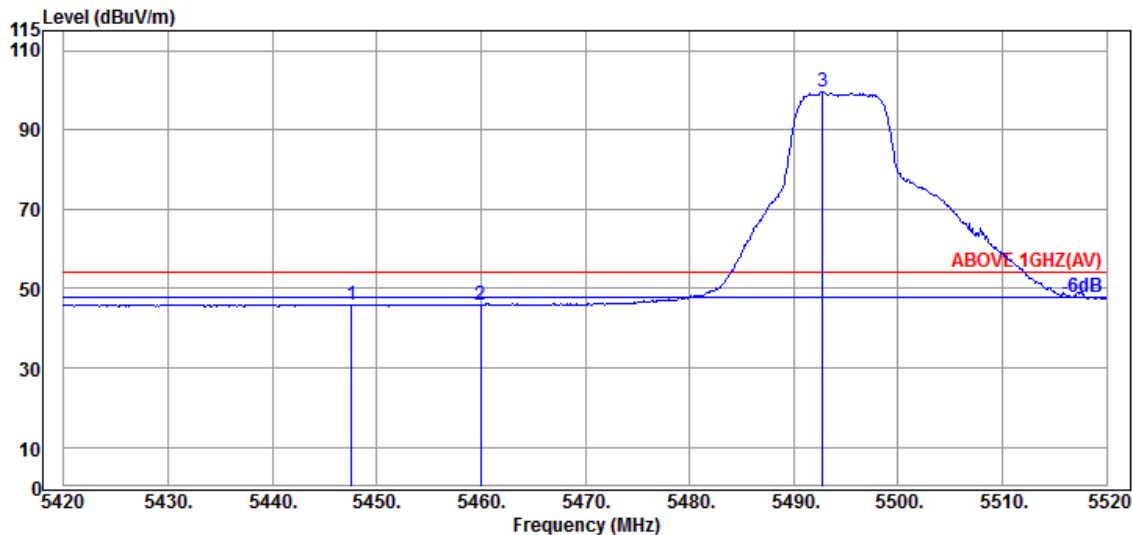


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5447.600 | 34.65 | 9.04 | 34.22 | 36.57 | 46.04 | 54.00 | 7.96 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.45 | 45.89 | 54.00 | 8.11 | Average |
| @ 5492.800 | 34.67 | 9.07 | 34.20 | 89.97 | 99.51 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/53 | Frequency | TX 5500MHz |

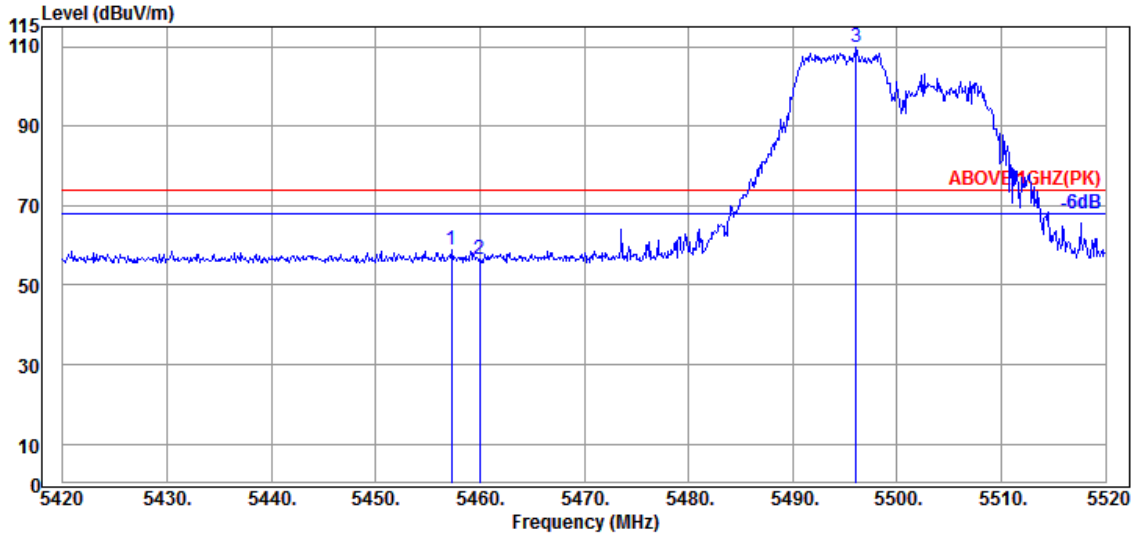

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.300 | 34.60 | 9.05 | 34.21 | 49.62 | 59.06 | 74.00 | 14.94 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.03 | 56.47 | 74.00 | 17.53 | Peak |
| @ 5496.100 | 34.70 | 9.08 | 34.20 | 100.12 | 109.70 | --- | --- | Peak |

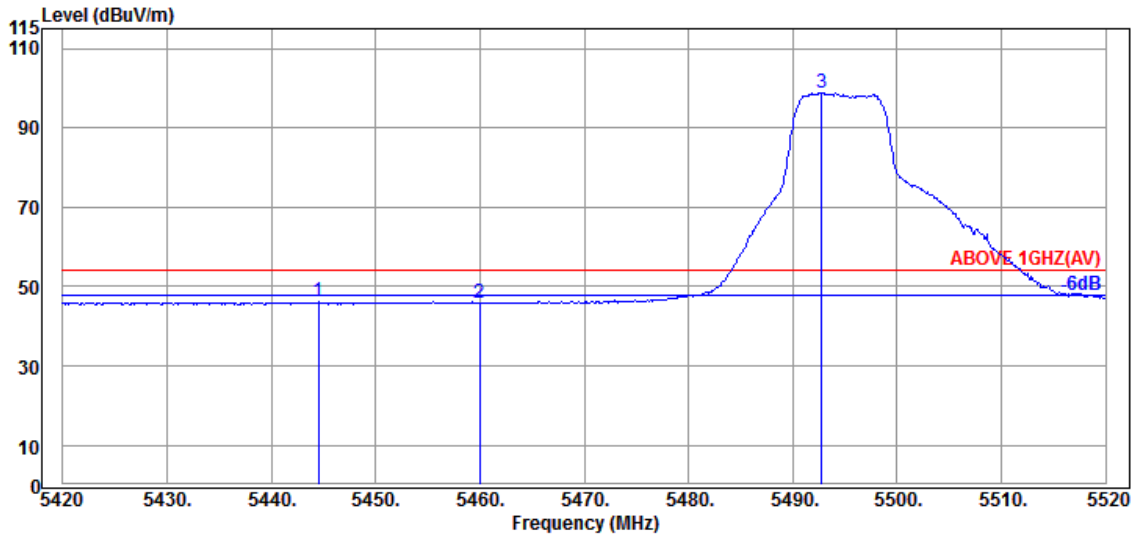


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5444.500 | 34.65 | 9.04 | 34.22 | 36.68 | 46.15 | 54.00 | 7.85 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.32 | 45.76 | 54.00 | 8.24 | Average |
| @ 5492.800 | 34.67 | 9.07 | 34.20 | 89.35 | 98.89 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/8 | Frequency | TX 5700MHz |

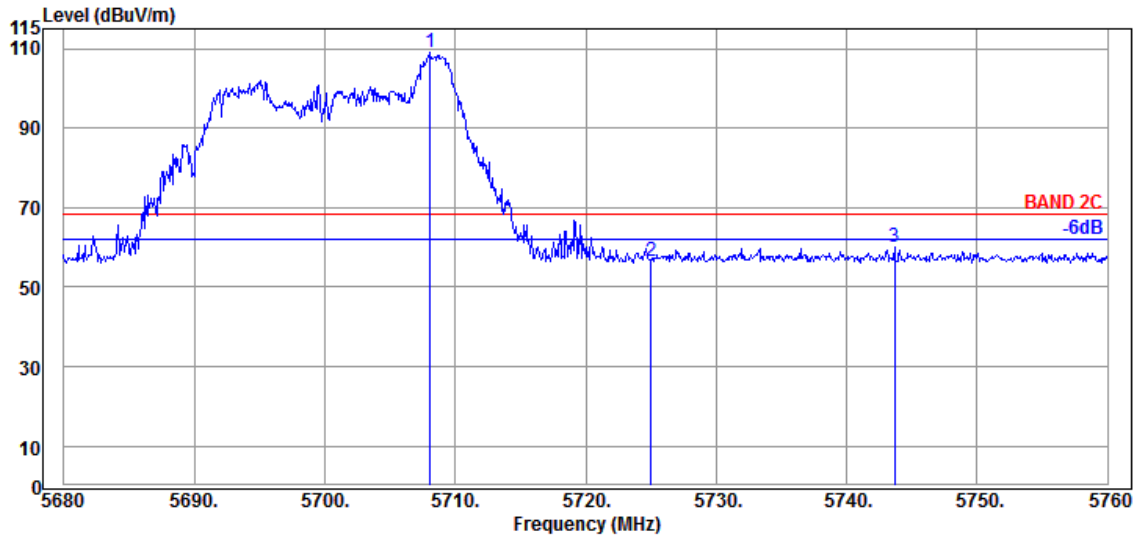

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.080 | 34.80 | 9.19 | 34.30 | 99.46 | 109.15 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 46.52 | 56.32 | 68.20 | 11.88 | Peak |
| 5743.680 | 35.00 | 9.20 | 34.31 | 50.18 | 60.07 | 68.20 | 8.13 | Peak |

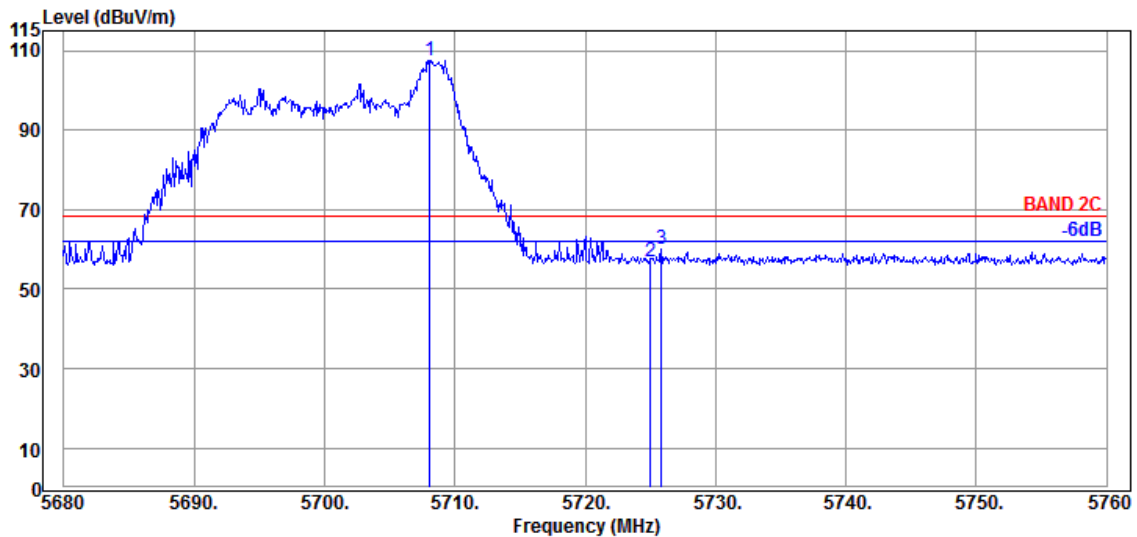


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.080 | 34.80 | 9.19 | 34.30 | 97.89 | 107.58 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 47.05 | 56.85 | 68.20 | 11.35 | Peak |
| 5725.840 | 34.90 | 9.20 | 34.30 | 50.37 | 60.17 | 68.20 | 8.03 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/40 | Frequency | TX 5700MHz |

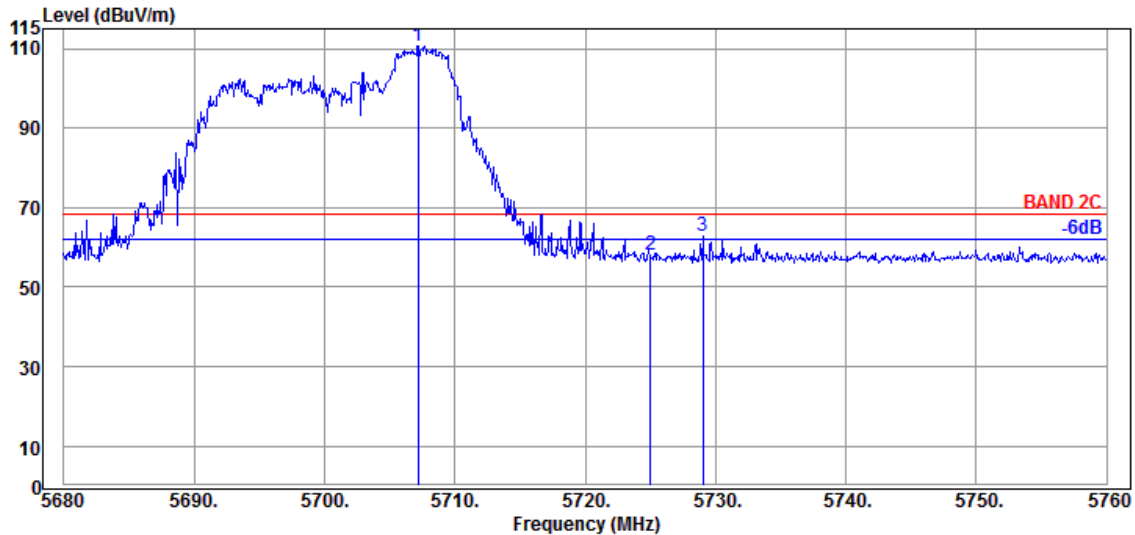

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5707.200 | 34.80 | 9.19 | 34.29 | 101.10 | 110.80 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 48.23 | 58.03 | 68.20 | 10.17 | Peak |
| 5729.040 | 34.90 | 9.20 | 34.31 | 52.96 | 62.75 | 68.20 | 5.45 | Peak |

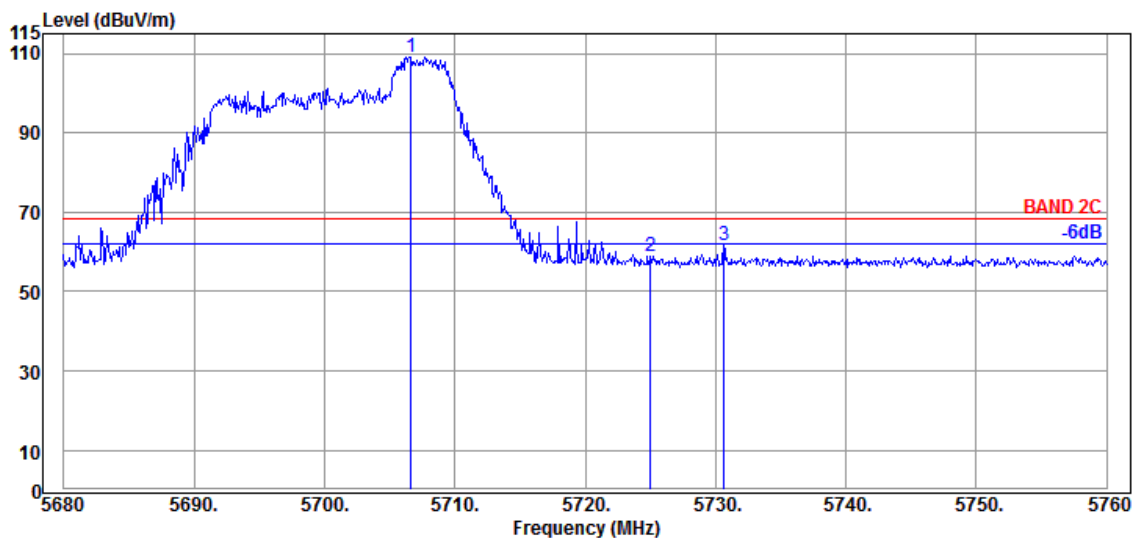


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5706.640 | 34.80 | 9.19 | 34.29 | 99.47 | 109.17 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 49.18 | 58.98 | 68.20 | 9.22 | Peak |
| 5730.640 | 34.90 | 9.20 | 34.31 | 51.69 | 61.48 | 68.20 | 6.72 | Peak |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/54 | Frequency | TX 5700MHz |

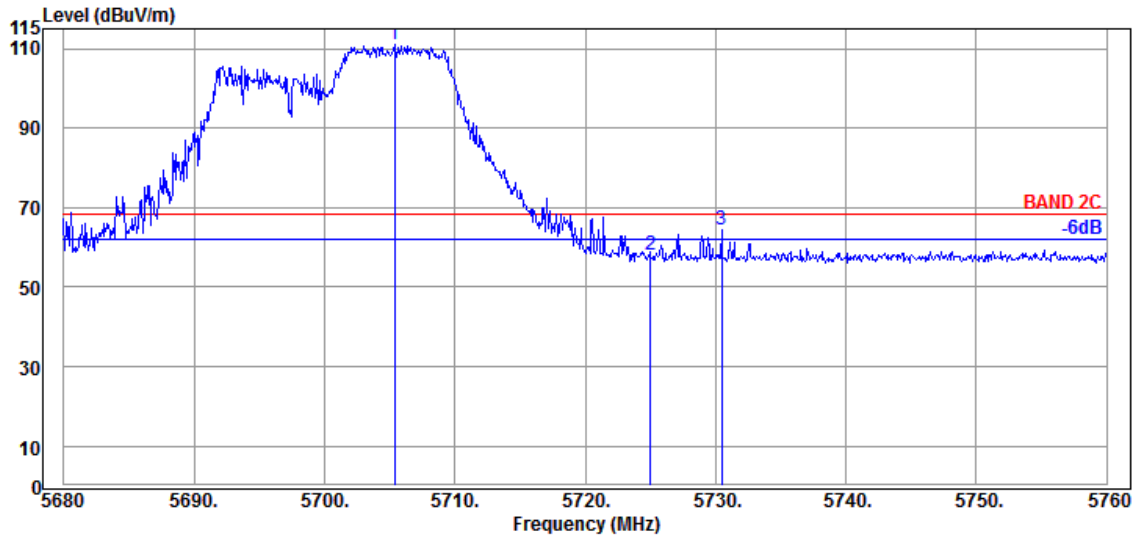

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5705.360 | 34.70 | 9.18 | 34.29 | 101.31 | 110.90 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 48.23 | 58.03 | 68.20 | 10.17 | Peak |
| 5730.480 | 34.90 | 9.20 | 34.31 | 54.71 | 64.50 | 68.20 | 3.70 | Peak |

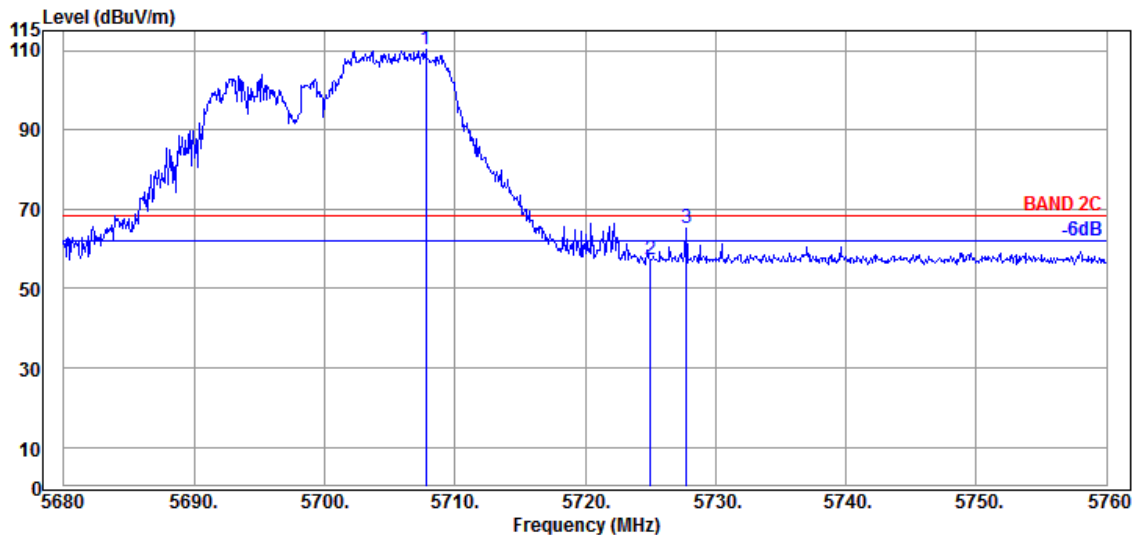


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5707.760 | 34.80 | 9.19 | 34.30 | 100.45 | 110.14 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 47.55 | 57.35 | 68.20 | 10.85 | Peak |
| 5727.760 | 34.90 | 9.20 | 34.31 | 55.36 | 65.15 | 68.20 | 3.05 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 26/0 | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

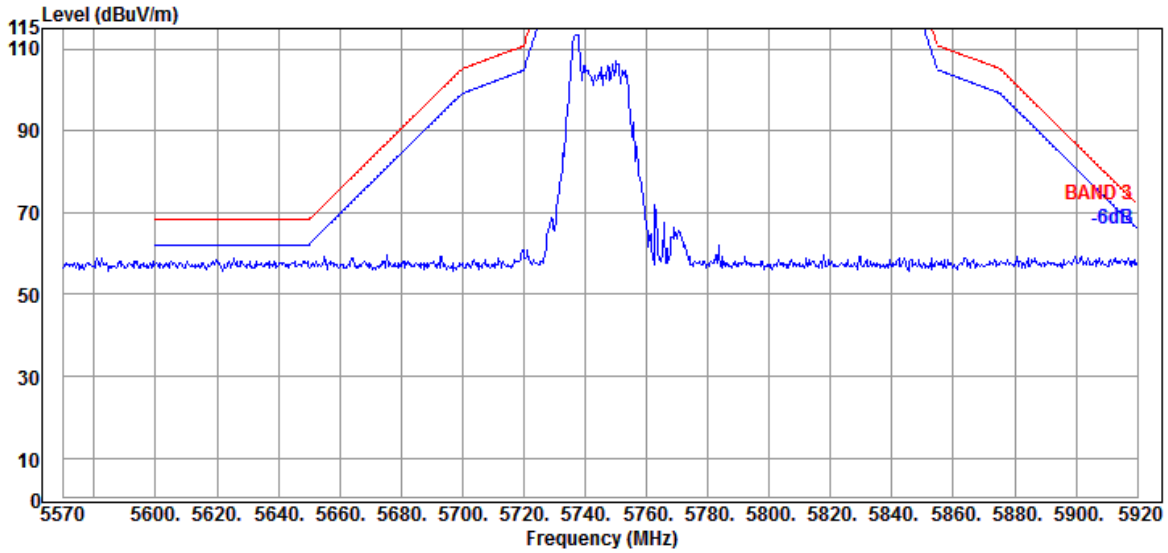


Antenna at Vertical Polarization

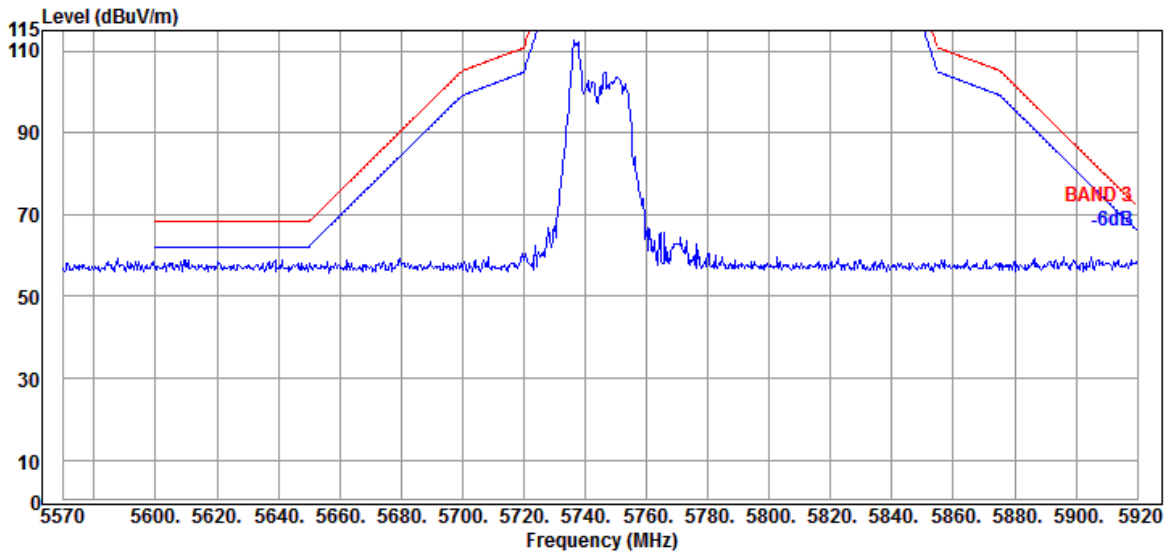


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 52/37 | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

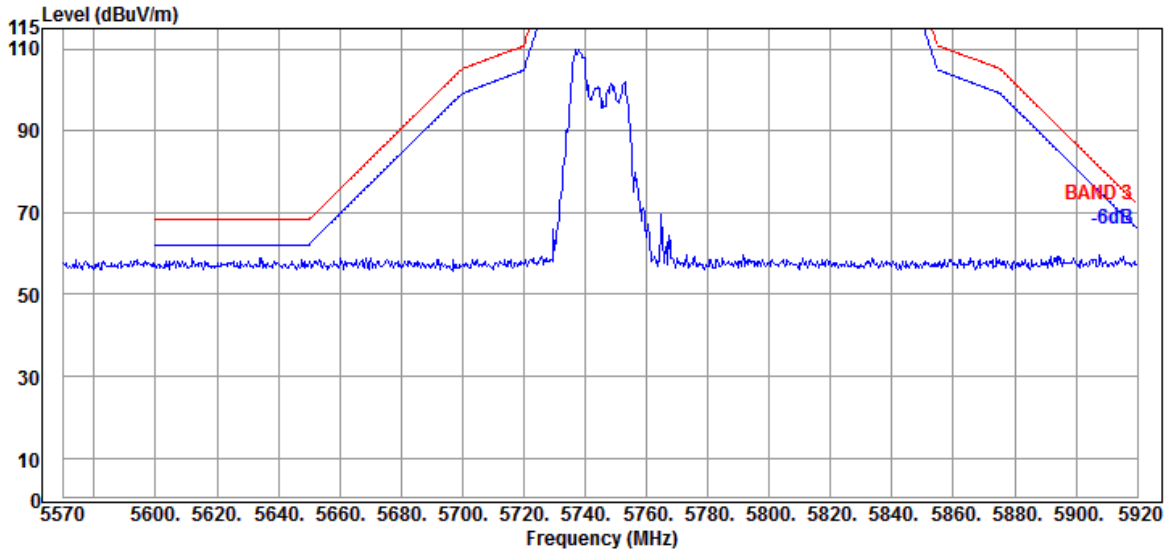


Antenna at Vertical Polarization

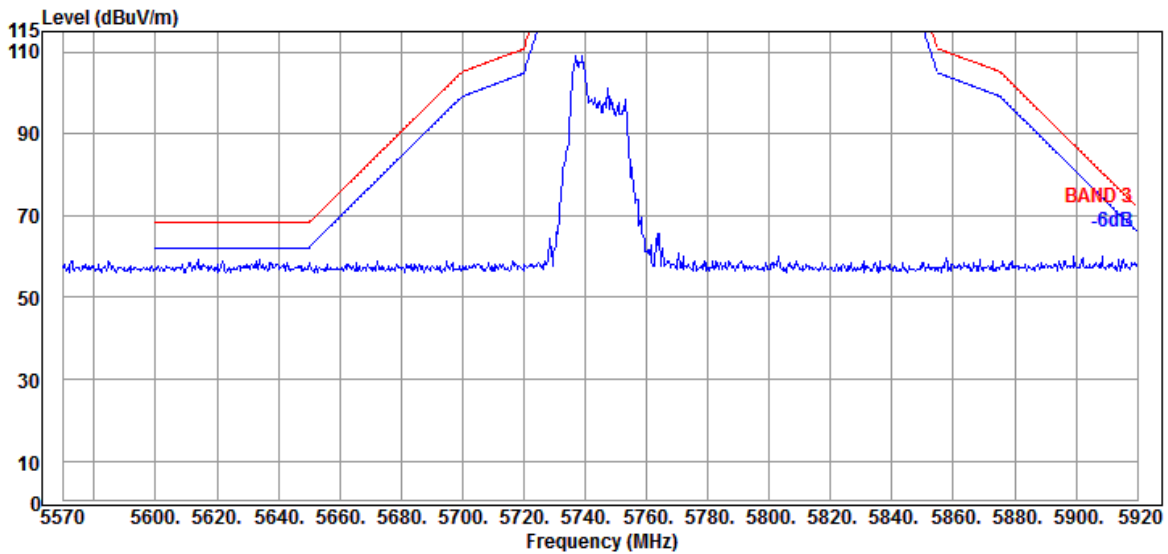


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 106/53 | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

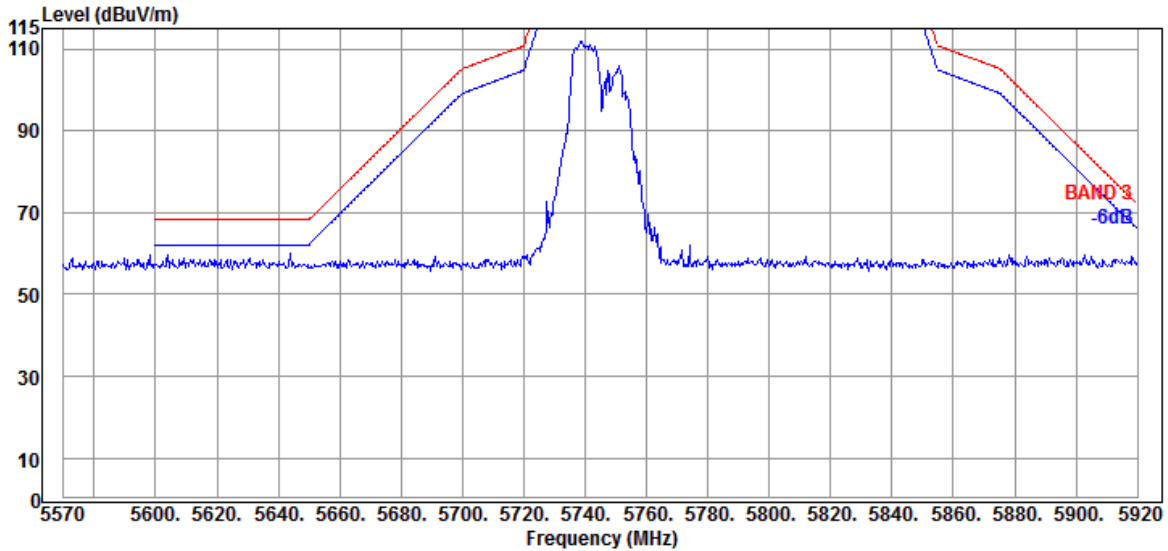


Antenna at Vertical Polarization

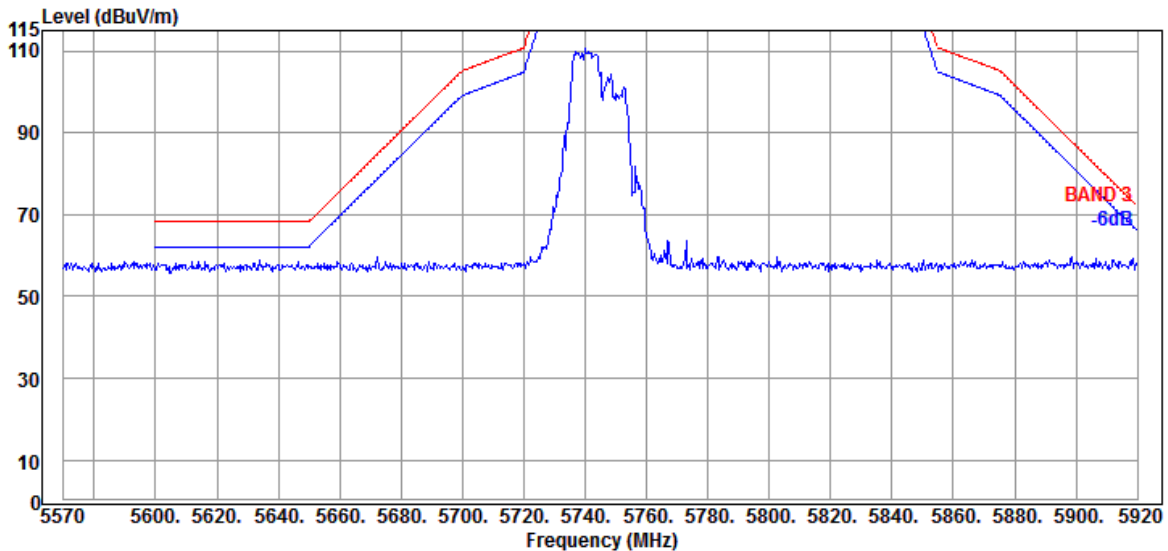


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 26/8 | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

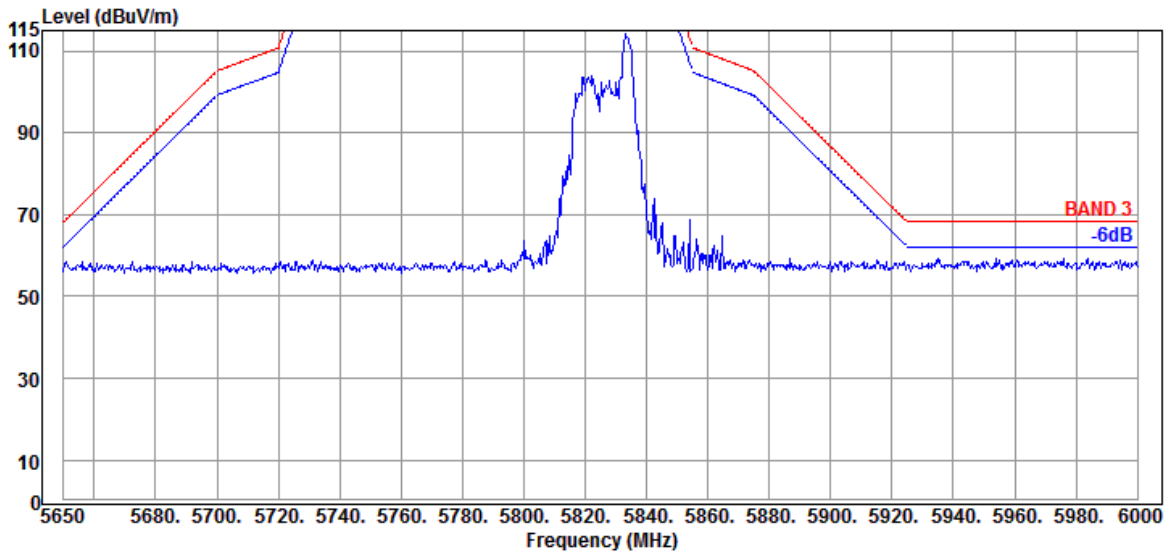


Antenna at Vertical Polarization

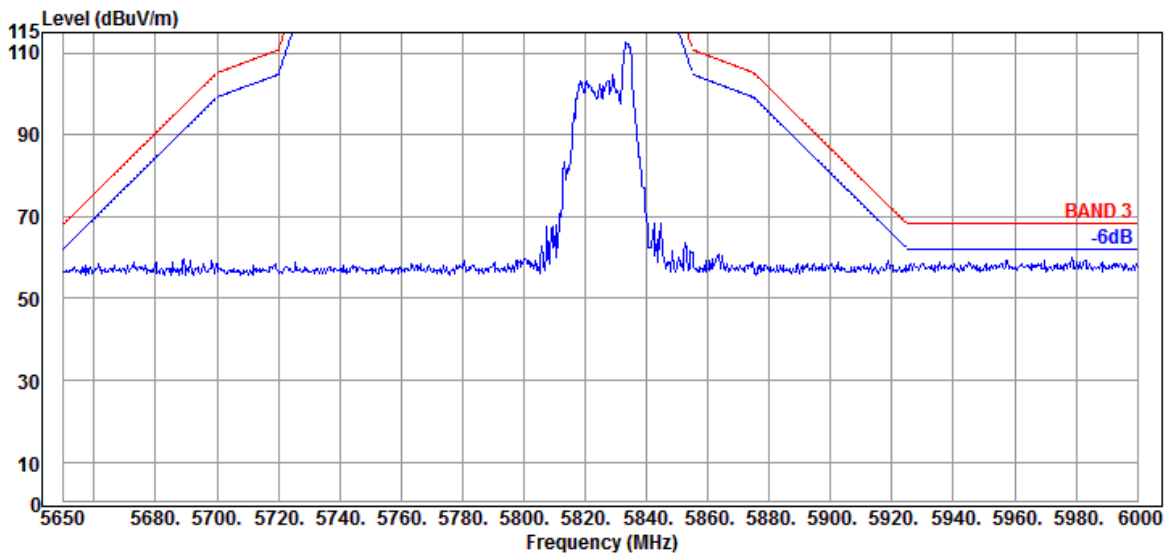


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 52/40 | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

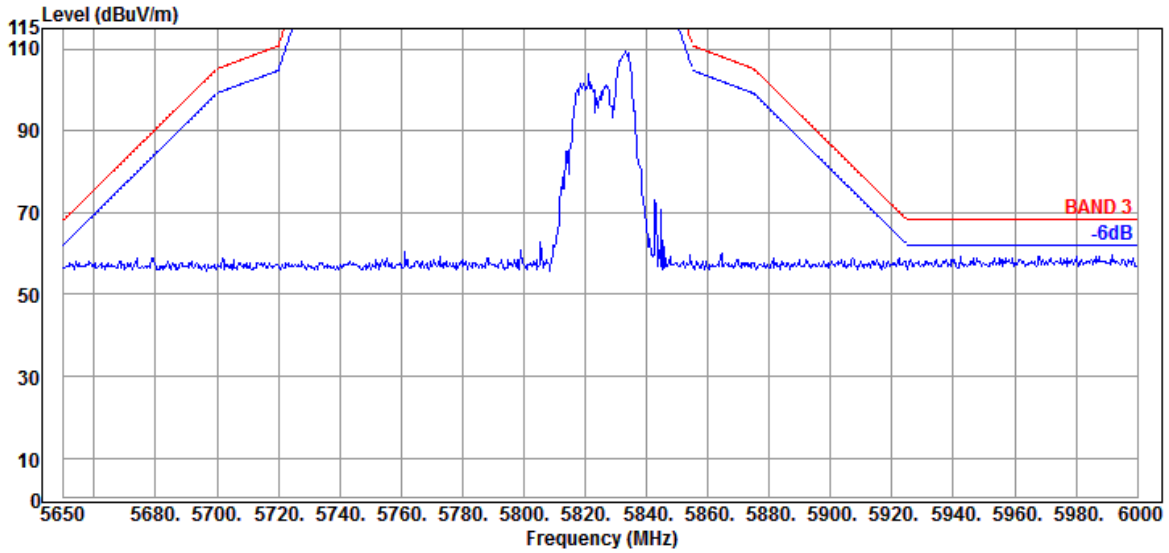


Antenna at Vertical Polarization

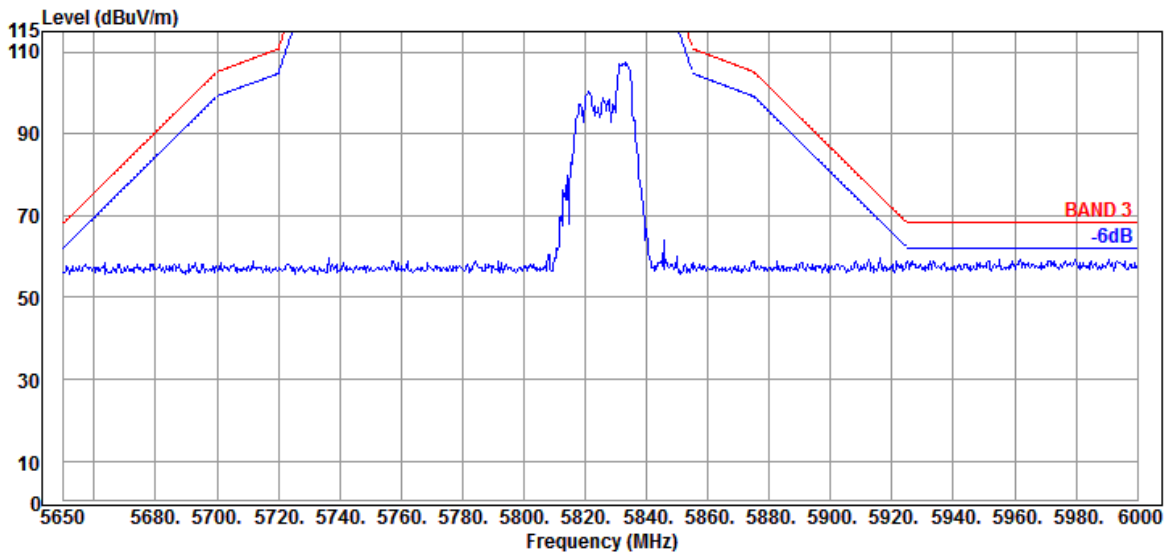


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 106/54 | Frequency | TX 5825MHz |


Antenna at Horizontal Polarization

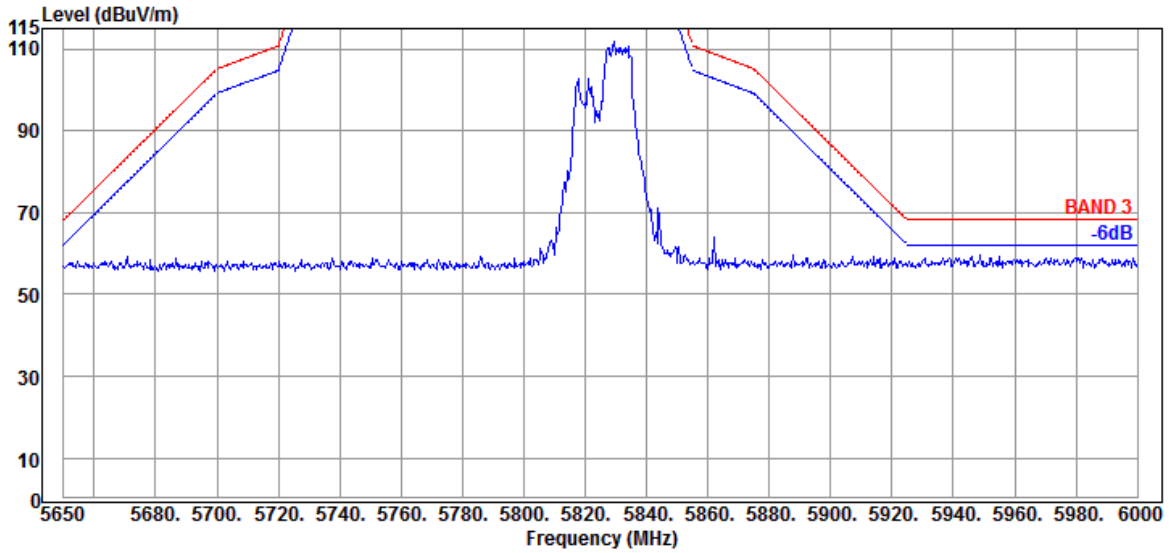

Antenna at Vertical Polarization

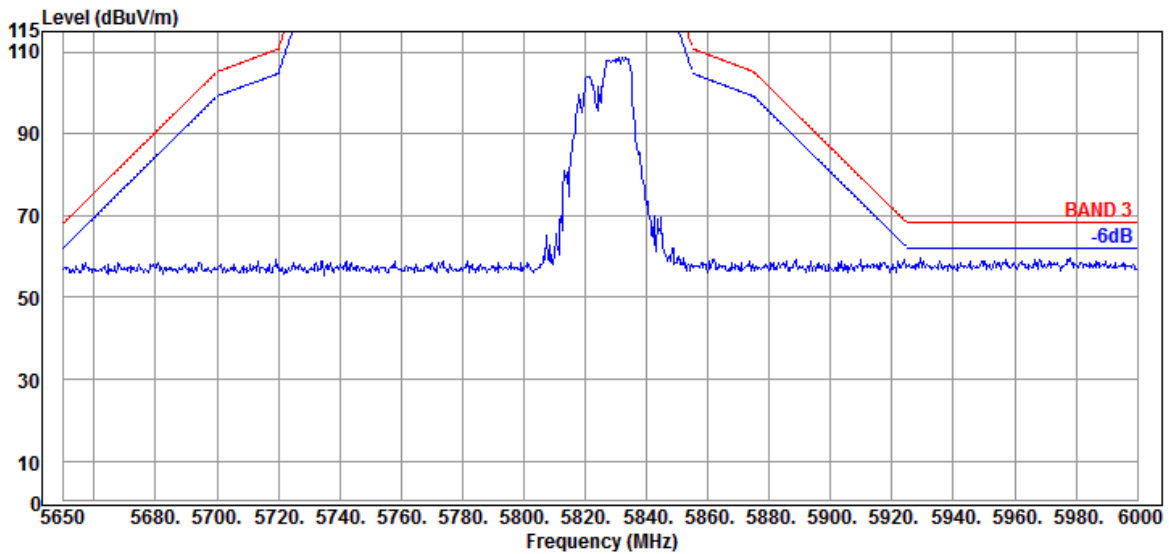


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| RU Configuration | 242/61 | Frequency | TX 5190MHz |

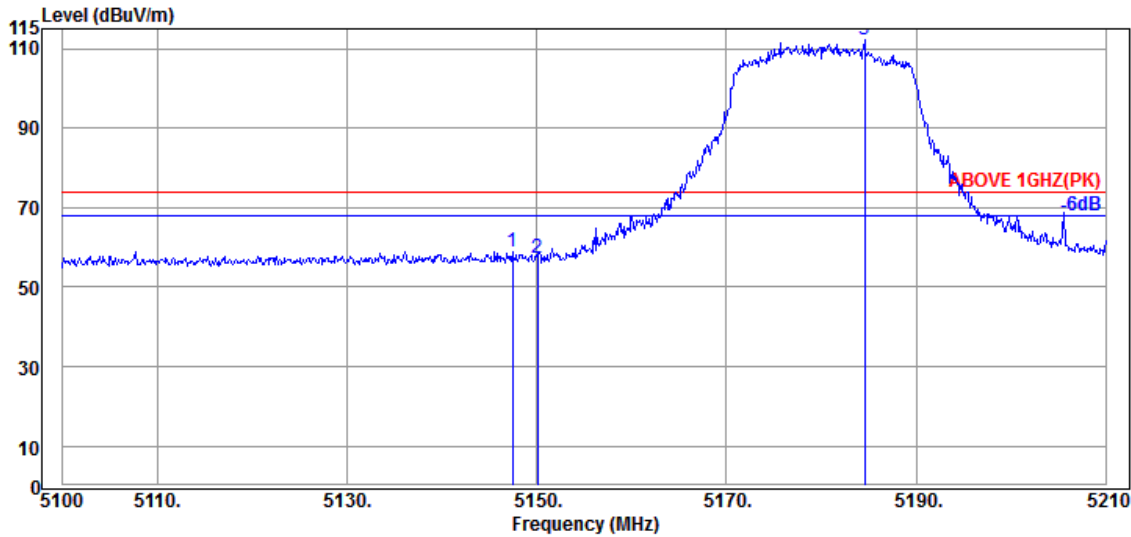

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.410 | 34.50 | 8.88 | 34.34 | 49.74 | 58.78 | 74.00 | 15.22 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 48.41 | 57.45 | 74.00 | 16.55 | Peak |
| @ 5184.590 | 34.63 | 8.90 | 34.32 | 102.87 | 112.08 | --- | --- | Peak |

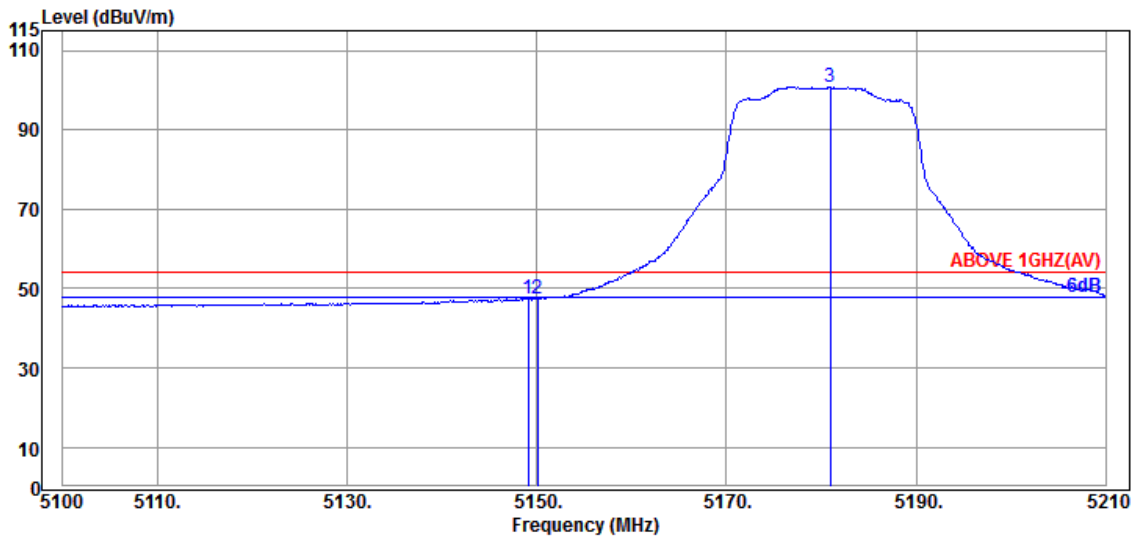


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.060 | 34.50 | 8.88 | 34.34 | 38.52 | 47.56 | 54.00 | 6.44 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 38.37 | 47.41 | 54.00 | 6.59 | Average |
| @ 5180.960 | 34.63 | 8.90 | 34.32 | 91.60 | 100.81 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| RU Configuration | 242/61 | Frequency | TX 5190MHz |

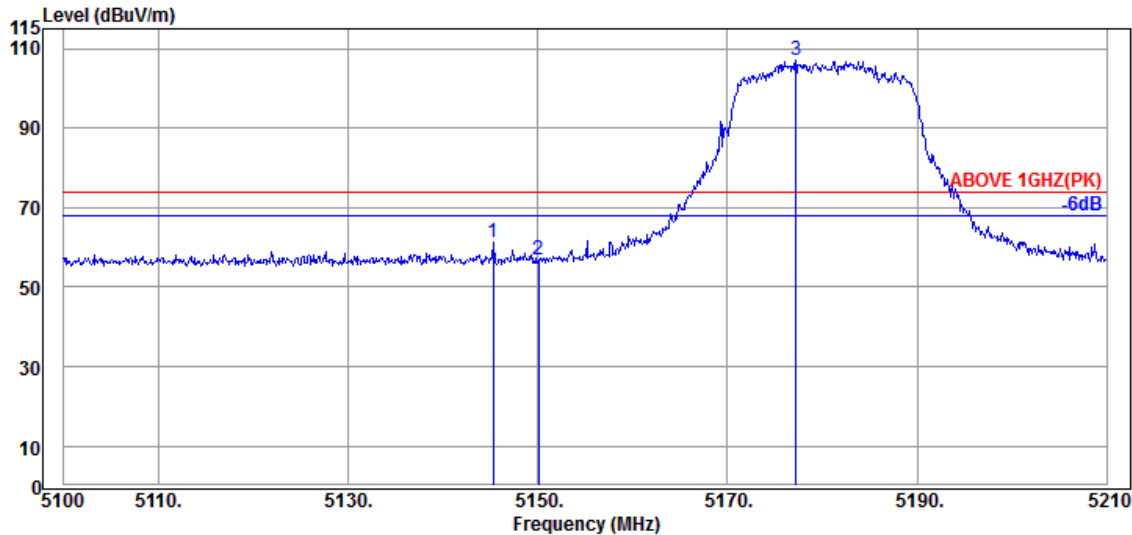

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.320 | 34.50 | 8.88 | 34.34 | 52.14 | 61.18 | 74.00 | 12.82 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 47.84 | 56.88 | 74.00 | 17.12 | Peak |
| @ 5177.220 | 34.63 | 8.90 | 34.32 | 97.84 | 107.05 | --- | --- | Peak |

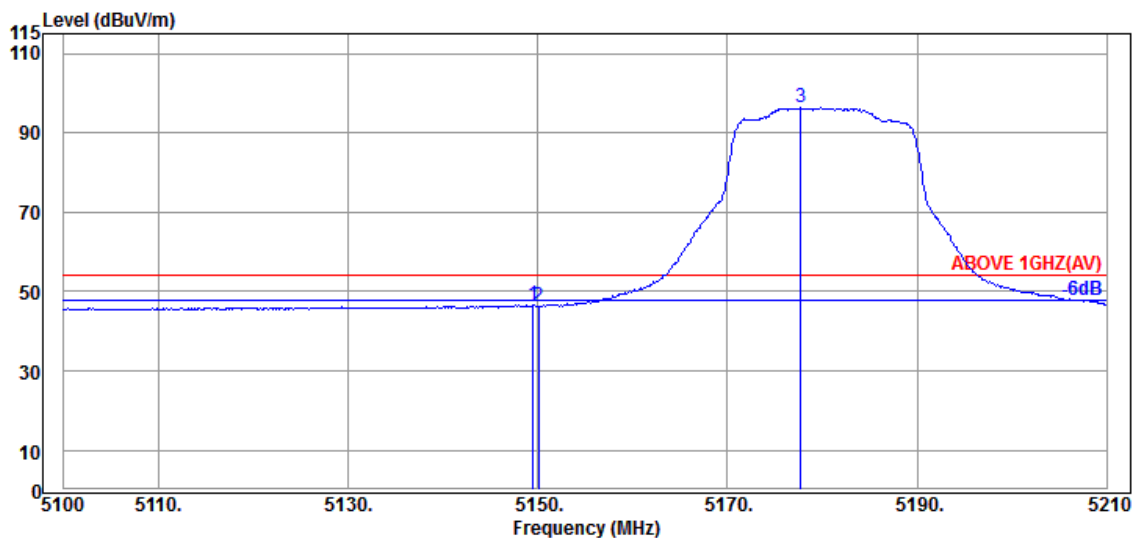


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.500 | 34.50 | 8.88 | 34.34 | 37.51 | 46.55 | 54.00 | 7.45 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 37.24 | 46.28 | 54.00 | 7.72 | Average |
| @ 5177.770 | 34.63 | 8.90 | 34.32 | 87.20 | 96.41 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| RU Configuration | 242/62 | Frequency | TX 5310MHz |

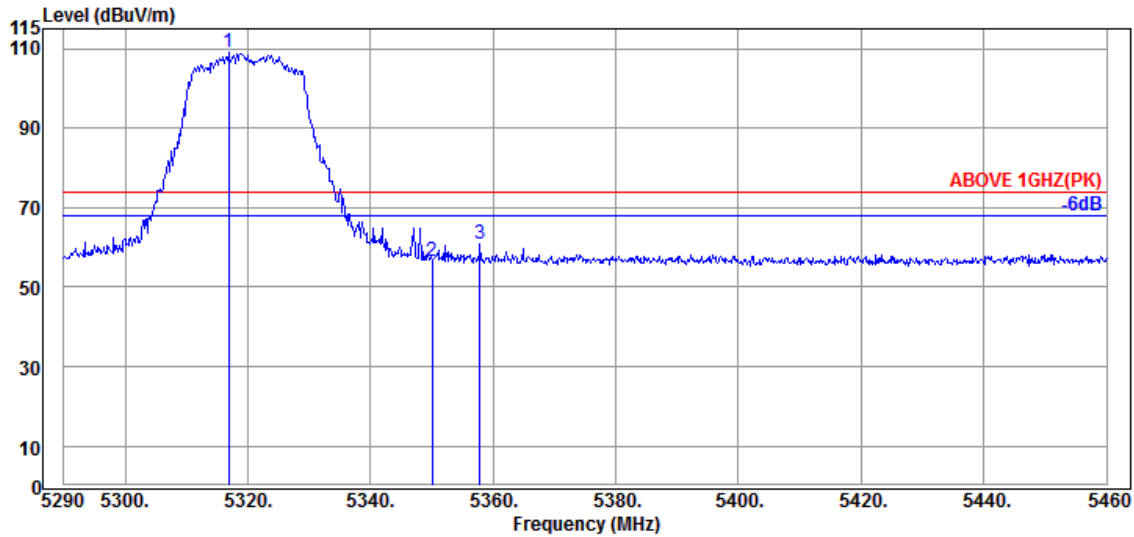

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.860 | 34.57 | 8.98 | 34.27 | 99.86 | 109.14 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 46.91 | 56.54 | 74.00 | 17.46 | Peak |
| 5357.830 | 34.87 | 9.00 | 34.26 | 51.07 | 60.68 | 74.00 | 13.32 | Peak |

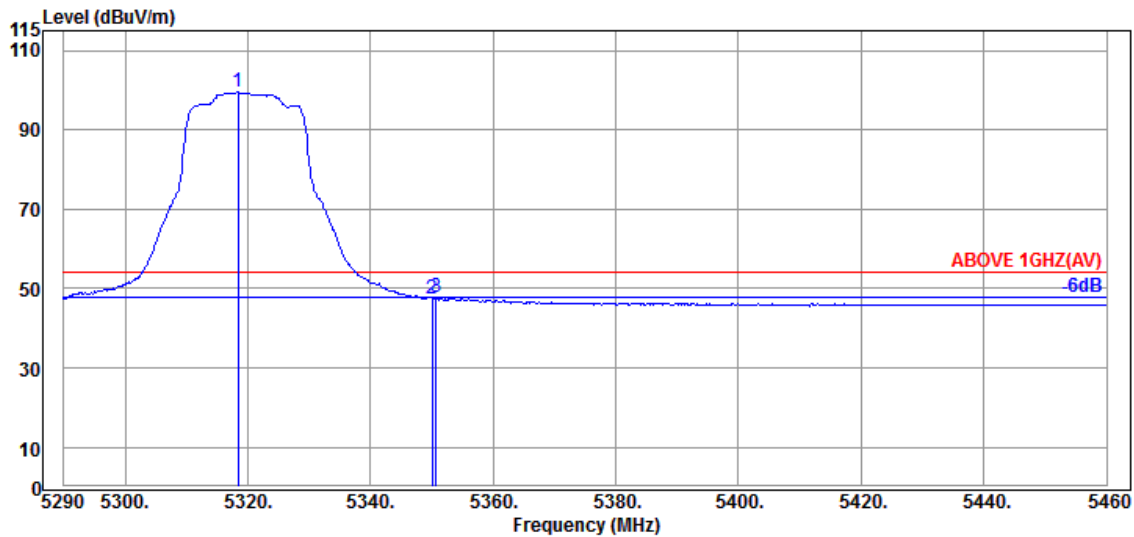


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.390 | 34.57 | 8.98 | 34.27 | 90.23 | 99.51 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 37.69 | 47.32 | 54.00 | 6.68 | Average |
| 5350.690 | 34.90 | 8.99 | 34.26 | 38.03 | 47.66 | 54.00 | 6.34 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| RU Configuration | 242/62 | Frequency | TX 5310MHz |

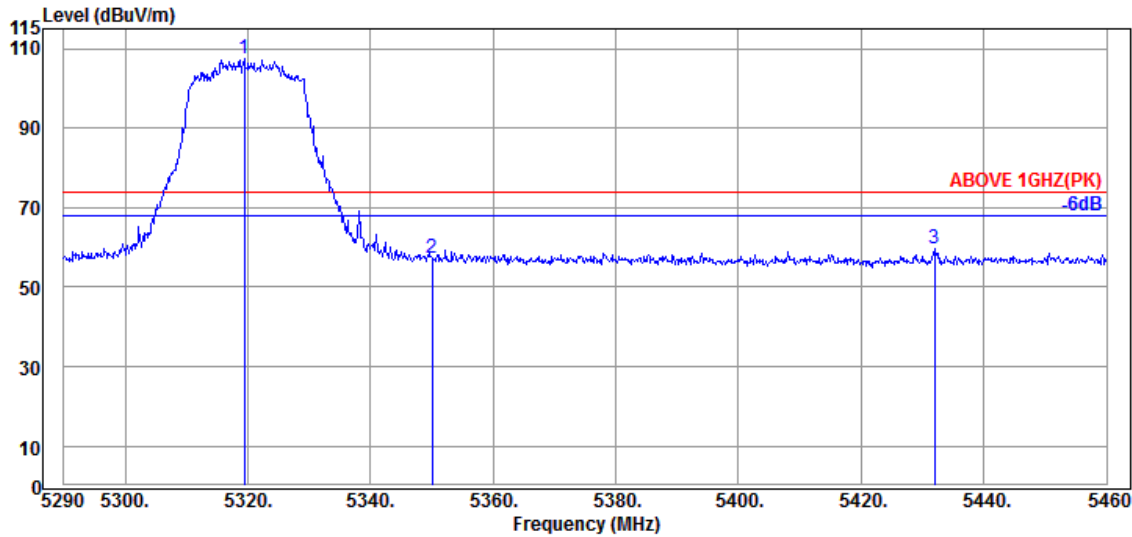

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5319.410 | 34.57 | 8.98 | 34.27 | 98.35 | 107.63 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 47.87 | 57.50 | 74.00 | 16.50 | Peak |
| 5431.950 | 34.70 | 9.04 | 34.23 | 50.18 | 59.69 | 74.00 | 14.31 | Peak |

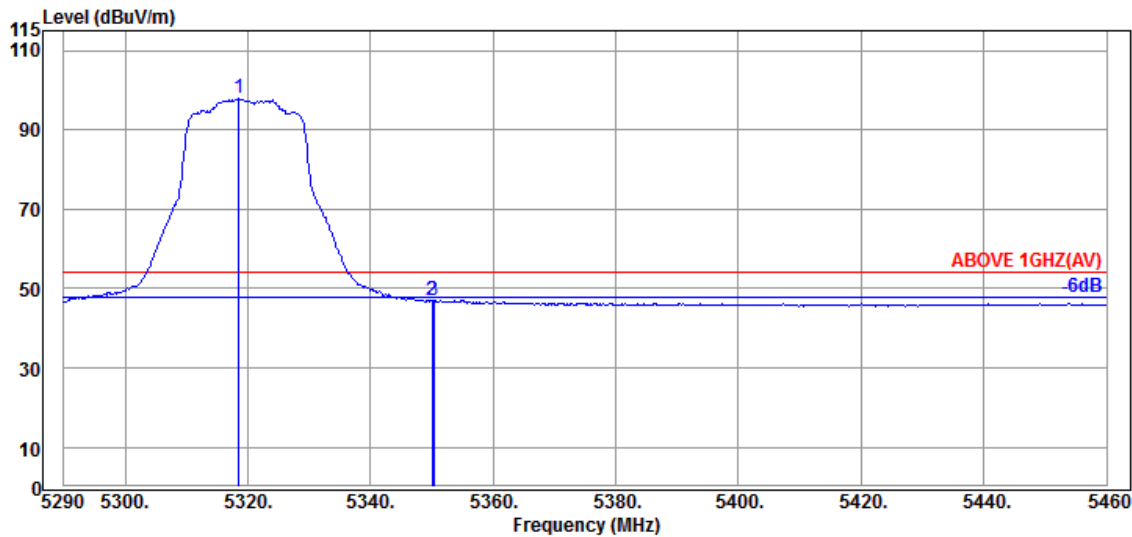


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.560 | 34.57 | 8.98 | 34.27 | 88.58 | 97.86 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 37.25 | 46.88 | 54.00 | 7.12 | Average |
| 5350.350 | 34.90 | 8.99 | 34.26 | 37.48 | 47.11 | 54.00 | 6.89 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/61 | Frequency | TX 5510MHz |

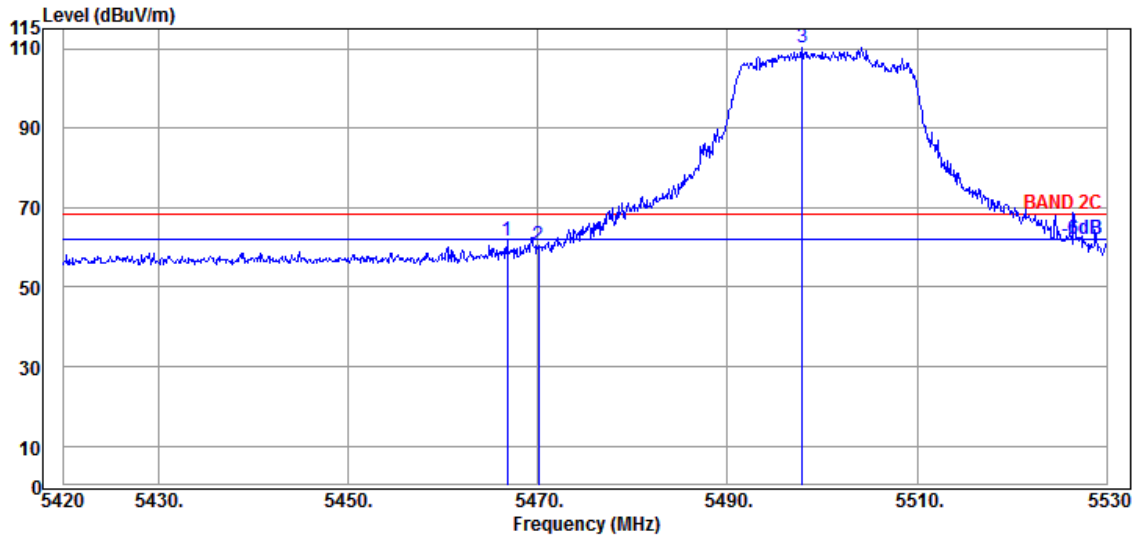

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.750 | 34.63 | 9.06 | 34.21 | 52.33 | 61.81 | 68.20 | 6.39 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 50.82 | 60.30 | 68.20 | 7.90 | Peak |
| @ 5497.880 | 34.70 | 9.08 | 34.20 | 100.77 | 110.35 | --- | --- | Peak |

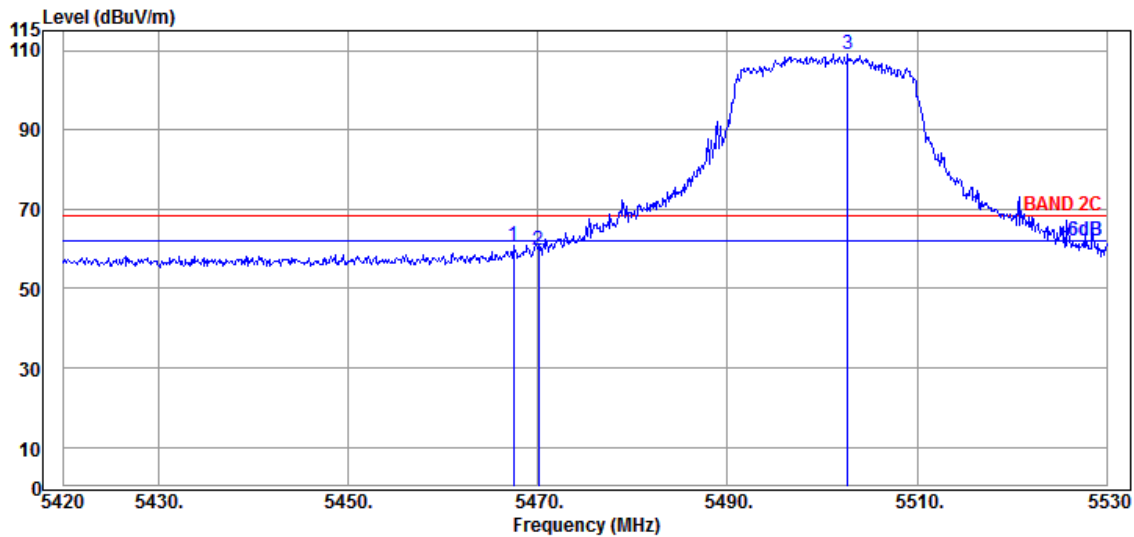


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.410 | 34.63 | 9.06 | 34.21 | 51.24 | 60.72 | 68.20 | 7.48 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 50.34 | 59.82 | 68.20 | 8.38 | Peak |
| @ 5502.720 | 34.70 | 9.08 | 34.20 | 99.52 | 109.10 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/61 | Frequency | TX 5510MHz |

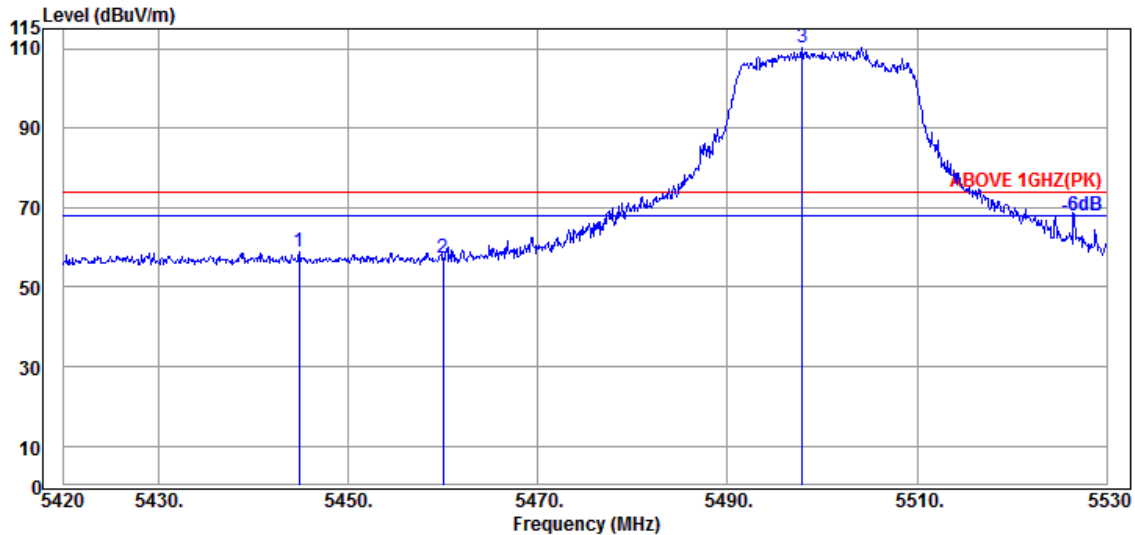

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5444.860 | 34.65 | 9.04 | 34.22 | 49.60 | 59.07 | 74.00 | 14.93 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 47.81 | 57.25 | 74.00 | 16.75 | Peak |
| @ 5497.880 | 34.70 | 9.08 | 34.20 | 100.76 | 110.34 | --- | --- | Peak |

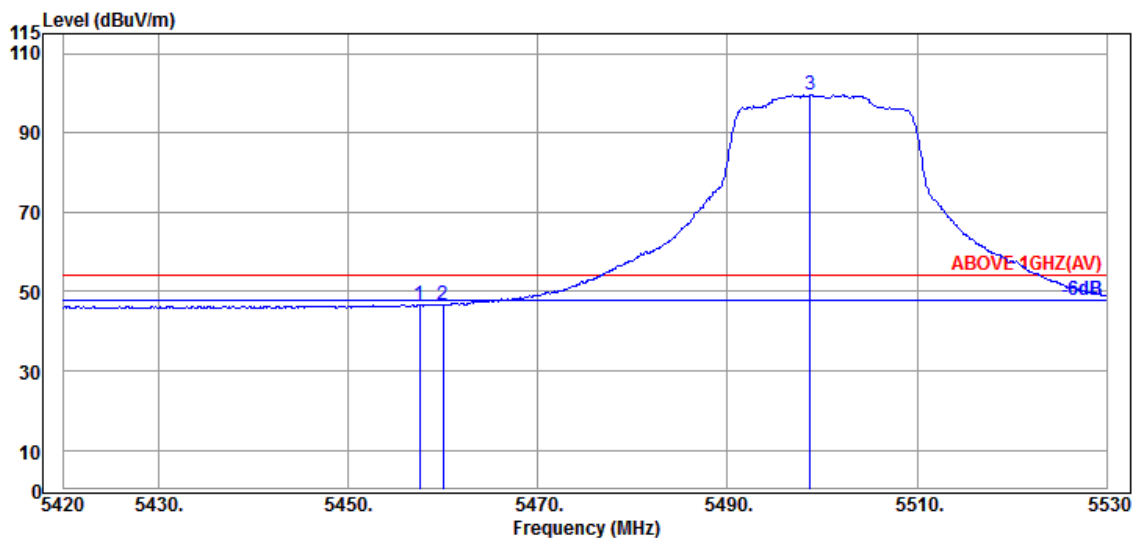


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.510 | 34.60 | 9.05 | 34.21 | 37.38 | 46.82 | 54.00 | 7.18 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 37.23 | 46.67 | 54.00 | 7.33 | Average |
| @ 5498.760 | 34.70 | 9.08 | 34.20 | 90.08 | 99.66 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/61 | Frequency | TX 5510MHz |

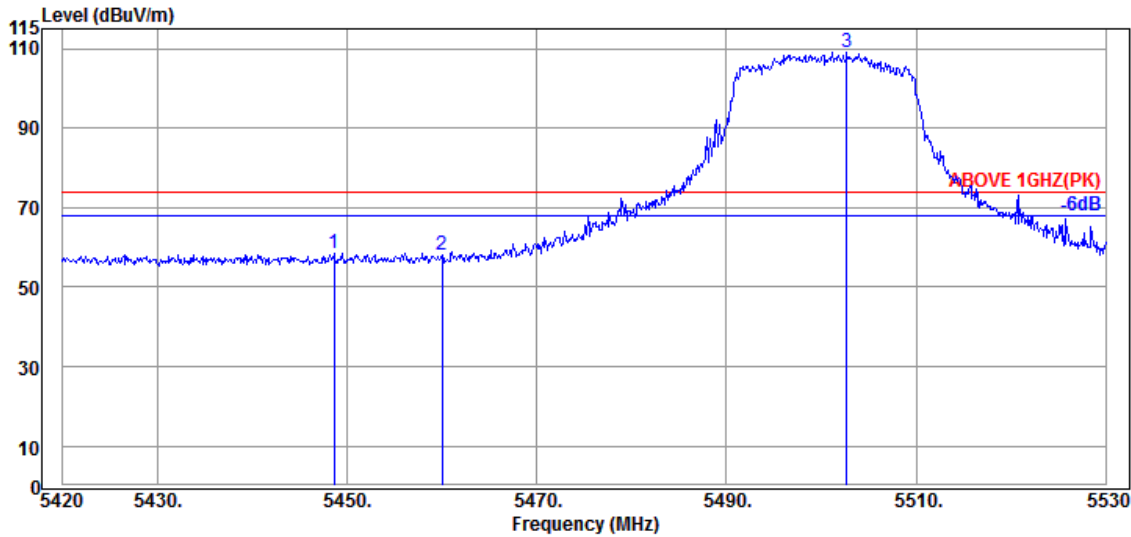

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5448.600 | 34.60 | 9.05 | 34.22 | 49.20 | 58.63 | 74.00 | 15.37 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 48.53 | 57.97 | 74.00 | 16.03 | Peak |
| @ 5502.720 | 34.70 | 9.08 | 34.20 | 99.52 | 109.10 | --- | --- | Peak |

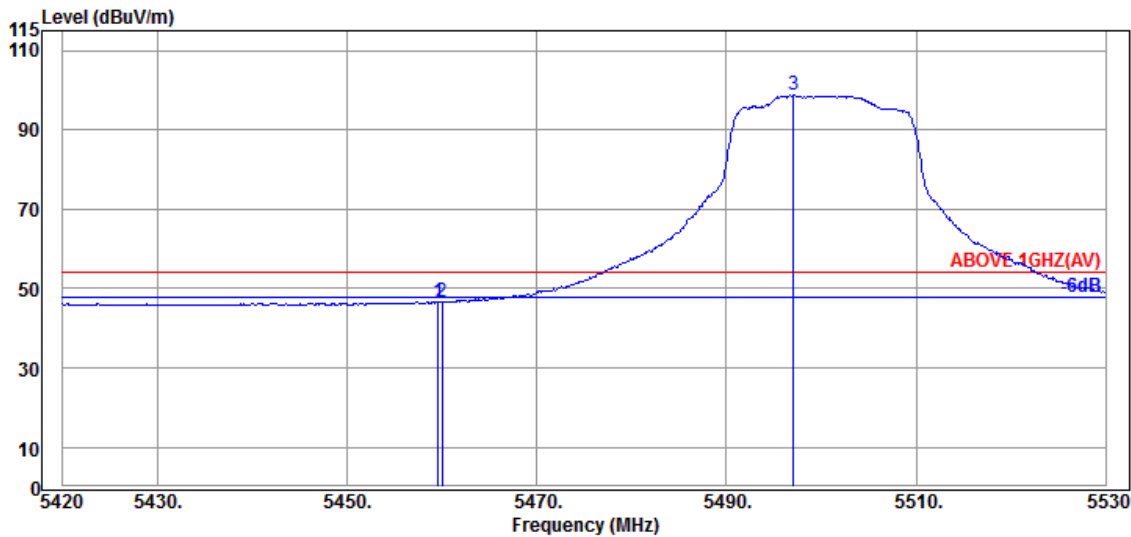


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.600 | 34.60 | 9.05 | 34.21 | 37.21 | 46.65 | 54.00 | 7.35 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 37.21 | 46.65 | 54.00 | 7.35 | Average |
| @ 5497.110 | 34.70 | 9.08 | 34.20 | 89.18 | 98.76 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/62 | Frequency | TX 5670MHz |

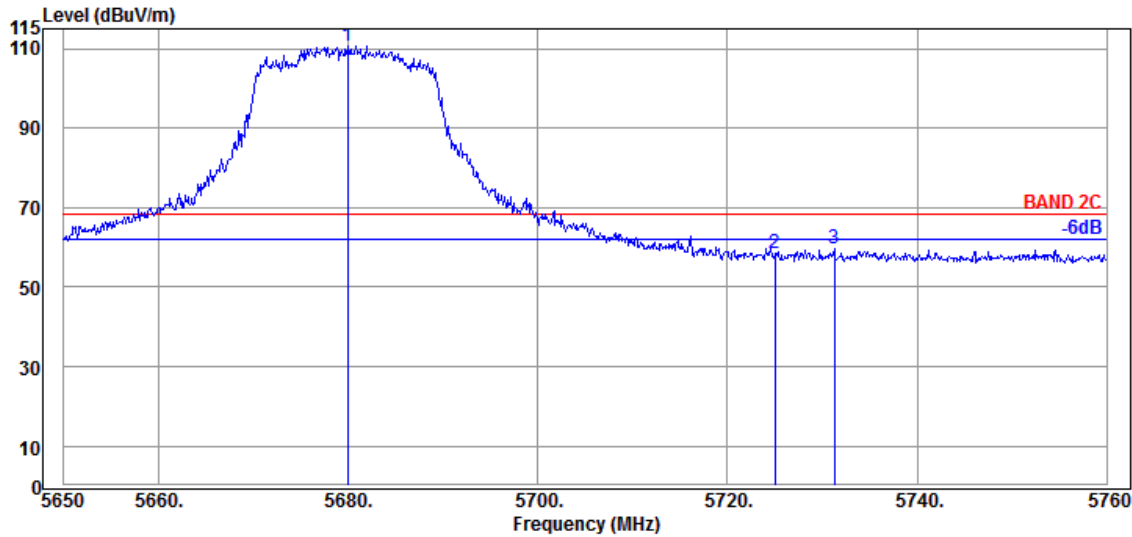

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5679.920 | 34.63 | 9.17 | 34.29 | 101.25 | 110.76 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 48.51 | 58.31 | 68.20 | 9.89 | Peak |
| 5731.290 | 34.90 | 9.20 | 34.31 | 50.01 | 59.80 | 68.20 | 8.40 | Peak |

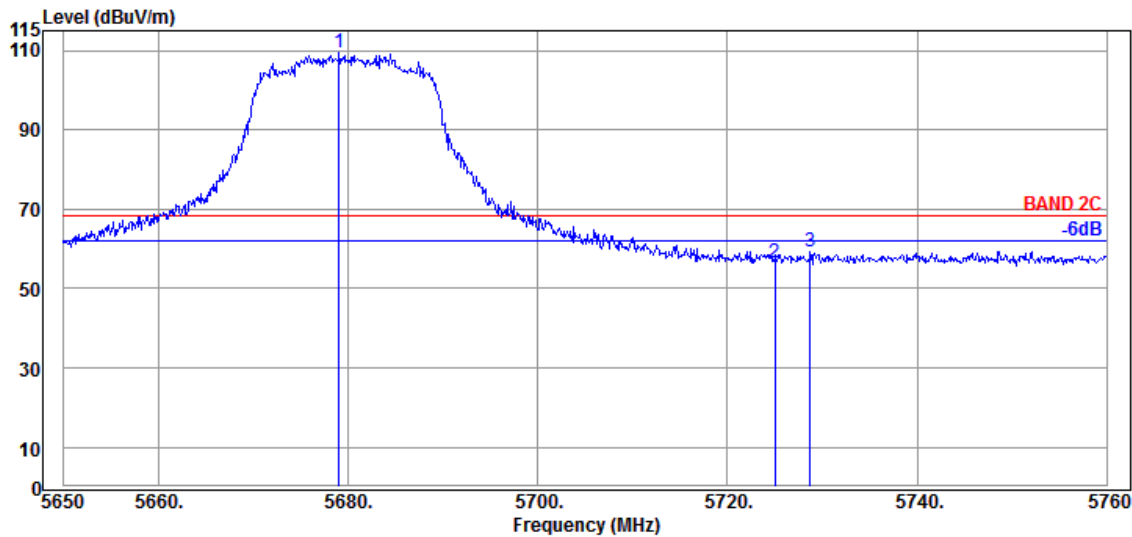


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5679.040 | 34.63 | 9.17 | 34.29 | 100.12 | 109.63 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 46.74 | 56.54 | 68.20 | 11.66 | Peak |
| 5728.760 | 34.90 | 9.20 | 34.31 | 49.47 | 59.26 | 68.20 | 8.94 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| RU Configuration | 242/61 | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

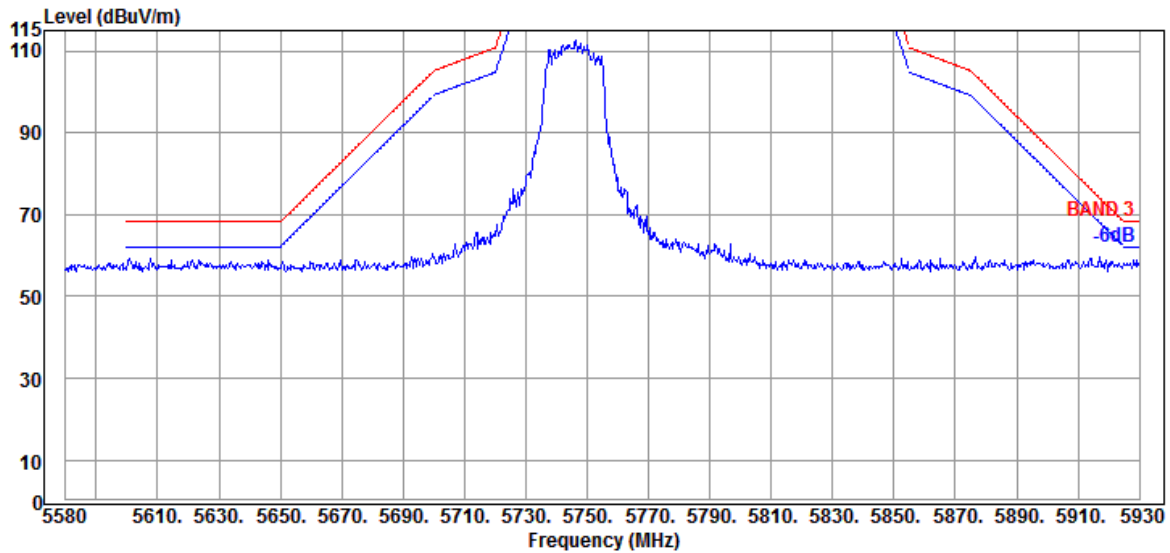


Antenna at Vertical Polarization

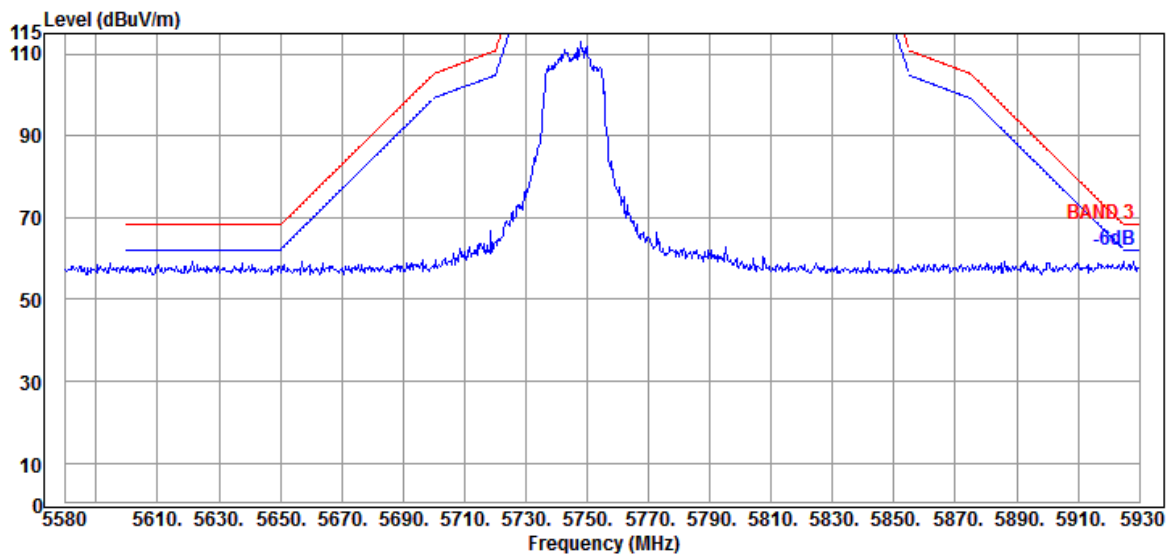


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| RU Configuration | 242/62 | Frequency | TX 5795MHz |


Antenna at Horizontal Polarization

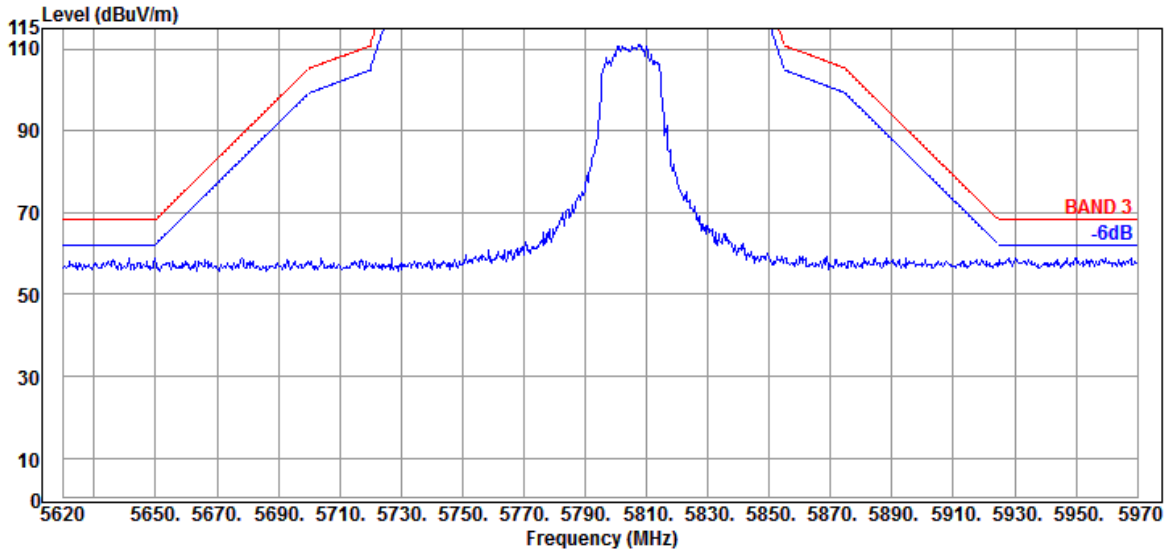

Antenna at Vertical Polarization

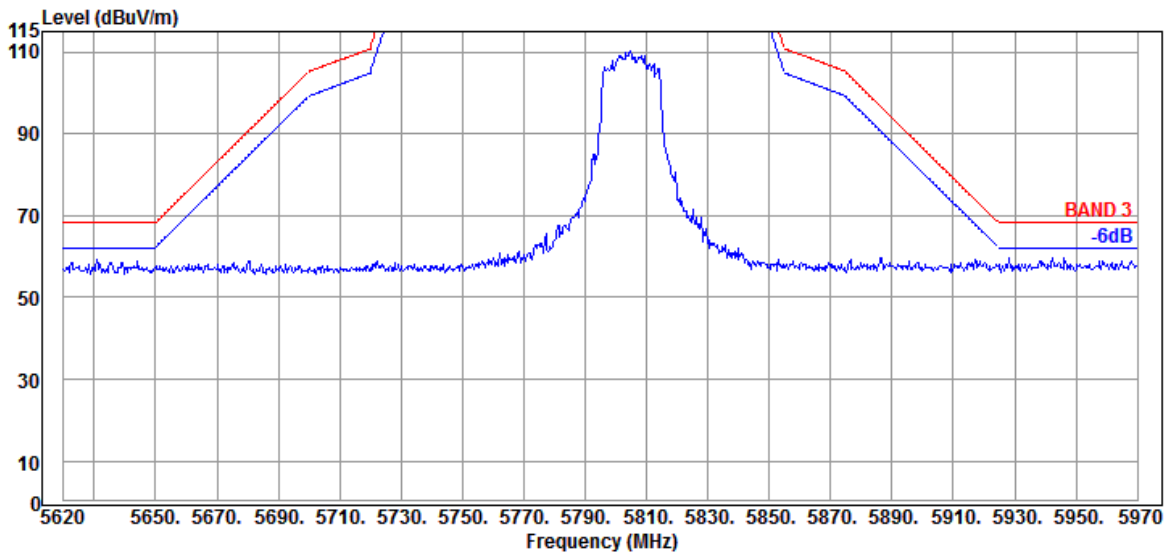


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| RU Configuration | 484/65 | Frequency | TX 5210MHz |

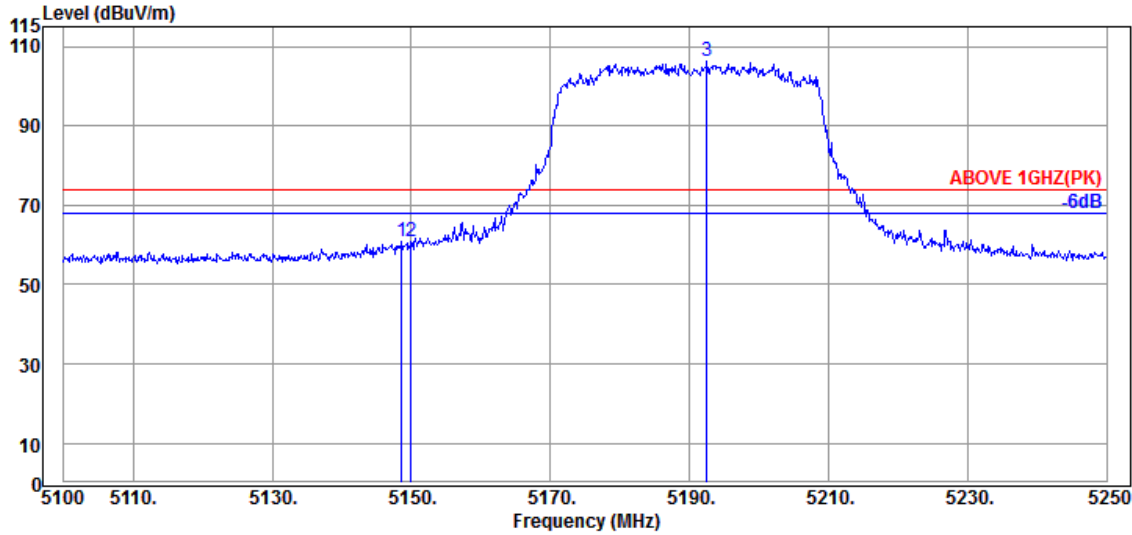

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.600 | 34.50 | 8.88 | 34.34 | 51.79 | 60.83 | 74.00 | 13.17 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 51.92 | 60.96 | 74.00 | 13.04 | Peak |
| @ 5192.550 | 34.70 | 8.91 | 34.32 | 96.88 | 106.17 | --- | --- | Peak |

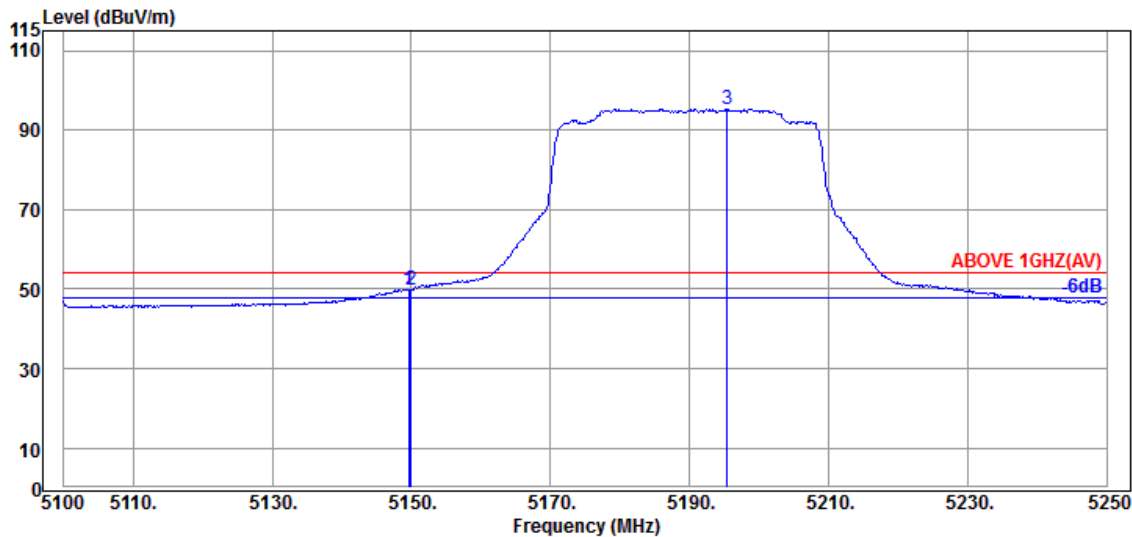


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.650 | 34.50 | 8.88 | 34.34 | 40.81 | 49.85 | 54.00 | 4.15 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 40.84 | 49.88 | 54.00 | 4.12 | Average |
| @ 5195.400 | 34.70 | 8.91 | 34.32 | 86.07 | 95.36 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| RU Configuration | 484/65 | Frequency | TX 5210MHz |

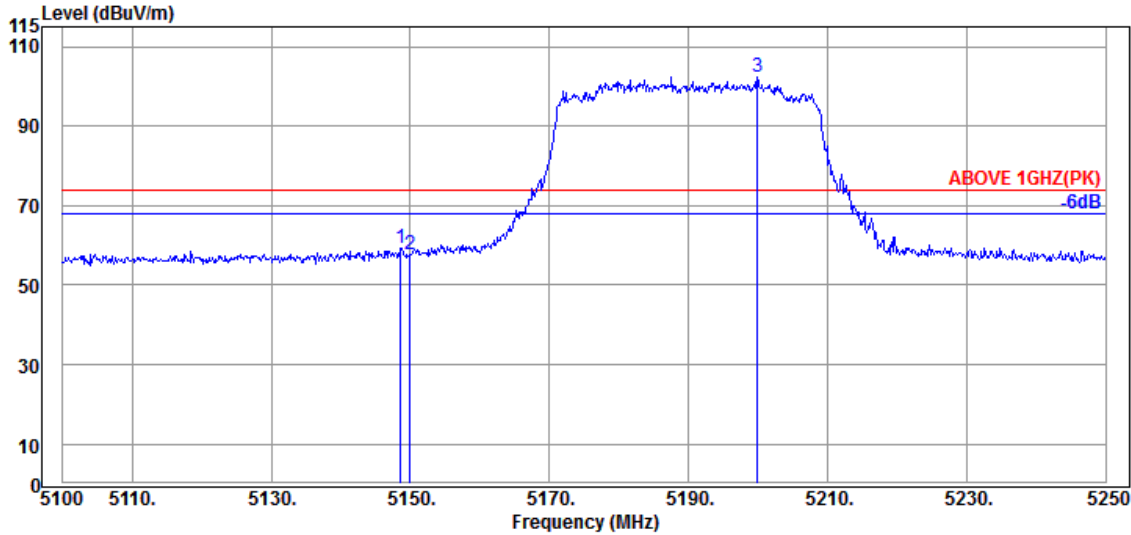

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.600 | 34.50 | 8.88 | 34.34 | 50.26 | 59.30 | 74.00 | 14.70 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 48.64 | 57.68 | 74.00 | 16.32 | Peak |
| @ 5199.900 | 34.70 | 8.91 | 34.32 | 92.93 | 102.22 | --- | --- | Peak |

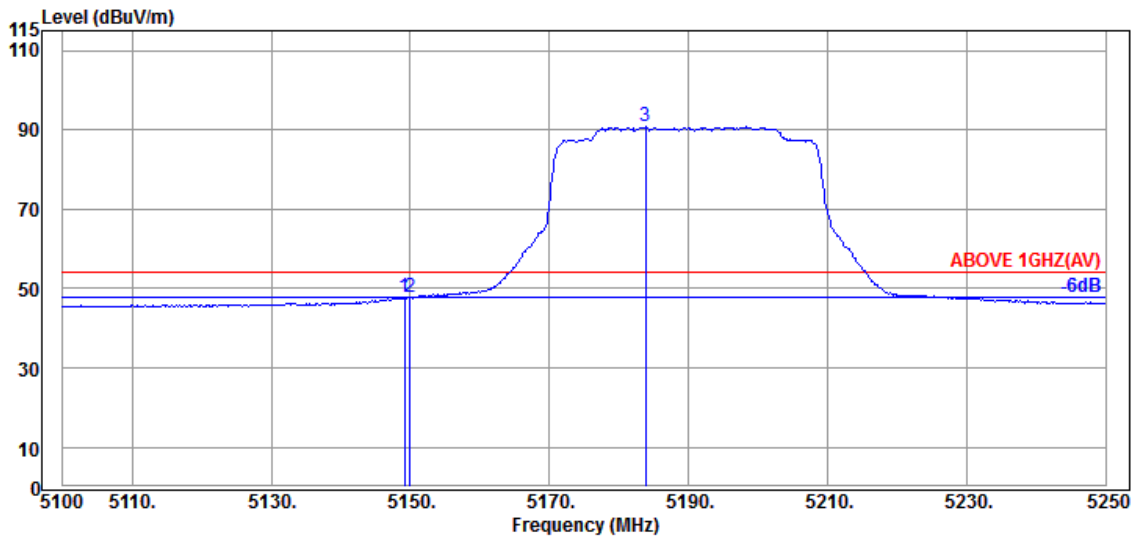


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.200 | 34.50 | 8.88 | 34.34 | 38.73 | 47.77 | 54.00 | 6.23 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 38.64 | 47.68 | 54.00 | 6.32 | Average |
| @ 5183.850 | 34.63 | 8.90 | 34.32 | 81.51 | 90.72 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| RU Configuration | 484/66 | Frequency | TX 5290MHz |

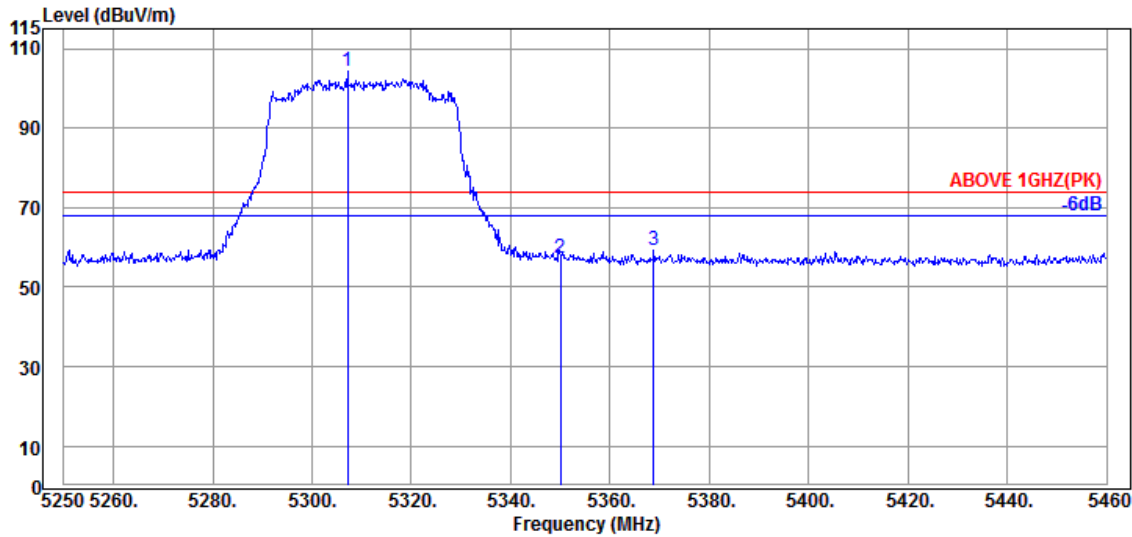

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5307.120 | 34.40 | 8.97 | 34.28 | 95.05 | 104.14 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 47.73 | 57.36 | 74.00 | 16.64 | Peak |
| 5368.860 | 34.87 | 9.00 | 34.25 | 49.48 | 59.10 | 74.00 | 14.90 | Peak |

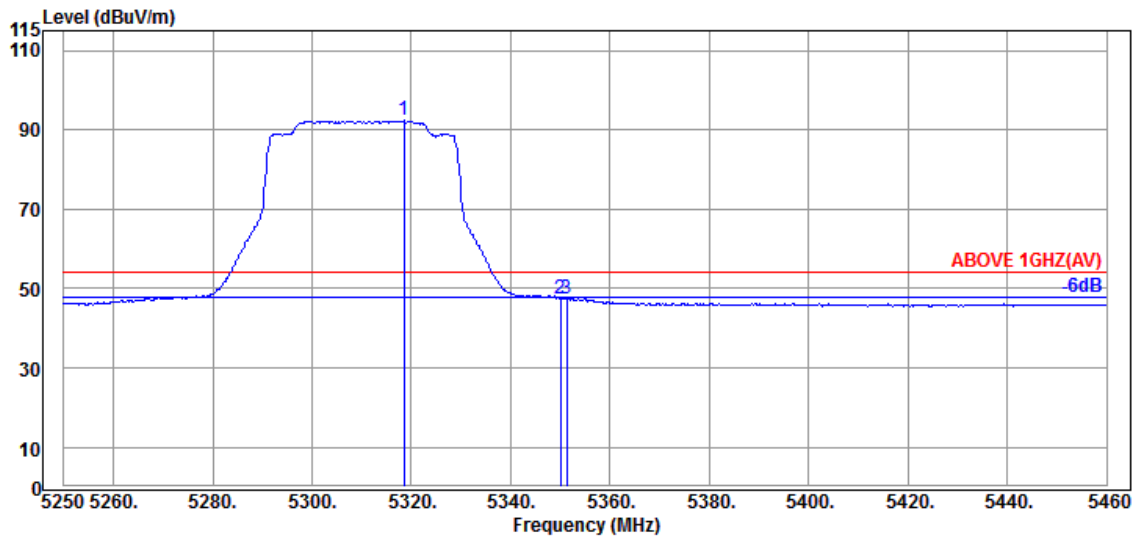


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.460 | 34.57 | 8.98 | 34.27 | 83.01 | 92.29 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 37.76 | 47.39 | 54.00 | 6.61 | Average |
| 5351.220 | 34.90 | 8.99 | 34.26 | 37.93 | 47.56 | 54.00 | 6.44 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| RU Configuration | 484/66 | Frequency | TX 5290MHz |

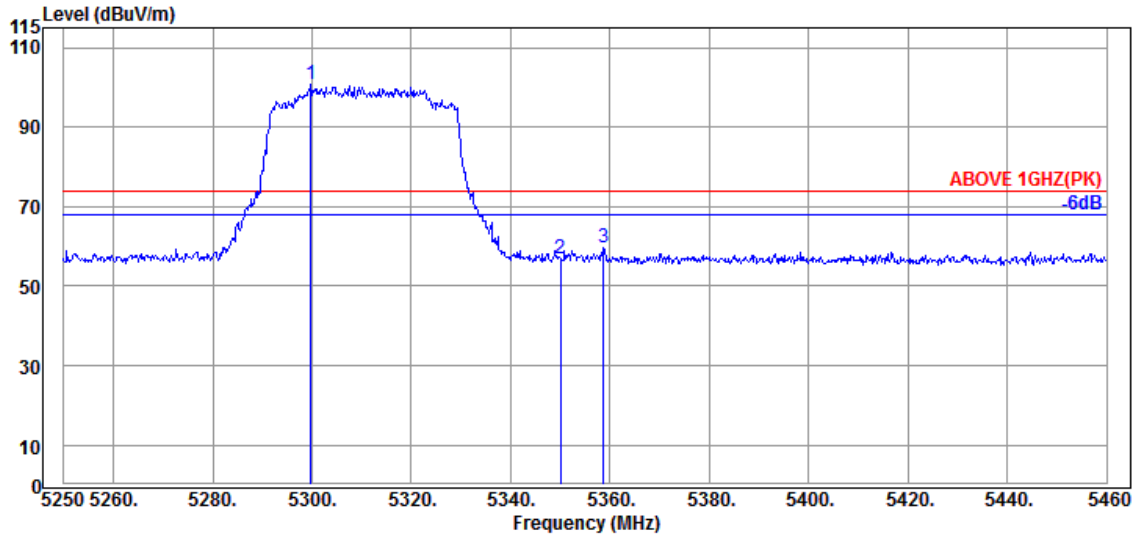

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5299.770 | 34.40 | 8.97 | 34.28 | 91.53 | 100.62 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 47.12 | 56.75 | 74.00 | 17.25 | Peak |
| 5358.780 | 34.87 | 9.00 | 34.26 | 49.91 | 59.52 | 74.00 | 14.48 | Peak |

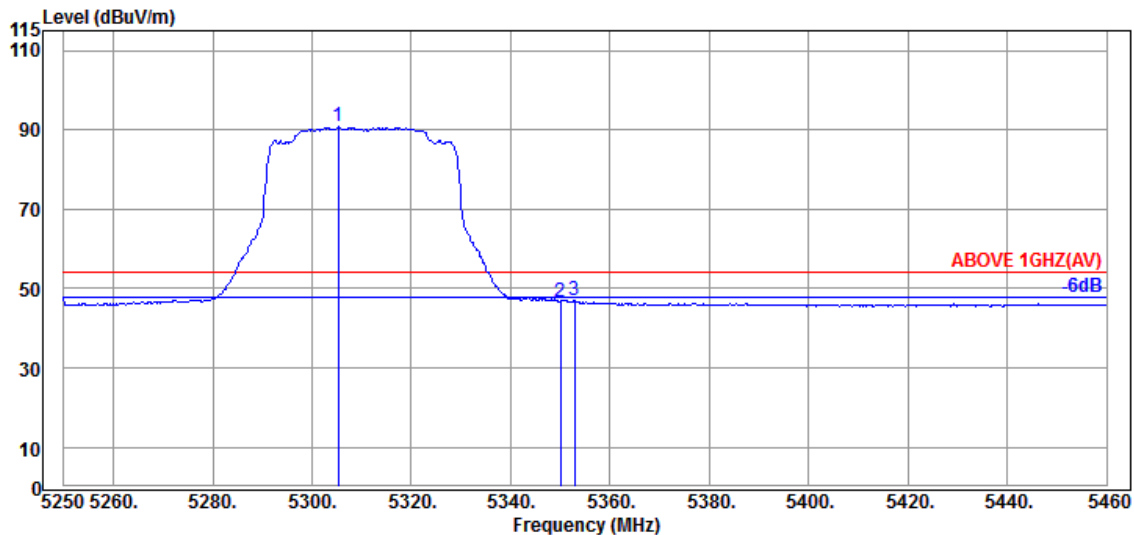


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5305.230 | 34.40 | 8.97 | 34.28 | 81.71 | 90.80 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 37.17 | 46.80 | 54.00 | 7.20 | Average |
| 5352.900 | 34.90 | 8.99 | 34.26 | 37.47 | 47.10 | 54.00 | 6.90 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

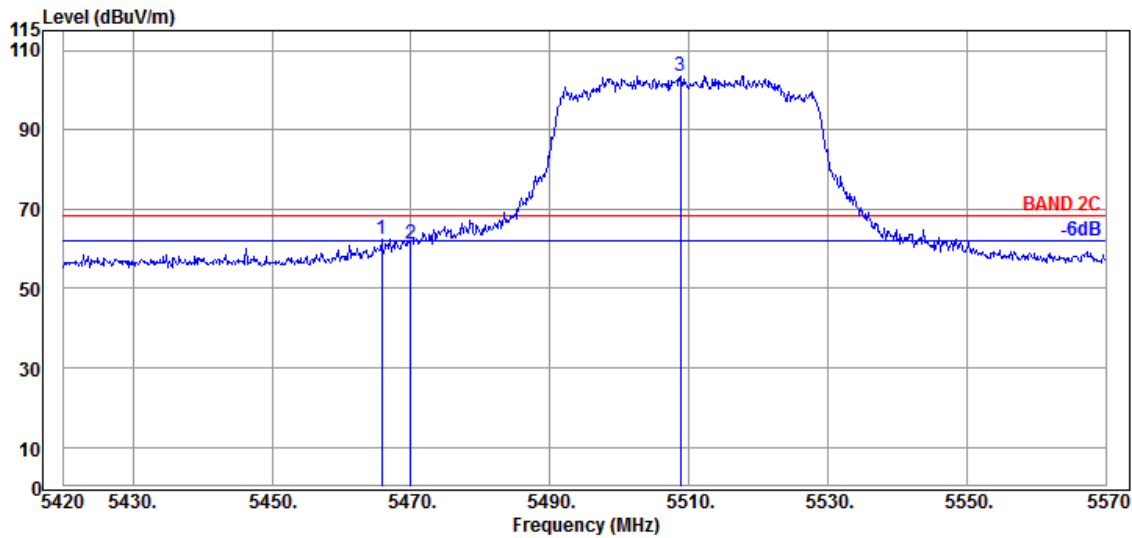

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.750 | 34.63 | 9.06 | 34.21 | 52.98 | 62.46 | 68.20 | 5.74 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 51.82 | 61.30 | 68.20 | 6.90 | Peak |
| @ 5508.800 | 34.70 | 9.08 | 34.21 | 93.99 | 103.56 | --- | --- | Peak |

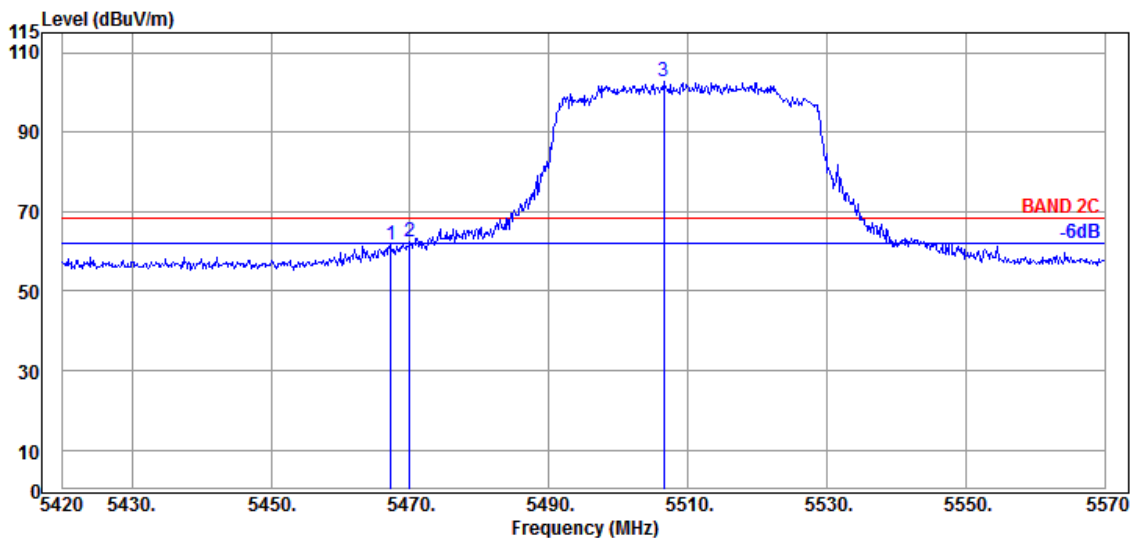


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.250 | 34.63 | 9.06 | 34.21 | 52.20 | 61.68 | 68.20 | 6.52 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 53.10 | 62.58 | 68.20 | 5.62 | Peak |
| @ 5506.550 | 34.70 | 9.08 | 34.21 | 93.27 | 102.84 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

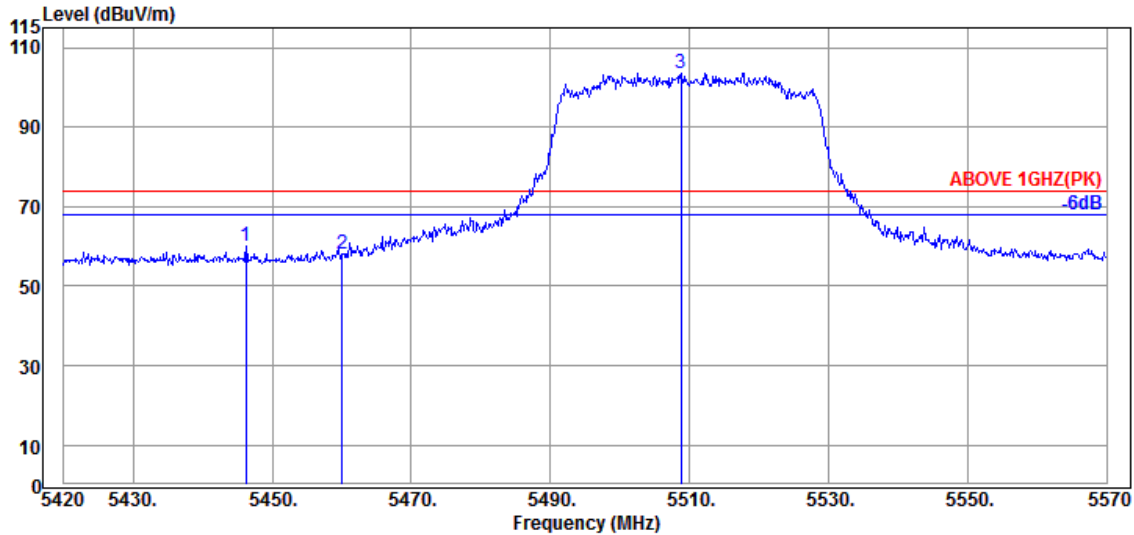

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5446.250 | 34.65 | 9.04 | 34.22 | 50.52 | 59.99 | 74.00 | 14.01 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 48.46 | 57.90 | 74.00 | 16.10 | Peak |
| @ 5508.800 | 34.70 | 9.08 | 34.21 | 93.99 | 103.56 | --- | --- | Peak |

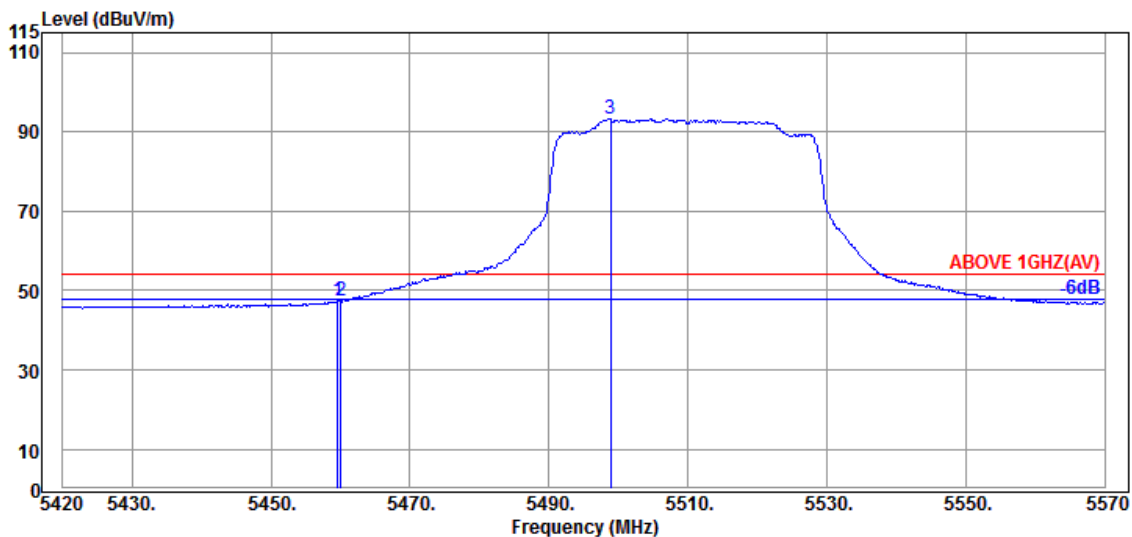


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.600 | 34.60 | 9.05 | 34.21 | 37.83 | 47.27 | 54.00 | 6.73 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 37.84 | 47.28 | 54.00 | 6.72 | Average |
| @ 5498.900 | 34.70 | 9.08 | 34.20 | 83.83 | 93.41 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

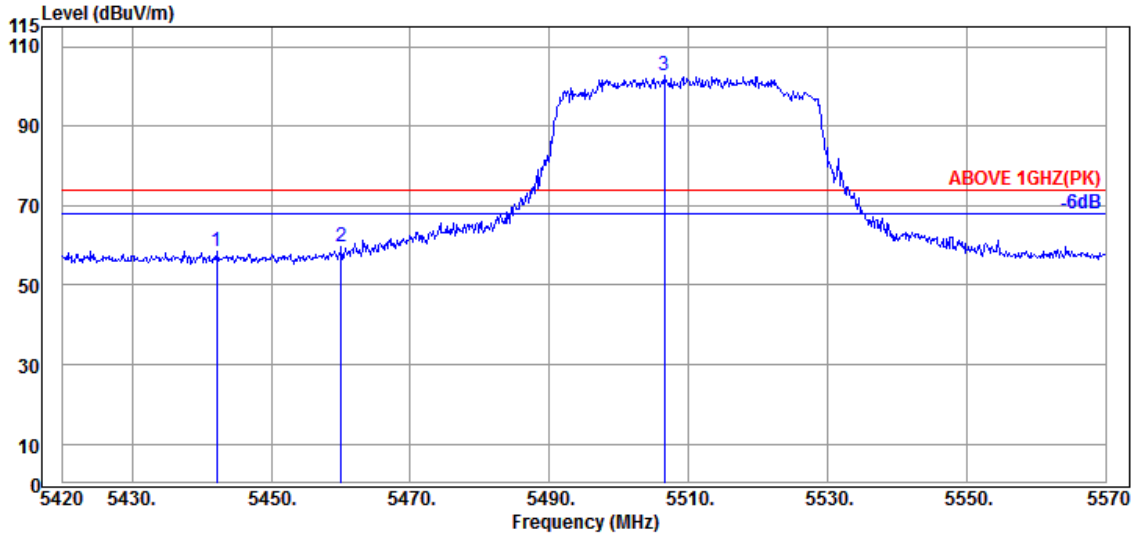

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5442.200 | 34.65 | 9.04 | 34.22 | 49.20 | 58.67 | 74.00 | 15.33 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 50.31 | 59.75 | 74.00 | 14.25 | Peak |
| @ 5506.550 | 34.70 | 9.08 | 34.21 | 93.27 | 102.84 | --- | --- | Peak |

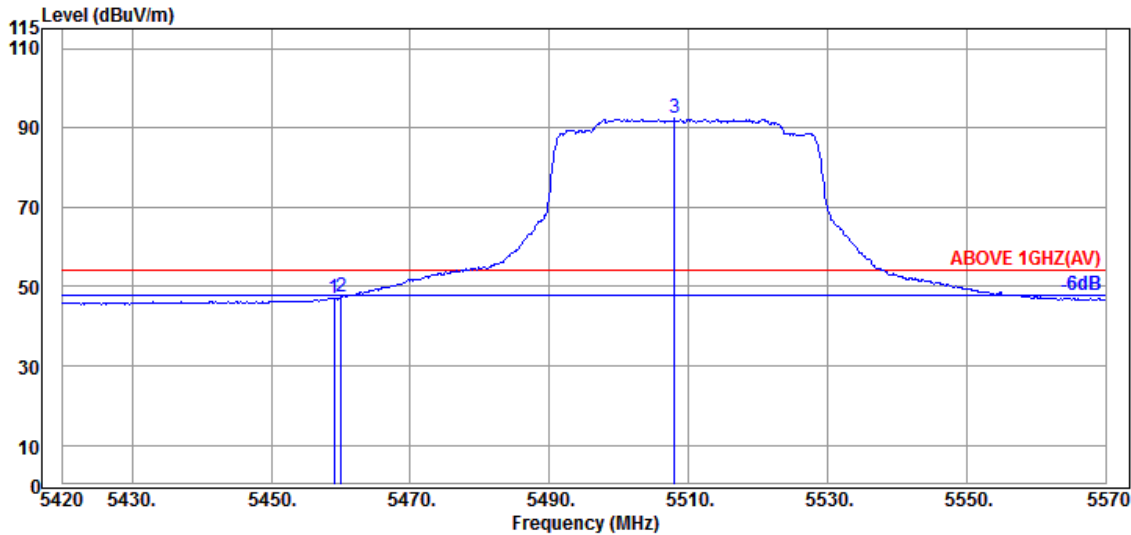


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.000 | 34.60 | 9.05 | 34.21 | 37.58 | 47.02 | 54.00 | 6.98 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 37.86 | 47.30 | 54.00 | 6.70 | Average |
| @ 5508.050 | 34.70 | 9.08 | 34.21 | 82.71 | 92.28 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/66 | Frequency | TX 5610MHz |

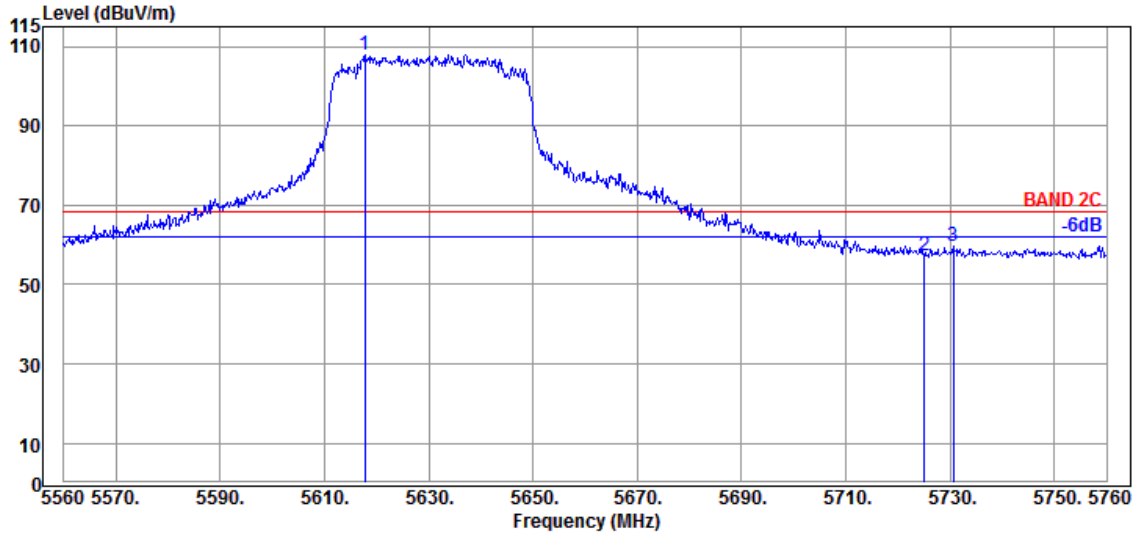

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5617.800 | 34.43 | 9.14 | 34.26 | 98.57 | 107.88 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 47.39 | 57.19 | 68.20 | 11.01 | Peak |
| 5730.600 | 34.90 | 9.20 | 34.31 | 49.95 | 59.74 | 68.20 | 8.46 | Peak |

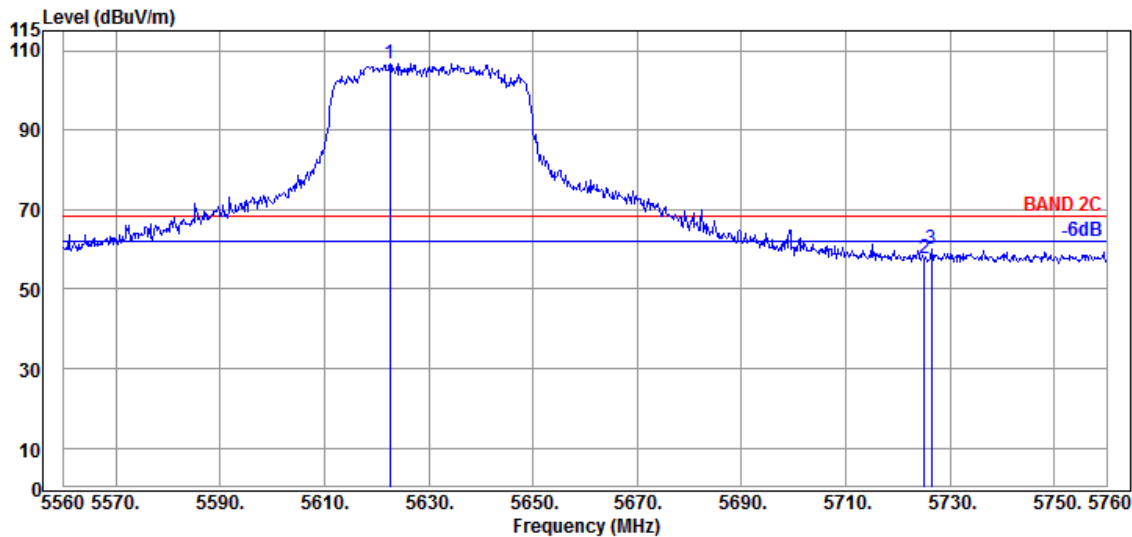


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5622.600 | 34.43 | 9.14 | 34.26 | 97.43 | 106.74 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 47.99 | 57.79 | 68.20 | 10.41 | Peak |
| 5726.400 | 34.90 | 9.20 | 34.31 | 50.19 | 59.98 | 68.20 | 8.22 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| RU Configuration | 484/65 | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

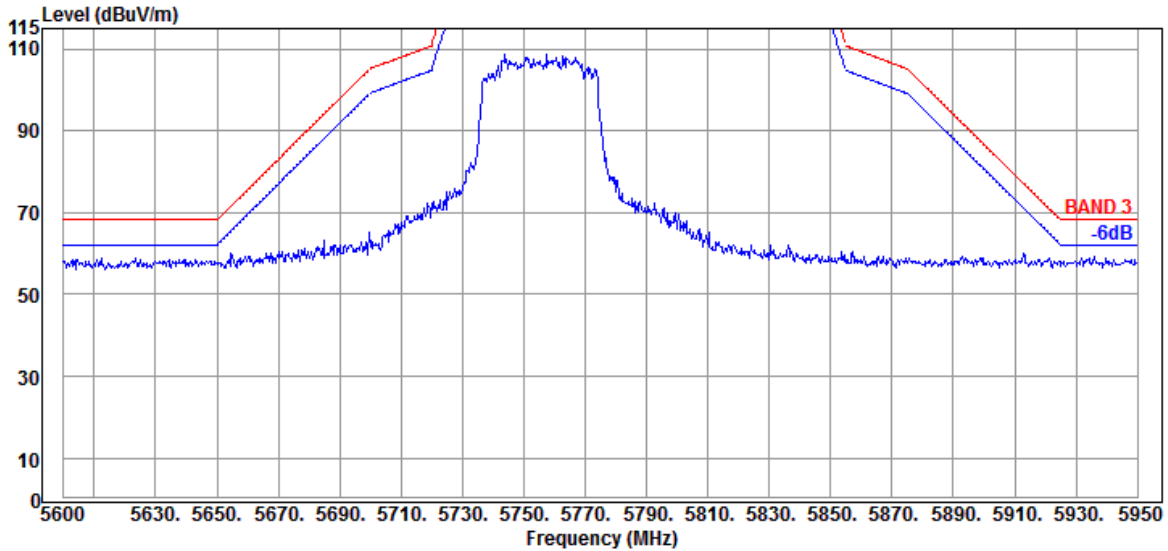


Antenna at Vertical Polarization

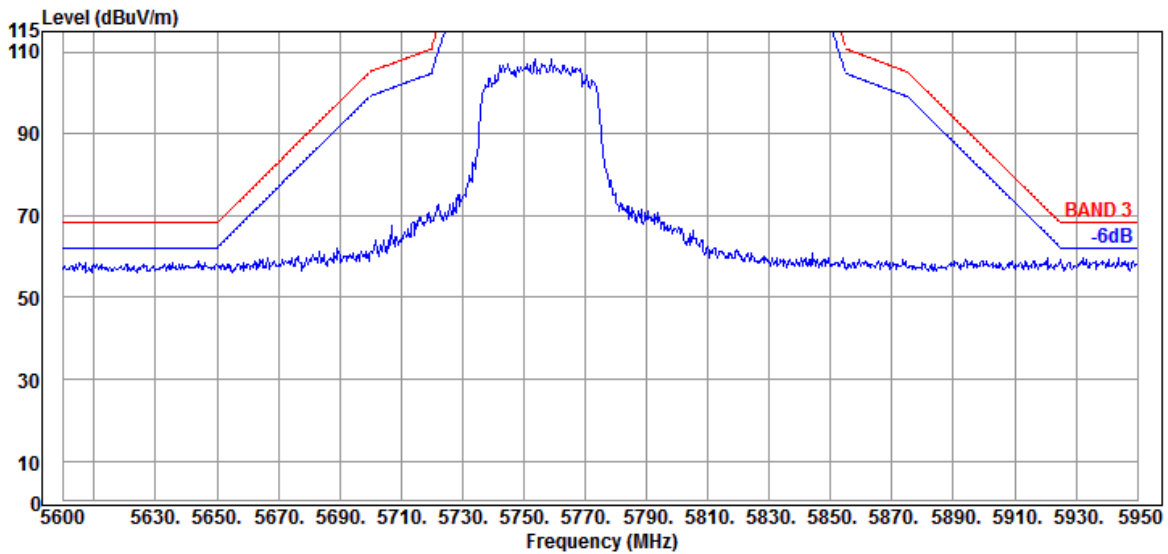


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| RU Configuration | 484/66 | Frequency | TX 5775MHz |


Antenna at Horizontal Polarization

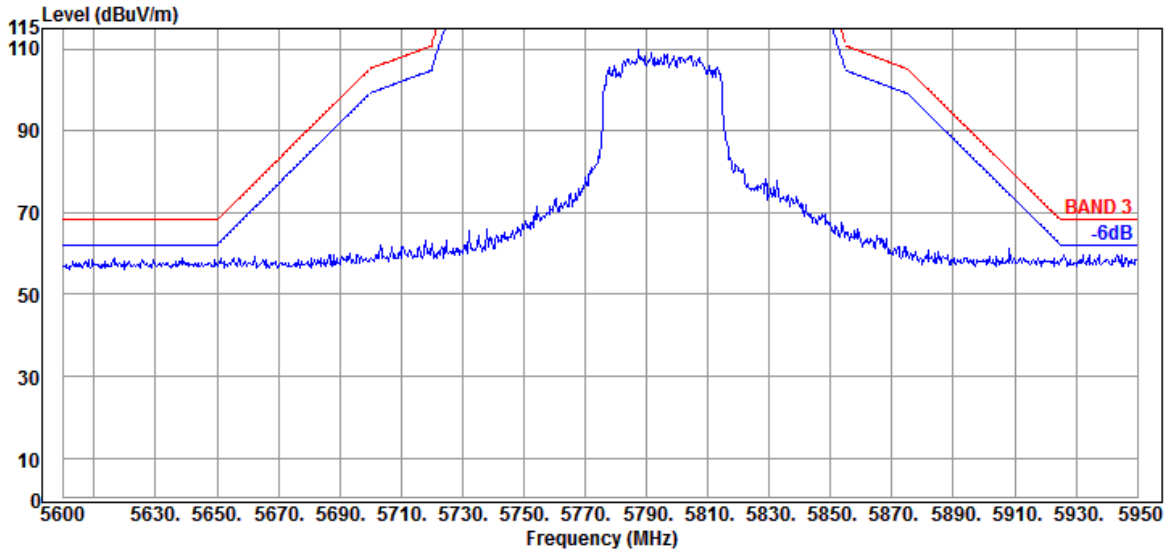

Antenna at Vertical Polarization

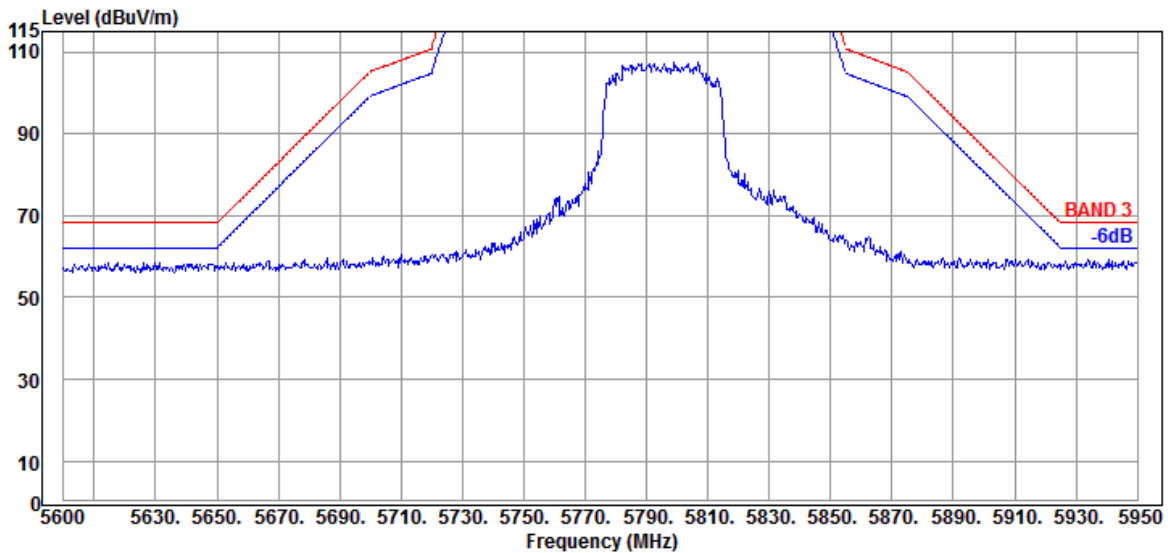


| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/67 | Frequency | TX 5250MHz |

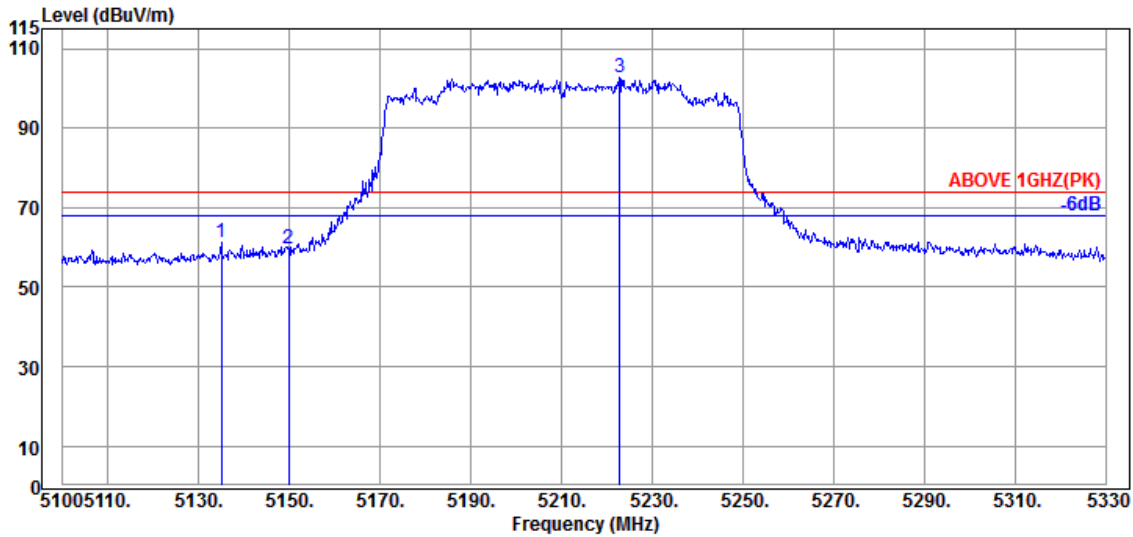

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5134.960 | 34.40 | 8.88 | 34.34 | 52.44 | 61.38 | 74.00 | 12.62 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 50.82 | 59.86 | 74.00 | 14.14 | Peak |
| @ 5222.820 | 34.60 | 8.93 | 34.31 | 93.36 | 102.58 | --- | --- | Peak |

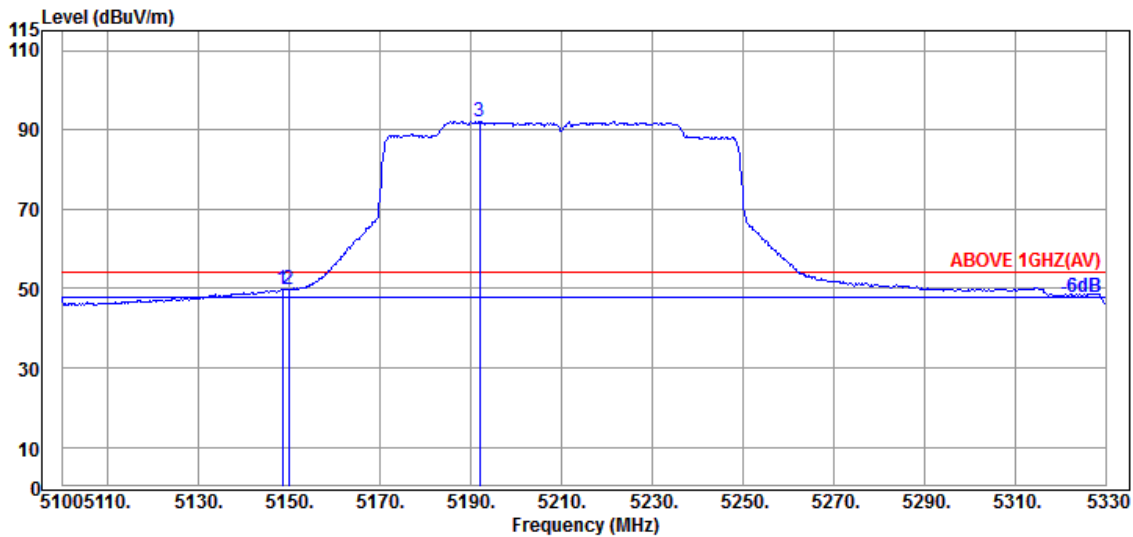


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.530 | 34.50 | 8.88 | 34.34 | 40.79 | 49.83 | 54.00 | 4.17 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 40.56 | 49.60 | 54.00 | 4.40 | Average |
| @ 5192.000 | 34.70 | 8.91 | 34.32 | 82.93 | 92.22 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/67 | Frequency | TX 5250MHz |

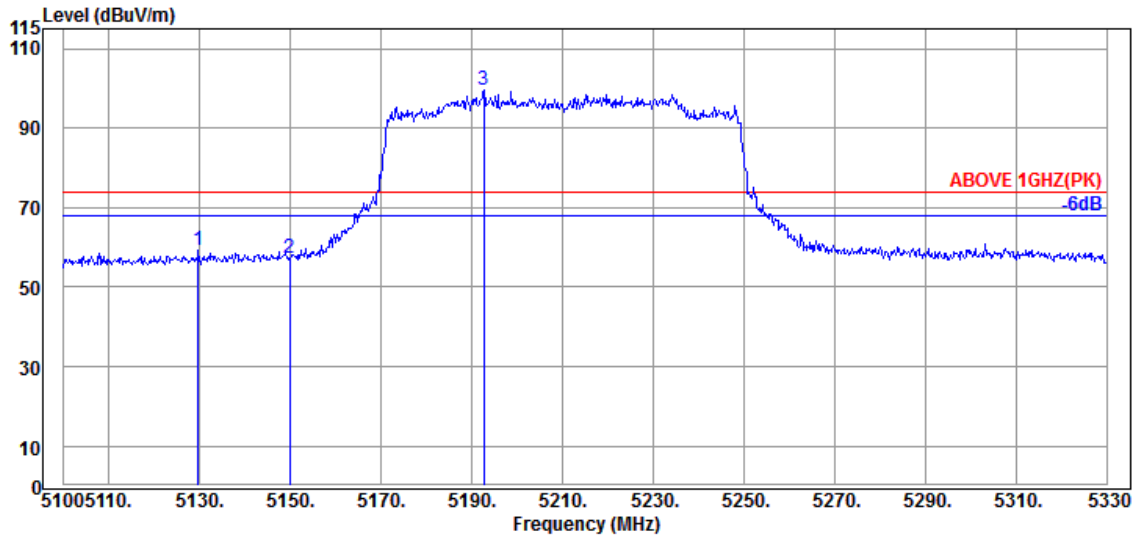

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5129.670 | 34.40 | 8.88 | 34.34 | 50.38 | 59.32 | 74.00 | 14.68 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 48.27 | 57.31 | 74.00 | 16.69 | Peak |
| @ 5192.690 | 34.70 | 8.91 | 34.32 | 90.15 | 99.44 | --- | --- | Peak |

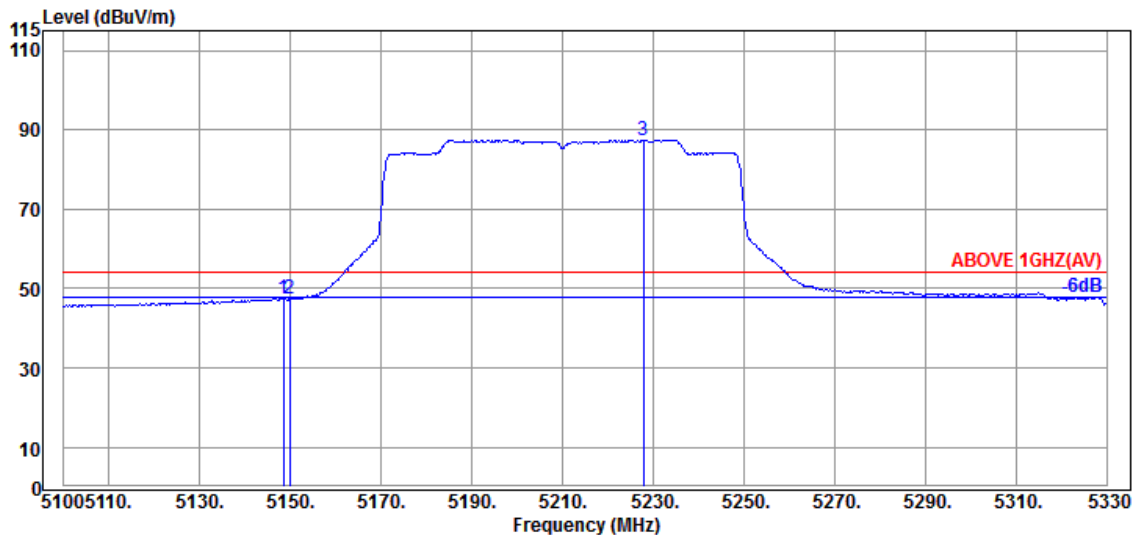


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.530 | 34.50 | 8.88 | 34.34 | 38.54 | 47.58 | 54.00 | 6.42 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 38.30 | 47.34 | 54.00 | 6.66 | Average |
| @ 5227.880 | 34.60 | 8.93 | 34.30 | 78.28 | 87.51 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/S67 | Frequency | TX 5250MHz |

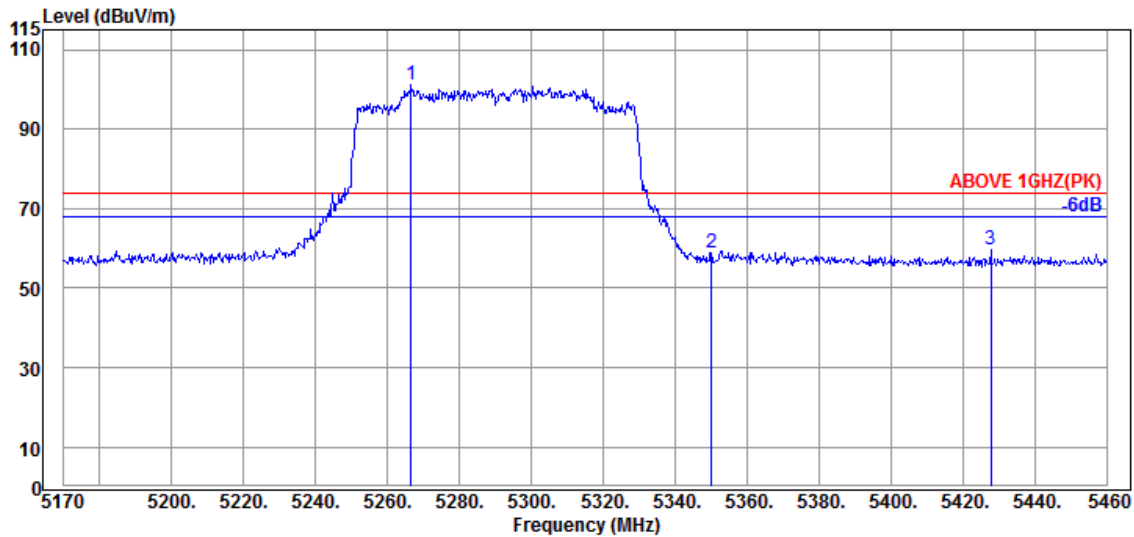

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5266.570 | 34.47 | 8.95 | 34.29 | 92.09 | 101.22 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 49.20 | 58.83 | 74.00 | 15.17 | Peak |
| 5427.810 | 34.70 | 9.04 | 34.23 | 50.00 | 59.51 | 74.00 | 14.49 | Peak |

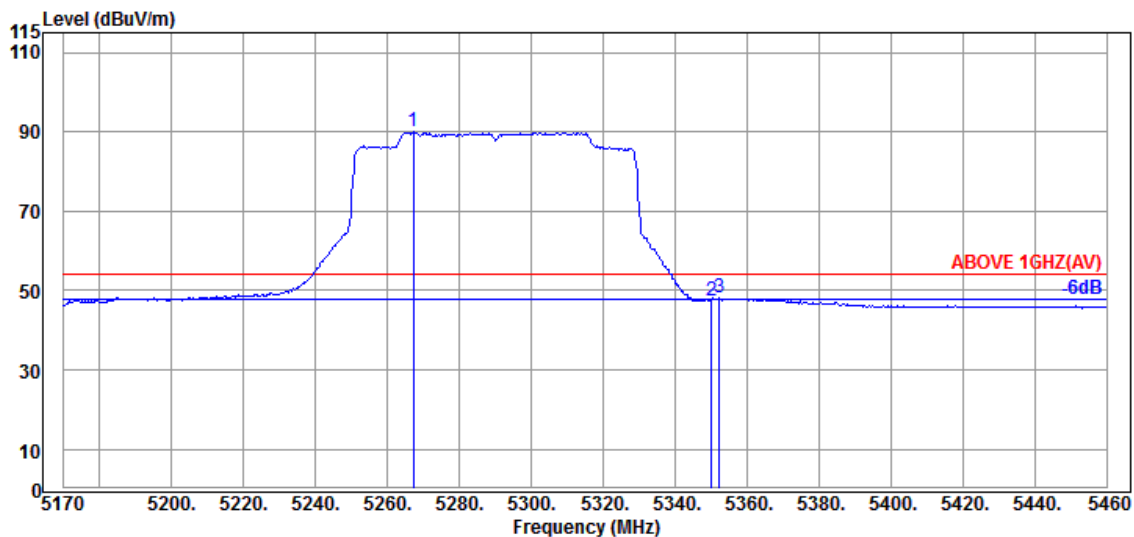


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5267.150 | 34.47 | 8.95 | 34.29 | 80.81 | 89.94 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 37.81 | 47.44 | 54.00 | 6.56 | Average |
| 5352.410 | 34.90 | 8.99 | 34.26 | 38.64 | 48.27 | 54.00 | 5.73 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/S67 | Frequency | TX 5250MHz |

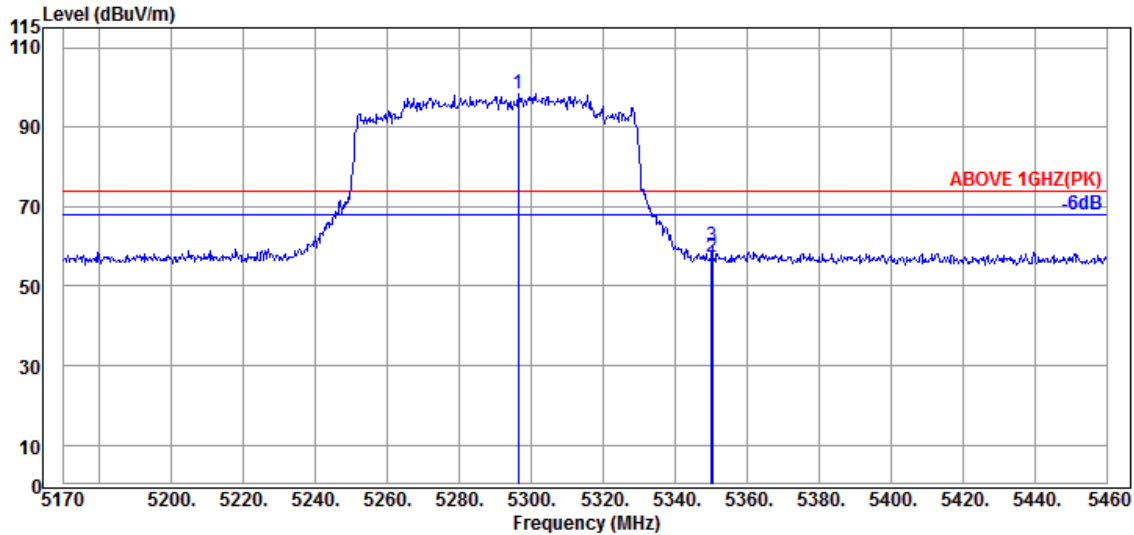

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5296.440 | 34.40 | 8.97 | 34.28 | 89.38 | 98.47 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 47.81 | 57.44 | 74.00 | 16.56 | Peak |
| 5350.380 | 34.90 | 8.99 | 34.26 | 50.32 | 59.95 | 74.00 | 14.05 | Peak |

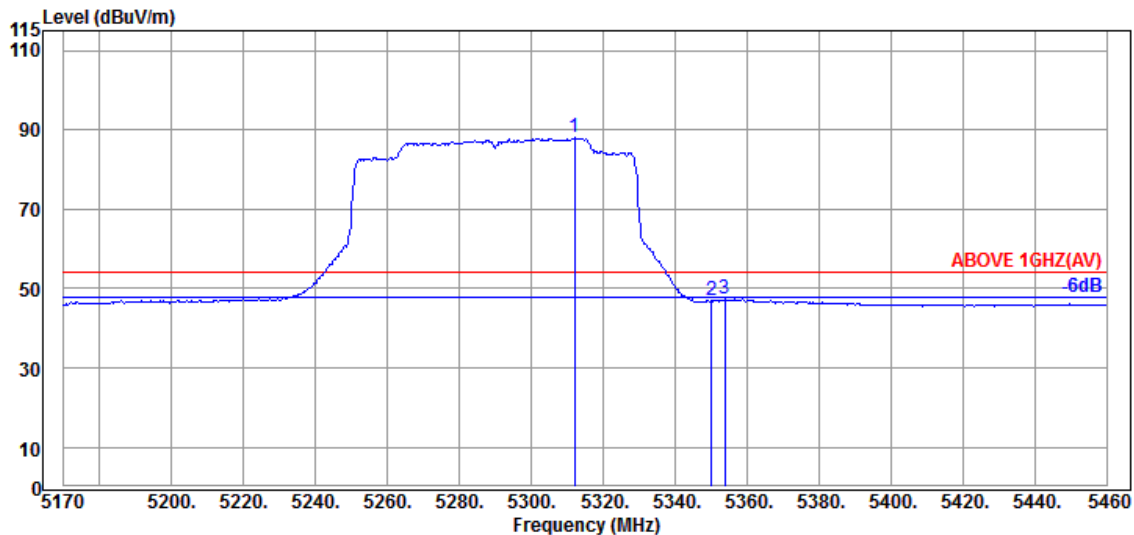


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5312.100 | 34.57 | 8.98 | 34.27 | 78.69 | 87.97 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 37.24 | 46.87 | 54.00 | 7.13 | Average |
| 5353.860 | 34.90 | 8.99 | 34.26 | 37.73 | 47.36 | 54.00 | 6.64 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/67 | Frequency | TX 5570MHz |

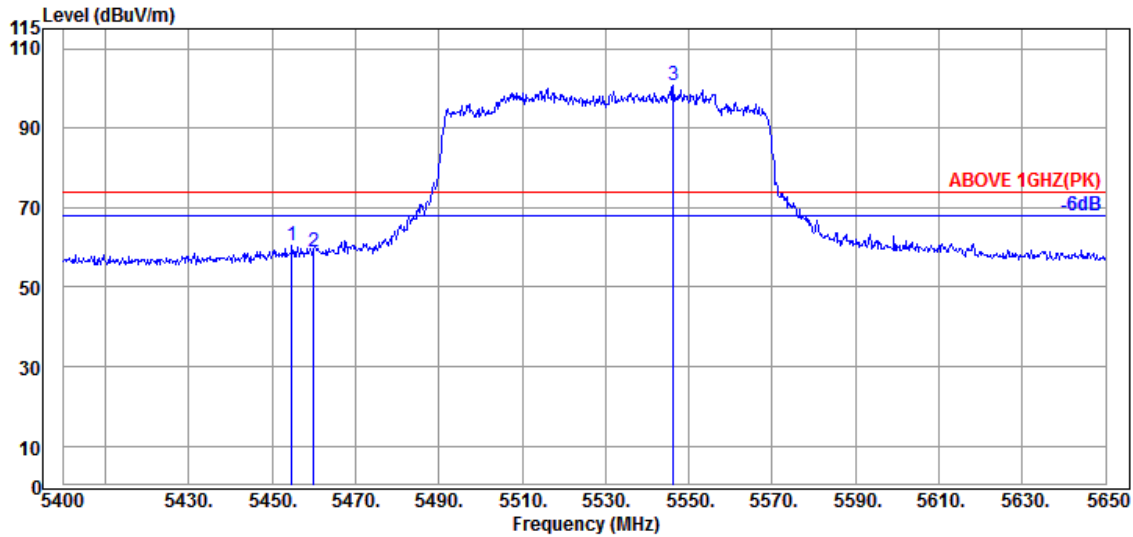

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5454.750 | 34.60 | 9.05 | 34.21 | 51.10 | 60.54 | 74.00 | 13.46 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 49.32 | 58.76 | 74.00 | 15.24 | Peak |
| @ 5546.250 | 34.70 | 9.10 | 34.23 | 91.34 | 100.91 | --- | --- | Peak |

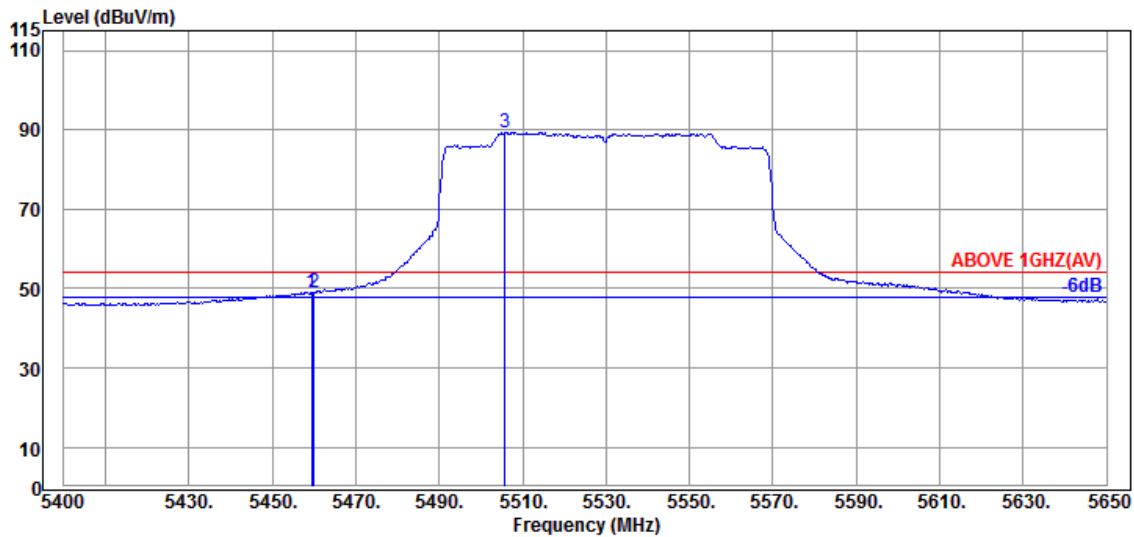


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.500 | 34.60 | 9.05 | 34.21 | 39.55 | 48.99 | 54.00 | 5.01 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 39.66 | 49.10 | 54.00 | 4.90 | Average |
| @ 5505.750 | 34.70 | 9.08 | 34.21 | 79.72 | 89.29 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/67 | Frequency | TX 5570MHz |

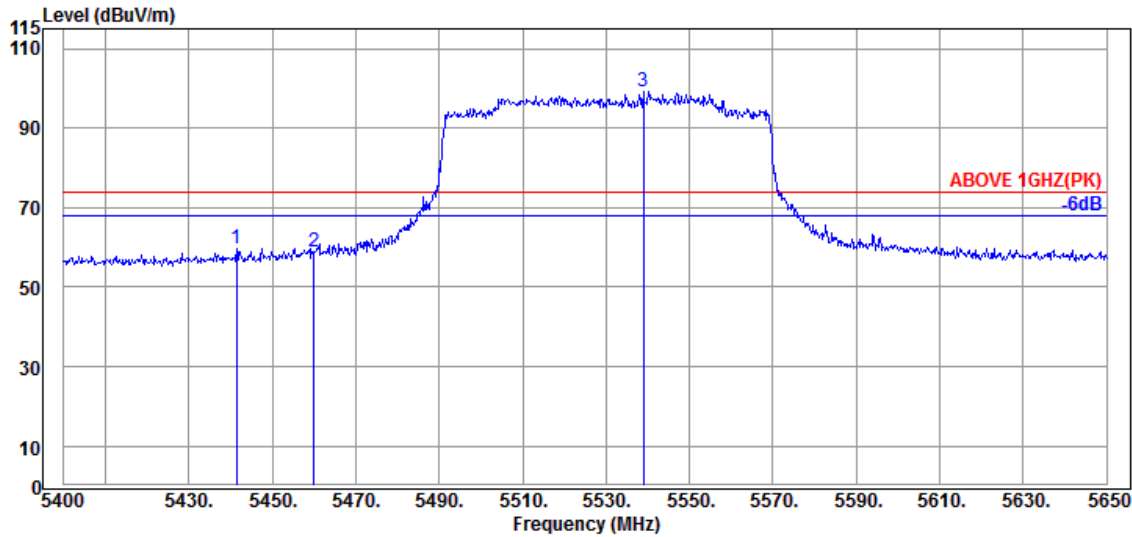

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5441.500 | 34.65 | 9.04 | 34.22 | 50.26 | 59.73 | 74.00 | 14.27 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 49.48 | 58.92 | 74.00 | 15.08 | Peak |
| @ 5539.000 | 34.70 | 9.09 | 34.22 | 89.75 | 99.32 | --- | --- | Peak |

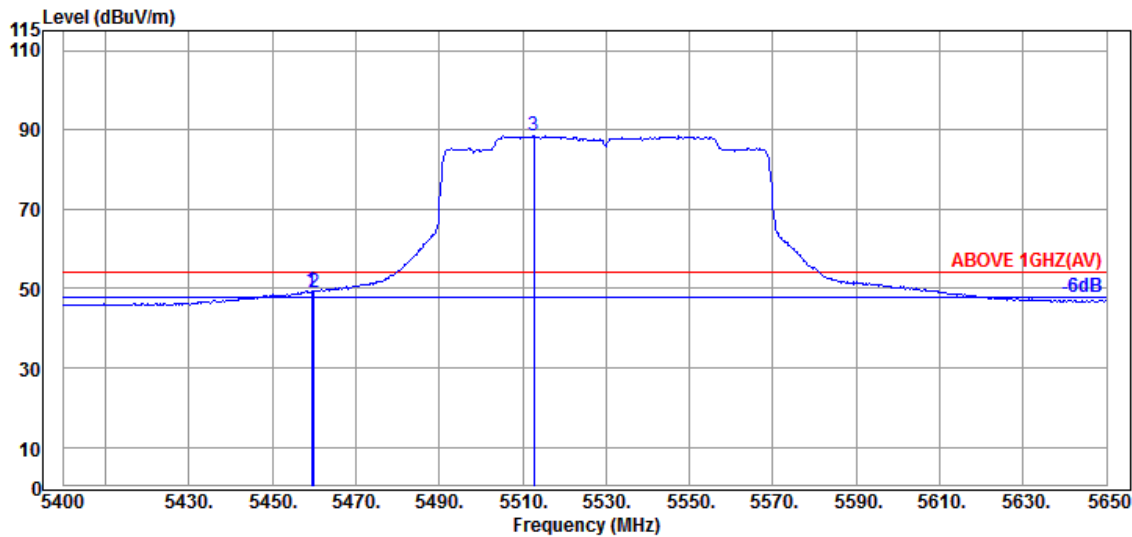


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.500 | 34.60 | 9.05 | 34.21 | 40.01 | 49.45 | 54.00 | 4.55 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 39.66 | 49.10 | 54.00 | 4.90 | Average |
| @ 5512.750 | 34.70 | 9.09 | 34.21 | 78.82 | 88.40 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/67 | Frequency | TX 5570MHz |

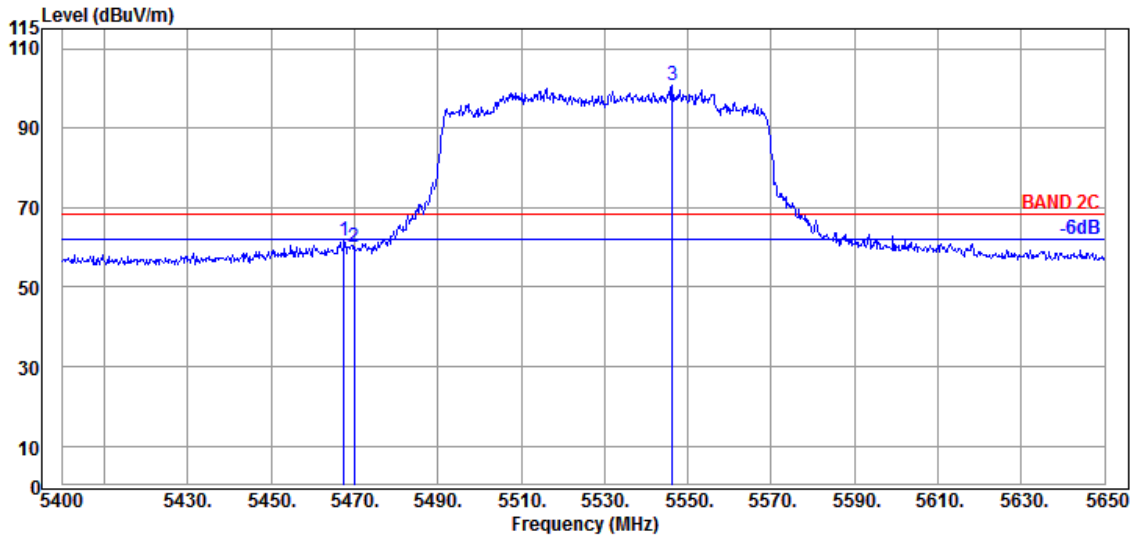

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.500 | 34.63 | 9.06 | 34.21 | 52.34 | 61.82 | 68.20 | 6.38 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 50.70 | 60.18 | 68.20 | 8.02 | Peak |
| @ 5546.250 | 34.70 | 9.10 | 34.23 | 91.34 | 100.91 | --- | --- | Peak |

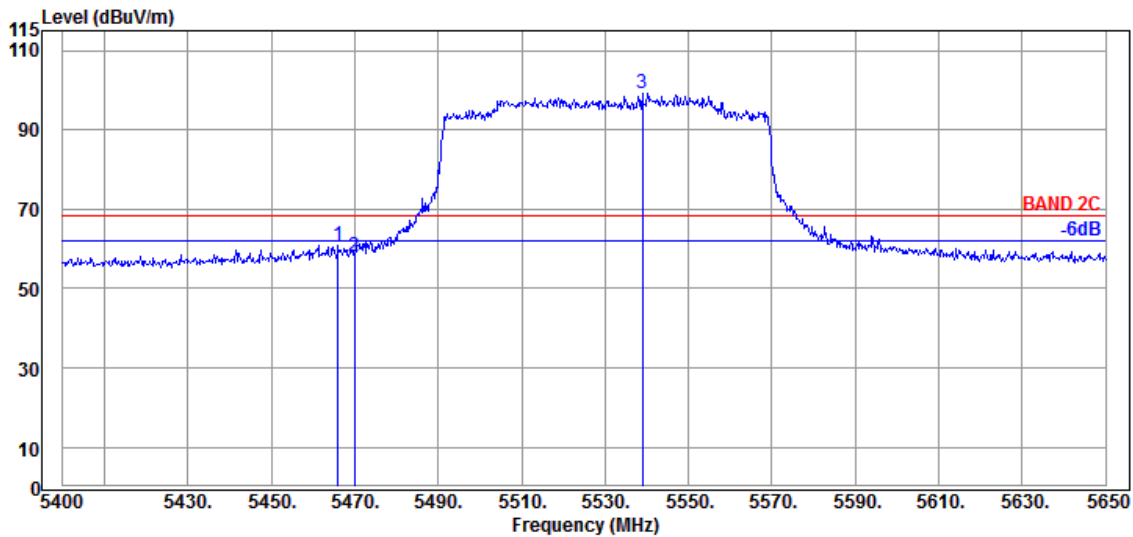


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.000 | 34.63 | 9.06 | 34.21 | 51.51 | 60.99 | 68.20 | 7.21 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 48.51 | 57.99 | 68.20 | 10.21 | Peak |
| @ 5539.000 | 34.70 | 9.09 | 34.22 | 89.75 | 99.32 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/S67 | Frequency | TX 5570MHz |

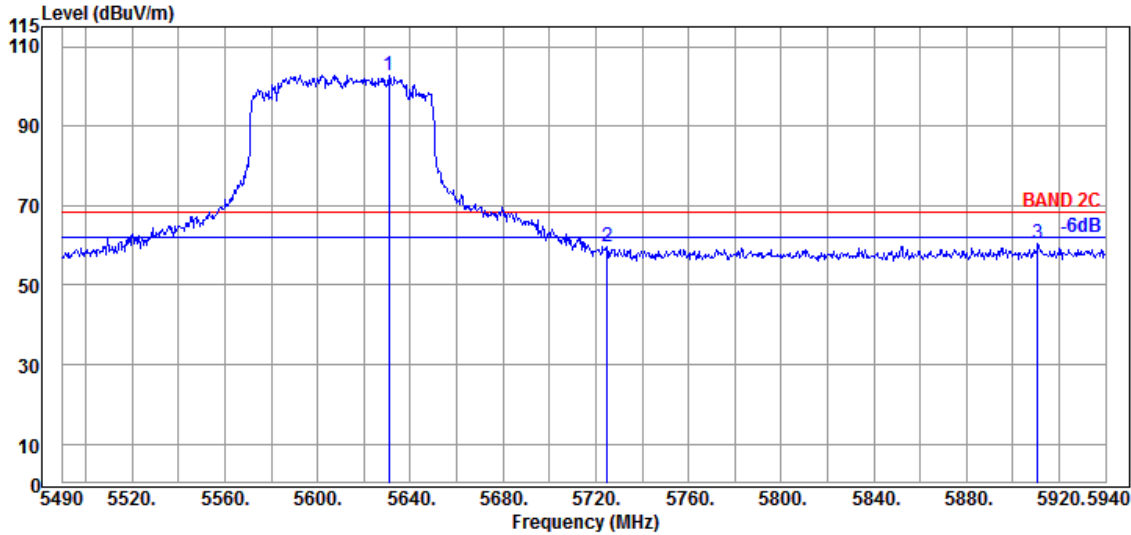

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5630.850 | 34.47 | 9.14 | 34.26 | 93.60 | 102.95 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 49.97 | 59.77 | 68.20 | 8.43 | Peak |
| 5910.750 | 35.77 | 9.29 | 34.39 | 49.63 | 60.30 | 68.20 | 7.90 | Peak |

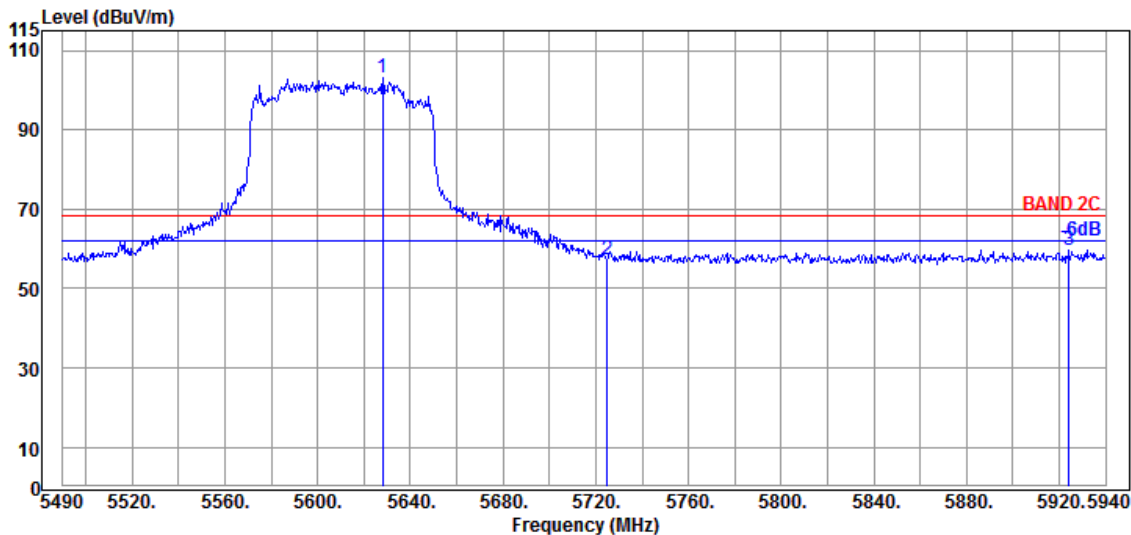

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5628.150 | 34.47 | 9.14 | 34.26 | 93.98 | 103.33 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 47.46 | 57.26 | 68.20 | 10.94 | Peak |
| 5924.250 | 35.73 | 9.30 | 34.40 | 49.07 | 59.70 | 68.20 | 8.50 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303


Spot Check With SKU #2(with LUXSHARE-ICT ANT)

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/53 | Frequency | TX 5700MHz |

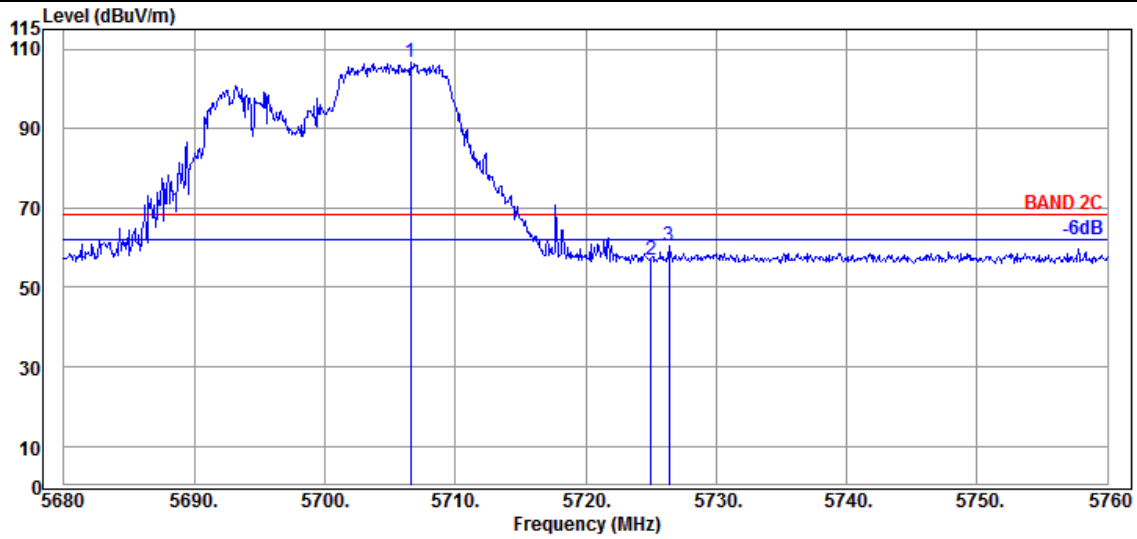

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5706.560 | 34.80 | 9.19 | 34.29 | 97.07 | 106.77 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 46.93 | 56.73 | 68.20 | 11.47 | Peak |
| @ 5726.400 | 34.90 | 9.20 | 34.31 | 50.80 | 60.59 | 68.20 | 7.61 | Peak |

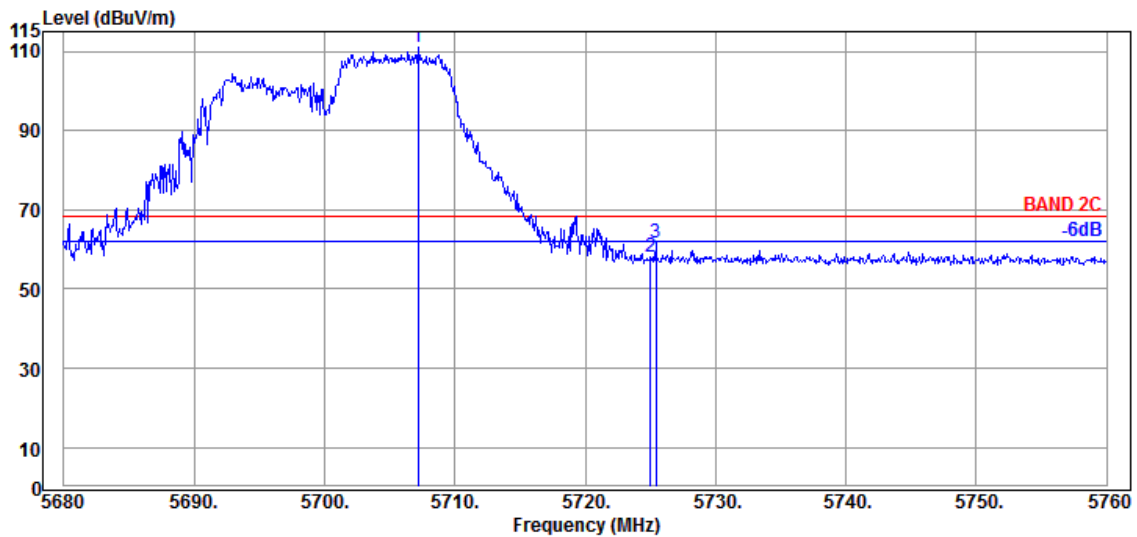

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5707.200 | 34.80 | 9.19 | 34.29 | 101.29 | 110.99 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 48.32 | 58.12 | 68.20 | 10.08 | Peak |
| @ 5725.440 | 34.90 | 9.20 | 34.30 | 51.81 | 61.61 | 68.20 | 6.59 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Spot Check With SKU #2(with INPAQ ANT)

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

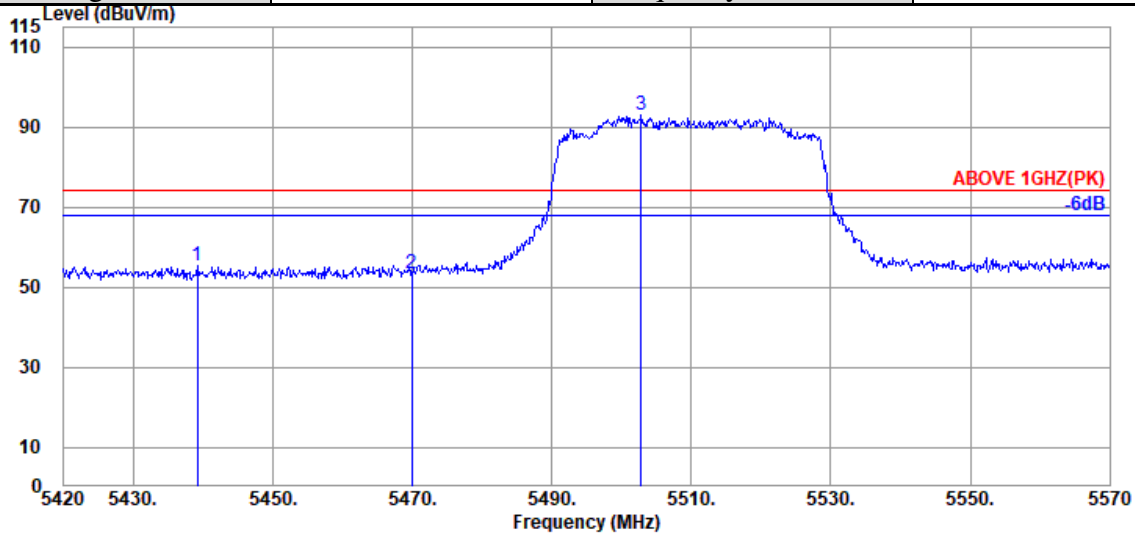
Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5439.200 | 34.17 | 9.04 | 39.26 | 51.33 | 55.28 | 74.00 | 18.72 | Peak |
| 5469.950 | 34.17 | 9.06 | 39.26 | 49.43 | 53.40 | 74.00 | 20.60 | Peak |
| @ 5502.800 | 34.10 | 9.08 | 39.26 | 89.14 | 93.06 | --- | --- | Peak |

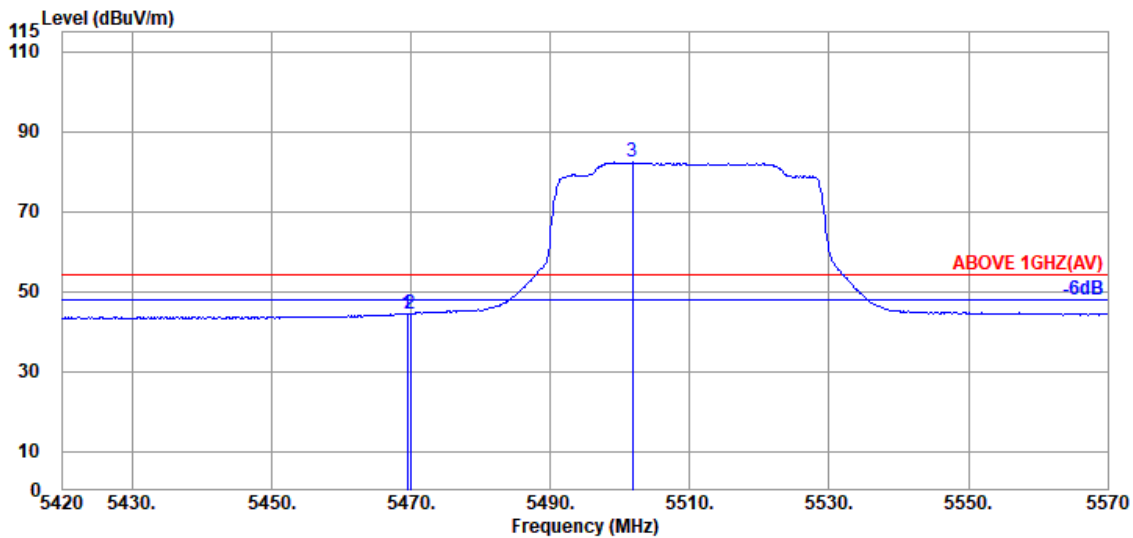
Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.500 | 34.17 | 9.06 | 39.26 | 40.48 | 44.45 | 54.00 | 9.55 | Average |
| 5469.950 | 34.17 | 9.06 | 39.26 | 40.41 | 44.38 | 54.00 | 9.62 | Average |
| @ 5501.750 | 34.10 | 9.08 | 39.26 | 78.47 | 82.39 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

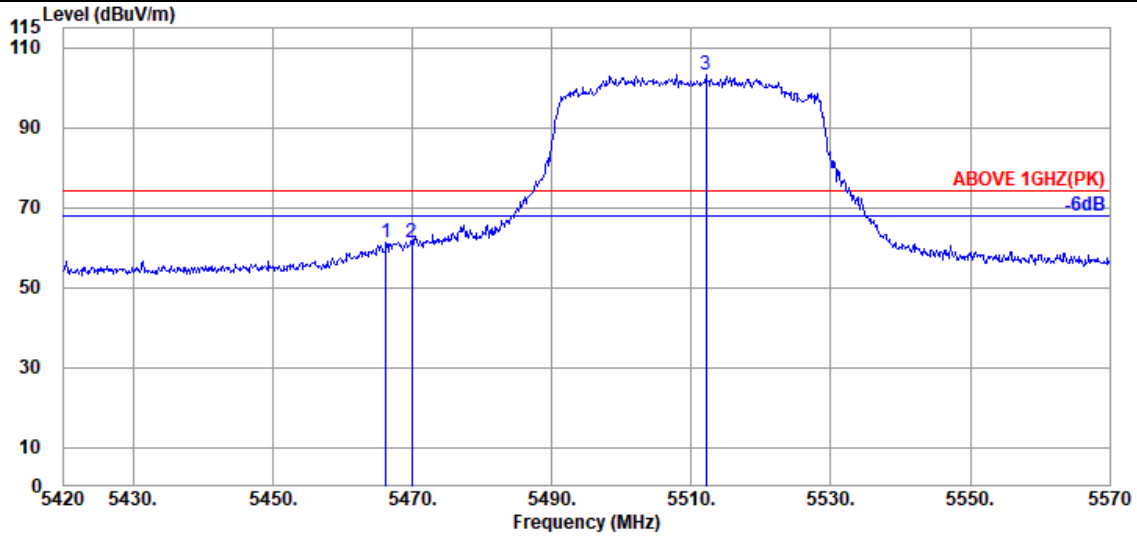

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.200 | 34.17 | 9.06 | 39.26 | 57.34 | 61.31 | 74.00 | 12.69 | Peak |
| 5469.950 | 34.17 | 9.06 | 39.26 | 57.24 | 61.21 | 74.00 | 12.79 | Peak |
| @ 5512.100 | 34.10 | 9.09 | 39.26 | 99.37 | 103.30 | --- | --- | Peak |

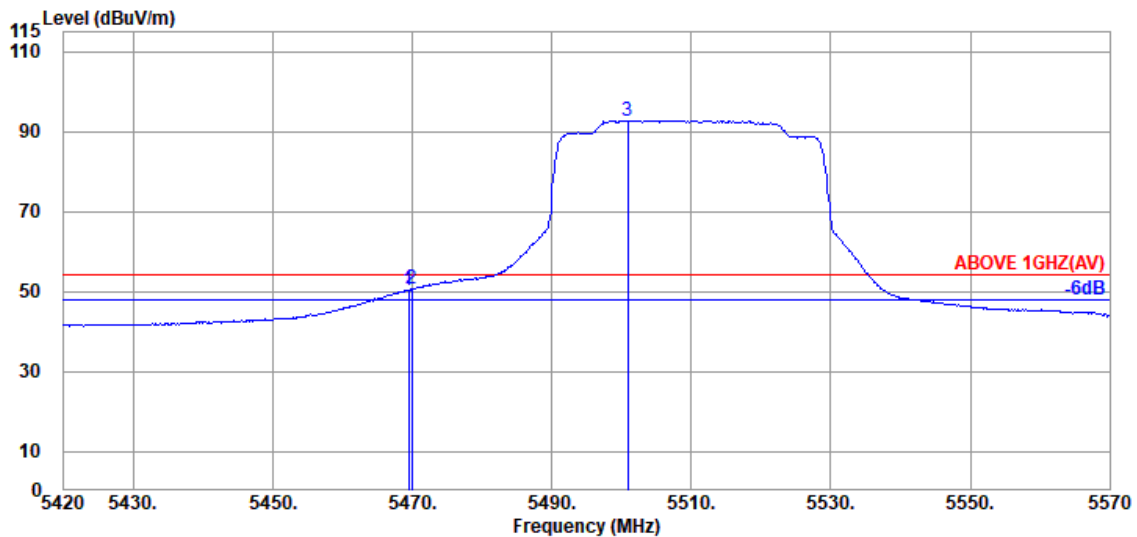

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5469.500 | 34.17 | 9.06 | 39.26 | 46.38 | 50.35 | 54.00 | 3.65 | Average |
| 5469.950 | 34.17 | 9.06 | 39.26 | 46.71 | 50.68 | 54.00 | 3.32 | Average |
| @ 5500.850 | 34.10 | 9.08 | 39.26 | 88.87 | 92.79 | --- | --- | Average |

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

● Test SKU #1 (with LUXSHARE-ICT Antenna)

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | I |
| | | Frequency | TX 5180MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 38.10 | 12.61 | 39.53 | 35.08 | 46.26 | 54.00 | 7.74 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 38.10 | 12.61 | 39.53 | 36.59 | 47.77 | 54.00 | 6.23 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2A |
| | | Frequency | TX 5320MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 38.40 | 12.82 | 39.24 | 35.95 | 47.93 | 54.00 | 6.07 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 38.40 | 12.82 | 39.24 | 34.91 | 46.89 | 54.00 | 7.11 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C |
| | | Frequency | TX 5500MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 38.10 | 12.61 | 39.53 | 36.59 | 47.77 | 54.00 | 6.23 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11000.000 | 38.70 | 13.09 | 39.03 | 36.27 | 49.03 | 54.00 | 4.97 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.97 | 13.55 | 39.13 | 35.97 | 49.36 | 54.00 | 4.64 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.97 | 13.55 | 39.13 | 35.10 | 48.49 | 54.00 | 5.51 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 3 |
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 39.27 | 13.76 | 39.21 | 35.91 | 49.73 | 54.00 | 4.27 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 39.27 | 13.76 | 39.21 | 35.53 | 49.35 | 54.00 | 4.65 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 1 |
| | | Frequency | TX 5240MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 38.25 | 12.70 | 39.36 | 36.91 | 48.50 | 54.00 | 5.50 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 38.25 | 12.70 | 39.36 | 35.64 | 47.23 | 54.00 | 6.77 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2A |
| | | Frequency | TX 5260MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 38.30 | 12.73 | 39.32 | 35.77 | 47.48 | 54.00 | 6.52 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 38.30 | 12.73 | 39.32 | 36.17 | 47.88 | 54.00 | 6.12 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5700MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.90 | 13.51 | 39.12 | 35.30 | 48.59 | 54.00 | 5.41 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.90 | 13.51 | 39.12 | 34.77 | 48.06 | 54.00 | 5.94 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11440.000 | 38.97 | 13.55 | 39.13 | 35.08 | 48.47 | 54.00 | 5.53 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11440.000 | 38.97 | 13.55 | 39.13 | 34.81 | 48.20 | 54.00 | 5.80 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 3 |
| | | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11490.000 | 39.10 | 13.61 | 39.14 | 35.70 | 49.27 | 54.00 | 4.73 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11490.000 | 39.10 | 13.61 | 39.14 | 36.20 | 49.77 | 54.00 | 4.23 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | I |
| | | Frequency | TX 5230MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 38.20 | 12.68 | 39.40 | 35.69 | 47.17 | 54.00 | 6.83 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 38.20 | 12.68 | 39.40 | 35.38 | 46.86 | 54.00 | 7.14 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A |
| | | Frequency | TX 5270MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 38.33 | 12.75 | 39.30 | 35.40 | 47.18 | 54.00 | 6.82 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 38.33 | 12.75 | 39.30 | 36.54 | 48.32 | 54.00 | 5.68 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5550MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.70 | 13.19 | 39.05 | 35.75 | 48.59 | 54.00 | 5.41 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.70 | 13.19 | 39.05 | 35.30 | 48.14 | 54.00 | 5.86 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.97 | 13.55 | 39.12 | 35.39 | 48.79 | 54.00 | 5.21 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.97 | 13.55 | 39.12 | 35.47 | 48.87 | 54.00 | 5.13 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 39.10 | 13.61 | 39.16 | 35.11 | 48.66 | 54.00 | 5.34 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 39.10 | 13.61 | 39.16 | 36.36 | 49.91 | 54.00 | 4.09 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 38.15 | 12.66 | 39.44 | 35.70 | 47.07 | 54.00 | 6.93 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 38.15 | 12.66 | 39.44 | 36.08 | 47.45 | 54.00 | 6.55 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 38.37 | 12.77 | 39.28 | 36.04 | 47.90 | 54.00 | 6.10 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 38.37 | 12.77 | 39.28 | 35.70 | 47.56 | 54.00 | 6.44 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.80 | 13.30 | 39.08 | 36.63 | 49.65 | 54.00 | 4.35 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.80 | 13.30 | 39.08 | 35.47 | 48.49 | 54.00 | 5.51 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.83 | 13.48 | 39.11 | 34.37 | 47.57 | 54.00 | 6.43 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.83 | 13.48 | 39.11 | 35.38 | 48.58 | 54.00 | 5.42 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 39.13 | 13.65 | 39.18 | 35.69 | 49.29 | 54.00 | 4.71 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 39.13 | 13.65 | 39.18 | 35.88 | 49.48 | 54.00 | 4.52 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 38.30 | 12.73 | 39.32 | 35.15 | 46.86 | 54.00 | 7.14 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 38.30 | 12.73 | 39.32 | 35.41 | 47.12 | 54.00 | 6.88 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.73 | 13.23 | 39.06 | 35.33 | 48.23 | 54.00 | 5.77 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.73 | 13.23 | 39.06 | 35.71 | 48.61 | 54.00 | 5.39 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| | | Frequency | TX 5240MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 38.25 | 12.70 | 39.36 | 34.77 | 46.36 | 54.00 | 7.64 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 38.25 | 12.70 | 39.36 | 36.29 | 47.88 | 54.00 | 6.12 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| | | Frequency | TX 5260MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 38.30 | 12.73 | 39.32 | 35.08 | 46.79 | 54.00 | 7.21 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 38.30 | 12.73 | 39.32 | 37.17 | 48.88 | 54.00 | 5.12 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5580MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000 | 38.77 | 13.27 | 39.06 | 35.61 | 48.59 | 54.00 | 5.41 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000 | 38.77 | 13.27 | 39.06 | 35.46 | 48.44 | 54.00 | 5.56 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.97 | 13.55 | 39.13 | 35.62 | 49.01 | 54.00 | 4.99 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.97 | 13.55 | 39.13 | 35.07 | 48.46 | 54.00 | 5.54 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| | | Frequency | TX 5785MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 39.17 | 13.69 | 39.18 | 34.78 | 48.46 | 54.00 | 5.54 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 39.17 | 13.69 | 39.18 | 35.45 | 49.13 | 54.00 | 4.87 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| | | Frequency | TX 5230MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 38.20 | 12.68 | 39.40 | 35.64 | 47.12 | 54.00 | 6.88 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 38.20 | 12.68 | 39.40 | 35.68 | 47.16 | 54.00 | 6.84 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| | | Frequency | TX 5270MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 38.33 | 12.75 | 39.30 | 35.35 | 47.13 | 54.00 | 6.87 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 38.33 | 12.75 | 39.30 | 35.17 | 46.95 | 54.00 | 7.05 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5550MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.70 | 13.19 | 39.05 | 34.77 | 47.61 | 54.00 | 6.39 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.70 | 13.19 | 39.05 | 35.32 | 48.16 | 54.00 | 5.84 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.97 | 13.55 | 39.12 | 34.75 | 48.15 | 54.00 | 5.85 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.97 | 13.55 | 39.12 | 34.54 | 47.94 | 54.00 | 6.06 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 39.10 | 13.61 | 39.16 | 35.63 | 49.18 | 54.00 | 4.82 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 39.10 | 13.61 | 39.16 | 36.52 | 50.07 | 54.00 | 3.93 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 38.15 | 12.66 | 39.44 | 36.75 | 48.12 | 54.00 | 5.88 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 38.15 | 12.66 | 39.44 | 35.94 | 47.31 | 54.00 | 6.69 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 38.37 | 12.77 | 39.28 | 35.66 | 47.52 | 54.00 | 6.48 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 38.37 | 12.77 | 39.28 | 35.87 | 47.73 | 54.00 | 6.27 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.80 | 13.30 | 39.08 | 35.04 | 48.06 | 54.00 | 5.94 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.80 | 13.30 | 39.08 | 35.24 | 48.26 | 54.00 | 5.74 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.83 | 13.48 | 39.11 | 35.23 | 48.43 | 54.00 | 5.57 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.83 | 13.48 | 39.11 | 35.51 | 48.71 | 54.00 | 5.29 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 39.13 | 13.65 | 39.18 | 35.84 | 49.44 | 54.00 | 4.56 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 39.13 | 13.65 | 39.18 | 36.28 | 49.88 | 54.00 | 4.12 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 38.30 | 12.73 | 39.32 | 36.91 | 48.62 | 54.00 | 5.38 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 38.30 | 12.73 | 39.32 | 35.61 | 47.32 | 54.00 | 6.68 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.73 | 13.23 | 39.06 | 35.14 | 48.04 | 54.00 | 5.96 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.73 | 13.23 | 39.06 | 36.17 | 49.07 | 54.00 | 4.93 | Peak |

● Test SKU #1 (with INPAQ Antenna)

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | I |
| | | Frequency | TX 5180MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 37.60 | 12.61 | 34.79 | 33.96 | 49.38 | 54.00 | 4.62 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 37.60 | 12.61 | 34.79 | 34.83 | 50.25 | 54.00 | 3.75 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2A |
| | | Frequency | TX 5320MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 32.93 | 49.12 | 54.00 | 4.88 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 32.39 | 48.58 | 54.00 | 5.42 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C |
| | | Frequency | TX 5500MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11000.000 | 38.10 | 13.09 | 34.51 | 33.07 | 49.75 | 54.00 | 4.25 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11000.000 | 38.10 | 13.09 | 34.51 | 32.41 | 49.09 | 54.00 | 4.91 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 32.13 | 49.53 | 54.00 | 4.47 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 32.68 | 50.08 | 54.00 | 3.92 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 3 |
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 32.82 | 50.45 | 54.00 | 3.55 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 33.64 | 51.27 | 54.00 | 2.73 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 1 |
| | | Frequency | TX 5240MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 37.75 | 12.70 | 34.67 | 34.04 | 49.82 | 54.00 | 4.18 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 37.75 | 12.70 | 34.67 | 33.69 | 49.47 | 54.00 | 4.53 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2A |
| | | Frequency | TX 5260MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 37.80 | 12.73 | 34.64 | 33.01 | 48.90 | 54.00 | 5.10 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 37.80 | 12.73 | 34.64 | 33.45 | 49.34 | 54.00 | 4.66 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5700MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.30 | 13.51 | 34.52 | 33.08 | 50.37 | 54.00 | 3.63 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.30 | 13.51 | 34.52 | 32.85 | 50.14 | 54.00 | 3.86 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 32.45 | 49.85 | 54.00 | 4.15 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 33.42 | 50.82 | 54.00 | 3.18 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 3 |
| | | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11490.000 | 38.50 | 13.61 | 34.52 | 32.30 | 49.89 | 54.00 | 4.11 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11490.000 | 38.50 | 13.61 | 34.52 | 32.49 | 50.08 | 54.00 | 3.92 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | I |
| | | Frequency | TX 5230MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 33.66 | 49.34 | 54.00 | 4.66 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 34.38 | 50.06 | 54.00 | 3.94 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A |
| | | Frequency | TX 5270MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 33.77 | 49.72 | 54.00 | 4.28 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 32.82 | 48.77 | 54.00 | 5.23 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5550MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.10 | 13.19 | 34.51 | 32.24 | 49.02 | 54.00 | 4.98 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.10 | 13.19 | 34.51 | 32.17 | 48.95 | 54.00 | 5.05 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 32.77 | 50.17 | 54.00 | 3.83 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 32.66 | 50.06 | 54.00 | 3.94 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 33.33 | 50.91 | 54.00 | 3.09 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 33.36 | 50.94 | 54.00 | 3.06 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 33.92 | 49.50 | 54.00 | 4.50 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 33.59 | 49.17 | 54.00 | 4.83 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 33.24 | 49.26 | 54.00 | 4.74 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 33.44 | 49.46 | 54.00 | 4.54 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 32.40 | 49.39 | 54.00 | 4.61 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 32.02 | 49.01 | 54.00 | 4.99 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 32.27 | 49.53 | 54.00 | 4.47 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 32.63 | 49.89 | 54.00 | 4.11 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 33.26 | 50.84 | 54.00 | 3.16 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 32.93 | 50.51 | 54.00 | 3.49 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 33.96 | 49.85 | 54.00 | 4.15 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 34.45 | 50.34 | 54.00 | 3.66 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 32.30 | 49.15 | 54.00 | 4.85 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 32.89 | 49.74 | 54.00 | 4.26 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| | | Frequency | TX 5240MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 37.75 | 12.70 | 34.67 | 33.68 | 49.46 | 54.00 | 4.54 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10480.000 | 37.75 | 12.70 | 34.67 | 33.25 | 49.03 | 54.00 | 4.97 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| | | Frequency | TX 5260MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 37.80 | 12.73 | 34.64 | 33.01 | 48.90 | 54.00 | 5.10 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10520.000 | 37.80 | 12.73 | 34.64 | 33.79 | 49.68 | 54.00 | 4.32 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5580MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000 | 38.17 | 13.27 | 34.51 | 33.04 | 49.97 | 54.00 | 4.03 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11160.000 | 38.17 | 13.27 | 34.51 | 32.47 | 49.40 | 54.00 | 4.60 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 32.54 | 49.94 | 54.00 | 4.06 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 32.13 | 49.53 | 54.00 | 4.47 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| | | Frequency | TX 5785MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 32.97 | 50.55 | 54.00 | 3.45 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 33.30 | 50.88 | 54.00 | 3.12 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| | | Frequency | TX 5230MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 34.15 | 49.83 | 54.00 | 4.17 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 34.39 | 50.07 | 54.00 | 3.93 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| | | Frequency | TX 5270MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 33.67 | 49.62 | 54.00 | 4.38 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 33.40 | 49.35 | 54.00 | 4.65 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5550MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.10 | 13.19 | 34.51 | 33.56 | 50.34 | 54.00 | 3.66 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11100.000 | 38.10 | 13.19 | 34.51 | 32.92 | 49.70 | 54.00 | 4.30 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 32.85 | 50.25 | 54.00 | 3.75 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 33.21 | 50.61 | 54.00 | 3.39 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 33.82 | 51.40 | 54.00 | 2.60 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 32.89 | 50.47 | 54.00 | 3.53 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 33.49 | 49.07 | 54.00 | 4.93 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 35.90 | 51.48 | 54.00 | 2.52 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 33.20 | 49.22 | 54.00 | 4.78 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 33.68 | 49.70 | 54.00 | 4.30 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 32.88 | 49.87 | 54.00 | 4.13 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 33.27 | 50.26 | 54.00 | 3.74 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 32.08 | 49.34 | 54.00 | 4.66 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 32.07 | 49.33 | 54.00 | 4.67 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 33.04 | 50.62 | 54.00 | 3.38 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 34.51 | 52.09 | 54.00 | 1.91 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 32.91 | 48.80 | 54.00 | 5.20 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 32.62 | 48.51 | 54.00 | 5.49 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 33.51 | 50.36 | 54.00 | 3.64 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 32.40 | 49.25 | 54.00 | 4.75 | Peak |

Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 3 |
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 30.78 | 48.41 | 54.00 | 5.59 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 31.55 | 49.18 | 54.00 | 4.82 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 16.09 | 34.52 | 28.33 | 48.27 | 54.00 | 5.73 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 29.90 | 47.30 | 54.00 | 6.70 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 30.20 | 47.78 | 54.00 | 6.22 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 31.54 | 49.12 | 54.00 | 4.88 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 30.20 | 47.78 | 54.00 | 6.22 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 30.88 | 48.46 | 54.00 | 5.54 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 30.98 | 46.87 | 54.00 | 7.13 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 30.67 | 46.56 | 54.00 | 7.44 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| | | Frequency | TX 5785MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 30.56 | 48.14 | 54.00 | 5.86 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 30.20 | 47.78 | 54.00 | 6.22 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 30.58 | 48.16 | 54.00 | 5.84 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 30.25 | 47.83 | 54.00 | 6.17 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 30.85 | 48.43 | 54.00 | 5.57 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 30.91 | 48.49 | 54.00 | 5.51 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 30.20 | 47.05 | 54.00 | 6.95 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 29.52 | 46.37 | 54.00 | 7.63 | Peak |

Spot Check with SKU #2 (with INPAQ ANT)

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 3 |
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 29.63 | 47.26 | 54.00 | 6.74 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 30.40 | 48.03 | 54.00 | 5.97 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 28.93 | 46.33 | 54.00 | 7.67 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 30.63 | 48.03 | 54.00 | 5.97 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 29.66 | 47.24 | 54.00 | 6.76 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 29.58 | 47.16 | 54.00 | 6.84 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 29.29 | 46.87 | 54.00 | 7.13 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 29.51 | 47.09 | 54.00 | 6.91 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 30.27 | 46.16 | 54.00 | 7.84 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 30.08 | 45.97 | 54.00 | 8.03 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| | | Frequency | TX 5785MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 29.22 | 46.80 | 54.00 | 7.20 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 29.16 | 46.74 | 54.00 | 7.26 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 30.50 | 48.08 | 54.00 | 5.92 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11510.000 | 38.50 | 13.61 | 34.53 | 29.02 | 46.60 | 54.00 | 7.40 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 30.07 | 47.65 | 54.00 | 6.35 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 28.01 | 45.59 | 54.00 | 8.41 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 31.04 | 46.93 | 54.00 | 7.07 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------------|-------------------------------|-----------------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 30.13 | 46.02 | 54.00 | 7.98 | Peak |

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.