



| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 26/0 | Frequency | TX 5180MHz |

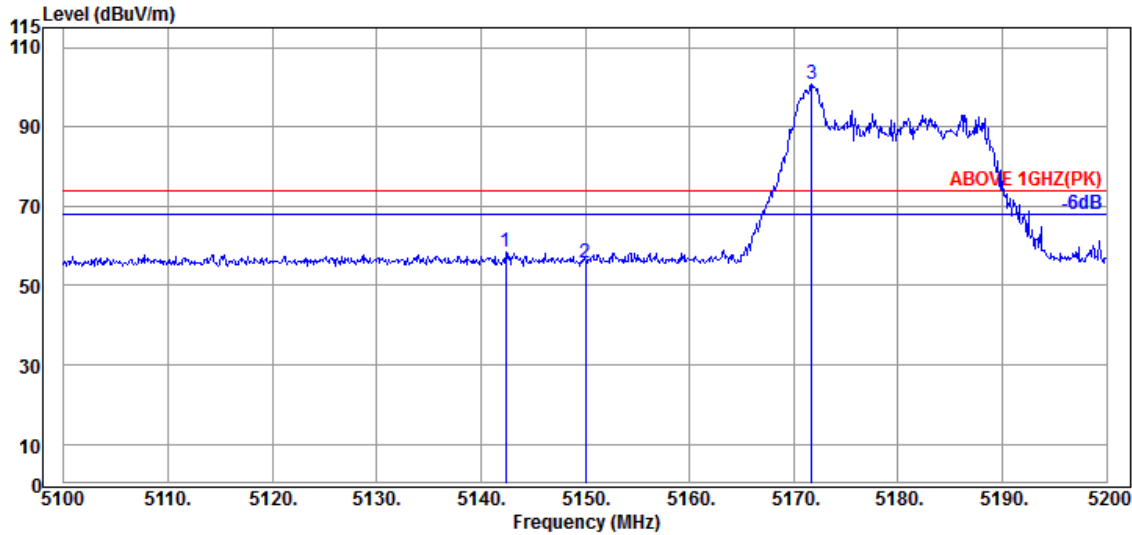

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5142.400 | 34.50 | 8.88 | 34.34 | 49.44 | 58.48 | 74.00 | 15.52 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 46.64 | 55.68 | 74.00 | 18.32 | Peak |
| @ 5171.700 | 34.63 | 8.90 | 34.33 | 91.47 | 100.67 | --- | --- | Peak |

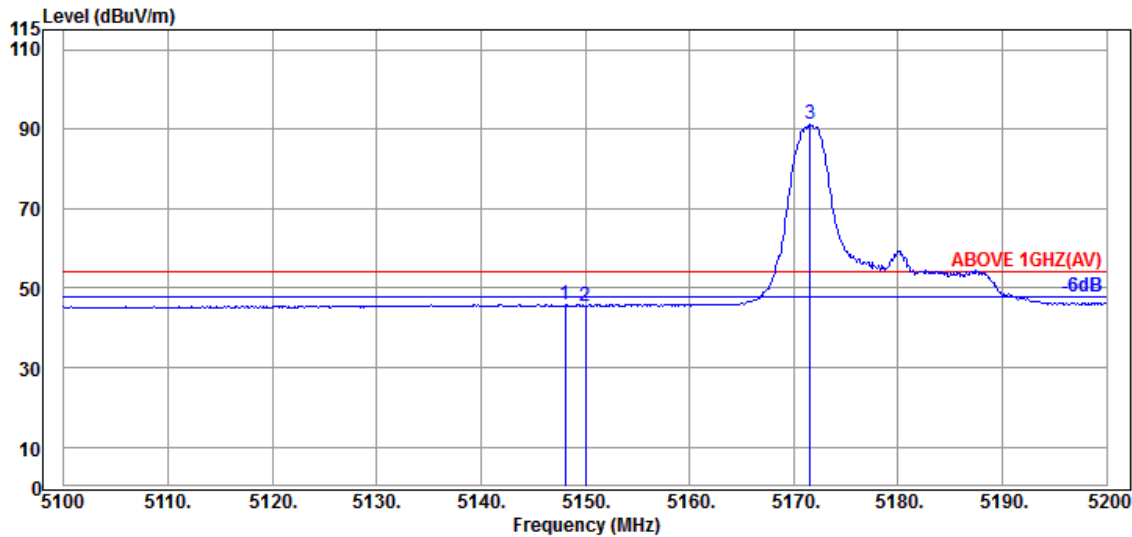


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.100 | 34.50 | 8.88 | 34.34 | 36.79 | 45.83 | 54.00 | 8.17 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.50 | 45.54 | 54.00 | 8.46 | Average |
| @ 5171.600 | 34.63 | 8.90 | 34.33 | 82.06 | 91.26 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 26/0 | Frequency | TX 5180MHz |

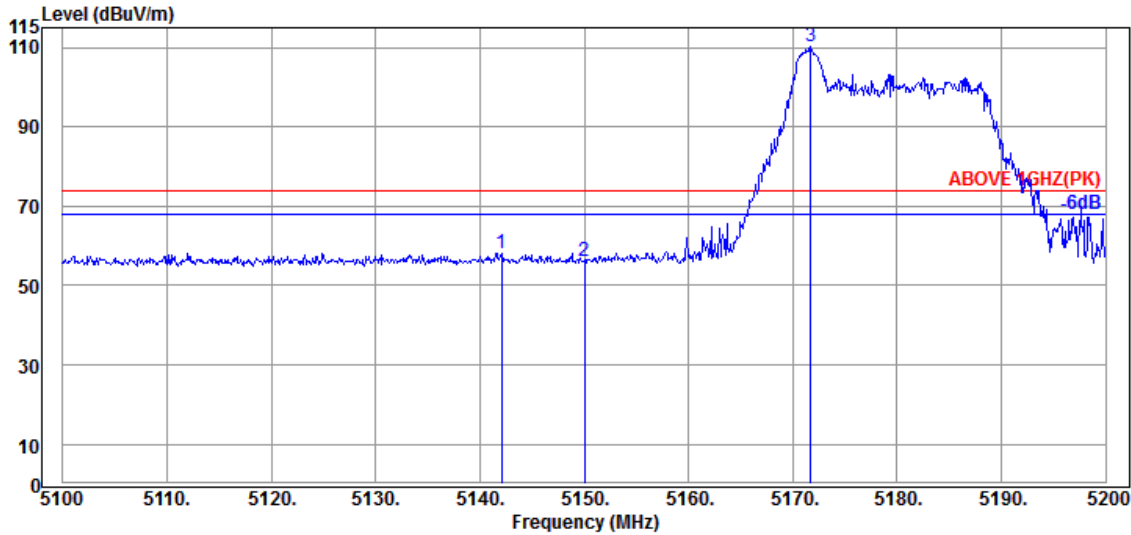

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5142.100 | 34.50 | 8.88 | 34.34 | 49.21 | 58.25 | 74.00 | 15.75 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 47.11 | 56.15 | 74.00 | 17.85 | Peak |
| @ 5171.700 | 34.63 | 8.90 | 34.33 | 100.89 | 110.09 | --- | --- | Peak |

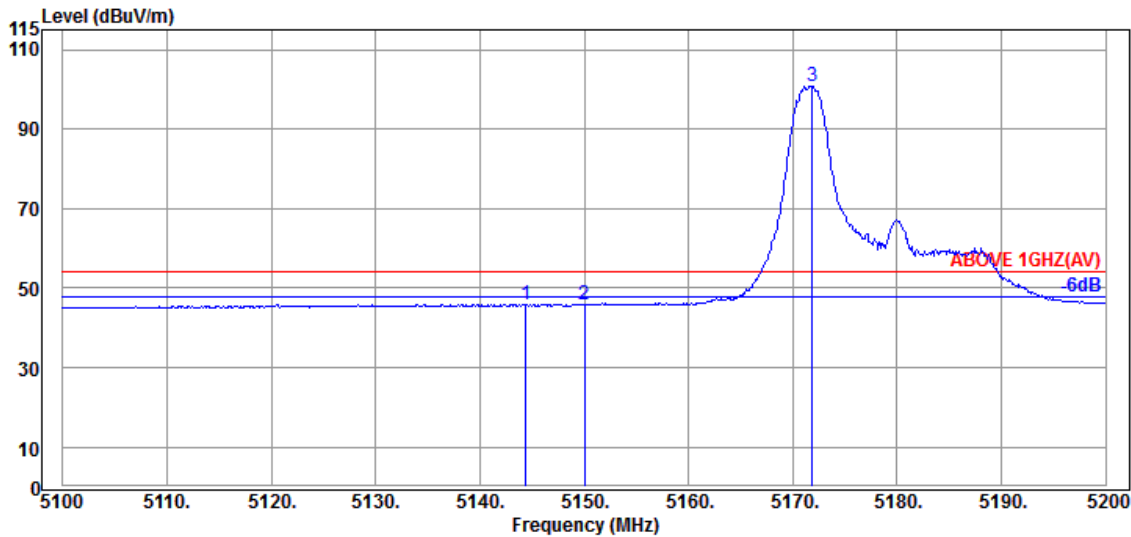


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5144.400 | 34.50 | 8.88 | 34.34 | 36.89 | 45.93 | 54.00 | 8.07 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.65 | 45.69 | 54.00 | 8.31 | Average |
| @ 5171.900 | 34.63 | 8.90 | 34.33 | 91.69 | 100.89 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 52/37 | Frequency | TX 5180MHz |

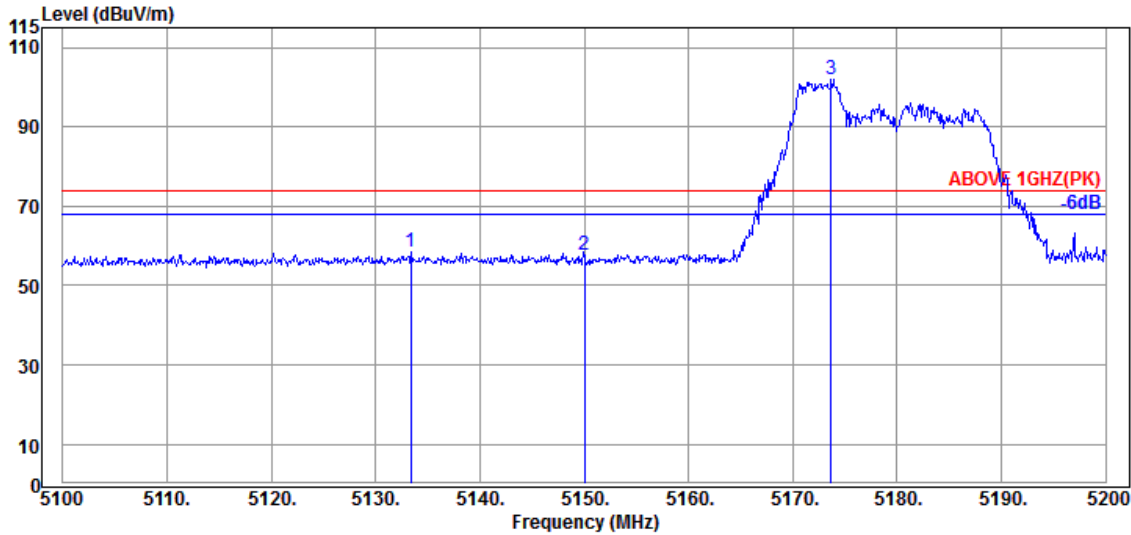

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5133.400 | 34.40 | 8.88 | 34.34 | 49.55 | 58.49 | 74.00 | 15.51 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 48.66 | 57.70 | 74.00 | 16.30 | Peak |
| @ 5173.700 | 34.63 | 8.90 | 34.32 | 92.67 | 101.88 | --- | --- | Peak |

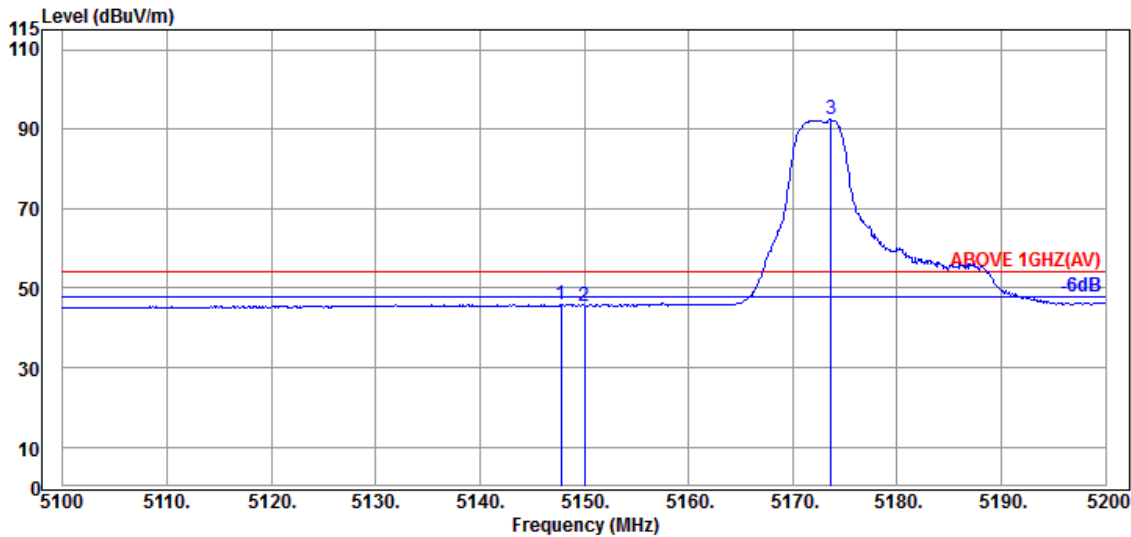


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.800 | 34.50 | 8.88 | 34.34 | 36.88 | 45.92 | 54.00 | 8.08 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.49 | 45.53 | 54.00 | 8.47 | Average |
| @ 5173.700 | 34.63 | 8.90 | 34.32 | 83.27 | 92.48 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 52/37 | Frequency | TX 5180MHz |

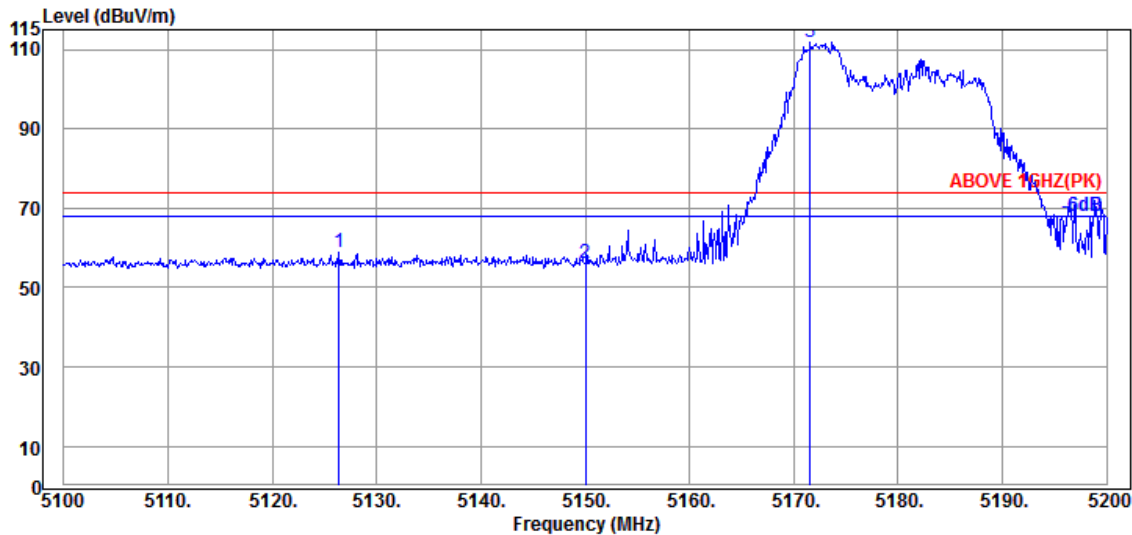

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5126.400 | 34.30 | 8.87 | 34.34 | 50.01 | 58.84 | 74.00 | 15.16 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 47.23 | 56.27 | 74.00 | 17.73 | Peak |
| @ 5171.600 | 34.63 | 8.90 | 34.33 | 102.78 | 111.98 | --- | --- | Peak |

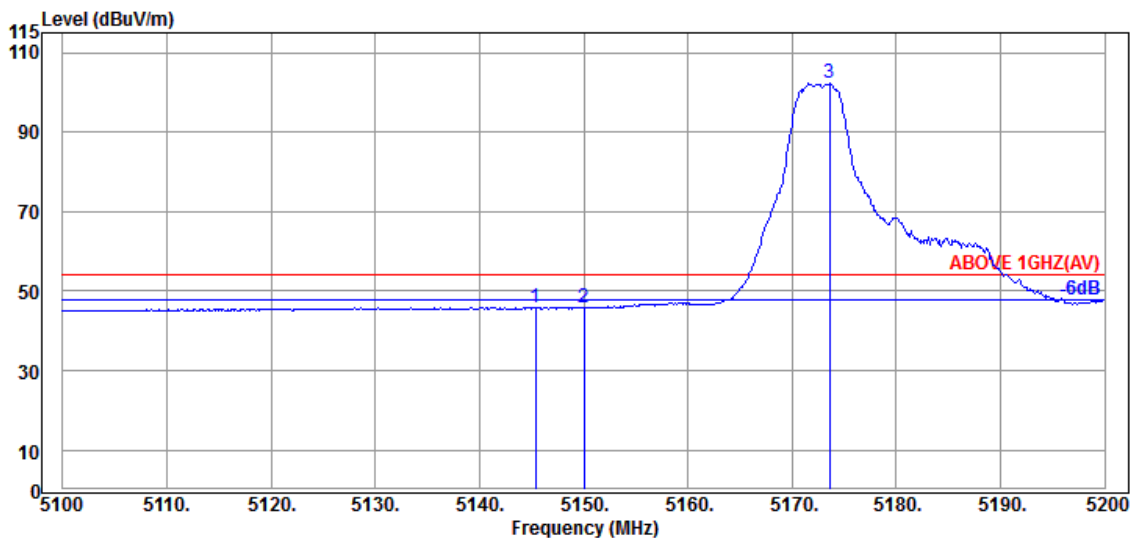


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.400 | 34.50 | 8.88 | 34.34 | 36.94 | 45.98 | 54.00 | 8.02 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.67 | 45.71 | 54.00 | 8.29 | Average |
| @ 5173.600 | 34.63 | 8.90 | 34.32 | 93.05 | 102.26 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 106/53 | Frequency | TX 5180MHz |

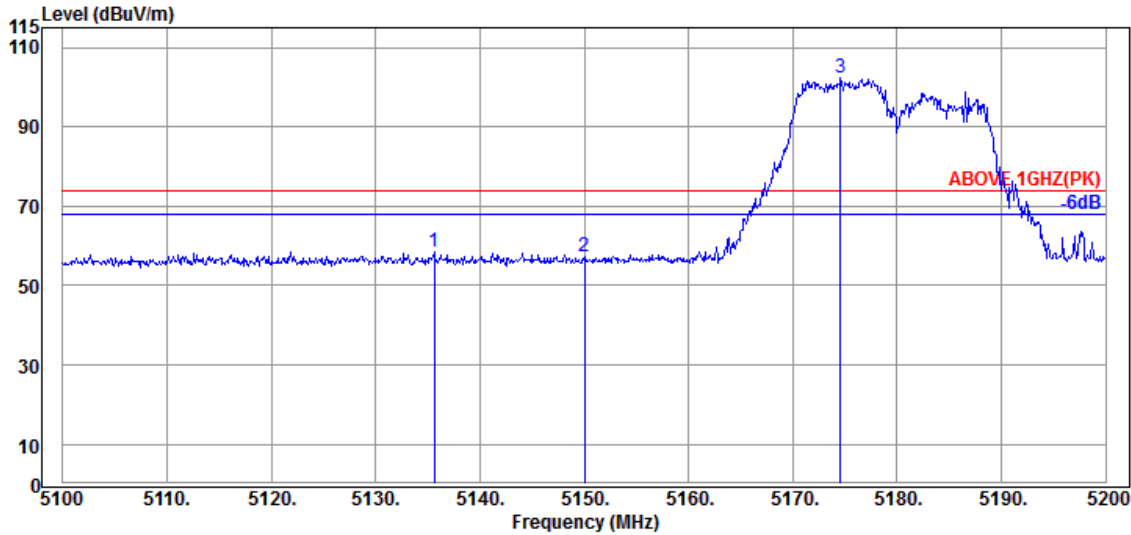

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5135.600 | 34.40 | 8.88 | 34.34 | 49.64 | 58.58 | 74.00 | 15.42 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 48.40 | 57.44 | 74.00 | 16.56 | Peak |
| @ 5174.600 | 34.63 | 8.90 | 34.32 | 93.30 | 102.51 | --- | --- | Peak |

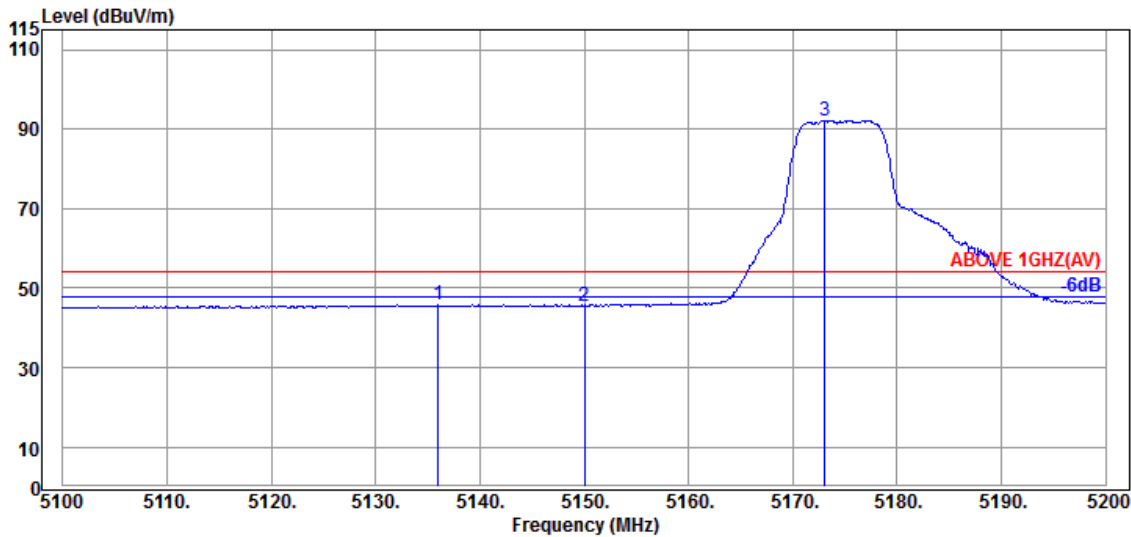


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5136.000 | 34.40 | 8.88 | 34.34 | 36.83 | 45.77 | 54.00 | 8.23 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 36.45 | 45.49 | 54.00 | 8.51 | Average |
| @ 5173.100 | 34.63 | 8.90 | 34.33 | 83.03 | 92.23 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| RU Configuration | 106/53 | Frequency | TX 5180MHz |

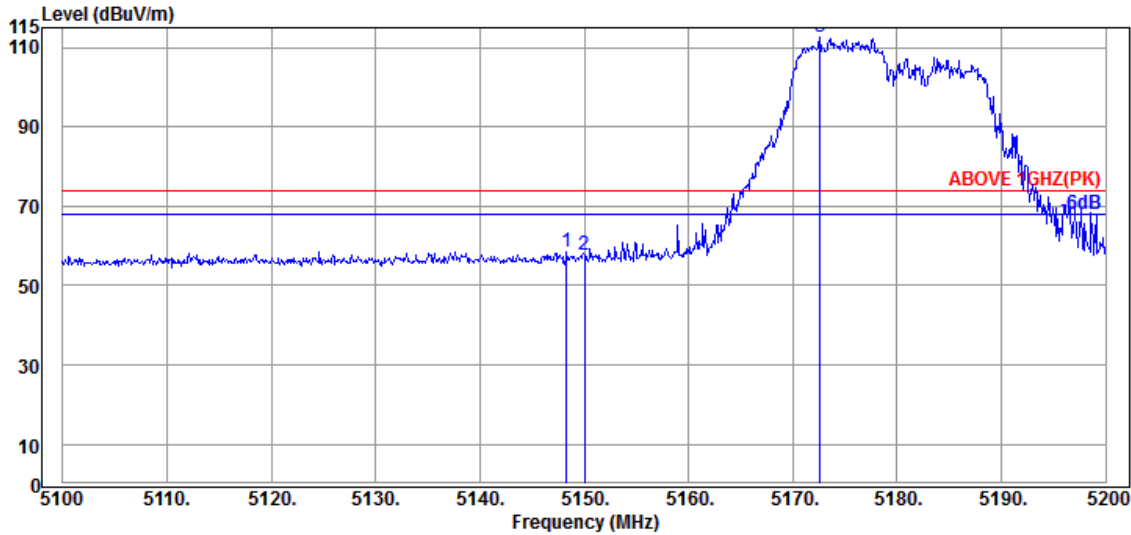

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.300 | 34.50 | 8.88 | 34.34 | 49.39 | 58.43 | 74.00 | 15.57 | Peak |
| 5150.000 | 34.50 | 8.88 | 34.34 | 48.49 | 57.53 | 74.00 | 16.47 | Peak |
| @ 5172.600 | 34.63 | 8.90 | 34.33 | 103.34 | 112.54 | --- | --- | Peak |

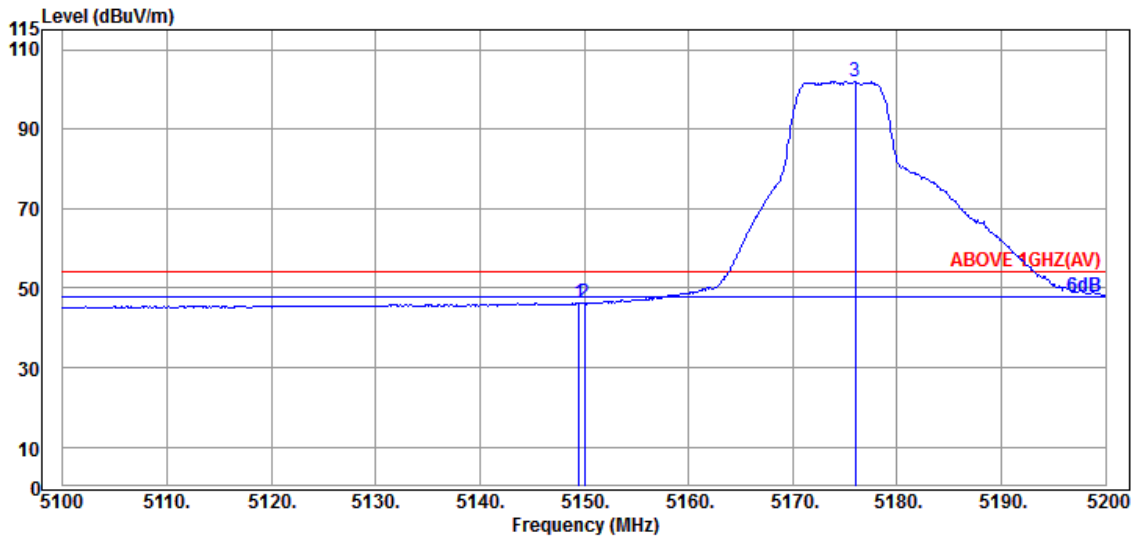

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.500 | 34.50 | 8.88 | 34.34 | 37.09 | 46.13 | 54.00 | 7.87 | Average |
| 5150.000 | 34.50 | 8.88 | 34.34 | 37.07 | 46.11 | 54.00 | 7.89 | Average |
| @ 5176.000 | 34.63 | 8.90 | 34.32 | 92.71 | 101.92 | --- | --- | Average |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 26/8 | Frequency | TX 5320MHz |

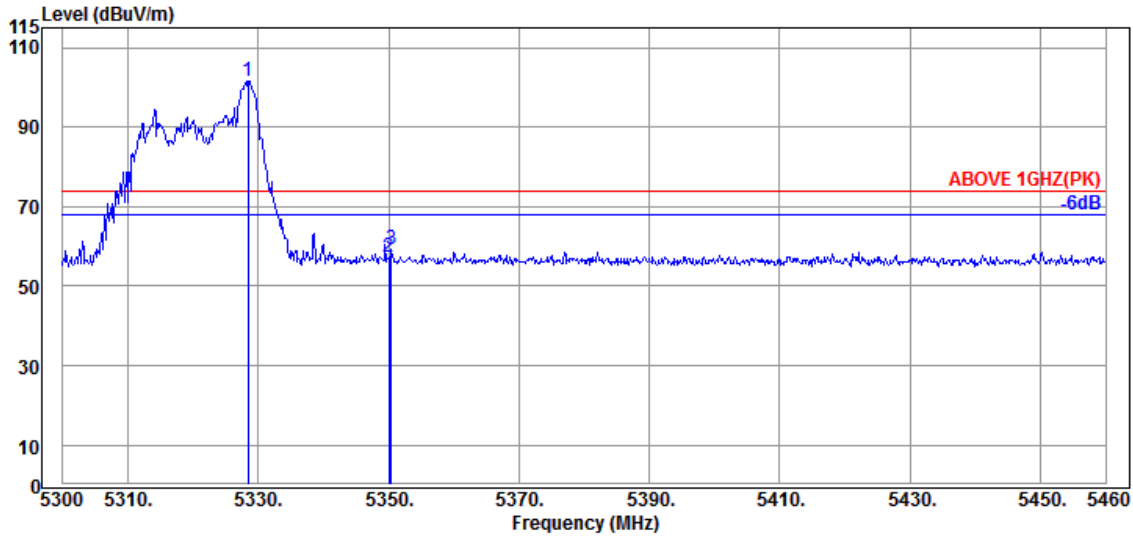

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.480 | 34.73 | 8.99 | 34.26 | 92.16 | 101.62 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 47.50 | 57.13 | 74.00 | 16.87 | Peak |
| 5350.400 | 34.90 | 8.99 | 34.26 | 49.61 | 59.24 | 74.00 | 14.76 | Peak |

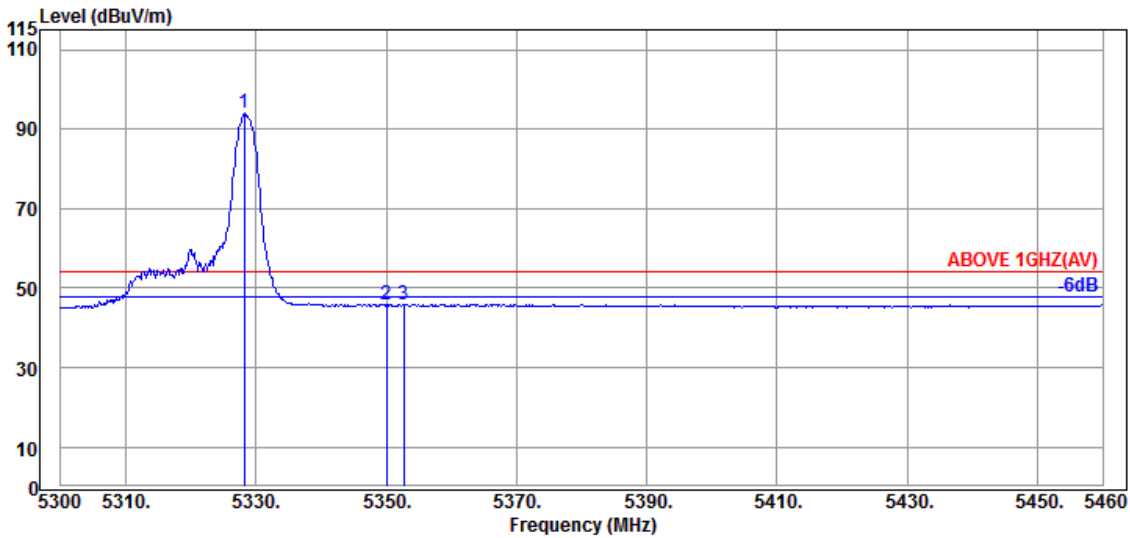


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160 | 34.73 | 8.99 | 34.26 | 84.61 | 94.07 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.07 | 45.70 | 54.00 | 8.30 | Average |
| 5352.640 | 34.90 | 8.99 | 34.26 | 36.40 | 46.03 | 54.00 | 7.97 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 26/8 | Frequency | TX 5320MHz |

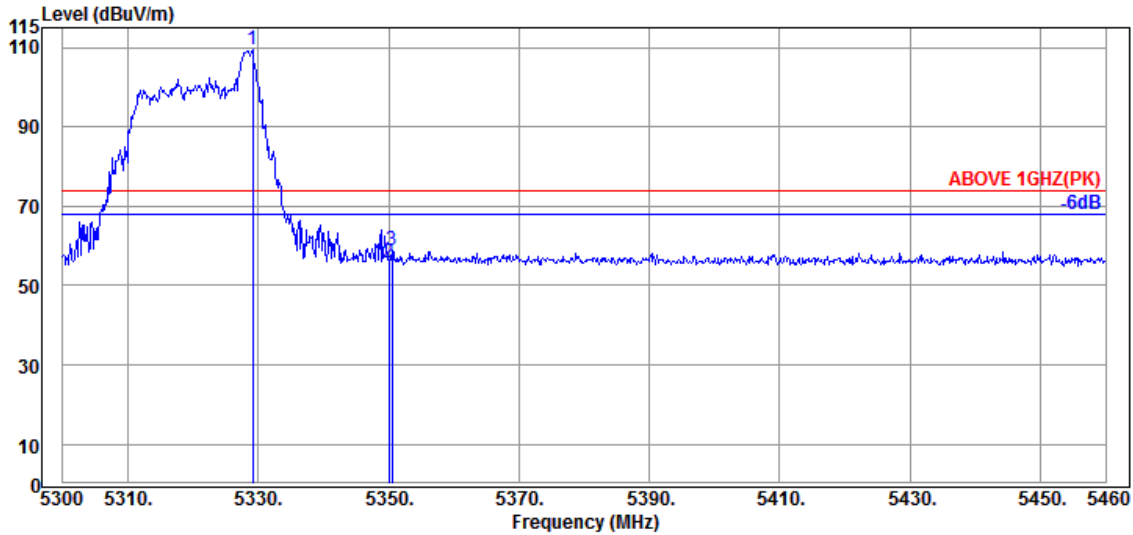

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5329.120 | 34.73 | 8.99 | 34.26 | 100.20 | 109.66 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 46.17 | 55.80 | 74.00 | 18.20 | Peak |
| 5350.560 | 34.90 | 8.99 | 34.26 | 49.14 | 58.77 | 74.00 | 15.23 | Peak |

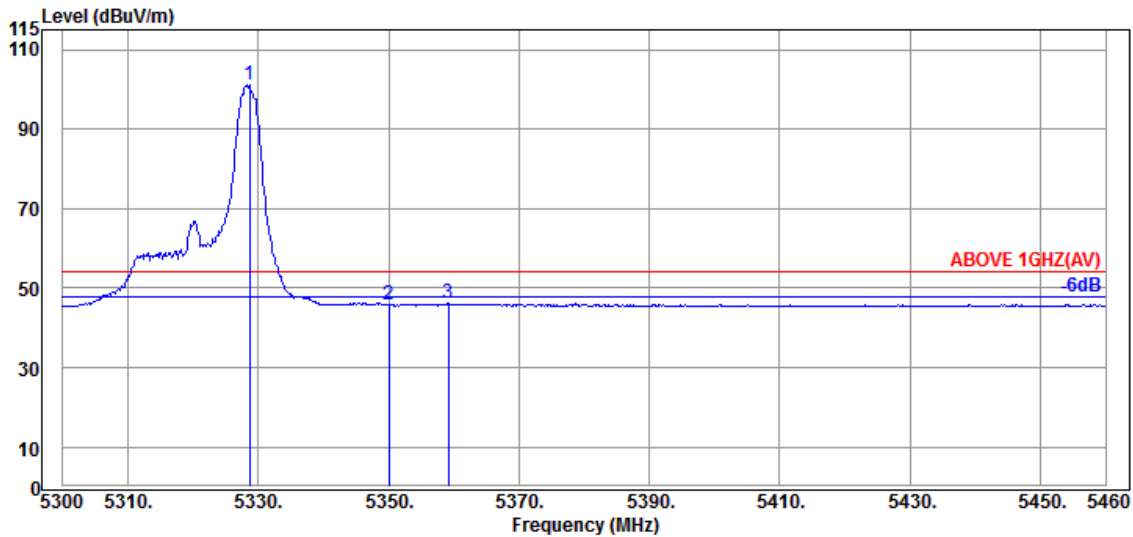


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.640 | 34.73 | 8.99 | 34.26 | 91.84 | 101.30 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.41 | 46.04 | 54.00 | 7.96 | Average |
| 5359.200 | 34.87 | 9.00 | 34.26 | 36.58 | 46.19 | 54.00 | 7.81 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 52/40 | Frequency | TX 5320MHz |

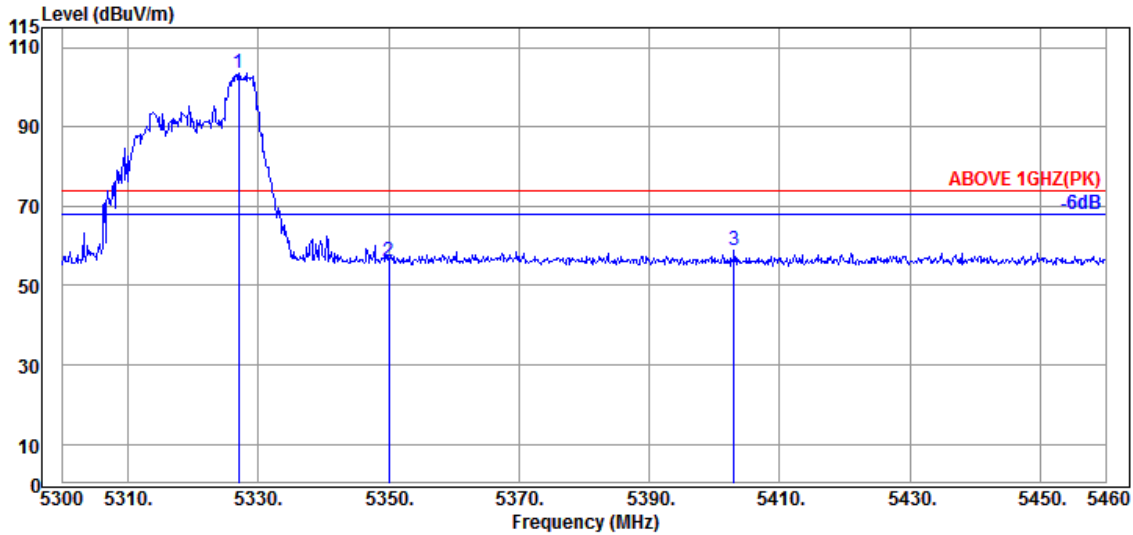

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.040 | 34.73 | 8.99 | 34.27 | 94.09 | 103.54 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 46.46 | 56.09 | 74.00 | 17.91 | Peak |
| 5403.040 | 34.75 | 9.03 | 34.23 | 49.38 | 58.93 | 74.00 | 15.07 | Peak |

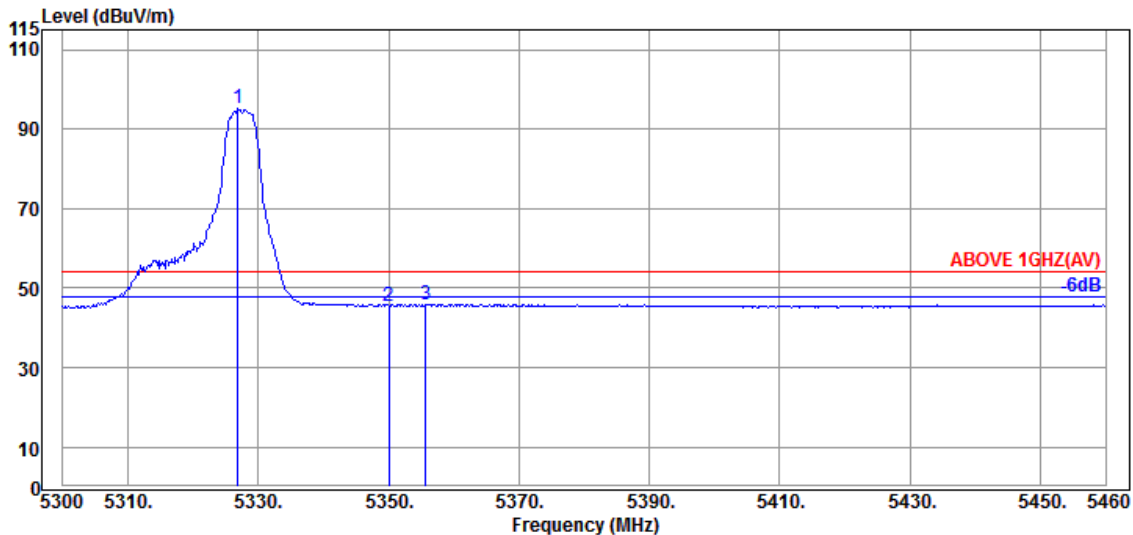


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5326.880 | 34.73 | 8.99 | 34.27 | 85.62 | 95.07 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 35.94 | 45.57 | 54.00 | 8.43 | Average |
| 5355.680 | 34.87 | 9.00 | 34.26 | 36.37 | 45.98 | 54.00 | 8.02 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 52/40 | Frequency | TX 5320MHz |

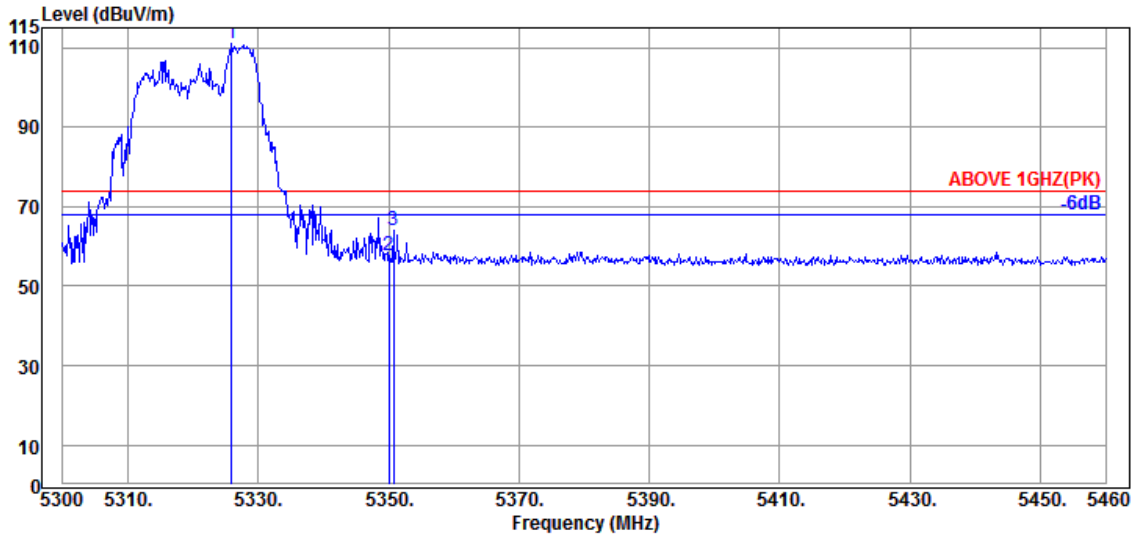

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5325.920 | 34.73 | 8.99 | 34.27 | 101.46 | 110.91 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 48.00 | 57.63 | 74.00 | 16.37 | Peak |
| 5350.720 | 34.90 | 8.99 | 34.26 | 54.42 | 64.05 | 74.00 | 9.95 | Peak |

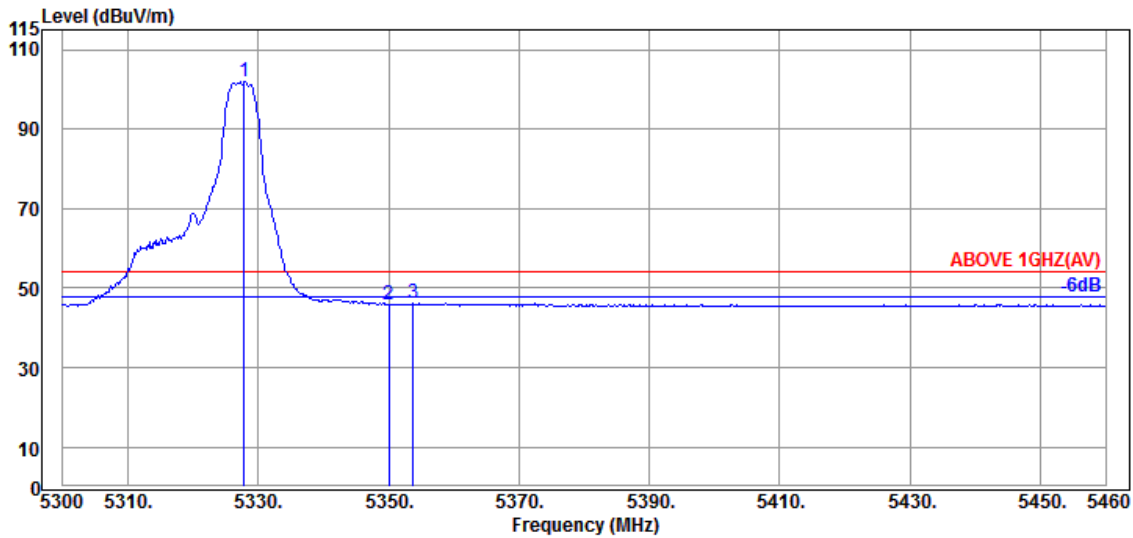


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5327.840 | 34.73 | 8.99 | 34.27 | 92.62 | 102.07 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.12 | 45.75 | 54.00 | 8.25 | Average |
| 5353.760 | 34.90 | 8.99 | 34.26 | 36.51 | 46.14 | 54.00 | 7.86 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 106/54 | Frequency | TX 5320MHz |

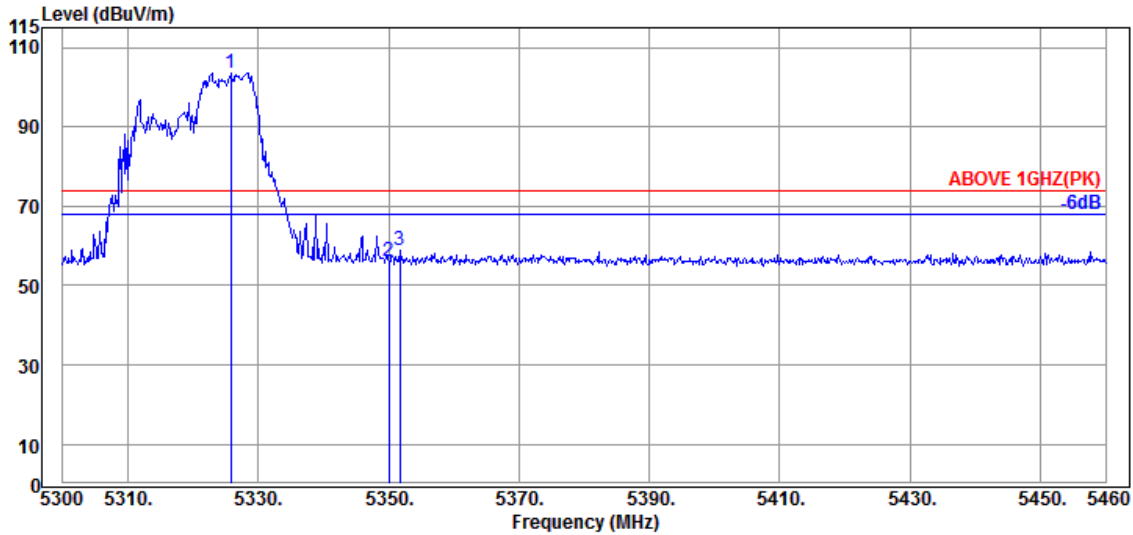

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5325.760 | 34.73 | 8.99 | 34.27 | 94.18 | 103.63 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 46.59 | 56.22 | 74.00 | 17.78 | Peak |
| 5351.680 | 34.90 | 8.99 | 34.26 | 49.27 | 58.90 | 74.00 | 15.10 | Peak |

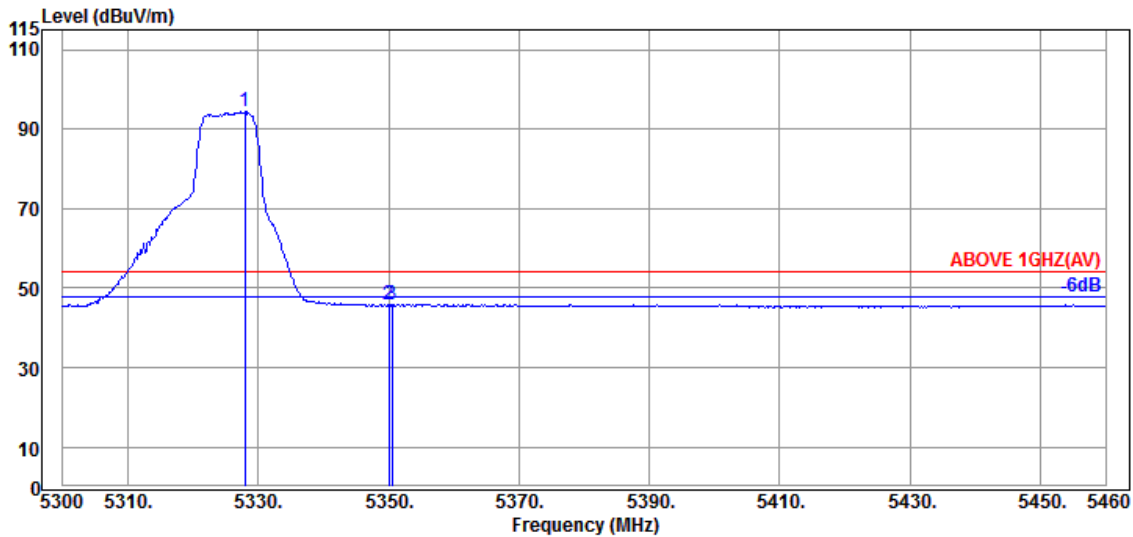


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.000 | 34.73 | 8.99 | 34.27 | 85.04 | 94.49 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.13 | 45.76 | 54.00 | 8.24 | Average |
| 5350.560 | 34.90 | 8.99 | 34.26 | 36.24 | 45.87 | 54.00 | 8.13 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| RU Configuration | 106/54 | Frequency | TX 5320MHz |

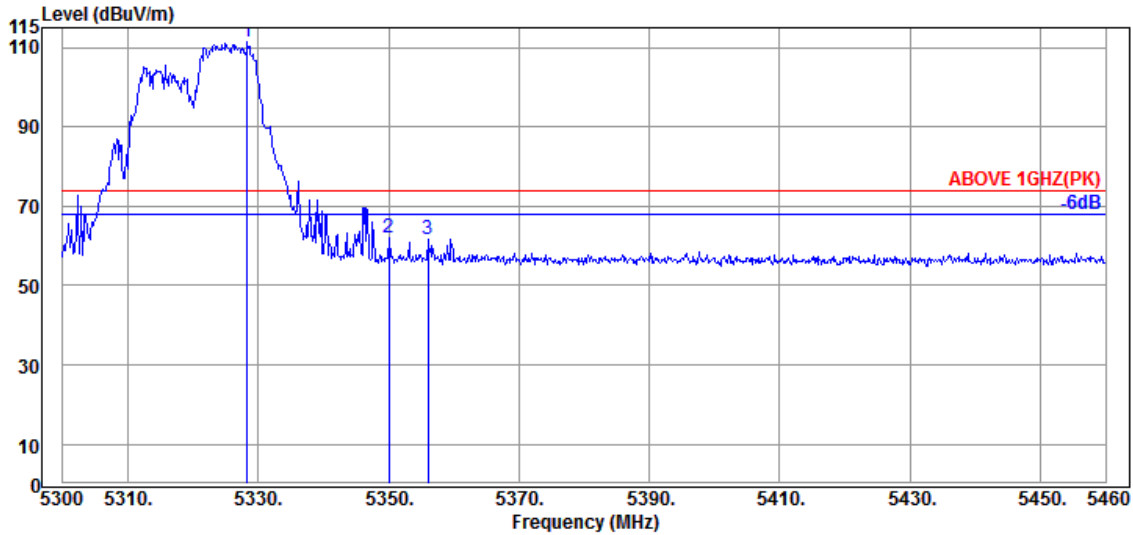

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.320 | 34.73 | 8.99 | 34.26 | 101.92 | 111.38 | --- | --- | Peak |
| 5350.080 | 34.90 | 8.99 | 34.26 | 52.34 | 61.97 | 74.00 | 12.03 | Peak |
| 5356.000 | 34.87 | 9.00 | 34.26 | 51.91 | 61.52 | 74.00 | 12.48 | Peak |

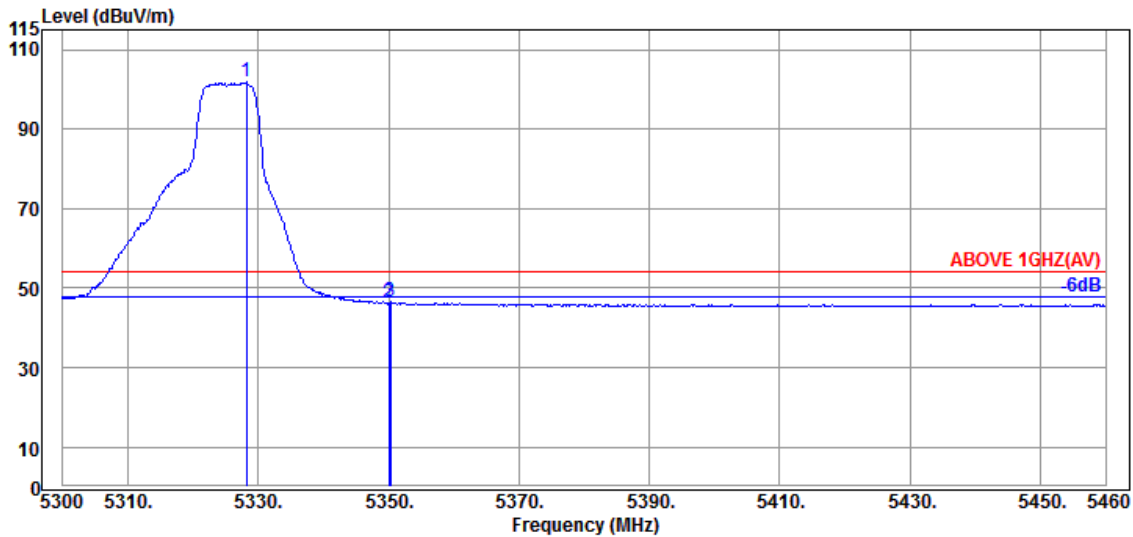


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5328.160 | 34.73 | 8.99 | 34.26 | 92.31 | 101.77 | --- | --- | Average |
| 5350.080 | 34.90 | 8.99 | 34.26 | 36.76 | 46.39 | 54.00 | 7.61 | Average |
| 5350.240 | 34.90 | 8.99 | 34.26 | 36.82 | 46.45 | 54.00 | 7.55 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/0 | Frequency | TX 5500MHz |

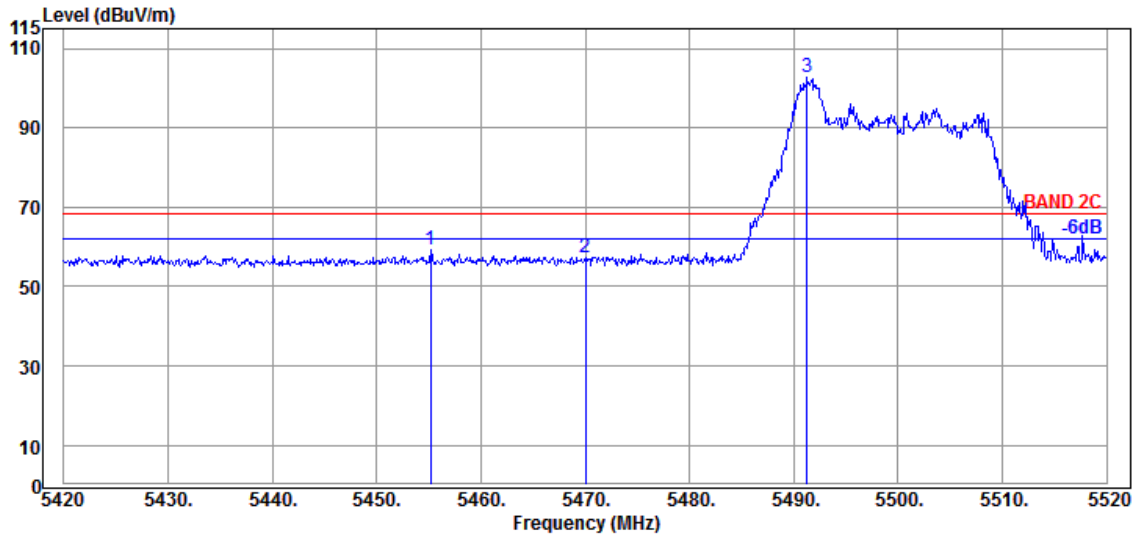

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5455.200 | 34.60 | 9.05 | 34.21 | 49.73 | 59.17 | 68.20 | 9.03 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 47.82 | 57.30 | 68.20 | 10.90 | Peak |
| @ 5491.300 | 34.67 | 9.07 | 34.20 | 93.33 | 102.87 | --- | --- | Peak |

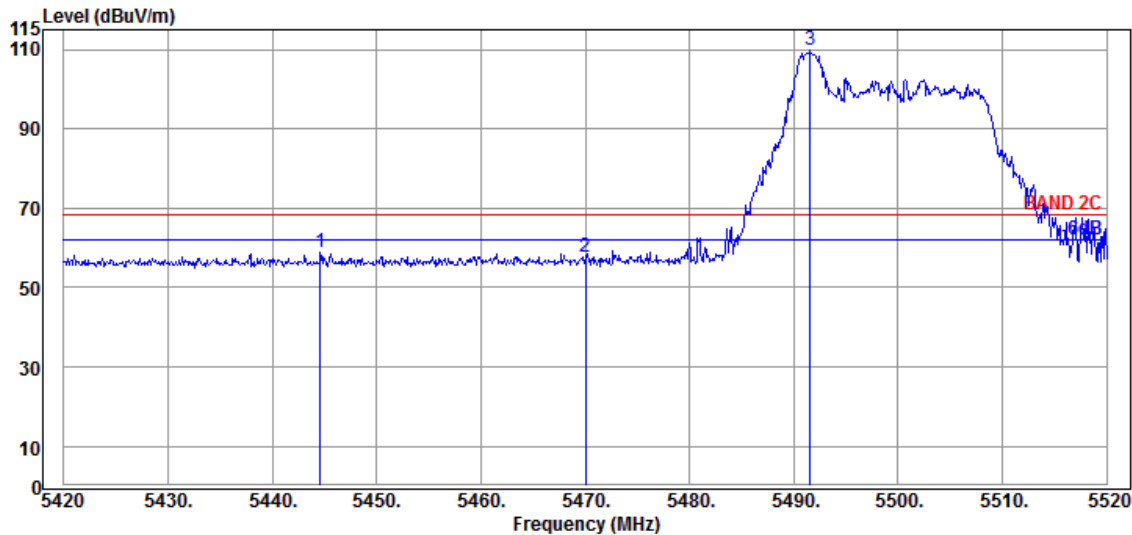


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5444.600 | 34.65 | 9.04 | 34.22 | 49.27 | 58.74 | 68.20 | 9.46 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 48.26 | 57.74 | 68.20 | 10.46 | Peak |
| @ 5491.600 | 34.67 | 9.07 | 34.20 | 100.26 | 109.80 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/0 | Frequency | TX 5500MHz |

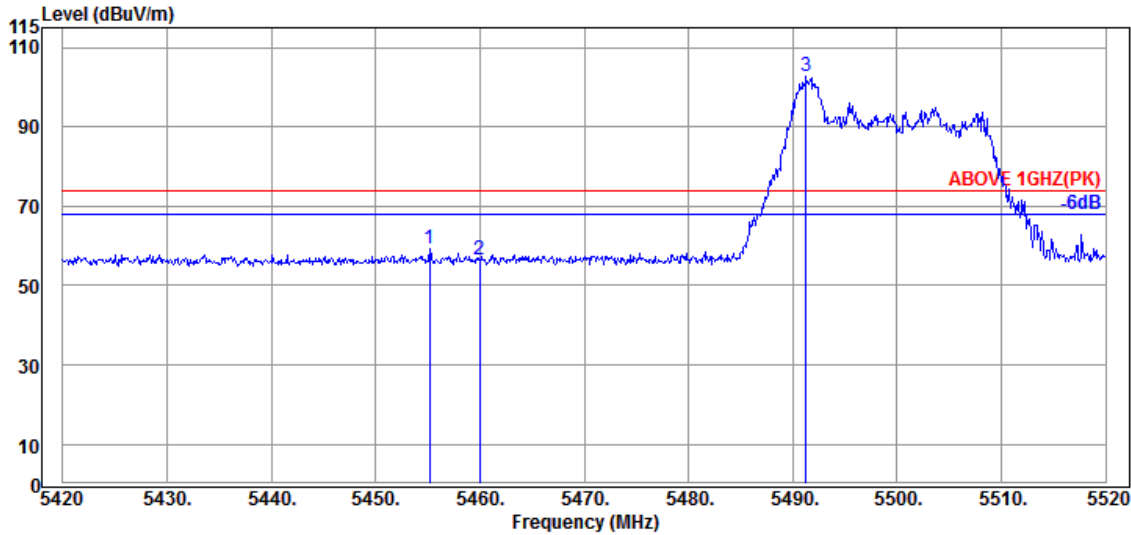

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5455.200 | 34.60 | 9.05 | 34.21 | 49.73 | 59.17 | 74.00 | 14.83 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 46.92 | 56.36 | 74.00 | 17.64 | Peak |
| @ 5491.300 | 34.67 | 9.07 | 34.20 | 93.33 | 102.87 | --- | --- | Peak |

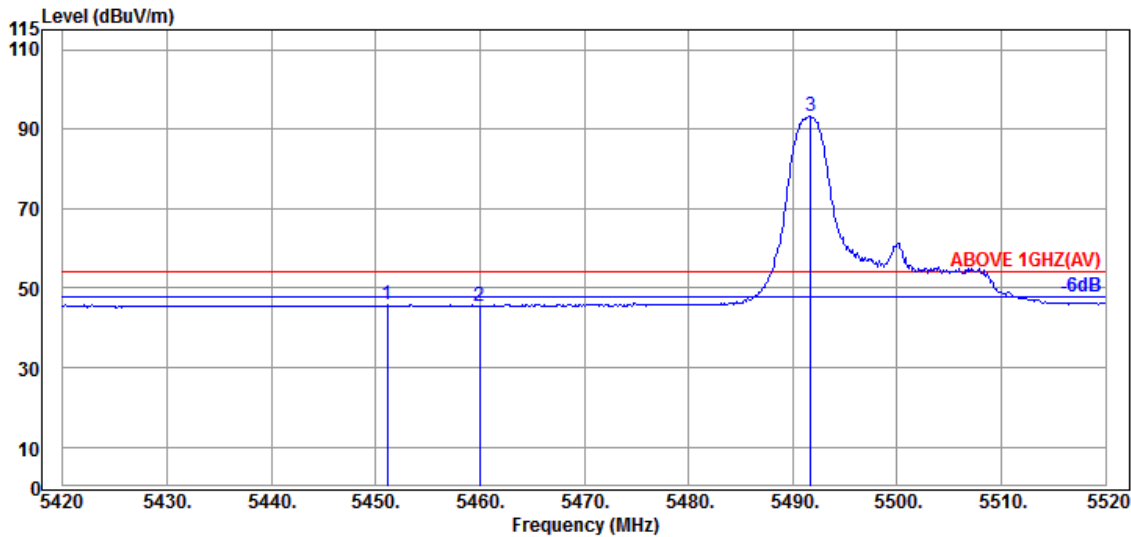


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5451.100 | 34.60 | 9.05 | 34.22 | 36.32 | 45.75 | 54.00 | 8.25 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.08 | 45.52 | 54.00 | 8.48 | Average |
| @ 5491.700 | 34.67 | 9.07 | 34.20 | 83.75 | 93.29 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/0 | Frequency | TX 5500MHz |

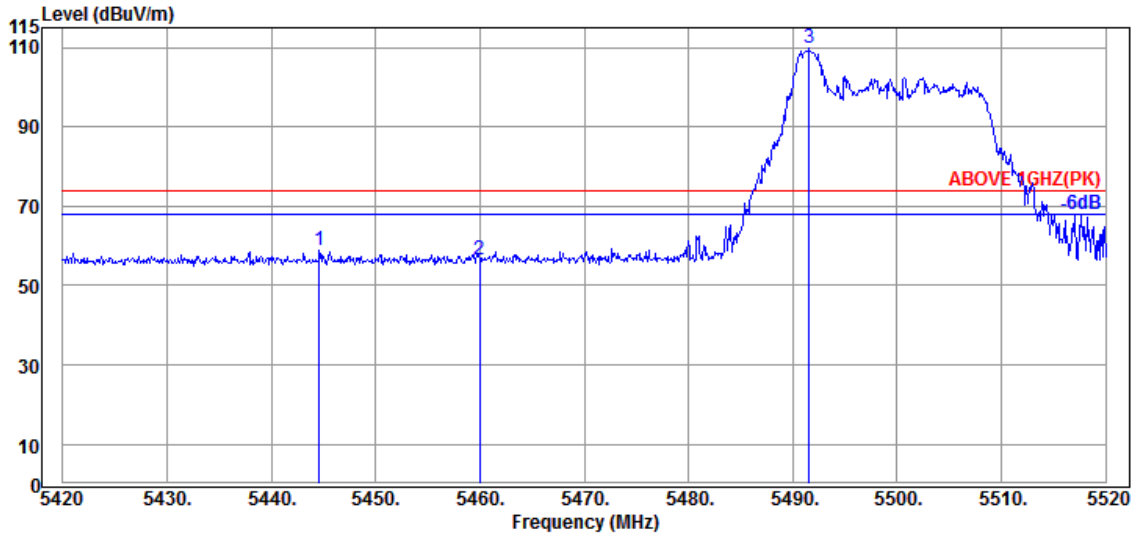

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5444.600 | 34.65 | 9.04 | 34.22 | 49.27 | 58.74 | 74.00 | 15.26 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 46.88 | 56.32 | 74.00 | 17.68 | Peak |
| @ 5491.600 | 34.67 | 9.07 | 34.20 | 100.26 | 109.80 | --- | --- | Peak |

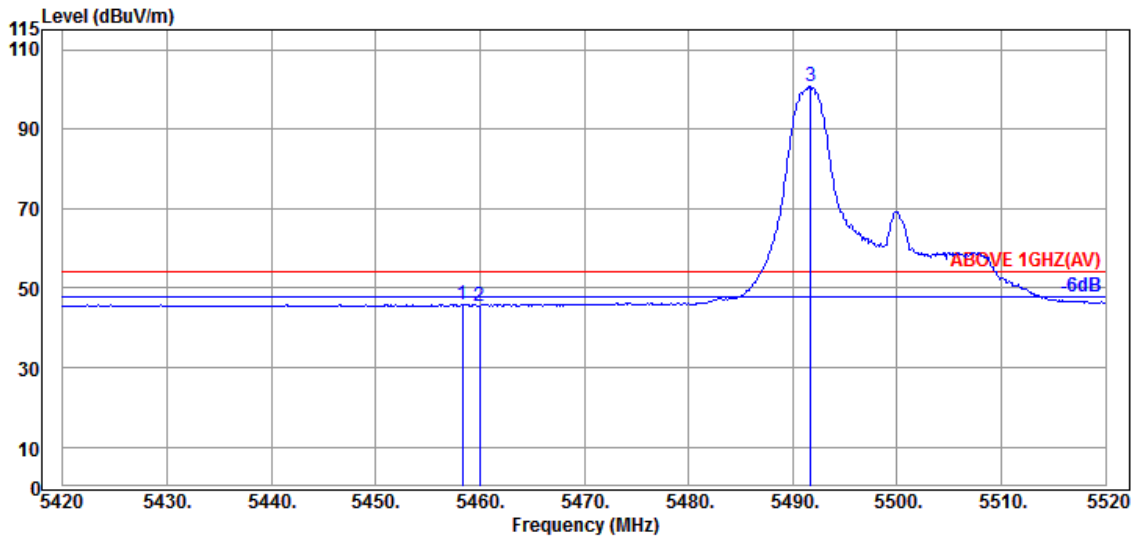


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.300 | 34.60 | 9.05 | 34.21 | 36.51 | 45.95 | 54.00 | 8.05 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.19 | 45.63 | 54.00 | 8.37 | Average |
| @ 5491.700 | 34.67 | 9.07 | 34.20 | 91.05 | 100.59 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section..

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/37 | Frequency | TX 5500MHz |

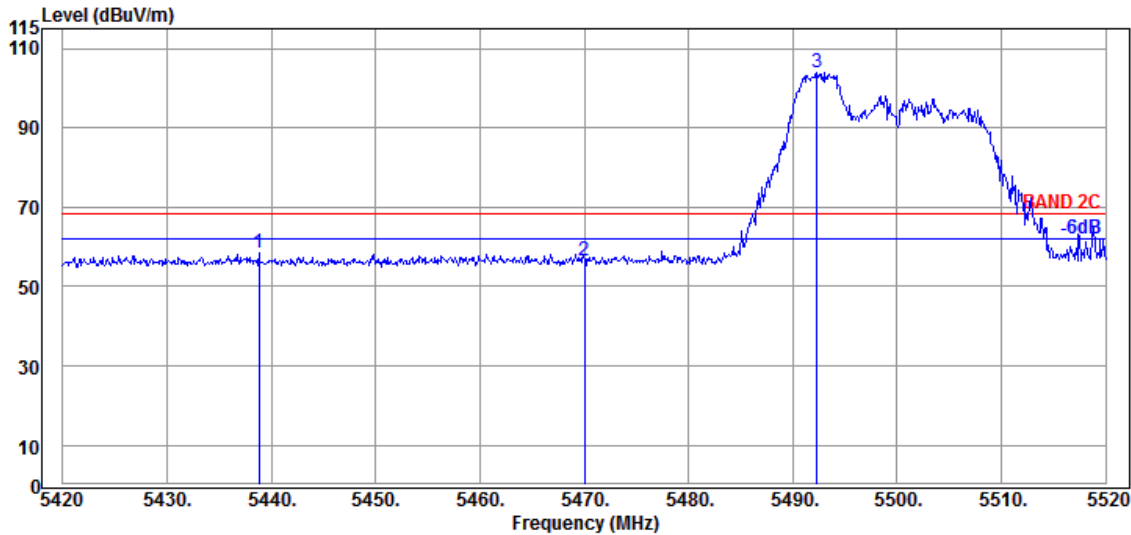

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5438.800 | 34.65 | 9.04 | 34.22 | 48.91 | 58.38 | 68.20 | 9.82 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 47.05 | 56.53 | 68.20 | 11.67 | Peak |
| @ 5492.300 | 34.67 | 9.07 | 34.20 | 94.43 | 103.97 | --- | --- | Peak |

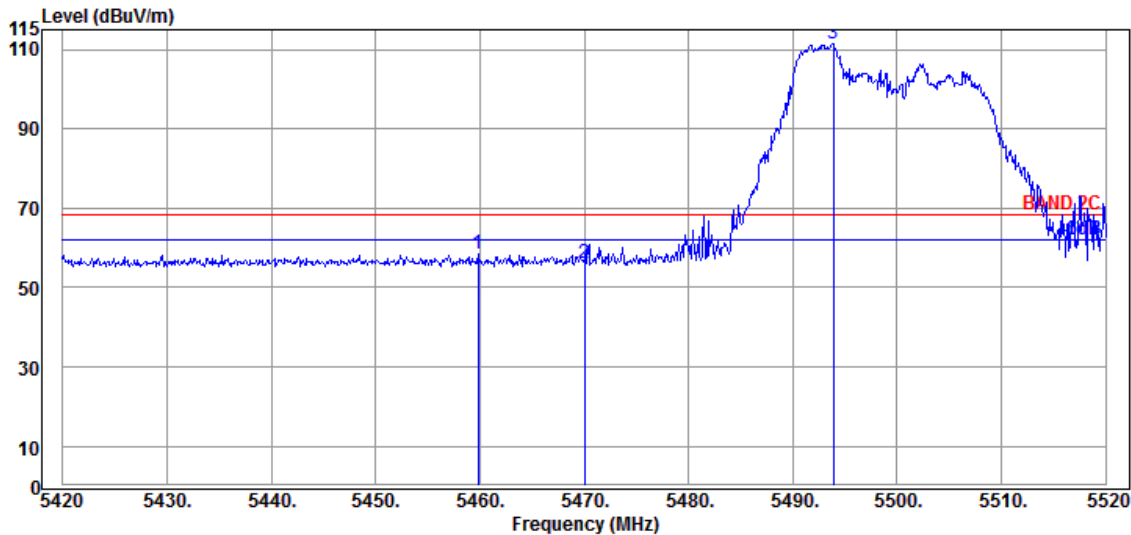


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.800 | 34.60 | 9.05 | 34.21 | 48.88 | 58.32 | 68.20 | 9.88 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 46.82 | 56.30 | 68.20 | 11.90 | Peak |
| @ 5493.900 | 34.67 | 9.07 | 34.20 | 101.89 | 111.43 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/37 | Frequency | TX 5500MHz |

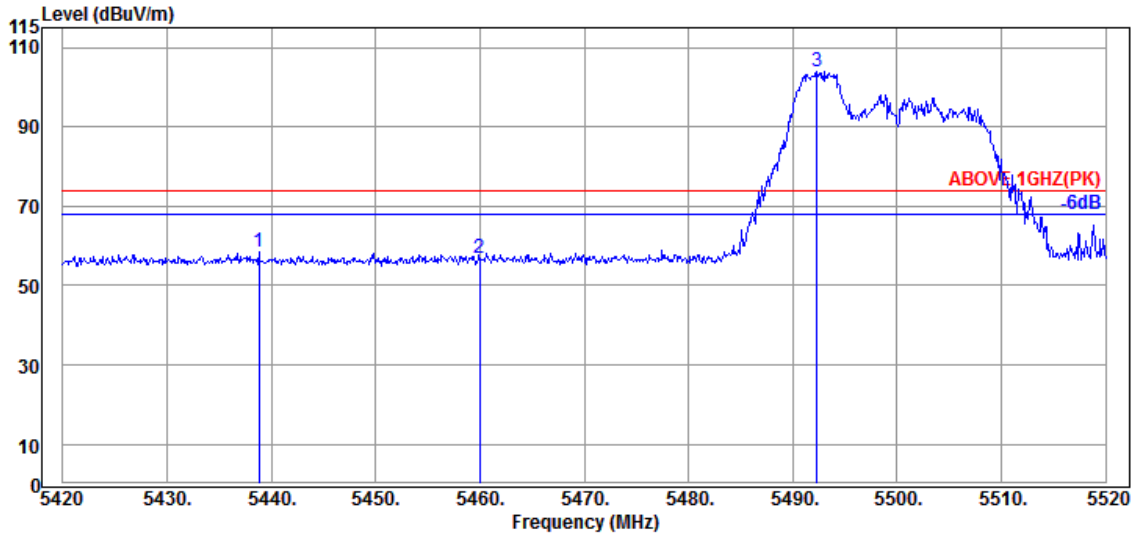

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5438.800 | 34.65 | 9.04 | 34.22 | 48.91 | 58.38 | 74.00 | 15.62 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.56 | 57.00 | 74.00 | 17.00 | Peak |
| @ 5492.300 | 34.67 | 9.07 | 34.20 | 94.43 | 103.97 | --- | --- | Peak |

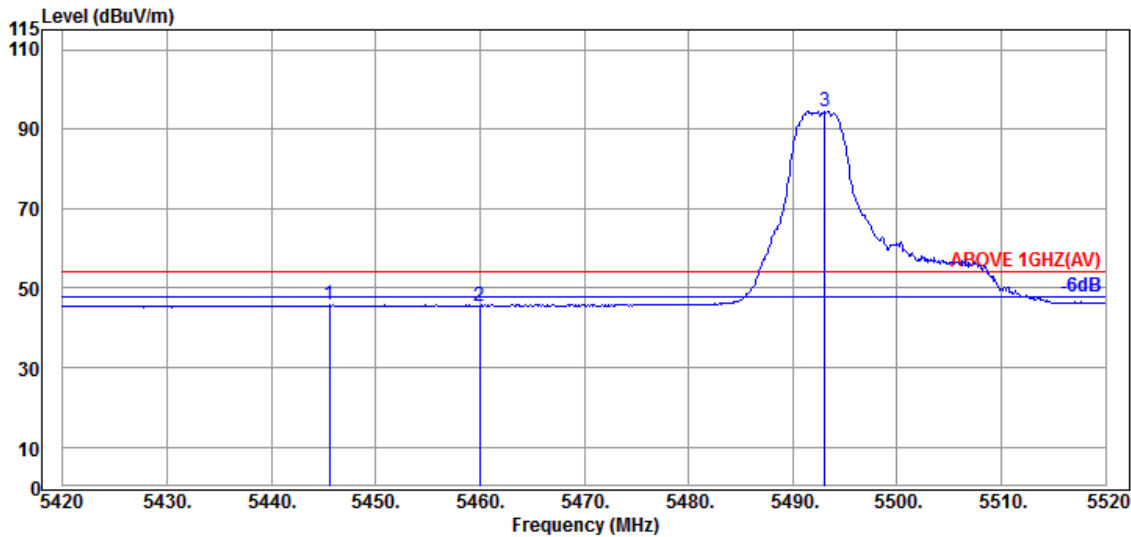


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5445.600 | 34.65 | 9.04 | 34.22 | 36.32 | 45.79 | 54.00 | 8.21 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.09 | 45.53 | 54.00 | 8.47 | Average |
| @ 5493.100 | 34.67 | 9.07 | 34.20 | 84.98 | 94.52 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/37 | Frequency | TX 5500MHz |

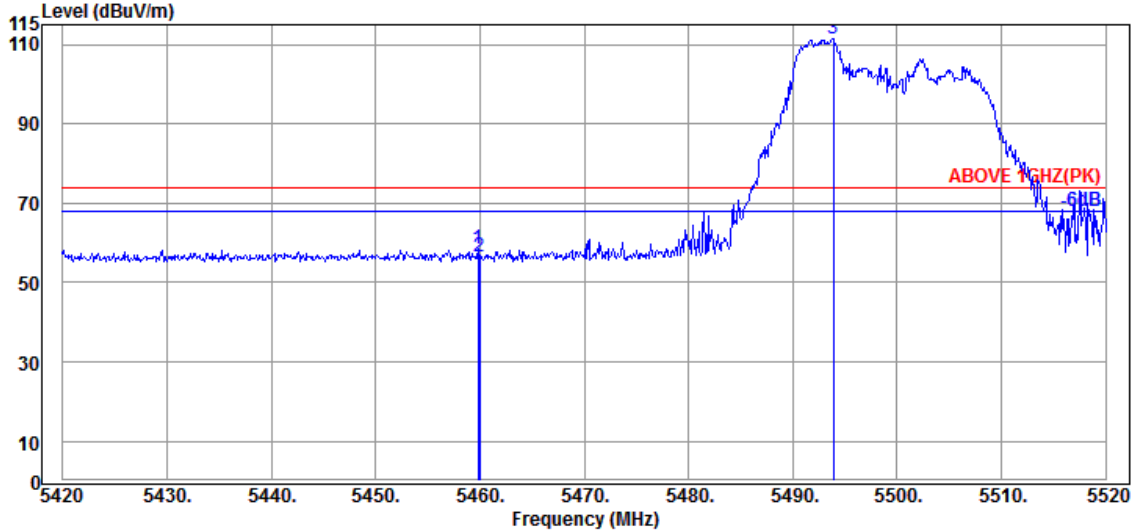

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.800 | 34.60 | 9.05 | 34.21 | 48.88 | 58.32 | 74.00 | 15.68 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 46.91 | 56.35 | 74.00 | 17.65 | Peak |
| @ 5493.900 | 34.67 | 9.07 | 34.20 | 101.89 | 111.43 | --- | --- | Peak |

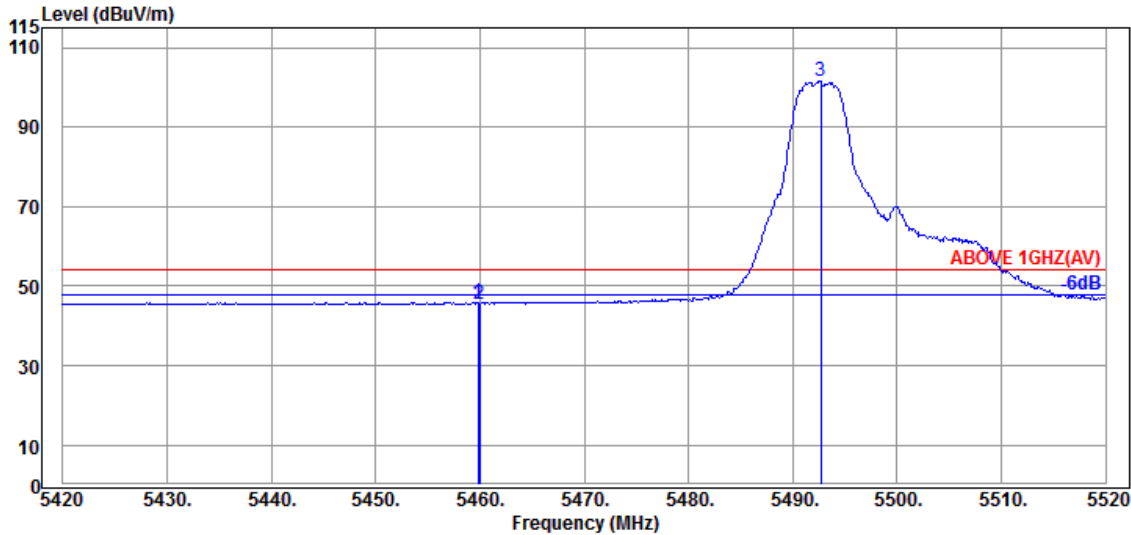


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.800 | 34.60 | 9.05 | 34.21 | 36.49 | 45.93 | 54.00 | 8.07 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.12 | 45.56 | 54.00 | 8.44 | Average |
| @ 5492.700 | 34.67 | 9.07 | 34.20 | 91.91 | 101.45 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/53 | Frequency | TX 5500MHz |

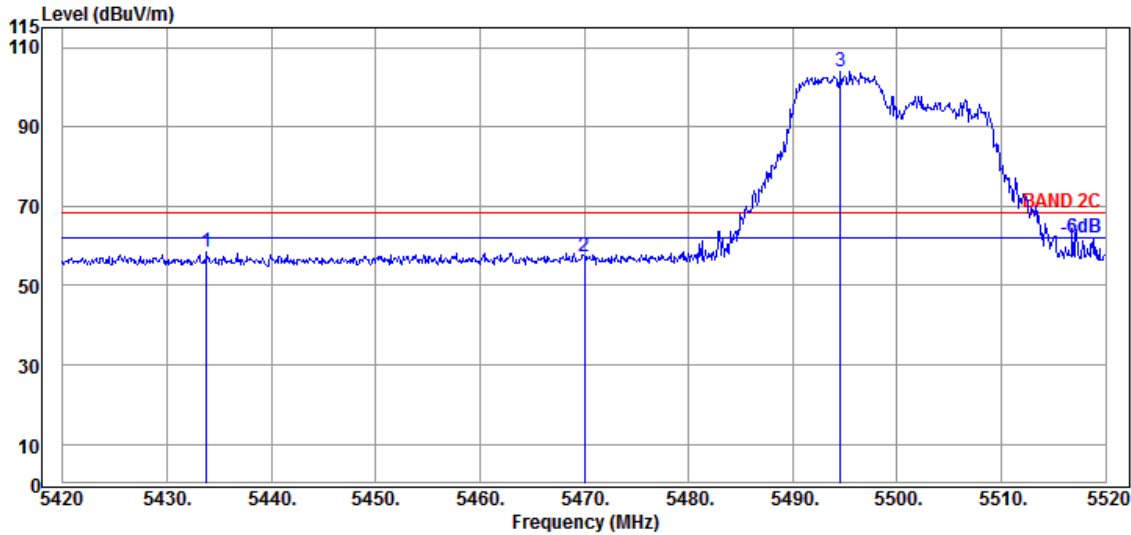

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5433.800 | 34.65 | 9.04 | 34.23 | 49.00 | 58.46 | 68.20 | 9.74 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 47.64 | 57.12 | 68.20 | 11.08 | Peak |
| @ 5494.600 | 34.67 | 9.07 | 34.20 | 94.55 | 104.09 | --- | --- | Peak |

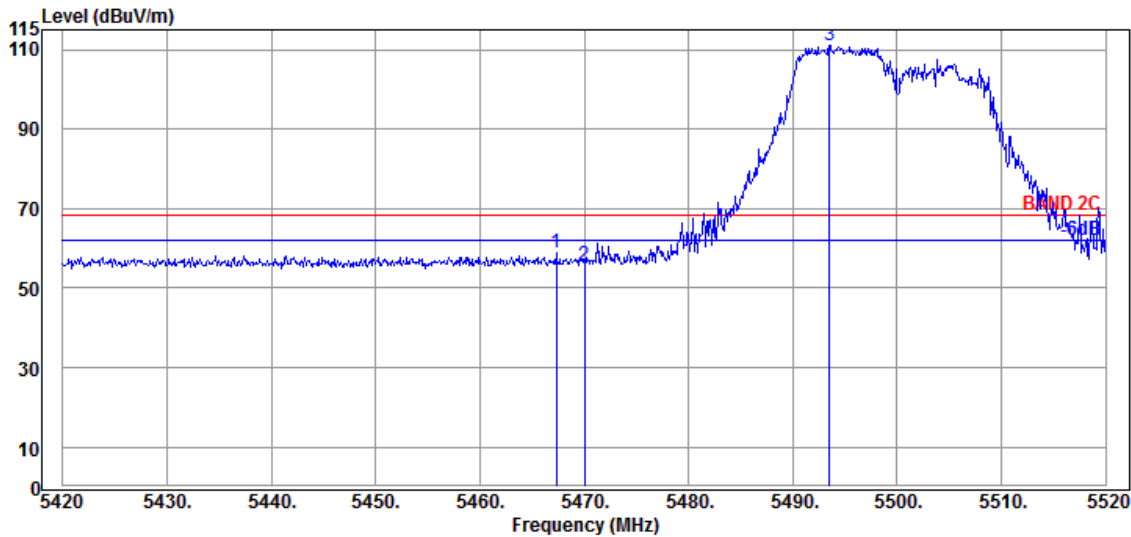


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5467.300 | 34.63 | 9.06 | 34.21 | 49.54 | 59.02 | 68.20 | 9.18 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 46.43 | 55.91 | 68.20 | 12.29 | Peak |
| @ 5493.500 | 34.67 | 9.07 | 34.20 | 101.54 | 111.08 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/53 | Frequency | TX 5500MHz |

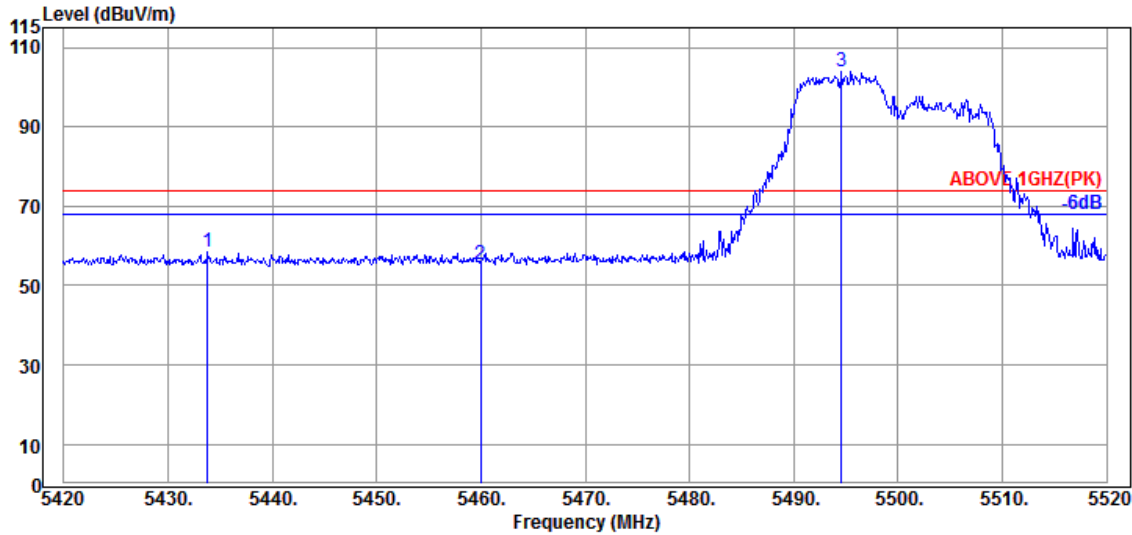

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5433.800 | 34.65 | 9.04 | 34.23 | 49.00 | 58.46 | 74.00 | 15.54 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 45.79 | 55.23 | 74.00 | 18.77 | Peak |
| @ 5494.600 | 34.67 | 9.07 | 34.20 | 94.55 | 104.09 | --- | --- | Peak |

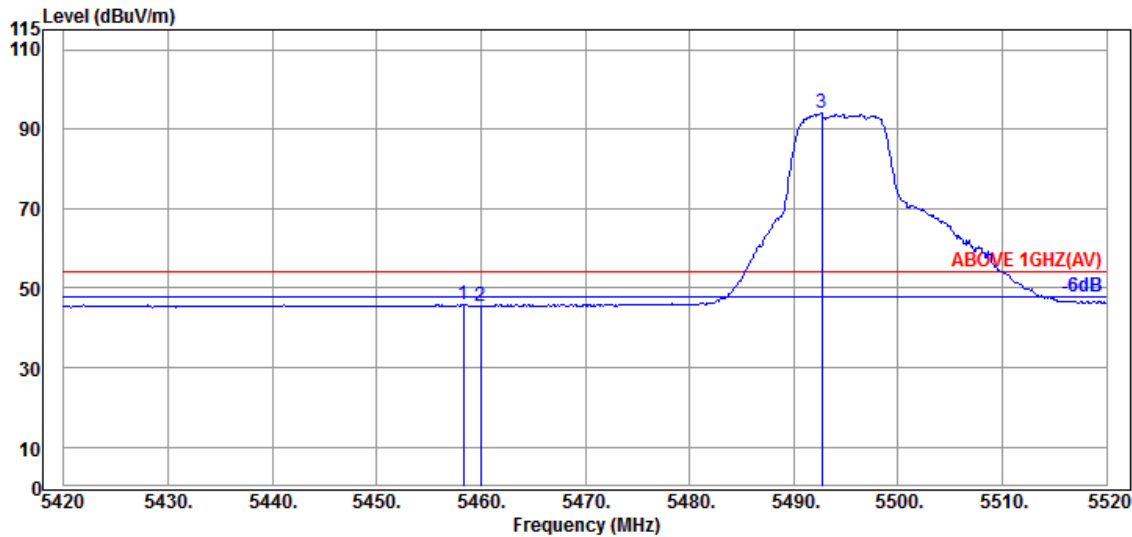


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.300 | 34.60 | 9.05 | 34.21 | 36.37 | 45.81 | 54.00 | 8.19 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.08 | 45.52 | 54.00 | 8.48 | Average |
| @ 5492.700 | 34.67 | 9.07 | 34.20 | 84.38 | 93.92 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/53 | Frequency | TX 5500MHz |

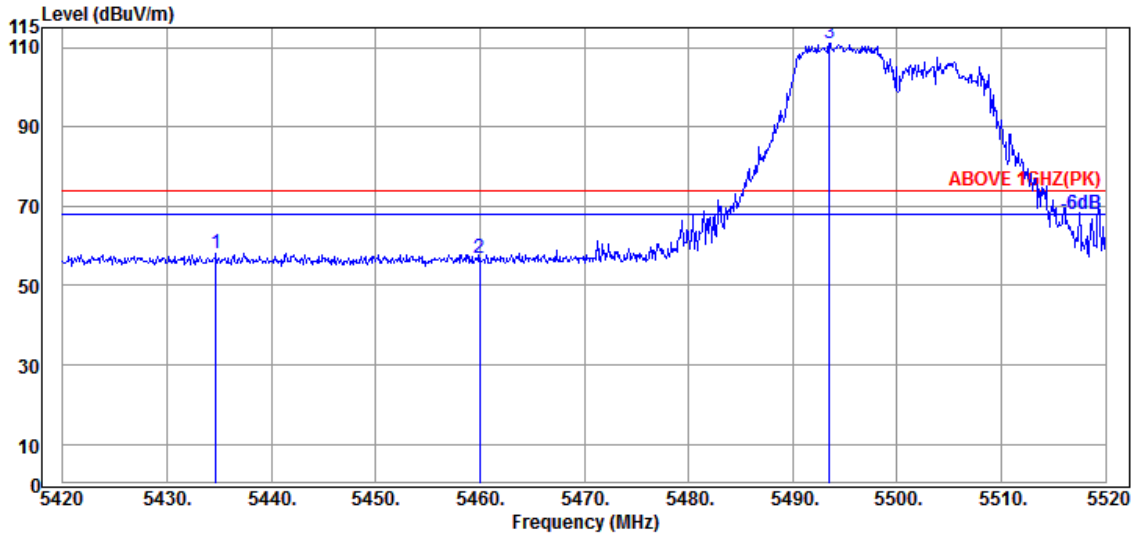

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5434.700 | 34.65 | 9.04 | 34.22 | 48.51 | 57.98 | 74.00 | 16.02 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 47.53 | 56.97 | 74.00 | 17.03 | Peak |
| @ 5493.500 | 34.67 | 9.07 | 34.20 | 101.54 | 111.08 | --- | --- | Peak |

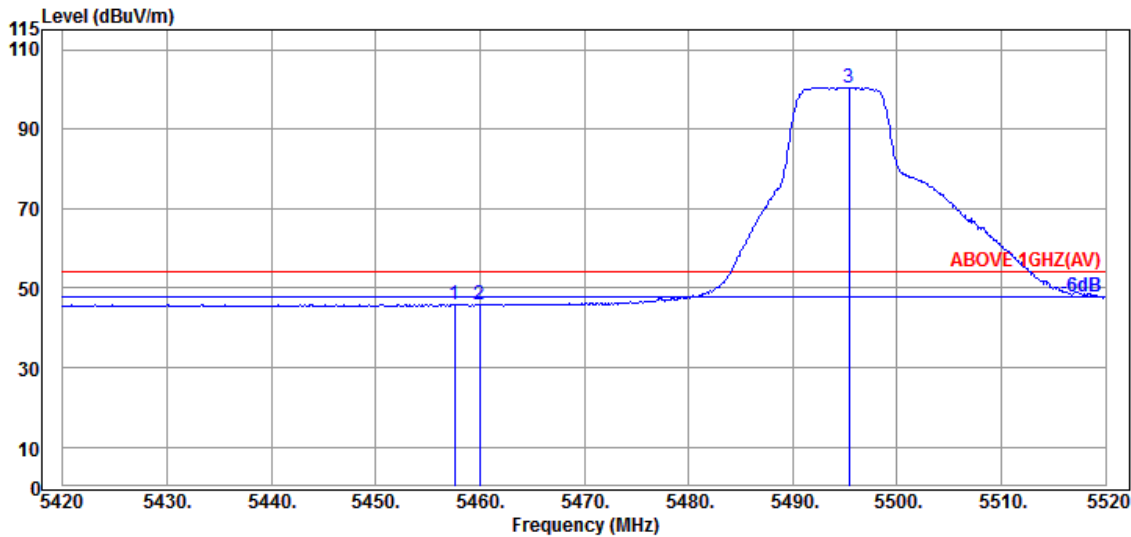


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.600 | 34.60 | 9.05 | 34.21 | 36.56 | 46.00 | 54.00 | 8.00 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.29 | 45.73 | 54.00 | 8.27 | Average |
| @ 5495.400 | 34.70 | 9.08 | 34.20 | 90.96 | 100.54 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 26/8 | Frequency | TX 5700MHz |

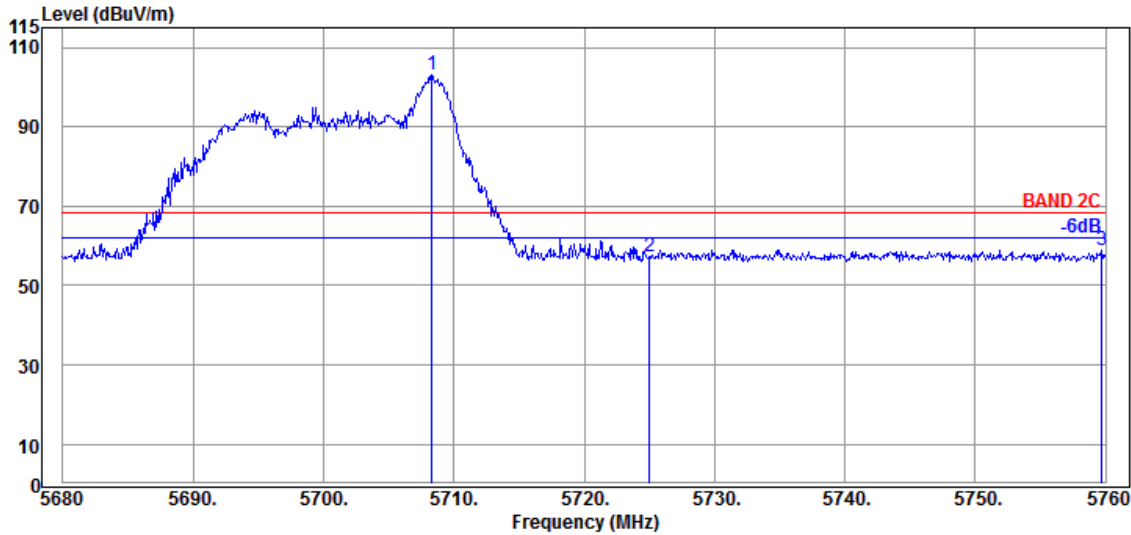

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.320 | 34.80 | 9.19 | 34.30 | 93.49 | 103.18 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 47.44 | 57.24 | 68.20 | 10.96 | Peak |
| 5759.680 | 35.03 | 9.21 | 34.32 | 49.12 | 59.04 | 68.20 | 9.16 | Peak |

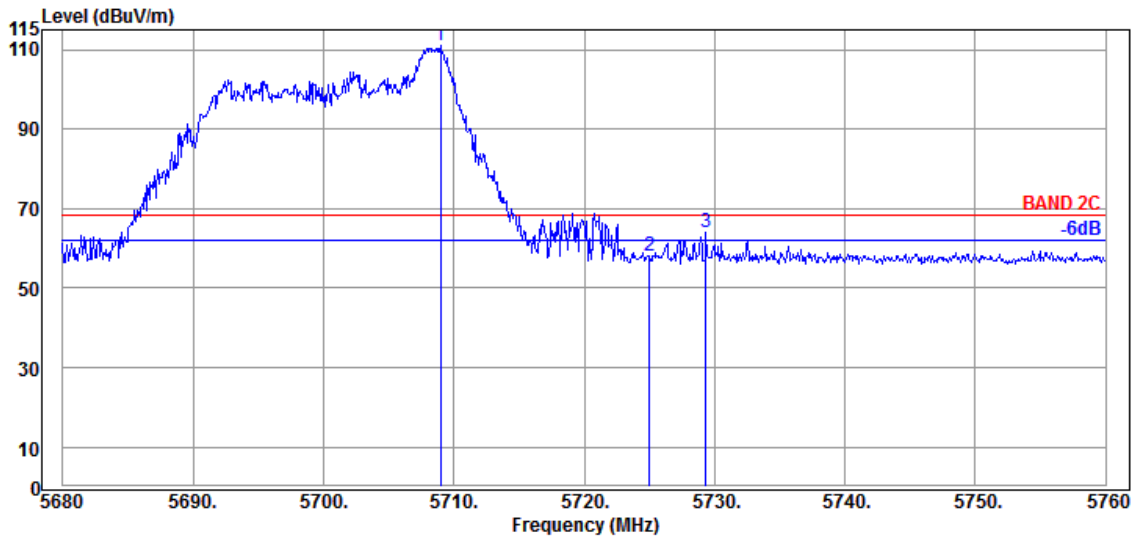


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5708.960 | 34.80 | 9.19 | 34.30 | 101.24 | 110.93 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 48.45 | 58.25 | 68.20 | 9.95 | Peak |
| 5729.360 | 34.90 | 9.20 | 34.31 | 54.40 | 64.19 | 68.20 | 4.01 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 52/40 | Frequency | TX 5700MHz |

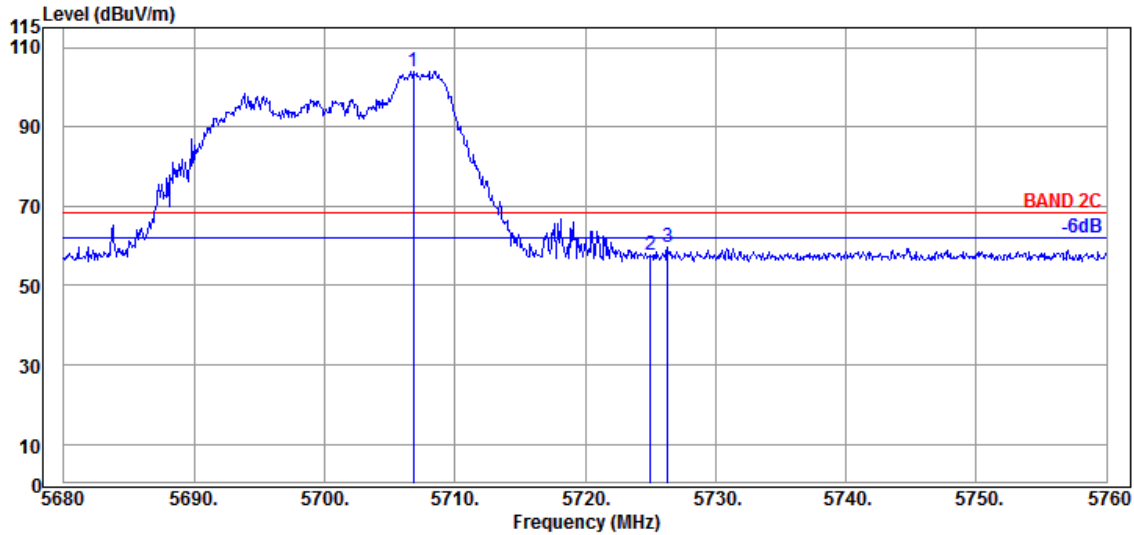

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5706.800 | 34.80 | 9.19 | 34.29 | 94.42 | 104.12 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 47.73 | 57.53 | 68.20 | 10.67 | Peak |
| 5726.320 | 34.90 | 9.20 | 34.30 | 49.72 | 59.52 | 68.20 | 8.68 | Peak |

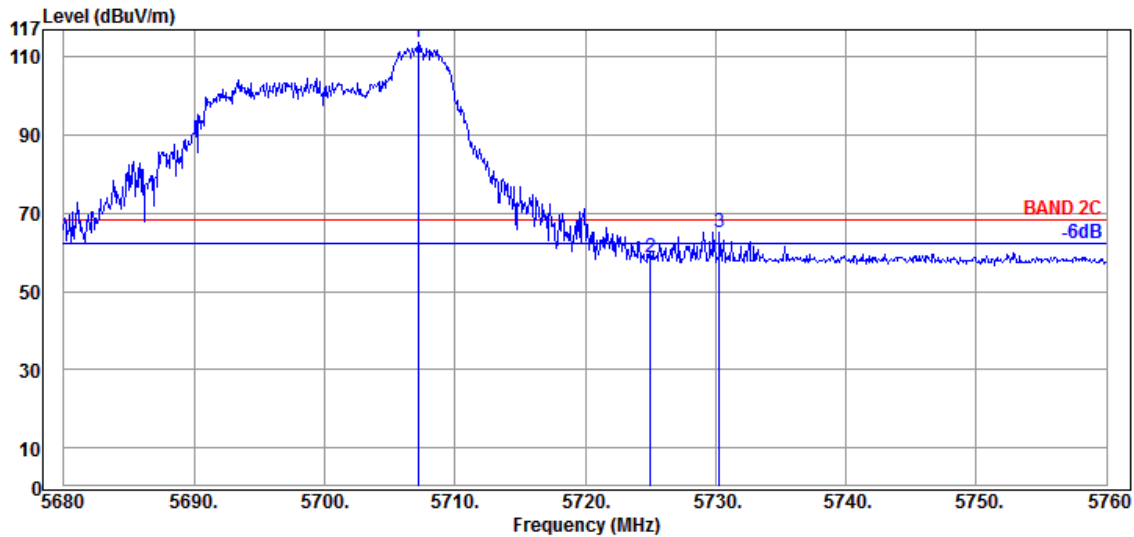


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5707.200 | 34.80 | 9.19 | 34.29 | 103.90 | 113.60 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 49.07 | 58.87 | 68.20 | 9.33 | Peak |
| 5730.320 | 34.90 | 9.20 | 34.31 | 55.52 | 65.31 | 68.20 | 2.89 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| RU Configuration | 106/54 | Frequency | TX 5700MHz |

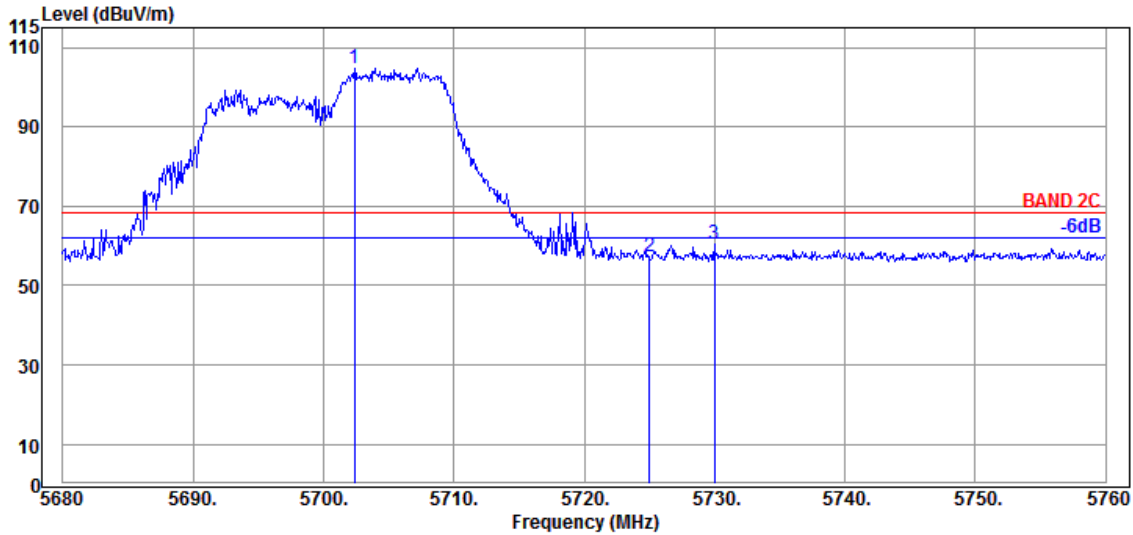

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5702.400 | 34.70 | 9.18 | 34.29 | 95.15 | 104.74 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 47.34 | 57.14 | 68.20 | 11.06 | Peak |
| 5730.000 | 34.90 | 9.20 | 34.31 | 50.57 | 60.36 | 68.20 | 7.84 | Peak |

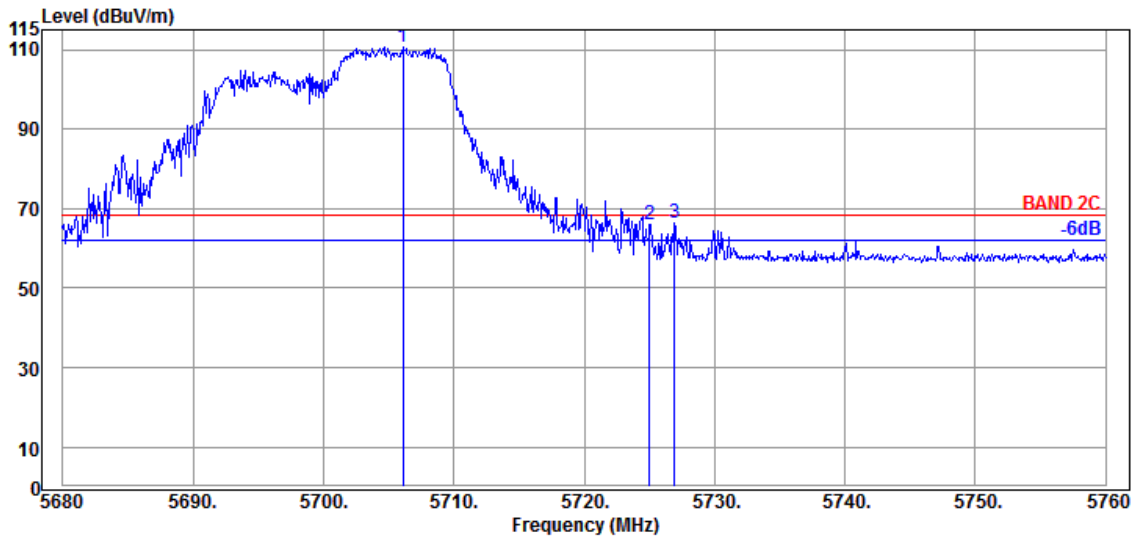


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5706.080 | 34.80 | 9.19 | 34.29 | 100.89 | 110.59 | --- | --- | Peak |
| 5725.040 | 34.90 | 9.20 | 34.30 | 56.22 | 66.02 | 68.20 | 2.18 | Peak |
| 5726.960 | 34.90 | 9.20 | 34.31 | 56.53 | 66.32 | 68.20 | 1.88 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 26/0 | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

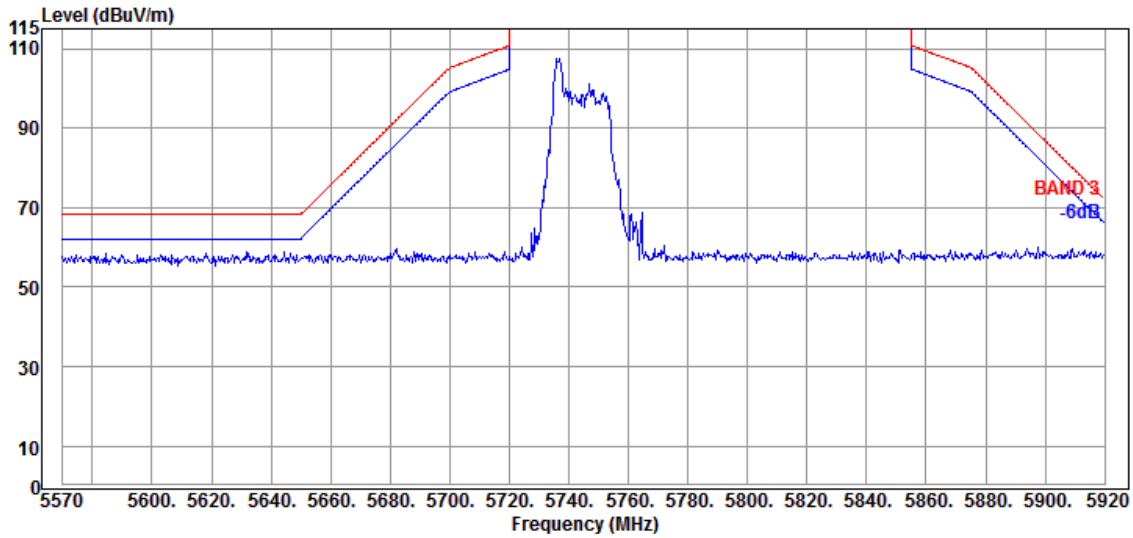


Antenna at Vertical Polarization

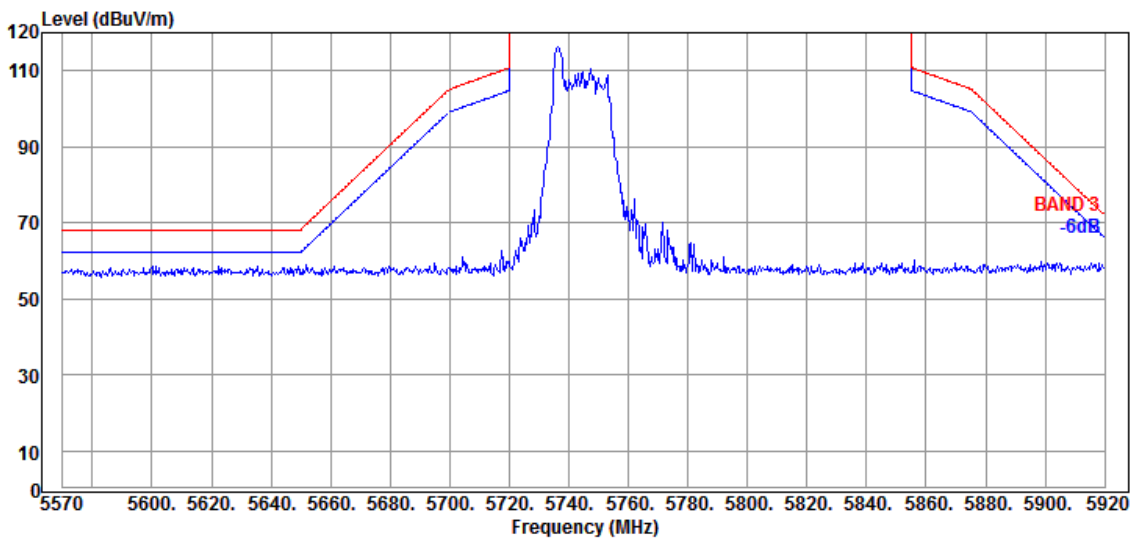


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 52/37 | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

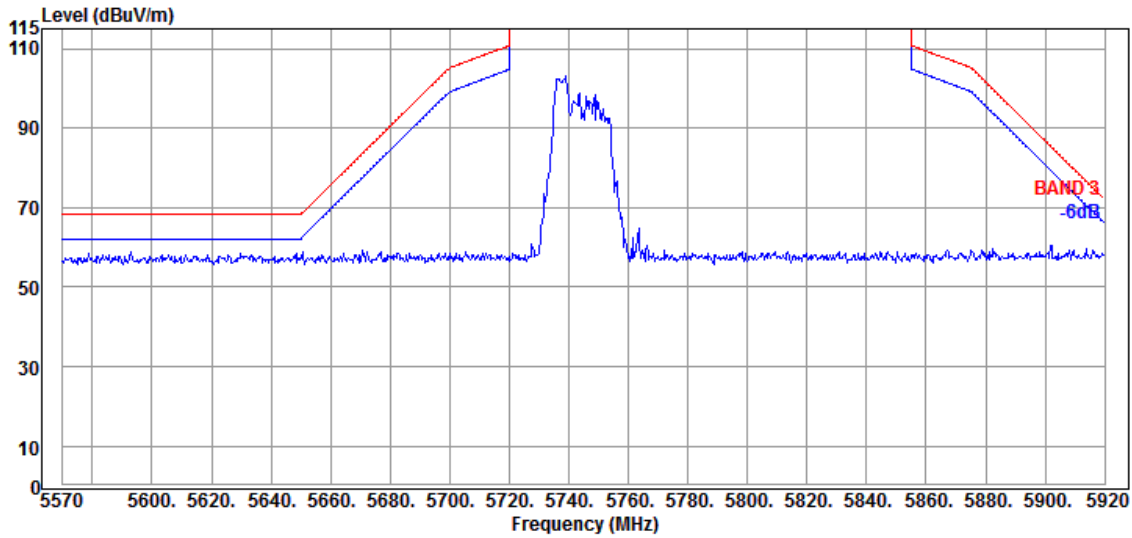


Antenna at Vertical Polarization

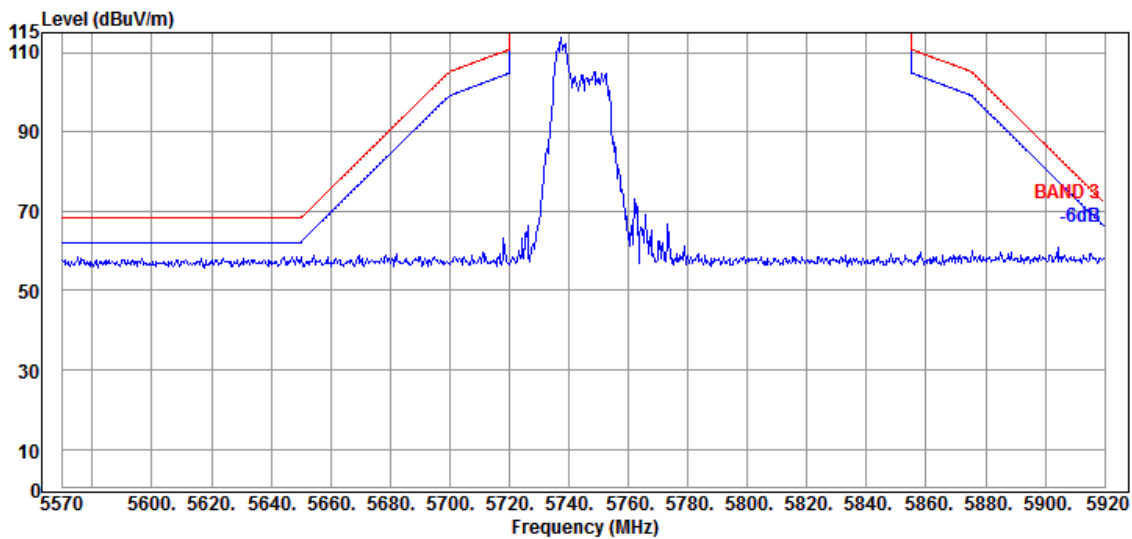


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 106/53 | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

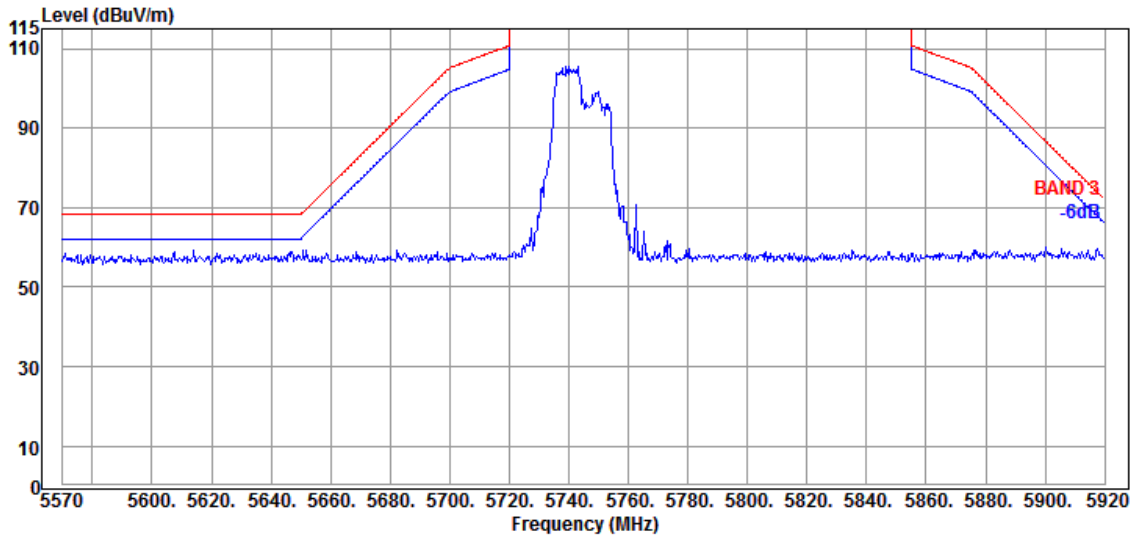


Antenna at Vertical Polarization

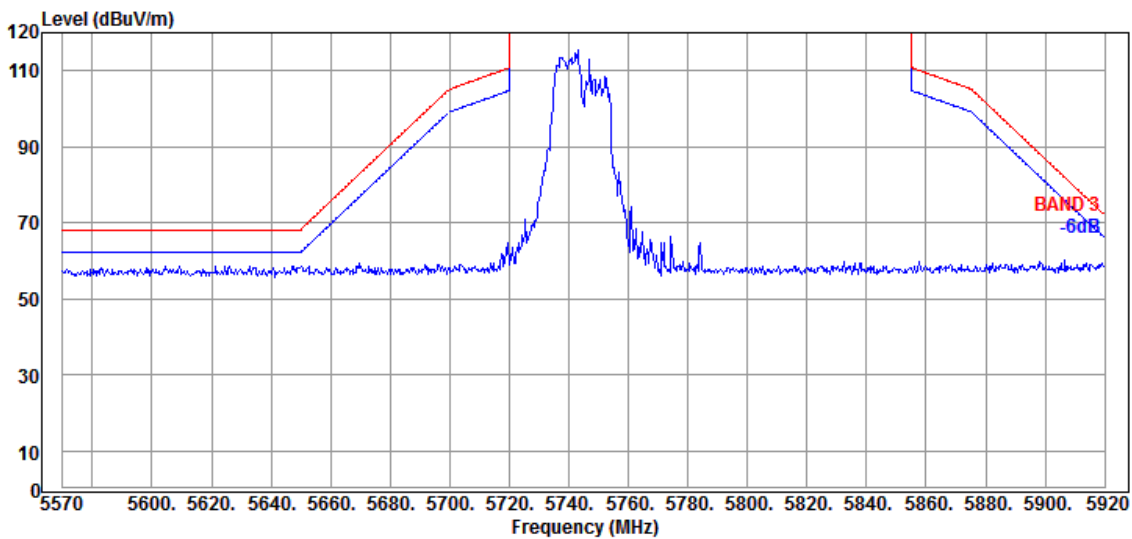


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 26/8 | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

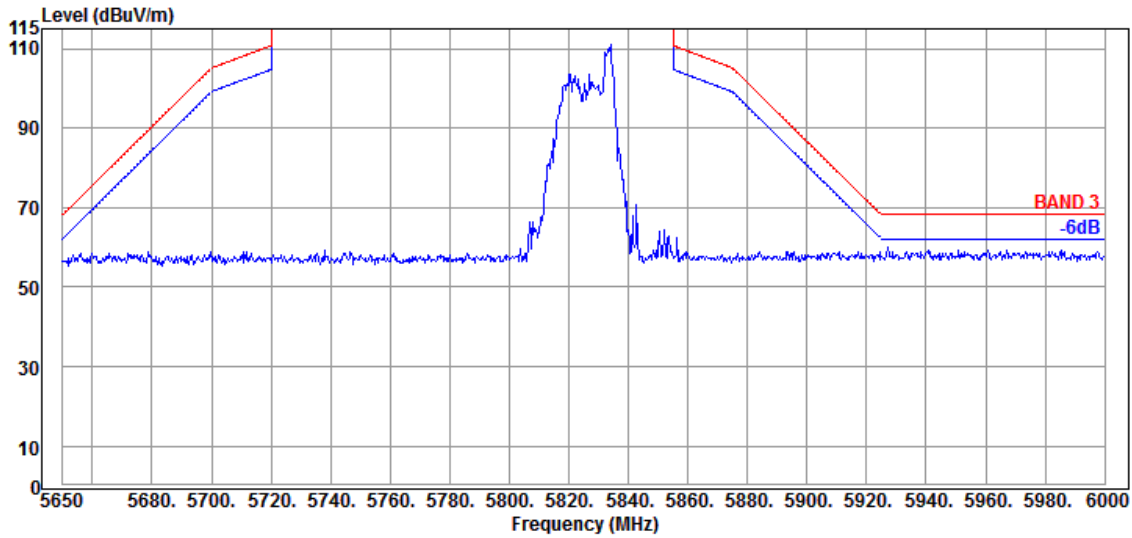


Antenna at Vertical Polarization

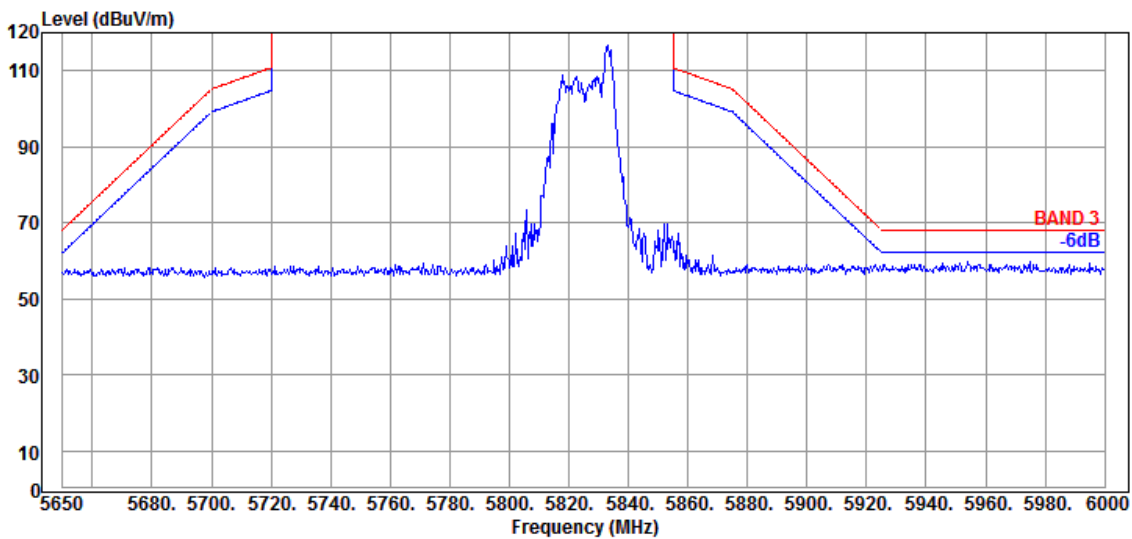


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 52/40 | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

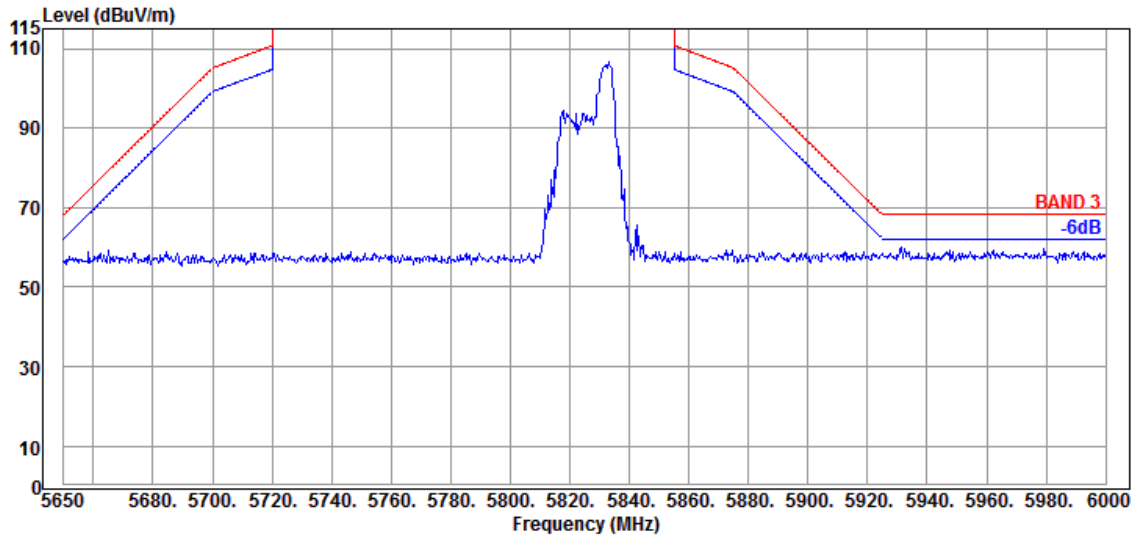


Antenna at Vertical Polarization

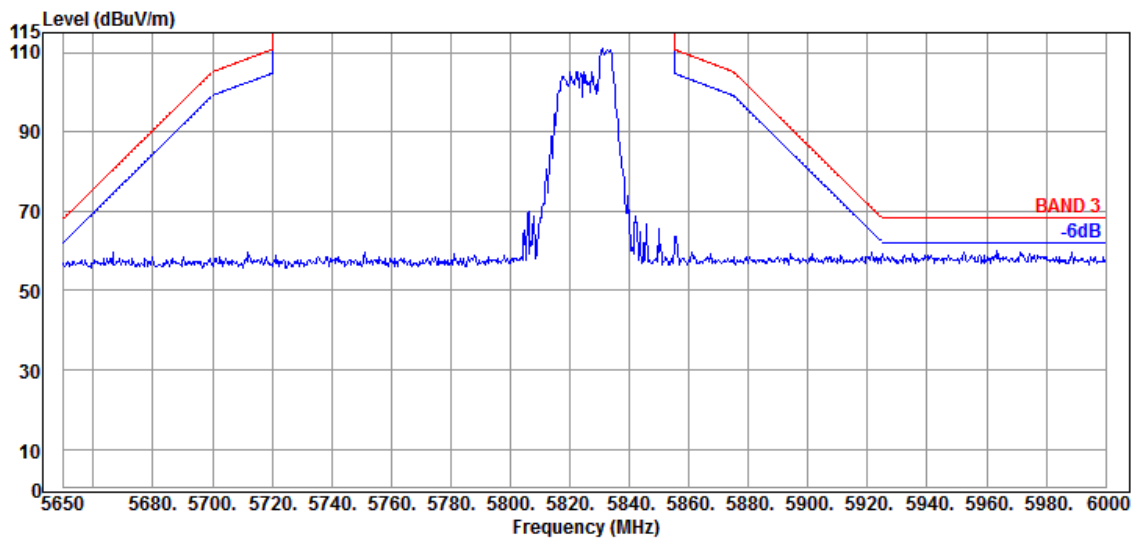


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| RU Configuration | 106/54 | Frequency | TX 5825MHz |


Antenna at Horizontal Polarization

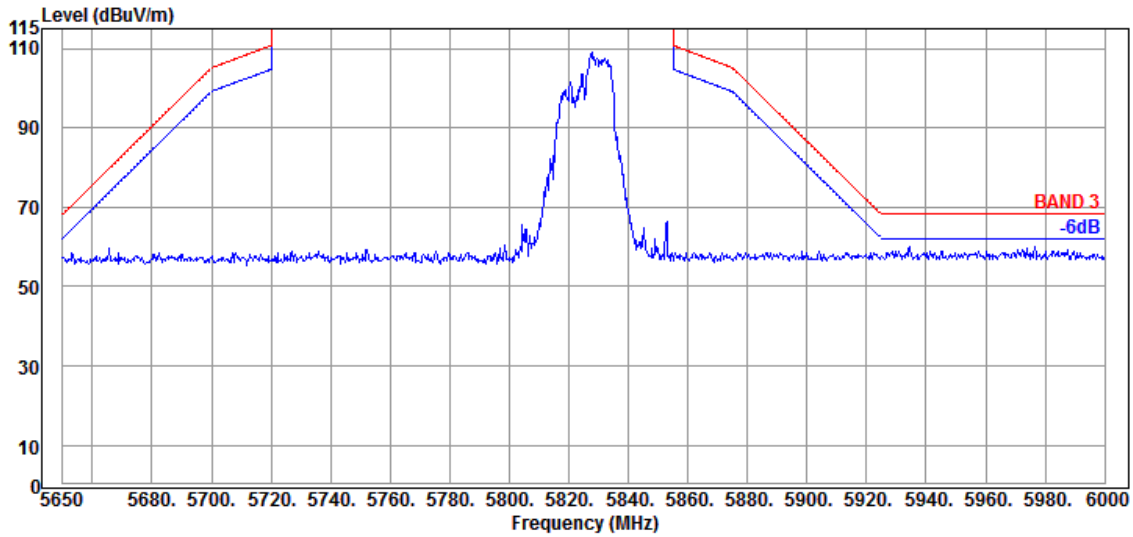

Antenna at Vertical Polarization

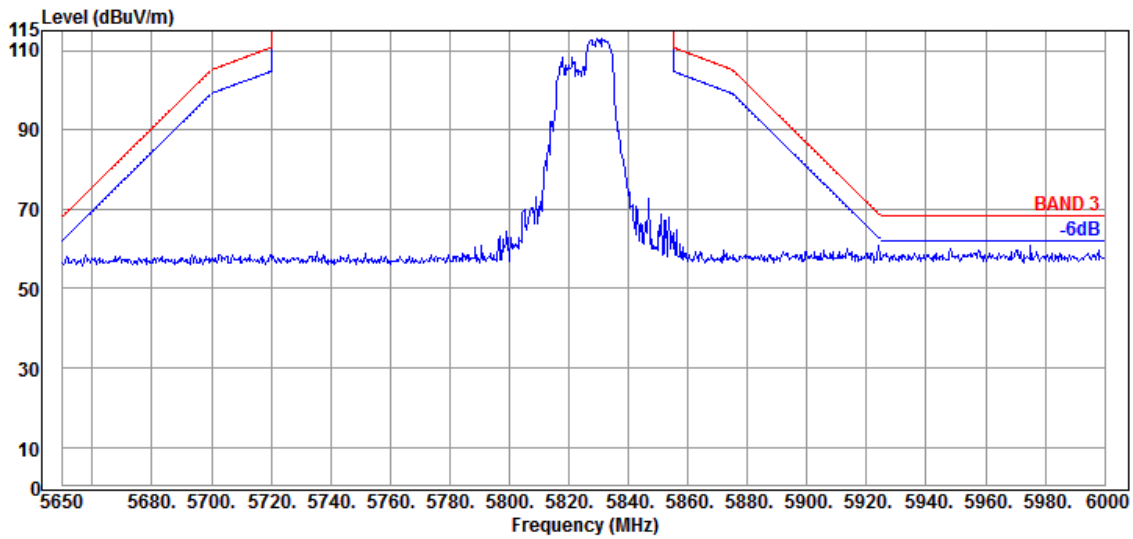


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| RU Configuration | 242/61 | Frequency | TX 5190MHz |

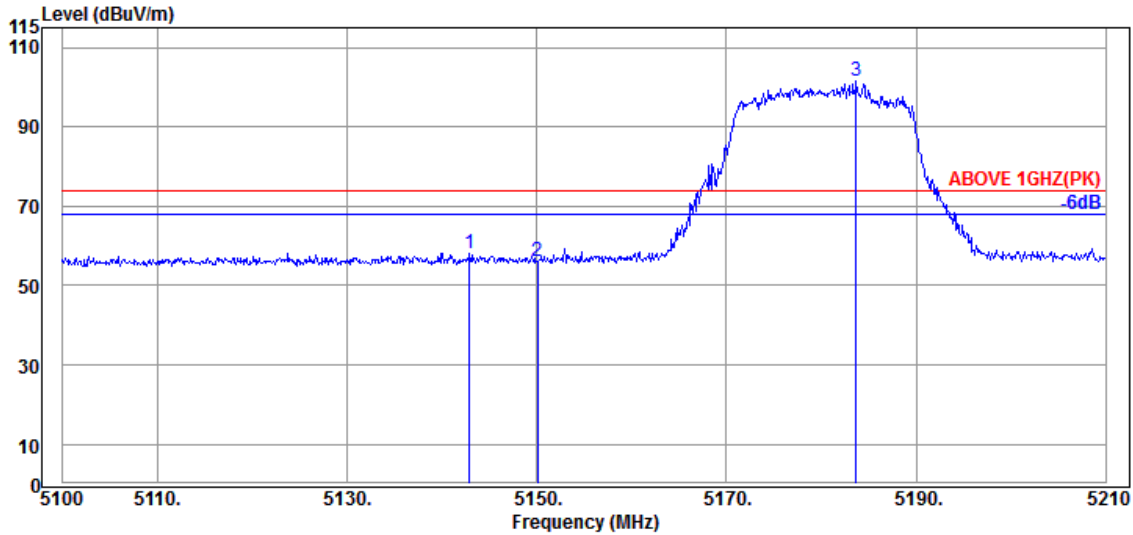

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5142.900 | 34.50 | 8.88 | 34.34 | 49.19 | 58.23 | 74.00 | 15.77 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 47.04 | 56.08 | 74.00 | 17.92 | Peak |
| @ 5183.710 | 34.63 | 8.90 | 34.32 | 92.24 | 101.45 | --- | --- | Peak |

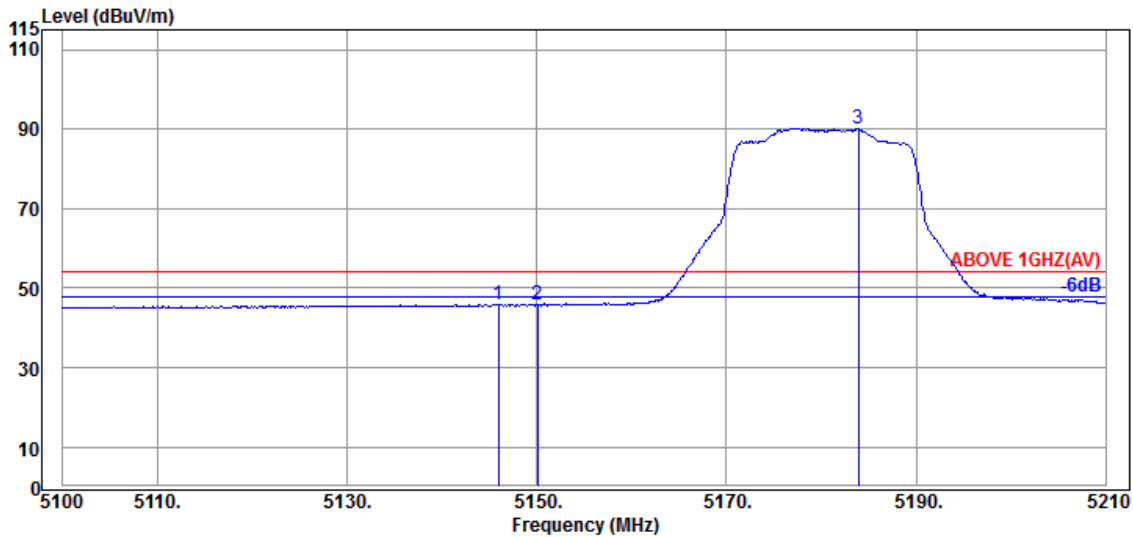


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.980 | 34.50 | 8.88 | 34.34 | 36.88 | 45.92 | 54.00 | 8.08 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 36.63 | 45.67 | 54.00 | 8.33 | Average |
| @ 5183.930 | 34.63 | 8.90 | 34.32 | 81.00 | 90.21 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| RU Configuration | 242/61 | Frequency | TX 5190MHz |

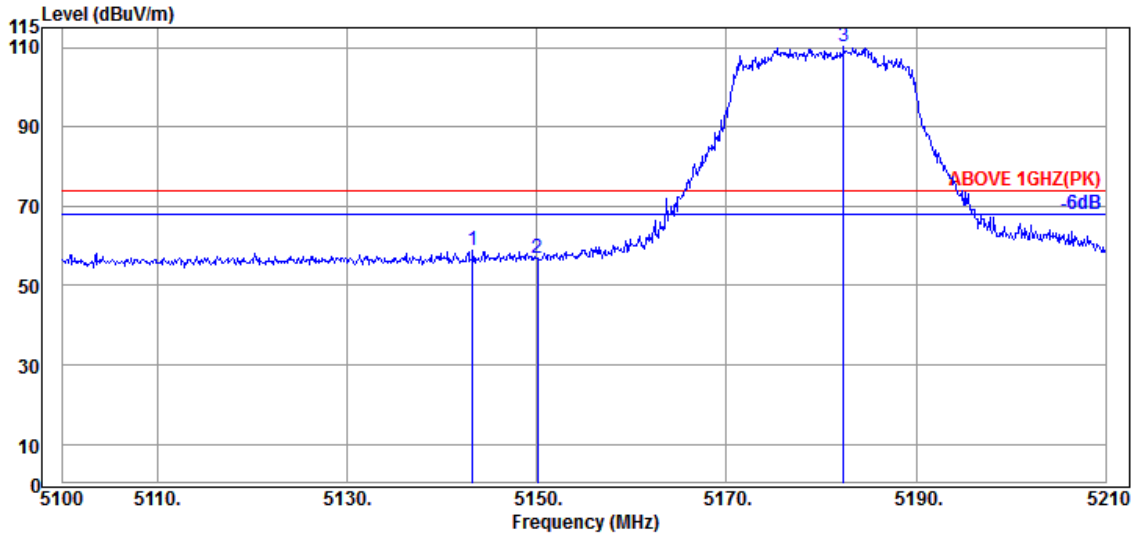

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5143.230 | 34.50 | 8.88 | 34.34 | 49.81 | 58.85 | 74.00 | 15.15 | Peak |
| 5150.050 | 34.50 | 8.88 | 34.34 | 47.82 | 56.86 | 74.00 | 17.14 | Peak |
| @ 5182.390 | 34.63 | 8.90 | 34.32 | 100.97 | 110.18 | --- | --- | Peak |

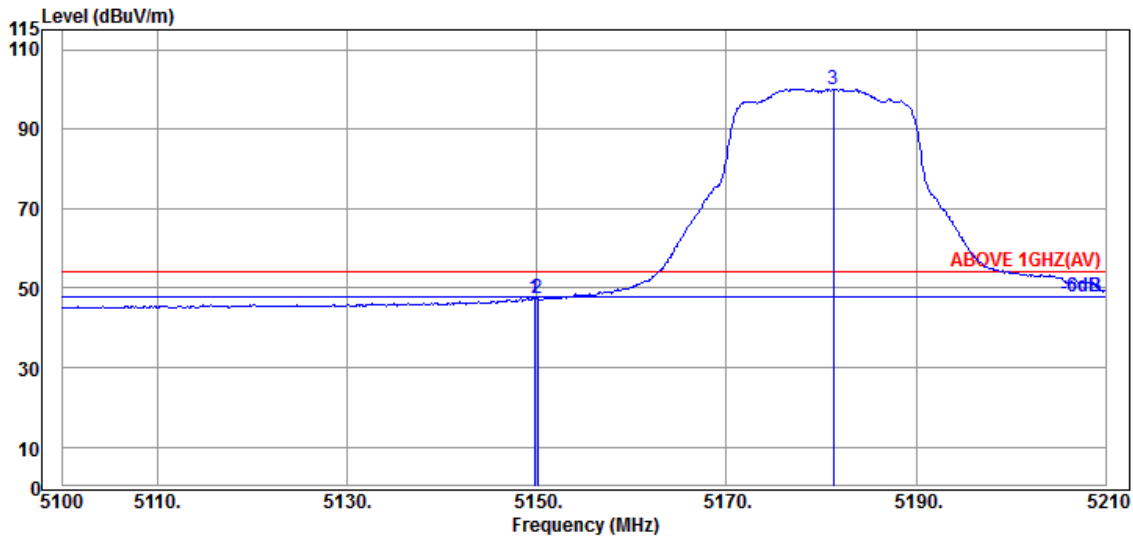


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.720 | 34.50 | 8.88 | 34.34 | 38.33 | 47.37 | 54.00 | 6.63 | Average |
| 5150.050 | 34.50 | 8.88 | 34.34 | 38.44 | 47.48 | 54.00 | 6.52 | Average |
| @ 5181.290 | 34.63 | 8.90 | 34.32 | 90.82 | 100.03 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| RU Configuration | 242/62 | Frequency | TX 5310MHz |

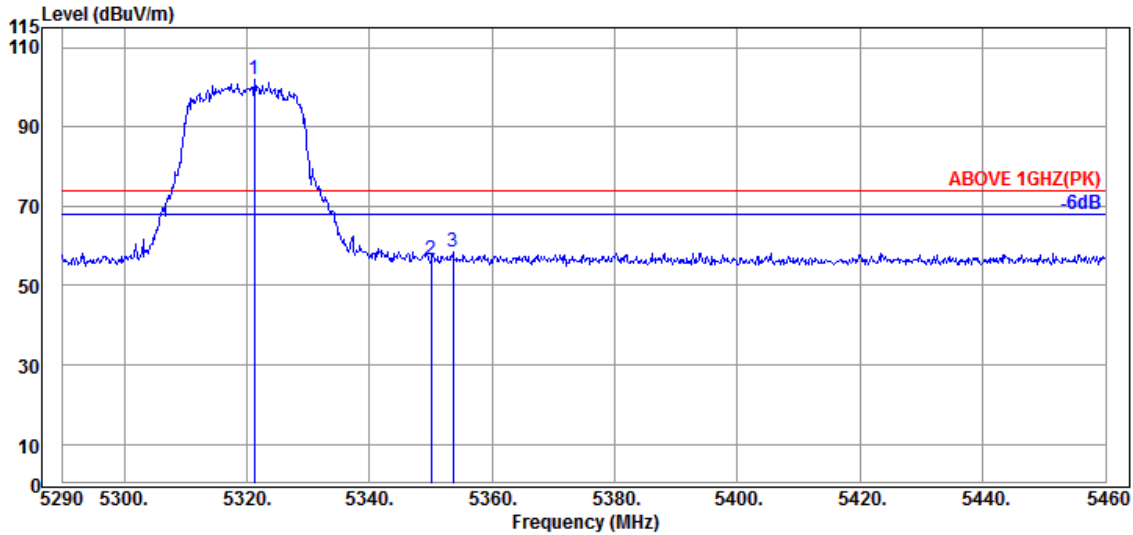

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5321.280 | 34.57 | 8.98 | 34.27 | 92.66 | 101.94 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 46.98 | 56.61 | 74.00 | 17.39 | Peak |
| 5353.580 | 34.90 | 8.99 | 34.26 | 48.80 | 58.43 | 74.00 | 15.57 | Peak |

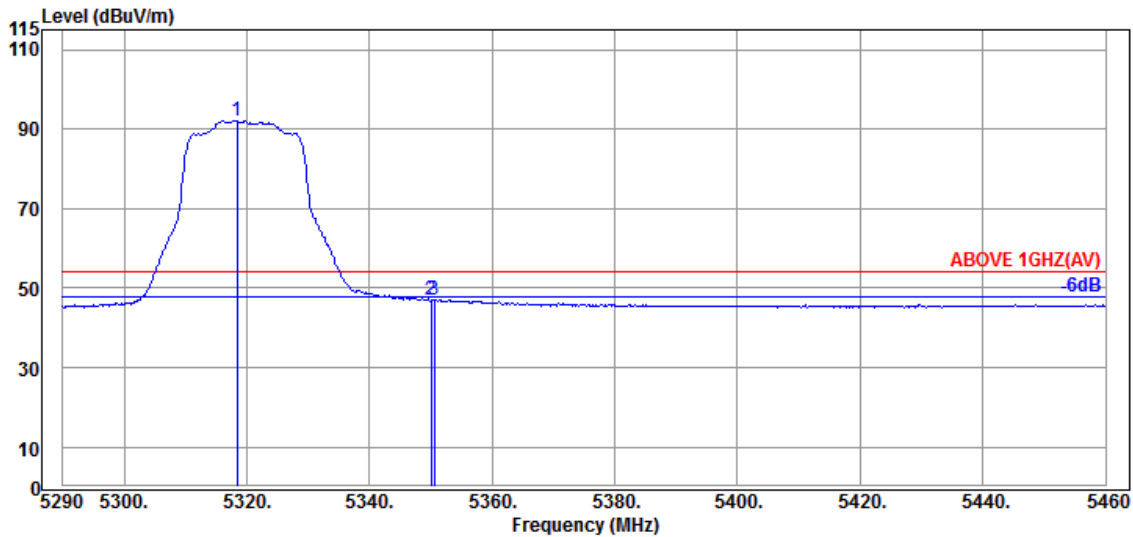


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.390 | 34.57 | 8.98 | 34.27 | 82.82 | 92.10 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 37.31 | 46.94 | 54.00 | 7.06 | Average |
| 5350.520 | 34.90 | 8.99 | 34.26 | 37.41 | 47.04 | 54.00 | 6.96 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| RU Configuration | 242/62 | Frequency | TX 5310MHz |

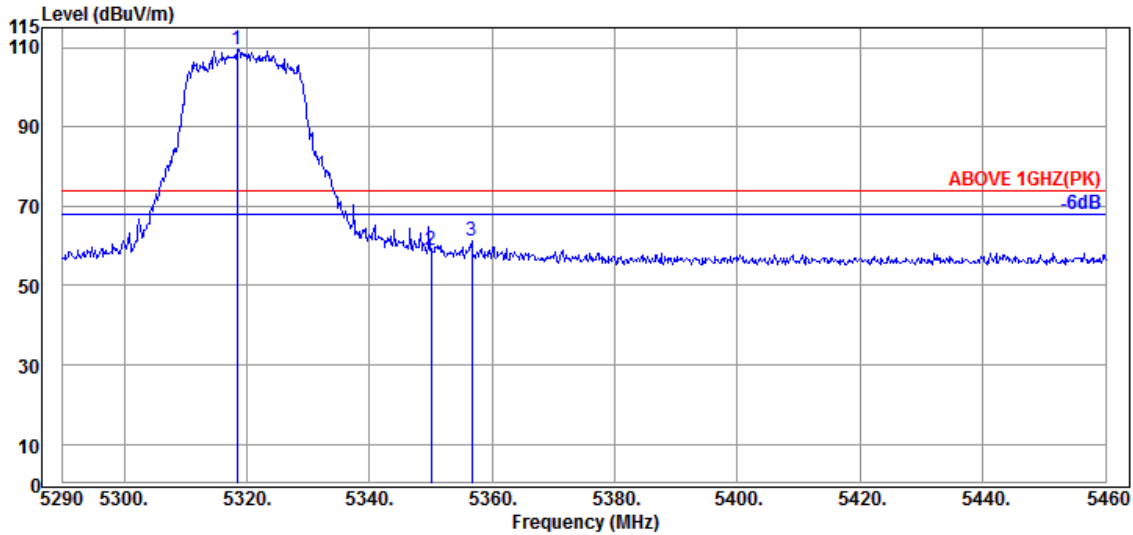

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5318.390 | 34.57 | 8.98 | 34.27 | 100.21 | 109.49 | --- | --- | Peak |
| 5350.010 | 34.90 | 8.99 | 34.26 | 49.19 | 58.82 | 74.00 | 15.18 | Peak |
| 5356.640 | 34.87 | 9.00 | 34.26 | 51.79 | 61.40 | 74.00 | 12.60 | Peak |

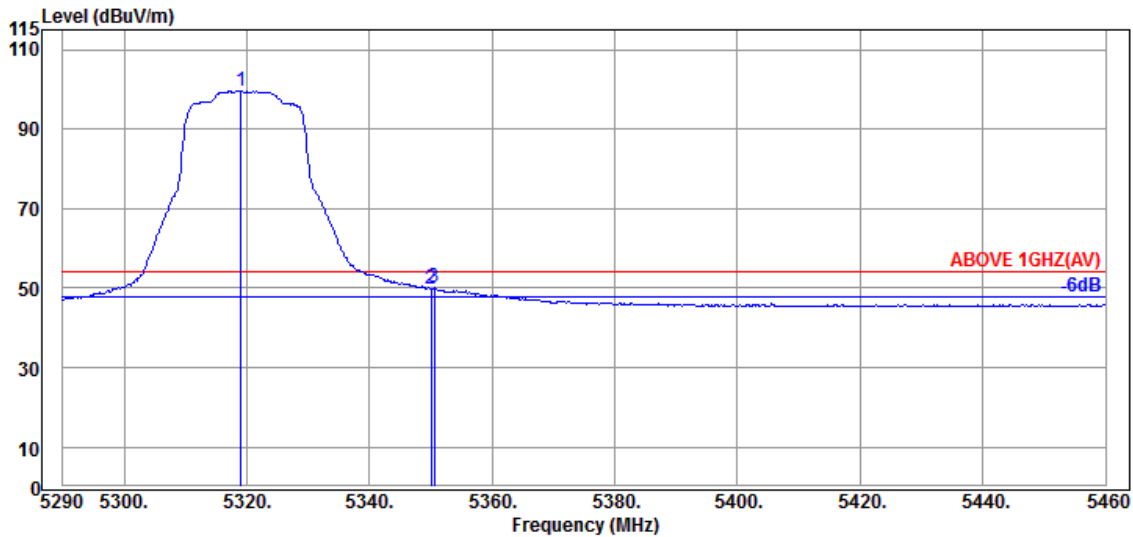


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5319.070 | 34.57 | 8.98 | 34.27 | 90.50 | 99.78 | --- | --- | Average |
| 5350.010 | 34.90 | 8.99 | 34.26 | 40.27 | 49.90 | 54.00 | 4.10 | Average |
| 5350.520 | 34.90 | 8.99 | 34.26 | 40.37 | 50.00 | 54.00 | 4.00 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/61 | Frequency | TX 5510MHz |

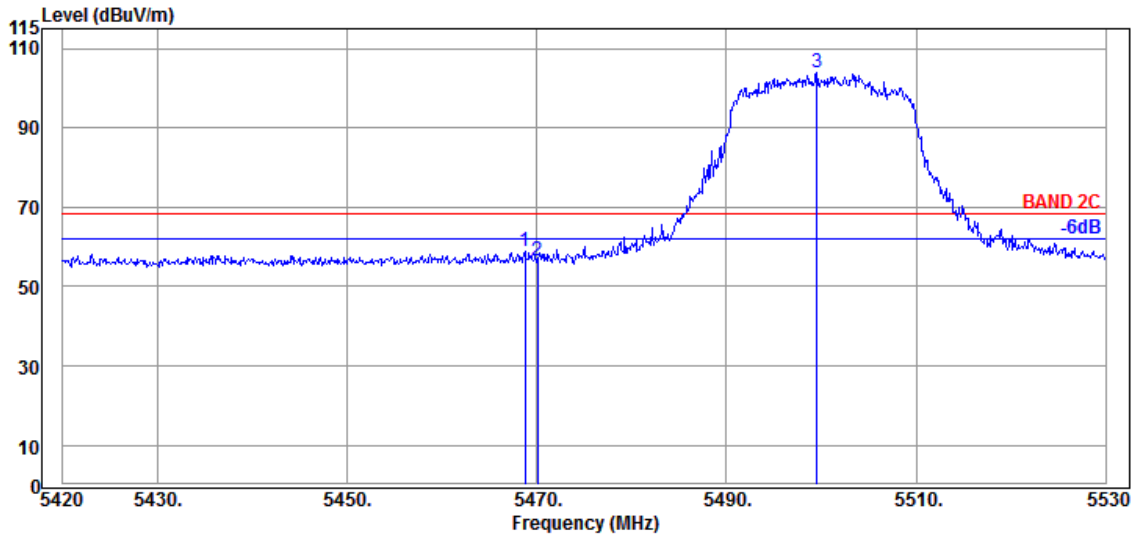

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.730 | 34.63 | 9.06 | 34.21 | 49.57 | 59.05 | 68.20 | 9.15 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 47.20 | 56.68 | 68.20 | 11.52 | Peak |
| @ 5499.530 | 34.70 | 9.08 | 34.20 | 94.16 | 103.74 | --- | --- | Peak |

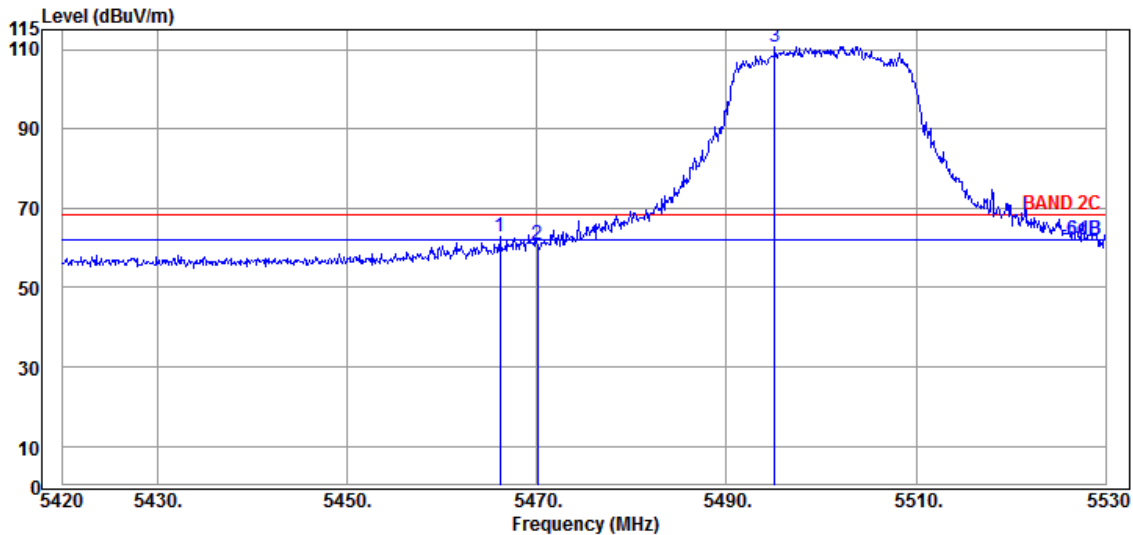


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.090 | 34.63 | 9.06 | 34.21 | 53.25 | 62.73 | 68.20 | 5.47 | Peak |
| 5470.050 | 34.63 | 9.06 | 34.21 | 51.31 | 60.79 | 68.20 | 7.41 | Peak |
| @ 5495.130 | 34.67 | 9.07 | 34.20 | 101.27 | 110.81 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/61 | Frequency | TX 5510MHz |

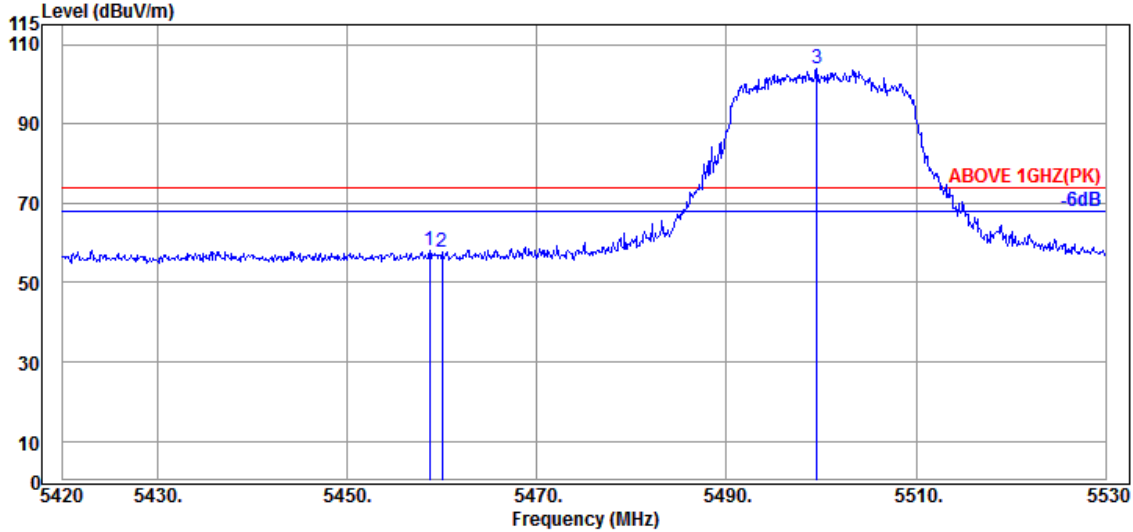

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.720 | 34.60 | 9.05 | 34.21 | 48.51 | 57.95 | 74.00 | 16.05 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 48.15 | 57.59 | 74.00 | 16.41 | Peak |
| @ 5499.530 | 34.70 | 9.08 | 34.20 | 94.16 | 103.74 | --- | --- | Peak |

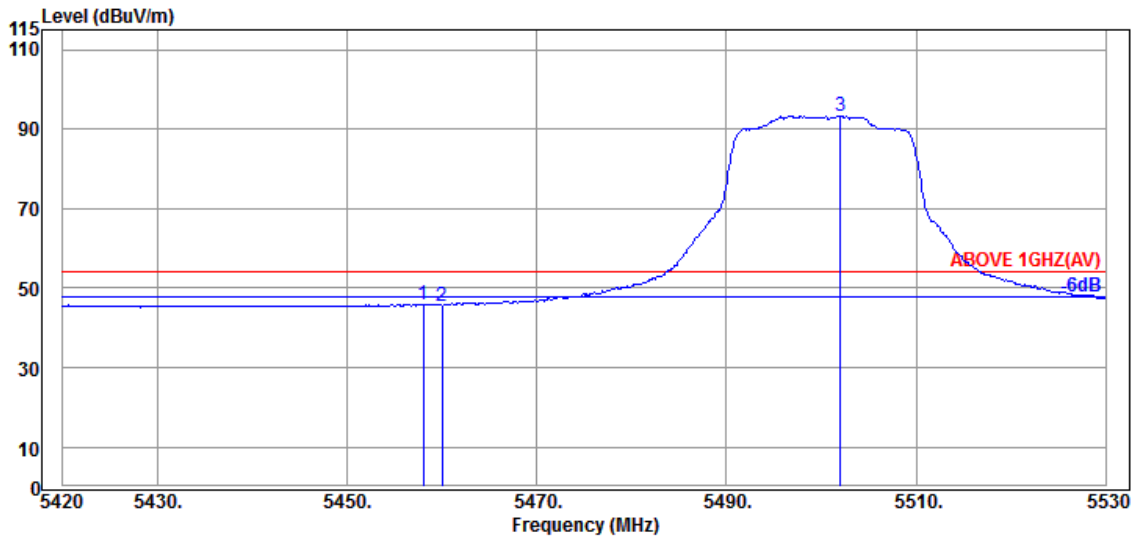


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.060 | 34.60 | 9.05 | 34.21 | 36.57 | 46.01 | 54.00 | 7.99 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 36.20 | 45.64 | 54.00 | 8.36 | Average |
| @ 5502.060 | 34.70 | 9.08 | 34.20 | 83.78 | 93.36 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/61 | Frequency | TX 5510MHz |

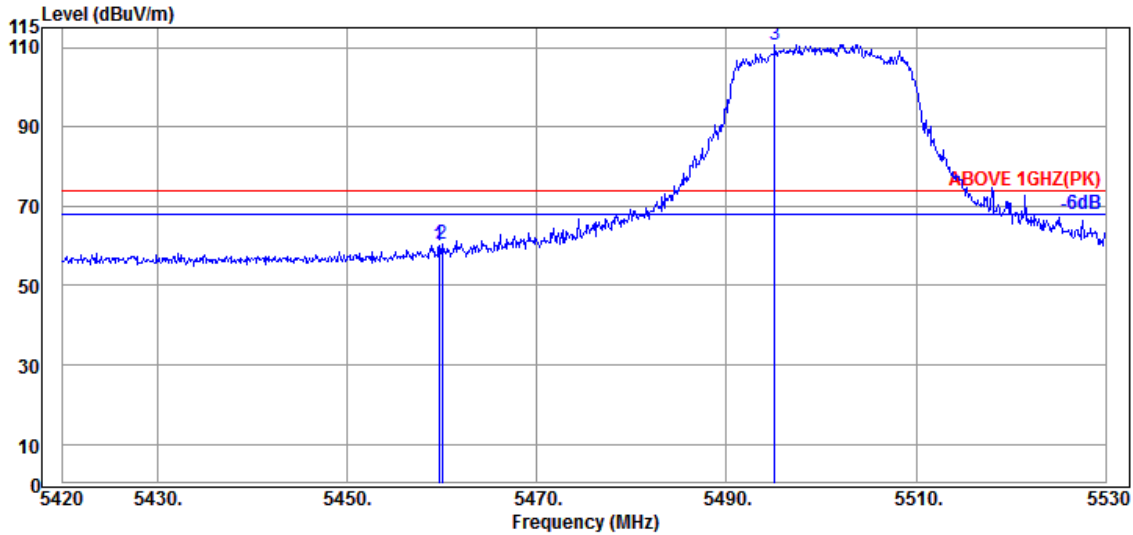

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.710 | 34.60 | 9.05 | 34.21 | 50.55 | 59.99 | 74.00 | 14.01 | Peak |
| 5460.040 | 34.60 | 9.05 | 34.21 | 50.84 | 60.28 | 74.00 | 13.72 | Peak |
| @ 5495.130 | 34.67 | 9.07 | 34.20 | 101.27 | 110.81 | --- | --- | Peak |

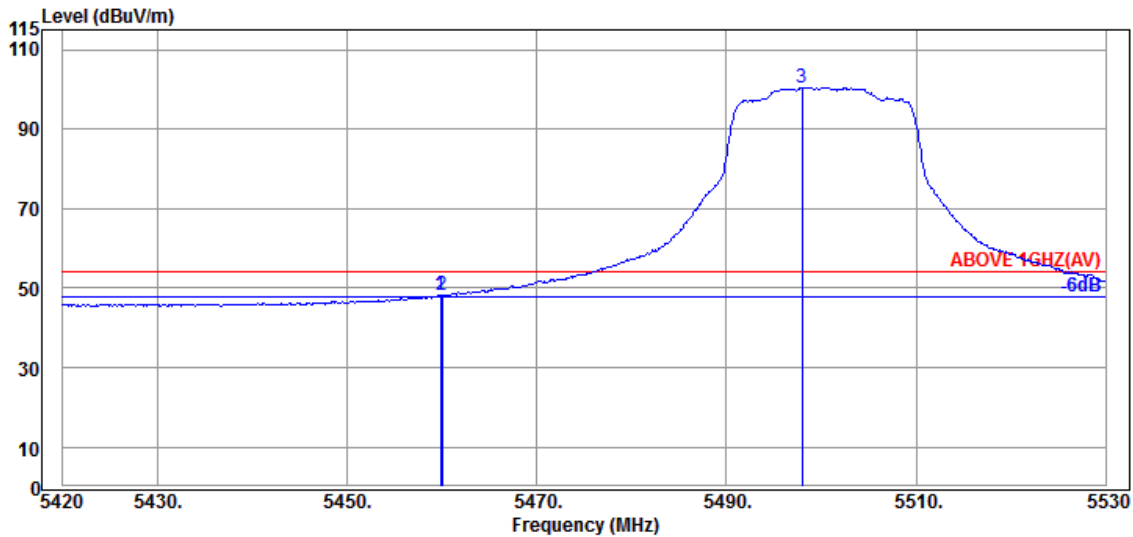


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.820 | 34.60 | 9.05 | 34.21 | 38.84 | 48.28 | 54.00 | 5.72 | Average |
| 5460.040 | 34.60 | 9.05 | 34.21 | 38.95 | 48.39 | 54.00 | 5.61 | Average |
| @ 5497.990 | 34.70 | 9.08 | 34.20 | 90.83 | 100.41 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| RU Configuration | 242/62 | Frequency | TX 5670MHz |

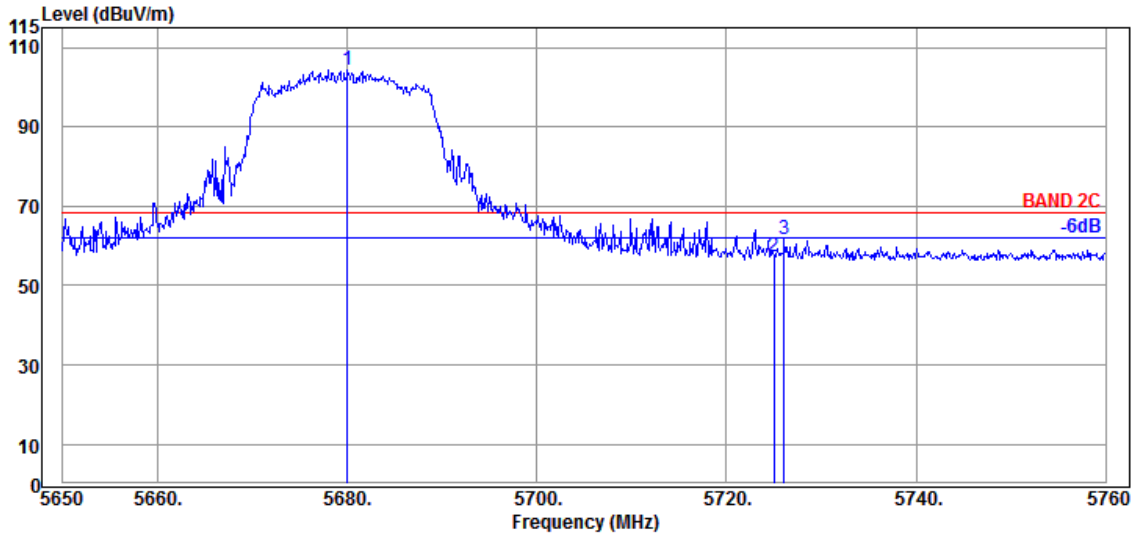

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5680.030 | 34.63 | 9.17 | 34.29 | 94.75 | 104.26 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 47.58 | 57.38 | 68.20 | 10.82 | Peak |
| 5726.120 | 34.90 | 9.20 | 34.30 | 51.93 | 61.73 | 68.20 | 6.47 | Peak |

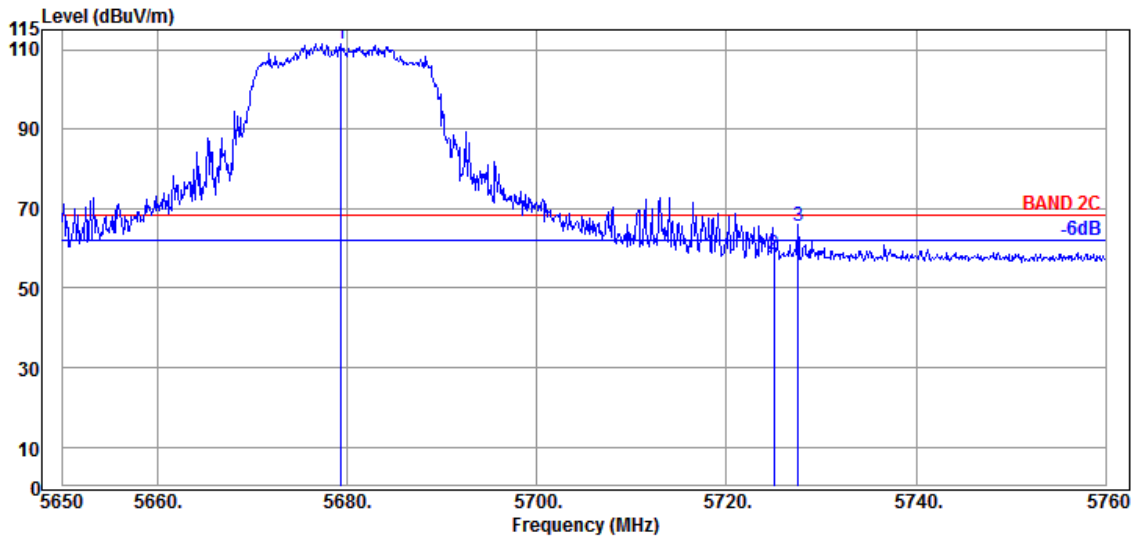


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5679.370 | 34.63 | 9.17 | 34.29 | 101.97 | 111.48 | --- | --- | Peak |
| 5725.020 | 34.90 | 9.20 | 34.30 | 48.54 | 58.34 | 68.20 | 9.86 | Peak |
| 5727.550 | 34.90 | 9.20 | 34.31 | 55.89 | 65.68 | 68.20 | 2.52 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| RU Configuration | 242/61 | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

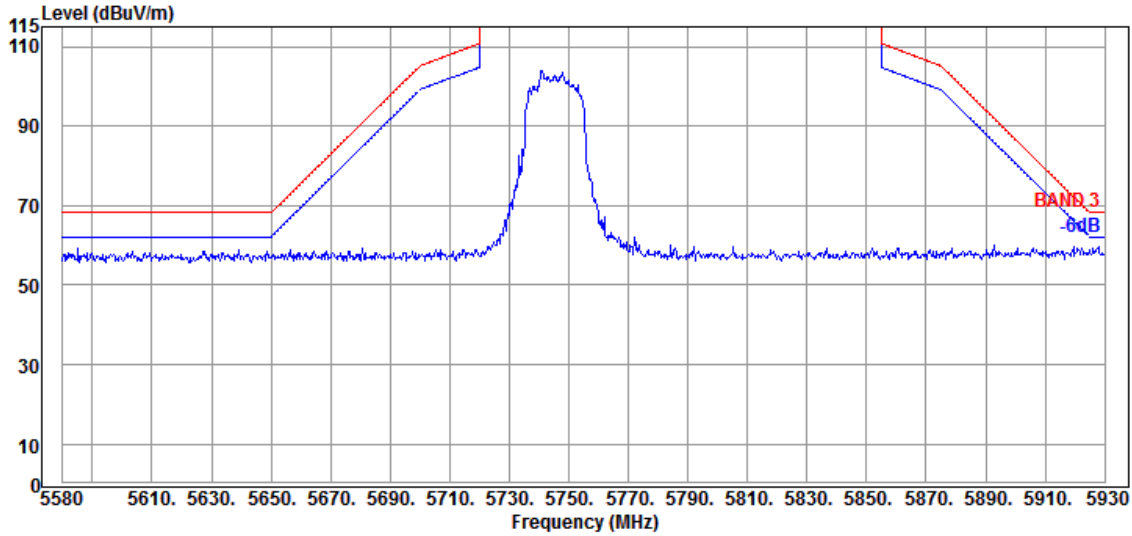


Antenna at Vertical Polarization

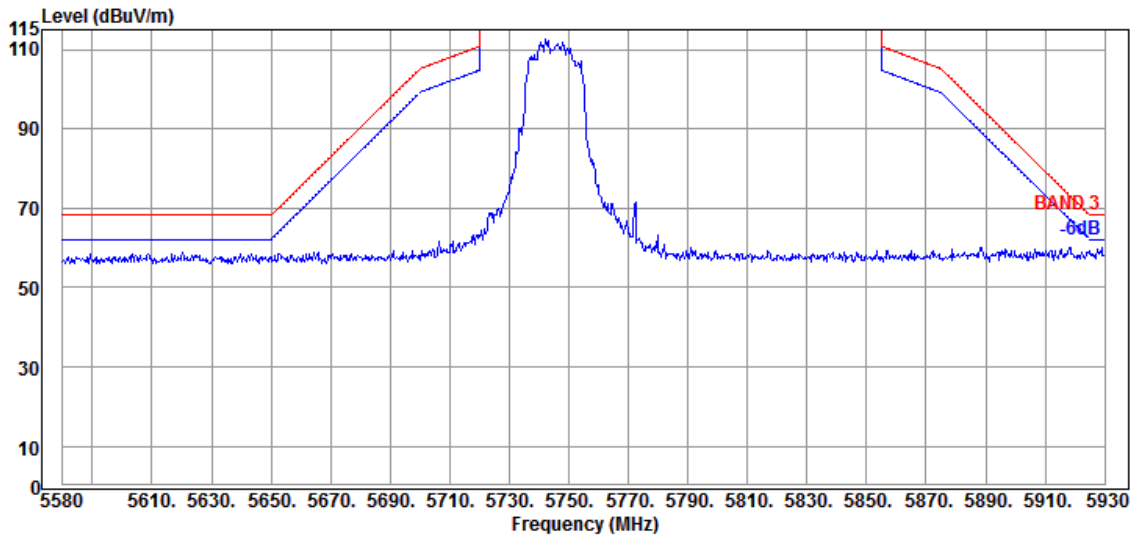


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| RU Configuration | 242/62 | Frequency | TX 5795MHz |


Antenna at Horizontal Polarization

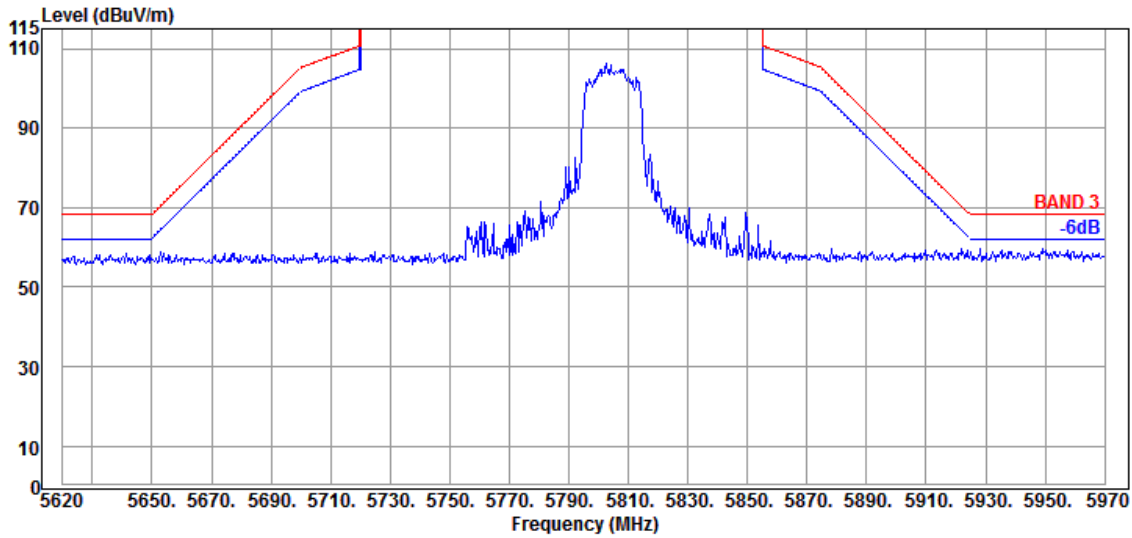

Antenna at Vertical Polarization

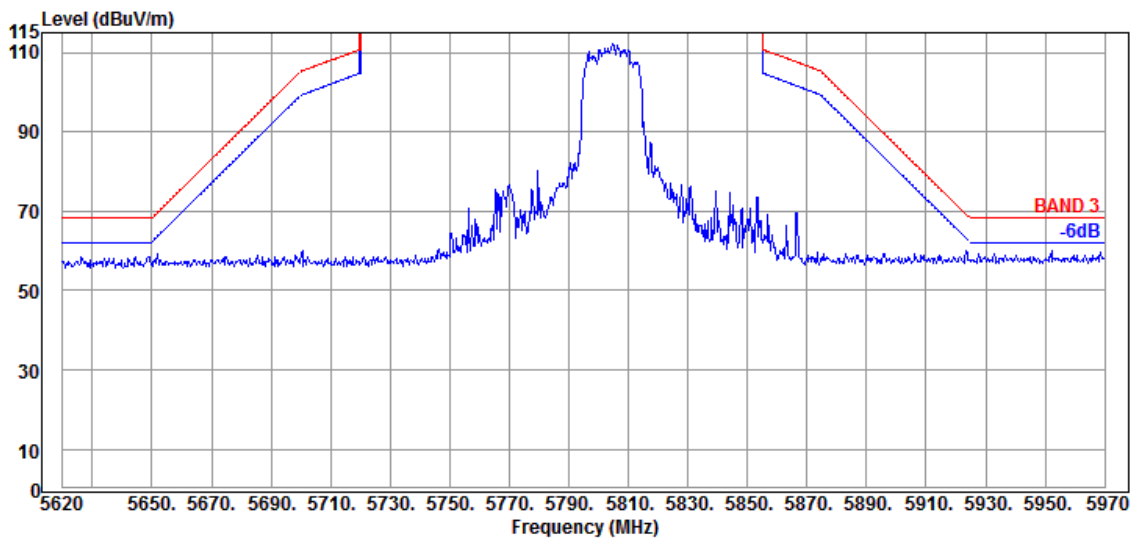


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| RU Configuration | 484/65 | Frequency | TX 5210MHz |

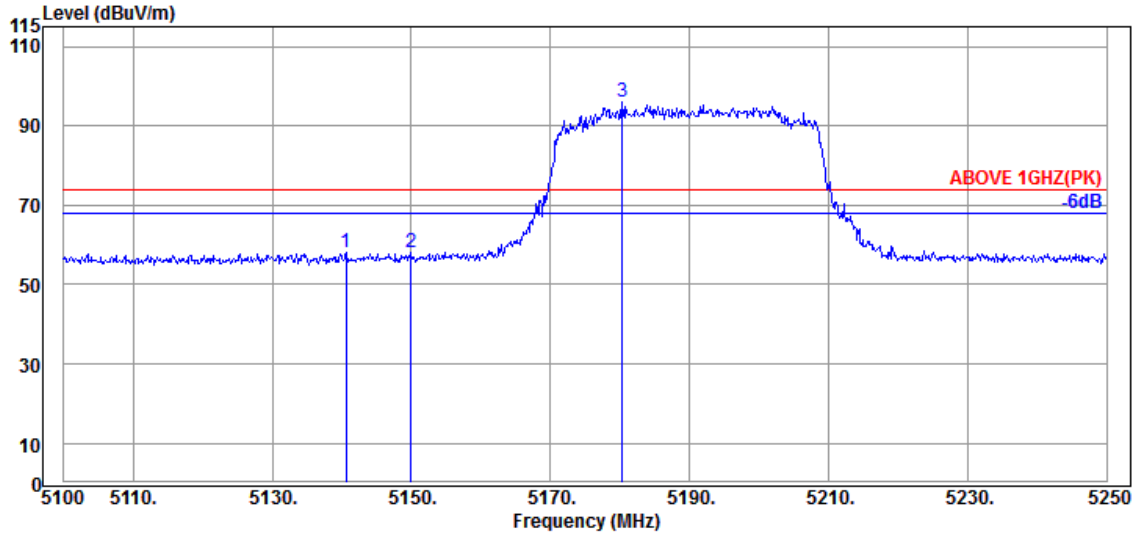

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5140.650 | 34.40 | 8.88 | 34.34 | 49.02 | 57.96 | 74.00 | 16.04 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 49.04 | 58.08 | 74.00 | 15.92 | Peak |
| @ 5180.400 | 34.63 | 8.90 | 34.32 | 86.80 | 96.01 | --- | --- | Peak |

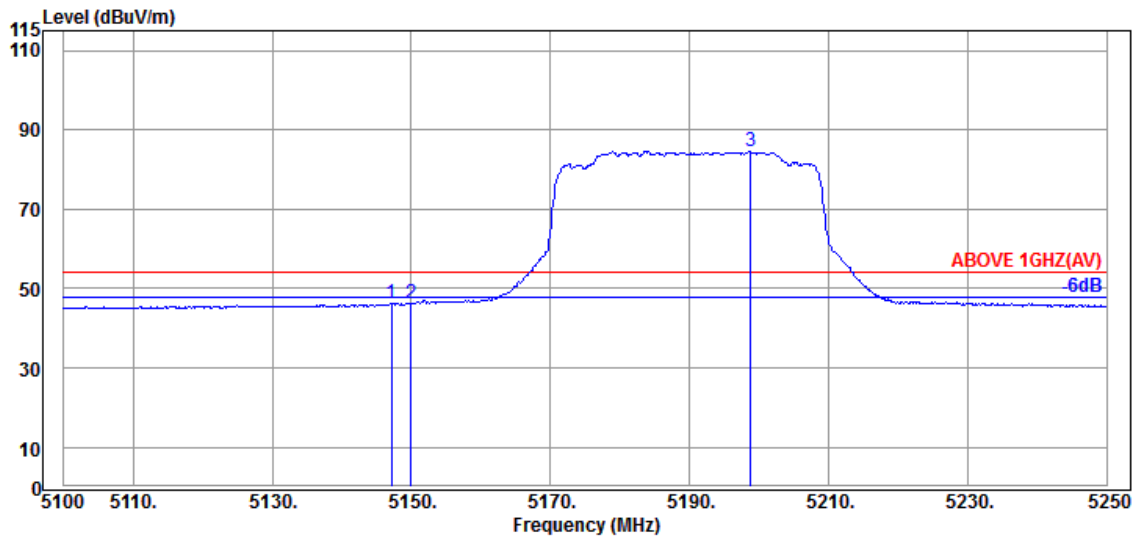


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5147.100 | 34.50 | 8.88 | 34.34 | 37.22 | 46.26 | 54.00 | 7.74 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 37.15 | 46.19 | 54.00 | 7.81 | Average |
| @ 5198.850 | 34.70 | 8.91 | 34.32 | 75.33 | 84.62 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| RU Configuration | 484/65 | Frequency | TX 5210MHz |

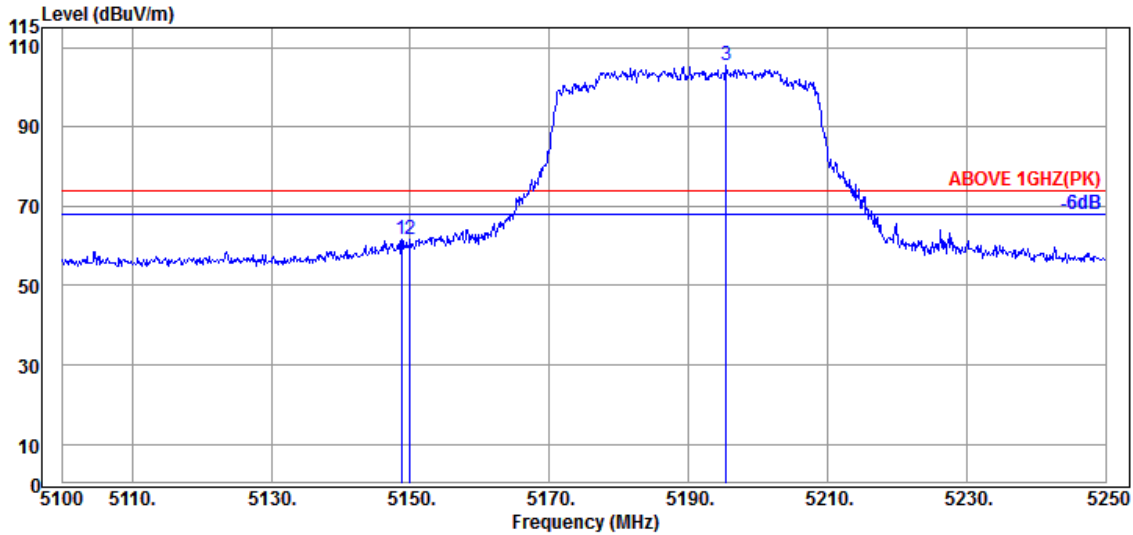

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5148.750 | 34.50 | 8.88 | 34.34 | 52.70 | 61.74 | 74.00 | 12.26 | Peak |
| 5149.950 | 34.50 | 8.88 | 34.34 | 52.71 | 61.75 | 74.00 | 12.25 | Peak |
| @ 5195.400 | 34.70 | 8.91 | 34.32 | 96.32 | 105.61 | --- | --- | Peak |

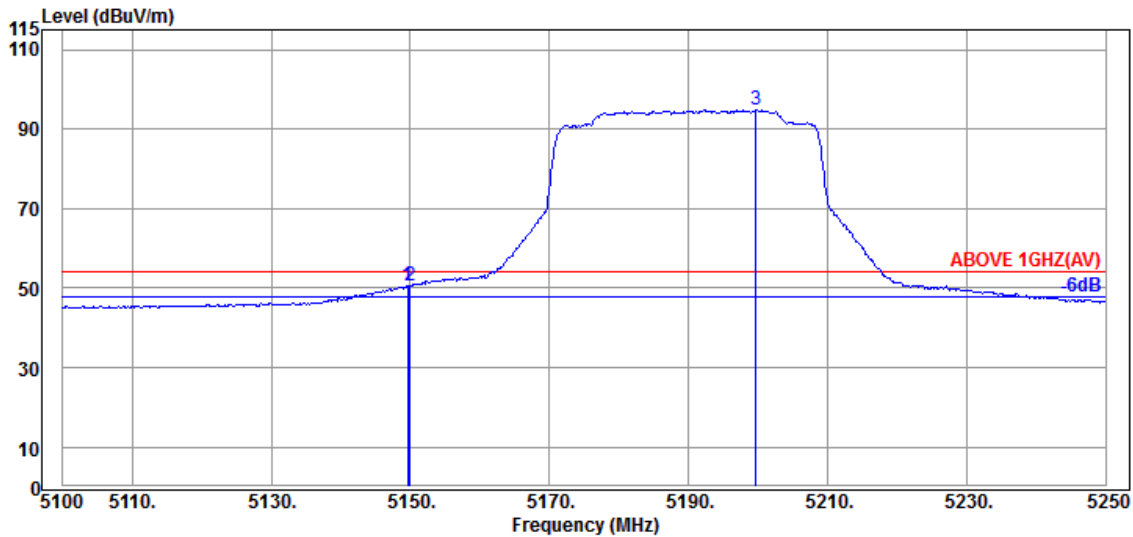


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5149.650 | 34.50 | 8.88 | 34.34 | 41.52 | 50.56 | 54.00 | 3.44 | Average |
| 5149.950 | 34.50 | 8.88 | 34.34 | 41.61 | 50.65 | 54.00 | 3.35 | Average |
| @ 5199.750 | 34.70 | 8.91 | 34.32 | 85.46 | 94.75 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| RU Configuration | 484/66 | Frequency | TX 5290MHz |

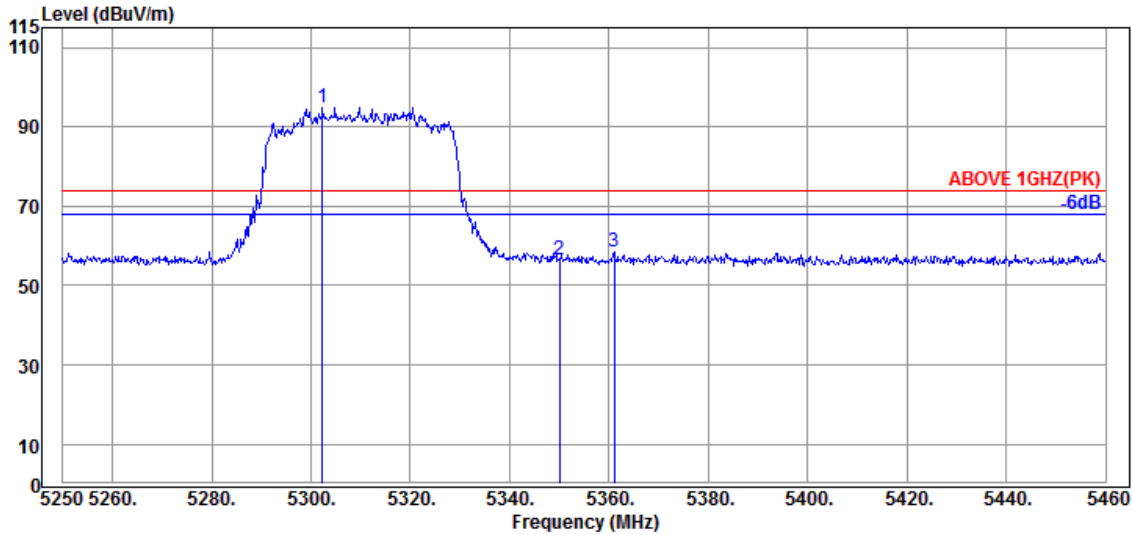

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.290 | 34.40 | 8.97 | 34.28 | 85.86 | 94.95 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 47.06 | 56.69 | 74.00 | 17.31 | Peak |
| 5361.090 | 34.87 | 9.00 | 34.26 | 48.82 | 58.43 | 74.00 | 15.57 | Peak |

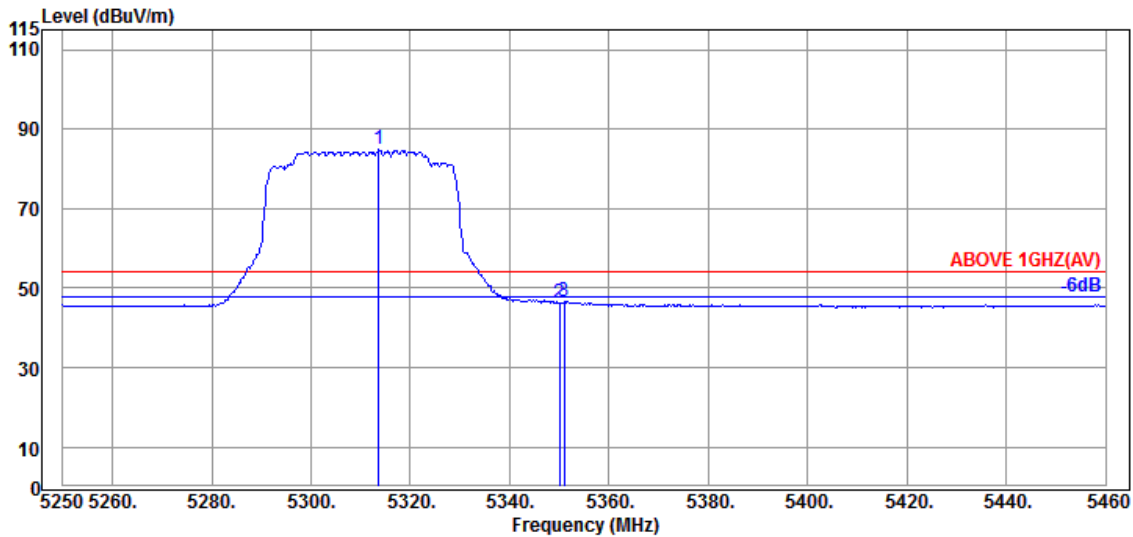


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5313.630 | 34.57 | 8.98 | 34.27 | 75.56 | 84.84 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 36.78 | 46.41 | 54.00 | 7.59 | Average |
| 5351.010 | 34.90 | 8.99 | 34.26 | 36.89 | 46.52 | 54.00 | 7.48 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| RU Configuration | 484/66 | Frequency | TX 5290MHz |

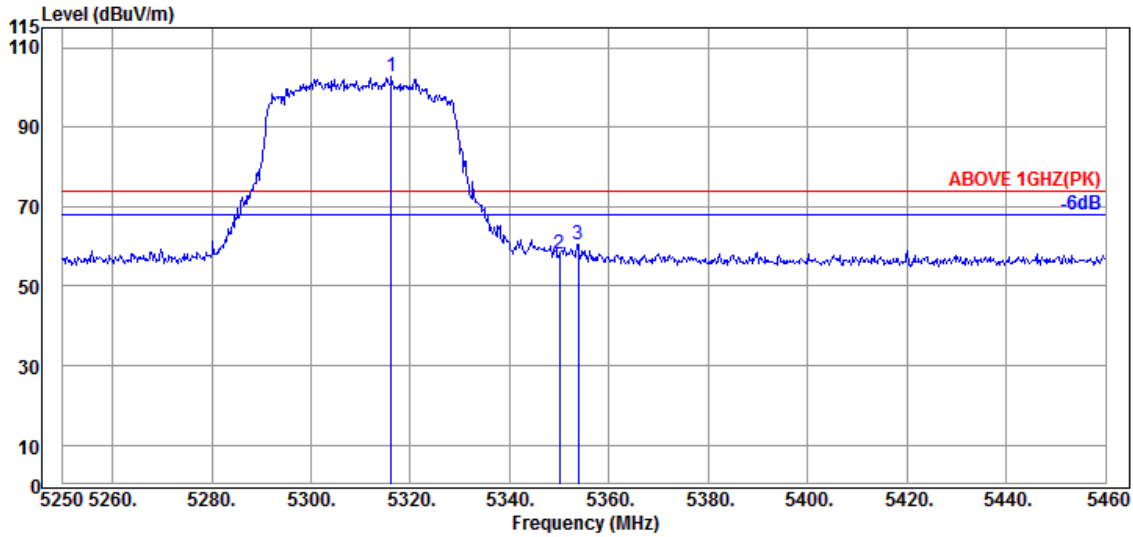

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5316.150 | 34.57 | 8.98 | 34.27 | 93.45 | 102.73 | --- | --- | Peak |
| 5349.960 | 34.90 | 8.99 | 34.26 | 48.47 | 58.10 | 74.00 | 15.90 | Peak |
| 5353.740 | 34.90 | 8.99 | 34.26 | 50.83 | 60.46 | 74.00 | 13.54 | Peak |

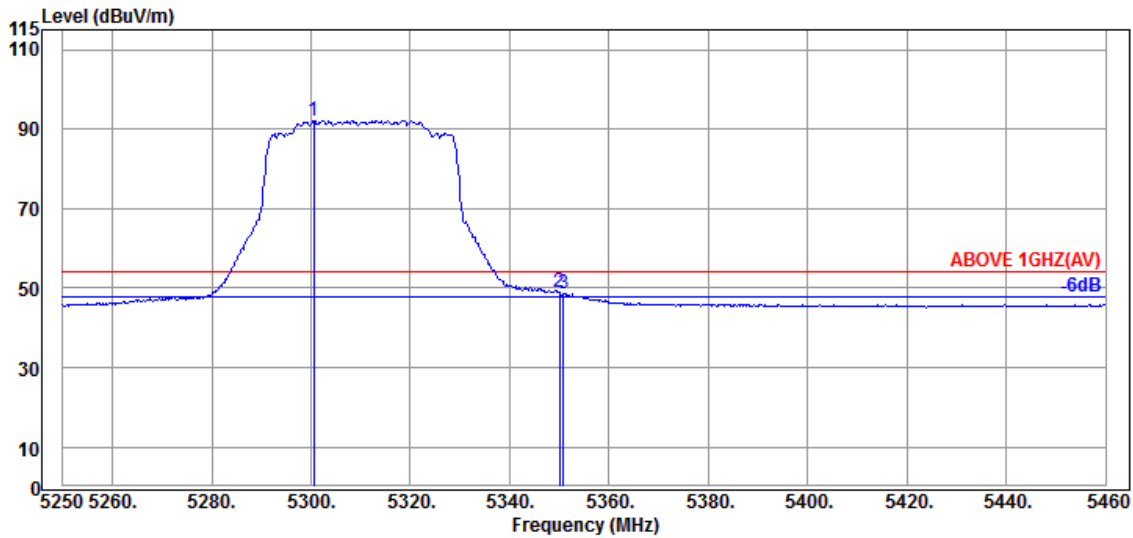


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5300.610 | 34.40 | 8.97 | 34.28 | 82.97 | 92.06 | --- | --- | Average |
| 5349.960 | 34.90 | 8.99 | 34.26 | 39.29 | 48.92 | 54.00 | 5.08 | Average |
| 5350.800 | 34.90 | 8.99 | 34.26 | 38.90 | 48.53 | 54.00 | 5.47 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

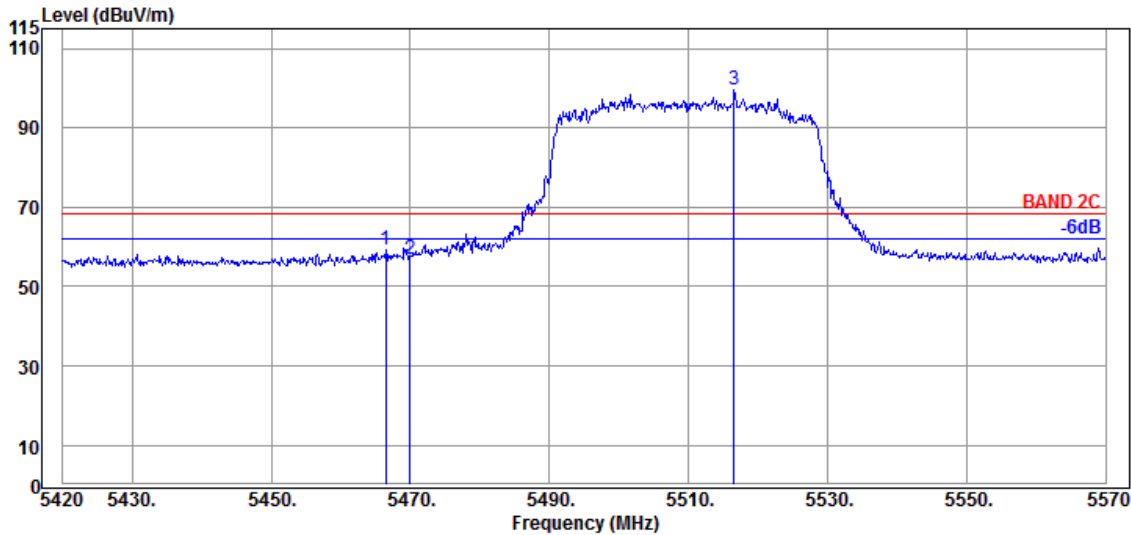

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.500 | 34.63 | 9.06 | 34.21 | 49.77 | 59.25 | 68.20 | 8.95 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 47.55 | 57.03 | 68.20 | 11.17 | Peak |
| @ 5516.600 | 34.70 | 9.09 | 34.21 | 89.98 | 99.56 | --- | --- | Peak |

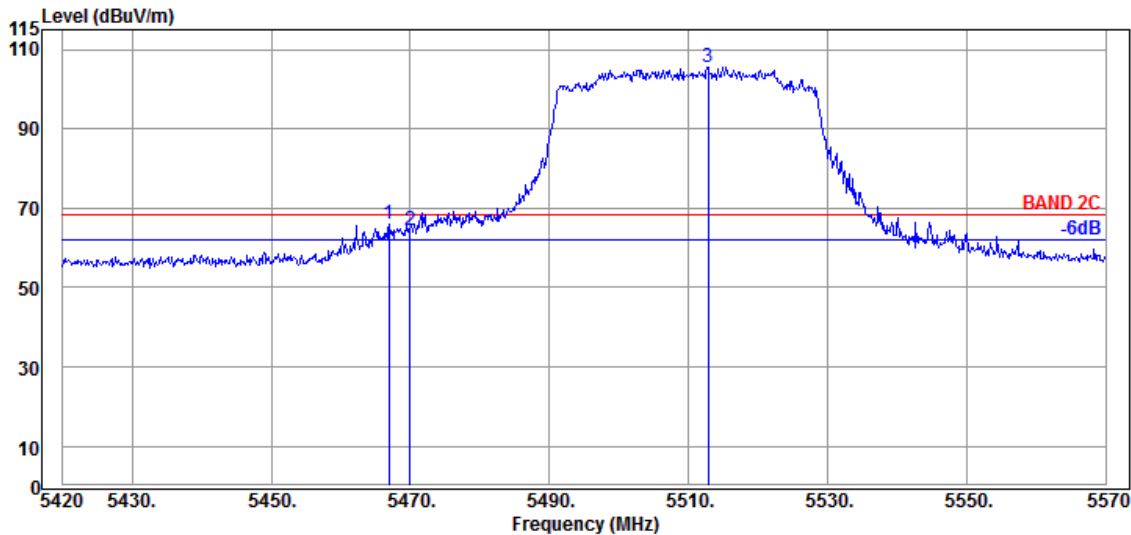


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5466.950 | 34.63 | 9.06 | 34.21 | 56.41 | 65.89 | 68.20 | 2.31 | Peak |
| 5469.950 | 34.63 | 9.06 | 34.21 | 55.06 | 64.54 | 68.20 | 3.66 | Peak |
| @ 5512.850 | 34.70 | 9.09 | 34.21 | 96.00 | 105.58 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

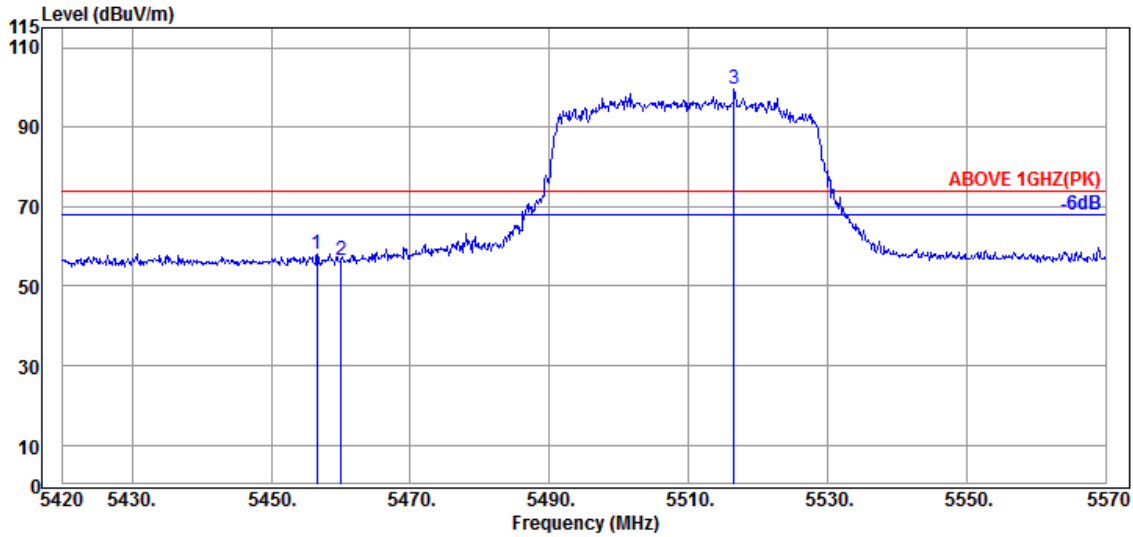

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5456.600 | 34.60 | 9.05 | 34.21 | 48.82 | 58.26 | 74.00 | 15.74 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 47.10 | 56.54 | 74.00 | 17.46 | Peak |
| @ 5516.600 | 34.70 | 9.09 | 34.21 | 89.98 | 99.56 | --- | --- | Peak |

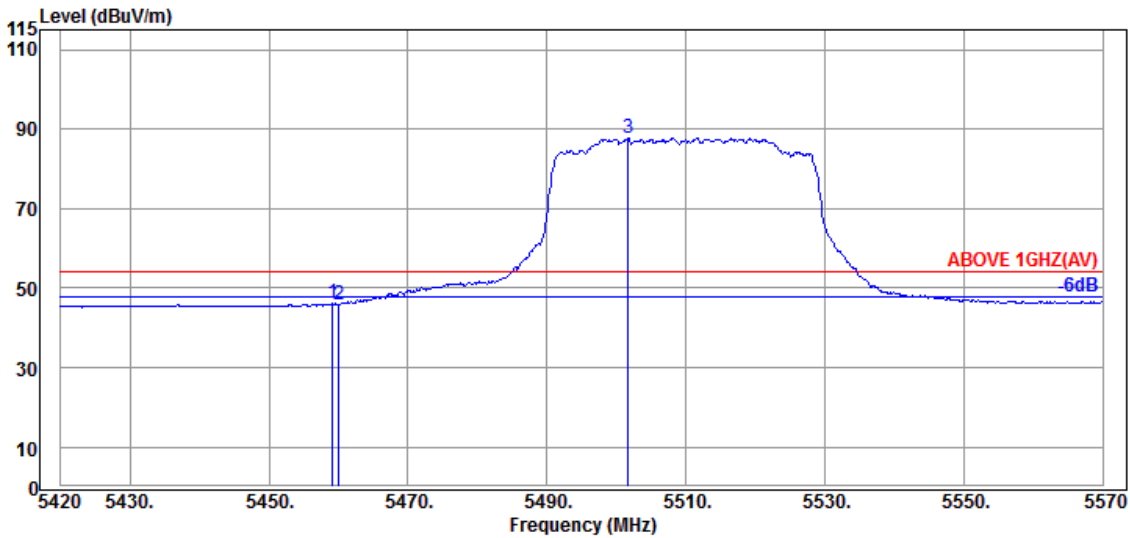


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.150 | 34.60 | 9.05 | 34.21 | 36.69 | 46.13 | 54.00 | 7.87 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 36.44 | 45.88 | 54.00 | 8.12 | Average |
| @ 5501.750 | 34.70 | 9.08 | 34.20 | 78.21 | 87.79 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/65 | Frequency | TX 5530MHz |

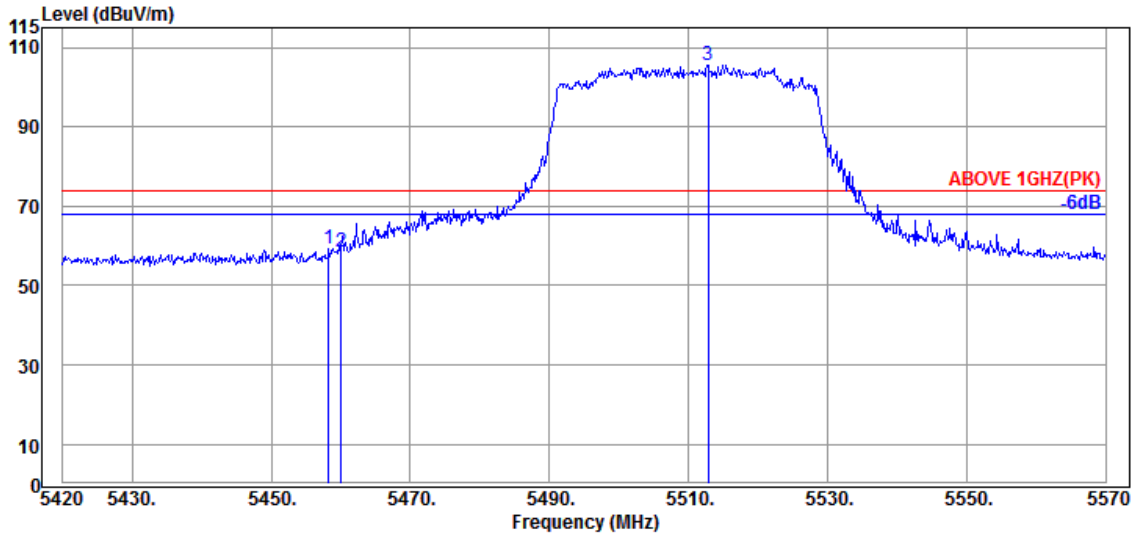

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5458.250 | 34.60 | 9.05 | 34.21 | 49.90 | 59.34 | 74.00 | 14.66 | Peak |
| 5460.050 | 34.60 | 9.05 | 34.21 | 49.21 | 58.65 | 74.00 | 15.35 | Peak |
| @ 5512.850 | 34.70 | 9.09 | 34.21 | 96.00 | 105.58 | --- | --- | Peak |

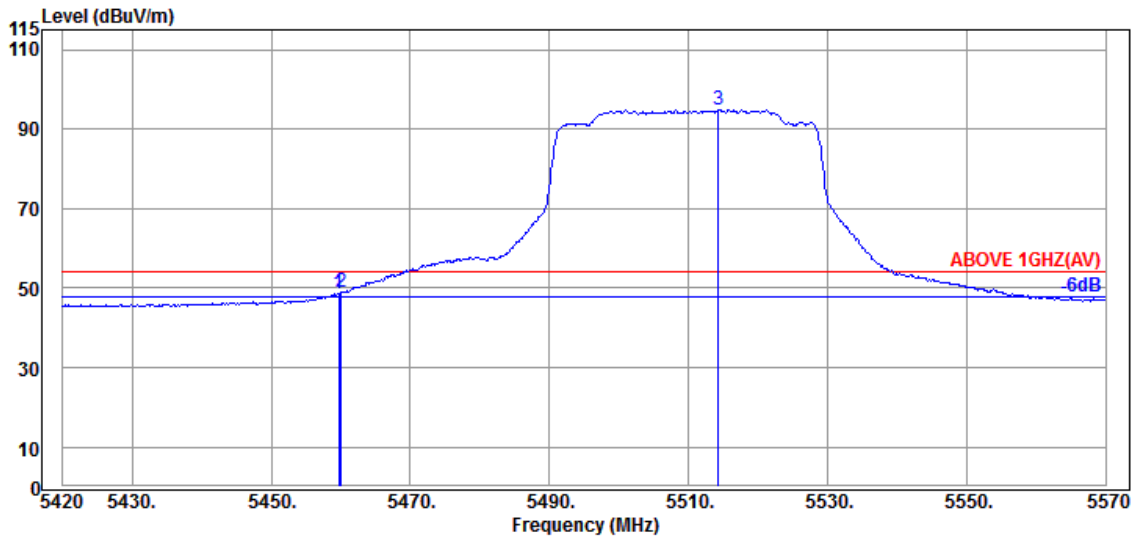


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.750 | 34.60 | 9.05 | 34.21 | 39.25 | 48.69 | 54.00 | 5.31 | Average |
| 5460.050 | 34.60 | 9.05 | 34.21 | 39.57 | 49.01 | 54.00 | 4.99 | Average |
| @ 5514.350 | 34.70 | 9.09 | 34.21 | 85.20 | 94.78 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| RU Configuration | 484/66 | Frequency | TX 5610MHz |

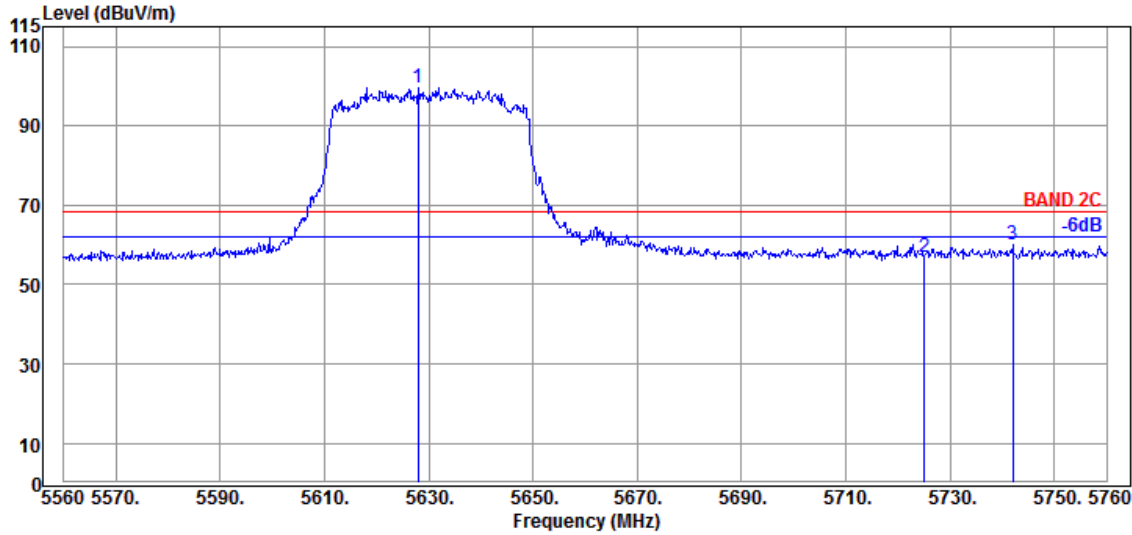

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5628.000 | 34.47 | 9.14 | 34.26 | 90.43 | 99.78 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 47.09 | 56.89 | 68.20 | 11.31 | Peak |
| 5742.000 | 35.00 | 9.20 | 34.31 | 50.08 | 59.97 | 68.20 | 8.23 | Peak |

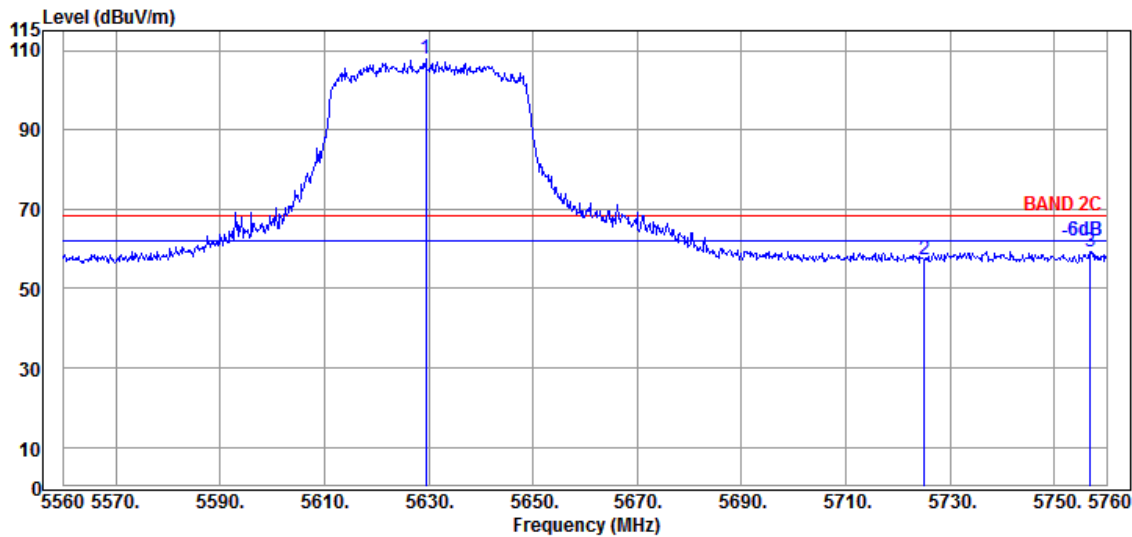


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5629.400 | 34.47 | 9.14 | 34.26 | 98.58 | 107.93 | --- | --- | Peak |
| 5725.000 | 34.90 | 9.20 | 34.30 | 47.42 | 57.22 | 68.20 | 10.98 | Peak |
| 5756.800 | 35.03 | 9.21 | 34.32 | 49.34 | 59.26 | 68.20 | 8.94 | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| RU Configuration | 484/65 | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

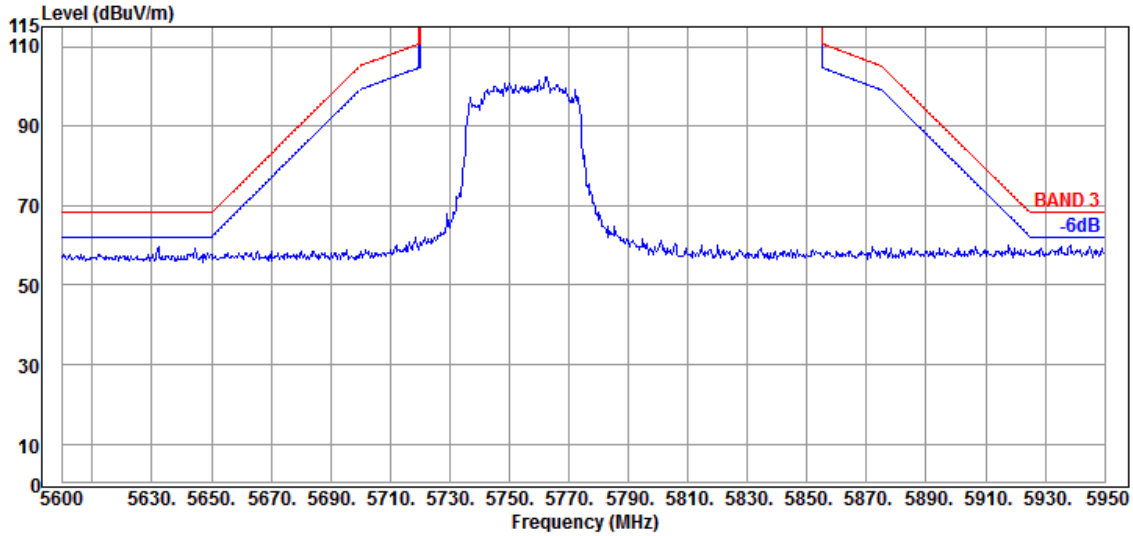


Antenna at Vertical Polarization

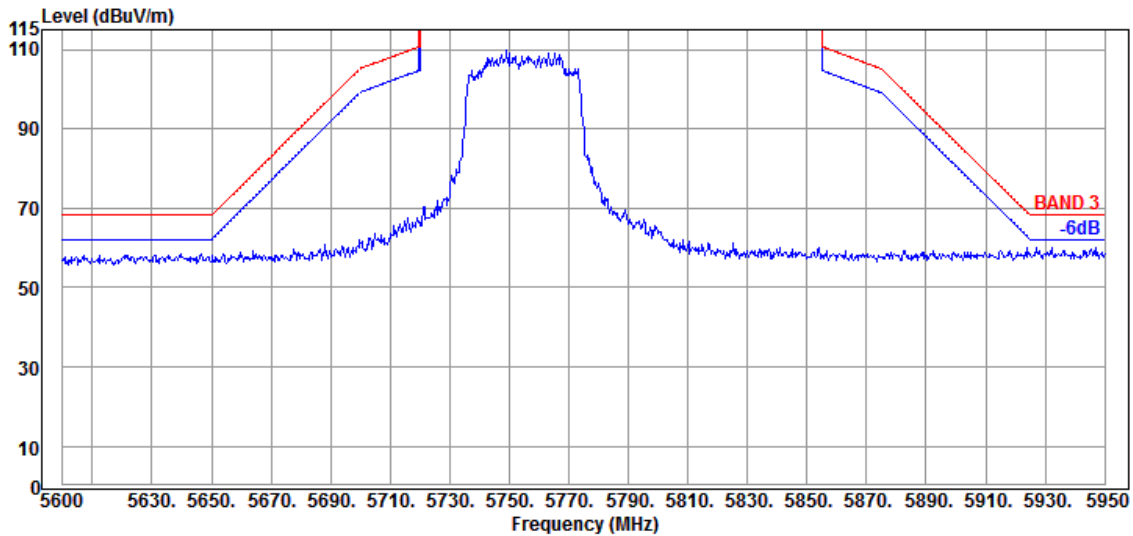


| | | | |
|------------------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| RU Configuration | 484/66 | Frequency | TX 5775MHz |


Antenna at Horizontal Polarization

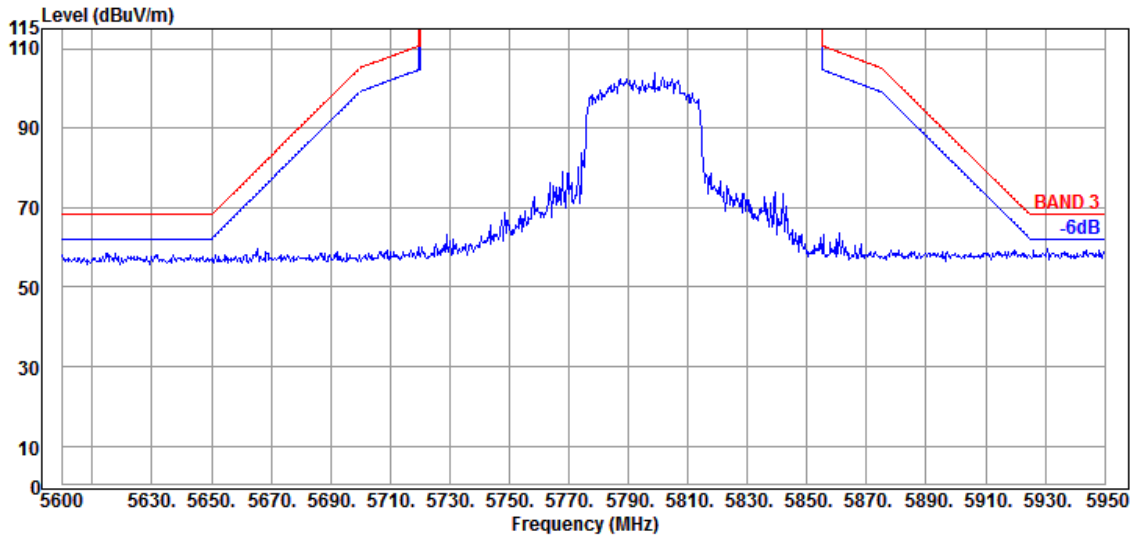

Antenna at Vertical Polarization

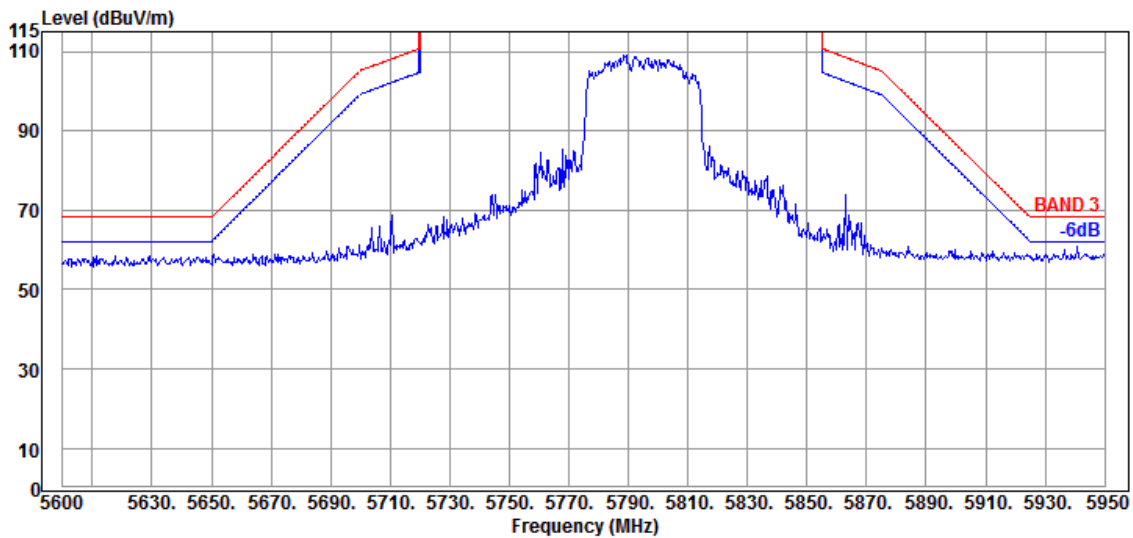


| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/67 | Frequency | TX 5250MHz |

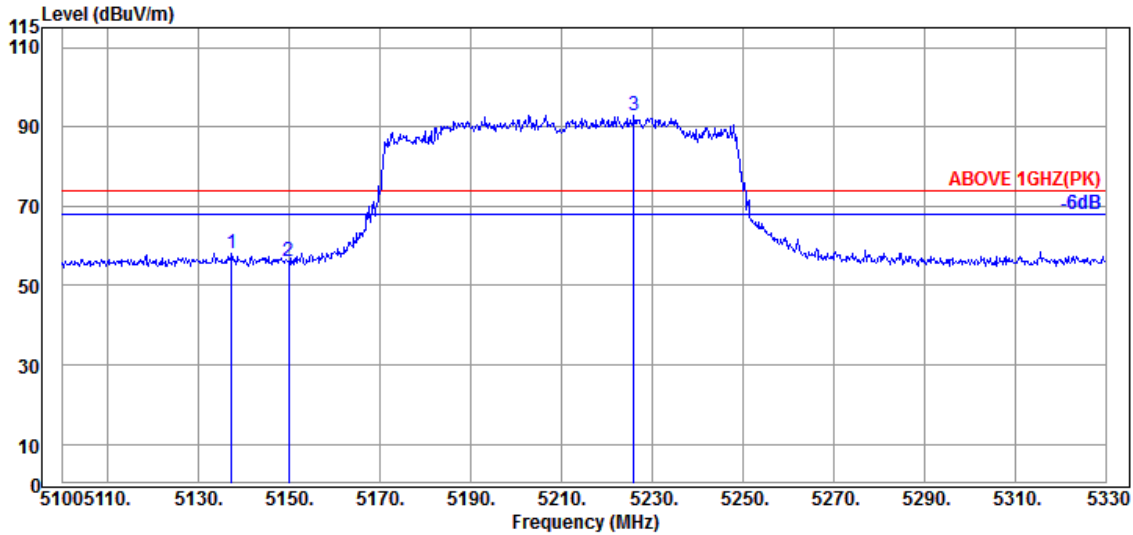

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5137.260 | 34.40 | 8.88 | 34.34 | 49.18 | 58.12 | 74.00 | 15.88 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 47.12 | 56.16 | 74.00 | 17.84 | Peak |
| @ 5226.040 | 34.60 | 8.93 | 34.30 | 83.60 | 92.83 | --- | --- | Peak |

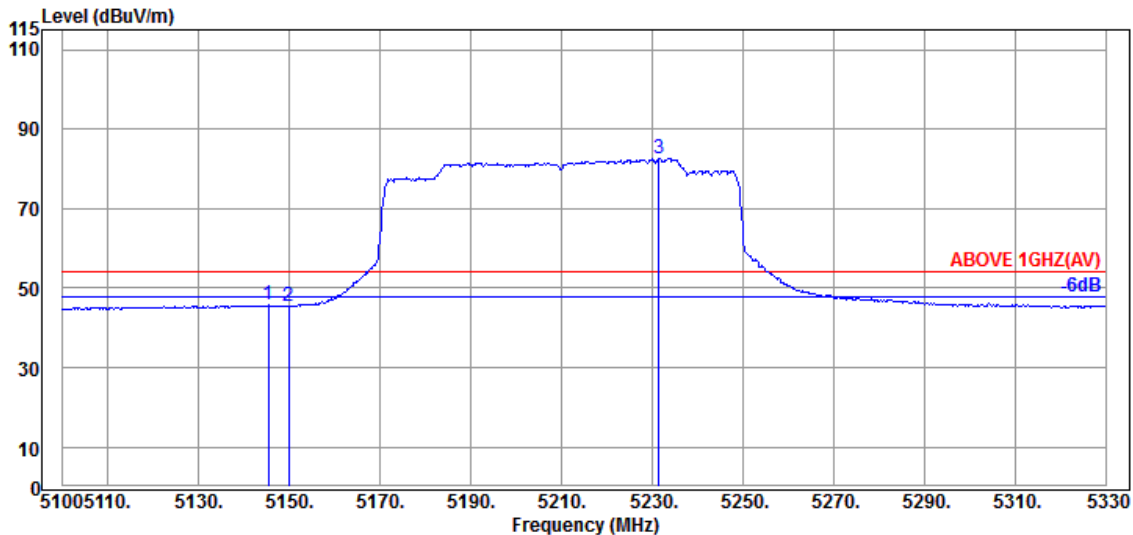


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.310 | 34.50 | 8.88 | 34.34 | 36.61 | 45.65 | 54.00 | 8.35 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 36.49 | 45.53 | 54.00 | 8.47 | Average |
| @ 5231.560 | 34.60 | 8.93 | 34.30 | 73.35 | 82.58 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/67 | Frequency | TX 5250MHz |

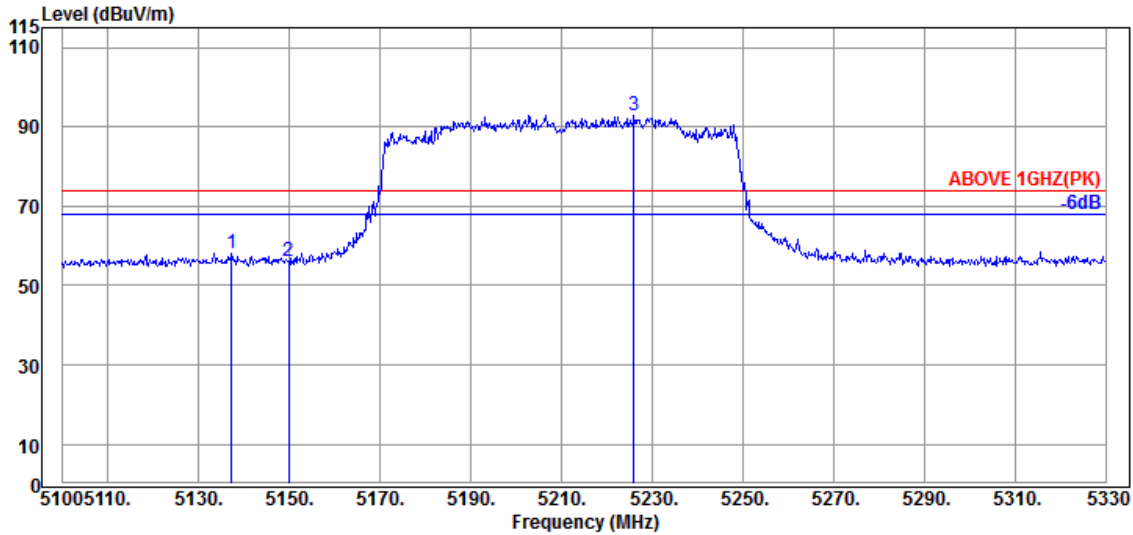

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5137.260 | 34.40 | 8.88 | 34.34 | 49.18 | 58.12 | 74.00 | 15.88 | Peak |
| 5149.910 | 34.50 | 8.88 | 34.34 | 47.12 | 56.16 | 74.00 | 17.84 | Peak |
| @ 5226.040 | 34.60 | 8.93 | 34.30 | 83.60 | 92.83 | --- | --- | Peak |

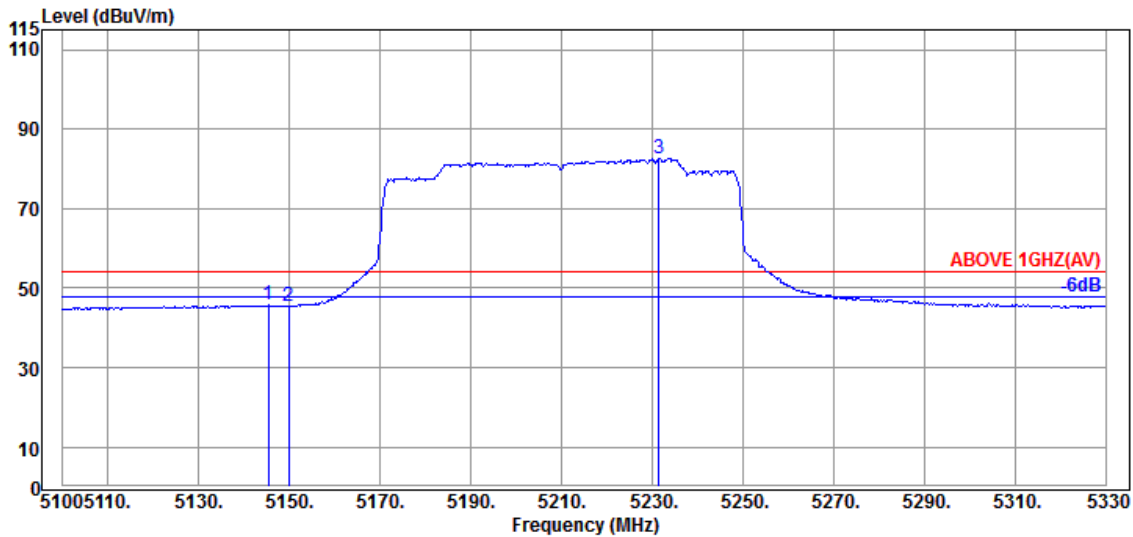


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5145.310 | 34.50 | 8.88 | 34.34 | 36.61 | 45.65 | 54.00 | 8.35 | Average |
| 5149.910 | 34.50 | 8.88 | 34.34 | 36.49 | 45.53 | 54.00 | 8.47 | Average |
| @ 5231.560 | 34.60 | 8.93 | 34.30 | 73.35 | 82.58 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/S67 | Frequency | TX 5250MHz |

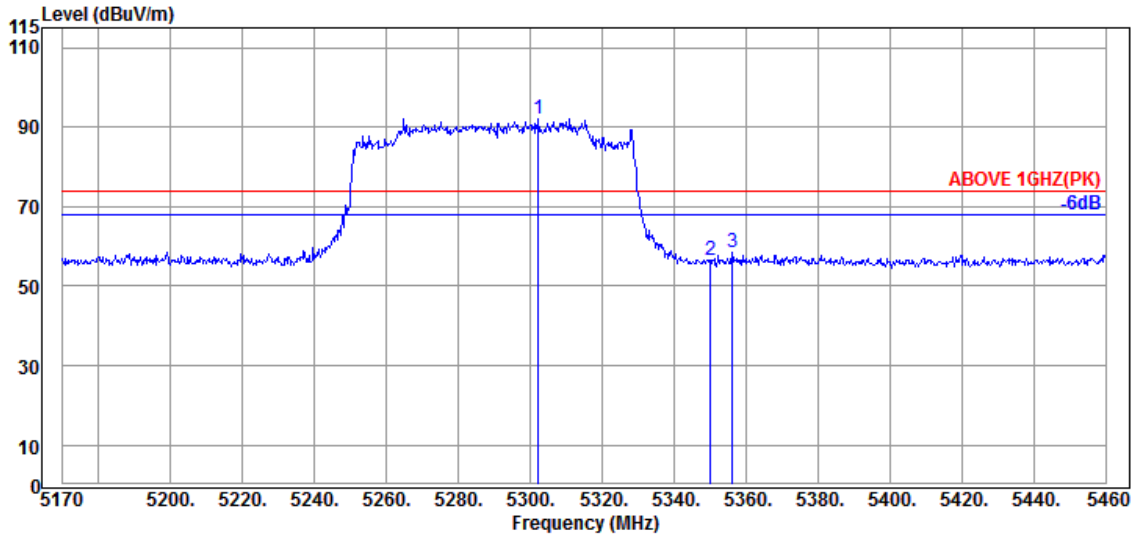

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5302.240 | 34.40 | 8.97 | 34.28 | 83.14 | 92.23 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 47.01 | 56.64 | 74.00 | 17.36 | Peak |
| 5356.180 | 34.87 | 9.00 | 34.26 | 48.84 | 58.45 | 74.00 | 15.55 | Peak |

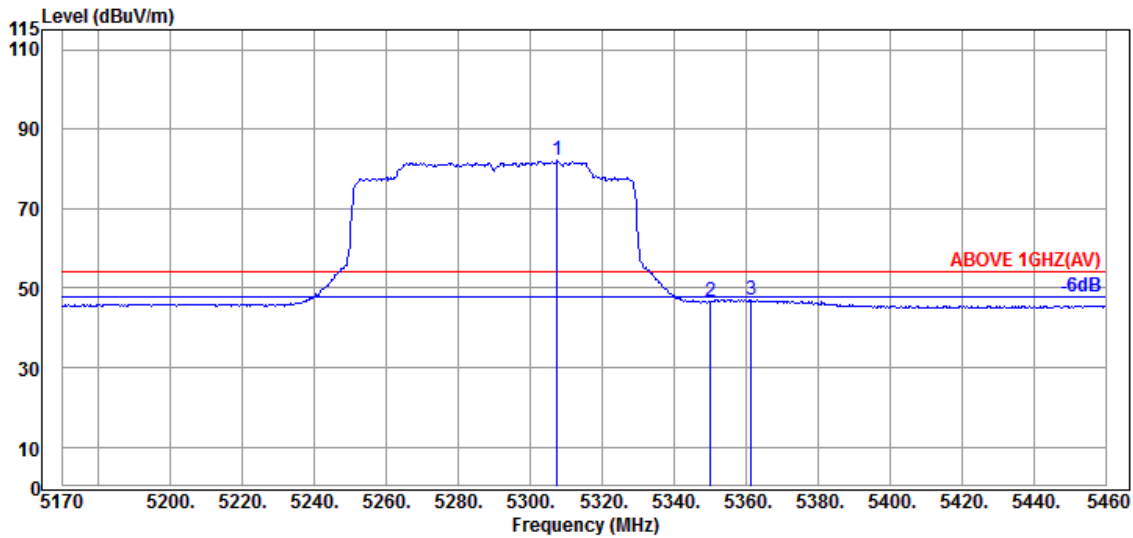


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5307.460 | 34.40 | 8.97 | 34.28 | 72.95 | 82.04 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 36.96 | 46.59 | 54.00 | 7.41 | Average |
| 5361.400 | 34.87 | 9.00 | 34.26 | 37.49 | 47.10 | 54.00 | 6.90 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1 & 2A |
| RU Configuration | 996/S67 | Frequency | TX 5250MHz |

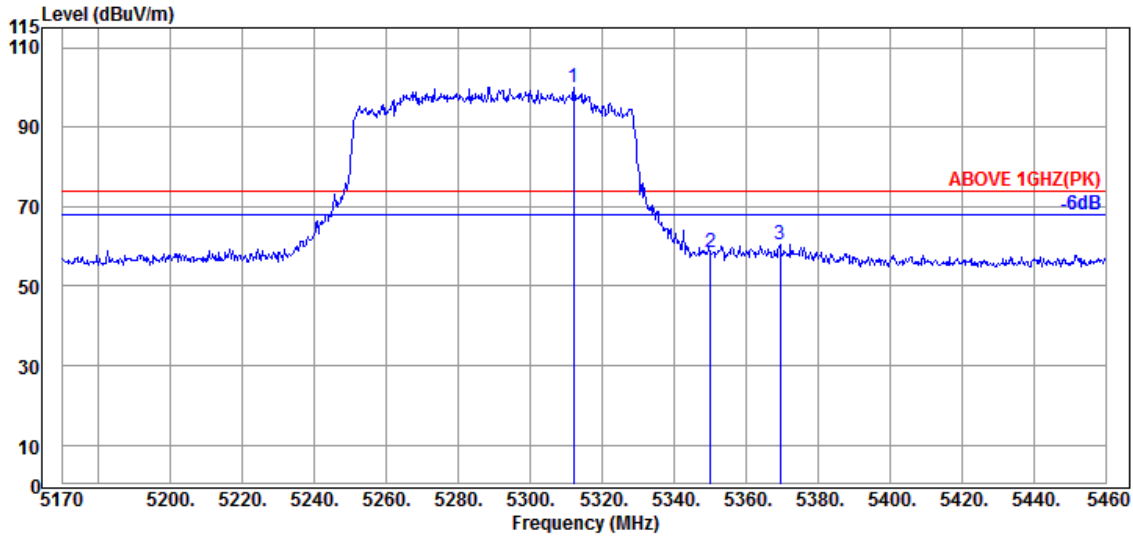

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5312.100 | 34.57 | 8.98 | 34.27 | 90.87 | 100.15 | --- | --- | Peak |
| 5350.090 | 34.90 | 8.99 | 34.26 | 48.95 | 58.58 | 74.00 | 15.42 | Peak |
| 5369.520 | 34.87 | 9.00 | 34.25 | 50.76 | 60.38 | 74.00 | 13.62 | Peak |

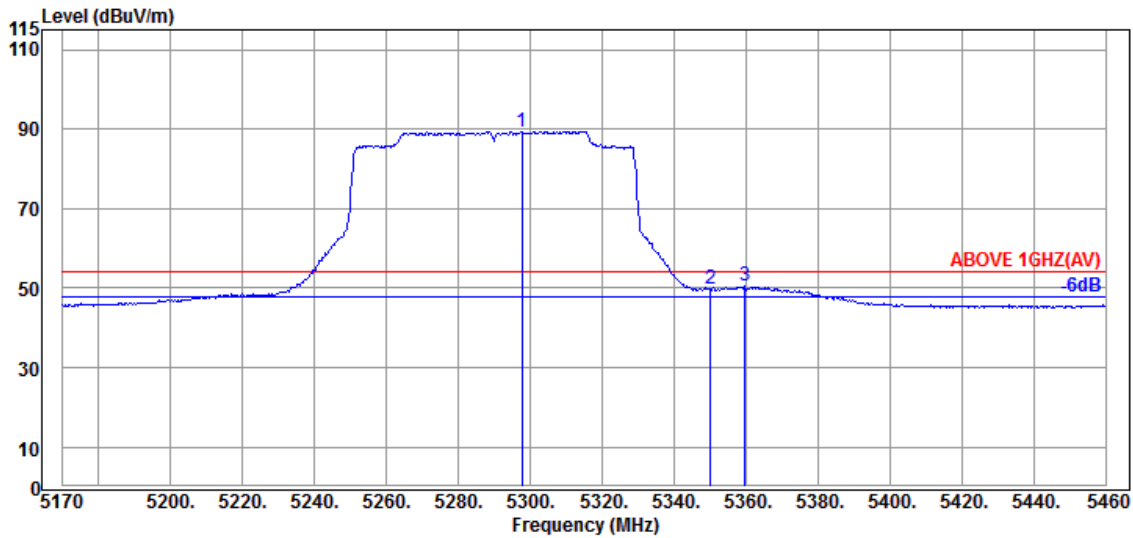


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5297.600 | 34.40 | 8.97 | 34.28 | 80.34 | 89.43 | --- | --- | Average |
| 5350.090 | 34.90 | 8.99 | 34.26 | 39.97 | 49.60 | 54.00 | 4.40 | Average |
| 5359.660 | 34.87 | 9.00 | 34.26 | 40.89 | 50.50 | 54.00 | 3.50 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/67 | Frequency | TX 5570MHz |

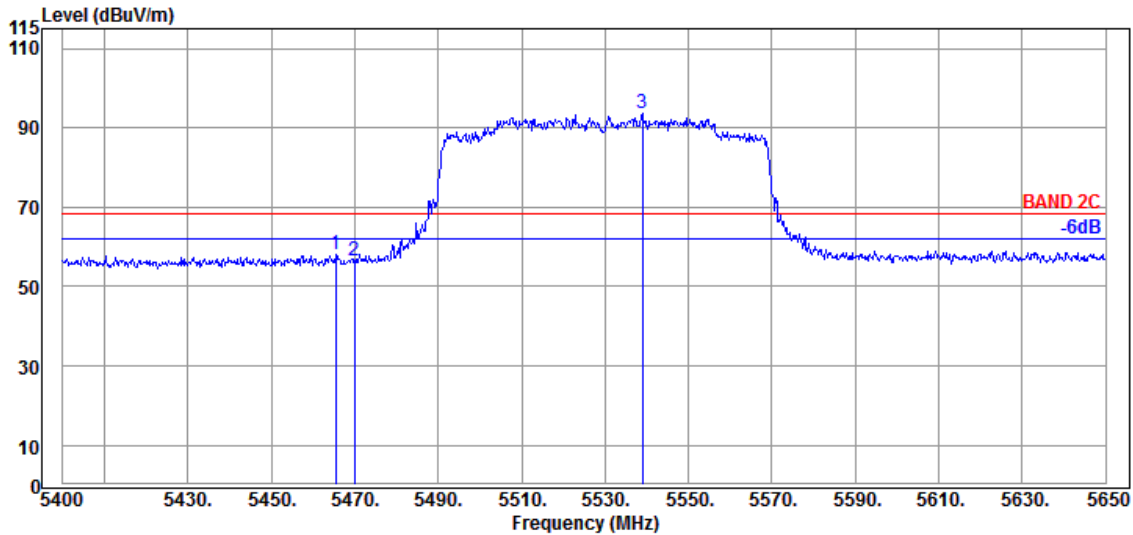

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5465.500 | 34.63 | 9.06 | 34.21 | 48.48 | 57.96 | 68.20 | 10.24 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 47.02 | 56.50 | 68.20 | 11.70 | Peak |
| @ 5539.000 | 34.70 | 9.09 | 34.22 | 84.26 | 93.83 | --- | --- | Peak |

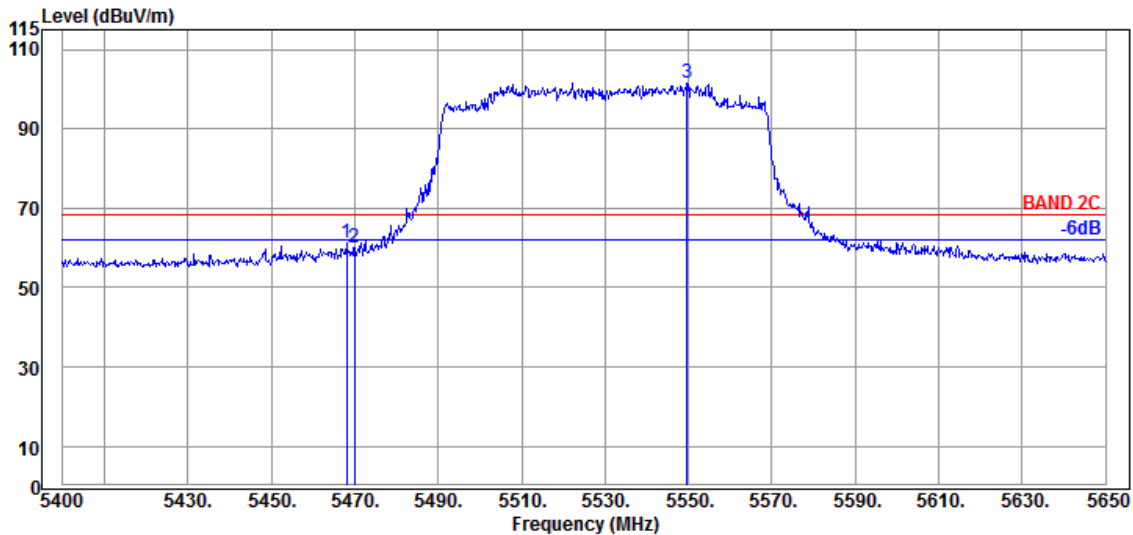


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5468.000 | 34.63 | 9.06 | 34.21 | 51.66 | 61.14 | 68.20 | 7.06 | Peak |
| 5470.000 | 34.63 | 9.06 | 34.21 | 50.44 | 59.92 | 68.20 | 8.28 | Peak |
| @ 5549.750 | 34.70 | 9.10 | 34.23 | 91.87 | 101.44 | --- | --- | Peak |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/67 | Frequency | TX 5570MHz |

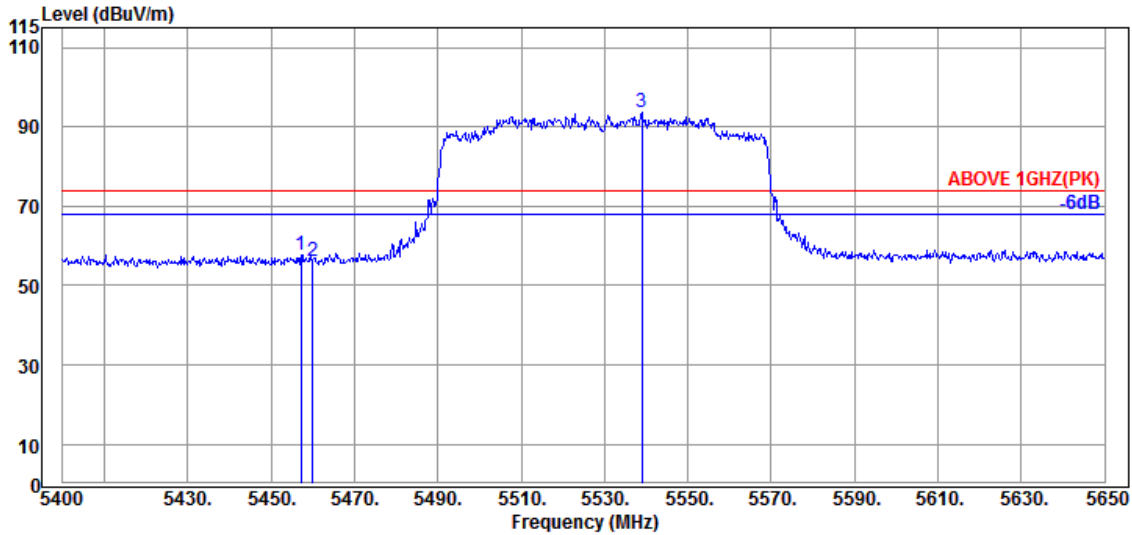

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5457.250 | 34.60 | 9.05 | 34.21 | 48.42 | 57.86 | 74.00 | 16.14 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 46.52 | 55.96 | 74.00 | 18.04 | Peak |
| @ 5539.000 | 34.70 | 9.09 | 34.22 | 84.26 | 93.83 | --- | --- | Peak |

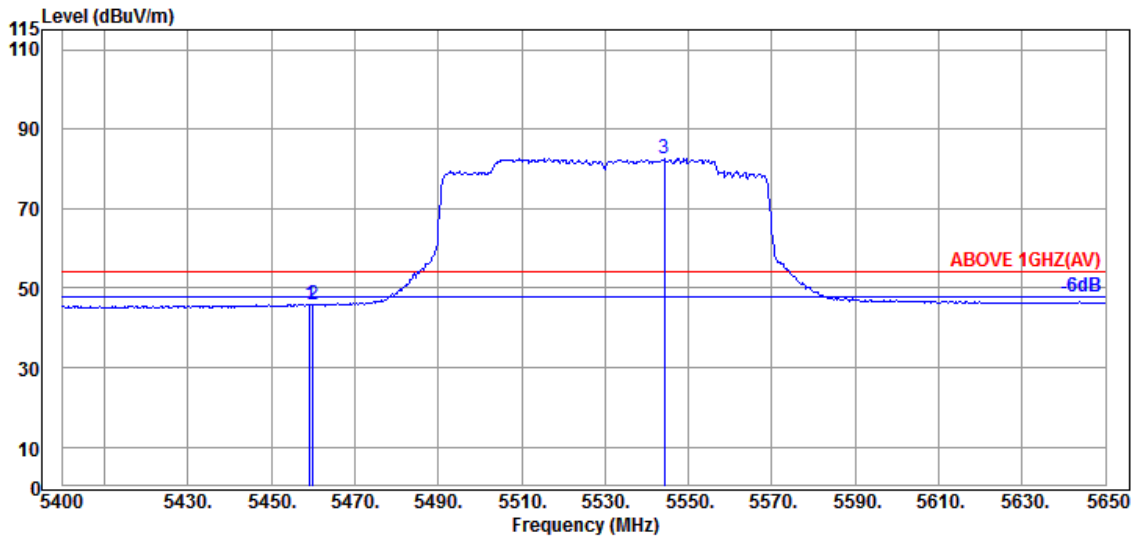


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.250 | 34.60 | 9.05 | 34.21 | 36.56 | 46.00 | 54.00 | 8.00 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 36.46 | 45.90 | 54.00 | 8.10 | Average |
| @ 5544.250 | 34.70 | 9.10 | 34.23 | 73.03 | 82.60 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/67 | Frequency | TX 5570MHz |

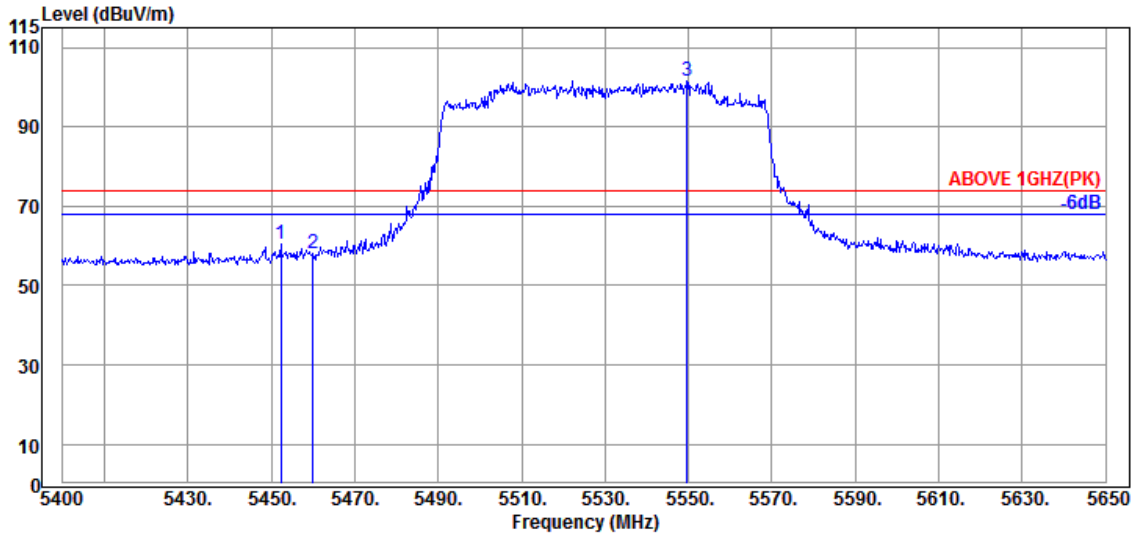

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5452.250 | 34.60 | 9.05 | 34.21 | 50.85 | 60.29 | 74.00 | 13.71 | Peak |
| 5460.000 | 34.60 | 9.05 | 34.21 | 48.69 | 58.13 | 74.00 | 15.87 | Peak |
| @ 5549.750 | 34.70 | 9.10 | 34.23 | 91.87 | 101.44 | --- | --- | Peak |

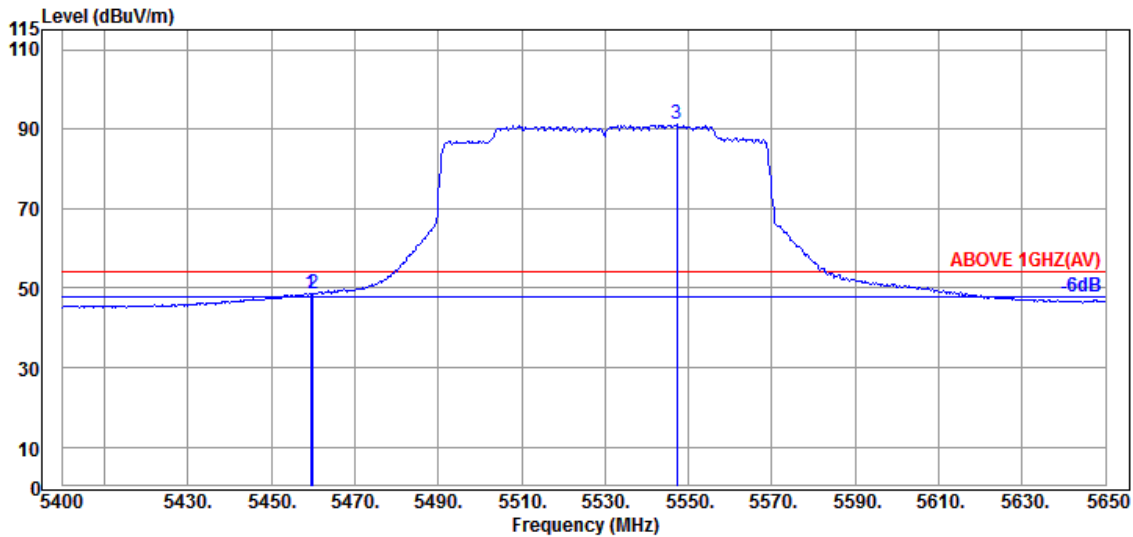


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 5459.500 | 34.60 | 9.05 | 34.21 | 39.17 | 48.61 | 54.00 | 5.39 | Average |
| 5460.000 | 34.60 | 9.05 | 34.21 | 39.32 | 48.76 | 54.00 | 5.24 | Average |
| @ 5547.250 | 34.70 | 9.10 | 34.23 | 81.52 | 91.09 | --- | --- | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------------------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| RU Configuration | 996/S67 | Frequency | TX 5570MHz |

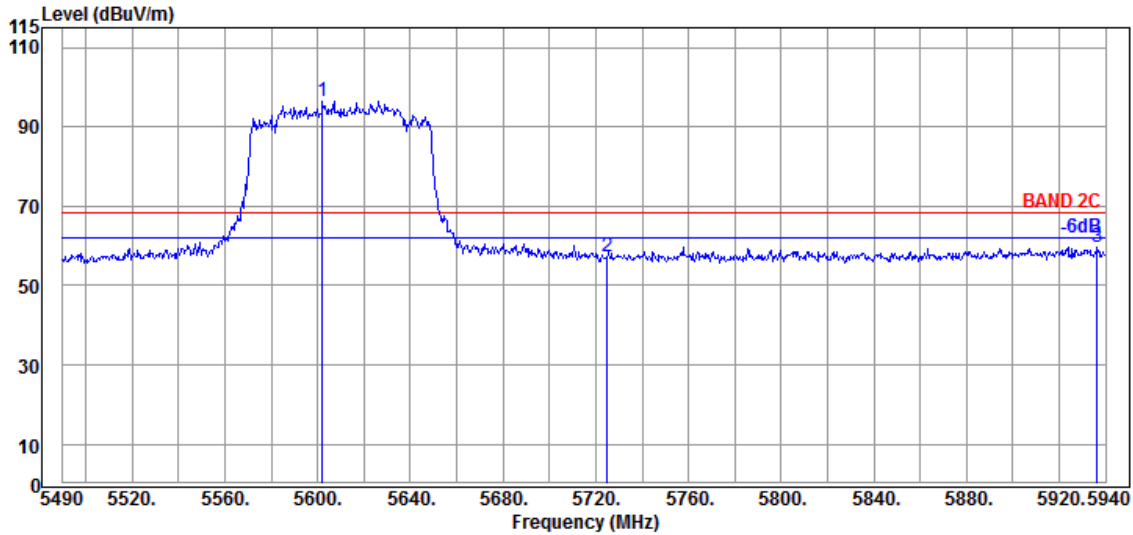

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5602.050 | 34.40 | 9.13 | 34.25 | 87.17 | 96.45 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 47.41 | 57.21 | 68.20 | 10.99 | Peak |
| 5936.400 | 35.73 | 9.30 | 34.40 | 49.18 | 59.81 | 68.20 | 8.39 | Peak |

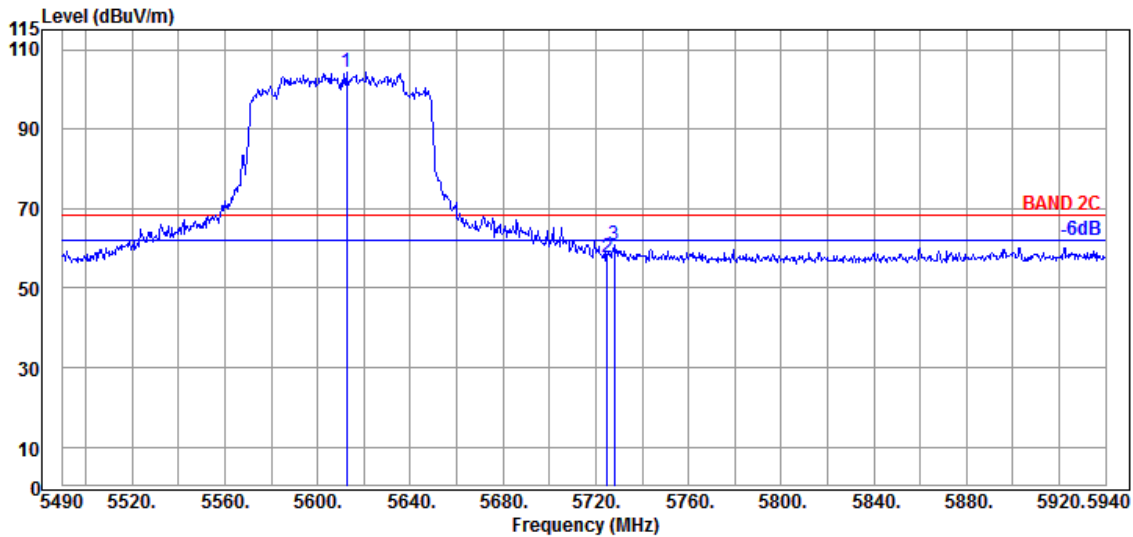

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 5612.400 | 34.43 | 9.14 | 34.25 | 95.04 | 104.36 | --- | --- | Peak |
| 5724.900 | 34.90 | 9.20 | 34.30 | 47.82 | 57.62 | 68.20 | 10.58 | Peak |
| 5728.050 | 34.90 | 9.20 | 34.31 | 51.01 | 60.80 | 68.20 | 7.40 | Peak |

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 1 |
| | | Frequency | TX 5200MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 37.60 | 12.61 | 34.79 | 32.72 | 48.14 | 54.00 | 5.86 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 37.60 | 12.61 | 34.79 | 34.21 | 49.63 | 54.00 | 4.37 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2A |
| | | Frequency | TX 5320MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 32.95 | 49.14 | 54.00 | 4.86 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 32.54 | 48.73 | 54.00 | 5.27 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C |
| | | Frequency | TX 5500MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11000.000 | 38.10 | 13.09 | 34.51 | 31.81 | 48.49 | 54.00 | 5.51 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11000.000 | 38.10 | 13.09 | 34.51 | 30.73 | 47.41 | 54.00 | 6.59 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 31.14 | 48.54 | 54.00 | 5.46 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 31.35 | 48.75 | 54.00 | 5.25 | Peak |

| | | | |
|------|---------|------------|------------|
| Mode | 802.11a | U-NII Band | 3 |
| | | Frequency | TX 5785MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 31.00 | 48.58 | 54.00 | 5.42 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 31.00 | 48.58 | 54.00 | 5.42 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 1 |
| | | Frequency | TX 5200MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10400.000 | 37.60 | 12.64 | 34.73 | 34.55 | 50.06 | 54.00 | 3.94 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10400.000 | 37.60 | 12.64 | 34.73 | 32.09 | 47.60 | 54.00 | 6.40 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2A |
| | | Frequency | TX 5320MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 31.92 | 48.11 | 54.00 | 5.89 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 31.76 | 47.95 | 54.00 | 6.05 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5700MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.30 | 13.51 | 34.52 | 30.89 | 48.18 | 54.00 | 5.82 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.30 | 13.51 | 34.52 | 30.68 | 47.97 | 54.00 | 6.03 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 30.37 | 47.77 | 54.00 | 6.23 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 30.88 | 48.28 | 54.00 | 5.72 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT20 | U-NII Band | 3 |
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 31.19 | 48.82 | 54.00 | 5.18 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11650.000 | 38.43 | 13.76 | 34.56 | 31.27 | 48.90 | 54.00 | 5.10 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 1 |
| | | Frequency | TX 5230MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 32.34 | 48.02 | 54.00 | 5.98 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 31.98 | 47.66 | 54.00 | 6.34 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2A |
| | | Frequency | TX 5270MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 32.01 | 47.96 | 54.00 | 6.04 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 32.39 | 48.34 | 54.00 | 5.66 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11020.000 | 38.10 | 13.09 | 34.51 | 31.82 | 48.50 | 54.00 | 5.50 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11020.000 | 38.10 | 13.09 | 34.51 | 31.52 | 48.20 | 54.00 | 5.80 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 30.44 | 47.84 | 54.00 | 6.16 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 30.88 | 48.28 | 54.00 | 5.72 | Peak |

| | | | |
|------|--------------|------------|------------|
| Mode | 802.11n-HT40 | U-NII Band | 3 |
| | | Frequency | TX 5795MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000 | 38.40 | 13.72 | 34.55 | 30.84 | 48.41 | 54.00 | 5.59 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000 | 38.40 | 13.72 | 34.55 | 30.93 | 48.50 | 54.00 | 5.50 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 31.61 | 47.19 | 54.00 | 6.81 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 34.63 | 50.21 | 54.00 | 3.79 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 31.70 | 47.72 | 54.00 | 6.28 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 32.67 | 48.69 | 54.00 | 5.31 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 30.15 | 47.14 | 54.00 | 6.86 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 30.24 | 47.23 | 54.00 | 6.77 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 30.74 | 48.00 | 54.00 | 6.00 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 30.46 | 47.72 | 54.00 | 6.28 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ac-VHT80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 30.97 | 48.55 | 54.00 | 5.45 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 31.16 | 48.74 | 54.00 | 5.26 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 32.18 | 48.07 | 54.00 | 5.93 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 31.69 | 47.58 | 54.00 | 6.42 | Peak |

| | | | |
|------|-----------------|------------|------------|
| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 30.21 | 47.06 | 54.00 | 6.94 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 30.43 | 47.28 | 54.00 | 6.72 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 1 |
| | | Frequency | TX 5180MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 37.60 | 12.61 | 34.79 | 32.61 | 48.03 | 54.00 | 5.97 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10360.000 | 37.60 | 12.61 | 34.79 | 32.77 | 48.19 | 54.00 | 5.81 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2A |
| | | Frequency | TX 5320MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 32.03 | 48.22 | 54.00 | 5.78 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10640.000 | 37.97 | 12.82 | 34.60 | 31.90 | 48.09 | 54.00 | 5.91 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5700MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.30 | 13.51 | 34.52 | 30.54 | 47.83 | 54.00 | 6.17 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11400.000 | 38.30 | 13.51 | 34.52 | 31.02 | 48.31 | 54.00 | 5.69 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 2C |
| | | Frequency | TX 5720MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 31.25 | 48.65 | 54.00 | 5.35 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11440.000 | 38.37 | 13.55 | 34.52 | 30.03 | 47.43 | 54.00 | 6.57 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE20 | U-NII Band | 3 |
| | | Frequency | TX 5785MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 30.86 | 48.44 | 54.00 | 5.56 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11570.000 | 38.43 | 13.69 | 34.54 | 31.20 | 48.78 | 54.00 | 5.22 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 1 |
| | | Frequency | TX 5230MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 32.35 | 48.03 | 54.00 | 5.97 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10460.000 | 37.70 | 12.68 | 34.70 | 31.84 | 47.52 | 54.00 | 6.48 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2A |
| | | Frequency | TX 5270MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 32.56 | 48.51 | 54.00 | 5.49 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10540.000 | 37.83 | 12.75 | 34.63 | 32.30 | 48.25 | 54.00 | 5.75 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5510MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11020.000 | 38.10 | 13.09 | 34.51 | 31.39 | 48.07 | 54.00 | 5.93 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11020.000 | 38.10 | 13.09 | 34.51 | 31.56 | 48.24 | 54.00 | 5.76 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 2C |
| | | Frequency | TX 5710MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 30.72 | 48.12 | 54.00 | 5.88 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11420.000 | 38.37 | 13.55 | 34.52 | 31.48 | 48.88 | 54.00 | 5.12 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE40 | U-NII Band | 3 |
| | | Frequency | TX 5795MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000 | 38.40 | 13.72 | 34.55 | 31.30 | 48.87 | 54.00 | 5.13 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11590.000 | 38.40 | 13.72 | 34.55 | 31.90 | 49.47 | 54.00 | 4.53 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 1 |
| | | Frequency | TX 5210MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 32.81 | 48.39 | 54.00 | 5.61 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10420.000 | 37.65 | 12.66 | 34.73 | 32.00 | 47.58 | 54.00 | 6.42 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2A |
| | | Frequency | TX 5290MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 30.76 | 46.78 | 54.00 | 7.22 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10580.000 | 37.87 | 12.77 | 34.62 | 30.75 | 46.77 | 54.00 | 7.23 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5610MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 29.83 | 46.82 | 54.00 | 7.18 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11220.000 | 38.20 | 13.30 | 34.51 | 30.03 | 47.02 | 54.00 | 6.98 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 2C |
| | | Frequency | TX 5690MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 29.08 | 46.34 | 54.00 | 7.66 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11380.000 | 38.30 | 13.48 | 34.52 | 29.57 | 46.83 | 54.00 | 7.17 | Peak |

| | | | |
|------|---------------|------------|------------|
| Mode | 802.11ax-HE80 | U-NII Band | 3 |
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 31.42 | 49.00 | 54.00 | 5.00 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11550.000 | 38.47 | 13.65 | 34.54 | 30.80 | 48.38 | 54.00 | 5.62 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 1/2A |
| | | Frequency | TX 5250MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 31.25 | 47.14 | 54.00 | 6.86 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 10500.000 | 37.80 | 12.73 | 34.64 | 32.06 | 47.95 | 54.00 | 6.05 | Peak |

| | | | |
|------|----------------|------------|------------|
| Mode | 802.11ax-HE160 | U-NII Band | 2C |
| | | Frequency | TX 5570MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 31.39 | 48.24 | 54.00 | 5.76 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 11140.000 | 38.13 | 13.23 | 34.51 | 30.75 | 47.60 | 54.00 | 6.40 | Peak |

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.