

FCC 15.407 WLAN 6GHz Test Report


for

LG Electronics Inc.

**222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,
17709 Republic of Korea**

Product Name : Notebook Computer
Model Name : (1)16Z90TL (2)16ZB90TL
(3)16ZD90TL (4)16ZG90TL
Brand : LG
FCC ID : BEJNT-16Z90TL

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT.....	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Reference Test Guidance.....	9
3.4. Antenna Information	10
3.5. EUT Specifications Assessed in Current Report	11
3.6. Description of Key Components	14
3.7. Test Configuration	16
3.8. Output Power Setting	35
3.9. Tested Supporting System List.....	38
3.10. Setup Configuration.....	38
3.11. Operating Condition of EUT	39
3.12. Description of Test Facility	39
3.13. Measurement Uncertainty	40
4. MEASUREMENT EQUIPMENTLIST.....	41
4.1. Conducted Emission Measurement	41
4.2. Radiated Emission Measurement	42
4.3. RF Conducted Measurement	43
4.4. Contention Based Protocol Measurement	43
5. CONDUCTED EMISSION.....	44
5.1. Block Diagram of Test Setup	44
5.2. Conducted Emission Limit	44
5.3. Test Procedure	44
5.4. Test Results	44
6. RADIATED EMISSION	45
6.1. Block Diagram of Test Setup	45
6.2. Radiated Emission Limits.....	47
6.3. Test Procedure	48
6.4. Measurement Result Explanation.....	50
6.5. Test Results	50
7. MAXIMUM POWER SPECTRAL DENSITY.....	51
7.1. Block Diagram of Test Setup	51
7.2. Specification Limits.....	51
7.3. Test Procedure	51
7.4. Test Results	51
8. MAXIMUM CONDUCTED OUTPUT POWER	52
8.1. Block Diagram of Test Setup	52
8.2. Specification Limits.....	52
8.3. Test Procedure	53
8.4. Test Results	53
9. EMISSION/OCCUPIED BANDWIDTH.....	54

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

9.1. Block Diagram of Test Setup	54
9.2. Specification Limits.....	54
9.3. Test Procedure	54
9.4. Test Results	54
10. UNDERSIRABLE EMISSIONS LIMITS: SPURIOUS EMISSION (CONDUCTED)	55
10.1. Block Diagram of Test Setup	55
10.2. Spurious Emission Specification Limits.....	55
10.3. Test Procedure	55
10.4. Test Results	55
11. IN-BAND EMISSION (CHANNEL MASK).....	56
11.1. Block Diagram of Test Setup	56
11.2. Specification Limits.....	56
11.3. Test Procedure	56
11.4. Test Results	57
12. CONTENTION BASED PROTOCOL	58
12.1. Block Diagram of Test Setup	58
12.2. Specification Limits.....	58
12.3. Test Procedure	60
12.4. Test Results	60
13. DEVIATION TO TEST SPECIFICATIONS	61

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory : LG Electronics Nanjing New Technology Co., Ltd.
EUT Description
(1) Product : Notebook Computer
(2) Model : (1)16Z90TL (2)16ZB90TL (3)16ZD90TL (4)16ZG90TL
(3) Brand : LG
(4) Power Supply: DC 20V, 3.25A

Applicable Standards:


Title 47 FCC CFR Part 15 Subpart E

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2024. 12. 26

Reviewed by:  (Tina Huang/Deputy Manager)

Approved by:  (Johnny Hsueh/Section Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2024. 12. 26	Original Report	EM-F240615

2. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Description	Results
15.207	Conducted Emission	PASS
15.205/15.209 15.407 (b)(6)	Radiated Band Edge and Radiated Spurious Emission	PASS
15.407(a)(8)	Maximum Power Spectral Density	PASS
15.407(a)(8)	Maximum Conducted Output Power	PASS
2.1049 15.407(a)(10)	Emission/Occupied Bandwidth	PASS
15.407(b)(6)	Undesirable emission limits: Spurious Emission (Conducted)	PASS
15.407(b)(7)	In-Band Emission (Channel Mask)	PASS
15.407(d)(6)	Contention Based Protocol	PASS
15.203	Antenna Requirement	PASS
Note: The uncertainties value is not used in determining the result.		

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Product	Notebook Computer
Model	(1)16Z90TL (2)16ZB90TL (3)16ZD90TL (4)16ZG90TL The difference between all models is different in the sales customers and color difference.
Brand	LG

3.2. Description of EUT

Test Model	16Z90TL			
Serial Number	N/A			
Power Rating	DC 20V, 3.25A			
Software Version	XY (X, Y can be 0 to 9 for different SW version not influence RF parameter)			
RF Features	WLAN:802.11 a/b/g/n/ac/ax/be Bluetooth: BT and BLE (BT5.4)			
Transmit Type	2.4 GHz			
	802.11b	1T1R		
	802.11g	1T1R		
	802.11n-HT20/40	2T2R		
	802.11ax-HE20/40	2T2R		
	802.11be-EHT20/40	2T2R		
	BT/BLE	1T1R		
	U-NII Bands			
	802.11a	1T1R		
	802.11n-HT20/40	2T2R		
	802.11ac-VHT20/40/80/160	2T2R		
	802.11ax-HE20/40/80/160	2T2R		
	802.11be-EHT20/40/80/160	2T2R		
	WLAN 6E Bands			
	802.11ax-HE20/40/80/160	2T2R		
	802.11be-EHT20/40/80/160/320	2T2R		
	The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).			
	Device Category	☐ standard power access point and fixed client device ☐ indoor access point ☐ subordinate device operating under the control of an indoor access point ☐ client devices, except for fixed client devices, operating under the control of a standard power access point ☒ client devices operating under the control of an indoor access point		
	Test Sample	Sample No.	Test Item	Firmware
		01	AC Conduction, RSE, RF Conducted	N/A
03		AC Conduction, RSE	N/A	
Sample Status	Trial sample			

Date of Receipt	2024. 11. 07
Date of Test	2024. 11. 14 ~ 12.13
Interface Ports of EUT	• One HDMI Port • Two USB Type C Ports • One Earphone Port • Two USB 3.0 Ports • One SD Card Slot
Accessories Supplied	• AC Adapter • USB C Cable • LAN Gender

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.

3.3. Reference Test Guidance

ANSI C63.10:2013

KDB 789033 D02 v02r01, KDB 662911 D01 v02r01, KDB 987594 D02 v02r01

3.4. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
					Main	AUX
1.	WA-P-LELE-04-070	INPAQ	Mono-Pole	2400~2500	2.1	2.5
				5150~5350	1.5	0.8
				5470~5725	0.9	1.1
				5725~5850	1.8	1.5
				5850~5900	1.8	1.7
				5925~6425	1.7	1.9
				6425~6525	0.9	1.4
				6525~6875	1.5	2.0
				6875~7125	1.4	1.8
According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then						
Directional gain = 10 log[(10 ^{G¹/10} + 10 ^{G²/10} + ... + 10 ^{G^N/10})/N _{ANT}] dBi						
Note 1. 2.4G: Directional gain =						
2400~2500MHz: Directional gain = 10 log[(10 ^{2.1/10} +10 ^{2.5/10})/2]= 2.30dBi						
Note 2. 5G: Directional gain =						
5150 ~ 5350MHz: = 10 log[(10 ^{1.5/10} +10 ^{0.8/10})/2]= 1.16dBi						
5850~5900MHz: = 10 log[(10 ^{1.8/10} +10 ^{1.7/10})/2]= 1.75dB						
Note 3. UNII Band (WLAN 6G):						
5925~6425MHz: Directional gain = 10 log[(10 ^{1.7/10} +10 ^{1.9/10})/2]= 1.80dBi						
6425~6525MHz: Directional gain = 10 log[(10 ^{0.9/10} +10 ^{1.4/10})/2]= 1.16dBi						
6525~6875MHz: Directional gain = 10 log[(10 ^{1.5/10} +10 ^{2.0/10})/2]= 1.76dBi						
6875~7125MHz: Directional gain = 10 log[(10 ^{1.4/10} +10 ^{1.8/10})/2]= 1.60dBi						

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
					Main	AUX
2.	L1LRF017-CS-H	LUXSHARE-ICT	Mono-Pole	2400~2500	5.2	5.3
				5150~5350	3.0	5.8
				5470~5725	4.1	5.0
				5725~5850	2.7	4.5
				5850~5925	3.8	4.5
				5925~6425	4.9	4.3
				6425~6525	1.6	3.0
				6525~6825	1.8	3.0
				6825~7125	2.8	2.2
According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then						
Directional gain = 10 log[(10 ^{G1/10} + 10 ^{G2/10} + ... + 10 ^{GN/10})/N _{ANT}] dBi						
Note 1. 2.4G: Directional gain =						
2400~2500MHz: Directional gain = 10 log[(10 ^{5.2/10} +10 ^{5.3/10})/2]= 5.25dBi						
Note 2. 5G: Directional gain =						
5150~5350MHz: = 10 log[(10 ^{3.1/10} +10 ^{5.8/10})/2]= 4.62dBi						
5850~5925MHz: = 10 log[(10 ^{3.8/10} +10 ^{4.5/10})/2]= 4.16dBi						
Note 3. UNII Band (WLAN 6G):						
5925~6425MHz: Directional gain = 10 log[(10 ^{4.9/10} +10 ^{4.3/10})/2]= 4.61dBi						
6425~6525MHz: Directional gain = 10 log[(10 ^{1.6/10} +10 ^{3.0/10})/2]= 2.36dBi						
6525~6825MHz: Directional gain = 10 log[(10 ^{1.8/10} +10 ^{3.0/10})/2]= 2.44dBi						
6875~7125MHz: Directional gain = 10 log[(10 ^{2.8/10} +10 ^{2.2/10})/2]= 2.51dBi						

3.5. EUT Specifications Assessed in Current Report

Mode	U-NII Band	Fundamental Range (MHz)	Channel Number
802.11ax-HE20 802.11be-EHT20	5	5955-6415	24
	6	6435-6515	5
	7	6535-6855	17
	8	6875-7115	13
802.11ax-HE40 802.11be-EHT40	5	5965-6405	12
	6	6445-6485	2
	7	6525-6845	9
	8	6885-7085	6
802.11ax-HE80 802.11be-EHT80	5	5985-6385	6
	6	6465-6545	2
	7	6625-6785	3
	8	6865-7025	3
802.11ax-HE160 802.11be-EHT160	5	6025-6345	3
	6	6505	1
	7	6665-6825	2
	8	6985	1
802.11be-EHT320	5	6105-6425	3
	6	6585	1
	7	6745	1
	8	6905	1

Mode	Modulation	Data Rate (Mbps)
802.11ax-HE20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM)	Up to 287
802.11ax-HE40		Up to 574
802.11ax-HE80		Up to 1201
802.11ax-HE160		Up to 2402
802.11be-EHT20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM/4096QAM)	Up to 344
802.11be-EHT40		Up to 688
802.11be-EHT80		Up to 1441
802.11be-EHT160		Up to 2882
802.11be-EHT320		Up to 5764

Channel List								
802.11ax-HE20/802.11be-EHT20								
U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)
5	2	5955	5	81	6335	7	161	6755
	5	5975		85	6375		165	6775
	9	5995		89	6395		169	6795
	13	6015		93	6415		173	6815
	17	6035	6	97	6435	8	177	6835
	21	6055		101	6455		181	6855
	25	6075		105	6475		185	6875
	29	6095		109	6495		189	6895
	33	6115		113	6515		193	6915
	37	6135	7	117	6535		197	6935
	41	6155		121	6555		201	6955
	45	6175		125	6575		205	6975
	49	6195		129	6595		209	6995
	53	6215		133	6615		213	7015
	57	6235		137	6635		217	7035
	61	6255		141	6655		221	7055
	65	6275		145	6675		225	7075
	69	6295		149	6695		229	7095
	73	6315		153	6715		233	7115
	77	6335		157	6735			

Channel List								
802.11ax-HE40/802.11be-EHT40								
U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)
5	3	5965	5	83	6365	7	163	6765
	11	6005		91	6405		171	6805
	19	6045	6	99	6445		179	6845
	27	6085		107	6485	8	187	6885
	35	6125	7	115	6525		195	6925
	43	6165		123	6565		203	6965
	51	6205		131	6505		211	7005
	59	6245		139	6645		219	7045
	67	6285		147	6685		227	7085
	75	6325		155	6725			

Channel List								
802.11ax-HE80/802.11be-EHT80								
U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)	U-NII Band	Channel Number	Freq. (MHz)
5	7	5985	5	87	6385	7	167	6785
	23	6065	6	103	6465	8	183	6865
	39	6145		119	6545		199	6945
	55	6225	7	135	6625		215	7025
	71	6305		151	6705			

Channel List					
802.11ax-HE160/802.11be-EHT160					
U-NII Band	Channel Number	Frequency (MHz)	U-NII Band	Channel Number	Frequency (MHz)
5	15	6025	7	143	6665
	47	6185	8	175	6825
	79	6345		207	6985
6	111	6505			

Channel List					
802.11be-EHT320					
U-NII Band	Channel Number	Frequency (MHz)	U-NII Band	Channel Number	Frequency (MHz)
5	31	6105	6	127	6585
	63	6265	7	159	6745
	95	6425	8	191	6905

Note: Test modes are presented at section 3.7.

3.6. Description of Key Components

3.6.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Win10 Home / Pro	---
		Win11 Home / Pro	---
Main Board	LG	LNL MAIN B/D PCB	Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec&Eltek Company (MCO) Limited.
SUB Board	LG	16Z90TL SUB B/D	Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec&Eltek Company (MCO) Limited.
CPU (Socket: BGA2833)	Intel	Ultra 9 288V (RAM 32GB)	3.3GHz (RAM 32GB LPDDR5x on CPU RAM)
		Ultra 7 258V (RAM 32GB)	2.2GHz (RAM 32GB LPDDR5x on CPU RAM)
		Ultra 7 256V (RAM 16GB)	2.2GHz (RAM 16GB LPDDR5x on CPU RAM)
		Ultra 5 226V (RAM 16GB)	2.1GHz (RAM 16GB LPDDR5x on CPU RAM)
16" LCD Panel	LG Display	LP160WQ1 (SP)(B2)	Resolution: 2560 x 1600, 60Hz (with Touch & w/o Touch)
	CSOT	MNG007DA6-3	Resolution: 2560 x 1600, 60Hz (w/o Touch)
Storage (SSD)	SAMSUNG	---	256GB / 512GB / 1TB
	SK hynix	---	256GB / 512GB / 1TB
	Phison	---	256GB / 512GB / 1TB
Battery Pack	LG	LB3122MM	77Wh, DC 15.52V, 4963mAh
WLAN Combo Card	Intel	BE201D2W	WLAN and BT, 2x2 PCIe M.2 1216-soldered down module FCC ID: PD9BE201D2 IC: 1000M-BE201D2
WLAN Combo Antenna	LG (INPAQ)	WA-P-LELE-04-070	PCB, Mono-pole Type (Black, Gray) For with Touch LCD Panel
	LG (LUXSHARE)	L1LRF017-CS-H	PCB, Mono-pole Type (Black, Gray) For without Touch LCD Panel
Keyboard	TIC	KT0120B8	---
	Lite On	SN8D01B	---
Touch Pad	LITE-ON	SP8001 (SG-A0630-00A)	---
	ELAN	SD081A-36H0	---
Web Camera	Chicony	CKFOF1721005290LH	----
Finger Print	ELAN	F1207A-H0001A	(White)
		F1207A-H0002A	(Black)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Item	Supplier	Model / Type	Character
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet
		80-5946-101	(Black) 10/100 Megabit Ethernet
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100 Megabit Ethernet
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet
	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	370-50713	(White) 10/100 Megabit Ethernet
		370-50714	(Black) 10/100 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
	ARIN TECH CO. LTD	GD-08MF-50-WH-LP12	(White) 10/100/1000 Megabit Ethernet
		GD-08MF-50-BK-LP13	(Black) 10/100/1000 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
	SUZHOU MEC ELECTRONICS	80-5946-230-FA	(White) 10/100/1000 Megabit Ethernet
		80-5946-240-FA	(Black) 10/100/1000 Megabit Ethernet
	Type C to LAN: Shielded, Undetached, 0.12m		
AC Adapter	LG (PI ELECTRONICS)	LP65WFC20P-NJ	(B = Black),(W = White) I/P: AC 100-240V, 1.6A, 50-60Hz O/P: DC 5V, 3A(15W) or DC 9V, 3A(27W) or DC 15V, 3A (45W) or DC 20V, 3.25A (65W) US Type, Wall-Mounted: (2C)
	#1 Type C Cable(3A) #2 Type C Cable (5A)		

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.6.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

Mode			1
Main Board	LG, LNL MAIN B/D PCB		V
SUB Board	LG, 16Z90TL SUB B/D		V
CPU	Intel, Ultra 9 288V (RAM 32GB)		V
16" LCD Panel	LG Display, LP160WQ1 (SP)(B2)		V
Storage (SSD) #1	SAMSUNG, 1TB		V
Storage (SSD) #2	SAMSUNG, 512GB		V
Battery Pack	LG, LB3122MM, 77Wh		V
Keyboard	TIC, KT0120B8		V
Touch Pad	LITE-ON, SP8001 (SG-A0630-00A)		V
Web Camera	Chicony, CKFOF1721005290LH		V
Finger Print	ELAN, F1207A-H0001A		V
WLAN Combo Card	Intel, BE201D2W		V
WLAN Combo Antenna	LG (INPAQ), WA-P-LELE-04-070		V #1
	LG (LUXSHARE), L1LRF017-CS-H		V #2
Type C	AC Adapter	LG (PI ELECTRONICS), LP65WFC20P-NJ	V
	Link to LAN Gender	ARIN (10/100/1000Mbps)	V

3.7. Test Configuration

Mode	TX _{on} (ms)	TX _{on+off} (ms)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
802.11ax-HE20	4.00	4.02	0.995	N/A
802.11ax-HE40	4.02	4.04	0.995	N/A
802.11ax-HE80	4.01	4.03	0.995	N/A
802.11ax-HE160	2.33	2.34	0.996	N/A
802.11be-EHT20	4.01	4.03	0.995	N/A
802.11be-EHT40	4.02	4.05	0.993	N/A
802.11be-EHT80	4.02	4.04	0.995	N/A
802.11be-EHT160	4.02	4.04	0.995	N/A
802.11be-EHT320	4.01	4.04	0.993	N/A
802.11ax-HE20 (RU Config 26)	2.61	2.62	0.996	N/A
802.11ax-HE20 (RU Config 52)	2.61	2.63	0.992	N/A
802.11ax-HE20 (RU Config 106)	2.62	2.63	0.996	N/A
802.11ax-HE20 (RU Config 242)	2.62	2.64	0.992	N/A
802.11ax-HE40 (RU Config 484)	2.62	2.64	0.992	N/A
802.11ax-HE80 (RU Config 996)	2.62	2.64	0.992	N/A
802.11be-EHT20 (RU Config 26)	2.60	2.62	0.992	N/A
802.11be-EHT20 (RU Config 52)	2.59	2.60	0.996	N/A
802.11be-EHT20 (RU Config 106)	2.59	2.60	0.996	N/A
802.11be-EHT20 (RU Config 242)	2.60	2.61	0.996	N/A
802.11be-EHT40 (RU Config 484)	2.60	2.61	0.996	N/A
802.11be-EHT80 (RU Config 996)	2.59	2.60	0.996	N/A
MRU Config 996T*2	2.60	2.61	0.996	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	TX _{on} (ms)	TX _{on+off} (ms)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
MRU Config 26T+52T	2.59	2.60	0.996	N/A
MRU Config 26T+106T	2.59	2.60	0.996	N/A
MRU Config 484T+242T	2.59	2.60	0.996	N/A
MRU Config 996T+484T	2.59	2.61	0.992	N/A
MRU Config 996T+484T+242T	2.61	2.63	0.992	N/A
MRU Config 996T*2+484T	2.59	2.61	0.992	N/A
MRU Config 996T*3	2.59	2.61	0.992	N/A
MRU Config 996T*3+484T	2.59	2.60	0.996	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

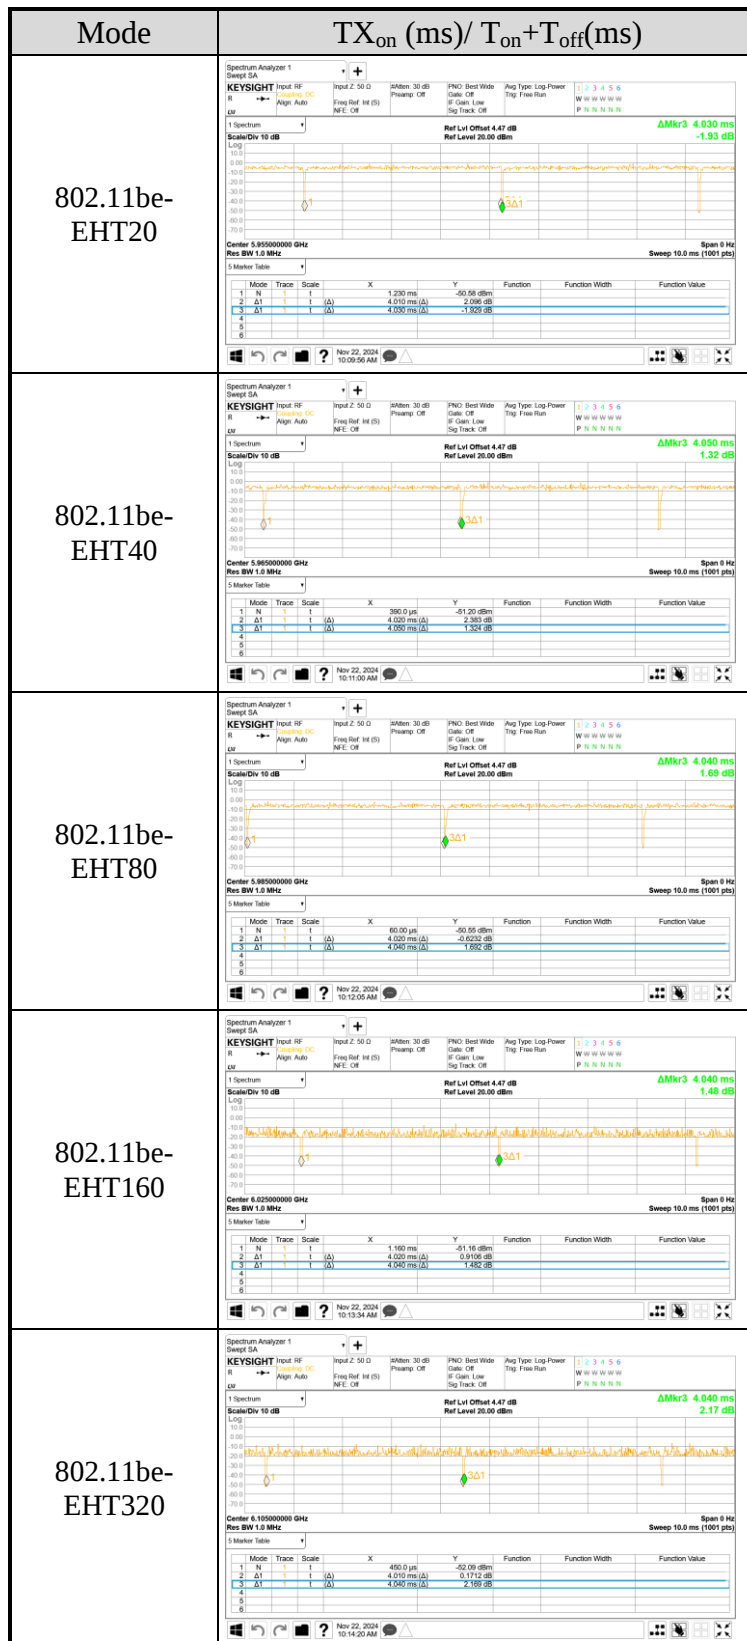


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303




Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

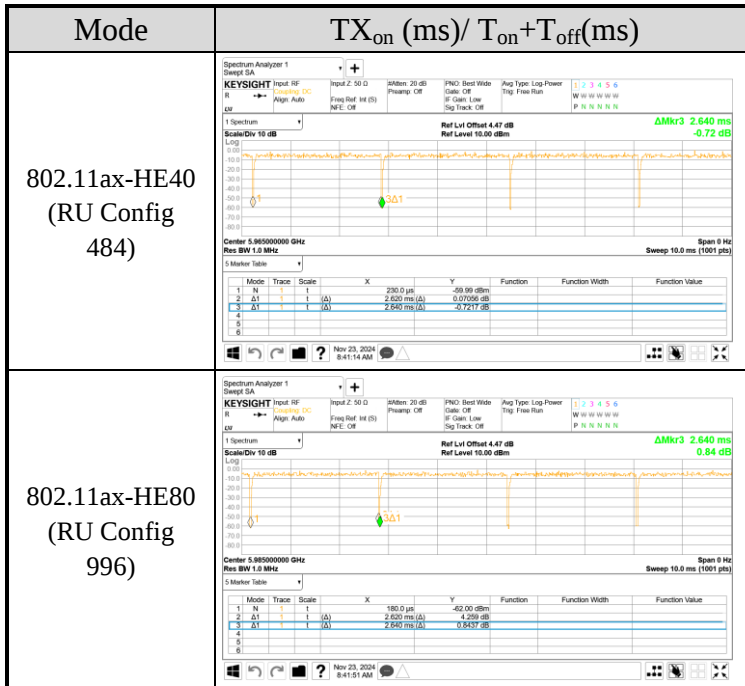


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

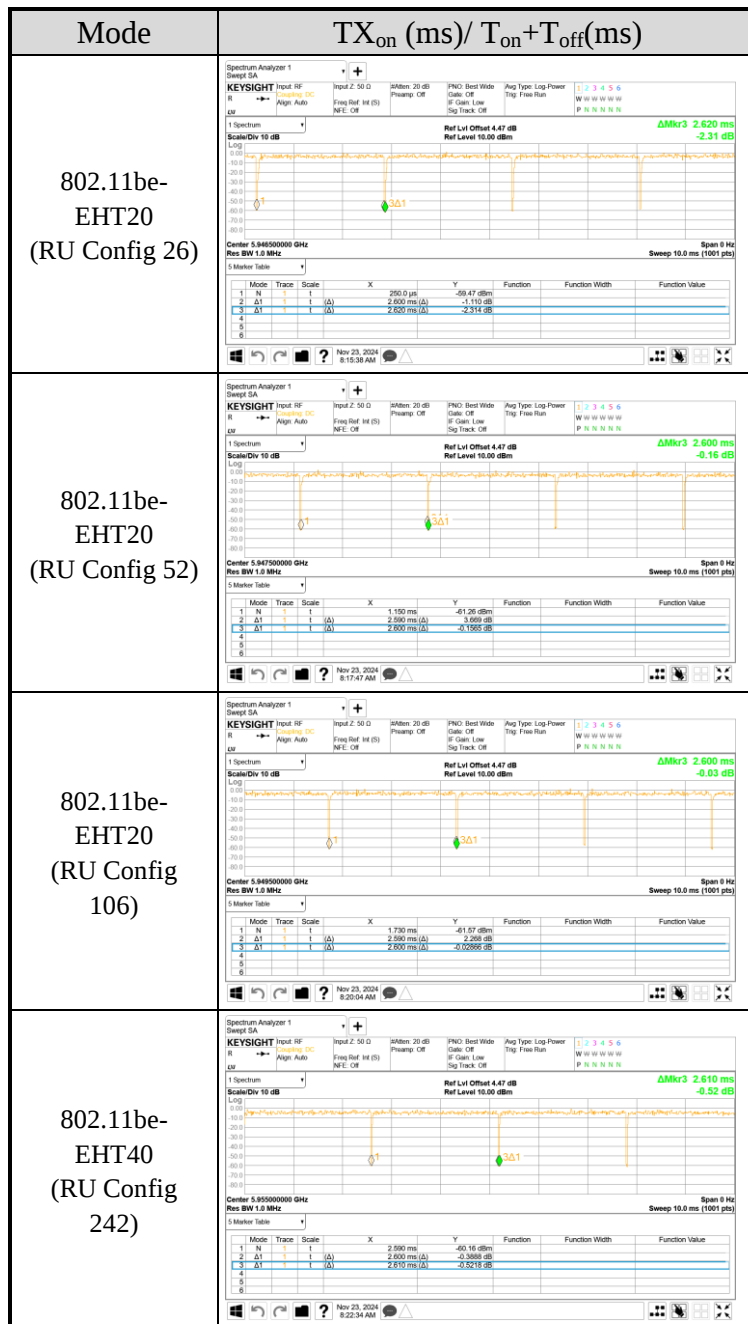


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

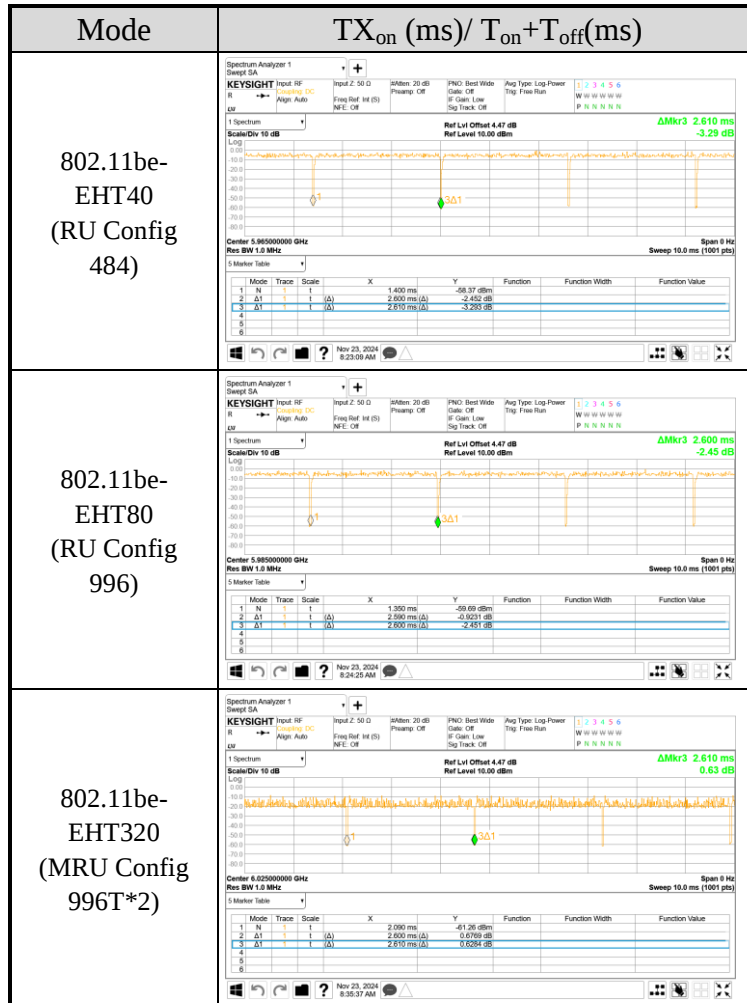


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

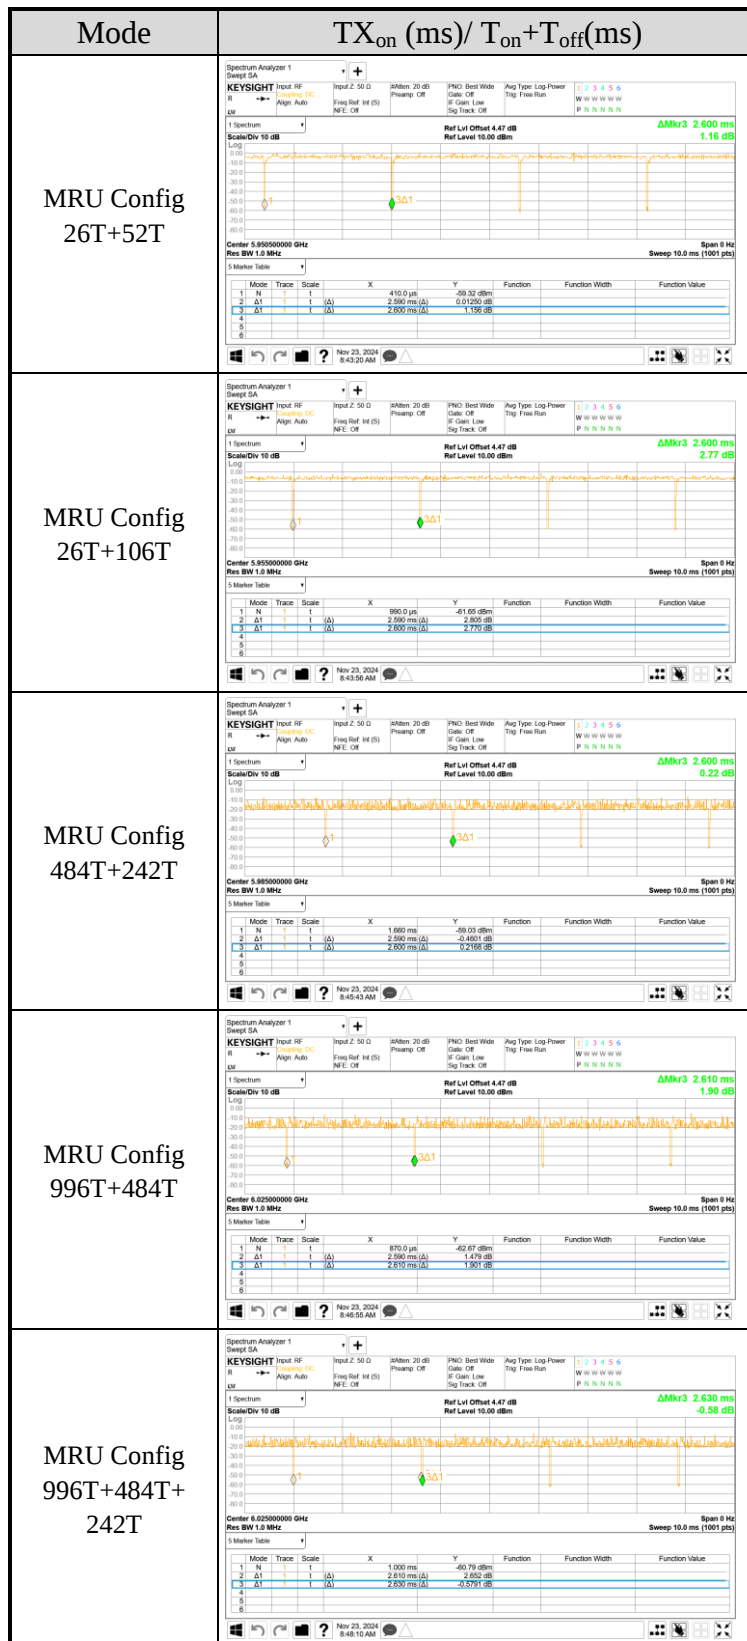

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244,Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

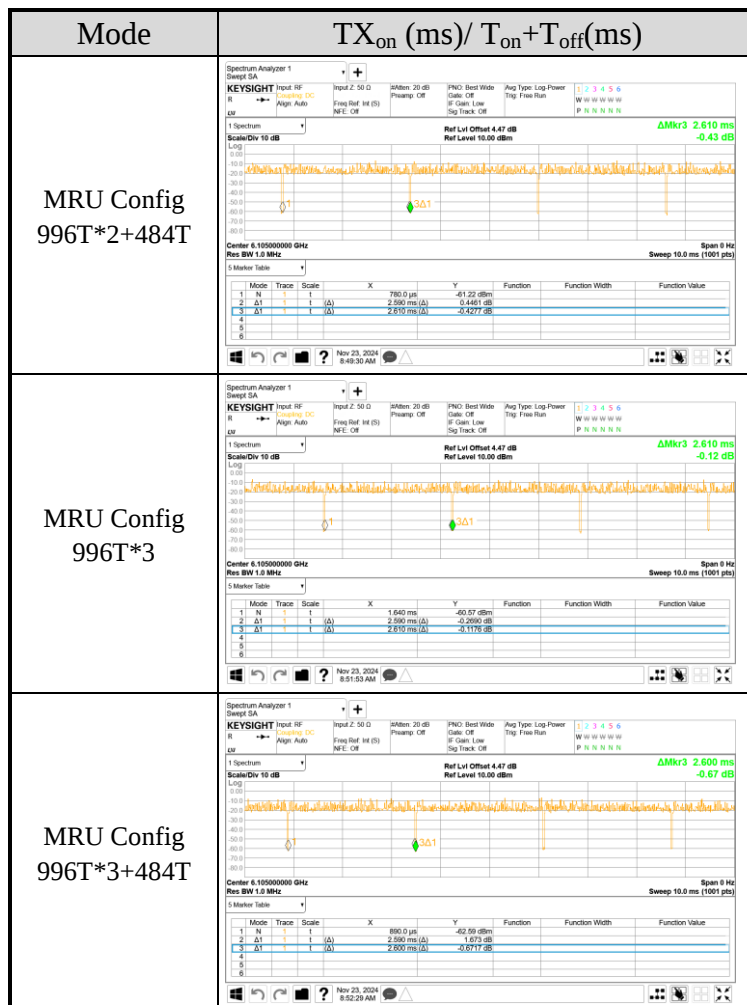

AC Conduction				
Normal operation (With INPAQ Antenna)				
Normal operation (With LUXSHARE-ICT Antenna)				

Item	Antenna	Mode	Data Rate	Test Channel
Radiated Test Case	INPAQ	802.11be-EHT320	HE0	159
	LUXSHARE-ICT	802.11be-EHT320	HE0	159

● OFDM Modulation

Item	Antenna	Mode	Data Rate	Test Channel
Radiated Test Case	INPAQ	802.11ax-HE20	HE0	2/113/181/185
		802.11ax-HE40	HE0	3/107/147/187
		802.11ax-HE80	HE0	7/119/135/215
		802.11ax-HE160	HE0	15/111/143/207
		802.11be-EHT20	EHT0	2/97/149/209
		802.11be-EHT40	EHT0	3/107/147/187
		802.11be-EHT80	EHT0	7/119/135/199
		802.11be-EHT160	EHT0	79/111/175/207
		802.11be-EHT320	EHT0	95/127/159/191
		802.11ax-HE20	HE0	2/233
		802.11ax-HE40	HE0	3/227
		802.11ax-HE80	HE0	7/215
		802.11ax-HE160	HE0	15/207
		802.11be-EHT20	EHT0	2/233
		802.11be-EHT40	EHT0	3/227
		802.11be-EHT80	EHT0	7/215
		802.11be-EHT160	EHT0	15/207
		802.11be-EHT320	EHT0	31/191

Item	Antenna	Mode	Data Rate	Test Channel
Radiated Test Case	LUXSHARE-ICT	802.11ax-HE20	HE0	2/113/181/185
		802.11ax-HE40	HE0	3/107/147/187
		802.11ax-HE80	HE0	7/119/135/215
		802.11ax-HE160	HE0	15/111/143/207
		802.11be-EHT20	EHT0	2/97/149/209
		802.11be-EHT40	EHT0	3/107/147/187
		802.11be-EHT80	EHT0	7/119/135/199
		802.11be-EHT160	EHT0	79/111/175/207
		802.11be-EHT320	EHT0	95/127/159/191
		802.11ax-HE20	HE0	2/233
		802.11ax-HE40	HE0	3/227
		802.11ax-HE80	HE0	7/215
		802.11ax-HE160	HE0	15/207
		802.11be-EHT20	EHT0	2/233
		802.11be-EHT40	EHT0	3/227
		802.11be-EHT80	EHT0	7/215
		802.11be-EHT160	EHT0	15/207
		802.11be-EHT320	EHT0	31/191

Item		Mode	Data Rate	Test Channel
Conducted Test Case	Maximum Power Spectral Density/ Maximum Conducted Output power/ Emission/Occupied Bandwidth	802.11ax-HE20	HE0	2/45/93/97/105/11 3/117/149/181/18 5/209/233
		802.11ax-HE40	HE0	3/43/91/99/107/11 5/147/179/187/21 1/227
		802.11ax-HE80	HE0	7/39/87/103/119/1 35/151/167/183/1 99/215
		802.11ax-HE160	HE0	15/47/79/111/143/ 175/207
		802.11be-EHT20	EHT0	2/45/93/97/105/11 3/117/149/181/18 5/209/233
		802.11be-EHT40	EHT0	3/43/91/99/107/11 5/147/179/187/21 1/227
		802.11be-EHT80	EHT0	7/39/87/103/119/1 35/151/167/183/1 99/215
		802.11be-EHT160	EHT0	15/47/79/111/ 143/175/207
		802.11be-EHT320	EHT0	31/63/95/127/ 159/191
	Band Edge	802.11ax-HE20	HE0	2/233
		802.11ax-HE40	HE0	3/227
		802.11ax-HE80	HE0	7/215
		802.11ax-HE160	HE0	15/207
		802.11be-EHT20	EHT0	2/233
		802.11be-EHT40	EHT0	3/227
		802.11be-EHT80	EHT0	7/215
		802.11be-EHT160	EHT0	15/207
		802.11be-EHT320	EHT0	31/191
	Spurious Emission	802.11ax-HE20	HE0	2/113/149/185
		802.11ax-HE40	HE0	3/99/147/187
		802.11ax-HE80	HE0	87/119/135/215
		802.11ax-HE160	HE0	15/111/143/207
		802.11be-EHT20	EHT0	2/113/149/185
		802.11be-EHT40	EHT0	3/99/147/187
		802.11be-EHT80	EHT0	87/119/135/215
		802.11be-EHT160	EHT0	15/111/143/207
		802.11be-EHT320	EHT0	95/127/159/191

	Item	Mode	Data Rate	Test Channel
Conducted Test Case	In-Band Emission (Channel Mask)	802.11ax-HE20	HE0	2/45/93/97/105/ 113/117/149/181/ 185/209/233
		802.11ax-HE40	HE0	3/43/91/99/107/ 115/147/179/187/ 211/227
		802.11ax-HE80	HE0	7/39/87/103/119/ 135/151/167/183/ 199/215
		802.11ax-HE160	HE0	15/47/79/111/143/1 75/207
		802.11be-EHT20	EHT0	2/45/93/97/105/ 113/117/149/181/ 185/209/233
		802.11be-EHT40	EHT0	3/43/91/99/107/ 115/147/179/187/ 211/227
		802.11be-EHT80	EHT0	7/39/87/103/119/ 135/151/167/183/ 199/215
		802.11be-EHT160	EHT0	15/47/79/111/143/1 75/207
		802.11be-EHT320	EHT0	31/63/95/127/159/1 91
	Contention Based Protocol	802.11be-EHT20	EHT0	45/105/149/209
		802.11be-EHT320	EHT0	31/127/159/191

● OFDMA Modulation

Item		Antenna	Tones	RU Index	Mode	Data Rate	Test Channel
Radiated Test Case	Band Edge	INPAQ	26T	0	802.11ax-HE160	HE0	15
				36	802.11ax-HE80	HE0	215
			52T	37	802.11ax-HE160	HE0	15
				S52	802.11ax-HE160	HE0	207
			106T	53	802.11ax-HE160	HE0	15
				60	802.11ax-HE80	HE0	215
			242T	61	802.11ax-HE80	HE0	7
				S64	802.11ax-HE160	HE0	207
			484T	65	802.11ax-HE40	HE0	3
				65	802.11ax-HE80	HE0	227
			996T	67	802.11ax-HE80	HE0	7
				S67	802.11ax-HE80	HE0	215
			26T	0	802.11be-EHT160	EHT0	15
				36	802.11be-EHT80	EHT0	215
			52T	37	802.11be-EHT20	EHT0	2
				W52	802.11be-EHT320	EHT0	191
			106T	53	802.11be-EHT20	EHT0	2
				60	802.11be-EHT80	EHT0	215
			242T	61	802.11be-EHT320	EHT0	31
				64	802.11be-EHT80	EHT0	215
			484T	65	802.11be-EHT80	EHT0	7
				66	802.11be-EHT80	EHT0	215
			996T	67	802.11be-EHT160	EHT0	15
				67	802.11be-EHT80	EHT0	215
			996T*2	S68	802.11be-EHT320	EHT0	31
				W68	802.11be-EHT320	EHT0	191
			26T+52T	70	802.11be-EHT40	EHT0	3
				75	802.11be-EHT40	EHT0	227
			26T+106T	82	802.11be-EHT40	EHT0	3
				85	802.11be-EHT40	EHT0	227
			484T+242T	92	802.11be-EHT80	EHT0	7
				91	802.11be-EHT80	EHT0	215
			996T+484T	S94	802.11be-EHT160	EHT0	15
				95	802.11be-EHT160	EHT0	207
			996T+484T+242T	99	802.11be-EHT160	EHT0	15
				96	802.11be-EHT160	EHT0	207
			996Tx2+484T	100	802.11be-EHT320	EHT0	31
				T102	802.11be-EHT320	EHT0	191
			996T*3	W104	802.11be-EHT320	EHT0	31
				104	802.11be-EHT320	EHT0	191
			996T*3+484T	W106	802.11be-EHT320	EHT0	31
				105	802.11be-EHT320	EHT0	191

Item	Antenna	Tones	RU Index	Mode	Data Rate	Test Channel
Radiated Test Case	Band Edge	LUXSH ARE-IC T	26T	0	802.11ax-HE160	HE0 15
				36	802.11ax-HE80	HE0 215
			52T	37	802.11ax-HE160	HE0 15
				S52	802.11ax-HE160	HE0 207
			106T	53	802.11ax-HE160	HE0 15
				60	802.11ax-HE80	HE0 215
			242T	61	802.11ax-HE80	HE0 7
				S64	802.11ax-HE160	HE0 207
			484T	65	802.11ax-HE40	HE0 3
				65	802.11ax-HE80	HE0 227
			996T	67	802.11ax-HE80	HE0 7
				S67	802.11ax-HE80	HE0 215
			26T	0	802.11be-EHT160	EHT0 15
				36	802.11be-EHT80	EHT0 215
			52T	37	802.11be-EHT20	EHT0 2
				W52	802.11be-EHT320	EHT0 191
			106T	53	802.11be-EHT20	EHT0 2
				60	802.11be-EHT80	EHT0 215
			242T	61	802.11be-EHT320	EHT0 31
				64	802.11be-EHT80	EHT0 215
			484T	65	802.11be-EHT80	EHT0 7
				66	802.11be-EHT80	EHT0 215
			996T	67	802.11be-EHT160	EHT0 15
				67	802.11be-EHT80	EHT0 215
			996T*2	S68	802.11be-EHT320	EHT0 31
				W68	802.11be-EHT320	EHT0 191
			26T+52T	70	802.11be-EHT40	EHT0 3
				75	802.11be-EHT40	EHT0 227
			26T+106T	82	802.11be-EHT40	EHT0 3
				85	802.11be-EHT40	EHT0 227
			484T+242T	92	802.11be-EHT80	EHT0 7
				91	802.11be-EHT80	EHT0 215
			996T+484T	S94	802.11be-EHT160	EHT0 15
				95	802.11be-EHT160	EHT0 207
			996T+484T+242T	99	802.11be-EHT160	EHT0 15
				96	802.11be-EHT160	EHT0 207
			996Tx2+484T	100	802.11be-EHT320	EHT0 31
				T102	802.11be-EHT320	EHT0 191
			996T*3	W104	802.11be-EHT320	EHT0 31
				104	802.11be-EHT320	EHT0 191
			996T*3+484T	W106	802.11be-EHT320	EHT0 31
				105	802.11be-EHT320	EHT0 191

Item		Antenna	Tones	RU Index	Mode	Data Rate	Test Channel
Conducted Test Case	Maximum Power Spectral Density/ In-Band Emission (Channel Mask)	INPAQ	26T	18	802.11ax-HE80	HE0	135
			52T	52	802.11ax-HE80	HE0	135
			106T	60	802.11ax-HE160	HE0	143
			242T	62	802.11ax-HE160	HE0	143
			484T	65	802.11ax-HE80	HE0	135
			996T	67	802.11ax-HE160	HE0	143
			26T	19	802.11be-EHT80	EHT0	135
			52T	52	802.11be-EHT160	EHT0	143
			106T	56	802.11be-EHT80	EHT0	135
			242T	62	802.11be-EHT80	EHT0	135
			484T	66	802.11be-EHT160	EHT0	143
			996T	67	802.11be-EHT160	EHT0	143
			996T*2	W68	802.11be-EHT320	EHT0	31
			26T+52T	72	802.11be-EHT20	EHT0	117
				70	802.11be-EHT40	EHT0	147
			26T+106T	82	802.11be-EHT20	EHT0	149
				82	802.11be-EHT40	EHT0	147
			484T+242T	92	802.11be-EHT80	EHT0	7
			996T+484T	S94	802.11be-EHT160	EHT0	15
			996T+484T+242T	98	802.11be-EHT160	EHT0	143
			996Tx2+484T	103	802.11be-EHT320	EHT0	159
			996T*3	W104	802.11be-EHT320	EHT0	63
			996T*3+484	W106	802.11be-EHT320	EHT0	31
Conducted Test Case	Maximum Power Spectral Density/ In-Band Emission (Channel Mask)	LUXSH ARE-IC T	26T	18	802.11ax-HE80	HE0	7
			52T	44	802.11ax-HE40	HE0	3
			106T	60	802.11ax-HE80	HE0	7
			242T	62	802.11ax-HE80	HE0	7
			484T	65	802.11ax-HE40	HE0	3
			996T	67	802.11ax-HE80	HE0	7
			26T	W36	802.11be-EHT320	EHT0	95
			52T	S37	802.11be-EHT160	EHT0	15
			106T	W60	802.11be-EHT320	EHT0	95
			242T	W62	802.11be-EHT320	EHT0	95
			484T	65	802.11be-EHT40	EHT0	3
			996T	67	802.11be-EHT160	EHT0	15
			996T*2	W68	802.11be-EHT320	EHT0	31
			26T+52T	72	802.11be-EHT20	EHT0	2
				75	802.11be-EHT40	EHT0	3
			26T+106T	83	802.11be-EHT20	EHT0	2
				82	802.11be-EHT40	EHT0	3
			484T+242T	92	802.11be-EHT80	EHT0	7
			996T+484T	S94	802.11be-EHT160	EHT0	15
			996T+484T+242T	99	802.11be-EHT160	EHT0	15
			996Tx2+484T	T102	802.11be-EHT320	EHT0	95
			996T*3	W104	802.11be-EHT320	EHT0	63
			996T*3+484	W106	802.11be-EHT320	EHT0	31

Item		Tones	RU Index	Mode	Data Rate	Test Channel
Conducted Test Case	Maximum Conducted Output power ^{Note 3}	26T	0/4/8	802.11ax-HE20	HE0	2/45/93/97/105/ 113/117/149/ 181/185/209/ 233
		52T	37/39/40			
		106T	53/54			
		242T	61			
		26T	0/8/17	802.11ax-HE40	HE0	3/43/91/99/107/ 115/147/179/ 187/211/227
		52T	37/40/44			
		106T	53/54/56			
		242T	61/62			
		484T	65	802.11ax-HE80	HE0	7/39/87/103/119 /135/151/167/18 3/199/215
		26T	0/18/36			
		52T	37/44/52			
		106T	53/56/60			
		242T	61/62/64			
		484T	65/66			
		996T	67	802.11ax-HE160	HE0	15/47/79/111/ 143/175/207
		26T	0/18/36 S0/S18/S36			
		52T	37/44/52 S37/S44/S52			
		106T	53/56/60 S53/S56/S60			
		242T	61/62/64 S61/S62/S64			
		484T	65/66 S65/S66			
		996T	65/S67			

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Item	Tones	RU Index	Mode	Data Rate	Test Channel
Conducted Test Case	26T	0/4/8	802.11be-EHT20	EHT0	2/45/93/97/105/ 113/117/149/ 181/185/209/ 233
	52T	37/39/40			
	106T	53/54			
	242T	61			
	26T	0/8/17	802.11be-EHT40	EHT0	3/43/91/99/107/ 115/147/179/ 187/211/227
	52T	37/40/44			
	106T	53/54/56			
	242T	61/62			
	484T	65	802.11be-EHT80	EHT0	7/39/87/103/119 /135/151/167/18 3/199/215
	26T	0/18/36			
	52T	37/44/52			
	106T	53/56/60			
	242T	61/62/64			
	484T	65/66			
	996T	67	802.11be-EHT160	EHT0	15/47/79/111/ 143/175/207
	26T	0/18/36 S0/S18/S36			
	52T	37/44/52 S37/S44/S52			
	106T	53/56/60 S53/S56/S60			
	242T	61/62/64 S61/S62/S64			
	484T	65/66 S65/S66			
	996T	65/S67	802.11be-EHT320	EHT0	31/63/95/127/ 159/191
	26T	0/19/36/S0/ S19/S36/T0/ T19/T36/W0/W19/ W36			
	52T	37/44/52/S37/S44/ S52/T37/T44/T52/ W37/W44/W52			
	106T	53/56/60/S53/S56/ S60/T53/T56/T60/ W53/W56/W60			
	242T	61/62/64/S61/S62/ S64/T61/T62/T64/ W61/W62/W64			
	484T	65/66/S65/S66/T6 5/T66/W65/W66			
	996T	67/S67/T67/W67			
	996T*2	S68/W68			

Item	Tones	RU Index	Mode	Data Rate	Test Channel
Conducted Test Case	26T+52T	70/71/72	802.11be-EHT20	EHT0	2/45/93/97/105/ 113/117/149/ 181/185/209/ 233
	26T+106T	82/83			
	26T+52T	70/73/75	802.11be-EHT40	EHT0	3/43/91/99/107/ 115/147/179/ 187/211/227
	26T+106T	82/83			
	484T+242T	90/91/92/93	802.11be-EHT80	EHT0	7/39/87/103/119 /135/151/167/18 3/199/215
	996T+484T	94/95/S94/S95	802.11be-EHT160	EHT0	15/47/79/111/ 143/175/207
	996T+484T+ 242T	96/97/98/99/S9 6/S97/S98/S99			
	996T*2+484T	100/101/102/10 3/S100/S101/T 102/T103/W1 00/W101/W10 2/W103	802.11be-EHT320	EHT0	31/63/95/127/ 159/191
	996T*3	104/S104/T104 /W104			
	996T*3+484T	105/106/S105/ S106/T105/T10 6/W105/W106			

Note 1: ☐ Mobile Device ☒ Portable Device

and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

☒ Lie ☐ Side ☐ Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

Note 3: The data rates were selected based on preliminary testing that identified rate as the worst case for output power.

Note 4: For the CBP test, The EUT does not support channel puncturing mechanism.

Note 5: The EUT support MRU configuration as below:

Small RU: 52 tone + 26 tone, 106 tone + 26 tone

Large RU: 484 tone + 242 tone, 996 tone + 484 tone, 996 tone + 484 tone + 242 tone, 996 tone * 2 + 484 tone, 996 tone * 3, 996 tone * 3 + 484 tone.

Note 6: For the Partial_RU modes which include single RU, Multi RU that are less than or equal Full RU power setting, we have conducted tests for Power, PSD, Mask and Radiated band-edge.

Note 7: For the Partial_RU modes including single RU, Multi RU, We had done the pre-scan to determine the worst-case modes from the all combinations. The worst-case results (PSD, Mask, Radiated Band-Edge) are presented in the report.

3.8. Output Power Setting

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE20	5	5955	2.00	2.00	802.11ax-HE20	7	6535	2.00	2.00
		6175	2.00	2.00			6695	2.00	2.00
		6415	2.00	2.00			6855	2.00	2.00
	6	6435	2.00	2.00		8	6875	2.00	2.00
		6475	2.00	2.00			6995	2.00	2.00
		6515	2.00	2.00			7115	-6.00	-6.00

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE40	5	5965	5.00	5.00	802.11ax-HE40	7	6525	5.00	5.00
		6165	5.00	5.00			6685	5.00	5.00
		6405	5.00	5.00			6845	5.00	5.00
	6	6445	5.00	5.00		8	6885	5.00	5.00
		6485	5.00	5.00			7005	5.00	5.00
							7085	5.00	5.00

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE80	5	5985	8.00	8.00	802.11ax-HE80	7	6625	8.00	8.00
		6145	8.00	8.00			6705	8.00	8.00
		6385	8.00	8.00			6785	8.00	8.00
	6	6465	8.00	8.00		8	6865	8.00	8.00
		6545	8.00	8.00			6945	8.00	8.00
							7025	8.00	8.00

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11ax-HE160	5	6025	11.00	11.00	802.11ax-HE160	7	6665	11.00	11.00
		6185	11.00	11.00			6825	11.00	11.00
		6345	11.00	11.00		8	6985	11.00	11.00
	6	6505	11.00	11.00					

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11be-EHT20	5	5955	2.00	2.00	802.11be-EHT20	7	6535	2.00	2.00
		6175	2.00	2.00			6695	2.00	2.00
		6415	2.00	2.00			6855	2.00	2.00
	6	6435	2.00	2.00		8	6875	2.00	2.00
		6475	2.00	2.00			6995	2.00	2.00
		6515	2.00	2.00			7115	-6.00	-6.00

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11be-EHT40	5	5965	5.00	5.00	802.11be-EHT40	7	6525	5.00	5.00
		6165	5.00	5.00			6685	5.00	5.00
		6405	5.00	5.00			6845	5.00	5.00
	6	6445	5.00	5.00		8	6885	5.00	5.00
		6485	5.00	5.00			7005	5.00	5.00
							7085	5.00	5.00

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11be-EHT80	5	5985	8.00	8.00	802.11be-EHT80	7	6625	8.00	8.00
		6145	8.00	8.00			6705	8.00	8.00
		6385	8.00	8.00			6785	8.00	8.00
	6	6465	8.00	8.00		8	6865	8.00	8.00
		6545	8.00	8.00			6945	8.00	8.00
							7025	8.00	8.00

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11be-EHT160	5	6025	11.00	11.00	802.11be-EHT160	7	6665	11.00	11.00
		6185	11.00	11.00			6825	11.00	11.00
		6345	11.00	11.00		8	6985	11.00	11.00
	6	6505	11.00	11.00					

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Power Setting		Mode	U-NII Band	Centre Frequency (MHz)	Power Setting	
			AUX	Main				AUX	Main
802.11be-EHT320	5	6105	13.00	13.00	802.11be-EHT320	6	6585	13.00	13.00
		6265	13.00	13.00		7	6745	13.00	13.00
		6425	13.00	13.00		8	6905	11.75	11.75

3.9. Tested Supporting System List

3.9.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	DELL	U2718Qb	CN-0M5R5F-QDC 00-99P-04CL	N/A
2.	USB Mouse	Lenovo	SM-8823	8SSM50L24506AV LC99H049R	N/A
3.	Earphone	APPLE	N/A	N/A	N/A
Partner System					
4.	WiFi Router	ASUS	RT-BE96U	RBIG6G200822ZT7	FCC ID: MSQ-RTBE6G00

3.9.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8 m
3.	Earphone Cable: Unshielded, Undetachable, 1.2m
4.	AC adapter: M/N: ADD011, DC Power Cable: Unshielded, Detachable, 1.8m, Bonded two ferrite cores AC Power Cord: Unshielded, Detachable, 1.1m LAN cable: Unshielded, Detachable, 3.0m
5.	LAN cable: Unshielded, Detachable, 1.8m

3.10. Setup Configuration

3.10.1. EUT Configuration for Power Line & Radiated Emission

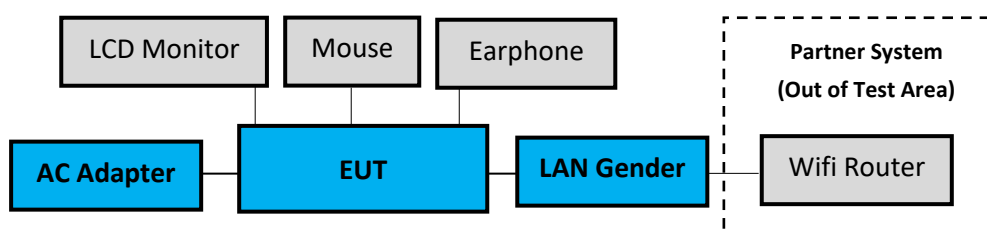

3.10.2. EUT Configuration for RF Conducted Test Items



3.11. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

[ANT AUX port (A Button in DRTU), ANT Main port (B Button in DRTU)].

3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.7 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.13.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities			Frequency Range	Uncertainty
Conduction Test	☒	No. 7 Shielded Room	9kHz-150kHz	±3.6dB
			150kHz-30MHz	±3.3dB
	☐	No. 8 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
Radiation Test	☒	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.8dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.3dB
	☐	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.5dB
			6GHz-18GHz, 3m	±4.0dB
	☐	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.9dB
			1GHz-6GHz, 3m	±4.2dB
			6GHz-18GHz, 3m	±3.8dB
	☐	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.1dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.6dB
	Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m	±3.4dB

Remark : Uncertainty = $ku_c(y)$

Test Items	Uncertainty
Maximum Power Spectral Density	± 0.52dB
Maximum Conducted Output Power	± 0.72dB
Emission Bandwidth	± 0.38%
Contention Based Protocol	± 2%

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	103114	2024.06.07	1 Year
2.	A.M.N.	R&S	ESH2-Z5	100366	2024.11.25	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-1370-9	2024.01.05	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	101495	2023.12.06	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.7 S/R	2024.04.11	1 Year
6.	Signal Cable	Thermax/CDT	RG-142	CE-07	2024.05.09	1 Year
7.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2024.08.12	1 Year
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2024.03.21	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2024.06.18	1 Year
4.	Amplifier	EMCI	EMC9145	980751	2024.07.09	1 Year
5.	Amplifier	HP	8447D	2944A06305	2023.12.20	1 Year
6.	Microwave Preamplifier	Agilent	8449B	3008A02678	2024.02.20	1 Year
7.	Microwave Amplifier	Keysight	83051A	MY56480113	2024.09.11	1 Year
8.	Loop antenna	Electro-Metrics	EMCI-LPA600	287	2024.07.31	1 Year
9.	Bilog Antenna	TESEQ	CBL6112D	33821	2024.02.17	1 Year
10.	Double-Ridged Waveguide Horn	EMCO	3115	9112-3775	2024.04.30	1 Year
11.	Horn Antenna	COM-POWER	AH-840	101092	2024.01.12	1 Year
12.	Notch Filter	Warison	WFIL-N5925-64 25F	WR61CFWC4 B1	2024.01.12	1 Year
13.	Notch Filter	Warison	WFIL-N6425-65 25F	WR61CFWC6 B1	2024.01.12	1 Year
14.	Notch Filter	Warison	WFIL-N6525-68 75F	WR61CFWC8 B1	2024.01.12	1 Year
15.	Notch Filter	Warison	WFIL-N6875-71 25F	WR61CFWC2 B1	2024.01.12	1 Year
16.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2024.01.05	1 Year
17.	Coaxial Cable	HUBER+SUHNER	RG223/U	RE-33	2024.03.01	1 Year
18.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2024.01.05	1 Year
19.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2024.08.20	1 Year
20.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2024.04.11	1 Year
21.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010B	MY59071380	2024.03.29	1 Year
2.	Spectrum Analyzer	R&S	FSV30	101181	2024.07.13	1 Year
3.	Power Meter	Anritsu	ML2495A	2127005	2024.11.25	1 Year
4.	Power Sensor	Anritsu	MA2411B	1911360	2024.12.02	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2024.04.11	1 Year

4.4. Contention Based Protocol Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9030B	MY61330403	2024. 12. 18	1 Year
2.	Spectrum Analyzer	Keysight	N9010B	MY59071380	2024. 03. 09	1 Year
3.	MXG RF Vector Signal Generator	Agilent	N5182B	MY53050409	2024. 11.15	1 Year
4.	Frequency Extender	KEYSIGHT	N5182BX07	MY59362533	2024. 11.15	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2024. 04. 11	1 Year
6.	Attenuator (10dB) X2	Worken	WK0602-10	0120A02208001 S	N.C.R	N.C.R
7.	Attenuator (30dB) X1	Worken	WK0602-30	0120A02208002 S	N.C.R	N.C.R
8.	CBP Test Unit	Keysight	N.C.R	N.C.R	N.C.R	N.C.R


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.10

5.1.2. Shielded Room Setup Diagram

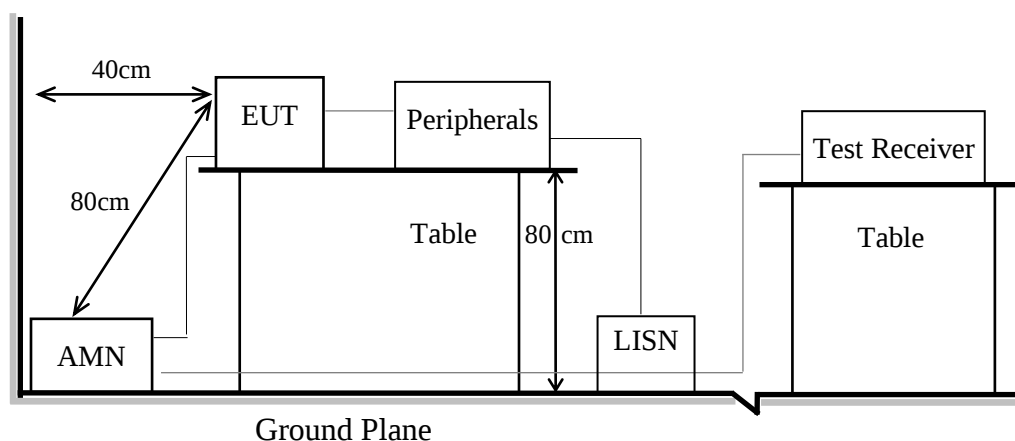

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.10


6.1.2. Setup Diagram for 9kHz-30MHz

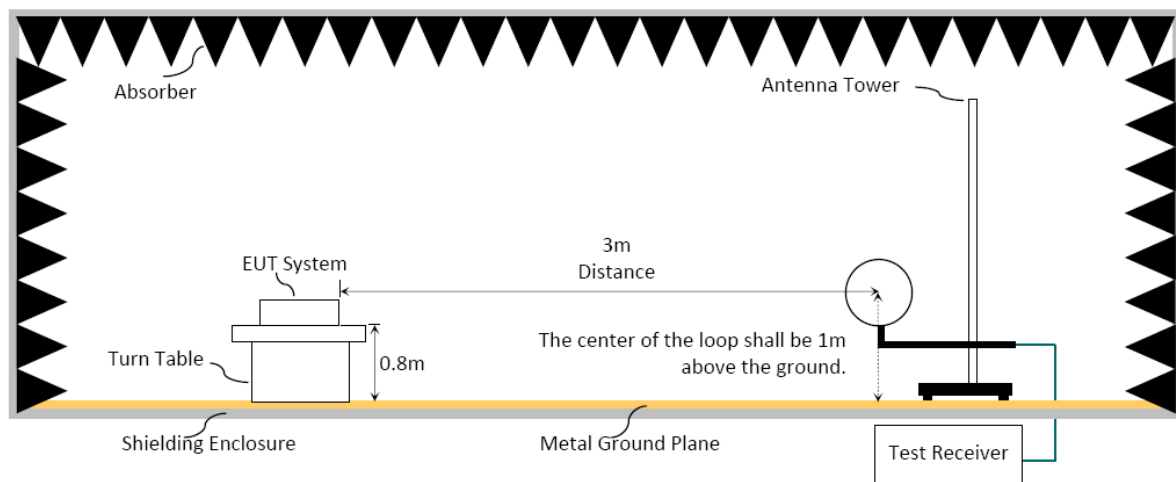

6.1.3. Setup Diagram for 30-1000MHz

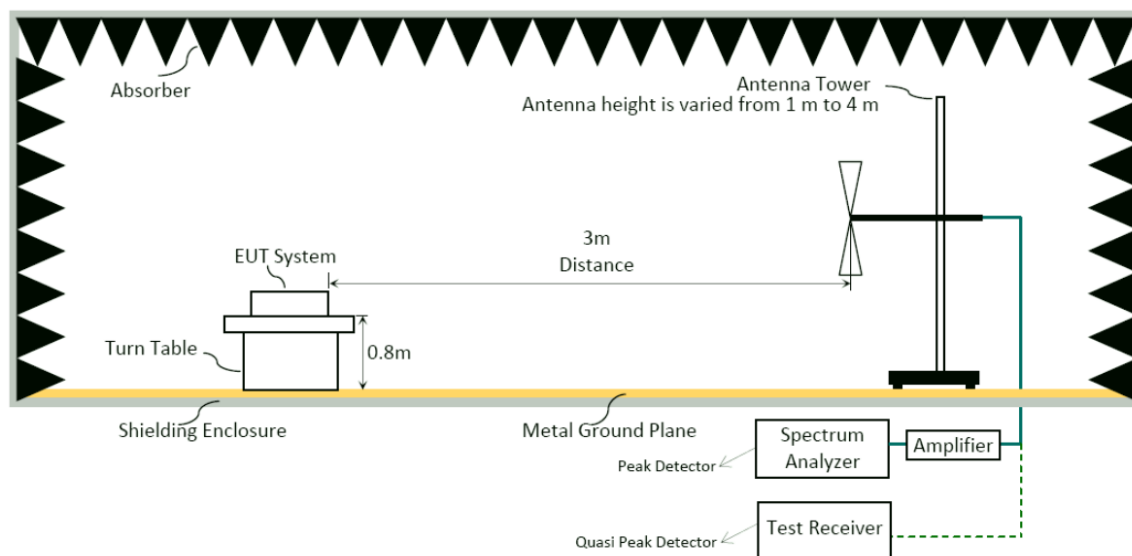

6.1.4. Setup Diagram for above 1GHz

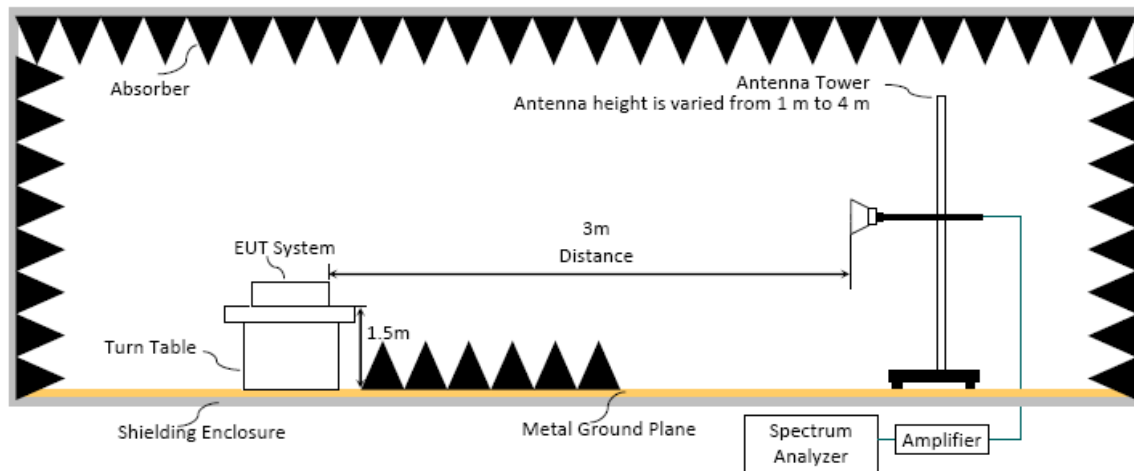

6.2. Radiated Emission Limits

Radiated emissions fall in restricted bands, as defined in FCC Section 15.205/RSS-Gen Section 8.10 table 7 must be in compliance with the radiated emission limits specified in FCC Section 15.209/RSS-Gen Section 8.9 table 6 as below.

6.2.1. General Limit

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

(2) The tighter limit applies to the edge between two frequency bands.

(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(4) Fundamental and emission fall within operation band are exempted from this section.

(5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.2.2. Limit for non-restricted frequency above 1 GHz

Frequency Band (MHz)	E.I.R.P. Limit	Field Strength Limit at 3 m
Out of 5925 to 7125	-27 dBm/MHz	68.2 dB μ V/m

Note: Field Strength at 3 m= E.I.R.P. + 95.2 dB

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

6.3.1. Radiated measurement Spectrum Analyzer Setting

6.3.1.1 Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120kHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

6.3.1.2 Frequency above 1GHz to 10th harmonic (up to 40 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:**■ Option 1:**

(1) RBW = 1MHz

(2) VBW $\geq 1/T$. (Duty Cycle < 98%, when duty cycle presented in section 3.7)

(3) VBW = set VBW $\leq$ RBW / 100, but not less than 10Hz (Duty Cycle $\geq$ 98%, when duty cycle presented in section 3.7)

Mode	VBW Setting
802.11ax-HE20	10Hz
802.11ax-HE40	10Hz
802.11ax-HE80	10Hz
802.11ax-HE160	10Hz
802.11be-EHT40	10Hz
802.11be-EHT80	10Hz
802.11be-EHT160	10Hz
802.11be-EHT320	10Hz
802.11be-EHT40	10Hz
RU (26T)	10Hz
RU (52T)	10Hz
RU (106T)	10Hz
RU (242T)	10Hz
RU (484T)	10Hz
RU (996T)	10Hz
MRU Config 996T*2	10Hz
MRU Config 26T+52T	10Hz
MRU Config 26T+106T	10Hz
MRU Config 484T+242T	10Hz
MRU Config 996T+484T	10Hz
MRU Config 996T+484T+242T	10Hz
MRU Config 996T*2+484T	10Hz
MRU Config 996T*3	10Hz
MRU Config 996T*3+484T	10Hz

(4) Detector = Peak.

(5) Sweep time = auto.

(6) Trace mode = max hold.

(7) Allow sweeps to continue until the trace stabilizes.

□ Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.3.2. Radiated band edge measurement Spectrum Analyzer Setting

For without 99% OBW edge within 2 MHz of the authorized band edge:

The spectrum analyzer setting, please refer to section 6.3.1.2

For with 99% OBW edge within 2 MHz of the authorized band edge:

Per KDB 789033 Section G.3.d and ANSI C63.10 -2013 6.10.4, SA setting as below:

a. Fundamental field strength of SA setting:

The spectrum analyzer setting, please refer to section 6.3.1.2

b. Delta of SA setting:

- (1) RBW = 1% SPAN but no less than 30 KHz
(In this case, RBW = 500 KHz)
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Correction Factor (Via delta, dB) = Fundamental Emission Level (dB μ V/m) @ RBW 500KHz - Band Edge Emission Level (dB μ V/m) @ RBW 500kHz

Band Edge Emission Level (dB μ V/m) =
Fundamental Emission Level (dB μ V/m) @ RBW 1MHz - Marker Delta (dB)

6.4. Measurement Result Explanation


- Peak Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Meter Reading (dB μ V) (including Preamp factor if test used)
- Average Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Meter Reading (dB μ V) (including Preamp factor if test used)
- ☐ Average Emission Level (dB μ V/m) = Peak Emission Level (dB μ V/m) + DCCF (dB)
Duty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7.
- ☐ ERP = Peak Emission Level (dB μ V/m) - 95.2dB - 2.14dB
- ☐ Band Edge Emission Level (dB μ V/m) = Fundamental Emission Level (dB μ V/m) - Marker-Delta (dB)

6.5. Test Results

Please refer to Appendix A.

7. MAXIMUM POWER SPECTRAL DENSITY

7.1. Block Diagram of Test Setup

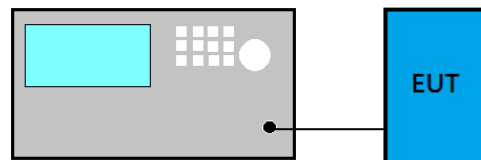

7.2. Specification Limits

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1dBm e.i.r.p. in any 1-megahertz band

7.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ Method AVGSA-2 (Spectrum channel power)

- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW) ≥ 3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Use peak search function to find out the maximum power density.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.


For power density emission measurements from multiple outputs of a transmitter or from multiple transmitters: Please refer to KDB 662911 E 2) c).

7.4. Test Results


Please refer to Appendix A

8. MAXIMUM CONDUCTED OUTPUT POWER

8.1. Block Diagram of Test Setup

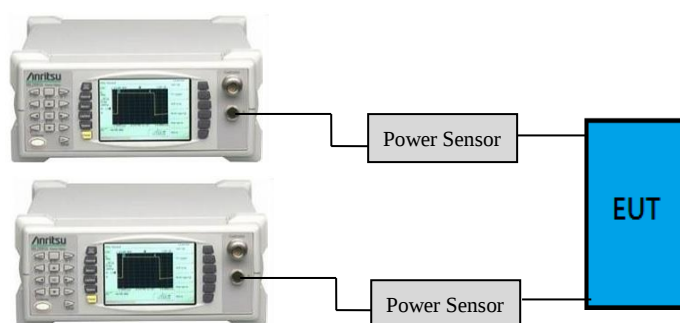

- For 802.11ac-VHT80/160, 802.11ax-HE160 modes only

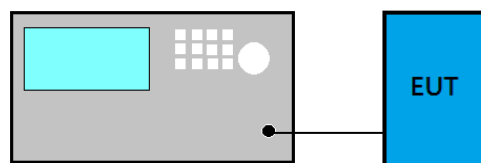

8.2. Specification Limits

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

8.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

■ **Method AVGSA-2 (Spectrum channel power) for 802.11ac-VHT80/160, 802.11ax-HE80/160 modes only**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW) $\geq$ 3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

8.4. Test Results

Please refer to Appendix A

9. EMISSION/OCCUPIED BANDWIDTH

9.1. Block Diagram of Test Setup

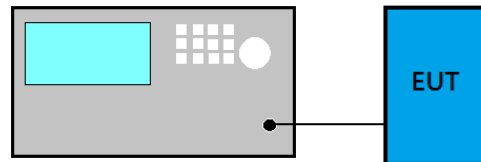

9.2. Specification Limits

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz

9.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:


- (1) Set RBW = 1% of the emission bandwidth
- (2) Set VBW > RBW
- (3) Detector = Peak
- (4) Trace mode = max hold
- (5) Setting channel bandwidth function x dB to -26 dB to record the final bandwidth.

9.4. Test Results

Please refer to Appendix A

10. UNDERSIRABLE EMISSIONS LIMITS: SPURIOUS EMISSION (CONDUCTED)

10.1. Block Diagram of Test Setup

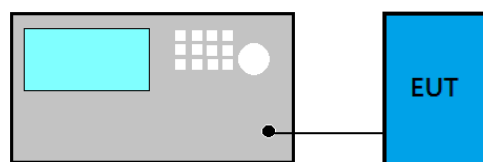

10.2. Spurious Emission Specification Limits

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925- 7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see FCC Part §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level

10.3. Test Procedure

Please refer to KDB 789033 D02 v02r01 G5


For spurious emission measurements from multiple outputs of a transmitter or from multiple transmitters: Please refer to KDB 662911 E 3) a) (iii).

10.4. Test Results

Please refer to Appendix A

11. IN-BAND EMISSION (CHANNEL MASK)

11.1. Block Diagram of Test Setup

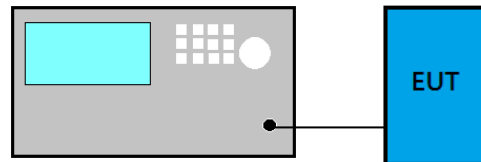

11.2. Specification Limits

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

11.3. Test Procedure

Following measurement procedure is reference to KDB 987594 D02 U-NII 6GHz EMC Measurement v01v01:

Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:

- (a) Set the span to encompass the entire 26 dB EBW of the signal.
- (b) Set RBW = same RBW used for 26 dB EBW measurement.
- (c) Set VBW $\geq 3 \times$ RBW
- (d) Number of points in sweep $\geq (2 \times \text{span} / \text{RBW})$.
- (e) Sweep time = auto.
- (f) Detector = RMS (i.e., power averaging)
- (g) Trace average at least 100 traces in power averaging (rms) mode.
- (h) Use the peak search function on the instrument to find the peak of the spectrum.


- (1) Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - (a) Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - (b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - (c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- (2) Adjust the span to encompass the entire mask as necessary.
- (3) Clear trace.
- (4) Trace average at least 100 traces in power averaging (rms) mode.
- (5) Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

11.4. Test Results

Please refer to Appendix A

12. CONTENTION BASED PROTOCOL

12.1. Block Diagram of Test Setup

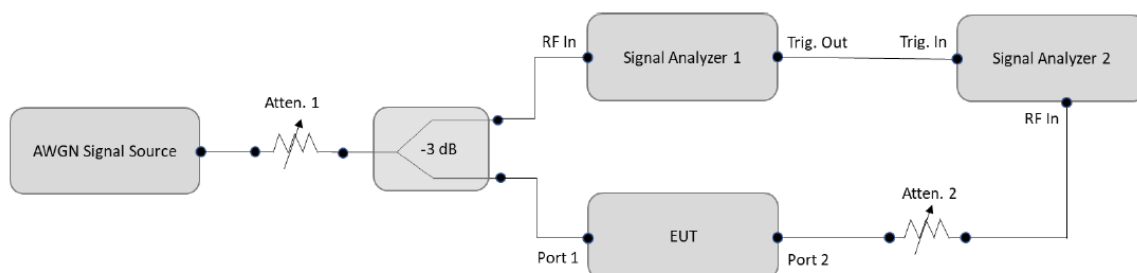

12.2. Specification Limits

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01v01

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	One	Tune incumbent and EUT transmission ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	One	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

Where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

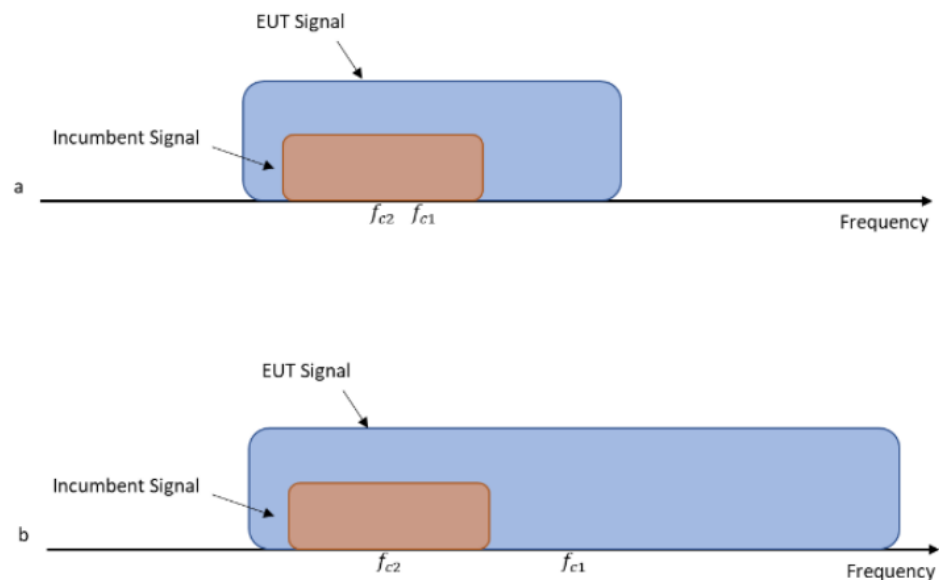


Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it

12.3. Test Procedure

Following measurement procedure is reference to KDB 987594 D02 U-NII 6GHz EMC Measurement v01v01:

- (1) To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the EUT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
- (2) Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- (3) Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- (4) (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- (5) Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center frequency for the AWGN signal and repeat the process.
- (6) The test tool is "LAN test" to let the EUT to transmit with a constant duty cycle.

12.4. Test Results

Please refer to Appendix A



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

13.DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

TEST DATA AND PLOTS

(Model: 16Z90TL)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX B

TEST PHOTOGRAPHS

(Model: 16Z90TL)