



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

2. SCHEMATICS:

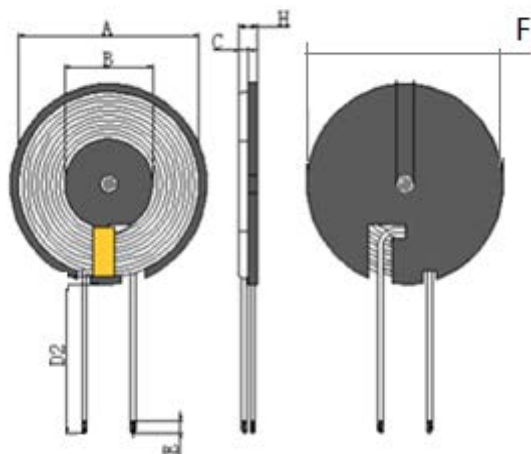

1. 线圈贴磁片，磁片尺寸
43.5±1mm，厚度为0.8±0.05mm
开L线槽。
2. 线圈出线位置
缠胶纸 1-2Ts；
3. 隔磁片底部要贴背胶

A	B	C	D2	E	H	F			
39±2.0	16±0.5	0.8±0.05	15±3	3±1.5	2.2MAX	43.5±1			

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	热风线 0.08*24mm *2P 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR		Q值 Q Value	HI-POT
TEST	磁片coil+magnetic	S-F			
CON	100KHz, 0.25V	AT 25℃			
SPEC	6.8uH±10%	100mΩ Max			

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	热风线wire	热风线0.08*24股 0.08*24mm wire	NANJINGJINNINGCO,LTD	
2	无铅锡条lead-free solder bar	无铅锡条 lead-free solder bar	QIAODO	
3	磁片magnetic film	ø43.5*0.8锰锌硬磁片开L槽 ø43.5*0.8 MZ magnetic film with L groove	TAIYI CO.,LTD	
4	胶水glue	9999	LIANCHENG CO.,LTD	
5	高温胶纸tape	8mm宽高温胶纸 8mm width tape	CUDAK CO.,LTD	
6	背胶gum	41.5*0.1	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G43.5开槽+背胶15mm
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦立红		韦立红