



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

2. SCHEMATICS:

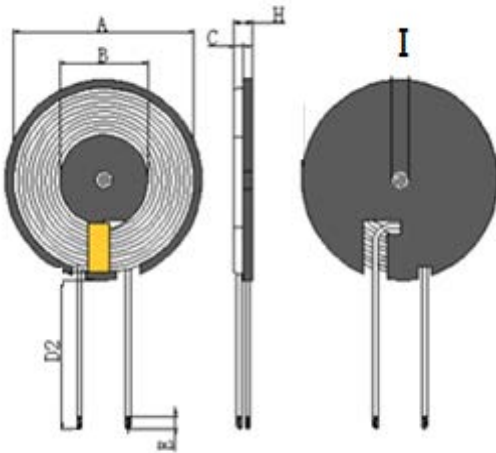

1. 线圈贴磁片, 磁片尺寸
44±1mm, ,厚度为0.8±0.05mm
开L线槽。
2. 线圈出线位置
缠胶纸 1-2Ts;
3. 隔磁片底部要贴背胶

A	B	C	D2	E	H	I			I
43.5±1.0	13.5±1	0.8±0.05	65±3	4±2	2.8MAX	5±0.5			

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	丝包线silk covered wire ø0.08*105mm 2UEW	12TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q值 Q Value	HI-POT
TEST CONDITION	coil+magnetic film	S-F	单独线圈single coil		
	100KHz, 0.25V	AT 25℃	100KHz, 0.25V		
SPEC	6.5uH±10%	60mΩ Max	3.8uH±15%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	丝包线0.08*105股 silk covered wire 0.08*105mm	丙酮丝包线0.08*105股acetone silk covered wire 0.08*105mm	NANJINGJINNINGCO,LTD	
2	无铅锡条lead-free solder bar	无铅锡条lead-free solder bar	QIAODO	
3	磁片magnetic film	ø44*0.8锰锌硬磁片开L槽 ø44*0.8 MZ magnetic film with L groove	TAIYI CO.,LTD	
4	胶水glue	9999	LIANCHENG CO.,LTD	
5	高温胶纸tape	7mm宽高温胶纸 7mm width tape	CUDAK CO.,LTD	
6	背胶gum	41.5*0.1	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G44开槽grooves+背胶gum 65mm
DRAWN BY		CHECKED BY	APPROVED BY

何伟华	韦立红	韦立红
-----	-----	-----