



Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

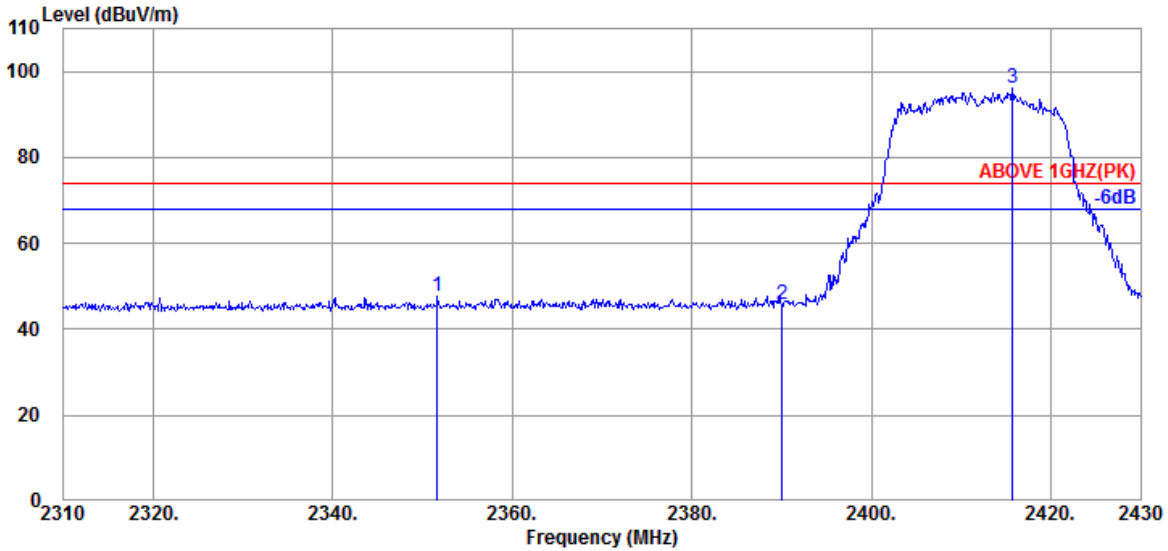

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2351.640	28.20	5.65	39.91	53.65	47.59	74.00	26.41	Peak
2390.040	28.27	5.70	39.91	51.67	45.73	74.00	28.27	Peak
@ 2415.720	28.39	5.73	39.91	101.96	96.17	---	---	Peak

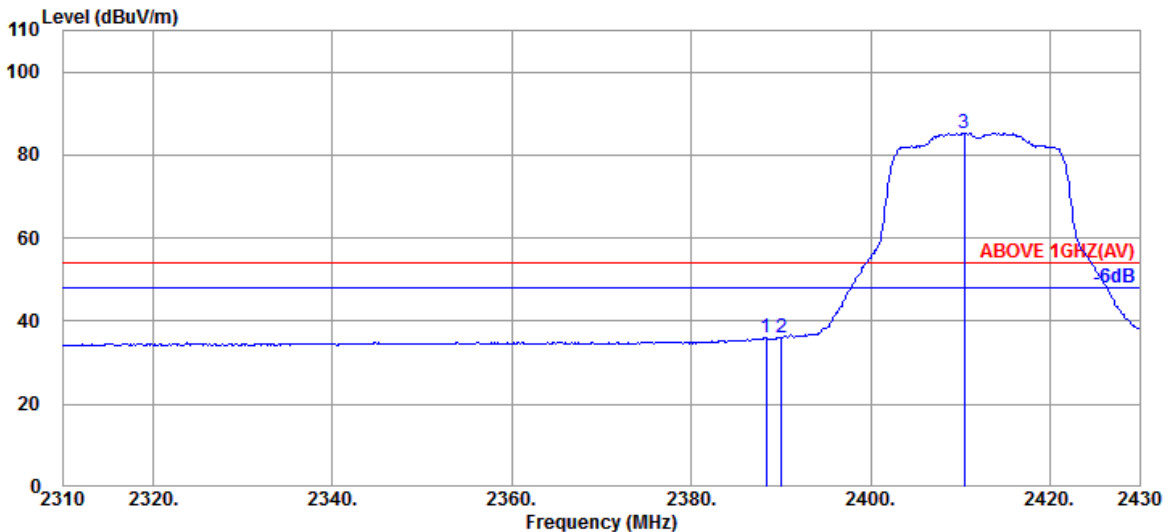


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.360	28.27	5.70	39.91	41.95	36.01	54.00	17.99	Average
2390.040	28.27	5.70	39.91	42.09	36.15	54.00	17.85	Average
@ 2410.440	28.34	5.73	39.91	91.07	85.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

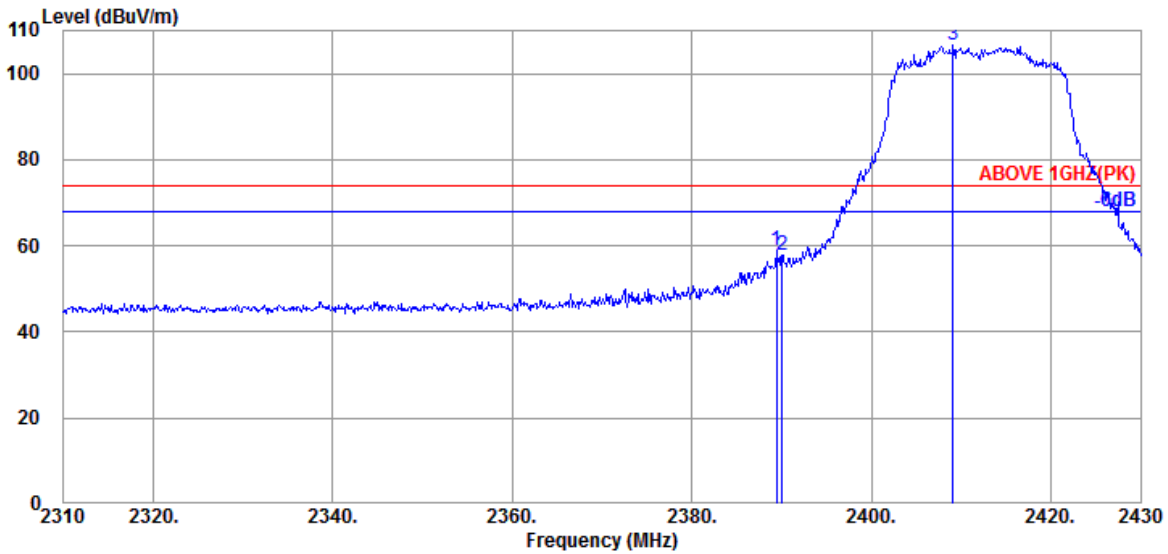

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	5.70	39.91	65.07	59.13	74.00	14.87	Peak
2390.040	28.27	5.70	39.91	63.90	57.96	74.00	16.04	Peak
@ 2409.120	28.34	5.73	39.91	112.57	106.73	---	---	Peak

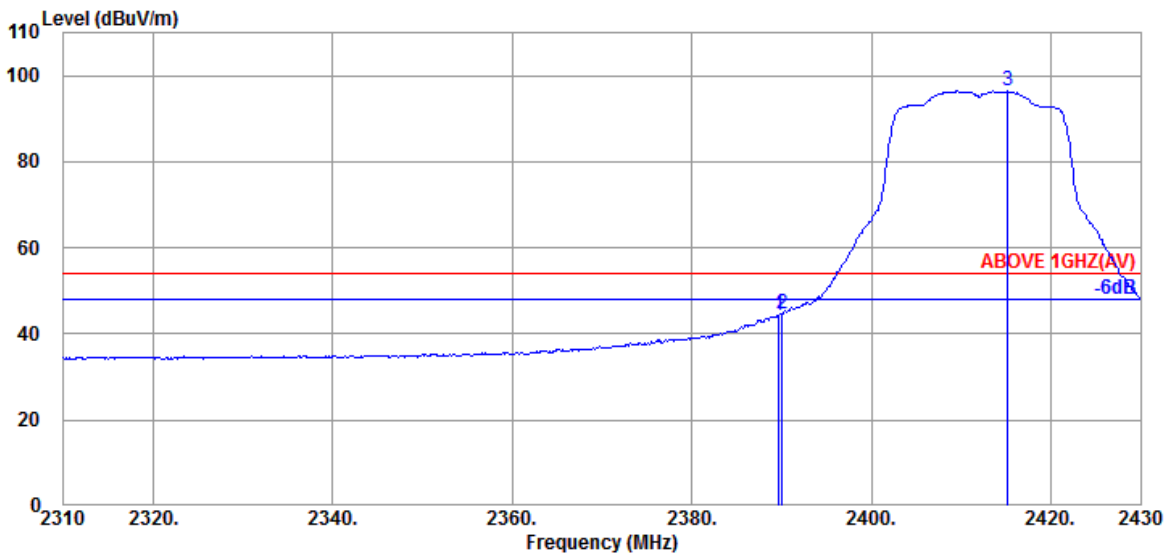


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.70	39.91	50.29	44.35	54.00	9.65	Average
2390.040	28.27	5.70	39.91	50.72	44.78	54.00	9.22	Average
@ 2415.240	28.39	5.73	39.91	102.17	96.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

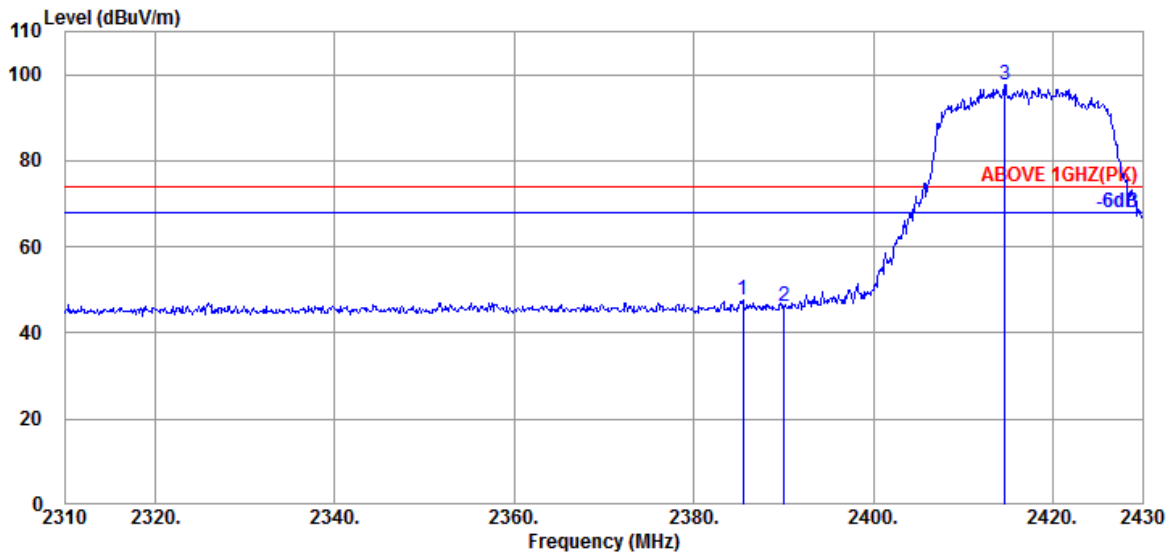

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.480	28.27	5.68	39.91	53.53	47.57	74.00	26.43	Peak
2390.040	28.27	5.70	39.91	52.07	46.13	74.00	27.87	Peak
@ 2414.640	28.39	5.73	39.91	103.56	97.77	---	---	Peak

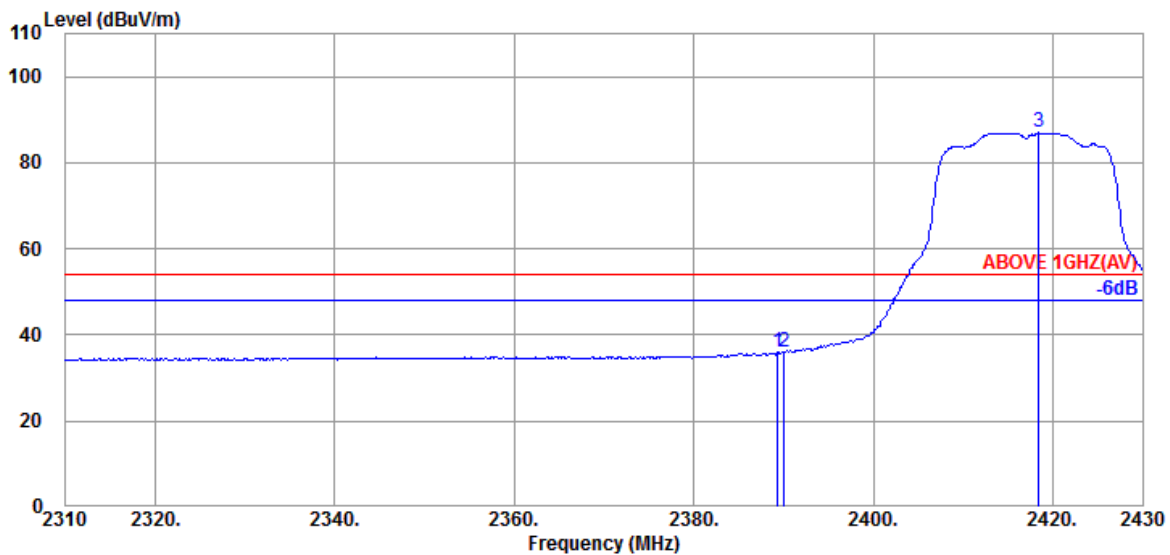


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.27	5.70	39.91	41.87	35.93	54.00	18.07	Average
2390.040	28.27	5.70	39.91	42.15	36.21	54.00	17.79	Average
@ 2418.480	28.43	5.73	39.91	92.74	86.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

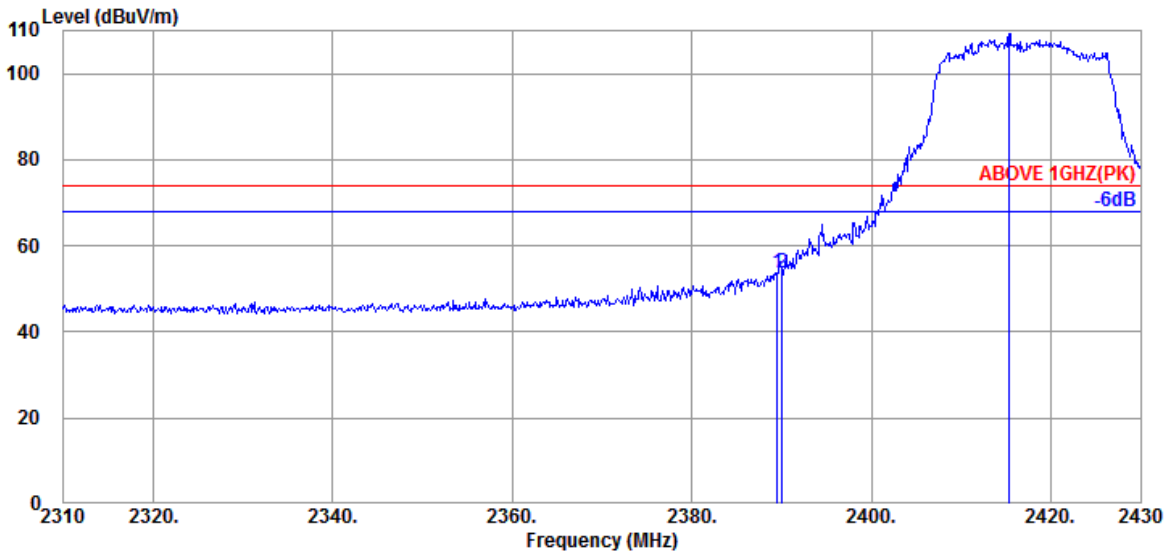

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	5.70	39.91	59.78	53.84	74.00	20.16	Peak
2390.040	28.27	5.70	39.91	59.53	53.59	74.00	20.41	Peak
@ 2415.360	28.39	5.73	39.91	115.07	109.28	---	---	Peak

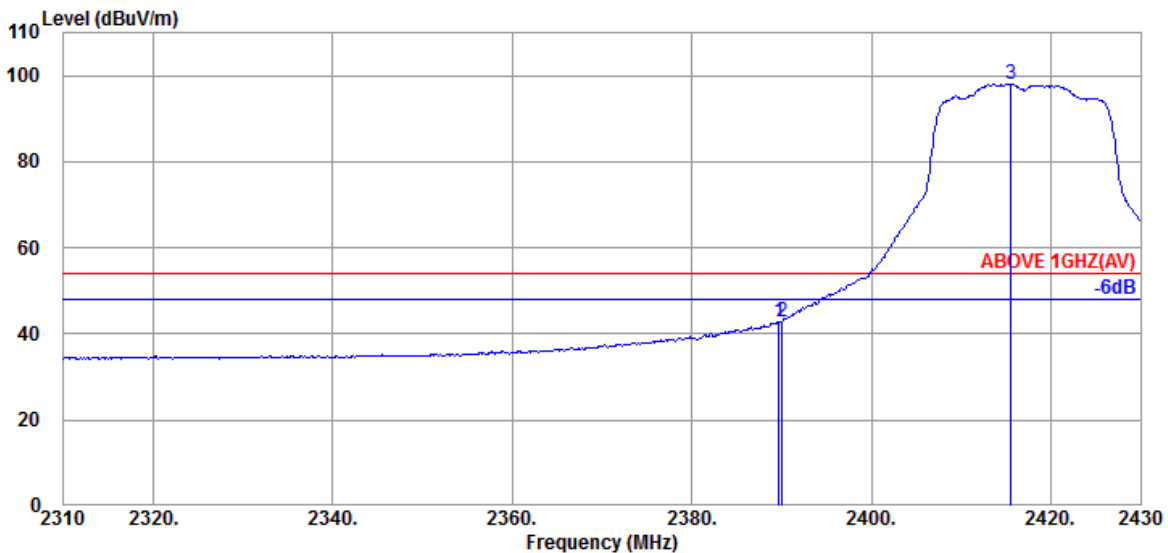


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.70	39.91	48.63	42.69	54.00	11.31	Average
2390.040	28.27	5.70	39.91	48.72	42.78	54.00	11.22	Average
@ 2415.600	28.39	5.73	39.91	103.83	98.04	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

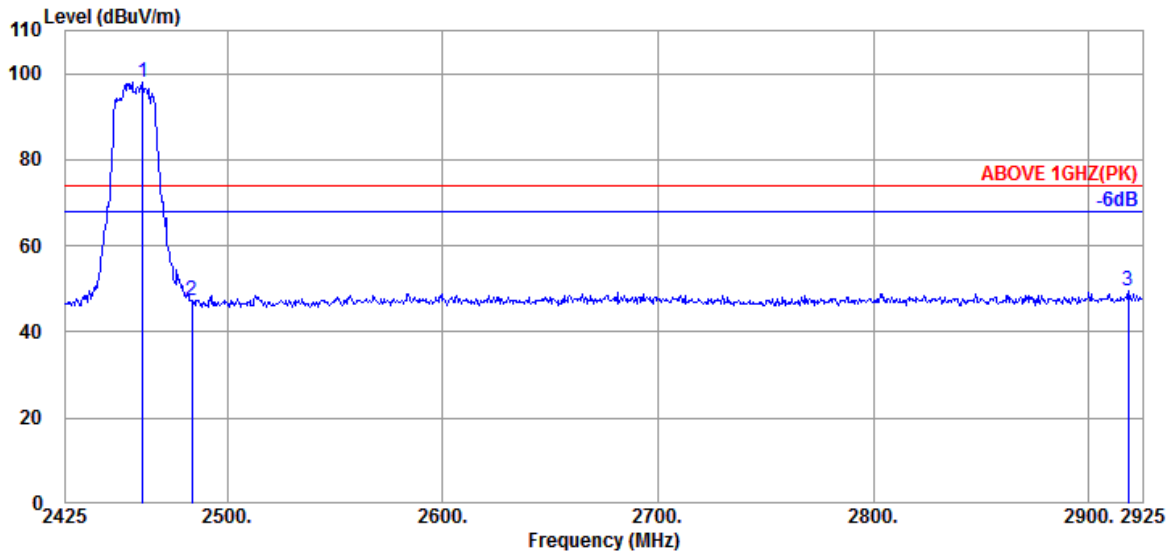

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.60	5.81	39.91	103.64	98.14	---	---	Peak
2483.500	28.60	5.83	39.91	52.94	47.46	74.00	26.54	Peak
2918.500	29.75	6.38	40.01	53.38	49.50	74.00	24.50	Peak

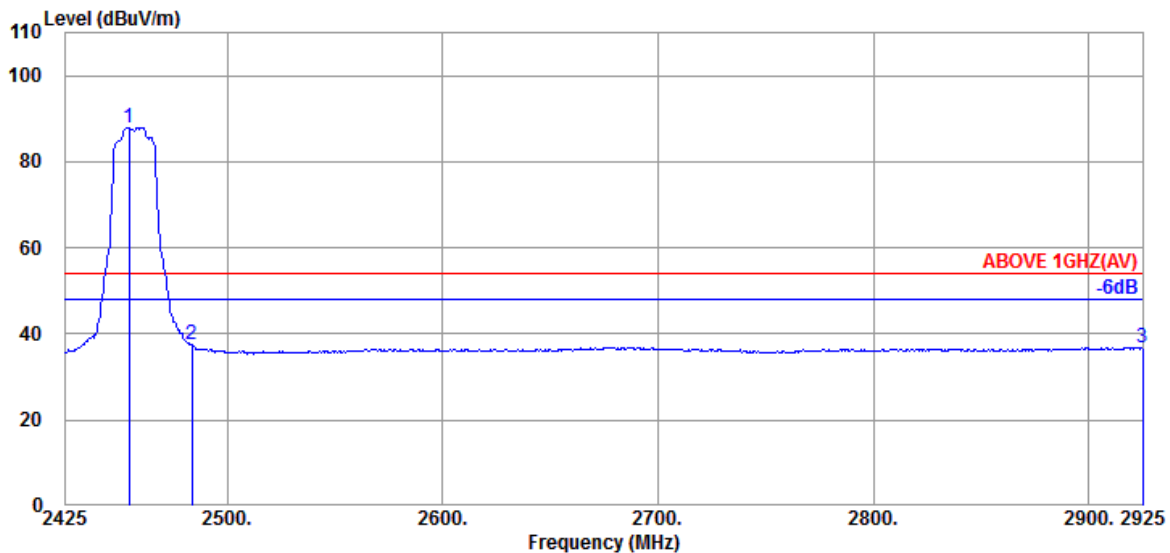


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	28.60	5.81	39.91	93.46	87.96	---	---	Average
2483.500	28.60	5.83	39.91	42.88	37.40	54.00	16.60	Average
2925.000	29.75	6.38	40.01	40.83	36.95	54.00	17.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

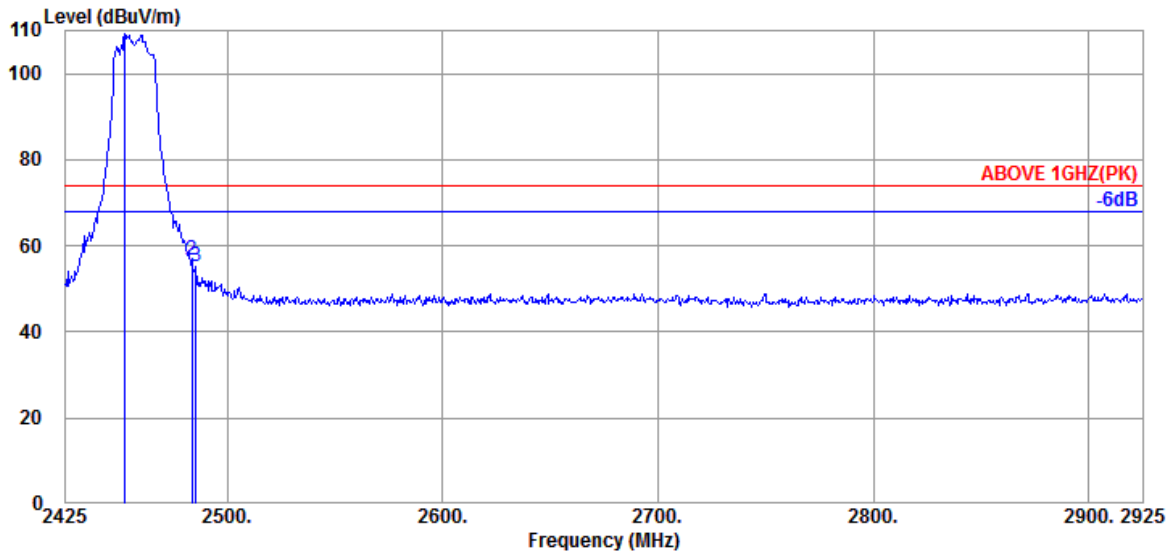

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.500	28.60	5.78	39.91	114.73	109.20	---	---	Peak
2483.500	28.60	5.83	39.91	62.34	56.86	74.00	17.14	Peak
2485.500	28.60	5.83	39.91	60.70	55.22	74.00	18.78	Peak

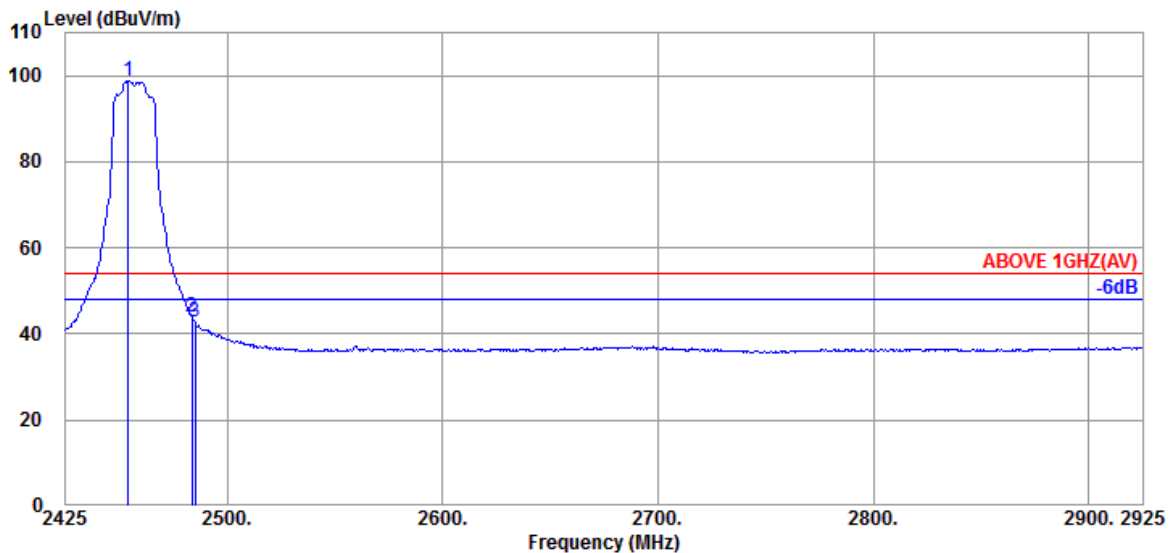


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	28.60	5.81	39.91	104.21	98.71	---	---	Average
2483.500	28.60	5.83	39.91	49.43	43.95	54.00	10.05	Average
2485.000	28.60	5.83	39.91	48.12	42.64	54.00	11.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

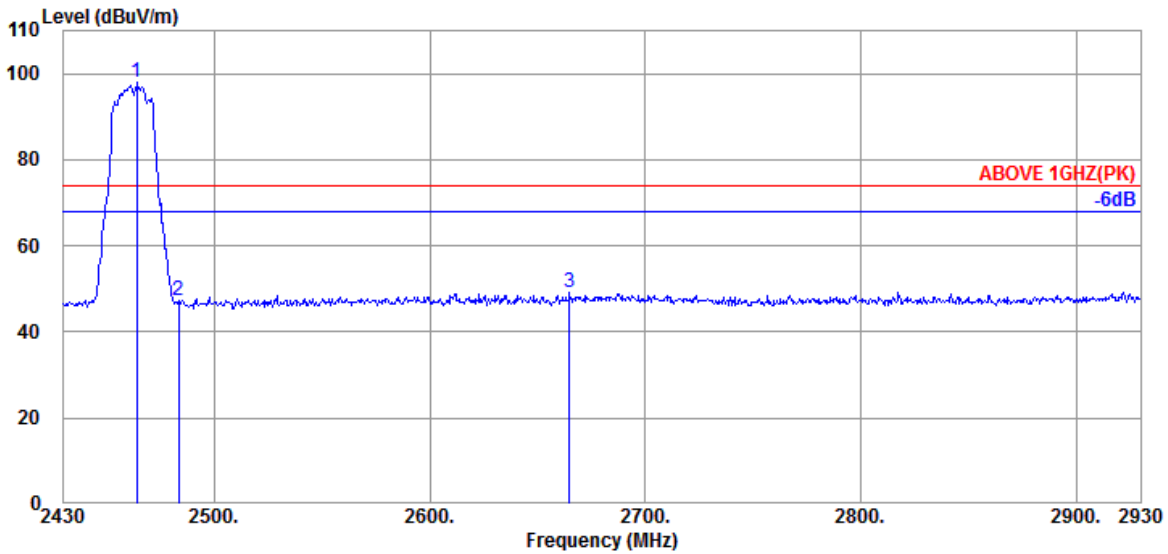

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.60	5.81	39.91	103.54	98.04	---	---	Peak
2483.500	28.60	5.83	39.91	52.76	47.28	74.00	26.72	Peak
2665.000	28.96	6.07	39.95	54.27	49.35	74.00	24.65	Peak

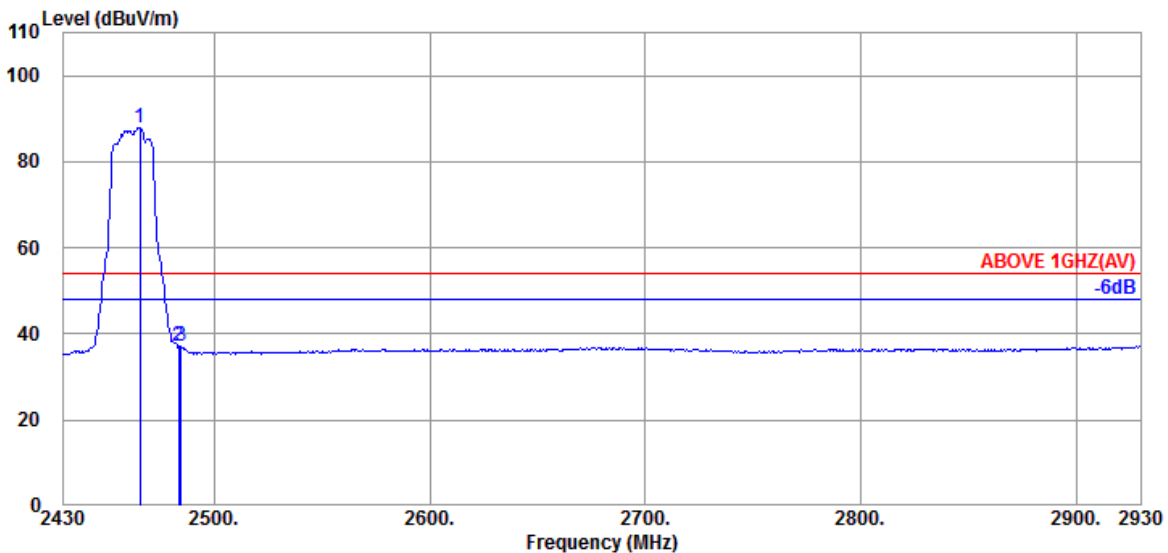


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.60	5.81	39.91	93.24	87.74	---	---	Average
2483.500	28.60	5.83	39.91	42.49	37.01	54.00	16.99	Average
2484.500	28.60	5.83	39.91	42.55	37.07	54.00	16.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

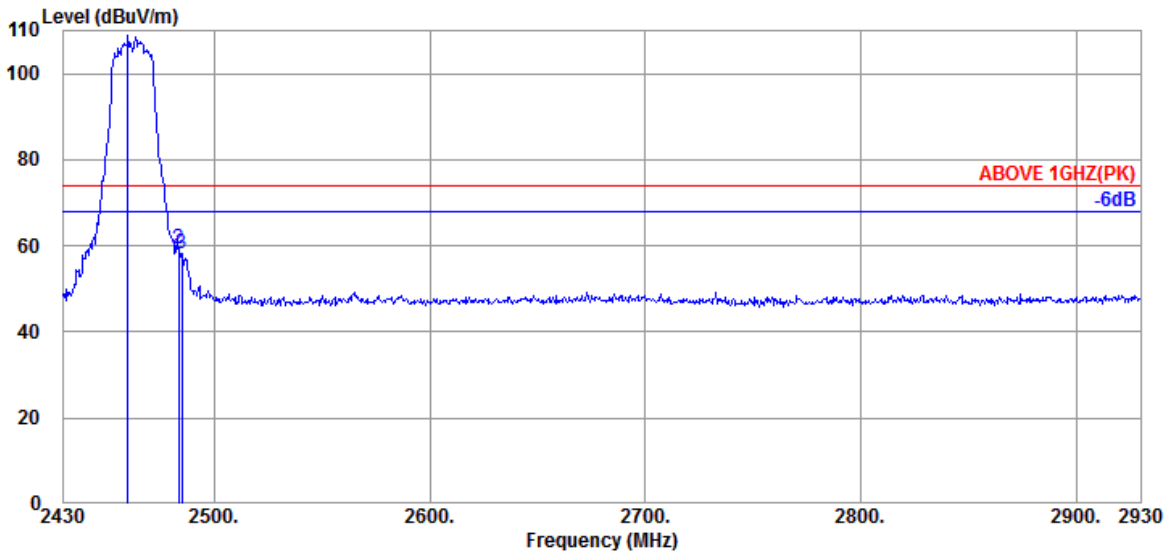

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	28.60	5.81	39.91	114.42	108.92	---	---	Peak
2483.500	28.60	5.83	39.91	64.80	59.32	74.00	14.68	Peak
2485.000	28.60	5.83	39.91	63.81	58.33	74.00	15.67	Peak

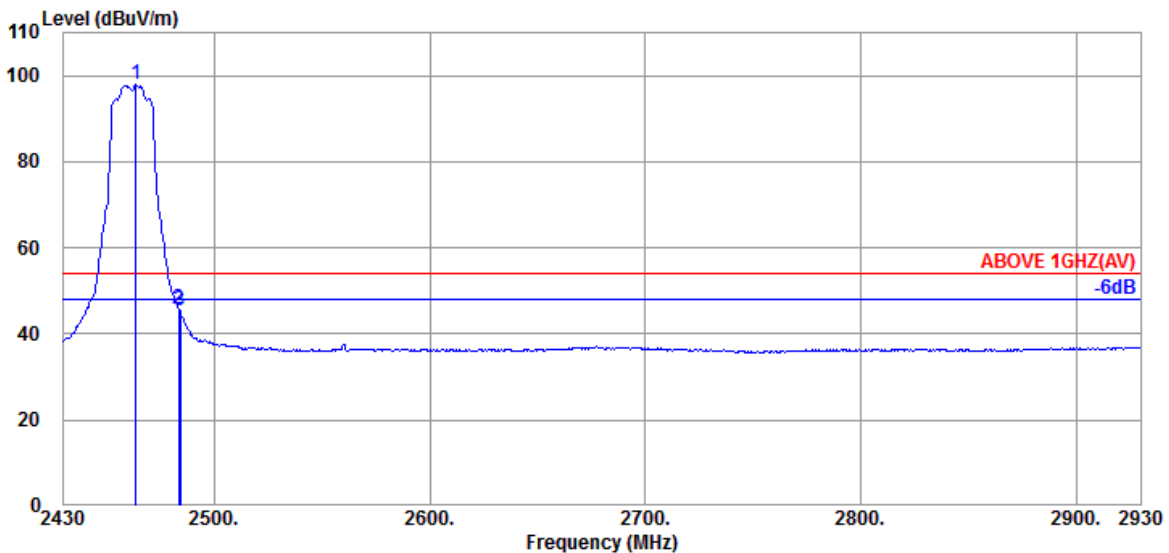


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.60	5.81	39.91	103.34	97.84	---	---	Average
2483.500	28.60	5.83	39.91	51.27	45.79	54.00	8.21	Average
2484.000	28.60	5.83	39.91	50.74	45.26	54.00	8.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

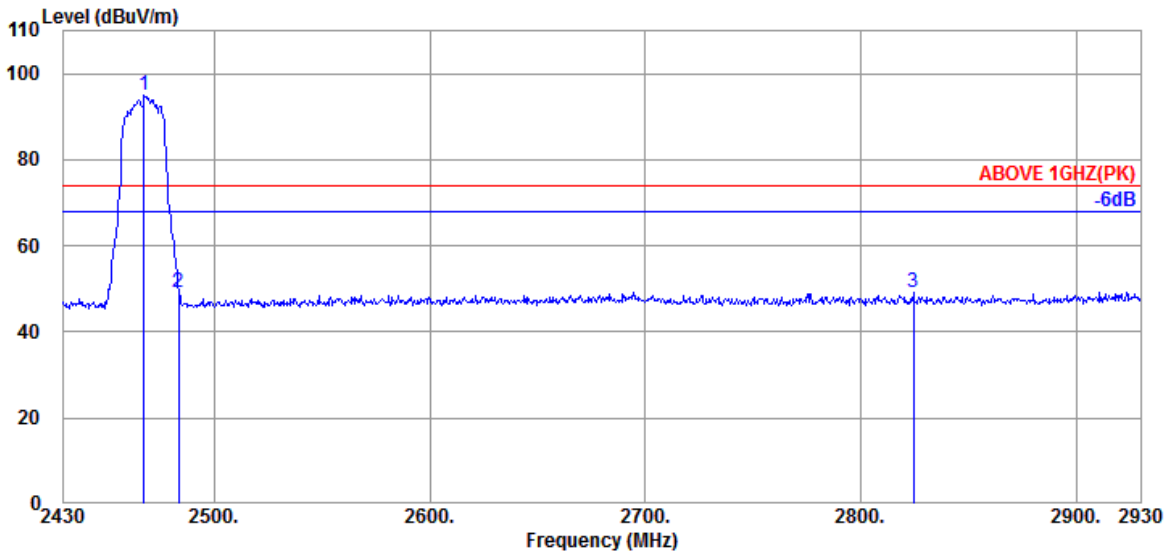

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.60	5.81	39.91	100.36	94.86	---	---	Peak
2483.500	28.60	5.83	39.91	54.58	49.10	74.00	24.90	Peak
2824.500	29.30	6.26	39.99	53.77	49.34	74.00	24.66	Peak

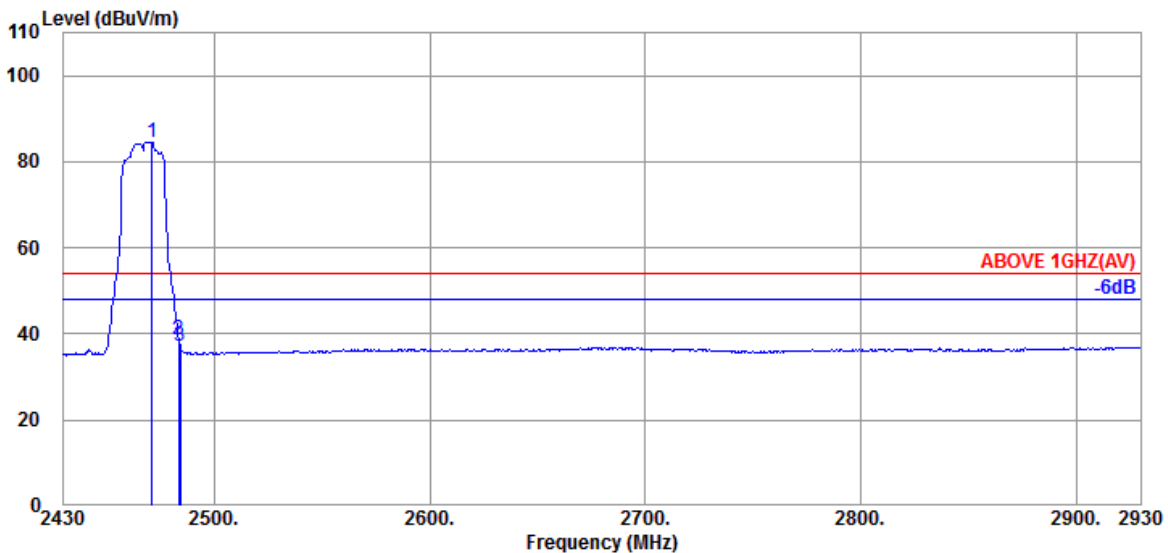


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.60	5.83	39.91	90.14	84.66	---	---	Average
2483.500	28.60	5.83	39.91	43.99	38.51	54.00	15.49	Average
2484.000	28.60	5.83	39.91	42.76	37.28	54.00	16.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

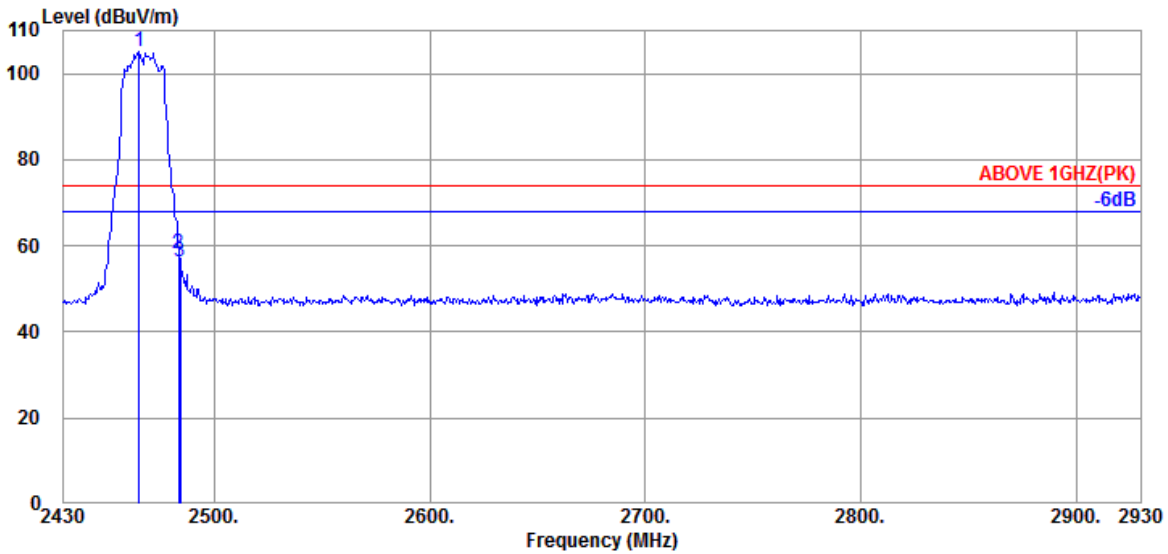

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.60	5.81	39.91	110.66	105.16	---	---	Peak
2483.500	28.60	5.83	39.91	63.56	58.08	74.00	15.92	Peak
2484.000	28.60	5.83	39.91	61.65	56.17	74.00	17.83	Peak

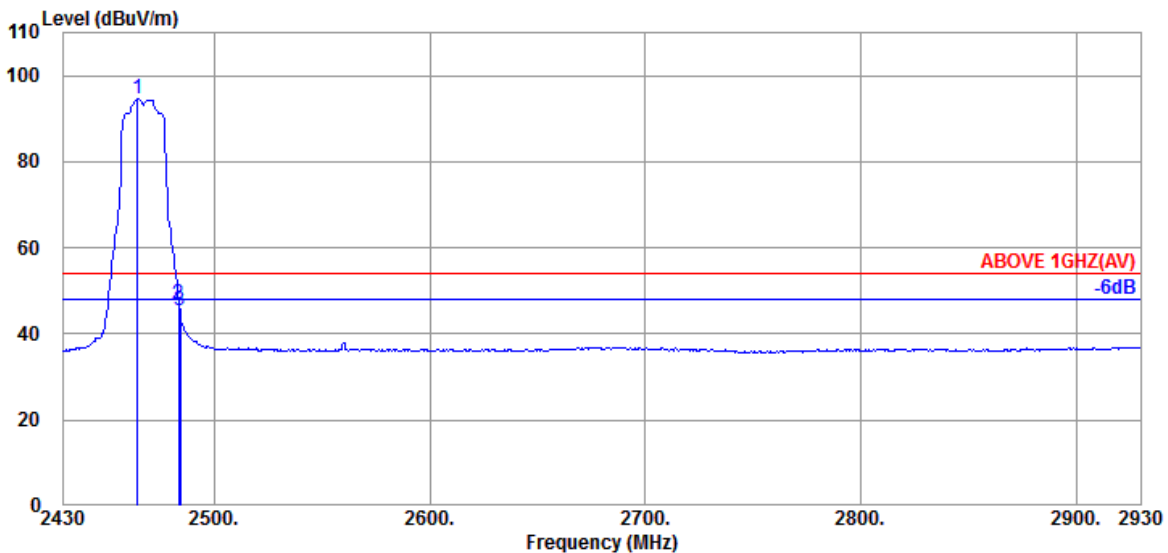


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.60	5.81	39.91	99.98	94.48	---	---	Average
2483.500	28.60	5.83	39.91	52.29	46.81	54.00	7.19	Average
2484.000	28.60	5.83	39.91	51.04	45.56	54.00	8.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

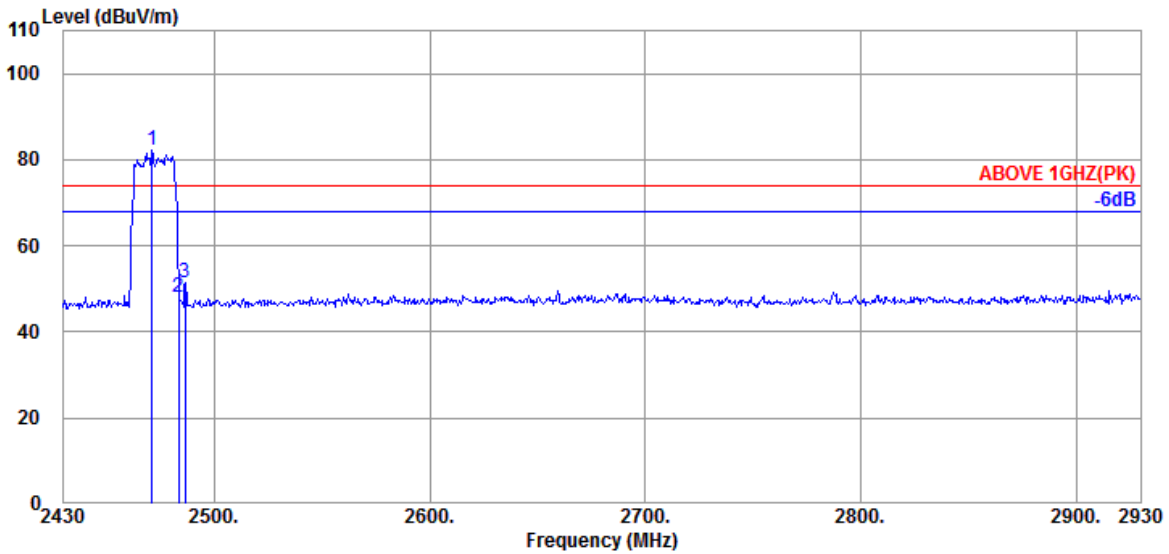

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.000	28.60	5.83	39.91	87.56	82.08	---	---	Peak
2483.500	28.60	5.83	39.91	53.40	47.92	74.00	26.08	Peak
2486.500	28.60	5.83	39.91	56.82	51.34	74.00	22.66	Peak

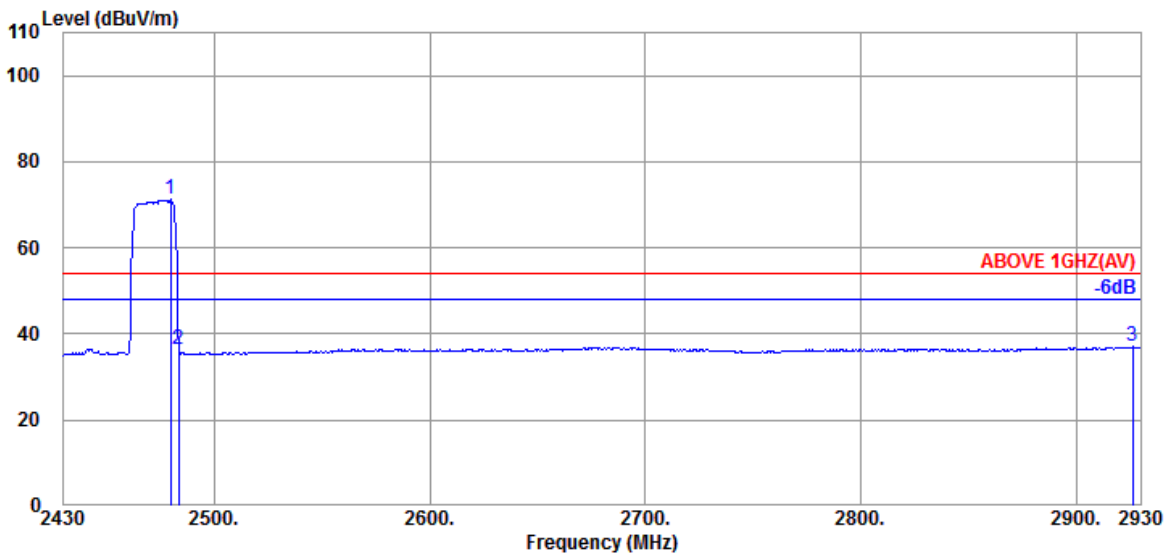


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.500	28.60	5.83	39.91	76.65	71.17	---	---	Average
2483.500	28.60	5.83	39.91	41.89	36.41	54.00	17.59	Average
2926.500	29.80	6.38	40.01	40.92	37.09	54.00	16.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

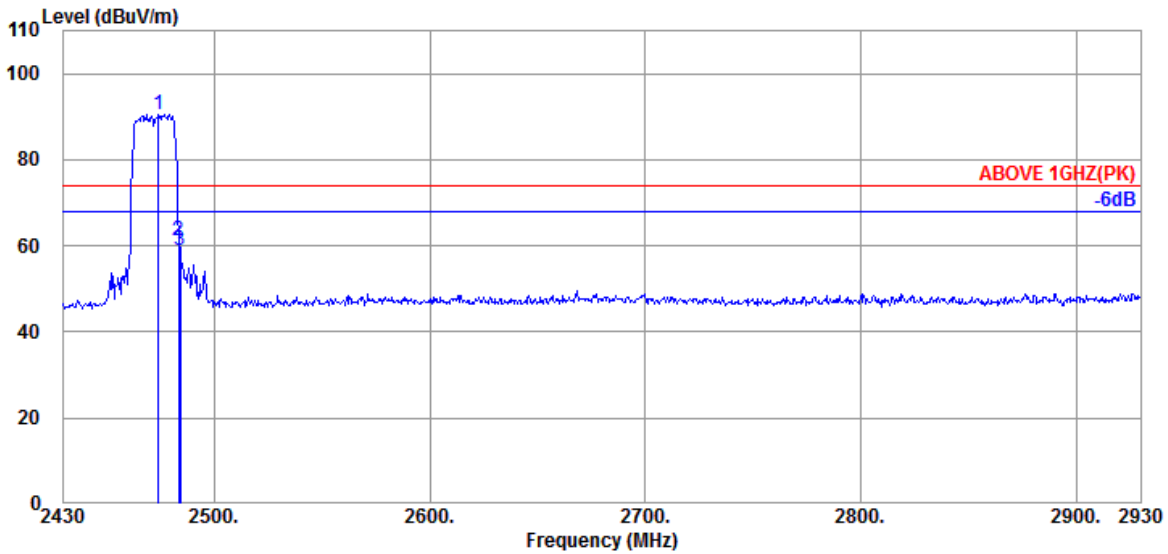

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.000	28.60	5.83	39.91	96.10	90.62	---	---	Peak
2483.500	28.60	5.83	39.91	66.86	61.38	74.00	12.62	Peak
2484.000	28.60	5.83	39.91	64.56	59.08	74.00	14.92	Peak

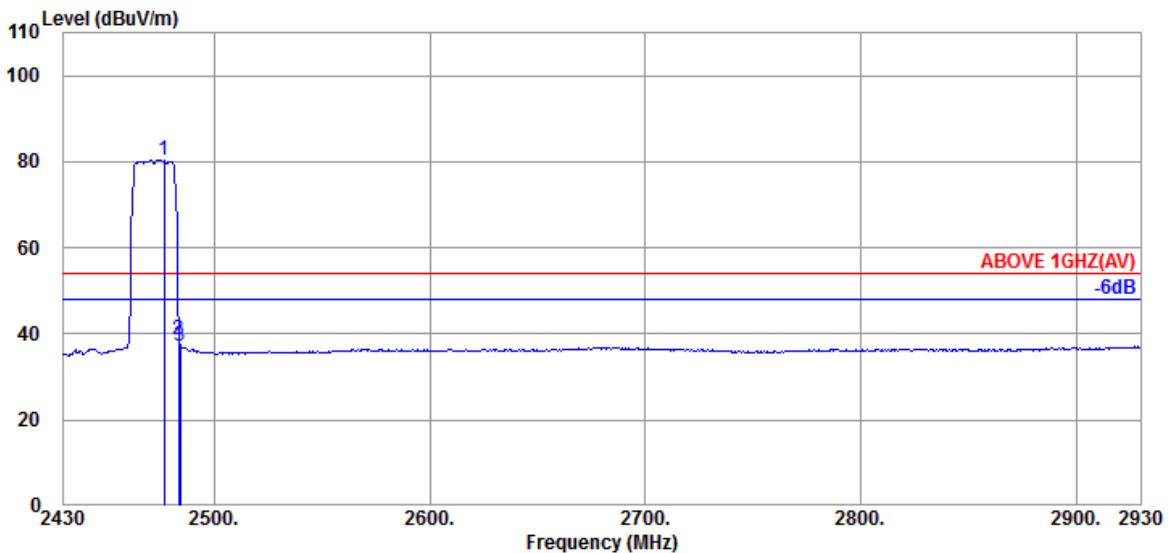


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.60	5.83	39.91	85.94	80.46	---	---	Average
2483.500	28.60	5.83	39.91	44.17	38.69	54.00	15.31	Average
2484.000	28.60	5.83	39.91	42.72	37.24	54.00	16.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

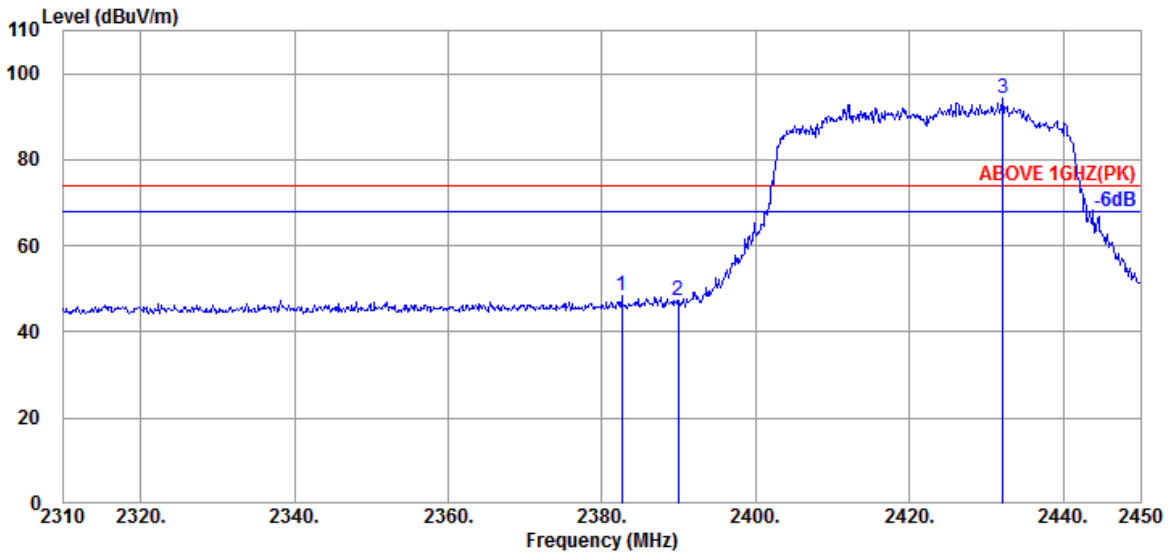

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.520	28.26	5.68	39.91	54.24	48.27	74.00	25.73	Peak
2389.940	28.27	5.70	39.91	53.34	47.40	74.00	26.60	Peak
@ 2432.080	28.47	5.76	39.91	99.87	94.19	---	---	Peak

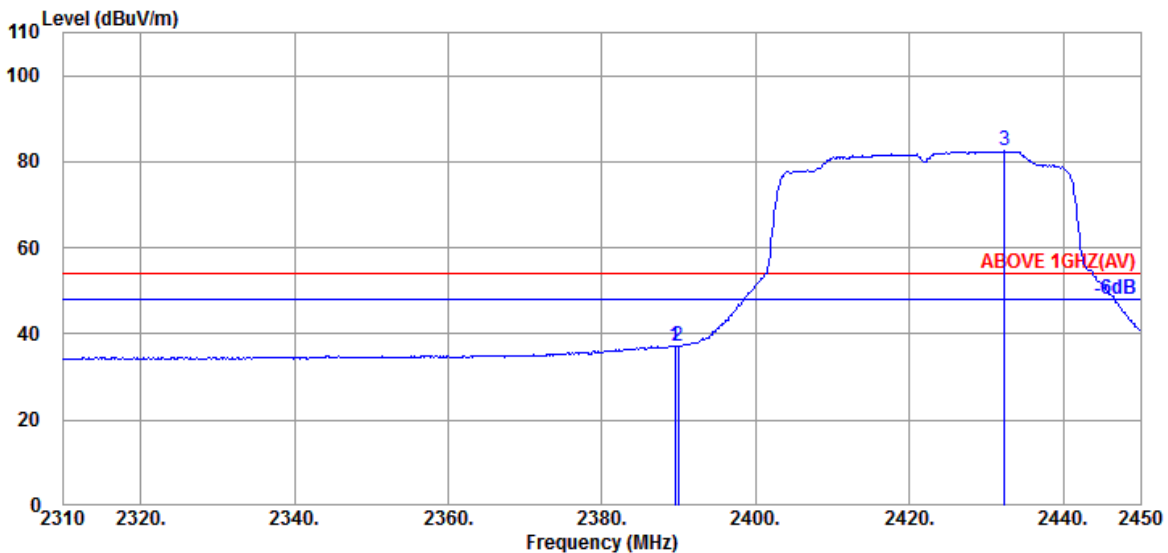


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	43.23	37.29	54.00	16.71	Average
2389.940	28.27	5.70	39.91	42.94	37.00	54.00	17.00	Average
@ 2432.360	28.51	5.76	39.91	88.10	82.46	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

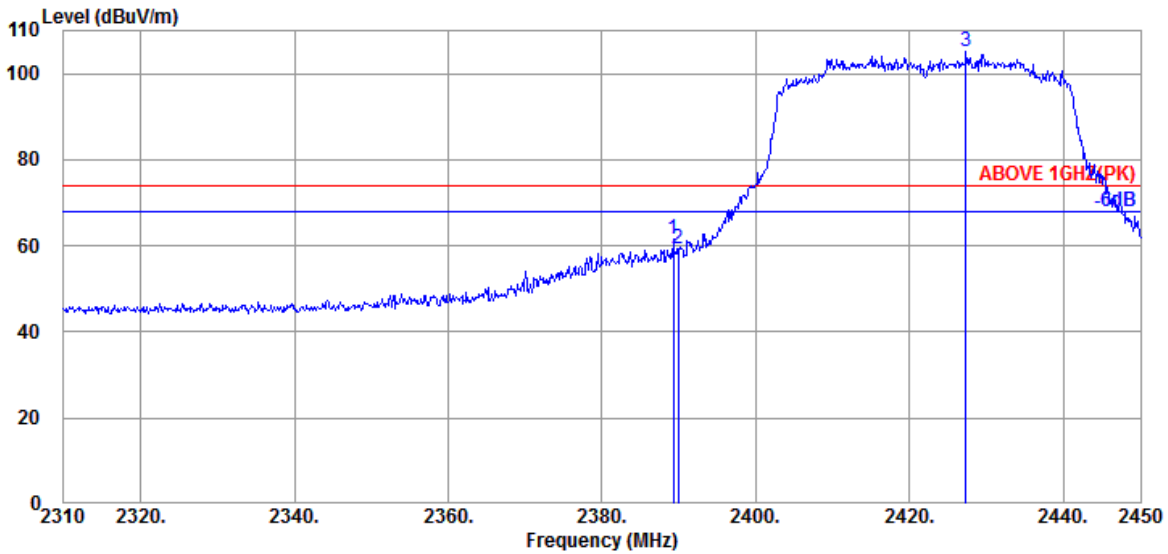

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.240	28.27	5.70	39.91	67.59	61.65	74.00	12.35	Peak
2389.940	28.27	5.70	39.91	65.38	59.44	74.00	14.56	Peak
@ 2427.320	28.47	5.76	39.91	110.77	105.09	---	---	Peak

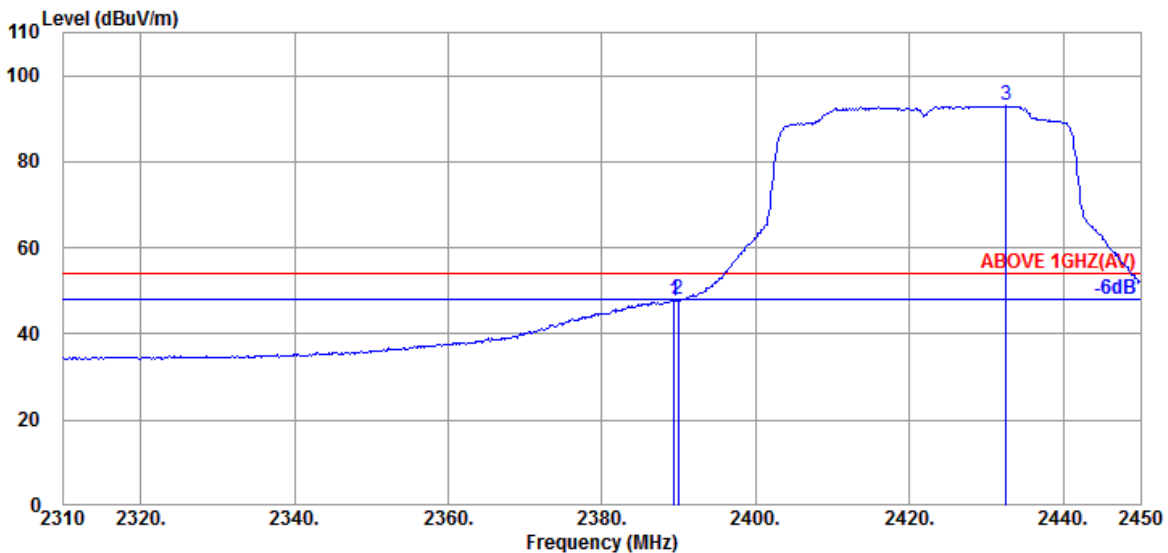


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.380	28.27	5.70	39.91	53.73	47.79	54.00	6.21	Average
2389.940	28.27	5.70	39.91	53.84	47.90	54.00	6.10	Average
@ 2432.500	28.51	5.76	39.91	98.58	92.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

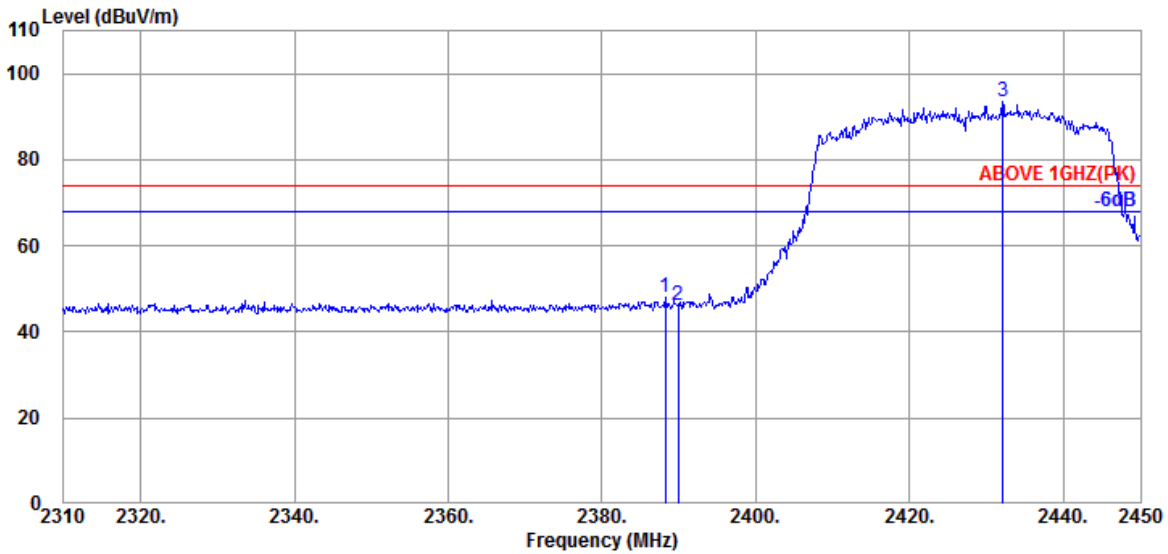

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.260	28.27	5.70	39.91	53.88	47.94	74.00	26.06	Peak
2389.940	28.27	5.70	39.91	52.14	46.20	74.00	27.80	Peak
@ 2432.080	28.47	5.76	39.91	99.17	93.49	---	---	Peak

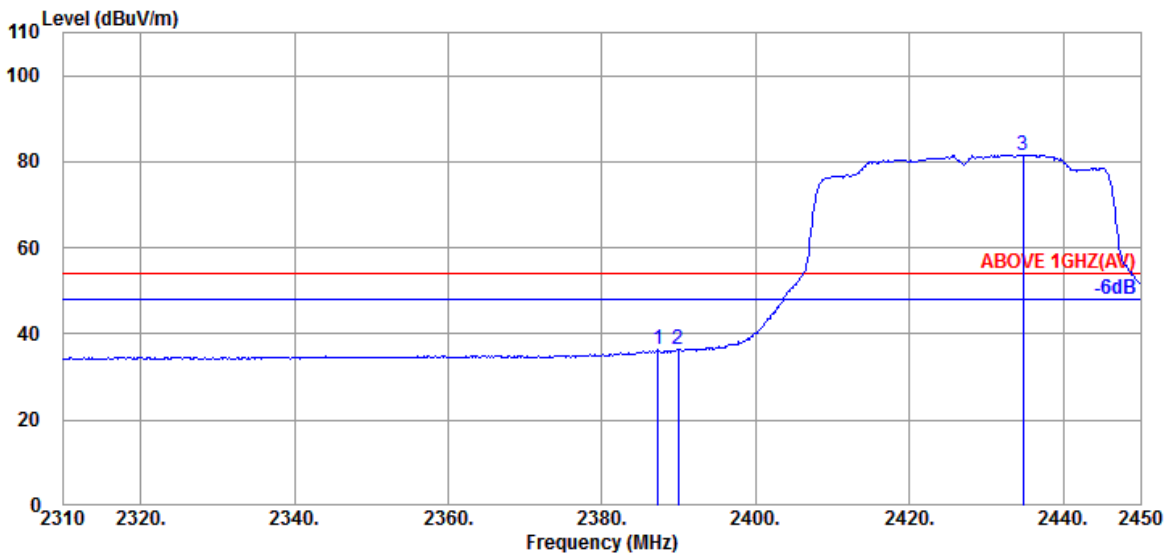


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.280	28.27	5.70	39.91	42.32	36.38	54.00	17.62	Average
2389.940	28.27	5.70	39.91	42.38	36.44	54.00	17.56	Average
@ 2434.740	28.51	5.76	39.91	87.28	81.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

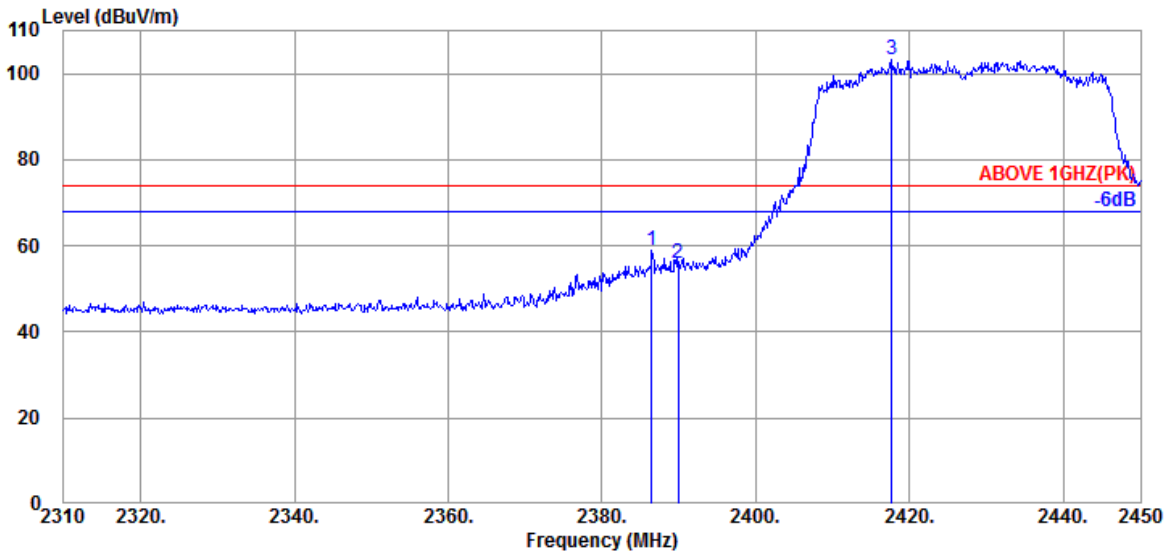

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.440	28.27	5.70	39.91	64.75	58.81	74.00	15.19	Peak
2389.940	28.27	5.70	39.91	61.90	55.96	74.00	18.04	Peak
@ 2417.660	28.39	5.73	39.91	109.16	103.37	---	---	Peak

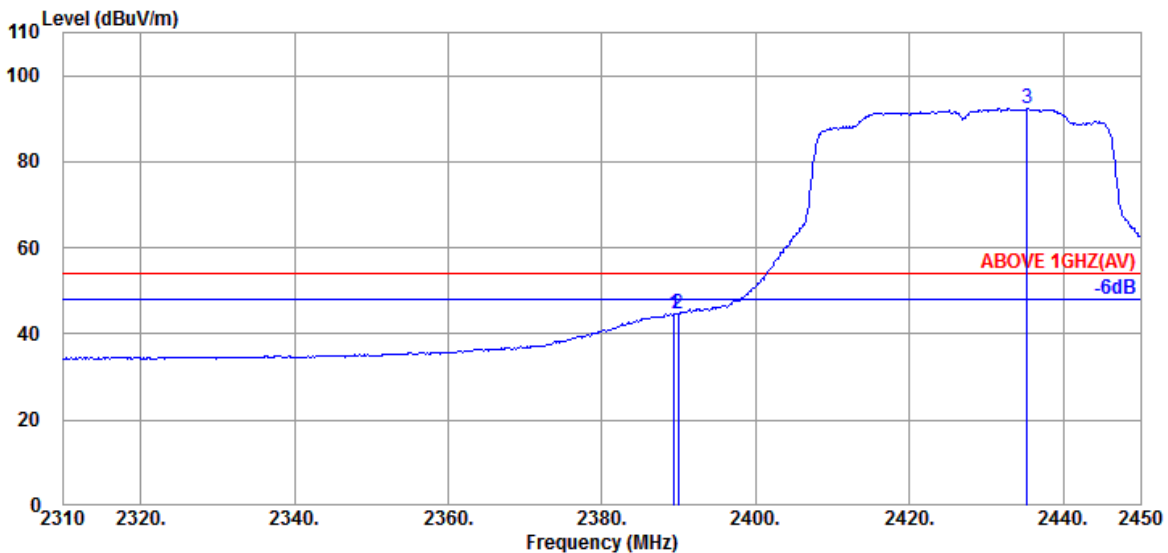


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.380	28.27	5.70	39.91	50.67	44.73	54.00	9.27	Average
2389.940	28.27	5.70	39.91	50.74	44.80	54.00	9.20	Average
@ 2435.300	28.51	5.76	39.91	97.89	92.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

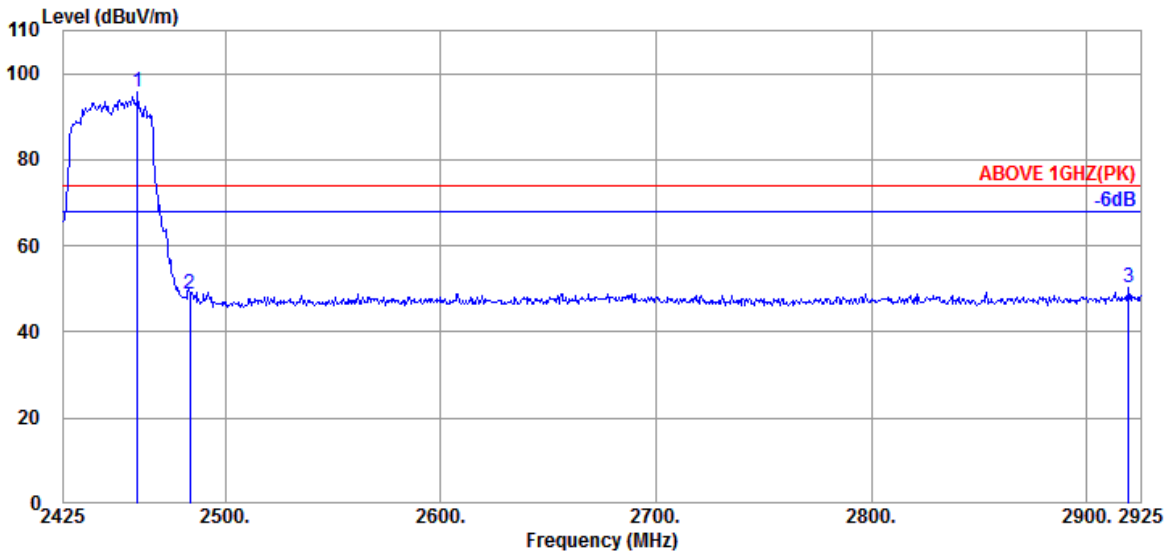

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	28.60	5.81	39.91	101.24	95.74	---	---	Peak
2483.500	28.60	5.83	39.91	54.20	48.72	74.00	25.28	Peak
2919.500	29.75	6.38	40.01	54.01	50.13	74.00	23.87	Peak

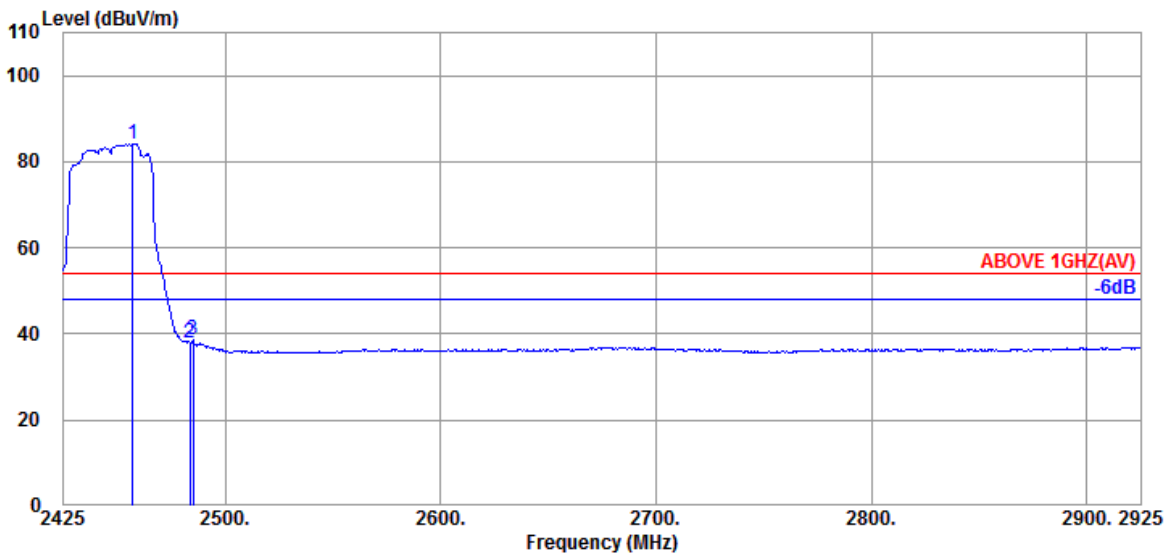


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	28.60	5.81	39.91	89.67	84.17	---	---	Average
2483.500	28.60	5.83	39.91	43.52	38.04	54.00	15.96	Average
2485.000	28.60	5.83	39.91	43.96	38.48	54.00	15.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

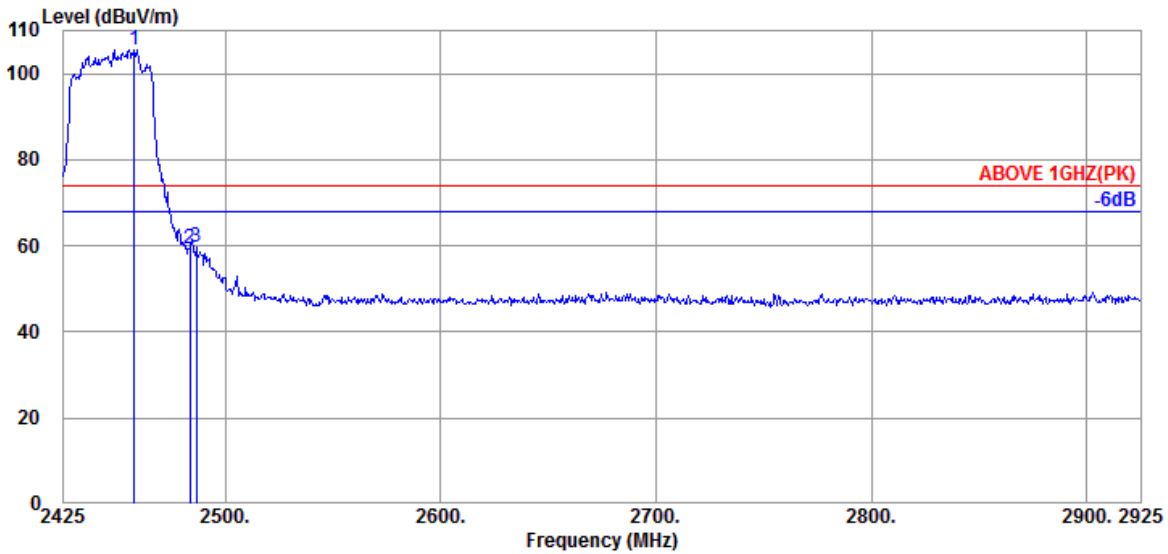

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	28.60	5.81	39.91	111.00	105.50	---	---	Peak
2483.500	28.60	5.83	39.91	64.96	59.48	74.00	14.52	Peak
2486.500	28.60	5.83	39.91	64.99	59.51	74.00	14.49	Peak

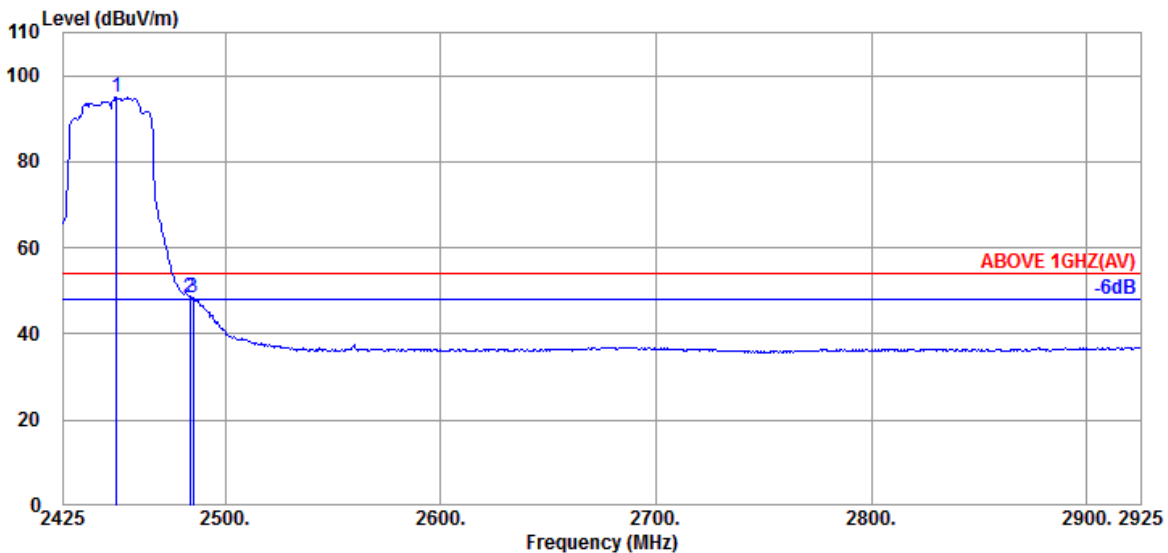


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.500	28.60	5.78	39.91	100.48	94.95	---	---	Average
2483.500	28.60	5.83	39.91	53.96	48.48	54.00	5.52	Average
2485.000	28.60	5.83	39.91	53.81	48.33	54.00	5.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

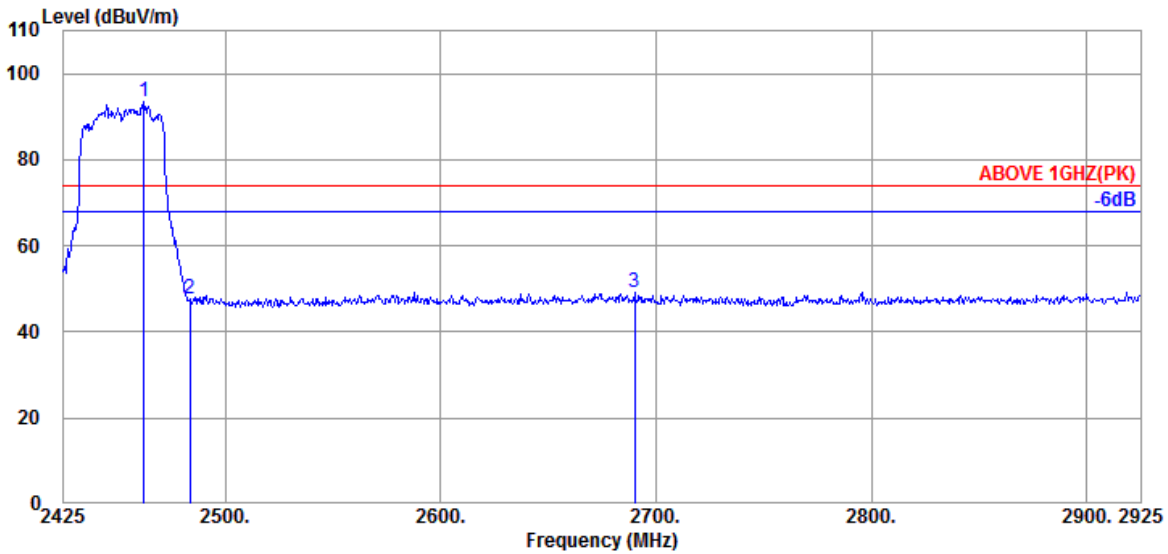

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.500	28.60	5.81	39.91	98.83	93.33	---	---	Peak
2483.500	28.60	5.83	39.91	53.25	47.77	74.00	26.23	Peak
2690.000	29.04	6.09	39.96	54.17	49.34	74.00	24.66	Peak

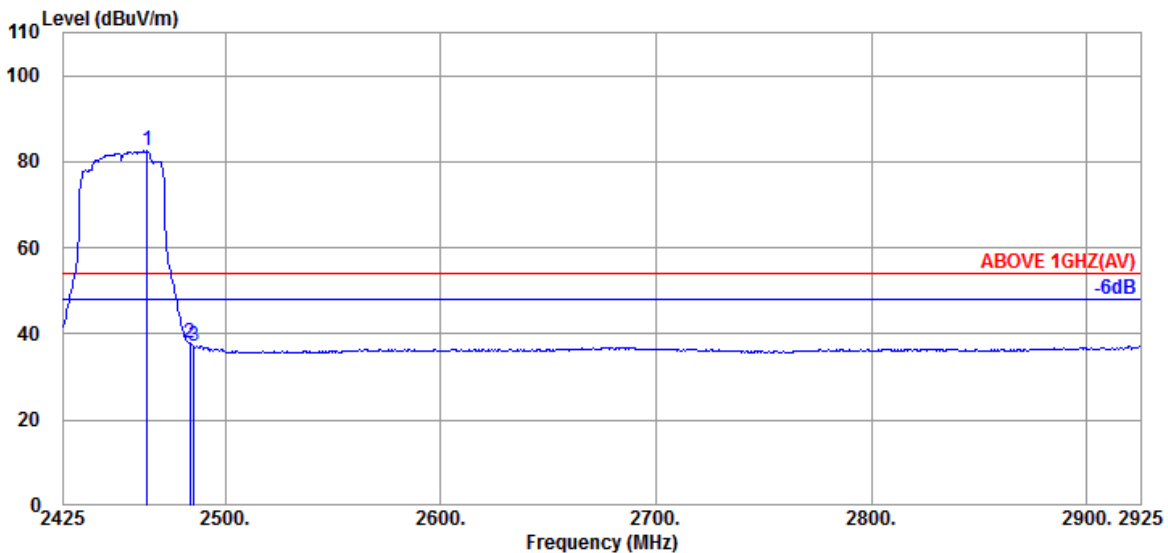


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.000	28.60	5.81	39.91	88.12	82.62	---	---	Average
2483.500	28.60	5.83	39.91	43.23	37.75	54.00	16.25	Average
2485.500	28.60	5.83	39.91	42.81	37.33	54.00	16.67	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

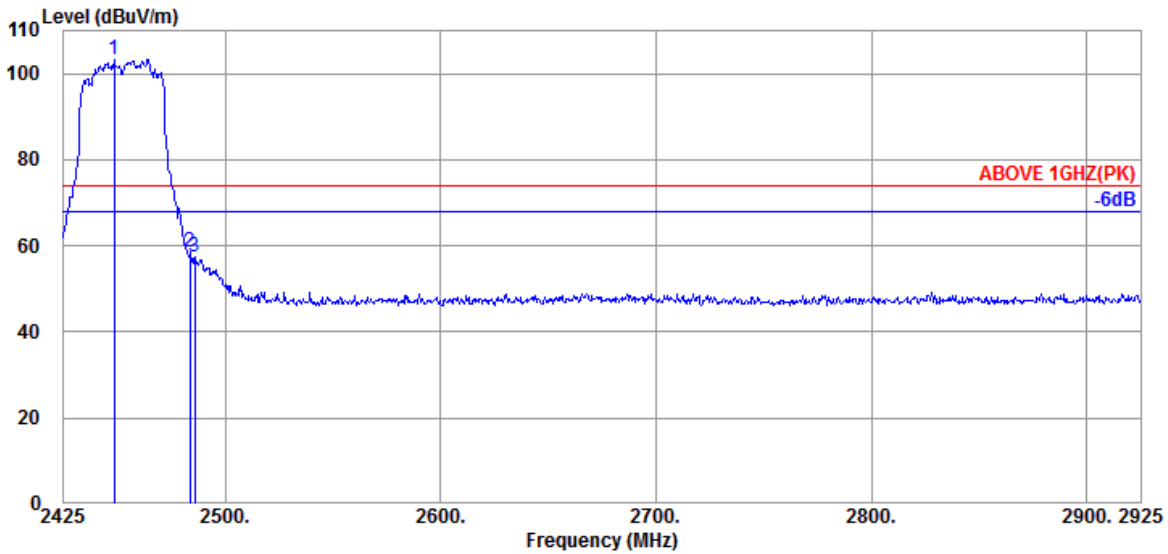

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.500	28.60	5.78	39.91	108.77	103.24	---	---	Peak
2483.500	28.60	5.83	39.91	63.97	58.49	74.00	15.51	Peak
2486.000	28.60	5.83	39.91	62.96	57.48	74.00	16.52	Peak

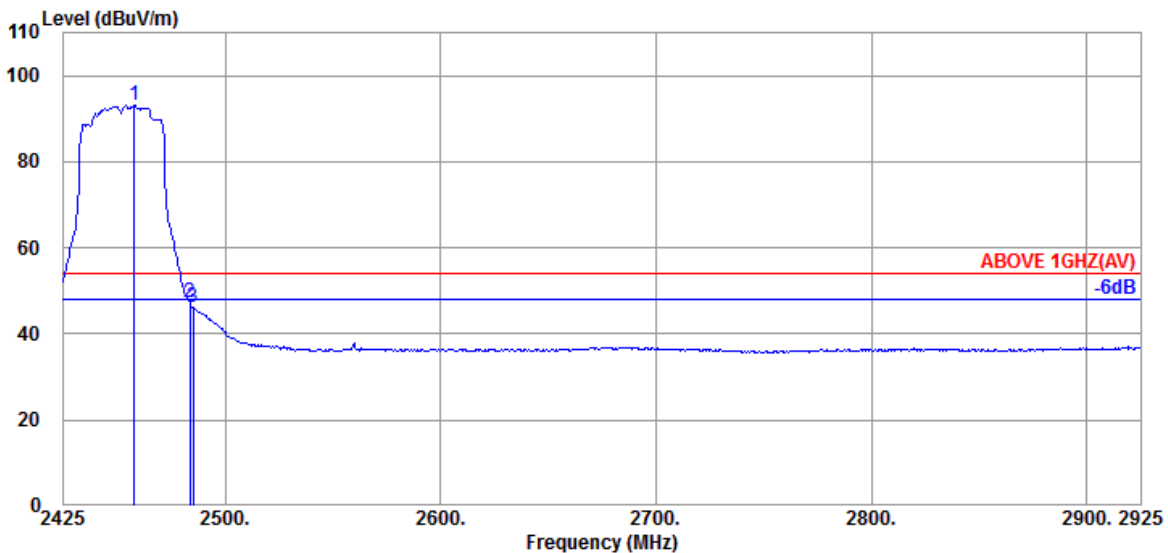


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.000	28.60	5.81	39.91	98.51	93.01	---	---	Average
2483.500	28.60	5.83	39.91	52.80	47.32	54.00	6.68	Average
2485.000	28.60	5.83	39.91	51.48	46.00	54.00	8.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

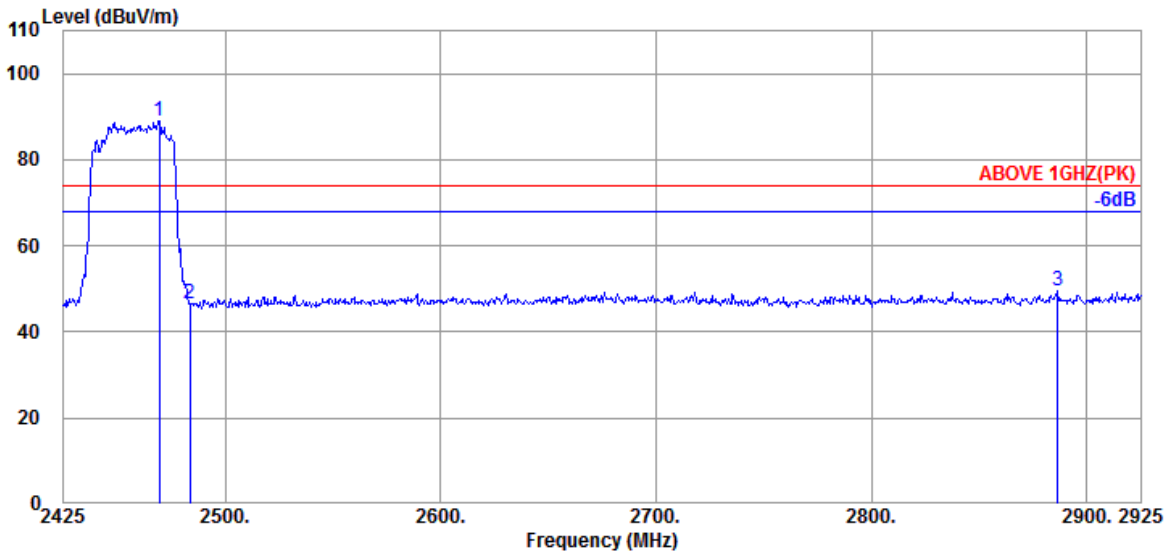

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.60	5.81	39.91	94.51	89.01	---	---	Peak
2483.500	28.60	5.83	39.91	52.12	46.64	74.00	27.36	Peak
2886.500	29.57	6.34	40.00	53.74	49.65	74.00	24.35	Peak

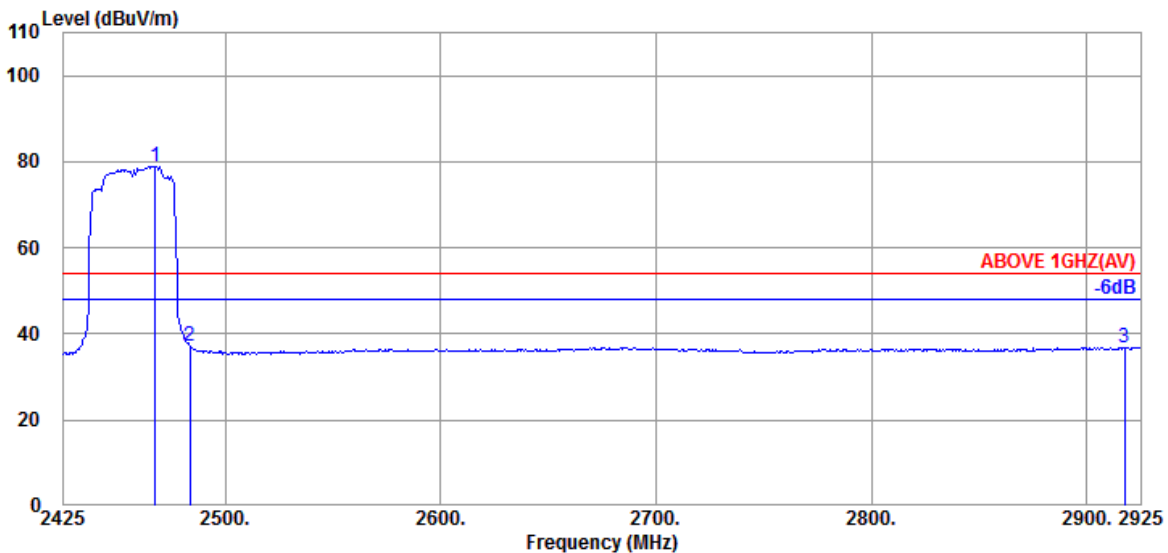


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.60	5.81	39.91	84.38	78.88	---	---	Average
2483.500	28.60	5.83	39.91	42.79	37.31	54.00	16.69	Average
2917.500	29.70	6.38	40.01	40.82	36.89	54.00	17.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

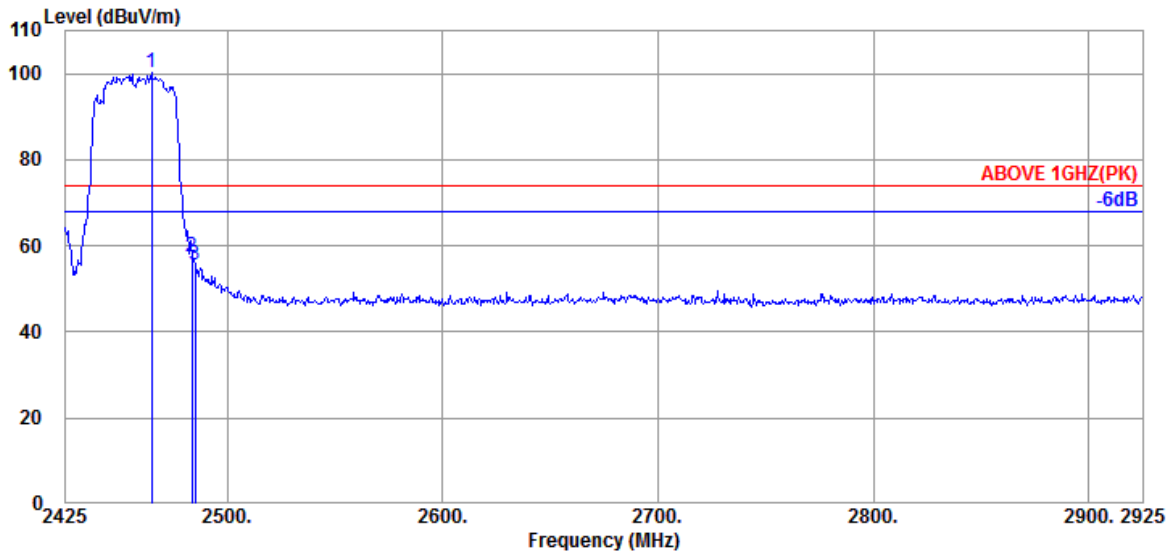

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.60	5.81	39.91	105.78	100.28	---	---	Peak
2483.500	28.60	5.83	39.91	62.86	57.38	74.00	16.62	Peak
2485.000	28.60	5.83	39.91	61.10	55.62	74.00	18.38	Peak

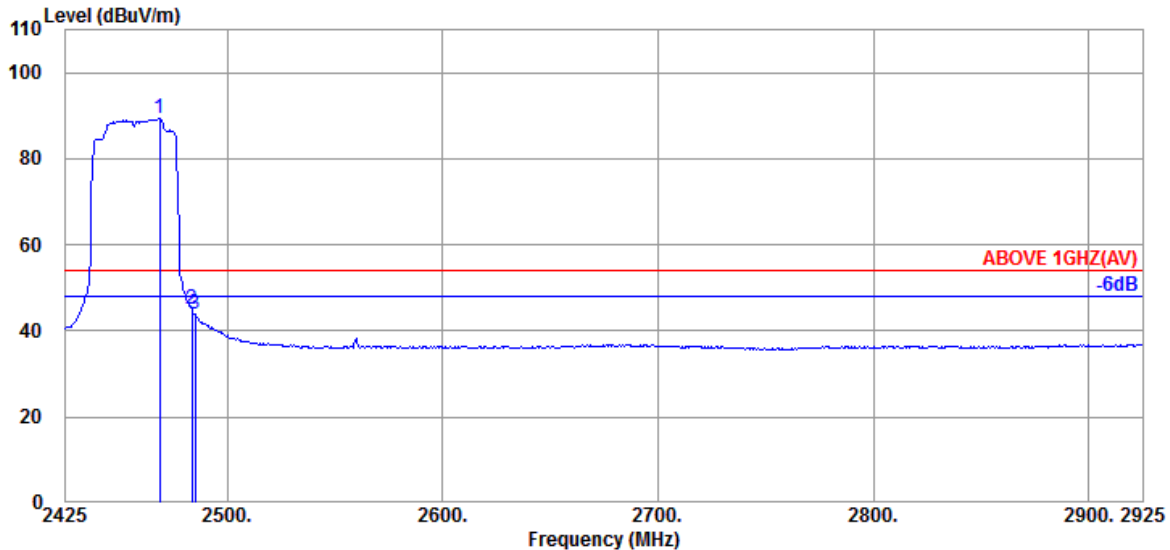


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.60	5.81	39.91	94.90	89.40	---	---	Average
2483.500	28.60	5.83	39.91	50.39	44.91	54.00	9.09	Average
2485.000	28.60	5.83	39.91	49.39	43.91	54.00	10.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

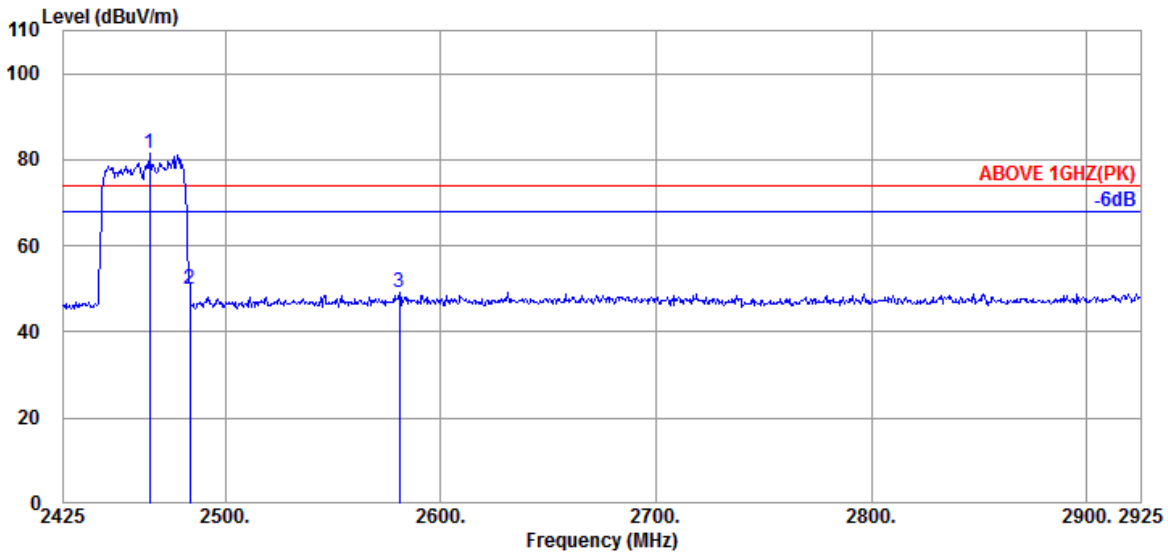

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.60	5.81	39.91	87.10	81.60	---	---	Peak
2483.500	28.60	5.83	39.91	55.27	49.79	74.00	24.21	Peak
2581.000	28.93	5.97	39.93	54.31	49.28	74.00	24.72	Peak

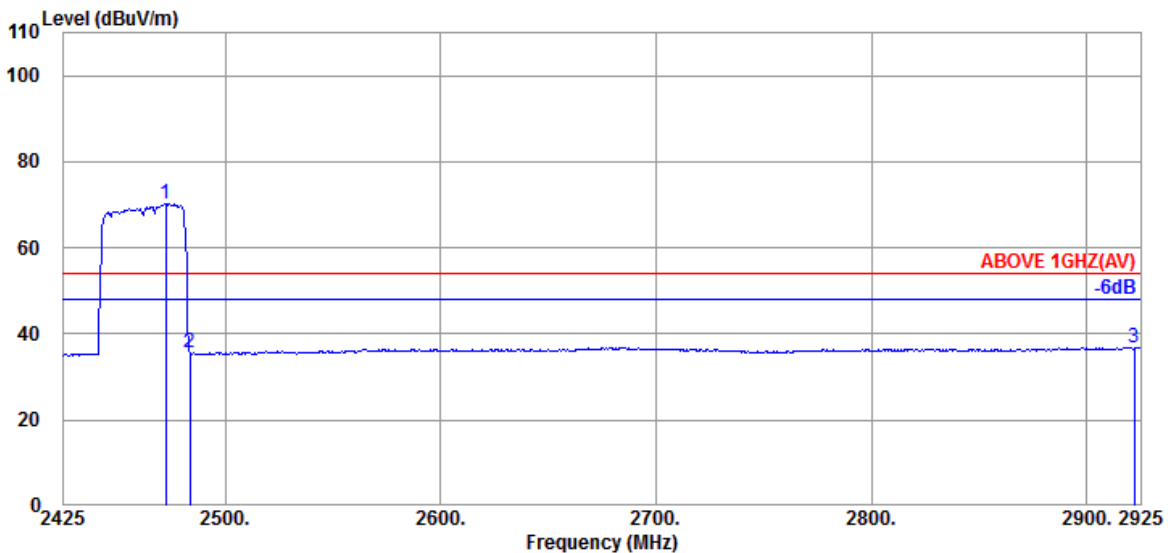


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.500	28.60	5.83	39.91	75.76	70.28	---	---	Average
2483.500	28.60	5.83	39.91	40.97	35.49	54.00	18.51	Average
2922.000	29.75	6.38	40.01	40.81	36.93	54.00	17.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

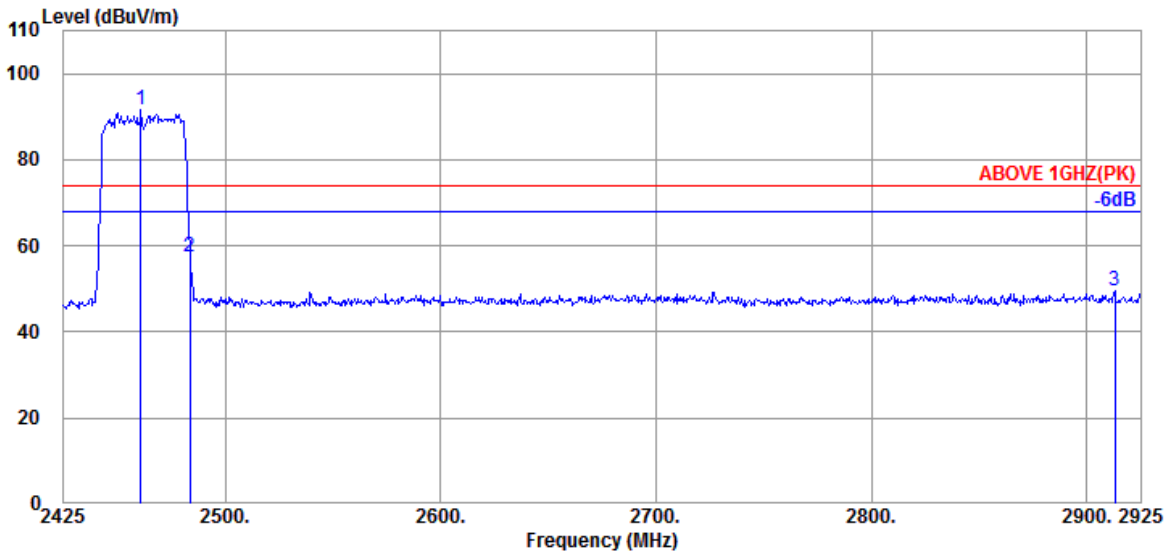

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.60	5.81	39.91	97.22	91.72	---	---	Peak
2483.500	28.60	5.83	39.91	63.11	57.63	74.00	16.37	Peak
2913.000	29.70	6.38	40.01	53.41	49.48	74.00	24.52	Peak

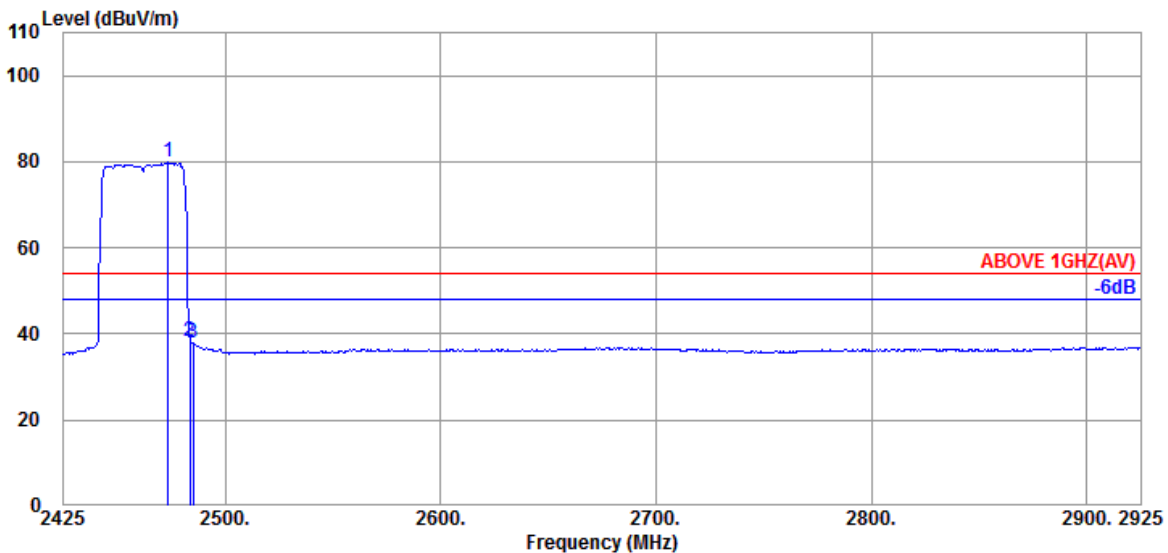


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.500	28.60	5.83	39.91	85.41	79.93	---	---	Average
2483.500	28.60	5.83	39.91	43.79	38.31	54.00	15.69	Average
2485.000	28.60	5.83	39.91	43.23	37.75	54.00	16.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

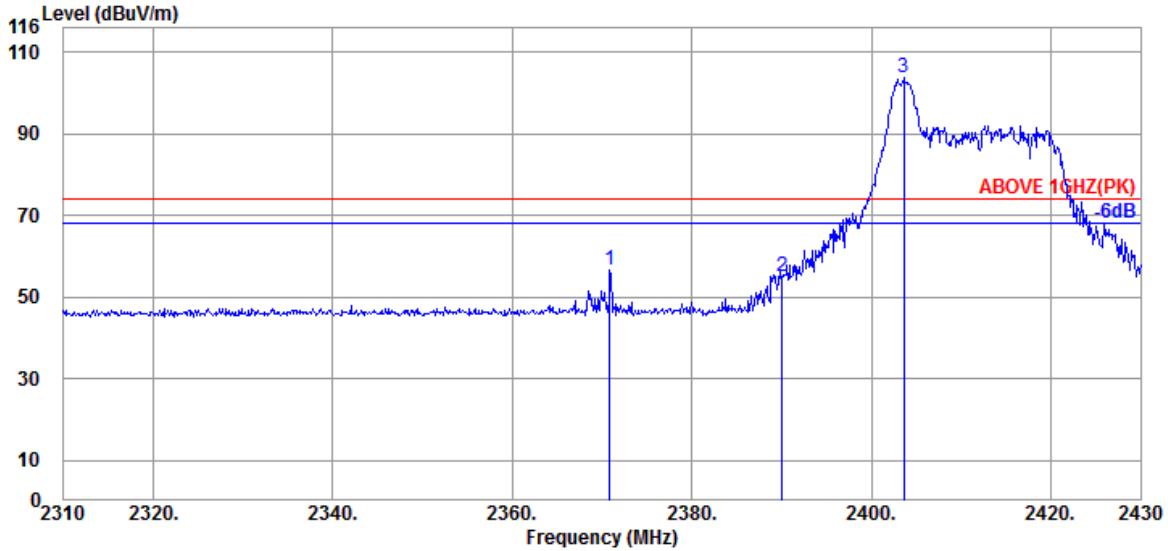

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.840	28.24	5.68	39.91	62.48	56.49	74.00	17.51	Peak
2390.040	28.27	5.70	39.91	60.85	54.91	74.00	19.09	Peak
@ 2403.600	28.30	5.73	39.91	109.80	103.92	---	---	Peak

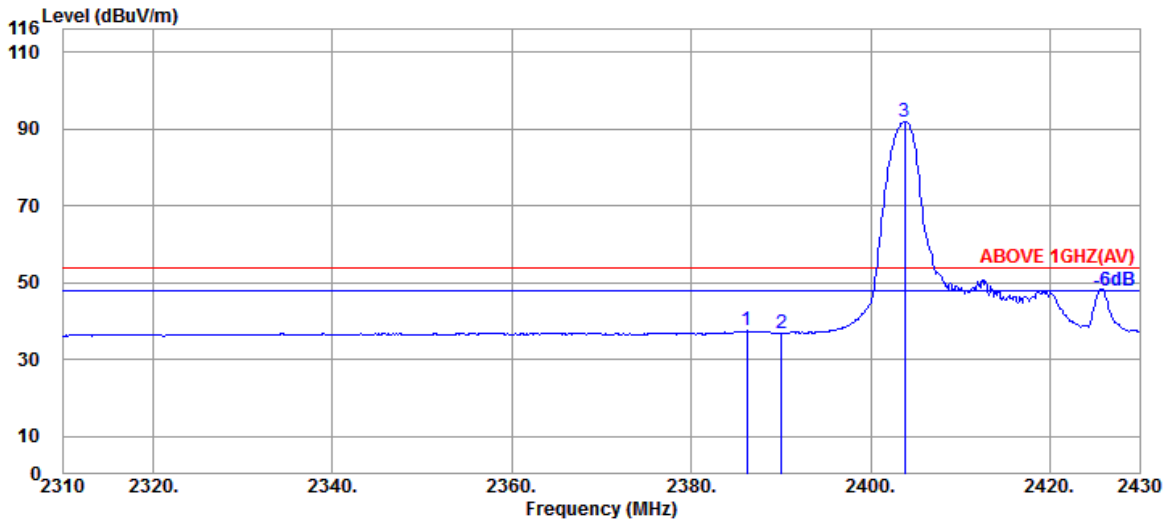


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	28.27	5.70	39.91	43.36	37.42	54.00	16.58	Average
2390.040	28.27	5.70	39.91	42.75	36.81	54.00	17.19	Average
@ 2403.840	28.30	5.73	39.91	97.85	91.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

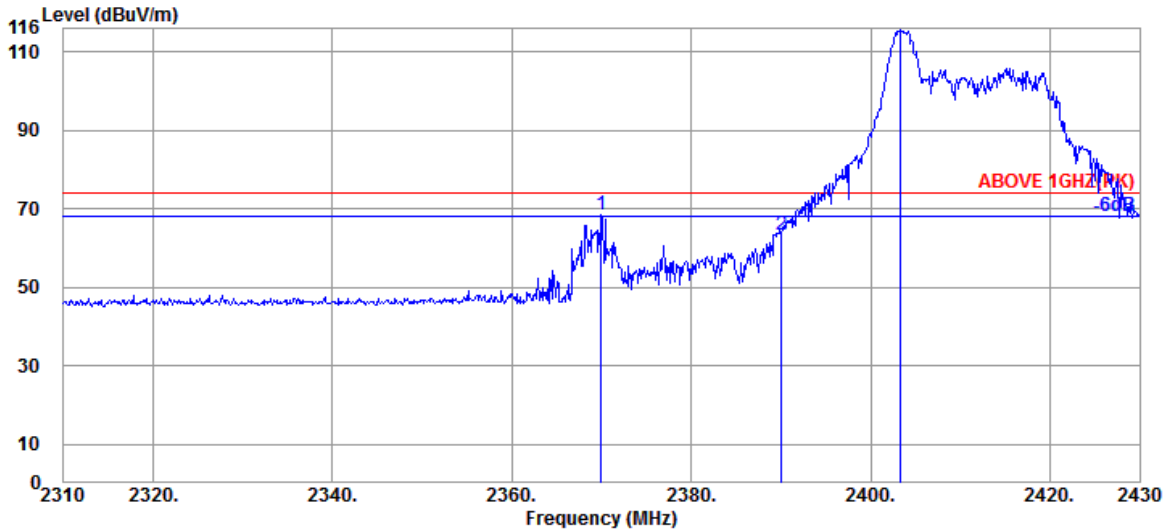

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.000	28.24	5.68	39.91	74.47	68.48	74.00	5.52	Peak
2390.040	28.27	5.70	39.91	69.41	63.47	74.00	10.53	Peak
@ 2403.240	28.30	5.73	39.91	121.47	115.59	---	---	Peak

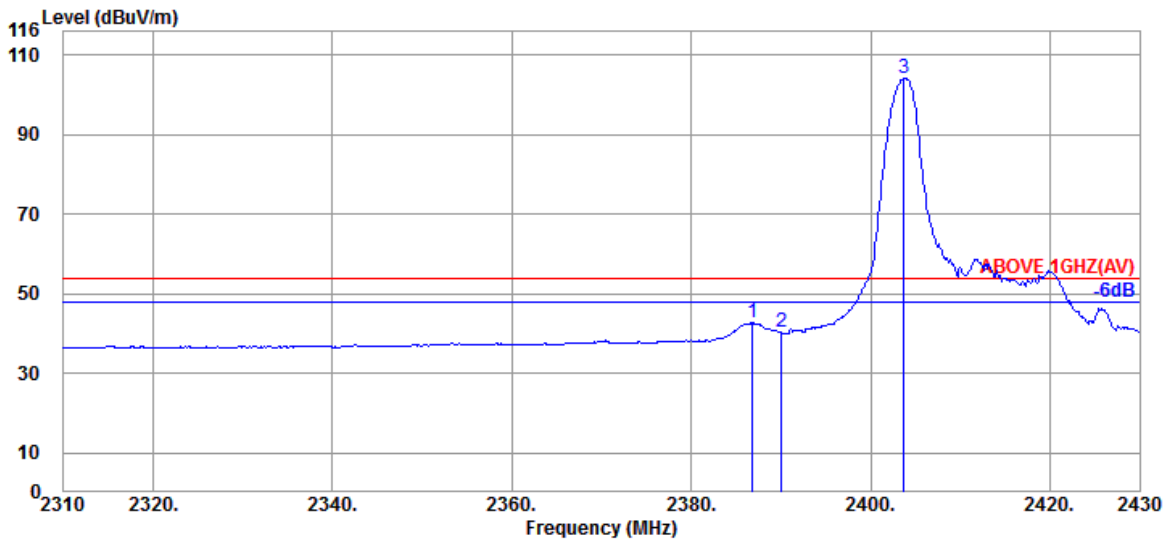


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.27	5.70	39.91	48.59	42.65	54.00	11.35	Average
2390.040	28.27	5.70	39.91	46.27	40.33	54.00	13.67	Average
@ 2403.720	28.30	5.73	39.91	110.09	104.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

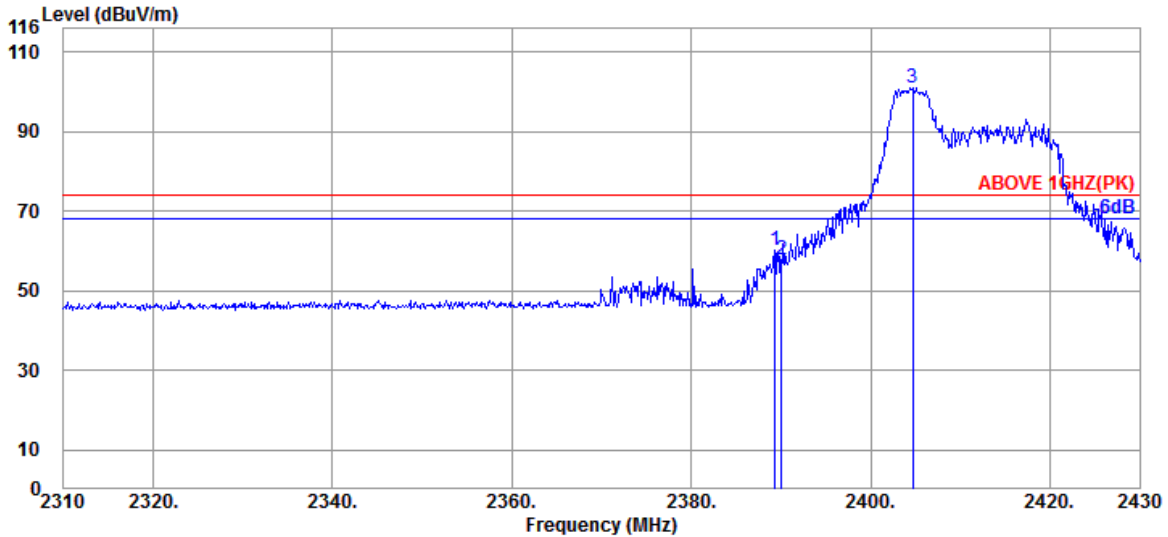

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.27	5.70	39.91	66.23	60.29	74.00	13.71	Peak
2390.040	28.27	5.70	39.91	63.83	57.89	74.00	16.11	Peak
@ 2404.680	28.34	5.73	39.91	106.95	101.11	---	---	Peak

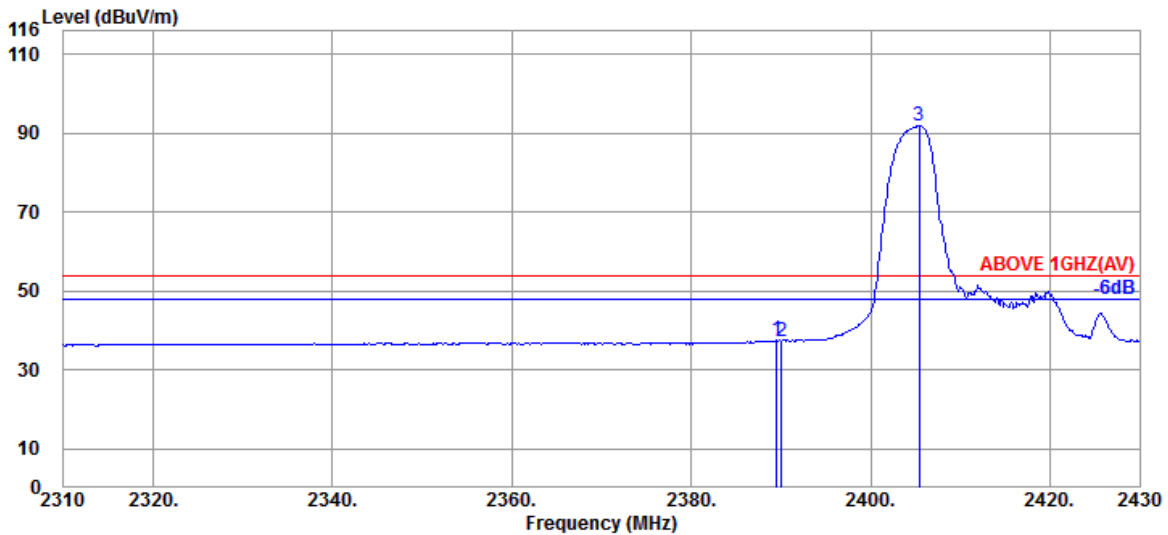


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	5.70	39.91	43.36	37.42	54.00	16.58	Average
2390.040	28.27	5.70	39.91	43.32	37.38	54.00	16.62	Average
@ 2405.400	28.34	5.73	39.91	97.55	91.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

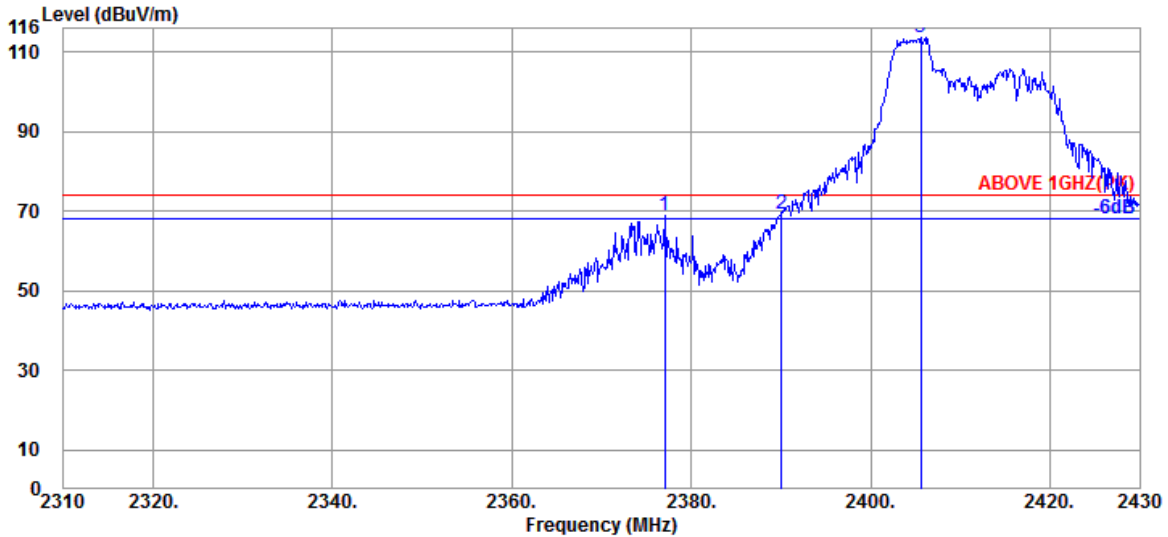

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2377.080	28.26	5.68	39.91	74.94	68.97	74.00	5.03	Peak
2390.040	28.27	5.70	39.91	75.14	69.20	74.00	4.80	Peak
@ 2405.640	28.34	5.73	39.91	119.47	113.63	---	---	Peak

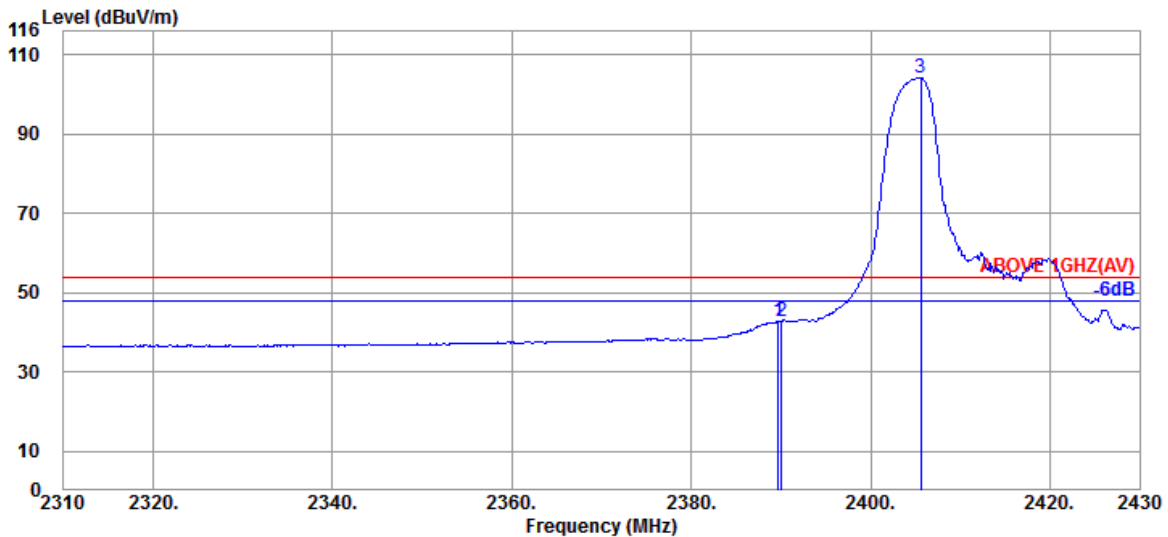


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.680	28.27	5.70	39.91	48.68	42.74	54.00	11.26	Average
2390.040	28.27	5.70	39.91	48.79	42.85	54.00	11.15	Average
@ 2405.640	28.34	5.73	39.91	110.07	104.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

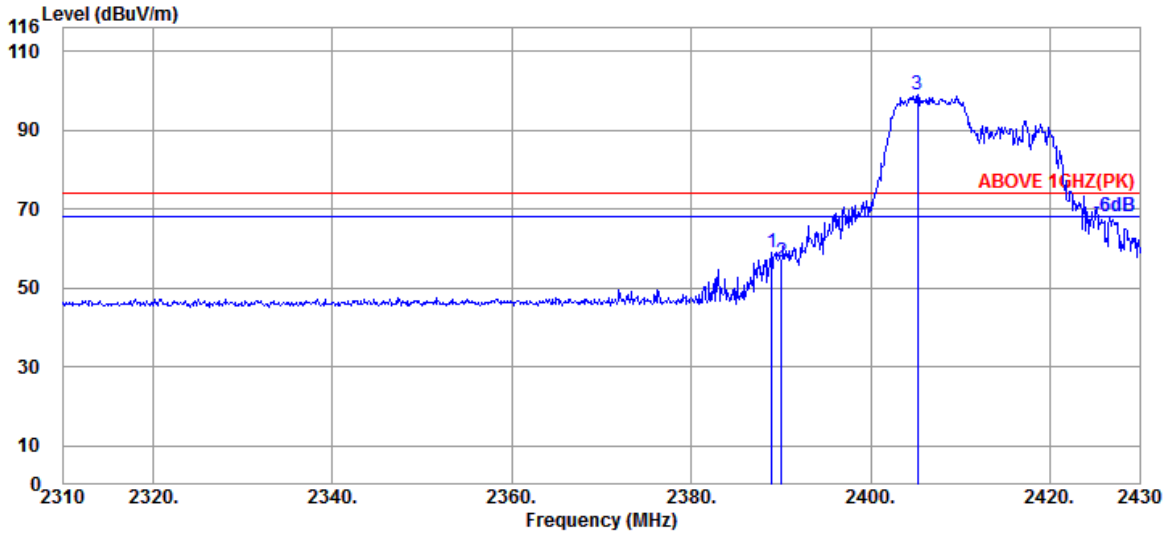

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	5.70	39.91	64.80	58.86	74.00	15.14	Peak
2390.040	28.27	5.70	39.91	62.52	56.58	74.00	17.42	Peak
@ 2405.280	28.34	5.73	39.91	104.66	98.82	---	---	Peak

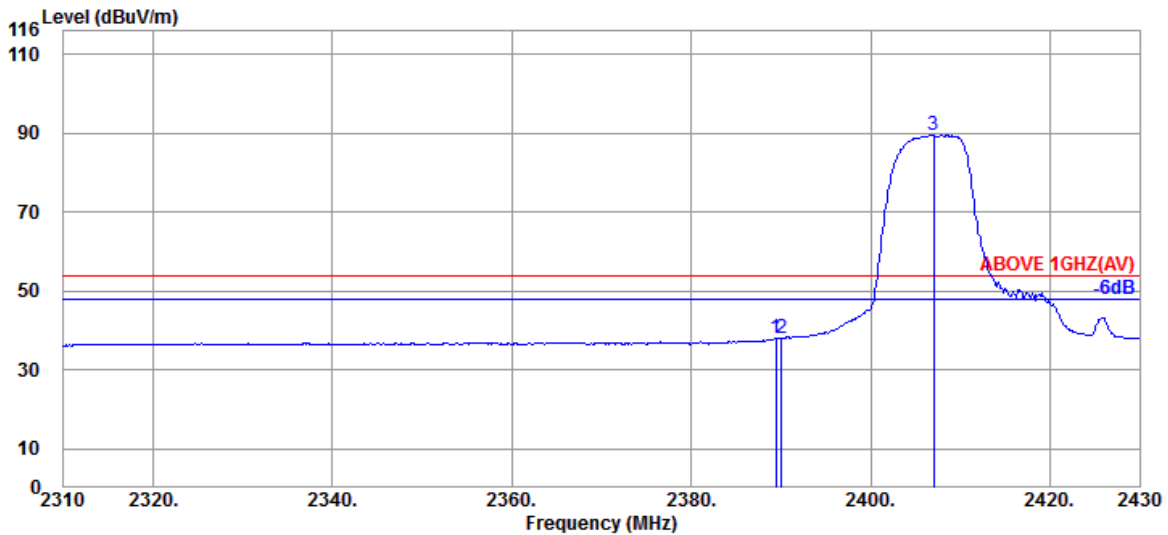


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	5.70	39.91	43.84	37.90	54.00	16.10	Average
2390.040	28.27	5.70	39.91	43.92	37.98	54.00	16.02	Average
@ 2407.080	28.34	5.73	39.91	95.19	89.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

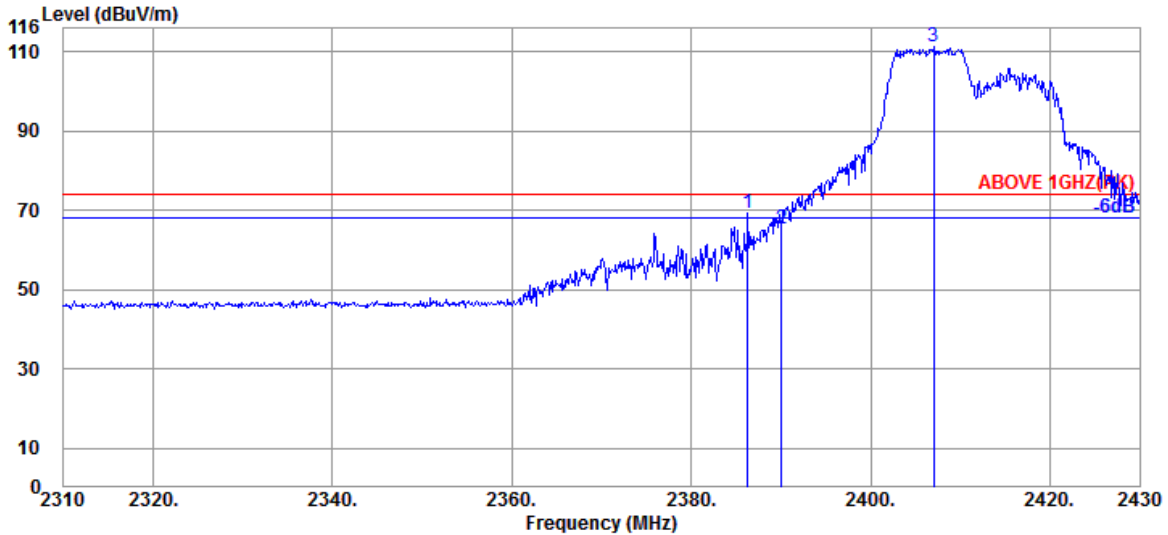

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.320	28.27	5.70	39.91	75.25	69.31	74.00	4.69	Peak
2390.040	28.27	5.70	39.91	71.31	65.37	74.00	8.63	Peak
@ 2407.080	28.34	5.73	39.91	116.89	111.05	---	---	Peak

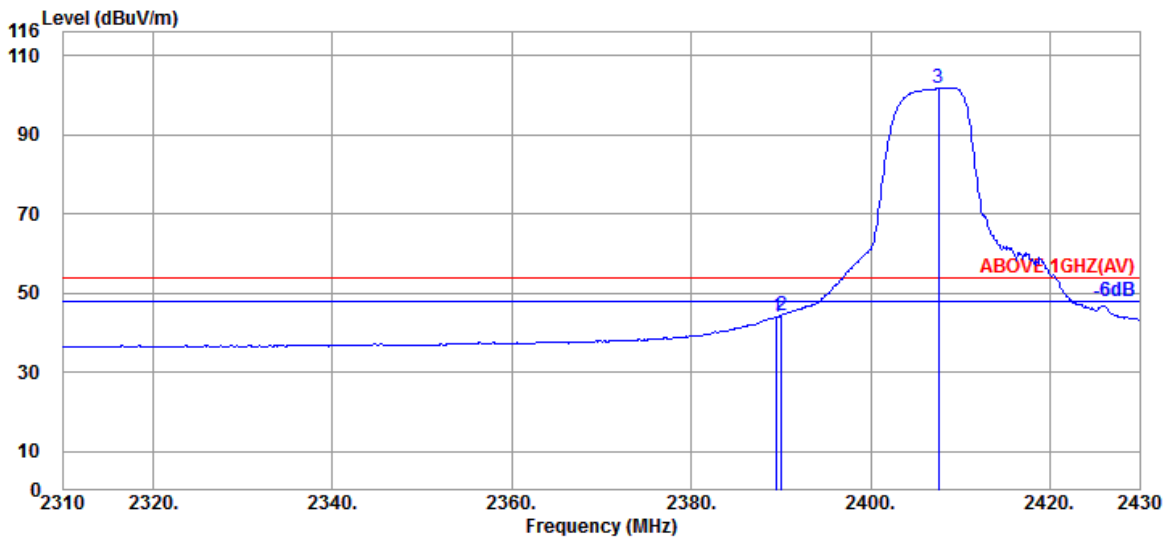


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	5.70	39.91	50.01	44.07	54.00	9.93	Average
2390.040	28.27	5.70	39.91	50.34	44.40	54.00	9.60	Average
@ 2407.560	28.34	5.73	39.91	107.65	101.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

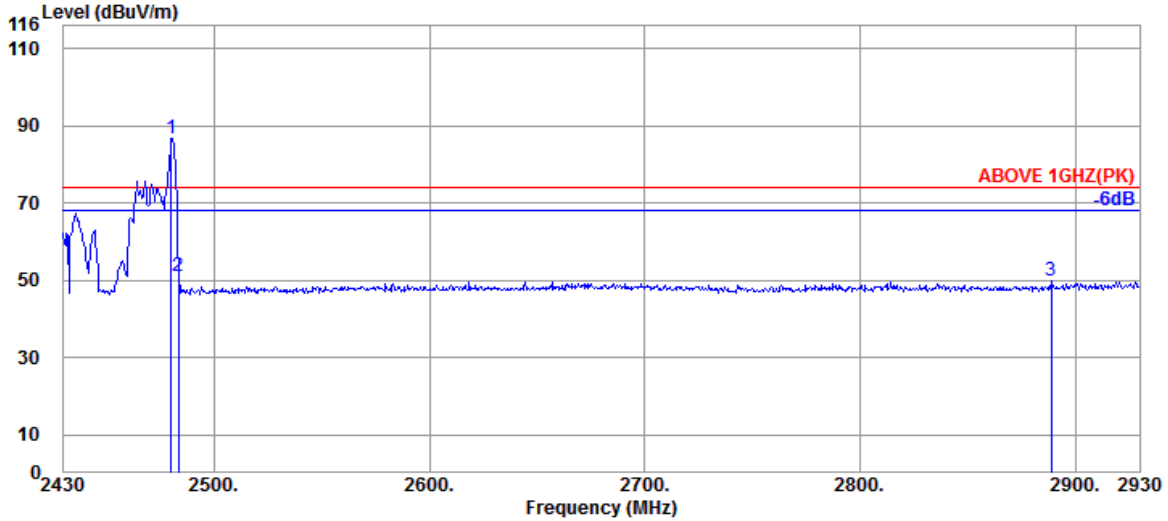

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	92.20	86.72	---	---	Peak
2483.500	28.60	5.83	39.91	56.35	50.87	74.00	23.13	Peak
2889.000	29.57	6.34	40.01	53.83	49.73	74.00	24.27	Peak

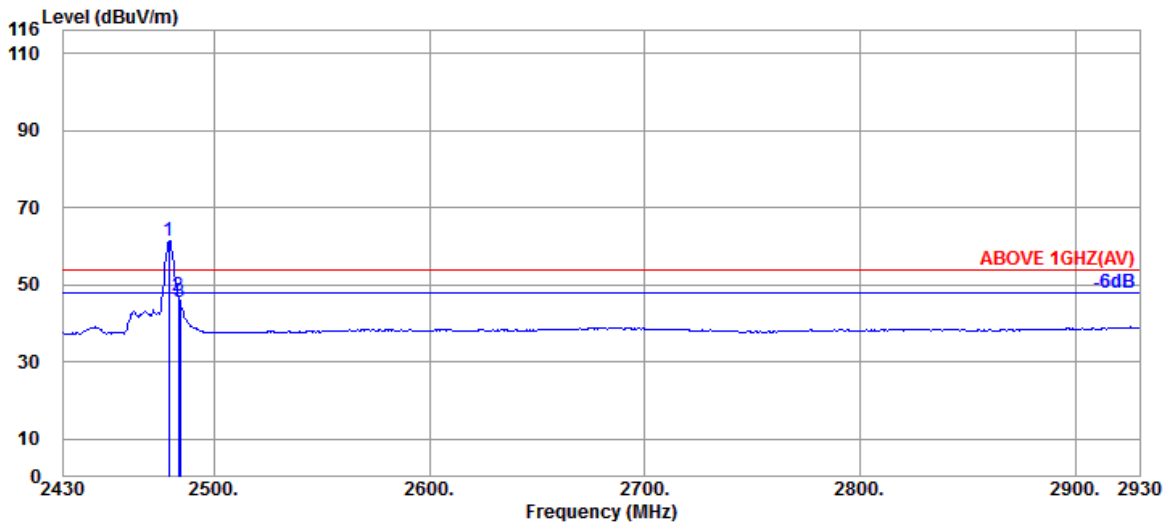


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	67.02	61.54	---	---	Average
2483.500	28.60	5.83	39.91	52.45	46.97	54.00	7.03	Average
2484.000	28.60	5.83	39.91	51.18	45.70	54.00	8.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

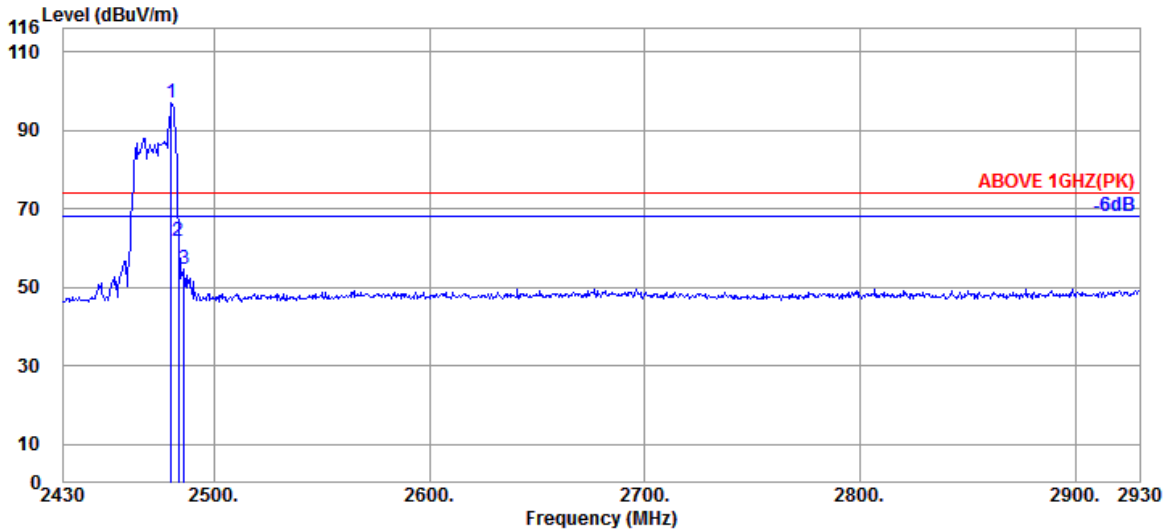

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	102.46	96.98	---	---	Peak
2483.500	28.60	5.83	39.91	67.37	61.89	74.00	12.11	Peak
2486.000	28.60	5.83	39.91	60.24	54.76	74.00	19.24	Peak

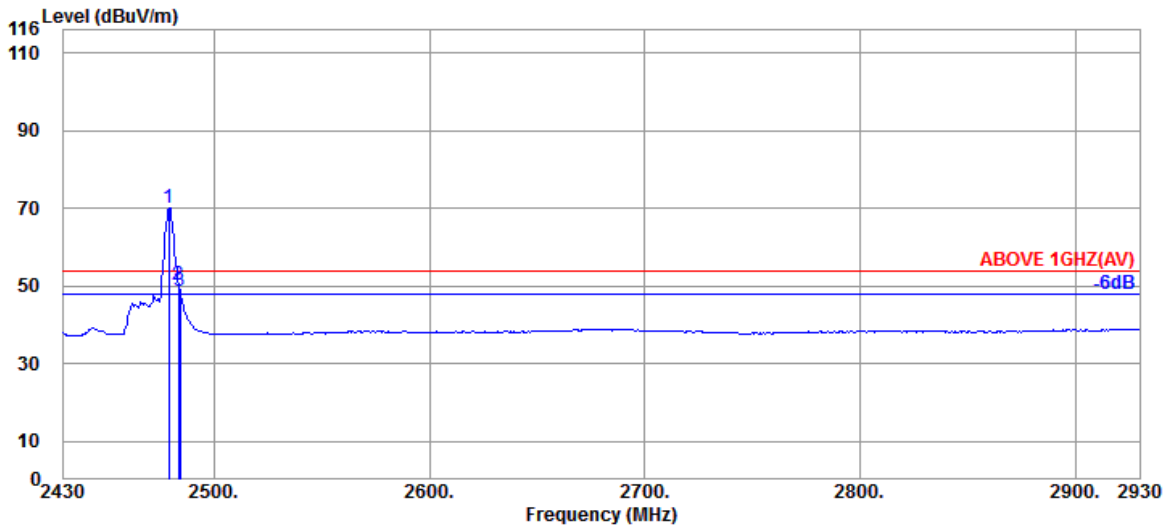


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	75.48	70.00	---	---	Average
2483.500	28.60	5.83	39.91	55.72	50.24	54.00	3.76	Average
2484.000	28.60	5.83	39.91	54.14	48.66	54.00	5.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

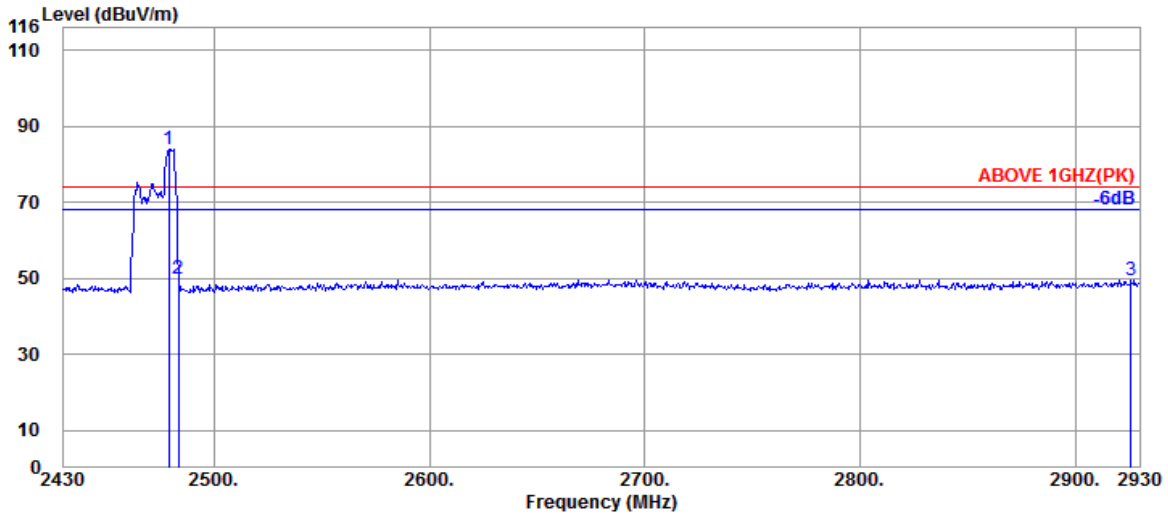

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	89.53	84.05	---	---	Peak
2483.500	28.60	5.83	39.91	55.46	49.98	74.00	24.02	Peak
2926.000	29.75	6.38	40.01	53.55	49.67	74.00	24.33	Peak

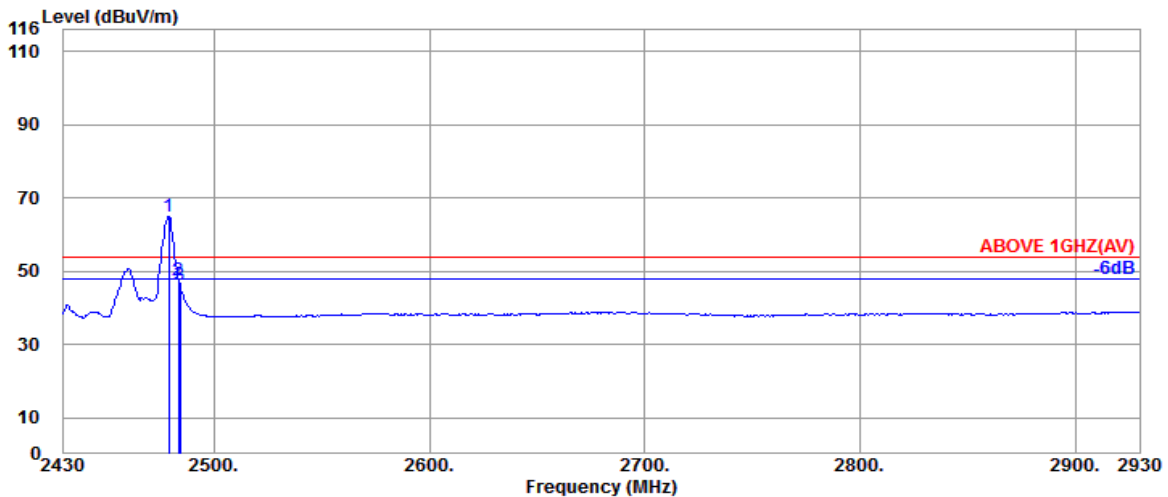


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	70.51	65.03	---	---	Average
2483.500	28.60	5.83	39.91	52.96	47.48	54.00	6.52	Average
2484.000	28.60	5.83	39.91	51.65	46.17	54.00	7.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

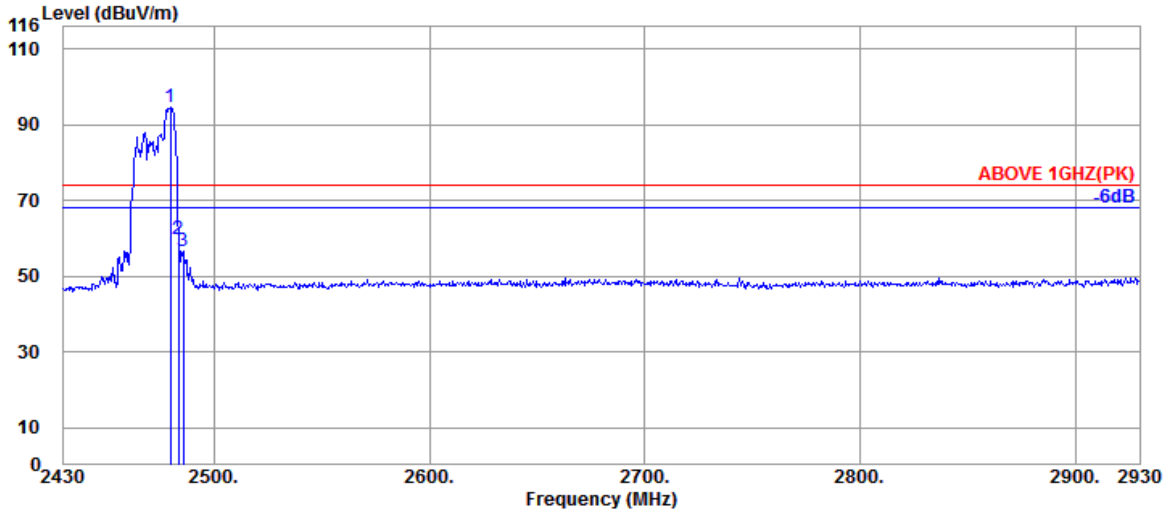

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.60	5.83	39.91	99.95	94.47	---	---	Peak
2483.500	28.60	5.83	39.91	65.12	59.64	74.00	14.36	Peak
2485.500	28.60	5.83	39.91	62.28	56.80	74.00	17.20	Peak

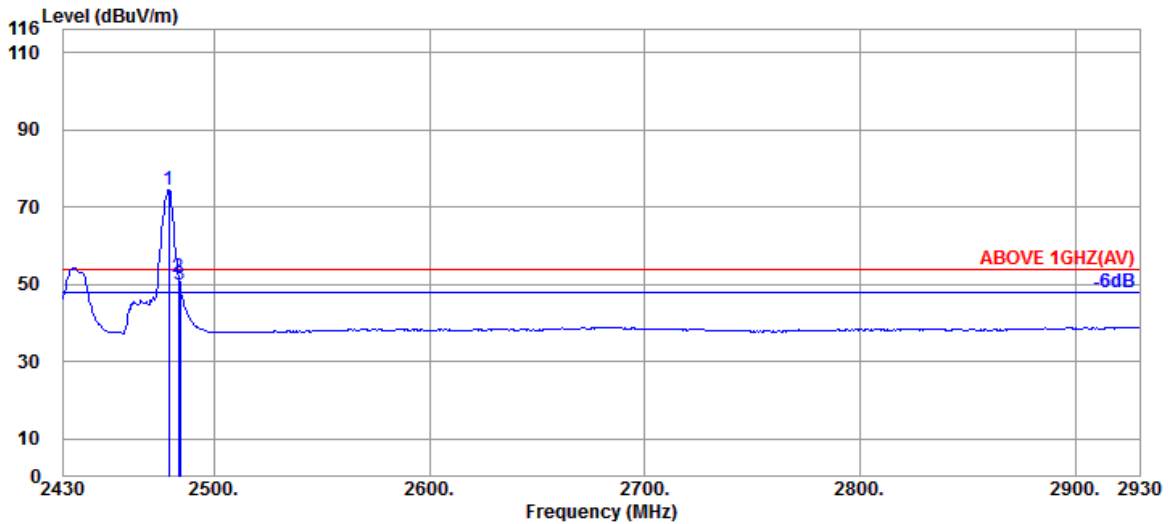


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.60	5.83	39.91	79.91	74.43	---	---	Average
2483.500	28.60	5.83	39.91	57.15	51.67	54.00	2.33	Average
2484.000	28.60	5.83	39.91	55.38	49.90	54.00	4.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

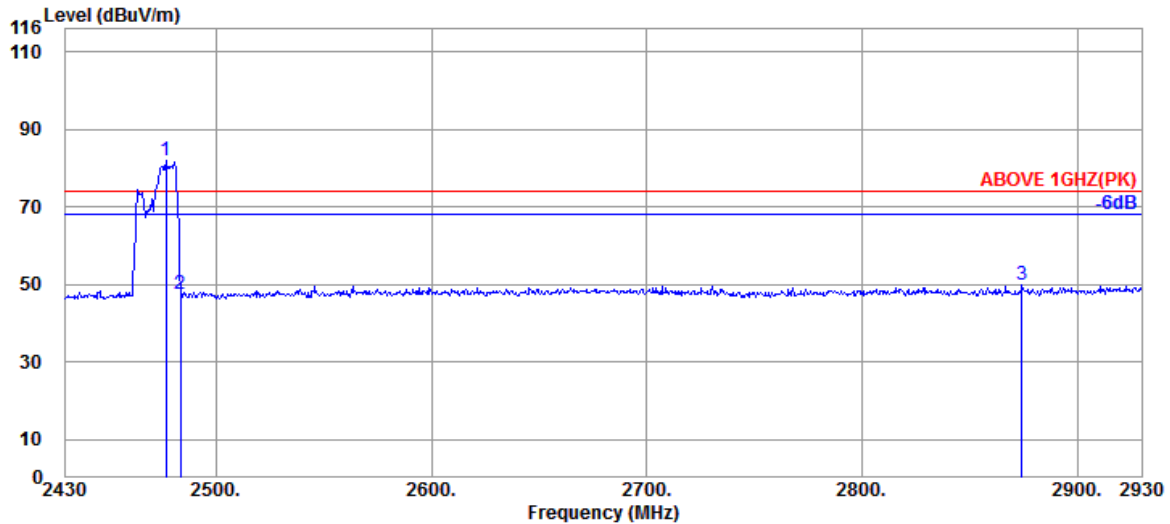

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.60	5.83	39.91	87.27	81.79	---	---	Peak
2483.500	28.60	5.83	39.91	53.08	47.60	74.00	26.40	Peak
2874.500	29.50	6.32	40.00	53.92	49.74	74.00	24.26	Peak

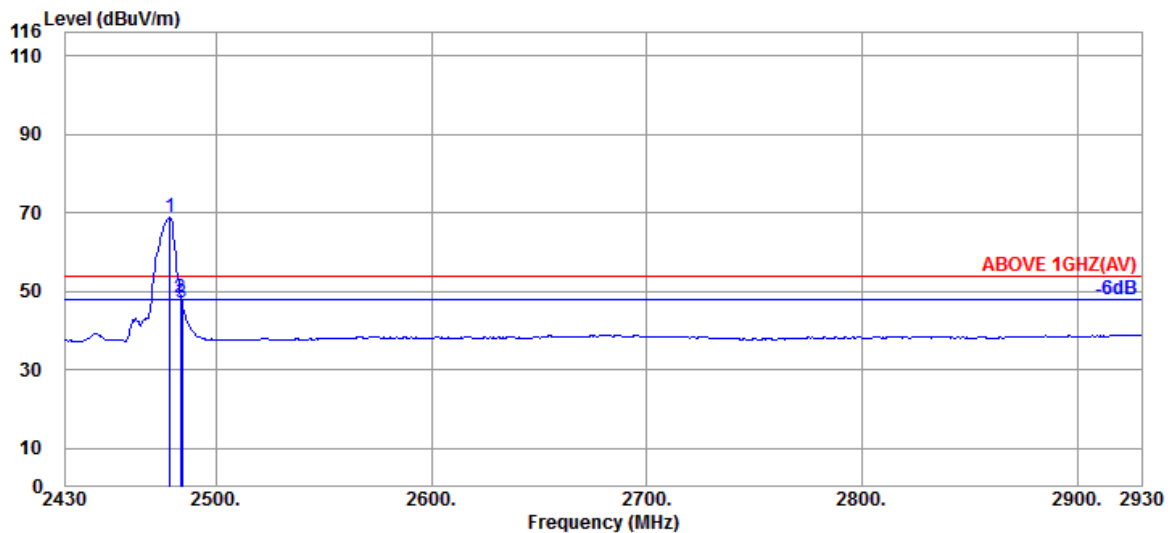


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.60	5.83	39.91	74.33	68.85	---	---	Average
2483.500	28.60	5.83	39.91	53.95	48.47	54.00	5.53	Average
2484.000	28.60	5.83	39.91	52.52	47.04	54.00	6.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

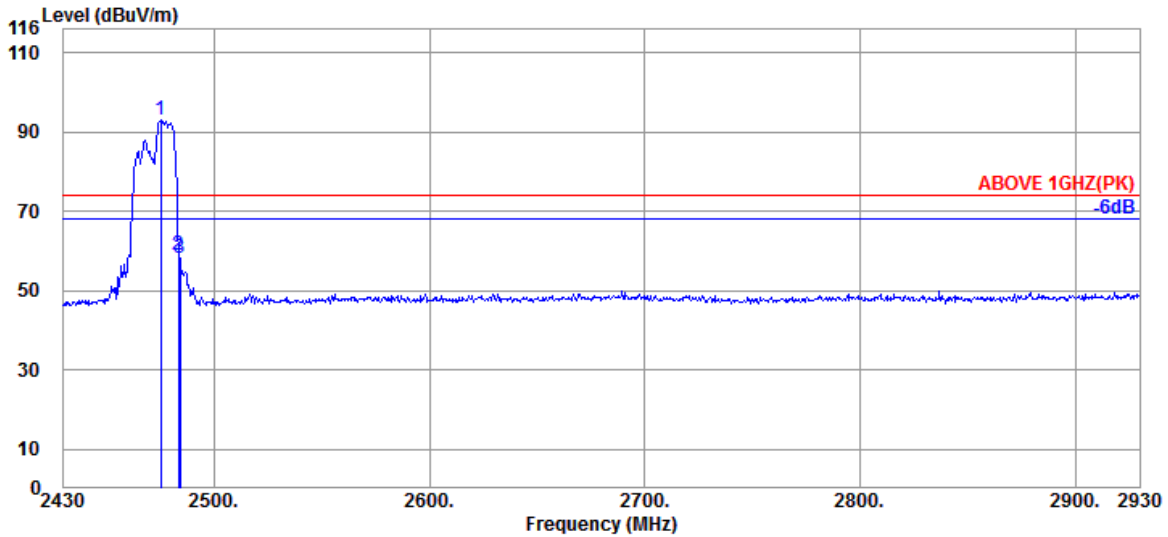

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	28.60	5.83	39.91	98.61	93.13	---	---	Peak
2483.500	28.60	5.83	39.91	64.62	59.14	74.00	14.86	Peak
2484.000	28.60	5.83	39.91	63.52	58.04	74.00	15.96	Peak

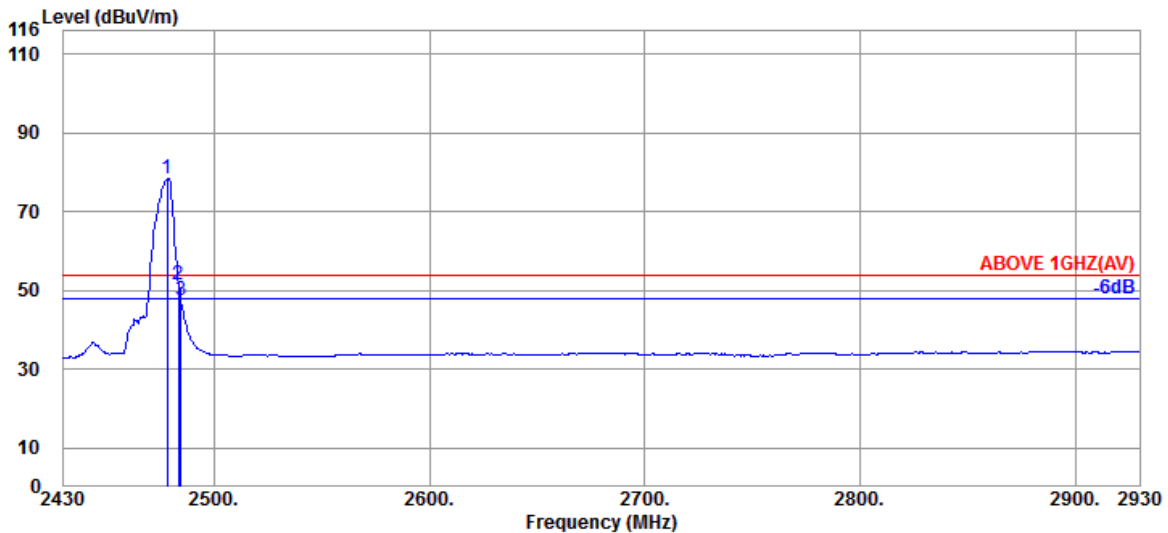


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.60	5.83	39.91	83.94	78.46	---	---	Average
2483.500	28.60	5.83	39.91	56.89	51.41	54.00	2.59	Average
2484.500	28.60	5.83	39.91	52.94	47.46	54.00	6.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

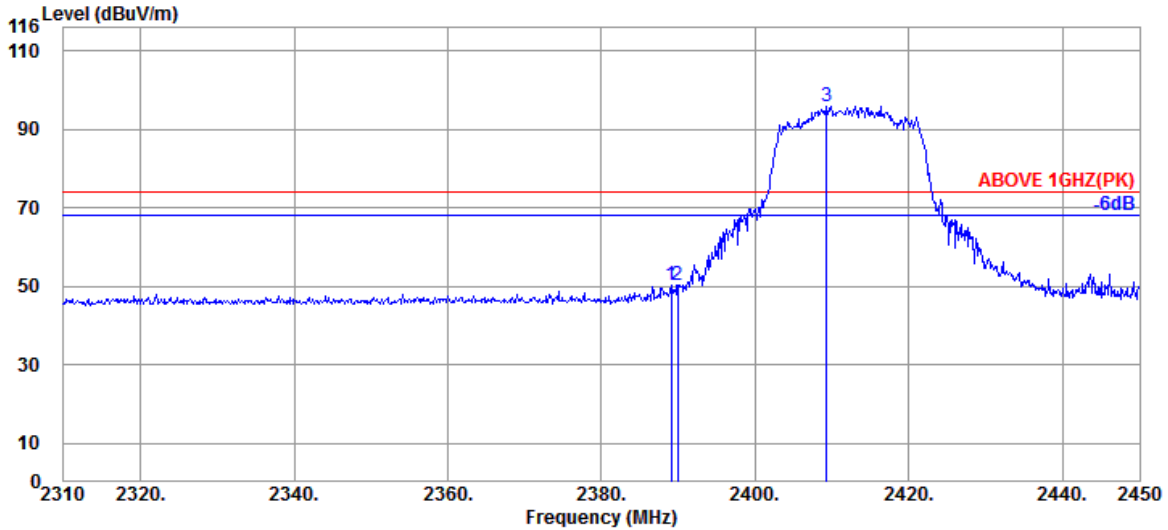

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.27	5.70	39.91	56.15	50.21	74.00	23.79	Peak
2389.940	28.27	5.70	39.91	56.09	50.15	74.00	23.85	Peak
@ 2409.260	28.34	5.73	39.91	101.77	95.93	---	---	Peak

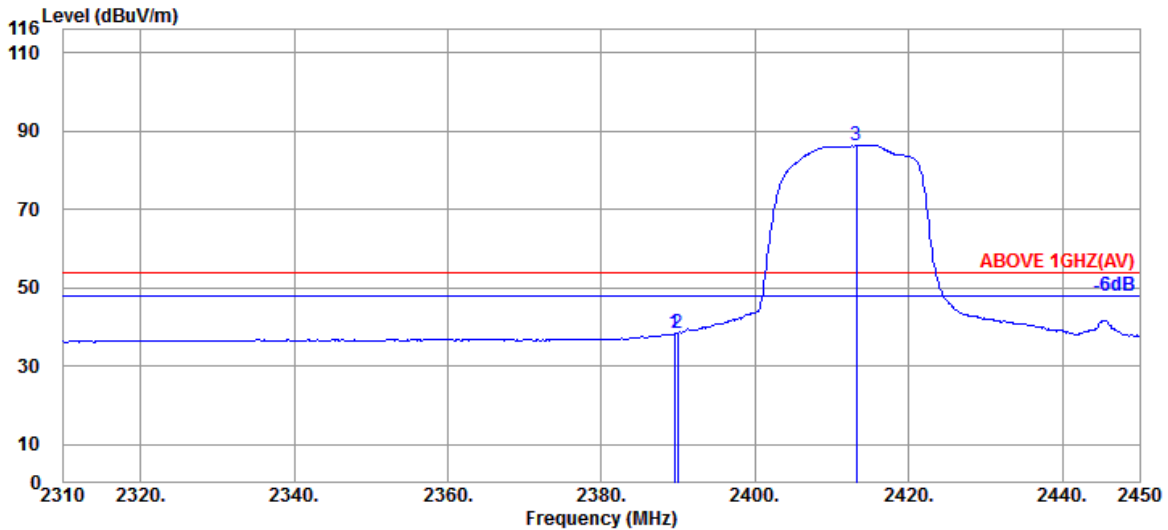


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	44.29	38.35	54.00	15.65	Average
2389.940	28.27	5.70	39.91	44.45	38.51	54.00	15.49	Average
@ 2413.180	28.39	5.73	39.91	92.05	86.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

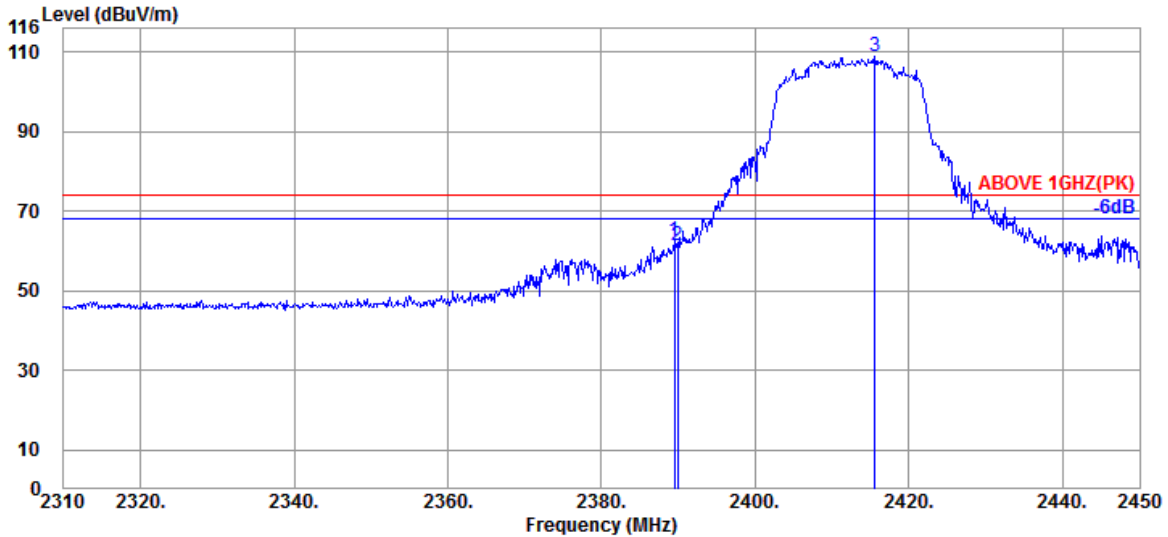

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	68.41	62.47	74.00	11.53	Peak
2389.940	28.27	5.70	39.91	67.23	61.29	74.00	12.71	Peak
@ 2415.560	28.39	5.73	39.91	114.54	108.75	---	---	Peak

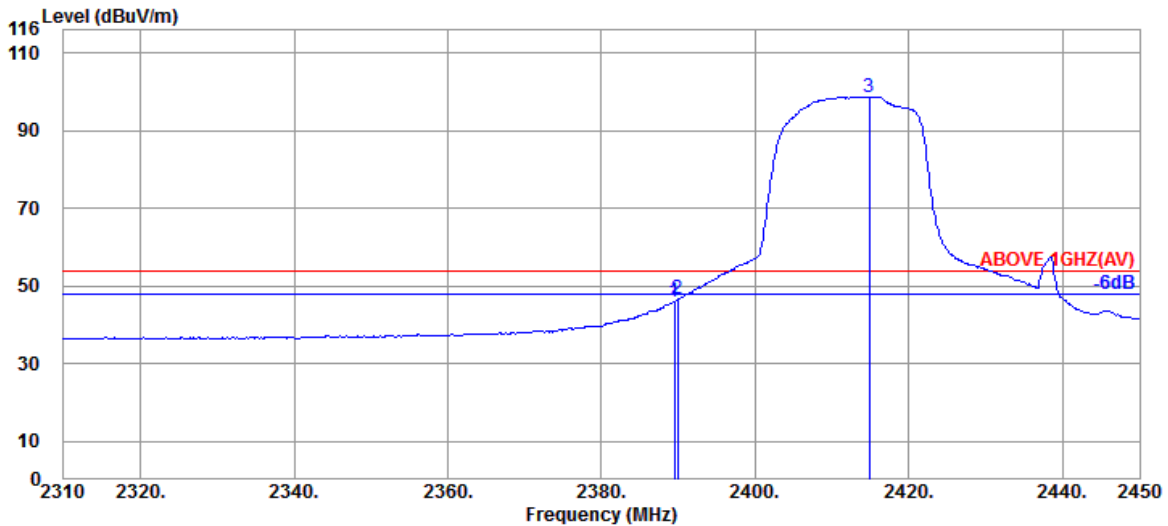


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.27	5.70	39.91	52.02	46.08	54.00	7.92	Average
2389.940	28.27	5.70	39.91	52.61	46.67	54.00	7.33	Average
@ 2414.860	28.39	5.73	39.91	104.56	98.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

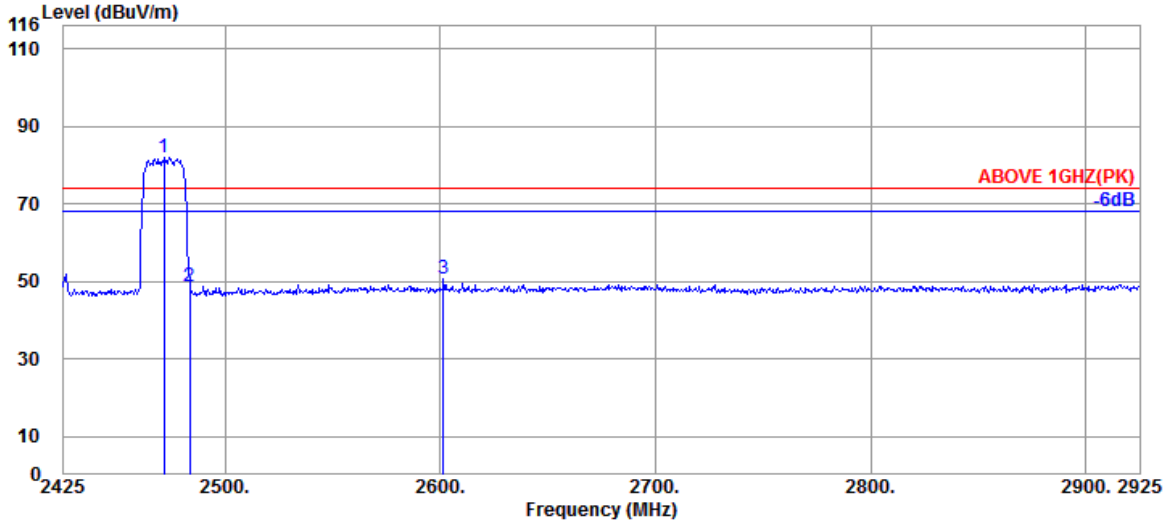

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	28.60	5.83	39.91	87.43	81.95	---	---	Peak
2483.500	28.60	5.83	39.91	54.05	48.57	74.00	25.43	Peak
2601.500	29.10	5.99	39.94	55.42	50.57	74.00	23.43	Peak

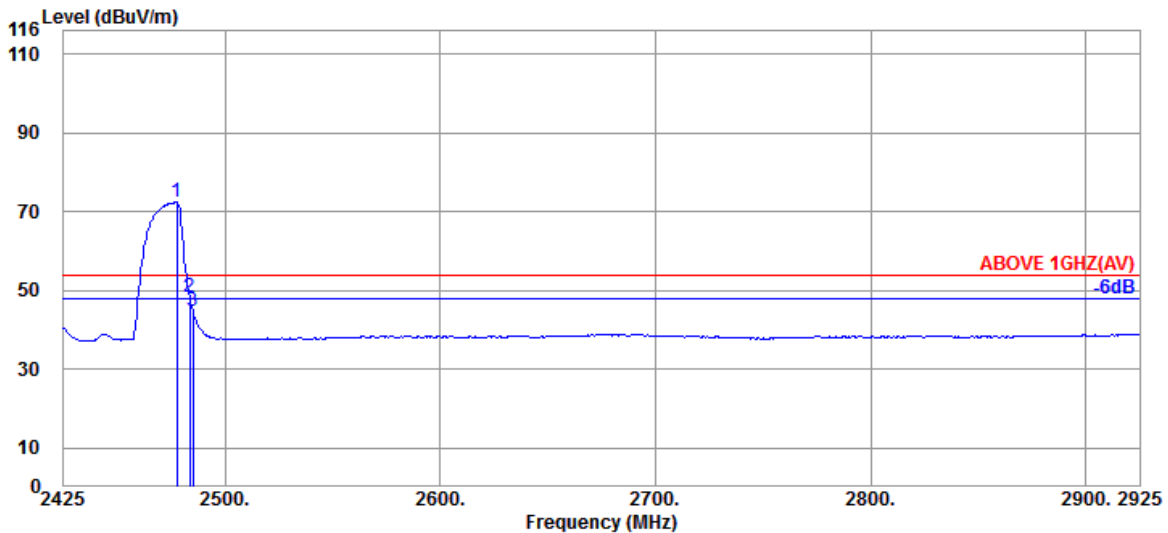


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.60	5.83	39.91	77.83	72.35	---	---	Average
2483.500	28.60	5.83	39.91	53.68	48.20	54.00	5.80	Average
2485.000	28.60	5.83	39.91	50.34	44.86	54.00	9.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

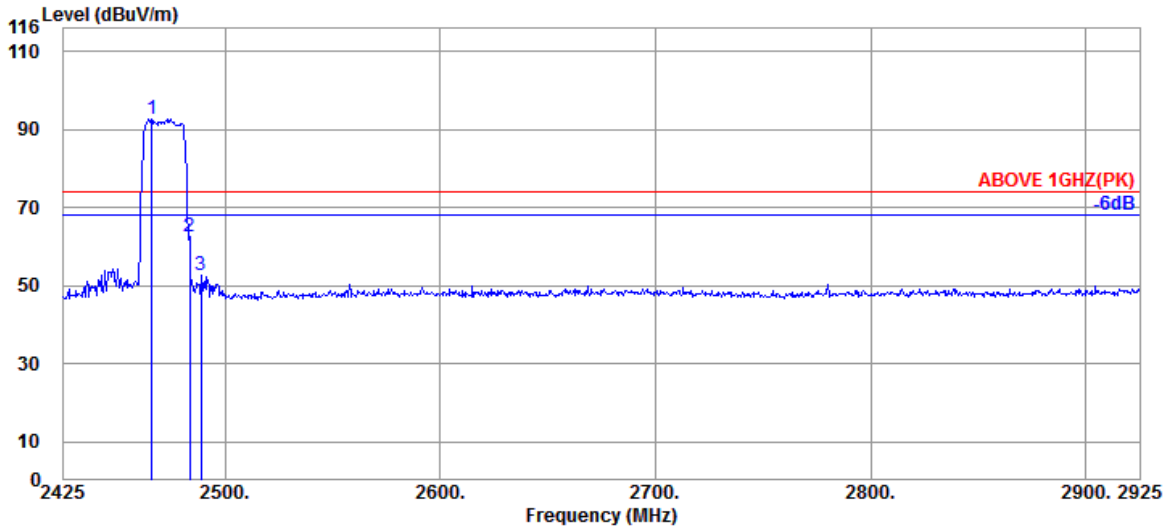

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.60	5.81	39.91	98.30	92.80	---	---	Peak
2483.500	28.60	5.83	39.91	68.18	62.70	74.00	11.30	Peak
2489.000	28.60	5.86	39.91	58.24	52.79	74.00	21.21	Peak

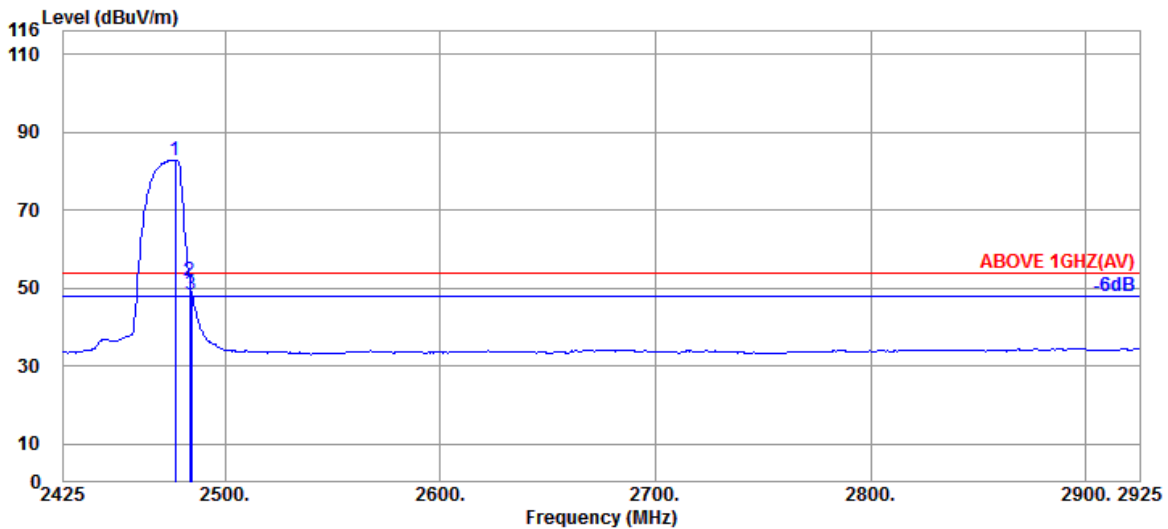


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.60	5.83	39.91	88.30	82.82	---	---	Average
2483.500	28.60	5.83	39.91	57.49	52.01	54.00	1.99	Average
2484.500	28.60	5.83	39.91	53.85	48.37	54.00	5.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

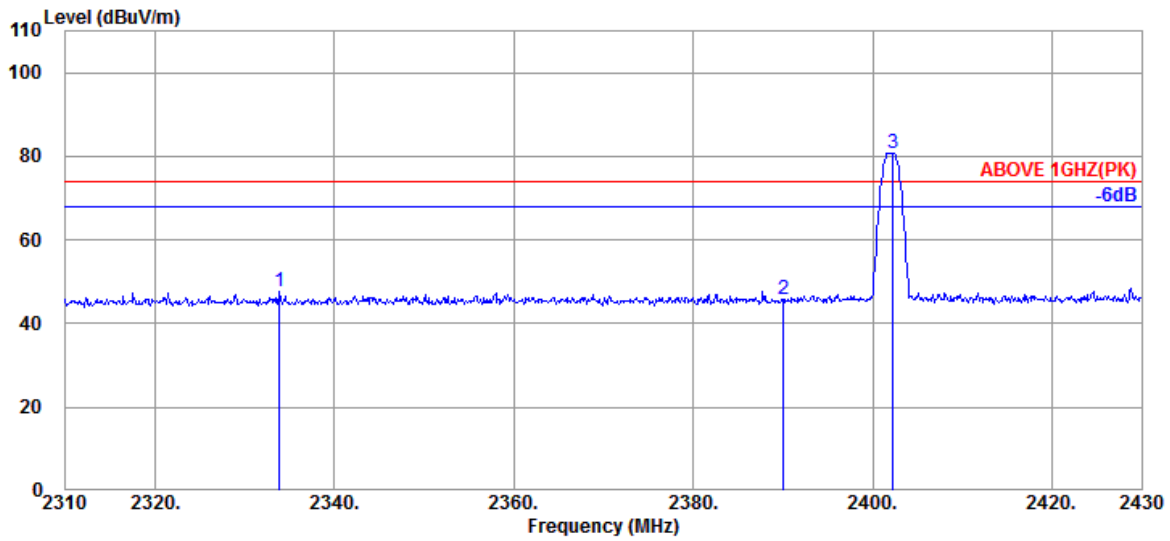

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2333.880	28.16	5.60	39.91	53.93	47.78	74.00	26.22	Peak
2390.040	28.27	5.70	39.91	51.89	45.95	74.00	28.05	Peak
@ 2402.280	28.30	5.70	39.91	86.76	80.85	---	---	Peak

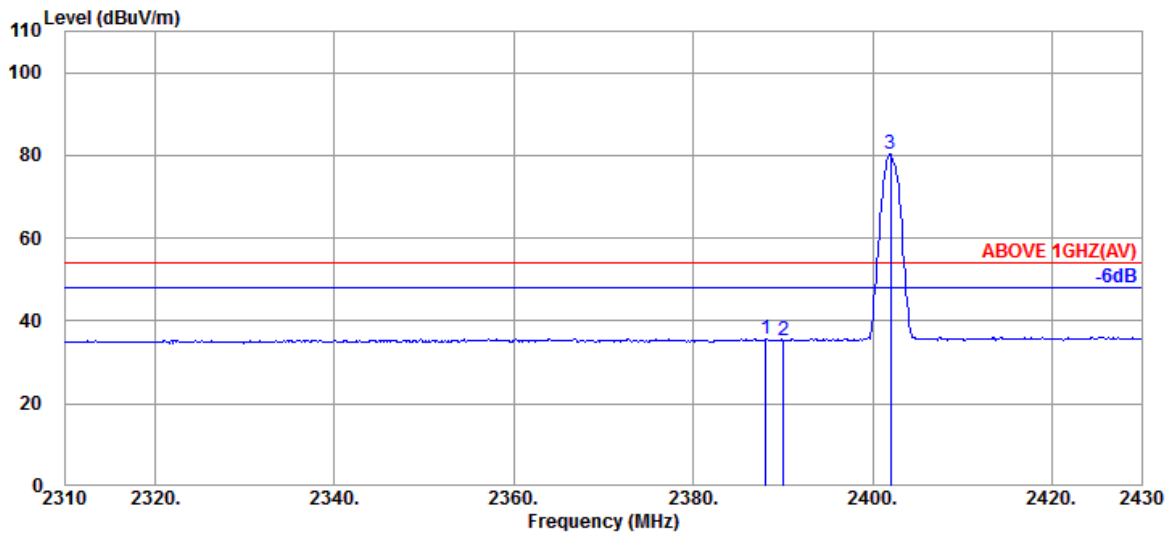


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	28.27	5.70	39.91	41.75	35.81	54.00	18.19	Average
2390.040	28.27	5.70	39.91	41.32	35.38	54.00	18.62	Average
@ 2402.040	28.30	5.70	39.91	86.15	80.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2402MHz
------	----------	-----------	------------

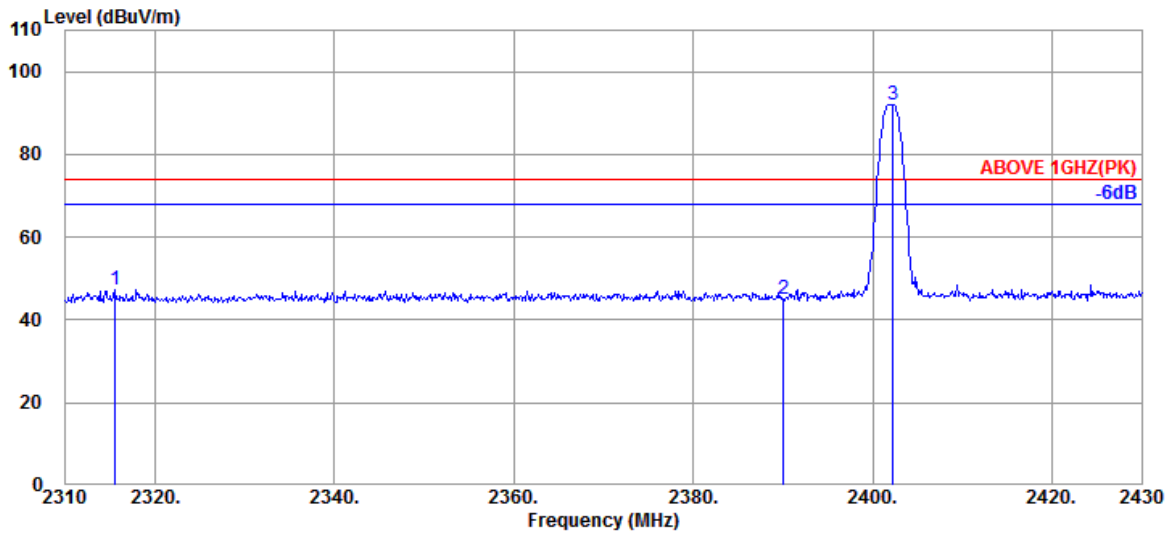

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2315.520	28.12	5.57	39.91	53.38	47.16	74.00	26.84	Peak
2390.040	28.27	5.70	39.91	51.04	45.10	74.00	28.90	Peak
@ 2402.280	28.30	5.70	39.91	98.00	92.09	---	---	Peak

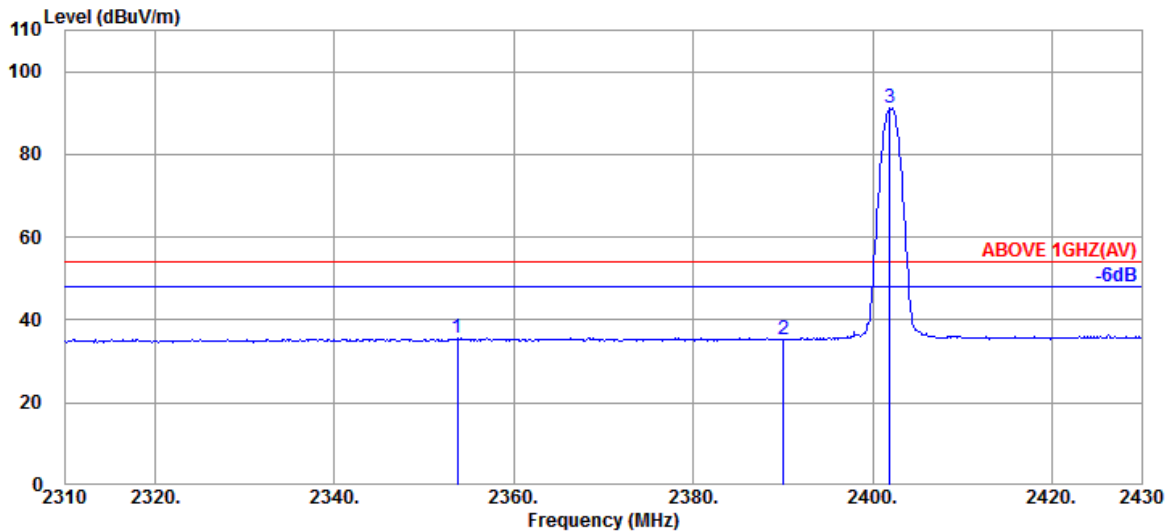


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2353.680	28.20	5.65	39.91	41.80	35.74	54.00	18.26	Average
2390.040	28.27	5.70	39.91	41.21	35.27	54.00	18.73	Average
@ 2401.920	28.30	5.70	39.91	97.01	91.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

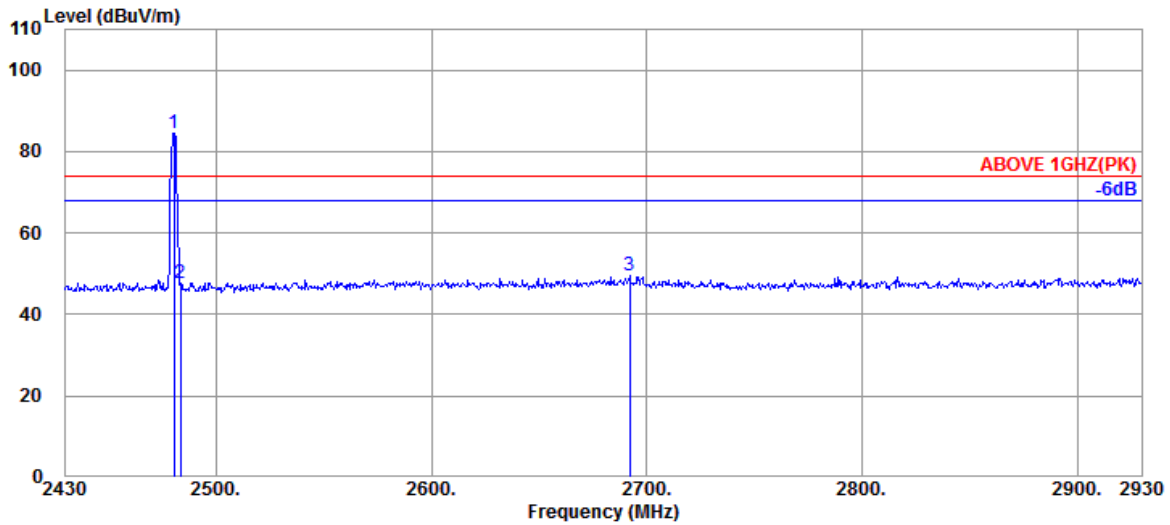

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	89.90	84.42	---	---	Peak
2483.500	28.60	5.83	39.91	53.09	47.61	74.00	26.39	Peak
2692.000	29.07	6.11	39.96	54.31	49.53	74.00	24.47	Peak

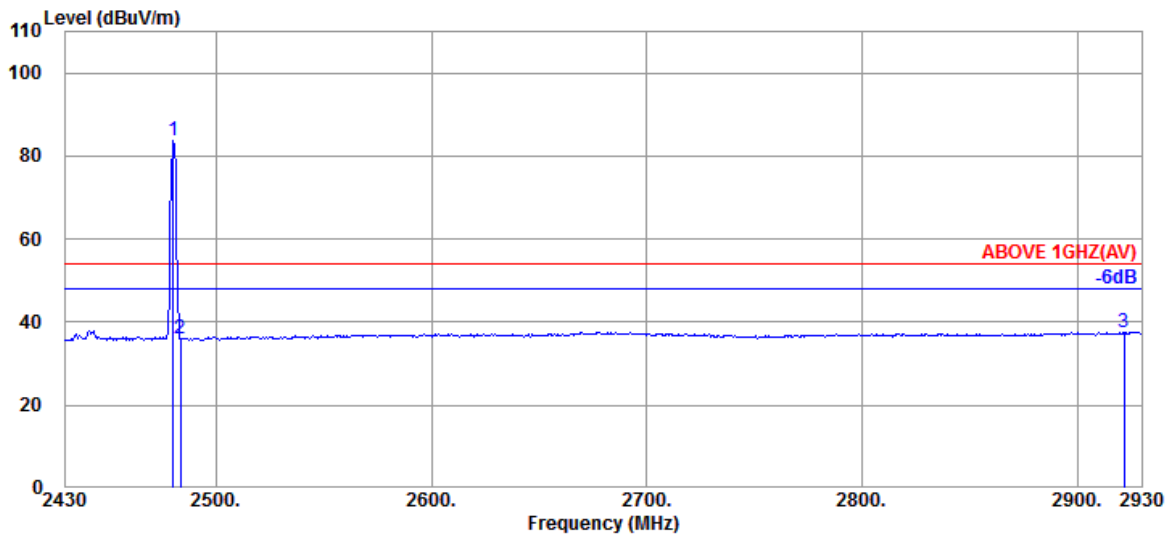


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	89.23	83.75	---	---	Average
2483.500	28.60	5.83	39.91	41.55	36.07	54.00	17.93	Average
2922.000	29.75	6.38	40.01	41.60	37.72	54.00	16.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1M)	Frequency	TX 2480MHz
------	----------	-----------	------------

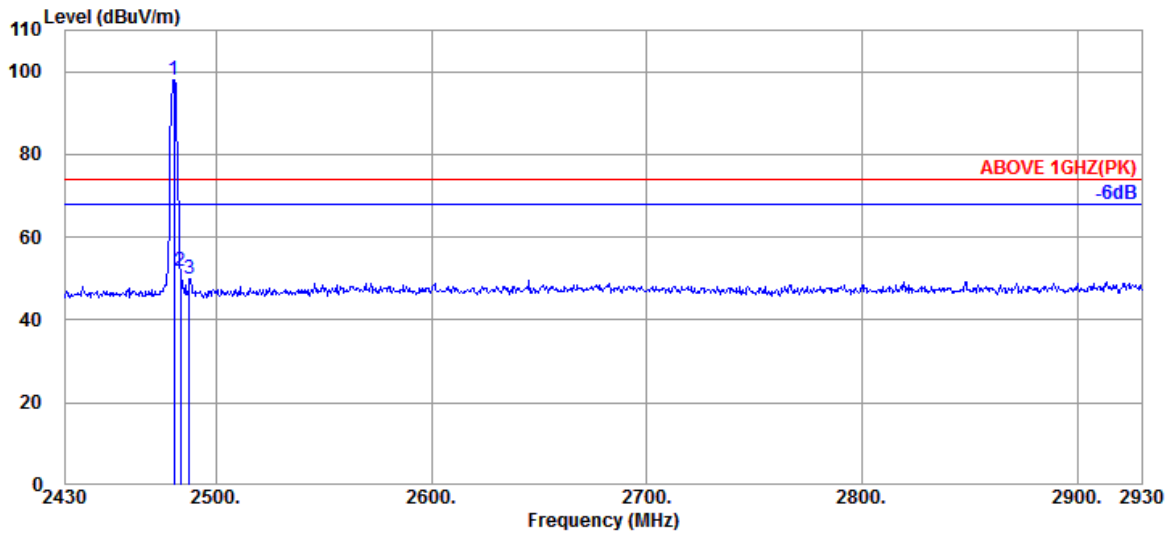

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	103.46	97.98	---	---	Peak
2483.500	28.60	5.83	39.91	57.26	51.78	74.00	22.22	Peak
2487.500	28.60	5.86	39.91	55.52	50.07	74.00	23.93	Peak

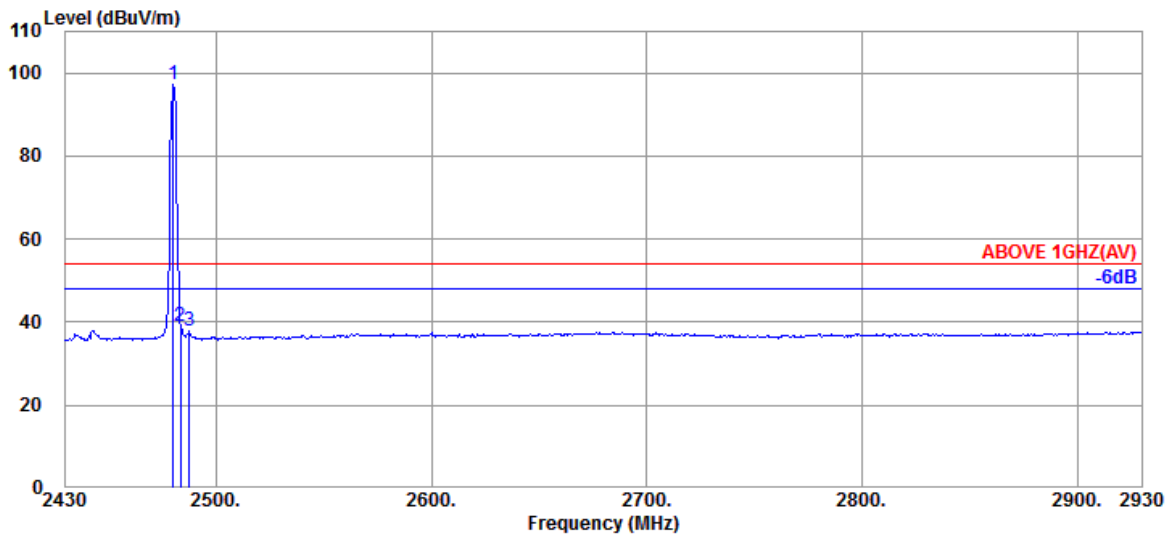


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	102.73	97.25	---	---	Average
2483.500	28.60	5.83	39.91	44.38	38.90	54.00	15.10	Average
2487.500	28.60	5.86	39.91	43.26	37.81	54.00	16.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

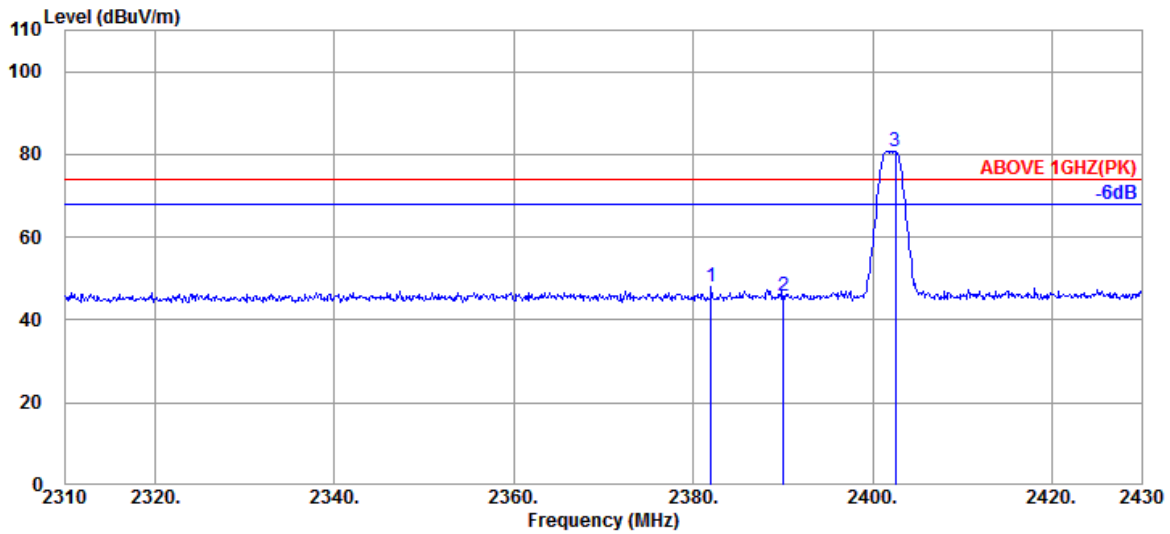

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.000	28.26	5.68	39.91	53.85	47.88	74.00	26.12	Peak
2390.040	28.27	5.70	39.91	51.70	45.76	74.00	28.24	Peak
@ 2402.520	28.30	5.73	39.91	86.70	80.82	---	---	Peak

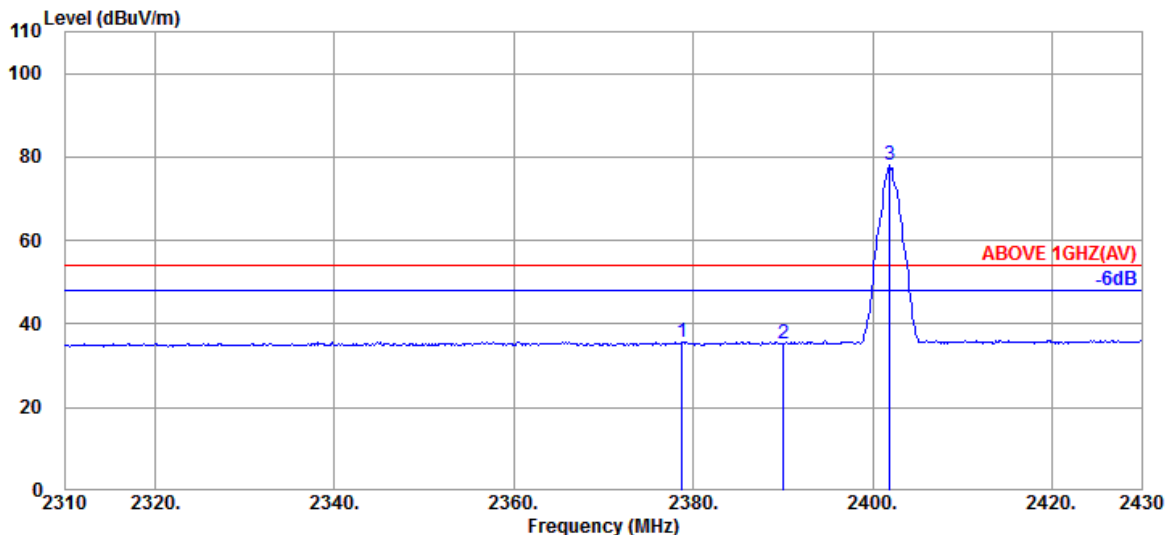


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.760	28.26	5.68	39.91	41.76	35.79	54.00	18.21	Average
2390.040	28.27	5.70	39.91	41.36	35.42	54.00	18.58	Average
@ 2401.920	28.30	5.70	39.91	84.12	78.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

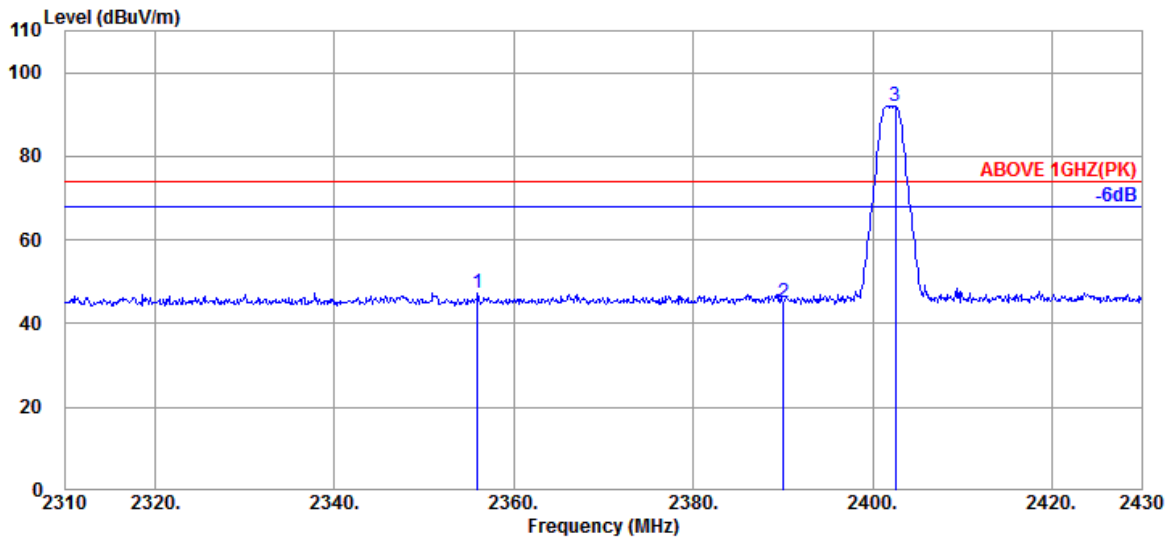

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.960	28.20	5.65	39.91	53.25	47.19	74.00	26.81	Peak
2390.040	28.27	5.70	39.91	51.16	45.22	74.00	28.78	Peak
@ 2402.520	28.30	5.73	39.91	97.97	92.09	---	---	Peak

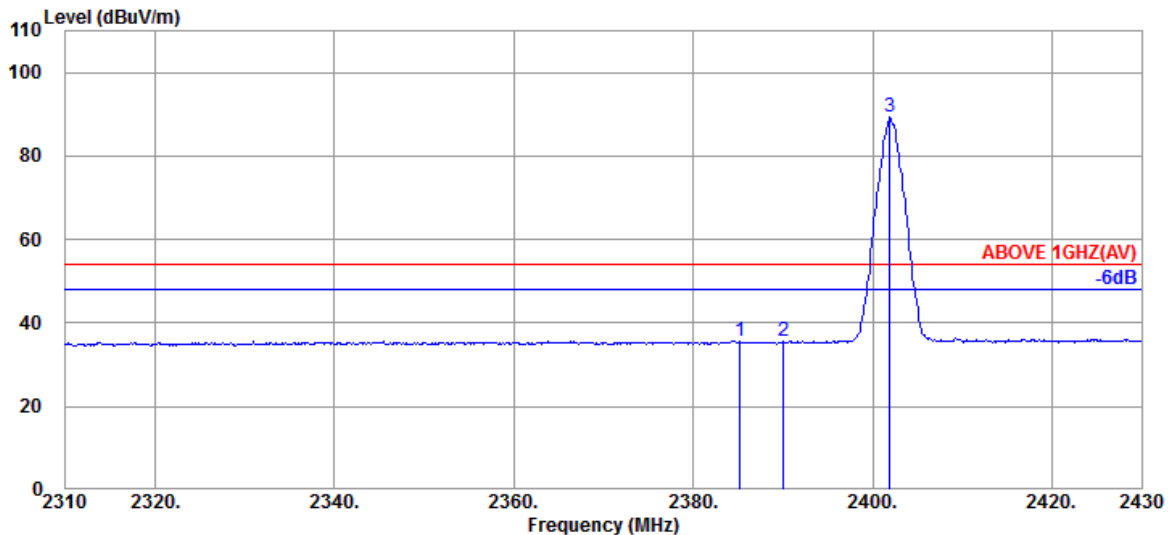


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.240	28.27	5.68	39.91	41.63	35.67	54.00	18.33	Average
2390.040	28.27	5.70	39.91	41.45	35.51	54.00	18.49	Average
@ 2401.920	28.30	5.70	39.91	95.17	89.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

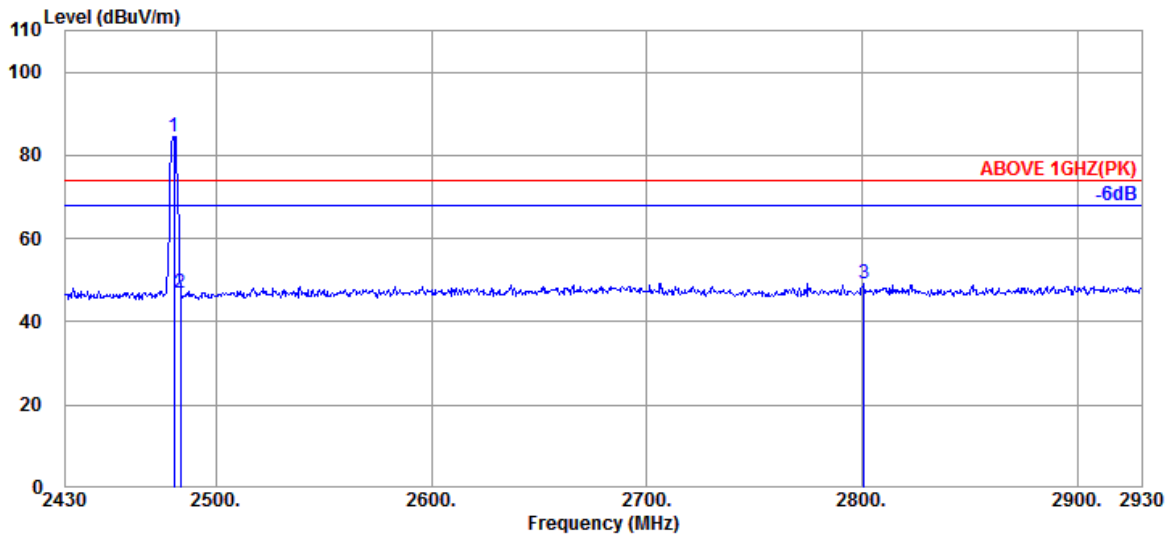

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	90.05	84.57	---	---	Peak
2483.500	28.60	5.83	39.91	52.39	46.91	74.00	27.09	Peak
2801.000	29.20	6.24	39.98	53.75	49.21	74.00	24.79	Peak

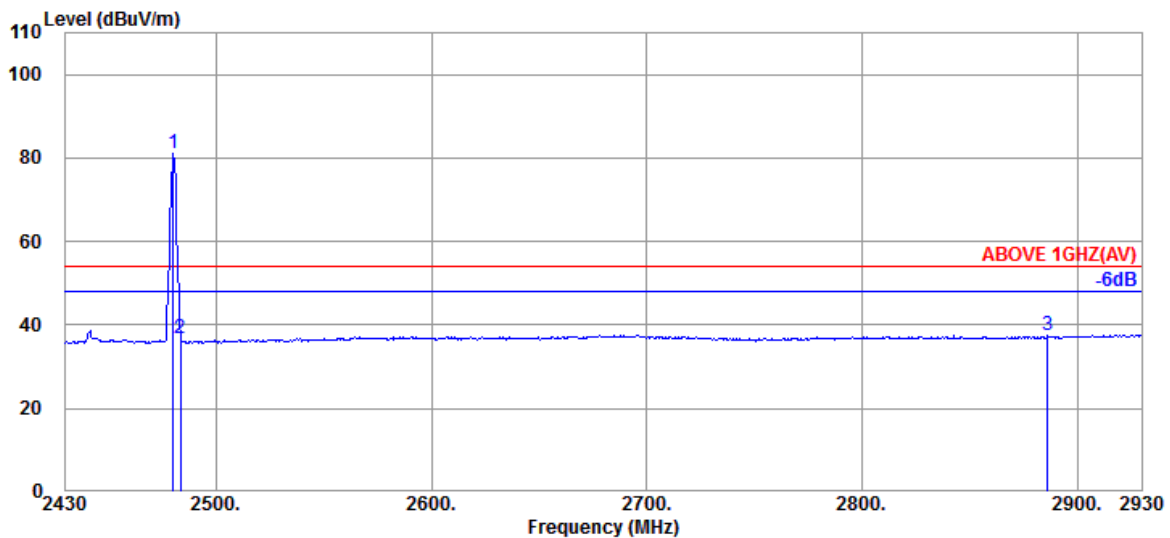


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	86.71	81.23	---	---	Average
2483.500	28.60	5.83	39.91	42.09	36.61	54.00	17.39	Average
2886.500	29.57	6.34	40.00	41.80	37.71	54.00	16.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

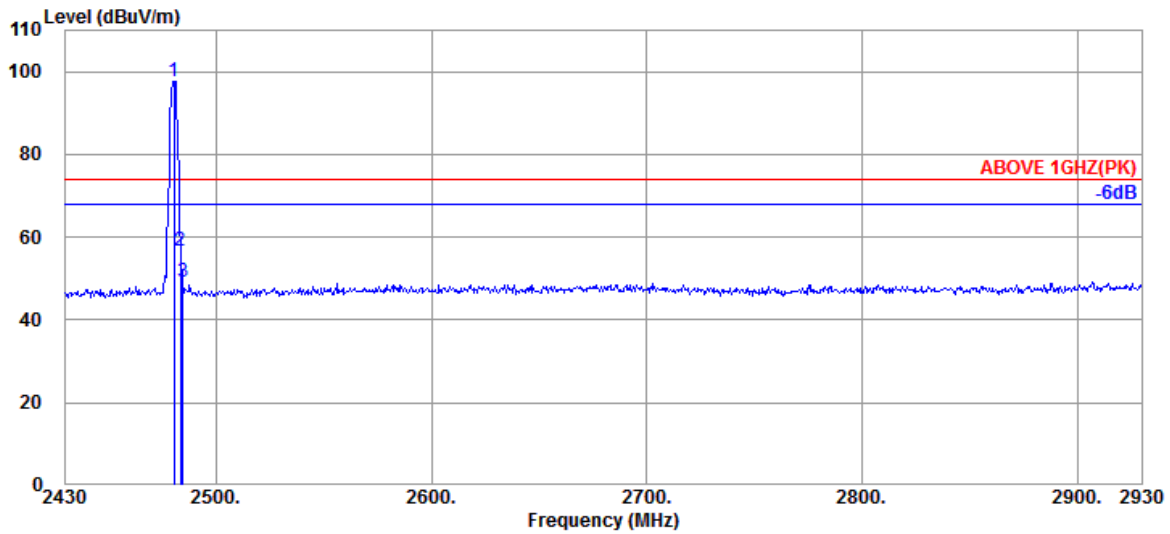

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	28.60	5.83	39.91	103.09	97.61	---	---	Peak
2483.500	28.60	5.83	39.91	62.27	56.79	74.00	17.21	Peak
2484.500	28.60	5.83	39.91	54.53	49.05	74.00	24.95	Peak

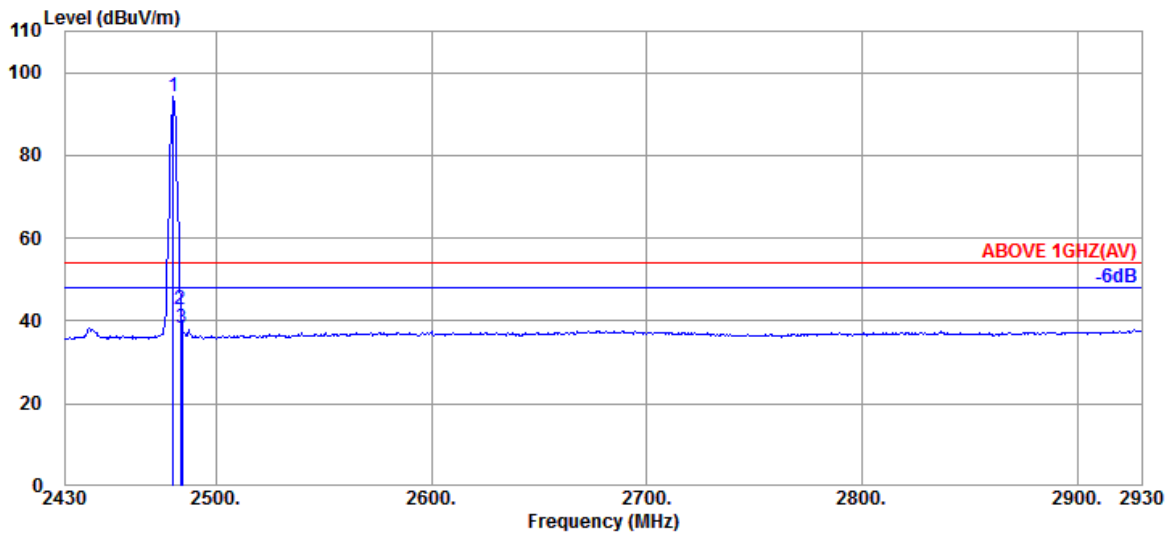

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.60	5.83	39.91	99.68	94.20	---	---	Average
2483.500	28.60	5.83	39.91	48.16	42.68	54.00	11.32	Average
2484.000	28.60	5.83	39.91	43.74	38.26	54.00	15.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.23	46.66	54.00	7.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	47.59	50.02	54.00	3.98	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	43.94	46.37	54.00	7.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	45.52	47.95	54.00	6.05	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.92	47.35	54.00	6.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.05	46.48	54.00	7.52	Peak

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4894.000	33.52	8.21	39.28	46.07	48.52	54.00	5.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4894.000	33.52	8.21	39.28	44.54	46.99	54.00	7.01	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	43.91	46.34	54.00	7.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.00	46.43	54.00	7.57	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.27	46.70	54.00	7.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.52	8.20	39.29	44.82	47.25	54.00	6.75	Peak

Mode	BLE (1M)	Frequency	TX 2402MHz					
------	----------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.40	8.17	39.33	43.36	45.60	54.00	8.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.40	8.17	39.33	43.48	45.72	54.00	8.28	Peak

Mode	BLE (1M)	Frequency	TX 2440MHz					
------	----------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.45	8.20	39.29	45.51	47.87	54.00	6.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.45	8.20	39.29	44.94	47.30	54.00	6.70	Peak

Mode	BLE (1M)	Frequency	TX 2480MHz					
------	----------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.24	39.25	44.40	47.11	54.00	6.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.72	8.24	39.25	44.52	47.23	54.00	6.77	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9table 4 general radiated emissions limits is not required.

A.3 6dB/OCCUPIED BANDWIDTH

Test Date	2019/09/19 ~ 25	Temp./Hum.	24~25°C/50~54%
Cable Loss	0.5dB	Tested By	Martin Chen
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.3.1 Emission Bandwidth Result

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11b	2412	10.14	13.386	>500kHz
	2442	10.14	13.444	
	2462	10.14	13.398	
	2472	10.14	13.854	
802.11g	2412	16.38	16.607	
	2442	16.40	16.800	
	2462	16.38	16.678	
	2472	16.38	16.370	
802.11n-HT20	2412	17.62	17.781	
	2442	17.62	17.812	
	2462	17.62	17.794	
	2472	17.62	17.594	
802.11n-HT40	2422	36.40	36.208	
	2442	36.40	36.231	
	2452	36.36	36.187	
	2462	36.36	36.106	
802.11ax-HE20	2412	18.98	18.978	
	2442	18.85	18.988	
	2462	18.85	19.011	
	2472	18.63	18.708	
802.11ax-HE40	2422	38.01	37.753	
	2442	38.02	37.729	
	2452	38.03	37.740	
	2462	37.77	37.474	

Mode	RU Configuration	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11ax-HE20	26/0	2412	2.063	18.272	>500kHz
	52/37		14.48	18.129	
	106/53		17.19	18.198	
	26/8	2472	2.032	18.036	
	52/40		16.96	17.940	
	106/54		17.04	17.965	
802.11ax-HE40	242/61	2422	18.88	18.740	
	242/62	2462	18.58	18.513	

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE	2402	0.6760	1.0648	>500kHz
	2440	0.6844	1.0613	
	2480	0.6956	1.0633	

A.3.2 Measurement Plots

