


## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>6</b>
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	148
A.2.3 Emissions in Non-restricted Frequency Bands .....	163
<b>A.3 26dB/6dB BANDWIDTH</b> .....	<b>164</b>
A.3.1 26dB/6dB Bandwidth Result .....	164
A.3.2 Measurement Plots .....	169
<b>A.4 MAXIMUM OUTPUT POWER</b> .....	<b>189</b>
A.4.1 Average Output Power .....	189
A.4.2 Measurement Plots .....	197
<b>A.5 POWER SPECTRAL DENSITY</b> .....	<b>205</b>
A.5.1 Power Spectral Density Result .....	205
A.5.2 Measurement Plots .....	209
<b>A.6 FREQUENCY STABILITY</b> .....	<b>228</b>
A.6.1 Frequency stability Result .....	228

## A.1 CONDUCTED EMISSION

Test Date	2020/11/11	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)	Test Model	17Z90P

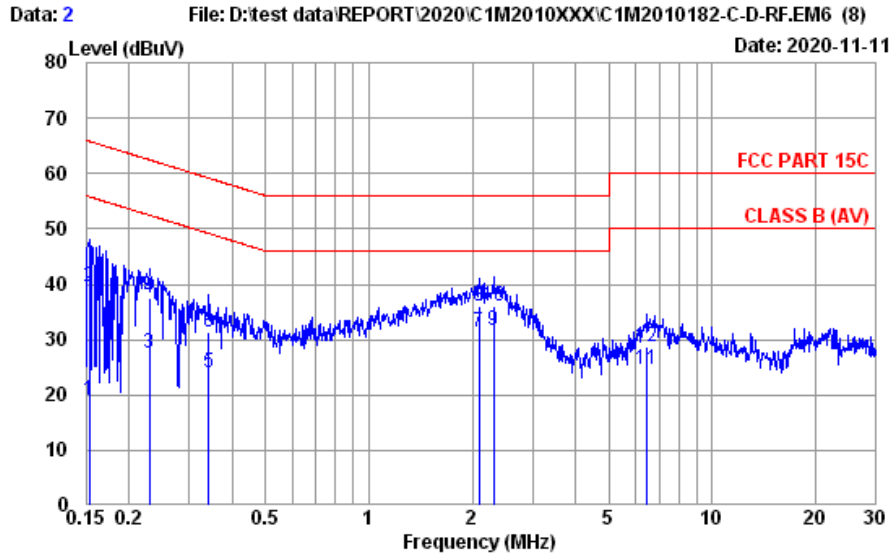


Site No. : No.8 Shielded Room Data No. : 2  
 Instrument 1 : Receiver ESR(774)  
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : FCC PART 15C Phase : NEUTRAL  
 Environment : 24°C / 51% Engineer : Roy Hung  
 EUT Model : 17Z90P Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 Inpaq

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.153	10.20	0.03	9.85	-1.06	19.02	55.82	36.80	Average
2	0.153	10.20	0.03	9.85	19.36	39.44	65.82	26.38	QP
3	0.229	10.20	0.03	9.85	7.49	27.57	52.48	24.91	Average
4	0.229	10.20	0.03	9.85	17.41	37.49	62.48	24.99	QP
5	0.341	10.20	0.03	9.85	3.81	23.89	49.18	25.29	Average
6	0.341	10.20	0.03	9.85	11.16	31.24	59.18	27.94	QP
7	2.088	10.30	0.06	9.86	11.00	31.22	46.00	14.78	Average
8	2.088	10.30	0.06	9.86	15.68	35.90	56.00	20.10	QP
9	2.309	10.30	0.07	9.86	11.37	31.60	46.00	14.40	Average
10	2.309	10.30	0.07	9.86	15.89	36.12	56.00	19.88	QP
11	6.454	10.38	0.11	9.89	4.20	24.58	50.00	25.42	Average
12	6.454	10.38	0.11	9.89	8.22	28.60	60.00	31.40	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2020/11/11	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)	Test Model	17Z90P

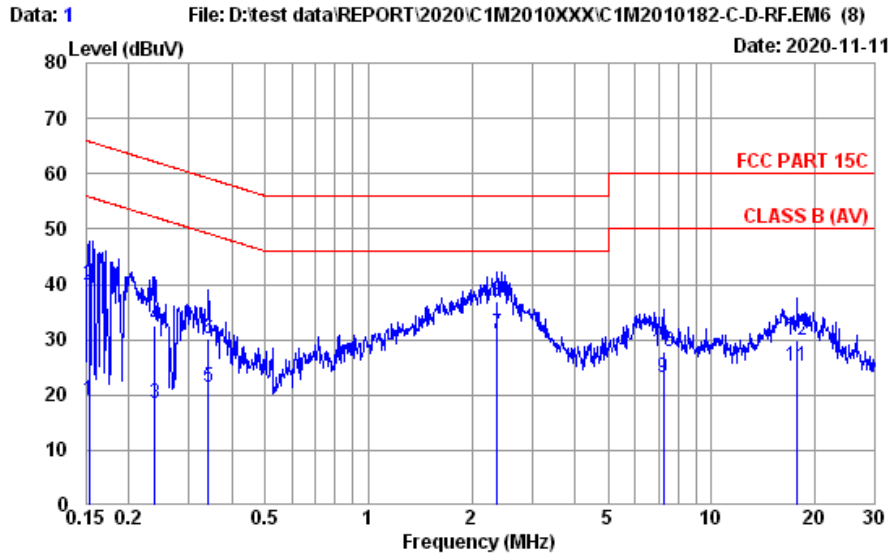


Site No. : No.8 Shielded Room Data No. : 1  
 Instrument 1 : Receiver ESR(774)  
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : FCC PART 15C Phase : LINE  
 Environment : 24°C / 51% Engineer : Roy Hung  
 EUT Model : 17Z90P Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 Inpaq

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.153	10.20	0.03	9.85	-0.93	19.15	55.82	36.67	Average
2	0.153	10.20	0.03	9.85	19.76	39.84	65.82	25.98	QP
3	0.238	10.20	0.03	9.85	-1.65	18.43	52.17	33.74	Average
4	0.238	10.20	0.03	9.85	12.45	32.53	62.17	29.64	QP
5	0.341	10.20	0.03	9.85	1.39	21.47	49.18	27.71	Average
6	0.341	10.20	0.03	9.85	10.06	30.14	59.18	29.04	QP
7	2.371	10.30	0.07	9.86	10.92	31.15	46.00	14.85	Average
8	2.371	10.30	0.07	9.86	16.75	36.98	56.00	19.02	QP
9	7.252	10.31	0.12	9.90	2.90	23.23	50.00	26.77	Average
10	7.252	10.31	0.12	9.90	7.55	27.88	60.00	32.12	QP
11	17.755	10.56	0.19	9.95	4.55	25.25	50.00	24.75	Average
12	17.755	10.56	0.19	9.95	9.31	30.01	60.00	29.99	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2020/11/11	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)	Test Model	17Z90P

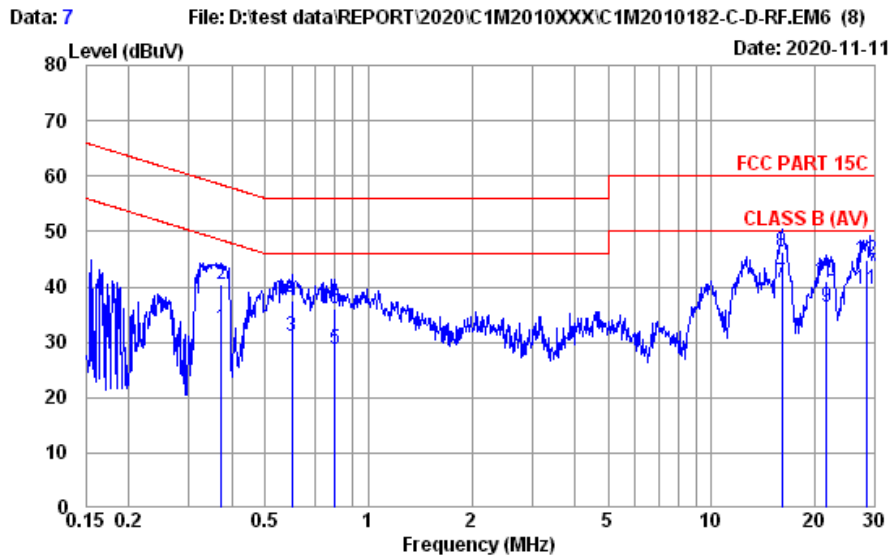


Site No.	: No.8 Shielded Room	Data No.	: 7
Instrument 1	: Receiver ESR(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: NEUTRAL
Environment	: 24°C / 51%	Engineer	: Roy Hung
EUT Model	: 17Z90P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.373	10.20	0.03	9.85	12.59	32.67	48.43	15.76	Average
2	0.373	10.20	0.03	9.85	20.42	40.50	58.43	17.93	QP
3	0.598	10.20	0.03	9.85	10.84	30.92	46.00	15.08	Average
4	0.598	10.20	0.03	9.85	17.57	37.65	56.00	18.35	QP
5	0.800	10.20	0.04	9.86	8.55	28.65	46.00	17.35	Average
6	0.800	10.20	0.04	9.86	15.87	35.97	56.00	20.03	QP
7	16.055	10.75	0.18	9.94	19.89	40.76	50.00	9.24	Average
8	16.055	10.75	0.18	9.94	25.56	46.43	60.00	13.57	QP
9	21.600	10.94	0.21	9.97	15.26	36.38	50.00	13.62	Average
10	21.600	10.94	0.21	9.97	19.82	40.94	60.00	19.06	QP
11	28.302	11.07	0.23	10.00	18.23	39.53	50.00	10.47	Average
12	28.302	11.07	0.23	10.00	23.58	44.88	60.00	15.12	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2020/11/11	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)	Test Model	17Z90P

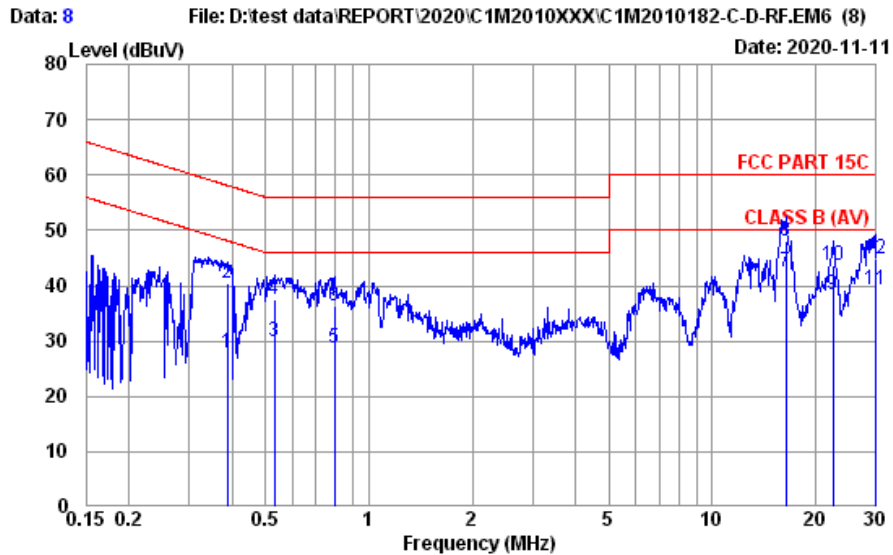

Site No.	: No.8 Shielded Room	Data No.	: 8
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENH432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: LINE
Environment	: 24°C / 51%	Engineer	: Roy Hung
EUT Model	: 17Z90P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.387	10.20	0.03	9.85	7.62	27.70	48.12	20.42	Average
2	0.387	10.20	0.03	9.85	20.37	40.45	58.12	17.67	QP
3	0.529	10.20	0.03	9.86	9.77	29.86	46.00	16.14	Average
4	0.529	10.20	0.03	9.86	17.56	37.65	56.00	18.35	QP
5	0.792	10.20	0.04	9.86	8.50	28.60	46.00	17.40	Average
6	0.792	10.20	0.04	9.86	16.33	36.43	56.00	19.57	QP
7	16.398	10.53	0.18	9.95	21.91	42.57	50.00	7.43	Average
8	16.398	10.53	0.18	9.95	27.48	48.14	60.00	11.86	QP
9	22.416	10.60	0.21	9.97	17.50	38.28	50.00	11.72	Average
10	22.416	10.60	0.21	9.97	22.89	43.67	60.00	16.33	QP
11	29.841	10.60	0.24	10.01	18.47	39.32	50.00	10.68	Average
12	29.841	10.60	0.24	10.01	23.94	44.79	60.00	15.21	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## A.2 RADIATED EMISSION

Test Date	2020/10/24 ~ 11/06	Temp./Hum.	23 ~ 24°C /54 ~ 62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #1 (with INPAQ Antenna)	Test Model	17Z90P

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	23.35	1.26	26.53	28.07	26.15	40.00	13.85	Peak
101.780	16.92	2.45	26.31	32.16	25.22	43.50	18.28	Peak
209.450	16.01	3.64	25.85	34.56	28.36	43.50	15.14	Peak
538.280	24.01	6.97	27.33	29.25	32.90	46.00	13.10	Peak
869.050	26.61	8.54	27.24	29.17	37.08	46.00	8.92	Peak
986.420	27.32	9.10	26.87	28.60	38.15	54.00	15.85	Peak


#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.790	20.99	1.40	26.52	35.48	31.35	40.00	8.65	Peak
86.260	14.08	2.25	26.36	36.94	26.91	40.00	13.09	Peak
214.300	16.38	3.69	25.84	32.91	27.14	43.50	16.36	Peak
432.550	22.42	6.32	26.78	33.29	35.25	46.00	10.75	Peak
892.330	26.78	8.67	27.17	29.39	37.67	46.00	8.33	Peak
977.690	27.28	9.06	26.90	28.71	38.15	54.00	15.85	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


**Band Edge:**

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

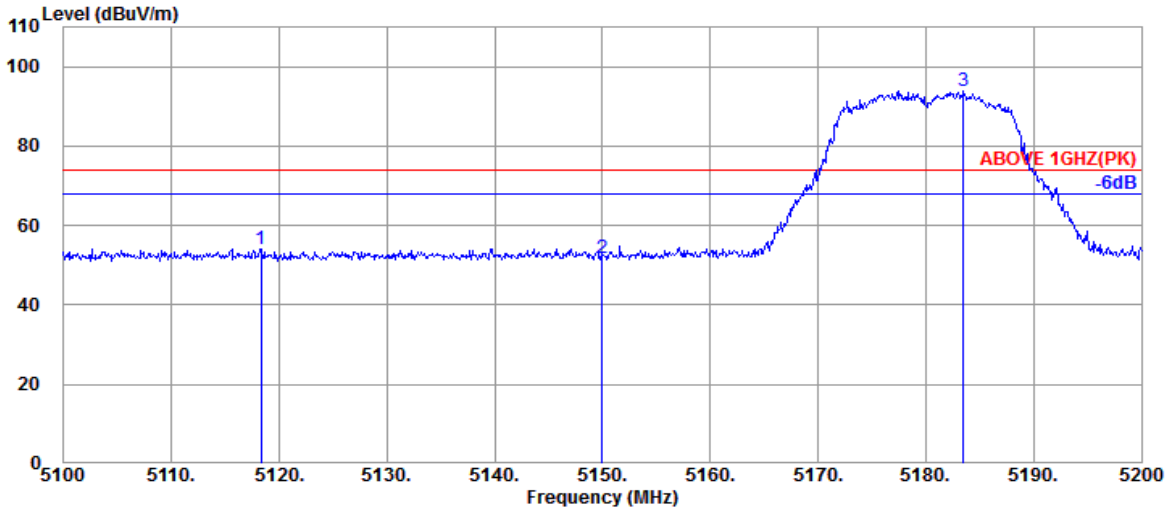

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.300	33.97	8.36	39.22	51.00	54.11	74.00	19.89	Peak
5150.000	34.10	8.39	39.21	48.40	51.68	74.00	22.32	Peak
@ 5183.500	34.23	8.41	39.21	90.31	93.74	---	---	Peak

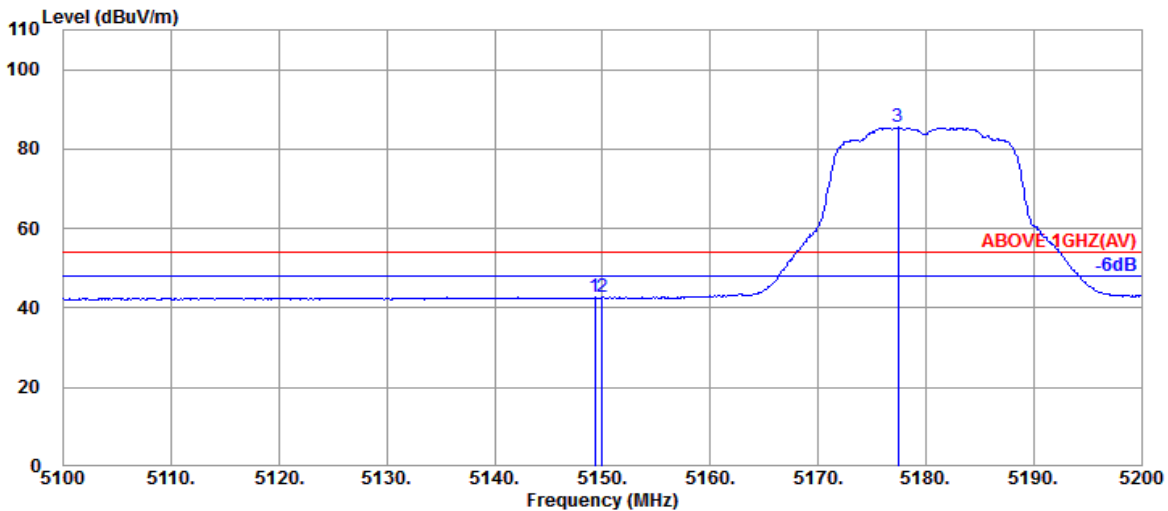


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.10	8.39	39.21	39.41	42.69	54.00	11.31	Average
5150.000	34.10	8.39	39.21	39.43	42.71	54.00	11.29	Average
@ 5177.400	34.23	8.41	39.21	82.04	85.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

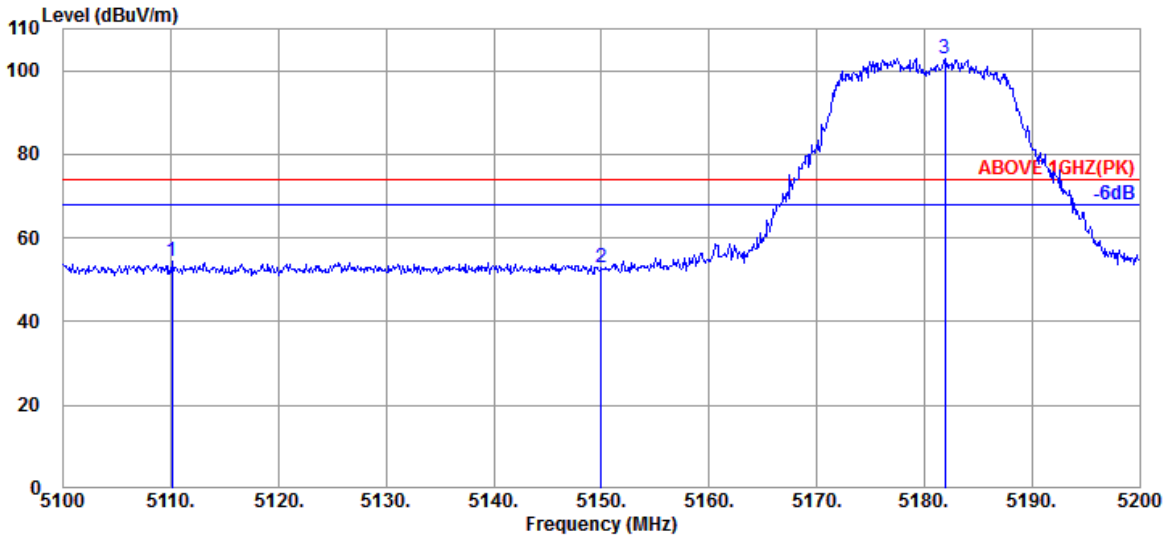

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.100	33.90	8.36	39.22	51.30	54.34	74.00	19.66	Peak
5150.000	34.10	8.39	39.21	49.49	52.77	74.00	21.23	Peak
@ 5181.900	34.23	8.41	39.21	99.38	102.81	---	---	Peak

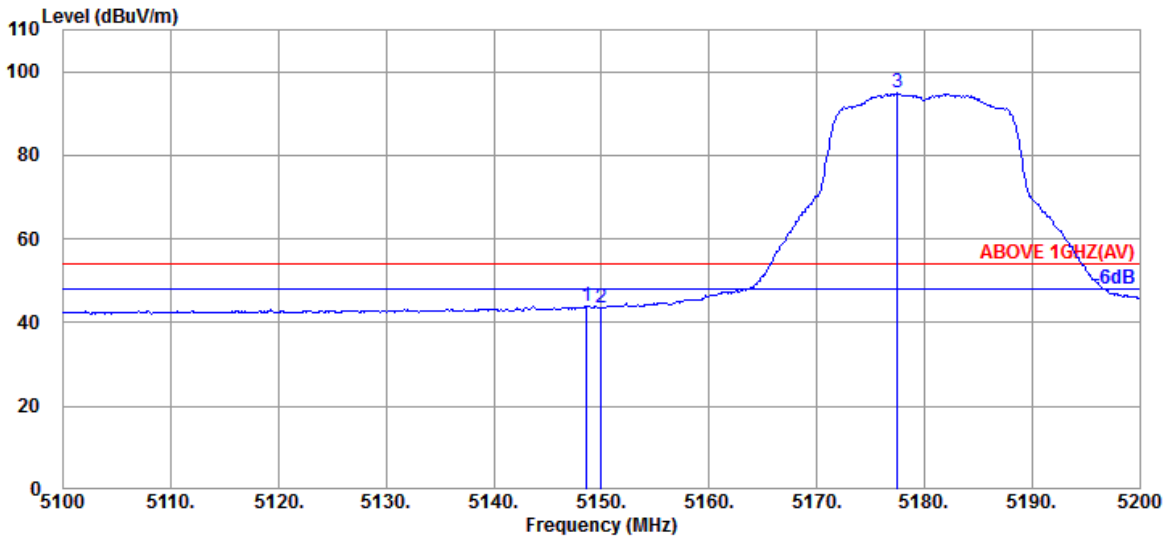


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.10	8.39	39.21	40.67	43.95	54.00	10.05	Average
5150.000	34.10	8.39	39.21	40.31	43.59	54.00	10.41	Average
@ 5177.500	34.23	8.41	39.21	91.46	94.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

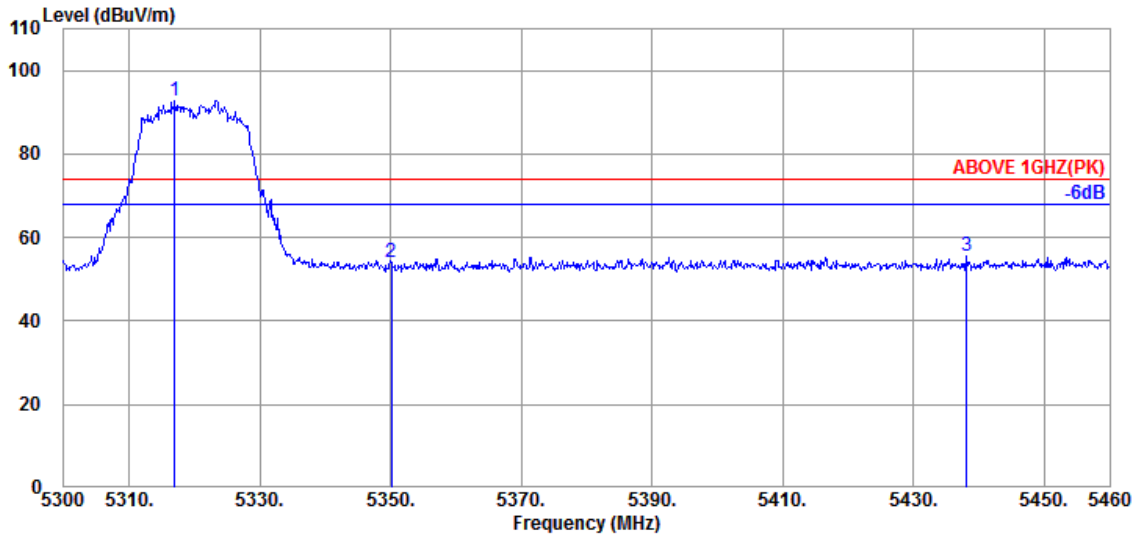

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.960	34.53	8.53	39.19	88.75	92.62	---	---	Peak
5350.080	34.60	8.56	39.19	50.06	54.03	74.00	19.97	Peak
5438.080	34.62	8.63	39.18	51.37	55.44	74.00	18.56	Peak

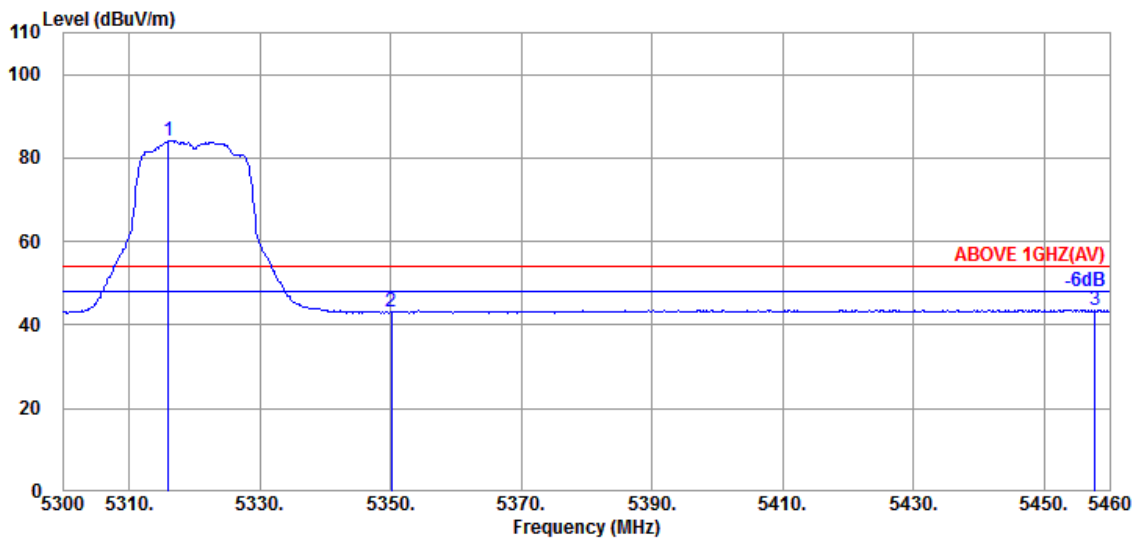


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	34.53	8.53	39.19	80.29	84.16	---	---	Average
5350.080	34.60	8.56	39.19	39.05	43.02	54.00	10.98	Average
5457.760	34.60	8.64	39.17	39.50	43.57	54.00	10.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

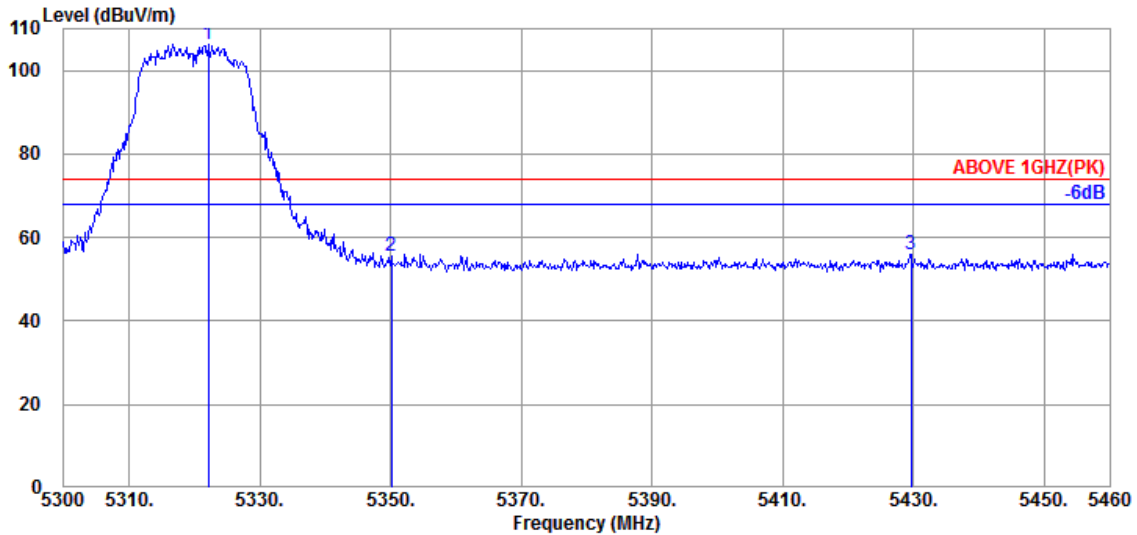

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.080	34.53	8.53	39.19	102.35	106.22	---	---	Peak
5350.080	34.60	8.56	39.19	51.41	55.38	74.00	18.62	Peak
5429.600	34.65	8.63	39.18	51.85	55.95	74.00	18.05	Peak

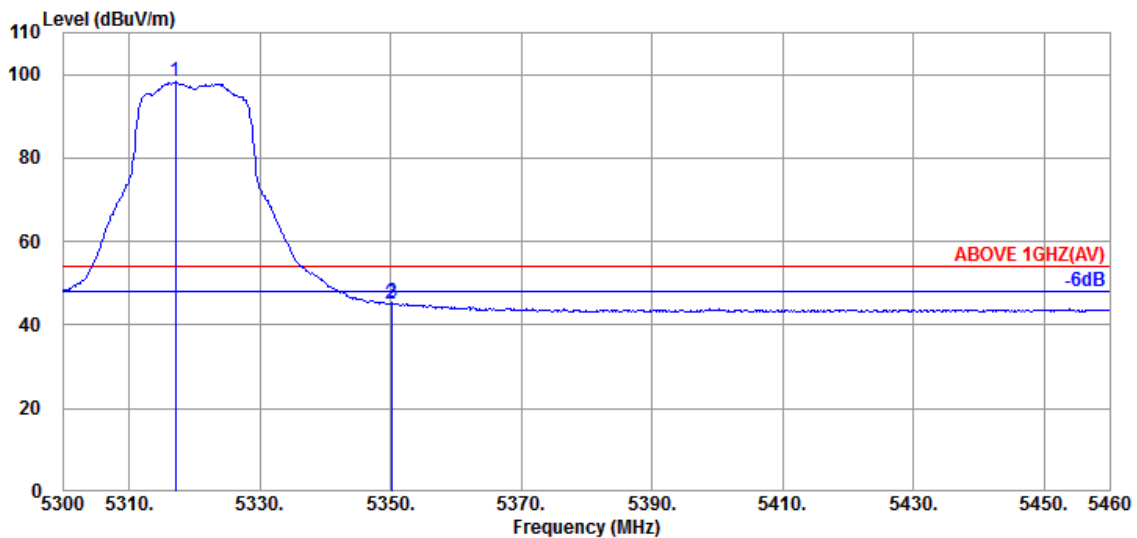


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.53	8.53	39.19	94.32	98.19	---	---	Average
5350.080	34.60	8.56	39.19	41.25	45.22	54.00	8.78	Average
5350.240	34.60	8.56	39.19	41.32	45.29	54.00	8.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

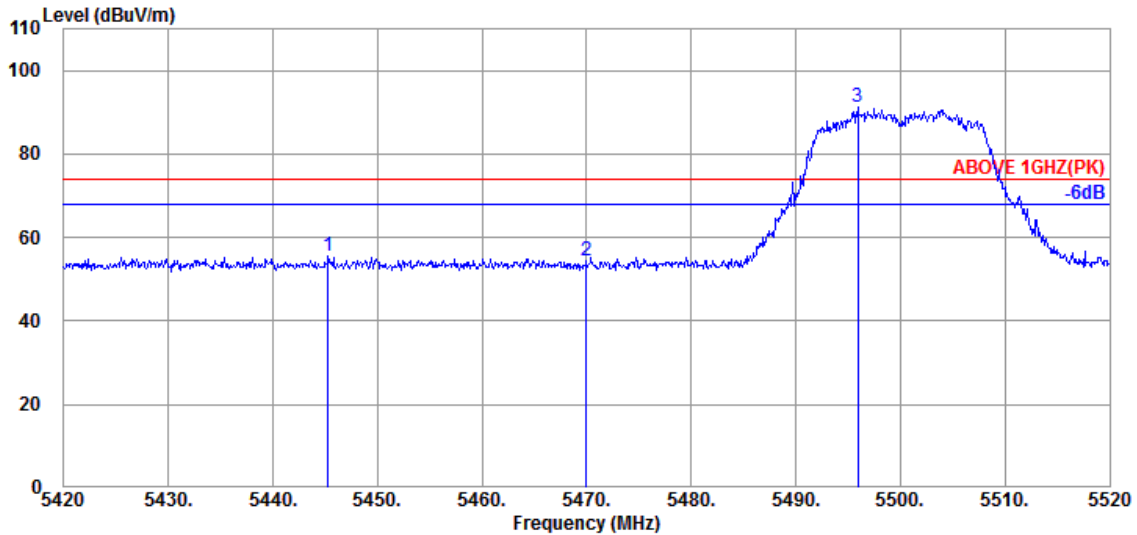

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.300	34.62	8.63	39.18	51.49	55.56	74.00	18.44	Peak
5470.000	34.57	8.65	39.17	50.22	54.27	74.00	19.73	Peak
@ 5495.900	34.50	8.67	39.17	87.14	91.14	---	---	Peak

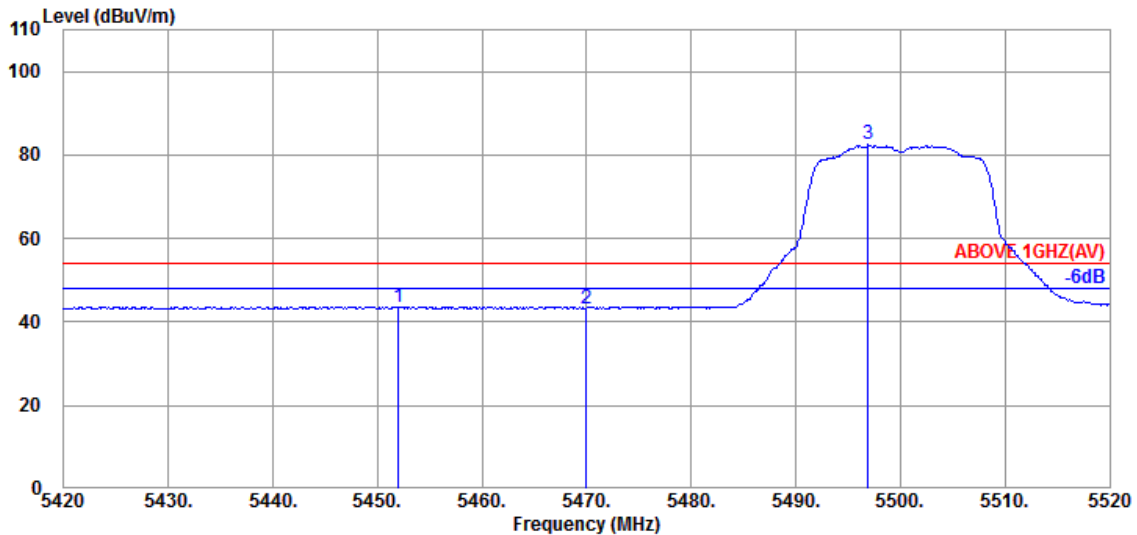


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.000	34.60	8.64	39.17	39.60	43.67	54.00	10.33	Average
5470.000	34.57	8.65	39.17	39.30	43.35	54.00	10.65	Average
@ 5496.900	34.50	8.68	39.17	78.51	82.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

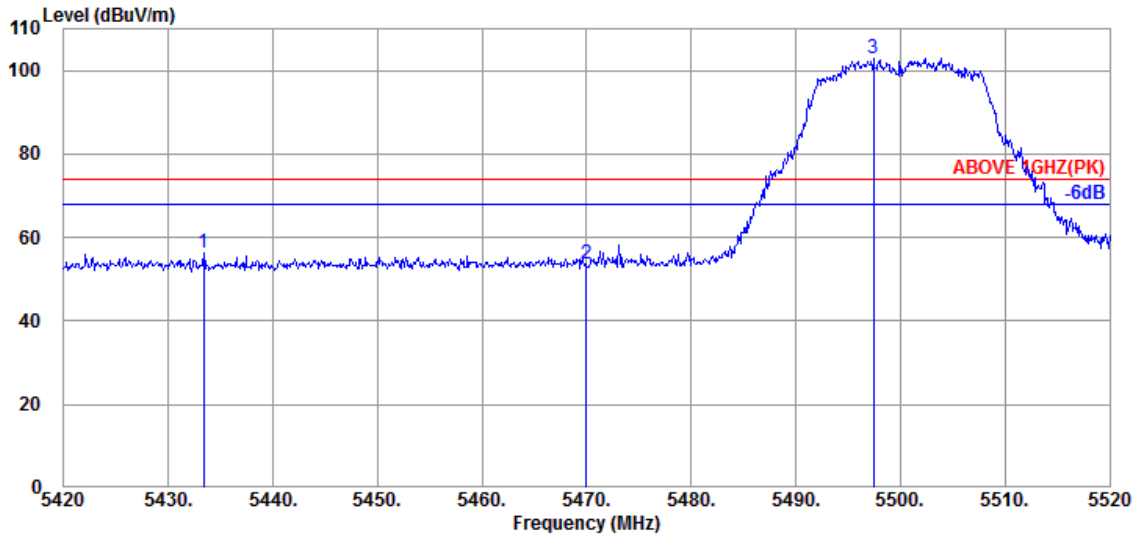

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.400	34.62	8.63	39.18	52.15	56.22	74.00	17.78	Peak
5470.000	34.57	8.65	39.17	49.57	53.62	74.00	20.38	Peak
@ 5497.400	34.50	8.68	39.17	98.90	102.91	---	---	Peak

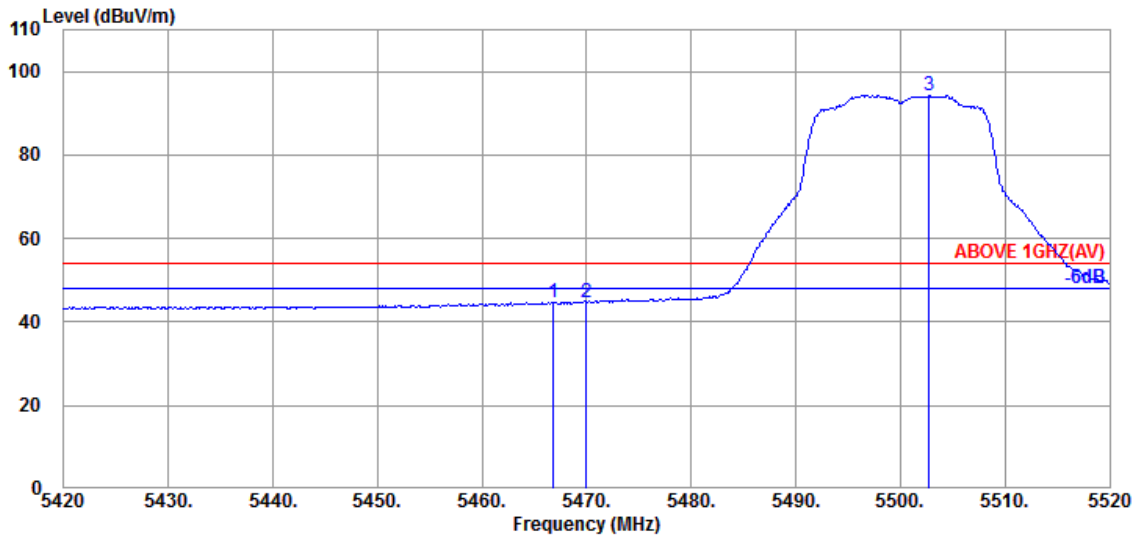


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.57	8.65	39.17	40.73	44.78	54.00	9.22	Average
5470.000	34.57	8.65	39.17	40.49	44.54	54.00	9.46	Average
@ 5502.700	34.50	8.68	39.17	90.27	94.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5700MHz

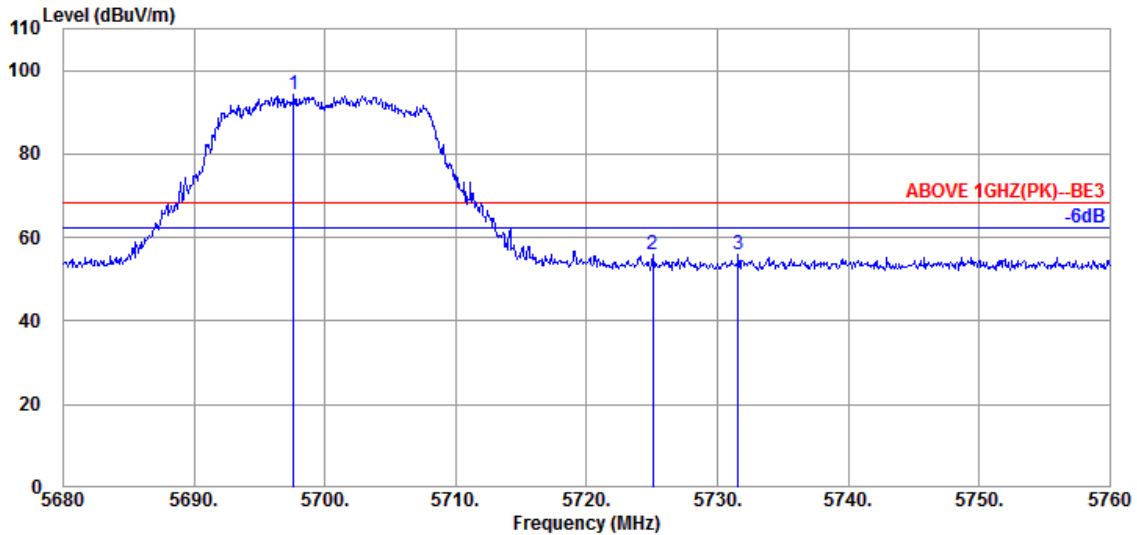

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.600	34.50	8.84	39.22	89.98	94.10	---	---	Peak
5725.040	34.50	8.86	39.23	51.91	56.04	68.20	12.16	Peak
5731.600	34.50	8.86	39.23	51.63	55.76	68.20	12.44	Peak

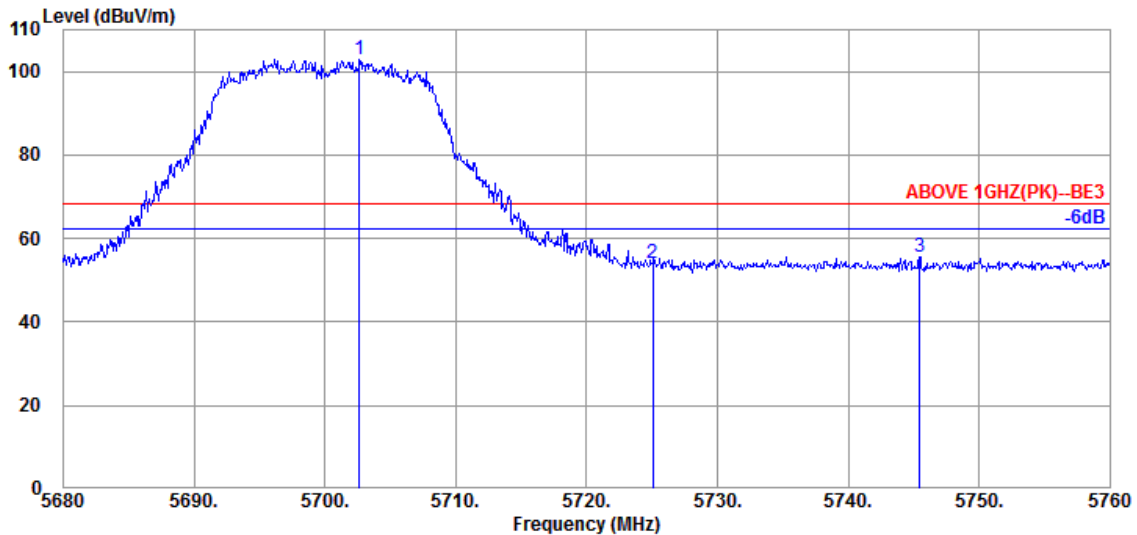


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.640	34.50	8.85	39.22	98.84	102.97	---	---	Peak
5725.040	34.50	8.86	39.23	50.05	54.18	68.20	14.02	Peak
5745.440	34.50	8.88	39.24	51.54	55.68	68.20	12.52	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

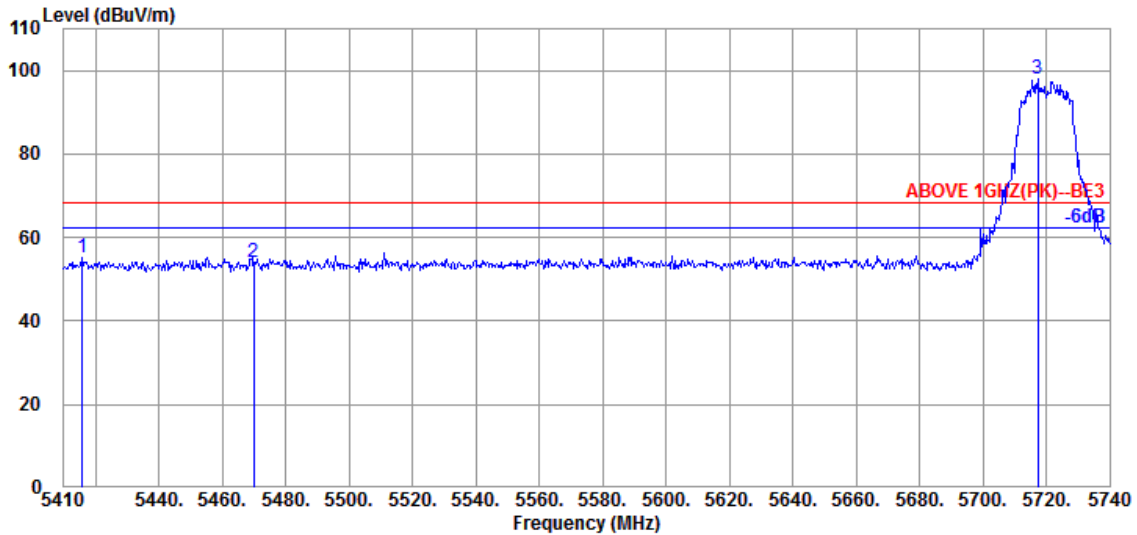

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.940	34.67	8.61	39.18	50.96	55.06	68.20	13.14	Peak
5470.060	34.57	8.65	39.17	49.98	54.03	68.20	14.17	Peak
@ 5717.230	34.50	8.85	39.23	94.01	98.13	---	---	Peak

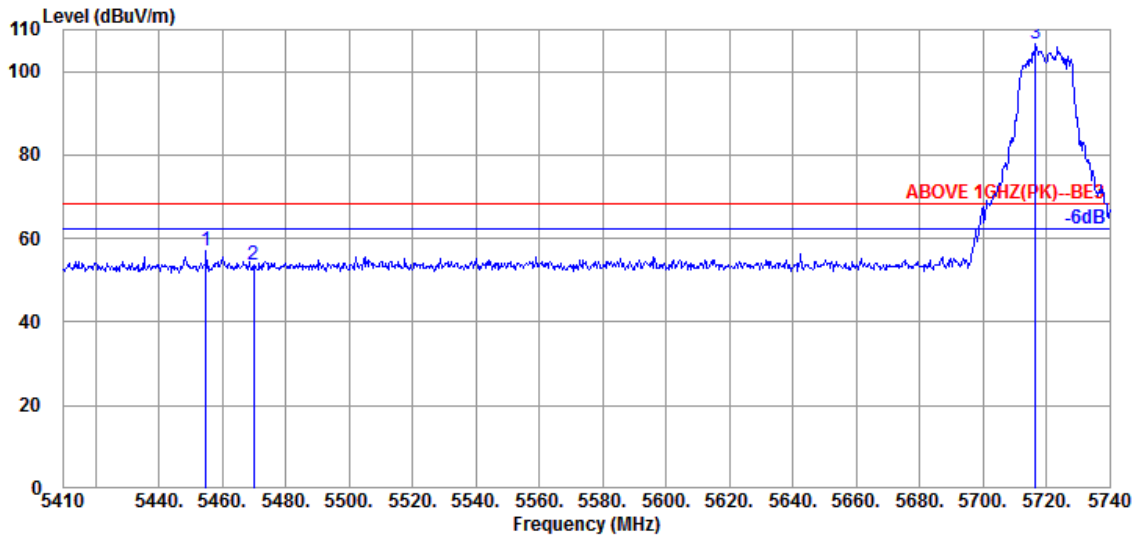


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.880	34.60	8.64	39.17	53.08	57.15	68.20	11.05	Peak
5470.060	34.57	8.65	39.17	49.52	53.57	68.20	14.63	Peak
@ 5716.570	34.50	8.85	39.23	102.32	106.44	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

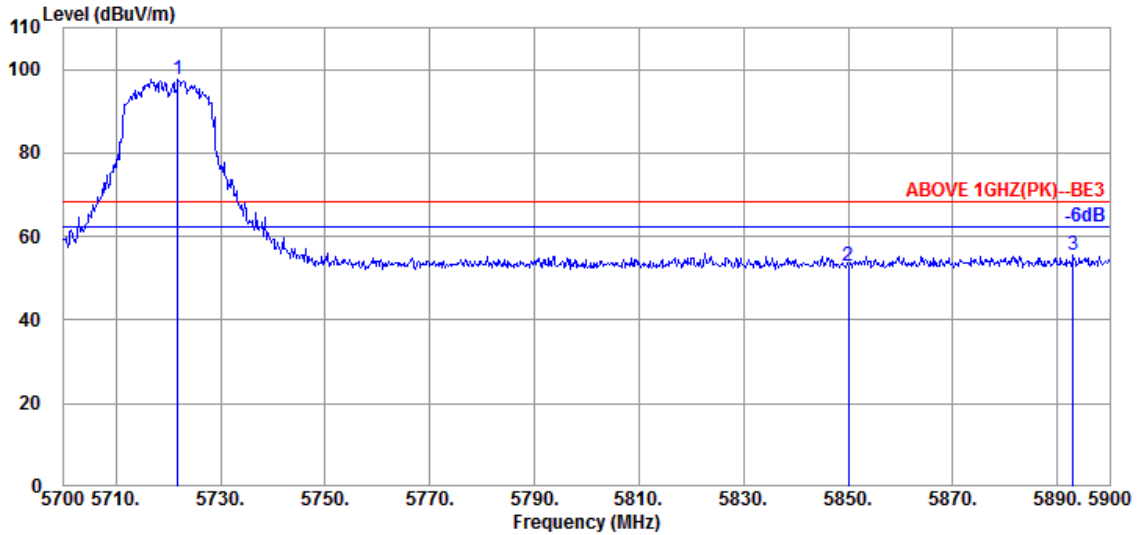

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.800	34.50	8.86	39.23	93.64	97.77	---	---	Peak
5850.000	34.40	8.96	39.26	48.86	52.96	68.20	15.24	Peak
5893.000	34.50	9.01	39.27	51.18	55.42	68.20	12.78	Peak

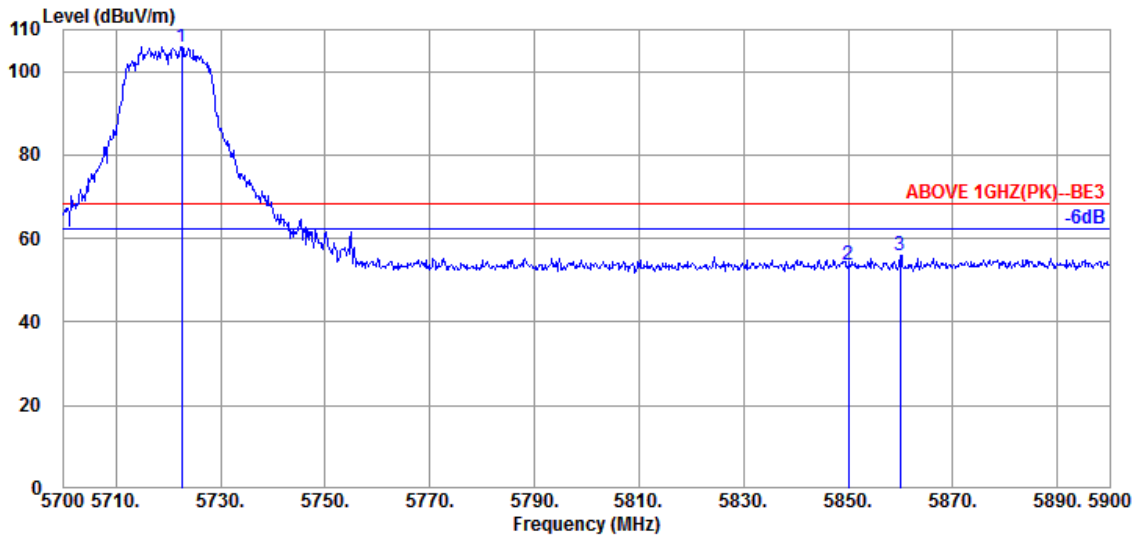


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.600	34.50	8.86	39.23	101.93	106.06	---	---	Peak
5850.000	34.40	8.96	39.26	49.43	53.53	68.20	14.67	Peak
5860.000	34.43	8.98	39.27	51.90	56.04	68.20	12.16	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

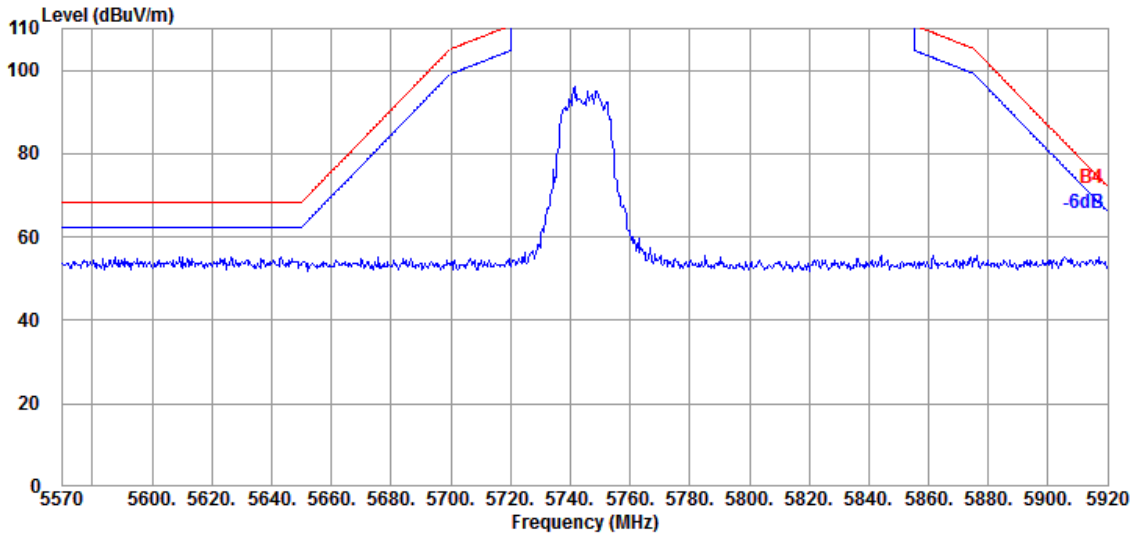


Antenna at Vertical Polarization

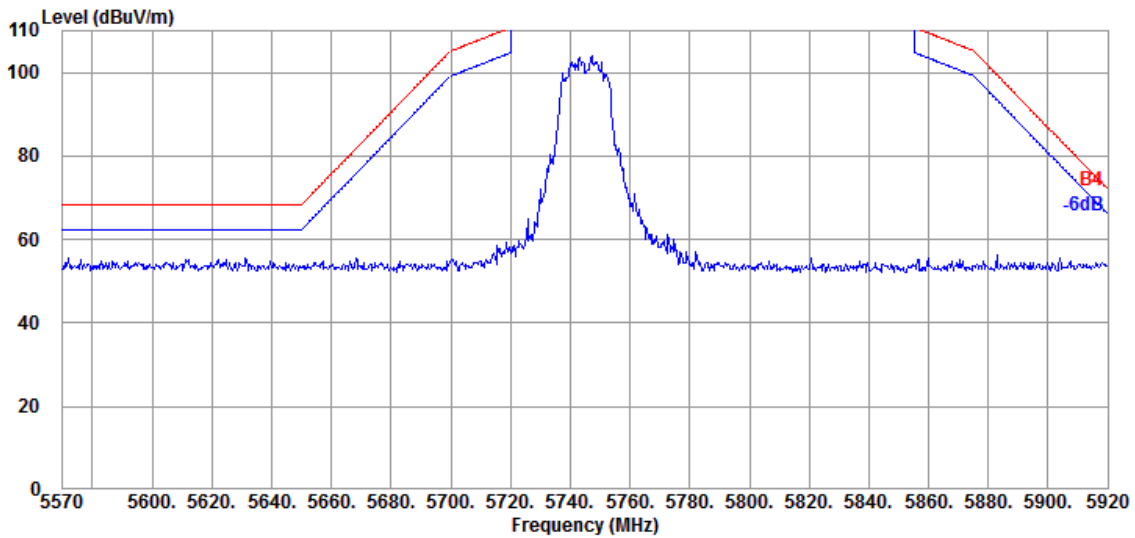




Mode	802.11a	Band	NII-III
		Frequency	TX 5825MHz


### Antenna at Horizontal Polarization

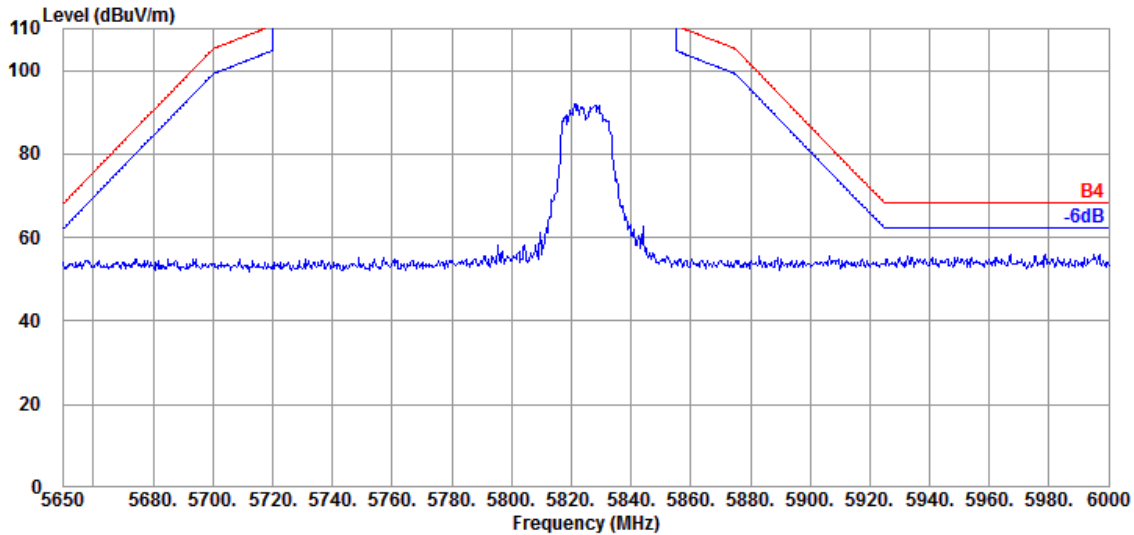

### Antenna at Vertical Polarization

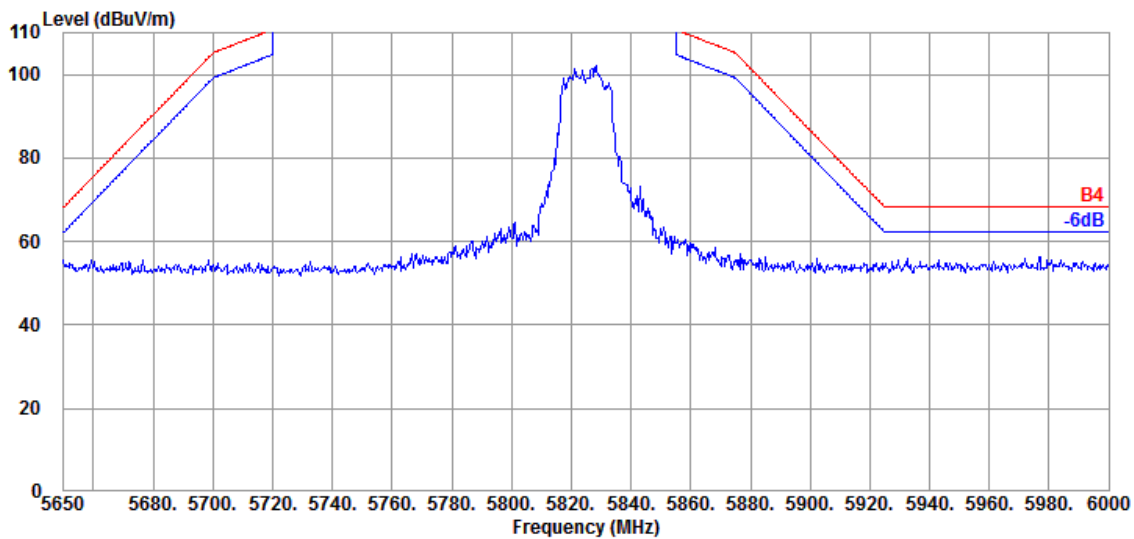


Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

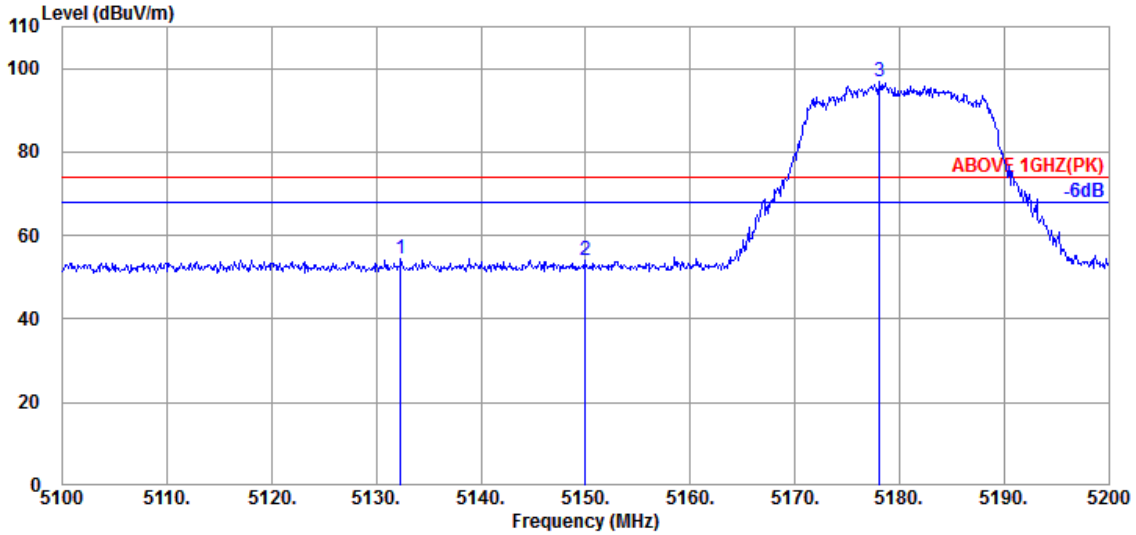

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.300	34.03	8.37	39.21	51.23	54.42	74.00	19.58	Peak
5150.000	34.10	8.39	39.21	50.67	53.95	74.00	20.05	Peak
@ 5178.100	34.23	8.41	39.21	93.29	96.72	---	---	Peak

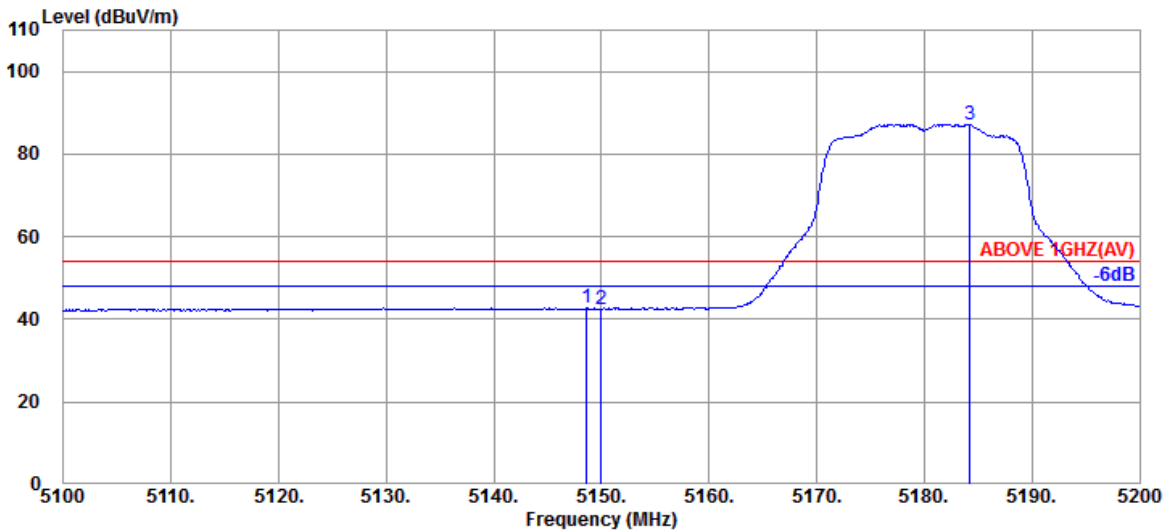


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.10	8.39	39.21	39.41	42.69	54.00	11.31	Average
5150.000	34.10	8.39	39.21	39.25	42.53	54.00	11.47	Average
@ 5184.200	34.23	8.41	39.21	83.81	87.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

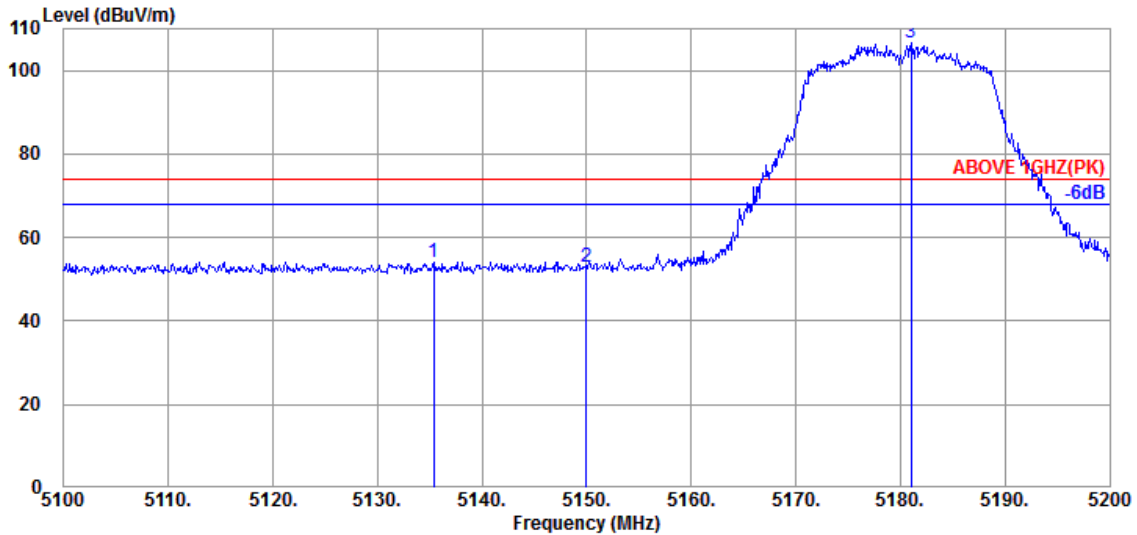

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.400	34.03	8.37	39.21	51.03	54.22	74.00	19.78	Peak
5150.000	34.10	8.39	39.21	49.54	52.82	74.00	21.18	Peak
@ 5181.000	34.23	8.41	39.21	103.12	106.55	---	---	Peak

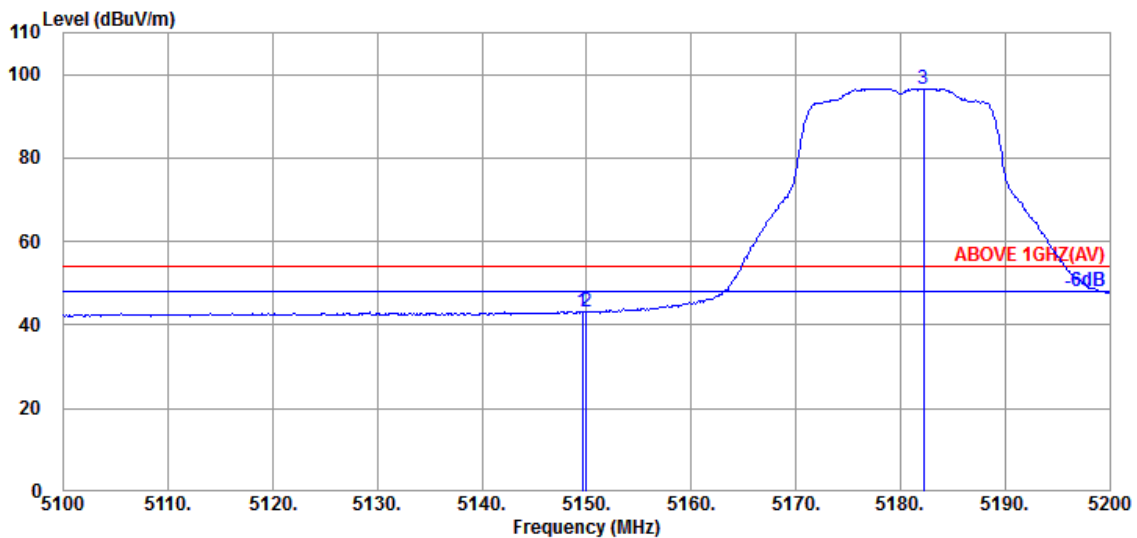


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.10	8.39	39.21	40.01	43.29	54.00	10.71	Average
5150.000	34.10	8.39	39.21	39.91	43.19	54.00	10.81	Average
@ 5182.200	34.23	8.41	39.21	93.24	96.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

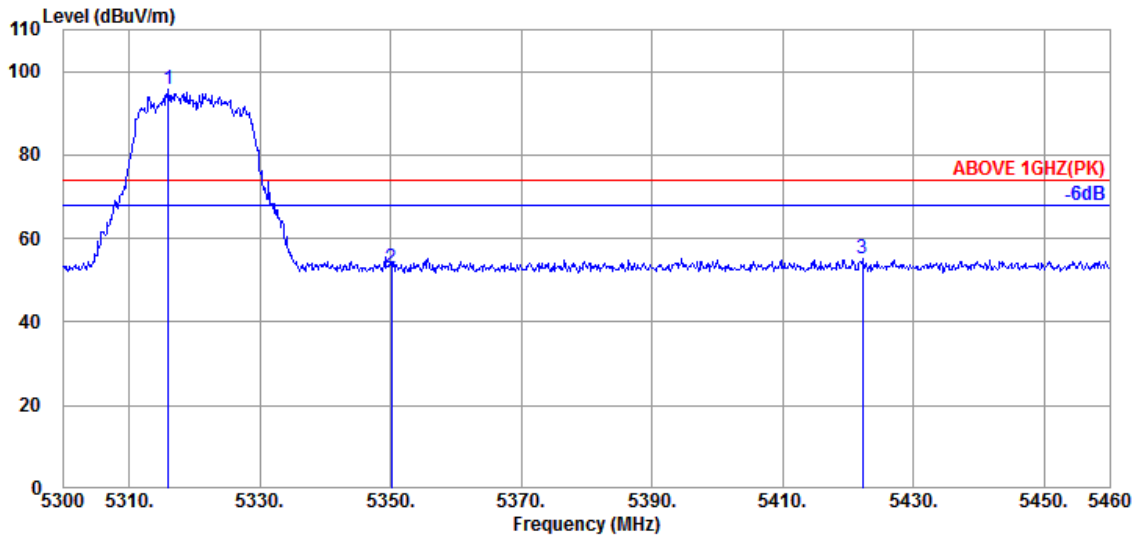

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	34.53	8.53	39.19	91.70	95.57	---	---	Peak
5350.080	34.60	8.56	39.19	49.01	52.98	74.00	21.02	Peak
5422.240	34.65	8.61	39.18	50.98	55.06	74.00	18.94	Peak

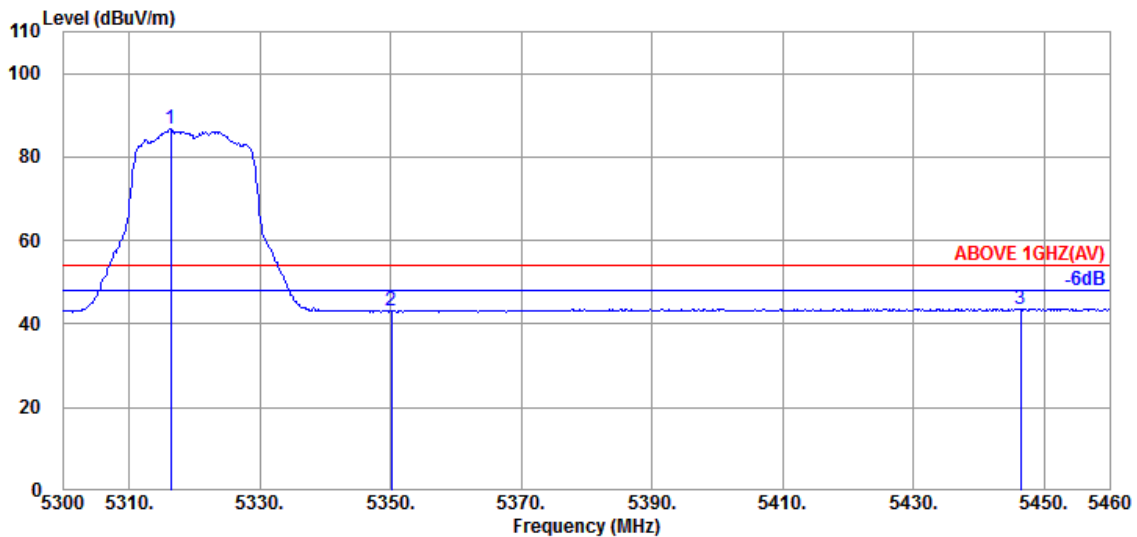


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.320	34.53	8.53	39.19	82.71	86.58	---	---	Average
5350.080	34.60	8.56	39.19	39.11	43.08	54.00	10.92	Average
5446.400	34.62	8.64	39.18	39.55	43.63	54.00	10.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

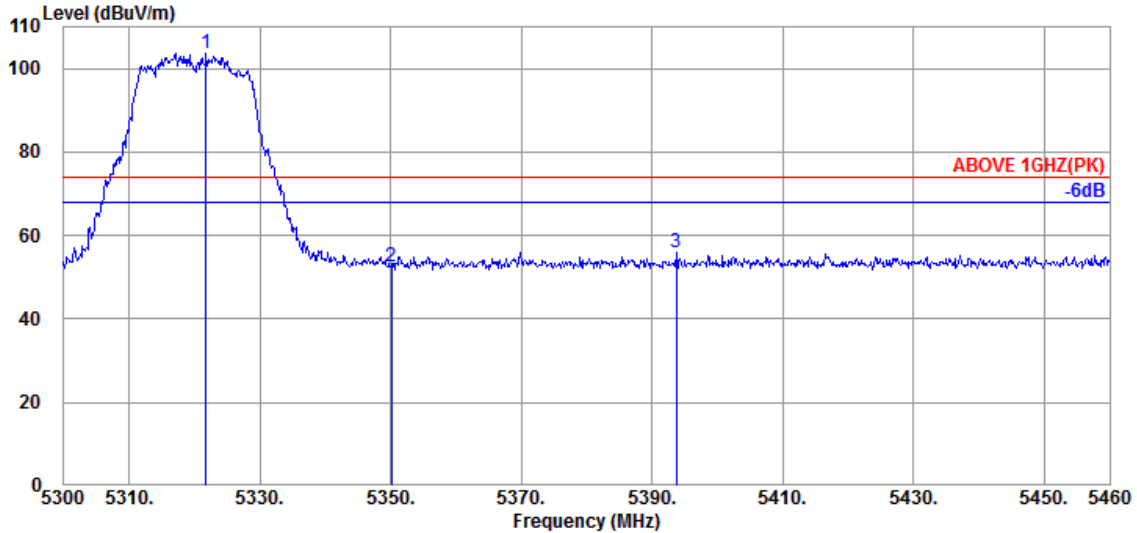

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.760	34.53	8.53	39.19	99.68	103.55	---	---	Peak
5350.080	34.60	8.56	39.19	48.57	52.54	74.00	21.46	Peak
5393.760	34.70	8.58	39.18	51.90	56.00	74.00	18.00	Peak

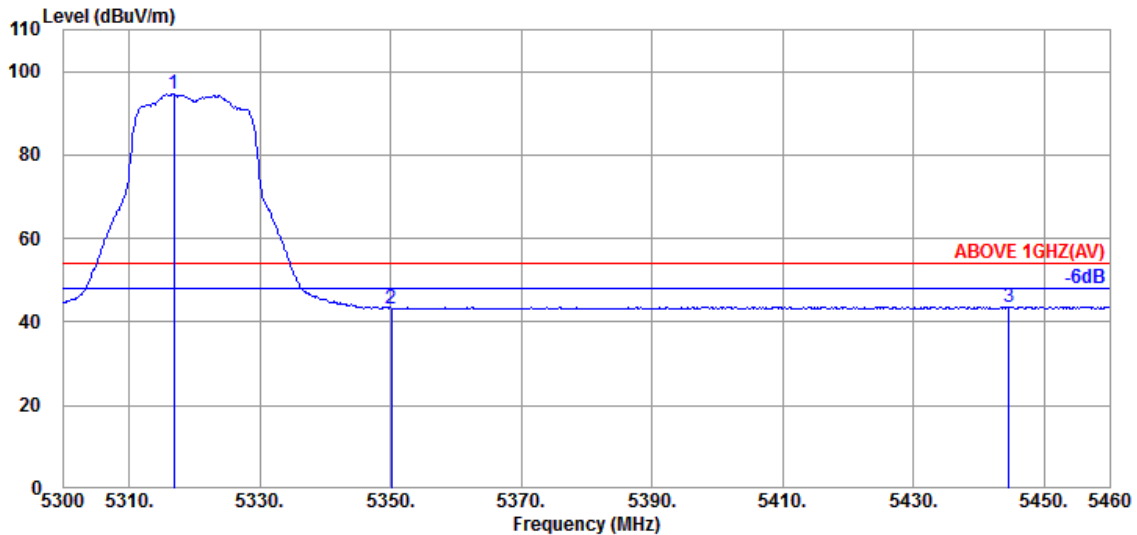


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.53	8.53	39.19	90.82	94.69	---	---	Average
5350.080	34.60	8.56	39.19	39.22	43.19	54.00	10.81	Average
5444.640	34.62	8.63	39.18	39.62	43.69	54.00	10.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

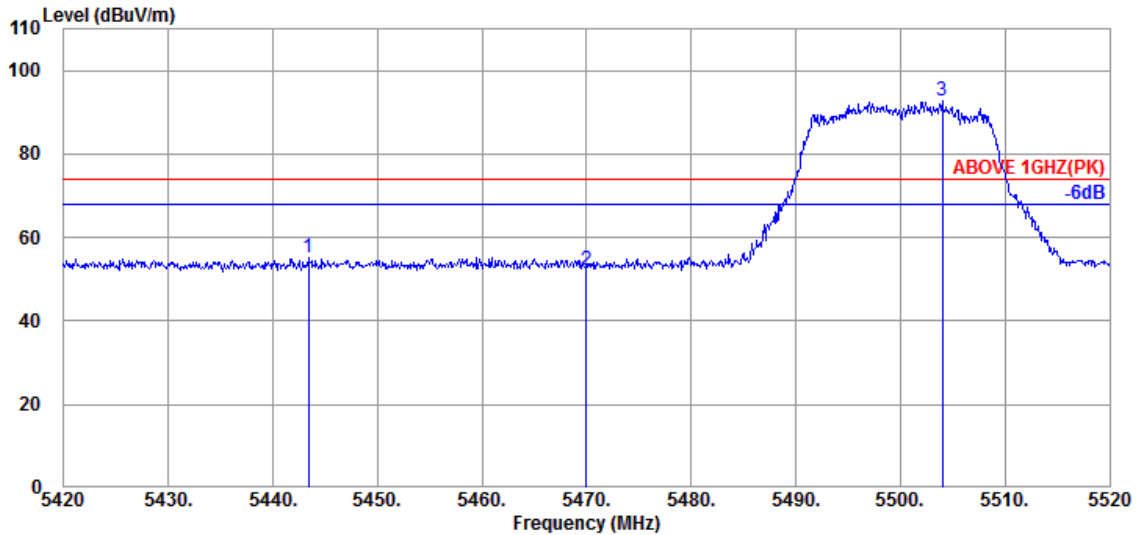

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.400	34.62	8.63	39.18	51.07	55.14	74.00	18.86	Peak
5470.000	34.57	8.65	39.17	48.09	52.14	74.00	21.86	Peak
@ 5504.000	34.50	8.68	39.17	88.70	92.71	---	---	Peak

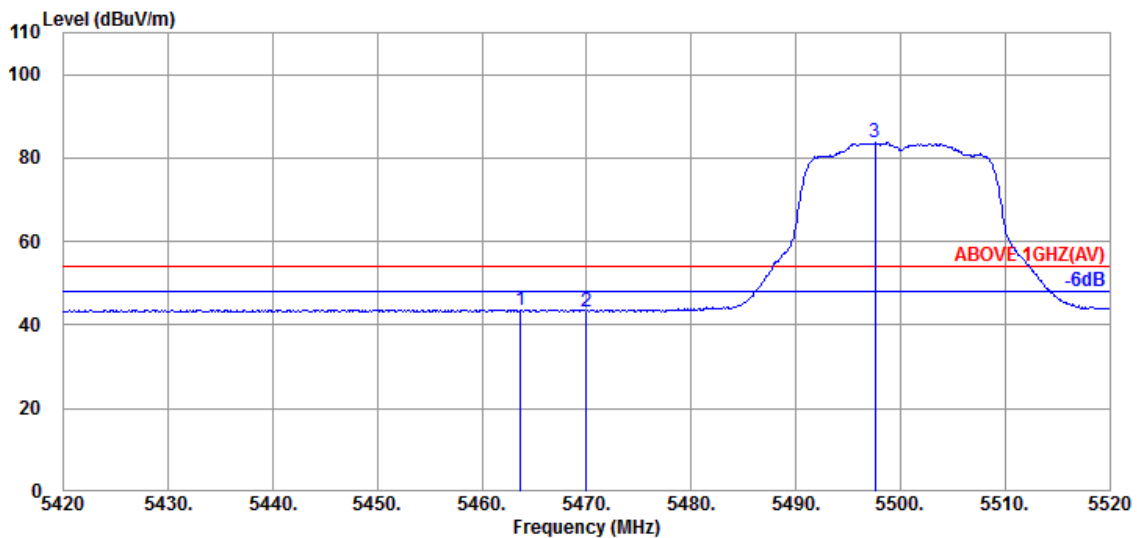


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.700	34.57	8.65	39.17	39.62	43.67	54.00	10.33	Average
5470.000	34.57	8.65	39.17	39.27	43.32	54.00	10.68	Average
@ 5497.600	34.50	8.68	39.17	79.60	83.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

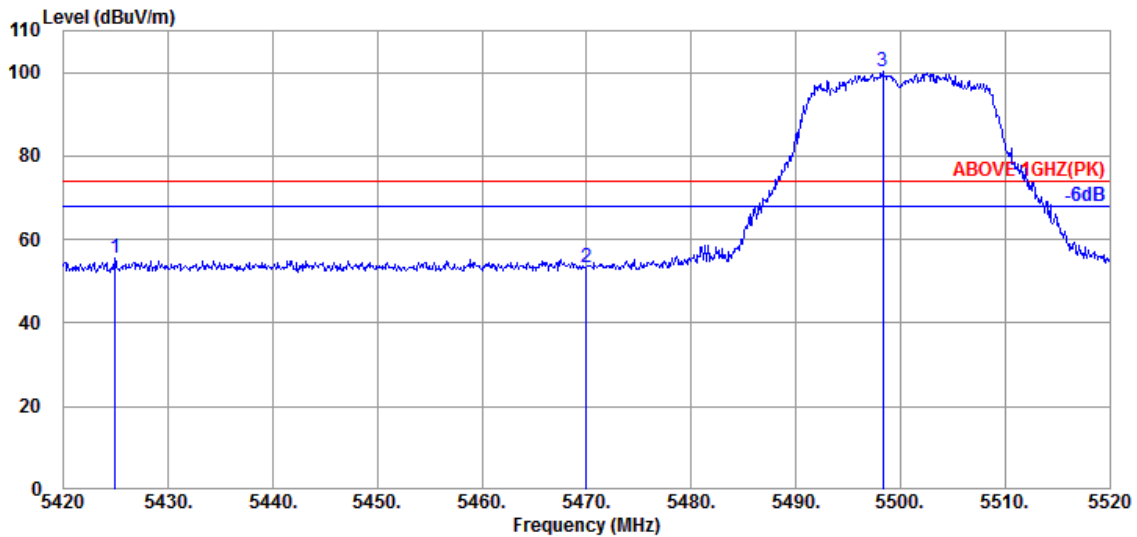

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.900	34.65	8.61	39.18	51.31	55.39	74.00	18.61	Peak
5470.000	34.57	8.65	39.17	49.19	53.24	74.00	20.76	Peak
@ 5498.300	34.50	8.68	39.17	96.08	100.09	---	---	Peak

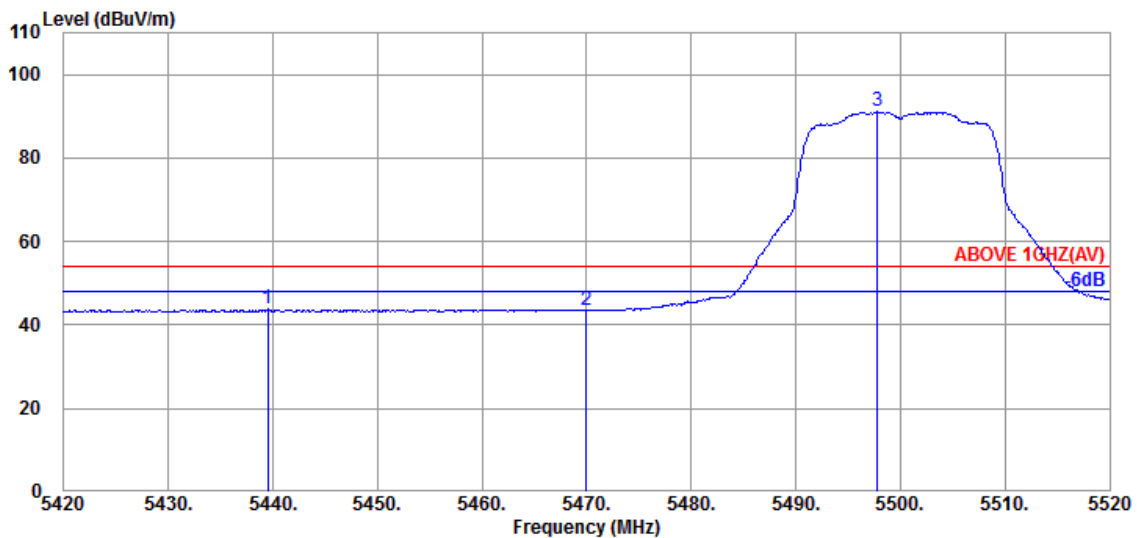


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.500	34.62	8.63	39.18	39.72	43.79	54.00	10.21	Average
5470.000	34.57	8.65	39.17	39.37	43.42	54.00	10.58	Average
@ 5497.800	34.50	8.68	39.17	87.07	91.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5700MHz

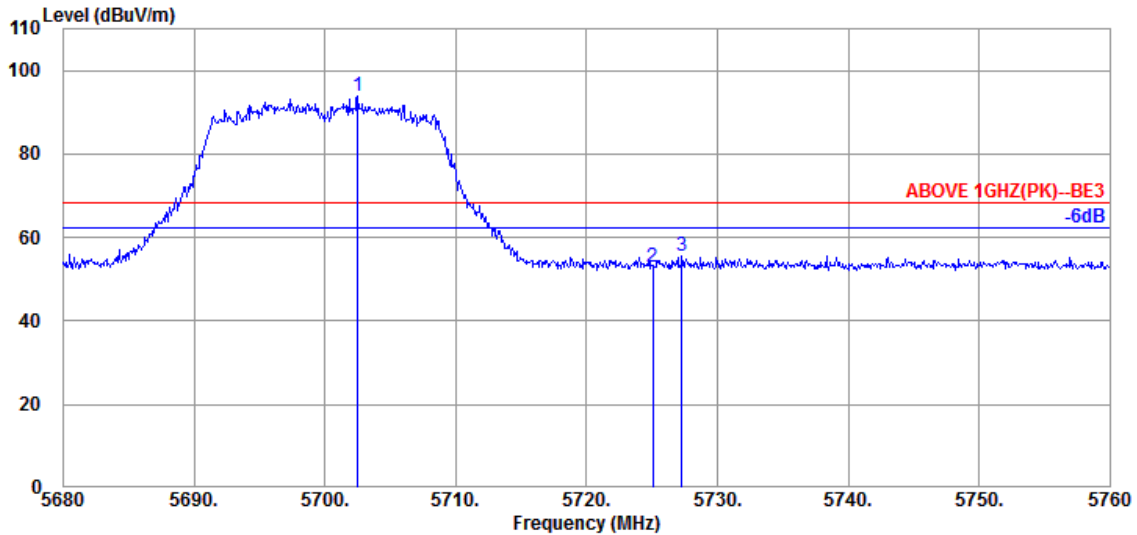

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.480	34.50	8.85	39.22	89.67	93.80	---	---	Peak
5725.040	34.50	8.86	39.23	48.79	52.92	68.20	15.28	Peak
5727.280	34.50	8.86	39.23	51.32	55.45	68.20	12.75	Peak

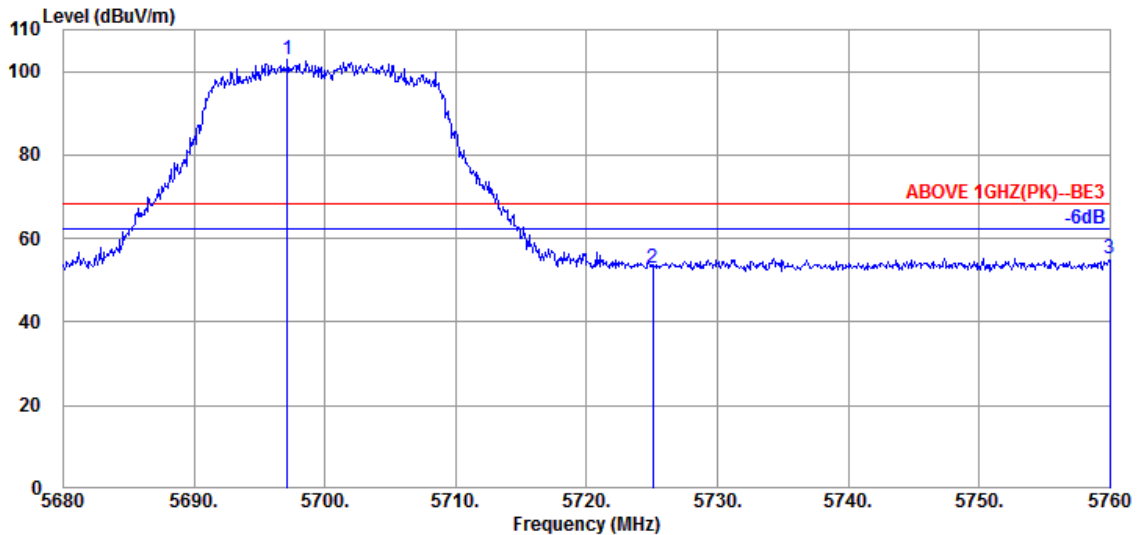


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.120	34.50	8.84	39.22	98.82	102.94	---	---	Peak
5725.040	34.50	8.86	39.23	48.82	52.95	68.20	15.25	Peak
5760.000	34.47	8.89	39.24	51.22	55.34	68.20	12.86	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

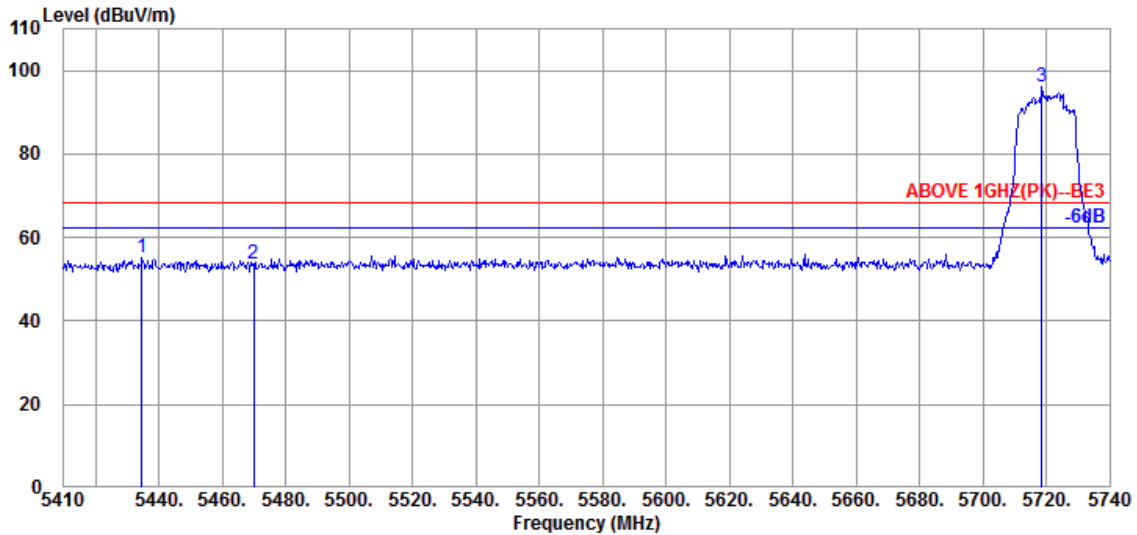

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.750	34.62	8.63	39.18	50.99	55.06	68.20	13.14	Peak
5470.060	34.57	8.65	39.17	49.76	53.81	68.20	14.39	Peak
@ 5718.550	34.50	8.86	39.23	91.99	96.12	---	---	Peak

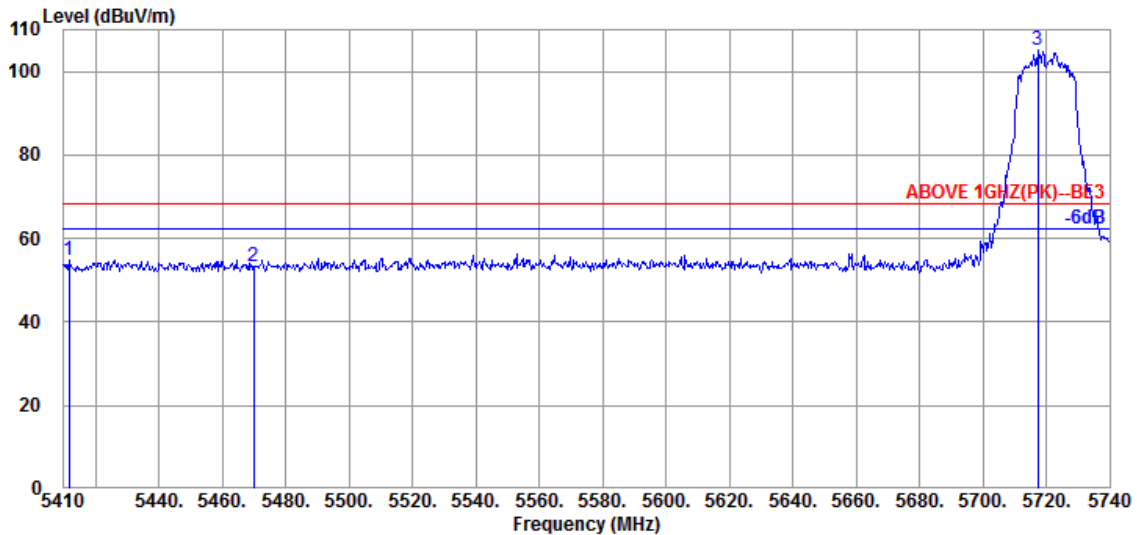


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.650	34.67	8.61	39.18	50.84	54.94	68.20	13.26	Peak
5470.060	34.57	8.65	39.17	49.41	53.46	68.20	14.74	Peak
@ 5717.230	34.50	8.85	39.23	101.12	105.24	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

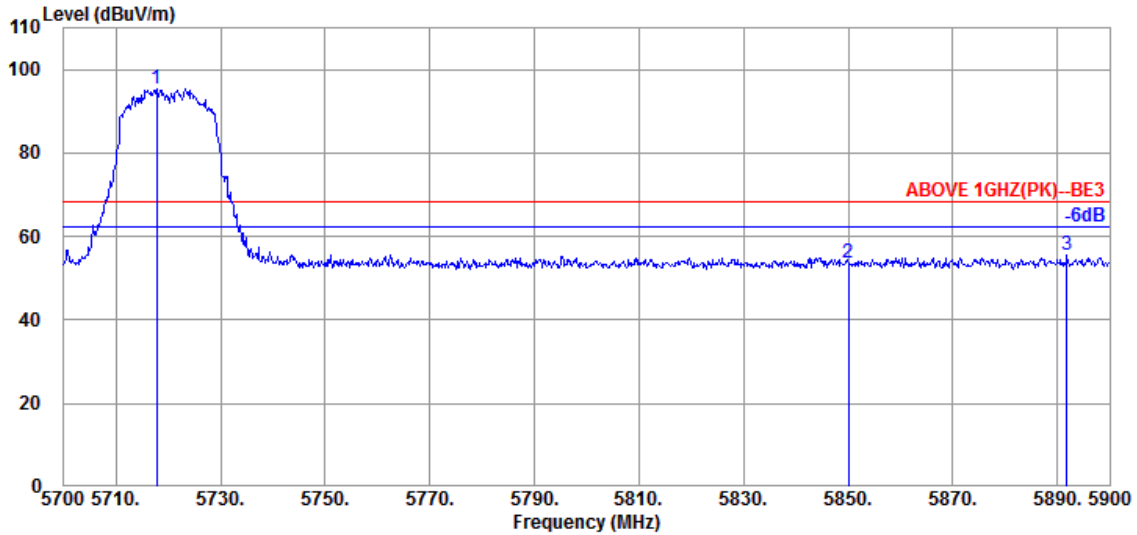

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.800	34.50	8.86	39.23	91.24	95.37	---	---	Peak
5850.000	34.40	8.96	39.26	49.63	53.73	68.20	14.47	Peak
5891.800	34.50	9.01	39.27	51.50	55.74	68.20	12.46	Peak

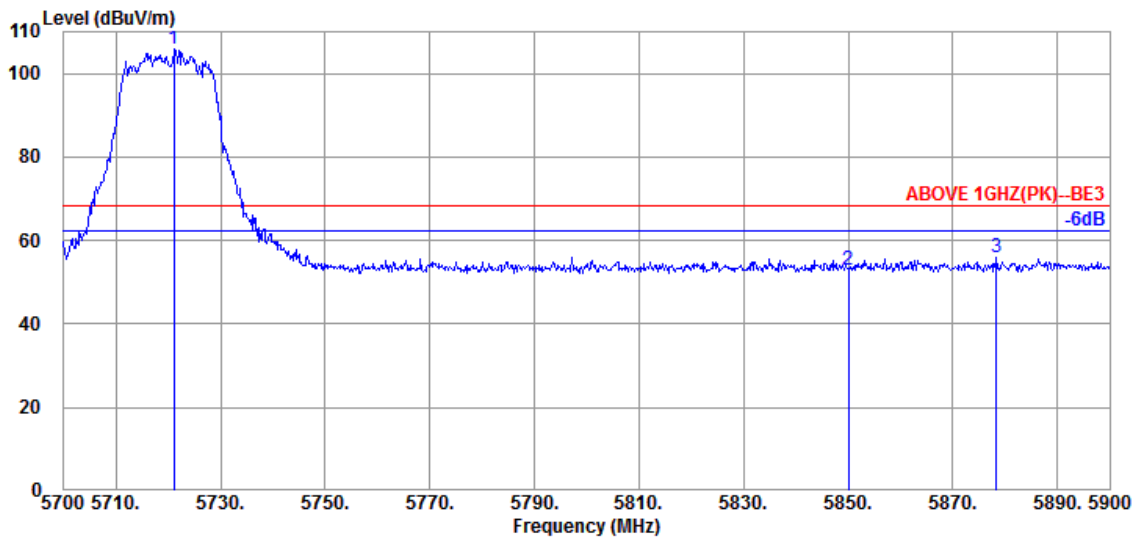


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.000	34.50	8.86	39.23	101.89	106.02	---	---	Peak
5850.000	34.40	8.96	39.26	48.92	53.02	68.20	15.18	Peak
5878.400	34.47	8.99	39.27	51.76	55.95	68.20	12.25	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

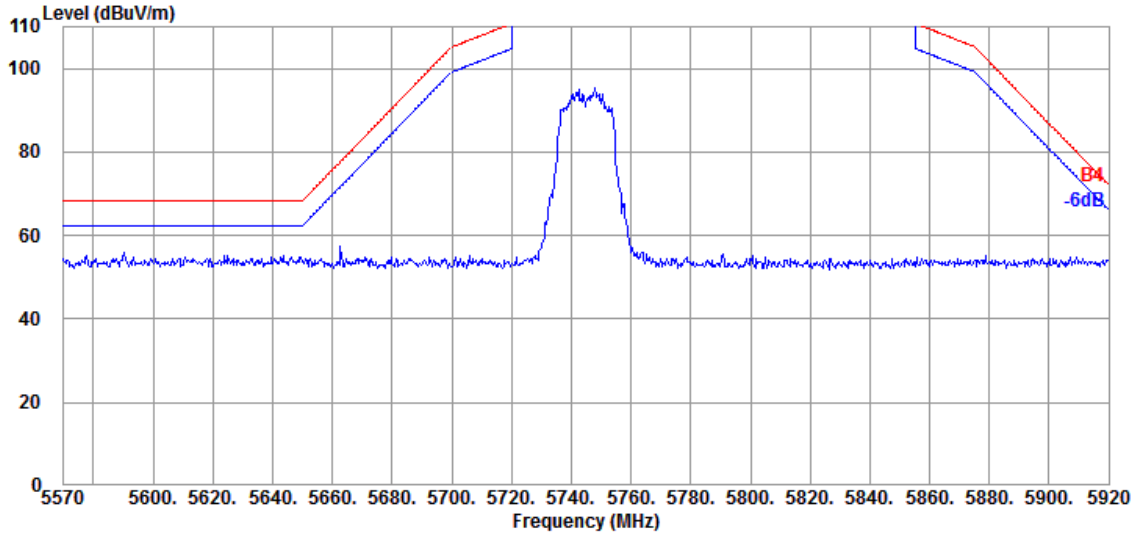


Antenna at Vertical Polarization

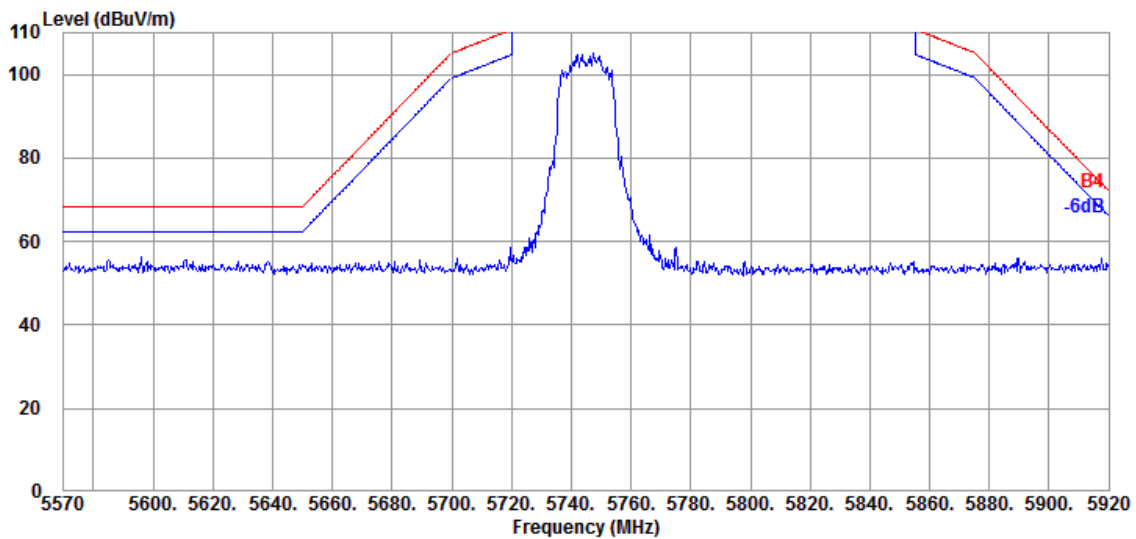


Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

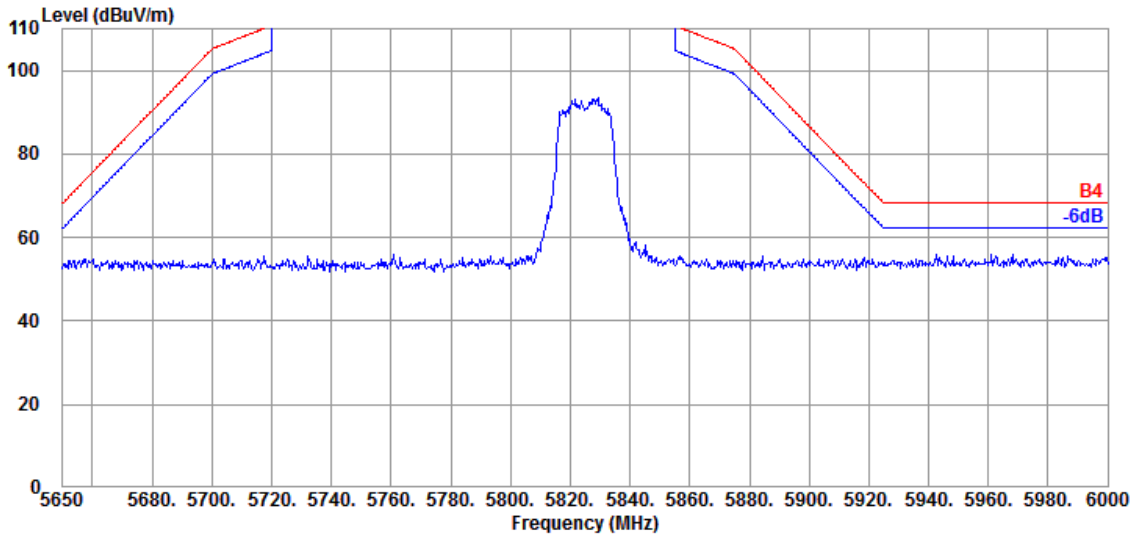

Antenna at Vertical Polarization

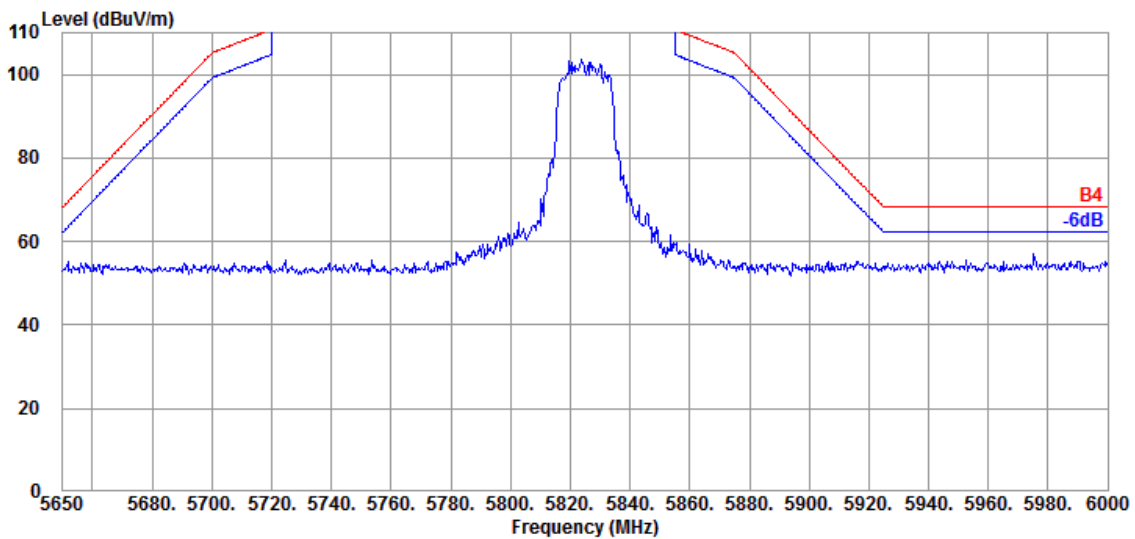


Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

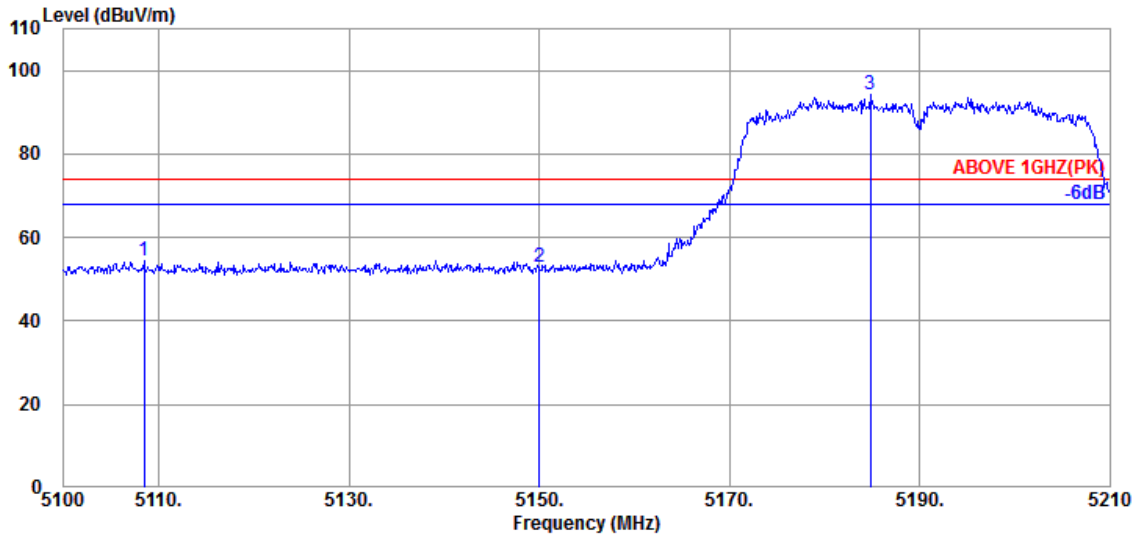

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.470	33.90	8.36	39.22	51.42	54.46	74.00	19.54	Peak
5150.050	34.10	8.39	39.21	49.65	52.93	74.00	21.07	Peak
@ 5184.810	34.23	8.41	39.21	90.63	94.06	---	---	Peak

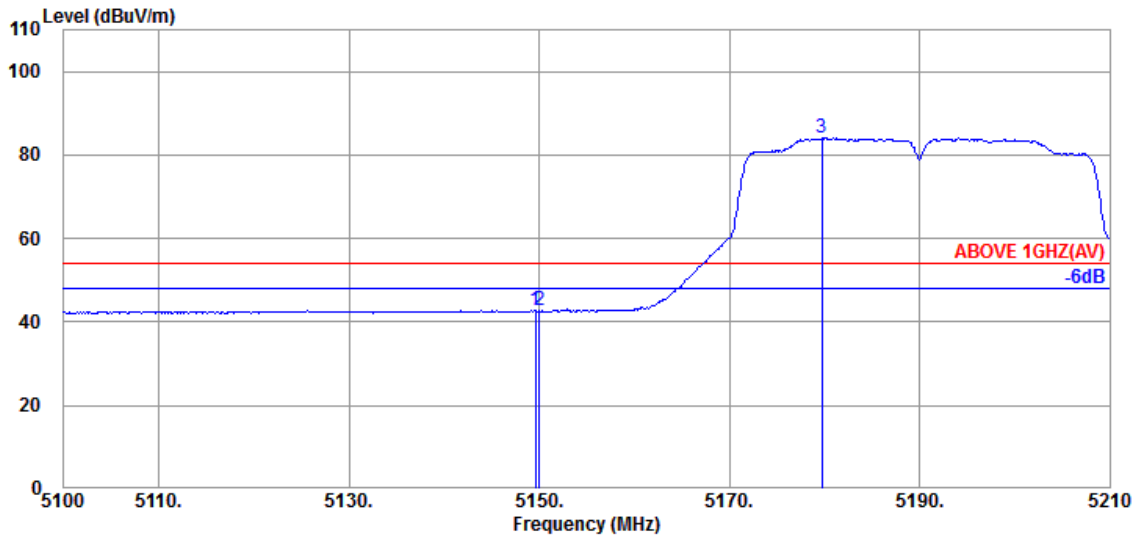


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.10	8.39	39.21	39.52	42.80	54.00	11.20	Average
5150.050	34.10	8.39	39.21	39.35	42.63	54.00	11.37	Average
@ 5179.750	34.23	8.41	39.21	80.69	84.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

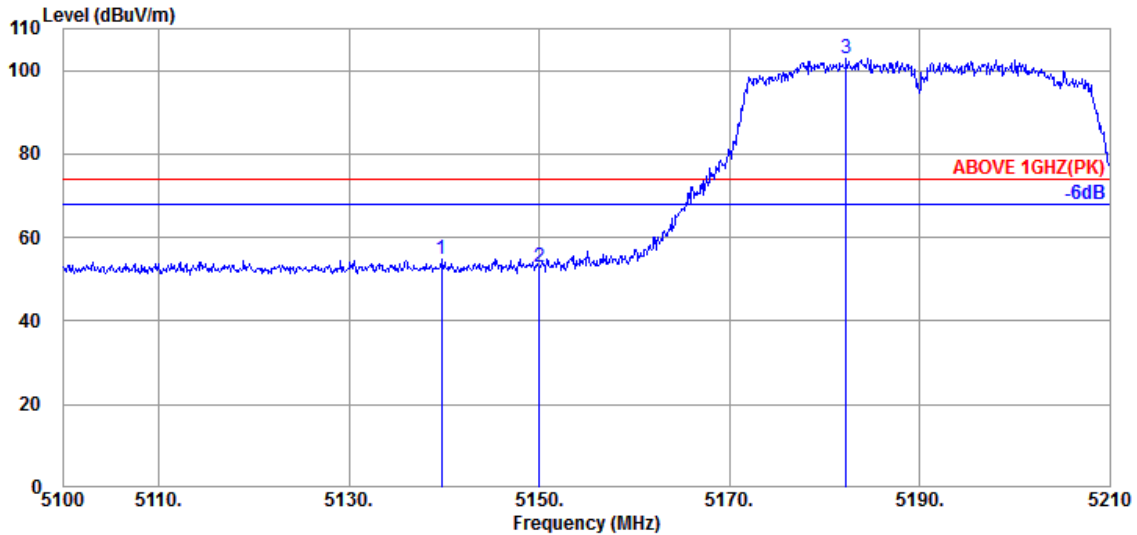

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.710	34.03	8.39	39.21	51.61	54.82	74.00	19.18	Peak
5150.050	34.10	8.39	39.21	49.82	53.10	74.00	20.90	Peak
@ 5182.280	34.23	8.41	39.21	99.62	103.05	---	---	Peak

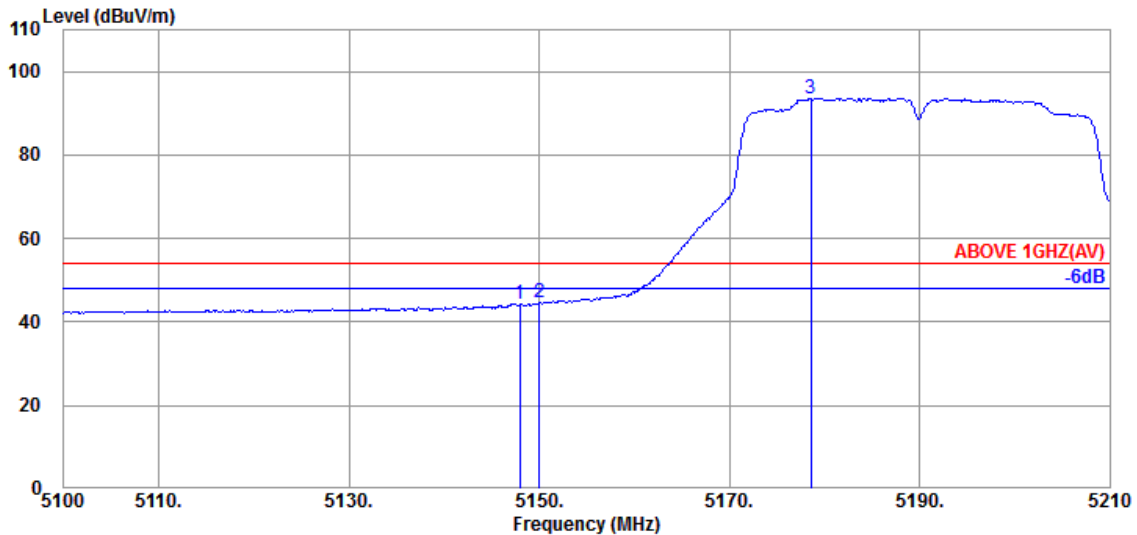


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.960	34.10	8.39	39.21	41.14	44.42	54.00	9.58	Average
5150.050	34.10	8.39	39.21	41.30	44.58	54.00	9.42	Average
@ 5178.540	34.23	8.41	39.21	90.22	93.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

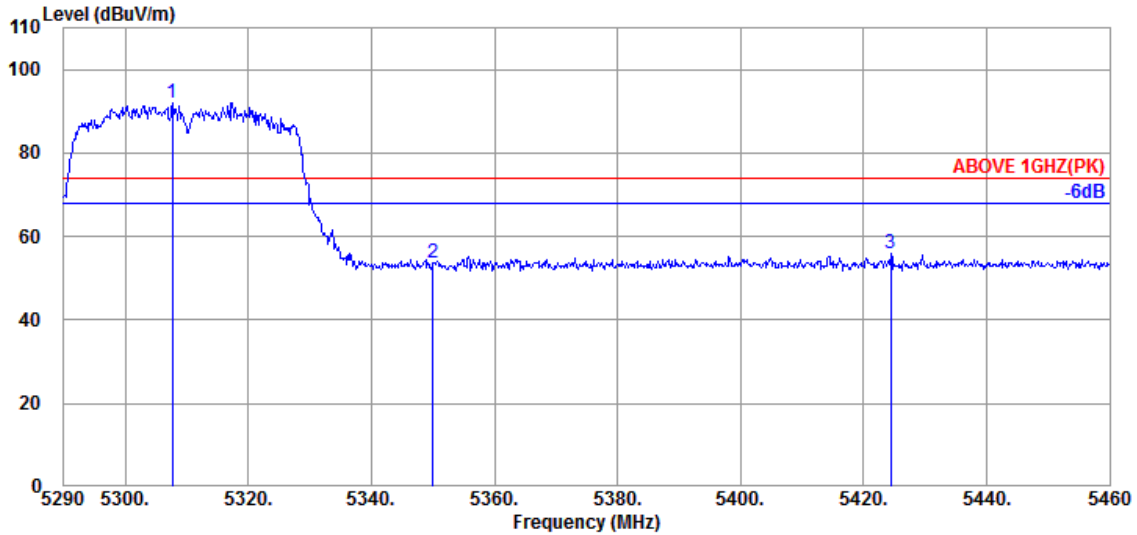

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.680	34.50	8.51	39.19	88.25	92.07	---	---	Peak
5350.010	34.60	8.56	39.19	49.69	53.66	74.00	20.34	Peak
5424.470	34.65	8.61	39.18	51.84	55.92	74.00	18.08	Peak

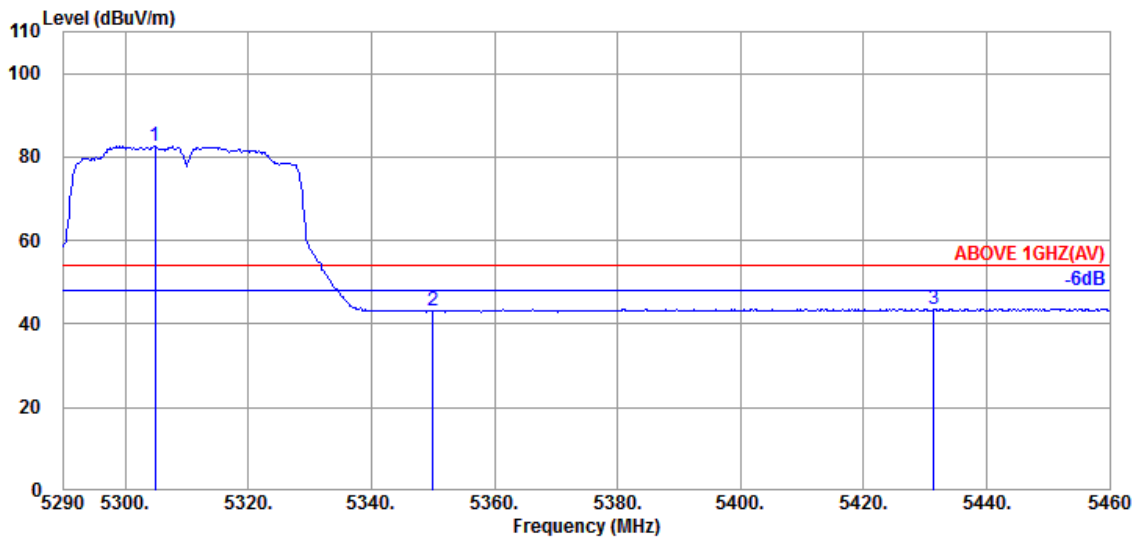


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.790	34.50	8.51	39.19	78.71	82.53	---	---	Average
5350.010	34.60	8.56	39.19	39.17	43.14	54.00	10.86	Average
5431.440	34.65	8.63	39.18	39.57	43.67	54.00	10.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

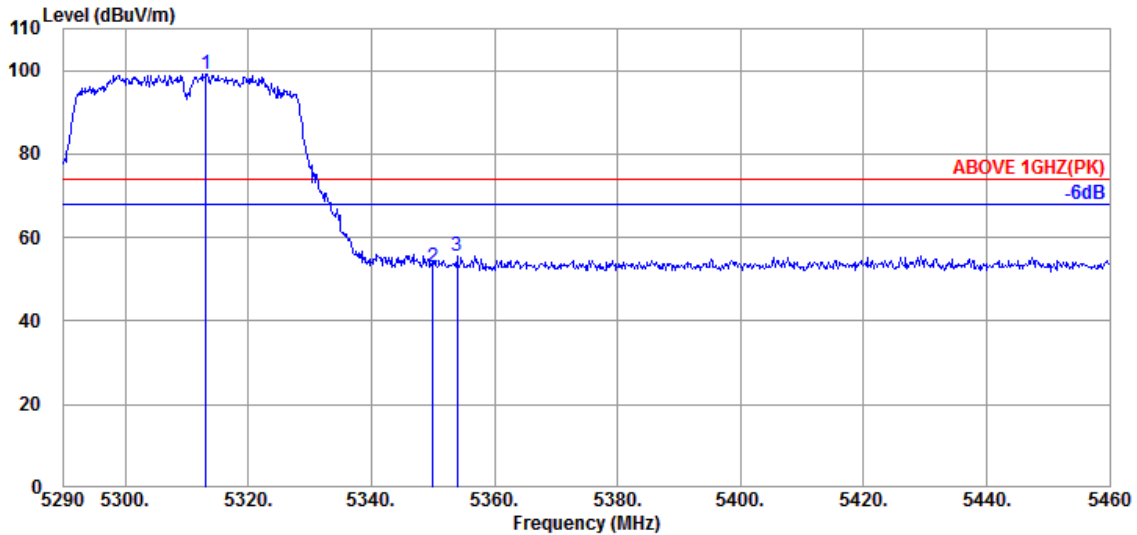

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.120	34.53	8.53	39.19	95.24	99.11	---	---	Peak
5350.010	34.60	8.56	39.19	49.05	53.02	74.00	20.98	Peak
5353.920	34.60	8.56	39.19	51.51	55.48	74.00	18.52	Peak

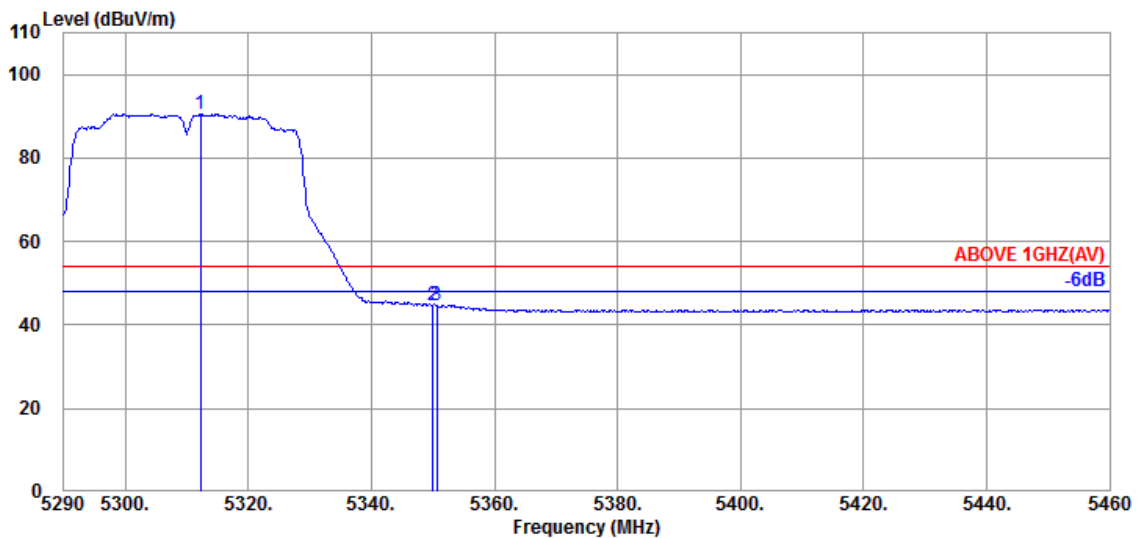


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.270	34.53	8.53	39.19	86.59	90.46	---	---	Average
5350.010	34.60	8.56	39.19	40.73	44.70	54.00	9.30	Average
5350.690	34.60	8.56	39.19	40.75	44.72	54.00	9.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

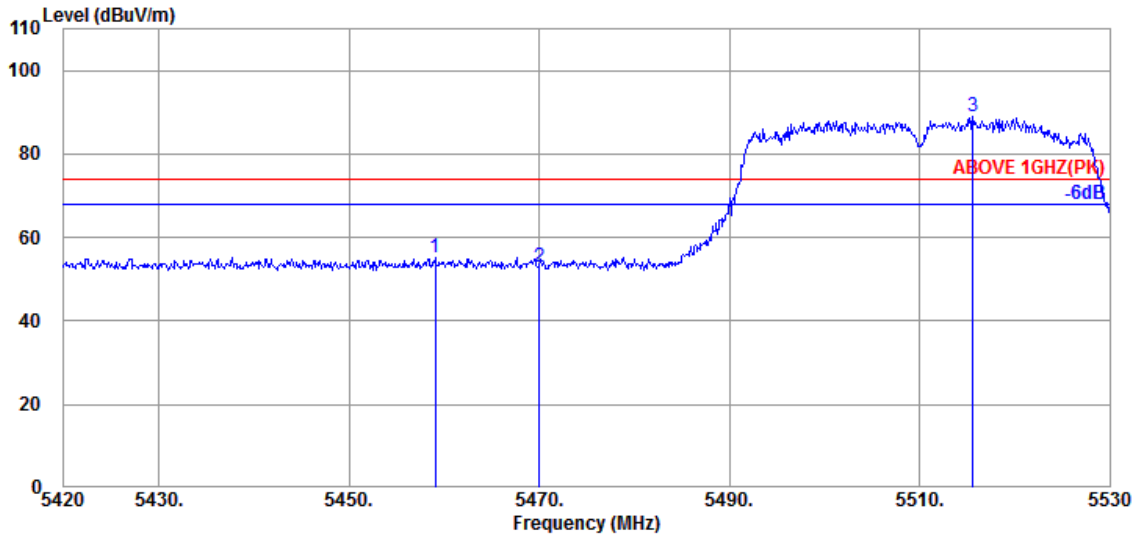

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.050	34.60	8.64	39.17	51.06	55.13	74.00	18.87	Peak
5470.050	34.57	8.65	39.17	48.95	53.00	74.00	21.00	Peak
@ 5515.590	34.53	8.70	39.17	84.74	88.80	---	---	Peak

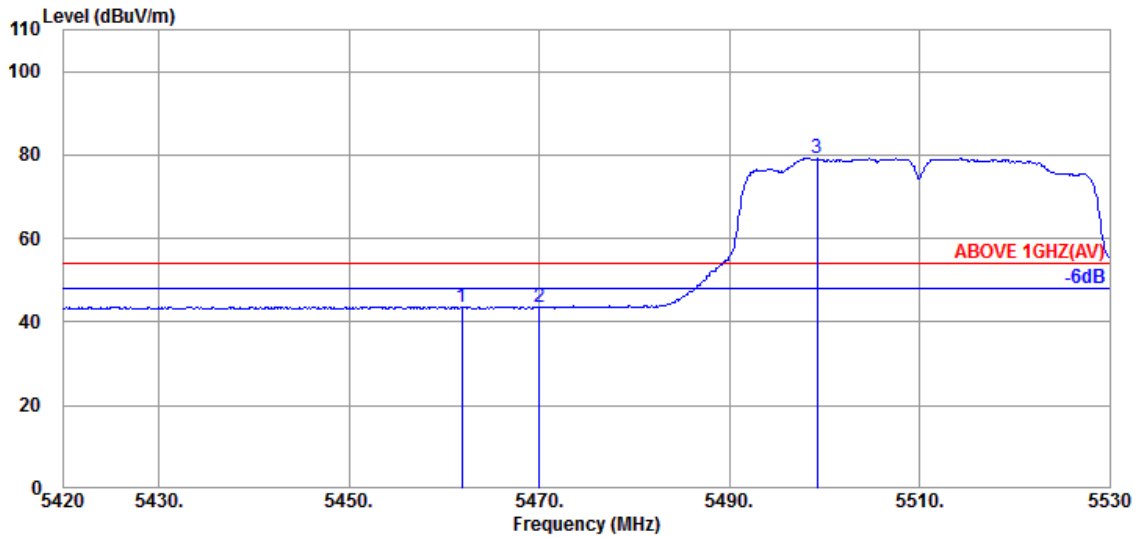


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.910	34.60	8.64	39.17	39.59	43.66	54.00	10.34	Average
5470.050	34.57	8.65	39.17	39.49	43.54	54.00	10.46	Average
@ 5499.200	34.50	8.68	39.17	75.16	79.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

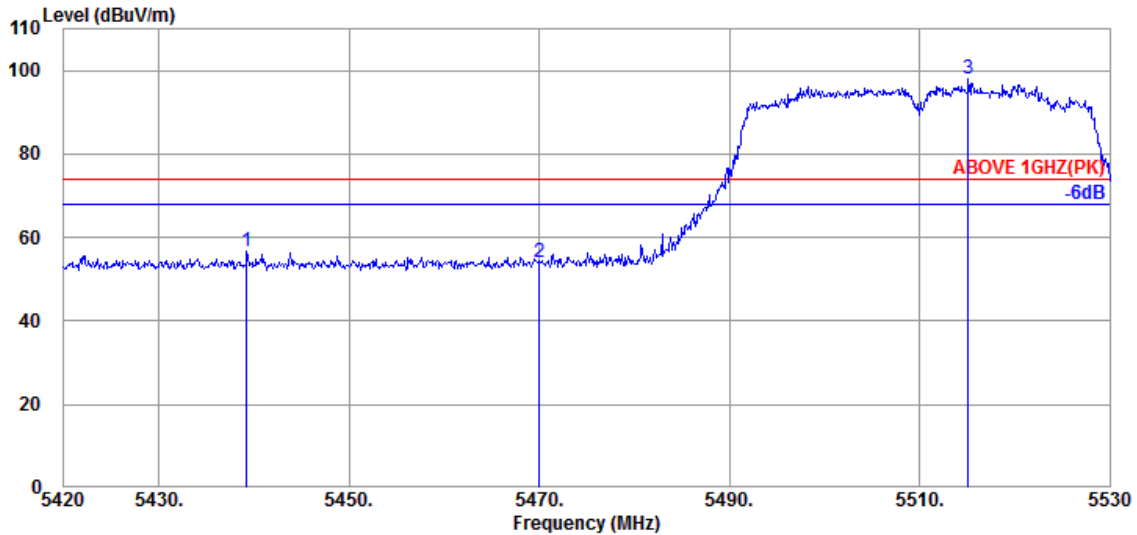

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.250	34.62	8.63	39.18	52.51	56.58	74.00	17.42	Peak
5470.050	34.57	8.65	39.17	50.18	54.23	74.00	19.77	Peak
@ 5515.150	34.53	8.70	39.17	93.84	97.90	---	---	Peak

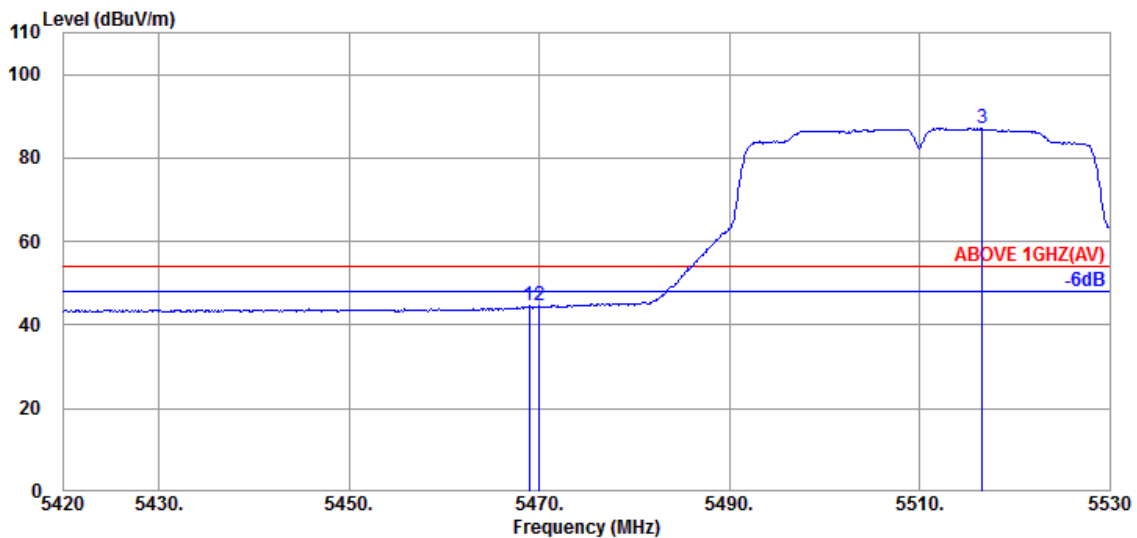


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.57	8.65	39.17	40.50	44.55	54.00	9.45	Average
5470.050	34.57	8.65	39.17	40.51	44.56	54.00	9.44	Average
@ 5516.580	34.53	8.70	39.17	83.09	87.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

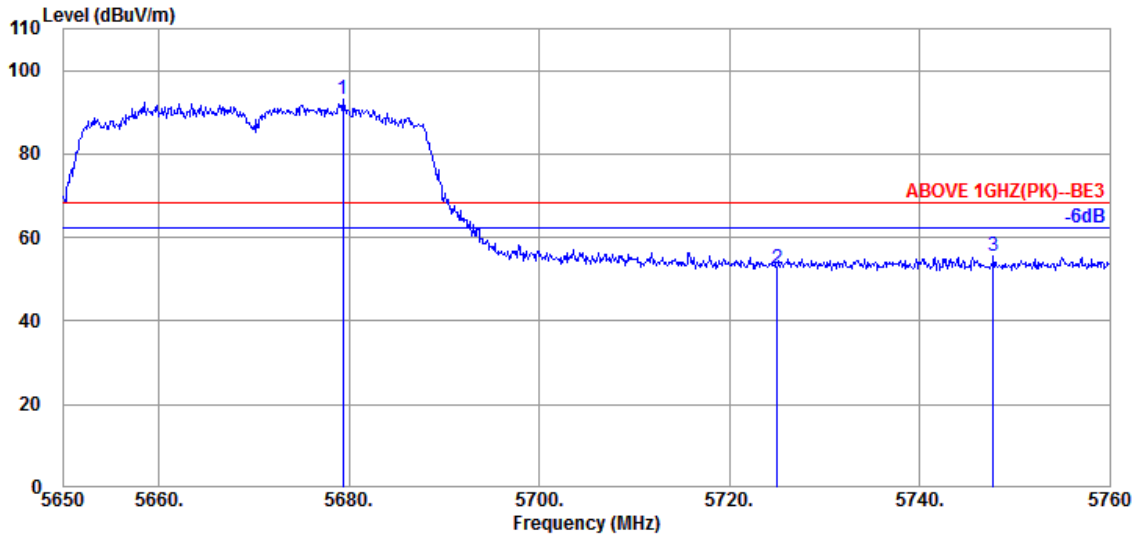

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.370	34.53	8.82	39.22	88.98	93.11	---	---	Peak
5725.020	34.50	8.86	39.23	48.49	52.62	68.20	15.58	Peak
5747.790	34.50	8.88	39.24	51.29	55.43	68.20	12.77	Peak

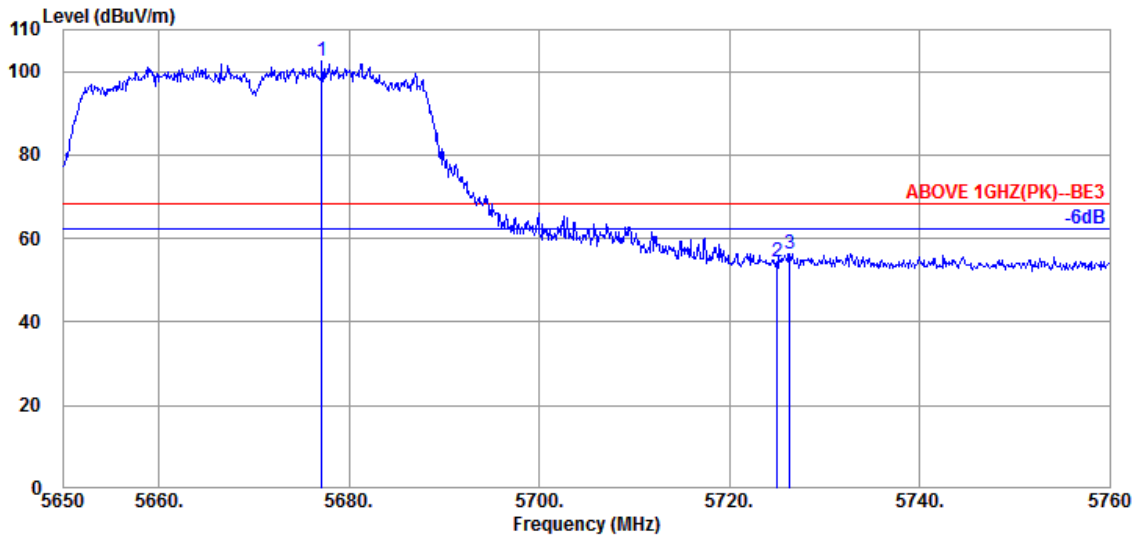


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.170	34.53	8.82	39.22	98.41	102.54	---	---	Peak
5725.020	34.50	8.86	39.23	50.29	54.42	68.20	13.78	Peak
5726.340	34.50	8.86	39.23	52.26	56.39	68.20	11.81	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

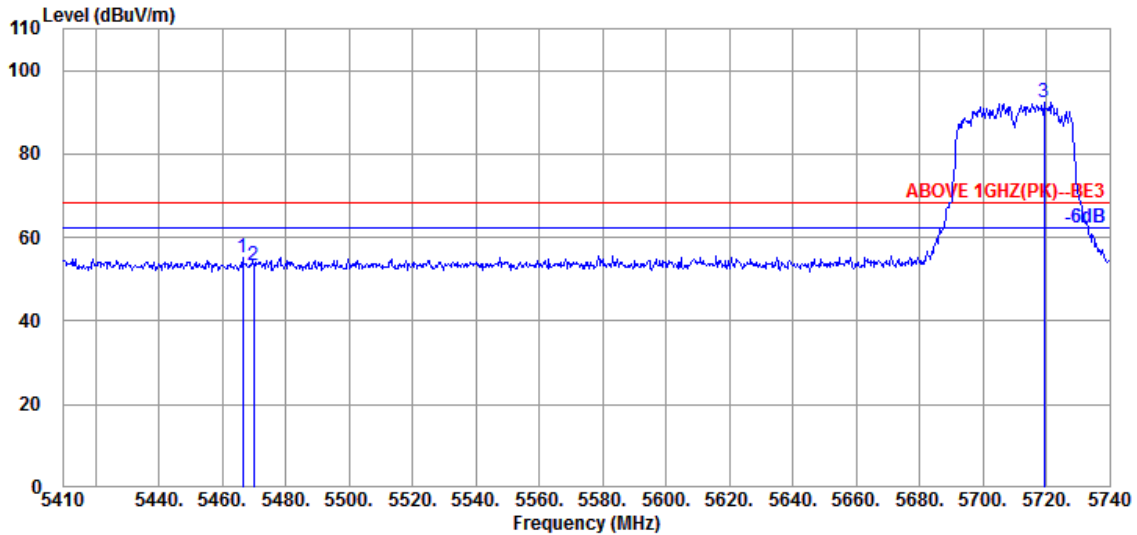

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.57	8.65	39.17	51.00	55.05	68.20	13.15	Peak
5470.060	34.57	8.65	39.17	49.17	53.22	68.20	14.98	Peak
@ 5719.210	34.50	8.86	39.23	88.38	92.51	---	---	Peak

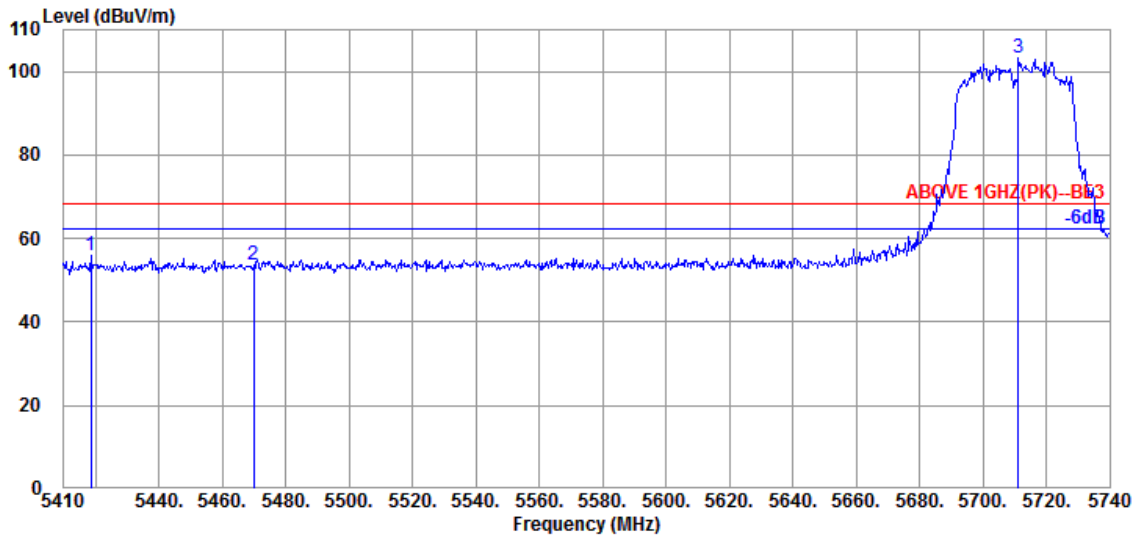


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.580	34.65	8.61	39.18	51.98	56.06	68.20	12.14	Peak
5470.060	34.57	8.65	39.17	49.54	53.59	68.20	14.61	Peak
@ 5711.290	34.50	8.85	39.23	99.17	103.29	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

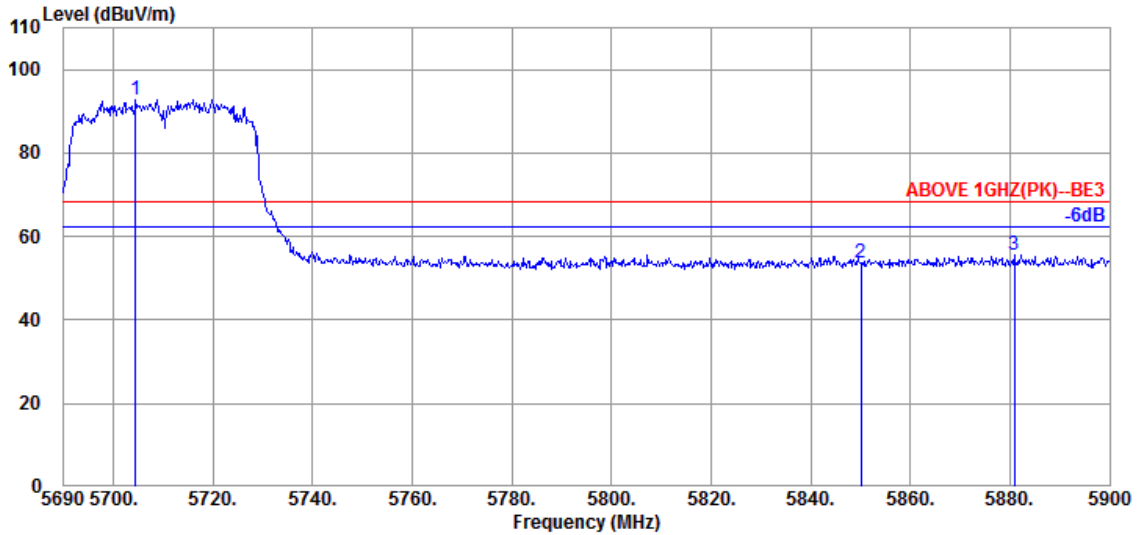

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.490	34.50	8.85	39.22	88.78	92.91	---	---	Peak
5850.020	34.40	8.96	39.26	49.40	53.50	68.20	14.70	Peak
5880.890	34.47	8.99	39.27	51.55	55.74	68.20	12.46	Peak

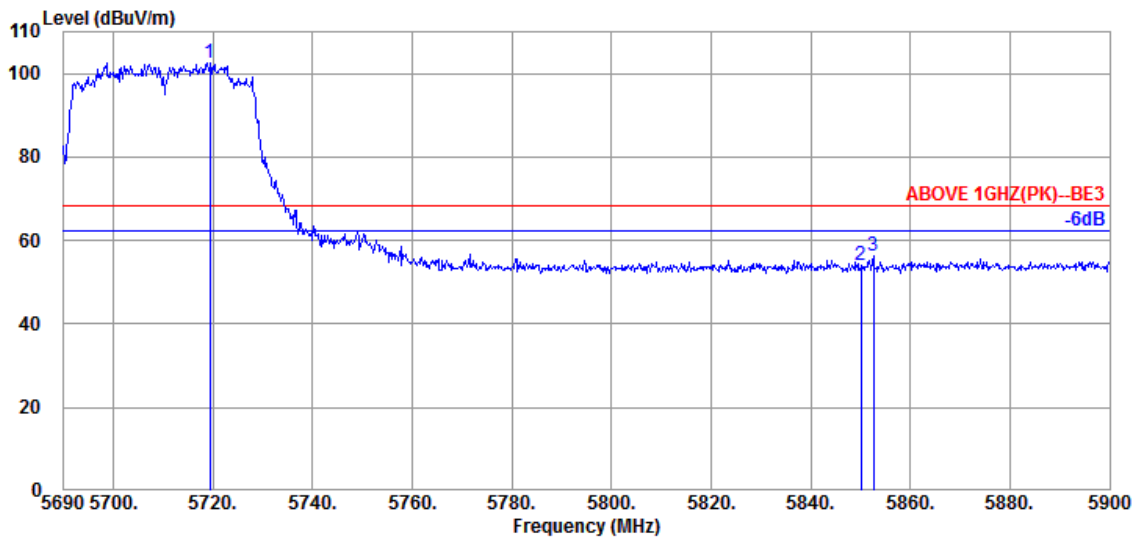


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.400	34.50	8.86	39.23	98.46	102.59	---	---	Peak
5850.020	34.40	8.96	39.26	49.77	53.87	68.20	14.33	Peak
5852.540	34.40	8.96	39.26	52.19	56.29	68.20	11.91	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5755MHz

### Antenna at Horizontal Polarization

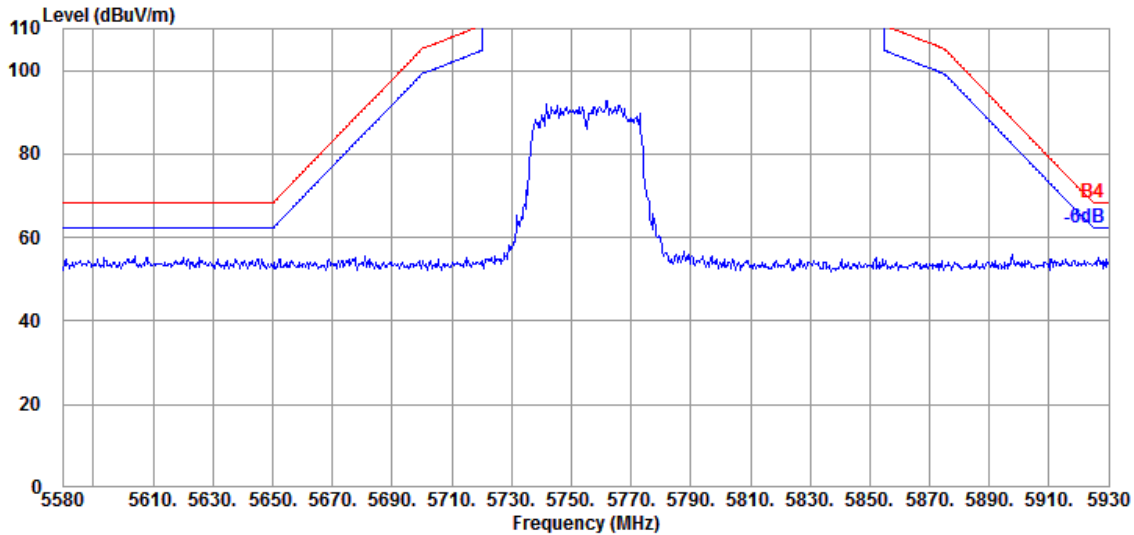


### Antenna at Vertical Polarization

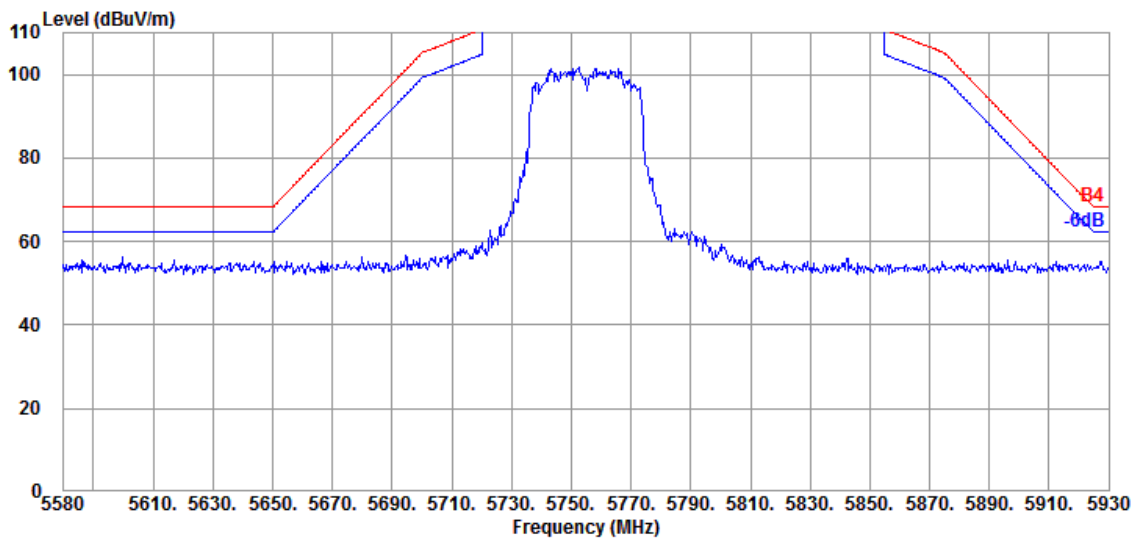


Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

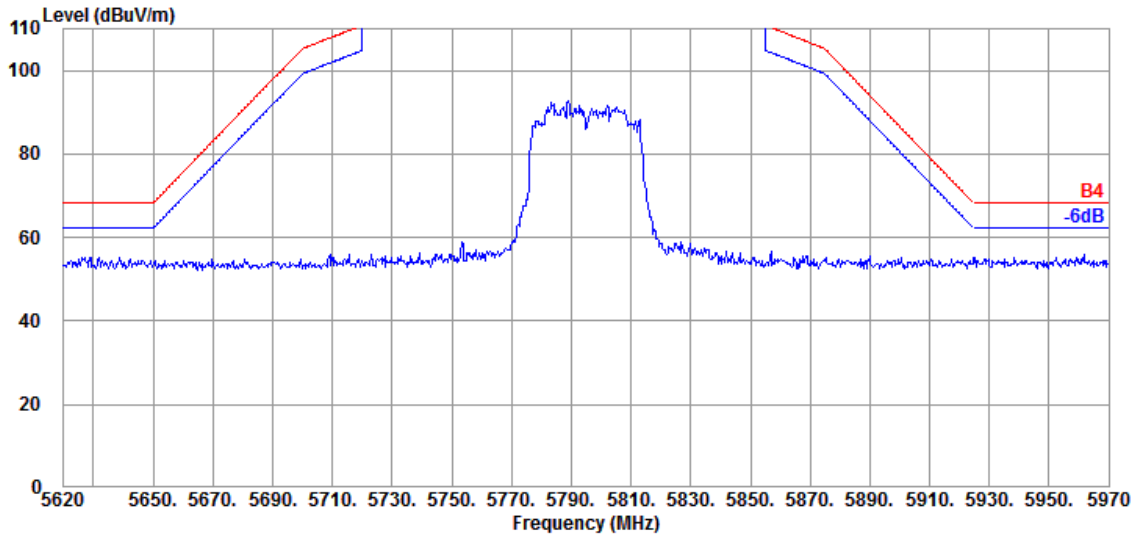

Antenna at Vertical Polarization

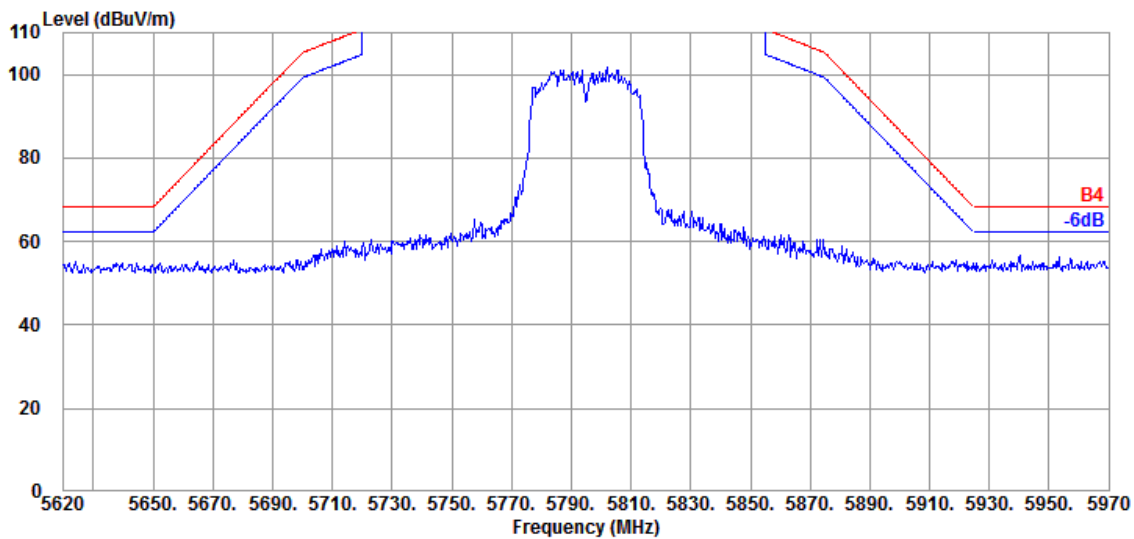


Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

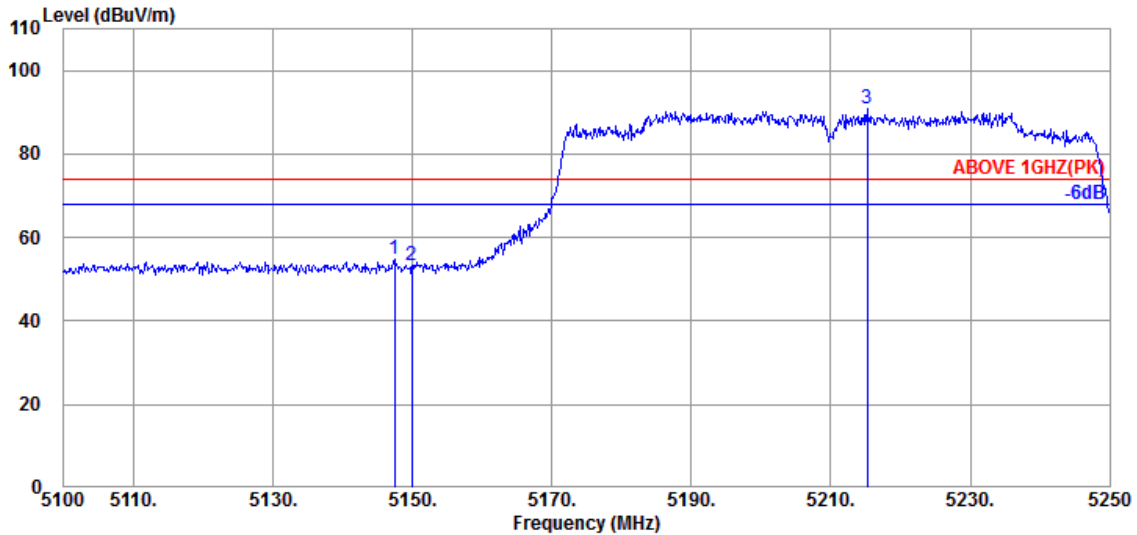

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	34.10	8.39	39.21	51.61	54.89	74.00	19.11	Peak
5149.950	34.10	8.39	39.21	49.98	53.26	74.00	20.74	Peak
@ 5215.200	34.35	8.44	39.20	87.24	90.83	---	---	Peak

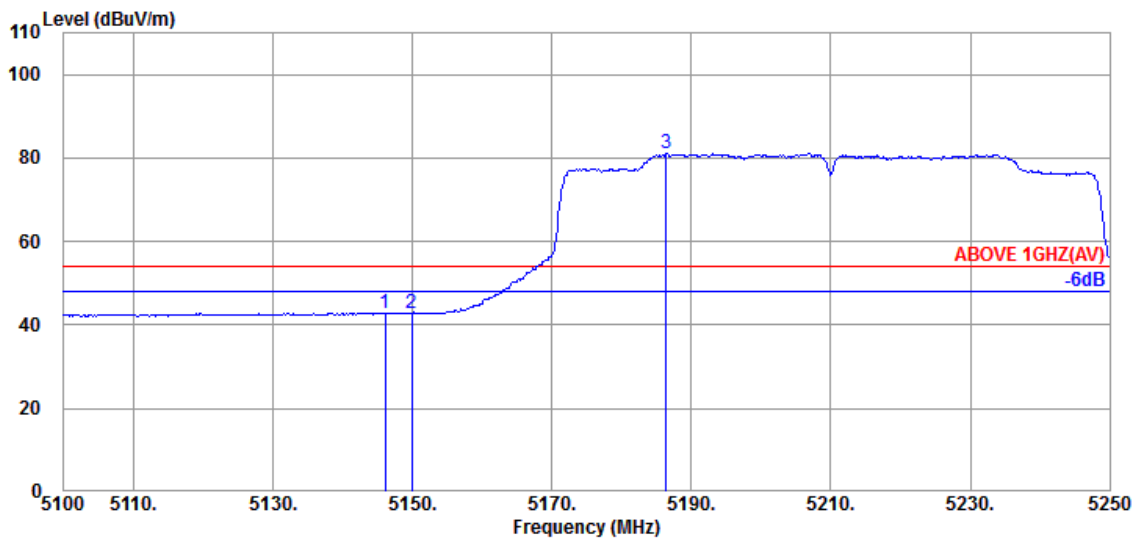


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.050	34.10	8.39	39.21	39.65	42.93	54.00	11.07	Average
5149.950	34.10	8.39	39.21	39.51	42.79	54.00	11.21	Average
@ 5186.400	34.23	8.41	39.21	77.74	81.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

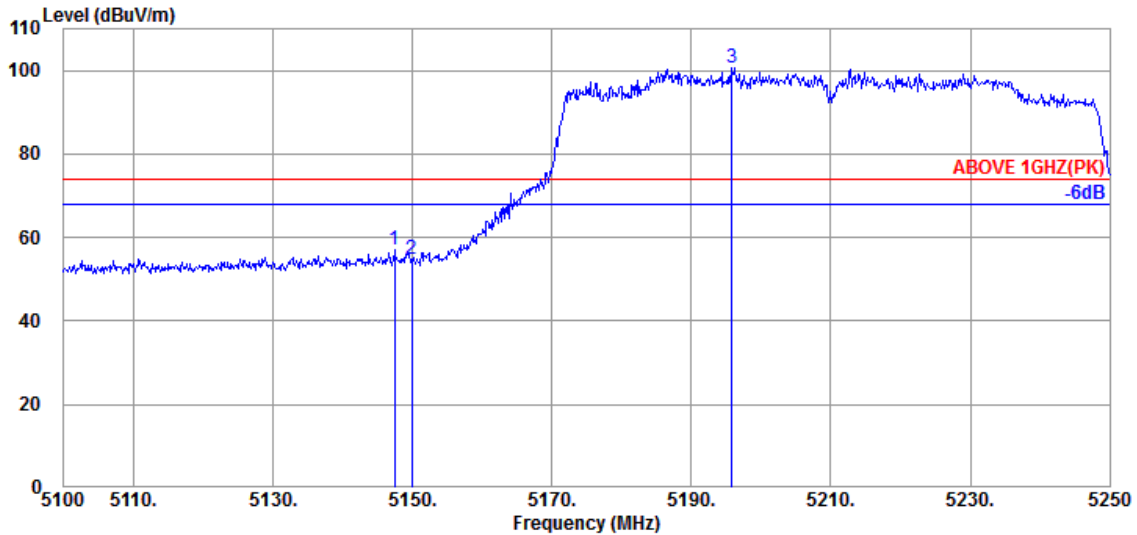

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	34.10	8.39	39.21	53.60	56.88	74.00	17.12	Peak
5149.950	34.10	8.39	39.21	51.59	54.87	74.00	19.13	Peak
@ 5195.850	34.30	8.43	39.21	97.09	100.61	---	---	Peak

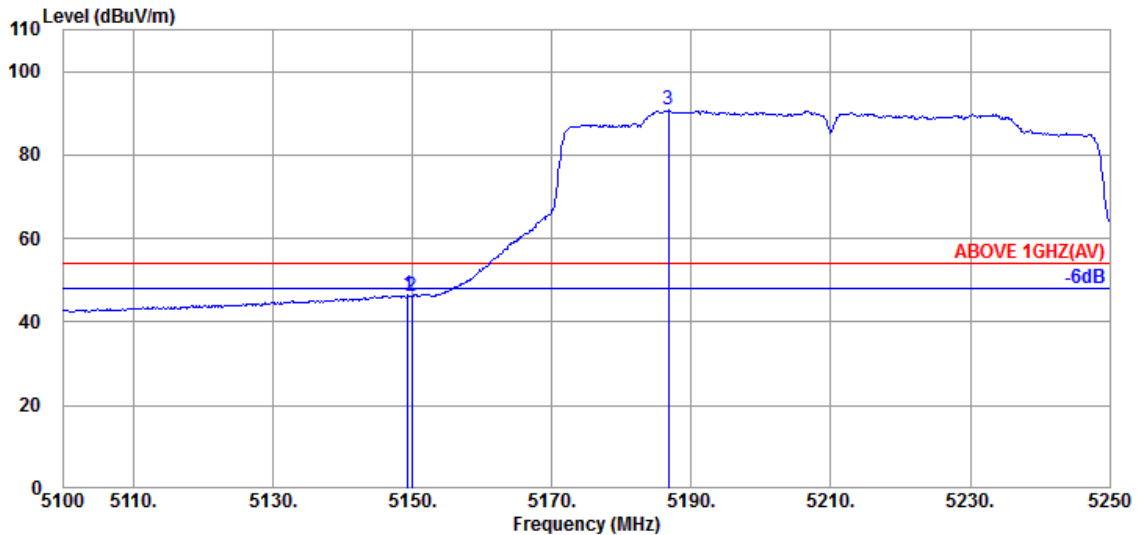


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.10	8.39	39.21	43.10	46.38	54.00	7.62	Average
5149.950	34.10	8.39	39.21	42.78	46.06	54.00	7.94	Average
@ 5186.700	34.30	8.41	39.21	87.34	90.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

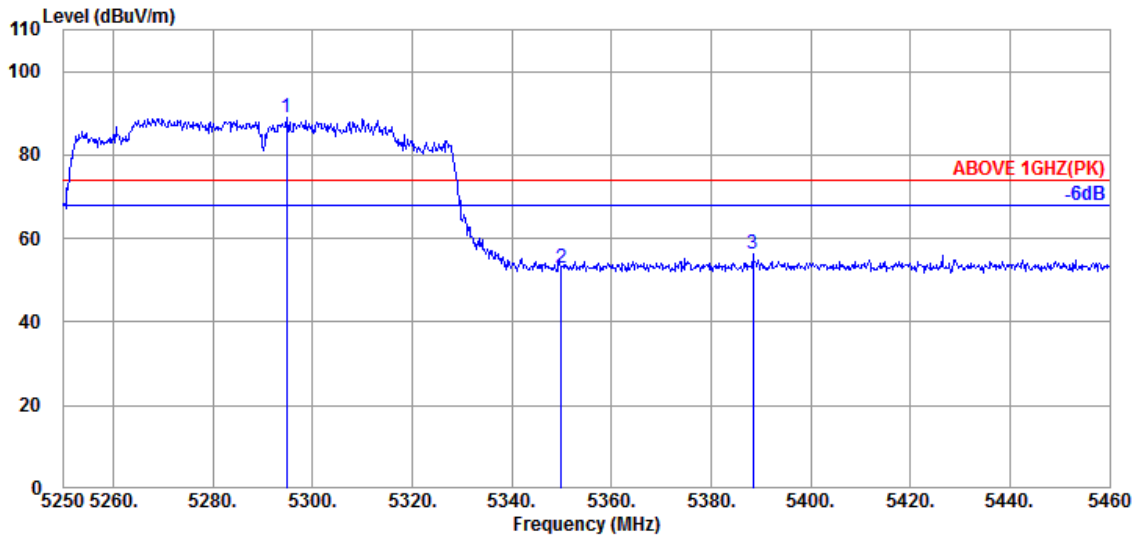

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.730	34.50	8.51	39.19	85.33	89.15	---	---	Peak
5349.960	34.60	8.56	39.19	48.78	52.75	74.00	21.25	Peak
5388.390	34.70	8.58	39.18	52.05	56.15	74.00	17.85	Peak

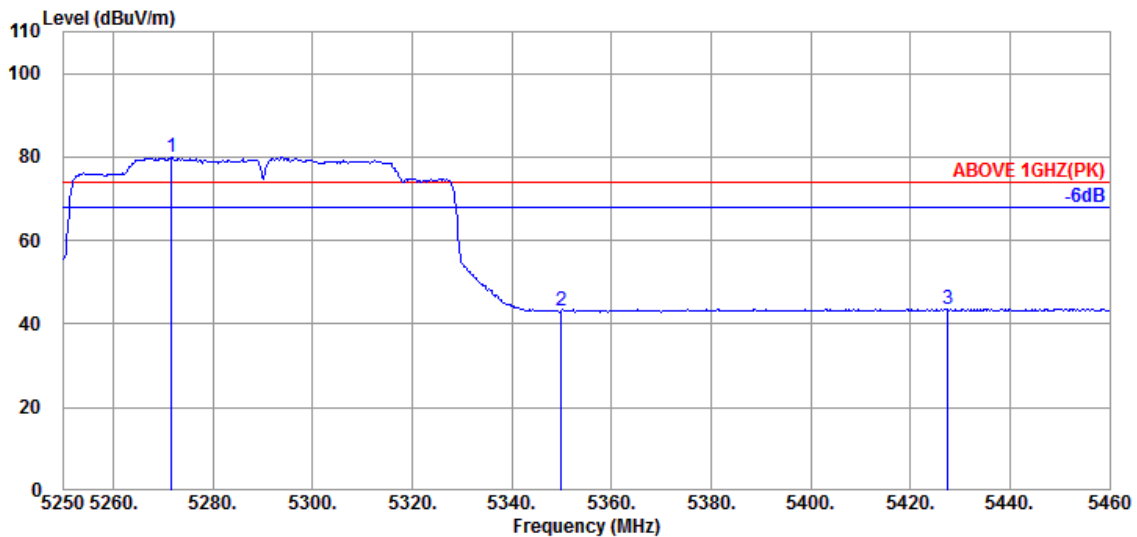


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5271.630	34.50	8.49	39.20	76.05	79.84	---	---	Average
5349.960	34.60	8.56	39.19	39.16	43.13	54.00	10.87	Average
5427.450	34.65	8.61	39.18	39.59	43.67	54.00	10.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

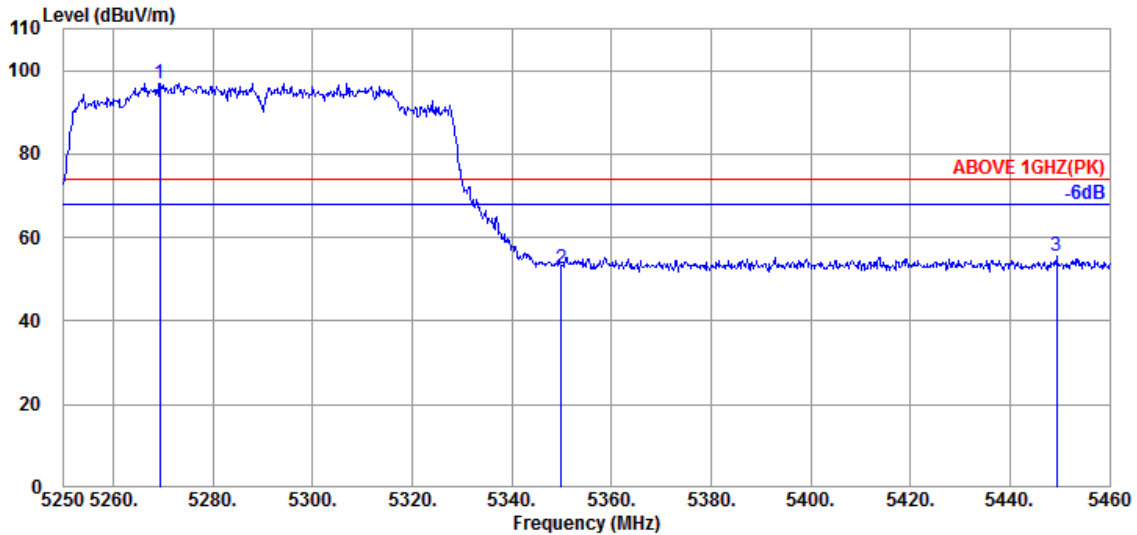

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.320	34.50	8.49	39.20	93.25	97.04	---	---	Peak
5349.960	34.60	8.56	39.19	48.73	52.70	74.00	21.30	Peak
5449.290	34.60	8.64	39.18	51.51	55.57	74.00	18.43	Peak

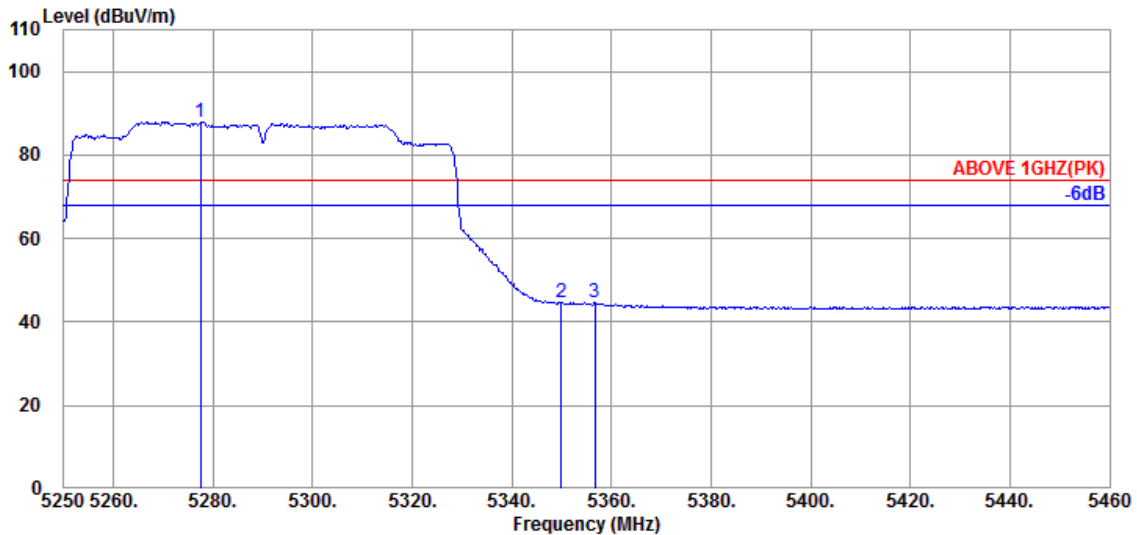


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.510	34.50	8.50	39.19	84.03	87.84	---	---	Average
5349.960	34.60	8.56	39.19	40.59	44.56	54.00	9.44	Average
5356.680	34.63	8.56	39.19	40.57	44.57	54.00	9.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

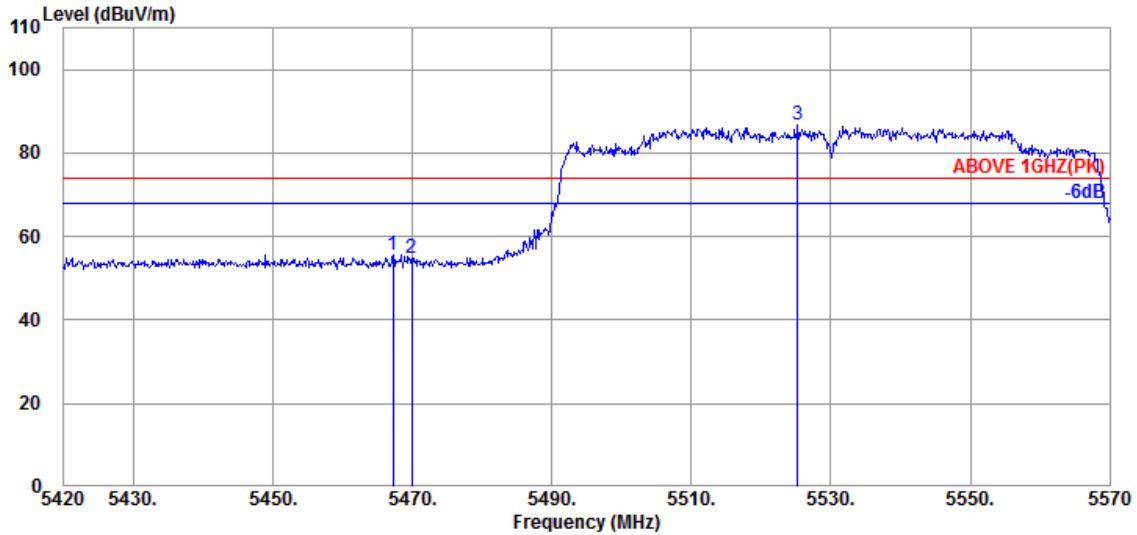

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.57	8.65	39.17	51.37	55.42	74.00	18.58	Peak
5469.950	34.57	8.65	39.17	50.61	54.66	74.00	19.34	Peak
@ 5525.300	34.53	8.70	39.18	82.50	86.55	---	---	Peak

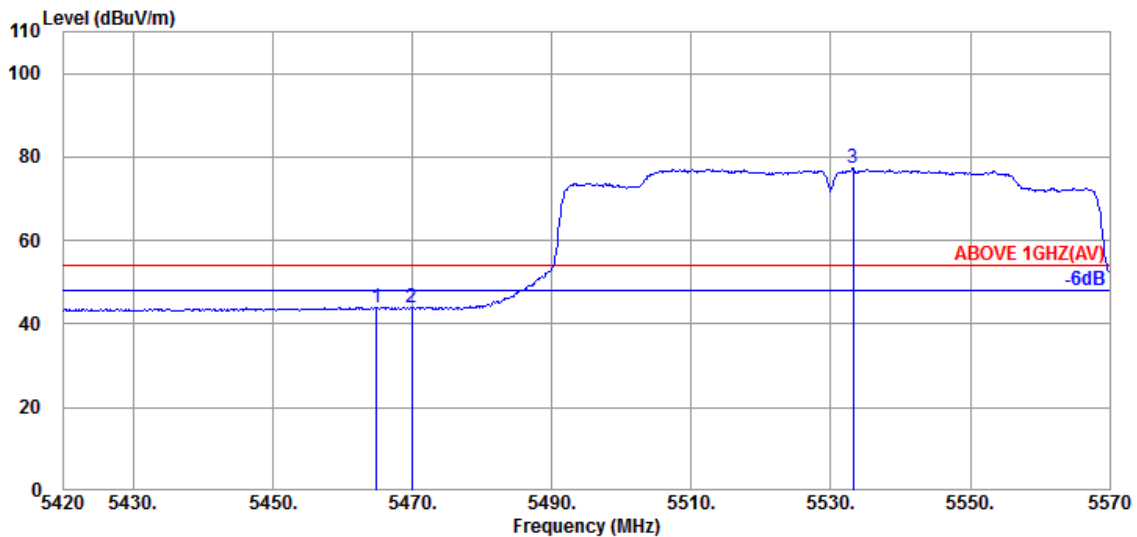


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.850	34.57	8.65	39.17	40.06	44.11	54.00	9.89	Average
5469.950	34.57	8.65	39.17	39.97	44.02	54.00	9.98	Average
@ 5533.250	34.57	8.71	39.18	73.26	77.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

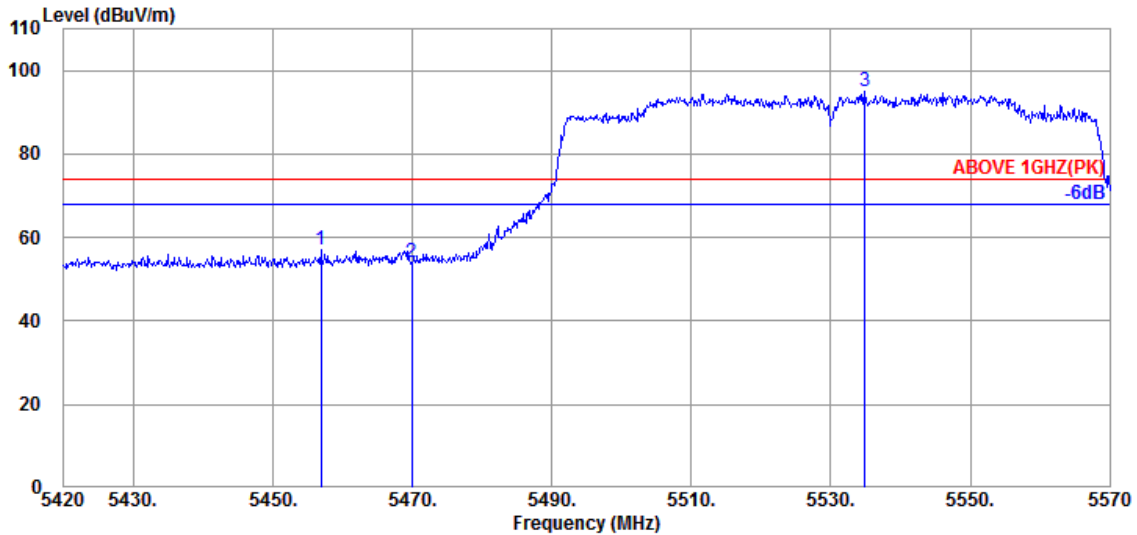

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.900	34.60	8.64	39.17	52.98	57.05	74.00	16.95	Peak
5469.950	34.57	8.65	39.17	49.92	53.97	74.00	20.03	Peak
@ 5534.900	34.57	8.71	39.18	90.99	95.09	---	---	Peak

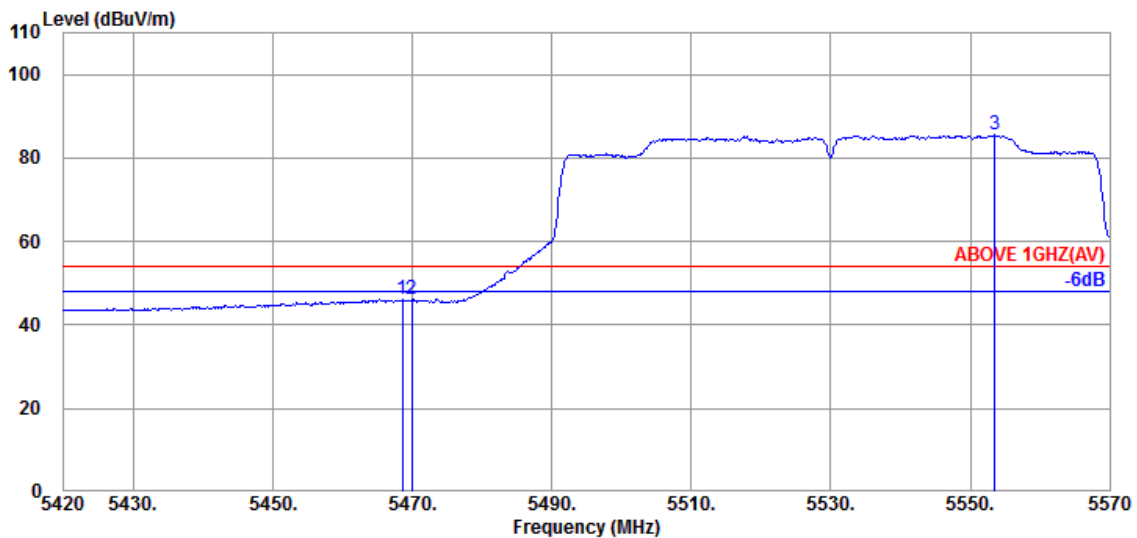


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.57	8.65	39.17	42.07	46.12	54.00	7.88	Average
5469.950	34.57	8.65	39.17	41.97	46.02	54.00	7.98	Average
@ 5553.500	34.60	8.72	39.18	81.27	85.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5610MHz

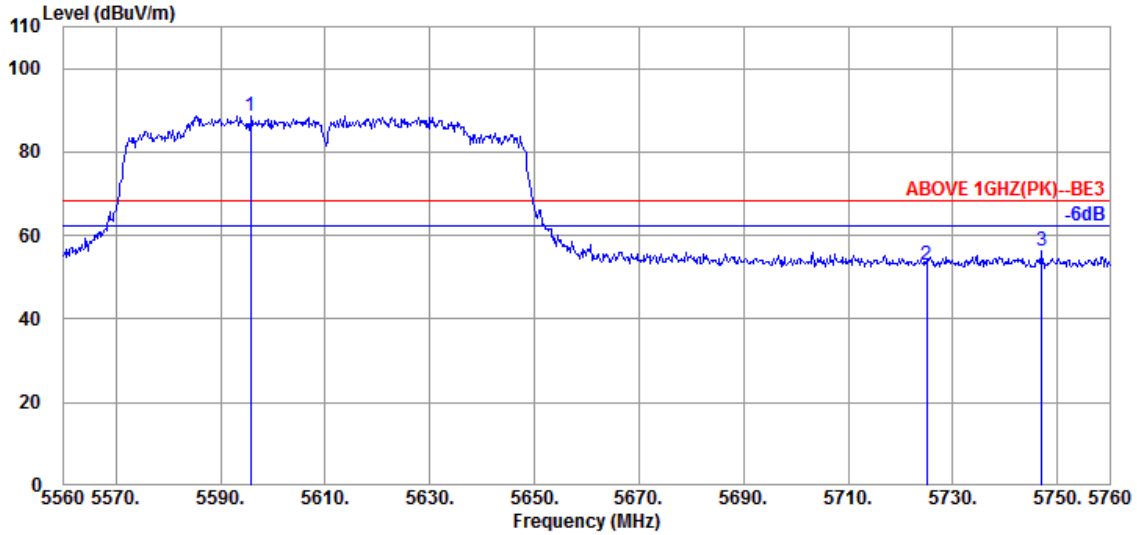

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.800	34.60	8.75	39.19	84.60	88.76	---	---	Peak
5725.000	34.50	8.86	39.23	48.94	53.07	68.20	15.13	Peak
5747.000	34.50	8.88	39.24	52.09	56.23	68.20	11.97	Peak

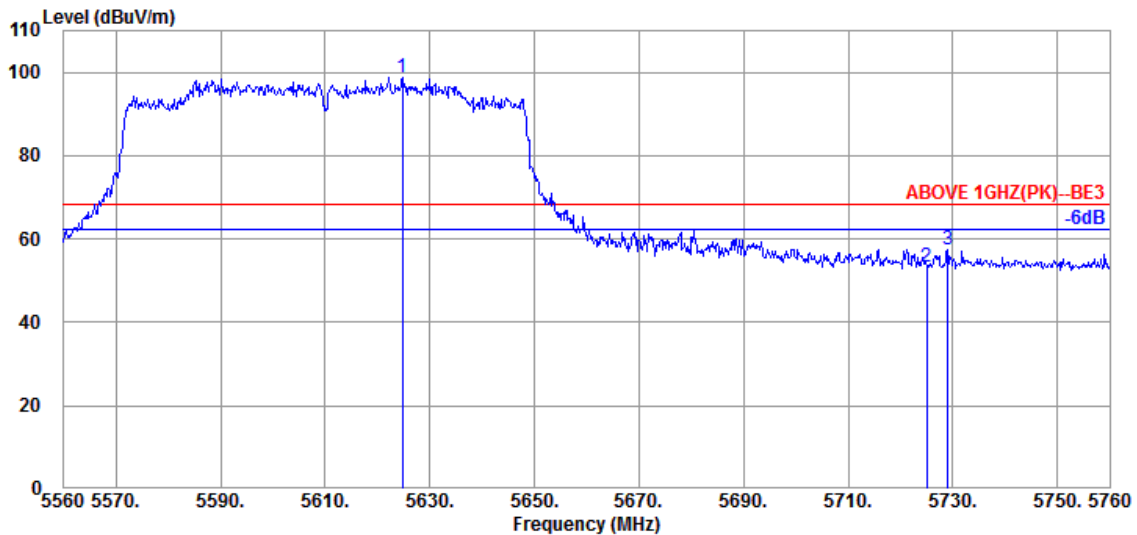


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.800	34.60	8.78	39.20	94.58	98.76	---	---	Peak
5725.000	34.50	8.86	39.23	49.16	53.29	68.20	14.91	Peak
5729.000	34.50	8.86	39.23	53.16	57.29	68.20	10.91	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

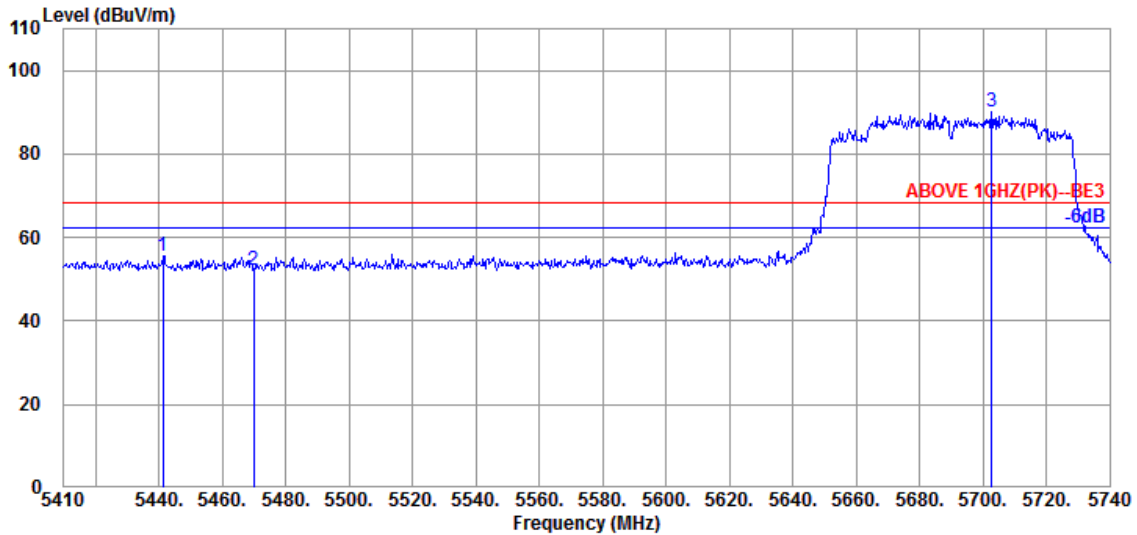

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.350	34.62	8.63	39.18	51.51	55.58	68.20	12.62	Peak
5470.060	34.57	8.65	39.17	48.16	52.21	68.20	15.99	Peak
@ 5702.710	34.50	8.85	39.22	86.13	90.26	---	---	Peak

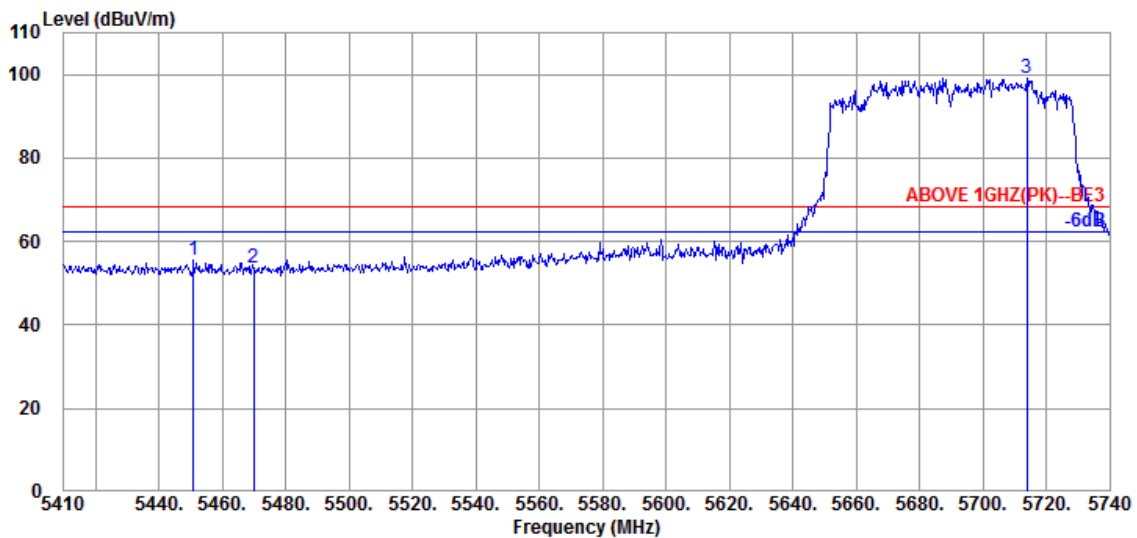


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.920	34.60	8.64	39.18	51.58	55.64	68.20	12.56	Peak
5470.060	34.57	8.65	39.17	49.48	53.53	68.20	14.67	Peak
@ 5713.930	34.50	8.85	39.23	95.07	99.19	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

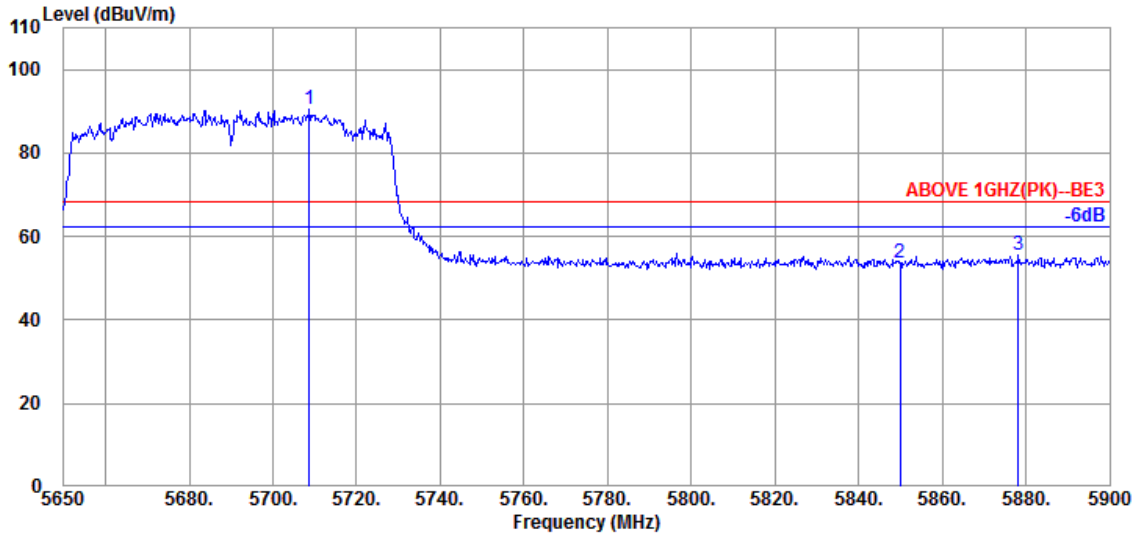

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.750	34.50	8.85	39.23	86.34	90.46	---	---	Peak
5850.000	34.40	8.96	39.26	49.44	53.54	68.20	14.66	Peak
5878.250	34.47	8.99	39.27	51.25	55.44	68.20	12.76	Peak

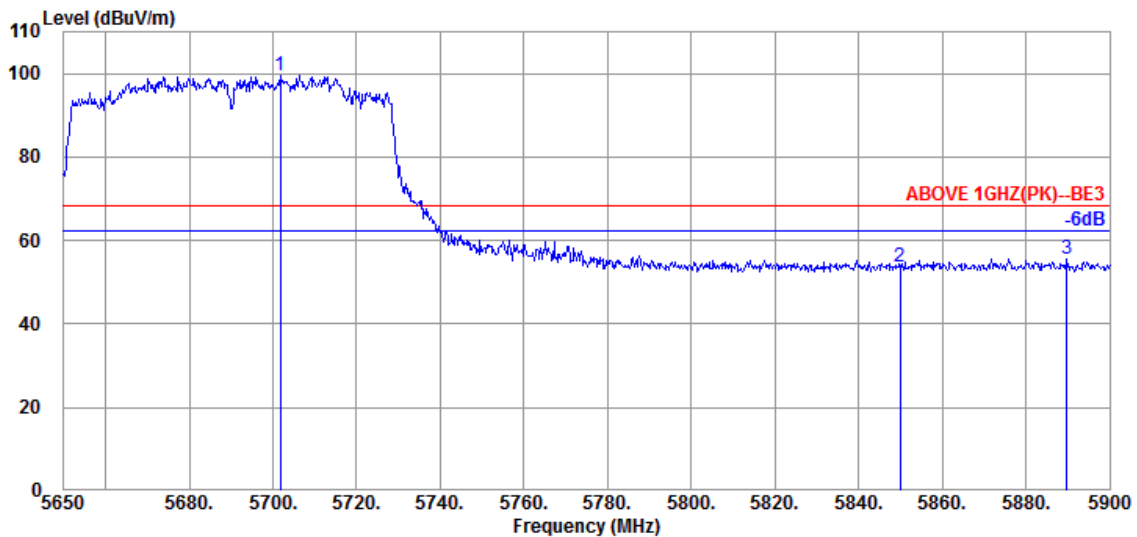

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.750	34.50	8.85	39.22	95.32	99.45	---	---	Peak
5850.000	34.40	8.96	39.26	49.44	53.54	68.20	14.66	Peak
5889.750	34.47	9.01	39.27	51.42	55.63	68.20	12.57	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

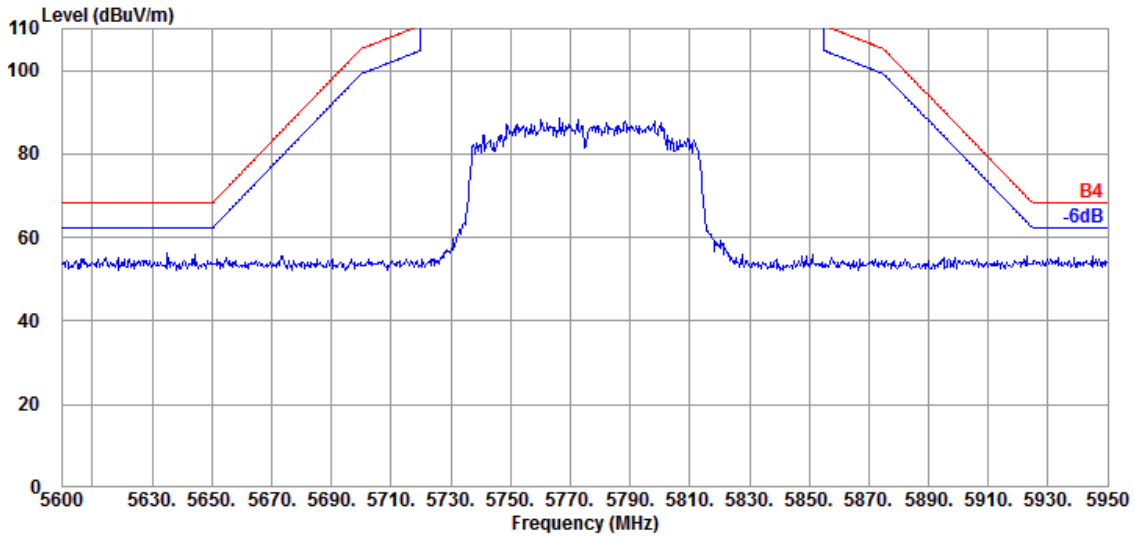

Antenna at Vertical Polarization

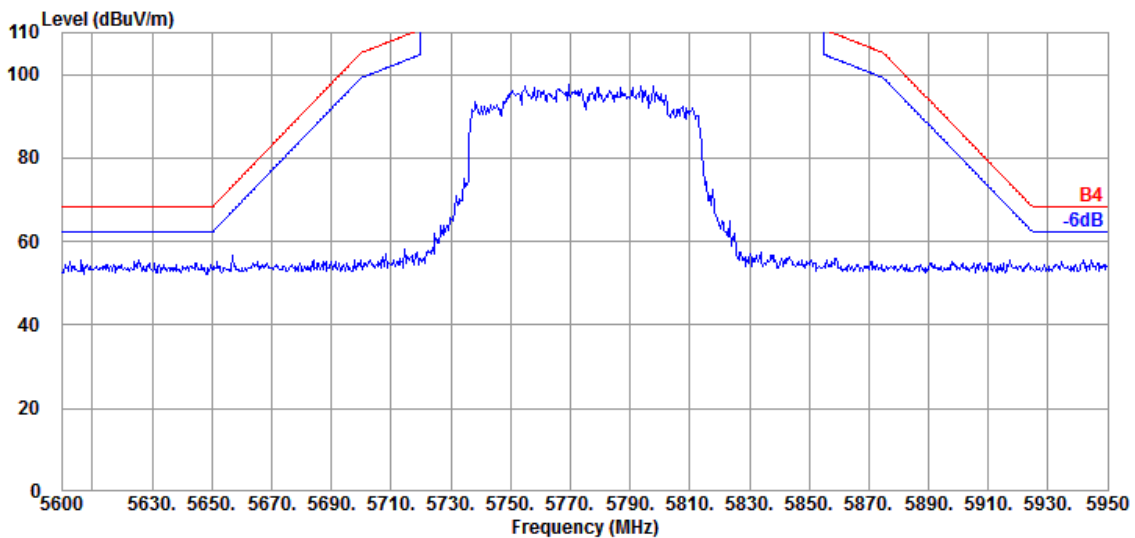


Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

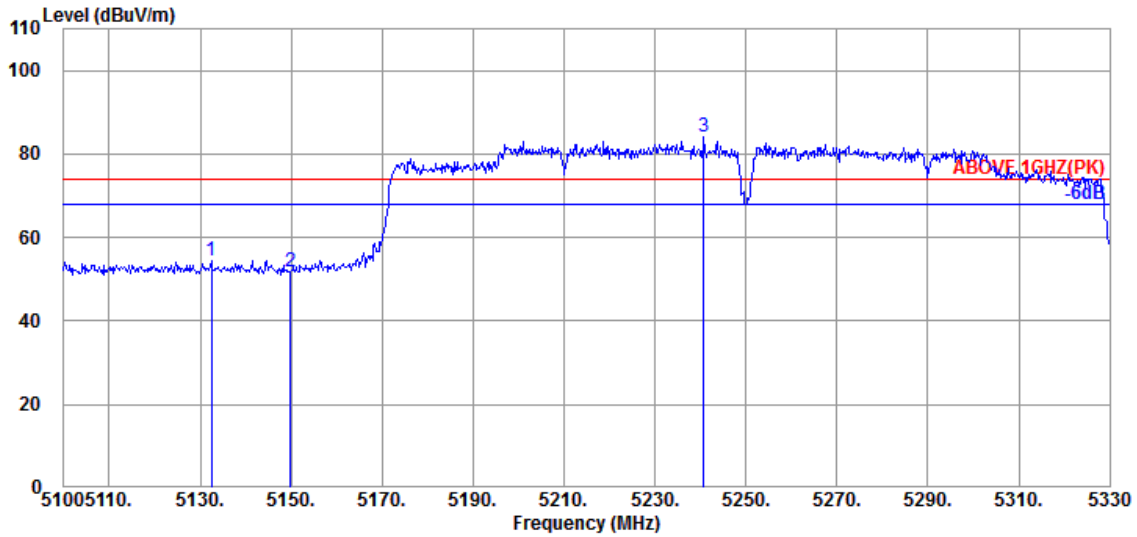

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.430	34.03	8.37	39.21	51.33	54.52	74.00	19.48	Peak
5149.910	34.10	8.39	39.21	48.46	51.74	74.00	22.26	Peak
@ 5240.760	34.45	8.46	39.20	80.31	84.02	---	---	Peak

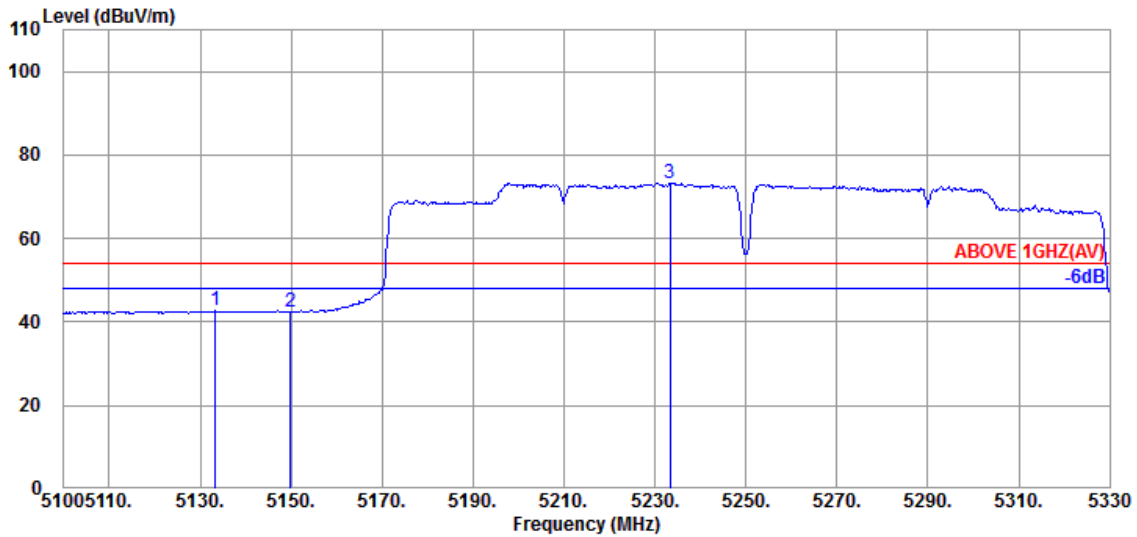


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.350	34.03	8.37	39.21	39.55	42.74	54.00	11.26	Average
5149.910	34.10	8.39	39.21	39.14	42.42	54.00	11.58	Average
@ 5233.400	34.45	8.46	39.20	69.65	73.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

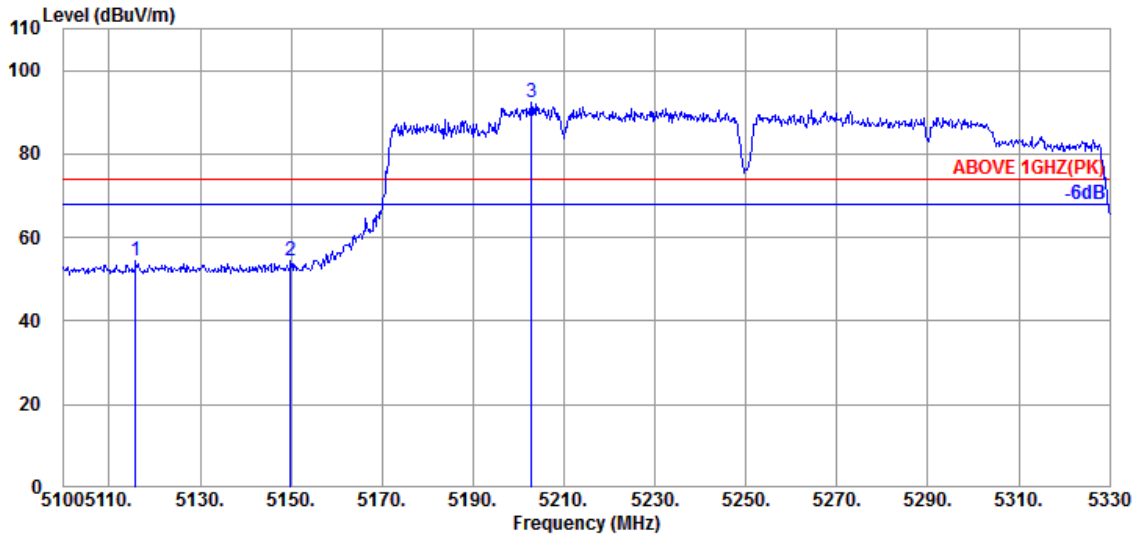

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.870	33.97	8.36	39.22	51.16	54.27	74.00	19.73	Peak
5149.910	34.10	8.39	39.21	51.13	54.41	74.00	19.59	Peak
@ 5202.810	34.35	8.43	39.21	88.77	92.34	---	---	Peak

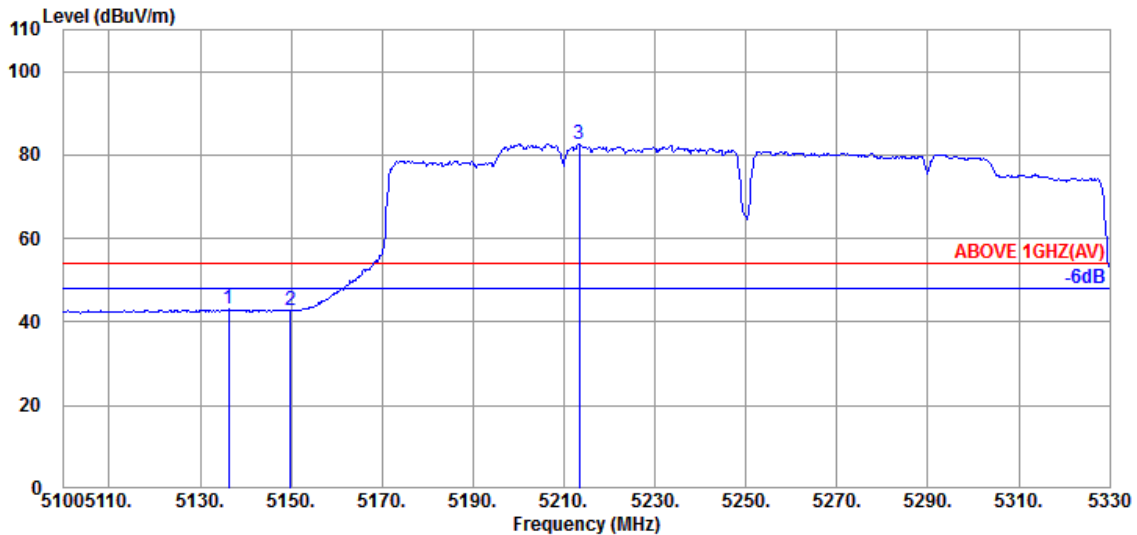


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.340	34.03	8.37	39.21	39.88	43.07	54.00	10.93	Average
5149.910	34.10	8.39	39.21	39.41	42.69	54.00	11.31	Average
@ 5213.390	34.35	8.44	39.20	78.97	82.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

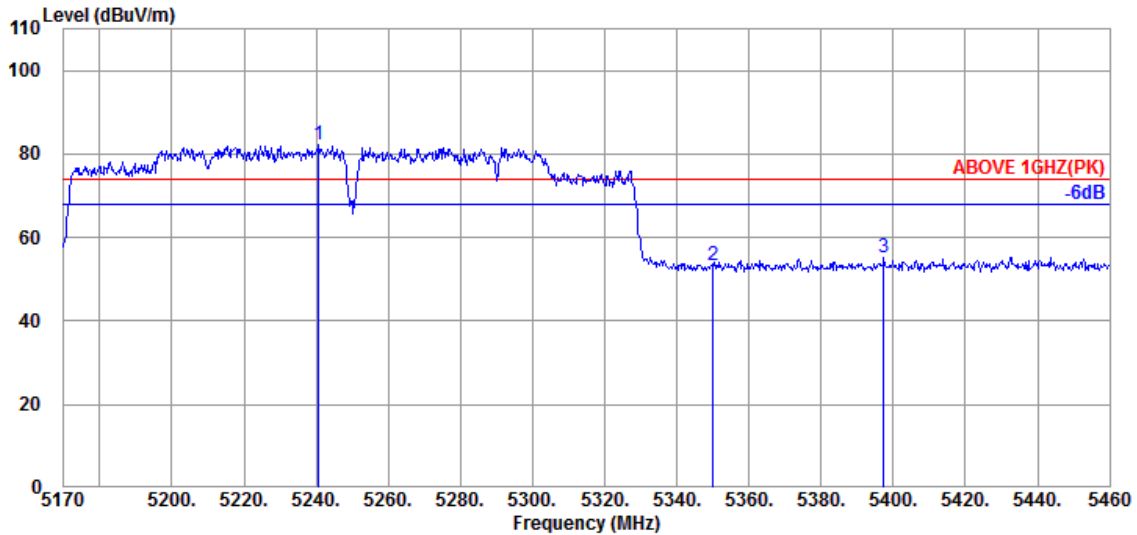

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5240.760	34.45	8.46	39.20	78.66	82.37	---	---	Peak
5350.090	34.60	8.56	39.19	49.38	53.35	74.00	20.65	Peak
5397.360	34.70	8.60	39.18	51.15	55.27	74.00	18.73	Peak

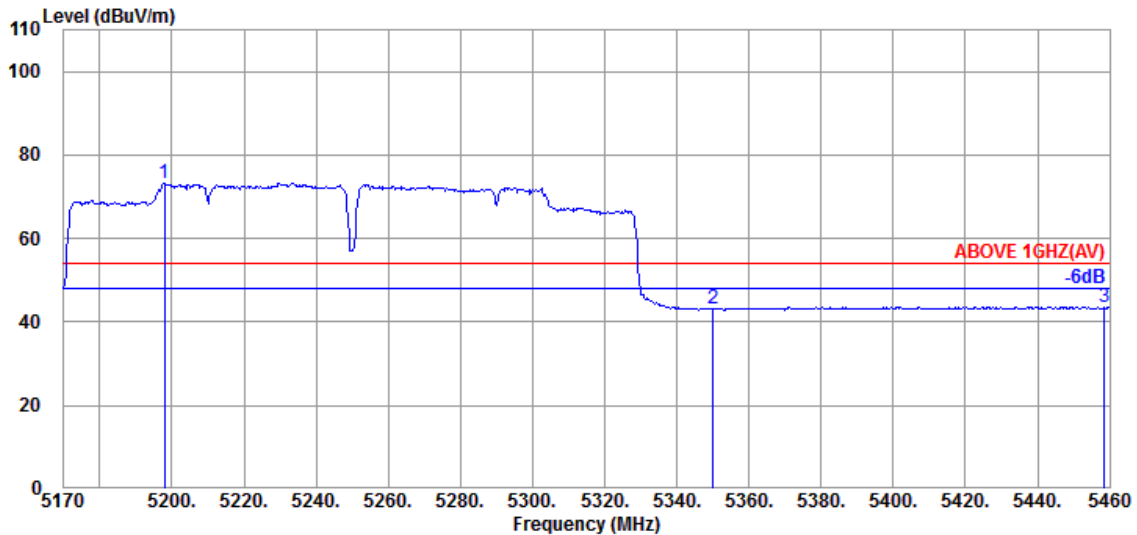


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	34.30	8.43	39.21	69.76	73.28	---	---	Average
5350.090	34.60	8.56	39.19	39.05	43.02	54.00	10.98	Average
5458.550	34.60	8.64	39.17	39.54	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

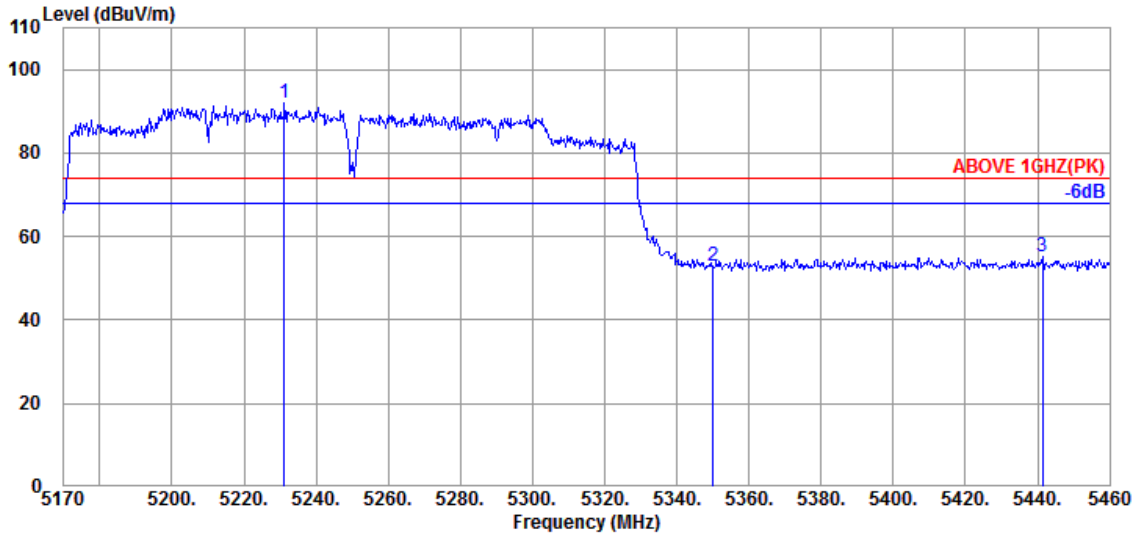

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.190	34.40	8.46	39.20	88.45	92.11	---	---	Peak
5350.090	34.60	8.56	39.19	48.94	52.91	74.00	21.09	Peak
5441.440	34.62	8.63	39.18	50.99	55.06	74.00	18.94	Peak

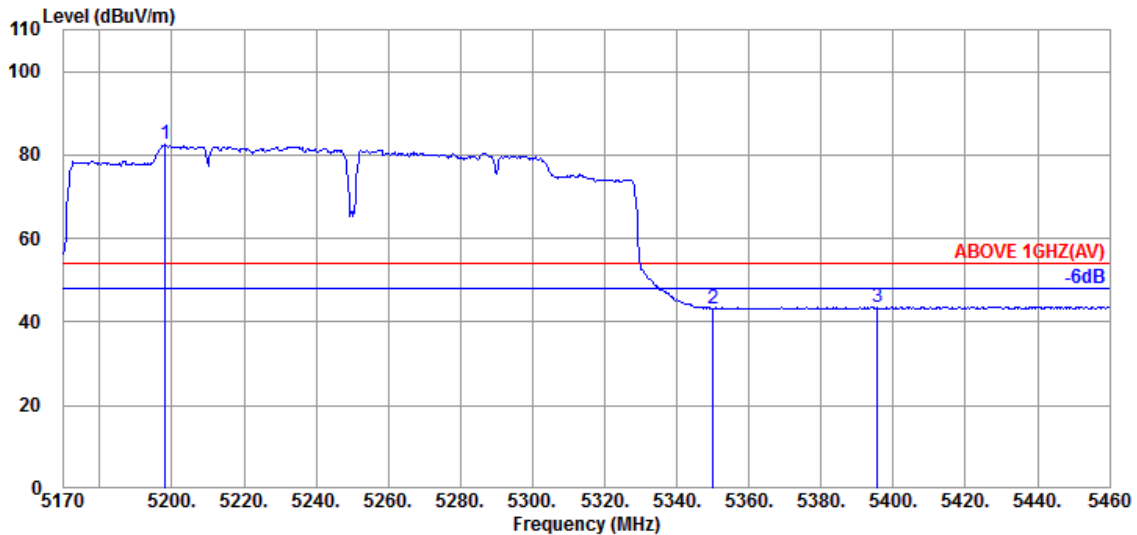


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5198.130	34.30	8.43	39.21	79.19	82.71	---	---	Average
5350.090	34.60	8.56	39.19	39.17	43.14	54.00	10.86	Average
5395.620	34.70	8.60	39.18	39.58	43.70	54.00	10.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

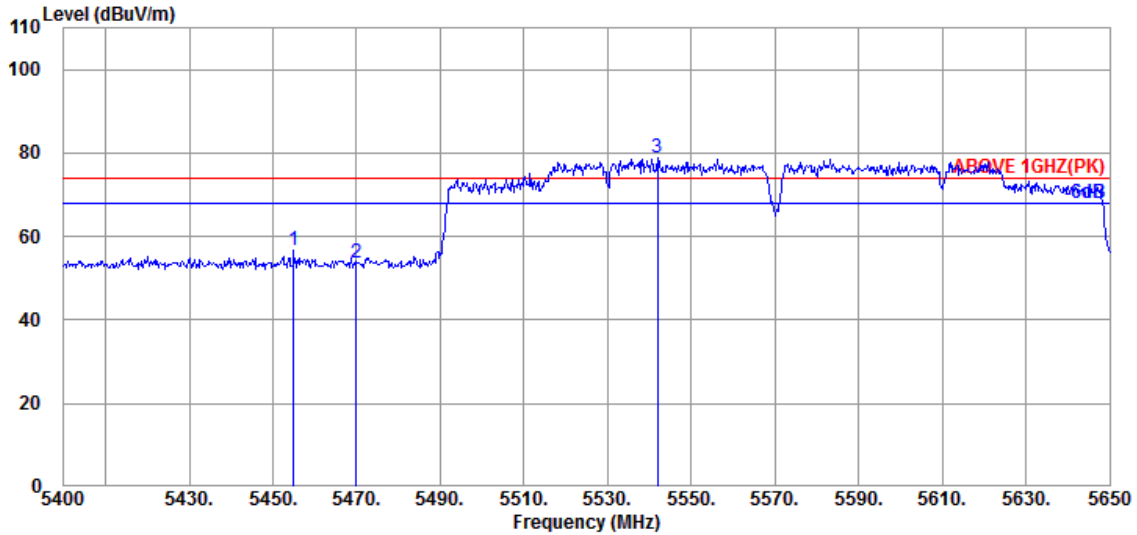

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.000	34.60	8.64	39.17	52.47	56.54	74.00	17.46	Peak
5470.000	34.57	8.65	39.17	49.70	53.75	74.00	20.25	Peak
@ 5542.000	34.57	8.71	39.18	74.77	78.87	---	---	Peak

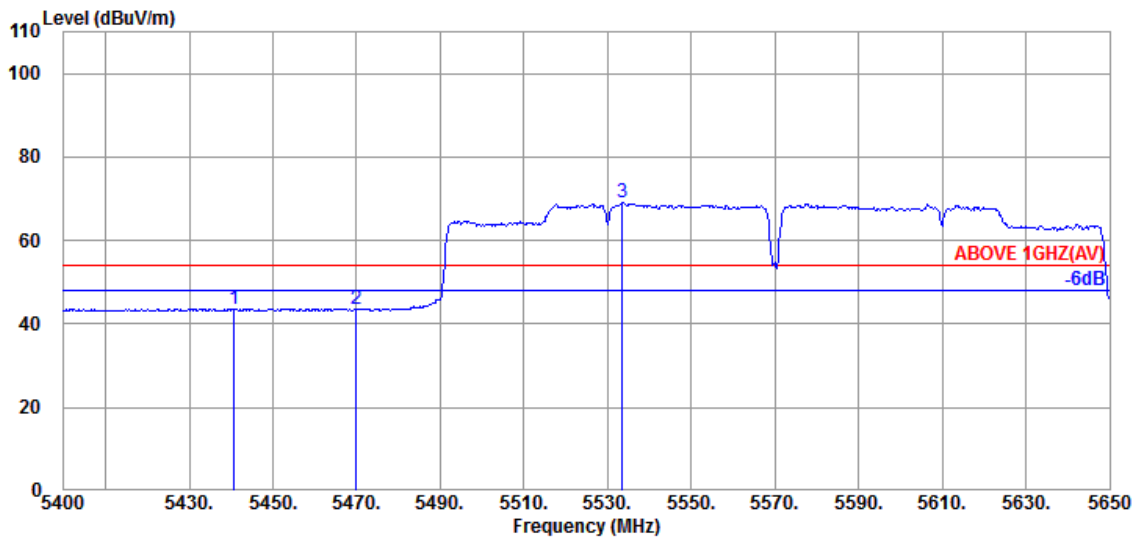


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.750	34.62	8.63	39.18	39.62	43.69	54.00	10.31	Average
5470.000	34.57	8.65	39.17	39.44	43.49	54.00	10.51	Average
@ 5533.500	34.57	8.71	39.18	65.08	69.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

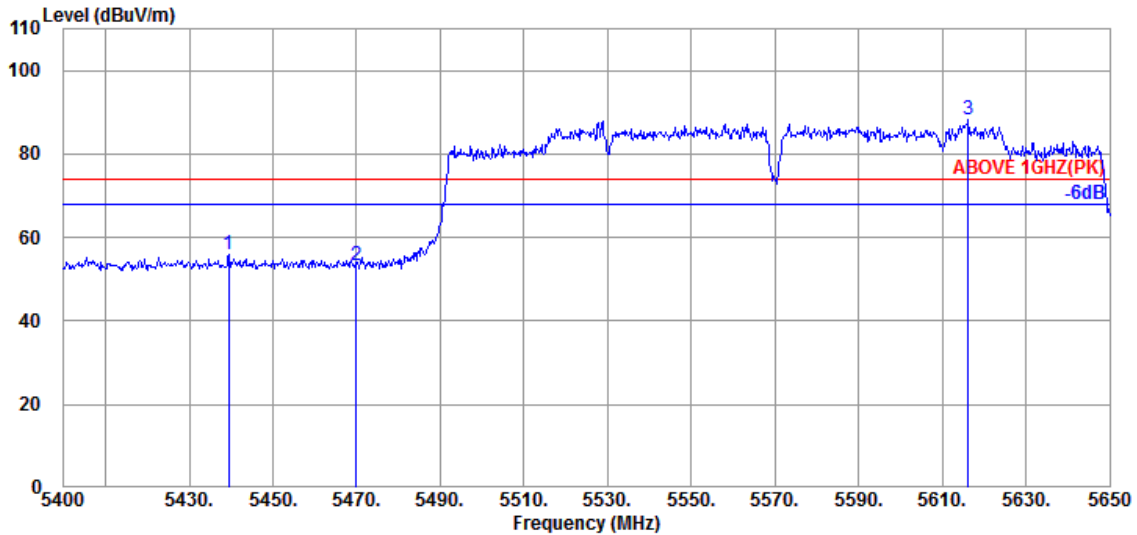

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.500	34.62	8.63	39.18	51.75	55.82	74.00	18.18	Peak
5470.000	34.57	8.65	39.17	49.09	53.14	74.00	20.86	Peak
@ 5616.250	34.60	8.78	39.20	84.01	88.19	---	---	Peak

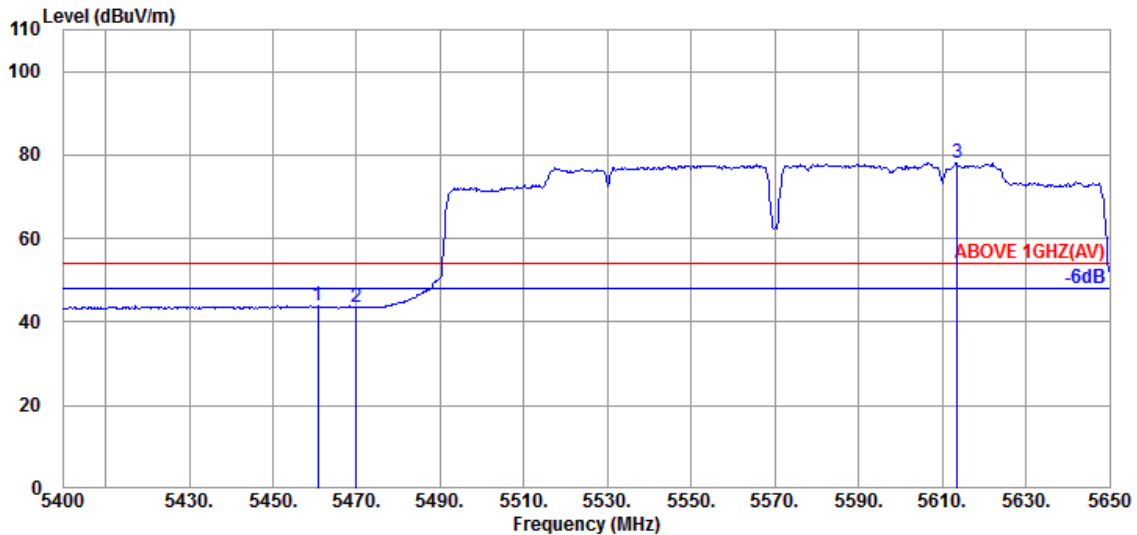


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.750	34.60	8.64	39.17	39.78	43.85	54.00	10.15	Average
5470.000	34.57	8.65	39.17	39.34	43.39	54.00	10.61	Average
@ 5613.500	34.60	8.77	39.20	73.95	78.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-2C
		Frequency	TX 5570MHz

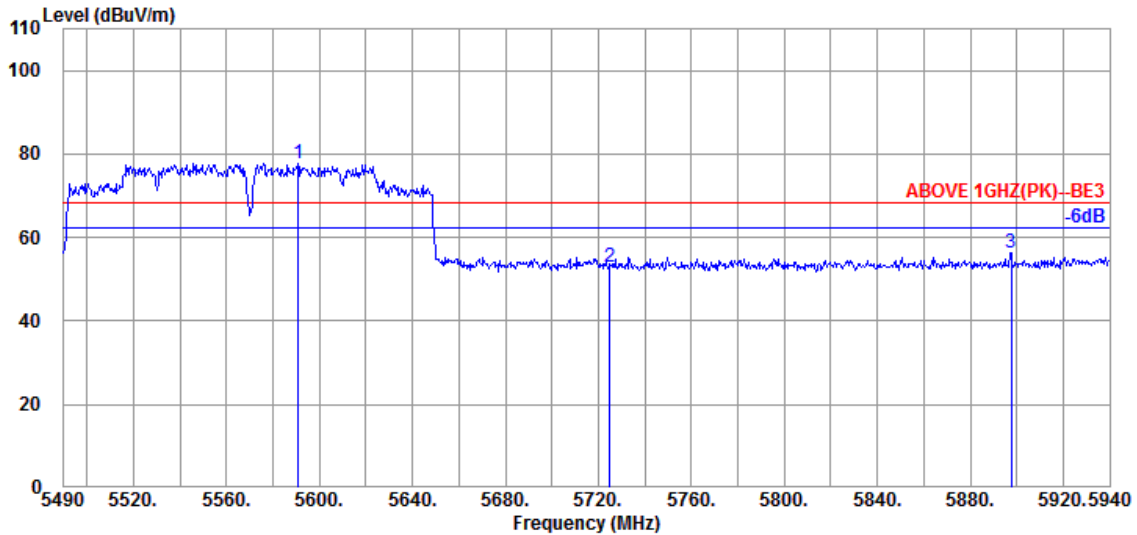

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5590.800	34.60	8.75	39.19	73.61	77.77	---	---	Peak
5724.900	34.50	8.86	39.23	48.74	52.87	68.20	15.33	Peak
5897.700	34.50	9.01	39.27	52.07	56.31	68.20	11.89	Peak

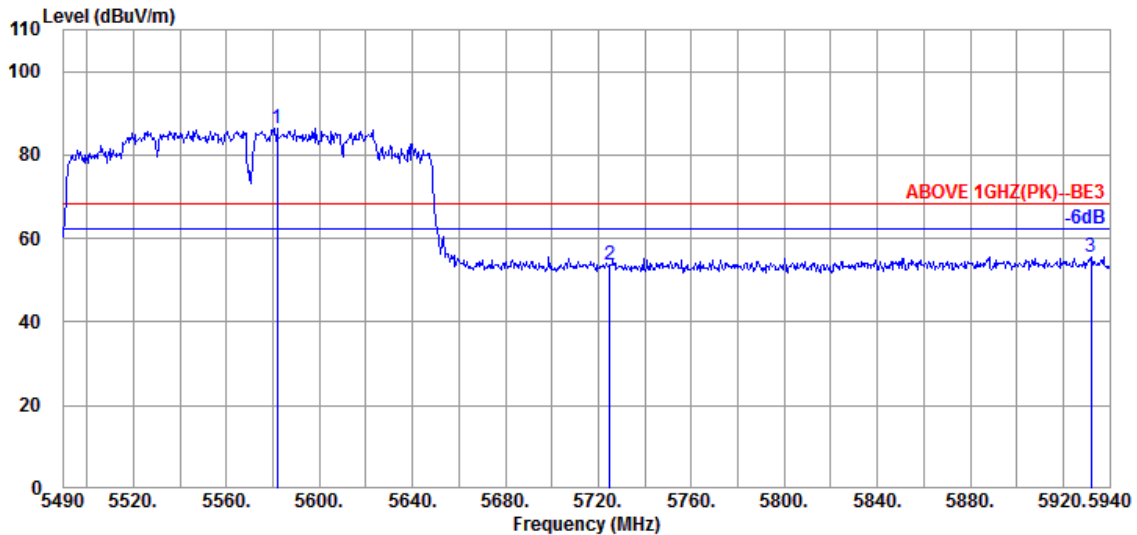


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5581.800	34.60	8.75	39.19	82.37	86.53	---	---	Peak
5724.900	34.50	8.86	39.23	49.59	53.72	68.20	14.48	Peak
5931.900	34.63	9.03	39.28	51.25	55.63	68.20	12.57	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

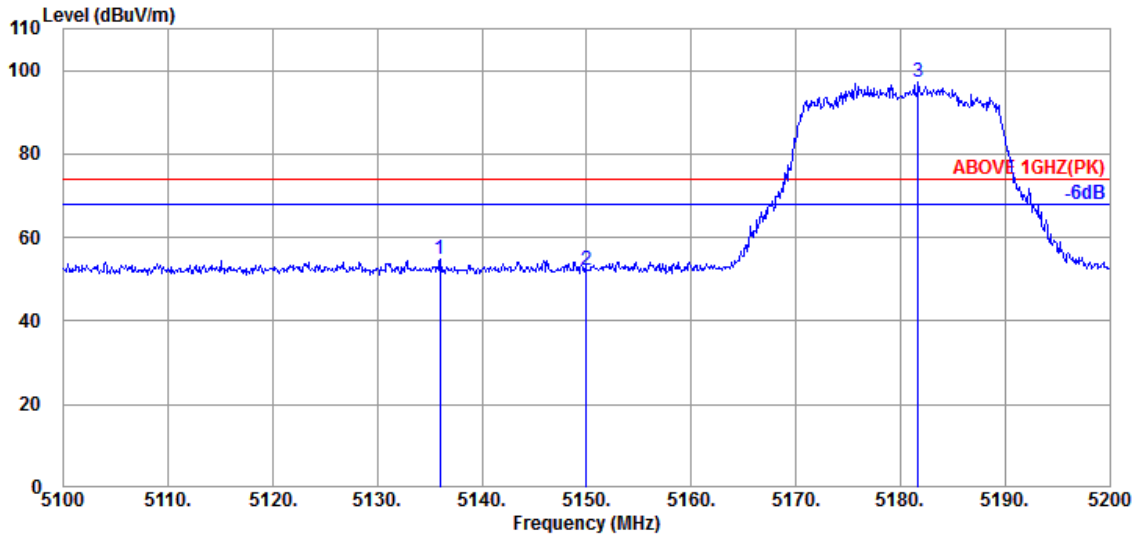

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.000	34.03	8.37	39.21	51.55	54.74	74.00	19.26	Peak
5150.000	34.10	8.39	39.21	48.94	52.22	74.00	21.78	Peak
@ 5181.700	34.23	8.41	39.21	93.88	97.31	---	---	Peak

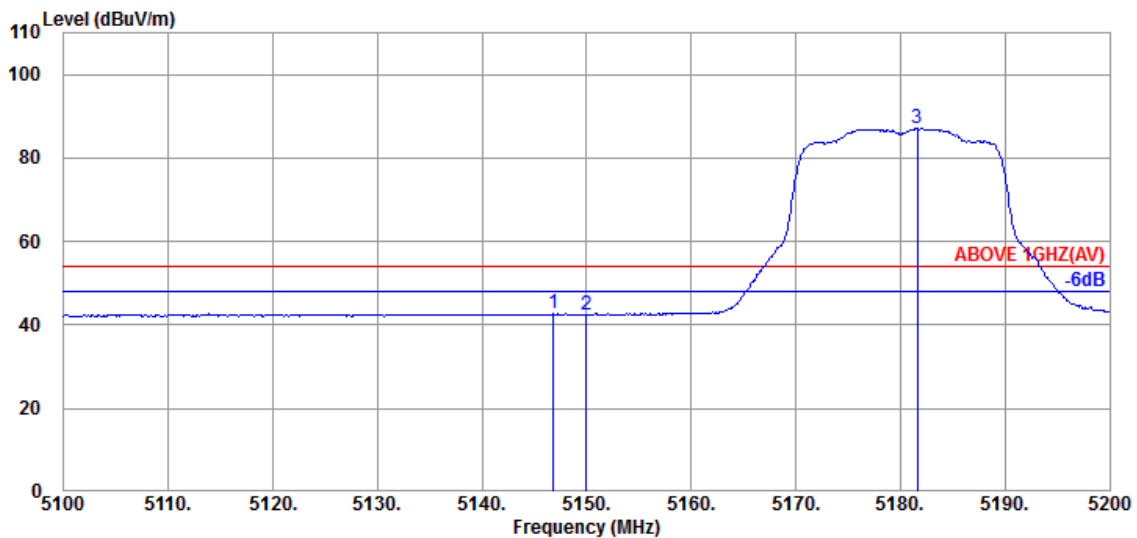


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	34.10	8.39	39.21	39.42	42.70	54.00	11.30	Average
5150.000	34.10	8.39	39.21	39.30	42.58	54.00	11.42	Average
@ 5181.600	34.23	8.41	39.21	83.81	87.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

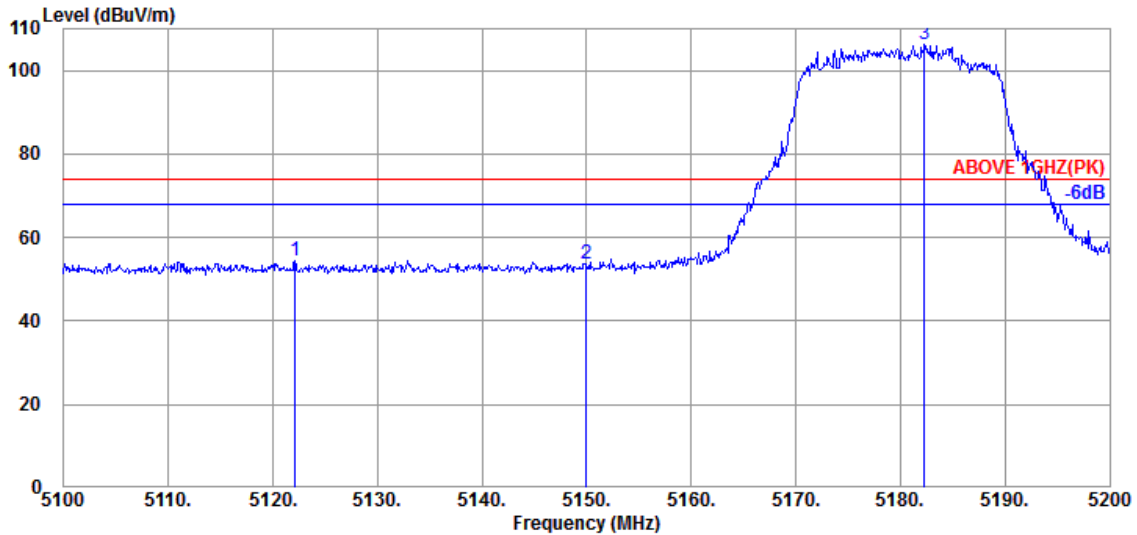

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.100	33.97	8.36	39.22	51.33	54.44	74.00	19.56	Peak
5150.000	34.10	8.39	39.21	50.23	53.51	74.00	20.49	Peak
@ 5182.300	34.23	8.41	39.21	102.74	106.17	---	---	Peak

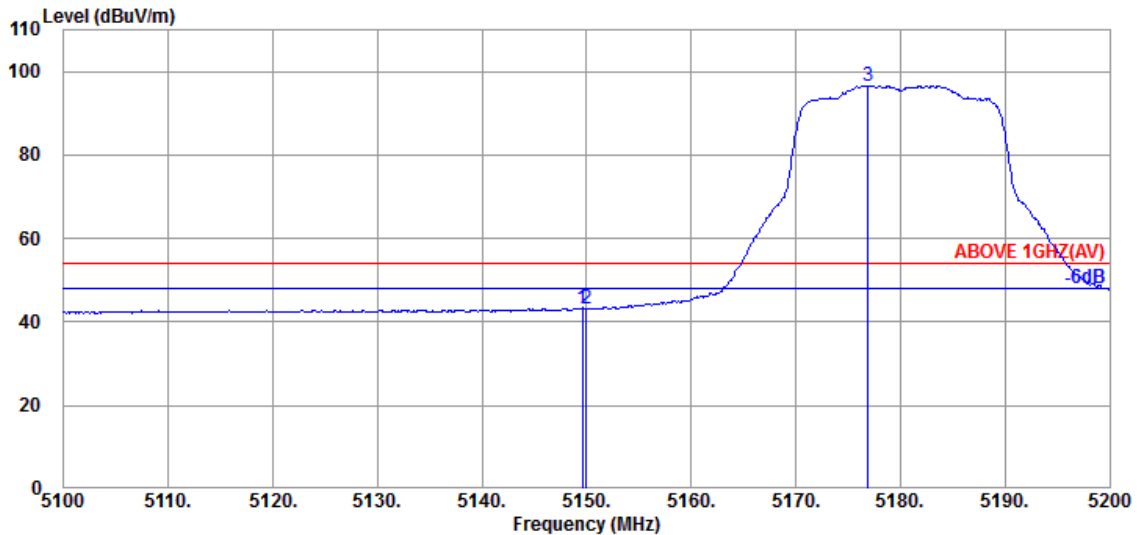


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.10	8.39	39.21	40.08	43.36	54.00	10.64	Average
5150.000	34.10	8.39	39.21	39.79	43.07	54.00	10.93	Average
@ 5176.900	34.23	8.41	39.21	93.16	96.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

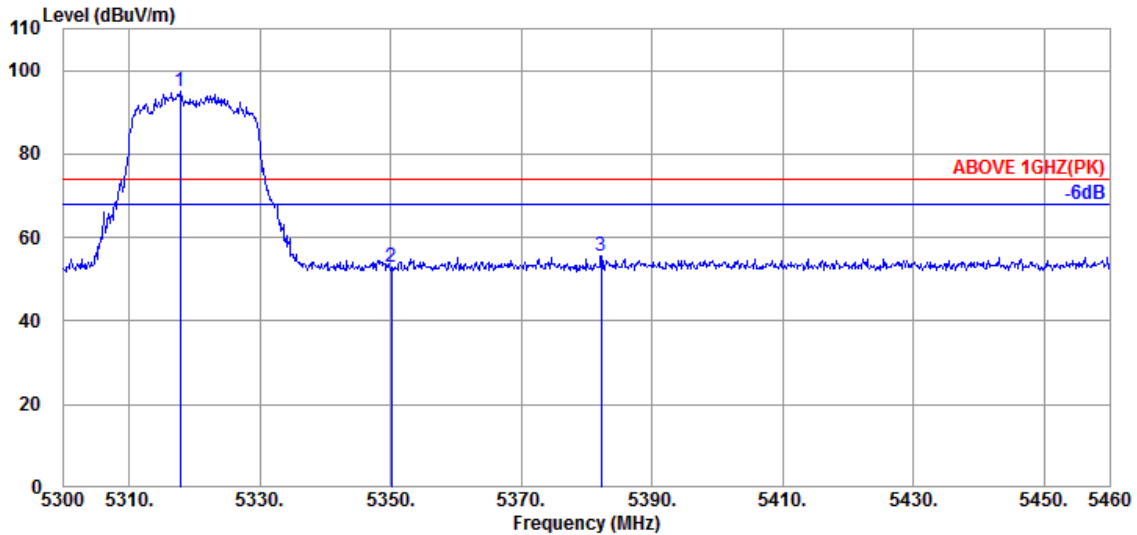

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.760	34.53	8.53	39.19	90.98	94.85	---	---	Peak
5350.080	34.60	8.56	39.19	49.12	53.09	74.00	20.91	Peak
5382.240	34.67	8.58	39.18	51.56	55.63	74.00	18.37	Peak

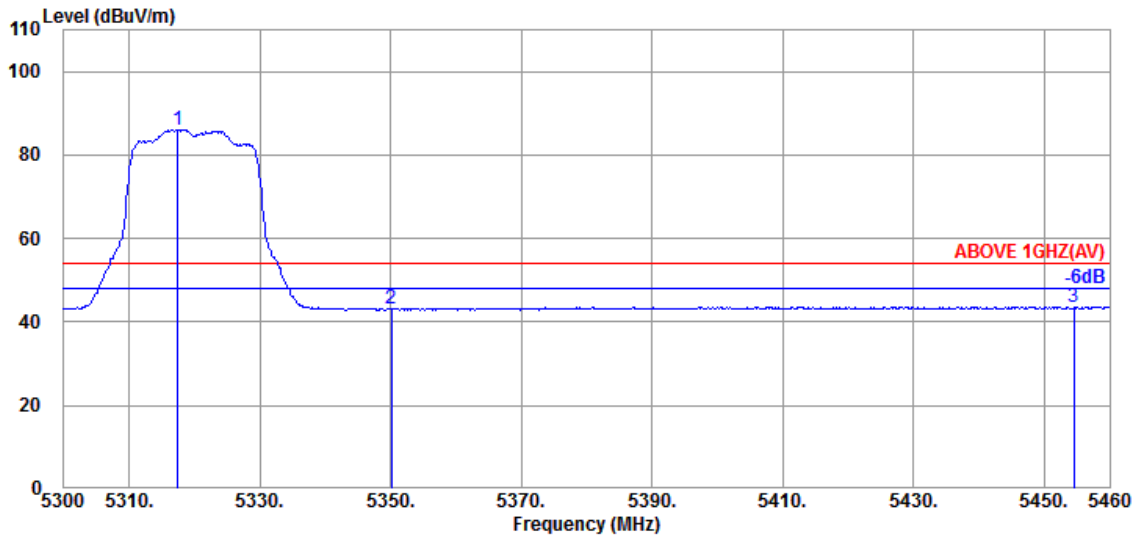


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.53	8.53	39.19	82.21	86.08	---	---	Average
5350.080	34.60	8.56	39.19	39.04	43.01	54.00	10.99	Average
5454.560	34.60	8.64	39.17	39.58	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

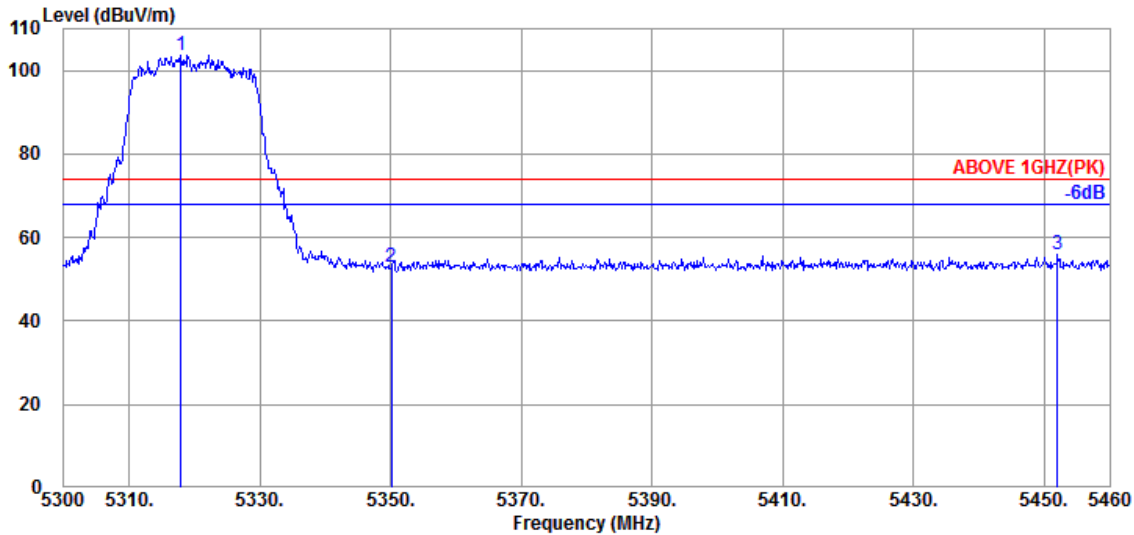

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.920	34.53	8.53	39.19	99.90	103.77	---	---	Peak
5350.080	34.60	8.56	39.19	49.08	53.05	74.00	20.95	Peak
5452.000	34.60	8.64	39.17	51.69	55.76	74.00	18.24	Peak

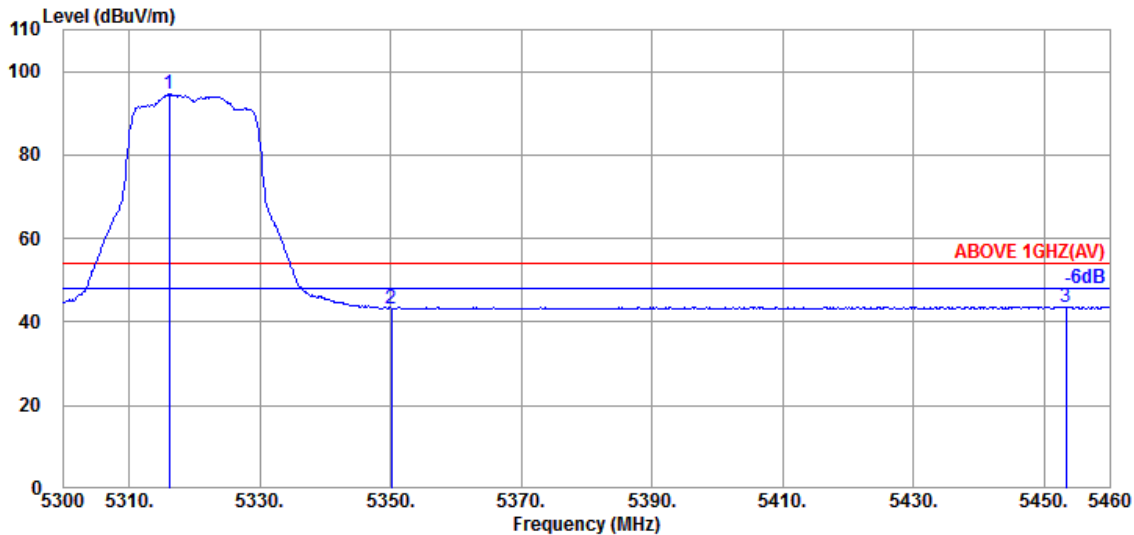


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.160	34.53	8.53	39.19	90.61	94.48	---	---	Average
5350.080	34.60	8.56	39.19	39.17	43.14	54.00	10.86	Average
5453.280	34.60	8.64	39.17	39.59	43.66	54.00	10.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

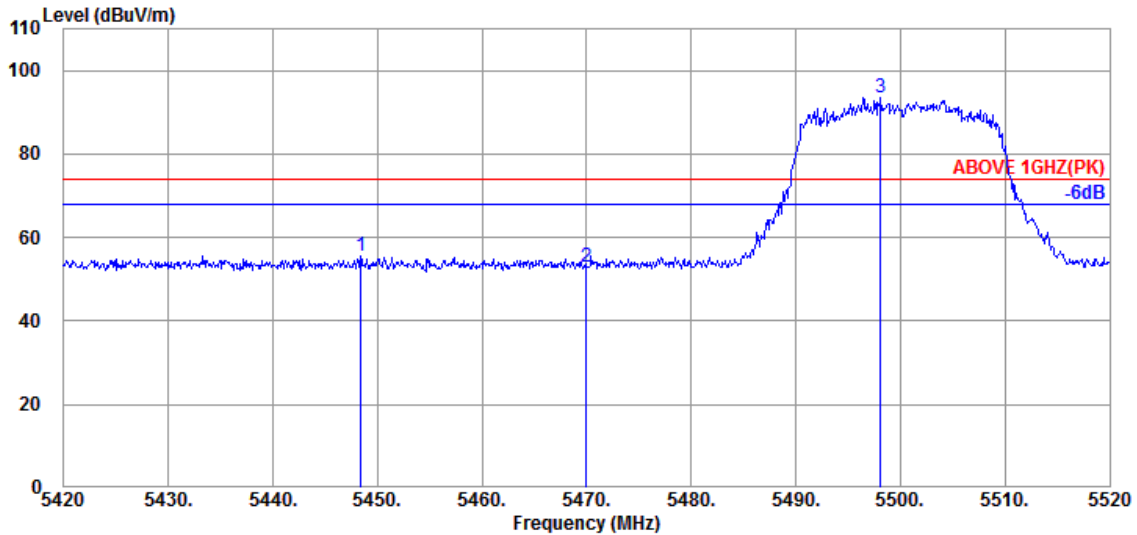

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.400	34.60	8.64	39.18	51.51	55.57	74.00	18.43	Peak
5470.000	34.57	8.65	39.17	49.02	53.07	74.00	20.93	Peak
@ 5498.100	34.50	8.68	39.17	89.54	93.55	---	---	Peak

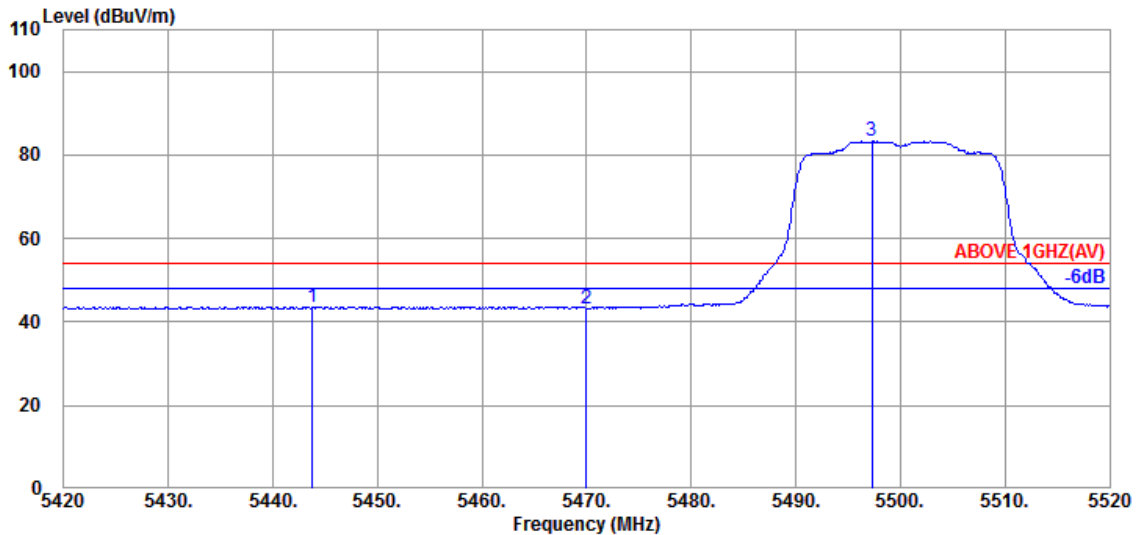


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.800	34.62	8.63	39.18	39.64	43.71	54.00	10.29	Average
5470.000	34.57	8.65	39.17	39.31	43.36	54.00	10.64	Average
@ 5497.300	34.50	8.68	39.17	79.24	83.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

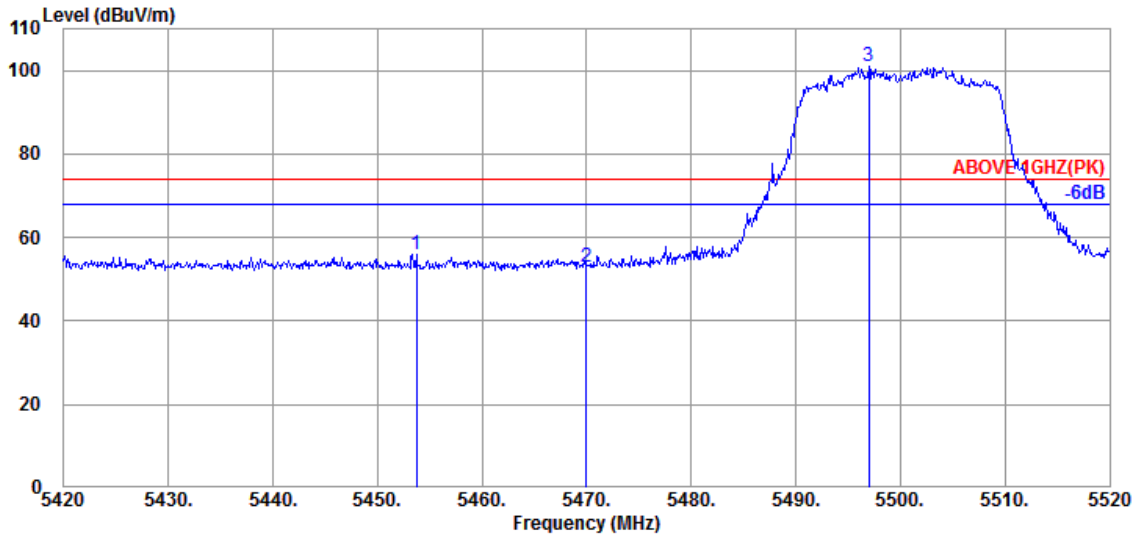

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.700	34.60	8.64	39.17	51.91	55.98	74.00	18.02	Peak
5470.000	34.57	8.65	39.17	48.86	52.91	74.00	21.09	Peak
@ 5497.000	34.50	8.68	39.17	96.80	100.81	---	---	Peak

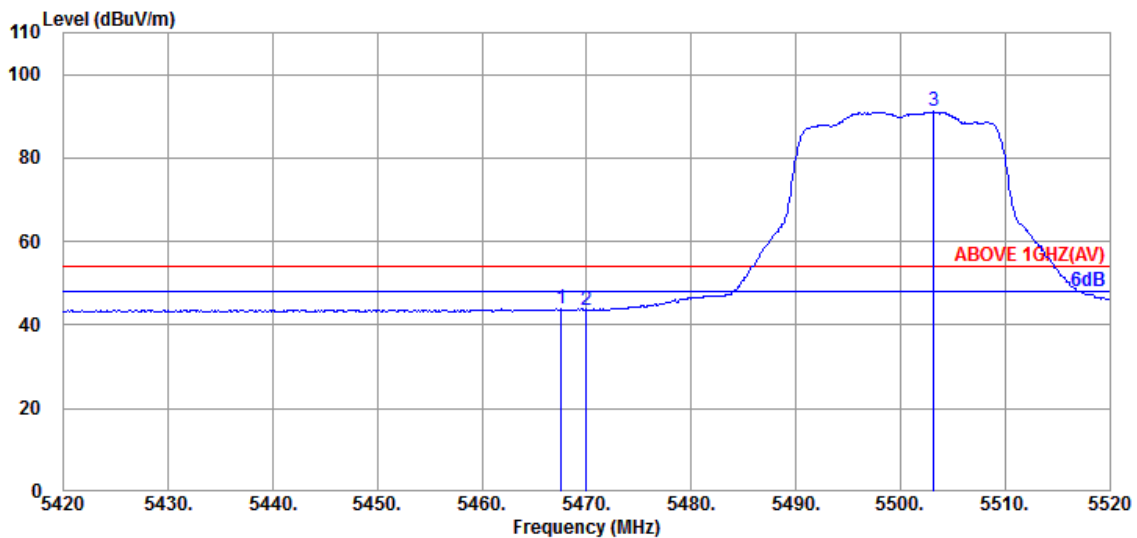


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.57	8.65	39.17	39.80	43.85	54.00	10.15	Average
5470.000	34.57	8.65	39.17	39.53	43.58	54.00	10.42	Average
@ 5503.200	34.50	8.68	39.17	87.05	91.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5700MHz

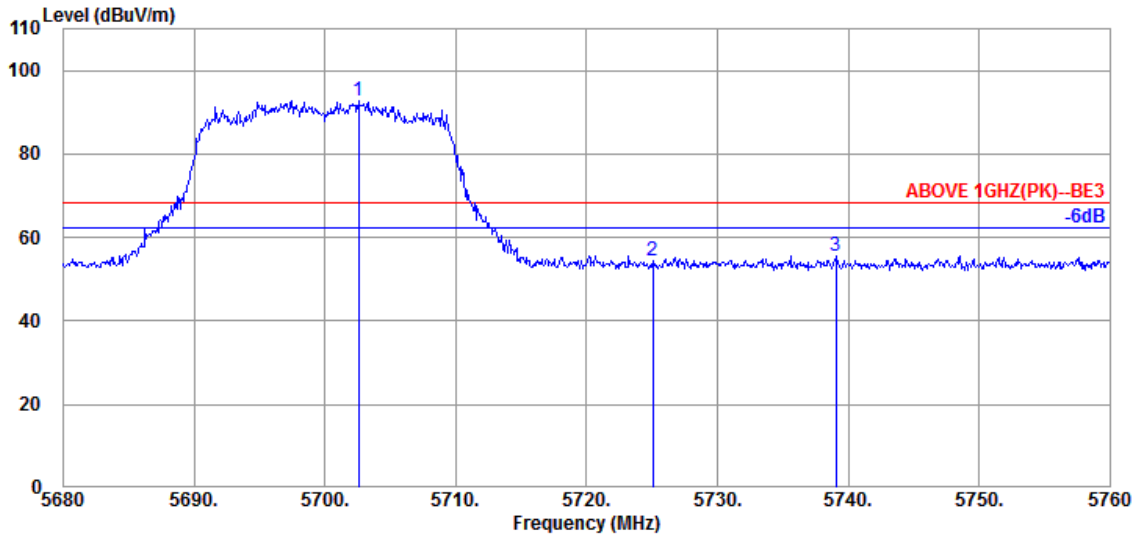

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.560	34.50	8.85	39.22	88.64	92.77	---	---	Peak
5725.040	34.50	8.86	39.23	50.30	54.43	68.20	13.77	Peak
5739.040	34.50	8.88	39.23	51.45	55.60	68.20	12.60	Peak

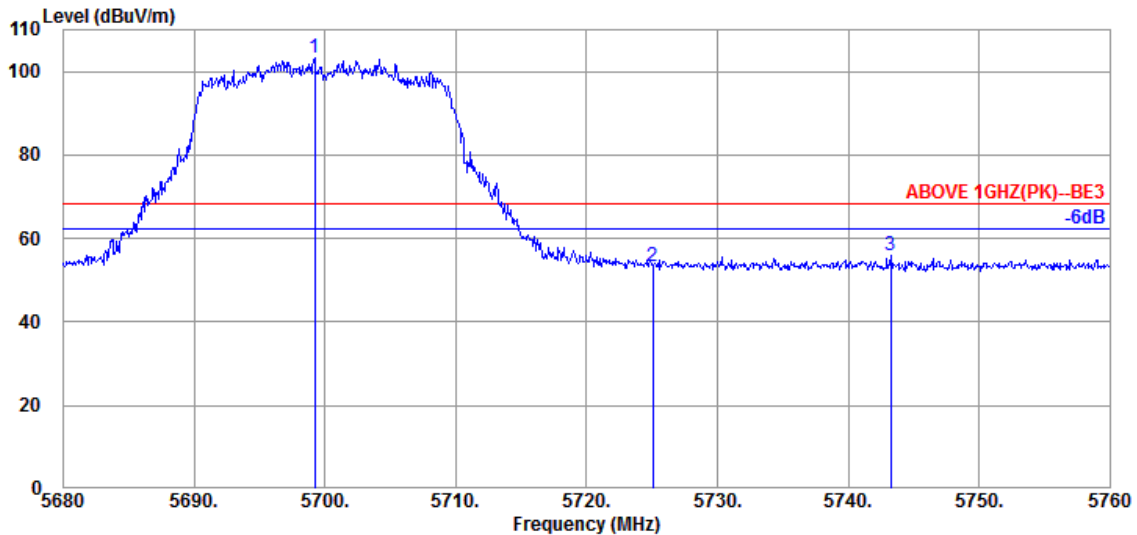


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.200	34.50	8.84	39.22	98.96	103.08	---	---	Peak
5725.040	34.50	8.86	39.23	49.24	53.37	68.20	14.83	Peak
5743.280	34.50	8.88	39.23	51.72	55.87	68.20	12.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

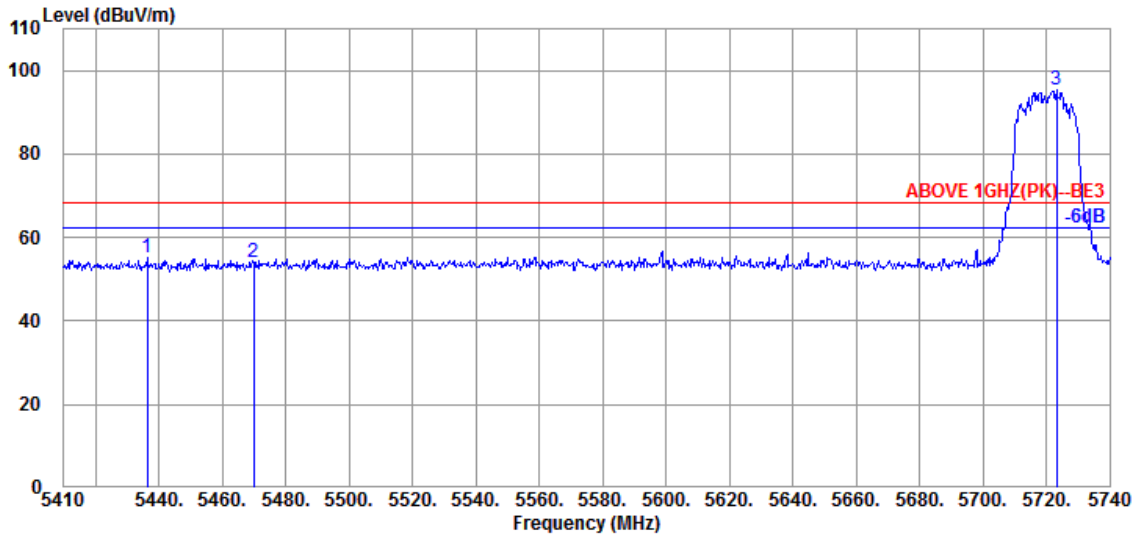

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.400	34.62	8.63	39.18	51.11	55.18	68.20	13.02	Peak
5470.060	34.57	8.65	39.17	50.09	54.14	68.20	14.06	Peak
@ 5723.170	34.50	8.86	39.23	91.21	95.34	---	---	Peak

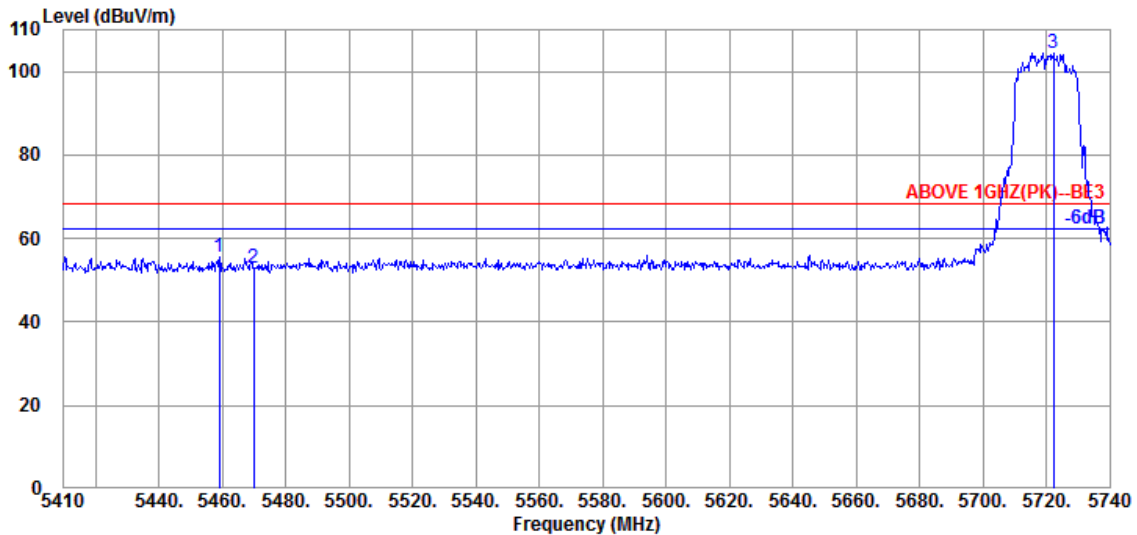


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.170	34.60	8.64	39.17	51.48	55.55	68.20	12.65	Peak
5470.060	34.57	8.65	39.17	48.81	52.86	68.20	15.34	Peak
@ 5722.180	34.50	8.86	39.23	100.40	104.53	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

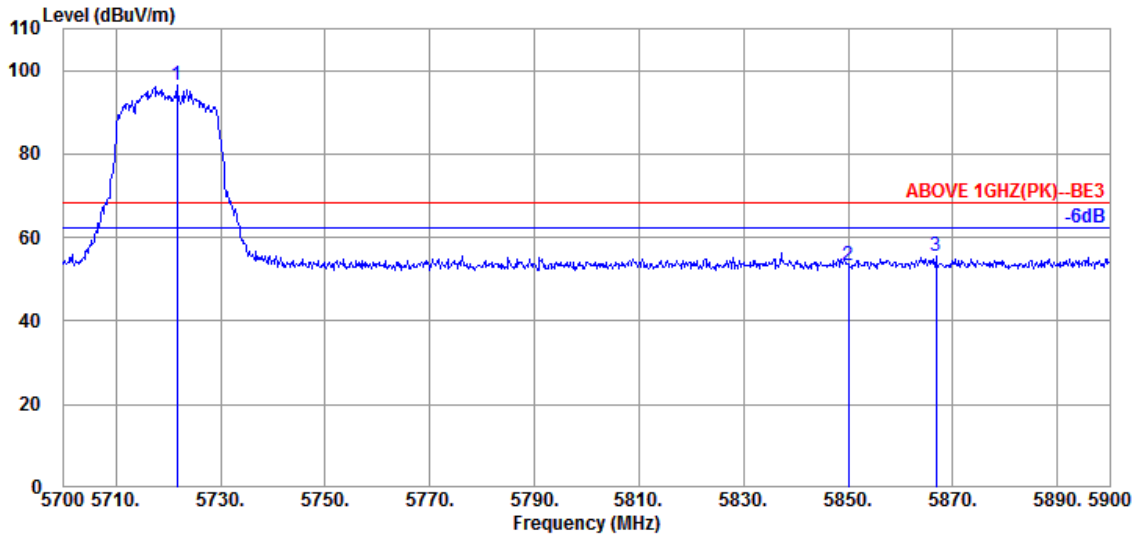

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.600	34.50	8.86	39.23	92.37	96.50	---	---	Peak
5850.000	34.40	8.96	39.26	49.23	53.33	68.20	14.87	Peak
5866.800	34.43	8.98	39.27	51.26	55.40	68.20	12.80	Peak

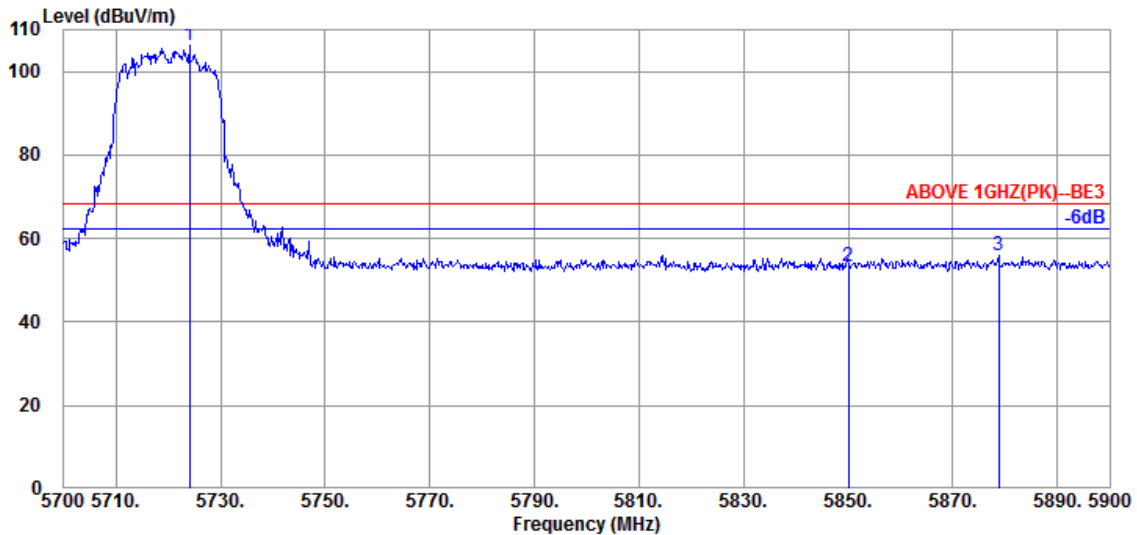


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	34.50	8.86	39.23	101.98	106.11	---	---	Peak
5850.000	34.40	8.96	39.26	49.18	53.28	68.20	14.92	Peak
5878.800	34.47	8.99	39.27	51.73	55.92	68.20	12.28	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

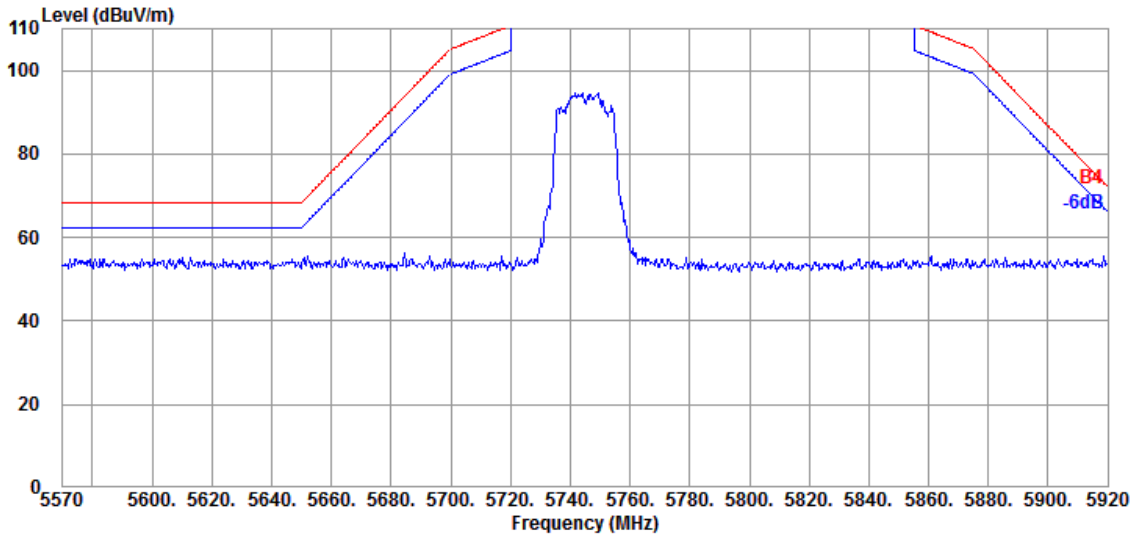


Antenna at Vertical Polarization

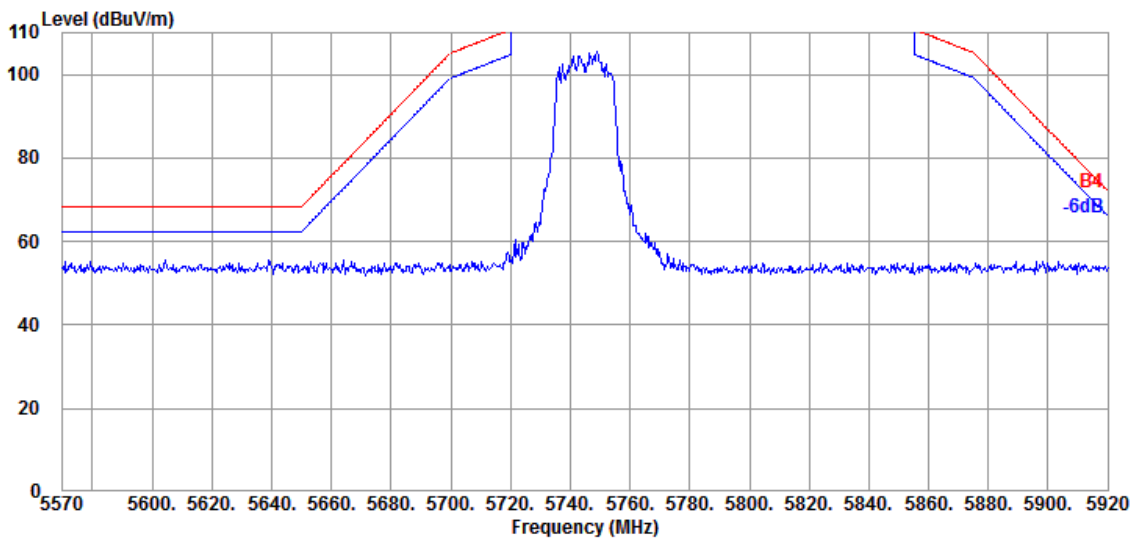


Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

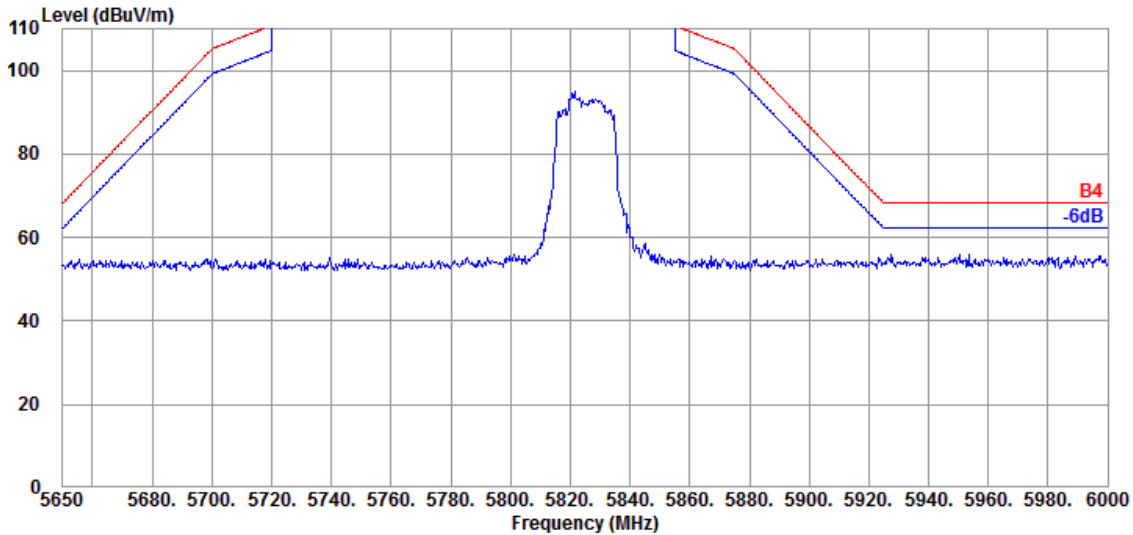

Antenna at Vertical Polarization

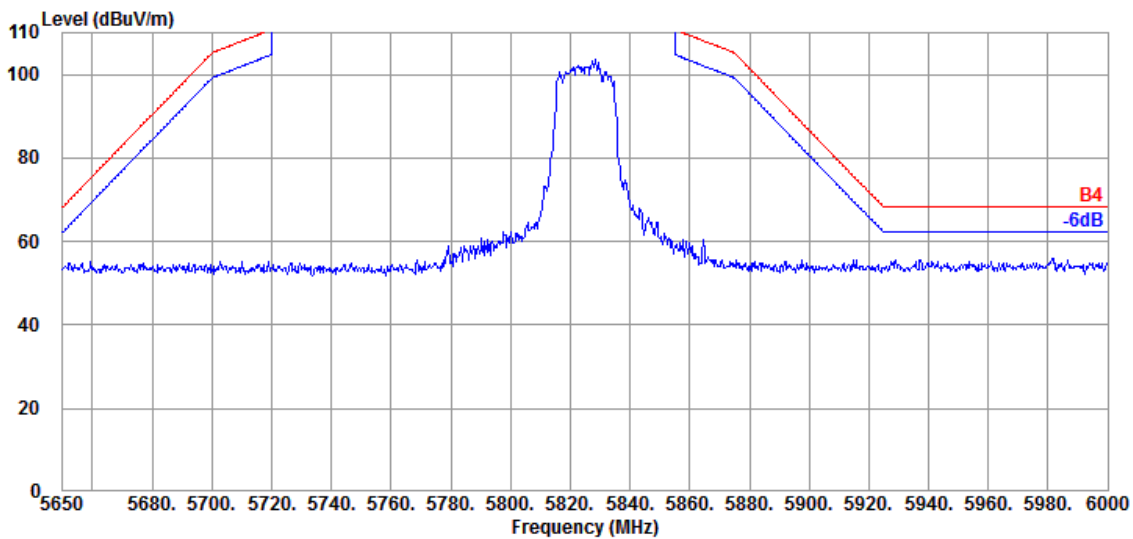


Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

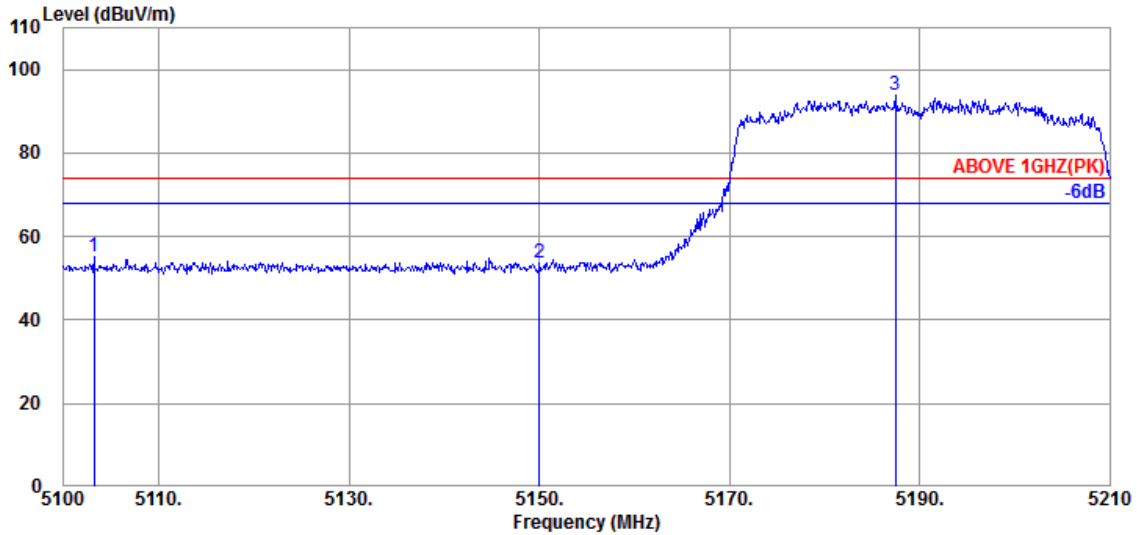

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.190	33.90	8.34	39.22	52.04	55.06	74.00	18.94	Peak
5150.050	34.10	8.39	39.21	50.38	53.66	74.00	20.34	Peak
@ 5187.450	34.30	8.41	39.21	90.29	93.79	---	---	Peak

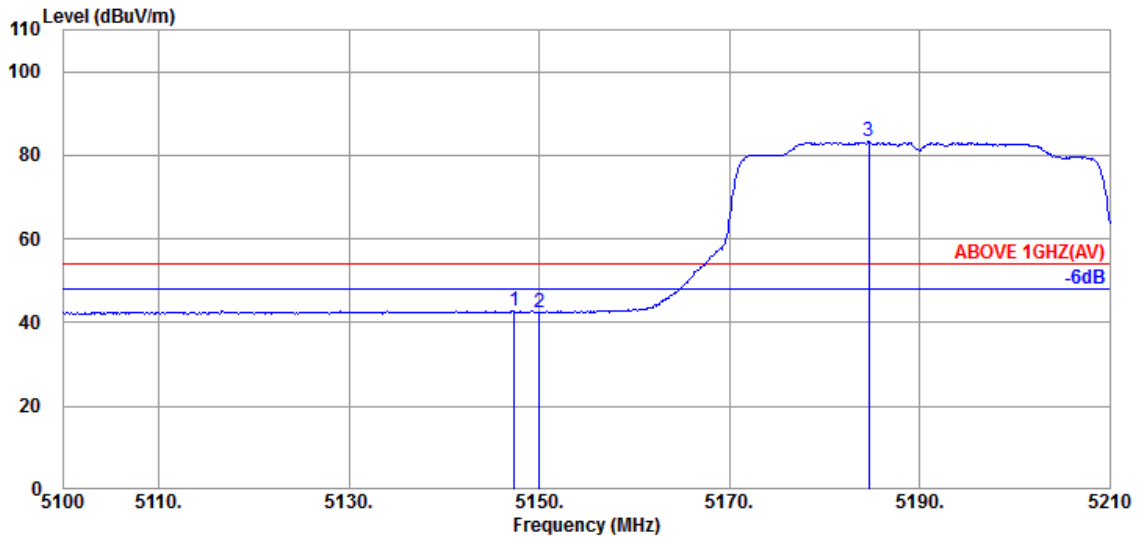


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.410	34.10	8.39	39.21	39.53	42.81	54.00	11.19	Average
5150.050	34.10	8.39	39.21	39.23	42.51	54.00	11.49	Average
@ 5184.700	34.23	8.41	39.21	79.79	83.22	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

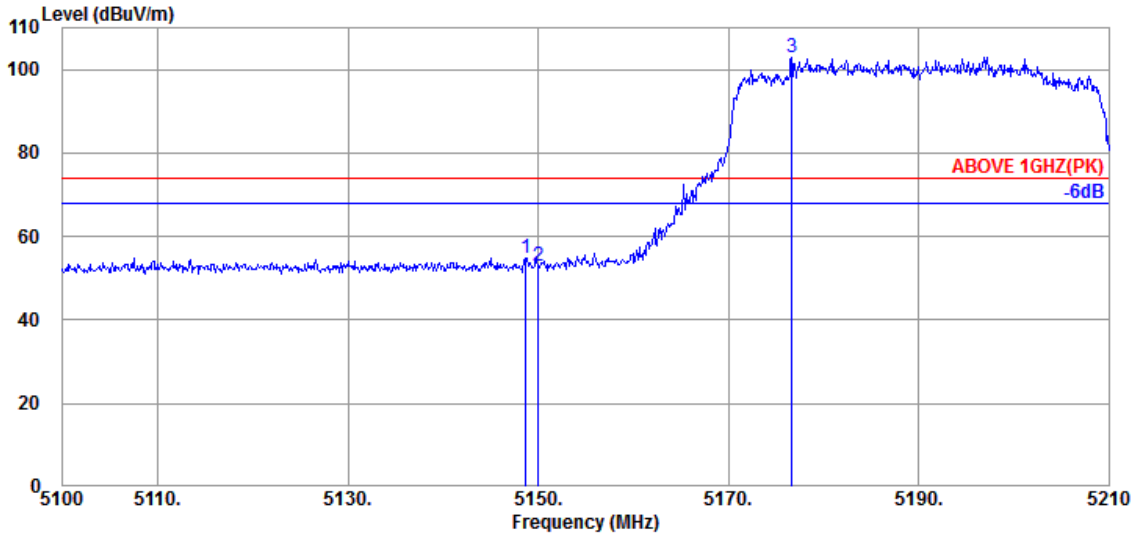

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	34.10	8.39	39.21	51.50	54.78	74.00	19.22	Peak
5150.050	34.10	8.39	39.21	49.48	52.76	74.00	21.24	Peak
@ 5176.670	34.23	8.41	39.21	99.54	102.97	---	---	Peak

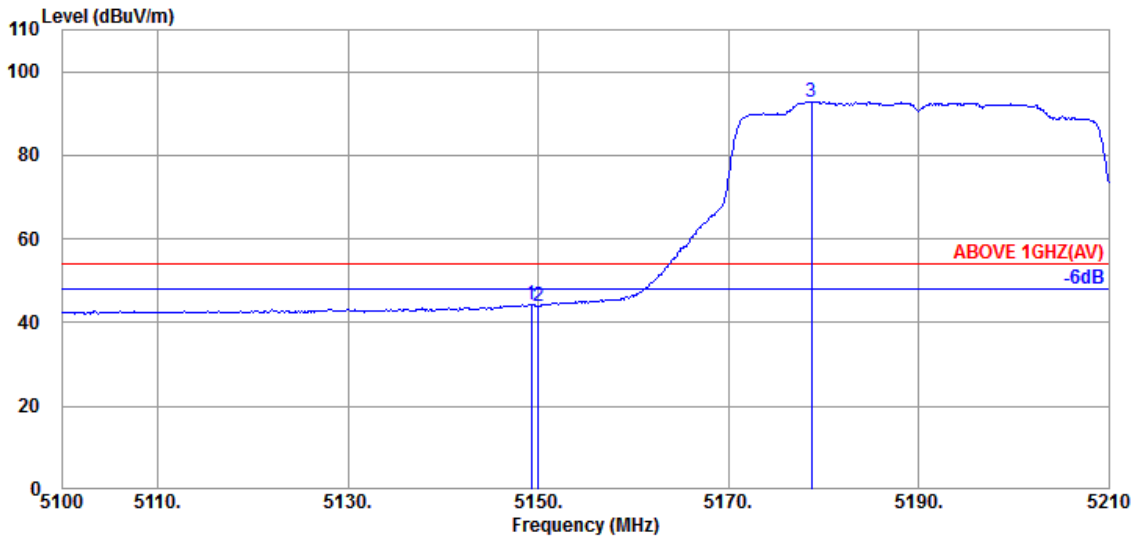


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.10	8.39	39.21	41.03	44.31	54.00	9.69	Average
5150.050	34.10	8.39	39.21	40.64	43.92	54.00	10.08	Average
@ 5178.760	34.23	8.41	39.21	89.45	92.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

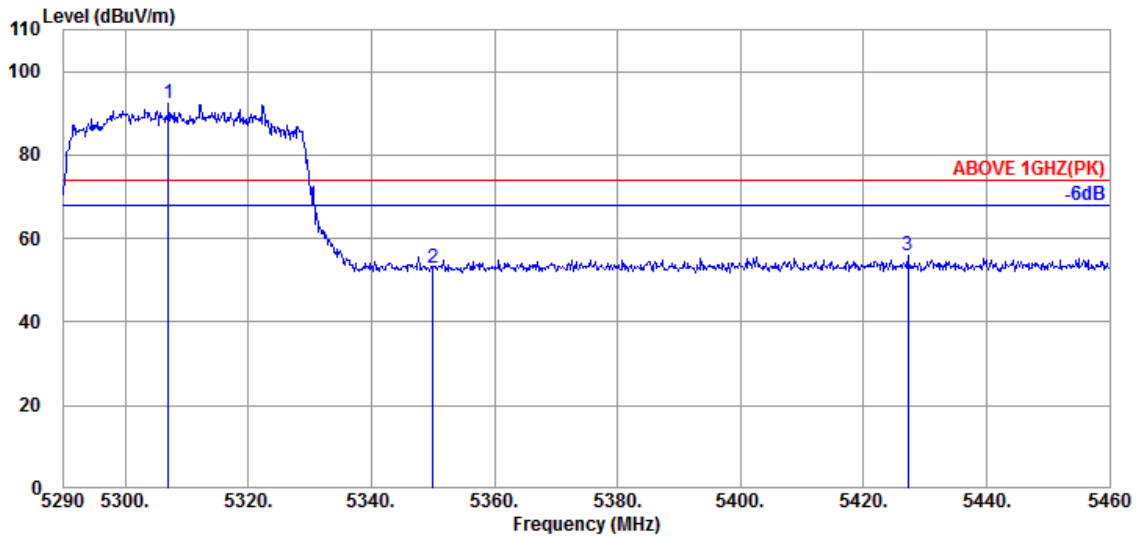

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.000	34.50	8.51	39.19	88.62	92.44	---	---	Peak
5350.010	34.60	8.56	39.19	49.12	53.09	74.00	20.91	Peak
5427.190	34.65	8.61	39.18	51.72	55.80	74.00	18.20	Peak

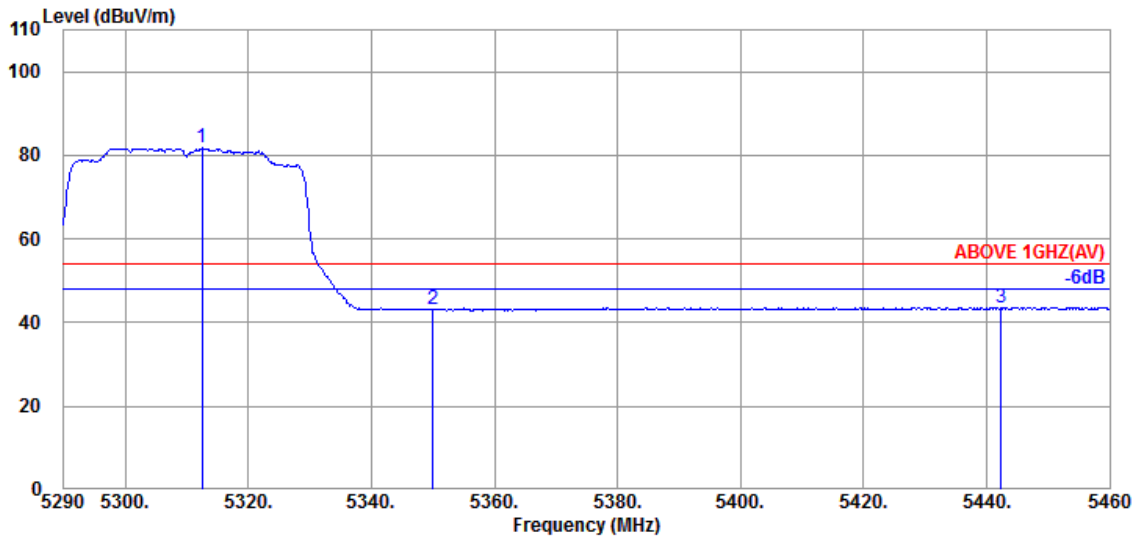


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.440	34.53	8.53	39.19	77.82	81.69	---	---	Average
5350.010	34.60	8.56	39.19	39.08	43.05	54.00	10.95	Average
5442.320	34.62	8.63	39.18	39.58	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

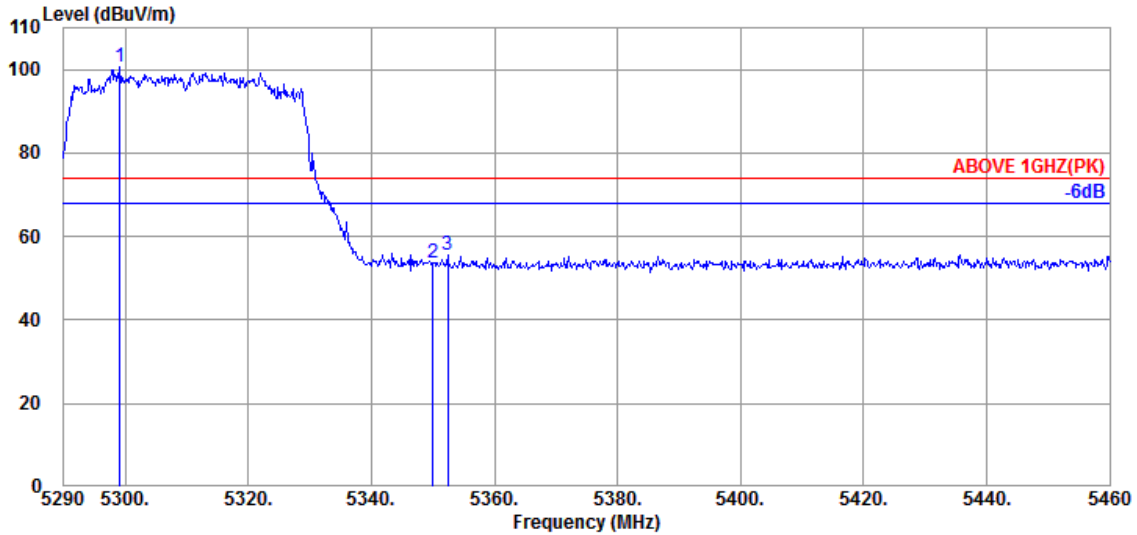

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.180	34.50	8.51	39.19	96.65	100.47	---	---	Peak
5350.010	34.60	8.56	39.19	49.56	53.53	74.00	20.47	Peak
5352.390	34.60	8.56	39.19	51.57	55.54	74.00	18.46	Peak

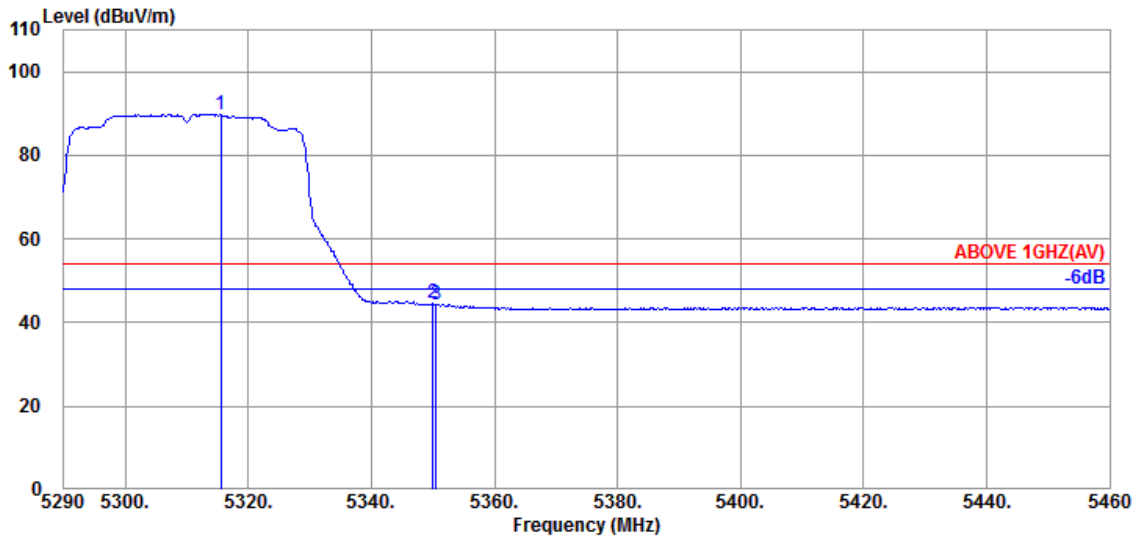


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.500	34.53	8.53	39.19	85.88	89.75	---	---	Average
5350.010	34.60	8.56	39.19	40.52	44.49	54.00	9.51	Average
5350.520	34.60	8.56	39.19	40.46	44.43	54.00	9.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

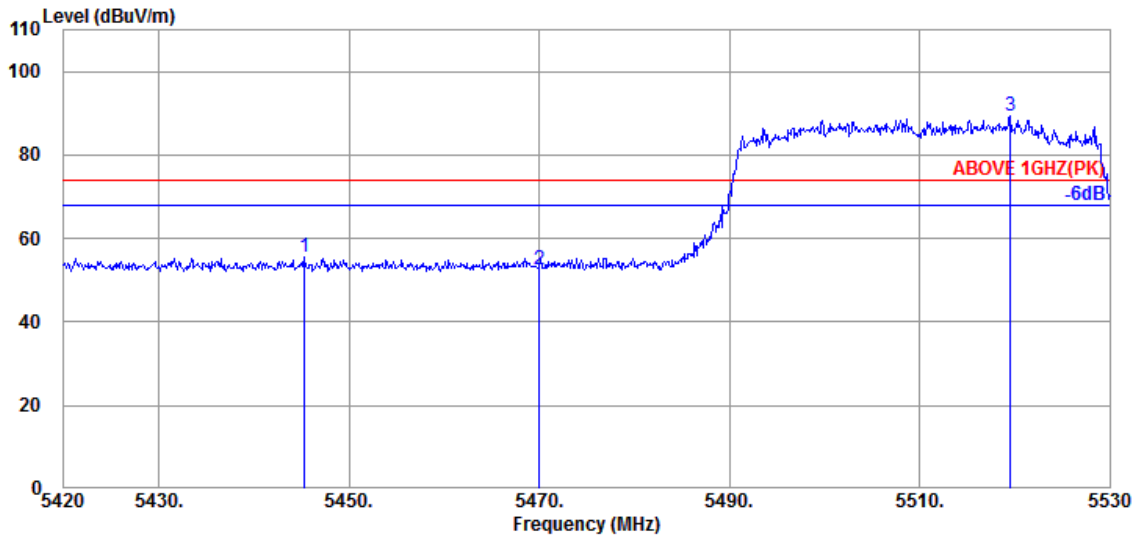

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.300	34.62	8.63	39.18	51.31	55.38	74.00	18.62	Peak
5470.050	34.57	8.65	39.17	48.51	52.56	74.00	21.44	Peak
@ 5519.550	34.53	8.70	39.17	85.28	89.34	---	---	Peak

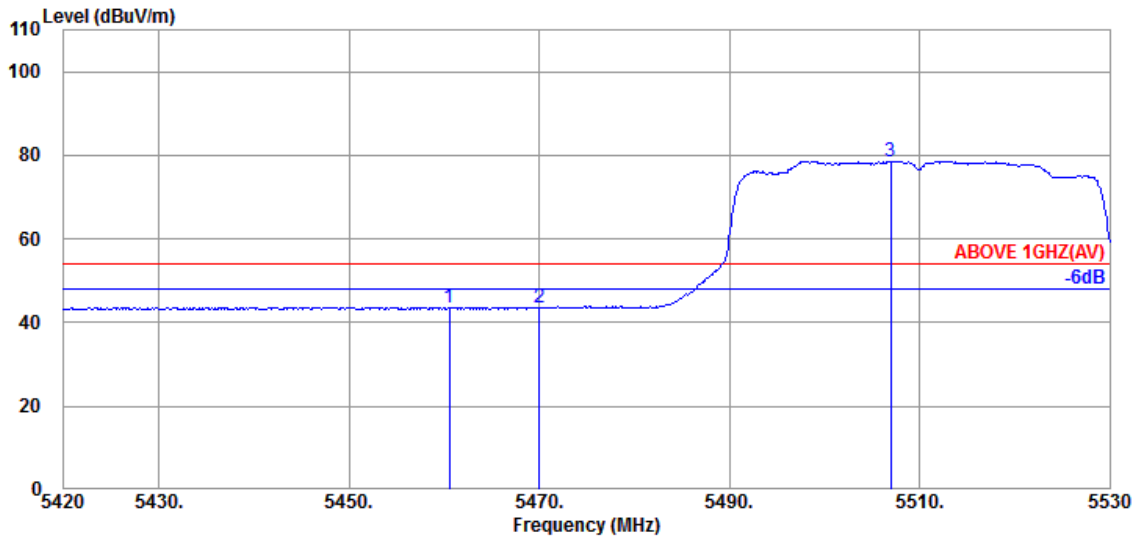


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.590	34.60	8.64	39.17	39.57	43.64	54.00	10.36	Average
5470.050	34.57	8.65	39.17	39.44	43.49	54.00	10.51	Average
@ 5507.010	34.50	8.68	39.17	74.53	78.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

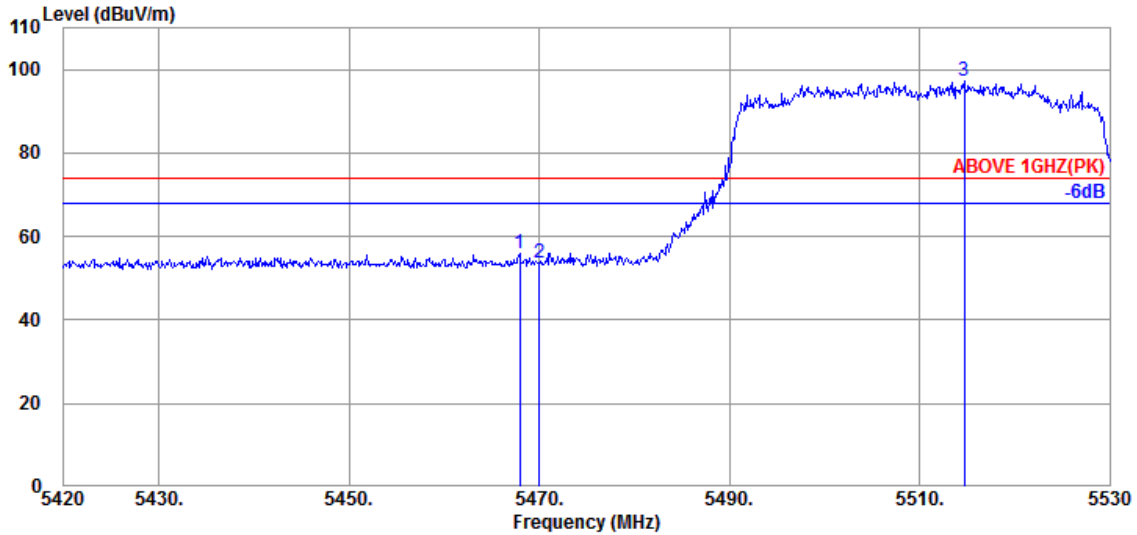

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.960	34.57	8.65	39.17	51.70	55.75	74.00	18.25	Peak
5470.050	34.57	8.65	39.17	49.50	53.55	74.00	20.45	Peak
@ 5514.710	34.53	8.70	39.17	92.99	97.05	---	---	Peak

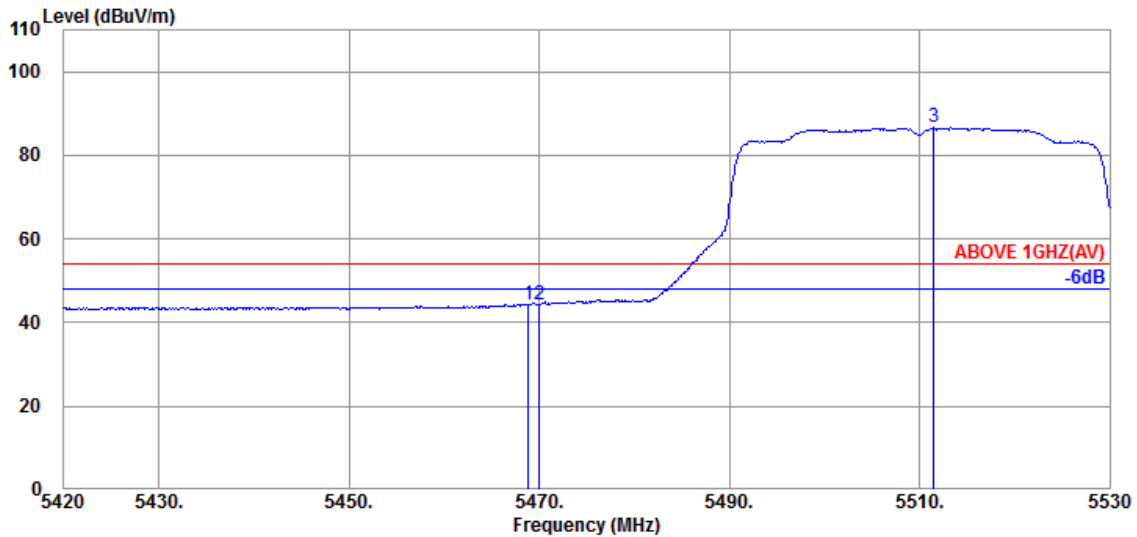


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.57	8.65	39.17	40.36	44.41	54.00	9.59	Average
5470.050	34.57	8.65	39.17	40.30	44.35	54.00	9.65	Average
@ 5511.520	34.53	8.68	39.17	82.52	86.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

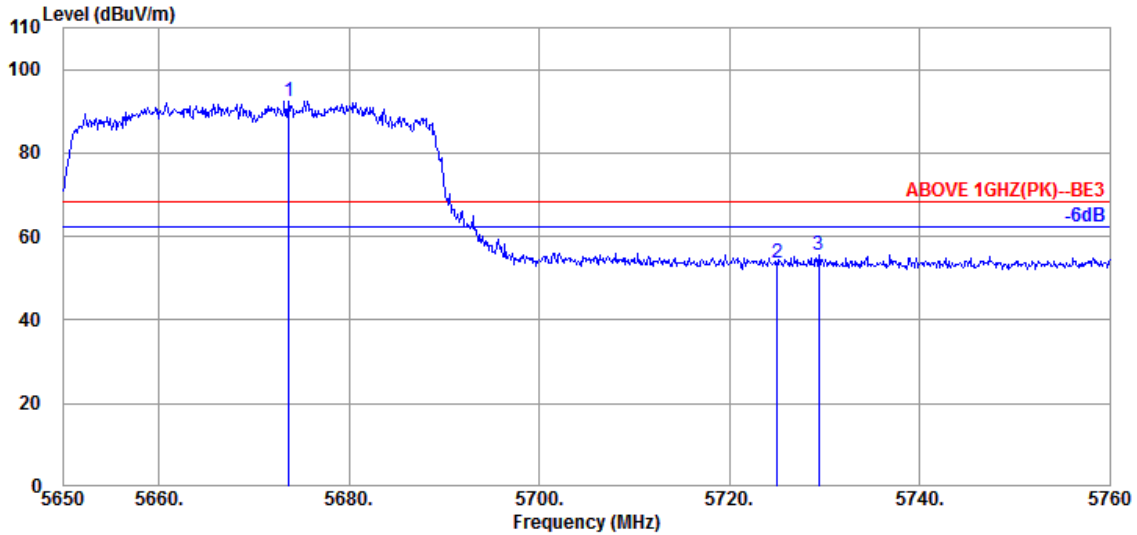

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.650	34.53	8.82	39.22	88.30	92.43	---	---	Peak
5725.020	34.50	8.86	39.23	49.38	53.51	68.20	14.69	Peak
5729.420	34.50	8.86	39.23	51.61	55.74	68.20	12.46	Peak

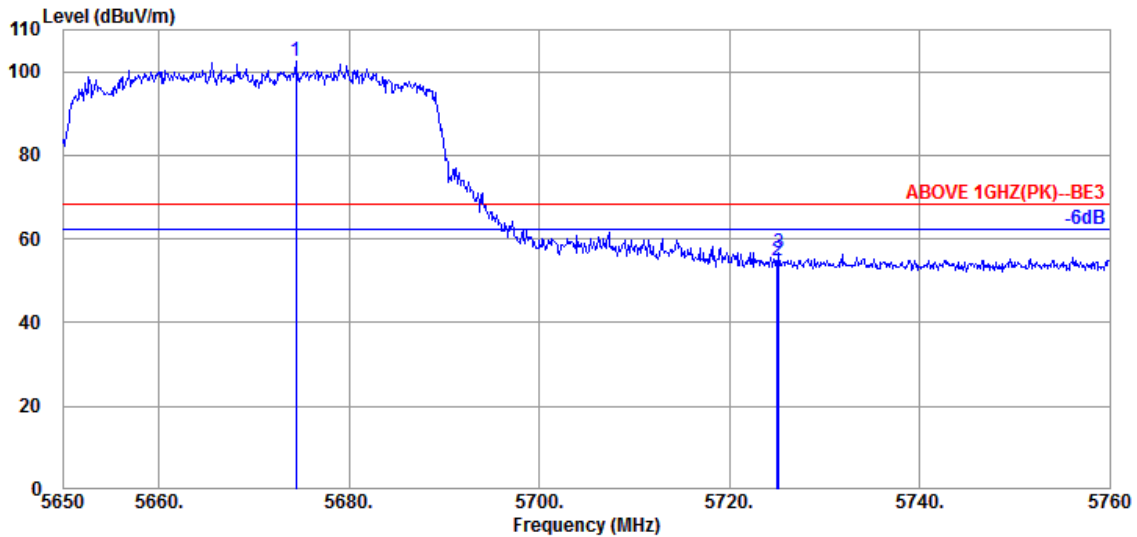


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.420	34.53	8.82	39.22	98.35	102.48	---	---	Peak
5725.020	34.50	8.86	39.23	50.67	54.80	68.20	13.40	Peak
5725.240	34.50	8.86	39.23	52.41	56.54	68.20	11.66	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

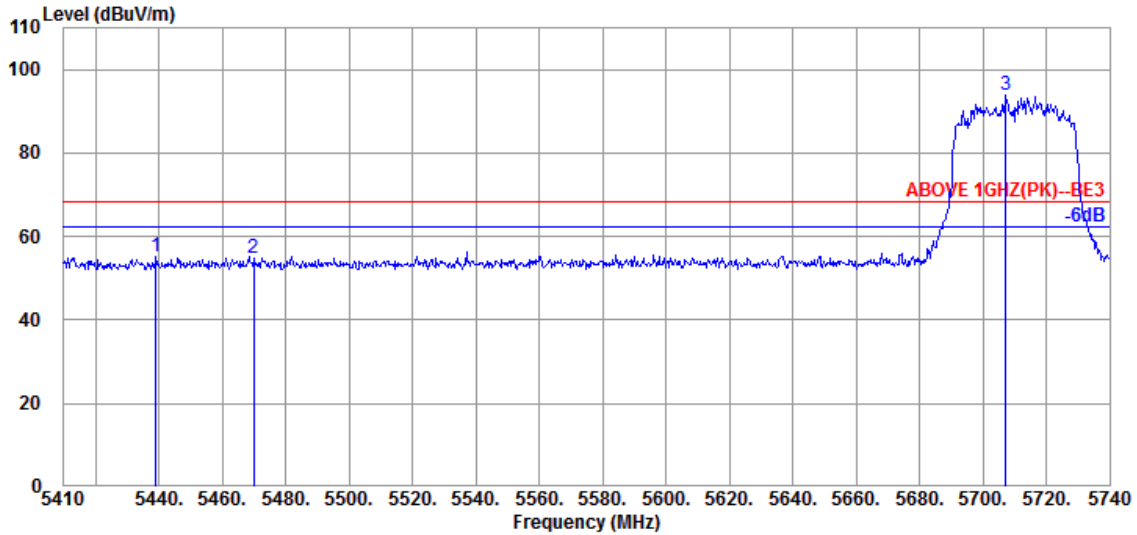

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.040	34.62	8.63	39.18	51.10	55.17	68.20	13.03	Peak
5470.060	34.57	8.65	39.17	50.69	54.74	68.20	13.46	Peak
@ 5707.330	34.50	8.85	39.22	89.64	93.77	---	---	Peak

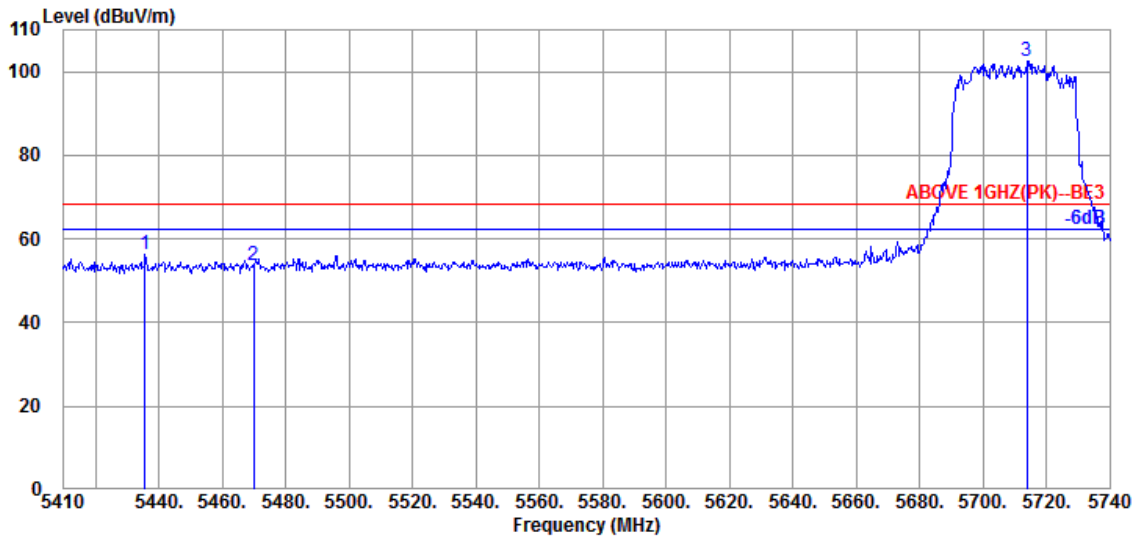


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.740	34.62	8.63	39.18	52.14	56.21	68.20	11.99	Peak
5470.060	34.57	8.65	39.17	49.51	53.56	68.20	14.64	Peak
@ 5713.930	34.50	8.85	39.23	98.46	102.58	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

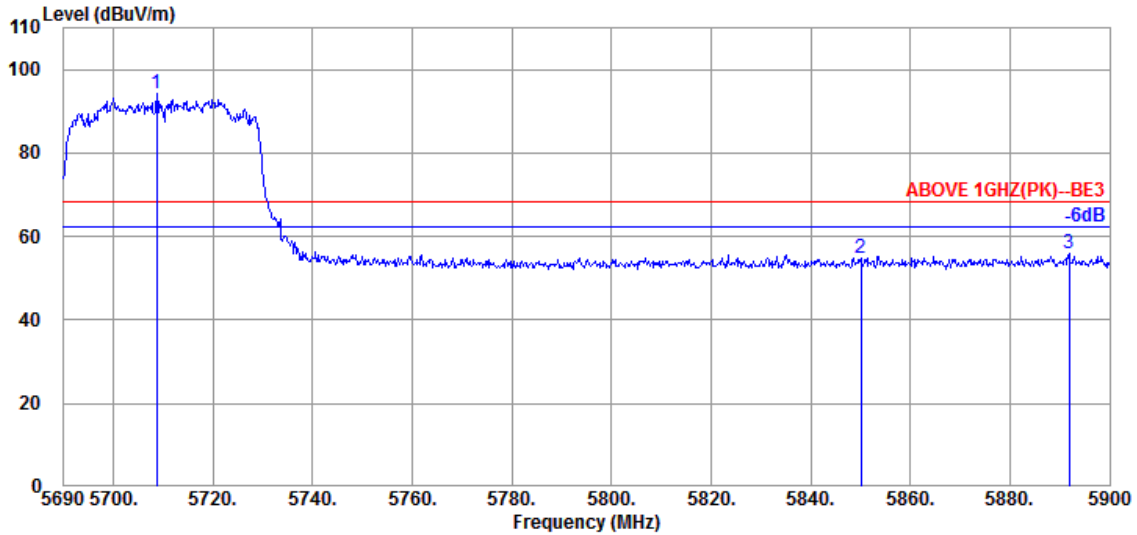

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.690	34.50	8.85	39.23	90.16	94.28	---	---	Peak
5850.020	34.40	8.96	39.26	50.59	54.69	68.20	13.51	Peak
5891.810	34.50	9.01	39.27	51.66	55.90	68.20	12.30	Peak

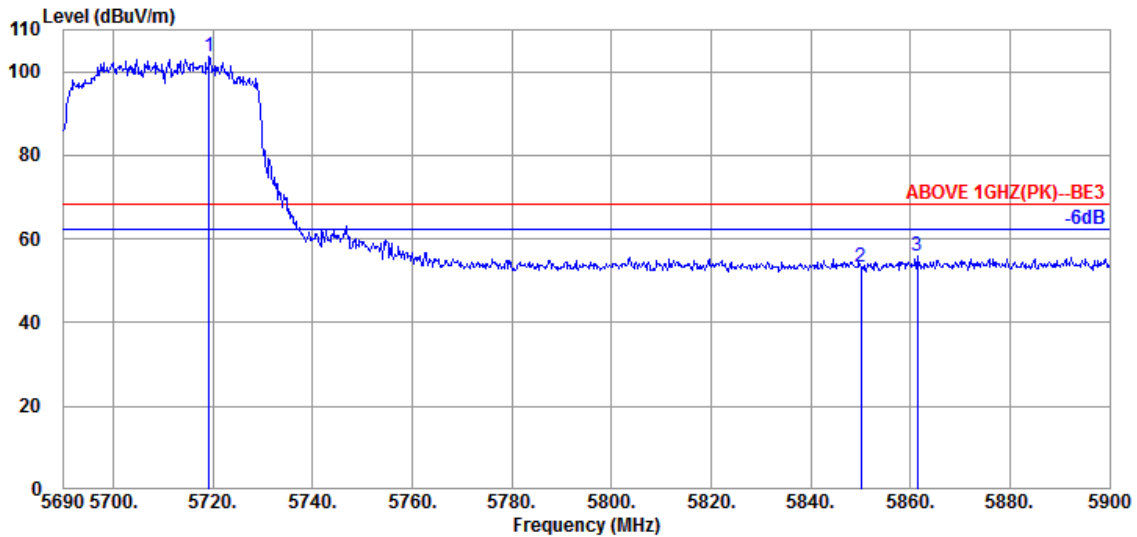


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.190	34.50	8.86	39.23	99.51	103.64	---	---	Peak
5850.020	34.40	8.96	39.26	49.15	53.25	68.20	14.95	Peak
5861.360	34.43	8.98	39.27	51.89	56.03	68.20	12.17	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

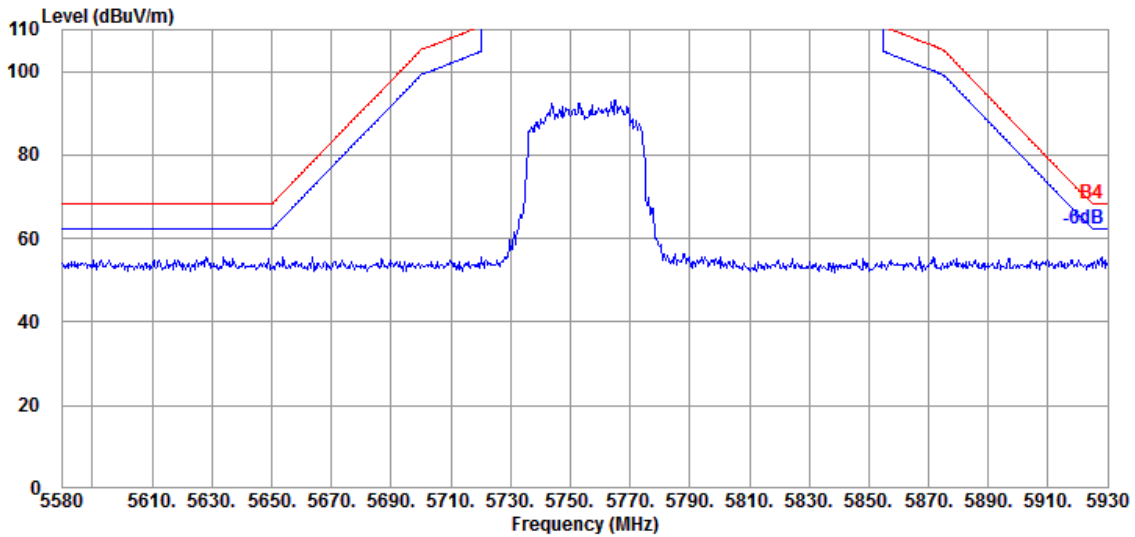


Antenna at Vertical Polarization

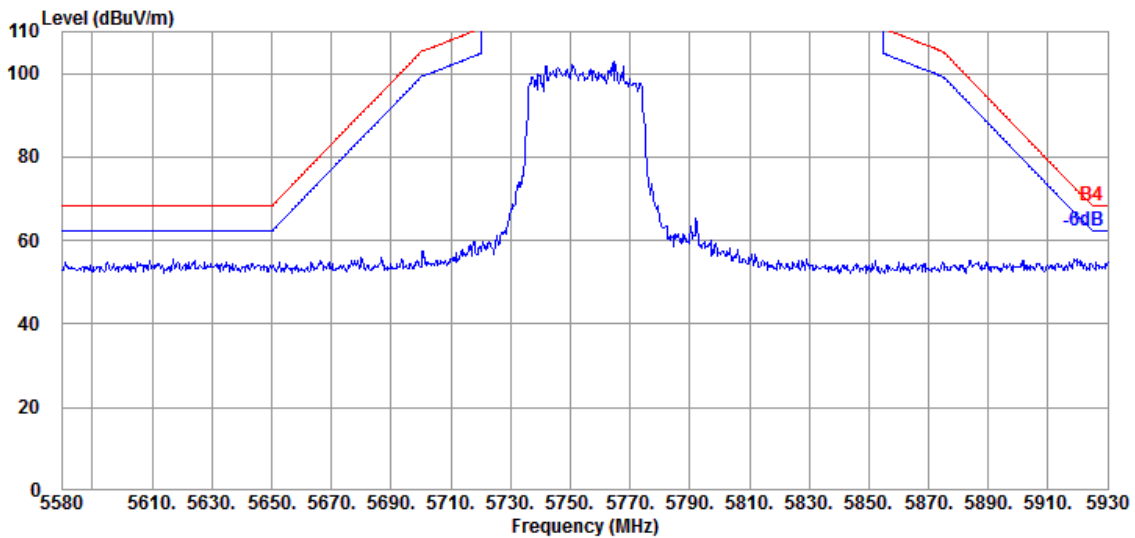


Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

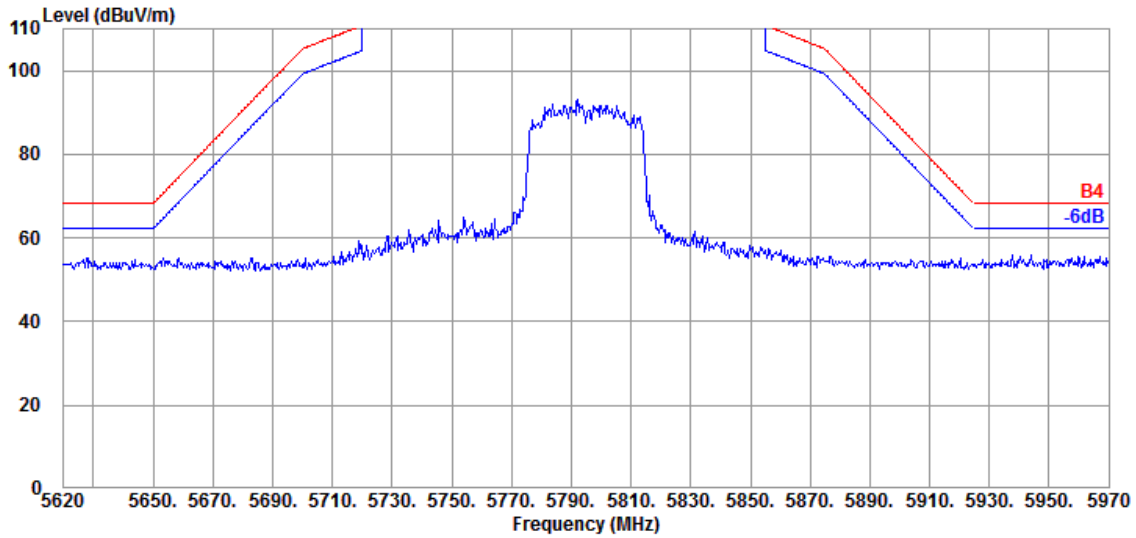

Antenna at Vertical Polarization

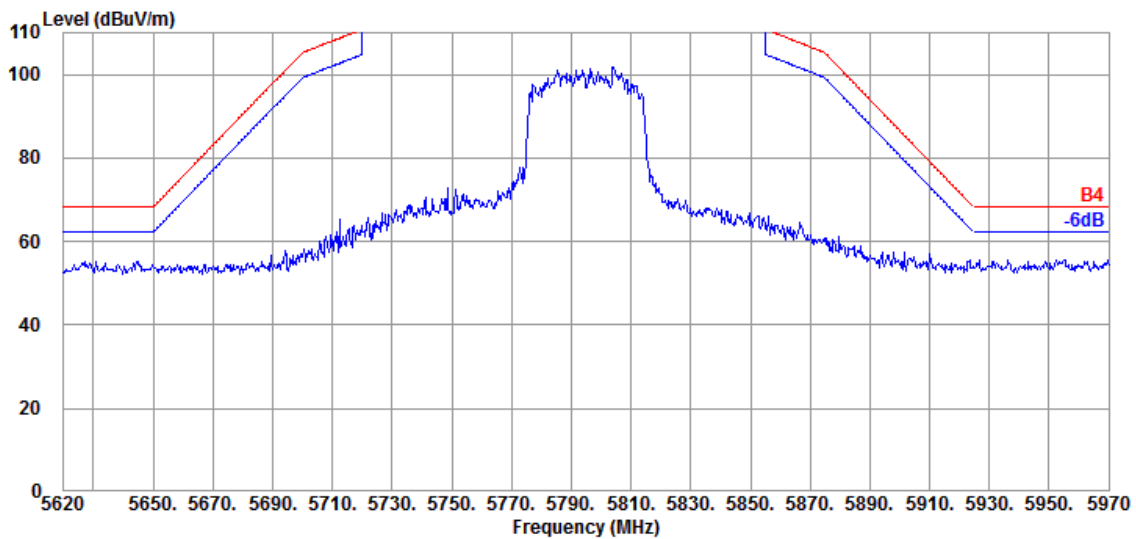


Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

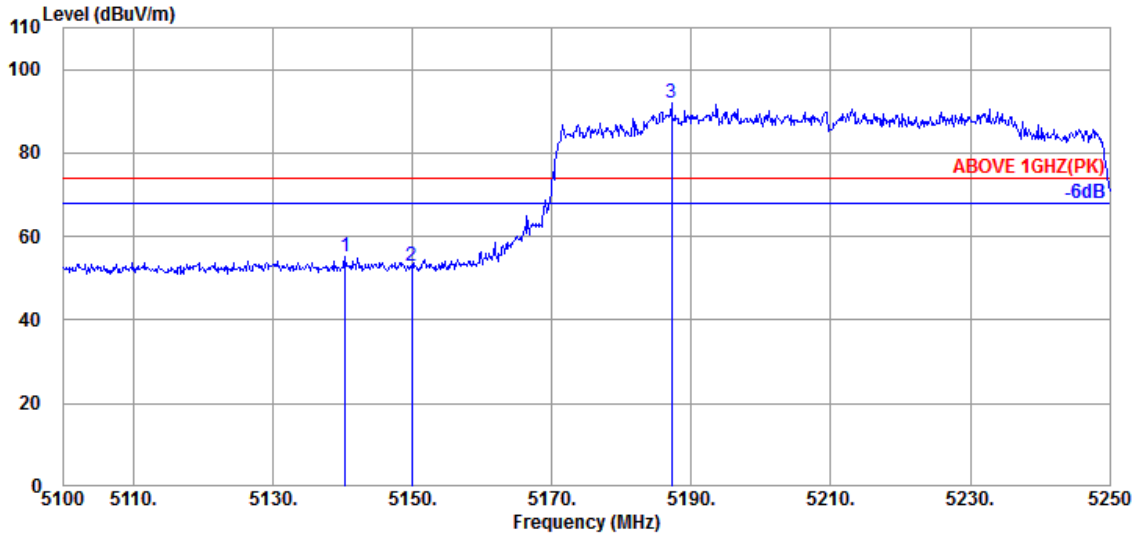

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.350	34.03	8.39	39.21	51.93	55.14	74.00	18.86	Peak
5149.950	34.10	8.39	39.21	49.63	52.91	74.00	21.09	Peak
@ 5187.150	34.30	8.41	39.21	88.40	91.90	---	---	Peak

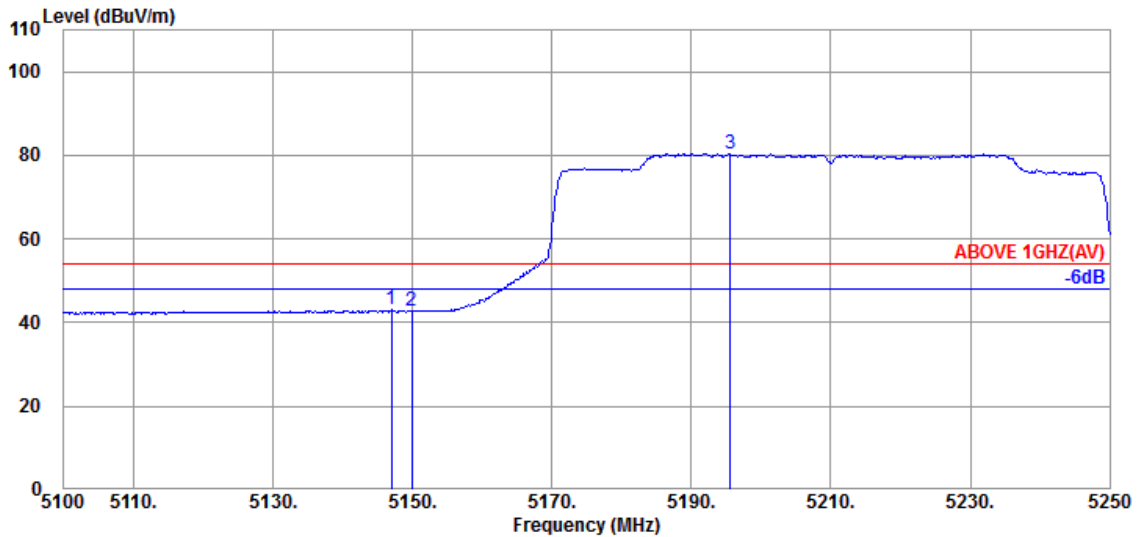


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.950	34.10	8.39	39.21	39.76	43.04	54.00	10.96	Average
5149.950	34.10	8.39	39.21	39.56	42.84	54.00	11.16	Average
@ 5195.550	34.30	8.43	39.21	76.80	80.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

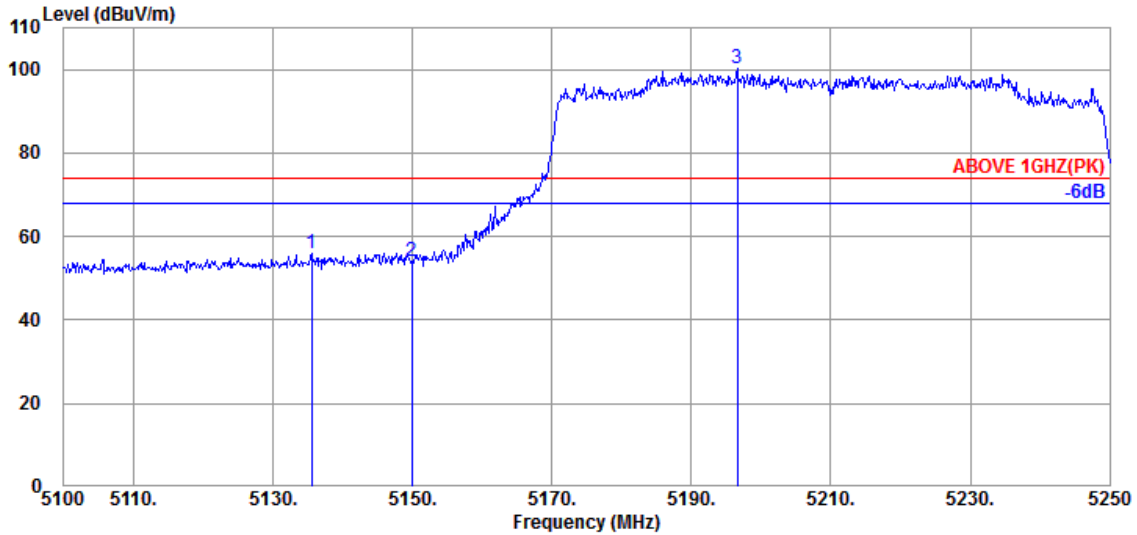

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.550	34.03	8.37	39.21	52.87	56.06	74.00	17.94	Peak
5149.950	34.10	8.39	39.21	50.62	53.90	74.00	20.10	Peak
@ 5196.600	34.30	8.43	39.21	96.54	100.06	---	---	Peak

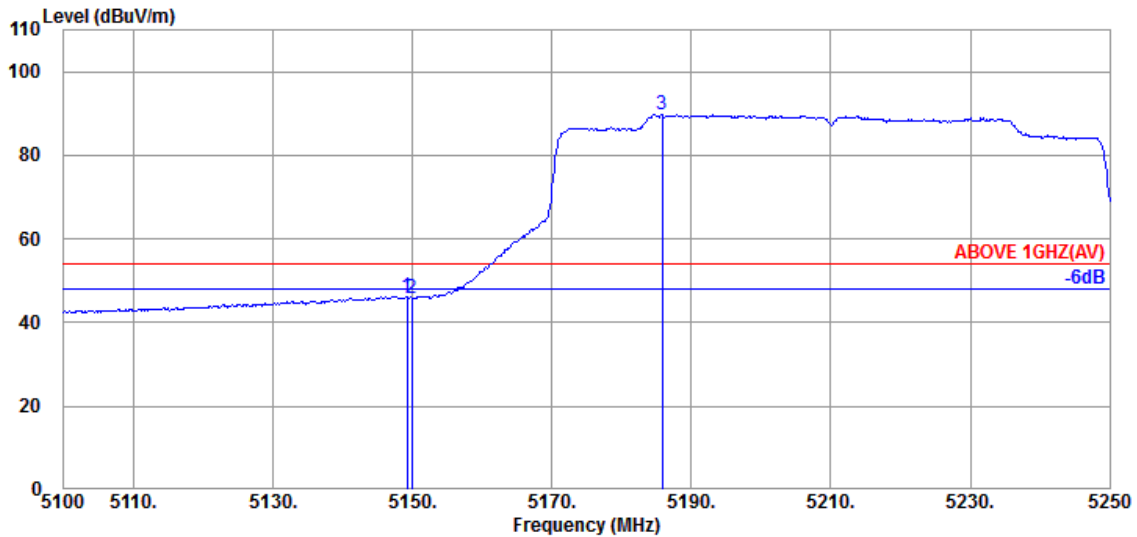


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.10	8.39	39.21	42.92	46.20	54.00	7.80	Average
5149.950	34.10	8.39	39.21	42.69	45.97	54.00	8.03	Average
@ 5185.800	34.23	8.41	39.21	86.39	89.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

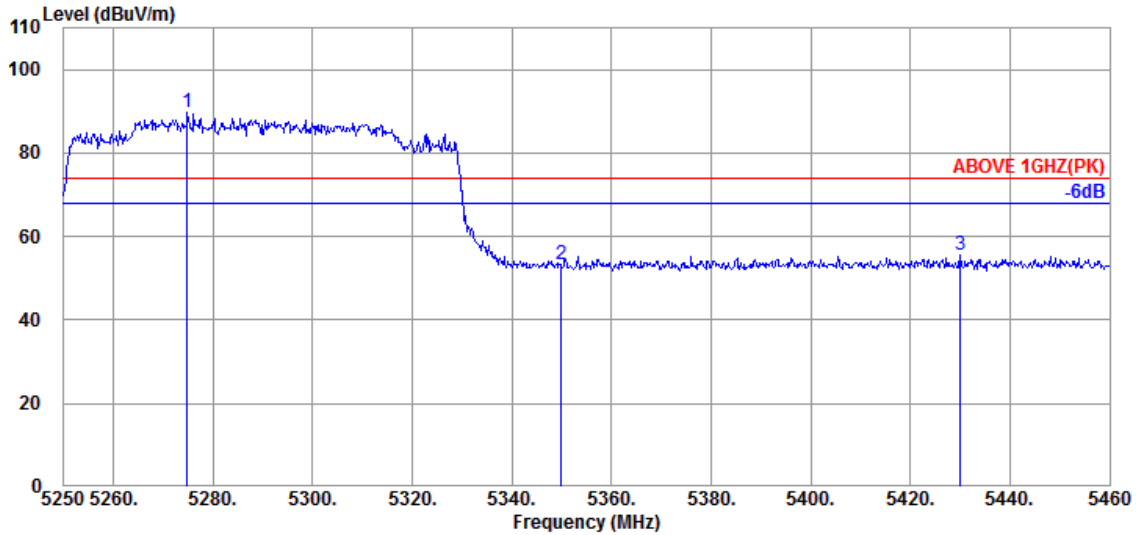

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.780	34.50	8.49	39.20	86.08	89.87	---	---	Peak
5349.960	34.60	8.56	39.19	49.29	53.26	74.00	20.74	Peak
5429.970	34.65	8.63	39.18	51.50	55.60	74.00	18.40	Peak

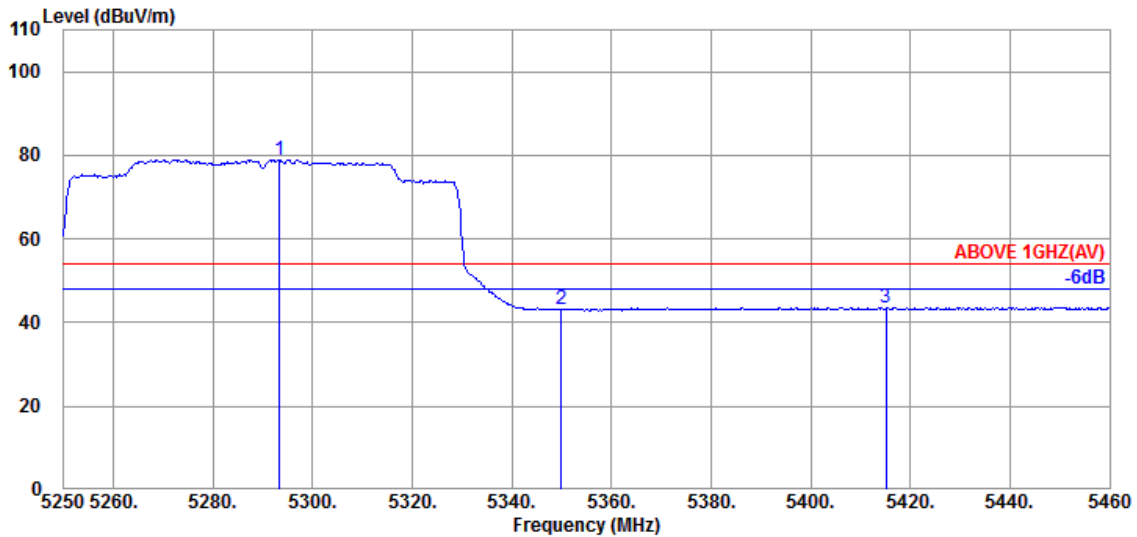


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.260	34.50	8.51	39.19	75.08	78.90	---	---	Average
5349.960	34.60	8.56	39.19	39.11	43.08	54.00	10.92	Average
5415.060	34.67	8.61	39.18	39.52	43.62	54.00	10.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

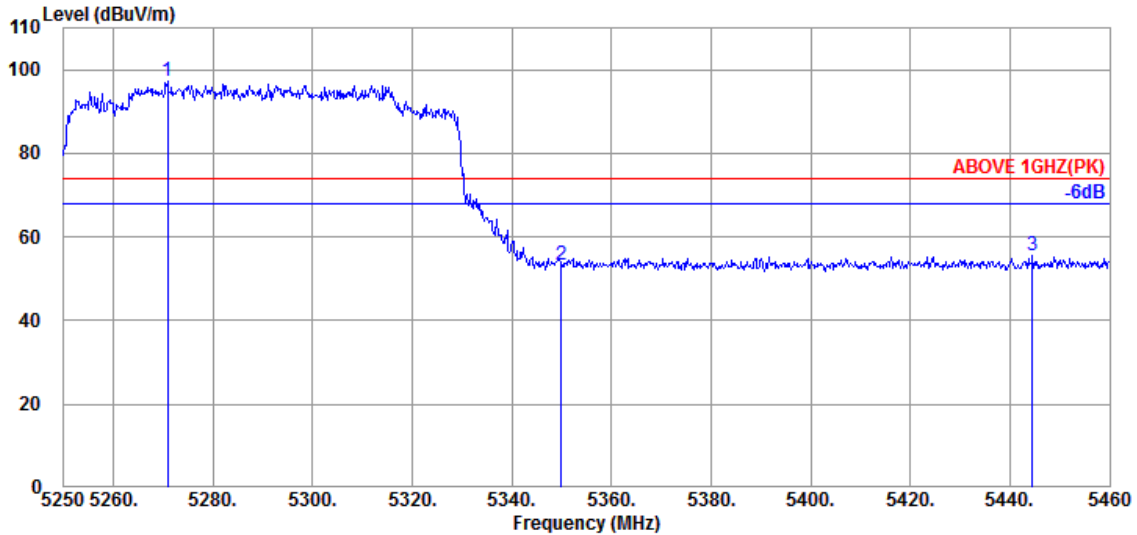

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.790	34.50	8.49	39.20	93.52	97.31	---	---	Peak
5349.960	34.60	8.56	39.19	49.48	53.45	74.00	20.55	Peak
5444.460	34.62	8.63	39.18	51.56	55.63	74.00	18.37	Peak

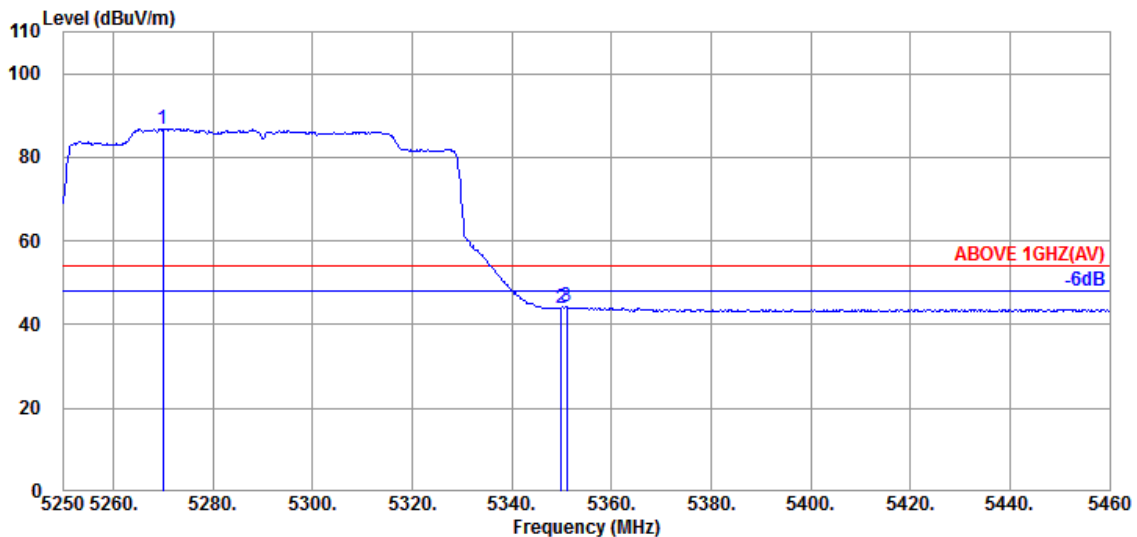


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.950	34.50	8.49	39.20	83.00	86.79	---	---	Average
5349.960	34.60	8.56	39.19	39.90	43.87	54.00	10.13	Average
5351.010	34.60	8.56	39.19	40.18	44.15	54.00	9.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

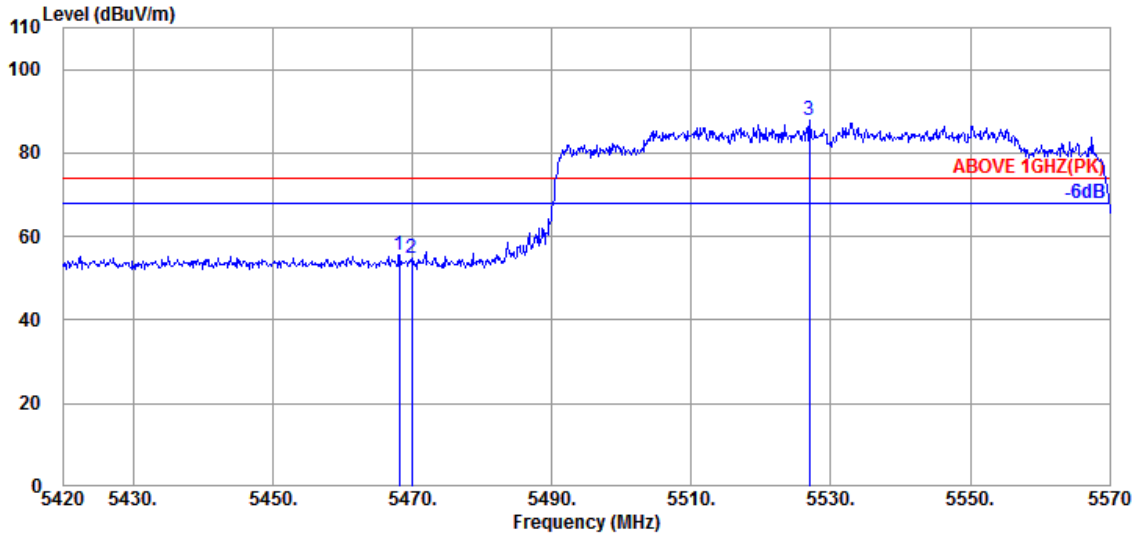

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	34.57	8.65	39.17	51.43	55.48	74.00	18.52	Peak
5469.950	34.57	8.65	39.17	50.91	54.96	74.00	19.04	Peak
@ 5526.950	34.53	8.70	39.18	83.94	87.99	---	---	Peak

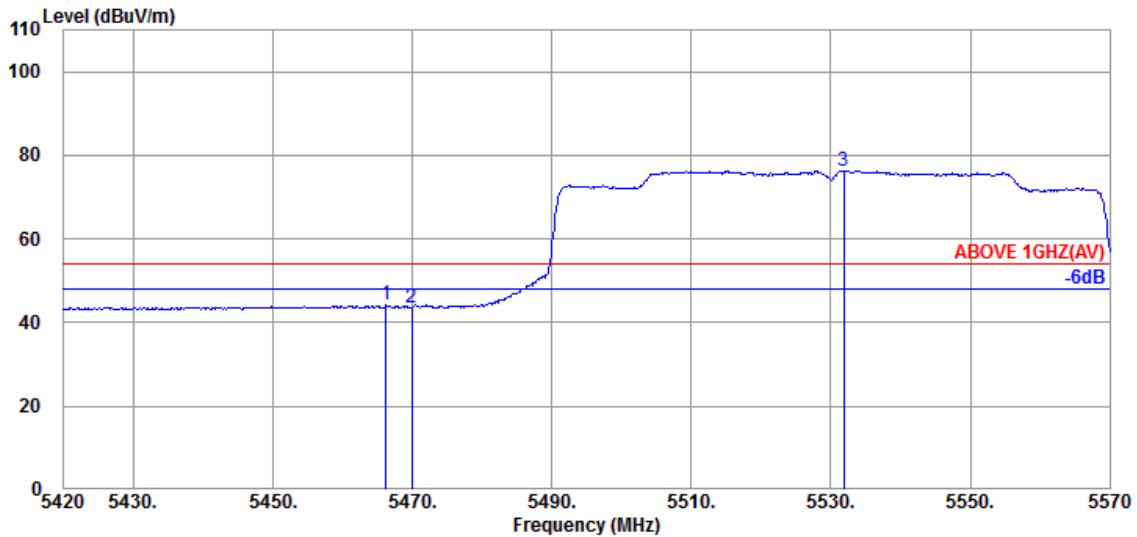


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.57	8.65	39.17	40.07	44.12	54.00	9.88	Average
5469.950	34.57	8.65	39.17	39.68	43.73	54.00	10.27	Average
@ 5531.900	34.57	8.71	39.18	72.23	76.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

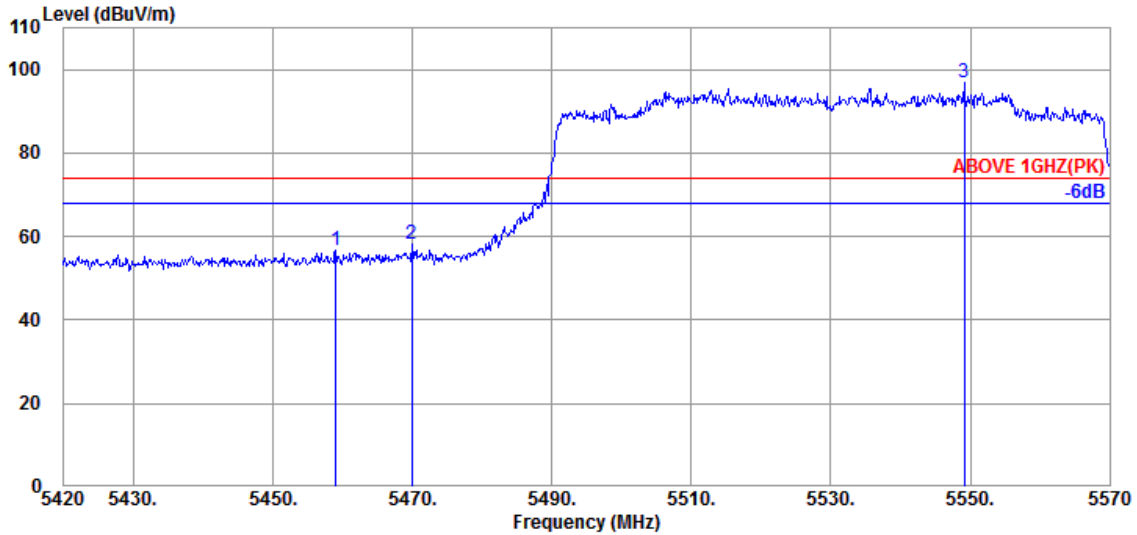

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.60	8.64	39.17	52.61	56.68	74.00	17.32	Peak
5469.950	34.57	8.65	39.17	54.17	58.22	74.00	15.78	Peak
@ 5549.150	34.60	8.72	39.18	92.64	96.78	---	---	Peak

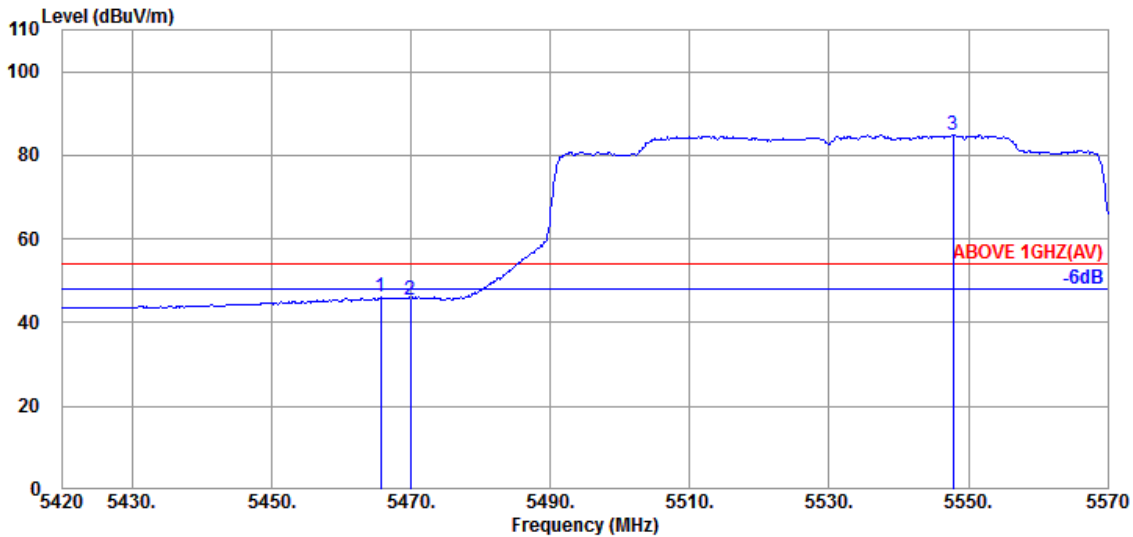


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.57	8.65	39.17	42.13	46.18	54.00	7.82	Average
5469.950	34.57	8.65	39.17	41.54	45.59	54.00	8.41	Average
@ 5547.800	34.60	8.72	39.18	80.86	85.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5610MHz

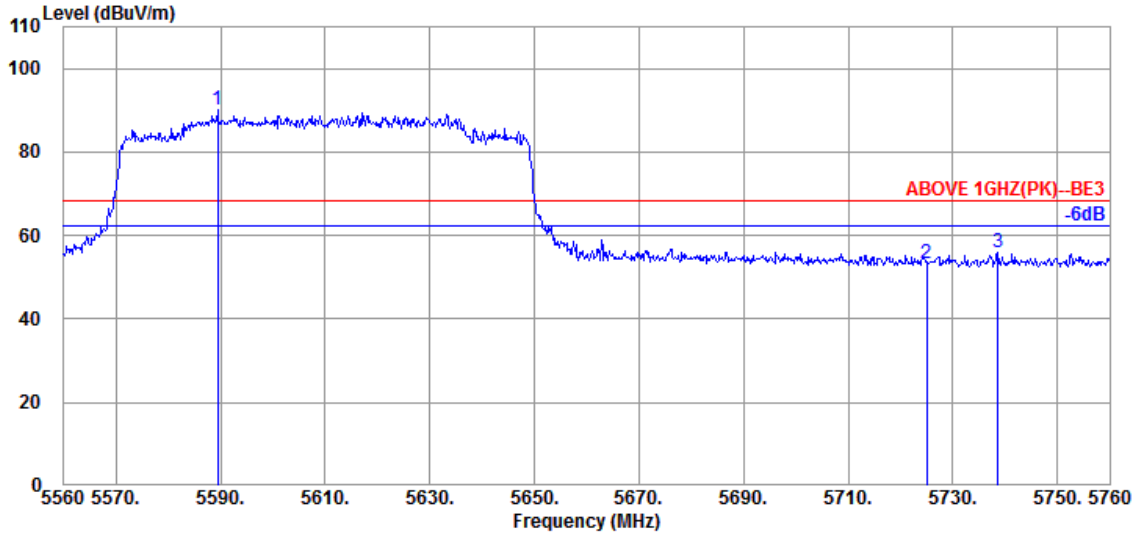

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.400	34.60	8.75	39.19	86.12	90.28	---	---	Peak
5725.000	34.50	8.86	39.23	49.11	53.24	68.20	14.96	Peak
5738.600	34.50	8.88	39.23	51.81	55.96	68.20	12.24	Peak

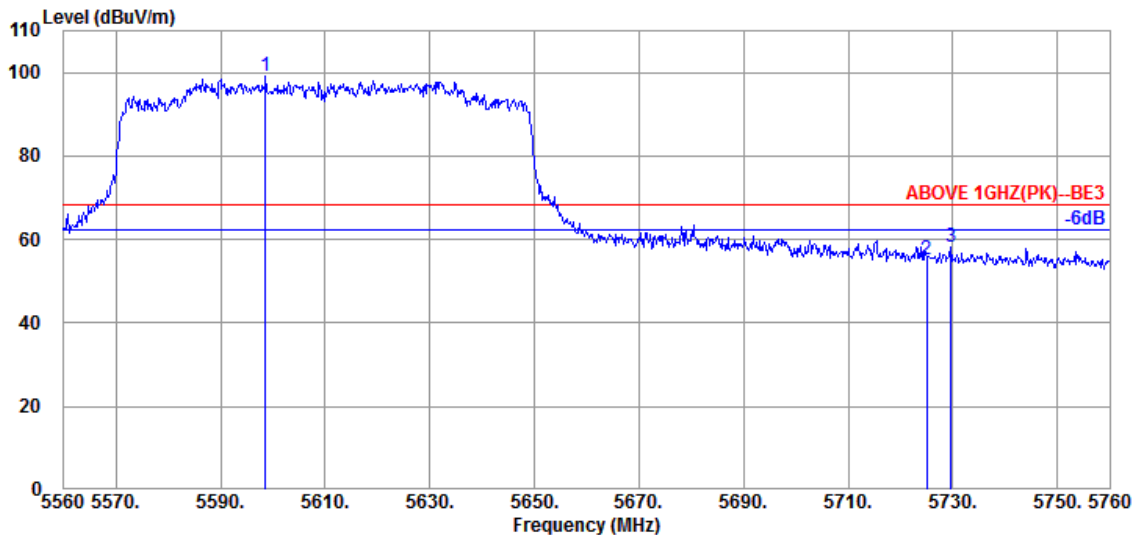


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5598.600	34.60	8.77	39.20	95.03	99.20	---	---	Peak
5725.000	34.50	8.86	39.23	51.21	55.34	68.20	12.86	Peak
5729.600	34.50	8.86	39.23	53.98	58.11	68.20	10.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

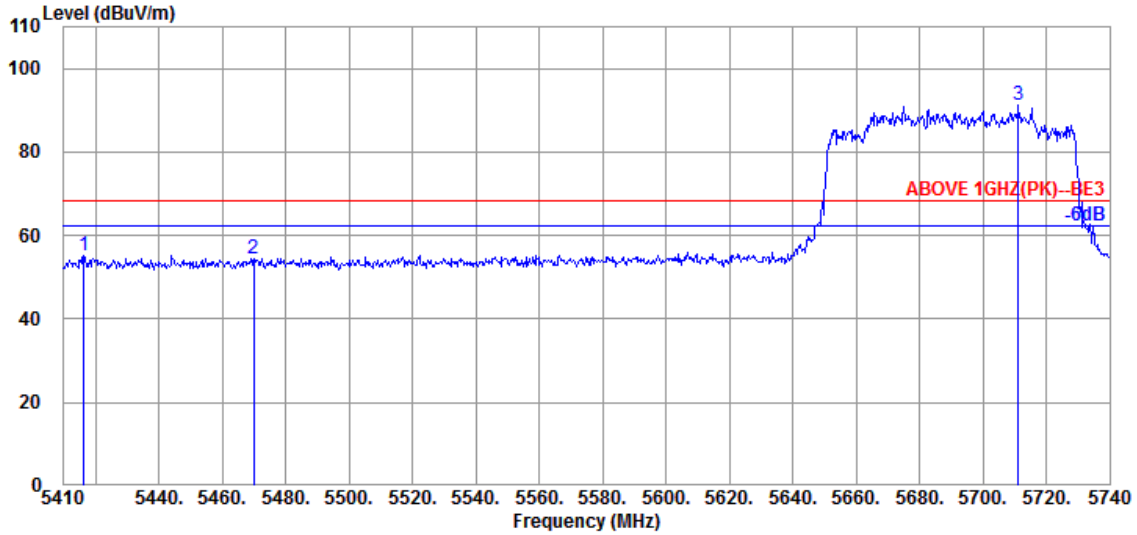

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.270	34.67	8.61	39.18	50.99	55.09	68.20	13.11	Peak
5470.060	34.57	8.65	39.17	50.31	54.36	68.20	13.84	Peak
@ 5711.290	34.50	8.85	39.23	87.04	91.16	---	---	Peak

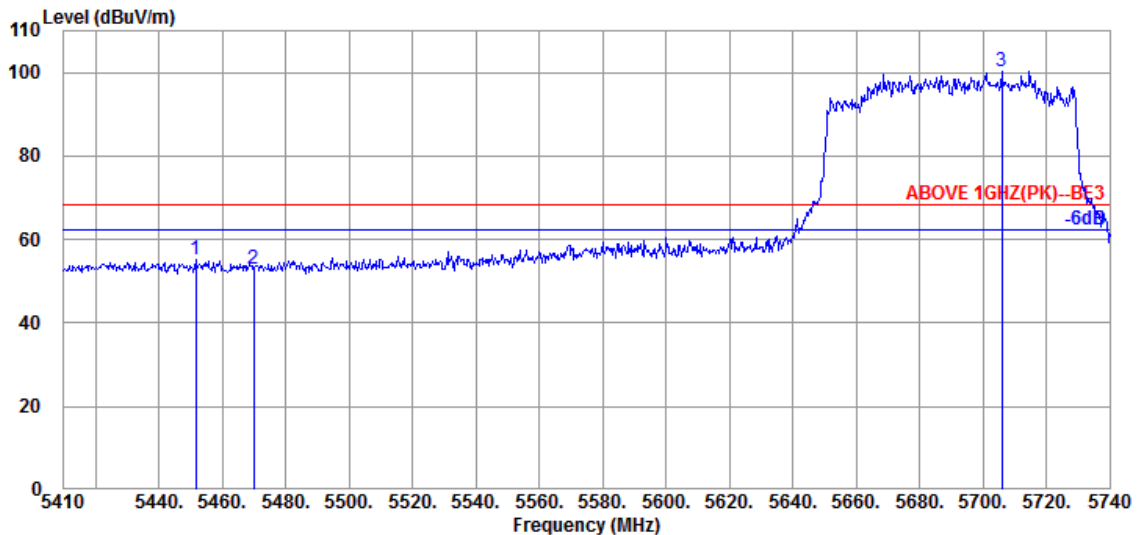


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.580	34.60	8.64	39.18	51.01	55.07	68.20	13.13	Peak
5470.060	34.57	8.65	39.17	48.77	52.82	68.20	15.38	Peak
@ 5706.010	34.50	8.85	39.22	96.18	100.31	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

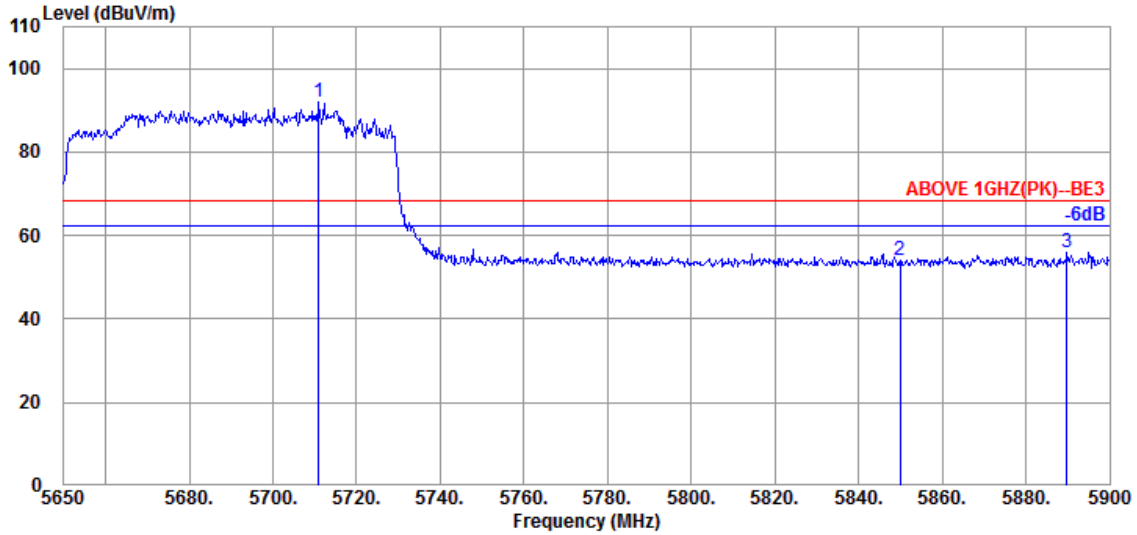

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.000	34.50	8.85	39.23	87.75	91.87	---	---	Peak
5850.000	34.40	8.96	39.26	50.12	54.22	68.20	13.98	Peak
5889.750	34.47	9.01	39.27	51.75	55.96	68.20	12.24	Peak

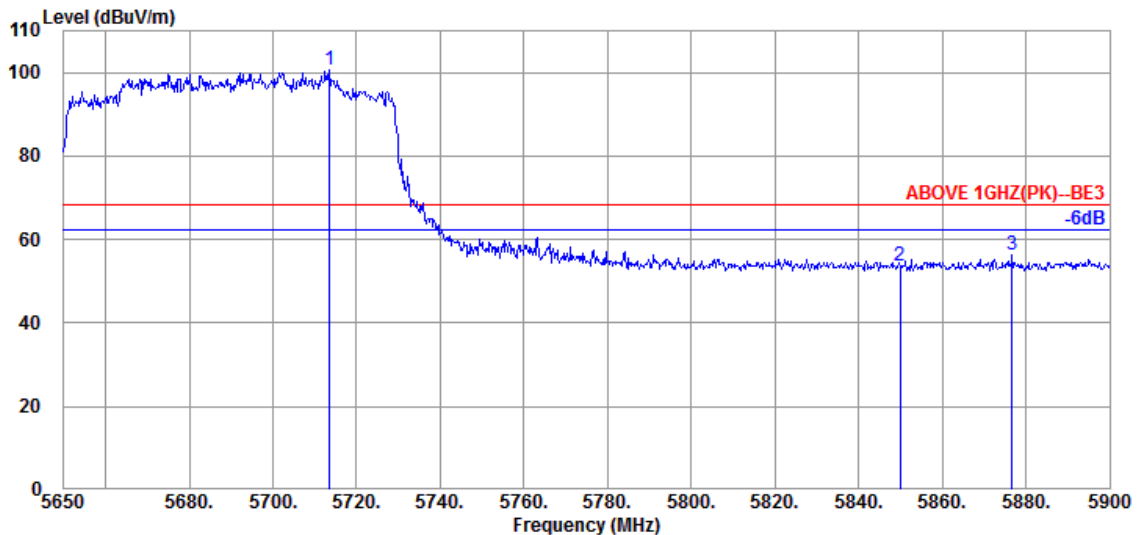


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.500	34.50	8.85	39.23	96.68	100.80	---	---	Peak
5850.000	34.40	8.96	39.26	49.41	53.51	68.20	14.69	Peak
5876.750	34.47	8.99	39.27	52.22	56.41	68.20	11.79	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

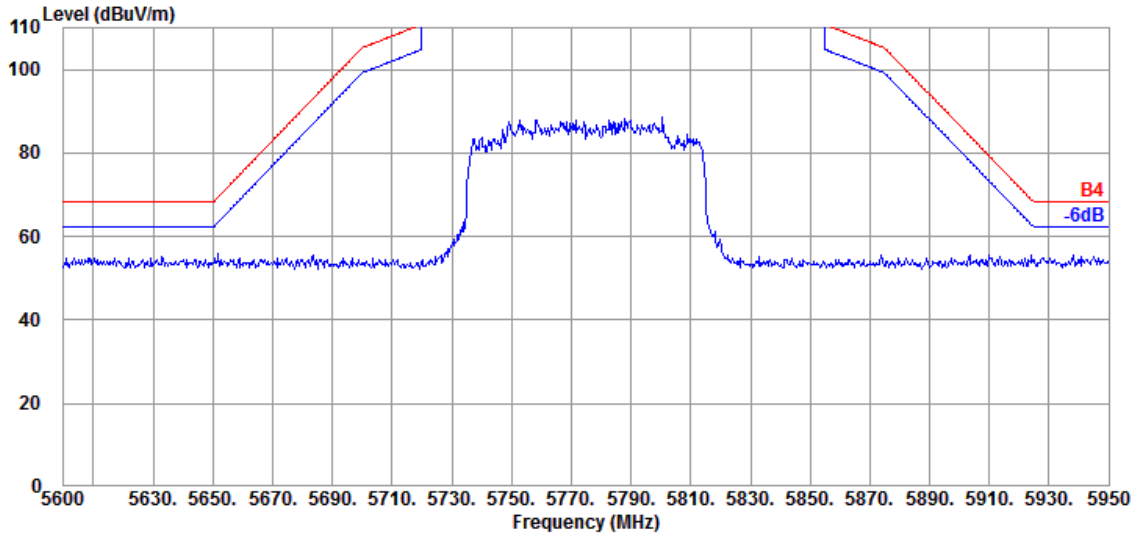


Antenna at Vertical Polarization

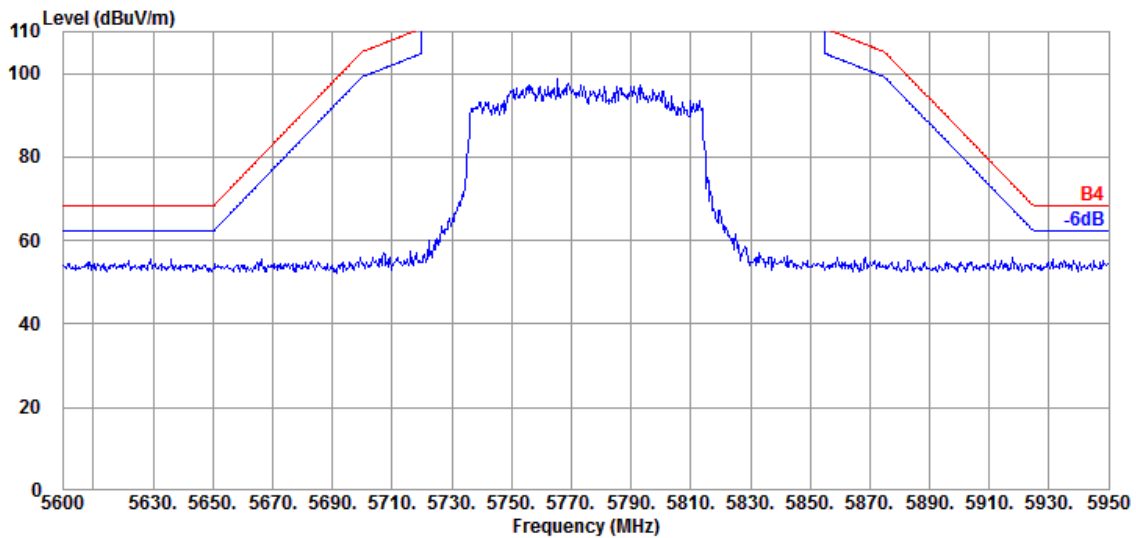




Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

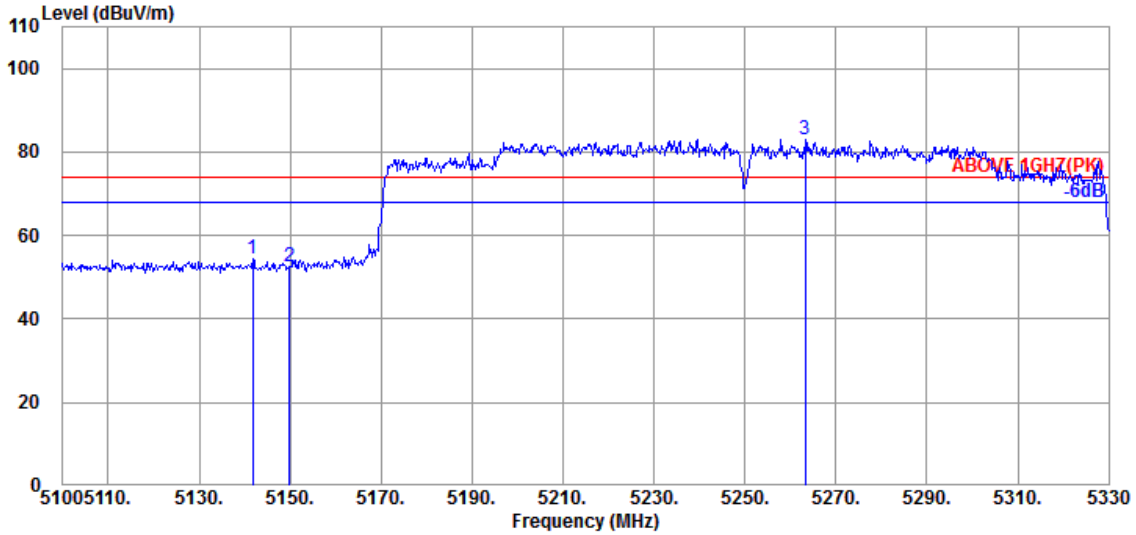

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.860	34.10	8.39	39.21	51.15	54.43	74.00	19.57	Peak
5149.910	34.10	8.39	39.21	49.26	52.54	74.00	21.46	Peak
@ 5263.300	34.50	8.49	39.20	79.24	83.03	---	---	Peak

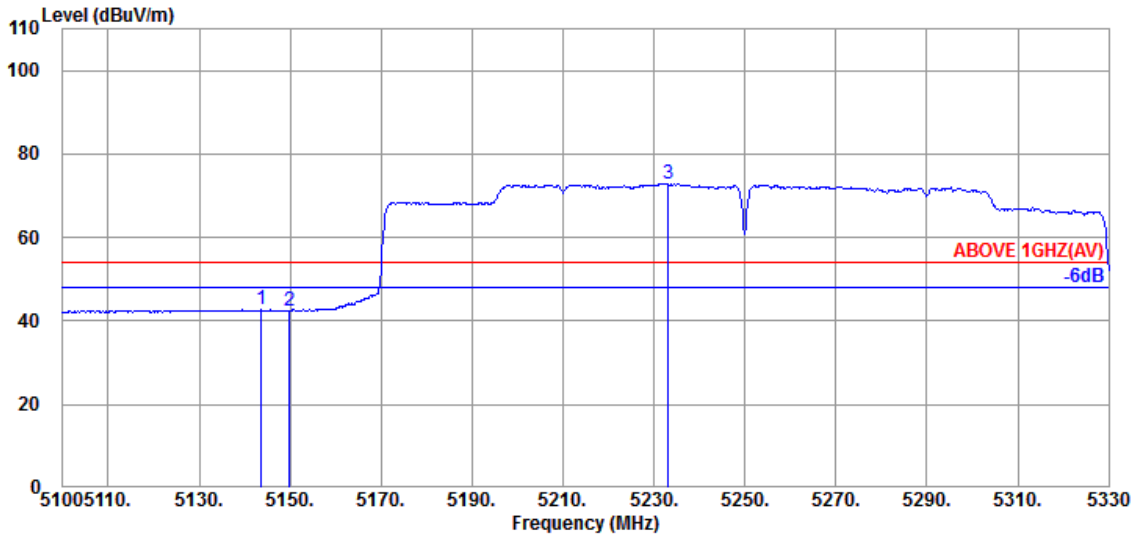


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.700	34.10	8.39	39.21	39.43	42.71	54.00	11.29	Average
5149.910	34.10	8.39	39.21	39.08	42.36	54.00	11.64	Average
@ 5233.170	34.45	8.46	39.20	69.21	72.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

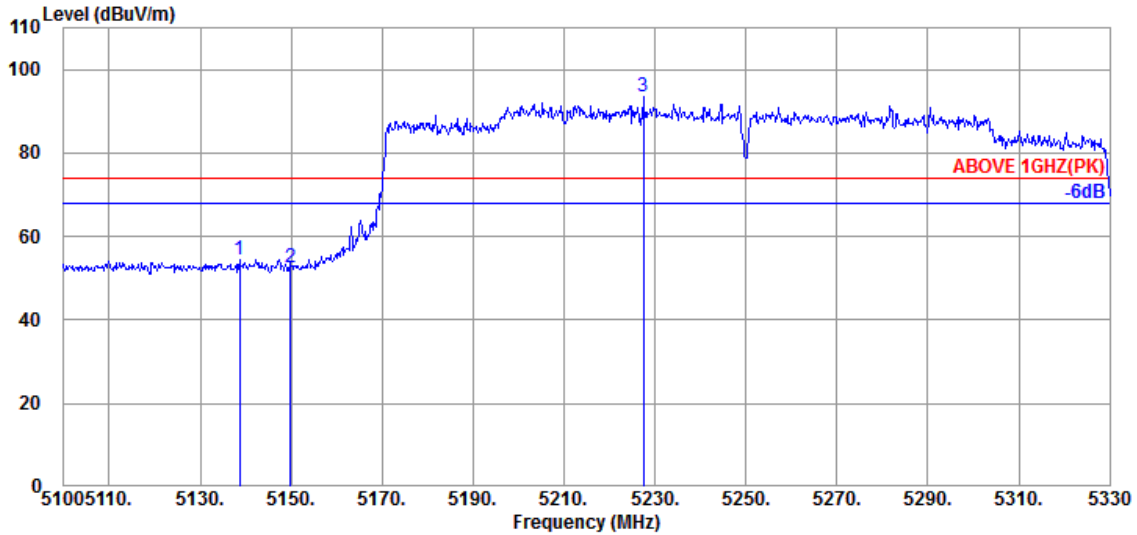

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.640	34.03	8.37	39.21	51.28	54.47	74.00	19.53	Peak
5149.910	34.10	8.39	39.21	49.27	52.55	74.00	21.45	Peak
@ 5227.420	34.40	8.46	39.20	89.64	93.30	---	---	Peak

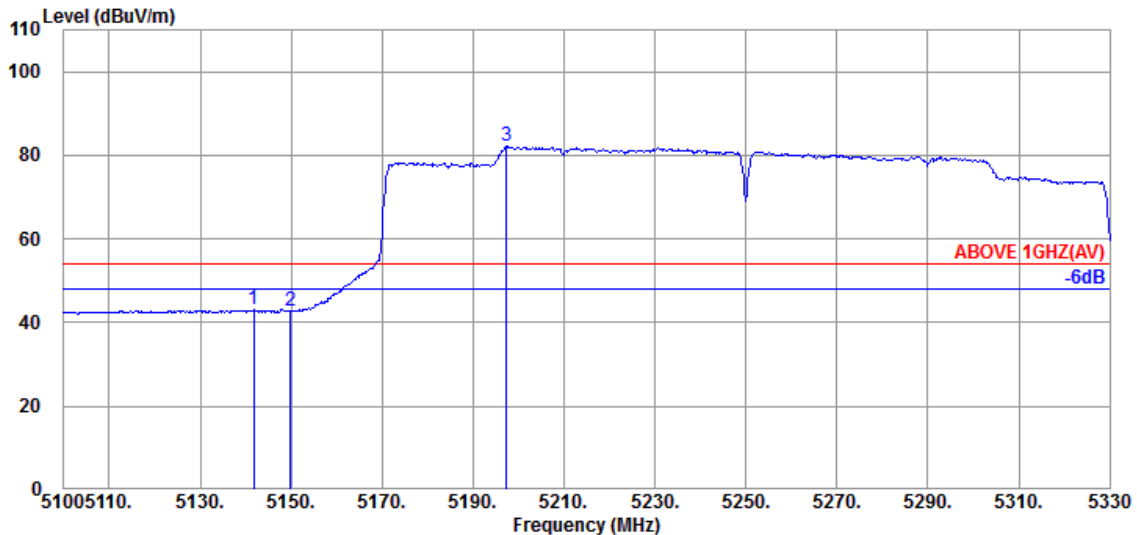


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.860	34.10	8.39	39.21	39.74	43.02	54.00	10.98	Average
5149.910	34.10	8.39	39.21	39.45	42.73	54.00	11.27	Average
@ 5197.290	34.30	8.43	39.21	78.68	82.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

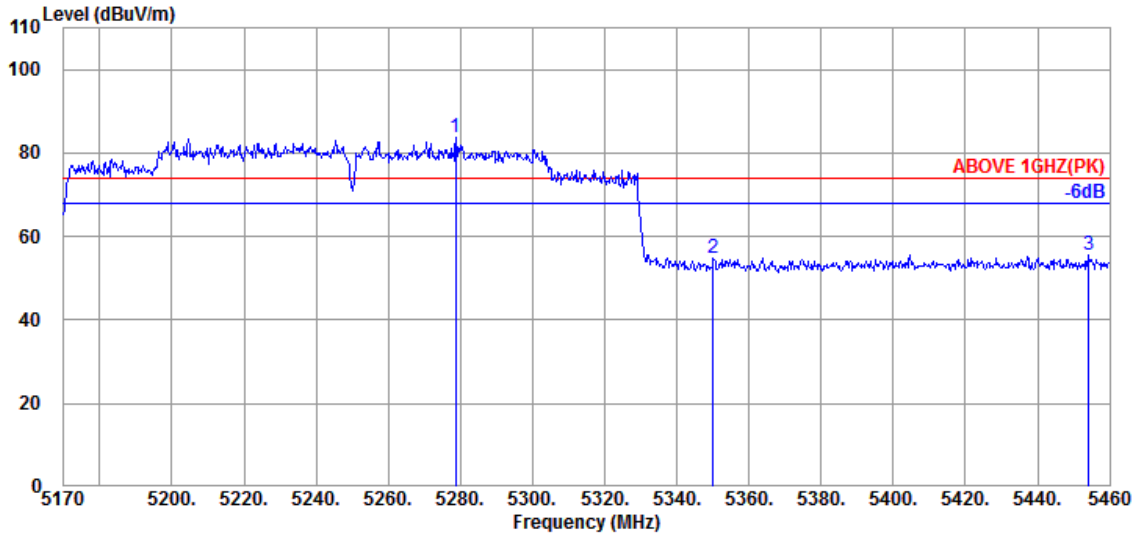

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.750	34.50	8.50	39.19	79.91	83.72	---	---	Peak
5350.090	34.60	8.56	39.19	50.75	54.72	74.00	19.28	Peak
5454.200	34.60	8.64	39.17	51.35	55.42	74.00	18.58	Peak

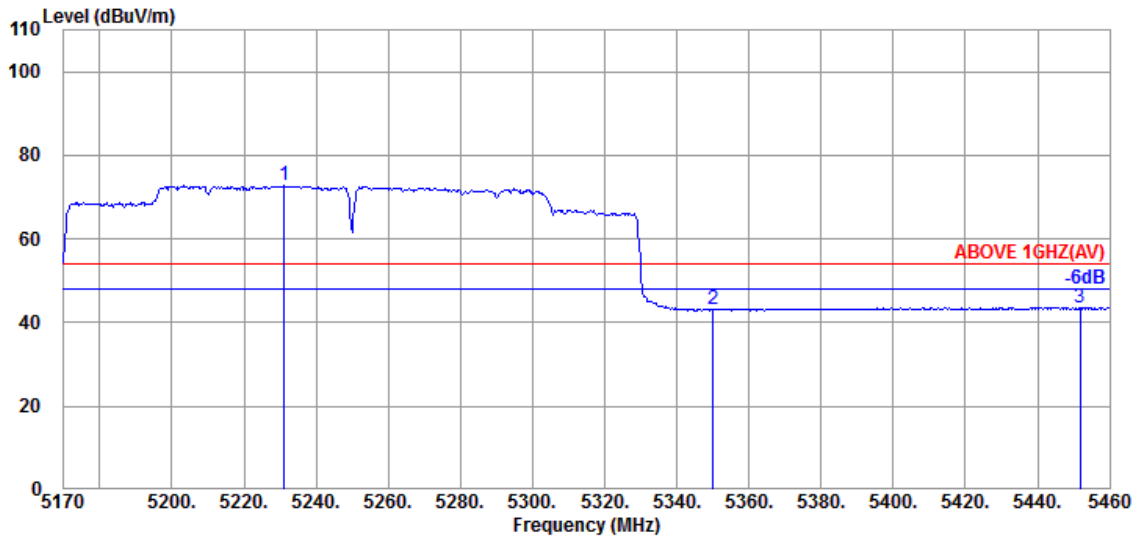


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.190	34.40	8.46	39.20	69.01	72.67	---	---	Average
5350.090	34.60	8.56	39.19	39.04	43.01	54.00	10.99	Average
5451.880	34.60	8.64	39.17	39.63	43.70	54.00	10.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

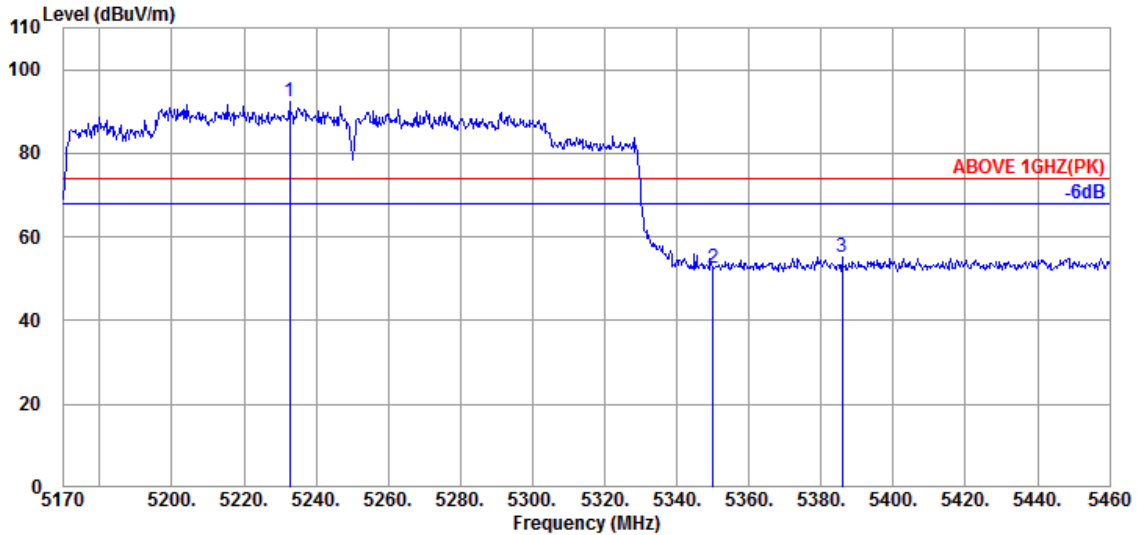

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5232.640	34.45	8.46	39.20	88.79	92.50	---	---	Peak
5350.090	34.60	8.56	39.19	48.75	52.72	74.00	21.28	Peak
5385.760	34.70	8.58	39.18	51.02	55.12	74.00	18.88	Peak

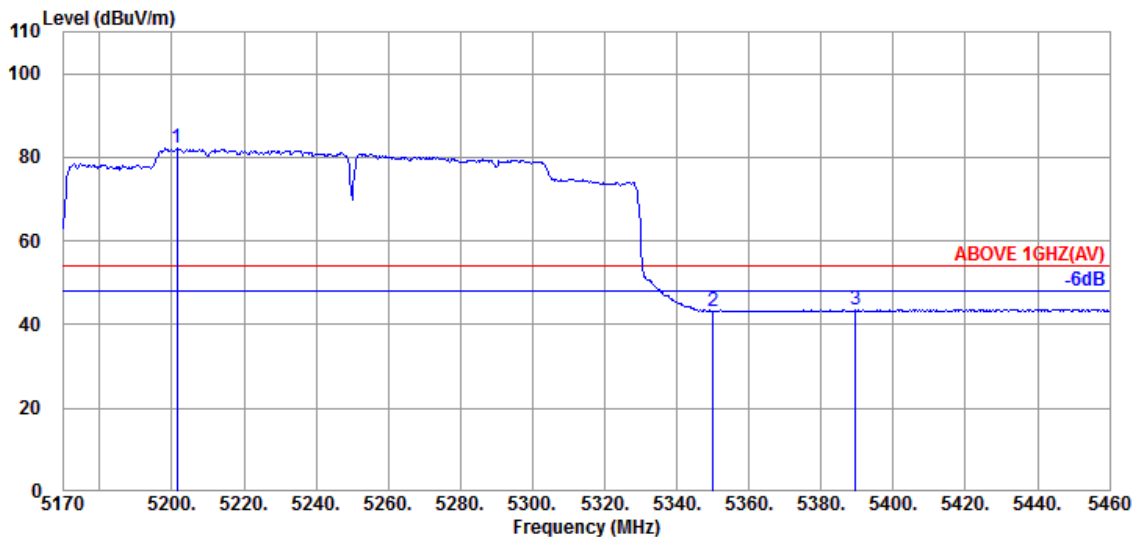


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5201.320	34.30	8.43	39.21	78.63	82.15	---	---	Average
5350.090	34.60	8.56	39.19	39.28	43.25	54.00	10.75	Average
5389.530	34.70	8.58	39.18	39.58	43.68	54.00	10.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

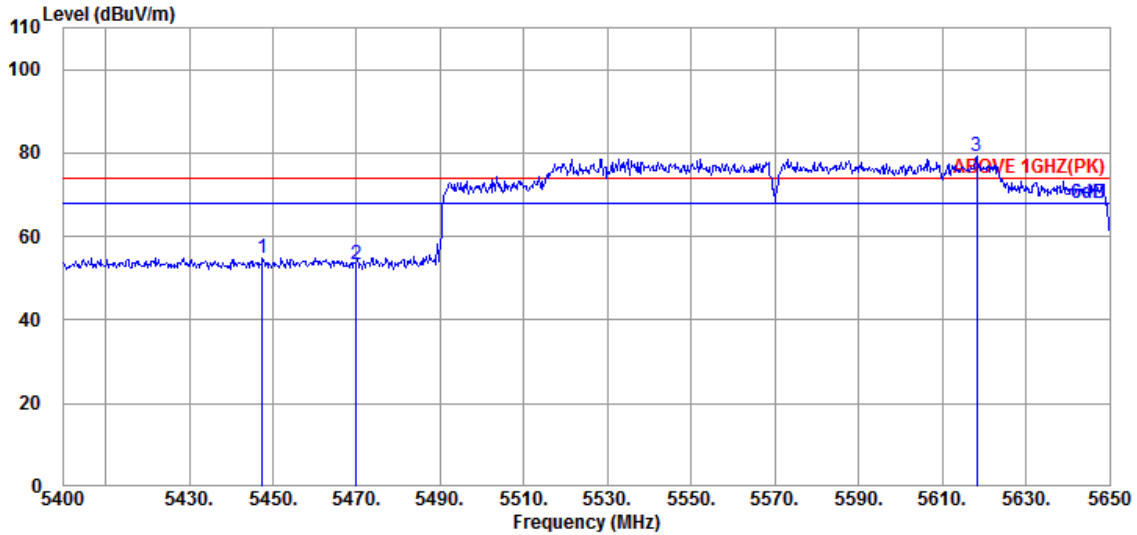

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.500	34.62	8.64	39.18	50.78	54.86	74.00	19.14	Peak
5470.000	34.57	8.65	39.17	49.08	53.13	74.00	20.87	Peak
@ 5618.250	34.60	8.78	39.20	74.91	79.09	---	---	Peak

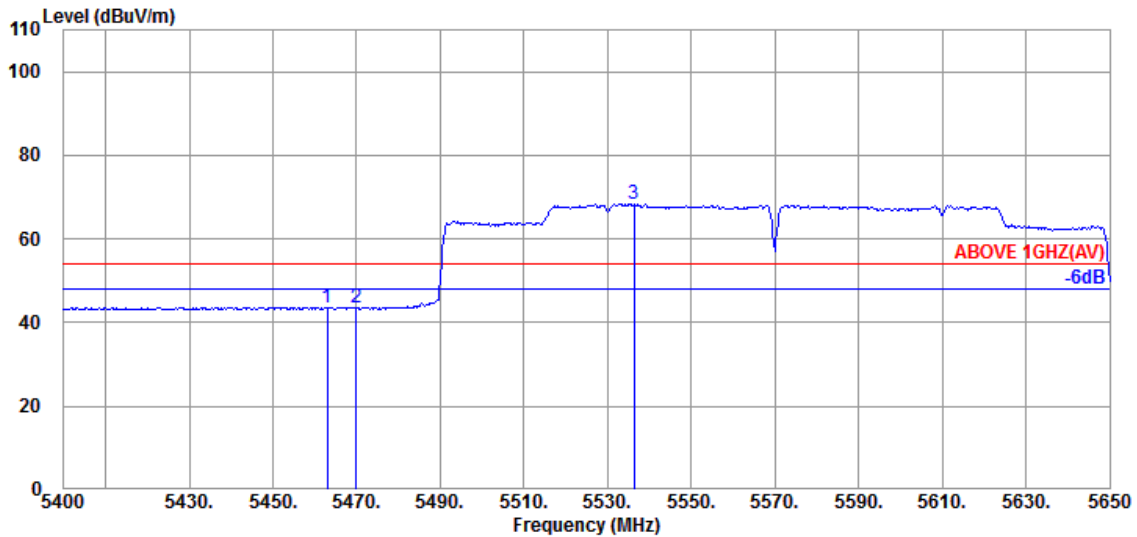


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.000	34.60	8.65	39.17	39.52	43.60	54.00	10.40	Average
5470.000	34.57	8.65	39.17	39.35	43.40	54.00	10.60	Average
@ 5536.250	34.57	8.71	39.18	64.20	68.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

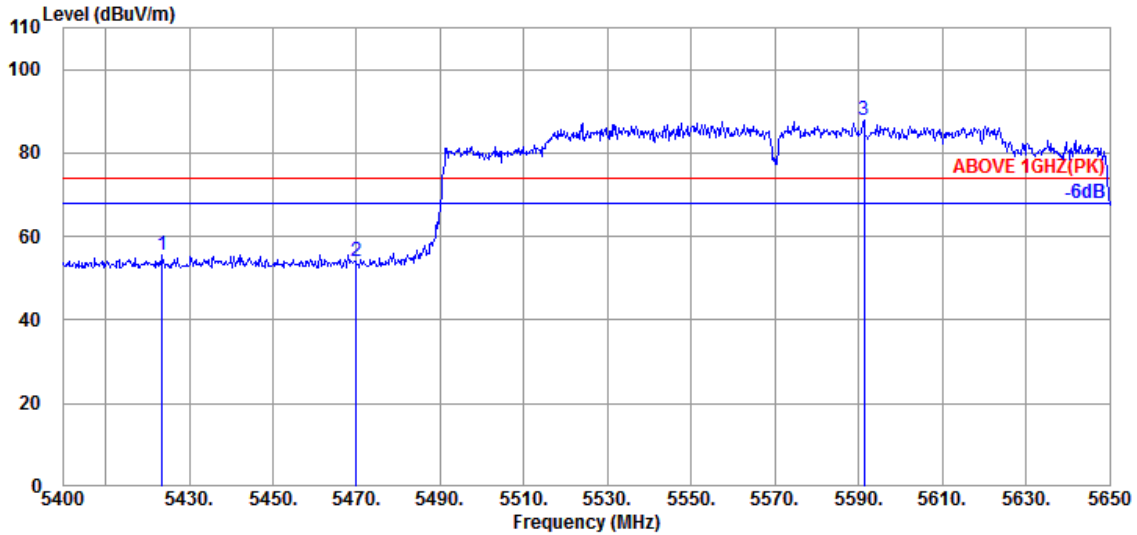

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.500	34.65	8.61	39.18	51.55	55.63	74.00	18.37	Peak
5470.000	34.57	8.65	39.17	49.99	54.04	74.00	19.96	Peak
@ 5591.250	34.60	8.75	39.19	83.64	87.80	---	---	Peak

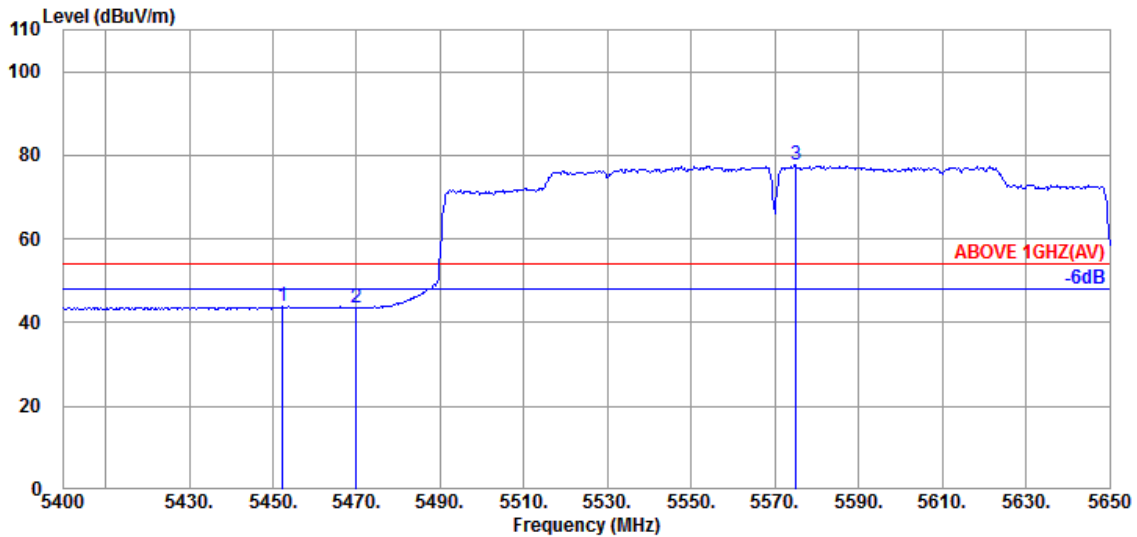


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.250	34.60	8.64	39.17	39.70	43.77	54.00	10.23	Average
5470.000	34.57	8.65	39.17	39.36	43.41	54.00	10.59	Average
@ 5575.000	34.60	8.74	39.19	73.42	77.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

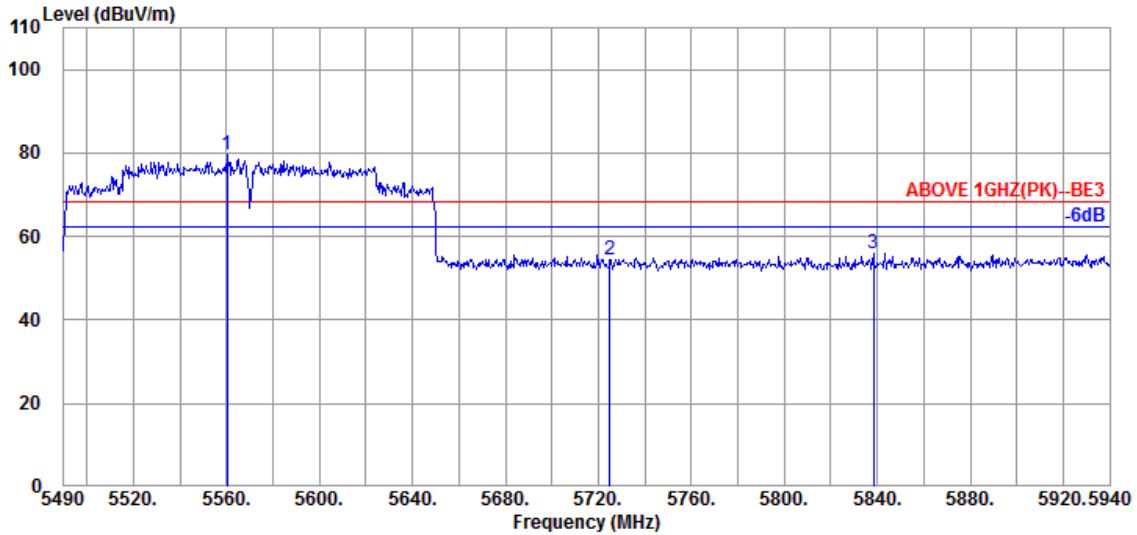

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5560.200	34.60	8.72	39.19	75.33	79.46	---	---	Peak
5724.900	34.50	8.86	39.23	50.49	54.62	68.20	13.58	Peak
5838.300	34.40	8.96	39.26	51.78	55.88	68.20	12.32	Peak

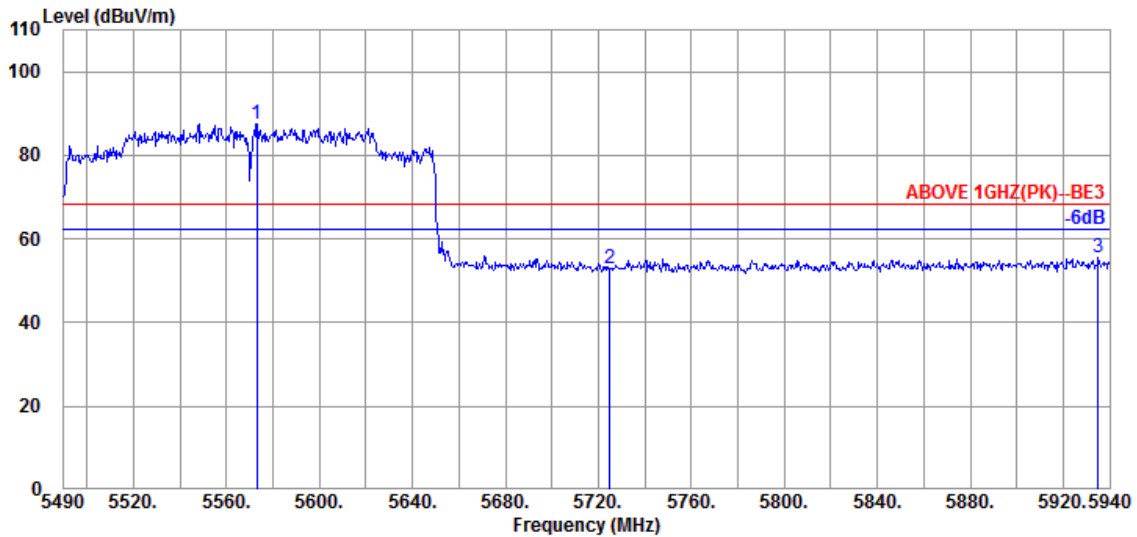


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5573.250	34.60	8.74	39.19	83.41	87.56	---	---	Peak
5724.900	34.50	8.86	39.23	48.67	52.80	68.20	15.40	Peak
5935.050	34.63	9.03	39.28	51.08	55.46	68.20	12.74	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

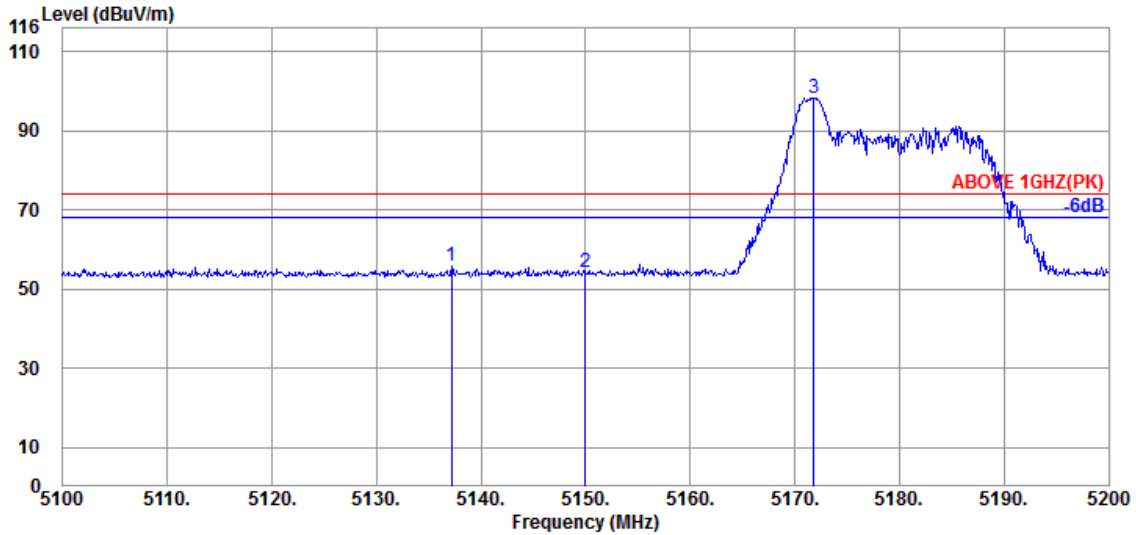

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.200	34.03	8.37	39.21	52.57	55.76	74.00	18.24	Peak
5150.000	34.10	8.39	39.21	50.96	54.24	74.00	19.76	Peak
@ 5171.800	34.23	8.40	39.21	94.85	98.27	---	---	Peak

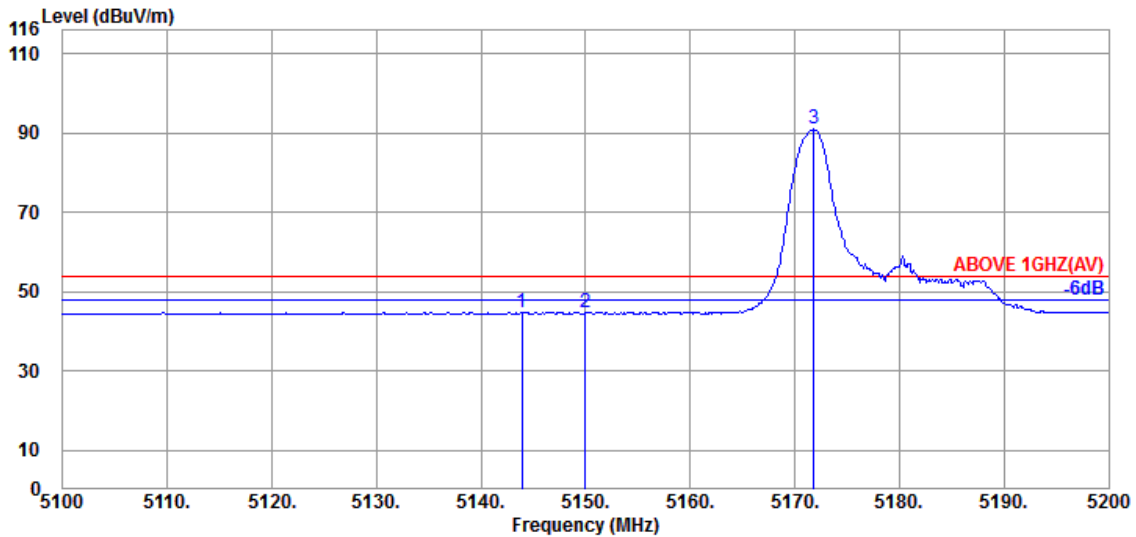


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.900	34.10	8.39	39.21	41.48	44.76	54.00	9.24	Average
5150.000	34.10	8.39	39.21	41.41	44.69	54.00	9.31	Average
@ 5171.800	34.23	8.40	39.21	87.52	90.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

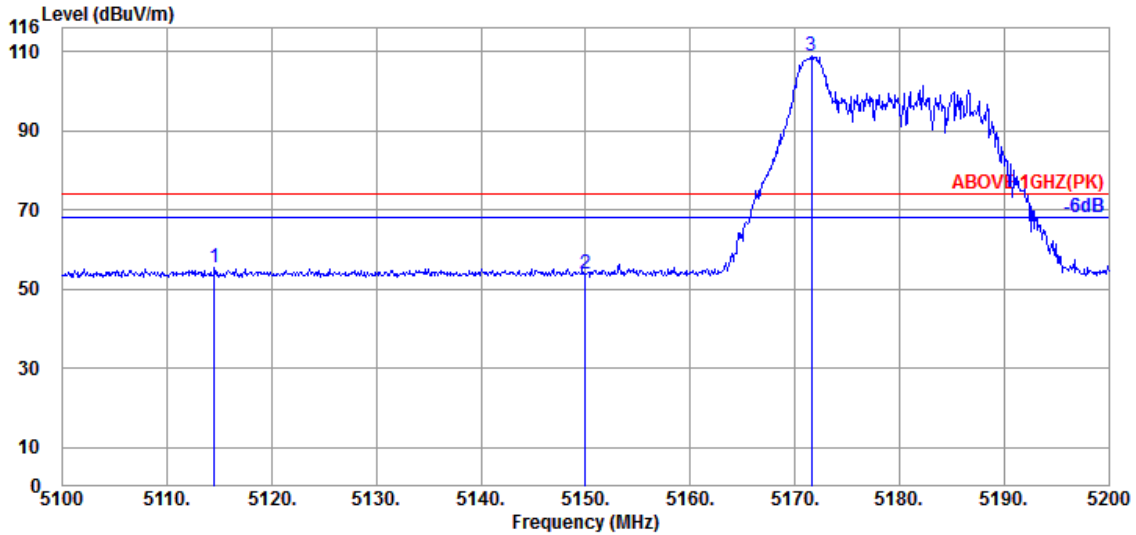

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.500	33.97	8.36	39.22	52.35	55.46	74.00	18.54	Peak
5150.000	34.10	8.39	39.21	50.76	54.04	74.00	19.96	Peak
@ 5171.600	34.23	8.40	39.21	105.37	108.79	---	---	Peak

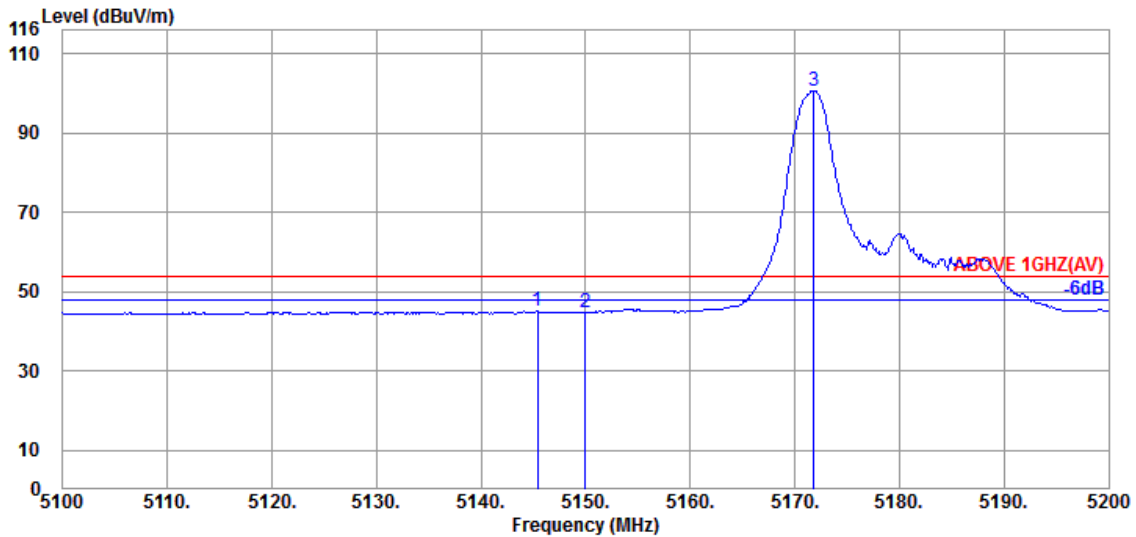


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	34.10	8.39	39.21	41.67	44.95	54.00	9.05	Average
5150.000	34.10	8.39	39.21	41.44	44.72	54.00	9.28	Average
@ 5171.800	34.23	8.40	39.21	97.31	100.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

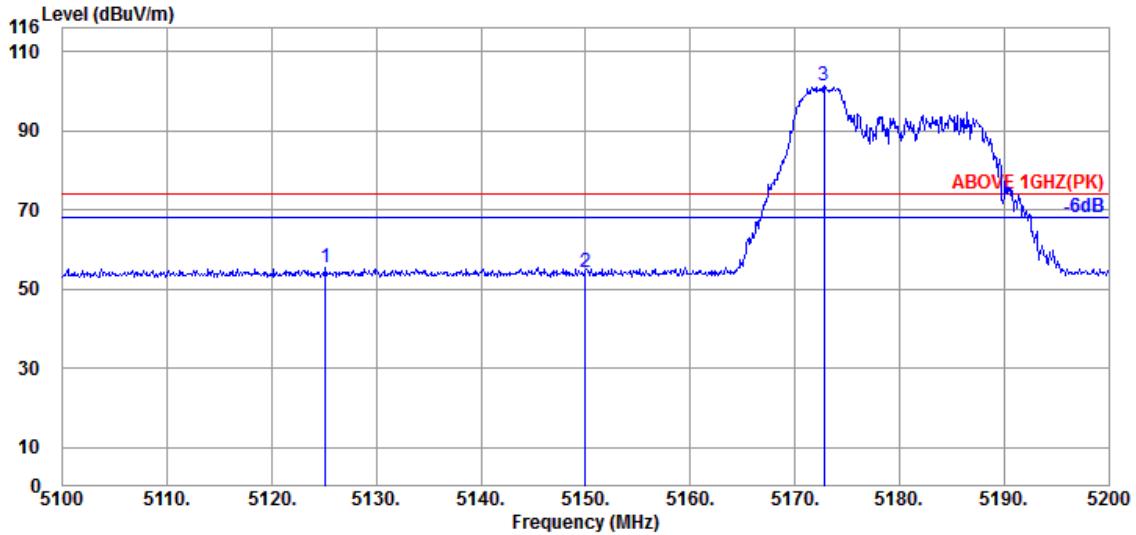

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.100	33.97	8.37	39.21	52.13	55.26	74.00	18.74	Peak
5150.000	34.10	8.39	39.21	51.10	54.38	74.00	19.62	Peak
@ 5172.800	34.23	8.40	39.21	97.82	101.24	---	---	Peak

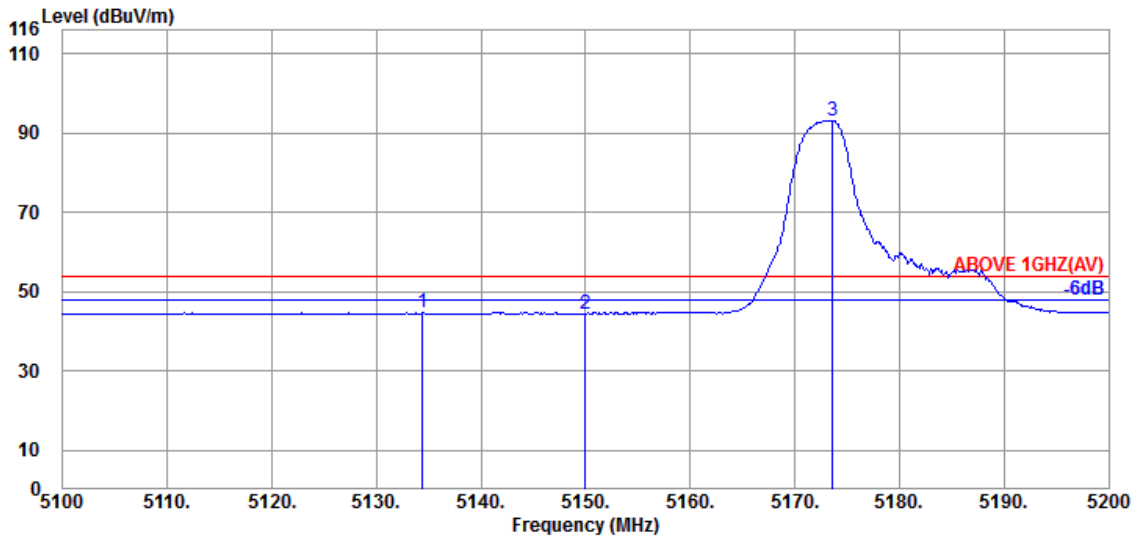


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.400	34.03	8.37	39.21	41.53	44.72	54.00	9.28	Average
5150.000	34.10	8.39	39.21	41.16	44.44	54.00	9.56	Average
@ 5173.600	34.23	8.41	39.21	89.67	93.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

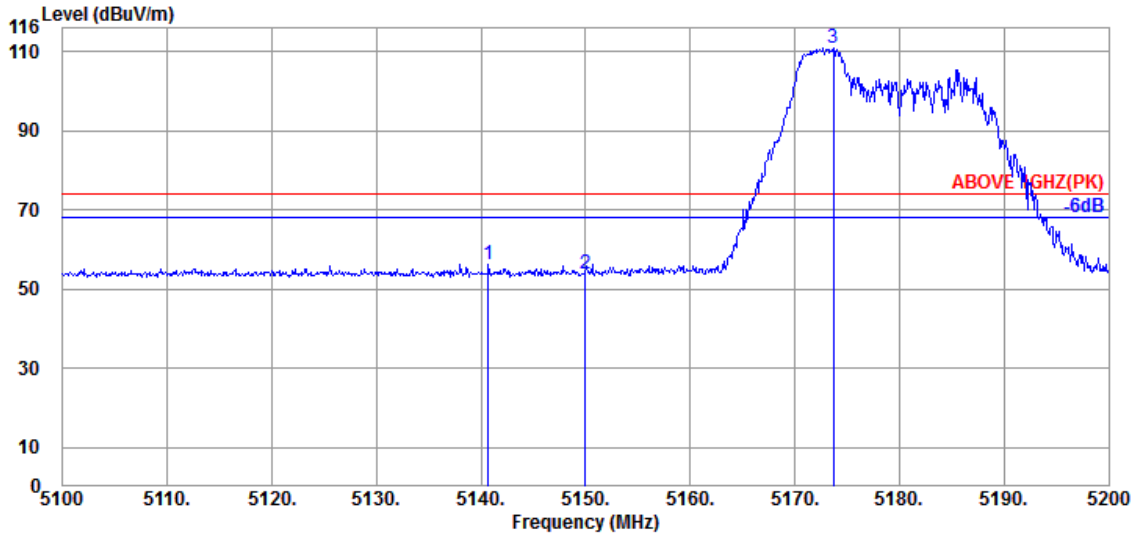

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.700	34.03	8.39	39.21	52.97	56.18	74.00	17.82	Peak
5150.000	34.10	8.39	39.21	50.63	53.91	74.00	20.09	Peak
@ 5173.700	34.23	8.41	39.21	107.34	110.77	---	---	Peak

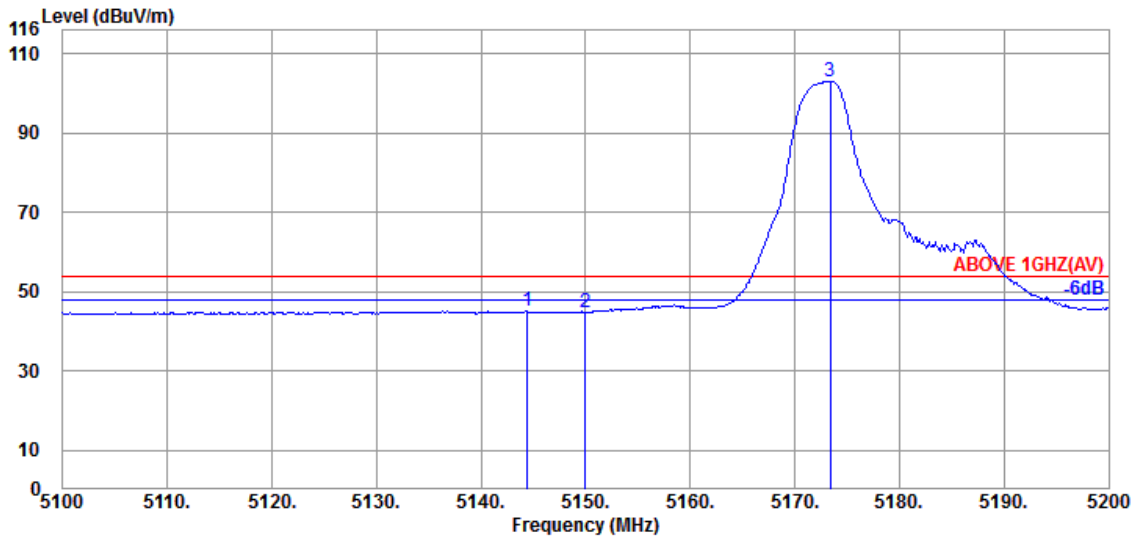


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.400	34.10	8.39	39.21	41.74	45.02	54.00	8.98	Average
5150.000	34.10	8.39	39.21	41.62	44.90	54.00	9.10	Average
@ 5173.400	34.23	8.40	39.21	99.58	103.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

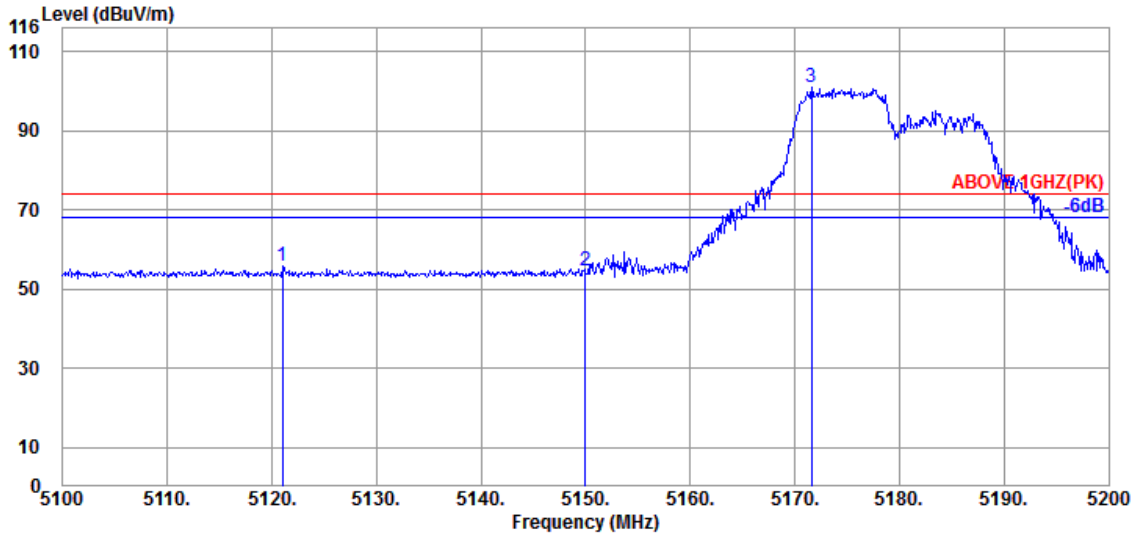

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.000	33.97	8.36	39.22	52.67	55.78	74.00	18.22	Peak
5150.000	34.10	8.39	39.21	51.46	54.74	74.00	19.26	Peak
@ 5171.600	34.23	8.40	39.21	97.54	100.96	---	---	Peak

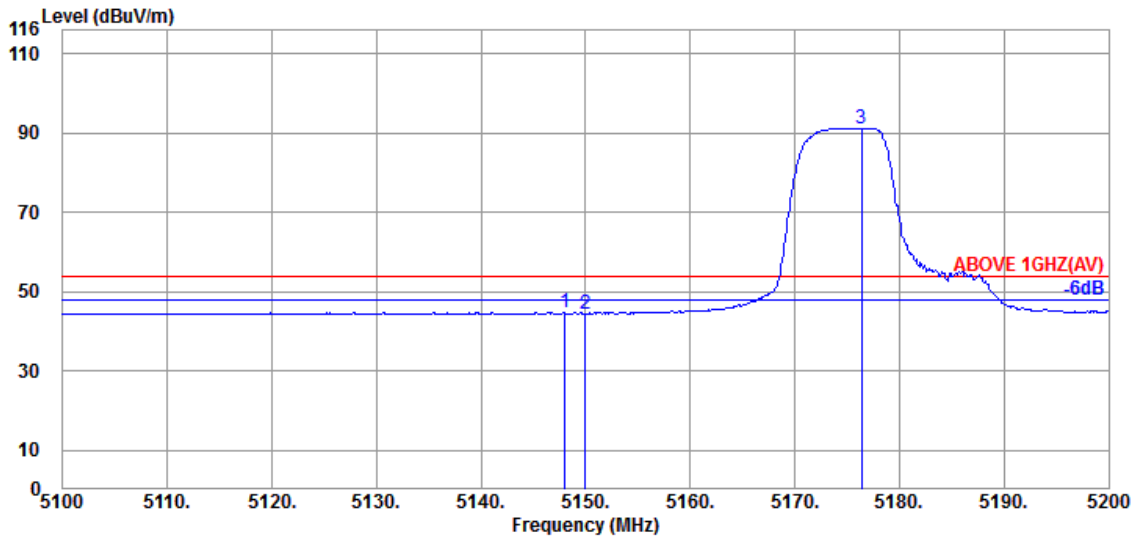


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	34.10	8.39	39.21	41.35	44.63	54.00	9.37	Average
5150.000	34.10	8.39	39.21	41.16	44.44	54.00	9.56	Average
@ 5176.400	34.23	8.41	39.21	87.82	91.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

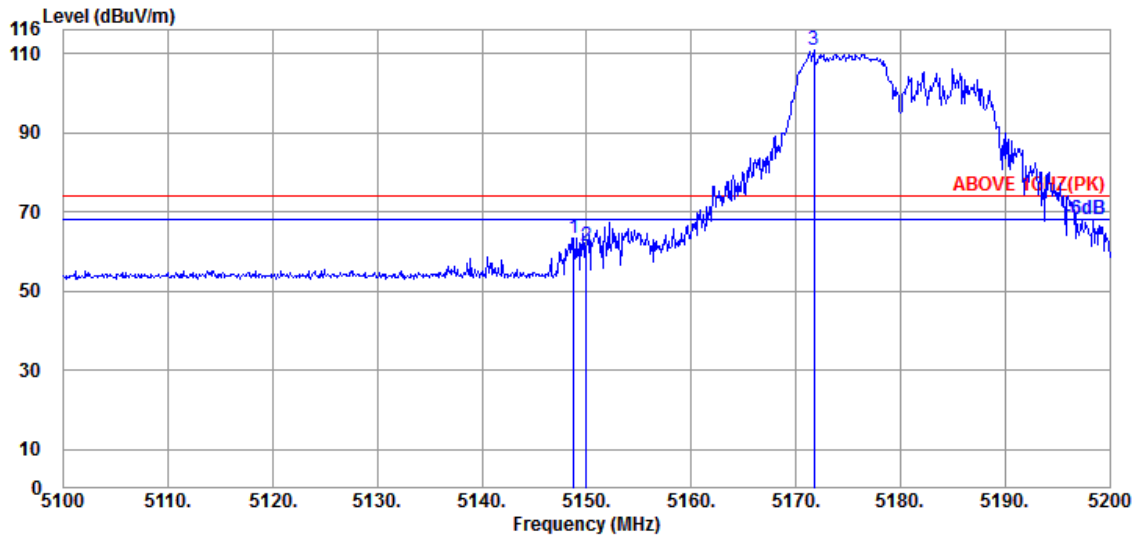

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.10	8.39	39.21	60.16	63.44	74.00	10.56	Peak
5150.000	34.10	8.39	39.21	58.24	61.52	74.00	12.48	Peak
@ 5171.700	34.23	8.40	39.21	107.30	110.72	---	---	Peak

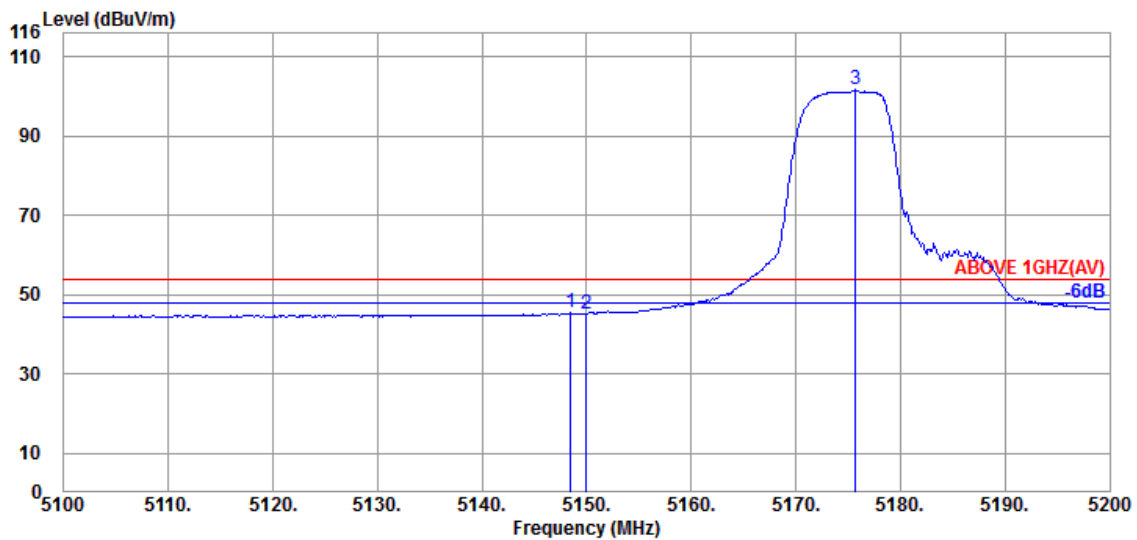


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	34.10	8.39	39.21	42.08	45.36	54.00	8.64	Average
5150.000	34.10	8.39	39.21	41.99	45.27	54.00	8.73	Average
@ 5175.700	34.23	8.41	39.21	98.12	101.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

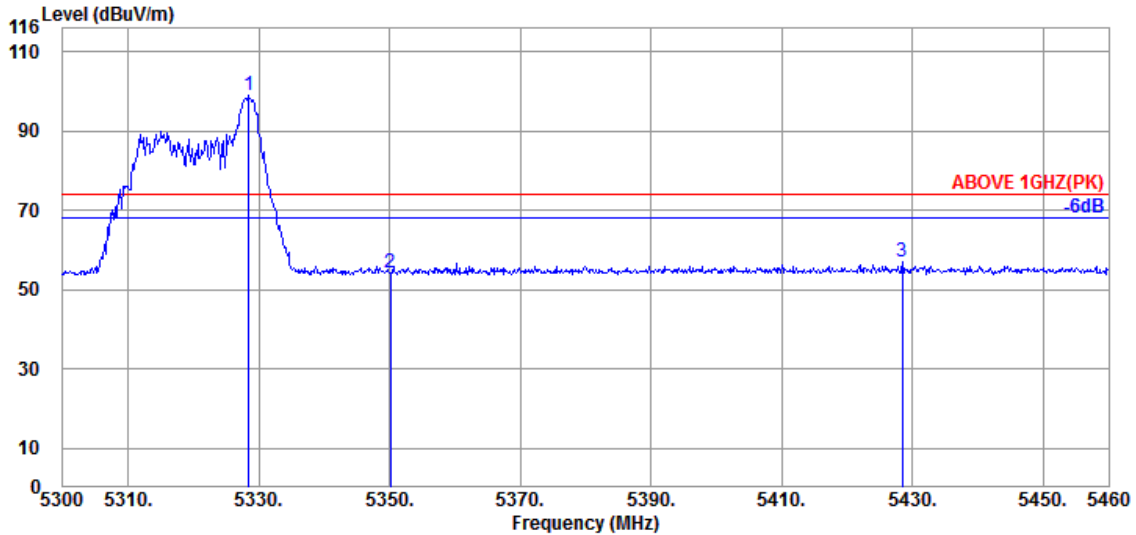

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	8.54	39.19	94.93	98.85	---	---	Peak
5350.080	34.60	8.56	39.19	50.16	54.13	74.00	19.87	Peak
5428.480	34.65	8.61	39.18	52.79	56.87	74.00	17.13	Peak

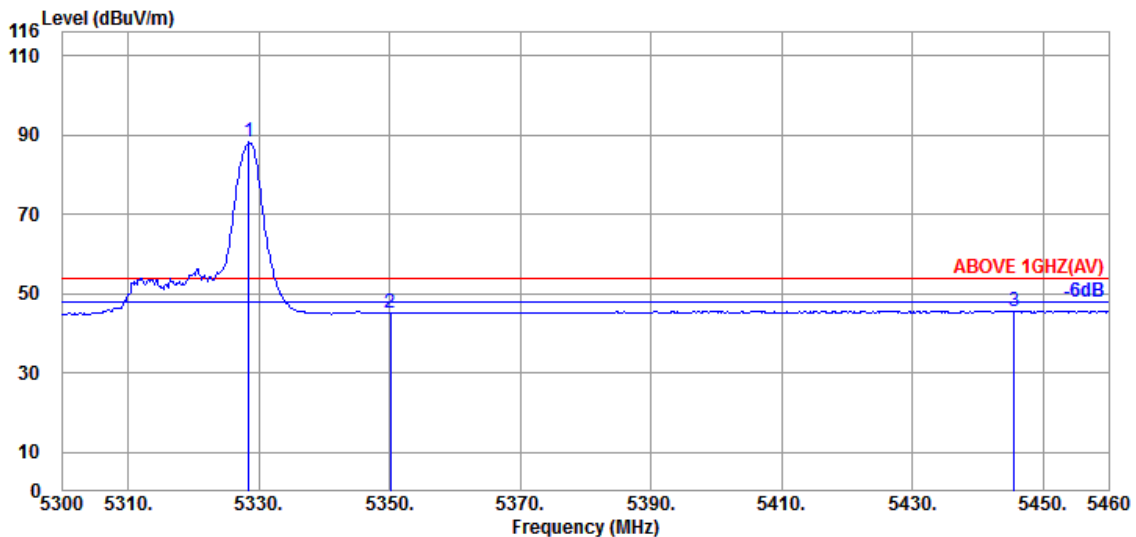


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	8.54	39.19	84.20	88.12	---	---	Average
5350.080	34.60	8.56	39.19	41.15	45.12	54.00	8.88	Average
5445.600	34.62	8.64	39.18	41.52	45.60	54.00	8.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

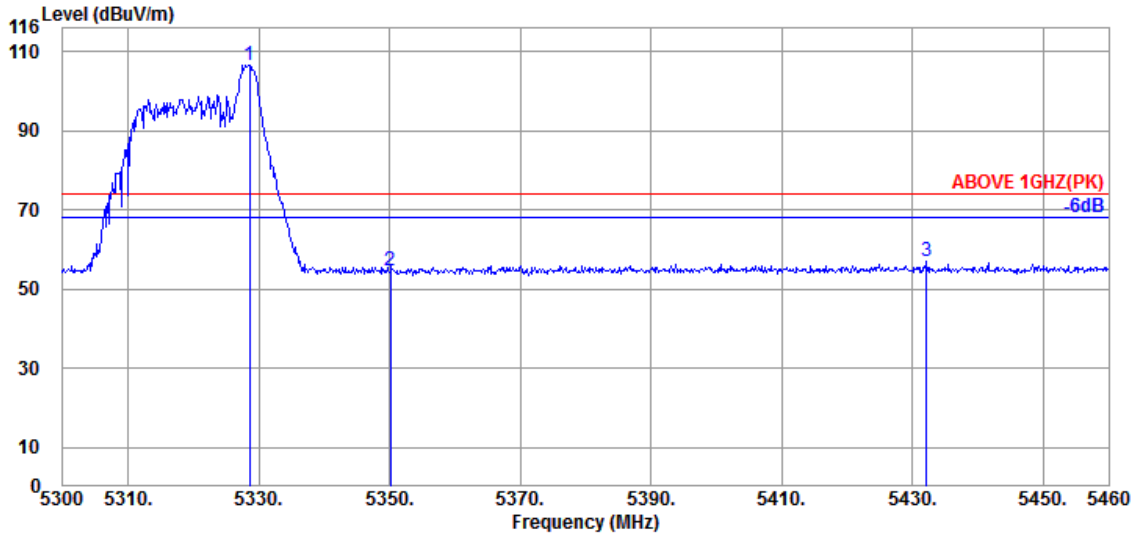

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.57	8.54	39.19	102.73	106.65	---	---	Peak
5350.080	34.60	8.56	39.19	50.75	54.72	74.00	19.28	Peak
5432.160	34.62	8.63	39.18	53.07	57.14	74.00	16.86	Peak

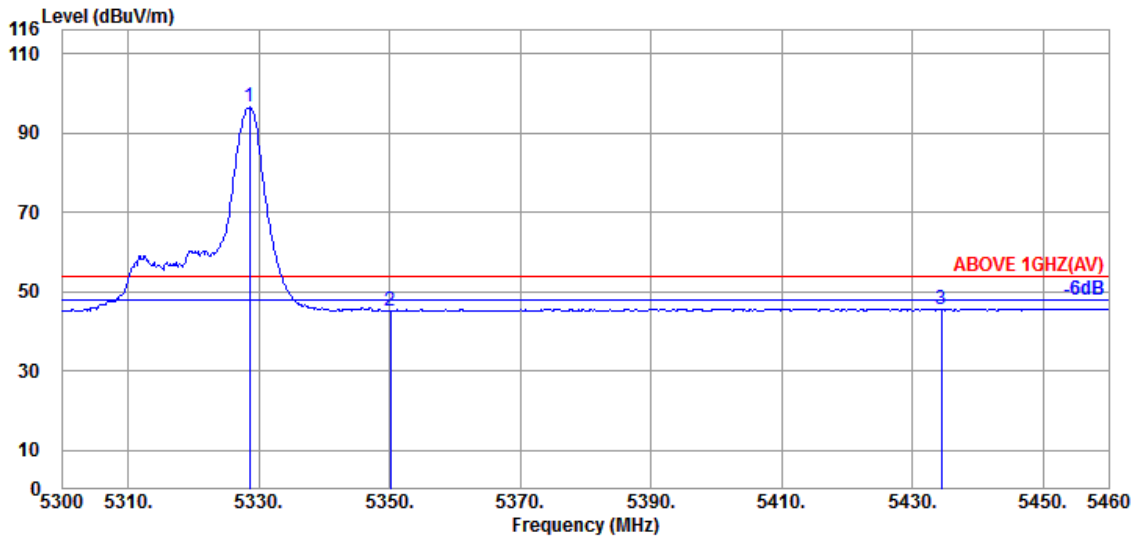


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.57	8.54	39.19	92.55	96.47	---	---	Average
5350.080	34.60	8.56	39.19	41.27	45.24	54.00	8.76	Average
5434.400	34.62	8.63	39.18	41.57	45.64	54.00	8.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

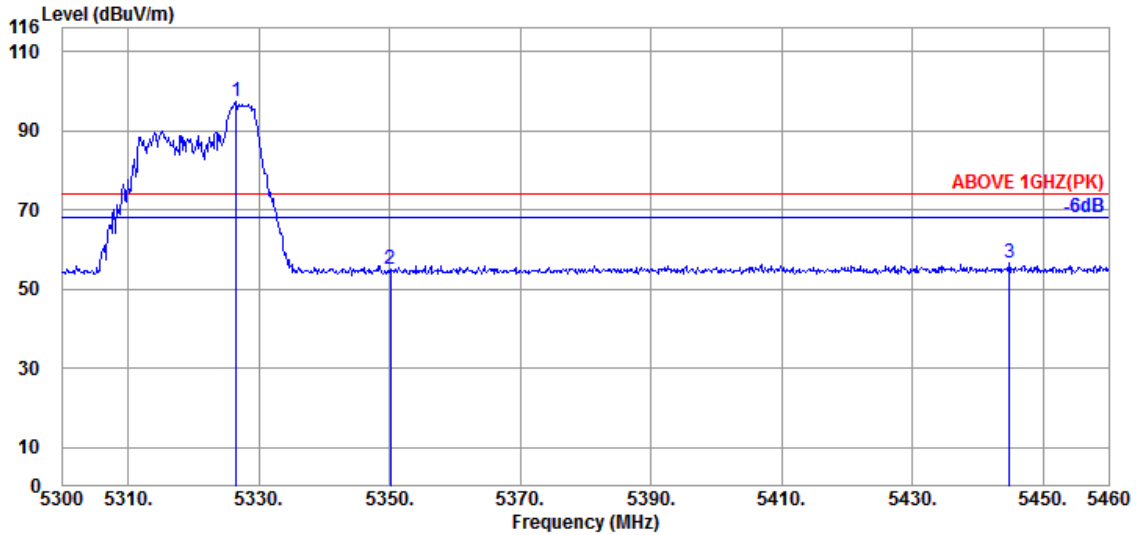

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.560	34.57	8.54	39.19	93.38	97.30	---	---	Peak
5350.080	34.60	8.56	39.19	50.94	54.91	74.00	19.09	Peak
5444.800	34.62	8.63	39.18	52.38	56.45	74.00	17.55	Peak

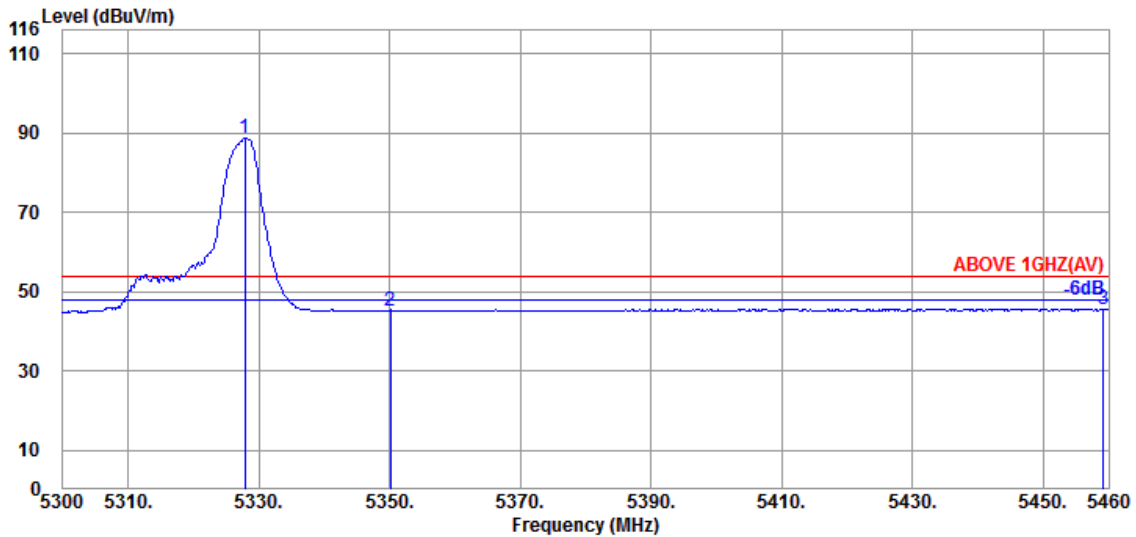


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.57	8.54	39.19	84.72	88.64	---	---	Average
5350.080	34.60	8.56	39.19	41.33	45.30	54.00	8.70	Average
5459.200	34.60	8.64	39.17	41.59	45.66	54.00	8.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

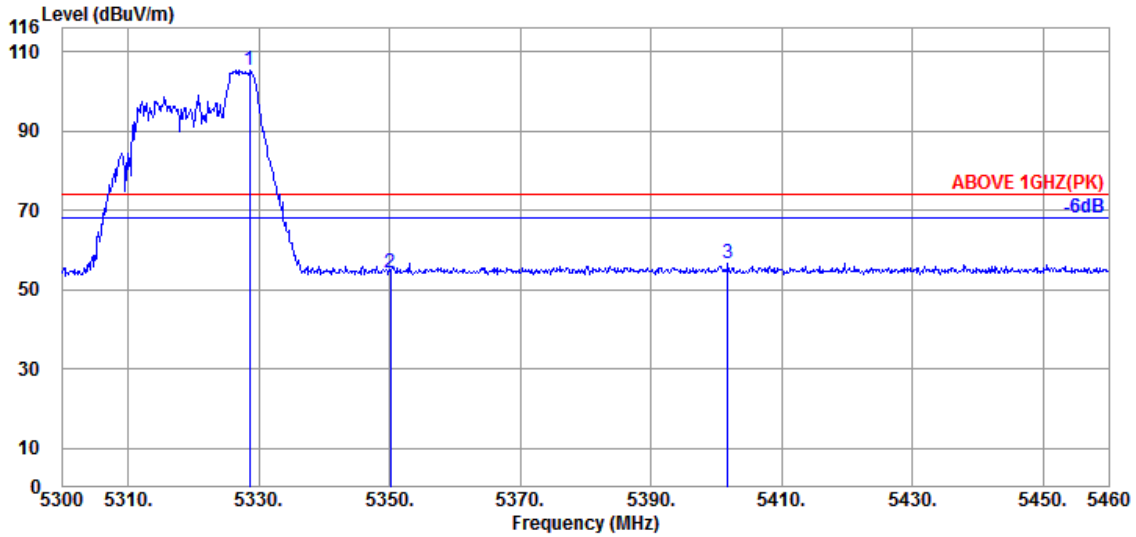

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.57	8.54	39.19	101.26	105.18	---	---	Peak
5350.080	34.60	8.56	39.19	50.41	54.38	74.00	19.62	Peak
5401.760	34.67	8.60	39.18	52.62	56.71	74.00	17.29	Peak

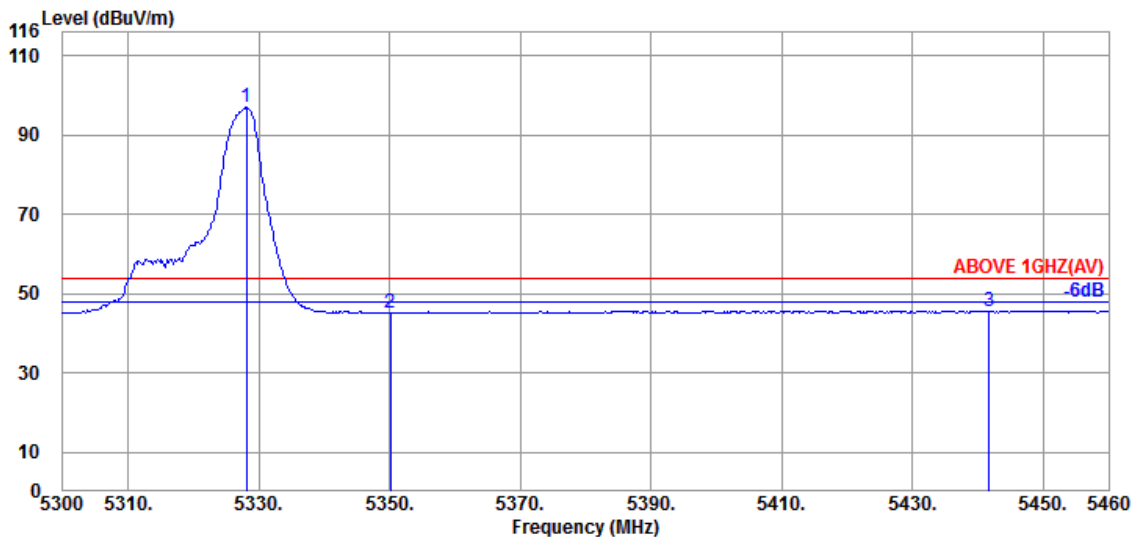


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	8.54	39.19	92.90	96.82	---	---	Average
5350.080	34.60	8.56	39.19	41.21	45.18	54.00	8.82	Average
5441.760	34.62	8.63	39.18	41.57	45.64	54.00	8.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

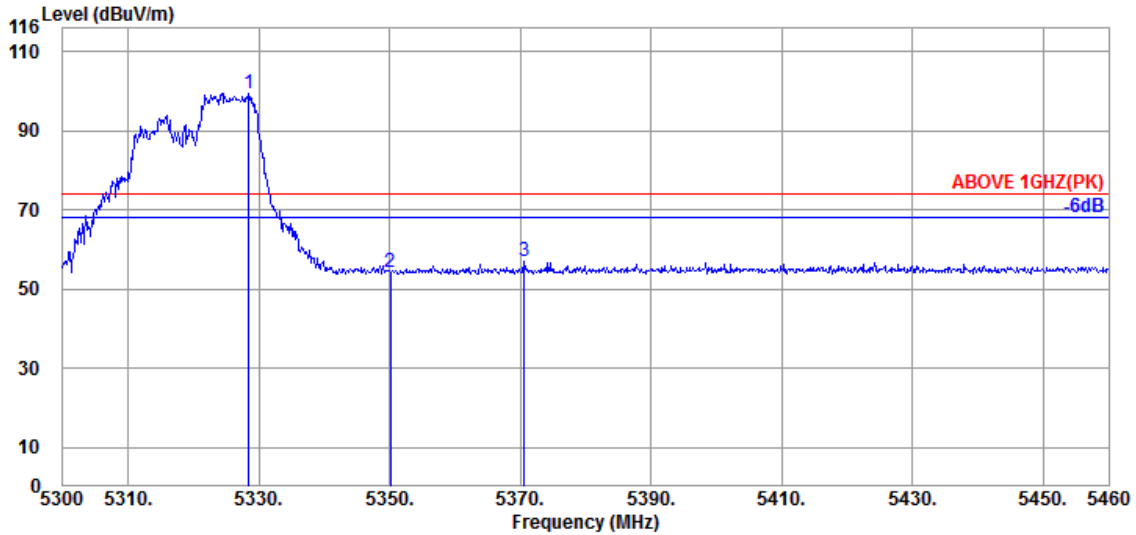

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	8.54	39.19	95.49	99.41	---	---	Peak
5350.080	34.60	8.56	39.19	50.34	54.31	74.00	19.69	Peak
5370.560	34.67	8.57	39.18	52.83	56.89	74.00	17.11	Peak

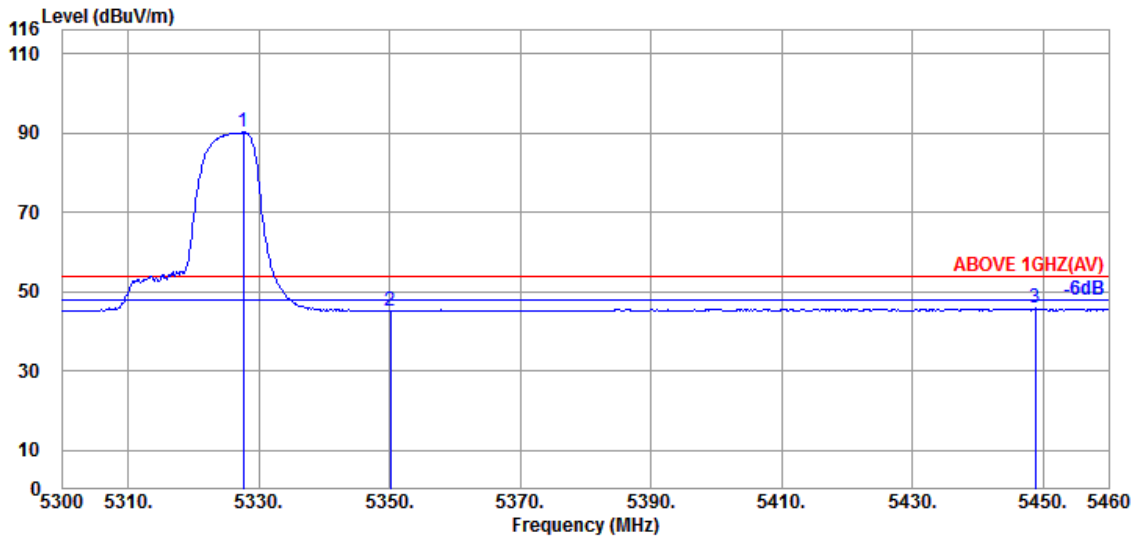


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.680	34.57	8.54	39.19	86.29	90.21	---	---	Average
5350.080	34.60	8.56	39.19	41.20	45.17	54.00	8.83	Average
5448.800	34.60	8.64	39.18	41.70	45.76	54.00	8.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

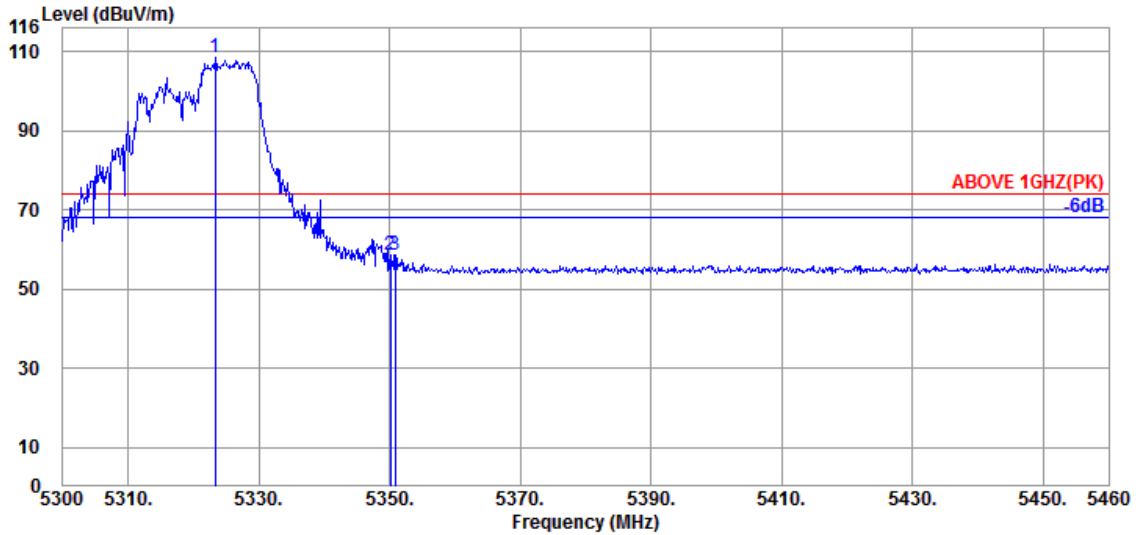

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	34.57	8.53	39.19	104.67	108.58	---	---	Peak
5350.080	34.60	8.56	39.19	54.51	58.48	74.00	15.52	Peak
5350.880	34.60	8.56	39.19	54.66	58.63	74.00	15.37	Peak

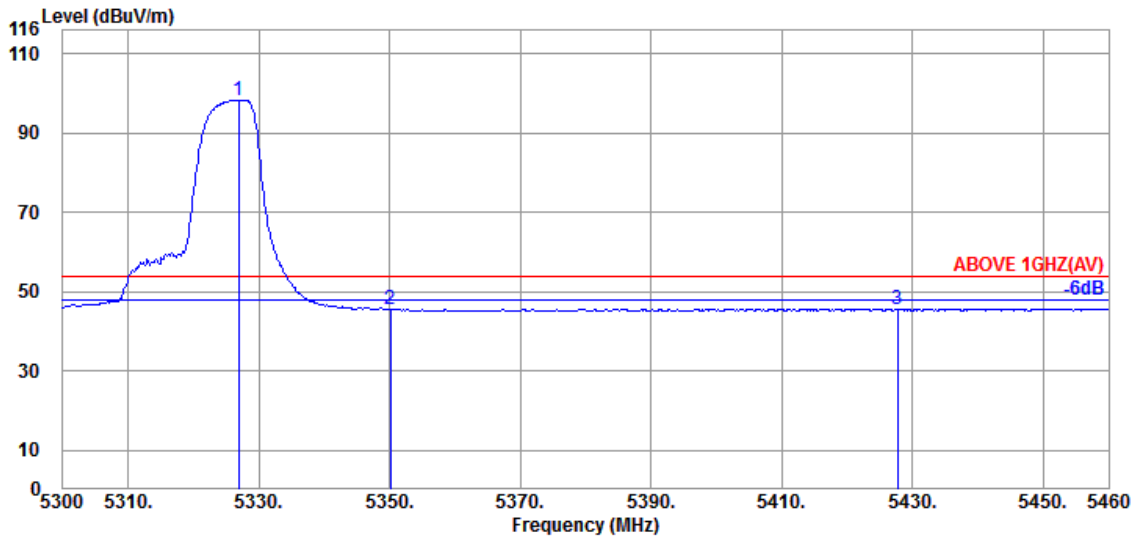


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.880	34.57	8.54	39.19	94.46	98.38	---	---	Average
5350.080	34.60	8.56	39.19	41.44	45.41	54.00	8.59	Average
5427.680	34.65	8.61	39.18	41.61	45.69	54.00	8.31	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

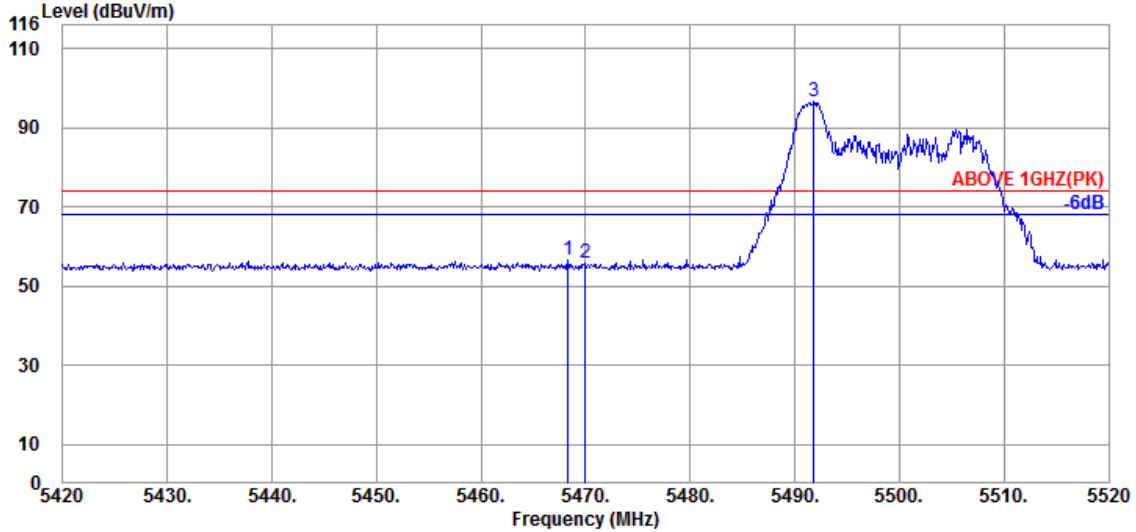

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.57	8.65	39.17	52.48	56.53	74.00	17.47	Peak
5470.000	34.57	8.65	39.17	51.69	55.74	74.00	18.26	Peak
@ 5491.800	34.53	8.67	39.17	92.63	96.66	---	---	Peak

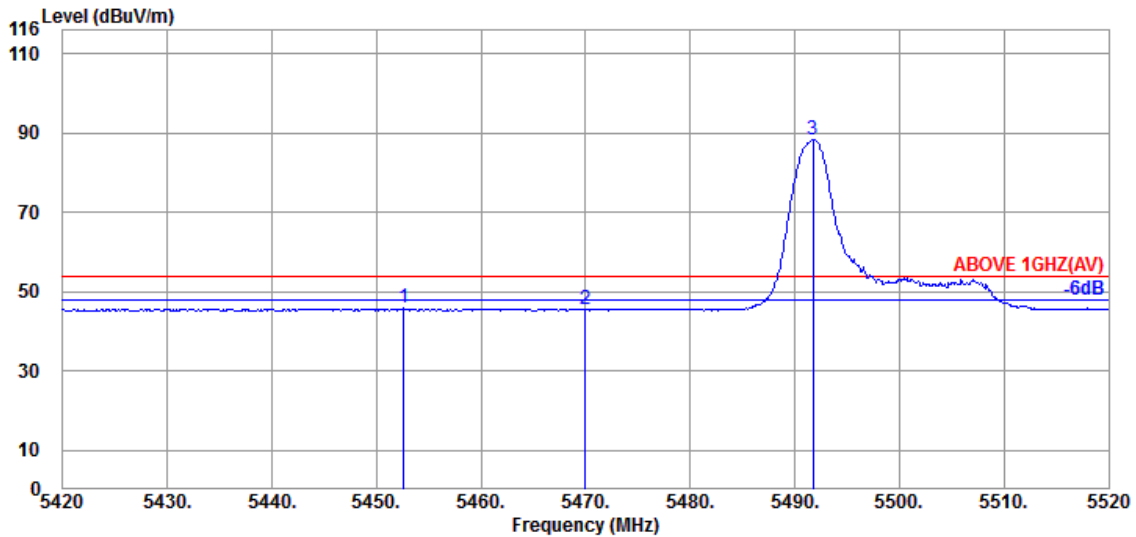


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.600	34.60	8.64	39.17	41.66	45.73	54.00	8.27	Average
5470.000	34.57	8.65	39.17	41.38	45.43	54.00	8.57	Average
@ 5491.700	34.53	8.67	39.17	84.36	88.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

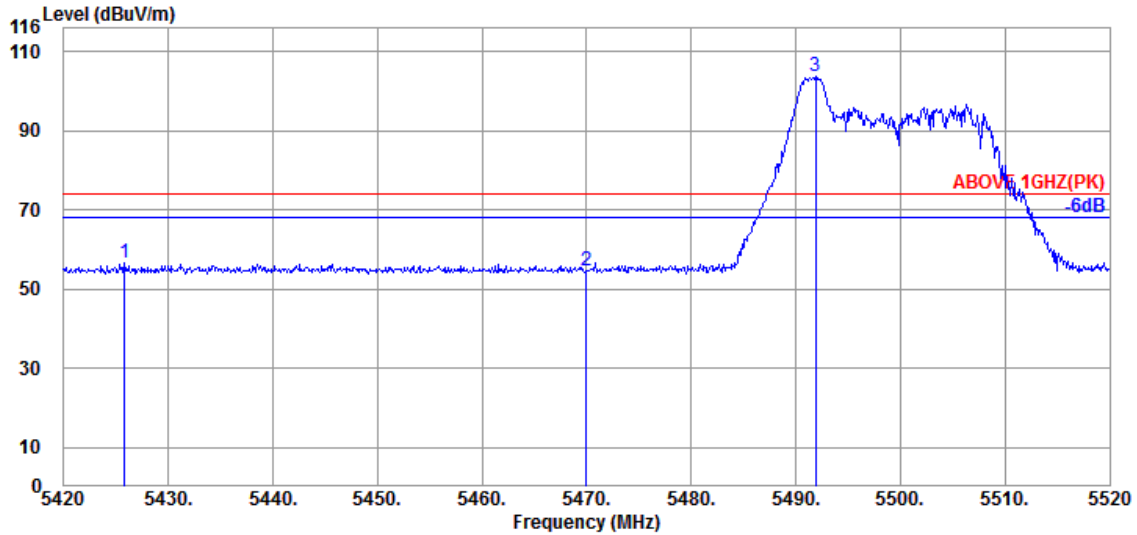

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.800	34.65	8.61	39.18	52.67	56.75	74.00	17.25	Peak
5470.000	34.57	8.65	39.17	50.58	54.63	74.00	19.37	Peak
@ 5491.900	34.53	8.67	39.17	99.50	103.53	---	---	Peak

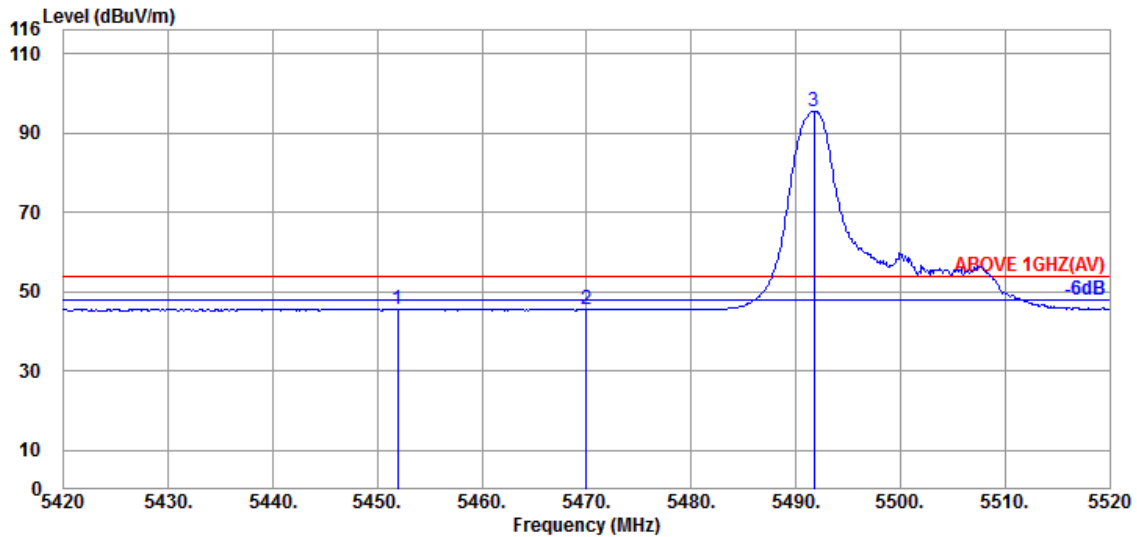


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.900	34.60	8.64	39.17	41.58	45.65	54.00	8.35	Average
5470.000	34.57	8.65	39.17	41.37	45.42	54.00	8.58	Average
@ 5491.700	34.53	8.67	39.17	91.55	95.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

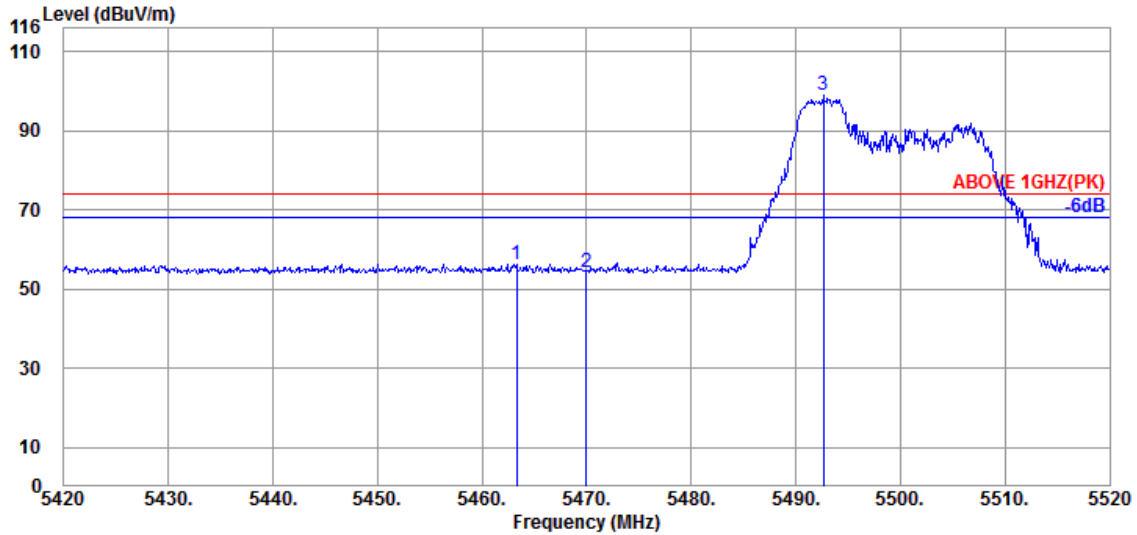

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.60	8.65	39.17	52.33	56.41	74.00	17.59	Peak
5470.000	34.57	8.65	39.17	50.21	54.26	74.00	19.74	Peak
@ 5492.600	34.53	8.67	39.17	94.93	98.96	---	---	Peak

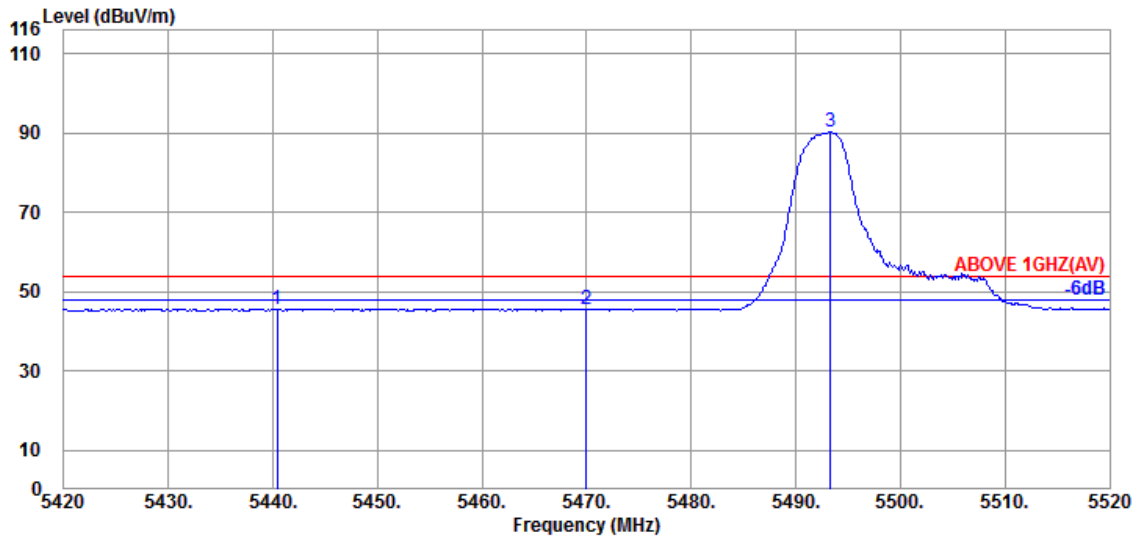


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.400	34.62	8.63	39.18	41.62	45.69	54.00	8.31	Average
5470.000	34.57	8.65	39.17	41.34	45.39	54.00	8.61	Average
@ 5493.300	34.53	8.67	39.17	86.11	90.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

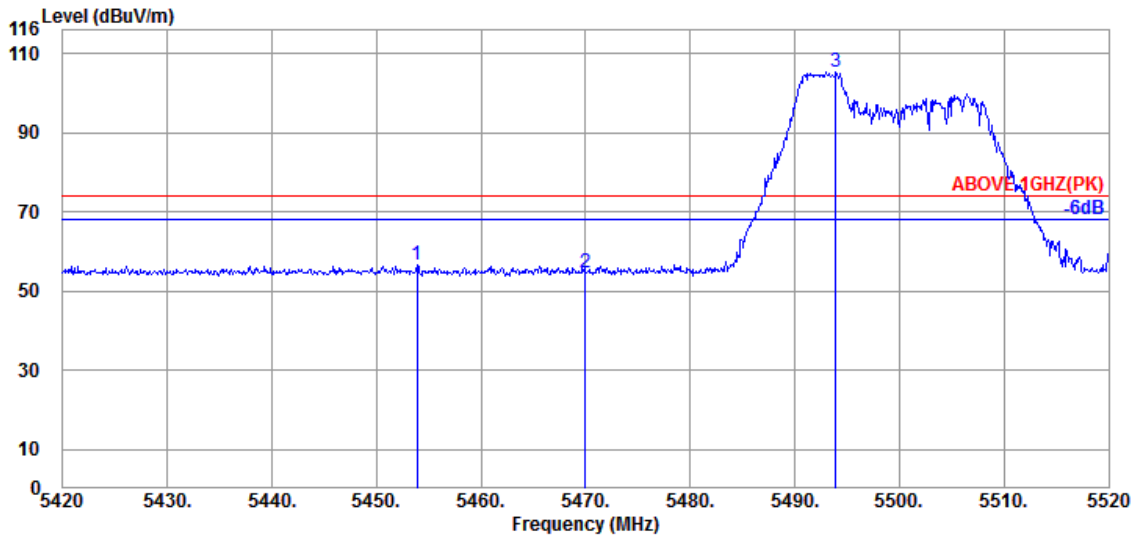

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.900	34.60	8.64	39.17	52.69	56.76	74.00	17.24	Peak
5470.000	34.57	8.65	39.17	50.49	54.54	74.00	19.46	Peak
@ 5493.900	34.53	8.67	39.17	101.37	105.40	---	---	Peak

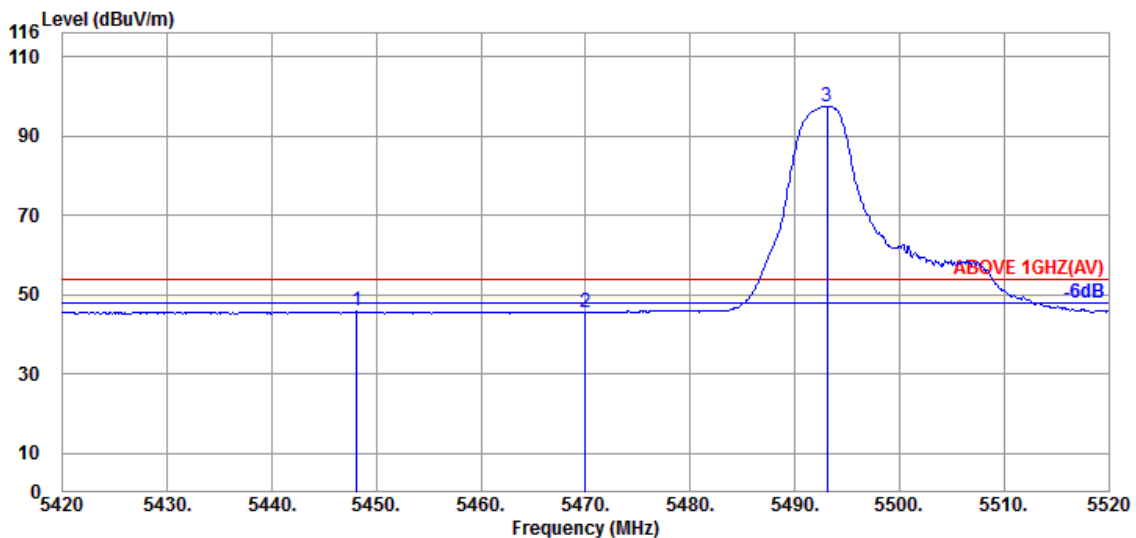


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.100	34.60	8.64	39.18	41.67	45.73	54.00	8.27	Average
5470.000	34.57	8.65	39.17	41.60	45.65	54.00	8.35	Average
@ 5493.100	34.53	8.67	39.17	93.41	97.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

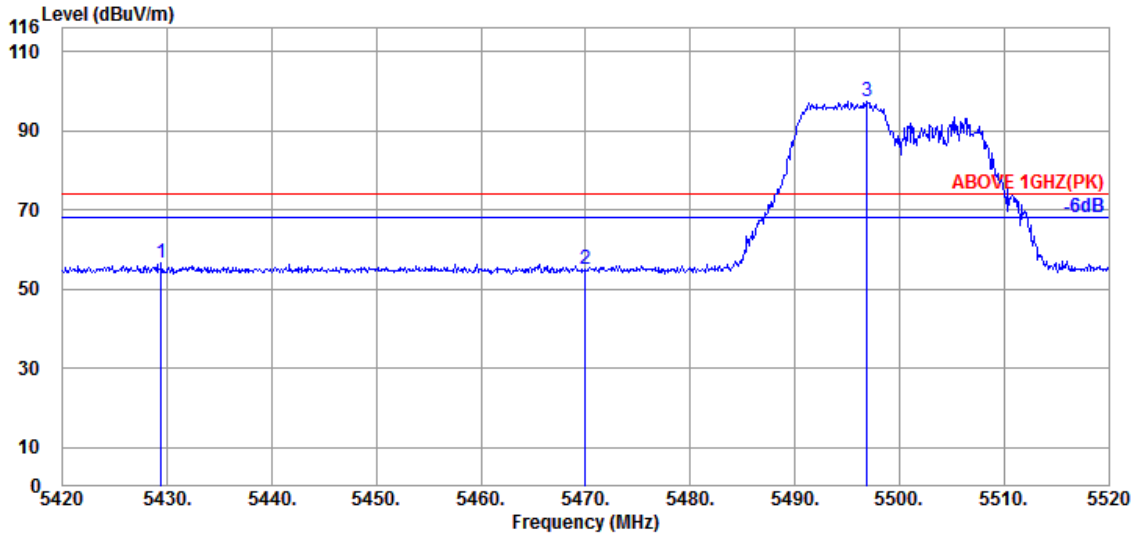

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.400	34.65	8.63	39.18	52.34	56.44	74.00	17.56	Peak
5470.000	34.57	8.65	39.17	50.81	54.86	74.00	19.14	Peak
@ 5496.900	34.50	8.68	39.17	93.44	97.45	---	---	Peak

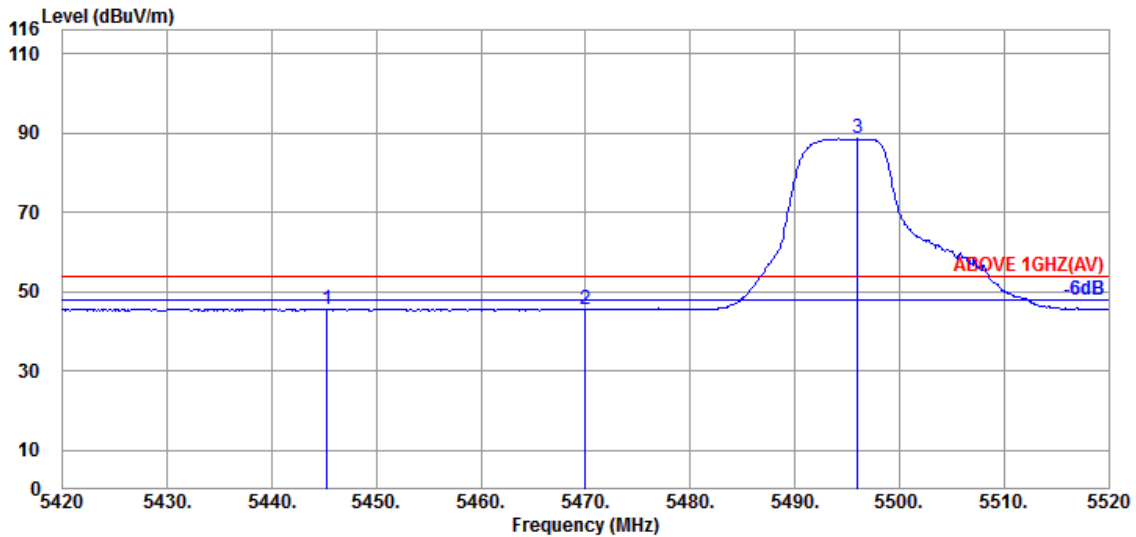


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.300	34.62	8.63	39.18	41.53	45.60	54.00	8.40	Average
5470.000	34.57	8.65	39.17	41.36	45.41	54.00	8.59	Average
@ 5496.000	34.50	8.67	39.17	84.54	88.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

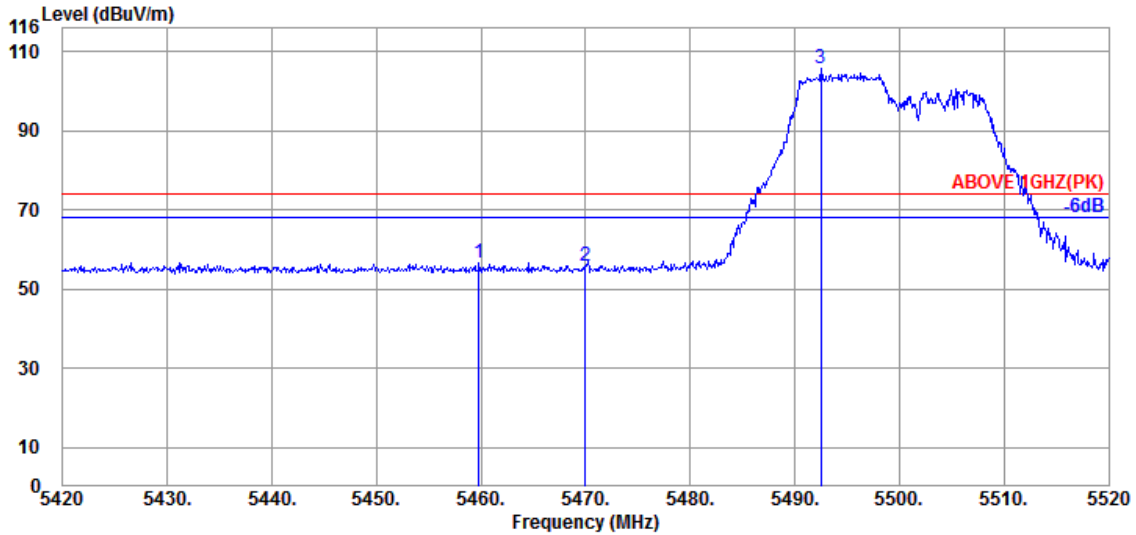

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.60	8.64	39.17	52.65	56.72	74.00	17.28	Peak
5470.000	34.57	8.65	39.17	51.73	55.78	74.00	18.22	Peak
@ 5492.500	34.53	8.67	39.17	101.81	105.84	---	---	Peak

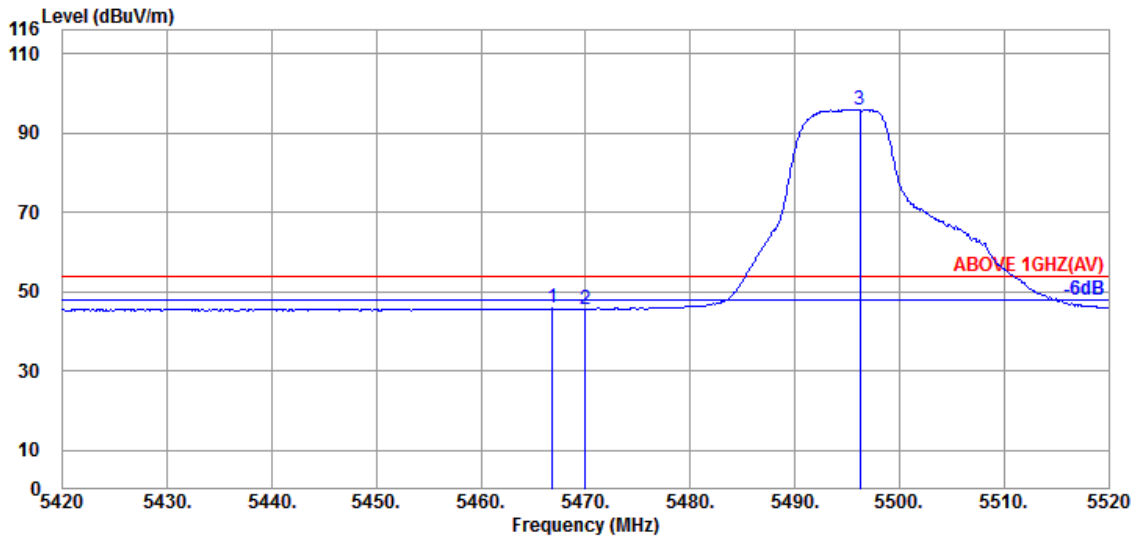


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.57	8.65	39.17	41.71	45.76	54.00	8.24	Average
5470.000	34.57	8.65	39.17	41.44	45.49	54.00	8.51	Average
@ 5496.200	34.50	8.67	39.17	91.82	95.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/8	Frequency	TX 5700MHz

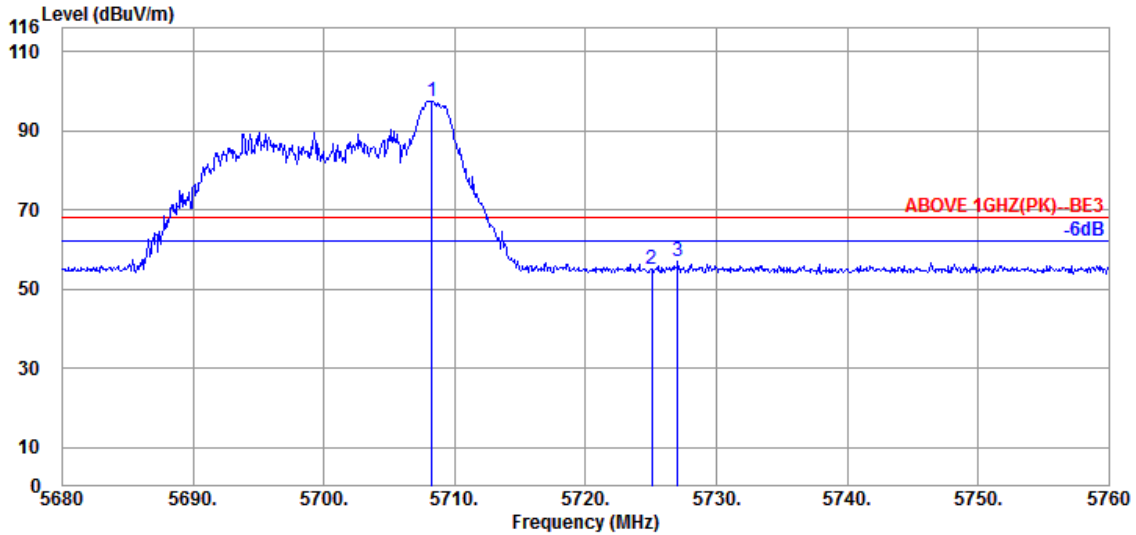

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.240	34.50	8.85	39.23	93.44	97.56	---	---	Peak
5725.040	34.50	8.86	39.23	50.93	55.06	68.20	13.14	Peak
5727.040	34.50	8.86	39.23	52.90	57.03	68.20	11.17	Peak

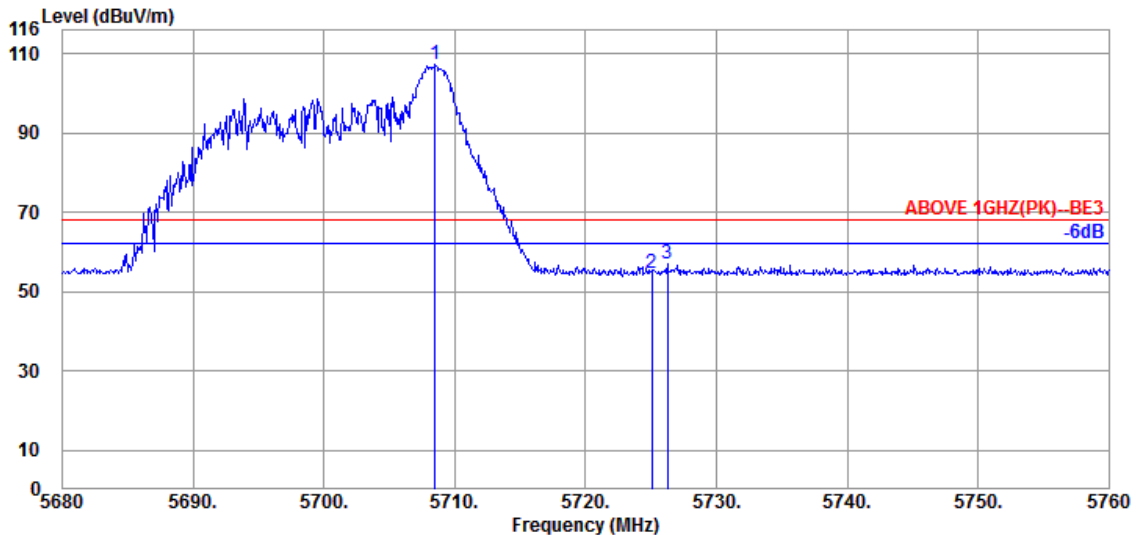


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.480	34.50	8.85	39.23	103.24	107.36	---	---	Peak
5725.040	34.50	8.86	39.23	50.36	54.49	68.20	13.71	Peak
5726.240	34.50	8.86	39.23	52.94	57.07	68.20	11.13	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/40	Frequency	TX 5700MHz

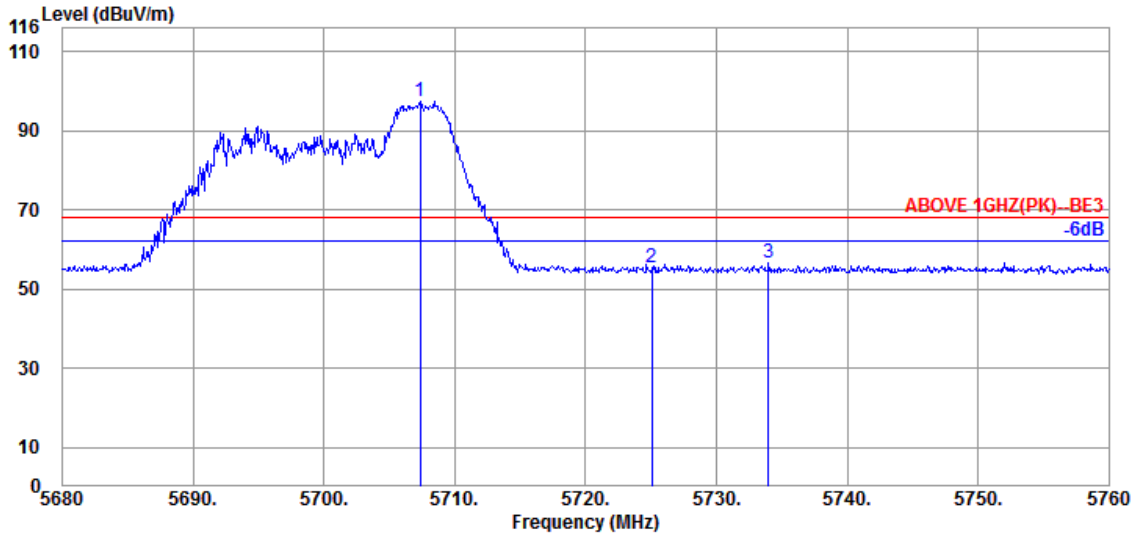

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.360	34.50	8.85	39.22	93.43	97.56	---	---	Peak
5725.040	34.50	8.86	39.23	51.46	55.59	68.20	12.61	Peak
5734.000	34.50	8.86	39.23	52.58	56.71	68.20	11.49	Peak

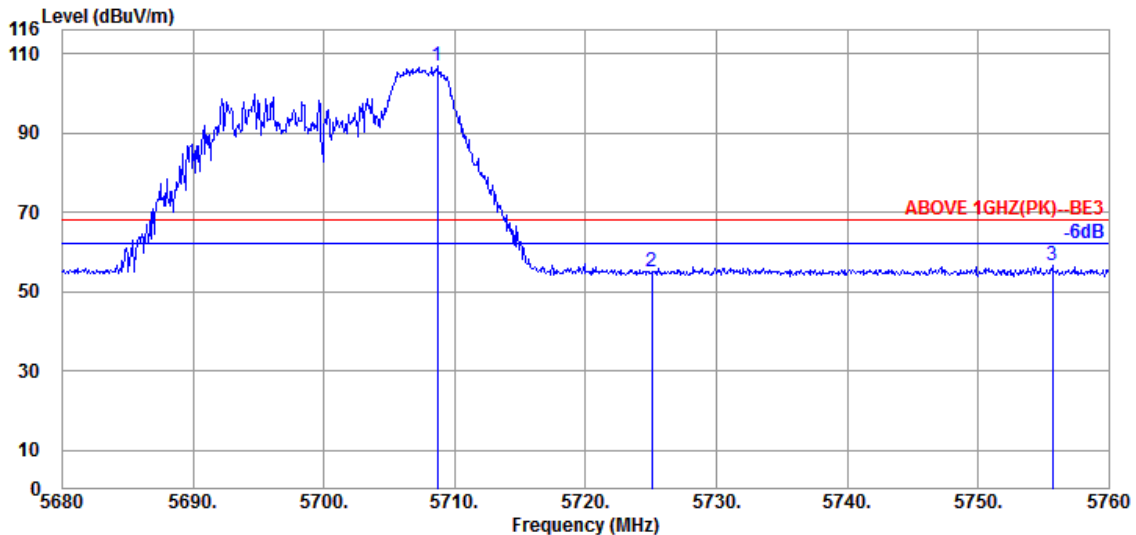


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.640	34.50	8.85	39.23	102.89	107.01	---	---	Peak
5725.040	34.50	8.86	39.23	51.03	55.16	68.20	13.04	Peak
5755.680	34.47	8.89	39.24	52.44	56.56	68.20	11.64	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/54	Frequency	TX 5700MHz

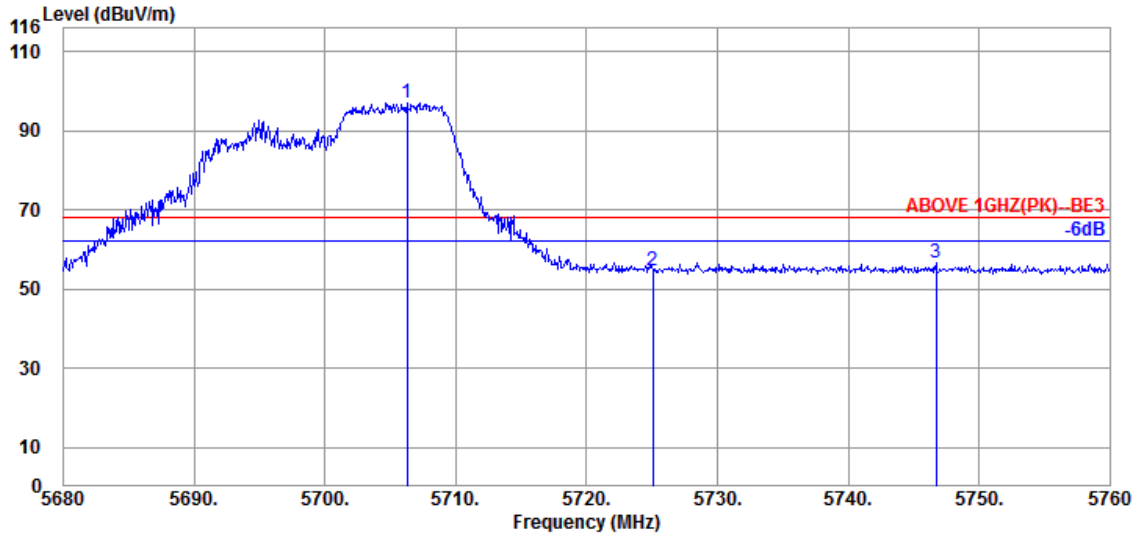

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.240	34.50	8.85	39.22	92.95	97.08	---	---	Peak
5725.040	34.50	8.86	39.23	50.66	54.79	68.20	13.41	Peak
5746.720	34.50	8.88	39.24	52.59	56.73	68.20	11.47	Peak

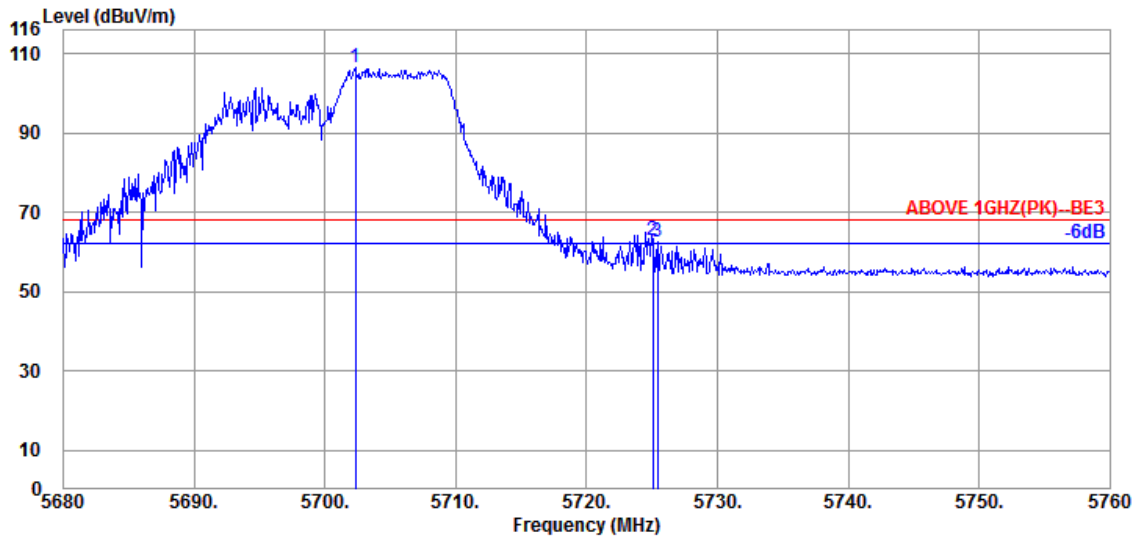


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.320	34.50	8.85	39.22	102.49	106.62	---	---	Peak
5725.040	34.50	8.86	39.23	58.86	62.99	68.20	5.21	Peak
5725.440	34.50	8.86	39.23	58.62	62.75	68.20	5.45	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

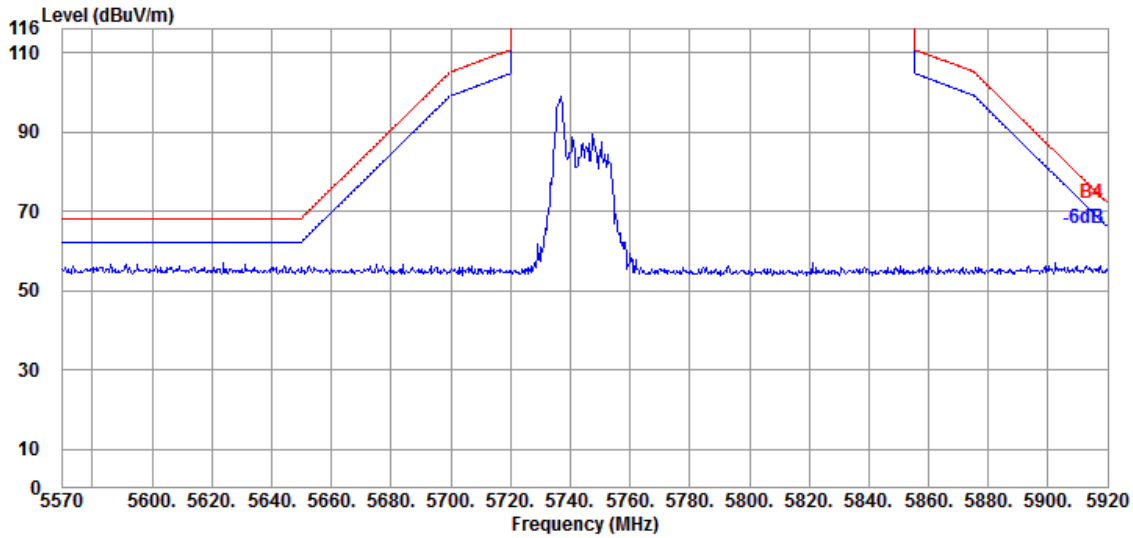


Antenna at Vertical Polarization

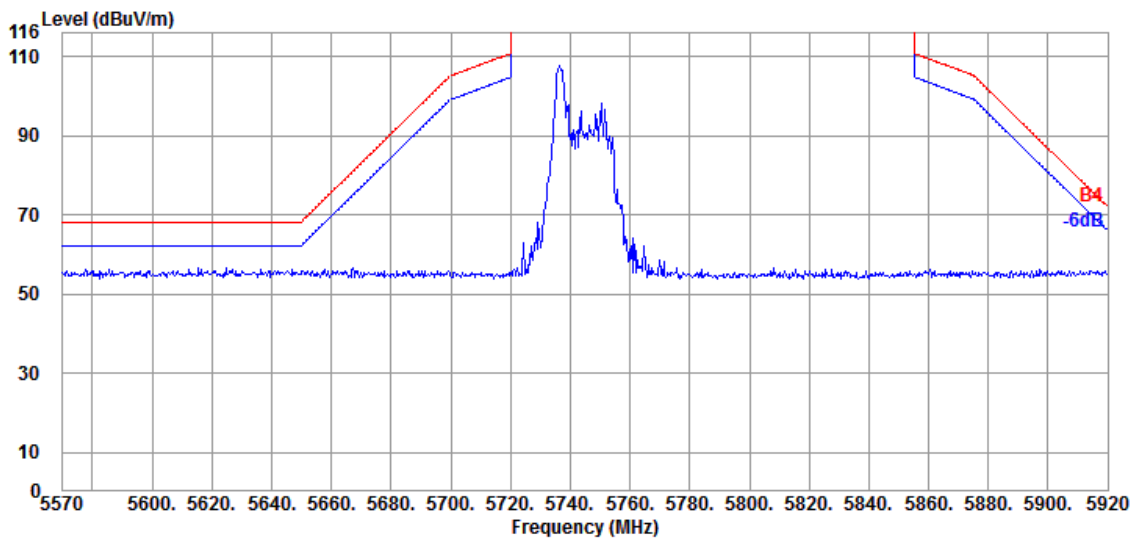


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

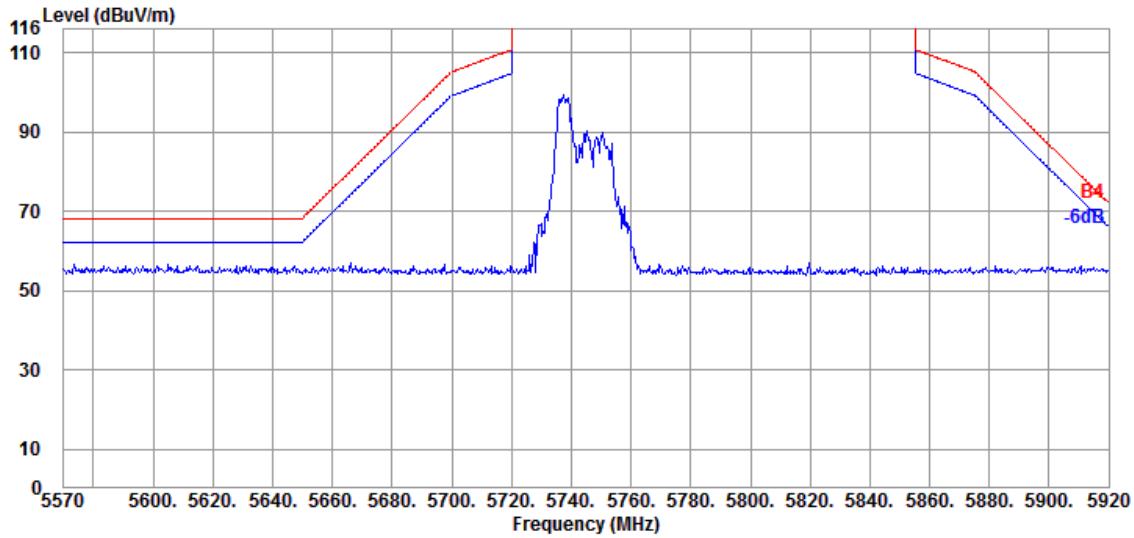


Antenna at Vertical Polarization

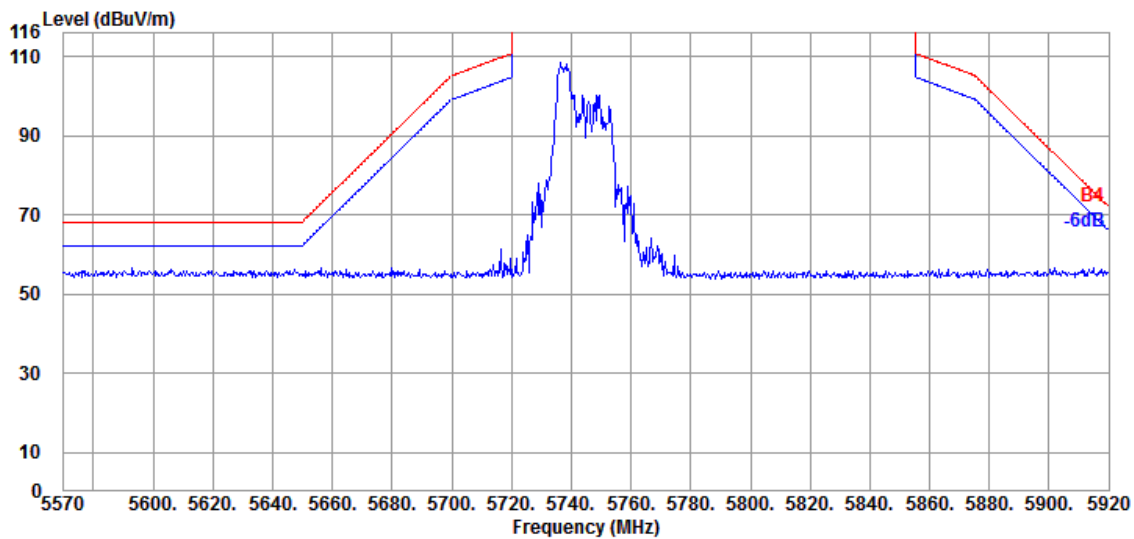


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

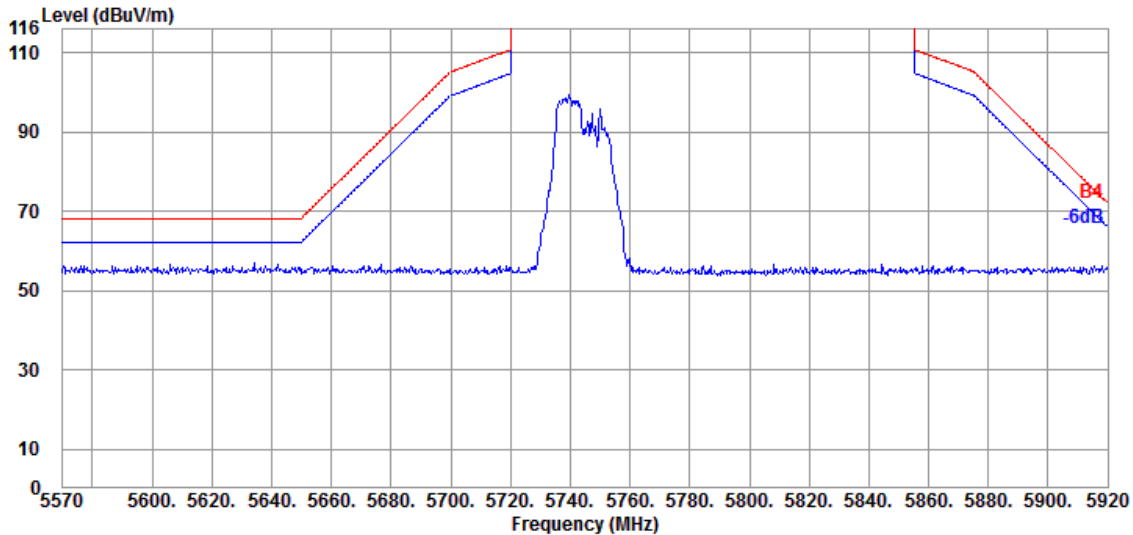


Antenna at Vertical Polarization

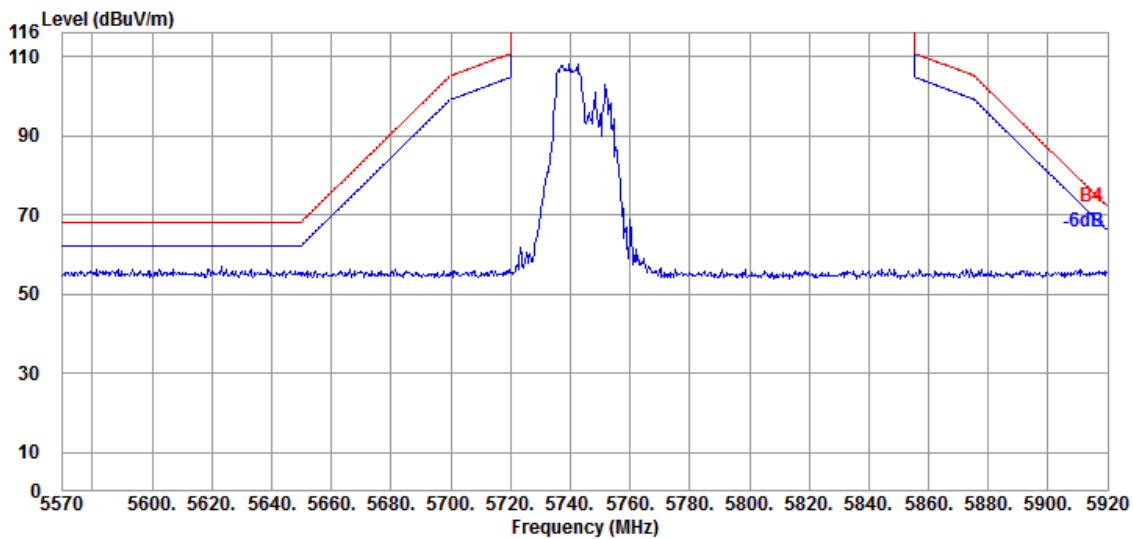


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

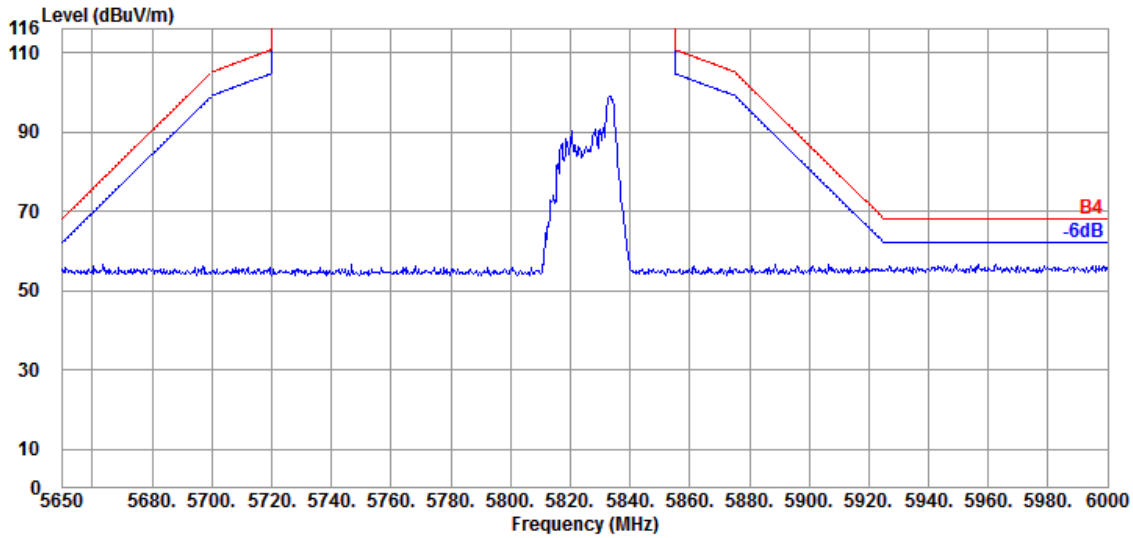


Antenna at Vertical Polarization

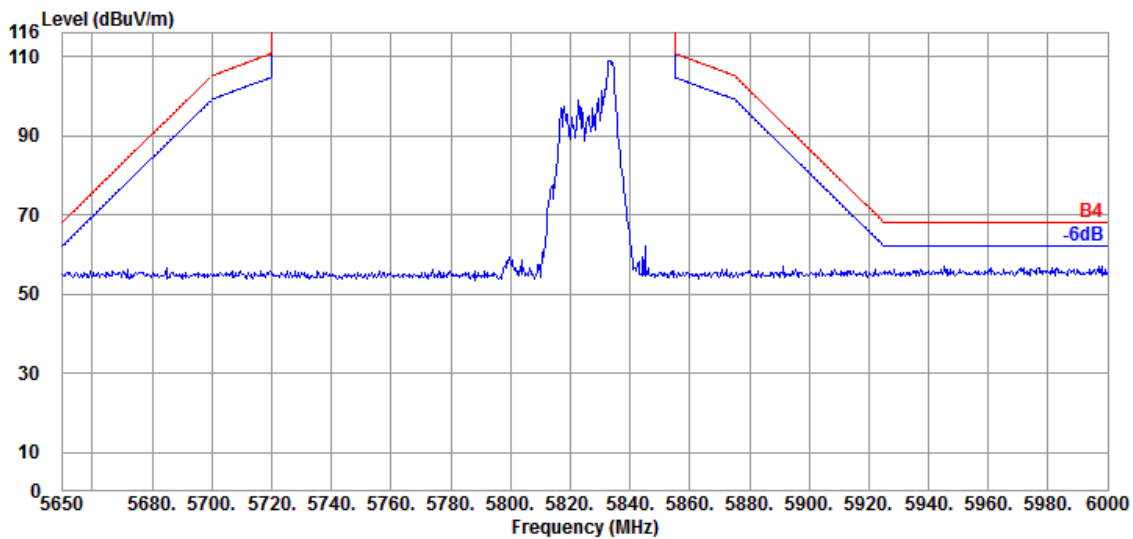




Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

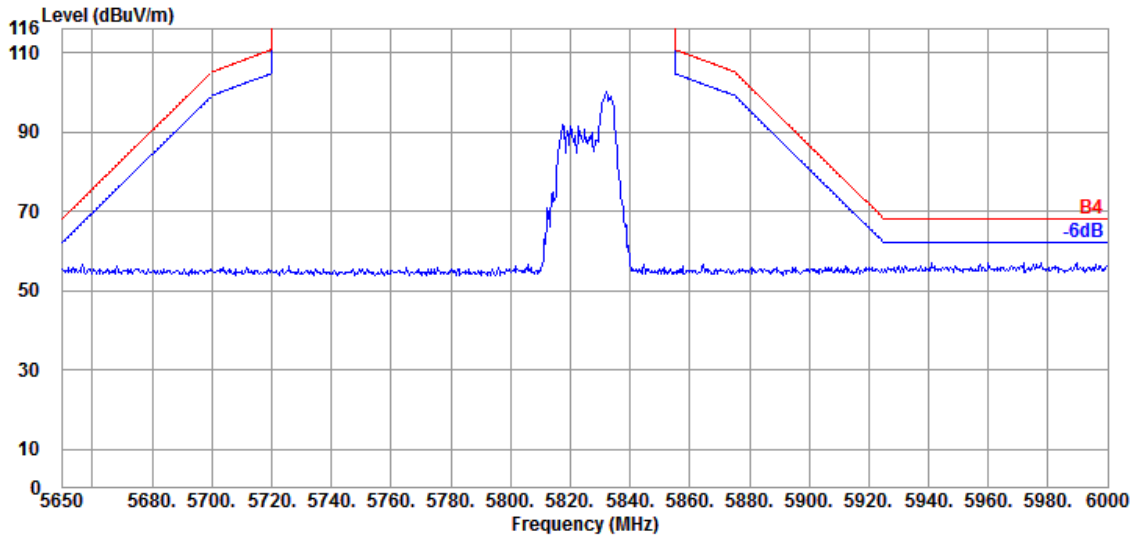


Antenna at Vertical Polarization

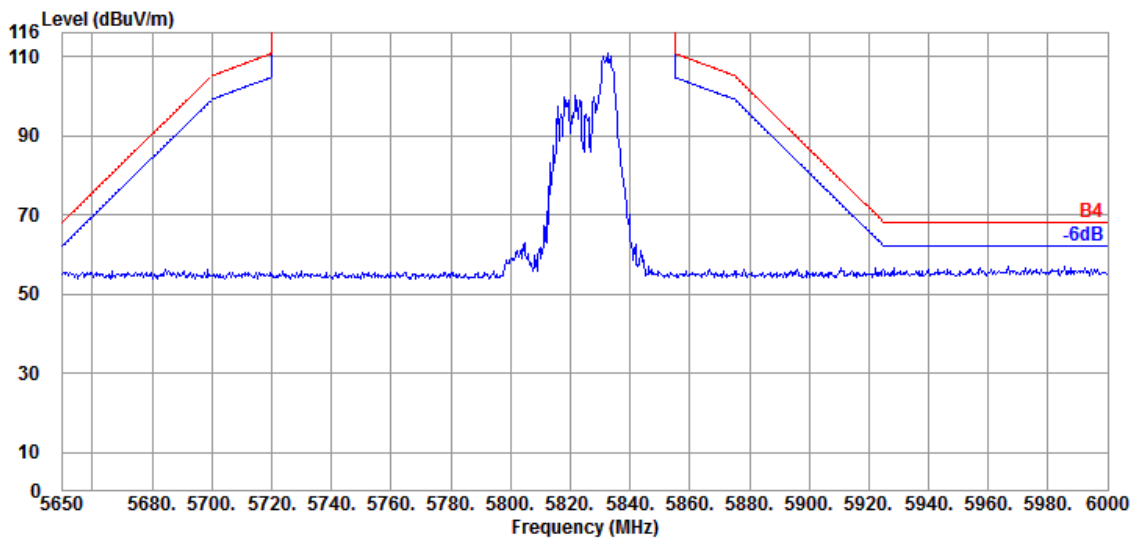


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/54	Frequency	TX 5825MHz


### Antenna at Horizontal Polarization

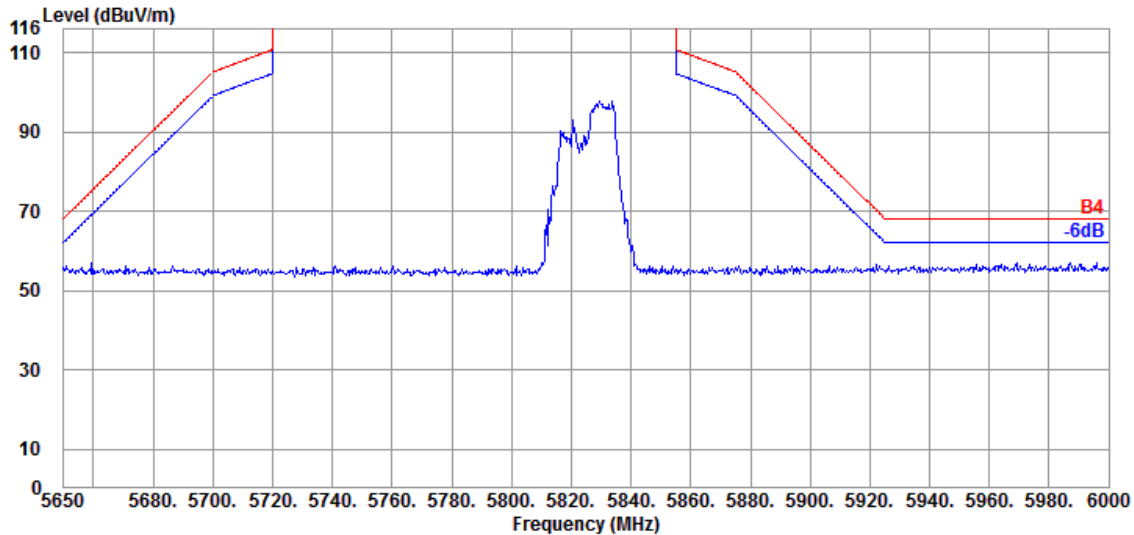

### Antenna at Vertical Polarization

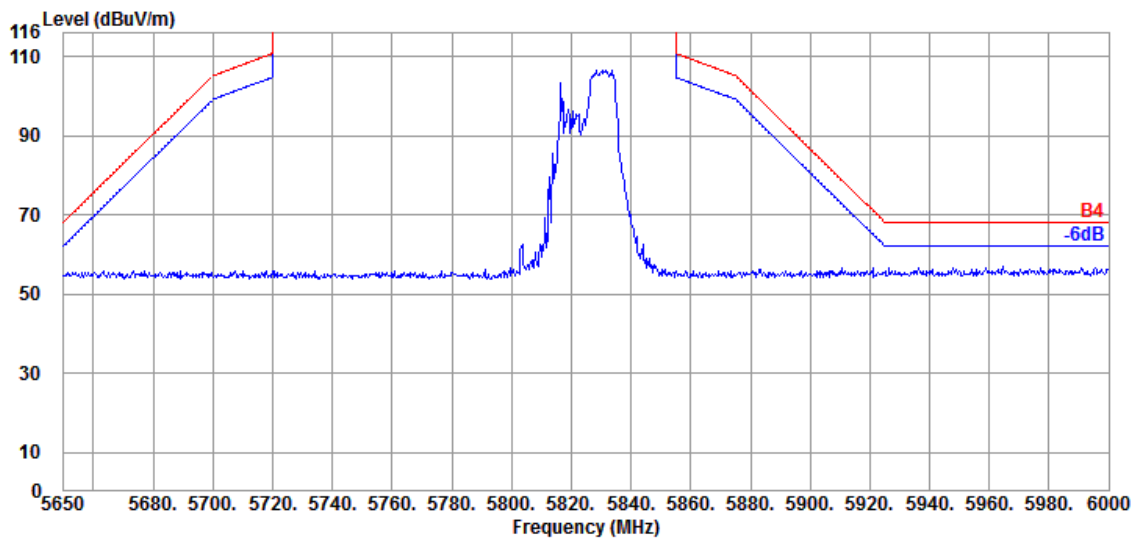


Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

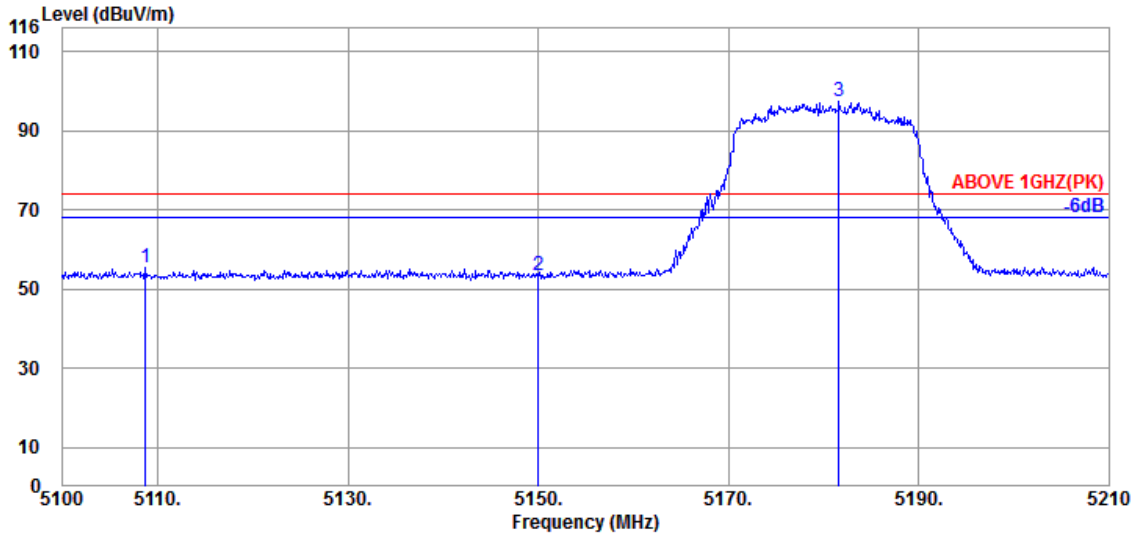

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.690	33.90	8.36	39.22	52.57	55.61	74.00	18.39	Peak
5150.050	34.10	8.39	39.21	50.08	53.36	74.00	20.64	Peak
@ 5181.620	34.23	8.41	39.21	93.87	97.30	---	---	Peak

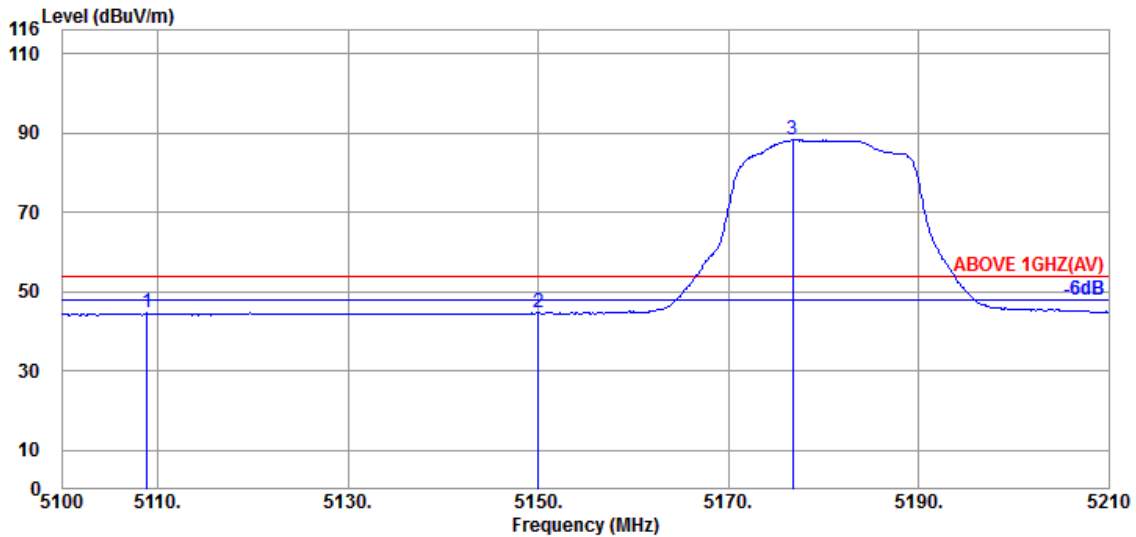


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.910	33.90	8.36	39.22	41.53	44.57	54.00	9.43	Average
5150.050	34.10	8.39	39.21	41.31	44.59	54.00	9.41	Average
@ 5176.780	34.23	8.41	39.21	84.82	88.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

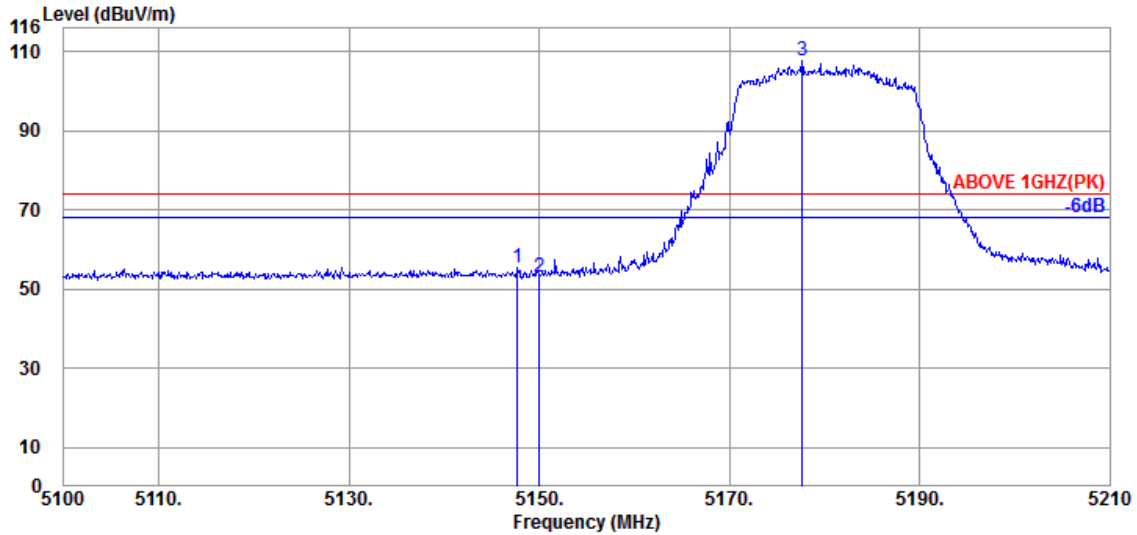

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.740	34.10	8.39	39.21	52.09	55.37	74.00	18.63	Peak
5150.050	34.10	8.39	39.21	49.87	53.15	74.00	20.85	Peak
@ 5177.660	34.23	8.41	39.21	104.09	107.52	---	---	Peak

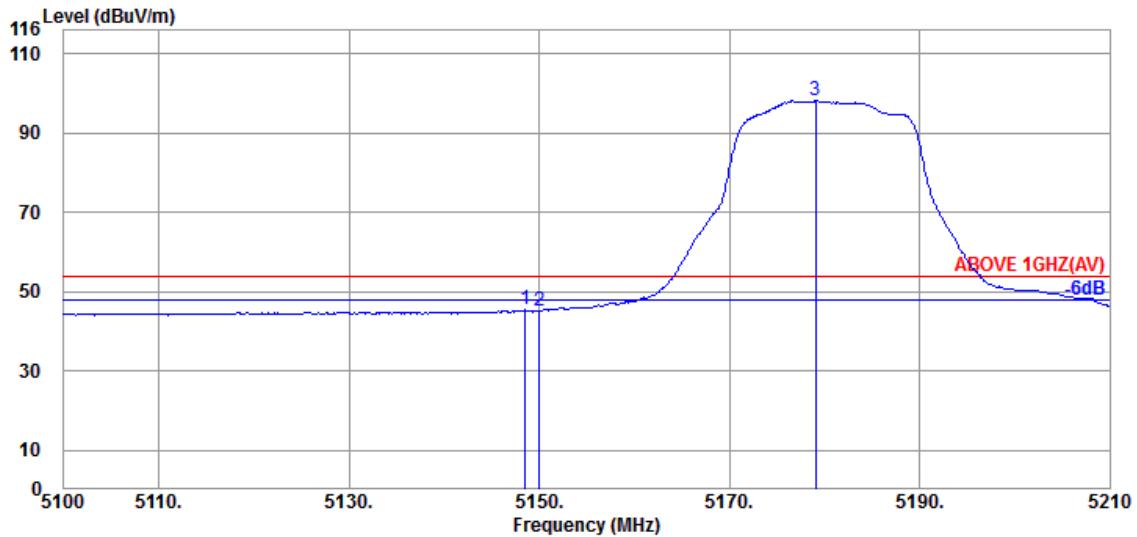


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	34.10	8.39	39.21	42.06	45.34	54.00	8.66	Average
5150.050	34.10	8.39	39.21	41.87	45.15	54.00	8.85	Average
@ 5179.090	34.23	8.41	39.21	94.67	98.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

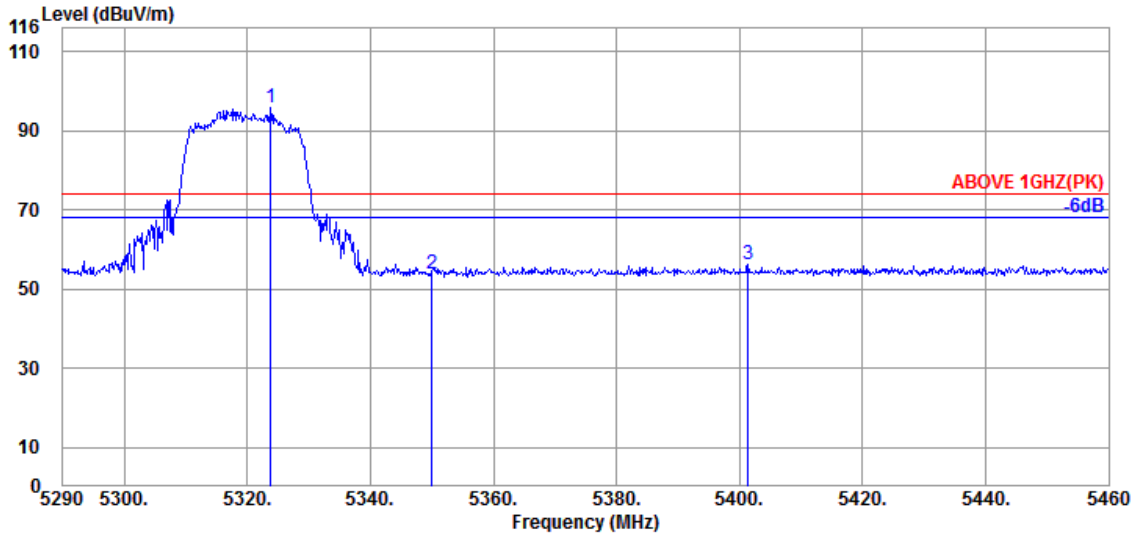

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.830	34.57	8.53	39.19	91.71	95.62	---	---	Peak
5350.010	34.60	8.56	39.19	50.02	53.99	74.00	20.01	Peak
5401.350	34.67	8.60	39.18	52.11	56.20	74.00	17.80	Peak

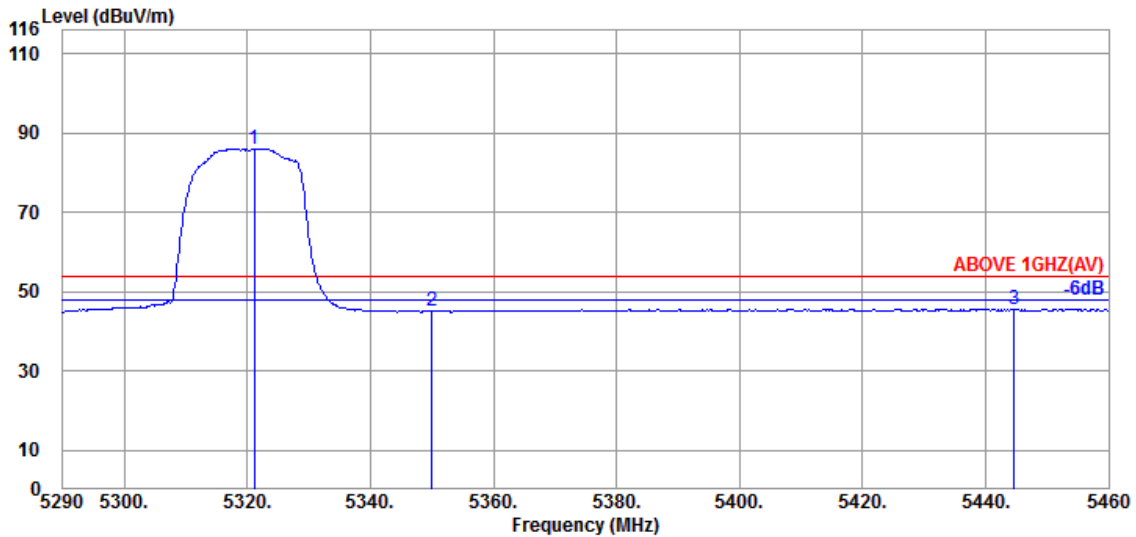


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.110	34.53	8.53	39.19	82.05	85.92	---	---	Average
5350.010	34.60	8.56	39.19	40.98	44.95	54.00	9.05	Average
5444.700	34.62	8.63	39.18	41.57	45.64	54.00	8.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

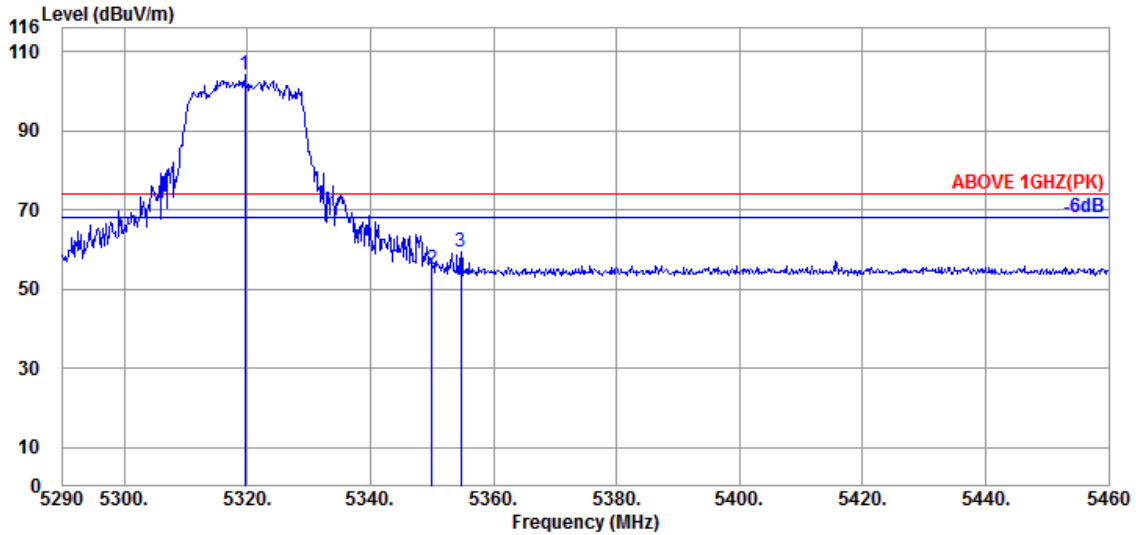

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.580	34.53	8.53	39.19	100.15	104.02	---	---	Peak
5350.010	34.60	8.56	39.19	51.19	55.16	74.00	18.84	Peak
5354.770	34.63	8.56	39.19	55.46	59.46	74.00	14.54	Peak

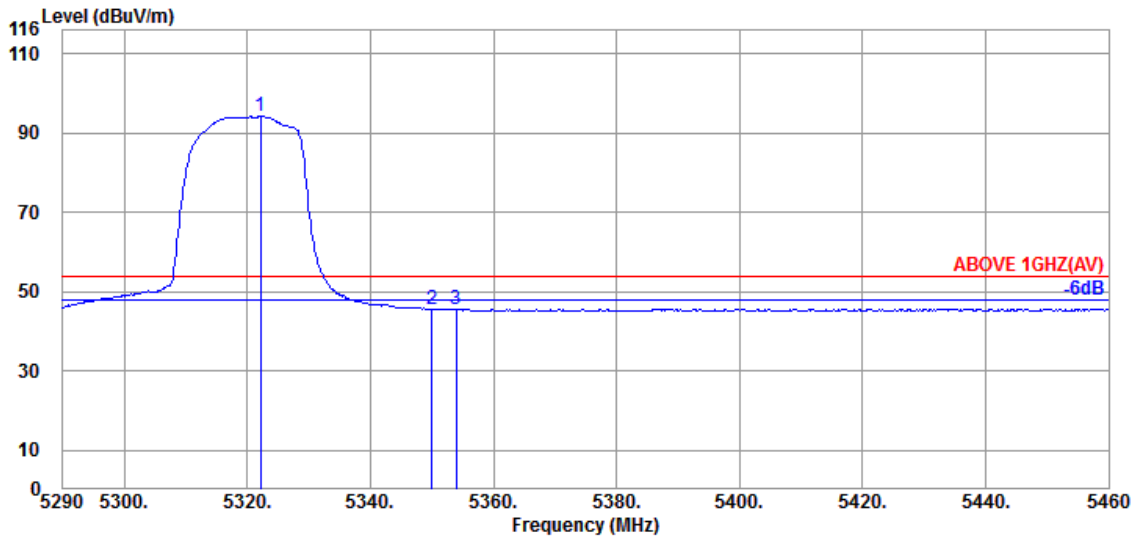


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.130	34.53	8.53	39.19	90.34	94.21	---	---	Average
5350.010	34.60	8.56	39.19	41.46	45.43	54.00	8.57	Average
5353.920	34.60	8.56	39.19	41.75	45.72	54.00	8.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

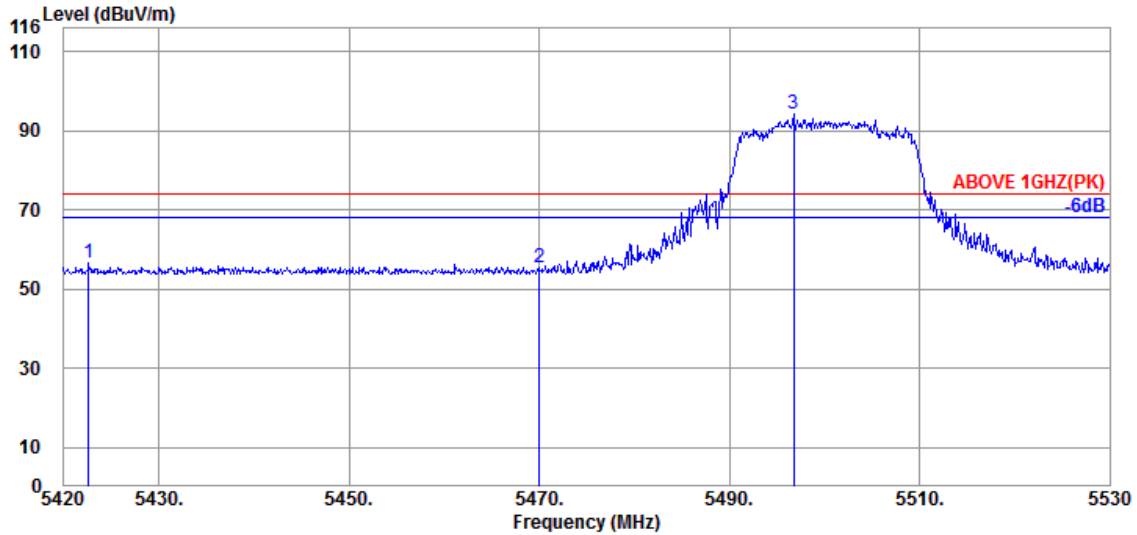

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.640	34.65	8.61	39.18	52.55	56.63	74.00	17.37	Peak
5470.050	34.57	8.65	39.17	51.28	55.33	74.00	18.67	Peak
@ 5496.780	34.50	8.68	39.17	90.16	94.17	---	---	Peak

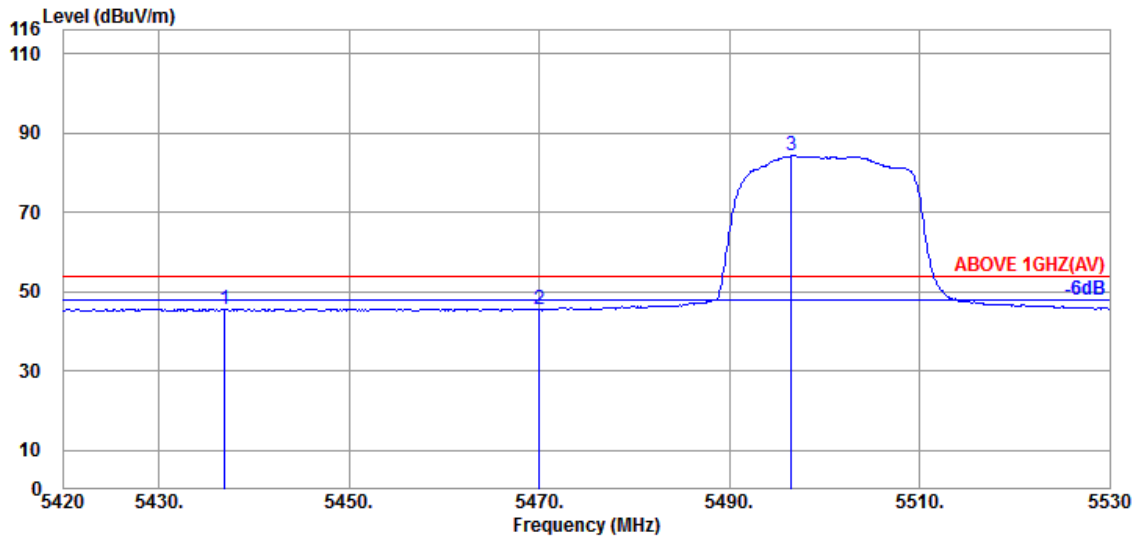


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.940	34.62	8.63	39.18	41.61	45.68	54.00	8.32	Average
5470.050	34.57	8.65	39.17	41.47	45.52	54.00	8.48	Average
@ 5496.560	34.50	8.68	39.17	80.23	84.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

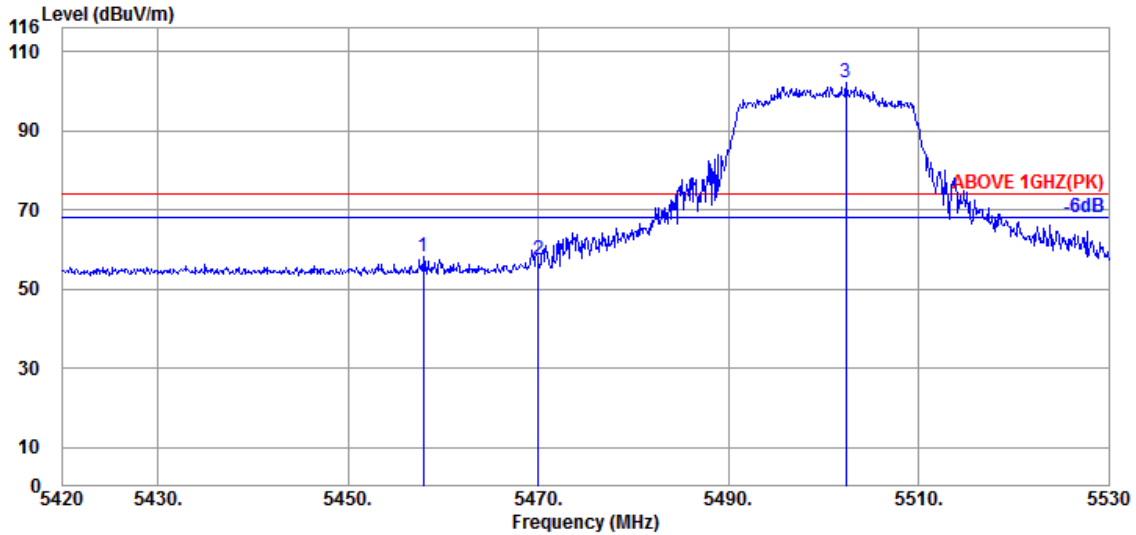

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.950	34.60	8.64	39.17	54.20	58.27	74.00	15.73	Peak
5470.050	34.57	8.65	39.17	53.35	57.40	74.00	16.60	Peak
@ 5502.390	34.50	8.68	39.17	97.96	101.97	---	---	Peak

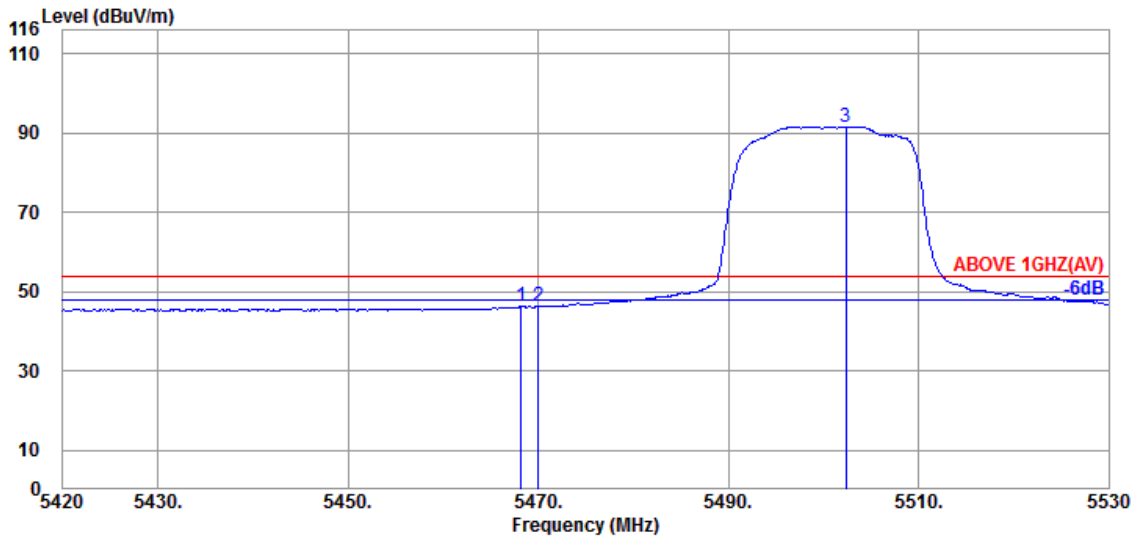


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.180	34.57	8.65	39.17	42.27	46.32	54.00	7.68	Average
5470.050	34.57	8.65	39.17	42.26	46.31	54.00	7.69	Average
@ 5502.390	34.50	8.68	39.17	87.55	91.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/62	Frequency	TX 5670MHz

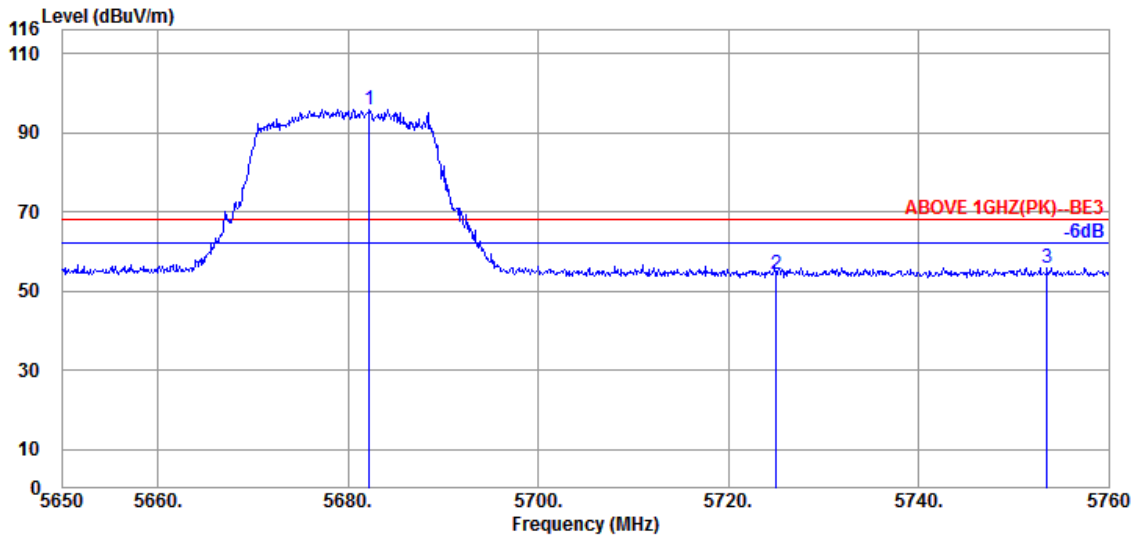

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.230	34.53	8.82	39.22	91.76	95.89	---	---	Peak
5725.020	34.50	8.86	39.23	50.13	54.26	68.20	13.94	Peak
5753.510	34.50	8.89	39.24	51.83	55.98	68.20	12.22	Peak

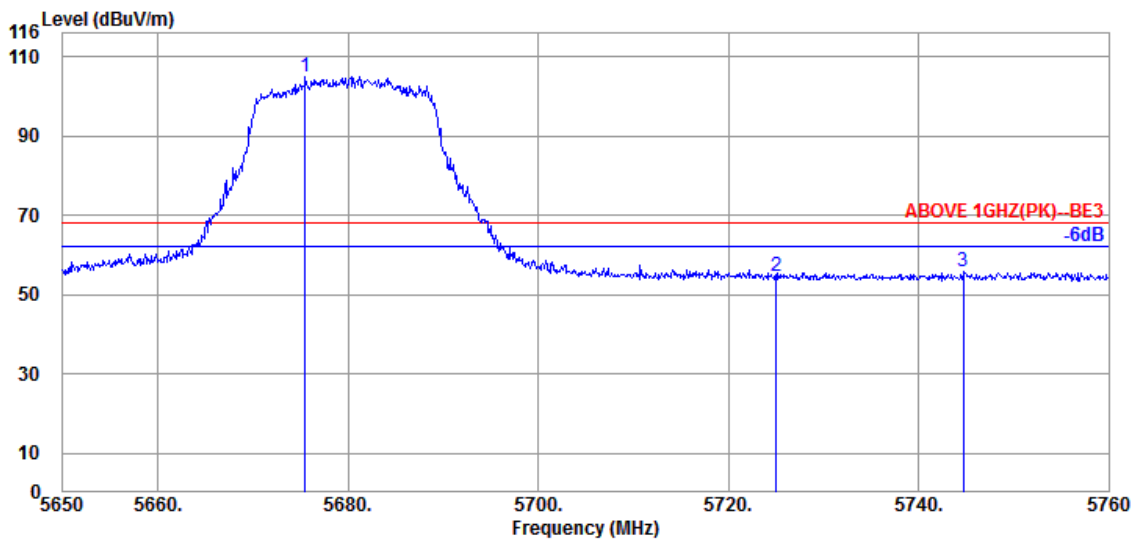


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.520	34.53	8.82	39.22	100.84	104.97	---	---	Peak
5725.020	34.50	8.86	39.23	50.41	54.54	68.20	13.66	Peak
5744.710	34.50	8.88	39.23	51.49	55.64	68.20	12.56	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

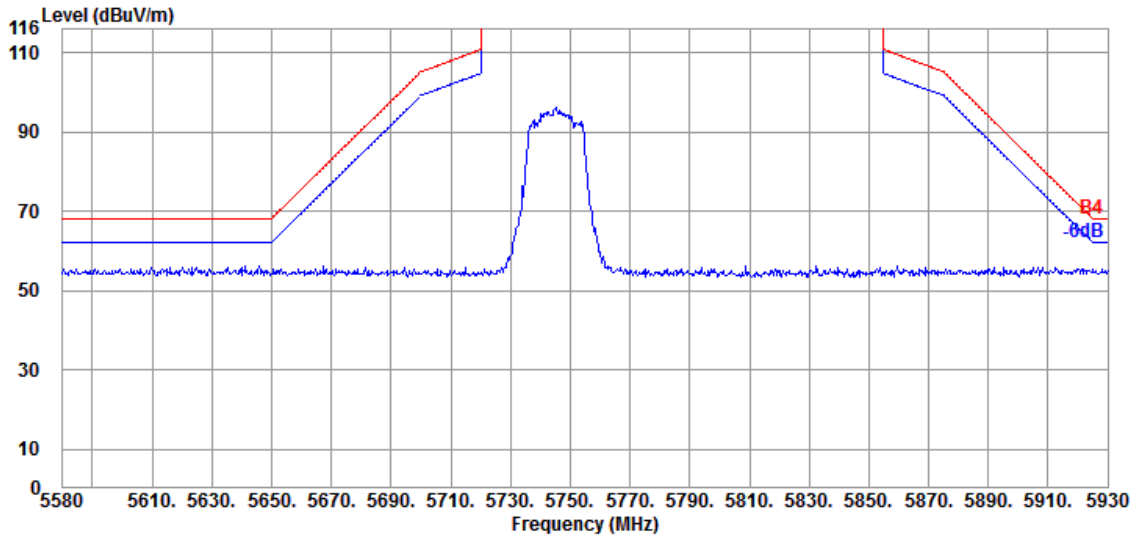


Antenna at Vertical Polarization

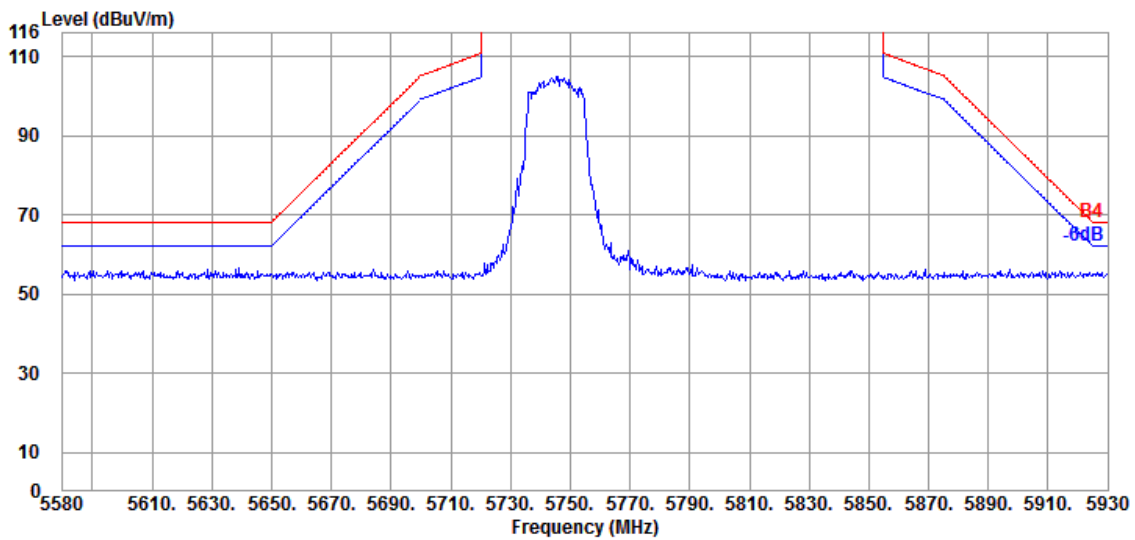


Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/62	Frequency	TX 5795MHz


### Antenna at Horizontal Polarization

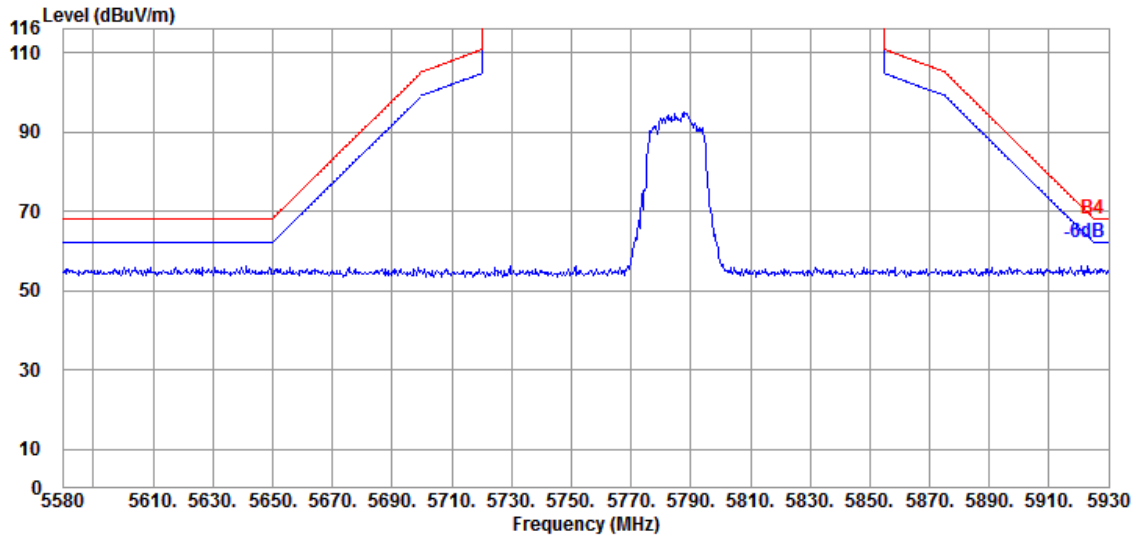

### Antenna at Vertical Polarization

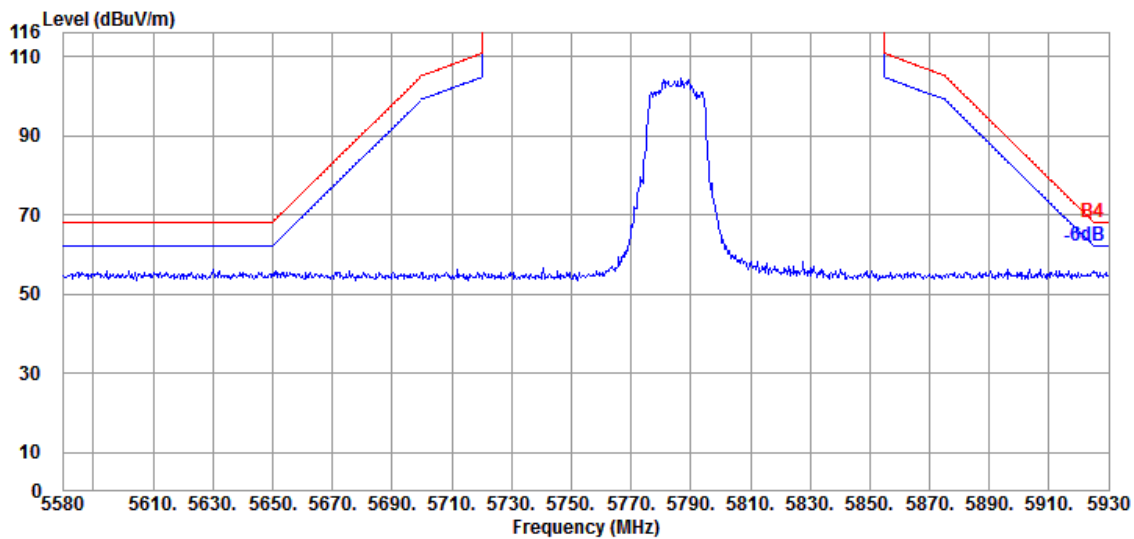


Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

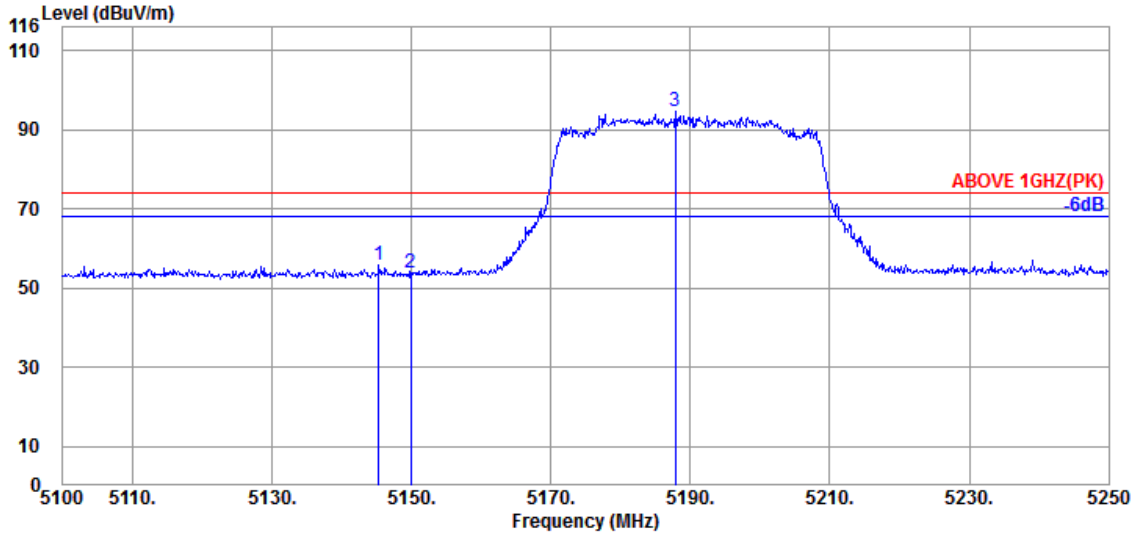

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	34.10	8.39	39.21	52.60	55.88	74.00	18.12	Peak
5149.950	34.10	8.39	39.21	50.70	53.98	74.00	20.02	Peak
@ 5187.900	34.30	8.41	39.21	91.09	94.59	---	---	Peak

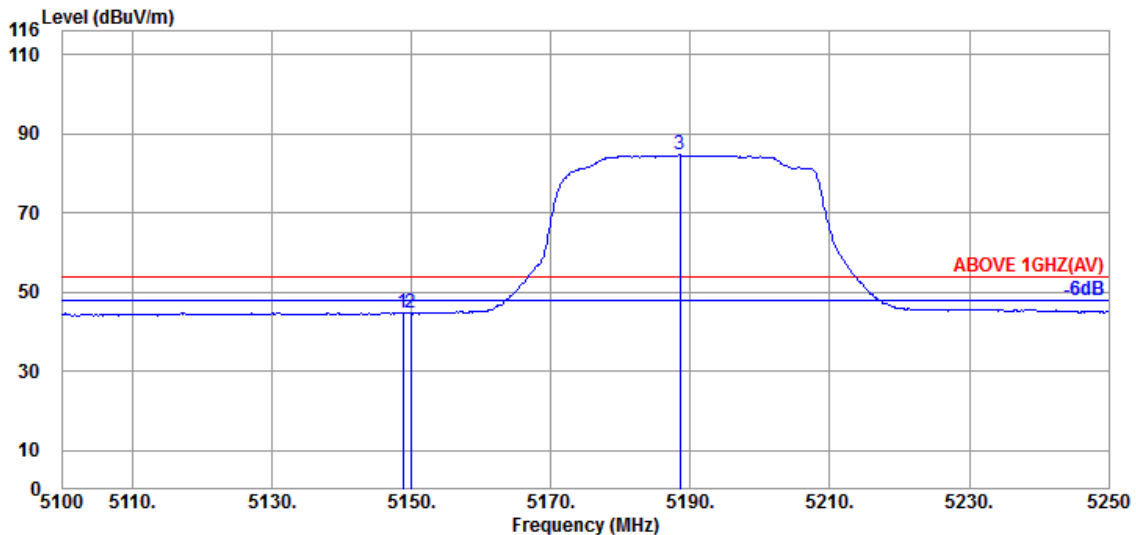


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.10	8.39	39.21	41.51	44.79	54.00	9.21	Average
5149.950	34.10	8.39	39.21	41.33	44.61	54.00	9.39	Average
@ 5188.500	34.30	8.41	39.21	81.13	84.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

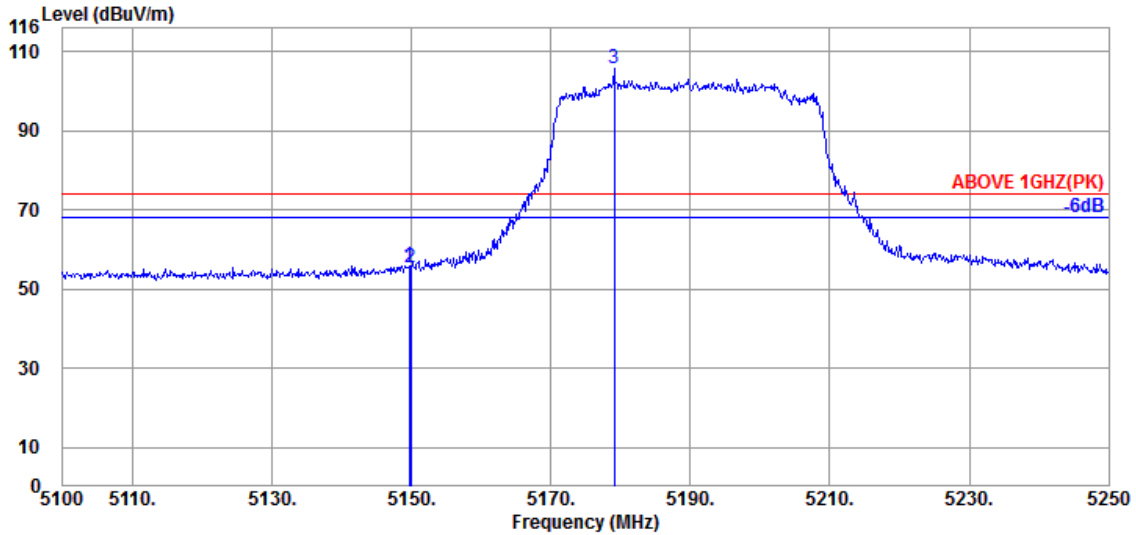

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.10	8.39	39.21	52.51	55.79	74.00	18.21	Peak
5149.950	34.10	8.39	39.21	52.16	55.44	74.00	18.56	Peak
@ 5179.050	34.23	8.41	39.21	102.09	105.52	---	---	Peak

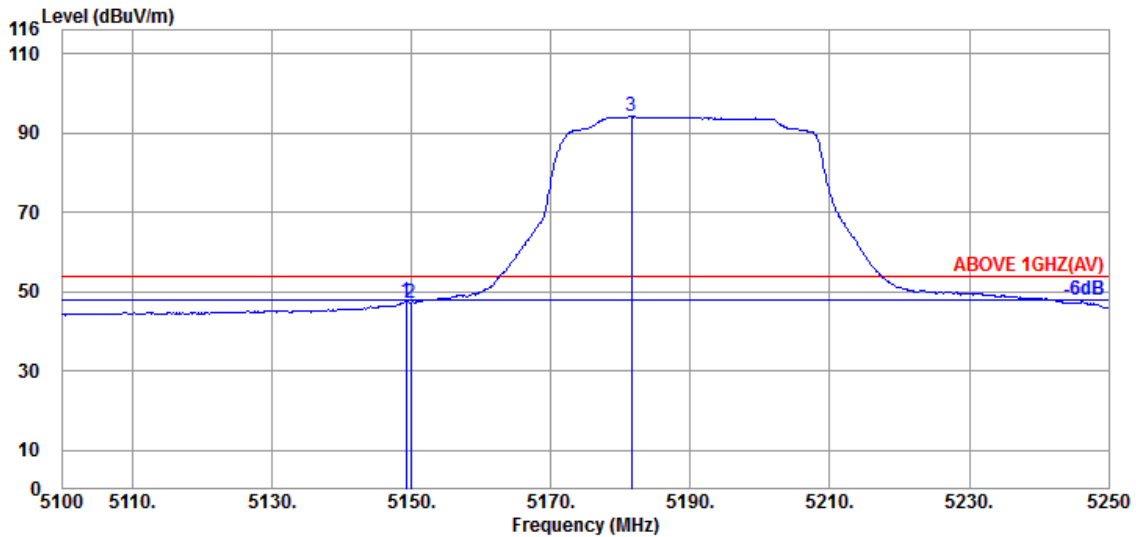


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.10	8.39	39.21	44.33	47.61	54.00	6.39	Average
5149.950	34.10	8.39	39.21	43.92	47.20	54.00	6.80	Average
@ 5181.600	34.23	8.41	39.21	90.65	94.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

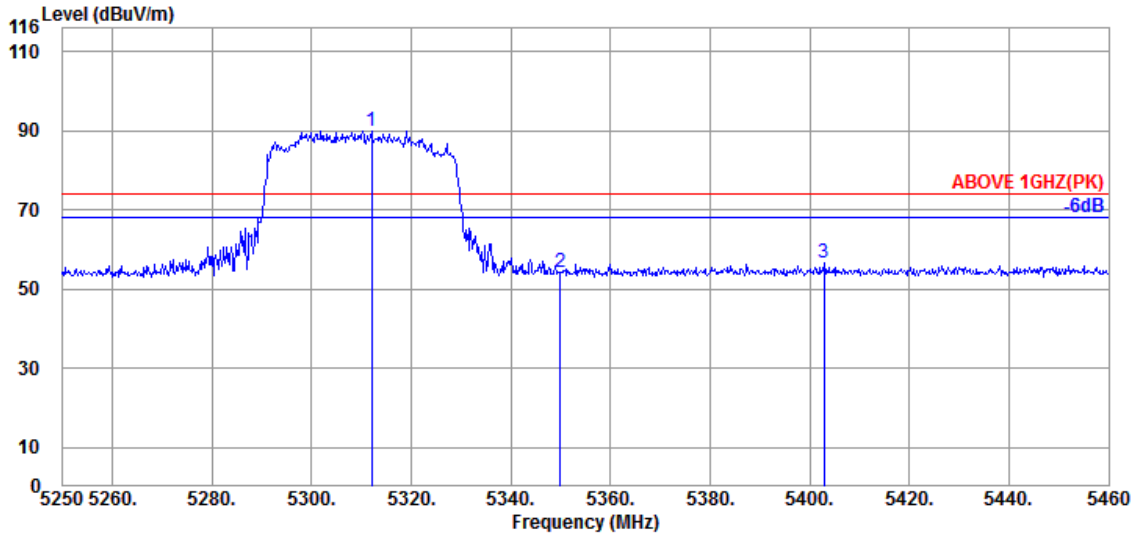

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.950	34.53	8.53	39.19	85.99	89.86	---	---	Peak
5349.960	34.60	8.56	39.19	50.45	54.42	74.00	19.58	Peak
5402.880	34.67	8.60	39.18	52.58	56.67	74.00	17.33	Peak

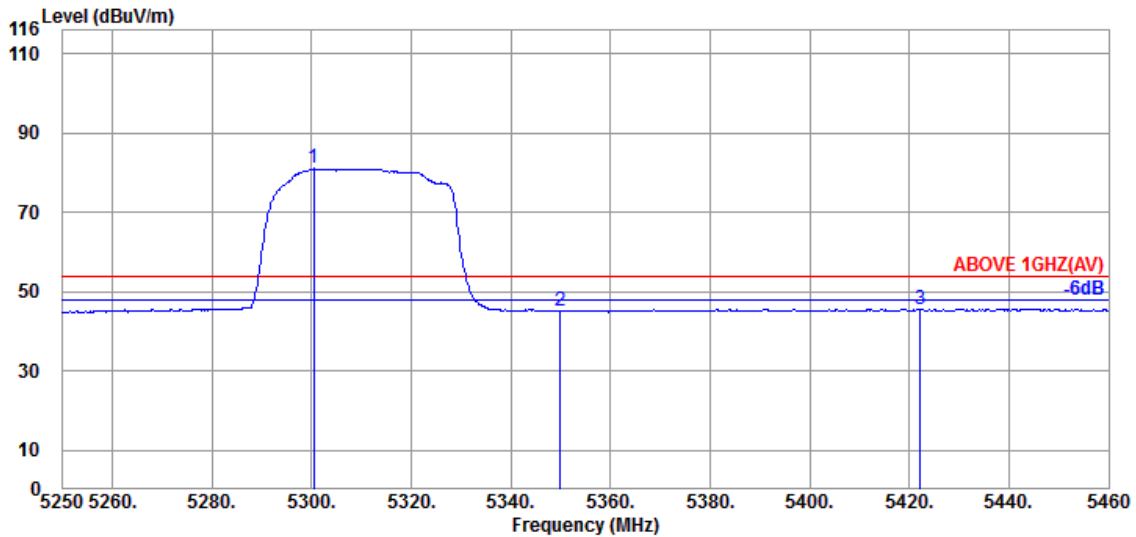


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.400	34.50	8.51	39.19	77.21	81.03	---	---	Average
5349.960	34.60	8.56	39.19	41.06	45.03	54.00	8.97	Average
5422.200	34.65	8.61	39.18	41.52	45.60	54.00	8.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

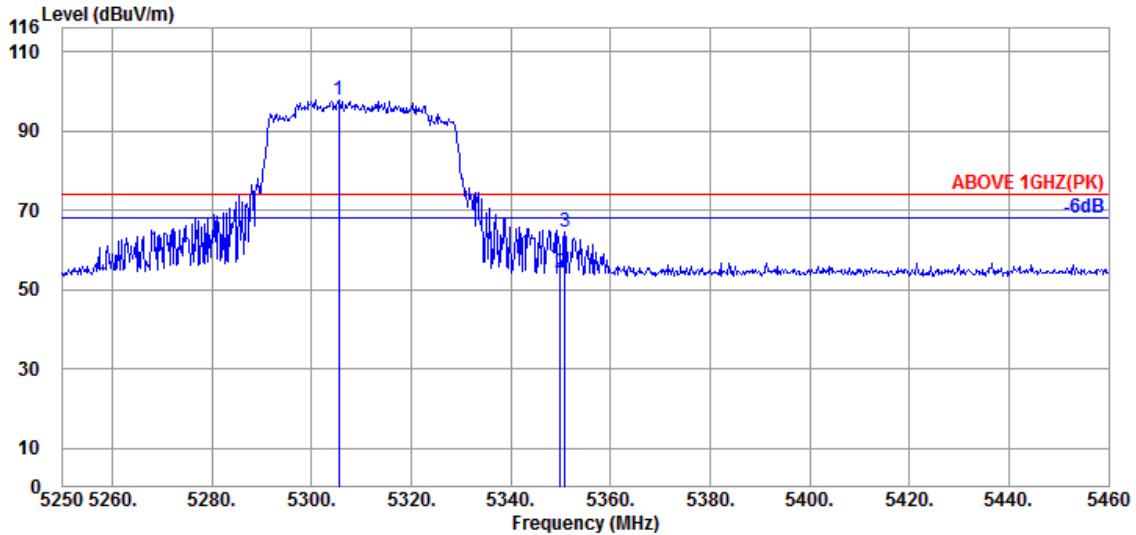

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.440	34.50	8.51	39.19	93.98	97.80	---	---	Peak
5349.960	34.60	8.56	39.19	50.34	54.31	74.00	19.69	Peak
5350.800	34.60	8.56	39.19	60.60	64.57	74.00	9.43	Peak

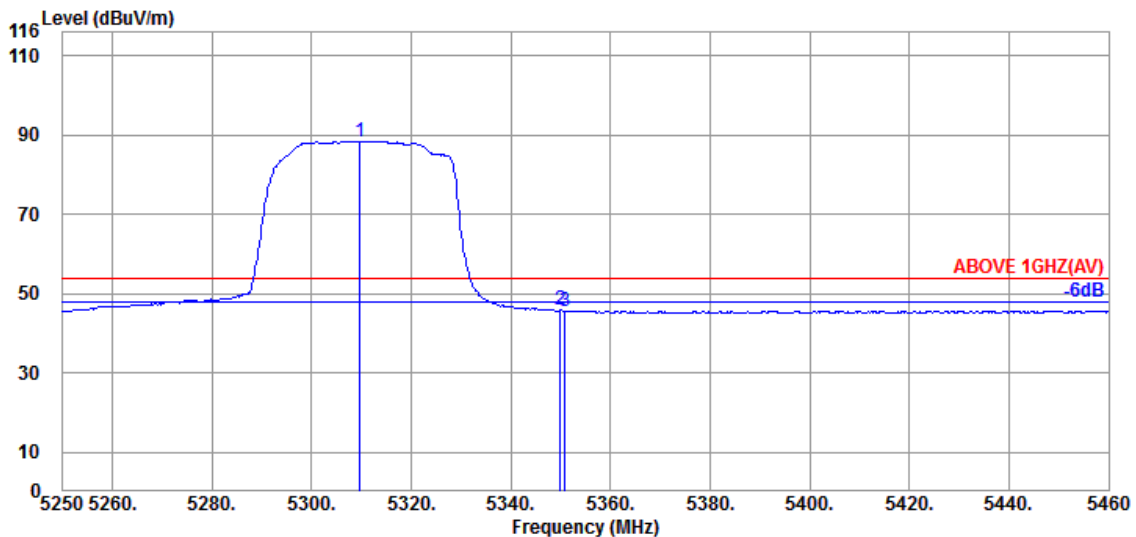


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.640	34.53	8.53	39.19	84.52	88.39	---	---	Average
5349.960	34.60	8.56	39.19	41.81	45.78	54.00	8.22	Average
5350.800	34.60	8.56	39.19	41.71	45.68	54.00	8.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

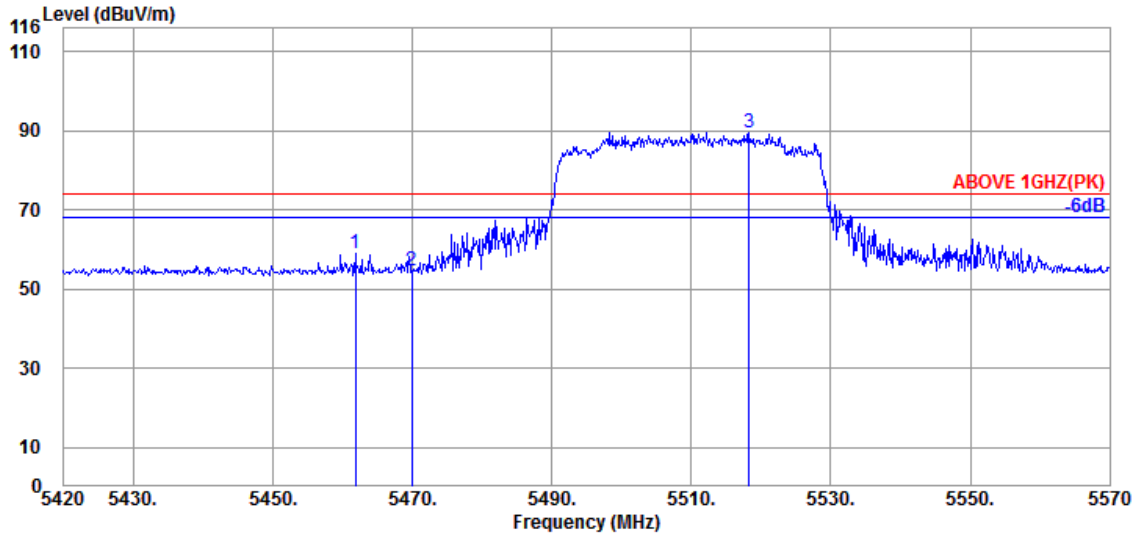

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.850	34.60	8.64	39.17	54.78	58.85	74.00	15.15	Peak
5469.950	34.57	8.65	39.17	50.70	54.75	74.00	19.25	Peak
@ 5518.250	34.53	8.70	39.17	85.40	89.46	---	---	Peak

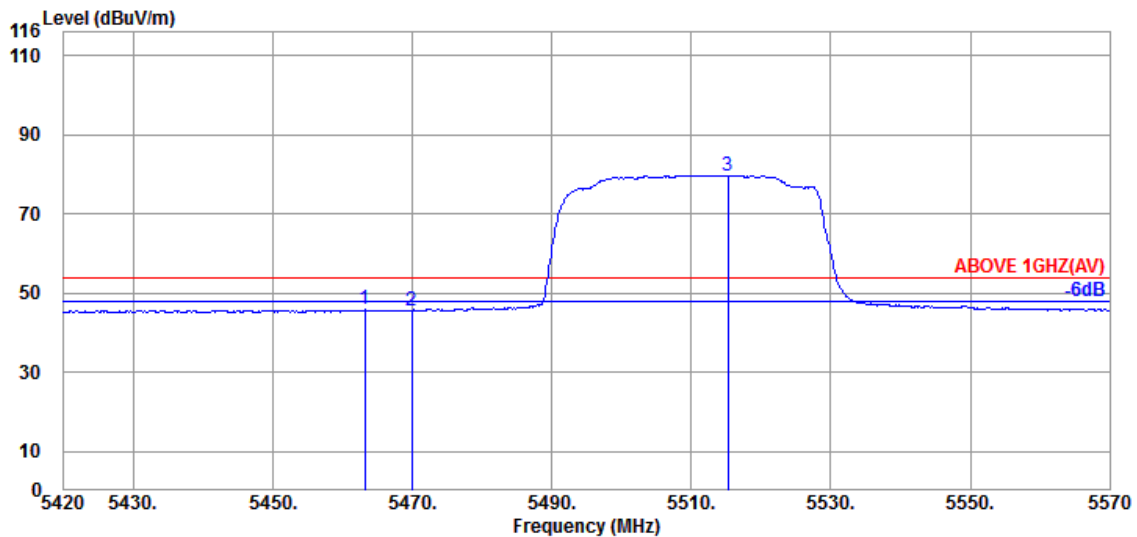


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.200	34.60	8.65	39.17	41.67	45.75	54.00	8.25	Average
5469.950	34.57	8.65	39.17	41.53	45.58	54.00	8.42	Average
@ 5515.250	34.53	8.70	39.17	75.66	79.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	UNII Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

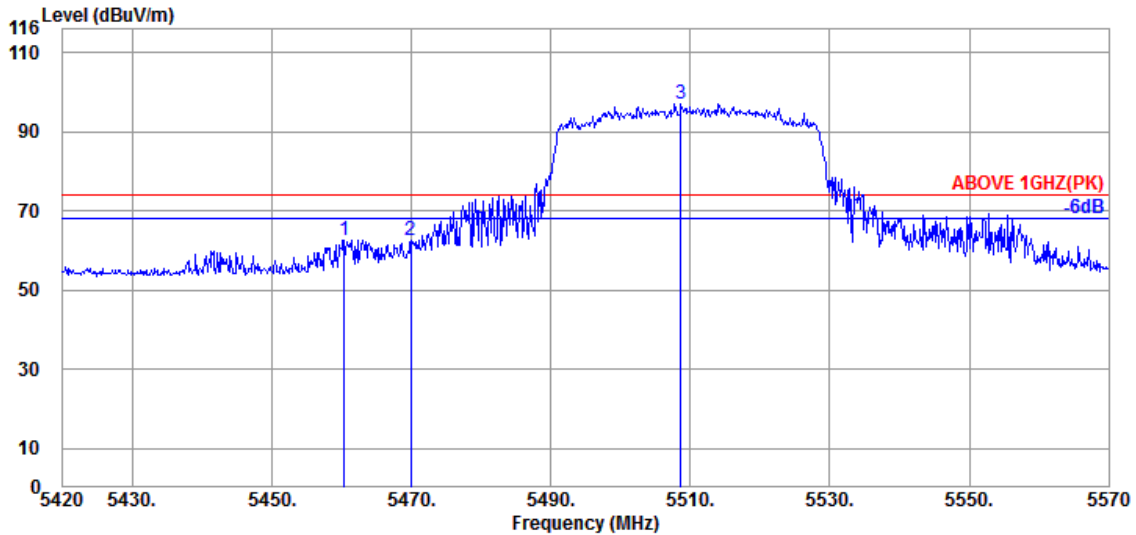

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.350	34.60	8.64	39.17	58.68	62.75	74.00	11.25	Peak
5469.950	34.57	8.65	39.17	58.68	62.73	74.00	11.27	Peak
@ 5508.650	34.50	8.68	39.17	92.90	96.91	---	---	Peak

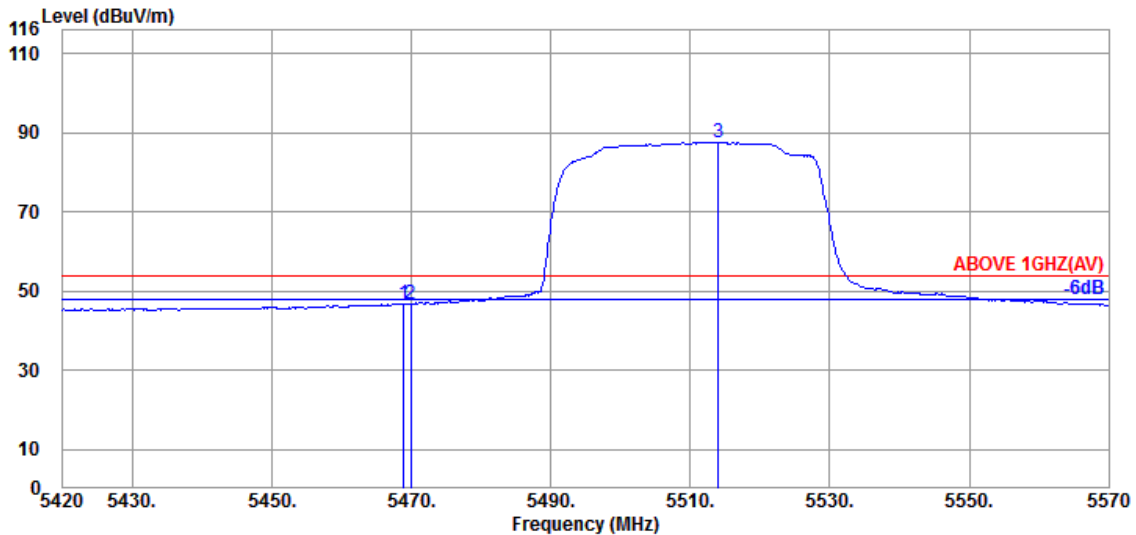


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.57	8.65	39.17	42.78	46.83	54.00	7.17	Average
5469.950	34.57	8.65	39.17	42.55	46.60	54.00	7.40	Average
@ 5514.050	34.53	8.70	39.17	83.51	87.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
RU Configuration	484/66	Frequency	TX 5610MHz

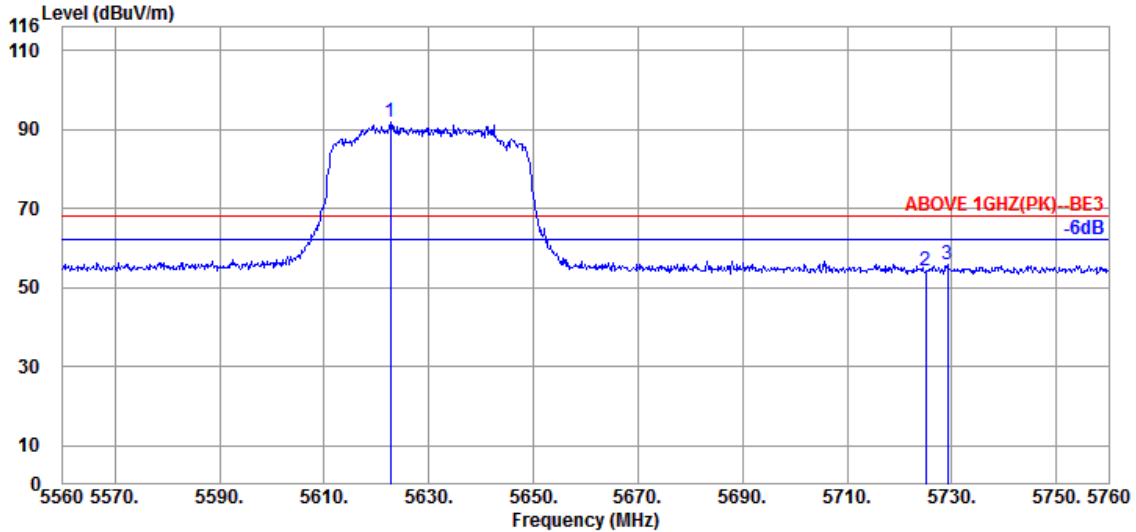

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.600	34.60	8.78	39.20	87.68	91.86	---	---	Peak
5725.000	34.50	8.86	39.23	50.03	54.16	68.20	14.04	Peak
5729.200	34.50	8.86	39.23	51.57	55.70	68.20	12.50	Peak

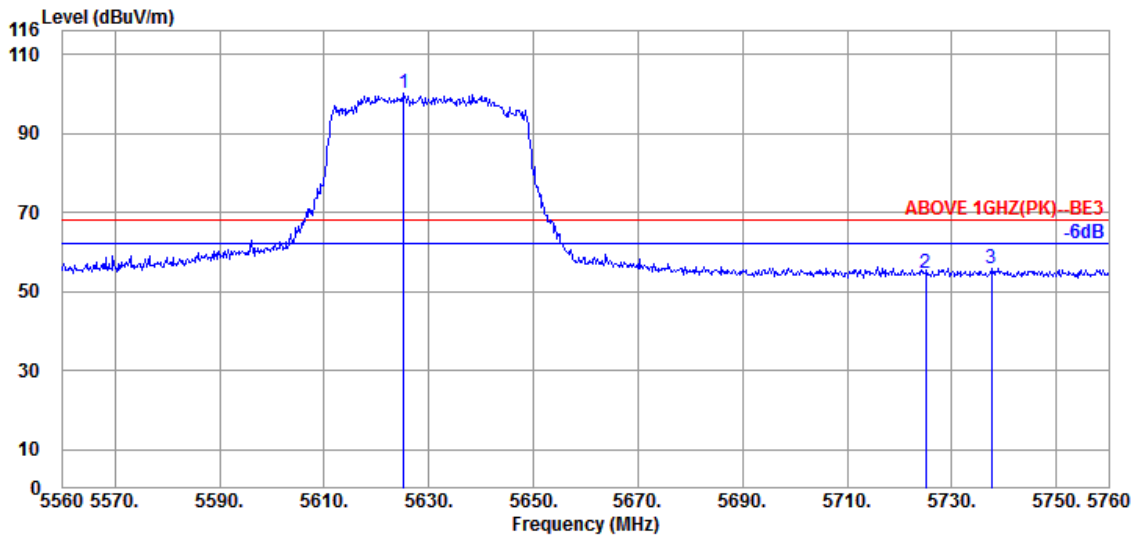


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.200	34.60	8.78	39.20	96.02	100.20	---	---	Peak
5725.000	34.50	8.86	39.23	50.40	54.53	68.20	13.67	Peak
5737.600	34.50	8.88	39.23	51.72	55.87	68.20	12.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/65	Frequency	TX 5775MHz

### Antenna at Horizontal Polarization

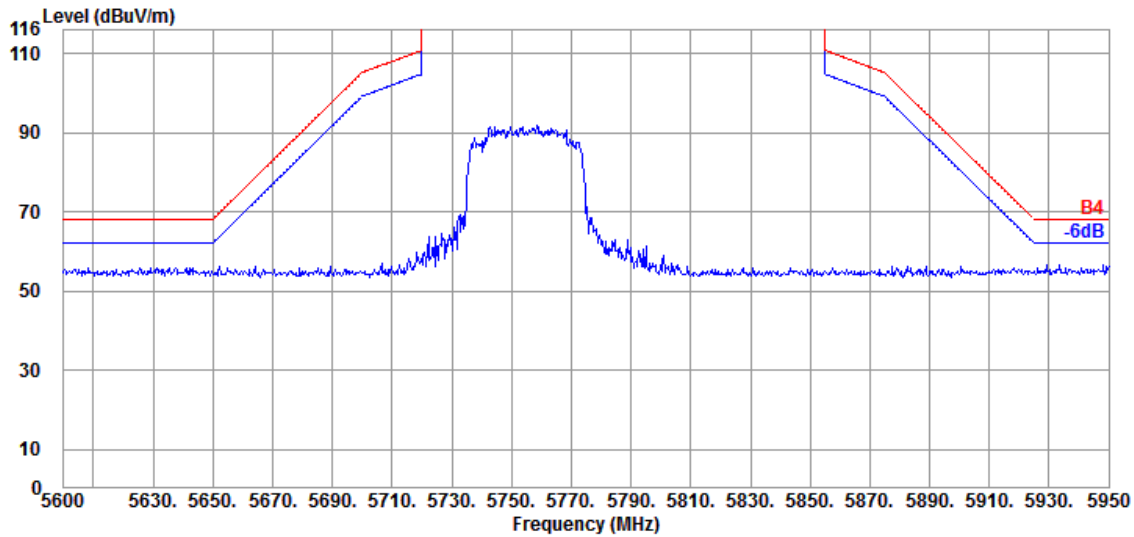


### Antenna at Vertical Polarization

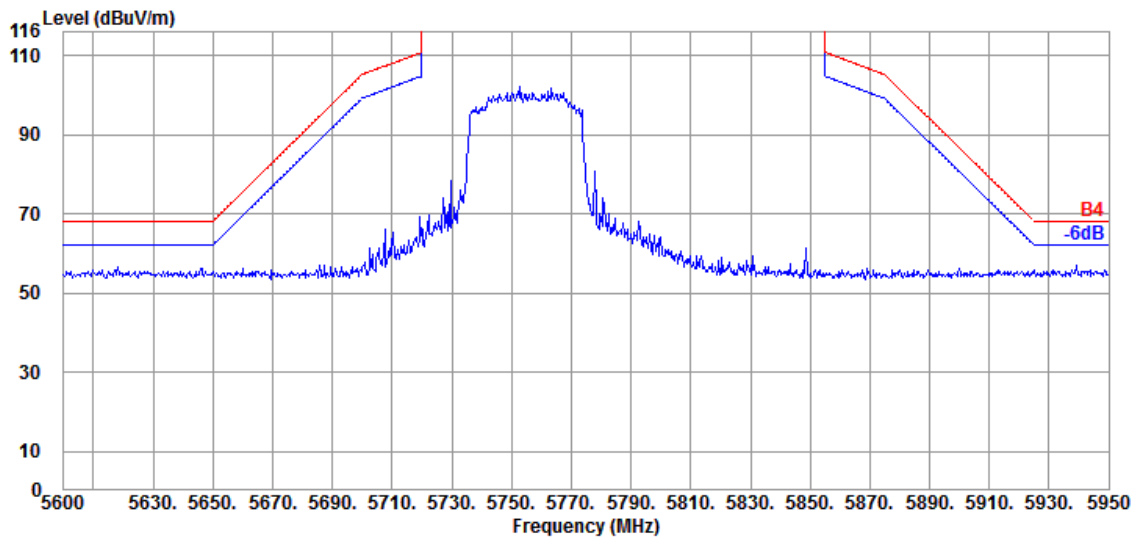


Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

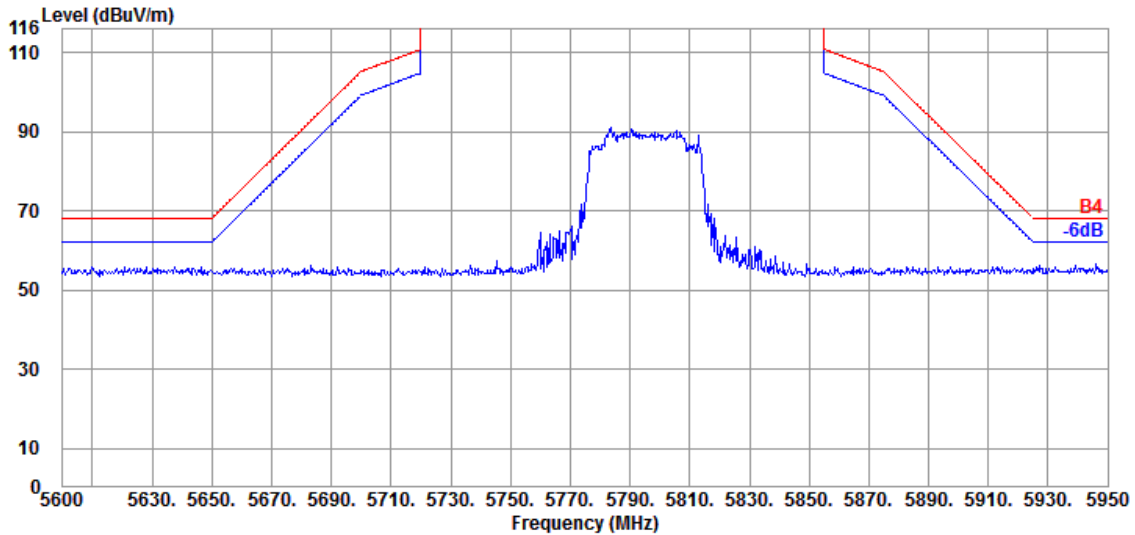

Antenna at Vertical Polarization

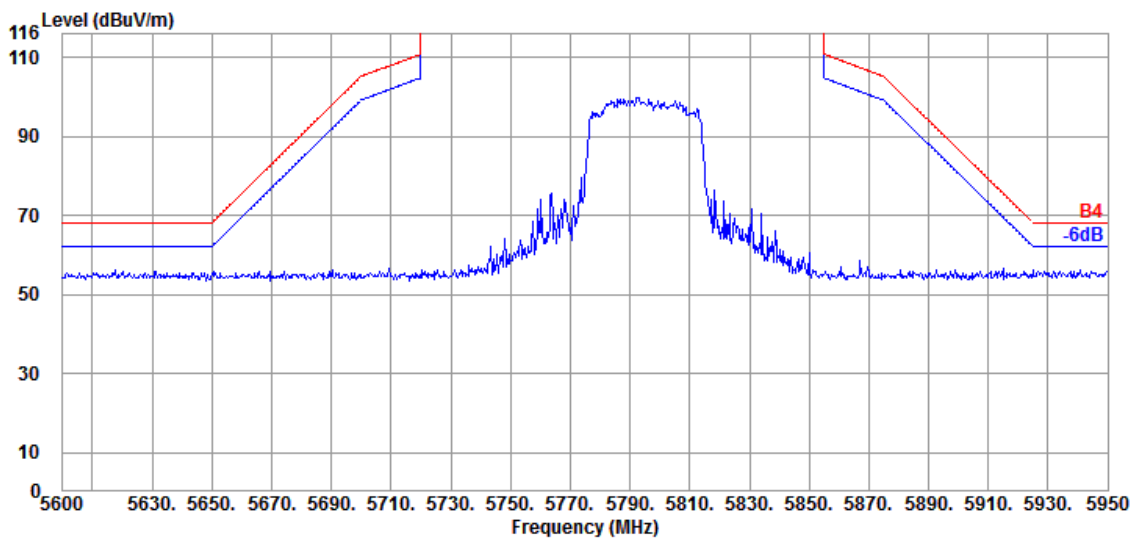


Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

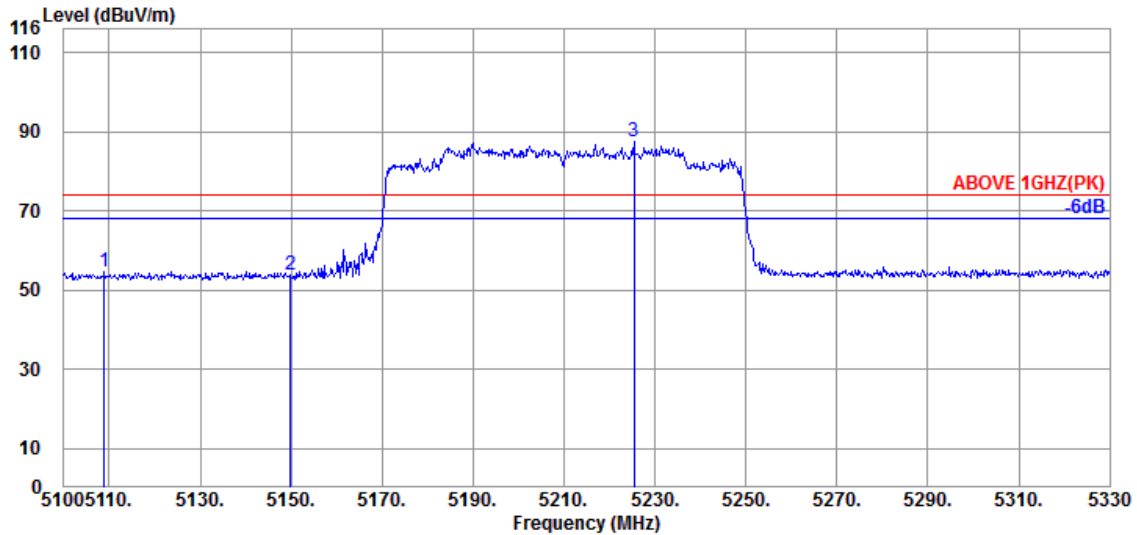

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.970	33.90	8.36	39.22	51.71	54.75	74.00	19.25	Peak
5149.910	34.10	8.39	39.21	50.49	53.77	74.00	20.23	Peak
@ 5225.350	34.40	8.46	39.20	83.75	87.41	---	---	Peak

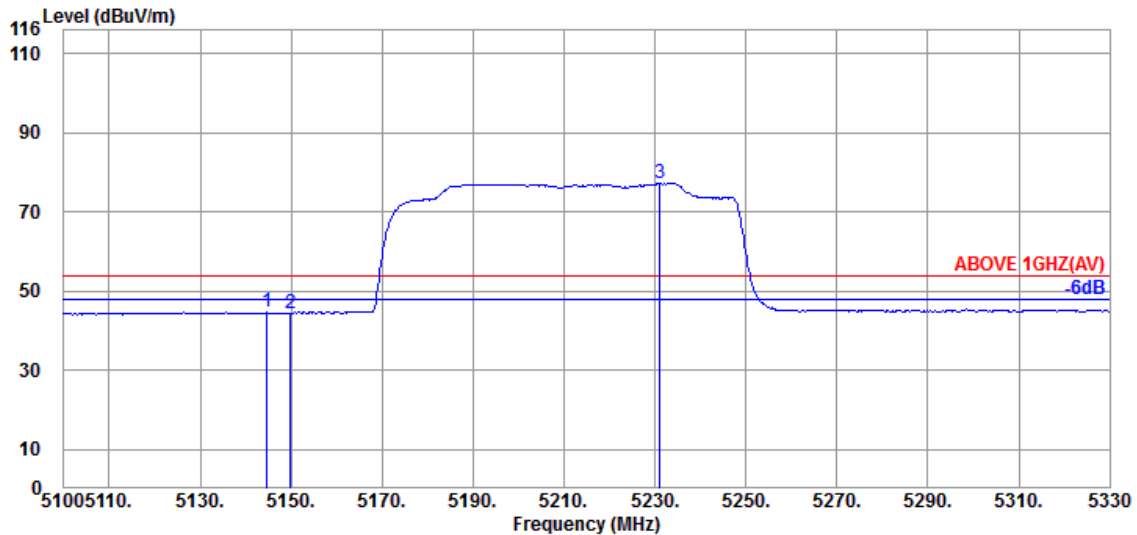


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.620	34.10	8.39	39.21	41.30	44.58	54.00	9.42	Average
5149.910	34.10	8.39	39.21	41.14	44.42	54.00	9.58	Average
@ 5231.100	34.40	8.46	39.20	73.50	77.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

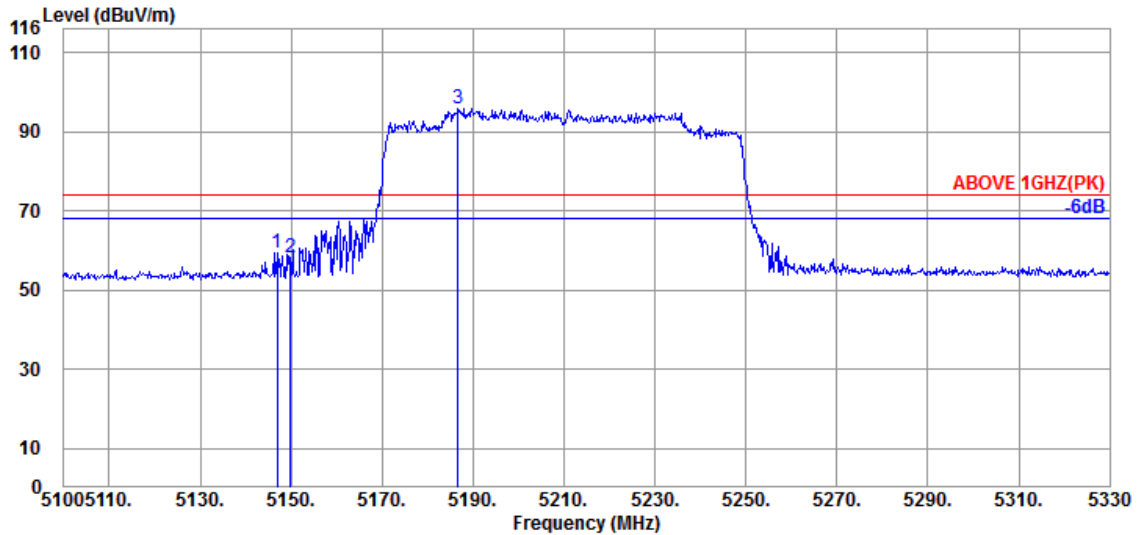

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.920	34.10	8.39	39.21	56.18	59.46	74.00	14.54	Peak
5149.910	34.10	8.39	39.21	55.11	58.39	74.00	15.61	Peak
@ 5186.710	34.30	8.41	39.21	92.36	95.86	---	---	Peak

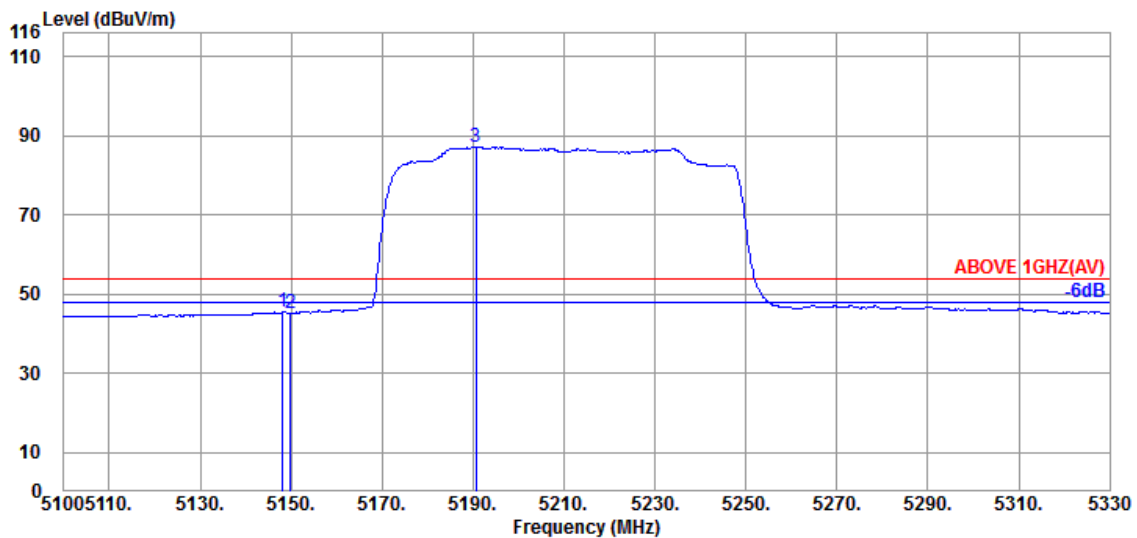


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.070	34.10	8.39	39.21	42.13	45.41	54.00	8.59	Average
5149.910	34.10	8.39	39.21	41.96	45.24	54.00	8.76	Average
@ 5190.620	34.30	8.43	39.21	83.48	87.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

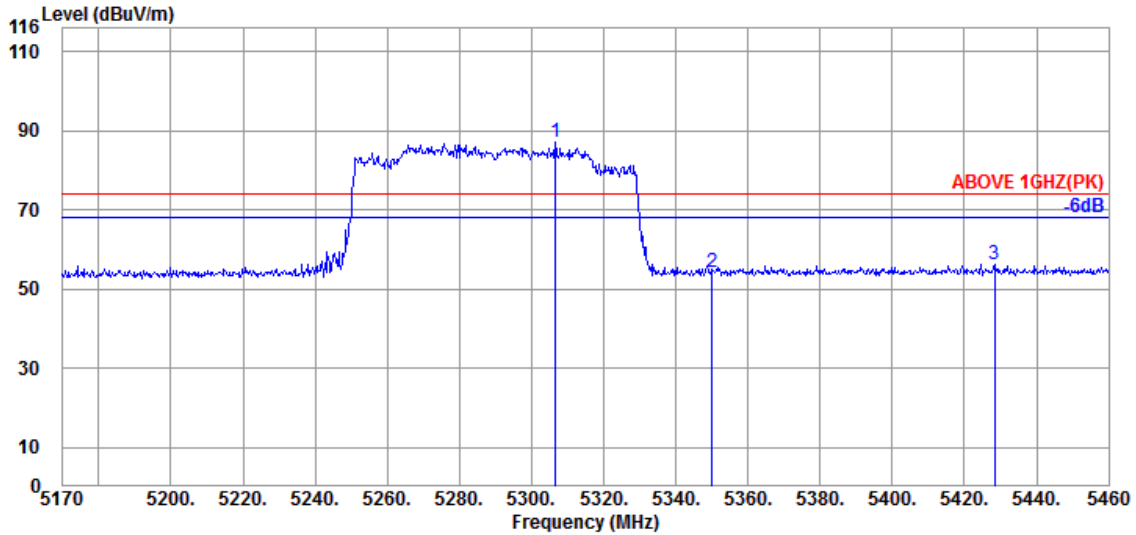

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.590	34.50	8.51	39.19	83.36	87.18	---	---	Peak
5350.090	34.60	8.56	39.19	50.10	54.07	74.00	19.93	Peak
5428.390	34.65	8.61	39.18	52.19	56.27	74.00	17.73	Peak

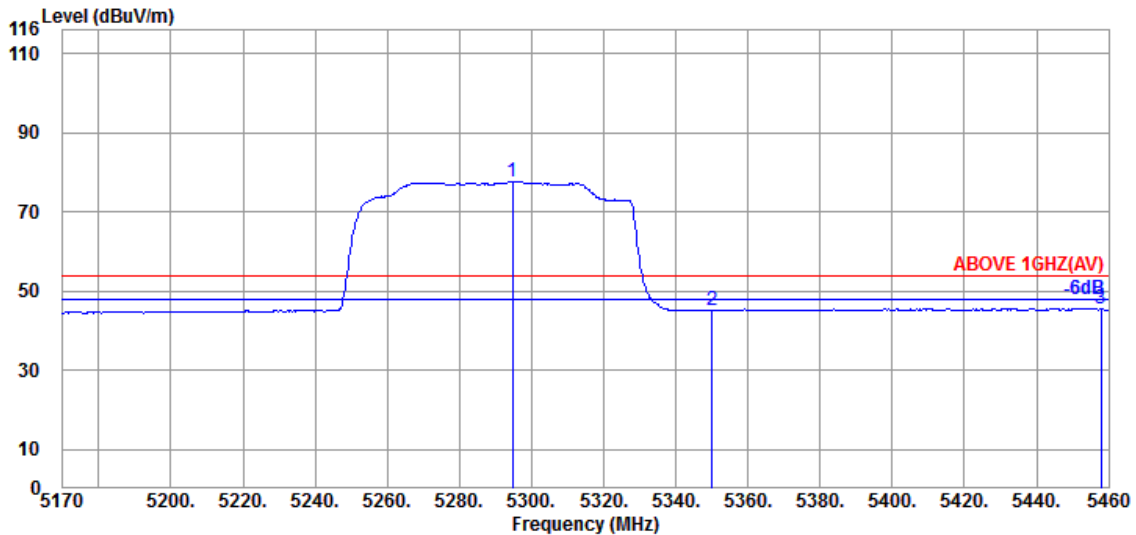


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.700	34.50	8.51	39.19	73.76	77.58	---	---	Average
5350.090	34.60	8.56	39.19	41.13	45.10	54.00	8.90	Average
5457.970	34.60	8.64	39.17	41.55	45.62	54.00	8.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

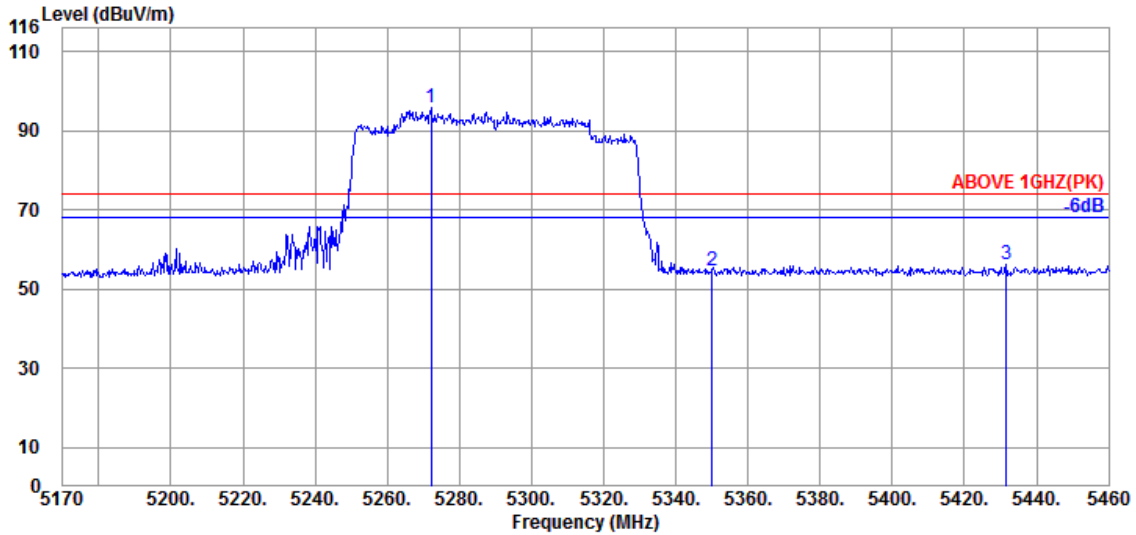

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.080	34.50	8.49	39.20	91.87	95.66	---	---	Peak
5350.090	34.60	8.56	39.19	50.77	54.74	74.00	19.26	Peak
5431.580	34.65	8.63	39.18	51.93	56.03	74.00	17.97	Peak

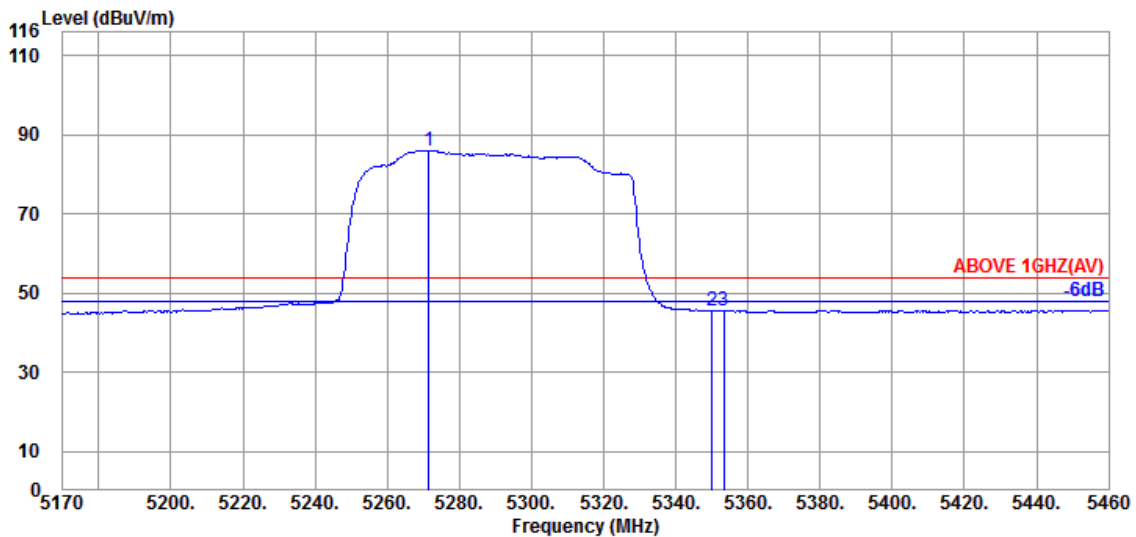


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5271.500	34.50	8.49	39.20	82.18	85.97	---	---	Average
5350.090	34.60	8.56	39.19	41.49	45.46	54.00	8.54	Average
5353.280	34.60	8.56	39.19	41.71	45.68	54.00	8.32	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

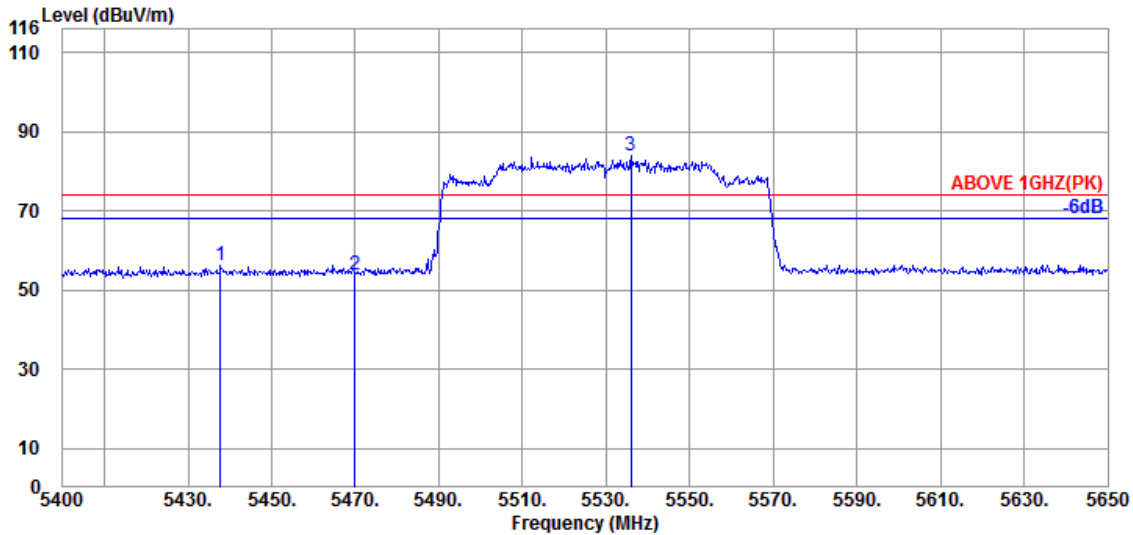

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.750	34.62	8.63	39.18	52.18	56.25	74.00	17.75	Peak
5470.000	34.57	8.65	39.17	49.75	53.80	74.00	20.20	Peak
@ 5536.000	34.57	8.71	39.18	79.79	83.89	---	---	Peak

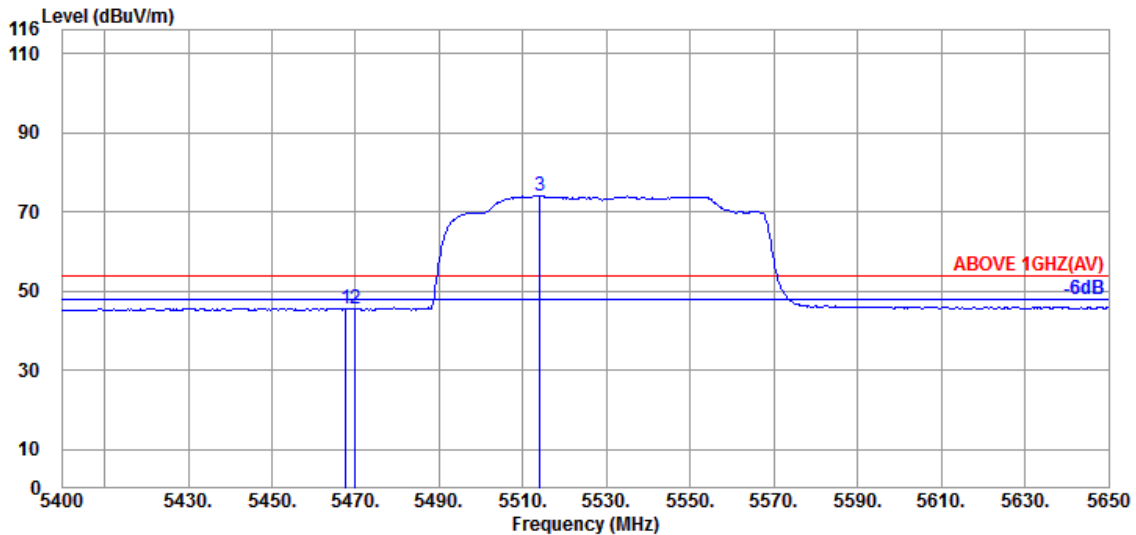


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.57	8.65	39.17	41.58	45.63	54.00	8.37	Average
5470.000	34.57	8.65	39.17	41.31	45.36	54.00	8.64	Average
@ 5514.000	34.53	8.70	39.17	69.94	74.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

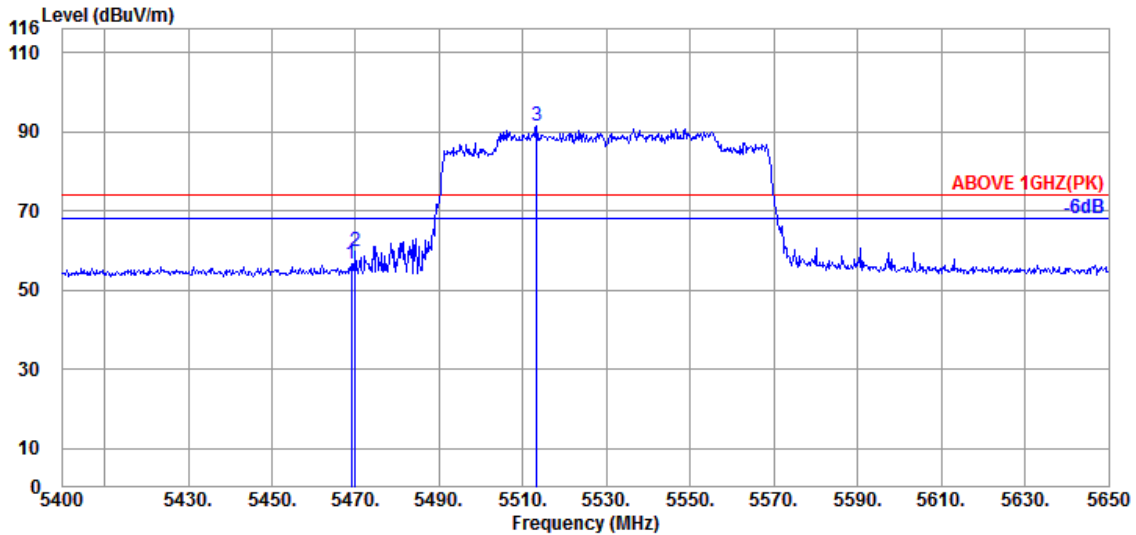

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.57	8.65	39.17	52.45	56.50	74.00	17.50	Peak
5470.000	34.57	8.65	39.17	55.64	59.69	74.00	14.31	Peak
@ 5513.250	34.53	8.68	39.17	87.23	91.27	---	---	Peak

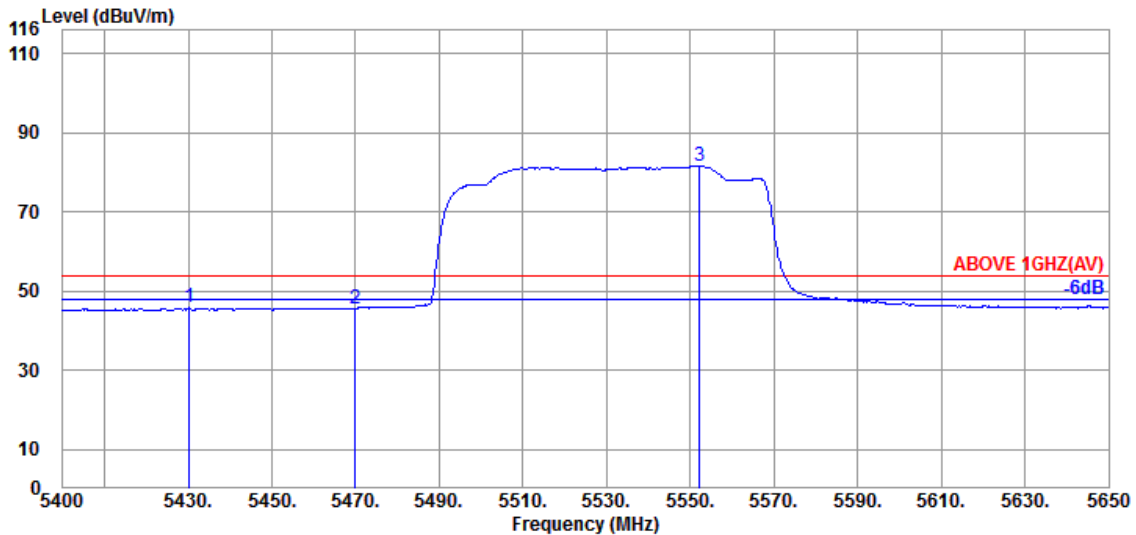


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.250	34.65	8.63	39.18	41.64	45.74	54.00	8.26	Average
5470.000	34.57	8.65	39.17	41.56	45.61	54.00	8.39	Average
@ 5552.250	34.60	8.72	39.18	77.39	81.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/S67	Frequency	TX 5570MHz

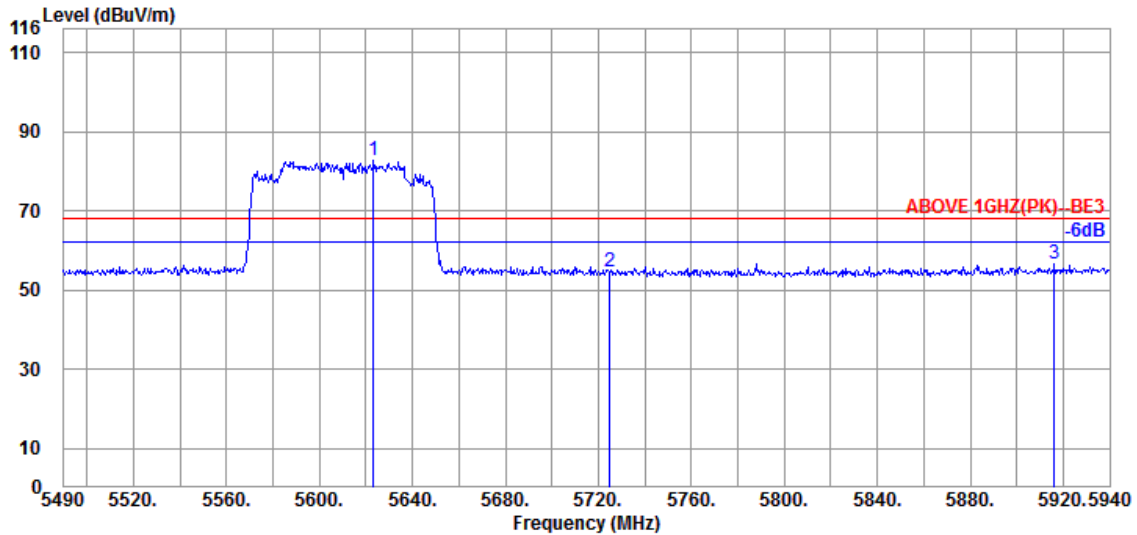

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5623.200	34.60	8.78	39.20	78.37	82.55	---	---	Peak
5724.900	34.50	8.86	39.23	50.65	54.78	68.20	13.42	Peak
5916.150	34.57	9.02	39.28	52.29	56.60	68.20	11.60	Peak

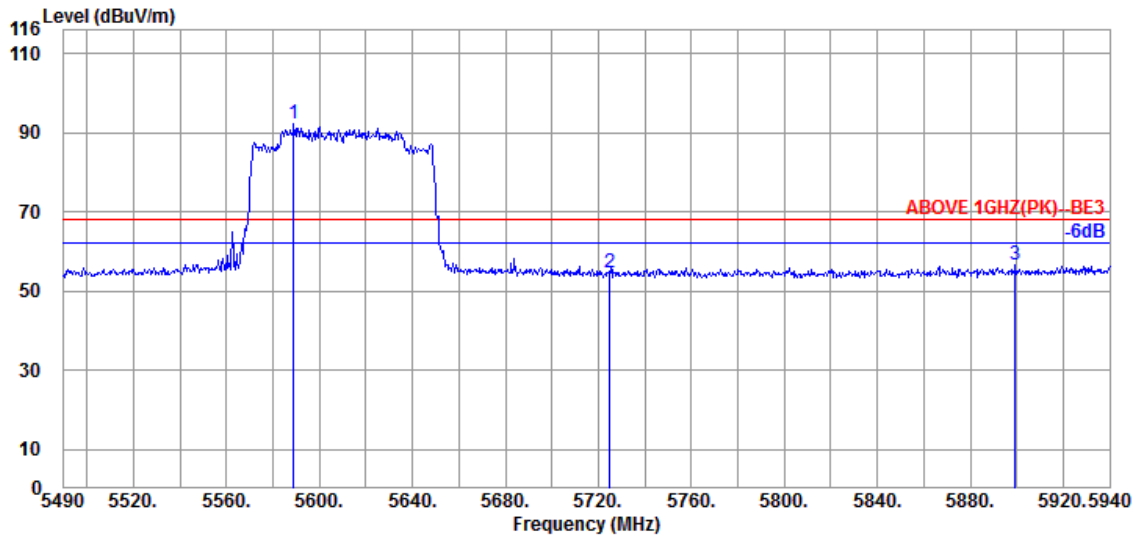

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.000	34.60	8.75	39.19	88.26	92.42	---	---	Peak
5724.900	34.50	8.86	39.23	50.60	54.73	68.20	13.47	Peak
5899.500	34.50	9.01	39.28	52.53	56.76	68.20	11.44	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

**A.2.2 Emissions outside the frequency band**

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	Band	NII-I
		Frequency	TX 5240MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	41.04	52.64	54.00	1.36	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	40.97	52.57	54.00	1.43	Peak

Mode	802.11a	Band	NII-2A
		Frequency	TX 5260MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	40.52	52.21	54.00	1.79	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	40.75	52.44	54.00	1.56	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5580MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	38.78	51.83	54.00	2.17	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	39.11	52.16	54.00	1.84	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	39.24	52.83	54.00	1.17	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	39.17	52.76	54.00	1.24	Peak

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.40	13.37	39.00	38.46	52.23	54.00	1.77	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.40	13.37	39.00	39.08	52.85	54.00	1.15	Peak

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5240MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	41.33	52.93	54.00	1.07	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	40.54	52.14	54.00	1.86	Peak

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5260MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	40.68	52.37	54.00	1.63	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	41.10	52.79	54.00	1.21	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5580MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	39.37	52.42	54.00	1.58	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	39.37	52.42	54.00	1.58	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	38.85	52.44	54.00	1.56	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	39.27	52.86	54.00	1.14	Peak

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5785MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	38.75	52.86	54.00	1.14	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	38.65	52.76	54.00	1.24	Peak

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5230MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	41.39	52.90	54.00	1.10	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	41.17	52.68	54.00	1.32	Peak

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5270MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	40.93	52.65	54.00	1.35	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	40.87	52.59	54.00	1.41	Peak

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	39.58	52.93	54.00	1.07	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	39.14	52.49	54.00	1.51	Peak



Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	39.03	52.60	54.00	1.40	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	38.73	52.30	54.00	1.70	Peak

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.40	13.39	39.02	38.63	52.40	54.00	1.60	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.40	13.39	39.02	39.19	52.96	54.00	1.04	Peak

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	40.86	52.28	54.00	1.72	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	41.28	52.70	54.00	1.30	Peak

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	40.62	52.39	54.00	1.61	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	40.63	52.40	54.00	1.60	Peak

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5610MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	38.52	51.72	54.00	2.28	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	39.07	52.27	54.00	1.73	Peak

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	38.76	52.20	54.00	1.80	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	38.74	52.18	54.00	1.82	Peak

Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	38.98	52.92	54.00	1.08	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	38.94	52.88	54.00	1.12	Peak

Mode	802.11ac-VHT160	Band	I/NII-2A
		Frequency	TX 5250MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	40.95	52.63	54.00	1.37	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	41.27	52.95	54.00	1.05	Peak

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	38.68	51.59	54.00	2.41	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	39.35	52.26	54.00	1.74	Peak

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5240MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	40.93	52.53	54.00	1.47	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	41.26	52.86	54.00	1.14	Peak

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5260MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	40.96	52.65	54.00	1.35	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	41.05	52.74	54.00	1.26	Peak

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5580MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	38.97	52.02	54.00	1.98	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	38.53	51.58	54.00	2.42	Peak

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	39.17	52.76	54.00	1.24	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	39.24	52.83	54.00	1.17	Peak

Mode	802.11ax-HE20	Band	NII-III
		Frequency	TX 5785MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	38.48	52.59	54.00	1.41	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	38.32	52.43	54.00	1.57	Peak

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5230MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	40.66	52.17	54.00	1.83	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	40.92	52.43	54.00	1.57	Peak

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5270MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	41.06	52.78	54.00	1.22	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	41.53	53.25	54.00	0.75	Peak

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	38.25	51.60	54.00	2.40	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	39.07	52.42	54.00	1.58	Peak

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	38.76	52.33	54.00	1.67	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	38.86	52.43	54.00	1.57	Peak

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.40	13.39	39.02	39.11	52.88	54.00	1.12	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.40	13.39	39.02	38.80	52.57	54.00	1.43	Peak



Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	41.25	52.67	54.00	1.33	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	40.62	52.04	54.00	1.96	Peak

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	40.86	52.63	54.00	1.37	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	41.15	52.92	54.00	1.08	Peak

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5610MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	38.98	52.18	54.00	1.82	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	38.88	52.08	54.00	1.92	Peak

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	38.72	52.16	54.00	1.84	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	38.41	51.85	54.00	2.15	Peak

Mode	802.11ax-HE80	Band	NII-III
		Frequency	TX 5775MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	38.89	52.83	54.00	1.17	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	38.79	52.73	54.00	1.27	Peak

Mode	802.11ax-HE160	Band	NII-I/NII-2A
		Frequency	TX 5250MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	40.53	52.21	54.00	1.79	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	40.82	52.50	54.00	1.50	Peak

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	39.73	52.64	54.00	1.36	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	39.79	52.70	54.00	1.30	Peak

**A.2.3 Emissions in Non-restricted Frequency Bands**

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

### A.3 26dB/6dB BANDWIDTH

Test Date	2019/09/23~10/3	Temp./Hum.	24°C/57%
Cable Loss	1dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

#### A.3.1 26dB/6dB Bandwidth Result

- For 26dB Bandwidth

Mode	Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit		
802.11a	NII-I	5180	22.81	16.805	Reference only		
		5200	22.97	16.807			
		5240	23.88	16.796			
	NII-2A	5260	23.28	16.823			
		5300	22.95	16.805			
		5320	22.65	16.803			
	NII-2C	5500	23.54	16.807			
		5580	23.23	16.767			
		5700	23.08	16.870			
		5720	23.04	16.830			
	802.11n-HT20	NII-I	5180	23.71		17.979	Reference only
			5200	23.62		17.944	
5240			23.07	18.056			
NII-2A		5260	23.53	17.940			
		5300	23.70	17.984			
		5320	23.51	17.953			
NII-2C		5500	23.87	18.008			
		5580	25.08	17.995			
		5700	24.13	17.941			
		5720	24.57	18.035			

Mode	Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11n- HT40	NII-I	5190	43.90	36.525	Reference only
		5230	44.43	36.413	
	NII-2A	5270	44.39	36.422	
		5310	43.23	36.372	
	NII-2C	5510	43.15	36.419	
		5550	42.94	36.401	
		5670	43.38	36.409	
802.11ac- VHT80	NII-I	5210	83.82	75.168	Reference only
	NII-2A	5290	84.27	75.078	
	NII-2C	5530	84.12	75.110	
		5610	83.55	75.154	
		5690	83.09	75.118	
802.11ac- VHT160	NII-I	5250	163.50	153.050	
	NII-2A				
	NII-2C	5570	162.60	153.080	

Mode	Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-I	5180	24.43	19.033	Reference only
		5200	23.80	19.067	
		5240	23.57	19.038	
	NII-2A	5260	23.66	19.099	
		5300	24.21	19.084	
		5320	23.91	19.124	
	NII-2C	5500	24.21	19.120	
		5580	23.15	19.073	
		5700	23.74	19.095	
		5720	23.95	19.073	
802.11ax-HE40	NII-I	5190	42.11	37.738	Reference only
		5230	42.47	37.818	
	NII-2A	5270	42.56	37.861	
		5310	43.47	37.854	
	NII-2C	5510	42.03	37.840	
		5550	42.74	37.768	
		5670	41.08	37.850	
		5710	42.61	37.787	
802.11ax-HE80	NII-I	5210	81.78	76.665	Reference only
	NII-2A	5290	81.97	76.571	
	NII-2C	5530	81.83	76.536	
		5610	81.00	76.499	
		5690	82.38	76.536	
802.11ax-HE160	NII-I	5250	162.50	154.730	Reference only
	NII-2A				
	NII-2C	5570	163.50	155.110	

Mode	Band	Centre Frequency (MHz)	RU Configuration	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-I	5180	26/0	19.87	18.456	Reference only
			52/37	20.20	18.204	
			106/53	20.86	18.233	
	NII-2A	5320	26/8	20.14	18.518	
			52/40	21.49	18.158	
			106/54	20.57	17.889	
	NII-2C	5500	26/0	20.27	18.583	
			52/37	20.87	18.215	
			106/53	20.89	18.236	
5700		26/8	19.65	18.236		
		52/40	21.11	18.404		
		106/54	21.62	18.220		
802.11ax-HE40	NII-I	5190	242/61	23.43	18.846	Reference only
	NII-2A	5310	242/62	25.43	18.771	
	NII-2C	5510	242/61	24.54	18.796	
		5670	242/62	23.92	18.841	
802.11ax-HE80	NII-I	5210	484/65	41.80	37.553	Reference only
	NII-2A	5290	484/66	40.97	37.466	
	NII-2C	5530	484/65	42.78	37.403	
		5610	484/66	41.89	37.561	
802.11ax-HE160	NII-I/ NII-2A	5250	996/67	81.81	76.779	Reference only
			996/S67	81.49	76.969	
	NII-2C	5570	996/67	81.68	76.461	
			996/S67	81.49	76.802	

● For 6dB Bandwidth


Mode	Band	Centre Frequency (MHz)	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	NII-III	5745	16.39	16.597	≥ 500kHz
		5785	16.43	16.581	
		5825	16.38	16.571	
802.11n-HT20	NII-III	5745	17.60	17.747	
		5785	17.81	17.821	
		5825	17.79	17.798	
802.11n-HT40	NII-III	5755	36.38	36.296	
		5795	36.42	36.311	
802.11ac-VHT80	NII-III	5775	52.67	75.108	
802.11ax-HE20	NII-III	5745	19.00	19.012	
		5785	19.07	18.984	
		5825	18.34	19.010	
802.11ax-HE40	NII-III	5755	38.03	37.798	
		5795	37.75	37.775	
802.11ax-HE80	NII-III	5775	68.96	76.654	


Mode	Band	Centre Frequency (MHz)	RU Configuration	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-III	5745	26/0	17.03	18.063	≥ 500kHz
			52/37	17.04	18.137	
			106/53	17.04	18.063	
	NII-III	5825	26/8	2.050	18.502	
			52/40	16.97	17.979	
			106/54	17.14	18.304	
802.11ax-HE40	NII-III	5755	242/61	18.89	18.803	
	NII-III	5795	242/62	18.74	18.805	
802.11ax-HE80	NII-III	5775	484/65	37.69	37.459	
			484/66	37.68	37.422	




### A.3.2 Measurement Plots


- For 26dB Bandwidth

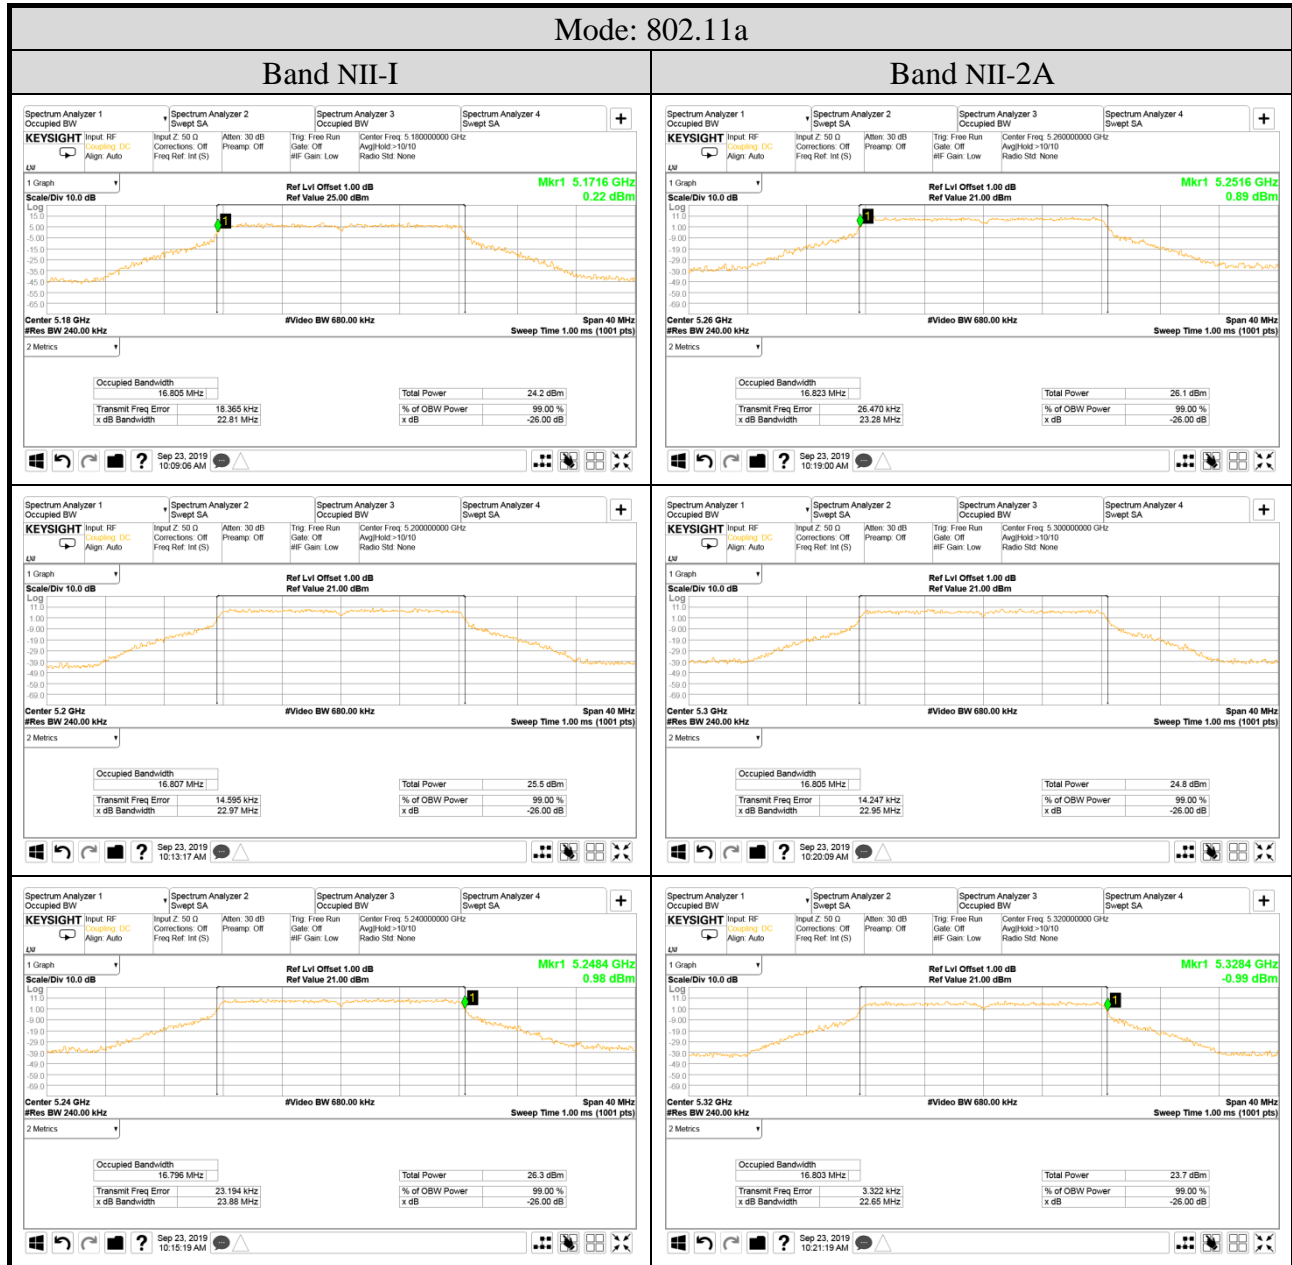

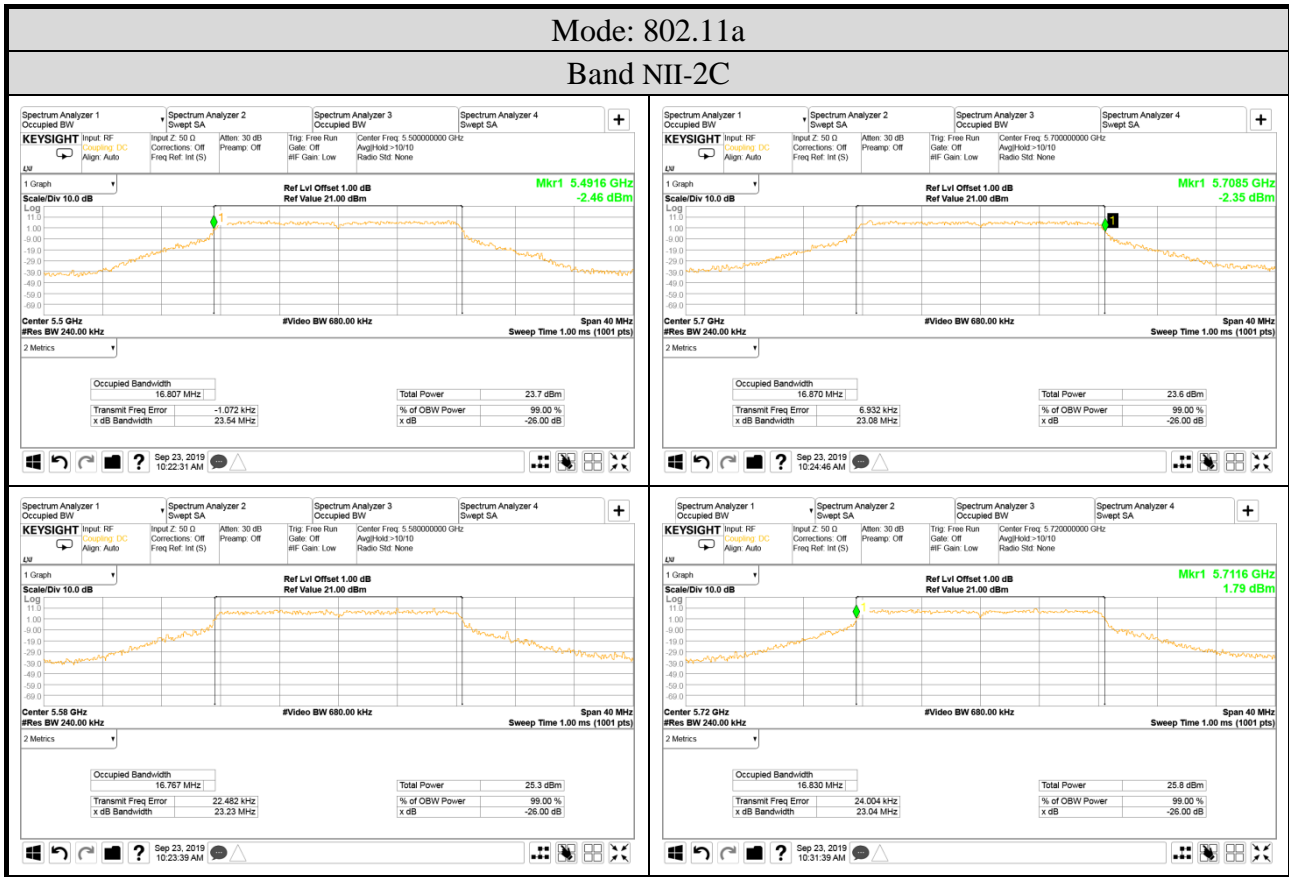


Mode: 802.11n-HT20

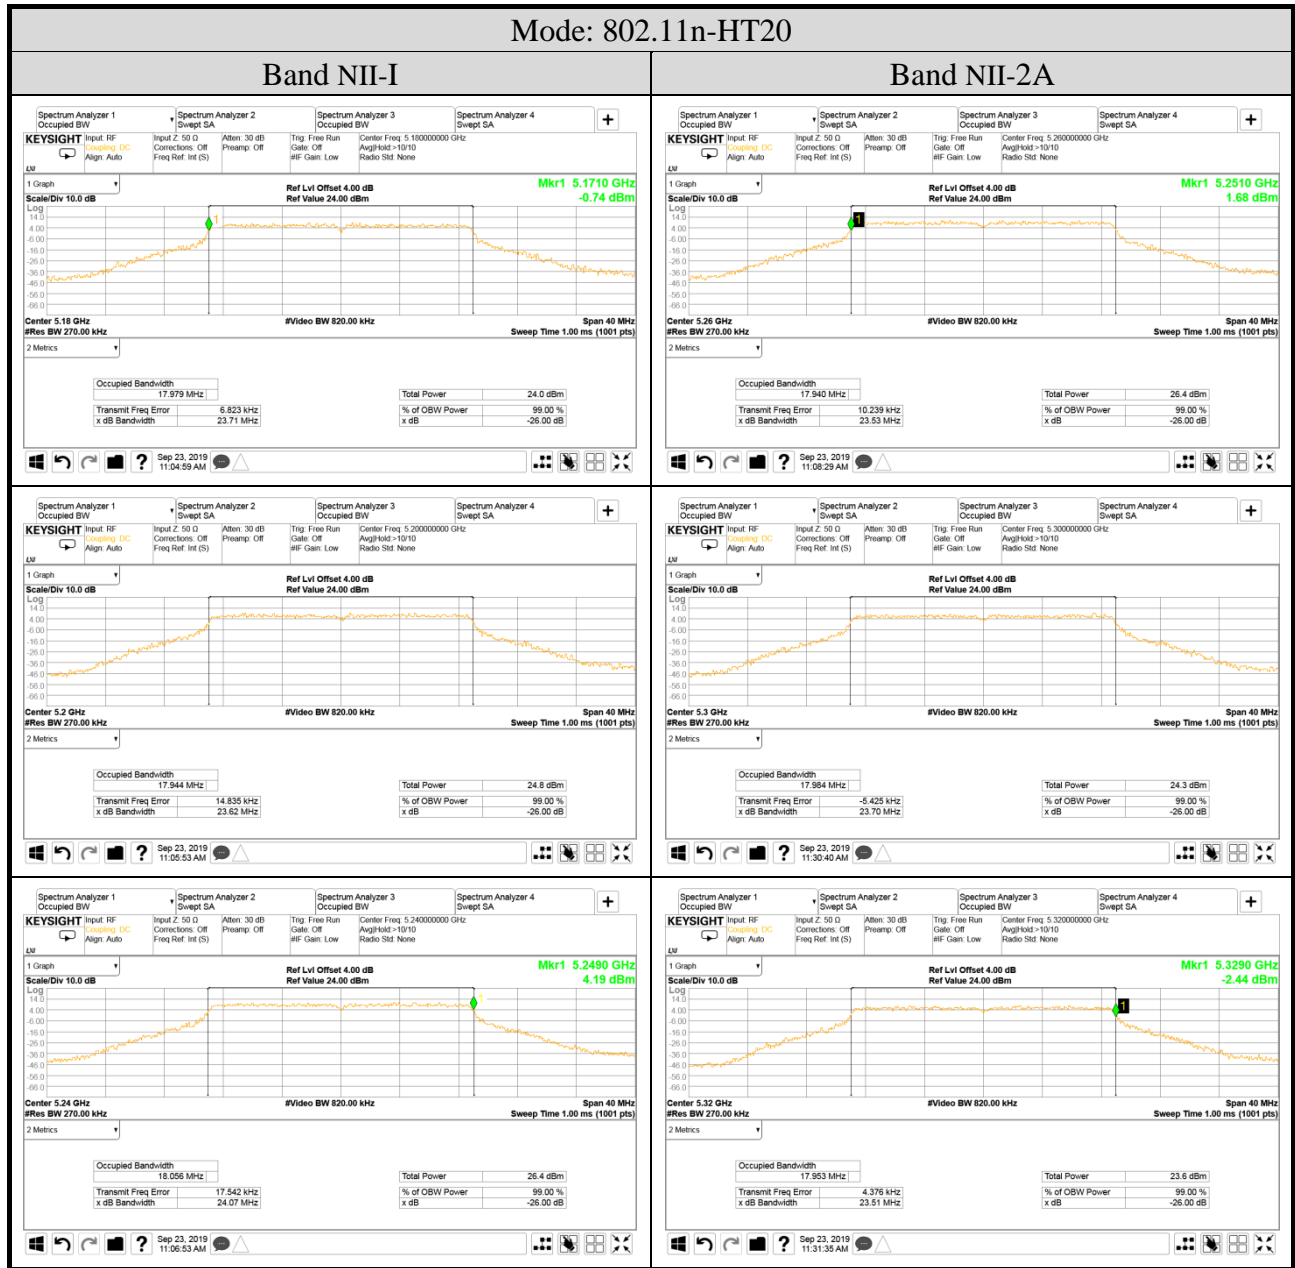

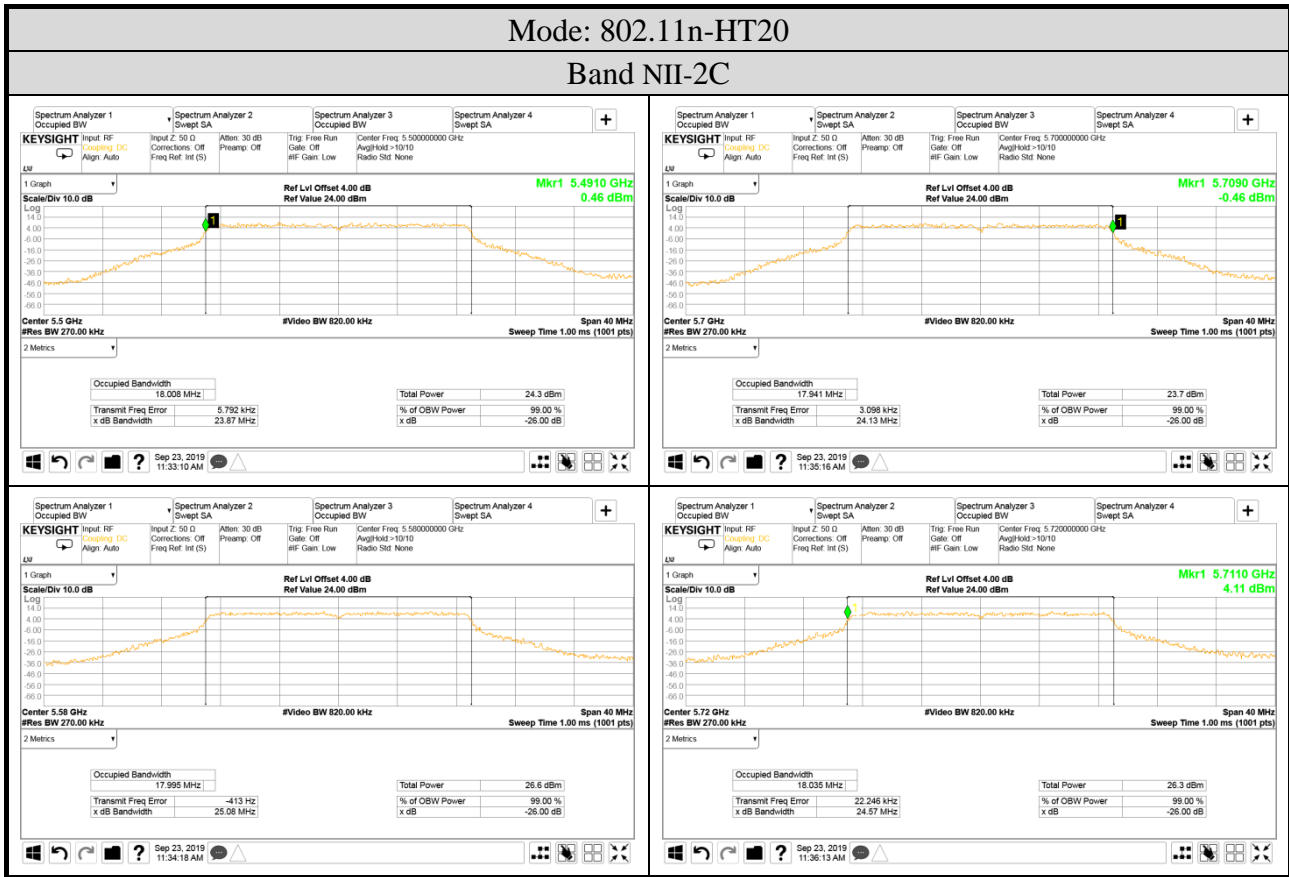

Mode: 802.11n-HT40

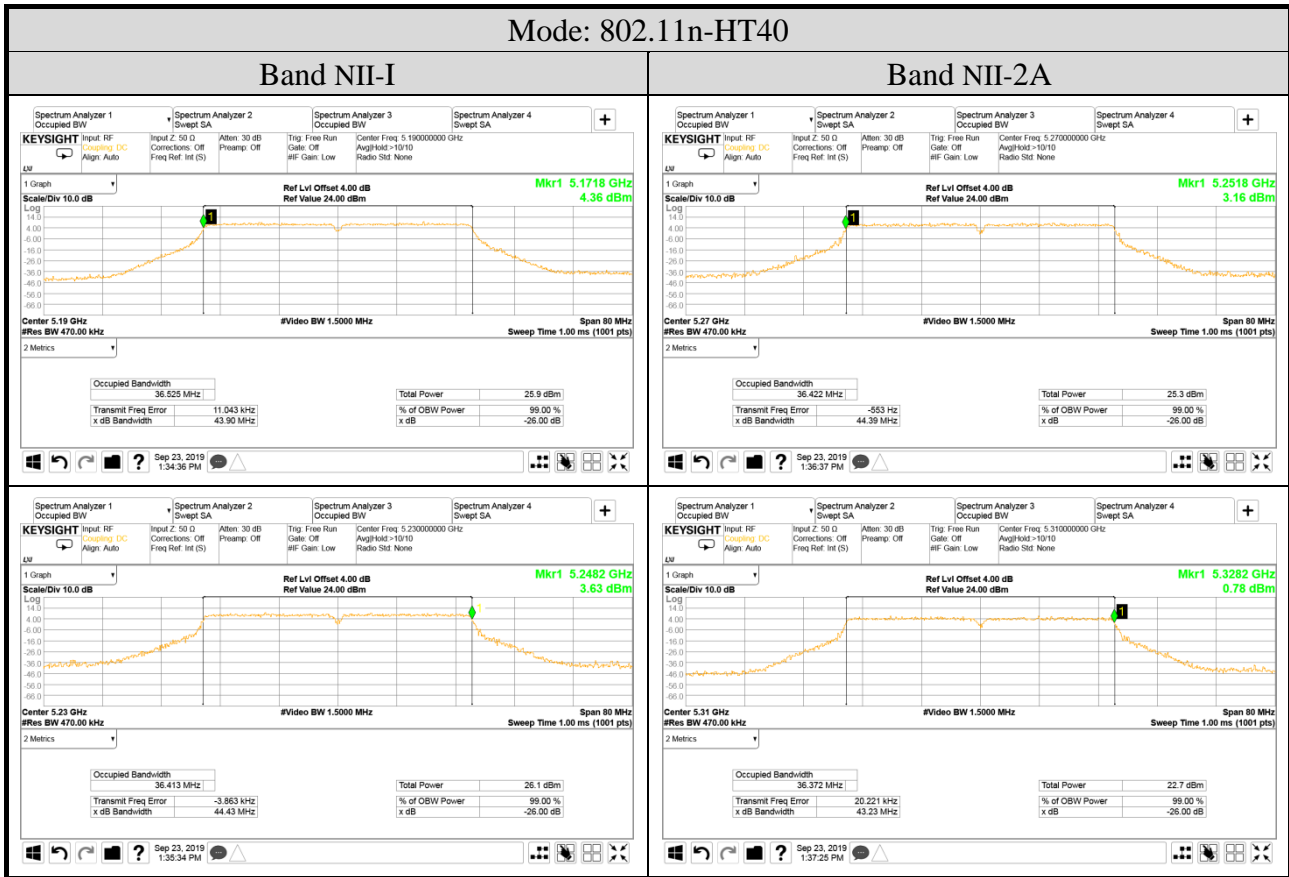

Mode: 802.11n-HT40

Band NII-2C

