

---


---

## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>6</b>
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	189
A.2.3 Emissions in Non-restricted Frequency Bands:.....	200
<b>A.3 DTS/OCCUPIED BANDWIDTH</b> .....	<b>201</b>
A.3.1 DTS/Occupied Bandwidth Result.....	201
A.3.2 Measurement Plots .....	203
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>219</b>
A.4.1 Peak Output Power .....	219
A.4.2 Average Output Power (Reporting only).....	227
A.4.3 Measurement Plots .....	233
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>235</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>261</b>
A.6.1 Power Spectral Density Result .....	261
A.6.2 Measurement Plots .....	264

## A.1 CONDUCTED EMISSION

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with PM main board)		

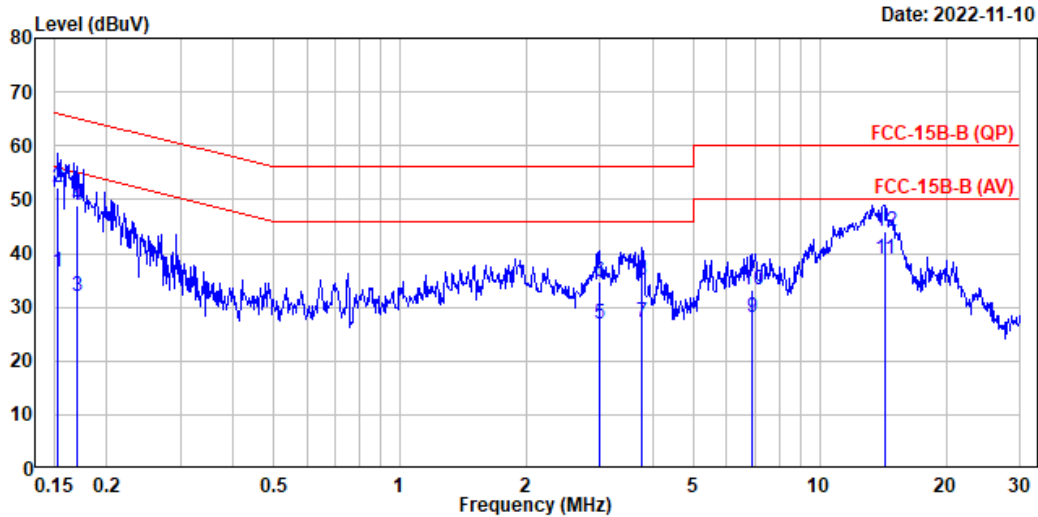


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.22	0.03	9.85	16.41	36.51	55.83	19.32	Average
2	0.153	10.22	0.03	9.85	32.14	52.24	65.83	13.59	QP
3	0.171	10.22	0.03	9.85	11.75	31.85	54.92	23.07	Average
4	0.171	10.22	0.03	9.85	28.79	48.89	64.92	16.03	QP
5	3.000	10.27	0.07	9.86	6.77	26.97	46.00	19.03	Average
6	3.000	10.27	0.07	9.86	14.44	34.64	56.00	21.36	QP
7	3.754	10.28	0.08	9.86	6.80	27.02	46.00	18.98	Average
8	3.754	10.28	0.08	9.86	14.88	35.10	56.00	20.90	QP
9	6.895	10.36	0.11	9.87	7.68	28.02	50.00	21.98	Average
10	6.895	10.36	0.11	9.87	12.95	33.29	60.00	26.71	QP
11	14.275	10.53	0.17	9.91	18.26	38.87	50.00	11.13	Average
12	14.275	10.53	0.17	9.91	23.57	44.18	60.00	15.82	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with PM main board)		

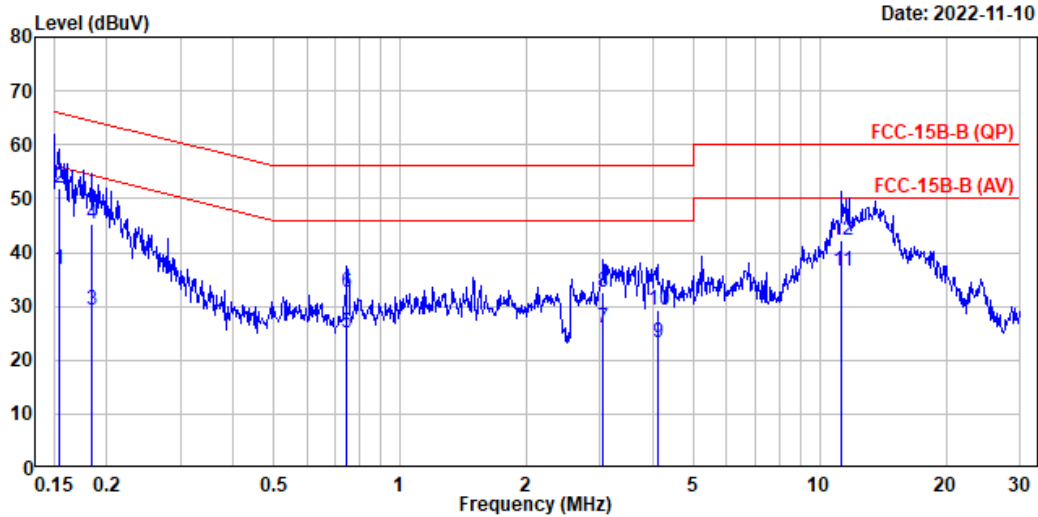

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17290R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.154	10.34	0.03	9.85	16.58	36.80	55.79	18.99	Average
2	0.154	10.34	0.03	9.85	31.64	51.86	65.79	13.93	QP
3	0.185	10.33	0.03	9.85	9.17	29.38	54.26	24.88	Average
4	0.185	10.33	0.03	9.85	25.06	45.27	64.26	18.99	QP
5	0.747	10.33	0.04	9.85	4.82	25.04	46.00	20.96	Average
6	0.747	10.33	0.04	9.85	12.33	32.55	56.00	23.45	QP
7	3.045	10.38	0.07	9.86	5.57	25.88	46.00	20.12	Average
8	3.045	10.38	0.07	9.86	12.29	32.60	56.00	23.40	QP
9	4.106	10.41	0.08	9.86	2.76	23.11	46.00	22.89	Average
10	4.106	10.41	0.08	9.86	8.85	29.20	56.00	26.80	QP
11	11.294	10.70	0.15	9.90	15.75	36.50	50.00	13.50	Average
12	11.294	10.70	0.15	9.90	21.41	42.16	60.00	17.84	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with GM main board)		

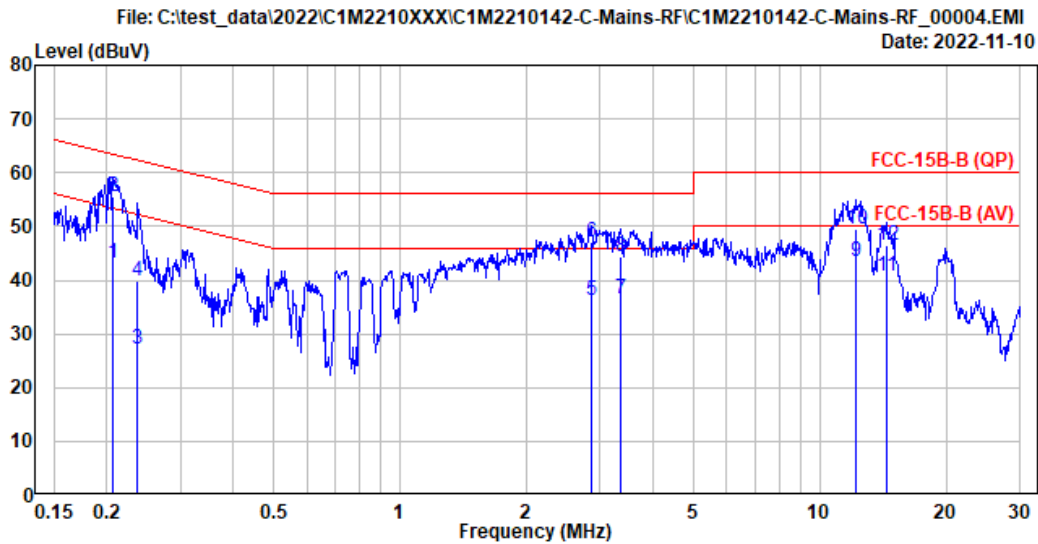

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17290R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.206	10.32	0.03	9.85	22.96	43.16	53.35	10.19	Average
2	0.206	10.32	0.03	9.85	35.36	55.56	63.35	7.79	QP
3	0.237	10.32	0.03	9.85	7.03	27.23	52.19	24.96	Average
4	0.237	10.32	0.03	9.85	19.57	39.77	62.19	22.42	QP
5	2.854	10.38	0.07	9.86	16.02	36.33	46.00	9.67	Average
6	2.854	10.38	0.07	9.86	26.87	47.18	56.00	8.82	QP
7	3.347	10.39	0.07	9.86	16.28	36.60	46.00	9.40	Average
8	3.347	10.39	0.07	9.86	23.92	44.24	56.00	11.76	QP
9	12.232	10.75	0.15	9.90	22.64	43.44	50.00	6.56	Average
10	12.232	10.75	0.15	9.90	28.65	49.45	60.00	10.55	QP
11	14.418	10.85	0.17	9.91	19.92	40.85	50.00	9.15	Average
12	14.418	10.85	0.17	9.91	25.57	46.50	60.00	13.50	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with GM main board)		

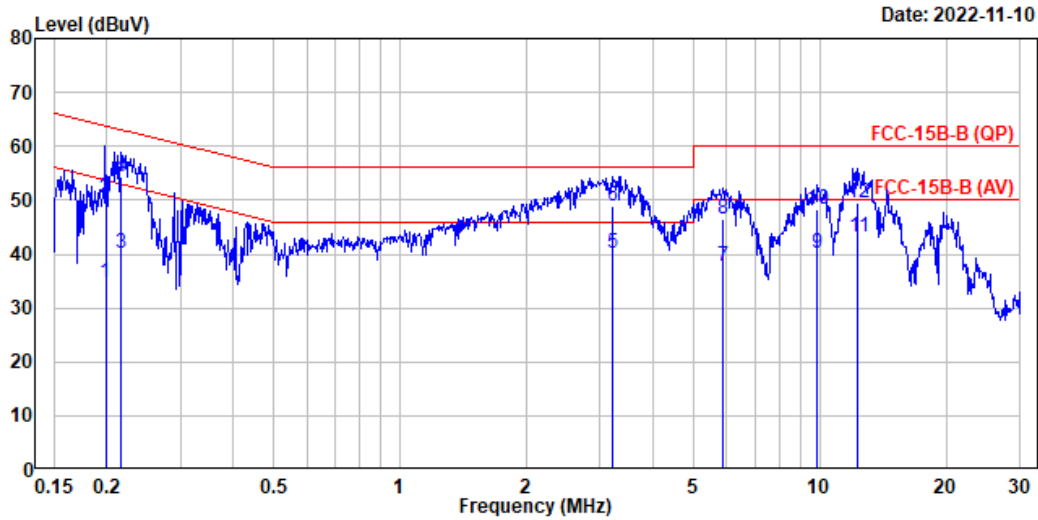

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 17290R	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.199	10.22	0.03	9.85	14.76	34.86	53.66	18.80	Average
2	0.199	10.22	0.03	9.85	30.19	50.29	63.66	13.37	QP
3	0.216	10.22	0.03	9.85	20.05	40.15	52.98	12.83	Average
4	0.216	10.22	0.03	9.85	34.34	54.44	62.98	8.54	QP
5	3.216	10.27	0.07	9.86	19.92	40.12	46.00	5.88	Average
6	3.216	10.27	0.07	9.86	28.57	48.77	56.00	7.23	QP
7	5.879	10.34	0.10	9.87	17.47	37.78	50.00	12.22	Average
8	5.879	10.34	0.10	9.87	26.22	46.53	60.00	13.47	QP
9	9.872	10.42	0.14	9.89	19.78	40.23	50.00	9.77	Average
10	9.872	10.42	0.14	9.89	27.94	48.39	60.00	11.61	QP
11	12.354	10.49	0.15	9.90	22.76	43.30	50.00	6.70	Average
12	12.354	10.49	0.15	9.90	28.83	49.37	60.00	10.63	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## A.2 RADIATED EMISSION

Test Date	2022/10/20~12/11	Temp./Hum.	22~24°C/51~61%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Martin Chen

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

## A.2.1.2 Frequency Below 1GHz

## ● Test SKU #1 (with PM main board)

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	31.76	29.95	40.00	10.05	Peak
149.310	16.92	3.19	26.00	33.48	27.59	43.50	15.91	Peak
378.230	21.18	5.69	26.28	37.70	38.29	46.00	7.71	Peak
485.900	23.24	6.65	27.04	36.81	39.66	46.00	6.34	Peak
721.610	24.86	7.76	27.40	30.10	35.32	46.00	10.68	Peak
976.720	26.86	9.17	26.72	28.65	37.96	54.00	16.04	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.790	21.20	1.57	0.00	13.80	36.57	40.00	3.43	QP
149.310	16.92	3.19	26.00	37.99	32.10	43.50	11.40	Peak
223.030	16.87	3.97	25.74	38.42	33.52	46.00	12.48	Peak
378.230	21.18	5.69	26.28	37.64	38.23	46.00	7.77	Peak
485.900	23.24	6.65	27.04	37.35	40.20	46.00	5.80	Peak
540.220	23.86	6.90	27.24	32.26	35.78	46.00	10.22	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	32.09	30.28	40.00	9.72	Peak
149.310	16.92	3.19	26.00	32.98	27.09	43.50	16.41	Peak
378.230	21.18	5.69	26.28	38.16	38.75	46.00	7.25	Peak
485.900	23.24	6.65	27.04	36.73	39.58	46.00	6.42	Peak
540.220	23.86	6.90	27.24	32.41	35.93	46.00	10.07	Peak
970.900	26.82	9.15	26.75	29.00	38.22	54.00	15.78	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.790	21.20	1.57	0.00	14.20	36.97	40.00	3.03	QP
148.340	16.99	3.18	26.00	37.77	31.94	43.50	11.56	Peak
378.230	21.18	5.69	26.28	37.81	38.40	46.00	7.60	Peak
485.900	23.24	6.65	27.04	36.35	39.20	46.00	6.80	Peak
690.570	24.70	7.58	27.43	29.54	34.39	46.00	11.61	Peak
972.840	26.82	9.15	26.75	29.51	38.73	54.00	15.27	Peak

● Test SKU #2 (with GM main board)

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	31.30	29.49	40.00	10.51	Peak
155.130	16.58	3.26	25.97	33.57	27.44	43.50	16.06	Peak
378.230	21.18	5.69	26.28	37.09	37.68	46.00	8.32	Peak
485.900	23.24	6.65	27.04	36.75	39.60	46.00	6.40	Peak
540.220	23.86	6.90	27.24	30.89	34.41	46.00	11.59	Peak
984.480	26.96	9.22	26.69	28.69	38.18	54.00	15.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.87	1.46	0.00	13.70	38.03	40.00	1.97	QP
174.530	15.74	3.45	25.89	39.79	33.09	43.50	10.41	Peak
378.230	21.18	5.69	26.28	38.93	39.52	46.00	6.48	Peak
485.900	23.24	6.65	27.04	35.92	38.77	46.00	7.23	Peak
875.840	25.85	8.63	27.06	29.12	36.54	46.00	9.46	Peak
976.720	26.86	9.17	26.72	28.91	38.22	54.00	15.78	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.32	1.53	26.48	32.07	29.44	40.00	10.56	Peak
101.780	16.95	2.63	26.28	33.33	26.63	43.50	16.87	Peak
378.230	21.18	5.69	26.28	37.85	38.44	46.00	7.56	Peak
485.900	23.24	6.65	27.04	36.03	38.88	46.00	7.12	Peak
955.380	26.64	9.06	26.81	28.30	37.19	46.00	8.81	Peak
998.060	27.07	9.27	26.66	28.38	38.06	54.00	15.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.87	1.46	0.00	13.80	38.13	40.00	1.87	QP
203.630	15.60	3.74	25.78	39.55	33.11	43.50	10.39	Peak
378.230	21.18	5.69	26.28	38.43	39.02	46.00	6.98	Peak
485.900	23.24	6.65	27.04	35.59	38.44	46.00	7.56	Peak
540.220	23.86	6.90	27.24	30.97	34.49	46.00	11.51	Peak
985.450	26.96	9.22	26.69	28.56	38.05	54.00	15.95	Peak




A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics

**Band Edge:**


- **Test SKU #1 (with INPAQ Antenna and PM main board)**

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

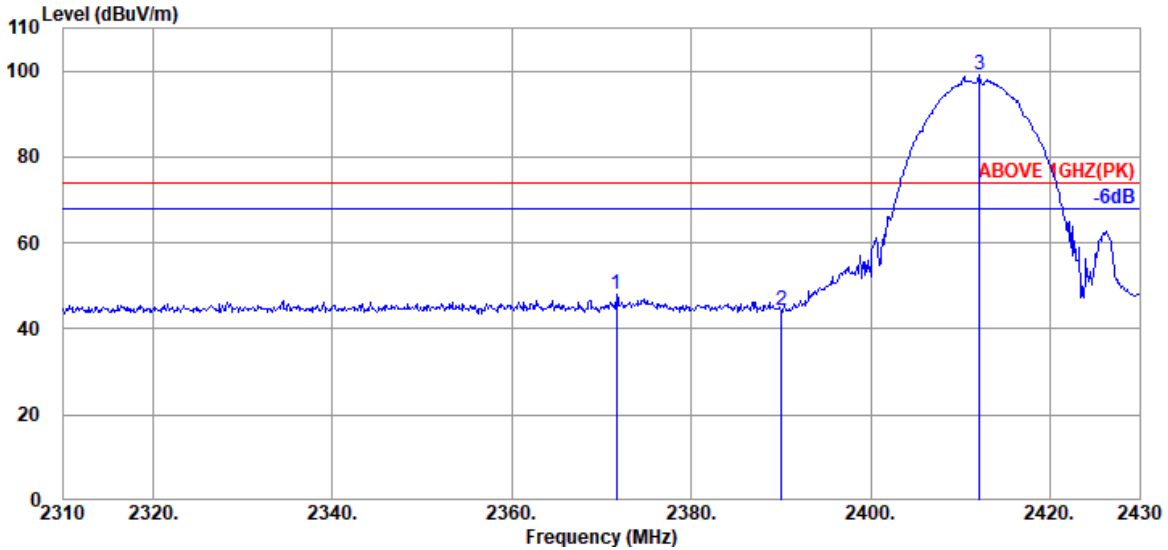

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.680	28.33	5.70	39.93	53.96	48.06	74.00	25.94	Peak
2390.040	28.21	5.72	39.93	50.48	44.48	74.00	29.52	Peak
@ 2412.120	28.19	5.76	39.93	104.92	98.94	---	---	Peak

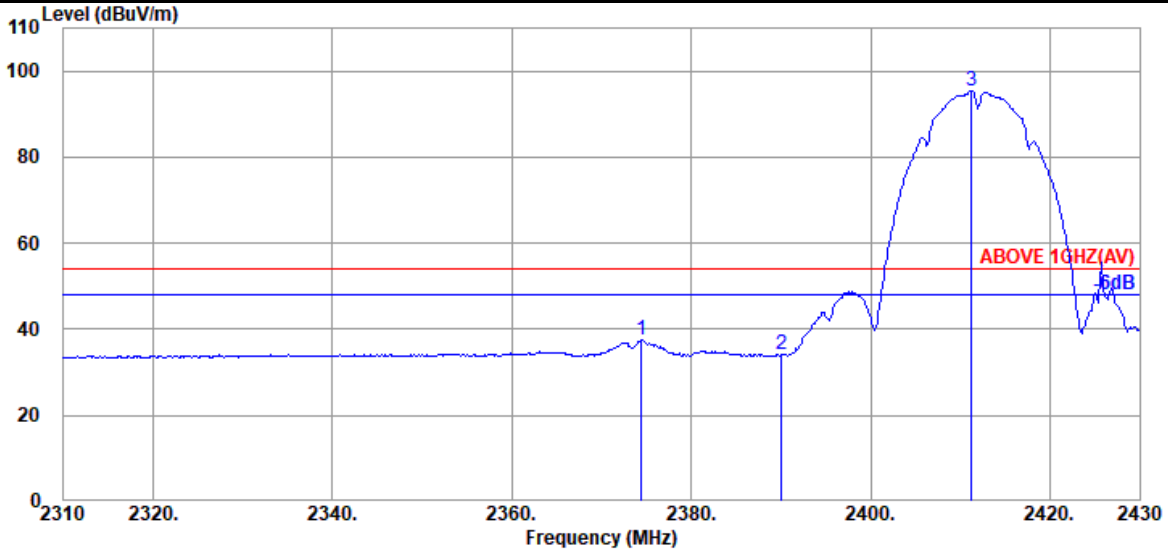


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	28.33	5.70	39.93	43.33	37.43	54.00	16.57	Average
2390.040	28.21	5.72	39.93	40.09	34.09	54.00	19.91	Average
@ 2411.280	28.19	5.76	39.93	101.37	95.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

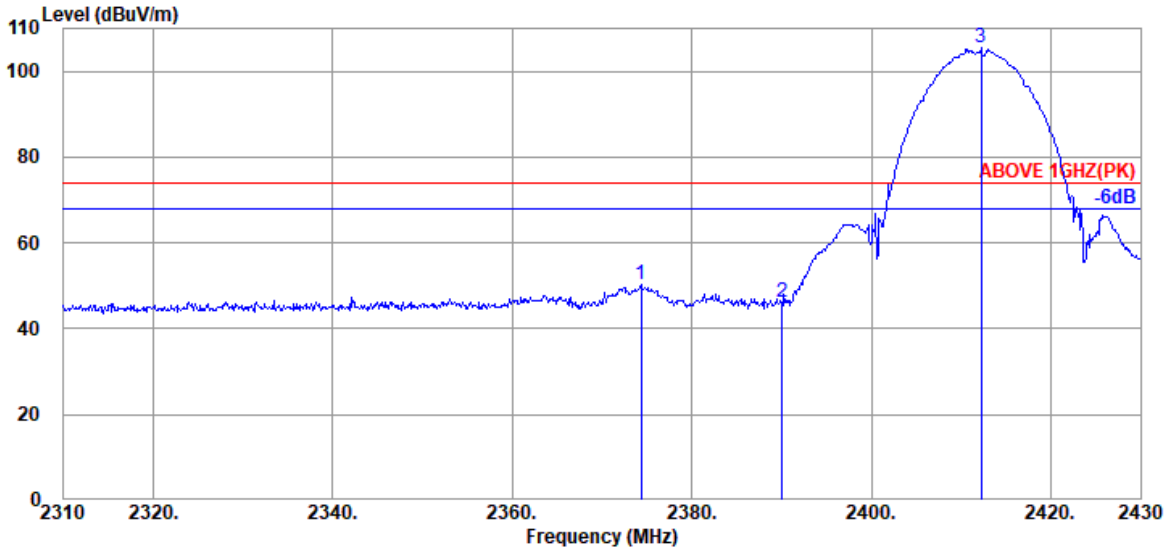

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.320	28.33	5.70	39.93	56.28	50.38	74.00	23.62	Peak
2390.040	28.21	5.72	39.93	52.02	46.02	74.00	27.98	Peak
@ 2412.240	28.19	5.76	39.93	111.63	105.65	74.00	---	Peak

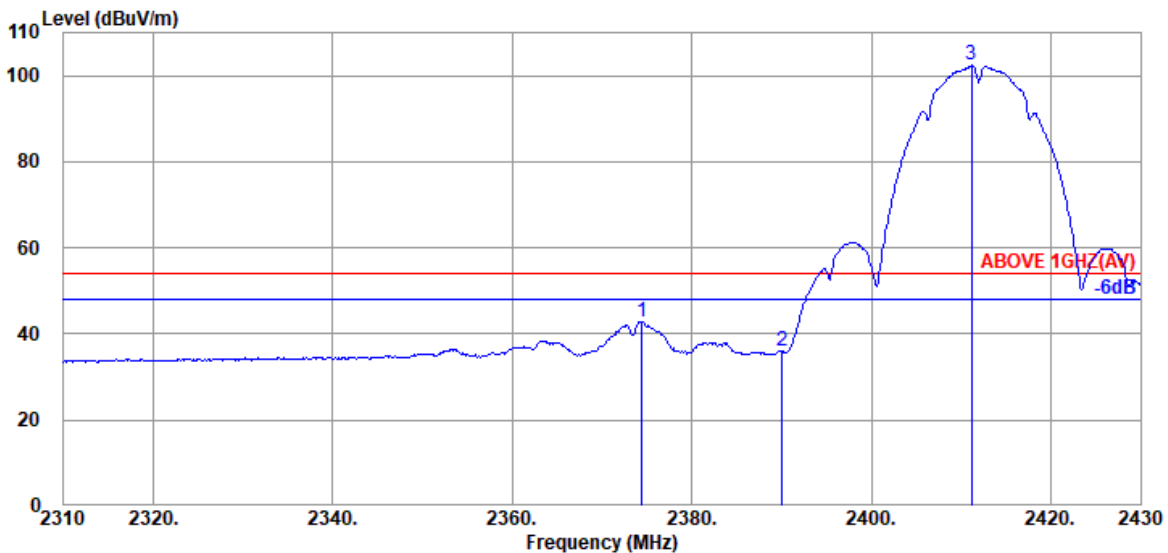


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	28.33	5.70	39.93	48.74	42.84	54.00	11.16	Average
2390.040	28.21	5.72	39.93	42.04	36.04	54.00	17.96	Average
@ 2411.160	28.14	5.75	39.93	108.35	102.31	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

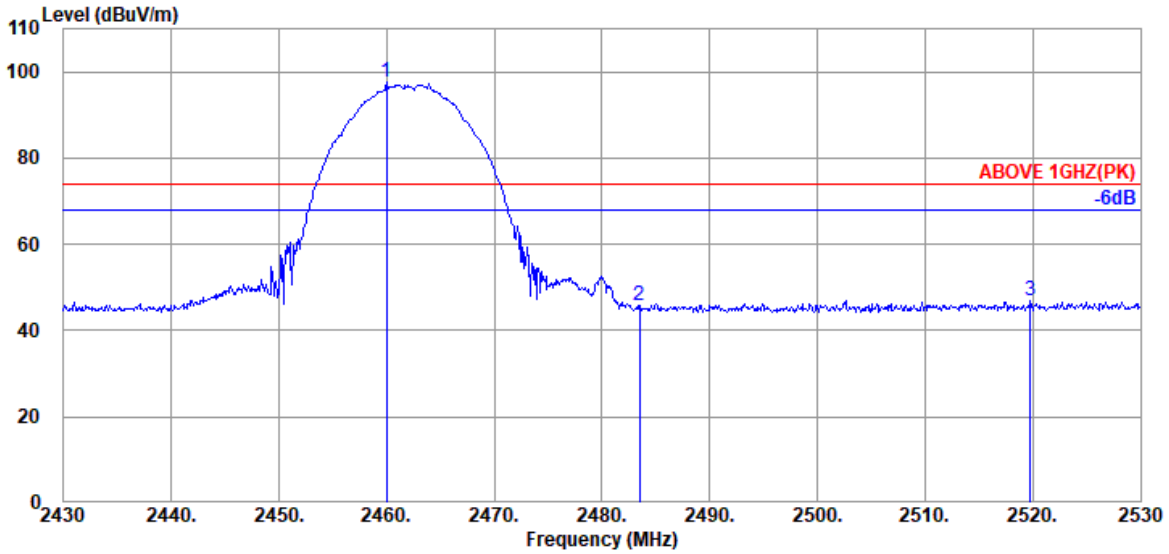

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.000	28.41	5.83	39.92	103.27	97.59	---	---	Peak
	2483.500	28.47	5.87	39.92	51.44	45.86	74.00	28.14	Peak
	2519.800	28.63	5.94	39.93	52.23	46.87	74.00	27.13	Peak

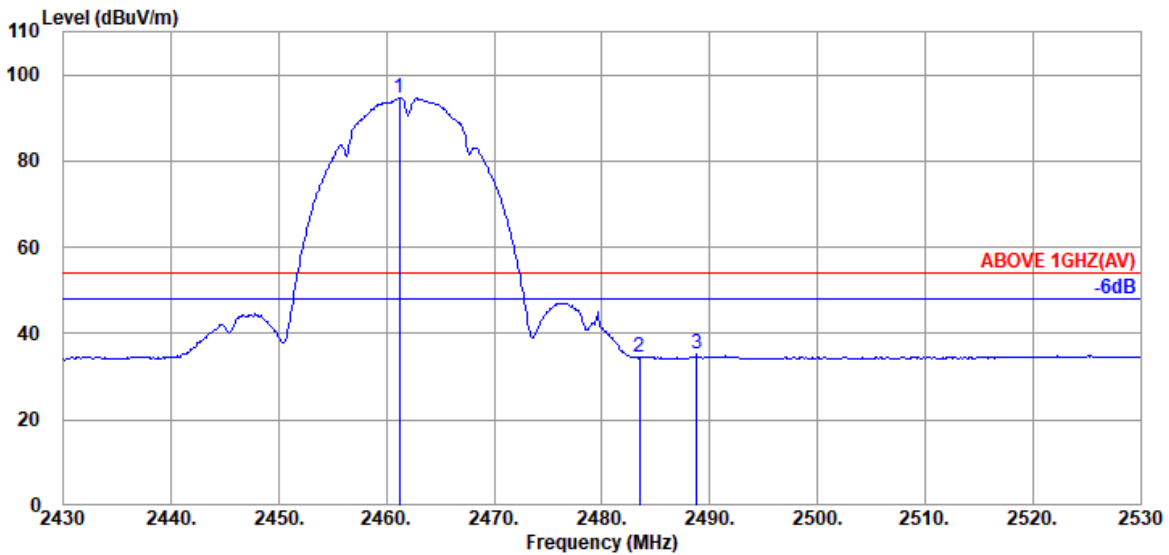


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.200	28.43	5.84	39.92	100.37	94.72	---	---	Average
	2483.500	28.47	5.87	39.92	40.01	34.43	54.00	19.57	Average
	2488.800	28.47	5.87	39.92	40.69	35.11	54.00	18.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

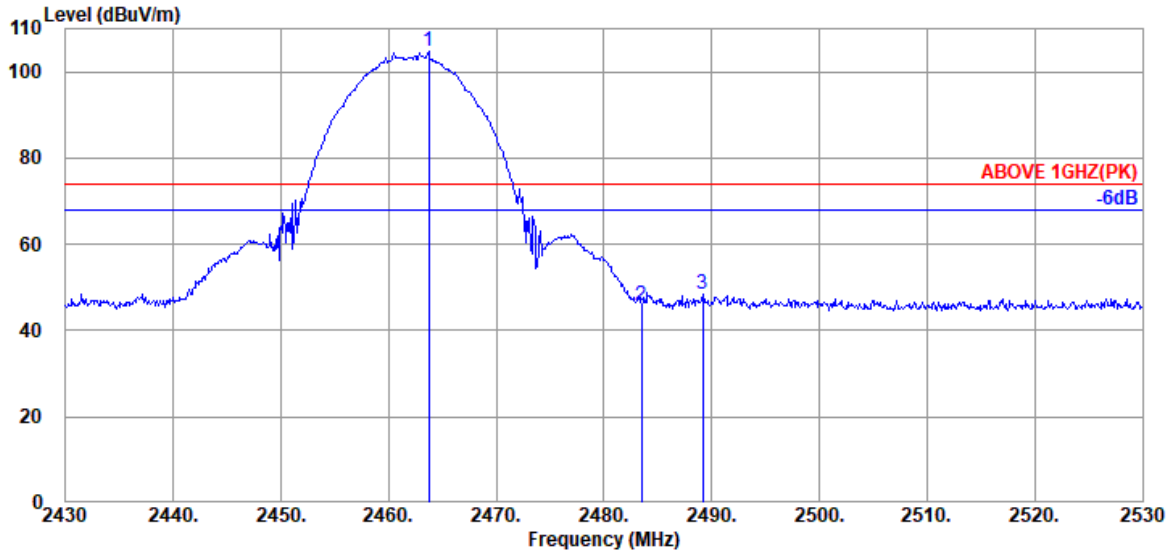

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.700	28.43	5.84	39.92	110.49	104.84	---	---	Peak
2483.500	28.47	5.87	39.92	51.35	45.77	74.00	28.23	Peak
2489.200	28.49	5.88	39.92	53.81	48.26	74.00	25.74	Peak

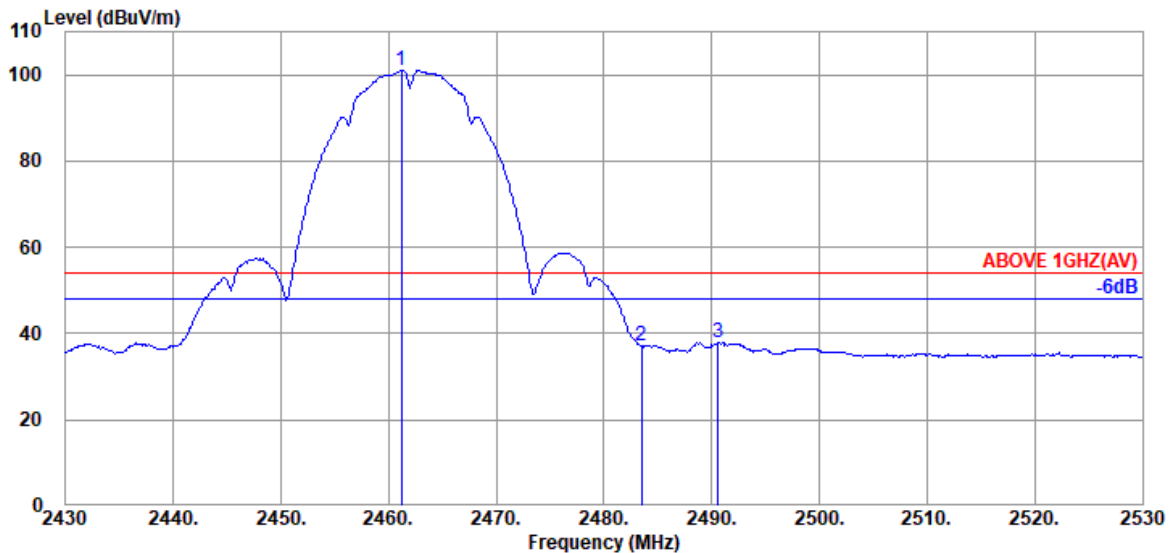


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.43	5.84	39.92	106.81	101.16	---	---	Average
2483.500	28.47	5.87	39.92	42.93	37.35	54.00	16.65	Average
2490.600	28.49	5.88	39.92	43.48	37.93	54.00	16.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

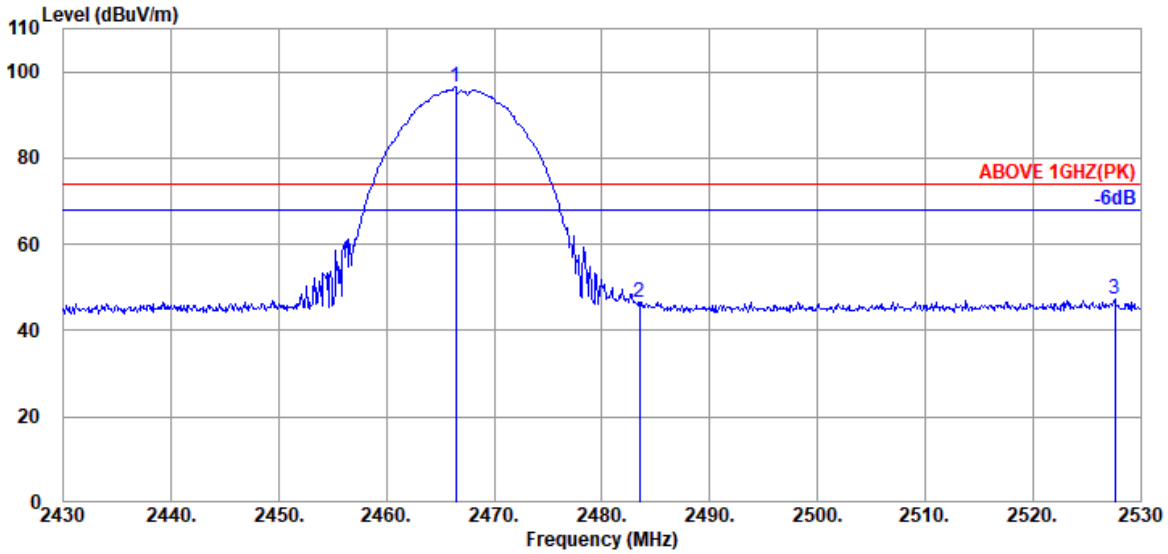

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.43	5.84	39.92	102.21	96.56	---	---	Peak
2483.500	28.47	5.87	39.92	52.08	46.50	74.00	27.50	Peak
2527.600	28.67	5.96	39.93	52.58	47.28	74.00	26.72	Peak

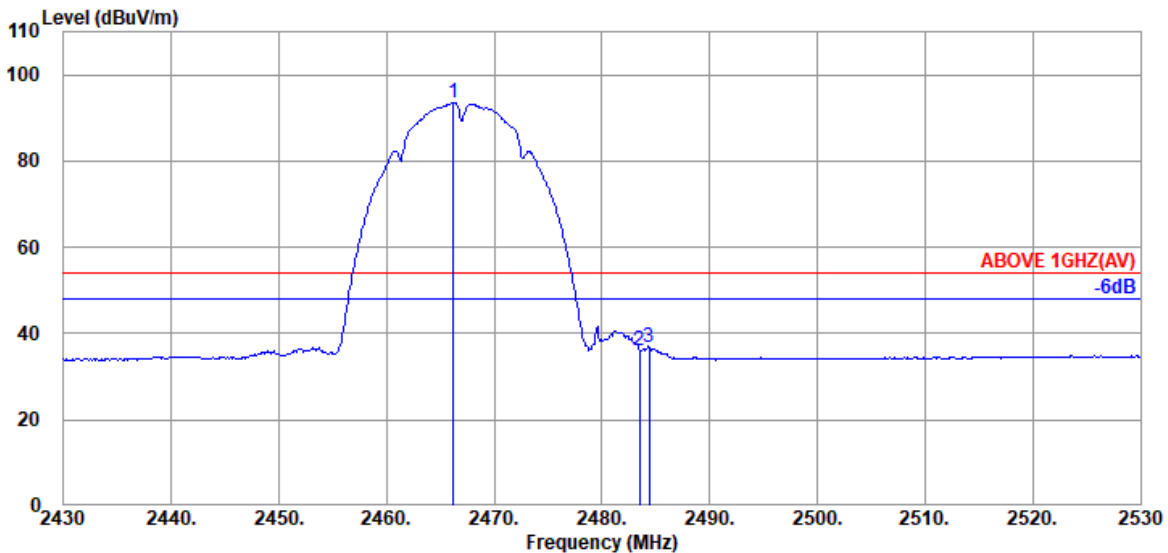


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	5.84	39.92	99.23	93.58	---	---	Average
2483.500	28.47	5.87	39.92	41.75	36.17	54.00	17.83	Average
2484.400	28.47	5.87	39.92	42.47	36.89	54.00	17.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

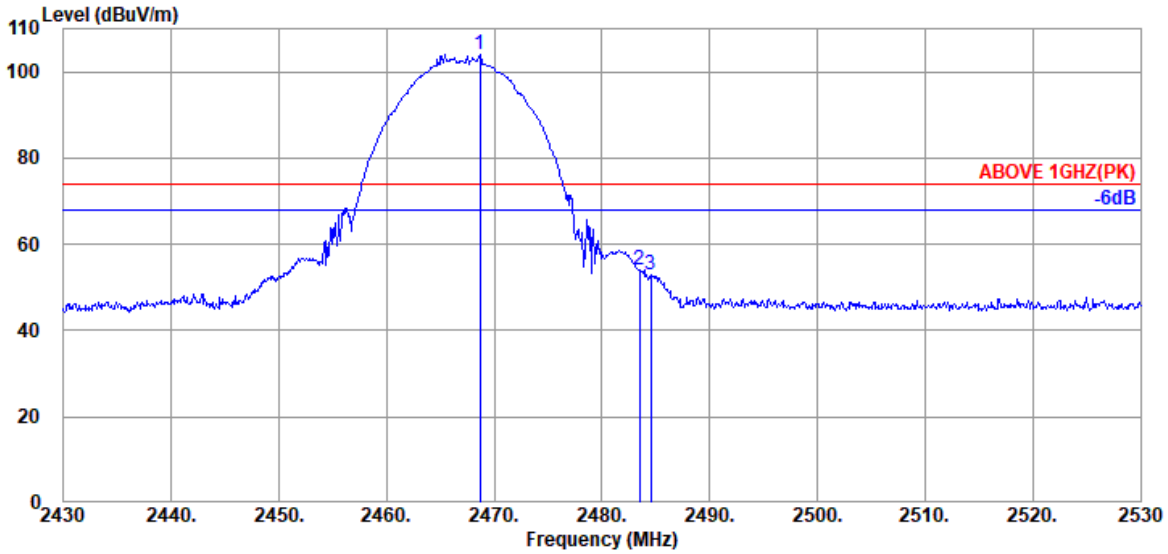

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.700	28.44	5.85	39.92	109.72	104.09	---	---	Peak
	2483.500	28.47	5.87	39.92	59.46	53.88	74.00	20.12	Peak
	2484.500	28.47	5.87	39.92	58.36	52.78	74.00	21.22	Peak

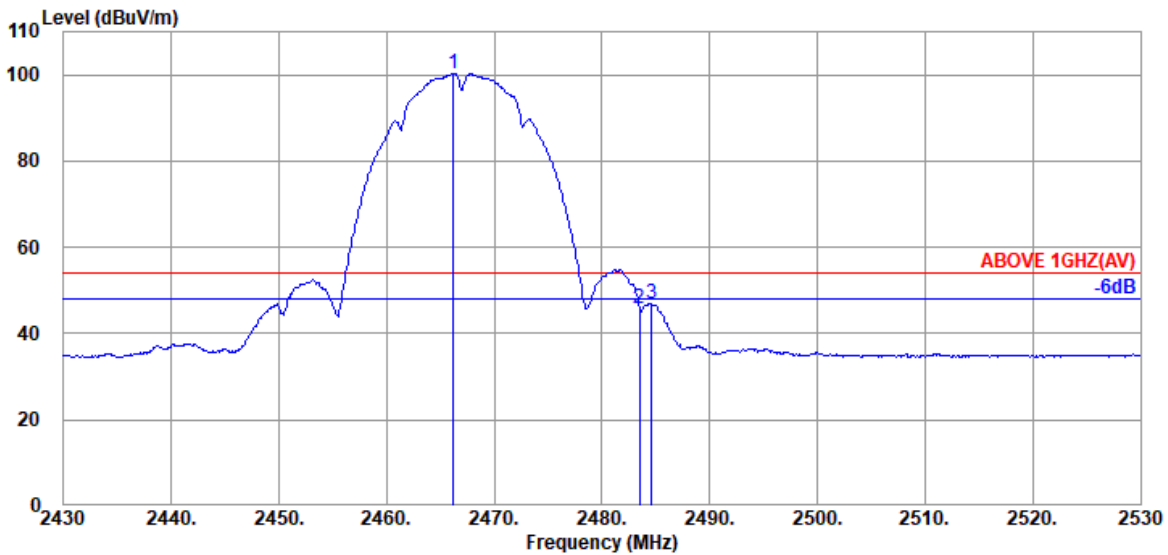


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.200	28.43	5.84	39.92	106.04	100.39	---	---	Average
	2483.500	28.47	5.87	39.92	51.44	45.86	54.00	8.14	Average
	2484.600	28.47	5.87	39.92	52.59	47.01	54.00	6.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

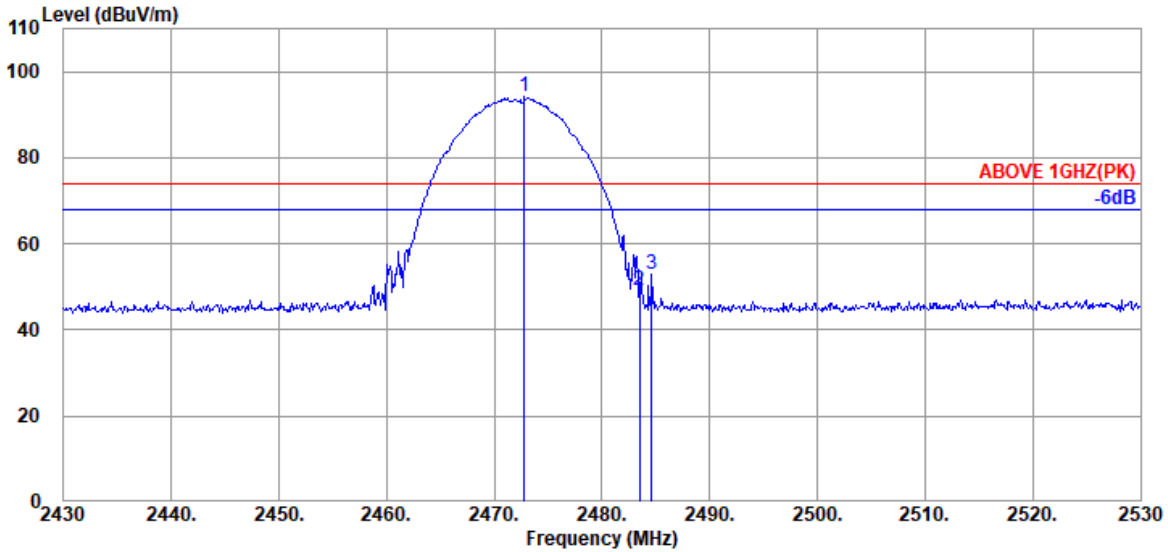

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.44	5.85	39.92	100.00	94.37	---	---	Peak
2483.500	28.47	5.87	39.92	54.70	49.12	74.00	24.88	Peak
2484.600	28.47	5.87	39.92	58.48	52.90	74.00	21.10	Peak

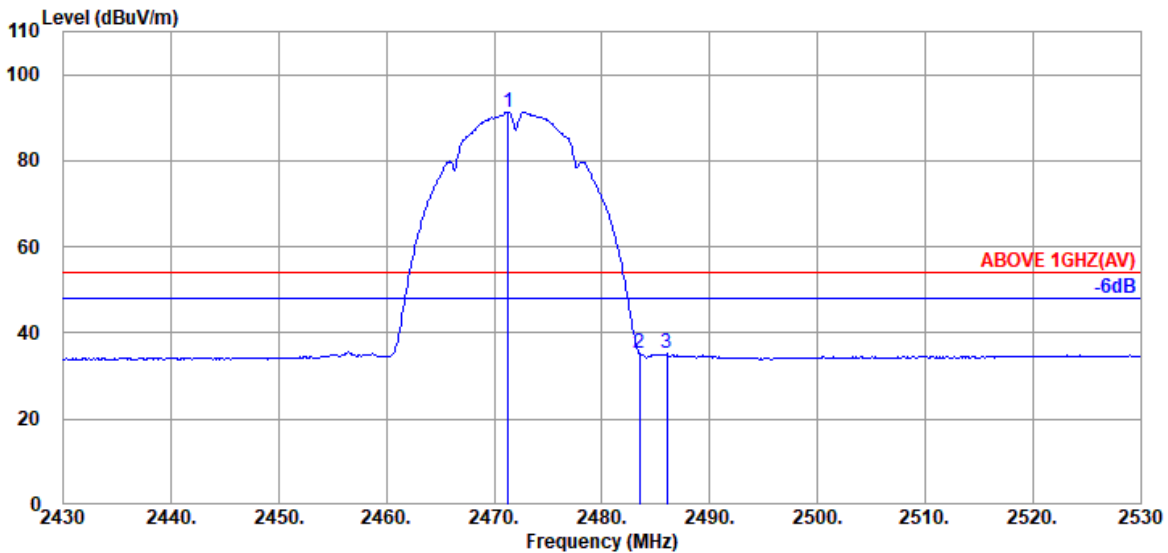


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	5.85	39.92	97.04	91.41	---	---	Average
2483.500	28.47	5.87	39.92	40.72	35.14	54.00	18.86	Average
2486.000	28.47	5.87	39.92	40.75	35.17	54.00	18.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

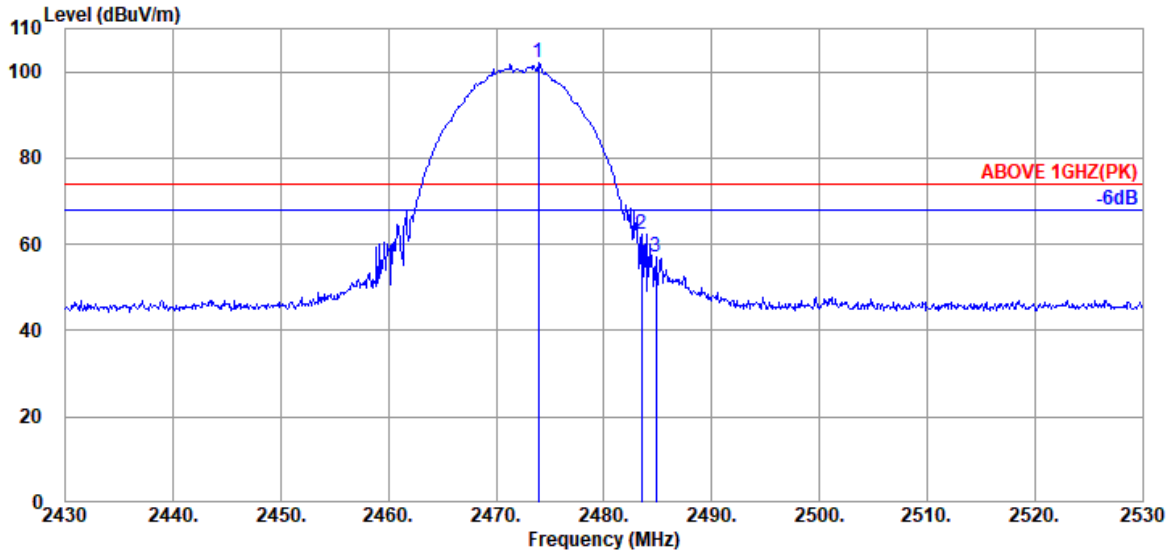

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.900	28.44	5.85	39.92	107.75	102.12	---	---	Peak
2483.500	28.47	5.87	39.92	67.84	62.26	74.00	11.74	Peak
2484.800	28.47	5.87	39.92	62.53	56.95	74.00	17.05	Peak

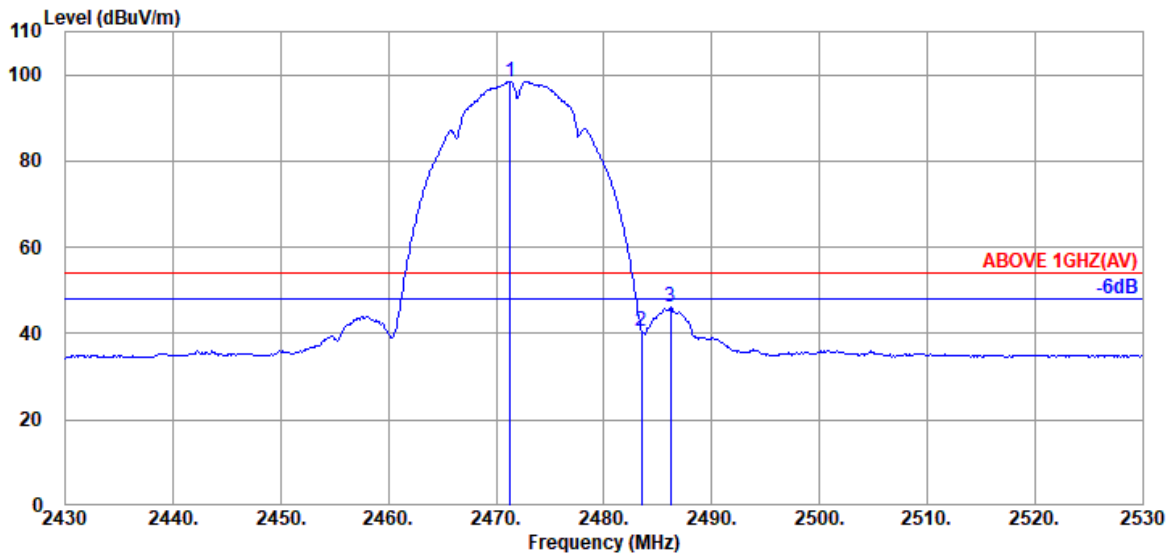


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	5.85	39.92	104.04	98.41	---	---	Average
2483.500	28.47	5.87	39.92	46.11	40.53	54.00	13.47	Average
2486.200	28.47	5.87	39.92	51.67	46.09	54.00	7.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

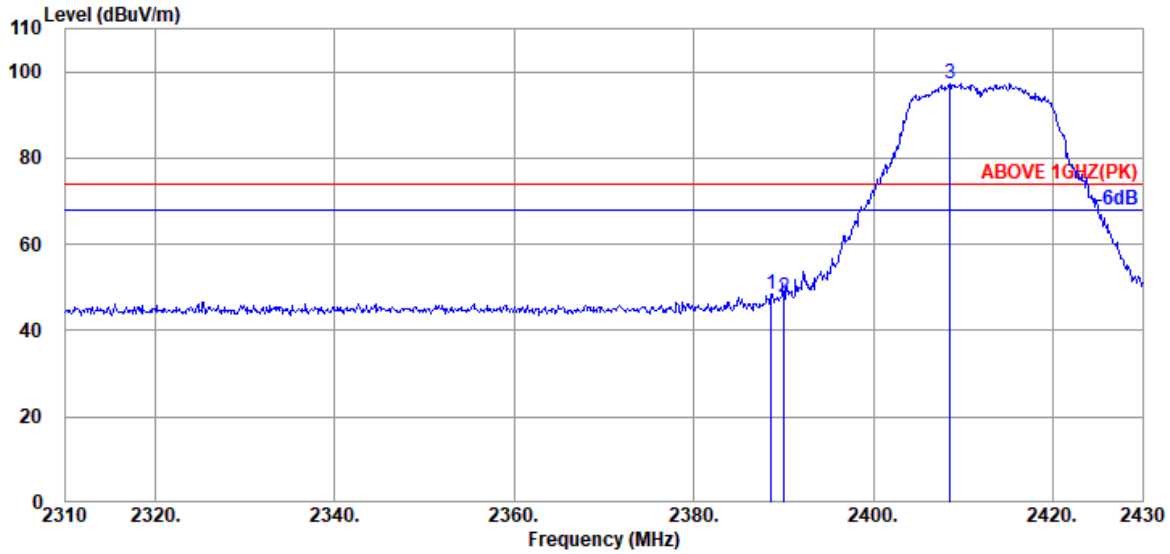

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.21	5.72	39.93	54.51	48.51	74.00	25.49	Peak
2390.040	28.21	5.72	39.93	53.86	47.86	74.00	26.14	Peak
@ 2408.520	28.14	5.75	39.93	103.38	97.34	---	---	Peak

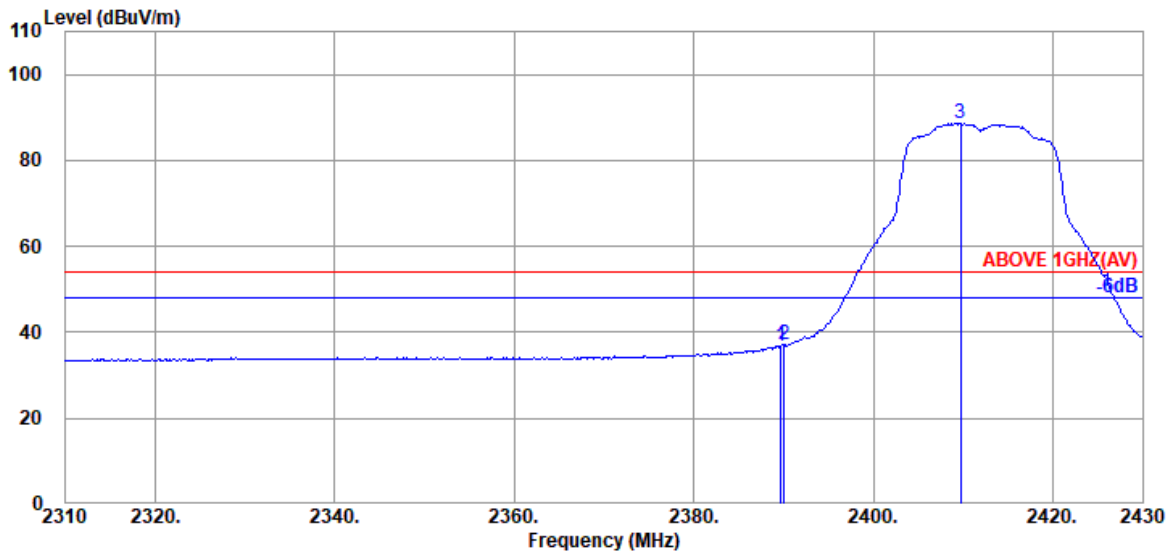


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	42.98	36.98	54.00	17.02	Average
2390.040	28.21	5.72	39.93	43.02	37.02	54.00	16.98	Average
@ 2409.720	28.14	5.75	39.93	94.63	88.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

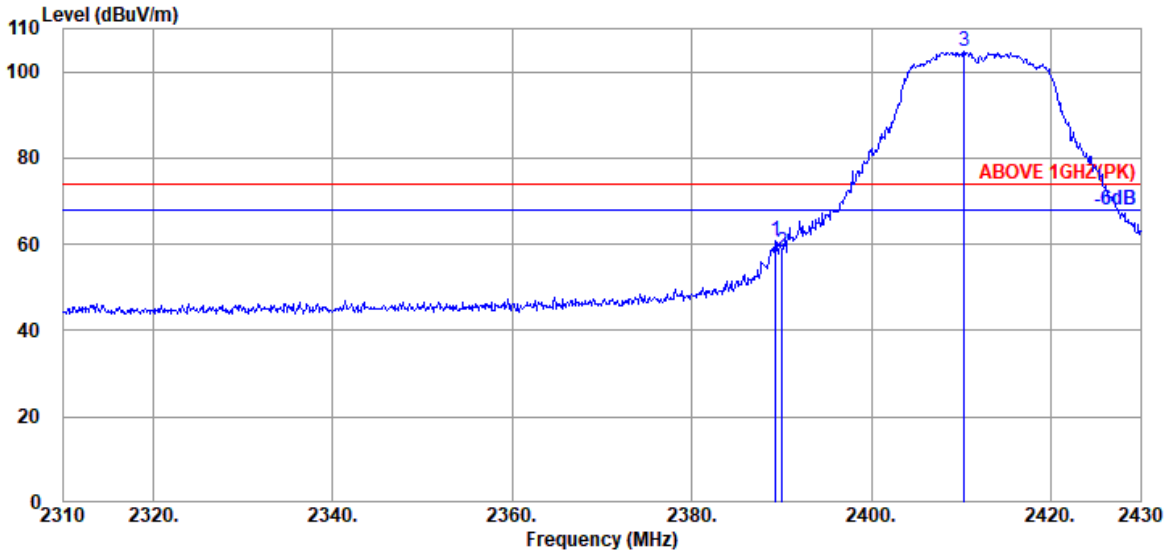

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	66.98	60.98	74.00	13.02	Peak
2390.040	28.21	5.72	39.93	64.12	58.12	74.00	15.88	Peak
@ 2410.320	28.14	5.75	39.93	110.65	104.61	---	---	Peak

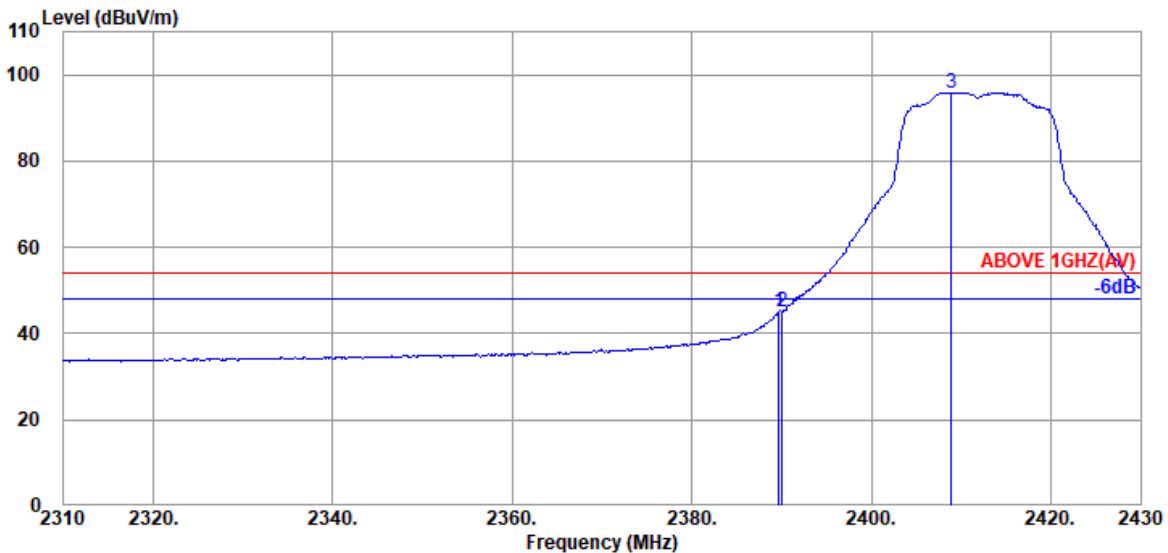


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	50.93	44.93	54.00	9.07	Average
2390.040	28.21	5.72	39.93	51.03	45.03	54.00	8.97	Average
@ 2408.880	28.14	5.75	39.93	101.93	95.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

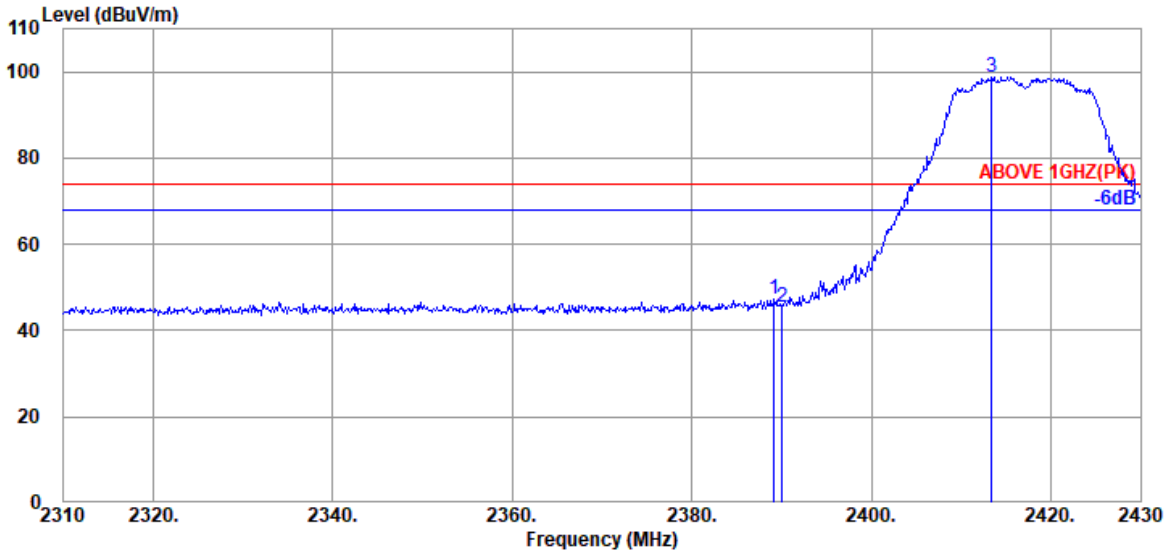

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.21	5.72	39.93	53.34	47.34	74.00	26.66	Peak
2390.040	28.21	5.72	39.93	51.53	45.53	74.00	28.47	Peak
@ 2413.440	28.19	5.76	39.93	104.65	98.67	---	---	Peak

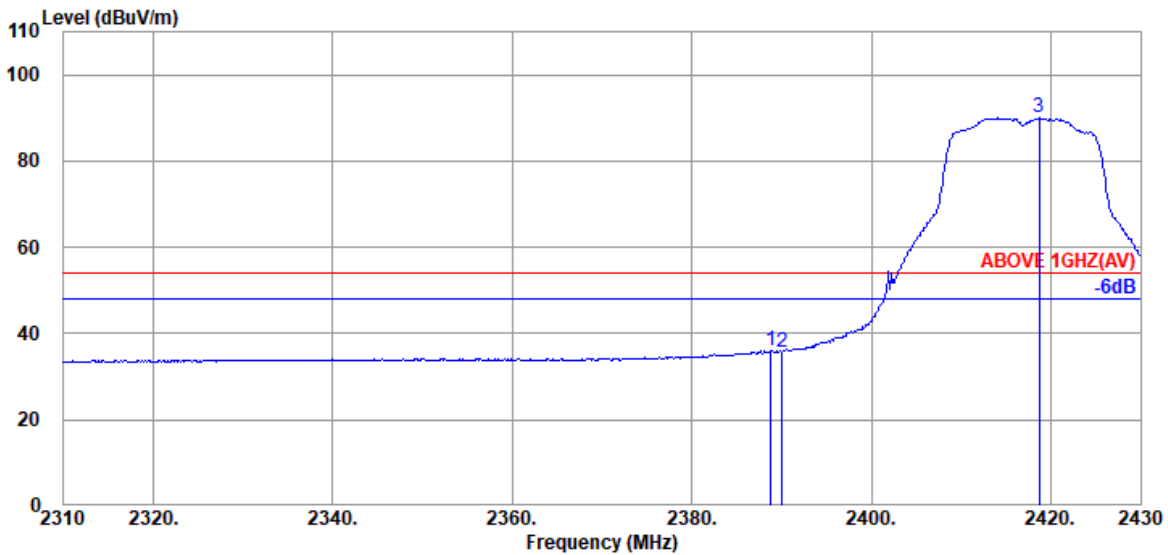


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.21	5.72	39.93	41.95	35.95	54.00	18.05	Average
2390.040	28.21	5.72	39.93	41.74	35.74	54.00	18.26	Average
@ 2418.720	28.23	5.77	39.93	95.89	89.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

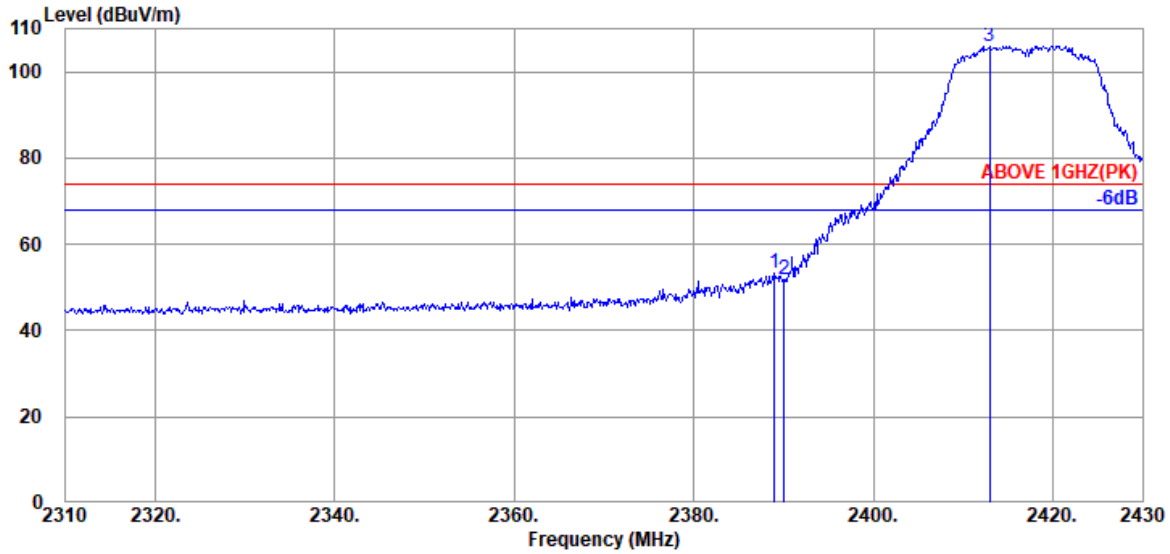

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.21	5.72	39.93	59.47	53.47	74.00	20.53	Peak
2390.040	28.21	5.72	39.93	57.63	51.63	74.00	22.37	Peak
@ 2412.960	28.19	5.76	39.93	112.02	106.04	---	---	Peak

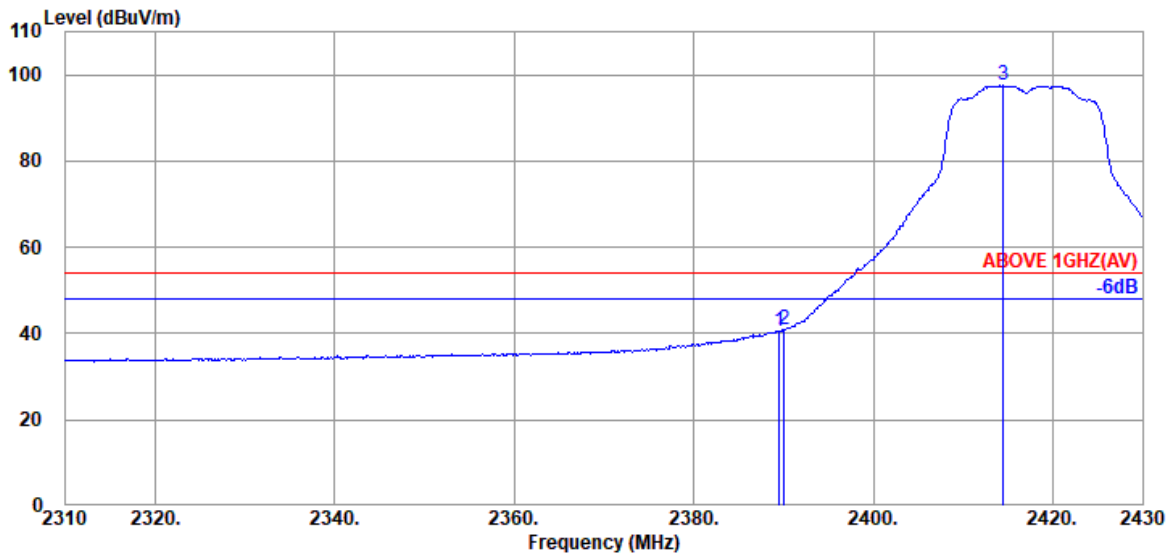


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	46.65	40.65	54.00	13.35	Average
2390.040	28.21	5.72	39.93	46.80	40.80	54.00	13.20	Average
@ 2414.520	28.19	5.76	39.93	103.42	97.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

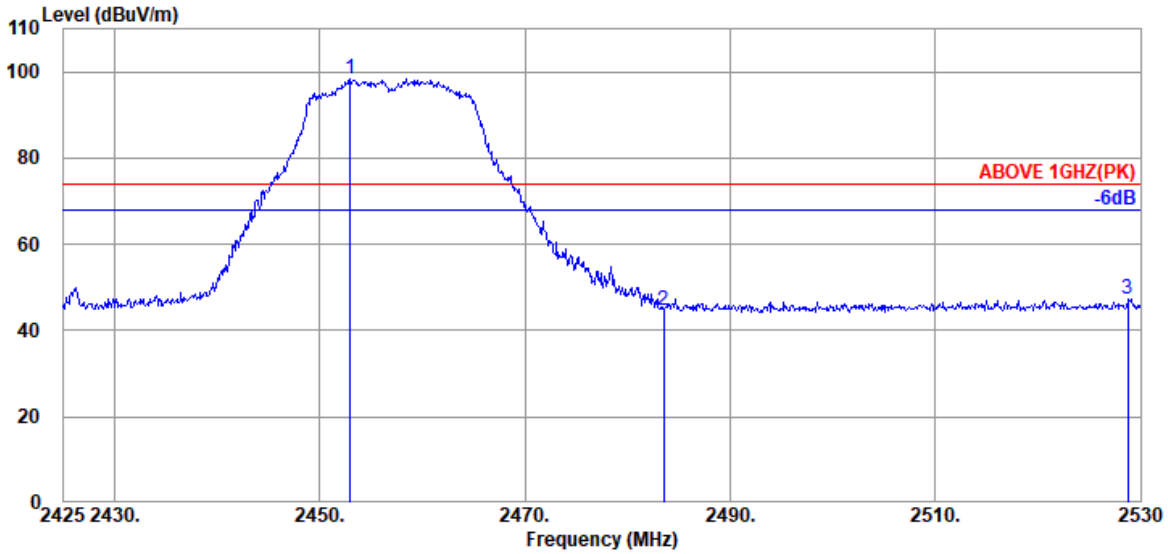

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.930	28.40	5.81	39.92	103.98	98.27	---	---	Peak
	2483.485	28.47	5.87	39.92	50.41	44.83	74.00	29.17	Peak
	2528.740	28.67	5.96	39.93	52.76	47.46	74.00	26.54	Peak

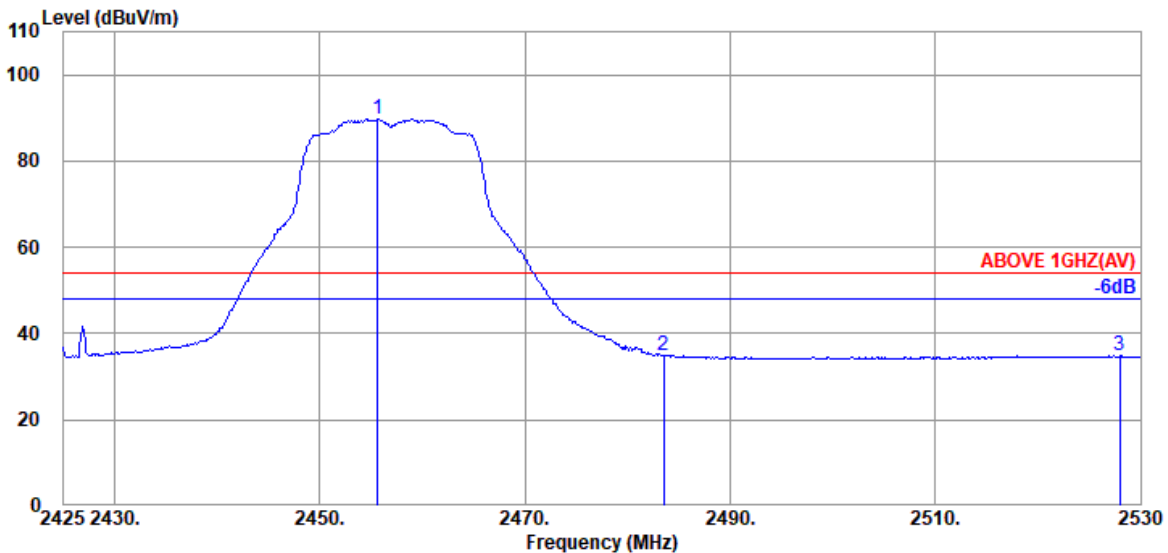


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.660	28.41	5.83	39.92	95.30	89.62	---	---	Average
	2483.485	28.47	5.87	39.92	40.64	35.06	54.00	18.94	Average
	2528.005	28.67	5.96	39.93	40.15	34.85	54.00	19.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

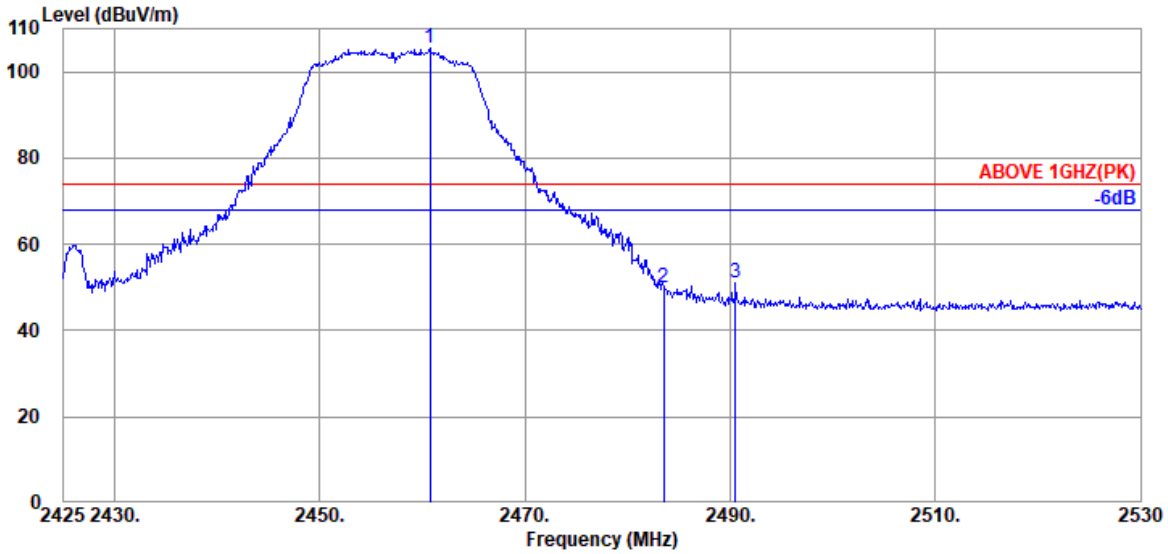

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	28.43	5.84	39.92	111.26	105.61	---	---	Peak
2483.485	28.47	5.87	39.92	55.64	50.06	74.00	23.94	Peak
2490.520	28.49	5.88	39.92	56.49	50.94	74.00	23.06	Peak

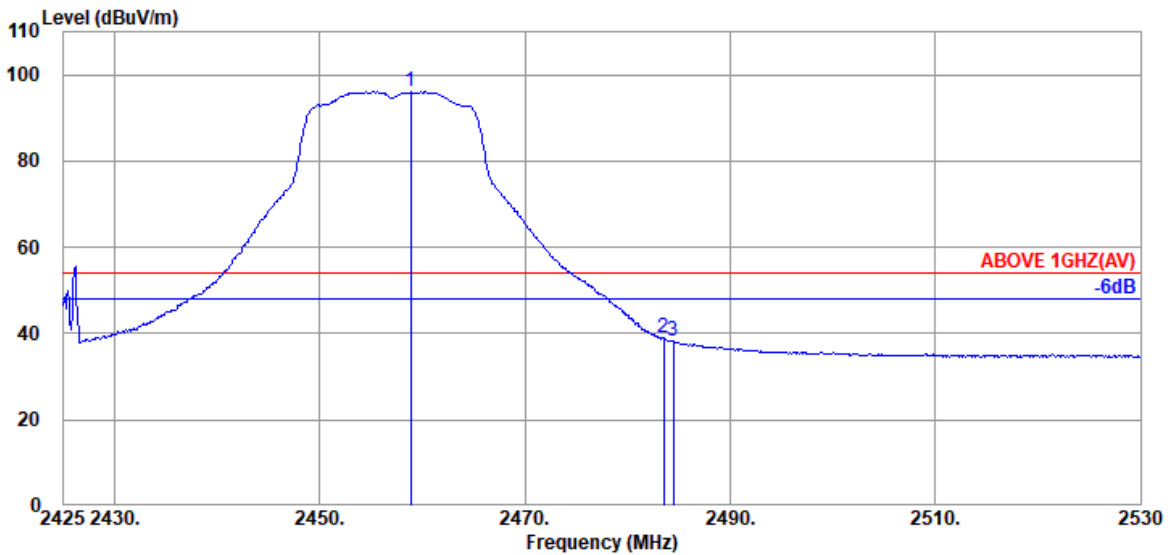

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.810	28.41	5.83	39.92	101.69	96.01	---	---	Average
2483.485	28.47	5.87	39.92	44.60	39.02	54.00	14.98	Average
2484.430	28.47	5.87	39.92	43.79	38.21	54.00	15.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

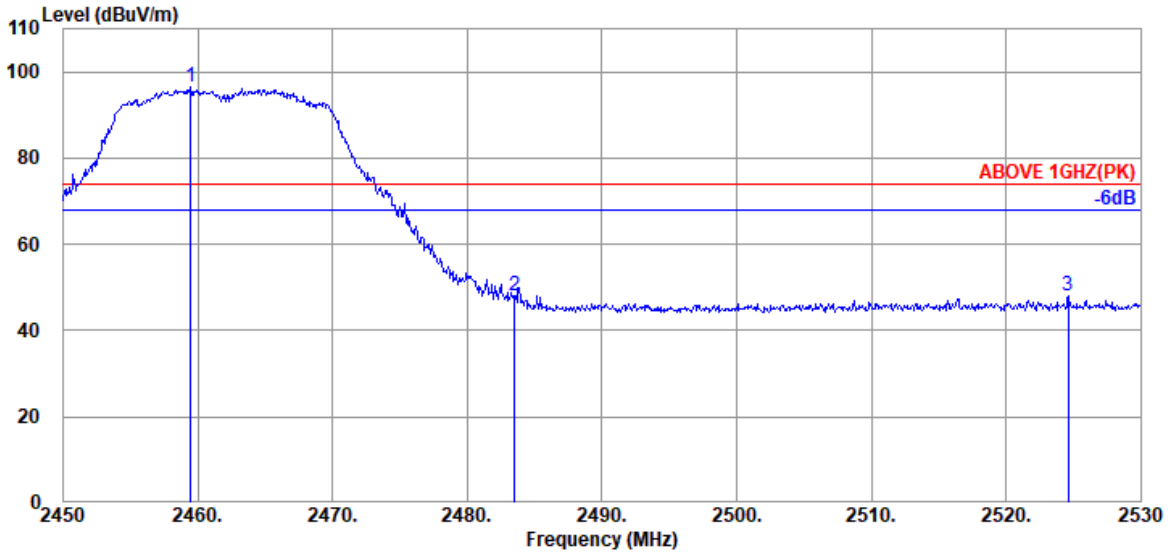

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.440	28.41	5.83	39.92	102.03	96.35	---	---	Peak
	2483.520	28.47	5.87	39.92	53.82	48.24	74.00	25.76	Peak
	2524.640	28.63	5.94	39.93	53.37	48.01	74.00	25.99	Peak

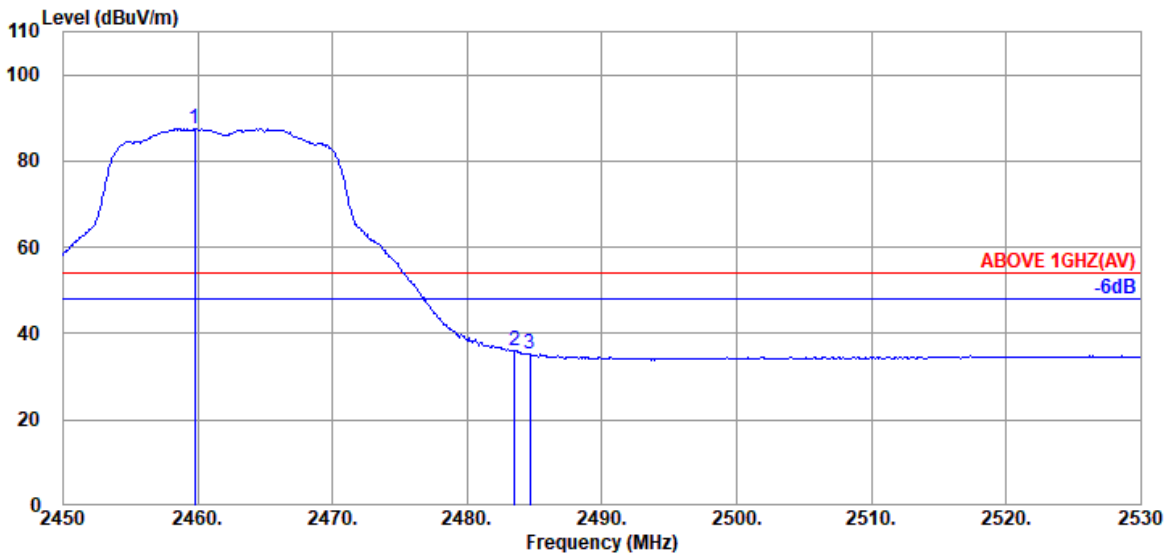


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.760	28.41	5.83	39.92	93.17	87.49	---	---	Average
	2483.520	28.47	5.87	39.92	41.52	35.94	54.00	18.06	Average
	2484.640	28.47	5.87	39.92	40.84	35.26	54.00	18.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

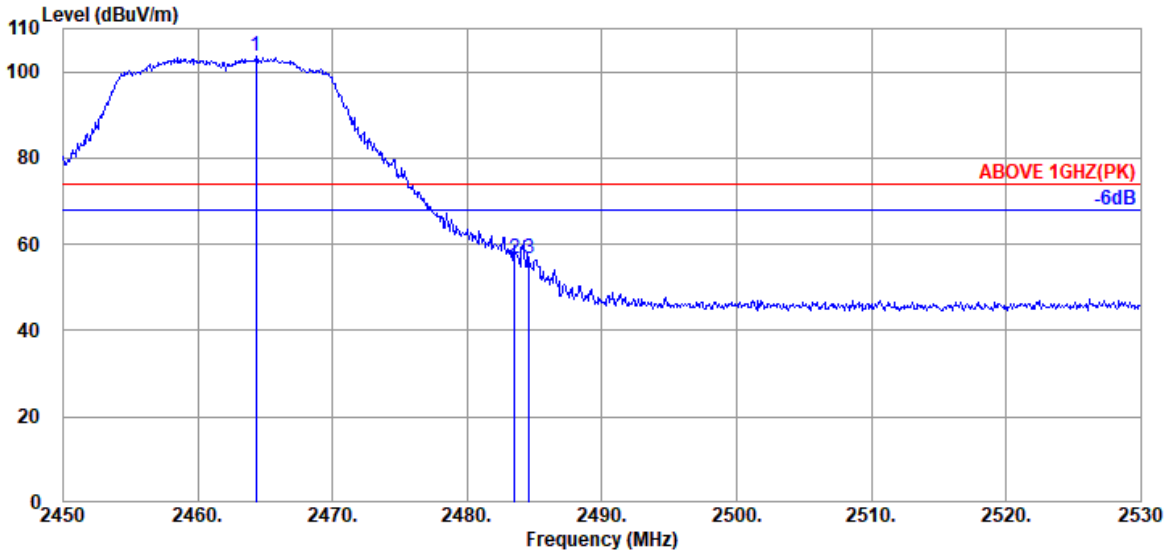

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.320	28.43	5.84	39.92	109.25	103.60	---	---	Peak
	2483.520	28.47	5.87	39.92	62.09	56.51	74.00	17.49	Peak
	2484.560	28.47	5.87	39.92	62.43	56.85	74.00	17.15	Peak

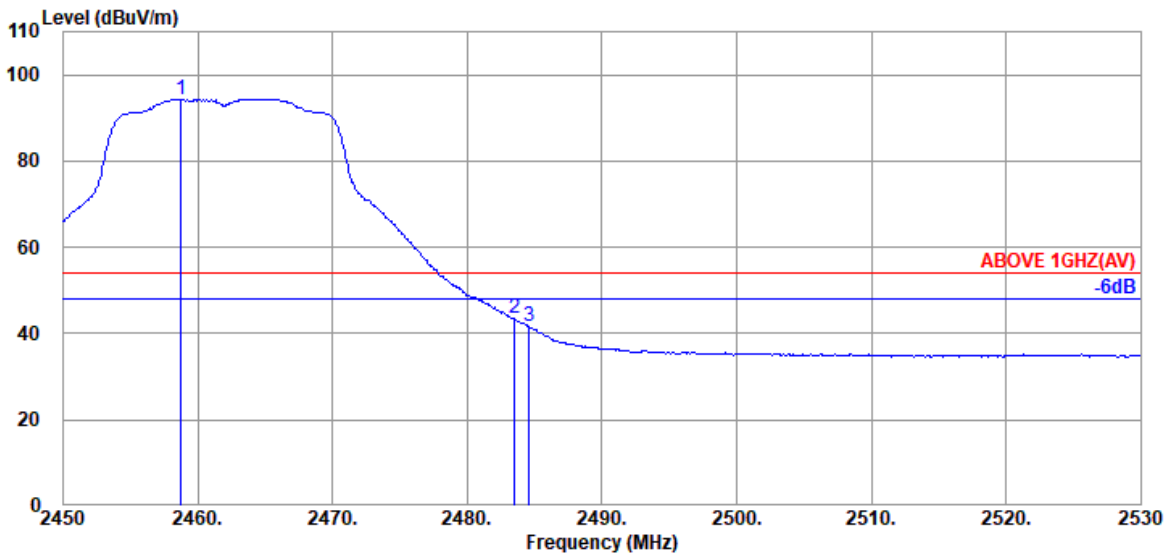


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.720	28.41	5.83	39.92	100.02	94.34	---	---	Average
	2483.520	28.47	5.87	39.92	48.95	43.37	54.00	10.63	Average
	2484.560	28.47	5.87	39.92	47.21	41.63	54.00	12.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

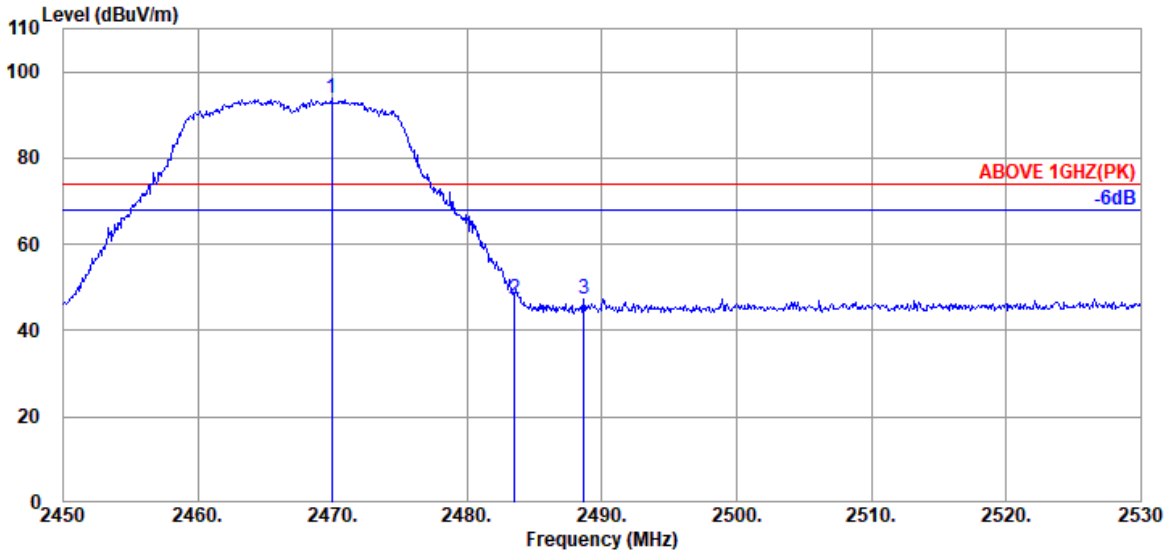

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.920	28.44	5.85	39.92	99.34	93.71	---	---	Peak
	2483.520	28.47	5.87	39.92	52.85	47.27	74.00	26.73	Peak
	2488.640	28.47	5.87	39.92	53.06	47.48	74.00	26.52	Peak

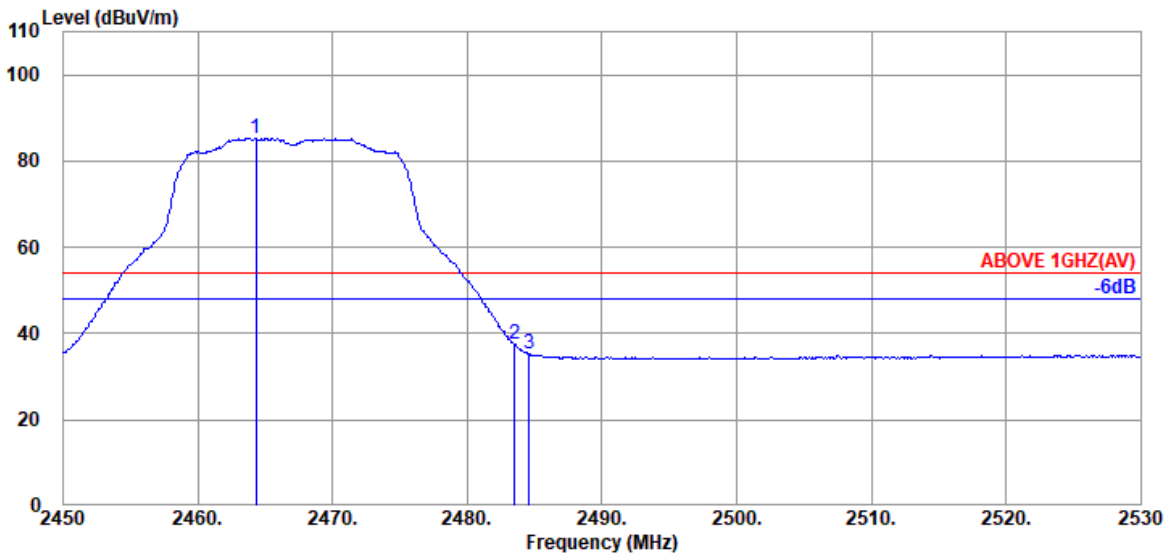


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.320	28.43	5.84	39.92	91.01	85.36	---	---	Average
	2483.520	28.47	5.87	39.92	43.22	37.64	54.00	16.36	Average
	2484.560	28.47	5.87	39.92	41.00	35.42	54.00	18.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

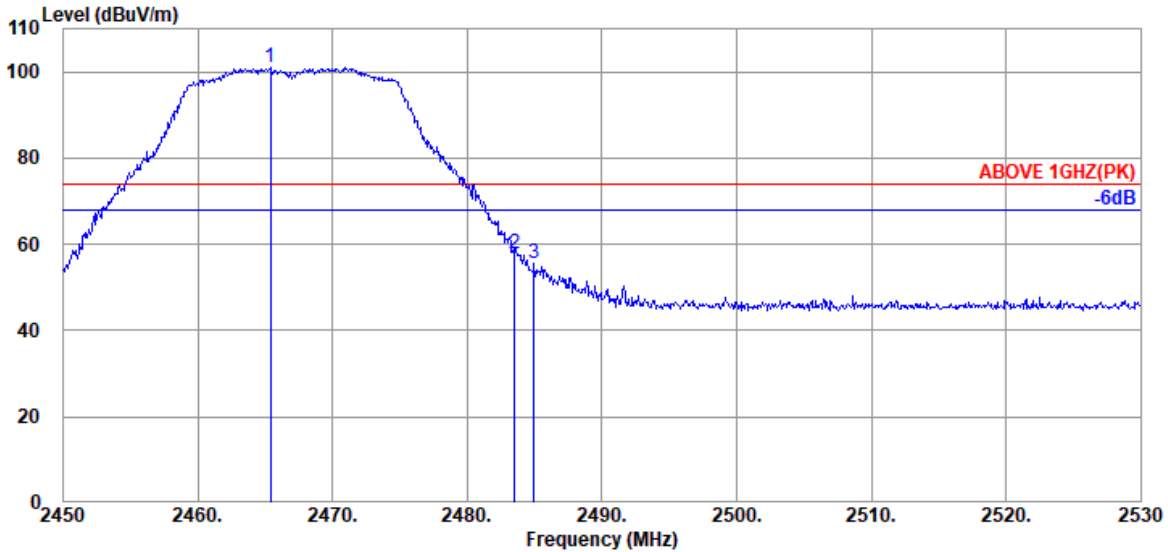

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.360	28.43	5.84	39.92	106.56	100.91	---	---	Peak
	2483.520	28.47	5.87	39.92	63.28	57.70	74.00	16.30	Peak
	2484.960	28.47	5.87	39.92	61.24	55.66	74.00	18.34	Peak

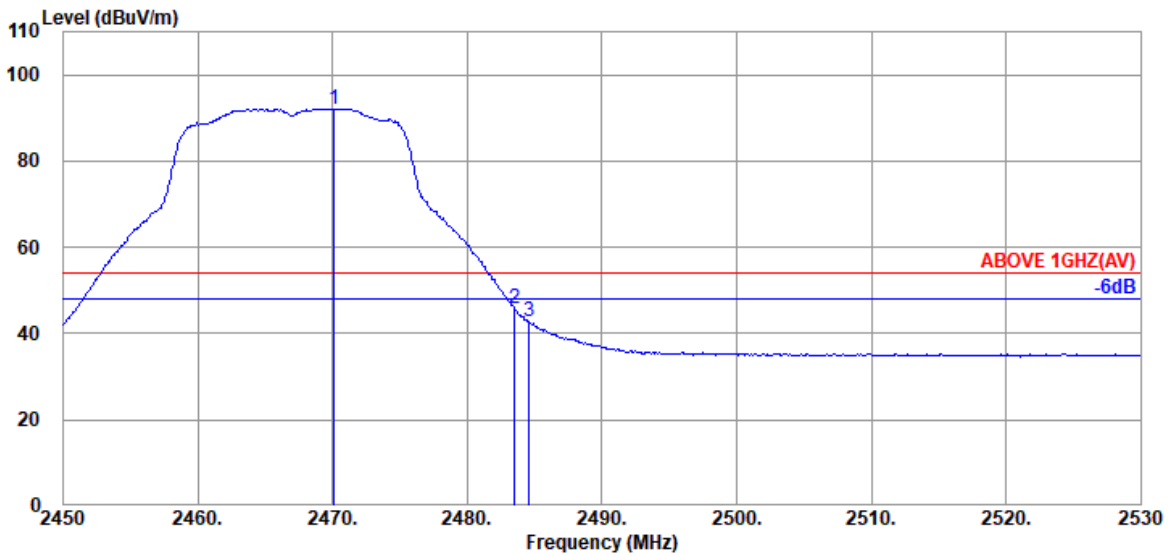


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.080	28.44	5.85	39.92	97.74	92.11	---	---	Average
	2483.520	28.47	5.87	39.92	51.35	45.77	54.00	8.23	Average
	2484.560	28.47	5.87	39.92	48.26	42.68	54.00	11.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

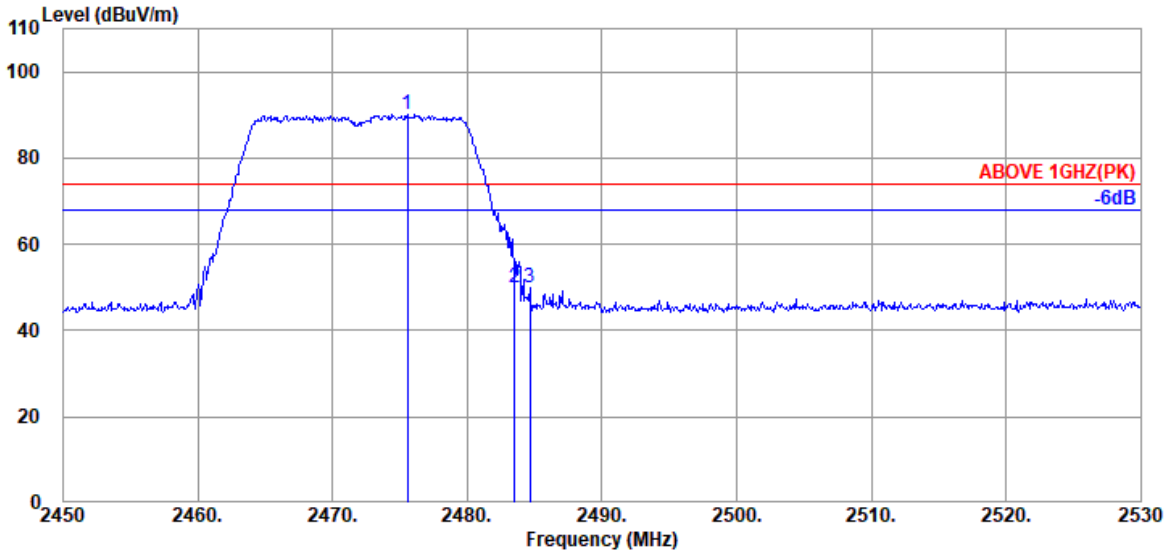

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2475.520	28.46	5.86	39.92	95.86	90.26	---	---	Peak
	2483.520	28.47	5.87	39.92	55.38	49.80	74.00	24.20	Peak
	2484.640	28.47	5.87	39.92	55.47	49.89	74.00	24.11	Peak

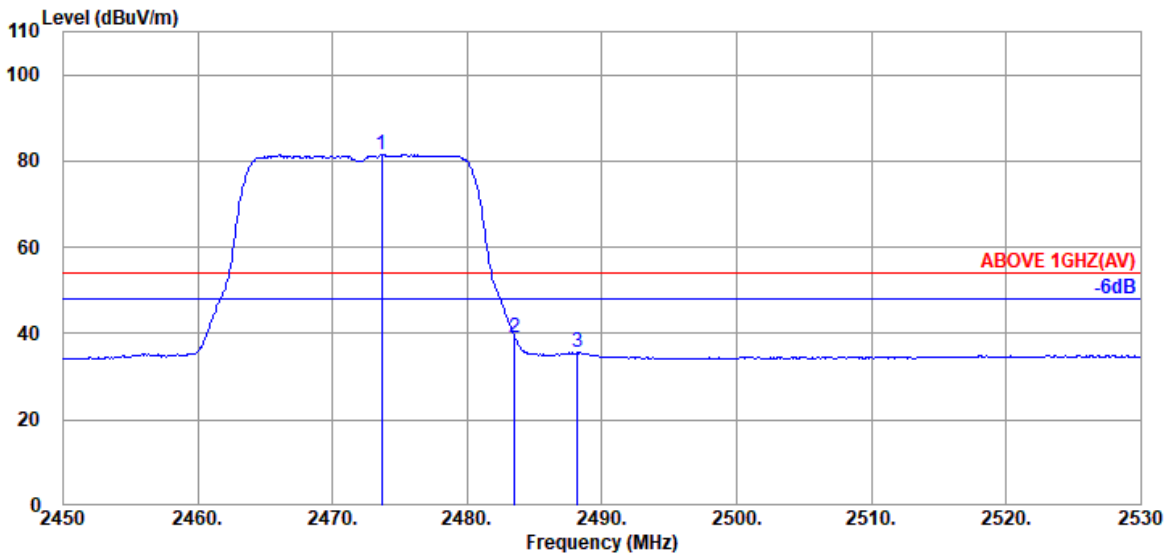


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.600	28.44	5.85	39.92	87.26	81.63	---	---	Average
	2483.520	28.47	5.87	39.92	44.62	39.04	54.00	14.96	Average
	2488.160	28.47	5.87	39.92	41.13	35.55	54.00	18.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

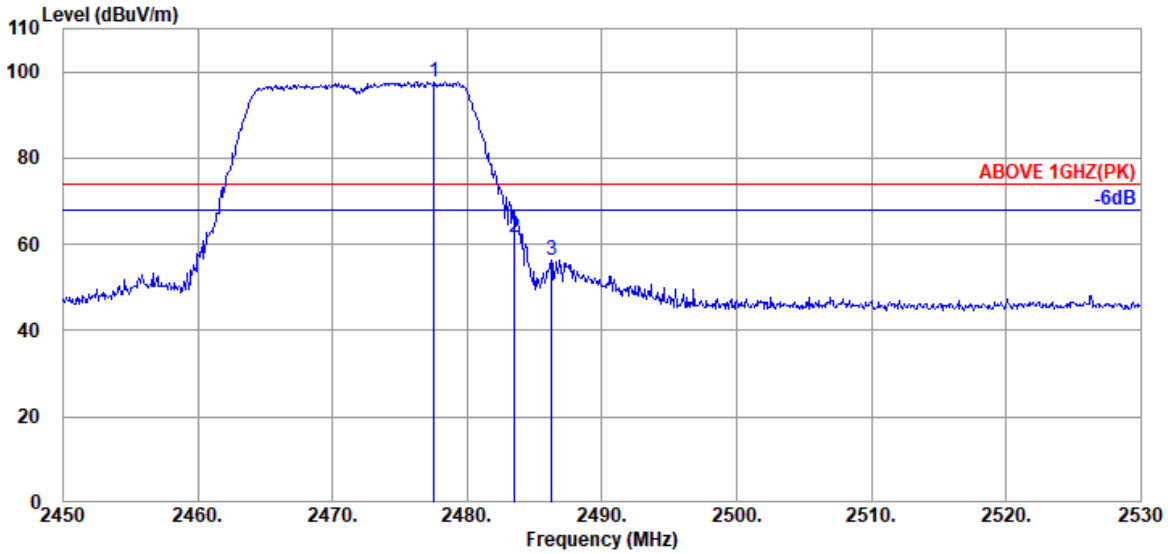

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.520	28.46	5.86	39.92	103.31	97.71	---	---	Peak
2483.520	28.47	5.87	39.92	67.25	61.67	74.00	12.33	Peak
2486.240	28.47	5.87	39.92	62.04	56.46	74.00	17.54	Peak

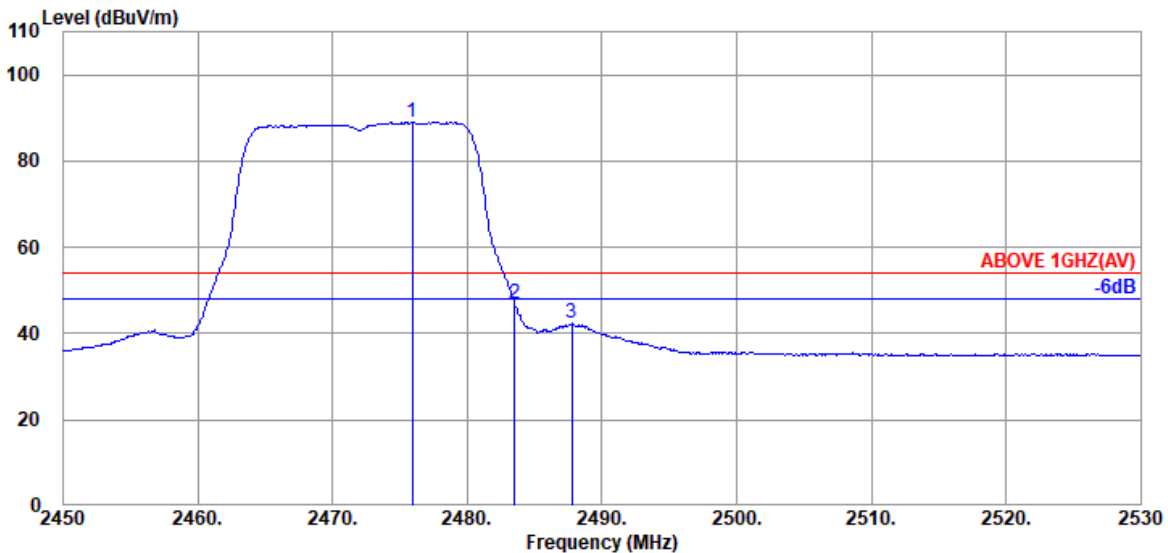


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.920	28.46	5.86	39.92	94.64	89.04	---	---	Average
2483.520	28.47	5.87	39.92	52.57	46.99	54.00	7.01	Average
2487.760	28.47	5.87	39.92	48.06	42.48	54.00	11.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

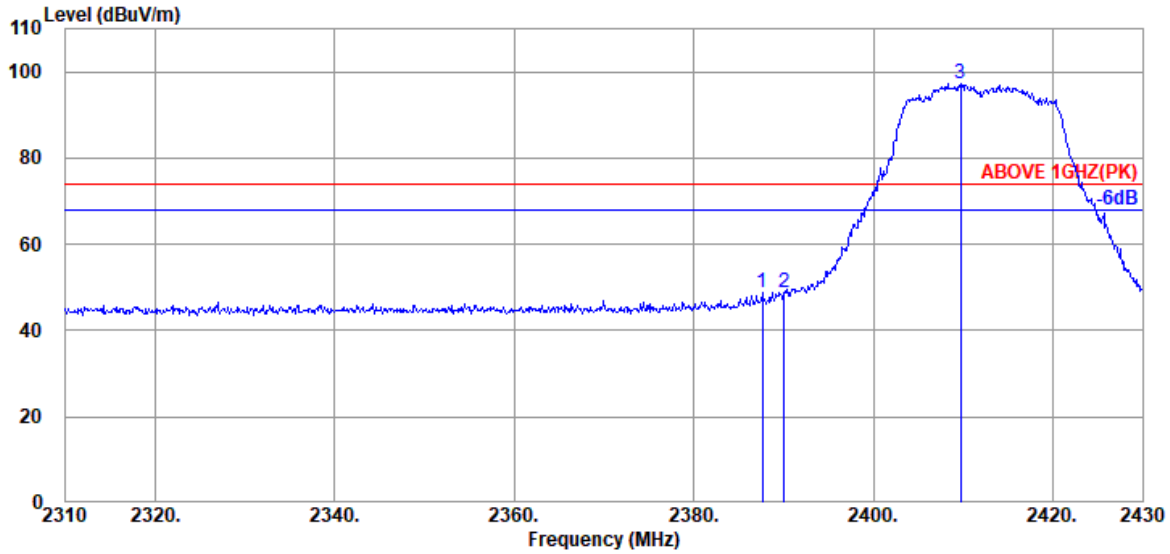

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.640	28.21	5.72	39.93	54.79	48.79	74.00	25.21	Peak
2390.040	28.21	5.72	39.93	54.83	48.83	74.00	25.17	Peak
@ 2409.720	28.14	5.75	39.93	103.41	97.37	---	---	Peak

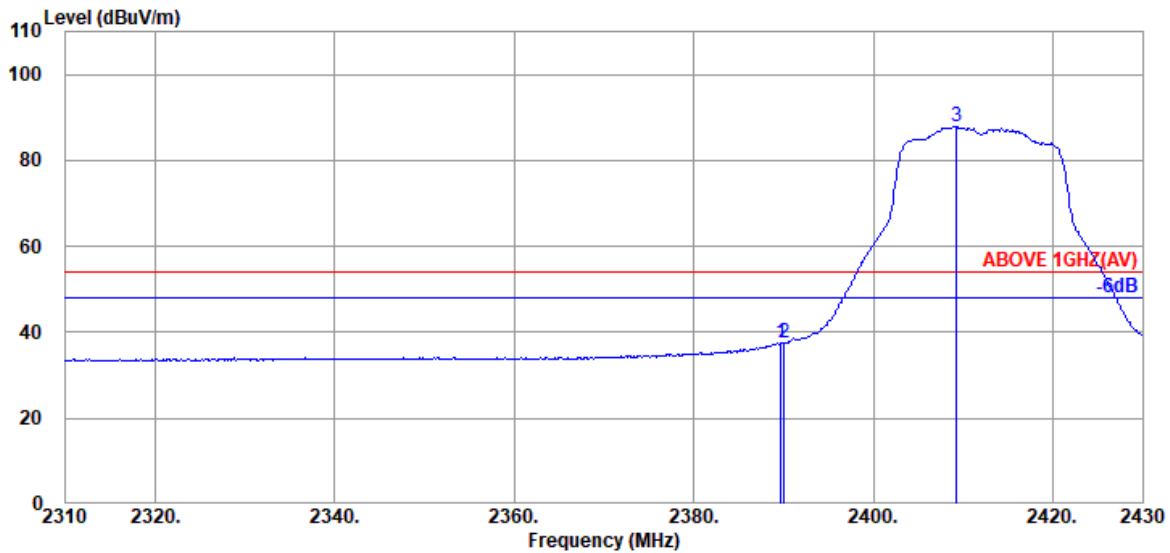


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	43.53	37.53	54.00	16.47	Average
2390.040	28.21	5.72	39.93	43.59	37.59	54.00	16.41	Average
@ 2409.240	28.14	5.75	39.93	93.86	87.82	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

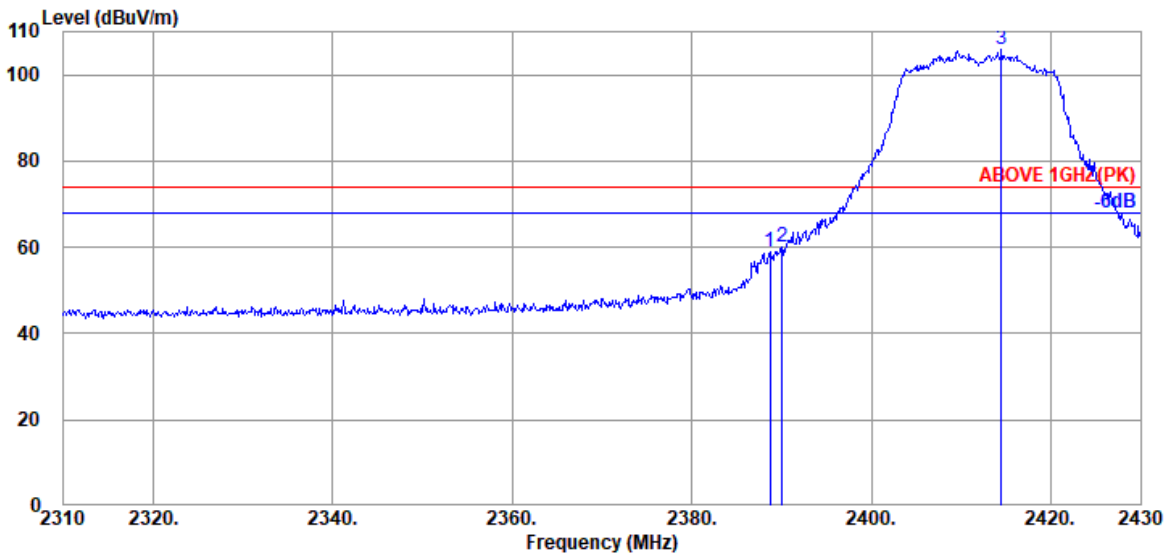

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.21	5.72	39.93	65.10	59.10	74.00	14.90	Peak
2390.040	28.21	5.72	39.93	65.89	59.89	74.00	14.11	Peak
@ 2414.520	28.19	5.76	39.93	111.67	105.69	---	---	Peak

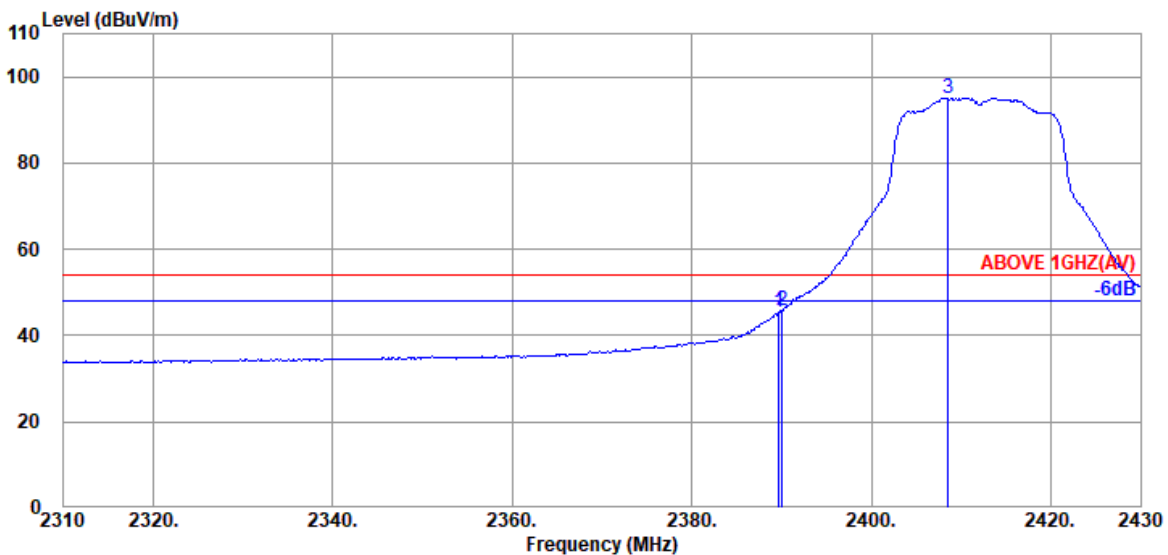


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	51.29	45.29	54.00	8.71	Average
2390.040	28.21	5.72	39.93	51.76	45.76	54.00	8.24	Average
@ 2408.520	28.14	5.75	39.93	101.07	95.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

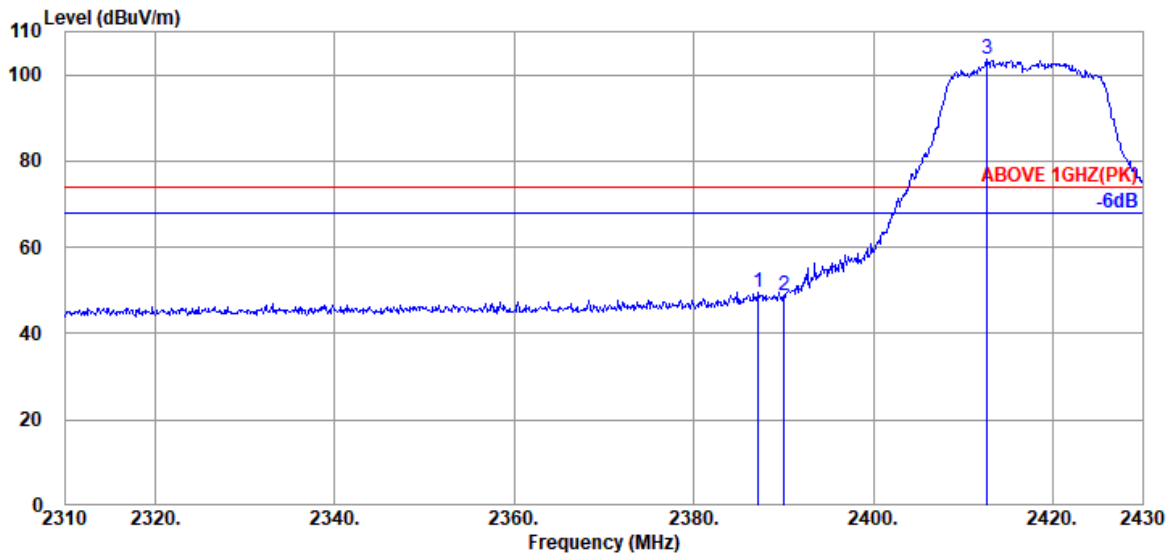

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.160	28.21	5.72	39.93	55.67	49.67	74.00	24.33	Peak
2390.040	28.21	5.72	39.93	54.68	48.68	74.00	25.32	Peak
@ 2412.720	28.19	5.76	39.93	109.61	103.63	---	---	Peak

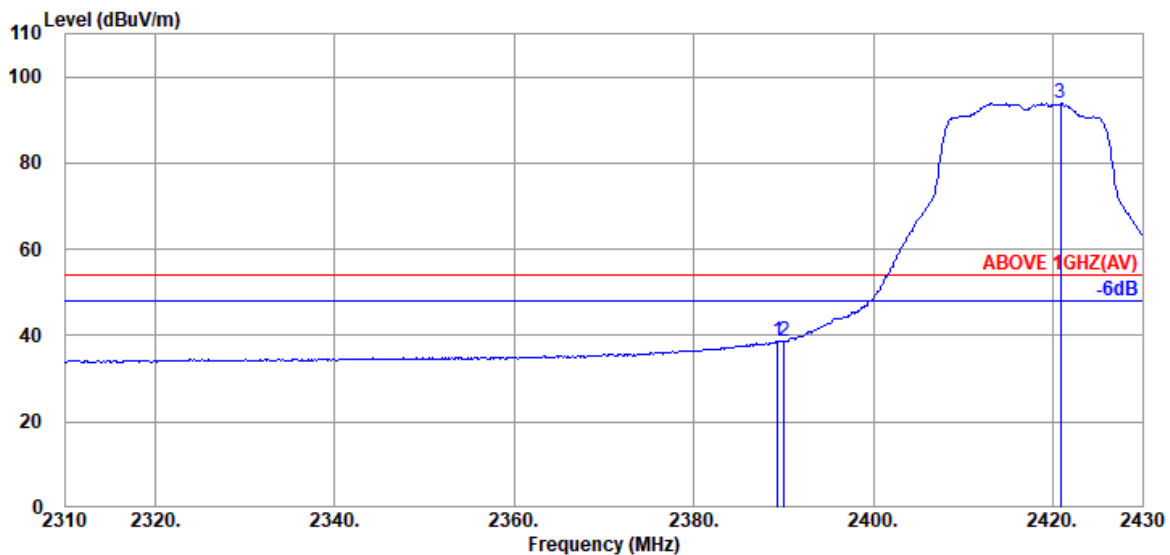


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	44.60	38.60	54.00	15.40	Average
2390.040	28.21	5.72	39.93	44.80	38.80	54.00	15.20	Average
@ 2420.880	28.23	5.77	39.93	99.81	93.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

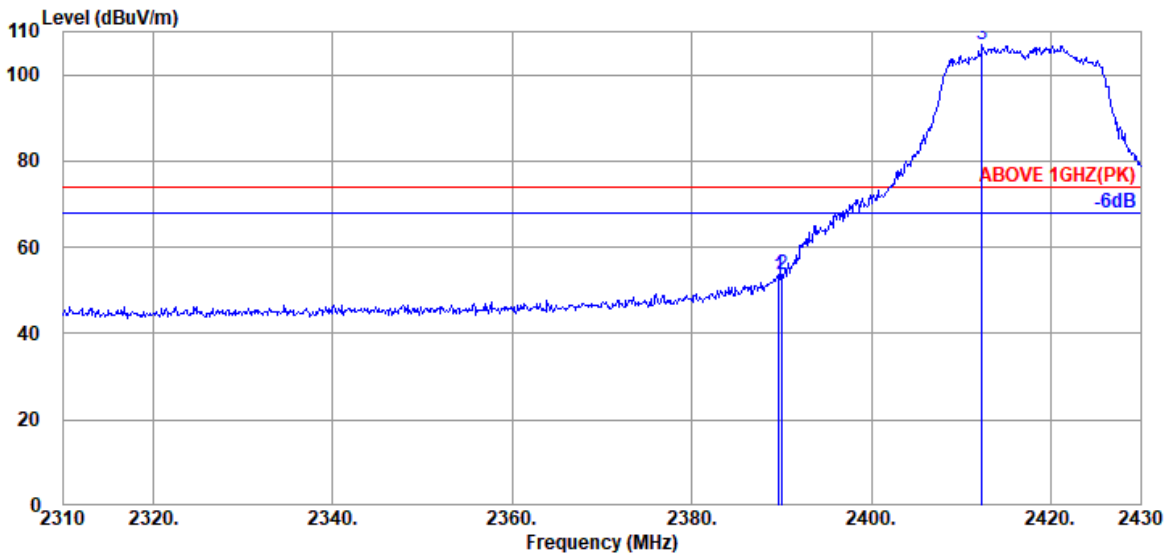

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	59.47	53.47	74.00	20.53	Peak
2390.040	28.21	5.72	39.93	59.51	53.51	74.00	20.49	Peak
@ 2412.360	28.19	5.76	39.93	112.80	106.82	---	---	Peak

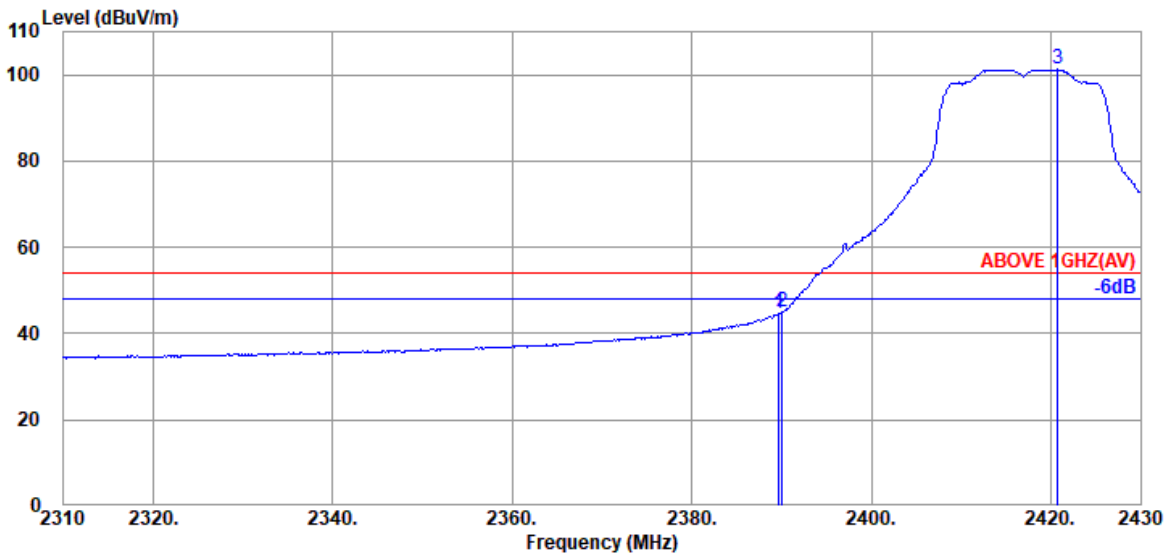


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	50.63	44.63	54.00	9.37	Average
2390.040	28.21	5.72	39.93	50.95	44.95	54.00	9.05	Average
@ 2420.760	28.23	5.77	39.93	107.11	101.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

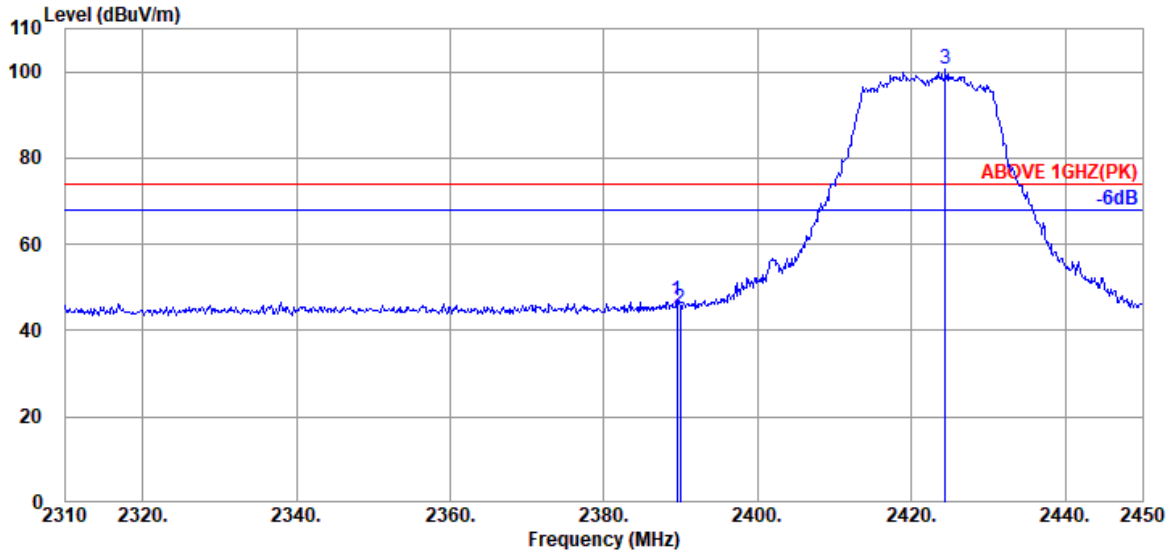

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.21	5.72	39.93	52.96	46.96	74.00	27.04	Peak
2389.940	28.21	5.72	39.93	50.91	44.91	74.00	29.09	Peak
@ 2424.380	28.23	5.77	39.93	106.44	100.51	---	---	Peak

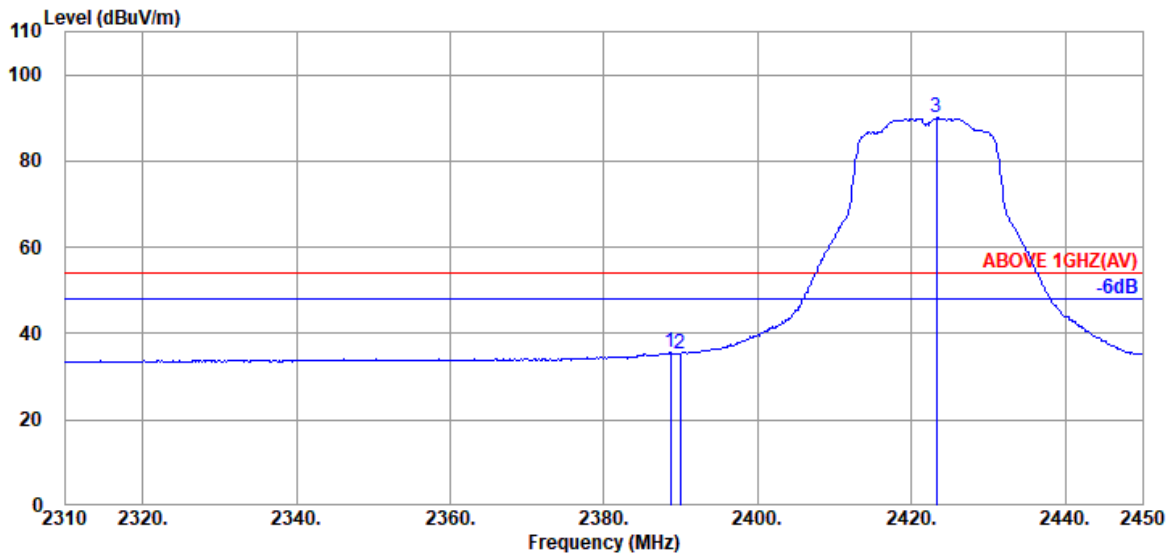


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.680	28.21	5.72	39.93	41.59	35.59	54.00	18.41	Average
2389.940	28.21	5.72	39.93	41.43	35.43	54.00	18.57	Average
@ 2423.260	28.23	5.77	39.93	95.90	89.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

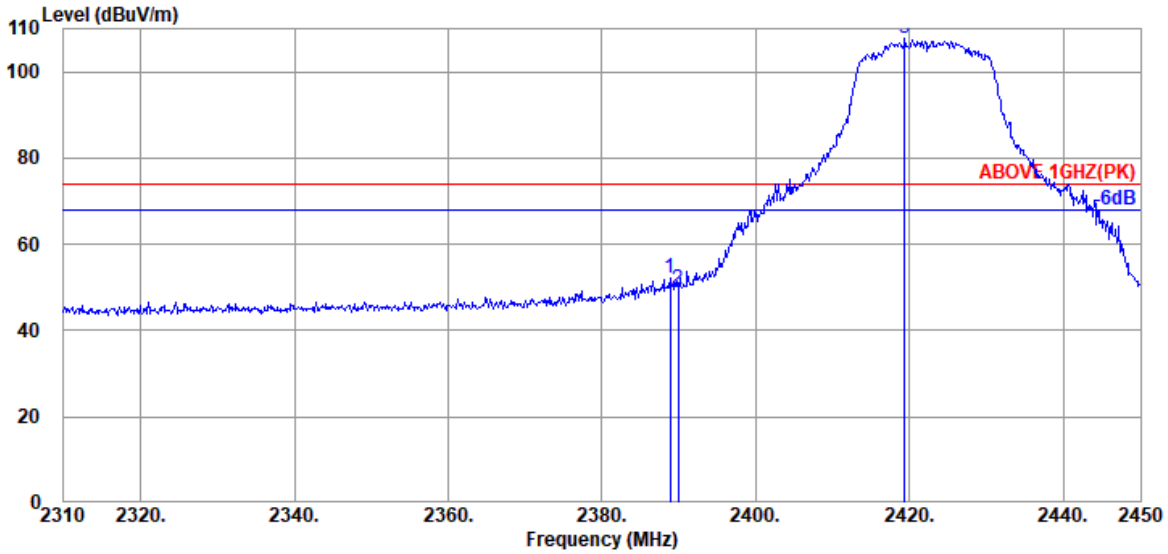

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.820	28.21	5.72	39.93	58.32	52.32	74.00	21.68	Peak
2389.940	28.21	5.72	39.93	55.41	49.41	74.00	24.59	Peak
@ 2419.340	28.23	5.77	39.93	113.83	107.90	---	---	Peak

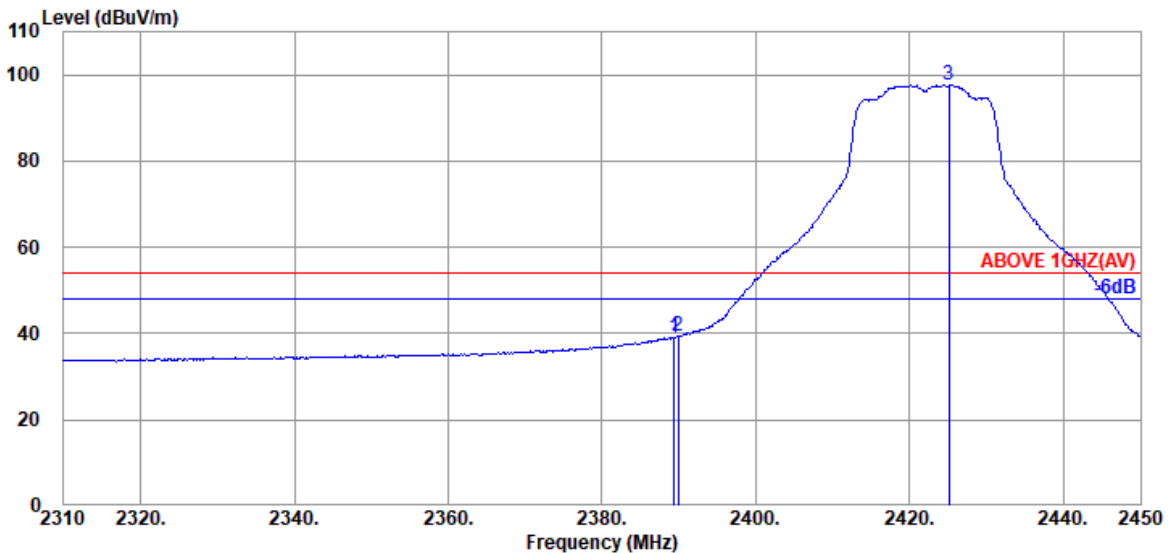


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.380	28.21	5.72	39.93	45.14	39.14	54.00	14.86	Average
2389.940	28.21	5.72	39.93	45.29	39.29	54.00	14.71	Average
@ 2425.080	28.23	5.77	39.93	103.53	97.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

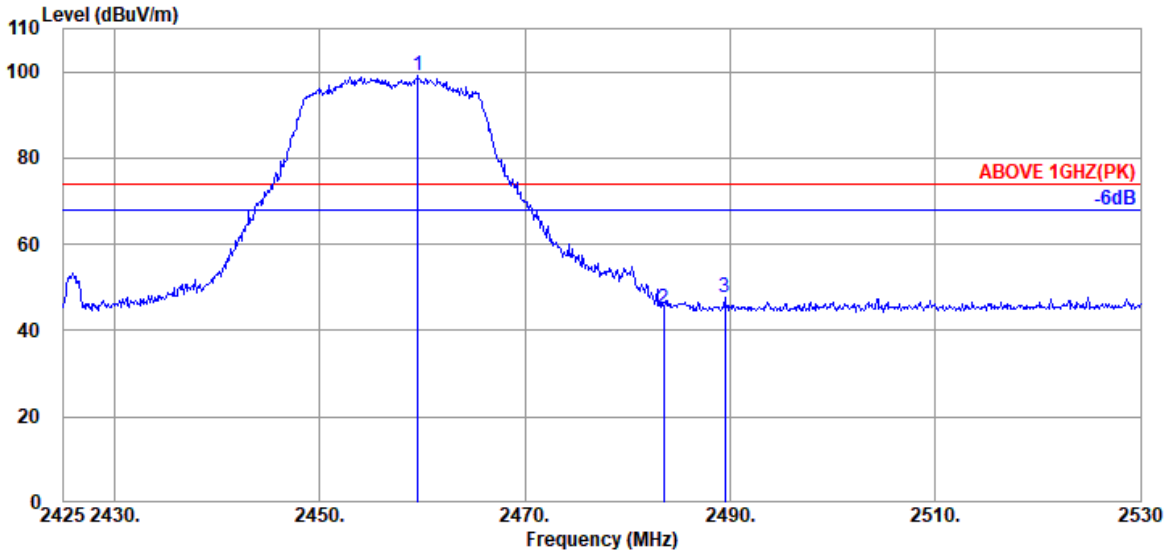

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.545	28.41	5.83	39.92	104.62	98.94	---	---	Peak
	2483.485	28.47	5.87	39.92	50.76	45.18	74.00	28.82	Peak
	2489.470	28.49	5.88	39.92	53.34	47.79	74.00	26.21	Peak

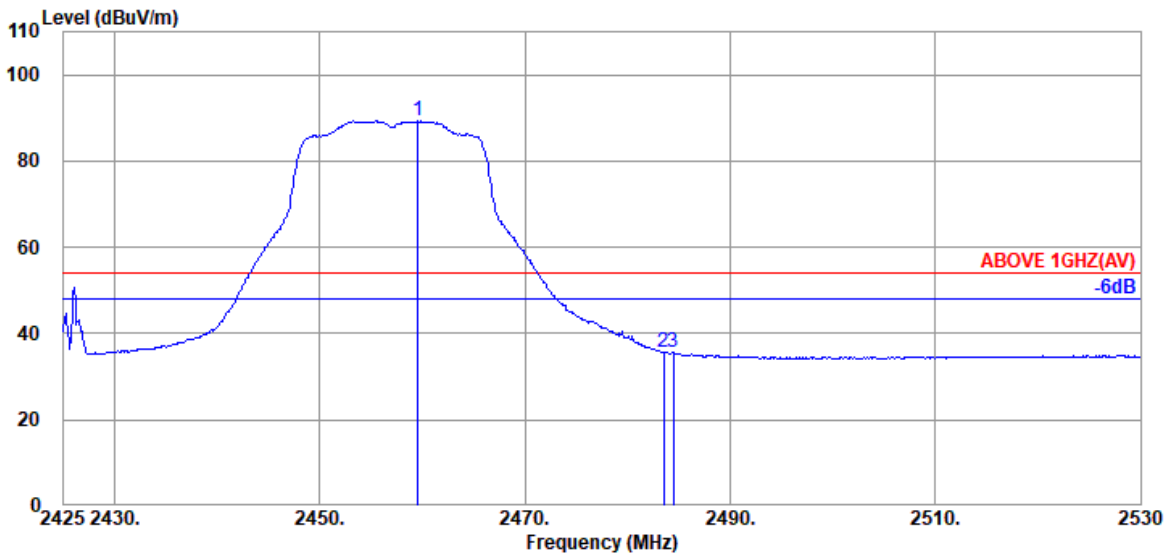


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.545	28.41	5.83	39.92	95.08	89.40	---	---	Average
	2483.485	28.47	5.87	39.92	41.27	35.69	54.00	18.31	Average
	2484.430	28.47	5.87	39.92	41.19	35.61	54.00	18.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

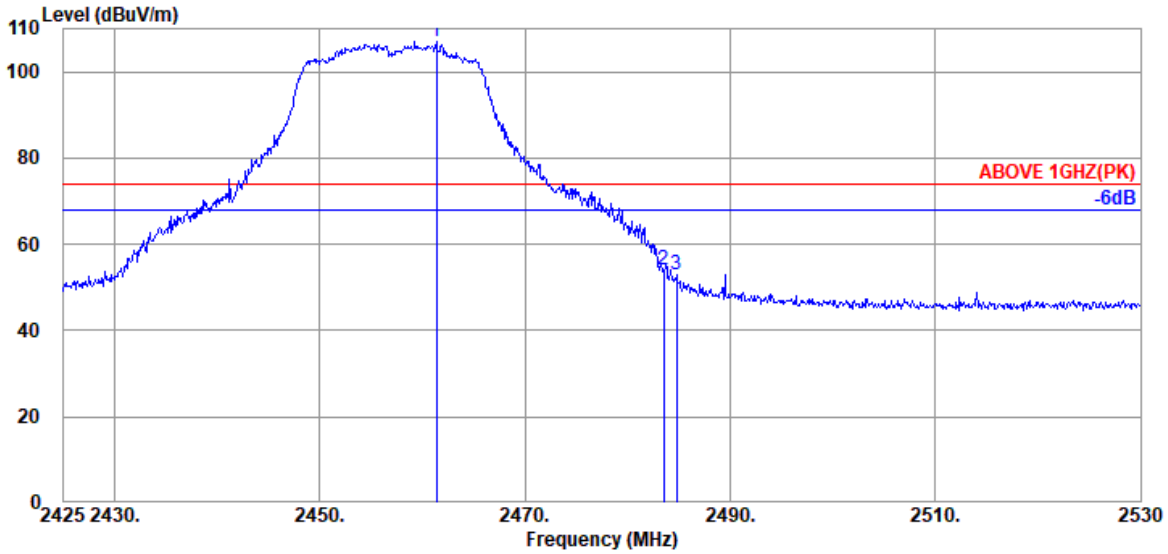

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.330	28.43	5.84	39.92	112.78	107.13	---	---	Peak
	2483.485	28.47	5.87	39.92	59.73	54.15	74.00	19.85	Peak
	2484.745	28.47	5.87	39.92	58.61	53.03	74.00	20.97	Peak

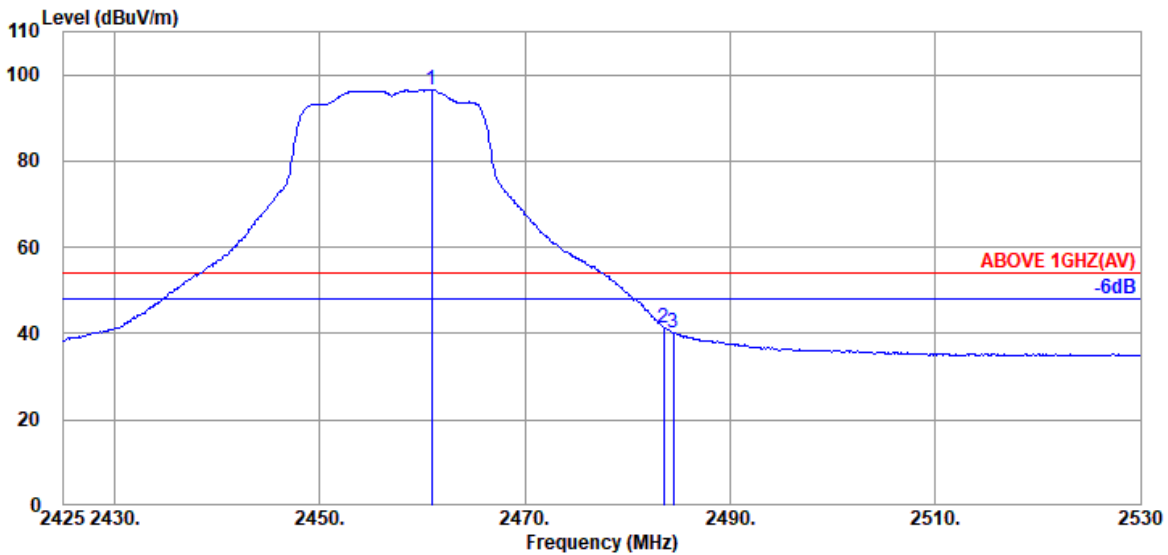


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.910	28.43	5.84	39.92	102.27	96.62	---	---	Average
	2483.485	28.47	5.87	39.92	47.05	41.47	54.00	12.53	Average
	2484.430	28.47	5.87	39.92	45.80	40.22	54.00	13.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

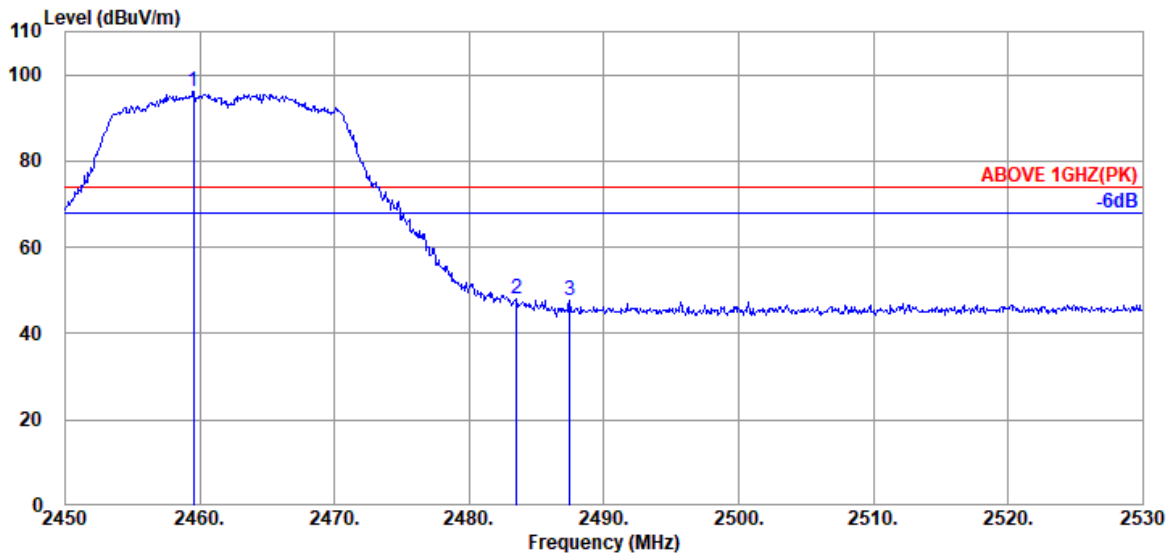

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.520	28.41	5.83	39.92	101.83	96.15	---	---	Peak
	2483.520	28.47	5.87	39.92	53.66	48.08	74.00	25.92	Peak
	2487.440	28.47	5.87	39.92	53.13	47.55	74.00	26.45	Peak

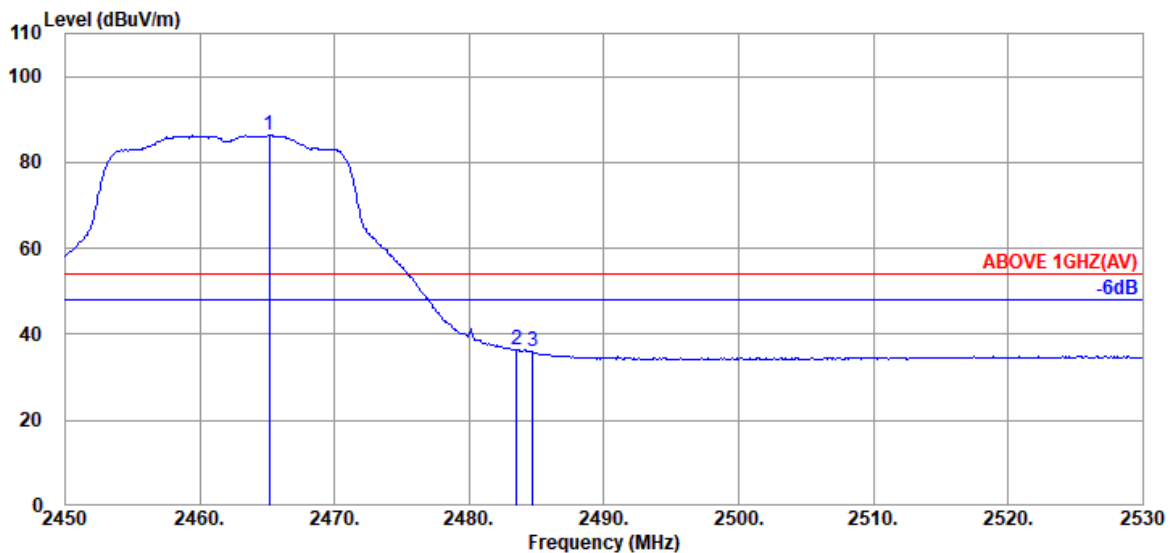


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.120	28.43	5.84	39.92	92.03	86.38	---	---	Average
	2483.520	28.47	5.87	39.92	42.08	36.50	54.00	17.50	Average
	2484.720	28.47	5.87	39.92	41.68	36.10	54.00	17.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

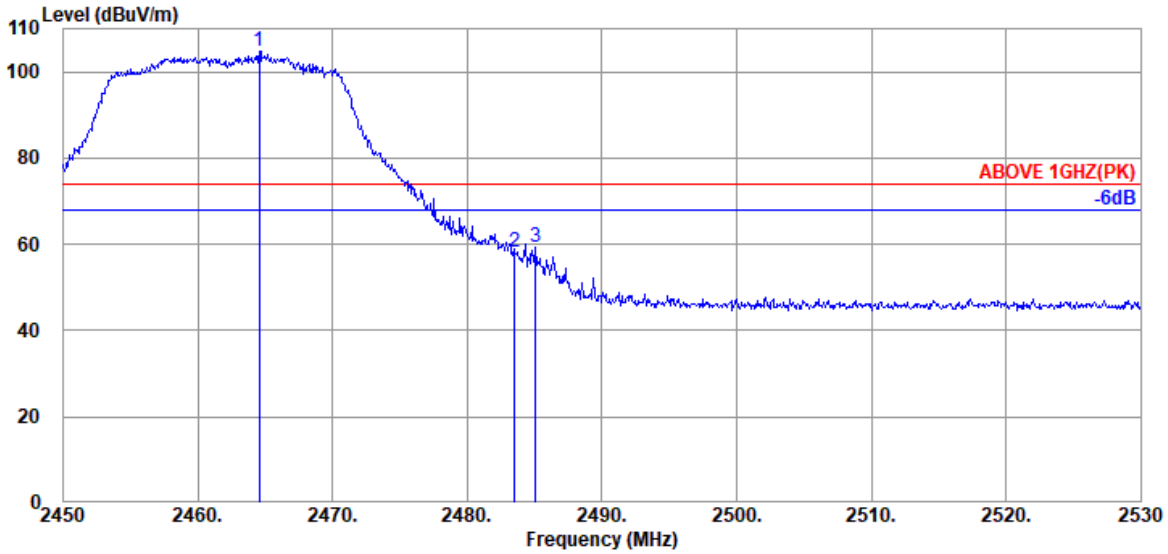

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.560	28.43	5.84	39.92	110.54	104.89	---	---	Peak
	2483.520	28.47	5.87	39.92	63.65	58.07	74.00	15.93	Peak
	2485.040	28.47	5.87	39.92	64.82	59.24	74.00	14.76	Peak

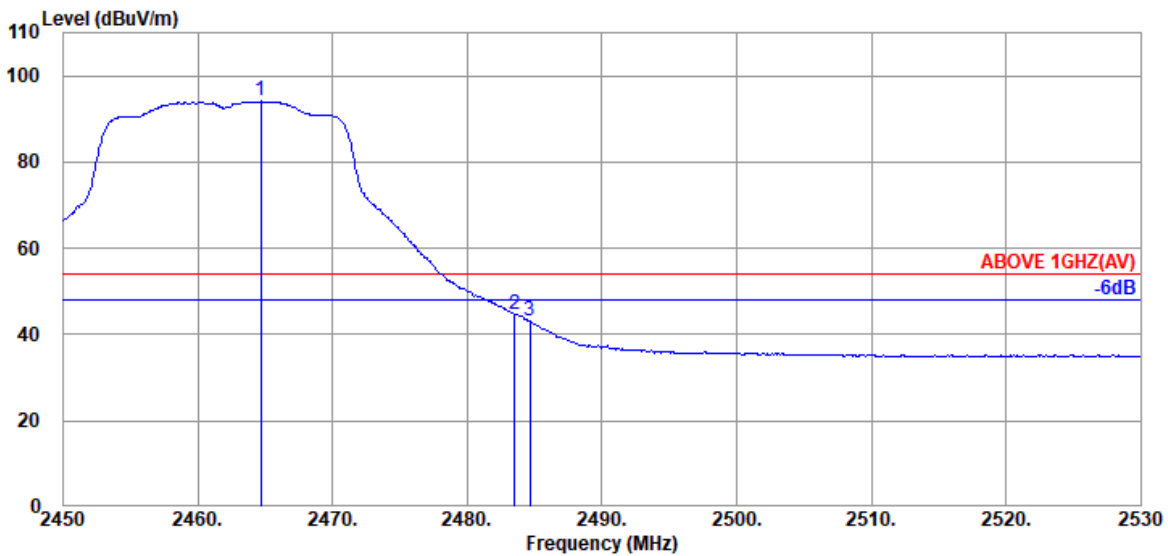


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.640	28.43	5.84	39.92	99.70	94.05	---	---	Average
	2483.520	28.47	5.87	39.92	50.39	44.81	54.00	9.19	Average
	2484.640	28.47	5.87	39.92	48.64	43.06	54.00	10.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

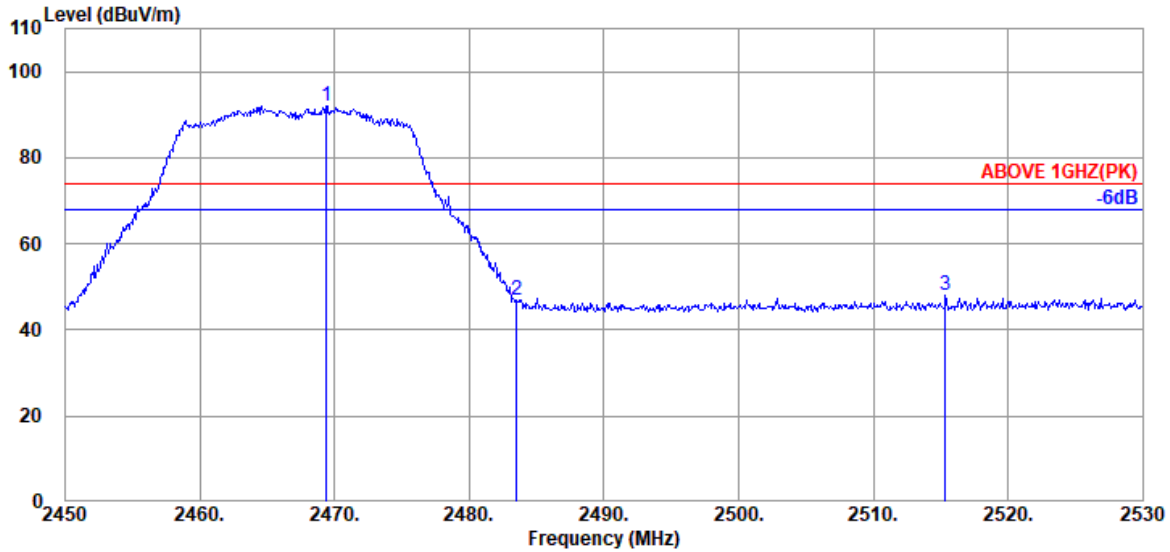

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.360	28.44	5.85	39.92	97.66	92.03	---	---	Peak
	2483.520	28.47	5.87	39.92	52.33	46.75	74.00	27.25	Peak
	2515.360	28.59	5.93	39.92	53.43	48.03	74.00	25.97	Peak

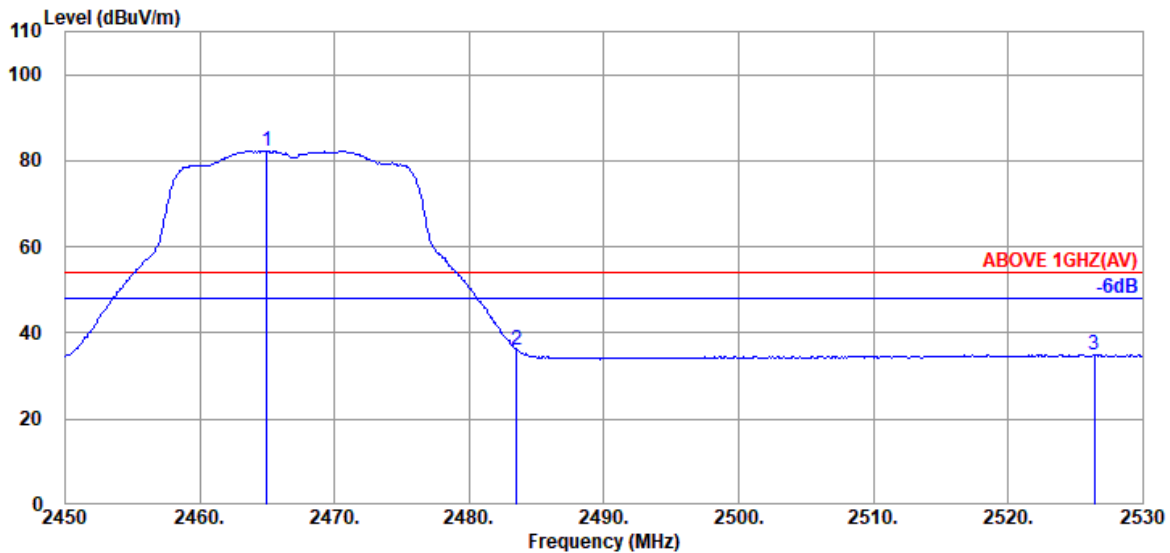


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.960	28.43	5.84	39.92	87.91	82.26	---	---	Average
	2483.520	28.47	5.87	39.92	41.78	36.20	54.00	17.80	Average
	2526.400	28.67	5.96	39.93	40.26	34.96	54.00	19.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

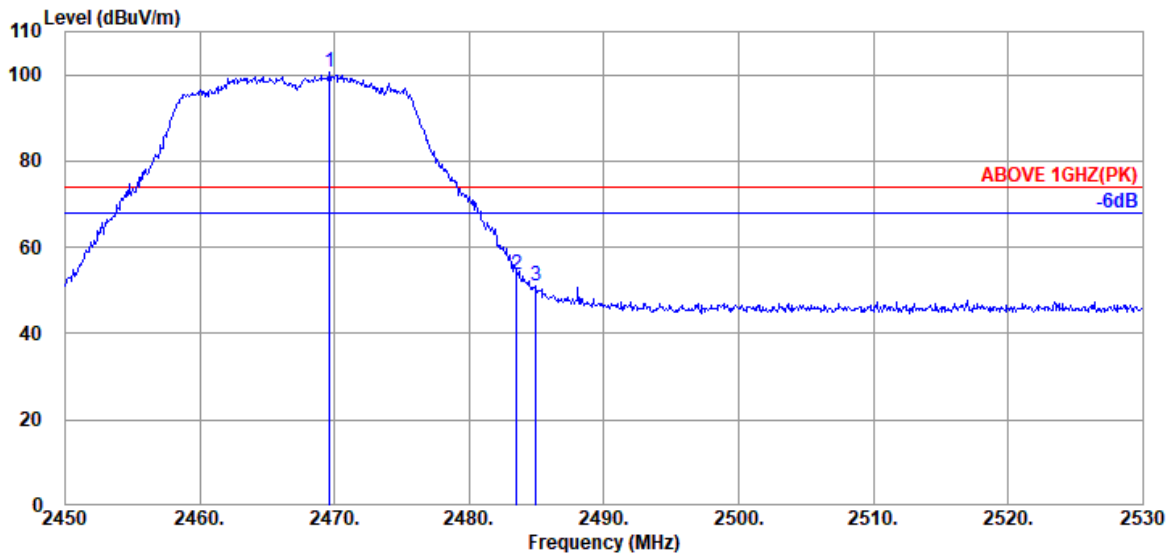

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.600	28.44	5.85	39.92	106.41	100.78	---	---	Peak
	2483.520	28.47	5.87	39.92	59.26	53.68	74.00	20.32	Peak
	2484.960	28.47	5.87	39.92	56.69	51.11	74.00	22.89	Peak

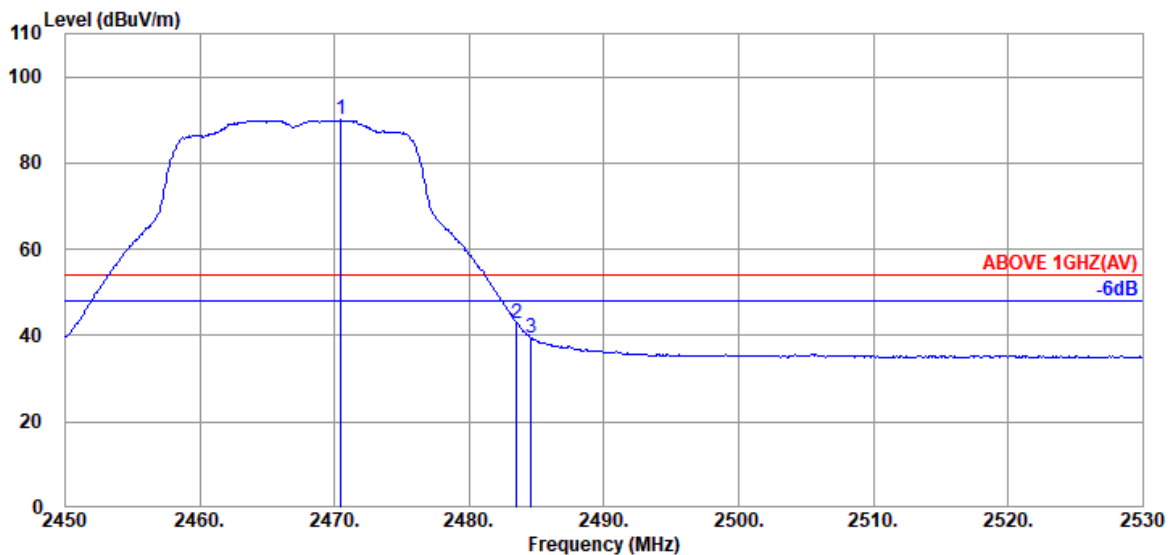


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.480	28.44	5.85	39.92	95.74	90.11	---	---	Average
	2483.520	28.47	5.87	39.92	48.33	42.75	54.00	11.25	Average
	2484.560	28.47	5.87	39.92	45.12	39.54	54.00	14.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

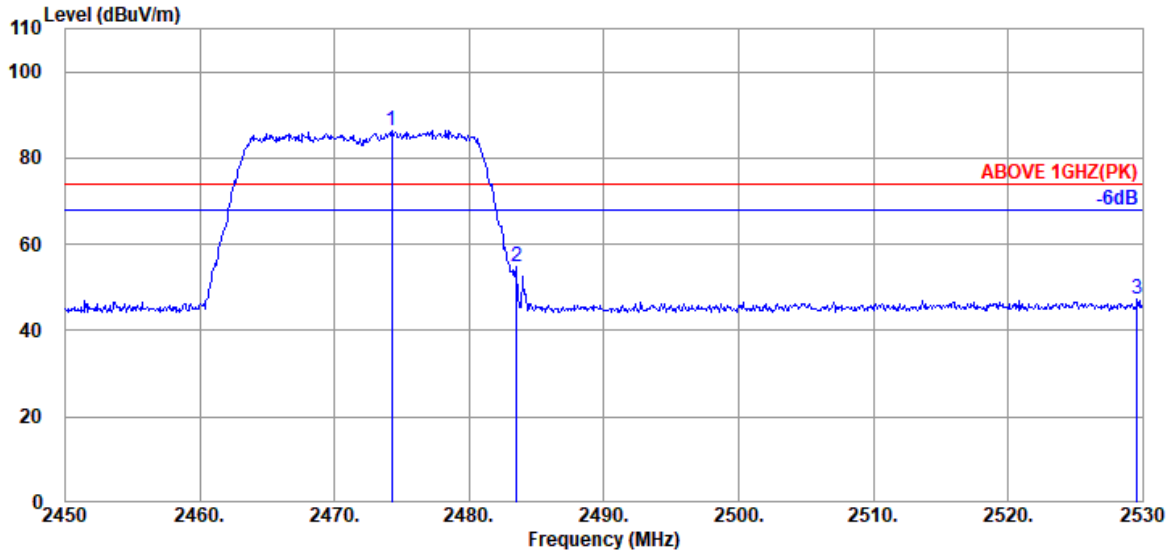

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.240	28.44	5.85	39.92	91.92	86.29	---	---	Peak
	2483.520	28.47	5.87	39.92	60.57	54.99	74.00	19.01	Peak
	2529.600	28.67	5.96	39.93	52.72	47.42	74.00	26.58	Peak

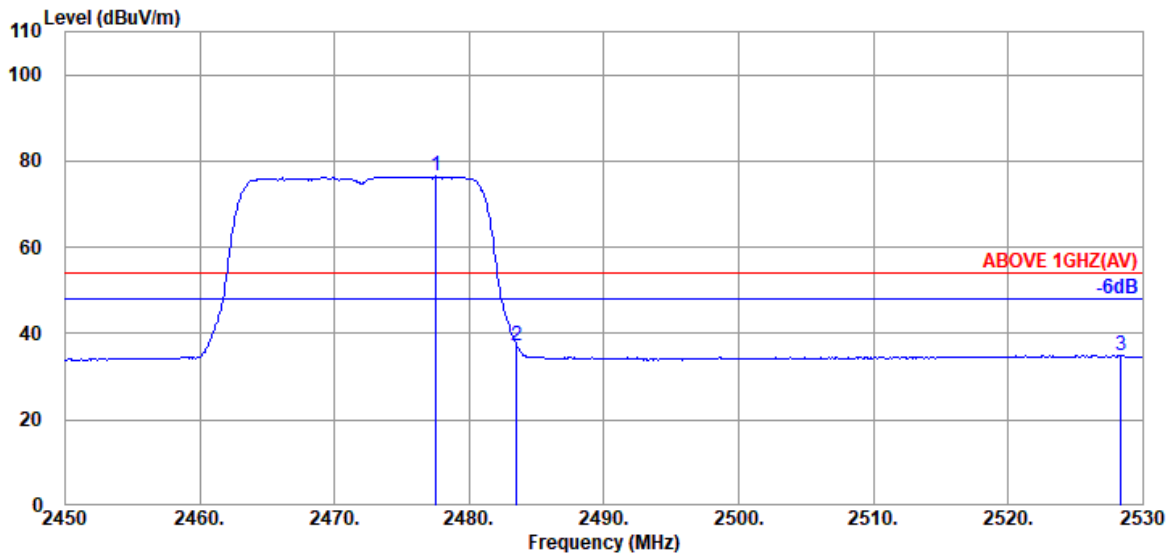


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2477.520	28.46	5.86	39.92	82.01	76.41	---	---	Average
	2483.520	28.47	5.87	39.92	42.83	37.25	54.00	16.75	Average
	2528.400	28.67	5.96	39.93	40.35	35.05	54.00	18.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

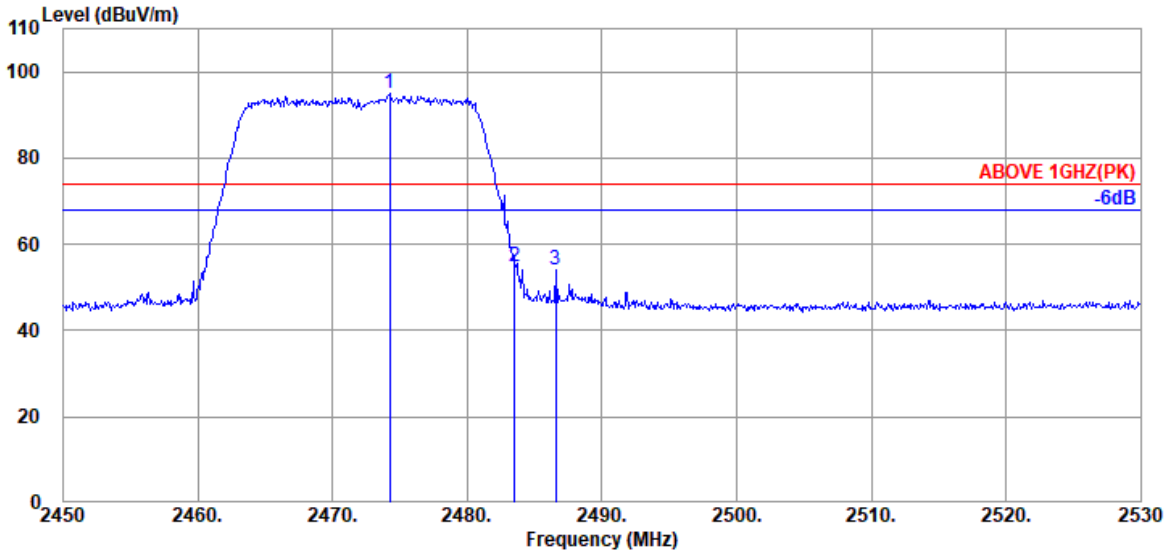

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.240	28.44	5.85	39.92	100.55	94.92	---	---	Peak
	2483.520	28.47	5.87	39.92	60.46	54.88	74.00	19.12	Peak
	2486.560	28.47	5.87	39.92	59.73	54.15	74.00	19.85	Peak

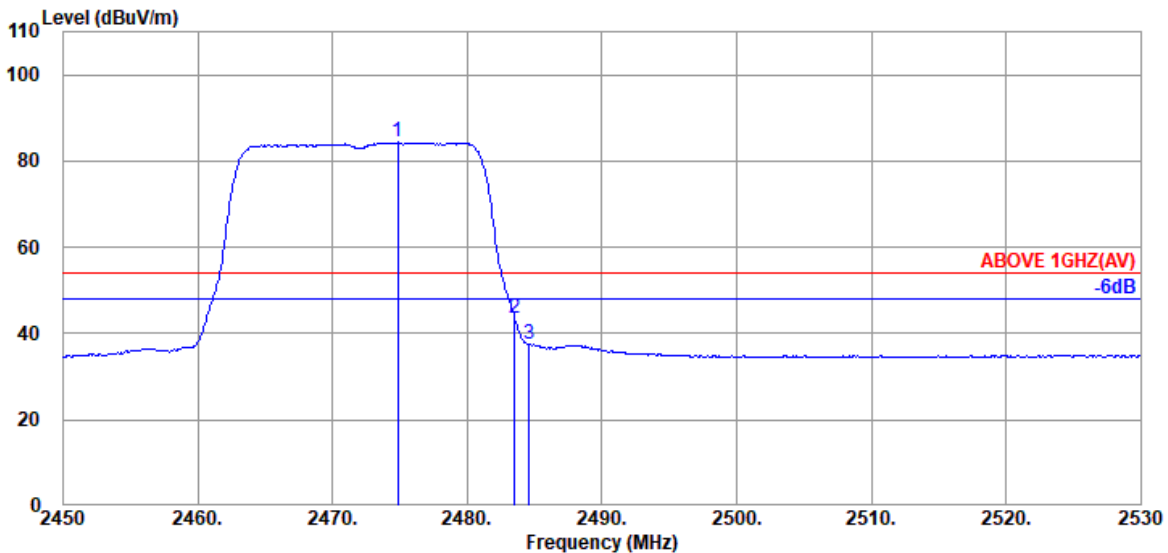


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.800	28.46	5.86	39.92	89.92	84.32	---	---	Average
	2483.520	28.47	5.87	39.92	48.98	43.40	54.00	10.60	Average
	2484.560	28.47	5.87	39.92	43.08	37.50	54.00	16.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

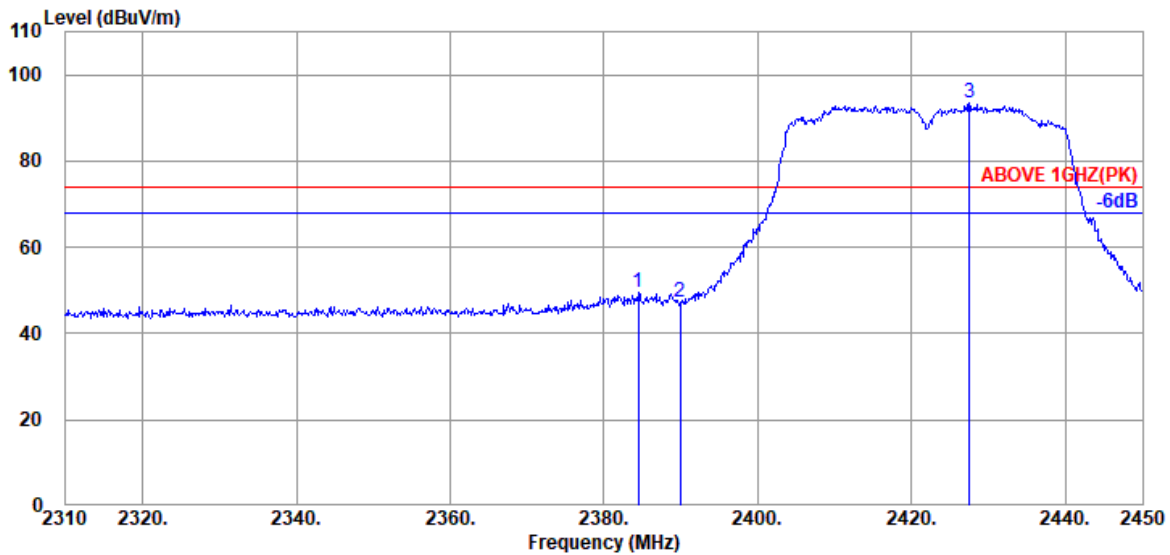

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2384.480	28.21	5.72	39.93	55.56	49.56	74.00	24.44	Peak
2389.940	28.21	5.72	39.93	53.43	47.43	74.00	26.57	Peak
@ 2427.460	28.27	5.78	39.93	99.20	93.32	---	---	Peak

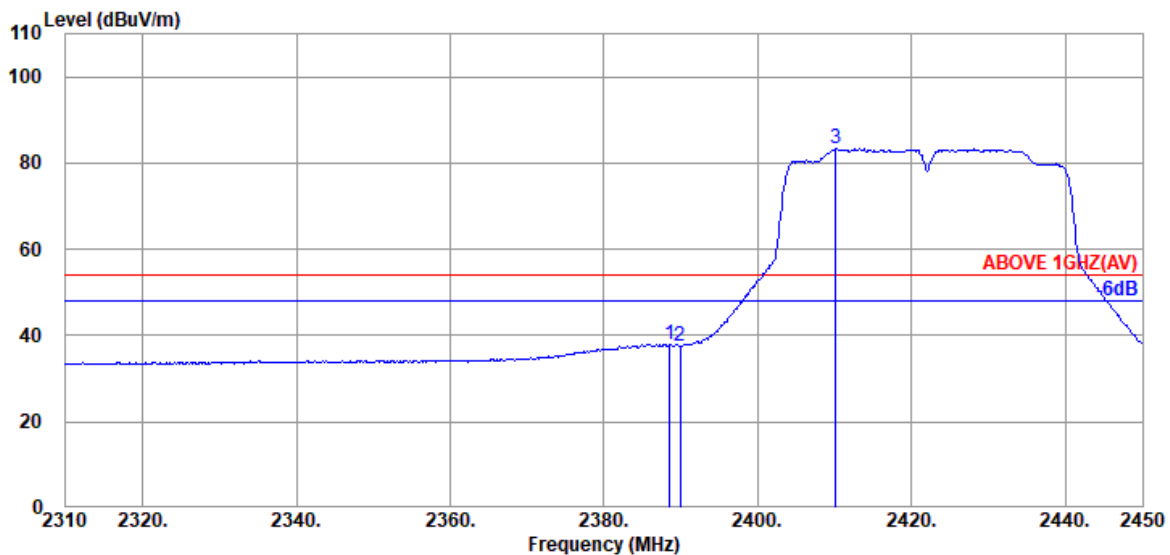


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.540	28.21	5.72	39.93	44.00	38.00	54.00	16.00	Average
2389.940	28.21	5.72	39.93	43.67	37.67	54.00	16.33	Average
@ 2410.100	28.14	5.75	39.93	89.40	83.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

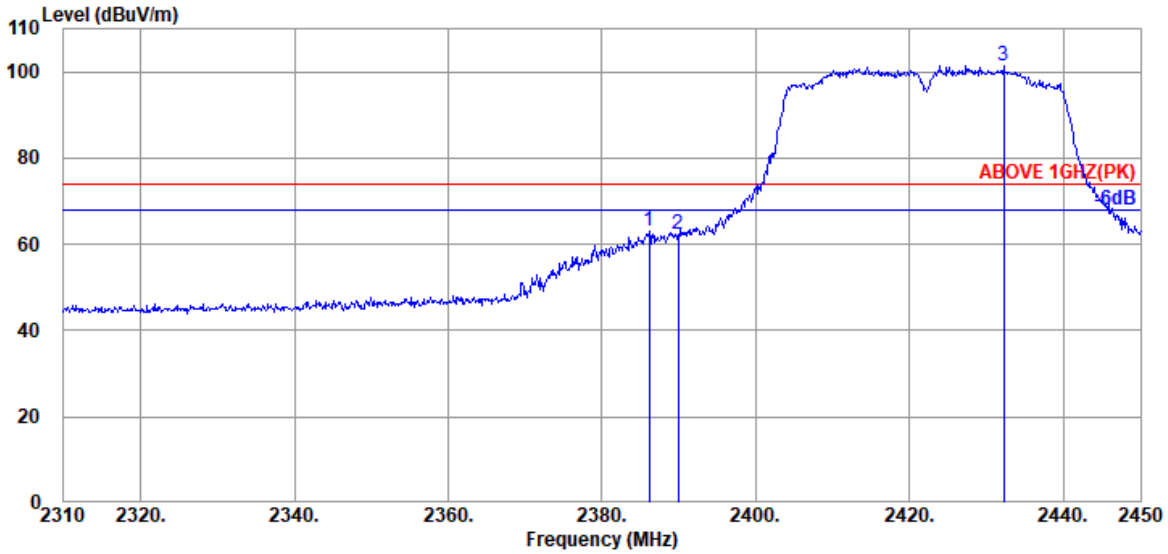

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.160	28.21	5.72	39.93	68.99	62.99	74.00	11.01	Peak
2389.940	28.21	5.72	39.93	68.40	62.40	74.00	11.60	Peak
@ 2432.220	28.31	5.79	39.93	107.29	101.46	---	---	Peak

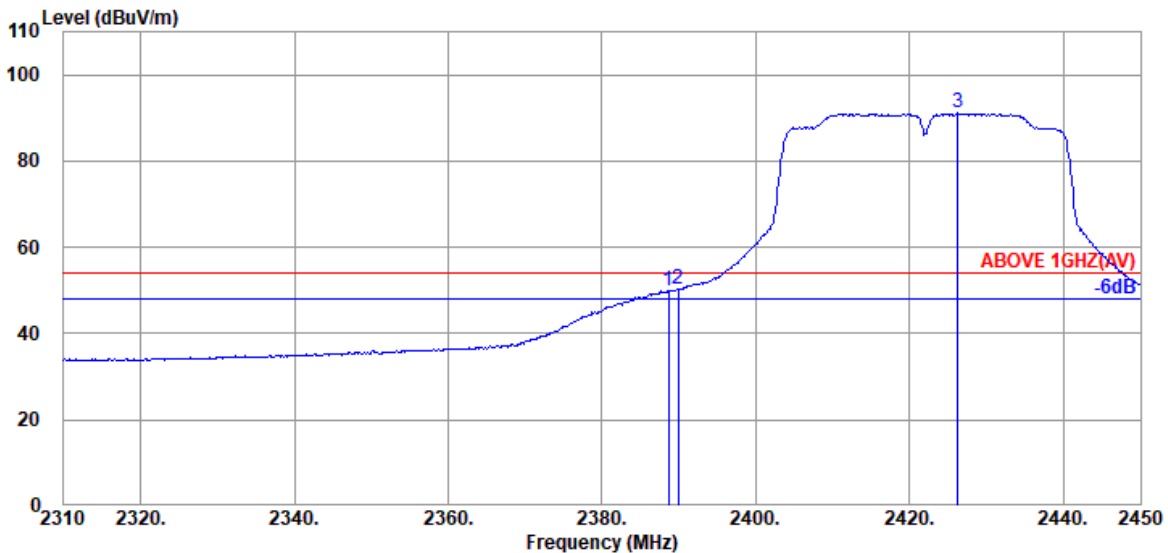


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.680	28.21	5.72	39.93	56.12	50.12	54.00	3.88	Average
2389.940	28.21	5.72	39.93	56.33	50.33	54.00	3.67	Average
@ 2426.200	28.27	5.78	39.93	96.93	91.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

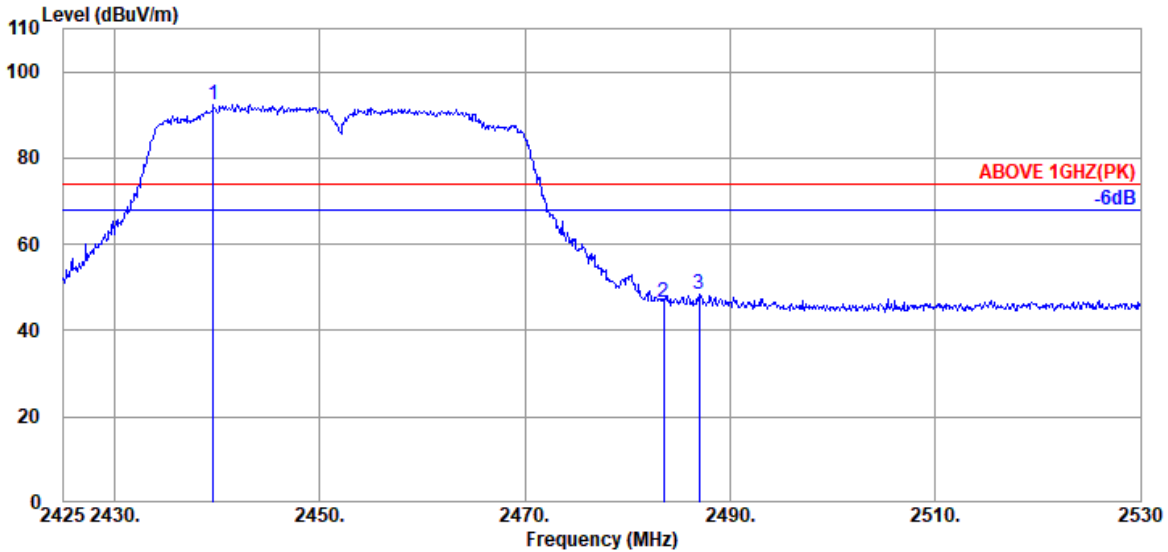

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2439.595	28.36	5.80	39.93	98.10	92.33	---	---	Peak
	2483.485	28.47	5.87	39.92	52.22	46.64	74.00	27.36	Peak
	2486.950	28.47	5.87	39.92	54.19	48.61	74.00	25.39	Peak

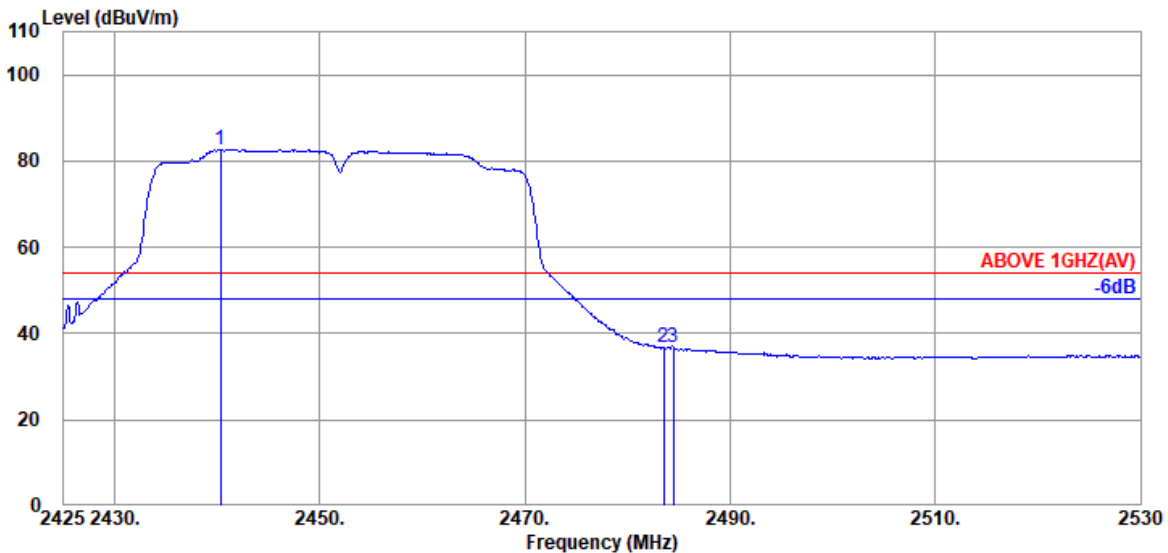


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.330	28.36	5.80	39.93	88.46	82.69	---	---	Average
	2483.485	28.47	5.87	39.92	42.25	36.67	54.00	17.33	Average
	2484.430	28.47	5.87	39.92	42.39	36.81	54.00	17.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

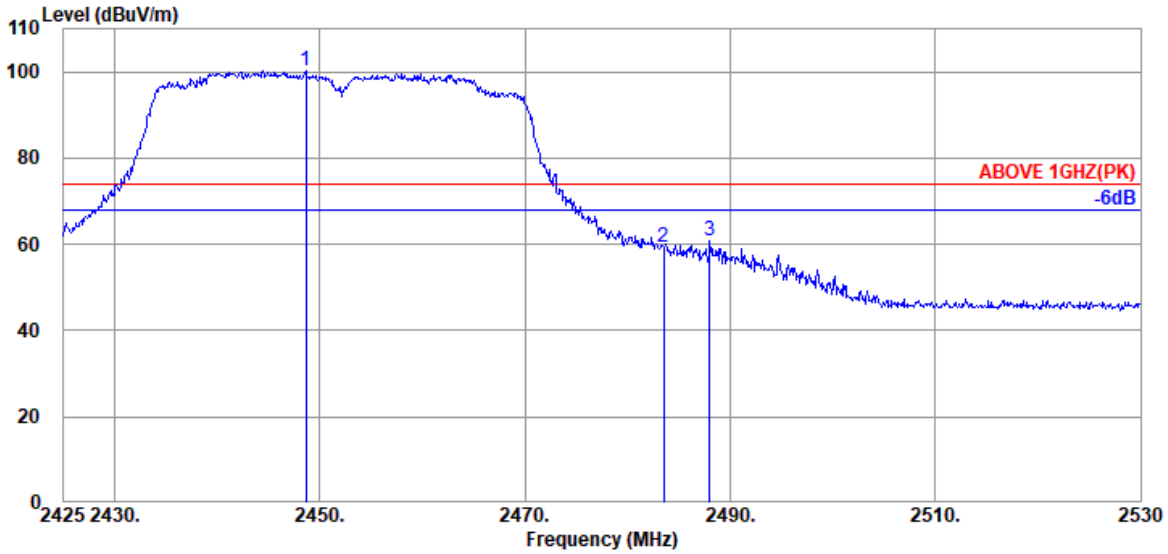

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.625	28.40	5.81	39.93	106.09	100.37	---	---	Peak
2483.485	28.47	5.87	39.92	64.94	59.36	74.00	14.64	Peak
2488.000	28.47	5.87	39.92	66.26	60.68	74.00	13.32	Peak

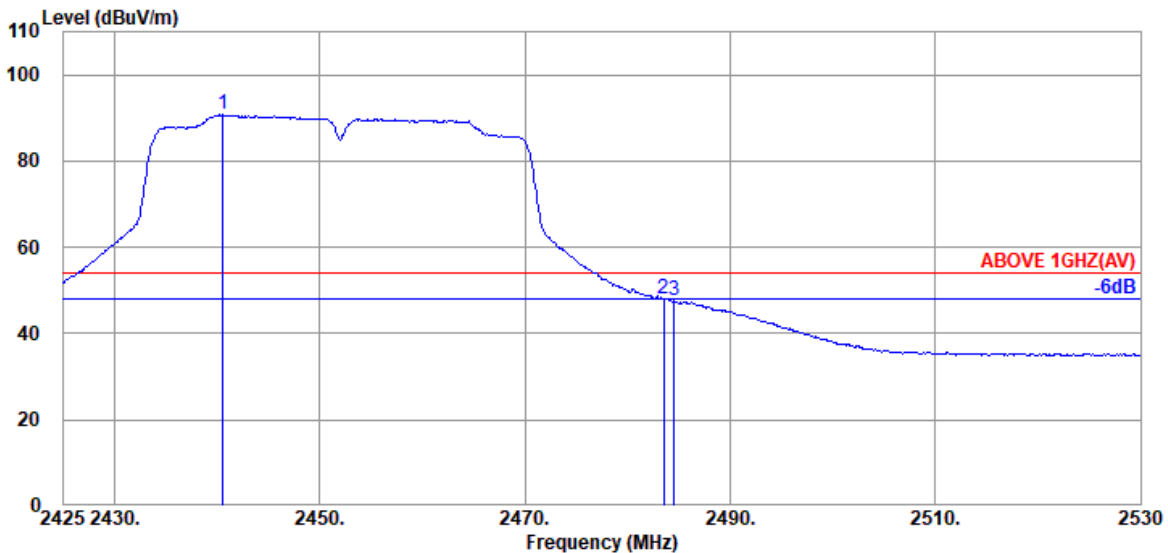


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.540	28.36	5.80	39.93	96.48	90.71	---	---	Average
2483.485	28.47	5.87	39.92	53.59	48.01	54.00	5.99	Average
2484.535	28.47	5.87	39.92	53.09	47.51	54.00	6.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

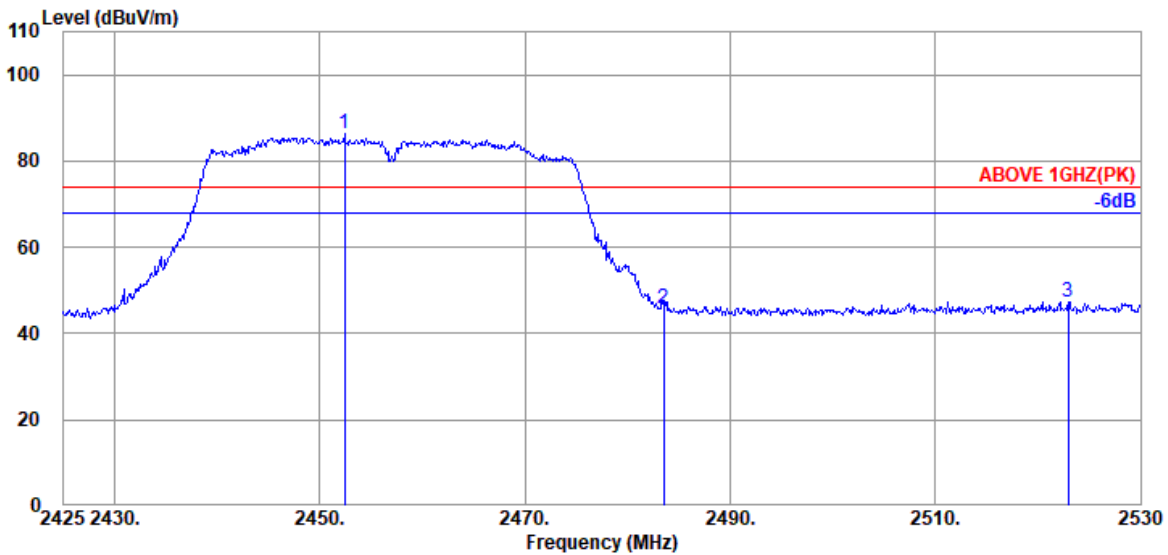

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.405	28.40	5.81	39.92	92.02	86.31	---	---	Peak
	2483.485	28.47	5.87	39.92	51.22	45.64	74.00	28.36	Peak
	2522.965	28.63	5.94	39.93	52.66	47.30	74.00	26.70	Peak

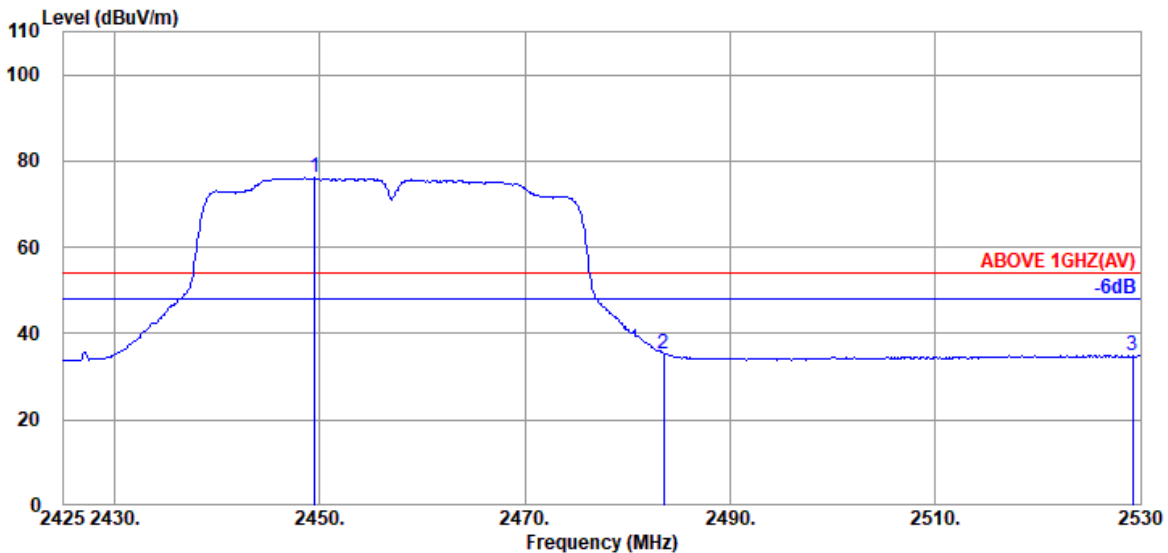


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2449.465	28.40	5.81	39.93	81.83	76.11	---	---	Average
	2483.485	28.47	5.87	39.92	41.03	35.45	54.00	18.55	Average
	2529.265	28.67	5.96	39.93	40.15	34.85	54.00	19.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

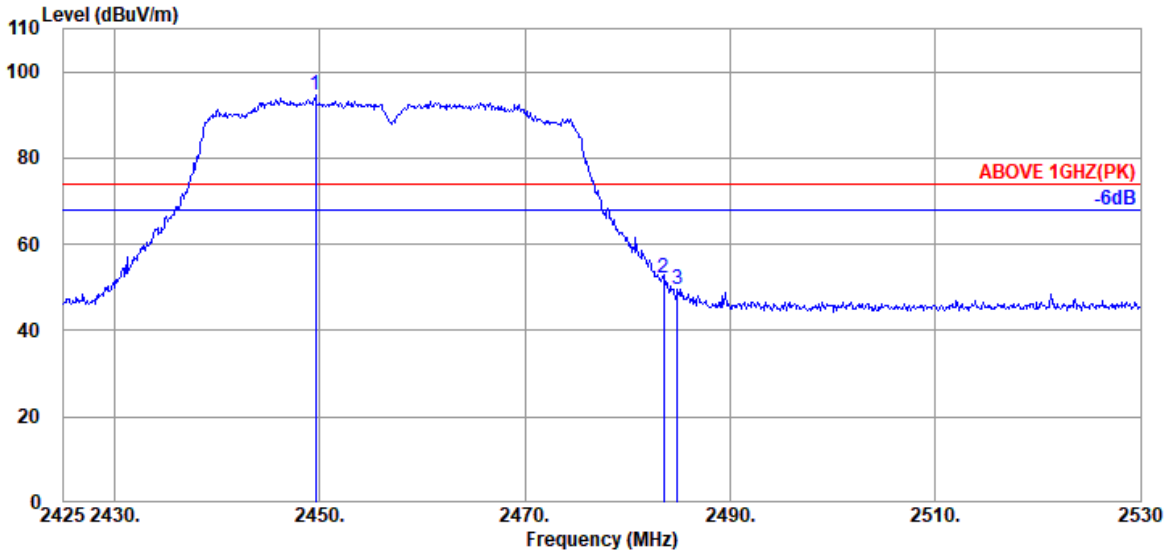

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2449.570	28.40	5.81	39.93	100.36	94.64	---	---	Peak
	2483.485	28.47	5.87	39.92	57.80	52.22	74.00	21.78	Peak
	2484.850	28.47	5.87	39.92	55.32	49.74	74.00	24.26	Peak

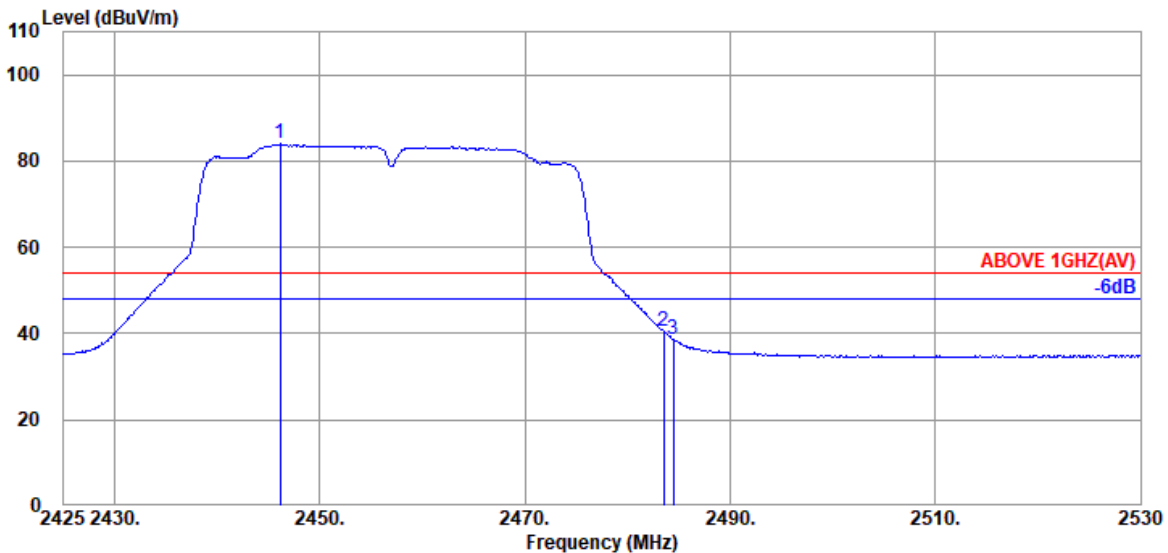


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2446.105	28.36	5.80	39.93	89.70	83.93	---	---	Average
	2483.485	28.47	5.87	39.92	46.03	40.45	54.00	13.55	Average
	2484.430	28.47	5.87	39.92	44.23	38.65	54.00	15.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

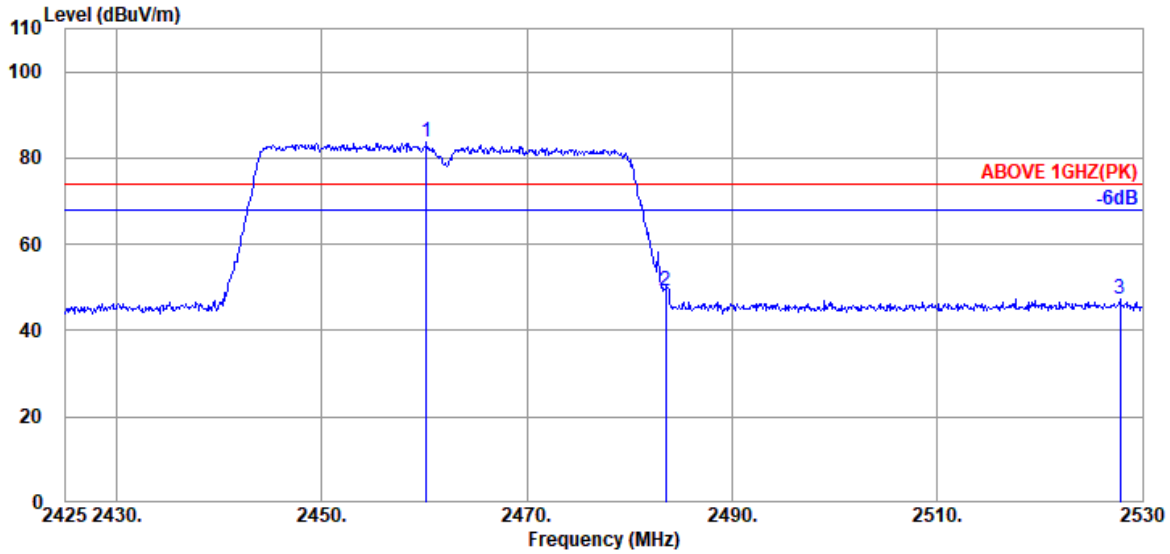

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.175	28.41	5.83	39.92	89.28	83.60	---	---	Peak
	2483.485	28.47	5.87	39.92	54.60	49.02	74.00	24.98	Peak
	2527.795	28.67	5.96	39.93	52.51	47.21	74.00	26.79	Peak

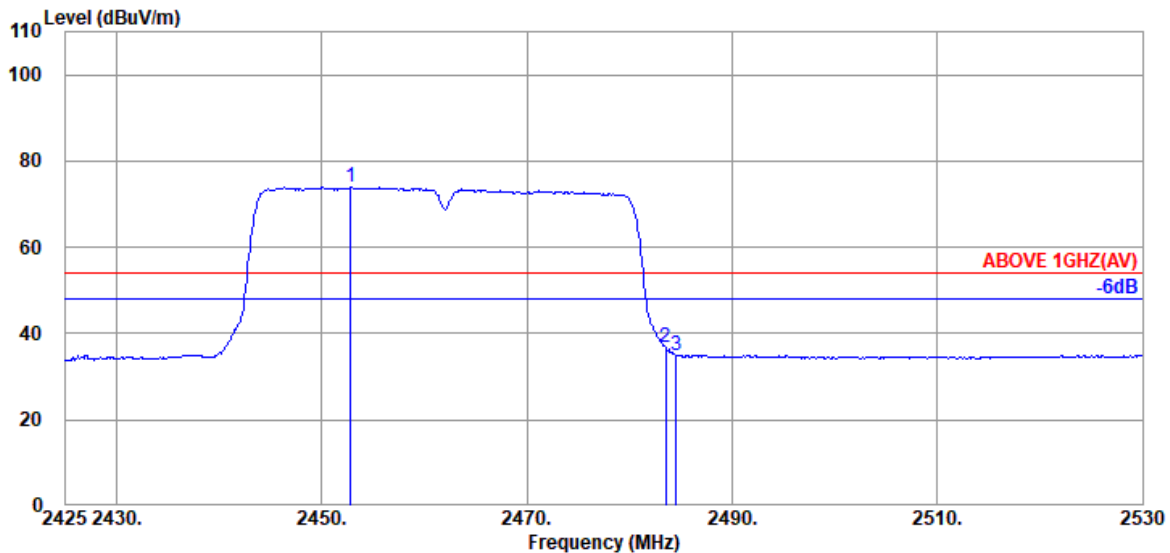


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.825	28.40	5.81	39.92	79.76	74.05	---	---	Average
	2483.485	28.47	5.87	39.92	42.53	36.95	54.00	17.05	Average
	2484.535	28.47	5.87	39.92	40.64	35.06	54.00	18.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

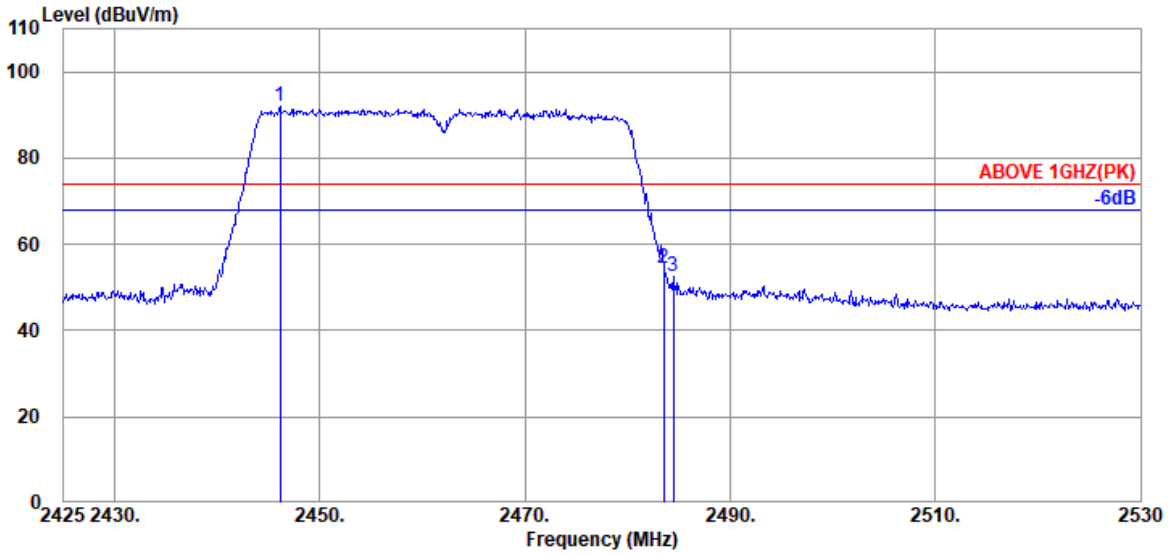

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2446.105	28.36	5.80	39.93	97.91	92.14	---	---	Peak
	2483.485	28.47	5.87	39.92	59.97	54.39	74.00	19.61	Peak
	2484.430	28.47	5.87	39.92	58.06	52.48	74.00	21.52	Peak

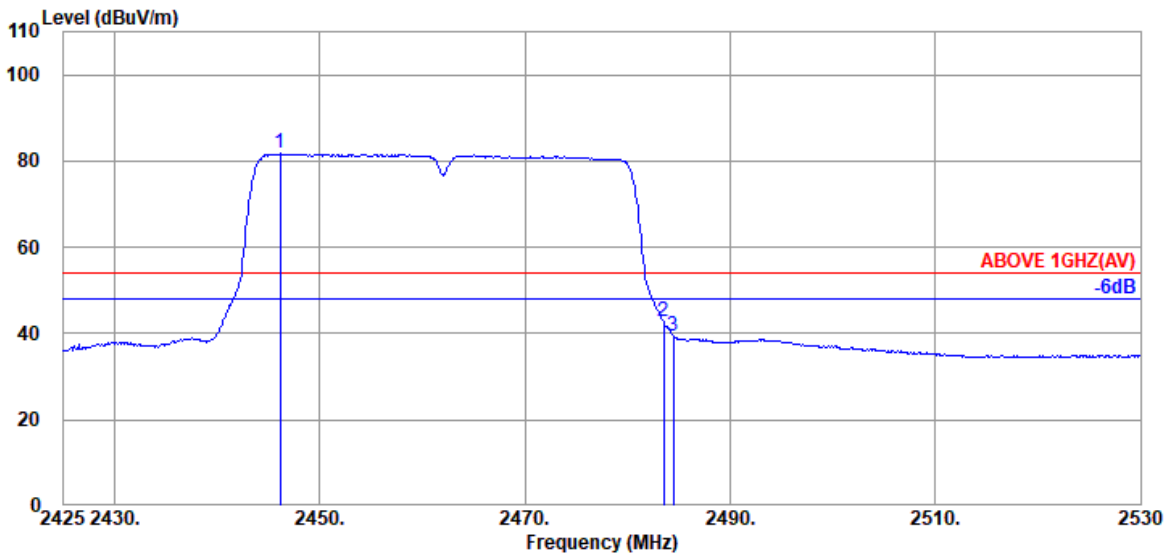


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2446.105	28.36	5.80	39.93	87.48	81.71	---	---	Average
	2483.485	28.47	5.87	39.92	48.38	42.80	54.00	11.20	Average
	2484.430	28.47	5.87	39.92	45.18	39.60	54.00	14.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

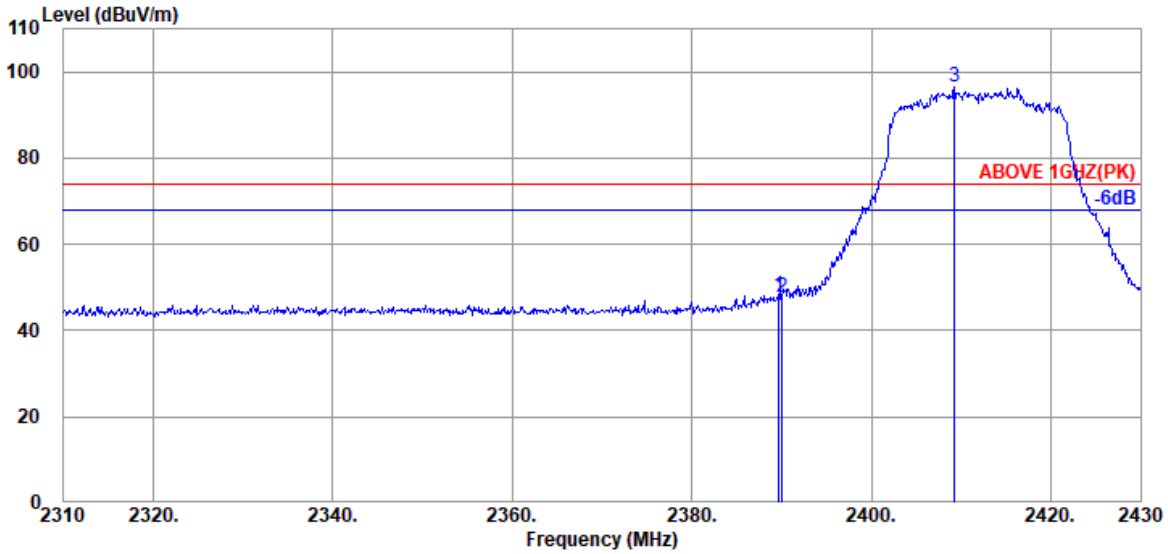

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	54.13	48.13	74.00	25.87	Peak
2390.040	28.21	5.72	39.93	53.62	47.62	74.00	26.38	Peak
@ 2409.240	28.14	5.75	39.93	102.60	96.56	---	---	Peak

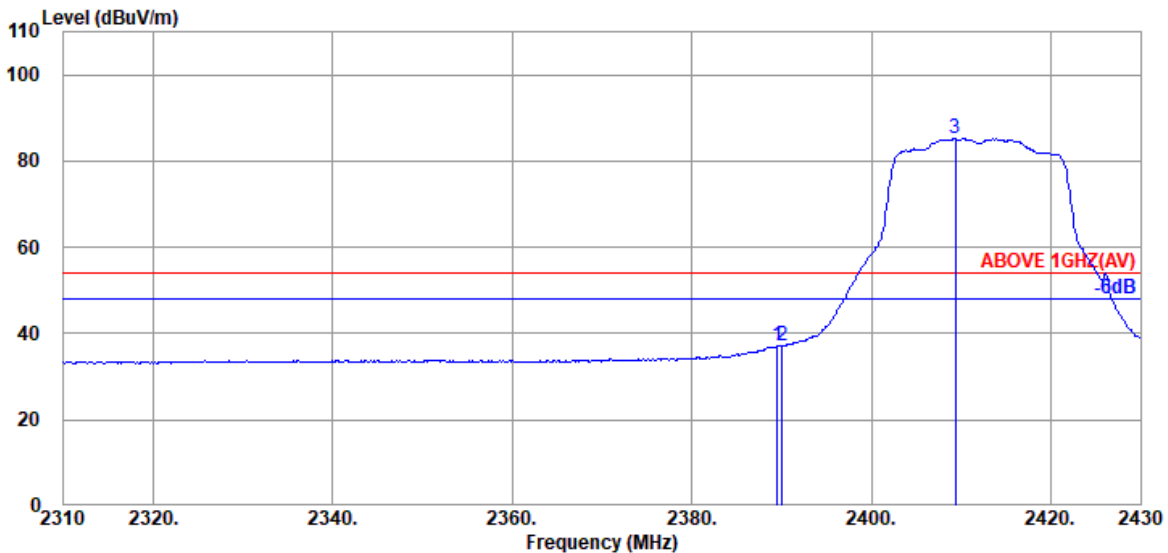


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	43.15	37.15	54.00	16.85	Average
2390.040	28.21	5.72	39.93	43.03	37.03	54.00	16.97	Average
@ 2409.360	28.14	5.75	39.93	91.23	85.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

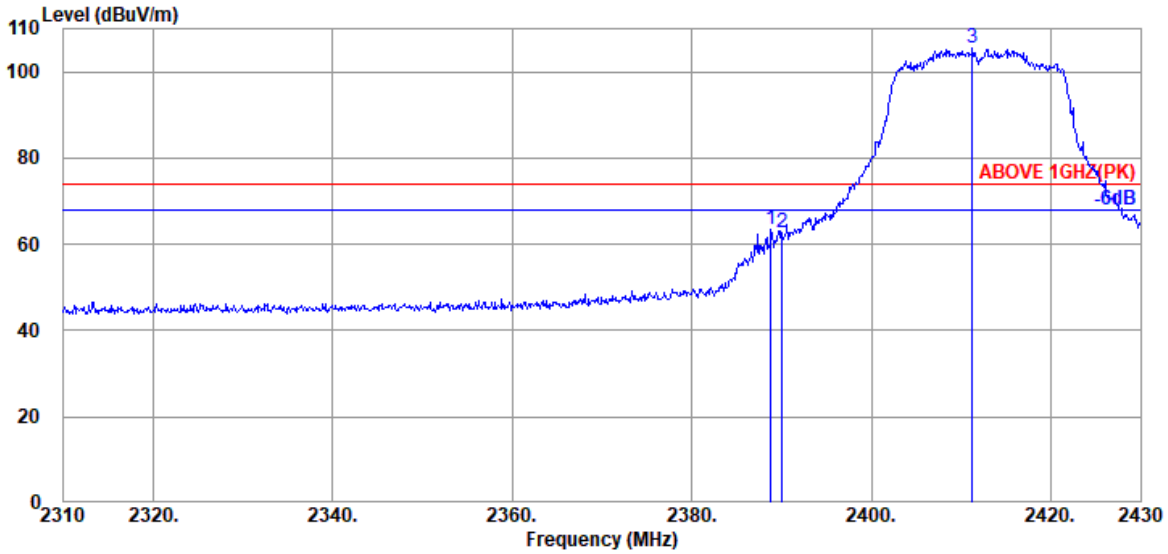

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.21	5.72	39.93	69.52	63.52	74.00	10.48	Peak
2390.040	28.21	5.72	39.93	68.80	62.80	74.00	11.20	Peak
@ 2411.280	28.19	5.76	39.93	111.51	105.53	---	---	Peak

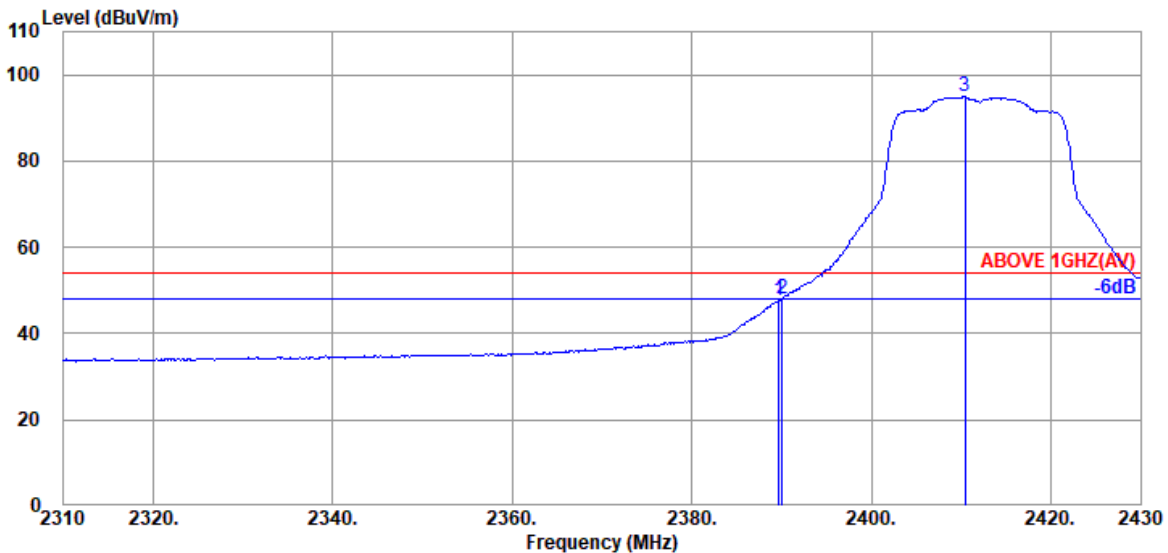


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	53.61	47.61	54.00	6.39	Average
2390.040	28.21	5.72	39.93	54.16	48.16	54.00	5.84	Average
@ 2410.440	28.14	5.75	39.93	100.92	94.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

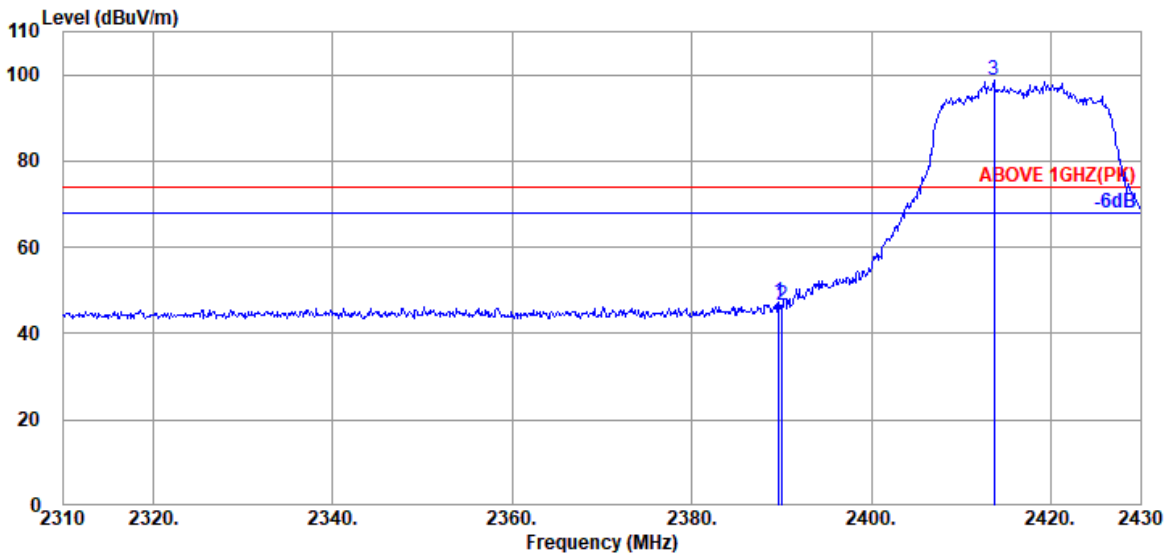

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	53.46	47.46	74.00	26.54	Peak
2390.040	28.21	5.72	39.93	52.43	46.43	74.00	27.57	Peak
@ 2413.680	28.19	5.76	39.93	104.65	98.67	---	---	Peak

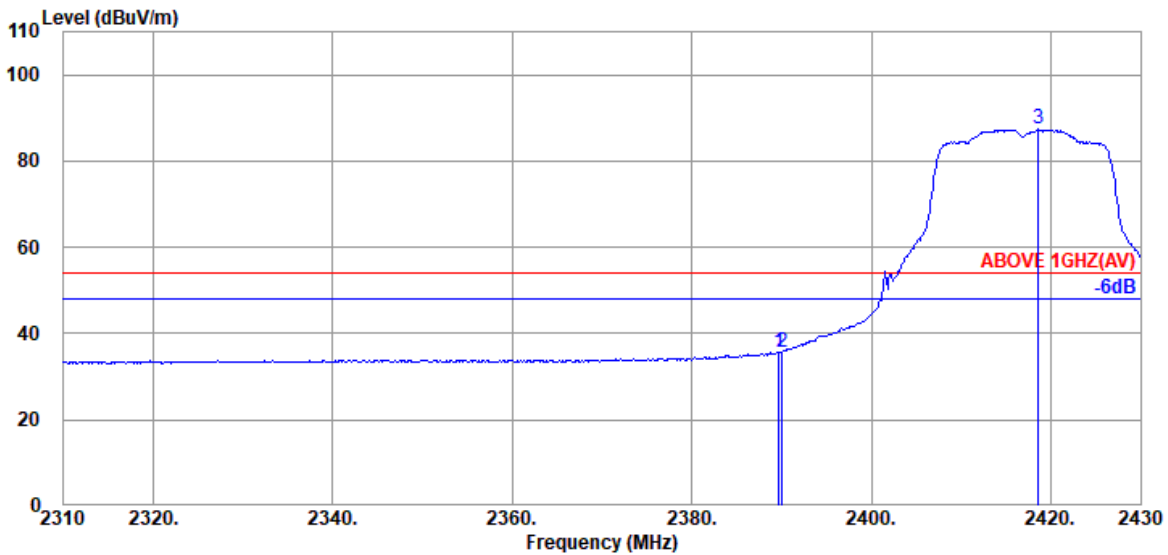


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	41.55	35.55	54.00	18.45	Average
2390.040	28.21	5.72	39.93	41.83	35.83	54.00	18.17	Average
@ 2418.600	28.23	5.77	39.93	93.24	87.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

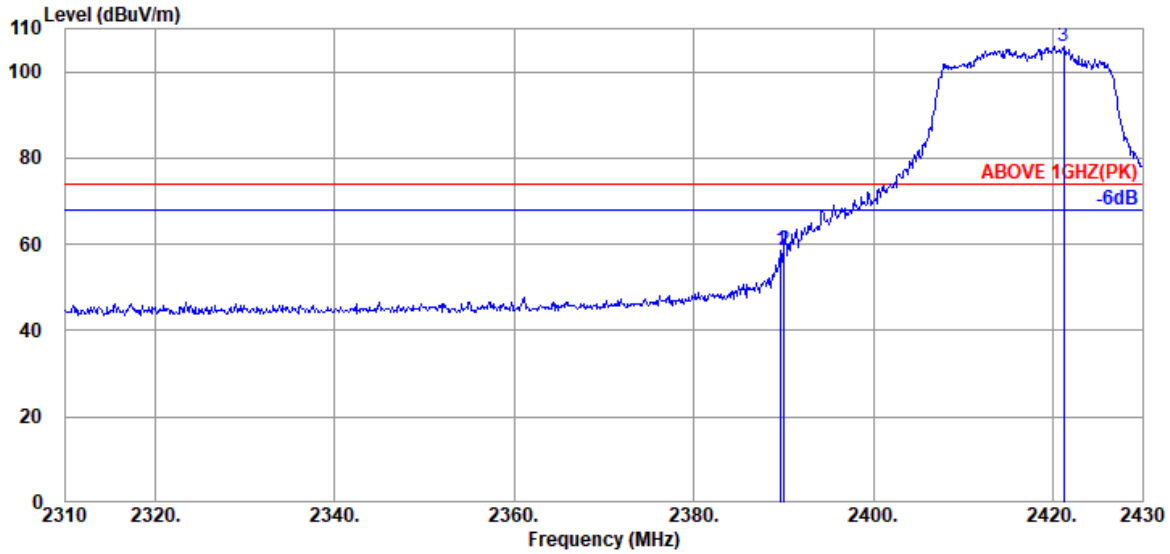

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	64.39	58.39	74.00	15.61	Peak
2390.040	28.21	5.72	39.93	64.68	58.68	74.00	15.32	Peak
@ 2421.240	28.23	5.77	39.93	111.80	105.87	---	---	Peak

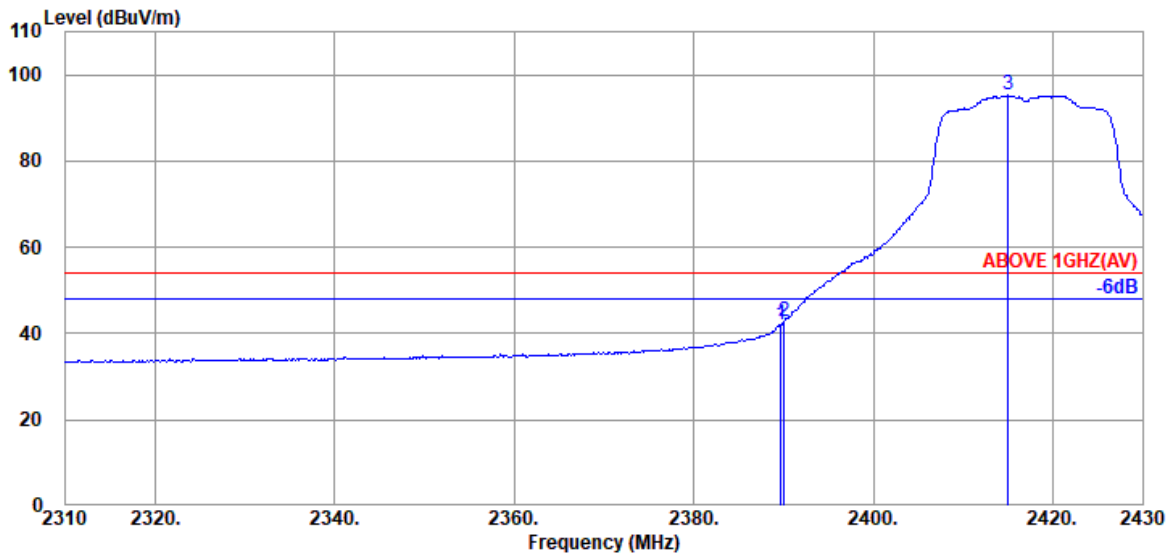


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	47.98	41.98	54.00	12.02	Average
2390.040	28.21	5.72	39.93	48.83	42.83	54.00	11.17	Average
@ 2415.000	28.19	5.76	39.93	101.22	95.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

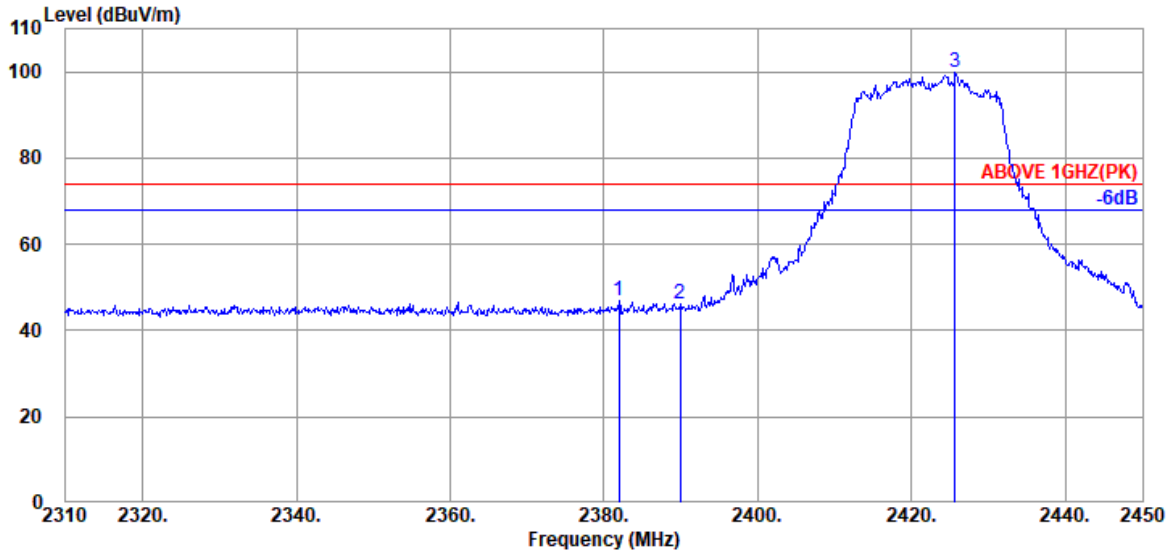

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.960	28.27	5.71	39.93	52.73	46.78	74.00	27.22	Peak
2389.940	28.21	5.72	39.93	52.22	46.22	74.00	27.78	Peak
@ 2425.640	28.27	5.78	39.93	105.80	99.92	---	---	Peak

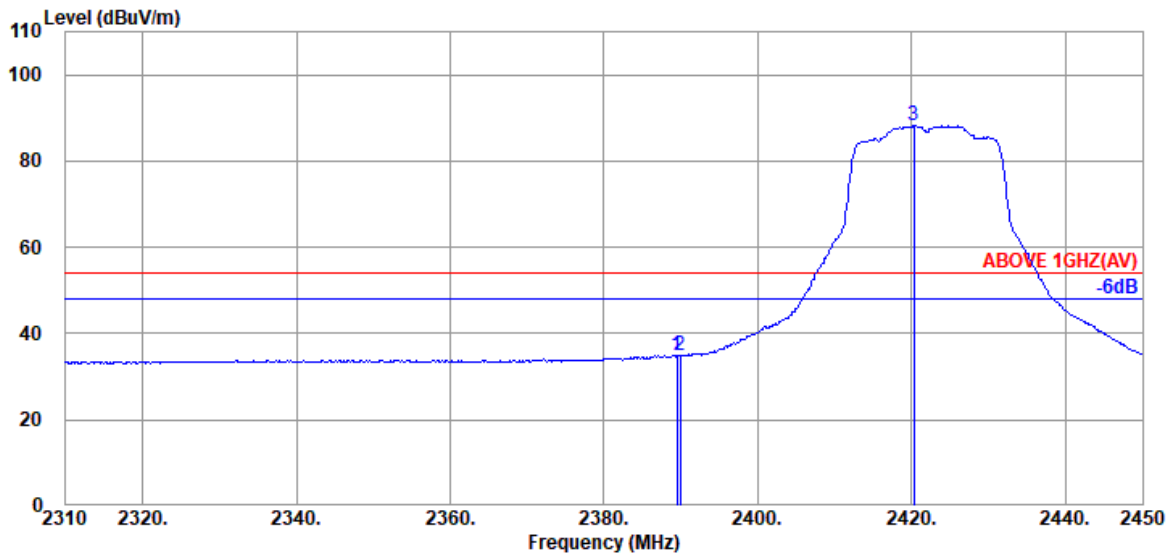


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.21	5.72	39.93	40.90	34.90	54.00	19.10	Average
2389.940	28.21	5.72	39.93	40.88	34.88	54.00	19.12	Average
@ 2420.320	28.23	5.77	39.93	94.13	88.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

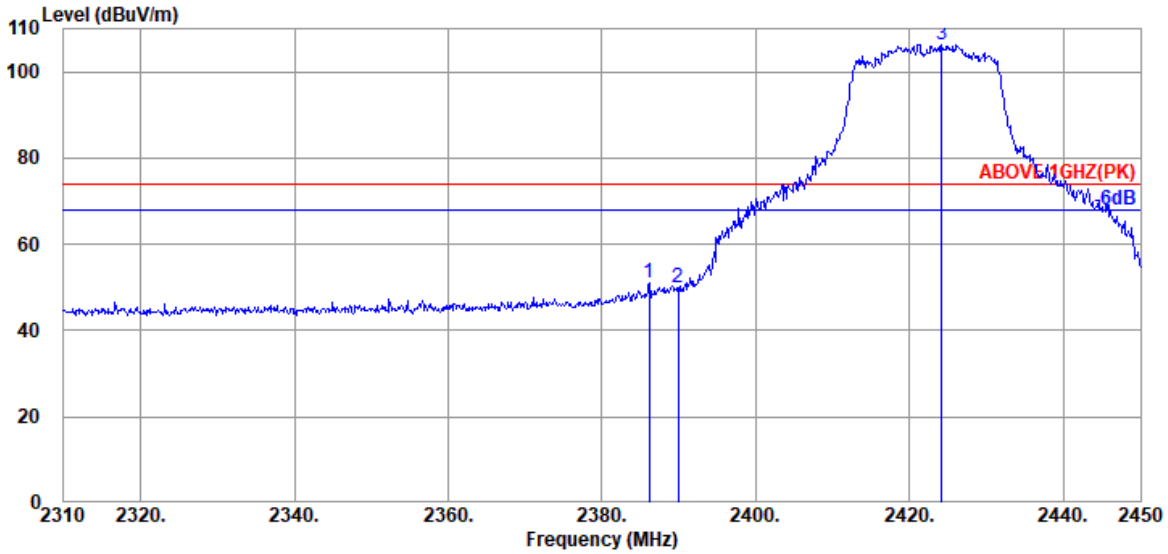

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.160	28.21	5.72	39.93	57.07	51.07	74.00	22.93	Peak
2389.940	28.21	5.72	39.93	55.87	49.87	74.00	24.13	Peak
@ 2424.100	28.23	5.77	39.93	112.14	106.21	---	---	Peak

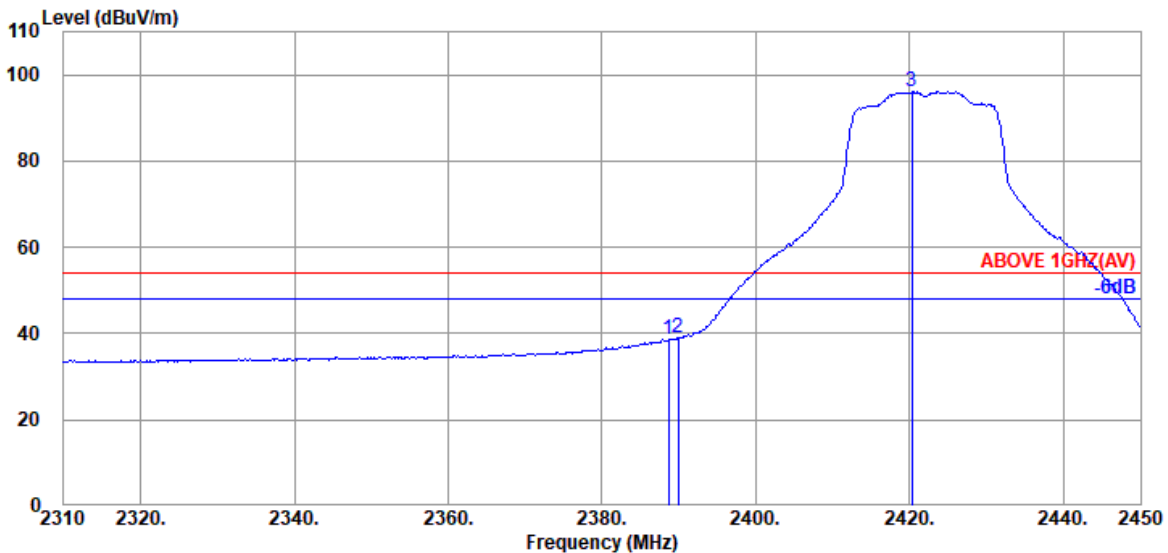


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.680	28.21	5.72	39.93	44.83	38.83	54.00	15.17	Average
2389.940	28.21	5.72	39.93	45.20	39.20	54.00	14.80	Average
@ 2420.320	28.23	5.77	39.93	102.10	96.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

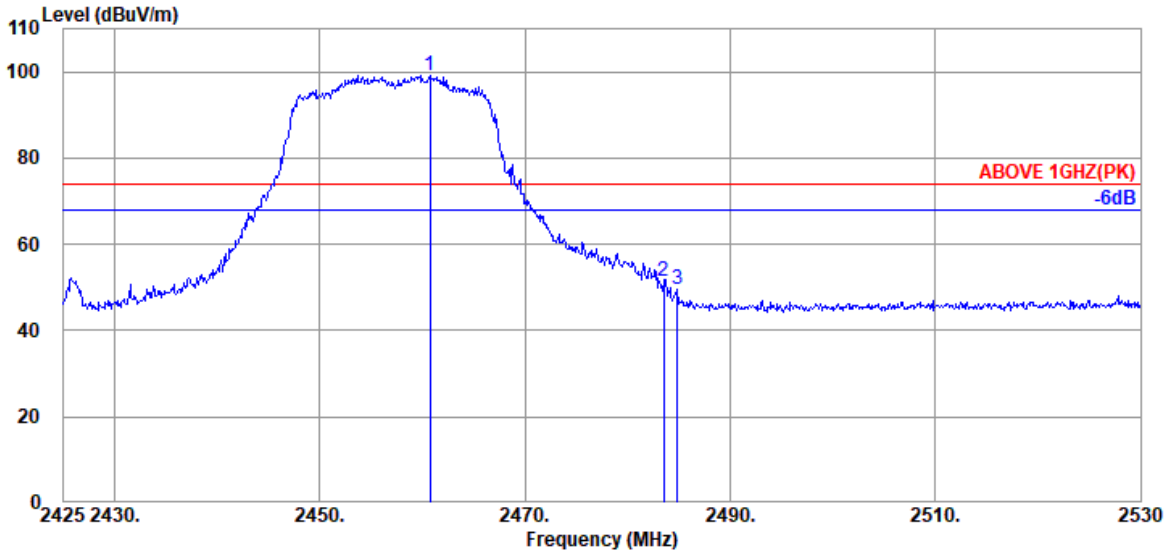

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.700	28.43	5.84	39.92	104.71	99.06	---	---	Peak
	2483.485	28.47	5.87	39.92	57.03	51.45	74.00	22.55	Peak
	2484.850	28.47	5.87	39.92	55.07	49.49	74.00	24.51	Peak

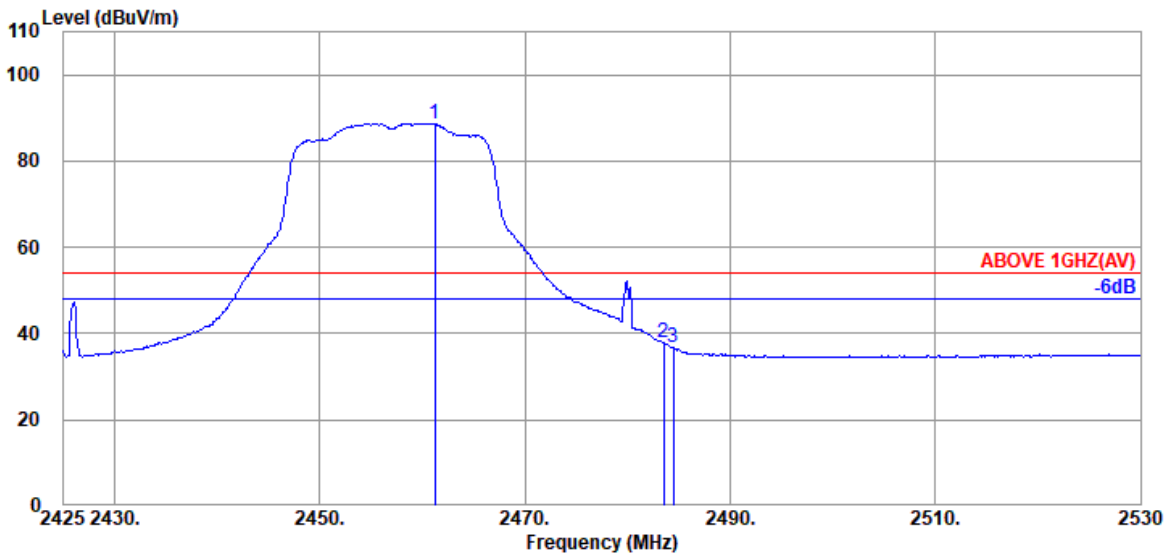


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.225	28.43	5.84	39.92	94.44	88.79	---	---	Average
	2483.485	28.47	5.87	39.92	43.33	37.75	54.00	16.25	Average
	2484.430	28.47	5.87	39.92	42.20	36.62	54.00	17.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

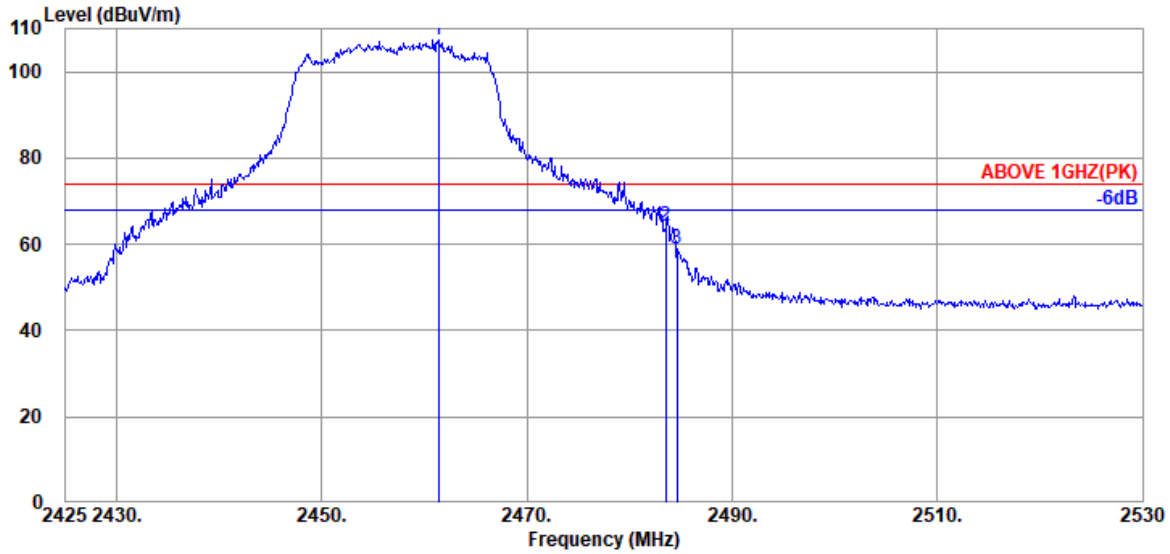

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.330	28.43	5.84	39.92	113.17	107.52	---	---	Peak
	2483.485	28.47	5.87	39.92	69.83	64.25	74.00	9.75	Peak
	2484.640	28.47	5.87	39.92	64.63	59.05	74.00	14.95	Peak

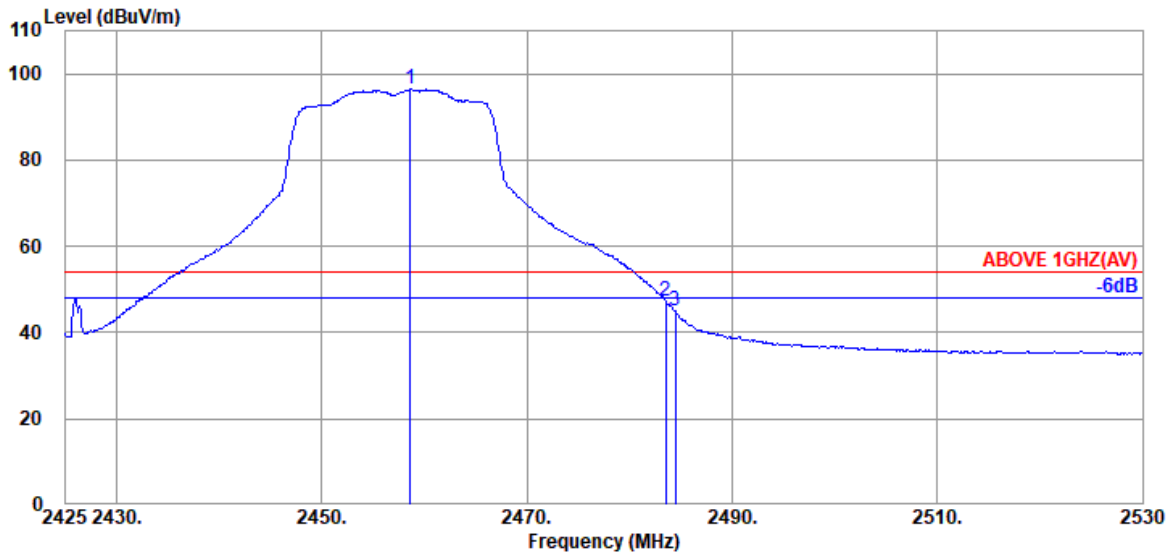


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.600	28.41	5.83	39.92	102.07	96.39	---	---	Average
	2483.485	28.47	5.87	39.92	53.02	47.44	54.00	6.56	Average
	2484.430	28.47	5.87	39.92	50.57	44.99	54.00	9.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

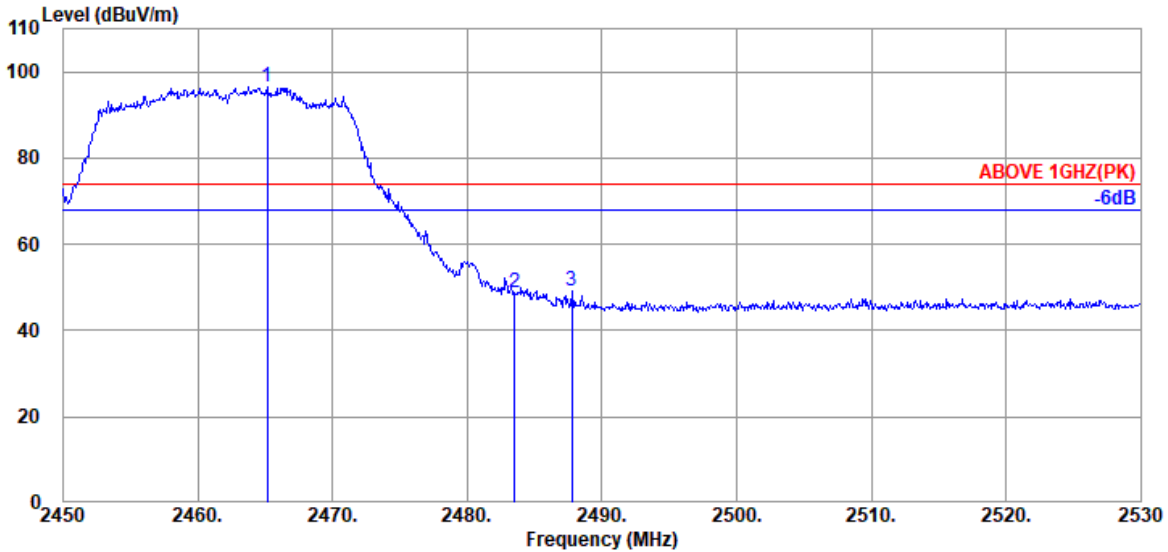

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.120	28.43	5.84	39.92	102.00	96.35	---	---	Peak
	2483.520	28.47	5.87	39.92	54.42	48.84	74.00	25.16	Peak
	2487.760	28.47	5.87	39.92	54.63	49.05	74.00	24.95	Peak

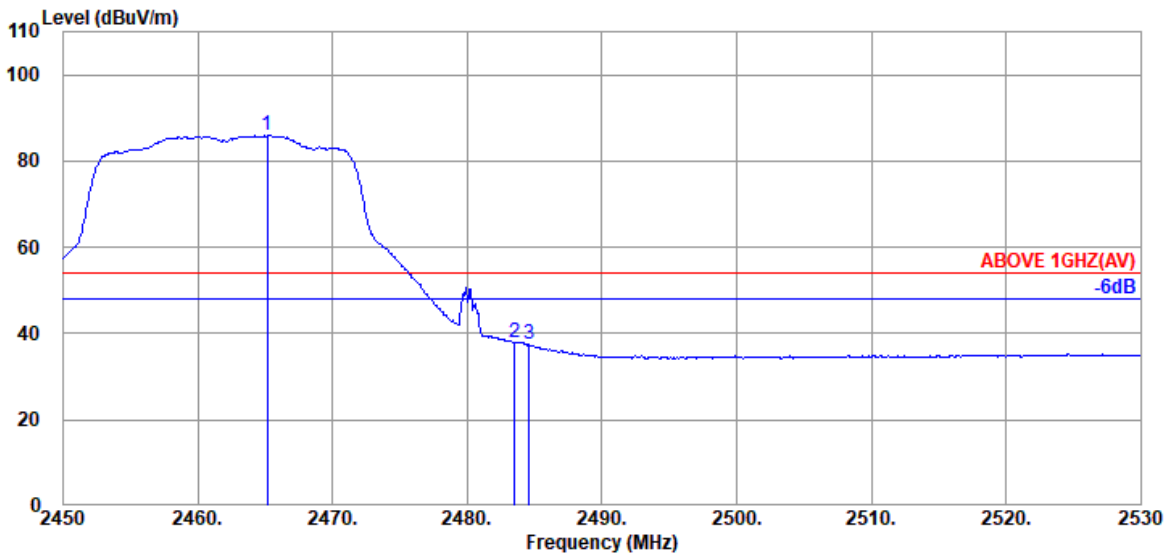


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.120	28.43	5.84	39.92	91.61	85.96	---	---	Average
	2483.520	28.47	5.87	39.92	43.59	38.01	54.00	15.99	Average
	2484.560	28.47	5.87	39.92	42.94	37.36	54.00	16.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

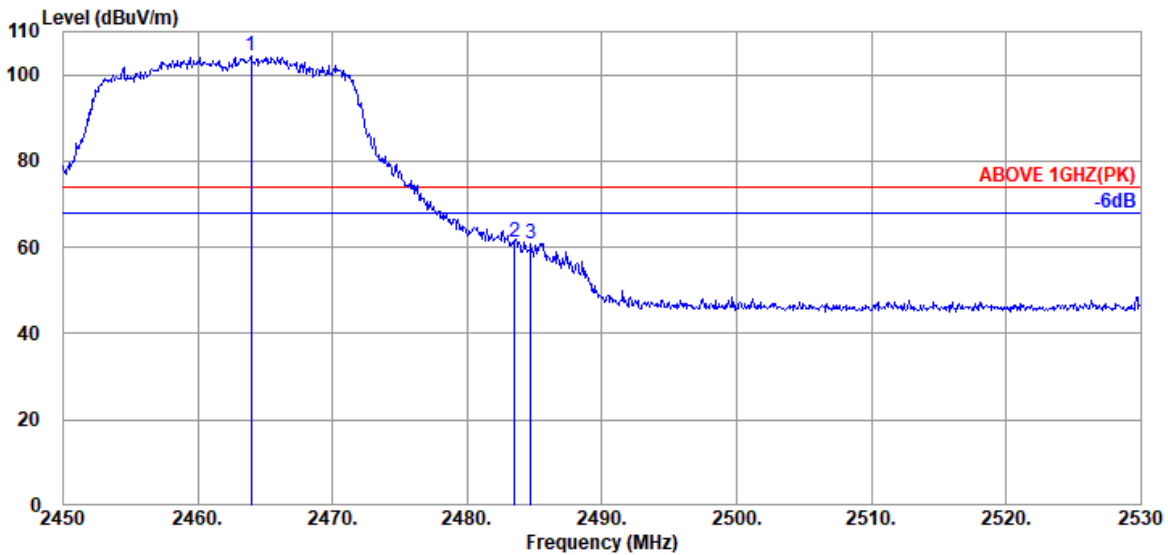

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.920	28.43	5.84	39.92	110.02	104.37	---	---	Peak
	2483.520	28.47	5.87	39.92	66.79	61.21	74.00	12.79	Peak
	2484.720	28.47	5.87	39.92	66.43	60.85	74.00	13.15	Peak

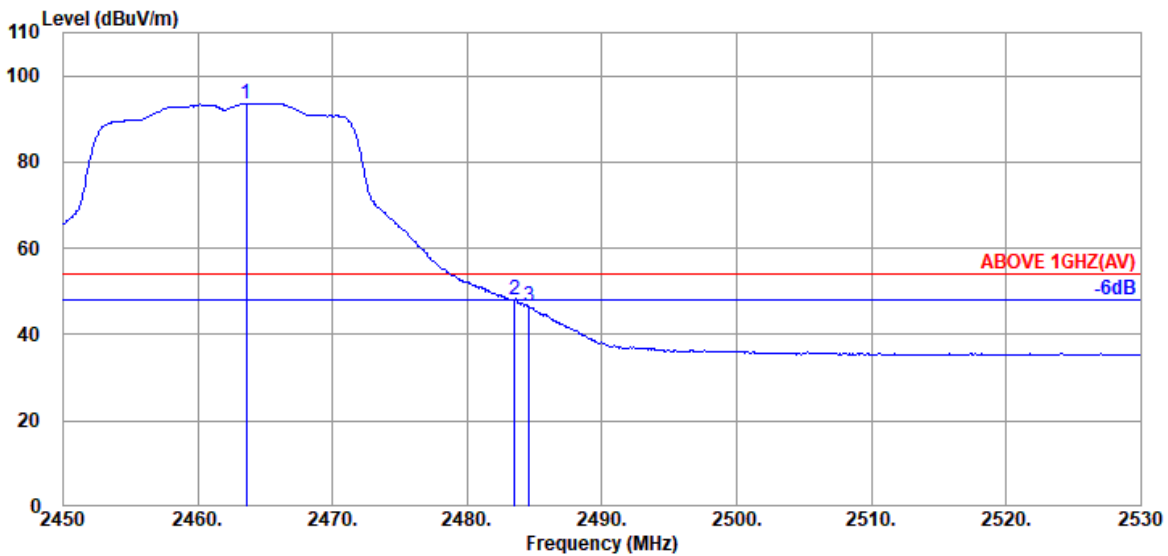


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.600	28.43	5.84	39.92	99.28	93.63	---	---	Average
	2483.520	28.47	5.87	39.92	53.76	48.18	54.00	5.82	Average
	2484.560	28.47	5.87	39.92	51.99	46.41	54.00	7.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

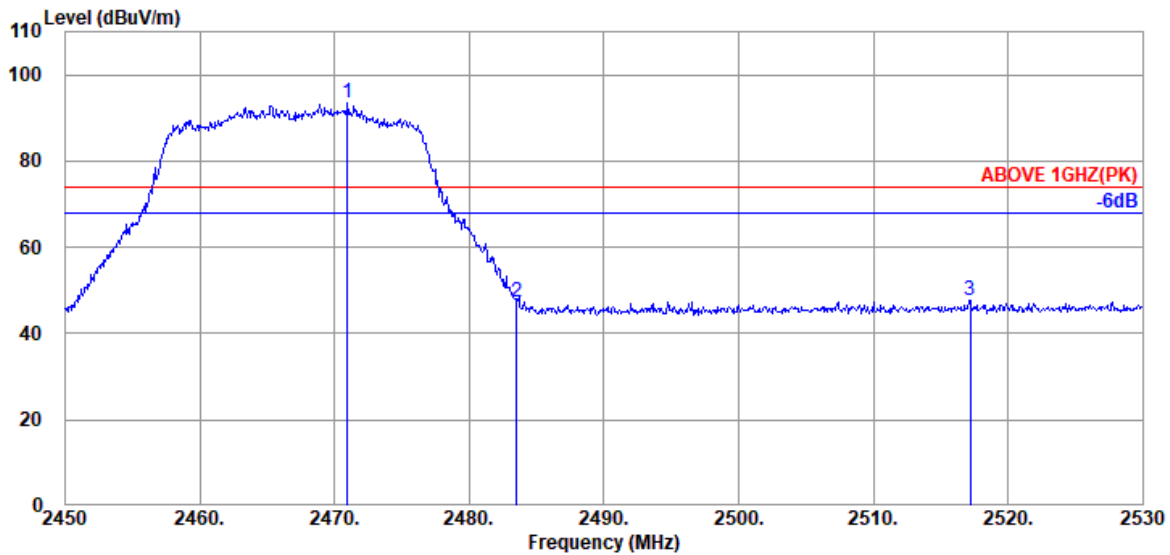

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.960	28.44	5.85	39.92	99.16	93.53	---	---	Peak
	2483.520	28.47	5.87	39.92	52.74	47.16	74.00	26.84	Peak
	2517.200	28.59	5.93	39.93	52.93	47.52	74.00	26.48	Peak

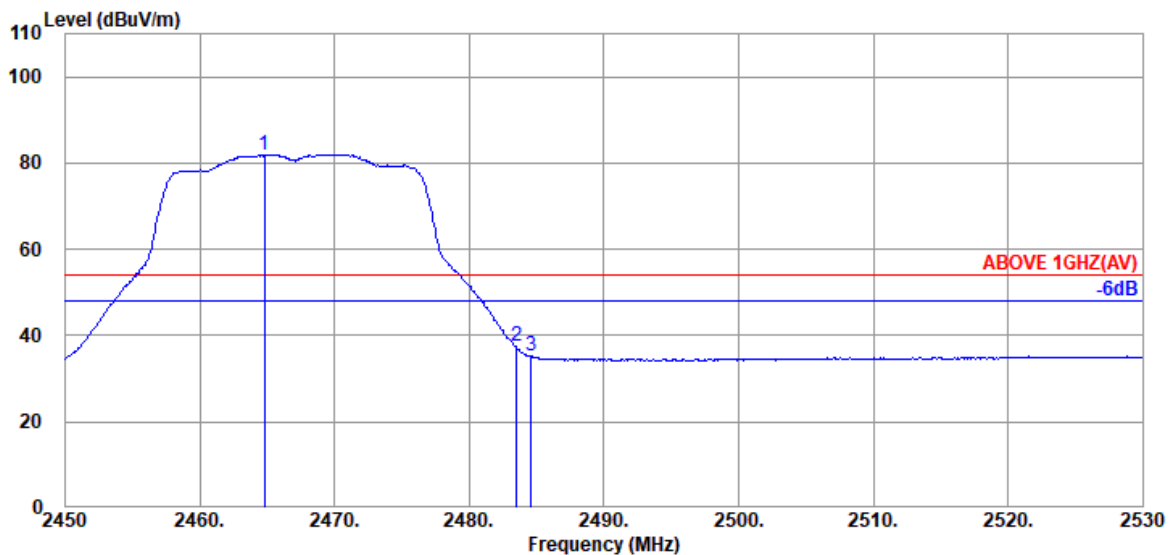


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.800	28.43	5.84	39.92	87.60	81.95	---	---	Average
	2483.520	28.47	5.87	39.92	43.02	37.44	54.00	16.56	Average
	2484.560	28.47	5.87	39.92	40.83	35.25	54.00	18.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

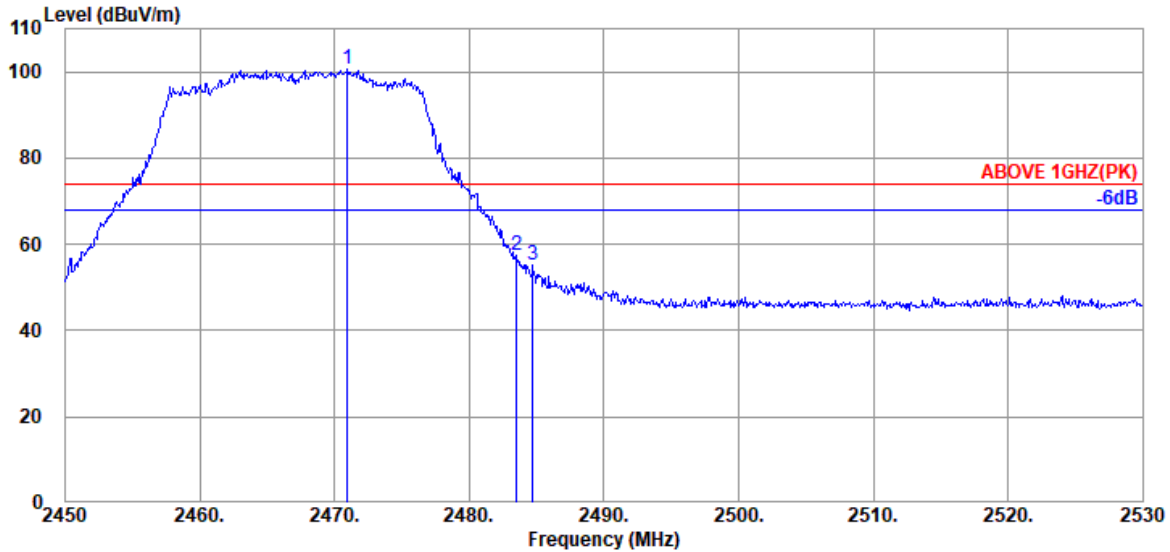

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.960	28.44	5.85	39.92	106.07	100.44	---	---	Peak
2483.520	28.47	5.87	39.92	63.00	57.42	74.00	16.58	Peak
2484.720	28.47	5.87	39.92	60.88	55.30	74.00	18.70	Peak

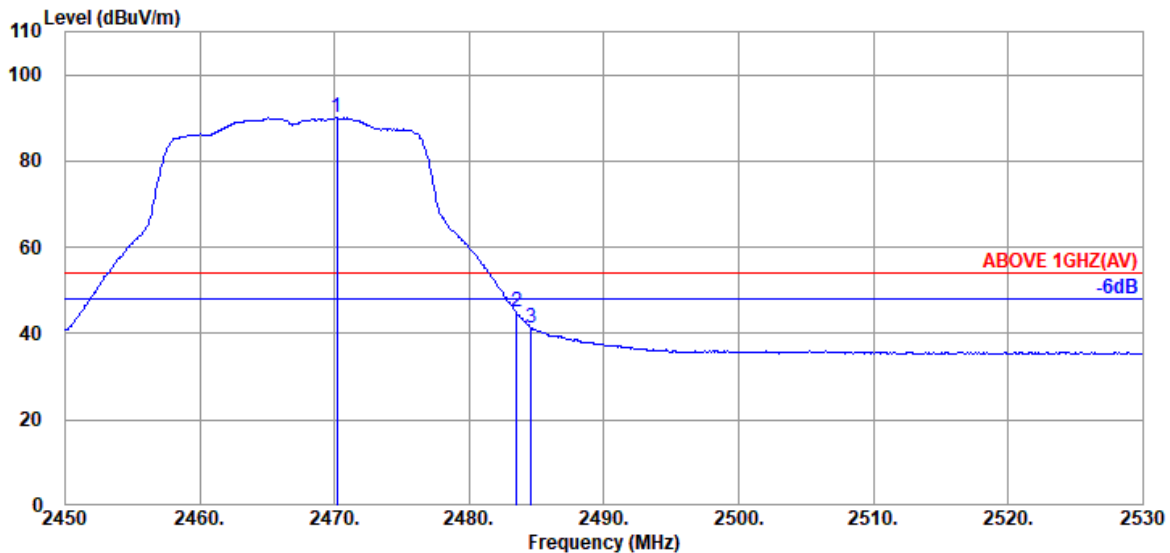


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.160	28.44	5.85	39.92	95.58	89.95	---	---	Average
2483.520	28.47	5.87	39.92	50.47	44.89	54.00	9.11	Average
2484.560	28.47	5.87	39.92	47.03	41.45	54.00	12.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

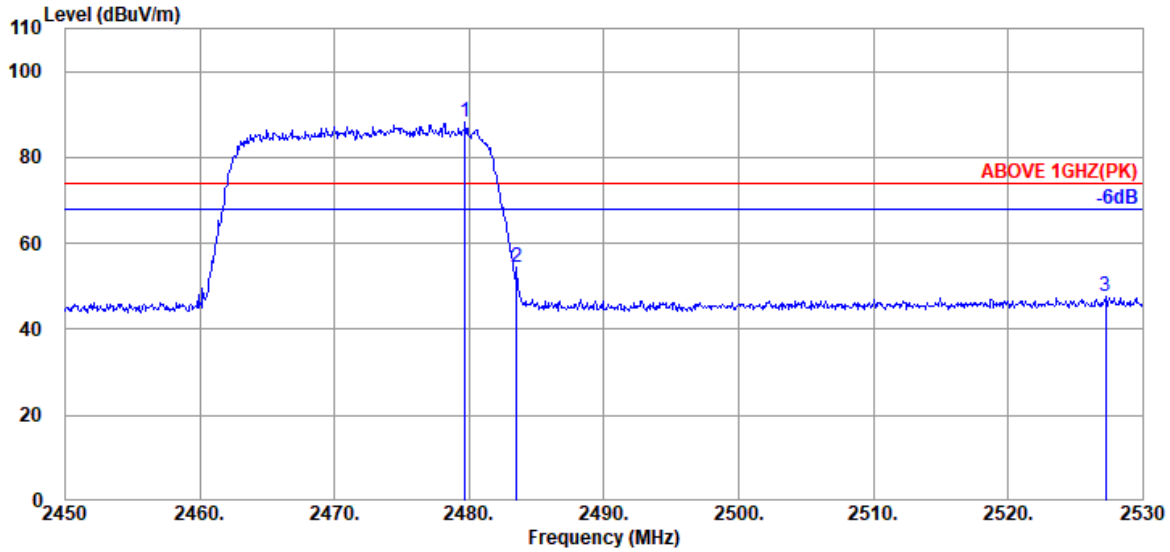

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.680	28.46	5.86	39.92	93.70	88.10	---	---	Peak
2483.520	28.47	5.87	39.92	59.99	54.41	74.00	19.59	Peak
2527.280	28.67	5.96	39.93	53.11	47.81	74.00	26.19	Peak

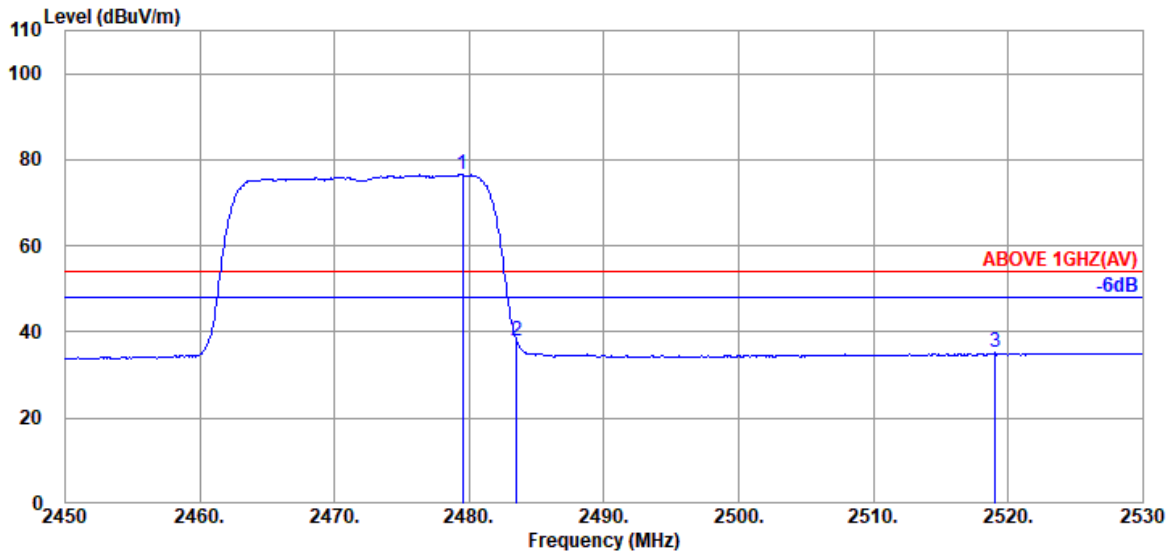


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.520	28.46	5.86	39.92	82.08	76.48	---	---	Average
2483.520	28.47	5.87	39.92	43.52	37.94	54.00	16.06	Average
2519.040	28.63	5.94	39.93	40.49	35.13	54.00	18.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

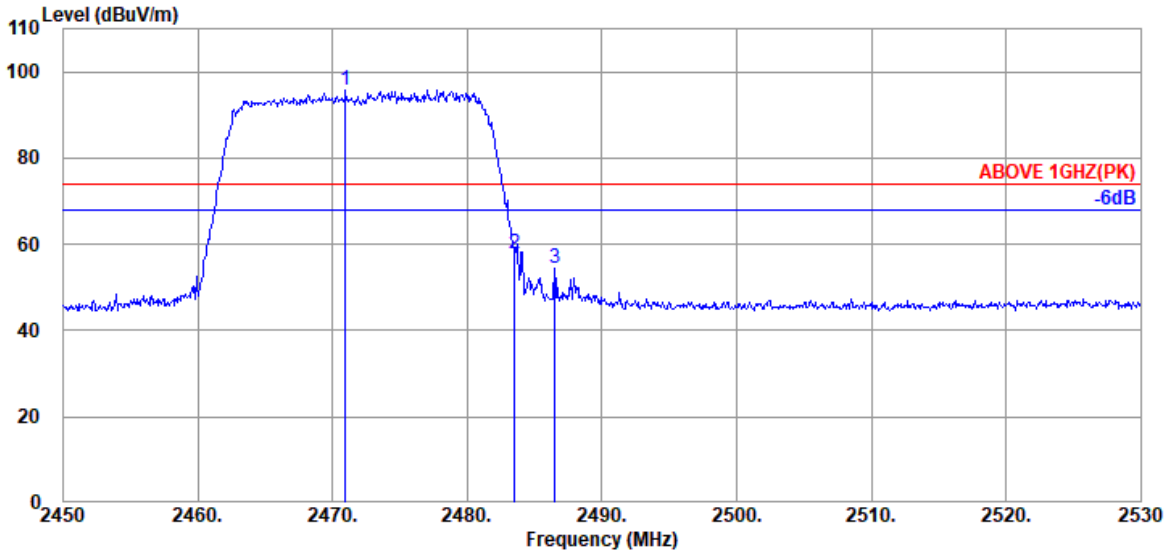

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.960	28.44	5.85	39.92	101.46	95.83	---	---	Peak
2483.520	28.47	5.87	39.92	63.48	57.90	74.00	16.10	Peak
2486.480	28.47	5.87	39.92	60.20	54.62	74.00	19.38	Peak

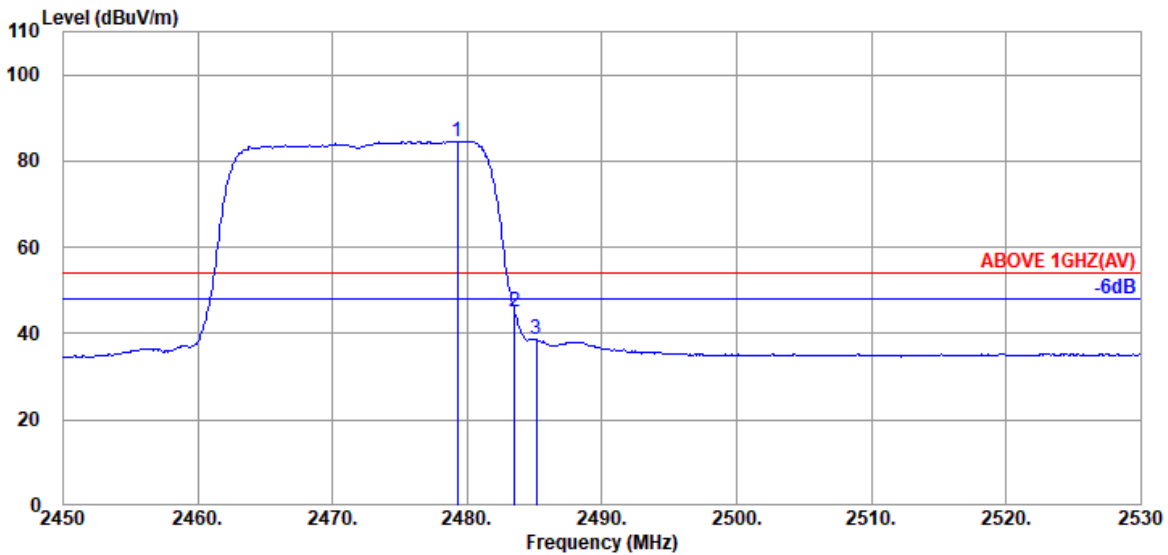


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.280	28.46	5.86	39.92	90.23	84.63	---	---	Average
2483.520	28.47	5.87	39.92	50.49	44.91	54.00	9.09	Average
2485.120	28.47	5.87	39.92	44.32	38.74	54.00	15.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

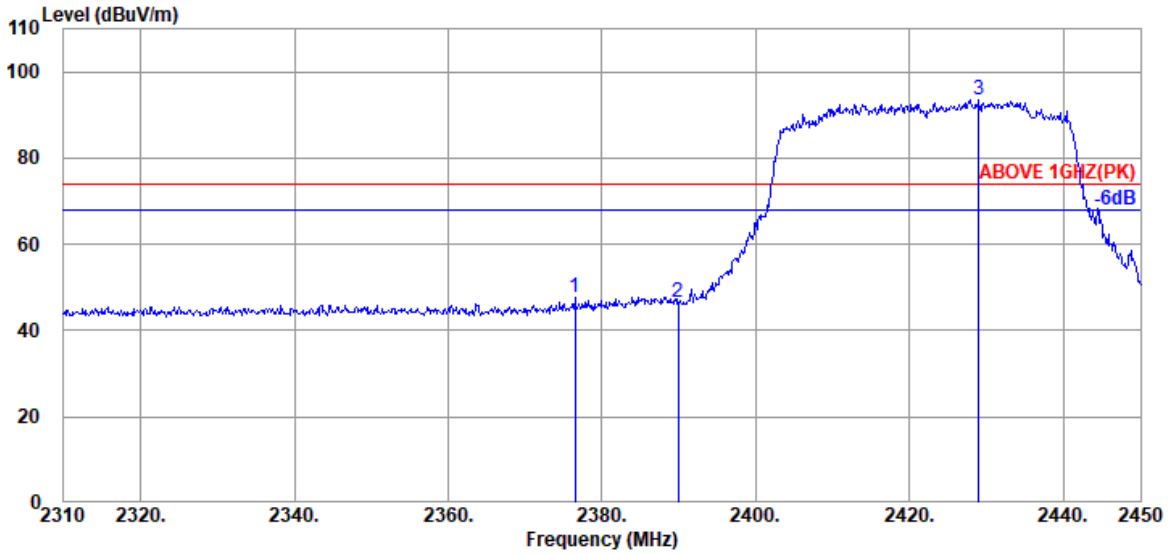

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.500	28.33	5.70	39.93	53.45	47.55	74.00	26.45	Peak
2389.940	28.21	5.72	39.93	52.53	46.53	74.00	27.47	Peak
@ 2429.000	28.27	5.78	39.93	99.37	93.49	---	---	Peak

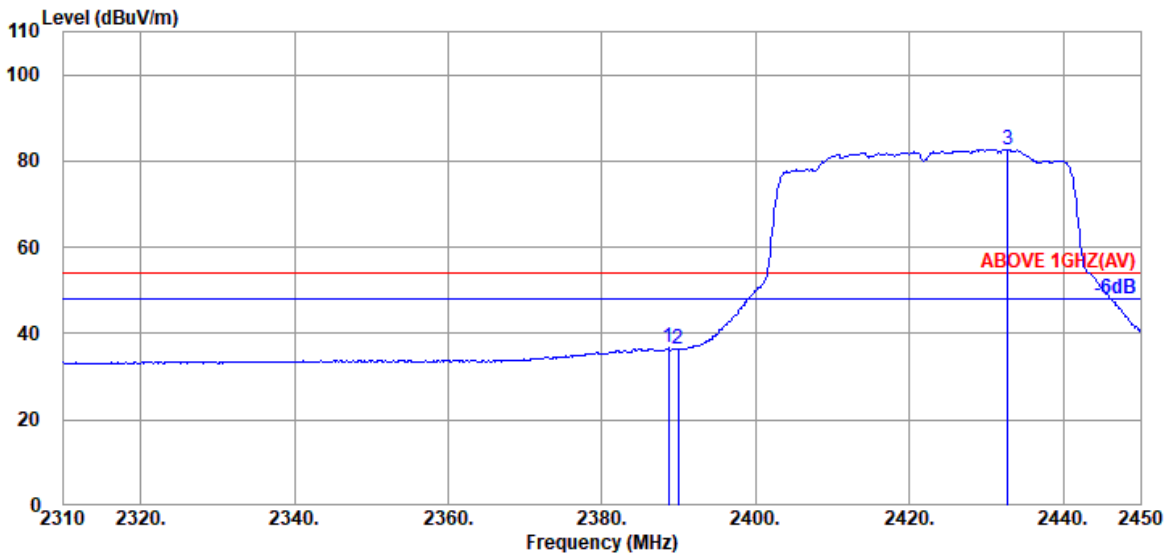


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.680	28.21	5.72	39.93	42.61	36.61	54.00	17.39	Average
2389.940	28.21	5.72	39.93	42.53	36.53	54.00	17.47	Average
@ 2432.780	28.31	5.79	39.93	88.57	82.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

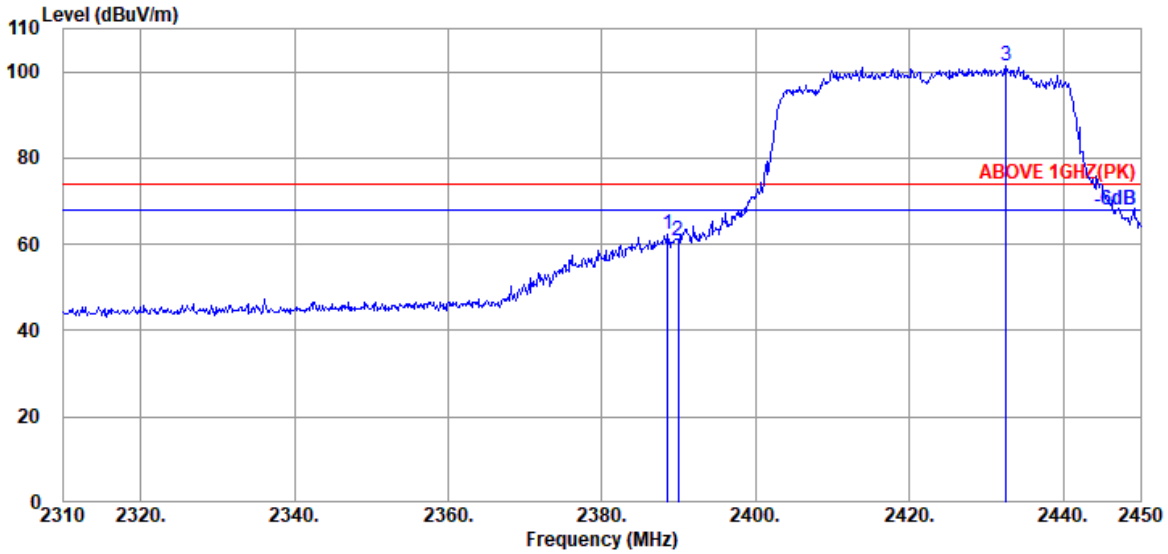

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.540	28.21	5.72	39.93	68.45	62.45	74.00	11.55	Peak
2389.940	28.21	5.72	39.93	67.00	61.00	74.00	13.00	Peak
@ 2432.500	28.31	5.79	39.93	107.36	101.53	---	---	Peak

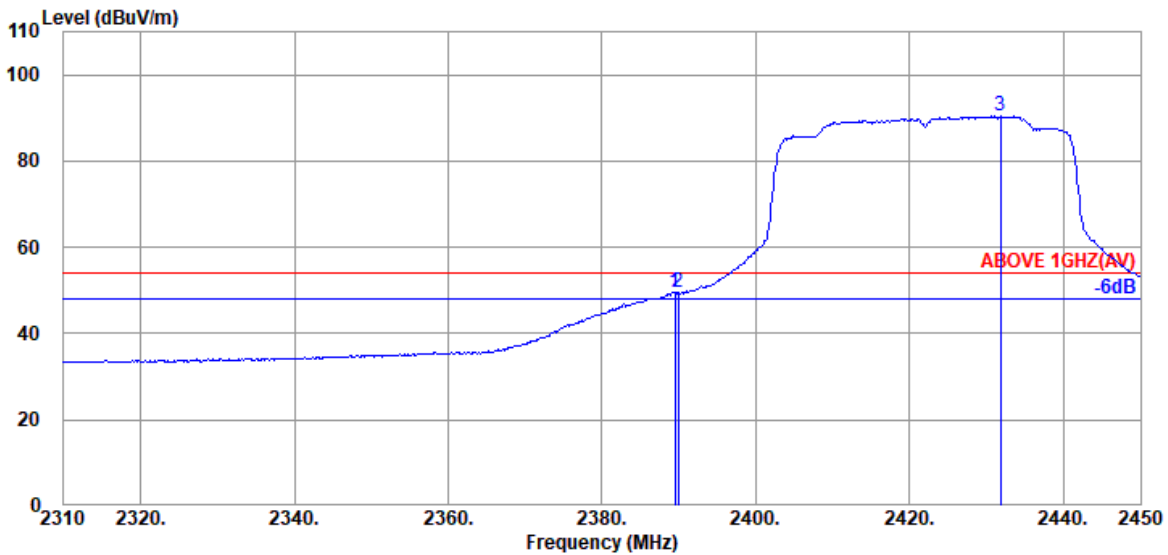


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.21	5.72	39.93	55.67	49.67	54.00	4.33	Average
2389.940	28.21	5.72	39.93	55.47	49.47	54.00	4.53	Average
@ 2431.800	28.27	5.78	39.93	96.26	90.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

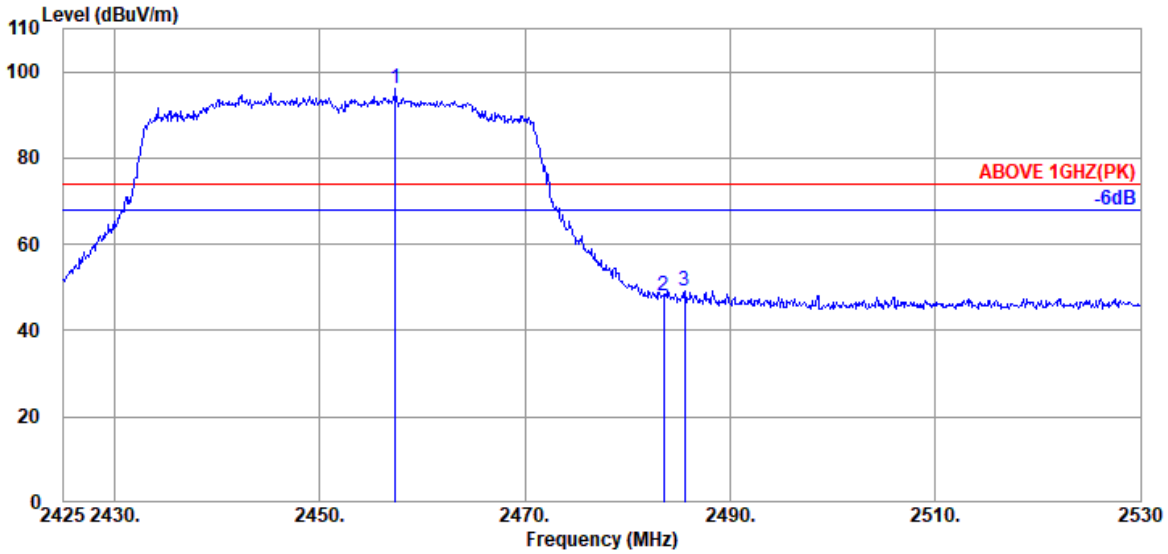

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.340	28.41	5.83	39.92	101.94	96.26	---	---	Peak
	2483.485	28.47	5.87	39.92	53.78	48.20	74.00	25.80	Peak
	2485.585	28.47	5.87	39.92	54.86	49.28	74.00	24.72	Peak

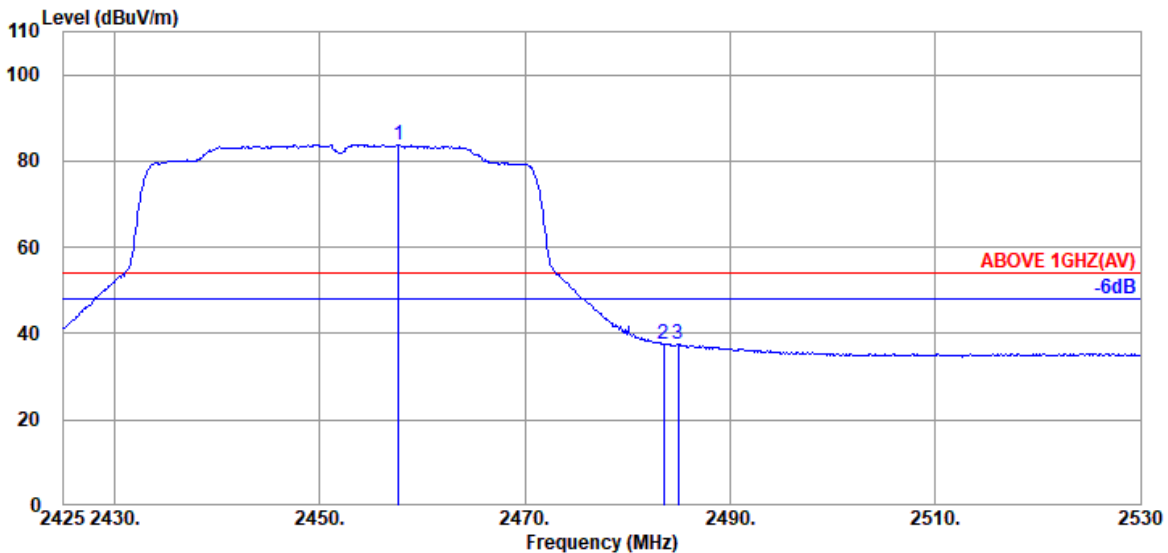


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.655	28.41	5.83	39.92	89.52	83.84	---	---	Average
	2483.485	28.47	5.87	39.92	43.27	37.69	54.00	16.31	Average
	2484.955	28.47	5.87	39.92	43.11	37.53	54.00	16.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

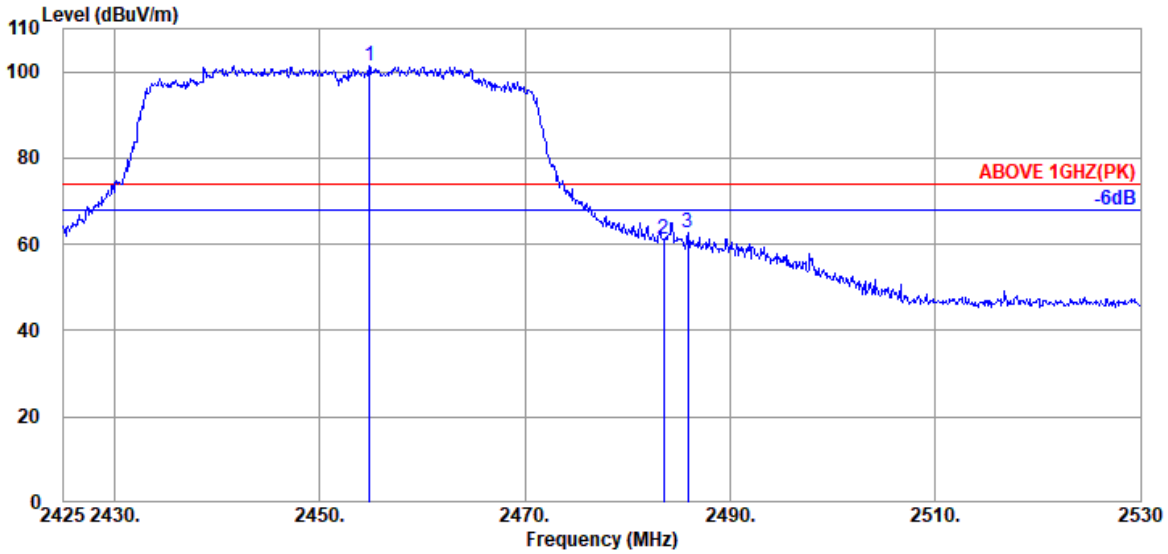

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.820	28.41	5.83	39.92	106.95	101.27	---	---	Peak
	2483.485	28.47	5.87	39.92	66.93	61.35	74.00	12.65	Peak
	2485.900	28.47	5.87	39.92	68.14	62.56	74.00	11.44	Peak

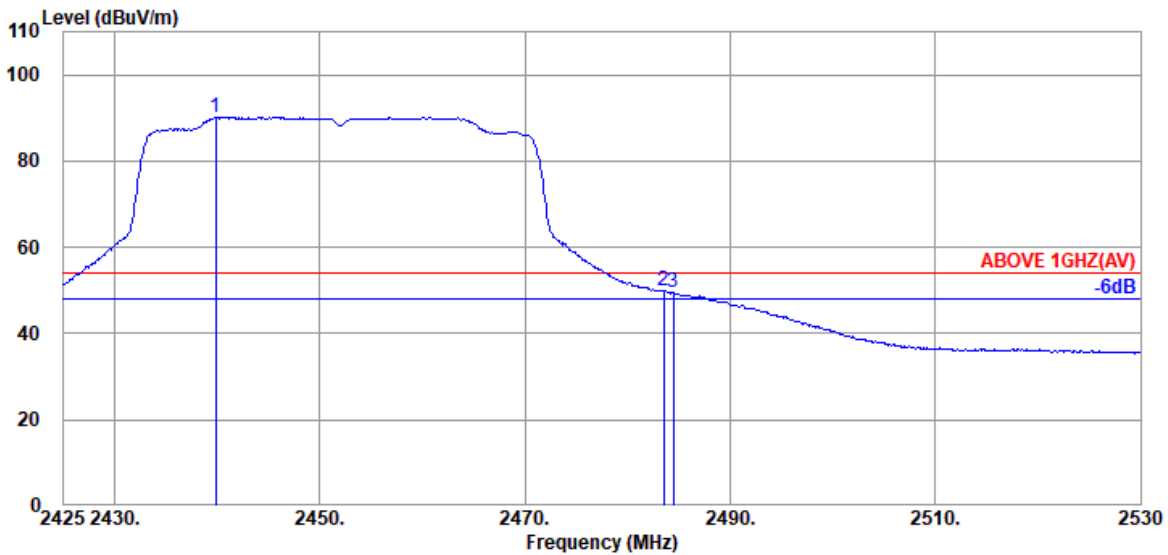


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2439.805	28.36	5.80	39.93	95.95	90.18	---	---	Average
	2483.485	28.47	5.87	39.92	55.40	49.82	54.00	4.18	Average
	2484.430	28.47	5.87	39.92	55.06	49.48	54.00	4.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

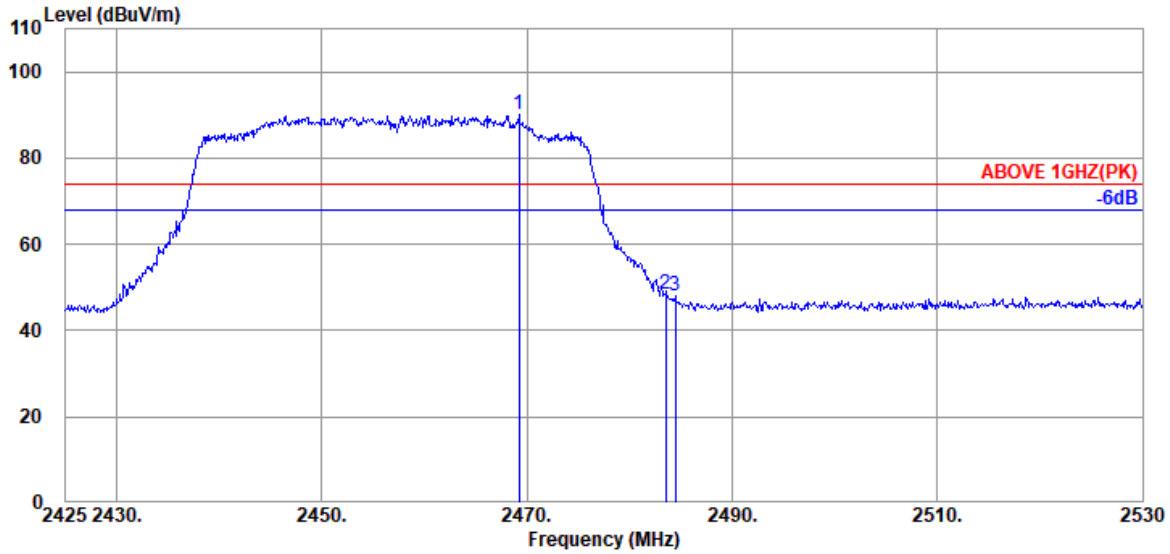

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.205	28.44	5.85	39.92	95.71	90.08	---	---	Peak
	2483.485	28.47	5.87	39.92	53.99	48.41	74.00	25.59	Peak
	2484.430	28.47	5.87	39.92	53.77	48.19	74.00	25.81	Peak

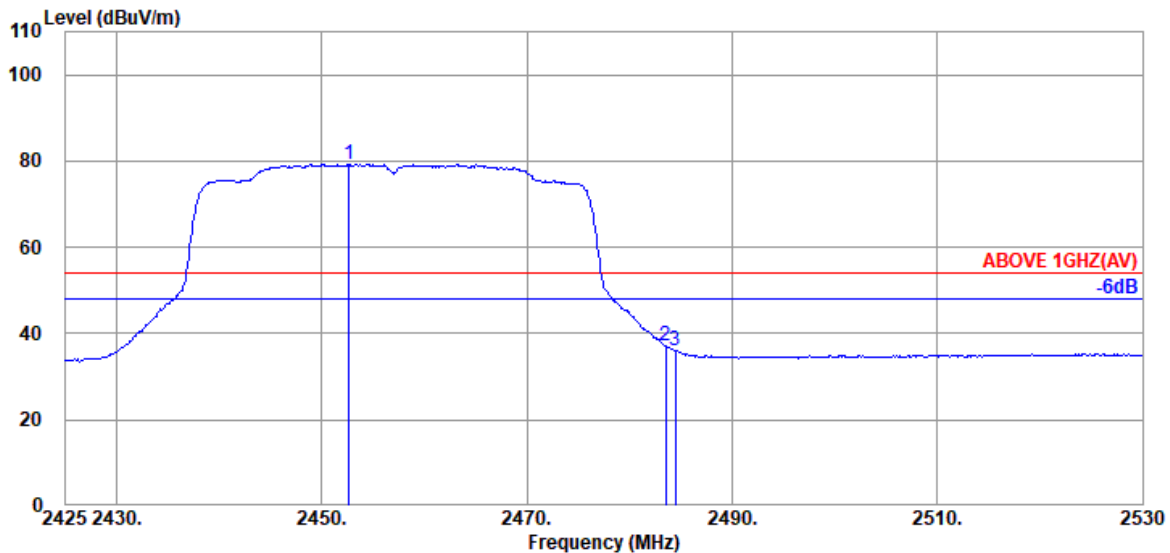


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.615	28.40	5.81	39.92	84.99	79.28	---	---	Average
	2483.485	28.47	5.87	39.92	42.75	37.17	54.00	16.83	Average
	2484.430	28.47	5.87	39.92	41.61	36.03	54.00	17.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

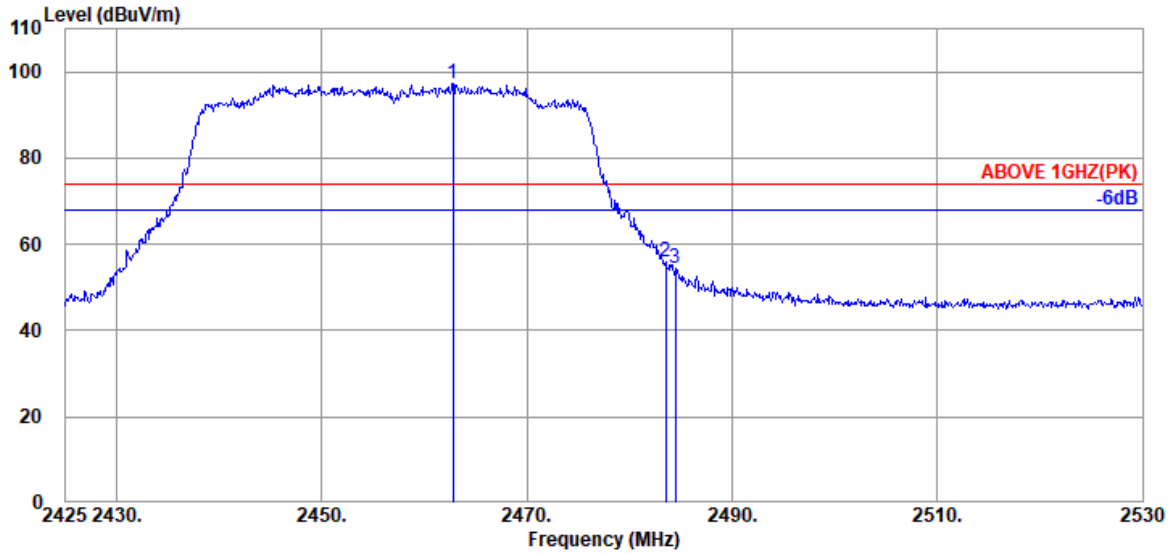

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.800	28.43	5.84	39.92	102.98	97.33	---	---	Peak
	2483.485	28.47	5.87	39.92	61.53	55.95	74.00	18.05	Peak
	2484.430	28.47	5.87	39.92	60.05	54.47	74.00	19.53	Peak

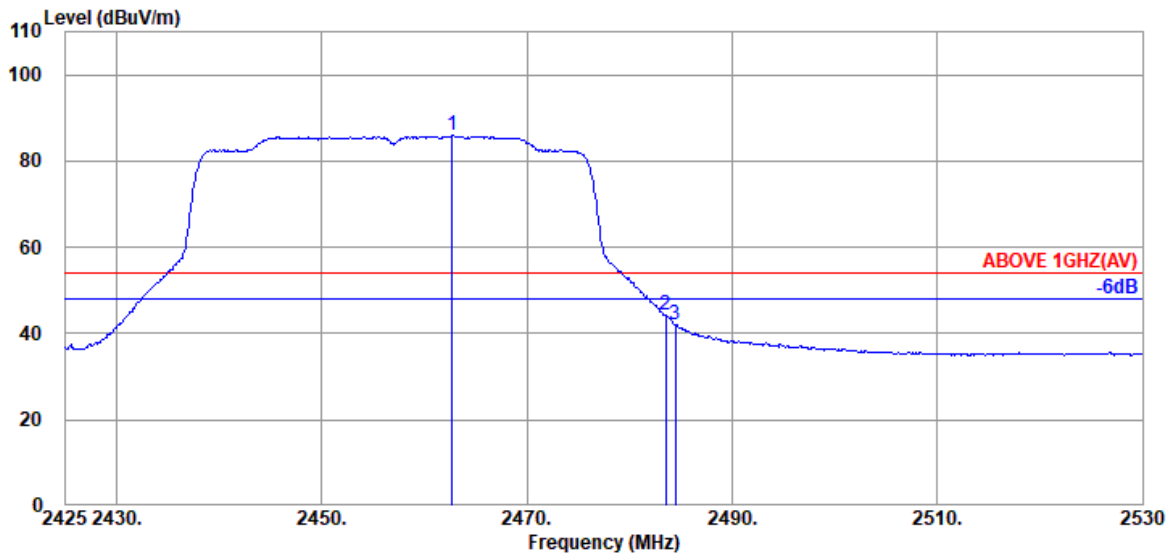


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.695	28.43	5.84	39.92	91.66	86.01	---	---	Average
	2483.485	28.47	5.87	39.92	49.72	44.14	54.00	9.86	Average
	2484.430	28.47	5.87	39.92	47.60	42.02	54.00	11.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

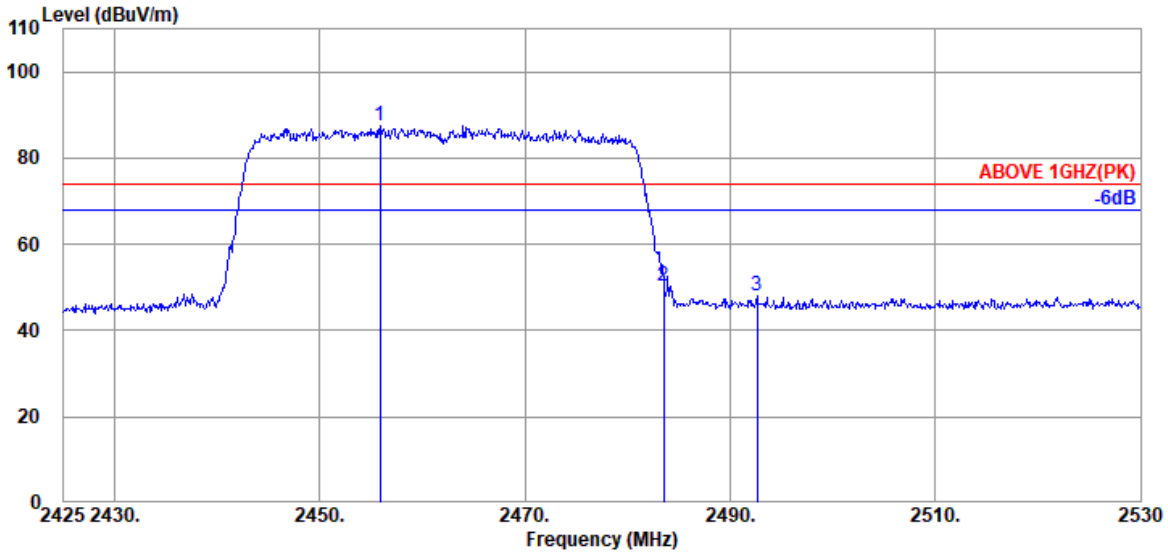

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.870	28.41	5.83	39.92	93.23	87.55	---	---	Peak
	2483.485	28.47	5.87	39.92	55.72	50.14	74.00	23.86	Peak
	2492.620	28.49	5.88	39.92	53.68	48.13	74.00	25.87	Peak

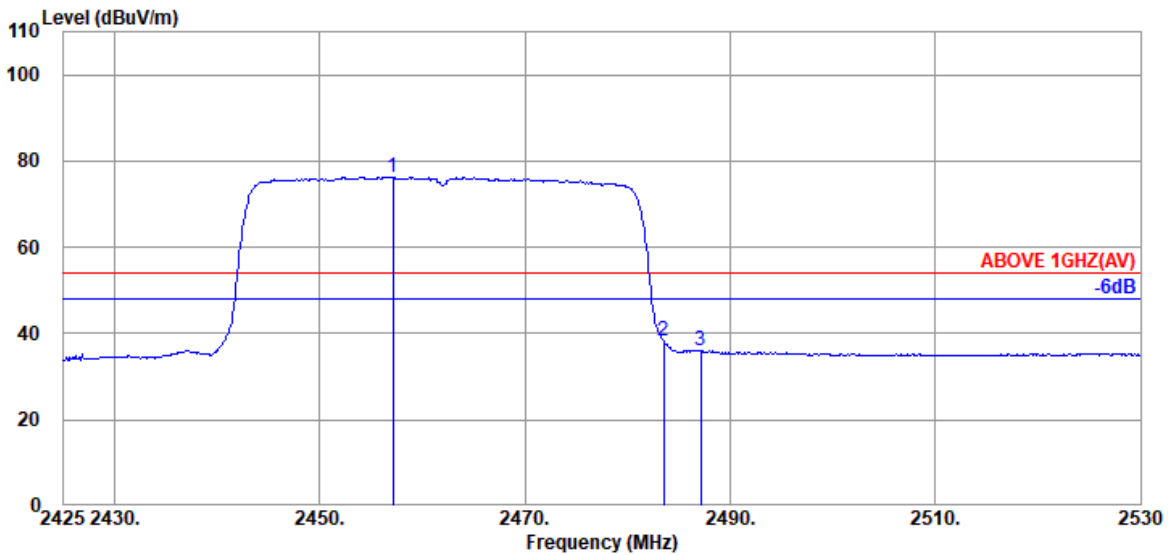


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.130	28.41	5.83	39.92	82.02	76.34	---	---	Average
	2483.485	28.47	5.87	39.92	43.84	38.26	54.00	15.74	Average
	2487.160	28.47	5.87	39.92	41.75	36.17	54.00	17.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

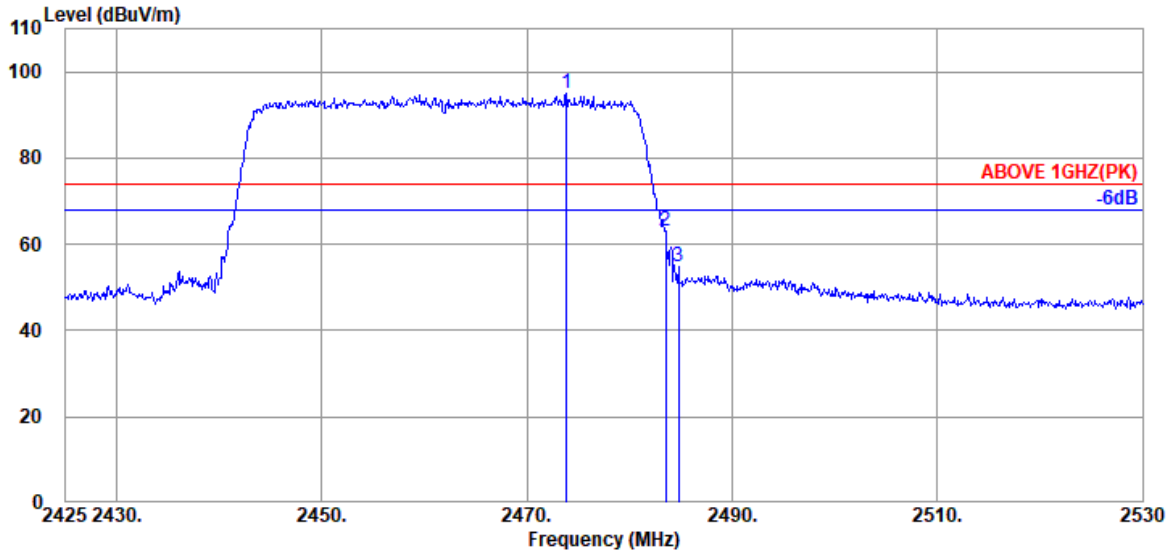

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.825	28.44	5.85	39.92	100.65	95.02	---	---	Peak
	2483.485	28.47	5.87	39.92	68.73	63.15	74.00	10.85	Peak
	2484.745	28.47	5.87	39.92	60.22	54.64	74.00	19.36	Peak

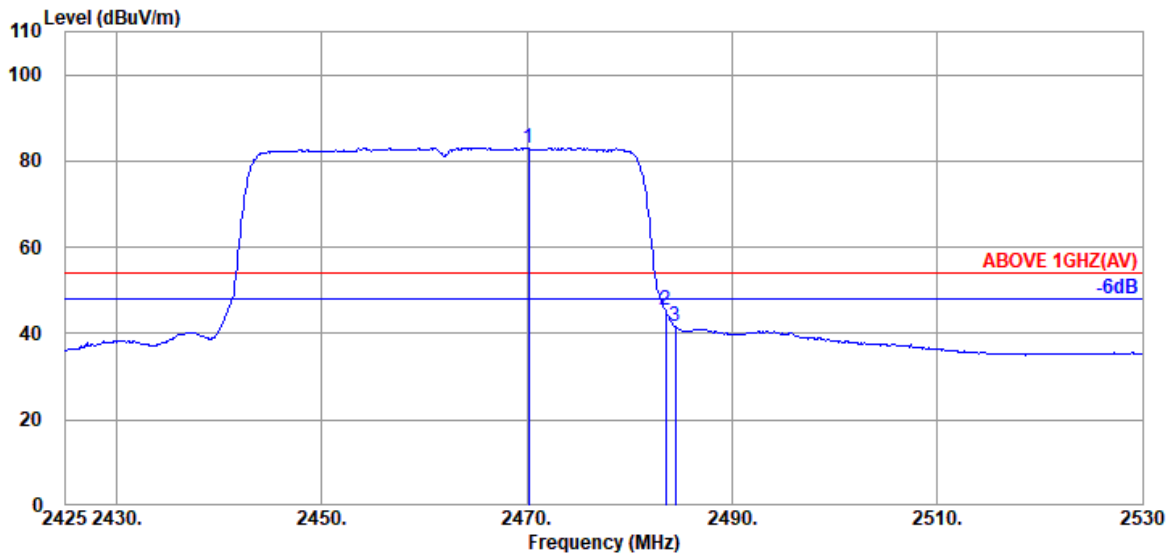


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.150	28.44	5.85	39.92	88.70	83.07	---	---	Average
	2483.485	28.47	5.87	39.92	50.89	45.31	54.00	8.69	Average
	2484.430	28.47	5.87	39.92	47.17	41.59	54.00	12.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

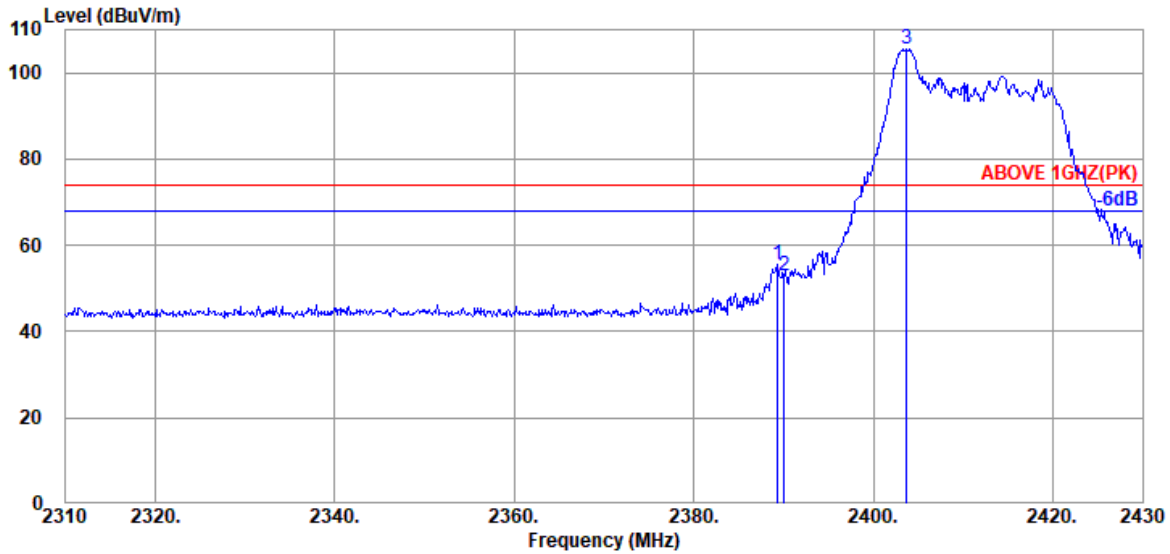

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	61.43	55.43	74.00	18.57	Peak
2390.040	28.21	5.72	39.93	58.94	52.94	74.00	21.06	Peak
@ 2403.720	28.10	5.74	39.93	111.72	105.63	---	---	Peak

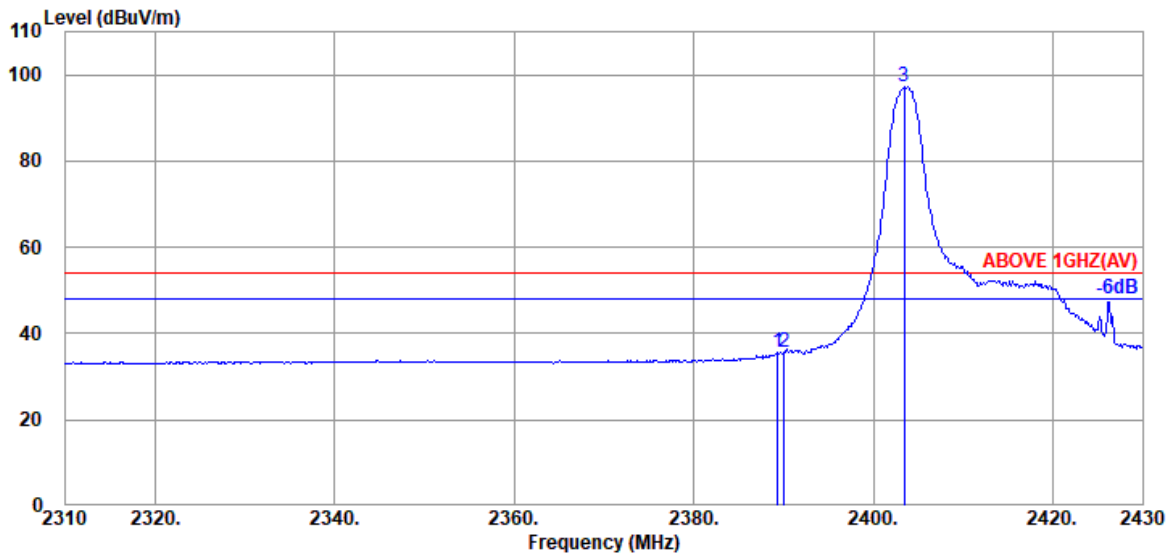


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	41.76	35.76	54.00	18.24	Average
2390.040	28.21	5.72	39.93	41.53	35.53	54.00	18.47	Average
@ 2403.480	28.10	5.74	39.93	103.27	97.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

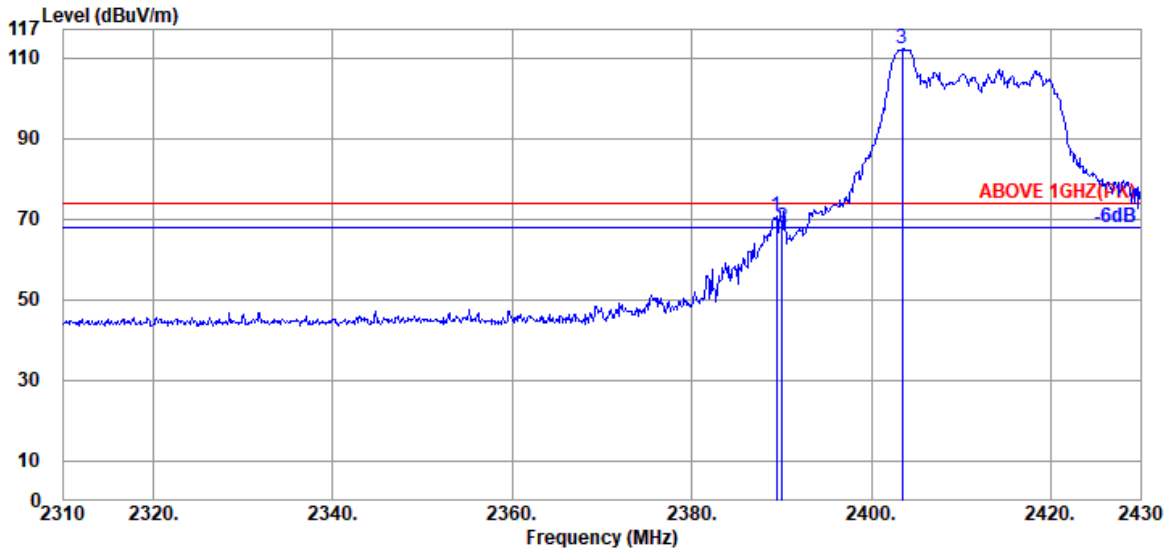

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	76.61	70.61	74.00	3.39	Peak
2390.040	28.21	5.72	39.93	73.93	67.93	74.00	6.07	Peak
@ 2403.480	28.10	5.74	39.93	118.17	112.08	---	---	Peak

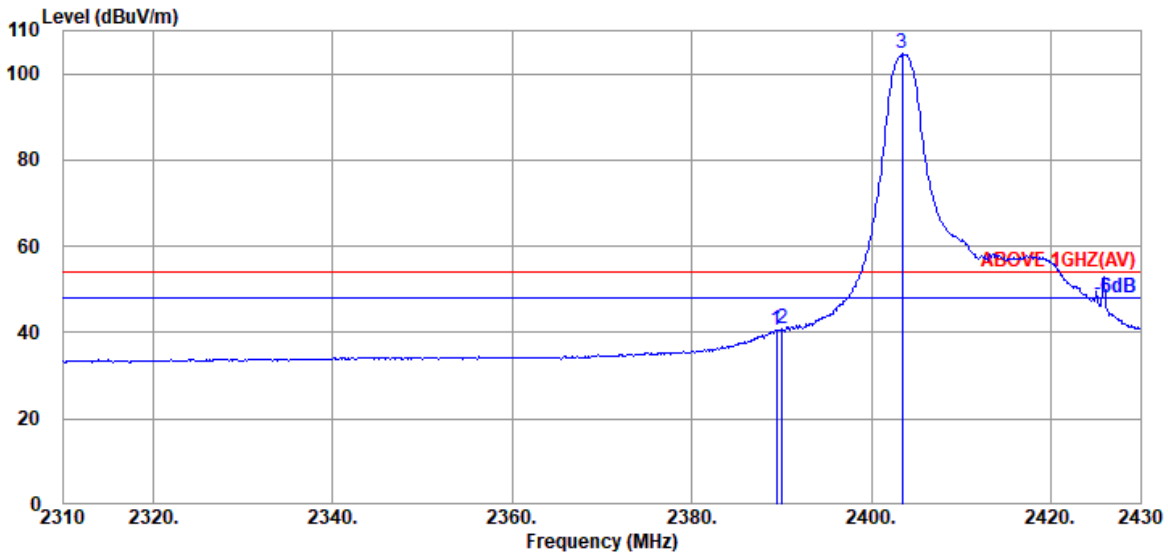


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	46.65	40.65	54.00	13.35	Average
2390.040	28.21	5.72	39.93	46.91	40.91	54.00	13.09	Average
@ 2403.480	28.10	5.74	39.93	110.74	104.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

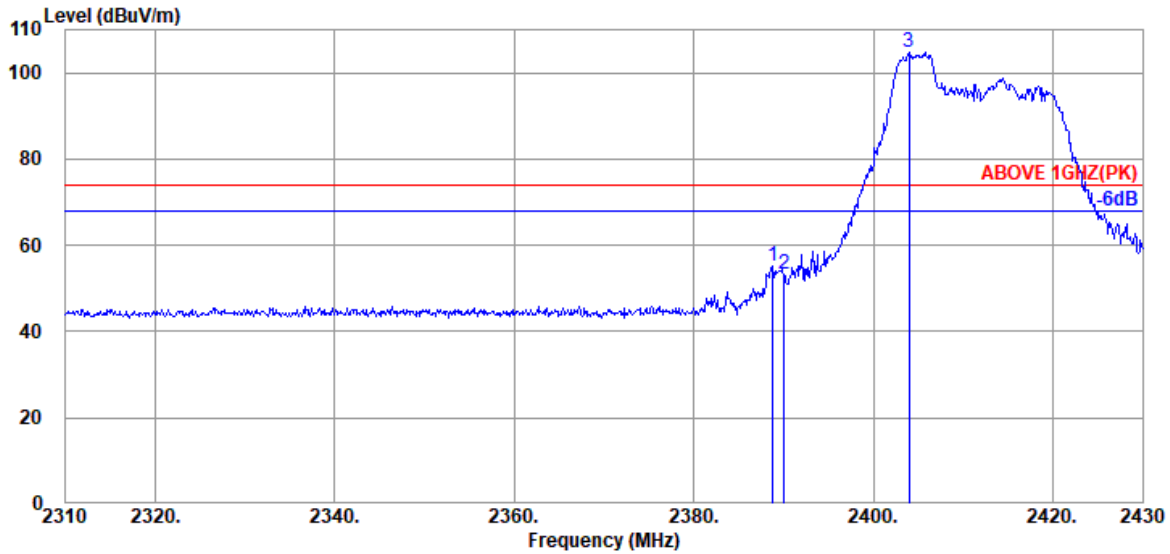

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.21	5.72	39.93	61.27	55.27	74.00	18.73	Peak
2390.040	28.21	5.72	39.93	59.45	53.45	74.00	20.55	Peak
@ 2403.960	28.10	5.74	39.93	110.88	104.79	---	---	Peak

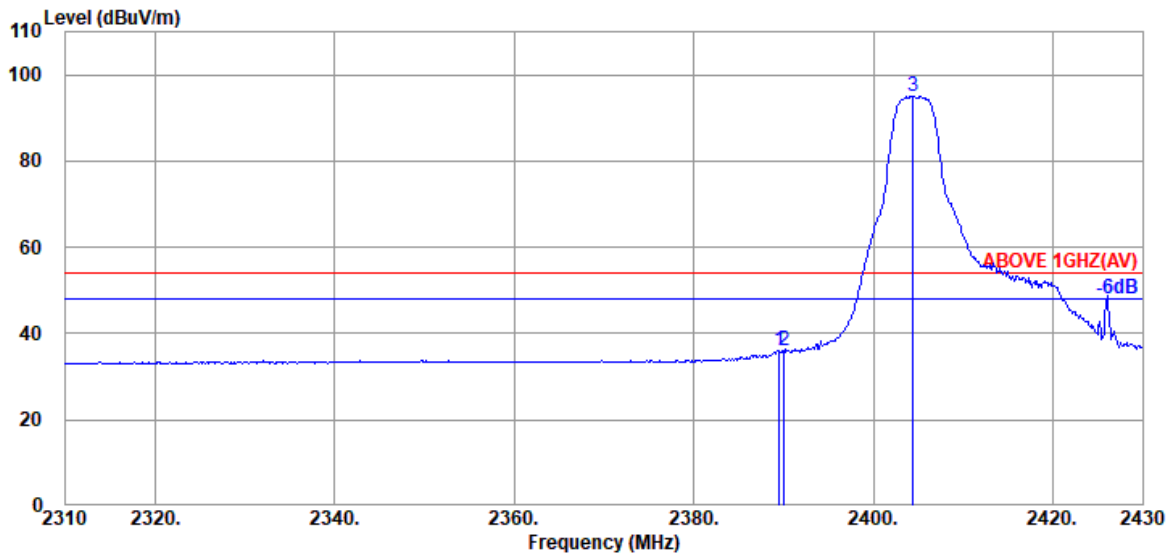


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	42.20	36.20	54.00	17.80	Average
2390.040	28.21	5.72	39.93	42.08	36.08	54.00	17.92	Average
@ 2404.440	28.14	5.75	39.93	101.03	94.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

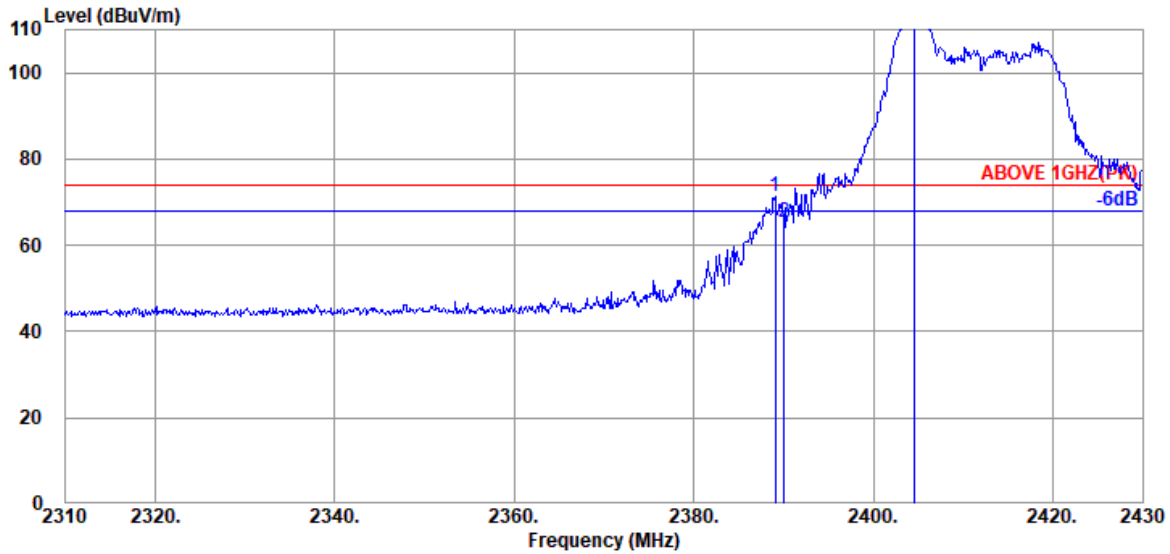

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.21	5.72	39.93	77.36	71.36	74.00	2.64	Peak
2390.040	28.21	5.72	39.93	71.42	65.42	74.00	8.58	Peak
@ 2404.560	28.14	5.75	39.93	117.76	111.72	---	---	Peak

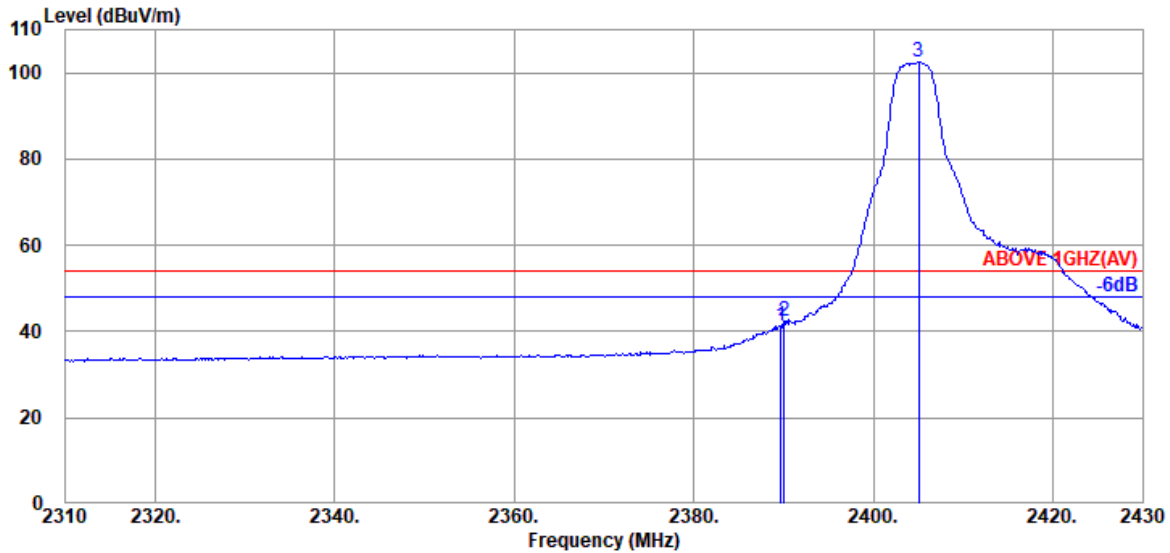


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	47.36	41.36	54.00	12.64	Average
2390.040	28.21	5.72	39.93	48.55	42.55	54.00	11.45	Average
@ 2405.040	28.14	5.75	39.93	108.52	102.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

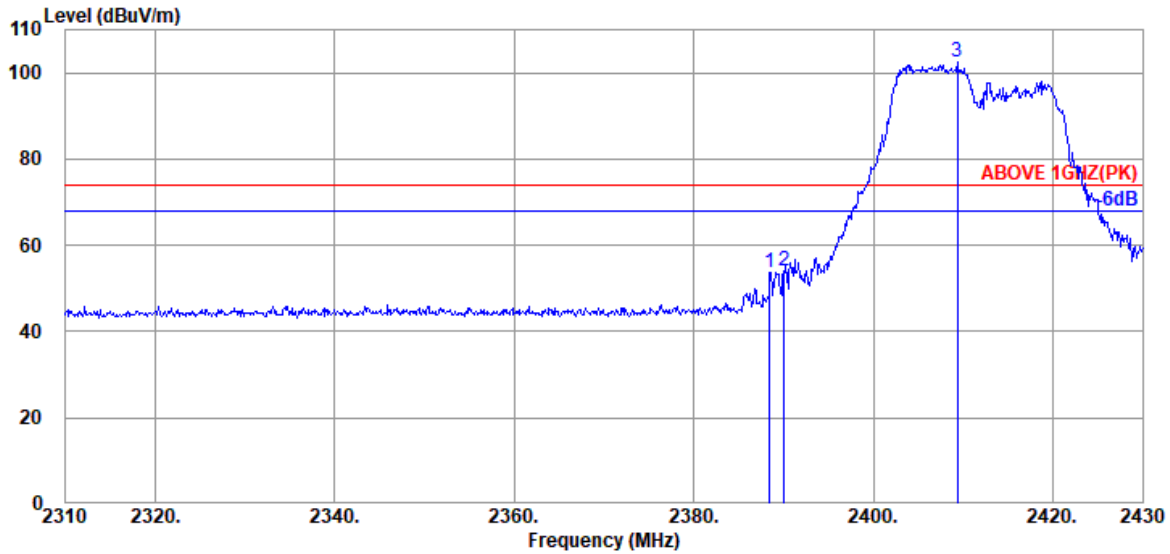

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.480	28.21	5.72	39.93	59.73	53.73	74.00	20.27	Peak
2390.040	28.21	5.72	39.93	60.09	54.09	74.00	19.91	Peak
@ 2409.360	28.14	5.75	39.93	108.38	102.34	---	---	Peak

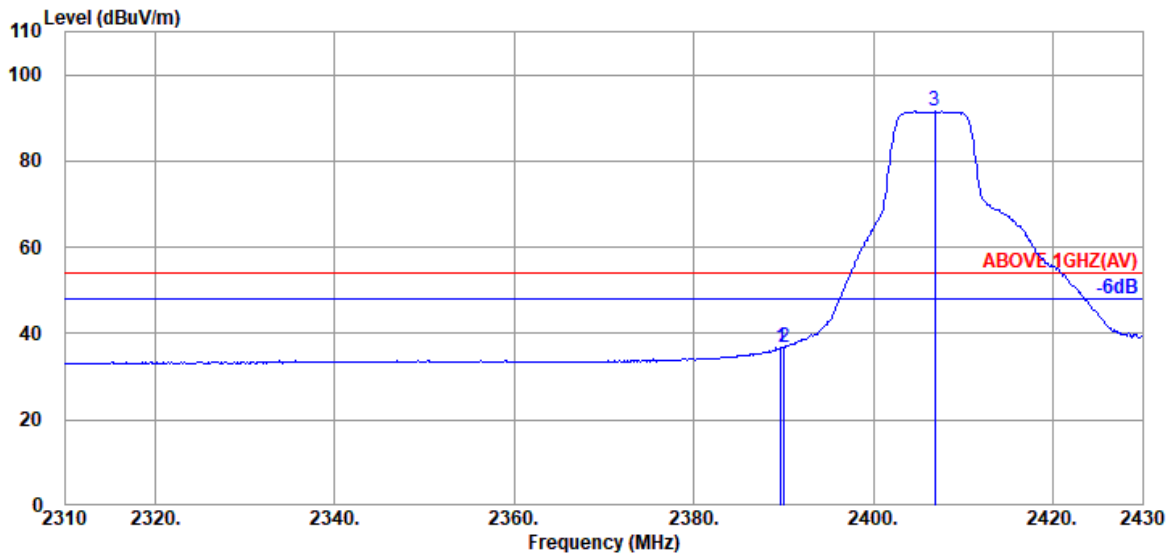


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	42.81	36.81	54.00	17.19	Average
2390.040	28.21	5.72	39.93	42.69	36.69	54.00	17.31	Average
@ 2406.840	28.14	5.75	39.93	97.67	91.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

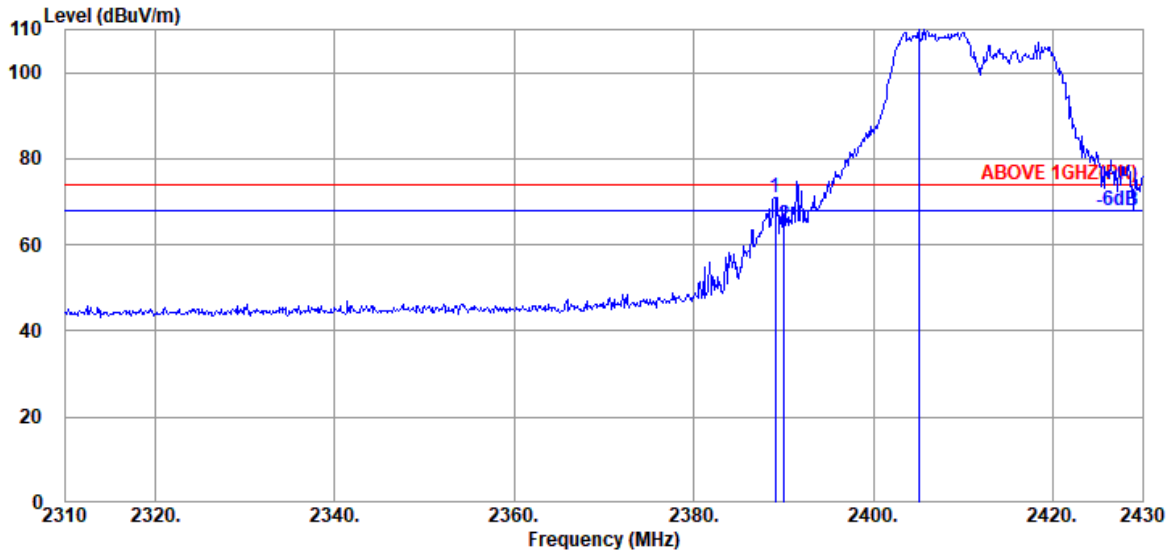

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.21	5.72	39.93	77.13	71.13	74.00	2.87	Peak
2390.040	28.21	5.72	39.93	70.48	64.48	74.00	9.52	Peak
@ 2405.040	28.14	5.75	39.93	116.32	110.28	---	---	Peak

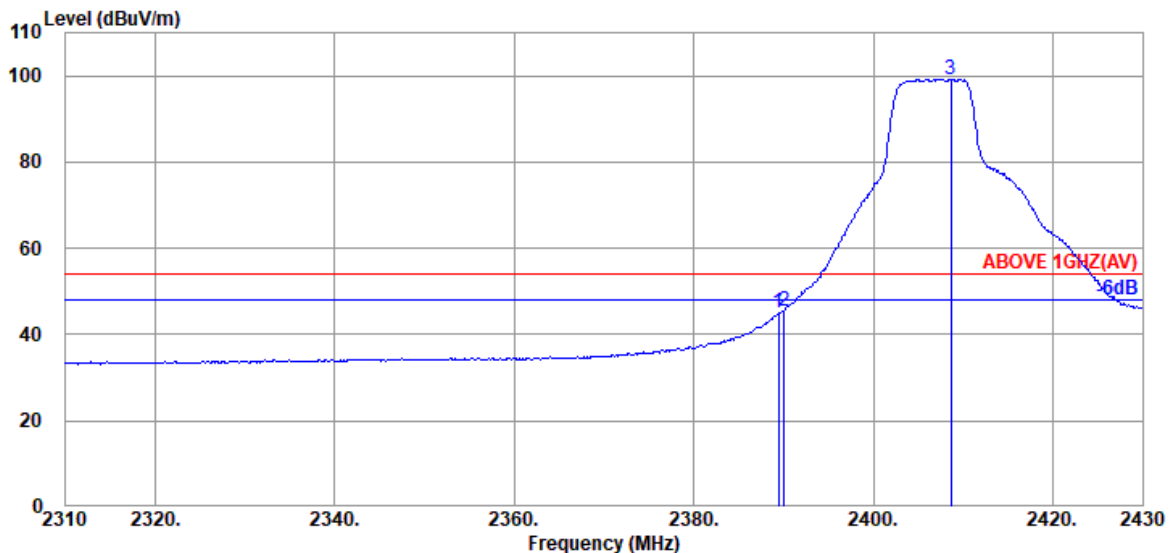


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	51.05	45.05	54.00	8.95	Average
2390.040	28.21	5.72	39.93	51.48	45.48	54.00	8.52	Average
@ 2408.640	28.14	5.75	39.93	105.21	99.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

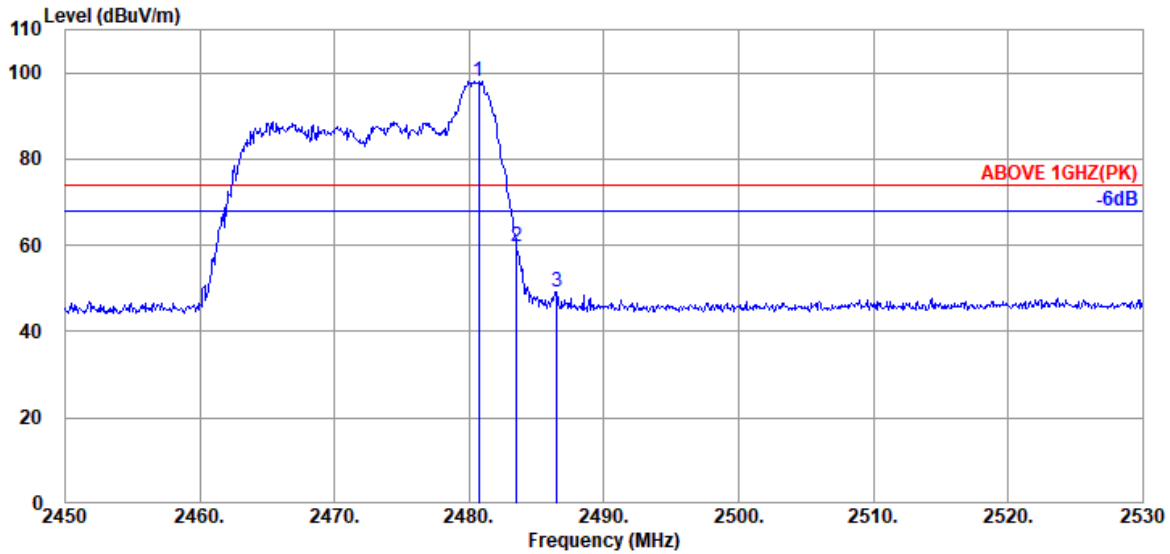

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.720	28.46	5.86	39.92	103.71	98.11	---	---	Peak
2483.520	28.47	5.87	39.92	65.28	59.70	74.00	14.30	Peak
2486.480	28.47	5.87	39.92	54.81	49.23	74.00	24.77	Peak

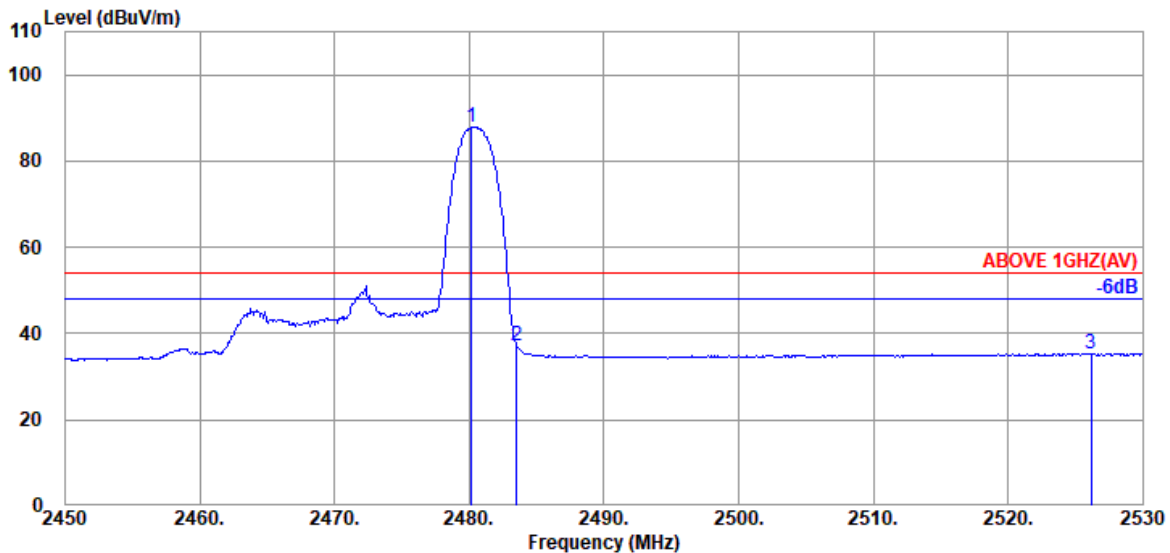


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.160	28.46	5.86	39.92	93.51	87.91	---	---	Average
2483.520	28.47	5.87	39.92	42.82	37.24	54.00	16.76	Average
2526.160	28.67	5.96	39.93	40.68	35.38	54.00	18.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

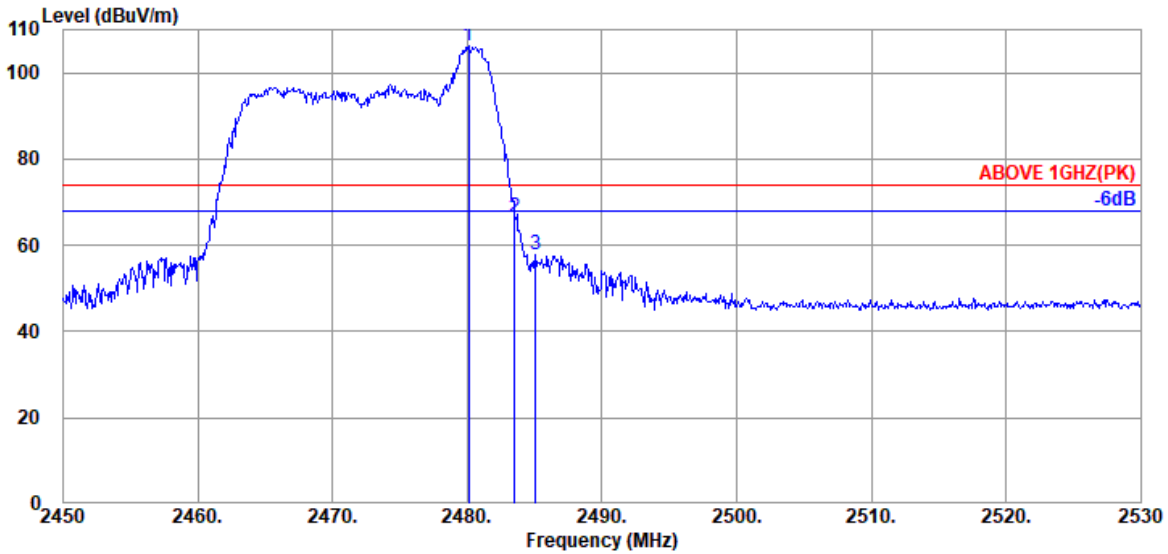

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.080	28.46	5.86	39.92	111.74	106.14	---	---	Peak
2483.520	28.47	5.87	39.92	72.01	66.43	74.00	7.57	Peak
2485.040	28.47	5.87	39.92	63.38	57.80	74.00	16.20	Peak

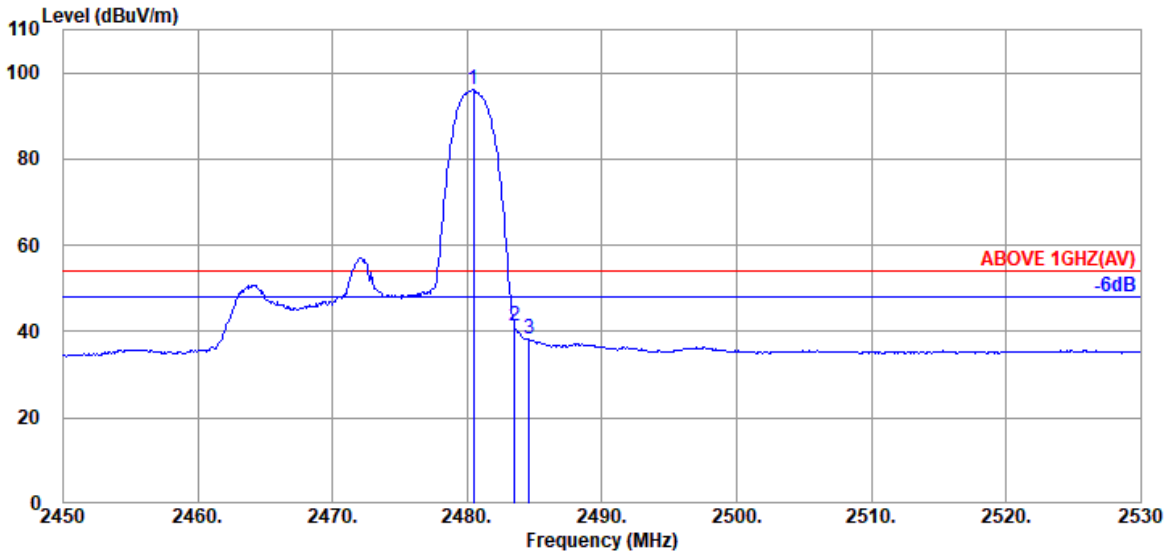


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.480	28.46	5.86	39.92	101.74	96.14	---	---	Average
2483.520	28.47	5.87	39.92	47.02	41.44	54.00	12.56	Average
2484.560	28.47	5.87	39.92	43.72	38.14	54.00	15.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

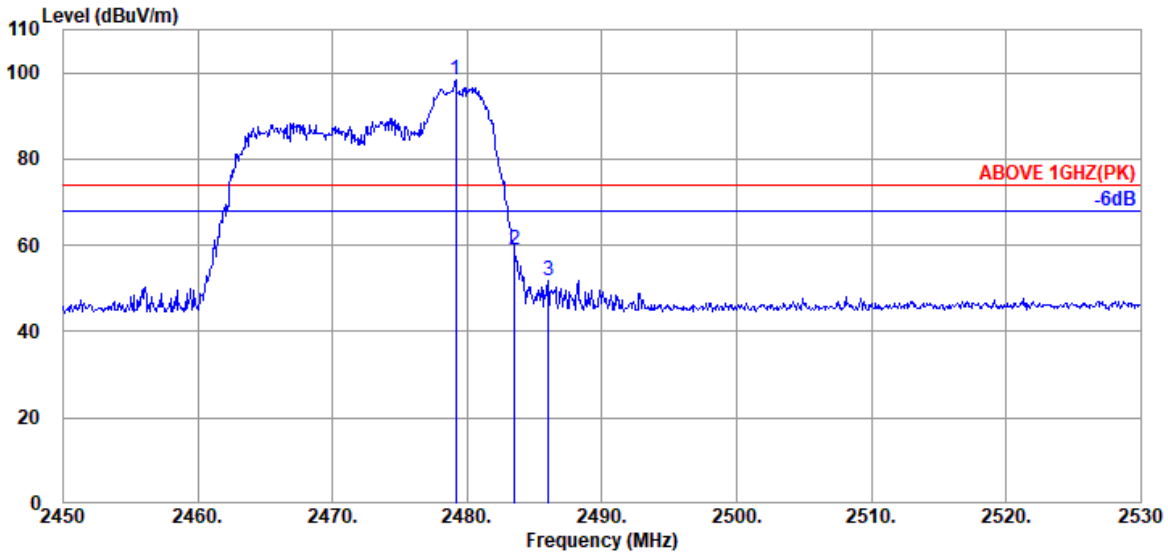

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.120	28.46	5.86	39.92	103.90	98.30	---	---	Peak
2483.520	28.47	5.87	39.92	64.55	58.97	74.00	15.03	Peak
2486.000	28.47	5.87	39.92	57.41	51.83	74.00	22.17	Peak

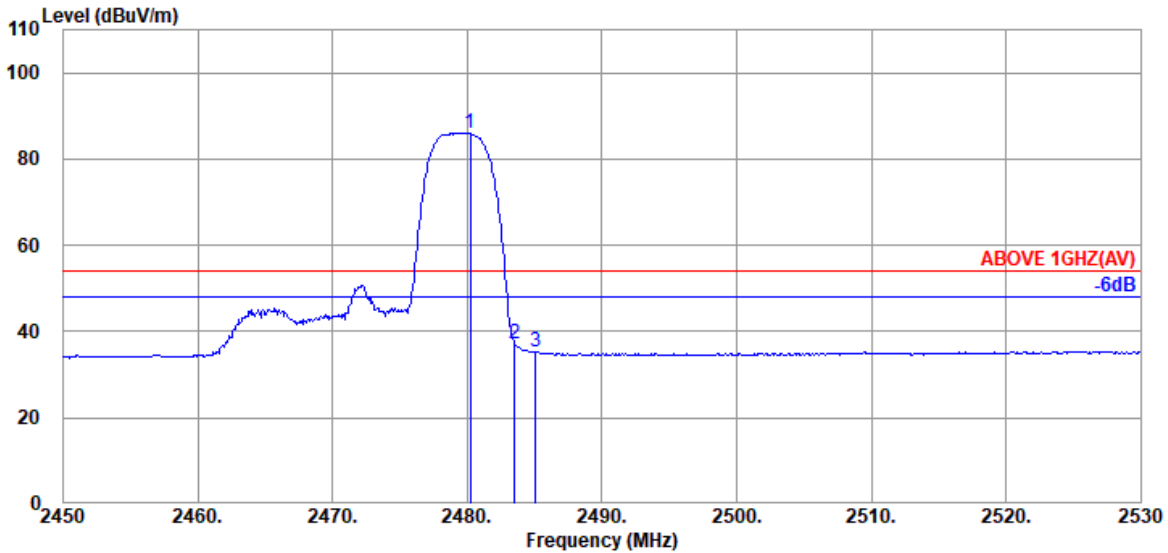


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.240	28.46	5.86	39.92	91.69	86.09	---	---	Average
2483.520	28.47	5.87	39.92	42.88	37.30	54.00	16.70	Average
2485.040	28.47	5.87	39.92	41.04	35.46	54.00	18.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

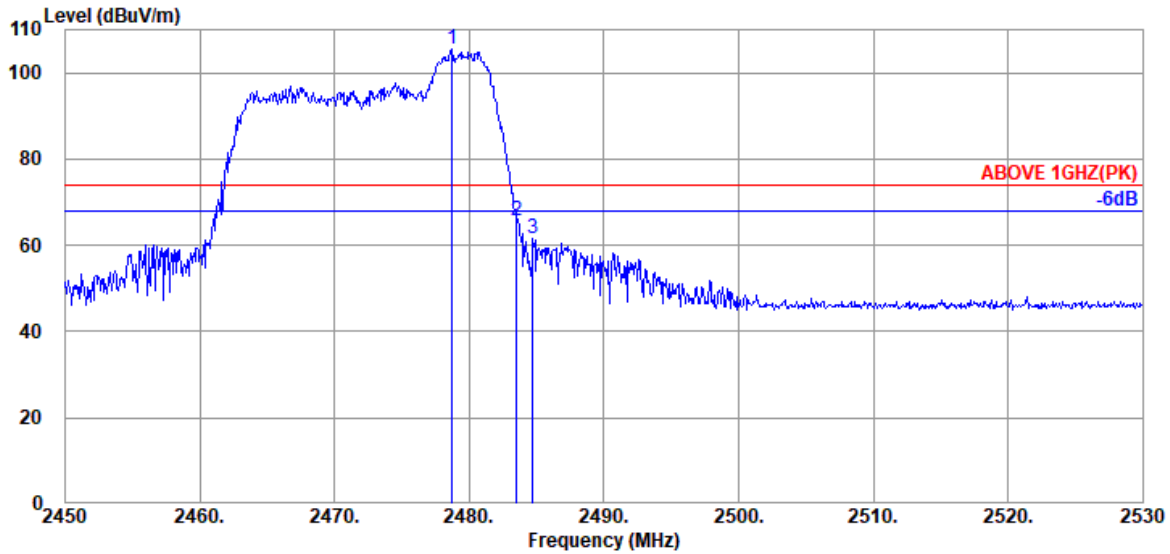

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.720	28.46	5.86	39.92	110.91	105.31	---	---	Peak
2483.520	28.47	5.87	39.92	71.24	65.66	74.00	8.34	Peak
2484.720	28.47	5.87	39.92	67.17	61.59	74.00	12.41	Peak

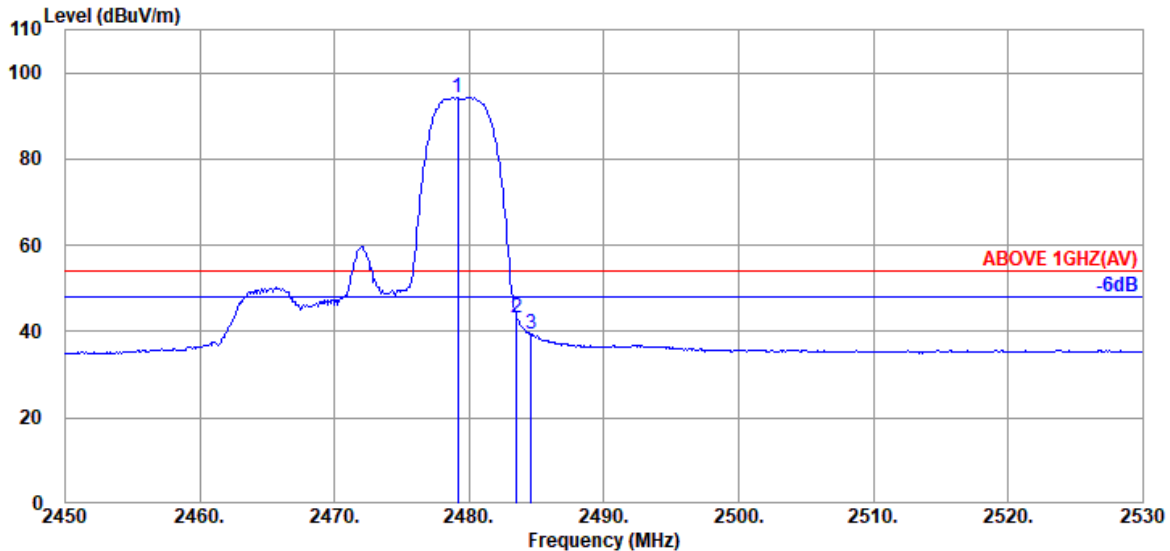

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.120	28.46	5.86	39.92	99.84	94.24	---	---	Average
2483.520	28.47	5.87	39.92	48.75	43.17	54.00	10.83	Average
2484.560	28.47	5.87	39.92	45.18	39.60	54.00	14.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

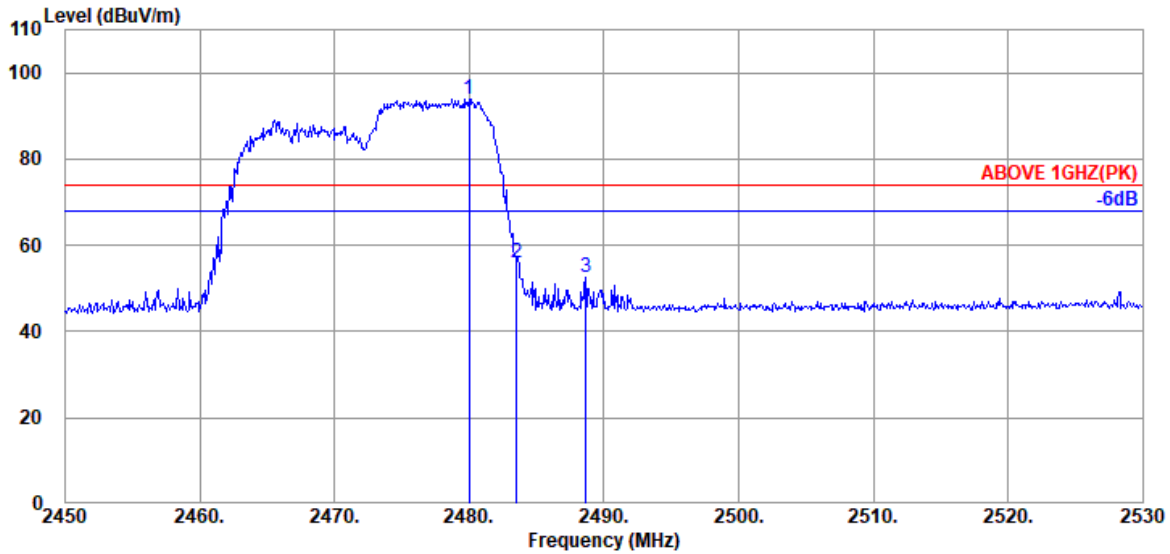

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	99.52	93.92	---	---	Peak
2483.520	28.47	5.87	39.92	61.46	55.88	74.00	18.12	Peak
2488.640	28.47	5.87	39.92	58.22	52.64	74.00	21.36	Peak

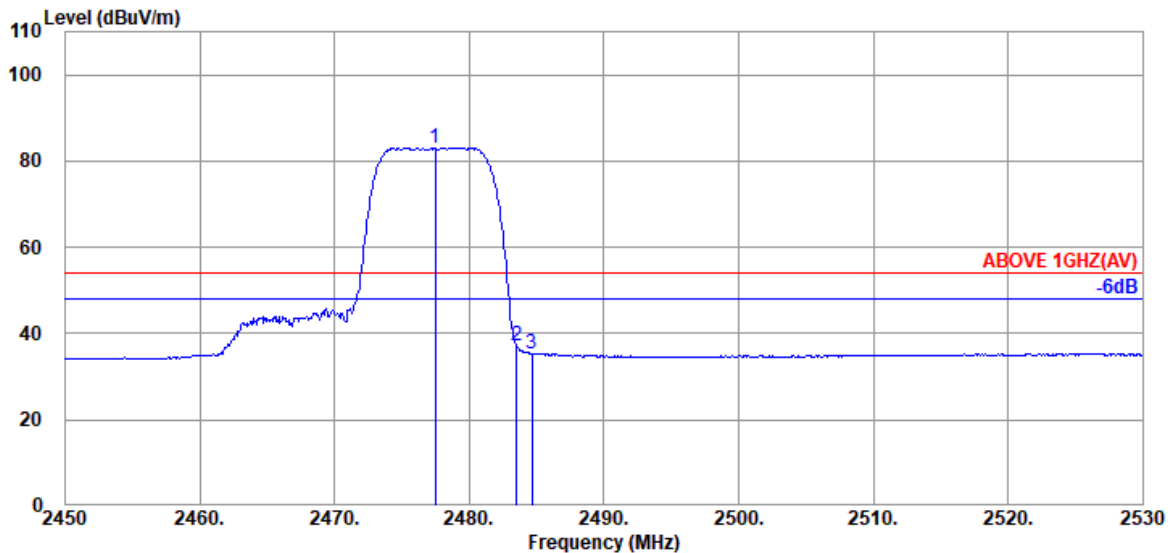


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.440	28.46	5.86	39.92	88.73	83.13	---	---	Average
2483.520	28.47	5.87	39.92	42.83	37.25	54.00	16.75	Average
2484.640	28.47	5.87	39.92	41.05	35.47	54.00	18.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

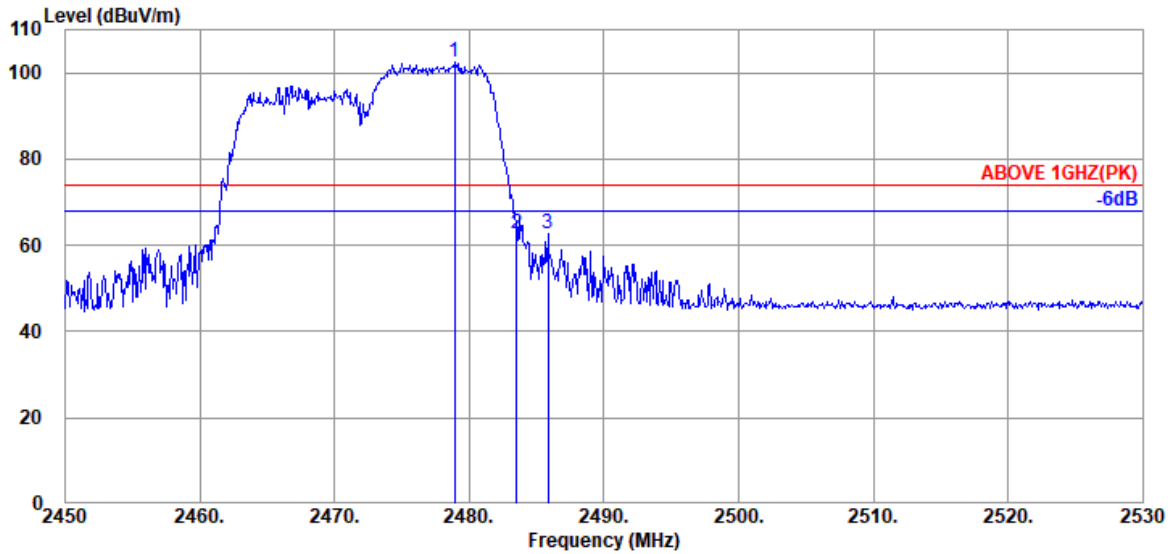

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.880	28.46	5.86	39.92	107.93	102.33	---	---	Peak
2483.520	28.47	5.87	39.92	68.09	62.51	74.00	11.49	Peak
2485.840	28.47	5.87	39.92	68.13	62.55	74.00	11.45	Peak

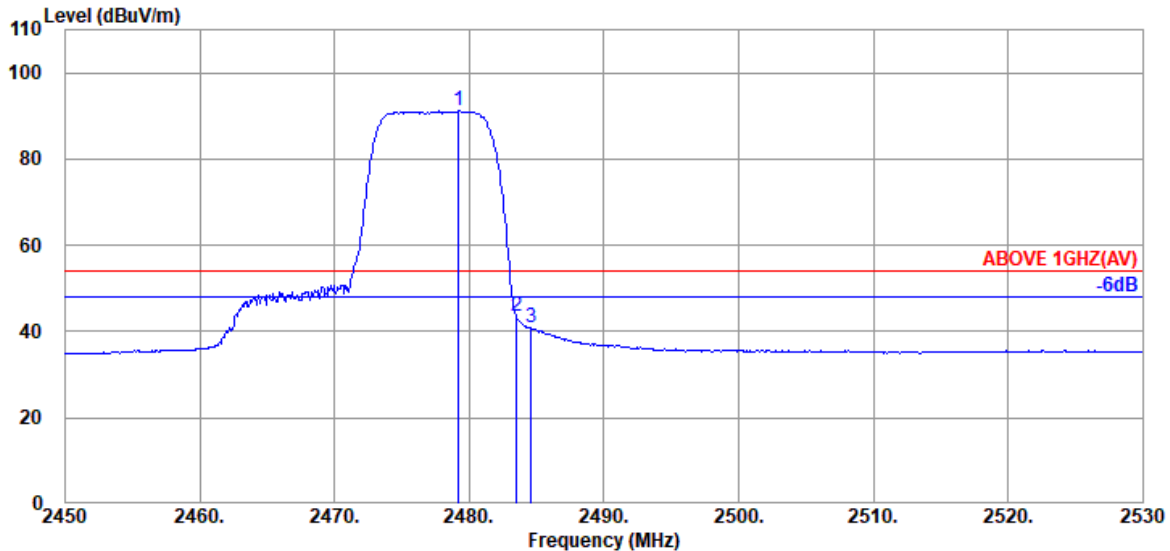


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	5.86	39.92	96.76	91.16	---	---	Average
2483.520	28.47	5.87	39.92	48.97	43.39	54.00	10.61	Average
2484.560	28.47	5.87	39.92	46.36	40.78	54.00	13.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

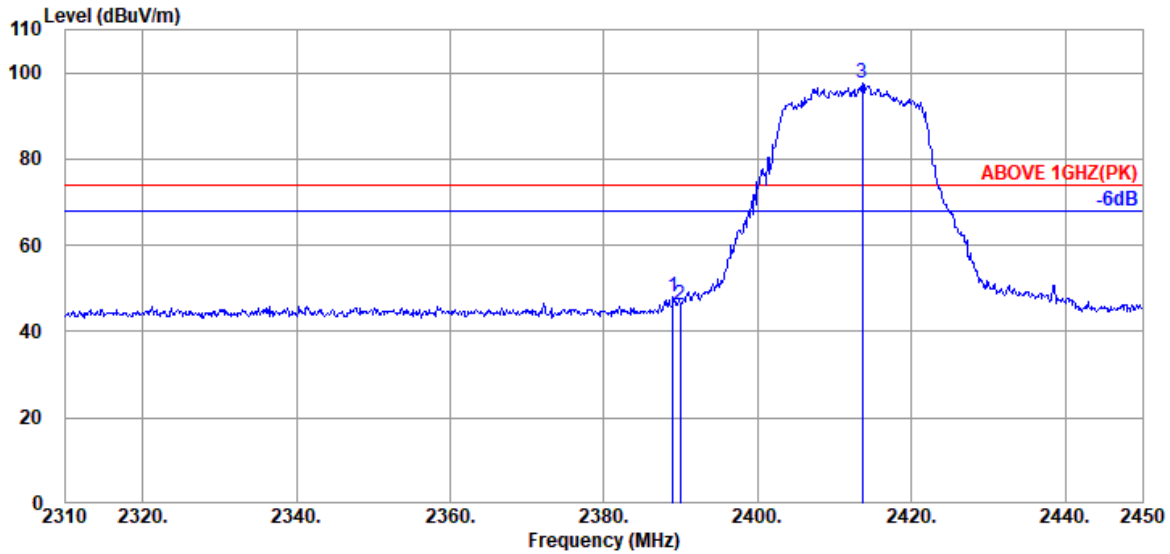

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.21	5.72	39.93	54.00	48.00	74.00	26.00	Peak
2389.940	28.21	5.72	39.93	52.02	46.02	74.00	27.98	Peak
@ 2413.600	28.19	5.76	39.93	103.63	97.65	---	---	Peak

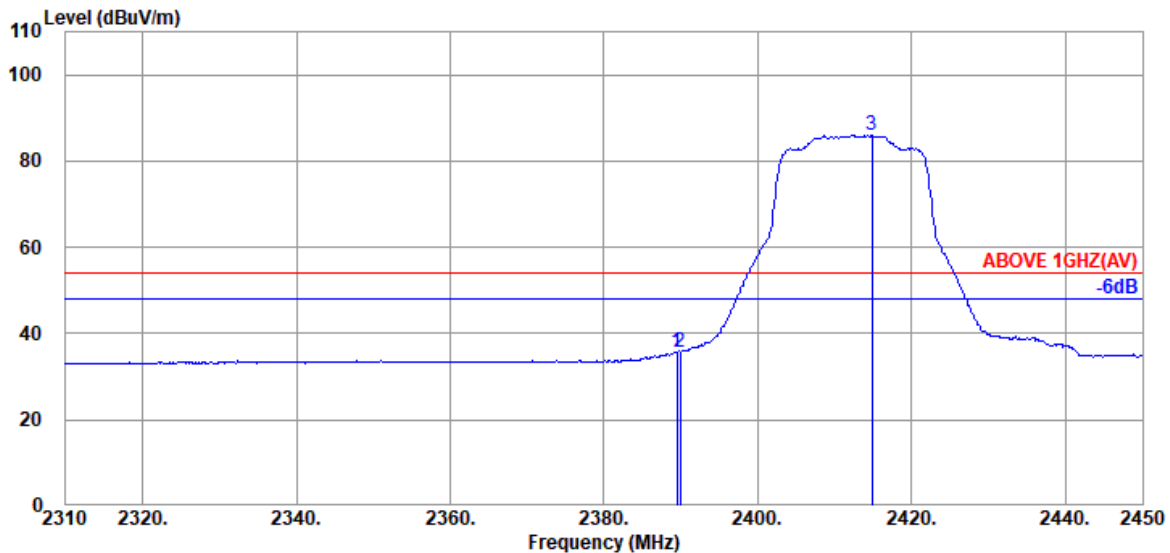


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.21	5.72	39.93	41.63	35.63	54.00	18.37	Average
2389.940	28.21	5.72	39.93	41.68	35.68	54.00	18.32	Average
@ 2414.860	28.19	5.76	39.93	91.97	85.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

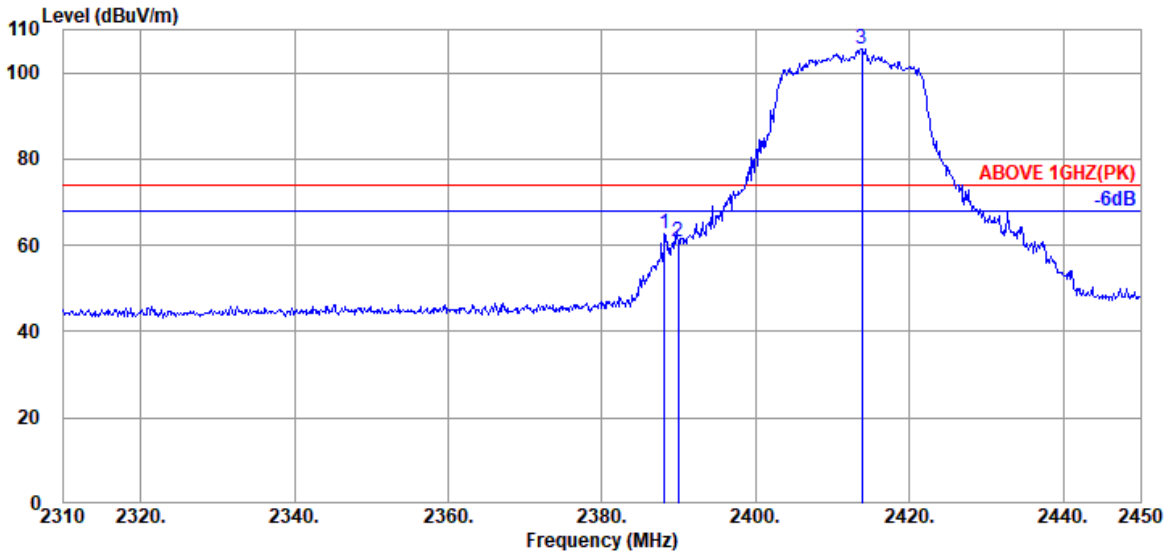

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	28.21	5.72	39.93	68.63	62.63	74.00	11.37	Peak
2389.940	28.21	5.72	39.93	66.76	60.76	74.00	13.24	Peak
@ 2413.740	28.19	5.76	39.93	111.56	105.58	---	---	Peak

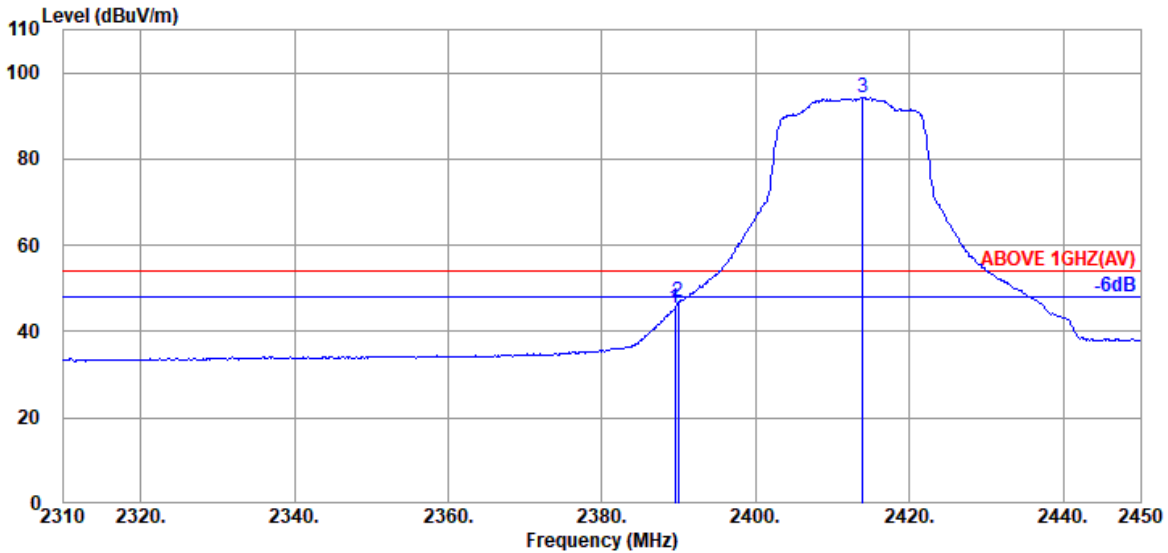


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.21	5.72	39.93	51.51	45.51	54.00	8.49	Average
2389.940	28.21	5.72	39.93	52.78	46.78	54.00	7.22	Average
@ 2413.880	28.19	5.76	39.93	100.21	94.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

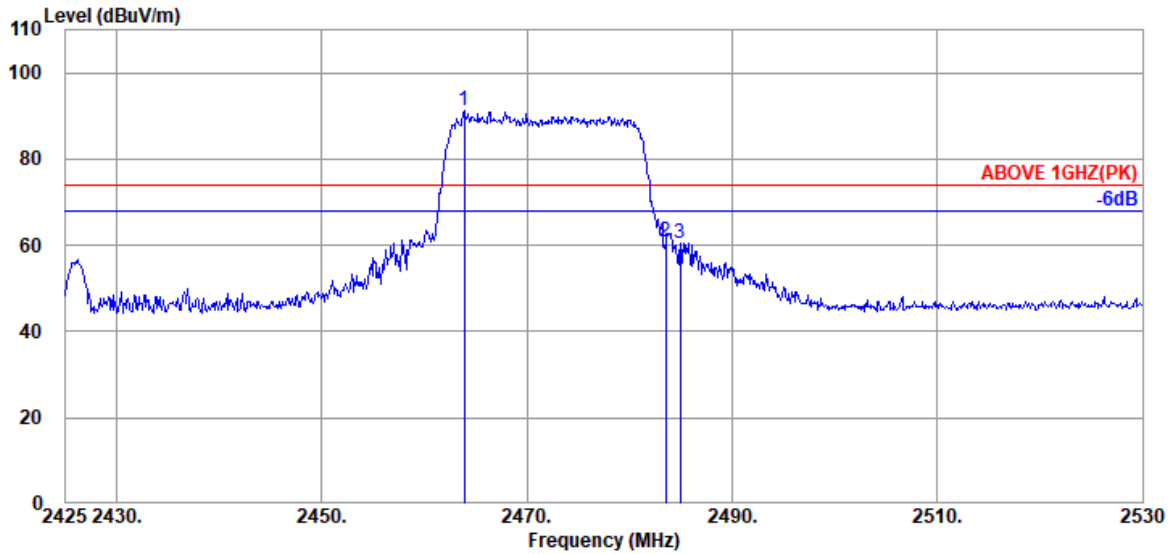

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.43	5.84	39.92	96.99	91.34	---	---	Peak
2483.485	28.47	5.87	39.92	66.28	60.70	74.00	13.30	Peak
2484.955	28.47	5.87	39.92	66.13	60.55	74.00	13.45	Peak

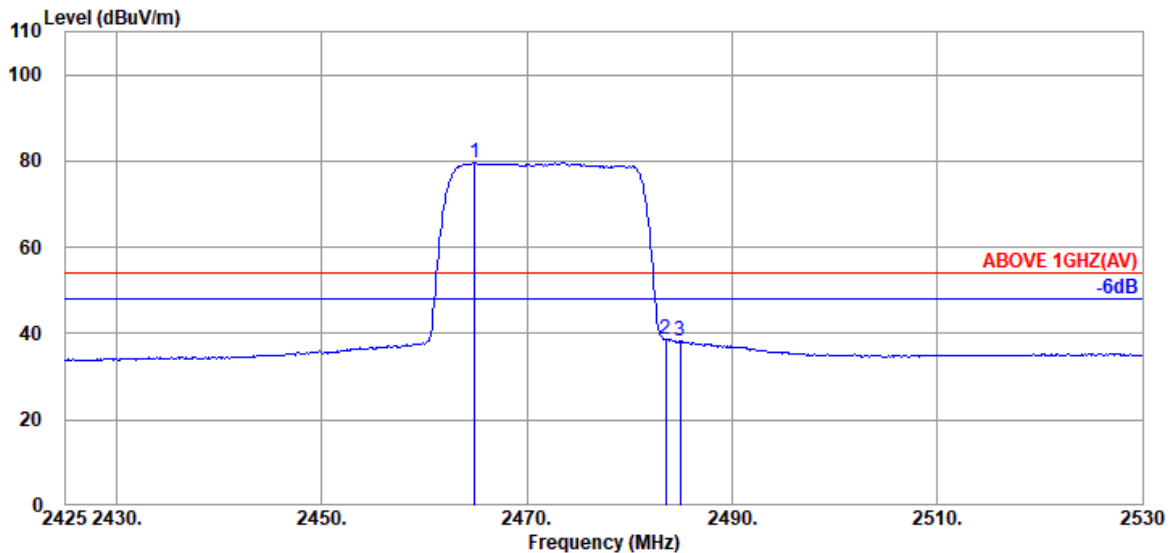


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.43	5.84	39.92	85.24	79.59	---	---	Average
2483.485	28.47	5.87	39.92	44.21	38.63	54.00	15.37	Average
2484.955	28.47	5.87	39.92	43.97	38.39	54.00	15.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

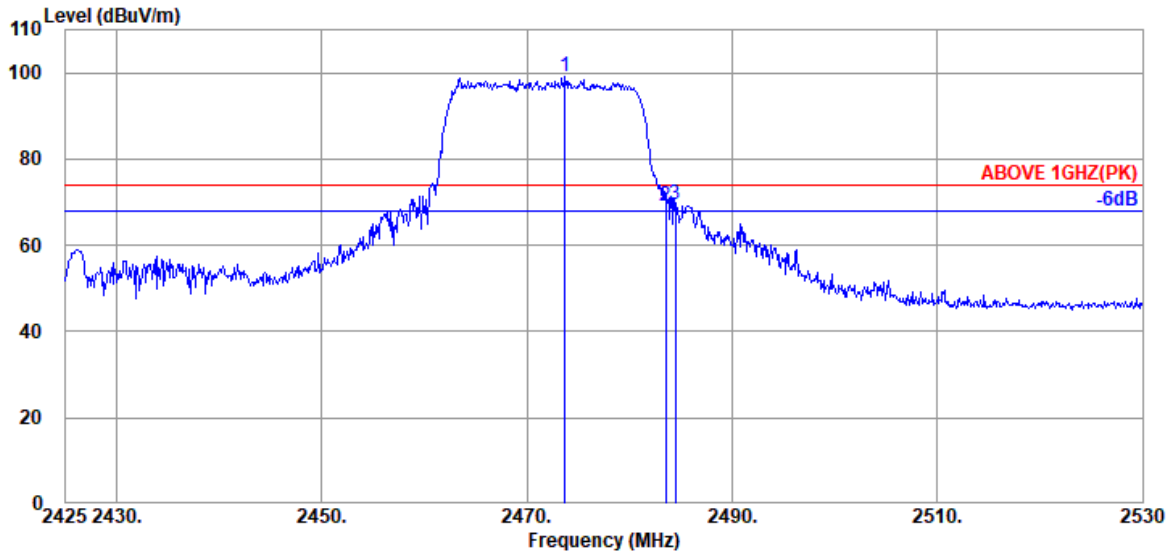

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.720	28.44	5.85	39.92	104.61	98.98	---	---	Peak
2483.485	28.47	5.87	39.92	74.55	68.97	74.00	5.03	Peak
2484.430	28.47	5.87	39.92	75.14	69.56	74.00	4.44	Peak

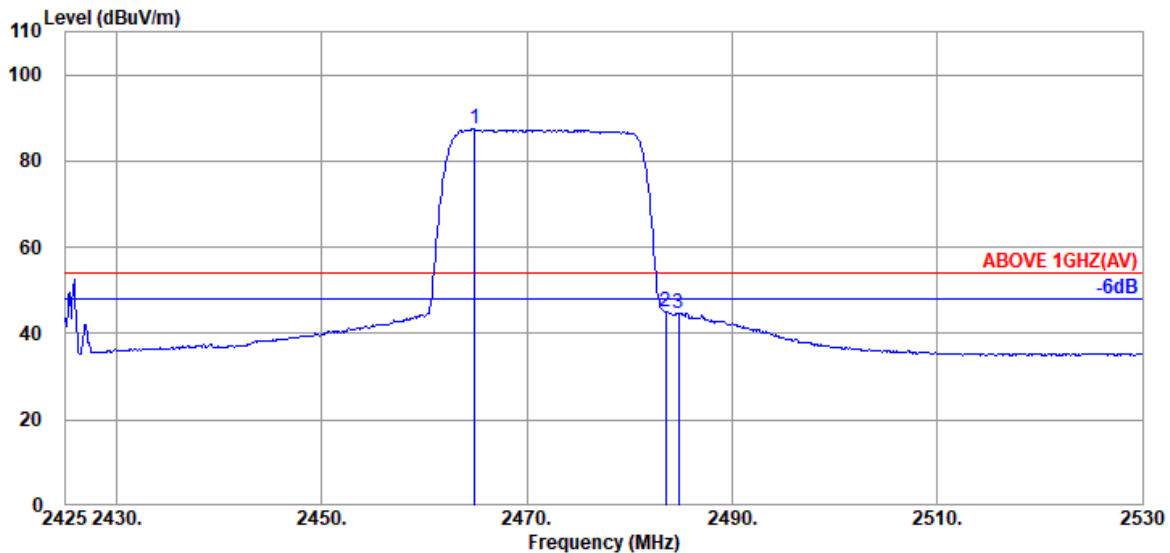


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.43	5.84	39.92	93.21	87.56	---	---	Average
2483.485	28.47	5.87	39.92	50.47	44.89	54.00	9.11	Average
2484.745	28.47	5.87	39.92	50.27	44.69	54.00	9.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	BLE (1Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

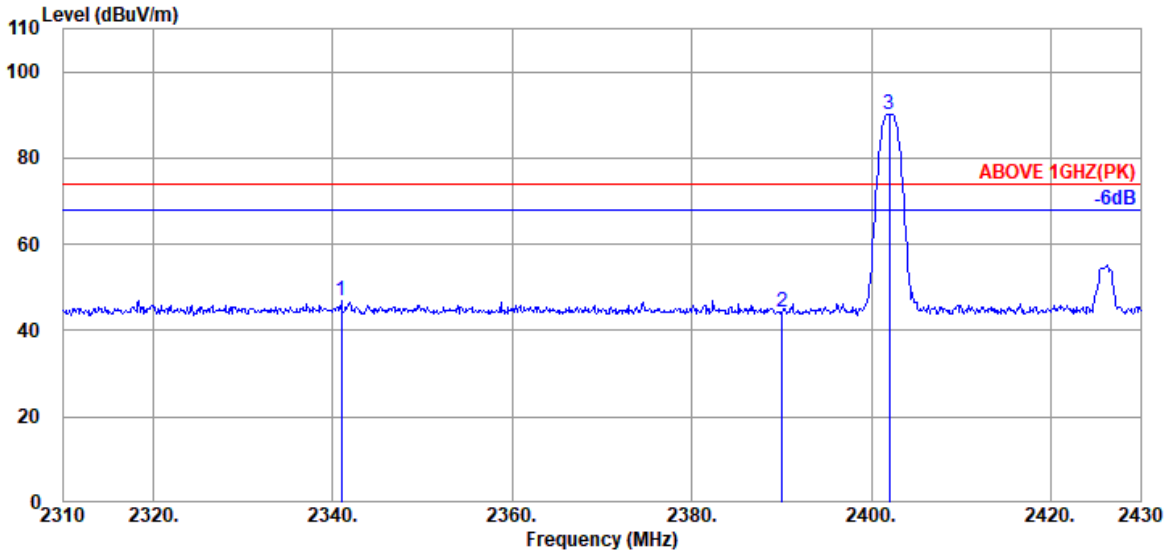

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2340.960	28.40	5.64	39.93	52.78	46.89	74.00	27.11	Peak
2390.040	28.21	5.72	39.93	50.22	44.22	74.00	29.78	Peak
@ 2402.040	28.10	5.74	39.93	96.17	90.08	---	---	Peak

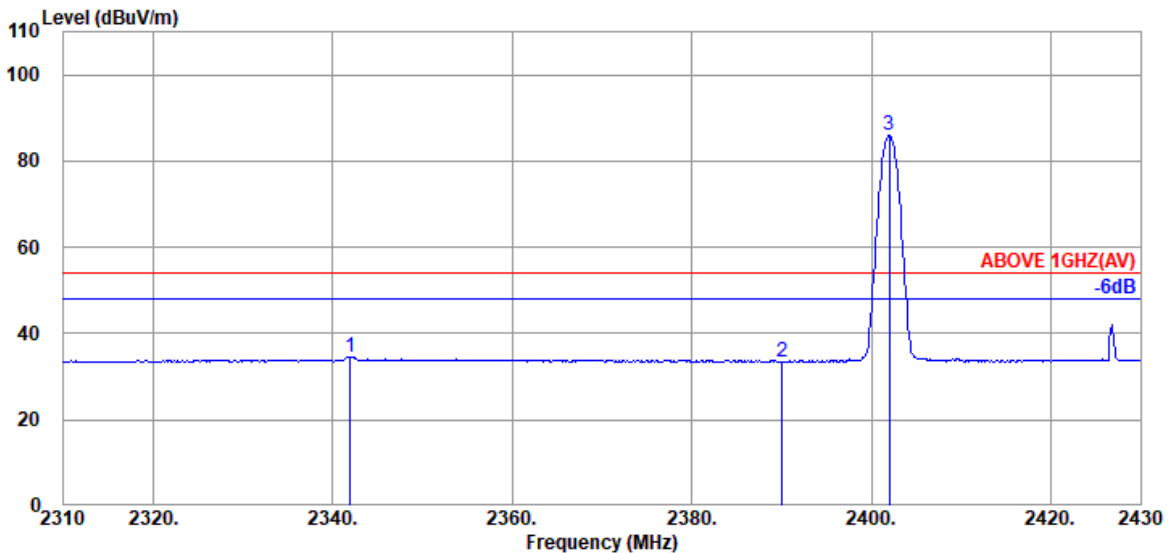


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.920	28.40	5.64	39.93	40.58	34.69	54.00	19.31	Average
2390.040	28.21	5.72	39.93	39.54	33.54	54.00	20.46	Average
@ 2402.040	28.10	5.74	39.93	92.17	86.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

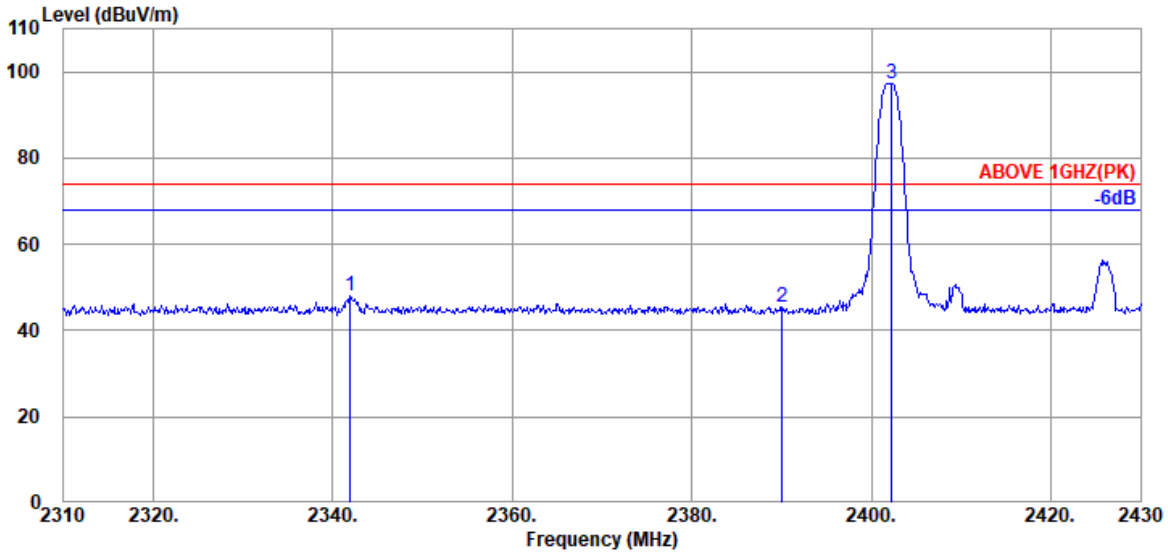

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.920	28.40	5.64	39.93	53.82	47.93	74.00	26.07	Peak
2390.040	28.21	5.72	39.93	51.26	45.26	74.00	28.74	Peak
@ 2402.280	28.10	5.74	39.93	103.40	97.31	---	---	Peak

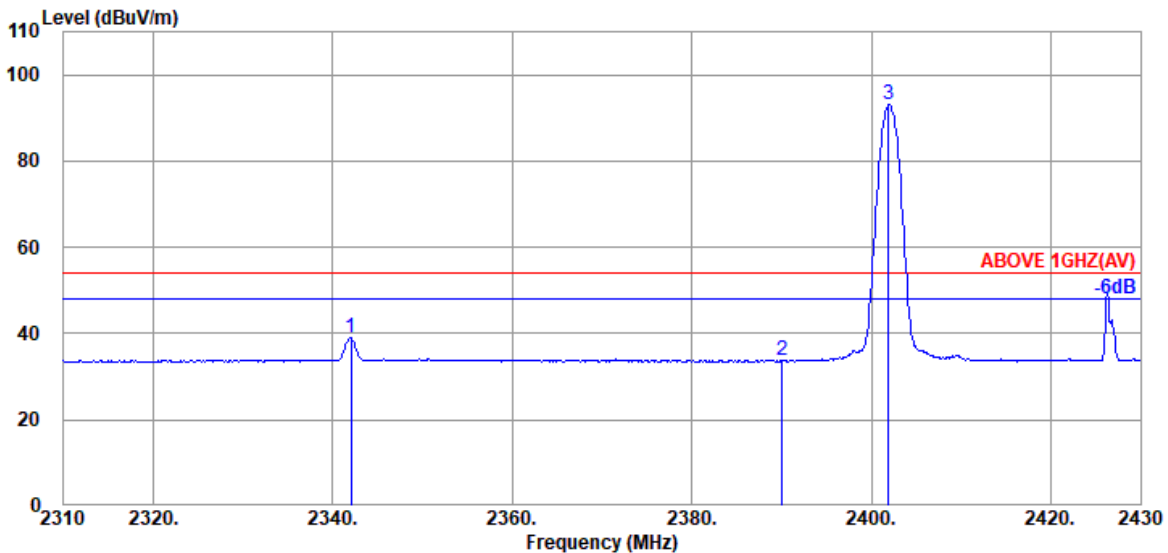


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.040	28.40	5.64	39.93	44.86	38.97	54.00	15.03	Average
2390.040	28.21	5.72	39.93	39.61	33.61	54.00	20.39	Average
@ 2401.920	28.10	5.74	39.93	99.09	93.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

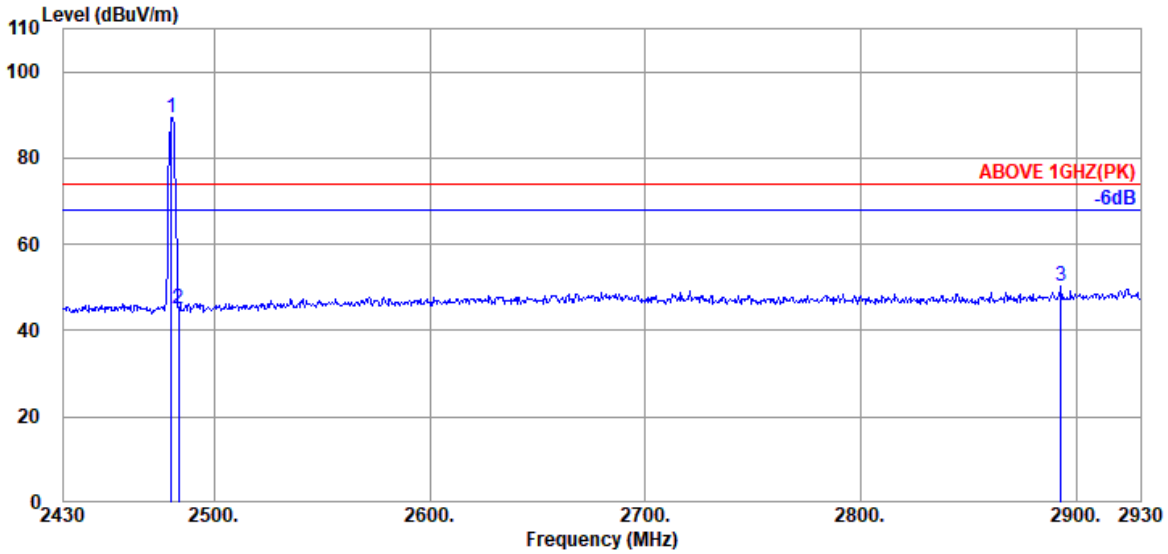

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	94.80	89.20	---	---	Peak
2483.500	28.47	5.87	39.92	50.54	44.96	74.00	29.04	Peak
2893.000	29.70	6.79	40.03	53.72	50.18	74.00	23.82	Peak

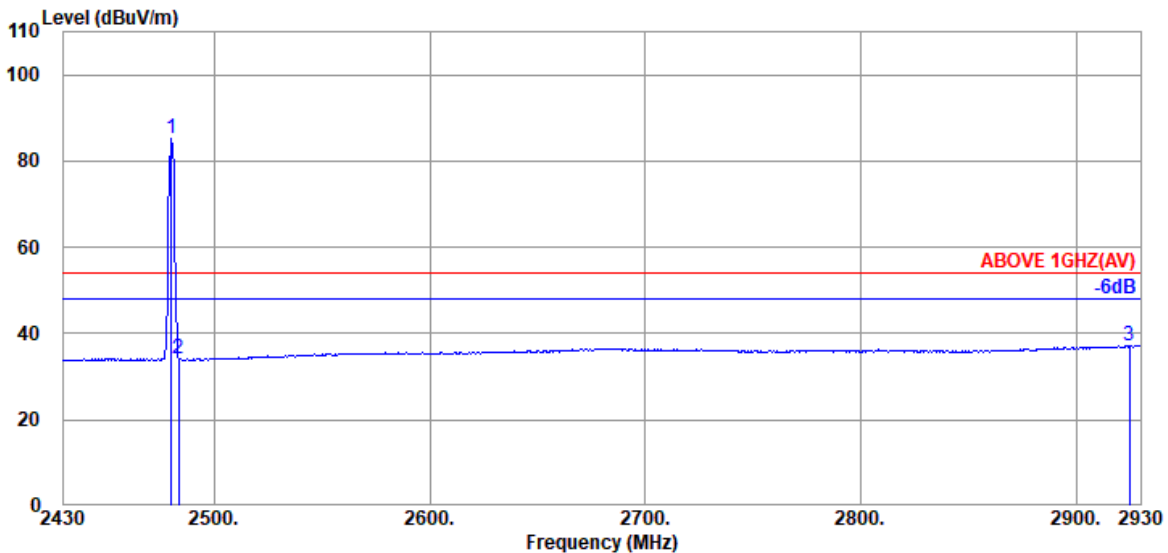


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	90.78	85.18	---	---	Average
2483.500	28.47	5.87	39.92	39.84	34.26	54.00	19.74	Average
2925.000	29.95	6.84	40.04	40.45	37.20	54.00	16.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

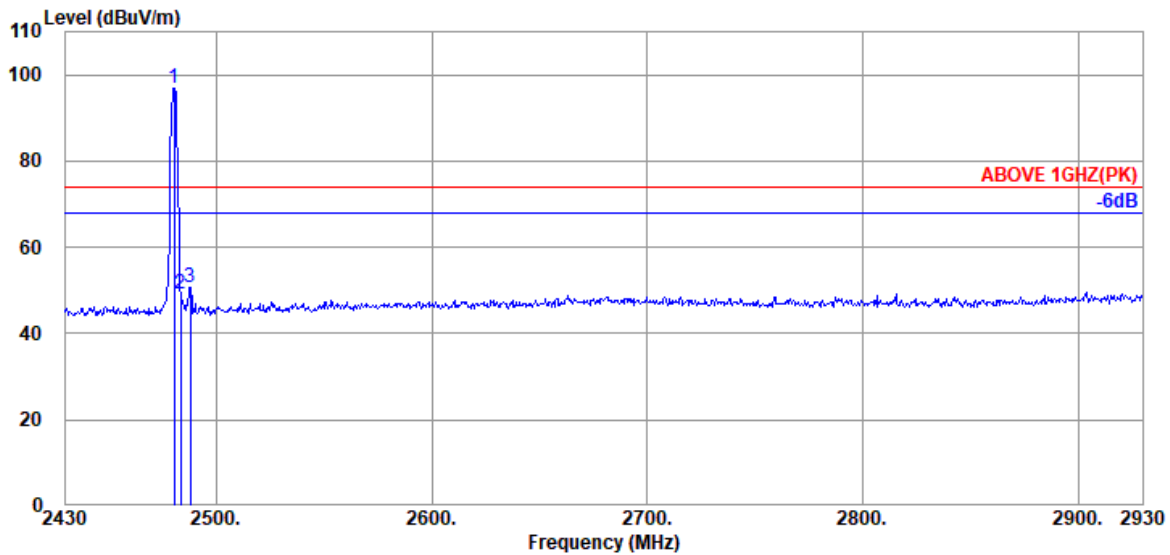

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.46	5.86	39.92	102.40	96.80	---	---	Peak
	2483.500	28.47	5.87	39.92	54.93	49.35	74.00	24.65	Peak
	2488.000	28.47	5.87	39.92	56.26	50.68	74.00	23.32	Peak

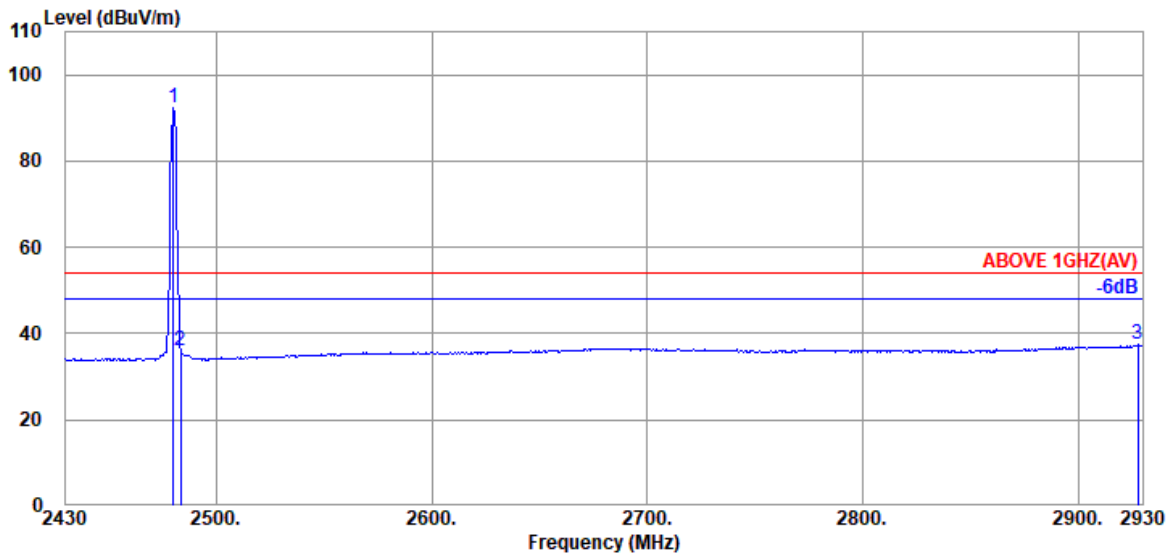


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.46	5.86	39.92	98.07	92.47	---	---	Average
	2483.500	28.47	5.87	39.92	41.80	36.22	54.00	17.78	Average
	2928.000	30.03	6.86	40.04	40.53	37.38	54.00	16.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

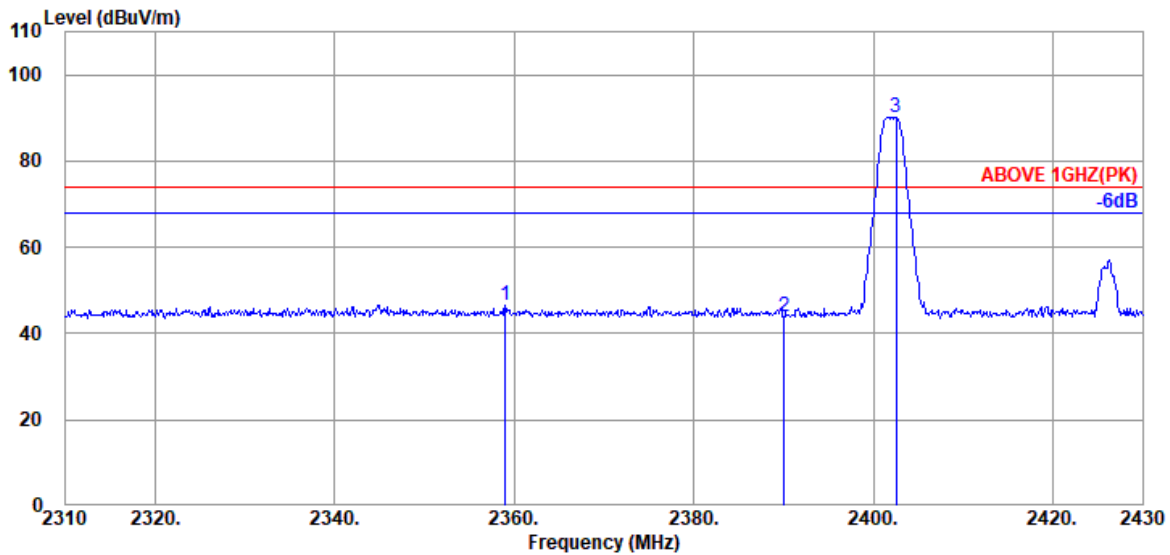

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.960	28.44	5.67	39.93	52.49	46.67	74.00	27.33	Peak
2390.040	28.21	5.72	39.93	50.07	44.07	74.00	29.93	Peak
@ 2402.520	28.10	5.74	39.93	96.22	90.13	---	---	Peak

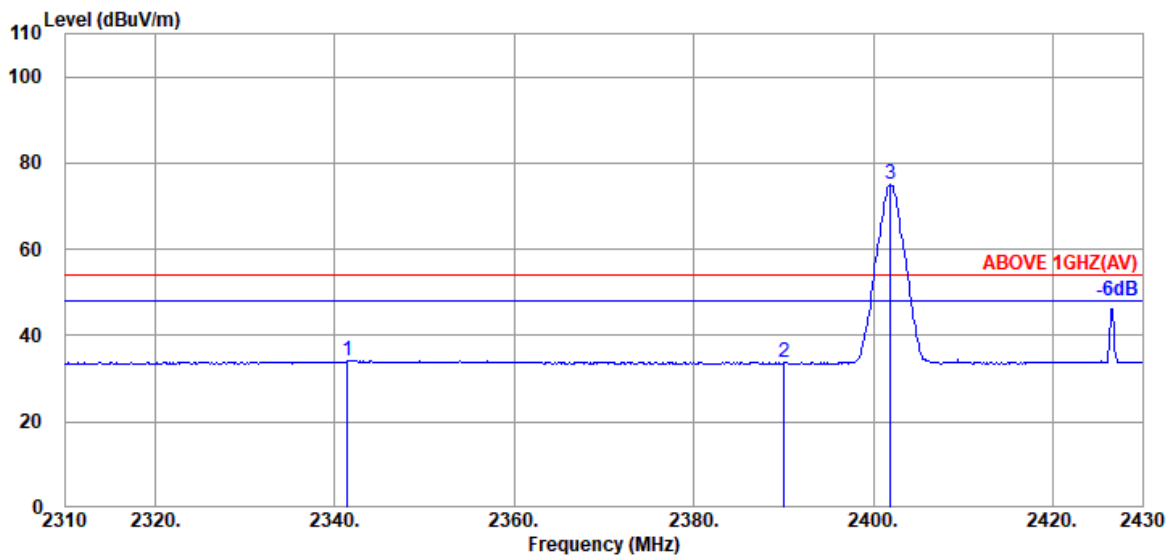


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.440	28.40	5.64	39.93	40.17	34.28	54.00	19.72	Average
2390.040	28.21	5.72	39.93	39.60	33.60	54.00	20.40	Average
@ 2401.920	28.10	5.74	39.93	81.27	75.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

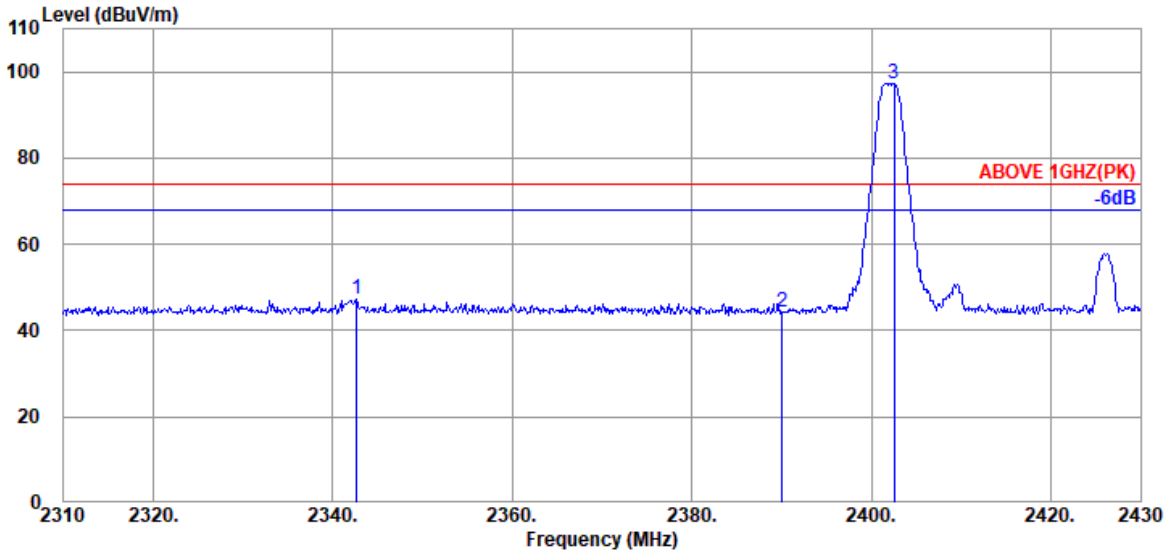

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.640	28.45	5.65	39.93	53.22	47.39	74.00	26.61	Peak
2390.040	28.21	5.72	39.93	50.27	44.27	74.00	29.73	Peak
@ 2402.520	28.10	5.74	39.93	103.29	97.20	---	---	Peak

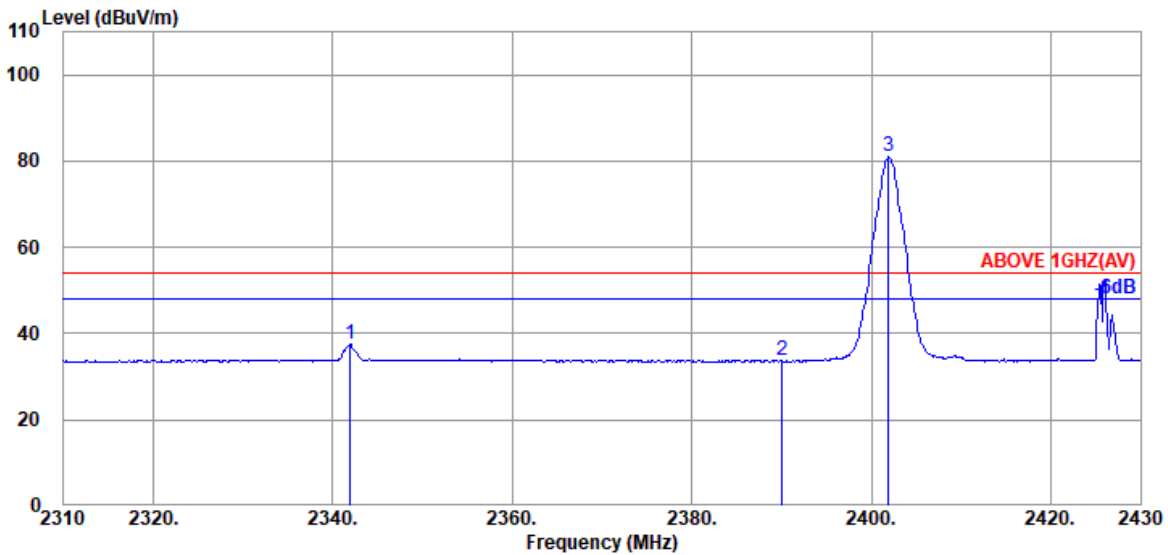


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.920	28.40	5.64	39.93	43.33	37.44	54.00	16.56	Average
2390.040	28.21	5.72	39.93	39.63	33.63	54.00	20.37	Average
@ 2401.920	28.10	5.74	39.93	87.02	80.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

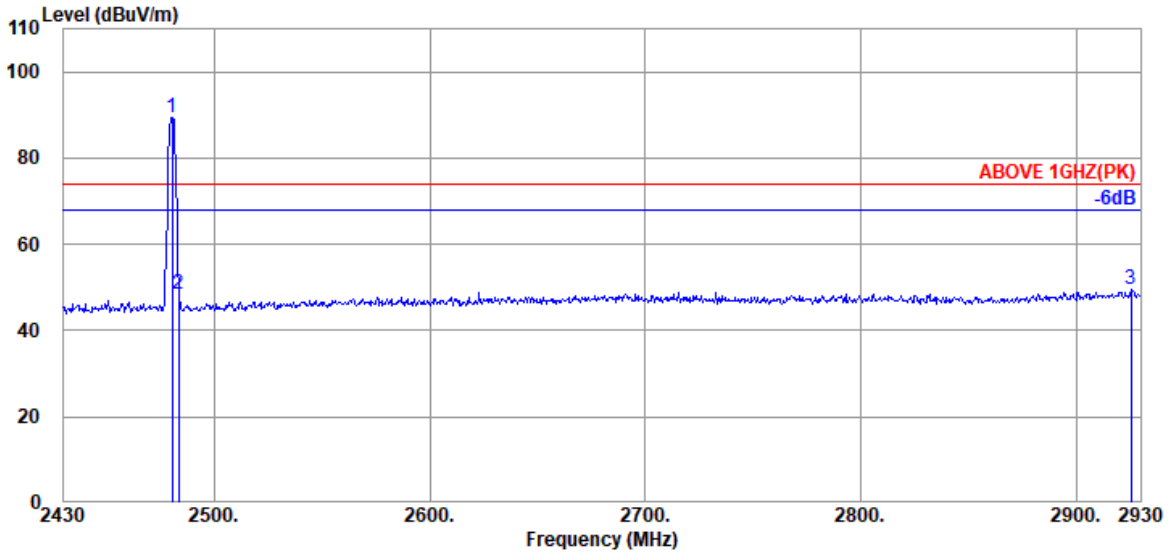

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.46	5.86	39.92	94.81	89.21	---	---	Peak
	2483.500	28.47	5.87	39.92	54.10	48.52	74.00	25.48	Peak
	2925.500	29.95	6.84	40.04	52.75	49.50	74.00	24.50	Peak

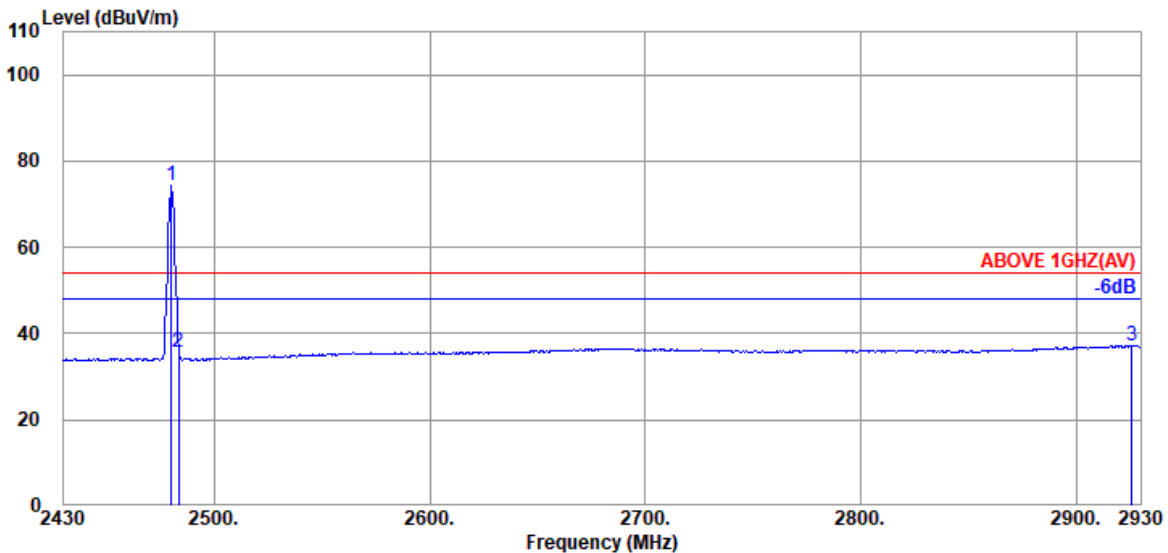


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.46	5.86	39.92	79.93	74.33	---	---	Average
	2483.500	28.47	5.87	39.92	41.15	35.57	54.00	18.43	Average
	2926.000	29.95	6.84	40.04	40.47	37.22	54.00	16.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

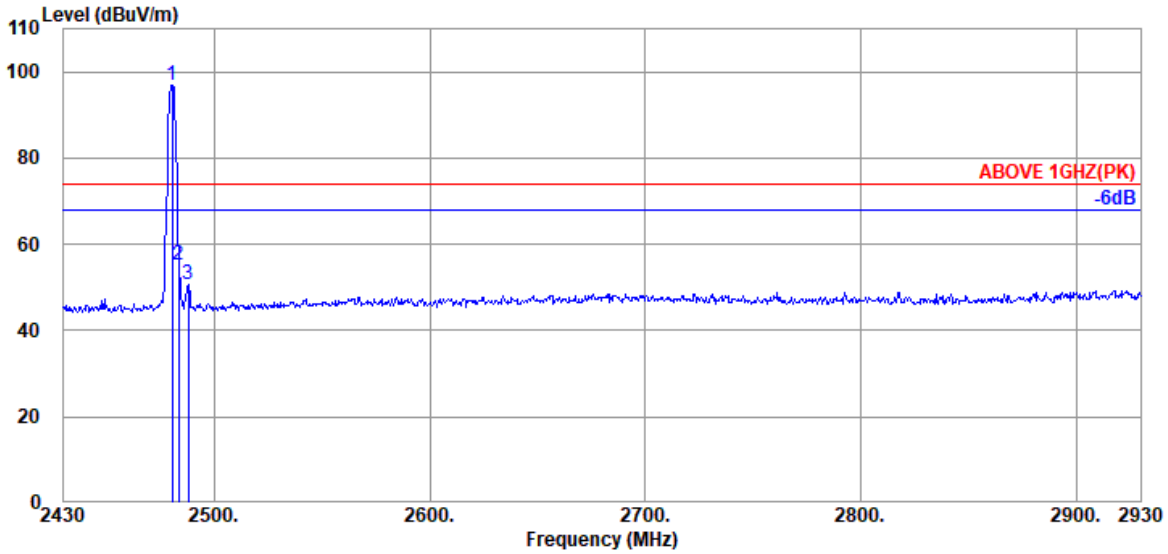

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.46	5.86	39.92	102.30	96.70	---	---	Peak
	2483.500	28.47	5.87	39.92	60.82	55.24	74.00	18.76	Peak
	2488.000	28.47	5.87	39.92	56.26	50.68	74.00	23.32	Peak

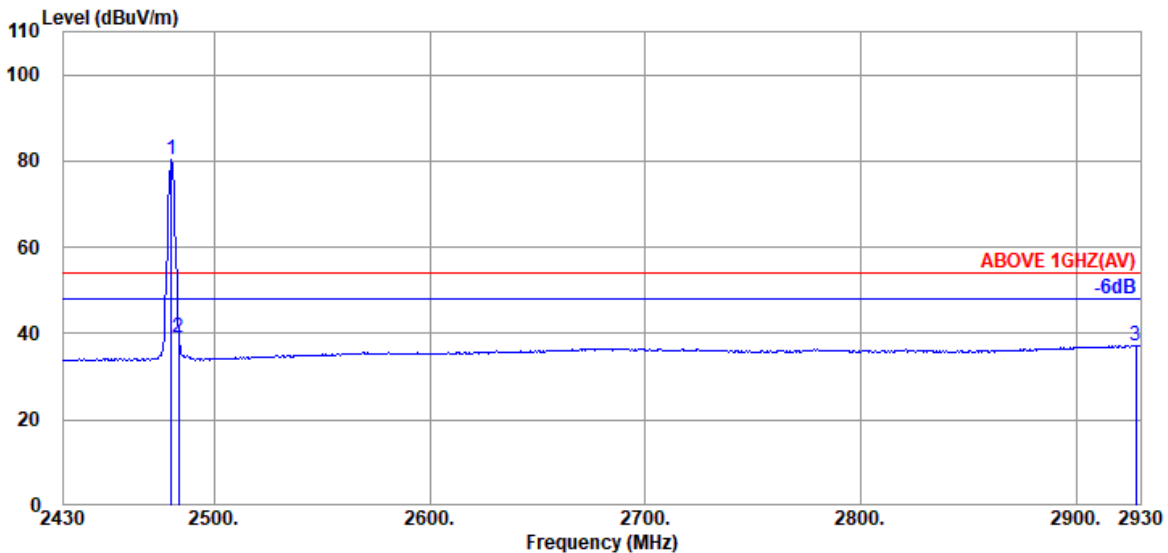

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.46	5.86	39.92	86.05	80.45	---	---	Average
	2483.500	28.47	5.87	39.92	44.58	39.00	54.00	15.00	Average
	2928.000	30.03	6.86	40.04	40.37	37.22	54.00	16.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..




● Test SKU #2 (with LUXSHARE-ICT Antenna and PM main board)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

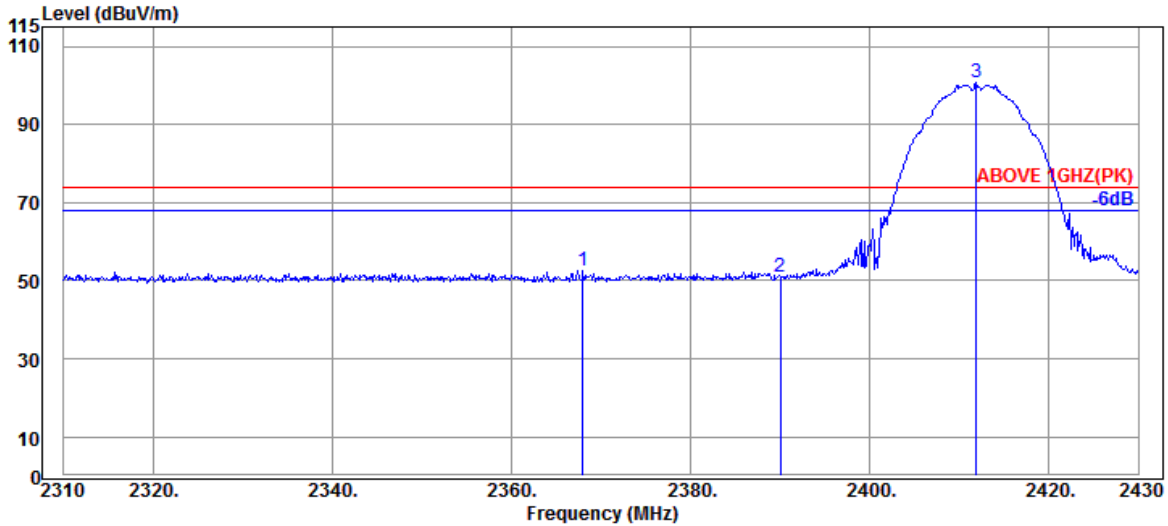

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2367.960	32.00	5.69	34.50	49.50	52.69	74.00	21.31	Peak
2390.040	32.00	5.72	34.51	47.71	50.92	74.00	23.08	Peak
@ 2411.880	32.00	5.76	34.51	97.72	100.97	---	---	Peak

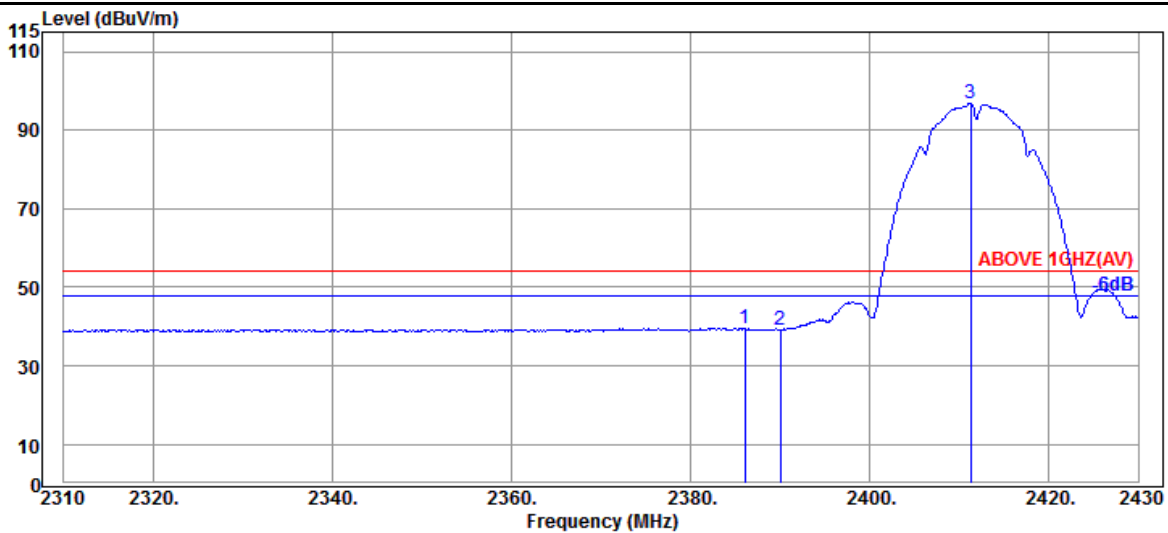


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.080	32.00	5.72	34.51	36.38	39.59	54.00	14.41	Average
2390.040	32.00	5.72	34.51	36.11	39.32	54.00	14.68	Average
@ 2411.280	32.00	5.76	34.51	93.67	96.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

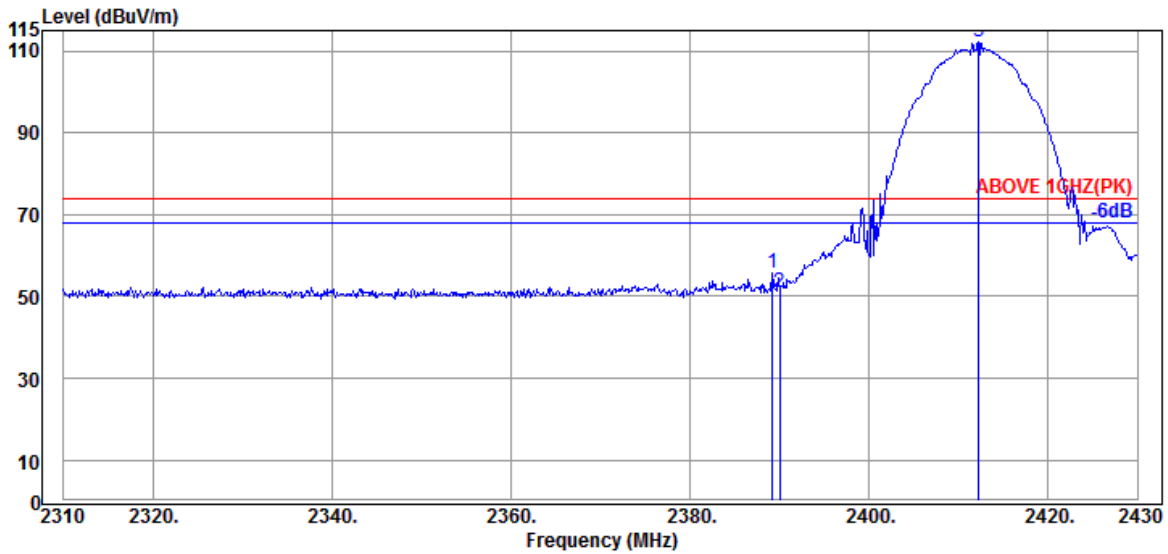

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	52.42	55.63	74.00	18.37	Peak
2390.040	32.00	5.72	34.51	47.87	51.08	74.00	22.92	Peak
@ 2412.240	32.00	5.76	34.51	108.79	112.04	74.00	---	Peak

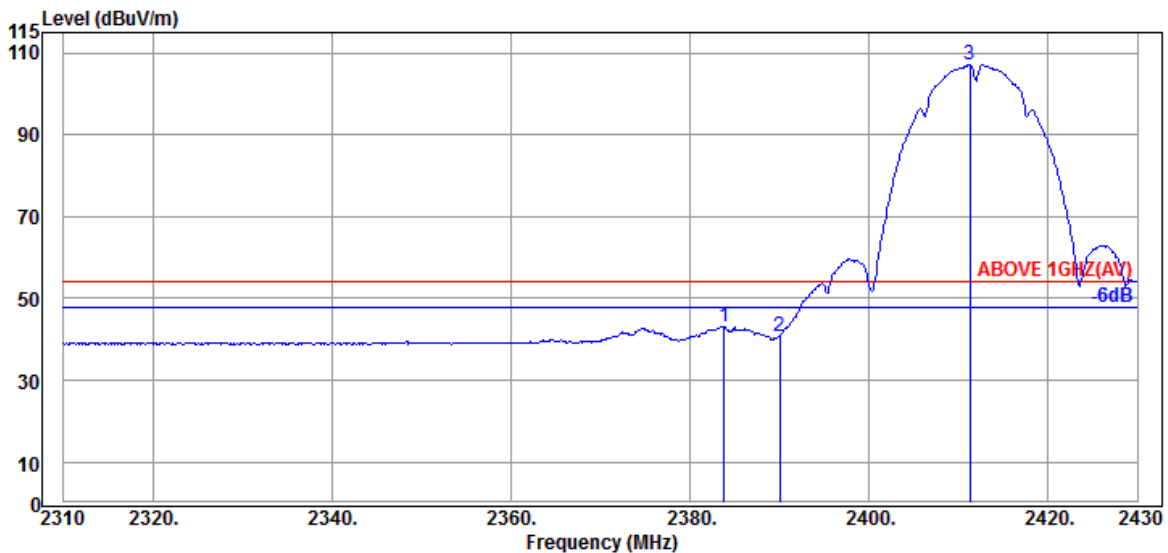


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.800	32.00	5.72	34.51	40.01	43.22	54.00	10.78	Average
2390.040	32.00	5.72	34.51	37.54	40.75	54.00	13.25	Average
@ 2411.280	32.00	5.76	34.51	103.99	107.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

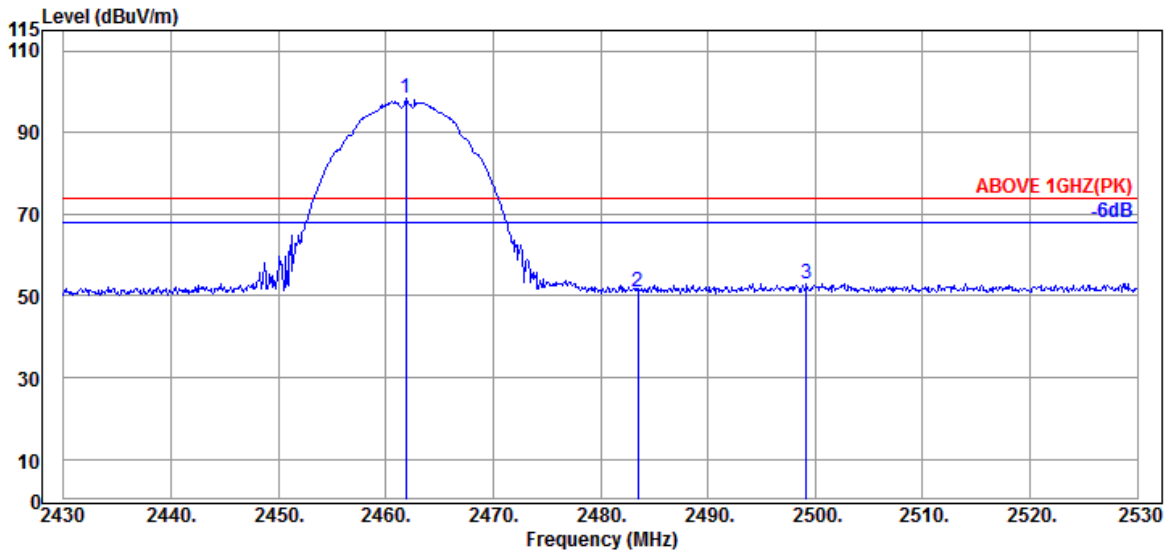

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.900	32.17	5.84	34.52	94.87	98.36	---	---	Peak
2483.500	32.43	5.87	34.53	47.35	51.12	74.00	22.88	Peak
2499.200	32.60	5.89	34.53	49.14	53.10	74.00	20.90	Peak

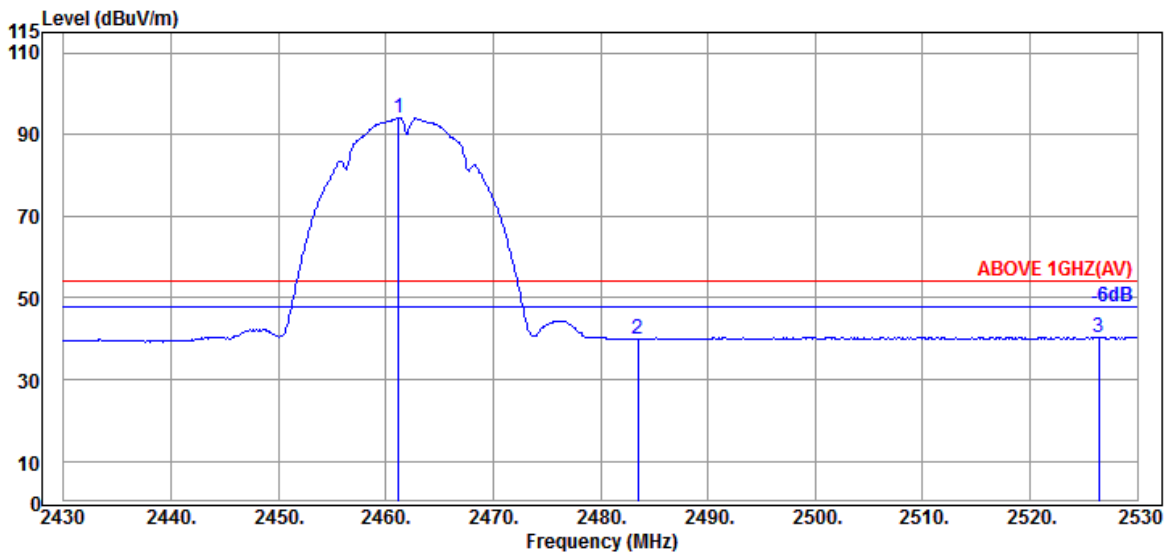


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.17	5.84	34.52	90.66	94.15	---	---	Average
2483.500	32.43	5.87	34.53	36.16	39.93	54.00	14.07	Average
2526.400	32.49	5.96	34.54	36.48	40.39	54.00	13.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

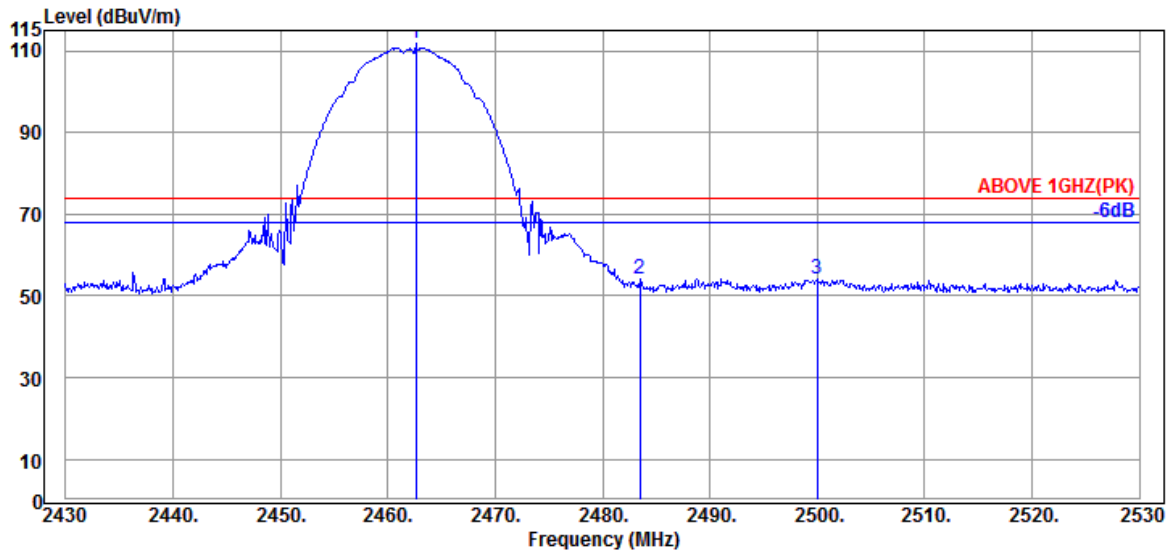

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.600	32.17	5.84	34.52	108.26	111.75	---	---	Peak
2483.500	32.43	5.87	34.53	50.25	54.02	74.00	19.98	Peak
2500.000	32.60	5.89	34.53	50.31	54.27	74.00	19.73	Peak

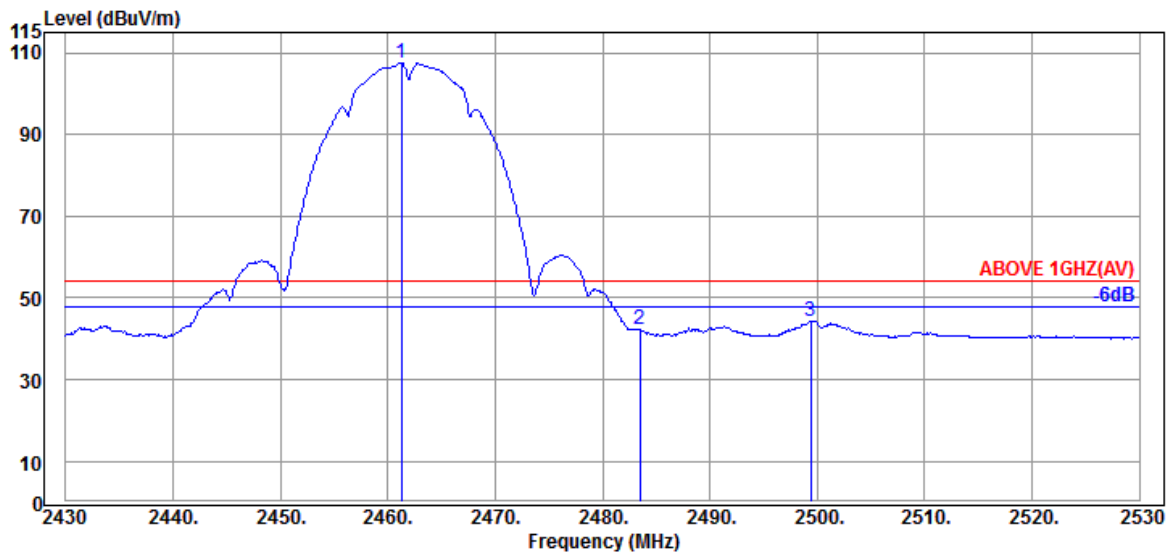


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	32.17	5.84	34.52	104.12	107.61	---	---	Average
2483.500	32.43	5.87	34.53	38.36	42.13	54.00	11.87	Average
2499.400	32.60	5.89	34.53	40.47	44.43	54.00	9.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

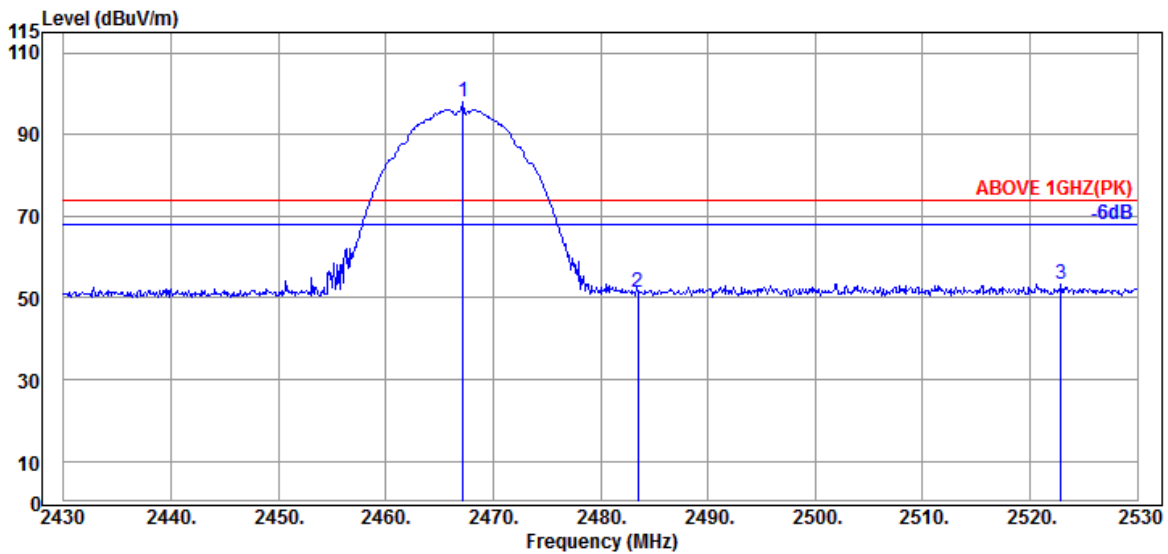

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.200	32.17	5.84	34.52	94.61	98.10	---	---	Peak
2483.500	32.43	5.87	34.53	47.75	51.52	74.00	22.48	Peak
2522.900	32.51	5.94	34.53	49.49	53.41	74.00	20.59	Peak

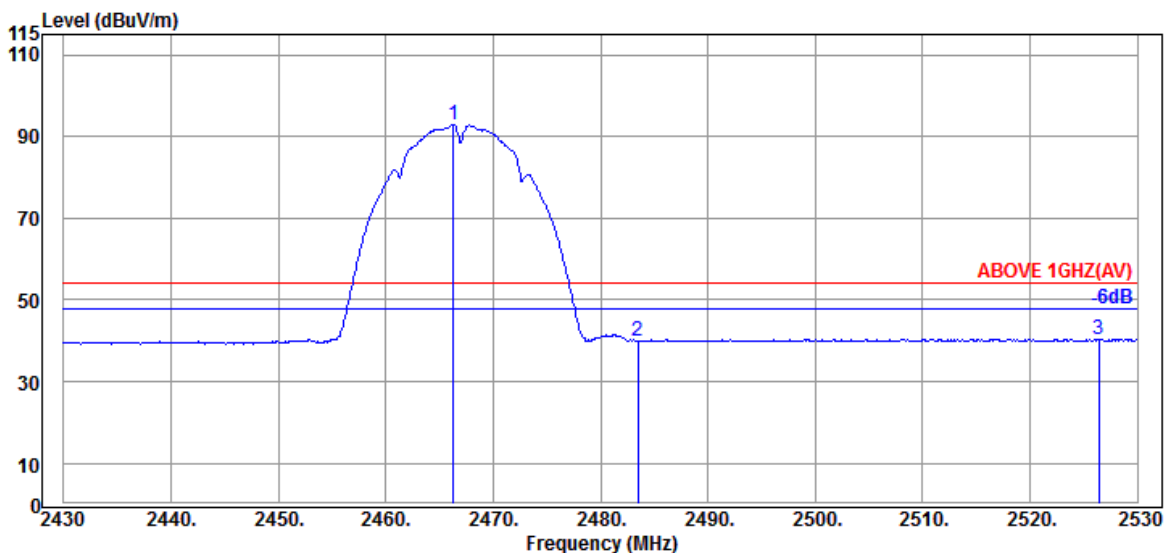


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	32.17	5.84	34.52	89.39	92.88	---	---	Average
2483.500	32.43	5.87	34.53	36.16	39.93	54.00	14.07	Average
2526.400	32.49	5.96	34.54	36.47	40.38	54.00	13.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

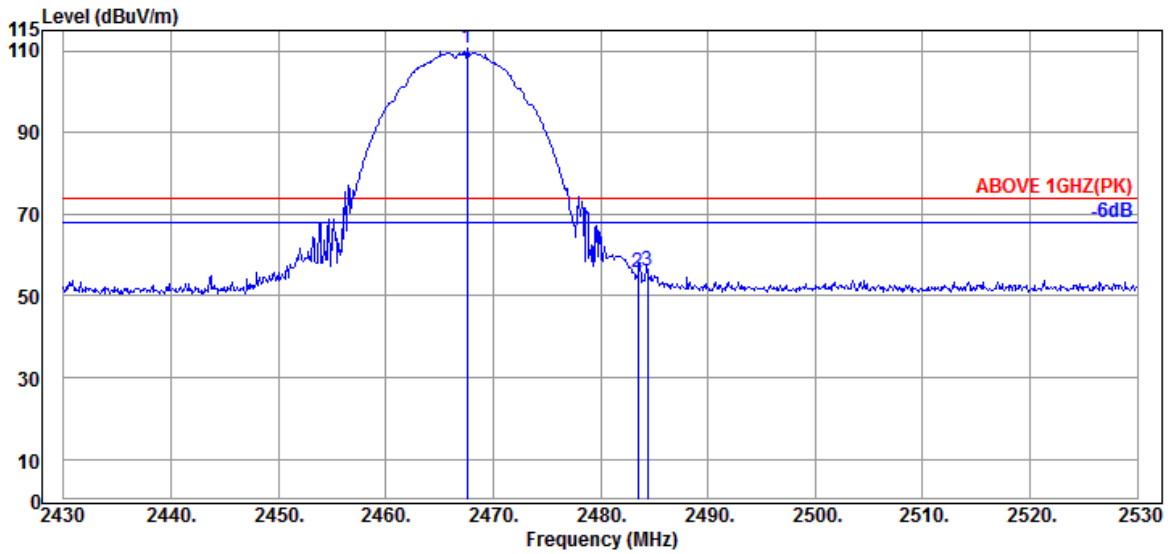

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	32.26	5.85	34.52	107.09	110.68	---	---	Peak
2483.500	32.43	5.87	34.53	51.97	55.74	74.00	18.26	Peak
2484.400	32.43	5.87	34.53	52.41	56.18	74.00	17.82	Peak

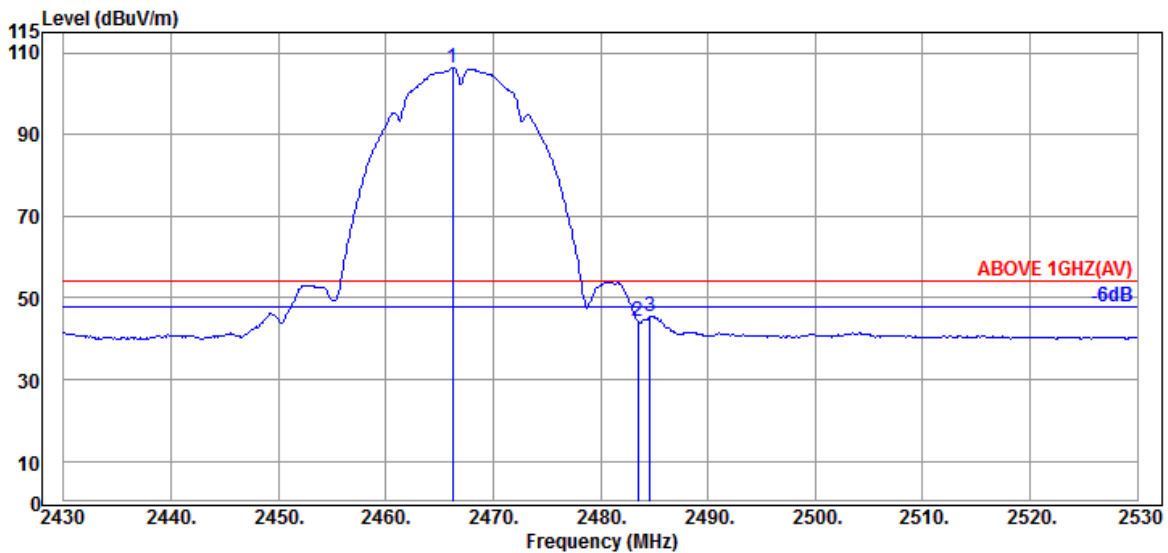


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.17	5.84	34.52	102.79	106.28	---	---	Average
2483.500	32.43	5.87	34.53	40.40	44.17	54.00	9.83	Average
2484.600	32.43	5.87	34.53	41.81	45.58	54.00	8.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

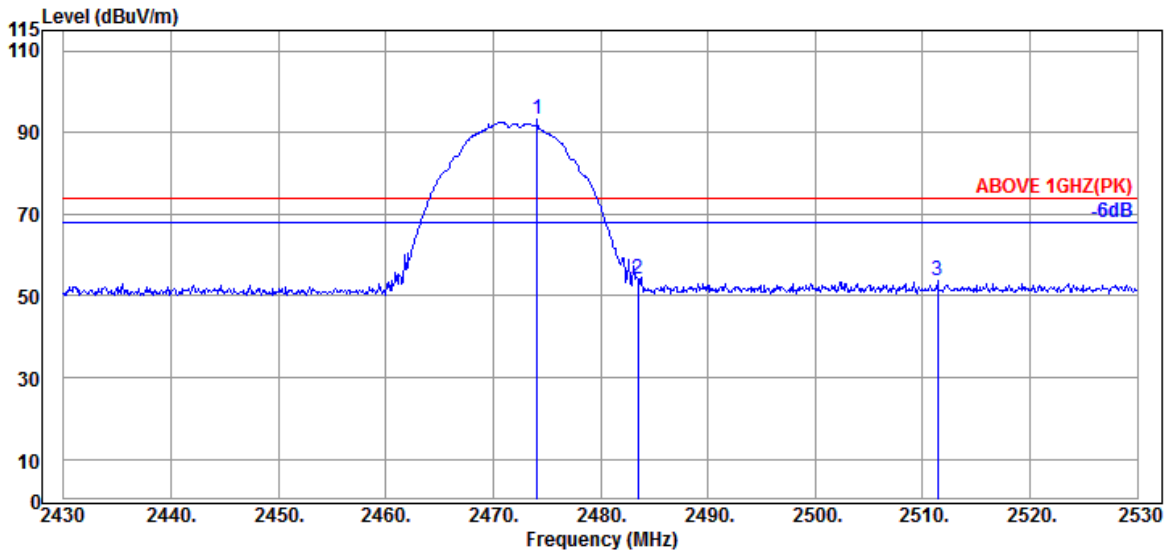

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.100	32.26	5.85	34.52	89.58	93.17	---	---	Peak
2483.500	32.43	5.87	34.53	50.37	54.14	74.00	19.86	Peak
2511.400	32.54	5.93	34.53	49.70	53.64	74.00	20.36	Peak

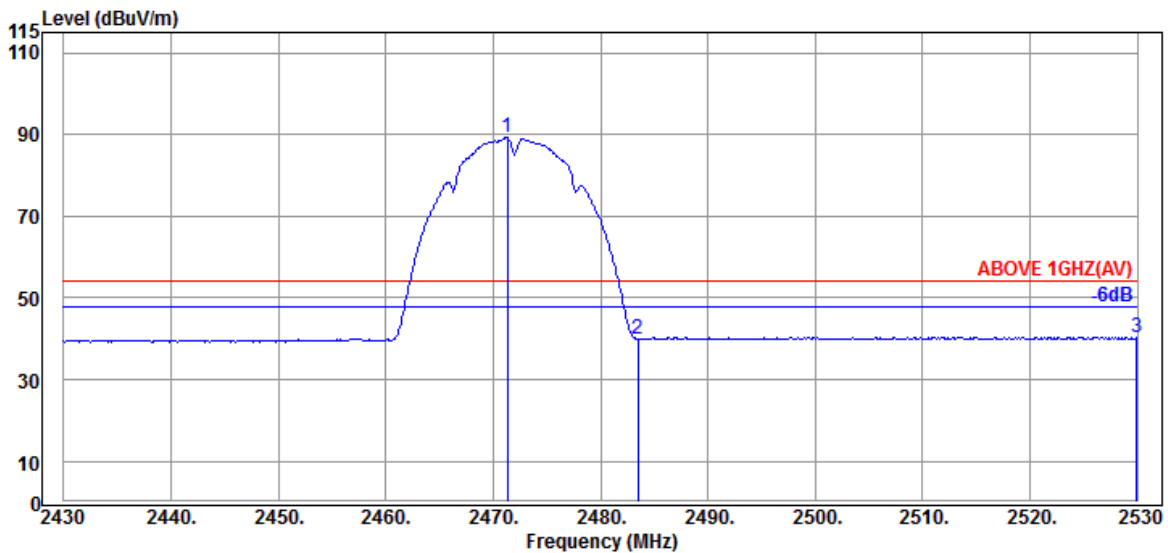


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	32.26	5.85	34.52	85.68	89.27	---	---	Average
2483.500	32.43	5.87	34.53	36.21	39.98	54.00	14.02	Average
2529.900	32.49	5.96	34.54	36.53	40.44	54.00	13.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

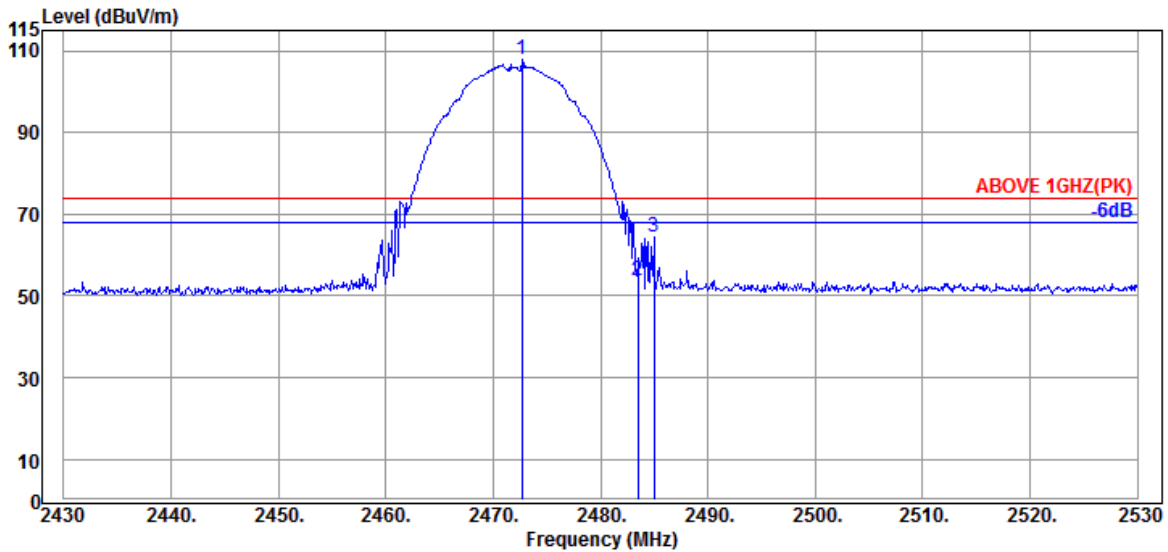

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.700	32.26	5.85	34.52	104.10	107.69	---	---	Peak
2483.500	32.43	5.87	34.53	50.16	53.93	74.00	20.07	Peak
2485.000	32.43	5.87	34.53	60.52	64.29	74.00	9.71	Peak

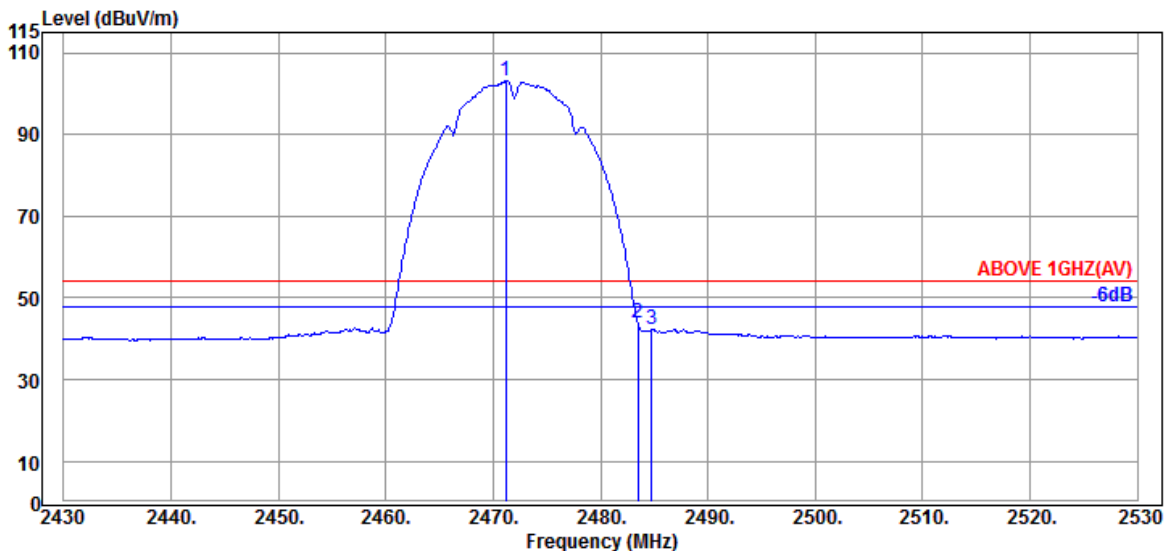


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	32.26	5.85	34.52	99.53	103.12	---	---	Average
2483.500	32.43	5.87	34.53	39.96	43.73	54.00	10.27	Average
2484.800	32.43	5.87	34.53	38.45	42.22	54.00	11.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

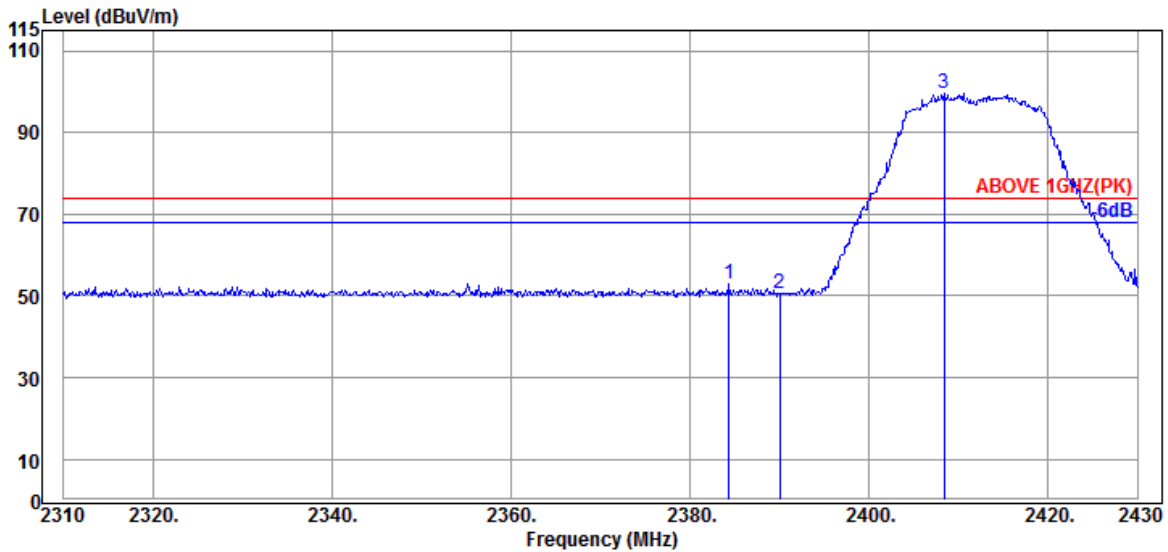

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.400	32.00	5.72	34.51	49.64	52.85	74.00	21.15	Peak
2390.040	32.00	5.72	34.51	47.55	50.76	74.00	23.24	Peak
@ 2408.400	32.00	5.75	34.51	96.35	99.59	---	---	Peak

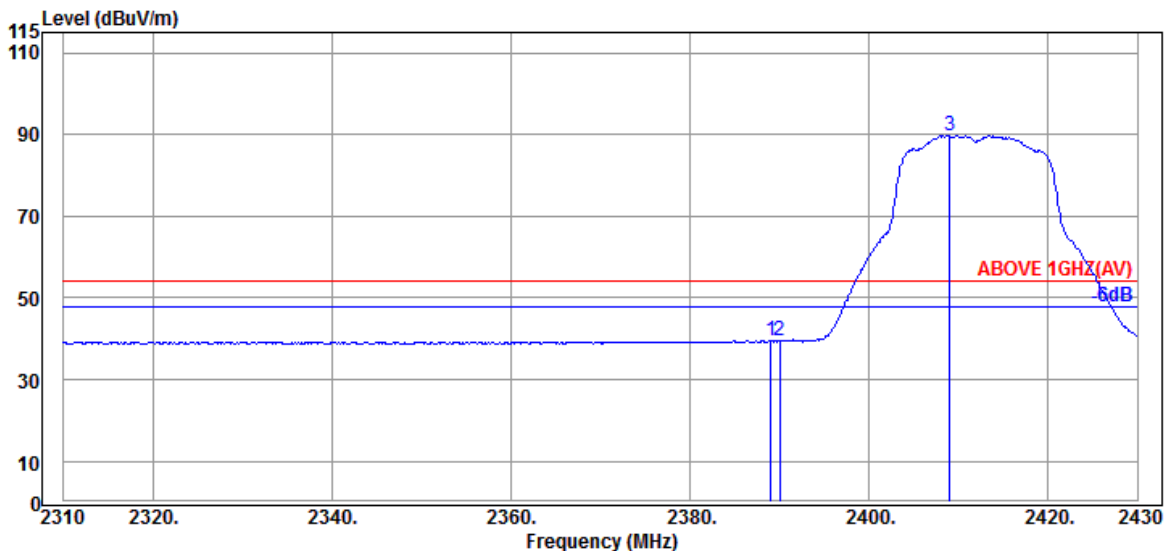


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	32.00	5.72	34.51	36.37	39.58	54.00	14.42	Average
2390.040	32.00	5.72	34.51	36.21	39.42	54.00	14.58	Average
@ 2409.000	32.00	5.75	34.51	86.64	89.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

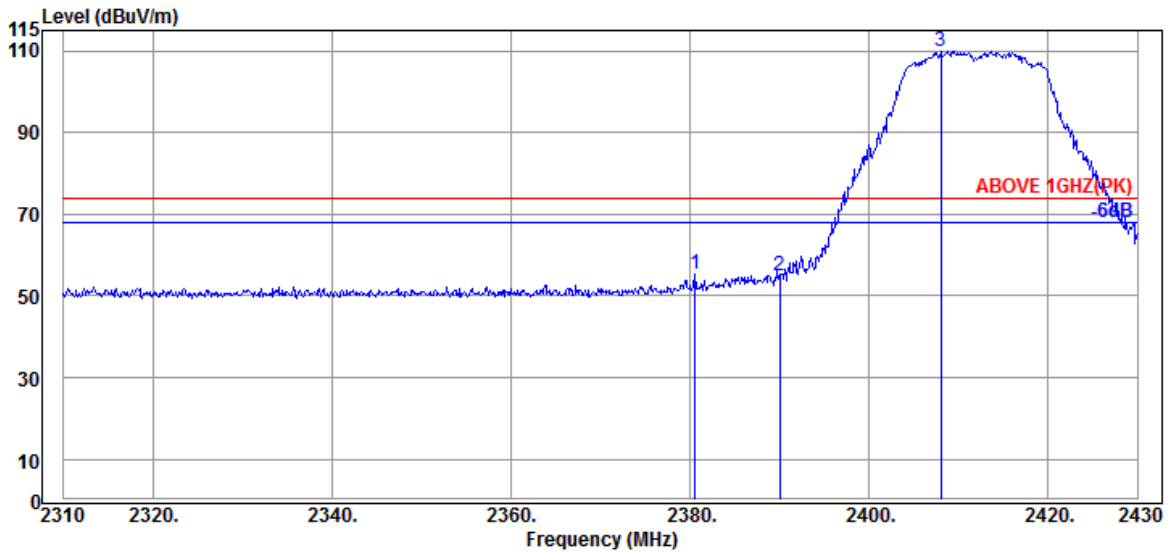

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.560	32.00	5.71	34.51	52.22	55.42	74.00	18.58	Peak
2390.040	32.00	5.72	34.51	51.90	55.11	74.00	18.89	Peak
@ 2408.040	32.00	5.75	34.51	106.80	110.04	---	---	Peak

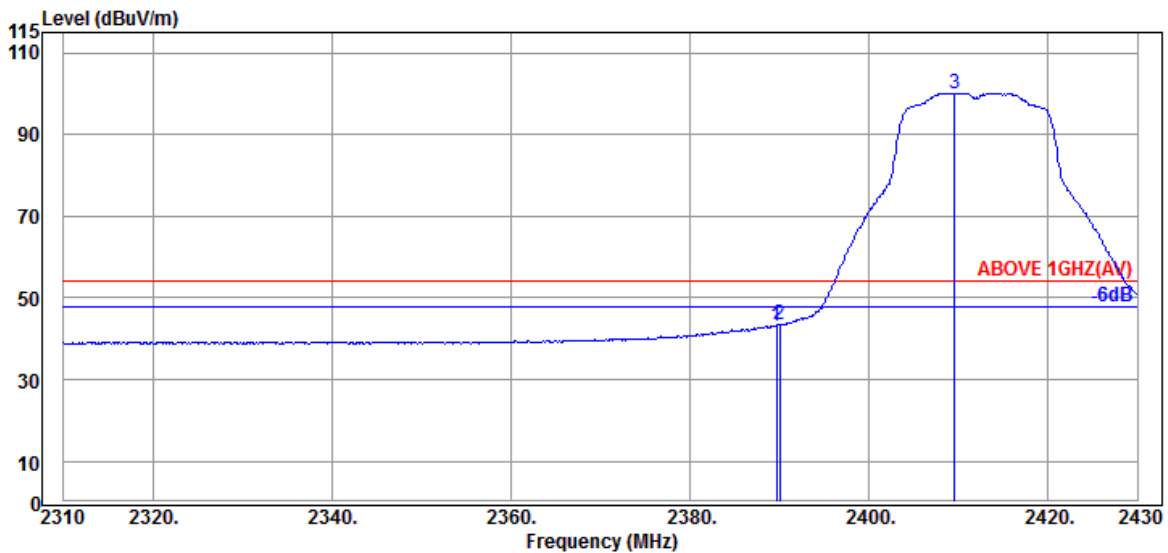


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	39.94	43.15	54.00	10.85	Average
2390.040	32.00	5.72	34.51	40.08	43.29	54.00	10.71	Average
@ 2409.600	32.00	5.75	34.51	96.87	100.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

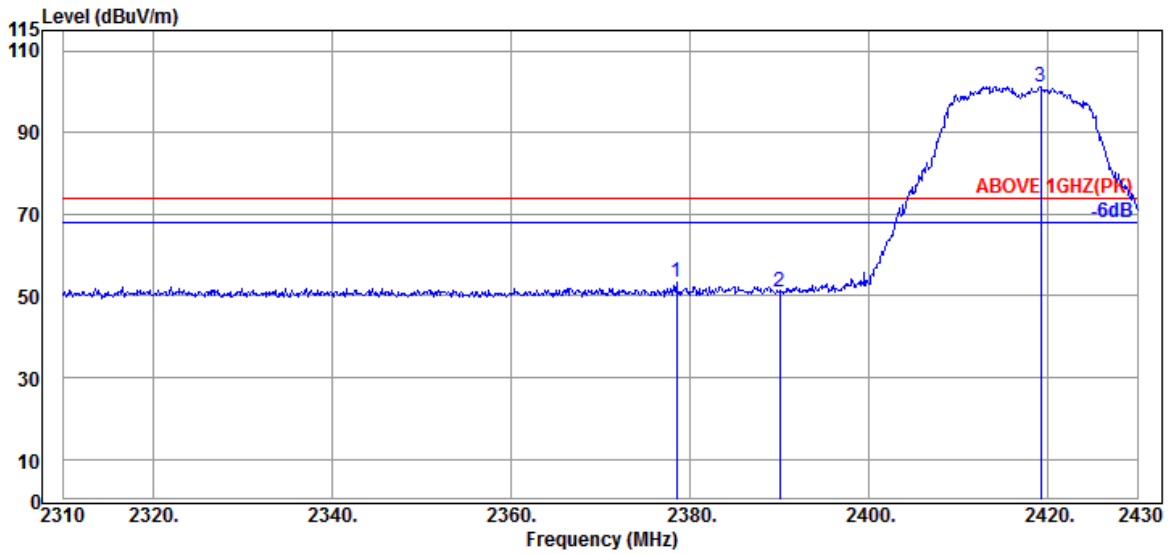

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.520	32.00	5.71	34.50	49.97	53.18	74.00	20.82	Peak
2390.040	32.00	5.72	34.51	47.67	50.88	74.00	23.12	Peak
@ 2419.200	32.00	5.77	34.51	98.05	101.31	---	---	Peak

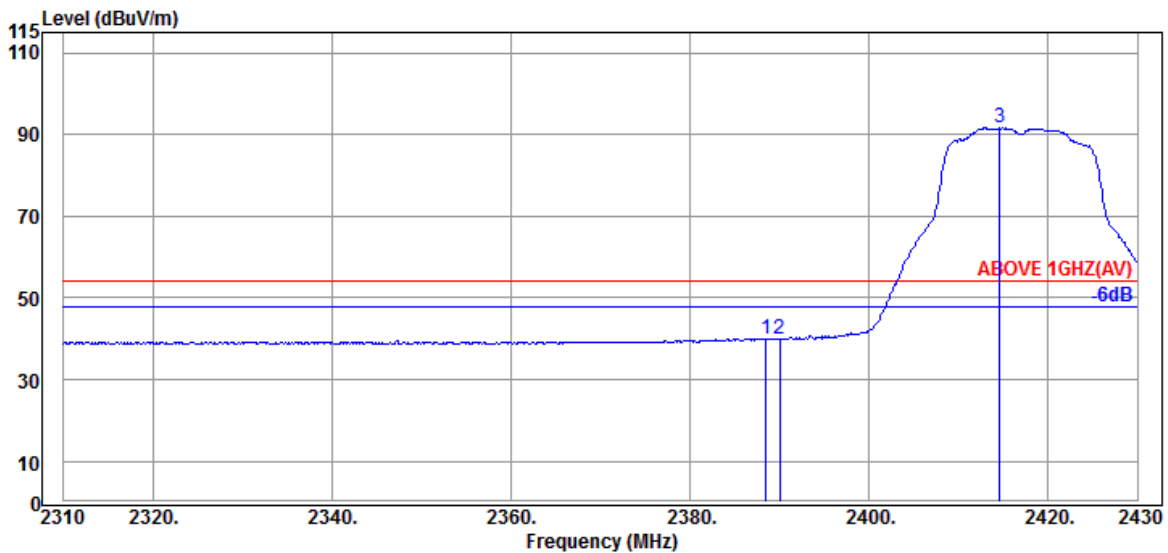


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.480	32.00	5.72	34.51	36.81	40.02	54.00	13.98	Average
2390.040	32.00	5.72	34.51	36.70	39.91	54.00	14.09	Average
@ 2414.640	32.00	5.76	34.51	88.39	91.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

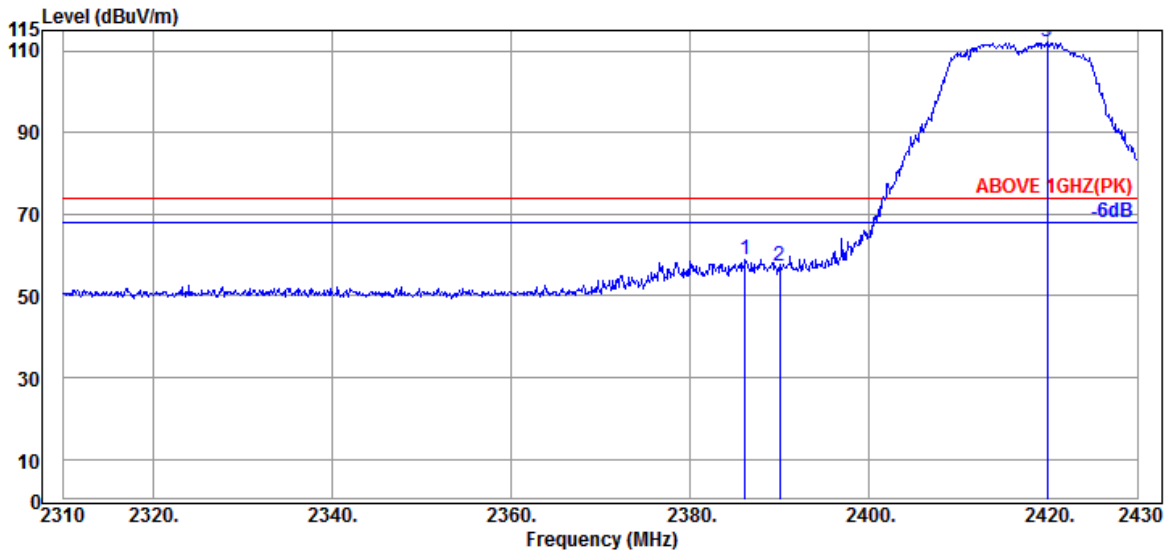

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	32.00	5.72	34.51	55.81	59.02	74.00	14.98	Peak
2390.040	32.00	5.72	34.51	54.00	57.21	74.00	16.79	Peak
@ 2419.920	32.00	5.77	34.51	108.89	112.15	---	---	Peak

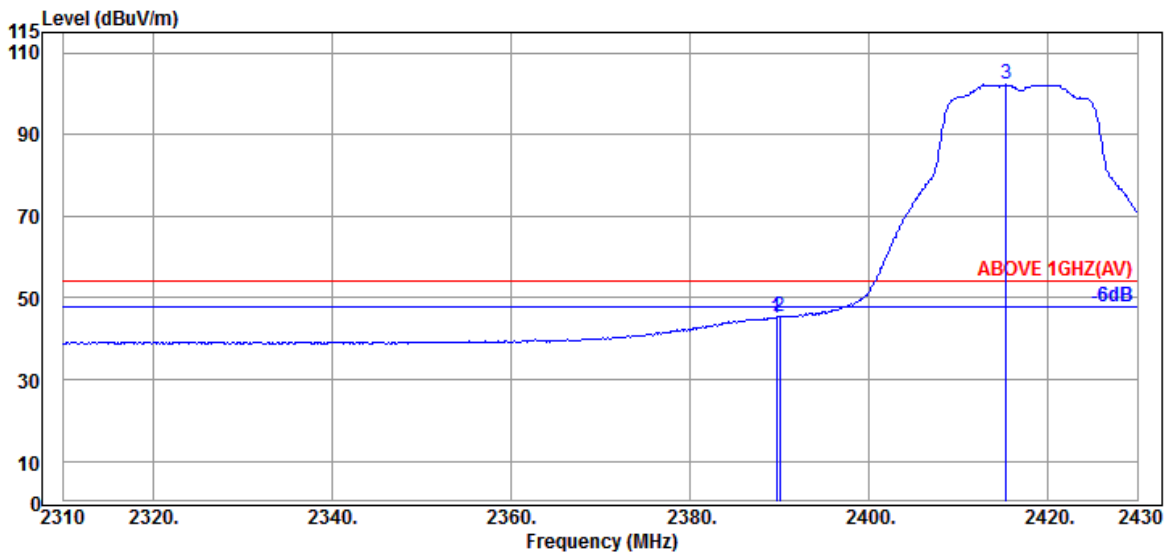


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	42.04	45.25	54.00	8.75	Average
2390.040	32.00	5.72	34.51	42.05	45.26	54.00	8.74	Average
@ 2415.360	32.00	5.76	34.51	99.06	102.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

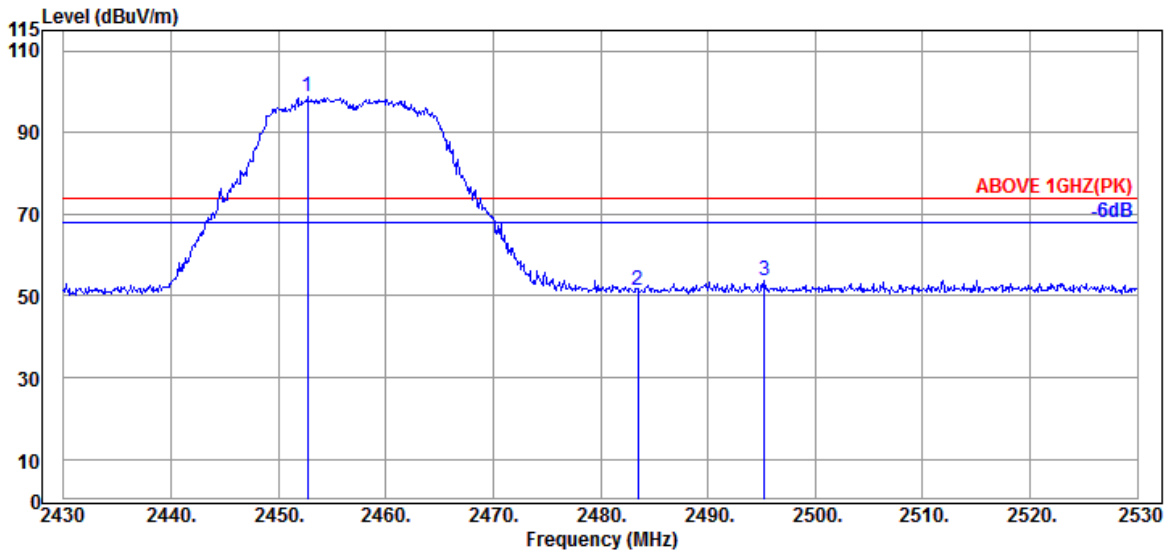

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.700	32.00	5.81	34.52	95.37	98.66	---	---	Peak
2483.500	32.43	5.87	34.53	47.58	51.35	74.00	22.65	Peak
2495.300	32.51	5.88	34.53	49.98	53.84	74.00	20.16	Peak

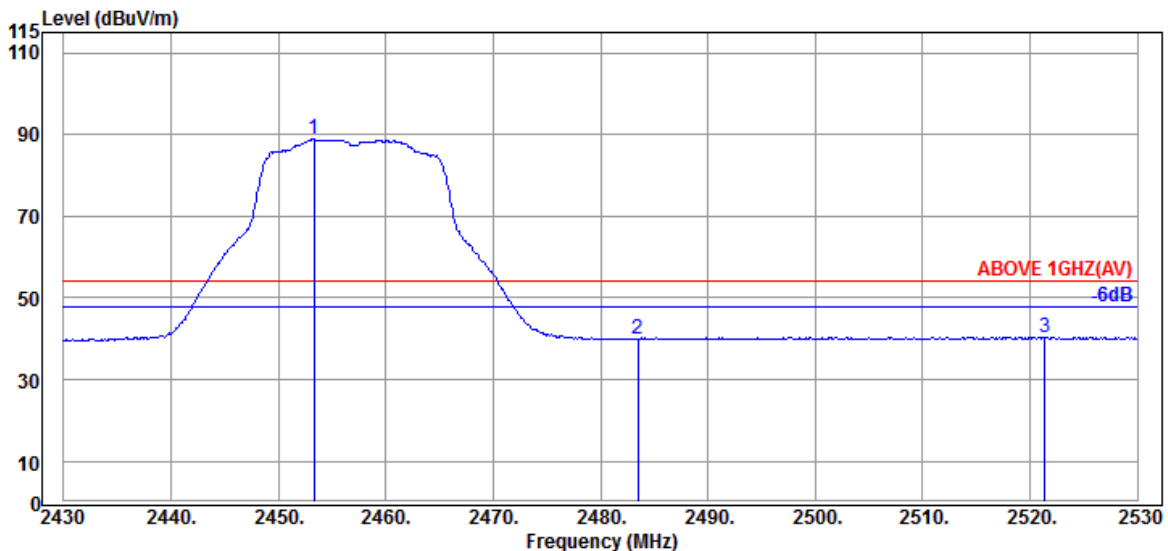


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.300	32.00	5.81	34.52	85.50	88.79	---	---	Average
2483.500	32.43	5.87	34.53	36.11	39.88	54.00	14.12	Average
2521.400	32.51	5.94	34.53	36.42	40.34	54.00	13.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

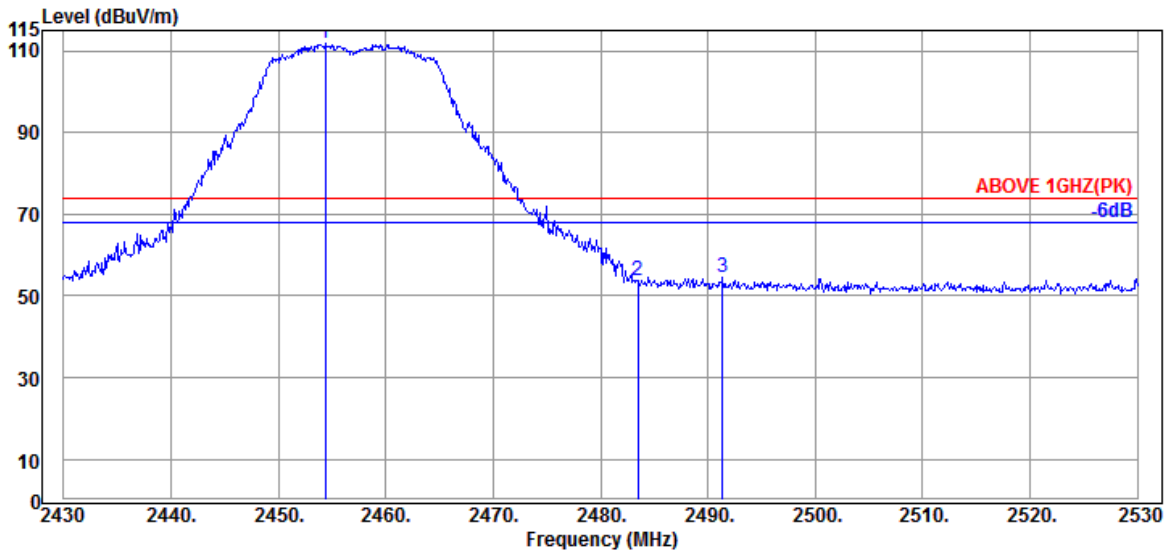

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.400	32.09	5.83	34.52	108.28	111.68	---	---	Peak
2483.500	32.43	5.87	34.53	49.83	53.60	74.00	20.40	Peak
2491.400	32.51	5.88	34.53	50.62	54.48	74.00	19.52	Peak

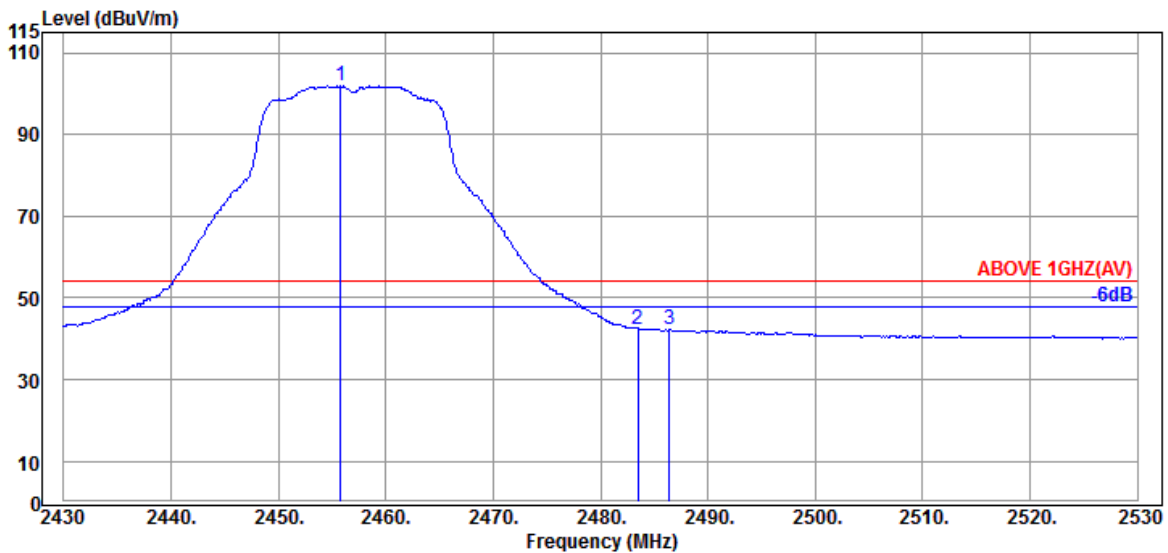


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.800	32.09	5.83	34.52	98.43	101.83	---	---	Average
2483.500	32.43	5.87	34.53	38.67	42.44	54.00	11.56	Average
2486.400	32.43	5.87	34.53	38.61	42.38	54.00	11.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

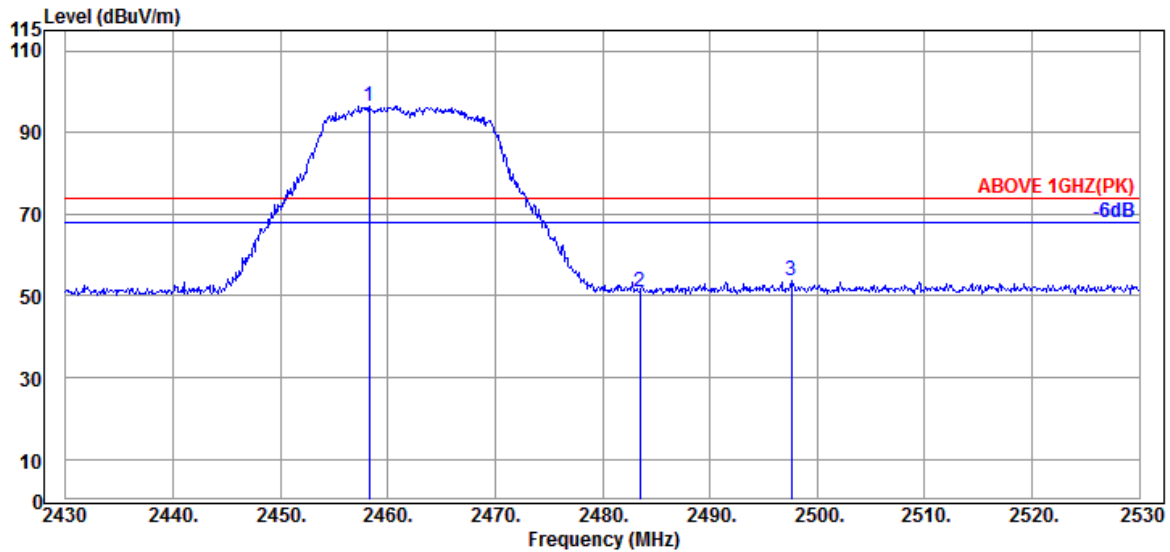

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	32.09	5.83	34.52	93.22	96.62	---	---	Peak
2483.500	32.43	5.87	34.53	47.06	50.83	74.00	23.17	Peak
2497.600	32.60	5.89	34.53	49.76	53.72	74.00	20.28	Peak

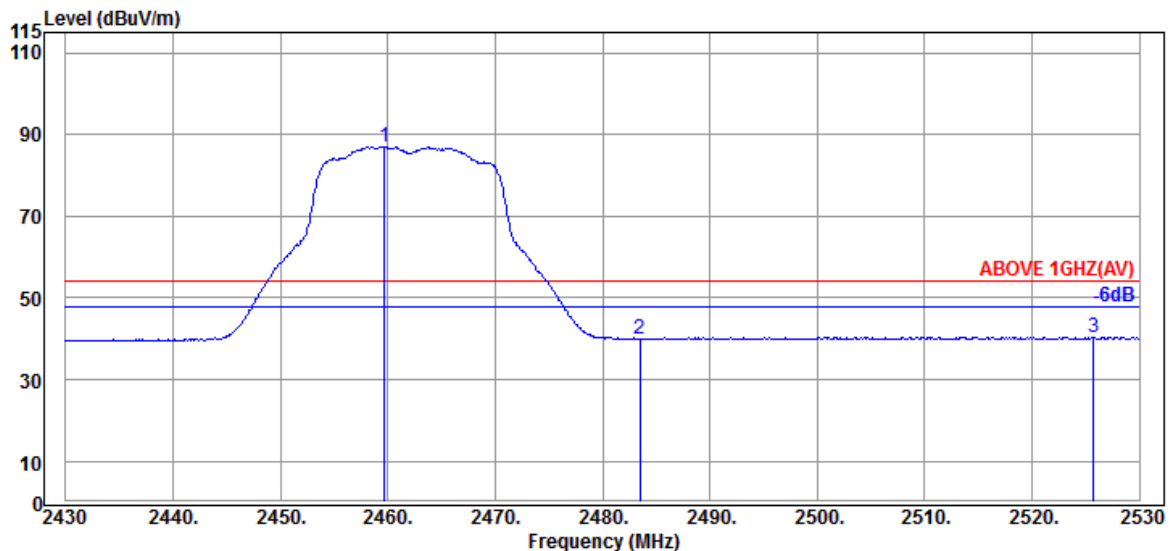


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	32.09	5.83	34.52	83.53	86.93	---	---	Average
2483.500	32.43	5.87	34.53	36.08	39.85	54.00	14.15	Average
2525.700	32.49	5.96	34.54	36.43	40.34	54.00	13.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

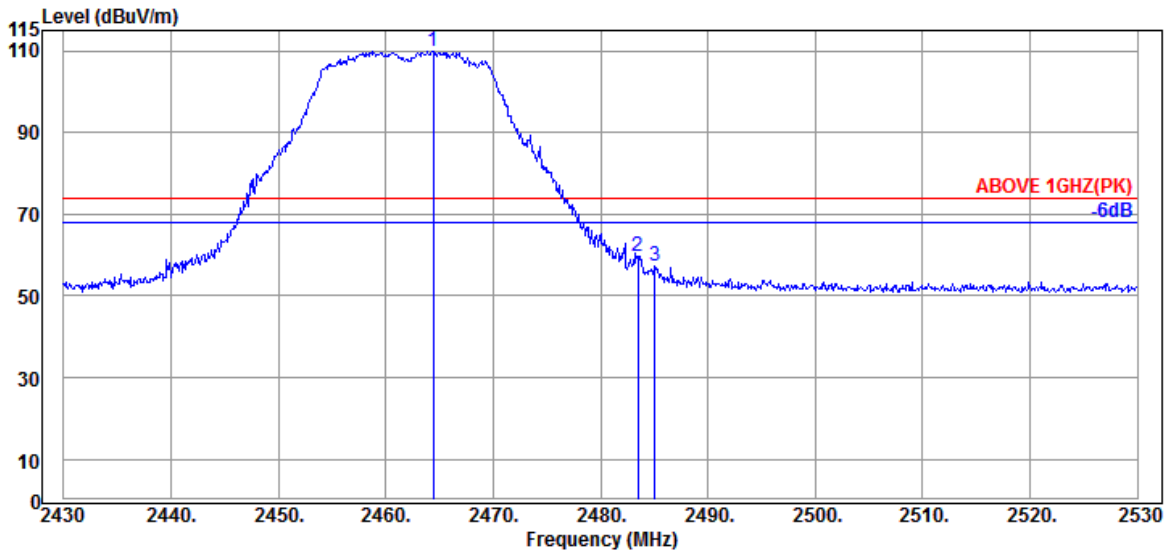

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	32.17	5.84	34.52	106.32	109.81	---	---	Peak
2483.500	32.43	5.87	34.53	55.88	59.65	74.00	14.35	Peak
2485.100	32.43	5.87	34.53	53.58	57.35	74.00	16.65	Peak

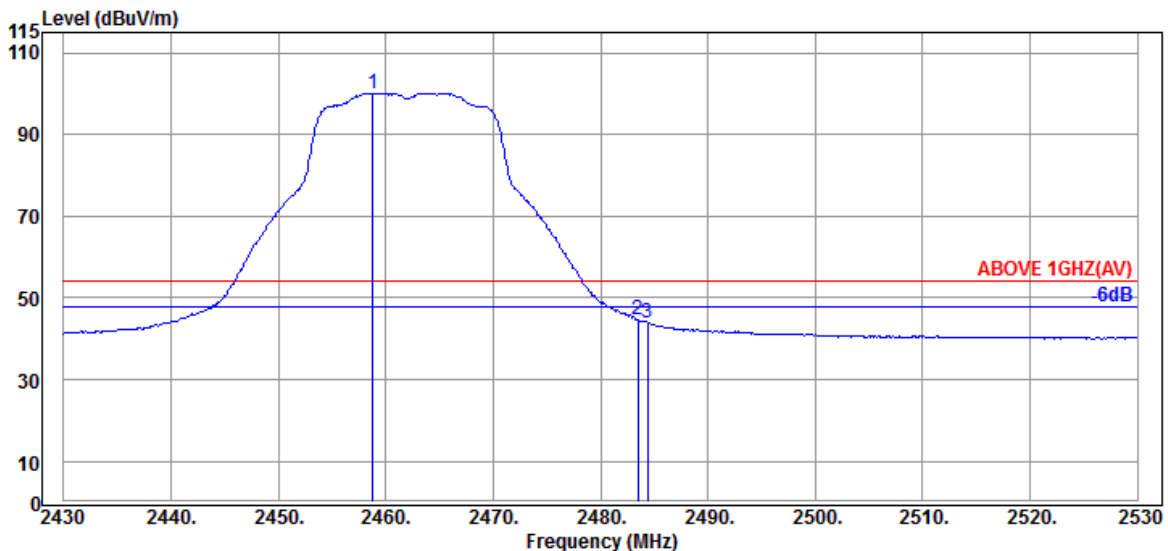


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.800	32.09	5.83	34.52	96.78	100.18	---	---	Average
2483.500	32.43	5.87	34.53	40.75	44.52	54.00	9.48	Average
2484.400	32.43	5.87	34.53	40.24	44.01	54.00	9.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

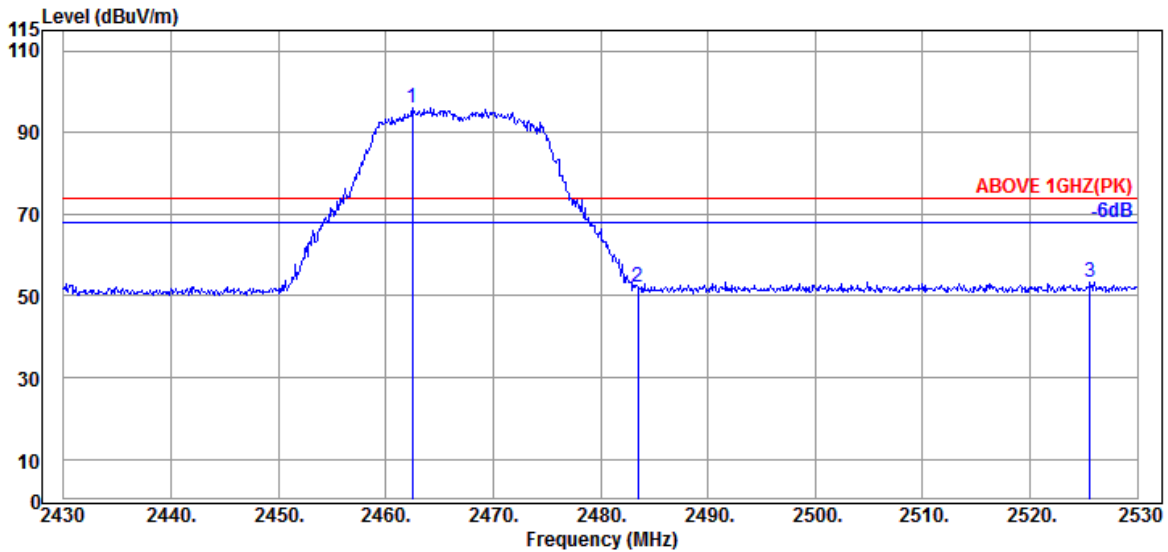

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	32.17	5.84	34.52	92.72	96.21	---	---	Peak
2483.500	32.43	5.87	34.53	48.28	52.05	74.00	21.95	Peak
2525.600	32.49	5.96	34.54	49.63	53.54	74.00	20.46	Peak

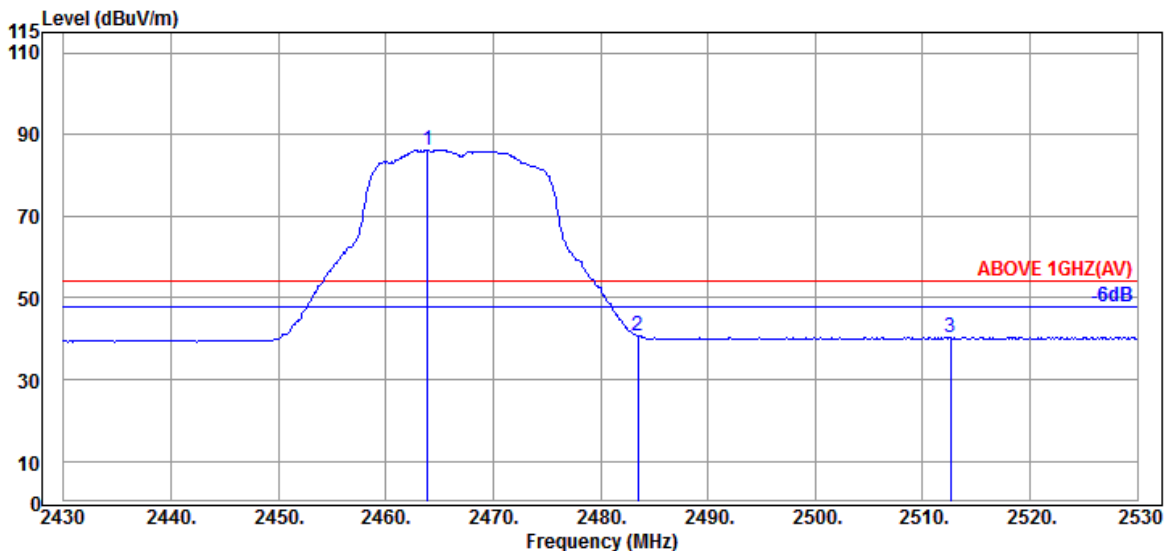


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	32.17	5.84	34.52	82.83	86.32	---	---	Average
2483.500	32.43	5.87	34.53	37.03	40.80	54.00	13.20	Average
2512.600	32.54	5.93	34.53	36.46	40.40	54.00	13.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

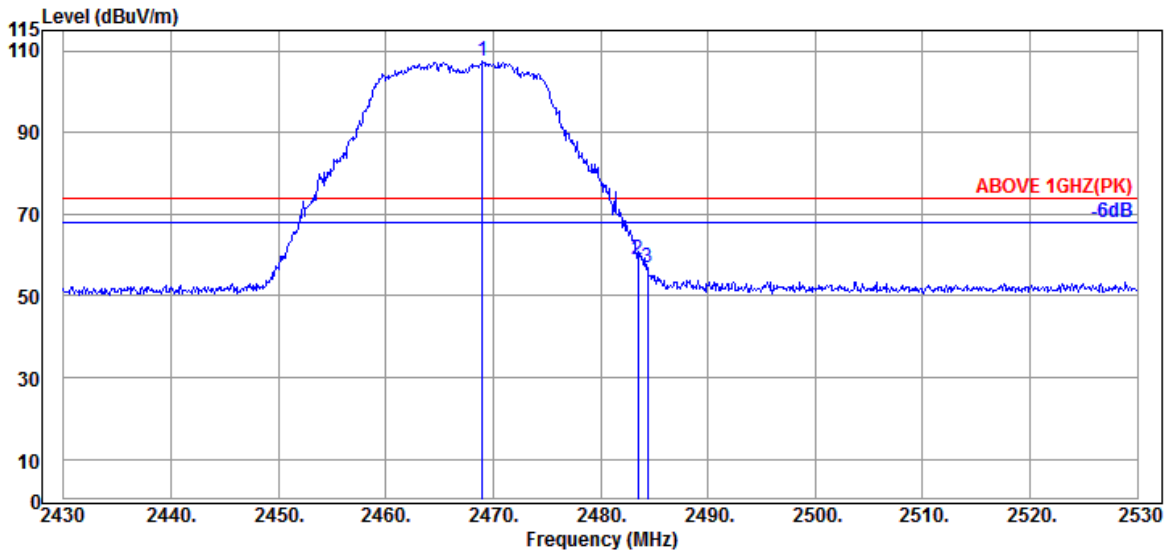

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	32.26	5.85	34.52	103.73	107.32	---	---	Peak
2483.500	32.43	5.87	34.53	55.18	58.95	74.00	15.05	Peak
2484.400	32.43	5.87	34.53	53.02	56.79	74.00	17.21	Peak

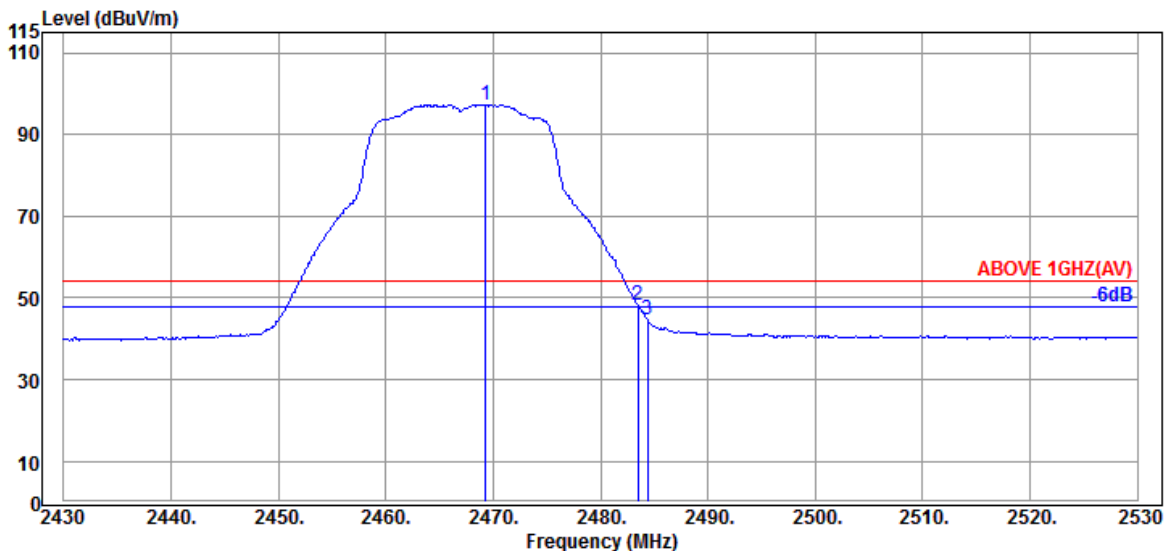


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	32.26	5.85	34.52	93.76	97.35	---	---	Average
2483.500	32.43	5.87	34.53	44.46	48.23	54.00	5.77	Average
2484.400	32.43	5.87	34.53	41.03	44.80	54.00	9.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

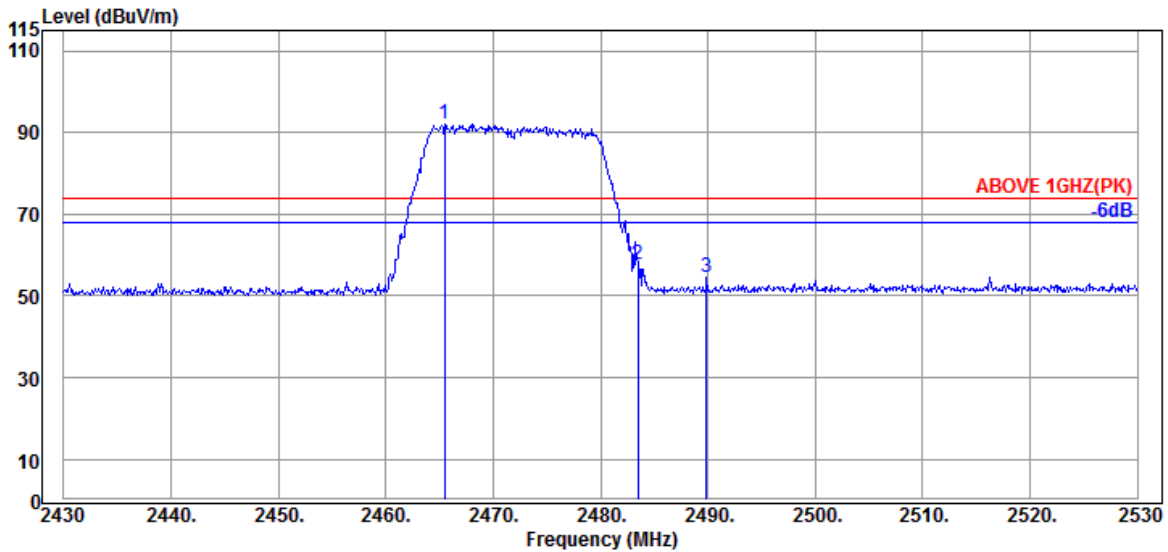

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.17	5.84	34.52	88.72	92.21	---	---	Peak
2483.500	32.43	5.87	34.53	54.12	57.89	74.00	16.11	Peak
2489.900	32.51	5.88	34.53	50.58	54.44	74.00	19.56	Peak

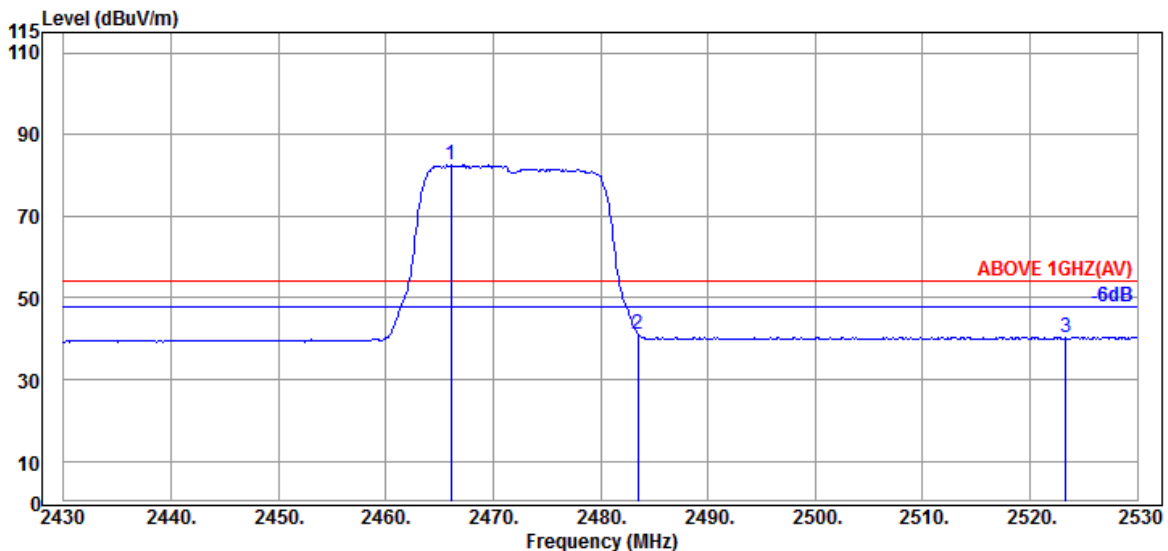


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	32.17	5.84	34.52	78.94	82.43	---	---	Average
2483.500	32.43	5.87	34.53	37.36	41.13	54.00	12.87	Average
2523.300	32.51	5.94	34.53	36.43	40.35	54.00	13.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

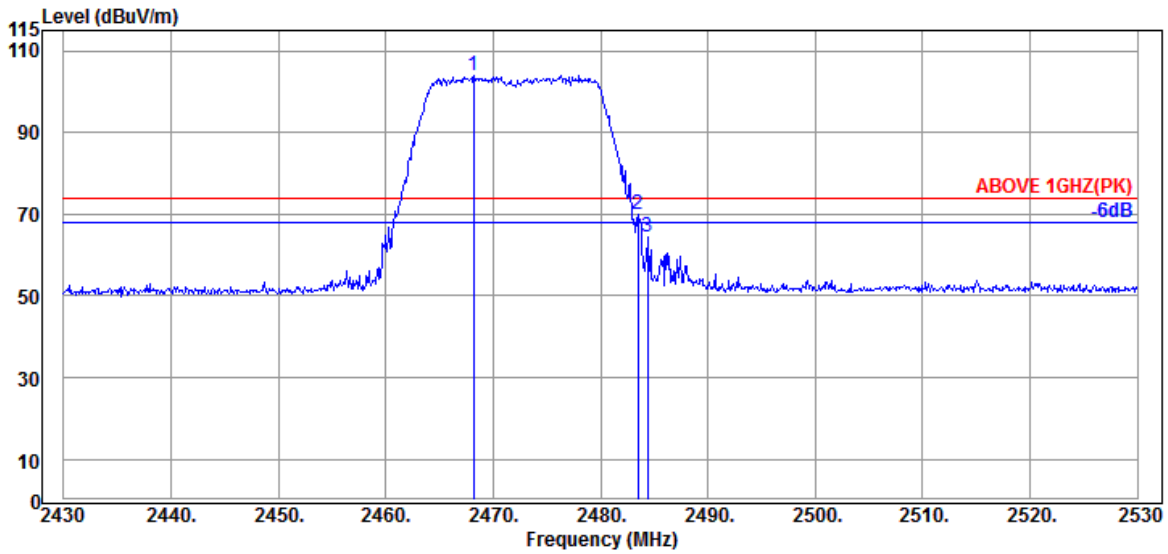

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	32.26	5.85	34.52	100.45	104.04	---	---	Peak
2483.500	32.43	5.87	34.53	66.16	69.93	74.00	4.07	Peak
2484.400	32.43	5.87	34.53	60.81	64.58	74.00	9.42	Peak

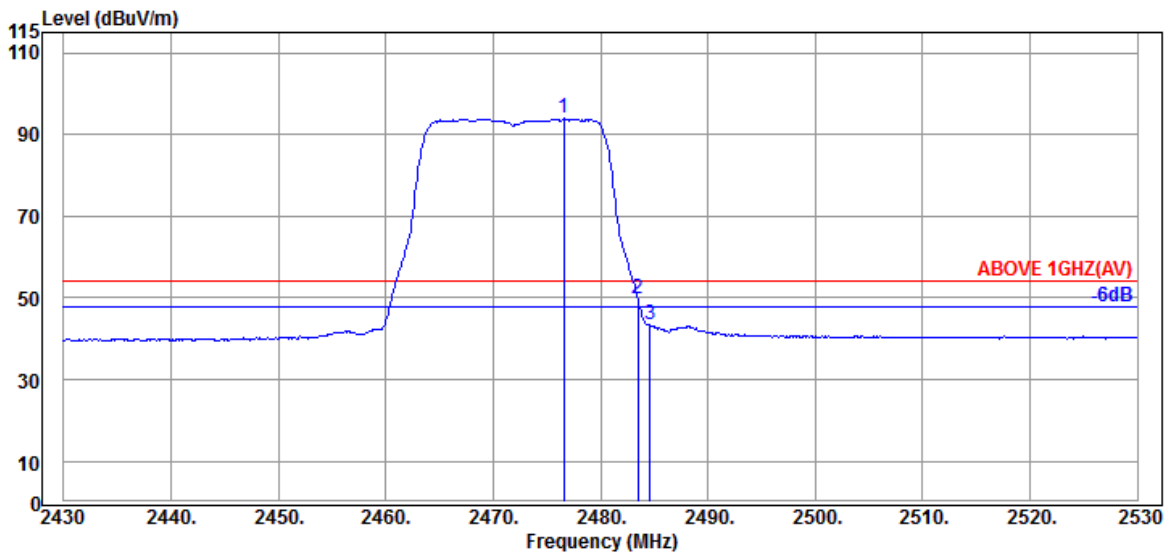


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	32.34	5.86	34.53	90.19	93.86	---	---	Average
2483.500	32.43	5.87	34.53	45.93	49.70	54.00	4.30	Average
2484.600	32.43	5.87	34.53	39.74	43.51	54.00	10.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

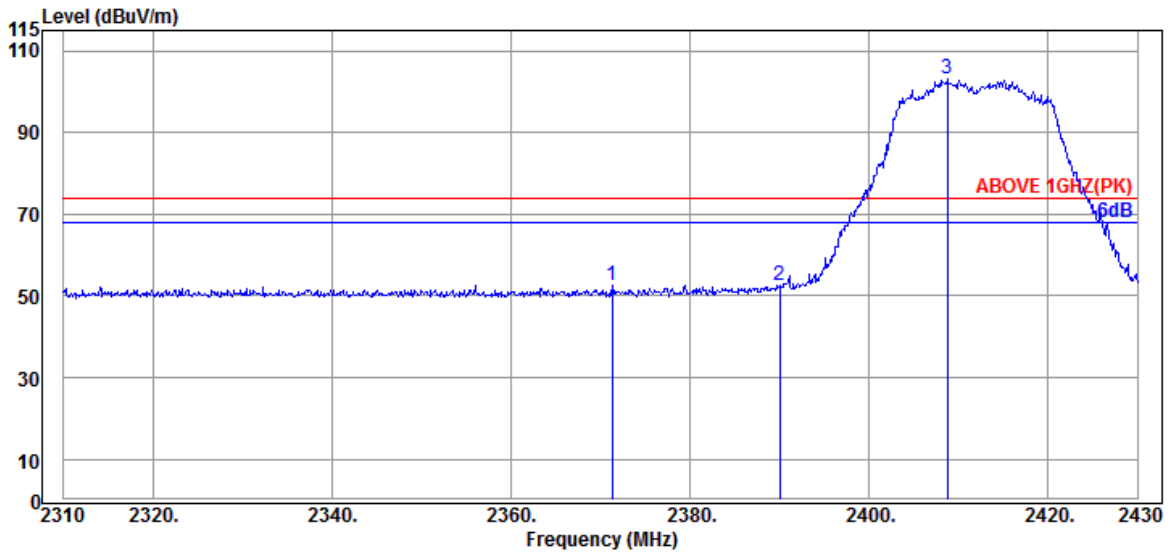

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.320	32.00	5.70	34.50	49.25	52.45	74.00	21.55	Peak
2390.040	32.00	5.72	34.51	49.23	52.44	74.00	21.56	Peak
@ 2408.760	32.00	5.75	34.51	99.79	103.03	---	---	Peak

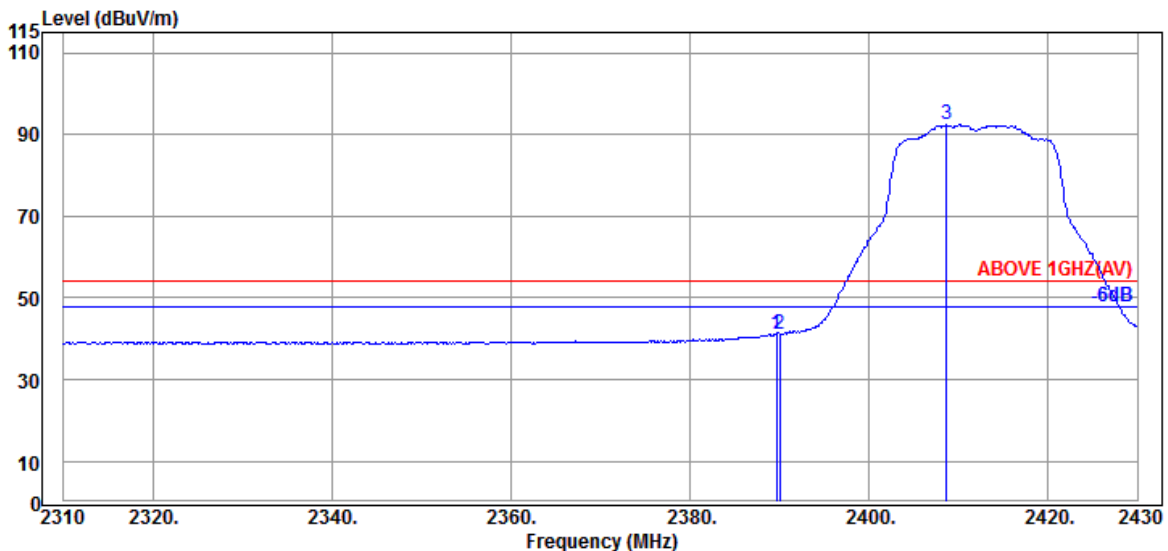


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	37.96	41.17	54.00	12.83	Average
2390.040	32.00	5.72	34.51	37.96	41.17	54.00	12.83	Average
@ 2408.640	32.00	5.75	34.51	89.17	92.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

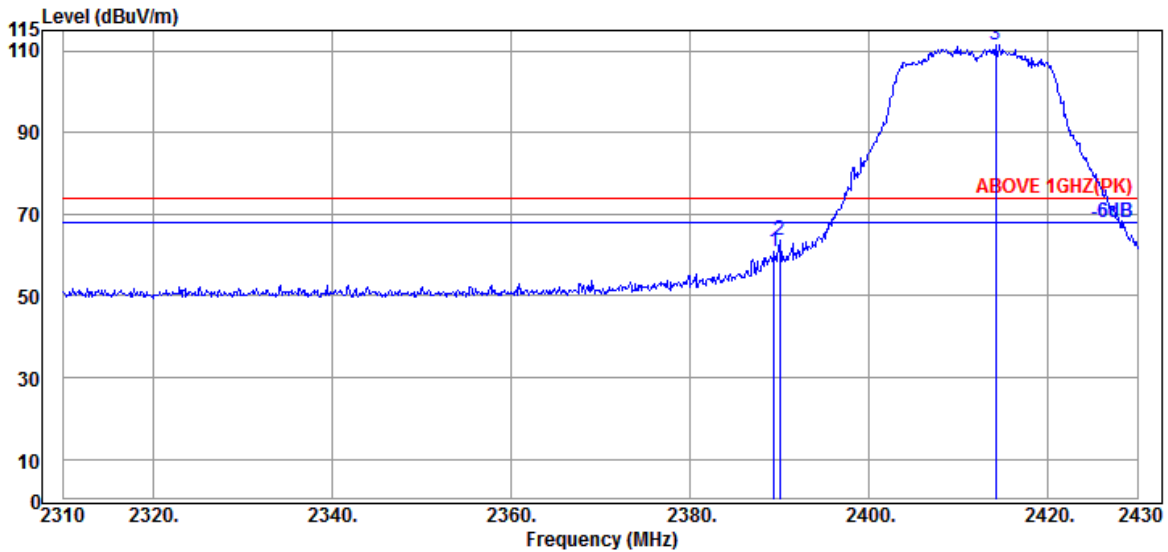

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	32.00	5.72	34.51	57.55	60.76	74.00	13.24	Peak
2390.040	32.00	5.72	34.51	60.55	63.76	74.00	10.24	Peak
@ 2414.160	32.00	5.76	34.51	108.31	111.56	---	---	Peak

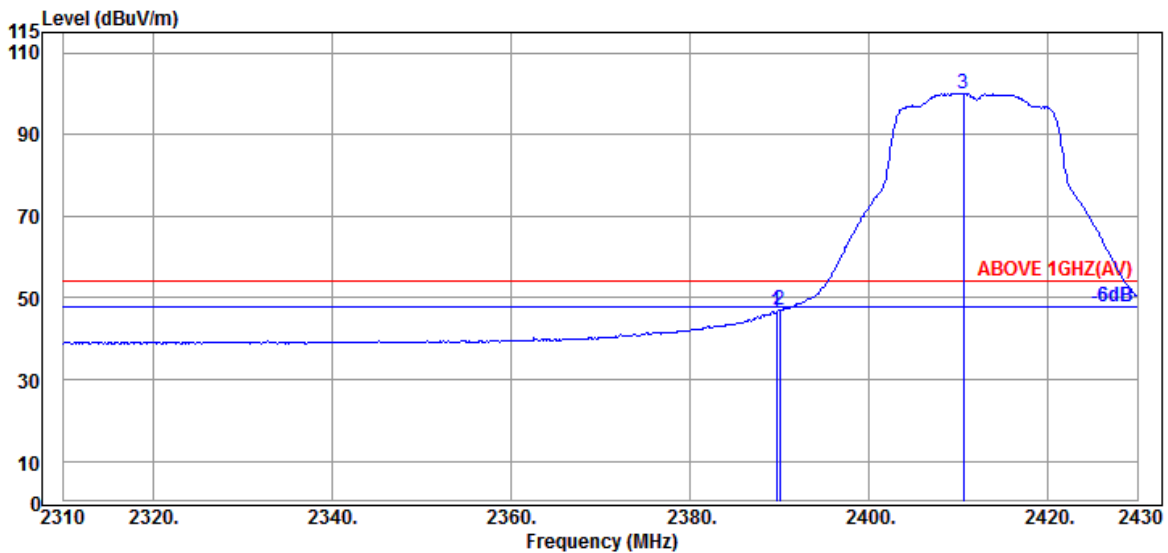


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	43.34	46.55	54.00	7.45	Average
2390.040	32.00	5.72	34.51	43.79	47.00	54.00	7.00	Average
@ 2410.560	32.00	5.75	34.51	96.88	100.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

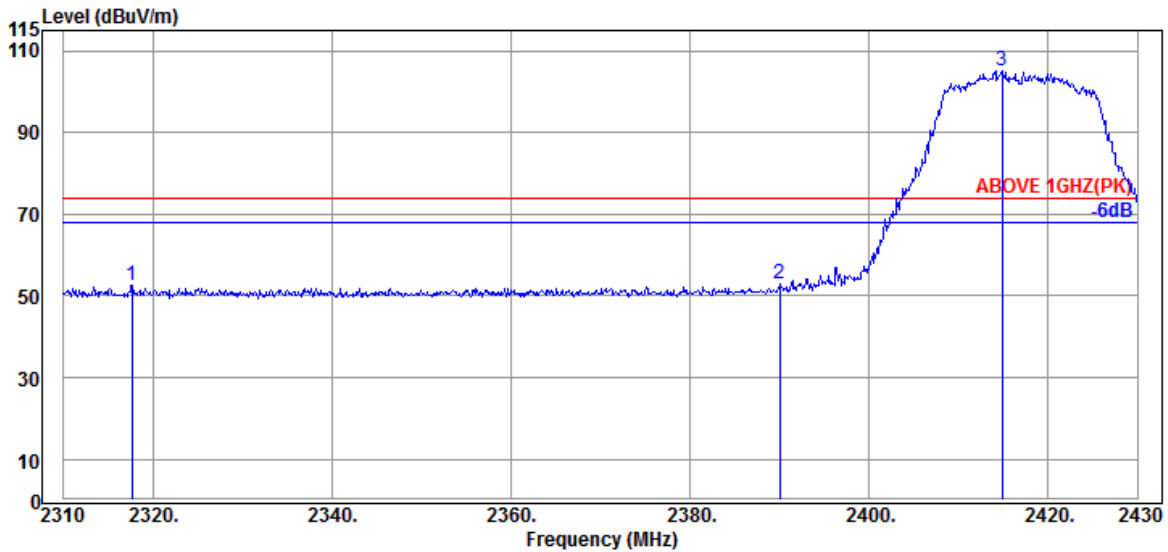

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2317.680	32.12	5.61	34.49	49.26	52.50	74.00	21.50	Peak
2390.040	32.00	5.72	34.51	49.78	52.99	74.00	21.01	Peak
@ 2414.880	32.00	5.76	34.51	102.05	105.30	---	---	Peak

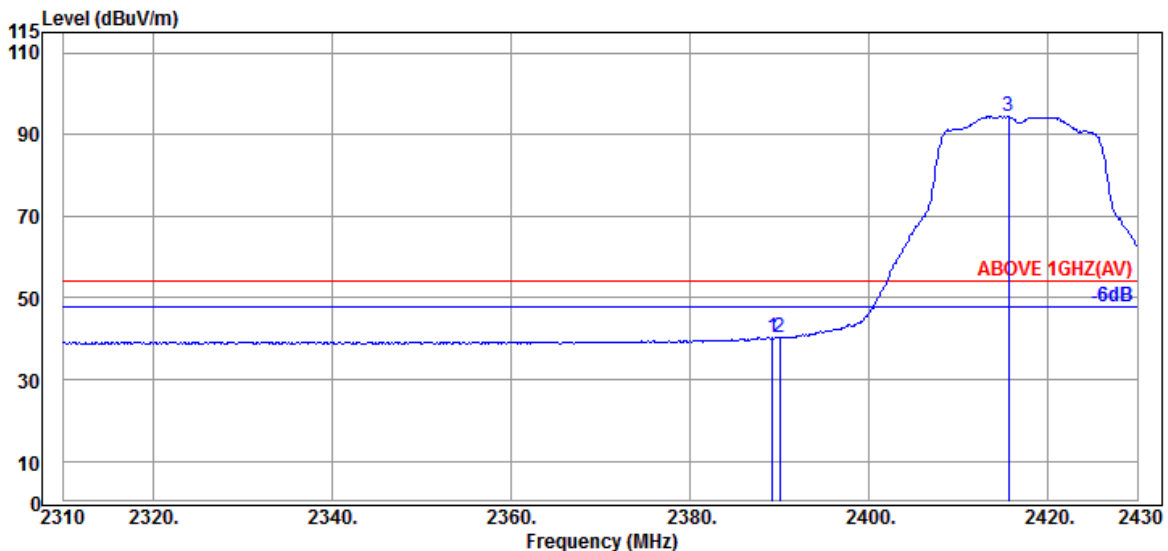


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	37.08	40.29	54.00	13.71	Average
2390.040	32.00	5.72	34.51	36.95	40.16	54.00	13.84	Average
@ 2415.600	32.00	5.76	34.51	91.24	94.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

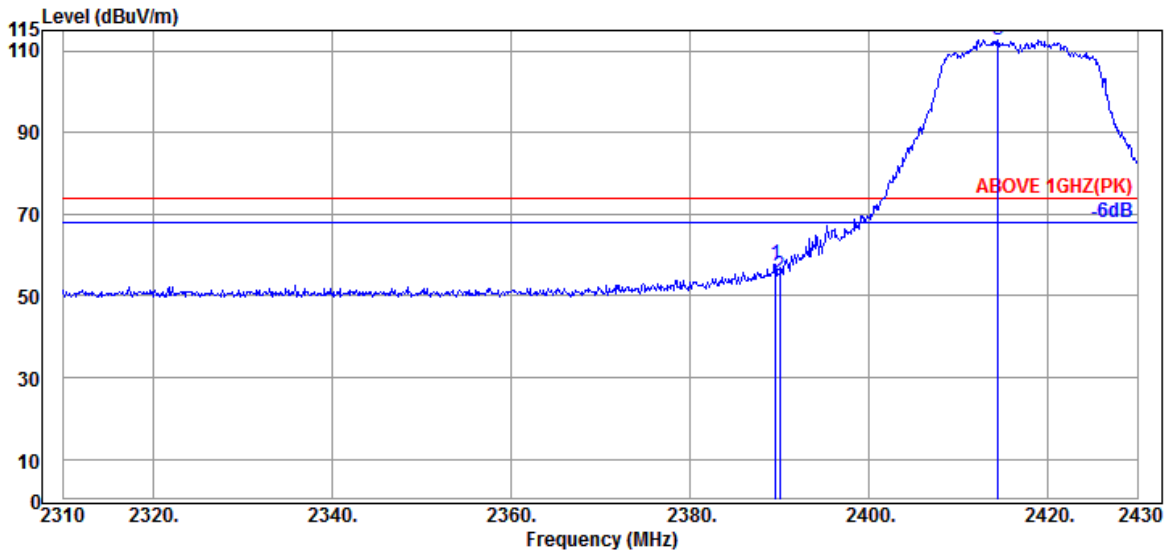

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	32.00	5.72	34.51	54.33	57.54	74.00	16.46	Peak
2390.040	32.00	5.72	34.51	51.53	54.74	74.00	19.26	Peak
@ 2414.400	32.00	5.76	34.51	109.49	112.74	---	---	Peak

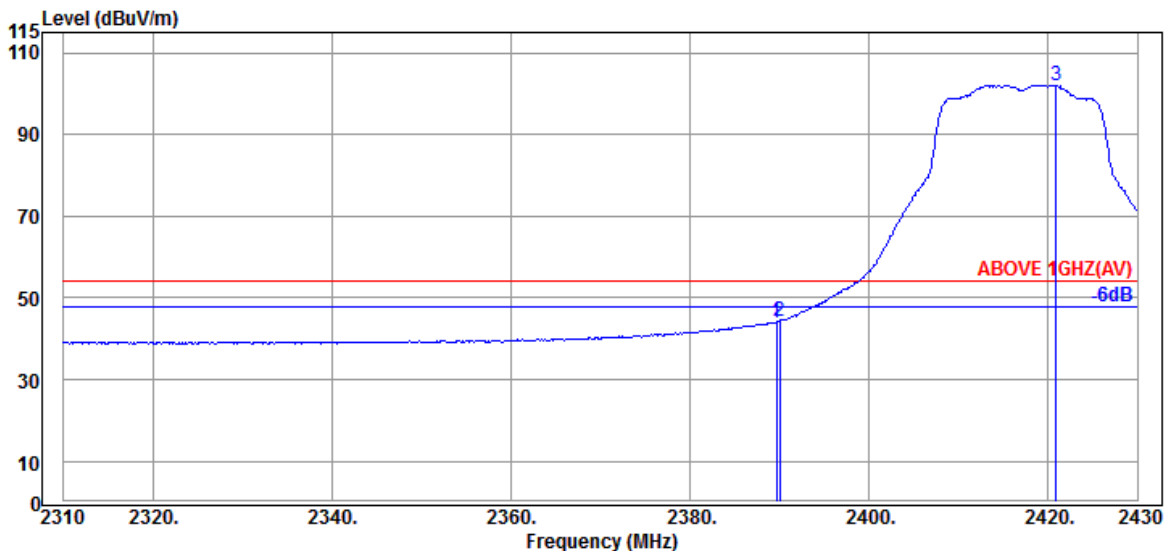


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	40.84	44.05	54.00	9.95	Average
2390.040	32.00	5.72	34.51	41.13	44.34	54.00	9.66	Average
@ 2420.880	32.00	5.77	34.51	98.86	102.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

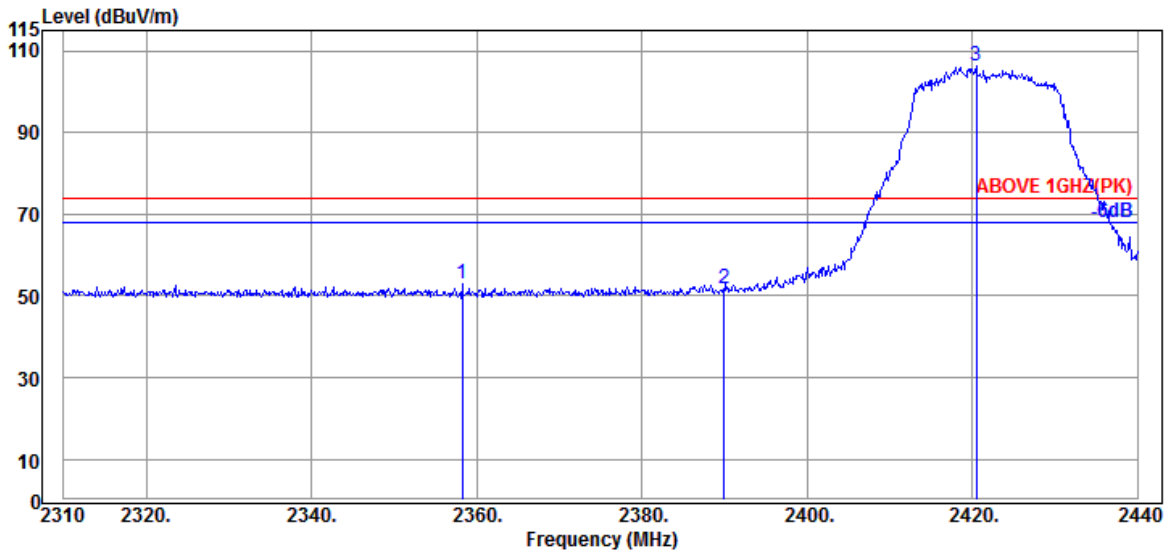

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.230	32.00	5.67	34.50	49.68	52.85	74.00	21.15	Peak
2389.950	32.00	5.72	34.51	48.71	51.92	74.00	22.08	Peak
@ 2420.500	32.00	5.77	34.51	102.91	106.17	---	---	Peak

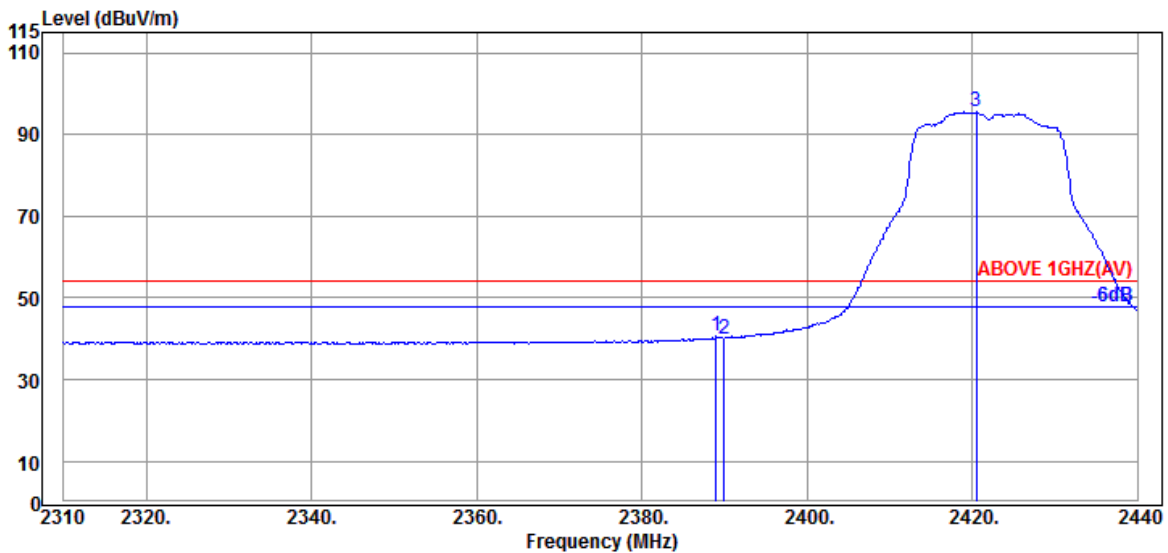


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.040	32.00	5.72	34.51	37.31	40.52	54.00	13.48	Average
2389.950	32.00	5.72	34.51	36.85	40.06	54.00	13.94	Average
@ 2420.500	32.00	5.77	34.51	92.22	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

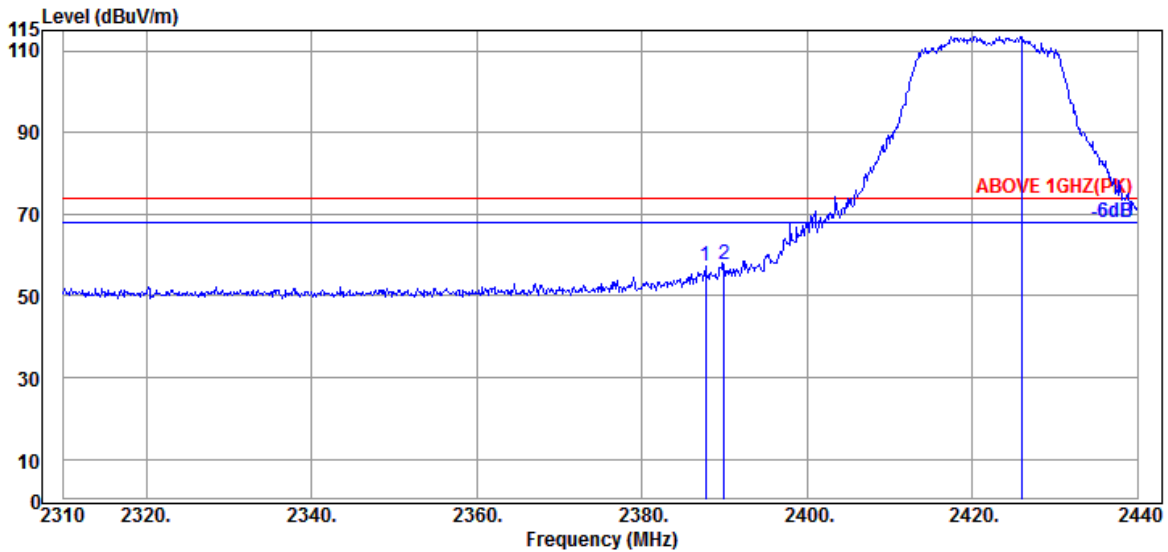

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.740	32.00	5.72	34.51	53.91	57.12	74.00	16.88	Peak
2389.950	32.00	5.72	34.51	54.34	57.55	74.00	16.45	Peak
@ 2426.090	32.00	5.78	34.51	110.16	113.43	---	---	Peak

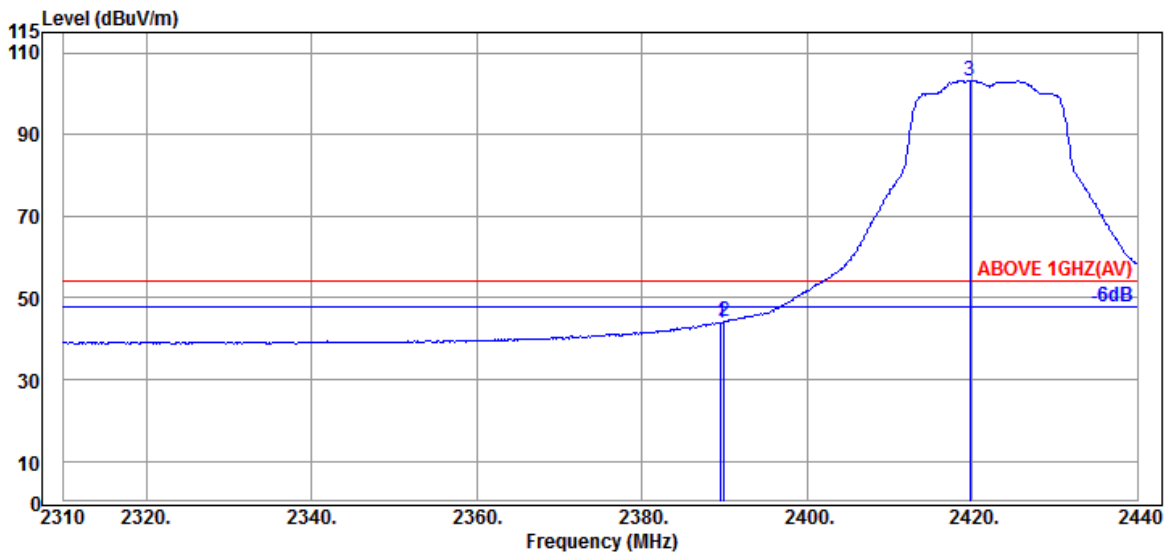


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	32.00	5.72	34.51	40.78	43.99	54.00	10.01	Average
2389.950	32.00	5.72	34.51	41.14	44.35	54.00	9.65	Average
@ 2419.720	32.00	5.77	34.51	99.96	103.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

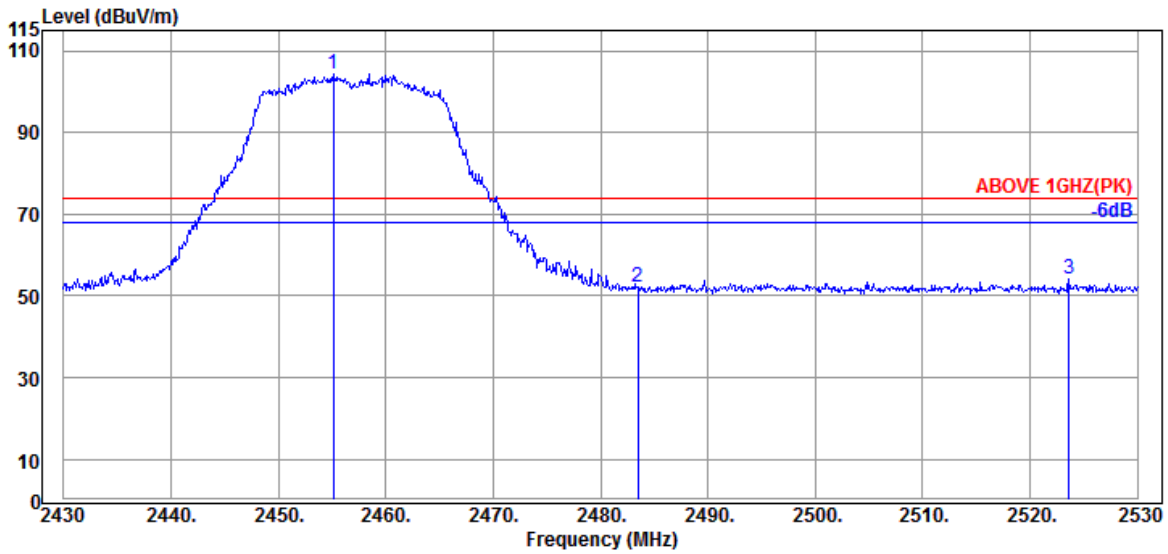

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.100	32.09	5.83	34.52	100.80	104.20	---	---	Peak
2483.500	32.43	5.87	34.53	48.39	52.16	74.00	21.84	Peak
2523.600	32.51	5.94	34.53	50.39	54.31	74.00	19.69	Peak

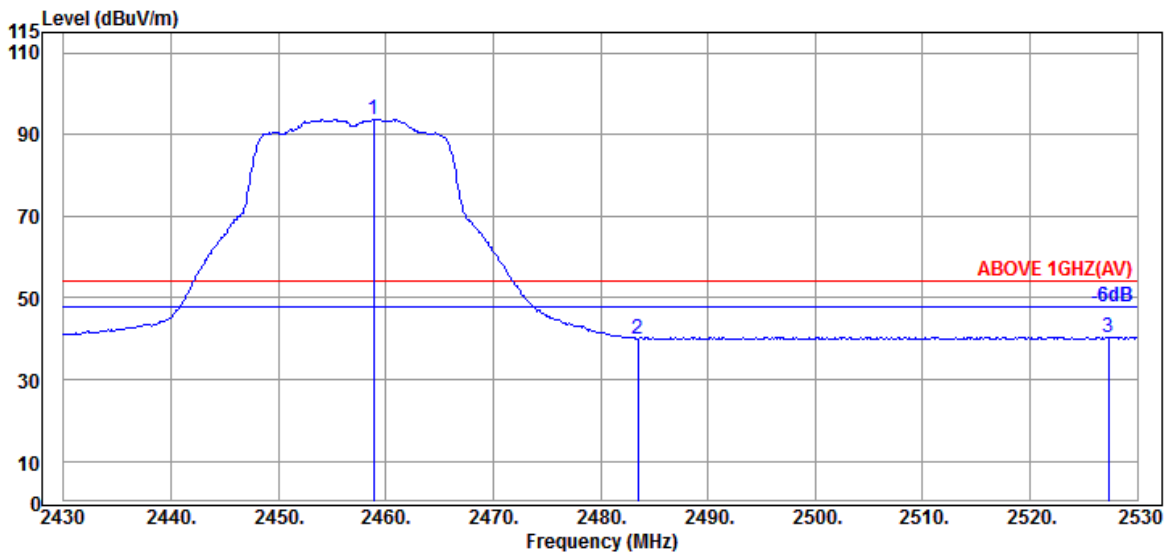


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	32.09	5.83	34.52	90.34	93.74	---	---	Average
2483.500	32.43	5.87	34.53	36.26	40.03	54.00	13.97	Average
2527.300	32.49	5.96	34.54	36.49	40.40	54.00	13.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

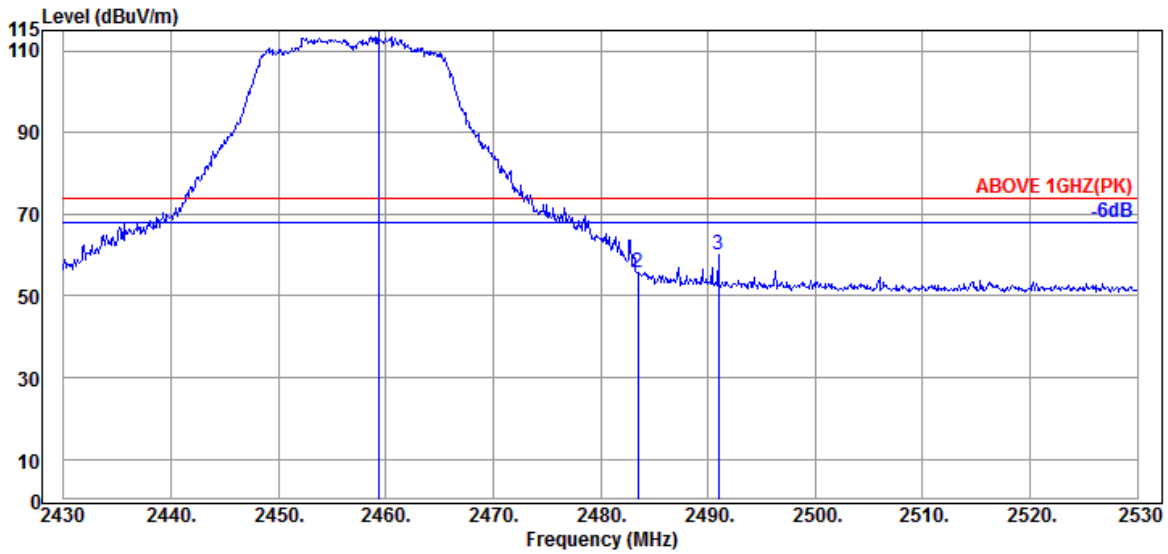

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	32.09	5.83	34.52	111.14	114.54	---	---	Peak
2483.500	32.43	5.87	34.53	51.98	55.75	74.00	18.25	Peak
2491.000	32.51	5.88	34.53	56.19	60.05	74.00	13.95	Peak

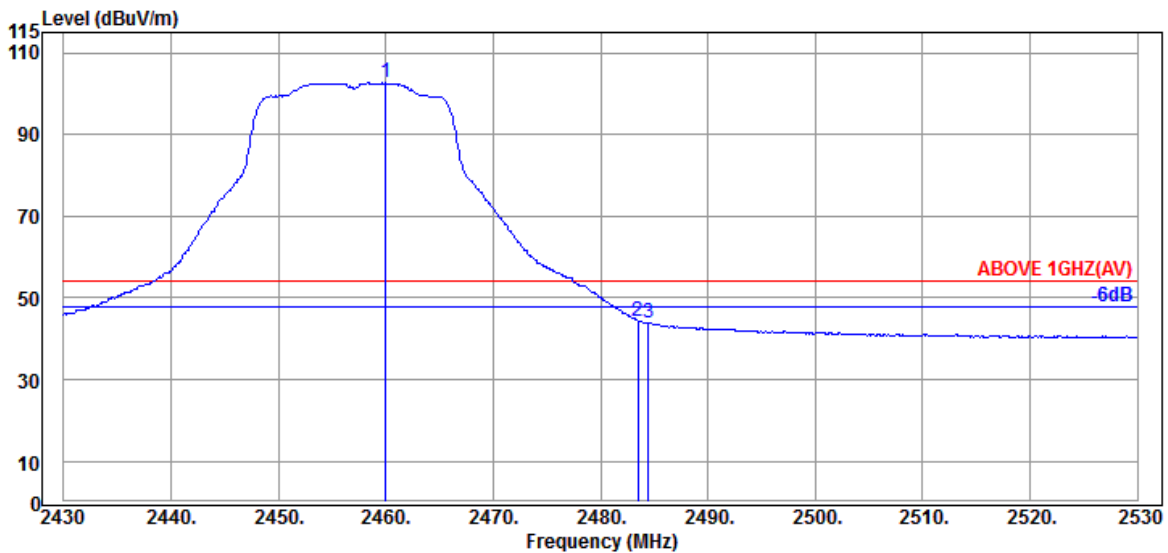


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	32.09	5.83	34.52	99.25	102.65	---	---	Average
2483.500	32.43	5.87	34.53	40.60	44.37	54.00	9.63	Average
2484.500	32.43	5.87	34.53	40.28	44.05	54.00	9.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

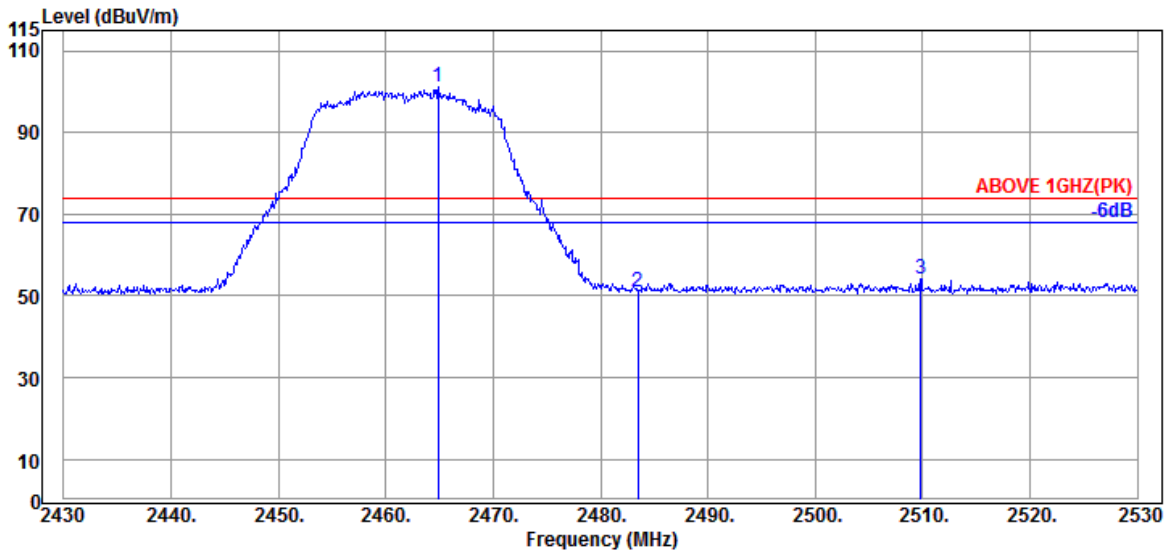

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	32.17	5.84	34.52	97.68	101.17	---	---	Peak
2483.500	32.43	5.87	34.53	47.28	51.05	74.00	22.95	Peak
2509.800	32.57	5.91	34.53	50.22	54.17	74.00	19.83	Peak

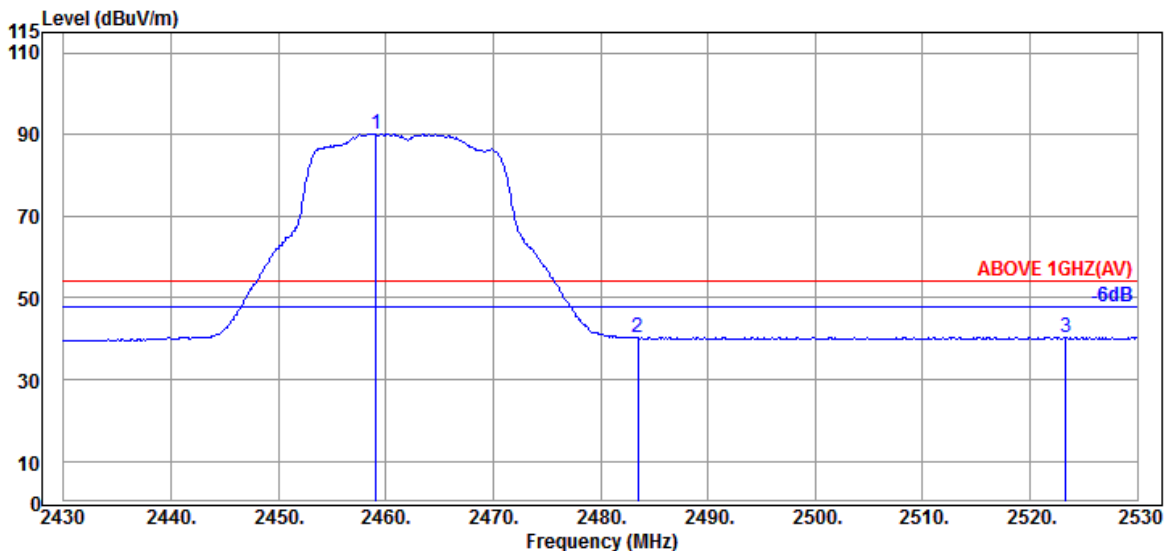


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.100	32.09	5.83	34.52	86.78	90.18	---	---	Average
2483.500	32.43	5.87	34.53	36.47	40.24	54.00	13.76	Average
2523.300	32.51	5.94	34.53	36.46	40.38	54.00	13.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

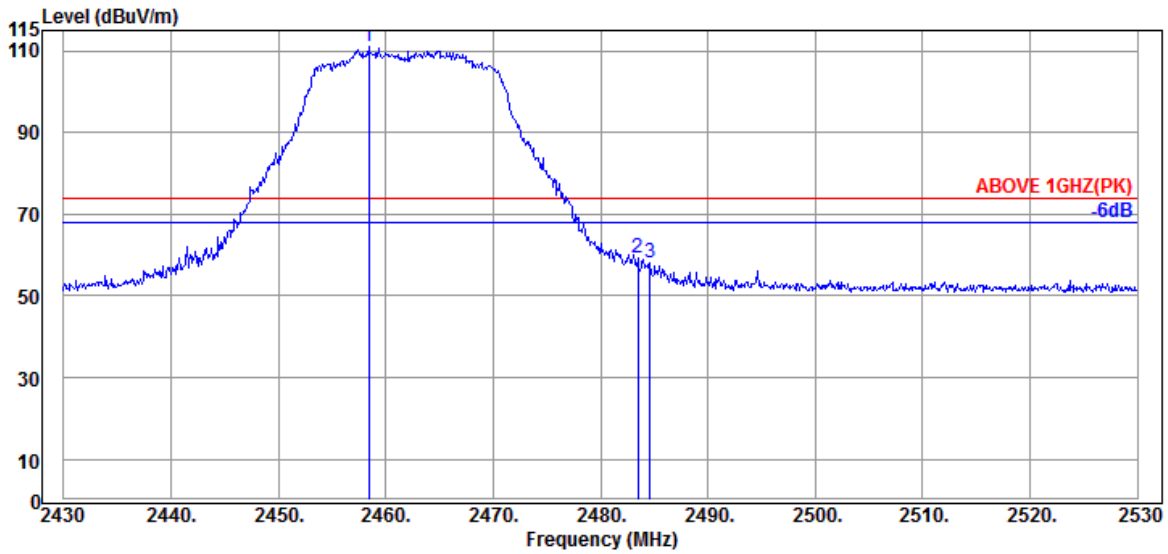

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	32.09	5.83	34.52	107.51	110.91	---	---	Peak
2483.500	32.43	5.87	34.53	55.39	59.16	74.00	14.84	Peak
2484.600	32.43	5.87	34.53	54.21	57.98	74.00	16.02	Peak

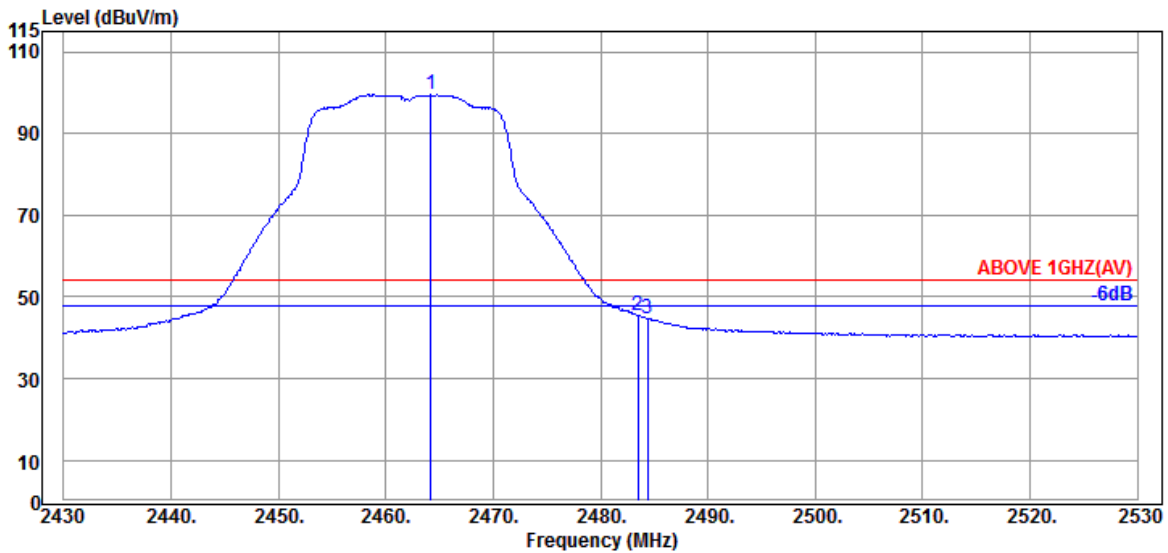


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	32.17	5.84	34.52	95.99	99.48	---	---	Average
2483.500	32.43	5.87	34.53	41.76	45.53	54.00	8.47	Average
2484.400	32.43	5.87	34.53	41.08	44.85	54.00	9.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

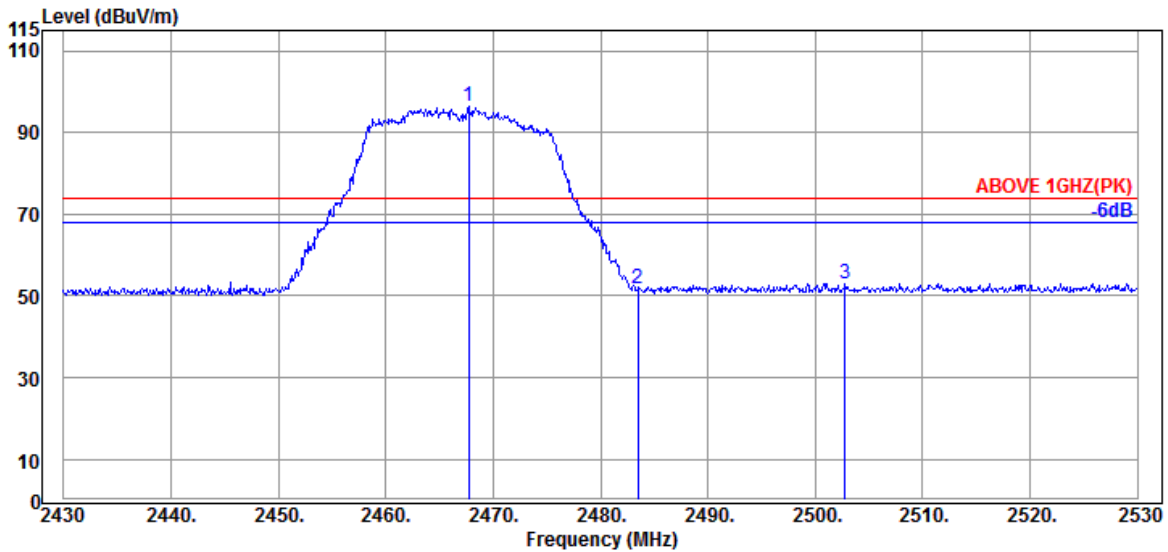

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.700	32.26	5.85	34.52	92.71	96.30	---	---	Peak
2483.500	32.43	5.87	34.53	47.91	51.68	74.00	22.32	Peak
2502.800	32.60	5.89	34.53	49.18	53.14	74.00	20.86	Peak

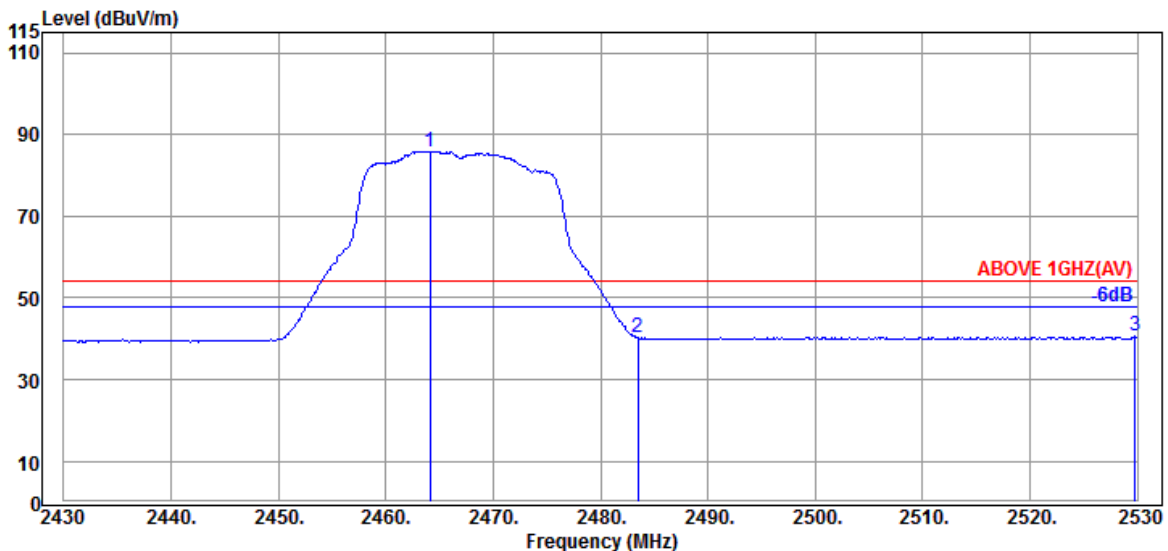


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	32.17	5.84	34.52	82.38	85.87	---	---	Average
2483.500	32.43	5.87	34.53	36.55	40.32	54.00	13.68	Average
2529.800	32.49	5.96	34.54	36.61	40.52	54.00	13.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

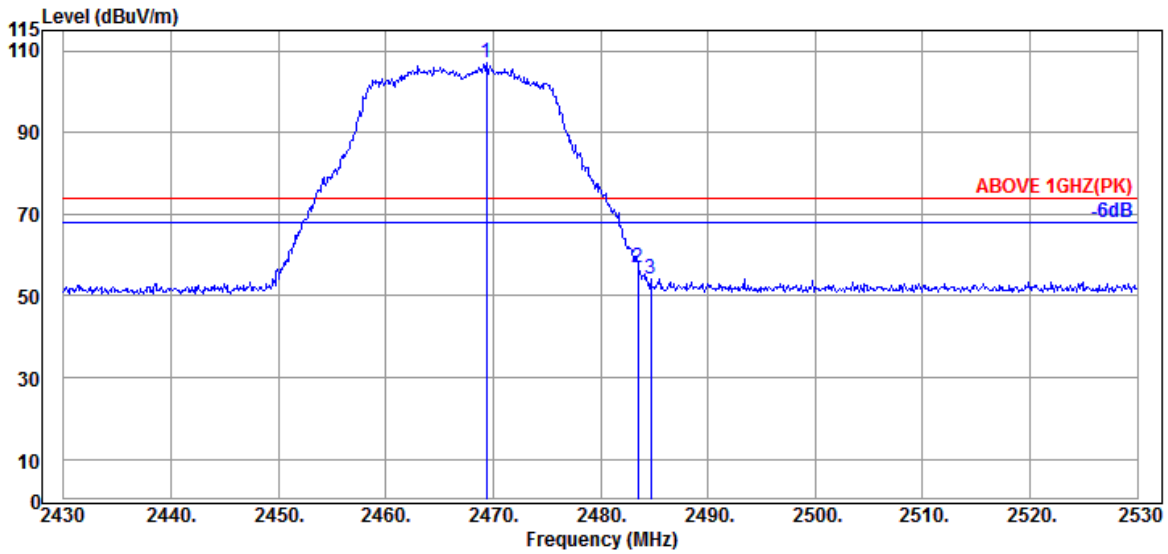

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	32.26	5.85	34.52	103.65	107.24	---	---	Peak
2483.500	32.43	5.87	34.53	53.20	56.97	74.00	17.03	Peak
2484.700	32.43	5.87	34.53	50.56	54.33	74.00	19.67	Peak

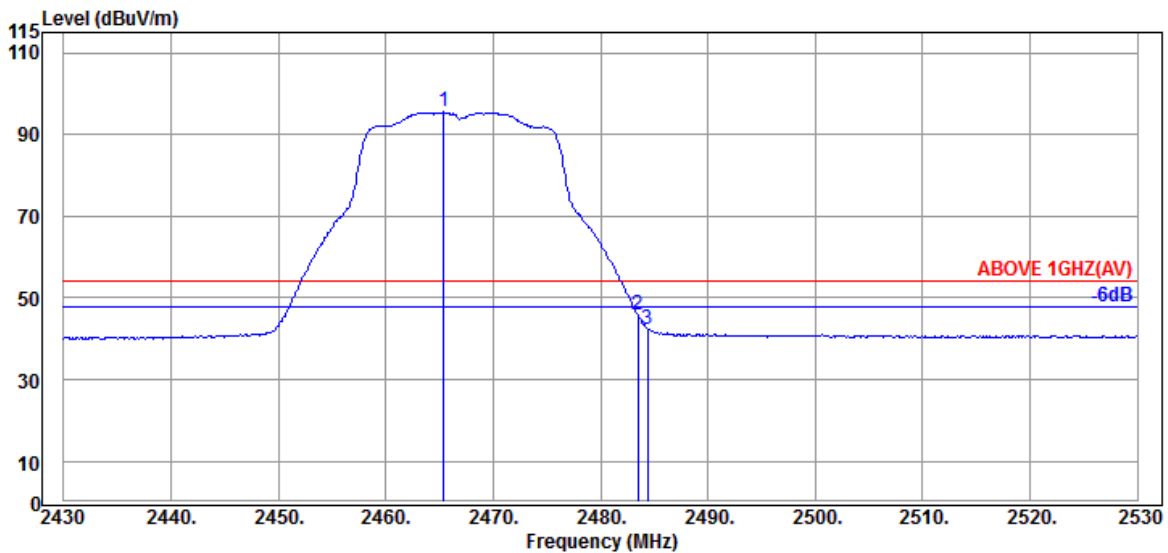


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	32.17	5.84	34.52	91.96	95.45	---	---	Average
2483.500	32.43	5.87	34.53	41.97	45.74	54.00	8.26	Average
2484.400	32.43	5.87	34.53	38.71	42.48	54.00	11.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

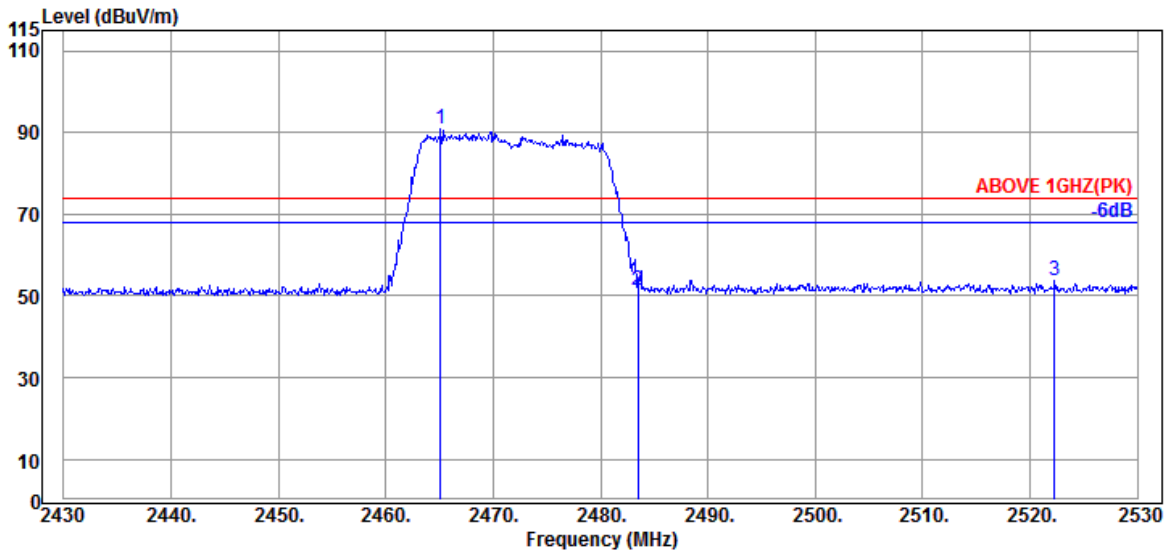

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.17	5.84	34.52	87.23	90.72	---	---	Peak
2483.500	32.43	5.87	34.53	47.64	51.41	74.00	22.59	Peak
2522.300	32.51	5.94	34.53	49.75	53.67	74.00	20.33	Peak

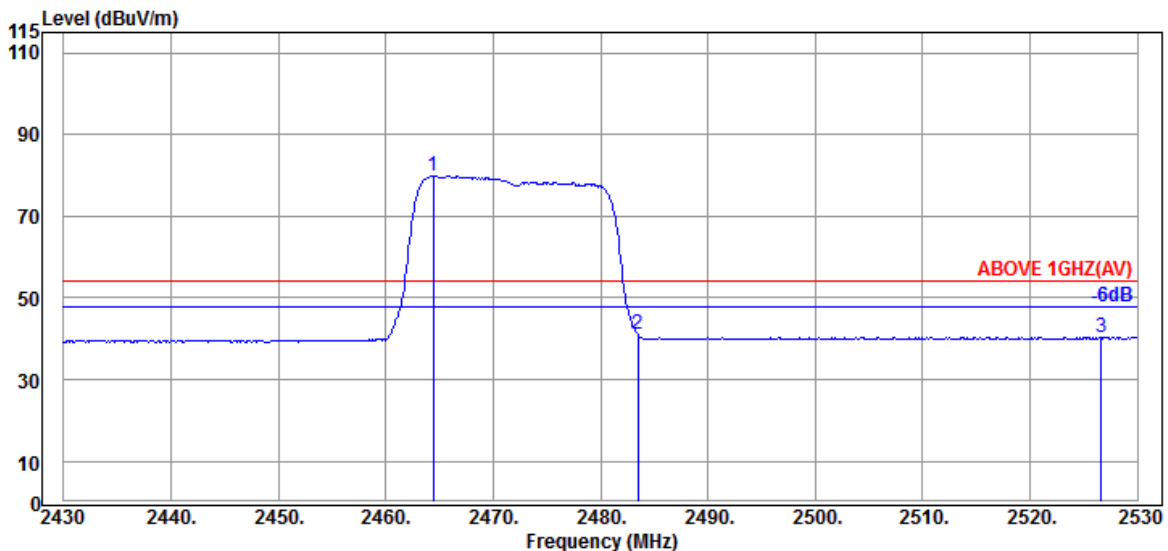


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	32.17	5.84	34.52	76.44	79.93	---	---	Average
2483.500	32.43	5.87	34.53	37.22	40.99	54.00	13.01	Average
2526.600	32.49	5.96	34.54	36.45	40.36	54.00	13.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

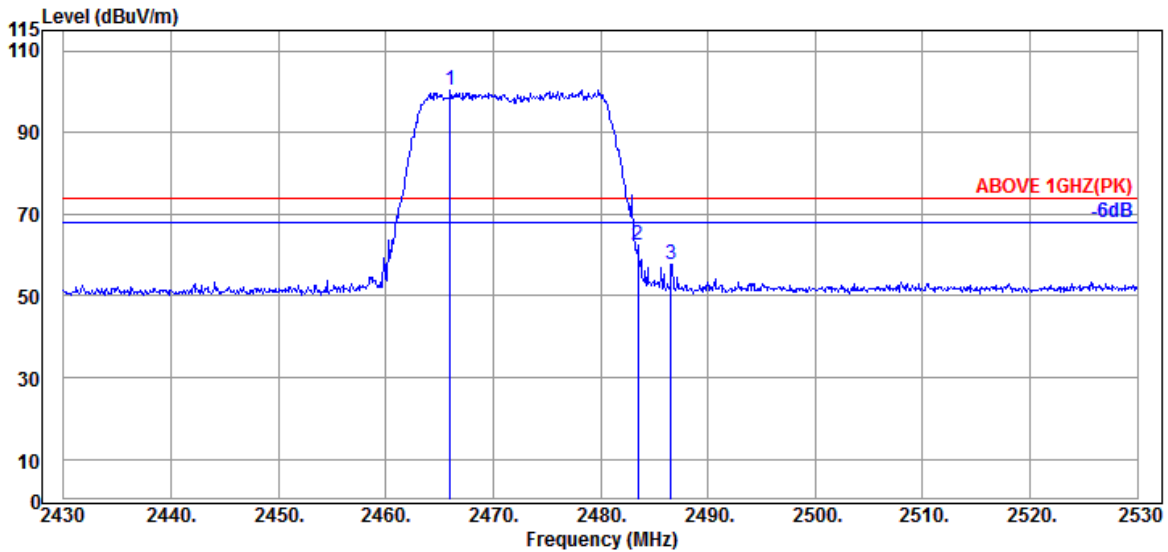

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.17	5.84	34.52	96.90	100.39	---	---	Peak
2483.500	32.43	5.87	34.53	58.49	62.26	74.00	11.74	Peak
2486.600	32.43	5.87	34.53	53.92	57.69	74.00	16.31	Peak

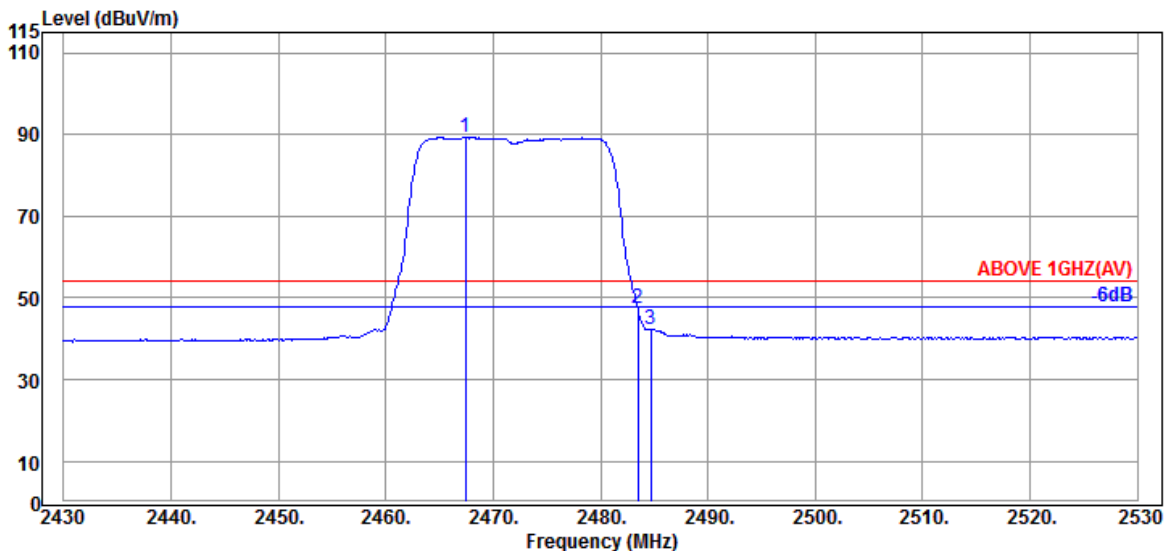


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.400	32.17	5.84	34.52	85.86	89.35	---	---	Average
2483.500	32.43	5.87	34.53	43.64	47.41	54.00	6.59	Average
2484.700	32.43	5.87	34.53	38.52	42.29	54.00	11.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

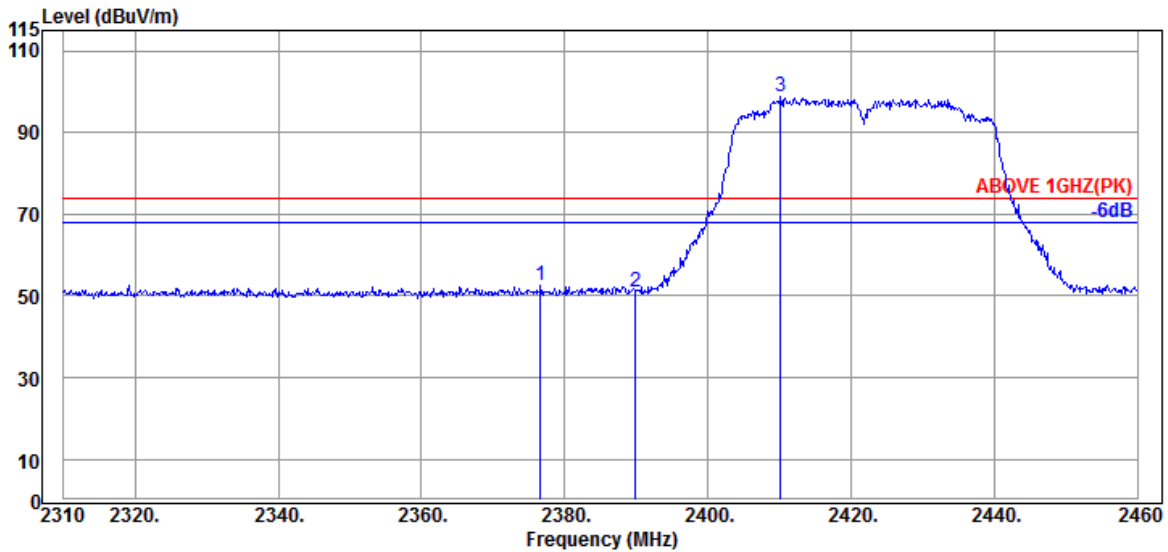

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2376.600	32.00	5.71	34.50	49.38	52.59	74.00	21.41	Peak
2389.950	32.00	5.72	34.51	47.94	51.15	74.00	22.85	Peak
@ 2410.200	32.00	5.75	34.51	95.41	98.65	---	---	Peak

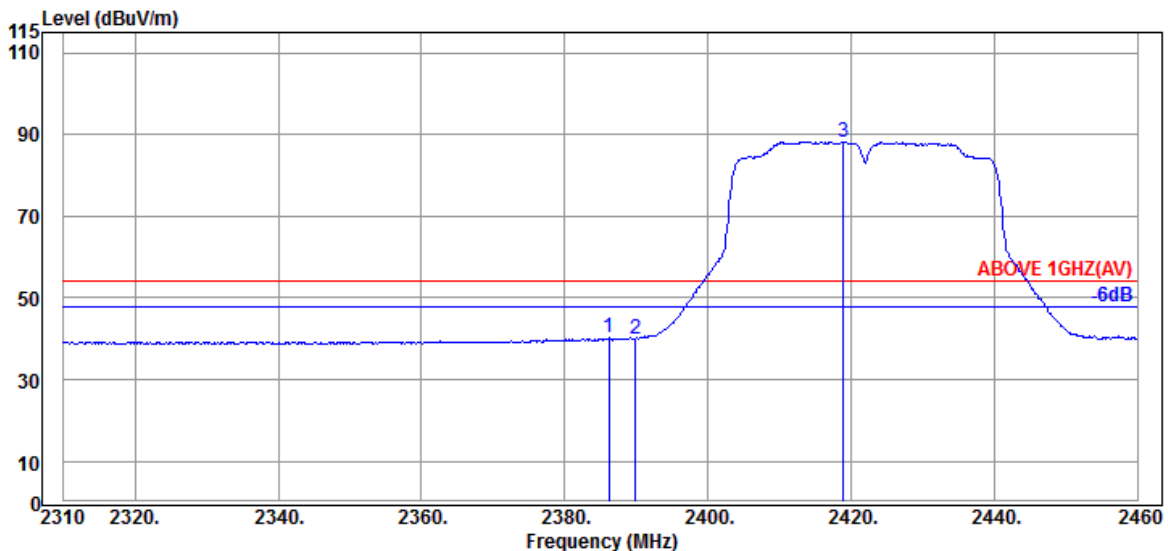


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	32.00	5.72	34.51	37.02	40.23	54.00	13.77	Average
2389.950	32.00	5.72	34.51	36.87	40.08	54.00	13.92	Average
@ 2418.900	32.00	5.77	34.51	85.02	88.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

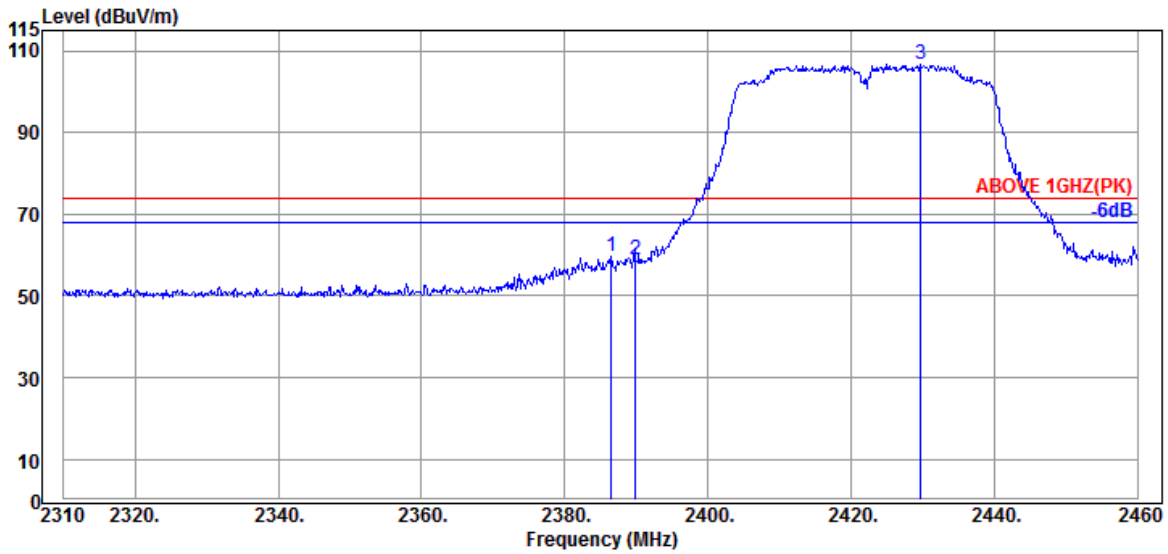

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	32.00	5.72	34.51	56.29	59.50	74.00	14.50	Peak
2389.950	32.00	5.72	34.51	55.51	58.72	74.00	15.28	Peak
@ 2429.700	32.00	5.78	34.52	103.50	106.76	---	---	Peak

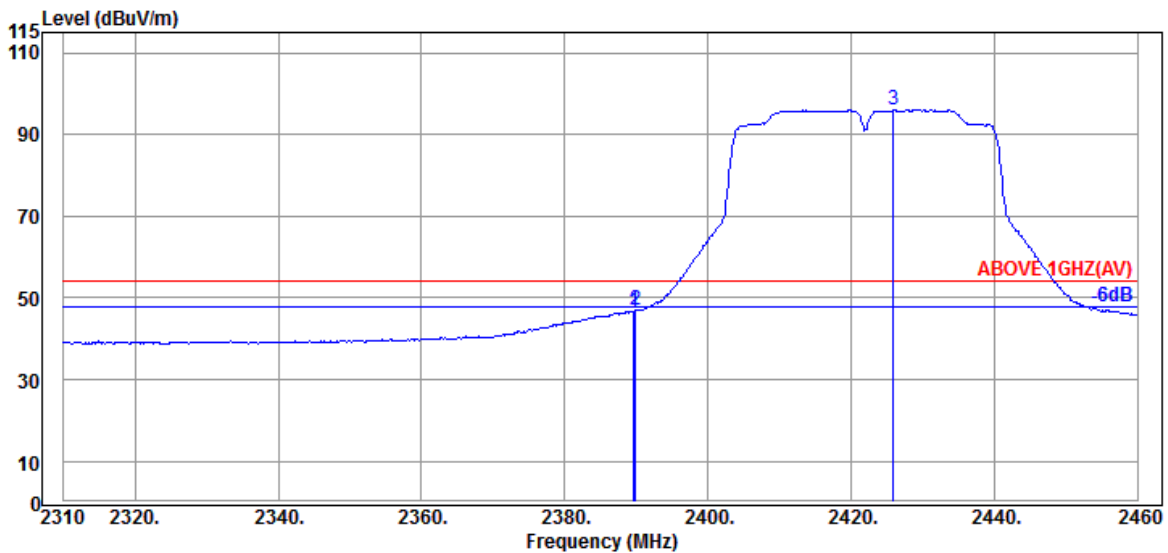


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	32.00	5.72	34.51	43.44	46.65	54.00	7.35	Average
2389.950	32.00	5.72	34.51	43.80	47.01	54.00	6.99	Average
@ 2425.950	32.00	5.78	34.51	92.88	96.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

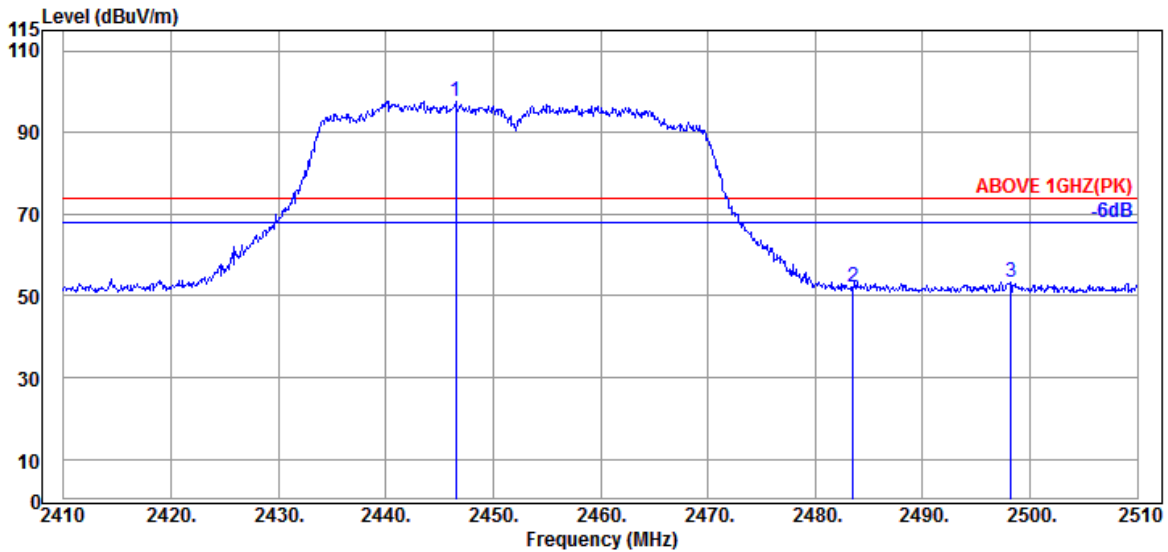

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	32.00	5.81	34.52	94.37	97.66	---	---	Peak
2483.500	32.43	5.87	34.53	48.26	52.03	74.00	21.97	Peak
2498.200	32.60	5.89	34.53	49.32	53.28	74.00	20.72	Peak

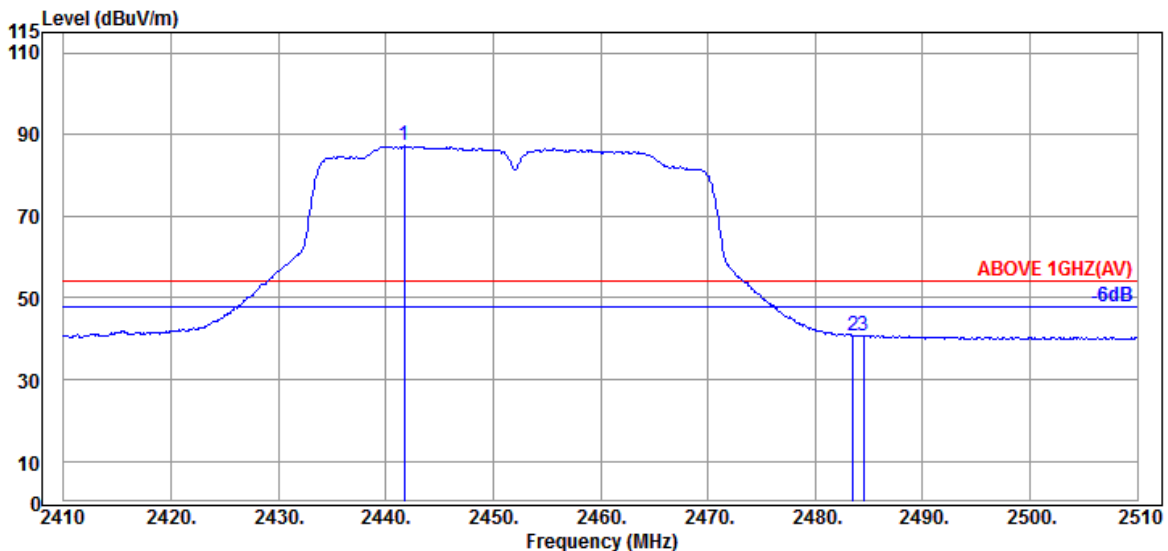


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2441.700	32.00	5.80	34.52	83.91	87.19	---	---	Average
2483.500	32.43	5.87	34.53	37.12	40.89	54.00	13.11	Average
2484.500	32.43	5.87	34.53	37.05	40.82	54.00	13.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

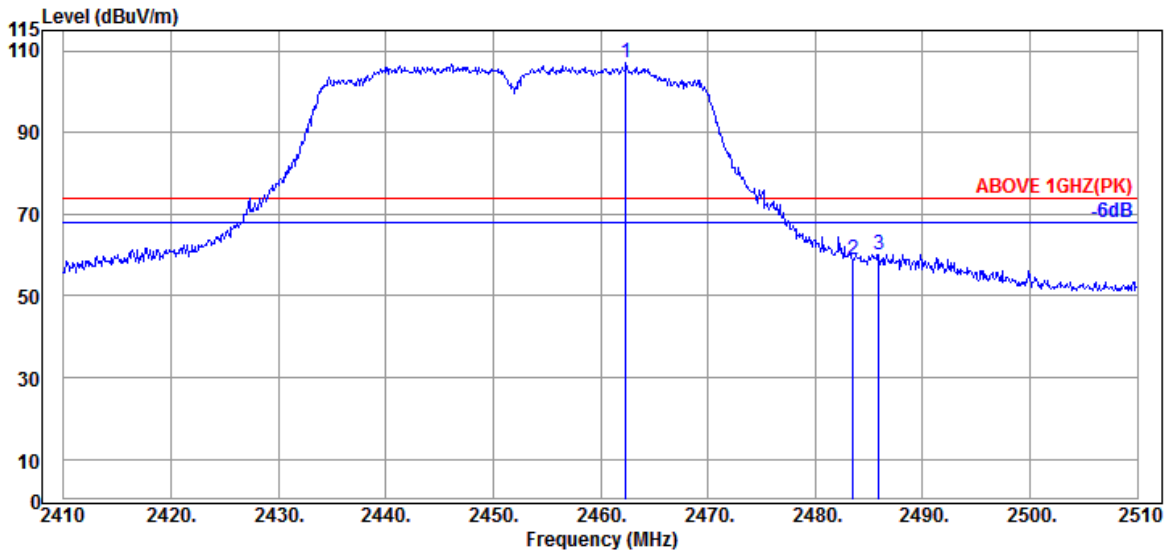

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.400	32.17	5.84	34.52	103.45	106.94	---	---	Peak
2483.500	32.43	5.87	34.53	55.11	58.88	74.00	15.12	Peak
2485.900	32.43	5.87	34.53	56.38	60.15	74.00	13.85	Peak

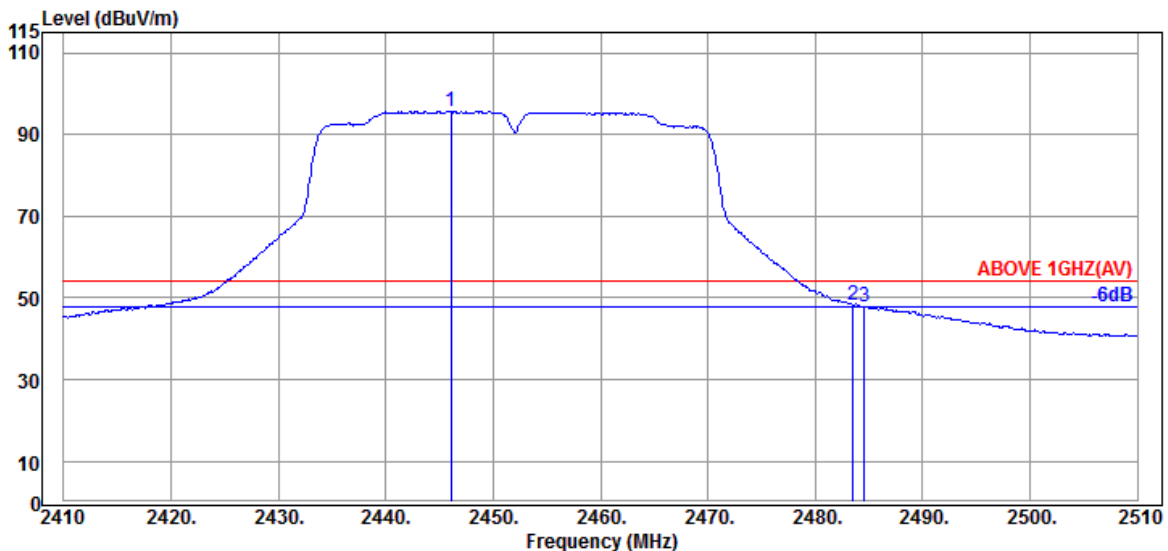


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.100	32.00	5.80	34.52	92.46	95.74	---	---	Average
2483.500	32.43	5.87	34.53	44.64	48.41	54.00	5.59	Average
2484.600	32.43	5.87	34.53	44.22	47.99	54.00	6.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

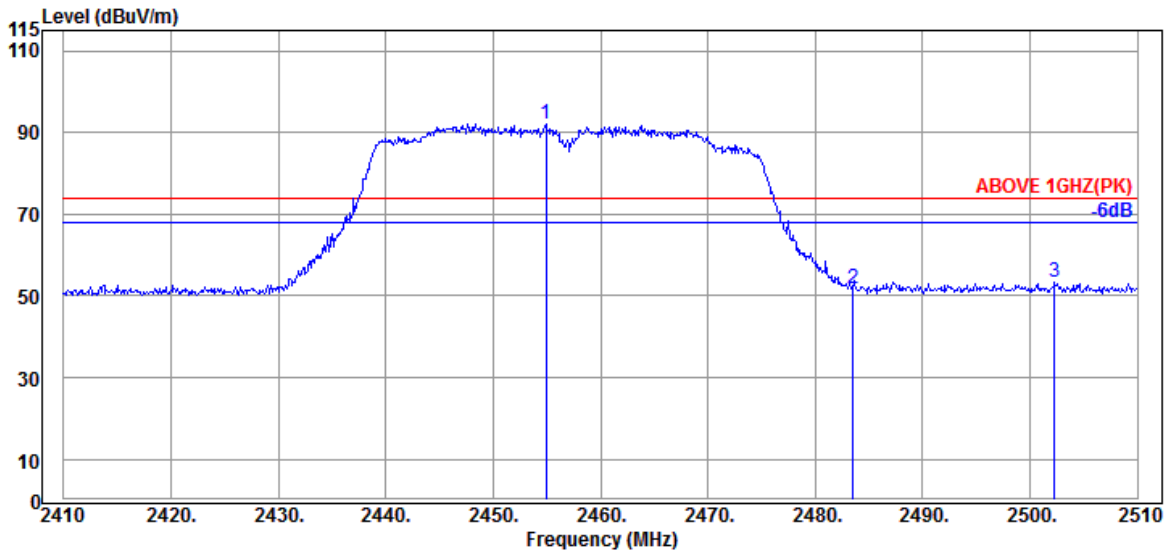

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.900	32.09	5.83	34.52	88.56	91.96	---	---	Peak
2483.500	32.43	5.87	34.53	48.03	51.80	74.00	22.20	Peak
2502.300	32.60	5.89	34.53	49.40	53.36	74.00	20.64	Peak

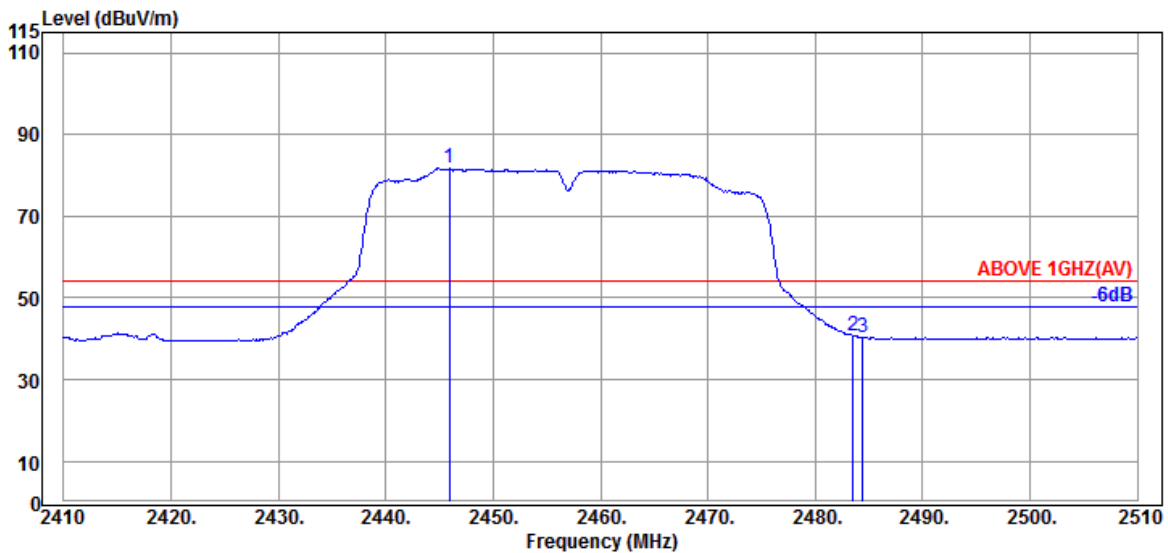


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.900	32.00	5.80	34.52	78.41	81.69	---	---	Average
2483.500	32.43	5.87	34.53	37.08	40.85	54.00	13.15	Average
2484.400	32.43	5.87	34.53	36.60	40.37	54.00	13.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

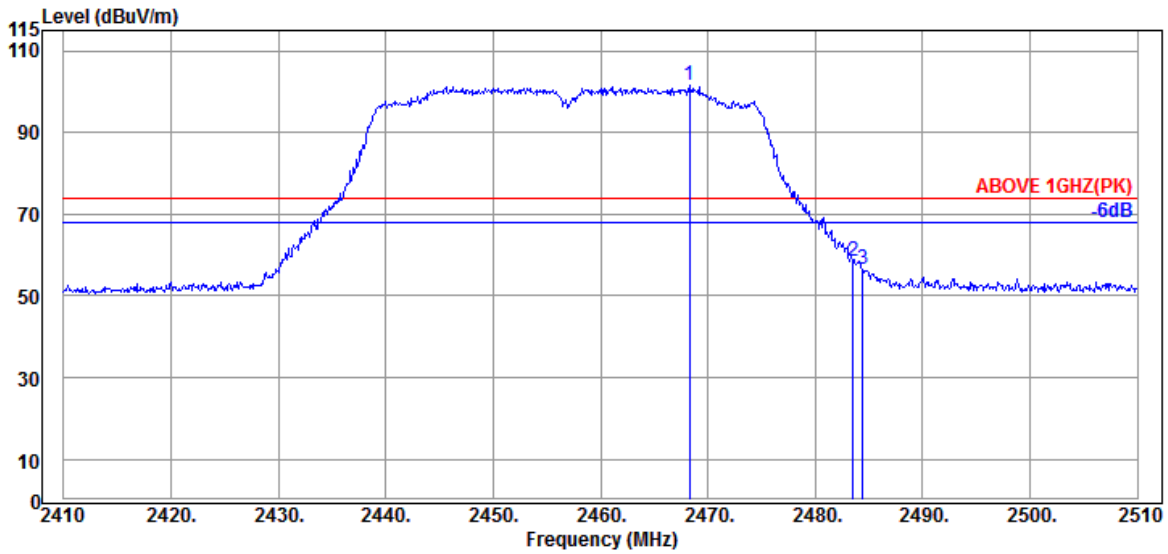

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.300	32.26	5.85	34.52	97.79	101.38	---	---	Peak
2483.500	32.43	5.87	34.53	54.53	58.30	74.00	15.70	Peak
2484.400	32.43	5.87	34.53	52.64	56.41	74.00	17.59	Peak

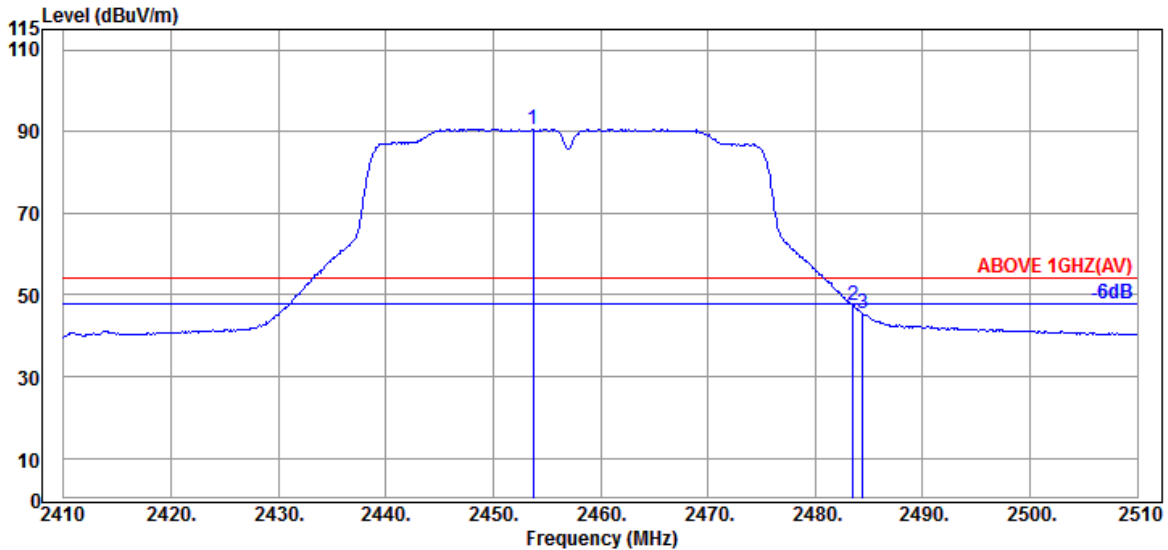


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.700	32.09	5.83	34.52	87.18	90.58	---	---	Average
2483.500	32.43	5.87	34.53	43.69	47.46	54.00	6.54	Average
2484.400	32.43	5.87	34.53	41.71	45.48	54.00	8.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

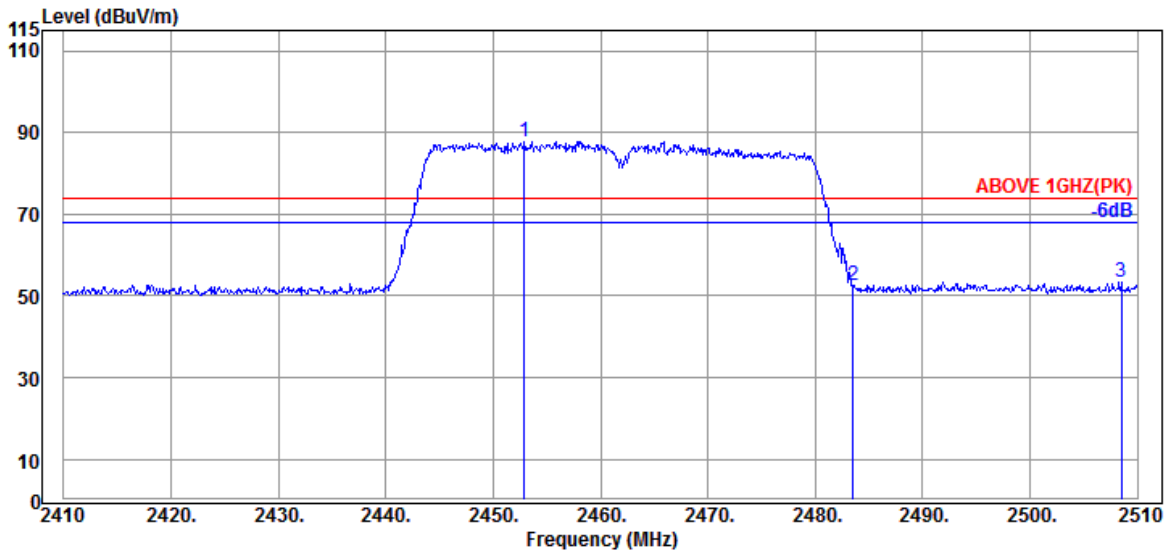

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.900	32.00	5.81	34.52	84.54	87.83	---	---	Peak
2483.500	32.43	5.87	34.53	48.91	52.68	74.00	21.32	Peak
2508.500	32.57	5.91	34.53	49.32	53.27	74.00	20.73	Peak

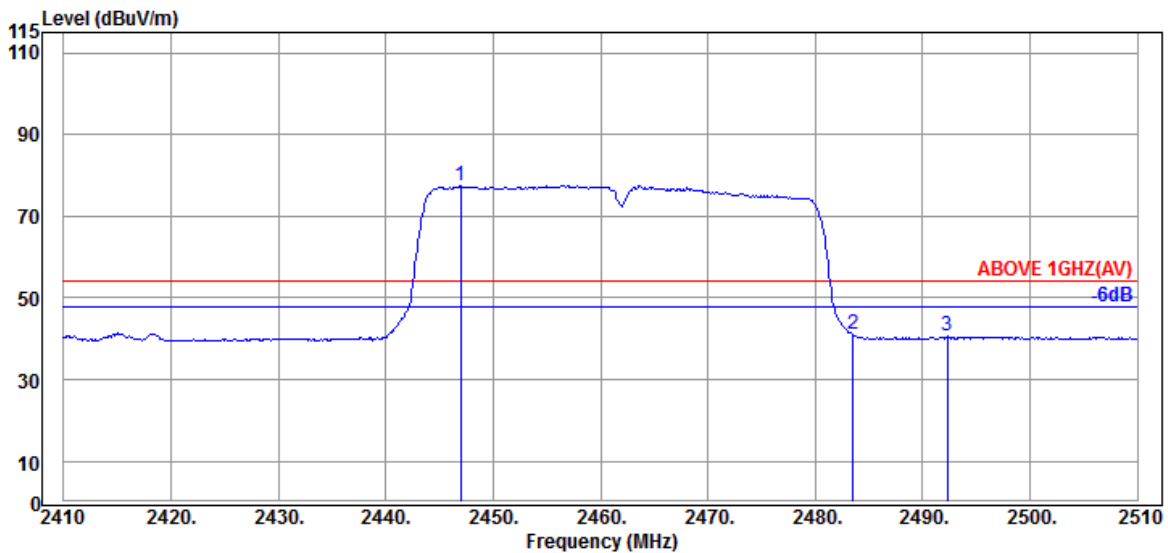


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.000	32.00	5.81	34.52	74.13	77.42	---	---	Average
2483.500	32.43	5.87	34.53	37.22	40.99	54.00	13.01	Average
2492.300	32.51	5.88	34.53	36.69	40.55	54.00	13.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

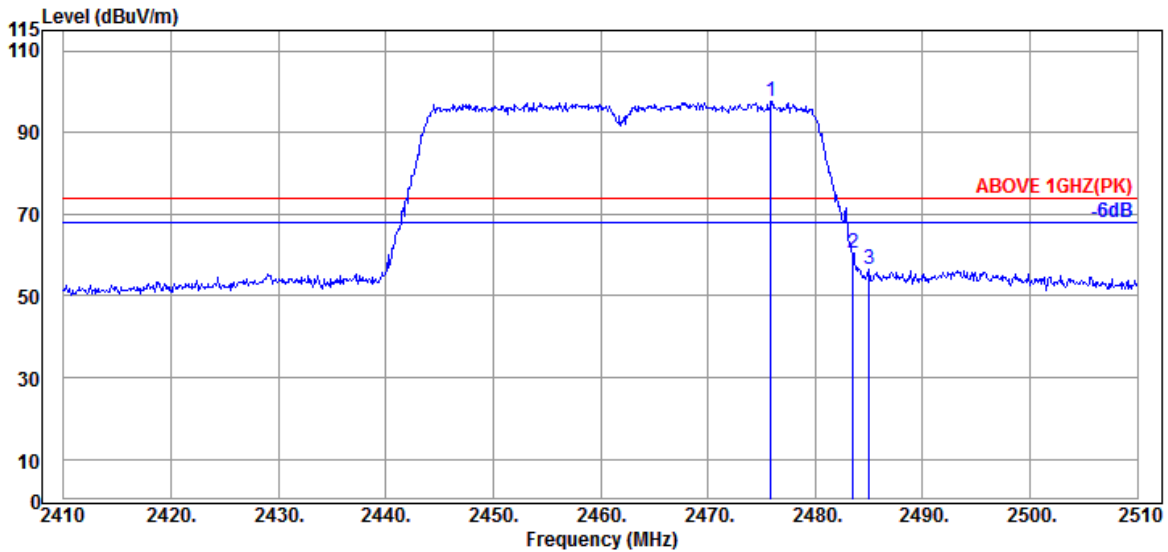

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.900	32.34	5.86	34.53	93.82	97.49	---	---	Peak
2483.500	32.43	5.87	34.53	56.58	60.35	74.00	13.65	Peak
2485.000	32.43	5.87	34.53	52.72	56.49	74.00	17.51	Peak

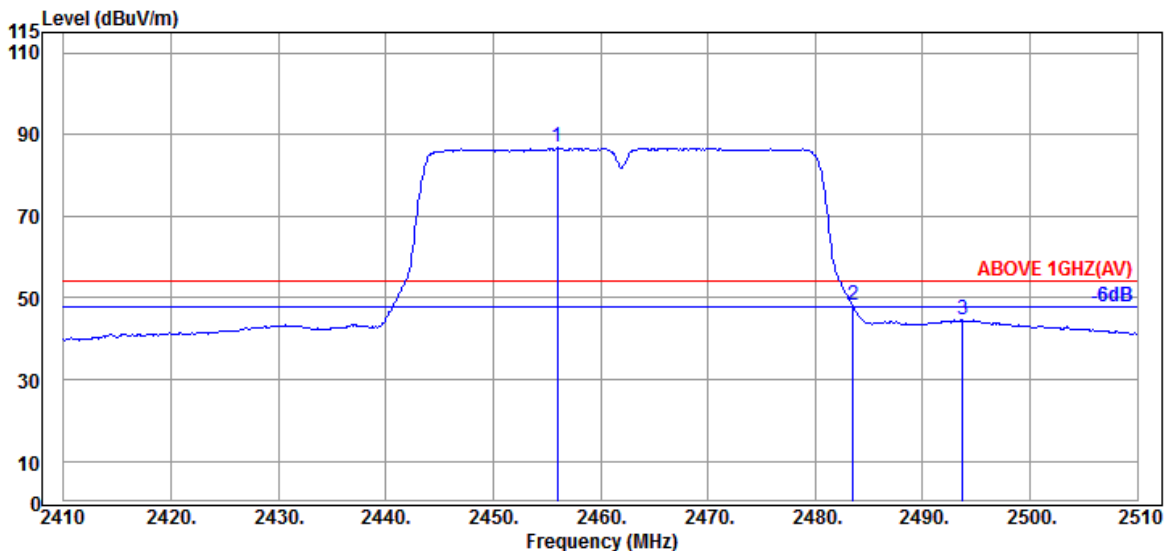


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.09	5.83	34.52	83.41	86.81	---	---	Average
2483.500	32.43	5.87	34.53	44.44	48.21	54.00	5.79	Average
2493.700	32.51	5.88	34.53	40.67	44.53	54.00	9.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

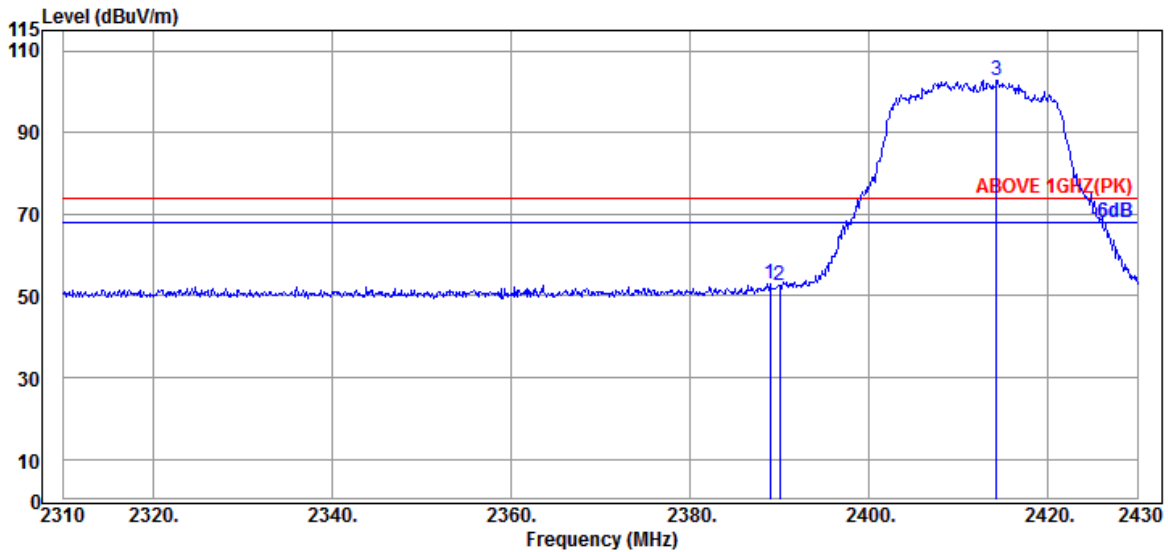

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	32.00	5.72	34.51	49.67	52.88	74.00	21.12	Peak
2390.040	32.00	5.72	34.51	49.16	52.37	74.00	21.63	Peak
@ 2414.280	32.00	5.76	34.51	99.66	102.91	---	---	Peak

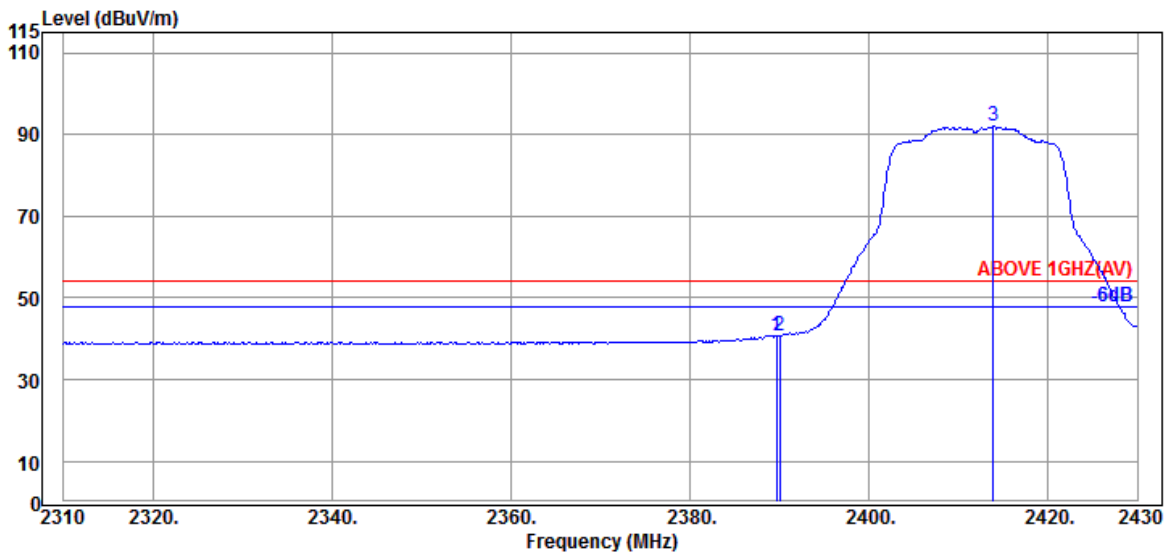


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	37.64	40.85	54.00	13.15	Average
2390.040	32.00	5.72	34.51	37.50	40.71	54.00	13.29	Average
@ 2413.920	32.00	5.76	34.51	88.70	91.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

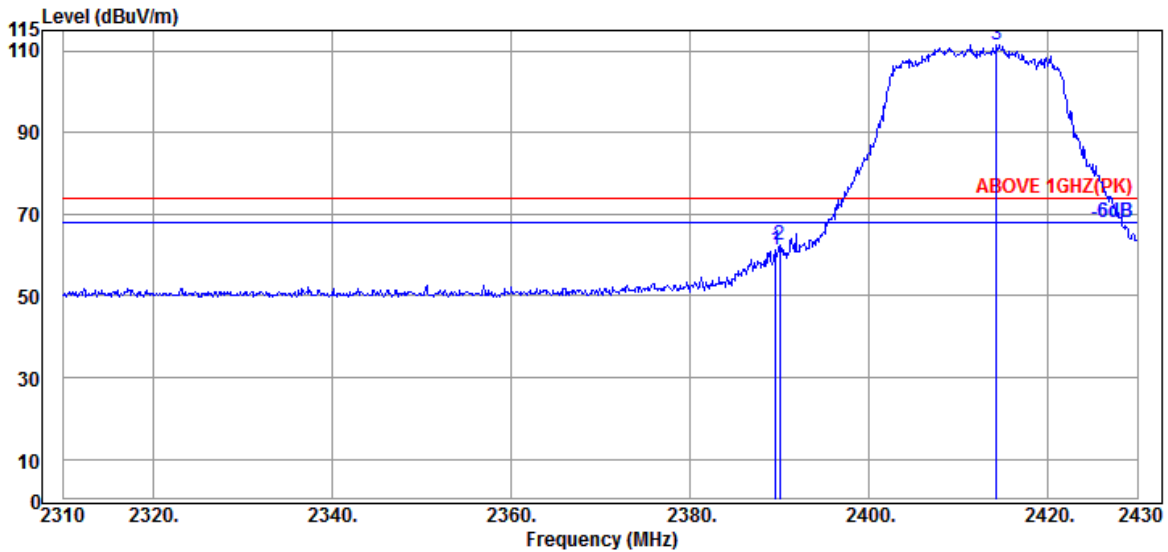

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	32.00	5.72	34.51	58.10	61.31	74.00	12.69	Peak
2390.040	32.00	5.72	34.51	59.37	62.58	74.00	11.42	Peak
@ 2414.280	32.00	5.76	34.51	108.30	111.55	---	---	Peak

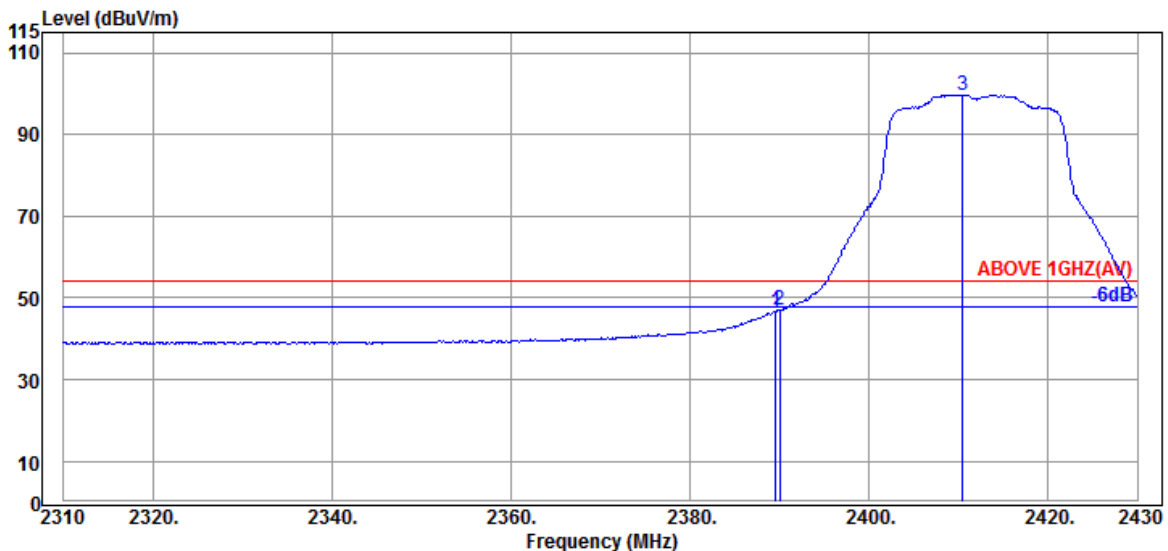


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	32.00	5.72	34.51	43.46	46.67	54.00	7.33	Average
2390.040	32.00	5.72	34.51	43.81	47.02	54.00	6.98	Average
@ 2410.440	32.00	5.75	34.51	96.50	99.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

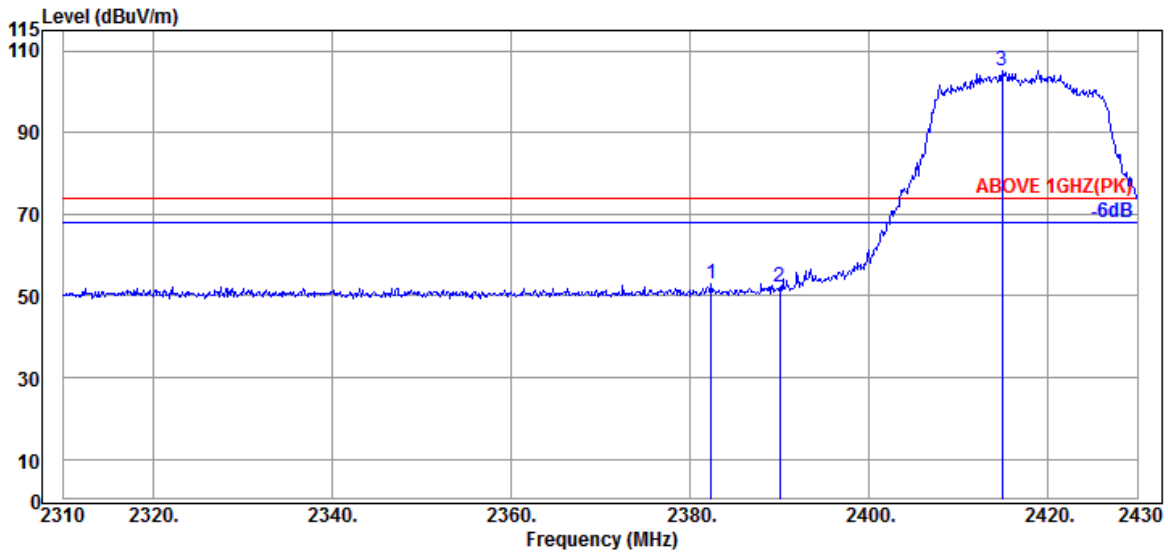

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.360	32.00	5.71	34.51	49.77	52.97	74.00	21.03	Peak
2390.040	32.00	5.72	34.51	49.07	52.28	74.00	21.72	Peak
@ 2414.880	32.00	5.76	34.51	101.80	105.05	---	---	Peak

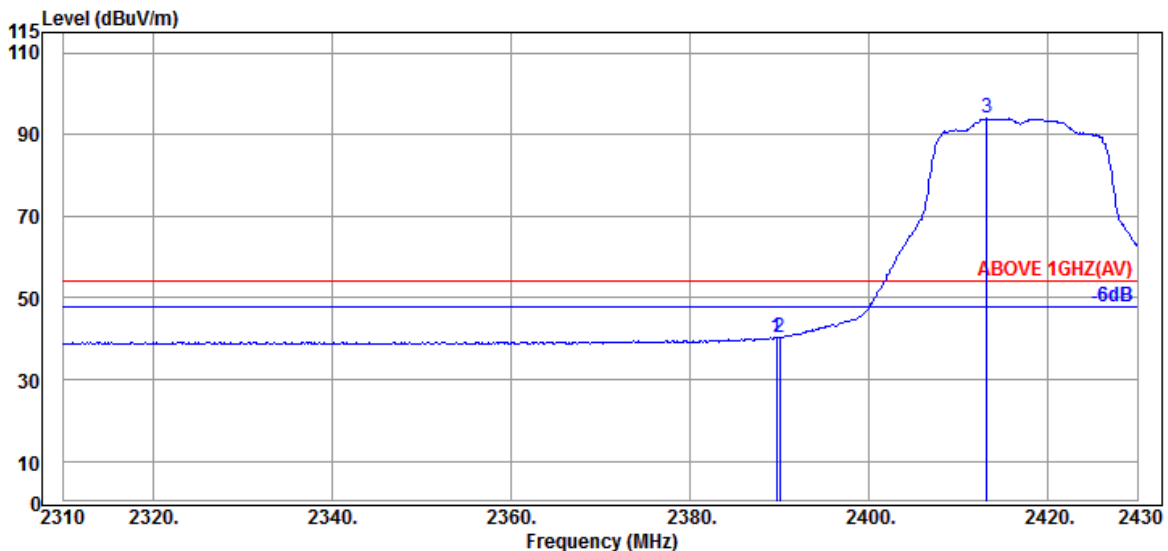


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	37.04	40.25	54.00	13.75	Average
2390.040	32.00	5.72	34.51	37.02	40.23	54.00	13.77	Average
@ 2413.200	32.00	5.76	34.51	90.66	93.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

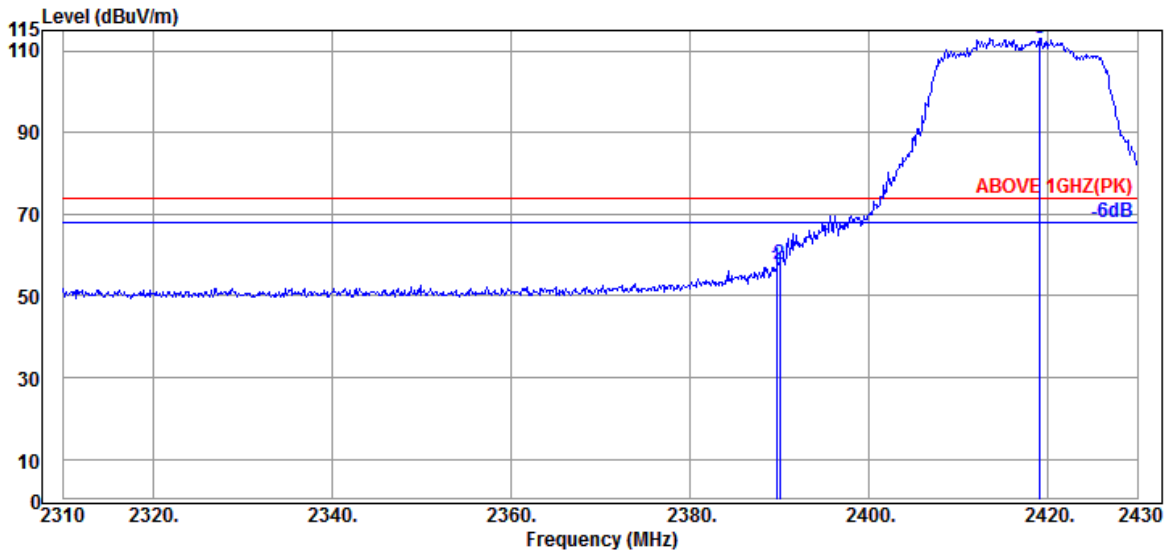

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	53.89	57.10	74.00	16.90	Peak
2390.040	32.00	5.72	34.51	54.38	57.59	74.00	16.41	Peak
@ 2419.080	32.00	5.77	34.51	109.91	113.17	---	---	Peak

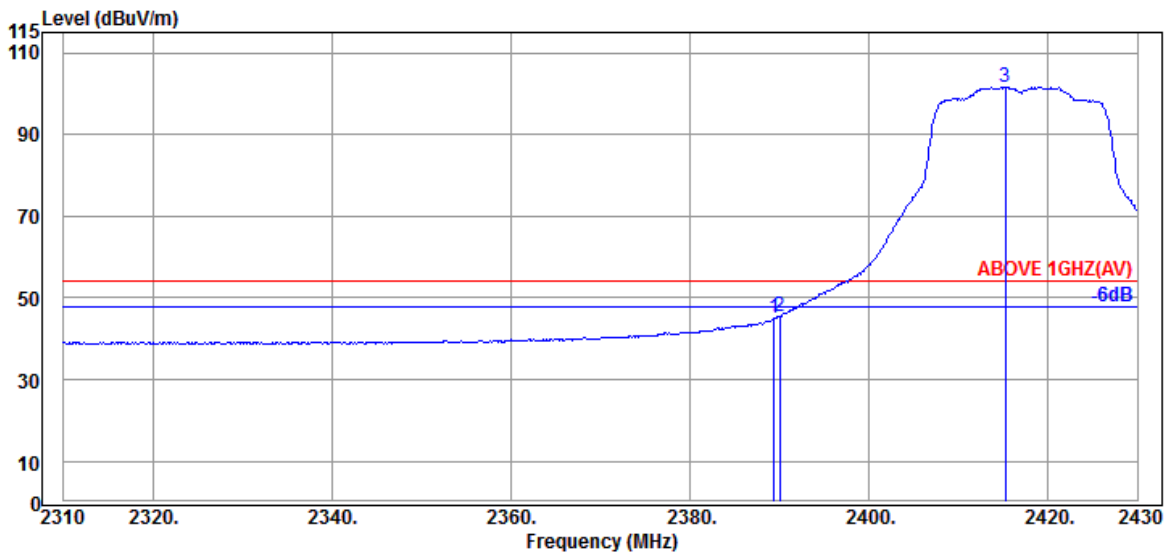


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	32.00	5.72	34.51	41.87	45.08	54.00	8.92	Average
2390.040	32.00	5.72	34.51	42.36	45.57	54.00	8.43	Average
@ 2415.240	32.00	5.76	34.51	98.28	101.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

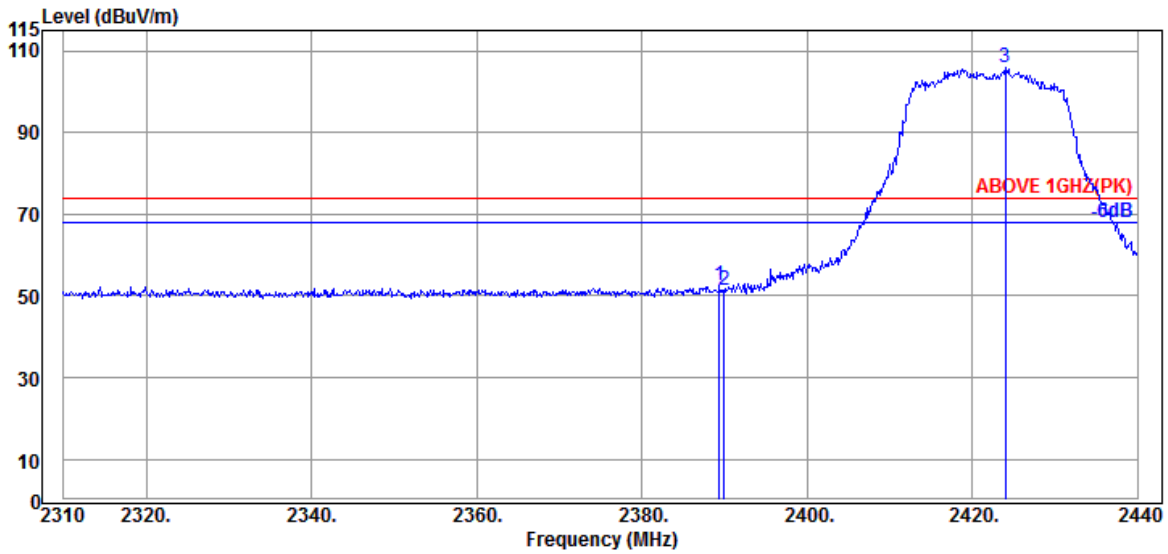

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.430	32.00	5.72	34.51	49.37	52.58	74.00	21.42	Peak
2389.950	32.00	5.72	34.51	48.35	51.56	74.00	22.44	Peak
@ 2424.010	32.00	5.77	34.51	102.76	106.02	---	---	Peak

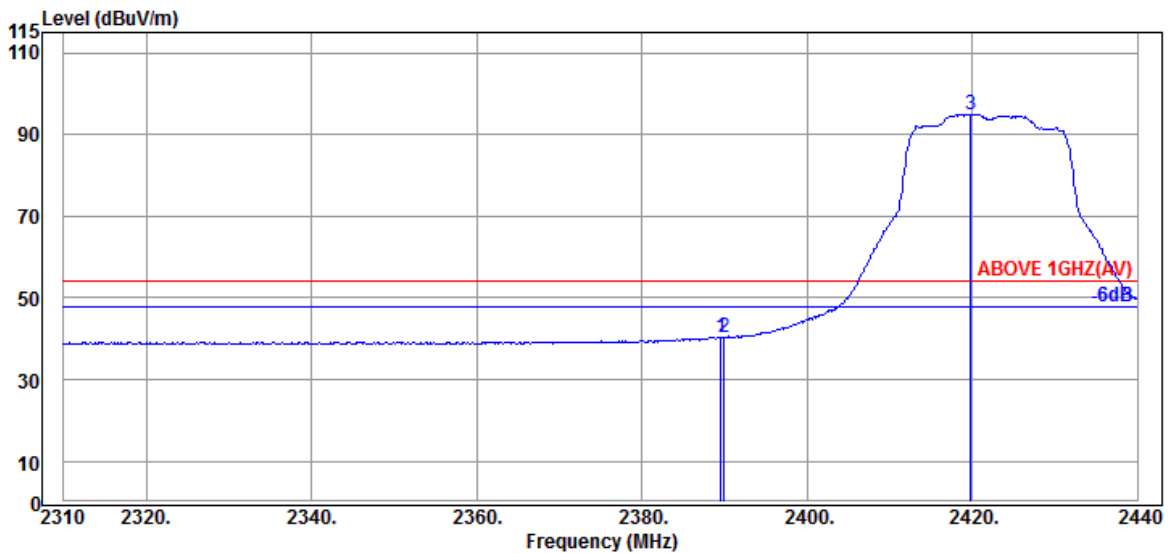


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.560	32.00	5.72	34.51	37.21	40.42	54.00	13.58	Average
2389.950	32.00	5.72	34.51	37.14	40.35	54.00	13.65	Average
@ 2419.850	32.00	5.77	34.51	91.73	94.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

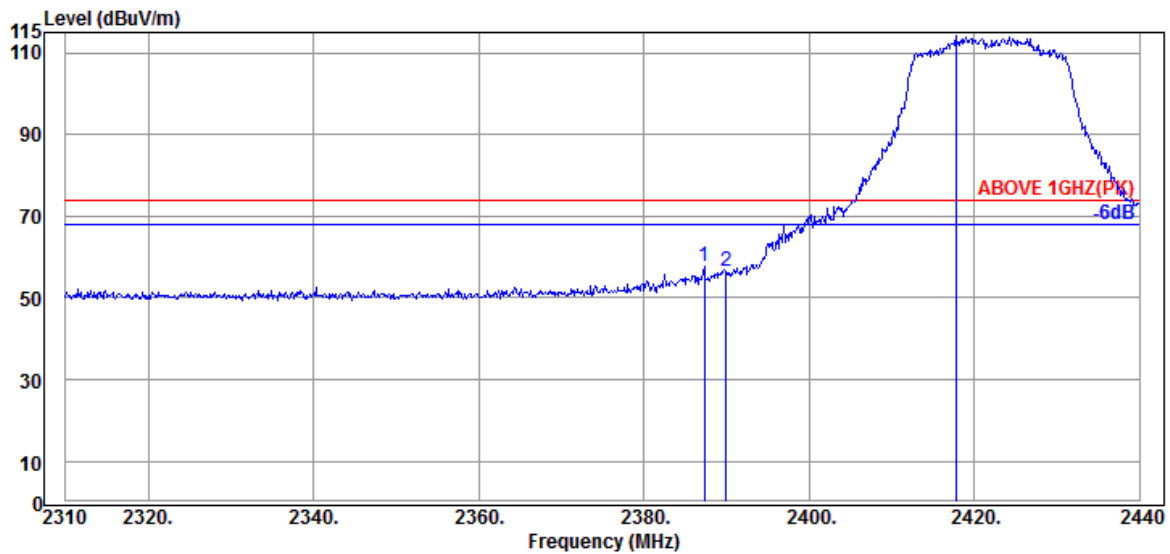

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.350	32.00	5.72	34.51	54.35	57.56	74.00	16.44	Peak
2389.950	32.00	5.72	34.51	53.31	56.52	74.00	17.48	Peak
@ 2417.770	32.00	5.76	34.51	110.85	114.10	---	---	Peak

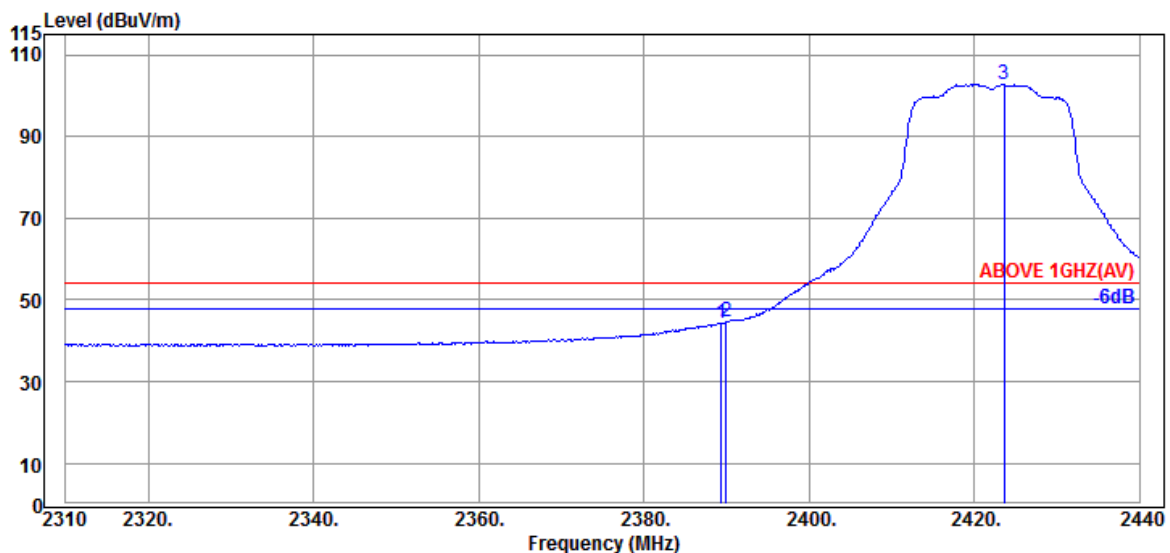


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.430	32.00	5.72	34.51	41.23	44.44	54.00	9.56	Average
2389.950	32.00	5.72	34.51	41.28	44.49	54.00	9.51	Average
@ 2423.620	32.00	5.77	34.51	99.45	102.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

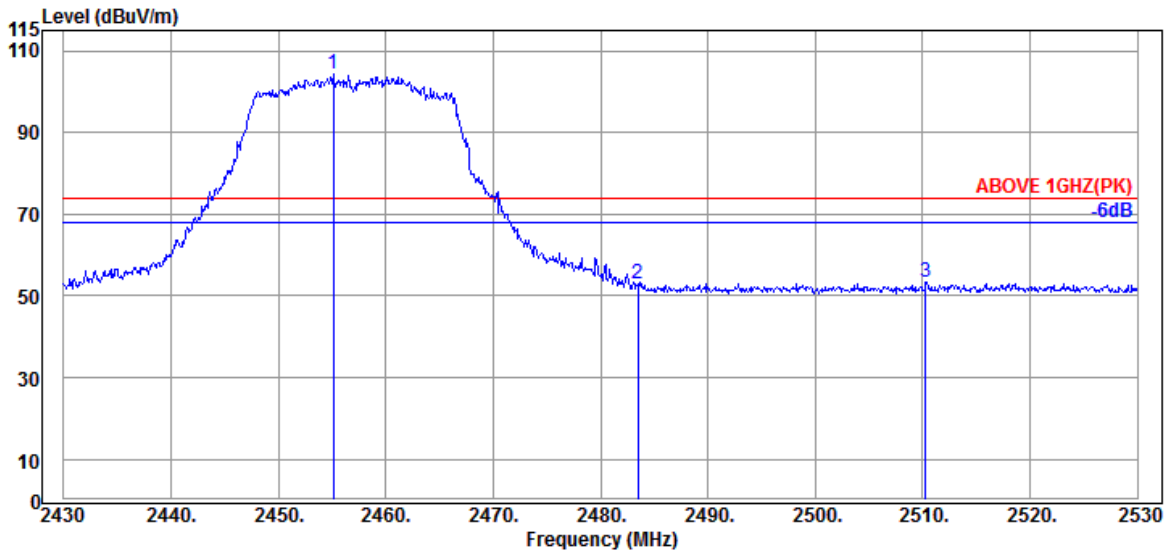

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.100	32.09	5.83	34.52	100.79	104.19	---	---	Peak
2483.500	32.43	5.87	34.53	49.04	52.81	74.00	21.19	Peak
2510.300	32.57	5.91	34.53	49.57	53.52	74.00	20.48	Peak

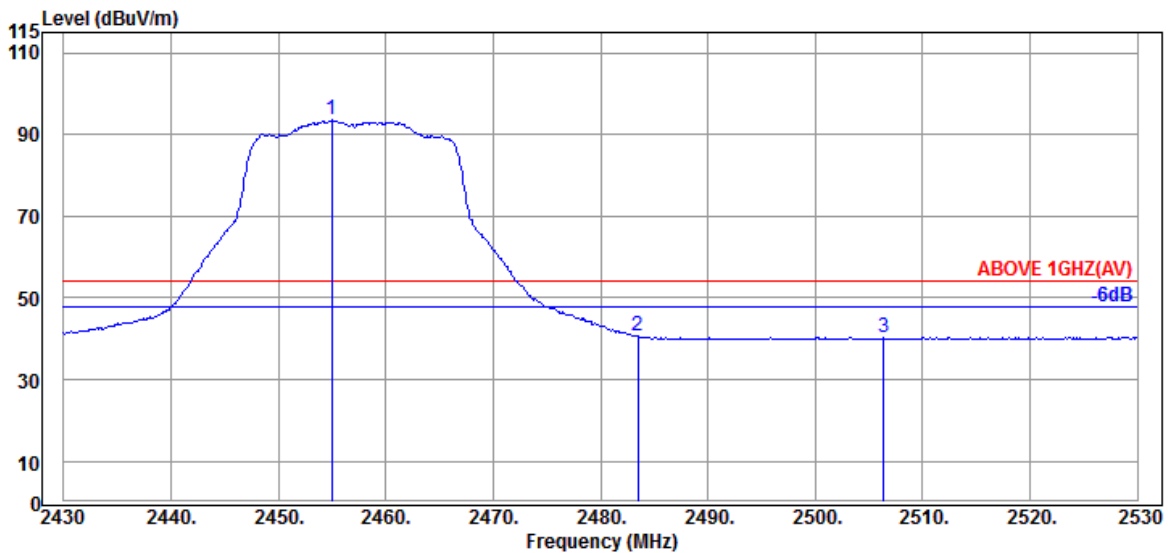


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.09	5.83	34.52	90.06	93.46	---	---	Average
2483.500	32.43	5.87	34.53	36.85	40.62	54.00	13.38	Average
2506.400	32.57	5.91	34.53	36.38	40.33	54.00	13.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

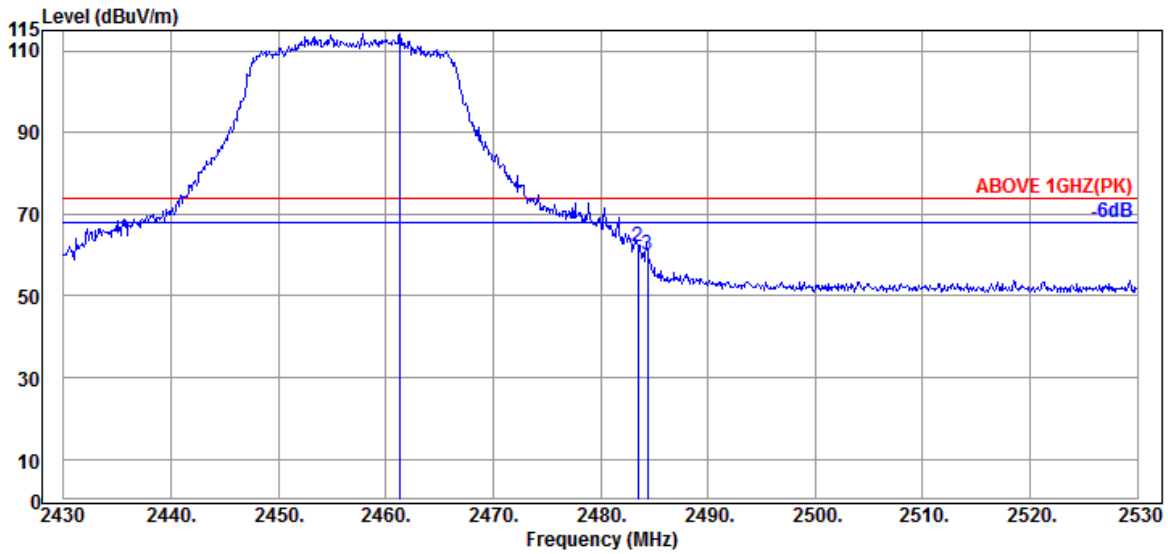

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	32.17	5.84	34.52	110.85	114.34	---	---	Peak
2483.500	32.43	5.87	34.53	58.45	62.22	74.00	11.78	Peak
2484.400	32.43	5.87	34.53	56.14	59.91	74.00	14.09	Peak

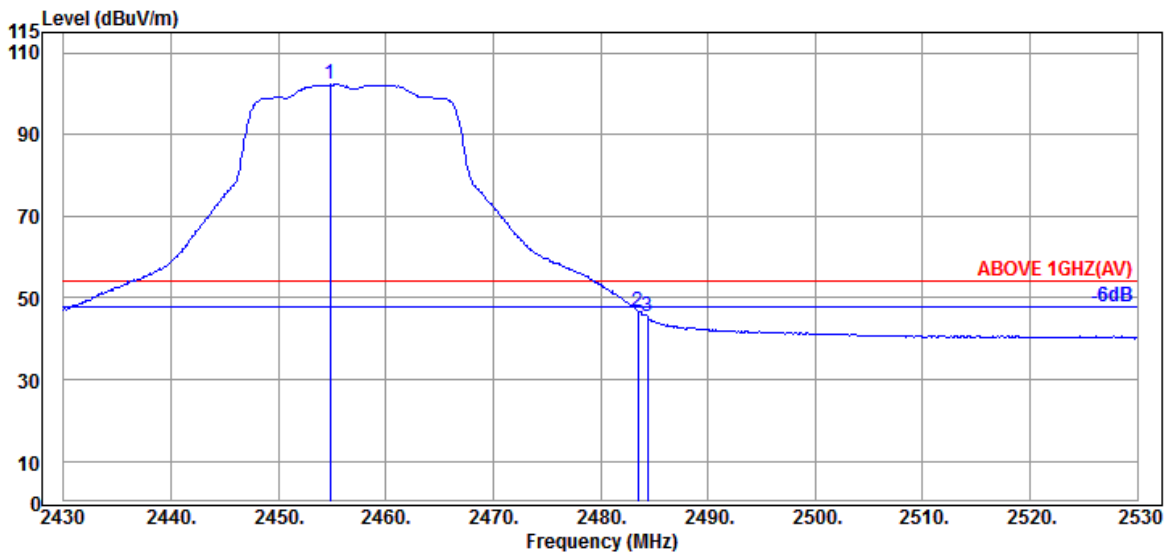


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.800	32.09	5.83	34.52	98.91	102.31	---	---	Average
2483.500	32.43	5.87	34.53	43.00	46.77	54.00	7.23	Average
2484.400	32.43	5.87	34.53	41.53	45.30	54.00	8.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

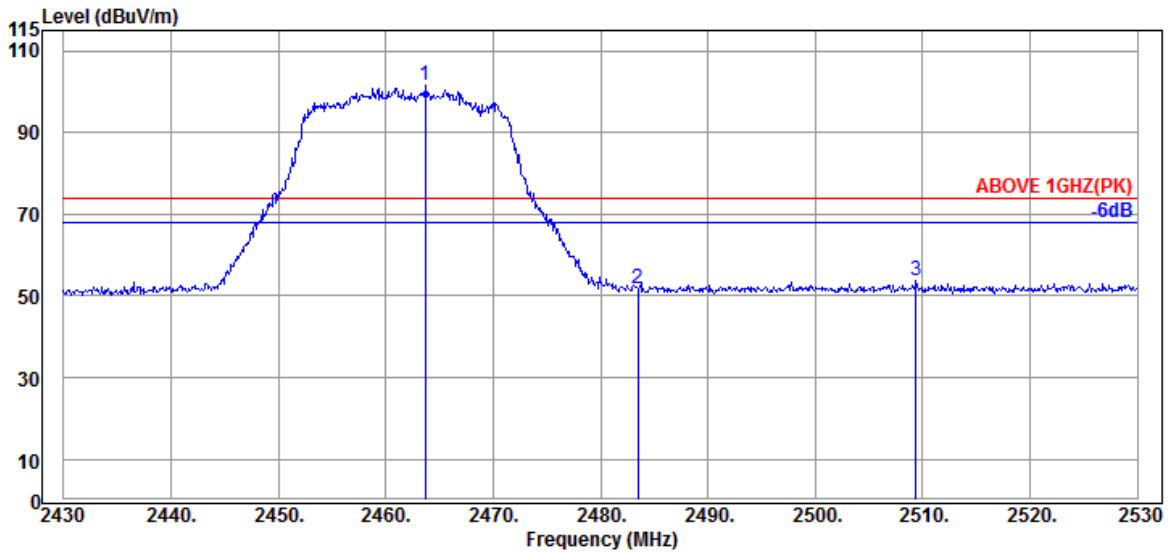

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.700	32.17	5.84	34.52	98.09	101.58	---	---	Peak
2483.500	32.43	5.87	34.53	47.92	51.69	74.00	22.31	Peak
2509.400	32.57	5.91	34.53	49.61	53.56	74.00	20.44	Peak

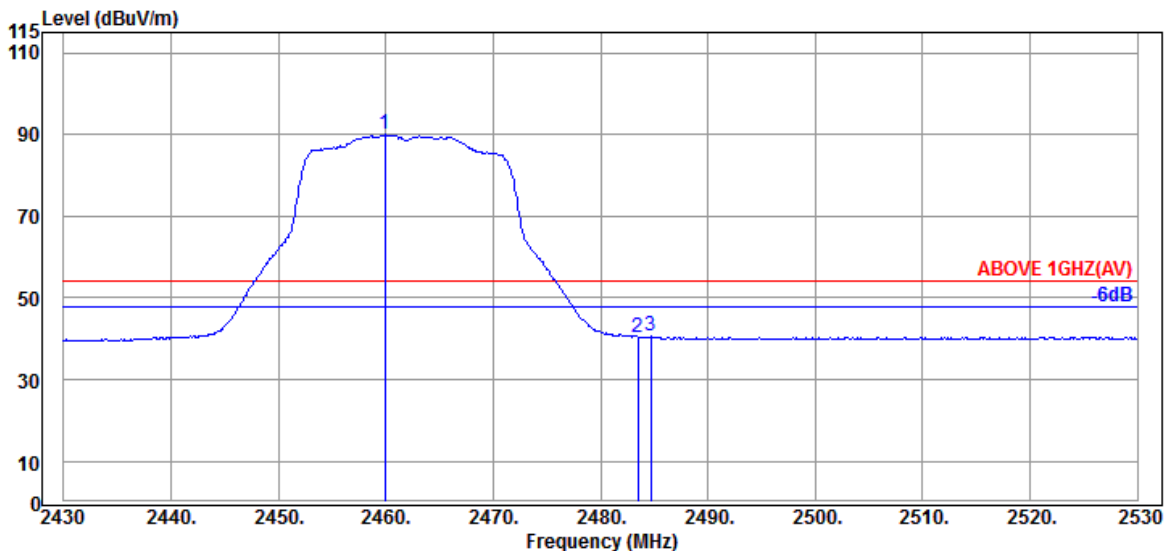


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.900	32.09	5.83	34.52	86.51	89.91	---	---	Average
2483.500	32.43	5.87	34.53	36.63	40.40	54.00	13.60	Average
2484.700	32.43	5.87	34.53	36.92	40.69	54.00	13.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

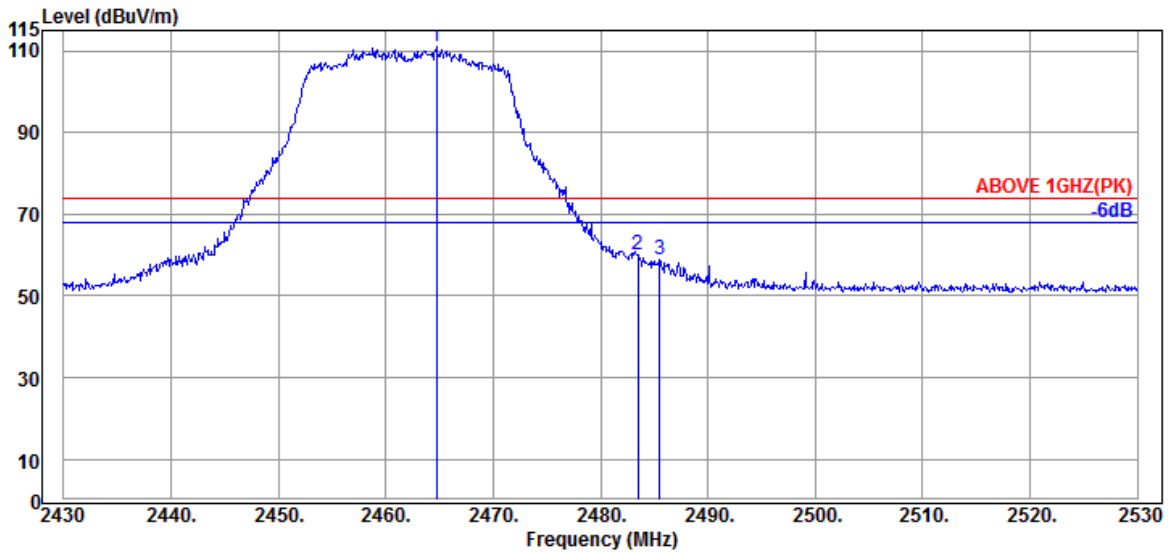

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	32.17	5.84	34.52	107.42	110.91	---	---	Peak
2483.500	32.43	5.87	34.53	56.44	60.21	74.00	13.79	Peak
2485.500	32.43	5.87	34.53	55.09	58.86	74.00	15.14	Peak

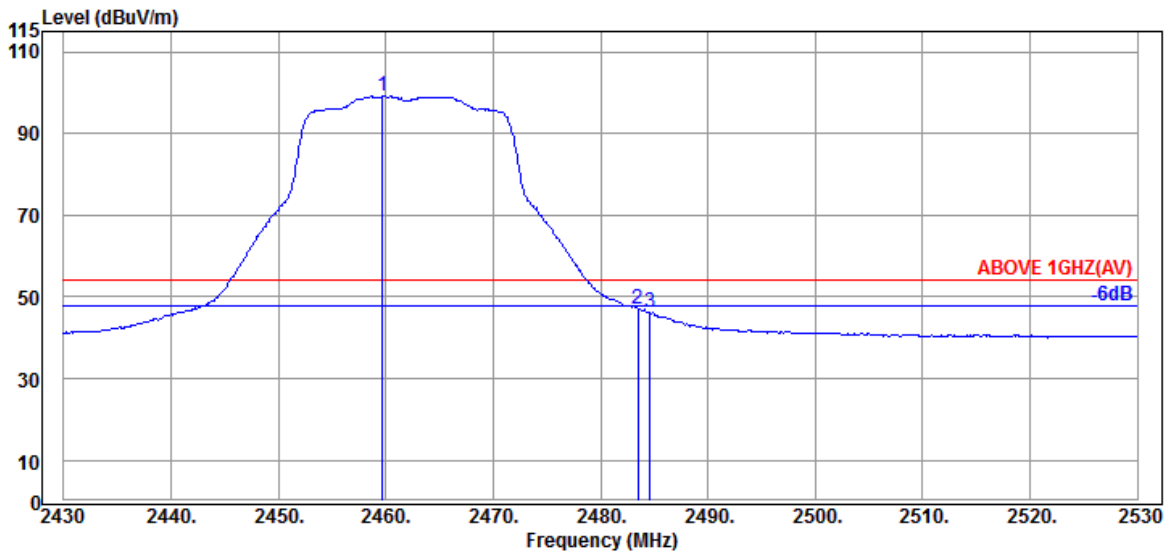


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	32.09	5.83	34.52	95.79	99.19	---	---	Average
2483.500	32.43	5.87	34.53	43.44	47.21	54.00	6.79	Average
2484.600	32.43	5.87	34.53	42.47	46.24	54.00	7.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

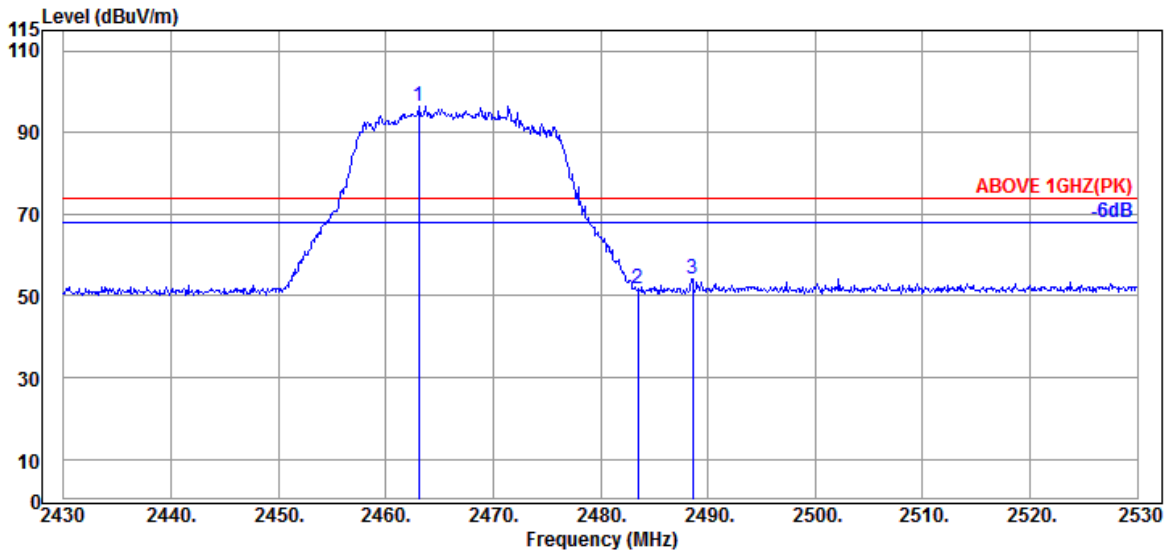

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.100	32.17	5.84	34.52	93.04	96.53	---	---	Peak
2483.500	32.43	5.87	34.53	47.95	51.72	74.00	22.28	Peak
2488.600	32.43	5.87	34.53	50.35	54.12	74.00	19.88	Peak

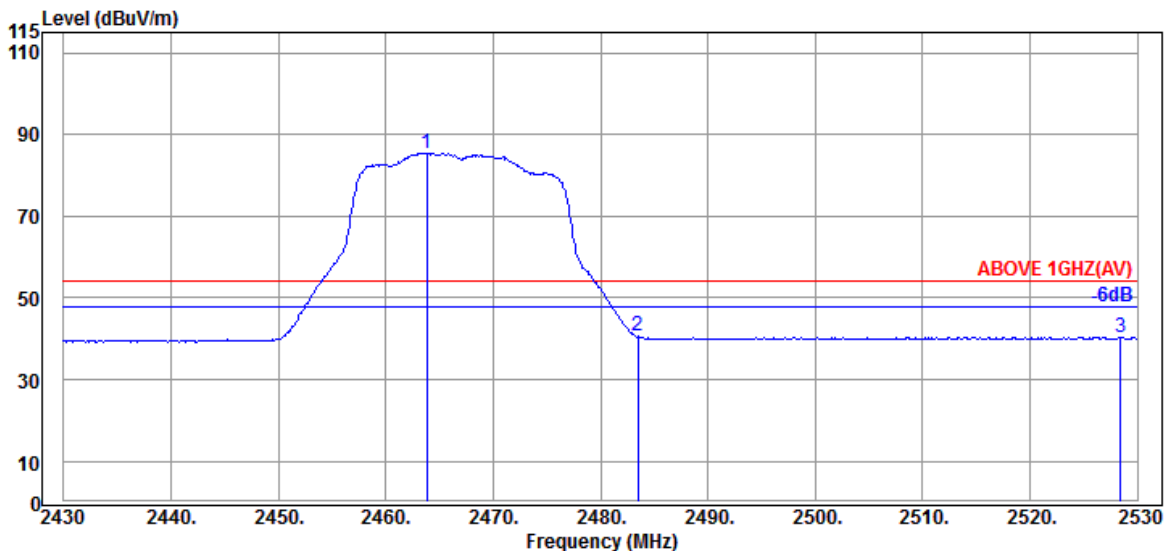


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	32.17	5.84	34.52	82.01	85.50	---	---	Average
2483.500	32.43	5.87	34.53	36.81	40.58	54.00	13.42	Average
2528.400	32.49	5.96	34.54	36.48	40.39	54.00	13.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

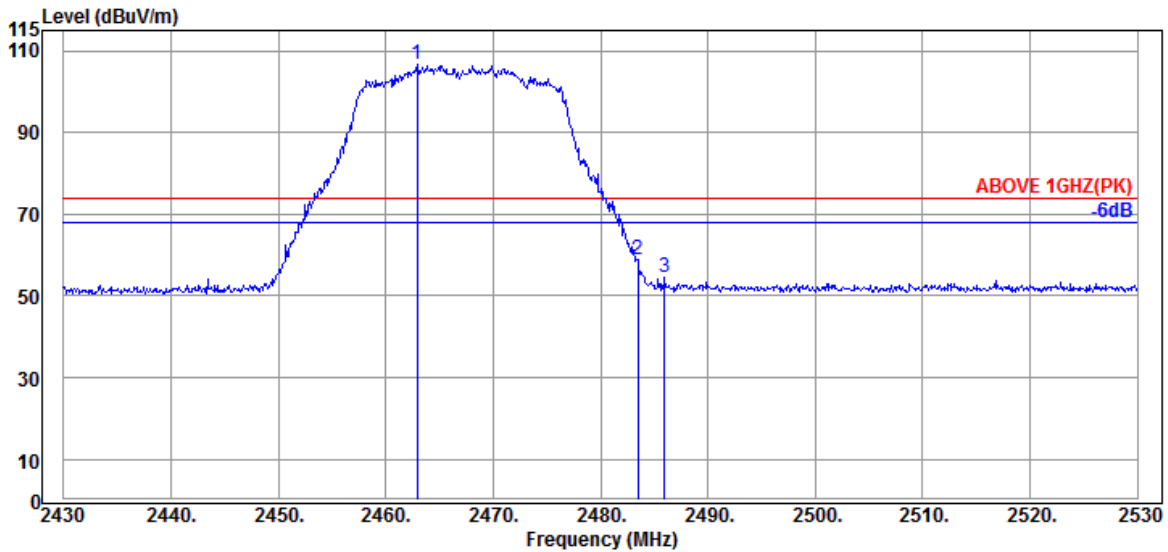

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.900	32.17	5.84	34.52	103.03	106.52	---	---	Peak
2483.500	32.43	5.87	34.53	55.18	58.95	74.00	15.05	Peak
2486.000	32.43	5.87	34.53	50.62	54.39	74.00	19.61	Peak

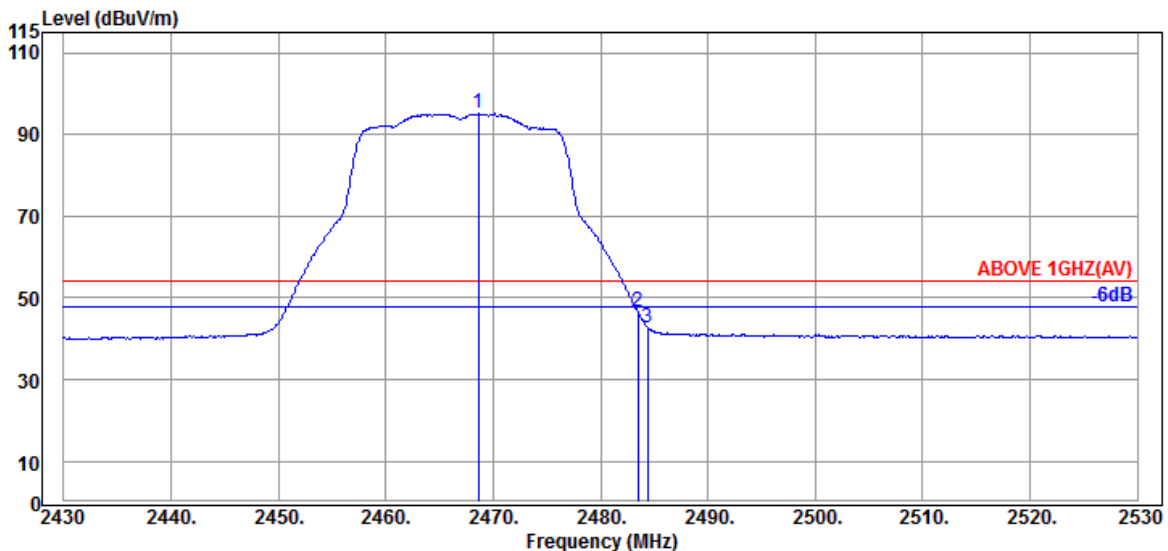


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.600	32.26	5.85	34.52	91.48	95.07	---	---	Average
2483.500	32.43	5.87	34.53	42.78	46.55	54.00	7.45	Average
2484.400	32.43	5.87	34.53	39.08	42.85	54.00	11.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

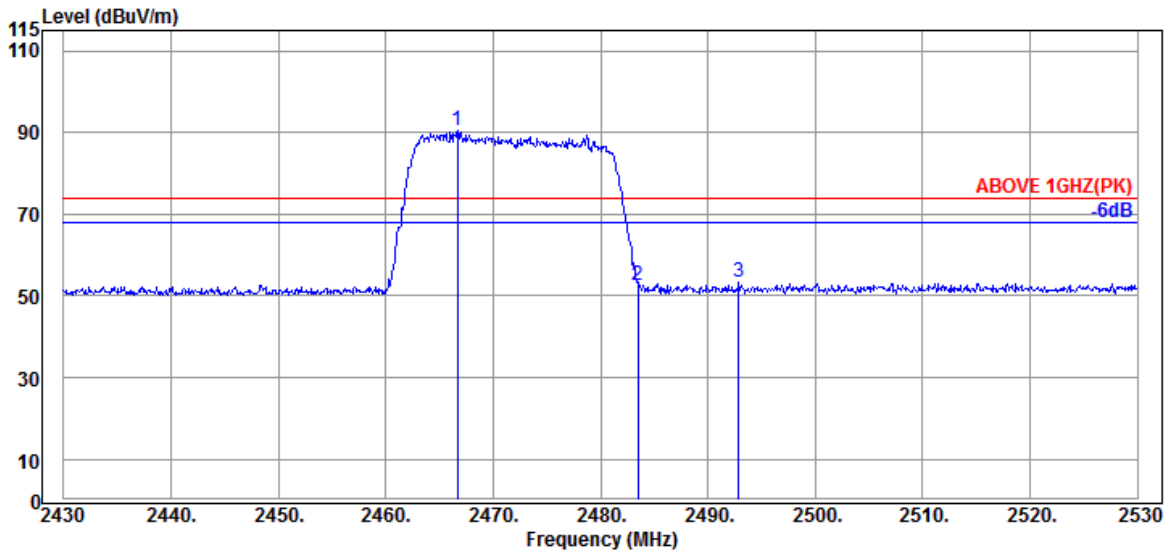

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.700	32.17	5.84	34.52	87.15	90.64	---	---	Peak
2483.500	32.43	5.87	34.53	48.67	52.44	74.00	21.56	Peak
2492.900	32.51	5.88	34.53	49.39	53.25	74.00	20.75	Peak

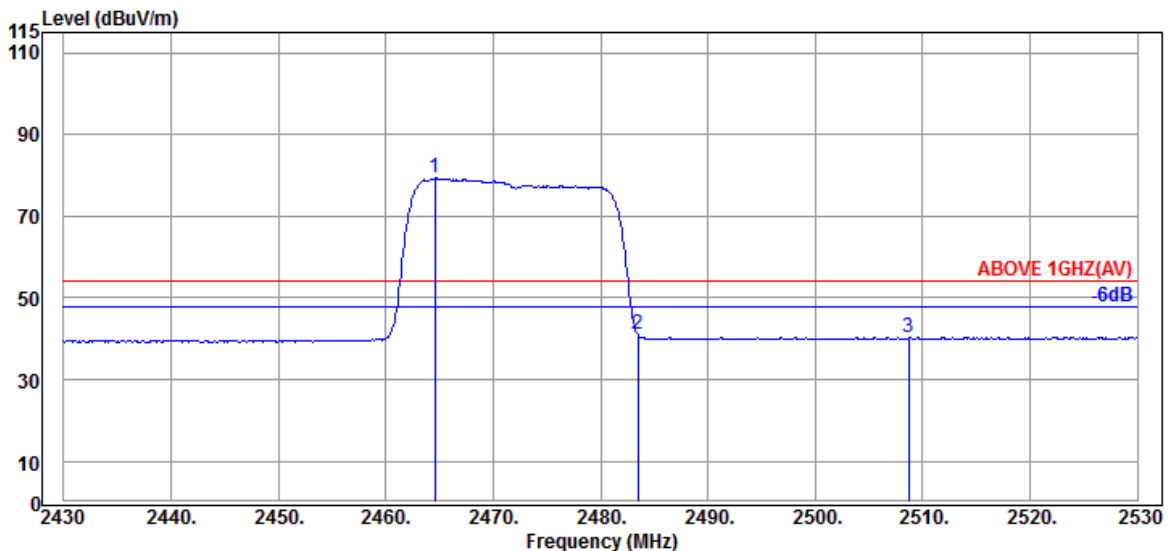


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.600	32.17	5.84	34.52	75.83	79.32	---	---	Average
2483.500	32.43	5.87	34.53	37.33	41.10	54.00	12.90	Average
2508.700	32.57	5.91	34.53	36.33	40.28	54.00	13.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

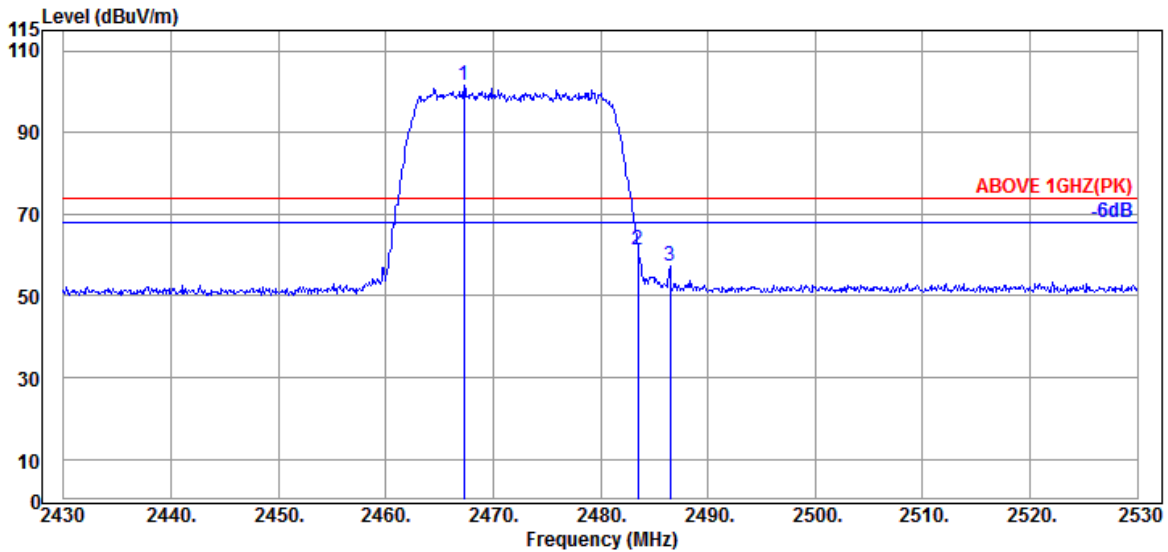

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.300	32.17	5.84	34.52	98.10	100.00	---	---	Peak
2483.500	32.43	5.87	34.53	57.59	64.55	74.00	9.45	Peak
2486.500	32.43	5.87	34.53	53.52	56.86	74.00	17.14	Peak

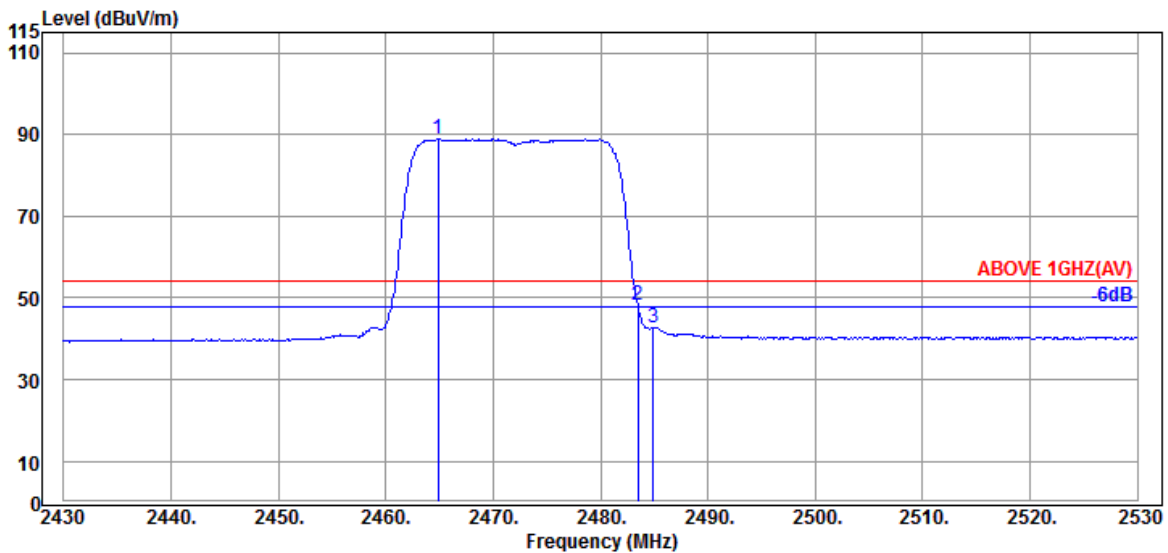


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	32.17	5.84	34.52	85.52	89.01	---	---	Average
2483.500	32.43	5.87	34.53	44.53	48.30	54.00	5.70	Average
2484.900	32.43	5.87	34.53	39.11	42.88	54.00	11.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

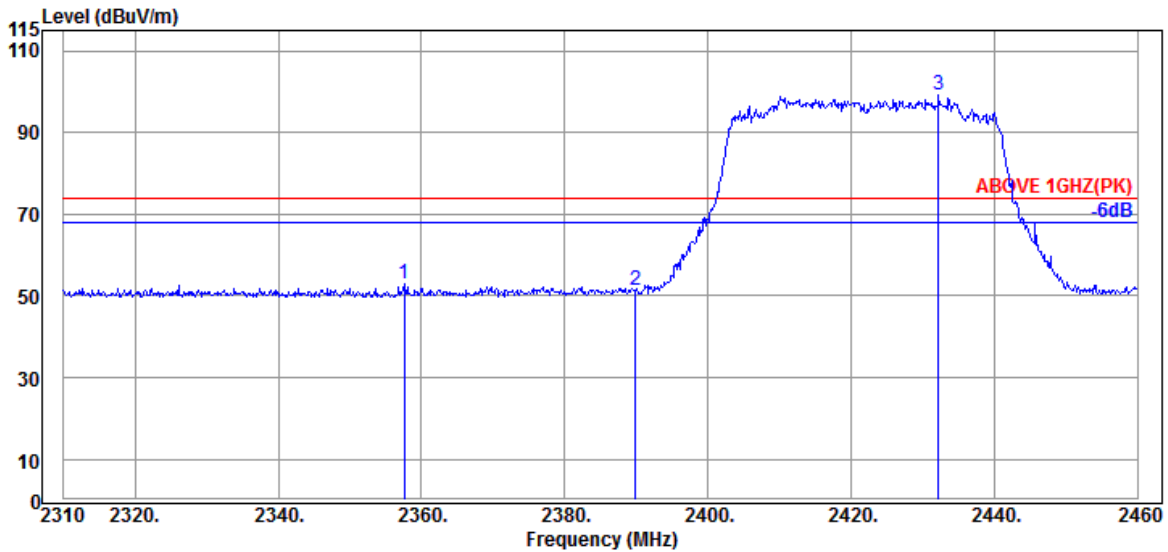

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2357.550	32.00	5.67	34.50	49.65	52.82	74.00	21.18	Peak
2389.950	32.00	5.72	34.51	48.30	51.51	74.00	22.49	Peak
@ 2432.250	32.00	5.79	34.52	95.91	99.18	---	---	Peak

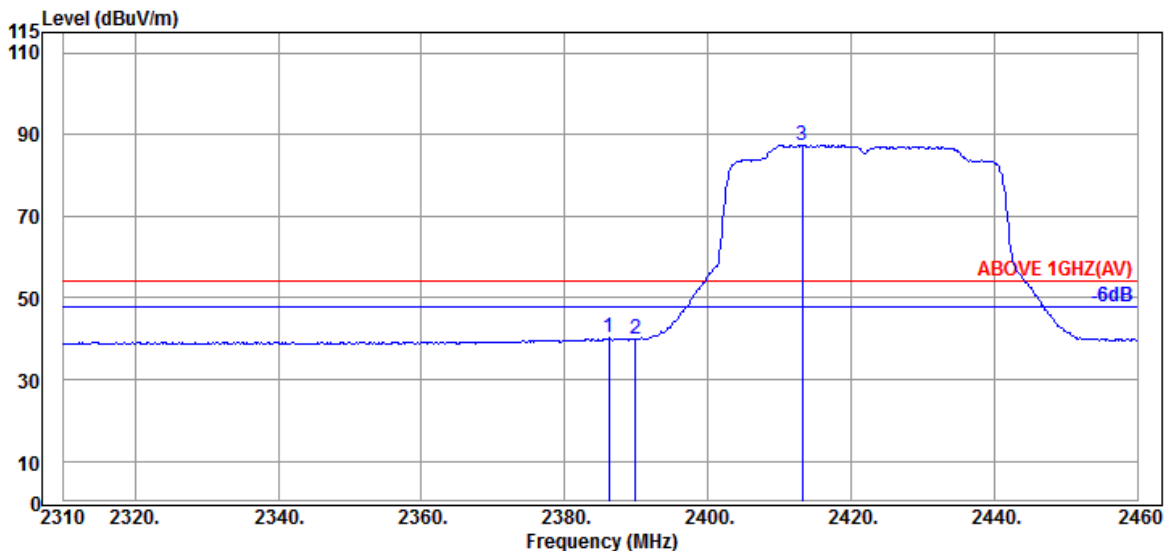


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	32.00	5.72	34.51	36.93	40.14	54.00	13.86	Average
2389.950	32.00	5.72	34.51	36.80	40.01	54.00	13.99	Average
@ 2413.200	32.00	5.76	34.51	84.17	87.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

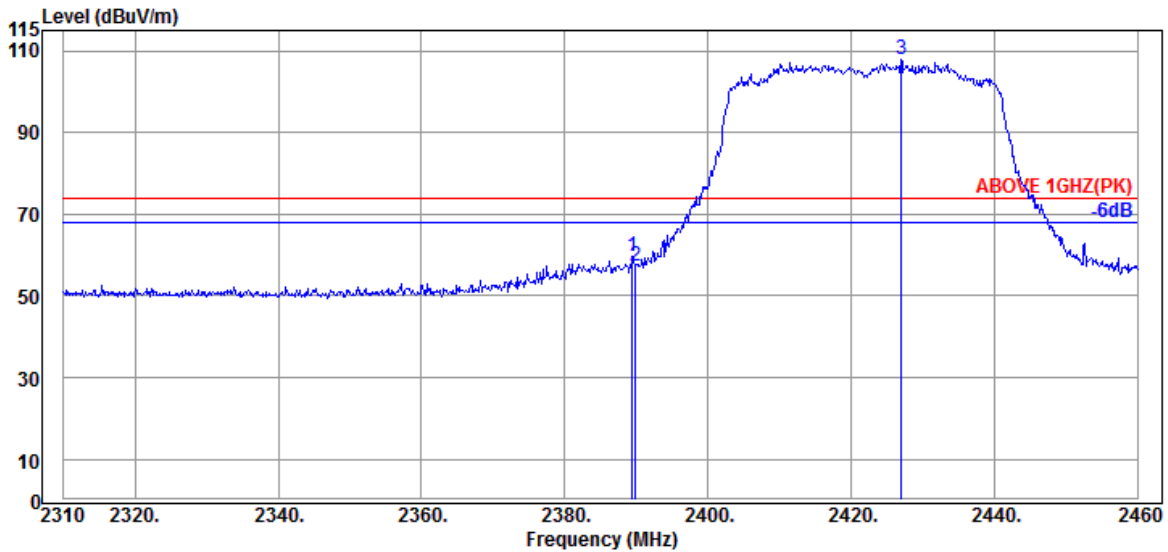

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	56.37	59.58	74.00	14.42	Peak
2389.950	32.00	5.72	34.51	54.03	57.24	74.00	16.76	Peak
@ 2427.000	32.00	5.78	34.52	104.53	107.79	---	---	Peak

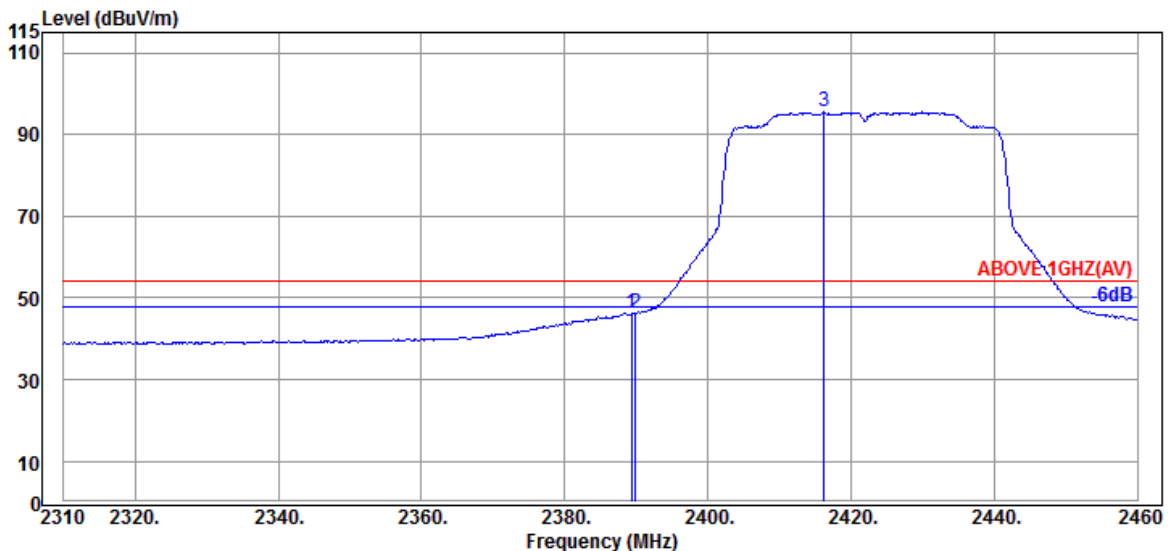


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	32.00	5.72	34.51	42.96	46.17	54.00	7.83	Average
2389.950	32.00	5.72	34.51	43.00	46.21	54.00	7.79	Average
@ 2416.200	32.00	5.76	34.51	92.30	95.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

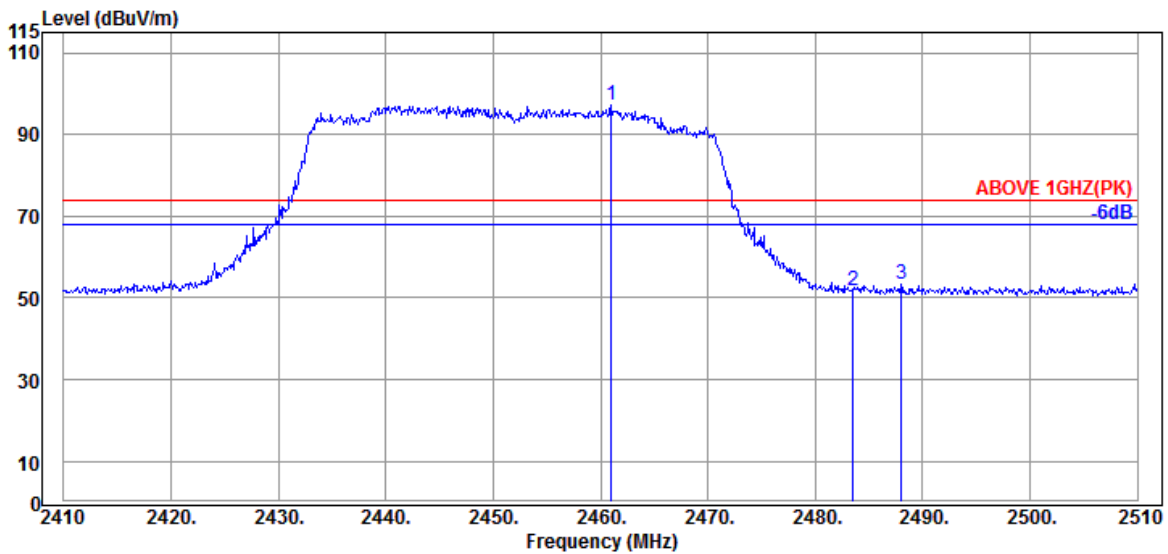

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	32.17	5.84	34.52	93.53	97.02	---	---	Peak
2483.500	32.43	5.87	34.53	47.99	51.76	74.00	22.24	Peak
2488.000	32.43	5.87	34.53	49.60	53.37	74.00	20.63	Peak

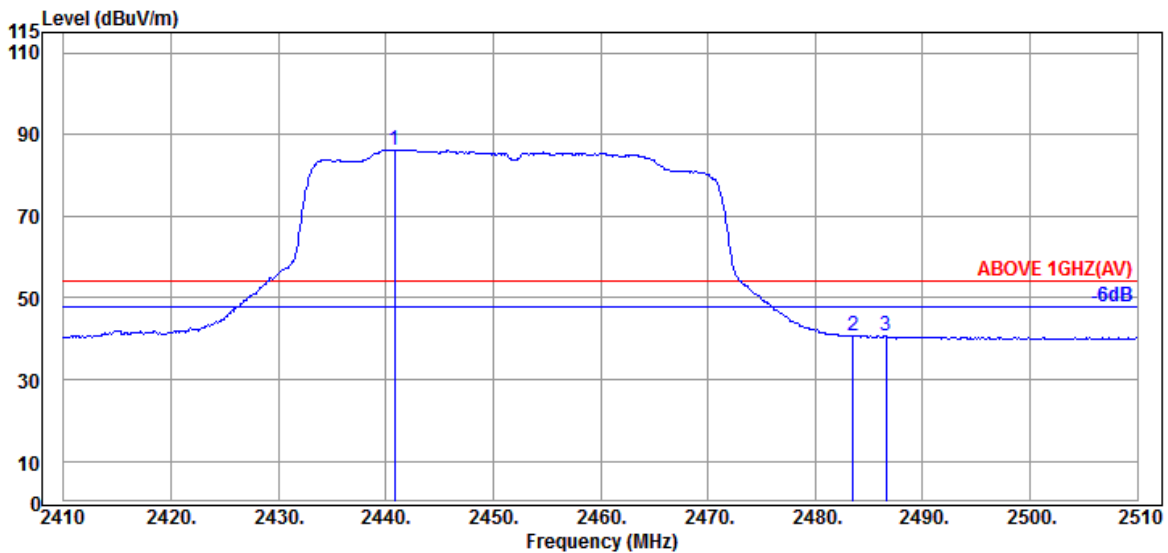


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.800	32.00	5.80	34.52	83.02	86.30	---	---	Average
2483.500	32.43	5.87	34.53	36.88	40.65	54.00	13.35	Average
2486.600	32.43	5.87	34.53	36.95	40.72	54.00	13.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

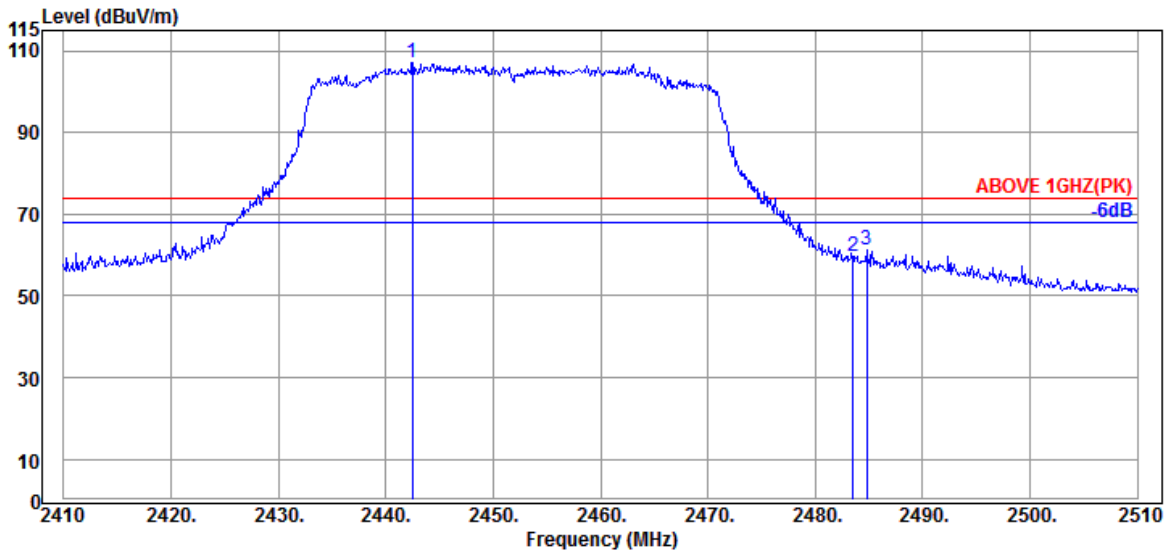

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.500	32.00	5.80	34.52	103.72	107.00	---	---	Peak
2483.500	32.43	5.87	34.53	55.77	59.54	74.00	14.46	Peak
2484.800	32.43	5.87	34.53	57.62	61.39	74.00	12.61	Peak

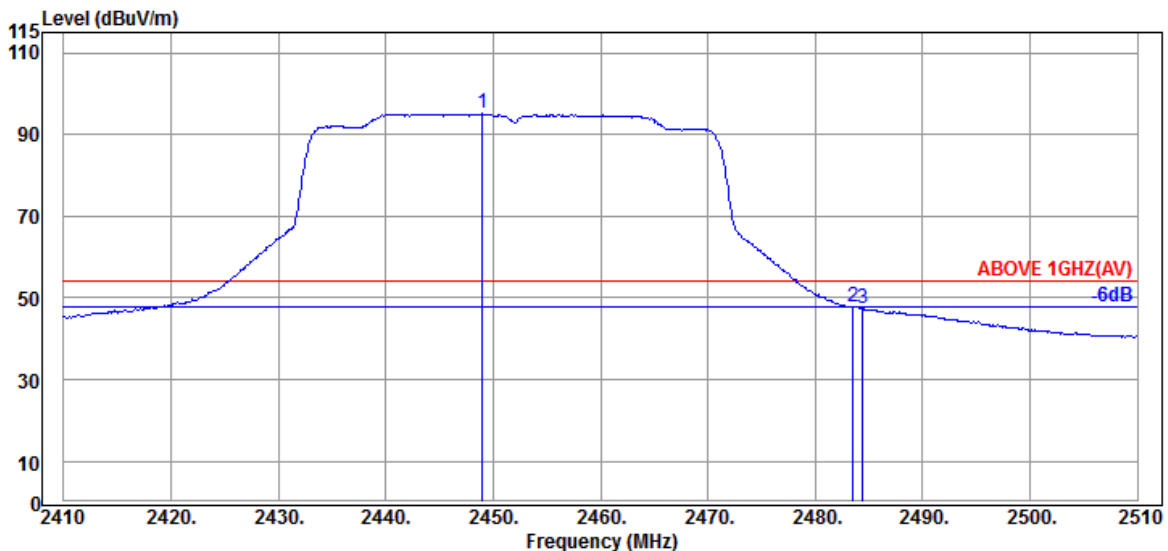


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.000	32.00	5.81	34.52	91.83	95.12	---	---	Average
2483.500	32.43	5.87	34.53	44.02	47.79	54.00	6.21	Average
2484.400	32.43	5.87	34.53	43.57	47.34	54.00	6.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

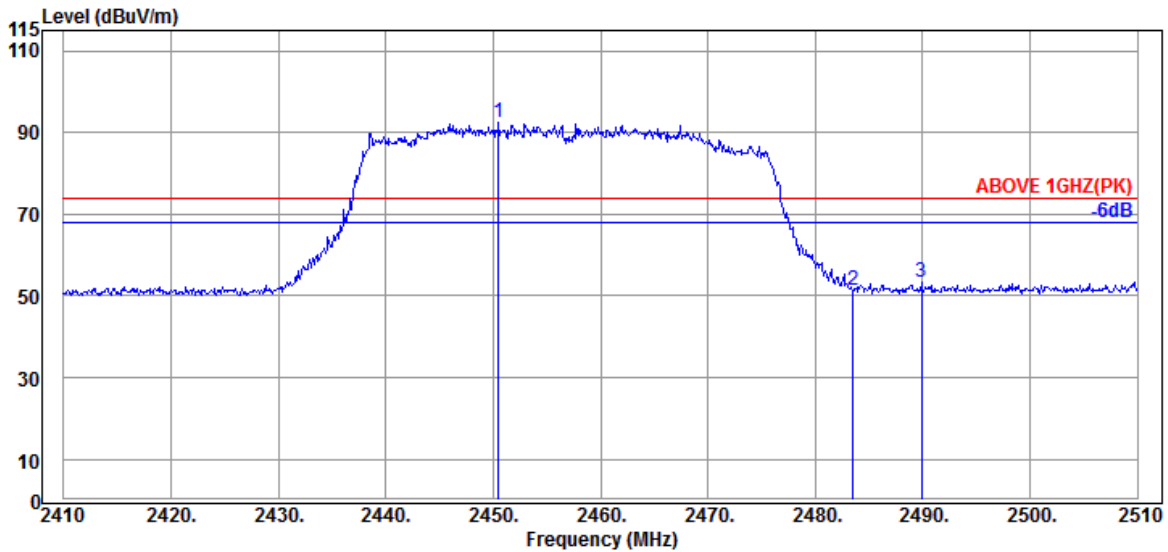

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.500	32.00	5.81	34.52	89.22	92.51	---	---	Peak
2483.500	32.43	5.87	34.53	47.63	51.40	74.00	22.60	Peak
2489.900	32.51	5.88	34.53	49.63	53.49	74.00	20.51	Peak

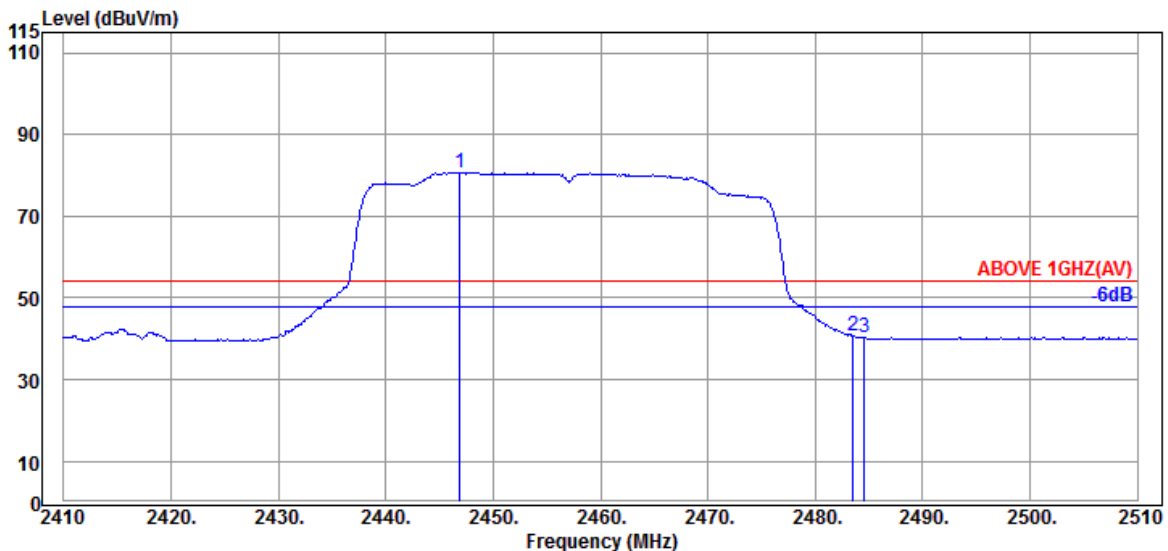


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.900	32.00	5.81	34.52	77.46	80.75	---	---	Average
2483.500	32.43	5.87	34.53	36.85	40.62	54.00	13.38	Average
2484.600	32.43	5.87	34.53	36.52	40.29	54.00	13.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

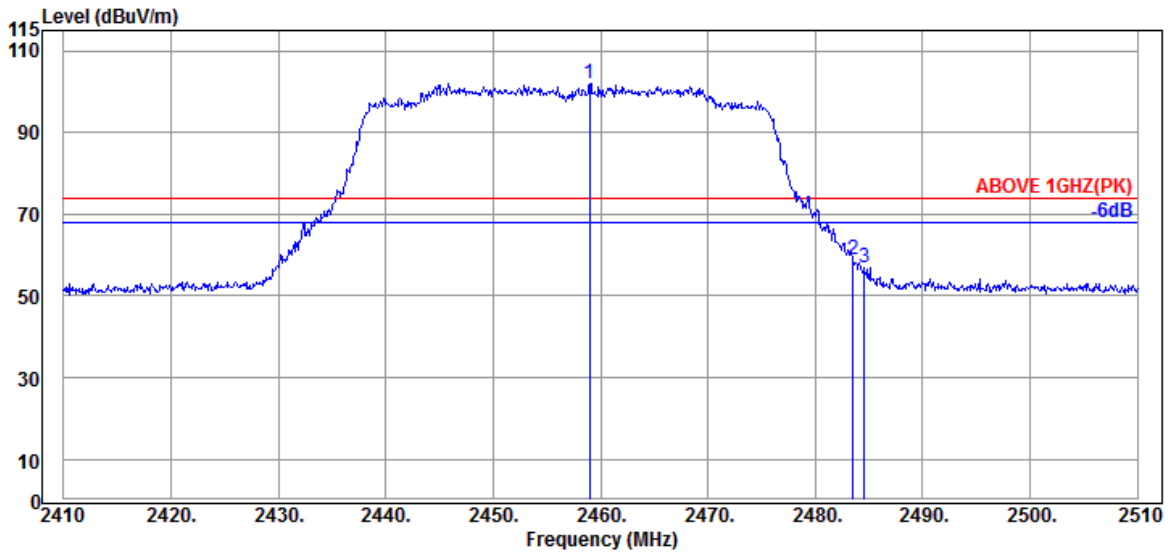

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.09	5.83	34.52	98.62	102.02	---	---	Peak
2483.500	32.43	5.87	34.53	54.94	58.71	74.00	15.29	Peak
2484.600	32.43	5.87	34.53	53.03	56.80	74.00	17.20	Peak

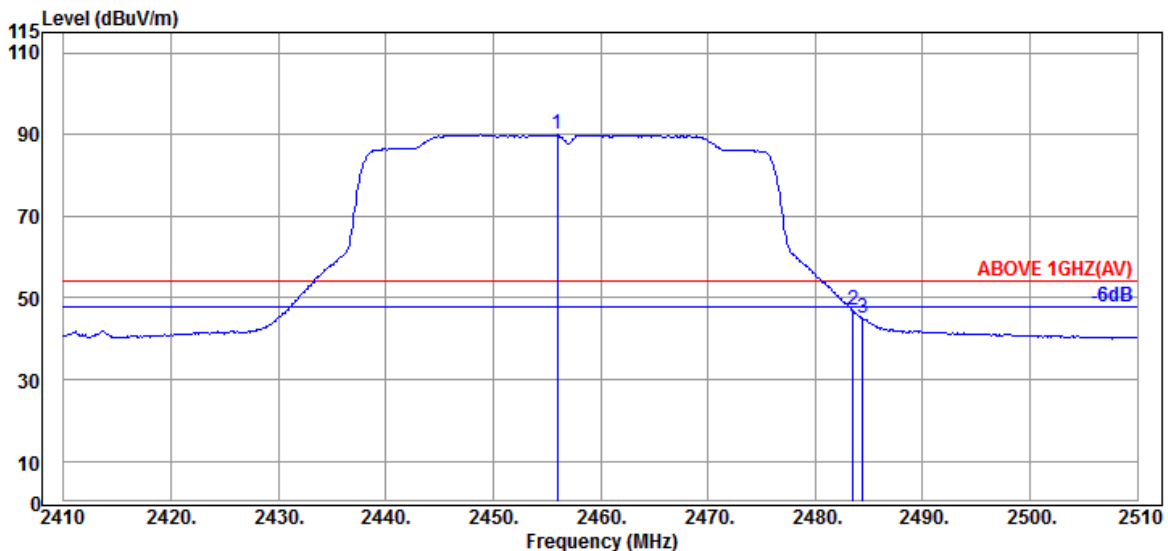


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.09	5.83	34.52	86.51	89.91	---	---	Average
2483.500	32.43	5.87	34.53	43.12	46.89	54.00	7.11	Average
2484.400	32.43	5.87	34.53	41.15	44.92	54.00	9.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

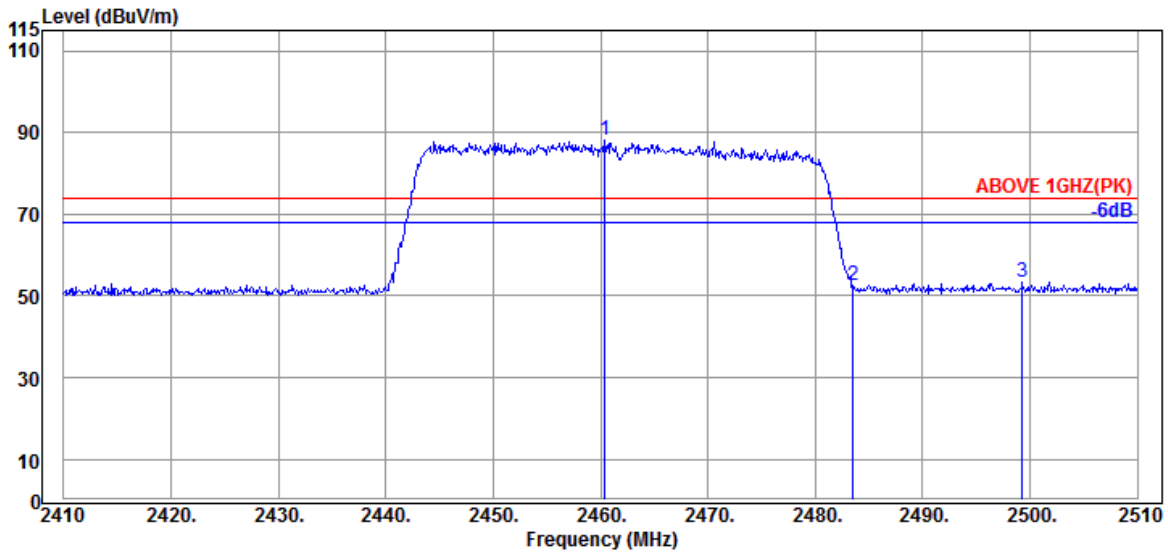

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	32.09	5.83	34.52	84.79	88.19	---	---	Peak
2483.500	32.43	5.87	34.53	48.63	52.40	74.00	21.60	Peak
2499.300	32.60	5.89	34.53	49.42	53.38	74.00	20.62	Peak

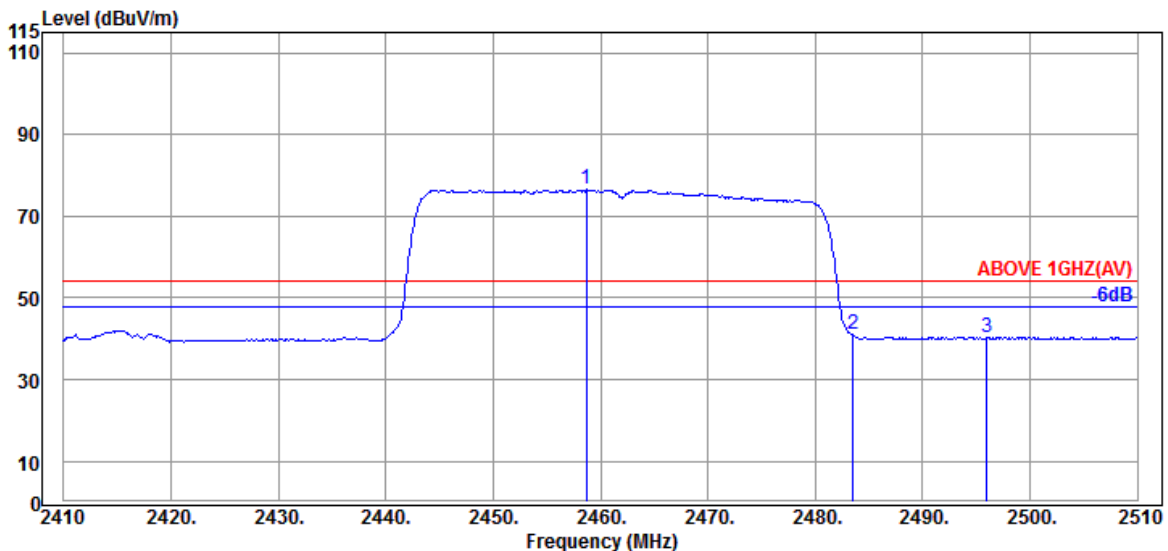


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	32.09	5.83	34.52	73.09	76.49	---	---	Average
2483.500	32.43	5.87	34.53	37.18	40.95	54.00	13.05	Average
2496.000	32.51	5.88	34.53	36.51	40.37	54.00	13.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

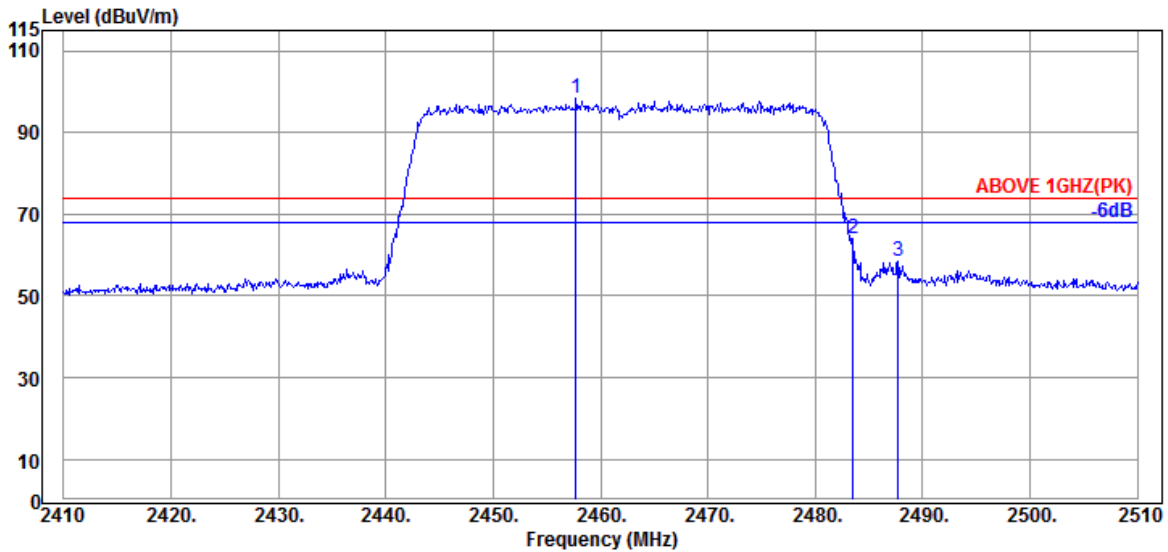

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.700	32.09	5.83	34.52	94.83	98.23	---	---	Peak
2483.500	32.43	5.87	34.53	60.06	63.83	74.00	10.17	Peak
2487.700	32.43	5.87	34.53	54.70	58.47	74.00	15.53	Peak

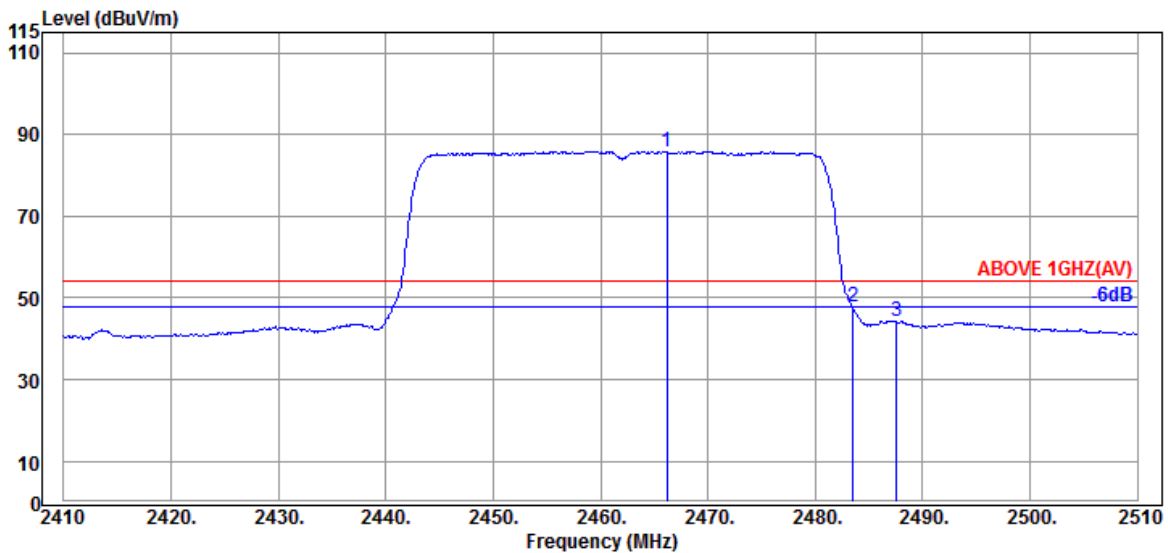


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.17	5.84	34.52	82.36	85.85	---	---	Average
2483.500	32.43	5.87	34.53	44.01	47.78	54.00	6.22	Average
2487.600	32.43	5.87	34.53	40.58	44.35	54.00	9.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

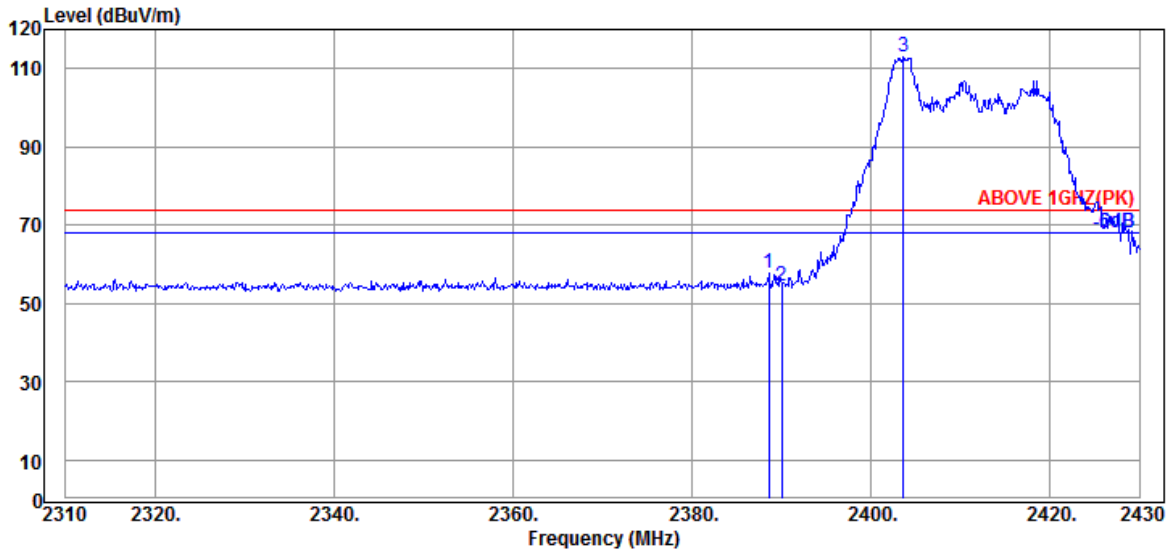

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	32.00	5.72	34.51	54.57	57.78	74.00	16.22	Peak
2390.040	32.00	5.72	34.51	51.37	54.58	74.00	19.42	Peak
@ 2403.600	32.00	5.74	34.51	109.91	113.14	---	---	Peak

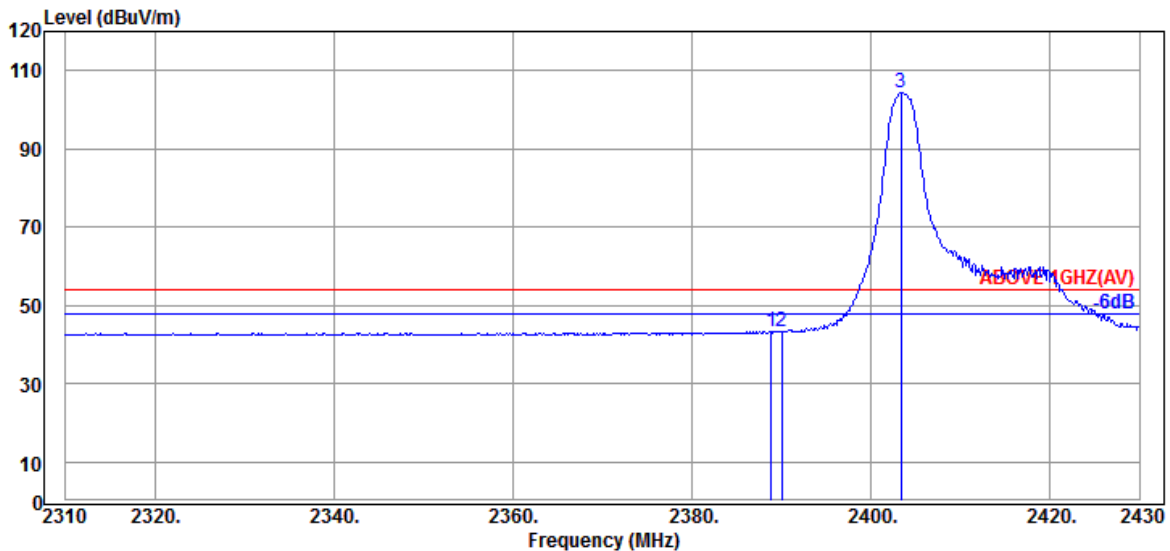


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	32.00	5.72	34.51	40.08	43.29	54.00	10.71	Average
2390.040	32.00	5.72	34.51	39.93	43.14	54.00	10.86	Average
@ 2403.360	32.00	5.74	34.51	101.11	104.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

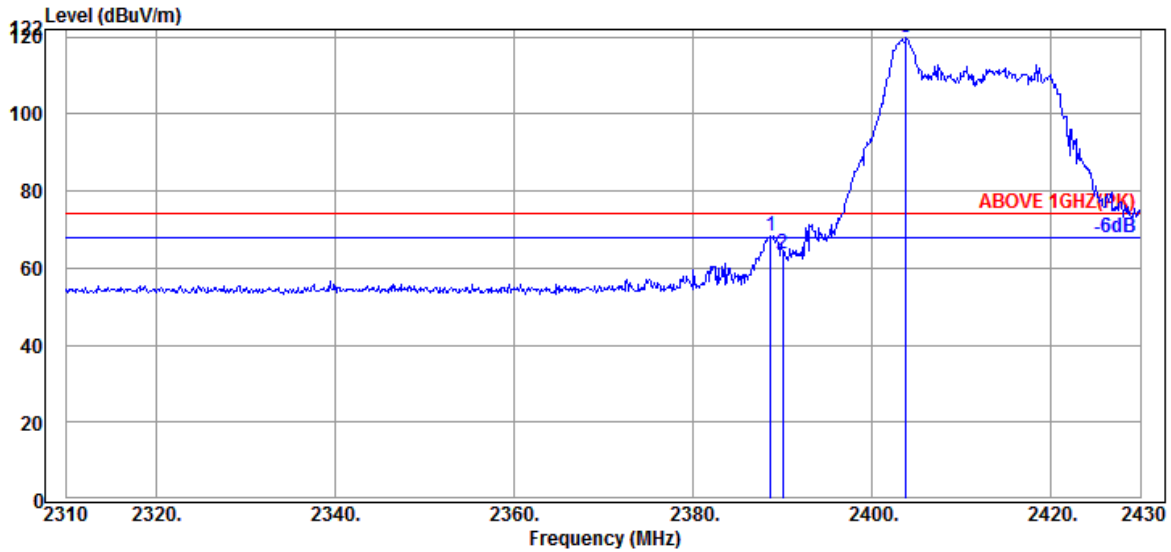

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	32.00	5.72	34.51	65.24	68.45	74.00	5.55	Peak
2390.040	32.00	5.72	34.51	60.63	63.84	74.00	10.16	Peak
@ 2403.840	32.00	5.74	34.51	116.49	119.72	---	---	Peak

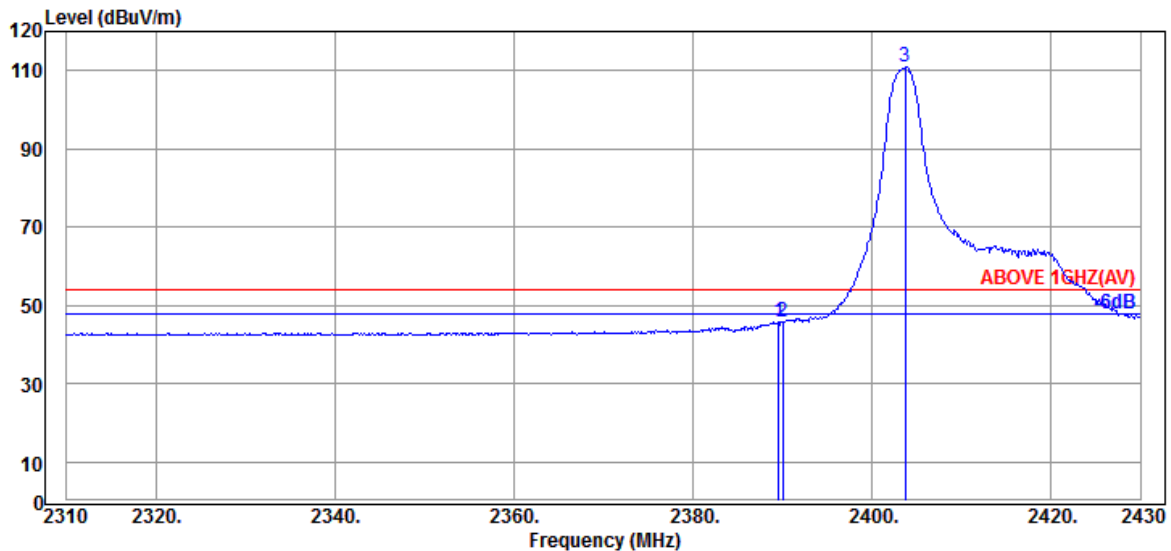


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	32.00	5.72	34.51	42.52	45.73	54.00	8.27	Average
2390.040	32.00	5.72	34.51	42.55	45.76	54.00	8.24	Average
@ 2403.720	32.00	5.74	34.51	107.67	110.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

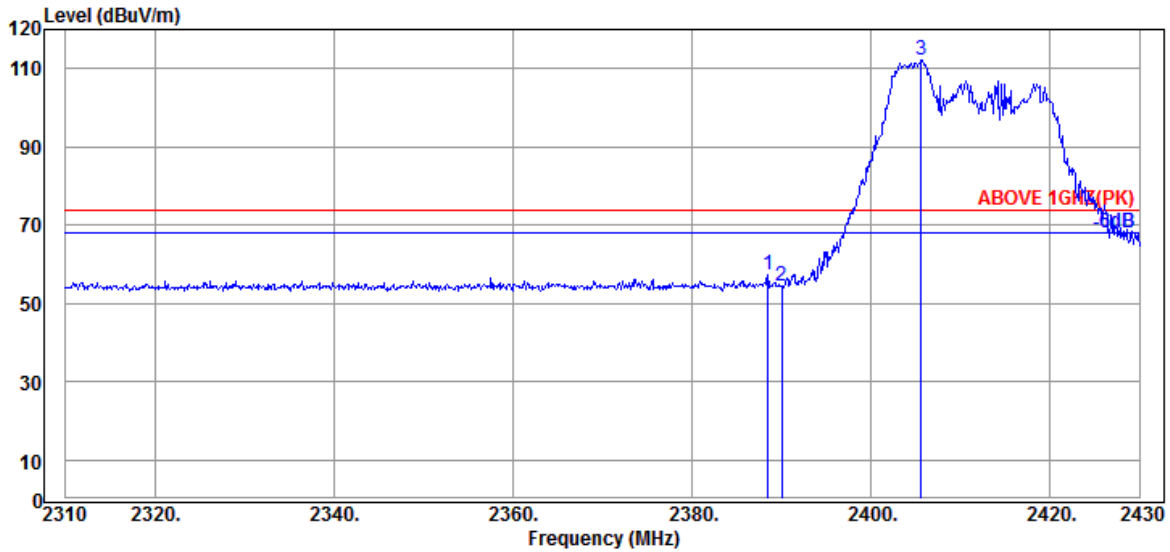

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.480	32.00	5.72	34.51	54.03	57.24	74.00	16.76	Peak
2390.040	32.00	5.72	34.51	51.21	54.42	74.00	19.58	Peak
@ 2405.640	32.00	5.75	34.51	108.92	112.16	---	---	Peak

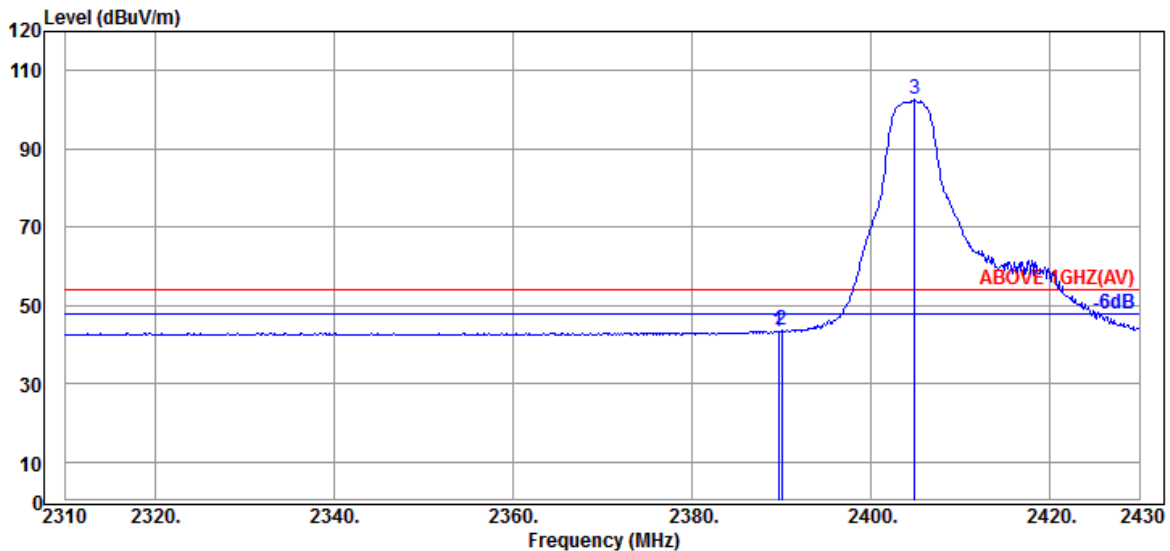


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	32.00	5.72	34.51	40.18	43.39	54.00	10.61	Average
2390.040	32.00	5.72	34.51	40.33	43.54	54.00	10.46	Average
@ 2404.920	32.00	5.75	34.51	99.27	102.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

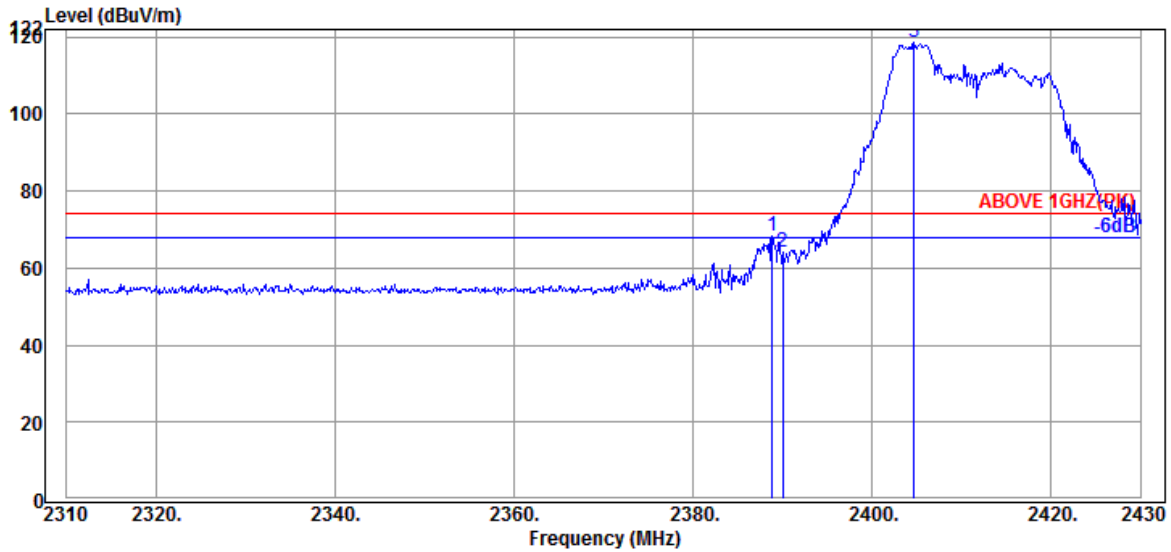

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	32.00	5.72	34.51	65.06	68.27	74.00	5.73	Peak
2390.040	32.00	5.72	34.51	60.94	64.15	74.00	9.85	Peak
@ 2404.680	32.00	5.75	34.51	115.49	118.73	---	---	Peak

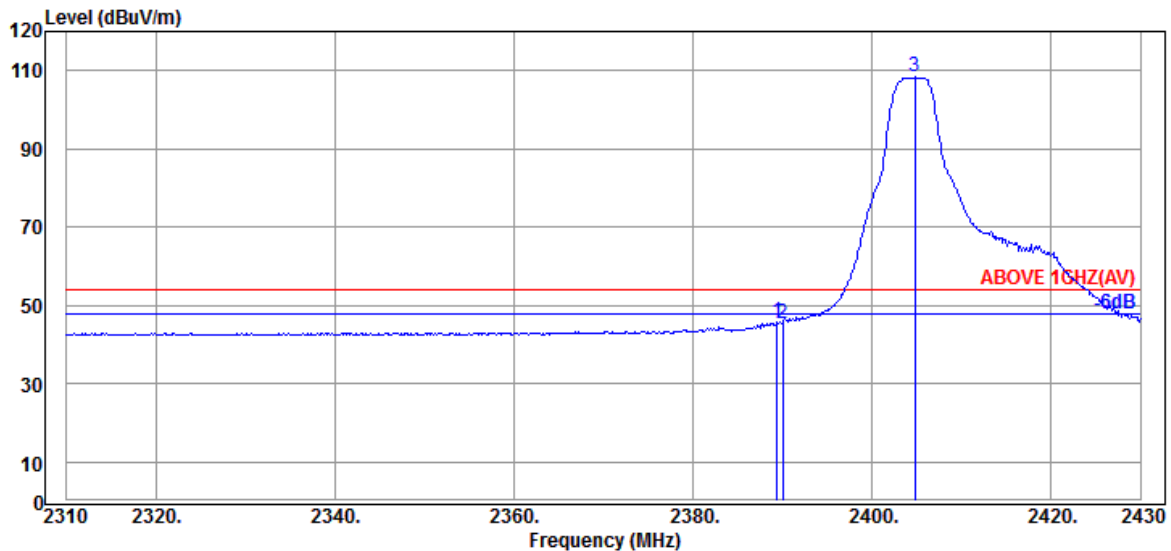


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	32.00	5.72	34.51	42.44	45.65	54.00	8.35	Average
2390.040	32.00	5.72	34.51	42.22	45.43	54.00	8.57	Average
@ 2404.800	32.00	5.75	34.51	105.18	108.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

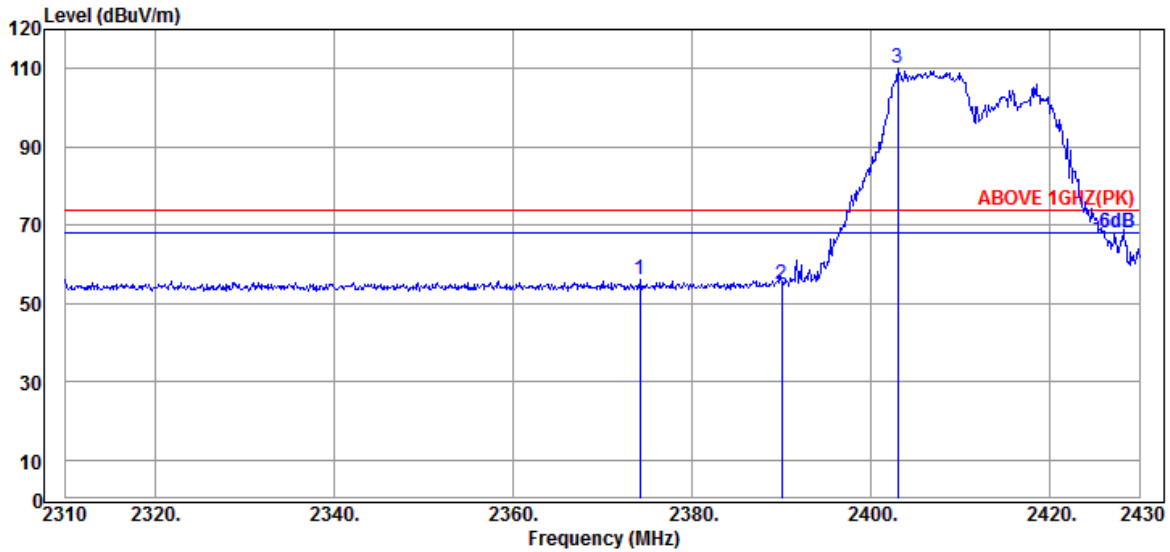

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.200	32.00	5.70	34.50	52.94	56.14	74.00	17.86	Peak
2390.040	32.00	5.72	34.51	51.52	54.73	74.00	19.27	Peak
@ 2403.000	32.00	5.74	34.51	106.94	110.17	---	---	Peak

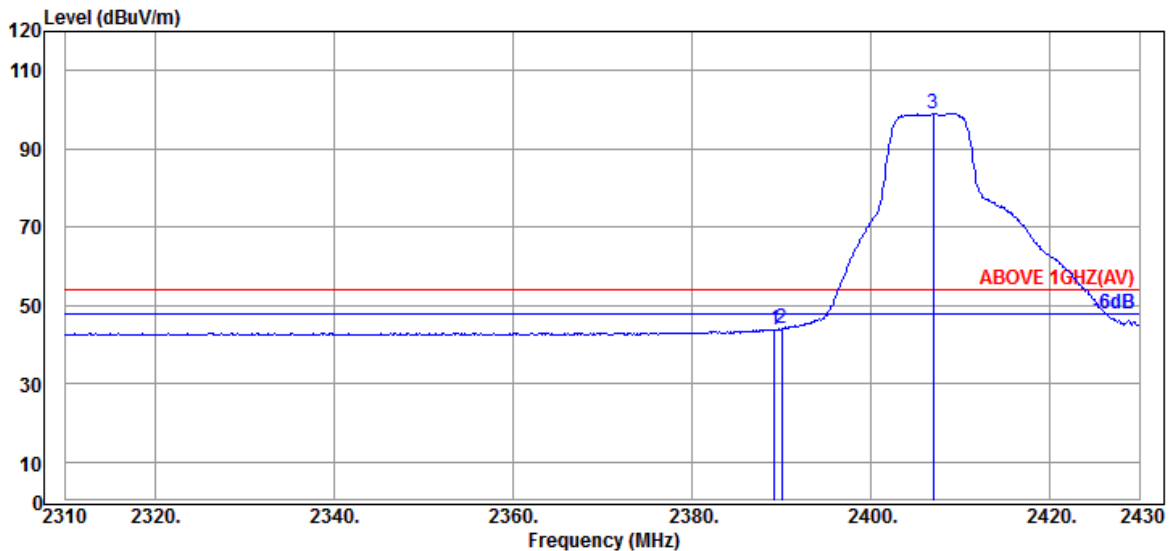


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	40.70	43.91	54.00	10.09	Average
2390.040	32.00	5.72	34.51	40.76	43.97	54.00	10.03	Average
@ 2406.960	32.00	5.75	34.51	95.86	99.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

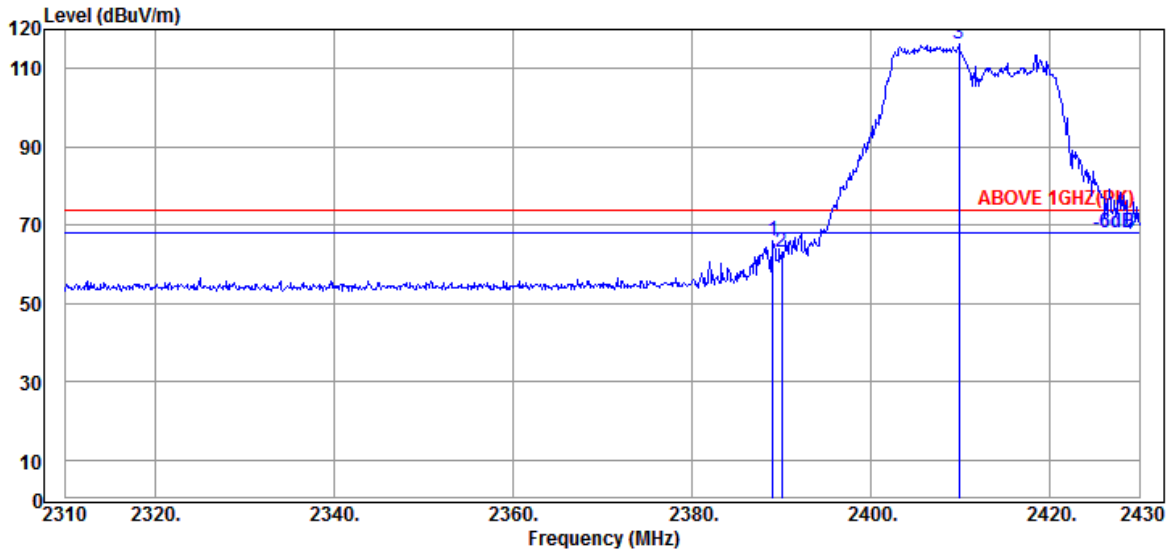

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	32.00	5.72	34.51	62.96	66.17	74.00	7.83	Peak
2390.040	32.00	5.72	34.51	60.04	63.25	74.00	10.75	Peak
@ 2409.840	32.00	5.75	34.51	112.91	116.15	---	---	Peak

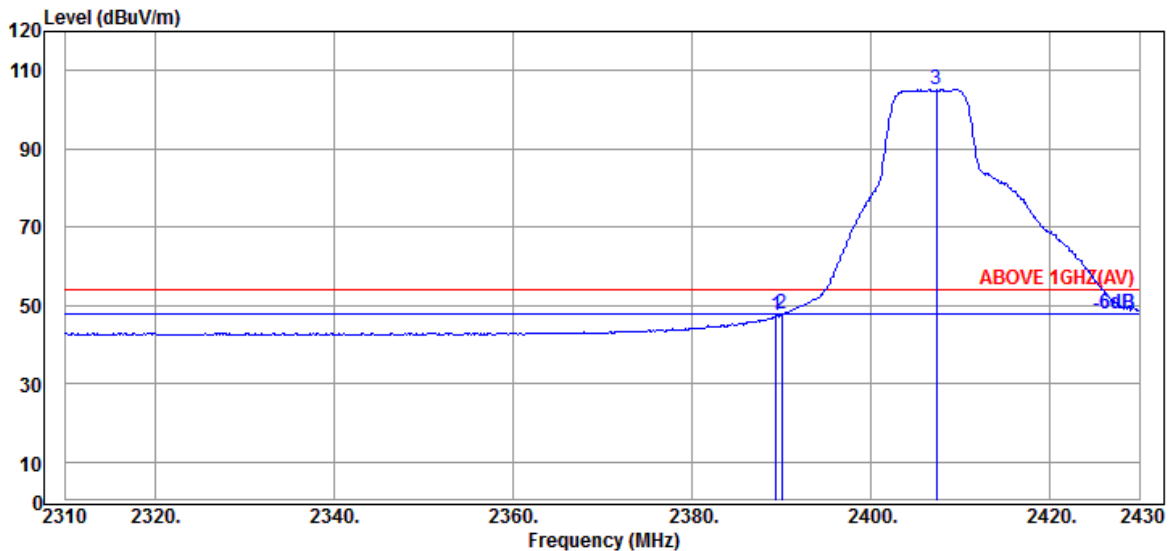


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	32.00	5.72	34.51	44.11	47.32	54.00	6.68	Average
2390.040	32.00	5.72	34.51	44.43	47.64	54.00	6.36	Average
@ 2407.320	32.00	5.75	34.51	101.93	105.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

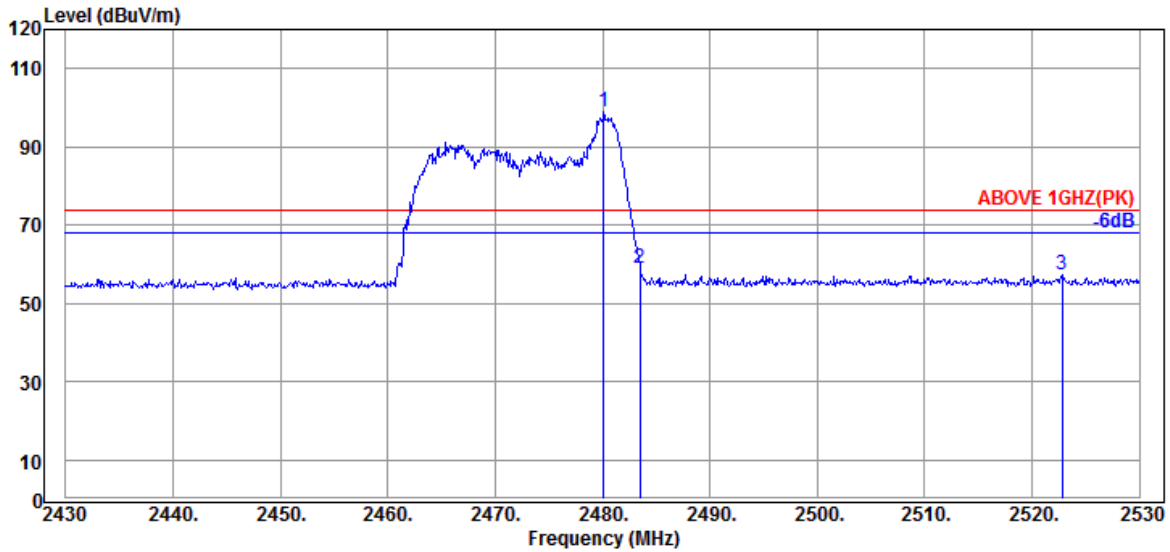

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.100	32.34	5.86	34.53	95.35	99.02	---	---	Peak
	2483.500	32.43	5.87	34.53	55.22	58.99	74.00	15.01	Peak
	2522.800	32.51	5.94	34.53	53.42	57.34	74.00	16.66	Peak

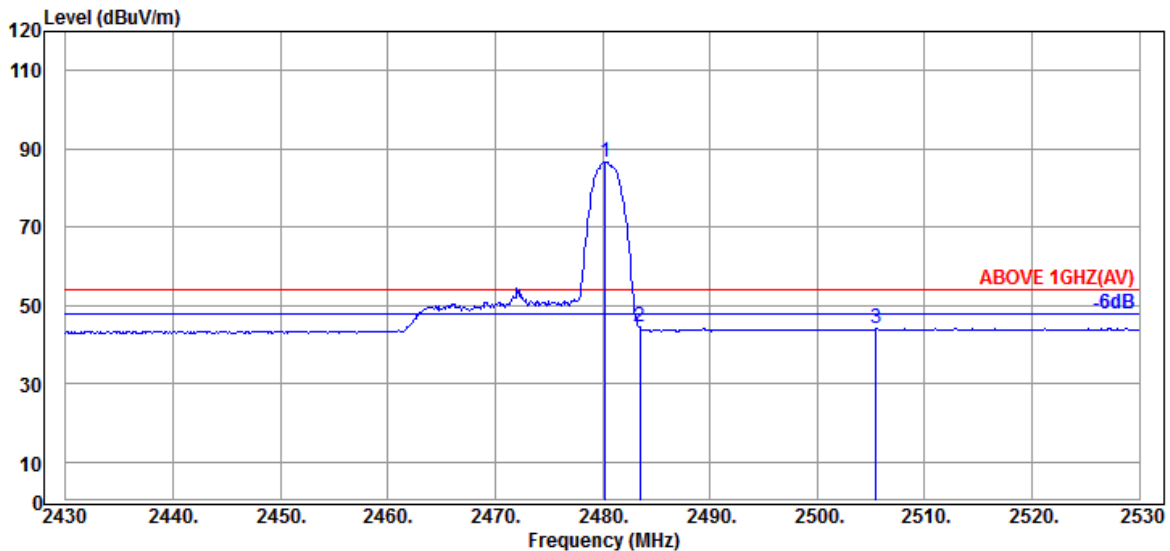


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	32.34	5.86	34.53	83.11	86.78	---	---	Average
	2483.500	32.43	5.87	34.53	40.59	44.36	54.00	9.64	Average
	2505.500	32.57	5.91	34.53	40.15	44.10	54.00	9.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

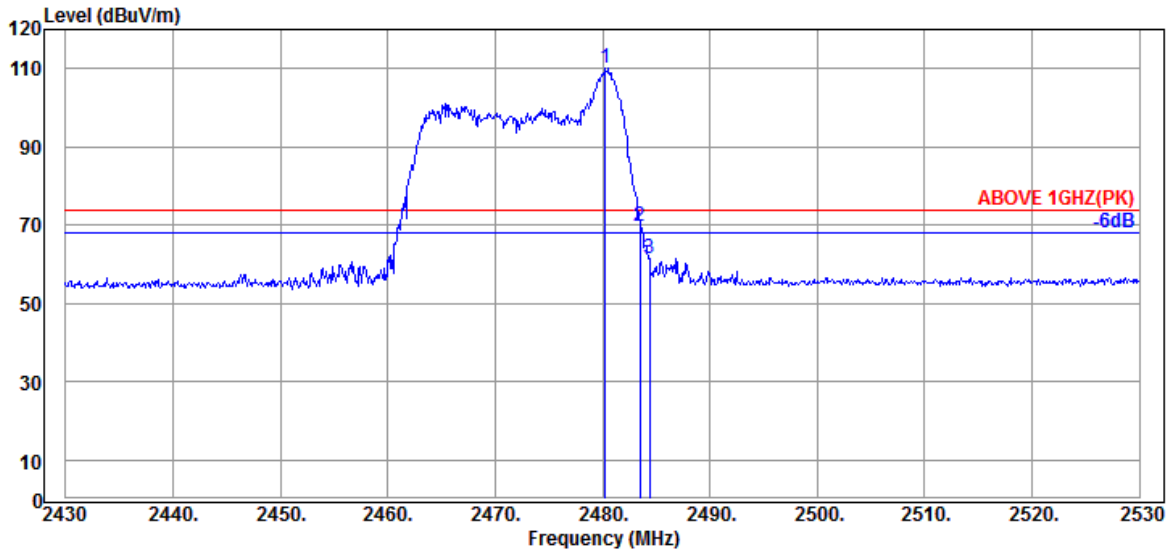

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	32.34	5.86	34.53	106.30	109.97	---	---	Peak
2483.500	32.43	5.87	34.53	65.88	69.65	74.00	4.35	Peak
2484.400	32.43	5.87	34.53	57.72	61.49	74.00	12.51	Peak

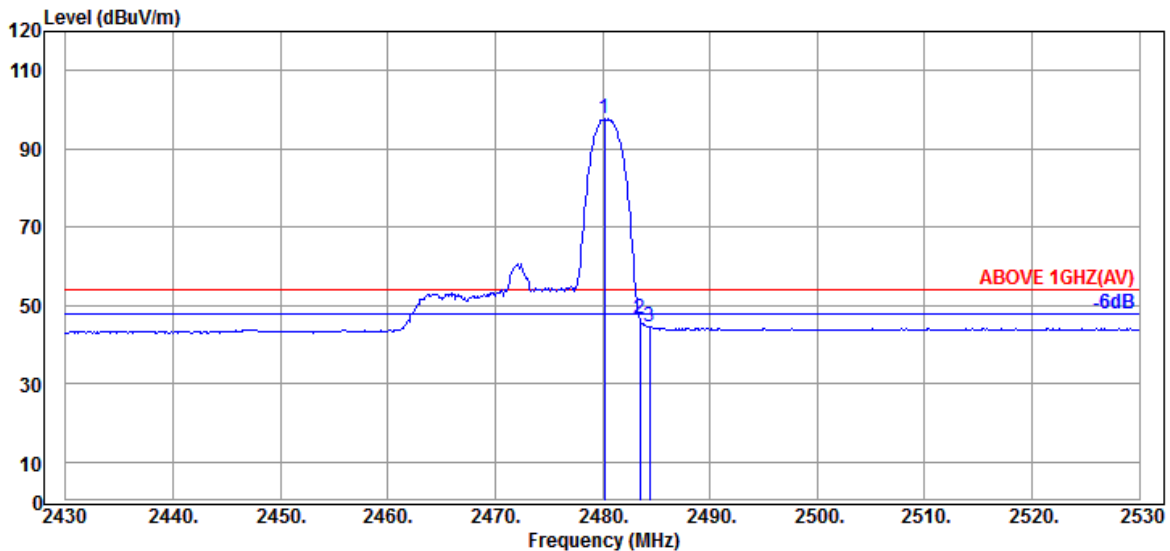


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	32.34	5.86	34.53	94.04	97.71	---	---	Average
2483.500	32.43	5.87	34.53	42.92	46.69	54.00	7.31	Average
2484.400	32.43	5.87	34.53	40.69	44.46	54.00	9.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

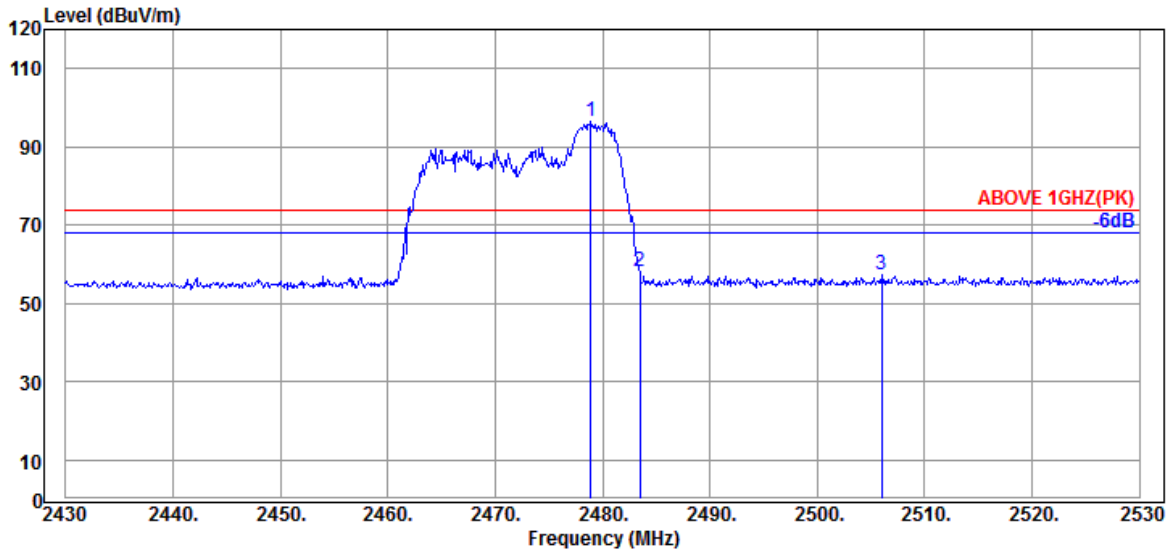

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	32.34	5.86	34.53	92.72	96.39	---	---	Peak
2483.500	32.43	5.87	34.53	54.54	58.31	74.00	15.69	Peak
2506.000	32.57	5.91	34.53	53.32	57.27	74.00	16.73	Peak

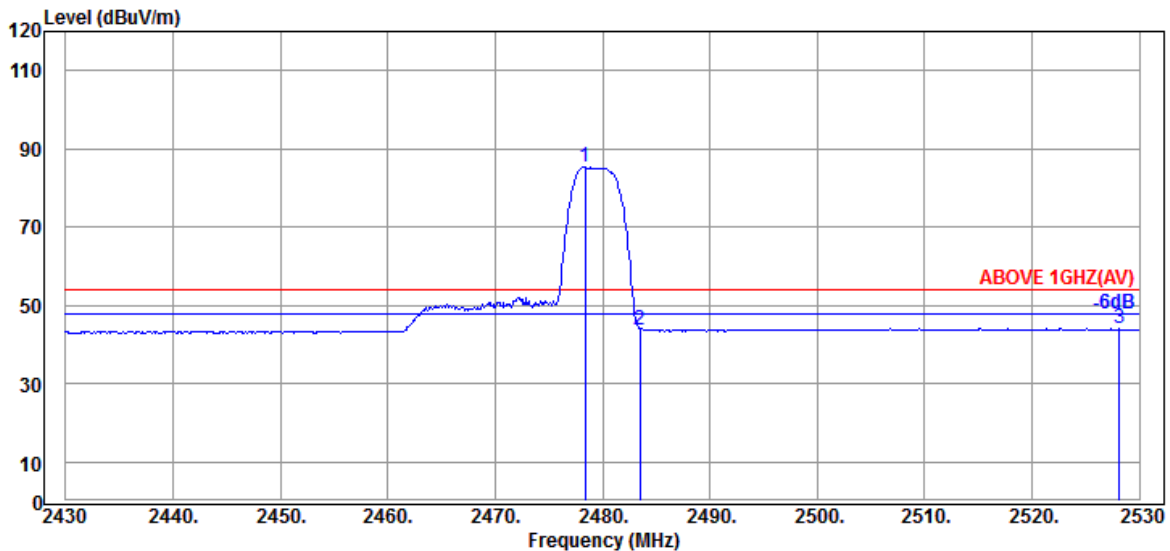


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	32.34	5.86	34.53	81.71	85.38	---	---	Average
2483.500	32.43	5.87	34.53	40.09	43.86	54.00	10.14	Average
2528.100	32.49	5.96	34.54	40.16	44.07	54.00	9.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

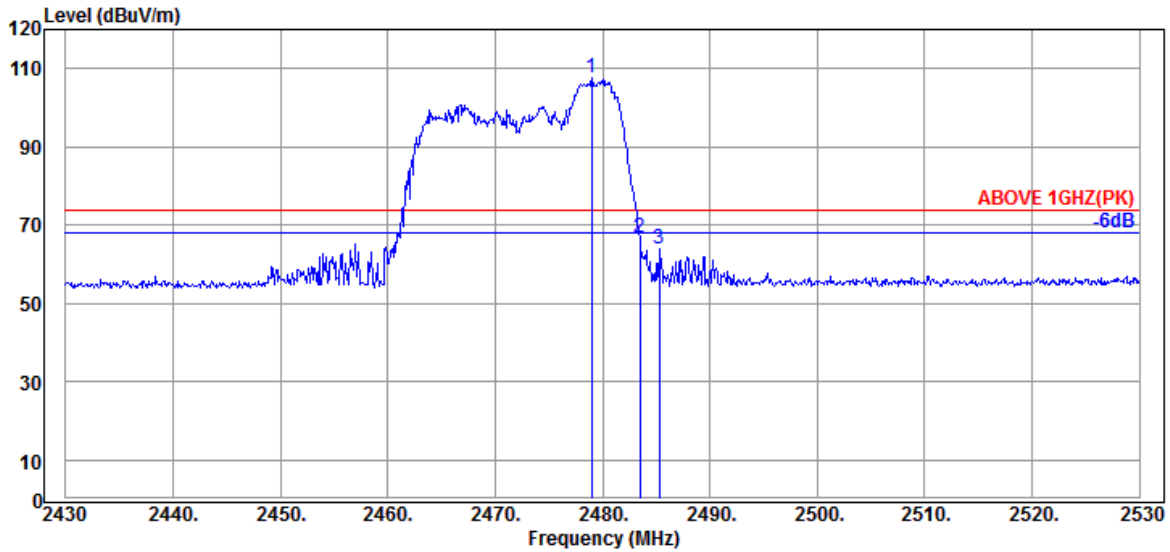

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.34	5.86	34.53	103.94	107.61	---	---	Peak
2483.500	32.43	5.87	34.53	63.03	66.80	74.00	7.20	Peak
2485.300	32.43	5.87	34.53	60.25	64.02	74.00	9.98	Peak

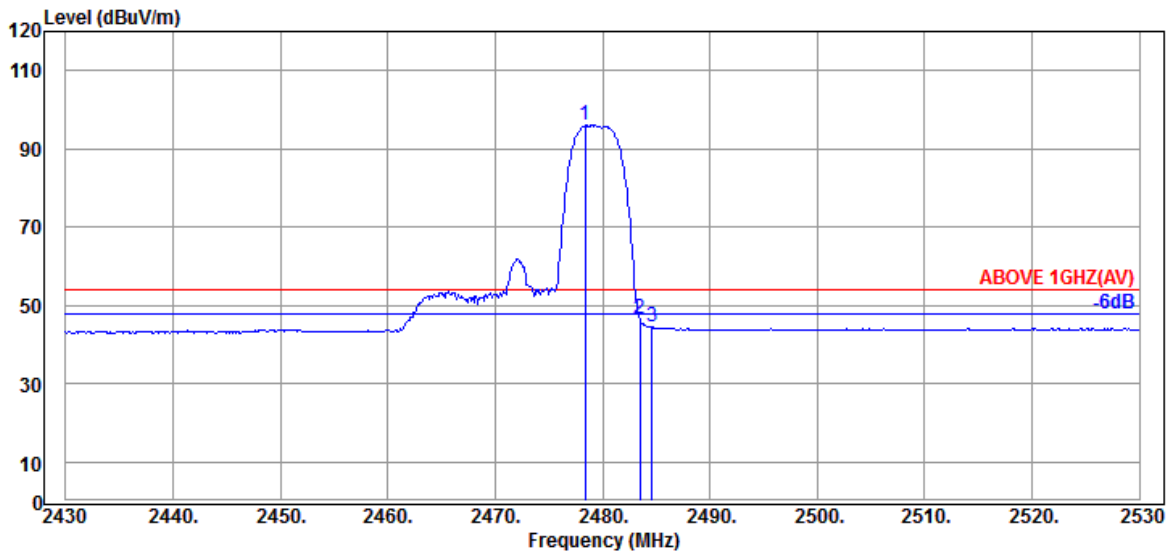


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	32.34	5.86	34.53	92.34	96.01	---	---	Average
2483.500	32.43	5.87	34.53	42.95	46.72	54.00	7.28	Average
2484.600	32.43	5.87	34.53	40.81	44.58	54.00	9.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

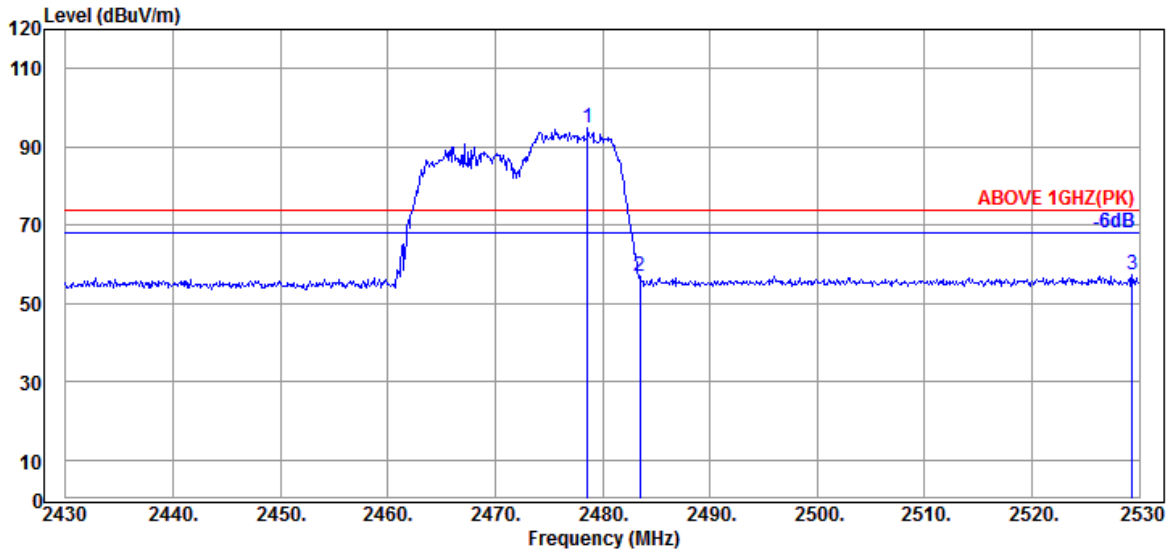

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	32.34	5.86	34.53	91.22	94.89	---	---	Peak
2483.500	32.43	5.87	34.53	53.14	56.91	74.00	17.09	Peak
2529.300	32.49	5.96	34.54	53.30	57.21	74.00	16.79	Peak

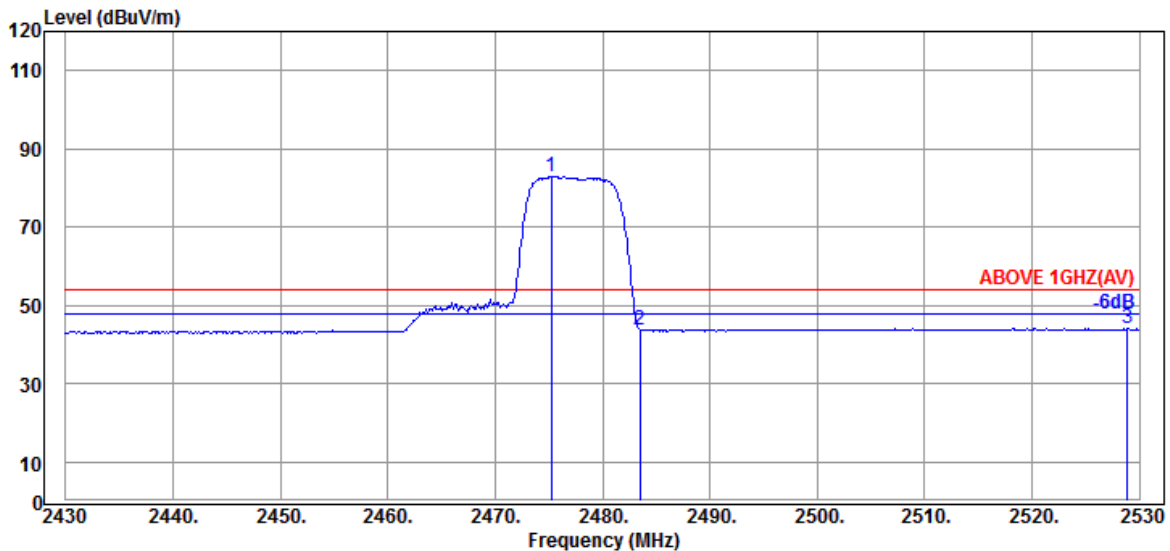


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.200	32.34	5.86	34.53	79.24	82.91	---	---	Average
2483.500	32.43	5.87	34.53	40.12	43.89	54.00	10.11	Average
2528.900	32.49	5.96	34.54	40.18	44.09	54.00	9.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

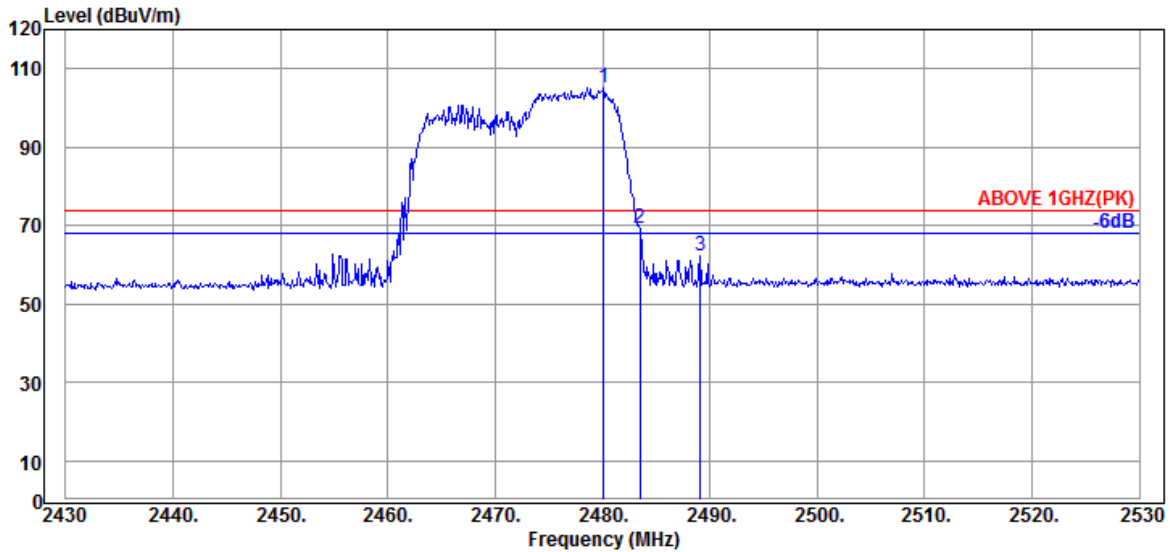

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.34	5.86	34.53	101.42	105.09	---	---	Peak
2483.500	32.43	5.87	34.53	65.31	69.08	74.00	4.92	Peak
2489.100	32.51	5.88	34.53	58.58	62.44	74.00	11.56	Peak

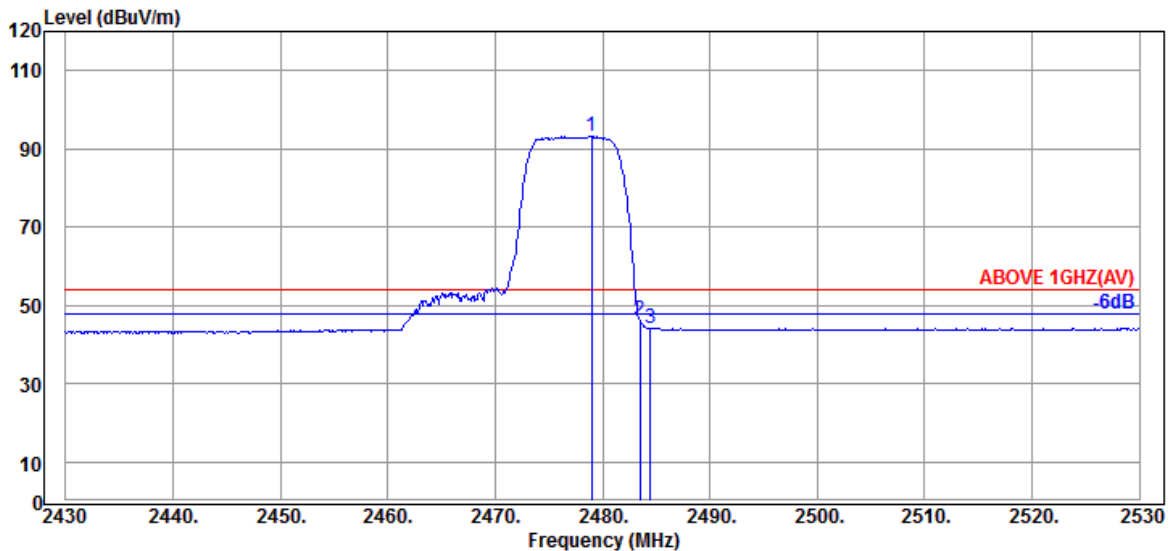


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.34	5.86	34.53	89.42	93.09	---	---	Average
2483.500	32.43	5.87	34.53	42.39	46.16	54.00	7.84	Average
2484.500	32.43	5.87	34.53	40.39	44.16	54.00	9.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

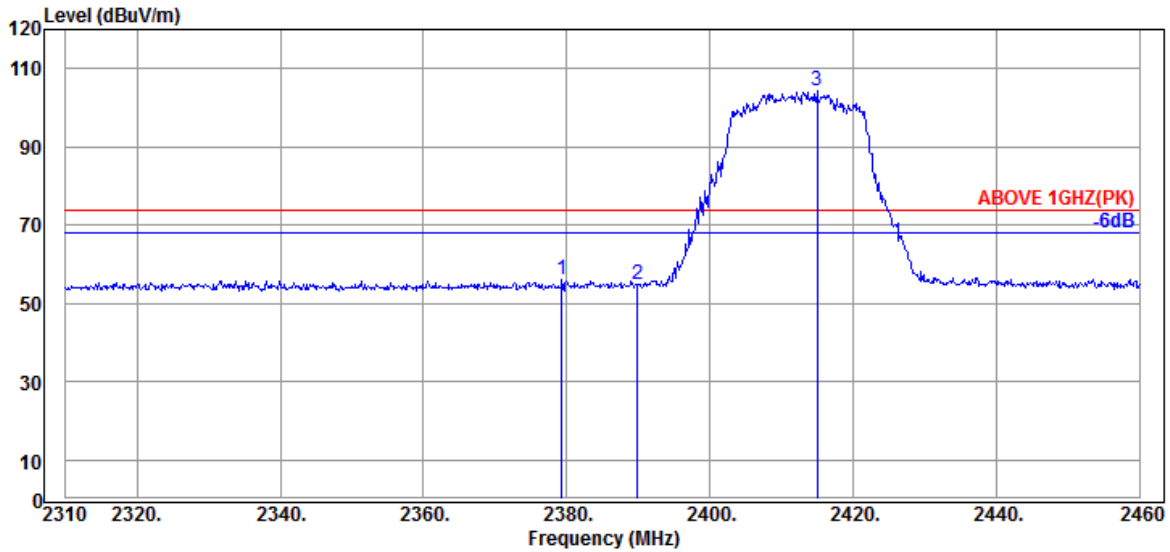

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.300	32.00	5.71	34.51	52.71	55.91	74.00	18.09	Peak
2389.950	32.00	5.72	34.51	51.59	54.80	74.00	19.20	Peak
@ 2415.000	32.00	5.76	34.51	100.93	104.18	---	---	Peak

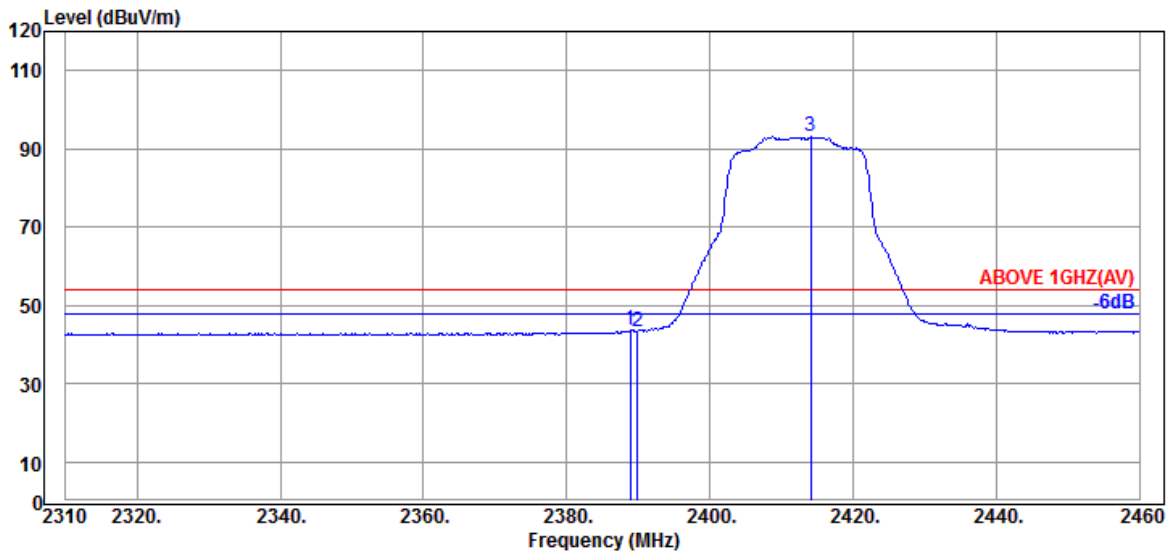


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	32.00	5.72	34.51	40.55	43.76	54.00	10.24	Average
2389.950	32.00	5.72	34.51	40.22	43.43	54.00	10.57	Average
@ 2414.100	32.00	5.76	34.51	89.83	93.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

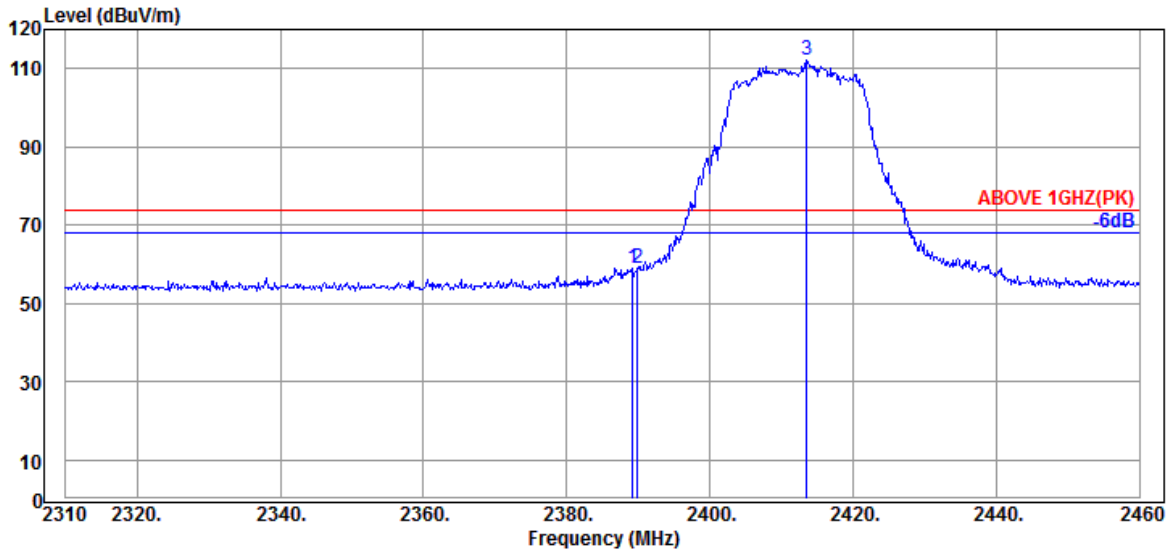

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	55.76	58.97	74.00	15.03	Peak
2389.950	32.00	5.72	34.51	55.83	59.04	74.00	14.96	Peak
@ 2413.500	32.00	5.76	34.51	108.82	112.07	---	---	Peak

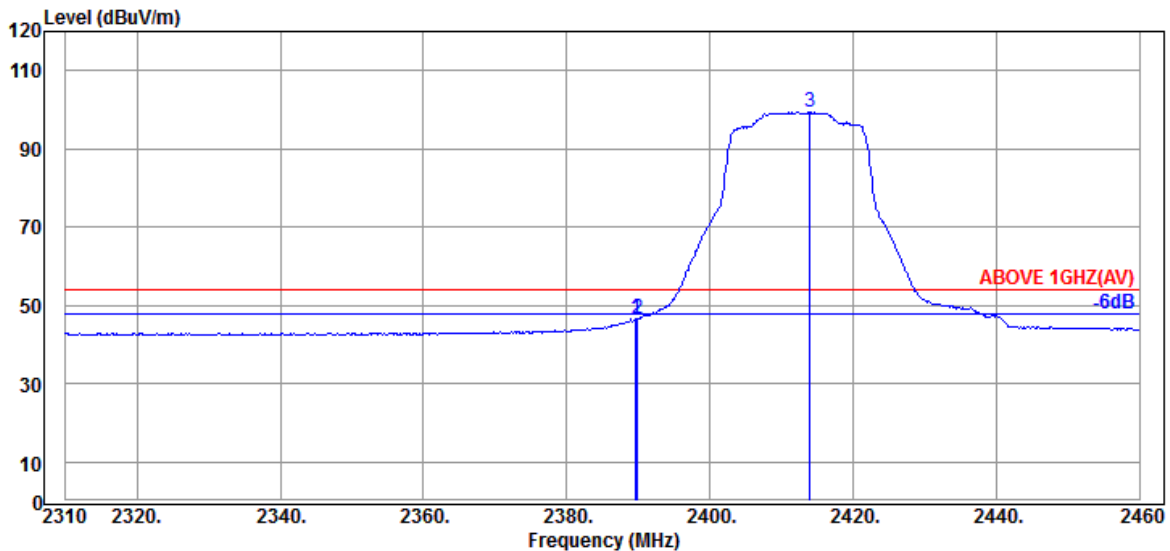


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	32.00	5.72	34.51	43.21	46.42	54.00	7.58	Average
2389.950	32.00	5.72	34.51	43.42	46.63	54.00	7.37	Average
@ 2413.950	32.00	5.76	34.51	96.29	99.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

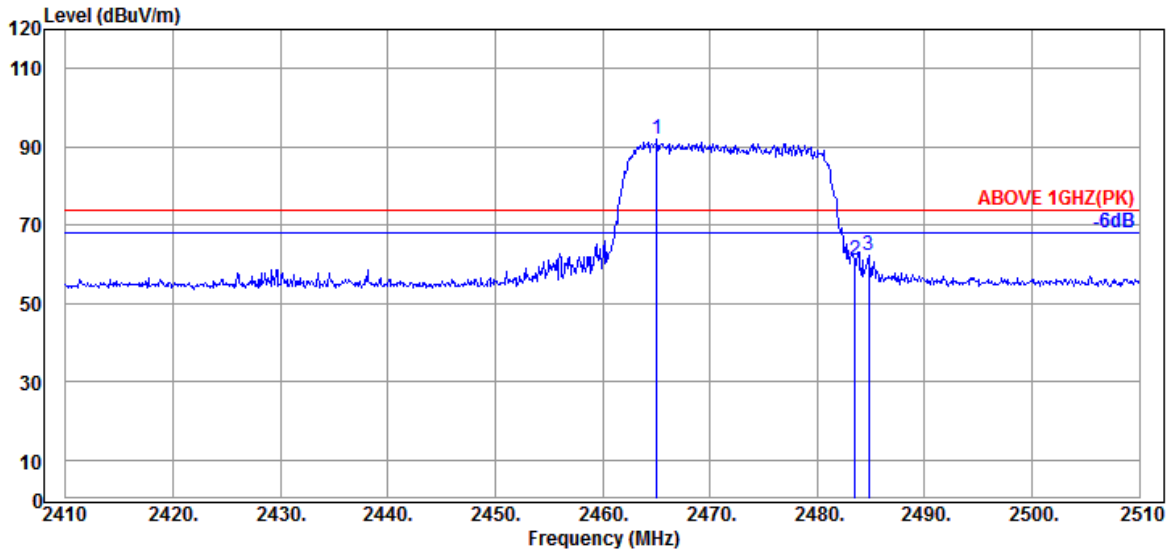

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.17	5.84	34.52	88.54	92.03	---	---	Peak
2483.500	32.43	5.87	34.53	57.43	61.20	74.00	12.80	Peak
2484.800	32.43	5.87	34.53	58.69	62.46	74.00	11.54	Peak

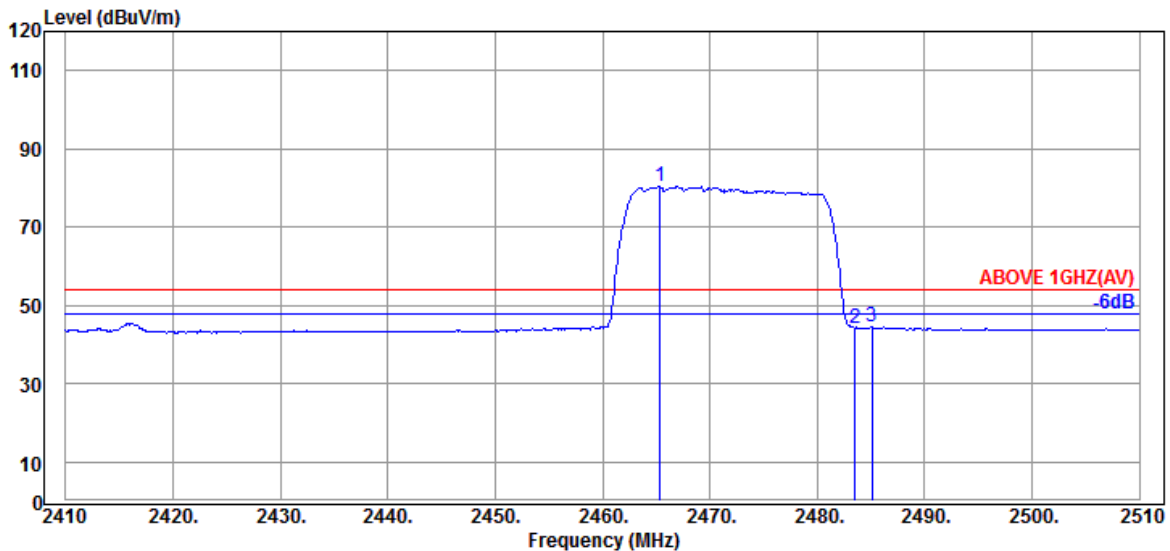


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	32.17	5.84	34.52	76.95	80.44	---	---	Average
2483.500	32.43	5.87	34.53	40.50	44.27	54.00	9.73	Average
2485.100	32.43	5.87	34.53	40.62	44.39	54.00	9.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

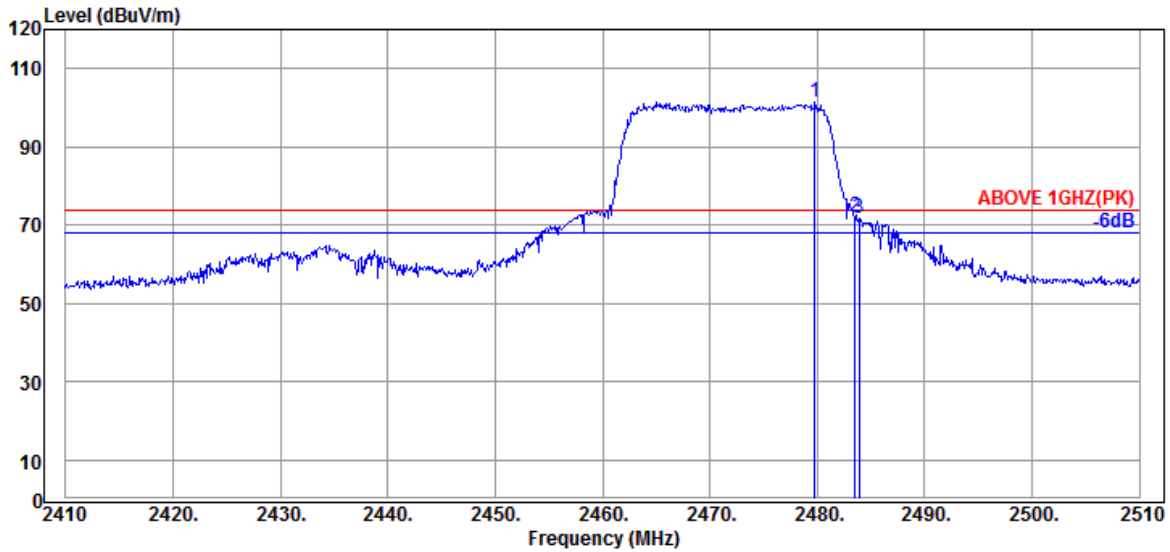

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	32.34	5.86	34.53	97.89	101.56	---	---	Peak
2483.500	32.43	5.87	34.53	68.31	72.08	74.00	1.92	Peak
2483.900	32.43	5.87	34.53	68.07	71.84	74.00	2.16	Peak

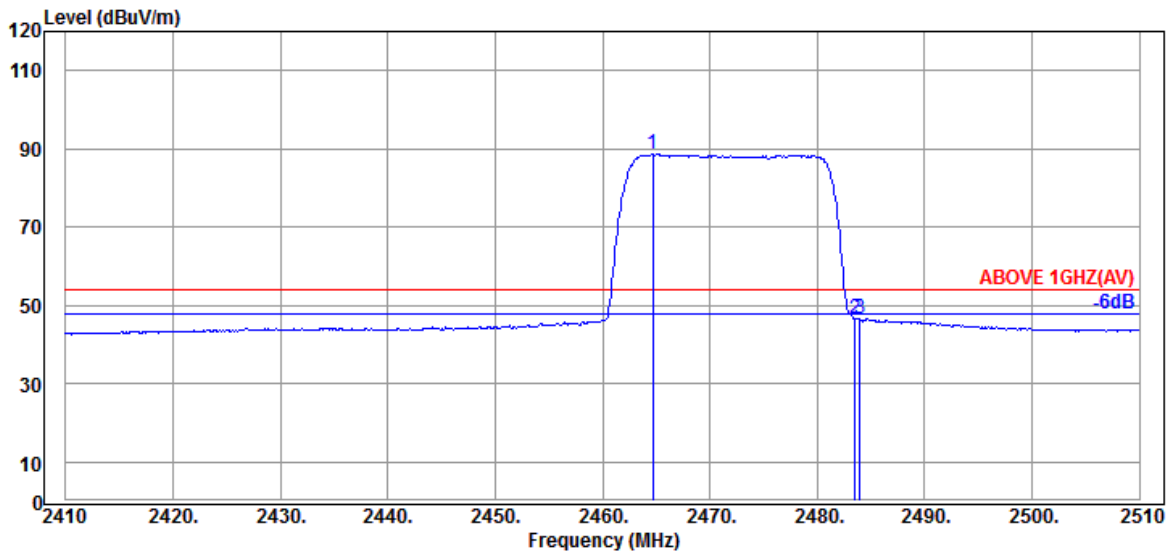


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	32.17	5.84	34.52	85.17	88.66	---	---	Average
2483.500	32.43	5.87	34.53	42.90	46.67	54.00	7.33	Average
2484.000	32.43	5.87	34.53	42.74	46.51	54.00	7.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	BLE (1Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

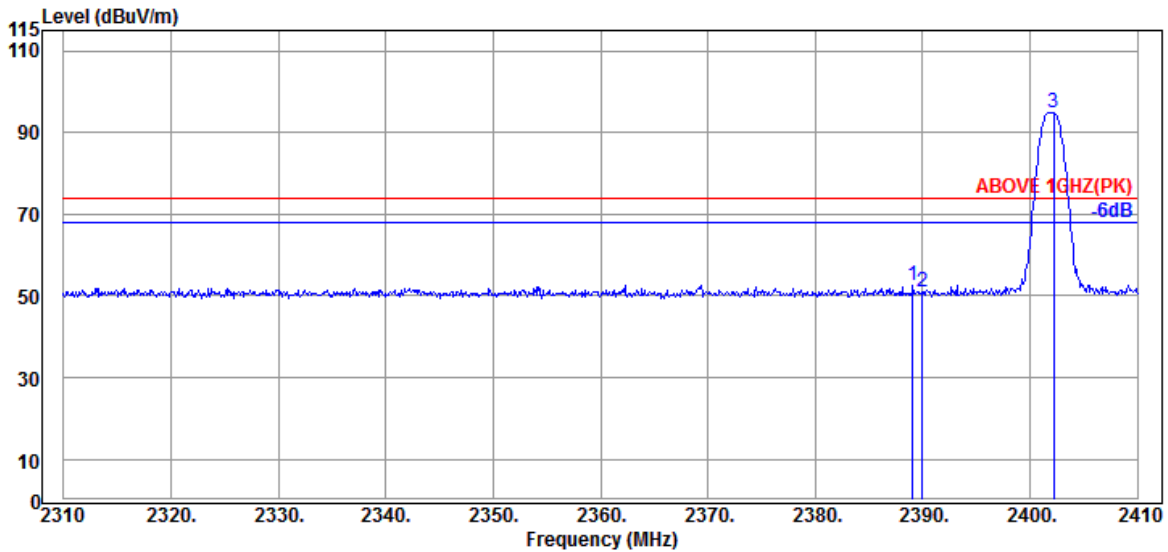

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	32.00	5.72	34.51	49.41	52.62	74.00	21.38	Peak
2390.000	32.00	5.72	34.51	47.83	51.04	74.00	22.96	Peak
@ 2402.200	32.00	5.74	34.51	91.55	94.78	---	---	Peak

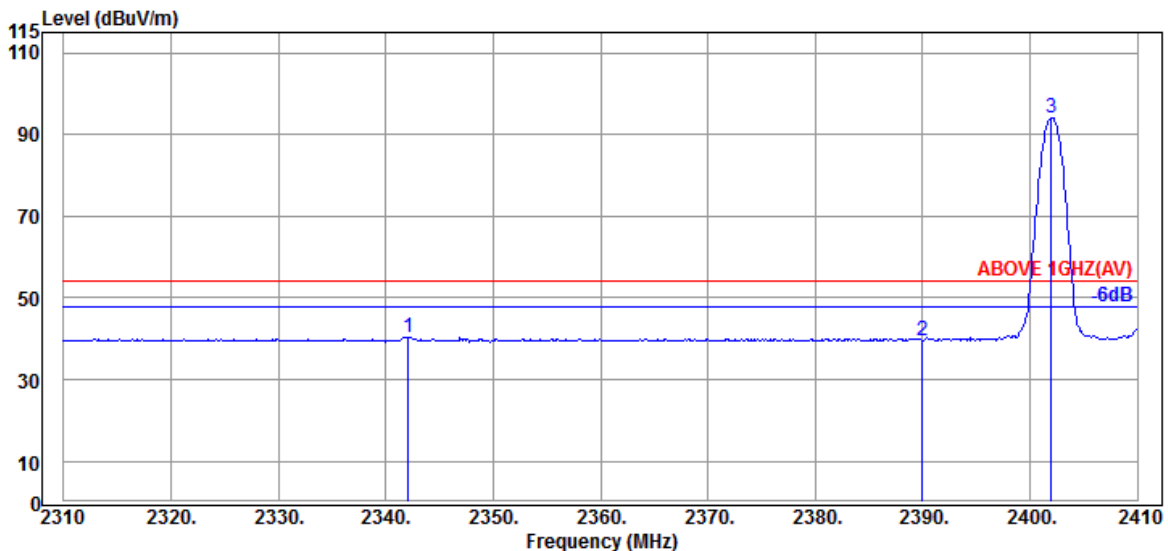


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.100	32.05	5.64	34.50	37.13	40.32	54.00	13.68	Average
2390.000	32.00	5.72	34.51	36.48	39.69	54.00	14.31	Average
@ 2402.000	32.00	5.74	34.51	90.93	94.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

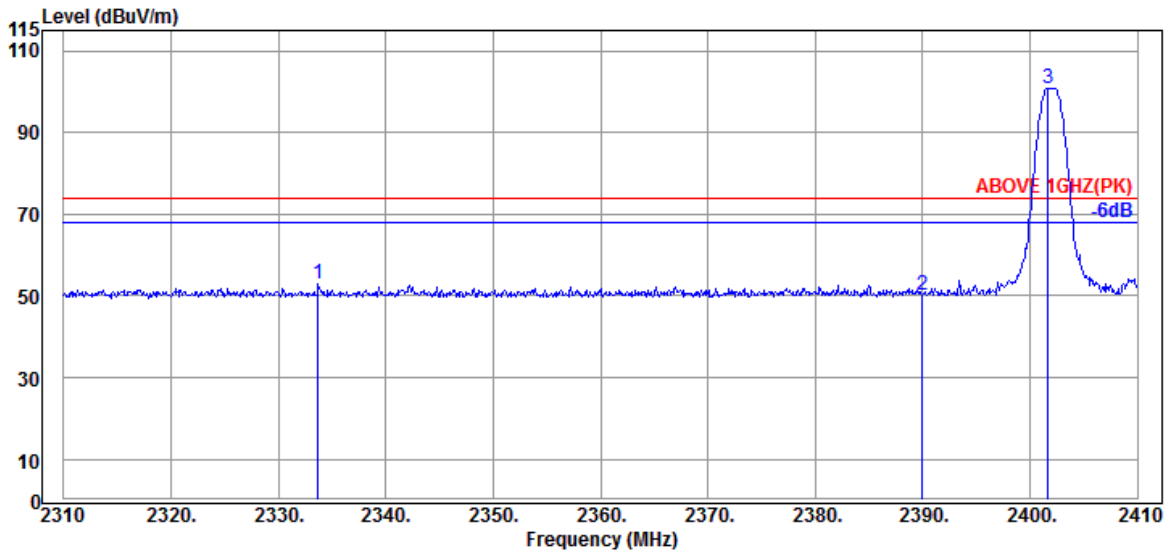

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2333.700	32.08	5.63	34.50	49.63	52.84	74.00	21.16	Peak
2390.000	32.00	5.72	34.51	47.07	50.28	74.00	23.72	Peak
@ 2401.700	32.00	5.74	34.51	97.68	100.91	---	---	Peak

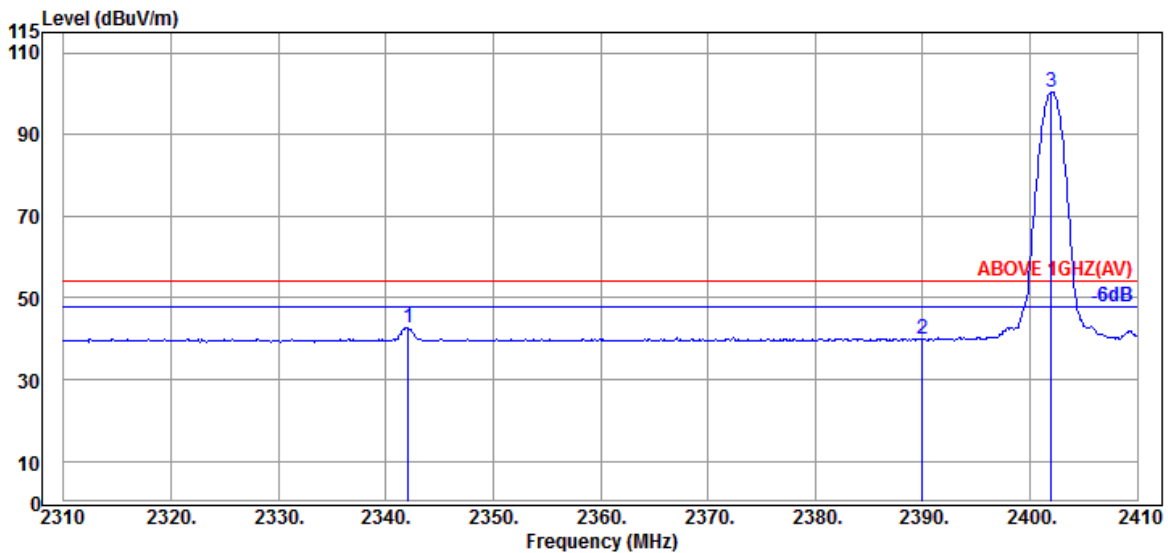


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.100	32.05	5.64	34.50	39.59	42.78	54.00	11.22	Average
2390.000	32.00	5.72	34.51	36.75	39.96	54.00	14.04	Average
@ 2402.000	32.00	5.74	34.51	97.17	100.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

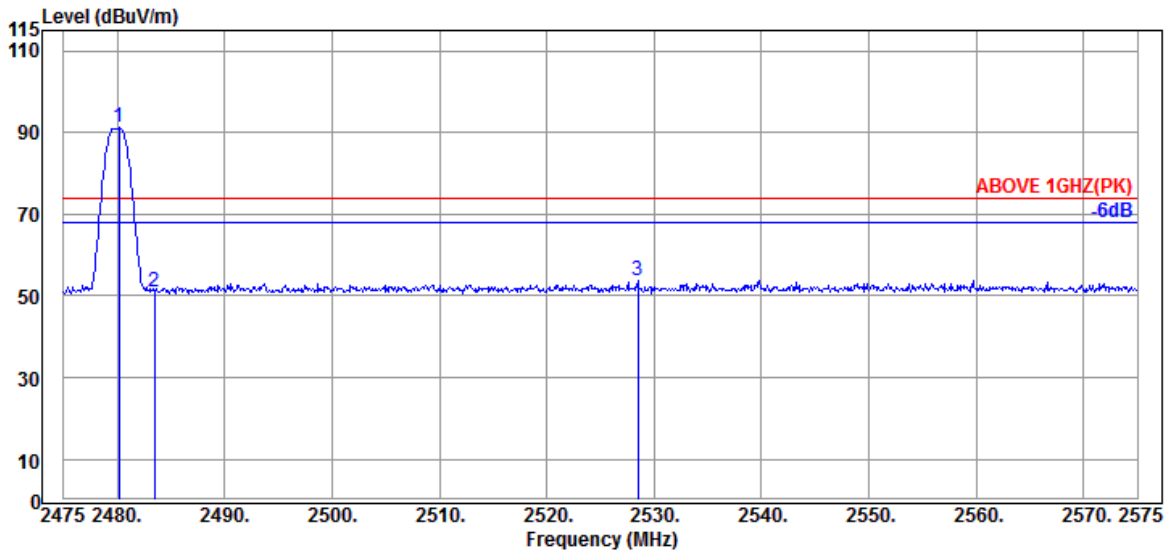

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	32.34	5.86	34.53	87.44	91.11	---	---	Peak
2483.500	32.43	5.87	34.53	47.38	51.15	74.00	22.85	Peak
2528.500	32.49	5.96	34.54	49.80	53.71	74.00	20.29	Peak

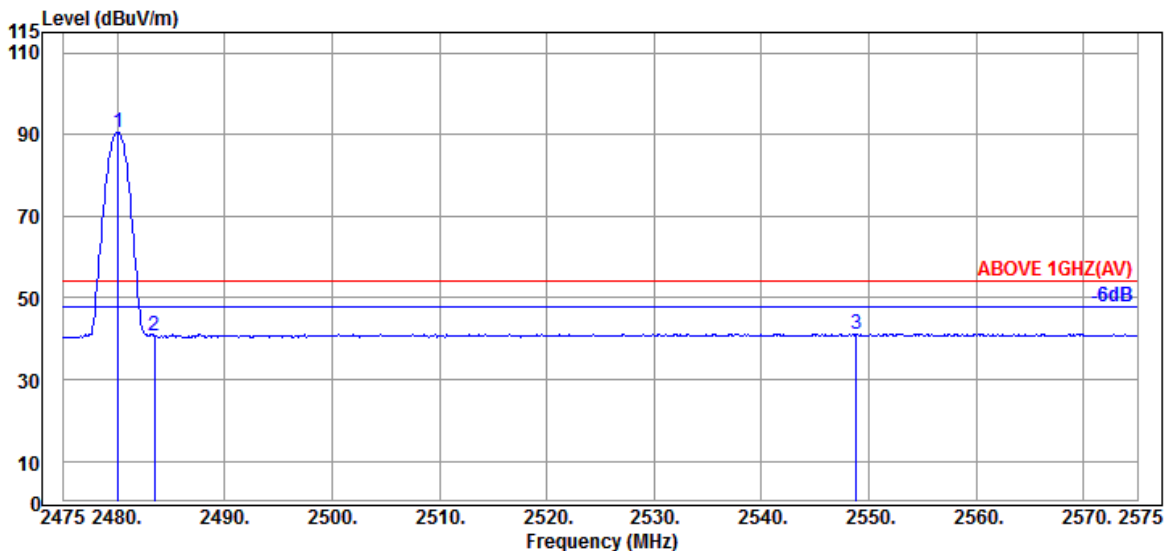


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.34	5.86	34.53	86.89	90.56	---	---	Average
2483.500	32.43	5.87	34.53	36.87	40.64	54.00	13.36	Average
2548.800	32.40	6.01	34.54	37.36	41.23	54.00	12.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

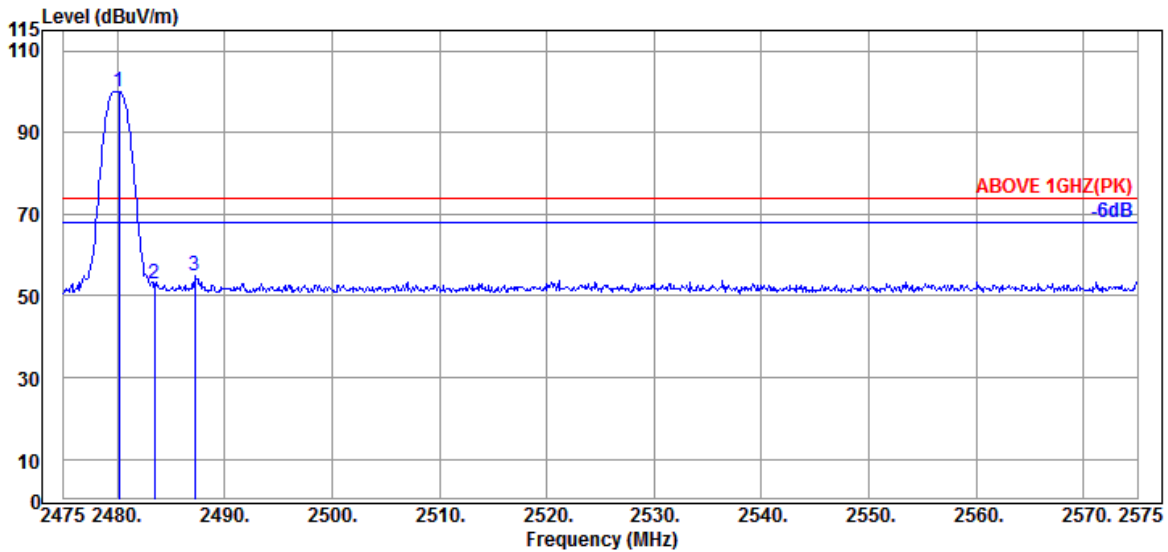

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.200	32.34	5.86	34.53	96.19	99.86	---	---	Peak
2483.500	32.43	5.87	34.53	49.18	52.95	74.00	21.05	Peak
2487.200	32.43	5.87	34.53	51.30	55.07	74.00	18.93	Peak

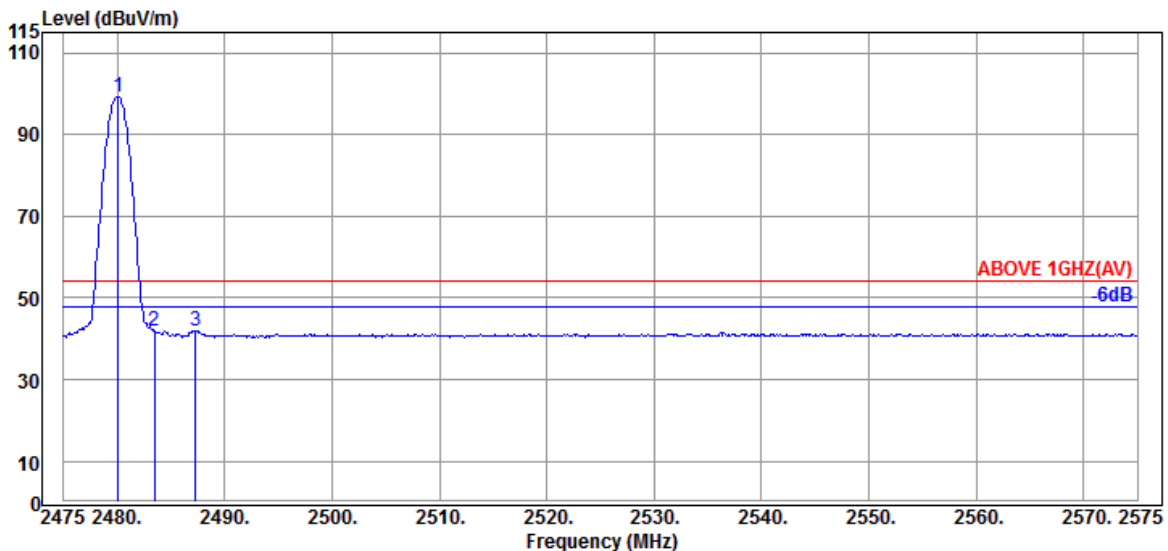


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	32.34	5.86	34.53	95.69	99.36	---	---	Average
2483.500	32.43	5.87	34.53	37.95	41.72	54.00	12.28	Average
2487.300	32.43	5.87	34.53	38.26	42.03	54.00	11.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

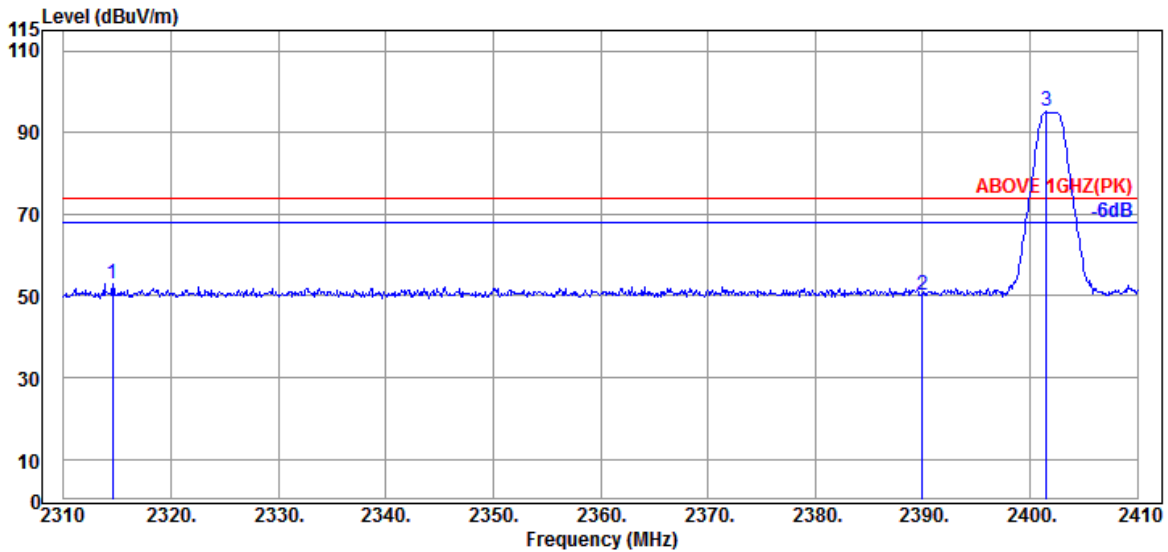

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2314.600	32.15	5.60	34.49	49.84	53.10	74.00	20.90	Peak
2390.000	32.00	5.72	34.51	47.03	50.24	74.00	23.76	Peak
@ 2401.500	32.00	5.74	34.51	91.82	95.05	---	---	Peak

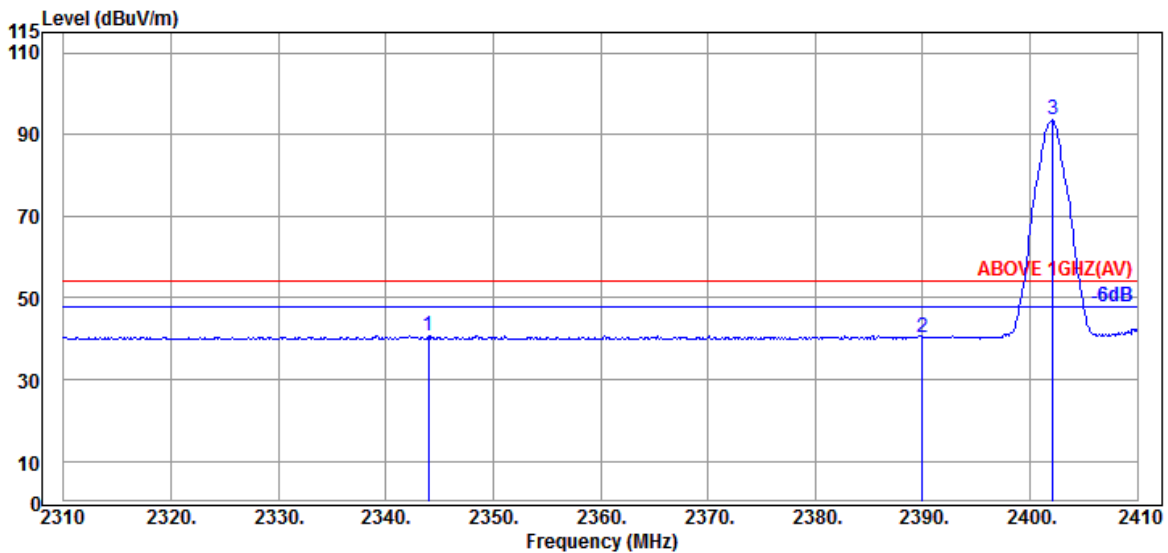


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.000	32.03	5.65	34.50	37.70	40.88	54.00	13.12	Average
2390.000	32.00	5.72	34.51	37.08	40.29	54.00	13.71	Average
@ 2402.100	32.00	5.74	34.51	90.24	93.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

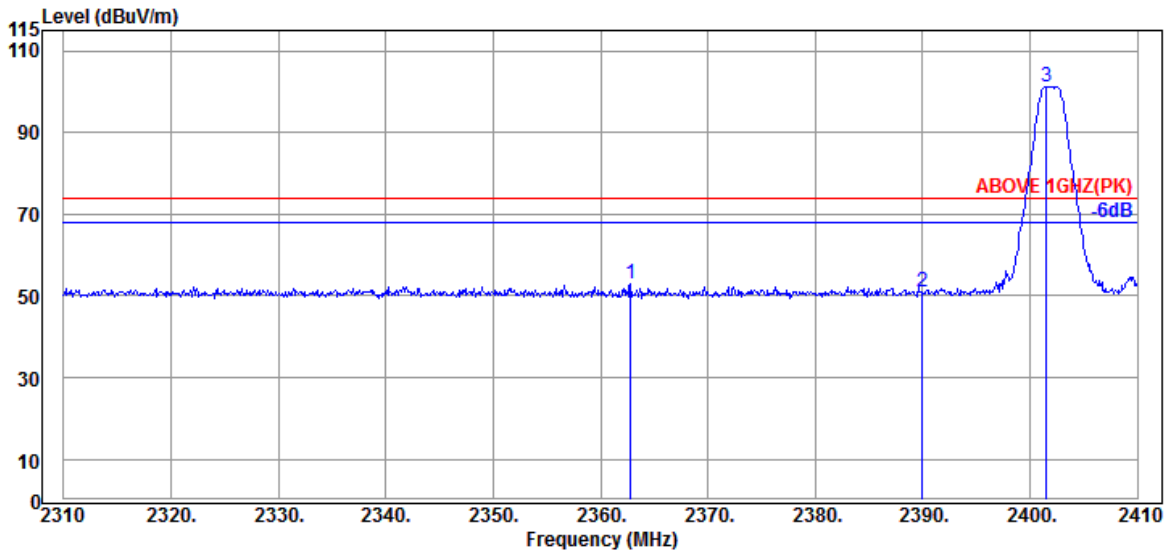

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2362.800	32.00	5.67	34.50	49.72	52.89	74.00	21.11	Peak
2390.000	32.00	5.72	34.51	47.78	50.99	74.00	23.01	Peak
@ 2401.500	32.00	5.74	34.51	97.98	101.21	---	---	Peak

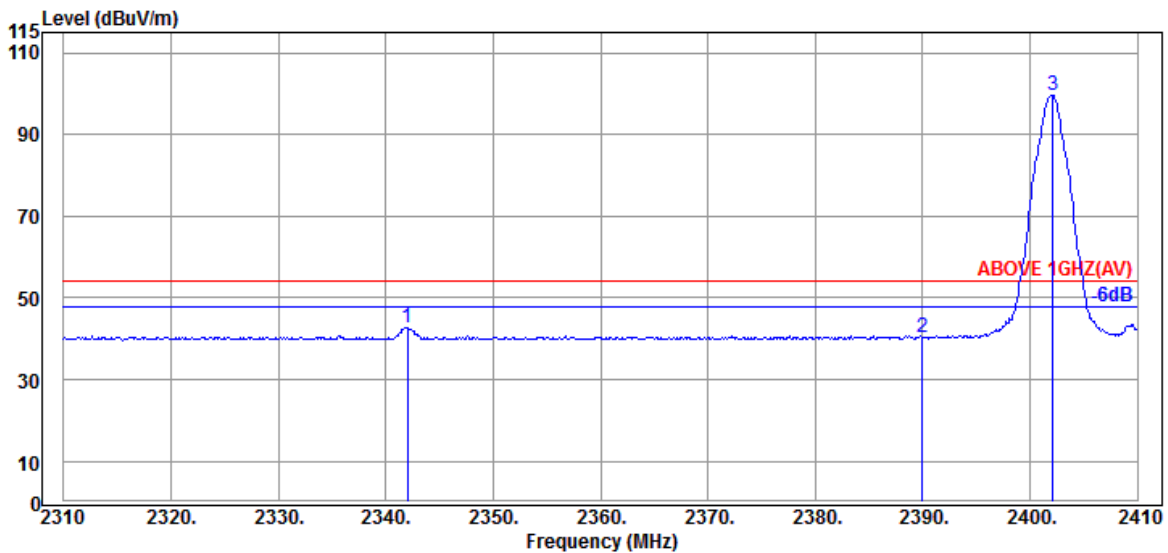


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	32.05	5.64	34.50	39.64	42.83	54.00	11.17	Average
2390.000	32.00	5.72	34.51	37.10	40.31	54.00	13.69	Average
@ 2402.100	32.00	5.74	34.51	96.36	99.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

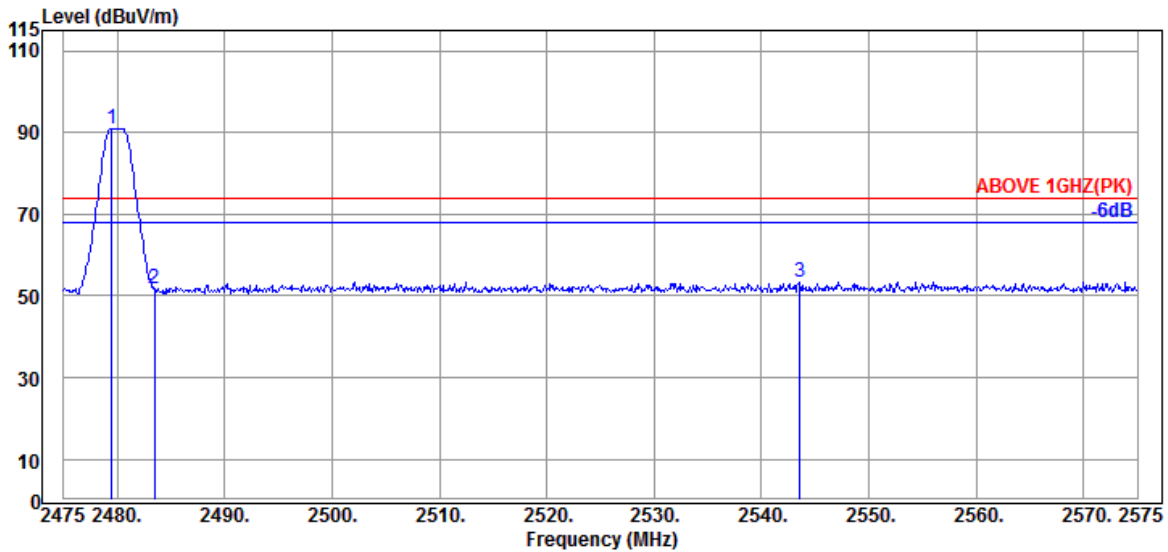

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.500	32.34	5.86	34.53	87.32	90.99	---	---	Peak
2483.500	32.43	5.87	34.53	47.88	51.65	74.00	22.35	Peak
2543.600	32.43	6.00	34.54	49.60	53.49	74.00	20.51	Peak

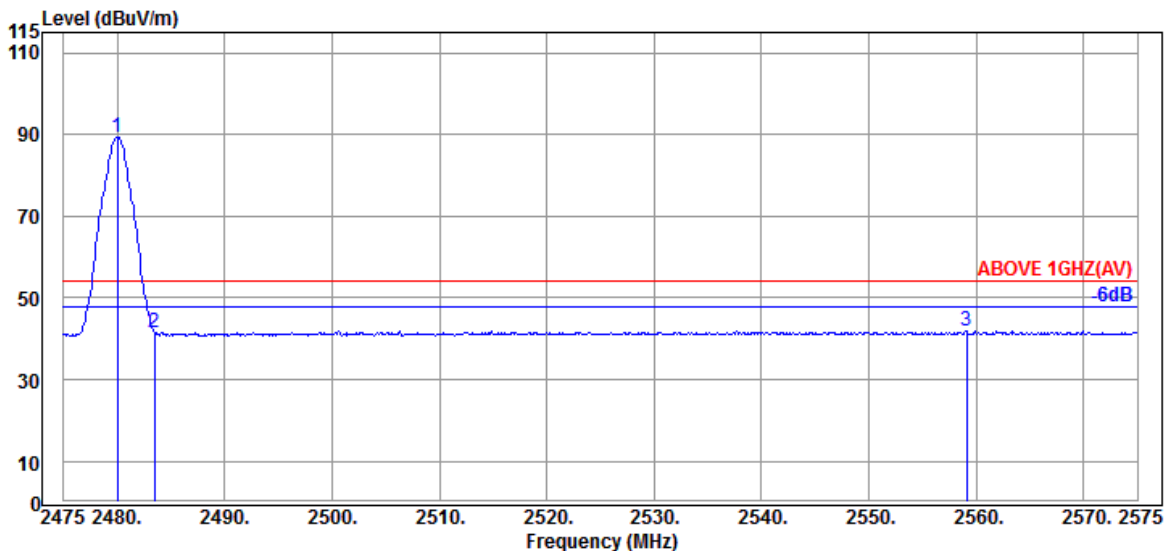


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	32.34	5.86	34.53	85.81	89.48	---	---	Average
2483.500	32.43	5.87	34.53	37.82	41.59	54.00	12.41	Average
2559.100	32.39	6.03	34.54	37.94	41.82	54.00	12.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

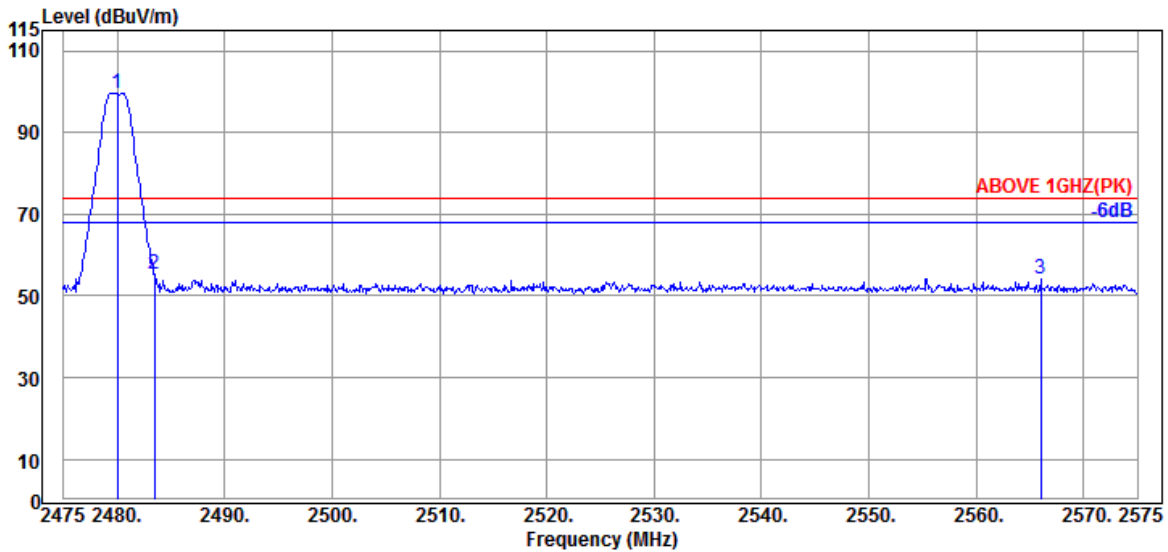

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.34	5.86	34.53	96.02	99.69	---	---	Peak
2483.500	32.43	5.87	34.53	51.63	55.40	74.00	18.60	Peak
2566.000	32.37	6.05	34.55	50.29	54.16	74.00	19.84	Peak

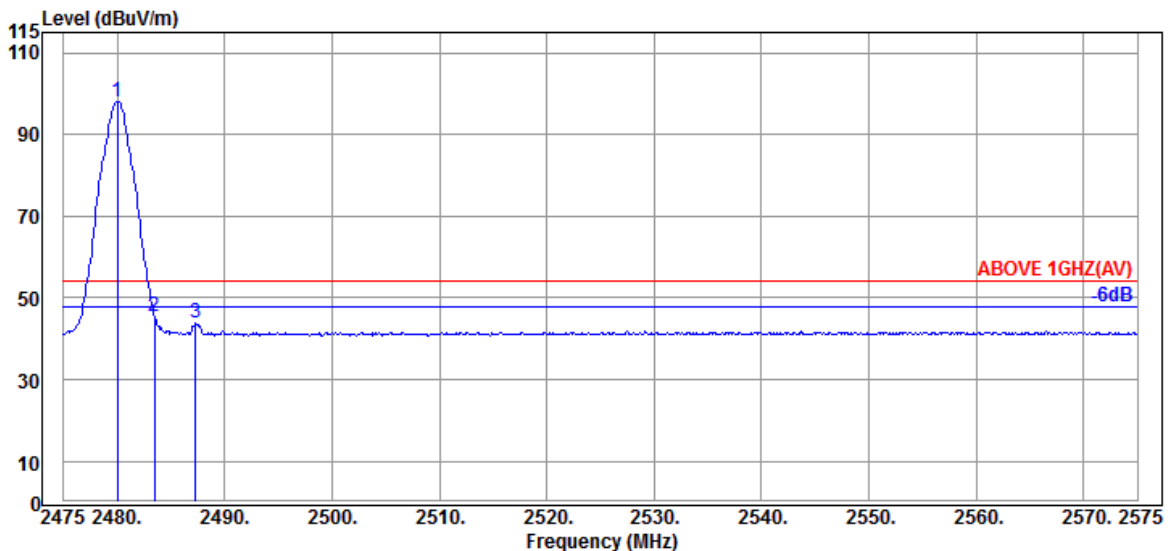

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.34	5.86	34.53	94.48	98.15	---	---	Average
2483.500	32.43	5.87	34.53	41.54	45.31	54.00	8.69	Average
2487.300	32.43	5.87	34.53	40.07	43.84	54.00	10.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..



**Spot Check**


- **Test SKU #2 (with INPAQ Antenna and GM main board)**

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

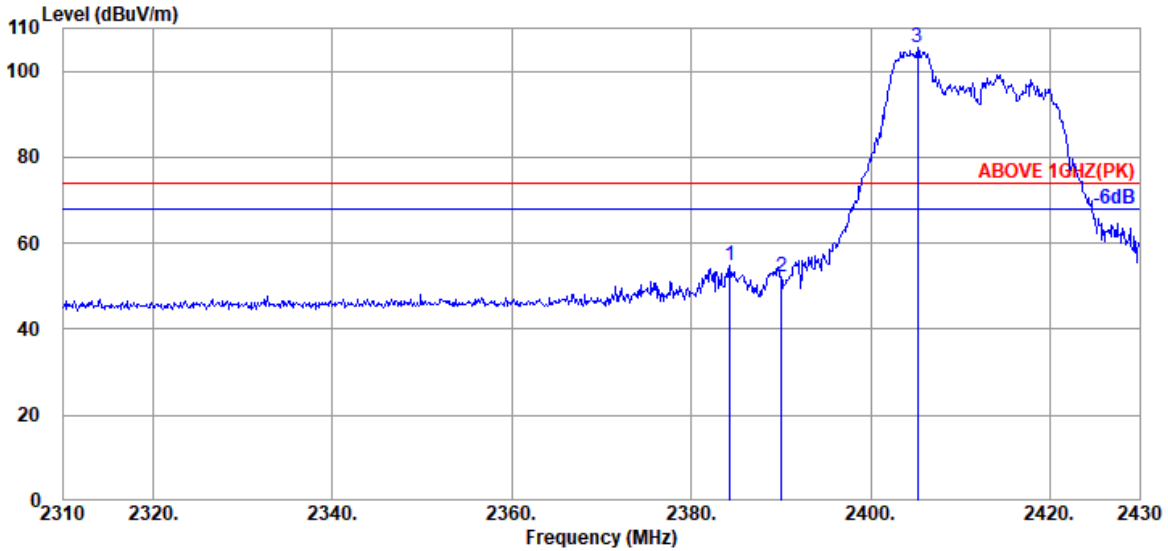

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.280	28.21	5.72	39.93	60.71	54.71	74.00	19.29	Peak
2390.040	28.21	5.72	39.93	58.02	52.02	74.00	21.98	Peak
@ 2405.280	28.14	5.75	39.93	111.39	105.35	---	---	Peak

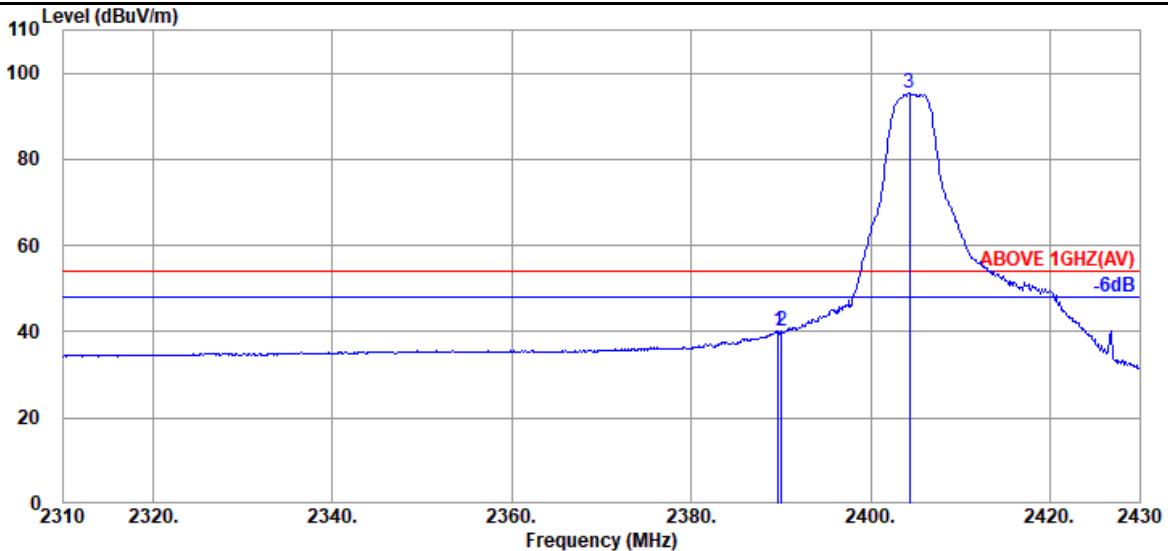


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	45.99	39.99	54.00	14.01	Average
2390.040	28.21	5.72	39.93	46.06	40.06	54.00	13.94	Average
@ 2404.320	28.14	5.75	39.93	101.36	95.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

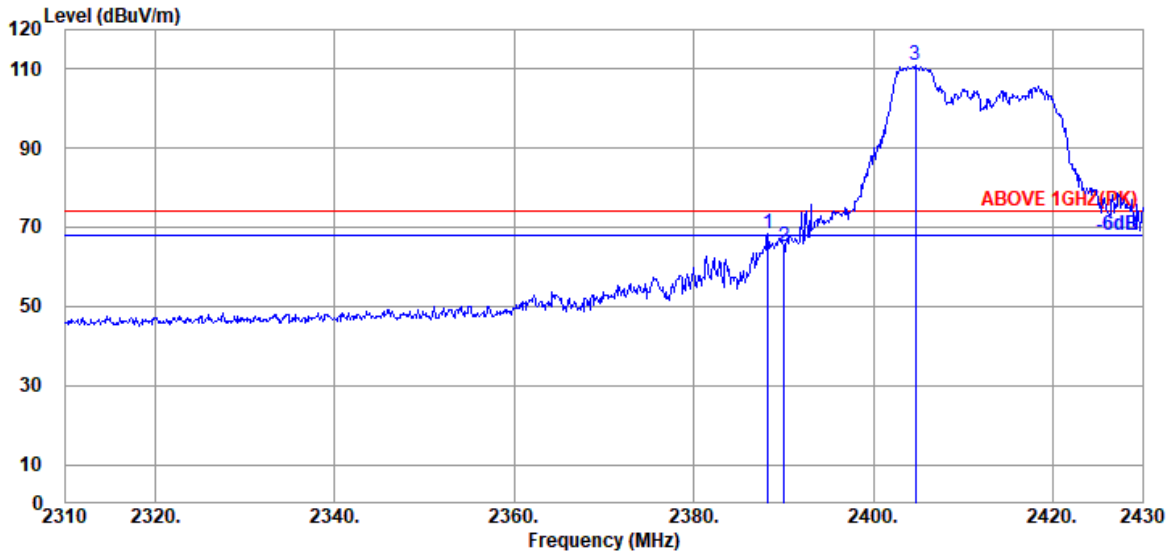

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.240	28.21	5.72	39.93	74.57	68.57	74.00	5.43	Peak
2390.040	28.21	5.72	39.93	71.14	65.14	74.00	8.86	Peak
@ 2404.680	28.14	5.75	39.93	117.22	111.18	---	---	Peak

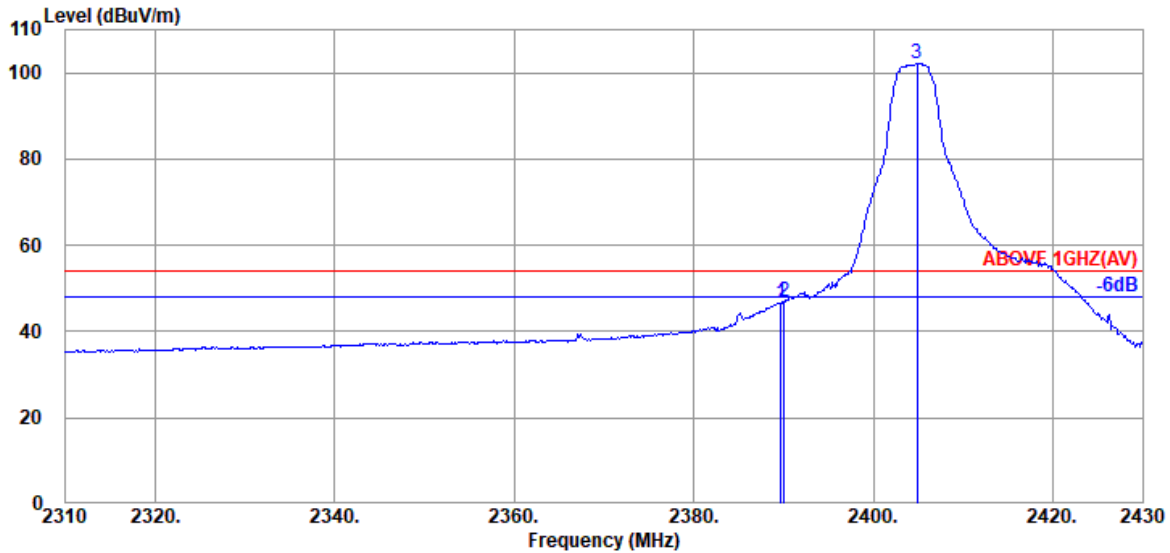

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	52.68	46.68	54.00	7.32	Average
2390.040	28.21	5.72	39.93	52.93	46.93	54.00	7.07	Average
@ 2404.920	28.14	5.75	39.93	108.31	102.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Spot Check**


- **Test SKU #2 (with LUXSHARE-ICT Antenna and GM main board)**

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

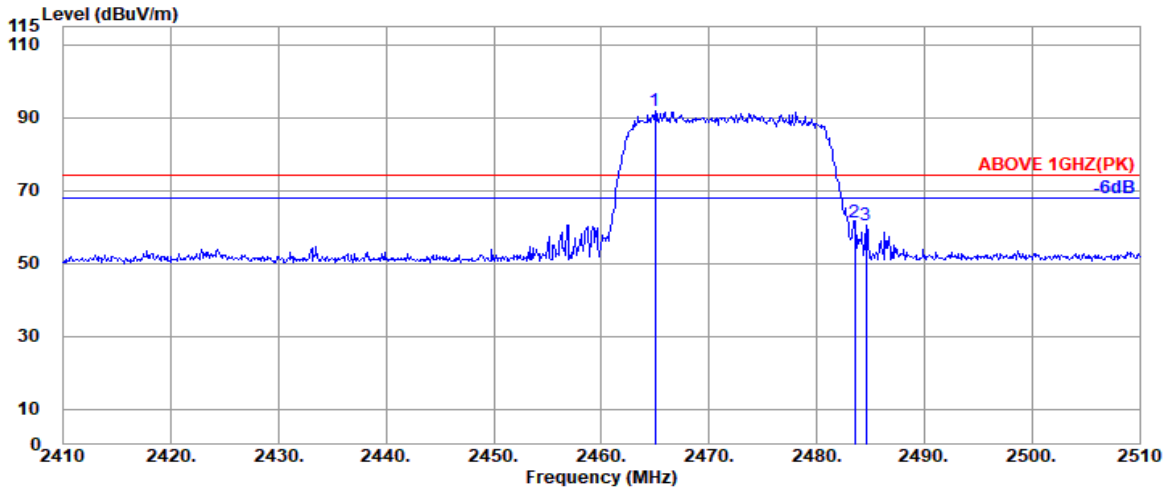

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.17	5.84	34.52	88.24	91.73	---	---	Peak
2483.500	32.43	5.87	34.53	57.61	61.38	74.00	12.62	Peak
2484.600	32.43	5.87	34.53	56.78	60.55	74.00	13.45	Peak

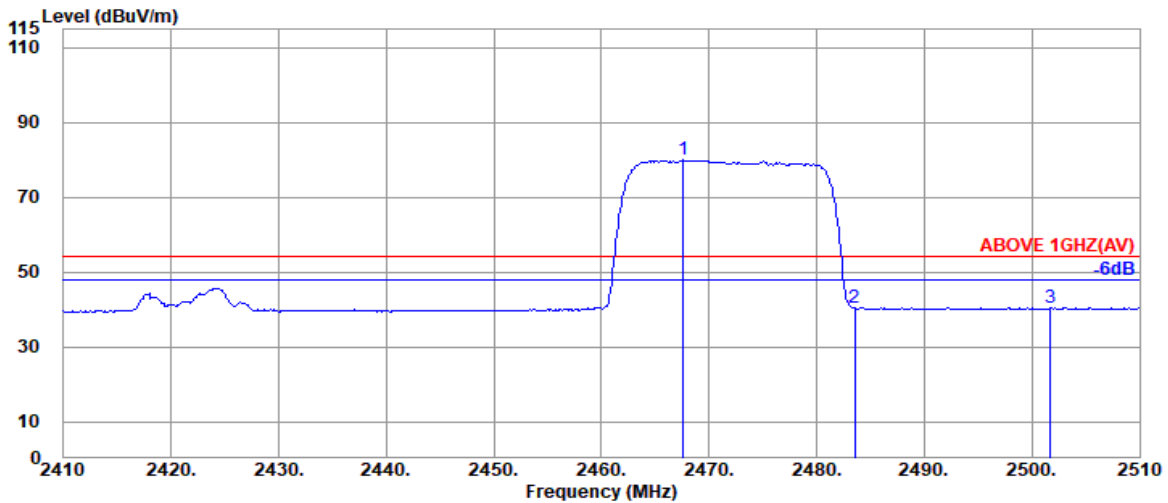


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	32.26	5.85	34.52	76.29	79.88	---	---	Average
2483.500	32.43	5.87	34.53	36.49	40.26	54.00	13.74	Average
2501.700	32.60	5.89	34.53	36.49	40.45	54.00	13.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

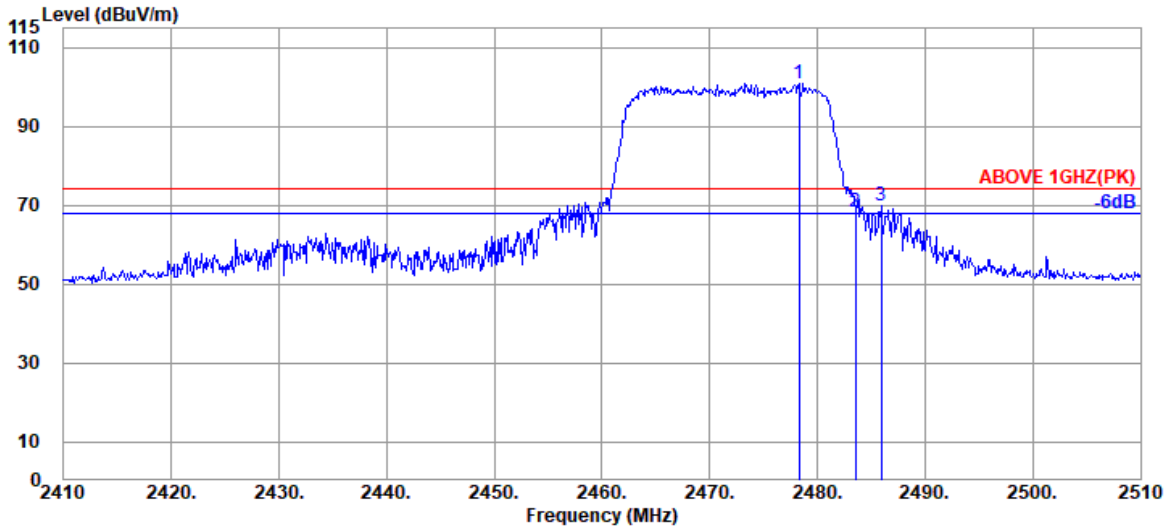

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	32.34	5.86	34.53	97.27	100.94	---	---	Peak
2483.500	32.43	5.87	34.53	64.56	68.33	74.00	5.67	Peak
2485.900	32.43	5.87	34.53	65.92	69.69	74.00	4.31	Peak

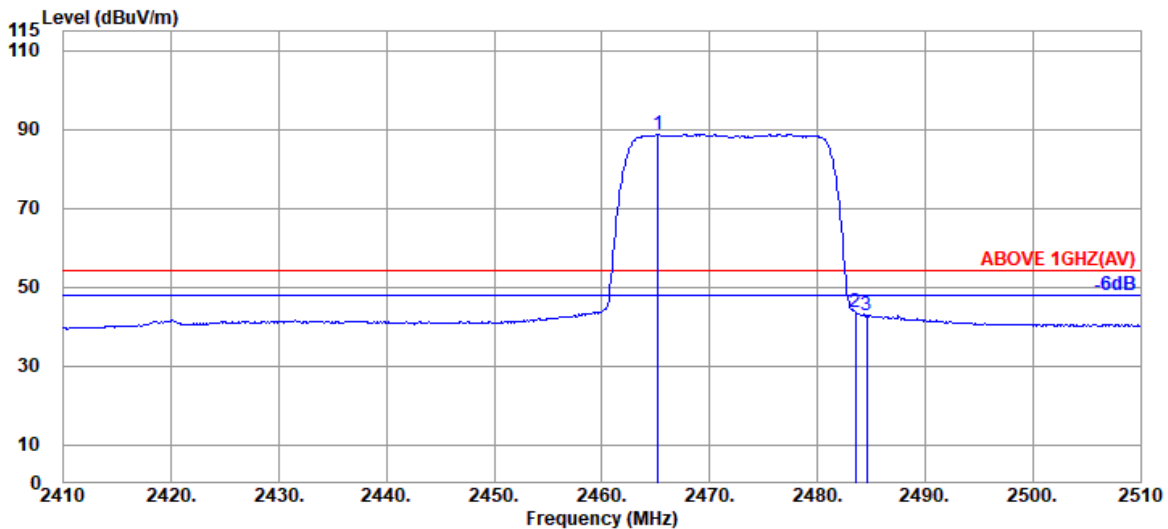

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	32.17	5.84	34.52	85.03	88.52	---	---	Average
2483.500	32.43	5.87	34.53	39.74	43.51	54.00	10.49	Average
2484.600	32.43	5.87	34.53	38.95	42.72	54.00	11.28	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

## A.2.2 Emissions outside the frequency band:

 ● **Test SKU #1 (with INPAQ Antenna and PM main board)**

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.56	45.10	54.00	8.90	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.46	45.00	54.00	9.00	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.63	44.17	54.00	9.83	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.92	46.46	54.00	7.54	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.84	44.38	54.00	9.62	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.55	44.09	54.00	9.91	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.67	45.21	54.00	8.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.52	46.06	54.00	7.94	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.40	43.94	54.00	10.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.10	45.64	54.00	8.36	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.45	43.99	54.00	10.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.93	44.47	54.00	9.53	Peak

Mode		BLE (2Mbps)			Frequency		TX 2402MHz	
------	--	-------------	--	--	-----------	--	------------	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	40.84	42.98	54.00	11.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	41.44	43.58	54.00	10.42	Peak

Mode		BLE (2Mbps)			Frequency		TX 2440MHz	
------	--	-------------	--	--	-----------	--	------------	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	43.35	45.82	54.00	8.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	42.91	45.38	54.00	8.62	Peak

Mode		BLE (2Mbps)			Frequency		TX 2480MHz	
------	--	-------------	--	--	-----------	--	------------	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.74	39.31	42.86	45.69	54.00	8.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.74	39.31	42.82	45.65	54.00	8.35	Peak

● **Test SKU #2 (with LUXSHARE-ICT Antenna and PM main board)**

Mode	802.11b				Frequency	TX 2442MHz		
------	---------	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.22	40.49	54.00	13.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.68	39.95	54.00	14.05	Peak

Mode	802.11g				Frequency	TX 2442MHz		
------	---------	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	30.80	39.07	54.00	14.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.13	40.40	54.00	13.60	Peak

Mode	802.11n-HT20				Frequency	TX 2442MHz		
------	--------------	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	30.79	39.06	54.00	14.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.70	39.97	54.00	14.03	Peak



Mode	802.11n-HT40				Frequency	TX 2442MHz		
------	--------------	--	--	--	-----------	------------	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.08	40.35	54.00	13.65	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.30	39.57	54.00	14.43	Peak

Mode	802.11ax-HE20				Frequency	TX 2442MHz		
------	---------------	--	--	--	-----------	------------	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.33	39.60	54.00	14.40	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.50	39.77	54.00	14.23	Peak

Mode	802.11ax-HE40				Frequency	TX 2442MHz		
------	---------------	--	--	--	-----------	------------	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.01	39.28	54.00	14.72	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.54	39.81	54.00	14.19	Peak

Mode		BLE (2Mbps)			Frequency		TX 2402MHz	
------	--	-------------	--	--	-----------	--	------------	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	32.71	40.91	54.00	13.09	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	35.41	43.61	54.00	10.39	Peak

Mode		BLE (2Mbps)			Frequency		TX 2440MHz	
------	--	-------------	--	--	-----------	--	------------	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4880.000	34.10	8.62	34.42	31.24	39.54	54.00	14.46	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4880.000	34.10	8.62	34.42	30.94	39.24	54.00	14.76	Peak

Mode		BLE (2Mbps)			Frequency		TX 2480MHz	
------	--	-------------	--	--	-----------	--	------------	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4960.000	34.22	8.74	34.41	32.75	41.30	54.00	12.70	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4960.000	34.22	8.74	34.41	32.84	41.39	54.00	12.61	Peak

### Spot Check

#### ● Test SKU #2 (with INPAQ Antenna and GM main board)

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.56	45.10	54.00	8.90	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.46	45.00	54.00	9.00	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.63	44.17	54.00	9.83	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.92	46.46	54.00	7.54	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.84	44.38	54.00	9.62	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.55	44.09	54.00	9.91	Peak

Mode	802.11n-HT40			Frequency	TX 2442MHz			
------	--------------	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.67	45.21	54.00	8.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.52	46.06	54.00	7.94	Peak

Mode	802.11ax-HE20			Frequency	TX 2442MHz			
------	---------------	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.40	43.94	54.00	10.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.10	45.64	54.00	8.36	Peak

Mode	802.11ax-HE40			Frequency	TX 2442MHz			
------	---------------	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.45	43.99	54.00	10.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.93	44.47	54.00	9.53	Peak

Mode		BLE (2Mbps)			Frequency		TX 2440MHz	
<b>Antenna at Horizontal Polarization</b>								
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	43.35	45.82	54.00	8.18	Peak
<b>Antenna at Vertical Polarization</b>								
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	42.91	45.38	54.00	8.62	Peak

### Spot Check

● **Test SKU #2 (with LUXSHARE-ICT Antenna and GM main board)**

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.10	44.64	54.00	9.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.29	44.83	54.00	9.17	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	40.86	43.40	54.00	10.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.93	44.47	54.00	9.53	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.25	44.79	54.00	9.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.75	45.29	54.00	8.71	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	40.81	43.35	54.00	10.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.58	44.12	54.00	9.88	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.43	44.97	54.00	9.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.58	45.12	54.00	8.88	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.40	44.94	54.00	9.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.97	44.51	54.00	9.49	Peak

Mode		BLE (2Mbps)			Frequency		TX 2402MHz	
<b>Antenna at Horizontal Polarization</b>								
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	41.92	44.06	54.00	9.94	Peak
<b>Antenna at Vertical Polarization</b>								
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	42.04	44.18	54.00	9.82	Peak

### A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.