



Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

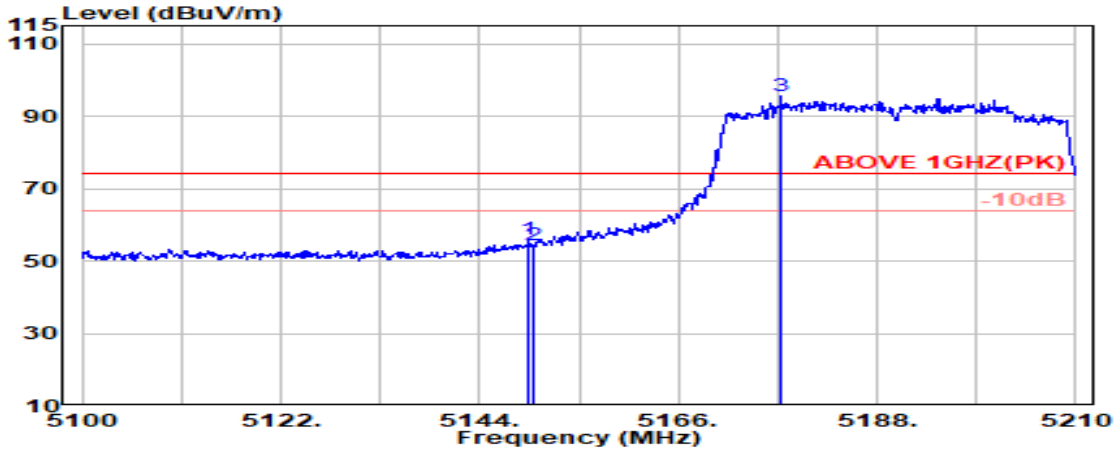

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.20	8.54	39.27	52.38	55.85	74.00	18.15	Peak
5150.000	34.20	8.54	39.27	50.88	54.35	74.00	19.65	Peak
@ 5177.330	34.25	8.56	39.27	91.97	95.52	---	---	Peak

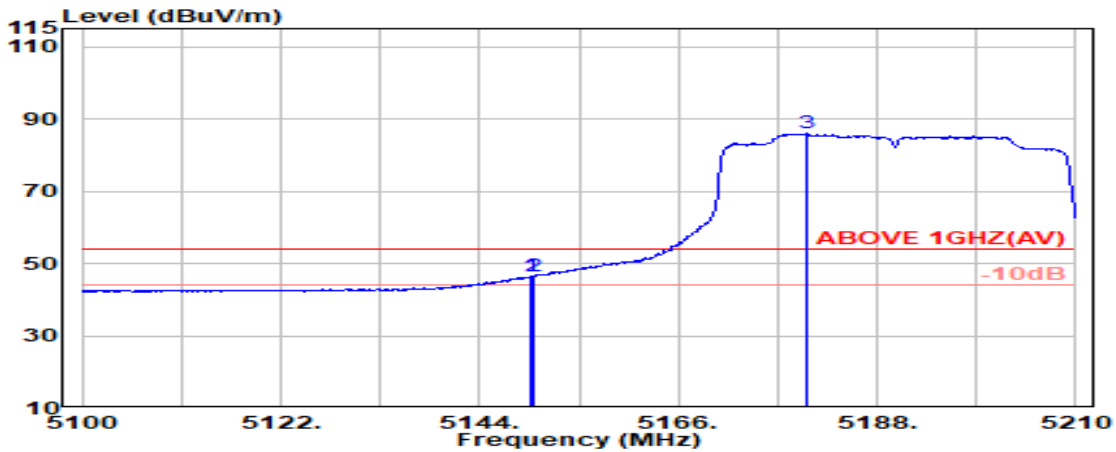


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.20	8.54	39.27	42.85	46.33	54.00	7.67	Average
5150.000	34.20	8.54	39.27	42.91	46.38	54.00	7.62	Average
@ 5180.300	34.26	8.56	39.27	82.37	85.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

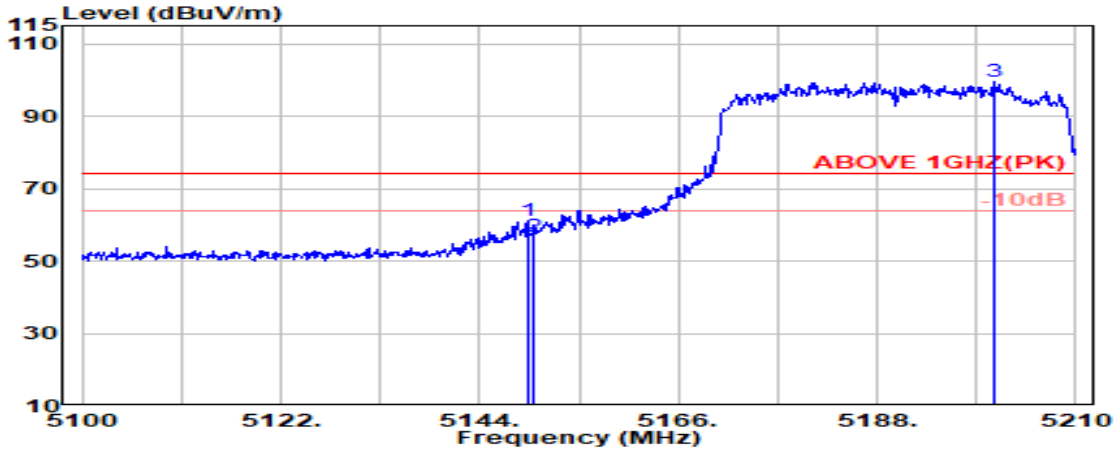

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.20	8.54	39.27	57.83	61.30	74.00	12.70	Peak
5150.000	34.20	8.54	39.27	53.34	56.81	74.00	17.19	Peak
@ 5201.090	34.30	8.58	39.27	96.09	99.70	---	---	Peak

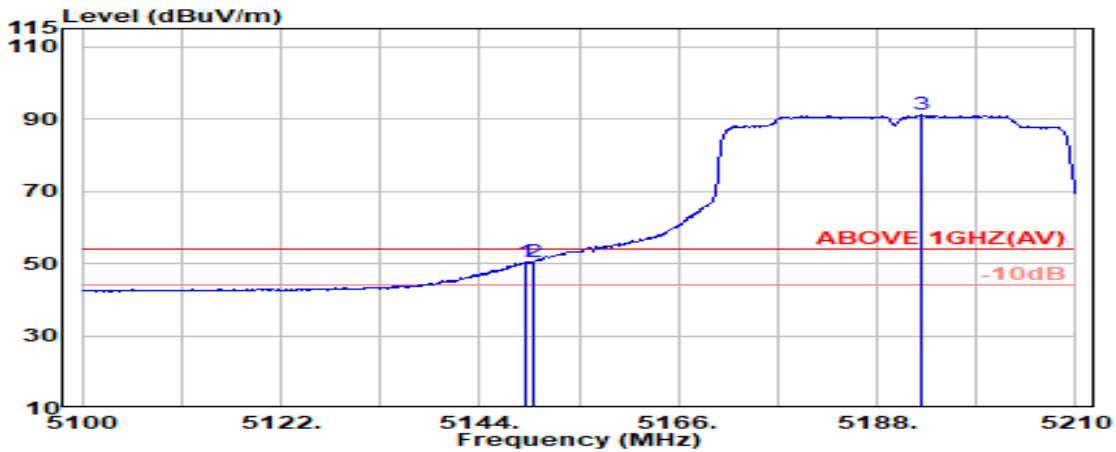


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.20	8.54	39.27	46.86	50.33	54.00	3.67	Average
5150.000	34.20	8.54	39.27	47.10	50.57	54.00	3.43	Average
@ 5192.840	34.29	8.57	39.27	87.45	91.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

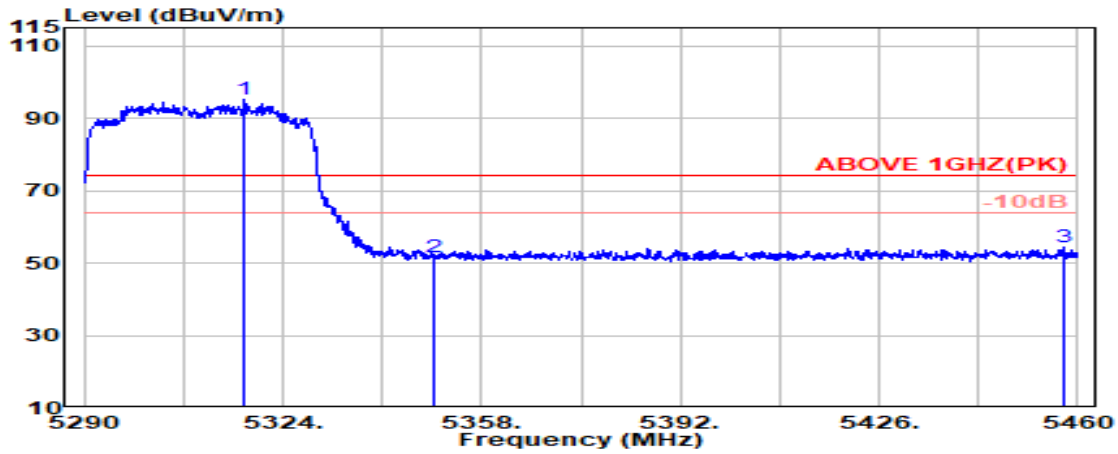

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.500	34.56	8.65	39.26	91.27	95.22	---	---	Peak
5350.000	34.50	8.67	39.26	47.89	51.80	74.00	22.20	Peak
5457.500	34.73	8.73	39.25	49.98	54.19	74.00	19.81	Peak

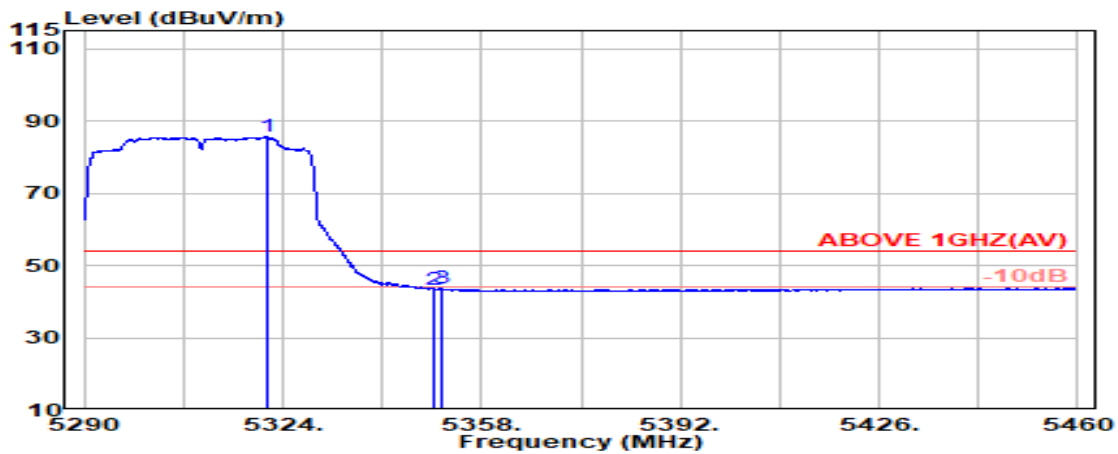


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	34.56	8.65	39.26	81.69	85.64	---	---	Average
5350.000	34.50	8.67	39.26	39.39	43.30	54.00	10.70	Average
5351.100	34.50	8.67	39.26	39.83	43.74	54.00	10.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

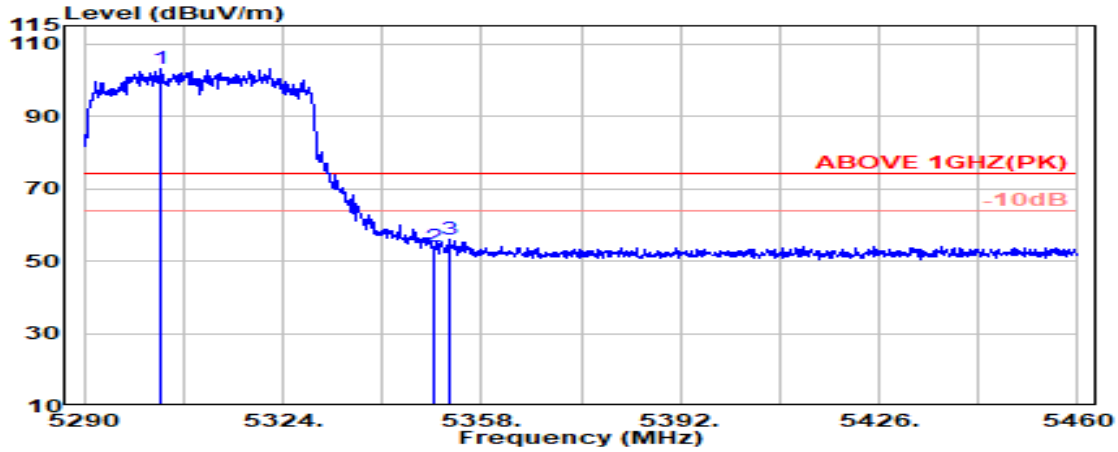

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.200	34.59	8.64	39.26	99.16	103.13	---	---	Peak
5350.000	34.50	8.67	39.26	49.94	53.84	74.00	20.16	Peak
5352.500	34.51	8.67	39.26	51.96	55.87	74.00	18.13	Peak

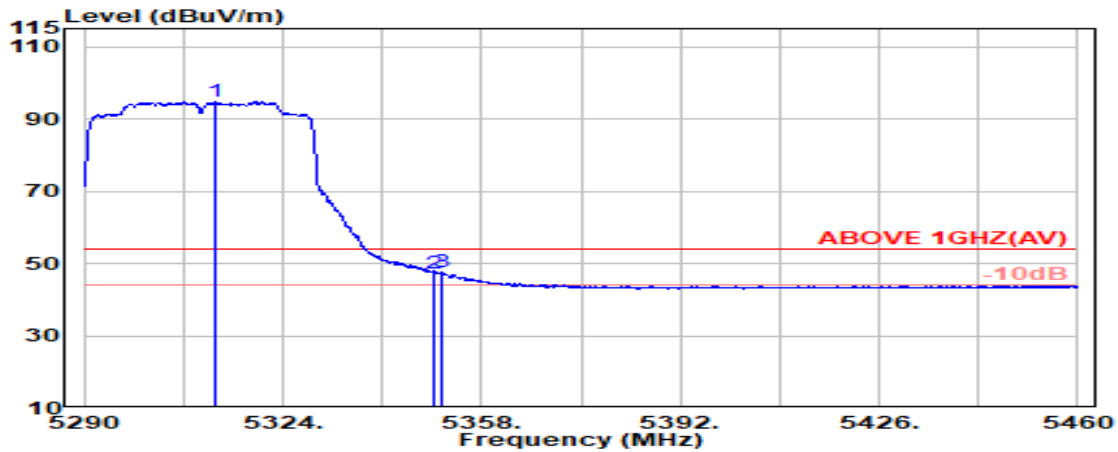


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.400	34.58	8.64	39.26	90.85	94.81	---	---	Average
5350.000	34.50	8.67	39.26	43.47	47.38	54.00	6.62	Average
5351.000	34.50	8.67	39.26	43.56	47.46	54.00	6.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

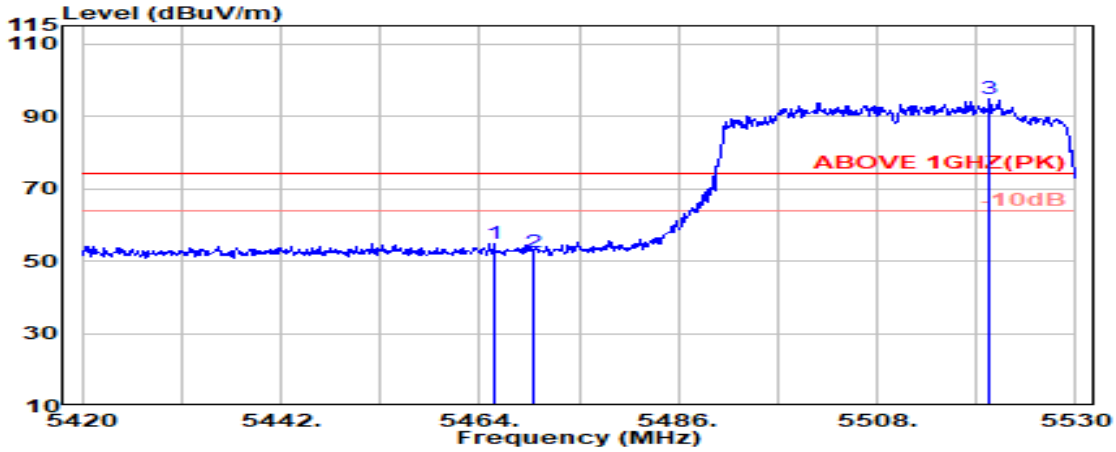

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.76	8.73	39.25	50.66	54.91	74.00	19.09	Peak
5470.000	34.78	8.74	39.25	48.30	52.56	74.00	21.44	Peak
@ 5520.400	34.86	8.76	39.25	90.38	94.75	---	---	Peak

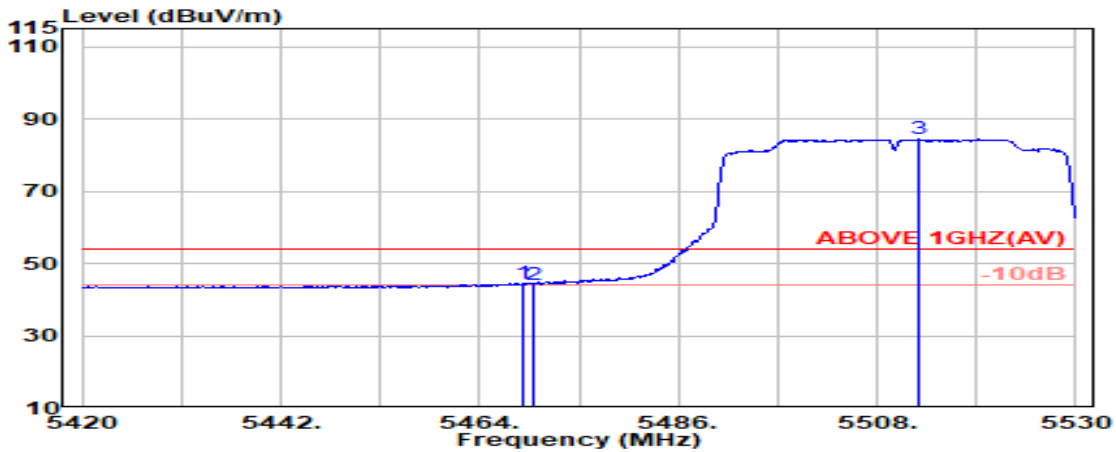


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.78	8.74	39.25	40.36	44.62	54.00	9.38	Average
5470.000	34.78	8.74	39.25	40.00	44.27	54.00	9.73	Average
@ 5512.700	34.87	8.76	39.25	80.07	84.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

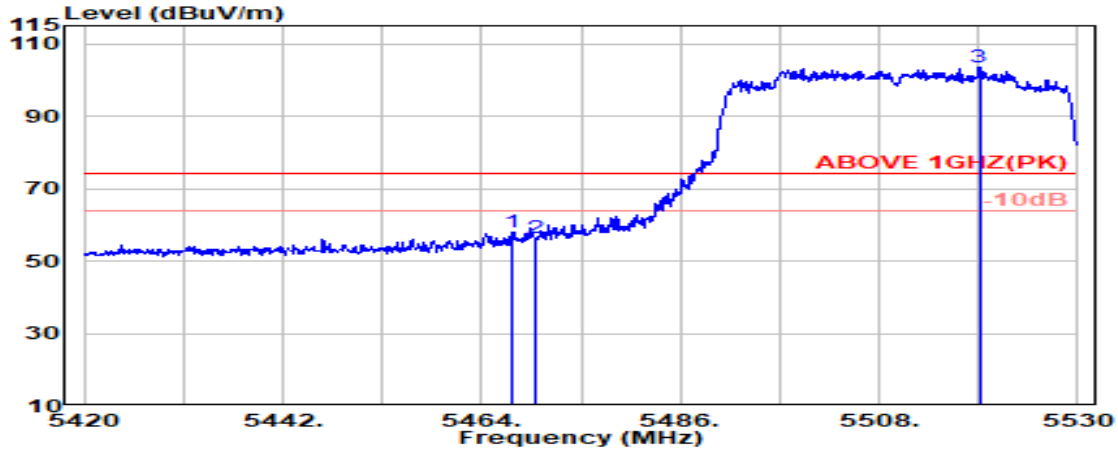

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.77	8.73	39.25	53.88	58.13	74.00	15.87	Peak
5470.000	34.78	8.74	39.25	52.21	56.47	74.00	17.53	Peak
@ 5519.100	34.86	8.76	39.25	99.17	103.54	---	---	Peak

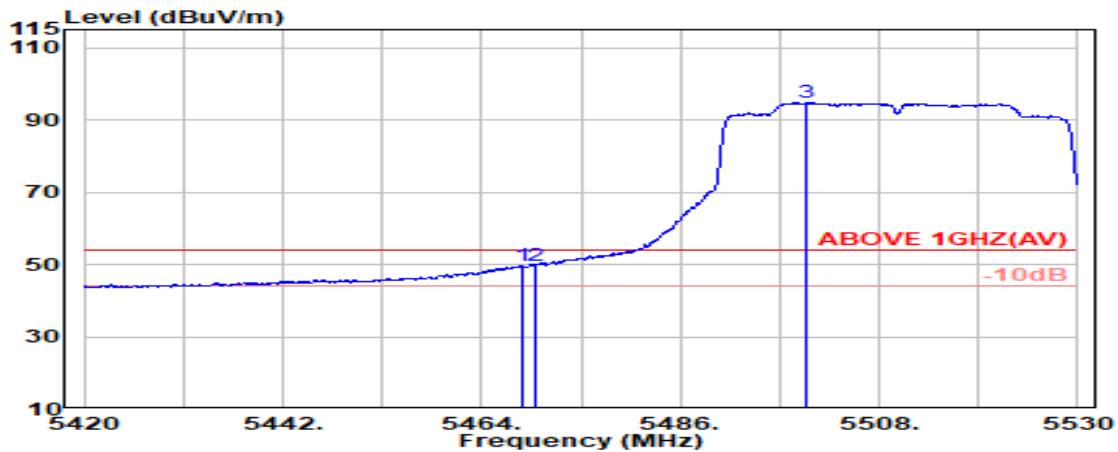


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.77	8.73	39.25	45.39	49.65	54.00	4.35	Average
5470.000	34.78	8.74	39.25	45.38	49.65	54.00	4.35	Average
@ 5500.000	34.90	8.75	39.25	90.51	94.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

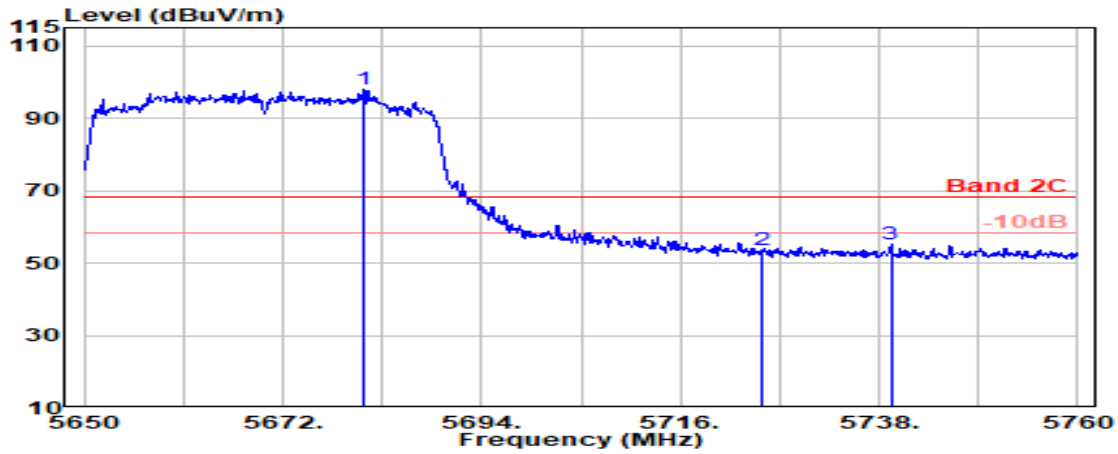

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.000	34.48	8.86	39.28	93.74	97.79	---	---	Peak
5725.000	34.45	8.88	39.29	49.61	53.65	68.20	14.55	Peak
5739.300	34.48	8.89	39.29	50.97	55.05	68.20	13.15	Peak

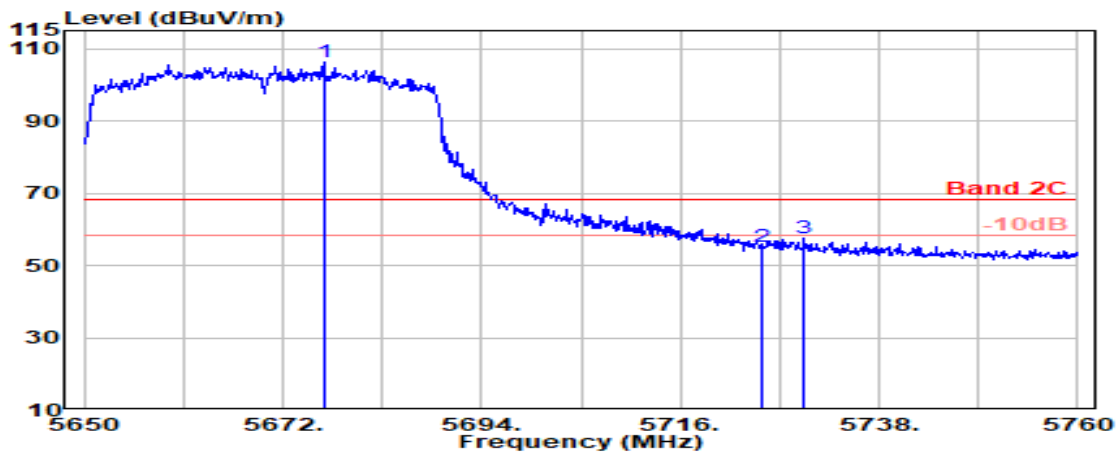


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.500	34.49	8.85	39.28	102.04	106.11	---	---	Peak
5725.000	34.45	8.88	39.29	51.09	55.13	68.20	13.07	Peak
5729.600	34.46	8.88	39.29	53.46	57.51	68.20	10.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

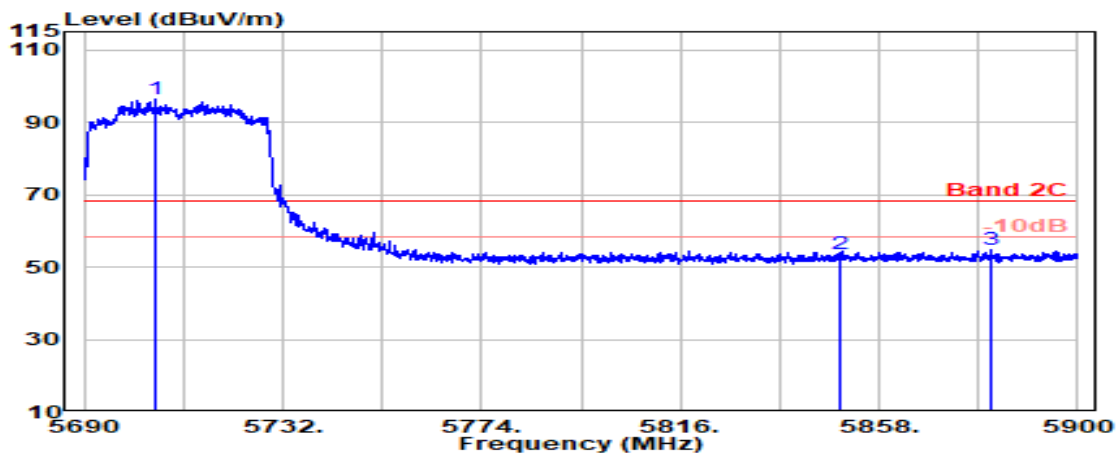

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.100	34.41	8.87	39.29	92.39	96.38	---	---	Peak
5850.000	34.70	8.95	39.31	49.30	53.63	68.20	14.57	Peak
5881.500	34.76	8.97	39.32	50.43	54.84	68.20	13.36	Peak

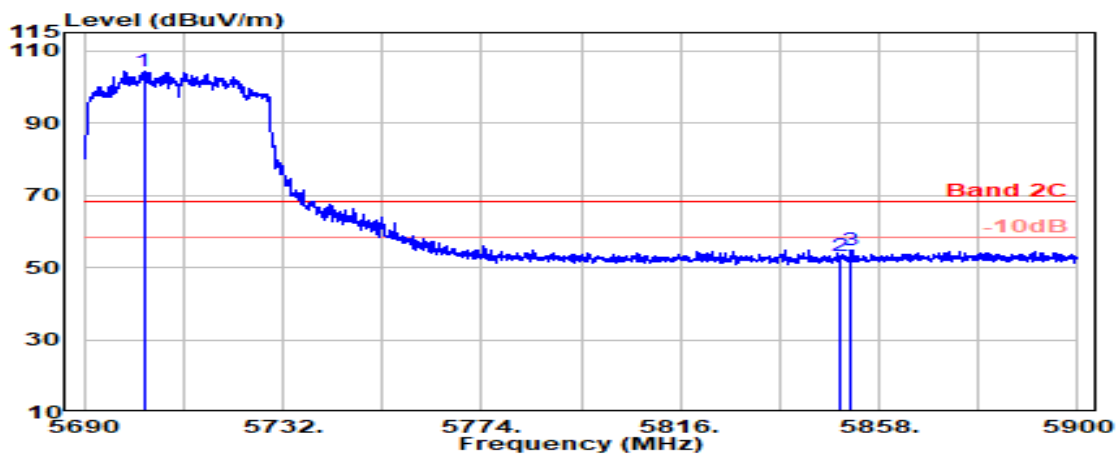


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.600	34.41	8.87	39.29	100.47	104.46	---	---	Peak
5850.000	34.70	8.95	39.31	49.05	53.38	68.20	14.82	Peak
5852.200	34.70	8.95	39.31	50.49	54.84	68.20	13.36	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

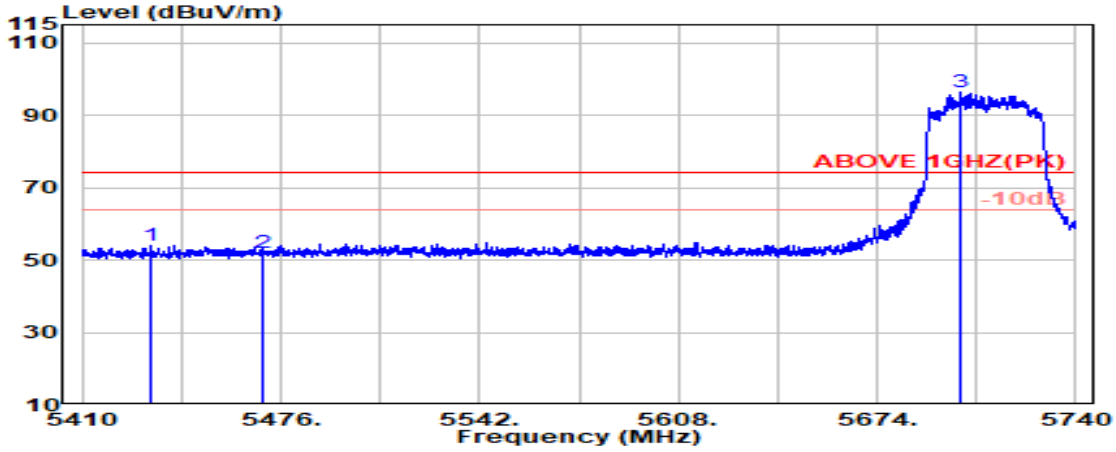

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.600	34.67	8.71	39.25	49.84	53.97	74.00	20.03	Peak
5470.000	34.78	8.74	39.25	47.70	51.96	74.00	22.04	Peak
@ 5701.900	34.40	8.87	39.29	92.52	96.51	---	---	Peak

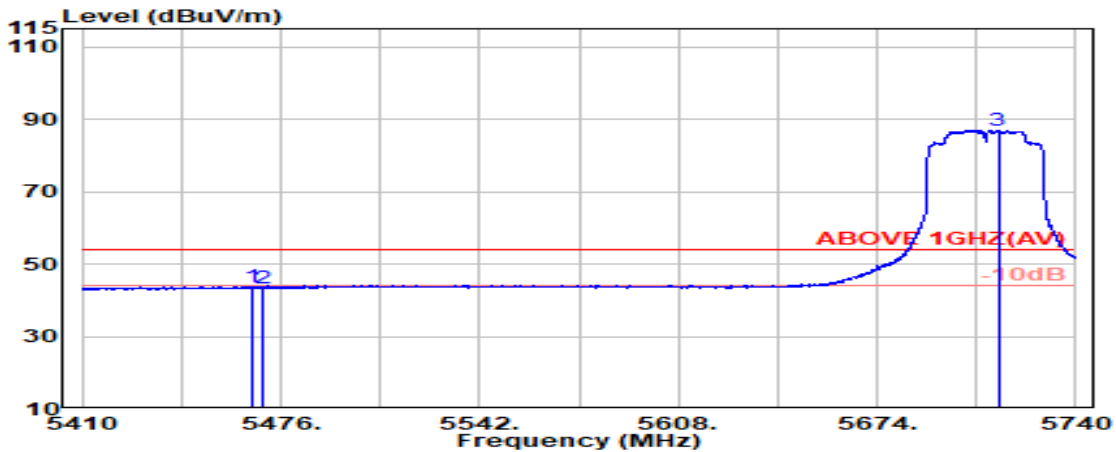


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.77	8.73	39.25	39.50	43.74	54.00	10.26	Peak
5470.000	34.78	8.74	39.25	39.17	43.43	54.00	10.57	Peak
@ 5714.200	34.43	8.87	39.29	82.97	86.98	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

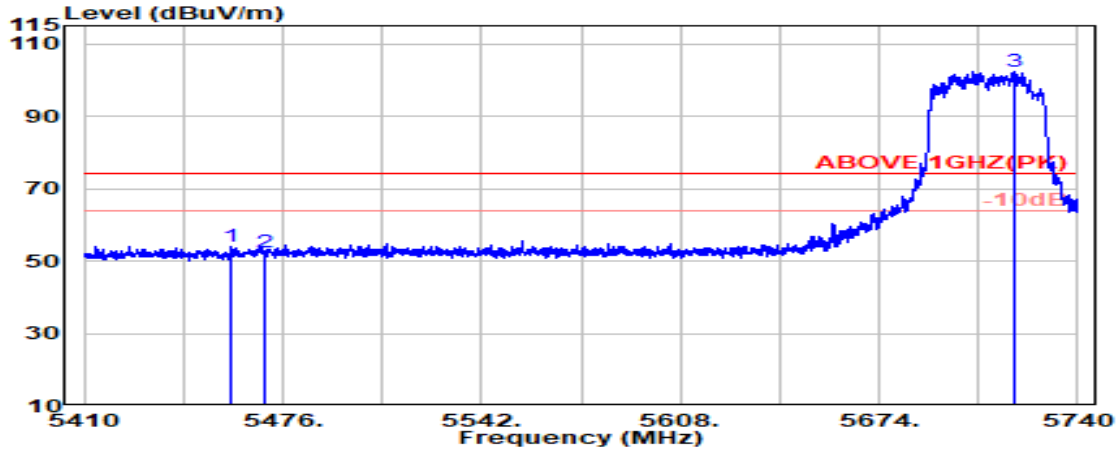

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.700	34.73	8.73	39.25	49.87	54.08	74.00	19.92	Peak
5470.000	34.78	8.74	39.25	48.18	52.45	74.00	21.55	Peak
@ 5719.000	34.44	8.88	39.29	98.45	102.48	---	---	Peak

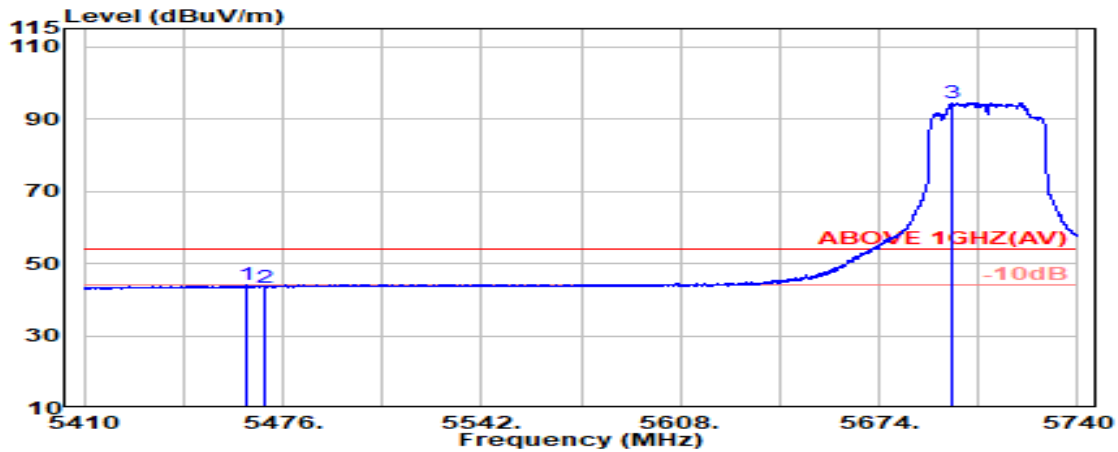


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.76	8.73	39.25	39.73	43.97	54.00	10.03	Peak
5470.000	34.78	8.74	39.25	39.22	43.48	54.00	10.52	Peak
@ 5698.300	34.41	8.87	39.29	90.45	94.44	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

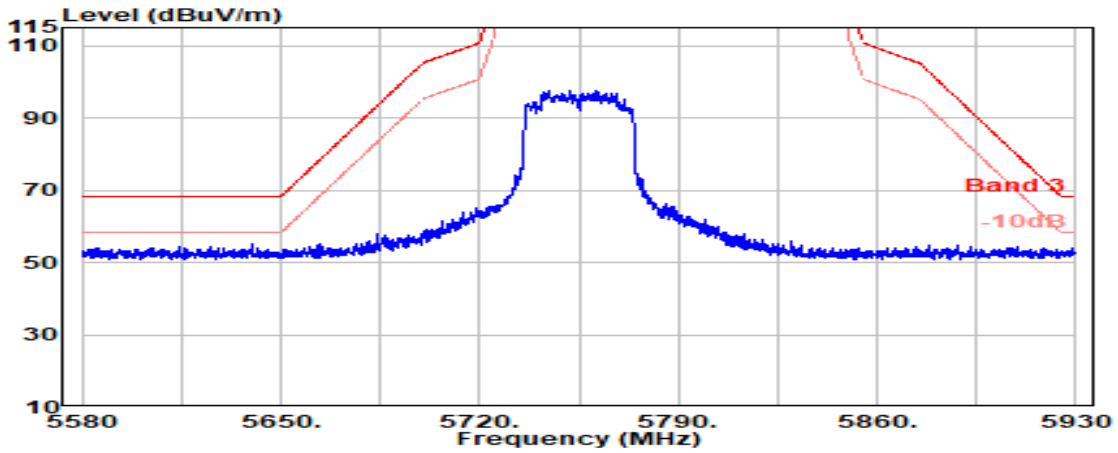


Antenna at Vertical Polarization

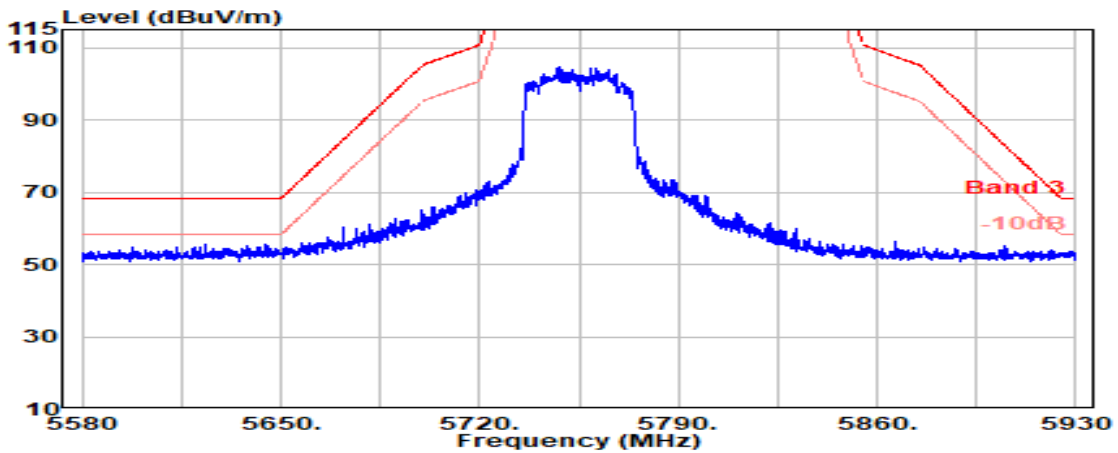


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

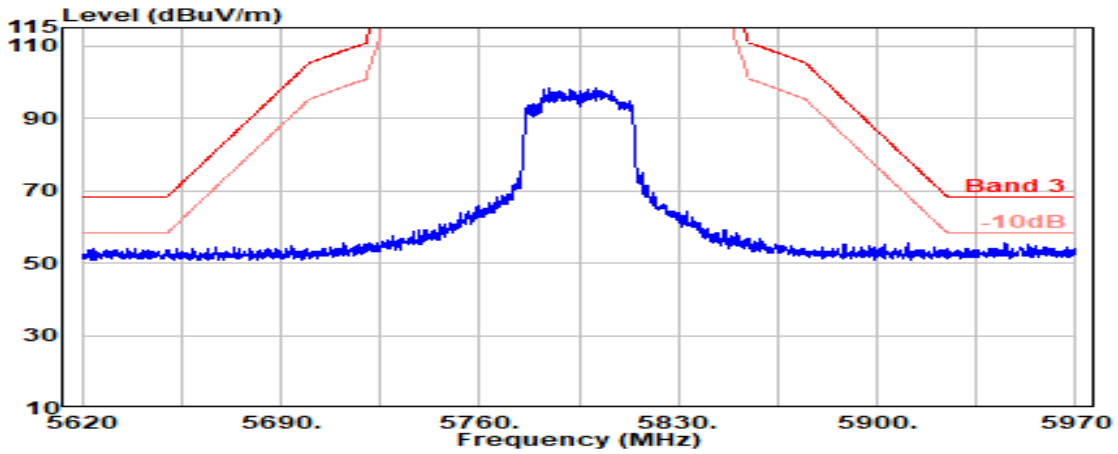

Antenna at Vertical Polarization

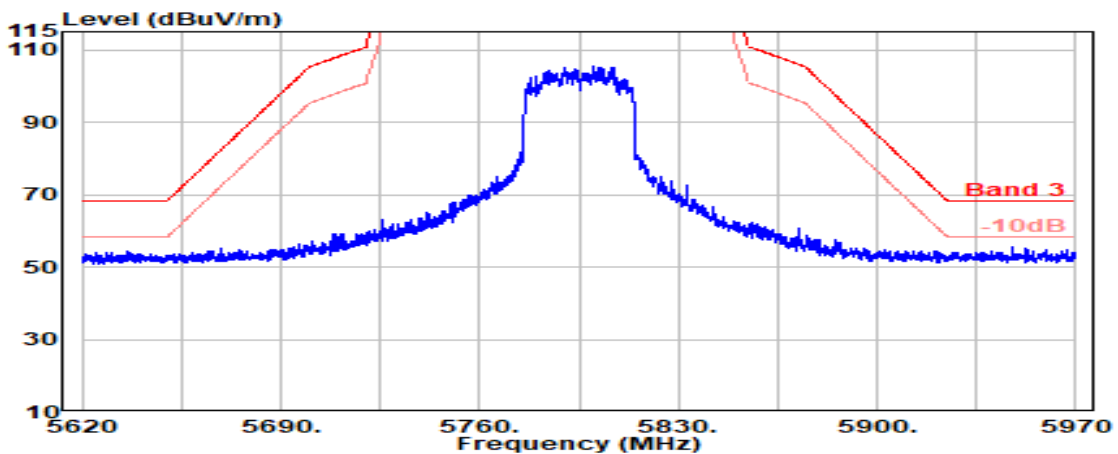


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

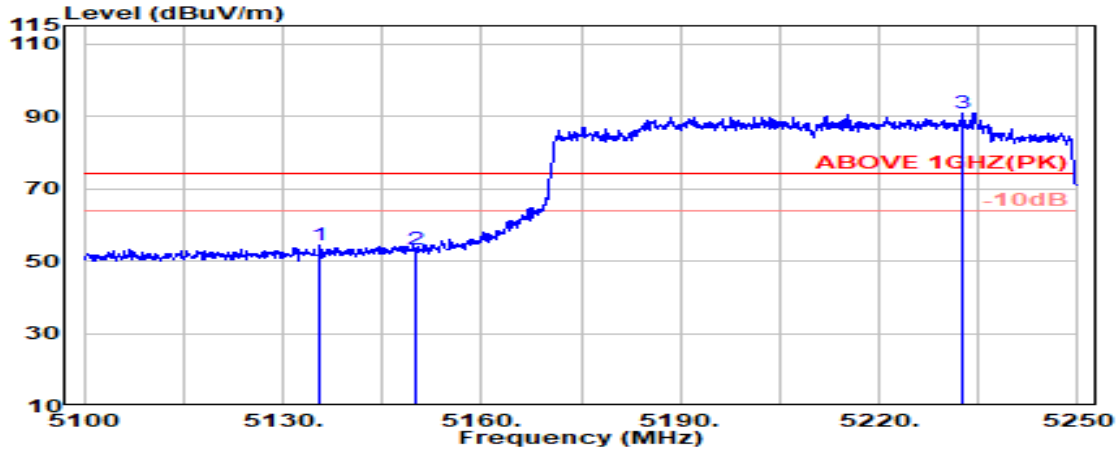

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.600	34.14	8.54	39.27	50.85	54.26	74.00	19.74	Peak
5150.000	34.20	8.54	39.27	49.75	53.22	74.00	20.78	Peak
@ 5232.500	34.37	8.59	39.27	87.19	90.88	---	---	Peak

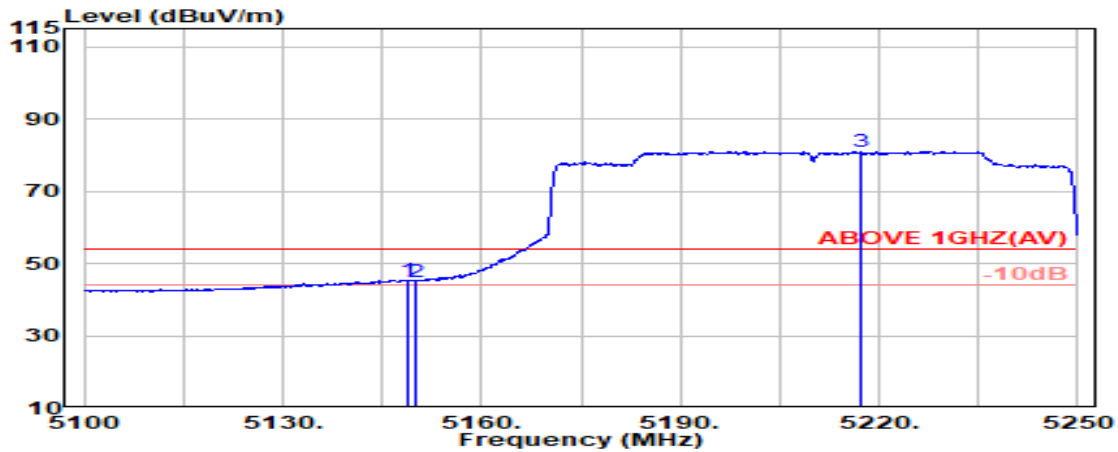


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.20	8.54	39.27	41.95	45.42	54.00	8.58	Average
5150.000	34.20	8.54	39.27	41.57	45.05	54.00	8.95	Average
@ 5217.300	34.33	8.59	39.27	77.33	80.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

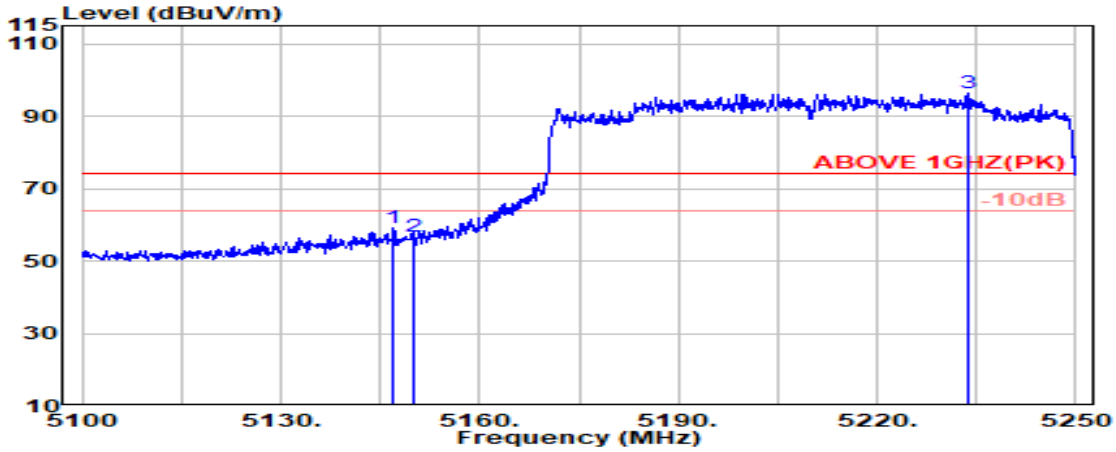

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.19	8.54	39.27	55.68	59.14	74.00	14.86	Peak
5150.000	34.20	8.54	39.27	53.31	56.78	74.00	17.22	Peak
@ 5233.600	34.37	8.60	39.27	92.65	96.35	---	---	Peak

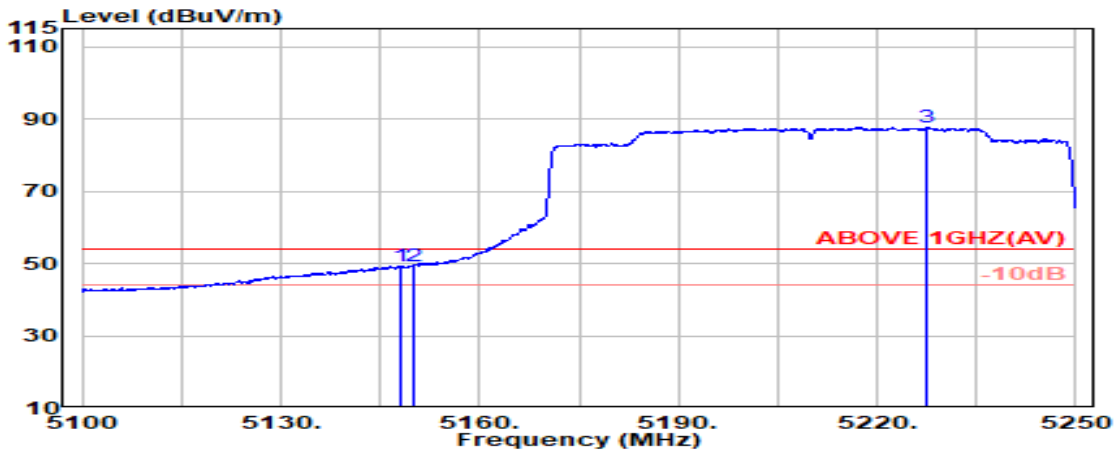


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	34.19	8.54	39.27	45.88	49.34	54.00	4.66	Average
5150.000	34.20	8.54	39.27	45.94	49.41	54.00	4.59	Average
@ 5227.400	34.35	8.59	39.27	84.04	87.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

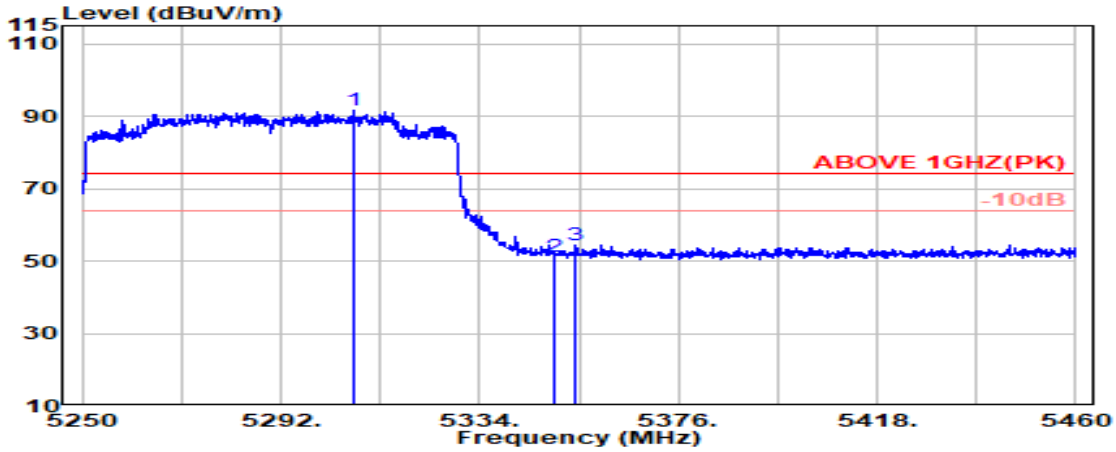

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.300	34.59	8.64	39.26	87.77	91.74	---	---	Peak
5350.000	34.50	8.67	39.26	47.22	51.13	74.00	22.87	Peak
5354.400	34.51	8.67	39.26	50.44	54.36	74.00	19.64	Peak

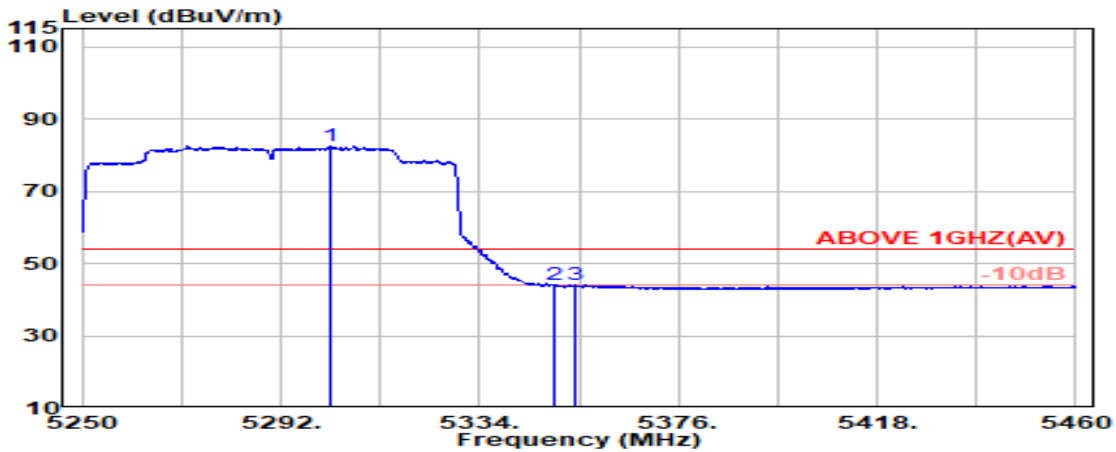


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.300	34.60	8.64	39.26	78.56	82.54	---	---	Average
5350.000	34.50	8.67	39.26	39.99	43.90	54.00	10.10	Average
5354.000	34.51	8.67	39.26	40.19	44.11	54.00	9.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

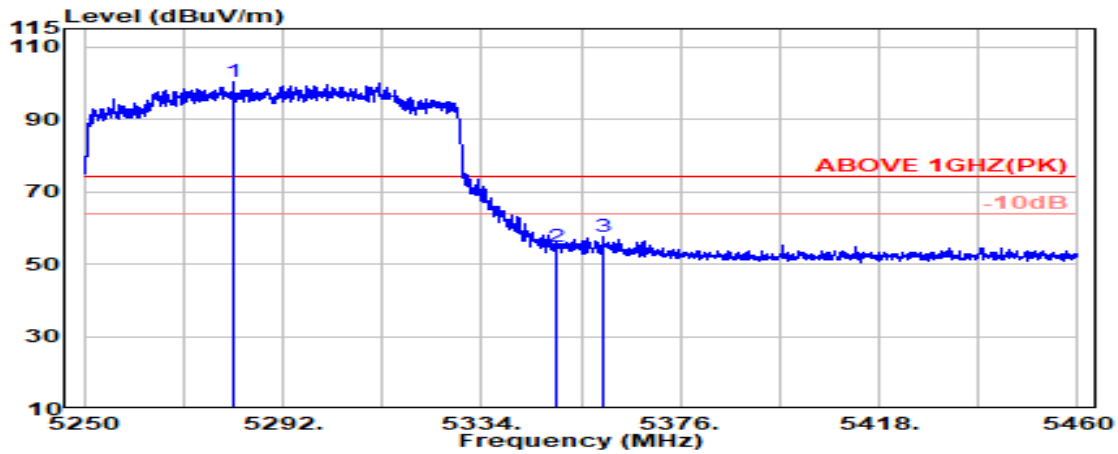

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.400	34.53	8.62	39.26	96.37	100.26	---	---	Peak
5350.000	34.50	8.67	39.26	51.06	54.96	74.00	19.04	Peak
5359.800	34.52	8.67	39.26	53.67	57.61	74.00	16.39	Peak

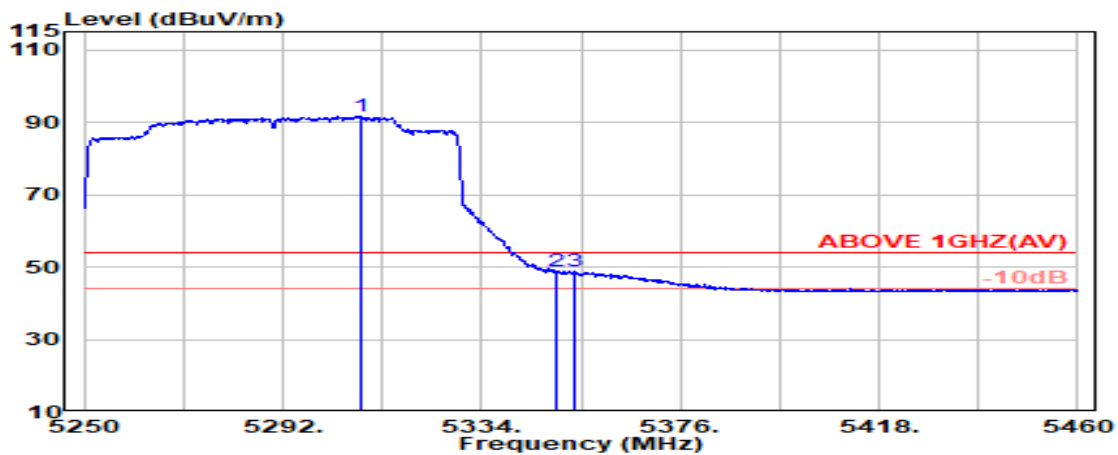


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.600	34.58	8.64	39.26	87.81	91.77	---	---	Average
5350.000	34.50	8.67	39.26	44.76	48.67	54.00	5.33	Average
5353.700	34.51	8.67	39.26	45.02	48.93	54.00	5.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

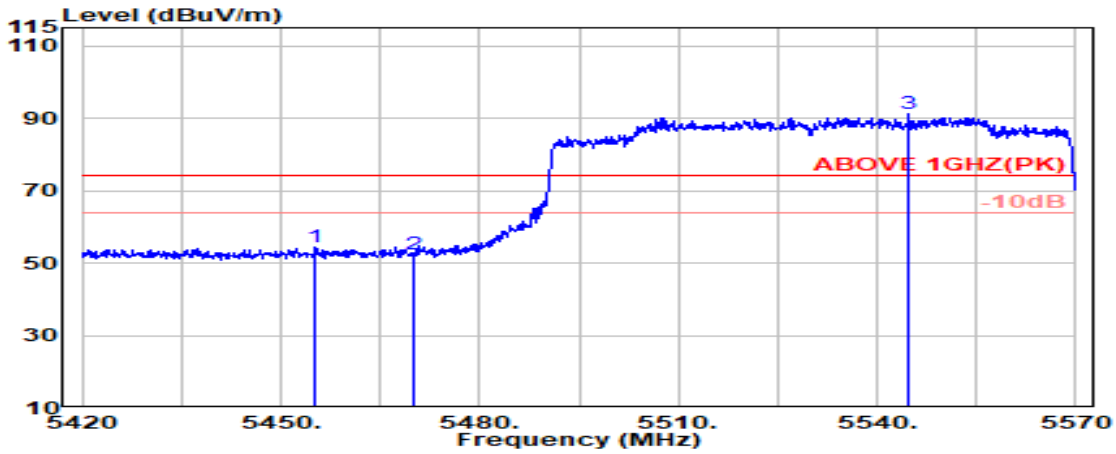

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.200	34.72	8.73	39.25	50.15	54.35	74.00	19.65	Peak
5470.000	34.78	8.74	39.25	48.25	52.52	74.00	21.48	Peak
@ 5544.800	34.81	8.78	39.26	86.85	91.19	---	---	Peak

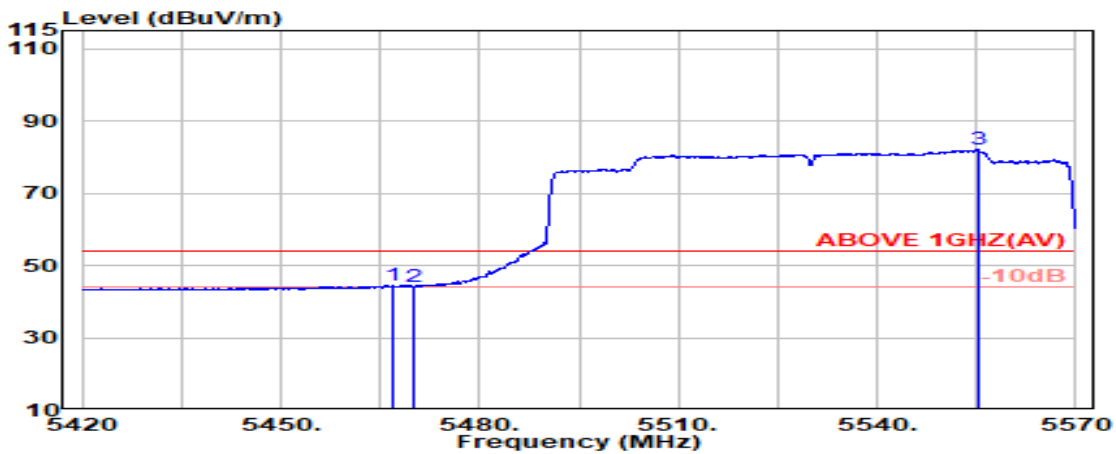


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.77	8.73	39.25	40.22	44.47	54.00	9.53	Average
5470.000	34.78	8.74	39.25	39.82	44.08	54.00	9.92	Average
@ 5555.200	34.79	8.78	39.26	77.68	82.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

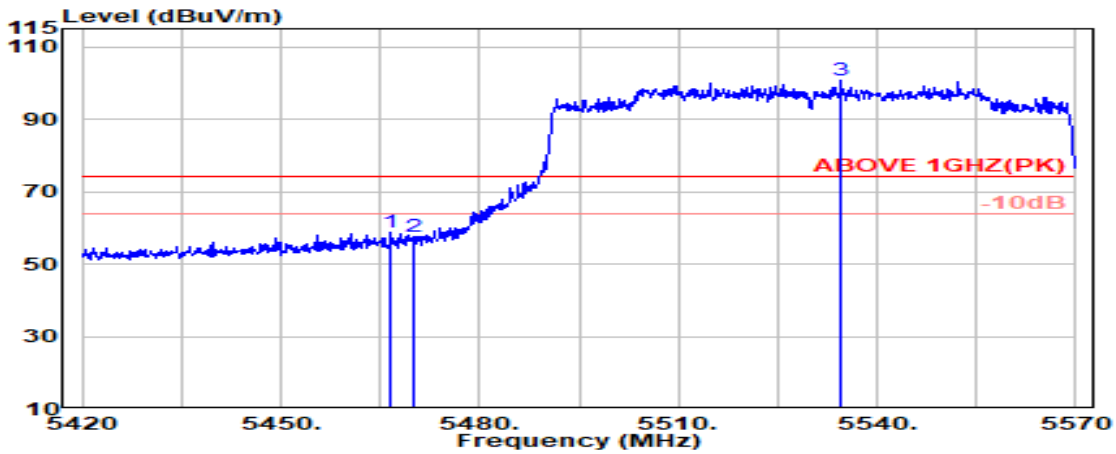

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.77	8.73	39.25	54.68	58.93	74.00	15.07	Peak
5470.000	34.78	8.74	39.25	53.18	57.45	74.00	16.55	Peak
@ 5534.500	34.83	8.77	39.26	96.52	100.87	---	---	Peak

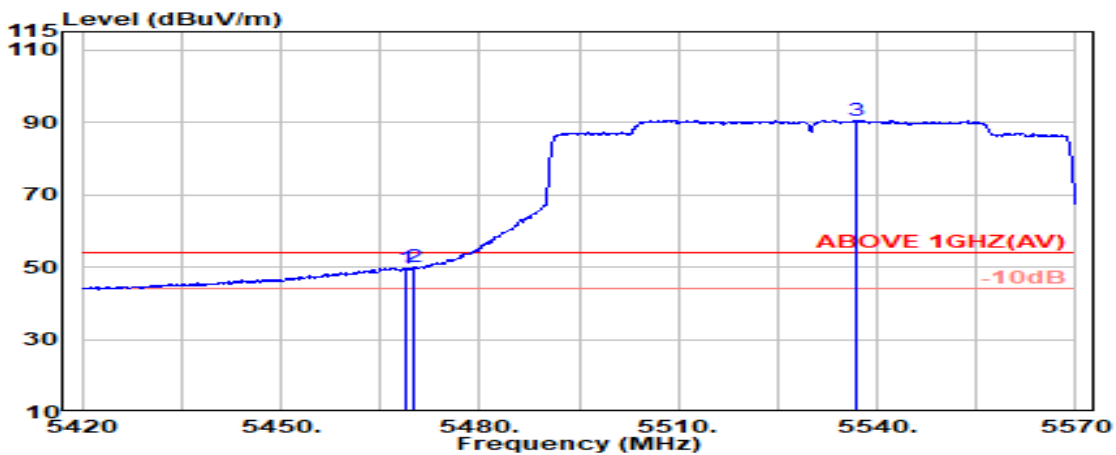


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.78	8.74	39.25	45.47	49.73	54.00	4.27	Average
5470.000	34.78	8.74	39.25	45.62	49.88	54.00	4.12	Average
@ 5536.900	34.83	8.77	39.26	86.27	90.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

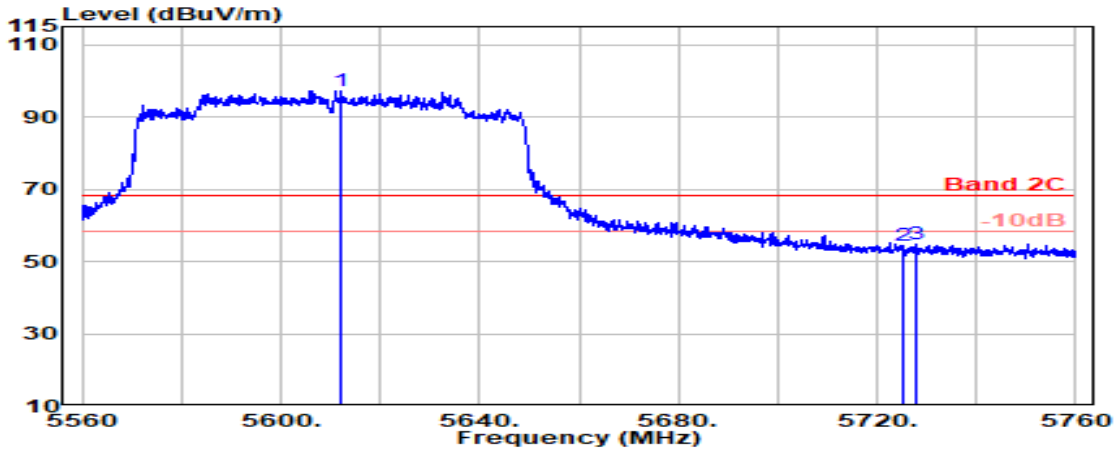

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.200	34.68	8.82	39.27	92.97	97.19	---	---	Peak
5725.000	34.45	8.88	39.29	50.17	54.21	68.20	13.99	Peak
5727.900	34.46	8.88	39.29	50.76	54.81	68.20	13.39	Peak

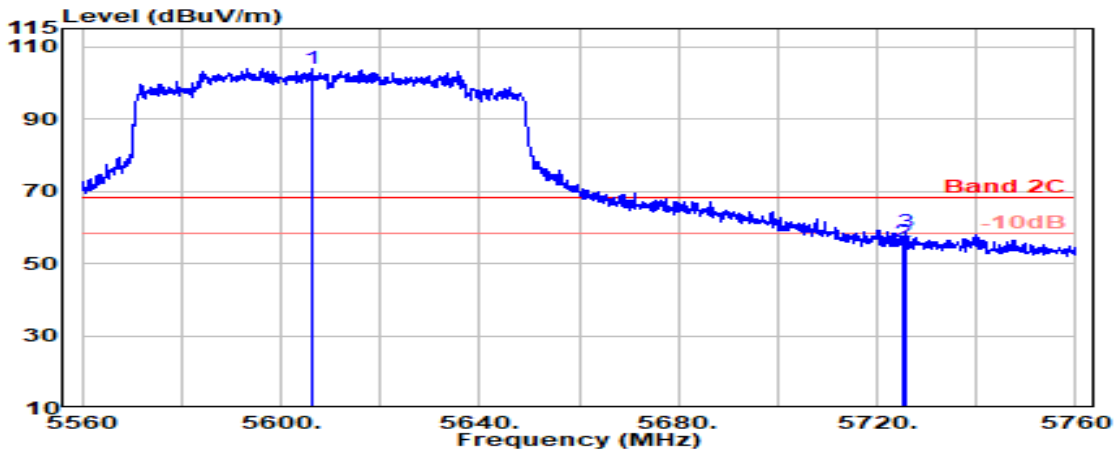


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.100	34.69	8.81	39.27	99.82	104.05	---	---	Peak
5725.000	34.45	8.88	39.29	51.88	55.92	68.20	12.28	Peak
5725.700	34.45	8.88	39.29	54.51	58.55	68.20	9.65	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

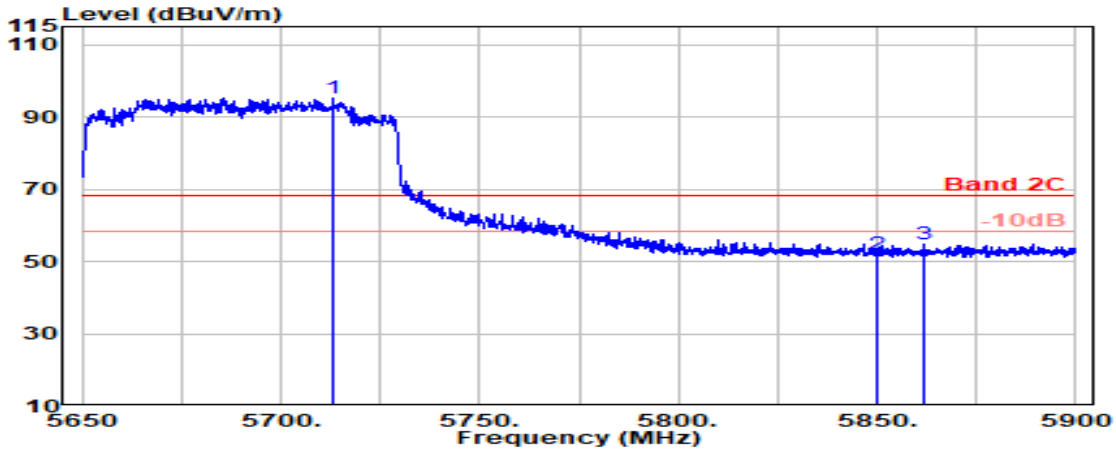

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.000	34.43	8.87	39.29	91.22	95.23	---	---	Peak
5850.000	34.70	8.95	39.31	47.78	52.11	68.20	16.09	Peak
5862.100	34.72	8.96	39.32	50.35	54.72	68.20	13.48	Peak

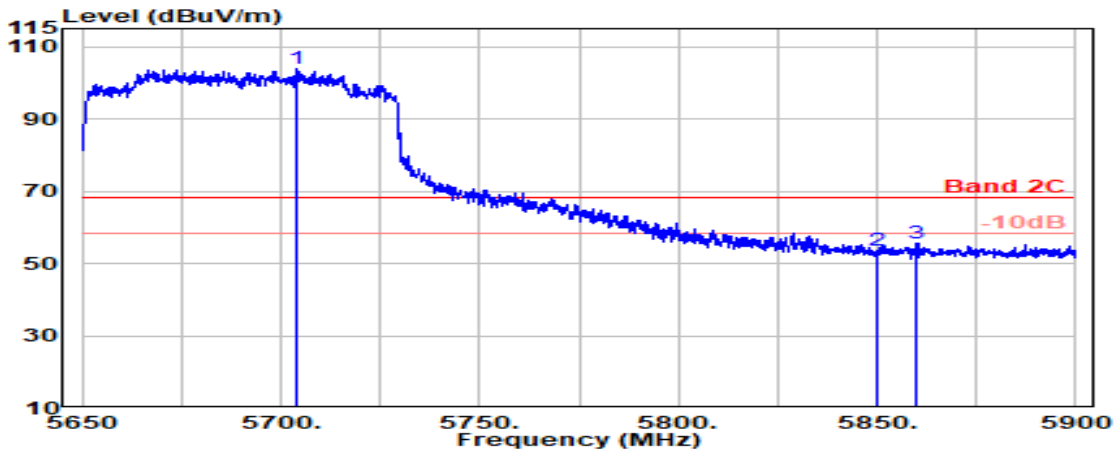


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.200	34.41	8.87	39.29	99.75	103.74	---	---	Peak
5850.000	34.70	8.95	39.31	49.17	53.51	68.20	14.69	Peak
5860.100	34.72	8.95	39.32	51.13	55.49	68.20	12.71	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

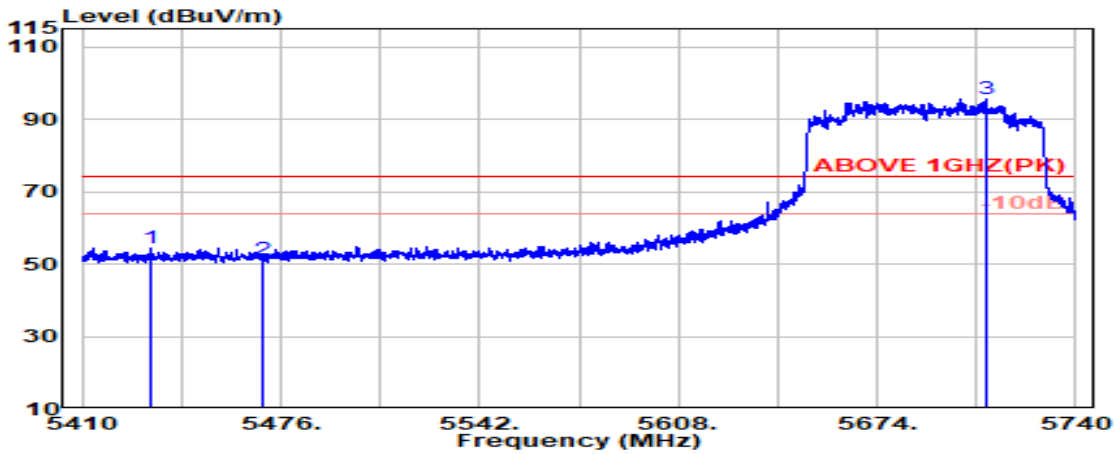

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.800	34.67	8.71	39.25	50.35	54.47	74.00	19.53	Peak
5470.000	34.78	8.74	39.25	46.90	51.17	74.00	22.83	Peak
@ 5710.400	34.42	8.87	39.29	91.52	95.53	---	---	Peak

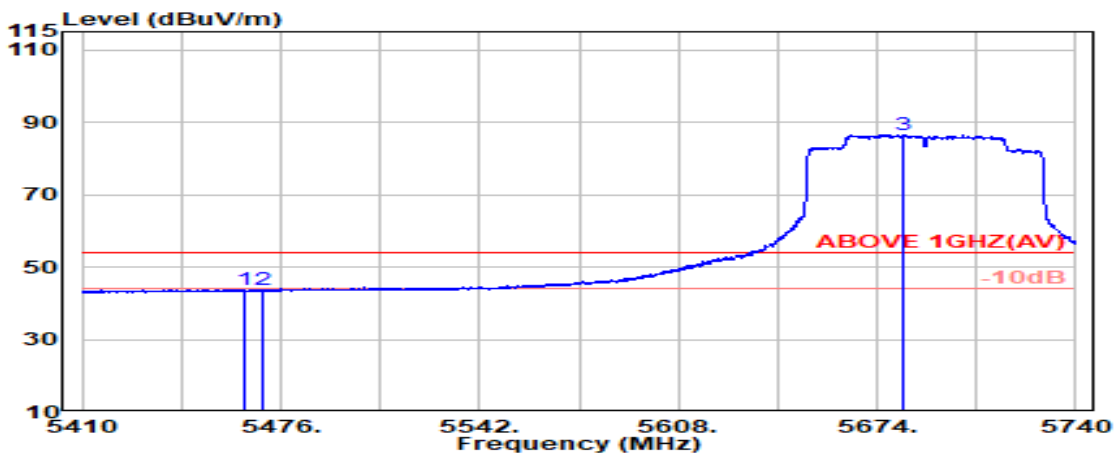


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.76	8.73	39.25	39.53	43.76	74.00	30.24	Peak
5470.000	34.78	8.74	39.25	39.22	43.49	74.00	30.51	Peak
@ 5683.000	34.47	8.86	39.28	82.53	86.57	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

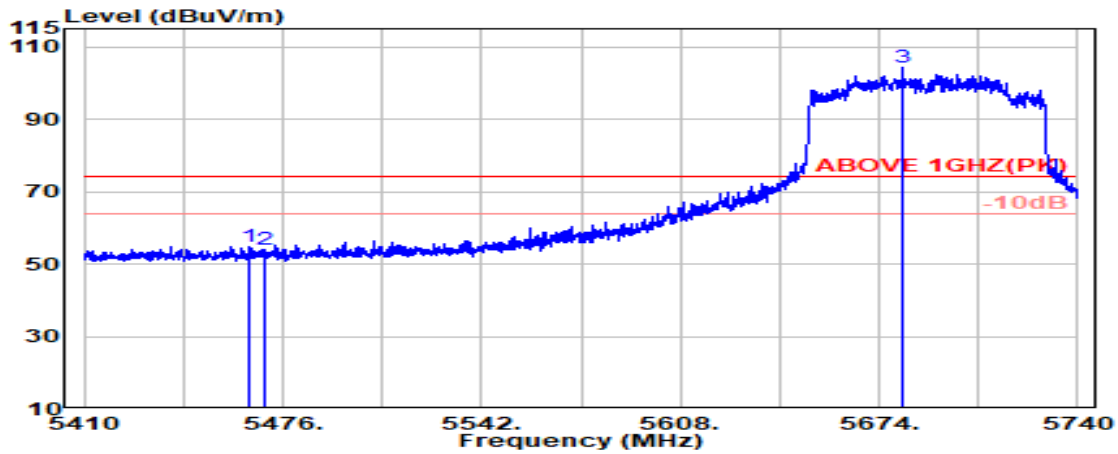

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.76	8.73	39.25	50.55	54.80	74.00	19.20	Peak
5470.000	34.78	8.74	39.25	49.53	53.79	74.00	20.21	Peak
@ 5681.800	34.47	8.86	39.28	100.30	104.34	---	---	Peak

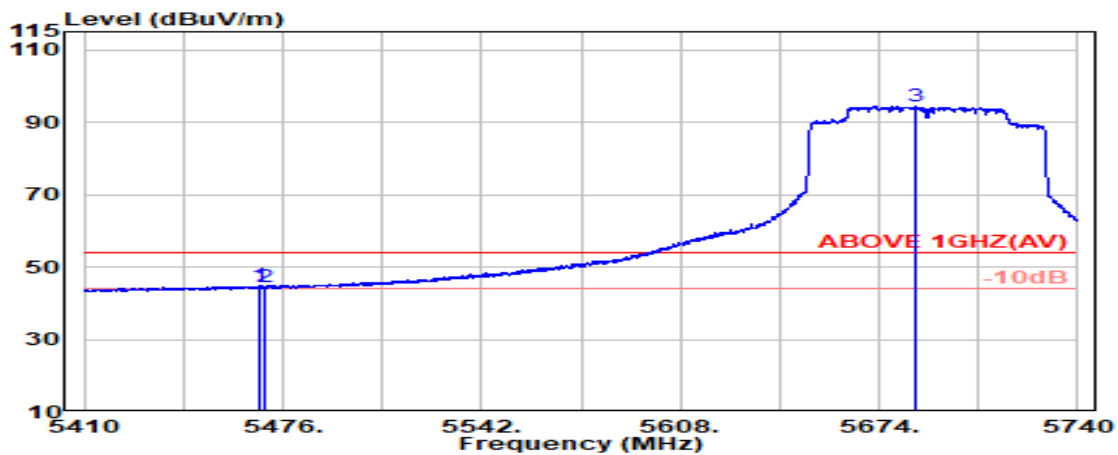


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.77	8.73	39.25	40.50	44.75	54.00	9.25	Average
5470.000	34.78	8.74	39.25	40.18	44.45	54.00	9.55	Average
@ 5686.100	34.46	8.86	39.28	90.49	94.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

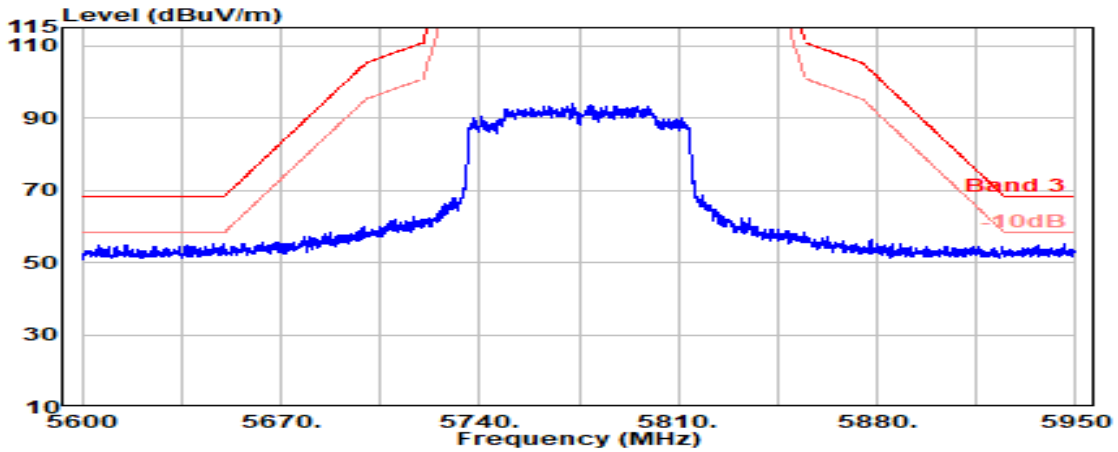

Antenna at Vertical Polarization

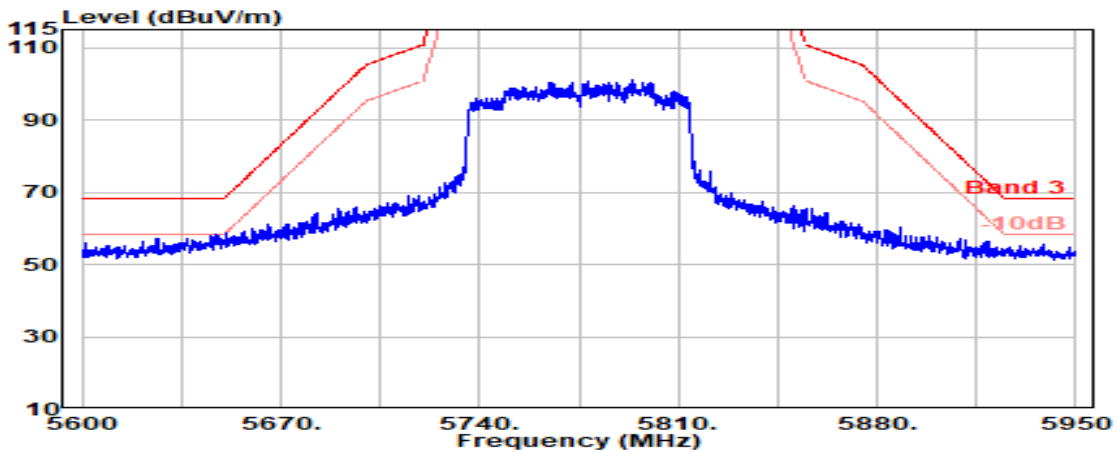


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

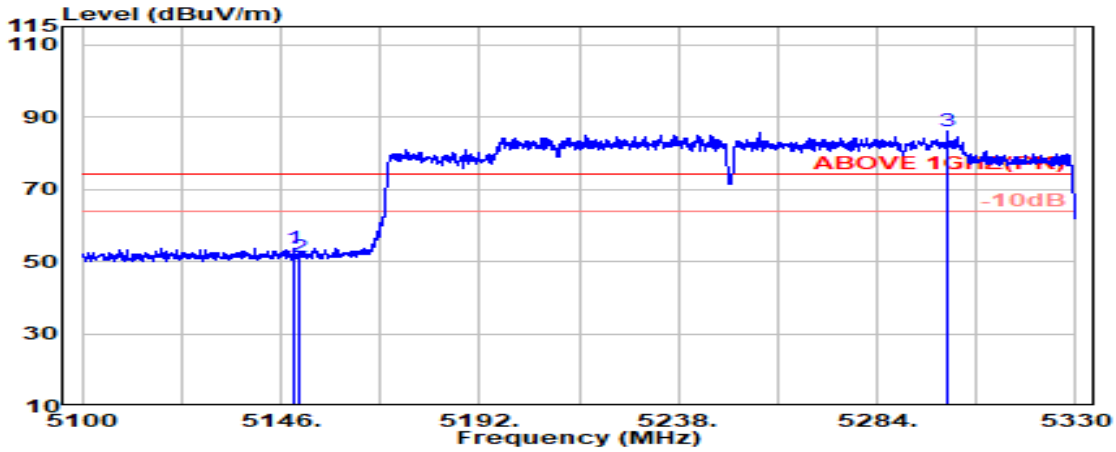

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.20	8.54	39.27	50.11	53.58	74.00	20.42	Peak
5150.000	34.20	8.54	39.27	47.92	51.39	74.00	22.61	Peak
@ 5300.200	34.60	8.64	39.26	82.00	85.97	---	---	Peak

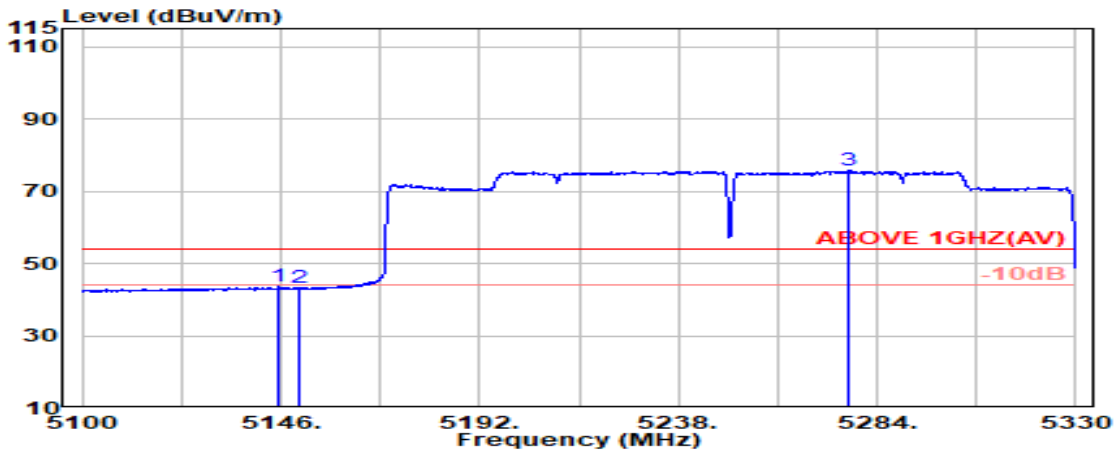


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	34.18	8.54	39.27	40.07	43.52	54.00	10.48	Average
5150.000	34.20	8.54	39.27	39.77	43.25	54.00	10.75	Average
@ 5277.500	34.51	8.62	39.26	71.75	75.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

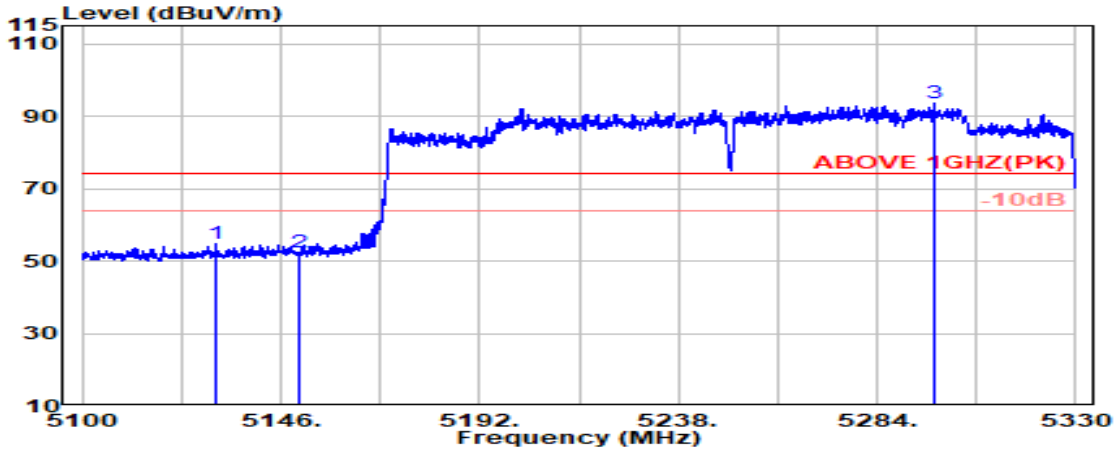

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.000	34.12	8.53	39.27	51.41	54.80	74.00	19.20	Peak
5150.000	34.20	8.54	39.27	48.99	52.46	74.00	21.54	Peak
@ 5297.000	34.59	8.63	39.26	89.65	93.61	---	---	Peak

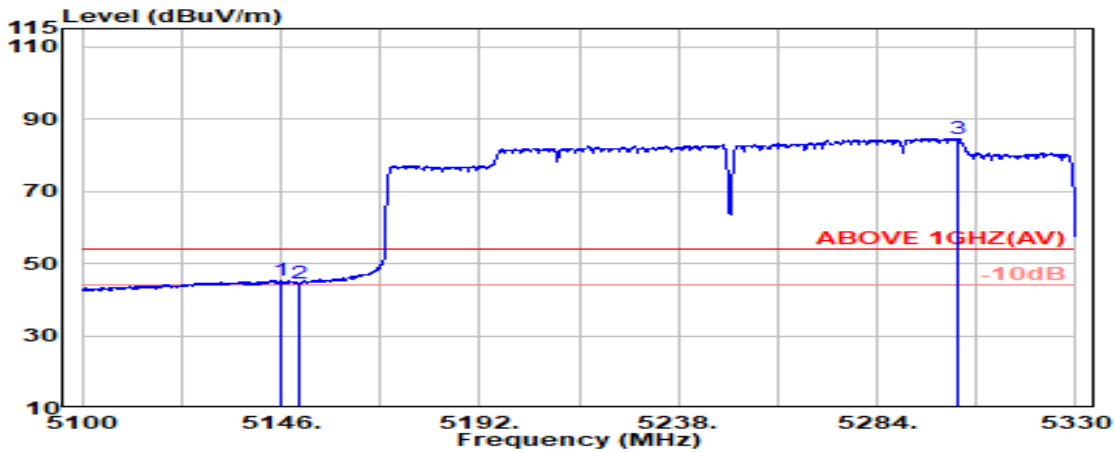


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	34.19	8.54	39.27	41.98	45.44	54.00	8.56	Average
5150.000	34.20	8.54	39.27	41.04	44.51	54.00	9.49	Average
@ 5302.700	34.59	8.64	39.26	80.65	84.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

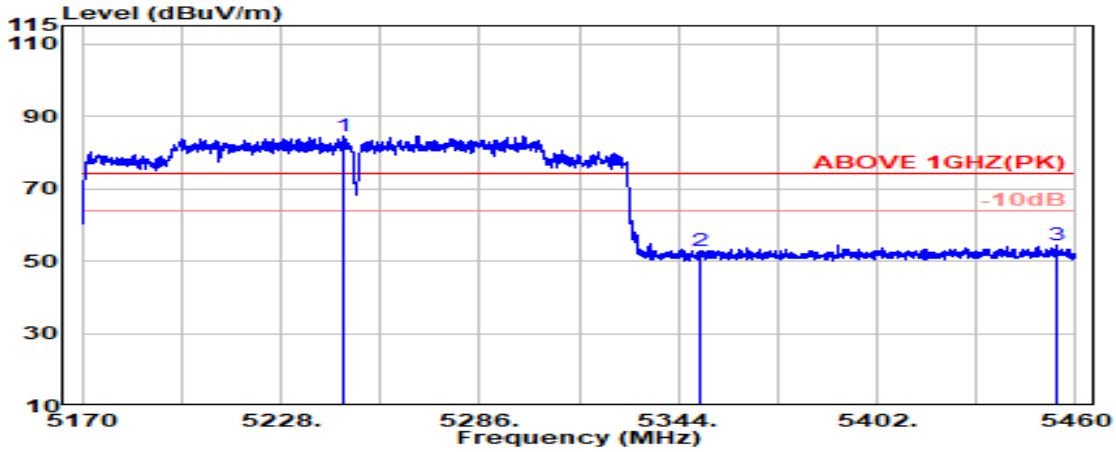

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5246.000	34.39	8.60	39.26	80.94	84.67	---	---	Peak
5350.000	34.50	8.67	39.26	48.75	52.66	74.00	21.34	Peak
5454.200	34.72	8.73	39.25	50.17	54.36	74.00	19.64	Peak

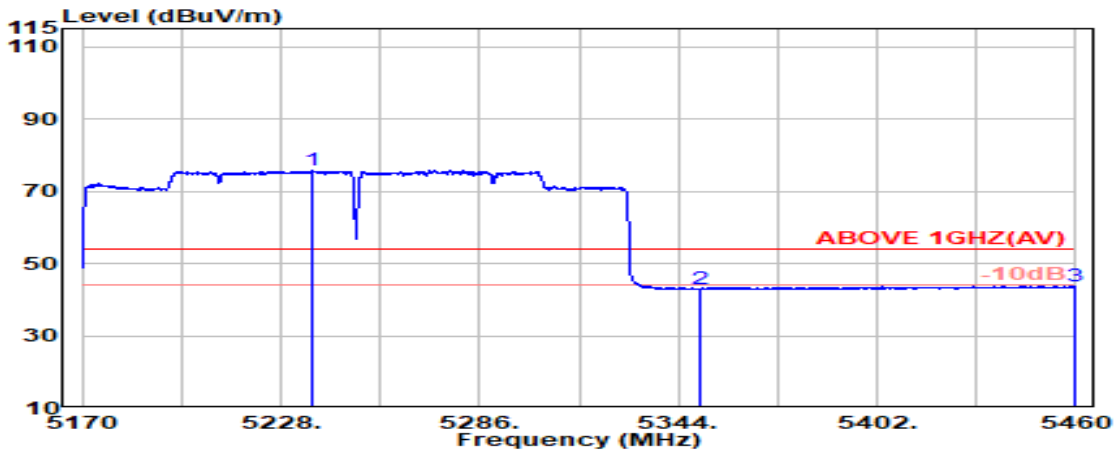


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5237.400	34.37	8.60	39.27	72.03	75.73	---	---	Average
5350.000	34.50	8.67	39.26	38.97	42.88	54.00	11.12	Average
5459.900	34.74	8.73	39.25	39.63	43.85	54.00	10.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

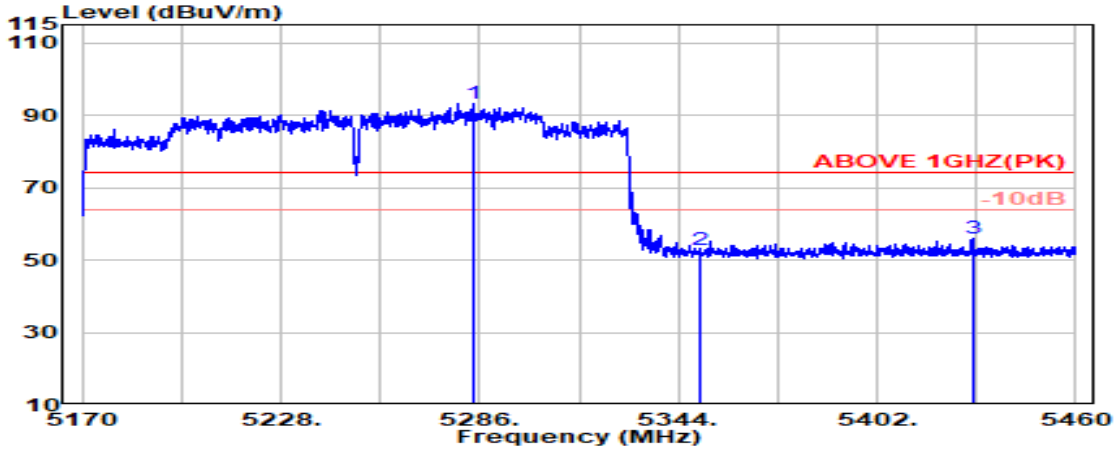

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.300	34.54	8.63	39.26	89.34	93.24	---	---	Peak
5350.000	34.50	8.67	39.26	48.87	52.78	74.00	21.22	Peak
5429.800	34.66	8.71	39.25	51.90	56.02	74.00	17.98	Peak

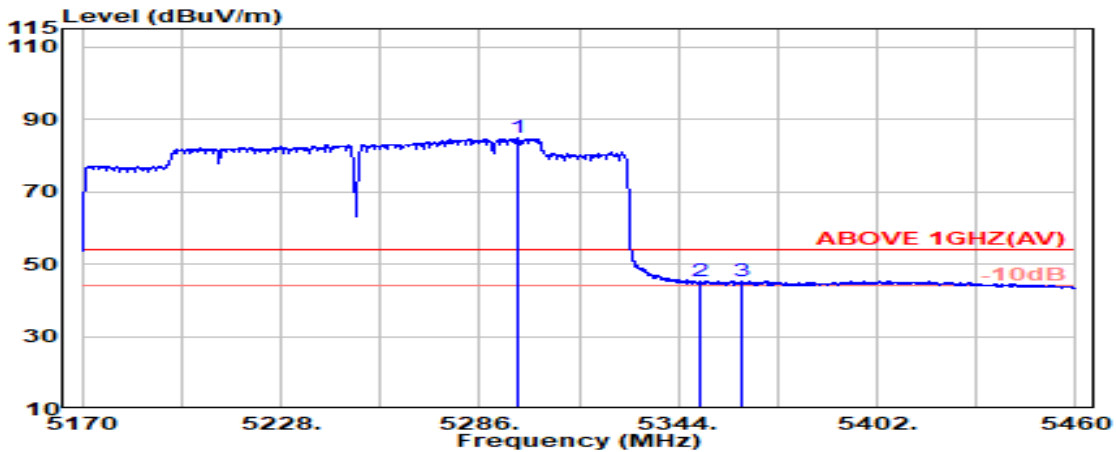


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.300	34.59	8.63	39.26	80.85	84.81	---	---	Average
5350.000	34.50	8.67	39.26	41.22	45.13	54.00	8.87	Average
5362.700	34.53	8.67	39.26	41.47	45.41	54.00	8.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

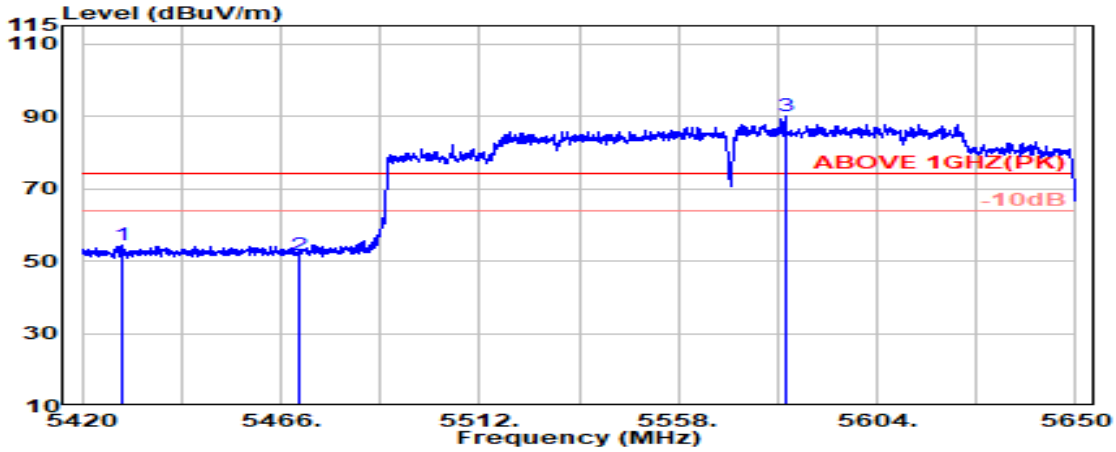

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.400	34.66	8.71	39.25	50.34	54.45	74.00	19.55	Peak
5470.000	34.78	8.74	39.25	47.44	51.70	74.00	22.30	Peak
@ 5582.700	34.73	8.80	39.27	85.65	89.92	---	---	Peak

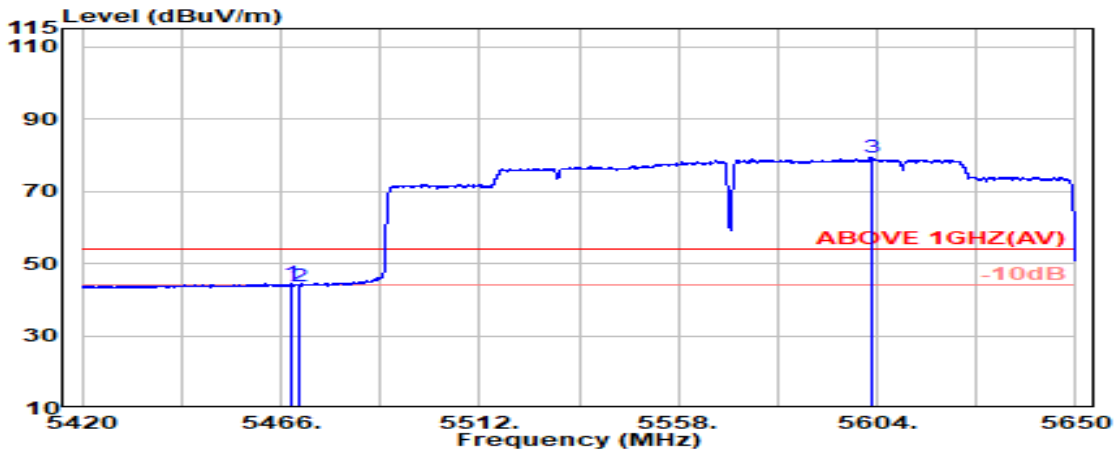


Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.78	8.74	39.25	40.07	44.33	54.00	9.67	Average
5470.000	34.78	8.74	39.25	39.61	43.87	54.00	10.13	Average
@ 5602.800	34.69	8.81	39.27	74.95	79.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

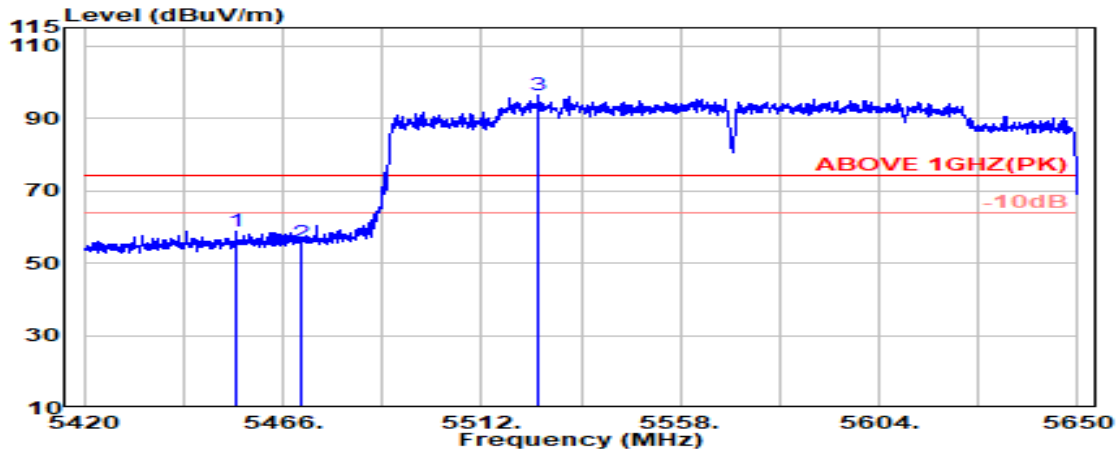
Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
5455.100	34.72	8.73	39.25	54.62	58.81	74.00	15.19	Peak
5470.000	34.78	8.74	39.25	51.42	55.69	74.00	18.31	Peak
@ 5525.200	34.85	8.77	39.25	91.86	96.22	---	---	Peak

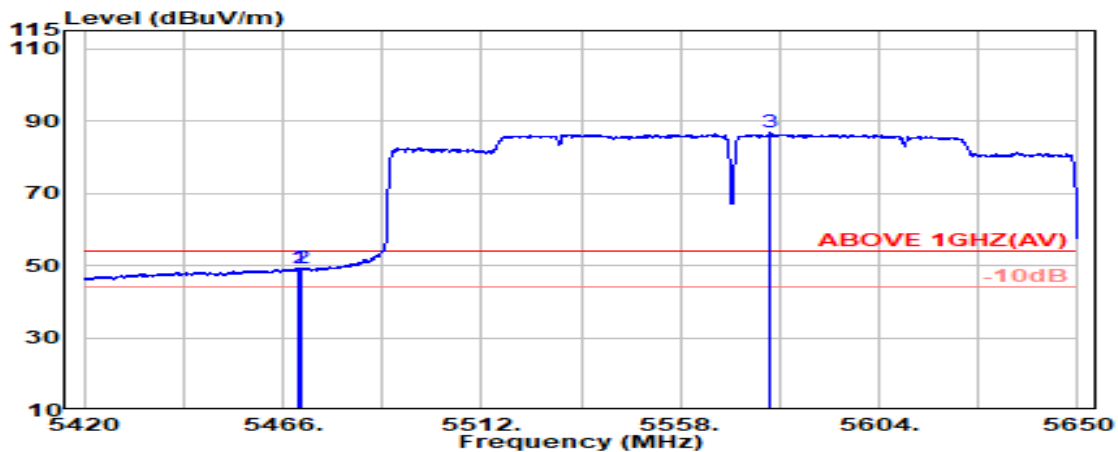
Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
5469.600	34.78	8.74	39.25	45.09	49.36	54.00	4.64	Average
5470.000	34.78	8.74	39.25	44.89	49.15	54.00	4.85	Average
@ 5578.600	34.74	8.80	39.26	82.40	86.68	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

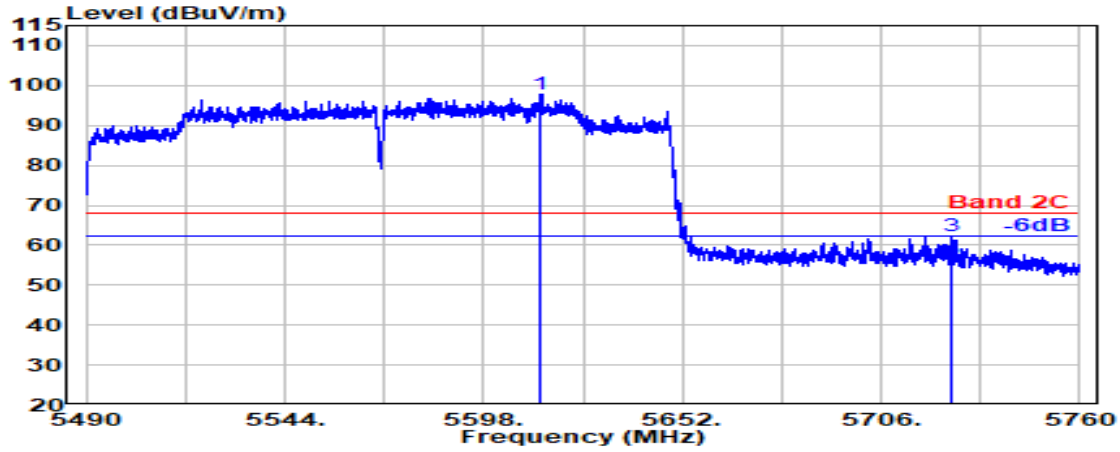

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5576.200	34.75	8.80	39.26	83.95	88.23	---	---	Peak
5725.000	34.45	8.88	39.29	48.87	52.91	68.20	15.29	Peak
5757.500	34.52	8.90	39.30	49.86	53.98	68.20	14.22	Peak

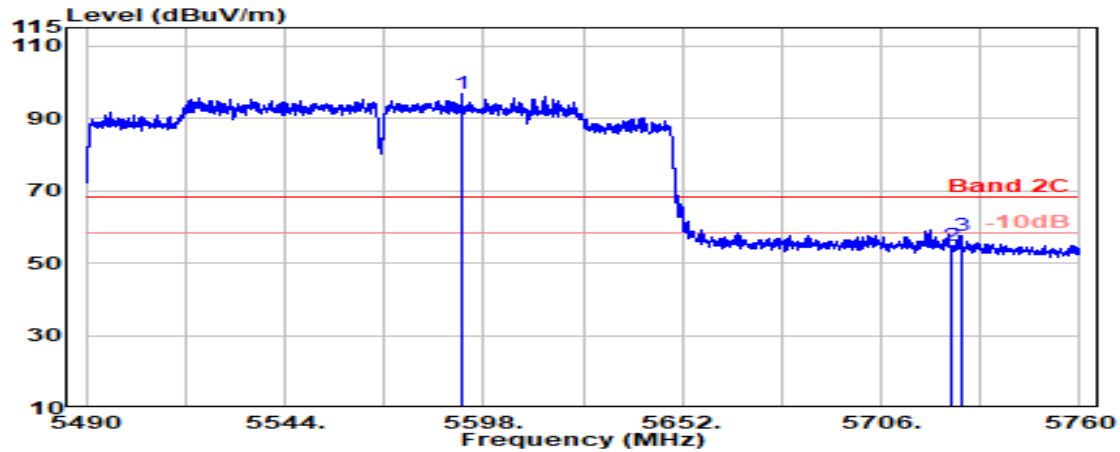


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.200	34.72	8.81	39.27	92.46	96.71	---	---	Peak
5725.000	34.45	8.88	39.29	50.85	54.89	68.20	13.31	Peak
5727.600	34.46	8.88	39.29	53.63	57.67	68.20	10.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

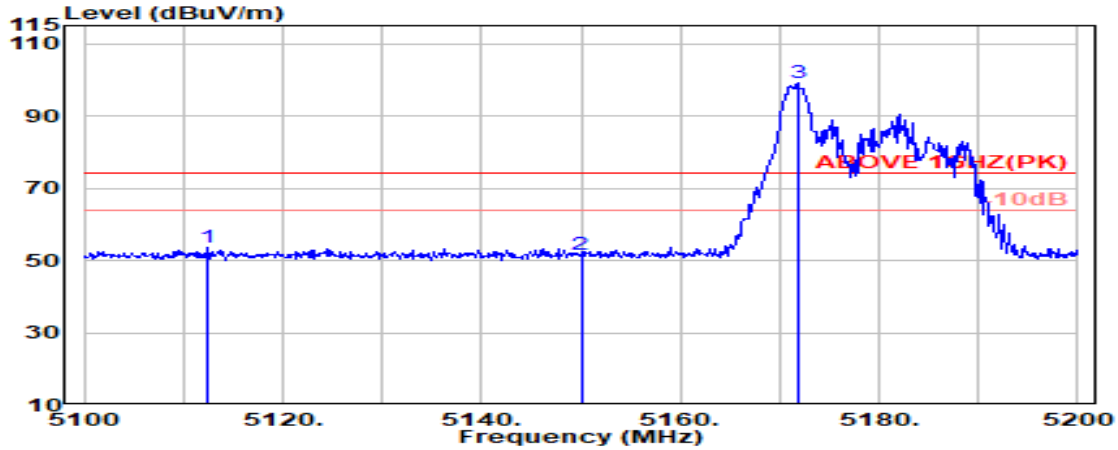

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.300	34.05	8.52	39.29	50.21	53.49	74.00	20.51	Peak
5150.000	34.20	8.54	39.29	48.15	51.61	74.00	22.39	Peak
@ 5171.900	34.24	8.56	39.29	95.45	98.97	---	---	Peak

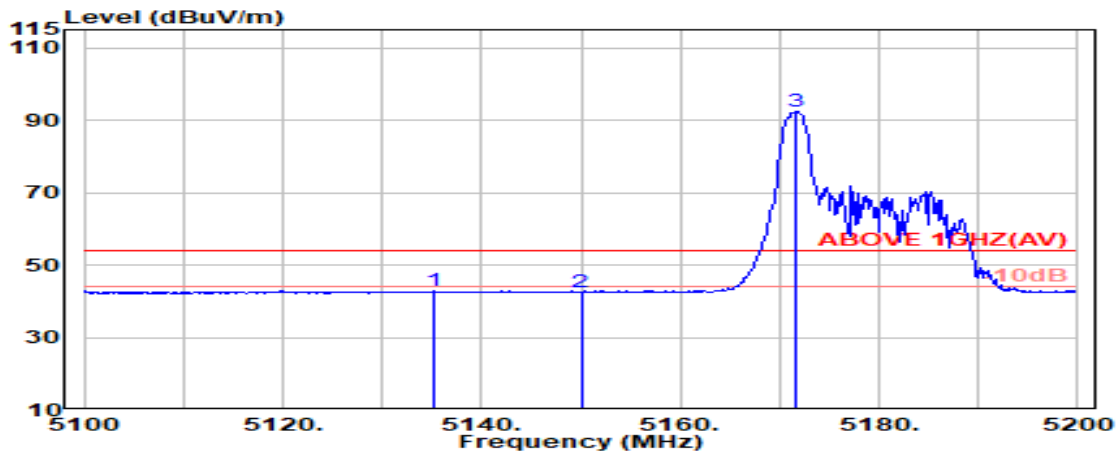


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.300	34.14	8.53	39.29	39.43	42.82	54.00	11.18	Average
5150.000	34.20	8.54	39.29	39.02	42.48	54.00	11.52	Average
@ 5171.700	34.24	8.56	39.29	88.81	92.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

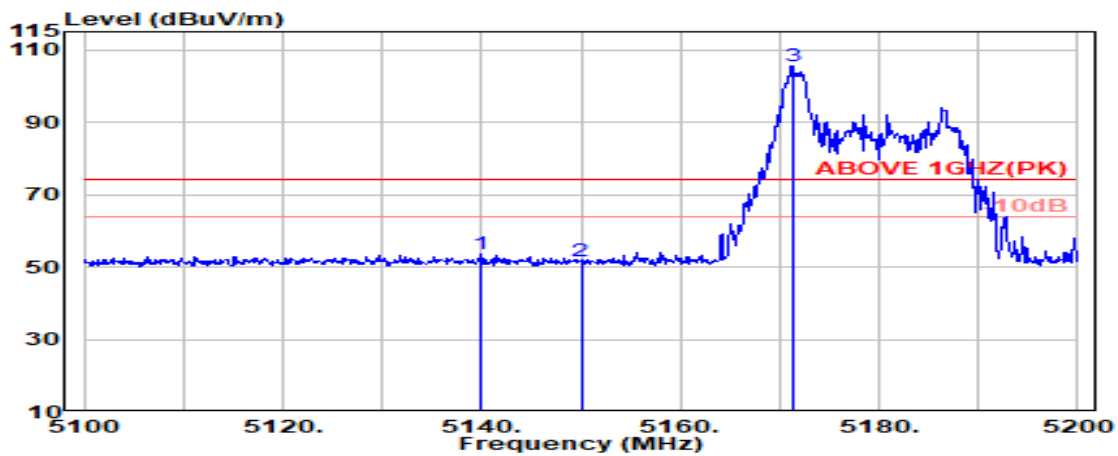

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.000	34.16	8.54	39.29	50.13	53.54	74.00	20.46	Peak
5150.000	34.20	8.54	39.29	48.30	51.75	74.00	22.25	Peak
@ 5171.300	34.24	8.56	39.29	102.07	105.58	---	---	Peak

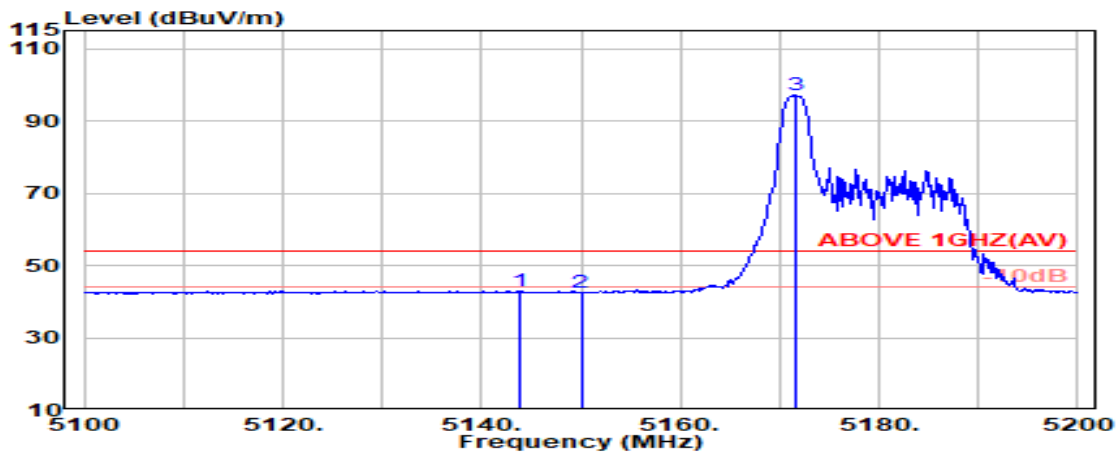


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.800	34.18	8.54	39.29	39.52	42.95	54.00	11.05	Average
5150.000	34.20	8.54	39.29	39.04	42.50	54.00	11.50	Average
@ 5171.700	34.24	8.56	39.29	93.62	97.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

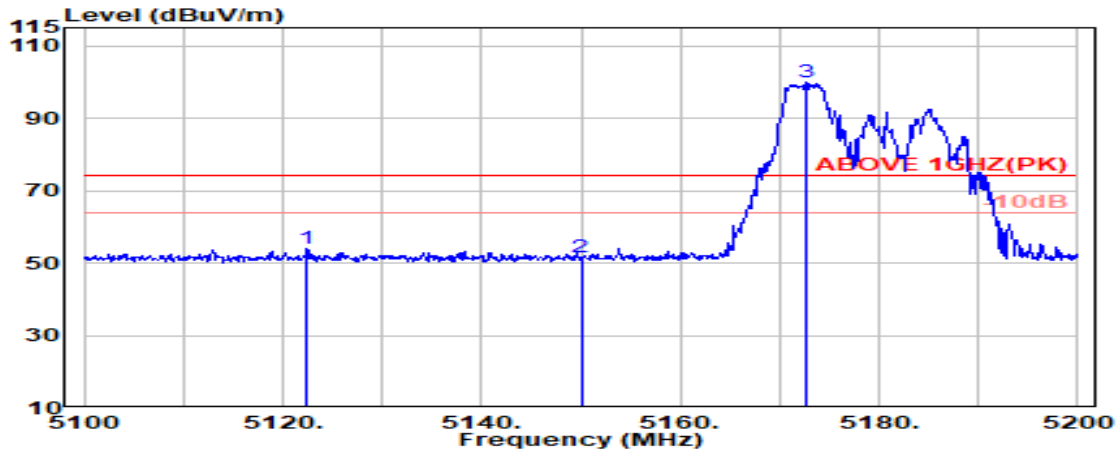

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.400	34.09	8.53	39.29	50.46	53.79	74.00	20.21	Peak
5150.000	34.20	8.54	39.29	48.14	51.59	74.00	22.41	Peak
@ 5172.700	34.25	8.56	39.29	96.44	99.96	---	---	Peak

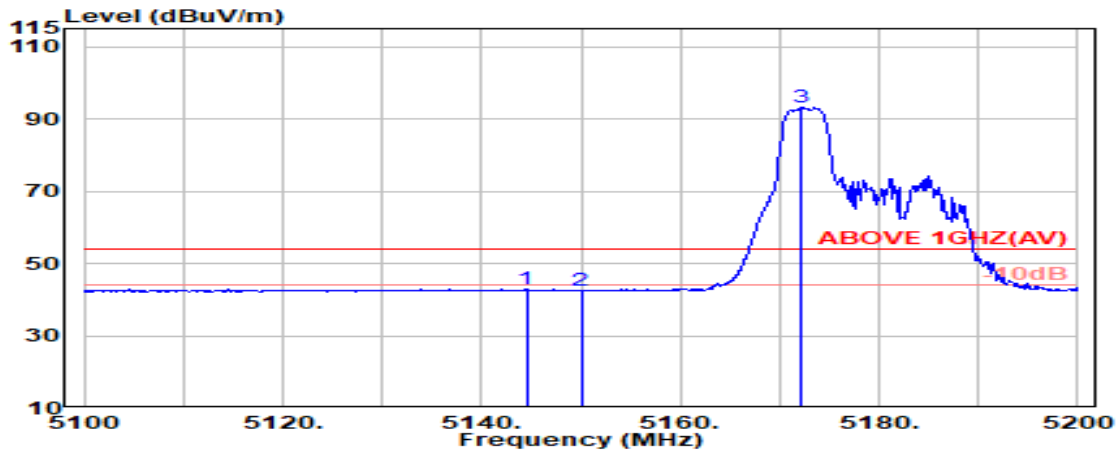


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.500	34.18	8.54	39.29	39.45	42.88	54.00	11.12	Average
5150.000	34.20	8.54	39.29	39.02	42.48	54.00	11.52	Average
@ 5172.100	34.24	8.56	39.29	89.68	93.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

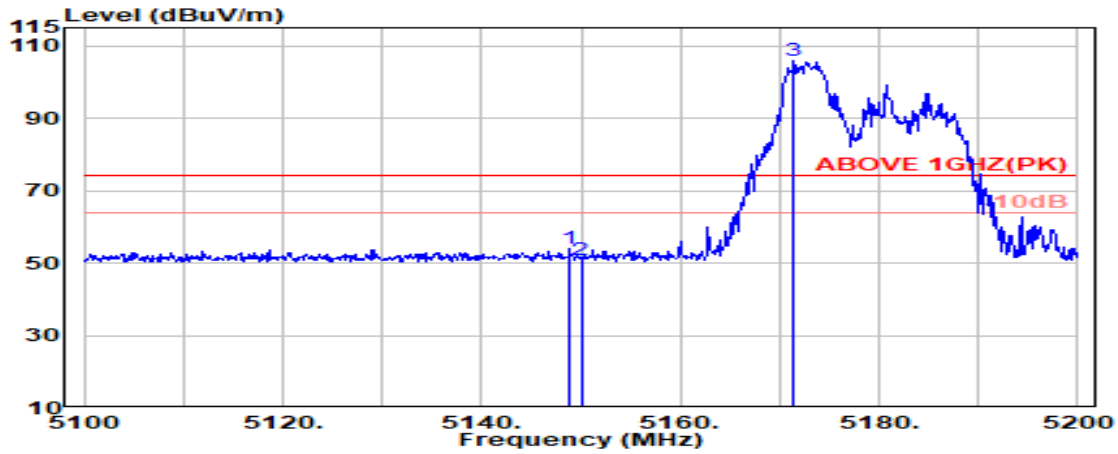

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.20	8.54	39.29	50.49	53.94	74.00	20.06	Peak
5150.000	34.20	8.54	39.29	47.44	50.89	74.00	23.11	Peak
@ 5171.400	34.24	8.56	39.29	102.28	105.79	---	---	Peak

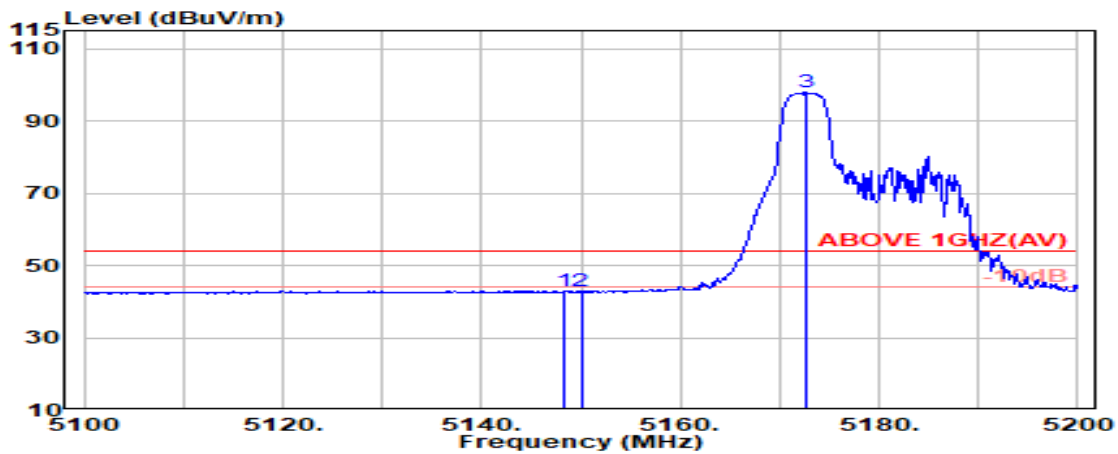


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	34.19	8.54	39.29	39.48	42.92	54.00	11.08	Average
5150.000	34.20	8.54	39.29	39.31	42.76	54.00	11.24	Average
@ 5172.600	34.25	8.56	39.29	94.26	97.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

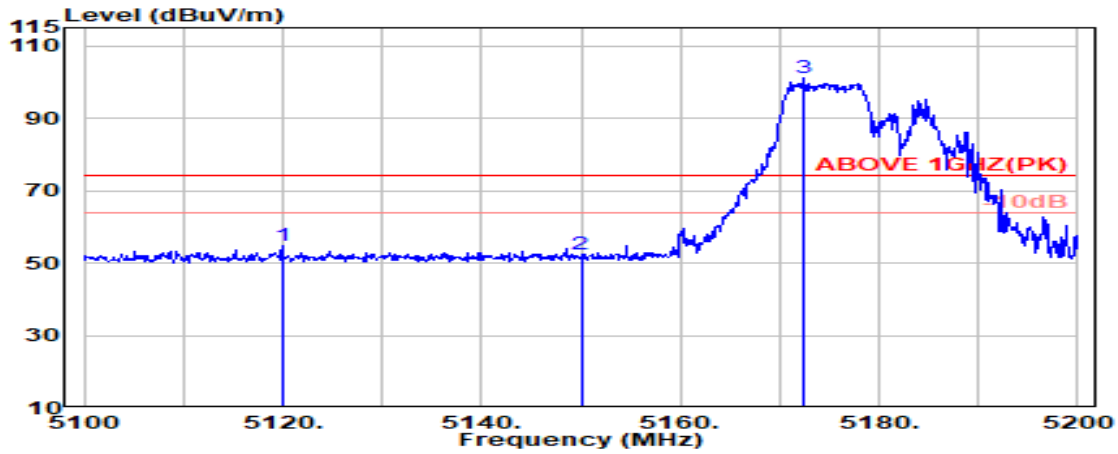

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.900	34.08	8.53	39.29	51.35	54.66	74.00	19.34	Peak
5150.000	34.20	8.54	39.29	49.06	52.51	74.00	21.49	Peak
@ 5172.500	34.25	8.56	39.29	97.58	101.09	---	---	Peak

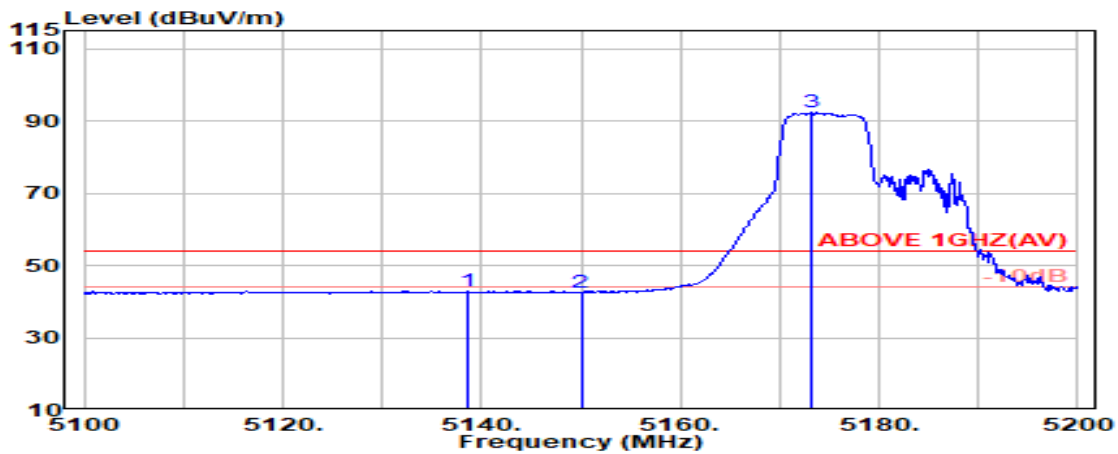


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.700	34.15	8.54	39.29	39.48	42.88	54.00	11.12	Average
5150.000	34.20	8.54	39.29	39.14	42.59	54.00	11.41	Average
@ 5173.200	34.25	8.56	39.29	88.78	92.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

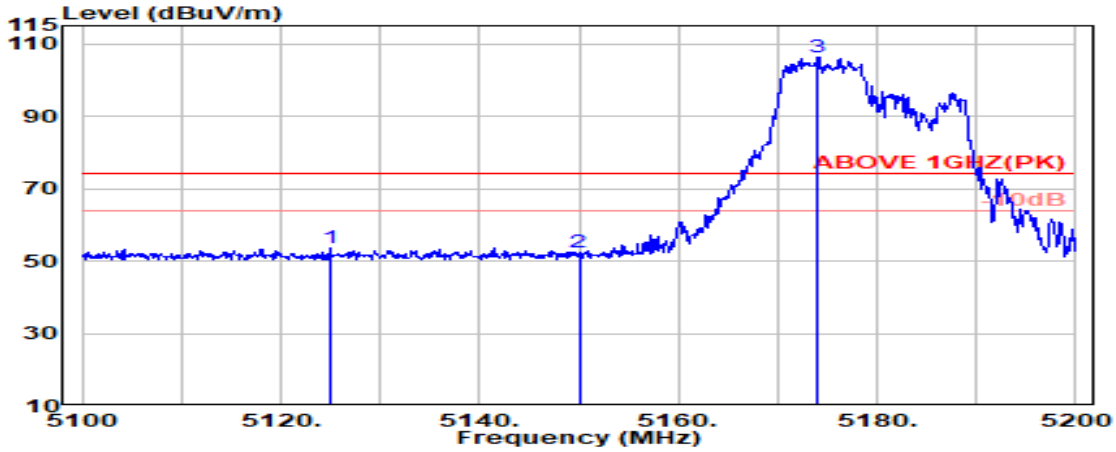

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.000	34.10	8.53	39.29	50.25	53.59	74.00	20.41	Peak
5150.000	34.20	8.54	39.29	48.79	52.25	74.00	21.75	Peak
@ 5174.100	34.25	8.56	39.29	102.86	106.38	---	---	Peak

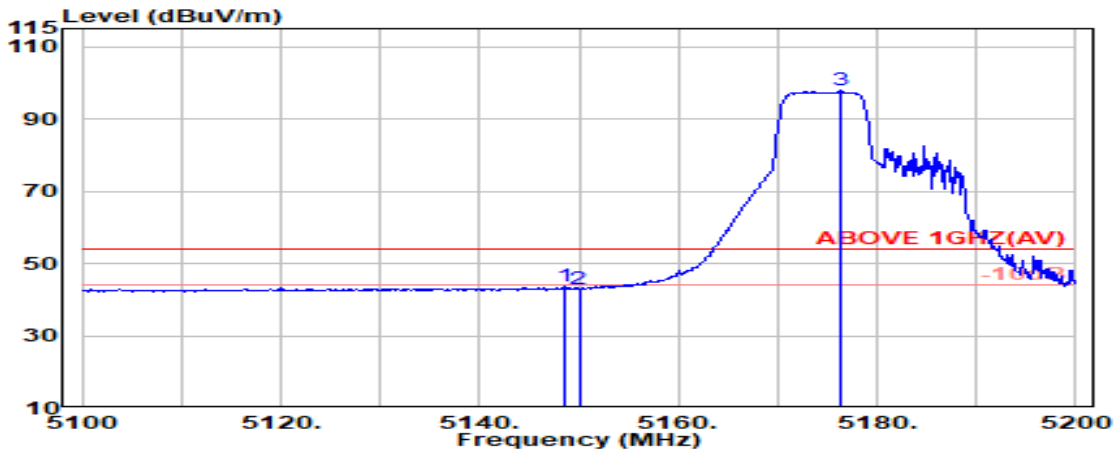


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.19	8.54	39.29	40.05	43.50	54.00	10.50	Average
5150.000	34.20	8.54	39.29	39.59	43.05	54.00	10.95	Average
@ 5176.400	34.25	8.56	39.29	94.36	97.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

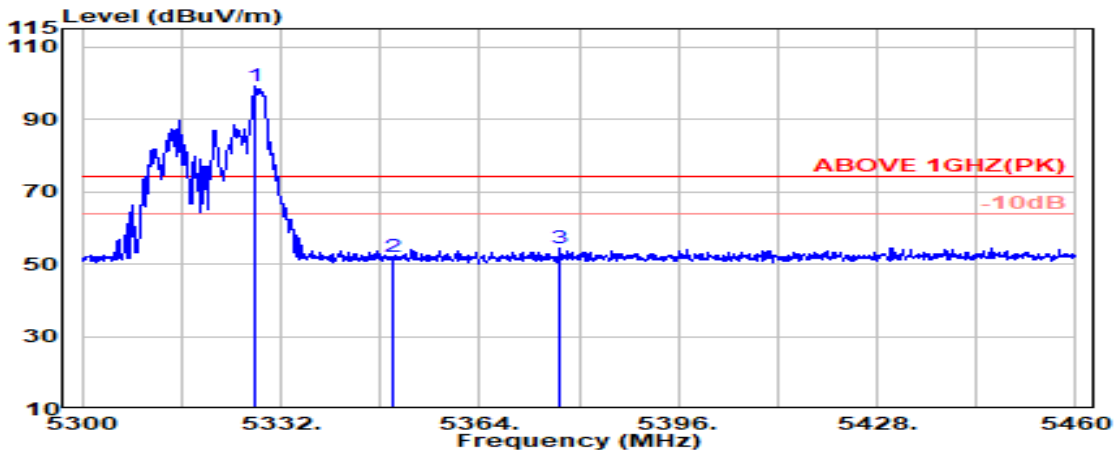

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	34.54	8.65	39.27	95.06	98.98	---	---	Peak
5350.000	34.50	8.67	39.27	47.96	51.85	74.00	22.15	Peak
5376.900	34.55	8.68	39.27	50.46	54.42	74.00	19.58	Peak

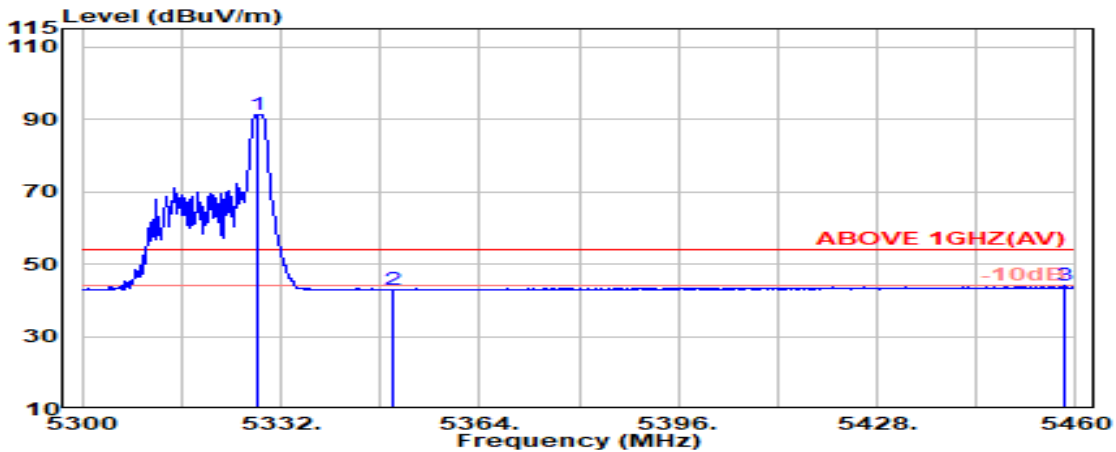


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	34.54	8.65	39.27	87.48	91.40	---	---	Average
5350.000	34.50	8.67	39.27	39.14	43.03	54.00	10.97	Average
5458.000	34.73	8.73	39.26	39.70	43.89	54.00	10.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

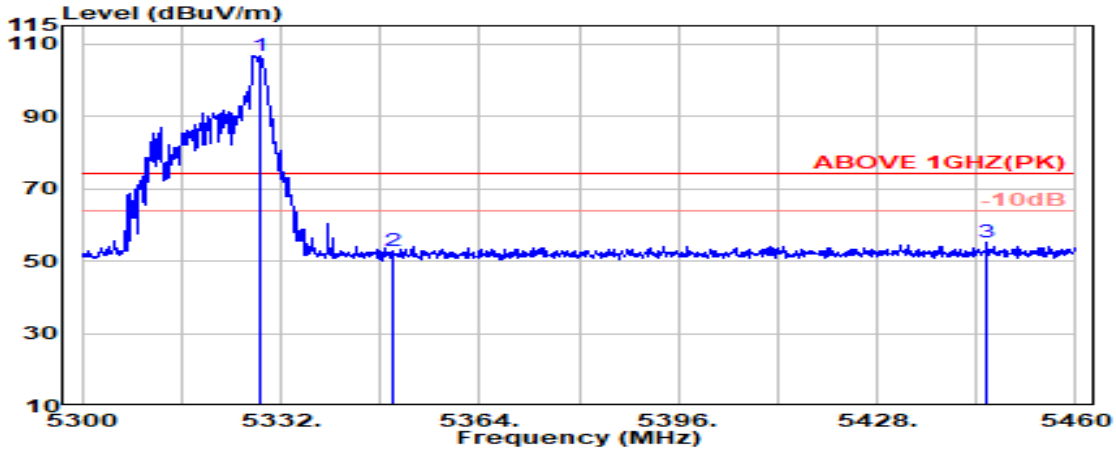

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	34.54	8.65	39.27	102.84	106.76	---	---	Peak
5350.000	34.50	8.67	39.27	48.78	52.67	74.00	21.33	Peak
5445.700	34.69	8.72	39.26	50.85	55.00	74.00	19.00	Peak

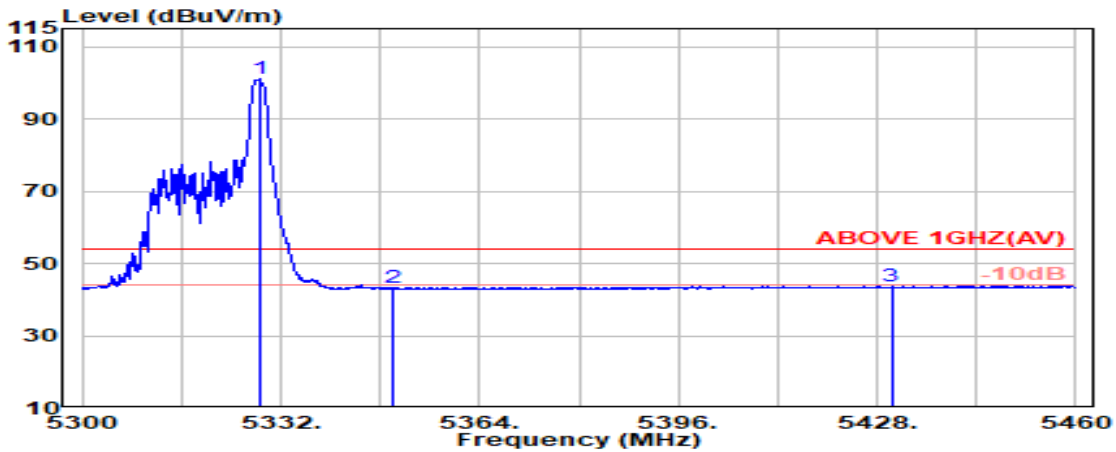


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	34.54	8.65	39.27	97.09	101.01	---	---	Average
5350.000	34.50	8.67	39.27	39.21	43.10	54.00	10.90	Average
5430.300	34.66	8.71	39.27	39.69	43.80	54.00	10.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

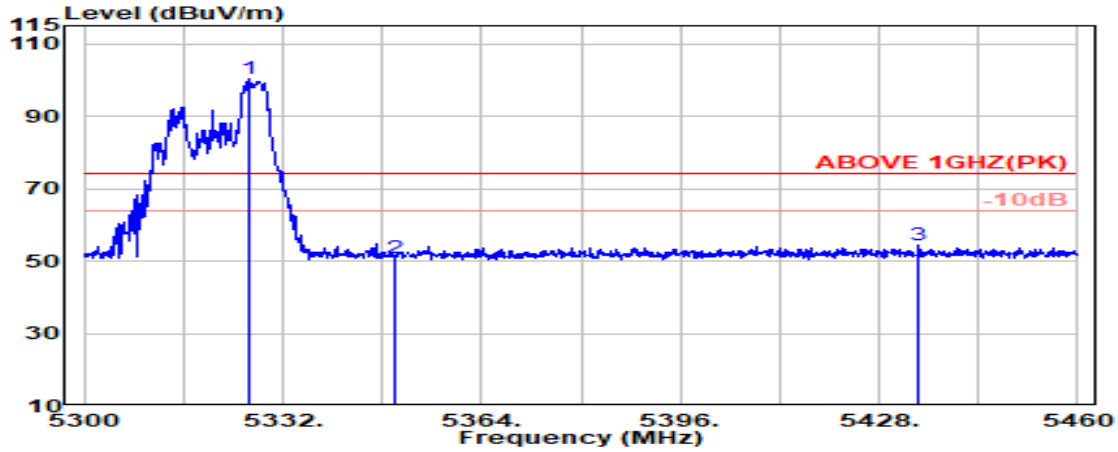

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	34.55	8.65	39.27	96.53	100.46	---	---	Peak
5350.000	34.50	8.67	39.27	46.78	50.68	74.00	23.32	Peak
5434.400	34.67	8.72	39.27	50.12	54.24	74.00	19.76	Peak

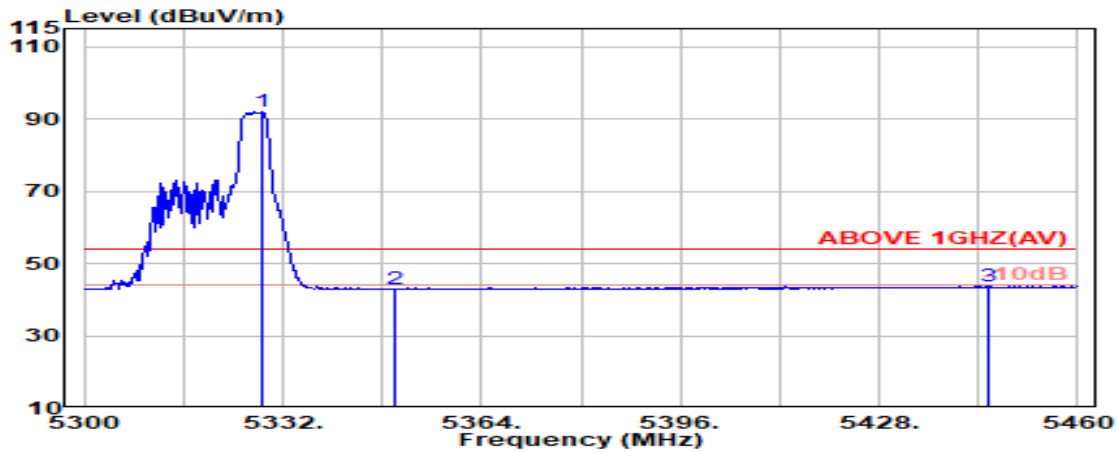


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	34.54	8.65	39.27	88.19	92.11	---	---	Average
5350.000	34.50	8.67	39.27	38.83	42.73	54.00	11.27	Average
5445.700	34.69	8.72	39.26	39.56	43.71	54.00	10.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

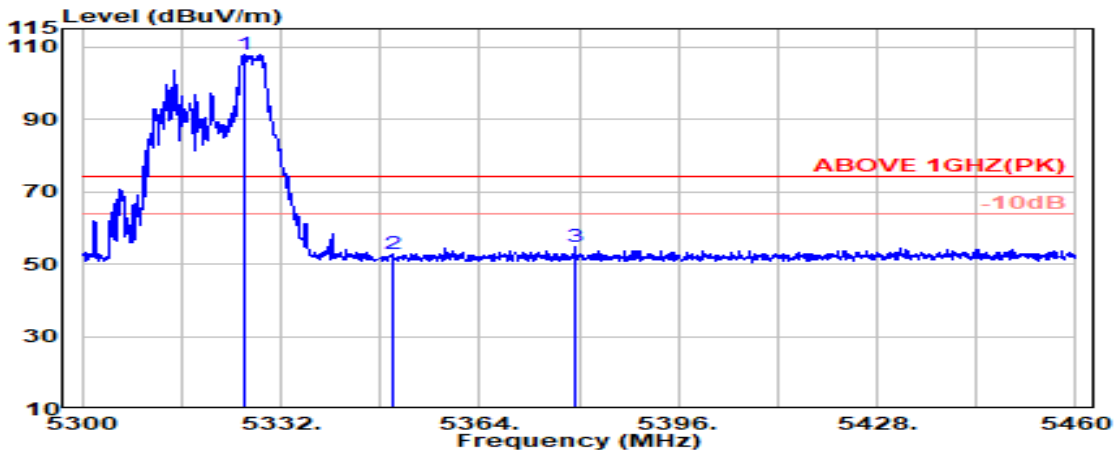

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.200	34.55	8.65	39.27	103.93	107.85	---	---	Peak
5350.000	34.50	8.67	39.27	48.92	52.81	74.00	21.19	Peak
5379.300	34.56	8.68	39.27	50.96	54.93	74.00	19.07	Peak

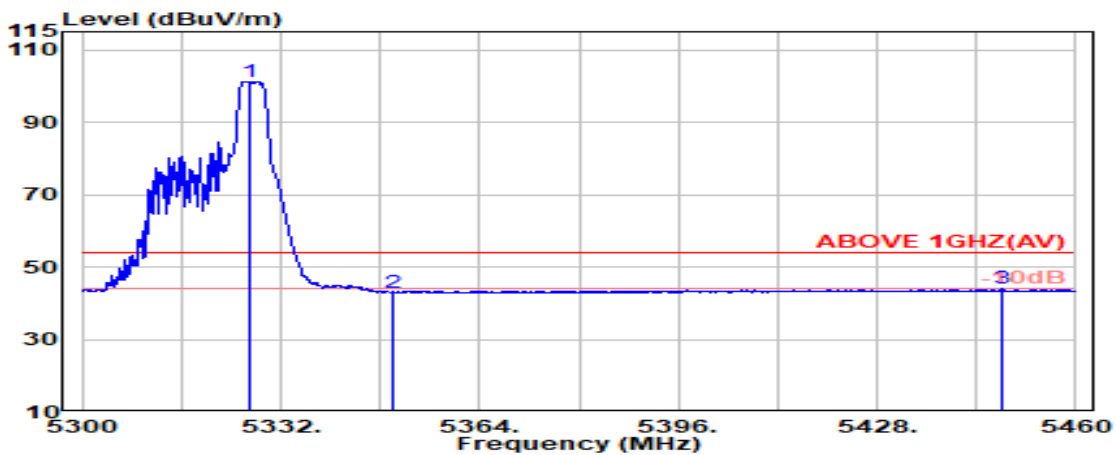


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.800	34.55	8.65	39.27	97.35	101.27	---	---	Average
5350.000	34.50	8.67	39.27	39.06	42.96	54.00	11.04	Average
5448.100	34.70	8.72	39.26	39.75	43.90	54.00	10.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

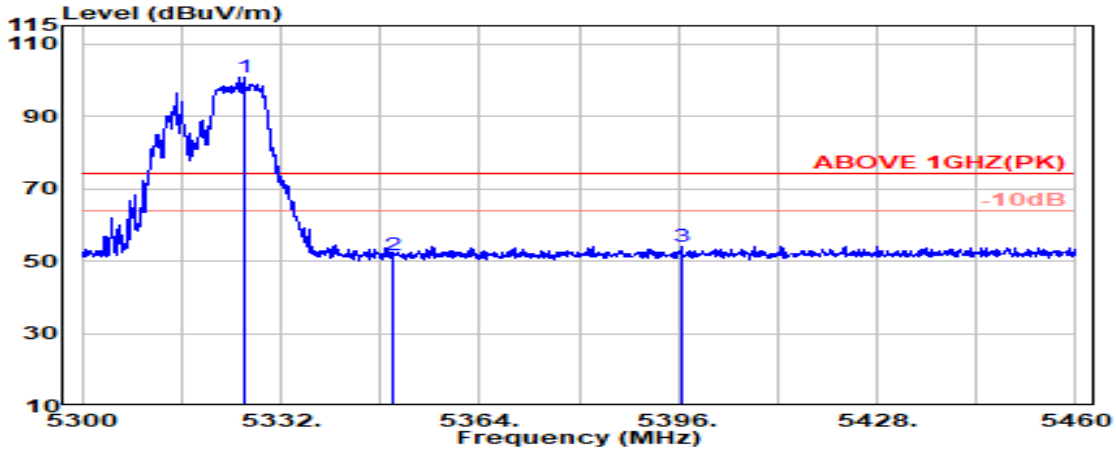

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	34.55	8.65	39.27	96.74	100.67	---	---	Peak
5350.000	34.50	8.67	39.27	47.80	51.69	74.00	22.31	Peak
5396.400	34.59	8.69	39.27	50.12	54.14	74.00	19.86	Peak

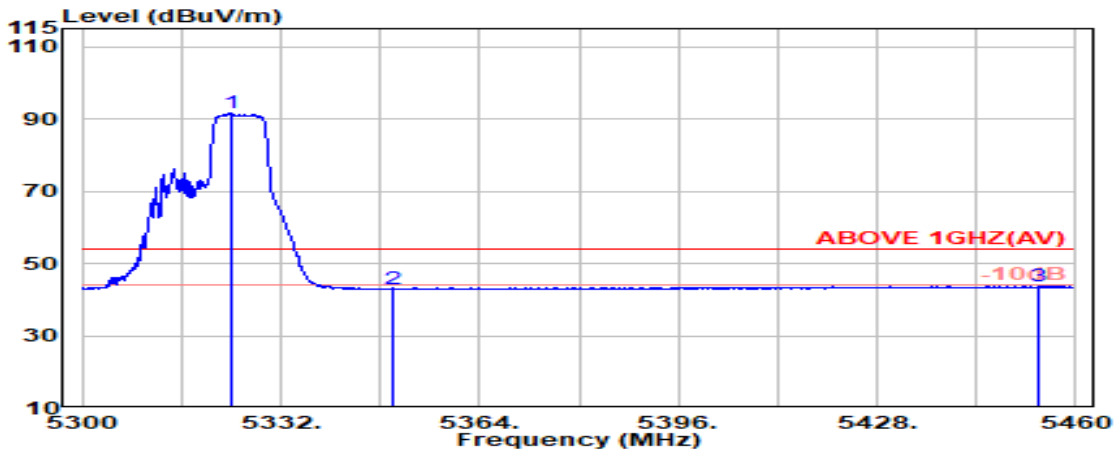

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	34.55	8.65	39.27	96.74	100.67	---	---	Average
5350.000	34.50	8.67	39.27	47.80	51.69	54.00	2.31	Average
5396.400	34.59	8.69	39.27	50.12	54.14	54.00	-0.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

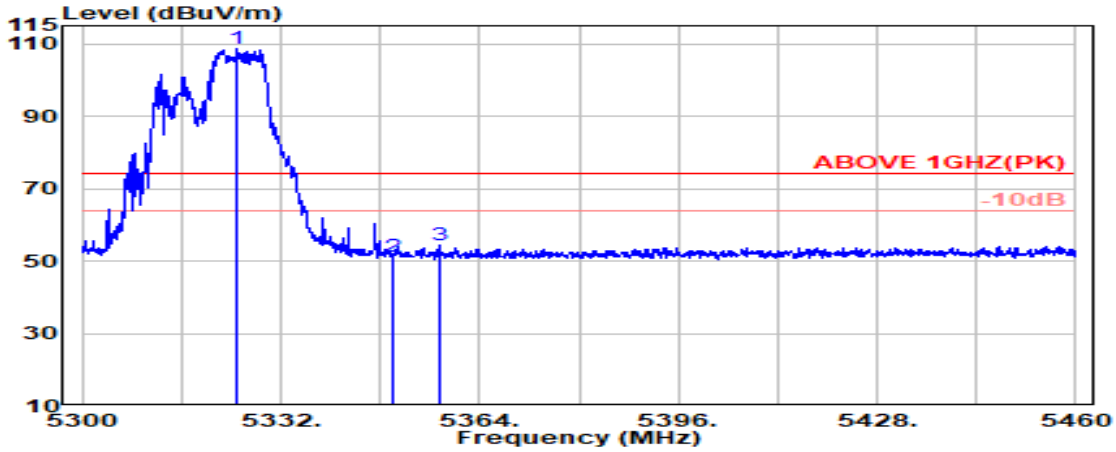

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.000	34.55	8.65	39.27	104.58	108.51	---	---	Peak
5350.000	34.50	8.67	39.27	47.22	51.11	74.00	22.89	Peak
5357.600	34.52	8.67	39.27	50.35	54.26	74.00	19.74	Peak

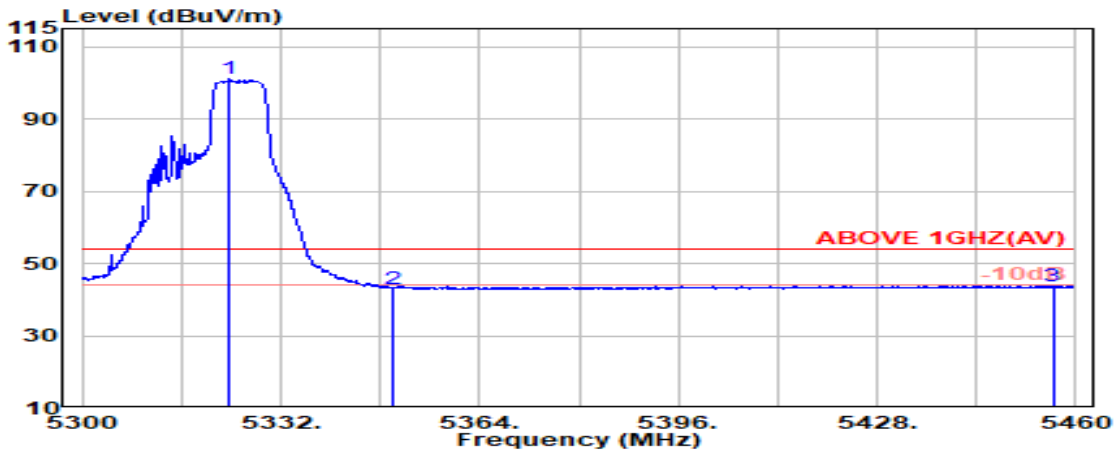


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.55	8.65	39.27	97.02	100.95	---	---	Average
5350.000	34.50	8.67	39.27	39.13	43.02	54.00	10.98	Average
5456.300	34.73	8.73	39.26	39.56	43.75	54.00	10.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

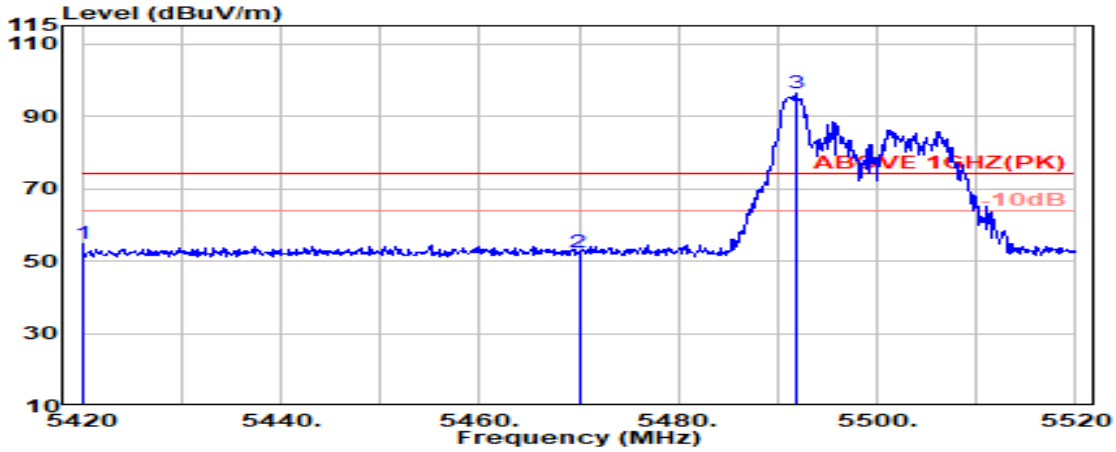

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.000	34.64	8.71	39.27	50.57	54.65	74.00	19.35	Peak
5470.000	34.78	8.74	39.26	48.14	52.39	74.00	21.61	Peak
@ 5491.900	34.87	8.75	39.26	92.06	96.41	---	---	Peak

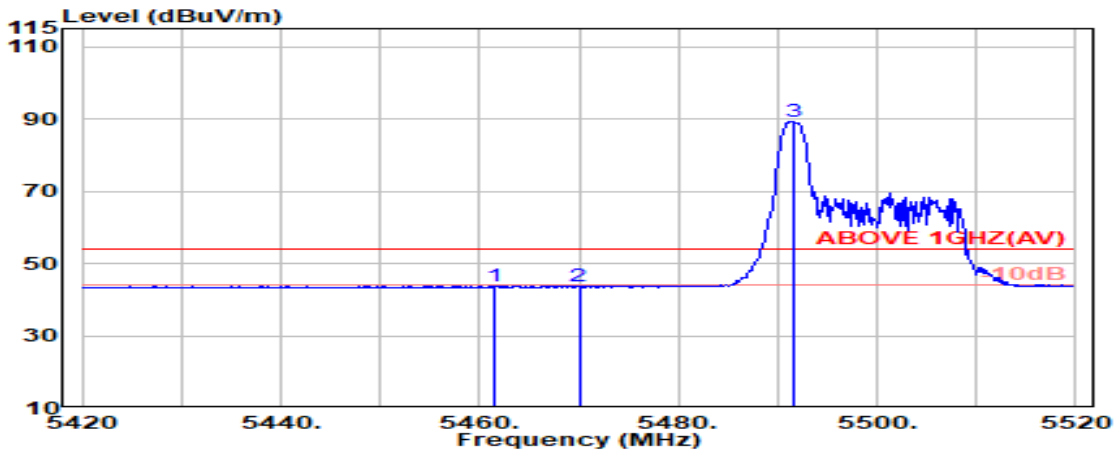


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.400	34.75	8.73	39.26	39.66	43.87	54.00	10.13	Average
5470.000	34.78	8.74	39.26	39.29	43.54	54.00	10.46	Average
@ 5491.700	34.87	8.75	39.26	85.05	89.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

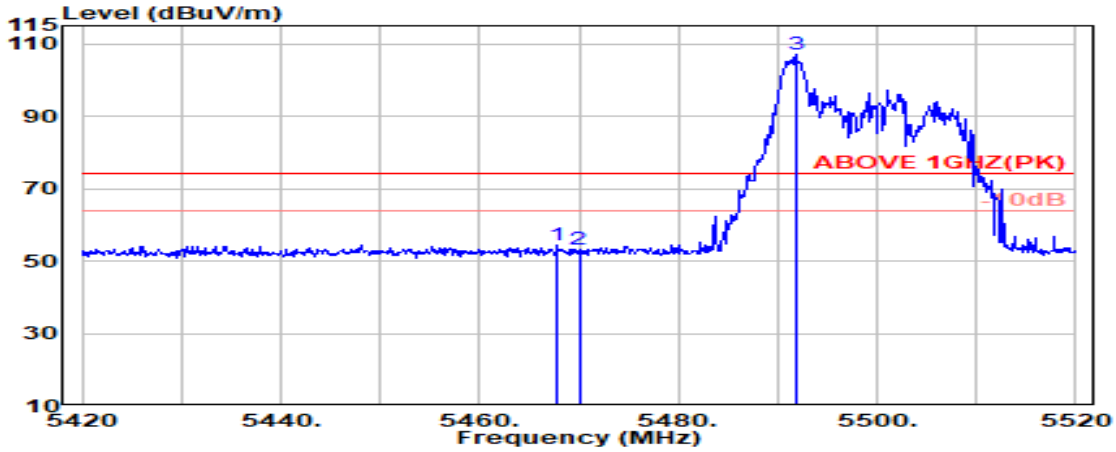

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.77	8.73	39.26	50.15	54.39	74.00	19.61	Peak
5470.000	34.78	8.74	39.26	48.92	53.18	74.00	20.82	Peak
@ 5491.800	34.87	8.75	39.26	102.66	107.02	---	---	Peak

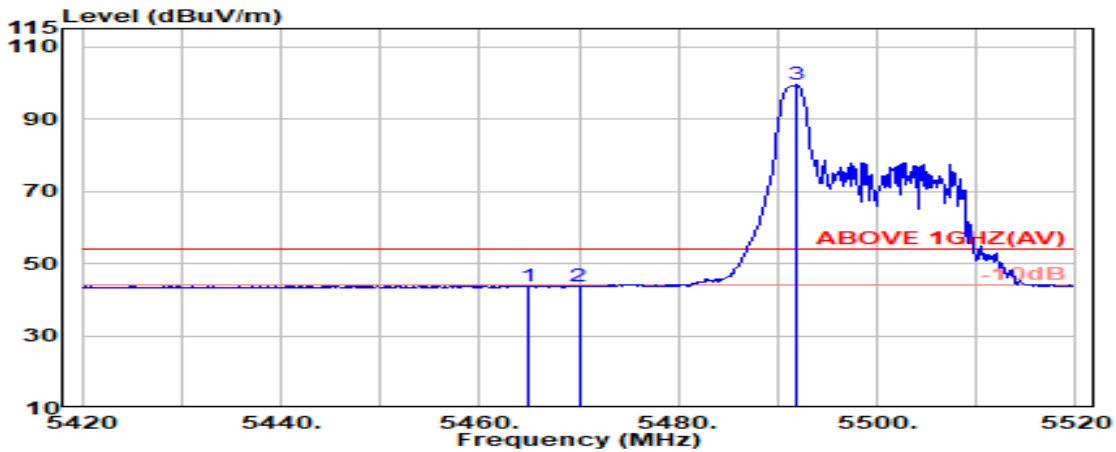


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.76	8.73	39.26	39.57	43.80	54.00	10.20	Average
5470.000	34.78	8.74	39.26	39.37	43.62	54.00	10.38	Average
@ 5491.800	34.87	8.75	39.26	95.06	99.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

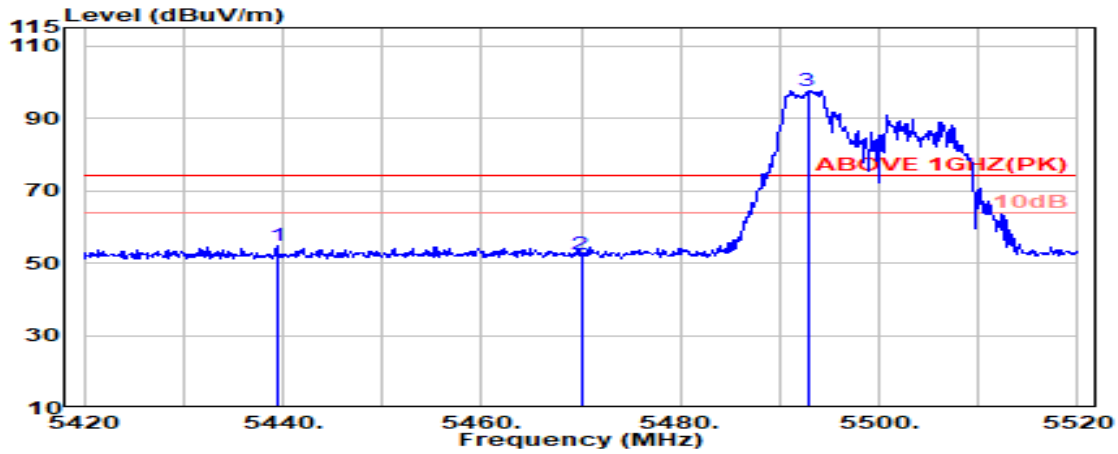

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.400	34.68	8.72	39.26	50.80	54.93	74.00	19.07	Peak
5470.000	34.78	8.74	39.26	47.97	52.22	74.00	21.78	Peak
@ 5492.800	34.87	8.75	39.26	93.39	97.75	---	---	Peak

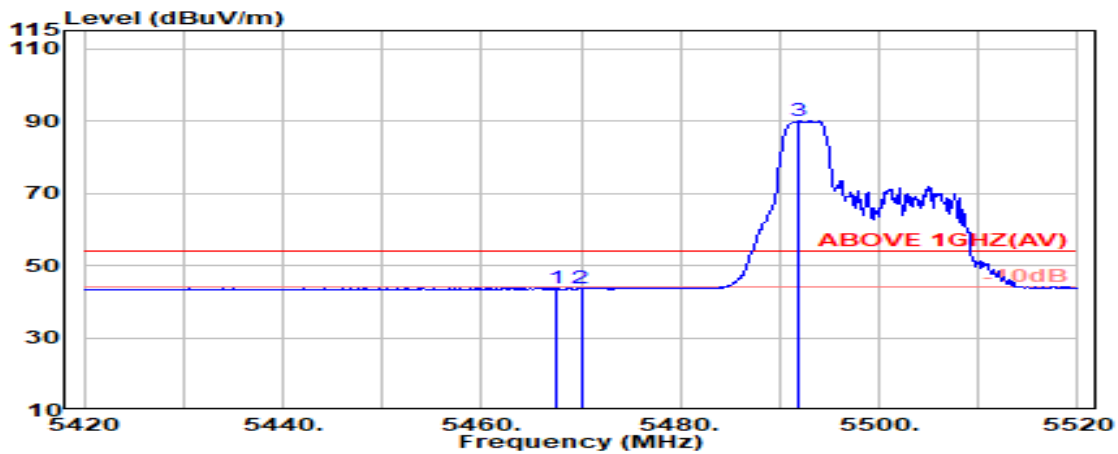


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.77	8.73	39.26	39.60	43.84	54.00	10.16	Average
5470.000	34.78	8.74	39.26	39.29	43.54	54.00	10.46	Average
@ 5491.800	34.87	8.75	39.26	85.64	90.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

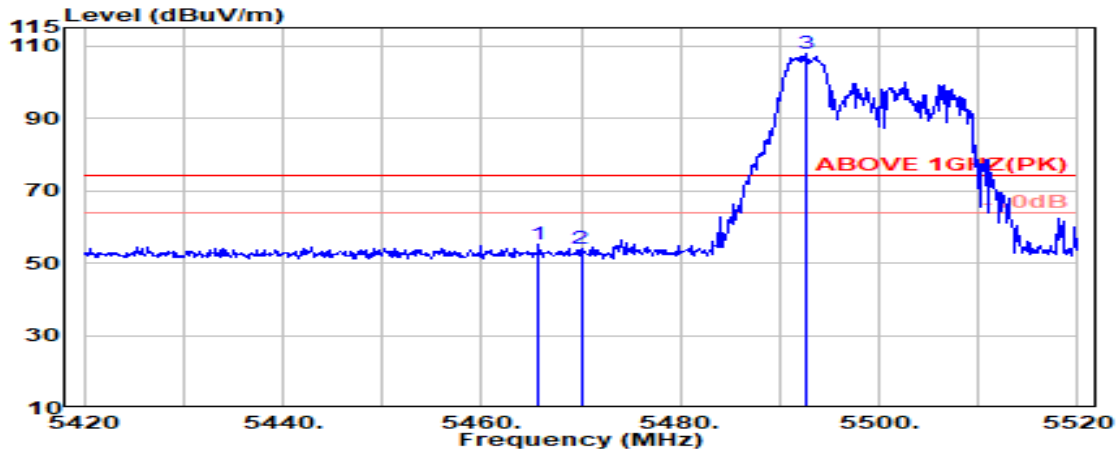

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.76	8.73	39.26	50.90	55.14	74.00	18.86	Peak
5470.000	34.78	8.74	39.26	49.73	53.99	74.00	20.01	Peak
@ 5492.600	34.87	8.75	39.26	103.35	107.71	---	---	Peak

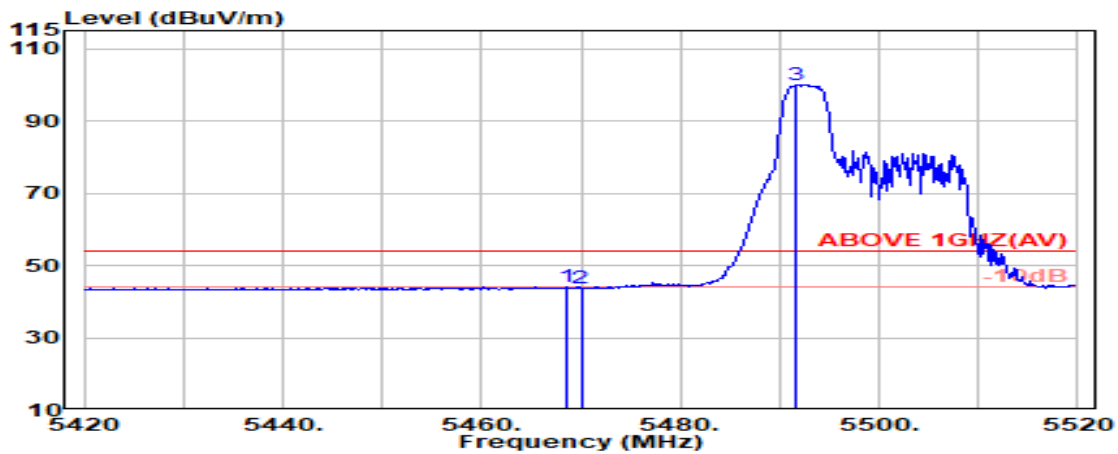


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.77	8.73	39.26	39.70	43.95	54.00	10.05	Average
5470.000	34.78	8.74	39.26	39.42	43.67	54.00	10.33	Average
@ 5491.700	34.87	8.75	39.26	95.75	100.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

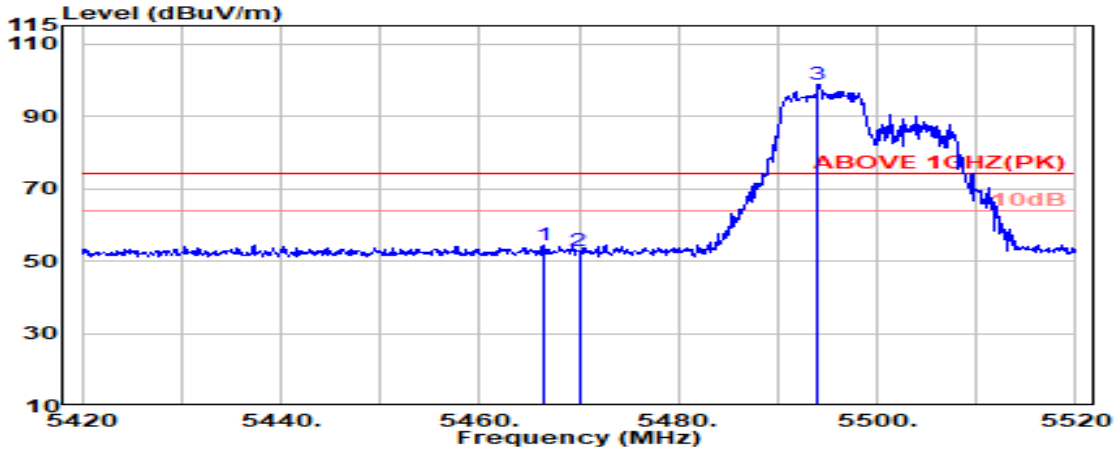

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.77	8.73	39.26	50.23	54.46	74.00	19.54	Peak
5470.000	34.78	8.74	39.26	48.62	52.87	74.00	21.13	Peak
@ 5494.100	34.88	8.75	39.26	94.51	98.87	---	---	Peak

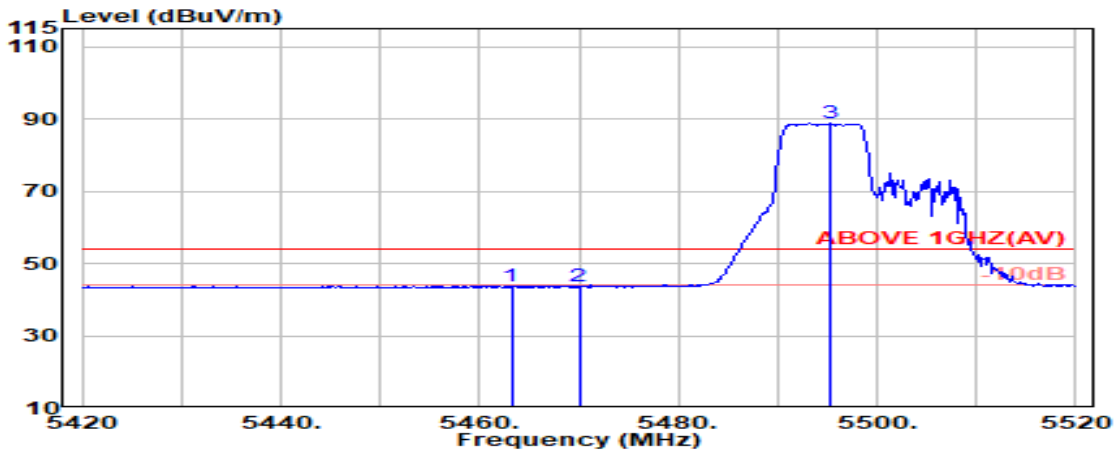


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.200	34.75	8.73	39.26	39.56	43.79	54.00	10.21	Average
5470.000	34.78	8.74	39.26	39.47	43.73	54.00	10.27	Average
@ 5495.300	34.88	8.75	39.26	84.31	88.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

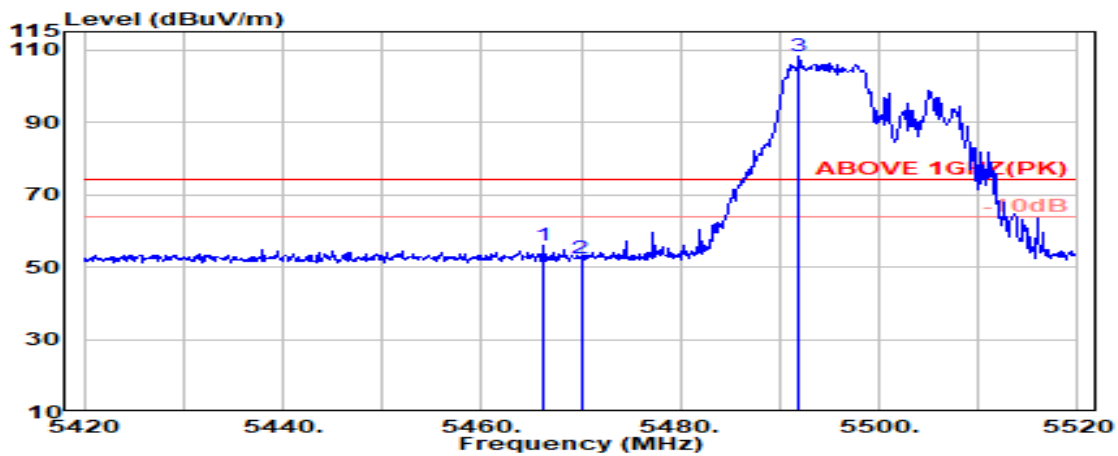

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.77	8.73	39.26	51.90	56.14	74.00	17.86	Peak
5470.000	34.78	8.74	39.26	47.99	52.25	74.00	21.75	Peak
@ 5491.900	34.87	8.75	39.26	103.83	108.18	---	---	Peak

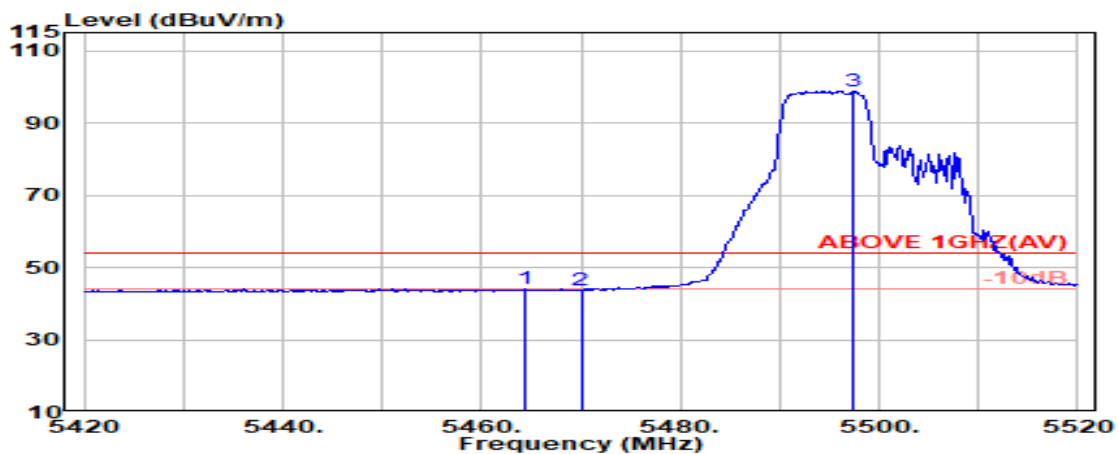


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.300	34.76	8.73	39.26	39.80	44.03	54.00	9.97	Average
5470.000	34.78	8.74	39.26	39.48	43.73	54.00	10.27	Average
@ 5497.500	34.89	8.75	39.26	94.57	98.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

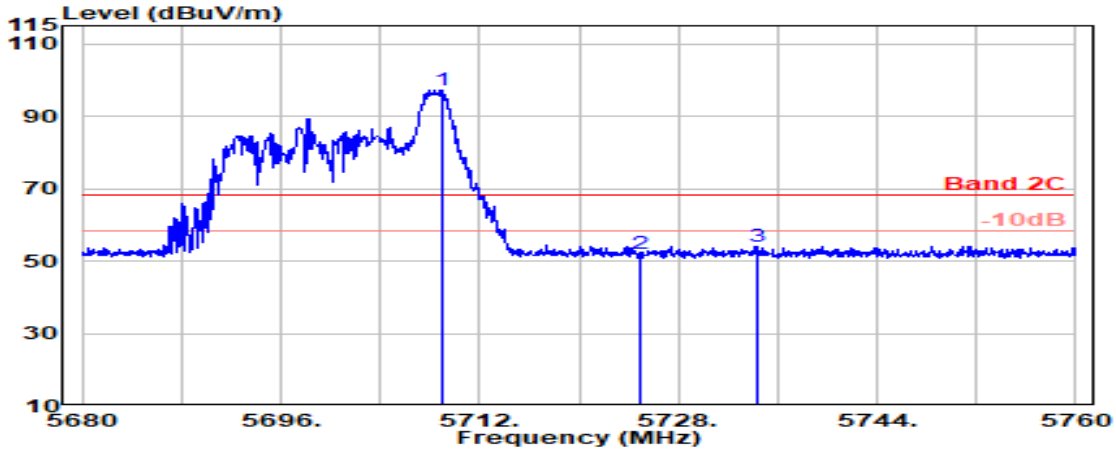

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5709.100	34.42	8.87	39.30	93.10	97.09	---	---	Peak
5725.000	34.45	8.88	39.31	47.82	51.85	68.20	16.35	Peak
5734.400	34.47	8.89	39.31	50.12	54.17	68.20	14.03	Peak

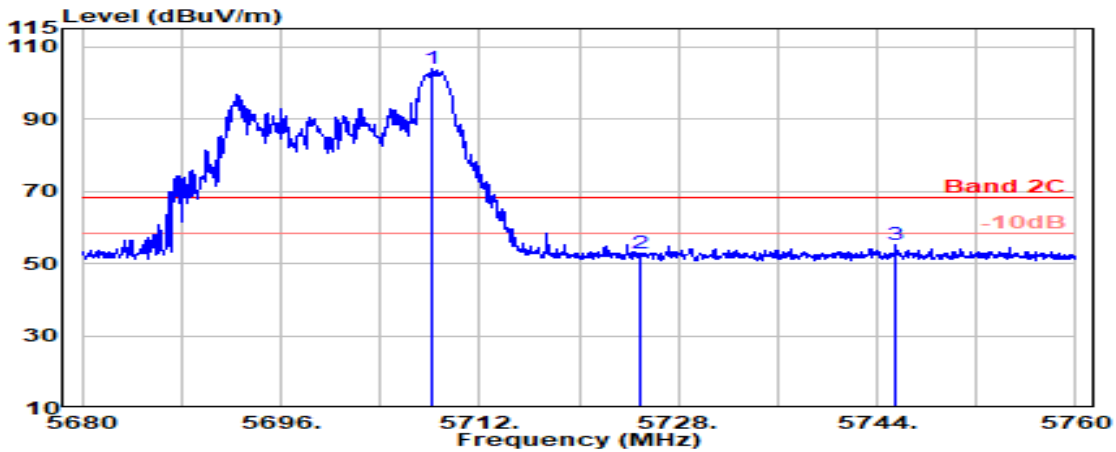


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	34.42	8.87	39.30	99.97	103.96	---	---	Peak
5725.000	34.45	8.88	39.31	48.62	52.64	68.20	15.56	Peak
5745.550	34.49	8.89	39.31	51.27	55.35	68.20	12.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

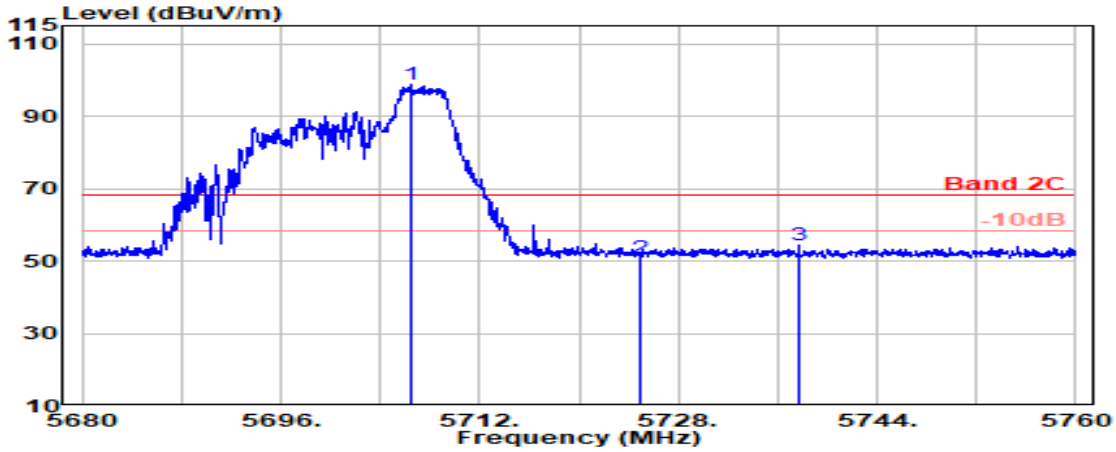

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.550	34.41	8.87	39.30	94.87	98.85	---	---	Peak
5725.000	34.45	8.88	39.31	46.96	50.99	68.20	17.21	Peak
5737.750	34.48	8.89	39.31	50.15	54.20	68.20	14.00	Peak

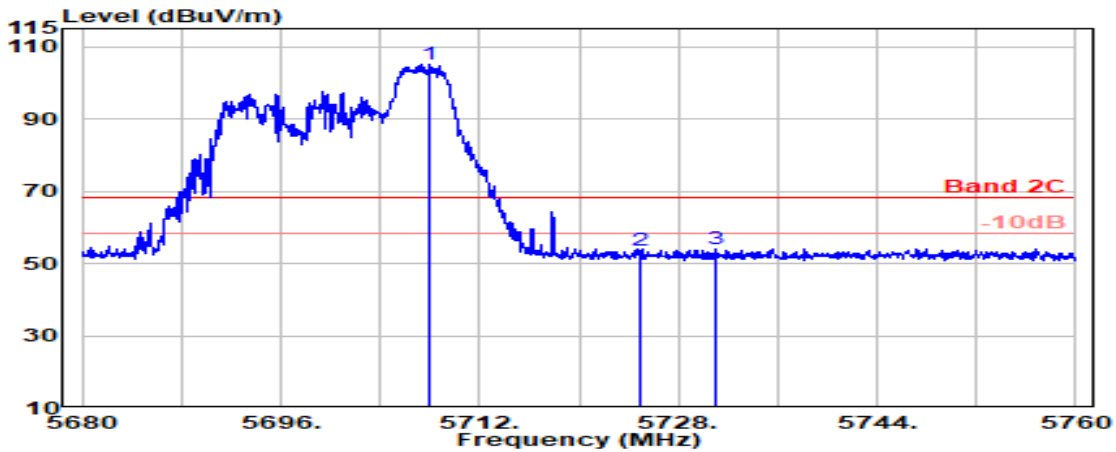


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	34.42	8.87	39.30	101.00	104.99	---	---	Peak
5725.000	34.45	8.88	39.31	49.43	53.45	68.20	14.75	Peak
5731.100	34.46	8.88	39.31	50.07	54.11	68.20	14.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

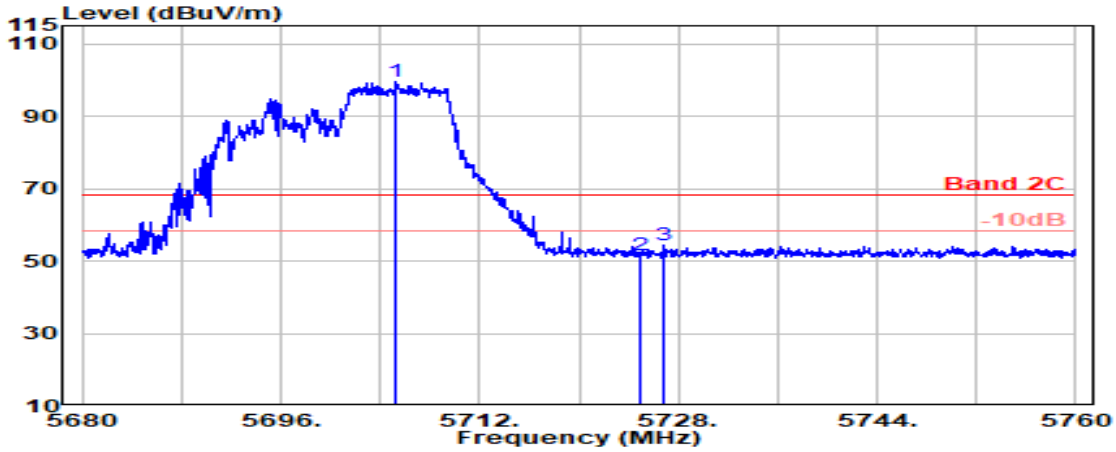

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.250	34.41	8.87	39.30	95.62	99.59	---	---	Peak
5725.000	34.45	8.88	39.31	47.54	51.57	68.20	16.63	Peak
5726.900	34.45	8.88	39.31	50.54	54.57	68.20	13.63	Peak

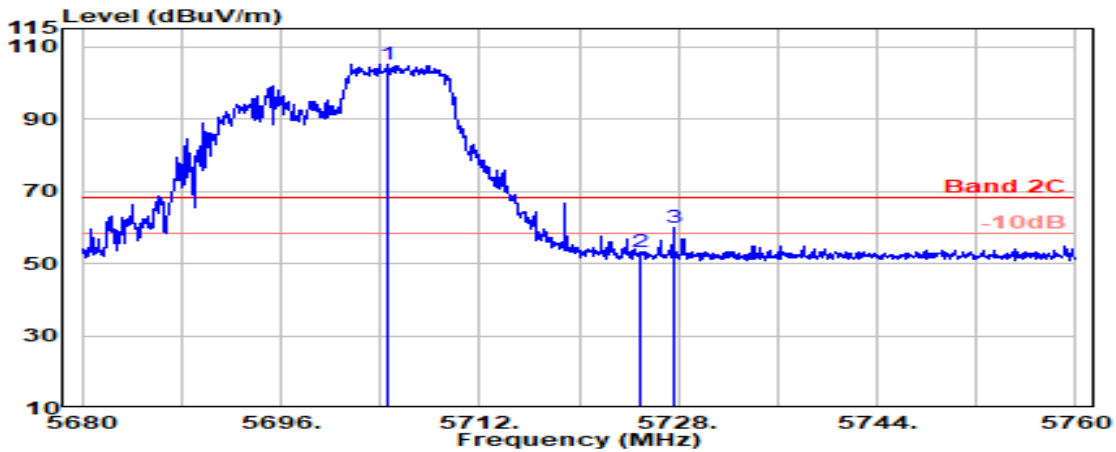


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.550	34.41	8.87	39.30	101.32	105.29	---	---	Peak
5725.000	34.45	8.88	39.31	49.04	53.07	68.20	15.13	Peak
5727.600	34.46	8.88	39.31	55.71	59.75	68.20	8.45	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

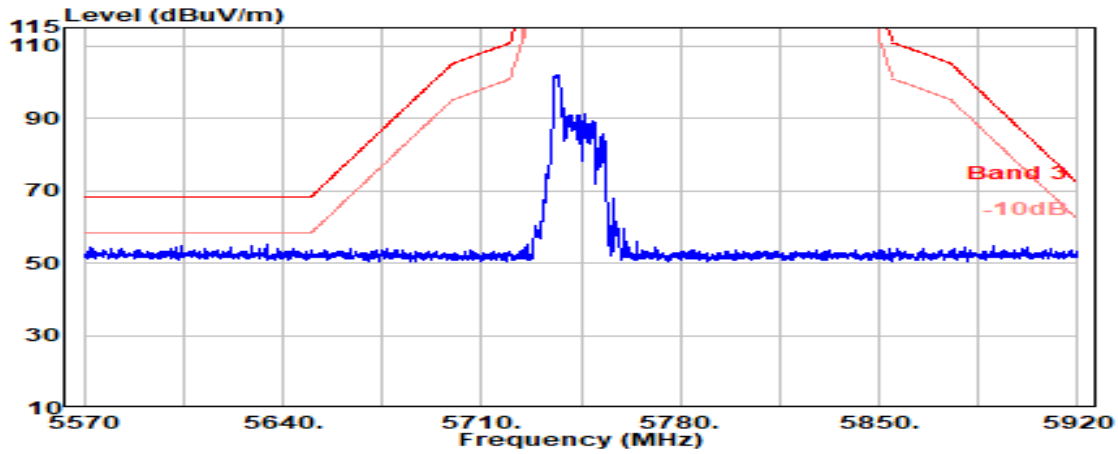


Antenna at Vertical Polarization

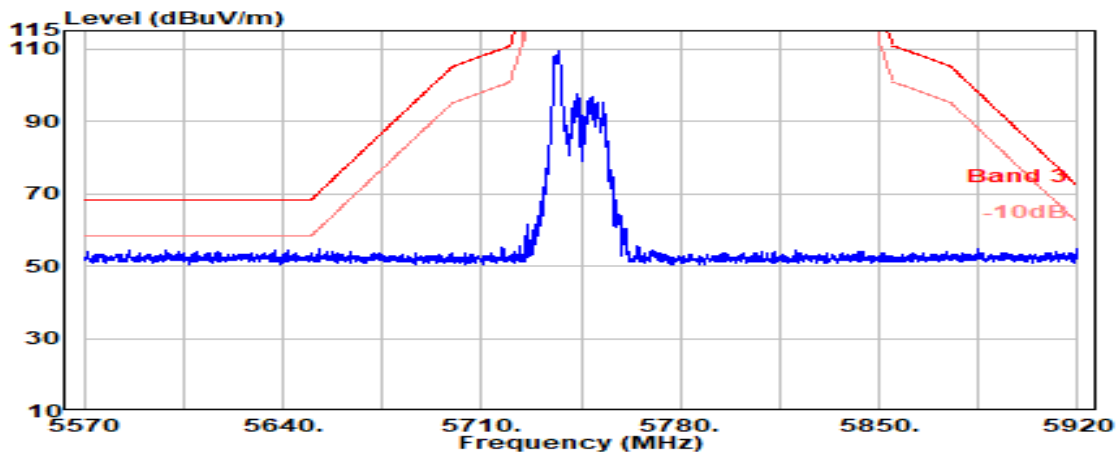


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

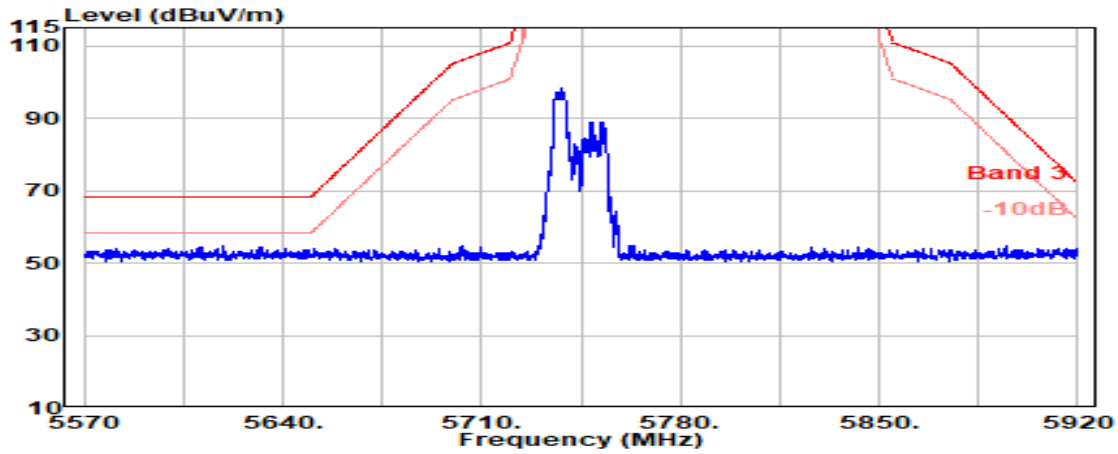


Antenna at Vertical Polarization

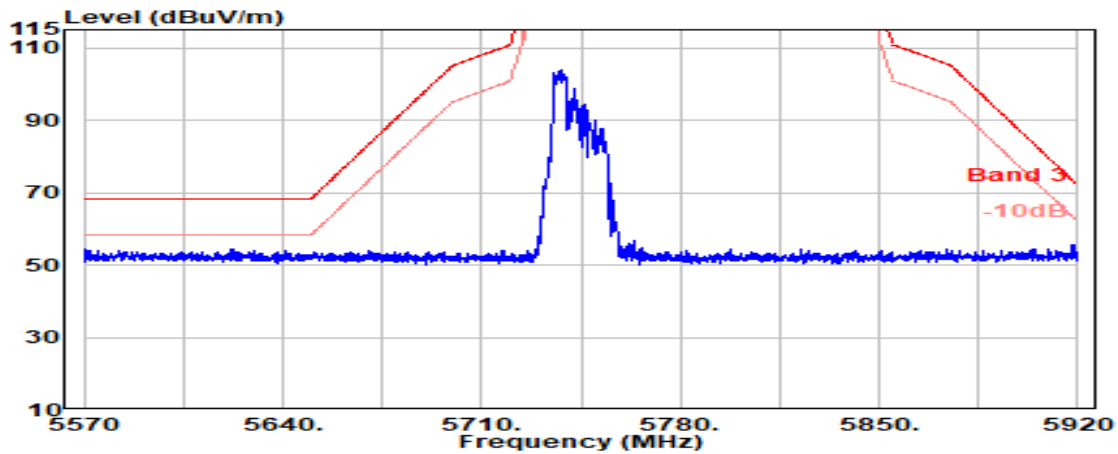


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

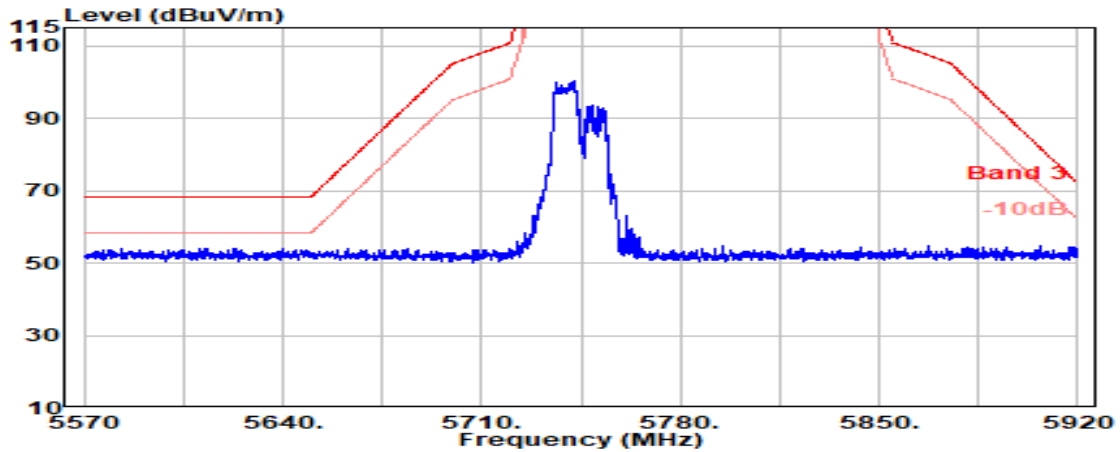


Antenna at Vertical Polarization

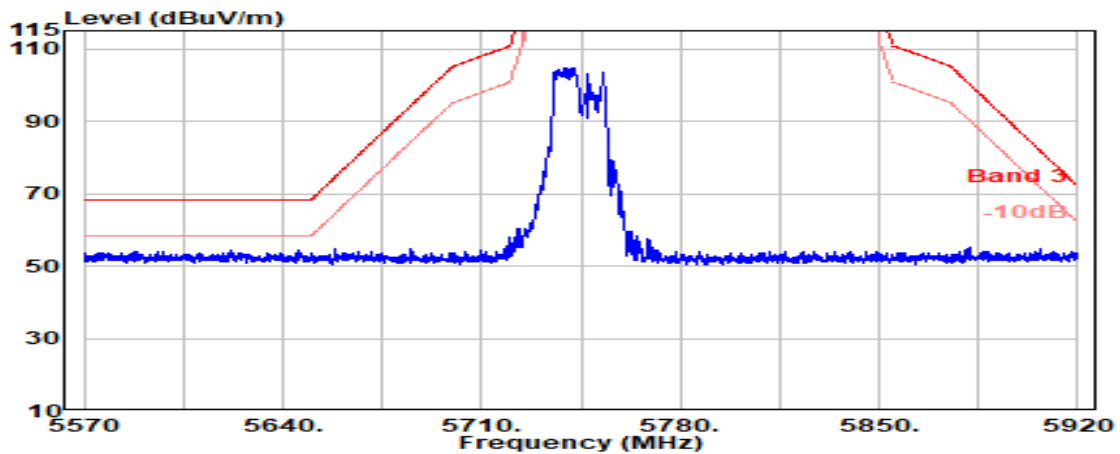


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

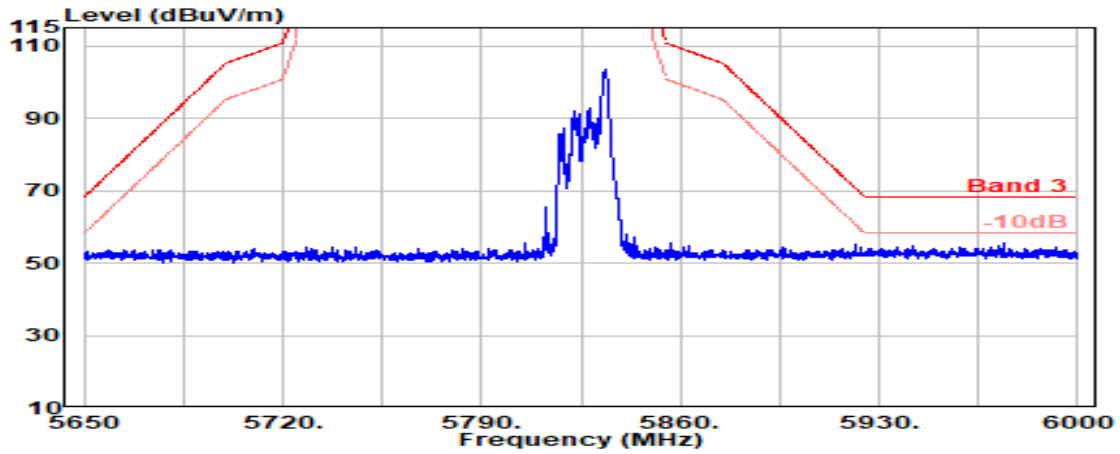


Antenna at Vertical Polarization

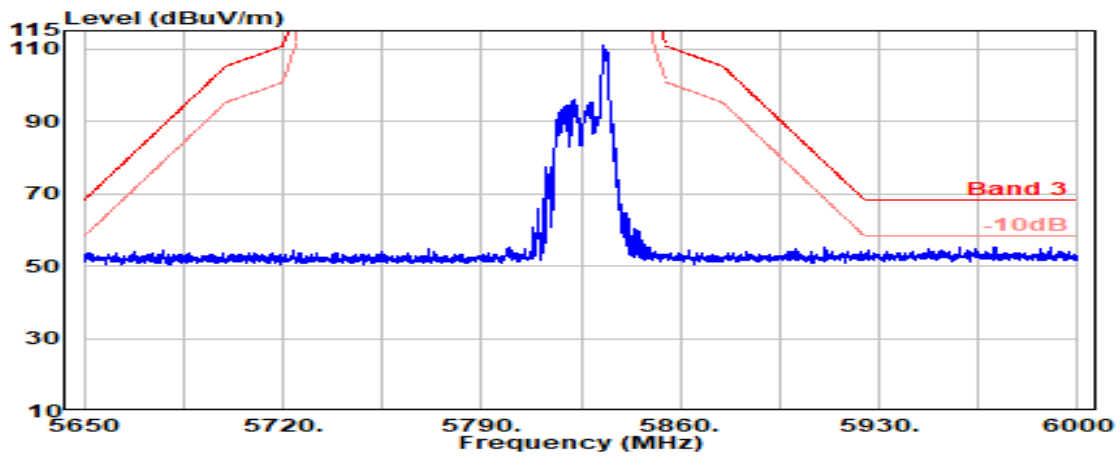


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

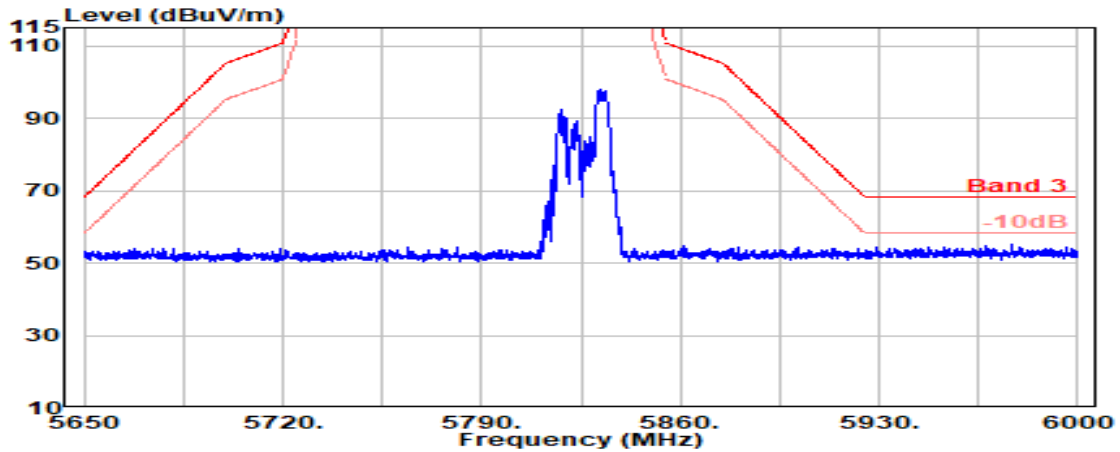


Antenna at Vertical Polarization

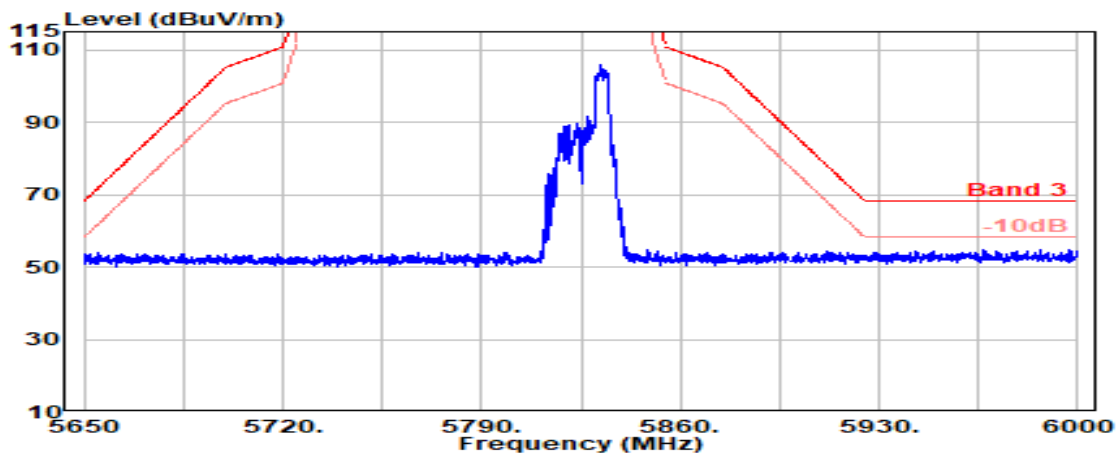


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

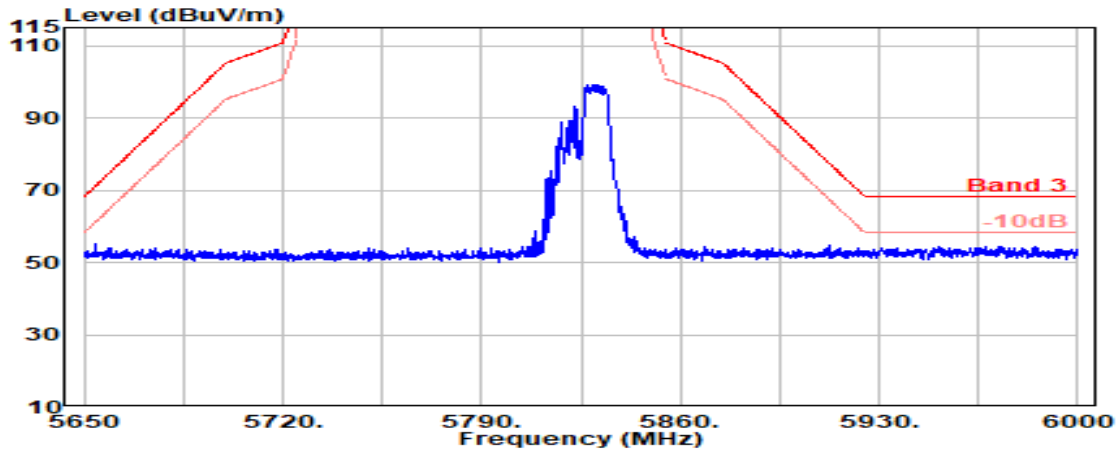

Antenna at Vertical Polarization

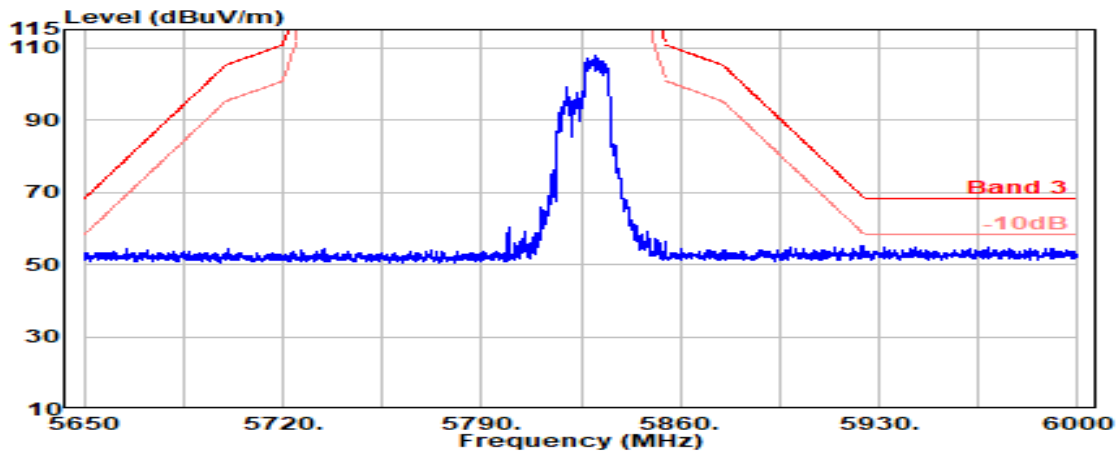


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

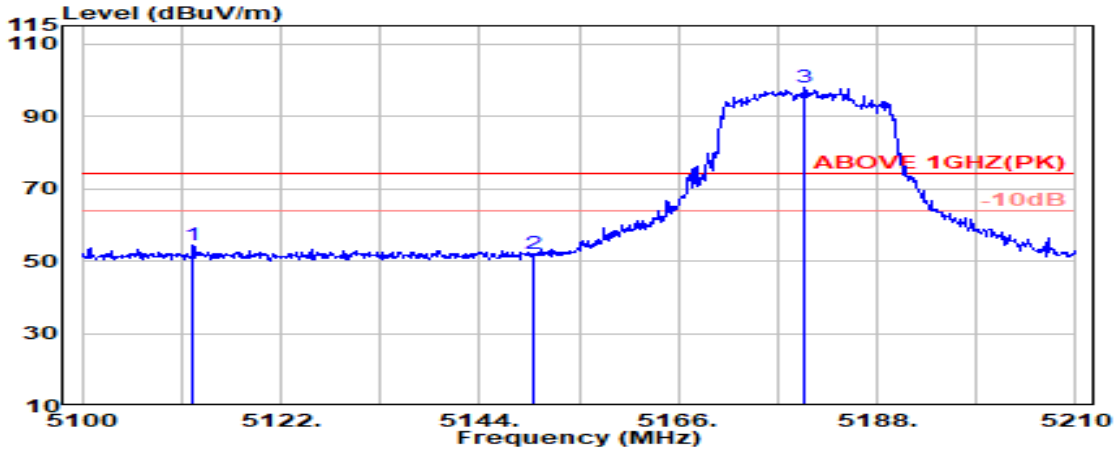

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.320	34.05	8.52	39.29	50.99	54.27	74.00	19.73	Peak
5150.000	34.20	8.54	39.29	48.40	51.86	74.00	22.14	Peak
@ 5179.970	34.26	8.56	39.29	94.46	97.99	---	---	Peak

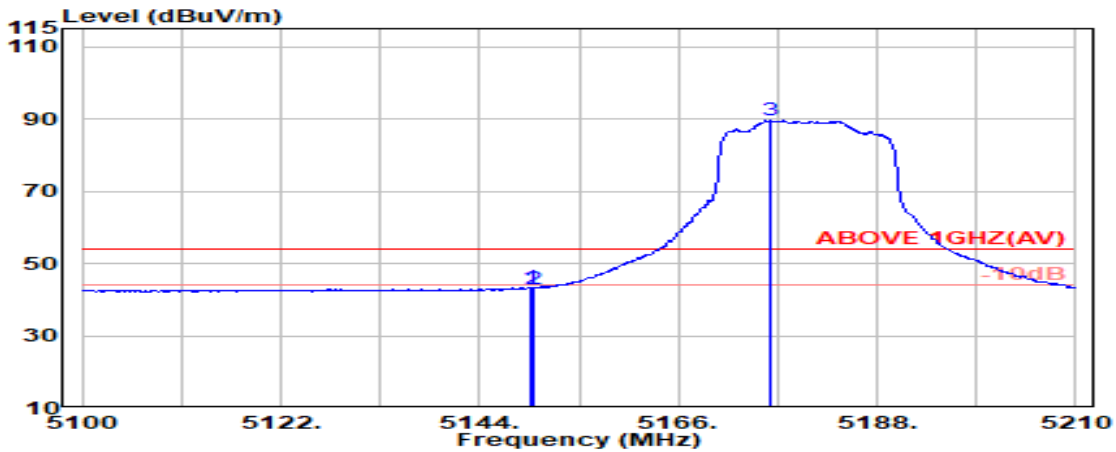


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.54	39.29	39.98	43.44	54.00	10.56	Average
5150.000	34.20	8.54	39.29	39.63	43.08	54.00	10.92	Average
@ 5176.230	34.25	8.56	39.29	86.12	89.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

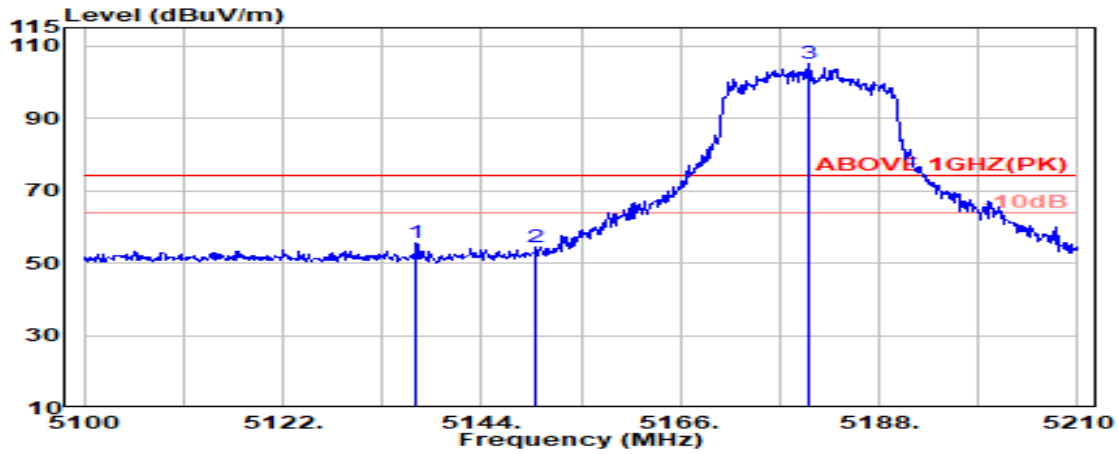

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.740	34.15	8.54	39.29	52.09	55.48	74.00	18.52	Peak
5150.000	34.20	8.54	39.29	51.09	54.54	74.00	19.46	Peak
@ 5180.190	34.26	8.56	39.29	101.46	105.00	---	---	Peak

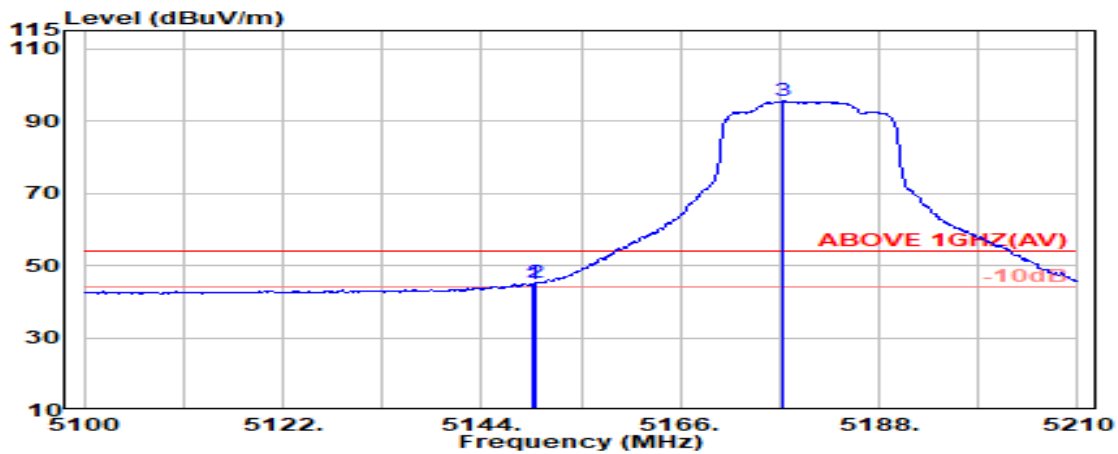


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.54	39.29	41.52	44.97	54.00	9.03	Average
5150.000	34.20	8.54	39.29	41.70	45.16	54.00	8.84	Average
@ 5177.220	34.25	8.56	39.29	91.91	95.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

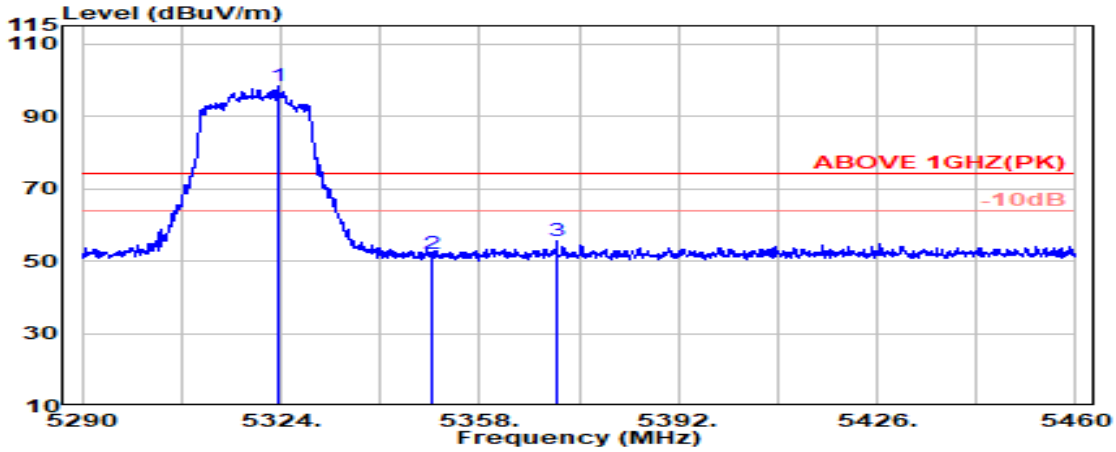

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	34.55	8.65	39.27	94.47	98.40	---	---	Peak
5350.000	34.50	8.67	39.27	47.92	51.82	74.00	22.18	Peak
5371.200	34.54	8.68	39.27	51.80	55.75	74.00	18.25	Peak

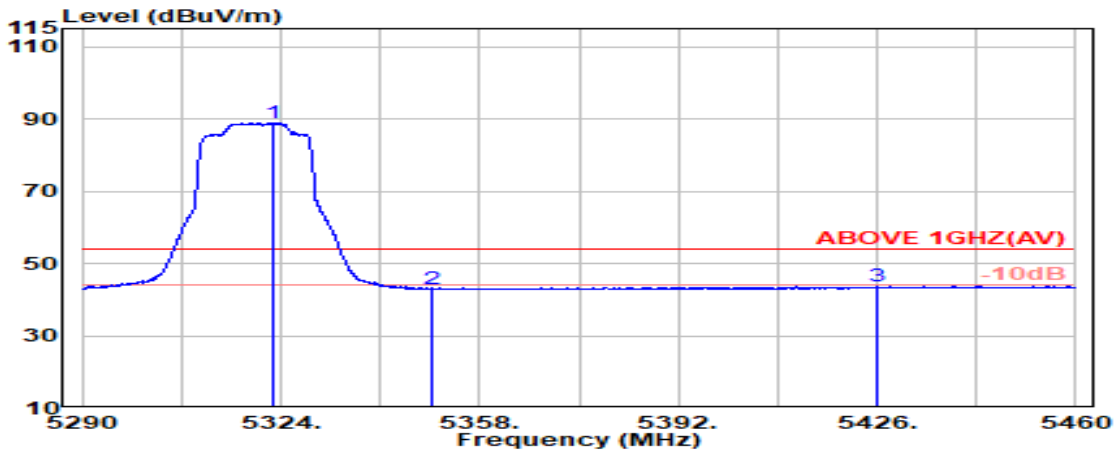


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.600	34.55	8.65	39.27	85.11	89.04	---	---	Average
5350.000	34.50	8.67	39.27	39.00	42.89	54.00	11.11	Average
5425.800	34.65	8.71	39.27	39.59	43.69	54.00	10.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

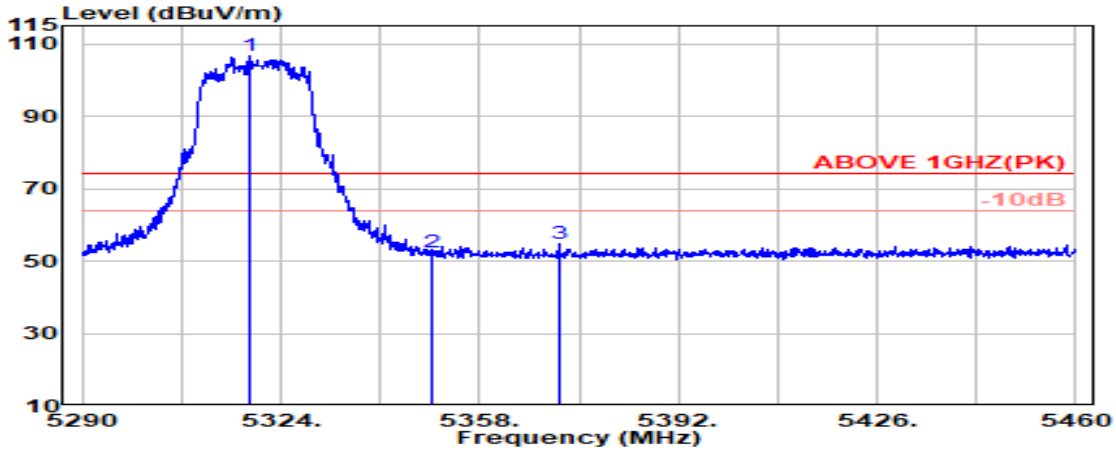

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.800	34.56	8.65	39.27	102.74	106.68	---	---	Peak
5350.000	34.50	8.67	39.27	48.51	52.40	74.00	21.60	Peak
5371.600	34.54	8.68	39.27	50.66	54.61	74.00	19.39	Peak

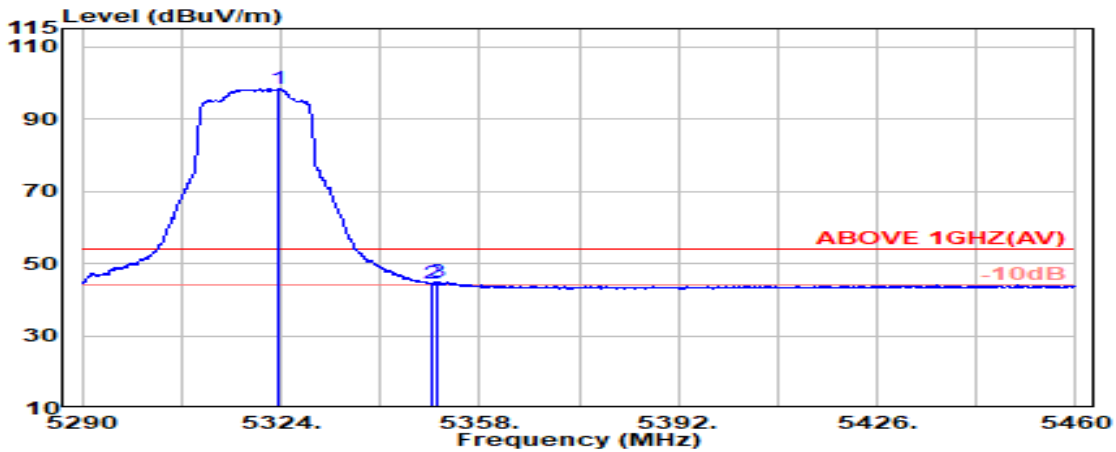


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.55	8.65	39.27	94.35	98.28	---	---	Average
5350.000	34.50	8.67	39.27	40.58	44.47	54.00	9.53	Average
5350.600	34.50	8.67	39.27	41.02	44.92	54.00	9.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

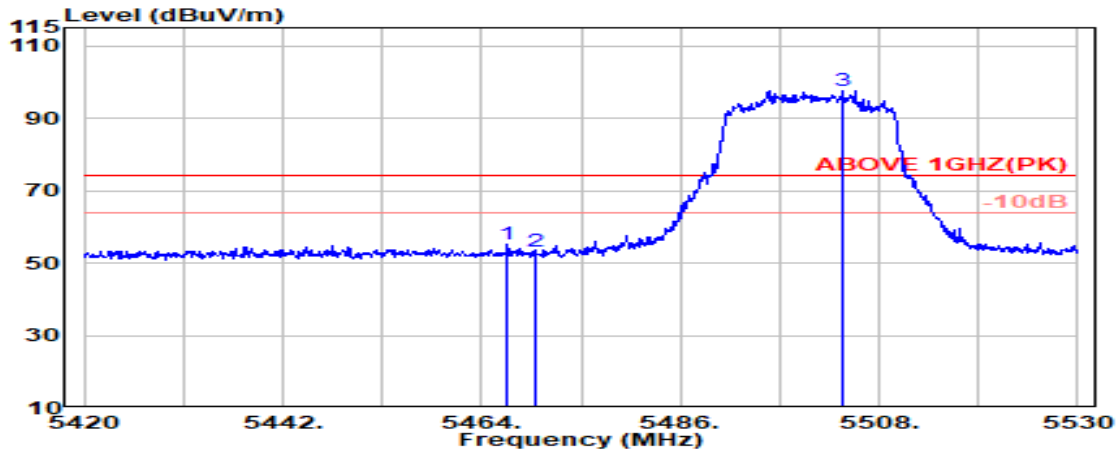

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.77	8.73	39.26	50.77	55.01	74.00	18.99	Peak
5470.000	34.78	8.74	39.26	49.05	53.30	74.00	20.70	Peak
@ 5504.100	34.89	8.76	39.26	93.02	97.41	---	---	Peak

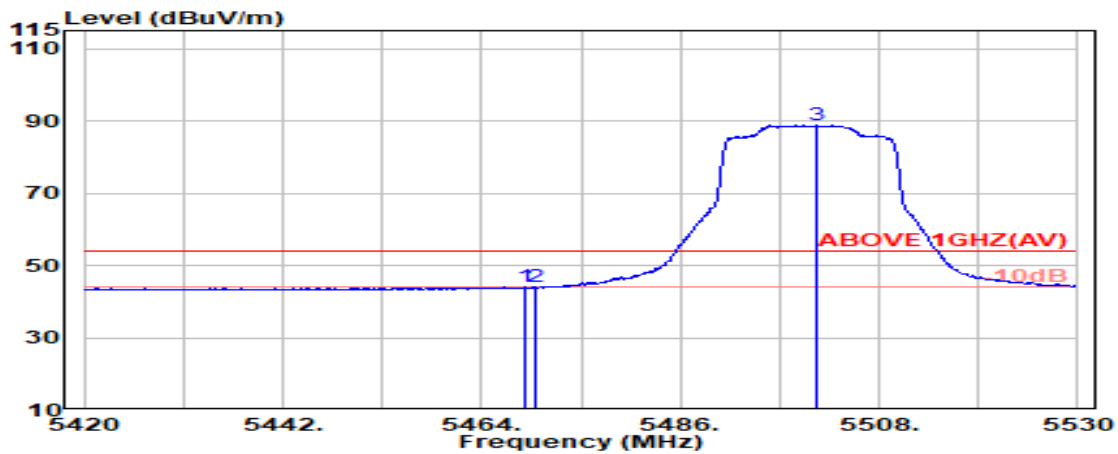


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.78	8.74	39.26	39.77	44.01	54.00	9.99	Average
5470.000	34.78	8.74	39.26	39.76	44.01	54.00	9.99	Average
@ 5501.200	34.90	8.75	39.26	84.38	88.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

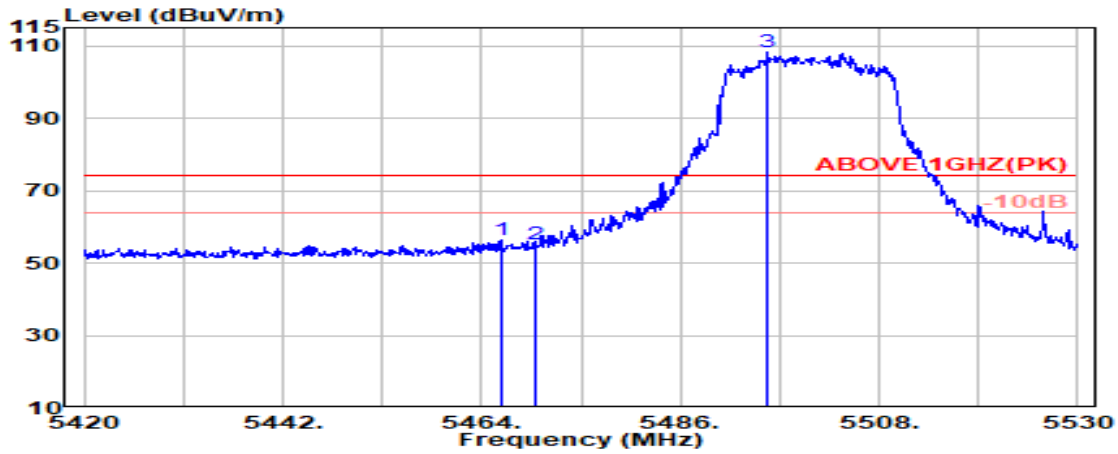

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.76	8.73	39.26	52.29	56.52	74.00	17.48	Peak
5470.000	34.78	8.74	39.26	50.87	55.12	74.00	18.88	Peak
@ 5495.700	34.88	8.75	39.26	103.69	108.07	---	---	Peak

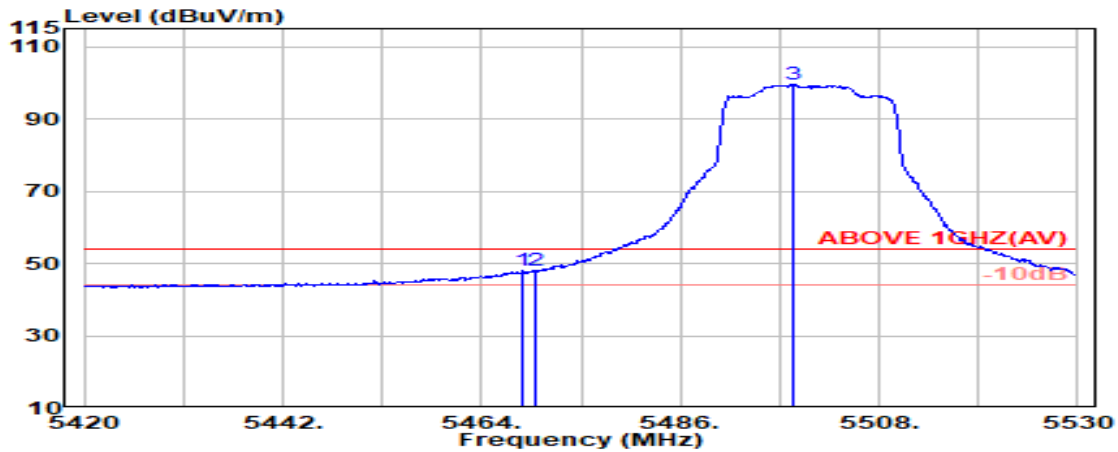


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.77	8.73	39.26	43.93	48.17	54.00	5.83	Average
5470.000	34.78	8.74	39.26	43.73	47.98	54.00	6.02	Average
@ 5498.400	34.89	8.75	39.26	95.29	99.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

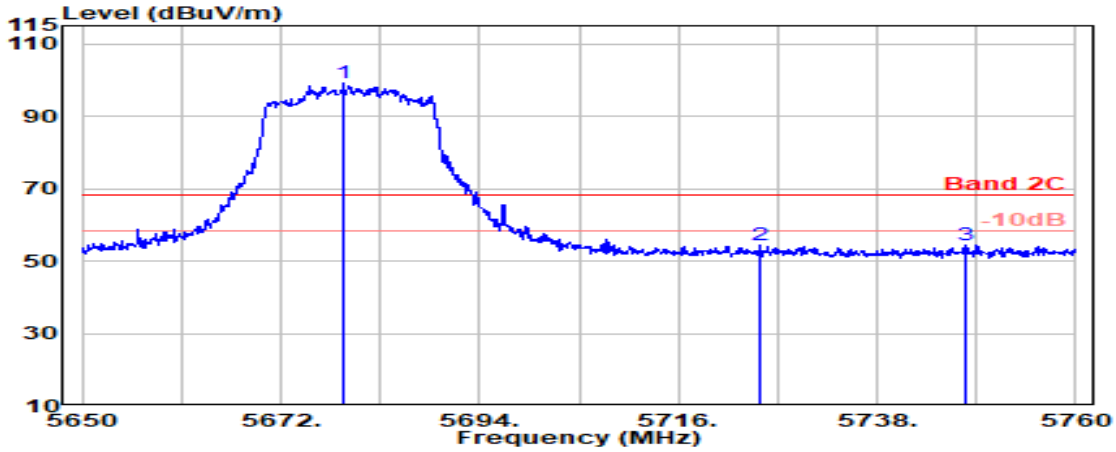

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.900	34.48	8.86	39.30	95.16	99.21	---	---	Peak
5725.000	34.45	8.88	39.31	50.35	54.38	68.20	13.82	Peak
5747.800	34.50	8.89	39.31	50.49	54.56	68.20	13.64	Peak

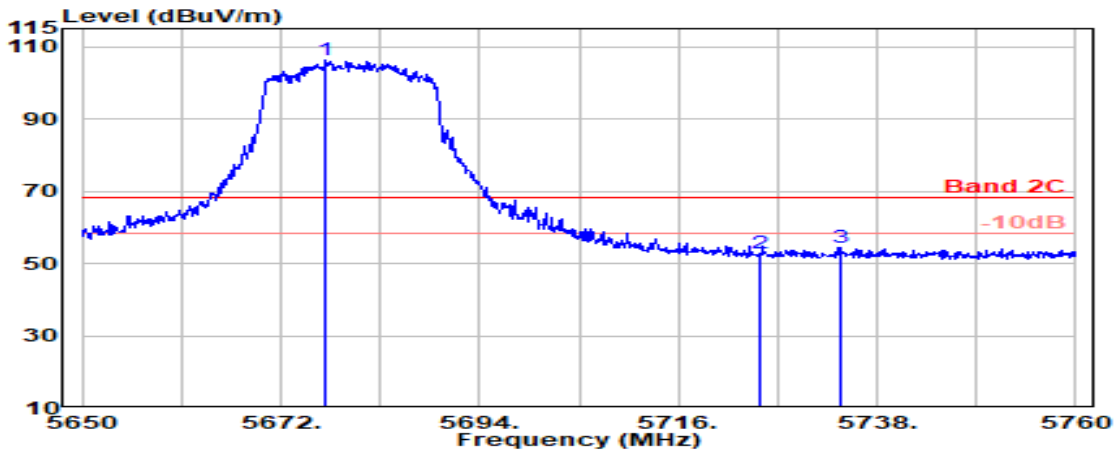


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.900	34.49	8.85	39.30	102.05	106.10	---	---	Peak
5725.000	34.45	8.88	39.31	48.81	52.83	68.20	15.37	Peak
5734.000	34.47	8.89	39.31	50.34	54.38	68.20	13.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

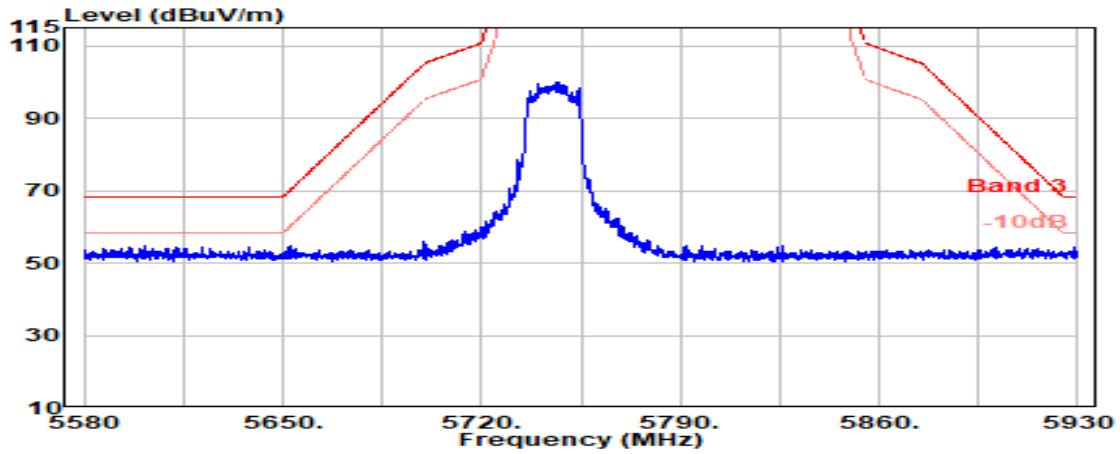


Antenna at Vertical Polarization

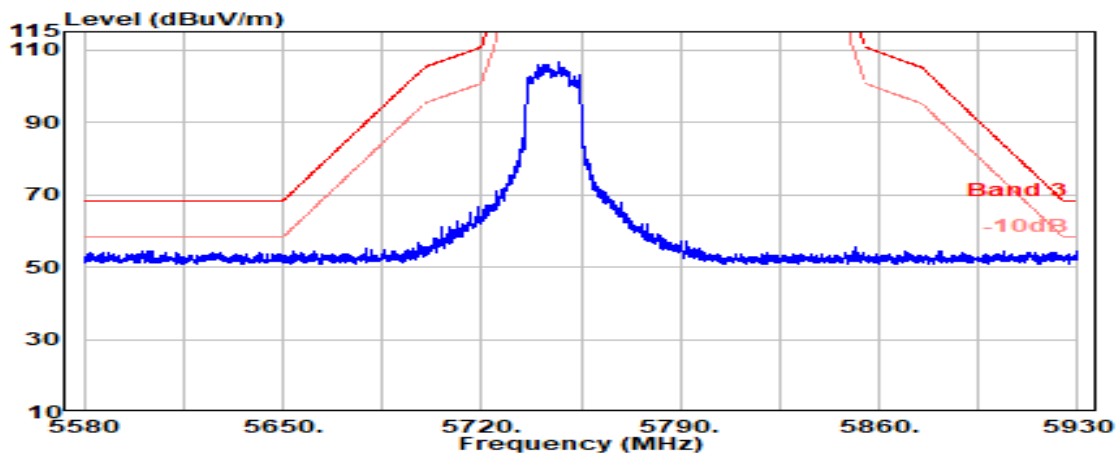


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

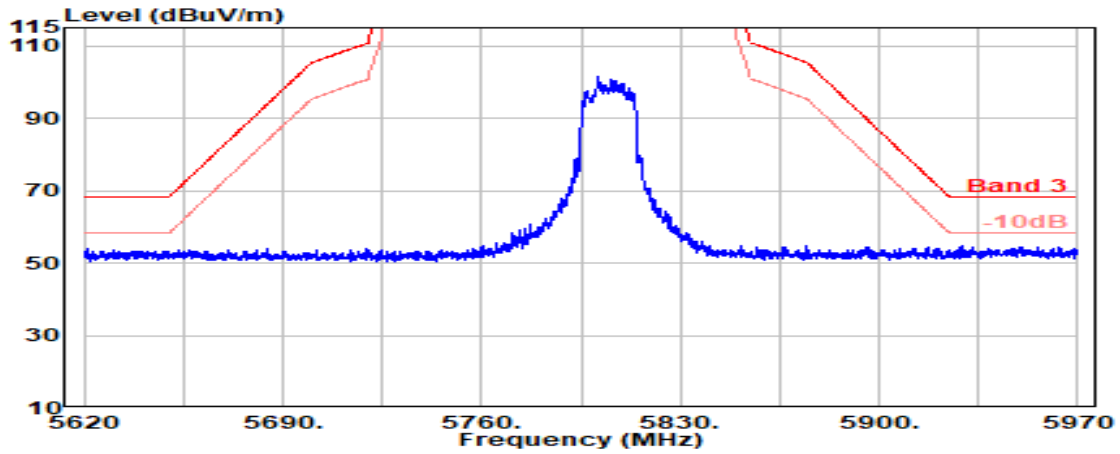

Antenna at Vertical Polarization

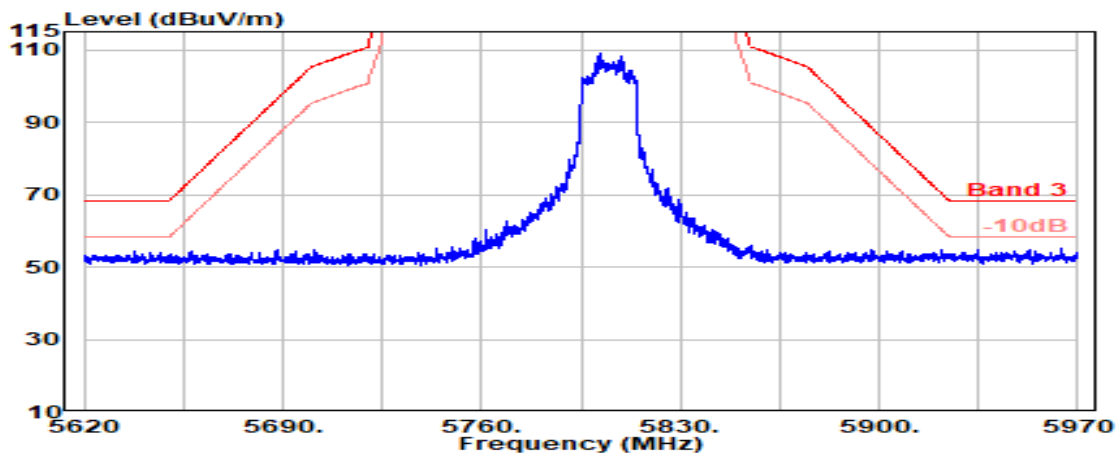


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

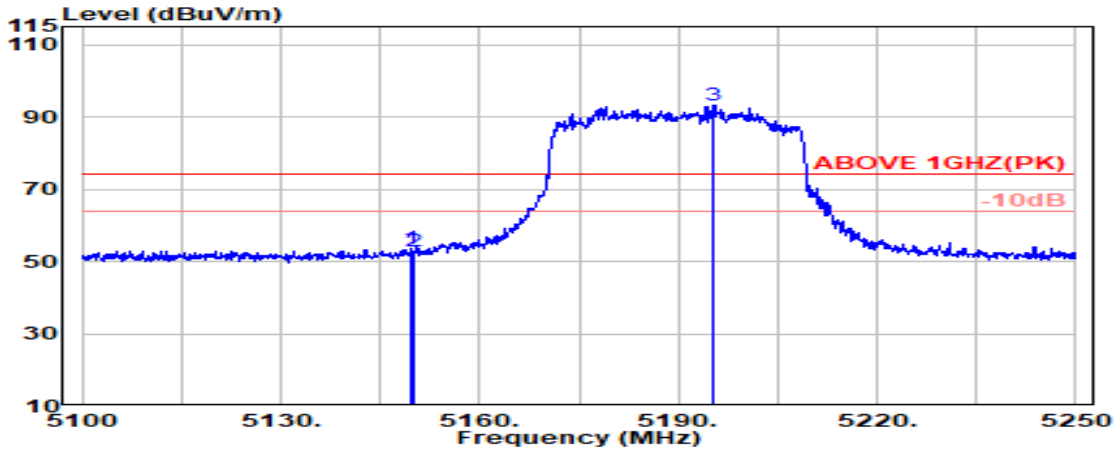

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.29	50.02	53.47	74.00	20.53	Peak
5150.000	34.20	8.54	39.29	49.49	52.94	74.00	21.06	Peak
@ 5195.400	34.29	8.57	39.28	89.63	93.21	---	---	Peak

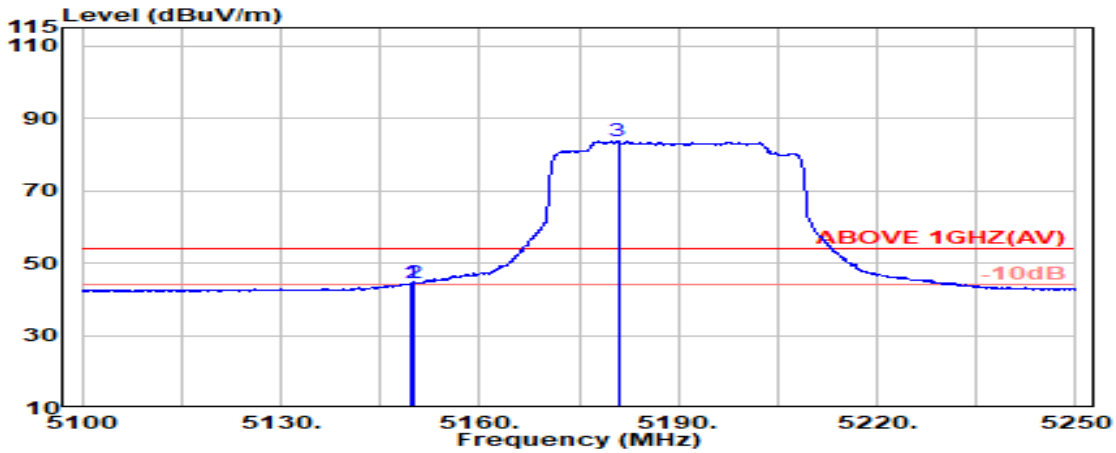


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.54	39.29	40.90	44.35	54.00	9.65	Average
5150.000	34.20	8.54	39.29	40.88	44.34	54.00	9.66	Average
@ 5180.900	34.26	8.56	39.29	80.13	83.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

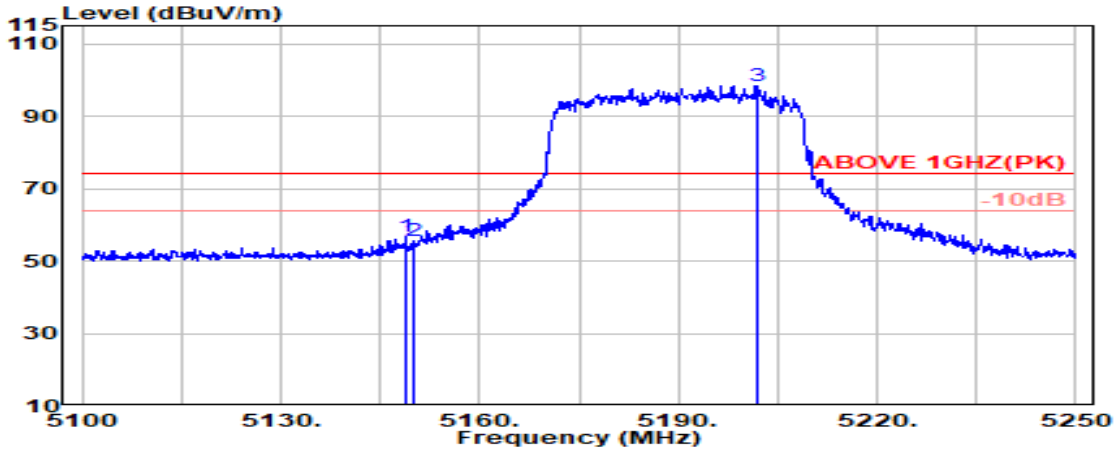

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.20	8.54	39.29	53.43	56.88	74.00	17.12	Peak
5150.000	34.20	8.54	39.29	52.19	55.65	74.00	18.35	Peak
@ 5201.800	34.30	8.58	39.28	94.78	98.38	---	---	Peak

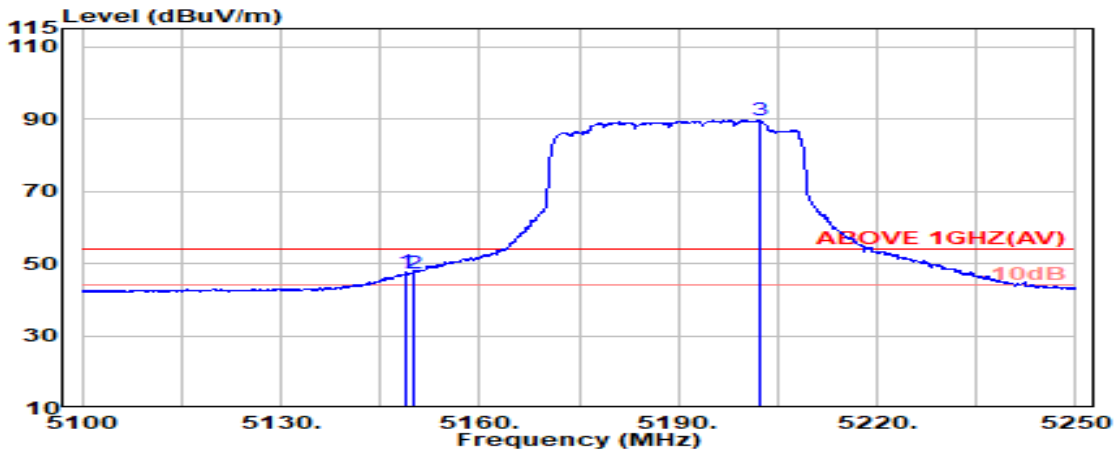

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.20	8.54	39.29	44.14	47.59	54.00	6.41	Average
5150.000	34.20	8.54	39.29	43.86	47.31	54.00	6.69	Average
@ 5202.200	34.30	8.58	39.28	86.15	89.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

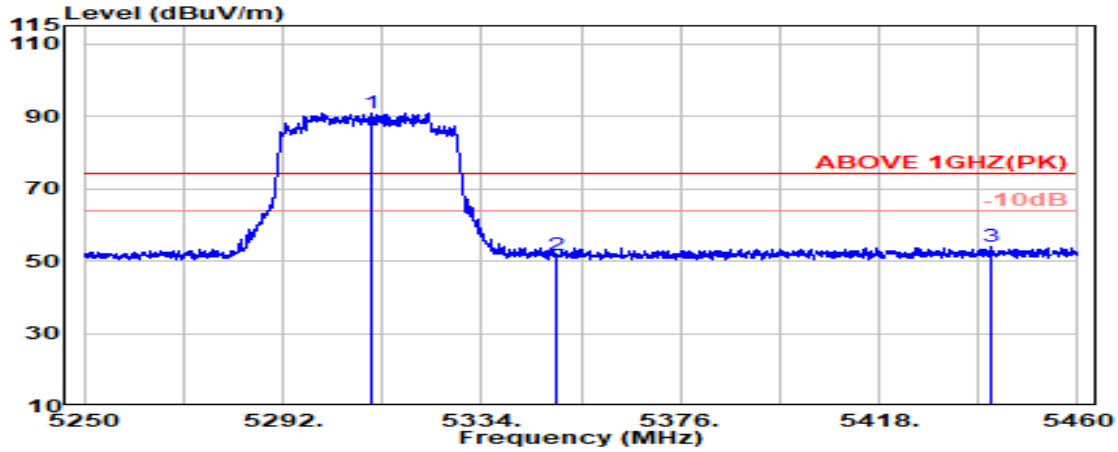

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.600	34.58	8.64	39.27	87.05	91.00	---	---	Peak
5350.000	34.50	8.67	39.27	47.79	51.68	74.00	22.32	Peak
5441.500	34.68	8.72	39.26	49.96	54.10	74.00	19.90	Peak

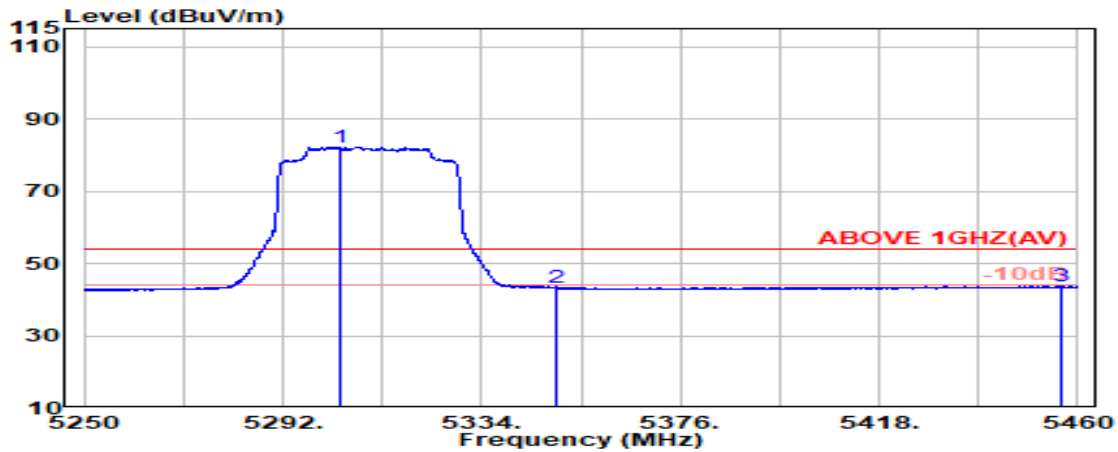


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.100	34.59	8.64	39.28	78.16	82.11	---	---	Average
5350.000	34.50	8.67	39.27	39.31	43.21	54.00	10.79	Average
5456.600	34.73	8.73	39.26	39.60	43.79	54.00	10.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

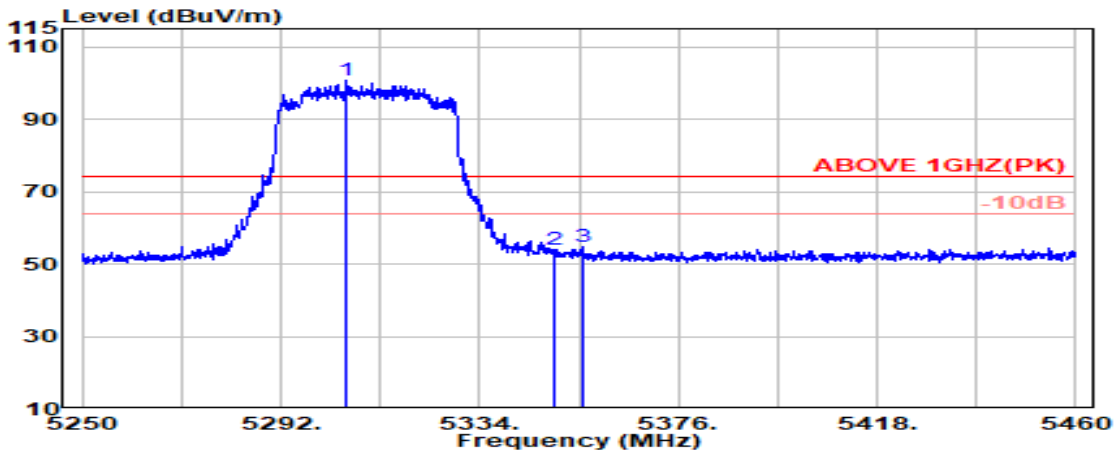

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.900	34.59	8.64	39.28	96.98	100.93	---	---	Peak
5350.000	34.50	8.67	39.27	49.95	53.84	74.00	20.16	Peak
5355.800	34.51	8.67	39.27	50.96	54.87	74.00	19.13	Peak

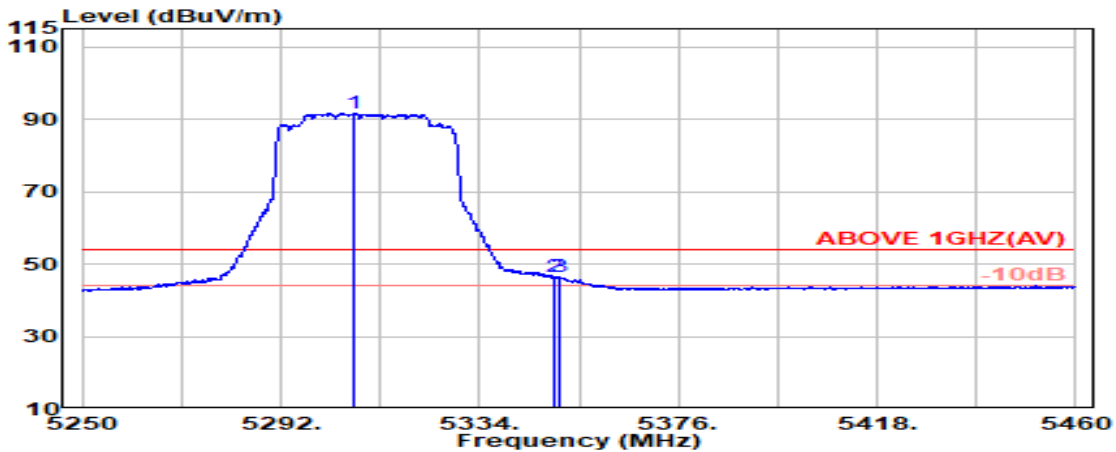


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.200	34.59	8.64	39.27	87.83	91.78	---	---	Average
5350.000	34.50	8.67	39.27	42.49	46.39	54.00	7.61	Average
5351.000	34.50	8.67	39.27	42.48	46.38	54.00	7.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

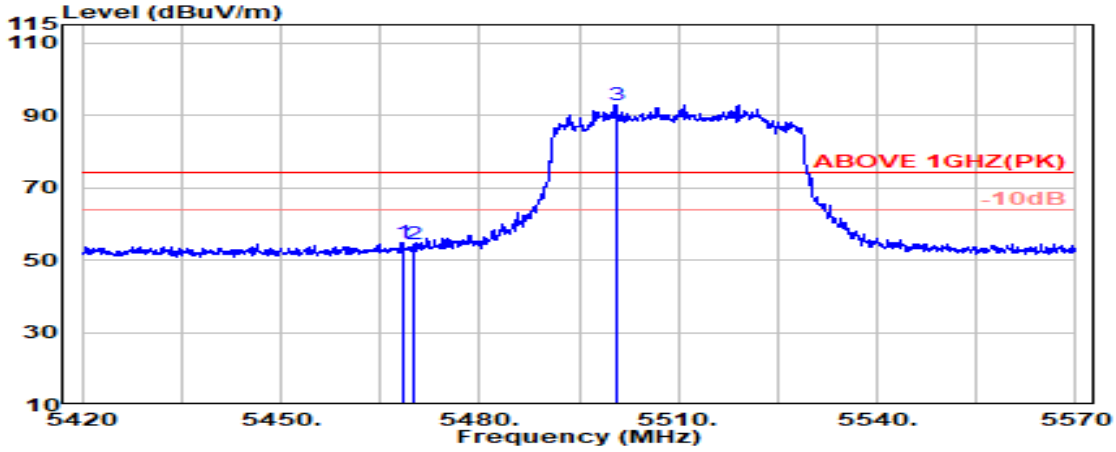

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.77	8.73	39.26	50.38	54.63	74.00	19.37	Peak
5470.000	34.78	8.74	39.26	50.26	54.51	74.00	19.49	Peak
@ 5500.600	34.90	8.75	39.26	88.54	92.94	---	---	Peak

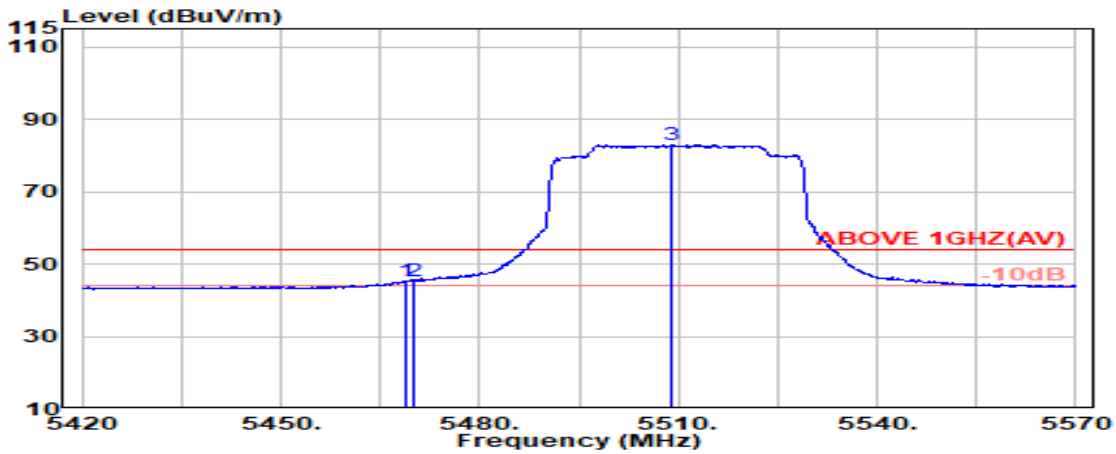


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.78	8.74	39.26	41.04	45.29	54.00	8.71	Average
5470.000	34.78	8.74	39.26	40.94	45.19	54.00	8.81	Average
@ 5509.000	34.88	8.76	39.26	78.67	83.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

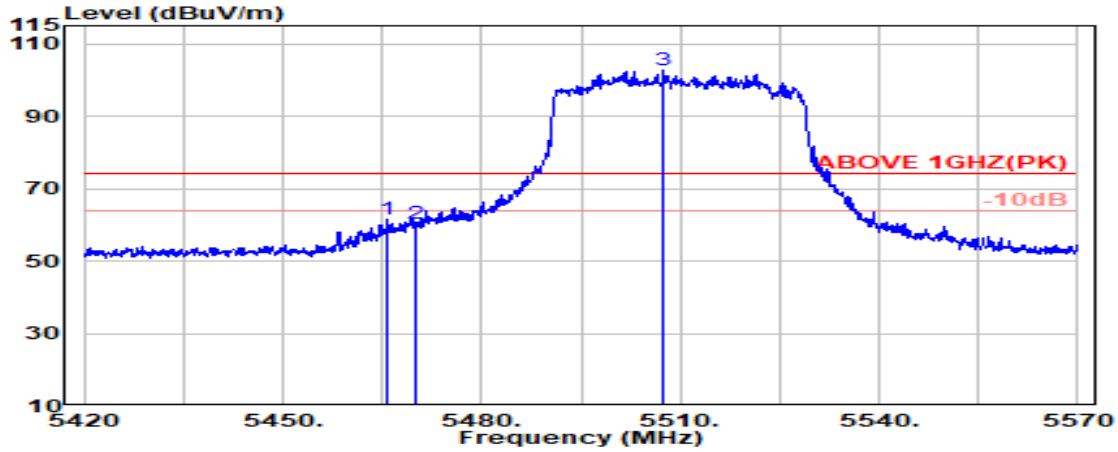

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.76	8.73	39.26	57.30	61.53	74.00	12.47	Peak
5470.000	34.78	8.74	39.26	56.10	60.36	74.00	13.64	Peak
@ 5507.400	34.89	8.76	39.26	98.44	102.82	---	---	Peak

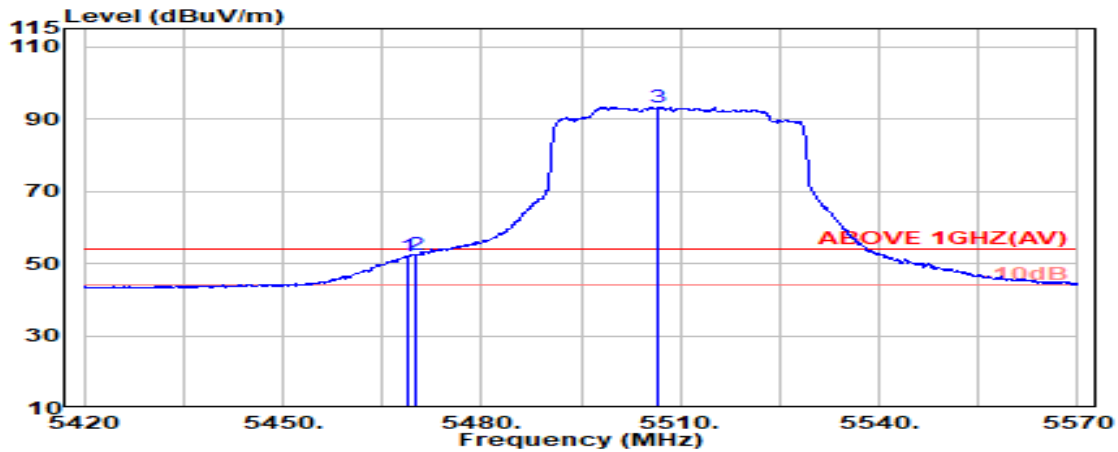


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.78	8.74	39.26	47.83	52.07	54.00	1.93	Average
5470.000	34.78	8.74	39.26	48.05	52.30	54.00	1.70	Average
@ 5506.500	34.89	8.76	39.26	89.02	93.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

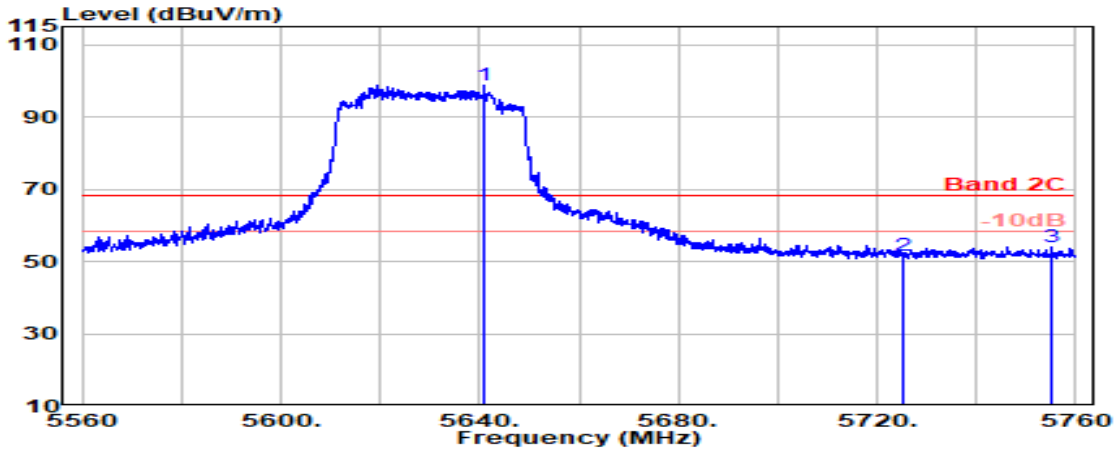

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5640.800	34.62	8.83	39.29	94.77	98.93	---	---	Peak
5725.000	34.45	8.88	39.31	47.43	51.46	68.20	16.74	Peak
5755.000	34.51	8.90	39.31	50.04	54.14	68.20	14.06	Peak

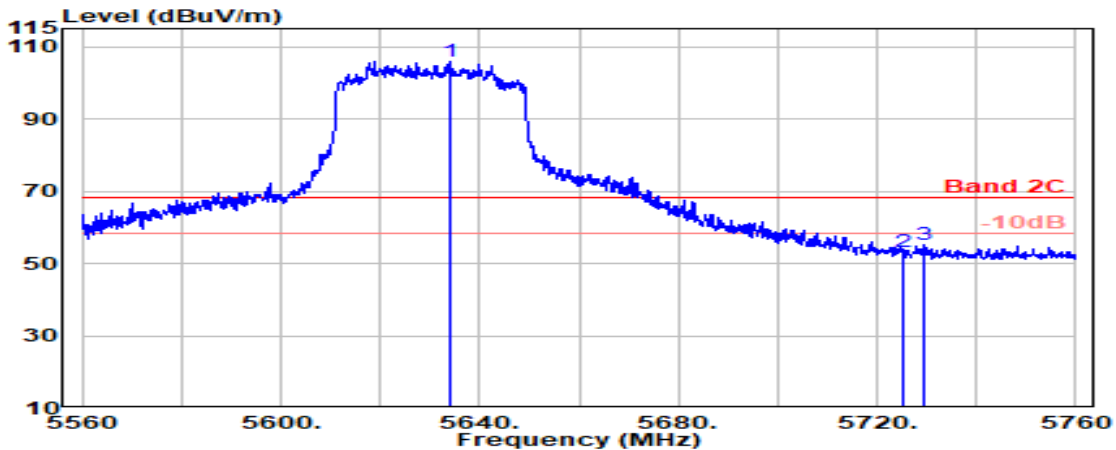


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5633.900	34.63	8.83	39.29	101.80	105.98	---	---	Peak
5725.000	34.45	8.88	39.31	49.32	53.34	68.20	14.86	Peak
5729.600	34.46	8.88	39.31	51.12	55.15	68.20	13.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

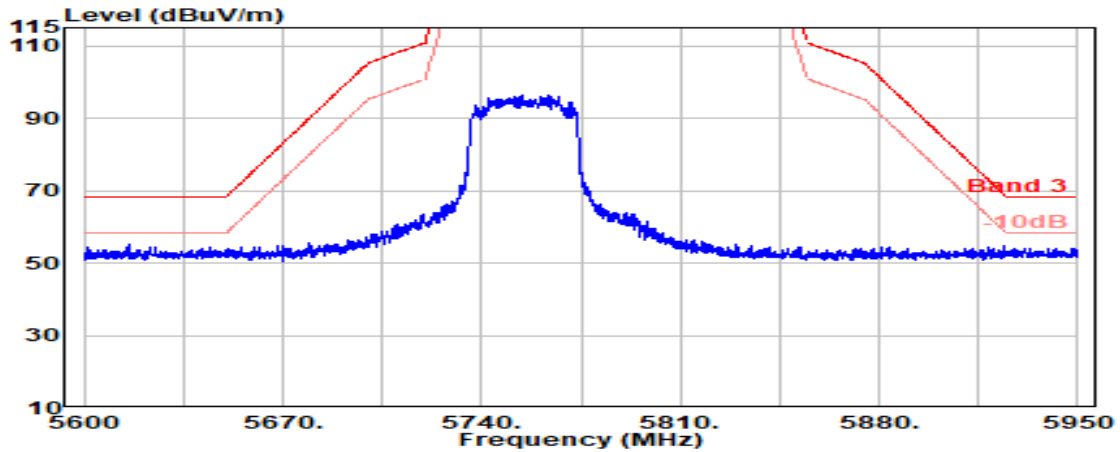


Antenna at Vertical Polarization

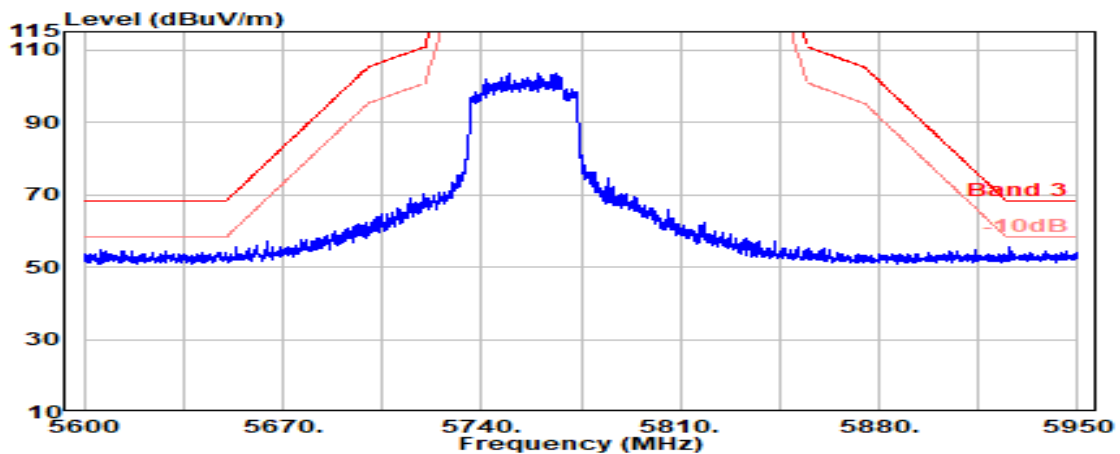


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

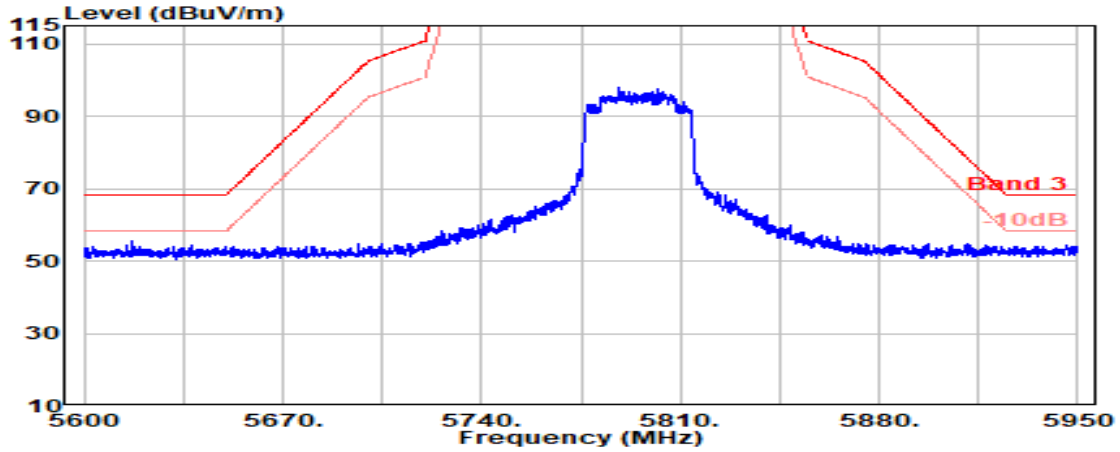

Antenna at Vertical Polarization

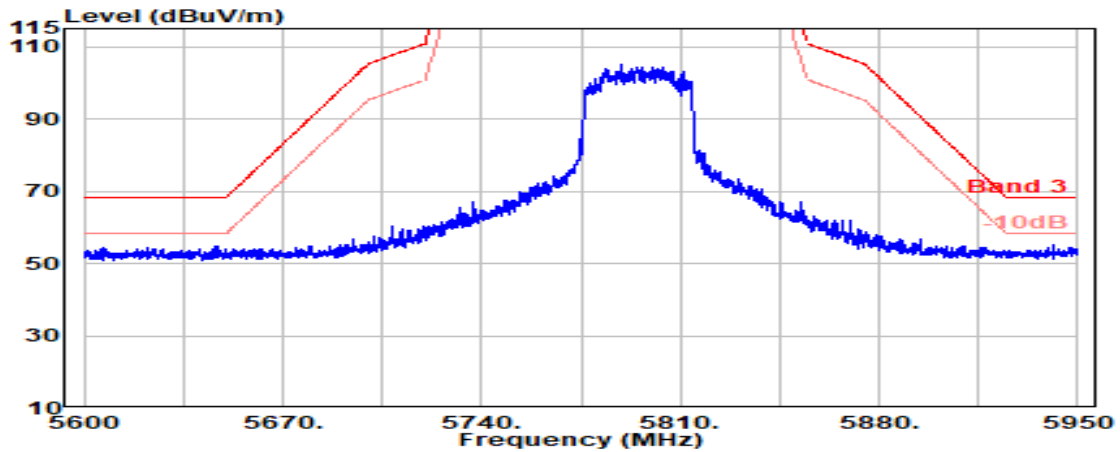


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

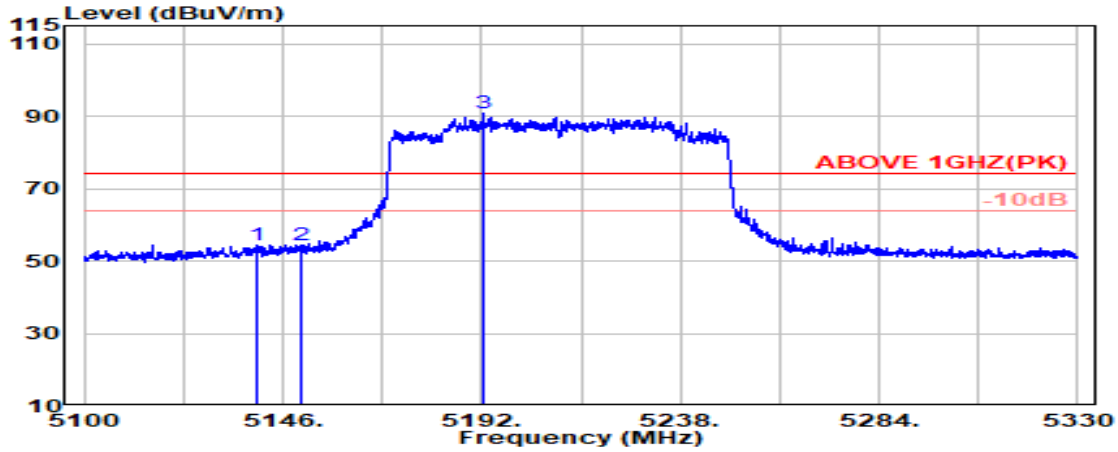

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.100	34.16	8.54	39.29	51.06	54.47	74.00	19.53	Peak
5150.000	34.20	8.54	39.29	51.00	54.46	74.00	19.54	Peak
@ 5192.300	34.28	8.57	39.28	87.07	90.64	---	---	Peak

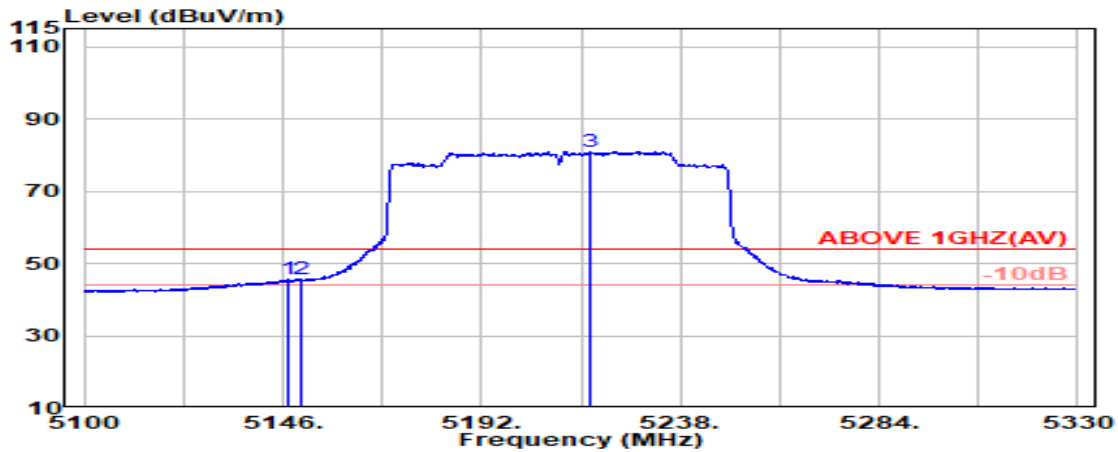


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	34.19	8.54	39.29	42.15	45.60	54.00	8.40	Average
5150.000	34.20	8.54	39.29	42.10	45.56	54.00	8.44	Average
@ 5217.300	34.33	8.59	39.28	77.42	81.06	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

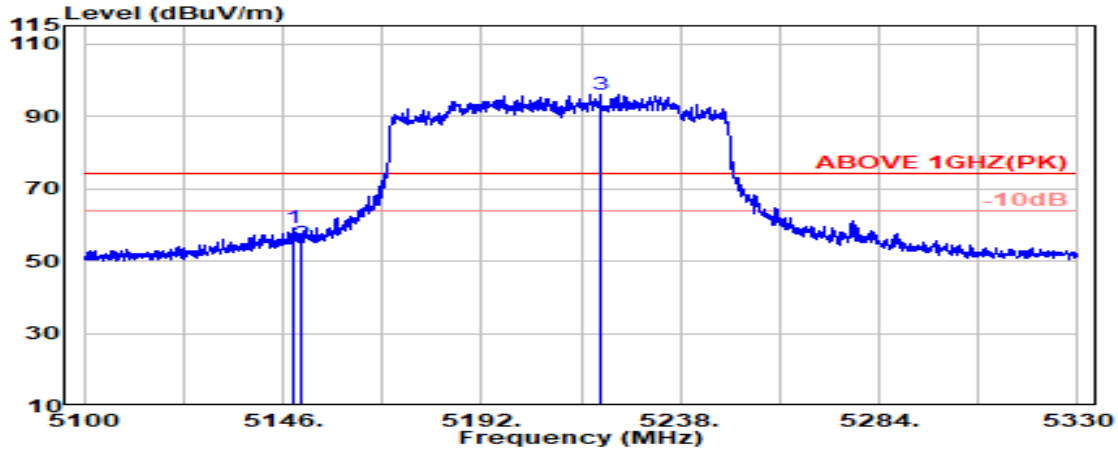

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.19	8.54	39.29	55.52	58.97	74.00	15.03	Peak
5150.000	34.20	8.54	39.29	51.30	54.76	74.00	19.24	Peak
@ 5219.600	34.34	8.59	39.28	92.45	96.09	---	---	Peak

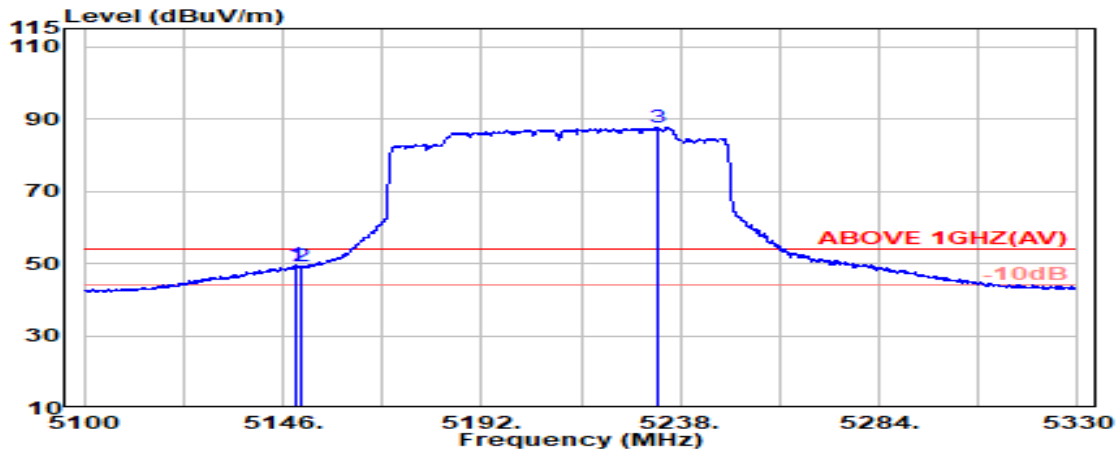


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.20	8.54	39.29	46.15	49.60	54.00	4.40	Average
5150.000	34.20	8.54	39.29	45.58	49.03	54.00	4.97	Average
@ 5232.700	34.37	8.59	39.28	84.10	87.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

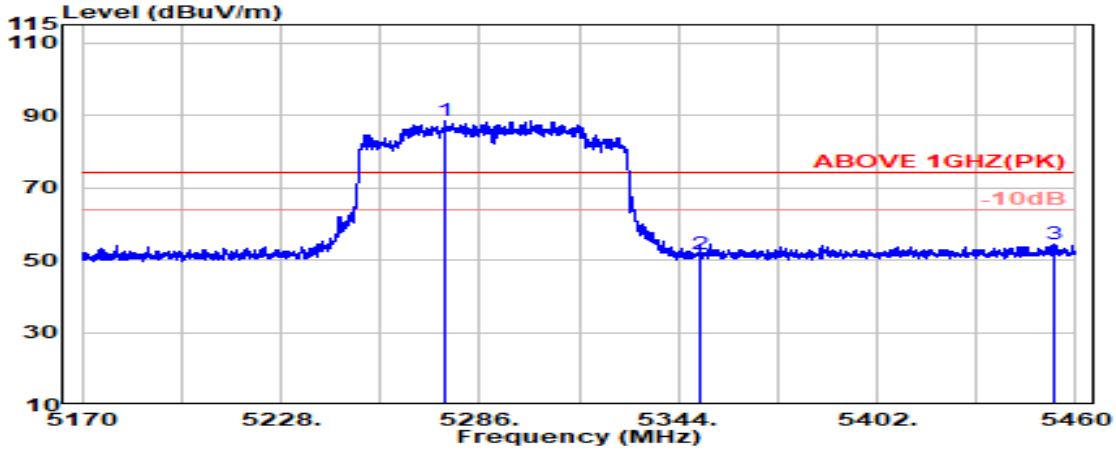

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.000	34.50	8.62	39.28	84.69	88.54	---	---	Peak
5350.000	34.50	8.67	39.27	47.65	51.55	74.00	22.45	Peak
5454.000	34.72	8.73	39.26	50.20	54.38	74.00	19.62	Peak

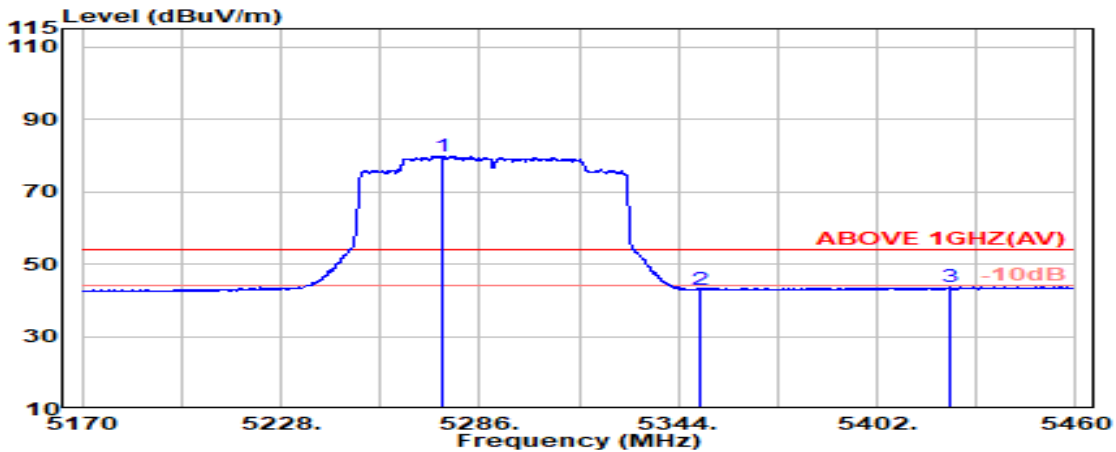


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.200	34.50	8.62	39.28	76.04	79.89	---	---	Average
5350.000	34.50	8.67	39.27	39.11	43.00	54.00	11.00	Average
5423.300	34.65	8.71	39.27	39.52	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

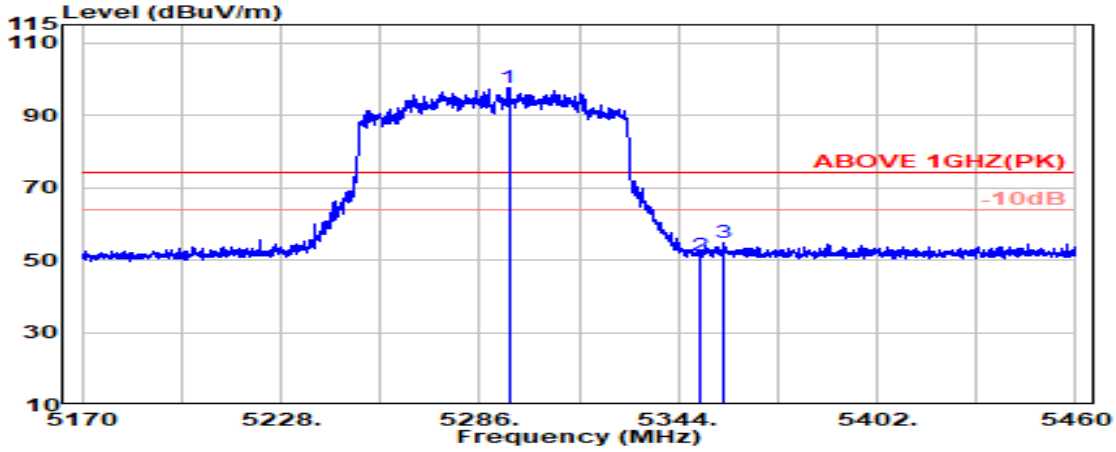

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.500	34.58	8.63	39.28	93.73	97.67	---	---	Peak
5350.000	34.50	8.67	39.27	47.43	51.32	74.00	22.68	Peak
5357.300	34.51	8.67	39.27	50.81	54.73	74.00	19.27	Peak

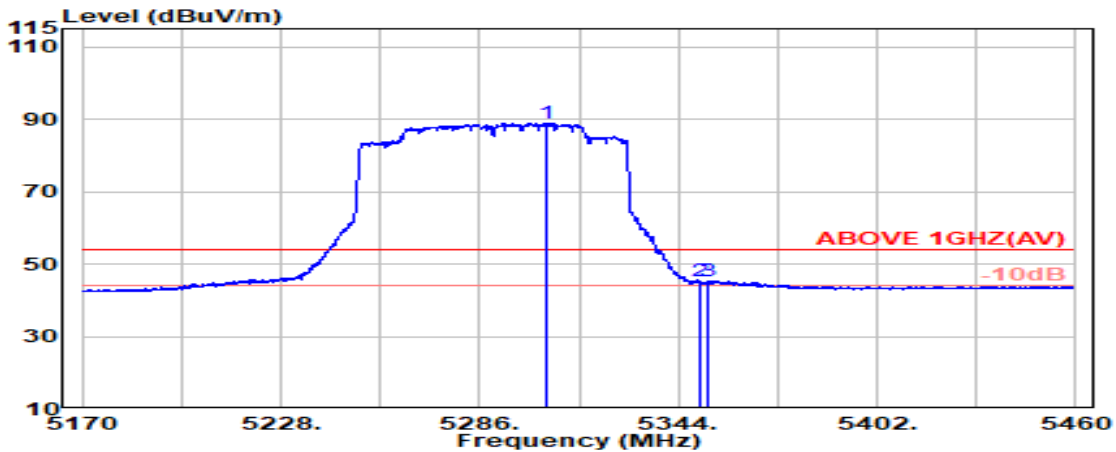

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.200	34.59	8.64	39.28	85.09	89.04	---	---	Average
5350.000	34.50	8.67	39.27	41.24	45.13	54.00	8.87	Average
5352.700	34.51	8.67	39.27	41.35	45.25	54.00	8.75	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

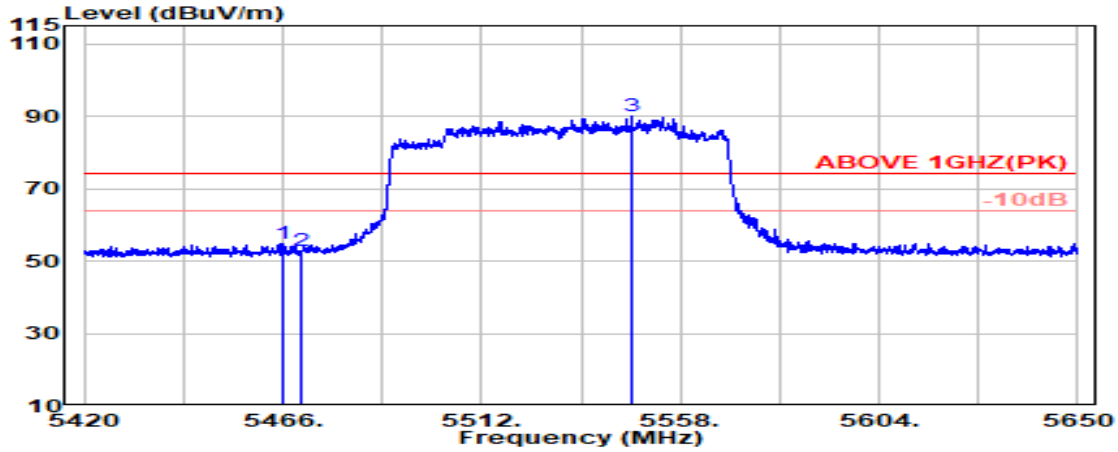

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.76	8.73	39.26	50.63	54.86	74.00	19.14	Peak
5470.000	34.78	8.74	39.26	48.65	52.90	74.00	21.10	Peak
@ 5546.600	34.81	8.78	39.27	85.88	90.20	---	---	Peak

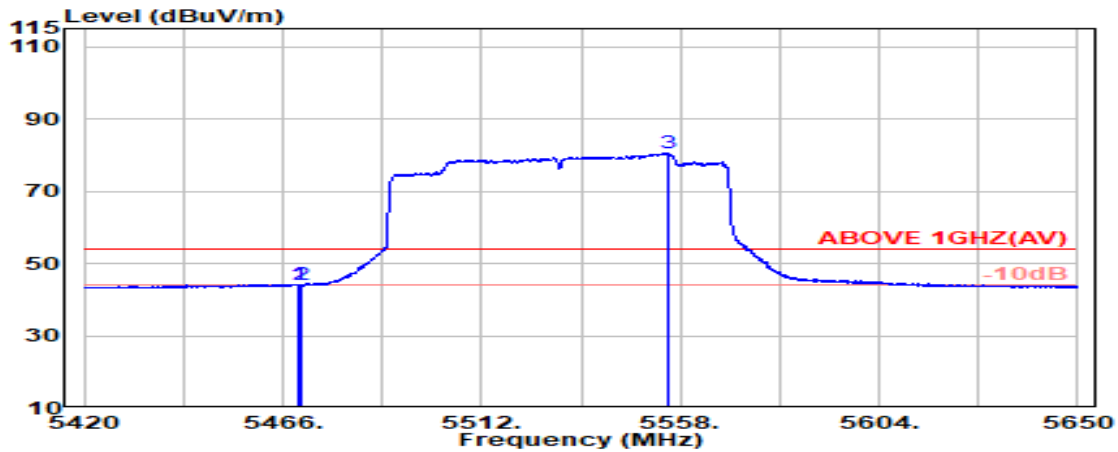


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.78	8.74	39.26	40.01	44.26	54.00	9.74	Average
5470.000	34.78	8.74	39.26	39.78	44.03	54.00	9.97	Average
@ 5555.400	34.79	8.79	39.27	76.24	80.54	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

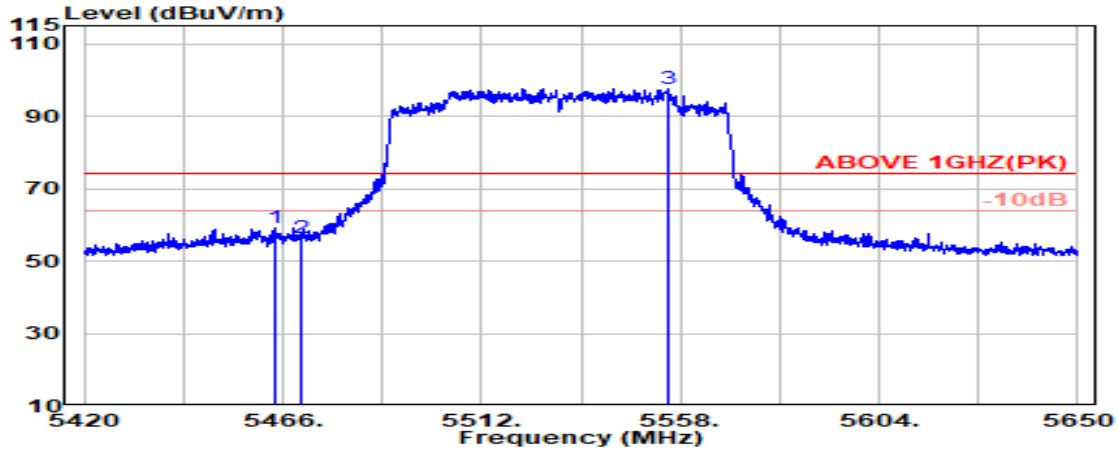

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.76	8.73	39.26	54.99	59.22	74.00	14.78	Peak
5470.000	34.78	8.74	39.26	52.21	56.46	74.00	17.54	Peak
@ 5555.100	34.79	8.78	39.27	93.36	97.67	---	---	Peak

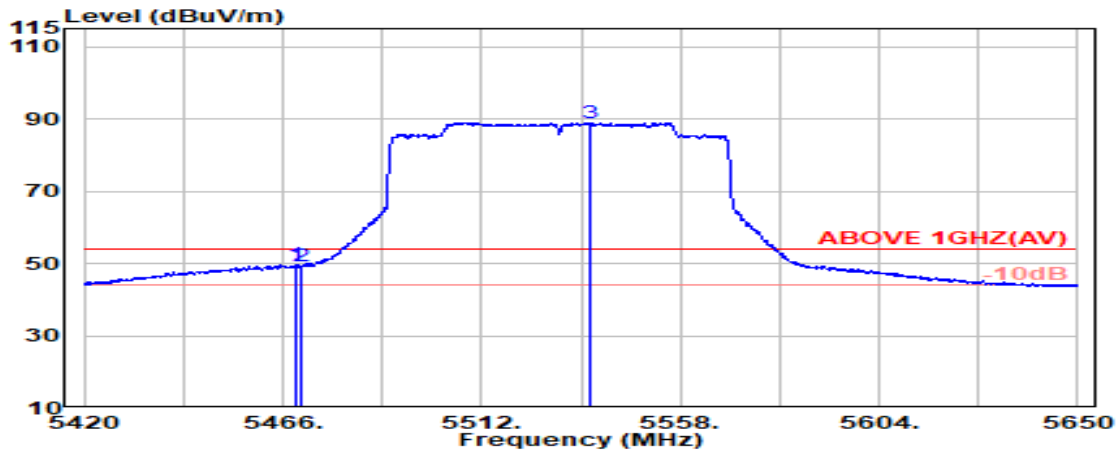


Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.100	34.78	8.74	39.26	45.41	49.66	54.00	4.34	Average
5470.000	34.78	8.74	39.26	44.93	49.19	54.00	4.81	Average
@ 5537.100	34.83	8.77	39.27	84.70	89.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

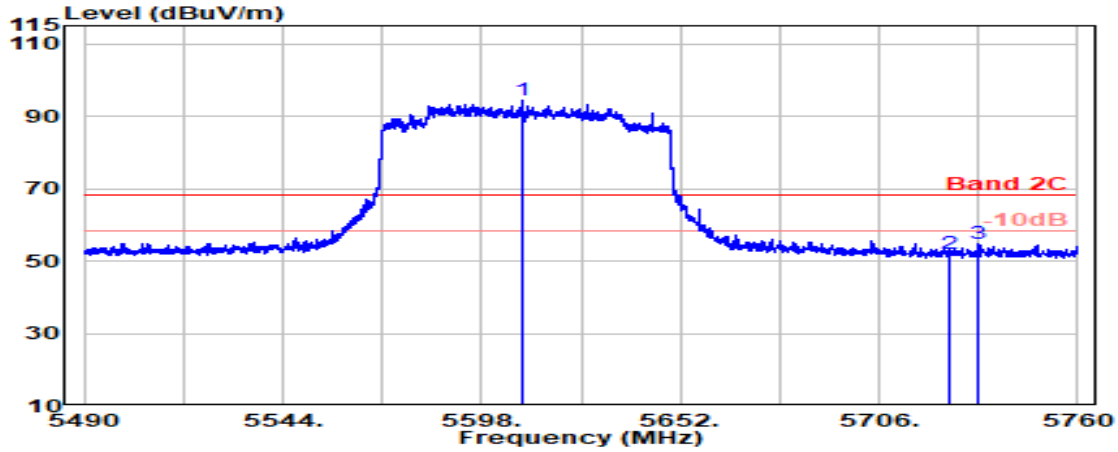
Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5609.100	34.68	8.82	39.28	90.09	94.31	---	---	Peak
5725.000	34.45	8.88	39.31	48.17	52.19	68.20	16.01	Peak
5733.200	34.47	8.89	39.31	50.71	54.75	68.20	13.45	Peak

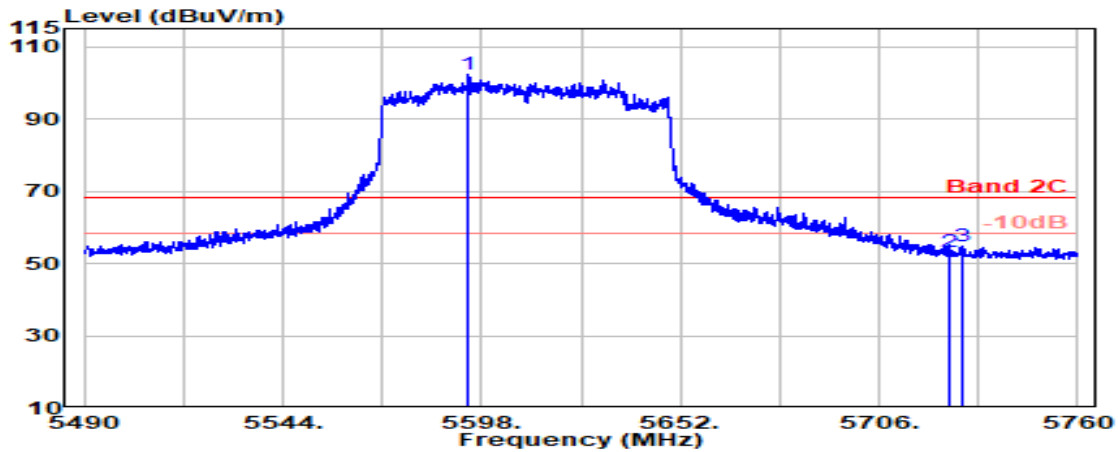

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5594.500	34.71	8.81	39.28	97.98	102.22	---	---	Peak
5725.000	34.45	8.88	39.31	48.98	53.00	68.20	15.20	Peak
5728.300	34.46	8.88	39.31	50.75	54.78	68.20	13.42	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.


Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

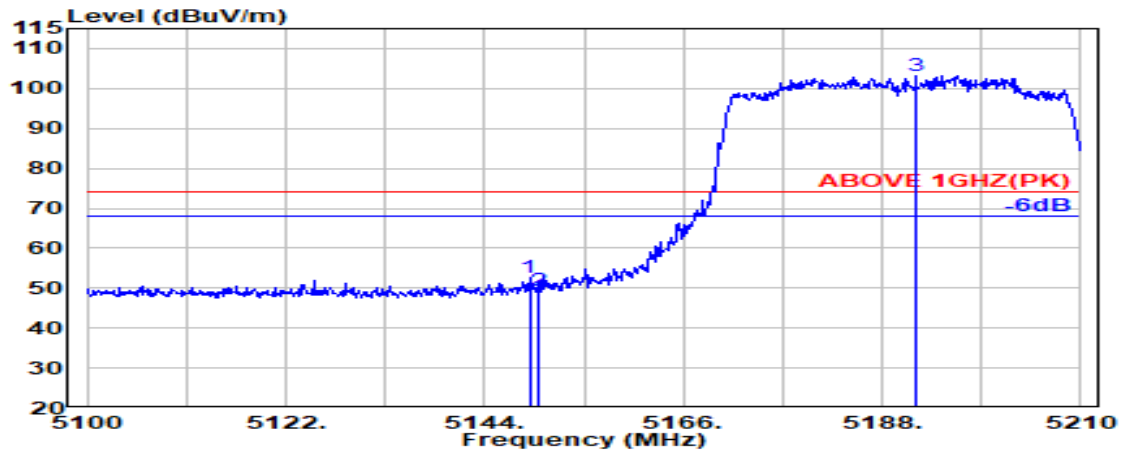

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.800	34.41	8.87	39.29	102.16	106.15	---	---	Peak
5725.000	34.45	8.88	39.29	52.01	56.05	68.20	12.15	Peak
5728.200	34.46	8.88	39.29	57.25	61.29	68.20	6.91	Peak

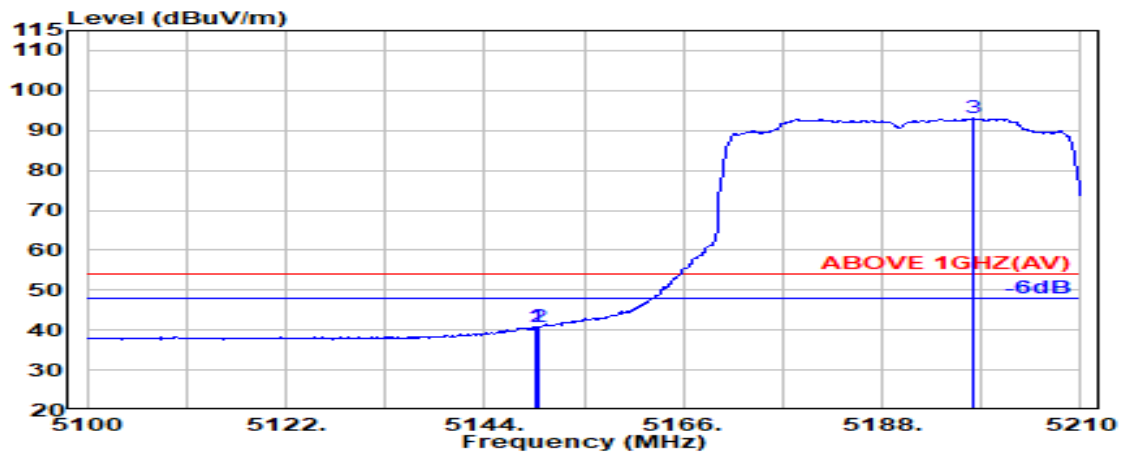


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.550	34.41	8.87	39.29	108.97	112.95	---	---	Peak
5725.000	34.45	8.88	39.29	58.58	62.61	68.20	5.59	Peak
5726.150	34.45	8.88	39.29	61.93	65.97	68.20	2.23	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.


Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

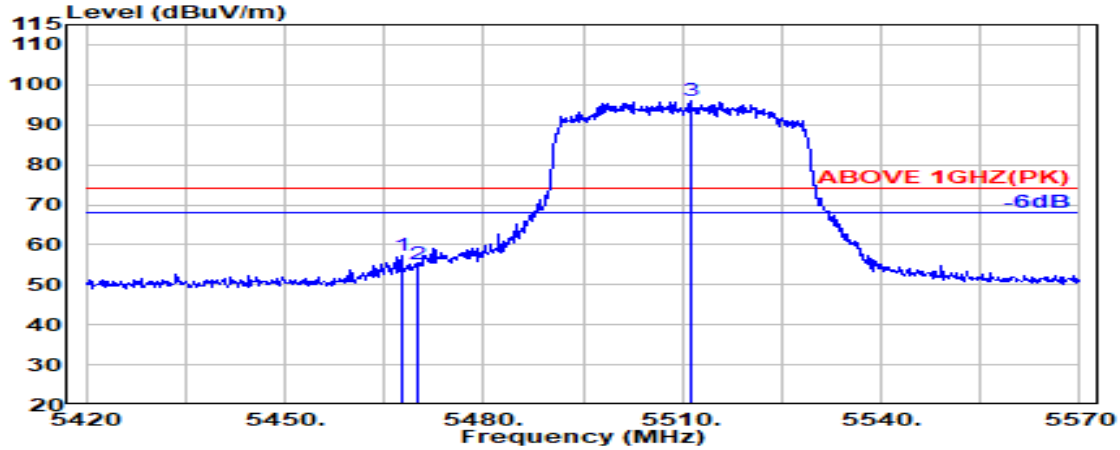

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.550	34.77	8.73	39.25	52.90	57.15	74.00	16.85	Peak
5470.000	34.78	8.74	39.25	51.04	55.31	74.00	18.69	Peak
@ 5511.200	34.88	8.76	39.25	91.46	95.85	---	---	Peak

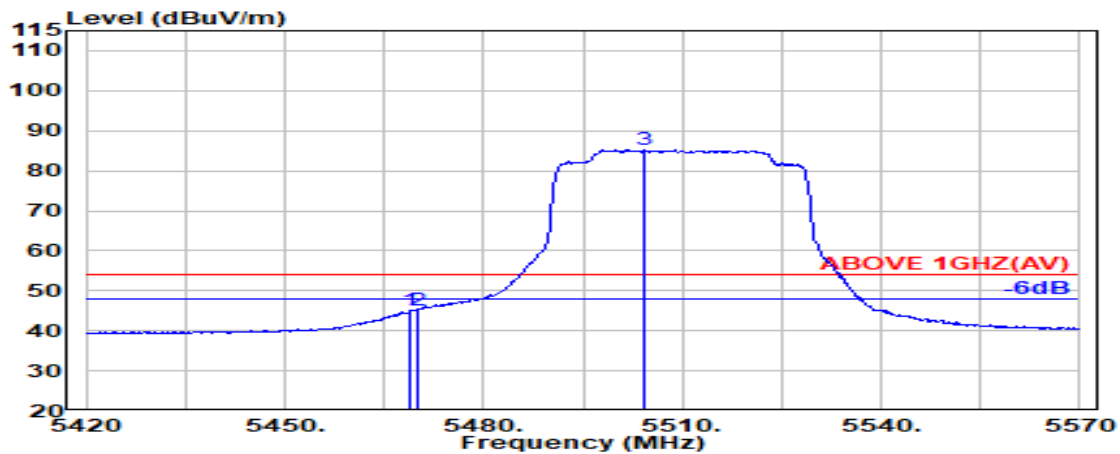


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.78	8.74	39.25	40.73	44.99	54.00	9.01	Average
5470.000	34.78	8.74	39.25	40.85	45.11	54.00	8.89	Average
@ 5504.300	34.89	8.76	39.25	80.74	85.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

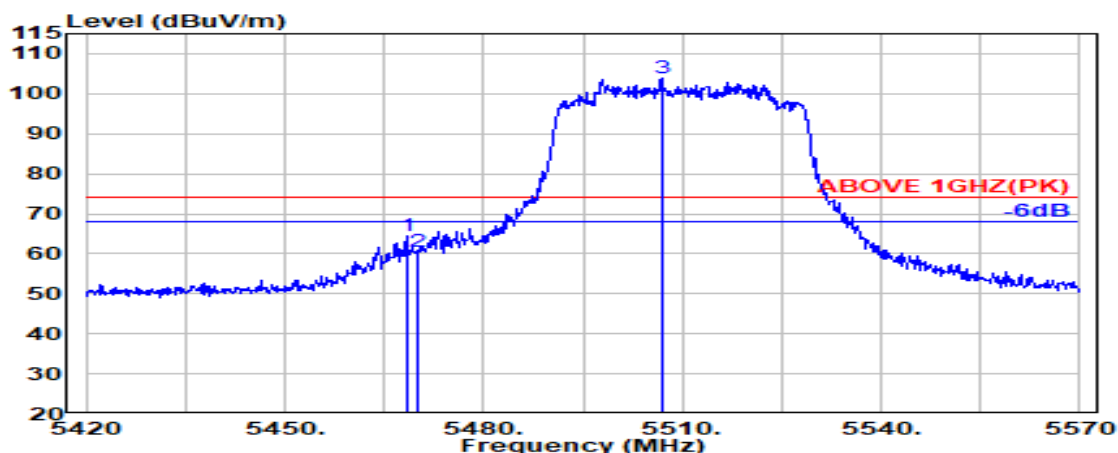

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	34.77	8.73	39.25	60.20	64.45	74.00	9.55	Peak
5470.000	34.78	8.74	39.25	56.21	60.47	74.00	13.53	Peak
@ 5506.850	34.89	8.76	39.25	99.52	103.91	---	---	Peak

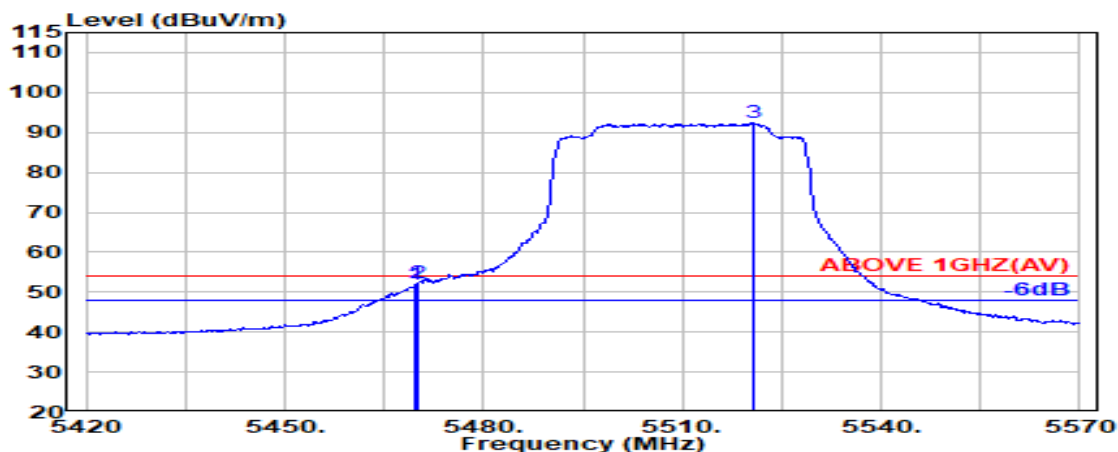

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.650	34.78	8.74	39.25	47.47	51.73	54.00	2.27	Average
5470.000	34.78	8.74	39.25	48.06	52.32	54.00	1.68	Average
@ 5520.650	34.86	8.77	39.25	88.11	92.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.42	38.69	49.73	54.00	4.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.42	39.49	50.53	54.00	3.47	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.60	12.28	39.23	38.61	50.26	54.00	3.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.60	12.28	39.23	38.81	50.47	54.00	3.53	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11400.000	39.10	13.21	39.10	38.72	51.93	54.00	2.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11400.000	39.10	13.21	39.10	38.54	51.75	54.00	2.25	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.10	37.59	50.92	54.00	3.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.10	37.59	50.93	54.00	3.07	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.11	38.51	51.99	54.00	2.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.11	39.74	53.23	54.00	0.77	Peak

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.42	39.56	50.60	54.00	3.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.42	39.58	50.62	54.00	3.38	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.29	40.03	51.30	54.00	2.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.29	38.55	49.82	54.00	4.18	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.04	37.66	50.27	54.00	3.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.04	36.93	49.54	54.00	4.46	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.10	38.61	51.94	54.00	2.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.10	37.77	51.11	54.00	2.89	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.11	37.90	51.38	54.00	2.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.11	37.70	51.19	54.00	2.81	Peak

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.35	39.24	50.37	54.00	3.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.35	38.17	49.30	54.00	4.70	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.28	39.88	51.23	54.00	2.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.28	39.49	50.84	54.00	3.16	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	37.49	50.10	54.00	3.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	37.32	49.94	54.00	4.06	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.10	37.74	51.01	54.00	2.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.10	38.55	51.83	54.00	2.17	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.12	37.20	50.75	54.00	3.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.12	39.20	52.75	54.00	1.25	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.40	38.76	49.83	54.00	4.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.40	40.08	51.15	54.00	2.85	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.26	38.19	49.69	54.00	4.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.26	38.47	49.97	54.00	4.03	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.07	36.87	49.72	54.00	4.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.07	36.86	49.71	54.00	4.29	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.09	38.30	51.48	54.00	2.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.09	38.05	51.22	54.00	2.78	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.14	38.20	51.89	54.00	2.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.14	38.48	52.17	54.00	1.83	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.30	39.02	50.21	54.00	3.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.30	38.42	49.61	54.00	4.39	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	37.27	49.96	54.00	4.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	37.39	50.09	54.00	3.91	Peak

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.54	11.91	39.47	38.92	49.89	54.00	4.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.54	11.91	39.47	38.15	49.12	54.00	4.88	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.29	38.70	49.97	54.00	4.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.29	38.54	49.82	54.00	4.18	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.04	37.65	50.26	54.00	3.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.04	37.24	49.85	54.00	4.15	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.10	37.72	51.06	54.00	2.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.10	37.70	51.04	54.00	2.96	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.11	37.56	51.04	54.00	2.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.11	37.53	51.01	54.00	2.99	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.35	39.12	50.26	54.00	3.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.35	40.33	51.46	54.00	2.54	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.28	38.71	50.06	54.00	3.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.28	38.62	49.97	54.00	4.03	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	36.98	49.59	54.00	4.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	37.69	50.31	54.00	3.69	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.10	38.78	52.05	54.00	1.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.10	38.08	51.35	54.00	2.65	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.12	37.45	51.00	54.00	3.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.12	38.28	51.83	54.00	2.17	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.40	39.76	50.83	54.00	3.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.40	40.26	51.33	54.00	2.67	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.26	38.29	49.79	54.00	4.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.26	38.63	50.14	54.00	3.86	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.07	37.83	50.68	54.00	3.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.07	38.37	51.22	54.00	2.78	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.09	38.68	51.86	54.00	2.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.09	38.13	51.30	54.00	2.70	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.14	37.67	51.36	54.00	2.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.14	38.14	51.83	54.00	2.17	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.30	38.36	49.55	54.00	4.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.30	38.73	49.93	54.00	4.07	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	36.90	49.59	54.00	4.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	36.61	49.31	54.00	4.69	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.44	40.59	51.61	54.00	2.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.44	40.41	51.43	54.00	2.57	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.60	12.28	39.24	40.88	52.53	54.00	1.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.60	12.28	39.24	39.44	51.09	54.00	2.91	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	39.10	13.21	39.12	39.80	52.99	54.00	1.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	39.10	13.21	39.12	39.32	52.51	54.00	1.49	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.13	38.93	52.24	54.00	1.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.13	38.86	52.16	54.00	1.84	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.14	39.36	52.81	54.00	1.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.14	39.12	52.57	54.00	1.43	Peak

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.44	40.67	51.69	54.00	2.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.50	11.96	39.44	40.13	51.15	54.00	2.85	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.31	40.72	51.98	54.00	2.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.31	41.38	52.63	54.00	1.37	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.03	40.03	52.65	54.00	1.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.03	40.42	53.04	54.00	0.96	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.13	39.21	52.52	54.00	1.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.13	38.85	52.16	54.00	1.84	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.14	39.50	52.96	54.00	1.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.14	39.87	53.32	54.00	0.68	Peak

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.37	40.32	51.43	54.00	2.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.37	41.15	52.26	54.00	1.74	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.30	40.94	52.27	54.00	1.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.30	41.60	52.93	54.00	1.07	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	40.33	52.94	54.00	1.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	40.30	52.92	54.00	1.08	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.12	39.88	53.13	54.00	0.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.12	39.78	53.03	54.00	0.97	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.14	39.66	53.18	54.00	0.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.14	39.03	52.55	54.00	1.45	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.42	41.78	52.83	54.00	1.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.42	41.59	52.64	54.00	1.36	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.27	41.61	53.10	54.00	0.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.27	40.12	51.61	54.00	2.39	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.08	39.52	52.37	54.00	1.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.08	39.62	52.46	54.00	1.54	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.11	39.94	53.09	54.00	0.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.11	39.13	52.28	54.00	1.72	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.16	39.41	53.07	54.00	0.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.16	39.43	53.09	54.00	0.91	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.32	41.45	52.63	54.00	1.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.32	40.81	51.98	54.00	2.02	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	39.85	52.54	54.00	1.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	40.22	52.91	54.00	1.09	Peak

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10360.000	38.54	11.91	39.49	40.33	51.28	54.00	2.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10360.000	38.54	11.91	39.49	41.14	52.09	54.00	1.91	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.31	41.11	52.36	54.00	1.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.000	38.44	12.12	39.31	40.69	51.94	54.00	2.06	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.03	40.05	52.67	54.00	1.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.90	12.75	39.03	40.32	52.94	54.00	1.06	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.13	39.21	52.52	54.00	1.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.18	13.25	39.13	40.01	53.31	54.00	0.69	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.14	39.22	52.67	54.00	1.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.28	13.31	39.14	39.70	53.15	54.00	0.85	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.37	41.73	52.84	54.00	1.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.44	12.04	39.37	41.17	52.28	54.00	1.72	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.30	41.33	52.67	54.00	1.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.48	12.15	39.30	41.34	52.68	54.00	1.32	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	39.96	52.57	54.00	1.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.80	12.87	39.05	40.42	53.04	54.00	0.96	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.12	39.69	52.94	54.00	1.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.14	13.23	39.12	39.98	53.23	54.00	0.77	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.14	39.23	52.75	54.00	1.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.33	13.33	39.14	39.05	52.57	54.00	1.43	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.42	41.16	52.21	54.00	1.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.48	11.99	39.42	41.66	52.71	54.00	1.29	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.27	41.10	52.59	54.00	1.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.56	12.20	39.27	40.06	51.55	54.00	2.45	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.08	39.67	52.52	54.00	1.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.92	13.00	39.08	39.91	52.75	54.00	1.25	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.11	39.80	52.96	54.00	1.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.08	13.19	39.11	39.53	52.69	54.00	1.31	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.16	39.26	52.93	54.00	1.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.45	13.38	39.16	38.75	52.41	54.00	1.59	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.32	41.23	52.40	54.00	1.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.10	39.32	40.58	51.75	54.00	2.25	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	40.80	53.49	54.00	0.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.84	12.91	39.06	39.99	52.68	54.00	1.32	Peak

Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.700	39.28	13.31	39.11	37.36	50.85	54.00	3.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.700	39.28	13.31	39.11	36.29	49.77	54.00	4.23	Peak

Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.500	38.84	12.91	39.06	36.83	49.53	54.00	4.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.500	38.84	12.91	39.06	37.10	49.79	54.00	4.21	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED

BANDWIDTH

Test Date	2023/10/19 ~ 12/25	Temp./Hum.	22 ~ 25°C/55 ~ 58%
Cable Loss	1.93dB	Tested By	Harry Huang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Average Output Power and Emission/Occupied Bandwidth

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5180	23.00	23.13	16.611	16.610	16.43	15.63	N/A	24	N/A	
	5200	22.58	22.62	16.619	16.630	16.44	15.64				
	5240	22.87	22.98	16.711	16.596	16.27	15.44				
U-NII Band 2A	5260	23.19	23.82	16.599	16.809	16.29	15.58	N/A	24	24.65	
	5300	22.98	22.38	16.620	16.686	16.27	15.68			24.50	
	5320	22.77	23.16	16.669	16.638	16.24	16.64			24.57	
U-NII Band 2C	5500	22.87	23.09	16.709	16.574	16.03	15.14	N/A	24	24.59	
	5580	22.40	22.16	16.563	16.535	16.01	15.63			24.46	
	5700	22.59	22.76	16.636	16.697	16.11	15.93			24.54	
	5720	23.31	23.31	16.595	16.579	16.16	16.25			24.68	
Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 3	5745	13.22	16.40	16.571	16.601	16.31	16.16	N/A	30	N/A	
	5785	16.37	16.40	16.445	16.584	15.85	15.84				
	5825	16.36	11.30	16.507	16.592	15.97	15.87				

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11n- HT20	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}						
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)											
		Aux	Main	Aux	Main	Aux	Main										
U-NII Band 1	5180	22.35	23.20	17.721	17.697	16.35	16.03	N/A	24	N/A							
	5200	23.83	23.66	17.864	17.769	16.17	16.25										
	5240	23.51	23.19	17.763	17.761	16.18	16.10										
U-NII Band 2A	5260	23.55	22.87	17.744	17.779	16.25	16.23			N/A	24	24.59					
	5300	23.56	22.43	17.746	17.769	16.16	16.14					24.51					
	5320	23.65	23.95	17.749	17.774	16.05	16.01					24.74					
U-NII Band 2C	5500	22.73	22.62	17.728	17.804	16.01	15.88					N/A	24	24.54			
	5580	23.83	23.21	17.786	17.708	16.02	15.87							24.66			
	5700	23.20	23.71	17.682	17.747	16.01	15.85							24.65			
	5720	22.73	22.64	17.758	17.734	16.13	16.07							24.55			
Mode 802.11n- HT20	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)								Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)											
		Aux	Main	Aux	Main	Aux	Main										
U-NII Band 3	5745	12.29	16.36	17.692	17.696	15.98	15.94	N/A	30					N/A			
	5785	17.61	16.35	17.696	17.688	15.90	15.77										
	5825	17.61	17.62	17.676	17.677	15.93	15.78										

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11n- HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+ 10 log B) ^{Note 3}			
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 1	5190	42.28	41.38	36.045	36.153	15.65	15.52	N/A	24	N/A				
	5230	42.72	41.75	36.087	36.044	16.37	16.32							
U-NII Band 2A	5270	42.49	40.97	3.000	36.020	16.38	16.12							
	5310	41.60	39.73	35.995	36.035	15.26	15.12							
U-NII Band 2C	5510	41.51	40.41	35.947	36.119	16.16	15.93							
	5550	45.22	42.07	36.164	36.048	16.14	16.04							
	5670	41.53	40.77	36.072	36.236	16.23	15.71							
	5710	40.96	40.80	36.073	36.030	16.10	16.16							
Mode 802.11n- HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)					Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+ 10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 3	5755	32.58	34.71	36.106	36.103	16.14	16.09	N/A	30	N/A				
	5795	26.60	32.69	36.118	36.201	16.07	15.91							

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98% , please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ac- VHT80	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	83.40	82.35	74.988	75.021	11.56	11.45	N/A	24	N/A	
U-NII Band 2A	5290	83.78	82.71	75.081	75.113	11.99	11.76			30.18	
U-NII Band 2C	5530	83.46	82.22	75.018	75.027	12.42	12.20			30.15	
	5610	85.32	6.54	75.375	75.270	12.05	12.71			19.16	
	5690	92.21	86.45	75.498	75.209	12.38	13.37			30.37	
Mode 802.11ac- VHT80	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	72.75	60.74	75.119	75.335	12.93	13.81	N/A	30	N/A	

Mode 802.11ac- VHT160	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth							
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	161.50	161.80	153.32	153.26	6.84	7.93	N/A	24	33.08	
U-NII Band 2C	5570	162.30	161.80	152.97	153.04	9.13	10.88			33.09	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}						
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)											
		Aux	Main	Aux	Main	Aux	Main										
U-NII Band 1	5180	23.68	23.09	18.892	18.910	16.53	16.36	N/A	24	N/A							
	5200	23.06	22.38	18.926	18.913	16.32	16.25										
	5240	23.18	23.48	18.795	18.908	16.28	16.12										
U-NII Band 2A	5260	23.64	23.29	18.856	18.947	16.33	16.28			N/A	24	24.67					
	5300	22.51	22.61	18.864	18.904	16.31	16.27					24.52					
	5320	23.51	23.79	18.916	18.980	16.22	16.38					24.71					
U-NII Band 2C	5500	23.19	23.21	18.893	18.944	16.08	15.98					N/A	24	24.65			
	5580	23.33	23.50	18.935	18.863	15.87	15.72							24.68			
	5700	23.02	23.33	18.942	18.897	16.09	15.91							24.62			
	5720	23.36	23.14	18.982	18.906	16.14	15.94							24.64			
Mode 802.11ax- HE20	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)								Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)											
		Aux	Main	Aux	Main	Aux	Main										
U-NII Band 3	5745	16.32	16.98	18.959	18.874	16.19	15.80	N/A	30					N/A			
	5785	13.82	17.76	18.887	18.881	15.85	15.80										
	5825	18.41	18.89	18.809	18.910	15.92	15.90										

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}		
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main						
		Aux	Main	Aux	Main								
U-NII Band 1	5190	40.67	42.09	37.546	37.477	15.38	15.29	N/A	24	N/A			
	5230	42.32	41.64	37.542	37.503	16.29	16.24						
U-NII Band 2A	5270	42.72	40.93	37.566	37.446	16.50	16.31						
	5310	41.94	40.50	37.486	37.501	15.05	15.02						
U-NII Band 2C	5510	40.57	41.06	37.364	37.562	16.18	16.12						
	5550	41.13	42.48	37.571	37.579	16.21	16.01						
	5670	41.66	40.97	37.616	37.440	16.09	15.85						
	5710	41.56	40.27	37.419	37.441	16.08	16.15						
U-NII Band 3	5755	27.79	36.16	37.577	37.441	16.19	16.02				N/A	30	N/A
	5795	36.17	35.19	37.454	37.489	16.11	15.97						

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE80	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}	
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)						
		Aux	Main	Aux	Main	Aux	Main					
U-NII Band 1	5210	82.61	81.24	76.516	76.600	11.45	9.85	N/A	24	N/A		
U-NII Band 2A	5290	82.22	81.24	76.711	76.634	11.83	11.16				14.52	30.10
U-NII Band 2C	5530	82.20	80.88	76.468	76.489	11.89	11.25				14.59	30.08
	5610	83.34	82.63	76.856	76.683	11.79	12.60				15.22	30.17
	5690	82.59	83.35	76.534	76.667	12.32	13.33				15.86	30.17
Mode 802.11ax- HE80	Centre Frequenc y (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}	
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)						
		Aux	Main	Aux	Main	Aux	Main					
U-NII Band 3	5775	73.83	52.10	76.693	76.642	12.88	14.07	N/A	30	N/A		

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	162.60	161.80	154.46	154.95	6.98	7.73	N/A	24	33.09	
U-NII Band 2C	5570	162.60	163.70	154.86	154.57	9.24	10.47			12.91	33.11

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) $10\log(1/X)$	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5180	26/0	23.68	23.09	18.892	18.910	9.92	9.81	N/A	12.88	24	N/A
		52/37	23.68	23.09	18.892	18.910	13.32	13.23	N/A	16.29		
		106/53	23.68	23.09	18.892	18.910	15.73	15.64	N/A	18.70		
U-NII Band 2A	5320	26/8	23.51	23.79	18.916	18.980	9.76	9.62	N/A	12.70	24	24.71
		52/40	23.51	23.79	18.916	18.980	13.03	13.01	N/A	16.03		24.71
		106/54	23.51	23.79	18.916	18.980	15.31	15.27	N/A	18.30		24.71
U-NII Band 2C	5500	26/0	23.19	23.21	18.893	18.944	9.71	9.65	N/A	12.69	24	24.65
		52/37	23.19	23.21	18.893	18.944	13.07	13.01	N/A	16.05		24.65
		106/53	23.19	23.21	18.893	18.944	14.96	14.83	N/A	17.91		24.65
	5700	26/8	23.02	23.33	18.942	18.897	9.65	9.58	N/A	12.63		24.62
		52/40	23.02	23.33	18.942	18.897	13.23	13.20	N/A	16.23		24.62
		106/54	23.02	23.33	18.942	18.897	15.88	15.68	N/A	18.79		24.62
U-NII Band 3	5745	26/0	16.32	16.98	18.959	18.874	15.41	15.34	N/A	18.39	30	N/A
		52/37	16.32	16.98	18.959	18.874	13.24	13.21	N/A	16.24		
		106/53	16.32	16.98	18.959	18.874	16.01	15.97	N/A	19.00		
5825	26/8	18.41	18.89	18.809	18.910	15.45	15.43	N/A	18.45			
	52/40	18.41	18.89	18.809	18.910	13.23	13.22	N/A	16.24			
	106/54	18.41	18.89	18.809	18.910	15.93	15.96	N/A	18.96			

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE40	Centre Frequenc y (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) $10\log(1/X)$	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5190	242/61	40.67	42.09	37.546	37.477	16.07	16.02	N/A	24	N/A	
U-NII Band 2A	5310	242/62	41.94	40.50	37.486	37.501	15.90	15.10				
U-NII Band 2C	5510	242/61	40.57	41.06	37.364	37.562	15.97	15.99				
	5670	242/62	41.66	40.97	37.616	37.440	16.09	16.03				
U-NII Band 3	5755	242/61	27.79	36.16	37.577	37.441	16.11	15.94	N/A	30	N/A	
	5795	242/62	36.17	35.19	37.454	37.489	15.99	15.79				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE80	Centre Frequenc y (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+10 log B) ^{Note 3}	
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 1	5210	484/65	82.61	81.24	76.516	76.600	14.57	14.52	N/A	17.56	24	N/A	
U-NII Band 2A	5290	484/66	82.22	81.24	76.711	76.634	12.53	12.46				15.51	30.10
U-NII Band 2C	5530	484/65	82.20	80.88	76.468	76.489	15.65	15.57				18.62	30.08
	5610	484/66	83.34	82.63	76.856	76.683	16.07	16.08				19.09	30.17
Mode 802.11ax- HE80	Centre Frequenc y (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+10 log B) ^{Note 3}	
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 3	5775	484/65	73.83	52.10	76.693	76.642	16.13	15.95	N/A	19.05	30	N/A	
		484/66	73.83	52.10	76.693	76.642	16.11	16.08		19.11			

Mode 802.11ax- HE160	Centre Frequenc y (MHz)	RU Configuratio n	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1/2A	5250	996/97	162.60	161.80	154.46	154.95	9.54	10.52	N/A	13.07	24	33.09
		996/S67	162.60	161.80	154.46	154.95	8.20	9.43		11.87		33.09
U-NII Band 2C	5570	996/97	162.60	163.70	154.86	154.57	9.95	10.54		13.27		33.11
		996/S67	162.60	163.70	154.86	154.57	12.46	13.48		16.01		33.11


Note: 1. The results have been included cable loss.


2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.


3. B is the 26 dB emission bandwidth.

A.3.2 Measurement Plots

- Maximum Output Power

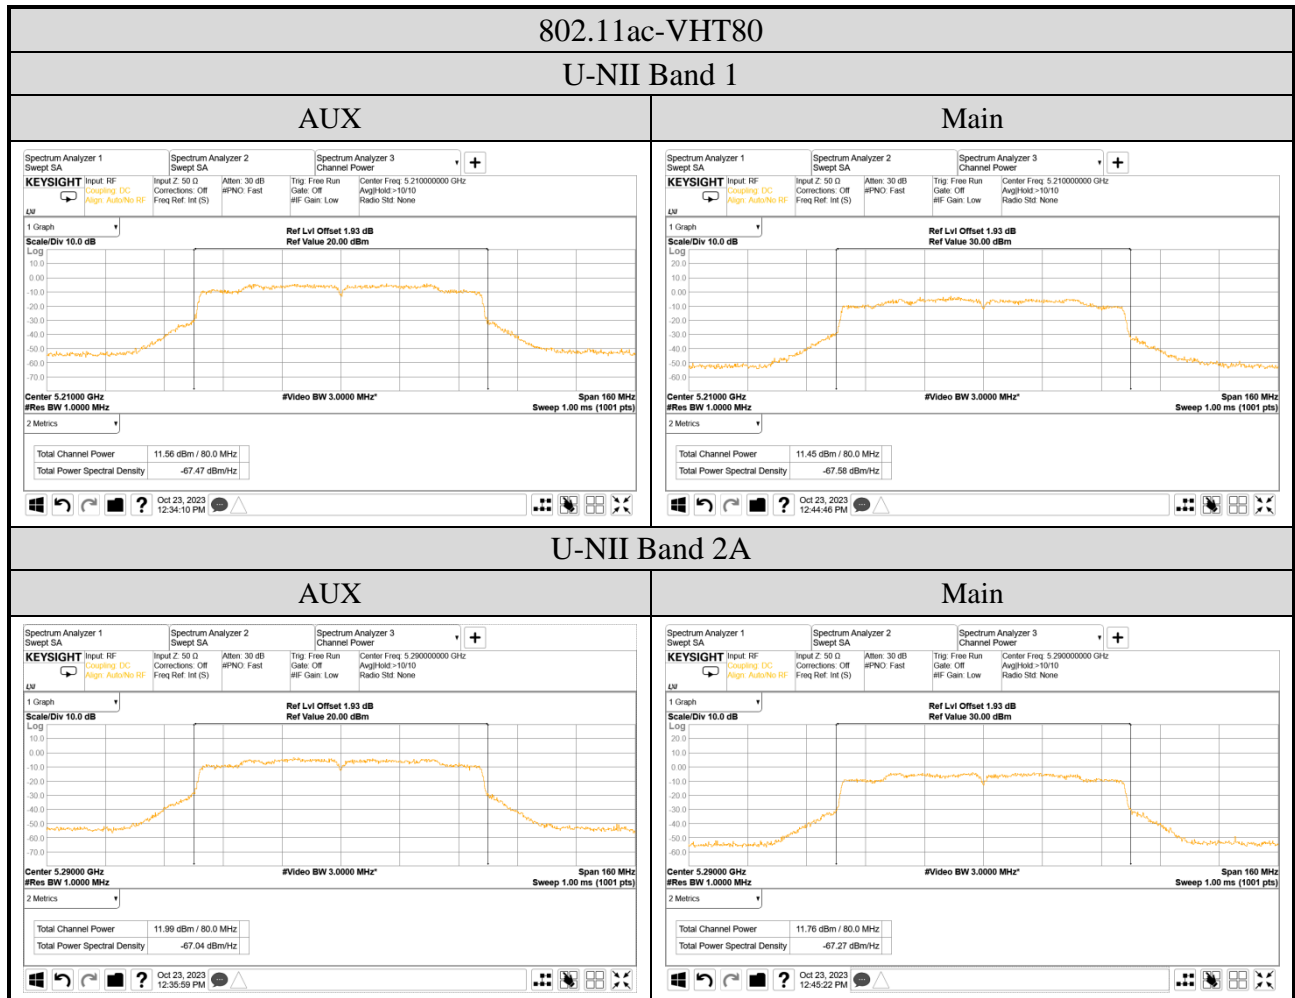

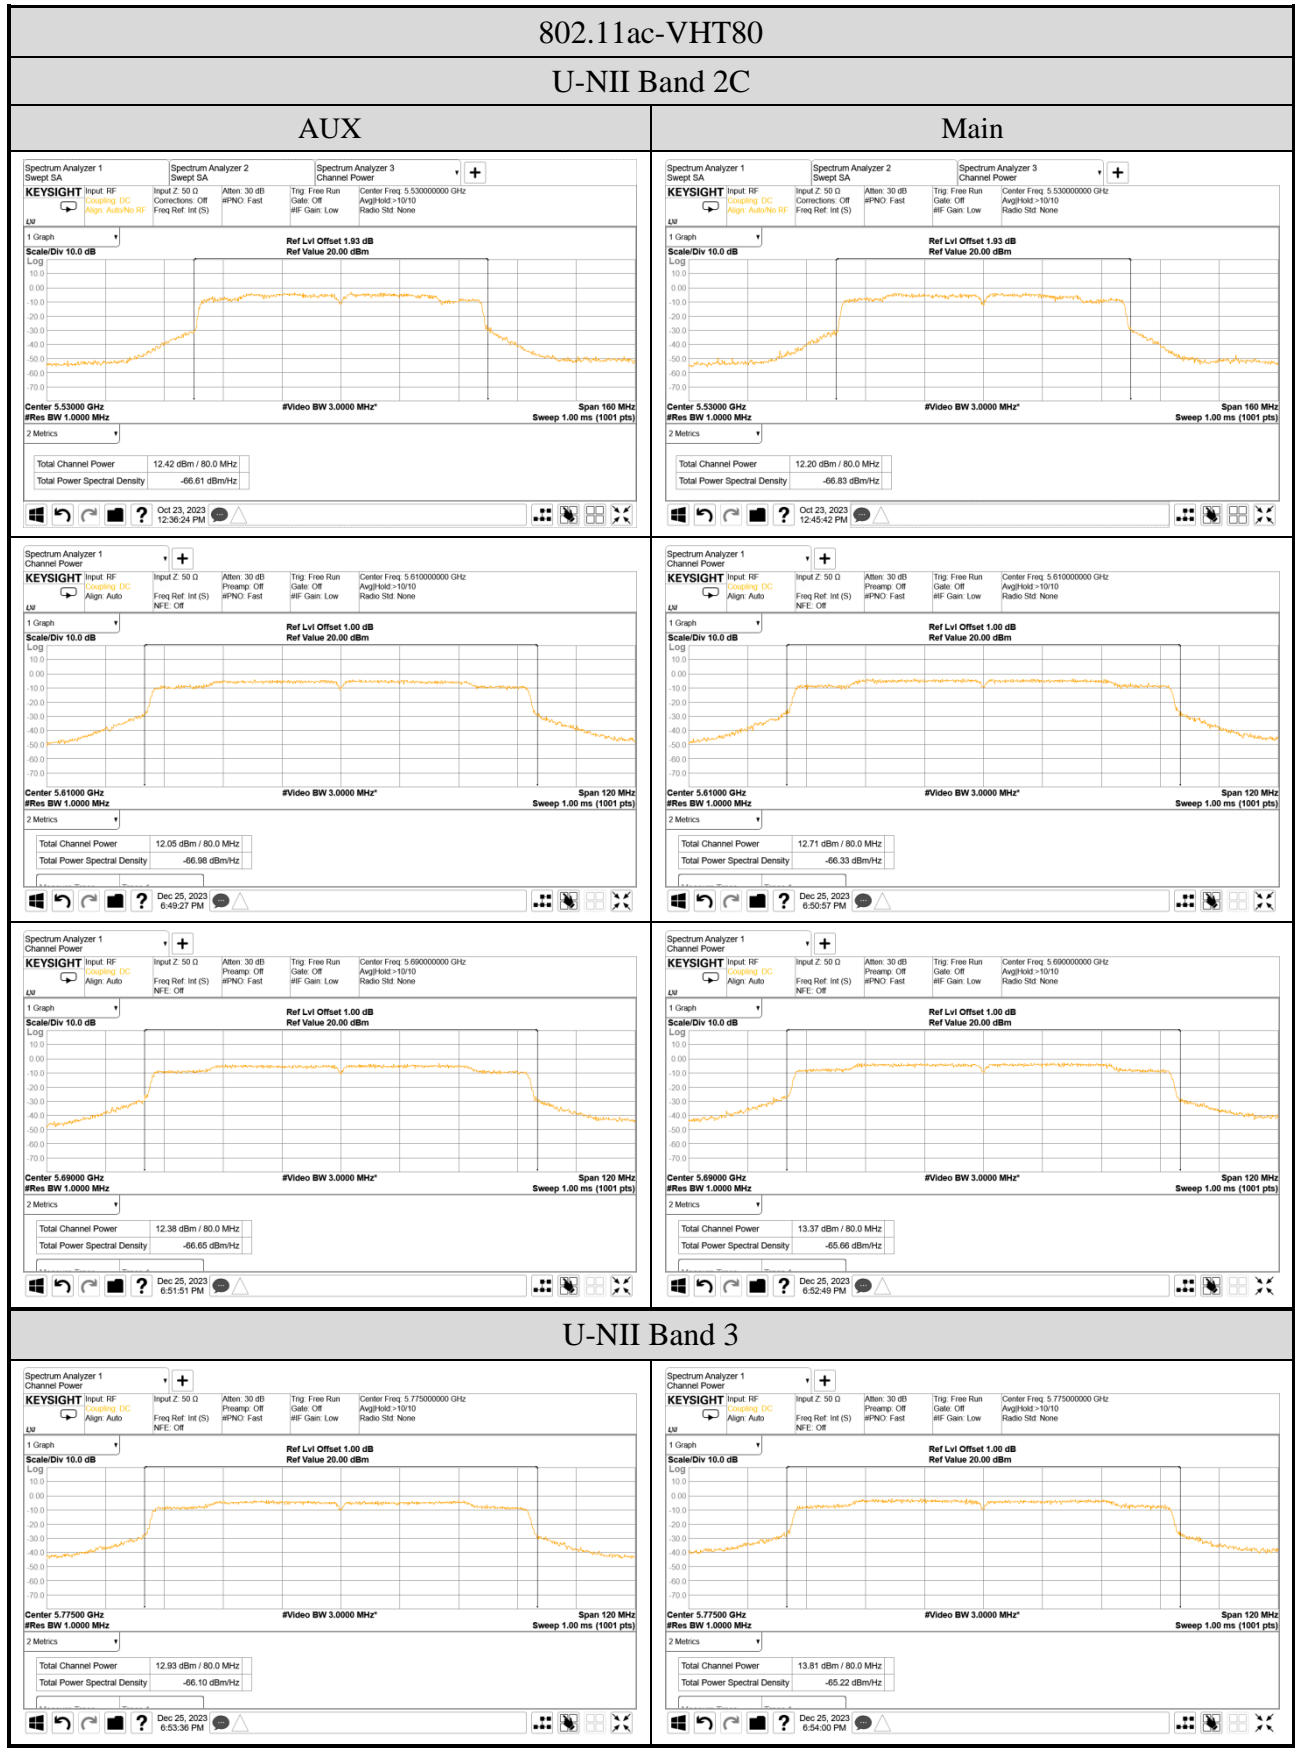

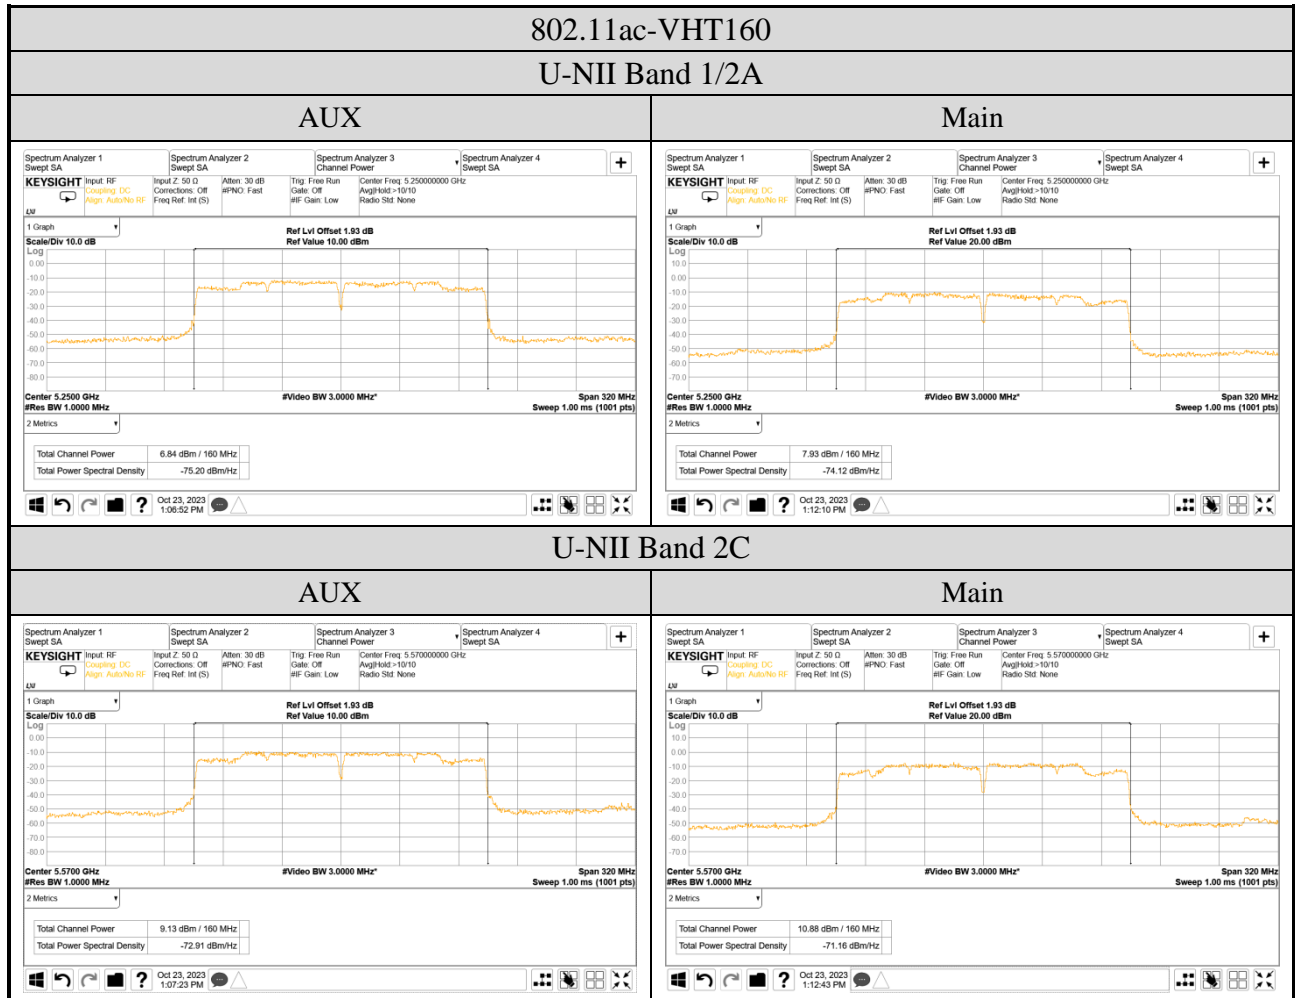

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

