



Mode	802.11be-EHT80	U-NII Band	4
		Frequency	TX 5855MHz

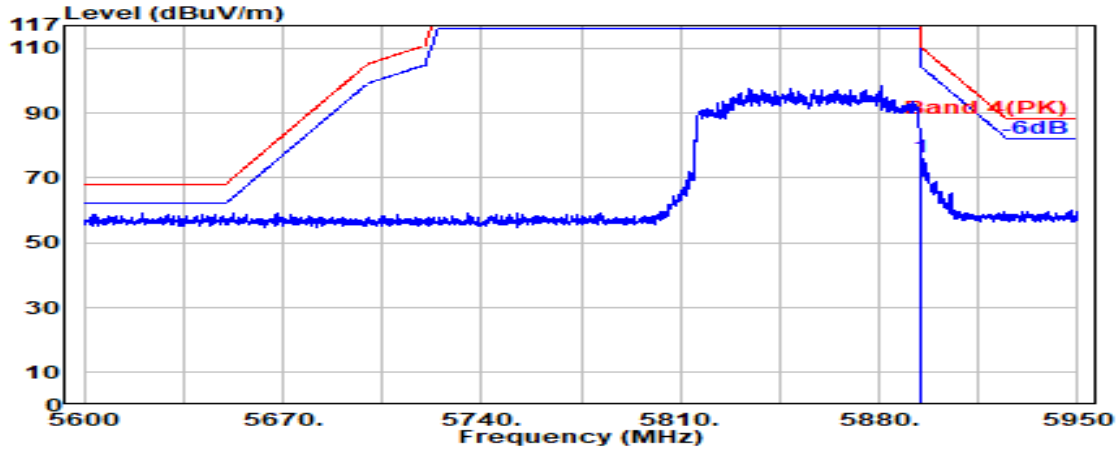

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	72.43	76.26	110.16	33.90	Peak

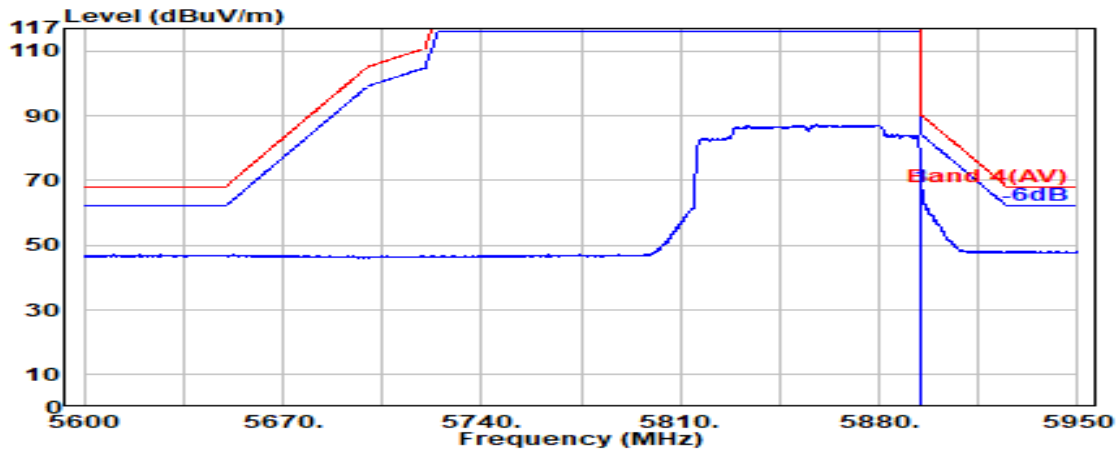


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	64.17	68.01	90.16	22.15	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT80	U-NII Band	4
		Frequency	TX 5855MHz

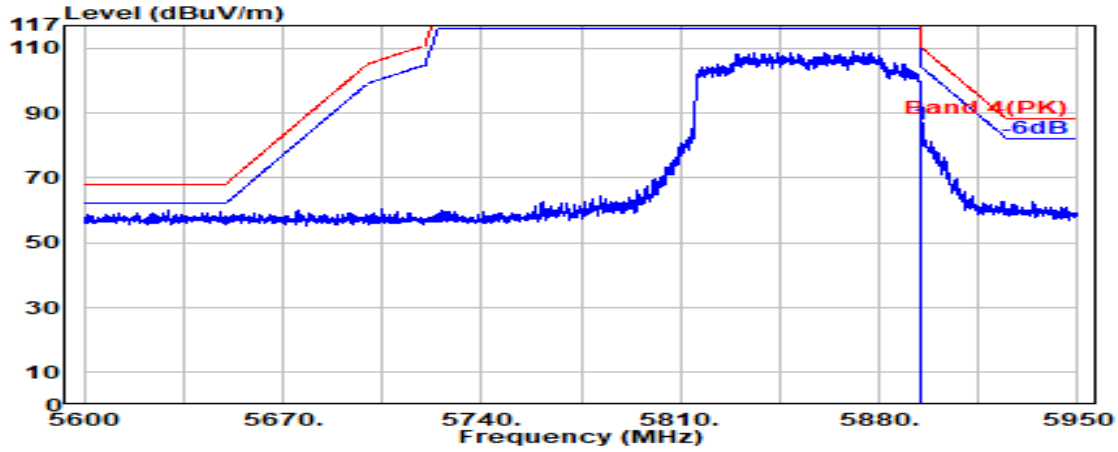

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	82.54	86.37	110.16	23.79	Peak

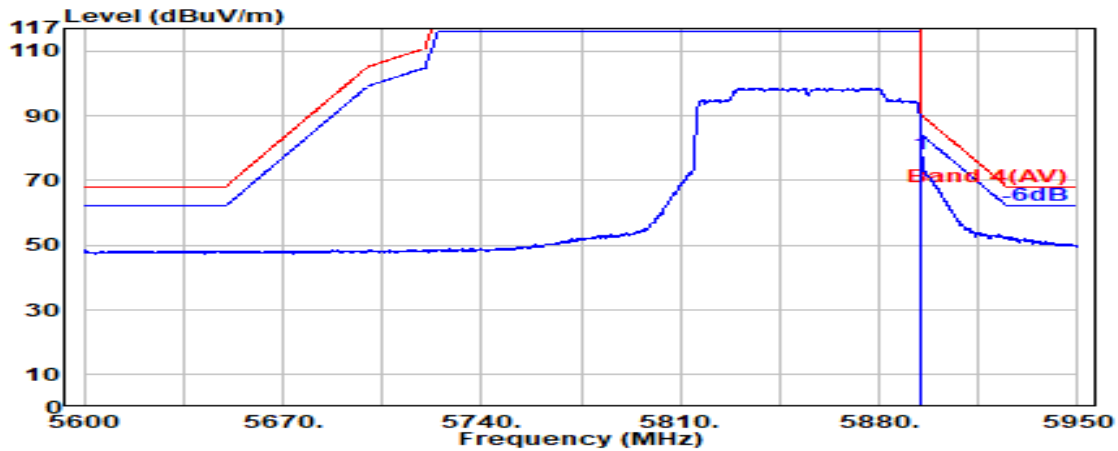


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	74.49	78.32	90.16	11.84	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

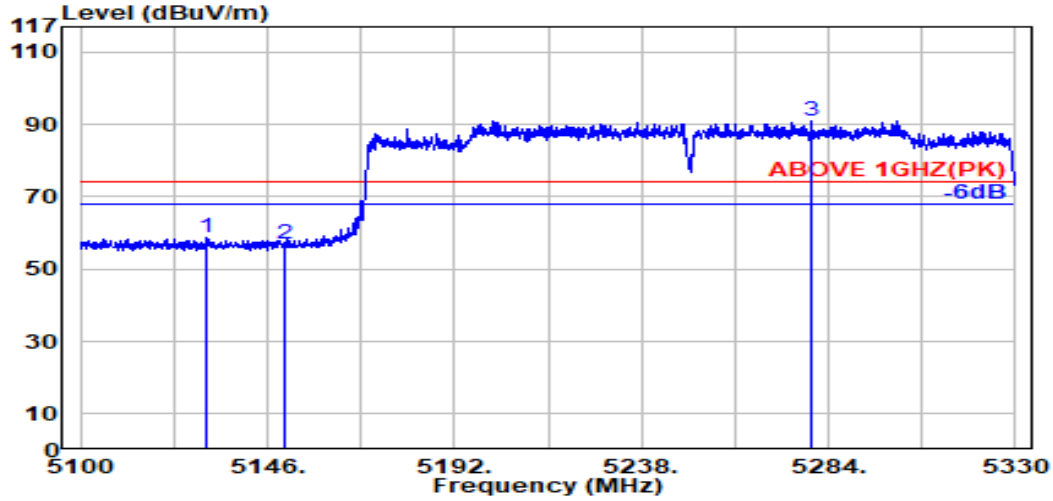

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.100	33.46	8.35	39.27	56.13	58.67	74.00	15.33	Peak
5150.000	33.50	8.37	39.27	54.26	56.86	74.00	17.14	Peak
@ 5279.600	33.76	8.50	39.26	88.06	91.06	---	---	Peak

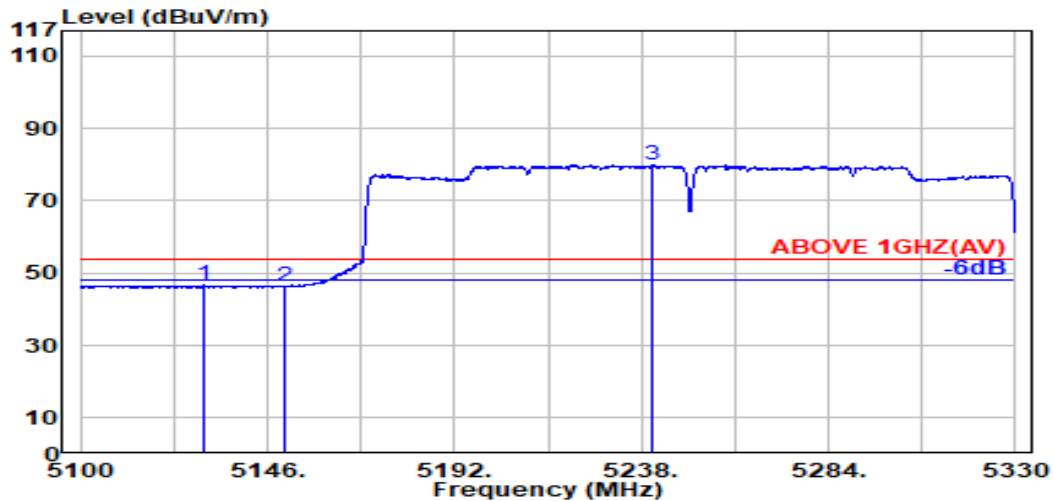


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.200	33.46	8.35	39.27	44.05	46.59	54.00	7.41	Average
5150.000	33.50	8.37	39.27	43.74	46.34	54.00	7.66	Average
@ 5240.900	33.72	8.47	39.27	76.98	79.89	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

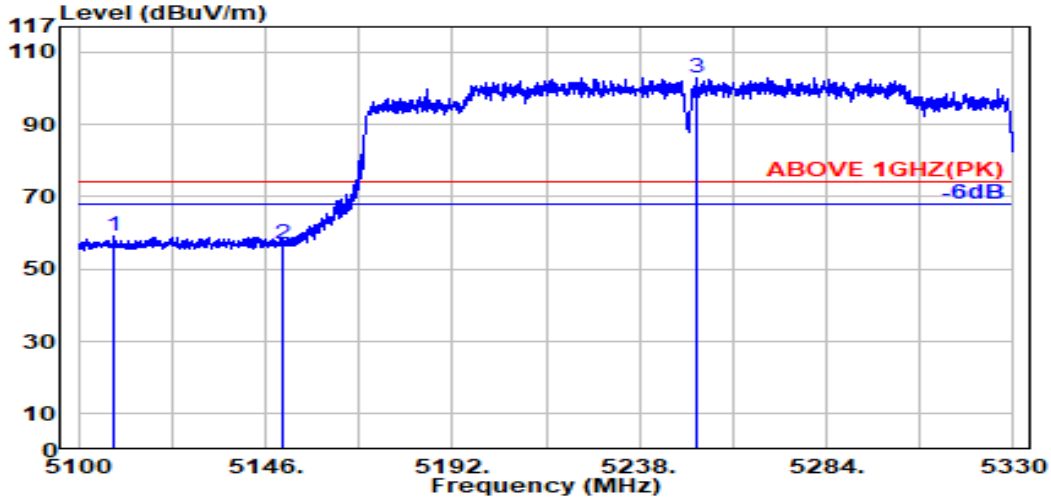

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.600	33.42	8.33	39.27	56.65	59.13	74.00	14.87	Peak
5150.000	33.50	8.37	39.27	54.19	56.80	74.00	17.20	Peak
@ 5252.200	33.70	8.48	39.26	100.10	103.02	---	---	Peak

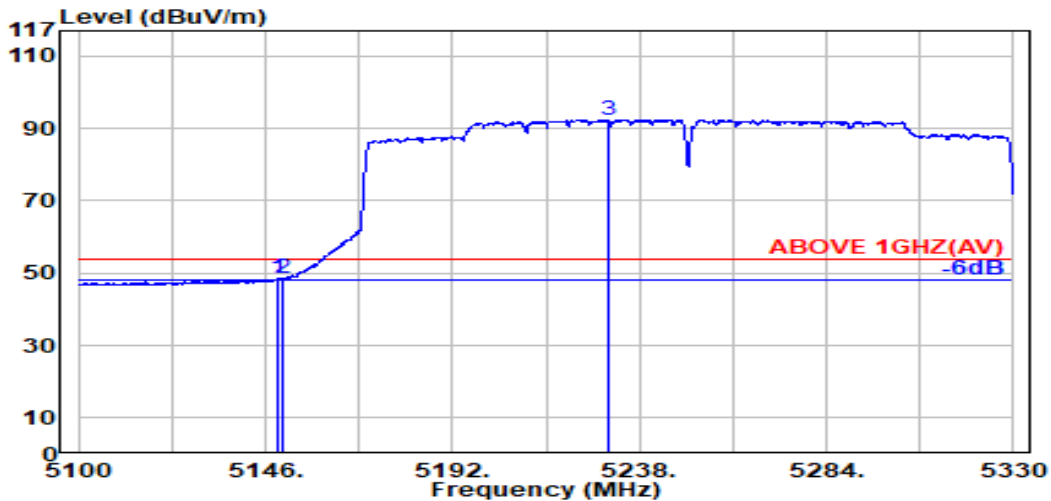


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.27	46.01	48.61	54.00	5.39	Average
5150.000	33.50	8.37	39.27	45.89	48.50	54.00	5.50	Average
@ 5230.600	33.74	8.45	39.27	89.56	92.49	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

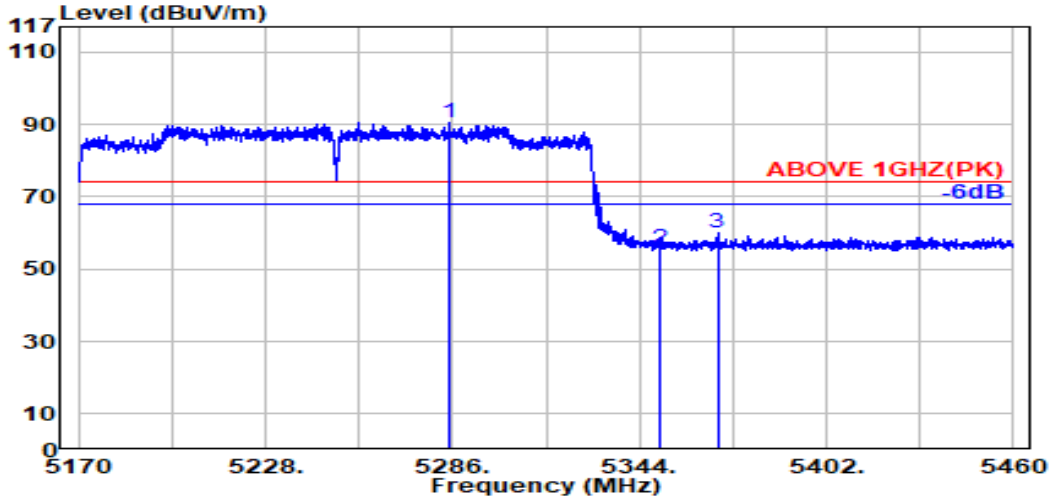

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.900	33.77	8.51	39.26	87.51	90.53	---	---	Peak
5350.000	33.70	8.57	39.26	52.76	55.77	74.00	18.23	Peak
5368.200	33.77	8.59	39.26	56.84	59.95	74.00	14.05	Peak

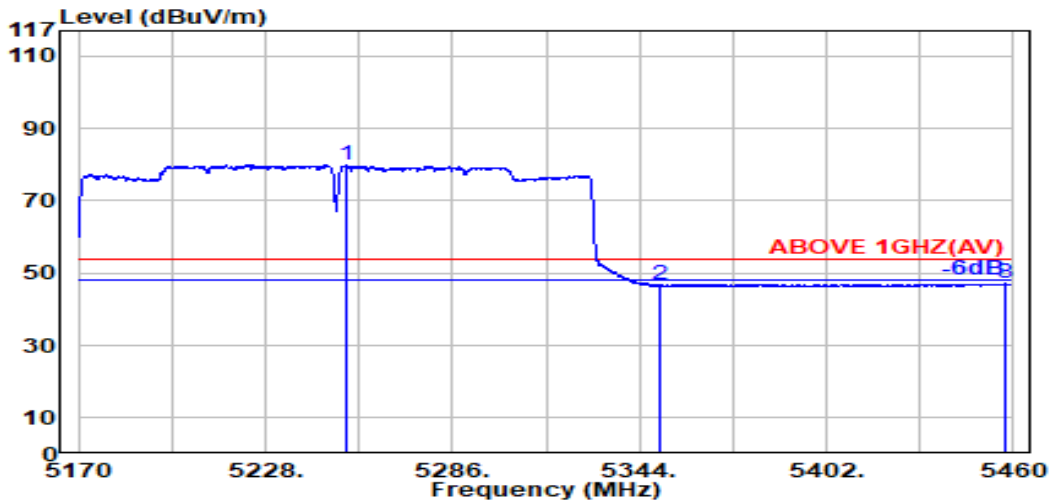


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5253.100	33.71	8.48	39.26	77.04	79.96	---	---	Average
5350.000	33.70	8.57	39.26	43.61	46.62	54.00	7.38	Average
5457.200	34.01	8.68	39.25	43.68	47.12	54.00	6.88	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

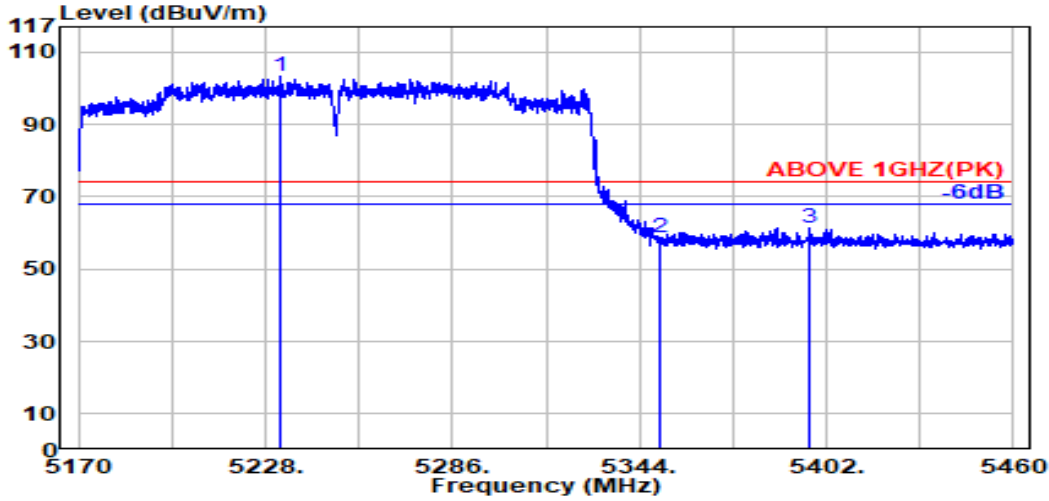

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5232.500	33.73	8.46	39.27	100.31	103.24	---	---	Peak
5350.000	33.70	8.57	39.26	55.58	58.59	74.00	15.41	Peak
5397.000	33.89	8.62	39.26	58.23	61.48	74.00	12.52	Peak

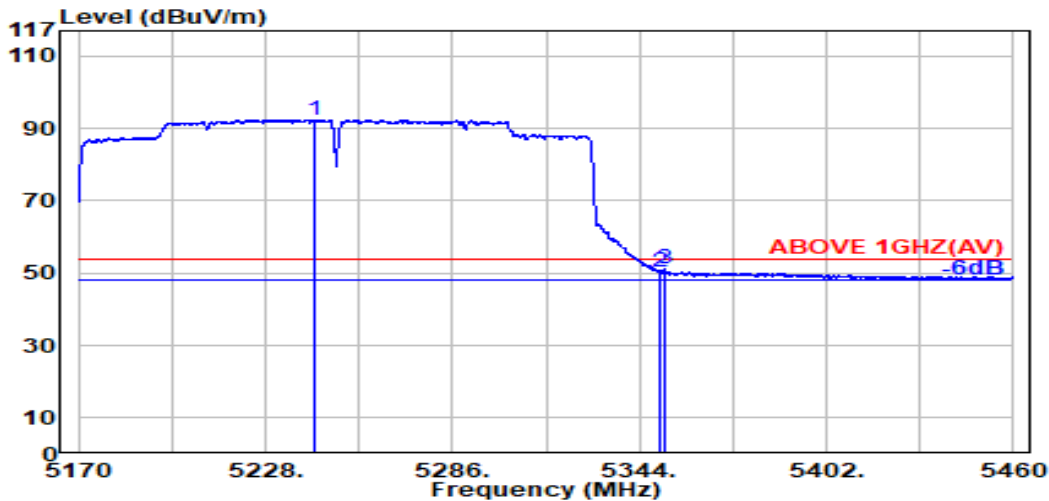


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5243.500	33.71	8.47	39.27	89.54	92.45	---	---	Average
5350.000	33.70	8.57	39.26	47.41	50.43	54.00	3.57	Average
5351.500	33.71	8.57	39.26	48.03	51.05	54.00	2.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

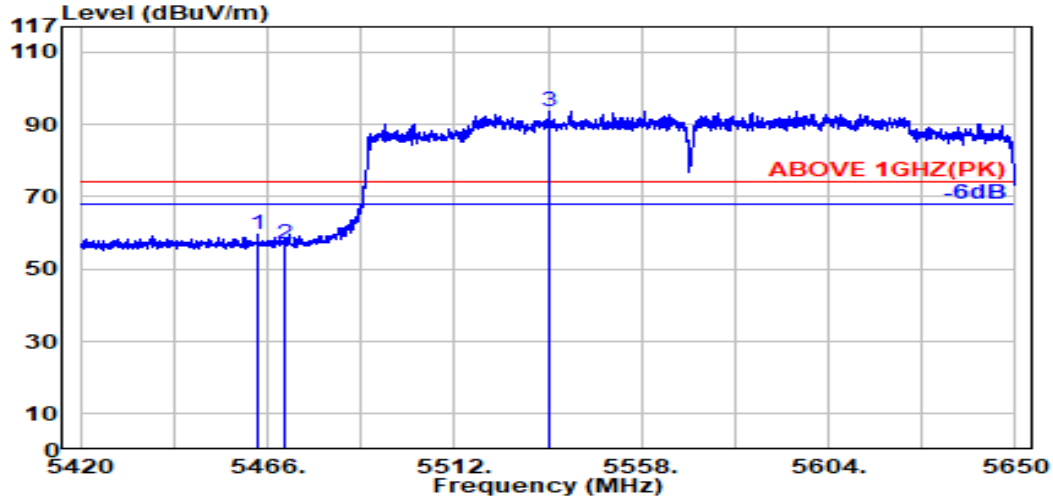

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.03	8.68	39.25	56.13	59.59	74.00	14.41	Peak
5470.000	34.04	8.69	39.25	53.30	56.78	74.00	17.22	Peak
@ 5535.300	34.03	8.75	39.26	90.20	93.72	---	---	Peak

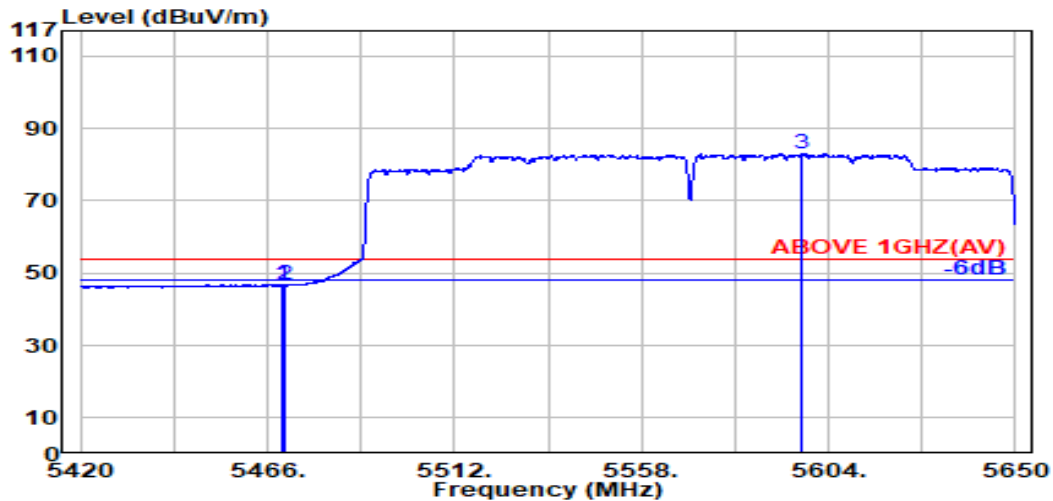


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.04	8.69	39.25	43.38	46.86	54.00	7.14	Average
5470.000	34.04	8.69	39.25	43.17	46.65	54.00	7.35	Average
@ 5597.600	33.81	8.81	39.27	79.58	82.93	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

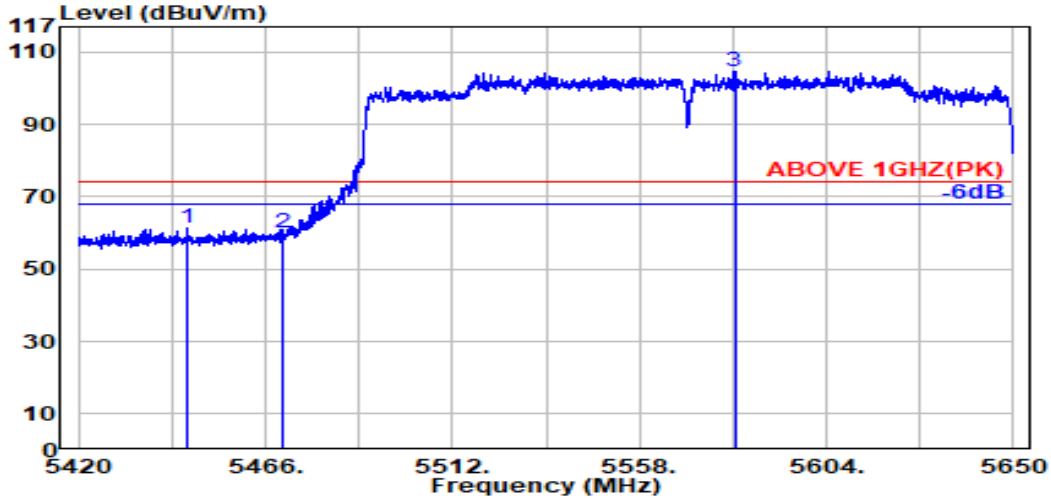

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.600	33.99	8.67	39.25	58.08	61.48	74.00	12.52	Peak
5470.000	34.04	8.69	39.25	56.51	59.98	74.00	14.02	Peak
@ 5581.400	33.87	8.79	39.27	101.38	104.78	---	---	Peak

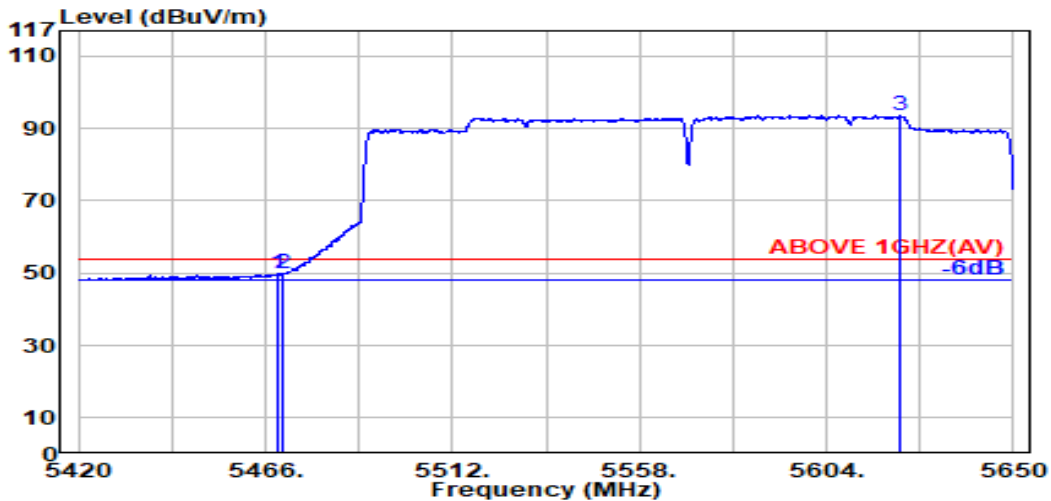


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.04	8.69	39.25	46.50	49.98	54.00	4.02	Average
5470.000	34.04	8.69	39.25	46.24	49.71	54.00	4.29	Average
@ 5622.300	33.80	8.83	39.27	90.23	93.59	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

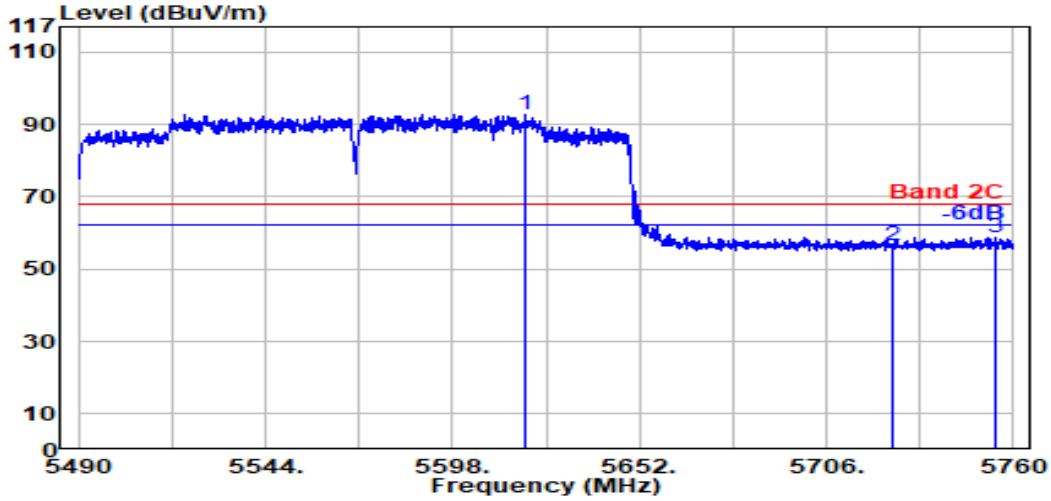

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.200	33.80	8.83	39.27	89.54	92.89	---	---	Peak
5725.000	33.60	8.93	39.29	53.40	56.64	68.20	11.56	Peak
5754.600	33.62	8.95	39.30	55.64	58.91	68.20	9.29	Peak

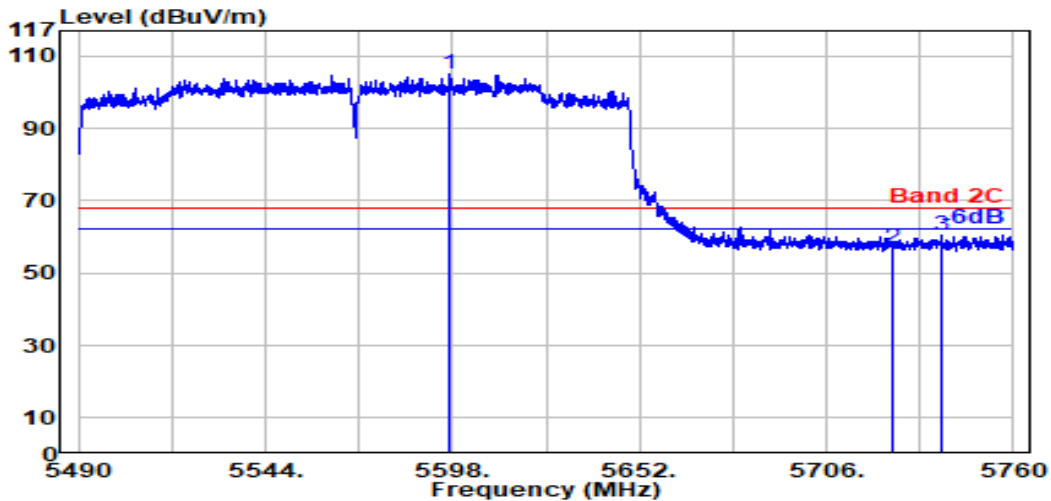


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5597.400	33.81	8.81	39.27	101.54	104.90	---	---	Peak
5725.000	33.60	8.93	39.29	53.51	56.75	68.20	11.45	Peak
5739.000	33.60	8.94	39.29	57.14	60.39	68.20	7.81	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT160	U-NII Band	4
		Frequency	TX 5815MHz

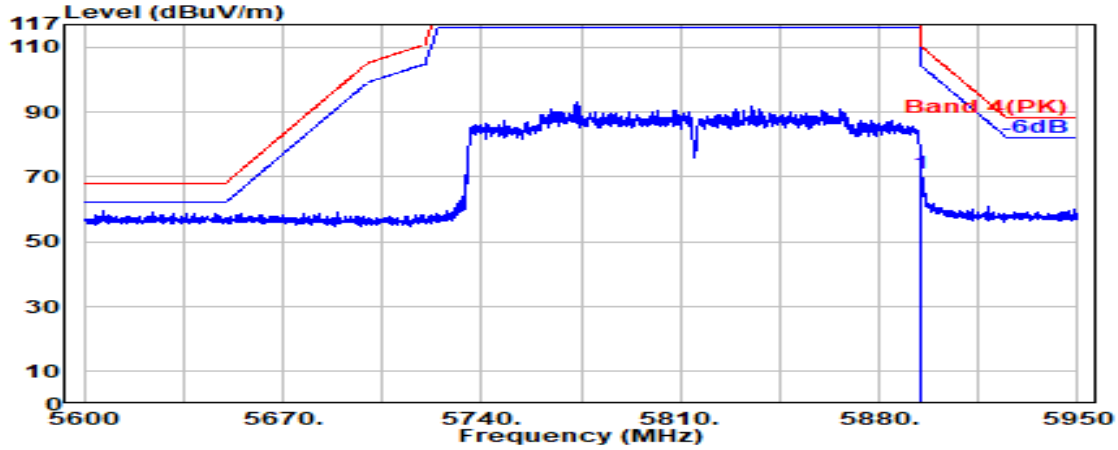

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	67.29	71.12	110.16	39.04	Peak

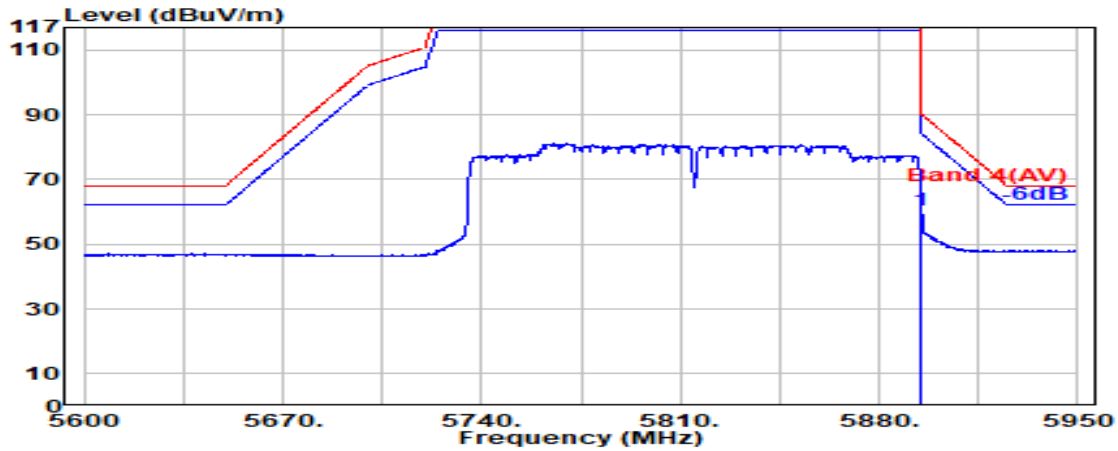


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	56.48	60.31	90.16	29.85	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT160	U-NII Band	4
		Frequency	TX 5815MHz

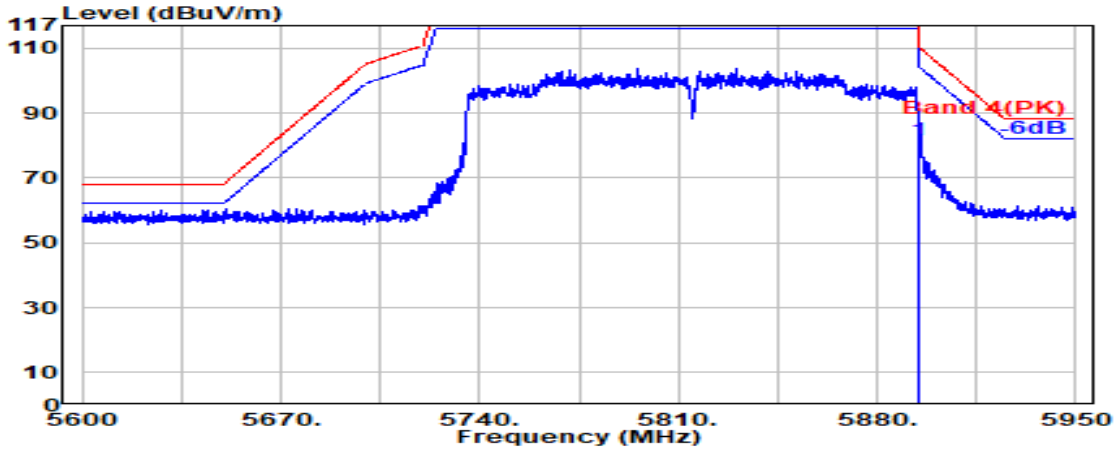

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	77.87	81.70	110.16	28.46	Peak

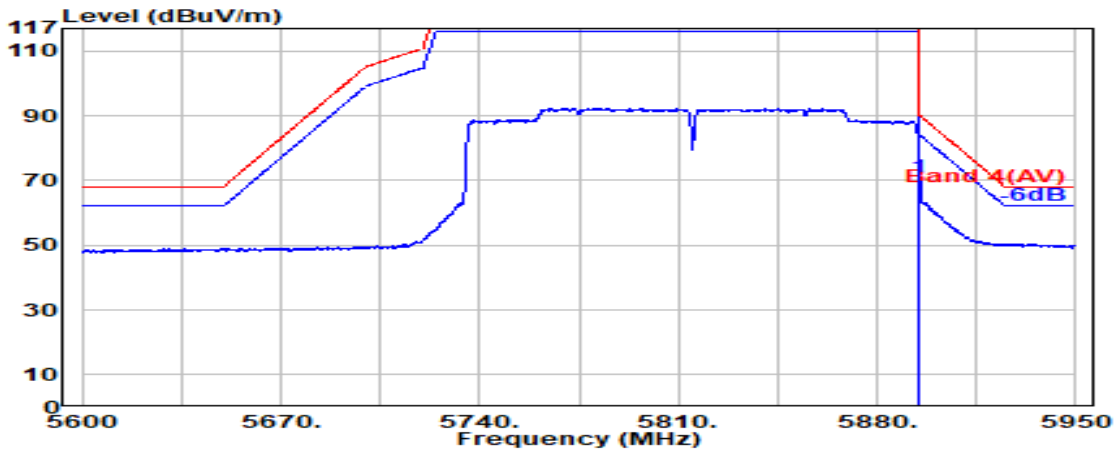


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.32	67.13	70.96	90.16	19.20	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

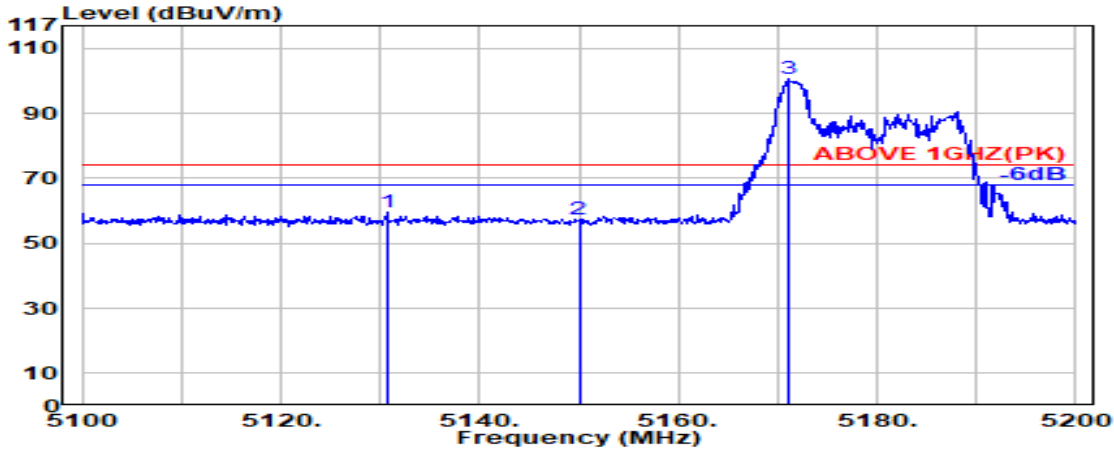

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.700	33.46	8.35	39.19	56.87	59.49	74.00	14.51	Peak
5150.000	33.50	8.37	39.19	54.74	57.42	74.00	16.58	Peak
@ 5171.000	33.63	8.40	39.19	97.81	100.64	---	---	Peak

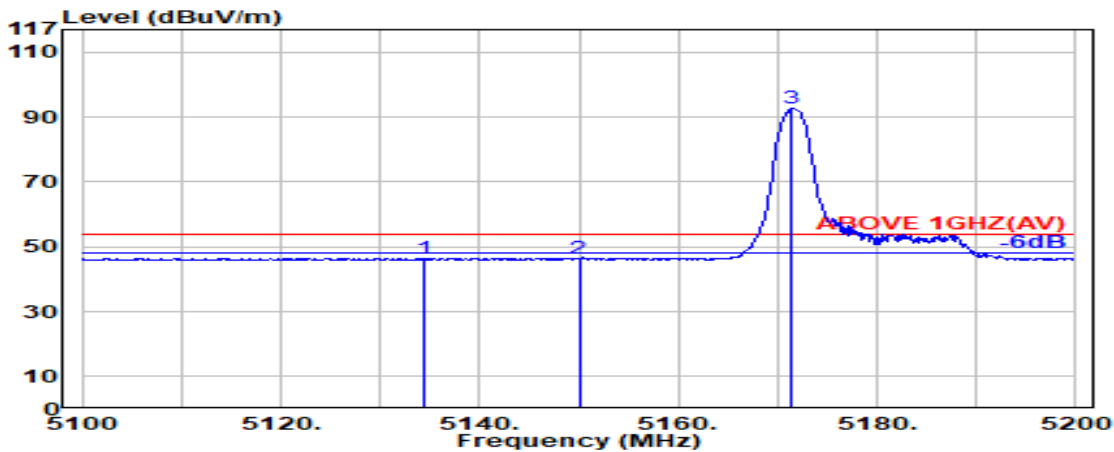


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.400	33.47	8.36	39.19	43.73	46.37	54.00	7.63	Peak
5150.000	33.50	8.37	39.19	43.65	46.34	54.00	7.66	Peak
@ 5171.400	33.63	8.40	39.19	89.83	92.67	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

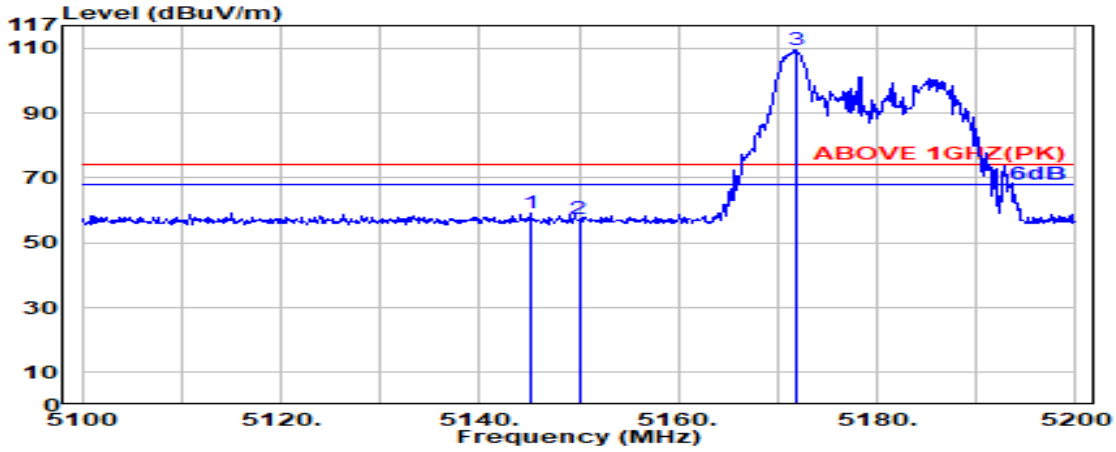

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	33.49	8.37	39.19	56.37	59.04	74.00	14.96	Peak
5150.000	33.50	8.37	39.19	54.53	57.21	74.00	16.79	Peak
@ 5172.000	33.63	8.40	39.19	106.71	109.55	---	---	Peak

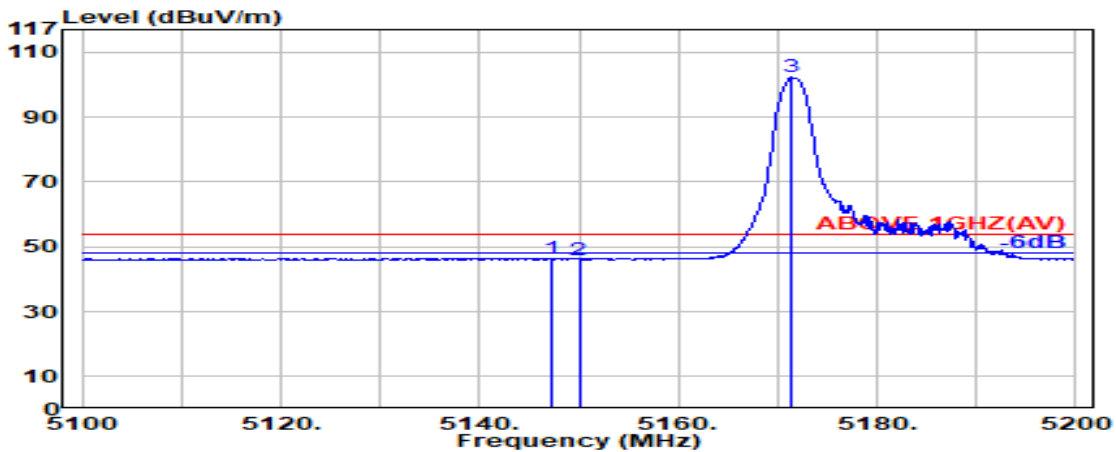


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.49	8.37	39.19	43.77	46.44	54.00	7.56	Average
5150.000	33.50	8.37	39.19	43.43	46.12	54.00	7.88	Average
@ 5171.400	33.63	8.40	39.19	99.51	102.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

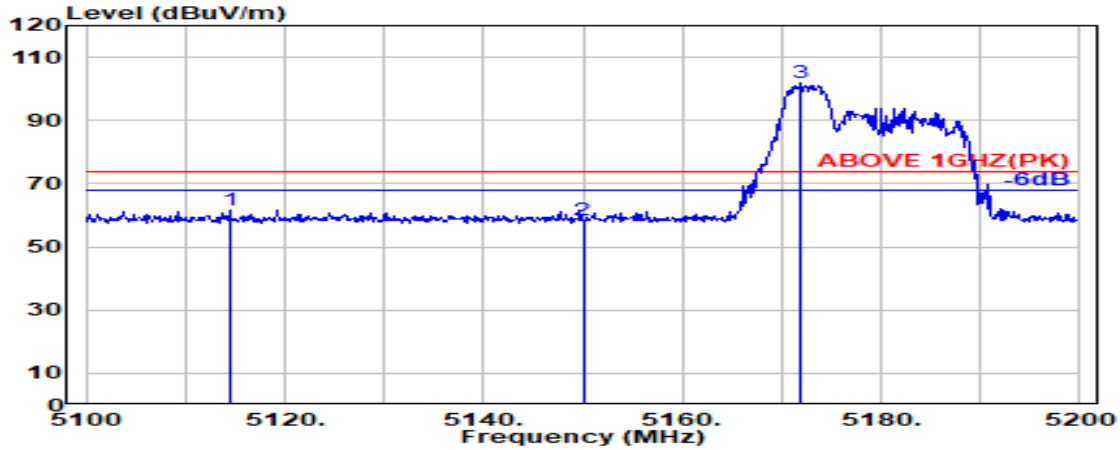

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.500	33.43	8.34	39.20	59.04	61.61	74.00	12.39	Peak
5150.000	33.50	8.37	39.19	55.58	58.26	74.00	15.74	Peak
@ 5172.000	33.63	8.40	39.19	98.96	101.80	---	---	Peak

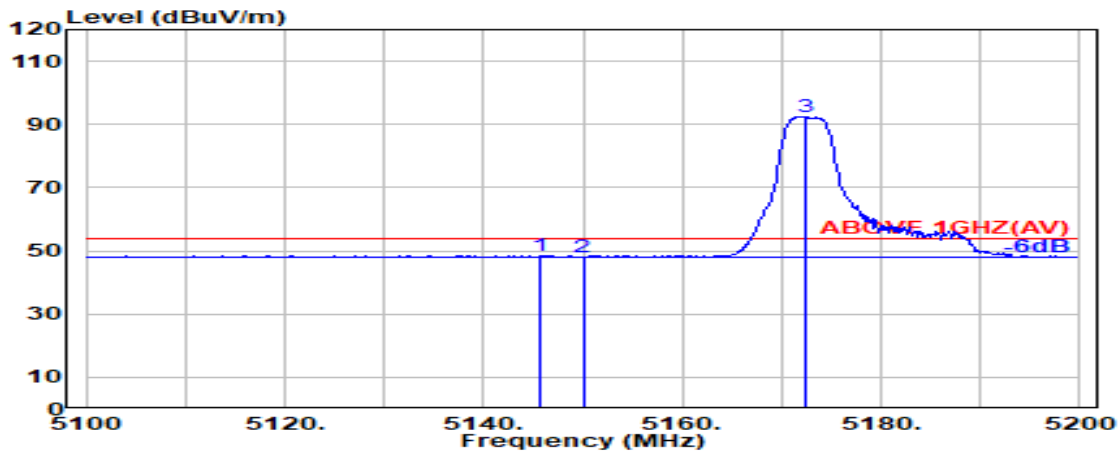


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.49	8.37	39.19	45.89	48.56	54.00	5.44	Average
5150.000	33.50	8.37	39.19	45.40	48.08	54.00	5.92	Average
@ 5172.500	33.64	8.40	39.19	89.68	92.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

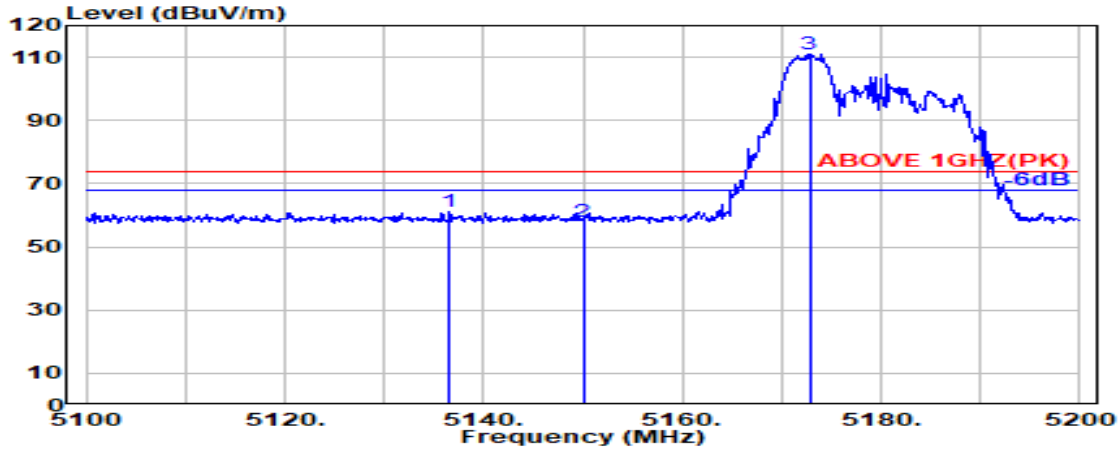

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.500	33.47	8.36	39.19	58.35	60.99	74.00	13.01	Peak
5150.000	33.50	8.37	39.19	55.41	58.09	74.00	15.91	Peak
@ 5172.800	33.64	8.40	39.19	108.16	111.00	--	---	Peak

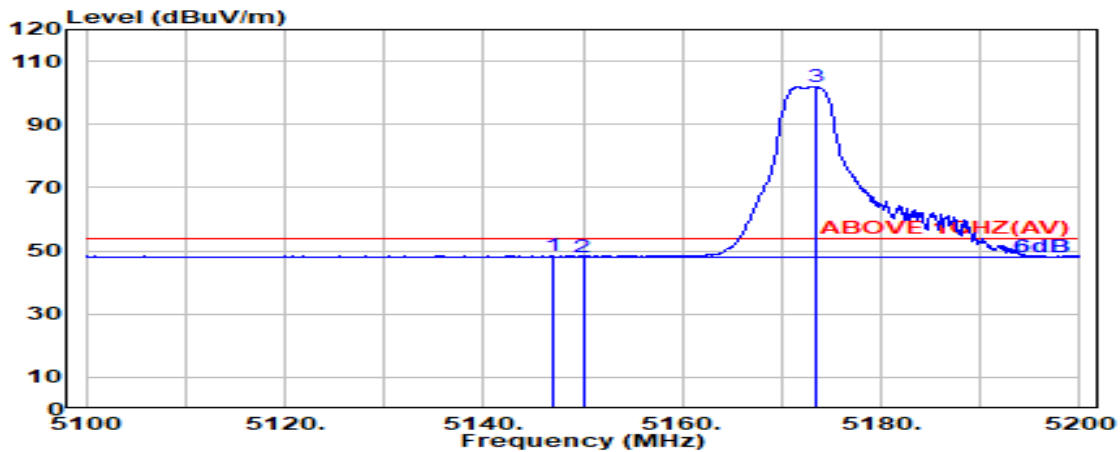


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.49	8.37	39.19	45.74	48.42	54.00	5.58	Average
5150.000	33.50	8.37	39.19	45.54	48.22	54.00	5.78	Average
@ 5173.400	33.64	8.40	39.19	99.22	102.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

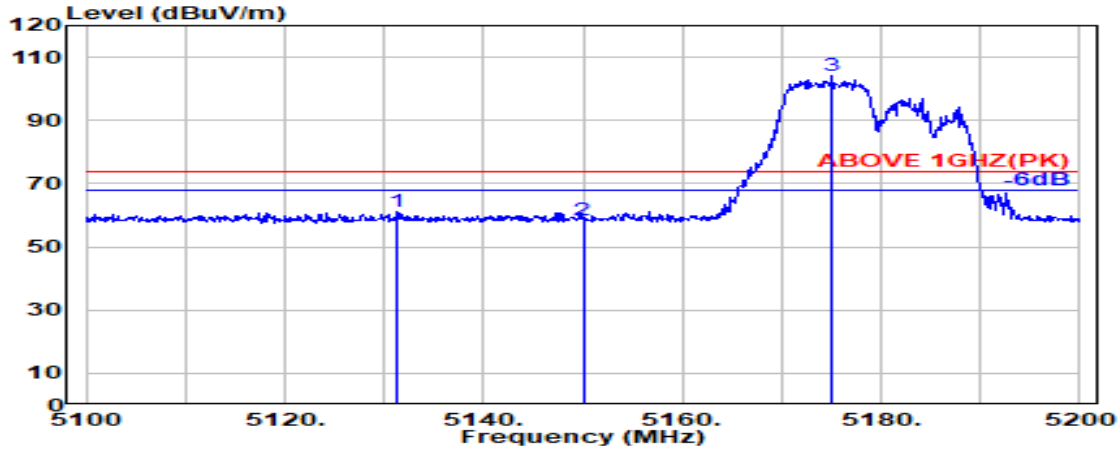

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.400	33.46	8.36	39.19	58.35	60.97	74.00	13.03	Peak
5150.000	33.50	8.37	39.19	55.60	58.28	74.00	15.72	Peak
@ 5175.000	33.65	8.40	39.19	101.47	104.33	---	---	Peak

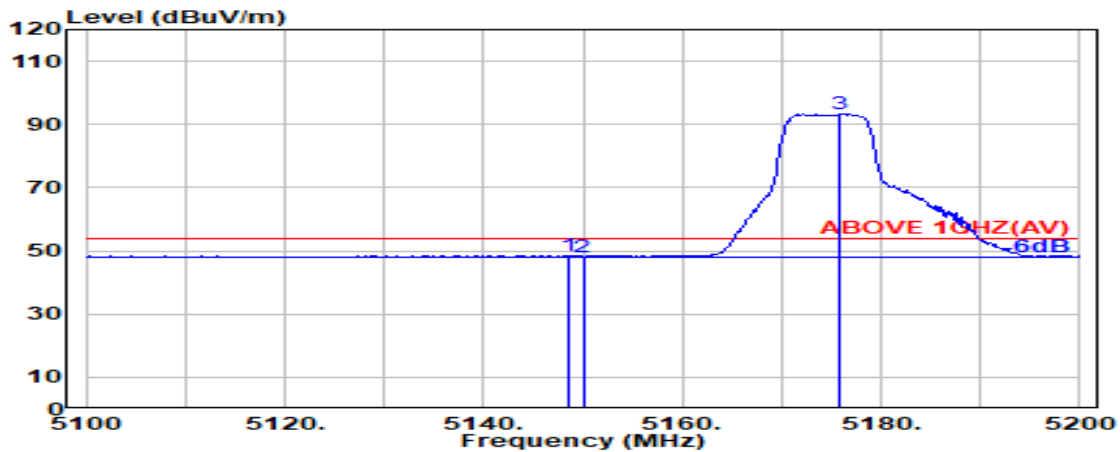


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.50	8.37	39.19	45.76	48.44	54.00	5.56	Average
5150.000	33.50	8.37	39.19	45.49	48.17	54.00	5.83	Average
@ 5175.900	33.66	8.40	39.19	90.32	93.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

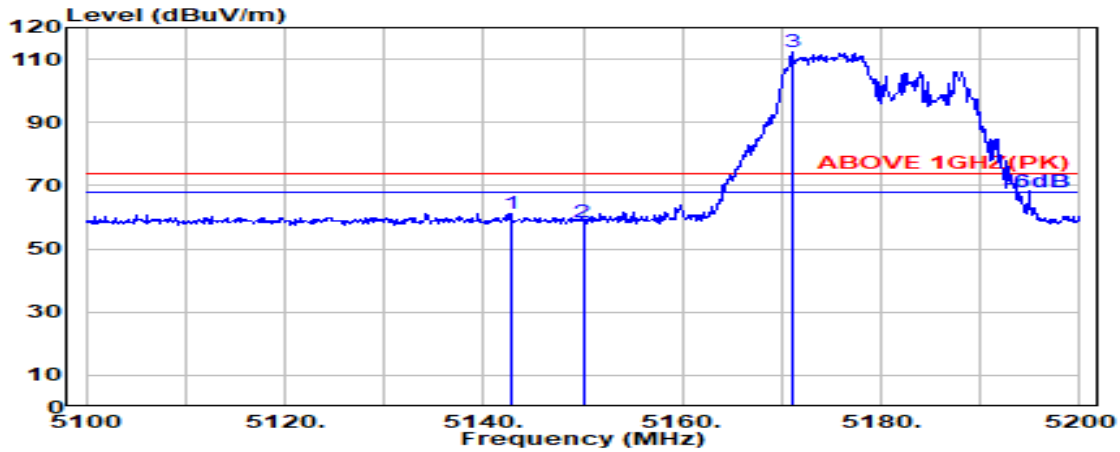

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	33.49	8.37	39.19	58.62	61.28	74.00	12.72	Peak
5150.000	33.50	8.37	39.19	55.75	58.43	74.00	15.57	Peak
@ 5171.000	33.63	8.40	39.19	109.51	112.35	---	---	Peak

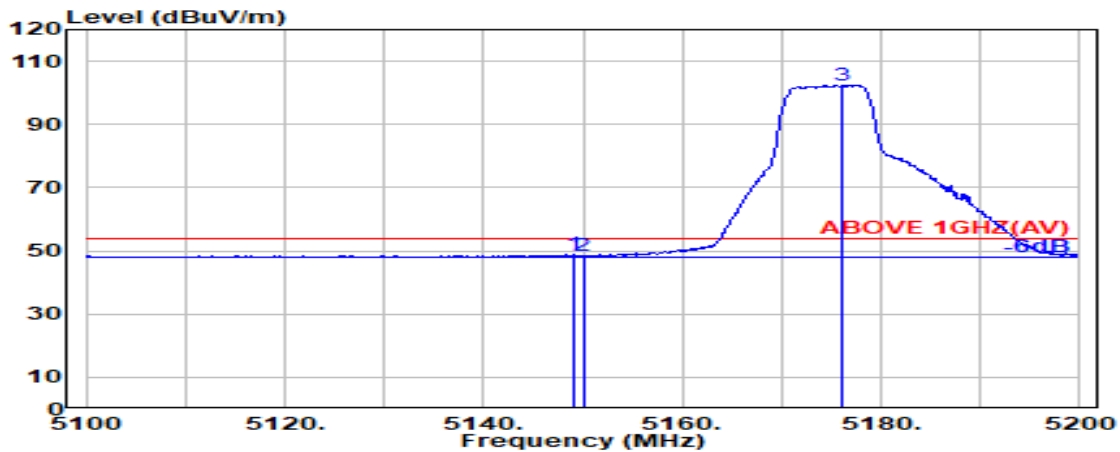


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	46.25	48.93	54.00	5.07	Average
5150.000	33.50	8.37	39.19	45.65	48.33	54.00	5.67	Average
@ 5176.100	33.66	8.40	39.19	99.48	102.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

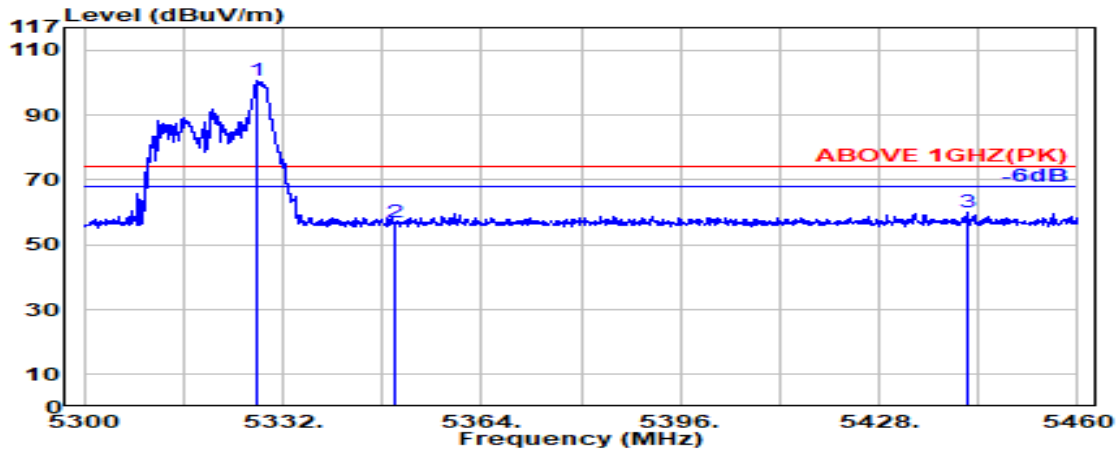

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.800	33.74	8.55	39.17	97.33	100.46	---	---	Peak
5350.000	33.70	8.57	39.17	53.73	56.84	74.00	17.16	Peak
5442.200	33.98	8.66	39.16	56.43	59.92	74.00	14.08	Peak

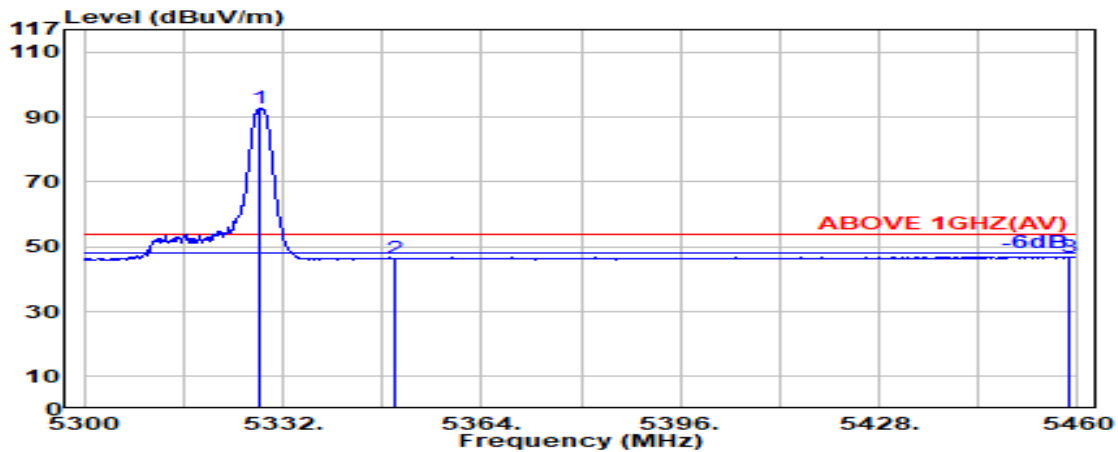


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.400	33.74	8.55	39.17	89.79	92.92	---	---	Average
5350.000	33.70	8.57	39.17	43.18	46.29	54.00	7.71	Average
5458.700	34.02	8.68	39.15	43.41	46.95	54.00	7.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

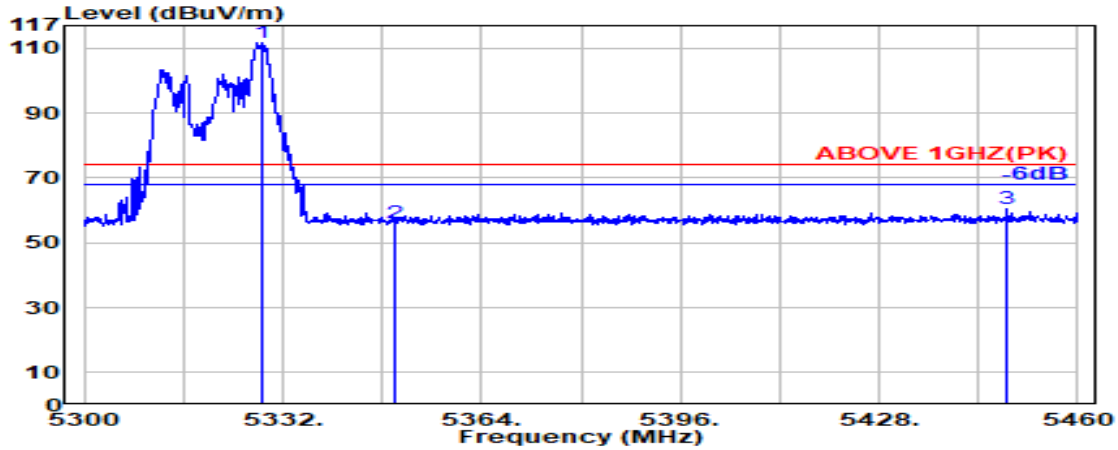

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.74	8.55	39.17	108.58	111.71	---	---	Peak
5350.000	33.70	8.57	39.17	52.80	55.91	74.00	18.09	Peak
5448.700	34.00	8.67	39.16	56.95	60.46	74.00	13.54	Peak

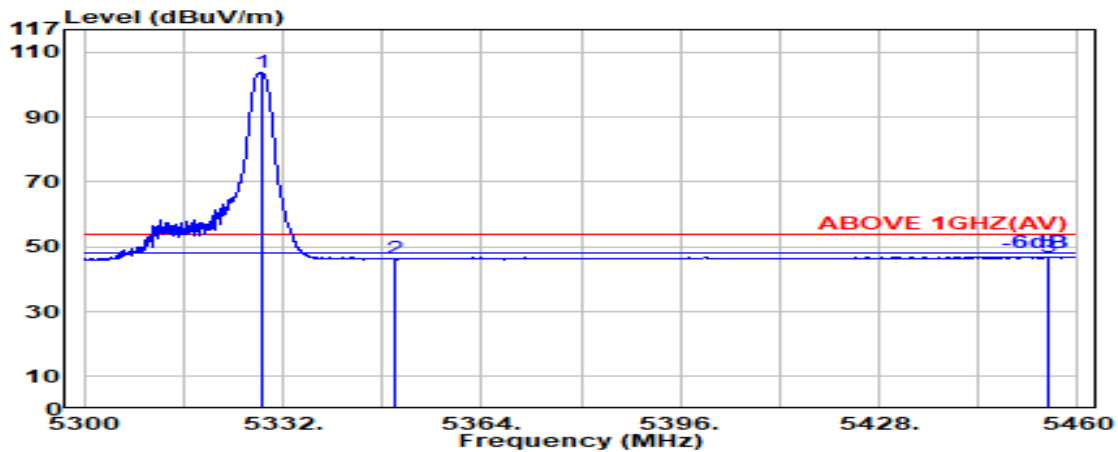


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.74	8.55	39.17	100.69	103.82	---	---	Average
5350.000	33.70	8.57	39.17	43.12	46.22	54.00	7.78	Average
5455.200	34.01	8.67	39.16	43.48	47.01	54.00	6.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

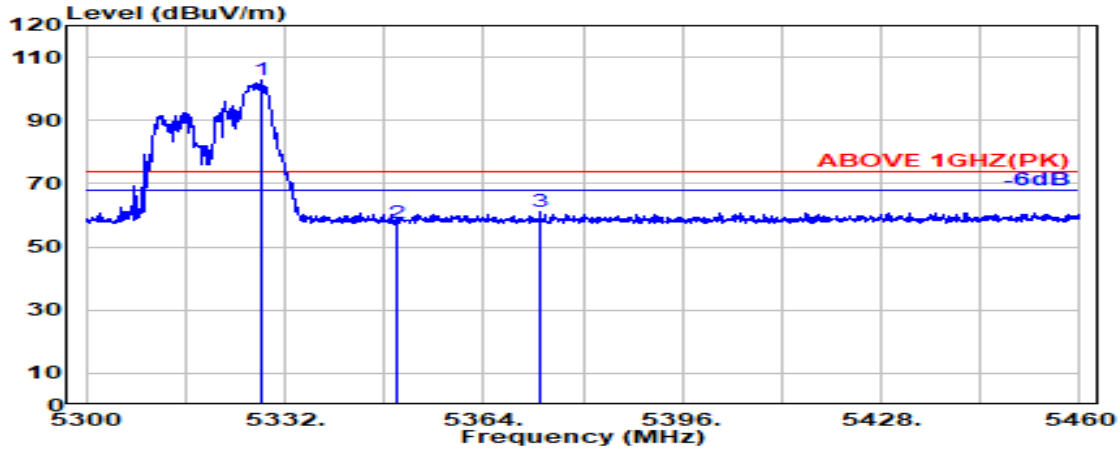

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	33.74	8.55	39.17	99.77	102.89	--	---	Peak
5350.000	33.70	8.57	39.17	54.45	57.56	74.00	16.44	Peak
5373.000	33.79	8.59	39.16	57.79	61.01	74.00	12.99	Peak

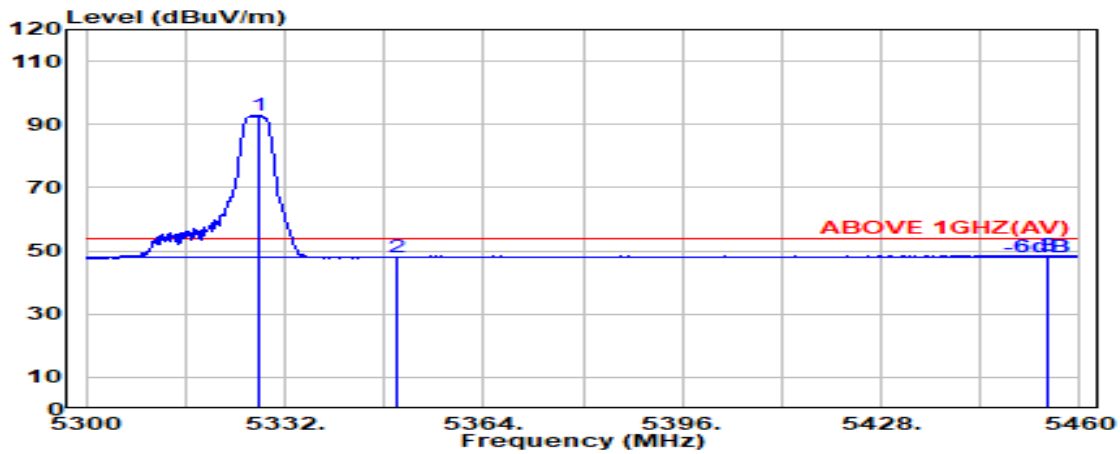


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.74	8.55	39.17	89.74	92.87	---	---	Average
5350.000	33.70	8.57	39.17	44.88	47.98	54.00	6.02	Average
5454.800	34.01	8.67	39.16	45.12	48.64	54.00	5.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

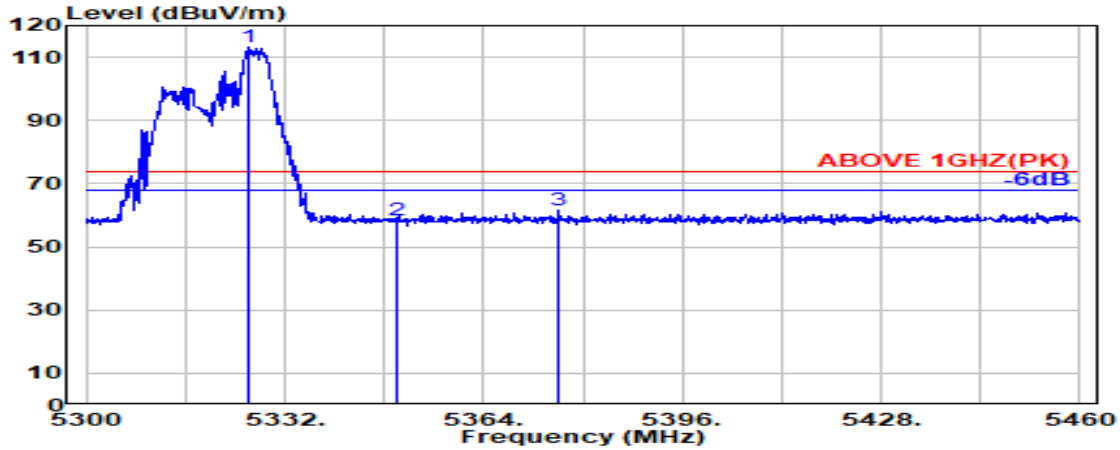

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.000	33.75	8.55	39.17	110.23	113.36	--	---	Peak
5350.000	33.70	8.57	39.17	55.37	58.48	74.00	15.52	Peak
5376.100	33.80	8.60	39.16	58.36	61.59	74.00	12.41	Peak

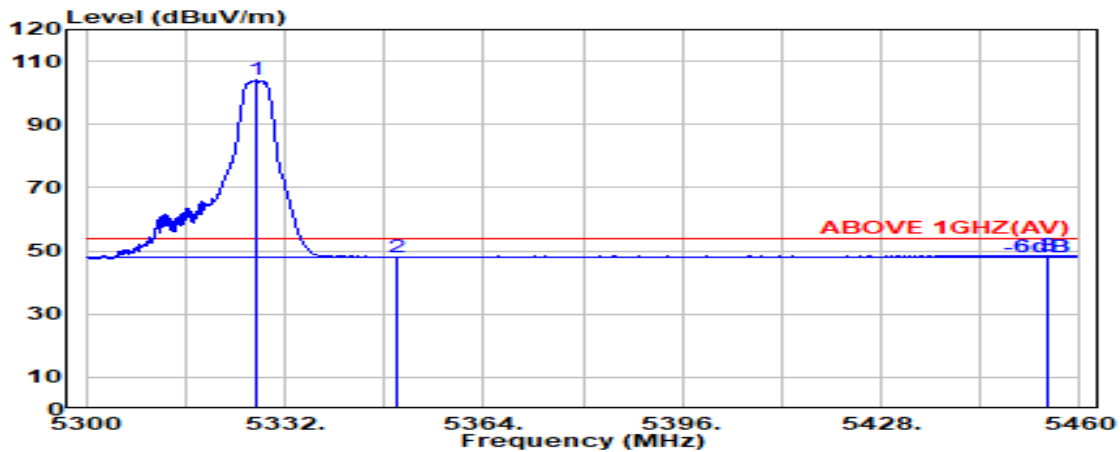


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.400	33.75	8.55	39.17	100.81	103.94	---	---	Average
5350.000	33.70	8.57	39.17	44.97	48.07	54.00	5.93	Average
5454.800	34.01	8.67	39.16	45.10	48.63	54.00	5.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

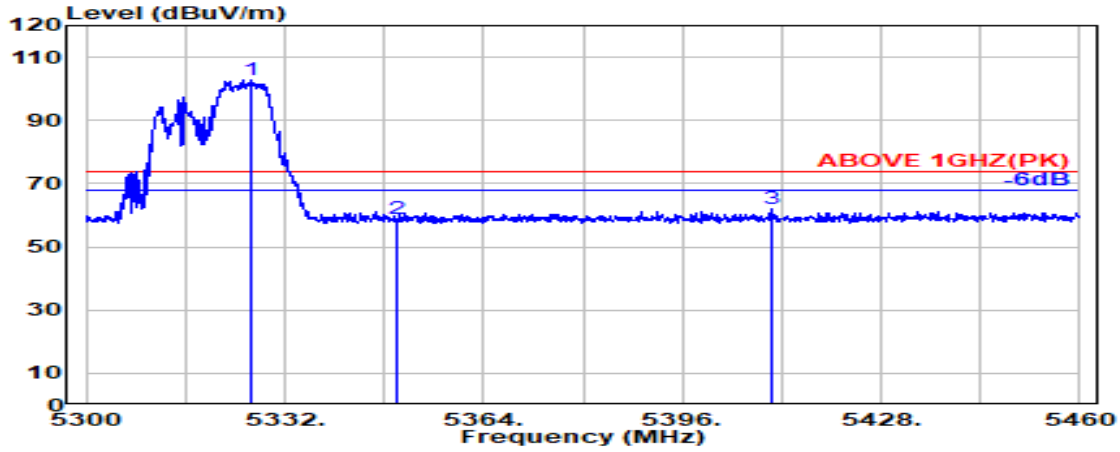

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.500	33.75	8.55	39.17	99.89	103.01	---	---	Peak
5350.000	33.70	8.57	39.17	55.85	58.96	74.00	15.04	Peak
5410.200	33.92	8.63	39.16	58.62	62.01	74.00	11.99	Peak

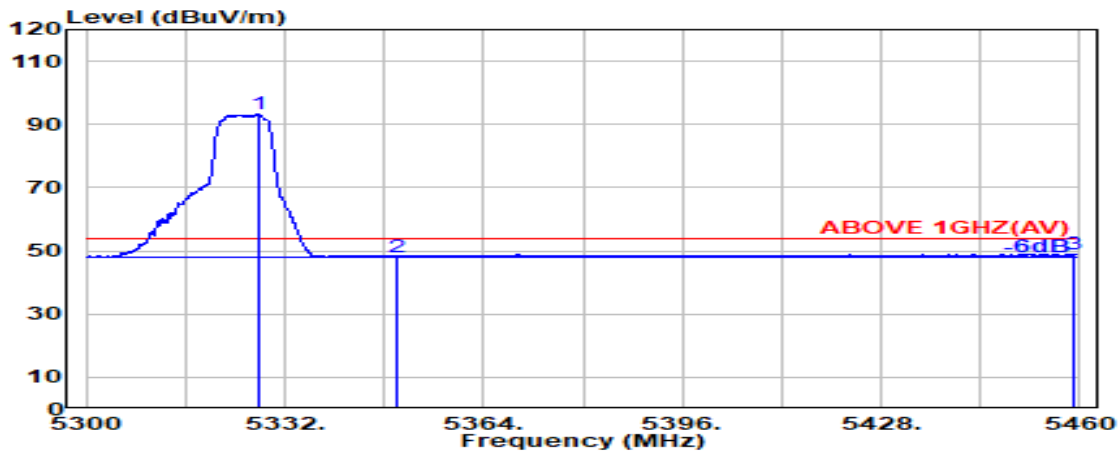


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.74	8.55	39.17	90.11	93.23	---	---	Average
5350.000	33.70	8.57	39.17	45.07	48.18	54.00	5.82	Average
5459.200	34.02	8.68	39.15	45.46	49.00	54.00	5.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

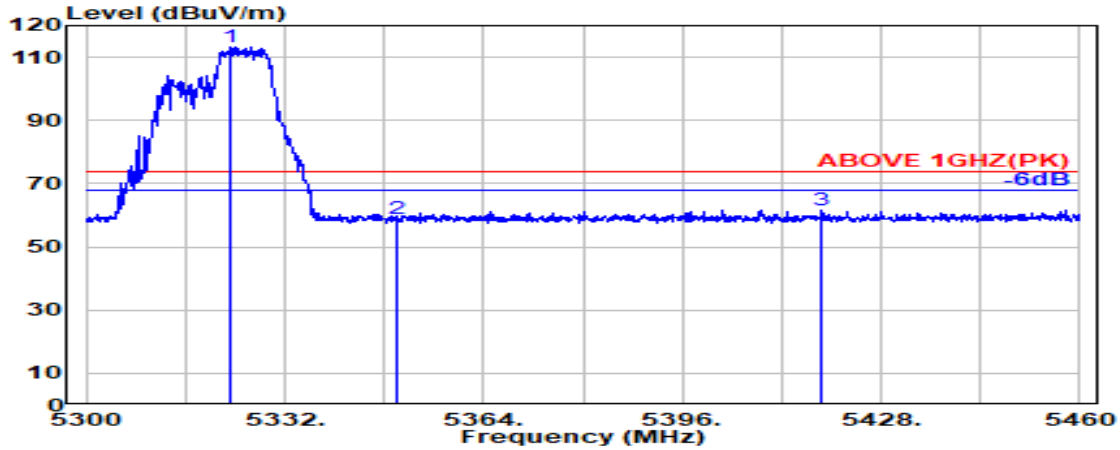

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.75	8.55	39.17	110.24	113.37	---	---	Peak
5350.000	33.70	8.57	39.17	55.91	59.01	74.00	14.99	Peak
5418.500	33.94	8.64	39.16	58.18	61.60	74.00	12.40	Peak

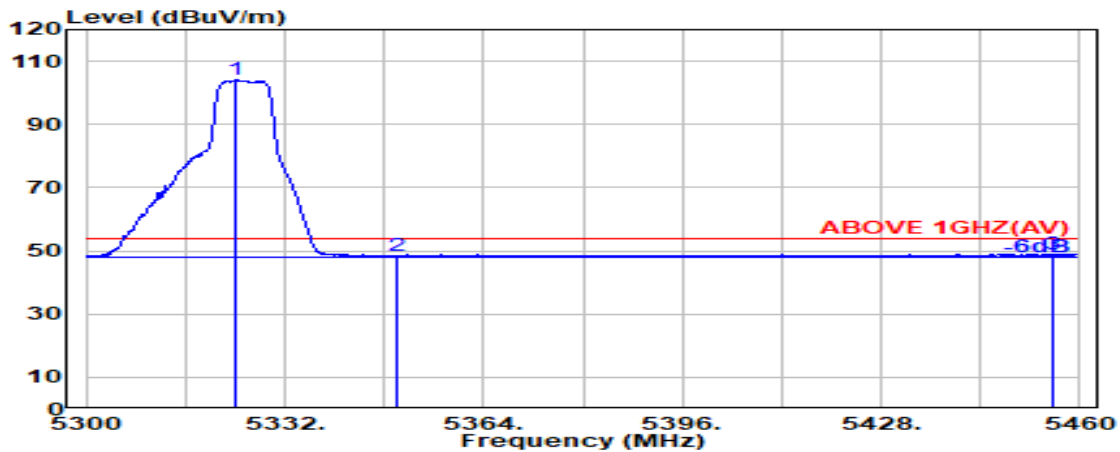


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	33.75	8.55	39.17	100.84	103.97	---	---	Average
5350.000	33.70	8.57	39.17	45.42	48.53	54.00	5.47	Average
5455.800	34.01	8.67	39.16	45.39	48.92	54.00	5.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

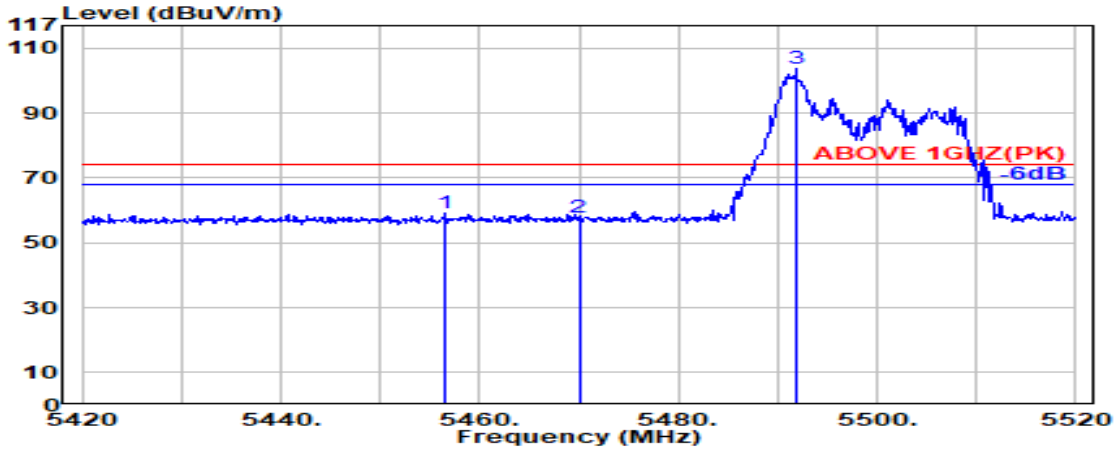

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.500	34.01	8.68	39.16	55.76	59.29	74.00	14.71	Peak
5470.000	34.04	8.69	39.15	54.21	57.79	74.00	16.21	Peak
@ 5491.900	34.08	8.71	39.15	99.97	103.61	---	---	Peak

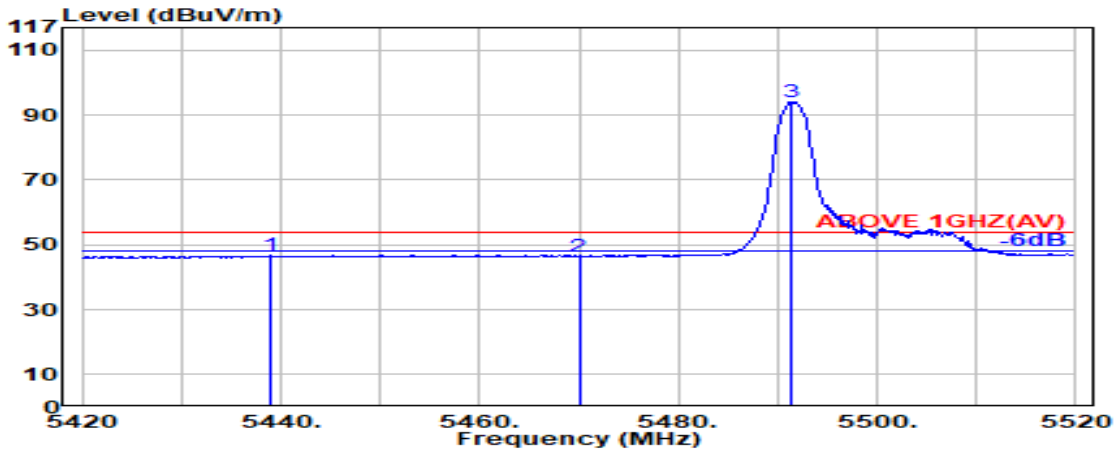


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.900	33.98	8.66	39.16	43.44	46.92	54.00	7.08	Average
5470.000	34.04	8.69	39.15	42.87	46.45	54.00	7.55	Average
@ 5491.300	34.08	8.71	39.15	90.38	94.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

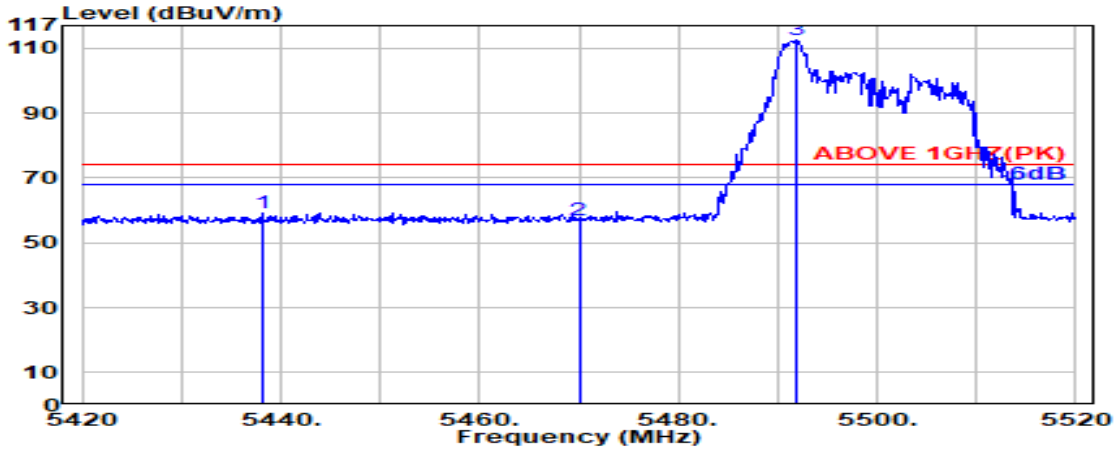

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.100	33.98	8.66	39.16	55.88	59.36	74.00	14.64	Peak
5470.000	34.04	8.69	39.15	53.58	57.16	74.00	16.84	Peak
@ 5491.800	34.08	8.71	39.15	108.77	112.41	---	---	Peak

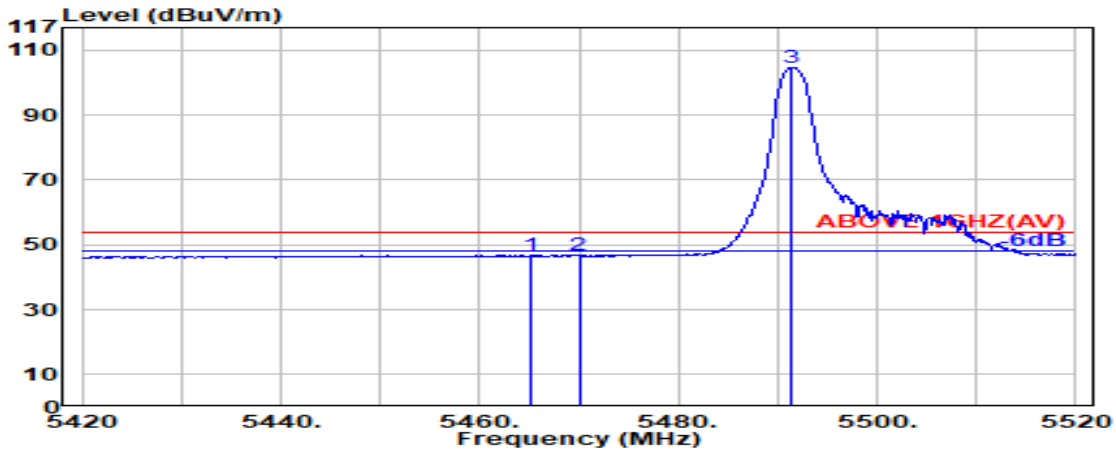


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.03	8.68	39.15	43.22	46.78	54.00	7.22	Average
5470.000	34.04	8.69	39.15	43.14	46.71	54.00	7.29	Average
@ 5491.400	34.08	8.71	39.15	101.05	104.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

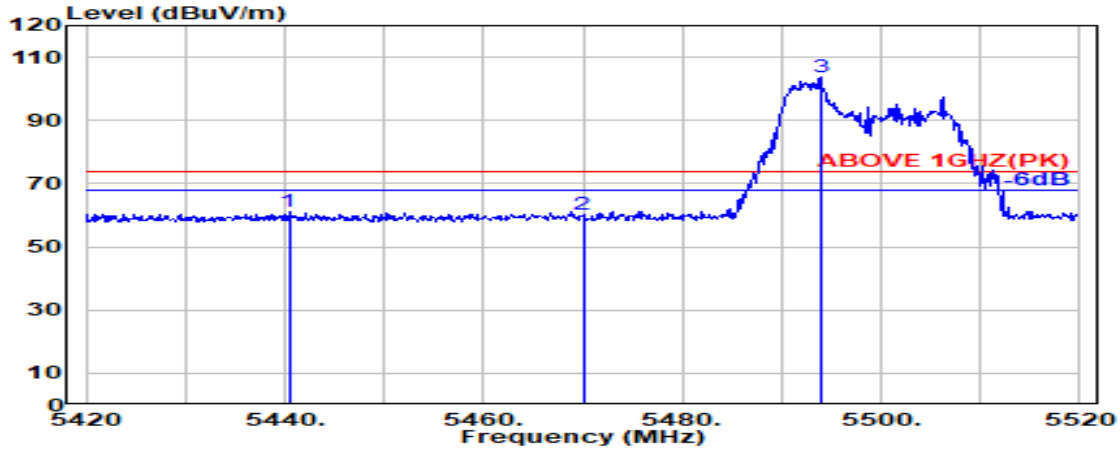

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.400	33.98	8.66	39.16	57.59	61.07	74.00	12.93	Peak
5470.000	34.04	8.69	39.15	56.46	60.03	74.00	13.97	Peak
@ 5493.900	34.09	8.71	39.15	99.89	103.54	---	---	Peak

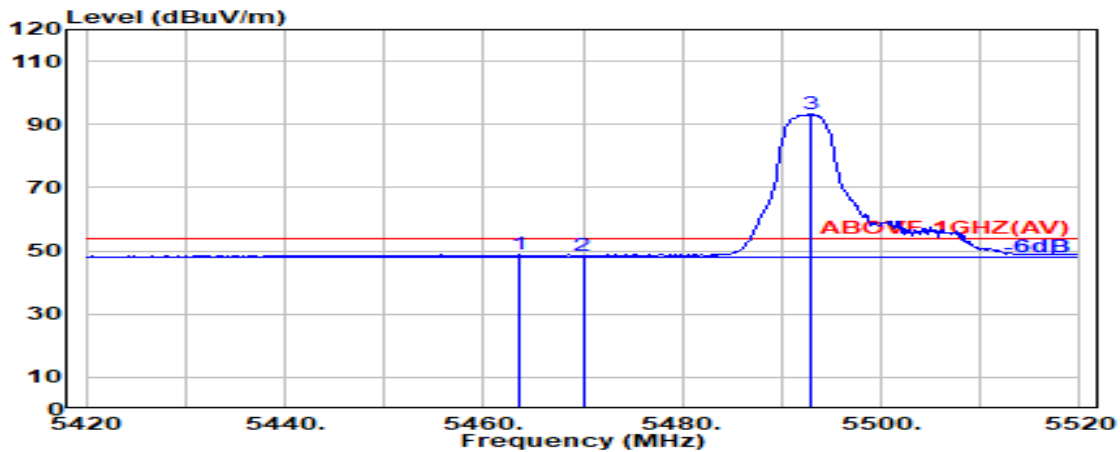


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.700	34.03	8.68	39.15	45.18	48.73	54.00	5.27	Average
5470.000	34.04	8.69	39.15	44.90	48.47	54.00	5.53	Average
@ 5493.000	34.09	8.71	39.15	89.51	93.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

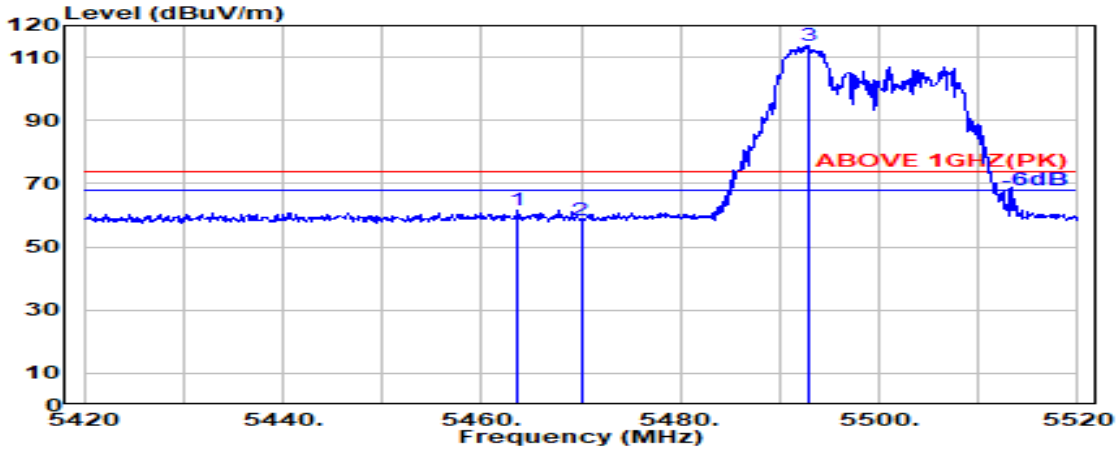

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.600	34.03	8.68	39.15	58.04	61.59	74.00	12.41	Peak
5470.000	34.04	8.69	39.15	54.92	58.50	74.00	15.50	Peak
@ 5493.000	34.09	8.71	39.15	110.09	113.73	---	---	Peak

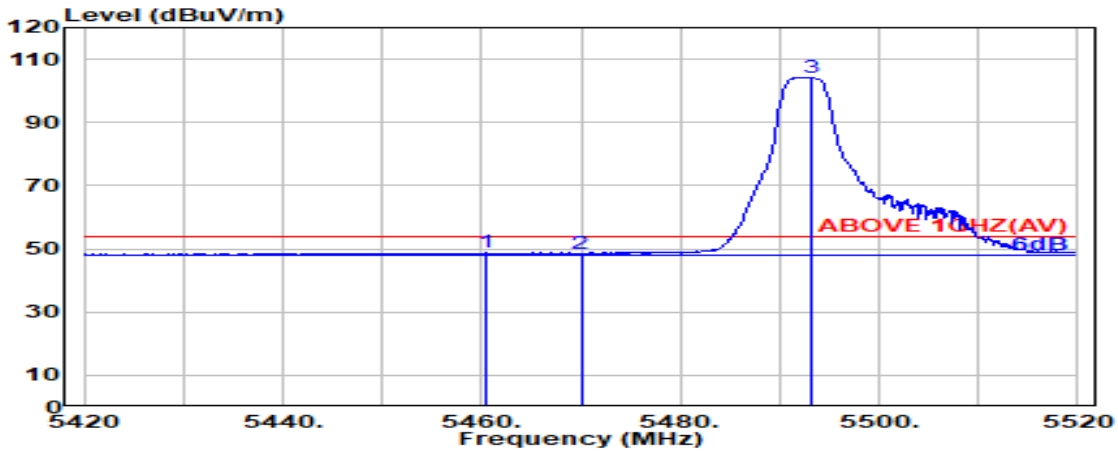


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	34.02	8.68	39.15	45.16	48.70	54.00	5.30	Peak
5470.000	34.04	8.69	39.15	44.96	48.54	54.00	5.46	Peak
@ 5493.200	34.09	8.71	39.15	100.71	104.35	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

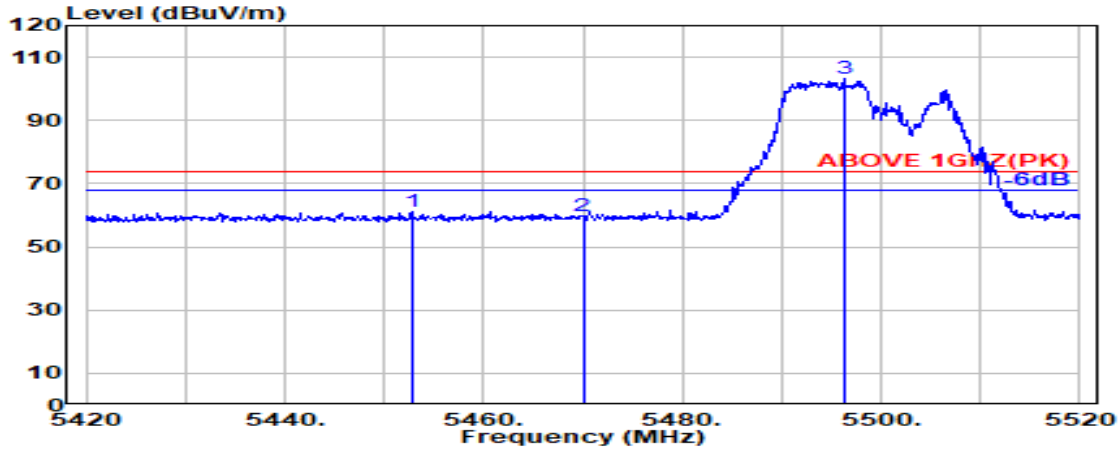

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.800	34.01	8.67	39.16	57.53	61.05	74.00	12.95	Peak
5470.000	34.04	8.69	39.15	56.23	59.81	74.00	14.19	Peak
@ 5496.300	34.09	8.71	39.15	99.46	103.11	---	---	Peak

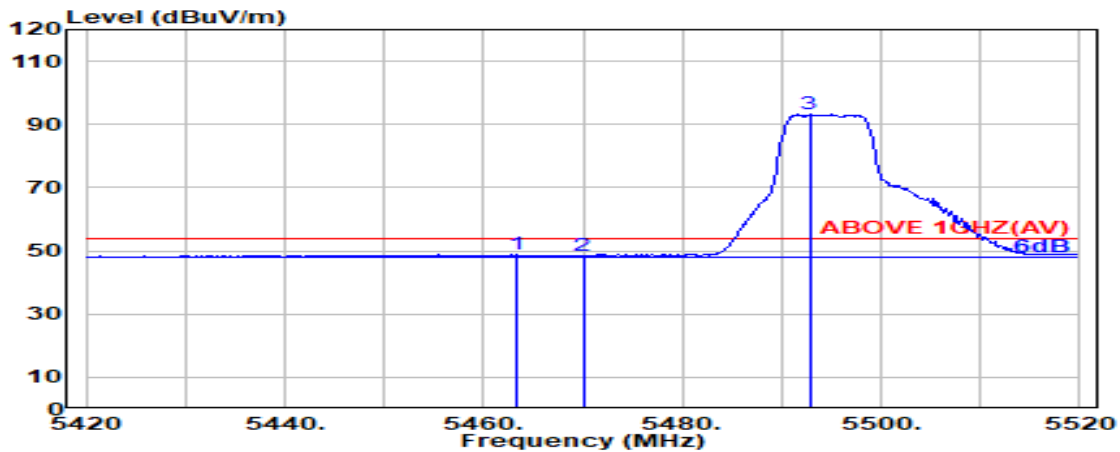


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.03	8.68	39.15	45.20	48.76	54.00	5.24	Average
5470.000	34.04	8.69	39.15	44.91	48.48	54.00	5.52	Average
@ 5492.800	34.09	8.71	39.15	89.64	93.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

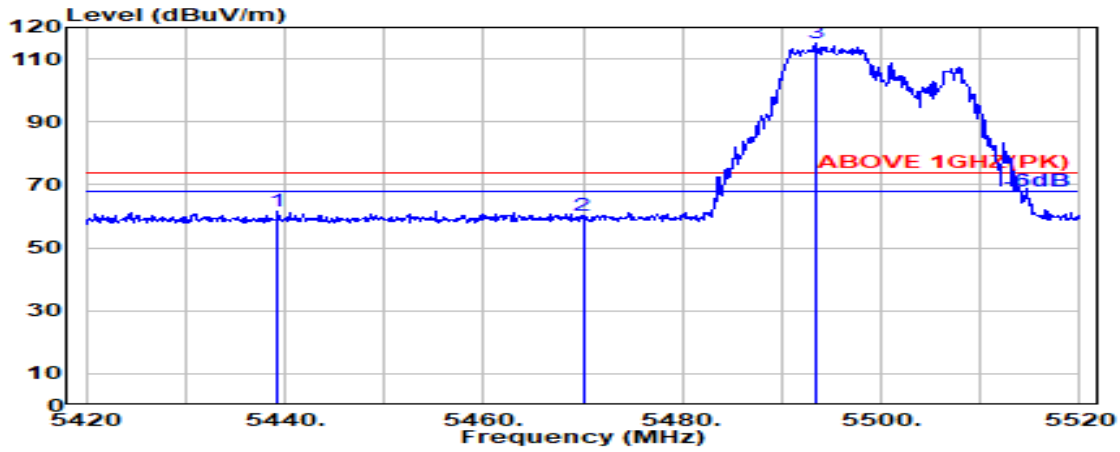

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.300	33.98	8.66	39.16	58.27	61.75	74.00	12.25	Peak
5470.000	34.04	8.69	39.15	56.73	60.30	74.00	13.70	Peak
@ 5493.500	34.09	8.71	39.15	111.30	114.95	---	---	Peak

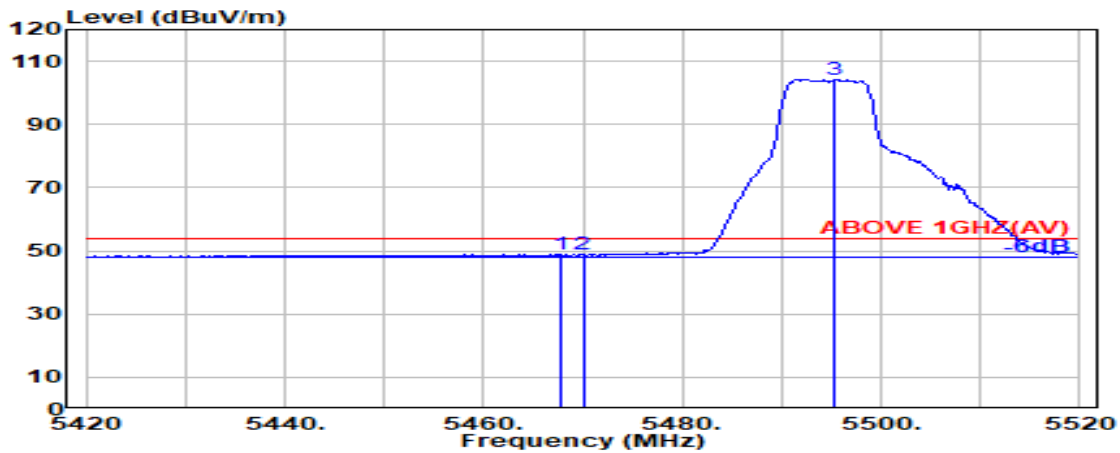


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.15	45.29	48.86	54.00	5.14	Average
5470.000	34.04	8.69	39.15	45.21	48.78	54.00	5.22	Average
@ 5495.400	34.09	8.71	39.15	100.67	104.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

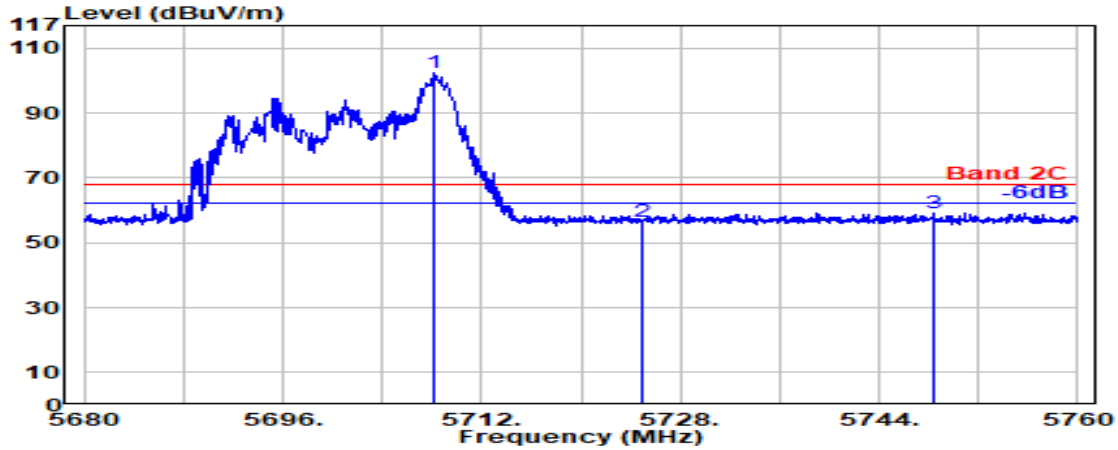

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.150	33.60	8.91	39.19	99.10	102.42	---	---	Peak
5725.000	33.60	8.93	39.20	53.14	56.47	68.20	11.73	Peak
5748.350	33.60	8.95	39.20	55.79	59.14	68.20	9.06	Peak

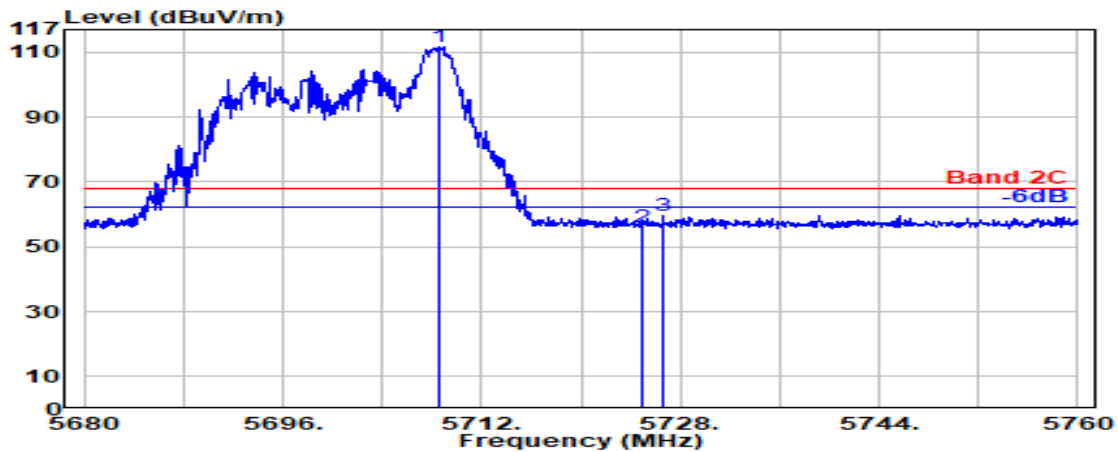


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.550	33.60	8.91	39.19	108.53	111.85	---	---	Peak
5725.000	33.60	8.93	39.20	52.86	56.19	68.20	12.01	Peak
5726.550	33.60	8.93	39.20	56.37	59.70	68.20	8.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

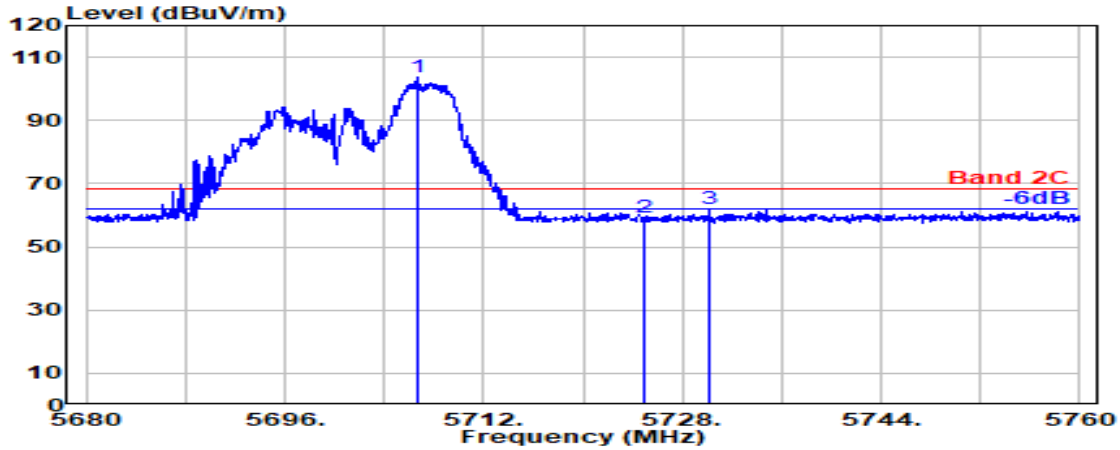

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.600	33.60	8.91	39.19	100.31	103.62	---	---	Peak
5725.000	33.60	8.93	39.20	55.90	59.23	68.20	8.97	Peak
5730.150	33.60	8.93	39.20	58.63	61.97	68.20	6.23	Peak

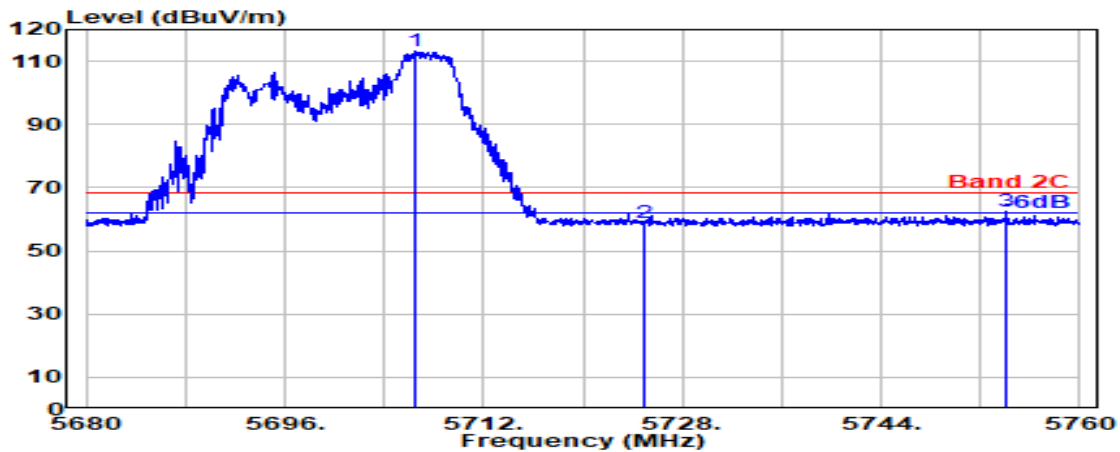


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.550	33.60	8.91	39.19	109.88	113.20	---	---	Peak
5725.000	33.60	8.93	39.20	55.62	58.95	68.20	9.25	Peak
5754.100	33.62	8.95	39.20	59.24	62.61	68.20	5.59	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

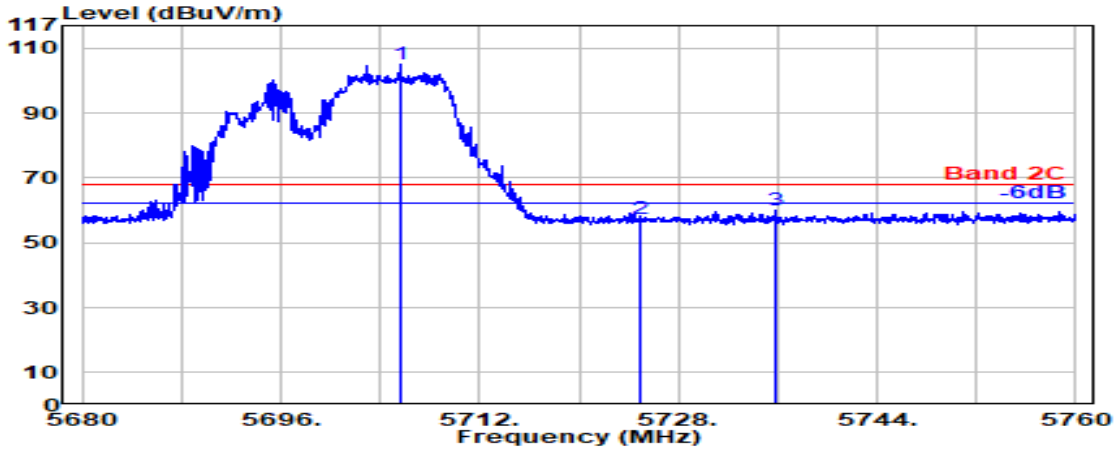

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.600	33.60	8.91	39.19	101.68	104.99	---	---	Peak
5725.000	33.60	8.93	39.20	54.11	57.44	68.20	10.76	Peak
5735.800	33.60	8.94	39.20	56.55	59.89	68.20	8.31	Peak

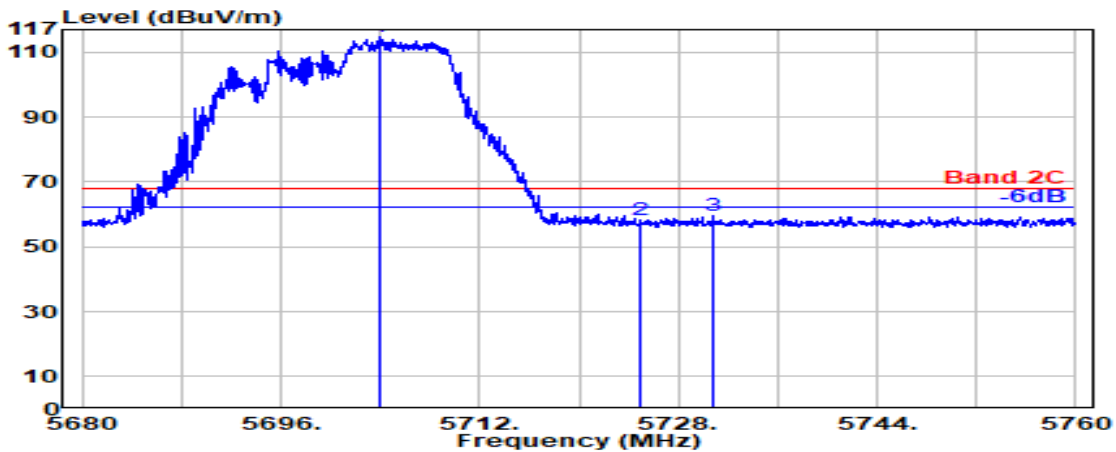


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.900	33.60	8.91	39.19	111.48	114.79	---	---	Peak
5725.000	33.60	8.93	39.20	54.96	58.29	68.20	9.91	Peak
5730.750	33.60	8.93	39.20	56.22	59.56	68.20	8.64	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

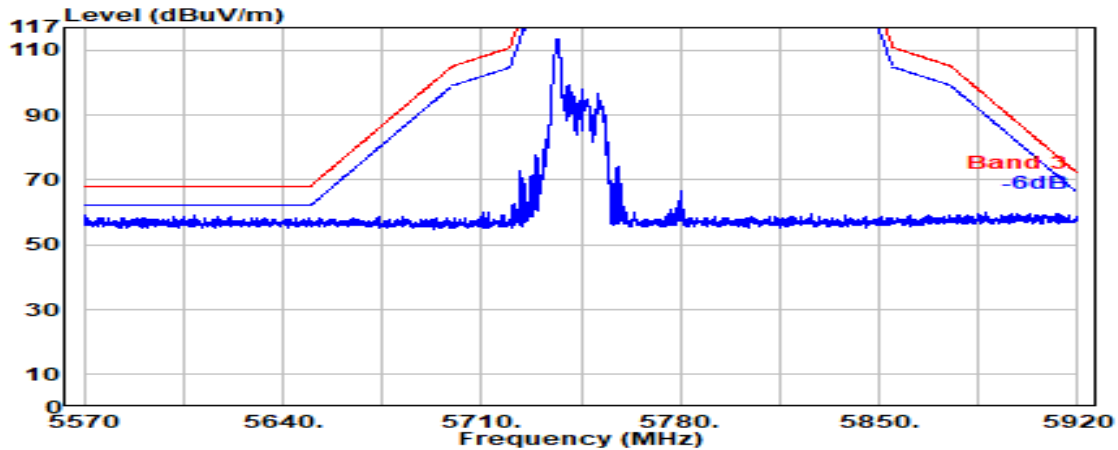


Antenna at Vertical Polarization

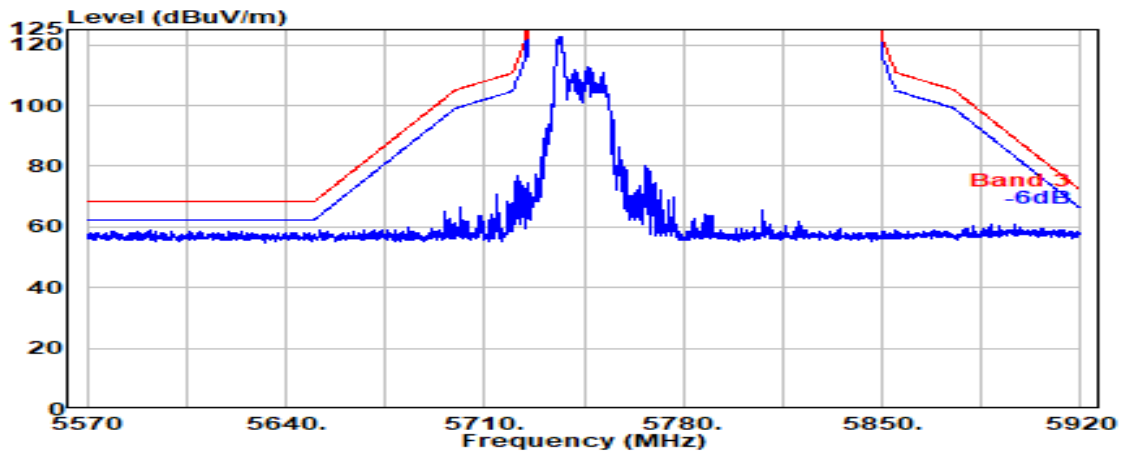


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

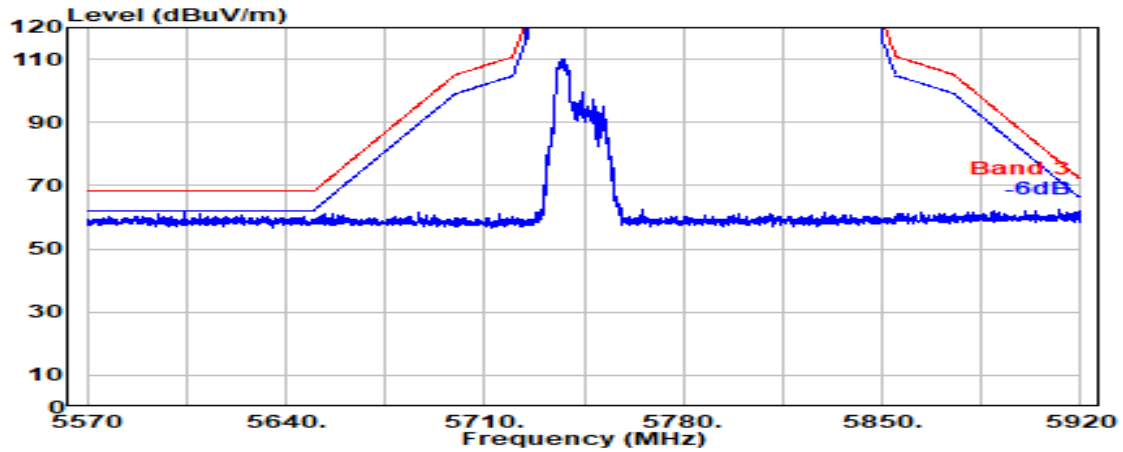


Antenna at Vertical Polarization

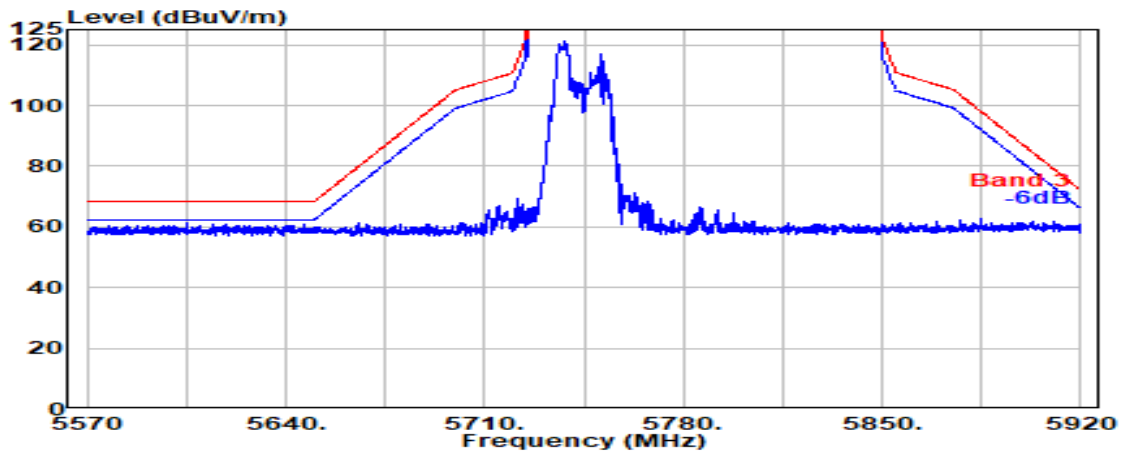


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

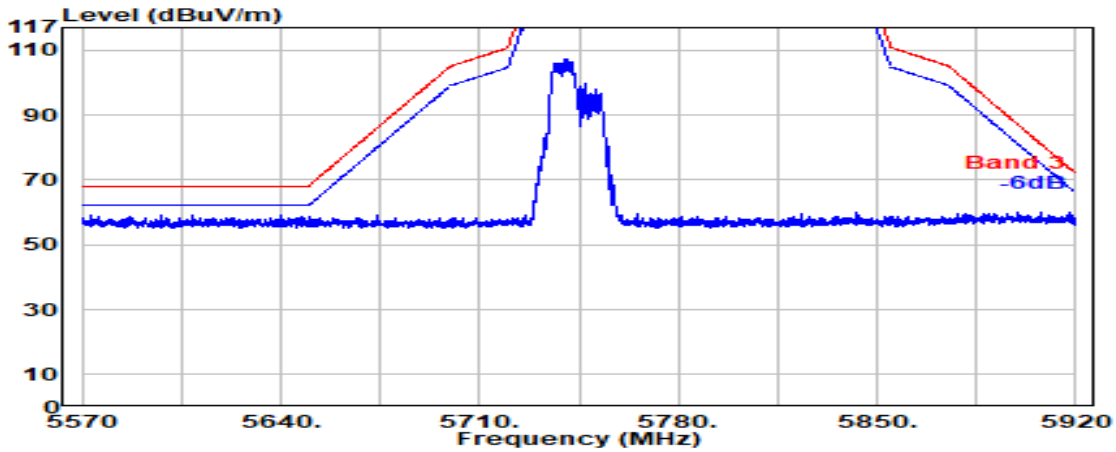


Antenna at Vertical Polarization

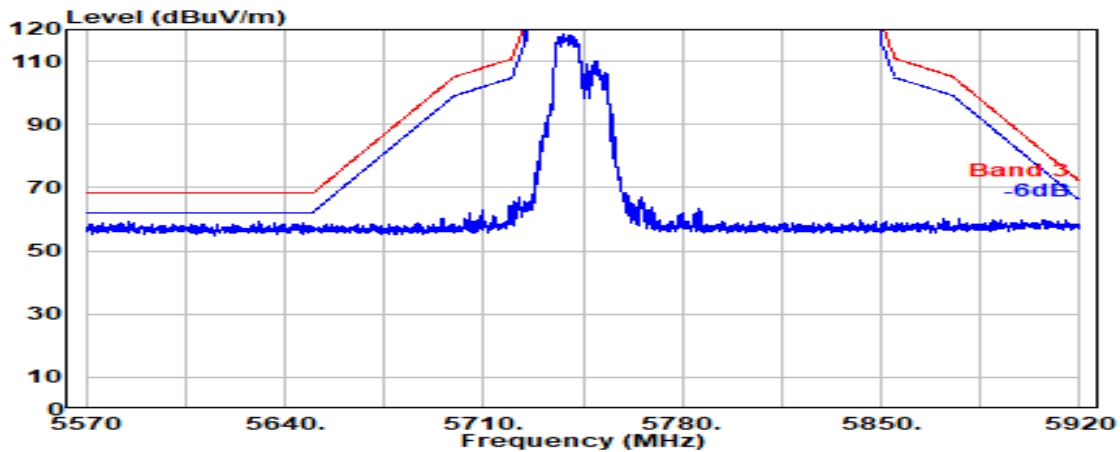


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

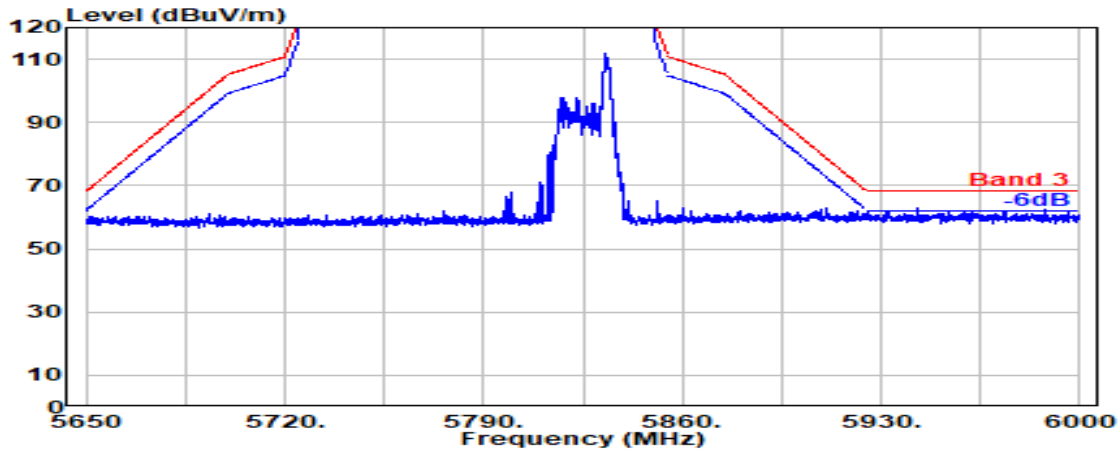


Antenna at Vertical Polarization

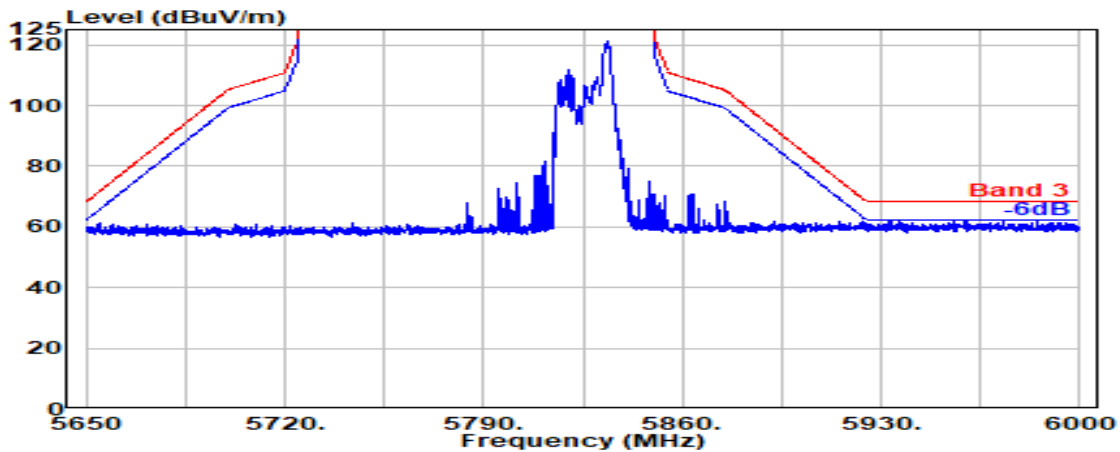


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

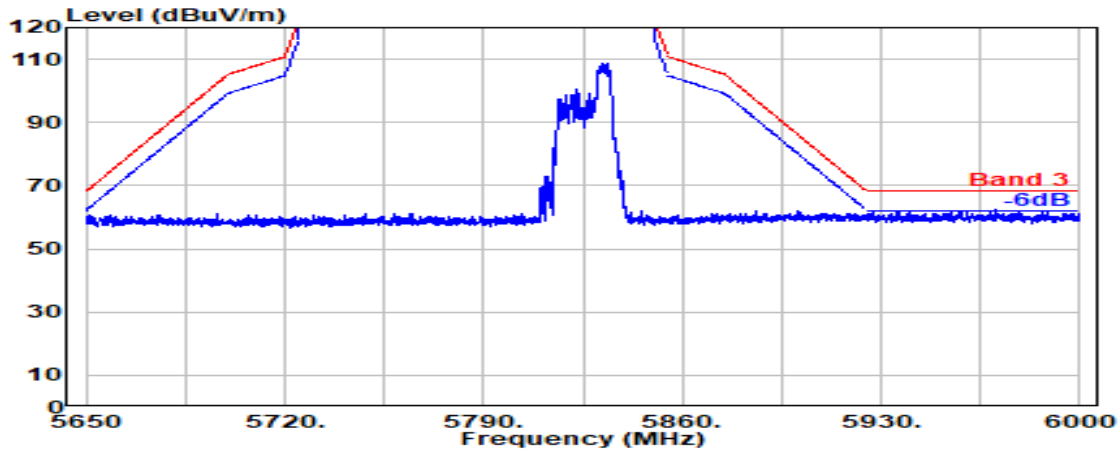


Antenna at Vertical Polarization

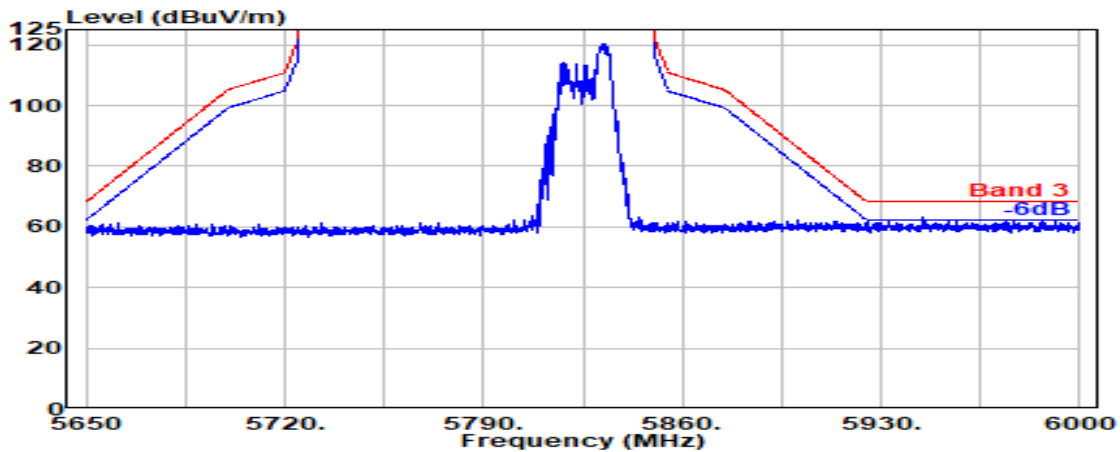


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

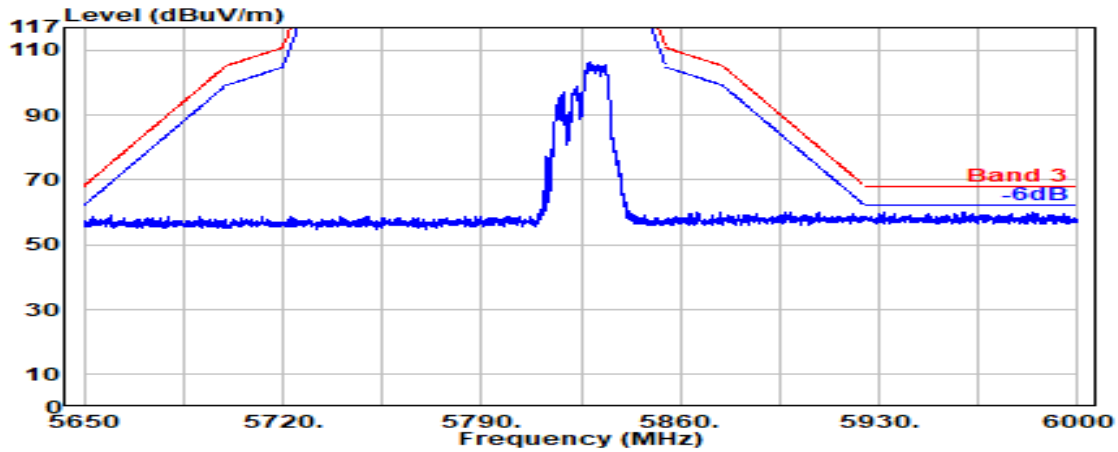

Antenna at Vertical Polarization

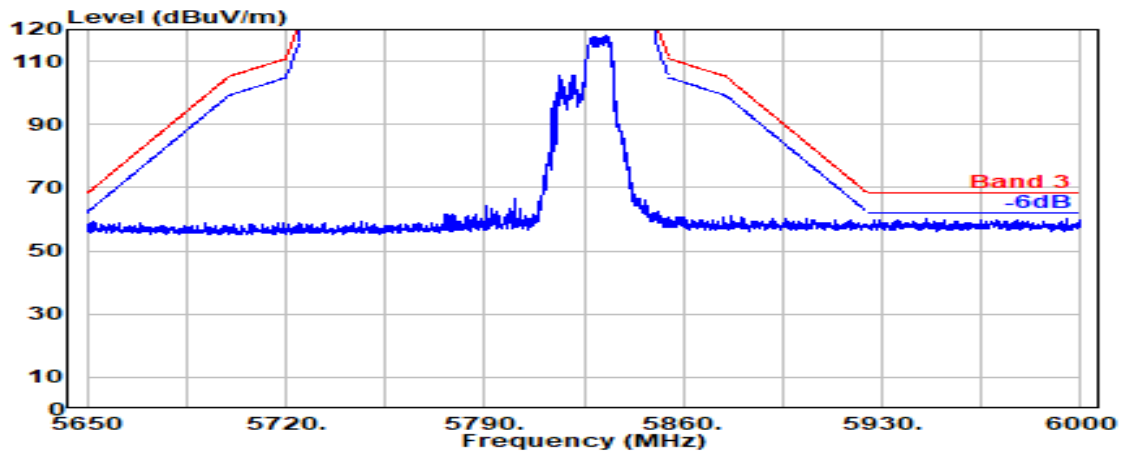


Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

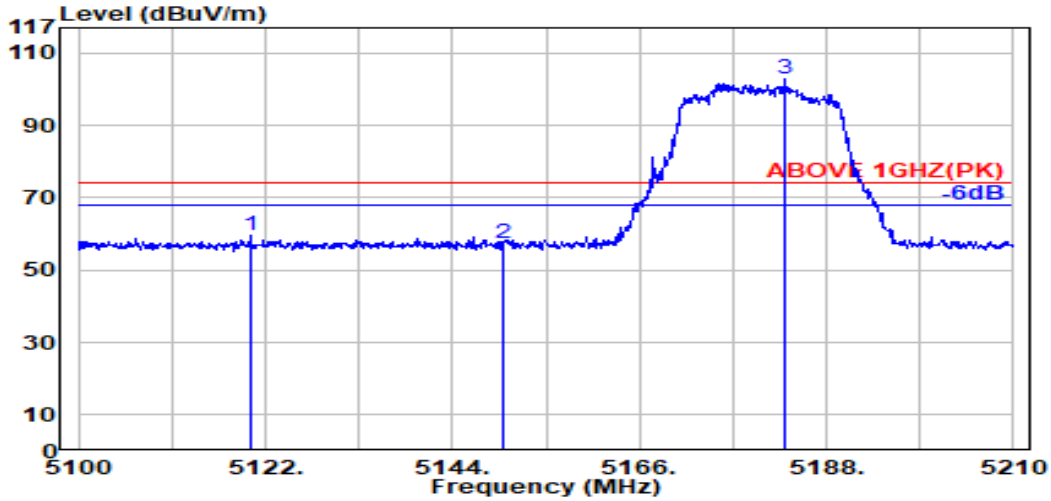

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.200	33.44	8.34	39.20	56.93	59.52	74.00	14.48	Peak
5150.000	33.50	8.37	39.19	54.79	57.47	74.00	16.53	Peak
@ 5183.100	33.70	8.41	39.19	99.75	102.67	---	---	Peak

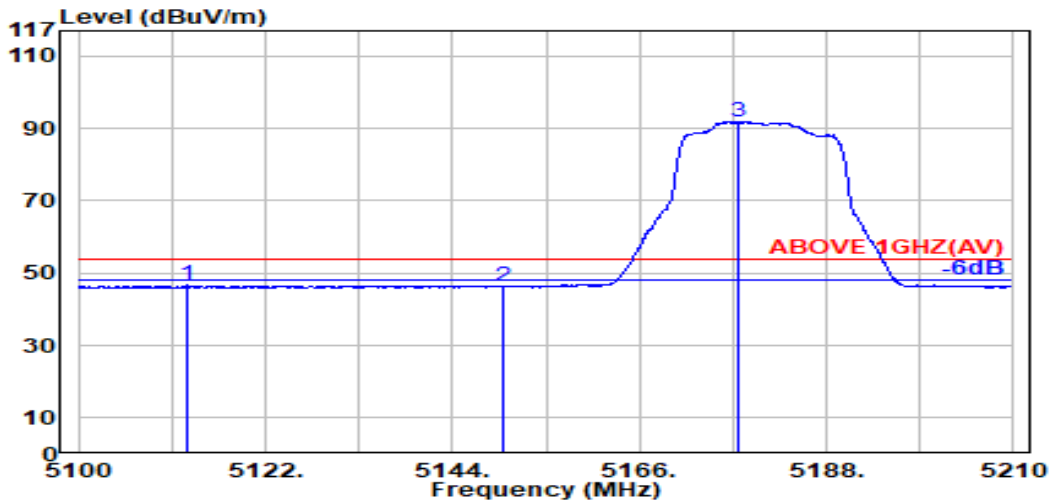


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.800	33.43	8.34	39.20	44.03	46.60	54.00	7.40	Average
5150.000	33.50	8.37	39.19	43.57	46.25	54.00	7.75	Average
@ 5177.500	33.67	8.40	39.19	88.93	91.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

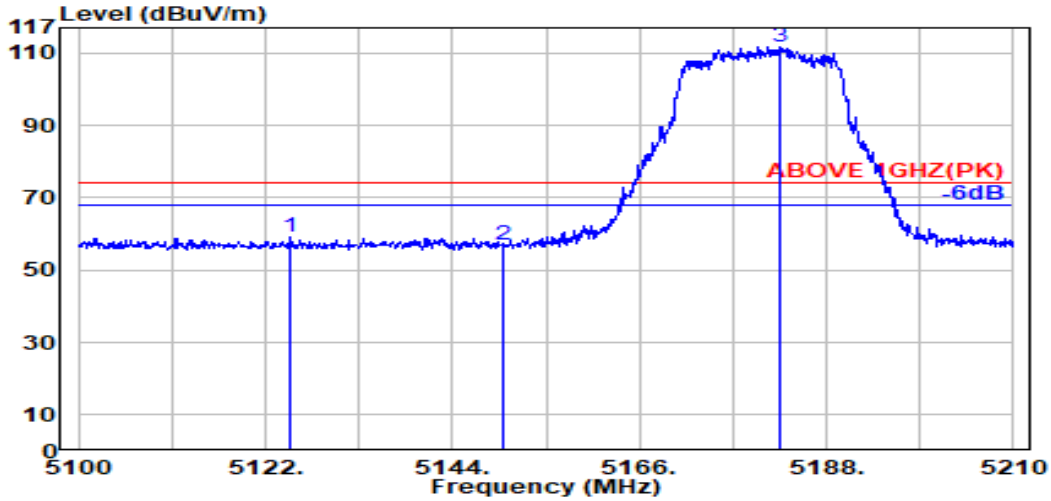

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.000	33.45	8.35	39.19	56.42	59.03	74.00	14.97	Peak
5150.000	33.50	8.37	39.19	54.16	56.85	74.00	17.15	Peak
@ 5182.400	33.69	8.41	39.19	108.92	111.83	---	---	Peak

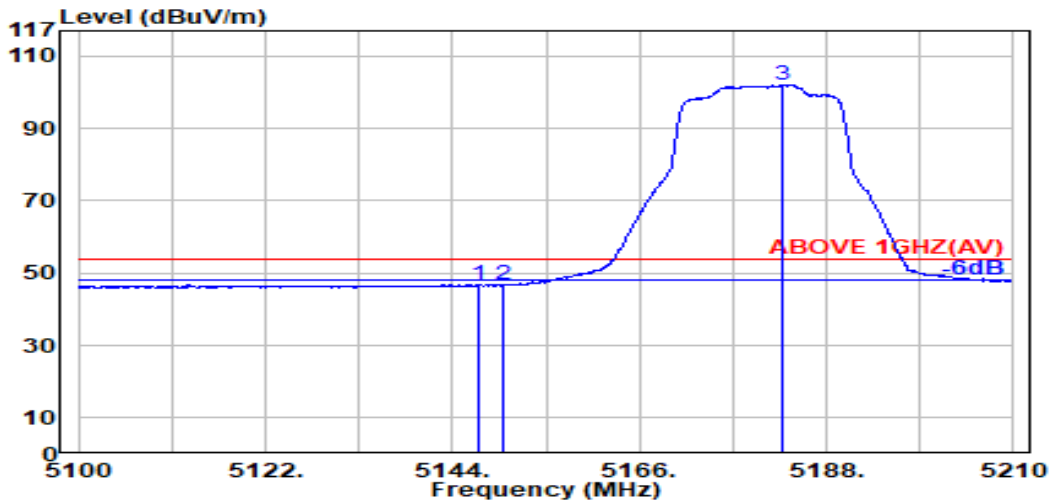


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.49	8.37	39.19	44.33	47.00	54.00	7.00	Average
5150.000	33.50	8.37	39.19	44.10	46.78	54.00	7.22	Average
@ 5182.700	33.70	8.41	39.19	99.15	102.06	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

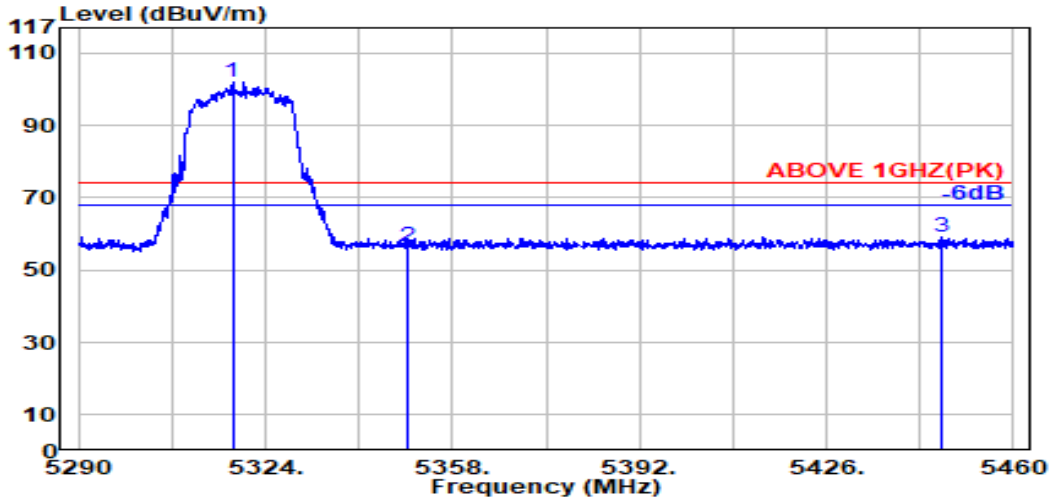

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.000	33.76	8.54	39.17	98.84	101.97	---	---	Peak
5350.000	33.70	8.57	39.17	53.61	56.72	74.00	17.28	Peak
5446.800	33.99	8.67	39.16	55.82	59.33	74.00	14.67	Peak

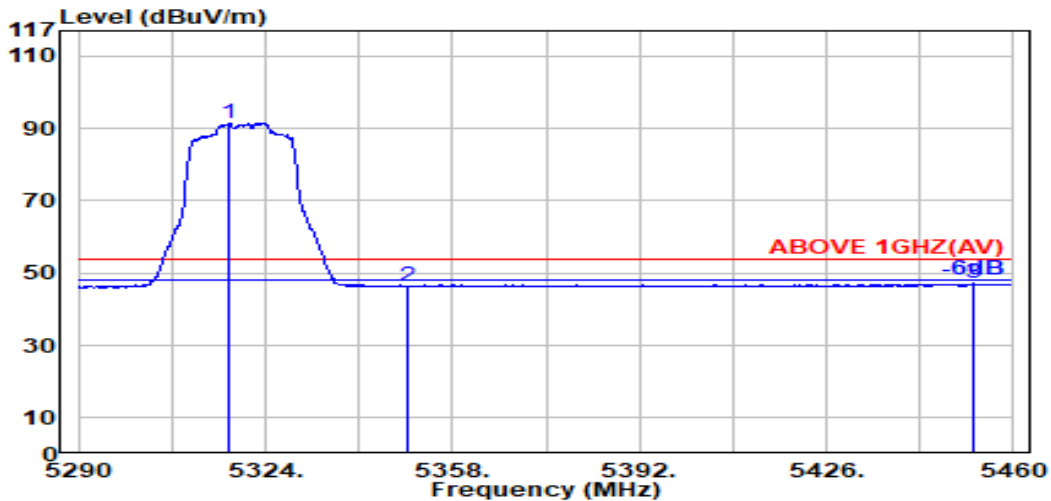


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.500	33.76	8.54	39.17	88.24	91.37	---	---	Average
5350.000	33.70	8.57	39.17	43.17	46.27	54.00	7.73	Average
5452.700	34.01	8.67	39.16	43.52	47.04	54.00	6.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

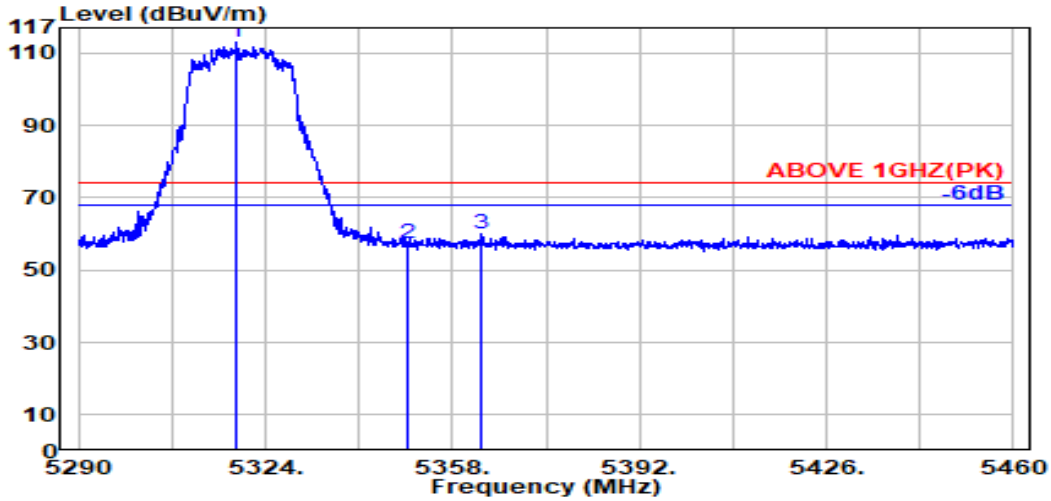

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.700	33.76	8.54	39.17	109.82	112.95	---	---	Peak
5350.000	33.70	8.57	39.17	54.50	57.60	74.00	16.40	Peak
5363.400	33.75	8.59	39.17	57.02	60.20	74.00	13.80	Peak

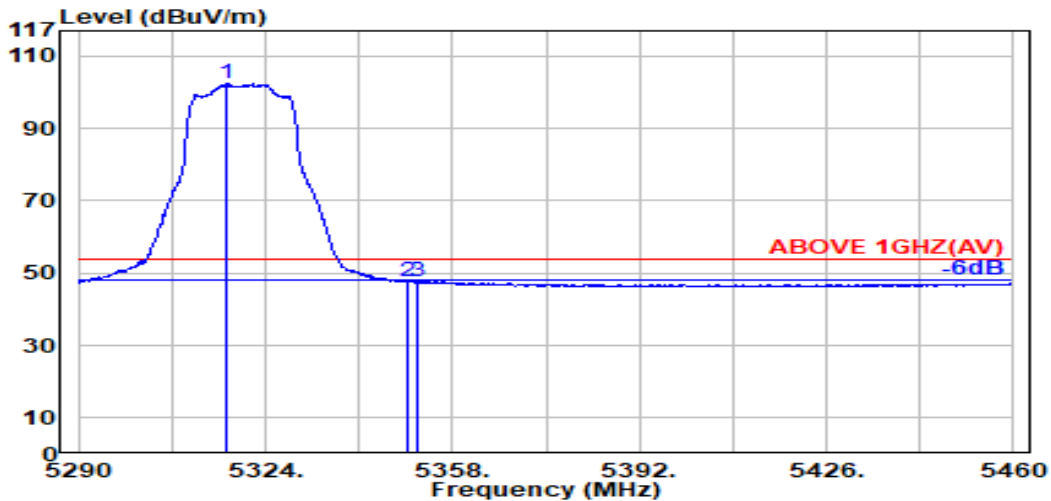


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.100	33.77	8.54	39.17	99.29	102.42	---	---	Average
5350.000	33.70	8.57	39.17	44.51	47.61	54.00	6.39	Average
5351.800	33.71	8.57	39.17	44.59	47.70	54.00	6.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

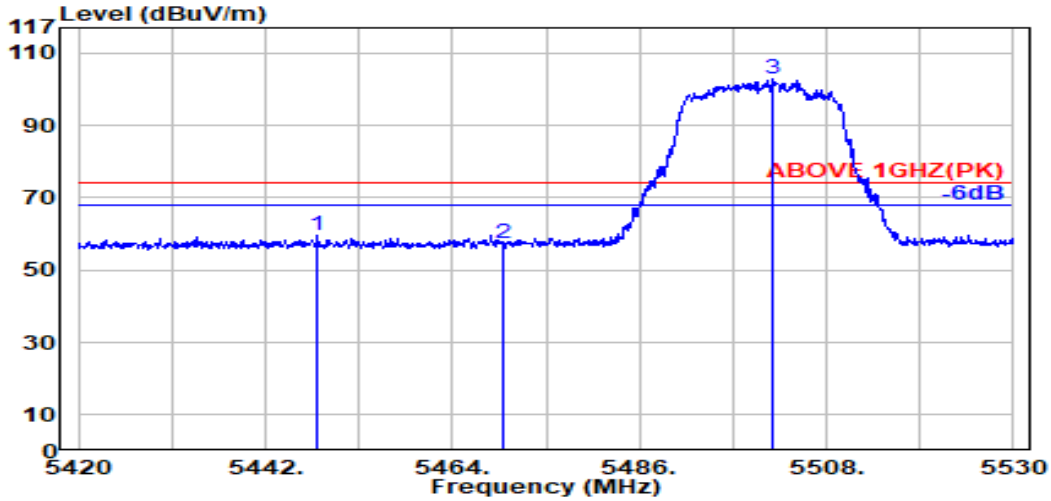

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.200	34.00	8.67	39.16	56.13	59.64	74.00	14.36	Peak
5470.000	34.04	8.69	39.15	53.71	57.29	74.00	16.71	Peak
@ 5501.700	34.10	8.72	39.15	99.20	102.87	---	---	Peak

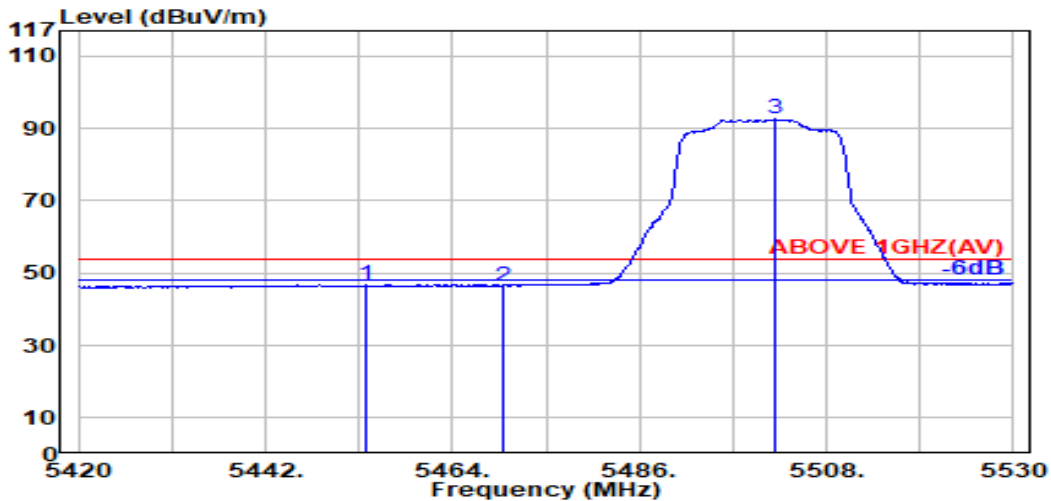


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.800	34.01	8.67	39.16	43.26	46.79	54.00	7.21	Average
5470.000	34.04	8.69	39.15	42.98	46.55	54.00	7.45	Average
@ 5502.000	34.10	8.72	39.15	88.87	92.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

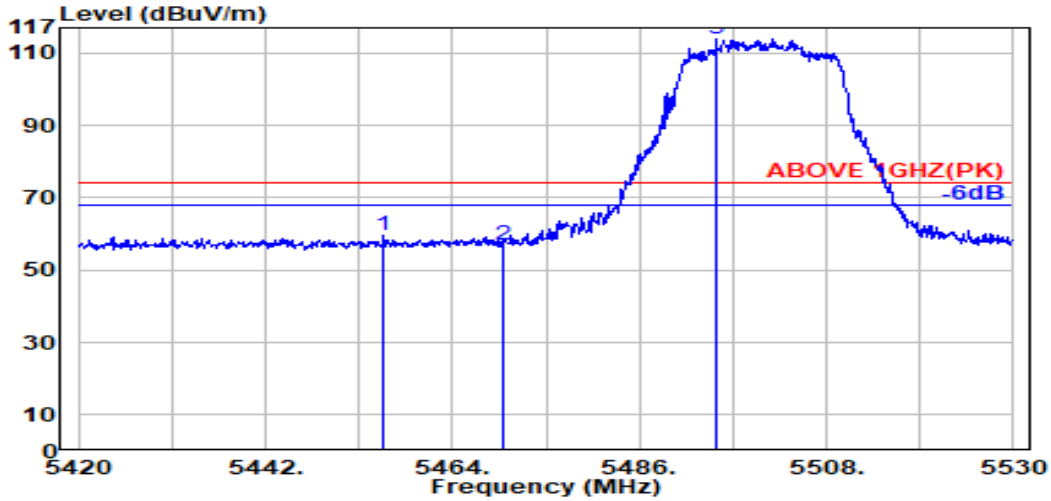

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.800	34.01	8.67	39.16	55.92	59.45	74.00	14.55	Peak
5470.000	34.04	8.69	39.15	53.44	57.02	74.00	16.98	Peak
@ 5495.000	34.09	8.71	39.15	110.45	114.10	---	---	Peak

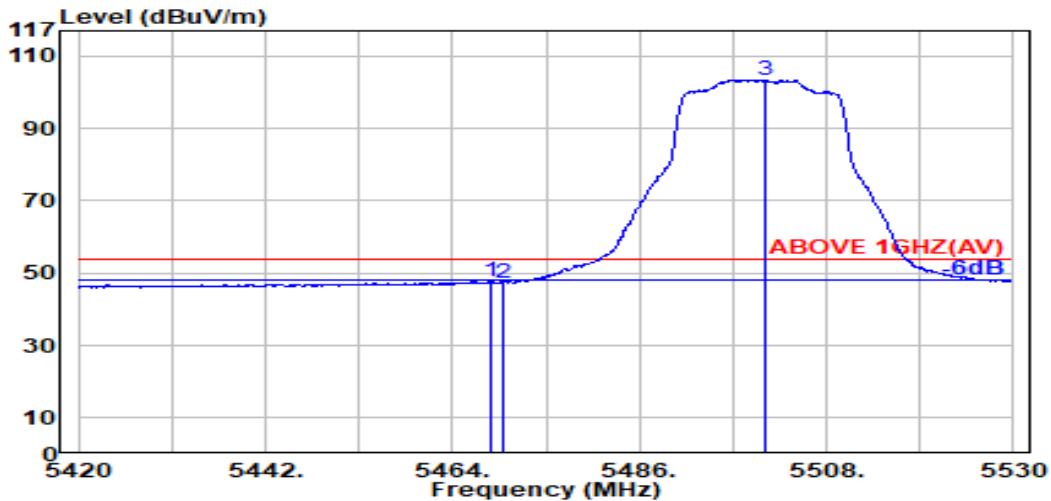


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	44.10	47.67	54.00	6.33	Average
5470.000	34.04	8.69	39.15	43.77	47.34	54.00	6.66	Average
@ 5500.900	34.10	8.72	39.15	99.76	103.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

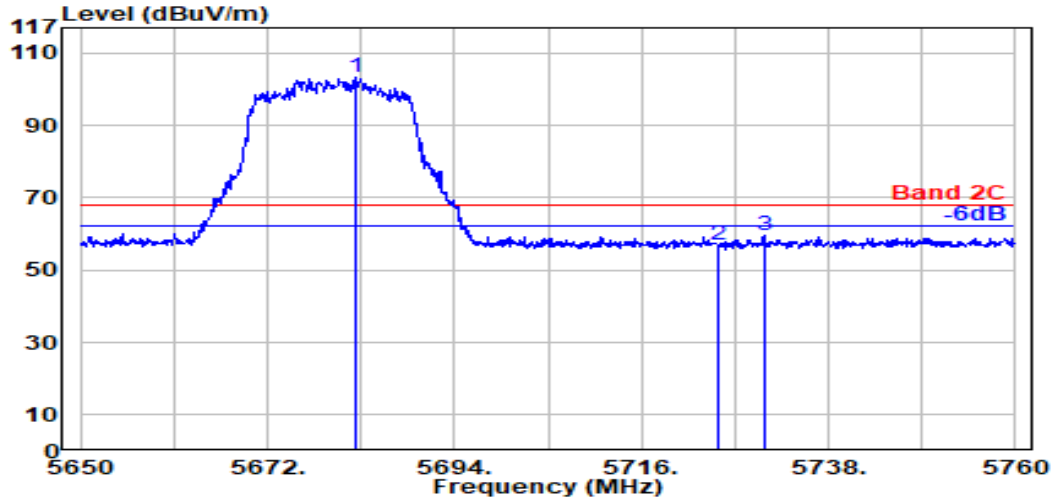

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.500	33.67	8.89	39.19	100.02	103.39	---	---	Peak
5725.000	33.60	8.93	39.20	53.63	56.95	68.20	11.25	Peak
5730.400	33.60	8.93	39.20	56.37	59.70	68.20	8.50	Peak

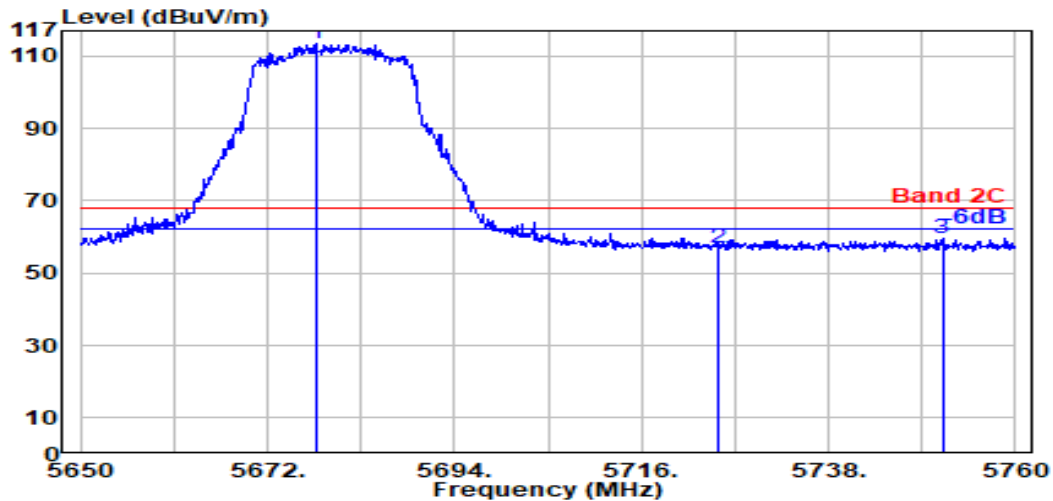


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.700	33.69	8.88	39.19	110.07	113.45	---	---	Peak
5725.000	33.60	8.93	39.20	53.80	57.13	68.20	11.07	Peak
5751.400	33.61	8.95	39.20	56.40	59.76	68.20	8.44	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

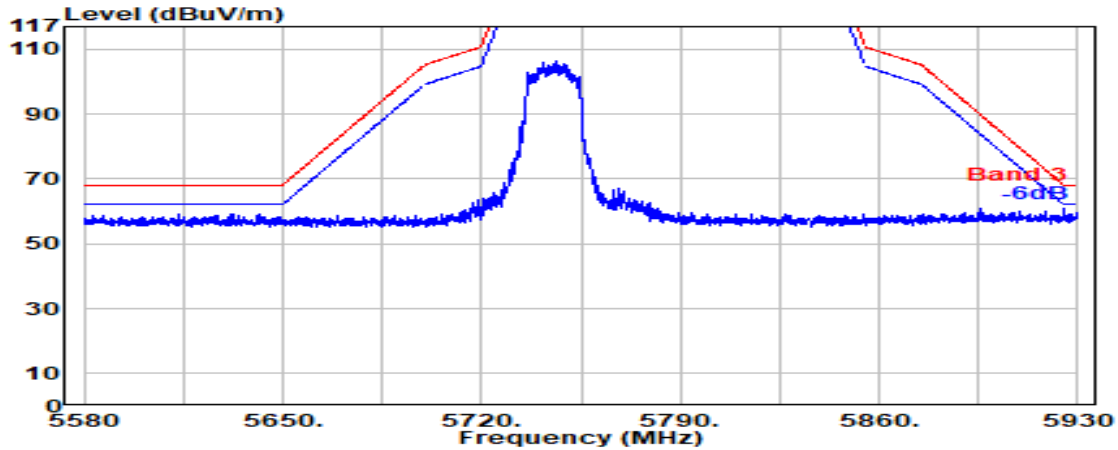


Antenna at Vertical Polarization

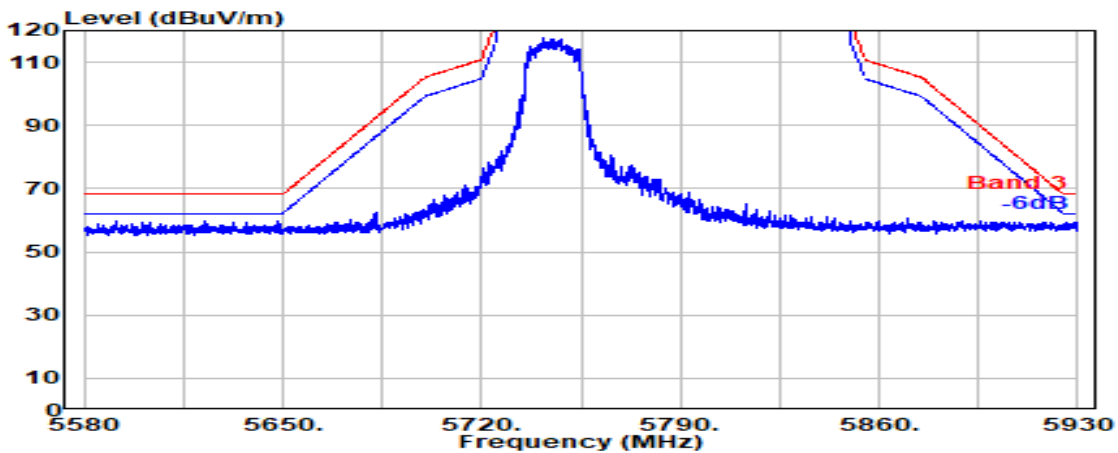


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

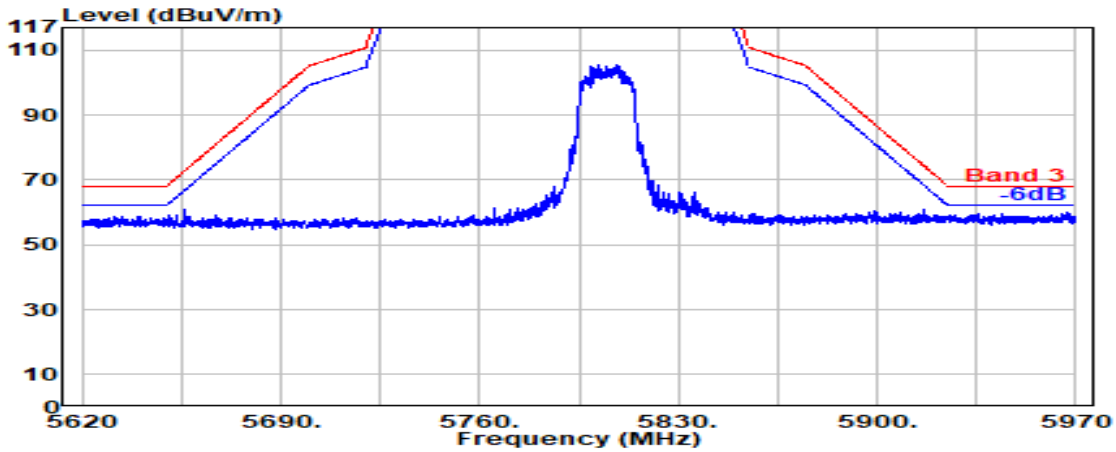

Antenna at Vertical Polarization

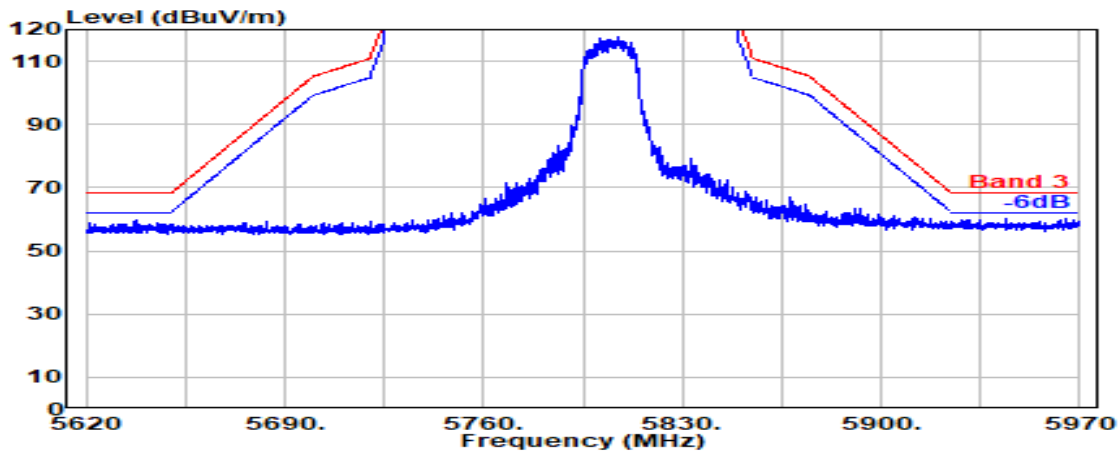


Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

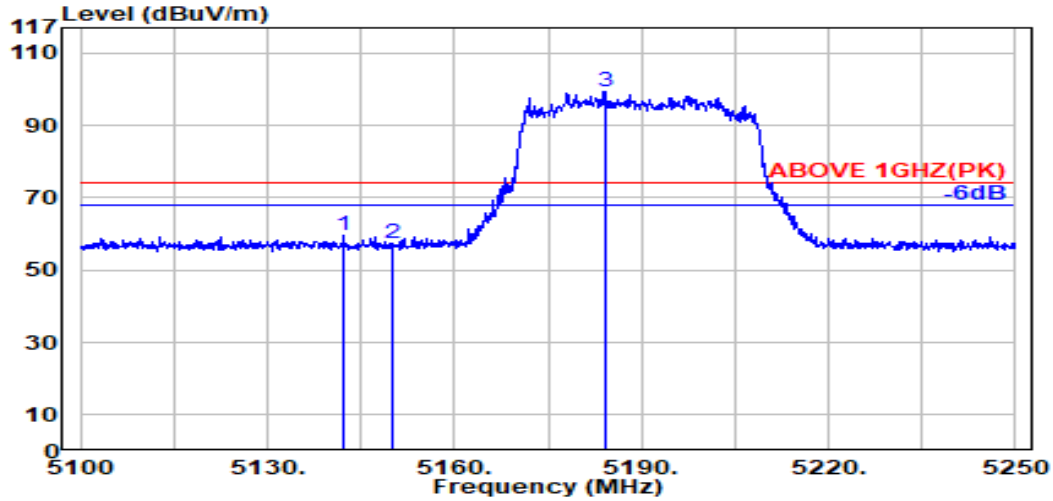

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.100	33.48	8.37	39.19	56.75	59.41	74.00	14.59	Peak
5150.000	33.50	8.37	39.19	54.75	57.43	74.00	16.57	Peak
@ 5184.100	33.70	8.41	39.19	96.51	99.43	---	---	Peak

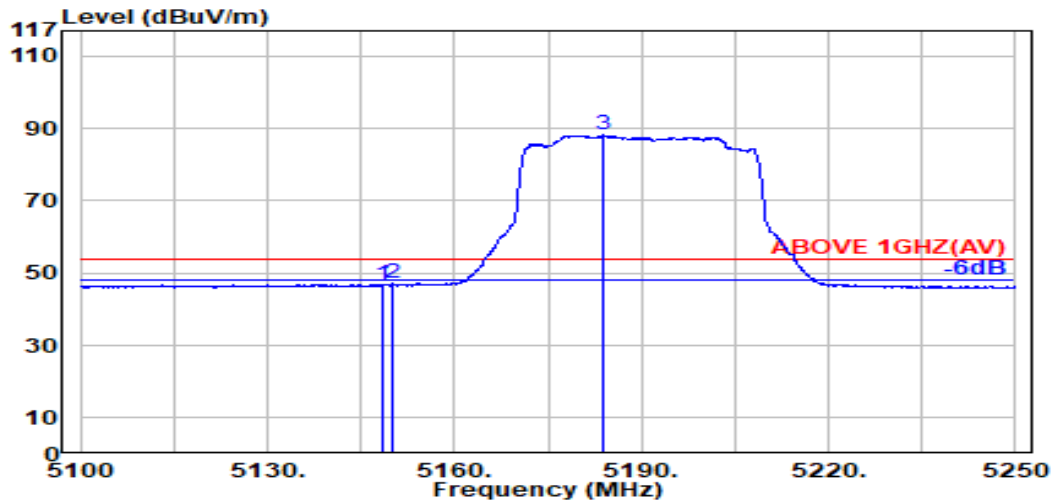


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.50	8.37	39.19	44.21	46.89	54.00	7.11	Average
5150.000	33.50	8.37	39.19	44.36	47.05	54.00	6.95	Average
@ 5184.000	33.70	8.41	39.19	85.25	88.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

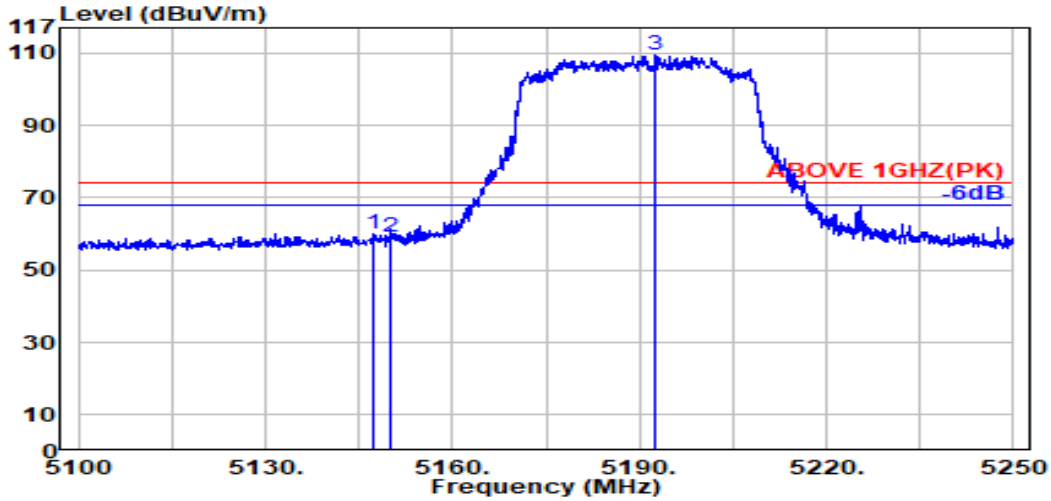

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.49	8.37	39.19	57.51	60.18	74.00	13.82	Peak
5150.000	33.50	8.37	39.19	56.50	59.19	74.00	14.81	Peak
@ 5192.400	33.75	8.42	39.19	106.29	109.28	---	---	Peak

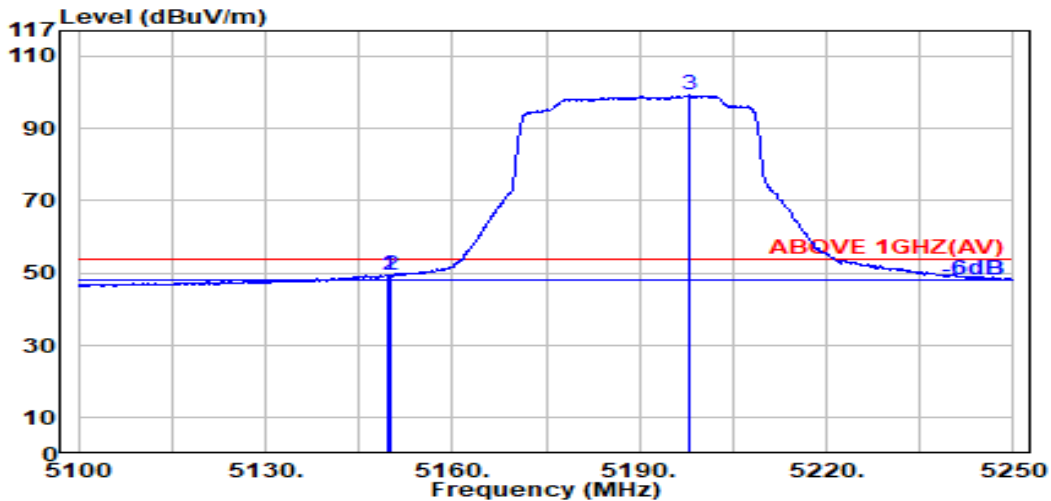


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	46.96	49.64	54.00	4.36	Average
5150.000	33.50	8.37	39.19	46.58	49.26	54.00	4.74	Average
@ 5198.100	33.79	8.42	39.19	96.17	99.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

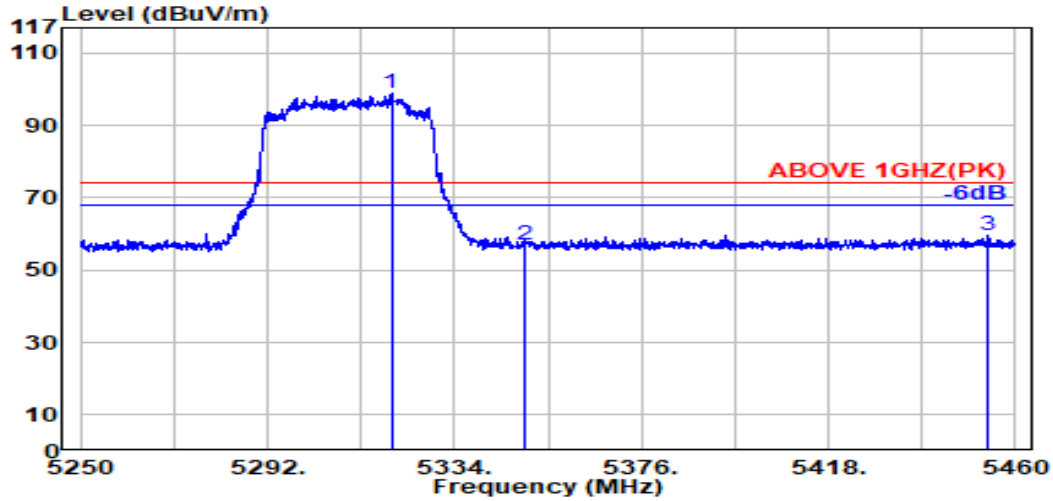

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5319.800	33.76	8.54	39.17	95.64	98.77	---	---	Peak
	5350.000	33.70	8.57	39.17	53.88	56.99	74.00	17.01	Peak
	5453.600	34.01	8.67	39.16	56.24	59.77	74.00	14.23	Peak

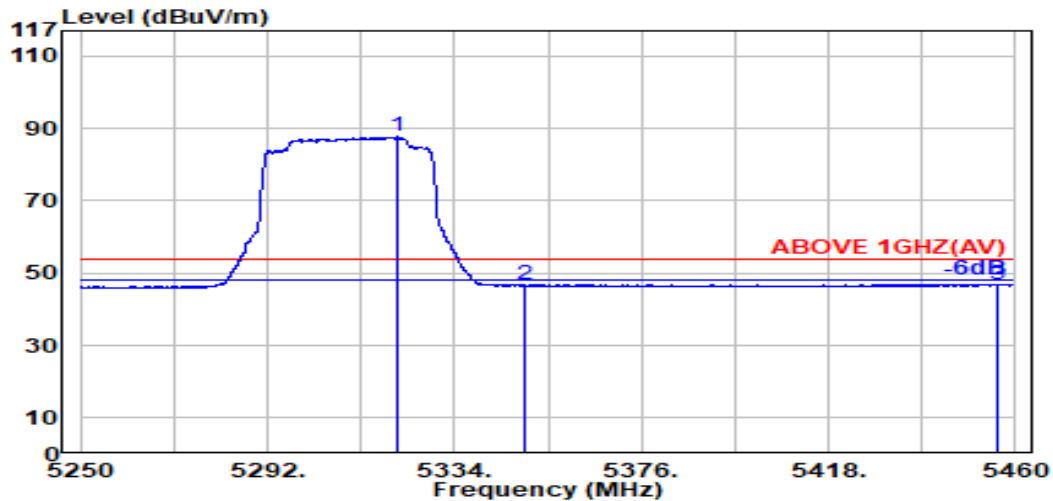

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5321.100	33.76	8.54	39.17	84.58	87.71	---	---	Average
	5350.000	33.70	8.57	39.17	43.60	46.71	54.00	7.29	Average
	5456.000	34.01	8.67	39.16	43.47	47.00	54.00	7.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

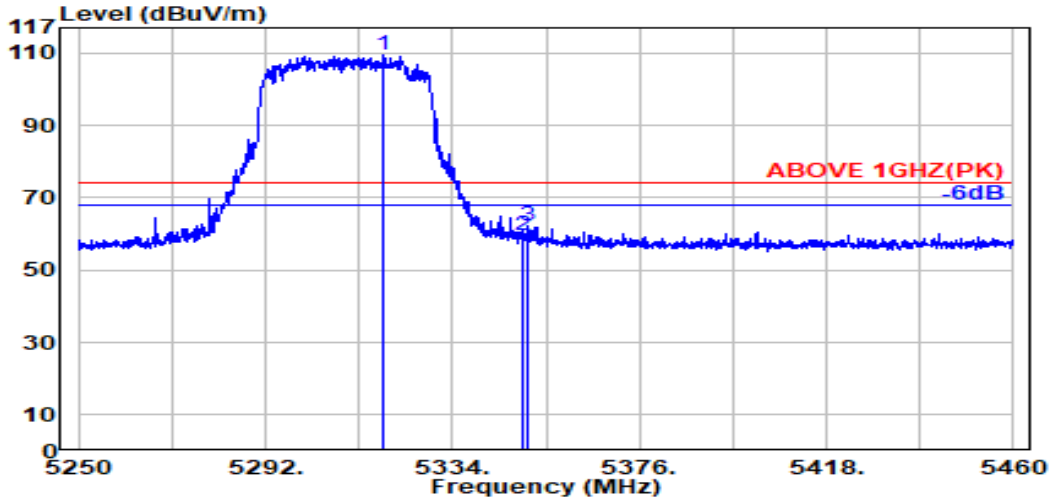

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.300	33.76	8.54	39.17	106.23	109.37	---	---	Peak
5350.000	33.70	8.57	39.17	56.66	59.77	74.00	14.23	Peak
5350.800	33.70	8.57	39.17	59.09	62.20	74.00	11.80	Peak

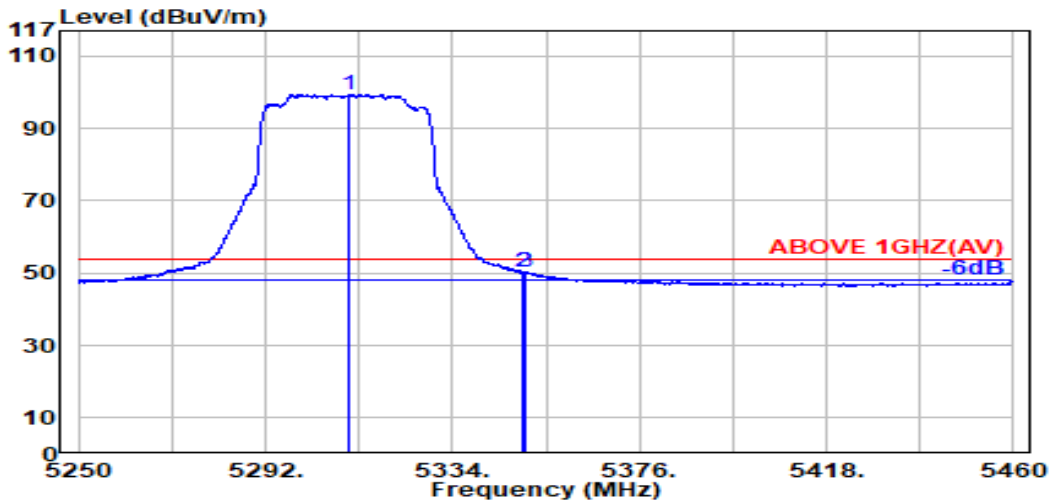


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.600	33.78	8.53	39.17	96.38	99.52	---	---	Average
5350.000	33.70	8.57	39.17	47.10	50.21	54.00	3.79	Average
5350.400	33.70	8.57	39.17	47.10	50.21	54.00	3.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

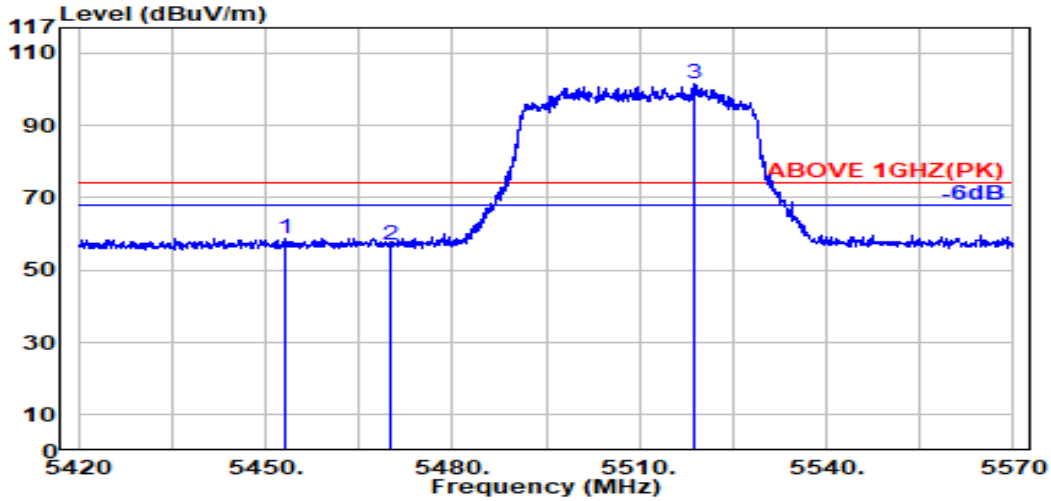

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.300	34.01	8.67	39.16	55.36	58.88	74.00	15.12	Peak
5470.000	34.04	8.69	39.15	53.57	57.14	74.00	16.86	Peak
@ 5518.600	34.06	8.73	39.15	98.03	101.67	---	---	Peak

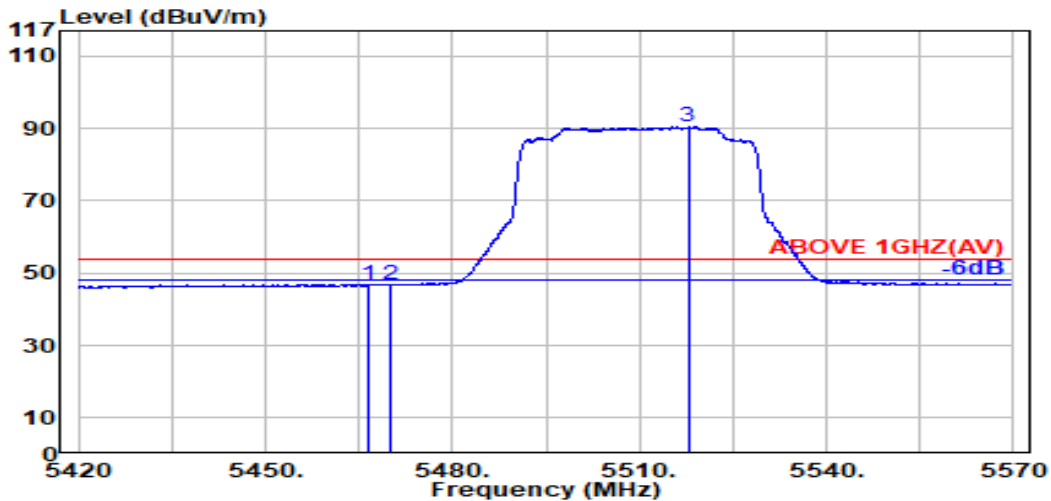


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.68	39.15	43.40	46.97	54.00	7.03	Average
5470.000	34.04	8.69	39.15	43.37	46.95	54.00	7.05	Average
@ 5517.800	34.06	8.73	39.15	86.81	90.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

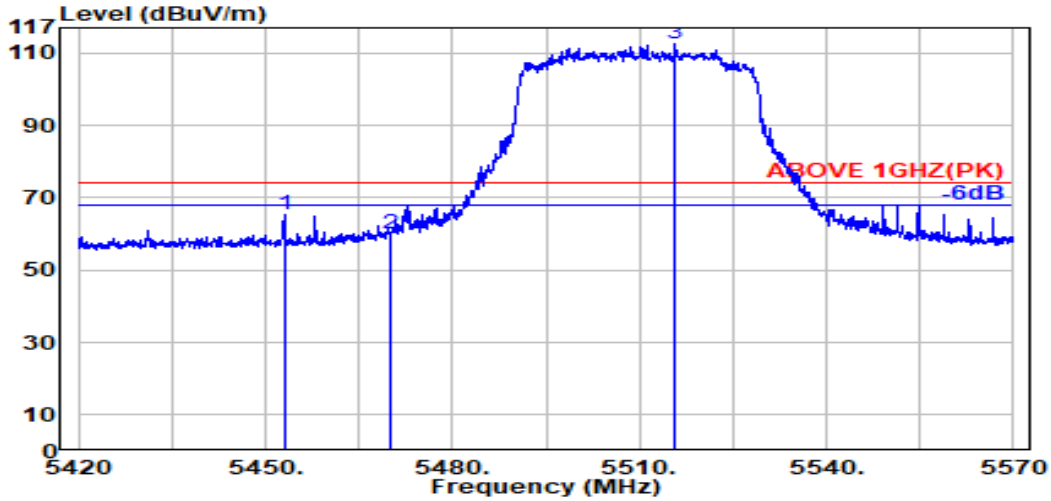

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.000	34.01	8.67	39.16	61.92	65.45	74.00	8.55	Peak
5470.000	34.04	8.69	39.15	56.25	59.83	74.00	14.17	Peak
@ 5515.800	34.07	8.73	39.15	108.83	112.47	---	---	Peak

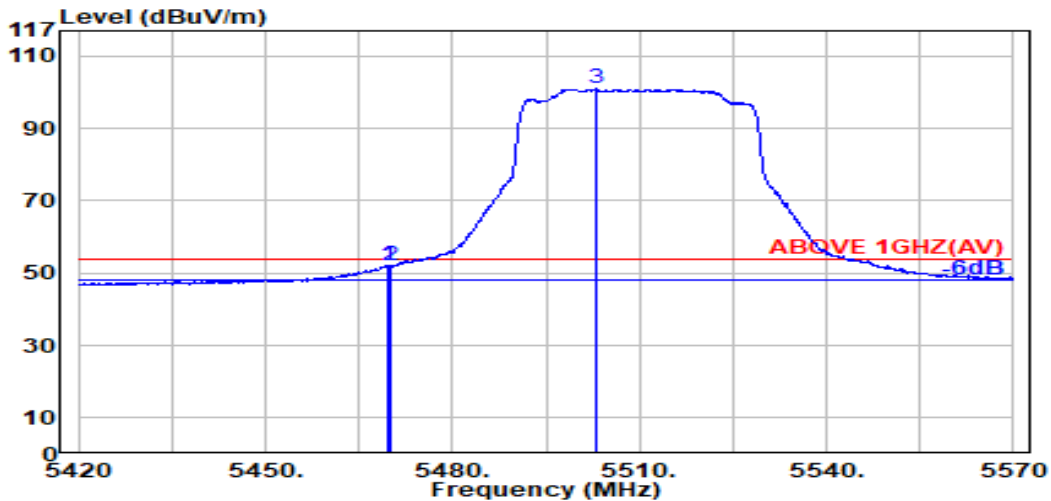

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.04	8.69	39.15	48.58	52.16	54.00	1.84	Average
5470.000	34.04	8.69	39.15	48.33	51.90	54.00	2.10	Average
@ 5503.100	34.09	8.72	39.15	97.24	100.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

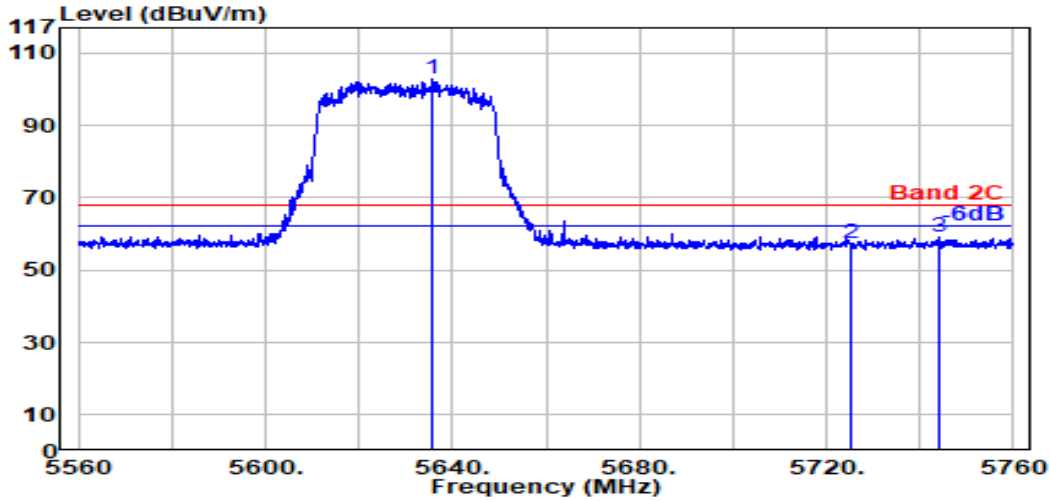

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5635.800	33.80	8.84	39.18	99.62	103.08	---	---	Peak
5725.000	33.60	8.93	39.20	54.19	57.52	68.20	10.68	Peak
5744.300	33.60	8.94	39.20	55.72	59.06	68.20	9.14	Peak

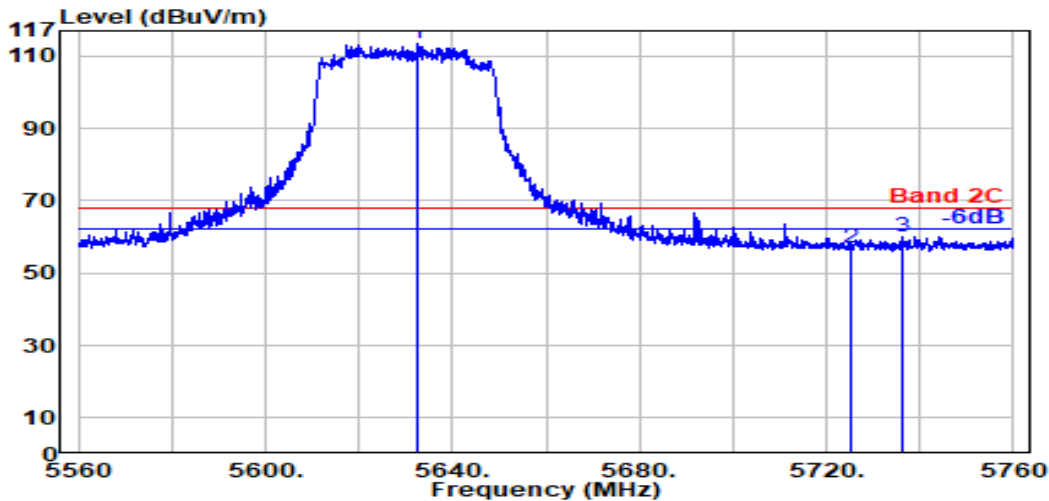


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5632.500	33.80	8.84	39.18	109.89	113.35	---	---	Peak
5725.000	33.60	8.93	39.20	53.81	57.14	68.20	11.06	Peak
5736.200	33.60	8.94	39.20	56.86	60.19	68.20	8.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

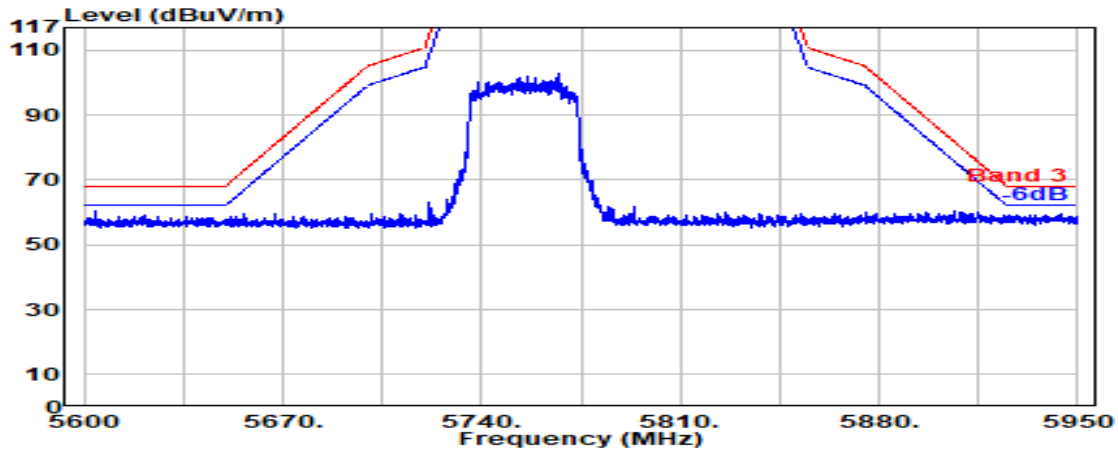


Antenna at Vertical Polarization

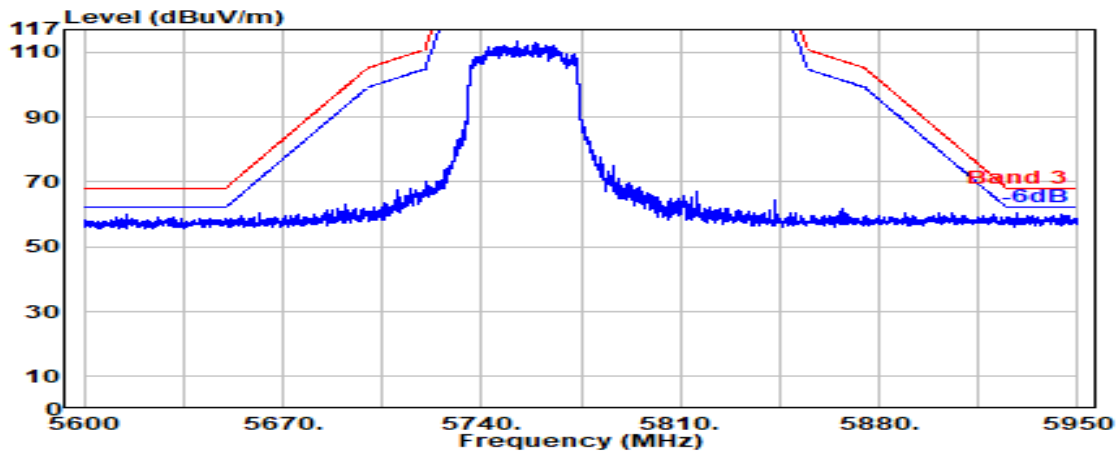


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

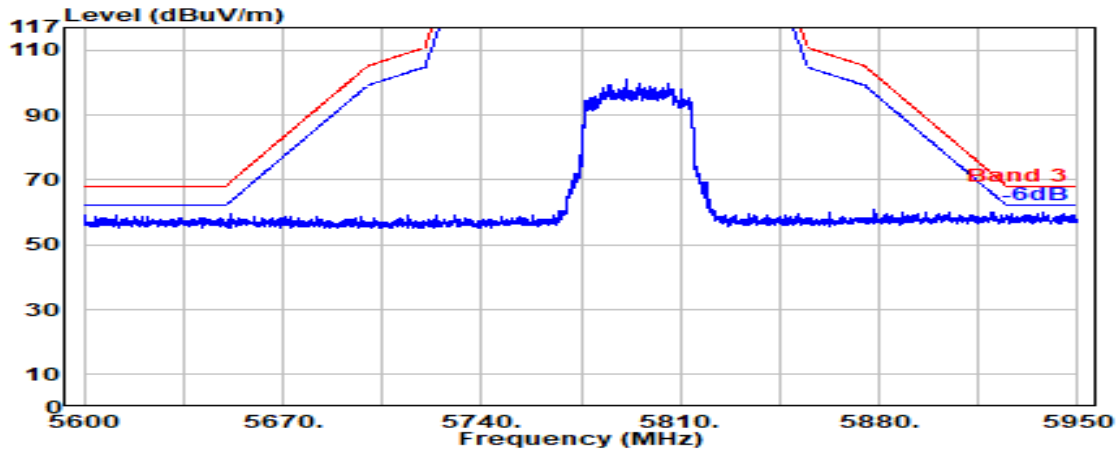

Antenna at Vertical Polarization

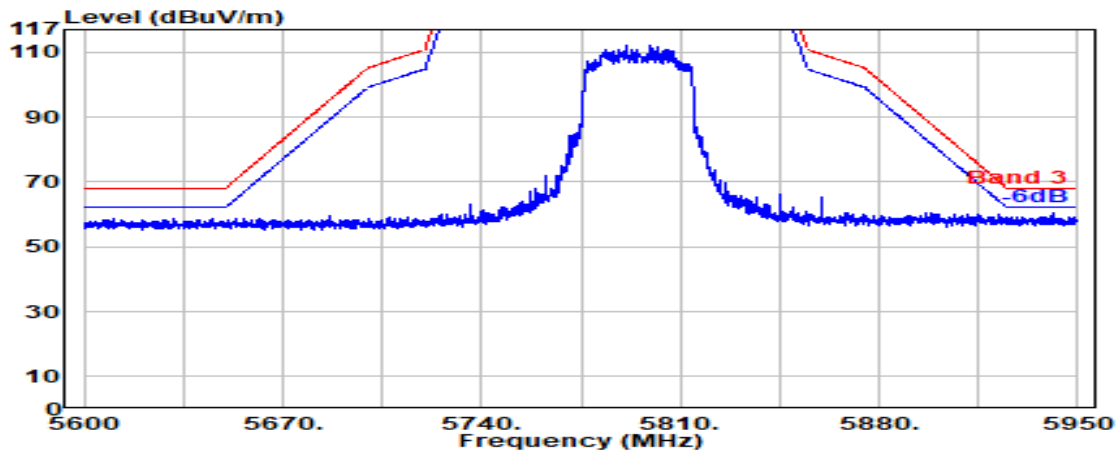


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

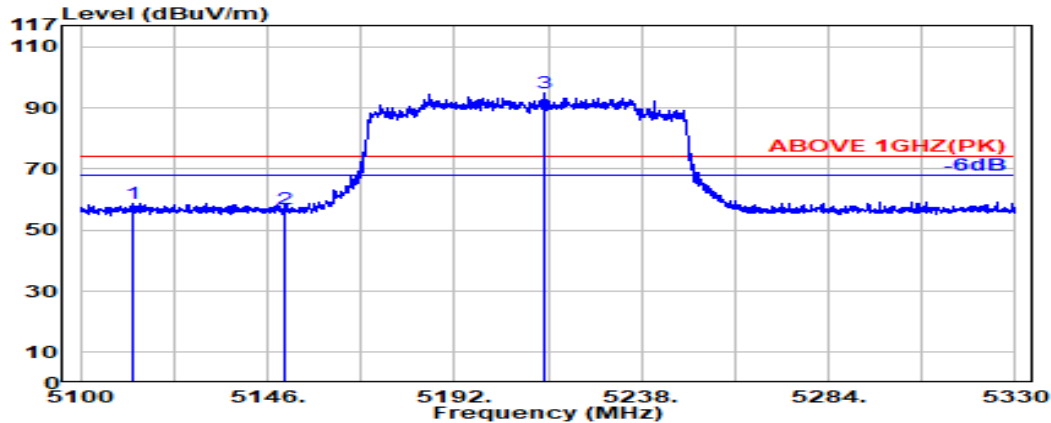

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.000	33.43	8.34	39.20	56.30	58.87	74.00	15.13	Peak
5150.000	33.50	8.37	39.19	54.44	57.13	74.00	16.87	Peak
@ 5214.100	33.77	8.44	39.18	92.00	95.03	---	---	Peak

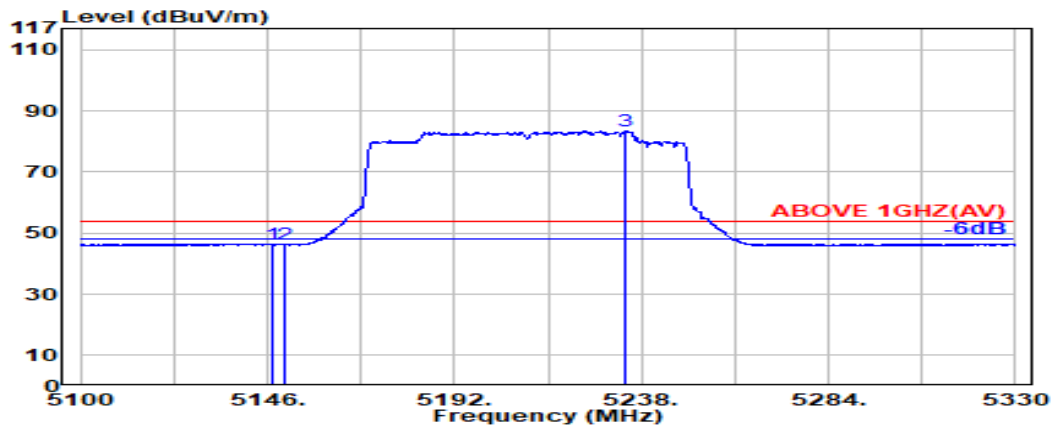


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.49	8.37	39.19	43.82	46.49	54.00	7.51	Average
5150.000	33.50	8.37	39.19	43.52	46.20	54.00	7.80	Average
@ 5234.200	33.73	8.46	39.18	80.43	83.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

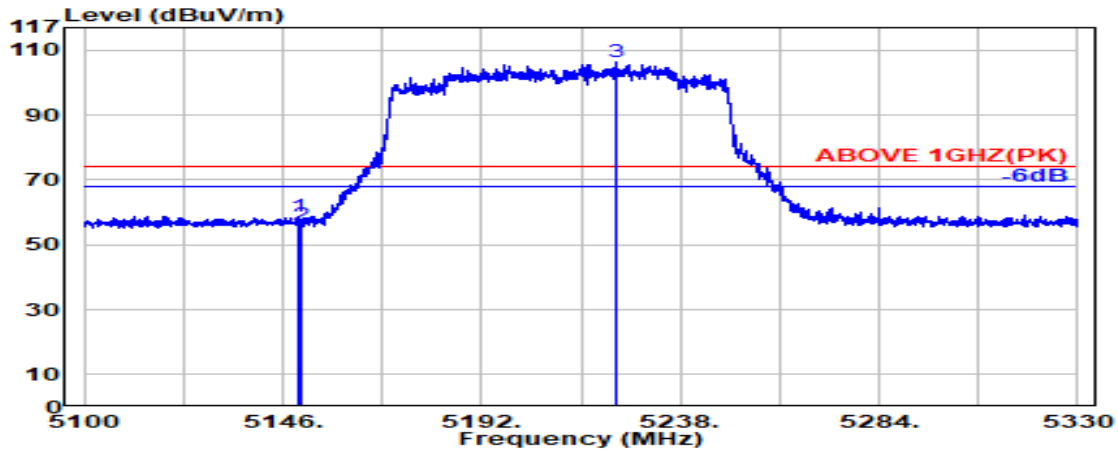

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	33.50	8.37	39.19	56.18	58.86	74.00	15.14	Peak
5150.000	33.50	8.37	39.19	53.46	56.15	74.00	17.85	Peak
@ 5223.300	33.75	8.45	39.18	103.20	106.22	---	---	Peak

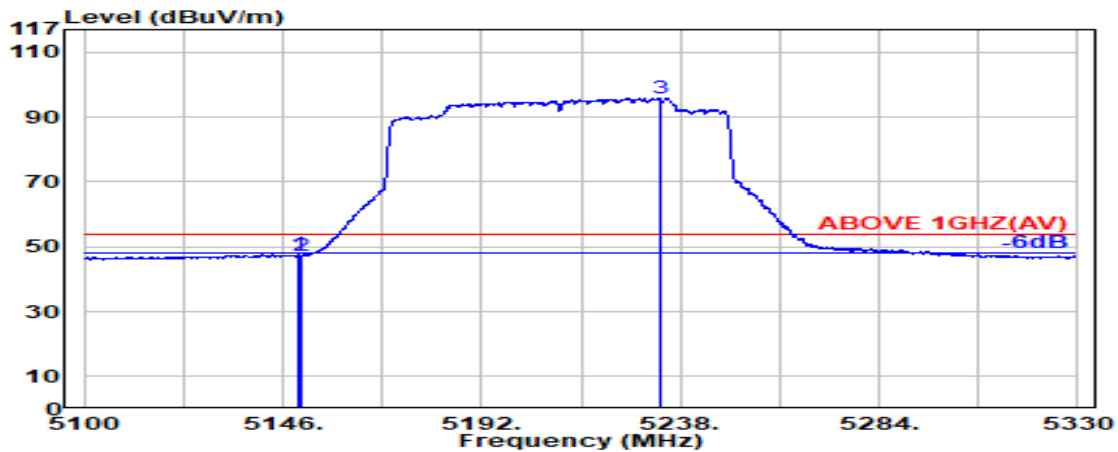


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	44.89	47.57	54.00	6.43	Average
5150.000	33.50	8.37	39.19	44.66	47.34	54.00	6.66	Average
@ 5233.200	33.73	8.46	39.18	92.73	95.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

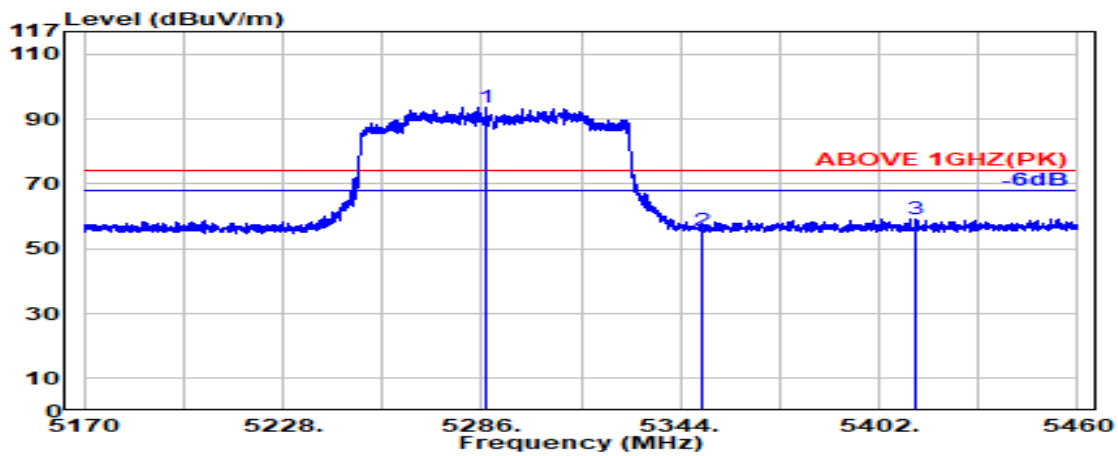

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.400	33.77	8.51	39.17	90.60	93.71	---	---	Peak
5350.000	33.70	8.57	39.17	52.51	55.61	74.00	18.39	Peak
5413.000	33.93	8.63	39.16	55.90	59.30	74.00	14.70	Peak

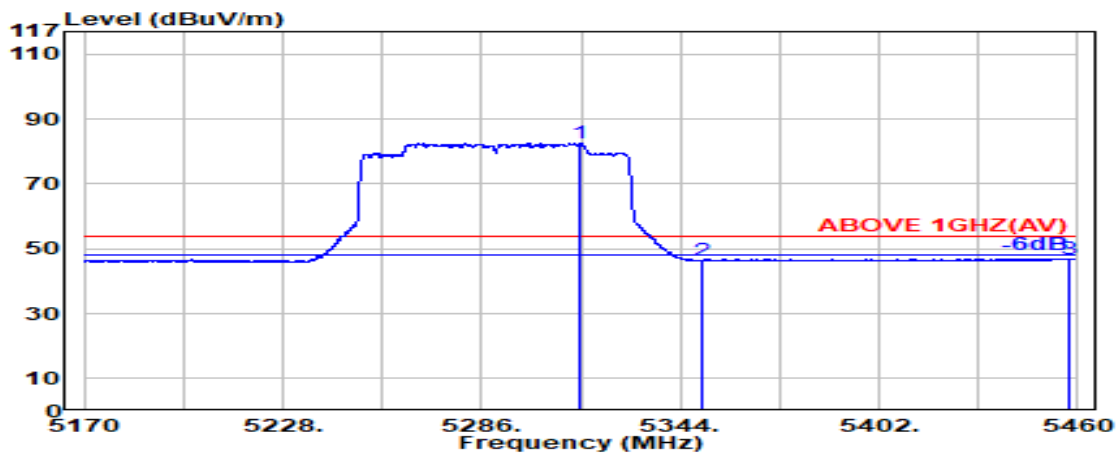


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.500	33.77	8.54	39.17	79.41	82.55	---	---	Average
5350.000	33.70	8.57	39.17	43.30	46.40	54.00	7.60	Average
5457.400	34.01	8.68	39.15	43.45	46.98	54.00	7.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

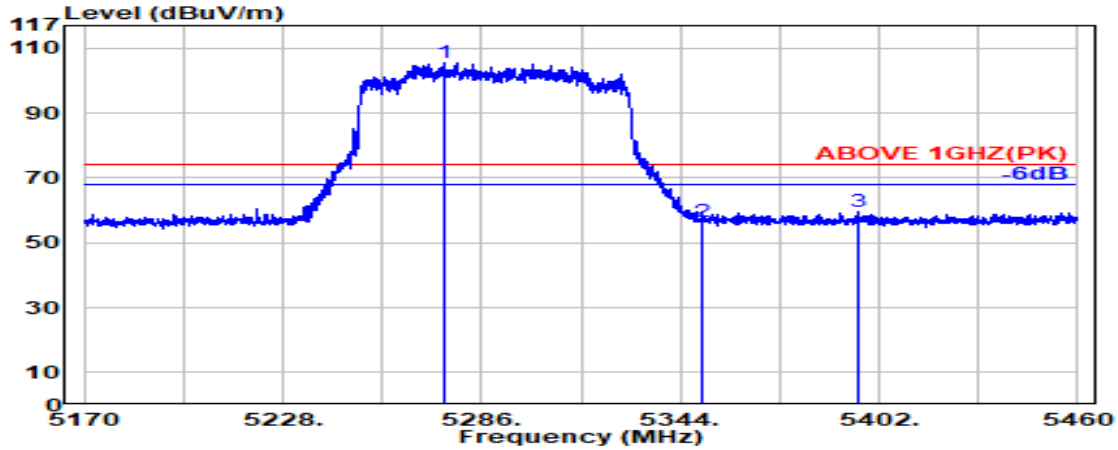

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.300	33.75	8.50	39.18	102.61	105.68	---	---	Peak
5350.000	33.70	8.57	39.17	53.23	56.33	74.00	17.67	Peak
5395.700	33.88	8.62	39.16	56.32	59.65	74.00	14.35	Peak

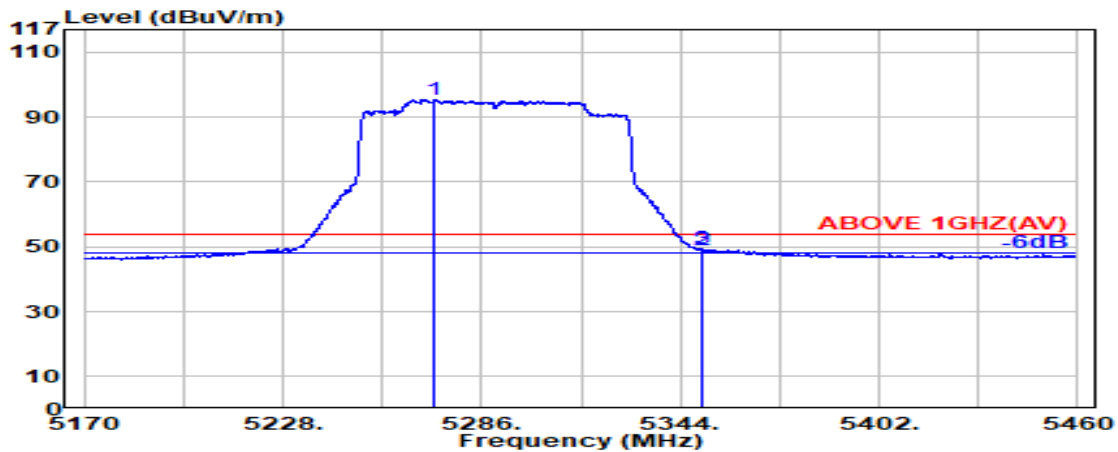


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.300	33.74	8.50	39.18	92.51	95.58	---	---	Average
5350.000	33.70	8.57	39.17	45.99	49.09	54.00	4.91	Average
5350.600	33.70	8.57	39.17	46.20	49.30	54.00	4.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

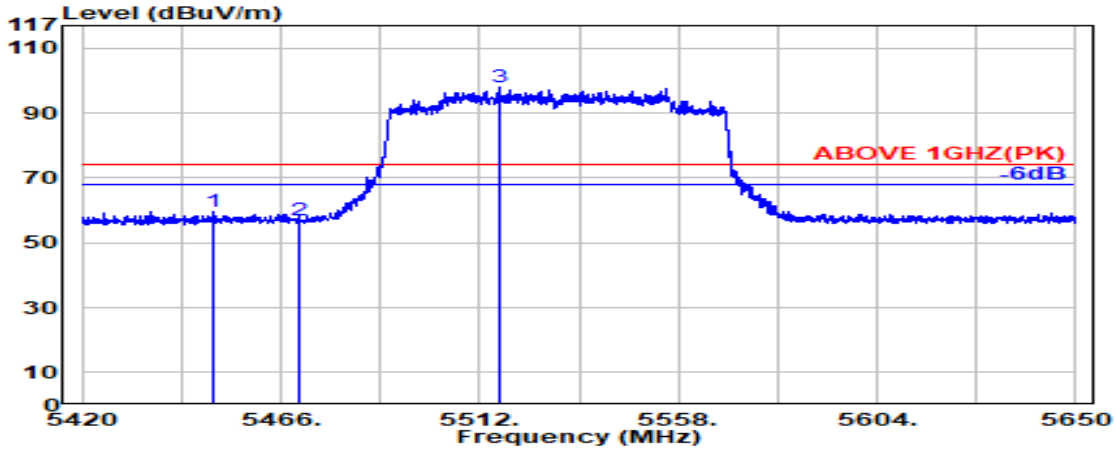

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.100	34.00	8.67	39.16	56.14	59.65	74.00	14.35	Peak
5470.000	34.04	8.69	39.15	53.36	56.93	74.00	17.07	Peak
@ 5516.500	34.07	8.73	39.15	94.36	98.01	---	---	Peak

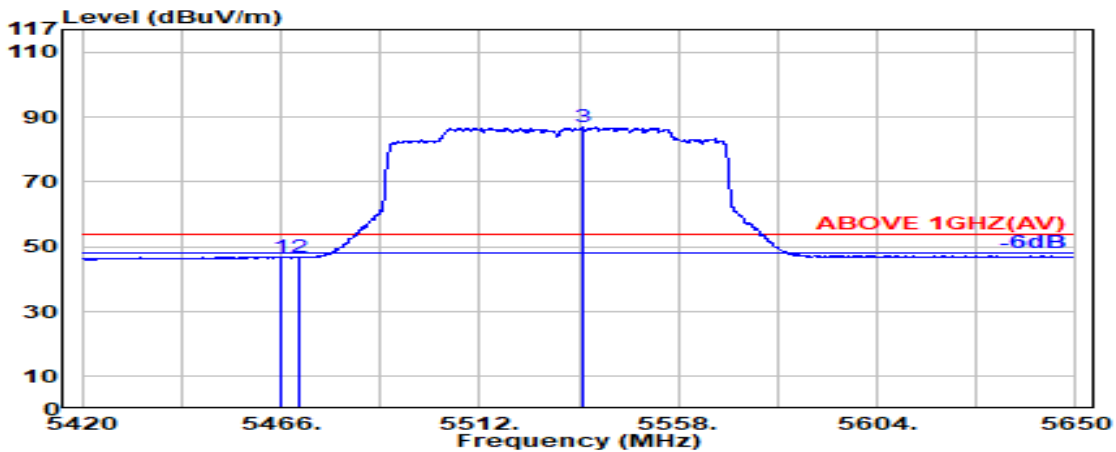


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.03	8.68	39.15	43.44	47.00	54.00	7.00	Average
5470.000	34.04	8.69	39.15	43.27	46.84	54.00	7.16	Average
@ 5536.000	34.03	8.75	39.16	83.23	86.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

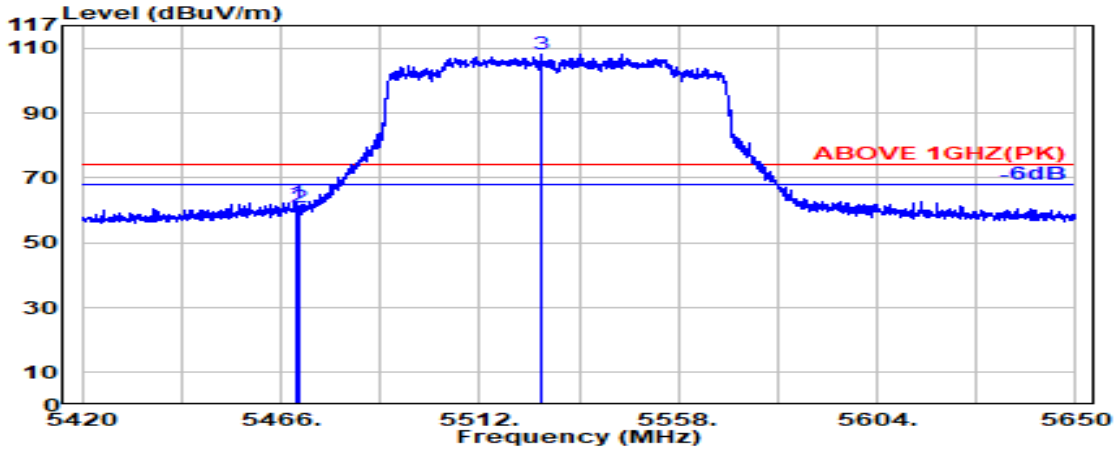

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.04	8.69	39.15	58.88	62.45	74.00	11.55	Peak
5470.000	34.04	8.69	39.15	57.43	61.00	74.00	13.00	Peak
@ 5526.400	34.05	8.74	39.16	104.54	108.18	---	---	Peak

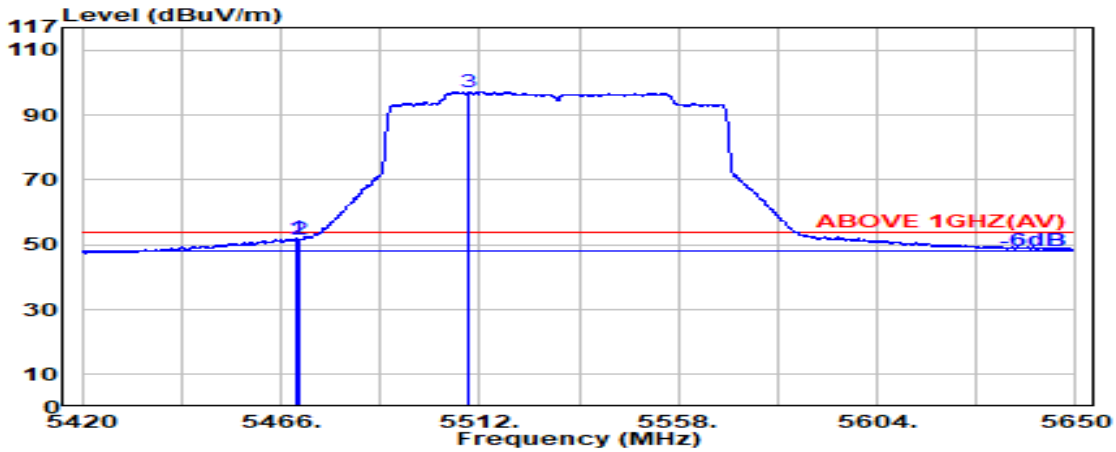


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.04	8.69	39.15	48.36	51.94	54.00	2.06	Average
5470.000	34.04	8.69	39.15	47.97	51.54	54.00	2.46	Average
@ 5509.600	34.08	8.73	39.15	93.58	97.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

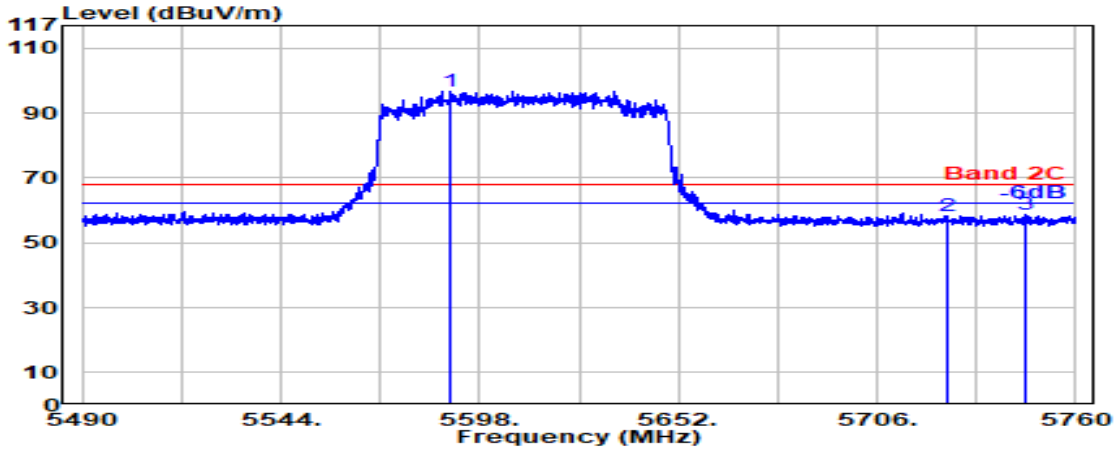

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5590.300	33.84	8.80	39.17	93.27	96.75	---	---	Peak
5725.000	33.60	8.93	39.20	54.95	58.28	68.20	9.92	Peak
5746.500	33.60	8.95	39.20	55.17	58.51	68.20	9.69	Peak

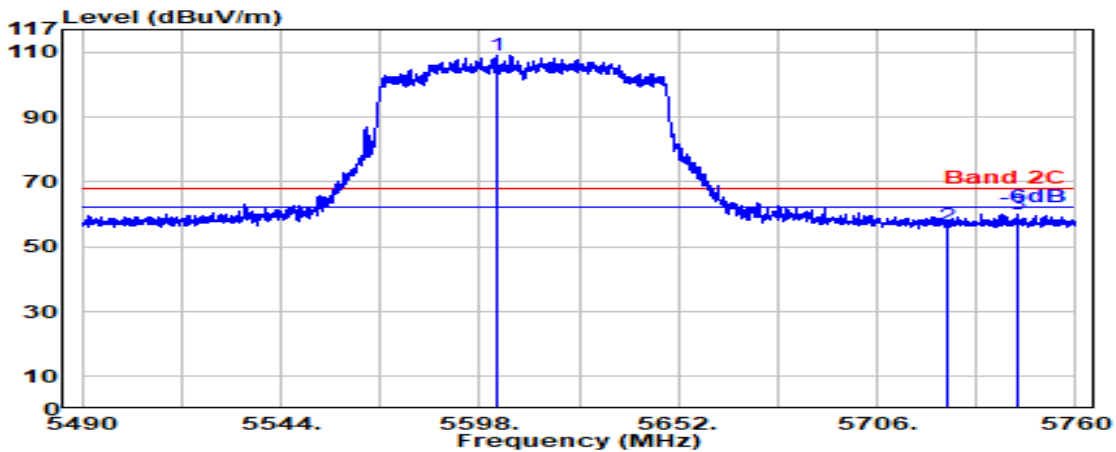


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5602.400	33.80	8.81	39.17	105.48	108.92	---	---	Peak
5725.000	33.60	8.93	39.20	53.33	56.66	68.20	11.54	Peak
5744.100	33.60	8.94	39.20	56.76	60.11	68.20	8.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

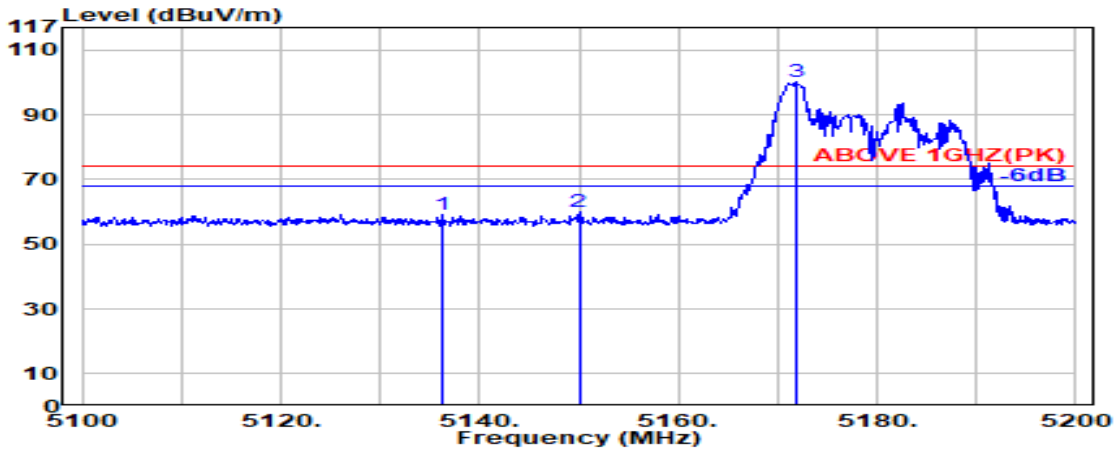

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.300	33.47	8.36	39.19	56.45	59.09	74.00	14.91	Peak
5150.000	33.50	8.37	39.19	57.15	59.84	74.00	14.16	Peak
@ 5171.900	33.63	8.40	39.19	97.49	100.33	---	---	Peak

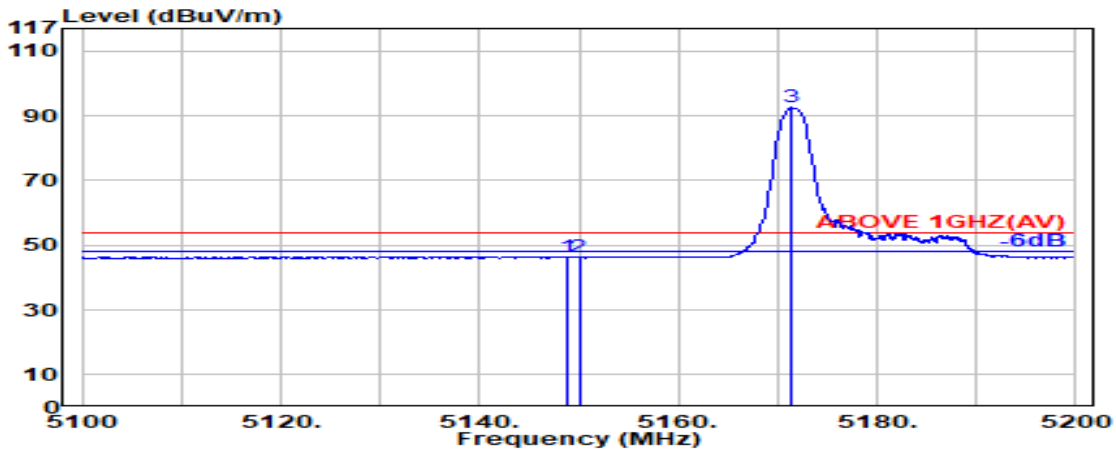


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.19	43.85	46.53	54.00	7.47	Average
5150.000	33.50	8.37	39.19	43.54	46.22	54.00	7.78	Average
@ 5171.400	33.63	8.40	39.19	89.68	92.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

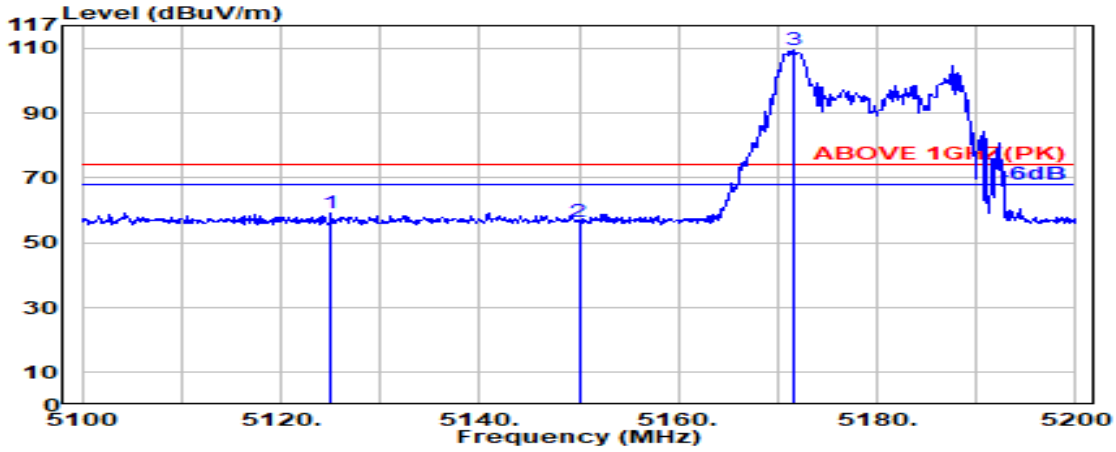

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.100	33.45	8.35	39.19	56.53	59.13	74.00	14.87	Peak
5150.000	33.50	8.37	39.19	53.91	56.59	74.00	17.41	Peak
@ 5171.600	33.63	8.40	39.19	106.84	109.67	---	---	Peak

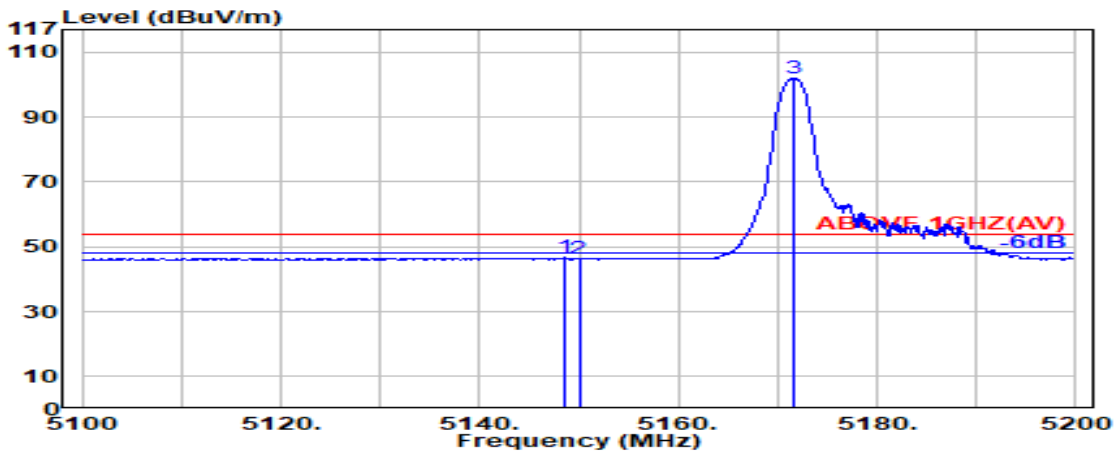


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.50	8.37	39.19	43.92	46.60	54.00	7.40	Average
5150.000	33.50	8.37	39.19	43.49	46.17	54.00	7.83	Average
@ 5171.600	33.63	8.40	39.19	99.09	101.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

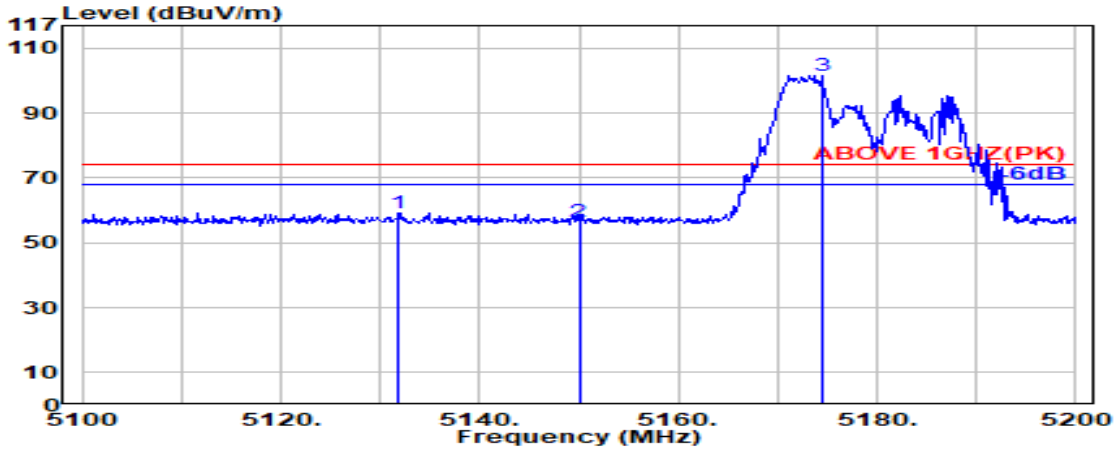

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.900	33.46	8.36	39.19	56.55	59.18	74.00	14.82	Peak
5150.000	33.50	8.37	39.19	53.89	56.57	74.00	17.43	Peak
@ 5174.400	33.65	8.40	39.19	98.79	101.65	---	---	Peak

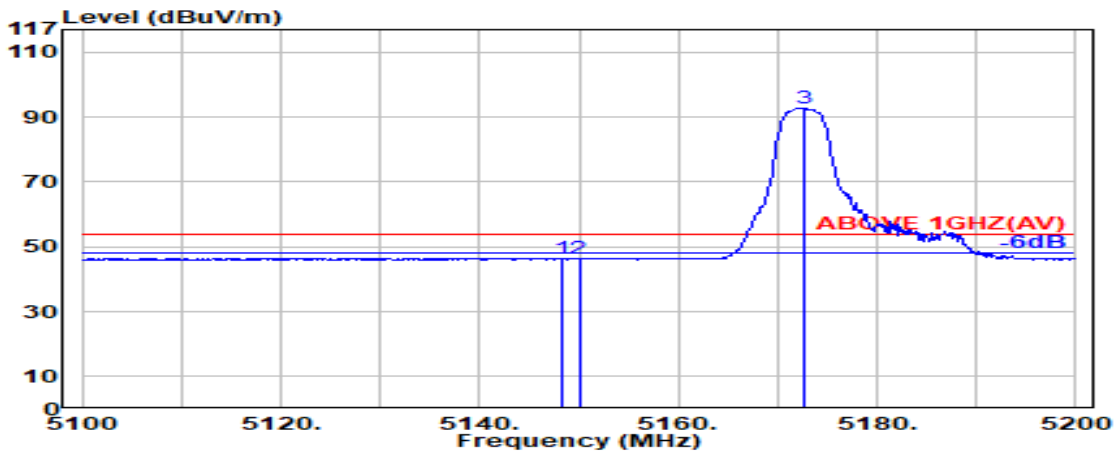


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.50	8.37	39.19	43.82	46.50	54.00	7.50	Average
5150.000	33.50	8.37	39.19	43.58	46.26	54.00	7.74	Average
@ 5172.600	33.64	8.40	39.19	89.95	92.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

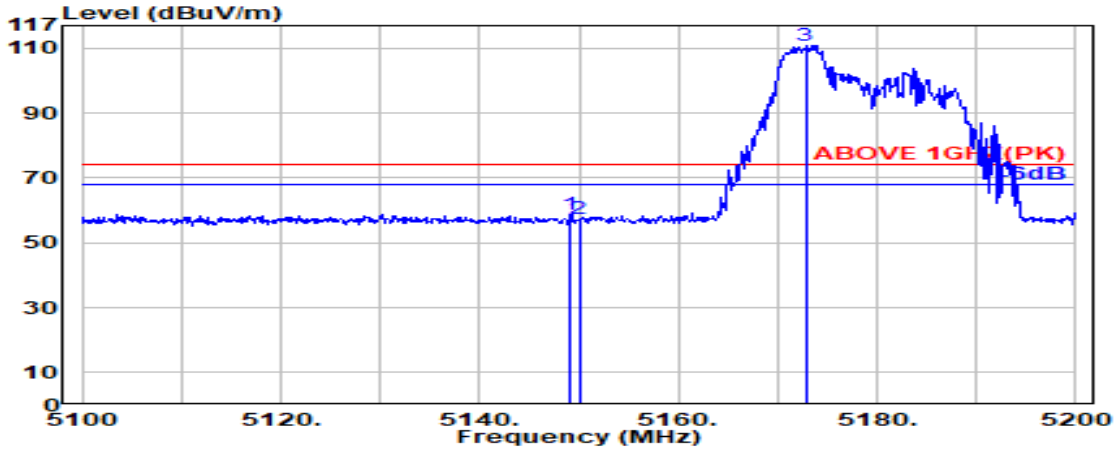

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	56.24	58.92	74.00	15.08	Peak
5150.000	33.50	8.37	39.19	54.53	57.21	74.00	16.79	Peak
@ 5172.800	33.64	8.40	39.19	107.98	110.83	---	---	Peak

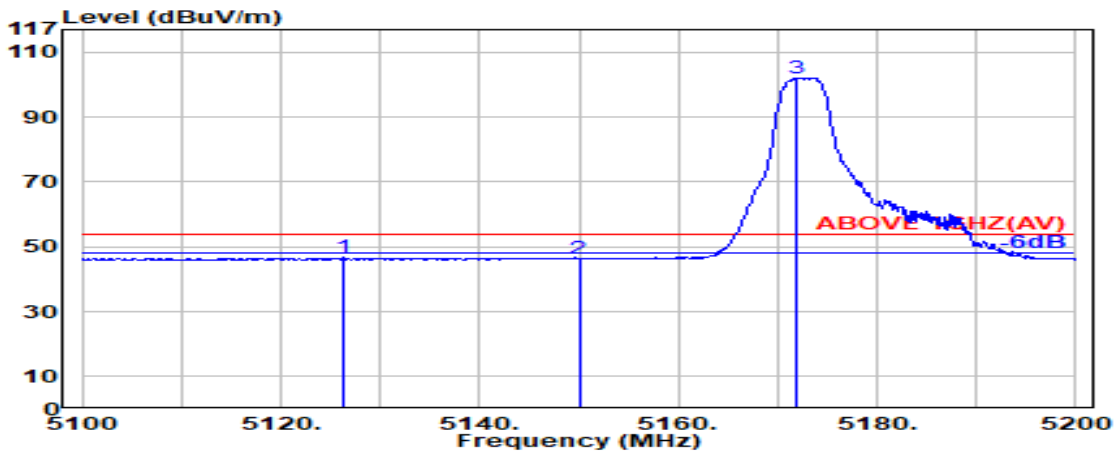


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.200	33.45	8.35	39.19	43.99	46.60	54.00	7.40	Average
5150.000	33.50	8.37	39.19	43.54	46.22	54.00	7.78	Average
@ 5172.000	33.63	8.40	39.19	99.31	102.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

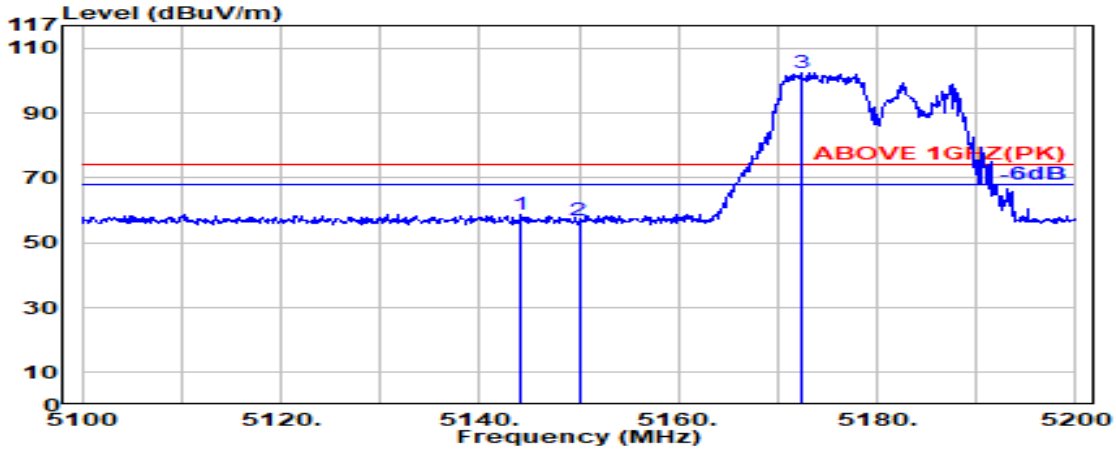

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	33.49	8.37	39.19	56.18	58.84	74.00	15.16	Peak
5150.000	33.50	8.37	39.19	54.31	56.99	74.00	17.01	Peak
@ 5172.400	33.63	8.40	39.19	99.80	102.64	---	---	Peak

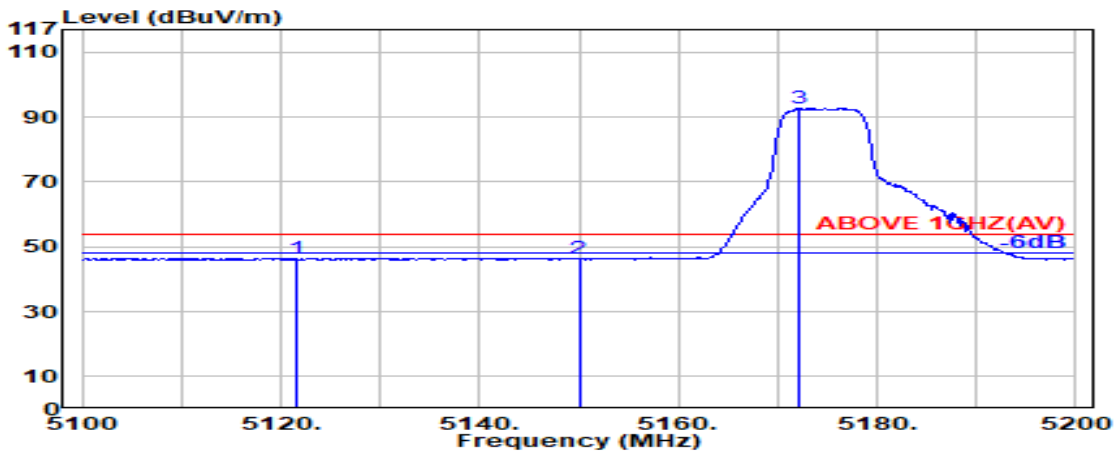


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.500	33.44	8.35	39.19	43.95	46.54	54.00	7.46	Average
5150.000	33.50	8.37	39.19	43.60	46.28	54.00	7.72	Average
@ 5172.200	33.63	8.40	39.19	89.90	92.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

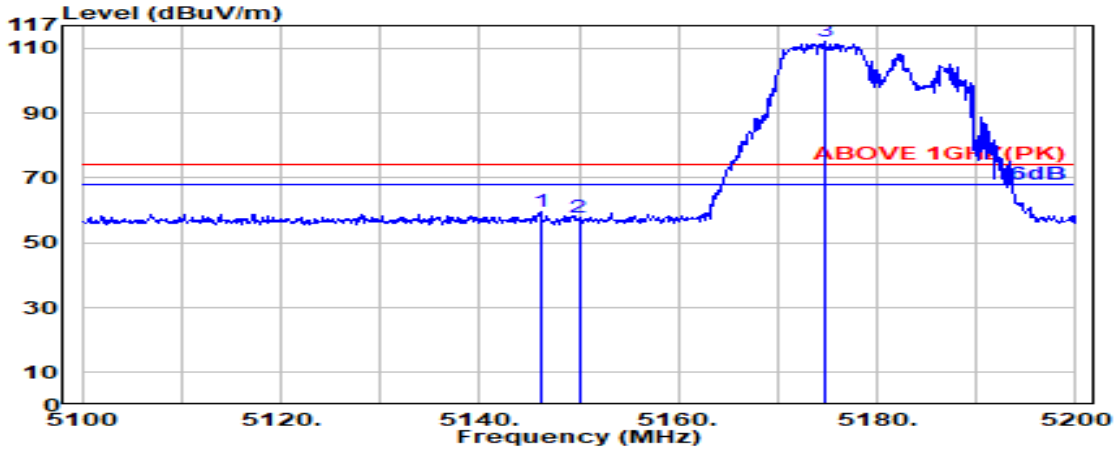

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	33.49	8.37	39.19	56.80	59.47	74.00	14.53	Peak
5150.000	33.50	8.37	39.19	55.00	57.68	74.00	16.32	Peak
@ 5174.700	33.65	8.40	39.19	109.38	112.24	--	---	Peak

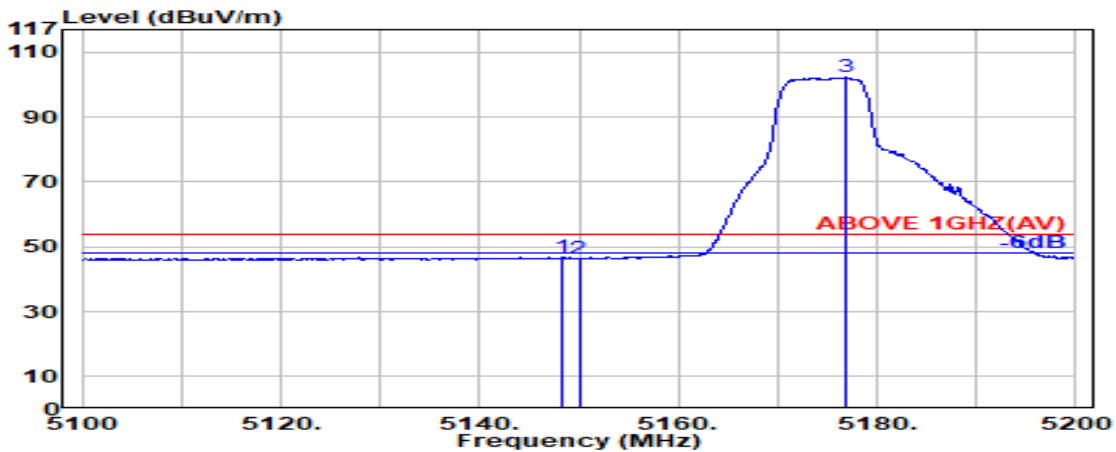


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.50	8.37	39.19	43.98	46.66	54.00	7.34	Average
5150.000	33.50	8.37	39.19	43.71	46.39	54.00	7.61	Average
@ 5176.800	33.66	8.40	39.19	99.36	102.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

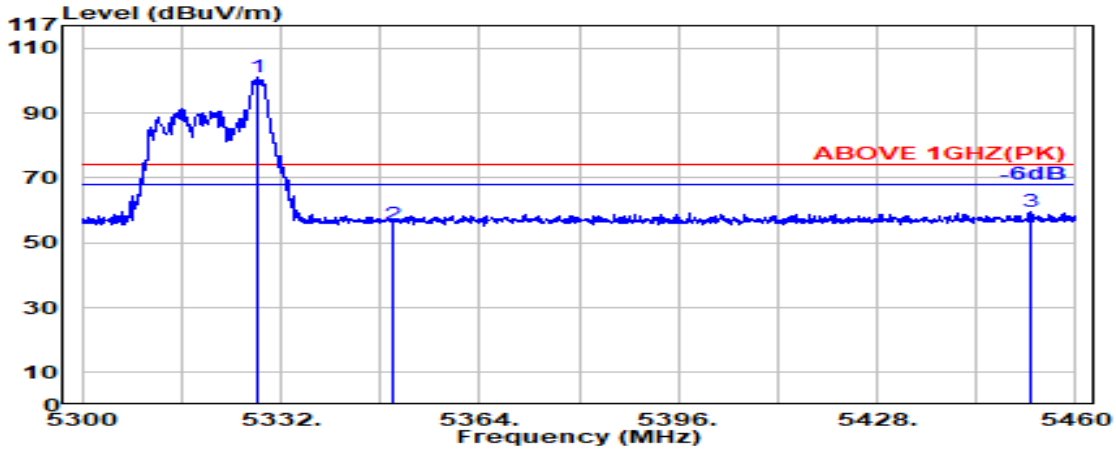

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	98.03	101.15	---	---	Peak
5350.000	33.70	8.57	39.17	52.69	55.80	74.00	18.20	Peak
5452.600	34.01	8.67	39.16	56.16	59.69	74.00	14.31	Peak

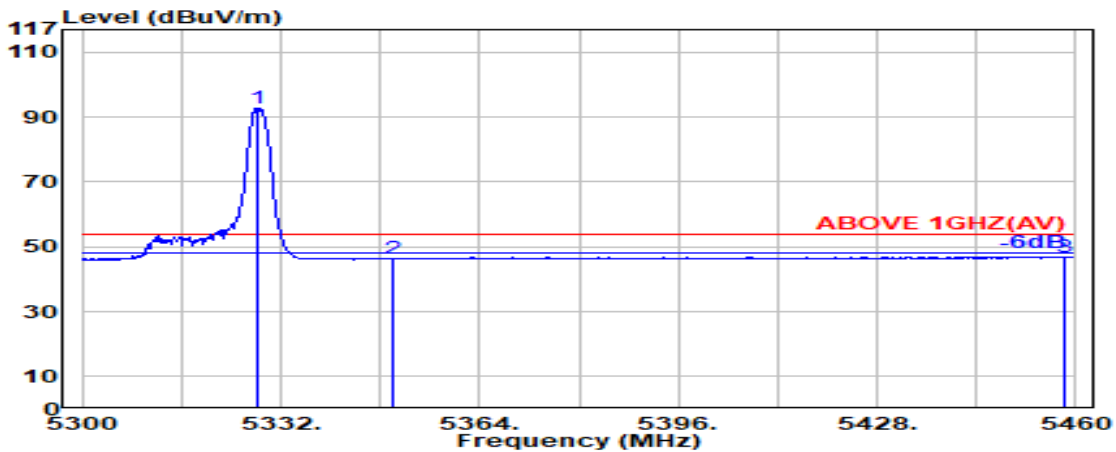


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	89.68	92.80	---	---	Average
5350.000	33.70	8.57	39.17	43.22	46.33	54.00	7.67	Average
5458.200	34.02	8.68	39.15	43.41	46.95	54.00	7.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

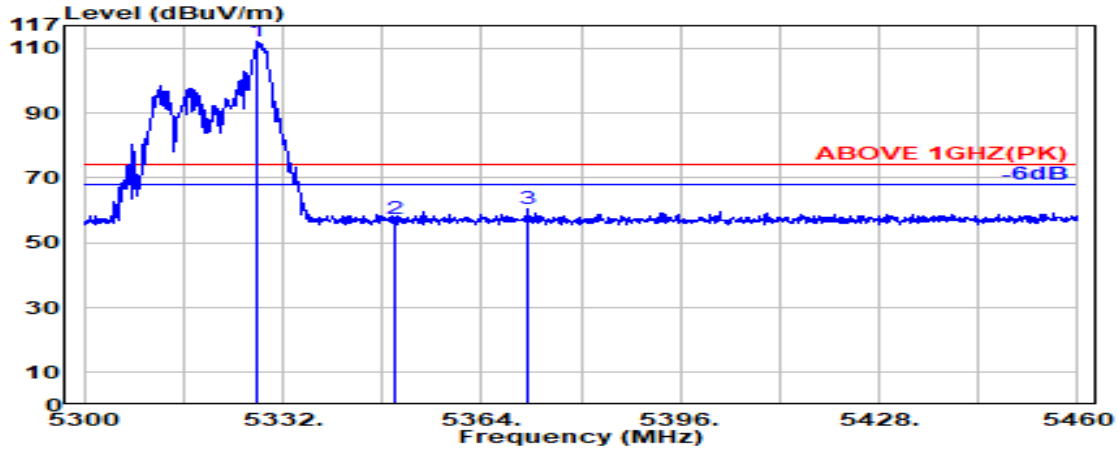

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.800	33.74	8.55	39.17	108.91	112.04	---	---	Peak
5350.000	33.70	8.57	39.17	54.28	57.39	74.00	16.61	Peak
5371.500	33.79	8.59	39.16	57.06	60.28	74.00	13.72	Peak

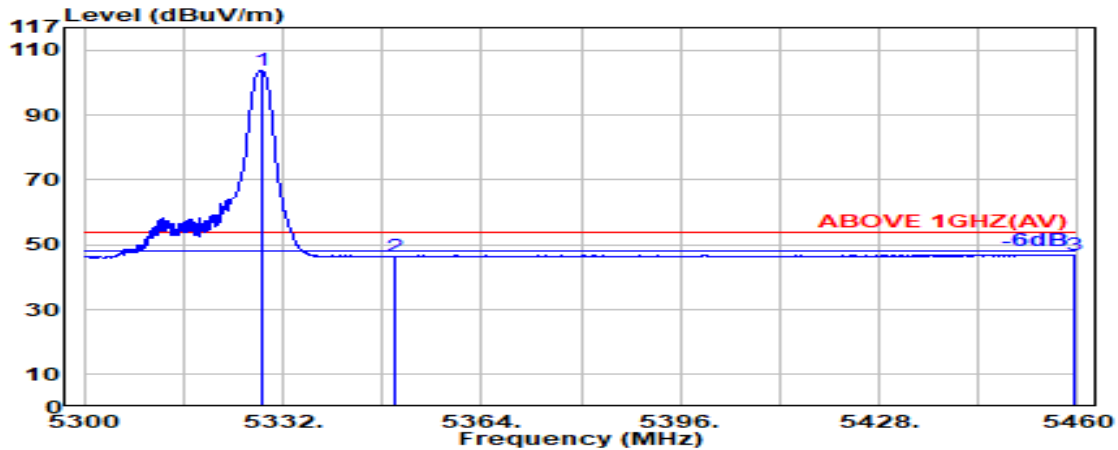


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.500	33.74	8.55	39.17	100.68	103.81	---	---	Average
5350.000	33.70	8.57	39.17	43.20	46.31	54.00	7.69	Average
5459.400	34.02	8.68	39.15	43.41	46.95	54.00	7.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

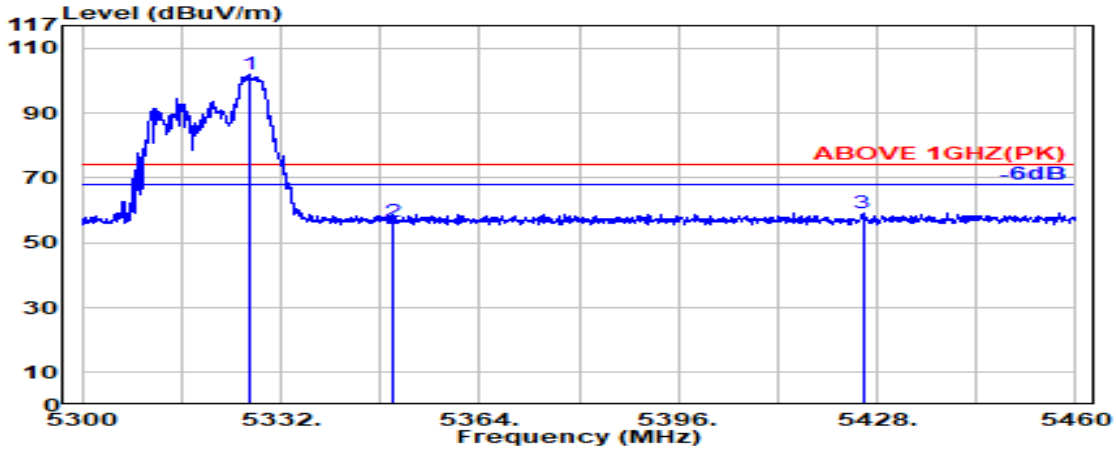

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.75	8.55	39.17	98.80	101.92	---	---	Peak
5350.000	33.70	8.57	39.17	53.53	56.63	74.00	17.37	Peak
5425.700	33.95	8.65	39.16	55.90	59.34	74.00	14.66	Peak

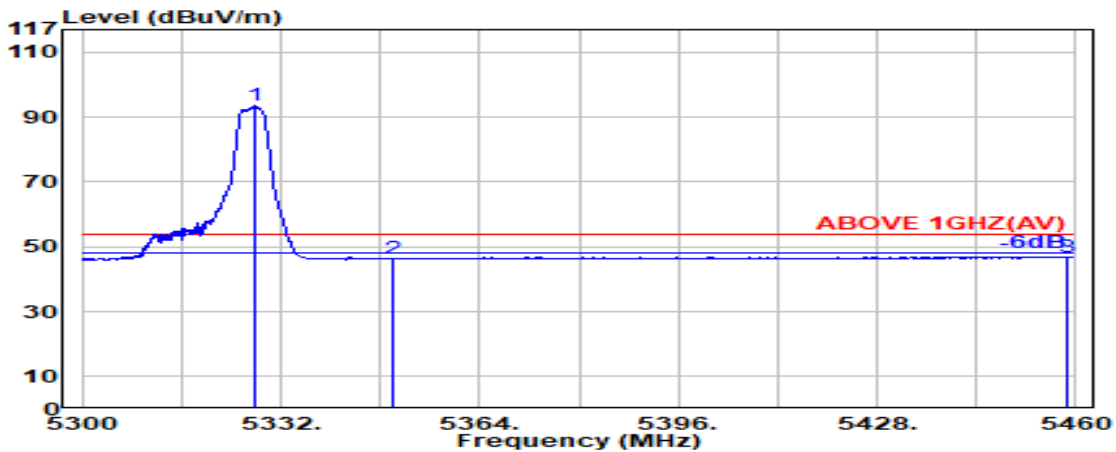


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.17	90.29	93.42	---	---	Average
5350.000	33.70	8.57	39.17	43.31	46.42	54.00	7.58	Average
5458.600	34.02	8.68	39.15	43.45	46.99	54.00	7.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

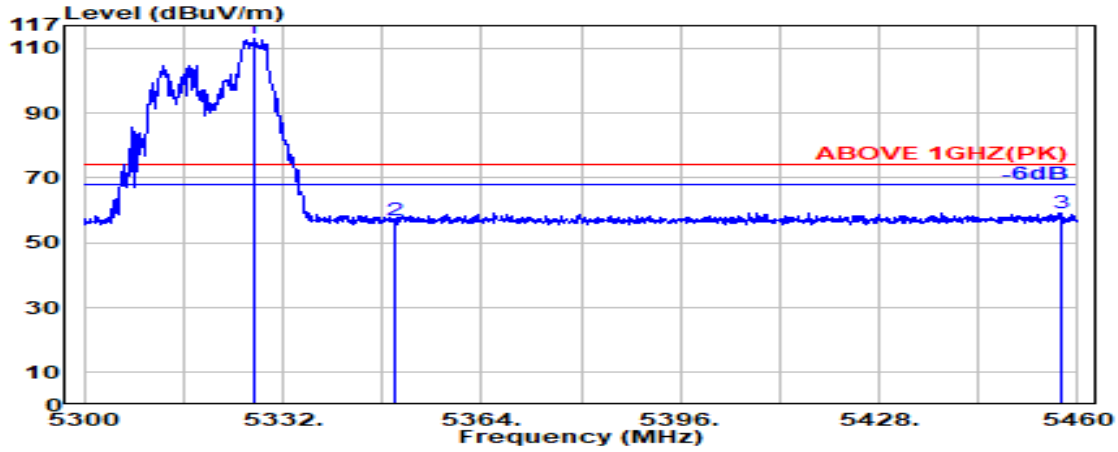

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.75	8.55	39.17	110.03	113.16	---	---	Peak
5350.000	33.70	8.57	39.17	53.89	57.00	74.00	17.00	Peak
5457.200	34.01	8.68	39.15	55.77	59.30	74.00	14.70	Peak

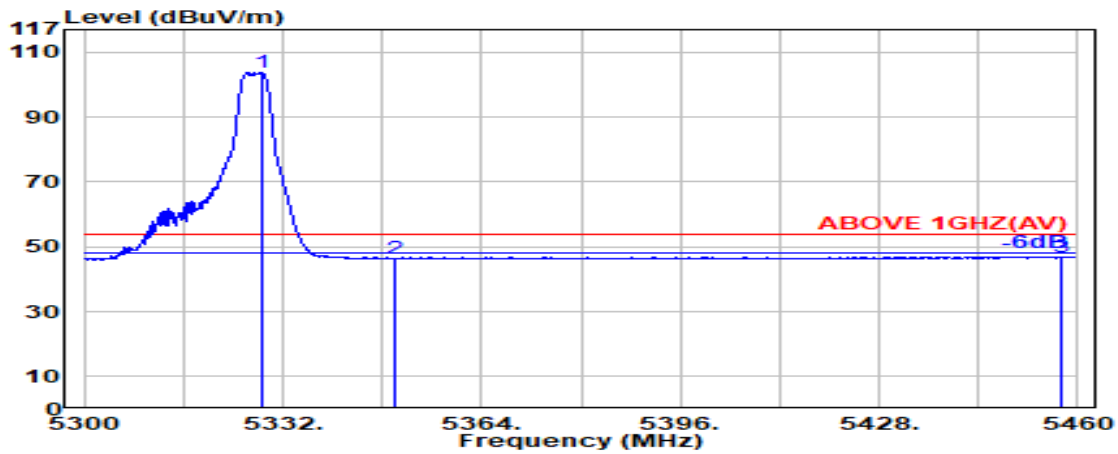


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.74	8.55	39.17	100.65	103.77	---	---	Average
5350.000	33.70	8.57	39.17	43.23	46.33	54.00	7.67	Average
5457.200	34.01	8.68	39.15	43.44	46.97	54.00	7.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

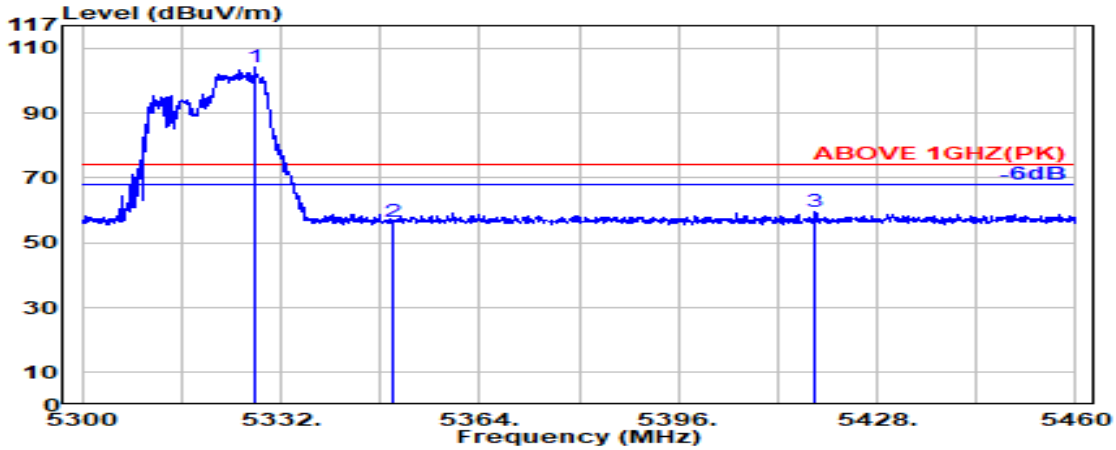

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.74	8.55	39.17	101.24	104.36	---	---	Peak
5350.000	33.70	8.57	39.17	53.19	56.30	74.00	17.70	Peak
5418.100	33.94	8.64	39.16	56.01	59.42	74.00	14.58	Peak

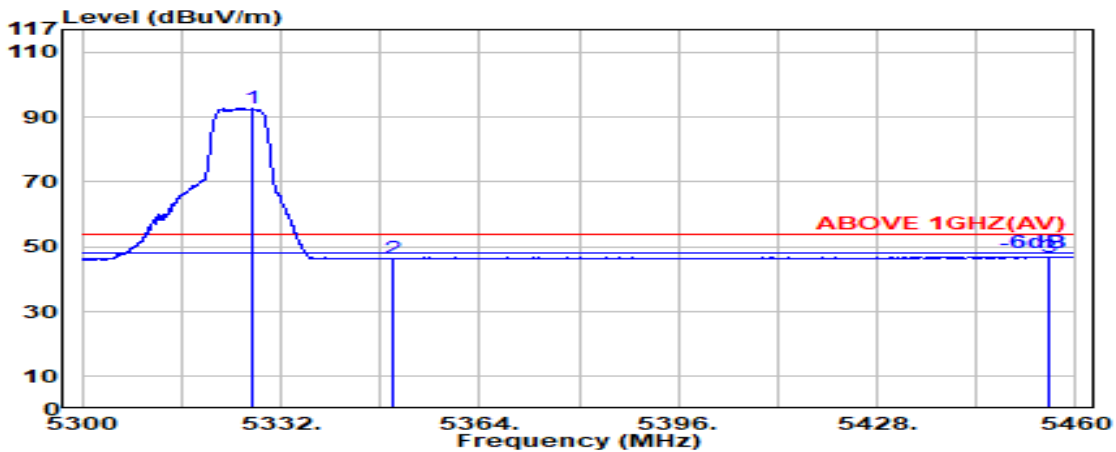


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.74	8.55	39.17	89.71	92.84	---	---	Average
5350.000	33.70	8.57	39.17	43.22	46.33	54.00	7.67	Average
5455.500	34.01	8.67	39.16	43.41	46.94	54.00	7.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

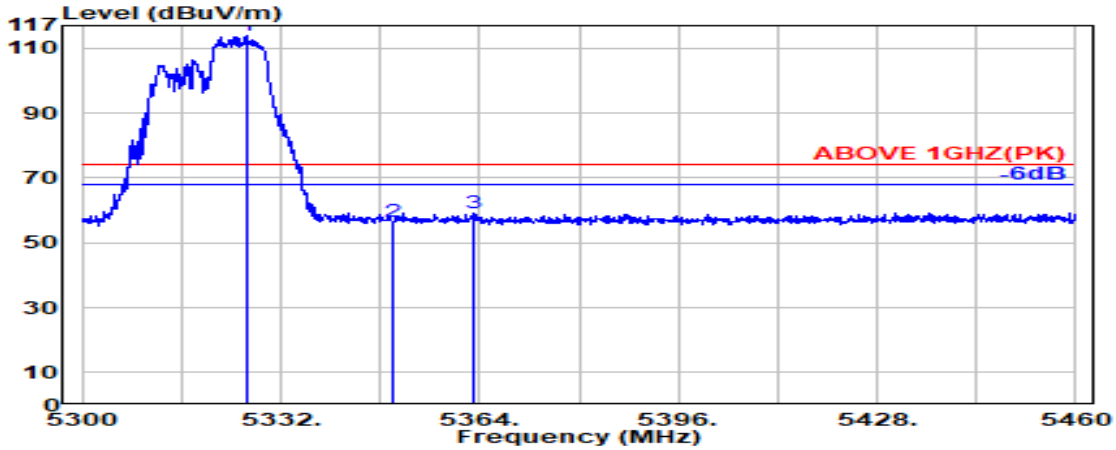

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.400	33.75	8.55	39.17	110.78	113.90	---	---	Peak
5350.000	33.70	8.57	39.17	53.47	56.58	74.00	17.42	Peak
5363.200	33.75	8.59	39.17	56.20	59.37	74.00	14.63	Peak

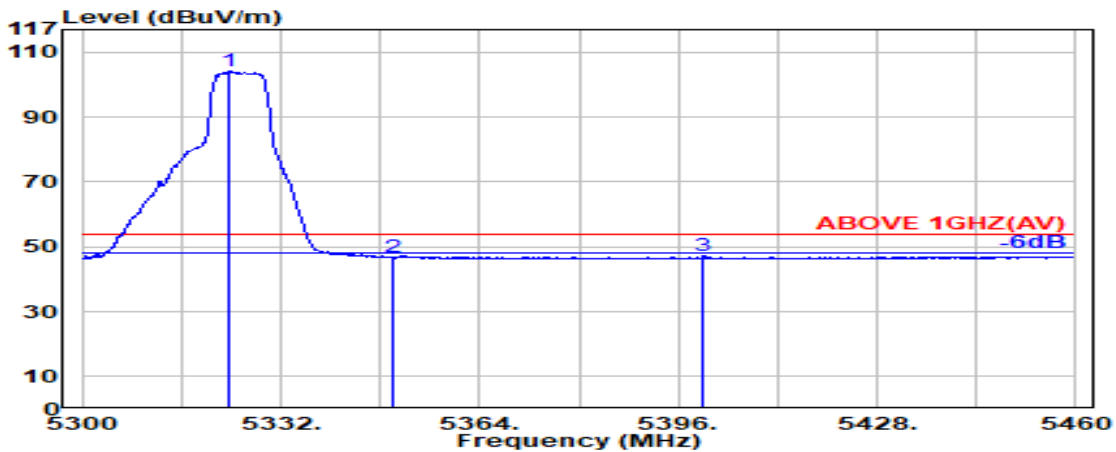


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	33.75	8.55	39.17	100.89	104.02	---	---	Average
5350.000	33.70	8.57	39.17	43.76	46.87	54.00	7.13	Average
5400.100	33.90	8.62	39.16	43.97	47.33	54.00	6.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

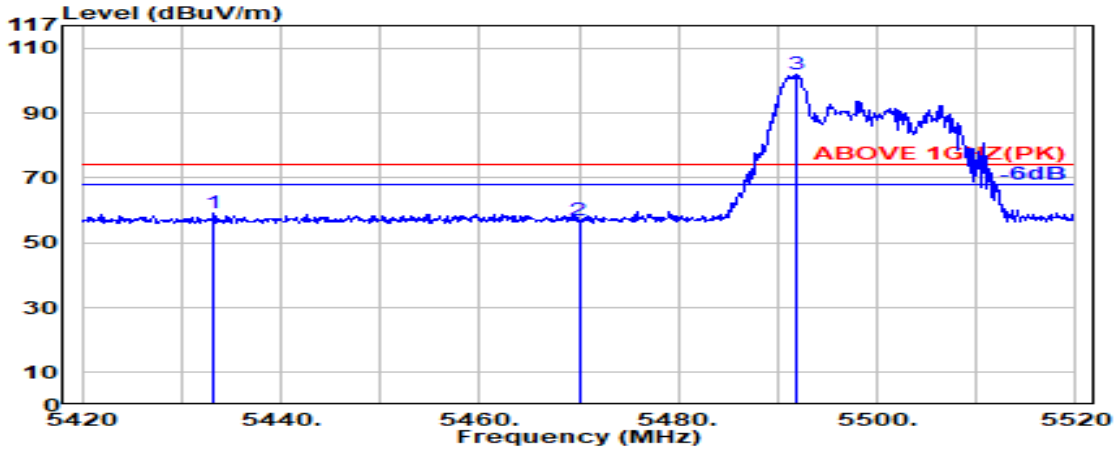

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.200	33.97	8.65	39.16	55.50	58.96	74.00	15.04	Peak
5470.000	34.04	8.69	39.15	53.21	56.79	74.00	17.21	Peak
@ 5491.900	34.08	8.71	39.15	98.29	101.93	---	---	Peak

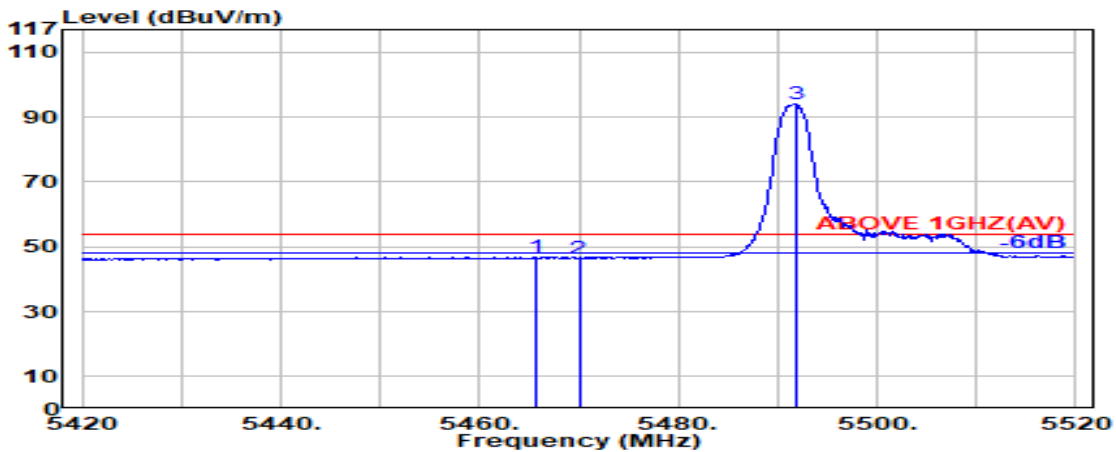


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.03	8.68	39.15	43.33	46.89	54.00	7.11	Average
5470.000	34.04	8.69	39.15	43.00	46.58	54.00	7.42	Average
@ 5491.800	34.08	8.71	39.15	90.43	94.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

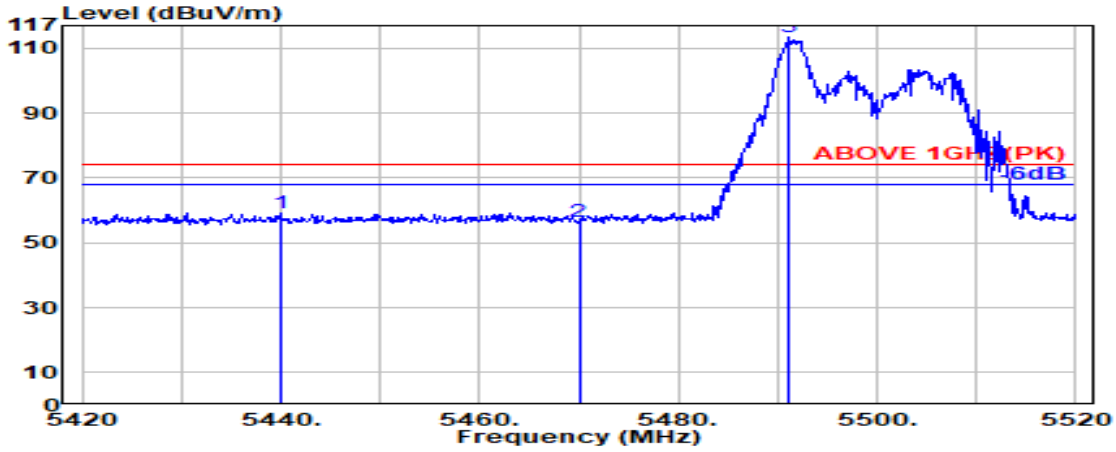

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.000	33.98	8.66	39.16	55.89	59.37	74.00	14.63	Peak
5470.000	34.04	8.69	39.15	52.81	56.38	74.00	17.62	Peak
@ 5491.100	34.08	8.71	39.15	109.87	113.51	---	---	Peak

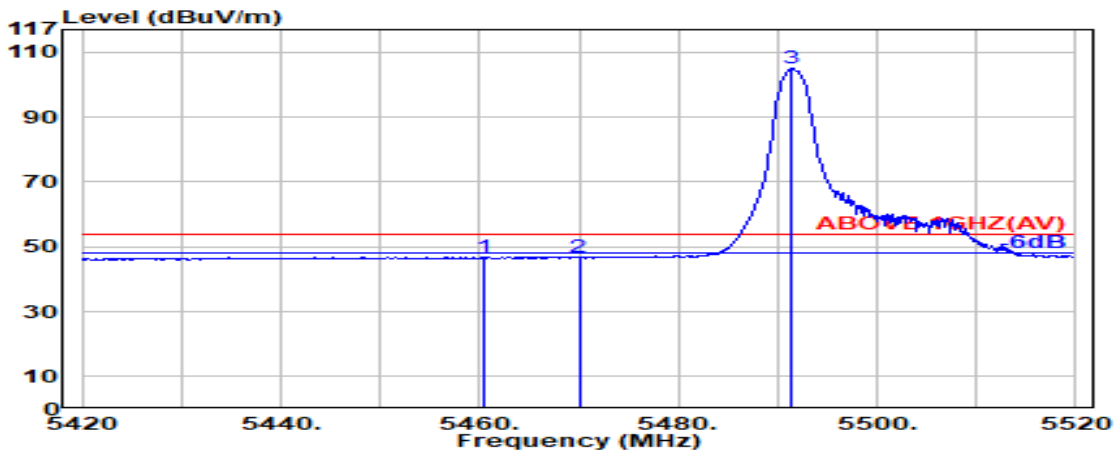


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.400	34.02	8.68	39.15	43.40	46.95	54.00	7.05	Average
5470.000	34.04	8.69	39.15	43.08	46.66	54.00	7.34	Average
@ 5491.400	34.08	8.71	39.15	101.25	104.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

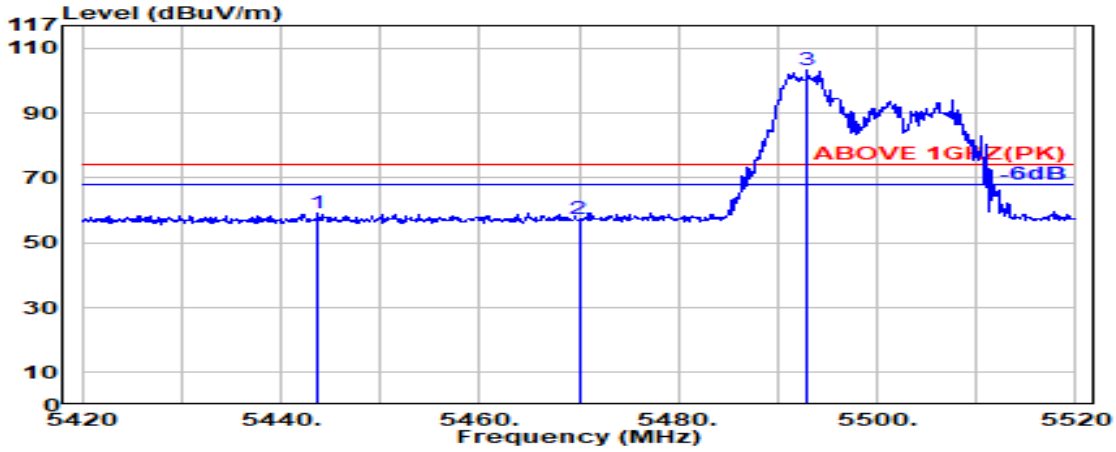

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.700	33.99	8.66	39.16	55.60	59.10	74.00	14.90	Peak
5470.000	34.04	8.69	39.15	53.74	57.32	74.00	16.68	Peak
@ 5493.000	34.09	8.71	39.15	99.67	103.32	74.00	---	Peak

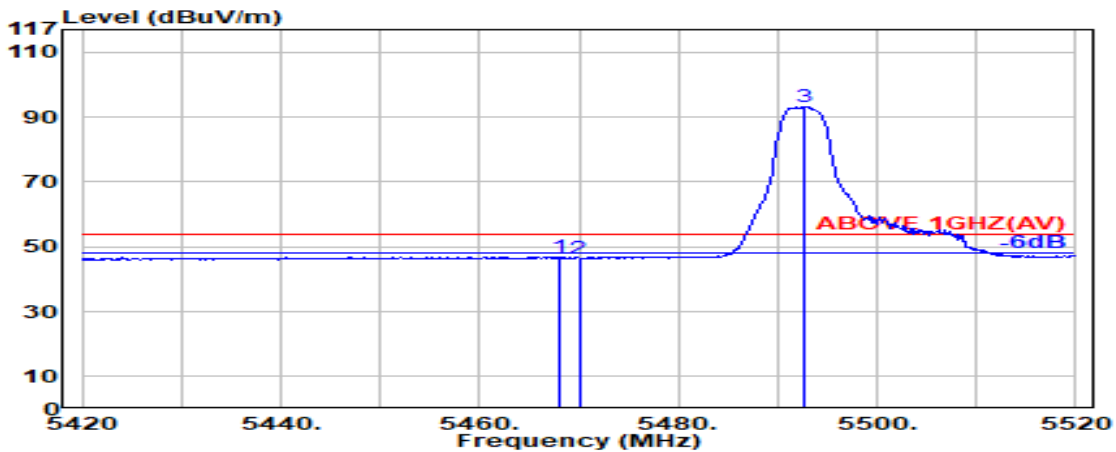


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	43.31	46.88	54.00	7.12	Average
5470.000	34.04	8.69	39.15	42.98	46.55	54.00	7.45	Average
@ 5492.700	34.09	8.71	39.15	89.59	93.23	--	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

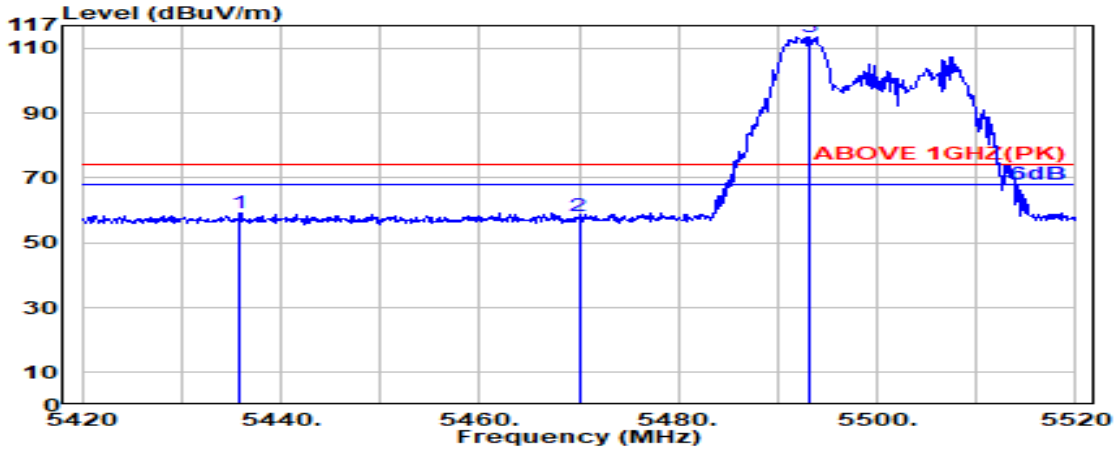

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.900	33.97	8.66	39.16	55.91	59.38	74.00	14.62	Peak
5470.000	34.04	8.69	39.15	54.86	58.43	74.00	15.57	Peak
@ 5493.100	34.09	8.71	39.15	109.86	113.50	---	---	Peak

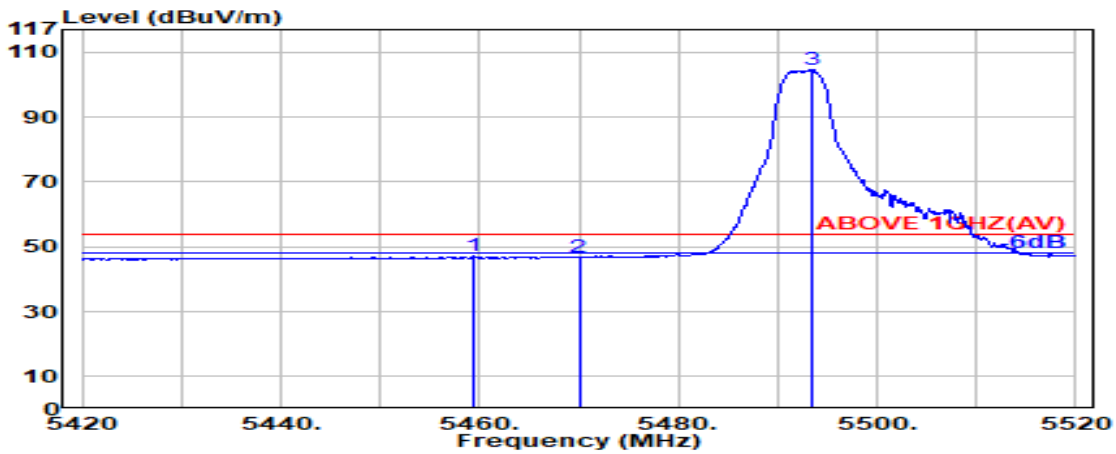


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.02	8.68	39.15	43.56	47.11	54.00	6.89	Average
5470.000	34.04	8.69	39.15	43.20	46.78	54.00	7.22	Average
@ 5493.500	34.09	8.71	39.15	100.97	104.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

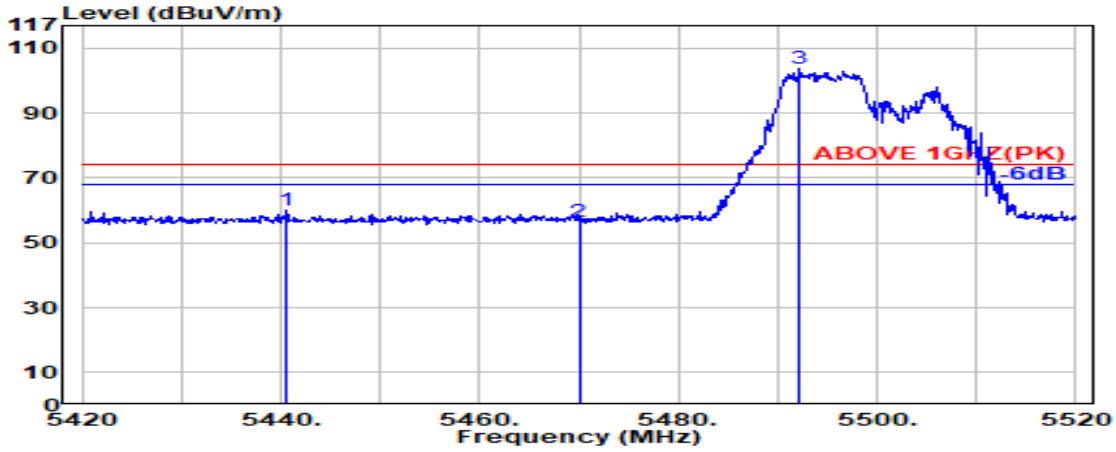

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.600	33.98	8.66	39.16	56.53	60.01	74.00	13.99	Peak
5470.000	34.04	8.69	39.15	52.92	56.50	74.00	17.50	Peak
@ 5492.200	34.08	8.71	39.15	100.28	103.92	---	---	Peak

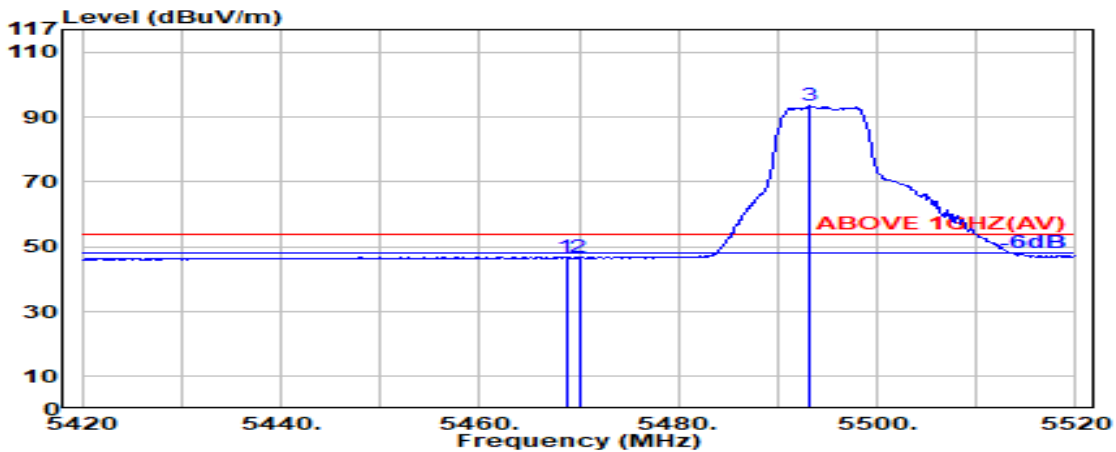


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	43.41	46.98	54.00	7.02	Average
5470.000	34.04	8.69	39.15	43.04	46.61	54.00	7.39	Average
@ 5493.200	34.09	8.71	39.15	89.81	93.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

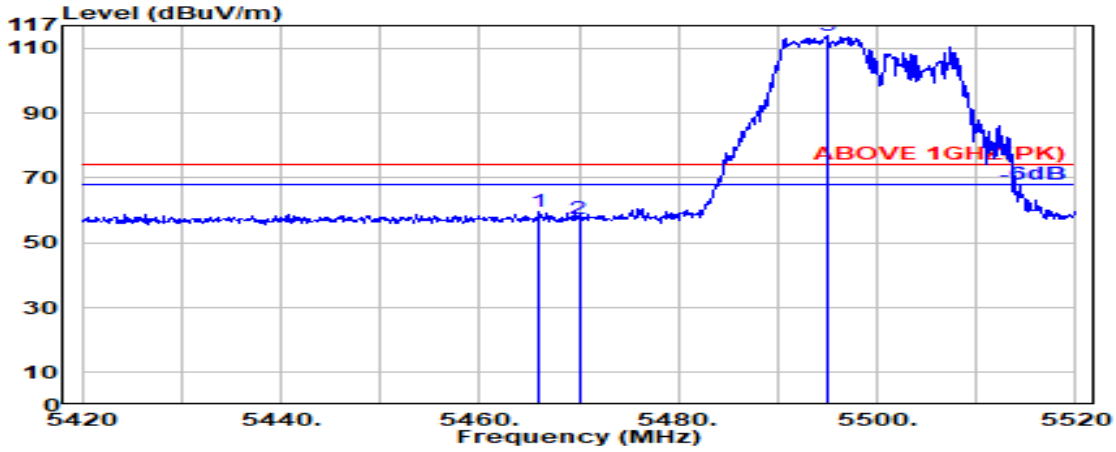

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.15	55.89	59.45	74.00	14.55	Peak
5470.000	34.04	8.69	39.15	53.75	57.33	74.00	16.67	Peak
@ 5494.900	34.09	8.71	39.15	110.36	114.01	---	---	Peak

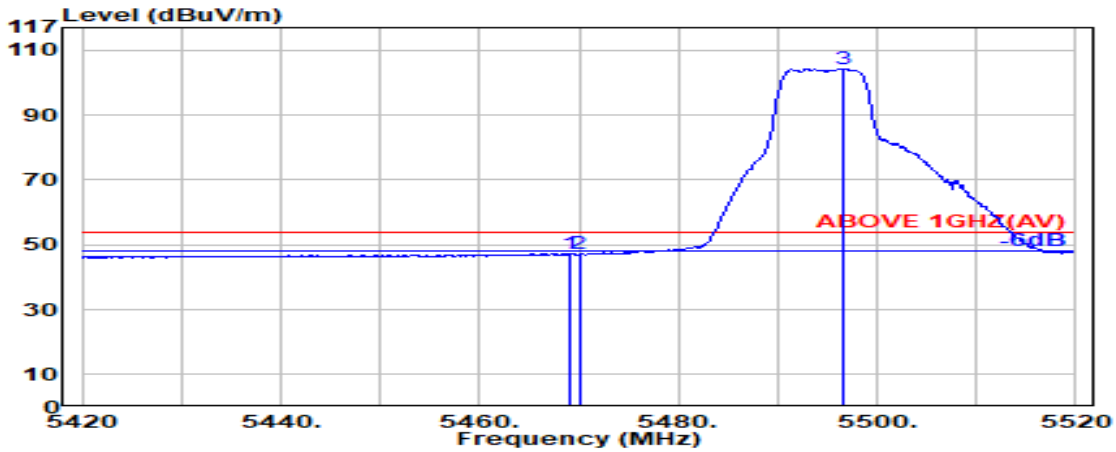


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	43.64	47.21	54.00	6.79	Peak
5470.000	34.04	8.69	39.15	43.47	47.05	54.00	6.95	Peak
@ 5496.700	34.09	8.71	39.15	100.75	104.41	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

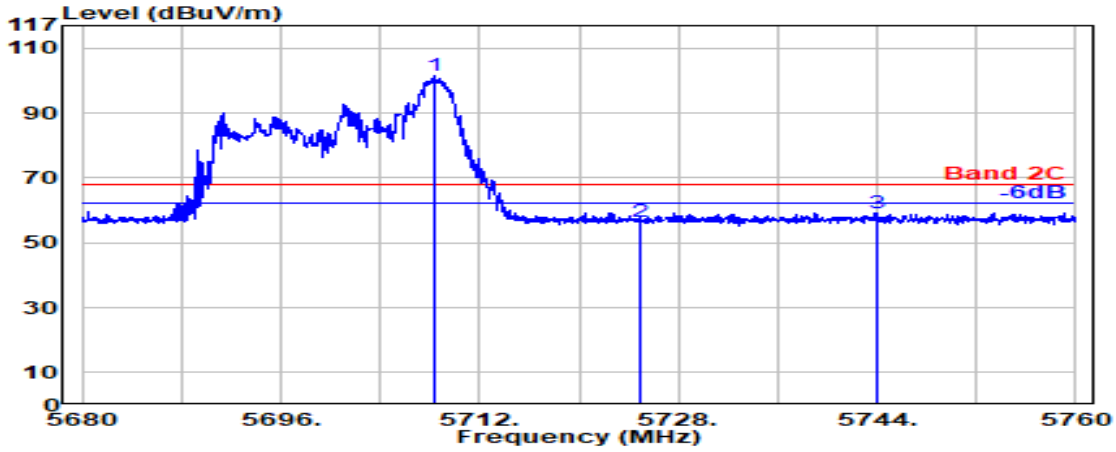

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.350	33.60	8.91	39.19	98.10	101.41	---	---	Peak
5725.000	33.60	8.93	39.20	53.07	56.40	68.20	11.80	Peak
5744.000	33.60	8.94	39.20	55.91	59.25	68.20	8.95	Peak

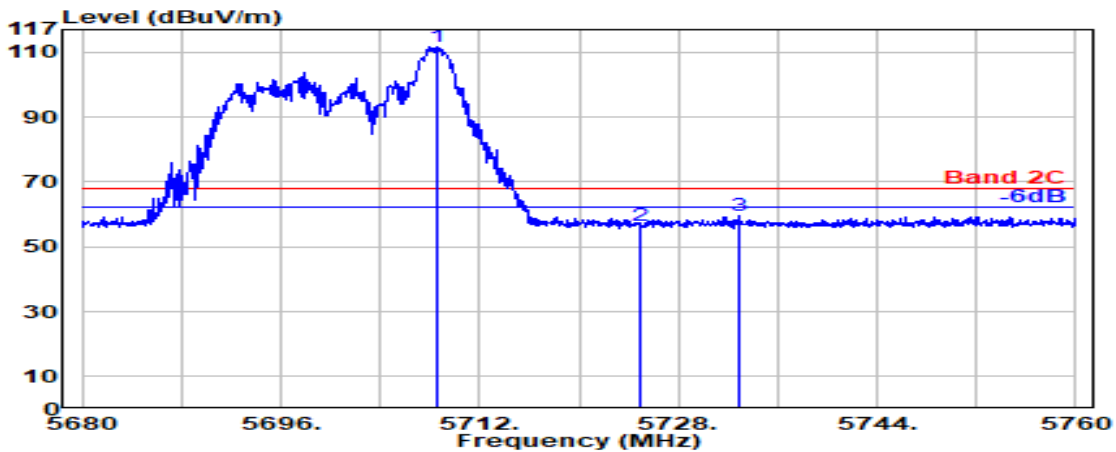


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.500	33.60	8.91	39.19	108.29	111.61	---	---	Peak
5725.000	33.60	8.93	39.20	53.30	56.63	68.20	11.57	Peak
5732.900	33.60	8.93	39.20	56.35	59.69	68.20	8.51	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

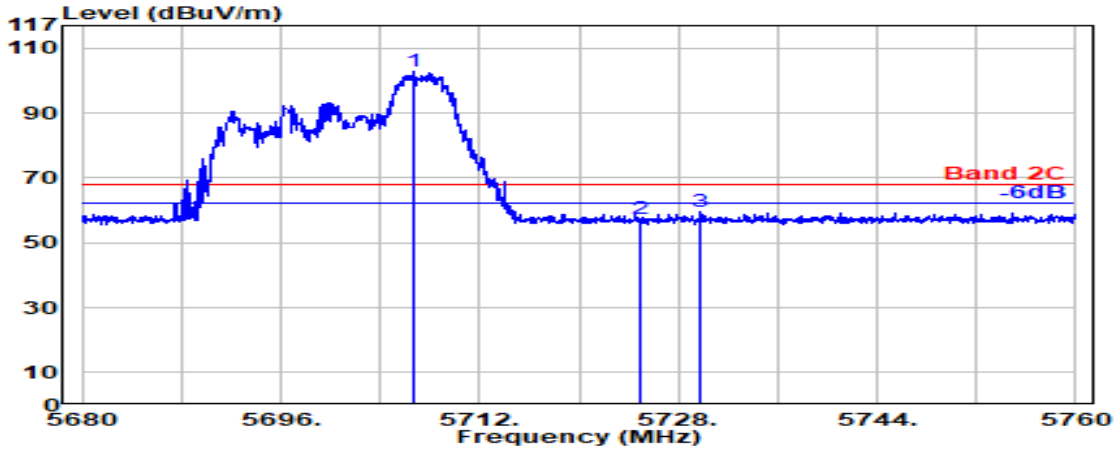

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.700	33.60	8.91	39.19	99.41	102.73	---	---	Peak
5725.000	33.60	8.93	39.20	53.87	57.20	68.20	11.00	Peak
5729.700	33.60	8.93	39.20	56.13	59.47	68.20	8.73	Peak

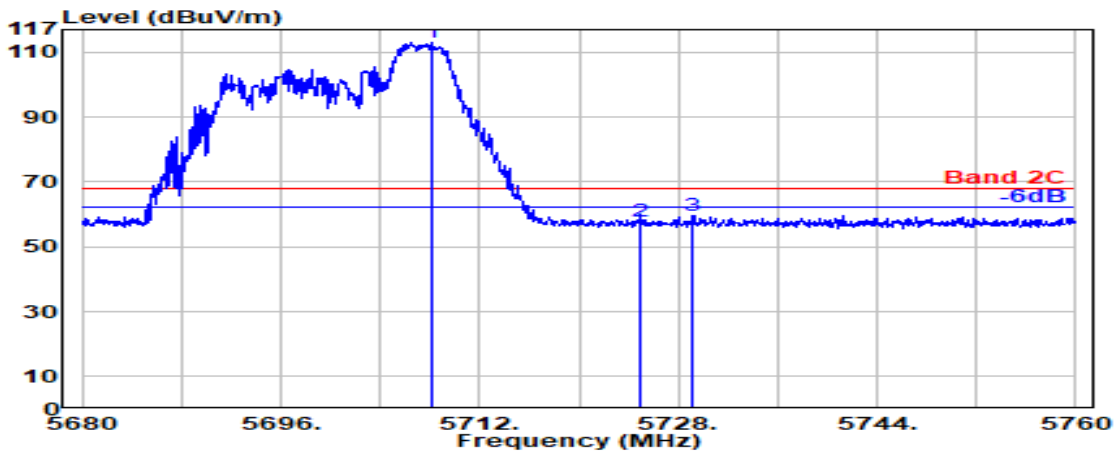


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	33.60	8.91	39.19	109.86	113.17	---	---	Peak
5725.000	33.60	8.93	39.20	54.32	57.65	68.20	10.55	Peak
5729.200	33.60	8.93	39.20	56.28	59.61	68.20	8.59	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

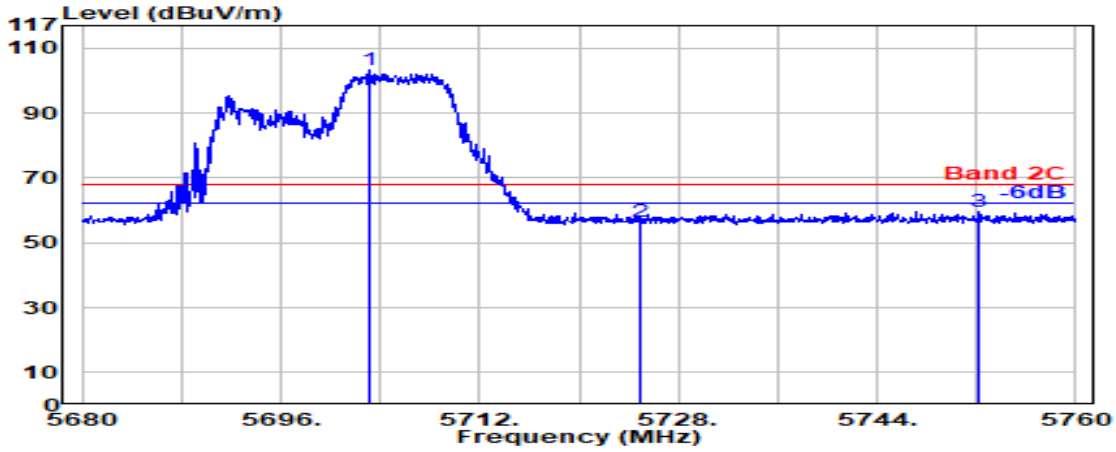

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.050	33.60	8.91	39.19	99.86	103.18	---	---	Peak
5725.000	33.60	8.93	39.20	53.18	56.51	68.20	11.69	Peak
5752.250	33.61	8.95	39.20	56.21	59.57	68.20	8.63	Peak

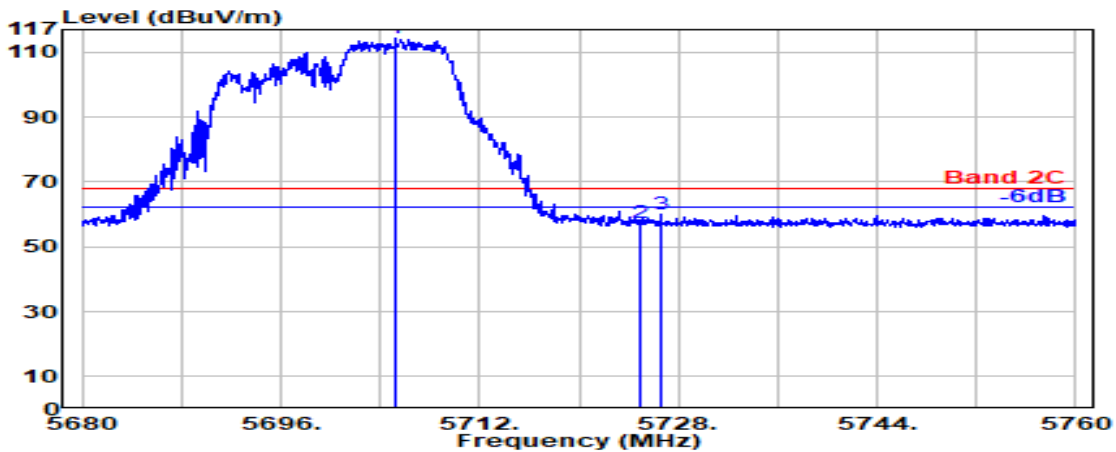


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.200	33.60	8.91	39.19	110.99	114.30	---	---	Peak
5725.000	33.60	8.93	39.20	54.18	57.51	68.20	10.69	Peak
5726.650	33.60	8.93	39.20	56.74	60.07	68.20	8.13	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

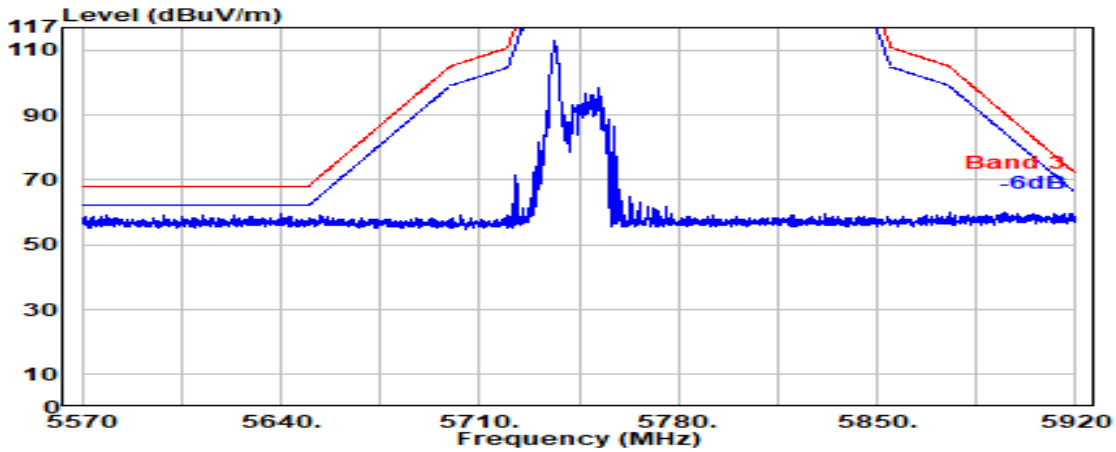


Antenna at Vertical Polarization

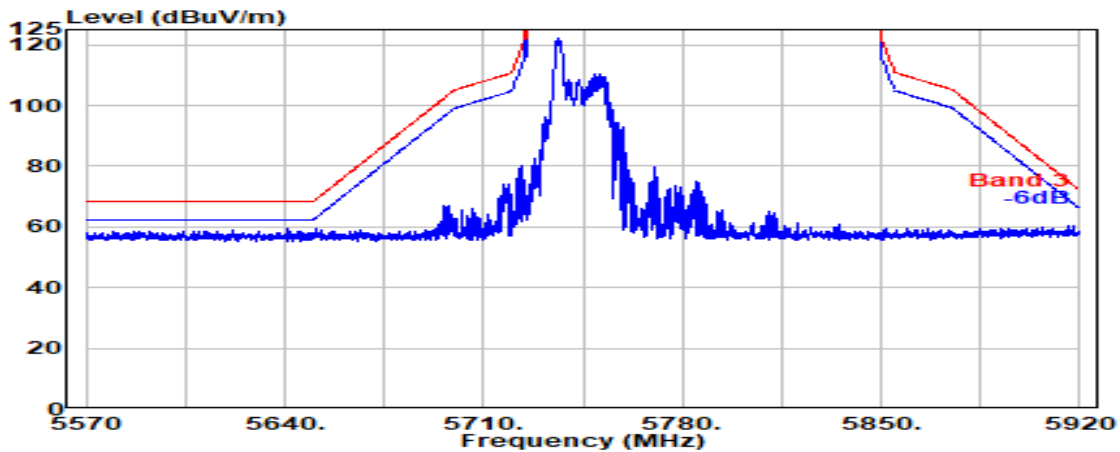


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

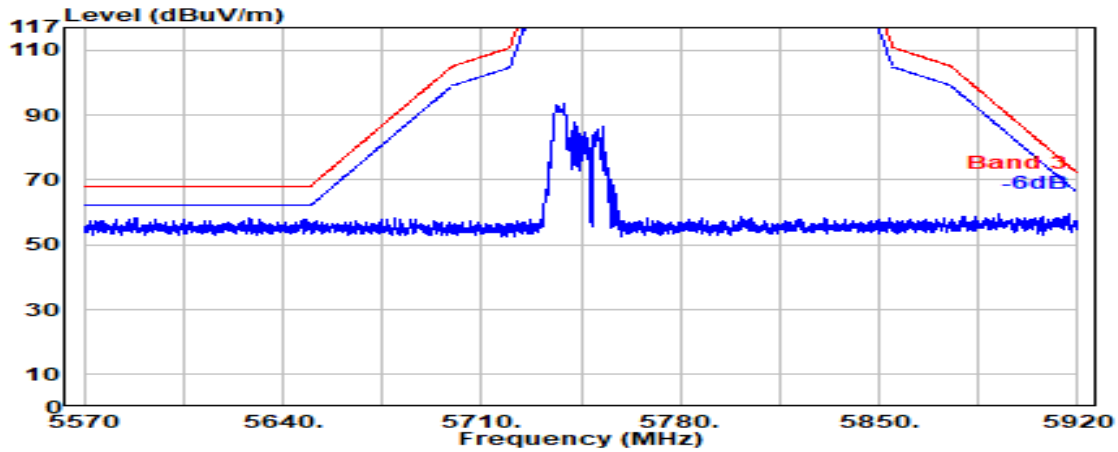


Antenna at Vertical Polarization

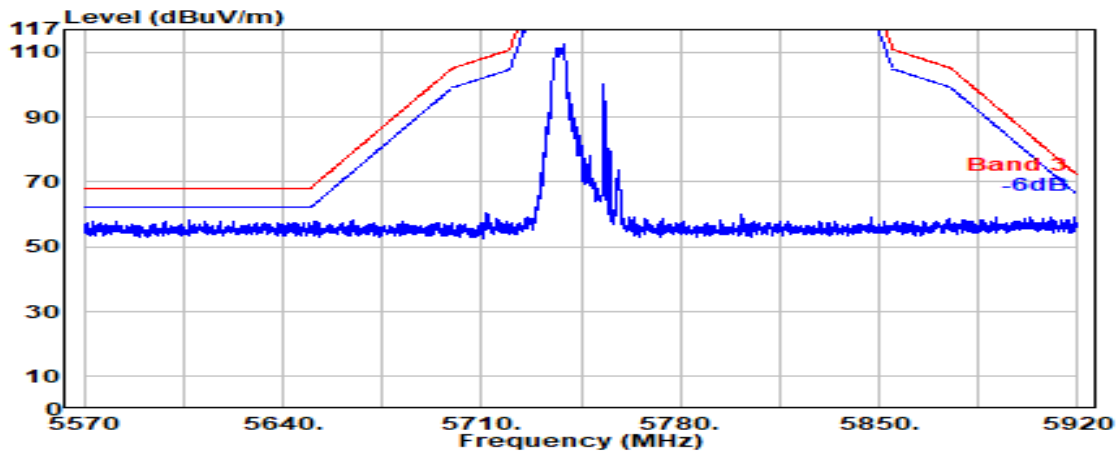


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

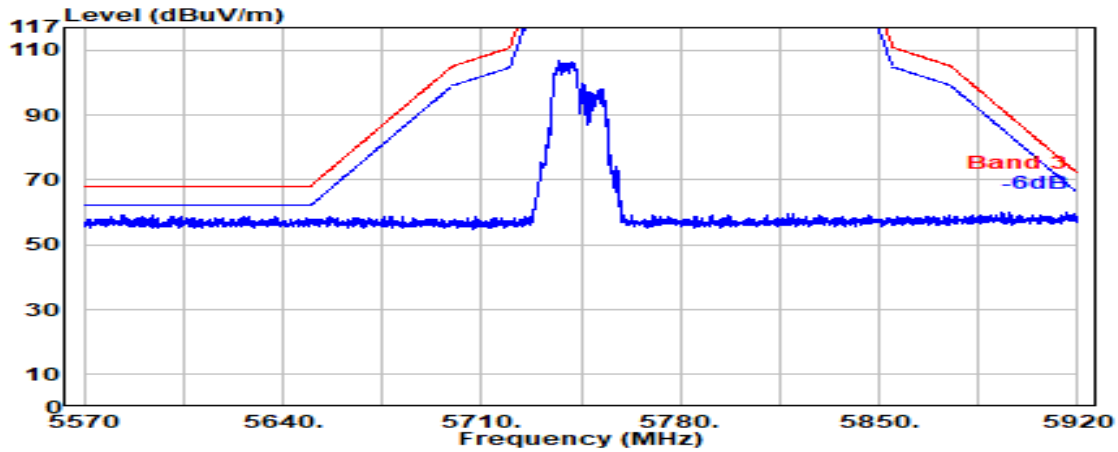


Antenna at Vertical Polarization

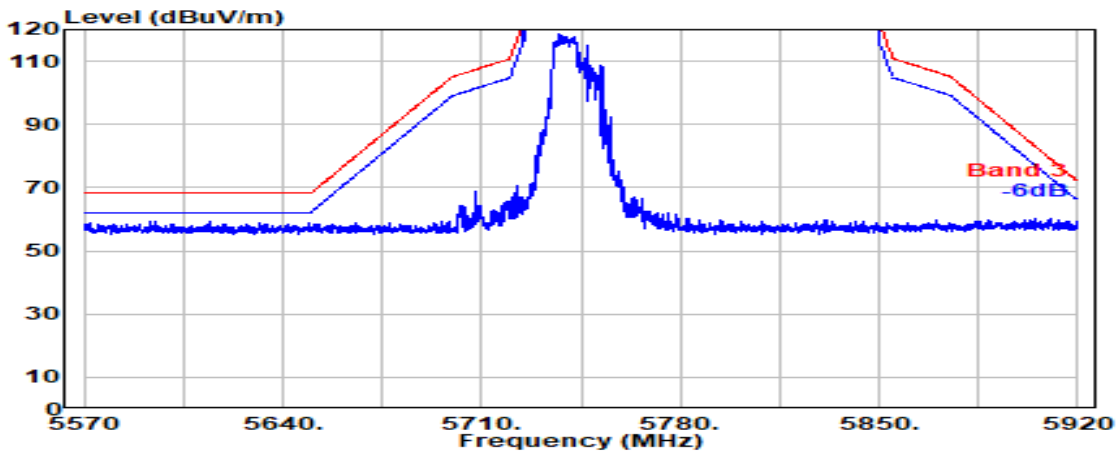


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

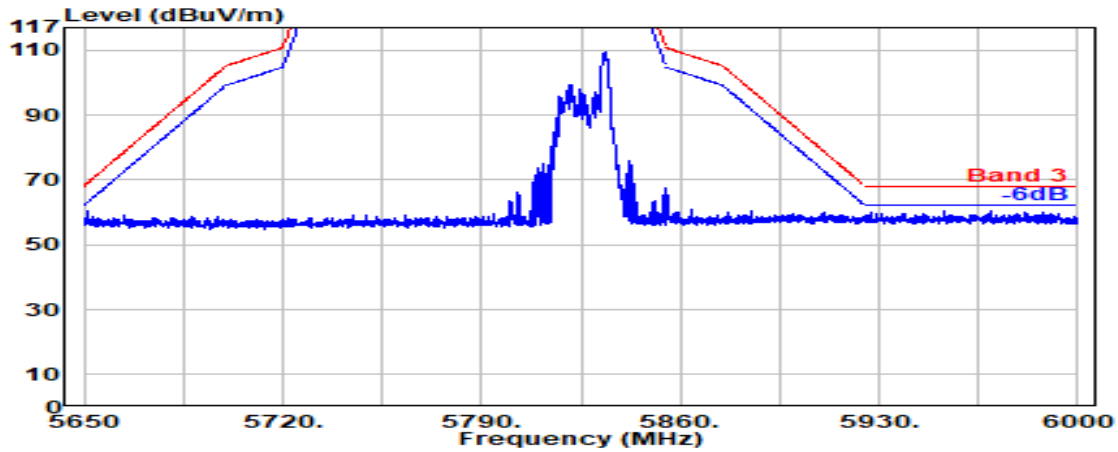


Antenna at Vertical Polarization

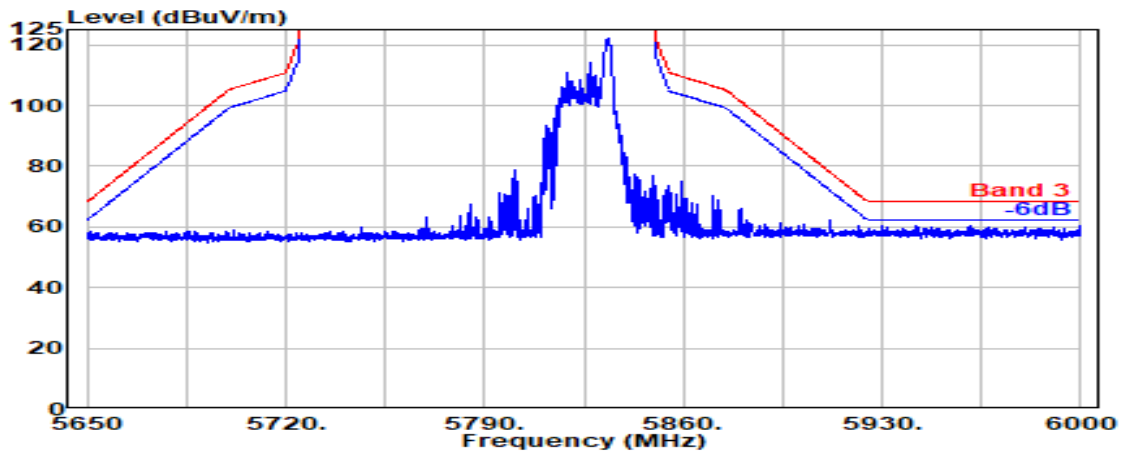


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

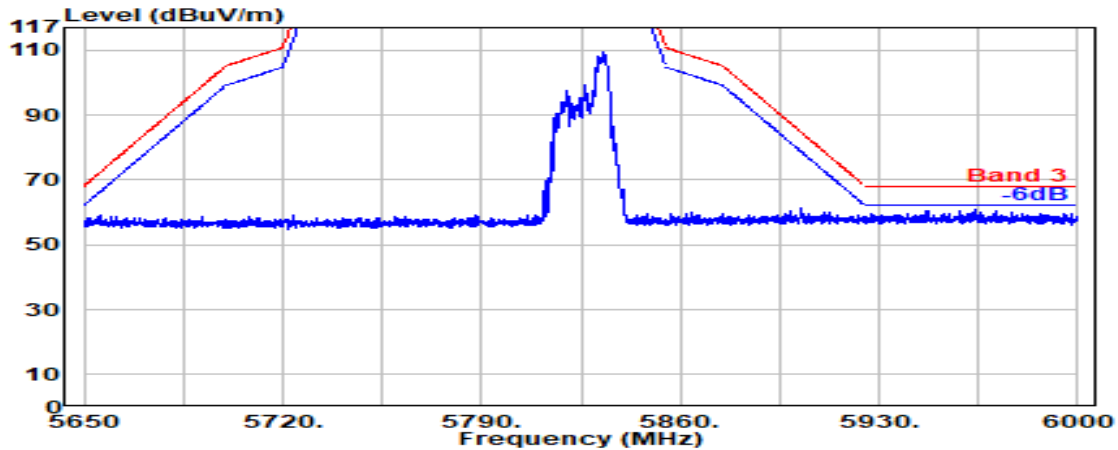


Antenna at Vertical Polarization

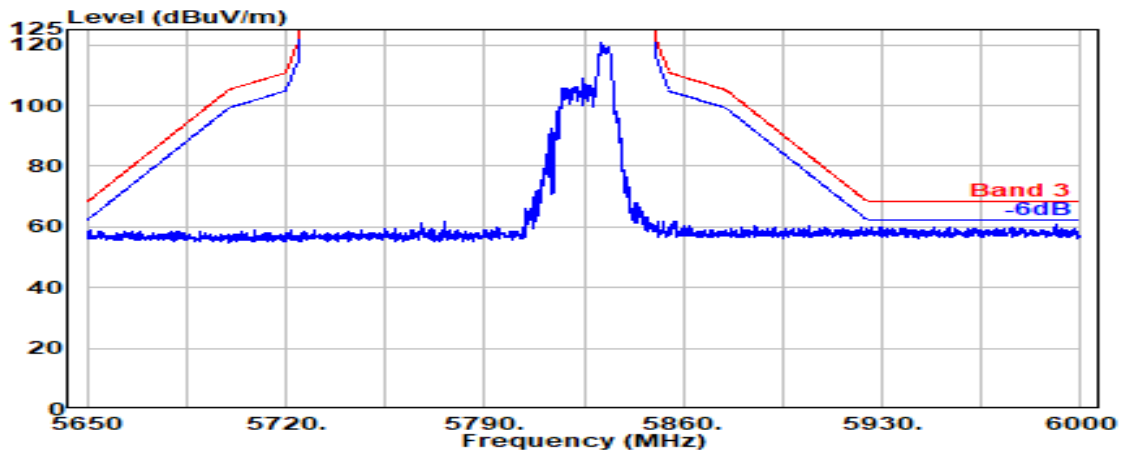

Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

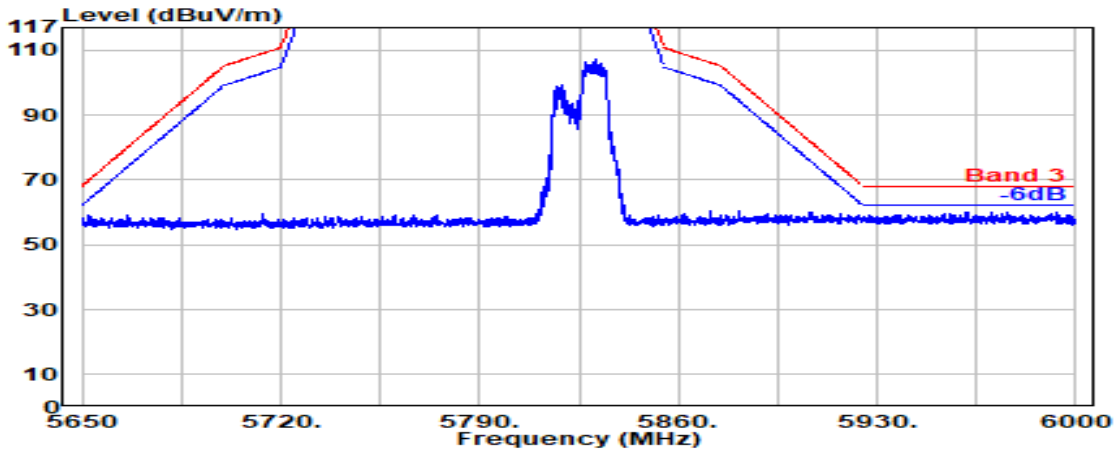

Antenna at Vertical Polarization

