

A.2 RADIATED EMISSION

Test Date	2020/08/14~20	Temp./Hum.	24 ~ 25°C/49~54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu/ Sam Chang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1 GHz

Test SKU: SKU #1 (with INPAQ Antenna)

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.78	1.23	26.53	28.41	26.89	40.00	13.11	Peak
56.190	13.30	1.76	26.47	36.45	25.04	40.00	14.96	Peak
157.070	16.73	3.14	26.02	32.61	26.46	43.50	17.04	Peak
261.830	18.84	4.14	25.76	32.69	29.91	46.00	16.09	Peak
617.820	24.84	7.13	27.48	30.50	34.99	46.00	11.01	Peak
935.980	27.03	8.88	27.04	29.36	38.23	46.00	7.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.790	20.99	1.40	26.52	40.50	36.37	40.00	3.63	Peak
75.590	12.87	2.11	26.39	43.40	31.99	40.00	8.01	Peak
95.960	15.95	2.38	26.33	35.97	27.97	43.50	15.53	Peak
107.600	17.53	2.53	26.27	33.96	27.75	43.50	15.75	Peak
128.940	18.41	2.80	26.15	31.57	26.63	43.50	16.87	Peak
966.050	27.21	9.01	26.92	29.06	38.36	54.00	15.64	Peak

Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.98	1.29	26.53	30.92	28.66	40.00	11.34	Peak
165.800	16.00	3.22	25.99	36.65	29.88	43.50	13.62	Peak
250.190	18.70	4.02	25.78	39.52	36.46	46.00	9.54	Peak
540.220	24.04	6.97	27.33	29.27	32.95	46.00	13.05	Peak
847.710	26.46	8.41	27.28	29.71	37.30	46.00	8.70	Peak
979.630	27.28	9.07	26.90	28.90	38.35	54.00	15.65	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.98	1.29	0.00	9.33	33.60	40.00	6.40	Peak
46.490	15.75	1.60	26.50	45.44	36.29	40.00	3.71	Peak
125.060	18.55	2.75	26.17	37.50	32.63	43.50	10.87	Peak
286.080	19.12	4.40	25.72	32.81	30.61	46.00	15.39	Peak
612.970	24.82	7.10	27.48	30.44	34.88	46.00	11.12	Peak
971.870	27.25	9.04	26.92	28.70	38.07	54.00	15.93	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Test SKU: SKU #1 (with INPAQ Antenna)

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

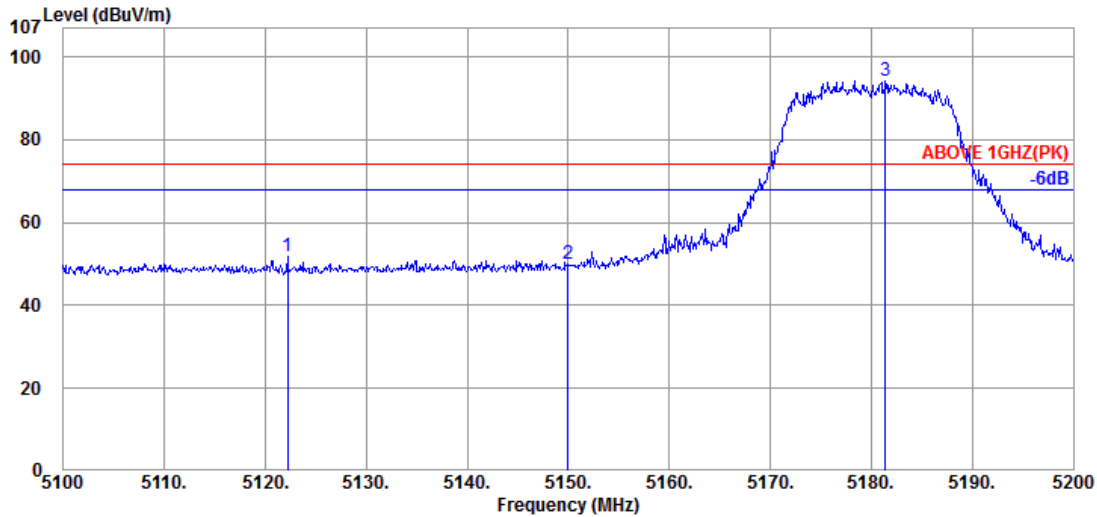

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.200	34.33	10.35	34.39	41.64	51.93	74.00	22.07	Peak
5150.000	34.40	10.36	34.38	39.59	49.97	74.00	24.03	Peak
@ 5181.400	34.47	10.38	34.37	83.86	94.34	---	---	Peak

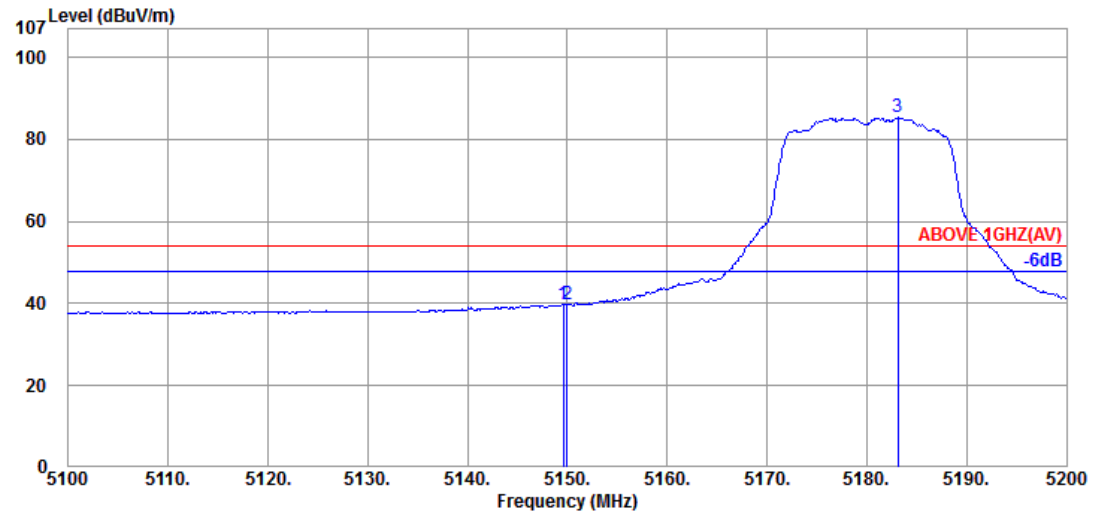


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.40	10.36	34.38	29.32	39.70	54.00	14.30	Average
5150.000	34.40	10.36	34.38	29.28	39.66	54.00	14.34	Average
@ 5183.100	34.47	10.38	34.37	74.81	85.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

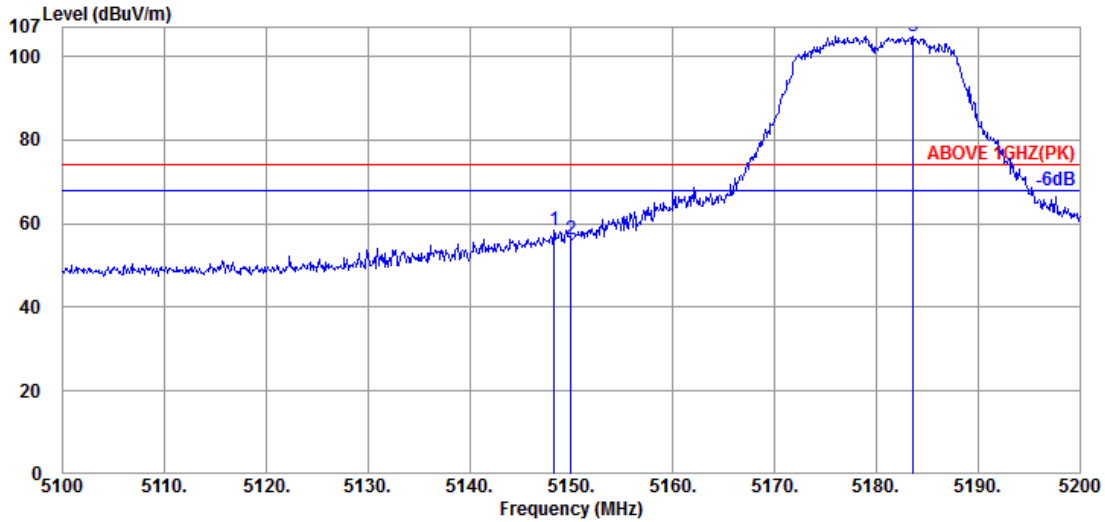

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.40	10.36	34.38	48.00	58.38	74.00	15.62	Peak
5150.000	34.40	10.36	34.38	46.01	56.39	74.00	17.61	Peak
@ 5183.600	34.47	10.38	34.37	94.32	104.80	---	---	Peak

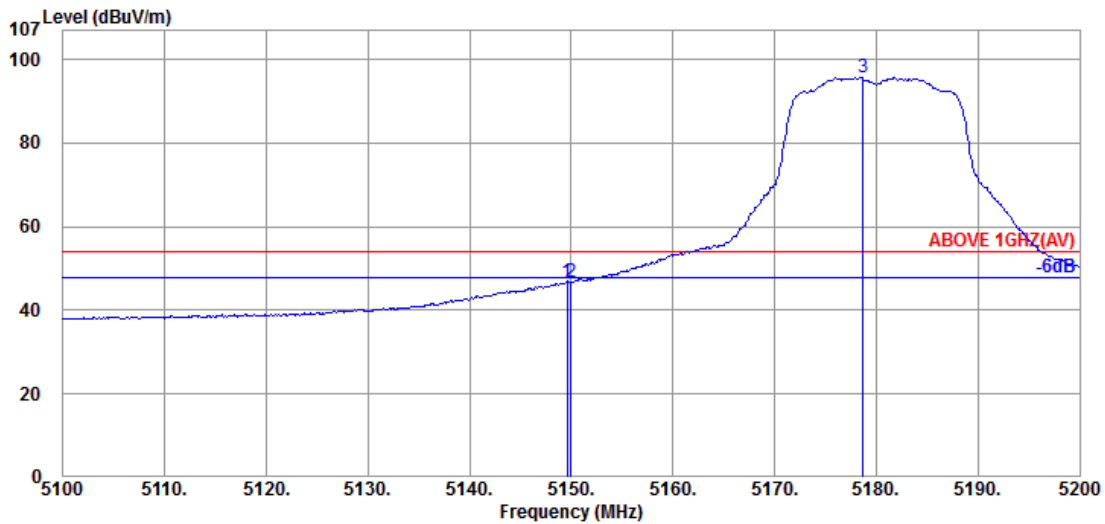


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.40	10.36	34.38	36.32	46.70	54.00	7.30	Average
5150.000	34.40	10.36	34.38	36.25	46.63	54.00	7.37	Average
@ 5178.700	34.47	10.38	34.37	85.16	95.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

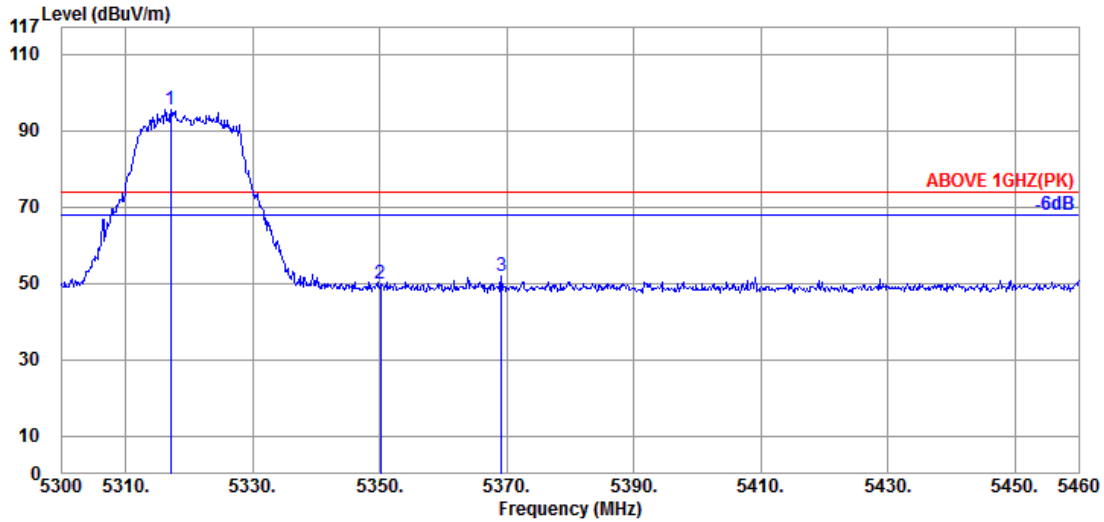

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.60	10.46	34.33	84.77	95.50	---	---	Peak
5350.080	34.60	10.48	34.31	38.96	49.73	74.00	24.27	Peak
5369.120	34.60	10.49	34.31	41.06	51.84	74.00	22.16	Peak

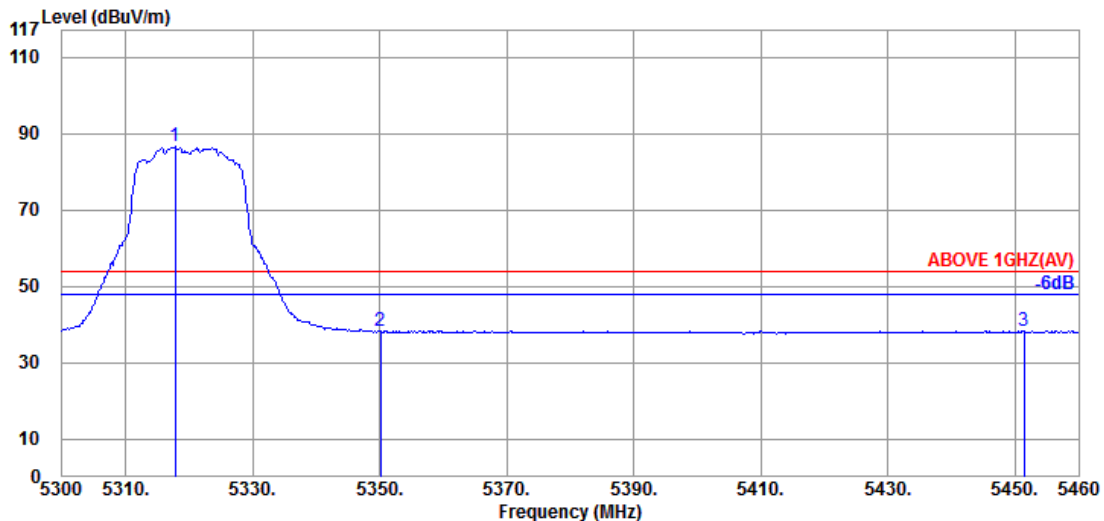


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.760	34.60	10.46	34.33	75.73	86.46	---	---	Average
5350.080	34.60	10.48	34.31	27.43	38.20	54.00	15.80	Average
5451.360	34.70	10.53	34.29	27.41	38.35	54.00	15.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

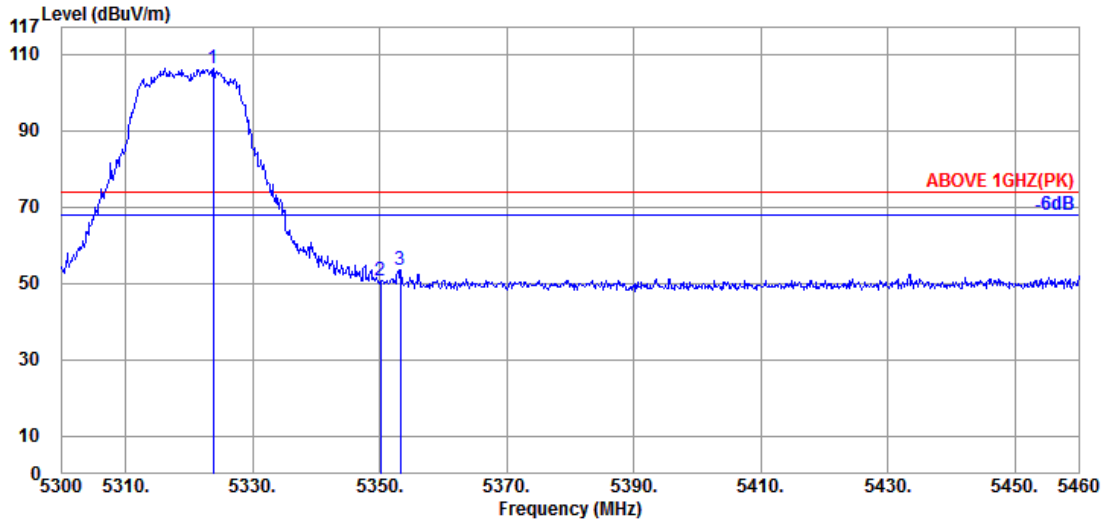

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.60	10.46	34.33	95.51	106.24	---	---	Peak
5350.080	34.60	10.48	34.31	39.94	50.71	74.00	23.29	Peak
5353.280	34.60	10.48	34.31	42.62	53.39	74.00	20.61	Peak

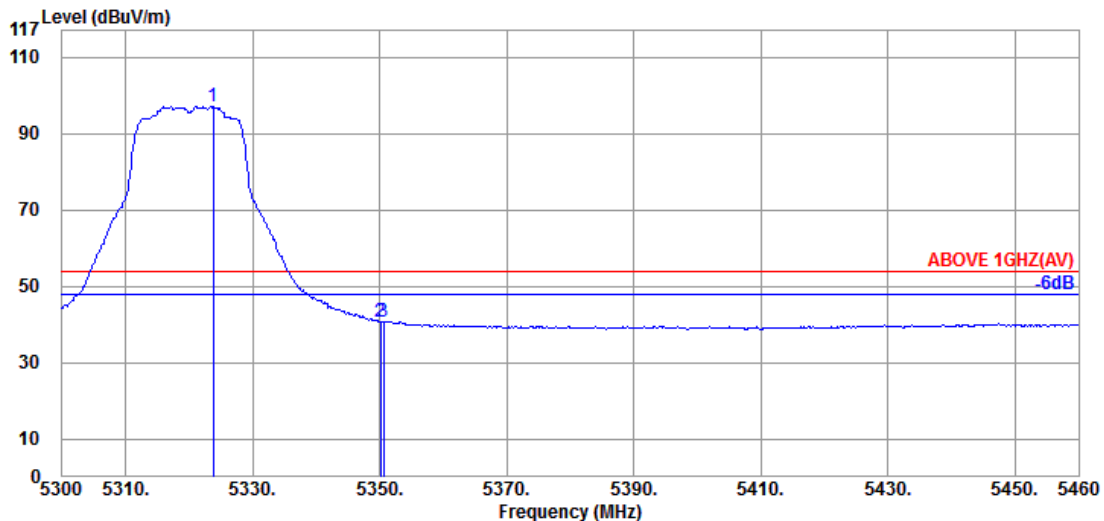


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.60	10.46	34.33	86.22	96.95	---	---	Average
5350.080	34.60	10.48	34.31	30.06	40.83	54.00	13.17	Average
5350.560	34.60	10.48	34.31	30.11	40.88	54.00	13.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

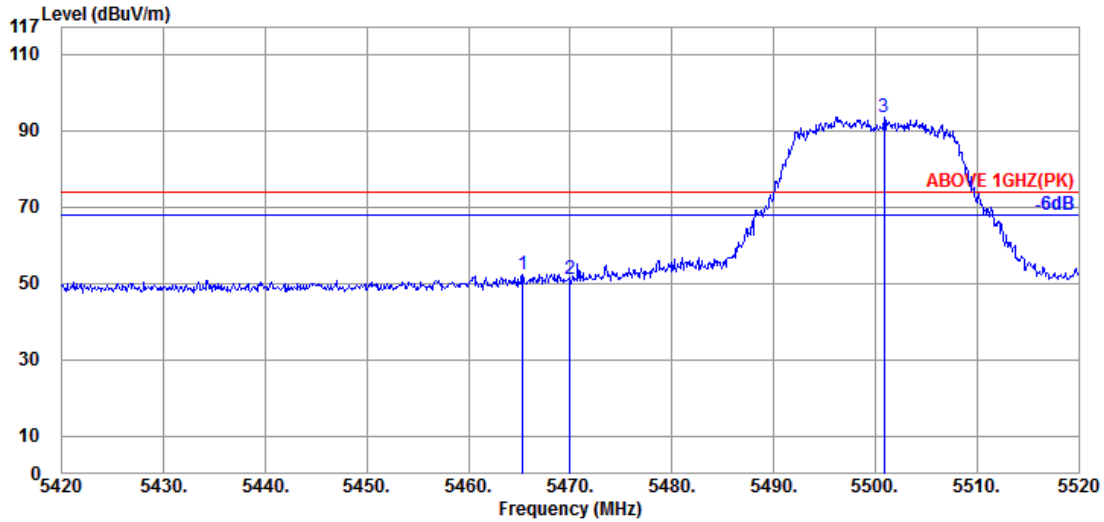

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.67	10.54	34.28	41.49	52.42	74.00	21.58	Peak
5470.000	34.67	10.54	34.28	40.30	51.23	74.00	22.77	Peak
@ 5500.900	34.60	10.56	34.27	82.74	93.63	---	---	Peak

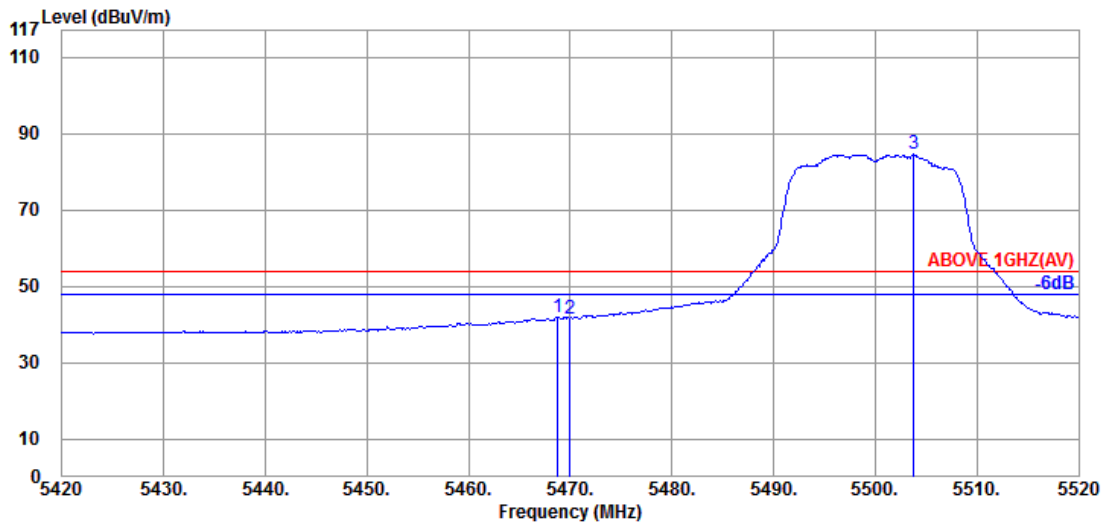


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.67	10.54	34.28	31.05	41.98	54.00	12.02	Average
5470.000	34.67	10.54	34.28	30.75	41.68	54.00	12.32	Average
@ 5503.800	34.60	10.56	34.27	73.70	84.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

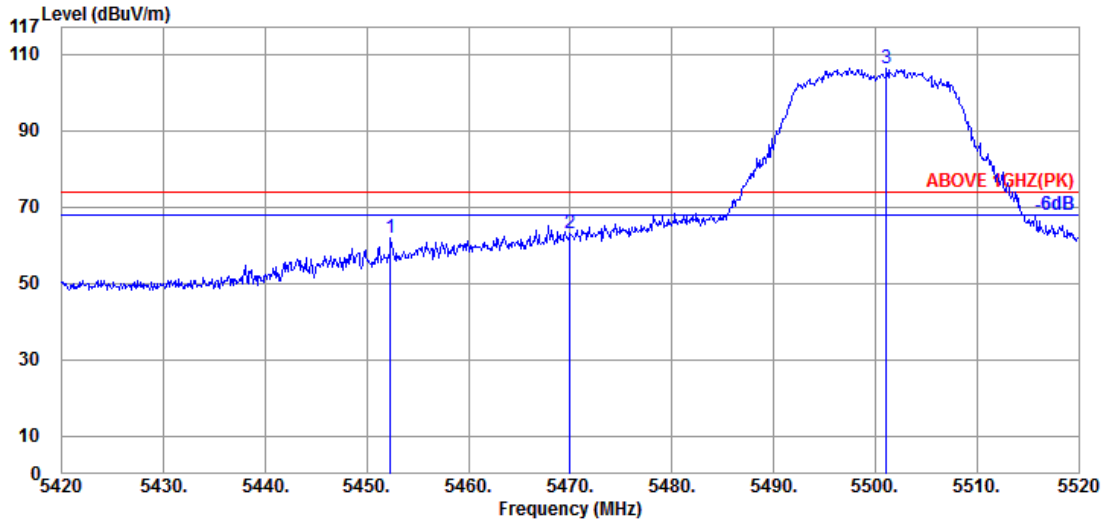

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.300	34.70	10.53	34.28	51.03	61.98	74.00	12.02	Peak
5470.000	34.67	10.54	34.28	52.25	63.18	74.00	10.82	Peak
@ 5501.100	34.60	10.56	34.27	95.43	106.32	---	---	Peak

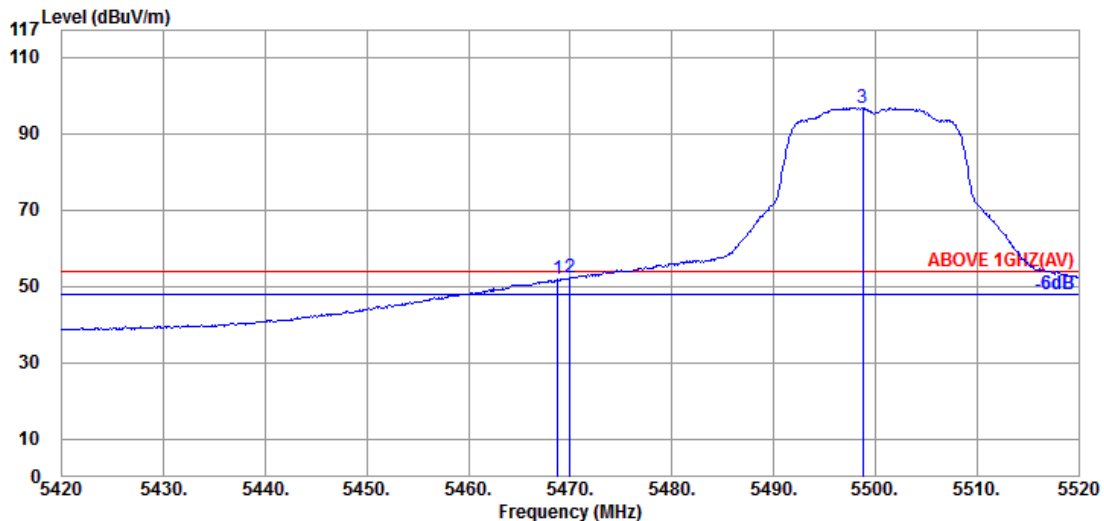


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.67	10.54	34.28	40.87	51.80	54.00	2.20	Average
5470.000	34.67	10.54	34.28	41.43	52.36	54.00	1.64	Average
@ 5498.800	34.60	10.56	34.27	85.94	96.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5700MHz

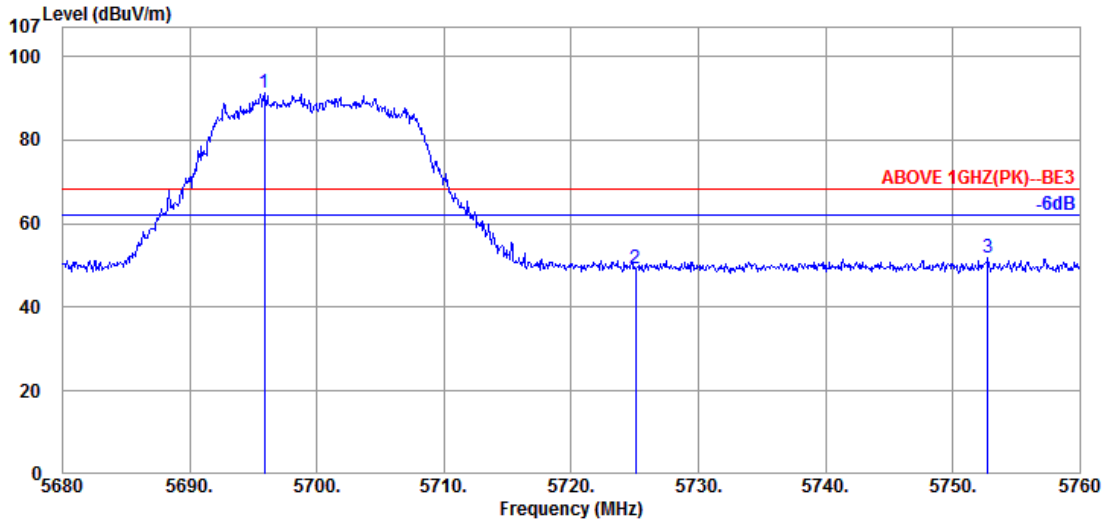

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.840	34.80	10.80	34.36	80.17	91.41	---	---	Peak
5725.040	34.80	10.84	34.37	38.13	49.40	68.20	18.80	Peak
5752.800	34.80	10.89	34.39	40.50	51.80	68.20	16.40	Peak

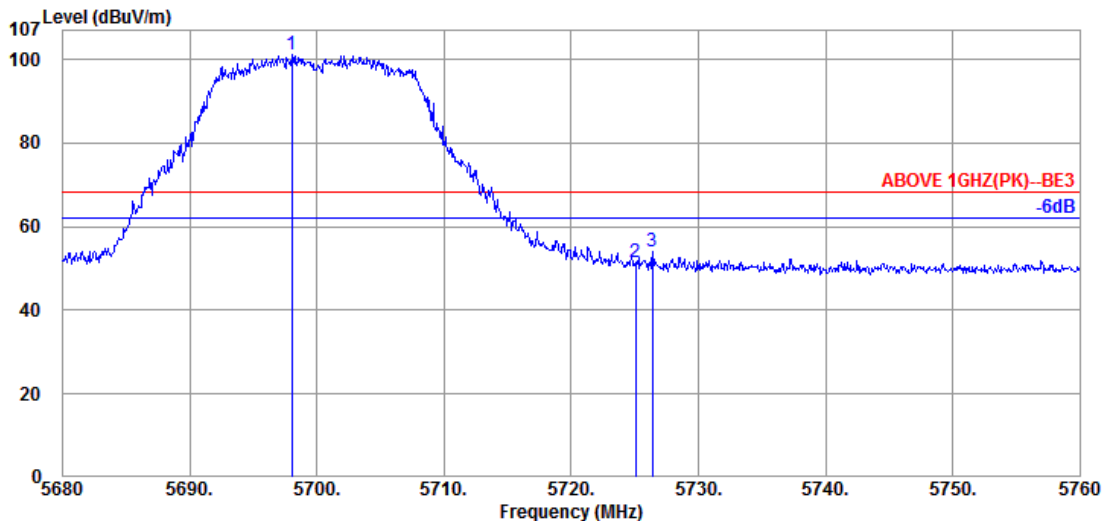


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.000	34.80	10.80	34.36	89.84	101.08	---	---	Peak
5725.040	34.80	10.84	34.37	40.17	51.44	68.20	16.76	Peak
5726.400	34.80	10.84	34.38	42.74	54.00	68.20	14.20	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

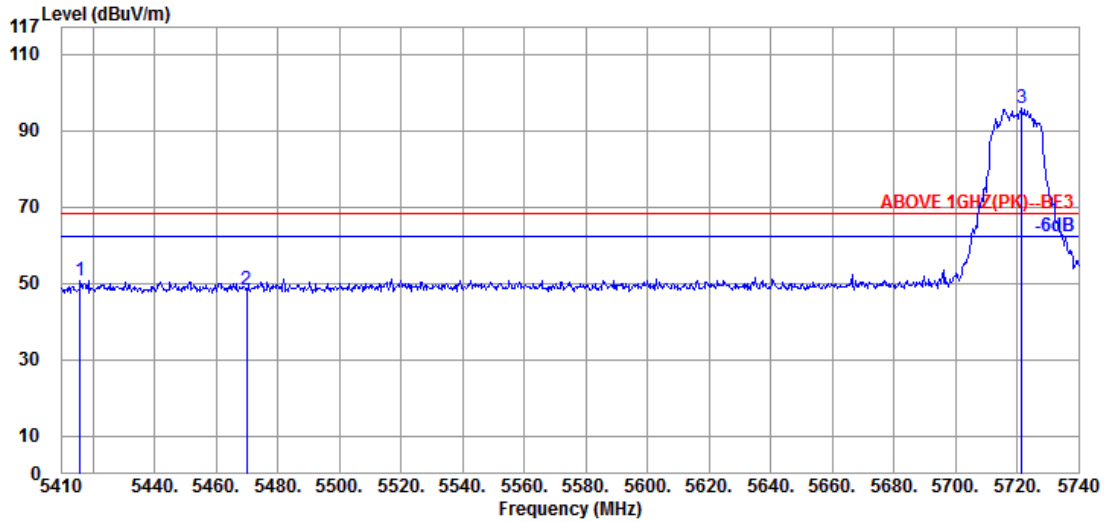

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.940	34.62	10.51	34.30	39.72	50.55	68.20	17.65	Peak
5470.060	34.67	10.54	34.28	37.50	48.43	68.20	19.77	Peak
@ 5721.520	34.80	10.84	34.37	84.74	96.01	---	---	Peak

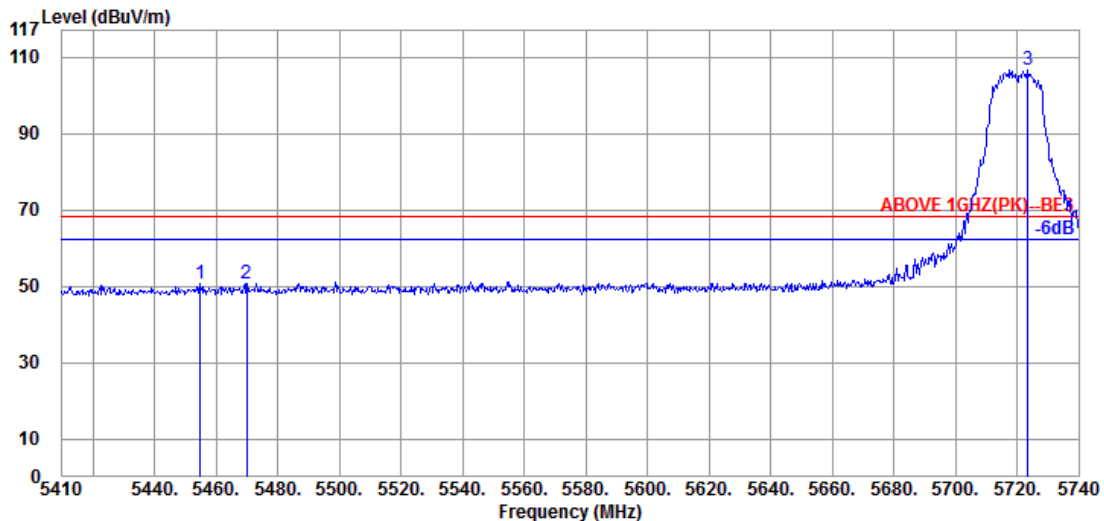


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.880	34.70	10.53	34.28	39.75	50.70	68.20	17.50	Peak
5470.060	34.67	10.54	34.28	39.71	50.64	68.20	17.56	Peak
@ 5723.500	34.80	10.84	34.37	95.47	106.74	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

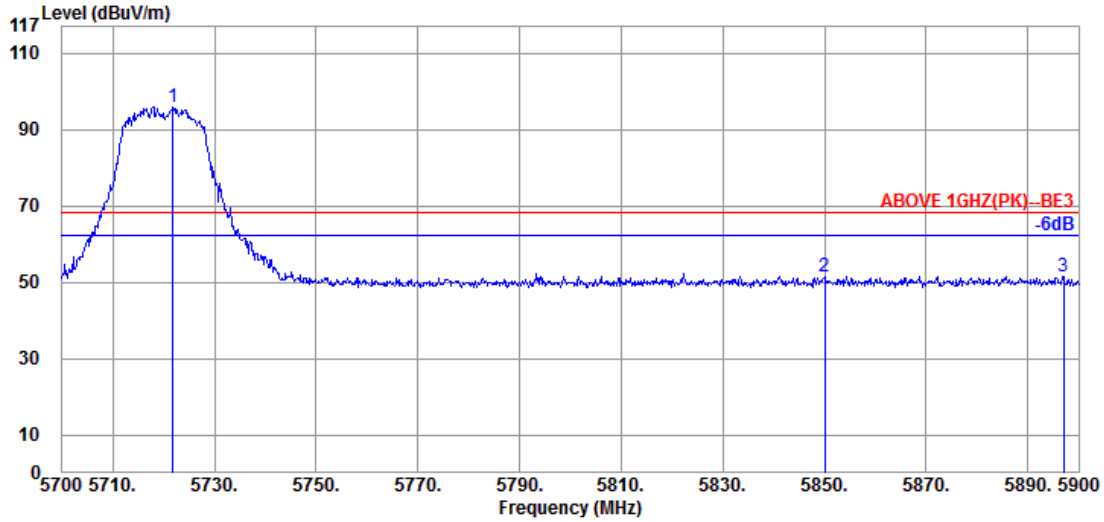

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.800	34.80	10.84	34.37	84.66	95.93	---	---	Peak
5850.000	35.40	10.99	34.43	39.38	51.34	68.20	16.86	Peak
5897.000	35.40	11.06	34.45	39.61	51.62	68.20	16.58	Peak

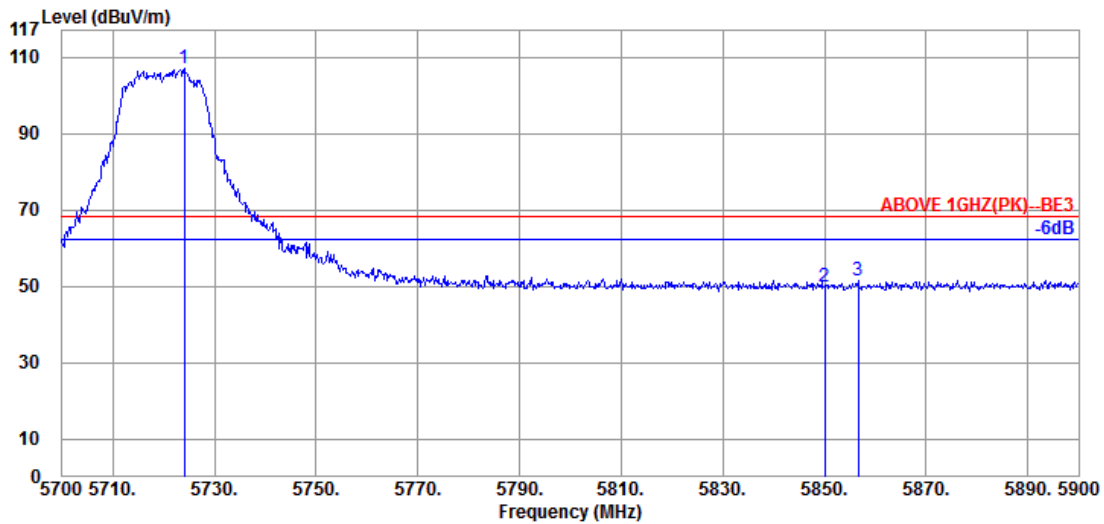


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	34.80	10.84	34.37	95.76	107.03	---	---	Peak
5850.000	35.40	10.99	34.43	37.89	49.85	68.20	18.35	Peak
5856.600	35.40	11.02	34.43	39.70	51.69	68.20	16.51	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

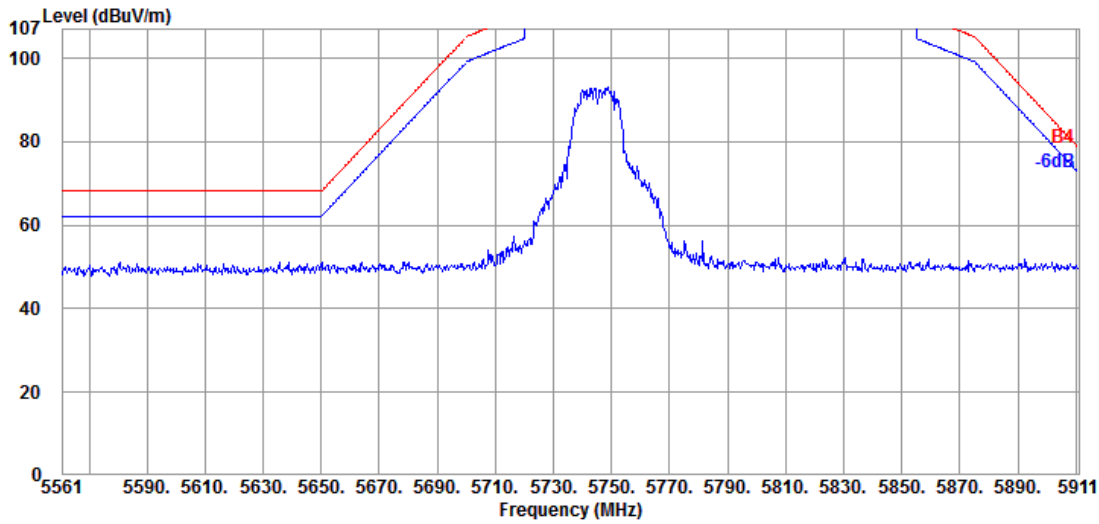


Antenna at Vertical Polarization

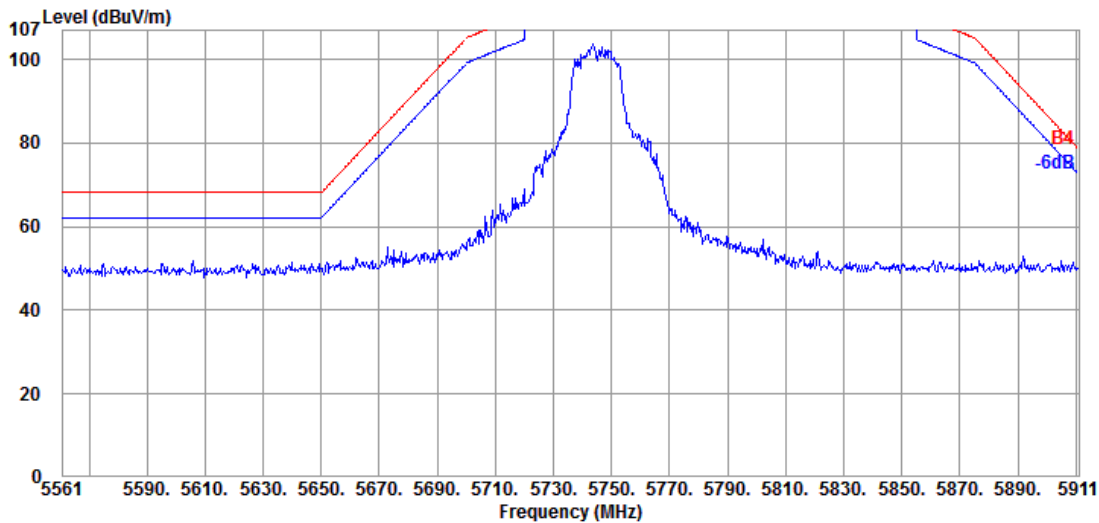


Mode	802.11a	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

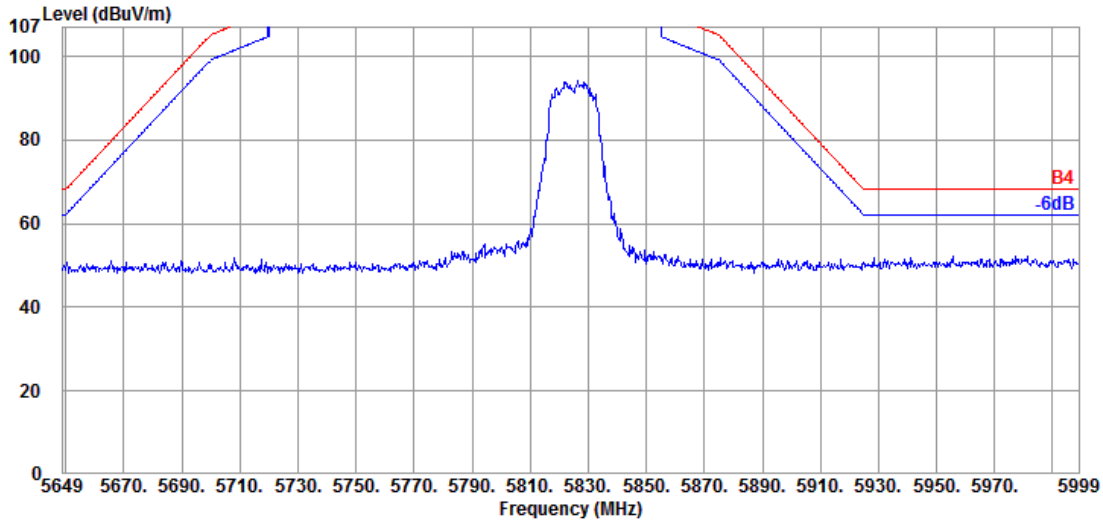

Antenna at Vertical Polarization

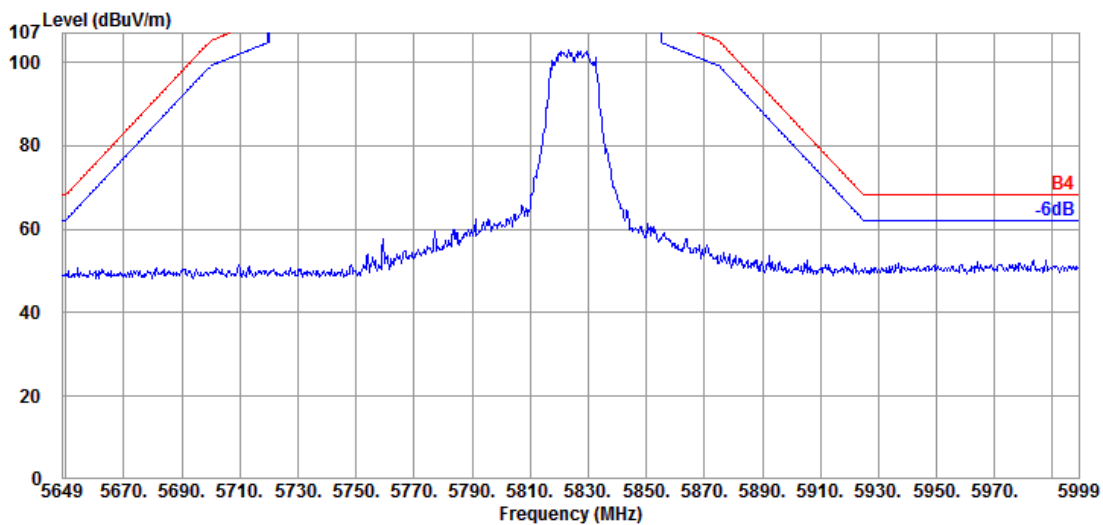


Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

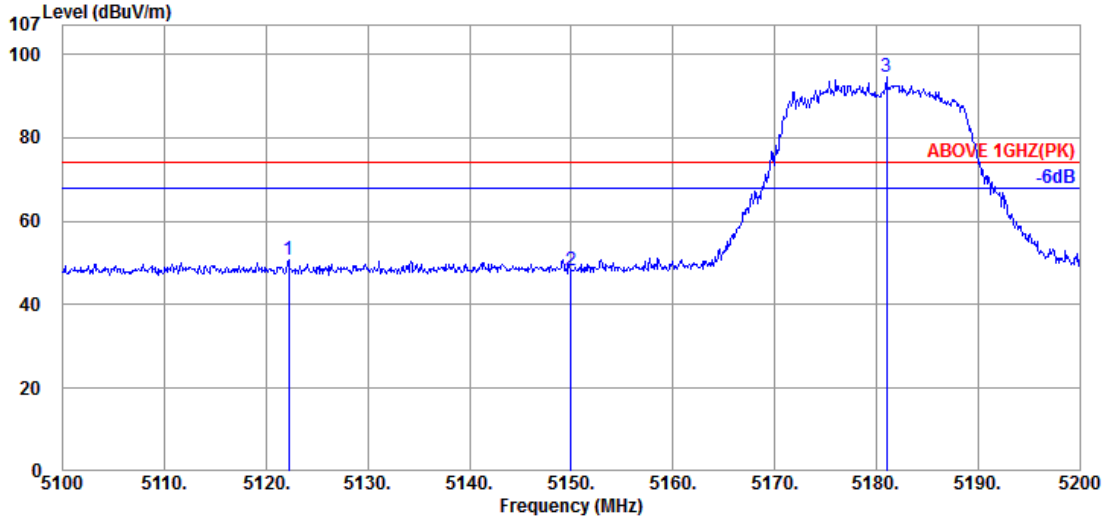

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.200	34.33	10.35	34.39	40.39	50.68	74.00	23.32	Peak
5150.000	34.40	10.36	34.38	37.93	48.31	74.00	25.69	Peak
@ 5181.000	34.47	10.38	34.37	83.95	94.43	---	---	Peak

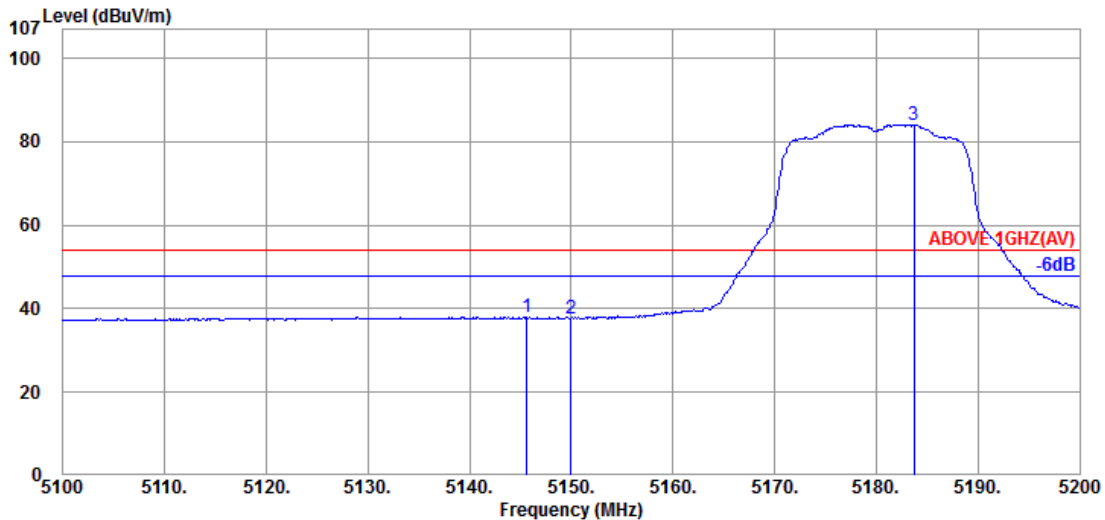


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	34.40	10.36	34.38	27.60	37.98	54.00	16.02	Average
5150.000	34.40	10.36	34.38	27.33	37.71	54.00	16.29	Average
@ 5183.700	34.47	10.38	34.37	73.66	84.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

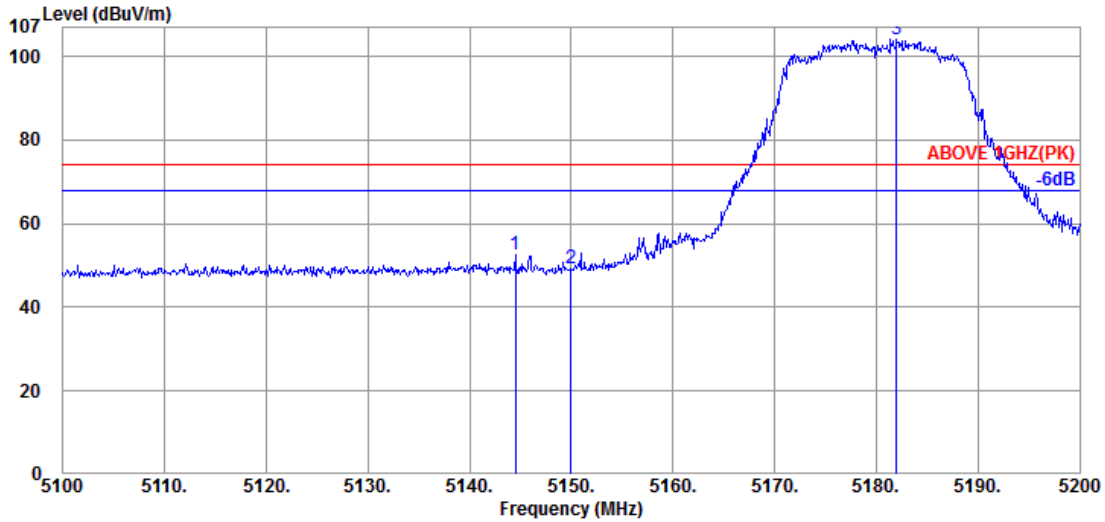

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.500	34.40	10.36	34.38	42.33	52.71	74.00	21.29	Peak
5150.000	34.40	10.36	34.38	39.03	49.41	74.00	24.59	Peak
@ 5182.000	34.47	10.38	34.37	93.65	104.13	---	---	Peak

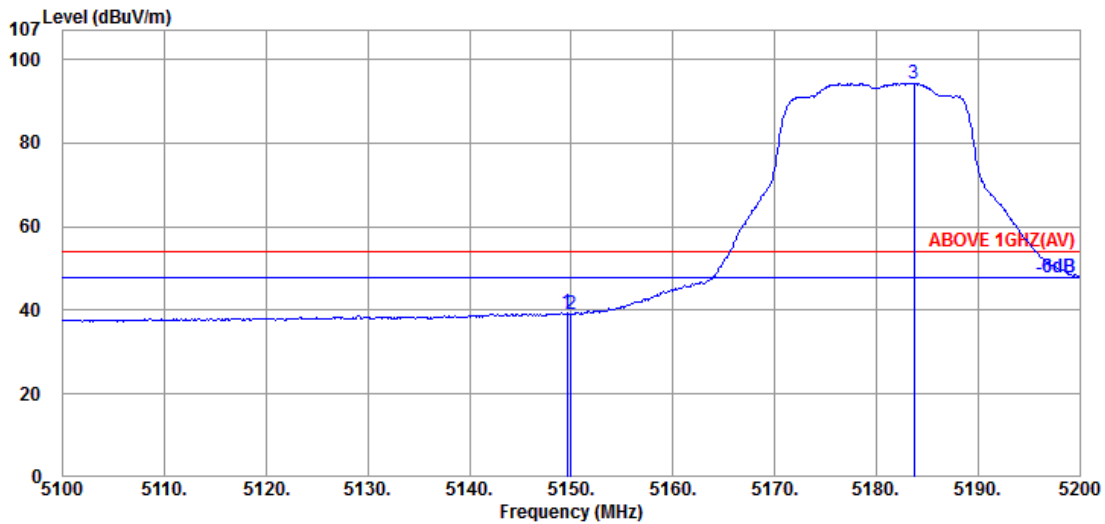


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.40	10.36	34.38	29.02	39.40	54.00	14.60	Average
5150.000	34.40	10.36	34.38	28.77	39.15	54.00	14.85	Average
@ 5183.700	34.47	10.38	34.37	83.76	94.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

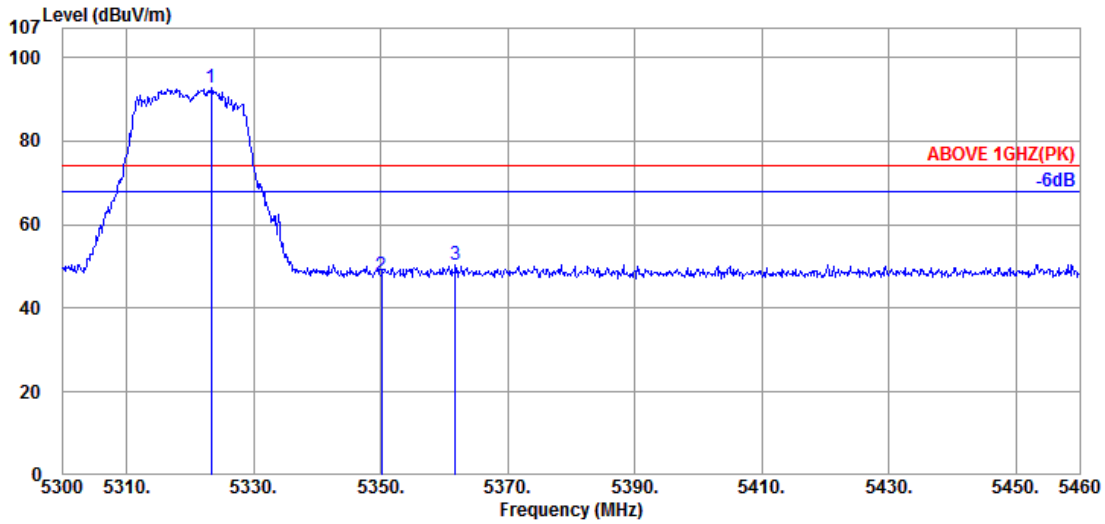

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	34.60	10.46	34.33	82.14	92.87	---	---	Peak
5350.080	34.60	10.48	34.31	37.25	48.02	74.00	25.98	Peak
5361.760	34.60	10.49	34.31	39.70	50.48	74.00	23.52	Peak

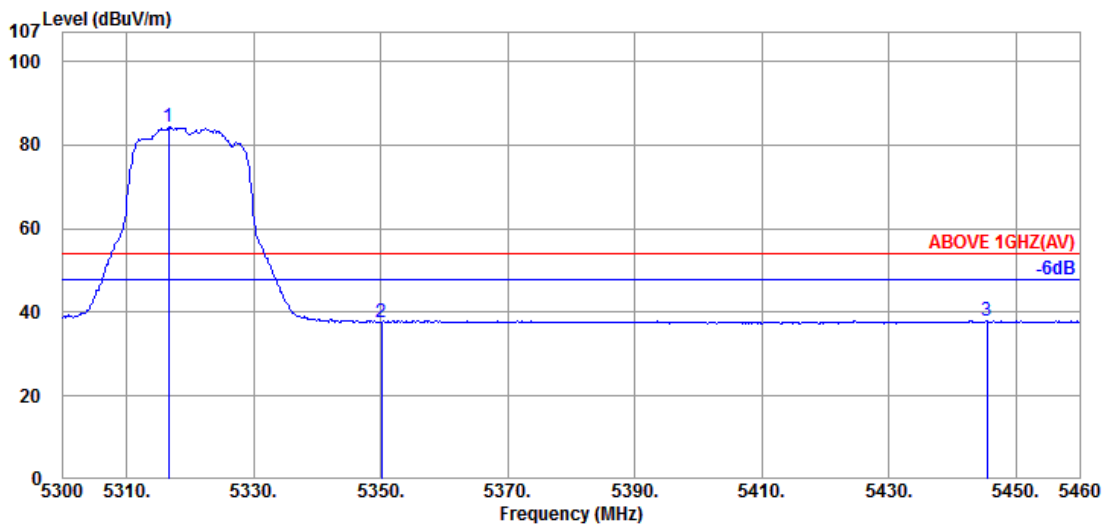


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	34.60	10.46	34.33	73.66	84.39	---	---	Average
5350.080	34.60	10.48	34.31	26.94	37.71	54.00	16.29	Average
5445.440	34.67	10.52	34.29	27.09	37.99	54.00	16.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

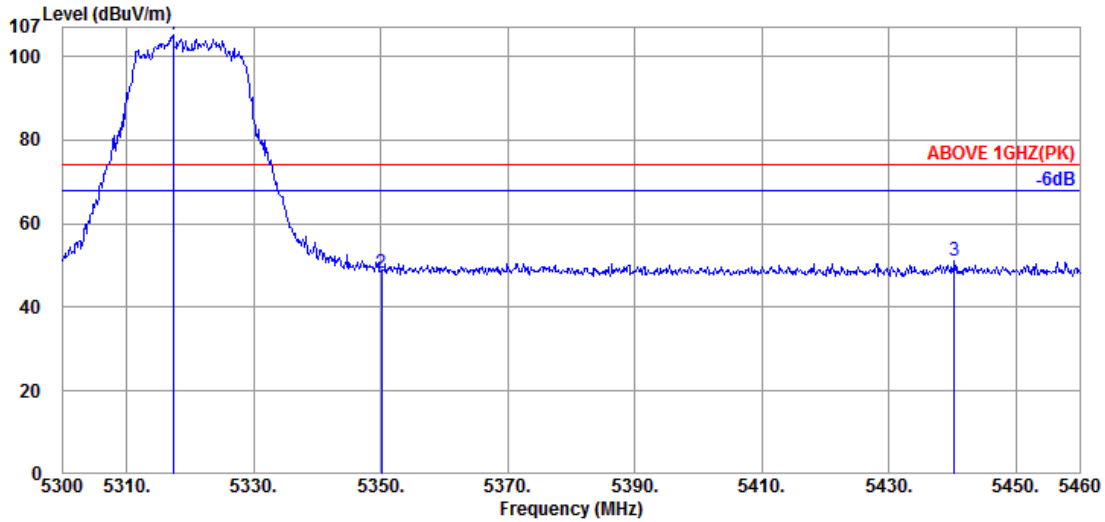

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.280	34.60	10.46	34.33	94.29	105.02	---	---	Peak
5350.080	34.60	10.48	34.31	37.49	48.26	74.00	25.74	Peak
5440.320	34.67	10.52	34.29	40.17	51.07	74.00	22.93	Peak

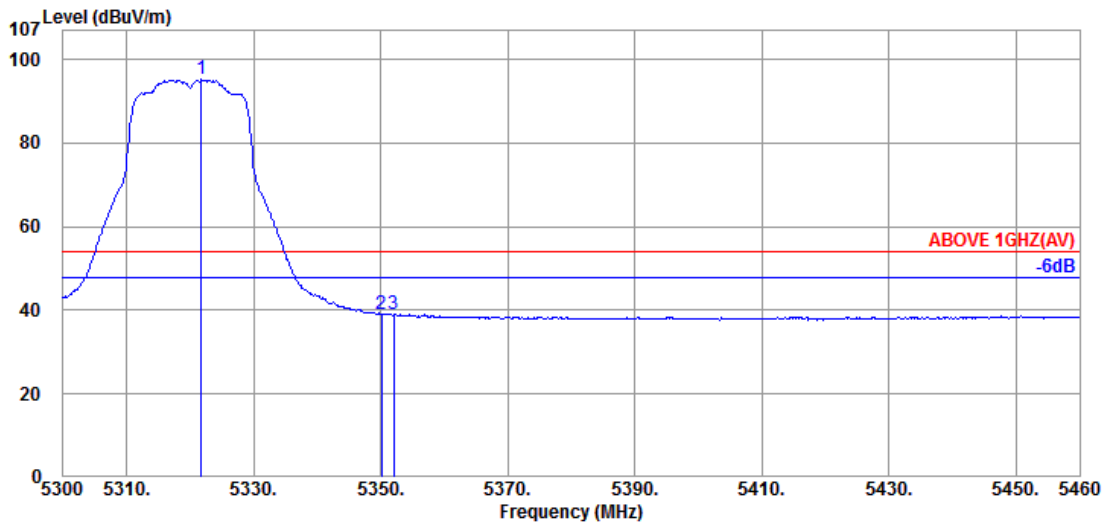


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.760	34.60	10.46	34.33	84.46	95.19	---	---	Average
5350.080	34.60	10.48	34.31	28.35	39.12	54.00	14.88	Average
5352.000	34.60	10.48	34.31	28.38	39.15	54.00	14.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

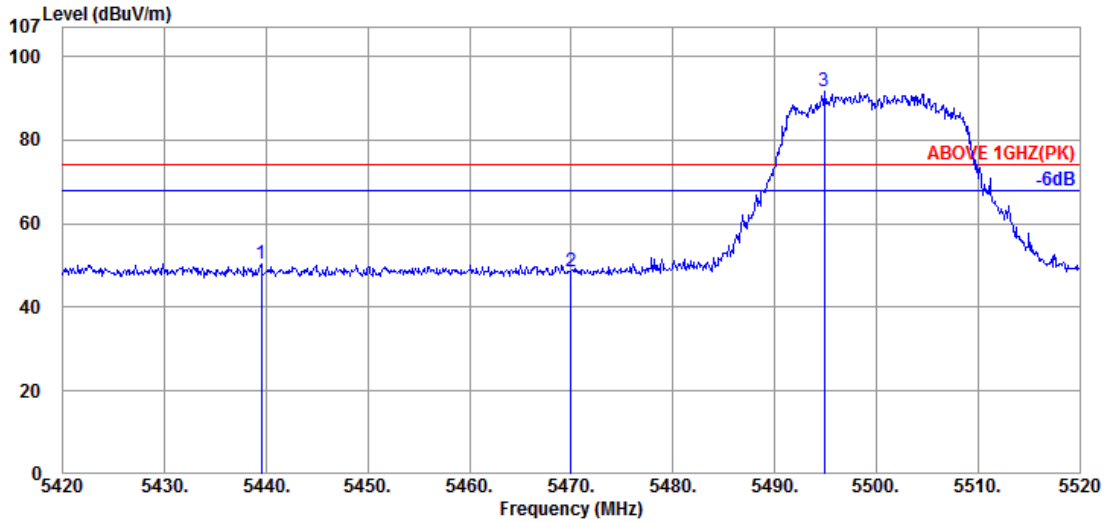

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.500	34.67	10.52	34.29	39.38	50.28	74.00	23.72	Peak
5470.000	34.67	10.54	34.28	37.49	48.42	74.00	25.58	Peak
@ 5494.900	34.63	10.55	34.27	80.73	91.64	---	---	Peak

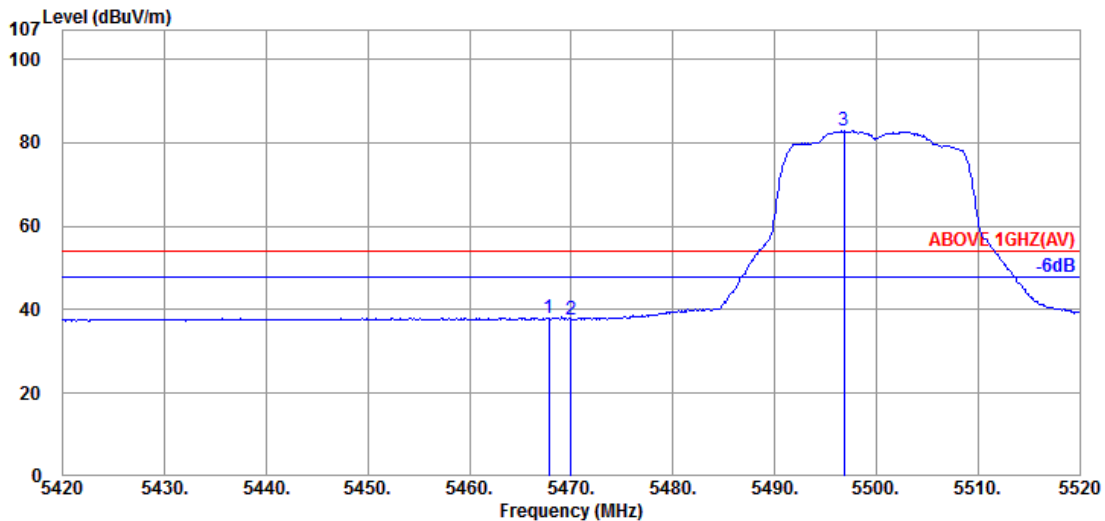


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.67	10.54	34.28	27.07	38.00	54.00	16.00	Average
5470.000	34.67	10.54	34.28	26.76	37.69	54.00	16.31	Average
@ 5496.800	34.60	10.56	34.27	71.96	82.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

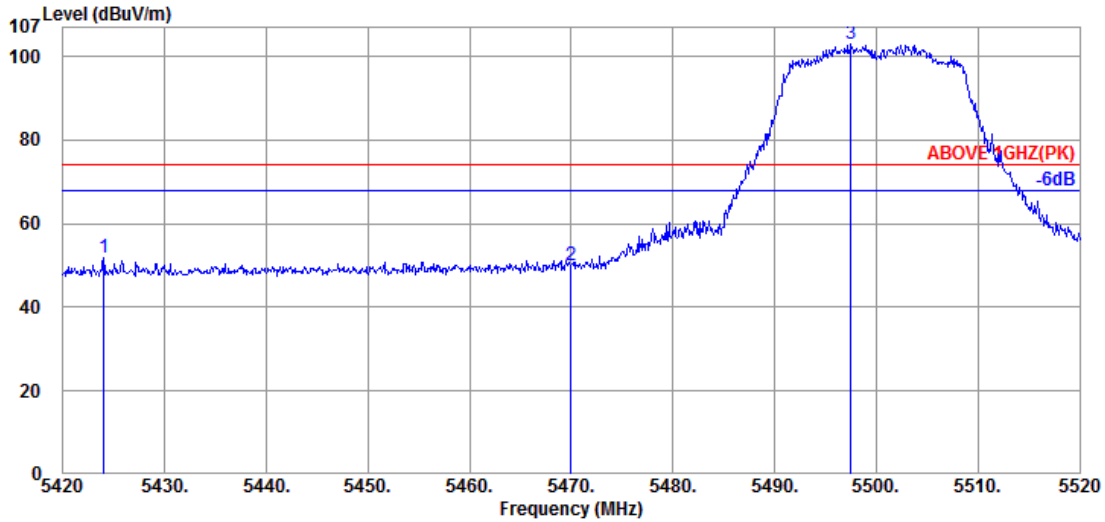

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.000	34.65	10.51	34.29	40.91	51.78	74.00	22.22	Peak
5470.000	34.67	10.54	34.28	39.03	49.96	74.00	24.04	Peak
@ 5497.500	34.60	10.56	34.27	91.92	102.81	---	---	Peak

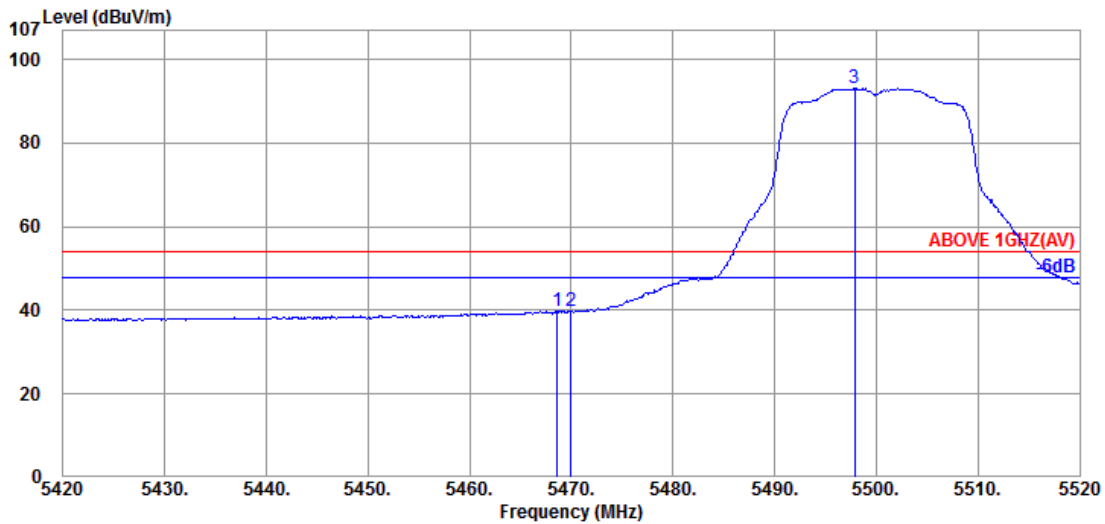


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.67	10.54	34.28	28.80	39.73	54.00	14.27	Average
5470.000	34.67	10.54	34.28	28.77	39.70	54.00	14.30	Average
@ 5497.900	34.60	10.56	34.27	82.28	93.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5700MHz

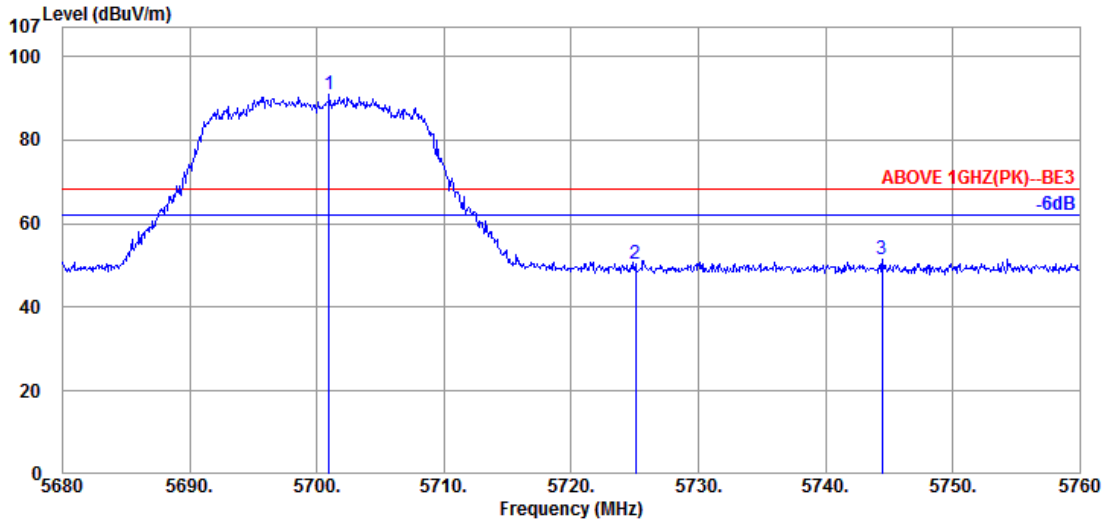

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.960	34.80	10.82	34.36	79.64	90.90	---	---	Peak
5725.040	34.80	10.84	34.37	39.18	50.45	68.20	17.75	Peak
5744.480	34.80	10.86	34.38	40.39	51.67	68.20	16.53	Peak

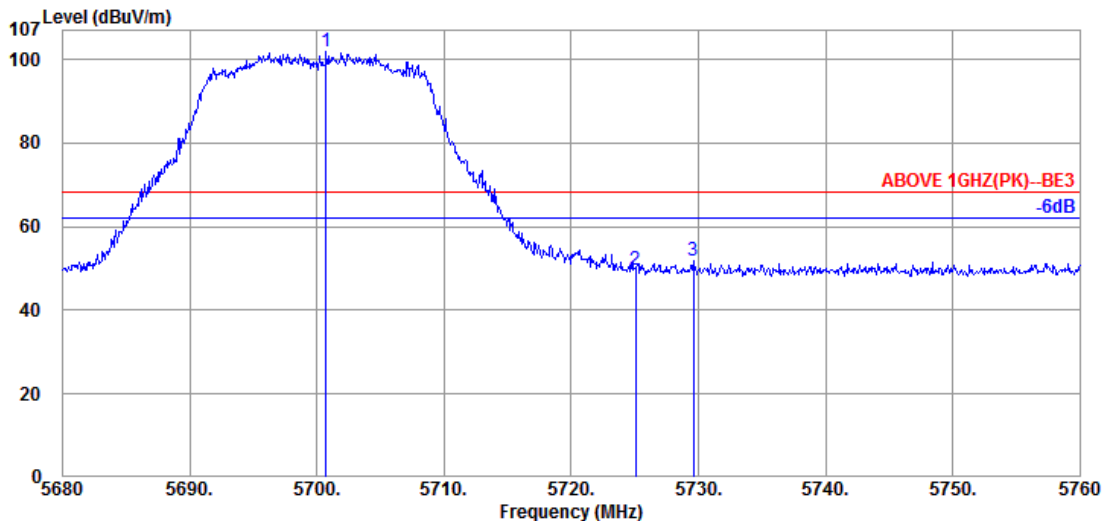


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.720	34.80	10.82	34.36	90.51	101.77	---	---	Peak
5725.040	34.80	10.84	34.37	38.50	49.77	68.20	18.43	Peak
5729.600	34.80	10.84	34.38	40.69	51.95	68.20	16.25	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

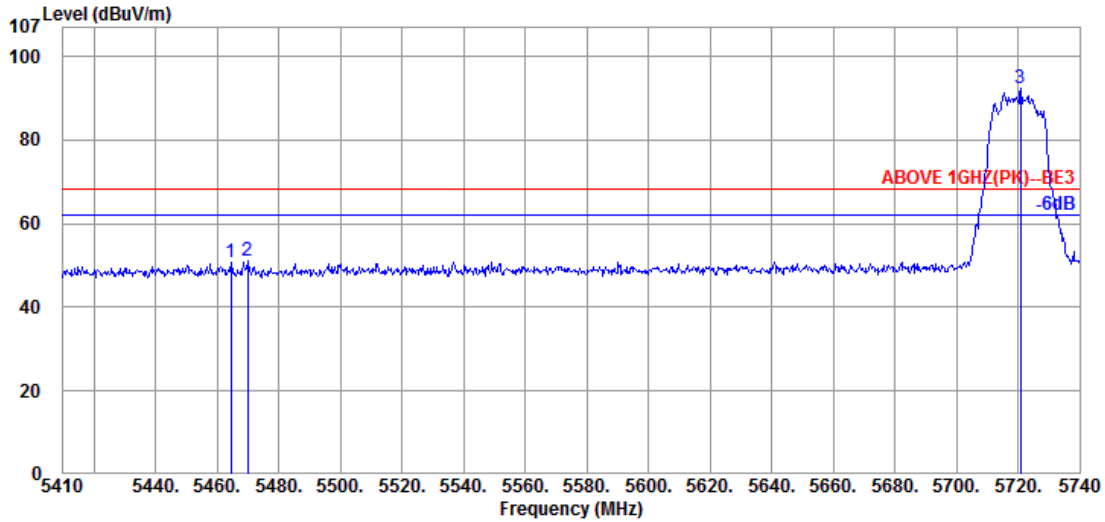

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.67	10.54	34.28	39.87	50.80	68.20	17.40	Peak
5470.060	34.67	10.54	34.28	40.17	51.10	68.20	17.10	Peak
@ 5720.860	34.80	10.84	34.37	80.98	92.25	---	---	Peak

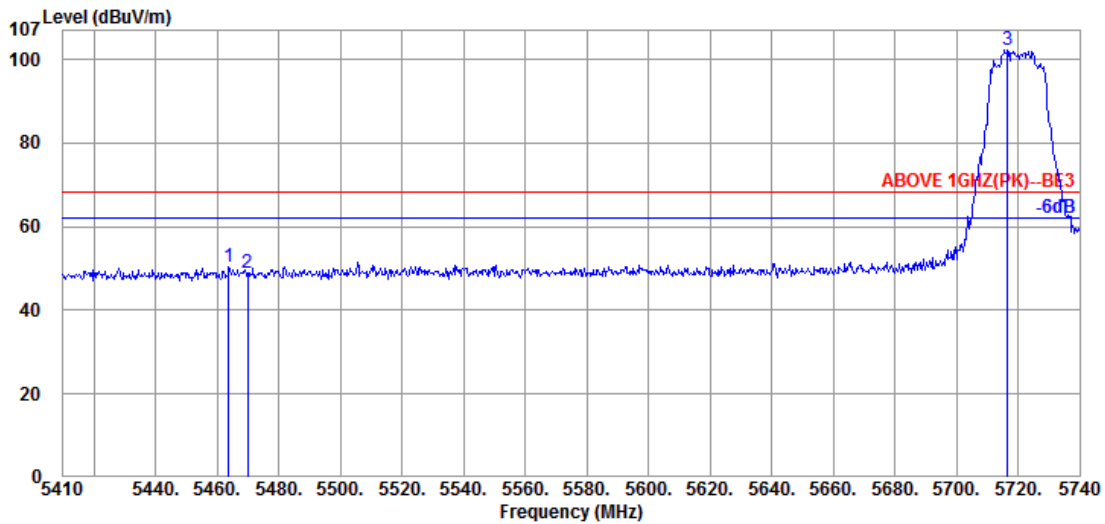


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	34.67	10.54	34.28	39.51	50.44	68.20	17.76	Peak
5470.060	34.67	10.54	34.28	38.03	48.96	68.20	19.24	Peak
@ 5716.570	34.80	10.82	34.37	90.84	102.09	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

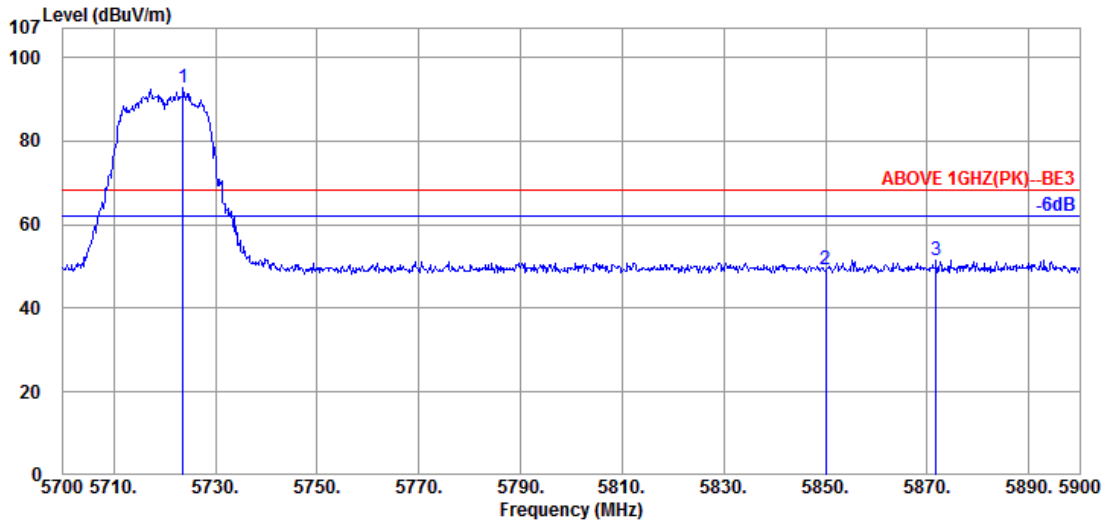

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.600	34.80	10.84	34.37	81.59	92.86	---	---	Peak
5850.000	35.40	10.99	34.43	37.40	49.36	68.20	18.84	Peak
5871.800	35.40	11.04	34.44	39.43	51.43	68.20	16.77	Peak

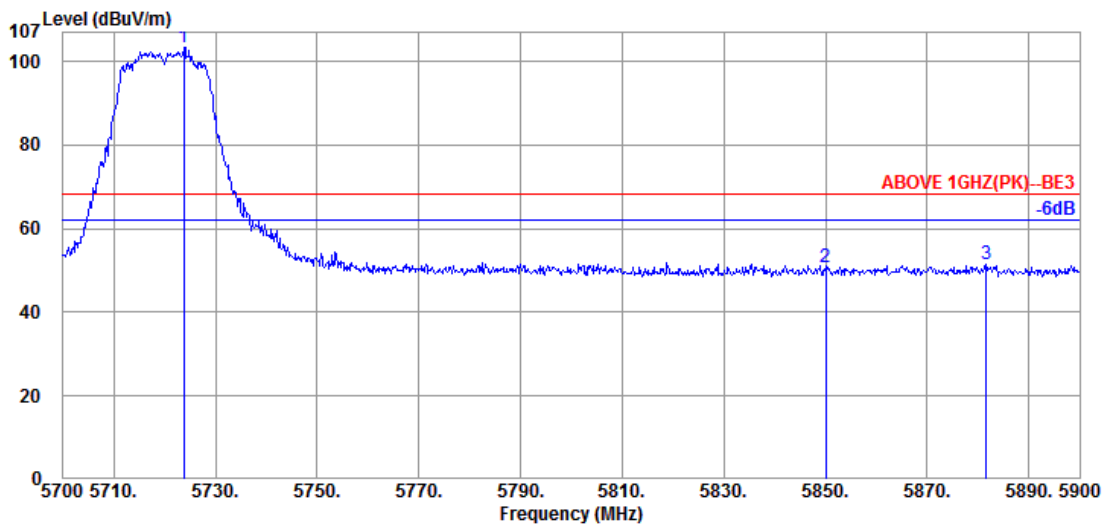


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.800	34.80	10.84	34.37	92.07	103.34	---	---	Peak
5850.000	35.40	10.99	34.43	38.91	50.87	68.20	17.33	Peak
5881.600	35.40	11.04	34.45	39.51	51.50	68.20	16.70	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

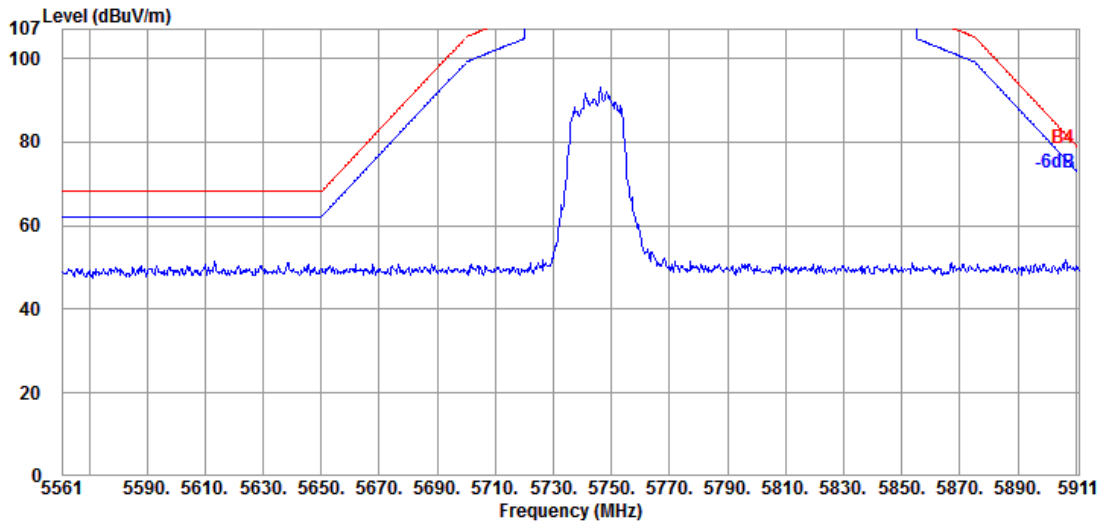


Antenna at Vertical Polarization

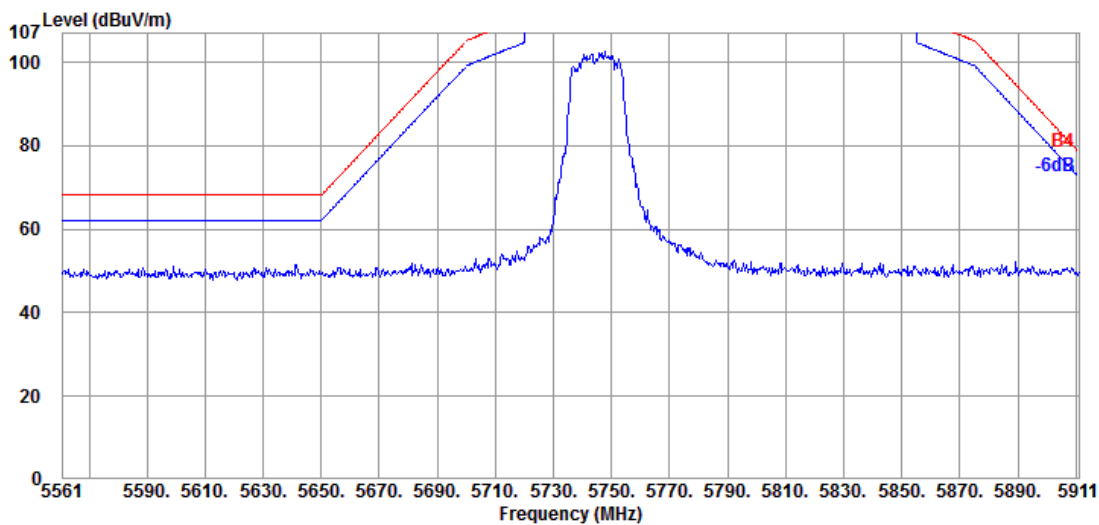


Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

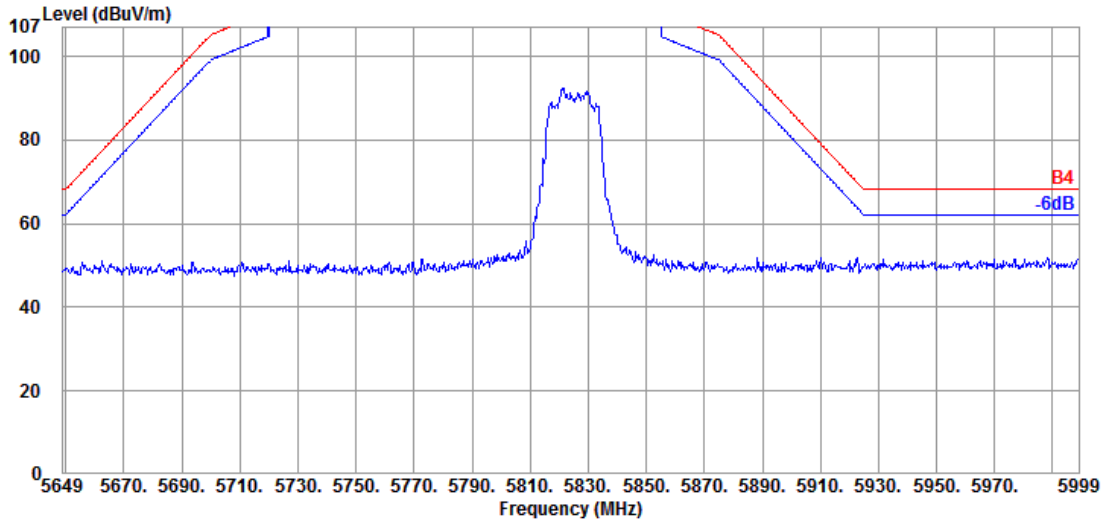

Antenna at Vertical Polarization

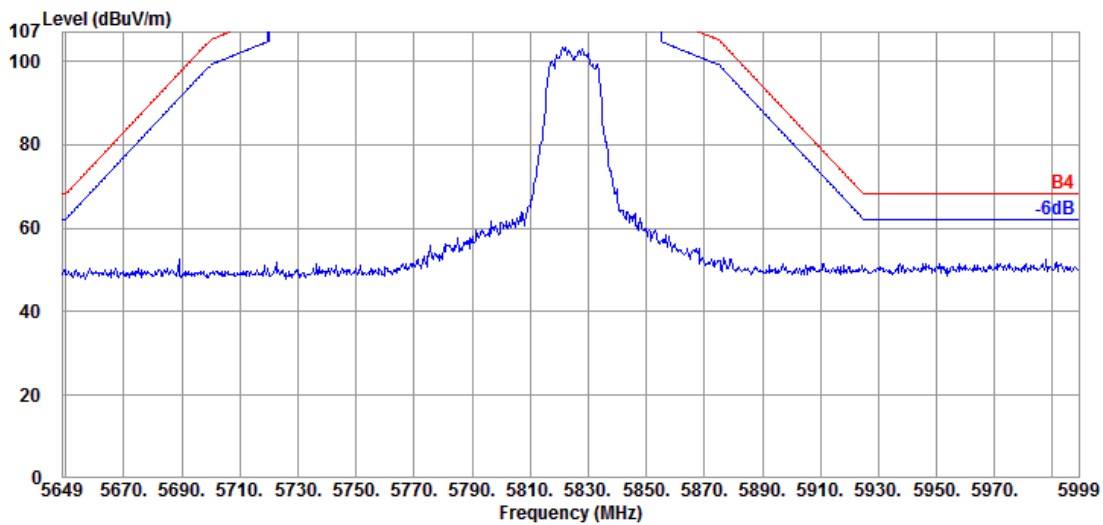


Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

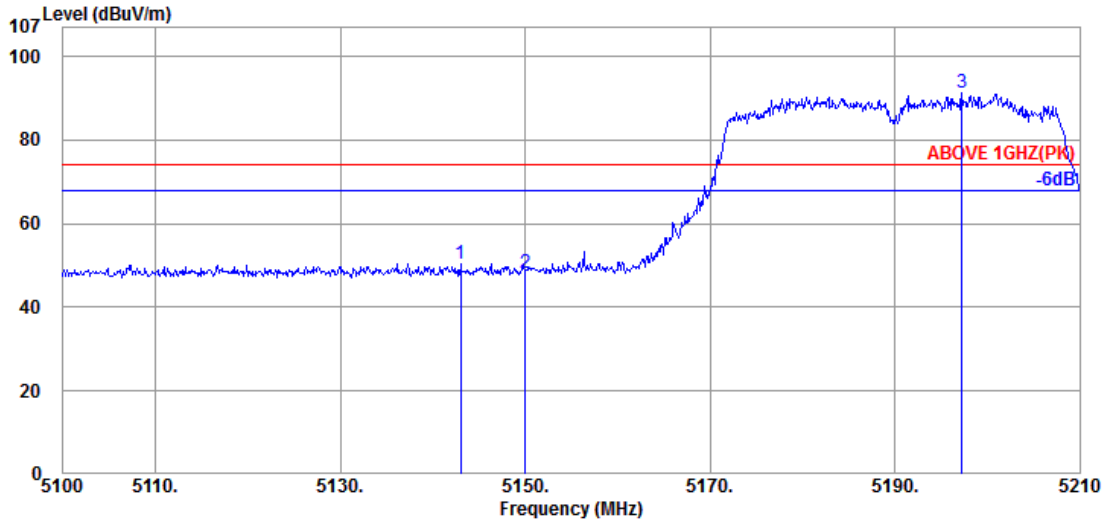

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.010	34.40	10.36	34.38	40.12	50.50	74.00	23.50	Peak
5150.050	34.40	10.36	34.38	37.87	48.25	74.00	25.75	Peak
@ 5197.240	34.50	10.39	34.36	80.70	91.23	---	---	Peak

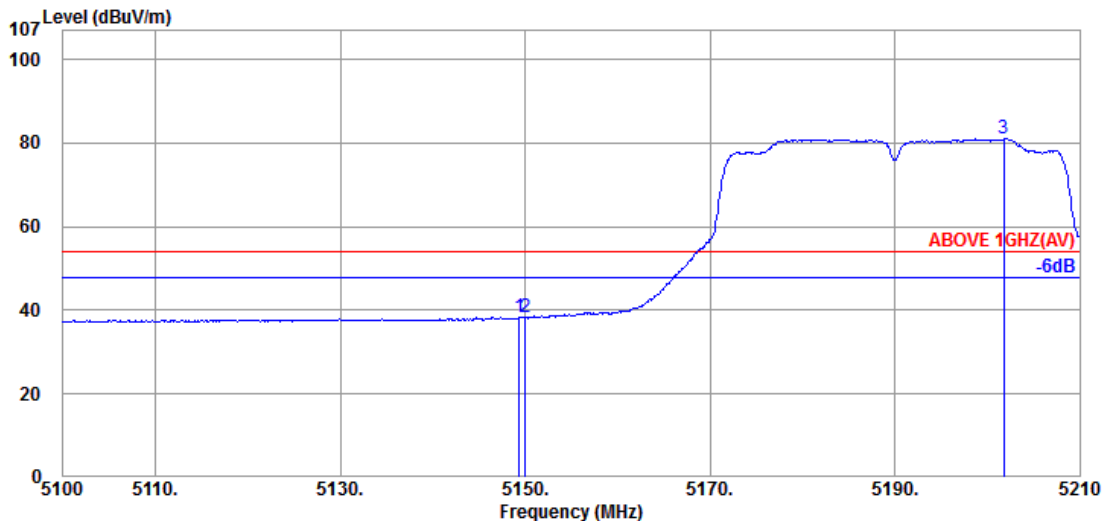


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.40	10.36	34.38	28.04	38.42	54.00	15.58	Average
5150.050	34.40	10.36	34.38	27.88	38.26	54.00	15.74	Average
@ 5201.750	34.50	10.39	34.36	70.59	81.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

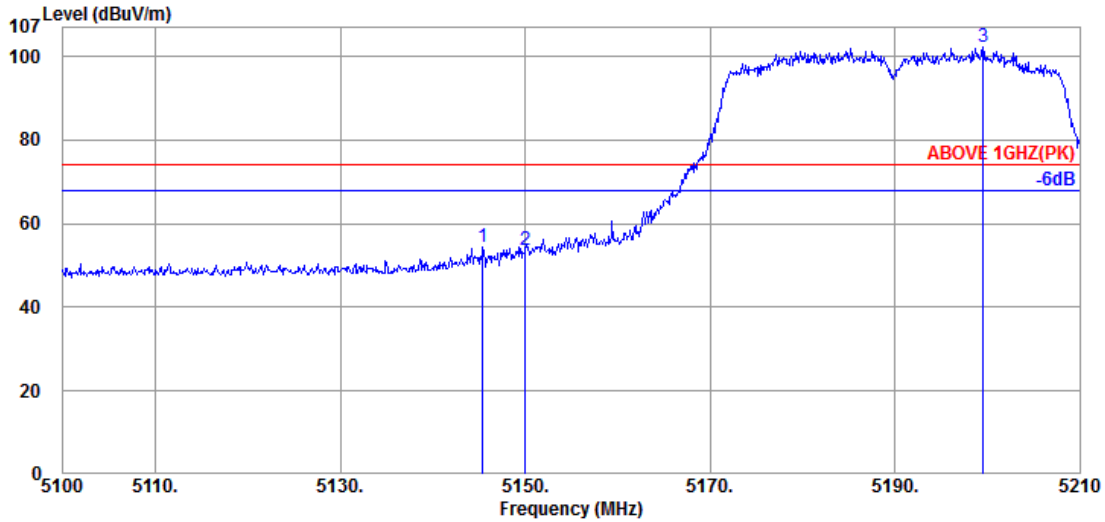

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.430	34.40	10.36	34.38	44.04	54.42	74.00	19.58	Peak
5150.050	34.40	10.36	34.38	43.21	53.59	74.00	20.41	Peak
@ 5199.550	34.50	10.39	34.36	91.59	102.12	---	---	Peak

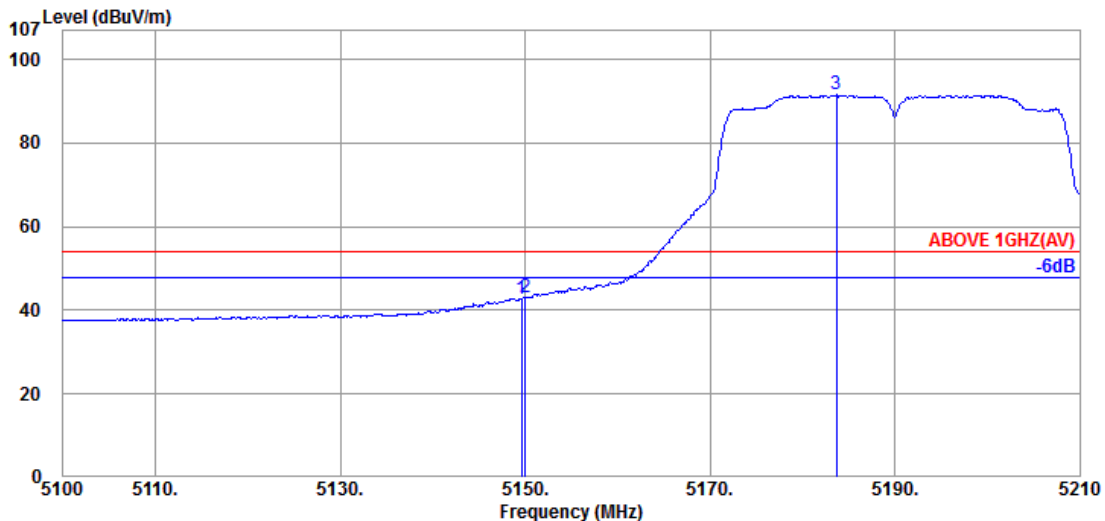


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.40	10.36	34.38	32.51	42.89	54.00	11.11	Average
5150.050	34.40	10.36	34.38	32.62	43.00	54.00	11.00	Average
@ 5183.710	34.47	10.38	34.37	81.03	91.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

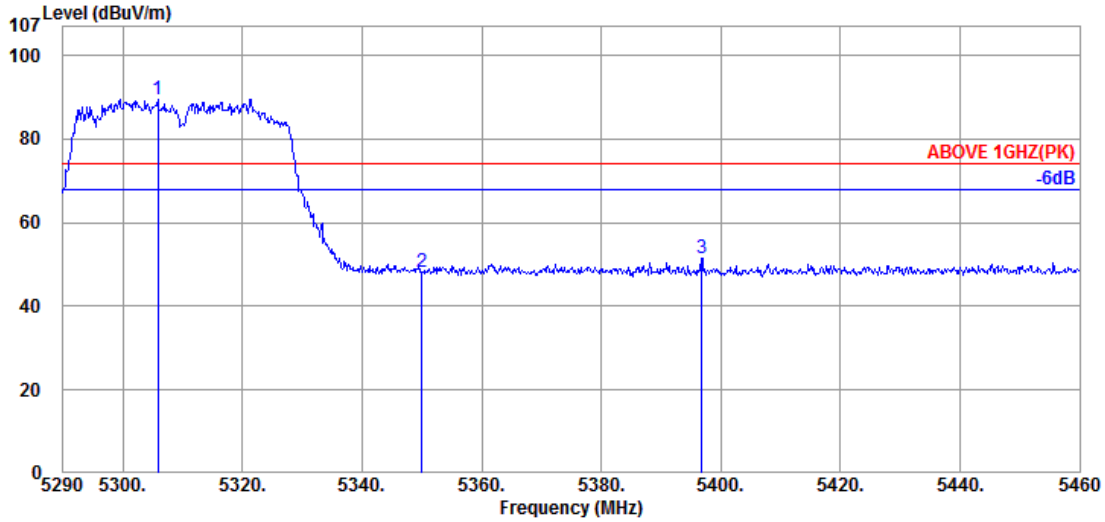

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.810	34.60	10.45	34.33	78.85	89.57	---	---	Peak
5350.010	34.60	10.48	34.31	37.47	48.24	74.00	25.76	Peak
5396.760	34.60	10.50	34.30	40.67	51.47	74.00	22.53	Peak

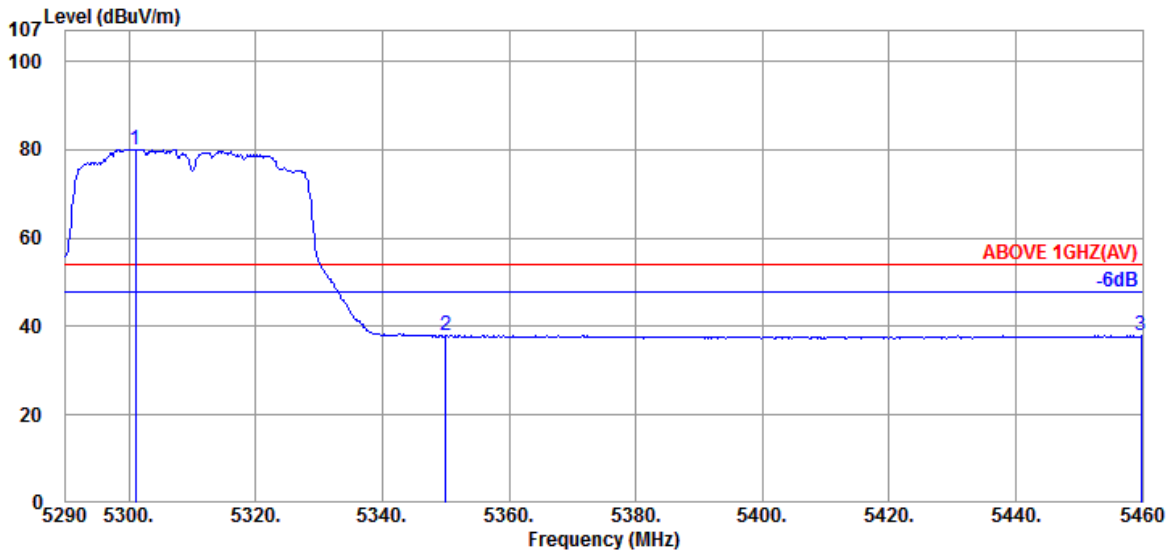


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.050	34.60	10.45	34.33	69.41	80.13	---	---	Average
5350.010	34.60	10.48	34.31	27.03	37.80	54.00	16.20	Average
5459.830	34.70	10.53	34.28	27.20	38.15	54.00	15.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

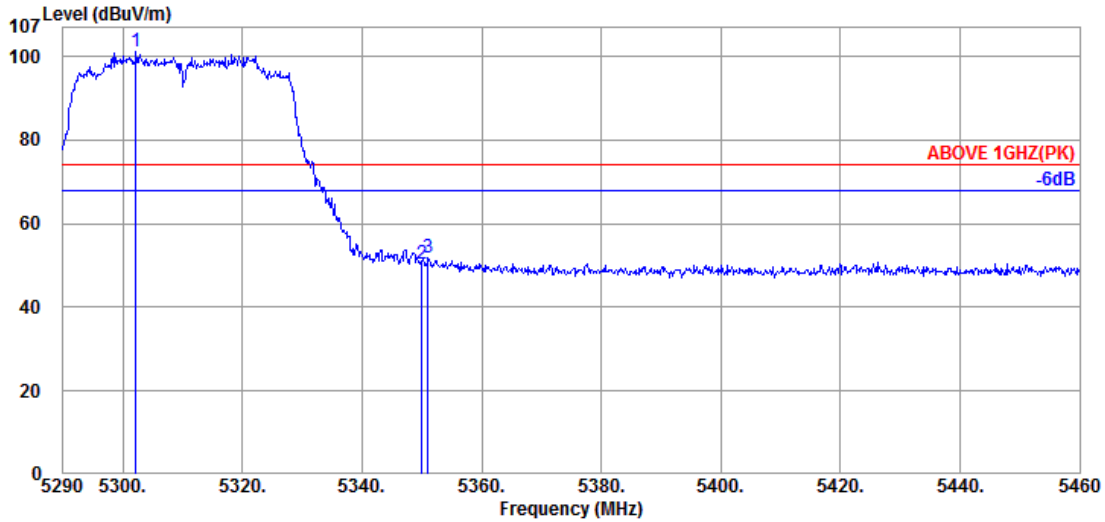

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	34.60	10.45	34.33	90.50	101.22	---	---	Peak
5350.010	34.60	10.48	34.31	39.77	50.54	74.00	23.46	Peak
5351.030	34.60	10.48	34.31	40.94	51.71	74.00	22.29	Peak

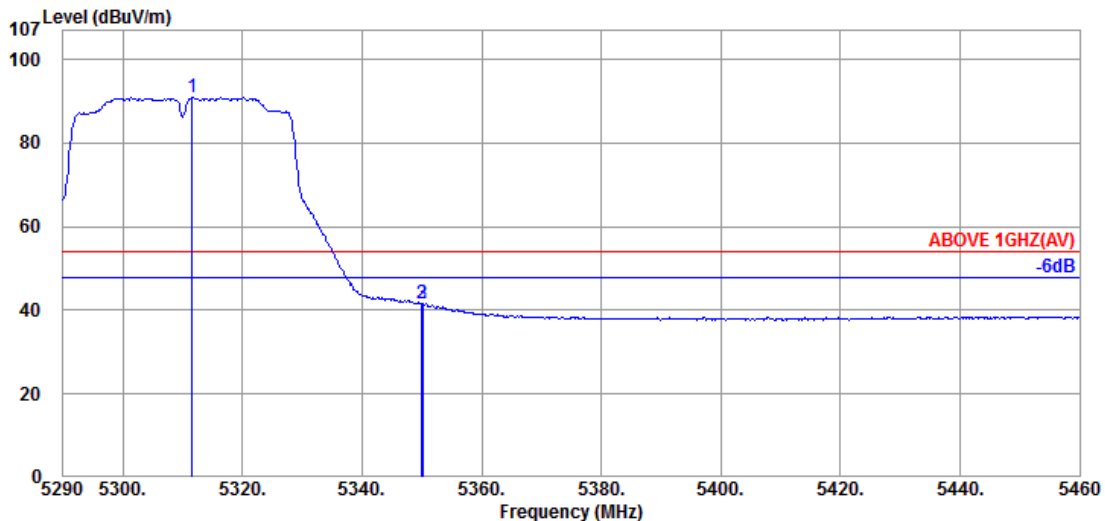


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.590	34.60	10.46	34.33	80.10	90.83	---	---	Average
5350.010	34.60	10.48	34.31	30.70	41.47	54.00	12.53	Average
5350.180	34.60	10.48	34.31	30.75	41.52	54.00	12.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

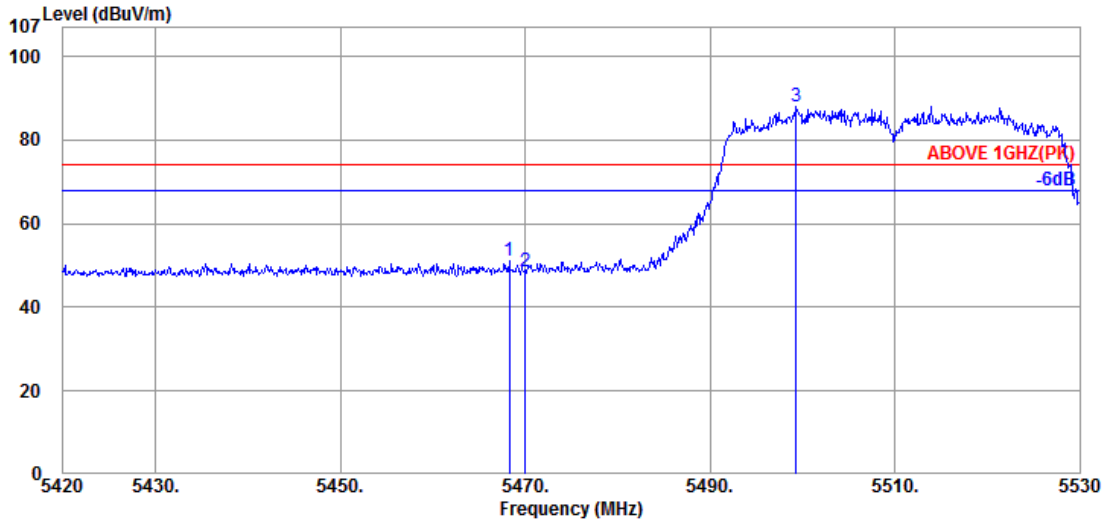

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	34.67	10.54	34.28	40.05	50.98	74.00	23.02	Peak
5470.050	34.67	10.54	34.28	37.55	48.48	74.00	25.52	Peak
@ 5499.310	34.60	10.56	34.27	77.25	88.14	---	---	Peak

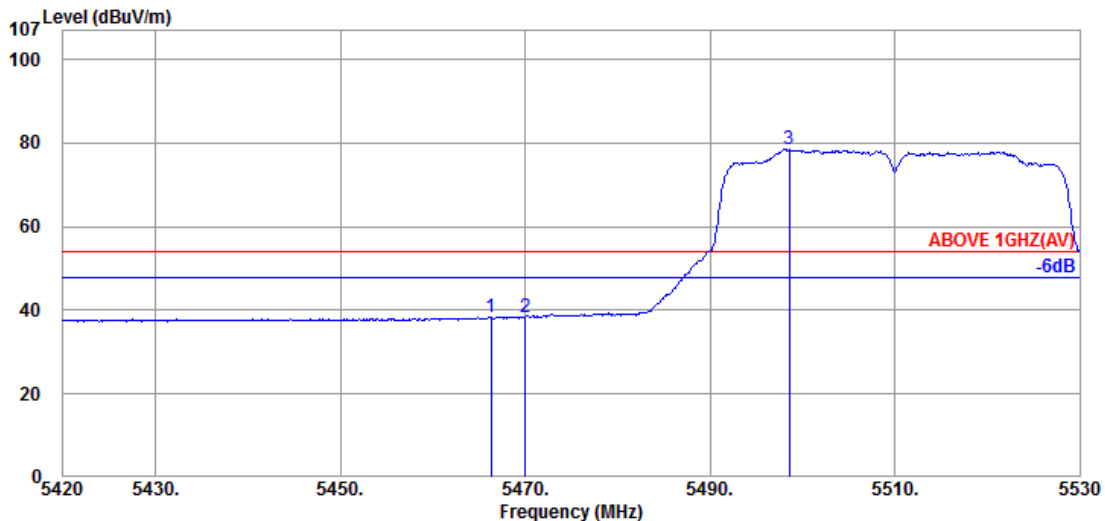


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.310	34.67	10.54	34.28	27.50	38.43	54.00	15.57	Average
5470.050	34.67	10.54	34.28	27.42	38.35	54.00	15.65	Average
@ 5498.540	34.60	10.56	34.27	67.51	78.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

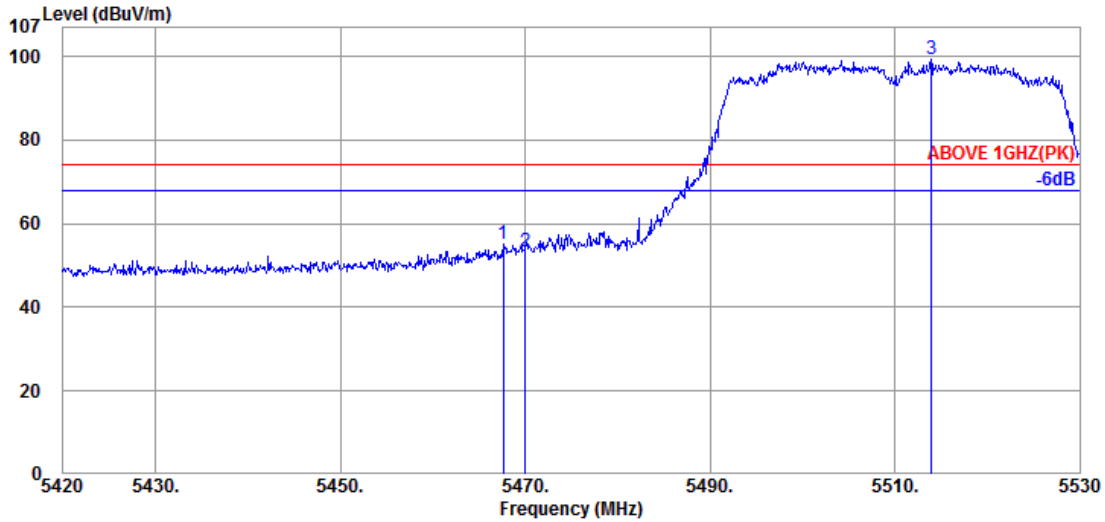

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.630	34.67	10.54	34.28	44.34	55.27	74.00	18.73	Peak
5470.050	34.67	10.54	34.28	42.35	53.28	74.00	20.72	Peak
@ 5513.940	34.60	10.58	34.28	88.46	99.36	---	---	Peak

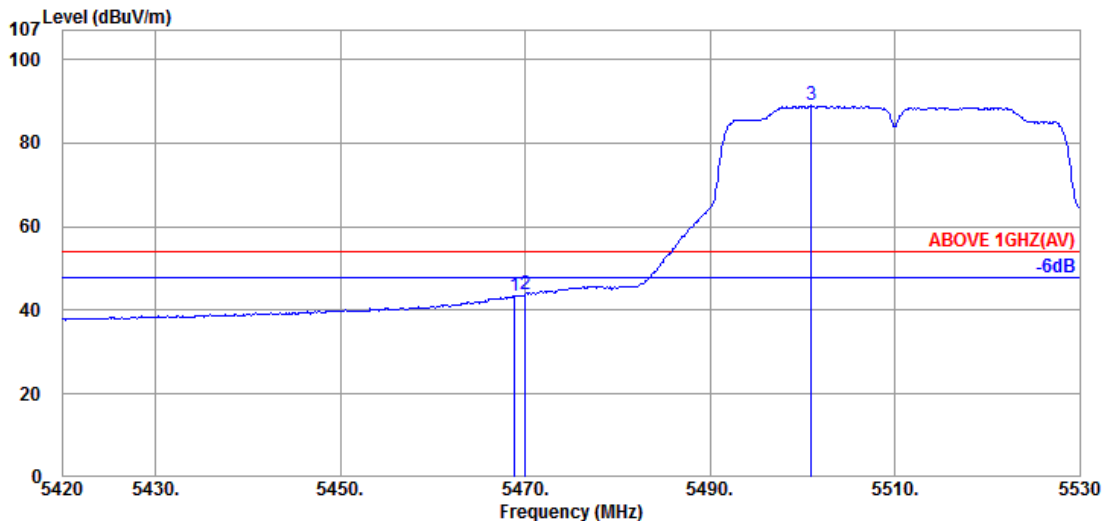


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.67	10.54	34.28	32.57	43.50	54.00	10.50	Average
5470.050	34.67	10.54	34.28	32.89	43.82	54.00	10.18	Average
@ 5500.960	34.60	10.56	34.27	78.04	88.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

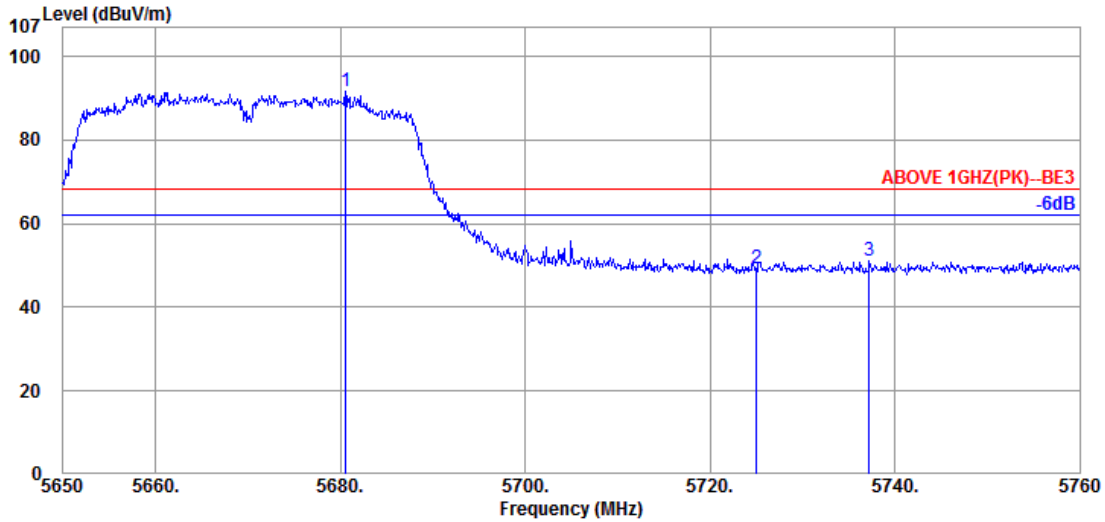

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.580	34.73	10.78	34.36	80.41	91.56	---	---	Peak
5725.020	34.80	10.84	34.37	38.05	49.32	68.20	18.88	Peak
5737.230	34.80	10.86	34.38	39.74	51.02	68.20	17.18	Peak

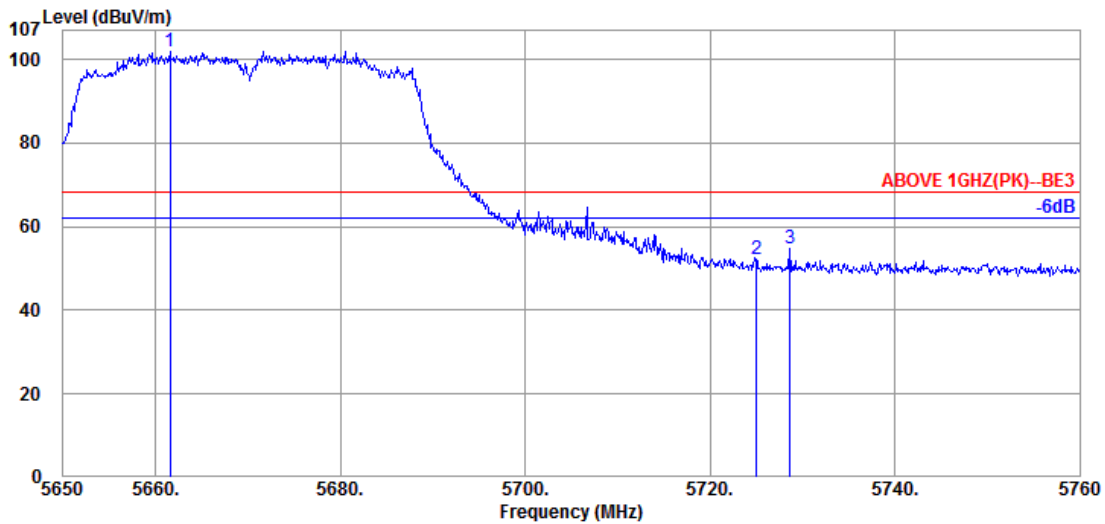


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.550	34.67	10.76	34.35	90.77	101.85	---	---	Peak
5725.020	34.80	10.84	34.37	40.99	52.26	68.20	15.94	Peak
5728.650	34.80	10.84	34.38	43.59	54.85	68.20	13.35	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

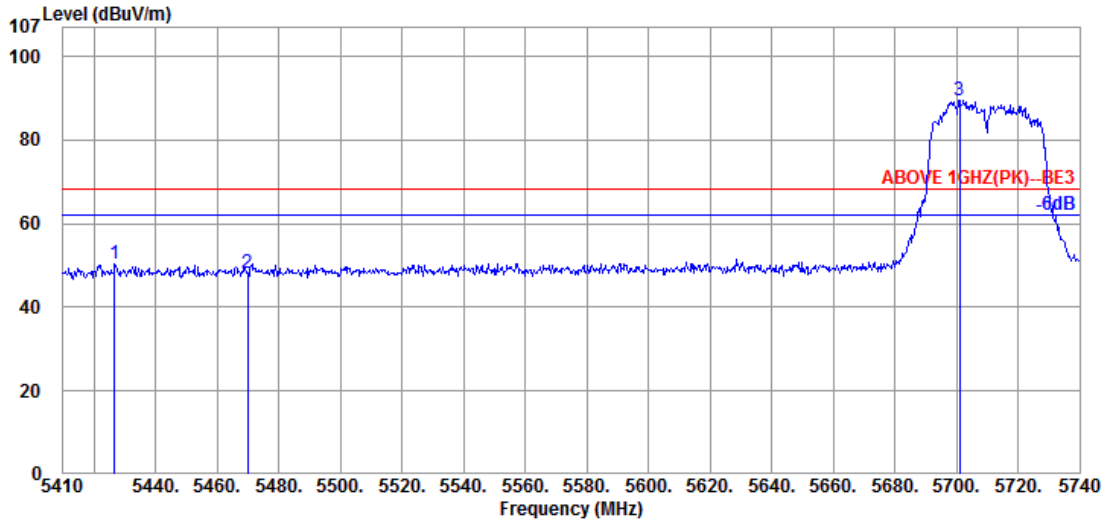

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.830	34.65	10.51	34.29	39.51	50.38	68.20	17.82	Peak
5470.060	34.67	10.54	34.28	37.35	48.28	68.20	19.92	Peak
@ 5701.060	34.80	10.82	34.36	78.29	89.55	---	---	Peak

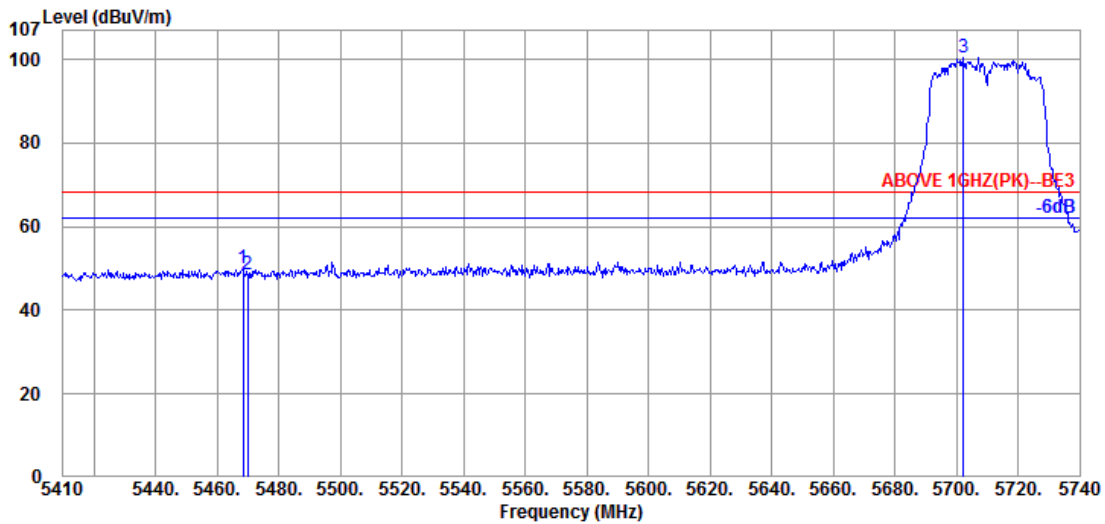


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.410	34.67	10.54	34.28	38.92	49.85	68.20	18.35	Peak
5470.060	34.67	10.54	34.28	37.48	48.41	68.20	19.79	Peak
@ 5702.380	34.80	10.82	34.36	89.31	100.57	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

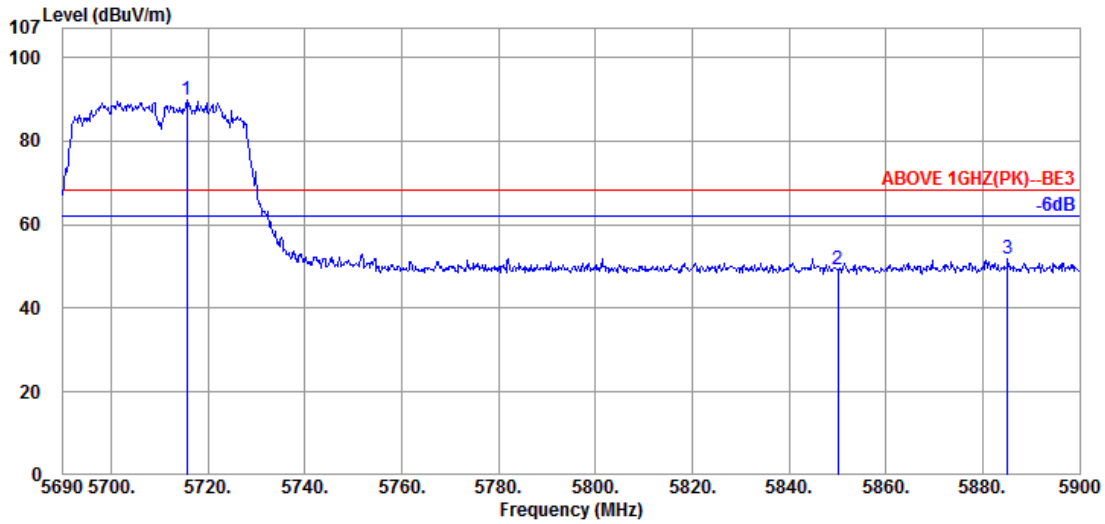

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.620	34.80	10.82	34.37	78.67	89.92	---	---	Peak
5850.020	35.40	10.99	34.43	37.17	49.13	68.20	19.07	Peak
5885.090	35.40	11.04	34.45	39.74	51.73	68.20	16.47	Peak

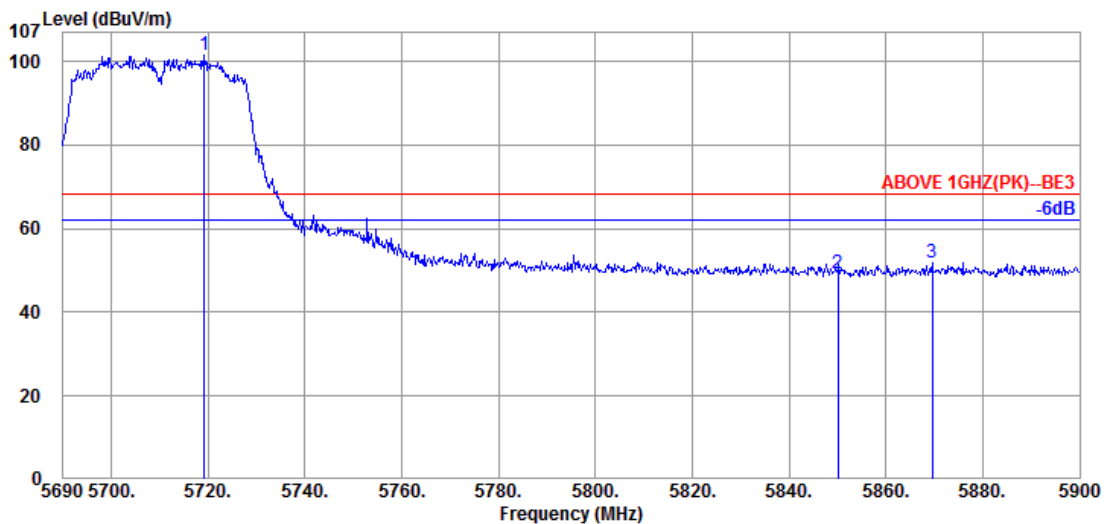


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.190	34.80	10.84	34.37	90.20	101.47	---	---	Peak
5850.020	35.40	10.99	34.43	37.17	49.13	68.20	19.07	Peak
5869.550	35.40	11.02	34.44	40.02	52.00	68.20	16.20	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

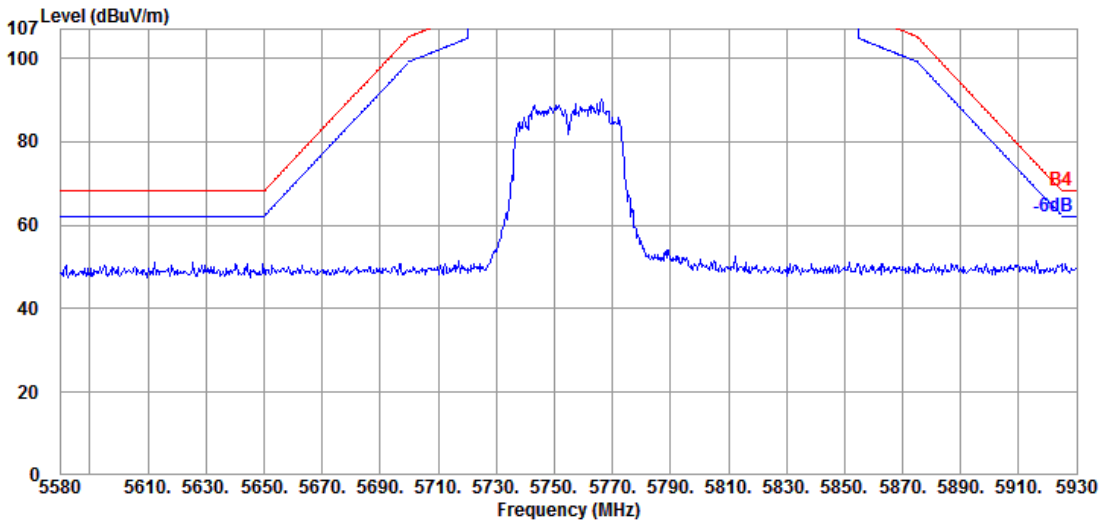


Antenna at Vertical Polarization

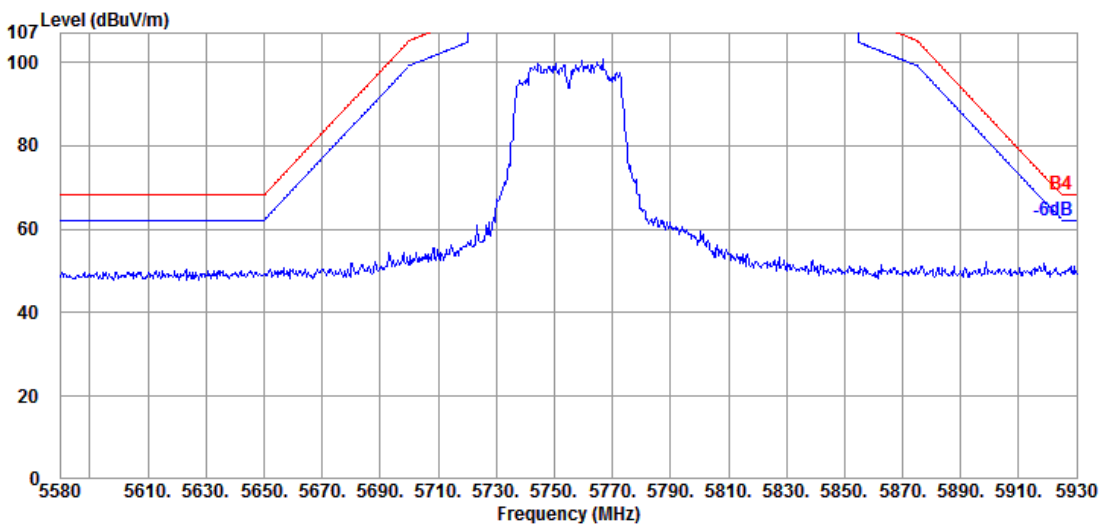


Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

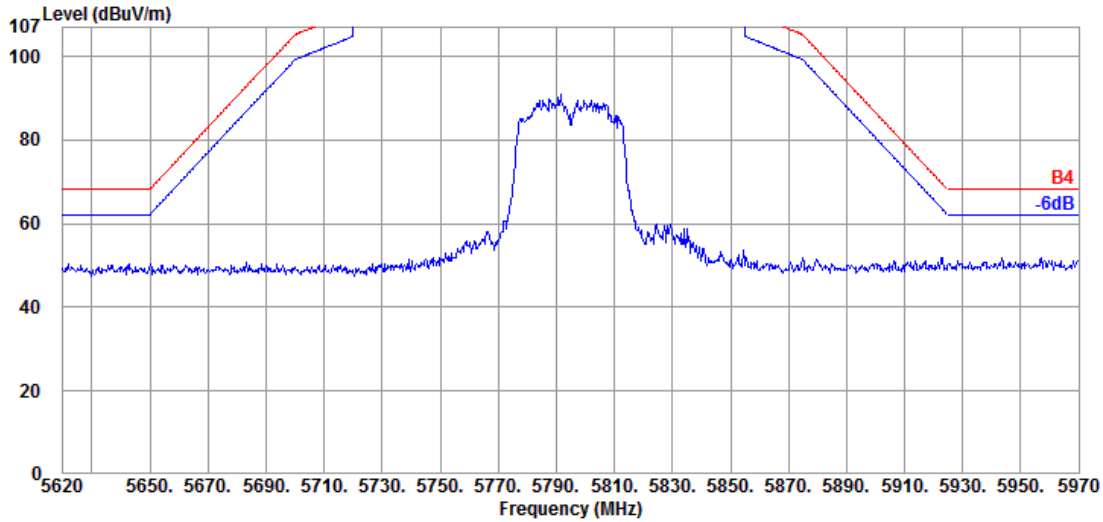

Antenna at Vertical Polarization

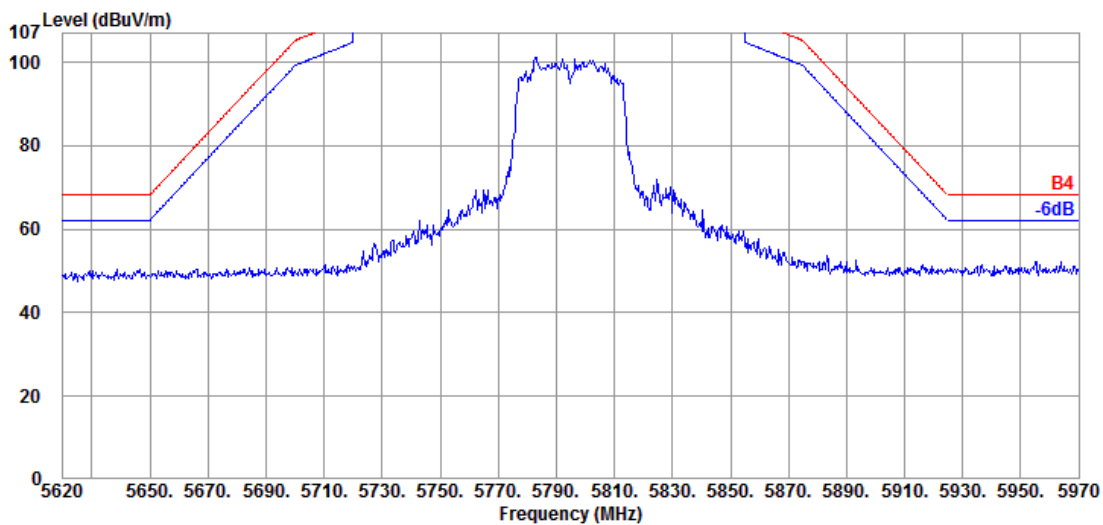


Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

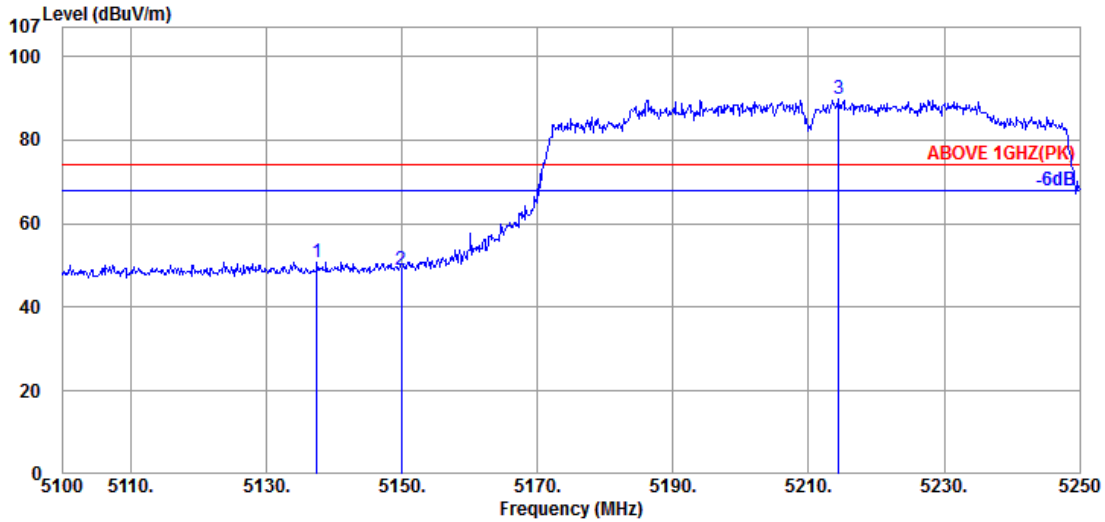

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.500	34.37	10.35	34.39	40.44	50.77	74.00	23.23	Peak
5149.950	34.40	10.36	34.38	38.47	48.85	74.00	25.15	Peak
@ 5214.450	34.50	10.40	34.36	79.12	89.66	---	---	Peak

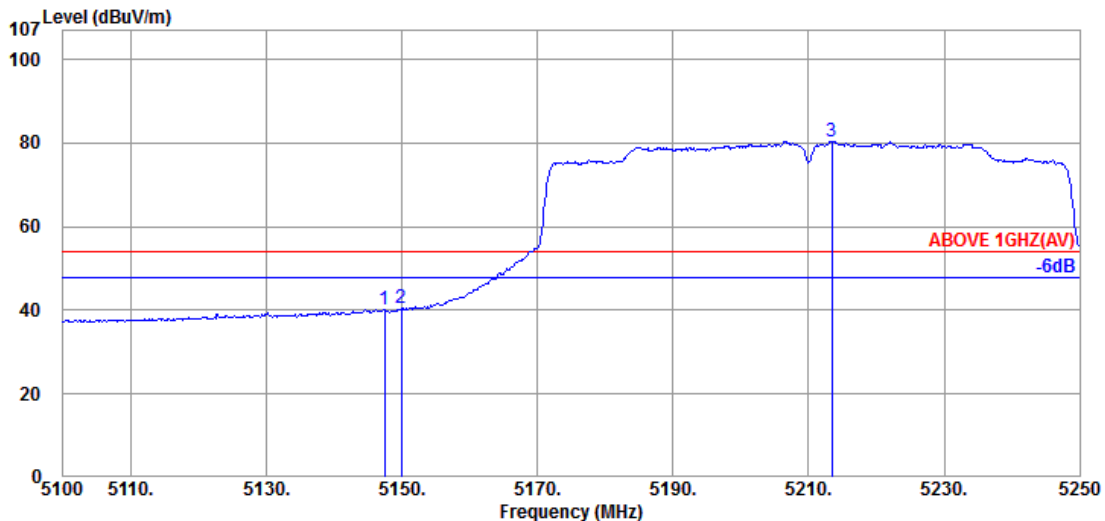


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	34.40	10.36	34.38	29.79	40.17	54.00	13.83	Average
5149.950	34.40	10.36	34.38	30.10	40.48	54.00	13.52	Average
@ 5213.400	34.50	10.40	34.36	69.85	80.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

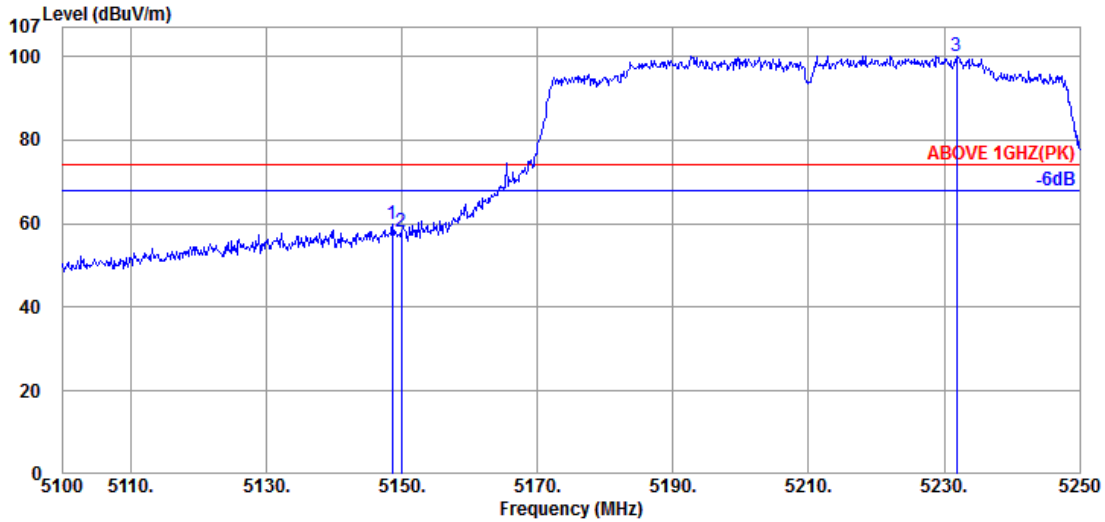

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.40	10.36	34.38	49.34	59.72	74.00	14.28	Peak
5149.950	34.40	10.36	34.38	47.73	58.11	74.00	15.89	Peak
@ 5231.850	34.50	10.41	34.35	89.68	100.24	---	---	Peak

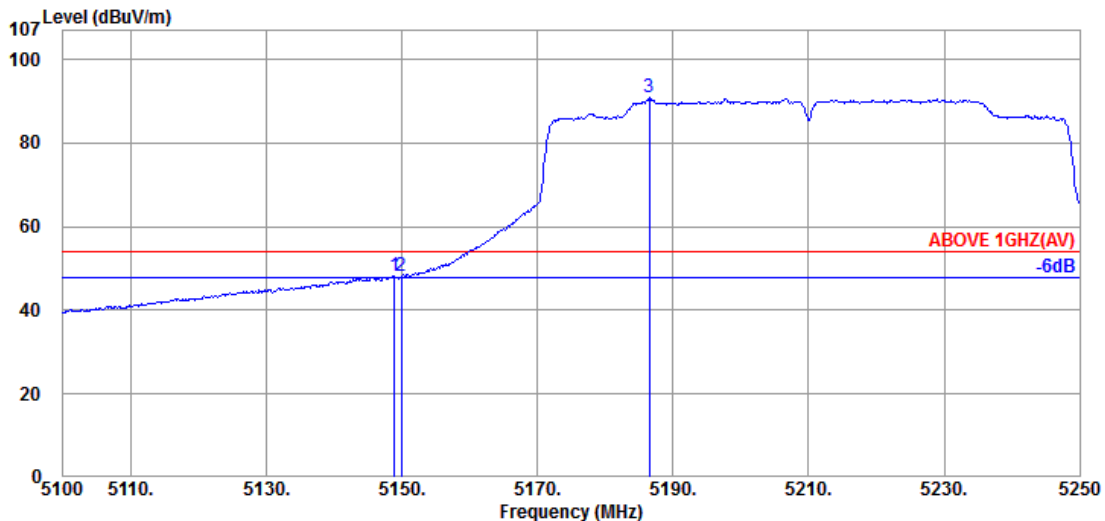


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.40	10.36	34.38	37.69	48.07	54.00	5.93	Average
5149.950	34.40	10.36	34.38	37.77	48.15	54.00	5.85	Average
@ 5186.550	34.50	10.38	34.37	80.31	90.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

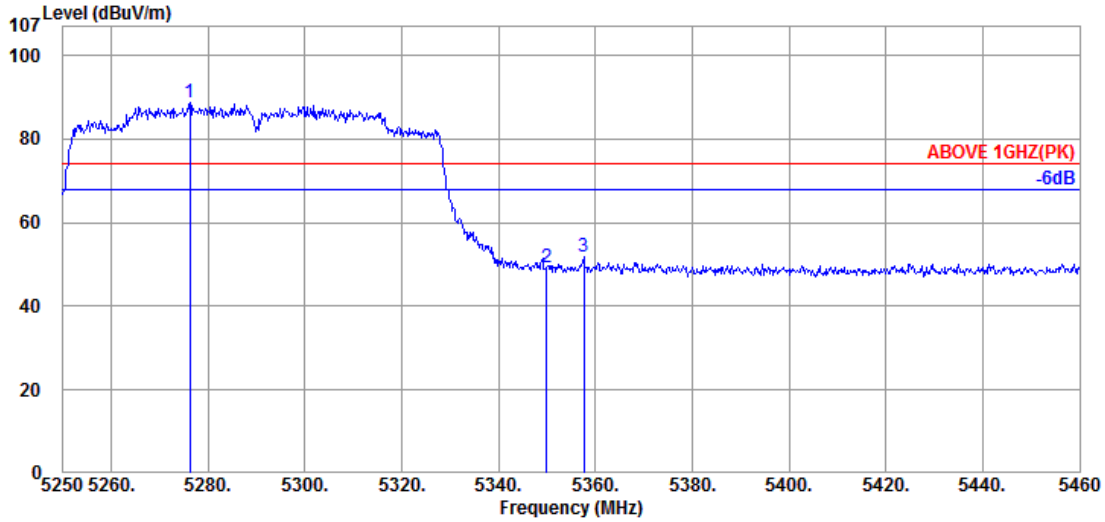

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.250	34.53	10.44	34.34	78.04	88.67	---	---	Peak
5349.960	34.60	10.48	34.31	38.42	49.19	74.00	24.81	Peak
5357.520	34.60	10.48	34.31	40.95	51.72	74.00	22.28	Peak

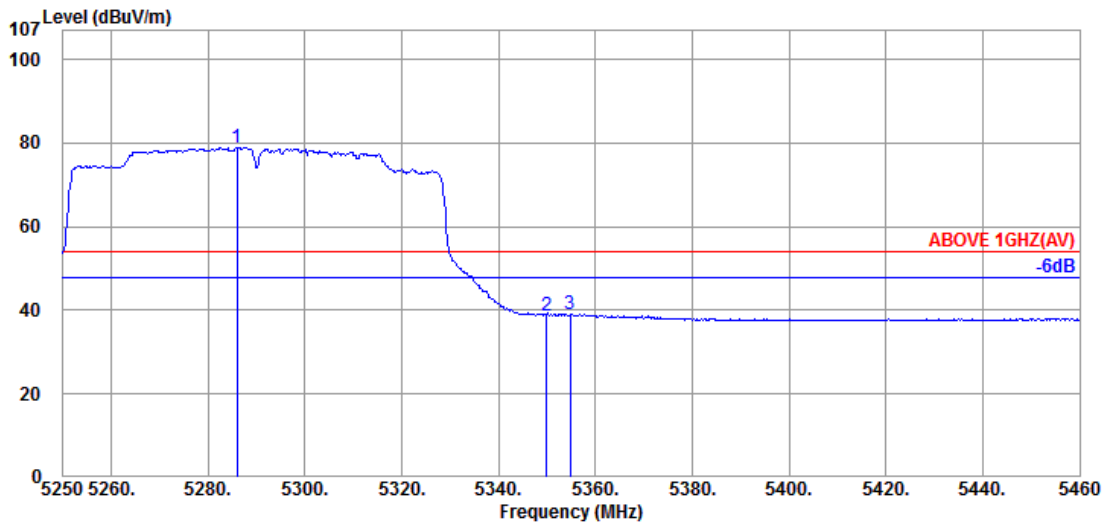


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5285.910	34.57	10.44	34.34	68.23	78.90	---	---	Average
5349.960	34.60	10.48	34.31	28.04	38.81	54.00	15.19	Average
5354.790	34.60	10.48	34.31	28.28	39.05	54.00	14.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

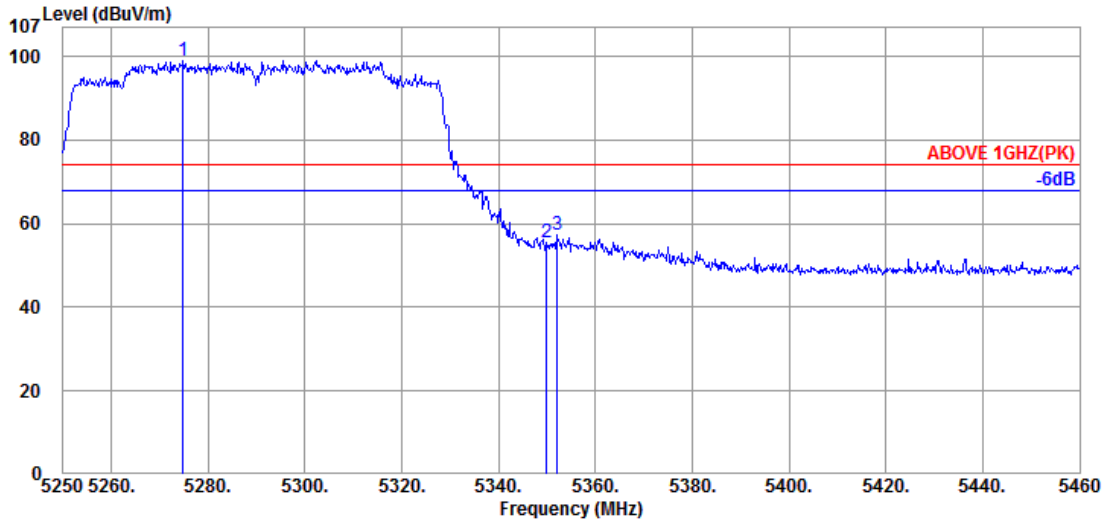

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.780	34.53	10.43	34.34	88.49	99.11	---	---	Peak
5349.960	34.60	10.48	34.31	44.82	55.59	74.00	18.41	Peak
5352.060	34.60	10.48	34.31	46.73	57.50	74.00	16.50	Peak

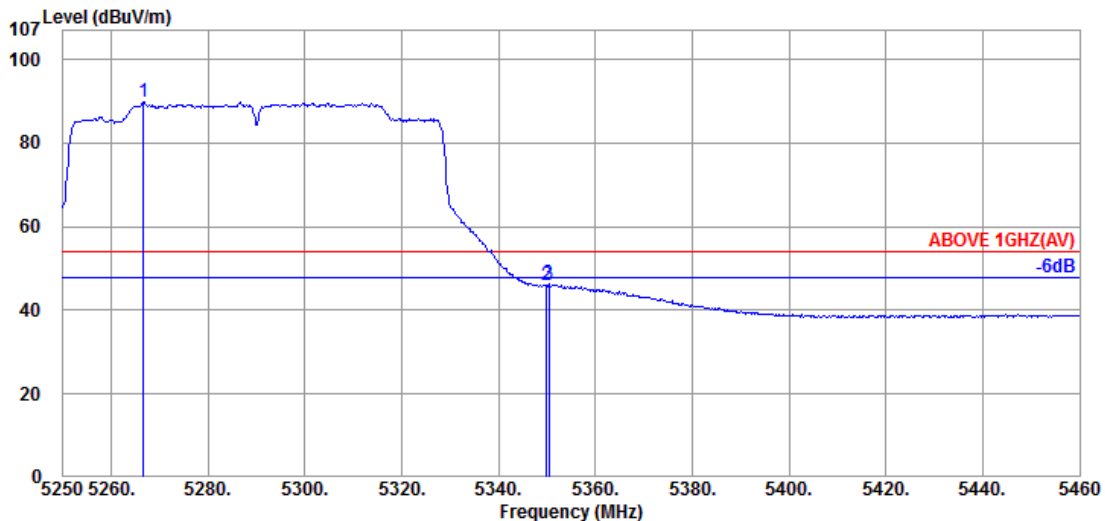


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.590	34.53	10.43	34.34	79.14	89.76	---	---	Average
5349.960	34.60	10.48	34.31	35.07	45.84	54.00	8.16	Average
5350.380	34.60	10.48	34.31	35.47	46.24	54.00	7.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

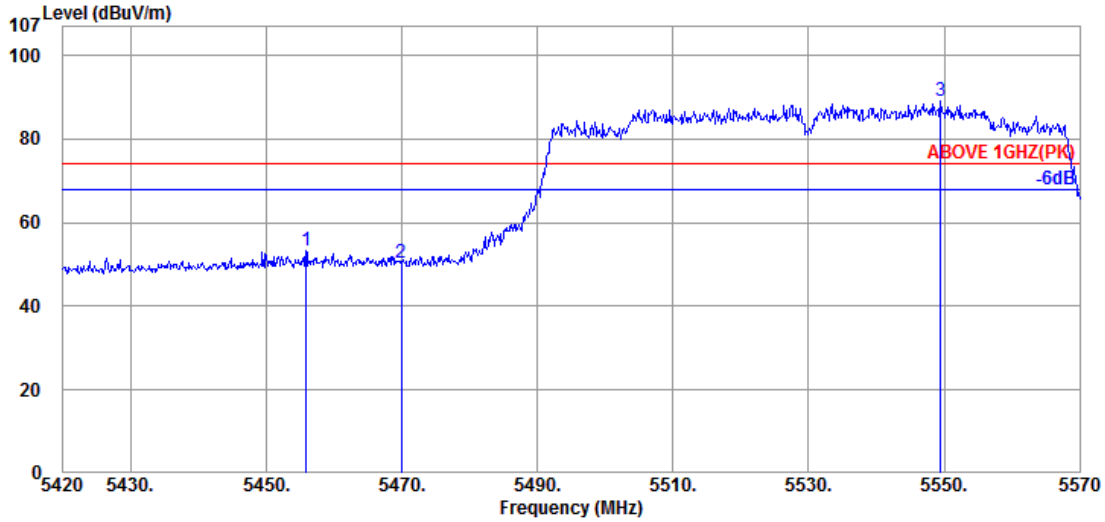

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.850	34.70	10.53	34.28	42.22	53.17	74.00	20.83	Peak
5469.950	34.67	10.54	34.28	39.51	50.44	74.00	23.56	Peak
@ 5549.450	34.60	10.63	34.30	78.14	89.07	---	---	Peak

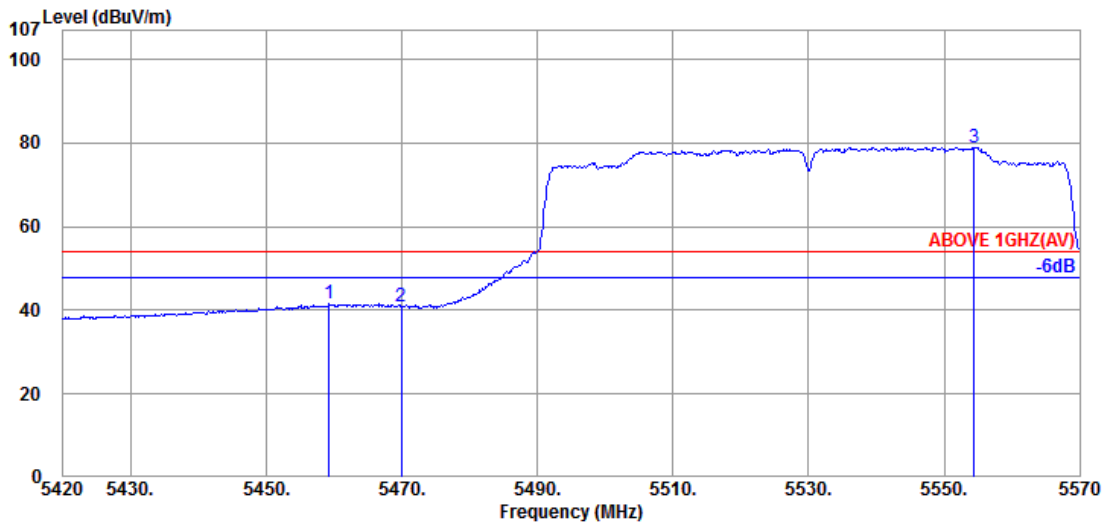


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.70	10.53	34.28	30.59	41.54	54.00	12.46	Average
5469.950	34.67	10.54	34.28	30.03	40.96	54.00	13.04	Average
@ 5554.400	34.60	10.63	34.30	68.09	79.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

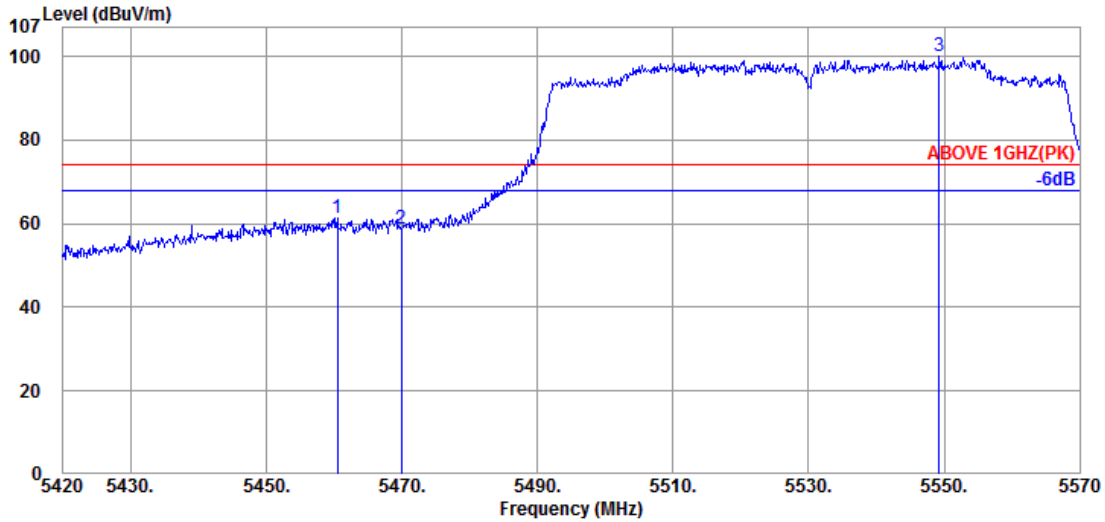

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.500	34.70	10.53	34.28	50.39	61.34	74.00	12.66	Peak
5469.950	34.67	10.54	34.28	47.72	58.65	74.00	15.35	Peak
@ 5549.300	34.60	10.63	34.30	89.23	100.16	---	---	Peak

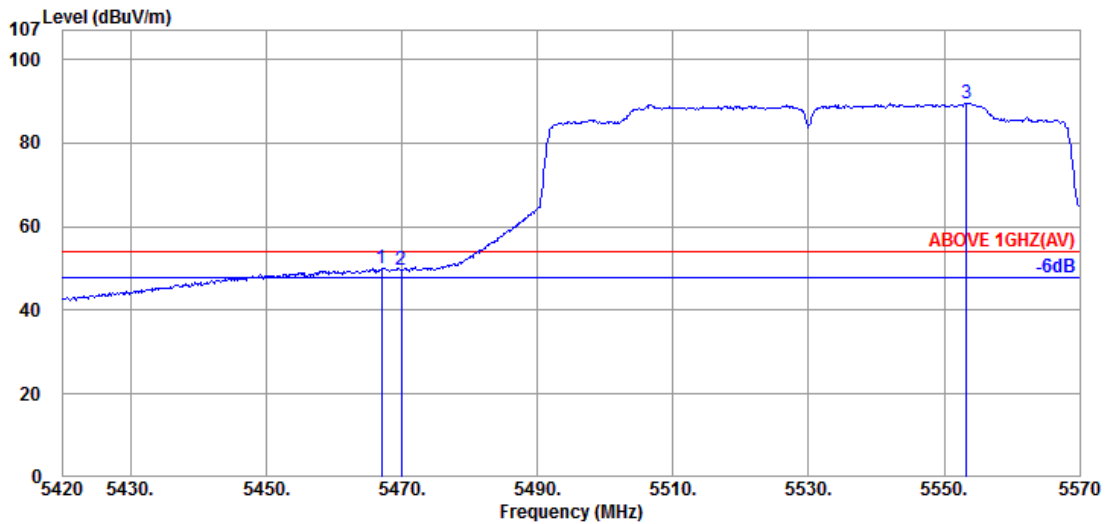


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.950	34.67	10.54	34.28	39.14	50.07	54.00	3.93	Average
5469.950	34.67	10.54	34.28	38.89	49.82	54.00	4.18	Average
@ 5553.350	34.60	10.63	34.30	78.69	89.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5610MHz

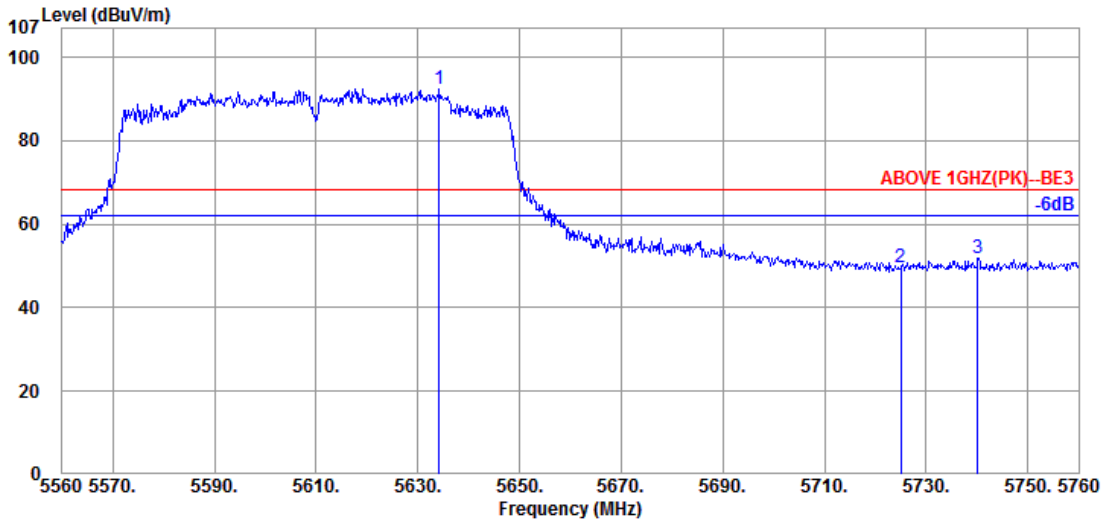

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5634.200	34.60	10.73	34.34	81.33	92.32	---	---	Peak
5725.000	34.80	10.84	34.37	38.51	49.78	68.20	18.42	Peak
5740.200	34.80	10.86	34.38	40.49	51.77	68.20	16.43	Peak

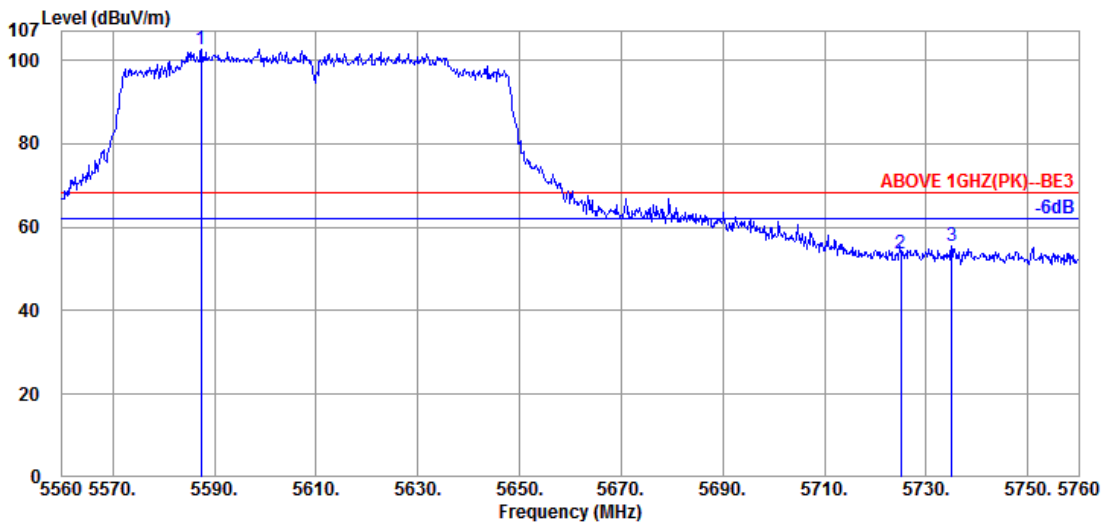


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5587.400	34.60	10.67	34.31	91.78	102.74	---	---	Peak
5725.000	34.80	10.84	34.37	42.29	53.56	68.20	14.64	Peak
5735.000	34.80	10.86	34.38	44.09	55.37	68.20	12.83	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

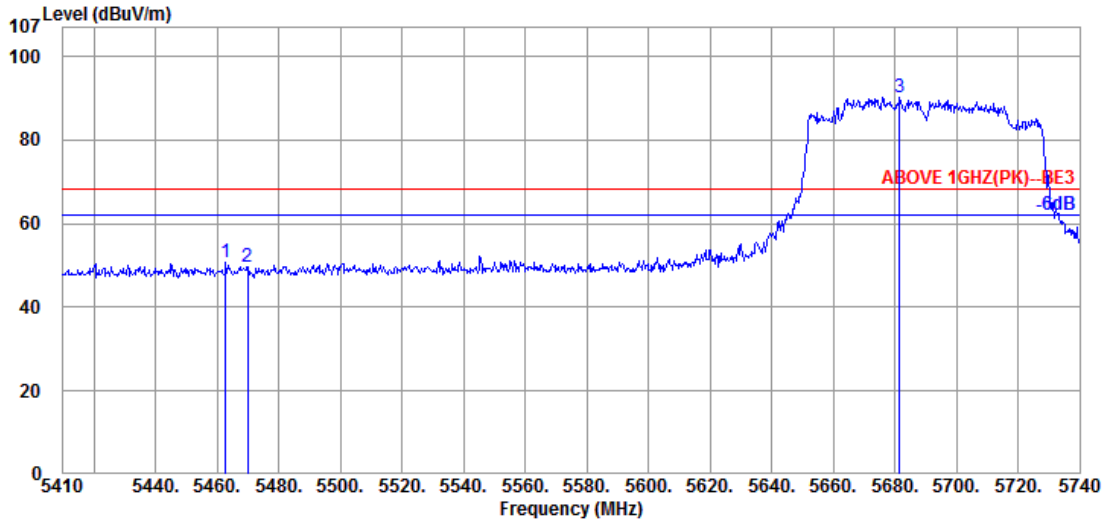

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.70	10.54	34.28	39.73	50.69	68.20	17.51	Peak
5470.060	34.67	10.54	34.28	38.71	49.64	68.20	18.56	Peak
@ 5681.590	34.73	10.78	34.36	78.99	90.14	---	---	Peak

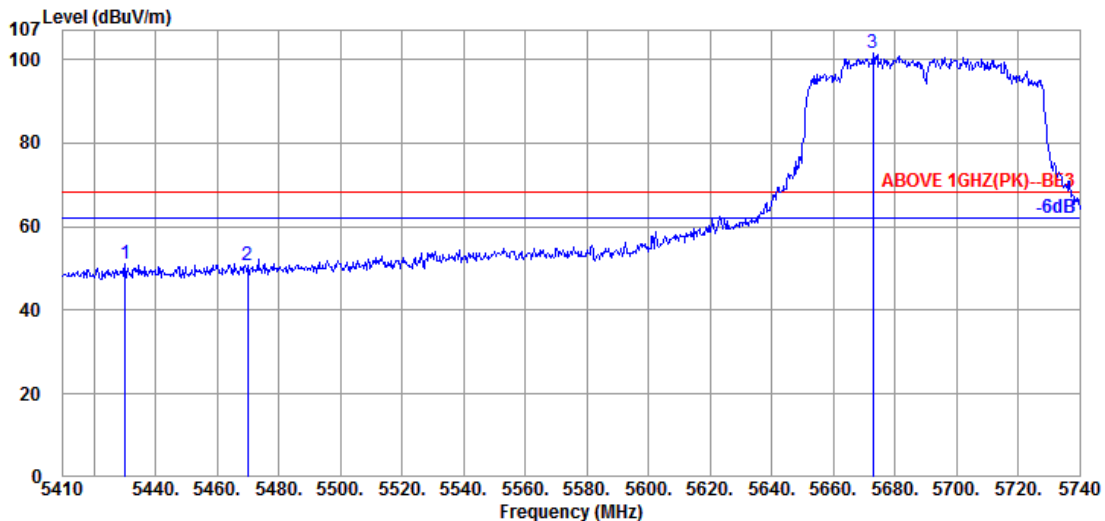


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.130	34.65	10.52	34.29	40.29	51.17	68.20	17.03	Peak
5470.060	34.67	10.54	34.28	39.66	50.59	68.20	17.61	Peak
@ 5673.010	34.73	10.78	34.36	90.40	101.55	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

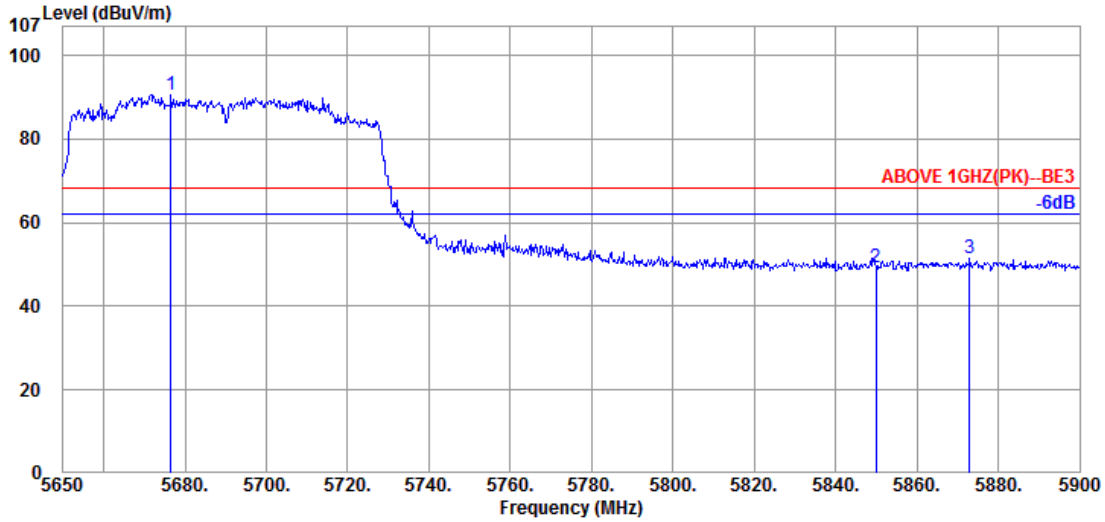

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.500	34.73	10.78	34.36	79.59	90.74	---	---	Peak
5850.000	35.40	10.99	34.43	37.47	49.43	68.20	18.77	Peak
5873.000	35.40	11.04	34.44	39.46	51.46	68.20	16.74	Peak

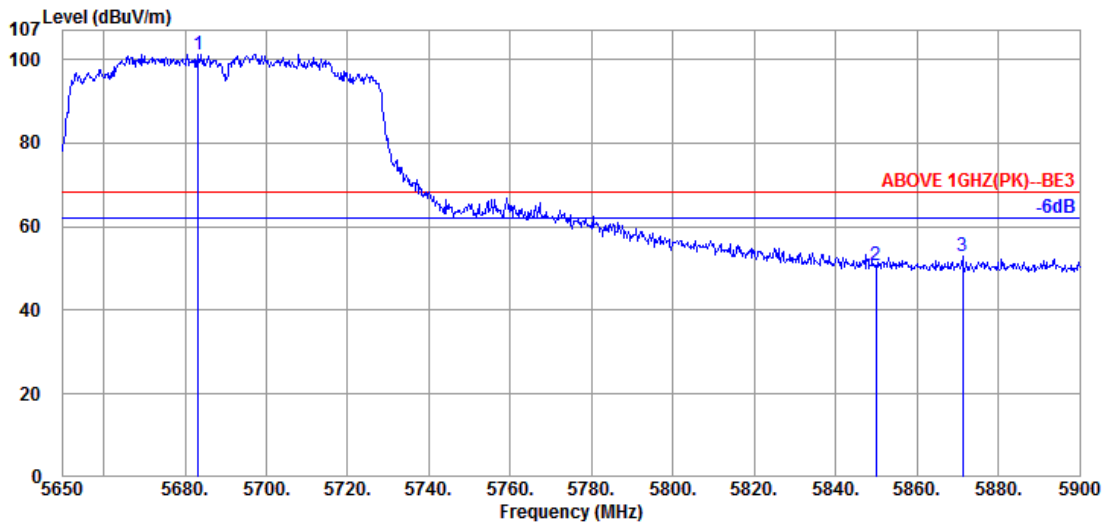


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.250	34.73	10.78	34.36	90.12	101.27	---	---	Peak
5850.000	35.40	10.99	34.43	38.74	50.70	68.20	17.50	Peak
5871.250	35.40	11.04	34.44	40.87	52.87	68.20	15.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

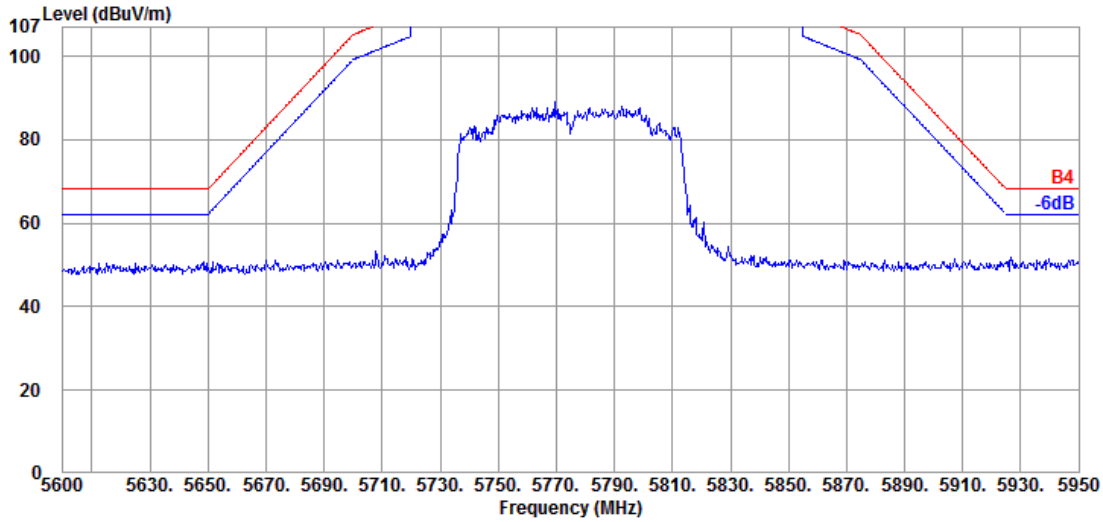

Antenna at Vertical Polarization

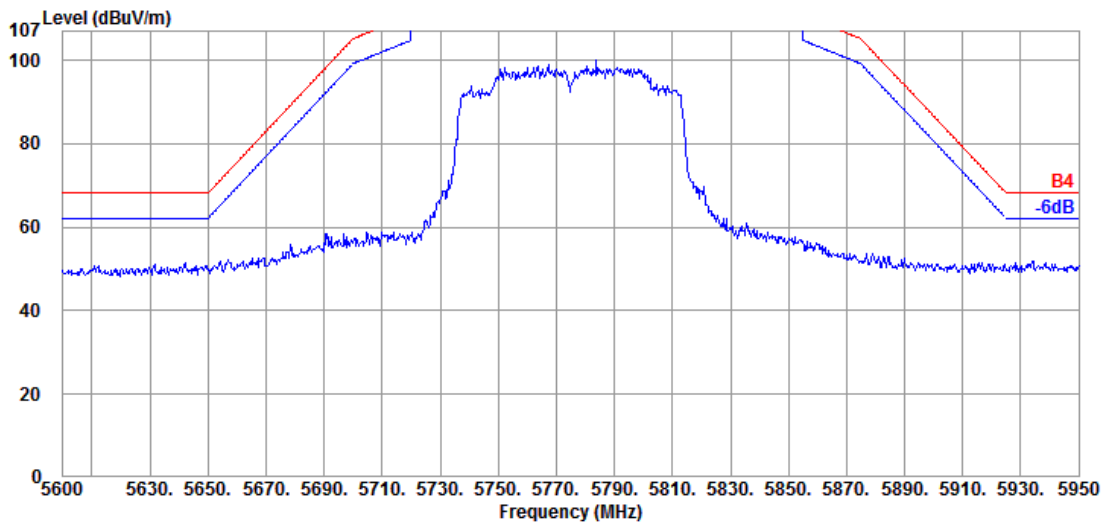


Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

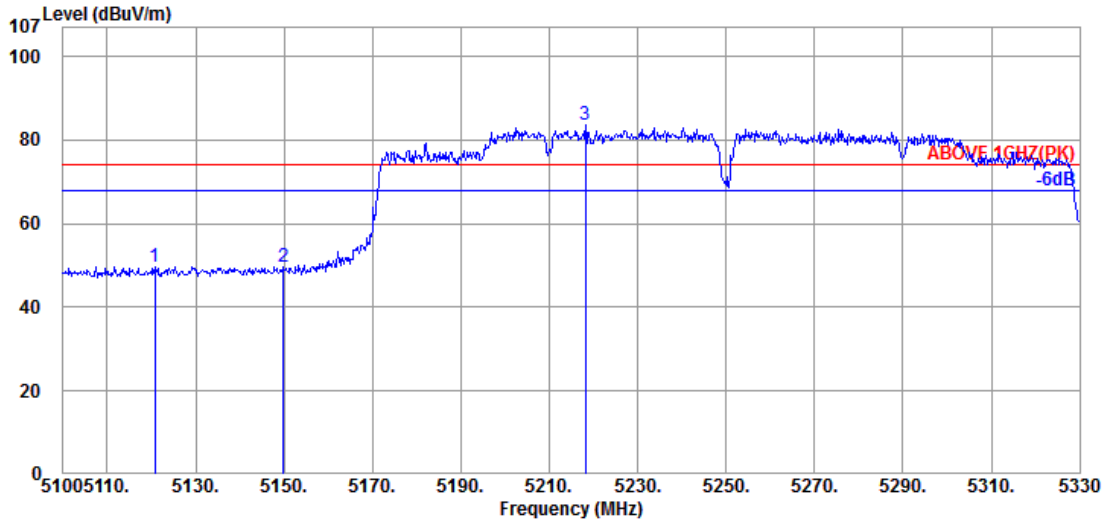

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.700	34.33	10.35	34.39	39.52	49.81	74.00	24.19	Peak
5149.910	34.40	10.36	34.38	39.38	49.76	74.00	24.24	Peak
@ 5218.220	34.50	10.40	34.36	73.08	83.62	---	---	Peak

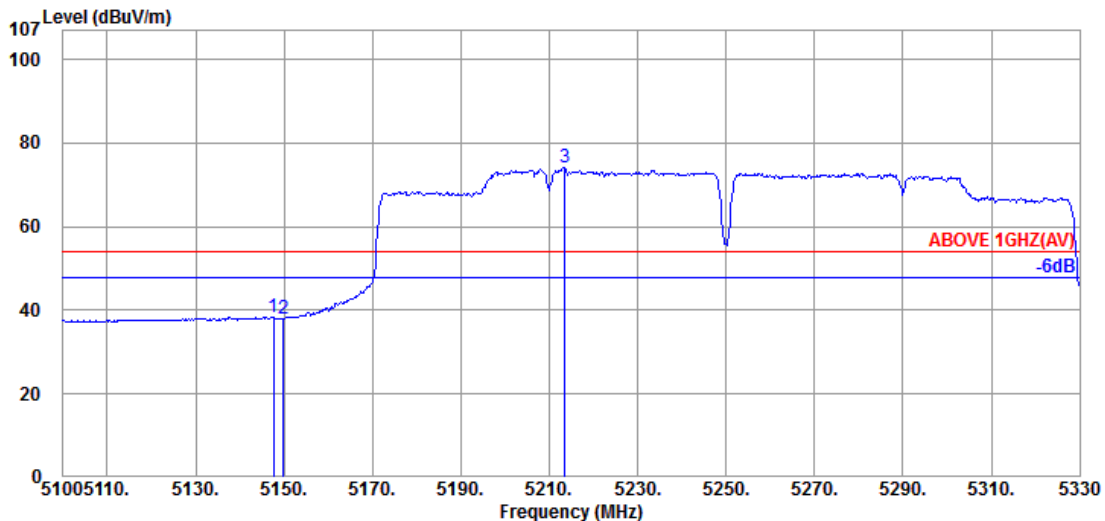


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.610	34.40	10.36	34.38	27.98	38.36	54.00	15.64	Average
5149.910	34.40	10.36	34.38	27.71	38.09	54.00	15.91	Average
@ 5213.620	34.50	10.40	34.36	63.66	74.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

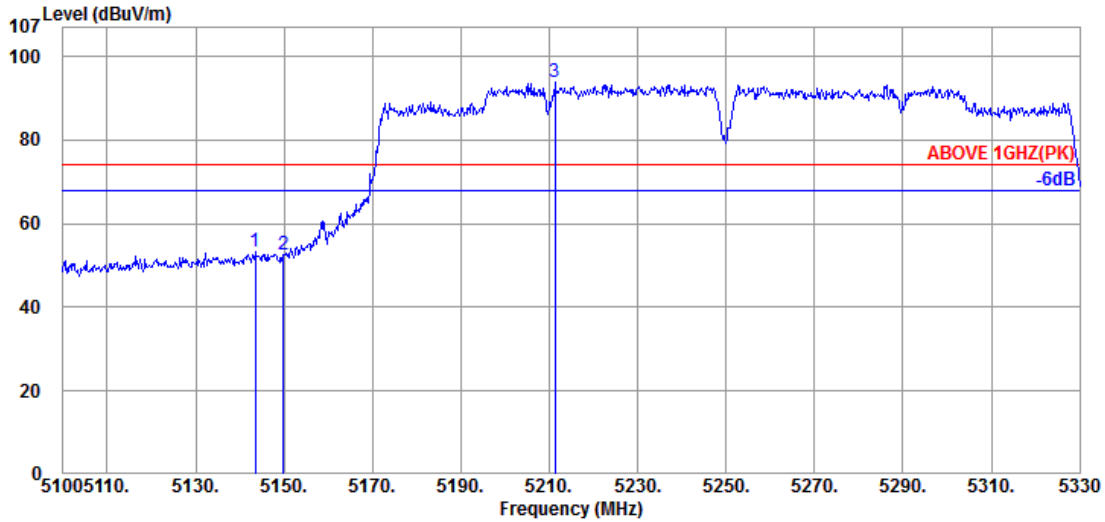

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.470	34.40	10.36	34.38	42.85	53.23	74.00	20.77	Peak
5149.910	34.40	10.36	34.38	42.09	52.47	74.00	21.53	Peak
@ 5211.320	34.50	10.40	34.36	83.40	93.94	---	---	Peak

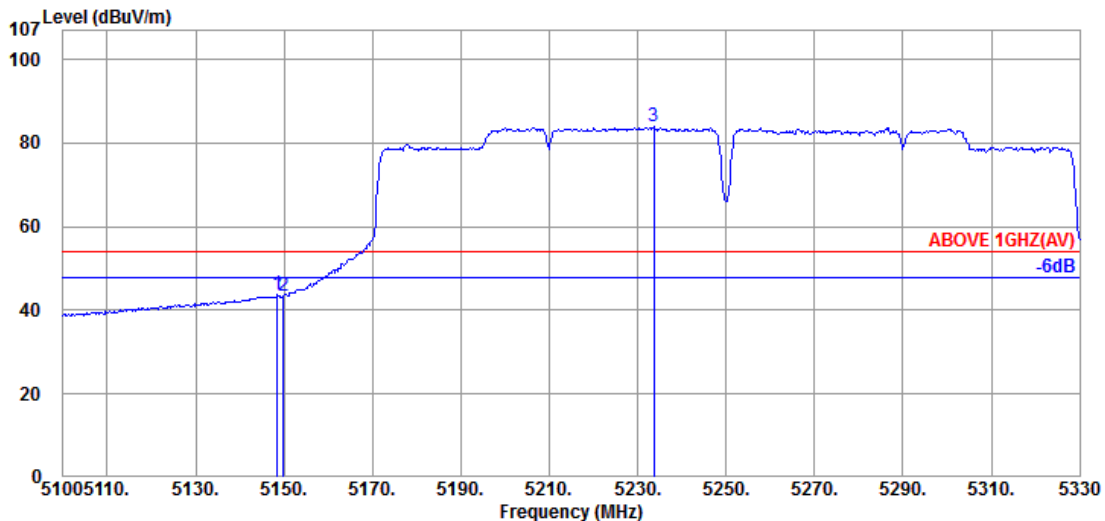


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.530	34.40	10.36	34.38	33.34	43.72	54.00	10.28	Average
5149.910	34.40	10.36	34.38	33.24	43.62	54.00	10.38	Average
@ 5233.630	34.50	10.41	34.35	73.32	83.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

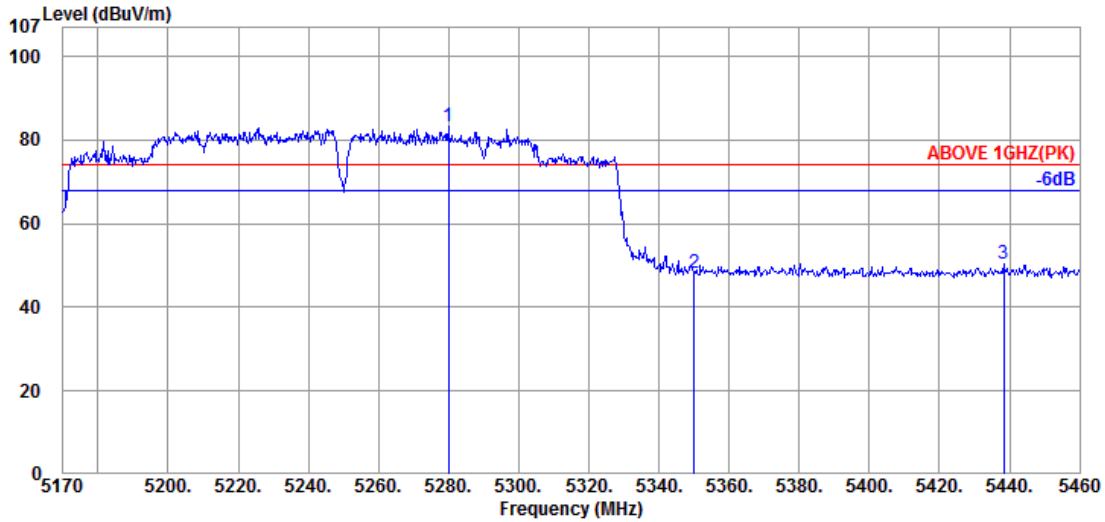

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.910	34.57	10.44	34.34	72.71	83.38	---	---	Peak
5350.090	34.60	10.48	34.31	37.61	48.38	74.00	25.62	Peak
5438.250	34.67	10.52	34.29	39.38	50.28	74.00	23.72	Peak

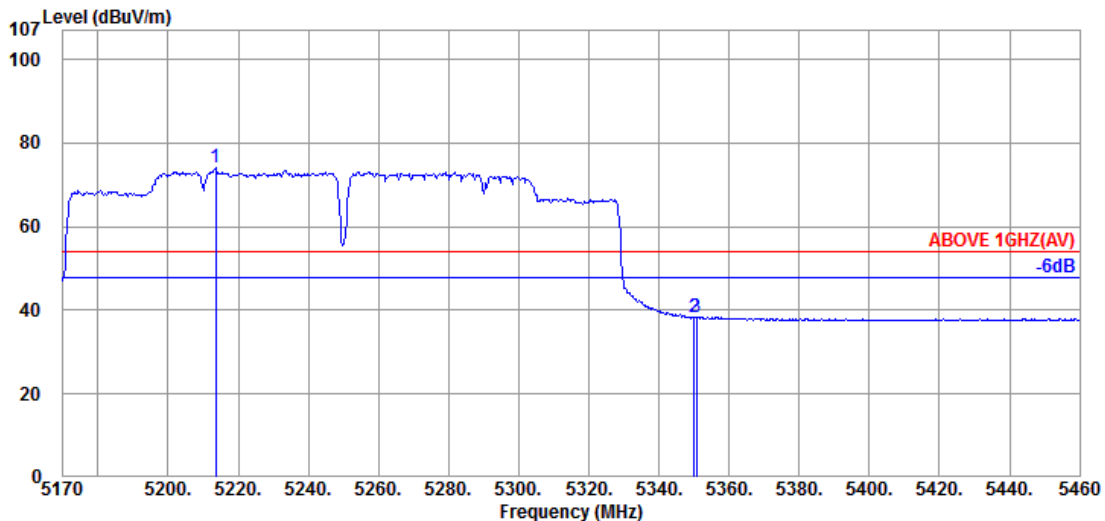


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5213.500	34.50	10.40	34.36	63.50	74.04	---	---	Average
5350.090	34.60	10.48	34.31	27.58	38.35	54.00	15.65	Average
5350.670	34.60	10.48	34.31	27.74	38.51	54.00	15.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

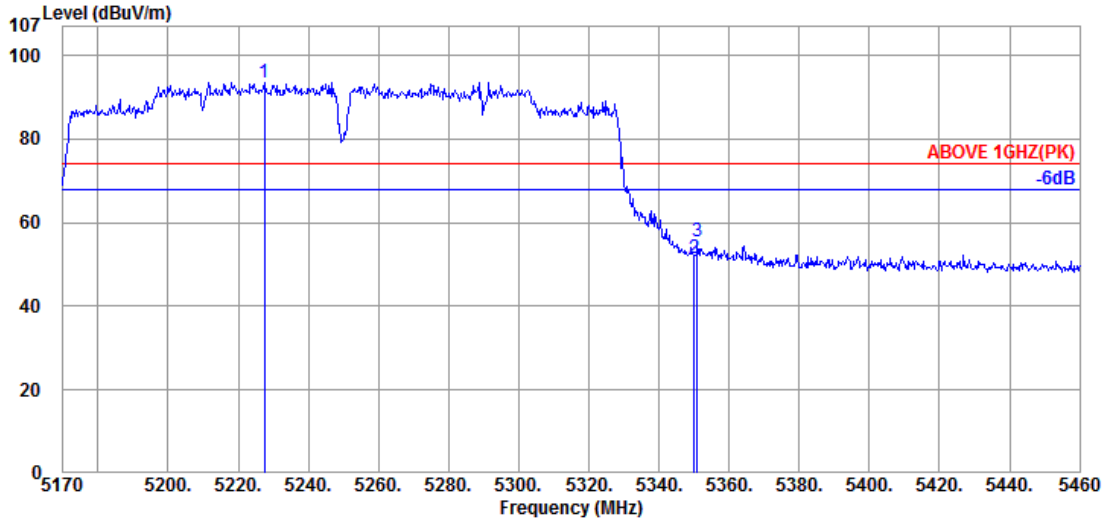

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5227.420	34.50	10.41	34.35	83.08	93.64	---	---	Peak
5350.090	34.60	10.48	34.31	40.78	51.55	74.00	22.45	Peak
5350.960	34.60	10.48	34.31	44.70	55.47	74.00	18.53	Peak

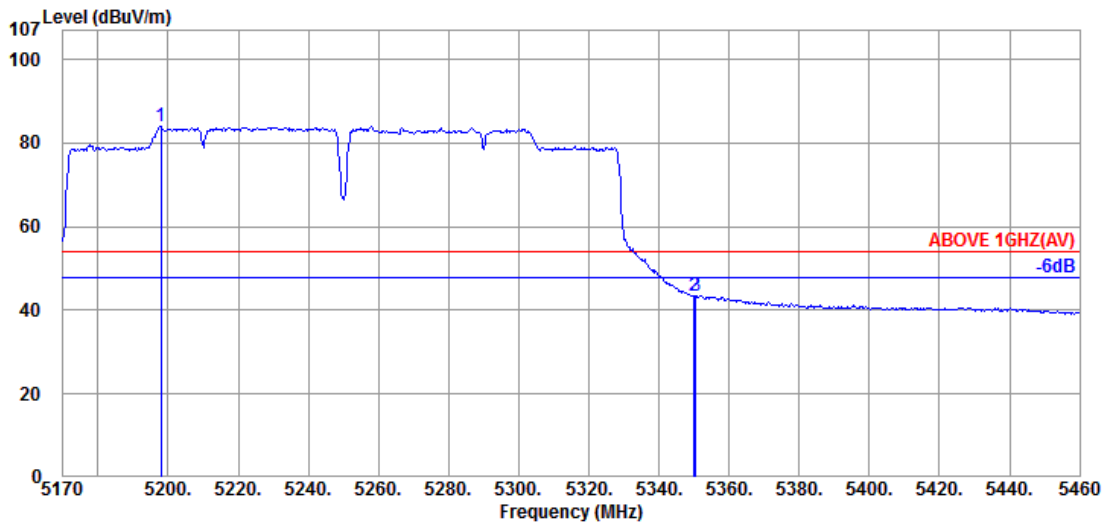


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	34.50	10.39	34.36	73.47	84.00	---	---	Average
5350.090	34.60	10.48	34.31	32.78	43.55	54.00	10.45	Average
5350.380	34.60	10.48	34.31	32.76	43.53	54.00	10.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

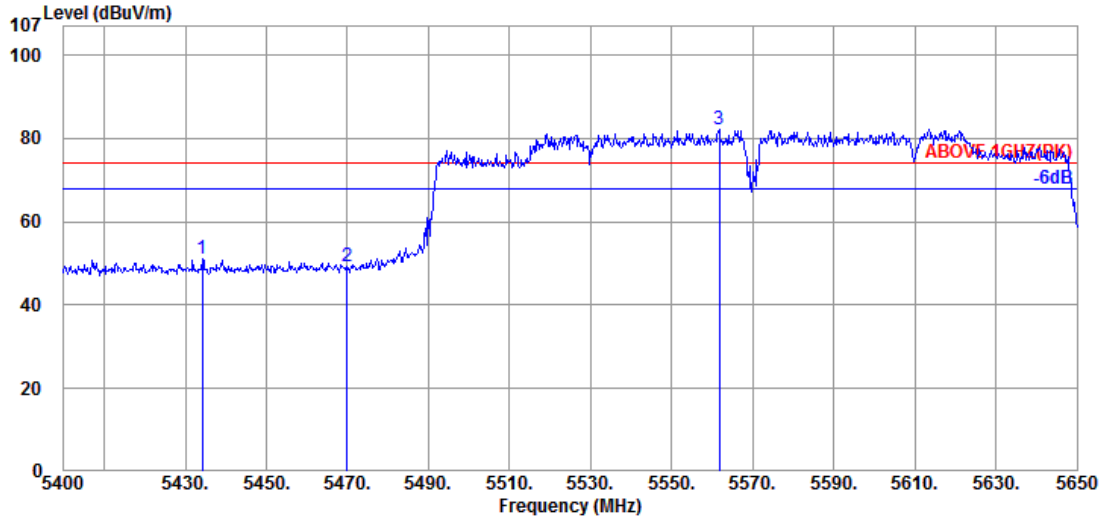

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.250	34.67	10.52	34.29	40.18	51.08	74.00	22.92	Peak
5470.000	34.67	10.54	34.28	38.25	49.18	74.00	24.82	Peak
@ 5561.750	34.60	10.63	34.30	71.27	82.20	---	---	Peak

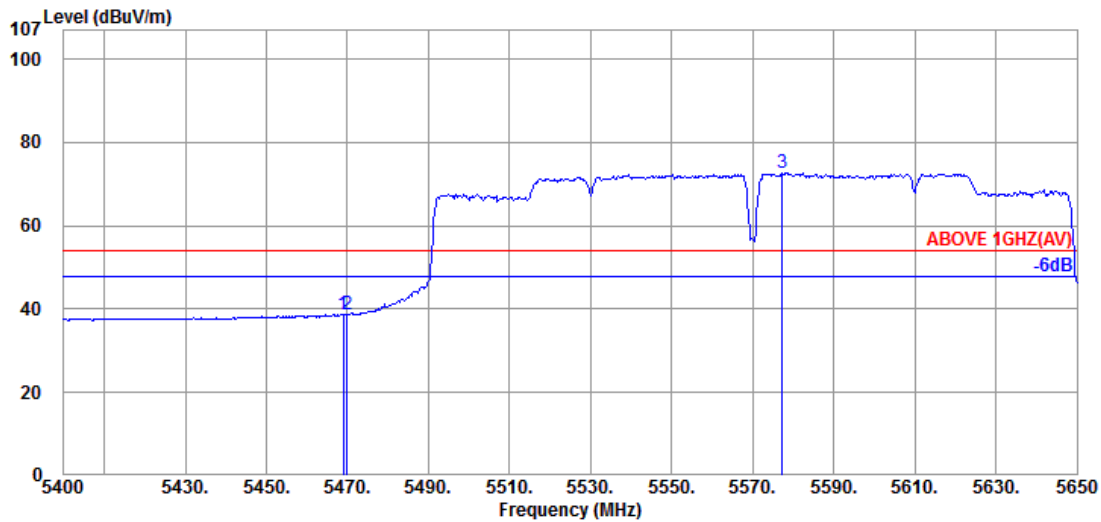


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.67	10.54	34.28	27.91	38.84	54.00	15.16	Average
5470.000	34.67	10.54	34.28	27.84	38.77	54.00	15.23	Average
@ 5577.250	34.60	10.65	34.30	61.78	72.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

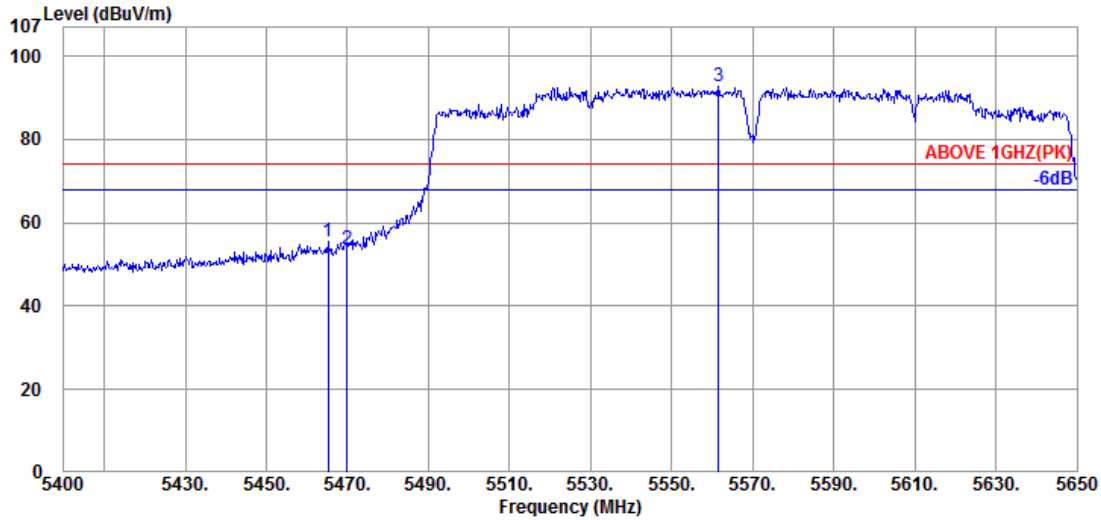

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.250	34.67	10.54	34.28	44.49	55.42	74.00	18.58	Peak
5470.000	34.67	10.54	34.28	42.91	53.84	74.00	20.16	Peak
@ 5561.500	34.60	10.63	34.30	81.85	92.78	---	---	Peak

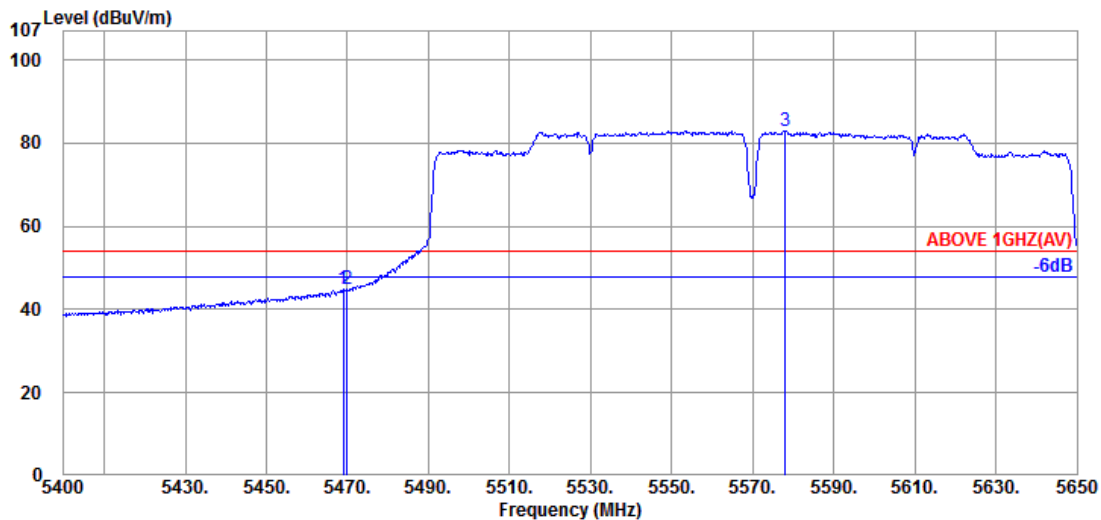


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.67	10.54	34.28	33.86	44.79	54.00	9.21	Average
5470.000	34.67	10.54	34.28	33.82	44.75	54.00	9.25	Average
@ 5578.000	34.60	10.65	34.30	71.97	82.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-2C
		Frequency	TX 5570MHz

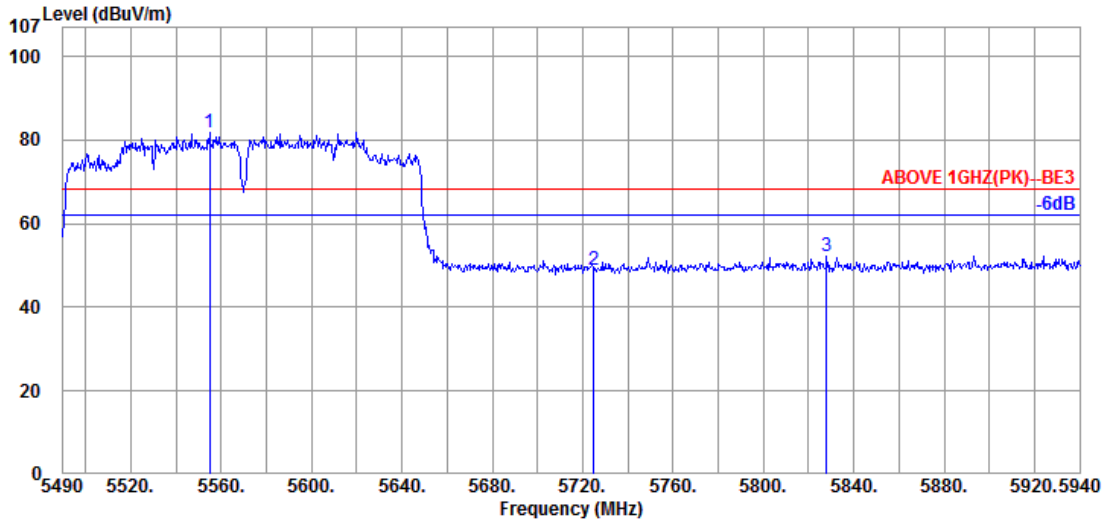

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5554.800	34.60	10.63	34.30	70.78	81.71	---	---	Peak
5724.900	34.80	10.84	34.37	37.59	48.86	68.20	19.34	Peak
5827.950	35.30	10.97	34.42	40.53	52.38	68.20	15.82	Peak

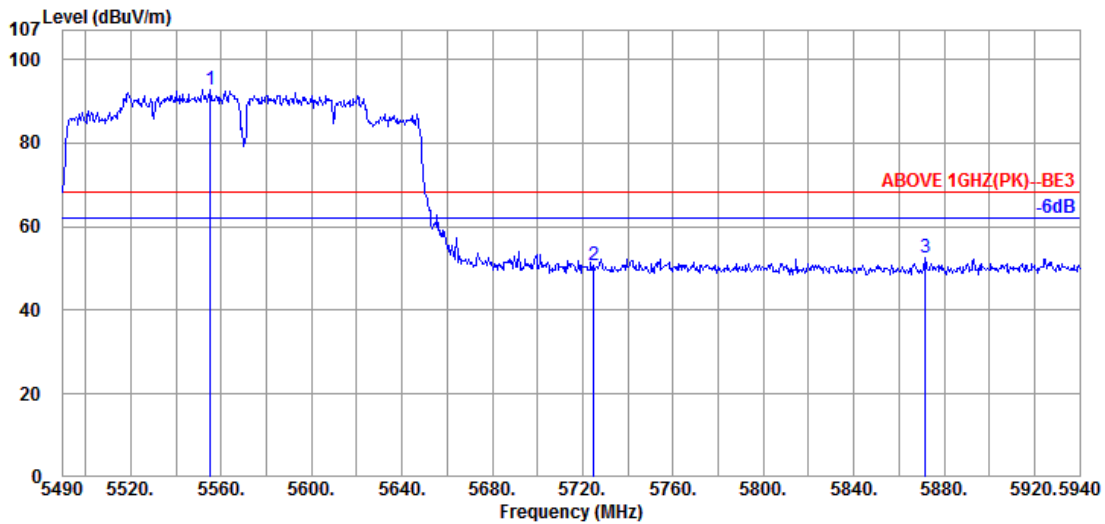


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5555.250	34.60	10.63	34.30	81.75	92.68	---	---	Peak
5724.900	34.80	10.84	34.37	39.35	50.62	68.20	17.58	Peak
5871.600	35.40	11.04	34.44	40.71	52.71	68.20	15.49	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

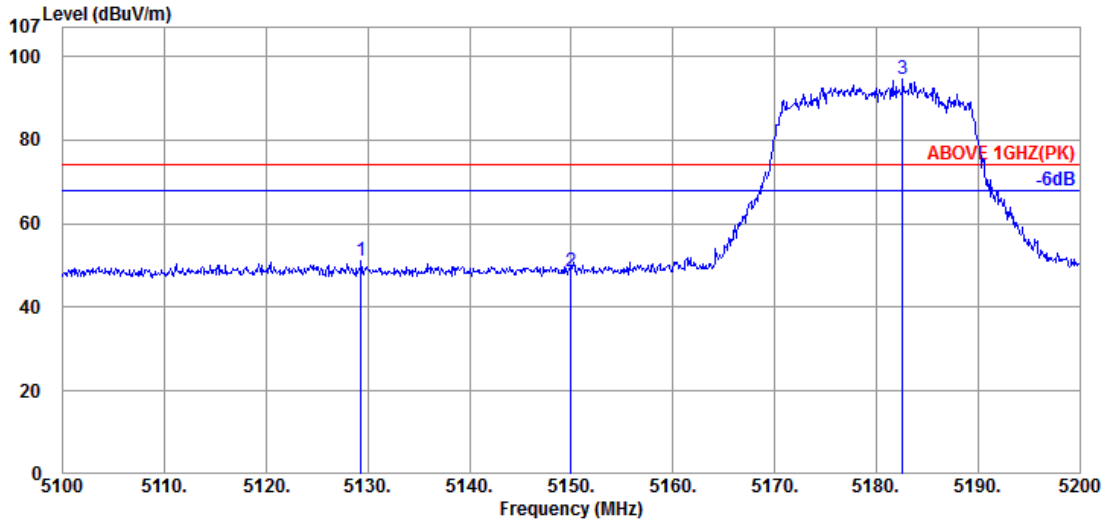

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.300	34.37	10.35	34.39	40.66	50.99	74.00	23.01	Peak
5150.000	34.40	10.36	34.38	38.28	48.66	74.00	25.34	Peak
@ 5182.600	34.47	10.38	34.37	83.97	94.45	---	---	Peak

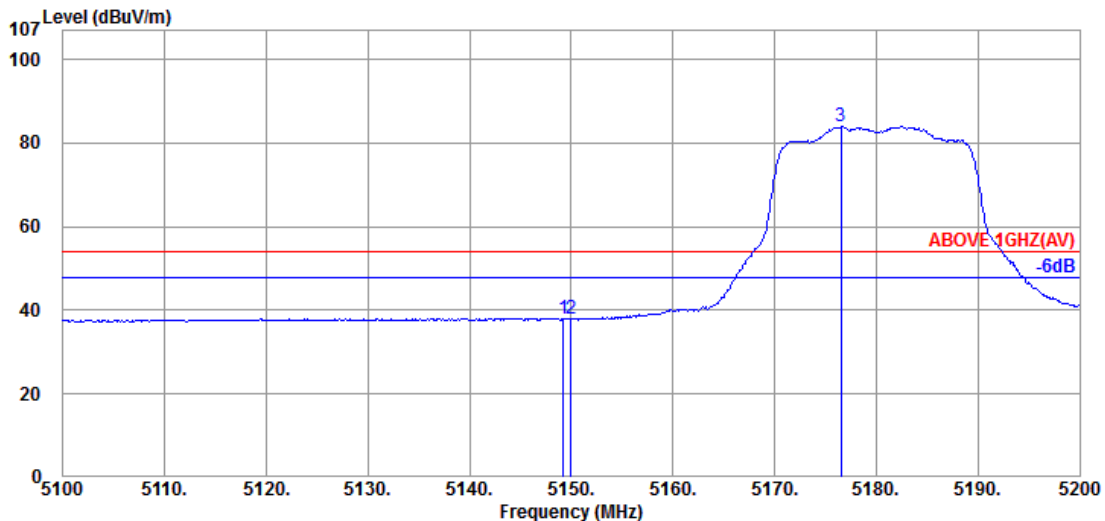


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.40	10.36	34.38	27.70	38.08	54.00	15.92	Average
5150.000	34.40	10.36	34.38	27.55	37.93	54.00	16.07	Average
@ 5176.500	34.47	10.38	34.37	73.42	83.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

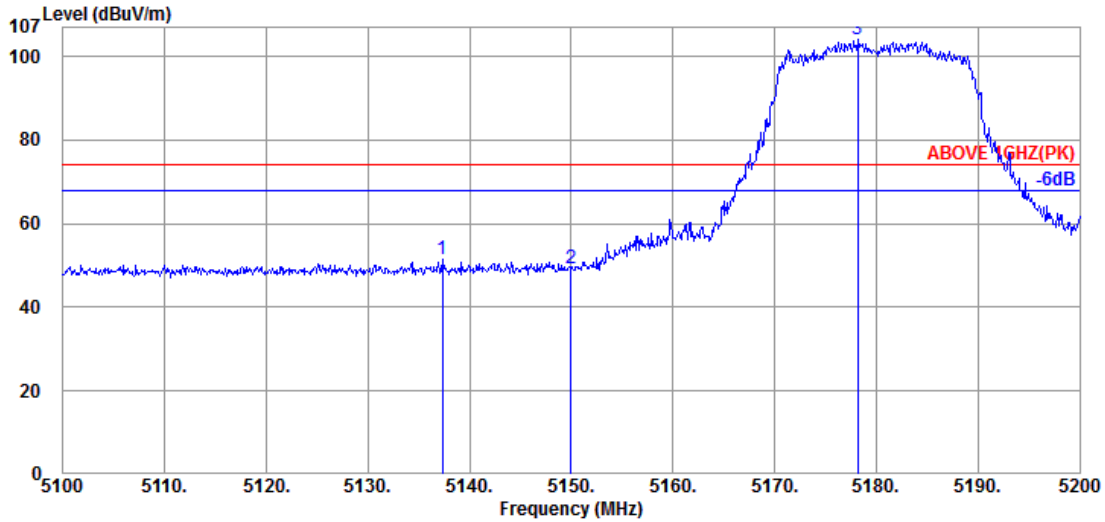

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.300	34.37	10.35	34.39	41.26	51.59	74.00	22.41	Peak
5150.000	34.40	10.36	34.38	38.93	49.31	74.00	24.69	Peak
@ 5178.200	34.47	10.38	34.37	93.50	103.98	---	---	Peak

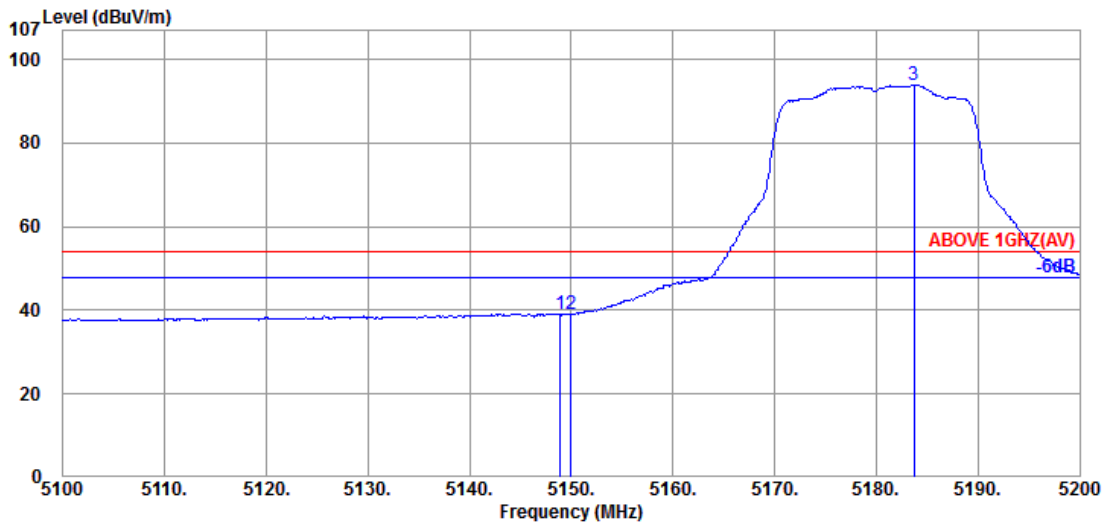


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.40	10.36	34.38	28.87	39.25	54.00	14.75	Average
5150.000	34.40	10.36	34.38	28.67	39.05	54.00	14.95	Average
@ 5183.700	34.47	10.38	34.37	83.40	93.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

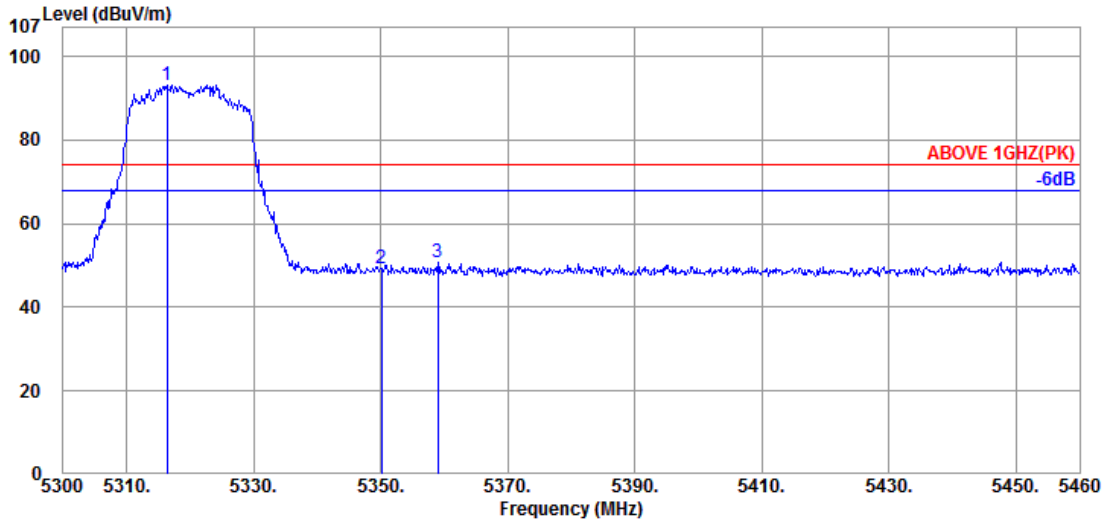

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.320	34.60	10.46	34.33	82.43	93.16	---	---	Peak
5350.080	34.60	10.48	34.31	38.55	49.32	74.00	24.68	Peak
5359.040	34.60	10.48	34.31	39.96	50.73	74.00	23.27	Peak

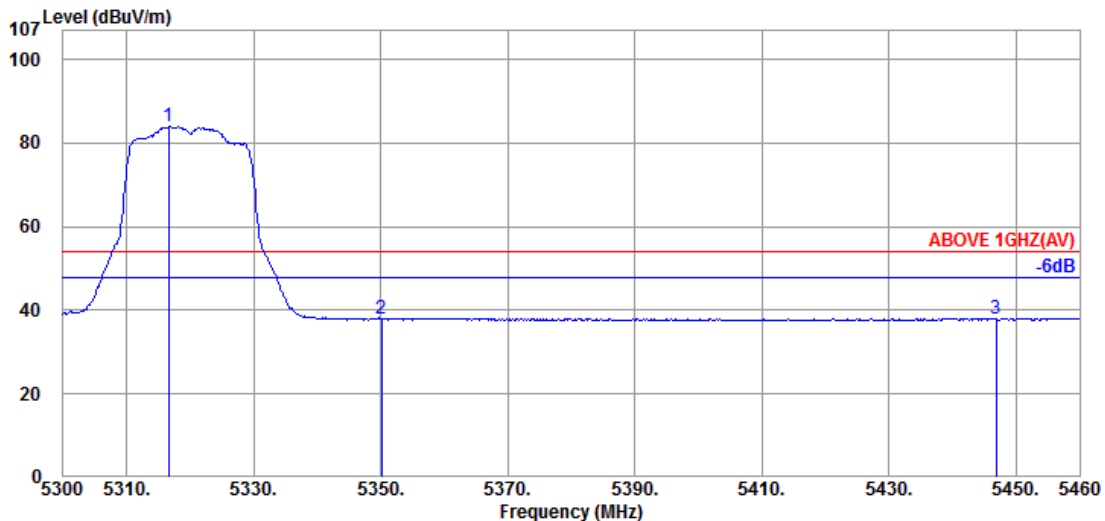


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	34.60	10.46	34.33	73.29	84.02	---	---	Average
5350.080	34.60	10.48	34.31	27.07	37.84	54.00	16.16	Average
5446.880	34.67	10.53	34.29	27.25	38.16	54.00	15.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

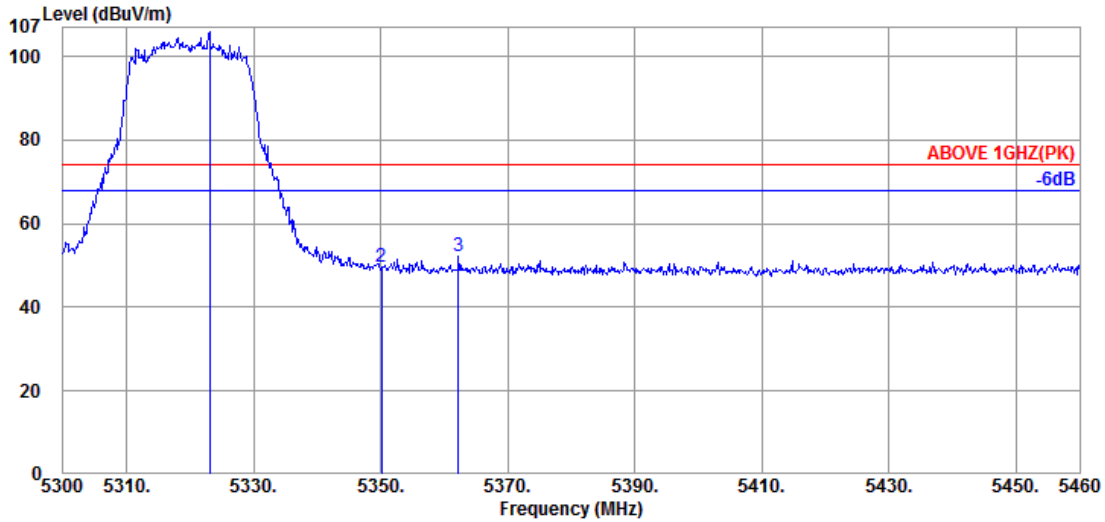

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.040	34.60	10.46	34.33	95.18	105.91	---	---	Peak
5350.080	34.60	10.48	34.31	38.94	49.71	74.00	24.29	Peak
5362.240	34.60	10.49	34.31	41.28	52.06	74.00	21.94	Peak

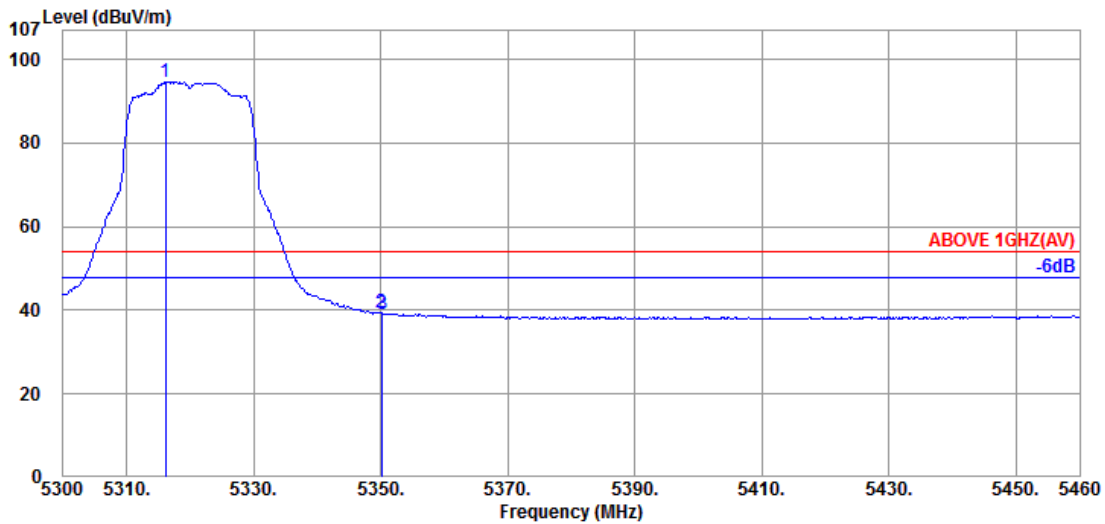


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.160	34.60	10.46	34.33	83.95	94.68	---	---	Average
5350.080	34.60	10.48	34.31	28.58	39.35	54.00	14.65	Average
5350.240	34.60	10.48	34.31	28.46	39.23	54.00	14.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

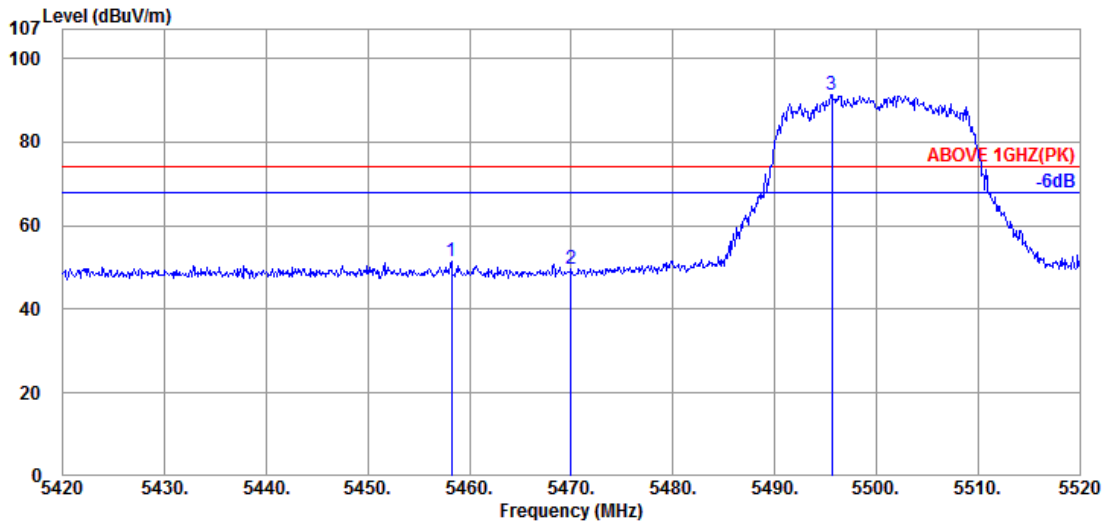

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.70	10.53	34.28	40.38	51.33	74.00	22.67	Peak
5470.000	34.67	10.54	34.28	38.68	49.61	74.00	24.39	Peak
@ 5495.600	34.60	10.55	34.27	80.59	91.47	---	---	Peak

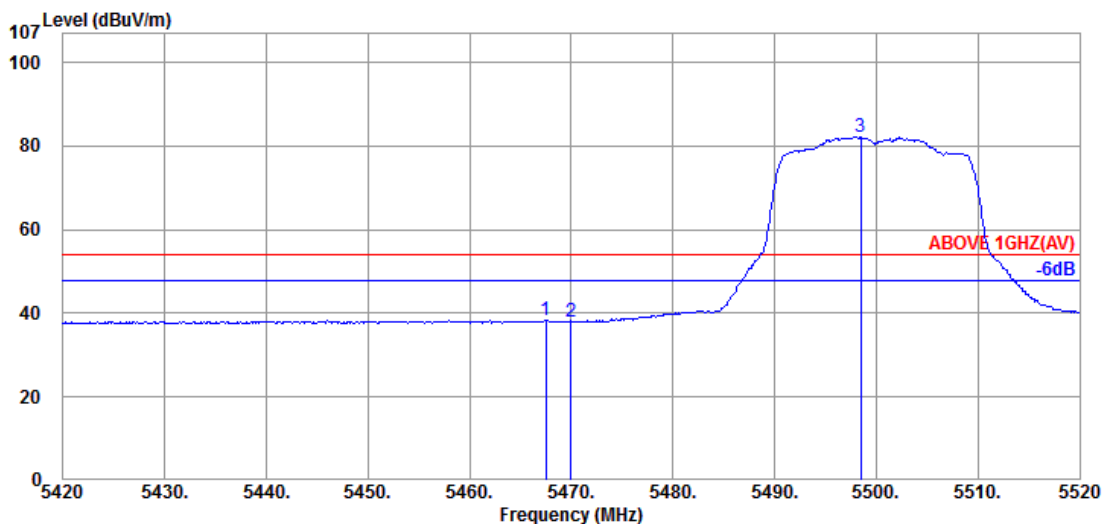


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.67	10.54	34.28	27.39	38.32	54.00	15.68	Average
5470.000	34.67	10.54	34.28	27.02	37.95	54.00	16.05	Average
@ 5498.500	34.60	10.56	34.27	71.29	82.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

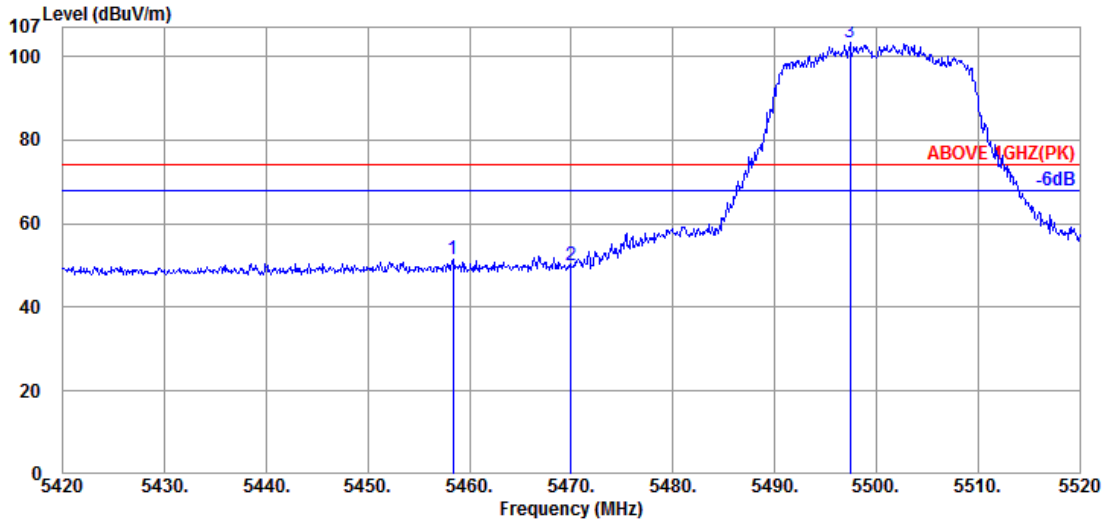

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.70	10.53	34.28	40.43	51.38	74.00	22.62	Peak
5470.000	34.67	10.54	34.28	39.21	50.14	74.00	23.86	Peak
@ 5497.400	34.60	10.56	34.27	92.48	103.37	---	---	Peak

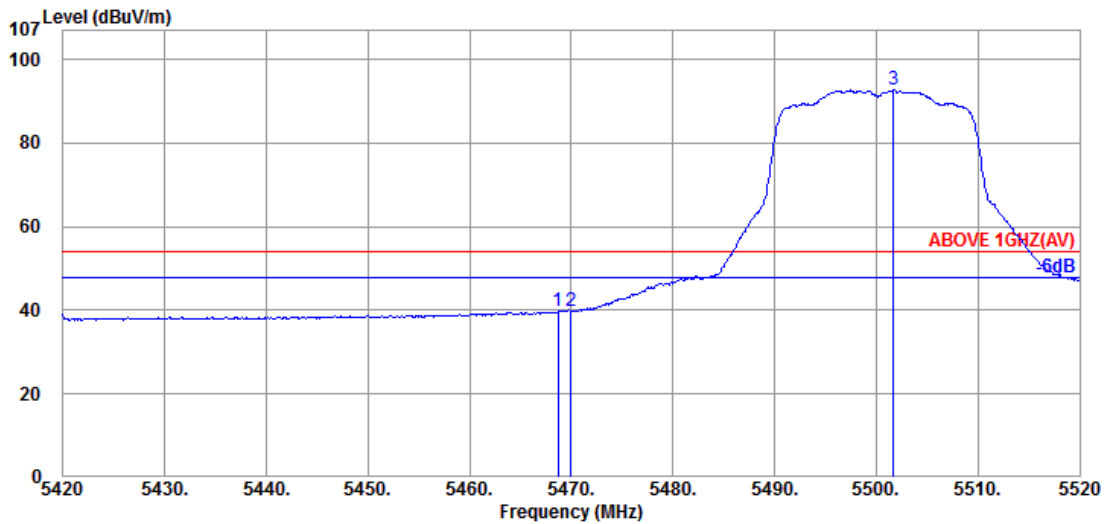


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.67	10.54	34.28	28.79	39.72	54.00	14.28	Average
5470.000	34.67	10.54	34.28	28.72	39.65	54.00	14.35	Average
@ 5501.700	34.60	10.56	34.27	81.88	92.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5700MHz

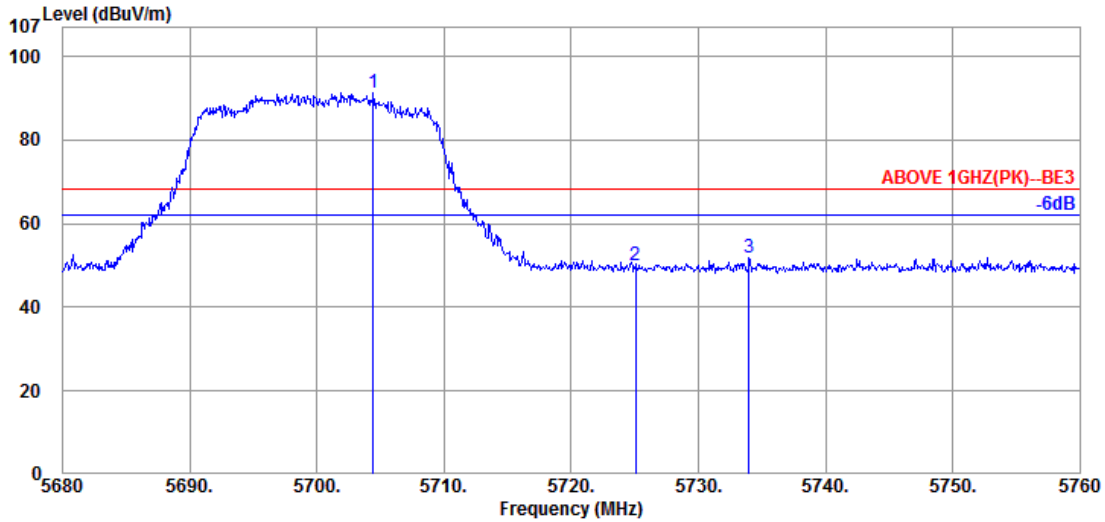

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.400	34.80	10.82	34.36	80.10	91.36	---	---	Peak
5725.040	34.80	10.84	34.37	38.79	50.06	68.20	18.14	Peak
5734.000	34.80	10.84	34.38	40.64	51.90	68.20	16.30	Peak

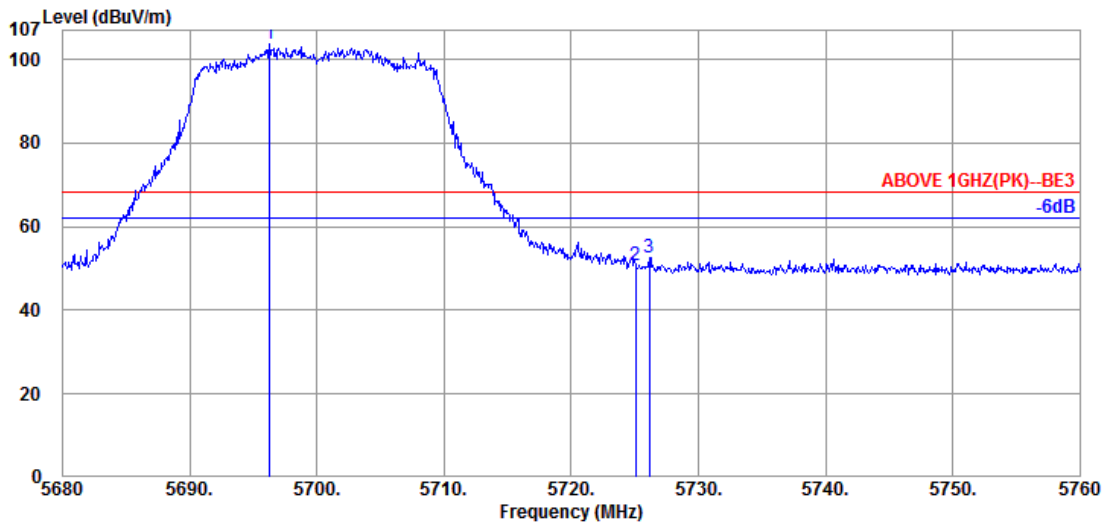


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.240	34.80	10.80	34.36	92.38	103.62	---	---	Peak
5725.040	34.80	10.84	34.37	39.66	50.93	68.20	17.27	Peak
5726.160	34.80	10.84	34.37	41.44	52.71	68.20	15.49	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

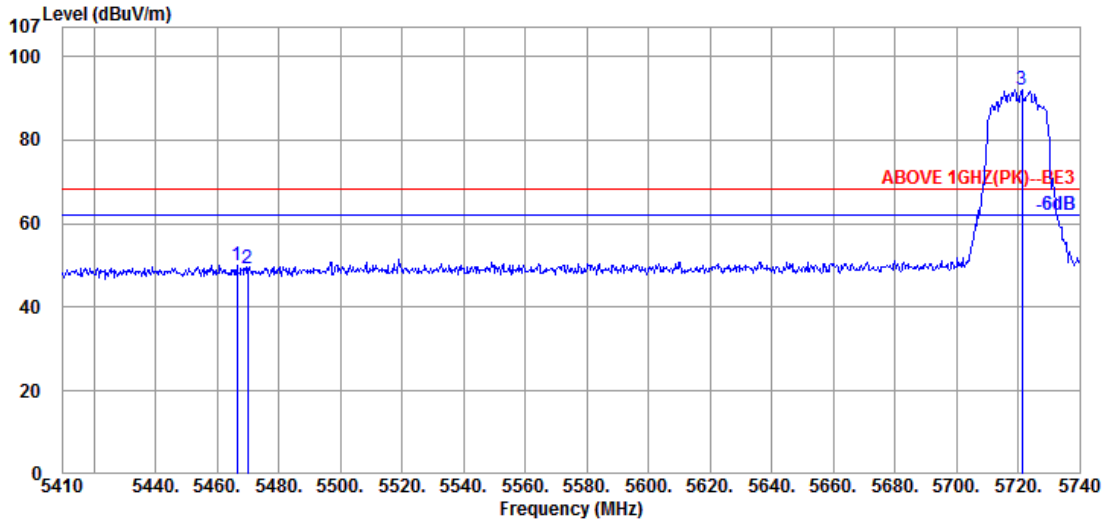

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.67	10.54	34.28	39.20	50.13	68.20	18.07	Peak
5470.060	34.67	10.54	34.28	38.22	49.15	68.20	19.05	Peak
@ 5721.190	34.80	10.84	34.37	80.87	92.14	---	---	Peak

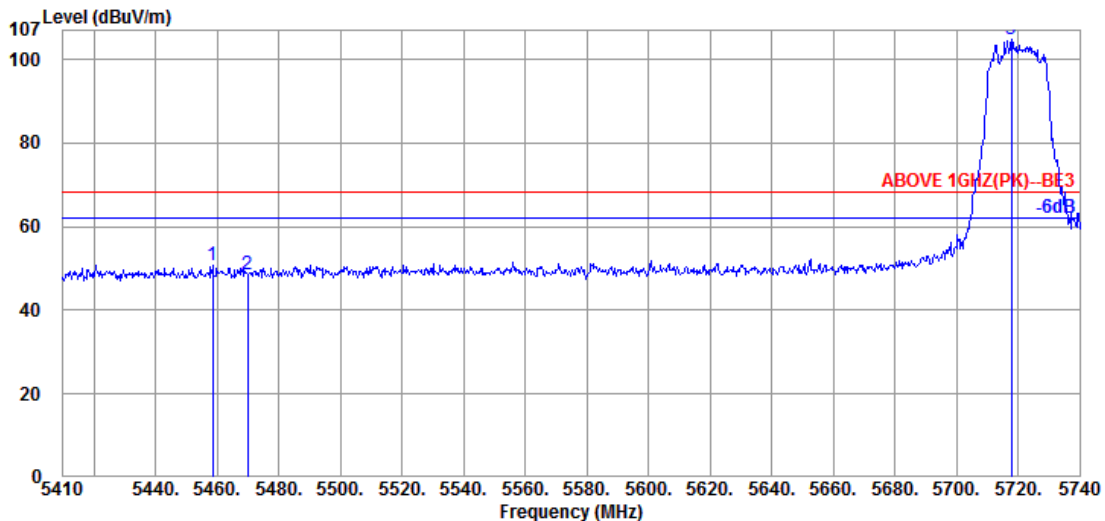


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	34.70	10.53	34.28	39.73	50.68	68.20	17.52	Peak
5470.060	34.67	10.54	34.28	37.54	48.47	68.20	19.73	Peak
@ 5717.890	34.80	10.84	34.37	93.55	104.82	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

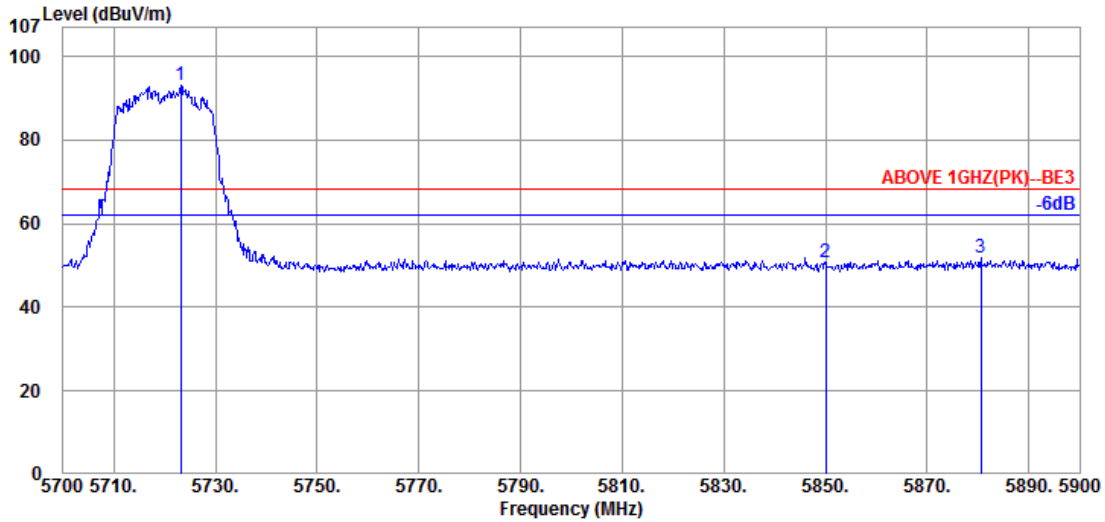

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.200	34.80	10.84	34.37	81.76	93.03	---	---	Peak
5850.000	35.40	10.99	34.43	38.66	50.62	68.20	17.58	Peak
5880.600	35.40	11.04	34.45	39.72	51.71	68.20	16.49	Peak

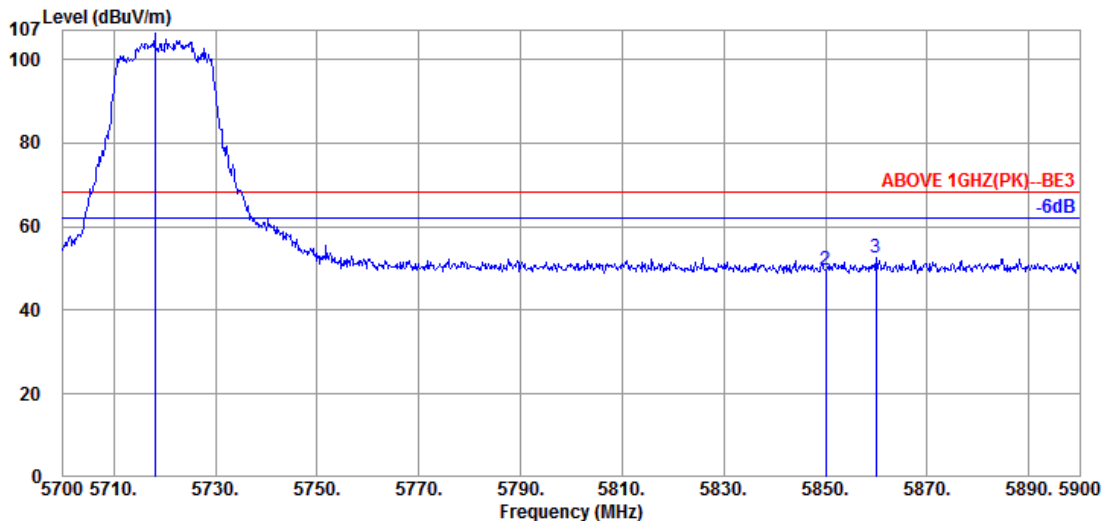


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.000	34.80	10.84	34.37	95.16	106.43	---	---	Peak
5850.000	35.40	10.99	34.43	37.75	49.71	68.20	18.49	Peak
5860.000	35.40	11.02	34.44	40.63	52.61	68.20	15.59	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

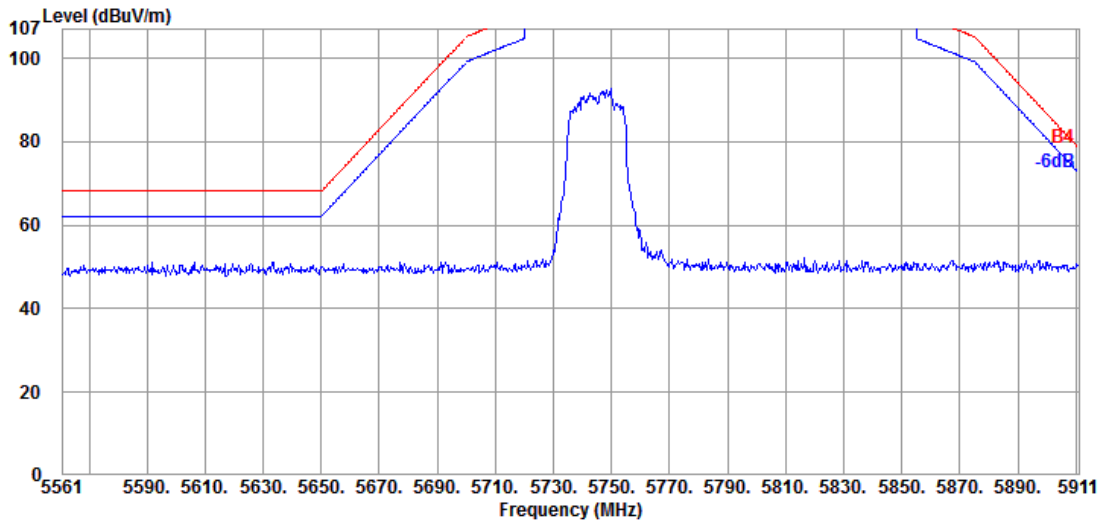


Antenna at Vertical Polarization

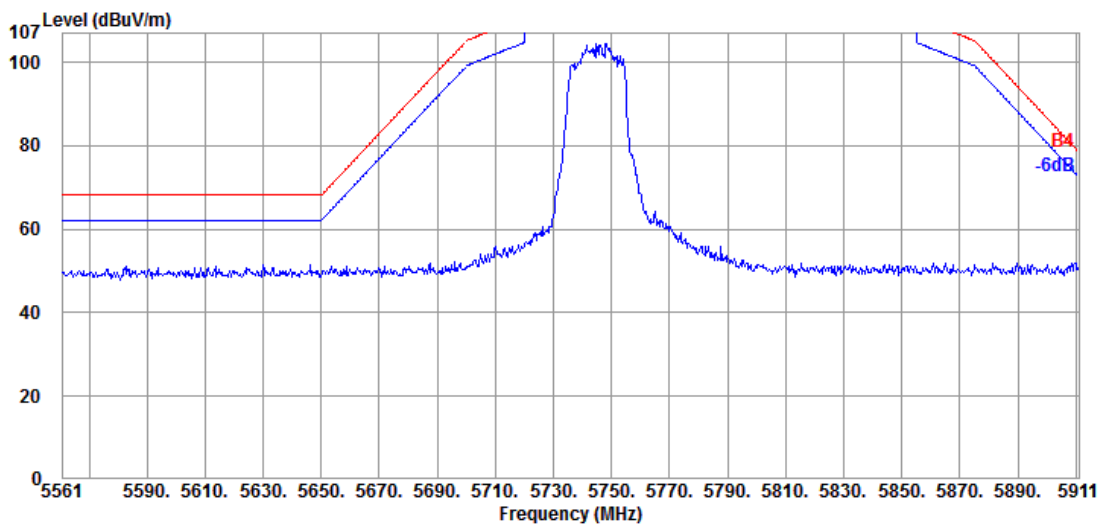


Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

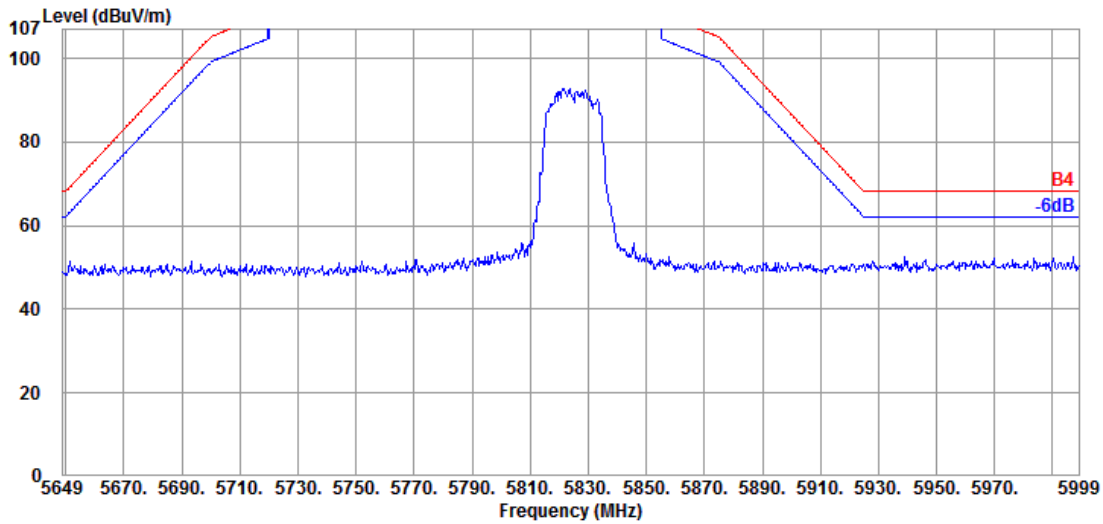

Antenna at Vertical Polarization

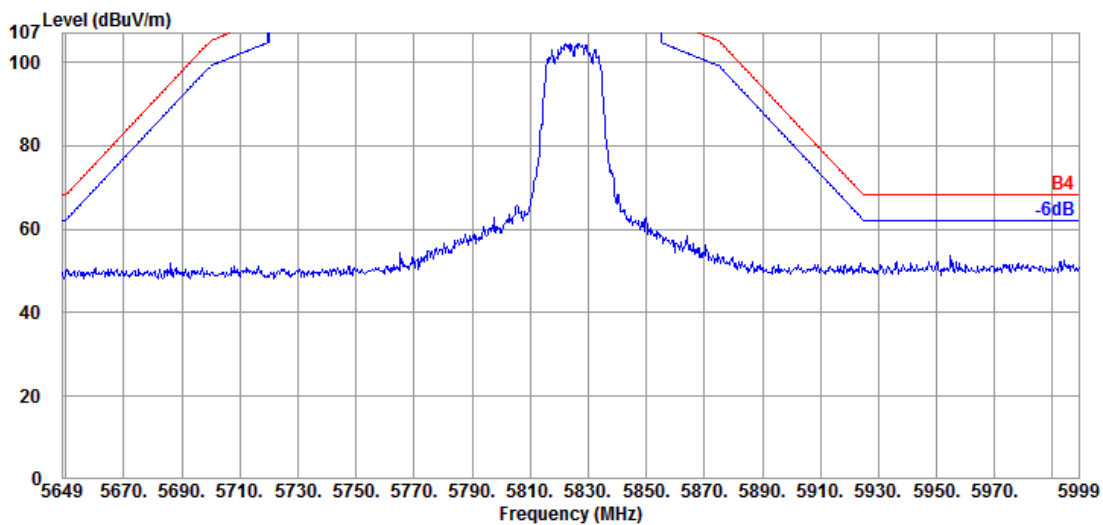


Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

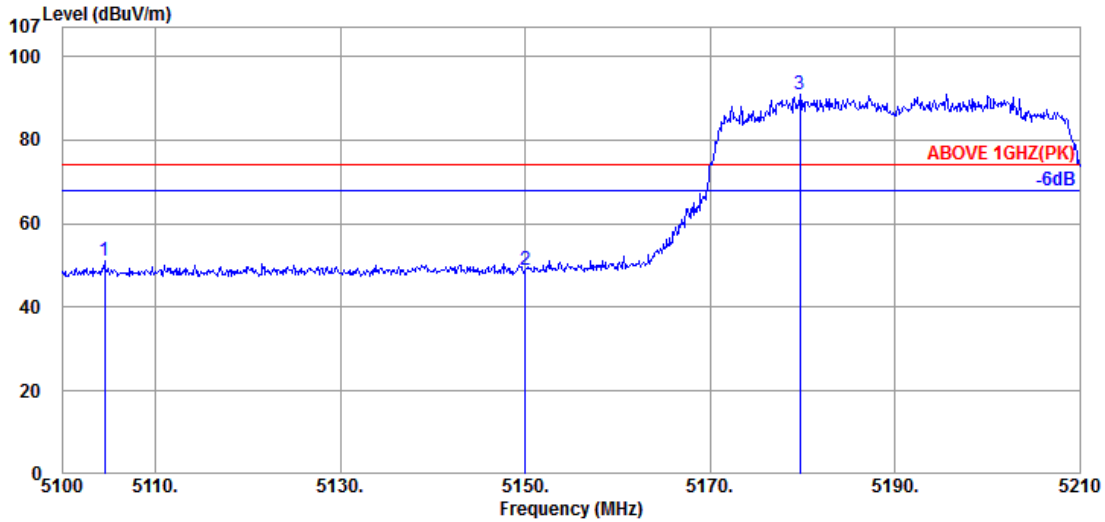

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.510	34.30	10.34	34.40	41.03	51.27	74.00	22.73	Peak
5150.050	34.40	10.36	34.38	38.45	48.83	74.00	25.17	Peak
@ 5179.750	34.47	10.38	34.37	80.40	90.88	---	---	Peak

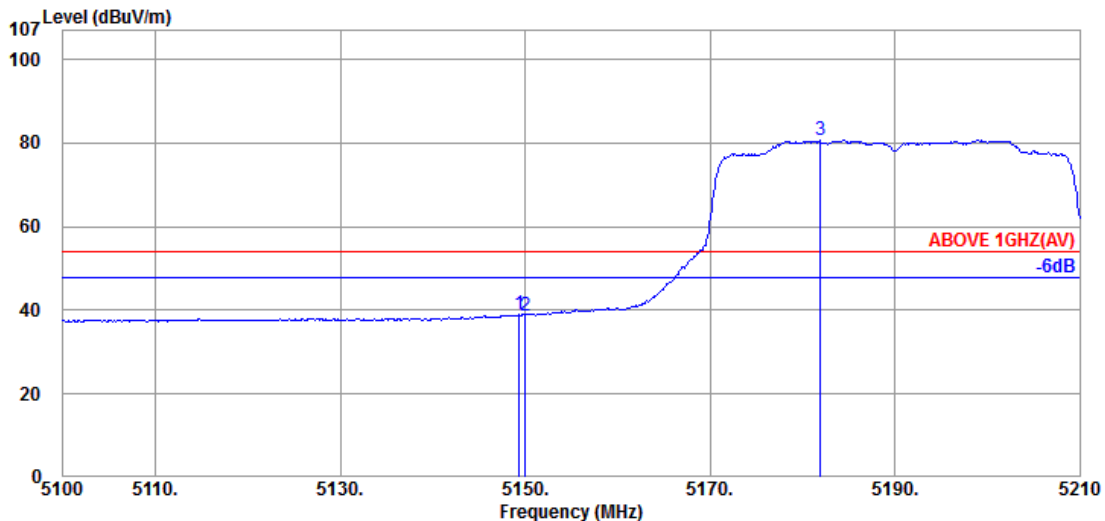


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.40	10.36	34.38	28.64	39.02	54.00	14.98	Average
5150.050	34.40	10.36	34.38	28.39	38.77	54.00	15.23	Average
@ 5181.950	34.47	10.38	34.37	70.17	80.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

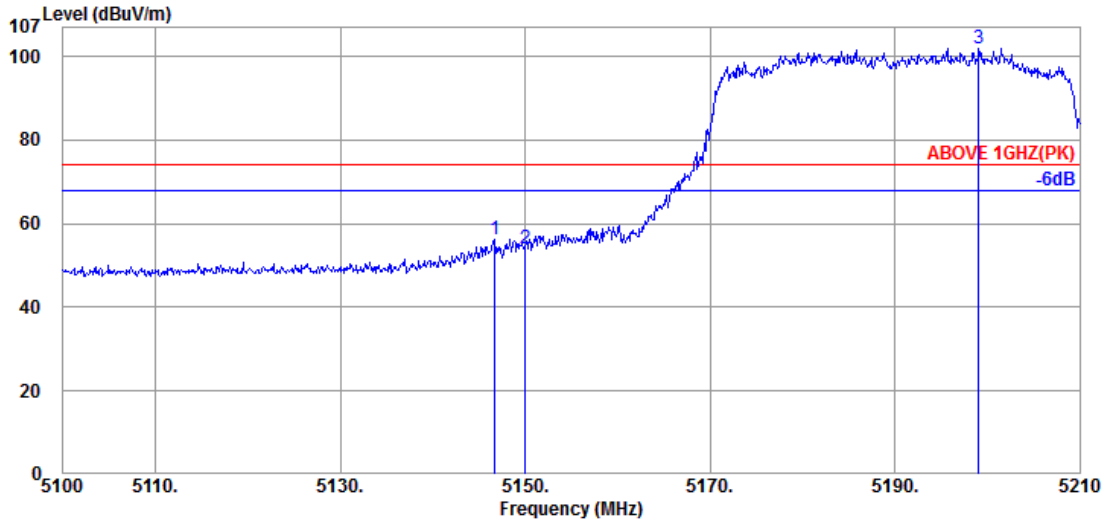

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.750	34.40	10.36	34.38	45.87	56.25	74.00	17.75	Peak
5150.050	34.40	10.36	34.38	43.70	54.08	74.00	19.92	Peak
@ 5199.110	34.50	10.39	34.36	91.43	101.96	---	---	Peak

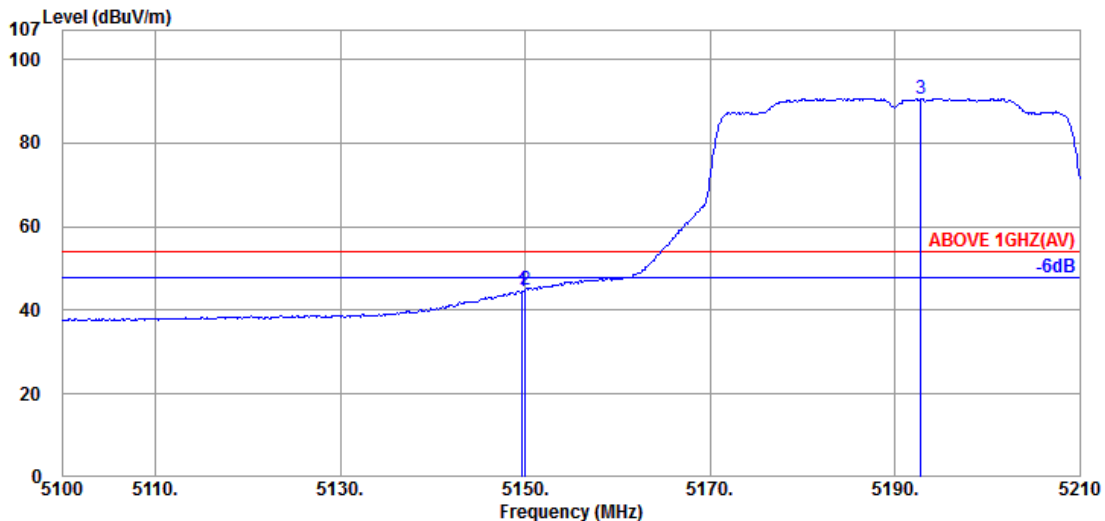


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.40	10.36	34.38	34.20	44.58	54.00	9.42	Average
5150.050	34.40	10.36	34.38	34.63	45.01	54.00	8.99	Average
@ 5192.840	34.50	10.39	34.36	80.11	90.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

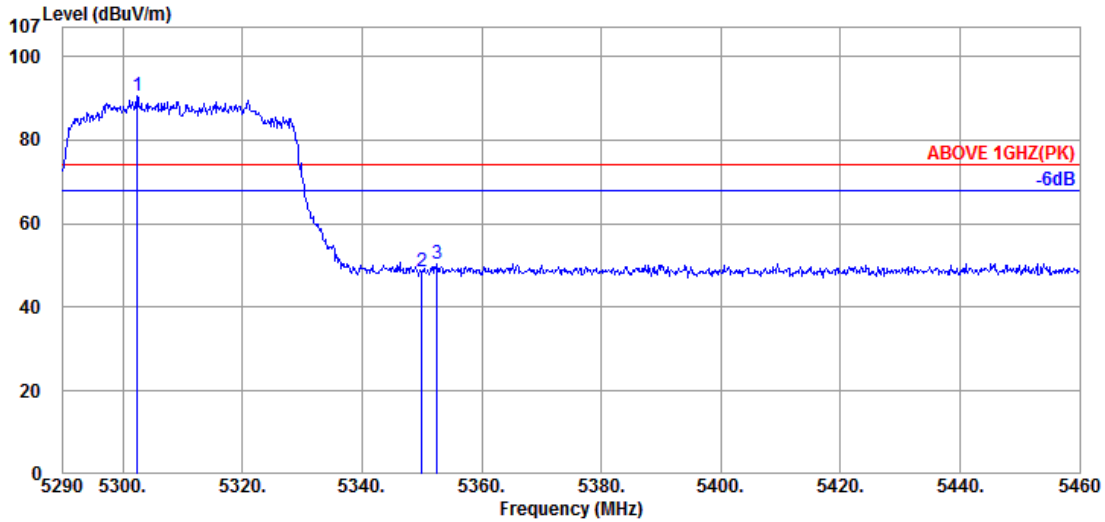

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.410	34.60	10.45	34.33	79.90	90.62	---	---	Peak
5350.010	34.60	10.48	34.31	37.81	48.58	74.00	25.42	Peak
5352.560	34.60	10.48	34.31	39.73	50.50	74.00	23.50	Peak

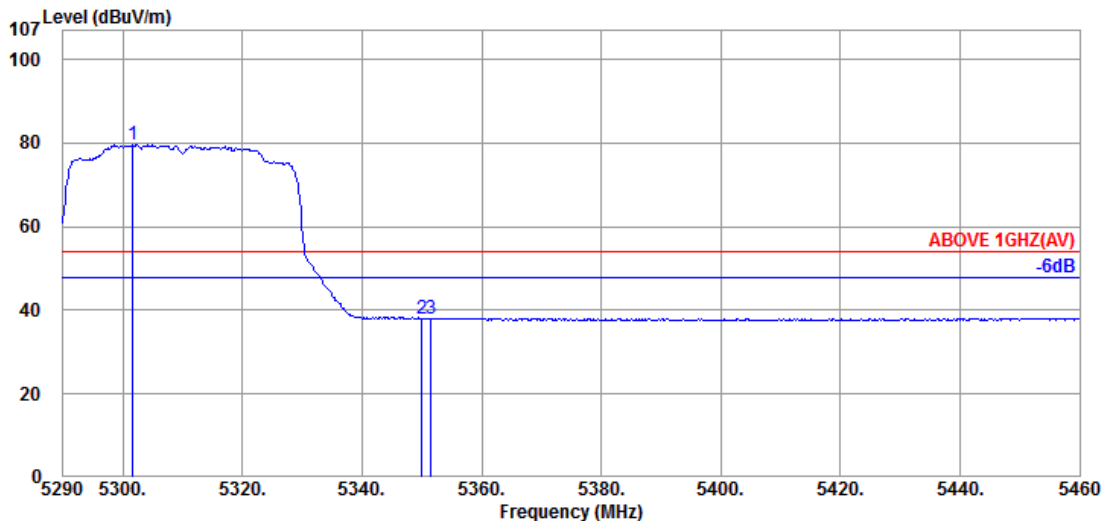


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.730	34.60	10.45	34.33	68.81	79.53	---	---	Average
5350.010	34.60	10.48	34.31	27.34	38.11	54.00	15.89	Average
5351.540	34.60	10.48	34.31	27.39	38.16	54.00	15.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

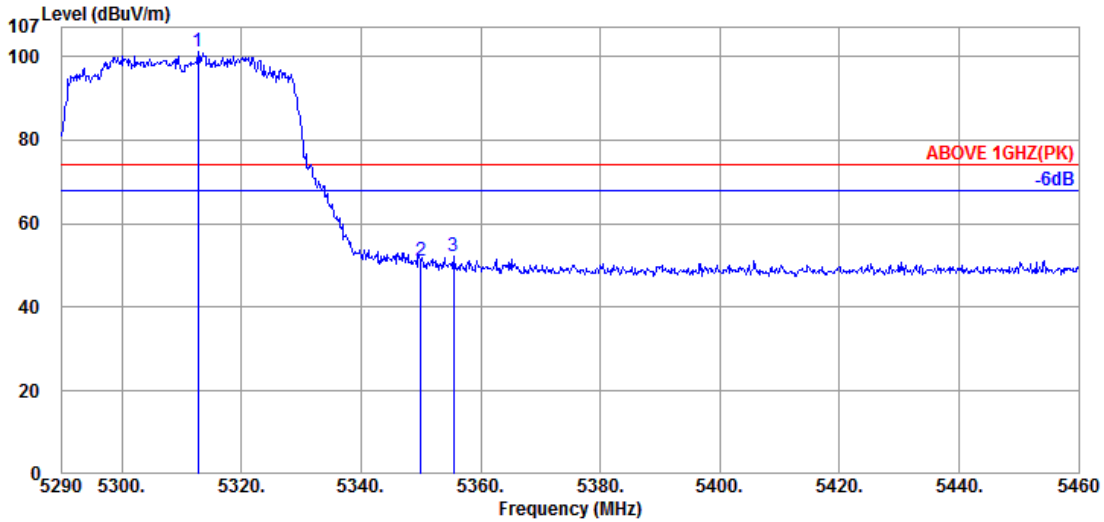

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.780	34.60	10.46	34.33	90.28	101.01	---	---	Peak
5350.010	34.60	10.48	34.31	40.48	51.25	74.00	22.75	Peak
5355.450	34.60	10.48	34.31	41.52	52.29	74.00	21.71	Peak

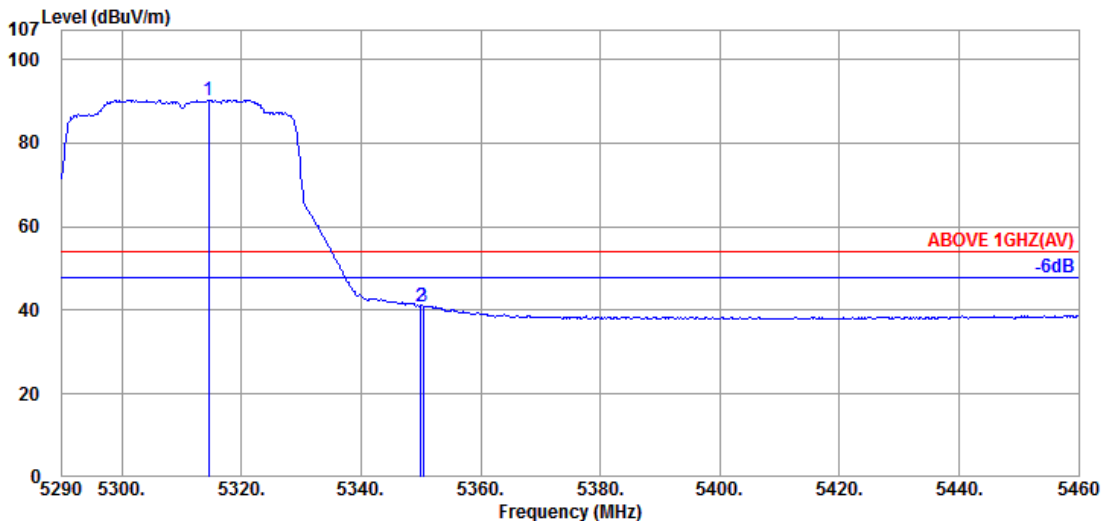


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.480	34.60	10.46	34.33	79.53	90.26	---	---	Average
5350.010	34.60	10.48	34.31	30.23	41.00	54.00	13.00	Average
5350.350	34.60	10.48	34.31	30.27	41.04	54.00	12.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

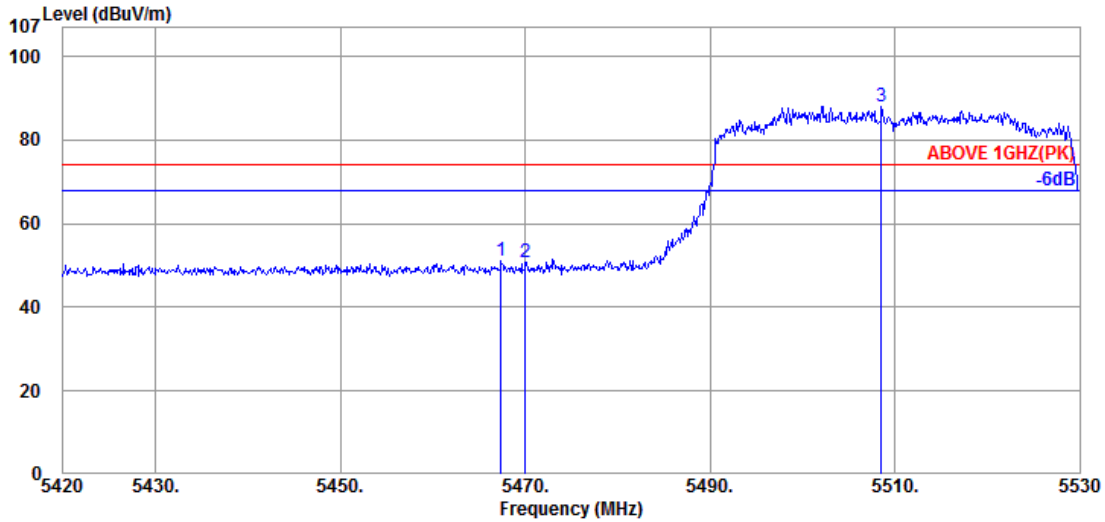

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.410	34.67	10.54	34.28	40.30	51.23	74.00	22.77	Peak
5470.050	34.67	10.54	34.28	39.98	50.91	74.00	23.09	Peak
@ 5508.550	34.60	10.56	34.28	77.27	88.15	---	---	Peak

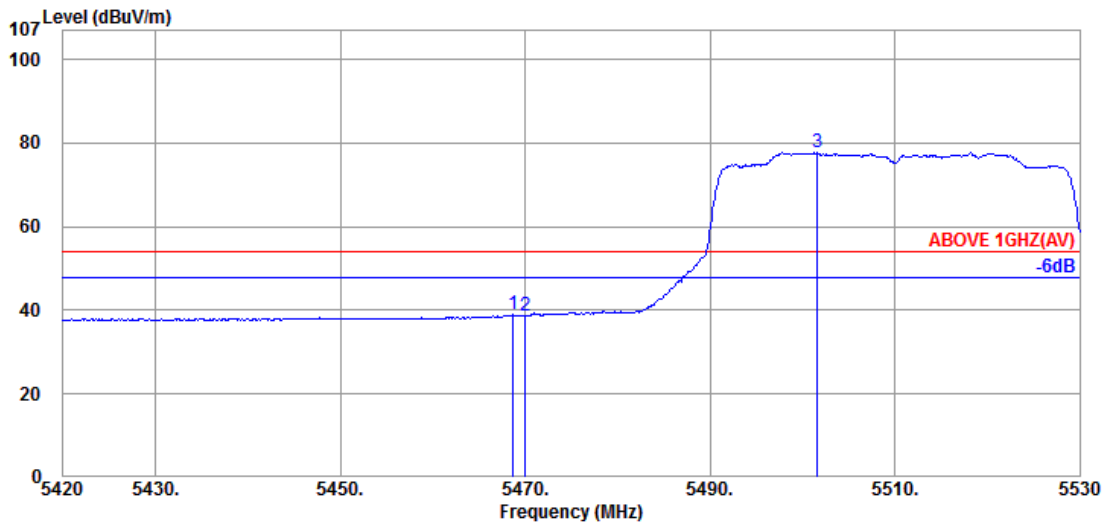


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	34.67	10.54	34.28	27.97	38.90	54.00	15.10	Average
5470.050	34.67	10.54	34.28	27.73	38.66	54.00	15.34	Average
@ 5501.620	34.60	10.56	34.27	66.82	77.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

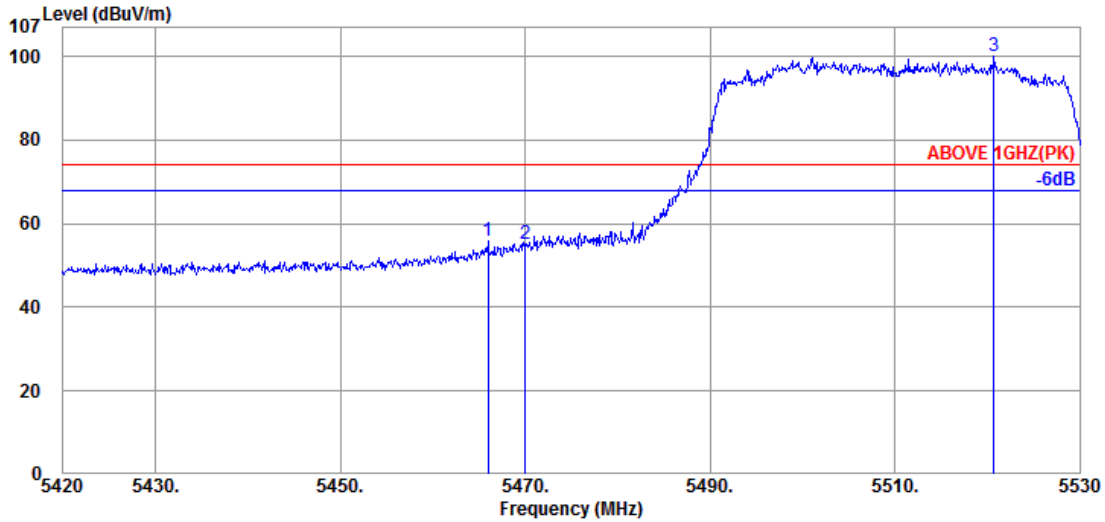

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.980	34.67	10.54	34.28	44.89	55.82	74.00	18.18	Peak
5470.050	34.67	10.54	34.28	44.17	55.10	74.00	18.90	Peak
@ 5520.760	34.60	10.58	34.28	89.34	100.24	---	---	Peak

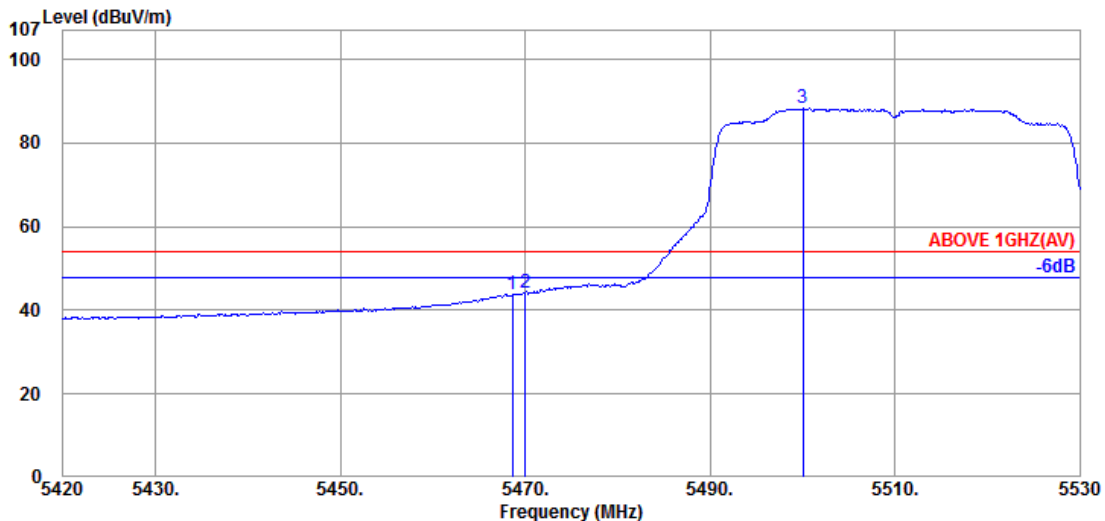


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.620	34.67	10.54	34.28	33.07	44.00	54.00	10.00	Average
5470.050	34.67	10.54	34.28	33.25	44.18	54.00	9.82	Average
@ 5500.080	34.60	10.56	34.27	77.35	88.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

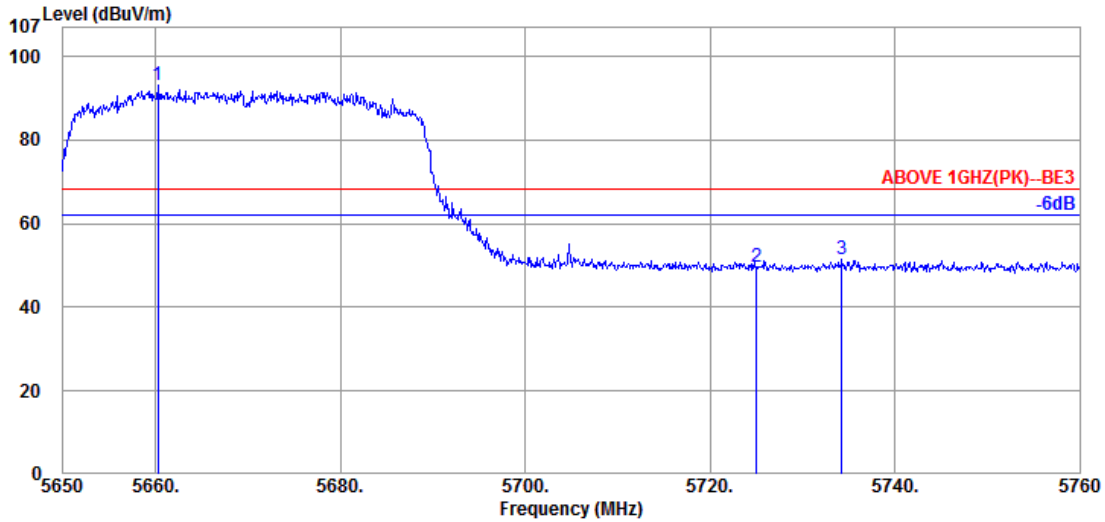

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.230	34.67	10.76	34.35	82.12	93.20	---	---	Peak
5725.020	34.80	10.84	34.37	38.24	49.51	68.20	18.69	Peak
5734.260	34.80	10.84	34.38	40.28	51.54	68.20	16.66	Peak

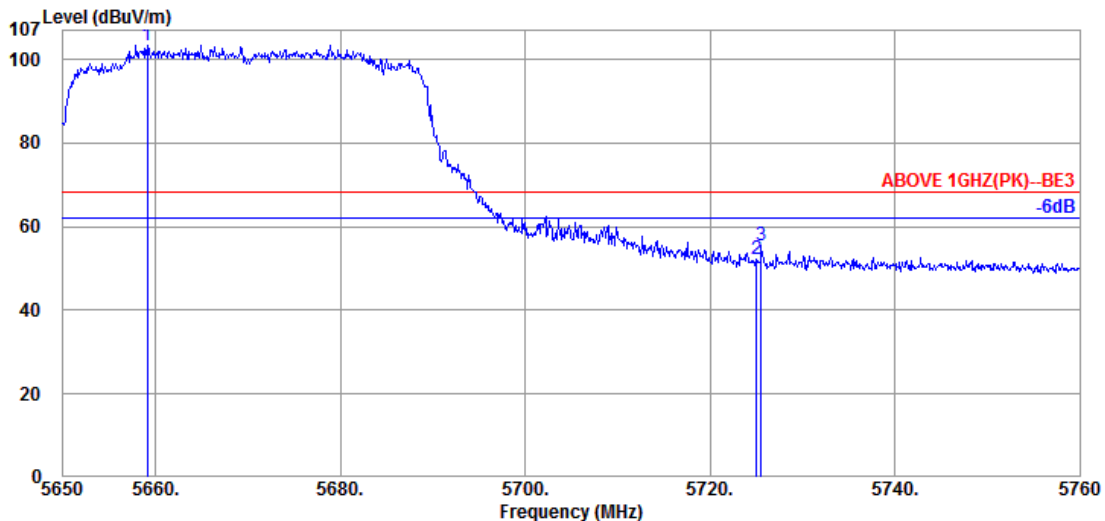


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.130	34.67	10.76	34.35	92.39	103.47	---	---	Peak
5725.020	34.80	10.84	34.37	41.07	52.34	68.20	15.86	Peak
5725.570	34.80	10.84	34.37	44.39	55.66	68.20	12.54	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

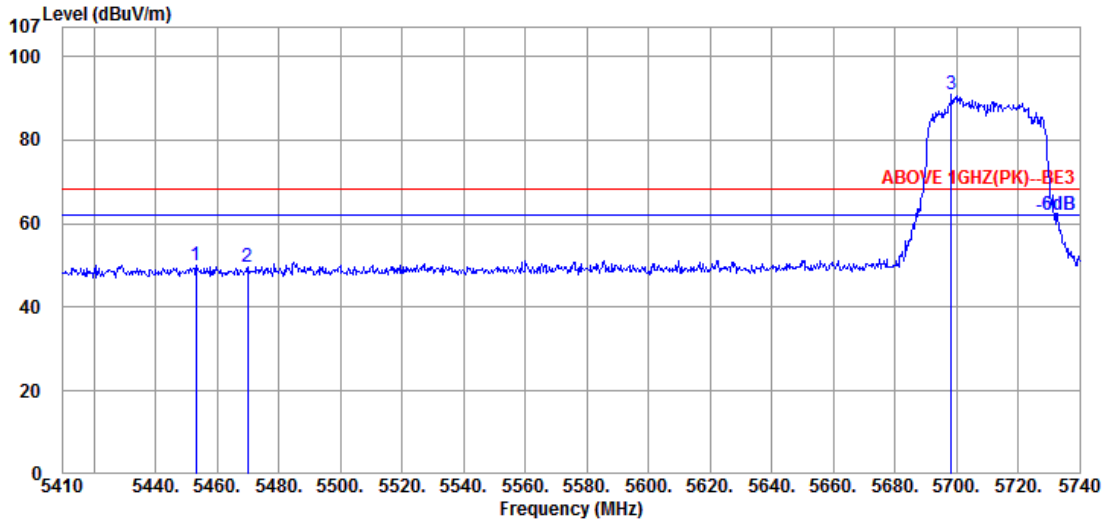

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.230	34.70	10.53	34.28	39.15	50.10	68.20	18.10	Peak
5470.060	34.67	10.54	34.28	38.57	49.50	68.20	18.70	Peak
@ 5698.420	34.80	10.80	34.36	79.71	90.95	---	---	Peak

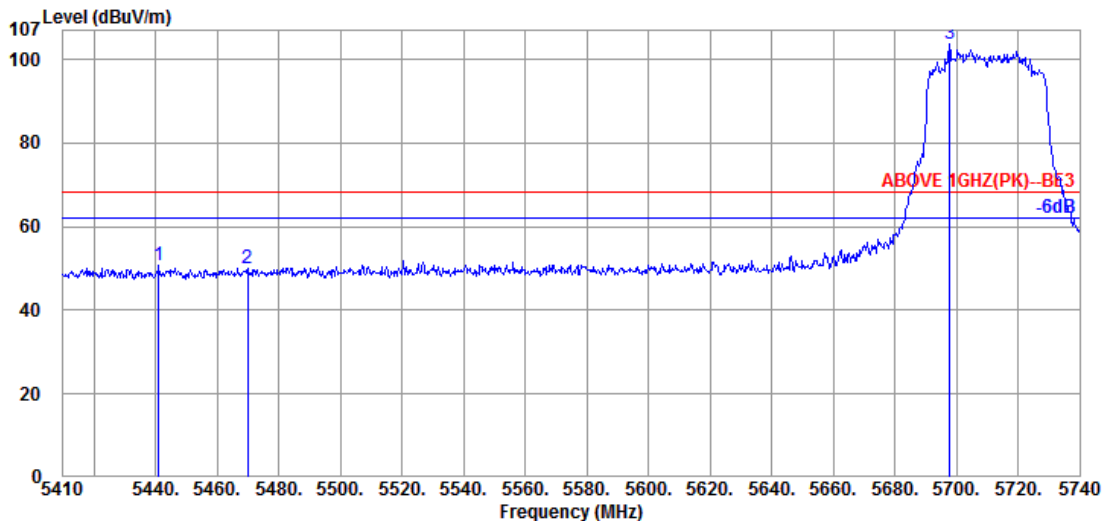


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.020	34.67	10.52	34.29	40.00	50.90	68.20	17.30	Peak
5470.060	34.67	10.54	34.28	38.96	49.89	68.20	18.31	Peak
@ 5697.760	34.80	10.80	34.36	92.29	103.53	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

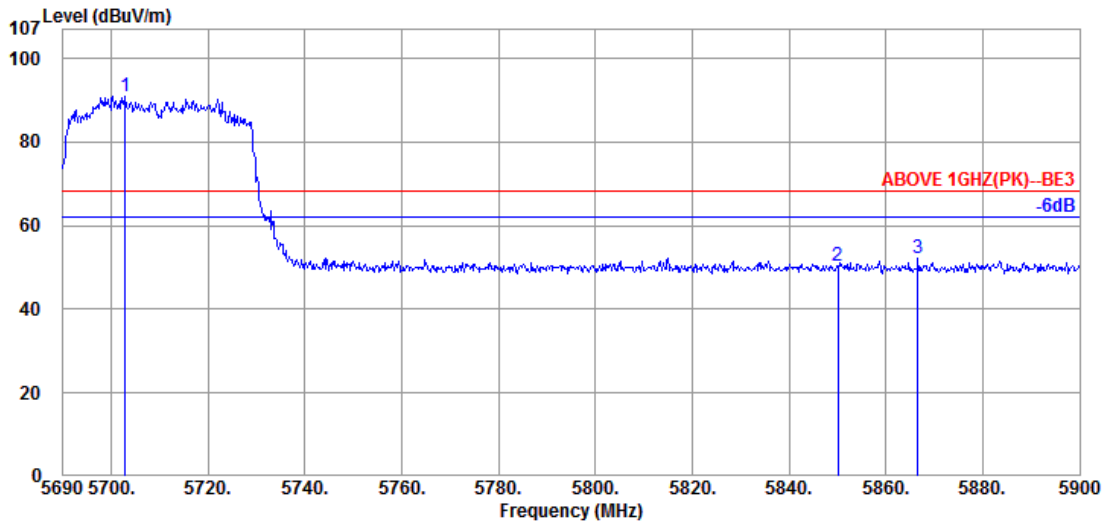

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.810	34.80	10.82	34.36	79.79	91.05	---	---	Peak
5850.020	35.40	10.99	34.43	38.45	50.41	68.20	17.79	Peak
5866.610	35.40	11.02	34.44	40.35	52.33	68.20	15.87	Peak

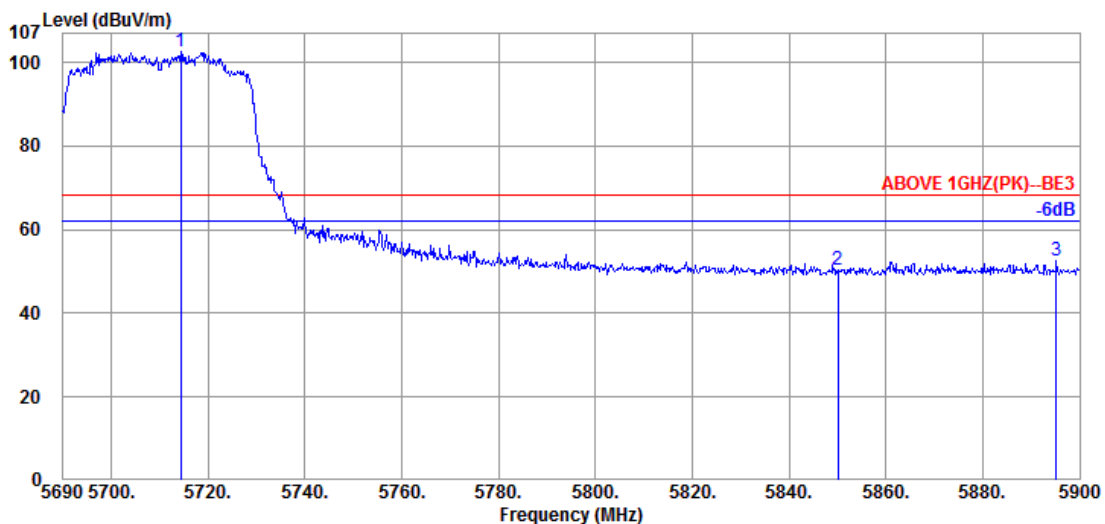


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.360	34.80	10.82	34.37	91.20	102.45	---	---	Peak
5850.020	35.40	10.99	34.43	38.34	50.30	68.20	17.90	Peak
5895.170	35.40	11.06	34.45	40.57	52.58	68.20	15.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

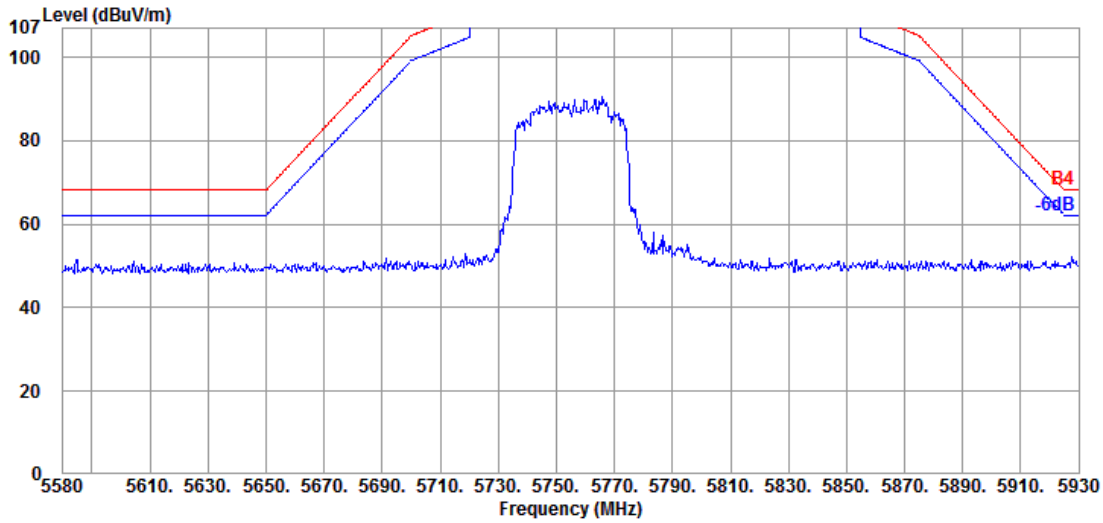


Antenna at Vertical Polarization

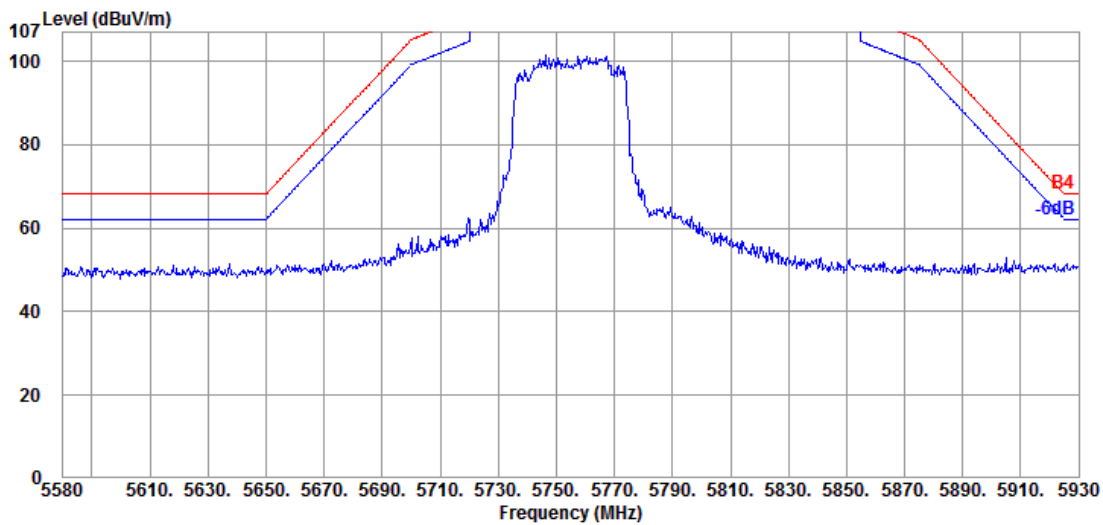


Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

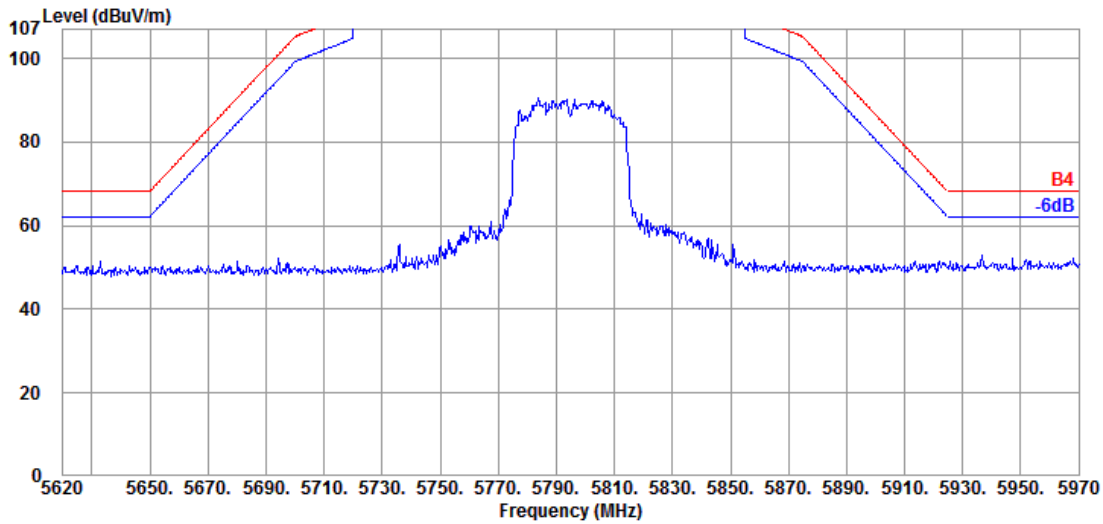

Antenna at Vertical Polarization

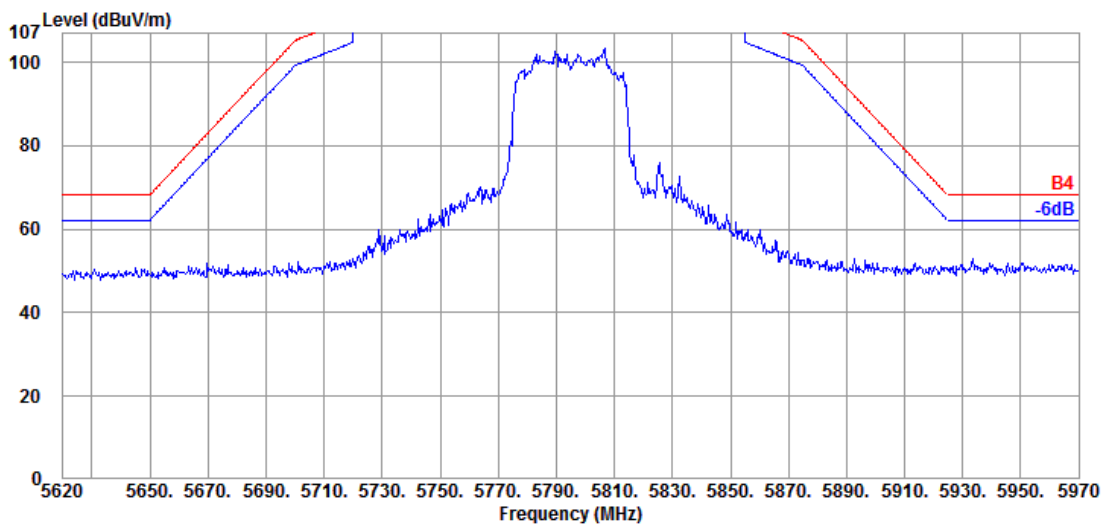


Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

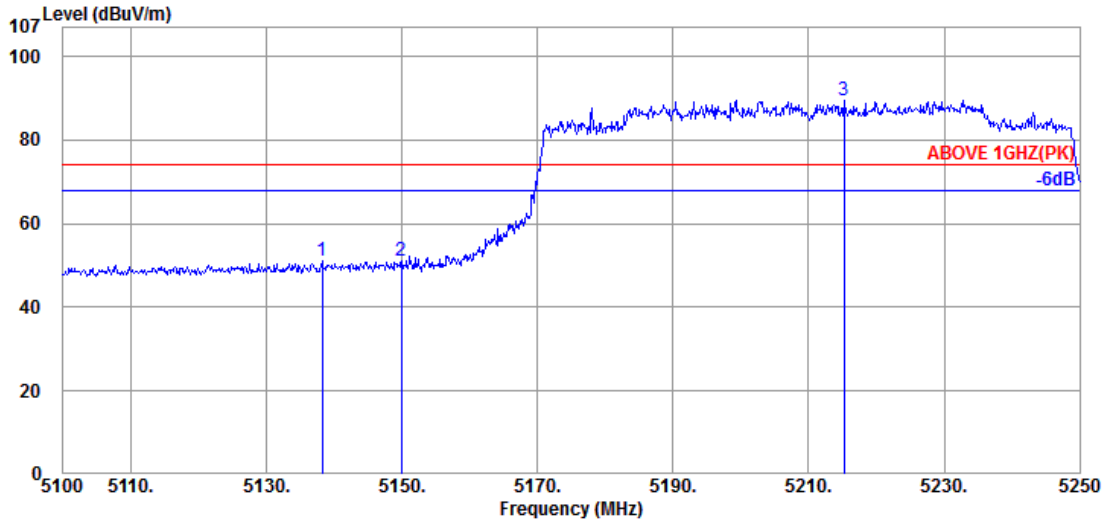

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.250	34.37	10.35	34.39	40.76	51.09	74.00	22.91	Peak
5149.950	34.40	10.36	34.38	40.57	50.95	74.00	23.05	Peak
@ 5215.200	34.50	10.40	34.36	79.10	89.64	---	---	Peak

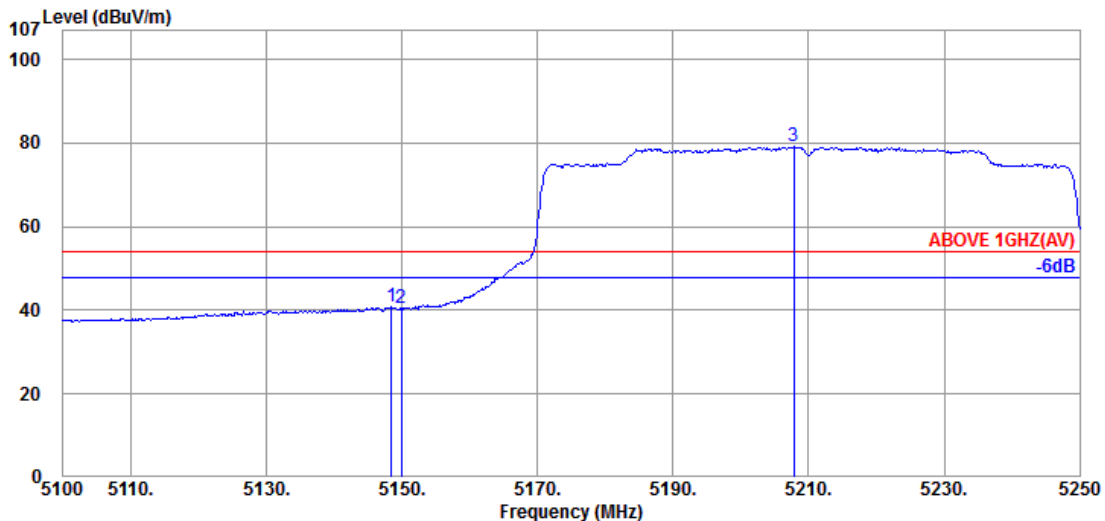


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.450	34.40	10.36	34.38	30.51	40.89	54.00	13.11	Average
5149.950	34.40	10.36	34.38	30.08	40.46	54.00	13.54	Average
@ 5207.850	34.50	10.40	34.36	68.55	79.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

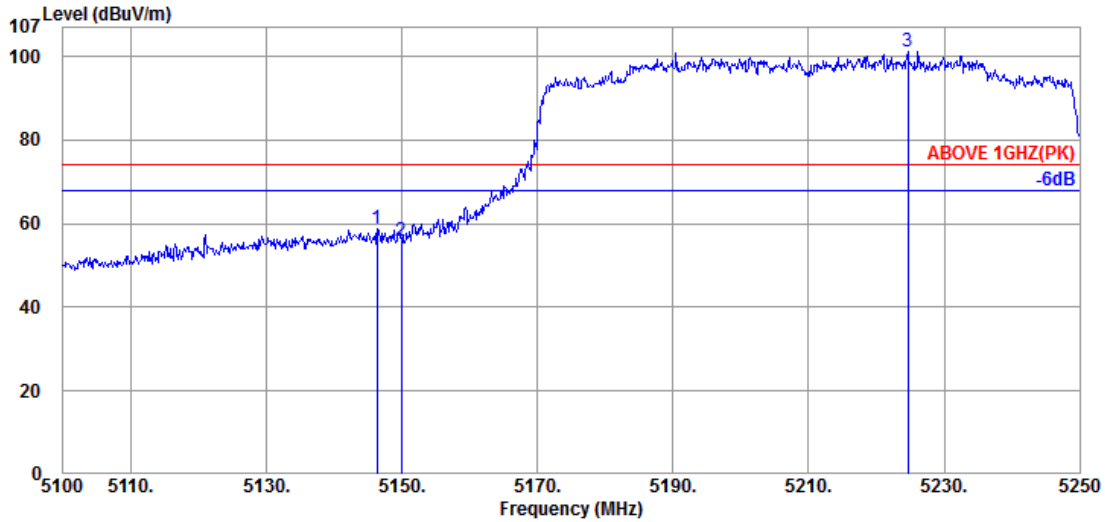

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.350	34.40	10.36	34.38	48.55	58.93	74.00	15.07	Peak
5149.950	34.40	10.36	34.38	45.57	55.95	74.00	18.05	Peak
@ 5224.650	34.50	10.41	34.35	90.54	101.10	---	---	Peak

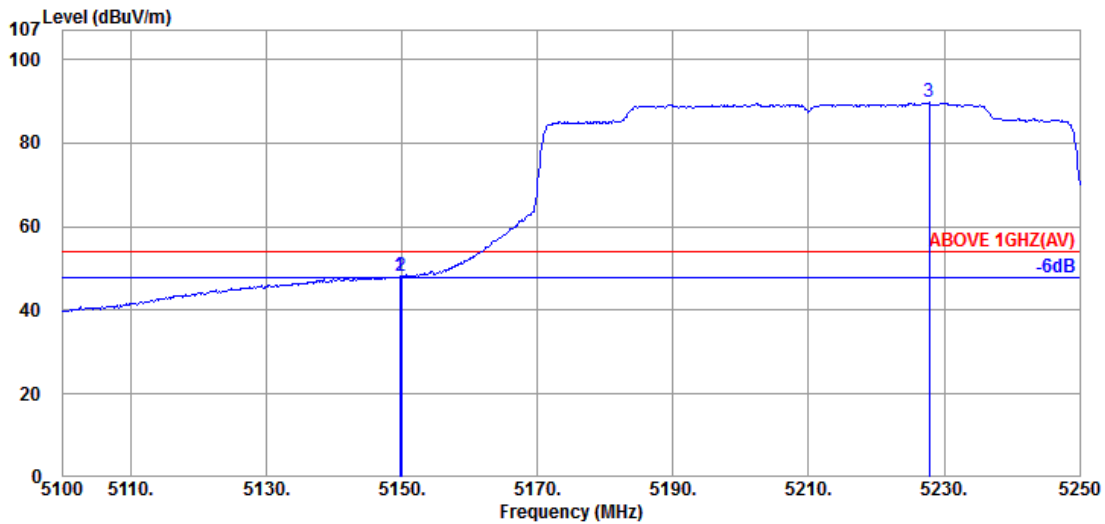


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.40	10.36	34.38	37.88	48.26	54.00	5.74	Average
5149.950	34.40	10.36	34.38	37.94	48.32	54.00	5.68	Average
@ 5227.800	34.50	10.41	34.35	79.13	89.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

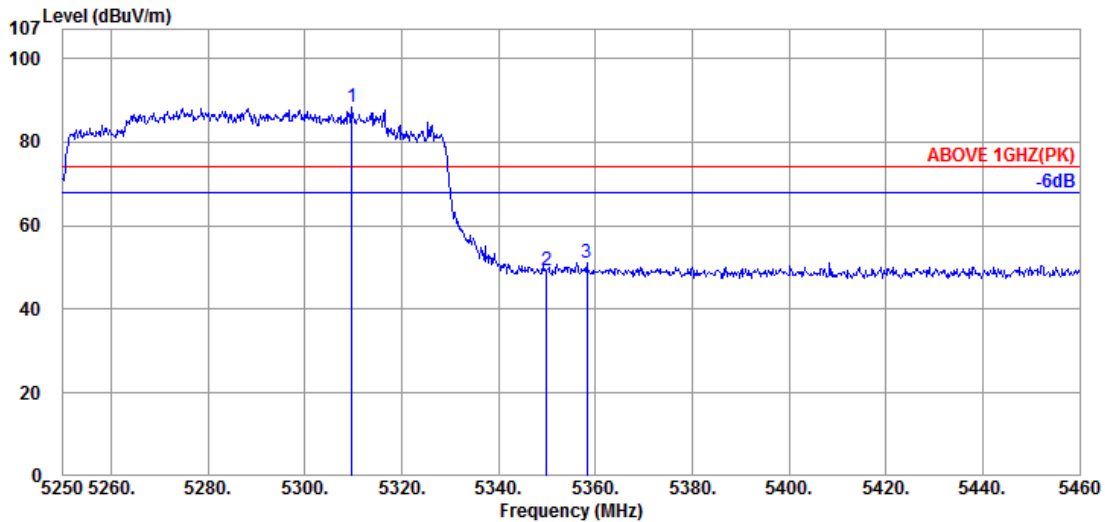

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.640	34.60	10.46	34.33	77.48	88.21	---	---	Peak
5349.960	34.60	10.48	34.31	38.44	49.21	74.00	24.79	Peak
5358.150	34.60	10.48	34.31	40.53	51.30	74.00	22.70	Peak

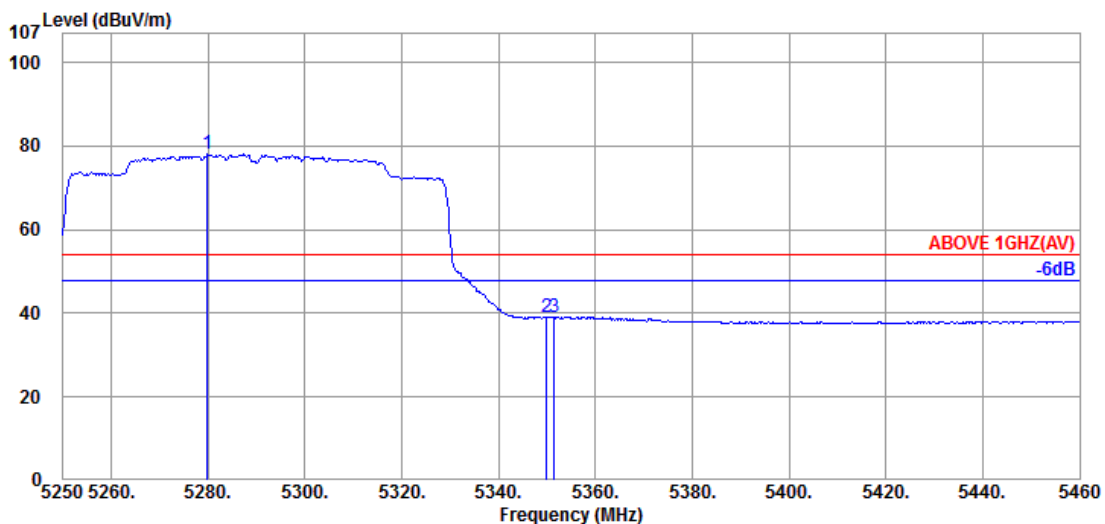


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.820	34.57	10.44	34.34	67.33	78.00	---	---	Average
5349.960	34.60	10.48	34.31	28.35	39.12	54.00	14.88	Average
5351.430	34.60	10.48	34.31	28.46	39.23	54.00	14.77	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

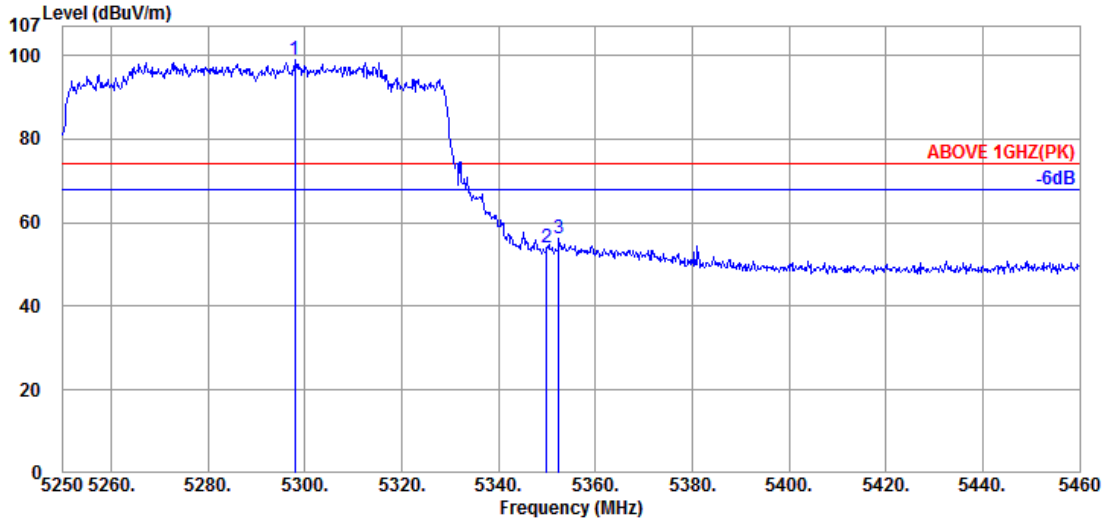

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.880	34.60	10.45	34.33	88.26	98.98	---	---	Peak
5349.960	34.60	10.48	34.31	43.11	53.88	74.00	20.12	Peak
5352.480	34.60	10.48	34.31	45.61	56.38	74.00	17.62	Peak

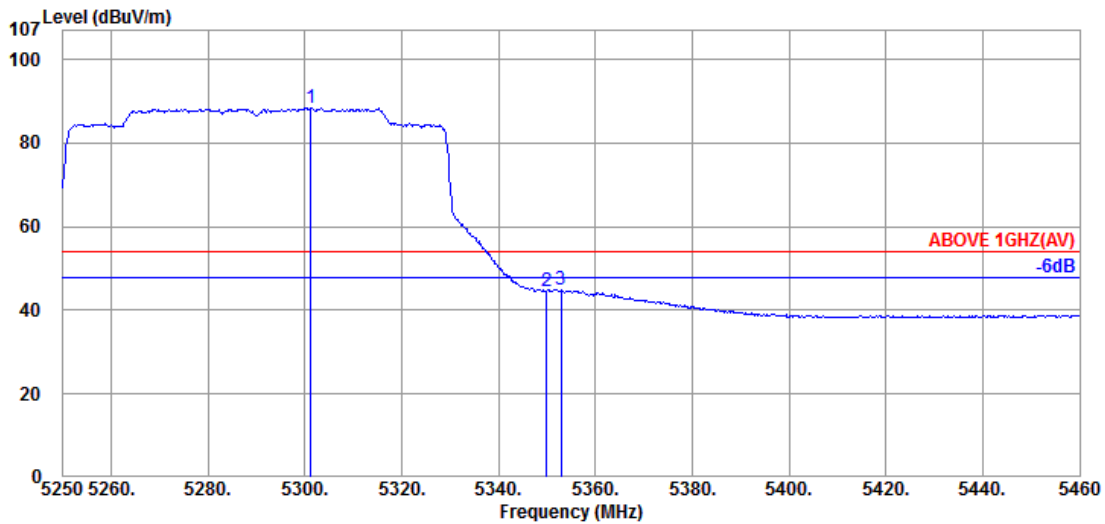


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.240	34.60	10.45	34.33	77.61	88.33	---	---	Average
5349.960	34.60	10.48	34.31	33.96	44.73	54.00	9.27	Average
5352.900	34.60	10.48	34.31	34.18	44.95	54.00	9.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

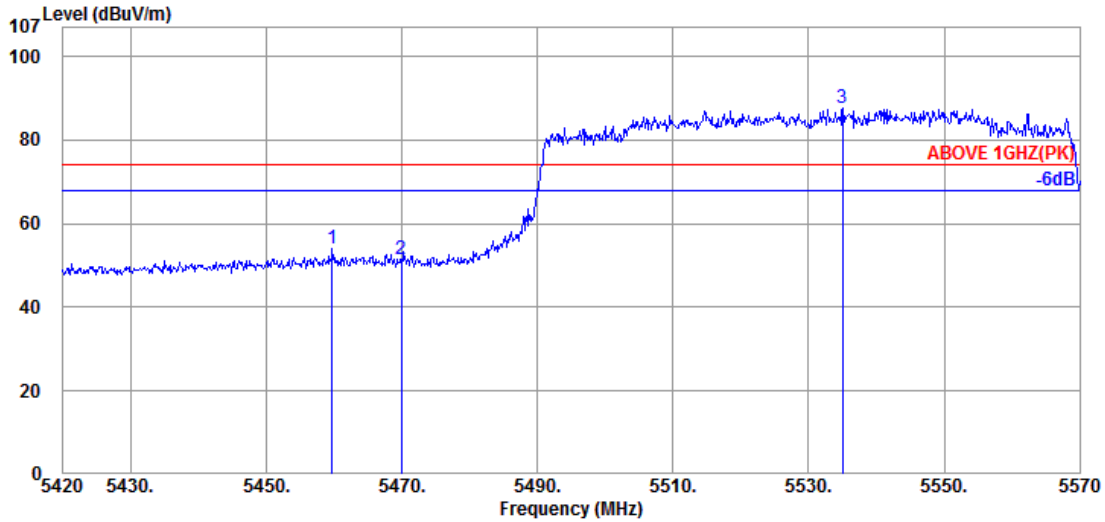

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.750	34.70	10.53	34.28	43.08	54.03	74.00	19.97	Peak
5469.950	34.67	10.54	34.28	40.59	51.52	74.00	22.48	Peak
@ 5535.050	34.60	10.60	34.29	76.88	87.79	---	---	Peak

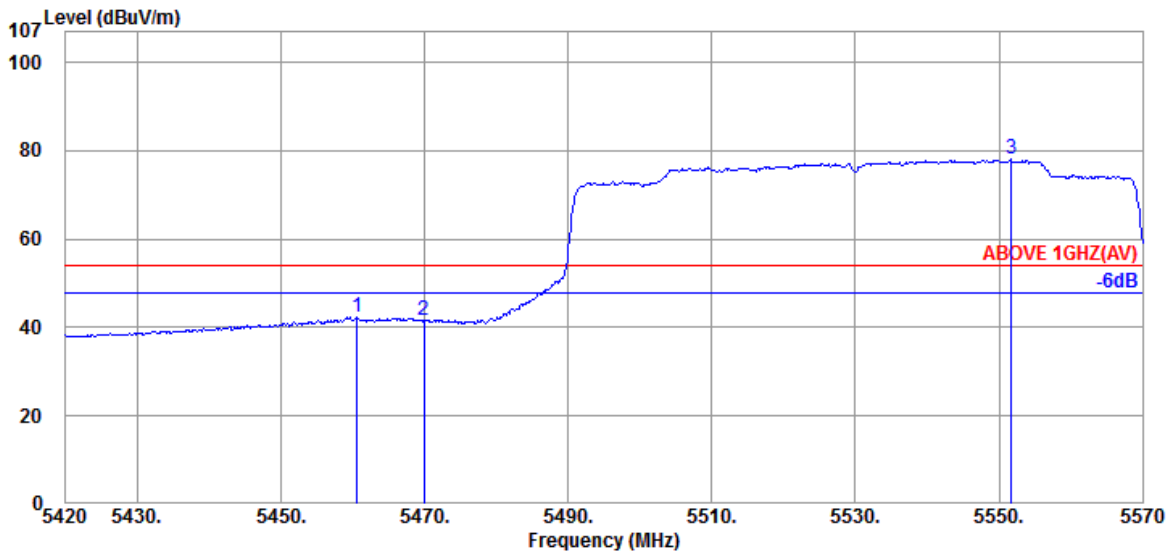


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.650	34.70	10.53	34.28	31.35	42.30	54.00	11.70	Average
5469.950	34.67	10.54	34.28	30.67	41.60	54.00	12.40	Average
@ 5551.700	34.60	10.63	34.30	67.04	77.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

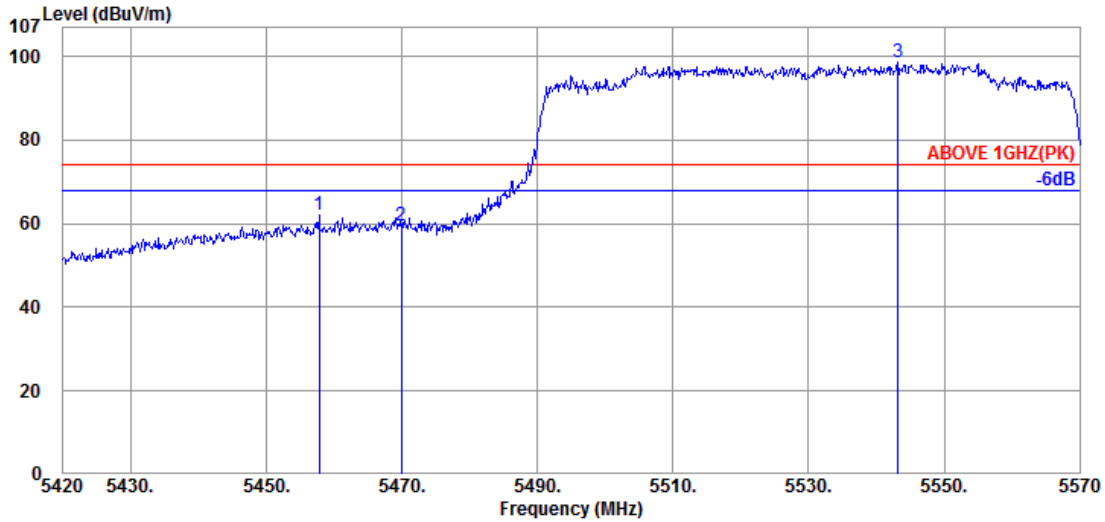

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.70	10.53	34.28	50.96	61.91	74.00	12.09	Peak
5469.950	34.67	10.54	34.28	48.50	59.43	74.00	14.57	Peak
@ 5543.150	34.60	10.60	34.30	87.84	98.74	---	---	Peak

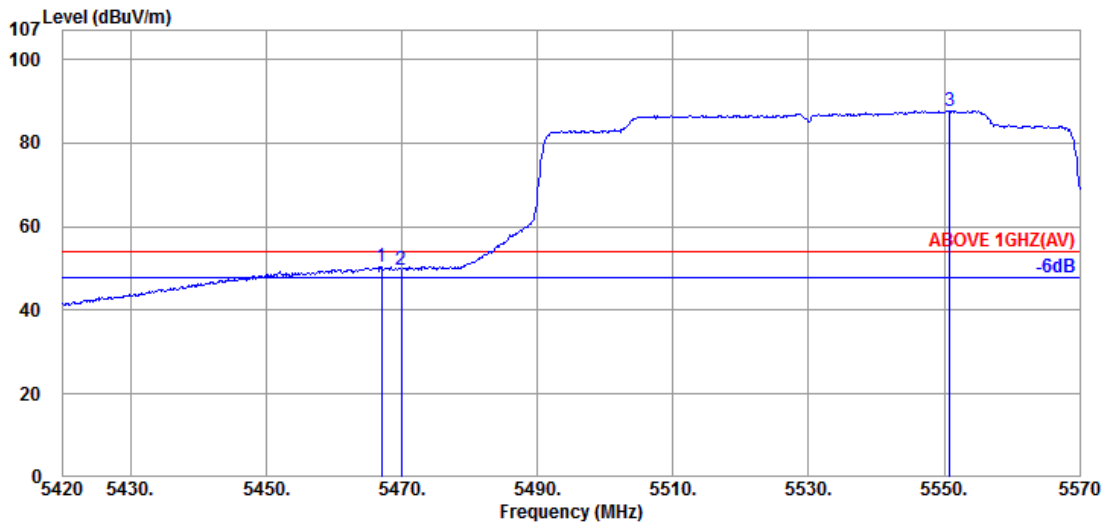


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.950	34.67	10.54	34.28	39.46	50.39	54.00	3.61	Average
5469.950	34.67	10.54	34.28	38.83	49.76	54.00	4.24	Average
@ 5550.800	34.60	10.63	34.30	76.89	87.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

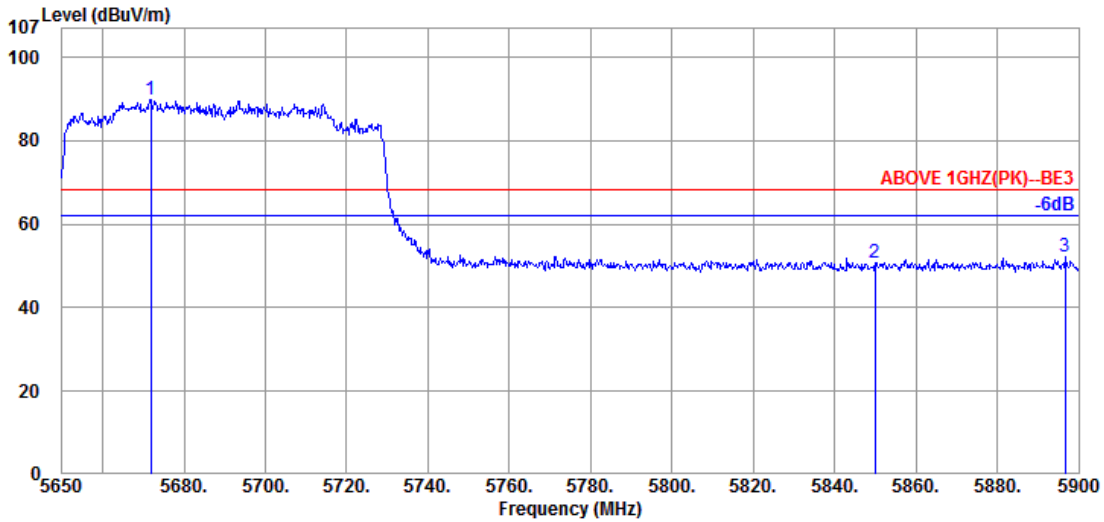

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5671.750	34.67	10.78	34.36	78.72	89.81	---	---	Peak
5850.000	35.40	10.99	34.43	38.95	50.91	68.20	17.29	Peak
5896.750	35.40	11.06	34.45	40.27	52.28	68.20	15.92	Peak

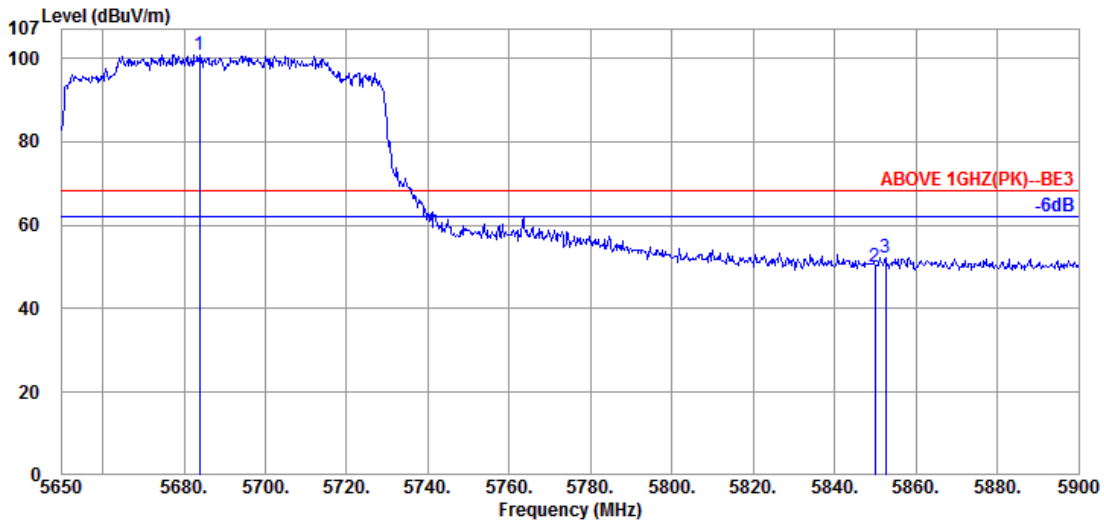


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.750	34.73	10.80	34.36	89.69	100.86	---	---	Peak
5850.000	35.40	10.99	34.43	38.17	50.13	68.20	18.07	Peak
5852.500	35.40	10.99	34.43	40.12	52.08	68.20	16.12	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

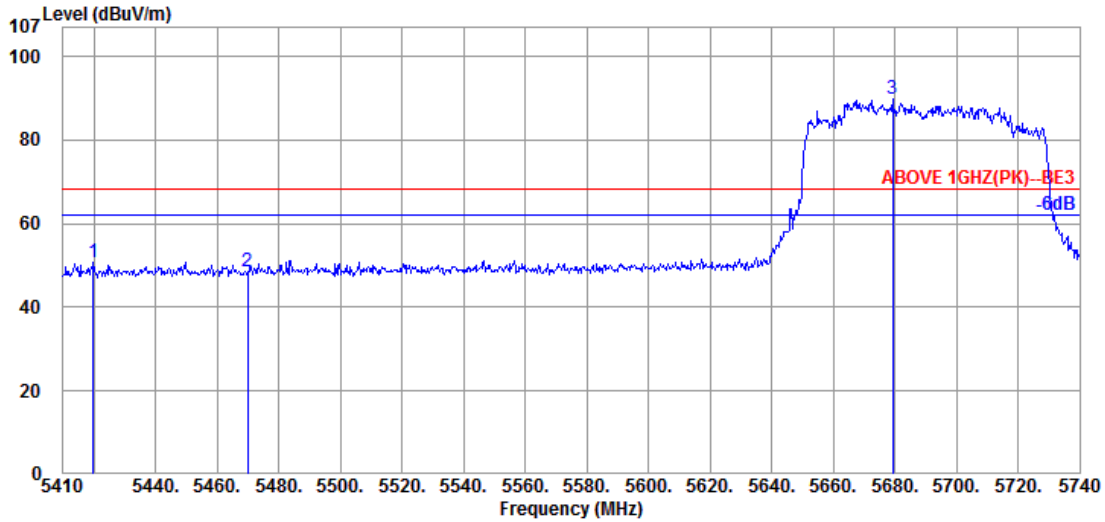

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.900	34.65	10.51	34.29	39.78	50.65	68.20	17.55	Peak
5470.060	34.67	10.54	34.28	37.79	48.72	68.20	19.48	Peak
@ 5679.280	34.73	10.78	34.36	78.67	89.82	---	---	Peak

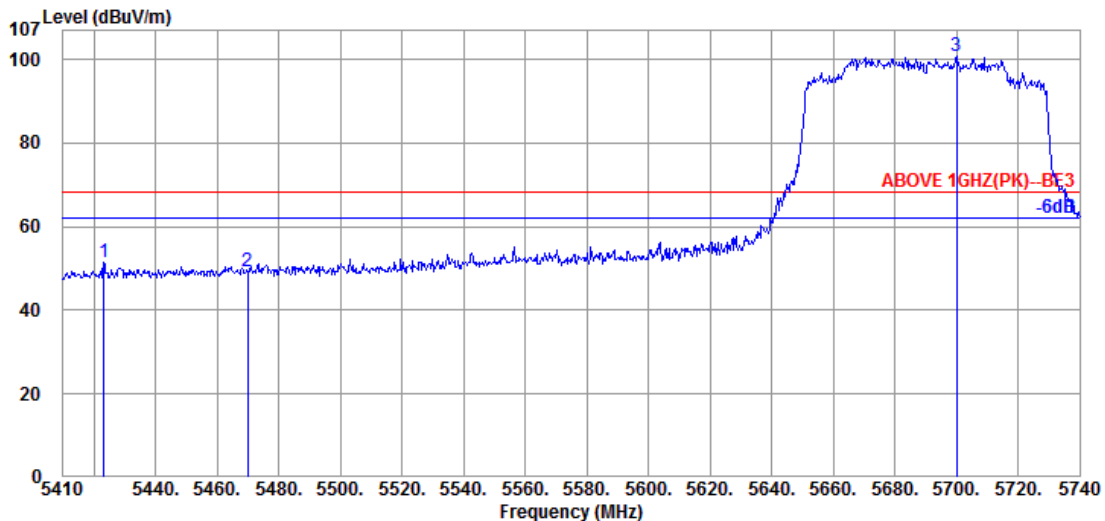


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.200	34.65	10.51	34.29	40.78	51.65	68.20	16.55	Peak
5470.060	34.67	10.54	34.28	38.41	49.34	68.20	18.86	Peak
@ 5700.070	34.80	10.80	34.36	89.46	100.70	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	Band	NII-III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

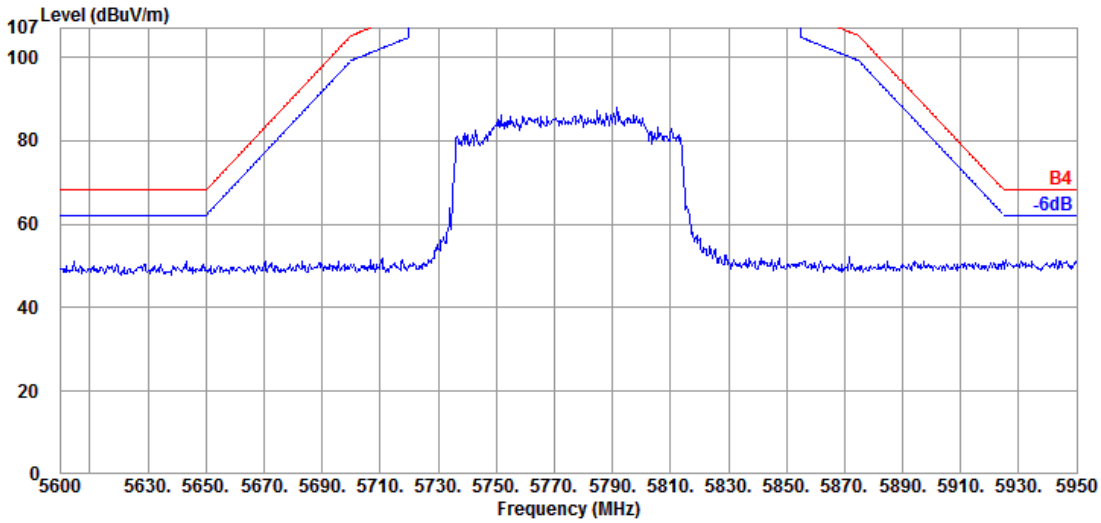

Antenna at Vertical Polarization

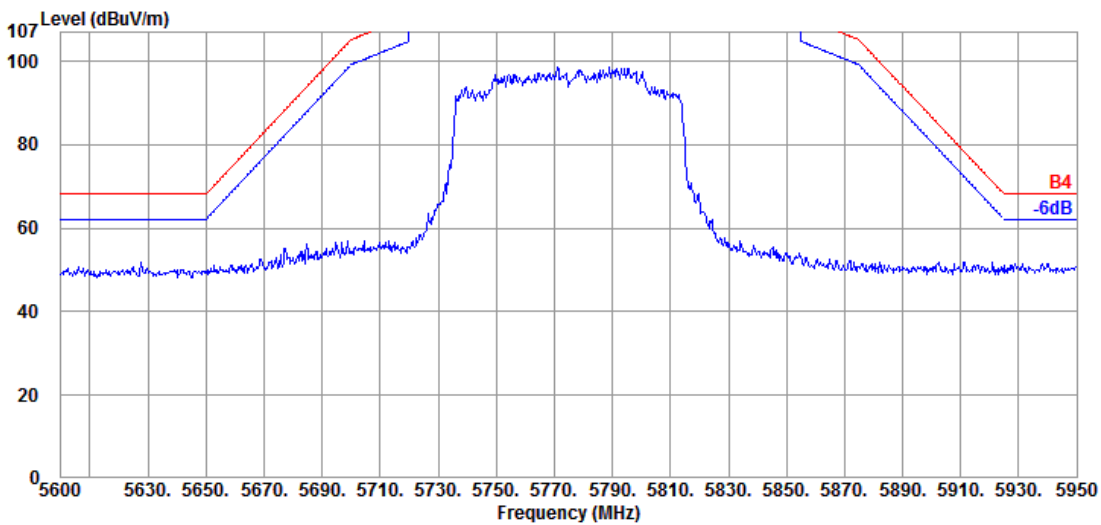


Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

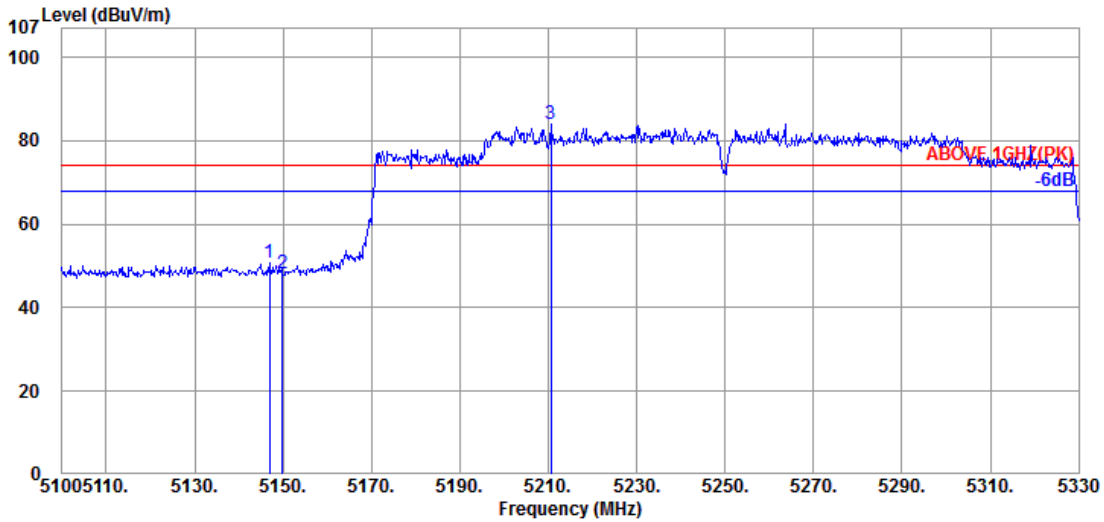

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.920	34.40	10.36	34.38	40.36	50.74	74.00	23.26	Peak
5149.910	34.40	10.36	34.38	37.76	48.14	74.00	25.86	Peak
@ 5210.630	34.50	10.40	34.36	73.57	84.11	---	---	Peak

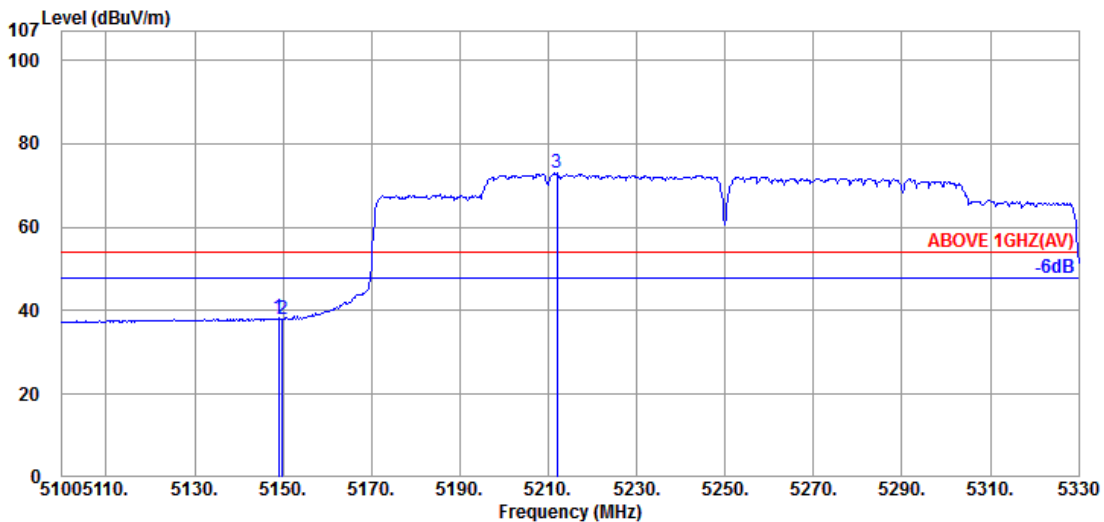


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.40	10.36	34.38	27.81	38.19	54.00	15.81	Average
5149.910	34.40	10.36	34.38	27.57	37.95	54.00	16.05	Average
@ 5212.010	34.50	10.40	34.36	62.38	72.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

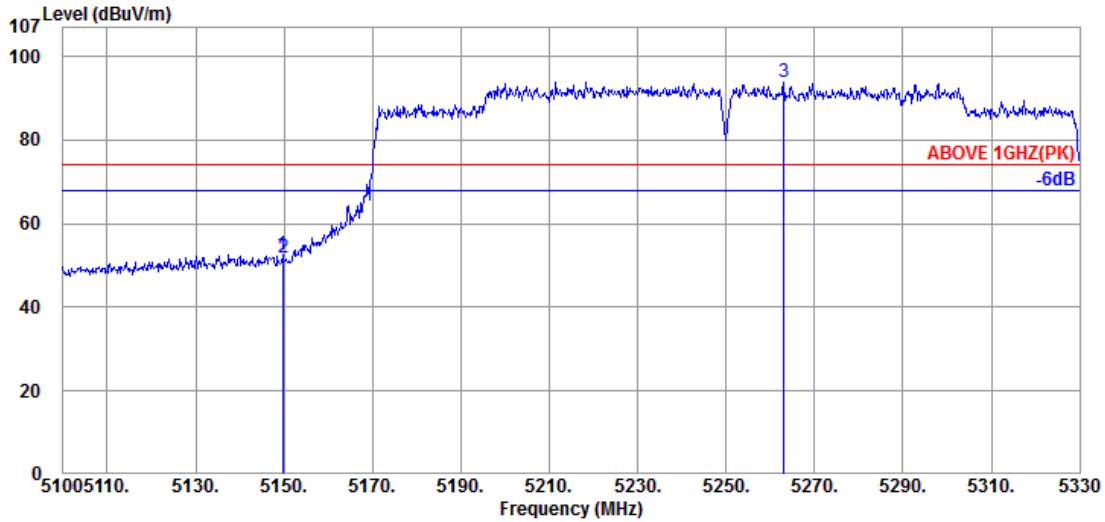

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.40	10.36	34.38	42.32	52.70	74.00	21.30	Peak
5149.910	34.40	10.36	34.38	41.63	52.01	74.00	21.99	Peak
@ 5263.070	34.53	10.43	34.34	83.31	93.93	---	---	Peak

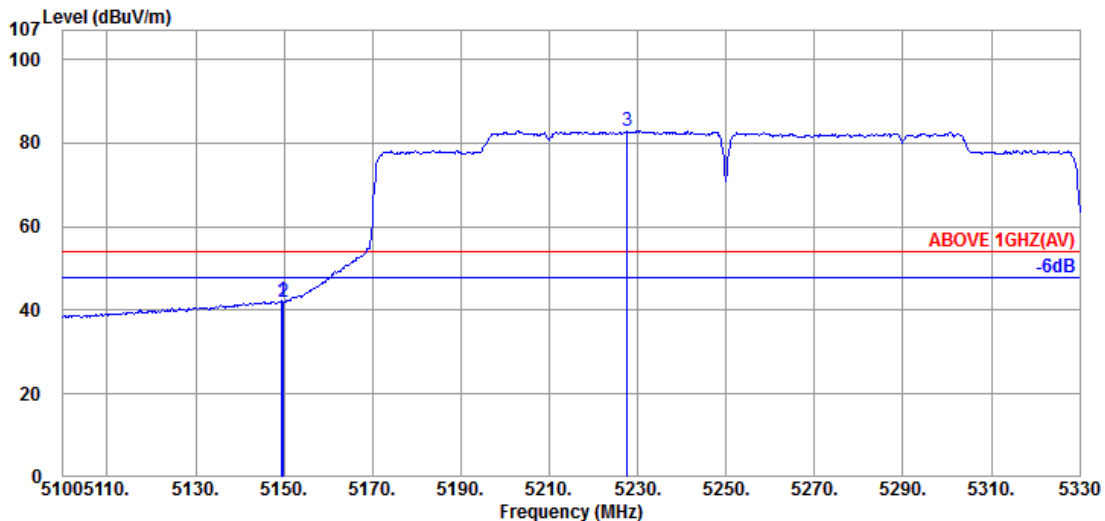


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.40	10.36	34.38	31.80	42.18	54.00	11.82	Average
5149.910	34.40	10.36	34.38	31.76	42.14	54.00	11.86	Average
@ 5227.650	34.50	10.41	34.35	72.37	82.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

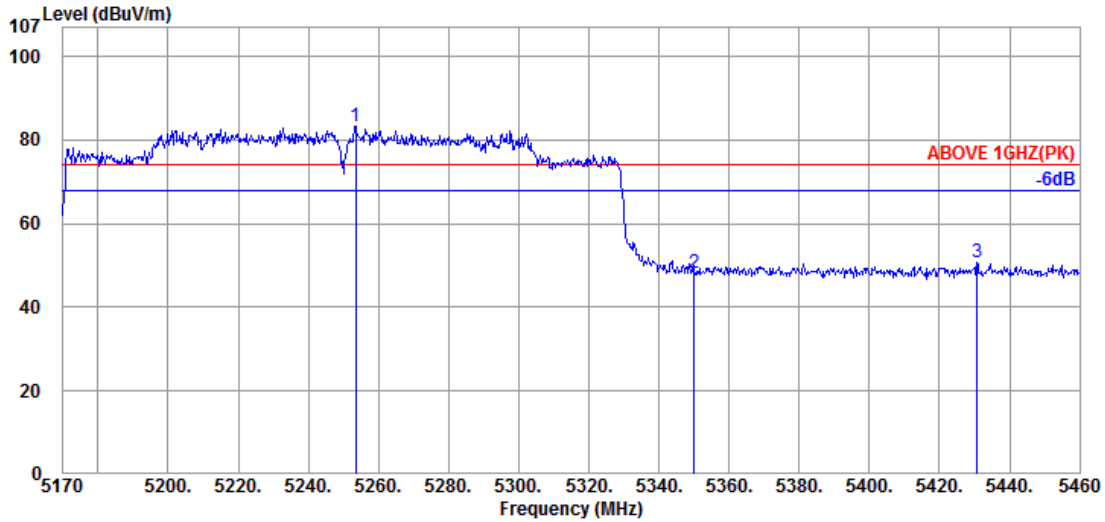

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5253.520	34.50	10.42	34.35	72.60	83.17	---	---	Peak
5350.090	34.60	10.48	34.31	37.44	48.21	74.00	25.79	Peak
5430.710	34.65	10.52	34.29	39.79	50.67	74.00	23.33	Peak

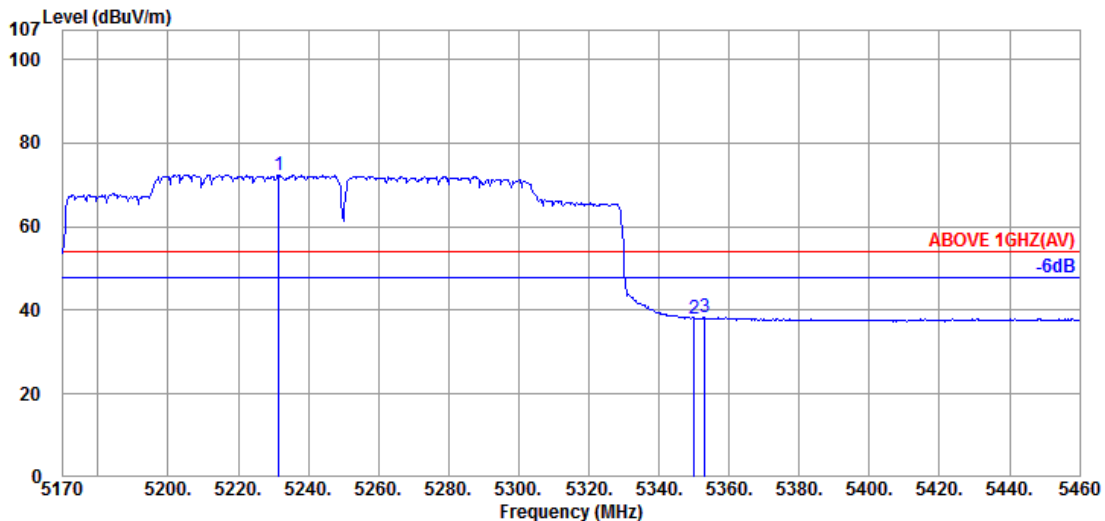


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.480	34.50	10.41	34.35	61.87	72.43	---	---	Average
5350.090	34.60	10.48	34.31	27.36	38.13	54.00	15.87	Average
5352.990	34.60	10.48	34.31	27.58	38.35	54.00	15.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

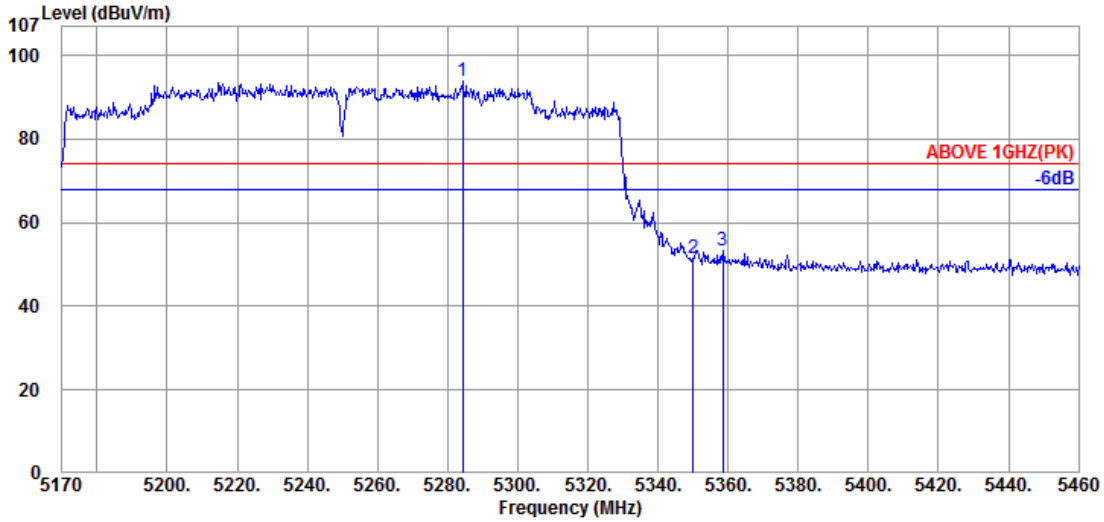

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.260	34.57	10.44	34.34	83.07	93.74	---	---	Peak
5350.090	34.60	10.48	34.31	40.55	51.32	74.00	22.68	Peak
5358.500	34.60	10.48	34.31	42.54	53.31	74.00	20.69	Peak

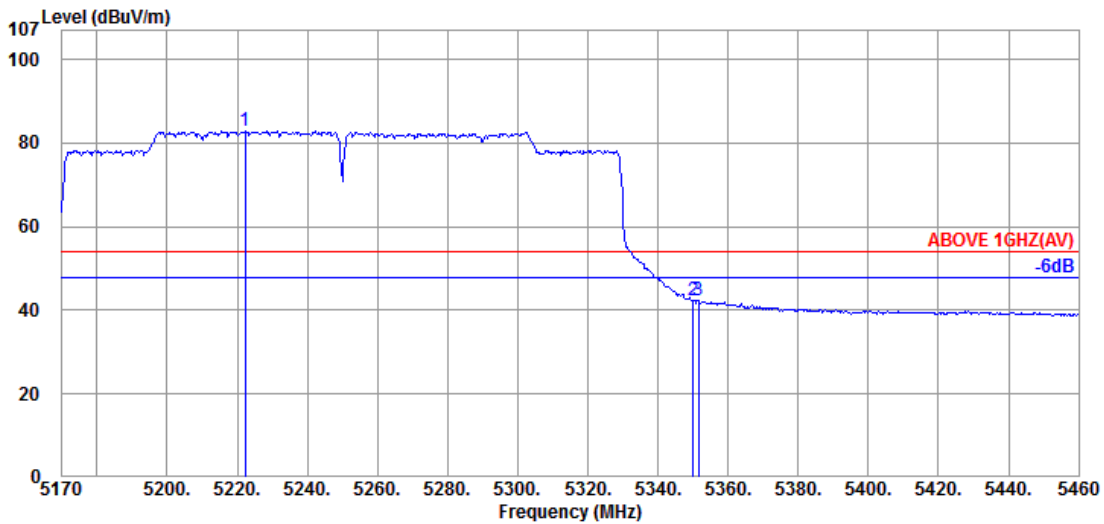


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.200	34.50	10.40	34.36	72.40	82.94	---	---	Average
5350.090	34.60	10.48	34.31	31.50	42.27	54.00	11.73	Average
5351.540	34.60	10.48	34.31	31.65	42.42	54.00	11.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

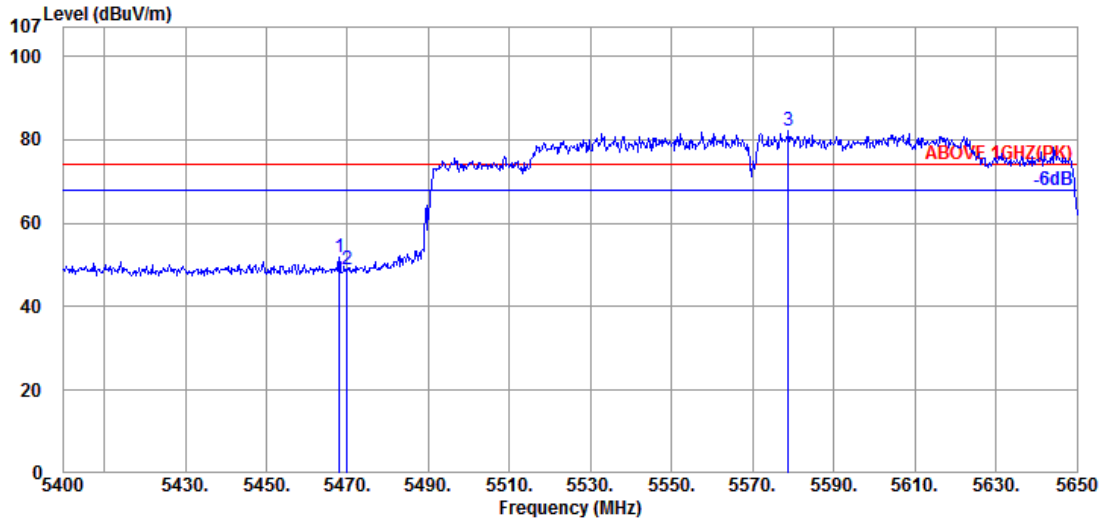

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.000	34.67	10.54	34.28	40.82	51.75	74.00	23.16	Peak
5470.000	34.67	10.54	34.28	37.95	48.88	74.00	25.53	Peak
@ 5578.750	34.60	10.65	34.31	71.08	82.02	---	---	Peak

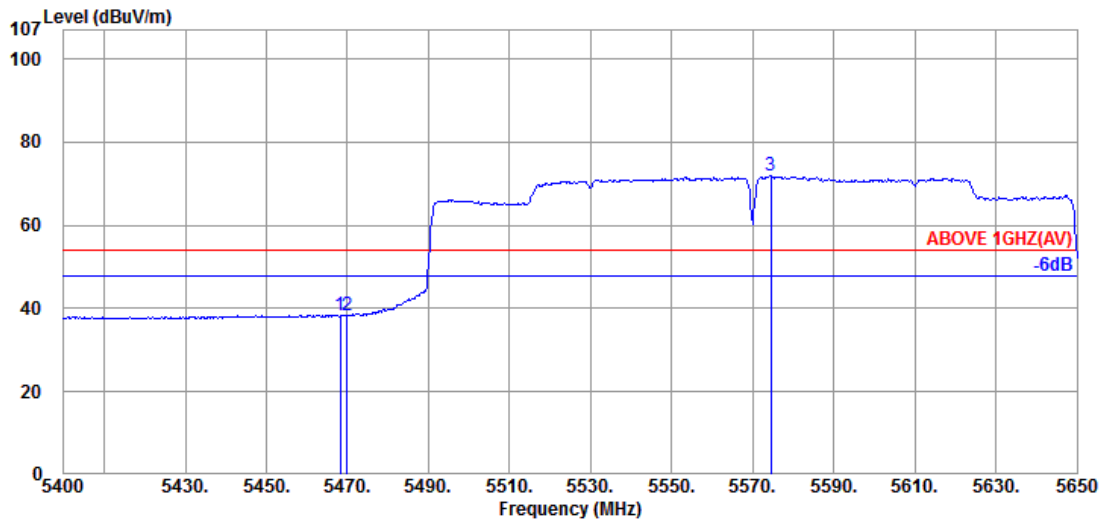


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.250	34.67	10.54	34.28	27.57	38.50	54.00	15.50	Average
5470.000	34.67	10.54	34.28	27.37	38.30	54.00	15.70	Average
@ 5574.500	34.60	10.65	34.30	60.92	71.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

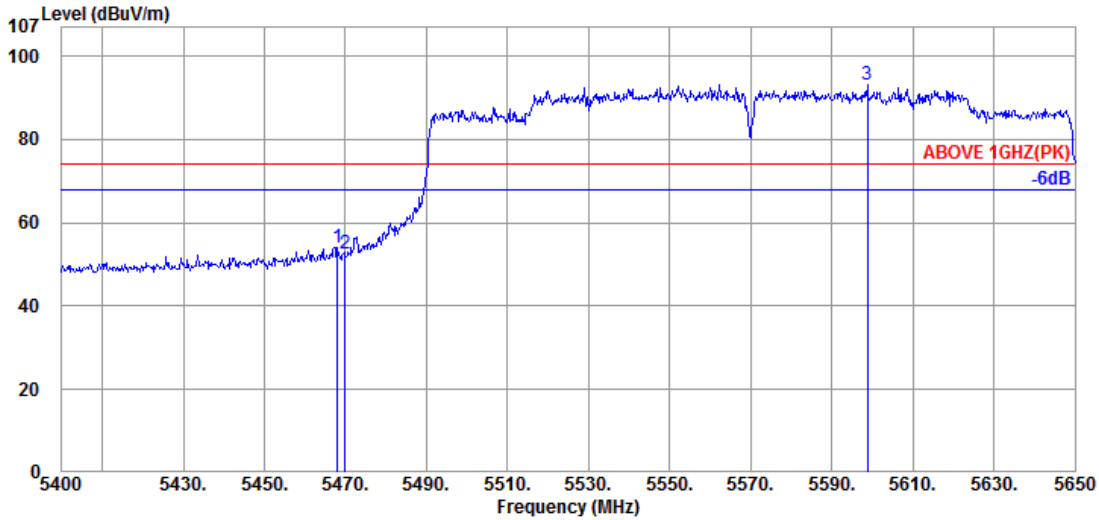

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.67	10.54	34.28	43.15	54.08	74.00	19.92	Peak
5470.000	34.67	10.54	34.28	41.78	52.71	74.00	21.29	Peak
@ 5598.750	34.60	10.69	34.32	82.16	93.13	---	---	Peak

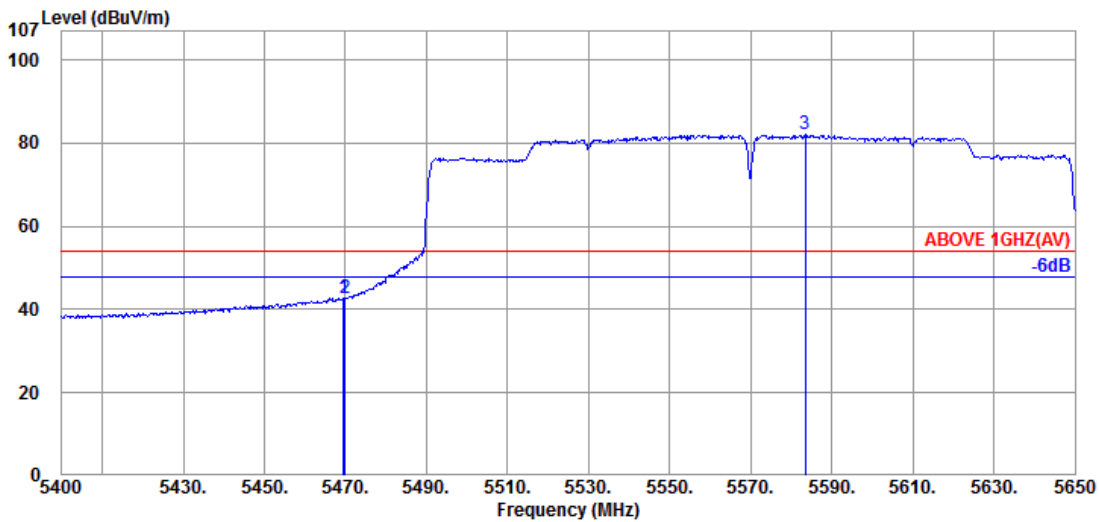


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.67	10.54	34.28	31.71	42.64	54.00	11.36	Average
5470.000	34.67	10.54	34.28	31.80	42.73	54.00	11.27	Average
@ 5583.500	34.60	10.67	34.31	71.20	82.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

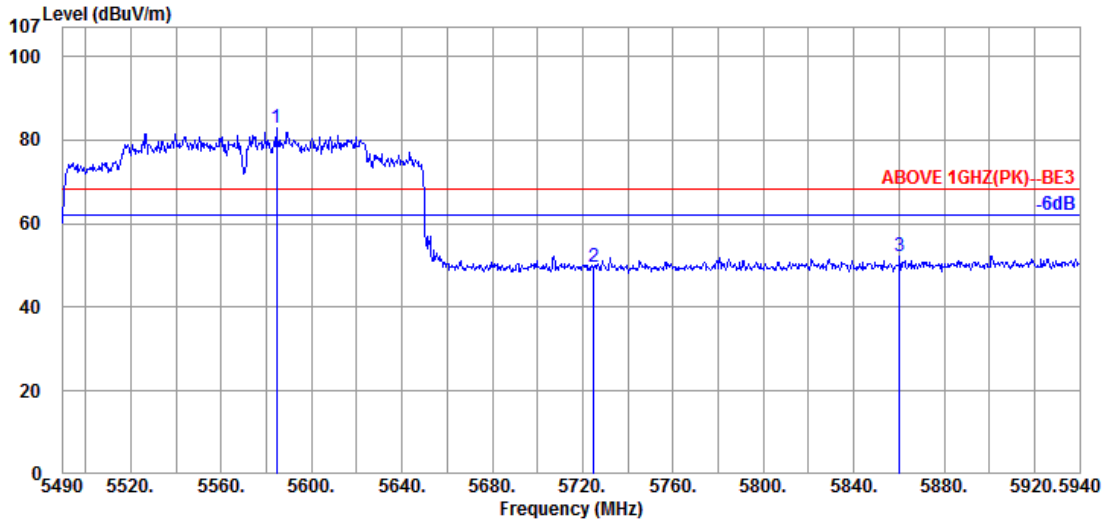

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5584.500	34.60	10.67	34.31	71.86	82.82	---	---	Peak
5724.900	34.80	10.84	34.37	38.53	49.80	68.20	18.40	Peak
5860.350	35.40	11.02	34.44	40.35	52.33	68.20	15.87	Peak

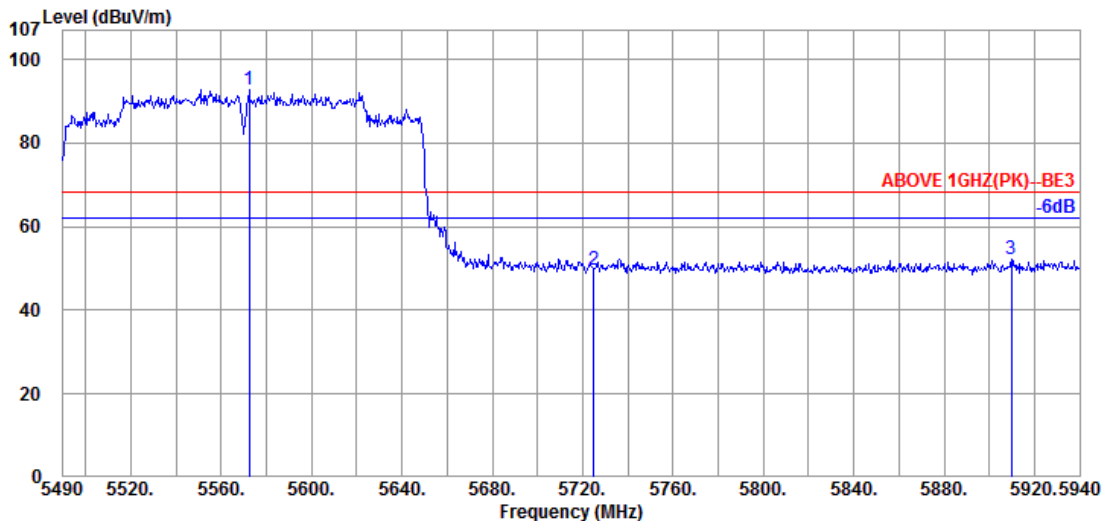


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5572.350	34.60	10.65	34.30	81.87	92.82	---	---	Peak
5724.900	34.80	10.84	34.37	38.39	49.66	68.20	18.54	Peak
5909.850	35.47	11.08	34.46	40.10	52.19	68.20	16.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

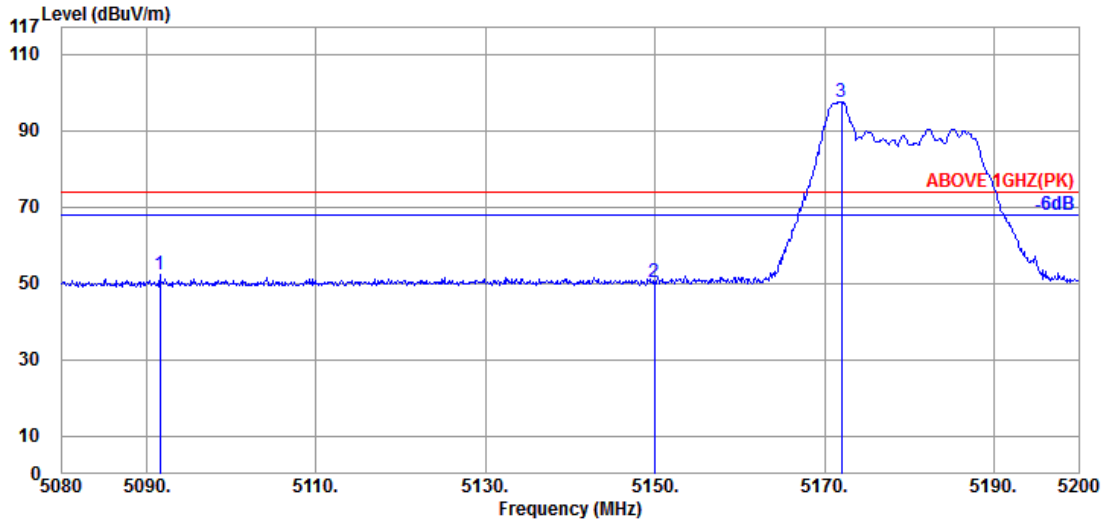

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5091.520	34.28	10.34	34.40	41.97	52.19	74.00	21.81	Peak
5149.960	34.40	10.36	34.38	39.90	50.28	74.00	23.72	Peak
@ 5172.040	34.47	10.37	34.37	87.08	97.55	---	---	Peak

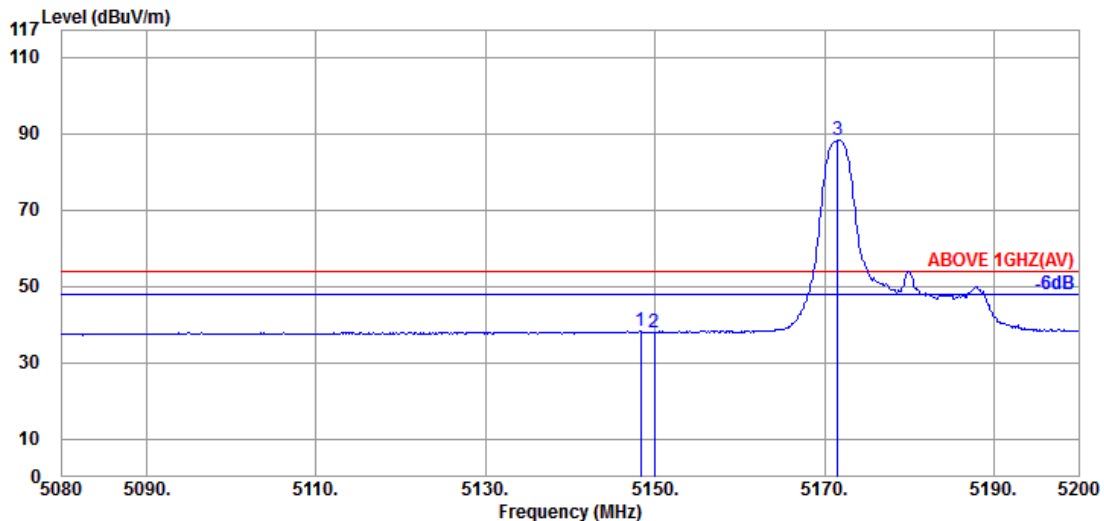


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.280	34.40	10.36	34.38	27.79	38.17	54.00	15.83	Average
5149.960	34.40	10.36	34.38	27.58	37.96	54.00	16.04	Average
@ 5171.560	34.43	10.37	34.37	77.80	88.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

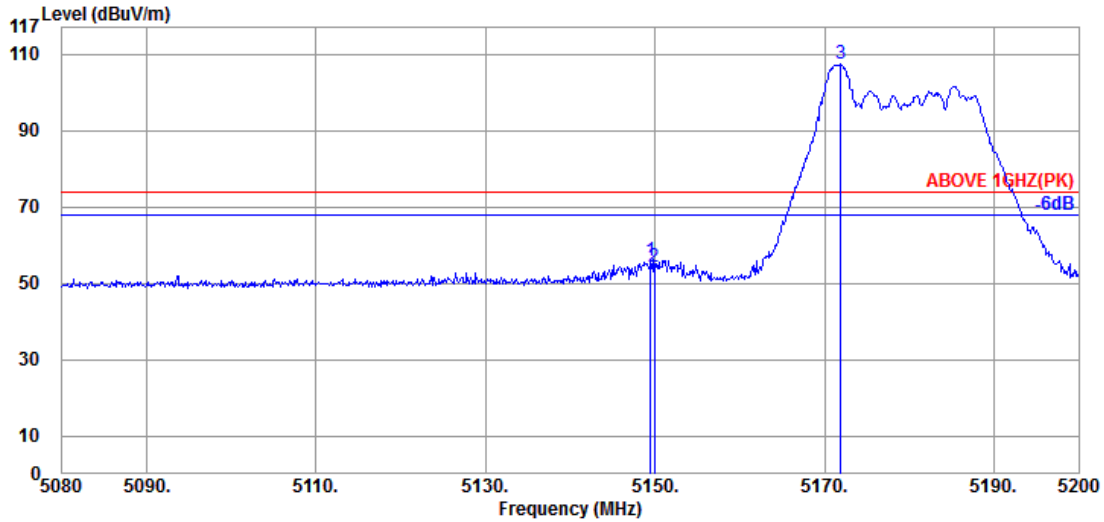

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.480	34.40	10.36	34.38	45.36	55.74	74.00	18.26	Peak
5149.960	34.40	10.36	34.38	43.82	54.20	74.00	19.80	Peak
@ 5171.920	34.47	10.37	34.37	96.78	107.25	---	---	Peak

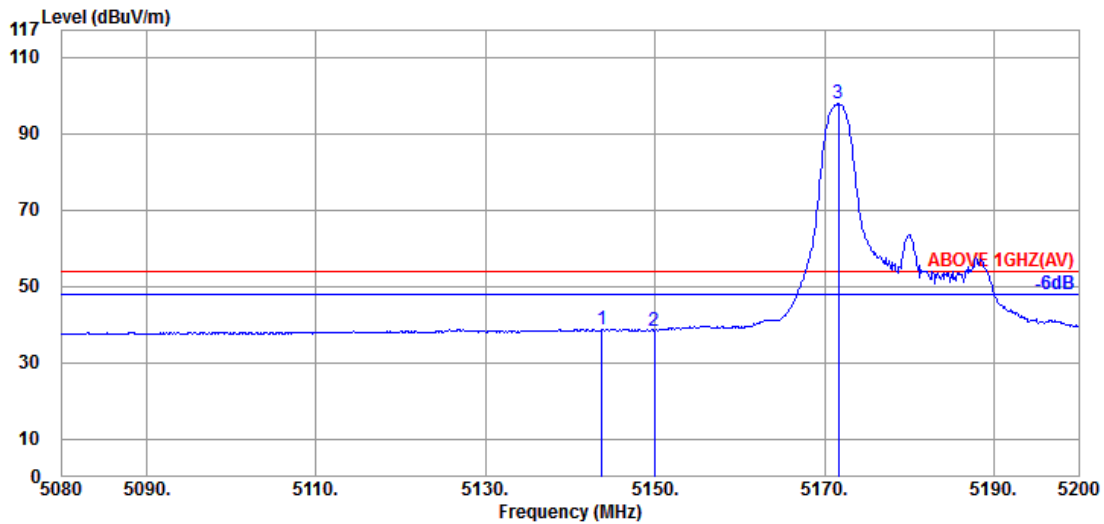


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.720	34.40	10.36	34.38	28.54	38.92	54.00	15.08	Average
5149.960	34.40	10.36	34.38	28.09	38.47	54.00	15.53	Average
@ 5171.680	34.47	10.37	34.37	87.42	97.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

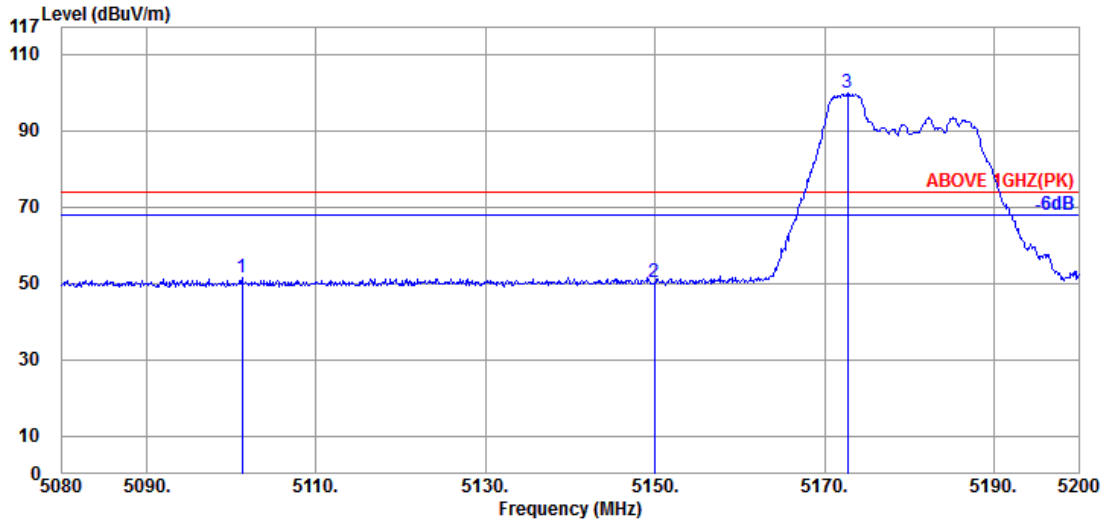

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.240	34.30	10.34	34.40	41.44	51.68	74.00	22.32	Peak
5149.960	34.40	10.36	34.38	40.00	50.38	74.00	23.62	Peak
@ 5172.760	34.47	10.37	34.37	89.26	99.73	---	---	Peak

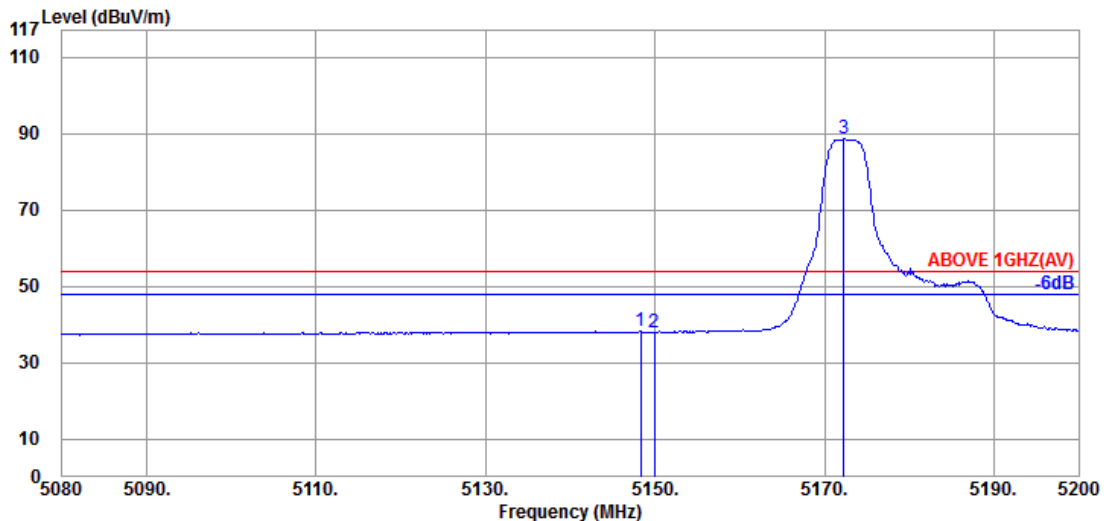


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.280	34.40	10.36	34.38	27.77	38.15	54.00	15.85	Average
5149.960	34.40	10.36	34.38	27.59	37.97	54.00	16.03	Average
@ 5172.280	34.47	10.37	34.37	78.08	88.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

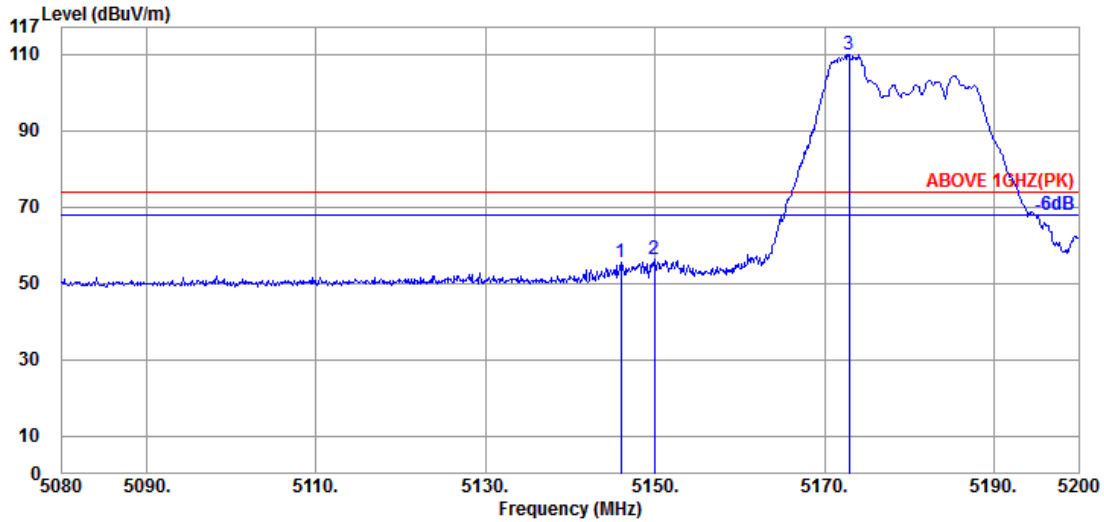

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	34.40	10.36	34.38	45.11	55.49	74.00	18.51	Peak
5149.960	34.40	10.36	34.38	46.12	56.50	74.00	17.50	Peak
@ 5172.880	34.47	10.37	34.37	99.49	109.96	---	---	Peak

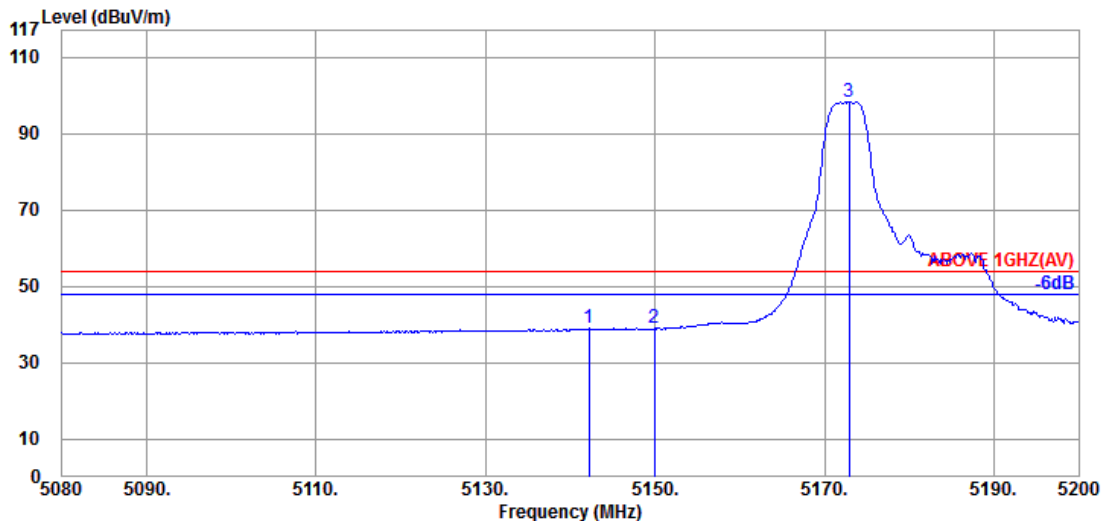


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.160	34.40	10.36	34.38	28.60	38.98	54.00	15.02	Average
5149.960	34.40	10.36	34.38	28.56	38.94	54.00	15.06	Average
@ 5172.880	34.47	10.37	34.37	87.85	98.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

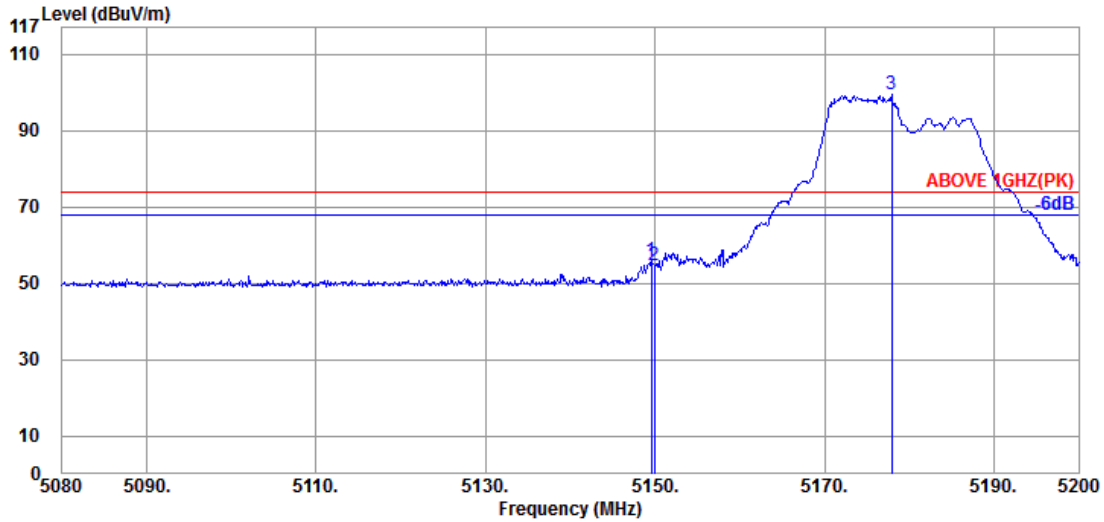

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.40	10.36	34.38	45.57	55.95	74.00	18.05	Peak
5149.960	34.40	10.36	34.38	44.45	54.83	74.00	19.17	Peak
@ 5177.920	34.47	10.38	34.37	88.79	99.27	---	---	Peak

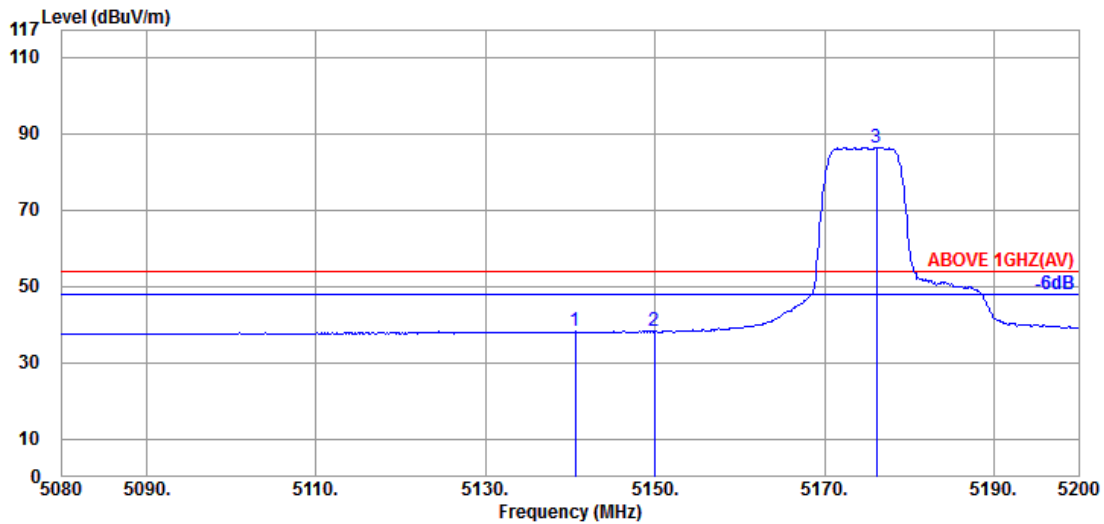


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.600	34.37	10.36	34.38	27.95	38.30	54.00	15.70	Average
5149.960	34.40	10.36	34.38	27.91	38.29	54.00	15.71	Average
@ 5176.120	34.47	10.38	34.37	75.81	86.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

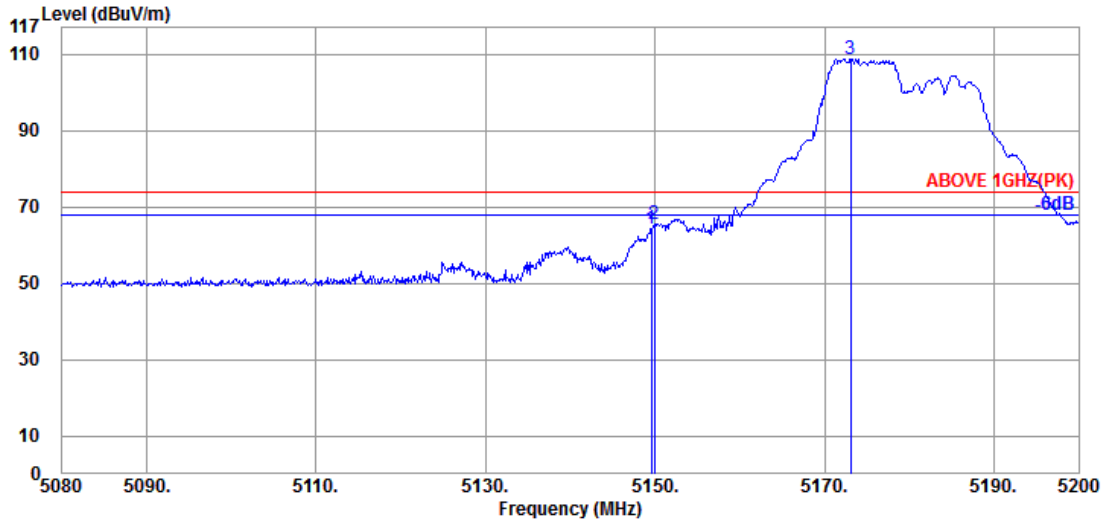

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.40	10.36	34.38	54.09	64.47	74.00	9.53	Peak
5149.960	34.40	10.36	34.38	55.00	65.38	74.00	8.62	Peak
@ 5173.120	34.47	10.37	34.37	98.33	108.80	---	---	Peak

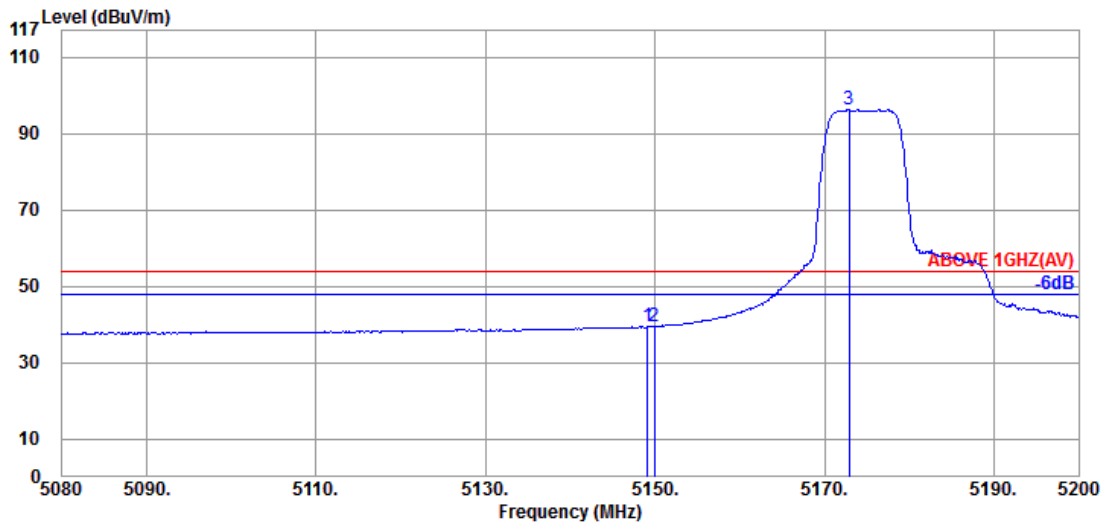


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.120	34.40	10.36	34.38	29.11	39.49	54.00	14.51	Average
5149.960	34.40	10.36	34.38	29.21	39.59	54.00	14.41	Average
@ 5172.880	34.47	10.37	34.37	85.68	96.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

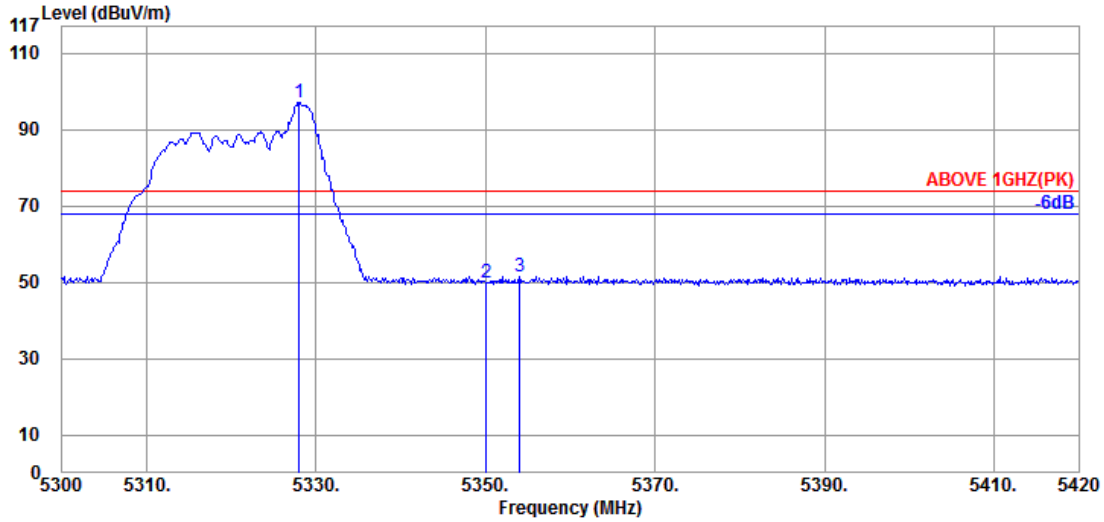

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.960	34.60	10.47	34.33	86.24	96.98	---	---	Peak
5350.040	34.60	10.48	34.31	39.15	49.92	74.00	24.08	Peak
5354.000	34.60	10.48	34.31	40.83	51.60	74.00	22.40	Peak

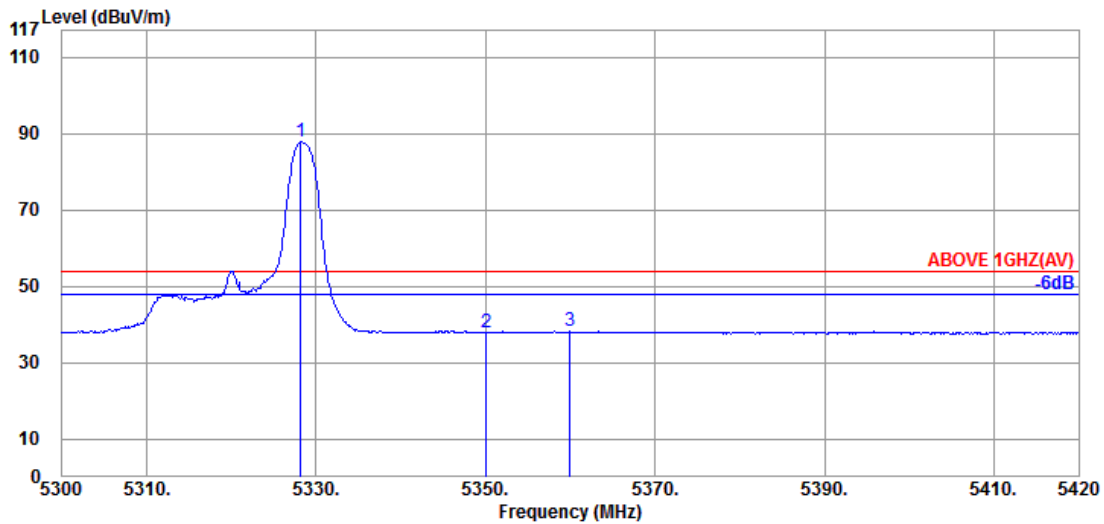


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	34.60	10.47	34.32	77.12	87.87	---	---	Average
5350.040	34.60	10.48	34.31	27.19	37.96	54.00	16.04	Average
5360.000	34.60	10.48	34.31	27.46	38.23	54.00	15.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

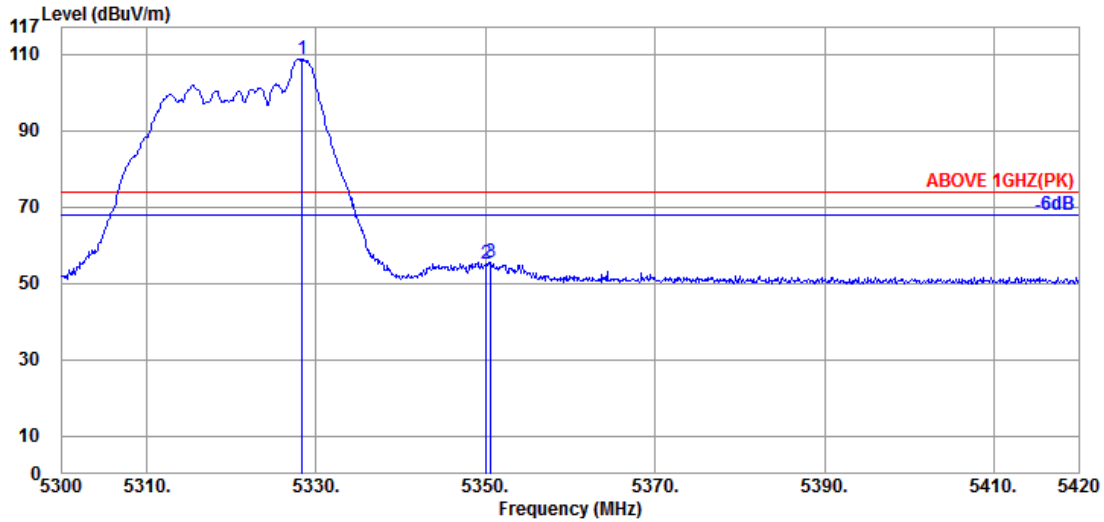

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.60	10.47	34.32	98.01	108.76	---	---	Peak
5350.040	34.60	10.48	34.31	44.32	55.09	74.00	18.91	Peak
5350.640	34.60	10.48	34.31	44.85	55.62	74.00	18.38	Peak

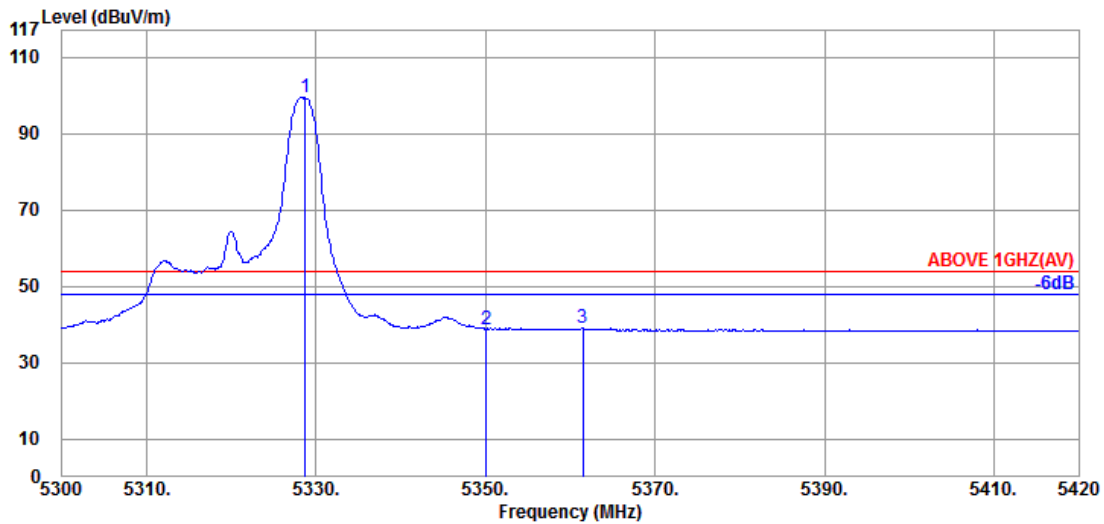


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.680	34.60	10.47	34.32	88.54	99.29	---	---	Average
5350.040	34.60	10.48	34.31	28.16	38.93	54.00	15.07	Average
5361.440	34.60	10.49	34.31	28.24	39.02	54.00	14.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

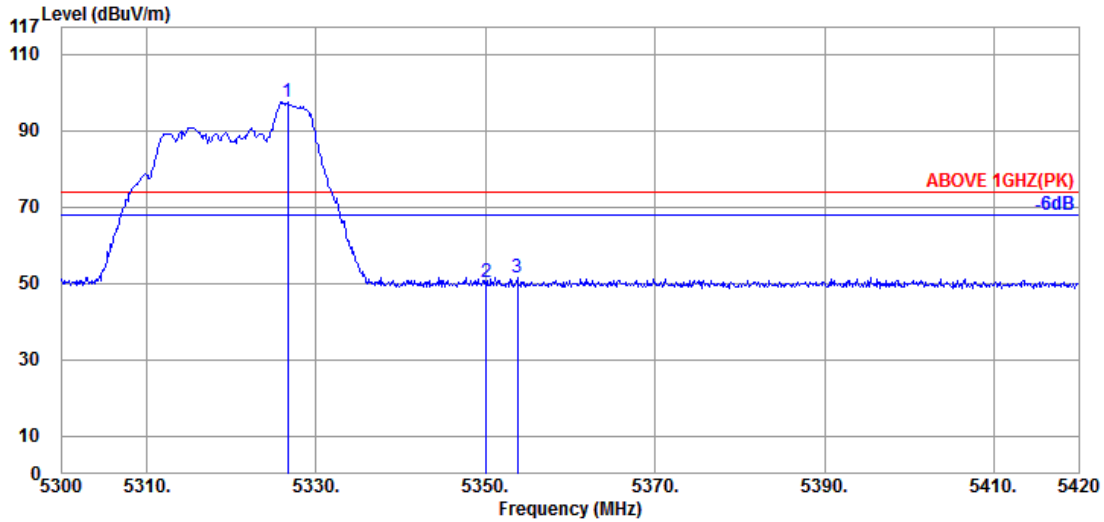

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.640	34.60	10.47	34.33	86.81	97.55	---	---	Peak
5350.040	34.60	10.48	34.31	39.57	50.34	74.00	23.66	Peak
5353.760	34.60	10.48	34.31	40.84	51.61	74.00	22.39	Peak

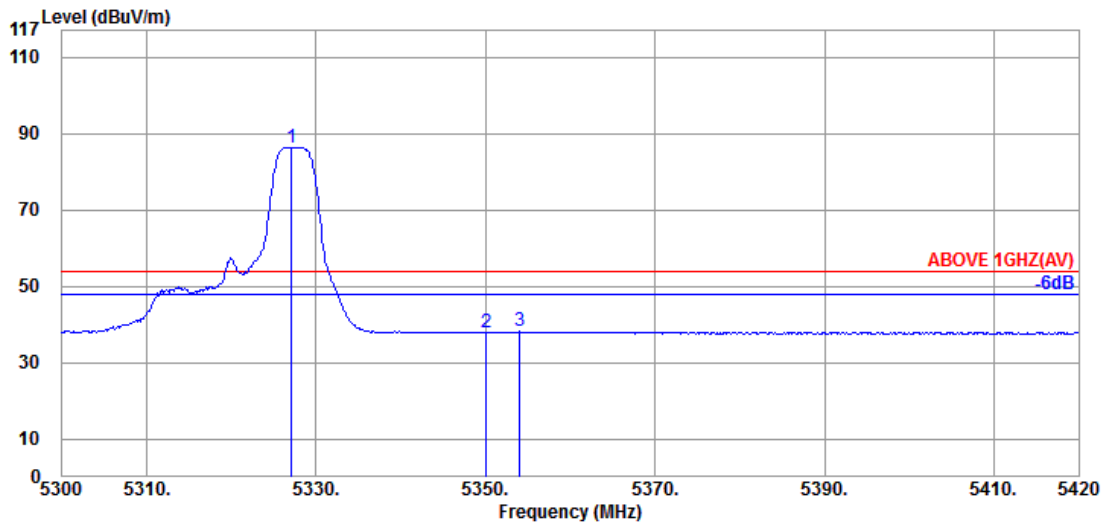


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.120	34.60	10.47	34.33	75.67	86.41	---	---	Average
5350.040	34.60	10.48	34.31	27.13	37.90	54.00	16.10	Average
5354.000	34.60	10.48	34.31	27.38	38.15	54.00	15.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

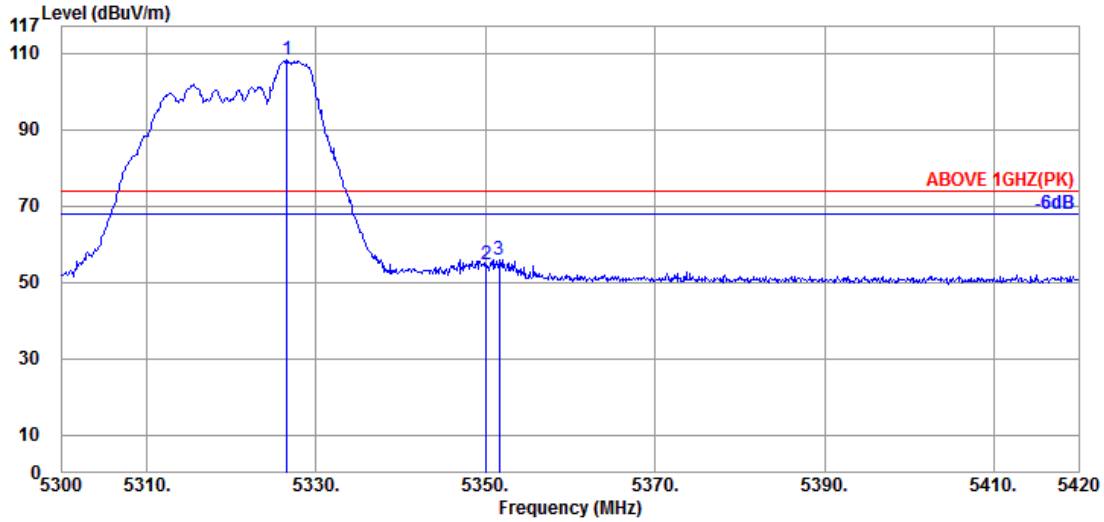

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.520	34.60	10.47	34.33	97.36	108.10	---	---	Peak
5350.040	34.60	10.48	34.31	43.98	54.75	74.00	19.25	Peak
5351.600	34.60	10.48	34.31	45.13	55.90	74.00	18.10	Peak

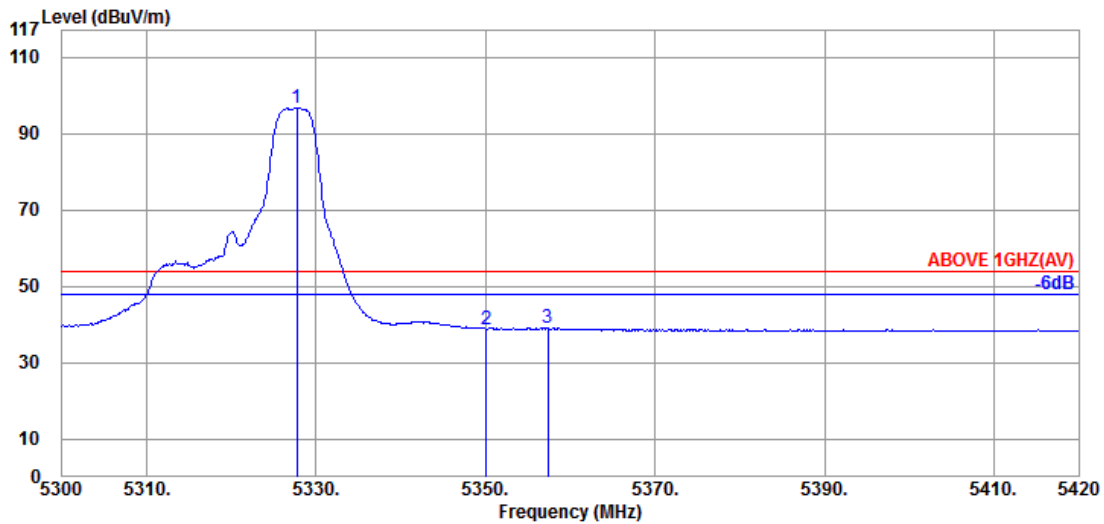


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.720	34.60	10.47	34.33	86.01	96.75	---	---	Average
5350.040	34.60	10.48	34.31	28.11	38.88	54.00	15.12	Average
5357.360	34.60	10.48	34.31	28.39	39.16	54.00	14.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

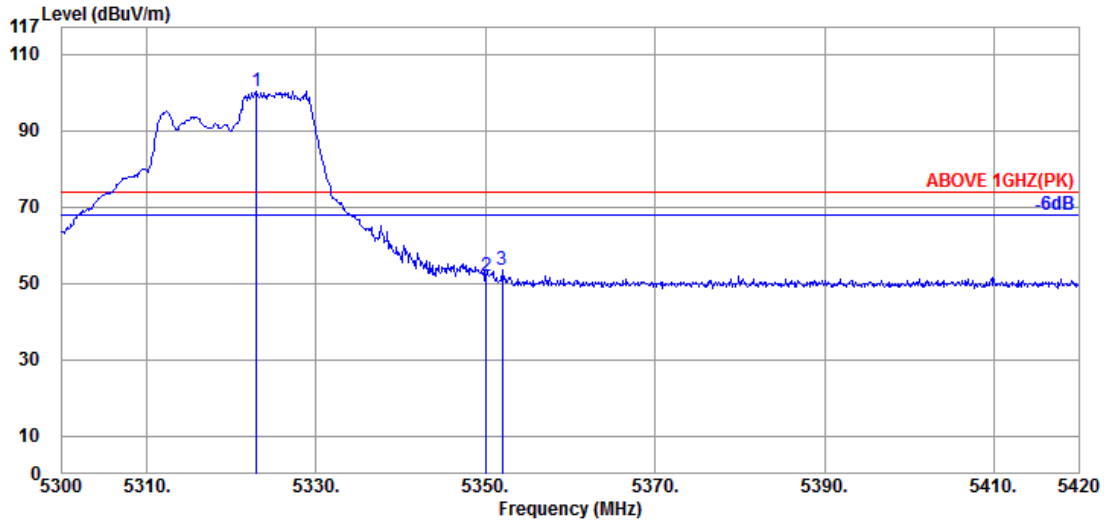

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.920	34.60	10.46	34.33	89.53	100.26	---	---	Peak
5350.040	34.60	10.48	34.31	41.05	51.82	74.00	22.18	Peak
5351.960	34.60	10.48	34.31	42.69	53.46	74.00	20.54	Peak

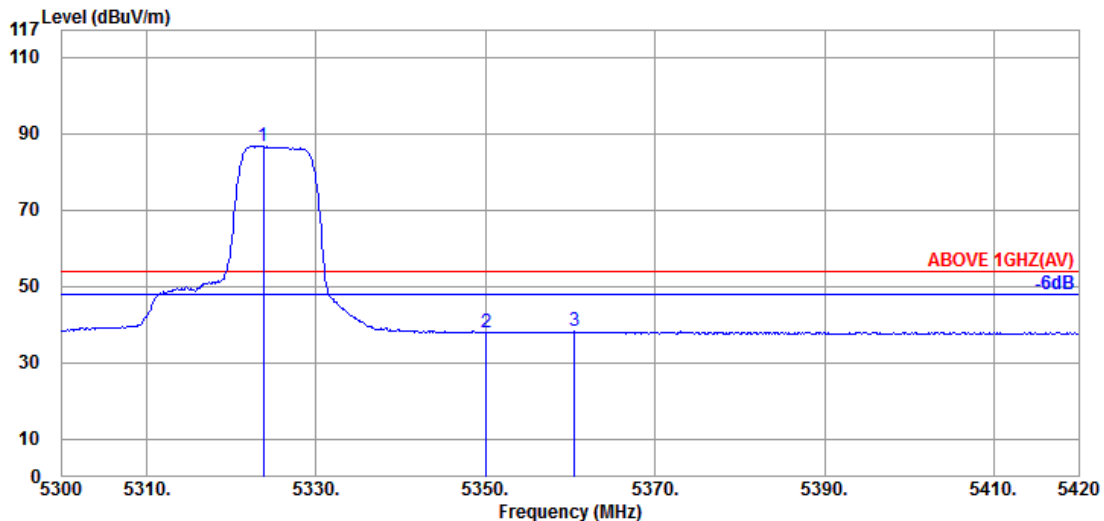


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.760	34.60	10.46	34.33	75.81	86.54	---	---	Average
5350.040	34.60	10.48	34.31	27.15	37.92	54.00	16.08	Average
5360.480	34.60	10.48	34.31	27.43	38.20	54.00	15.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

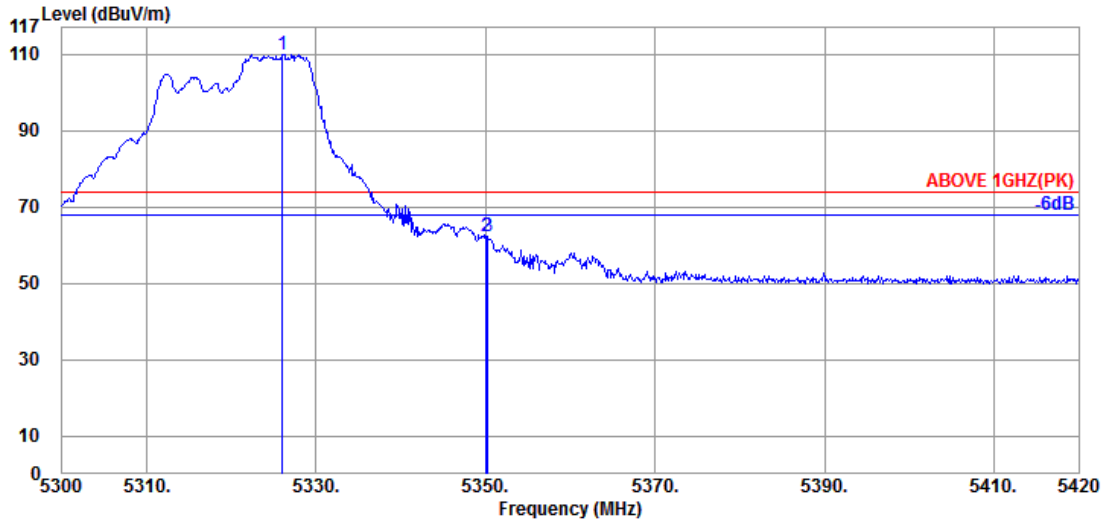

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.040	34.60	10.46	34.33	99.20	109.93	---	---	Peak
5350.040	34.60	10.48	34.31	51.33	62.10	74.00	11.90	Peak
5350.280	34.60	10.48	34.31	51.62	62.39	74.00	11.61	Peak

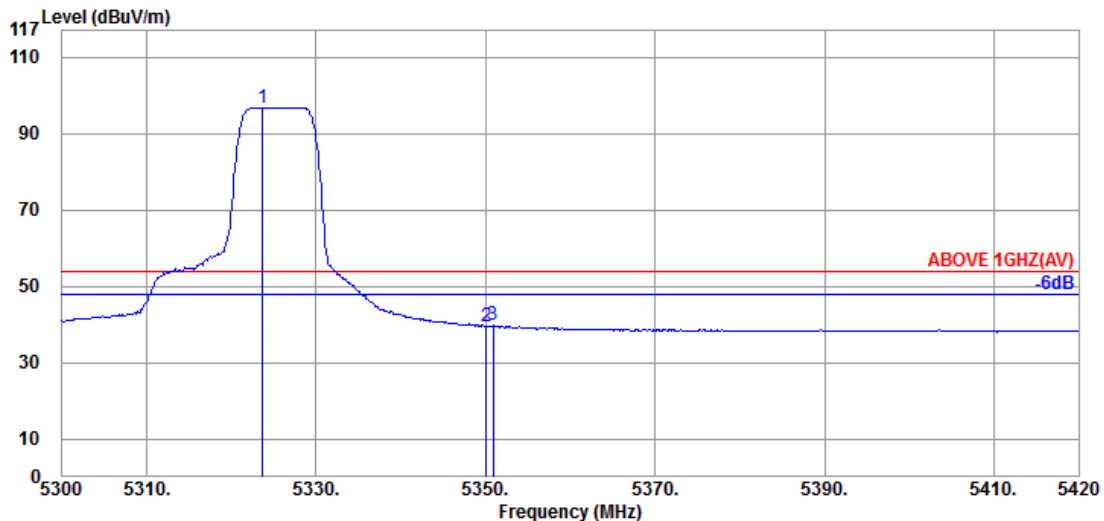


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.640	34.60	10.46	34.33	86.05	96.78	---	---	Average
5350.040	34.60	10.48	34.31	28.75	39.52	54.00	14.48	Average
5350.880	34.60	10.48	34.31	29.04	39.81	54.00	14.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

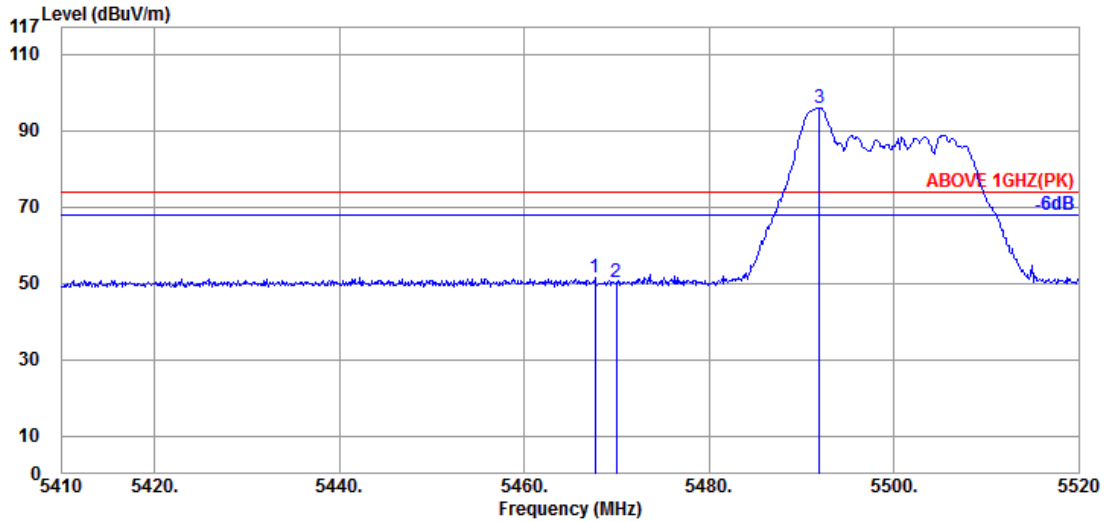

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.640	34.67	10.54	34.28	40.42	51.35	74.00	22.65	Peak
5469.950	34.67	10.54	34.28	39.48	50.41	74.00	23.59	Peak
@ 5491.950	34.63	10.55	34.27	85.07	95.98	---	---	Peak

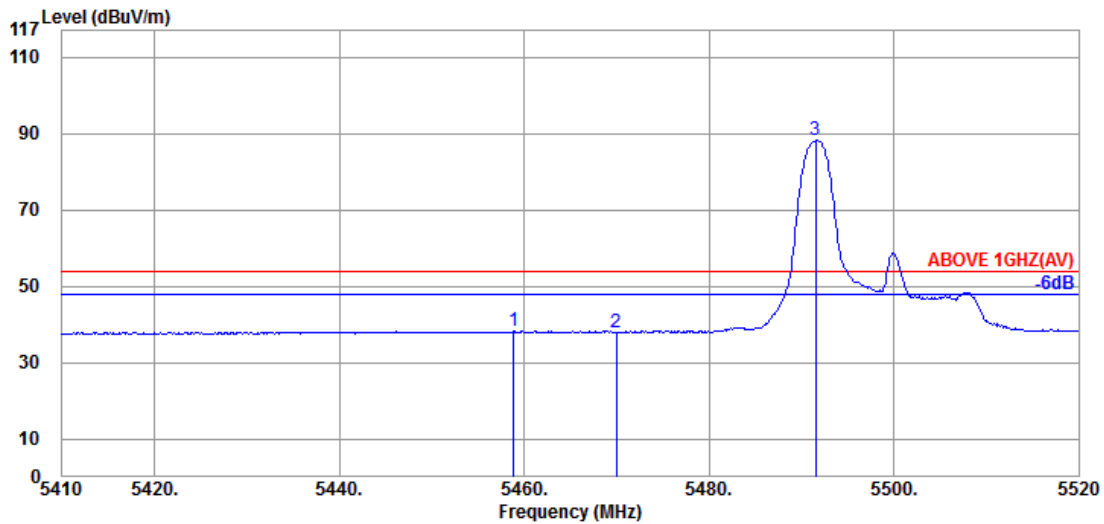


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.840	34.70	10.53	34.28	27.37	38.32	54.00	15.68	Average
5469.950	34.67	10.54	34.28	27.08	38.01	54.00	15.99	Average
@ 5491.510	34.63	10.55	34.27	77.20	88.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

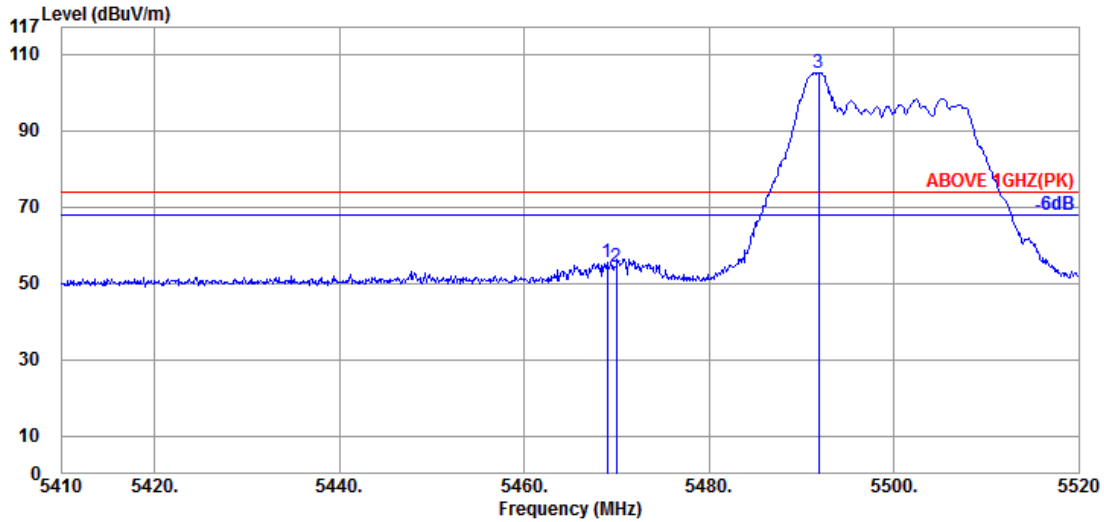

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.960	34.67	10.54	34.28	44.74	55.67	74.00	18.33	Peak
5469.950	34.67	10.54	34.28	43.47	54.40	74.00	19.60	Peak
@ 5491.840	34.63	10.55	34.27	94.26	105.17	---	---	Peak

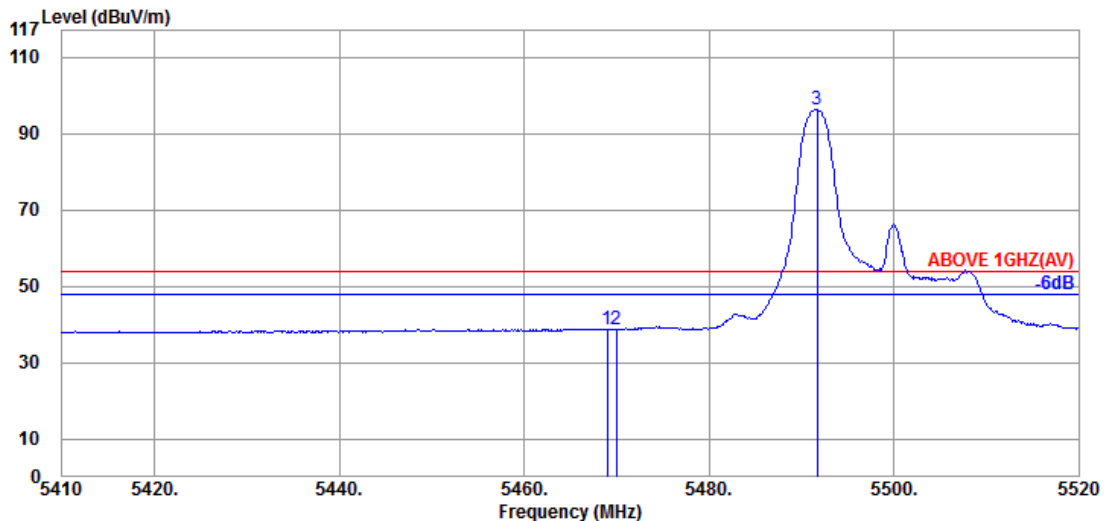


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.960	34.67	10.54	34.28	27.96	38.89	54.00	15.11	Average
5469.950	34.67	10.54	34.28	27.72	38.65	54.00	15.35	Average
@ 5491.730	34.63	10.55	34.27	85.25	96.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

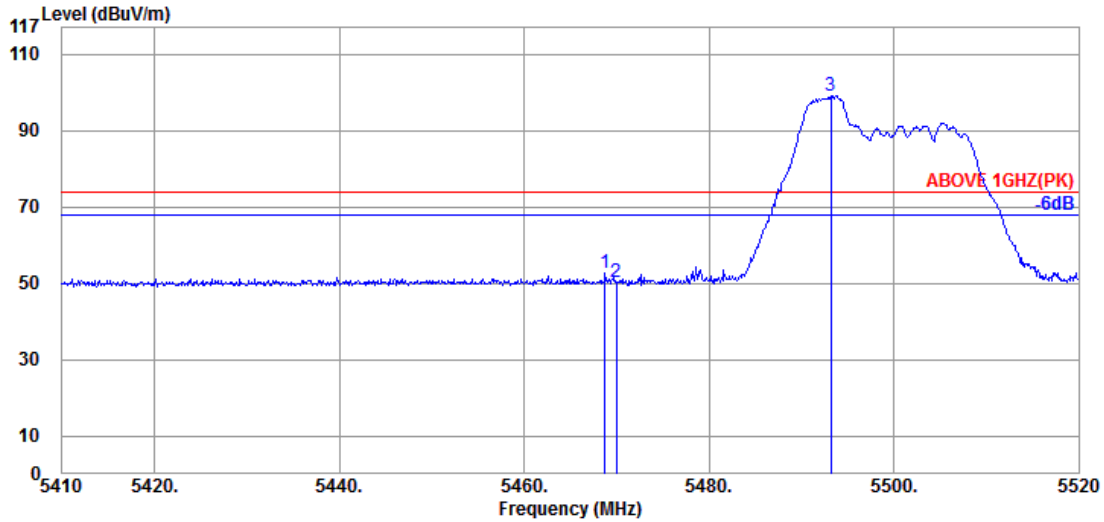

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.67	10.54	34.28	41.58	52.51	74.00	21.49	Peak
5469.950	34.67	10.54	34.28	39.44	50.37	74.00	23.63	Peak
@ 5493.160	34.63	10.55	34.27	88.17	99.08	---	---	Peak

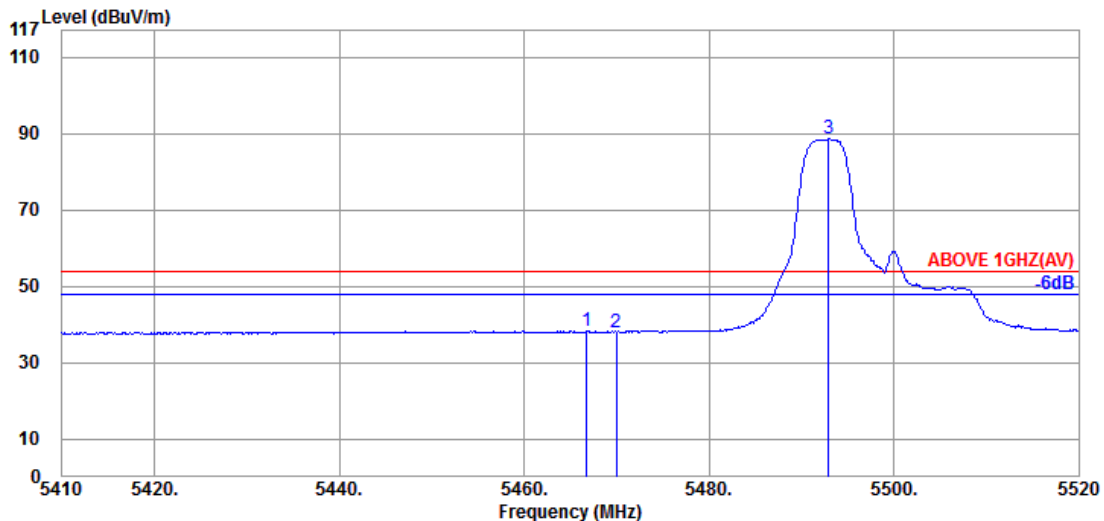


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.760	34.67	10.54	34.28	27.37	38.30	54.00	15.70	Average
5469.950	34.67	10.54	34.28	27.11	38.04	54.00	15.96	Average
@ 5492.940	34.63	10.55	34.27	77.57	88.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

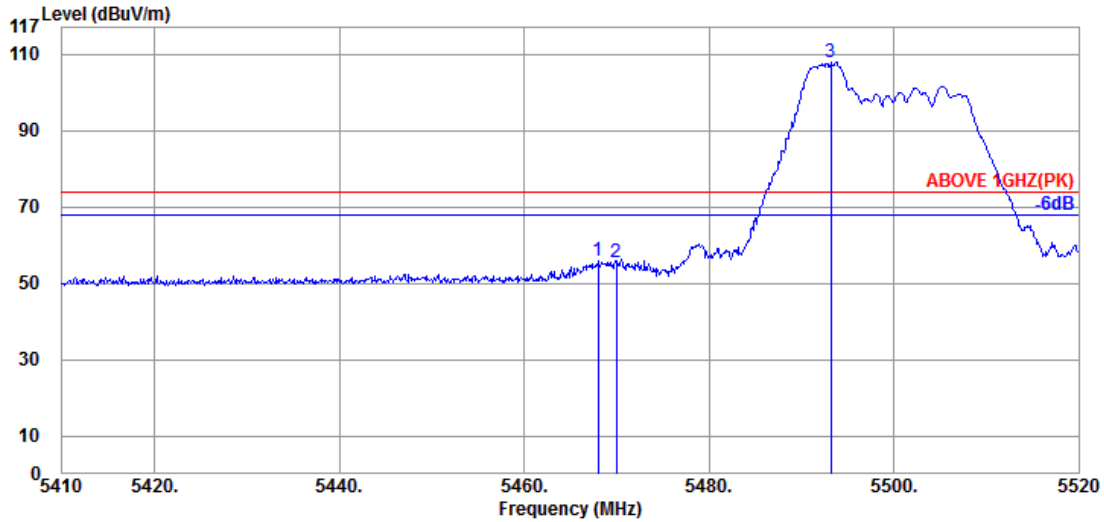

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.970	34.67	10.54	34.28	45.02	55.95	74.00	18.05	Peak
5469.950	34.67	10.54	34.28	44.72	55.65	74.00	18.35	Peak
@ 5493.160	34.63	10.55	34.27	96.82	107.73	---	---	Peak

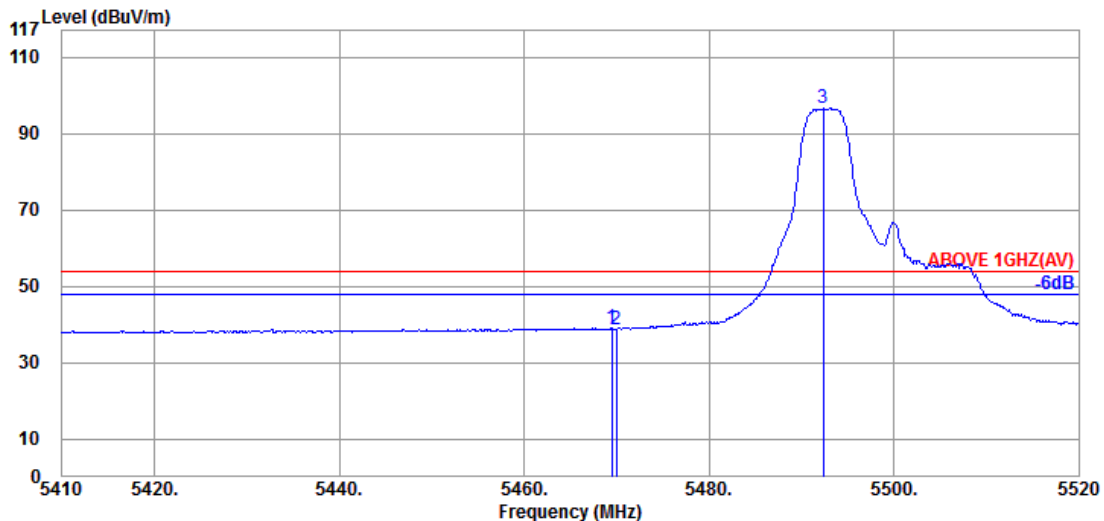


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.510	34.67	10.54	34.28	28.18	39.11	54.00	14.89	Average
5469.950	34.67	10.54	34.28	27.97	38.90	54.00	15.10	Average
@ 5492.390	34.63	10.55	34.27	85.62	96.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

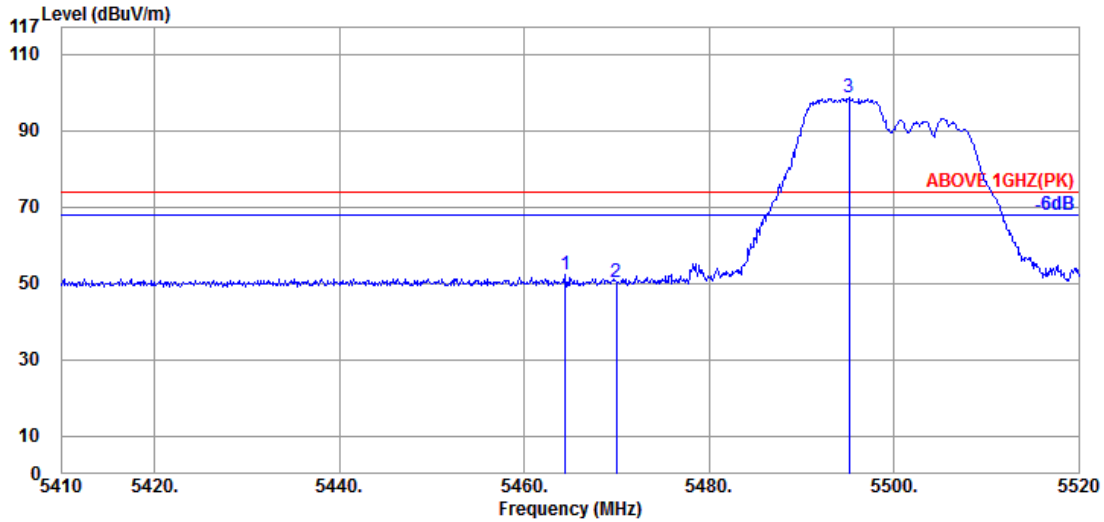

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.67	10.54	34.28	41.51	52.44	74.00	21.56	Peak
5469.950	34.67	10.54	34.28	39.25	50.18	74.00	23.82	Peak
@ 5495.140	34.63	10.55	34.27	87.91	98.82	---	---	Peak

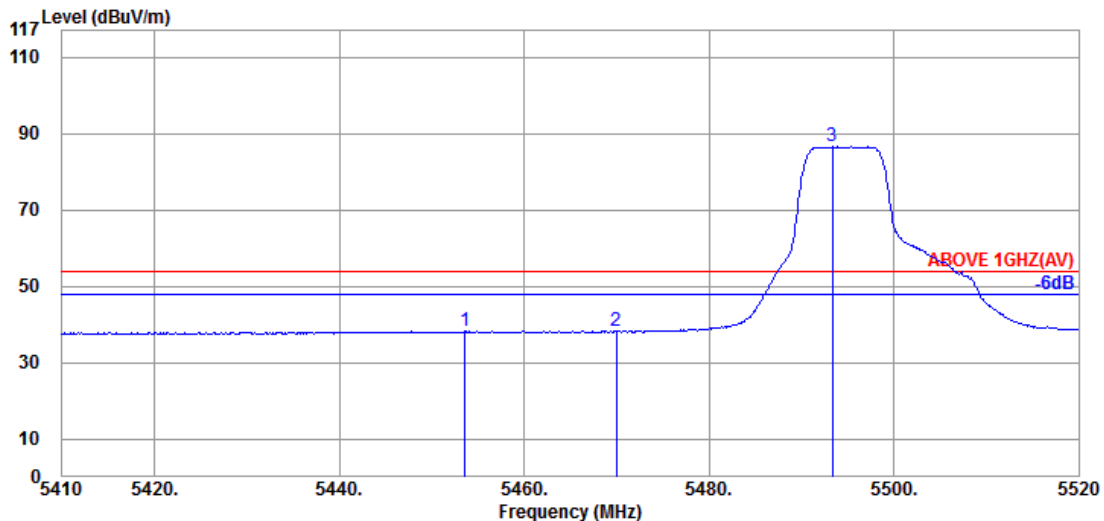


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.560	34.70	10.53	34.28	27.43	38.38	54.00	15.62	Average
5469.950	34.67	10.54	34.28	27.39	38.32	54.00	15.68	Average
@ 5493.380	34.63	10.55	34.27	75.59	86.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

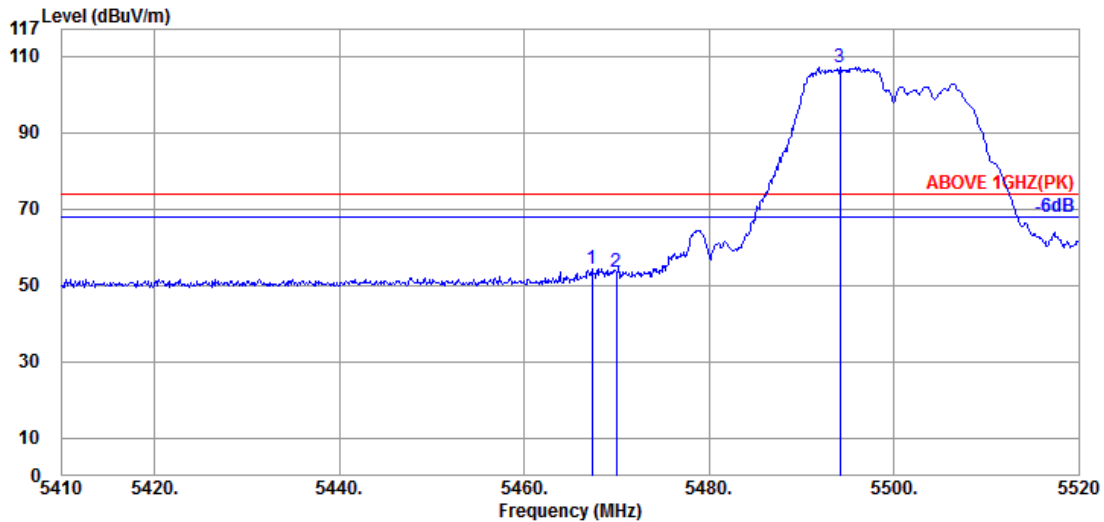

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.310	34.67	10.54	34.28	43.41	54.34	74.00	19.66	Peak
5469.950	34.67	10.54	34.28	42.55	53.48	74.00	20.52	Peak
@ 5494.150	34.63	10.55	34.27	96.25	107.16	---	---	Peak

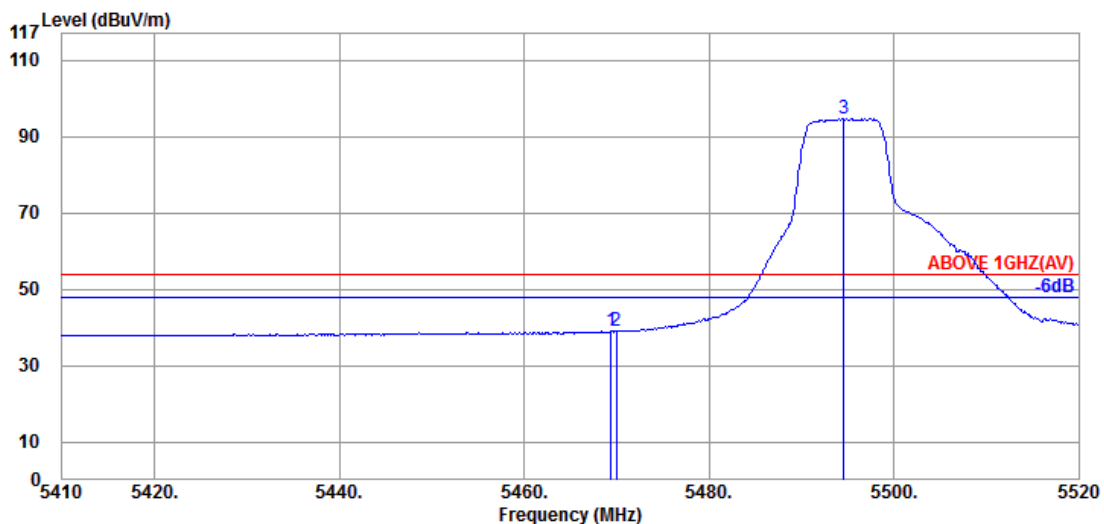


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.67	10.54	34.28	28.21	39.14	54.00	14.86	Average
5469.950	34.67	10.54	34.28	28.11	39.04	54.00	14.96	Average
@ 5494.590	34.63	10.55	34.27	83.72	94.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/8	Frequency	TX 5700MHz

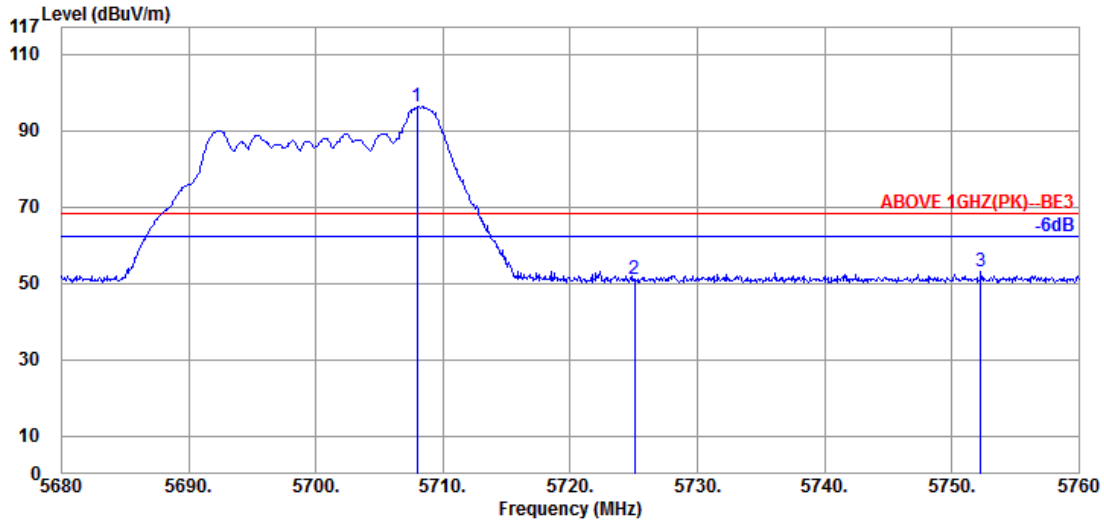

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.920	34.80	10.82	34.37	84.89	96.14	---	---	Peak
5725.040	34.80	10.84	34.37	39.66	50.93	68.20	17.27	Peak
5752.320	34.80	10.89	34.39	41.98	53.28	68.20	14.92	Peak

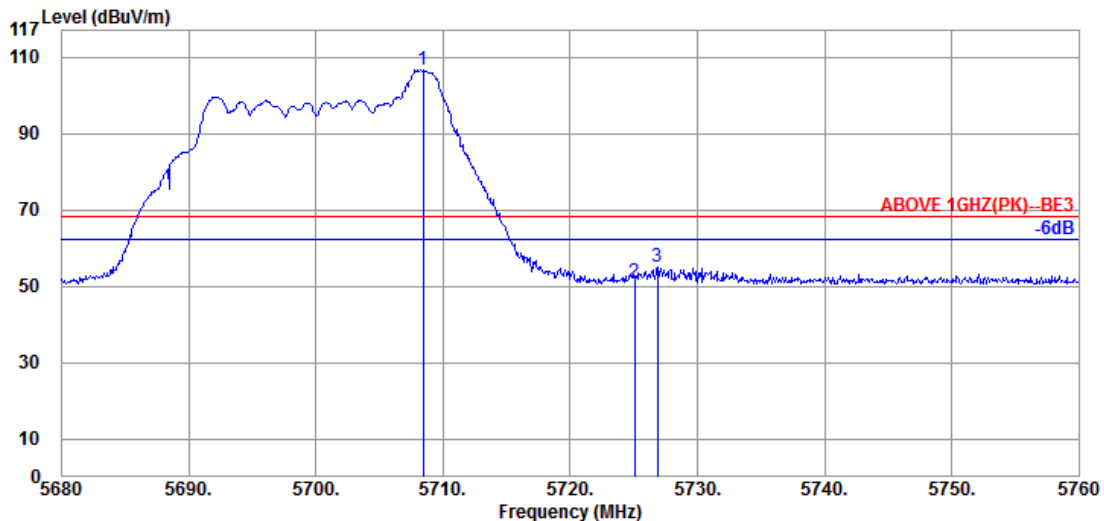


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.400	34.80	10.82	34.37	95.45	106.70	---	---	Peak
5725.040	34.80	10.84	34.37	39.91	51.18	68.20	17.02	Peak
5726.880	34.80	10.84	34.38	44.05	55.31	68.20	12.89	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/40	Frequency	TX 5700MHz

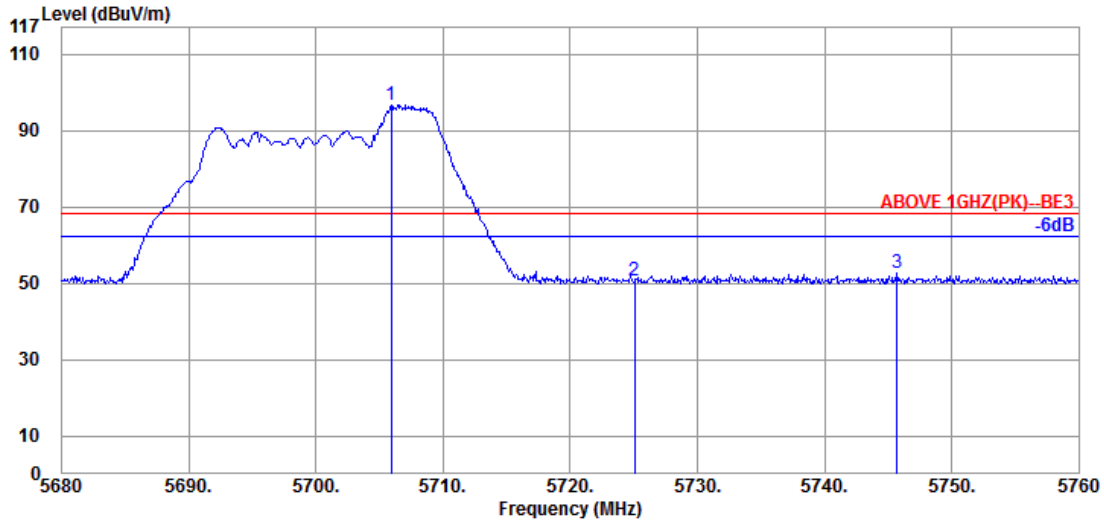

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.920	34.80	10.82	34.36	85.32	96.58	---	---	Peak
5725.040	34.80	10.84	34.37	39.53	50.80	68.20	17.40	Peak
5745.680	34.80	10.86	34.39	41.32	52.59	68.20	15.61	Peak

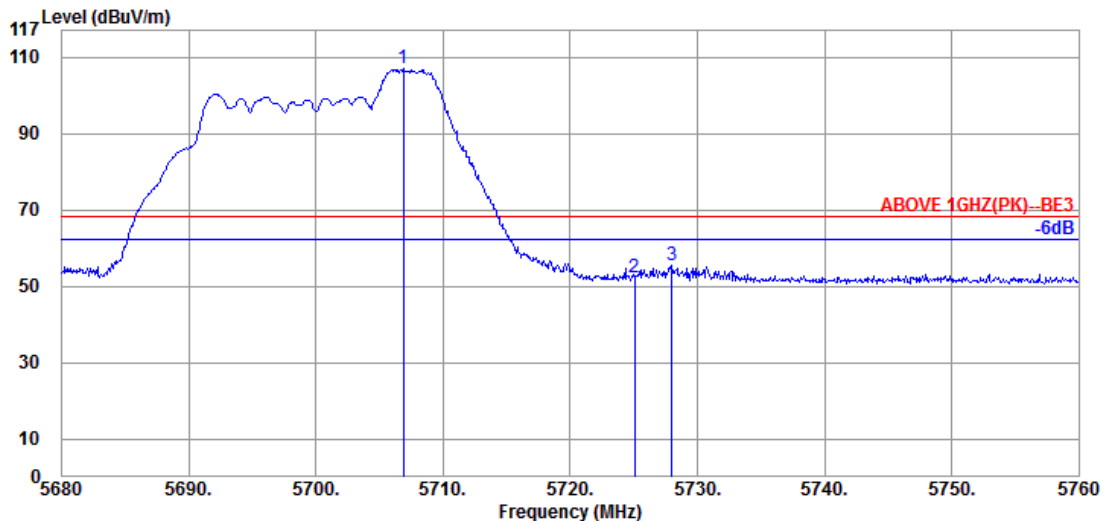


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.880	34.80	10.82	34.36	95.60	106.86	---	---	Peak
5725.040	34.80	10.84	34.37	41.09	52.36	68.20	15.84	Peak
5728.000	34.80	10.84	34.38	44.10	55.36	68.20	12.84	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/54	Frequency	TX 5700MHz

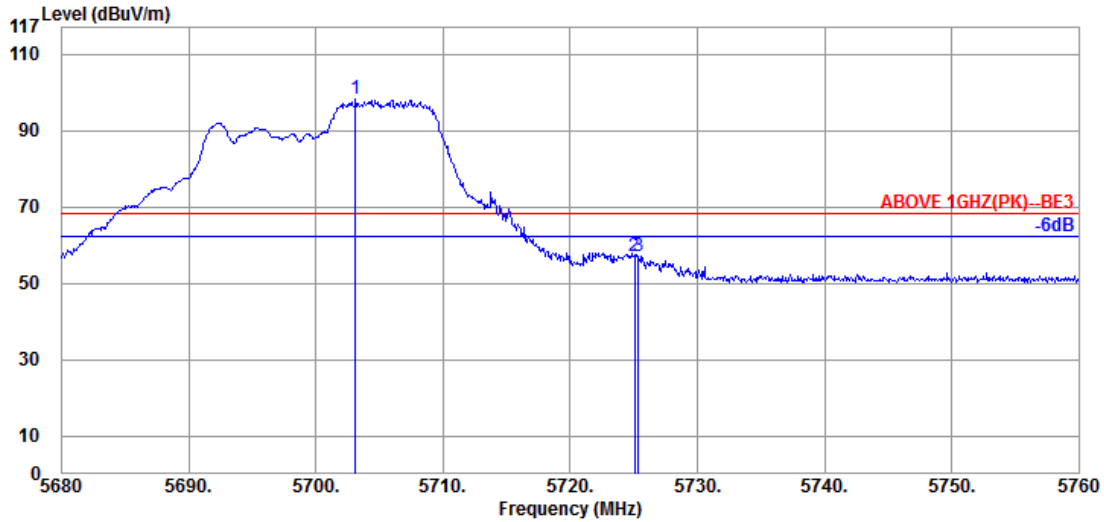

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.120	34.80	10.82	34.36	86.84	98.10	---	---	Peak
5725.040	34.80	10.84	34.37	45.83	57.10	68.20	11.10	Peak
5725.360	34.80	10.84	34.37	45.99	57.26	68.20	10.94	Peak

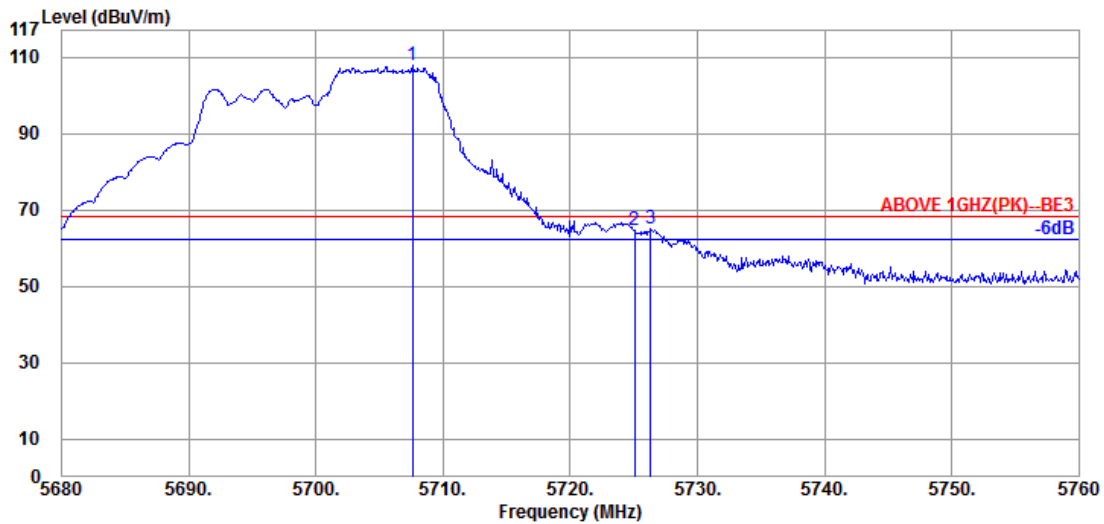


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.600	34.80	10.82	34.36	96.54	107.80	---	---	Peak
5725.040	34.80	10.84	34.37	53.38	64.65	68.20	3.55	Peak
5726.320	34.80	10.84	34.37	53.72	64.99	68.20	3.21	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

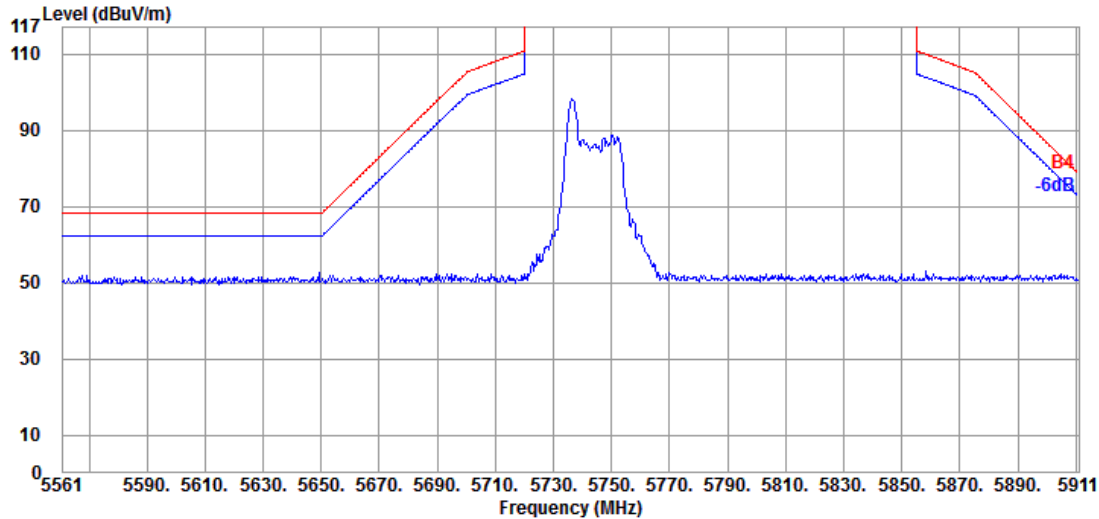


Antenna at Vertical Polarization

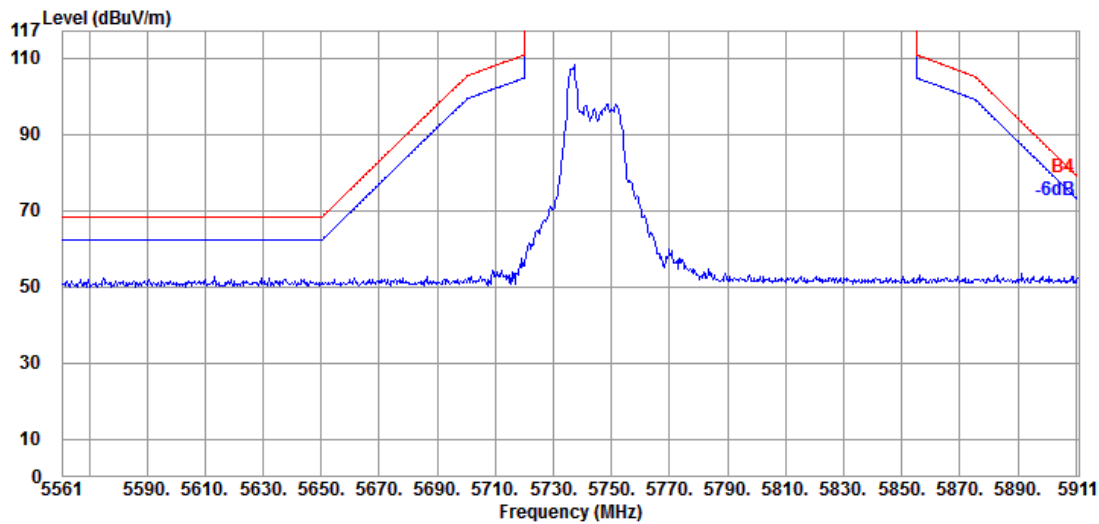


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

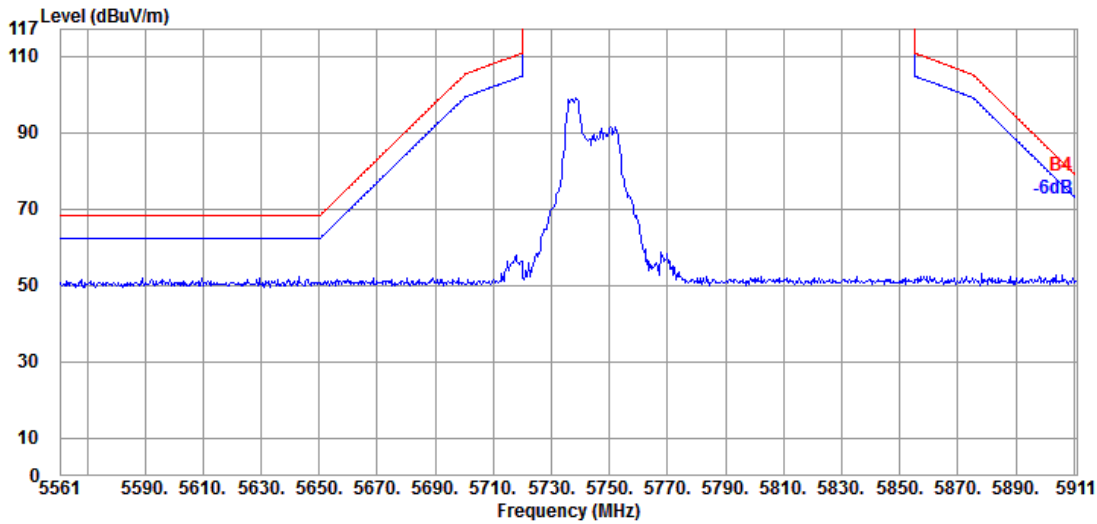


Antenna at Vertical Polarization

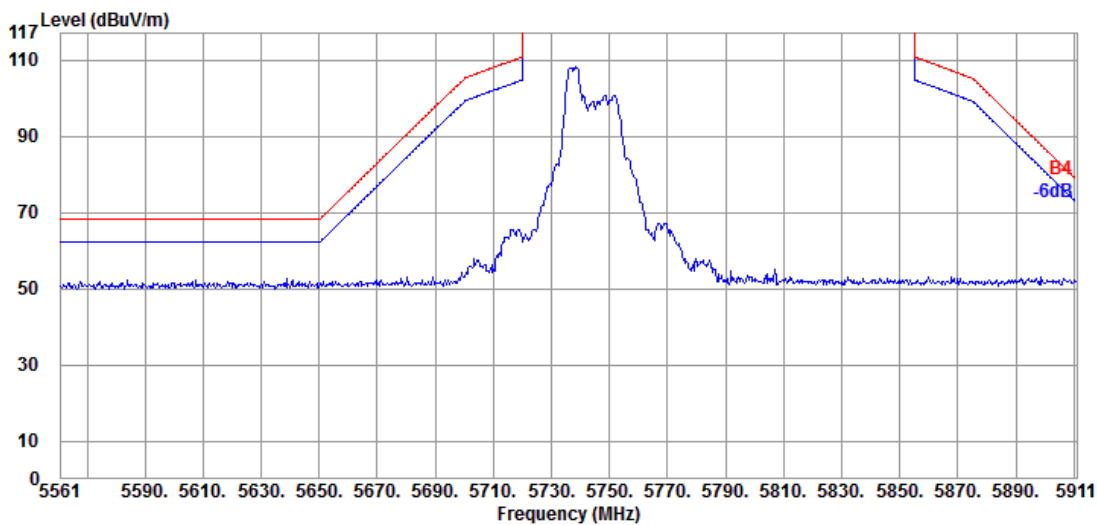


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

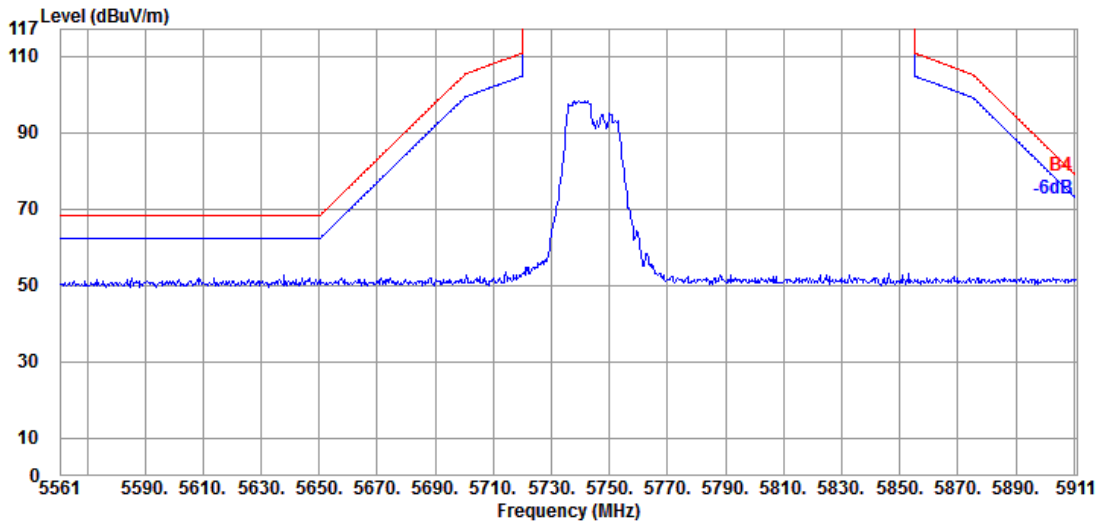


Antenna at Vertical Polarization

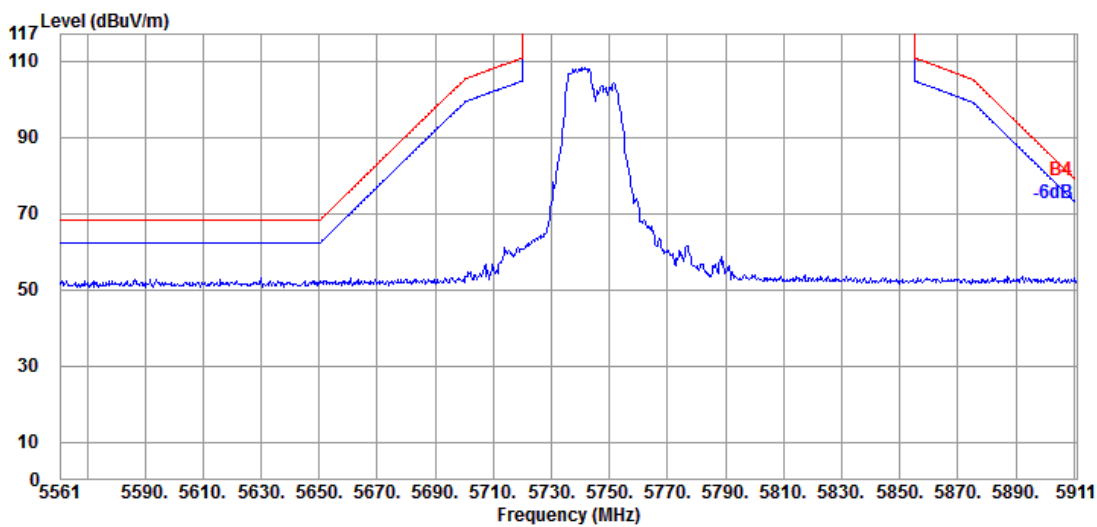


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

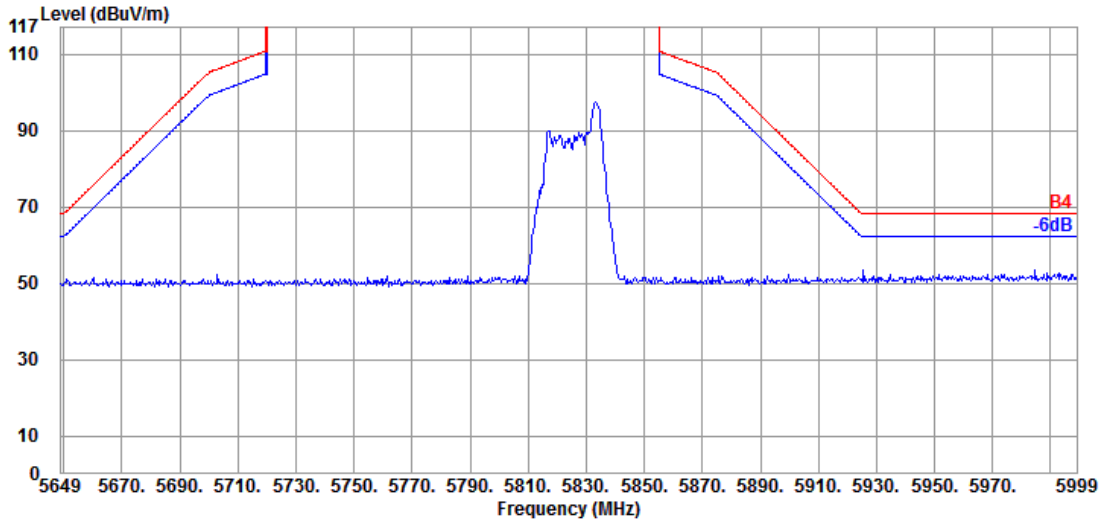


Antenna at Vertical Polarization

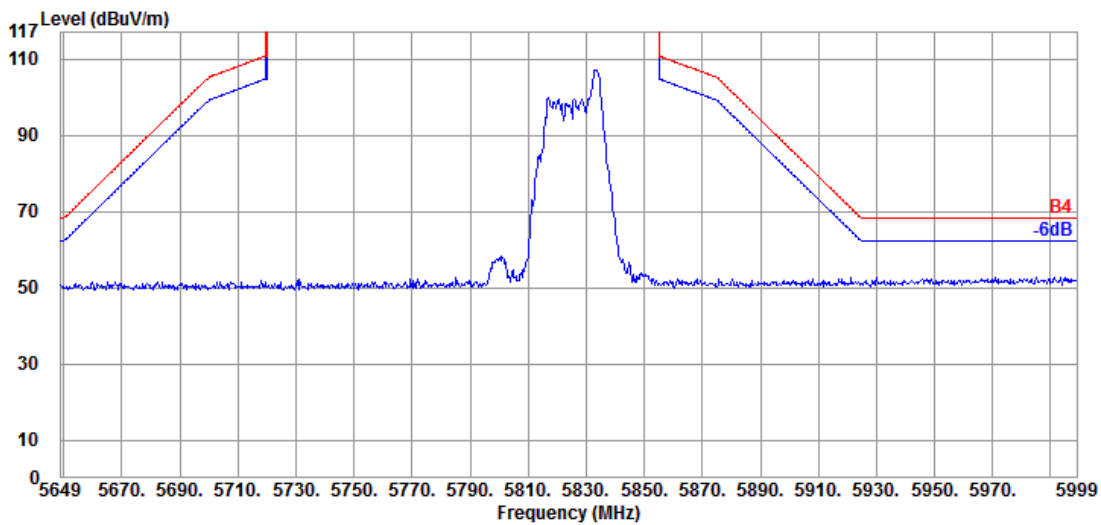


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

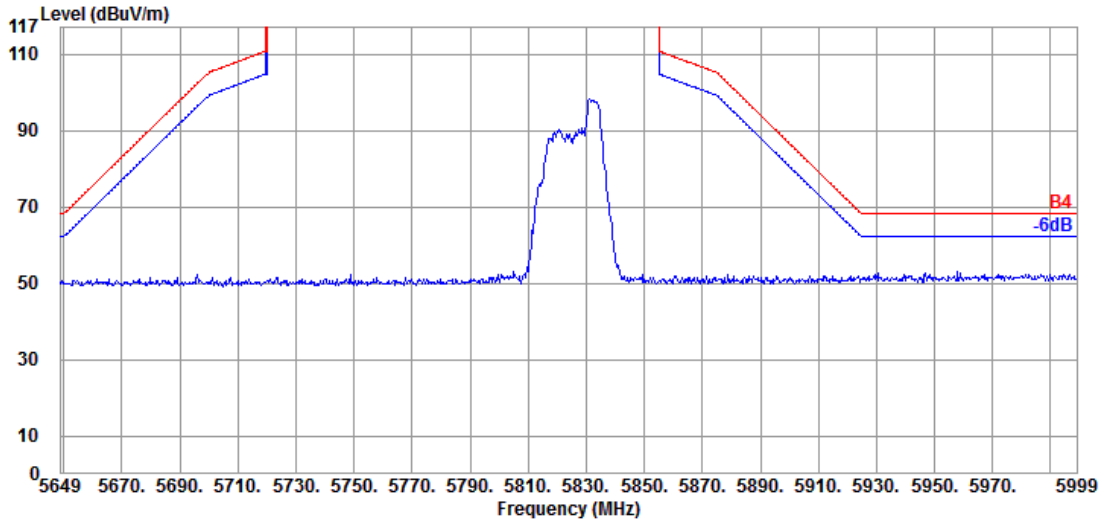


Antenna at Vertical Polarization

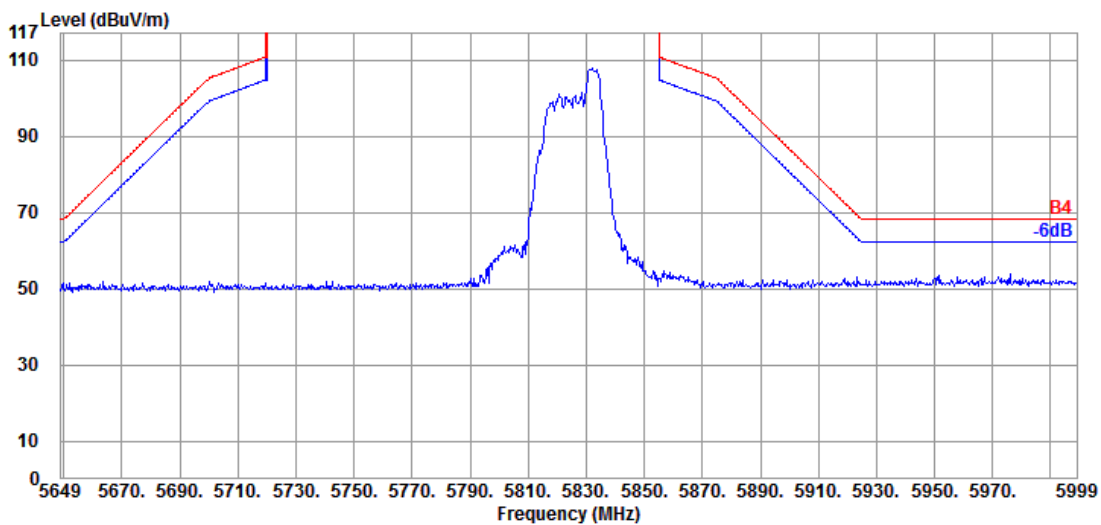


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

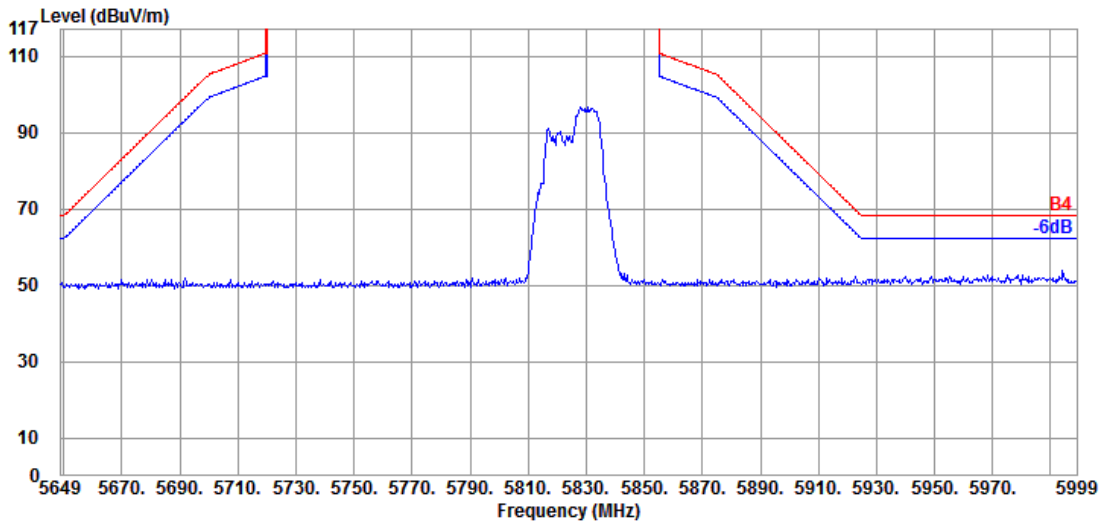

Antenna at Vertical Polarization

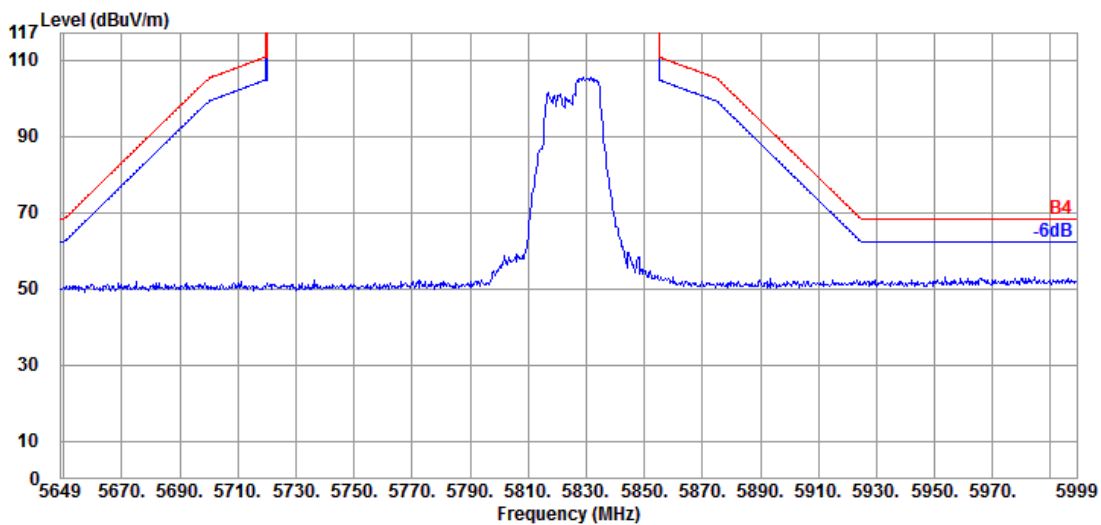


Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

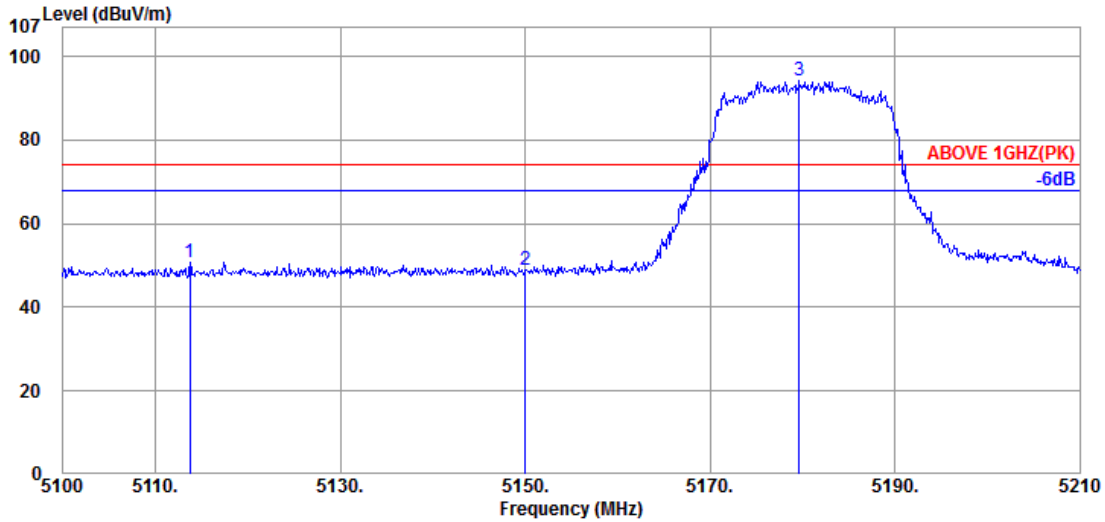

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.750	34.33	10.35	34.39	40.35	50.64	74.00	23.36	Peak
5150.050	34.40	10.36	34.38	38.49	48.87	74.00	25.13	Peak
@ 5179.640	34.47	10.38	34.37	83.77	94.25	---	---	Peak

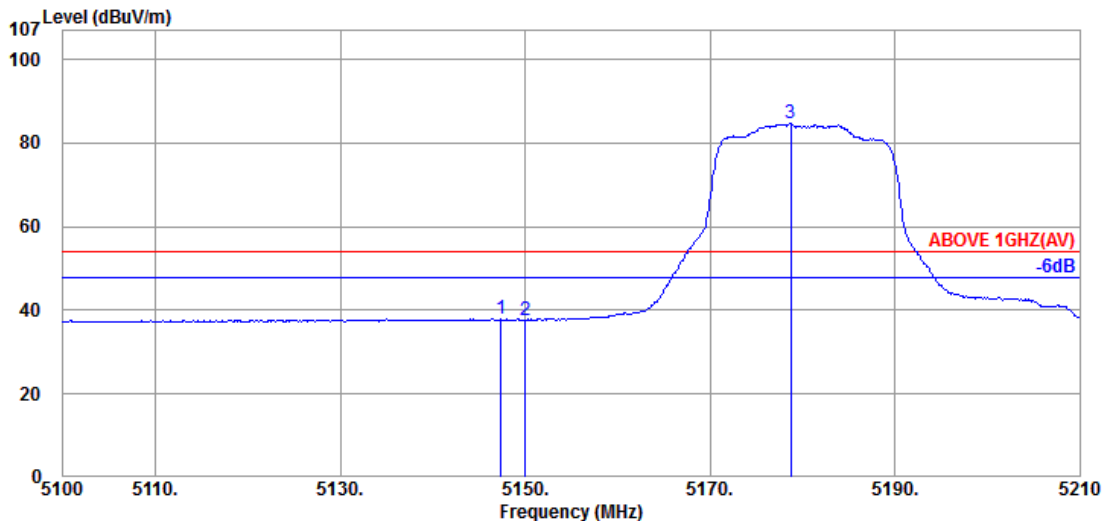


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.410	34.40	10.36	34.38	27.48	37.86	54.00	16.14	Average
5150.050	34.40	10.36	34.38	27.36	37.74	54.00	16.26	Average
@ 5178.760	34.47	10.38	34.37	74.20	84.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

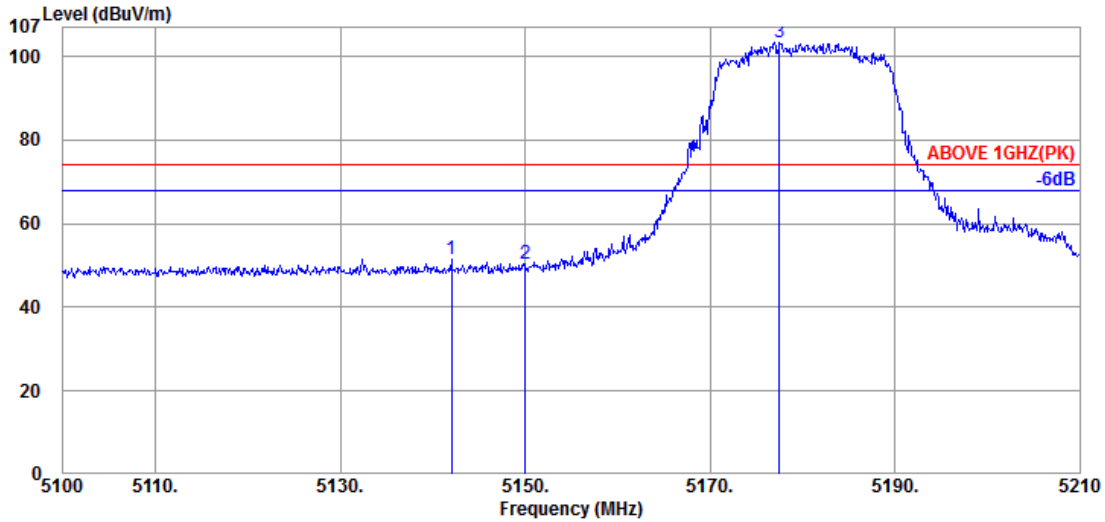

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.020	34.40	10.36	34.38	41.16	51.54	74.00	22.46	Peak
5150.050	34.40	10.36	34.38	39.98	50.36	74.00	23.64	Peak
@ 5177.550	34.47	10.38	34.37	92.97	103.45	---	---	Peak

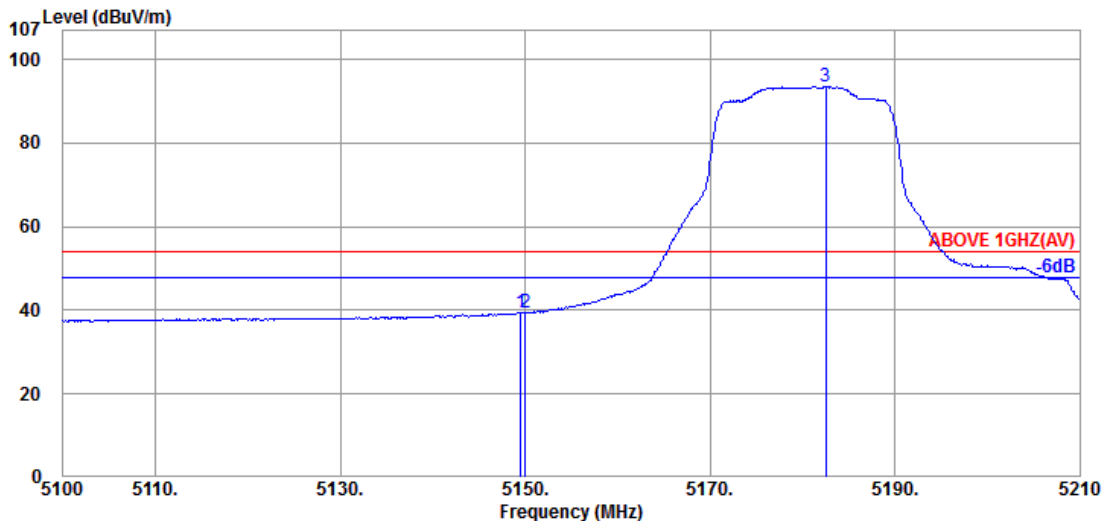


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.40	10.36	34.38	29.21	39.59	54.00	14.41	Average
5150.050	34.40	10.36	34.38	29.06	39.44	54.00	14.56	Average
@ 5182.500	34.47	10.38	34.37	83.14	93.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

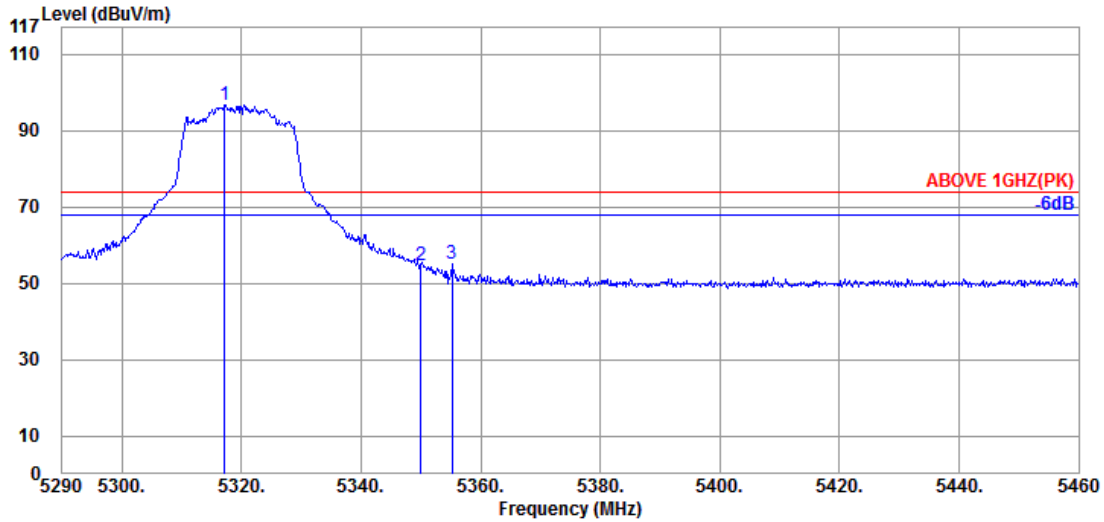

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.60	10.46	34.33	86.02	96.75	---	---	Peak
5350.010	34.60	10.48	34.31	43.92	54.69	74.00	19.31	Peak
5355.280	34.60	10.48	34.31	44.25	55.02	74.00	18.98	Peak

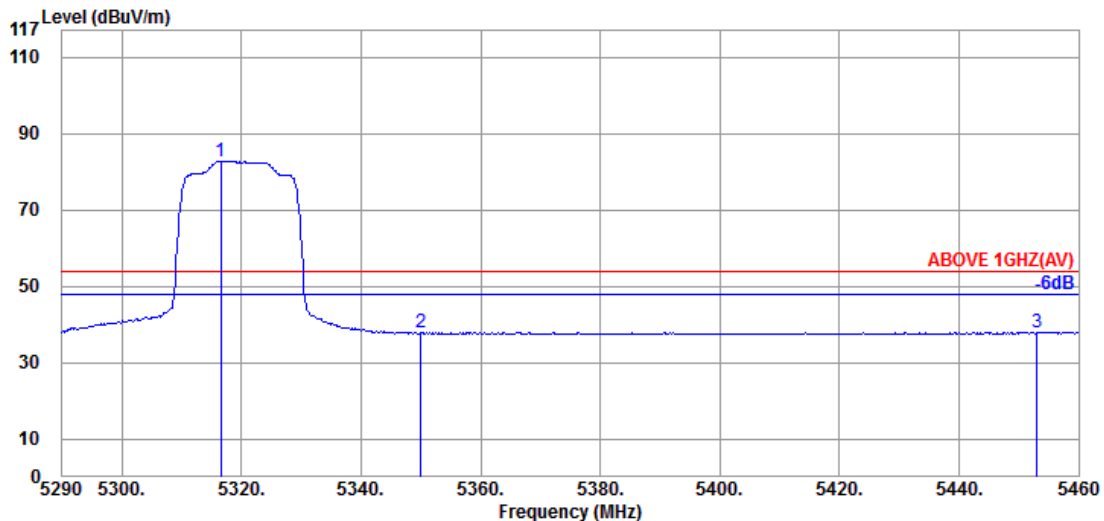


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.520	34.60	10.46	34.33	72.07	82.80	---	---	Average
5350.010	34.60	10.48	34.31	27.02	37.79	54.00	16.21	Average
5453.030	34.70	10.53	34.28	27.14	38.09	54.00	15.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

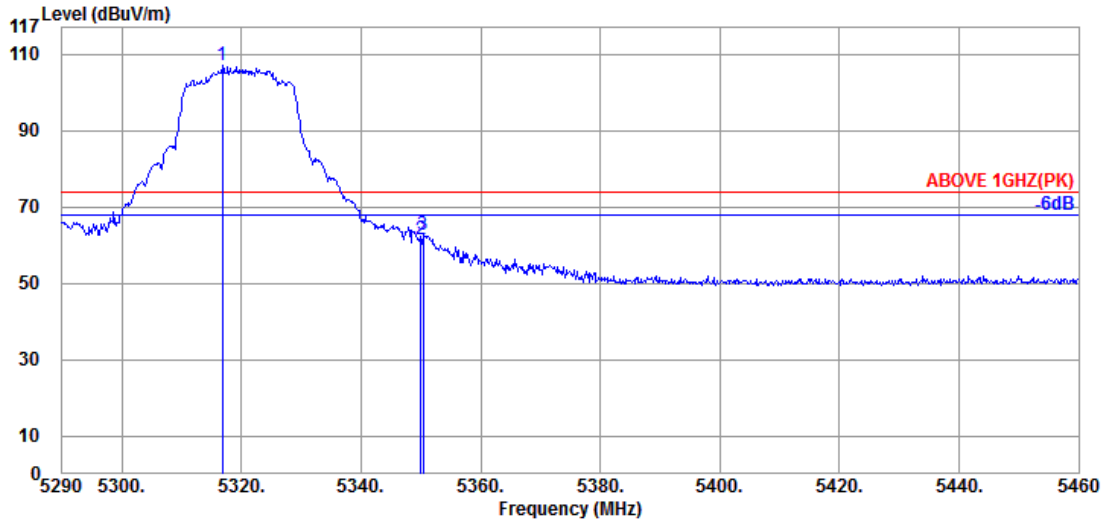

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.860	34.60	10.46	34.33	96.20	106.93	---	---	Peak
5350.010	34.60	10.48	34.31	50.73	61.50	74.00	12.50	Peak
5350.350	34.60	10.48	34.31	51.78	62.55	74.00	11.45	Peak

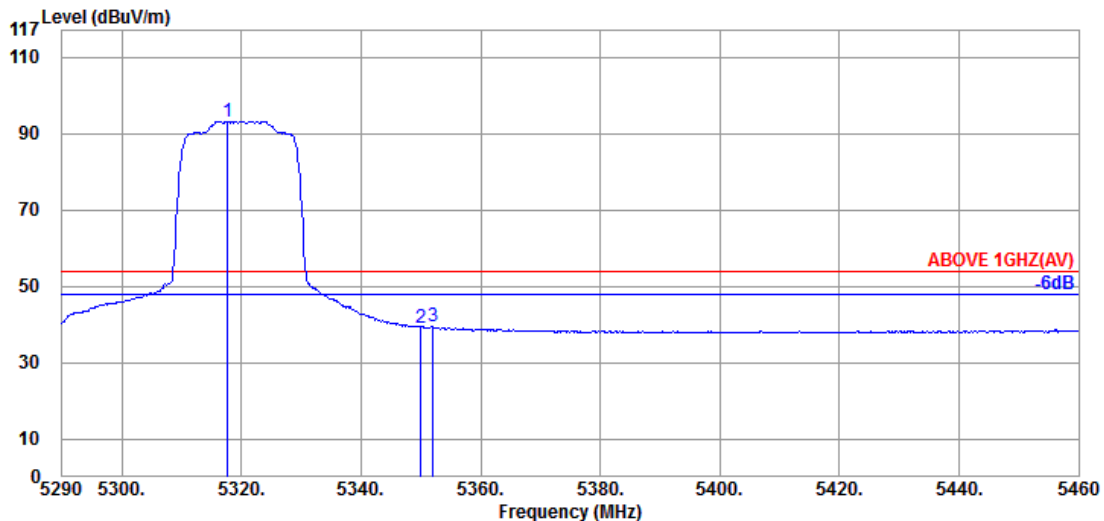


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.710	34.60	10.46	34.33	82.48	93.21	---	---	Average
5350.010	34.60	10.48	34.31	28.54	39.31	54.00	14.69	Average
5352.050	34.60	10.48	34.31	28.66	39.43	54.00	14.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

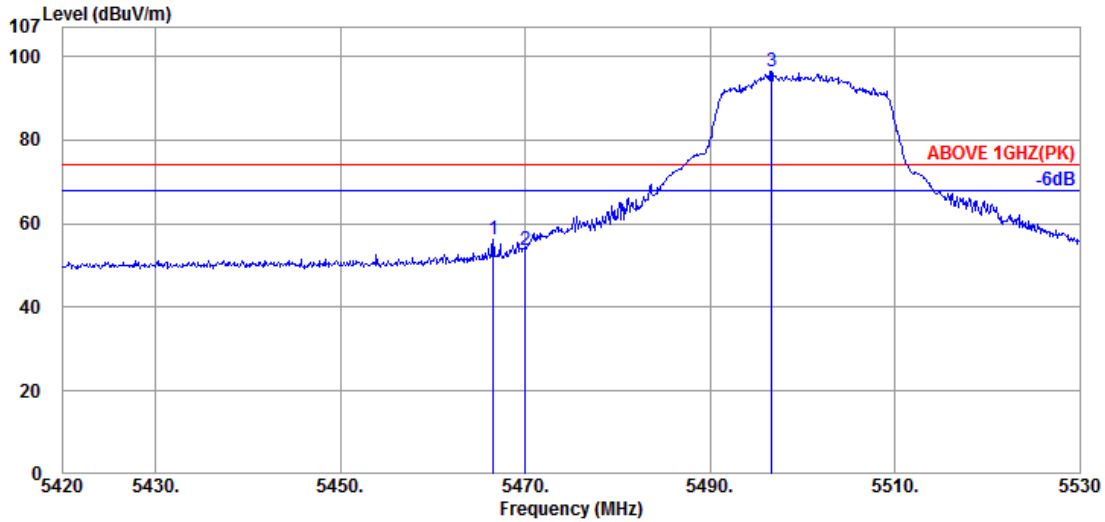

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.530	34.67	10.54	34.28	45.36	56.29	74.00	17.71	Peak
5470.050	34.67	10.54	34.28	42.93	53.86	74.00	20.14	Peak
@ 5496.670	34.60	10.56	34.27	85.60	96.49	---	---	Peak

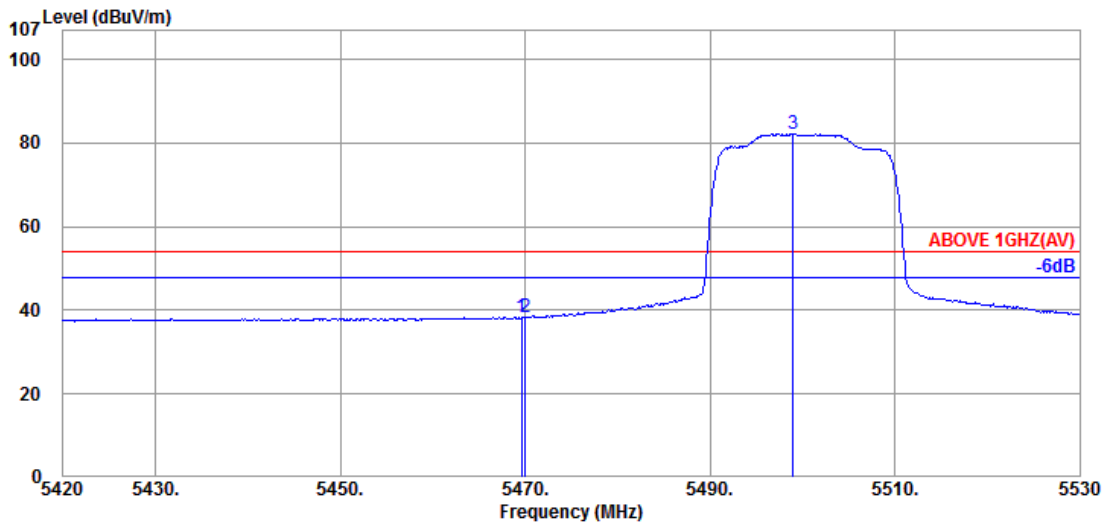


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.610	34.67	10.54	34.28	27.35	38.28	54.00	15.72	Average
5470.050	34.67	10.54	34.28	27.30	38.23	54.00	15.77	Average
@ 5498.980	34.60	10.56	34.27	71.24	82.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

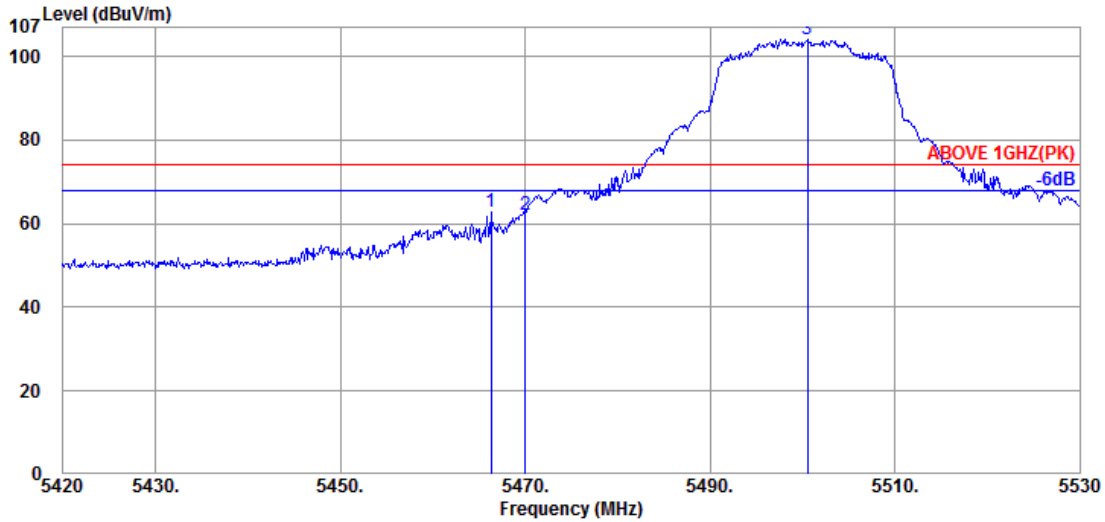

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.310	34.67	10.54	34.28	51.95	62.88	74.00	11.12	Peak
5470.050	34.67	10.54	34.28	51.04	61.97	74.00	12.03	Peak
@ 5500.520	34.60	10.56	34.27	93.31	104.20	---	---	Peak

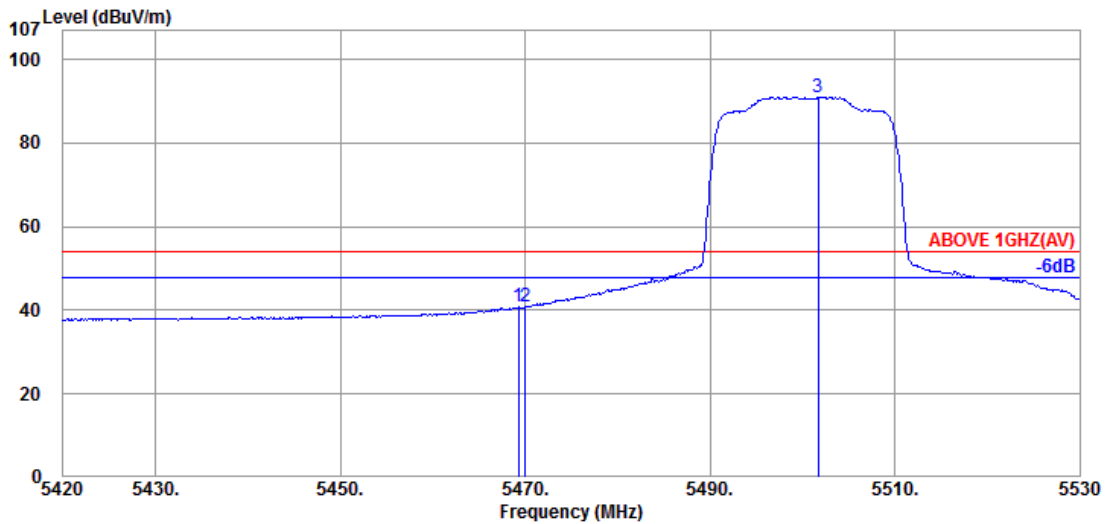


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.280	34.67	10.54	34.28	29.83	40.76	54.00	13.24	Average
5470.050	34.67	10.54	34.28	30.00	40.93	54.00	13.07	Average
@ 5501.730	34.60	10.56	34.27	80.12	91.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/62	Frequency	TX 5670MHz

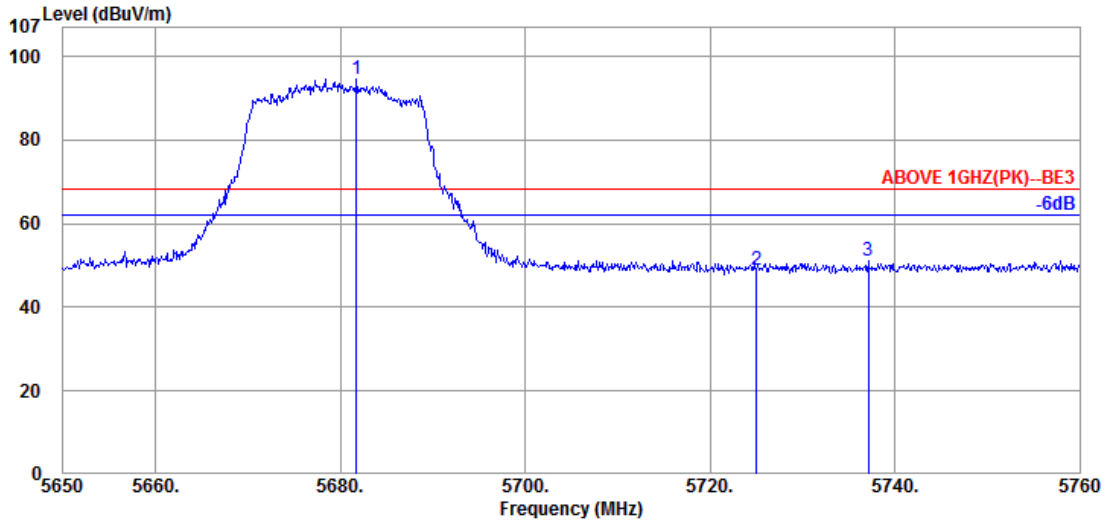

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.790	34.73	10.78	34.36	83.60	94.75	---	---	Peak
5725.020	34.80	10.84	34.37	37.64	48.91	68.20	19.29	Peak
5737.120	34.80	10.86	34.38	39.87	51.15	68.20	17.05	Peak

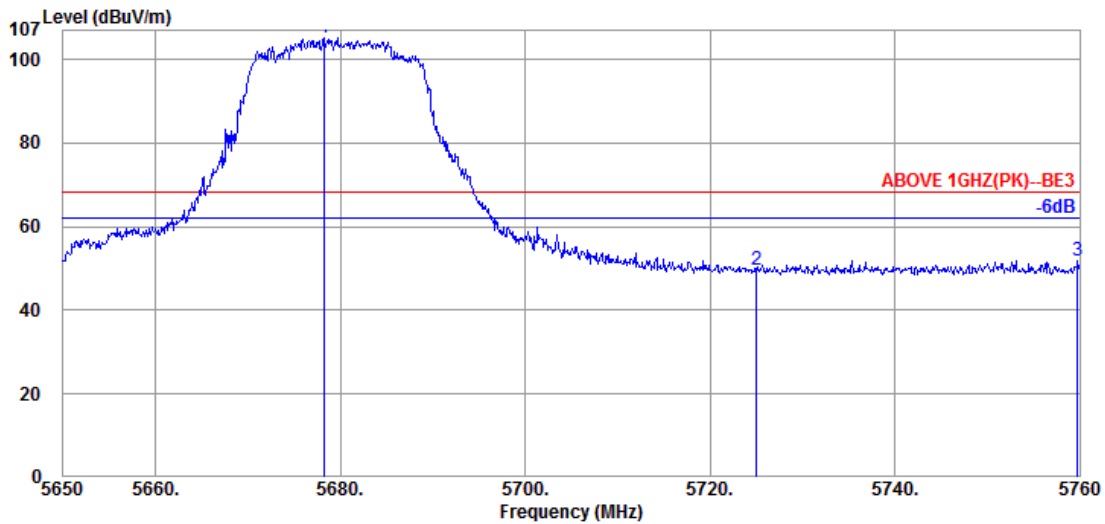


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.270	34.73	10.78	34.36	94.08	105.23	---	---	Peak
5725.020	34.80	10.84	34.37	38.56	49.83	68.20	18.37	Peak
5759.780	34.90	10.89	34.39	40.46	51.86	68.20	16.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

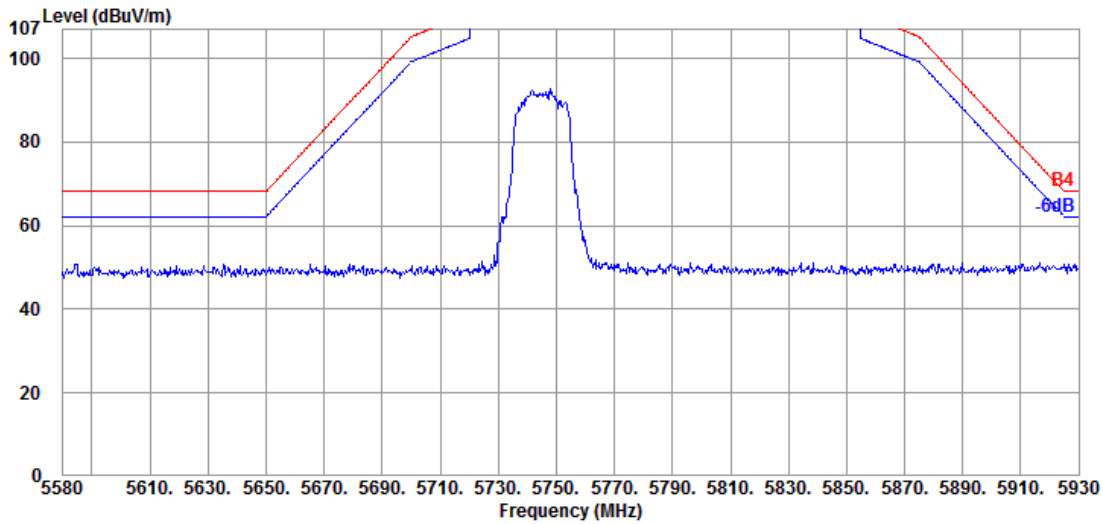


Antenna at Vertical Polarization

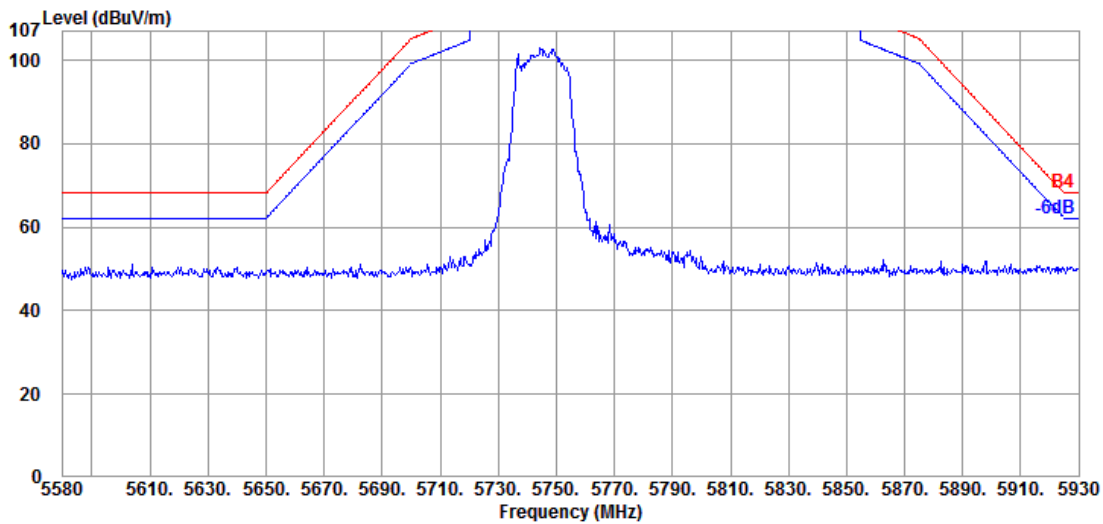


Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

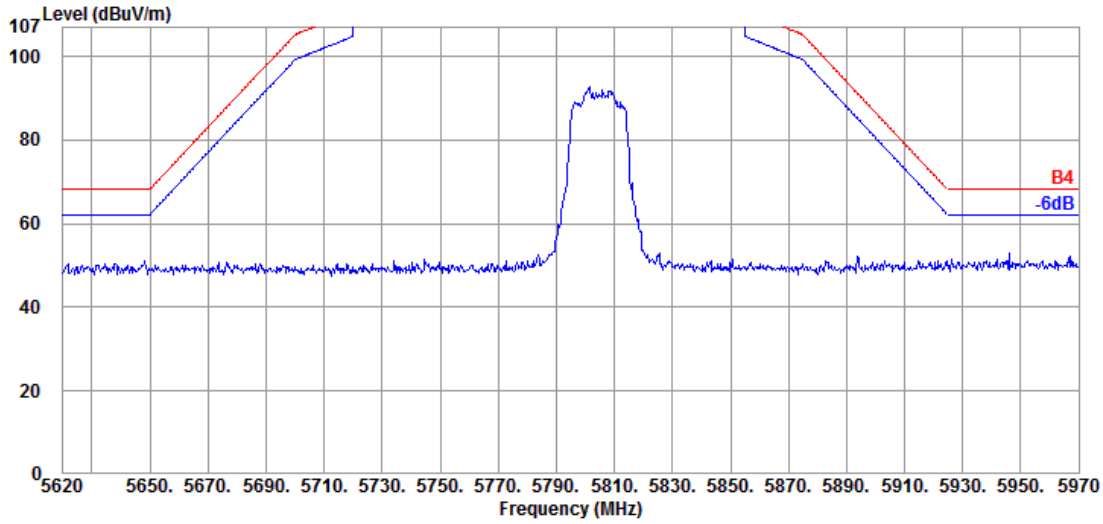

Antenna at Vertical Polarization

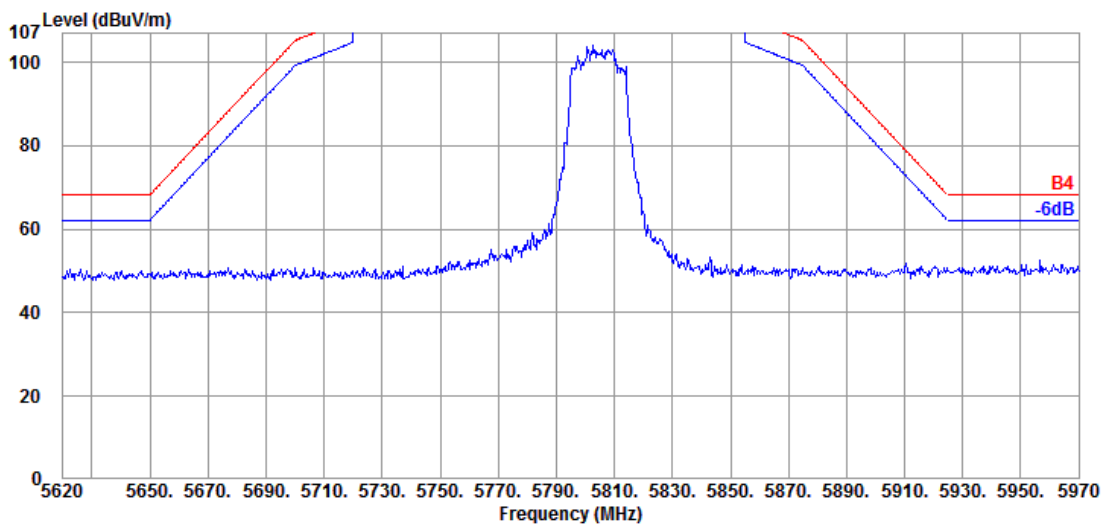


Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

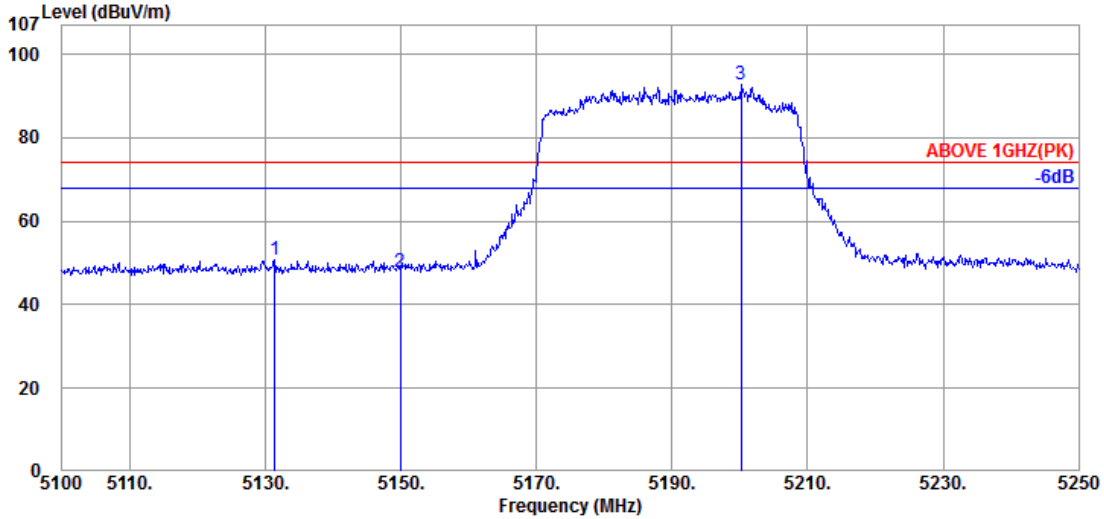

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.350	34.37	10.35	34.39	40.28	50.61	74.00	23.39	Peak
5149.950	34.40	10.36	34.38	37.63	48.01	74.00	25.99	Peak
@ 5200.200	34.50	10.39	34.36	82.34	92.87	---	---	Peak

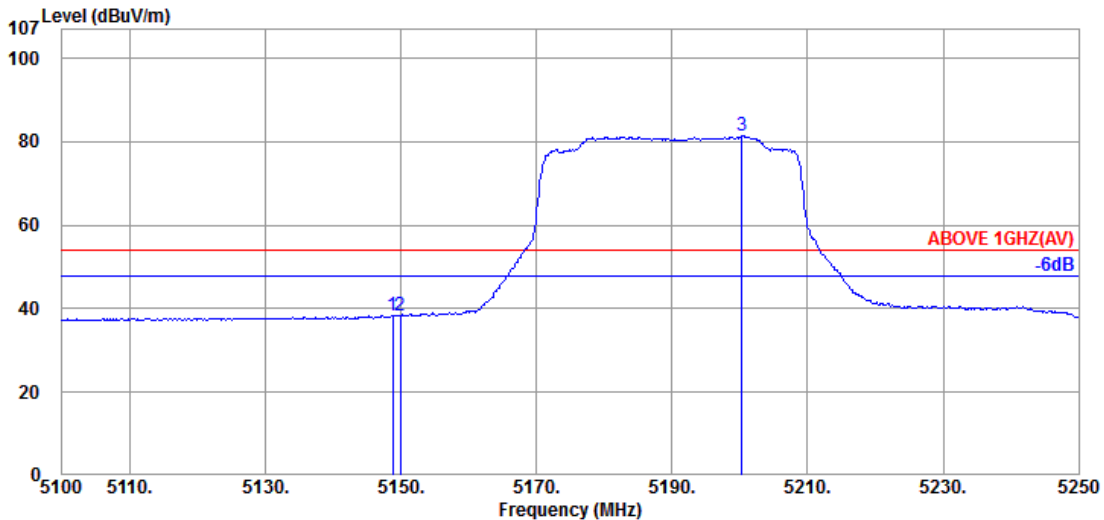


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.40	10.36	34.38	27.90	38.28	54.00	15.72	Average
5149.950	34.40	10.36	34.38	27.84	38.22	54.00	15.78	Average
@ 5200.350	34.50	10.39	34.36	70.83	81.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

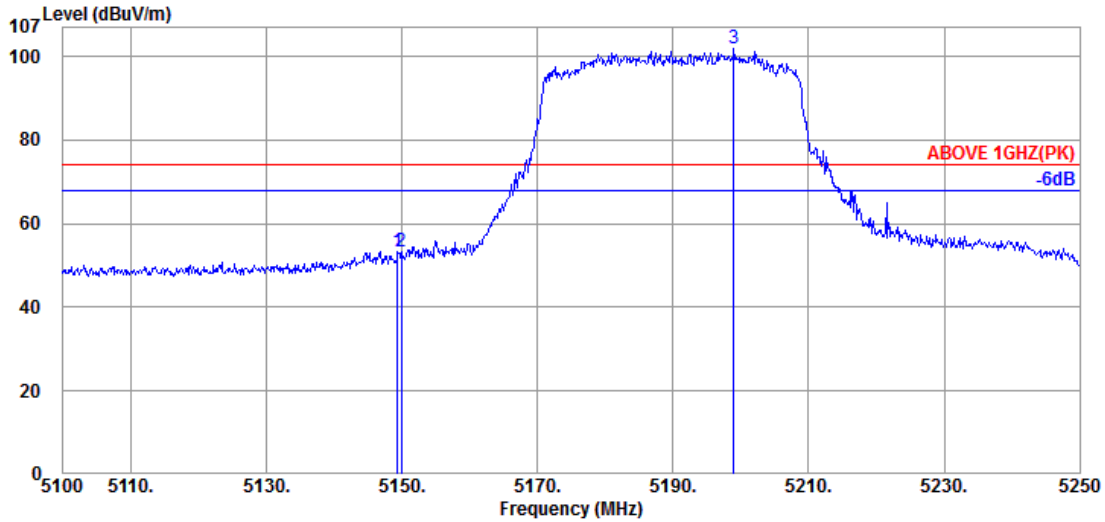

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.40	10.36	34.38	42.92	53.30	74.00	20.70	Peak
5149.950	34.40	10.36	34.38	43.05	53.43	74.00	20.57	Peak
@ 5199.000	34.50	10.39	34.36	91.26	101.79	---	---	Peak

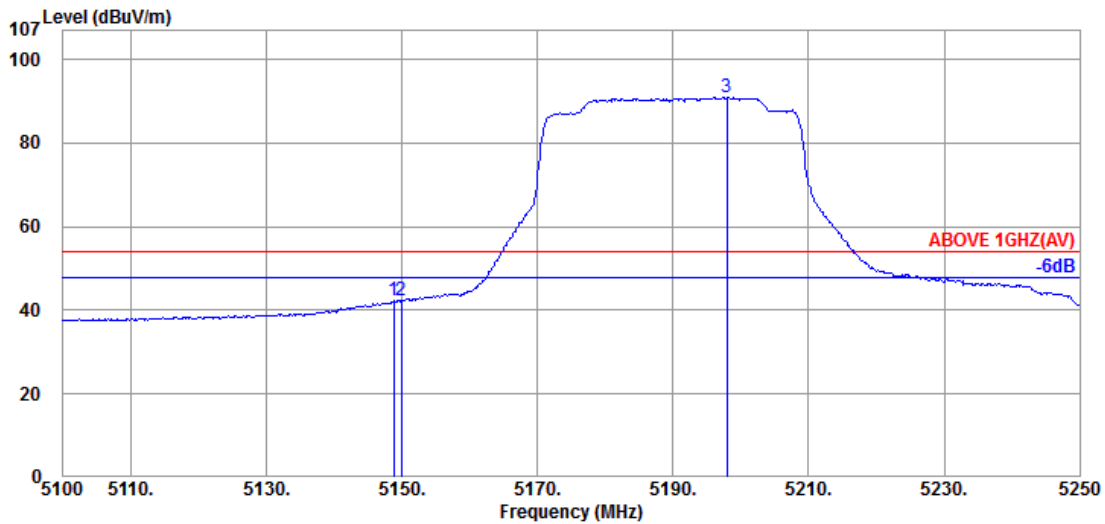


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.40	10.36	34.38	31.87	42.25	54.00	11.75	Average
5149.950	34.40	10.36	34.38	31.82	42.20	54.00	11.80	Average
@ 5197.950	34.50	10.39	34.36	80.40	90.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

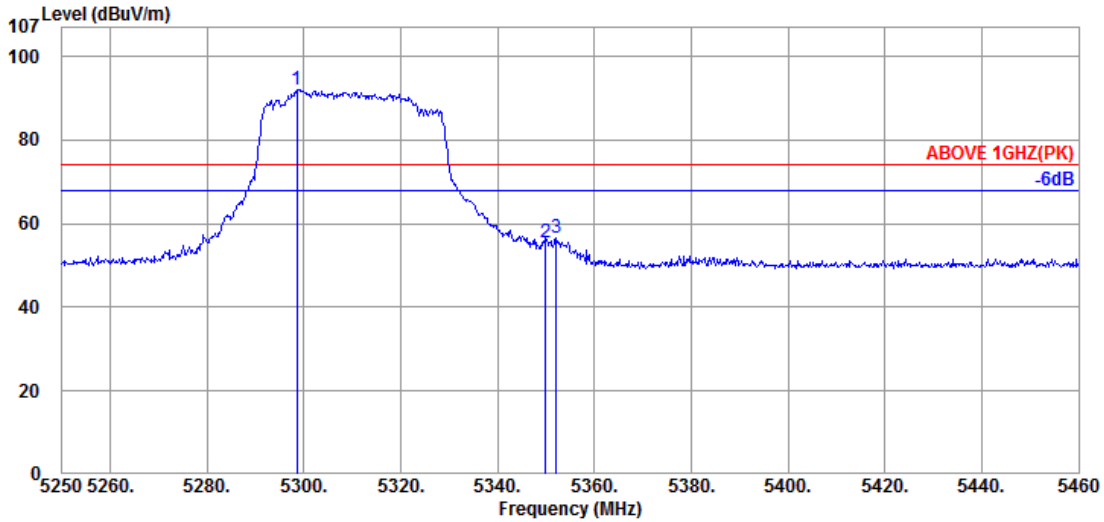

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.510	34.60	10.45	34.33	81.35	92.07	---	---	Peak
5349.960	34.60	10.48	34.31	44.69	55.46	74.00	18.54	Peak
5352.060	34.60	10.48	34.31	45.69	56.46	74.00	17.54	Peak

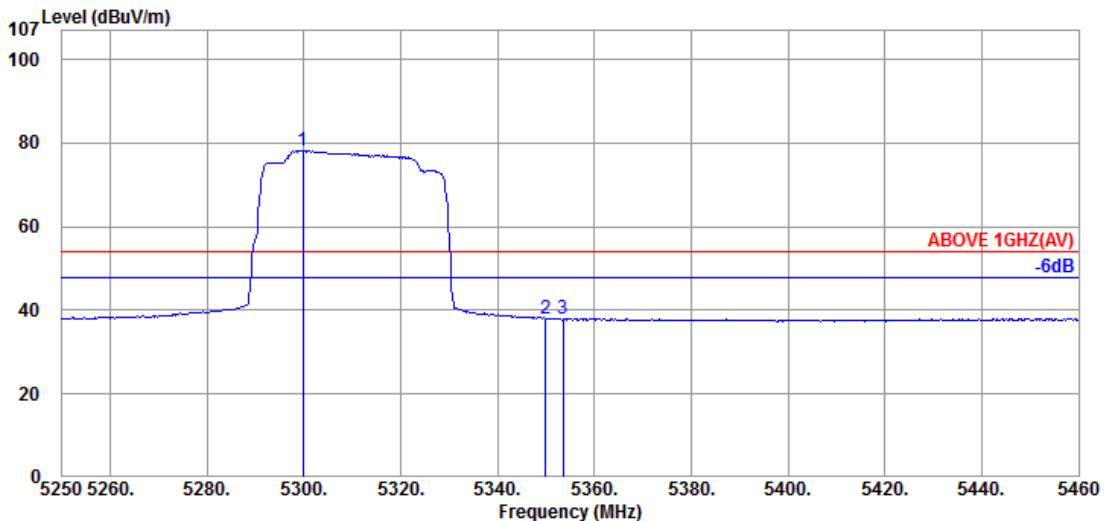


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.770	34.60	10.45	34.33	67.51	78.23	---	---	Average
5349.960	34.60	10.48	34.31	27.19	37.96	54.00	16.04	Average
5353.530	34.60	10.48	34.31	27.34	38.11	54.00	15.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

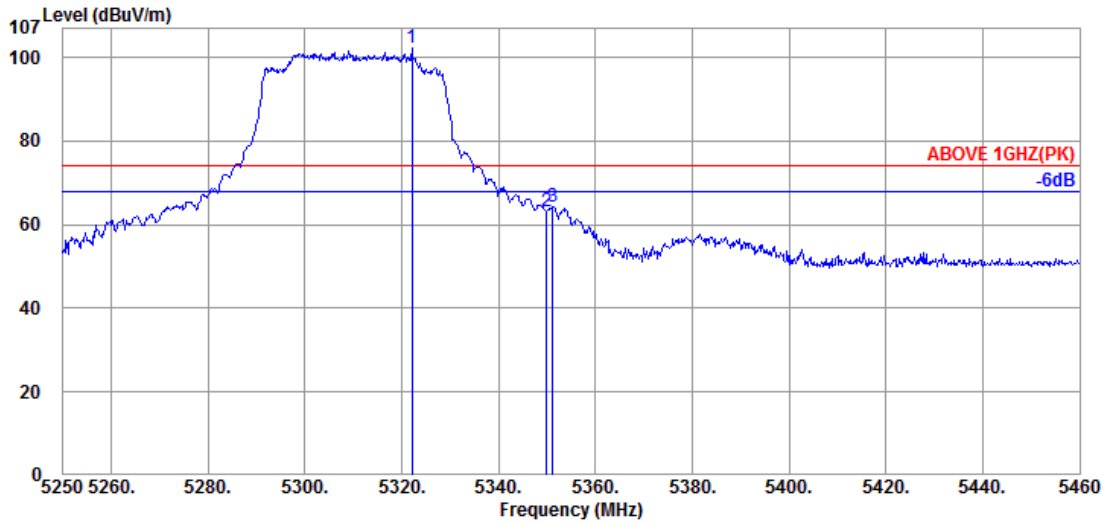

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.030	34.60	10.46	34.33	91.45	102.18	---	---	Peak
5349.960	34.60	10.48	34.31	52.43	63.20	74.00	10.80	Peak
5351.220	34.60	10.48	34.31	53.63	64.40	74.00	9.60	Peak

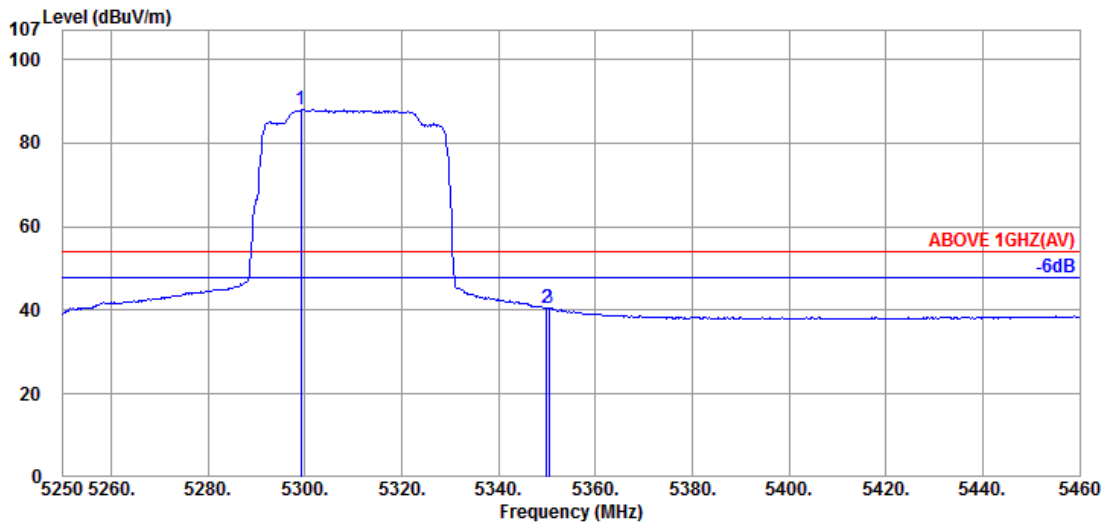


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.140	34.60	10.45	34.33	77.17	87.89	---	---	Average
5349.960	34.60	10.48	34.31	29.74	40.51	54.00	13.49	Average
5350.380	34.60	10.48	34.31	29.65	40.42	54.00	13.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

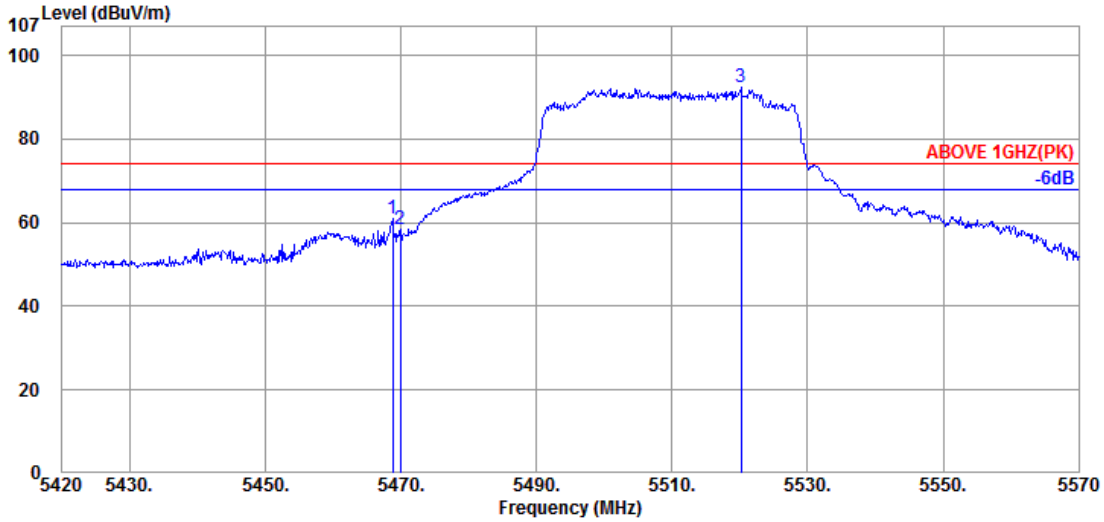

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.67	10.54	34.28	50.05	60.98	74.00	13.02	Peak
5469.950	34.67	10.54	34.28	47.37	58.30	74.00	15.70	Peak
@ 5520.200	34.60	10.58	34.28	81.66	92.56	---	---	Peak

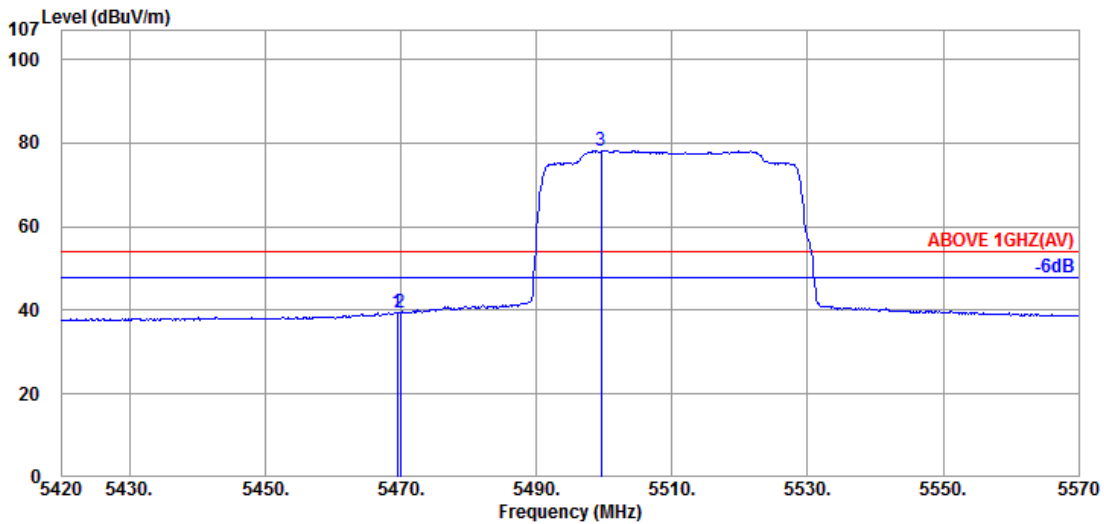


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.67	10.54	34.28	28.69	39.62	54.00	14.38	Average
5469.950	34.67	10.54	34.28	28.38	39.31	54.00	14.69	Average
@ 5499.500	34.60	10.56	34.27	67.24	78.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

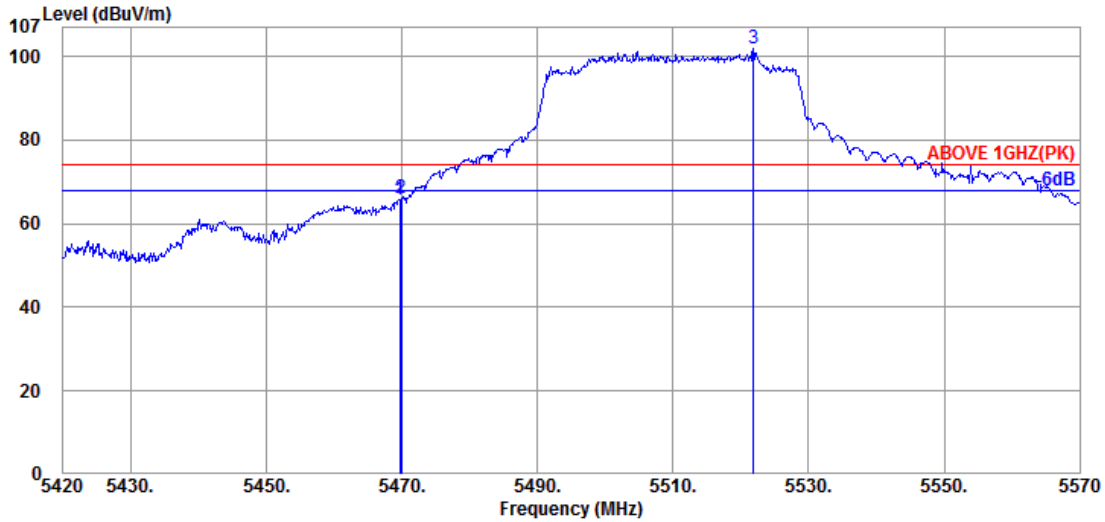

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.650	34.67	10.54	34.28	54.70	65.63	74.00	8.37	Peak
5469.950	34.67	10.54	34.28	55.14	66.07	74.00	7.93	Peak
@ 5521.850	34.60	10.58	34.28	91.03	101.93	---	---	Peak

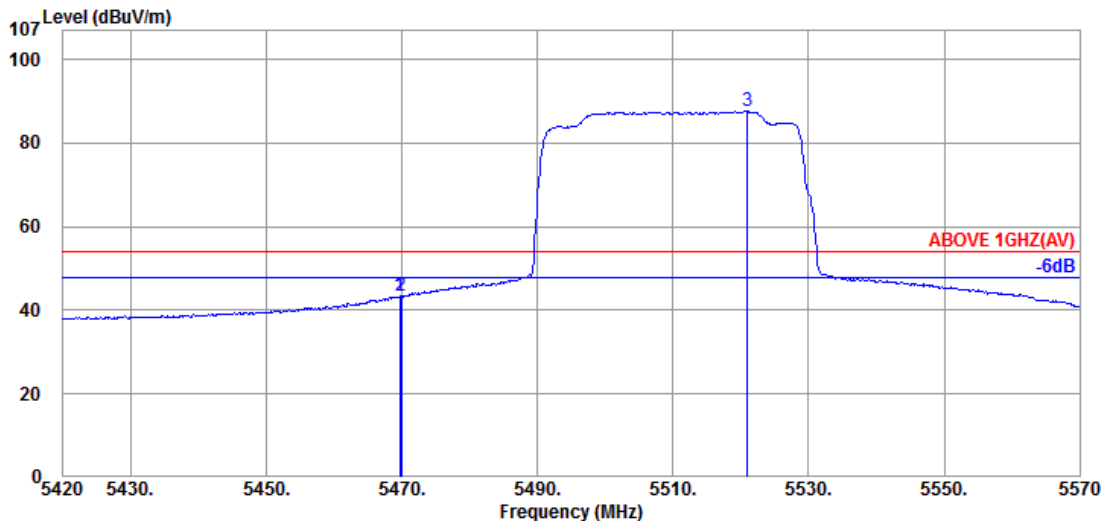


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.650	34.67	10.54	34.28	32.45	43.38	54.00	10.62	Average
5469.950	34.67	10.54	34.28	32.57	43.50	54.00	10.50	Average
@ 5520.950	34.60	10.58	34.28	76.77	87.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

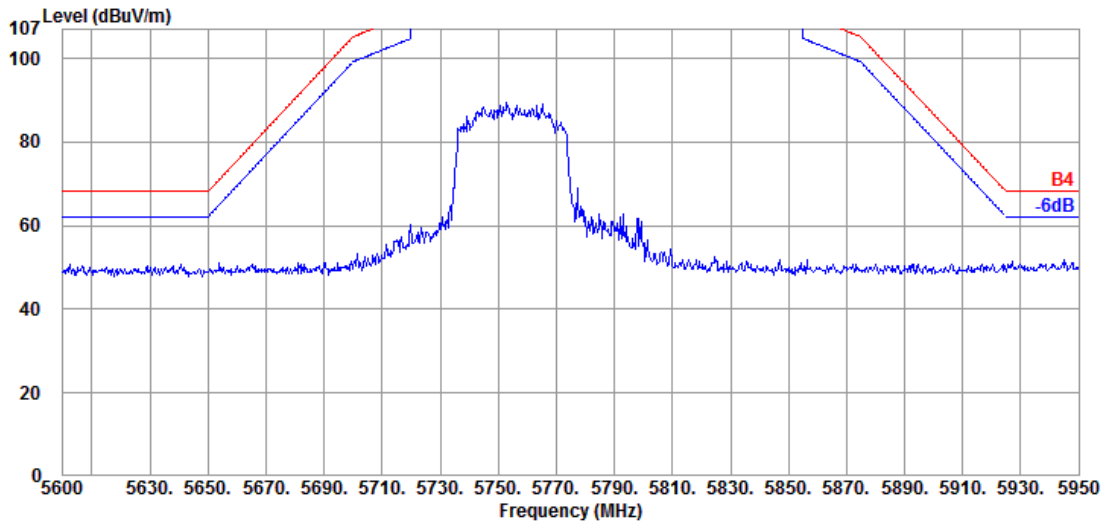


Antenna at Vertical Polarization

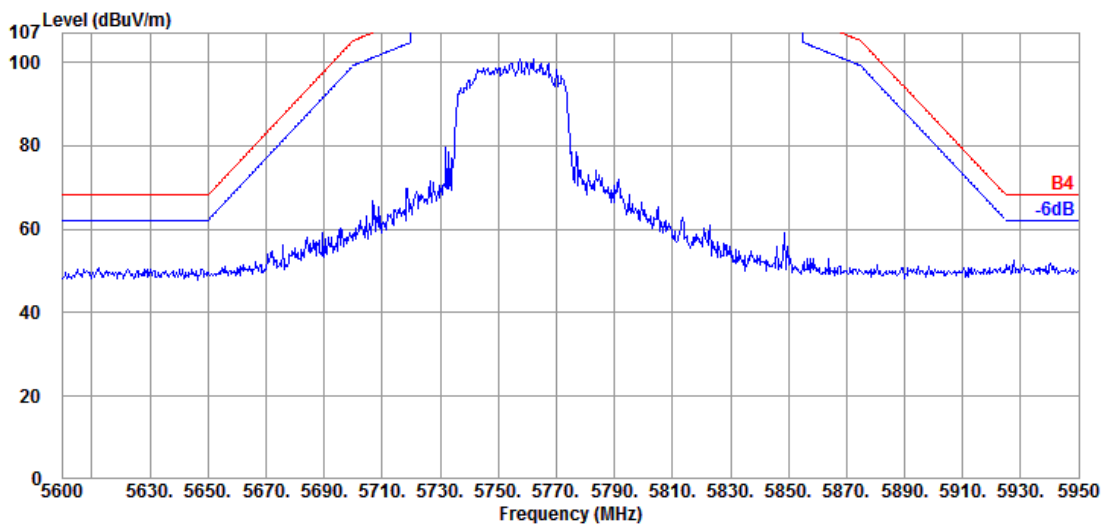


Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

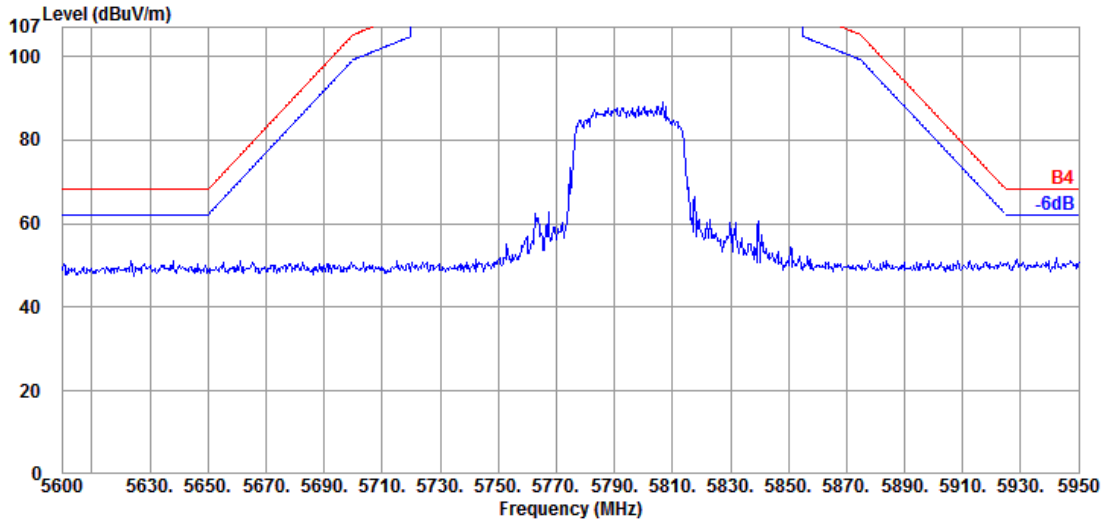

Antenna at Vertical Polarization

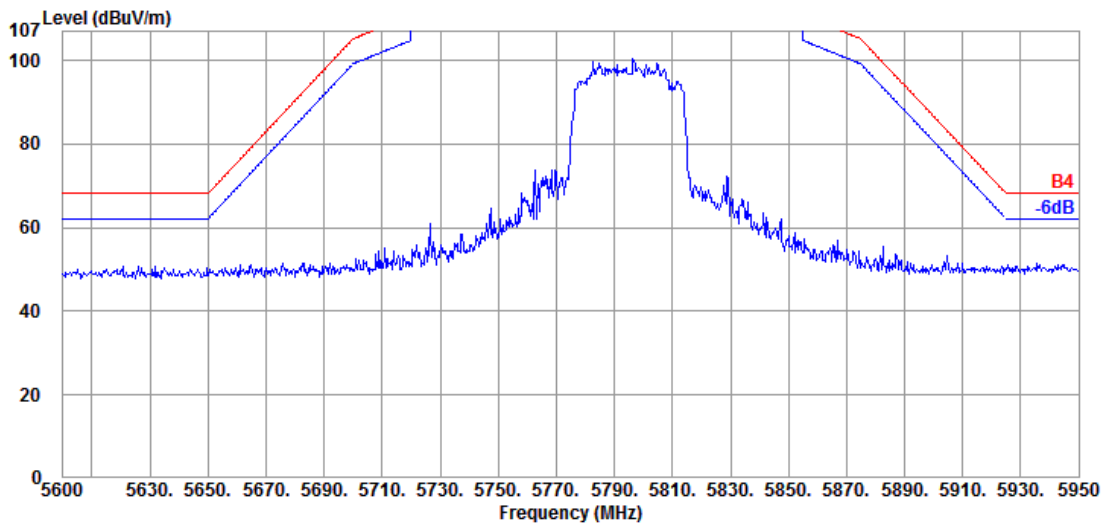


Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

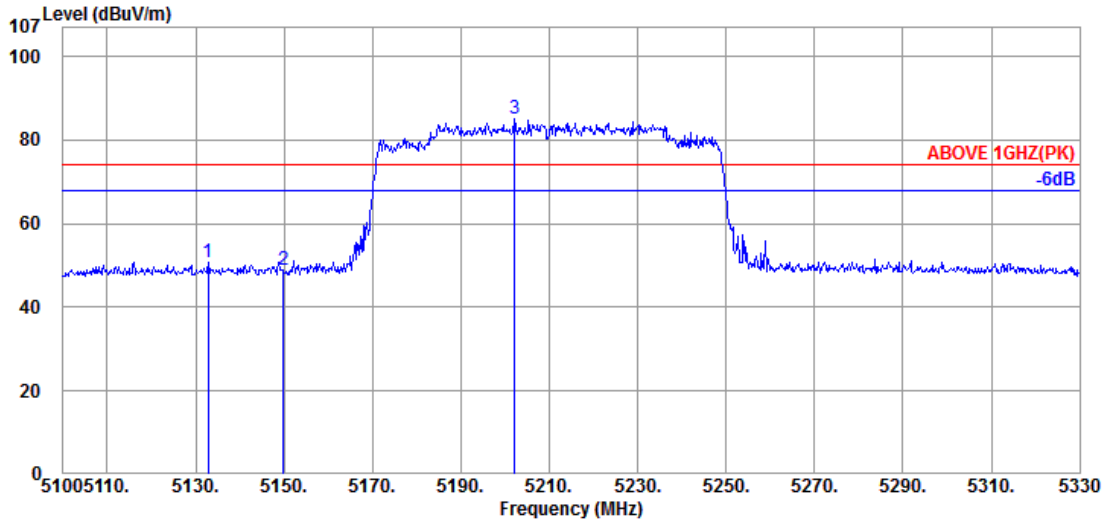

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.890	34.37	10.35	34.39	40.58	50.91	74.00	23.09	Peak
5149.910	34.40	10.36	34.38	38.63	49.01	74.00	24.99	Peak
@ 5202.120	34.50	10.39	34.36	74.43	84.96	---	---	Peak

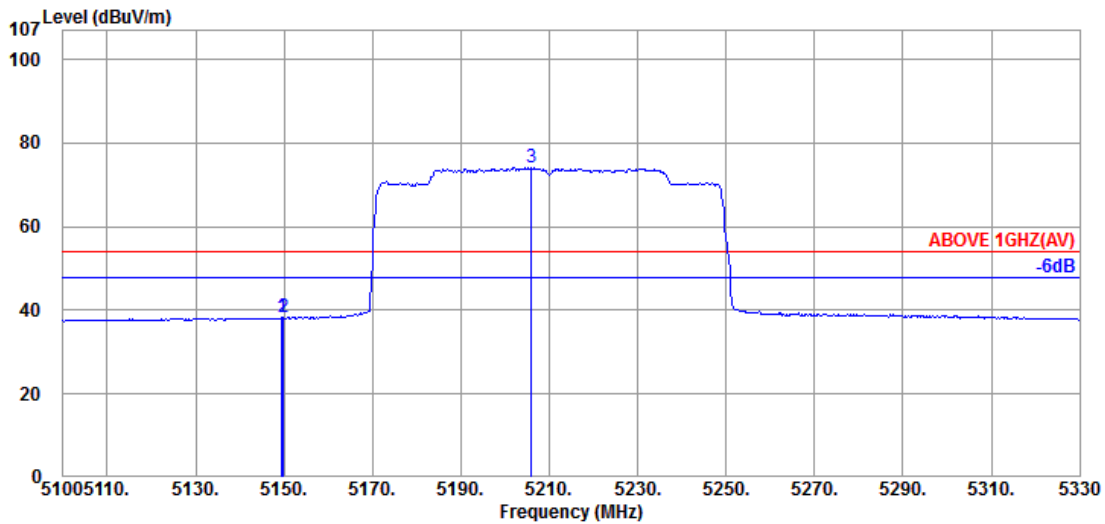


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.40	10.36	34.38	27.87	38.25	54.00	15.75	Average
5149.910	34.40	10.36	34.38	27.81	38.19	54.00	15.81	Average
@ 5206.030	34.50	10.39	34.36	63.63	74.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

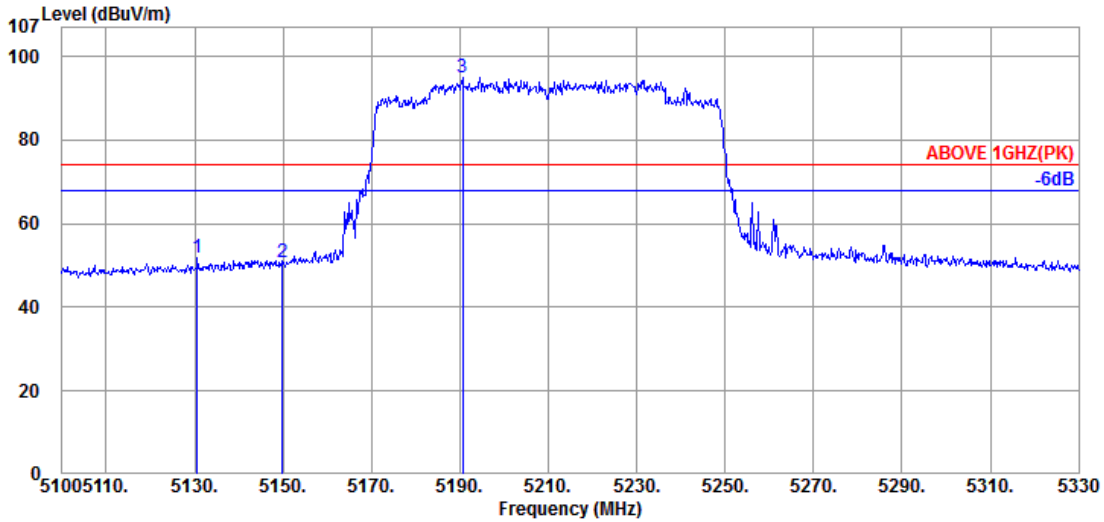

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.590	34.37	10.35	34.39	41.66	51.99	74.00	22.01	Peak
5149.910	34.40	10.36	34.38	40.31	50.69	74.00	23.31	Peak
@ 5190.620	34.50	10.39	34.36	84.53	95.06	---	---	Peak

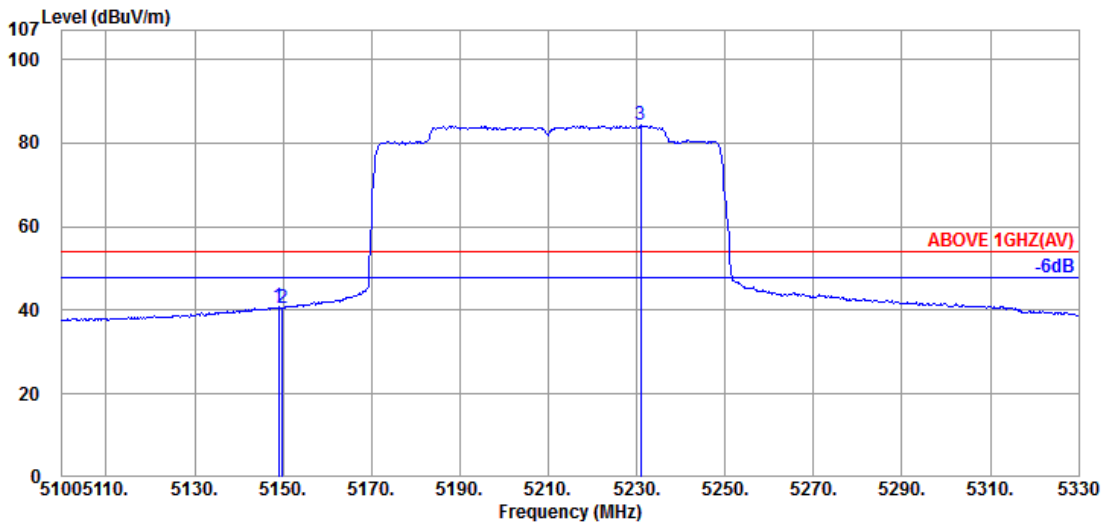


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.40	10.36	34.38	30.53	40.91	54.00	13.09	Average
5149.910	34.40	10.36	34.38	30.13	40.51	54.00	13.49	Average
@ 5230.870	34.50	10.41	34.35	73.64	84.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

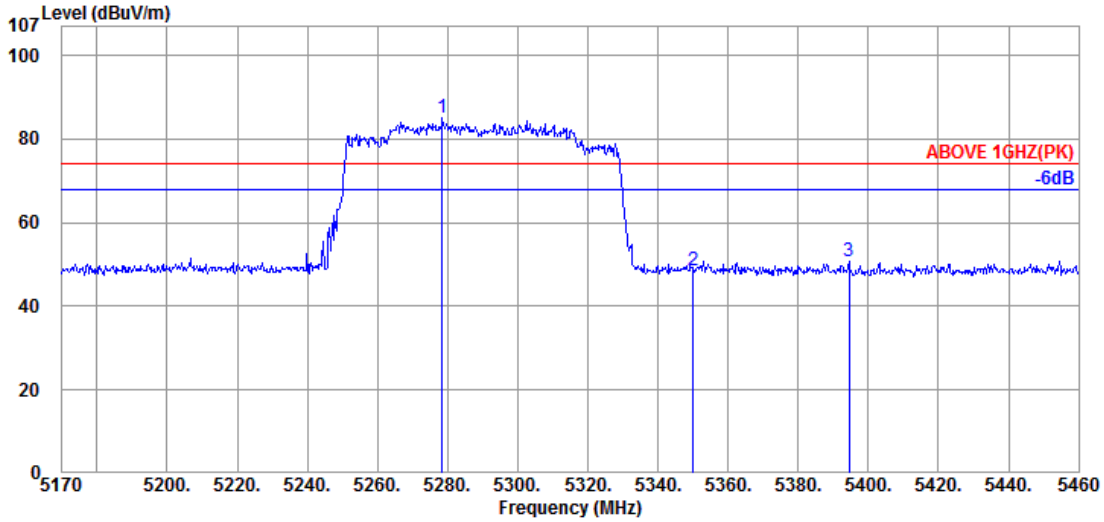

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.460	34.57	10.44	34.34	74.50	85.17	---	---	Peak
5350.090	34.60	10.48	34.31	37.64	48.41	74.00	25.59	Peak
5394.460	34.60	10.49	34.30	40.05	50.84	74.00	23.16	Peak

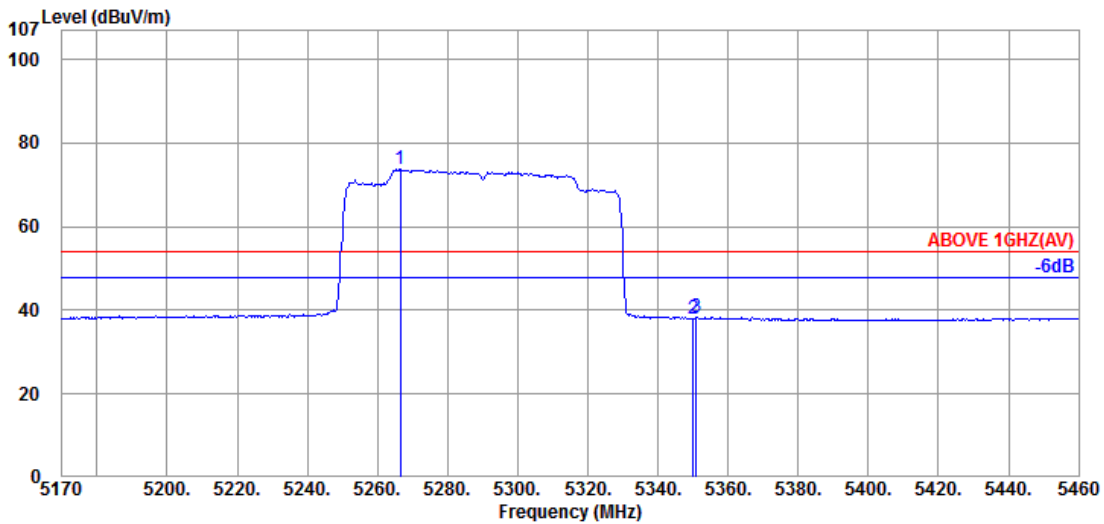


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.570	34.53	10.43	34.34	63.05	73.67	---	---	Average
5350.090	34.60	10.48	34.31	27.30	38.07	54.00	15.93	Average
5350.960	34.60	10.48	34.31	27.68	38.45	54.00	15.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

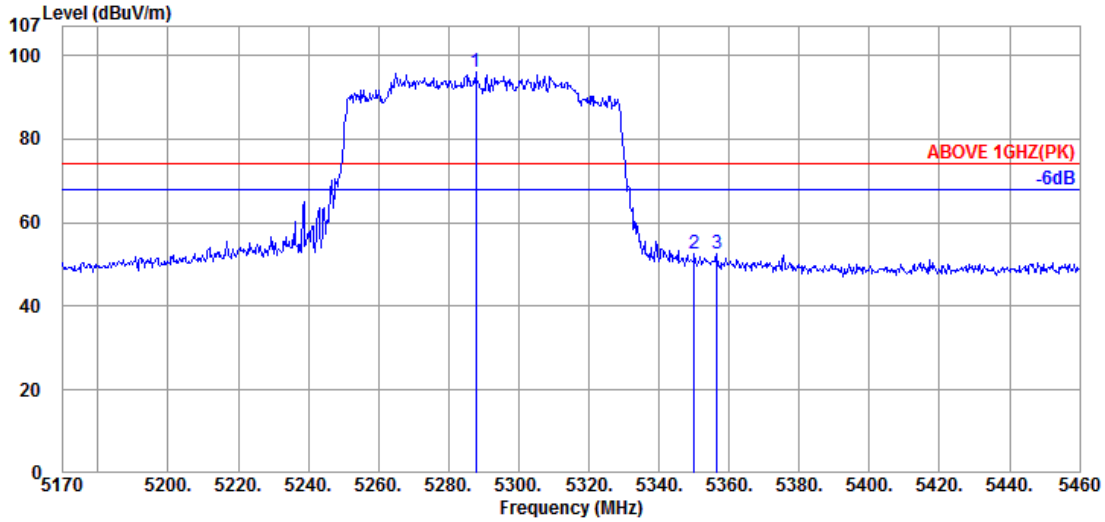

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.740	34.57	10.44	34.34	85.39	96.06	---	---	Peak
5350.090	34.60	10.48	34.31	41.77	52.54	74.00	21.46	Peak
5356.470	34.60	10.48	34.31	41.92	52.69	74.00	21.31	Peak

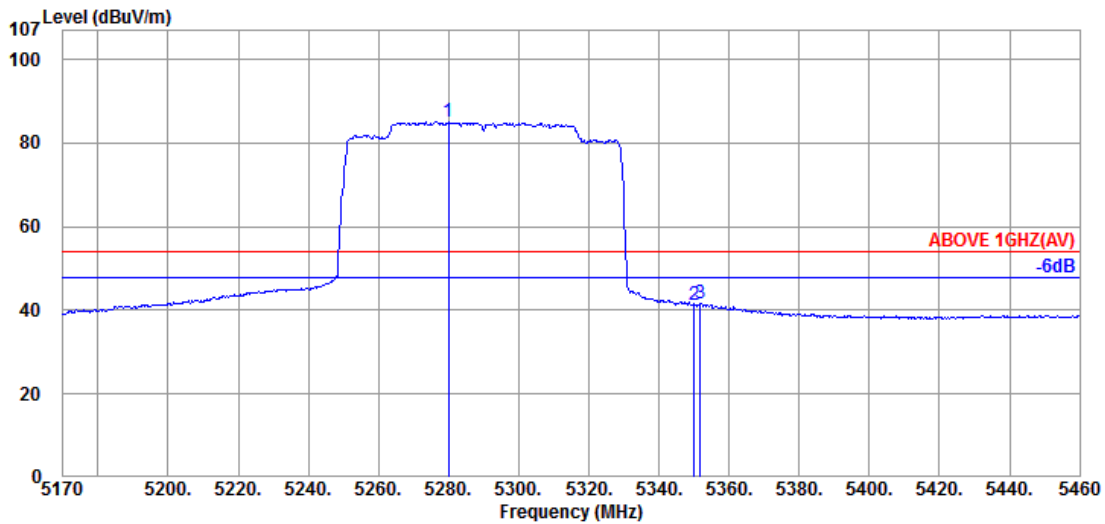


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.910	34.57	10.44	34.34	74.49	85.16	---	---	Average
5350.090	34.60	10.48	34.31	30.52	41.29	54.00	12.71	Average
5351.830	34.60	10.48	34.31	30.70	41.47	54.00	12.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

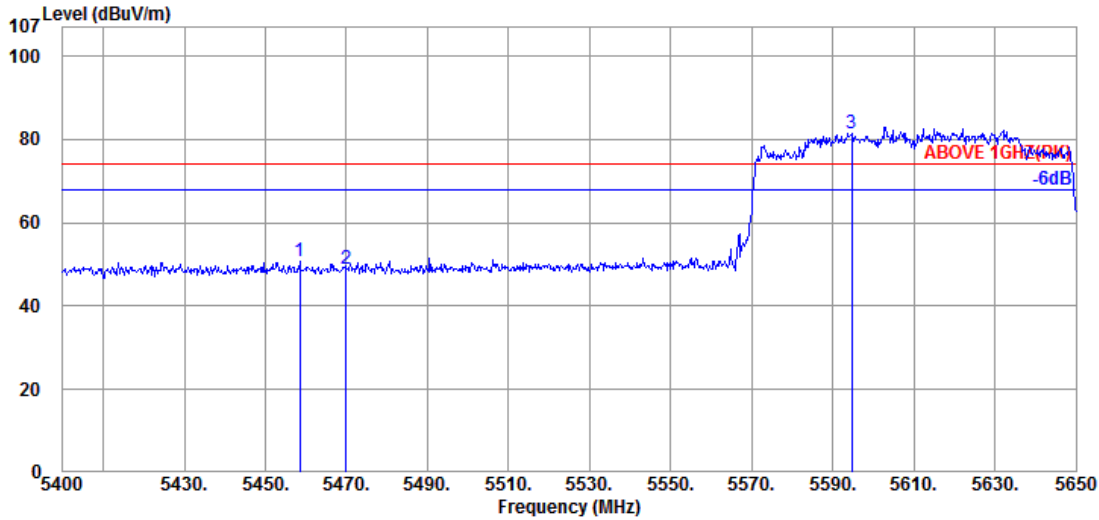

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.70	10.53	34.28	39.65	50.60	74.00	23.40	Peak
5470.000	34.67	10.54	34.28	37.98	48.91	74.00	25.09	Peak
@ 5594.750	34.60	10.67	34.31	70.54	81.50	---	---	Peak

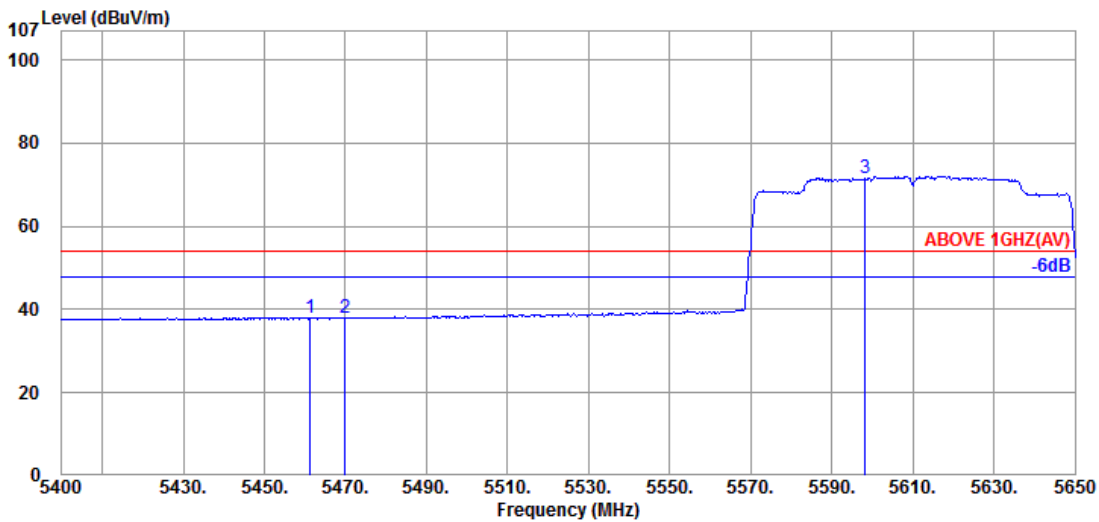


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.250	34.70	10.53	34.28	27.18	38.13	54.00	15.87	Average
5470.000	34.67	10.54	34.28	27.15	38.08	54.00	15.92	Average
@ 5598.250	34.60	10.67	34.32	60.64	71.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

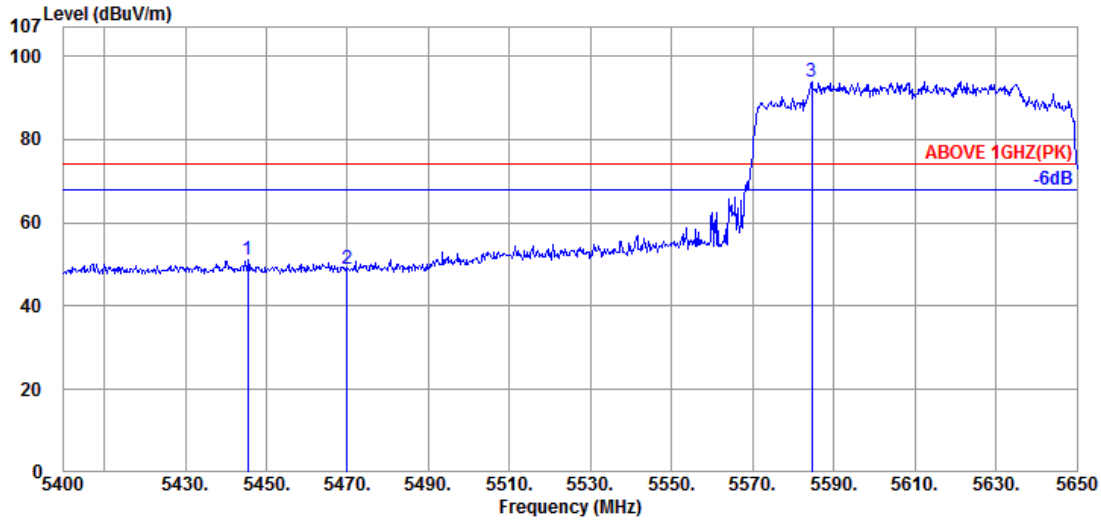

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	34.67	10.53	34.29	40.08	50.99	74.00	23.01	Peak
5470.000	34.67	10.54	34.28	38.18	49.11	74.00	24.89	Peak
@ 5584.500	34.60	10.67	34.31	82.84	93.80	---	---	Peak

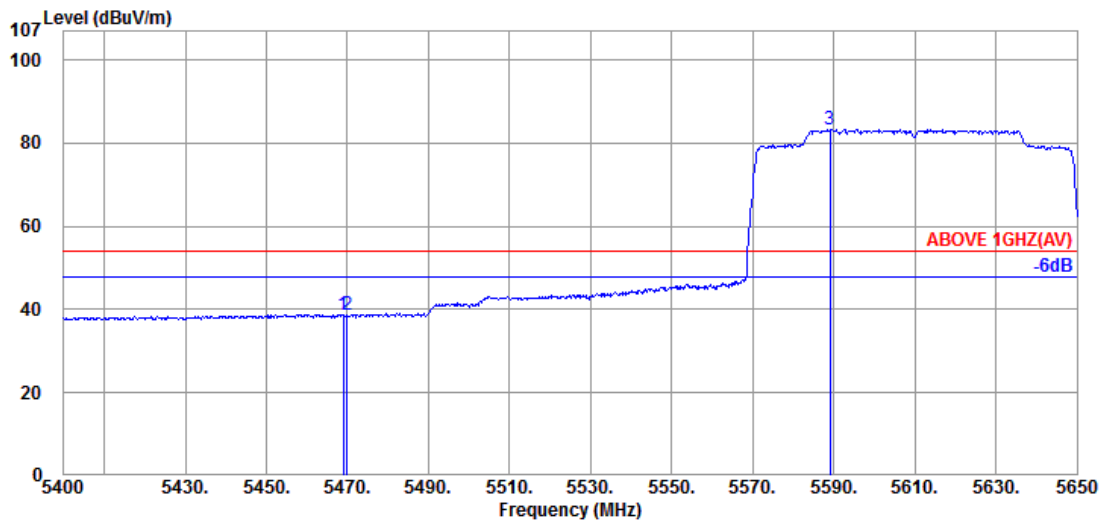


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.67	10.54	34.28	27.93	38.86	54.00	15.14	Average
5470.000	34.67	10.54	34.28	27.77	38.70	54.00	15.30	Average
@ 5589.000	34.60	10.67	34.31	72.39	83.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/S67	Frequency	TX 5570MHz

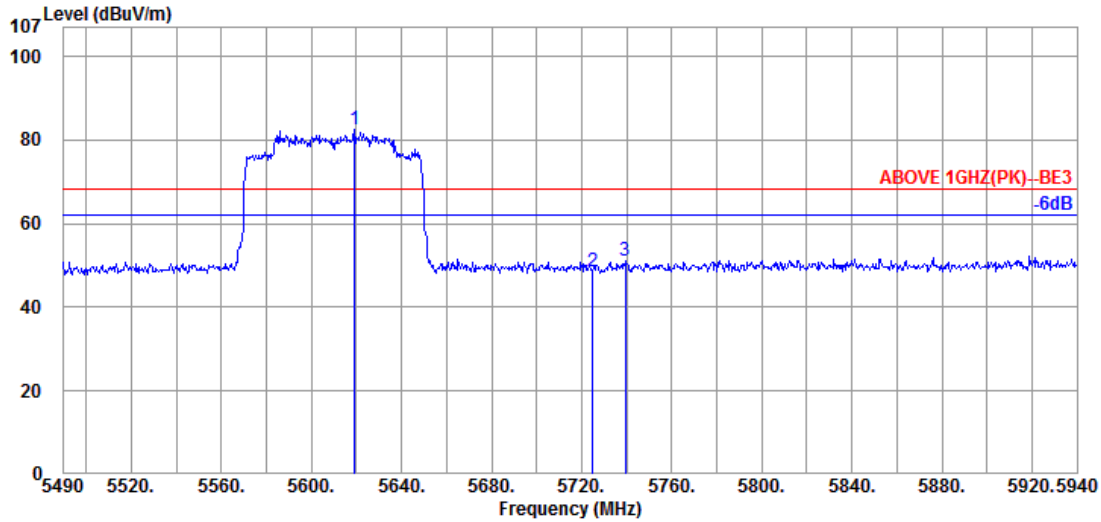

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.150	34.60	10.71	34.33	71.51	82.49	---	---	Peak
5724.900	34.80	10.84	34.37	37.20	48.47	68.20	19.73	Peak
5739.300	34.80	10.86	34.38	39.82	51.10	68.20	17.10	Peak

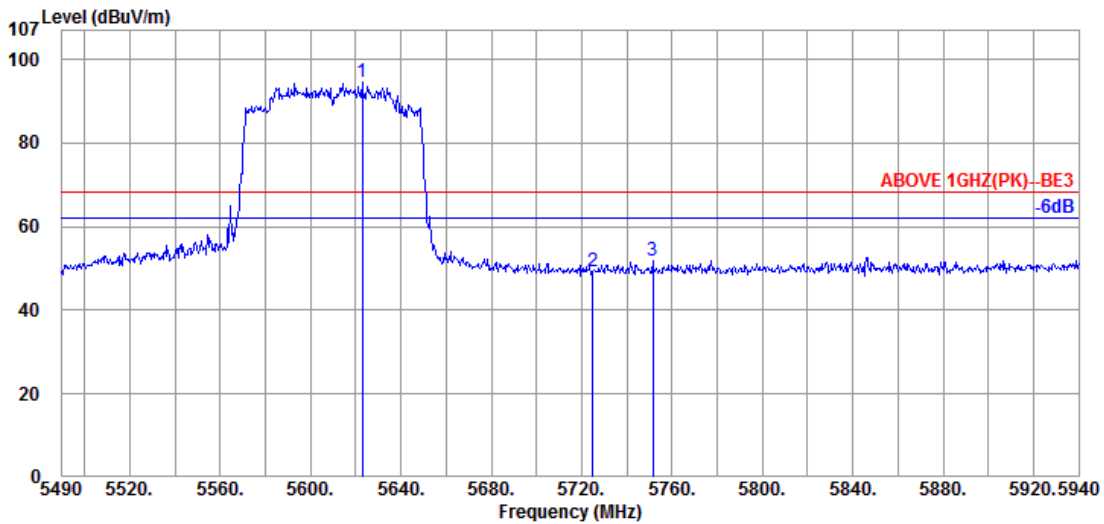


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.750	34.60	10.71	34.33	83.67	94.65	---	---	Peak
5724.900	34.80	10.84	34.37	38.16	49.43	68.20	18.77	Peak
5751.450	34.80	10.86	34.39	40.48	51.75	68.20	16.45	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.


Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

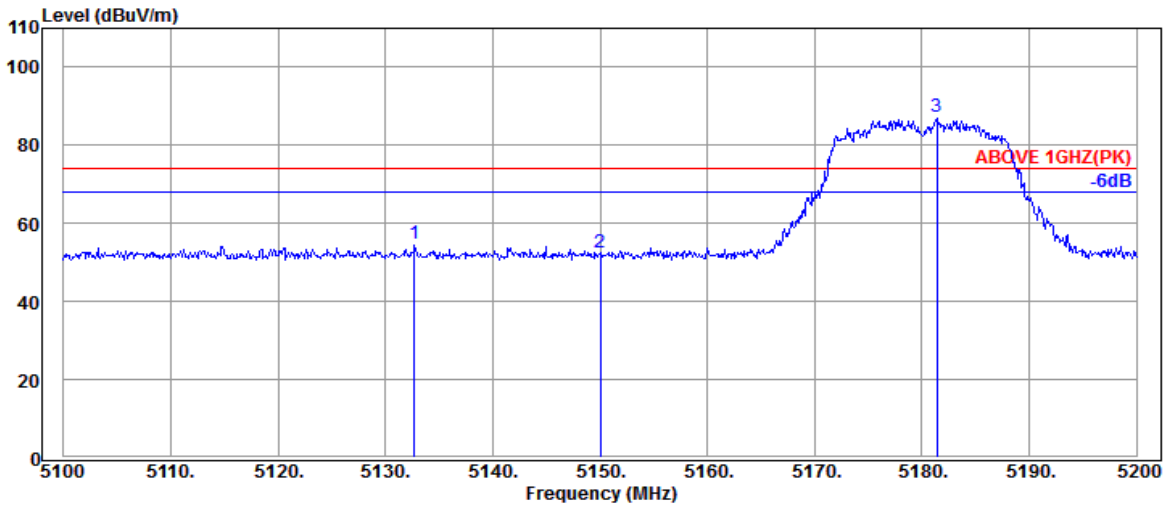

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.700	34.03	8.37	39.21	51.53	54.72	74.00	19.28	Peak
5150.000	34.10	8.39	39.21	49.31	52.59	74.00	21.41	Peak
@ 5181.400	34.23	8.41	39.21	84.07	87.50	---	---	Peak

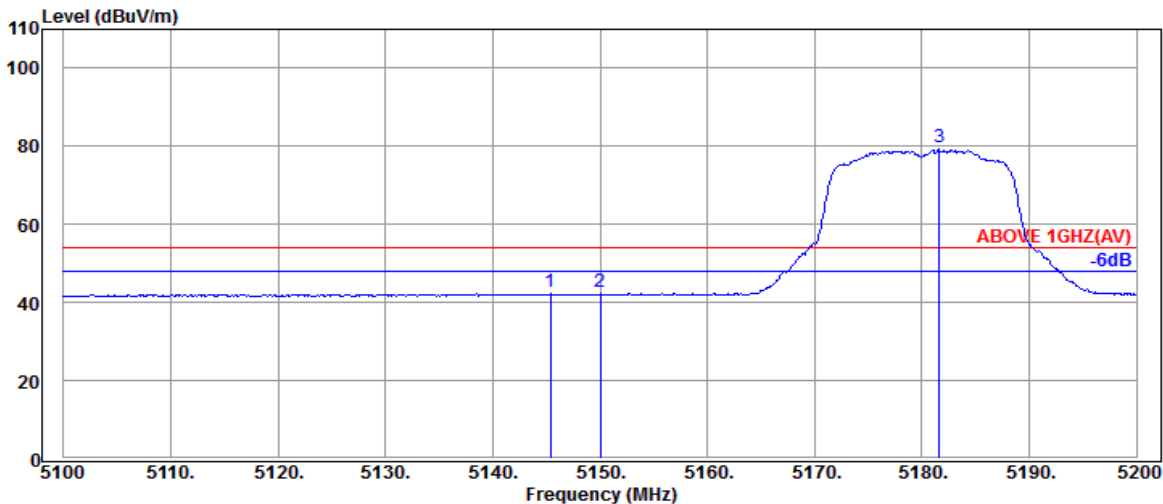


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	34.10	8.39	39.21	39.47	42.75	54.00	11.25	Average
5150.000	34.10	8.39	39.21	39.36	42.64	54.00	11.36	Average
@ 5181.600	34.23	8.41	39.21	76.15	79.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

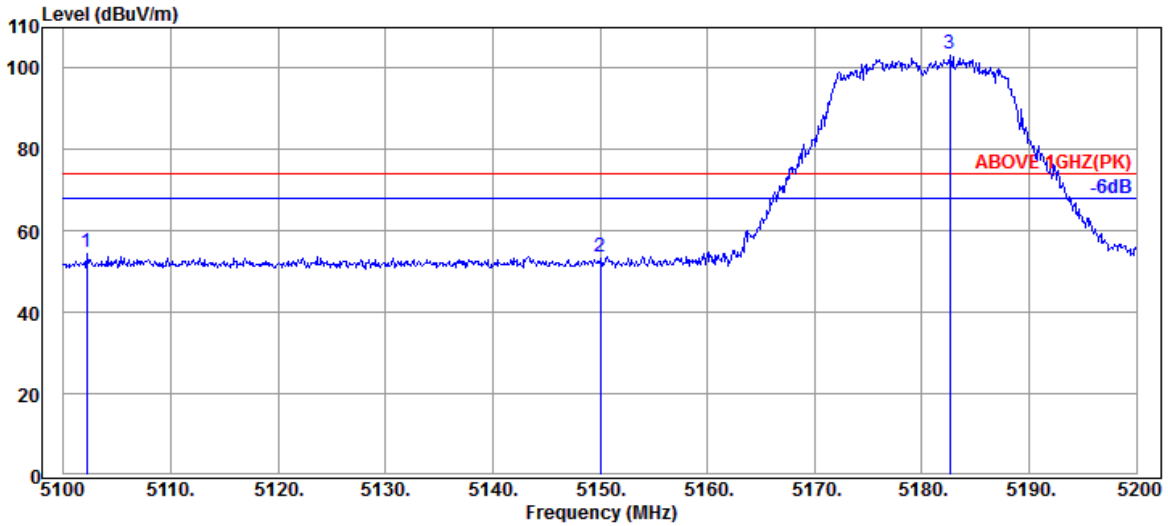

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.200	33.90	8.34	39.22	51.72	54.74	74.00	19.26	Peak
5150.000	34.10	8.39	39.21	50.45	53.73	74.00	20.27	Peak
@ 5182.600	34.23	8.41	39.21	100.03	103.46	---	---	Peak

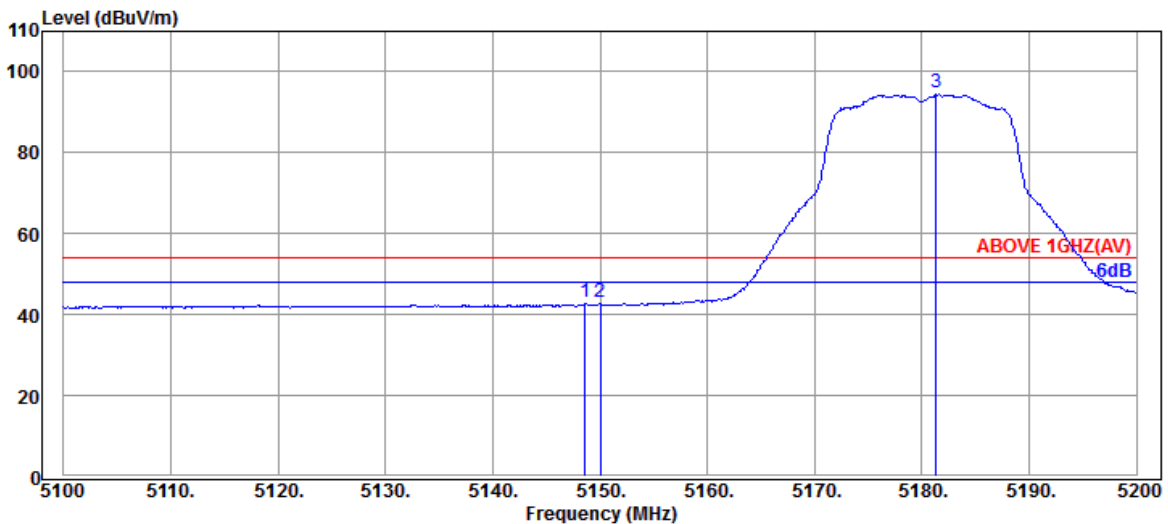


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.10	8.39	39.21	39.78	43.06	54.00	10.94	Average
5150.000	34.10	8.39	39.21	39.75	43.03	54.00	10.97	Average
@ 5181.300	34.23	8.41	39.21	91.48	94.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

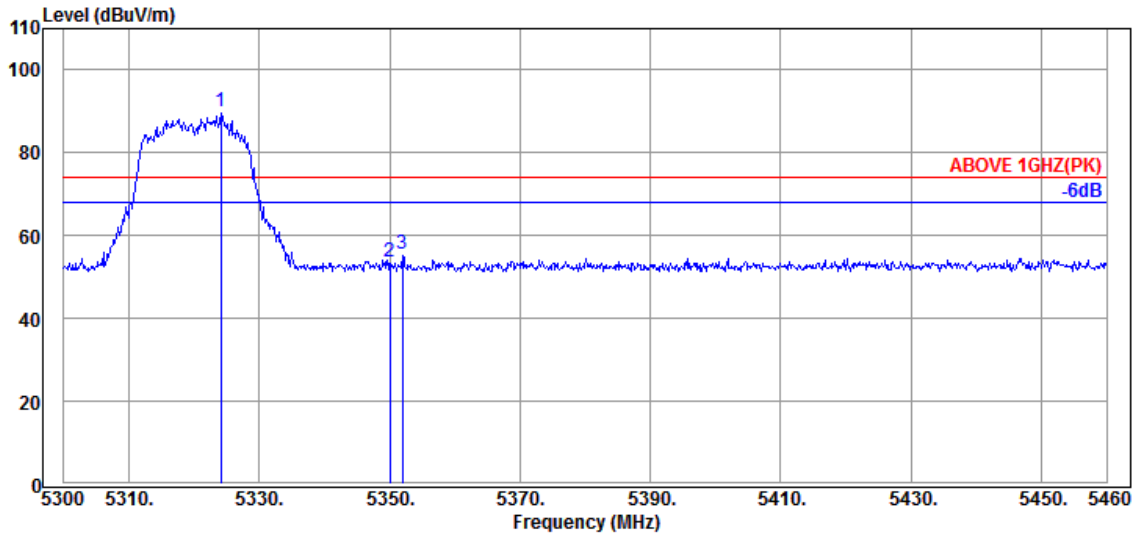

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.160	34.57	8.53	39.19	85.94	89.85	---	---	Peak
5350.080	34.60	8.56	39.19	49.79	53.76	74.00	20.24	Peak
5352.000	34.60	8.56	39.19	51.44	55.41	74.00	18.59	Peak

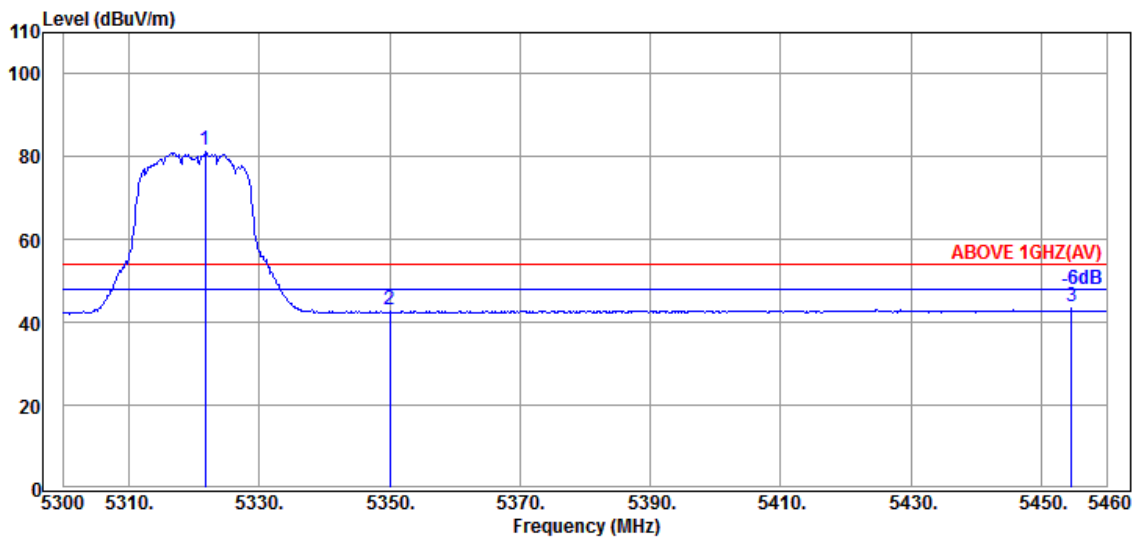


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.760	34.53	8.53	39.19	77.62	81.49	---	---	Average
5350.080	34.60	8.56	39.19	39.09	43.06	54.00	10.94	Average
5454.560	34.60	8.64	39.17	39.60	43.67	54.00	10.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

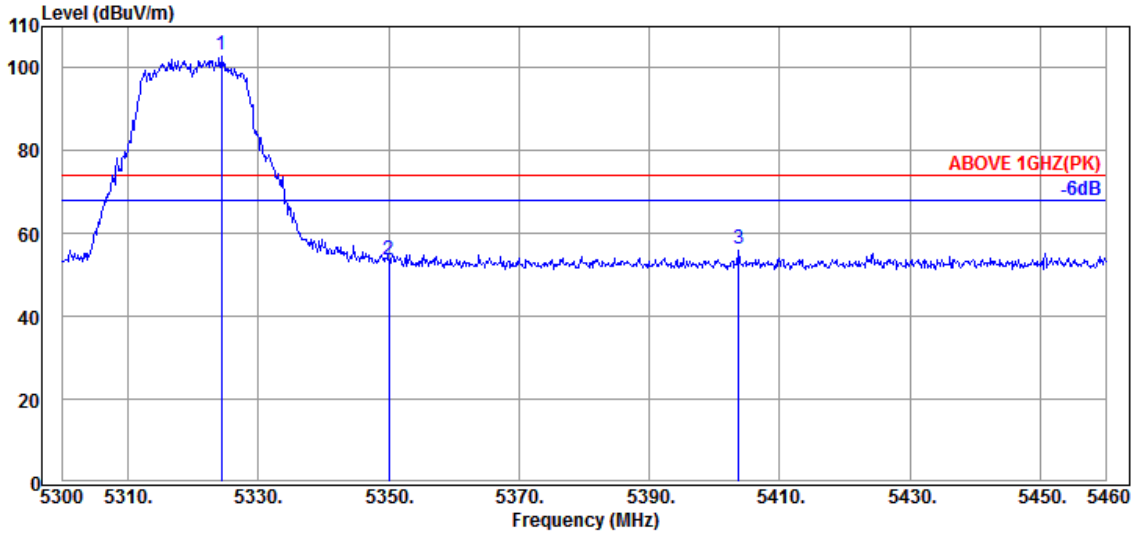

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.320	34.57	8.53	39.19	99.20	103.11	---	---	Peak
5350.080	34.60	8.56	39.19	49.53	53.50	74.00	20.50	Peak
5403.680	34.67	8.60	39.18	52.40	56.49	74.00	17.51	Peak

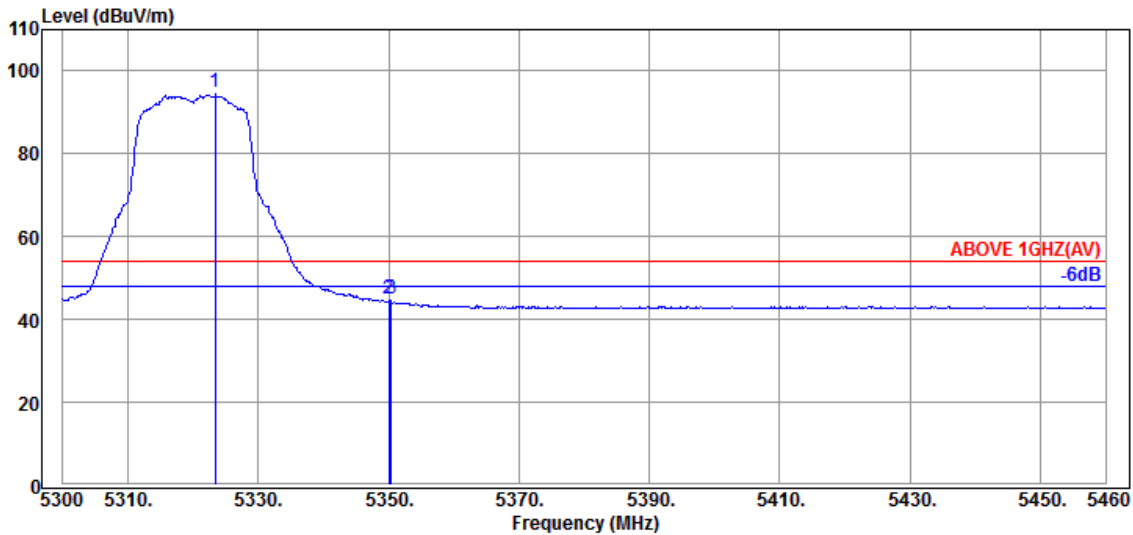


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	34.57	8.53	39.19	90.80	94.71	---	---	Average
5350.080	34.60	8.56	39.19	40.84	44.81	54.00	9.19	Average
5350.400	34.60	8.56	39.19	40.97	44.94	54.00	9.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

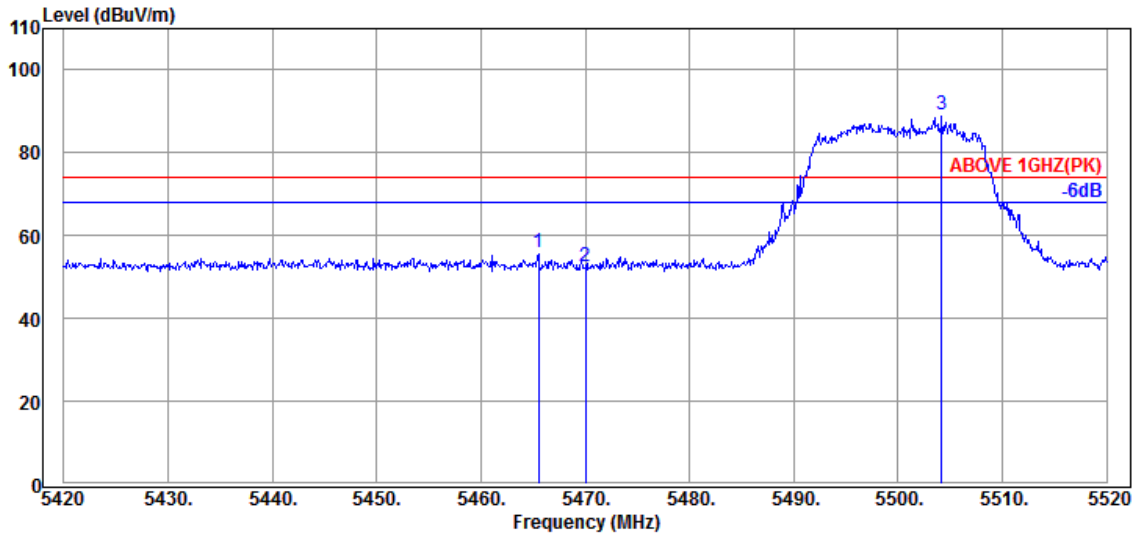

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.57	8.65	39.17	51.92	55.97	74.00	18.03	Peak
5470.000	34.57	8.65	39.17	48.39	52.44	74.00	21.56	Peak
@ 5504.200	34.50	8.68	39.17	85.23	89.24	---	---	Peak

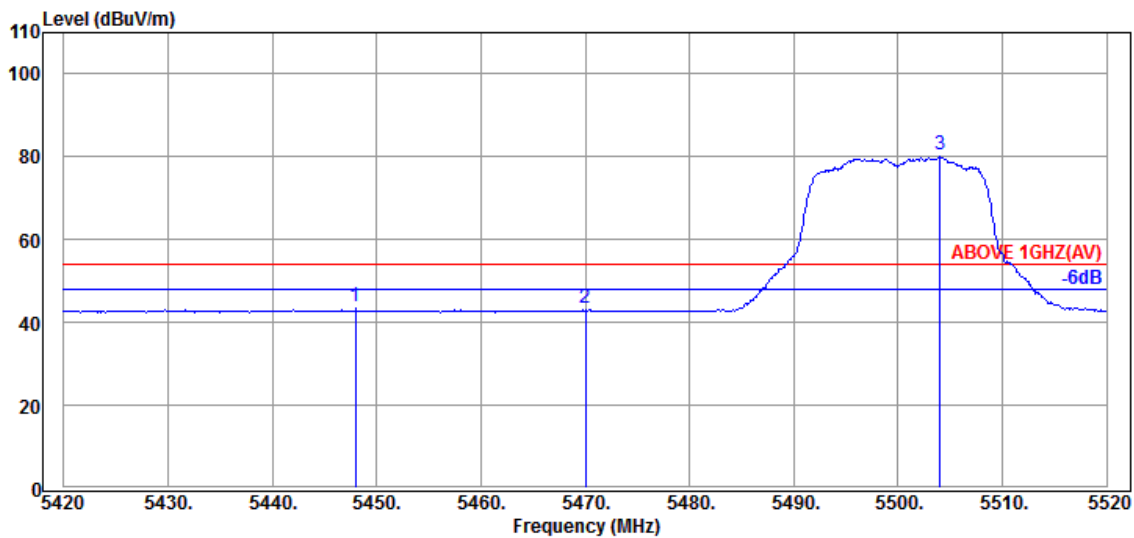


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.60	8.64	39.18	39.61	43.67	54.00	10.33	Average
5470.000	34.57	8.65	39.17	39.33	43.38	54.00	10.62	Average
@ 5504.000	34.50	8.68	39.17	76.49	80.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

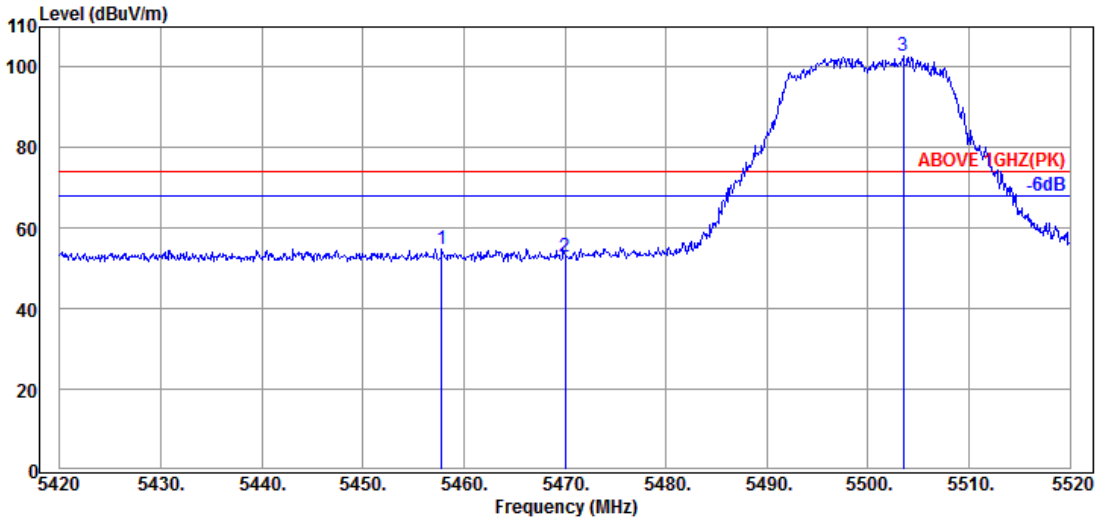

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.60	8.64	39.17	50.88	54.95	74.00	19.05	Peak
5470.000	34.57	8.65	39.17	48.79	52.84	74.00	21.16	Peak
@ 5503.500	34.50	8.68	39.17	98.80	102.81	---	---	Peak

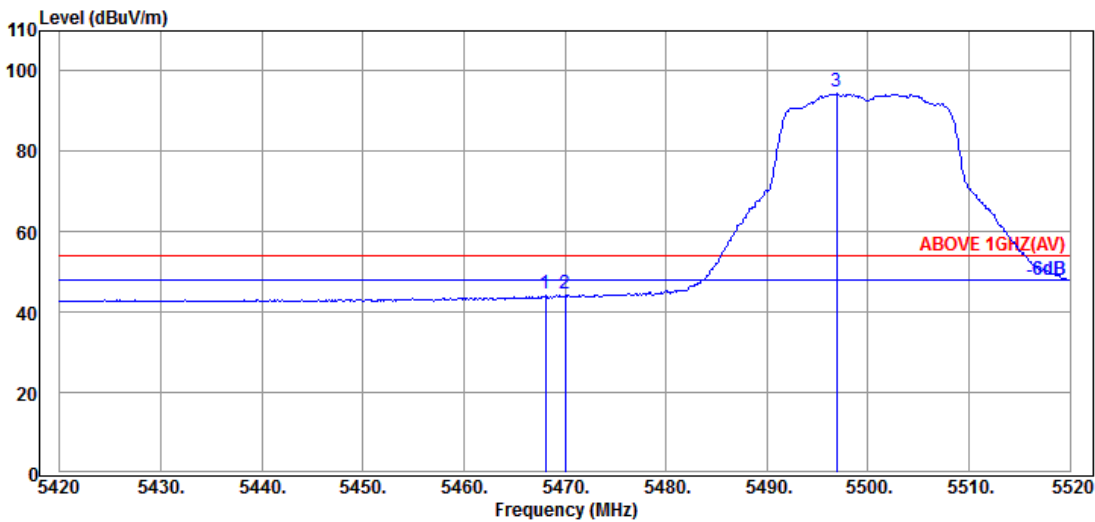


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.57	8.65	39.17	40.57	44.62	54.00	9.38	Average
5470.000	34.57	8.65	39.17	40.73	44.78	54.00	9.22	Average
@ 5496.900	34.50	8.68	39.17	91.03	95.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5700MHz

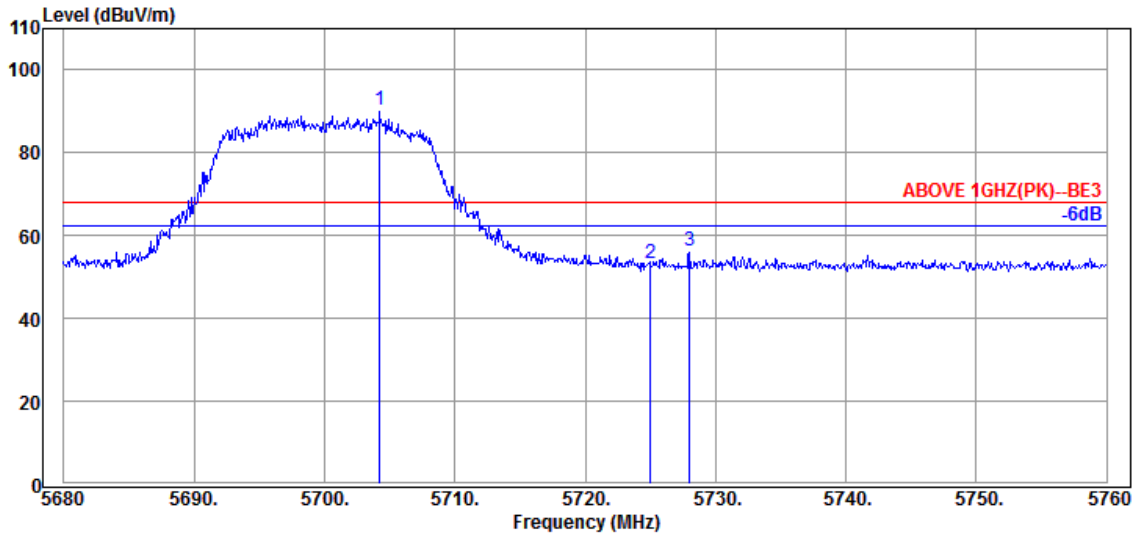

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.240	34.50	8.85	39.22	86.28	90.41	---	---	Peak
5725.040	34.50	8.86	39.23	49.14	53.27	68.20	14.93	Peak
5728.000	34.50	8.86	39.23	52.09	56.22	68.20	11.98	Peak

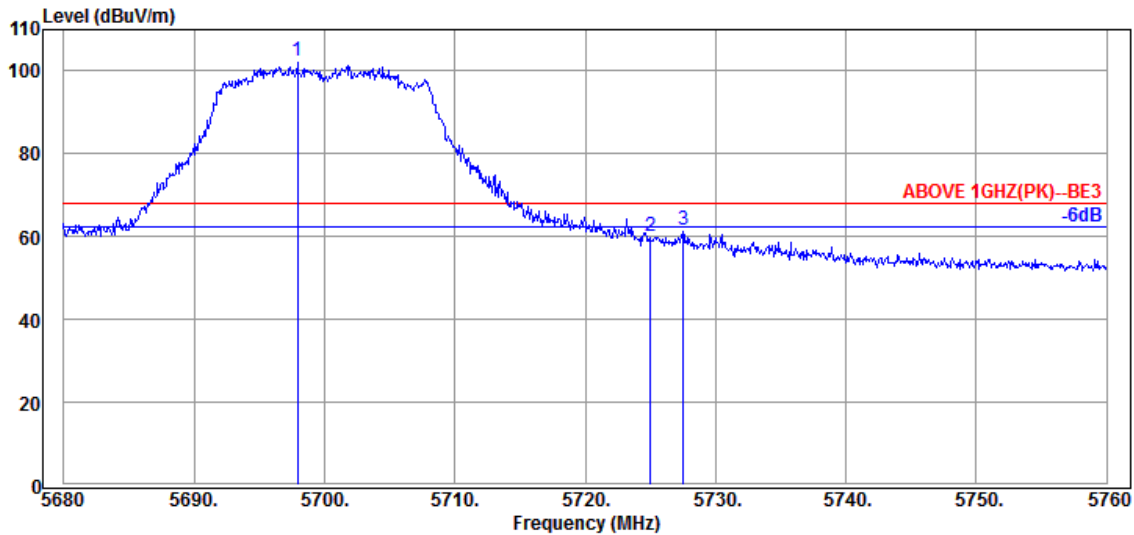


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.920	34.50	8.84	39.22	98.25	102.37	---	---	Peak
5725.040	34.50	8.86	39.23	55.99	60.12	68.20	8.08	Peak
5727.520	34.50	8.86	39.23	57.34	61.47	68.20	6.73	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

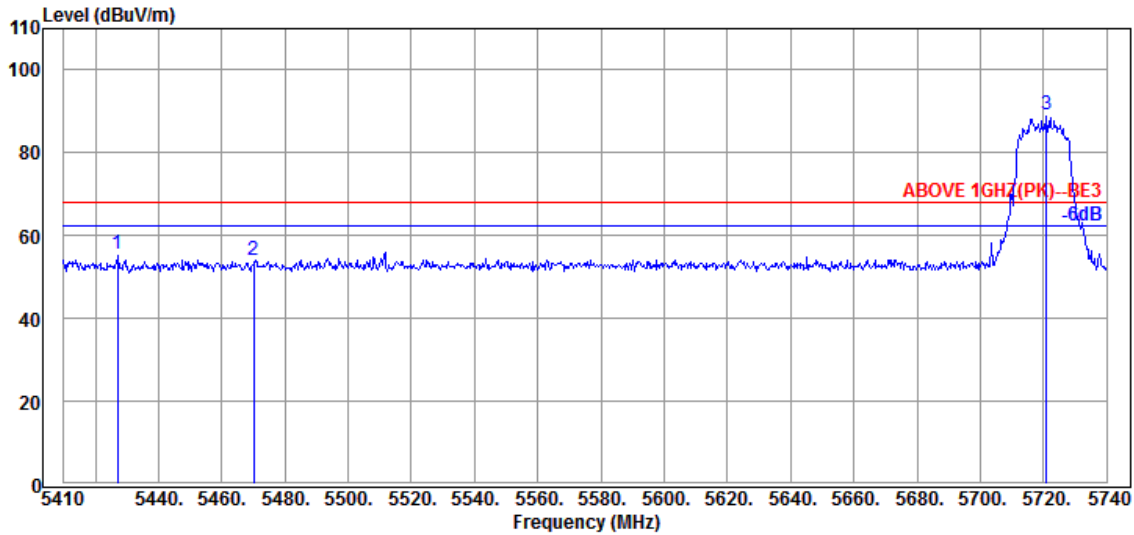

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.160	34.65	8.61	39.18	51.63	55.71	68.20	12.49	Peak
5470.060	34.57	8.65	39.17	49.97	54.02	68.20	14.18	Peak
@ 5720.860	34.50	8.86	39.23	85.15	89.28	---	---	Peak

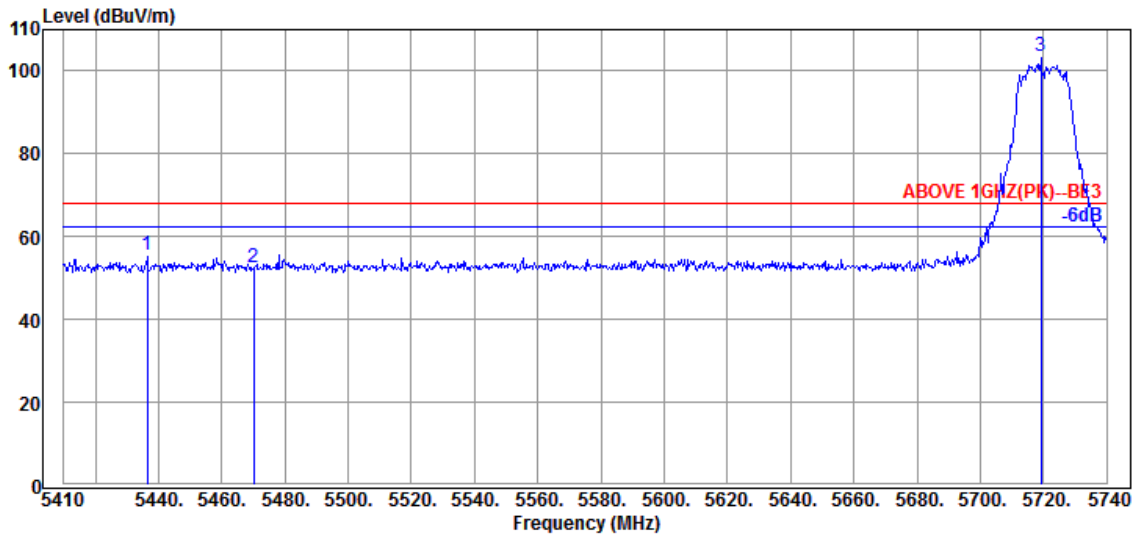


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.400	34.62	8.63	39.18	51.49	55.56	68.20	12.64	Peak
5470.060	34.57	8.65	39.17	48.55	52.60	68.20	15.60	Peak
@ 5719.210	34.50	8.86	39.23	99.46	103.59	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

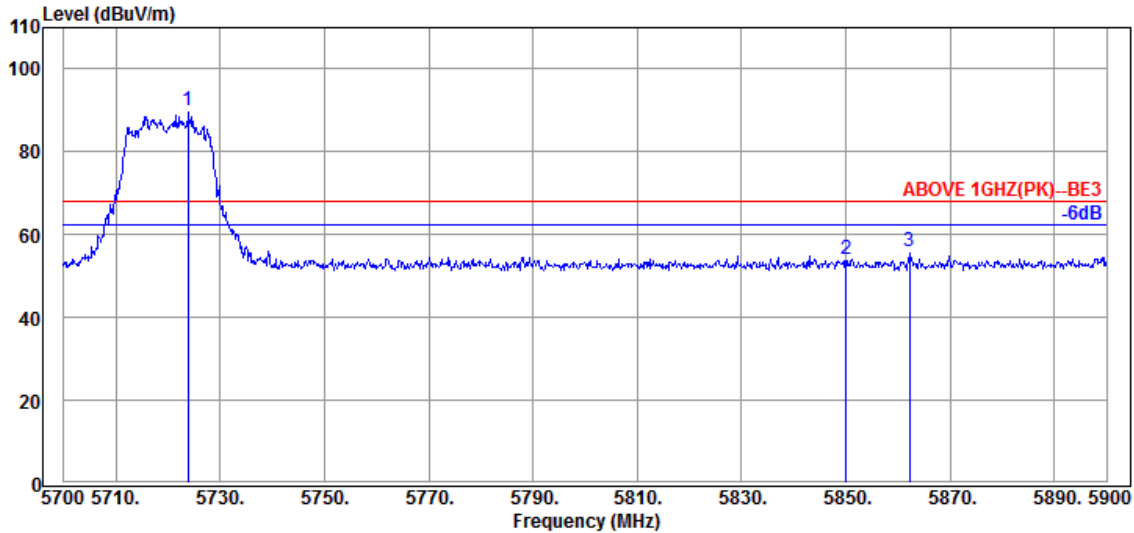

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.800	34.50	8.86	39.23	85.66	89.79	---	---	Peak
5850.000	34.40	8.96	39.26	50.04	54.14	68.20	14.06	Peak
5862.200	34.43	8.98	39.27	51.72	55.86	68.20	12.34	Peak

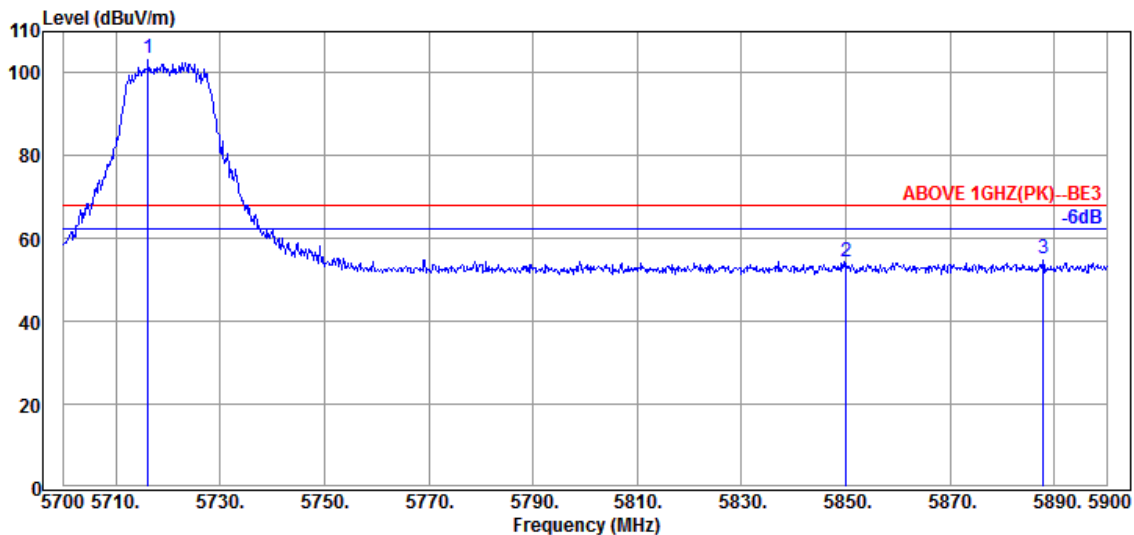


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.200	34.50	8.85	39.23	99.61	103.73	---	---	Peak
5850.000	34.40	8.96	39.26	50.18	54.28	68.20	13.92	Peak
5887.800	34.47	9.01	39.27	50.93	55.14	68.20	13.06	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

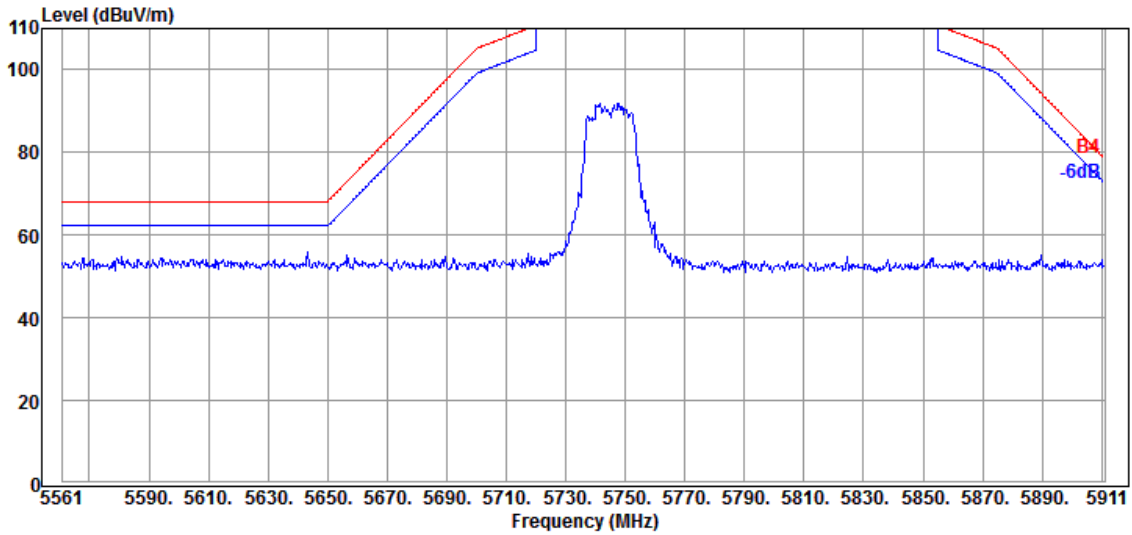


Antenna at Vertical Polarization

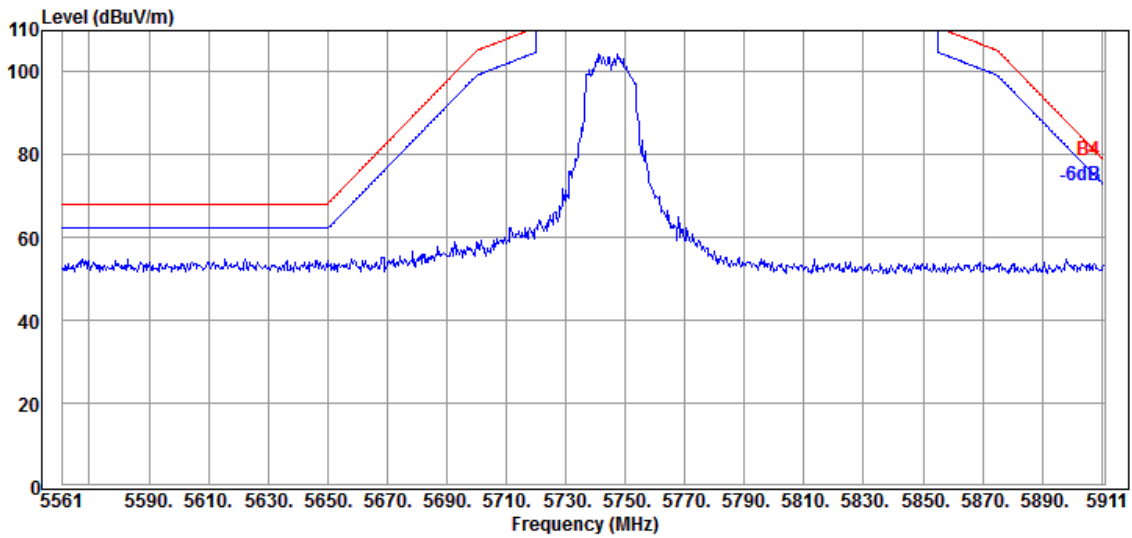


Mode	802.11a	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

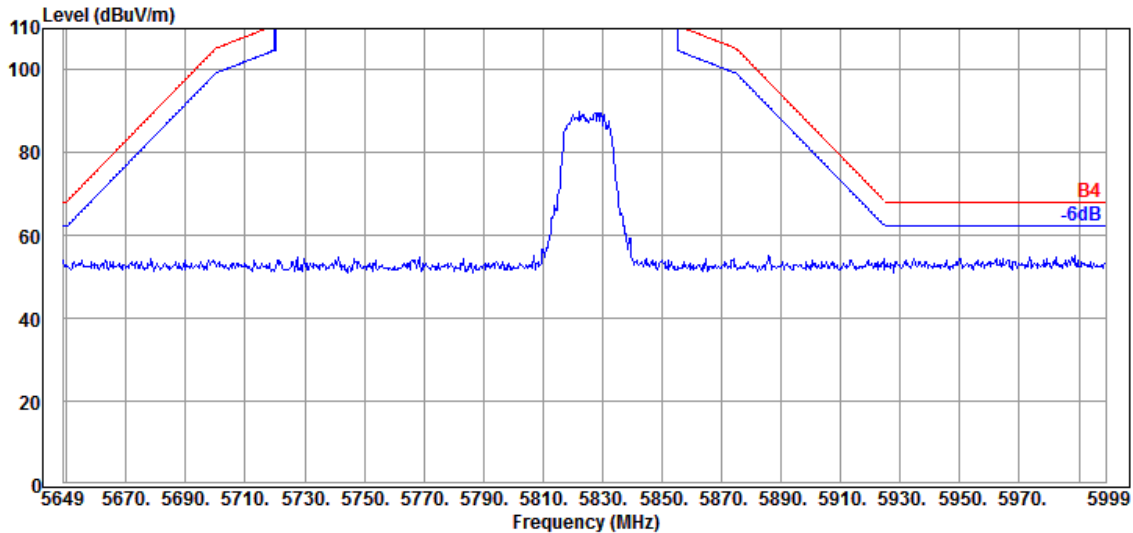

Antenna at Vertical Polarization

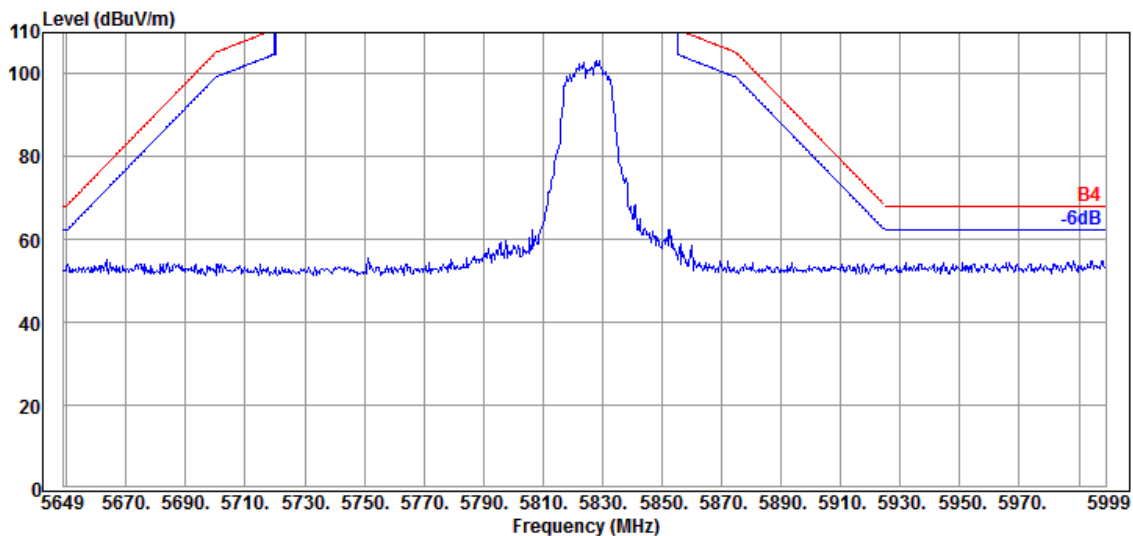


Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

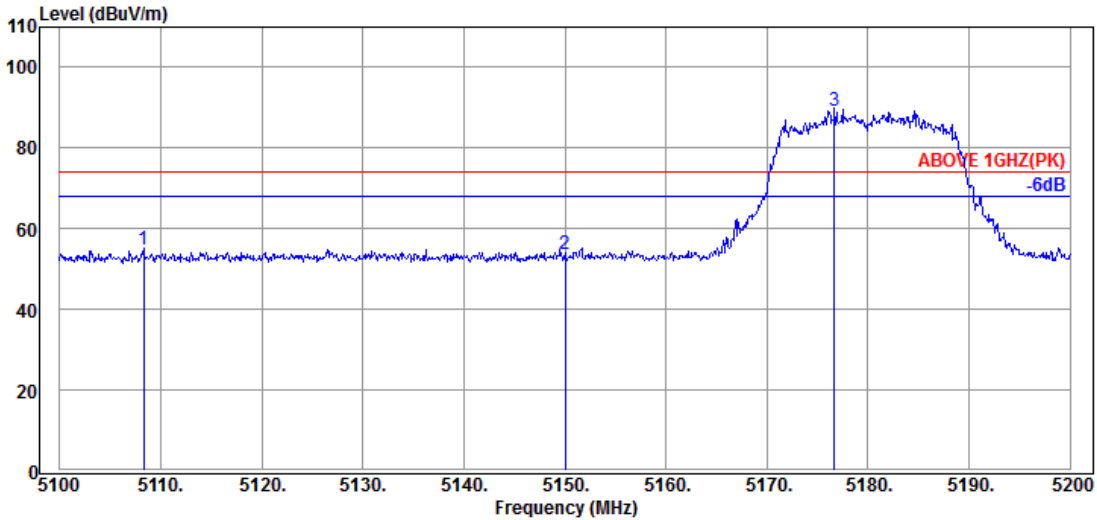

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.300	33.90	8.36	39.22	51.59	54.63	74.00	19.37	Peak
5150.000	34.10	8.39	39.21	50.45	53.73	74.00	20.27	Peak
@ 5176.700	34.23	8.41	39.21	85.89	89.32	---	---	Peak

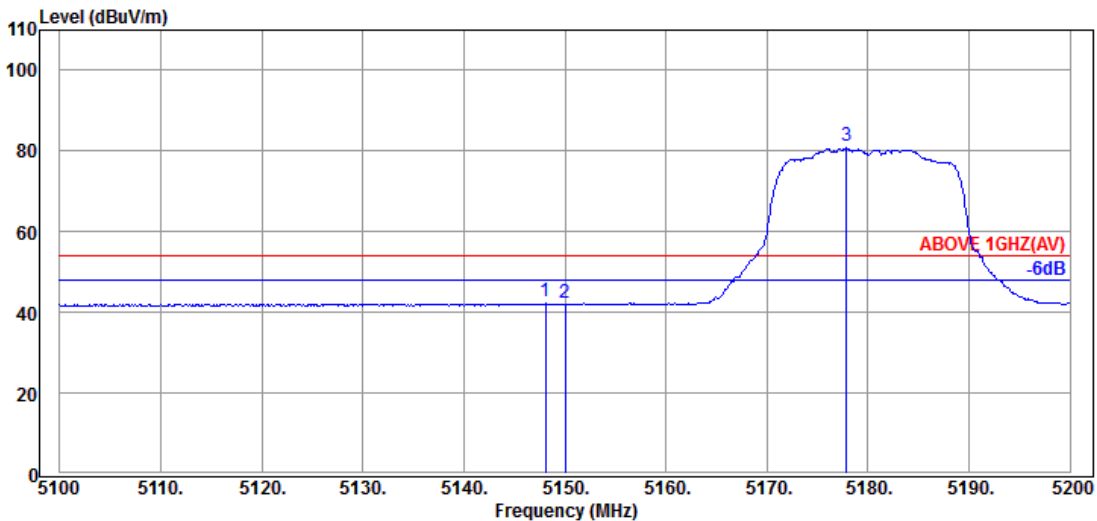


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.10	8.39	39.21	39.45	42.73	54.00	11.27	Average
5150.000	34.10	8.39	39.21	39.14	42.42	54.00	11.58	Average
@ 5177.900	34.23	8.41	39.21	77.79	81.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

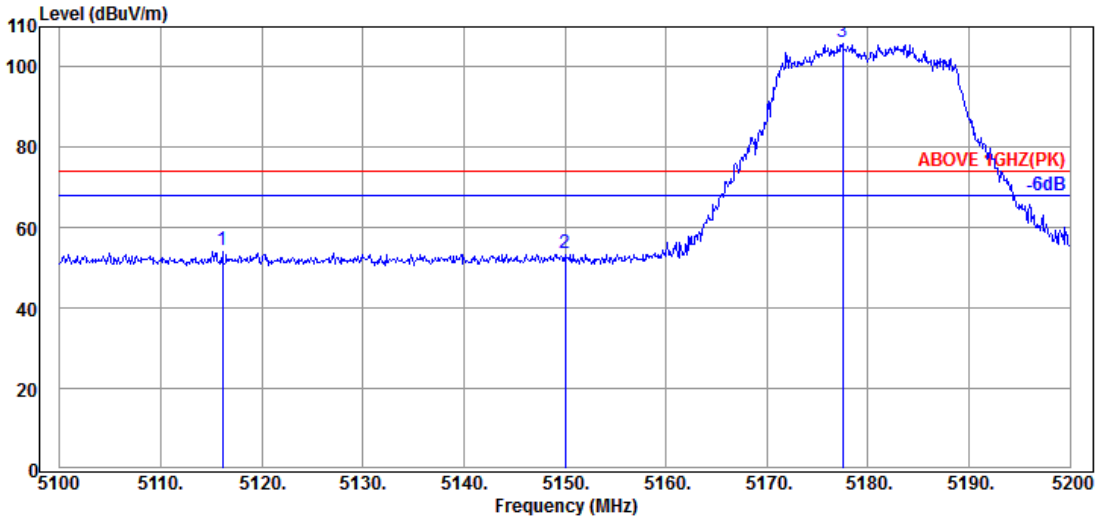

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.100	33.97	8.36	39.22	51.49	54.60	74.00	19.40	Peak
5150.000	34.10	8.39	39.21	50.45	53.73	74.00	20.27	Peak
@ 5177.500	34.23	8.41	39.21	102.82	106.25	---	---	Peak

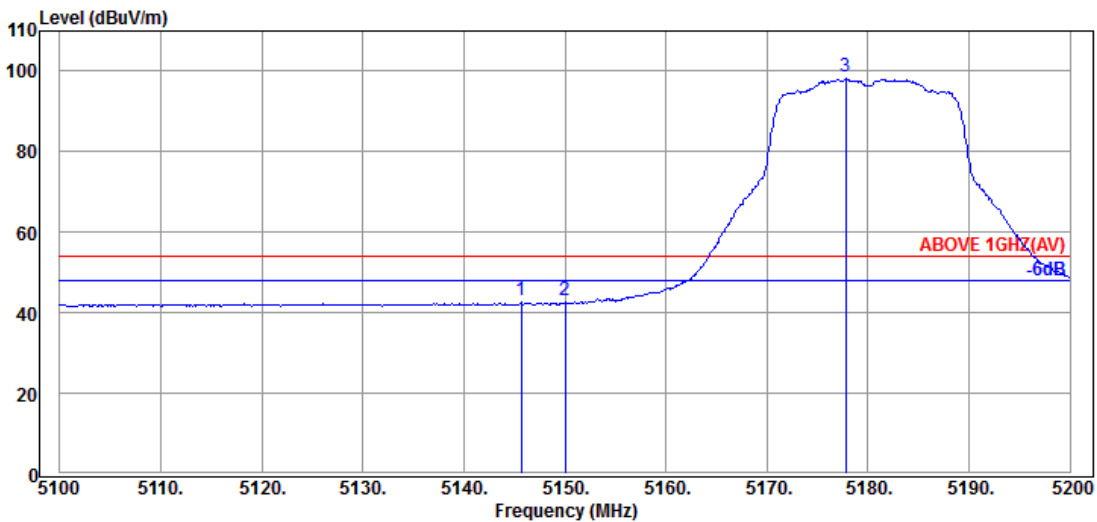


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	34.10	8.39	39.21	39.73	43.01	54.00	10.99	Average
5150.000	34.10	8.39	39.21	39.65	42.93	54.00	11.07	Average
@ 5177.800	34.23	8.41	39.21	95.09	98.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

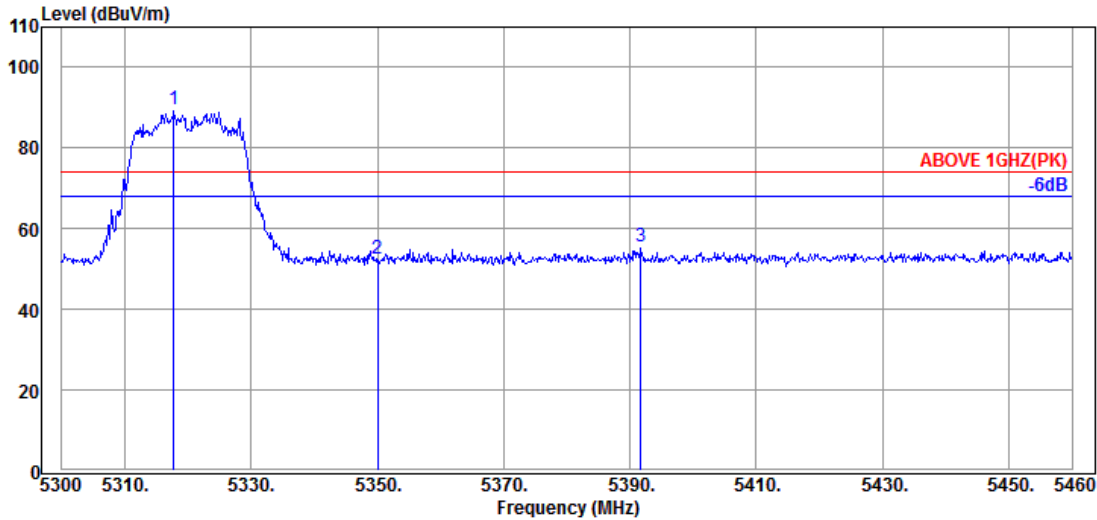

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.760	34.53	8.53	39.19	85.79	89.66	---	---	Peak
5350.080	34.60	8.56	39.19	48.72	52.69	74.00	21.31	Peak
5391.680	34.70	8.58	39.18	51.40	55.50	74.00	18.50	Peak

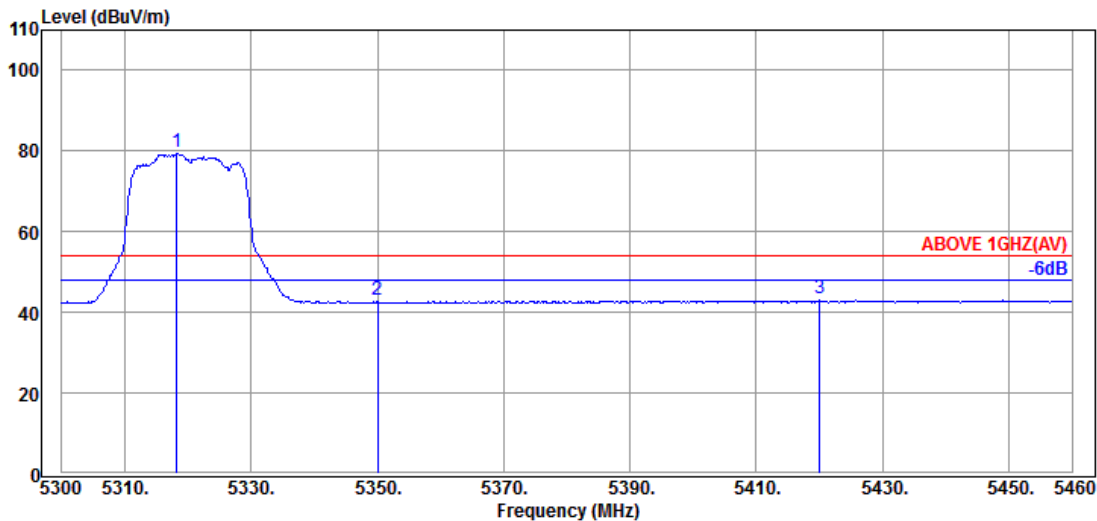


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.240	34.53	8.53	39.19	76.01	79.88	---	---	Average
5350.080	34.60	8.56	39.19	39.10	43.07	54.00	10.93	Average
5420.000	34.65	8.61	39.18	39.52	43.60	54.00	10.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

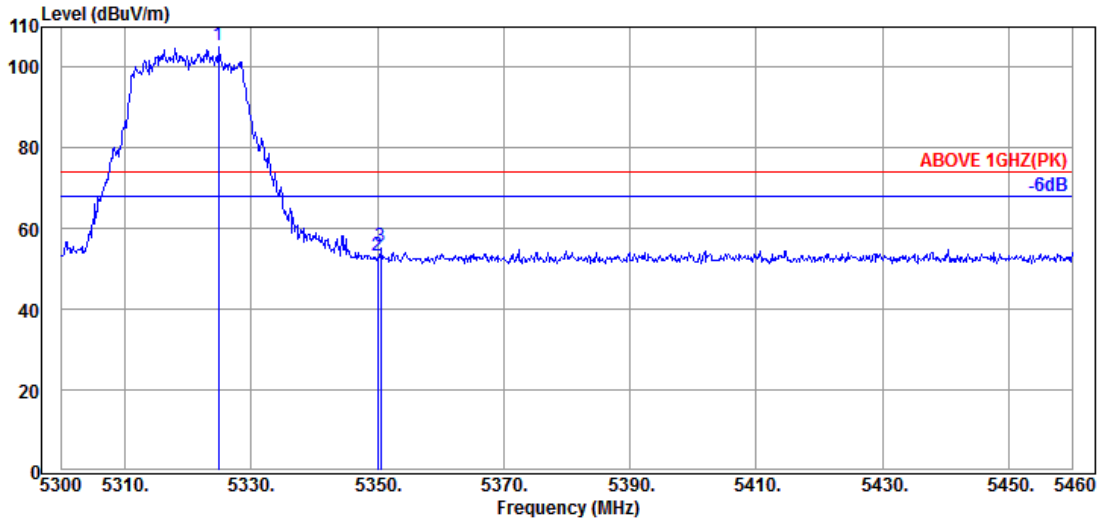

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.800	34.57	8.53	39.19	101.42	105.33	---	---	Peak
5350.080	34.60	8.56	39.19	49.42	53.39	74.00	20.61	Peak
5350.560	34.60	8.56	39.19	51.45	55.42	74.00	18.58	Peak

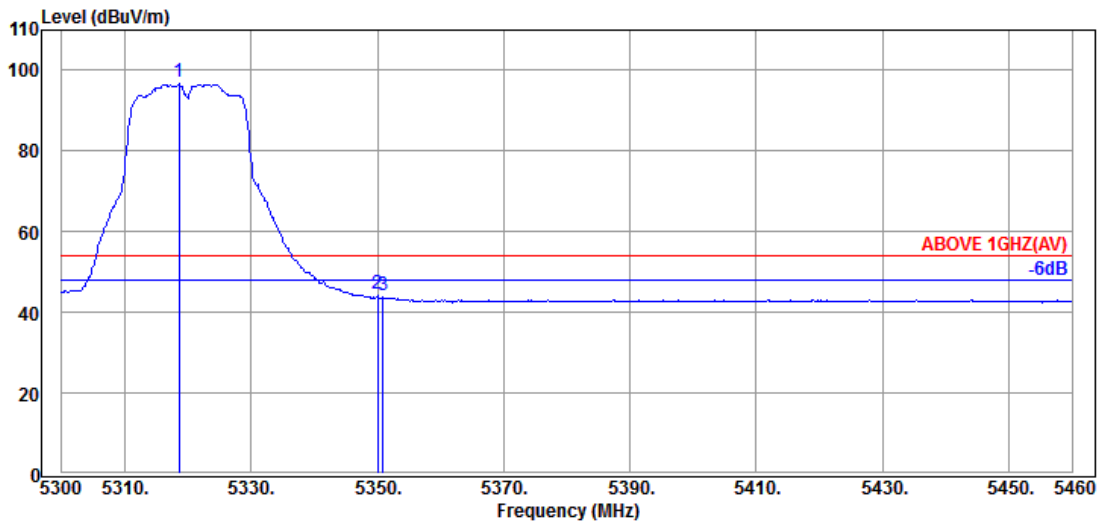


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.560	34.53	8.53	39.19	93.45	97.32	---	---	Average
5350.080	34.60	8.56	39.19	40.45	44.42	54.00	9.58	Average
5350.880	34.60	8.56	39.19	40.34	44.31	54.00	9.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

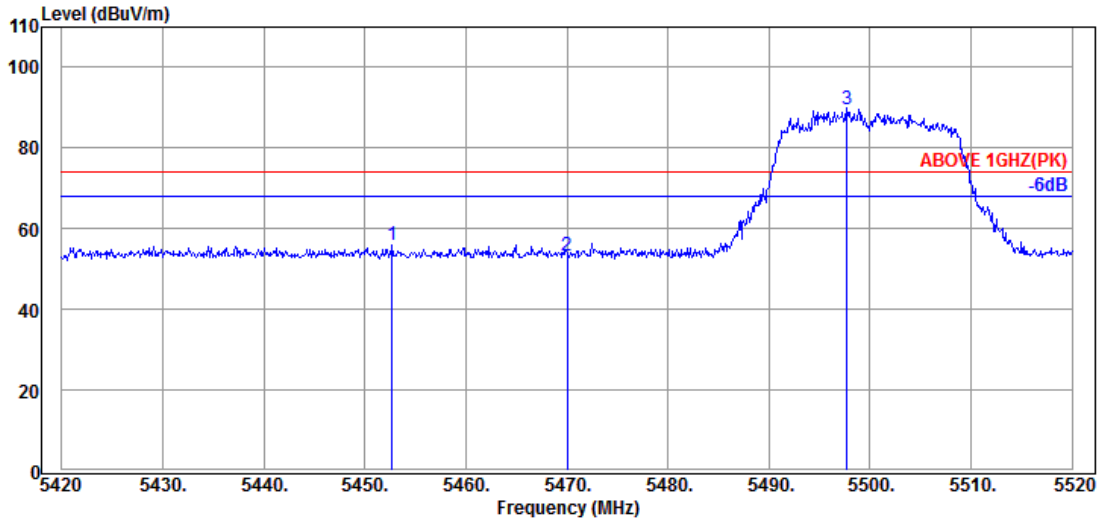

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.700	34.60	8.64	39.17	51.69	55.76	74.00	18.24	Peak
5470.000	34.57	8.65	39.17	49.33	53.38	74.00	20.62	Peak
@ 5497.700	34.50	8.68	39.17	85.48	89.49	---	---	Peak

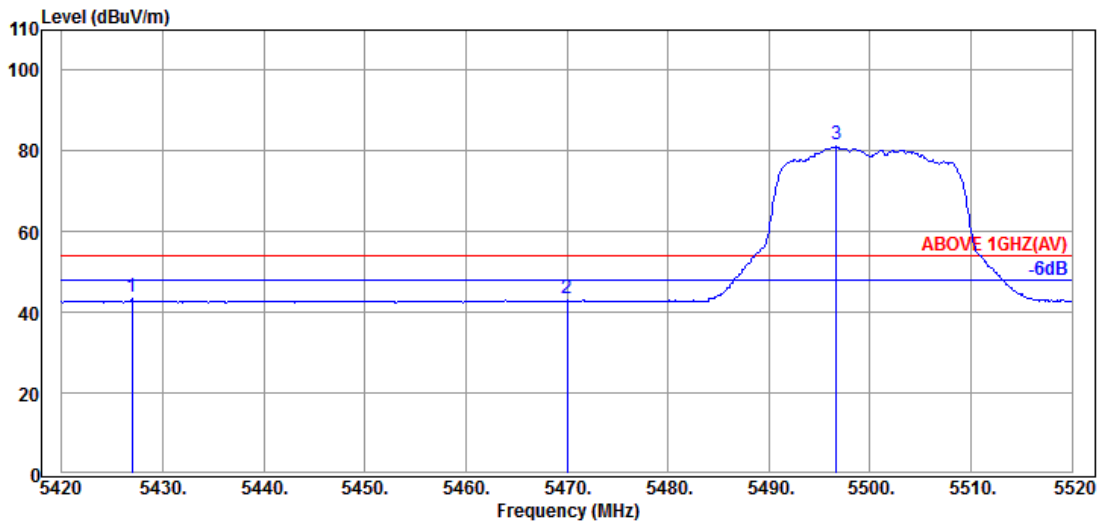


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.000	34.65	8.61	39.18	39.59	43.67	54.00	10.33	Average
5470.000	34.57	8.65	39.17	39.34	43.39	54.00	10.61	Average
@ 5496.700	34.50	8.68	39.17	77.60	81.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

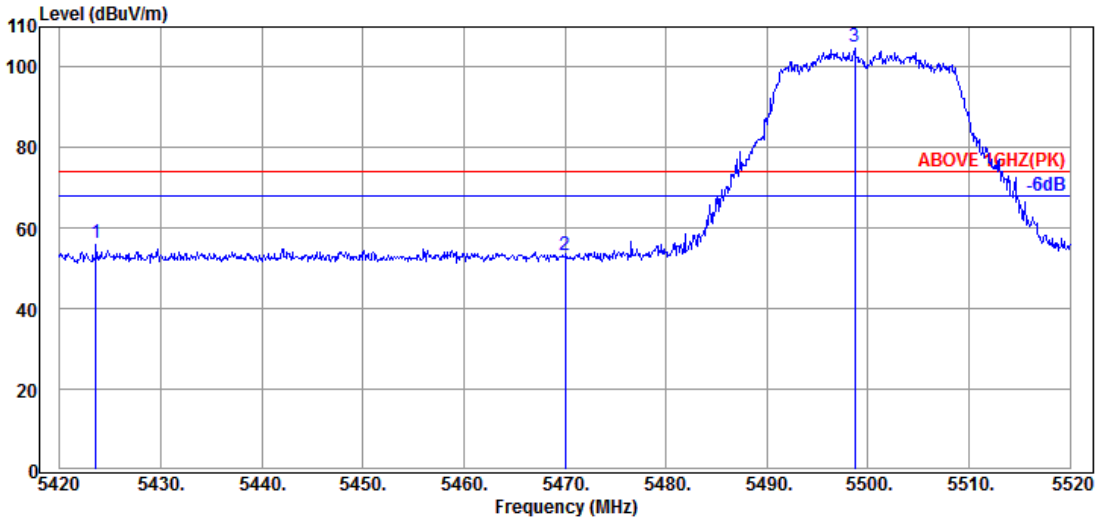

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.600	34.65	8.61	39.18	52.21	56.29	74.00	17.71	Peak
5470.000	34.57	8.65	39.17	49.36	53.41	74.00	20.59	Peak
@ 5498.700	34.50	8.68	39.17	101.11	105.12	---	---	Peak

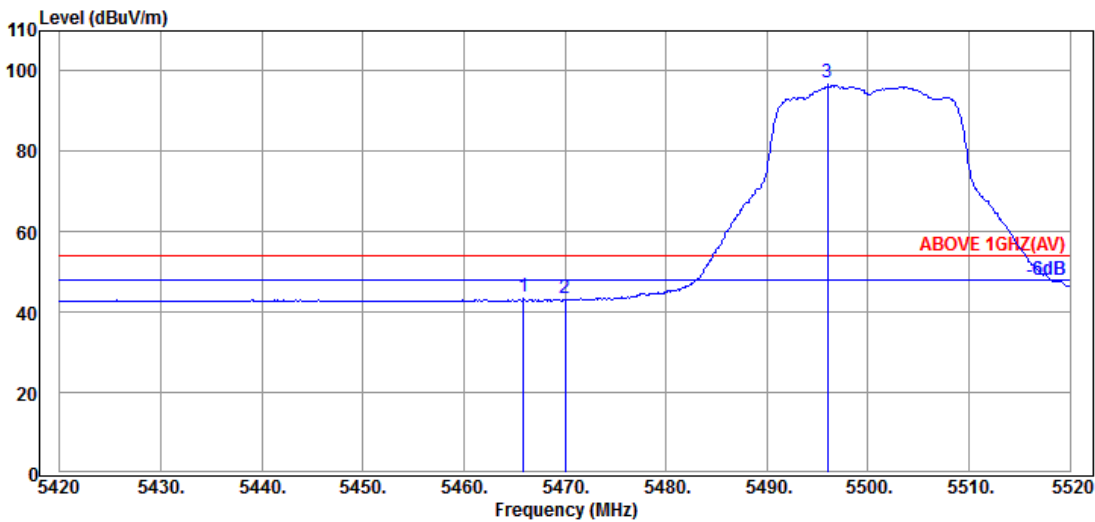


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.57	8.65	39.17	39.85	43.90	54.00	10.10	Average
5470.000	34.57	8.65	39.17	39.57	43.62	54.00	10.38	Average
@ 5496.000	34.50	8.67	39.17	93.01	97.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5700MHz

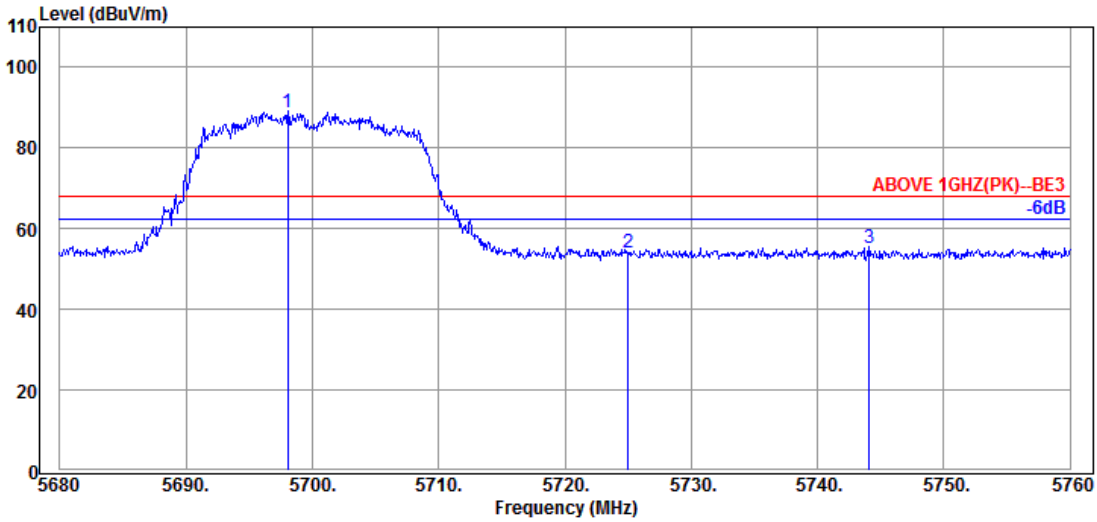

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.080	34.50	8.84	39.22	84.78	88.90	---	---	Peak
5725.040	34.50	8.86	39.23	49.85	53.98	68.20	14.22	Peak
5744.080	34.50	8.88	39.23	51.20	55.35	68.20	12.85	Peak

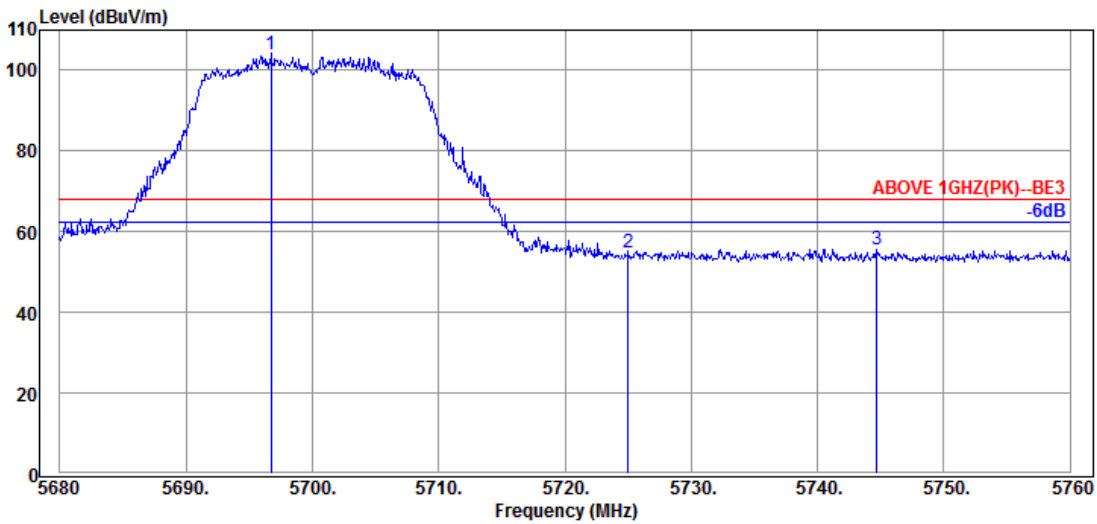


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.720	34.50	8.84	39.22	99.92	104.04	---	---	Peak
5725.040	34.50	8.86	39.23	50.69	54.82	68.20	13.38	Peak
5744.720	34.50	8.88	39.23	51.25	55.40	68.20	12.80	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

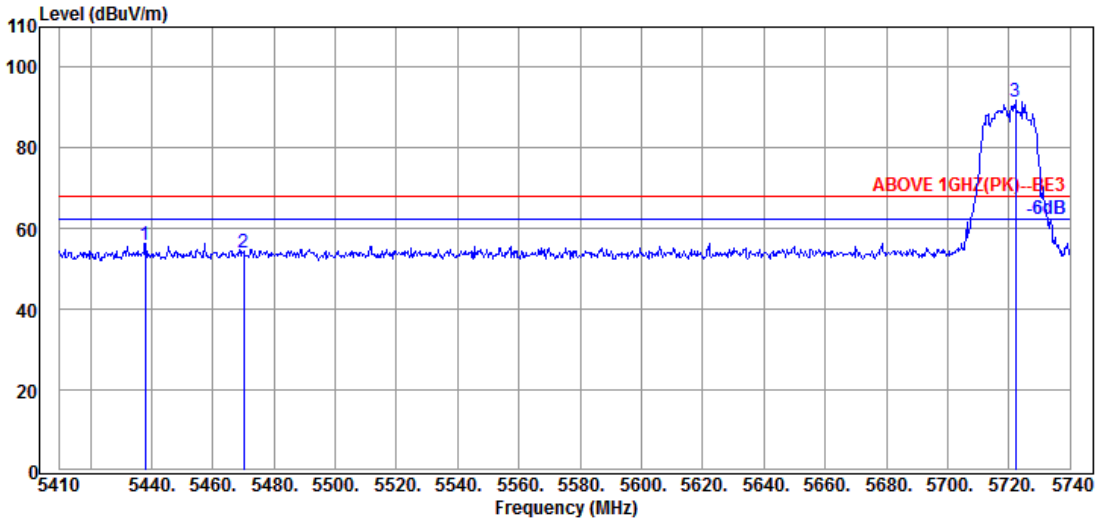

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.050	34.62	8.63	39.18	51.95	56.02	68.20	12.18	Peak
5470.060	34.57	8.65	39.17	49.88	53.93	68.20	14.27	Peak
@ 5722.180	34.50	8.86	39.23	87.39	91.52	---	---	Peak

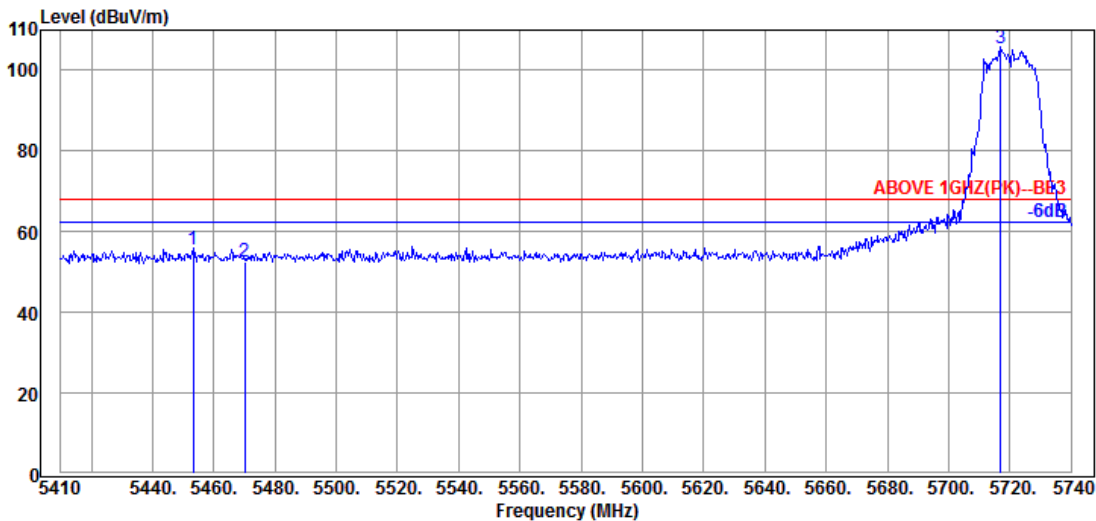


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.230	34.60	8.64	39.17	51.56	55.63	68.20	12.57	Peak
5470.060	34.57	8.65	39.17	48.64	52.69	68.20	15.51	Peak
@ 5716.900	34.50	8.85	39.23	101.41	105.53	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

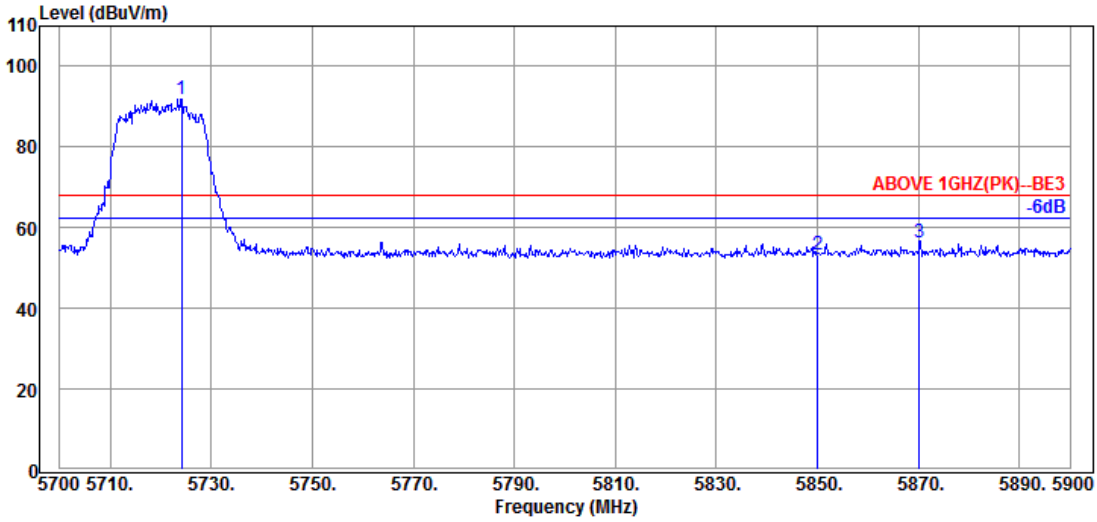

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.200	34.50	8.86	39.23	87.62	91.75	---	---	Peak
5850.000	34.40	8.96	39.26	49.30	53.40	68.20	14.80	Peak
5870.200	34.43	8.98	39.27	52.34	56.48	68.20	11.72	Peak

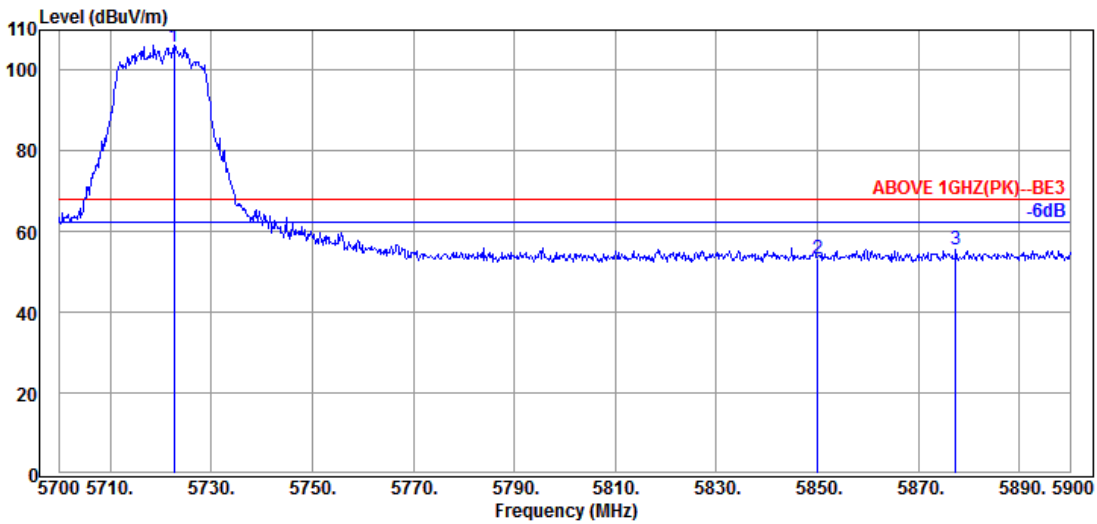


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.600	34.50	8.86	39.23	101.87	106.00	---	---	Peak
5850.000	34.40	8.96	39.26	49.36	53.46	68.20	14.74	Peak
5877.400	34.47	8.99	39.27	51.29	55.48	68.20	12.72	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

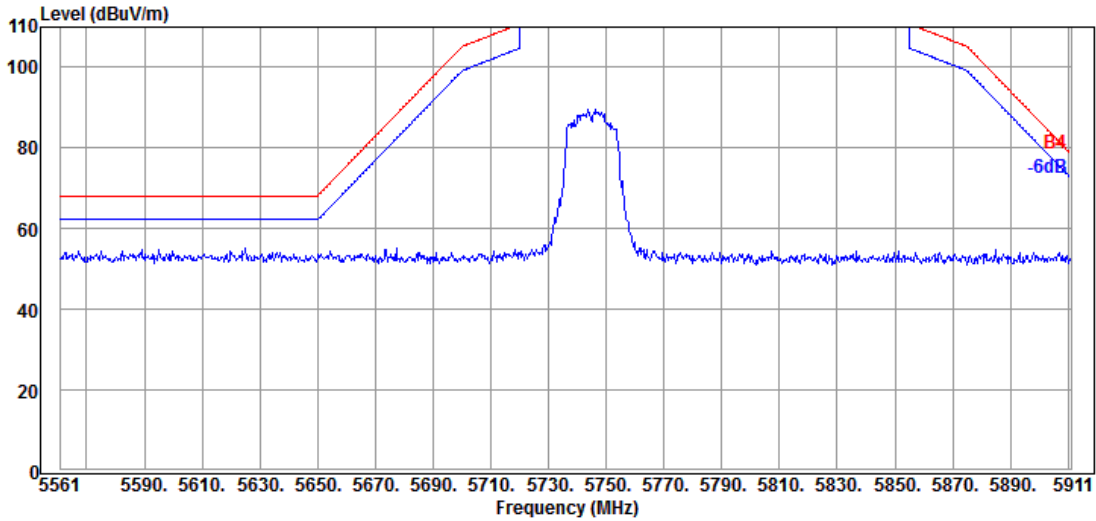


Antenna at Vertical Polarization

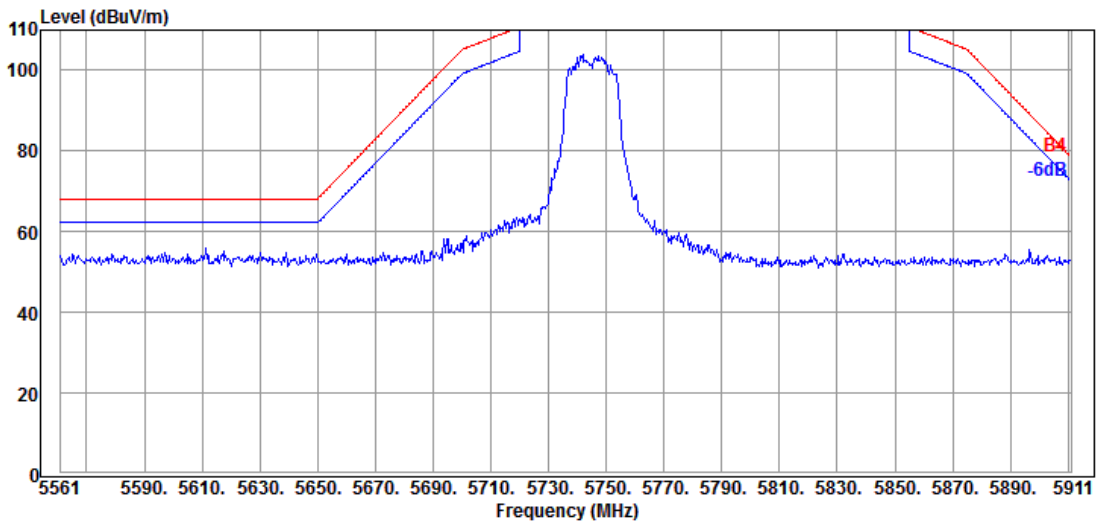


Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

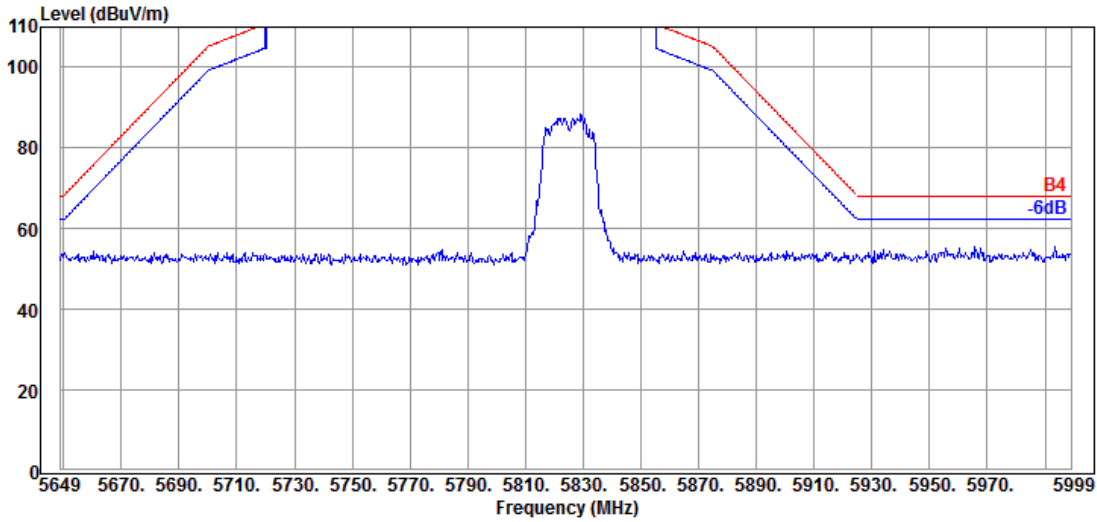

Antenna at Vertical Polarization

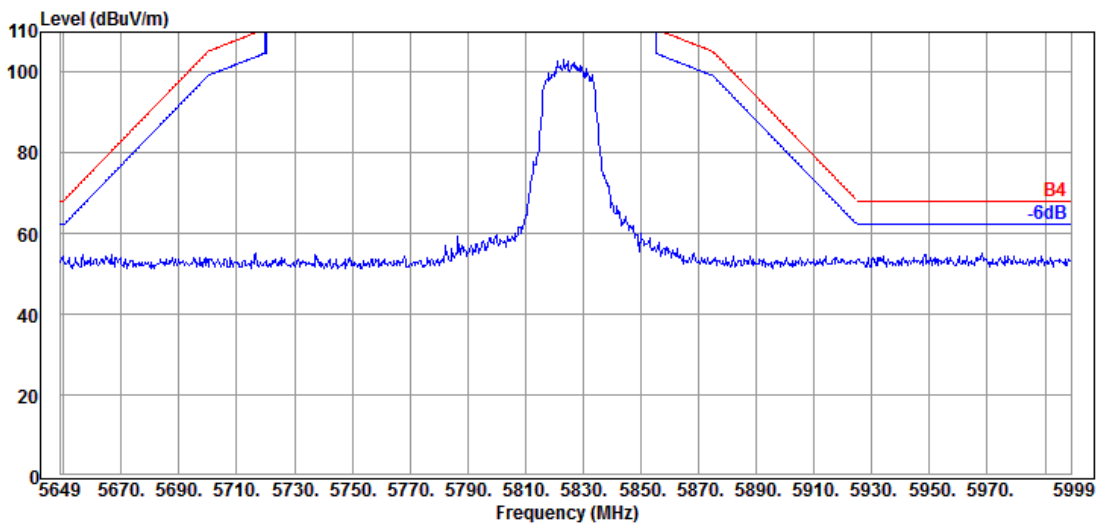


Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

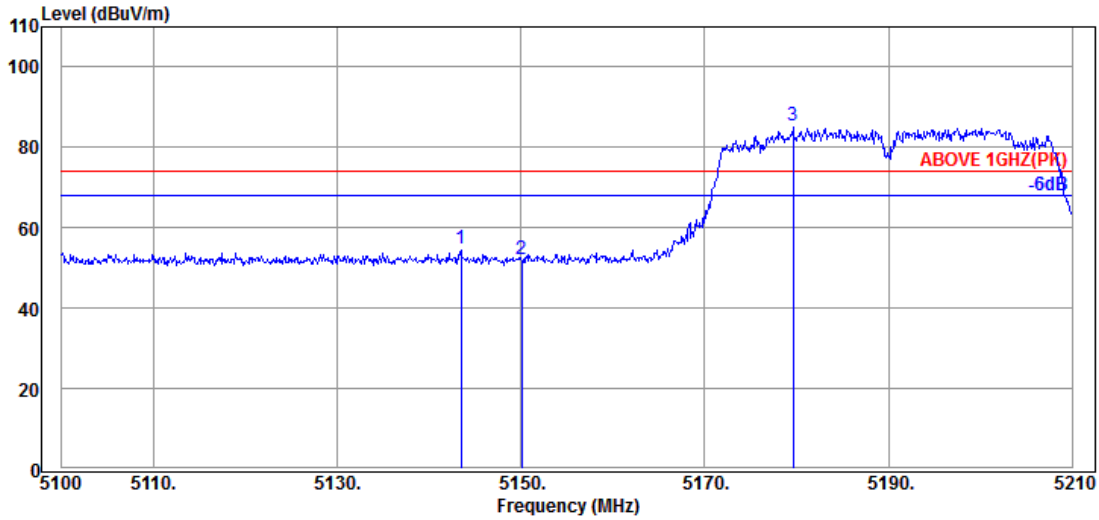

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.450	34.10	8.39	39.21	51.35	54.63	74.00	19.37	Peak
5150.050	34.10	8.39	39.21	48.91	52.19	74.00	21.81	Peak
@ 5179.640	34.23	8.41	39.21	81.92	85.35	---	---	Peak

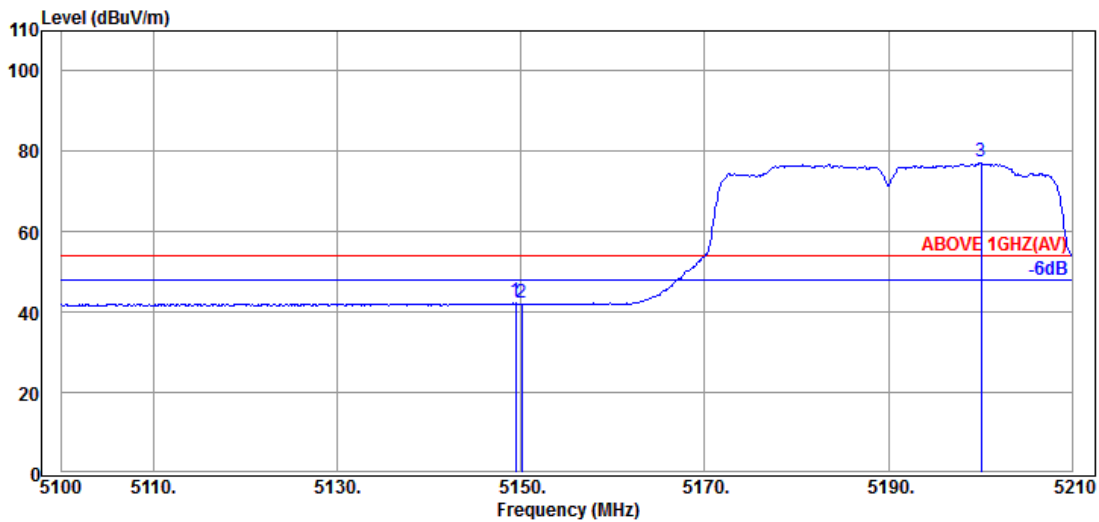


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.10	8.39	39.21	39.46	42.74	54.00	11.26	Average
5150.050	34.10	8.39	39.21	39.08	42.36	54.00	11.64	Average
@ 5200.100	34.30	8.43	39.21	74.06	77.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

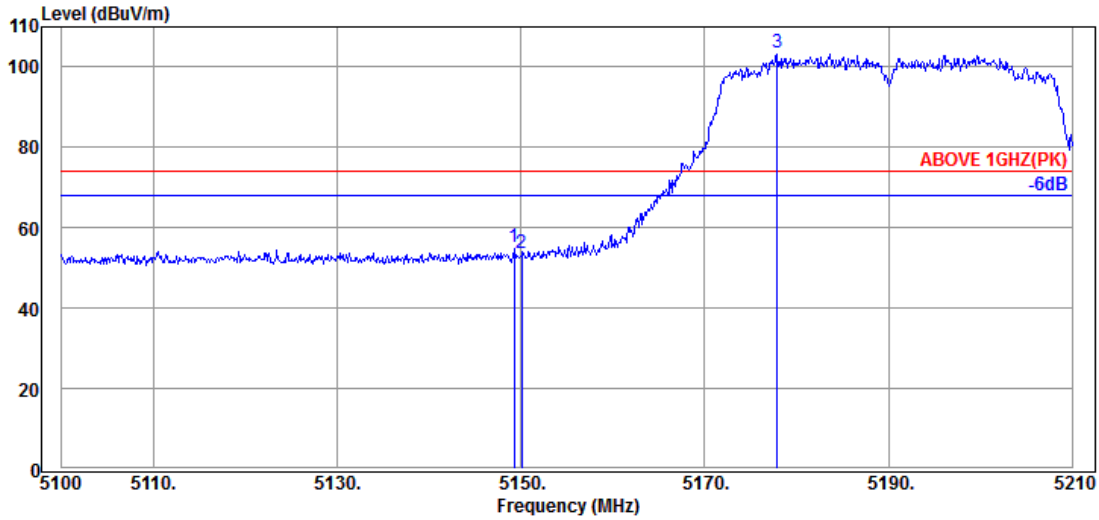

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.10	8.39	39.21	51.76	55.04	74.00	18.96	Peak
5150.050	34.10	8.39	39.21	50.46	53.74	74.00	20.26	Peak
@ 5177.880	34.23	8.41	39.21	100.26	103.69	---	---	Peak

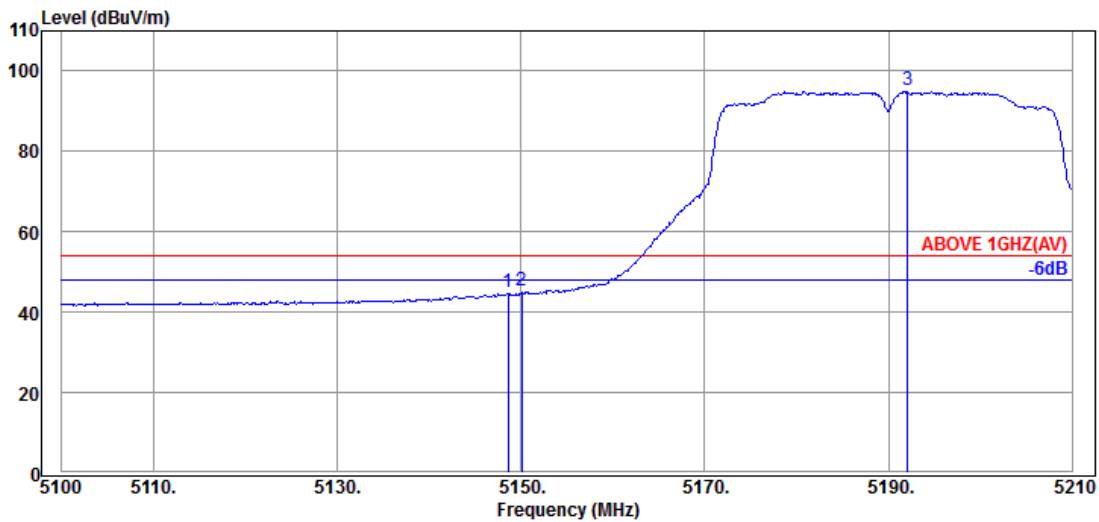


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.620	34.10	8.39	39.21	41.81	45.09	54.00	8.91	Average
5150.050	34.10	8.39	39.21	42.11	45.39	54.00	8.61	Average
@ 5192.070	34.30	8.43	39.21	91.79	95.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

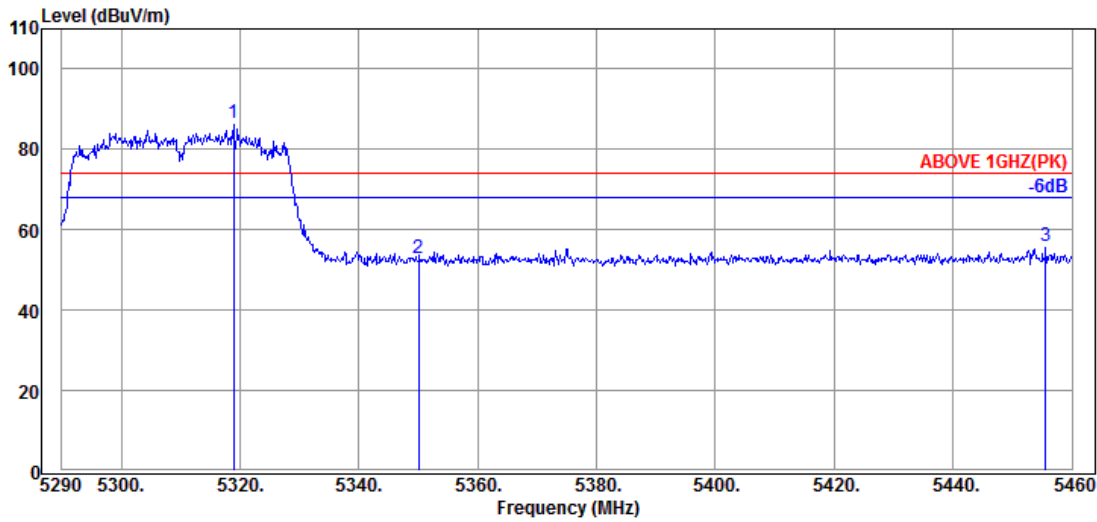

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.900	34.53	8.53	39.19	82.51	86.38	---	---	Peak
5350.010	34.60	8.56	39.19	48.86	52.83	74.00	21.17	Peak
5455.580	34.60	8.64	39.17	51.81	55.88	74.00	18.12	Peak

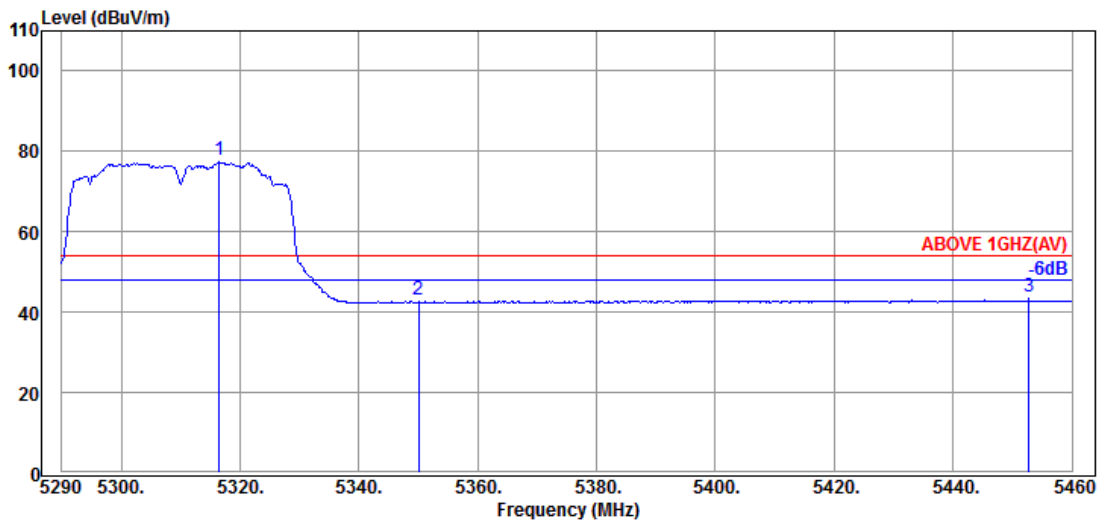


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.520	34.53	8.53	39.19	73.96	77.83	---	---	Average
5350.010	34.60	8.56	39.19	39.10	43.07	54.00	10.93	Average
5452.690	34.60	8.64	39.17	39.77	43.84	54.00	10.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

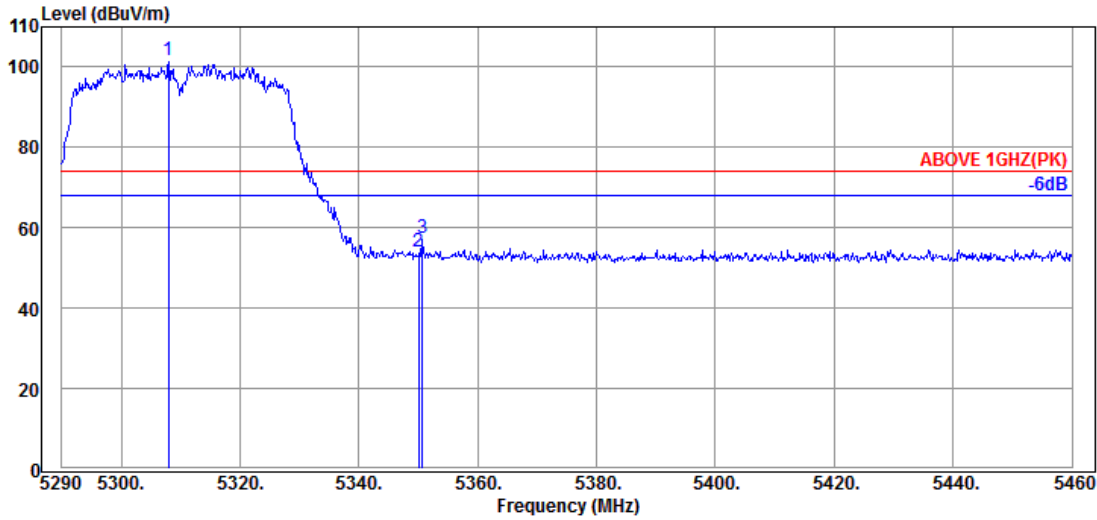

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.020	34.53	8.51	39.19	97.73	101.58	---	---	Peak
5350.010	34.60	8.56	39.19	49.91	53.88	74.00	20.12	Peak
5350.690	34.60	8.56	39.19	53.37	57.34	74.00	16.66	Peak

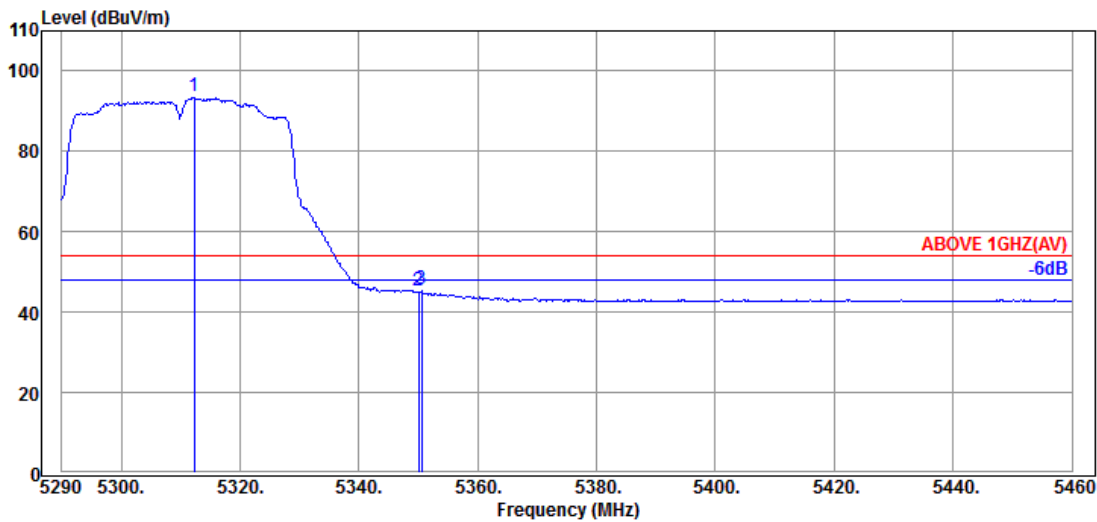


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.270	34.53	8.53	39.19	89.98	93.85	---	---	Average
5350.010	34.60	8.56	39.19	41.30	45.27	54.00	8.73	Average
5350.520	34.60	8.56	39.19	41.77	45.74	54.00	8.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

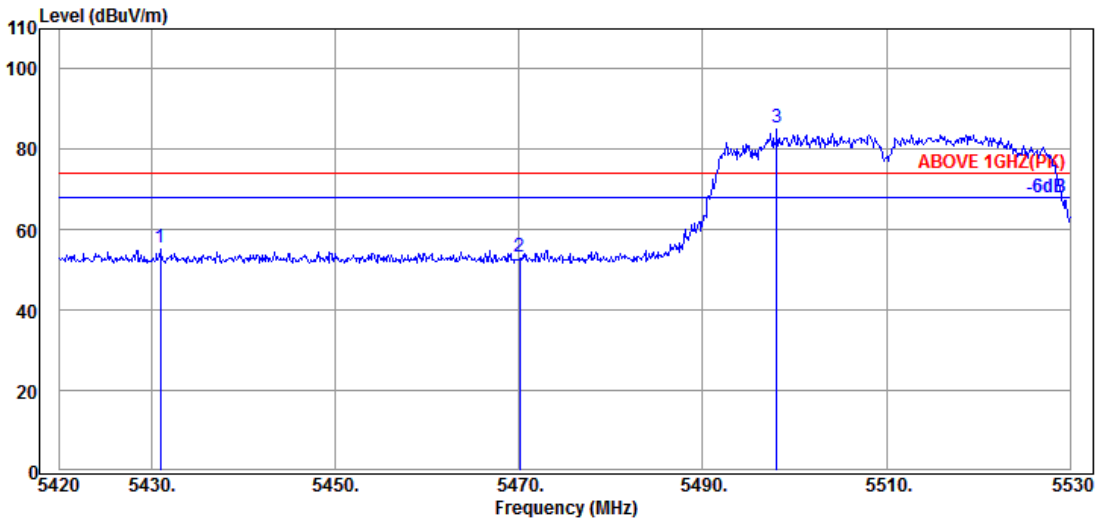

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.000	34.65	8.63	39.18	51.46	55.56	74.00	18.44	Peak
5470.050	34.57	8.65	39.17	49.41	53.46	74.00	20.54	Peak
@ 5498.100	34.50	8.68	39.17	81.25	85.26	---	---	Peak

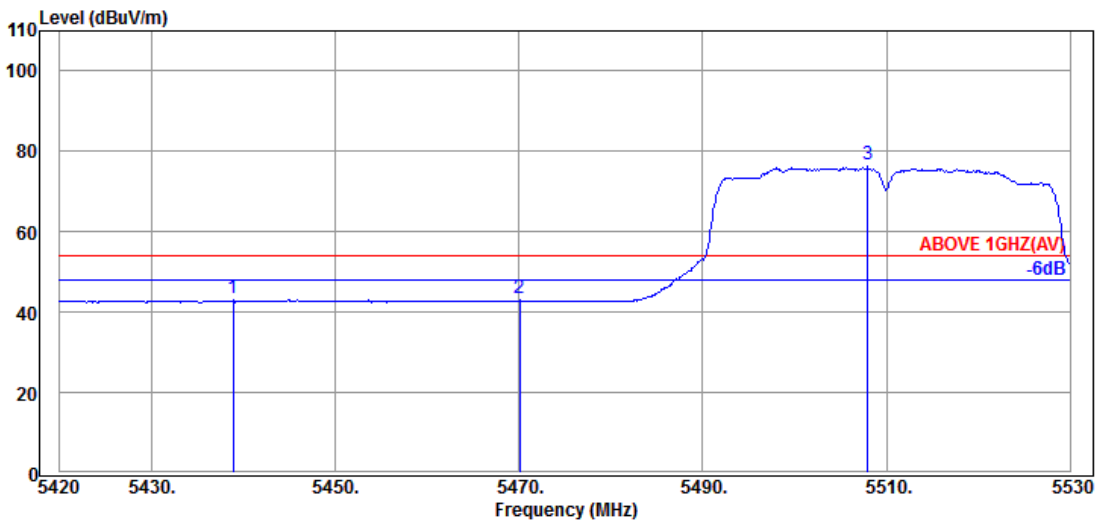


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.920	34.62	8.63	39.18	39.53	43.60	54.00	10.40	Average
5470.050	34.57	8.65	39.17	39.33	43.38	54.00	10.62	Average
@ 5508.000	34.50	8.68	39.17	72.57	76.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

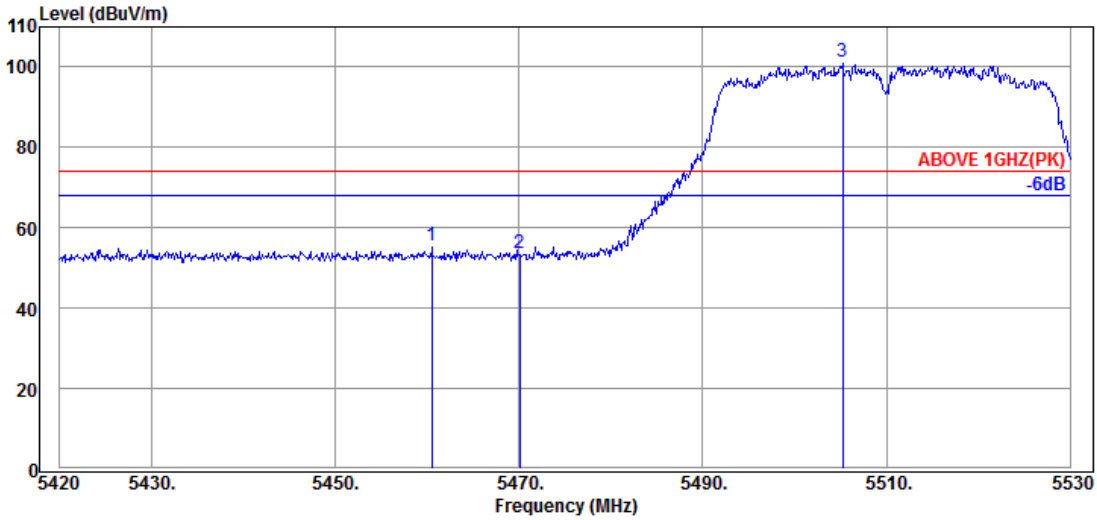

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.480	34.60	8.64	39.17	51.38	55.45	74.00	18.55	Peak
5470.050	34.57	8.65	39.17	49.76	53.81	74.00	20.19	Peak
@ 5505.250	34.50	8.68	39.17	97.45	101.46	---	---	Peak

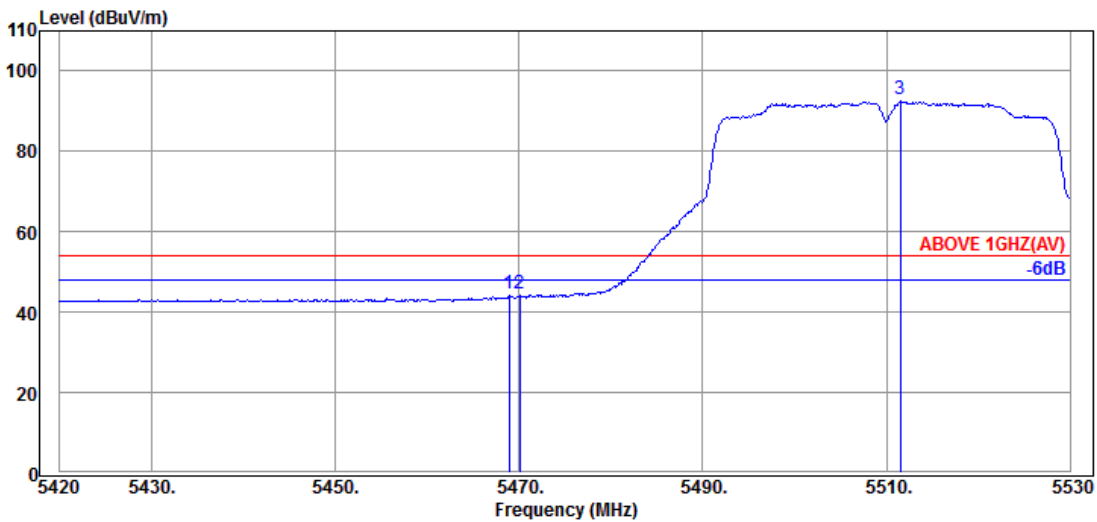


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.57	8.65	39.17	40.41	44.46	54.00	9.54	Average
5470.050	34.57	8.65	39.17	40.52	44.57	54.00	9.43	Average
@ 5511.520	34.53	8.68	39.17	88.88	92.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

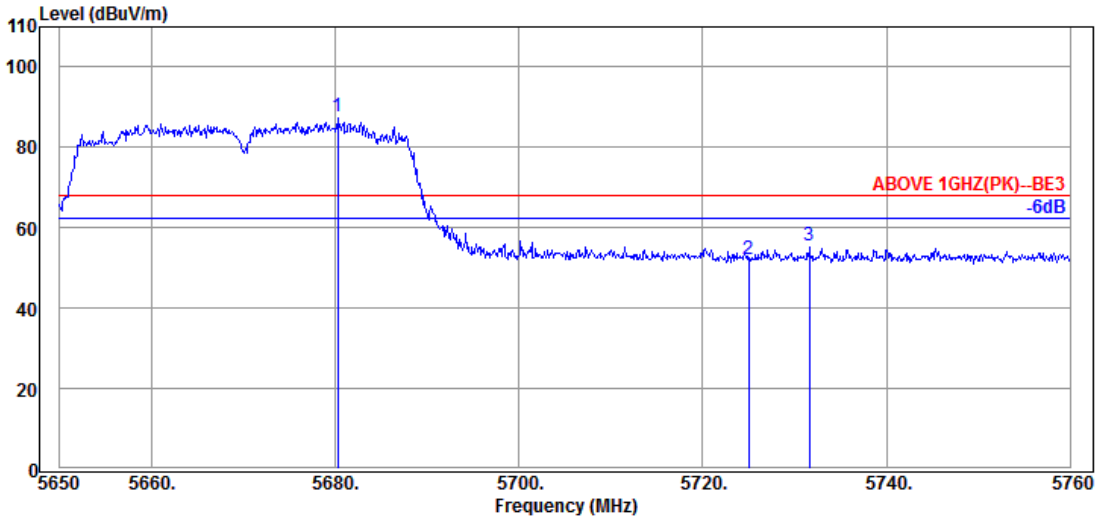

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.250	34.53	8.82	39.22	83.62	87.75	---	---	Peak
5725.020	34.50	8.86	39.23	48.19	52.32	68.20	15.88	Peak
5731.620	34.50	8.86	39.23	51.48	55.61	68.20	12.59	Peak

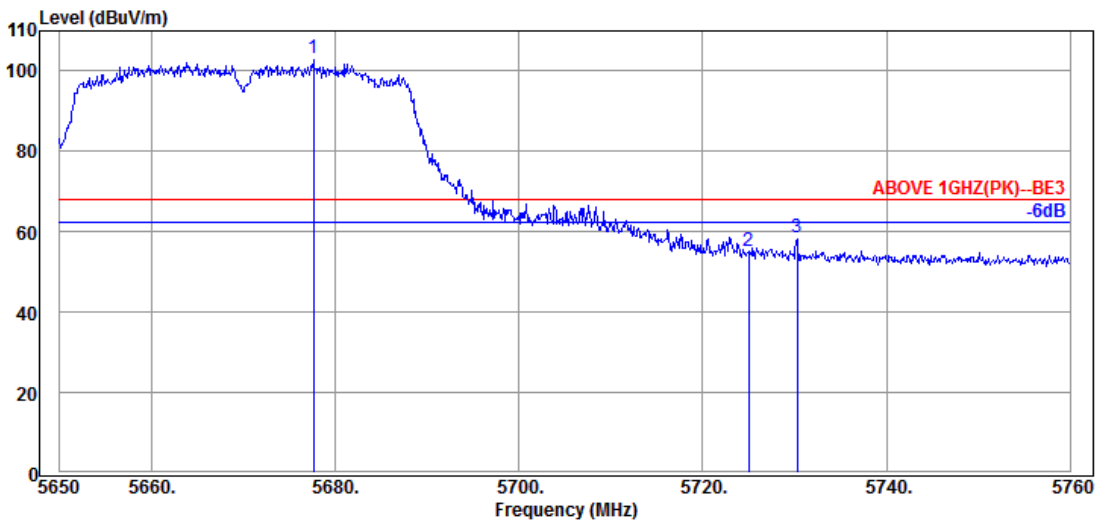


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.610	34.53	8.82	39.22	98.96	103.09	---	---	Peak
5725.020	34.50	8.86	39.23	51.04	55.17	68.20	13.03	Peak
5730.300	34.50	8.86	39.23	54.61	58.74	68.20	9.46	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

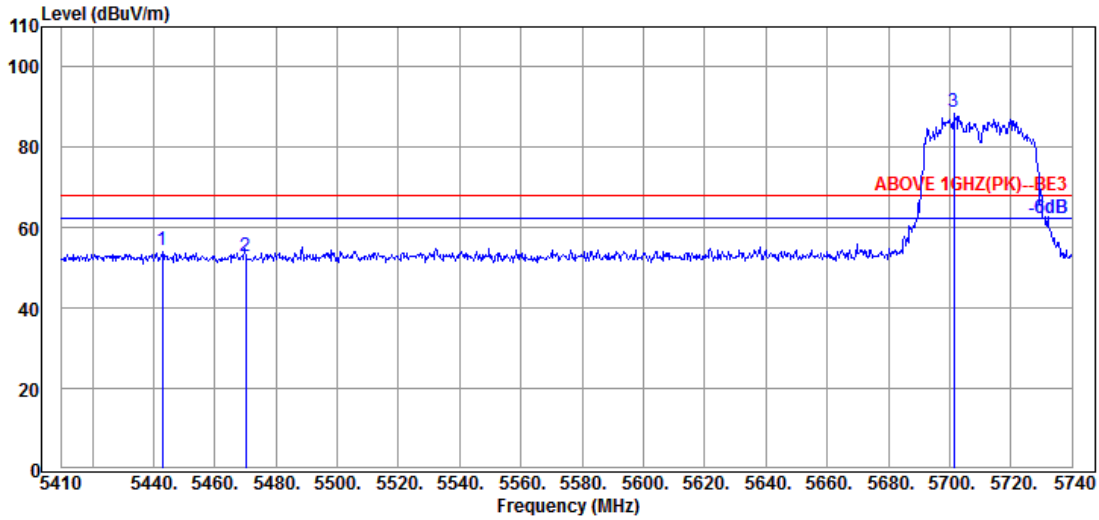

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.000	34.62	8.63	39.18	50.45	54.52	68.20	13.68	Peak
5470.060	34.57	8.65	39.17	48.81	52.86	68.20	15.34	Peak
@ 5701.390	34.50	8.85	39.22	84.55	88.68	---	---	Peak

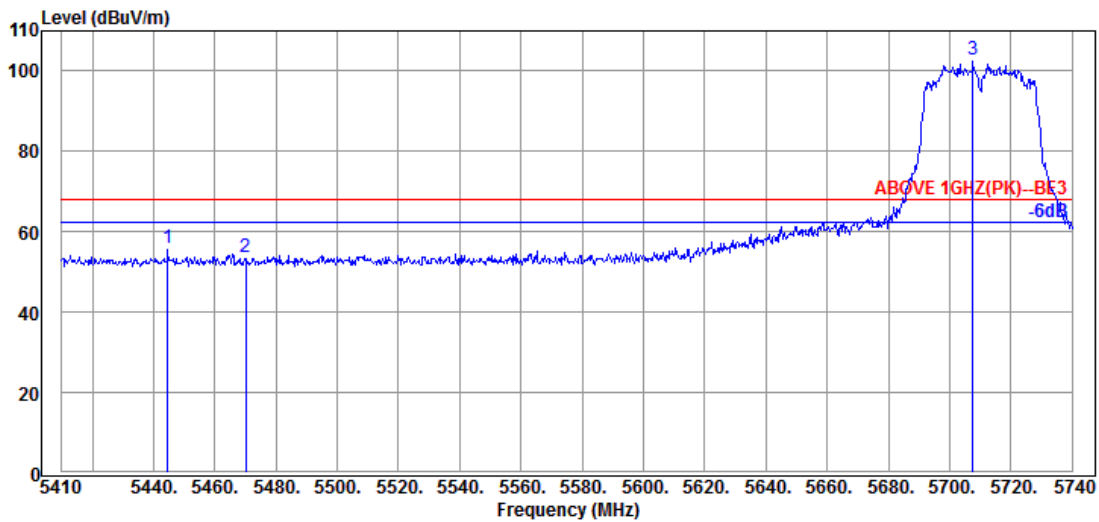


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.650	34.62	8.63	39.18	51.83	55.90	68.20	12.30	Peak
5470.060	34.57	8.65	39.17	49.78	53.83	68.20	14.37	Peak
@ 5707.660	34.50	8.85	39.23	98.72	102.84	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

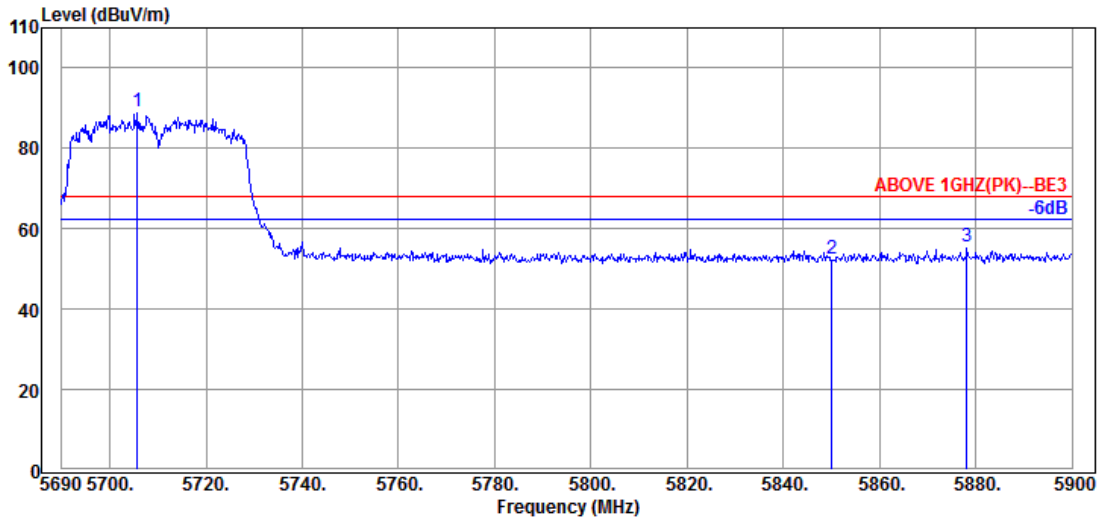

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.750	34.50	8.85	39.22	85.12	89.25	---	---	Peak
5850.020	34.40	8.96	39.26	48.47	52.57	68.20	15.63	Peak
5878.160	34.47	8.99	39.27	51.43	55.62	68.20	12.58	Peak

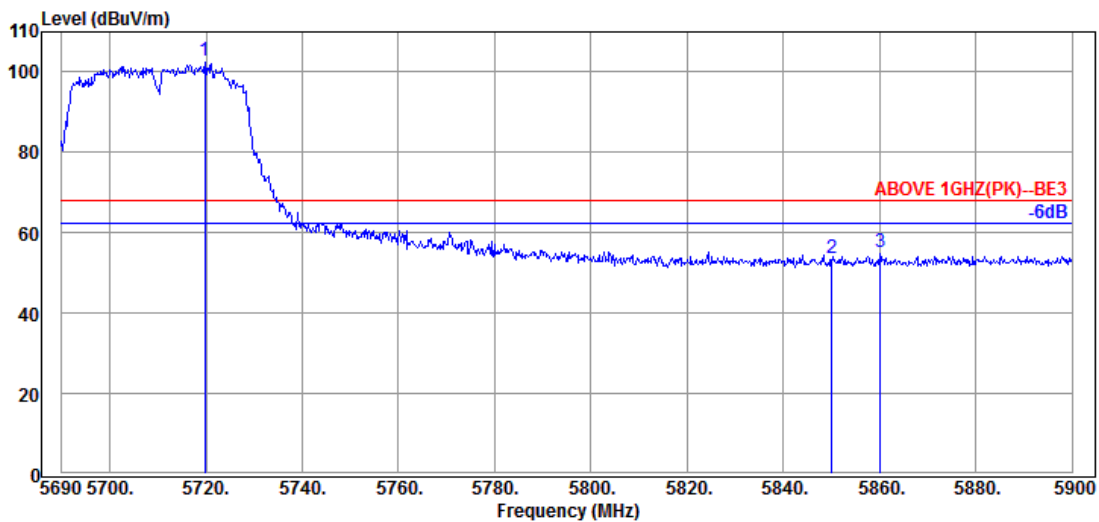


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.820	34.50	8.86	39.23	98.57	102.70	---	---	Peak
5850.020	34.40	8.96	39.26	49.56	53.66	68.20	14.54	Peak
5860.100	34.43	8.98	39.27	50.95	55.09	68.20	13.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

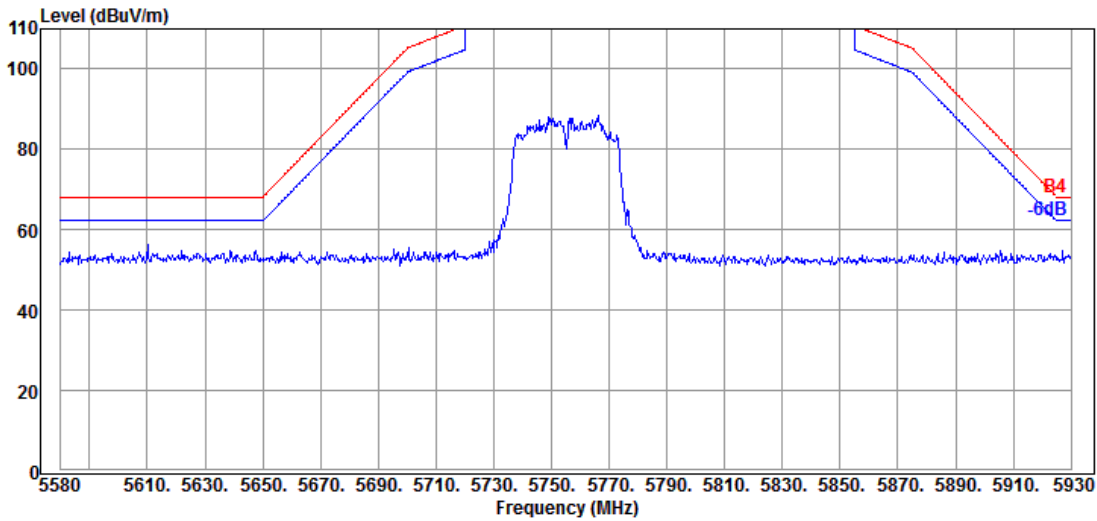


Antenna at Vertical Polarization

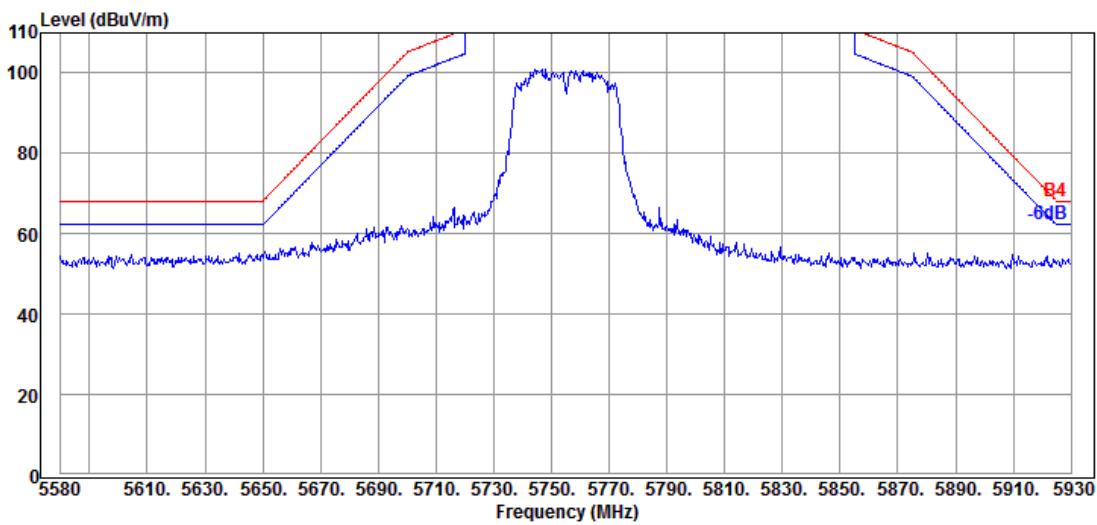


Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

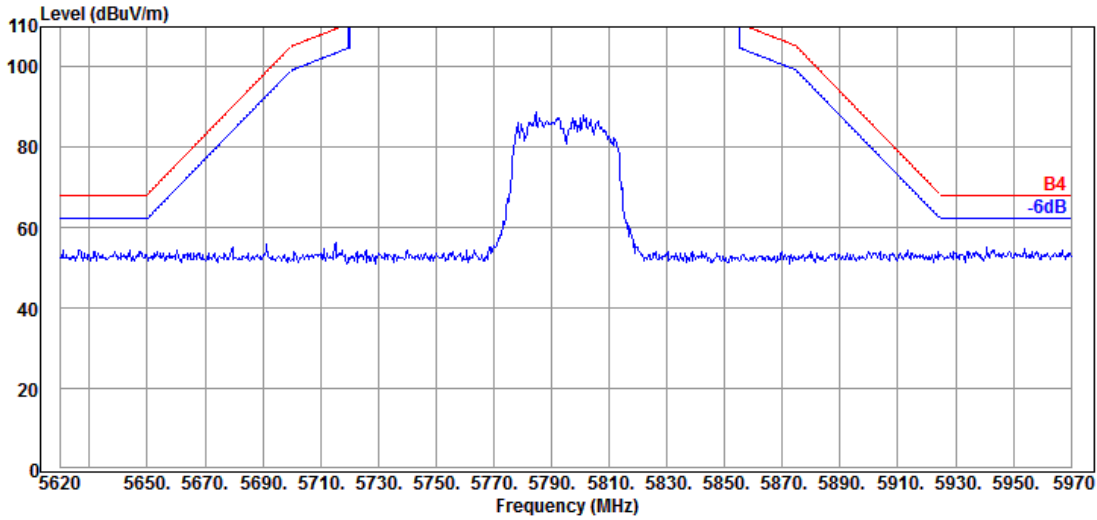

Antenna at Vertical Polarization

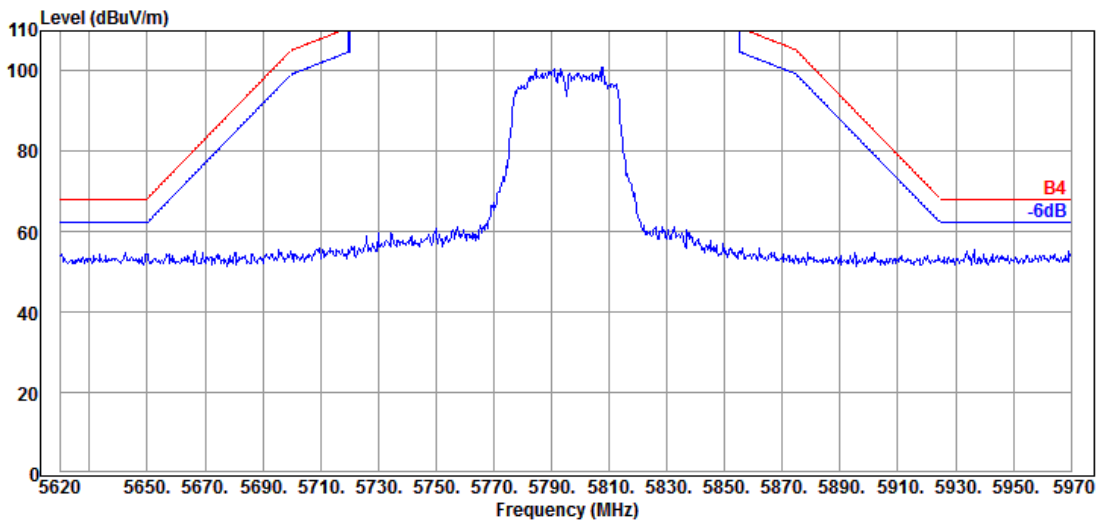


Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

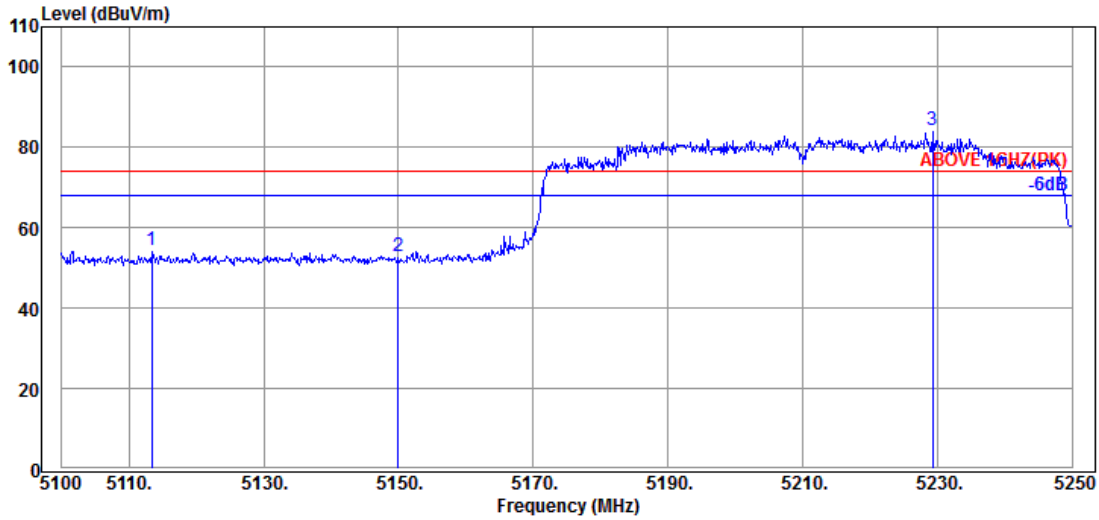

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.350	33.97	8.36	39.22	51.47	54.58	74.00	19.42	Peak
5149.950	34.10	8.39	39.21	49.81	53.09	74.00	20.91	Peak
@ 5229.300	34.40	8.46	39.20	80.70	84.36	---	---	Peak

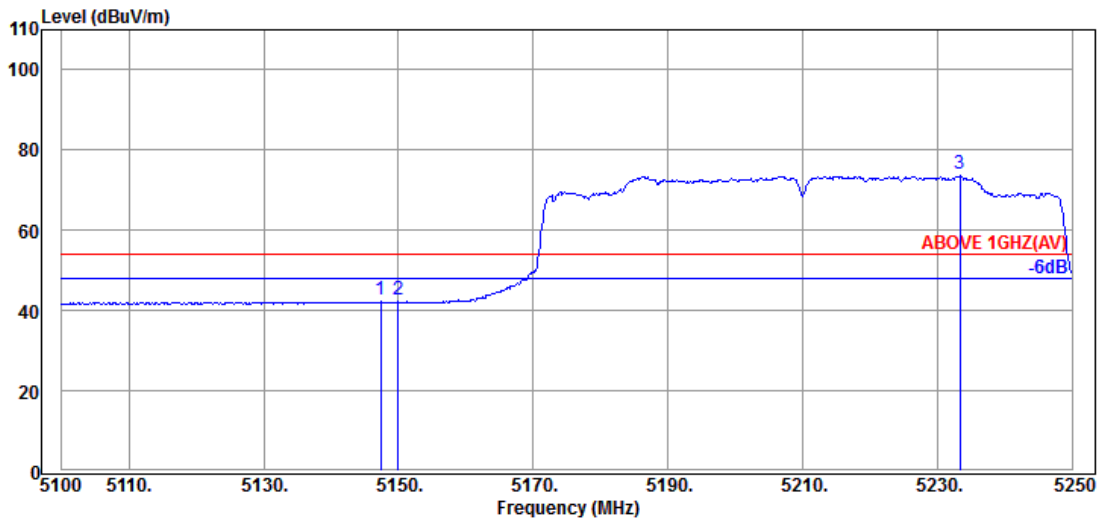


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	34.10	8.39	39.21	39.40	42.68	54.00	11.32	Average
5149.950	34.10	8.39	39.21	39.29	42.57	54.00	11.43	Average
@ 5233.350	34.45	8.46	39.20	70.45	74.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

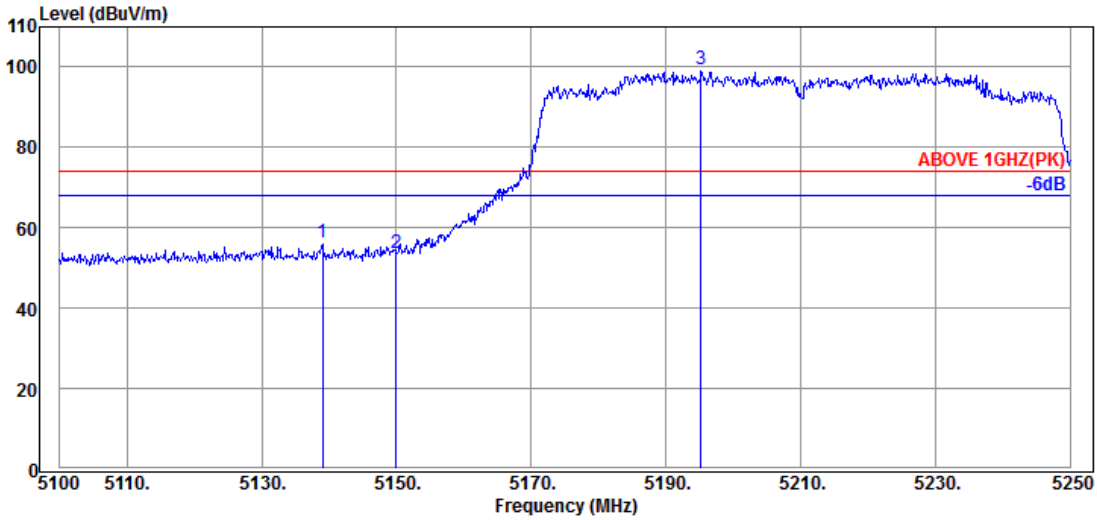

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.000	34.03	8.37	39.21	53.22	56.41	74.00	17.59	Peak
5149.950	34.10	8.39	39.21	50.23	53.51	74.00	20.49	Peak
@ 5195.250	34.30	8.43	39.21	95.71	99.23	---	---	Peak

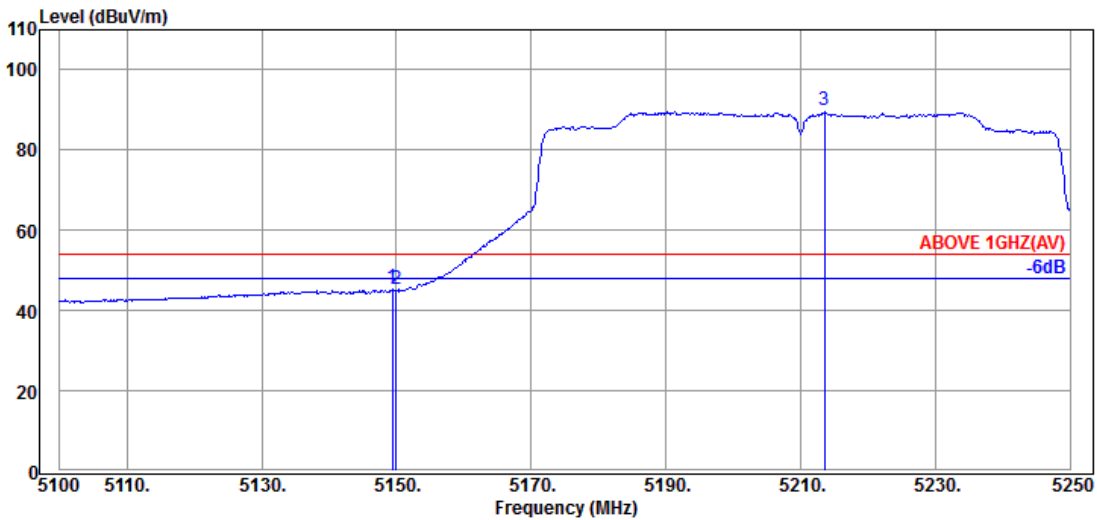


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.10	8.39	39.21	42.39	45.67	54.00	8.33	Average
5149.950	34.10	8.39	39.21	42.04	45.32	54.00	8.68	Average
@ 5213.550	34.35	8.44	39.20	86.51	90.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

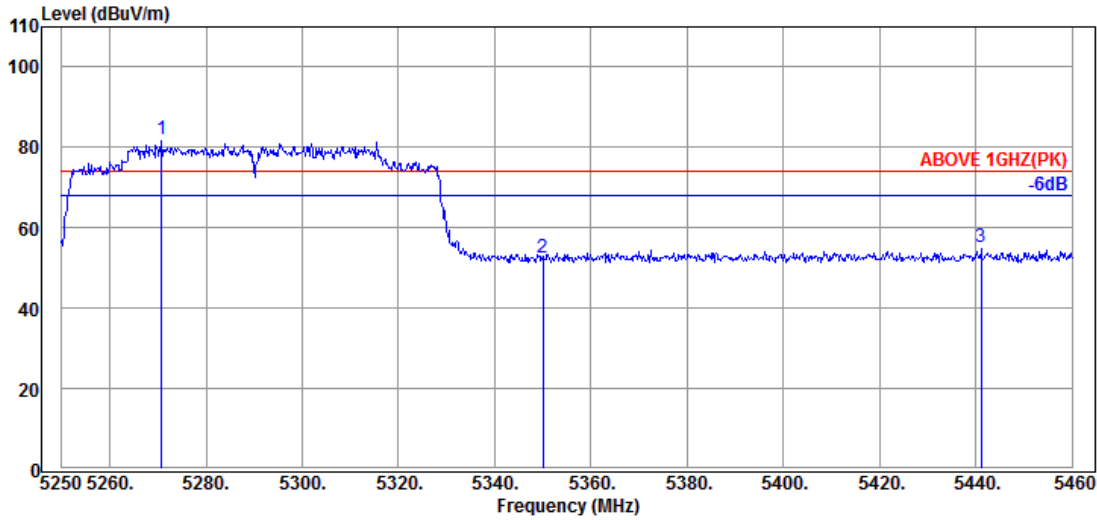

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.790	34.50	8.49	39.20	78.09	81.88	---	---	Peak
5349.960	34.60	8.56	39.19	48.59	52.56	74.00	21.44	Peak
5441.100	34.62	8.63	39.18	51.03	55.10	74.00	18.90	Peak

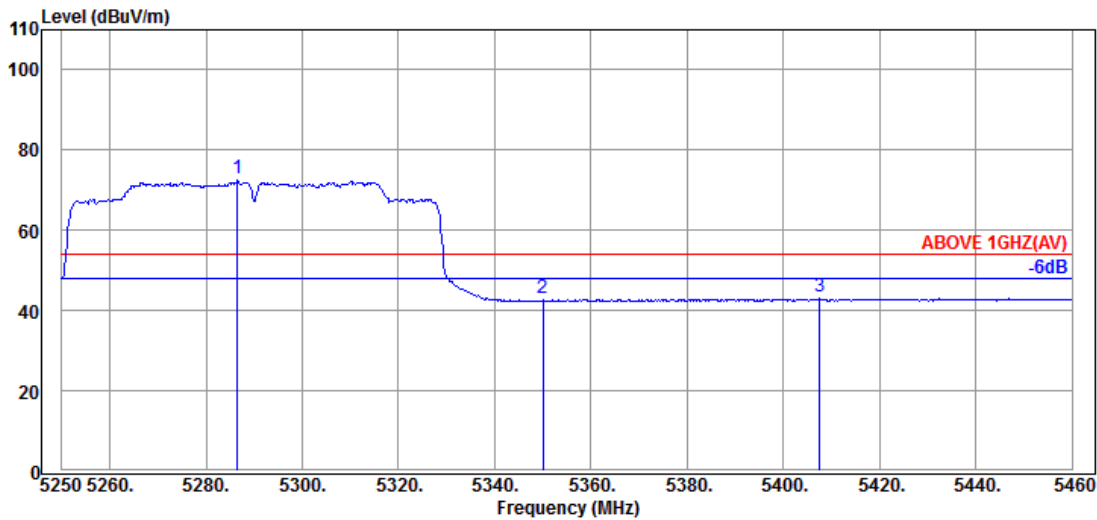


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.540	34.50	8.50	39.19	69.08	72.89	---	---	Average
5349.960	34.60	8.56	39.19	39.10	43.07	54.00	10.93	Average
5407.500	34.67	8.60	39.18	39.47	43.56	54.00	10.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

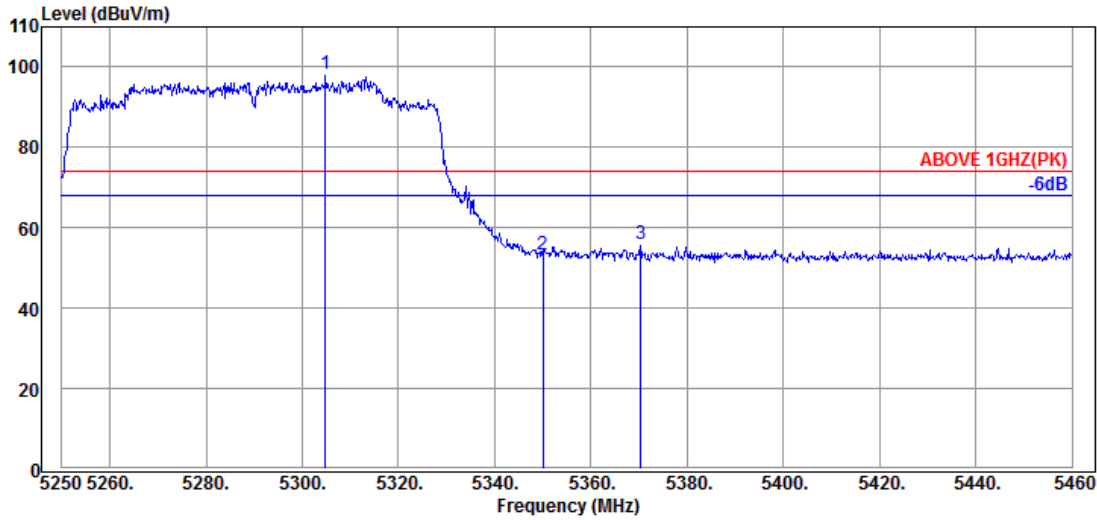

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.810	34.50	8.51	39.19	94.37	98.19	---	---	Peak
5349.960	34.60	8.56	39.19	49.34	53.31	74.00	20.69	Peak
5370.330	34.67	8.57	39.18	52.03	56.09	74.00	17.91	Peak

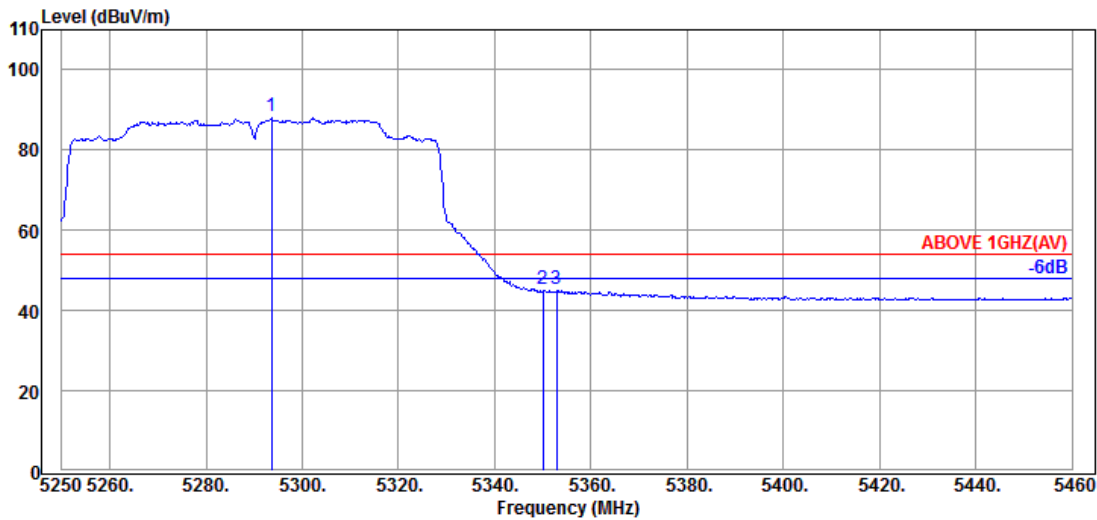


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.680	34.50	8.51	39.19	84.75	88.57	---	---	Average
5349.960	34.60	8.56	39.19	41.51	45.48	54.00	8.52	Average
5352.900	34.60	8.56	39.19	41.53	45.50	54.00	8.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

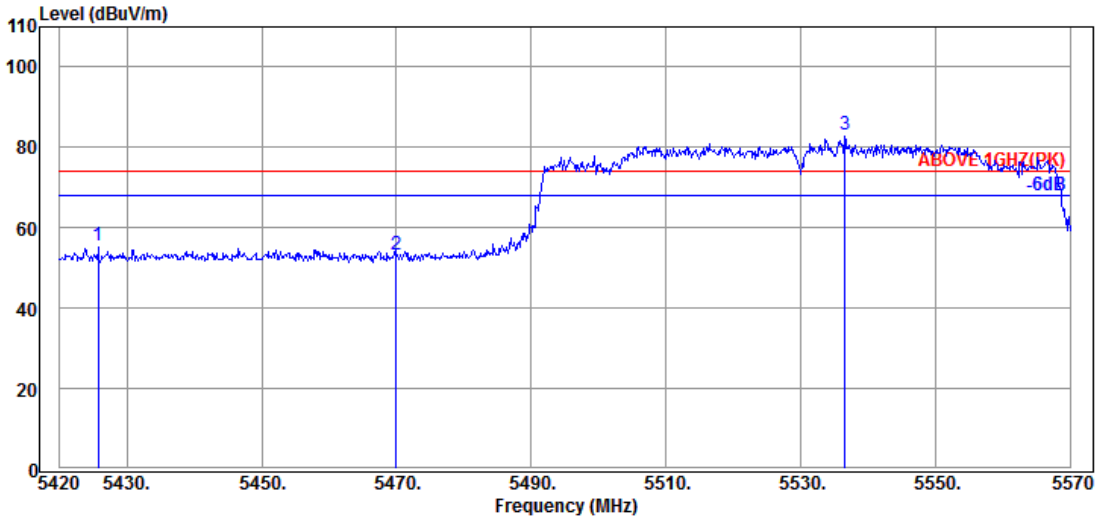

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.700	34.65	8.61	39.18	51.36	55.44	74.00	18.56	Peak
5469.950	34.57	8.65	39.17	49.30	53.35	74.00	20.65	Peak
@ 5536.550	34.57	8.71	39.18	78.88	82.98	---	---	Peak

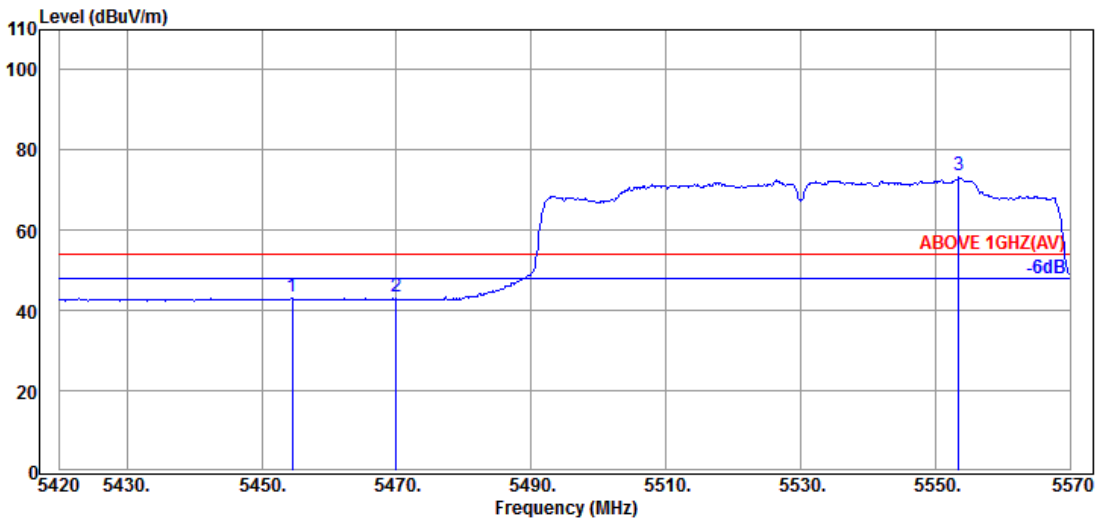


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.500	34.60	8.64	39.17	39.56	43.63	54.00	10.37	Average
5469.950	34.57	8.65	39.17	39.29	43.34	54.00	10.66	Average
@ 5553.500	34.60	8.72	39.18	69.75	73.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

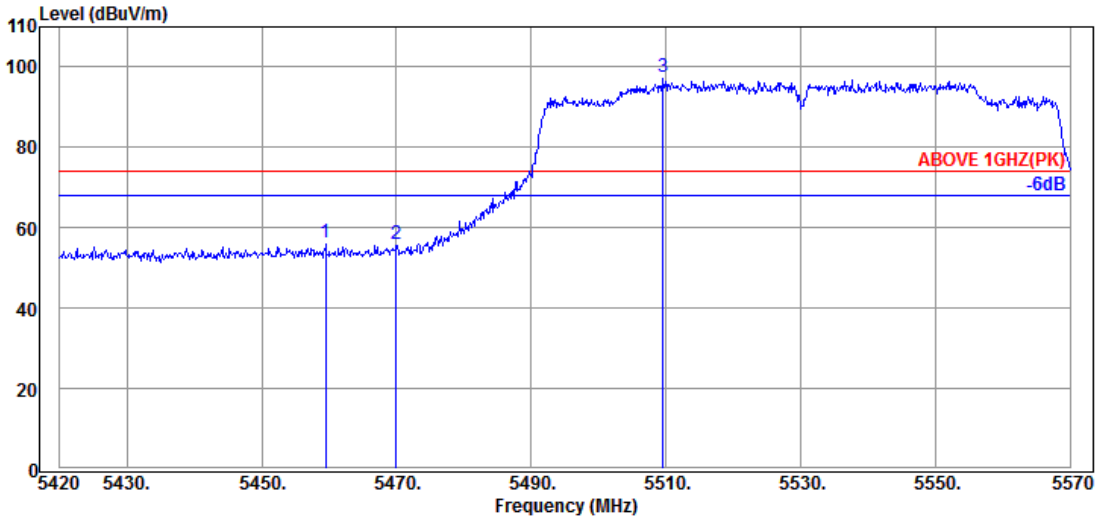

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.450	34.60	8.64	39.17	52.30	56.37	74.00	17.63	Peak
5469.950	34.57	8.65	39.17	51.75	55.80	74.00	18.20	Peak
@ 5509.550	34.50	8.68	39.17	93.39	97.40	---	---	Peak

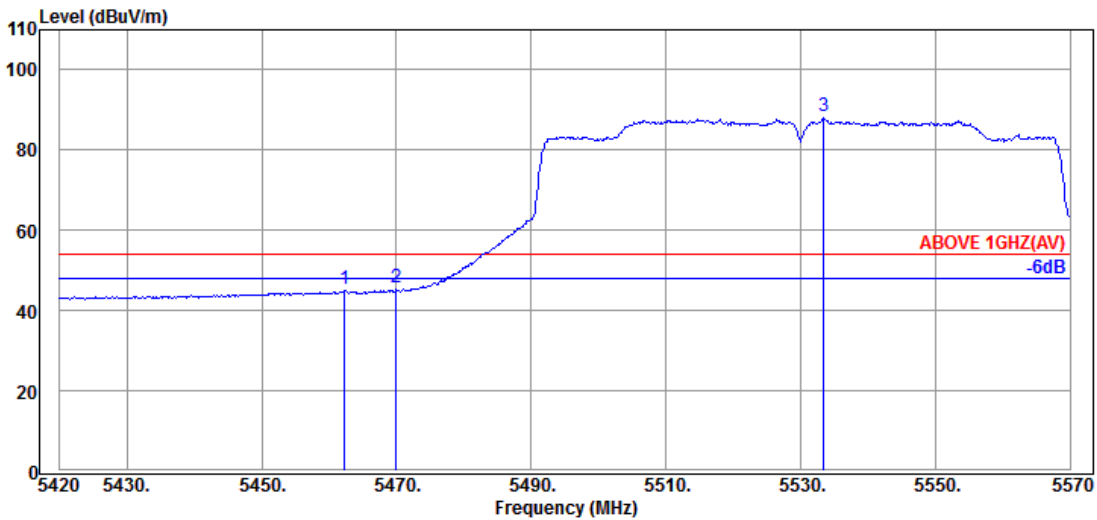


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.60	8.64	39.17	41.48	45.55	54.00	8.45	Average
5469.950	34.57	8.65	39.17	41.54	45.59	54.00	8.41	Average
@ 5533.400	34.57	8.71	39.18	84.33	88.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

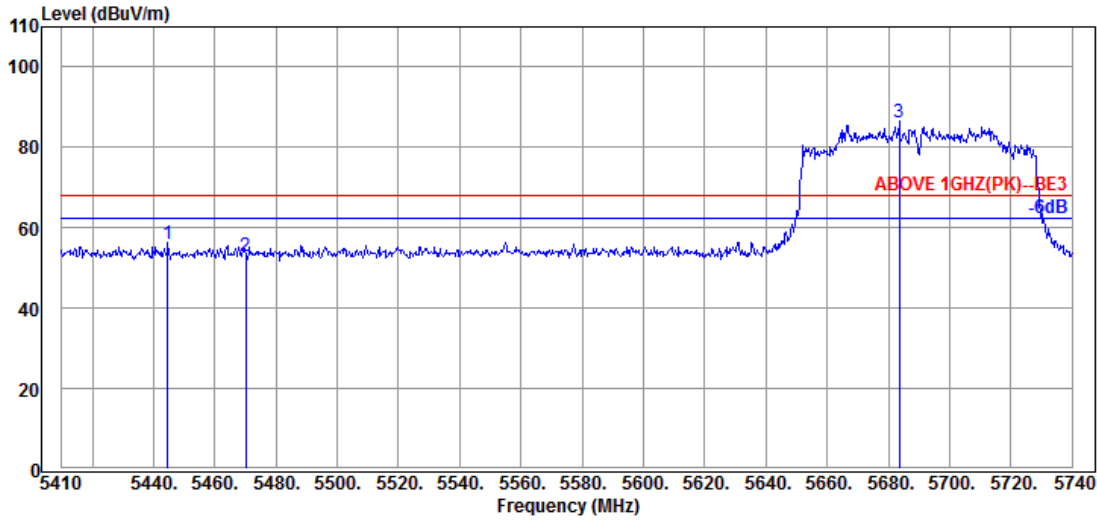

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.650	34.62	8.63	39.18	51.86	55.93	68.20	12.27	Peak
5470.060	34.57	8.65	39.17	48.89	52.94	68.20	15.26	Peak
@ 5683.570	34.53	8.84	39.22	82.12	86.27	---	---	Peak

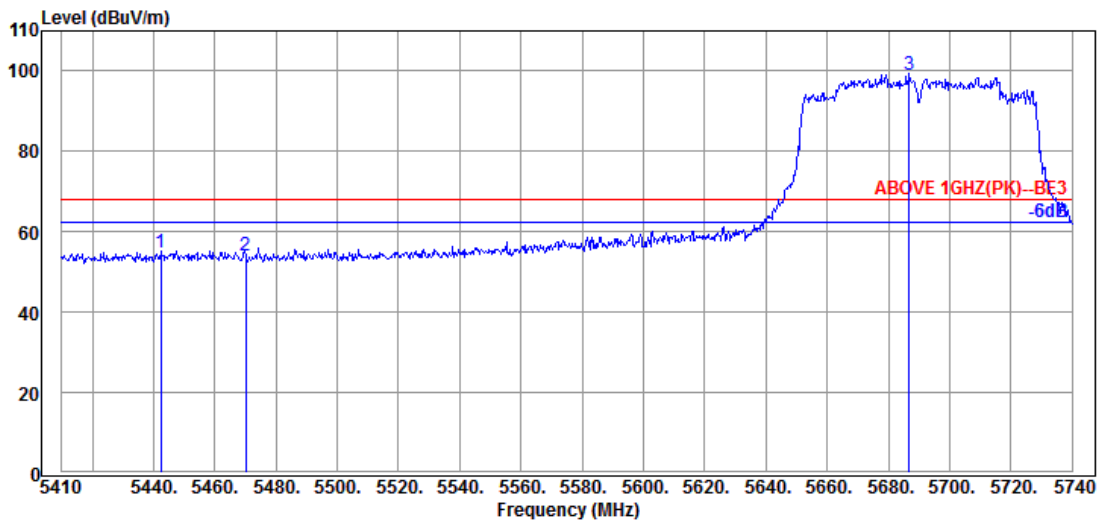


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.340	34.62	8.63	39.18	50.81	54.88	68.20	13.32	Peak
5470.060	34.57	8.65	39.17	49.88	53.93	68.20	14.27	Peak
@ 5686.870	34.53	8.84	39.22	94.97	99.12	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

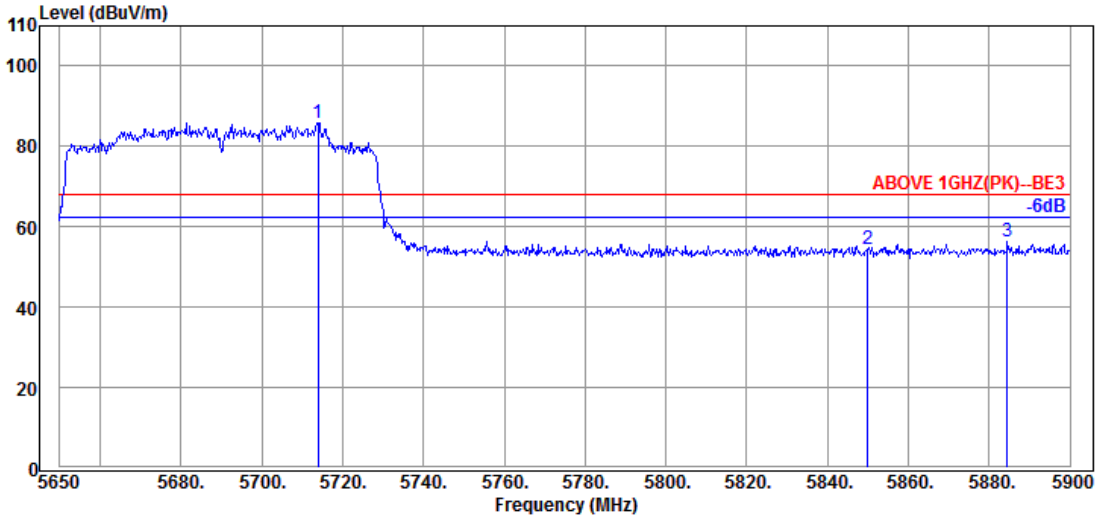

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.000	34.50	8.85	39.23	81.57	85.69	---	---	Peak
5850.000	34.40	8.96	39.26	50.24	54.34	68.20	13.86	Peak
5884.500	34.47	8.99	39.27	52.12	56.31	68.20	11.89	Peak

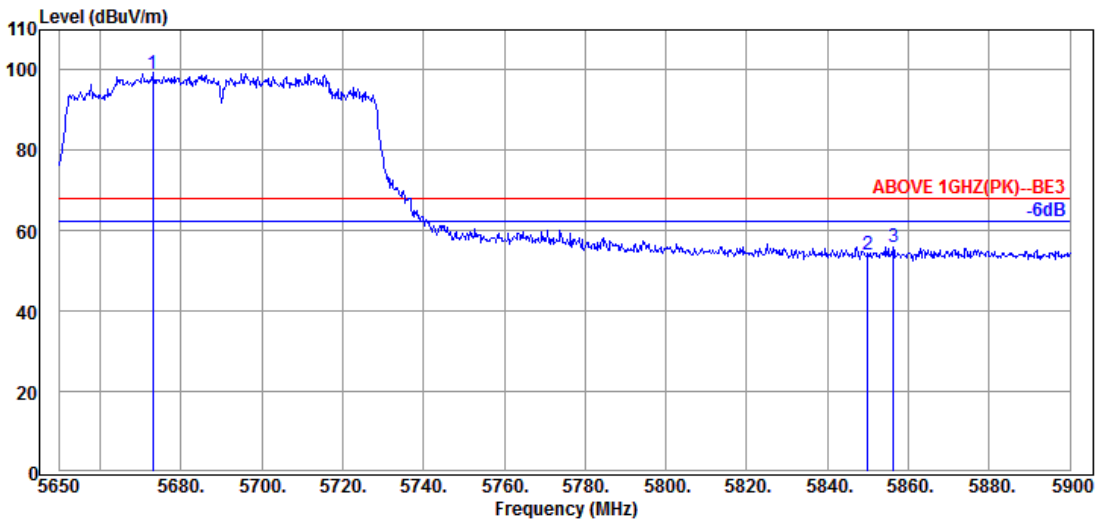


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.000	34.53	8.82	39.22	94.86	98.99	---	---	Peak
5850.000	34.40	8.96	39.26	50.01	54.11	68.20	14.09	Peak
5856.250	34.43	8.98	39.26	51.73	55.88	68.20	12.32	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

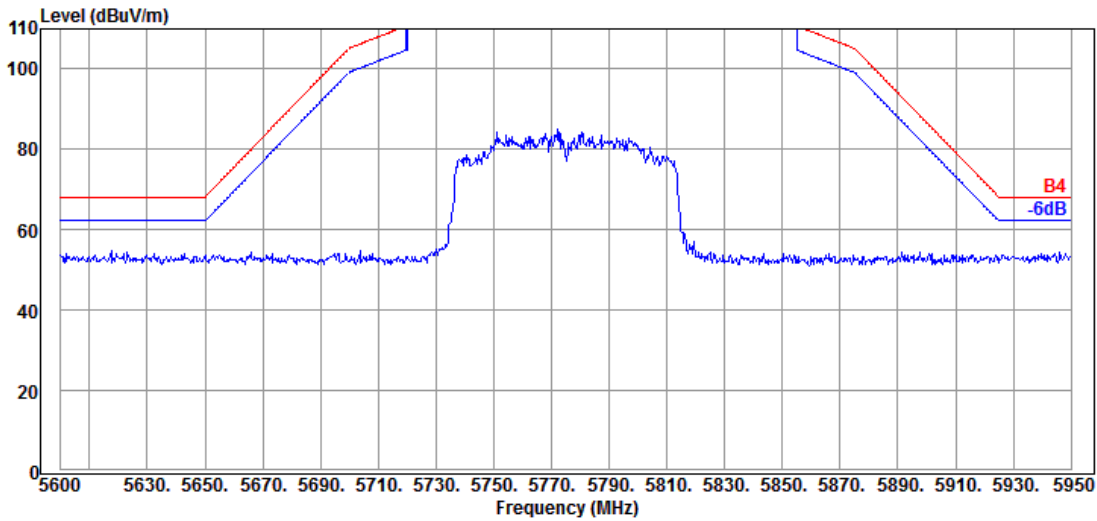

Antenna at Vertical Polarization

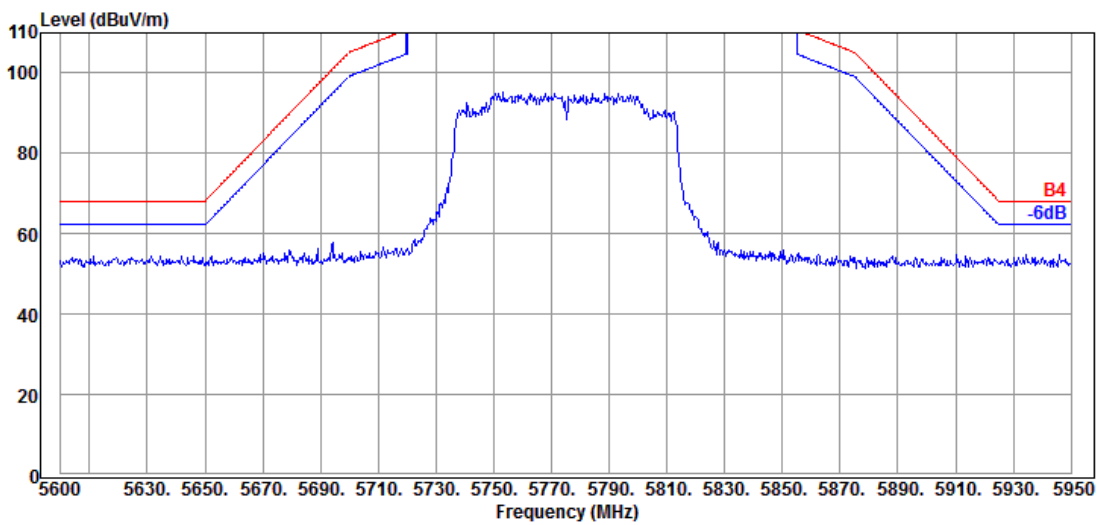


Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

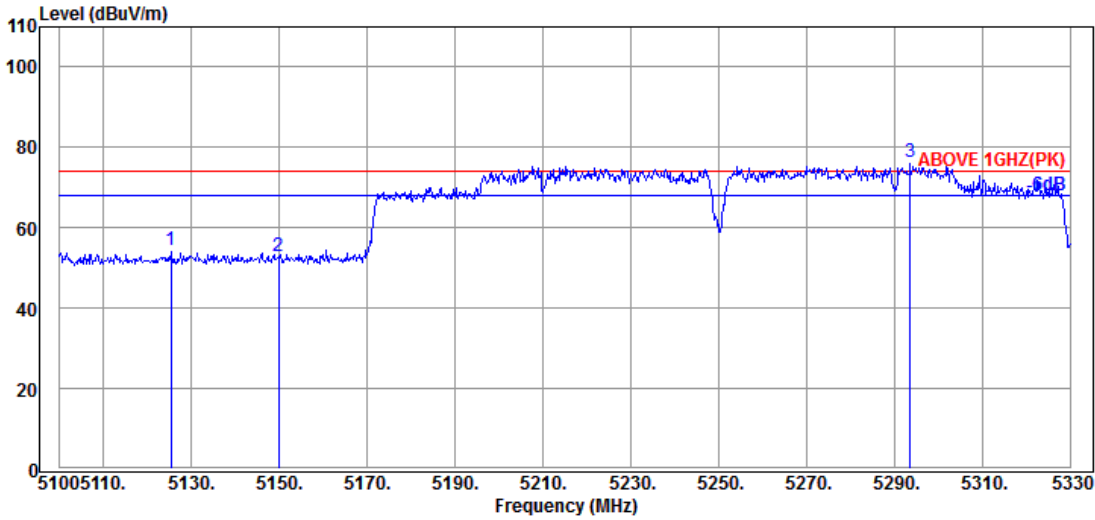

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.300	33.97	8.37	39.21	51.34	54.47	74.00	19.53	Peak
5149.910	34.10	8.39	39.21	49.81	53.09	74.00	20.91	Peak
@ 5293.660	34.50	8.51	39.19	72.39	76.21	---	---	Peak

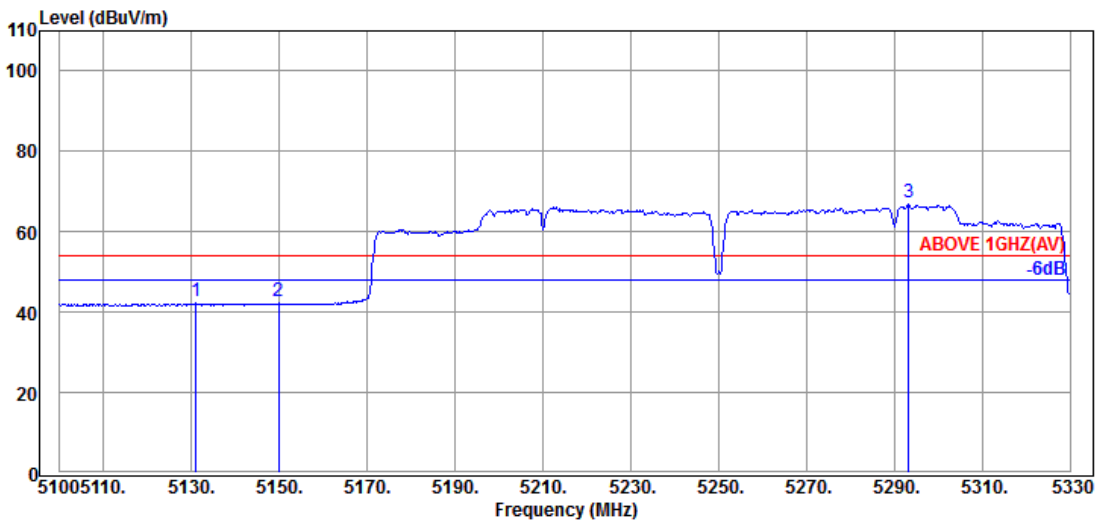


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.050	34.03	8.37	39.21	39.41	42.60	54.00	11.40	Average
5149.910	34.10	8.39	39.21	39.31	42.59	54.00	11.41	Average
@ 5293.200	34.50	8.51	39.19	63.39	67.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

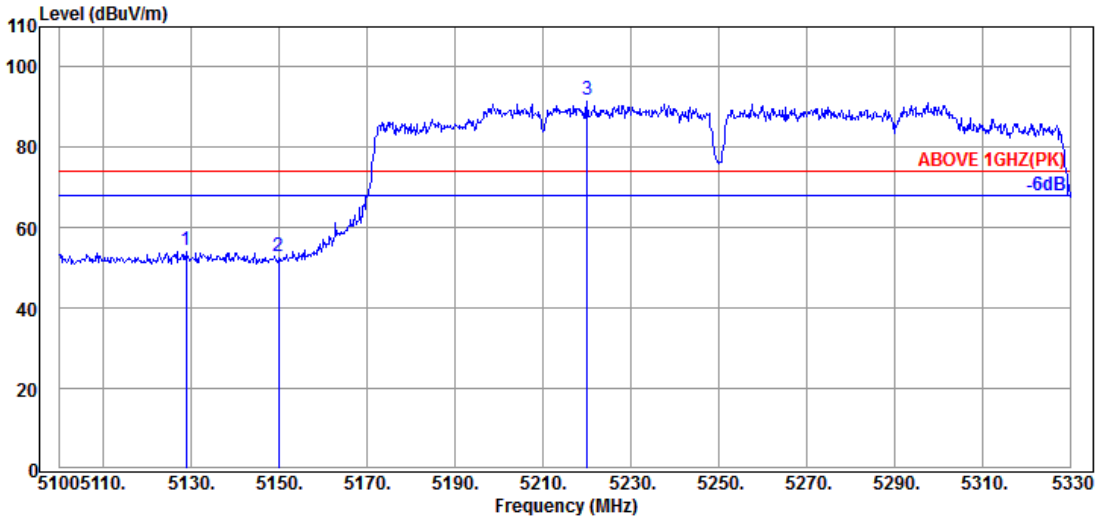

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.750	34.03	8.37	39.21	51.29	54.48	74.00	19.52	Peak
5149.910	34.10	8.39	39.21	49.82	53.10	74.00	20.90	Peak
@ 5220.060	34.40	8.44	39.20	88.22	91.86	---	---	Peak

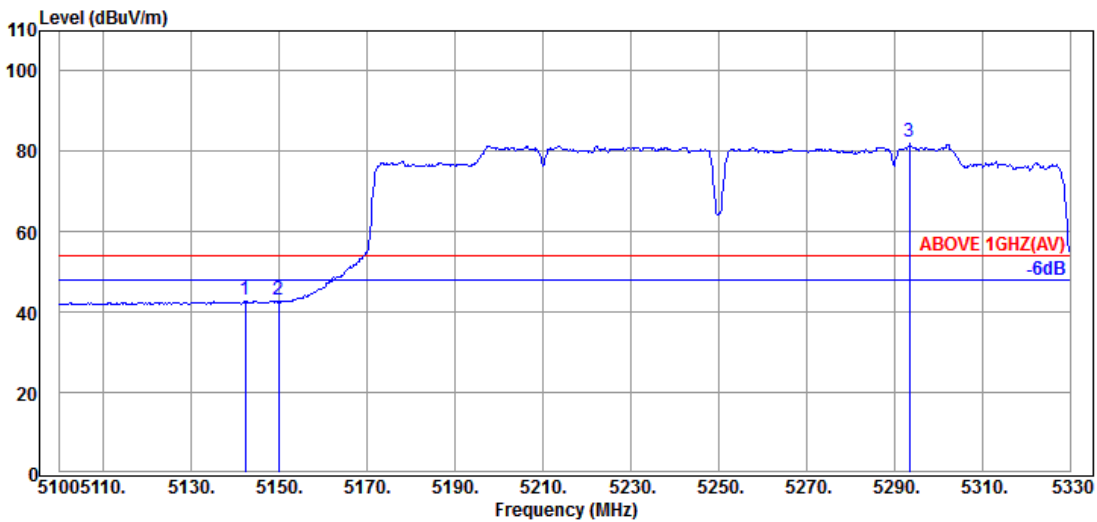


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.320	34.10	8.39	39.21	39.90	43.18	54.00	10.82	Average
5149.910	34.10	8.39	39.21	39.74	43.02	54.00	10.98	Average
@ 5293.430	34.50	8.51	39.19	78.41	82.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

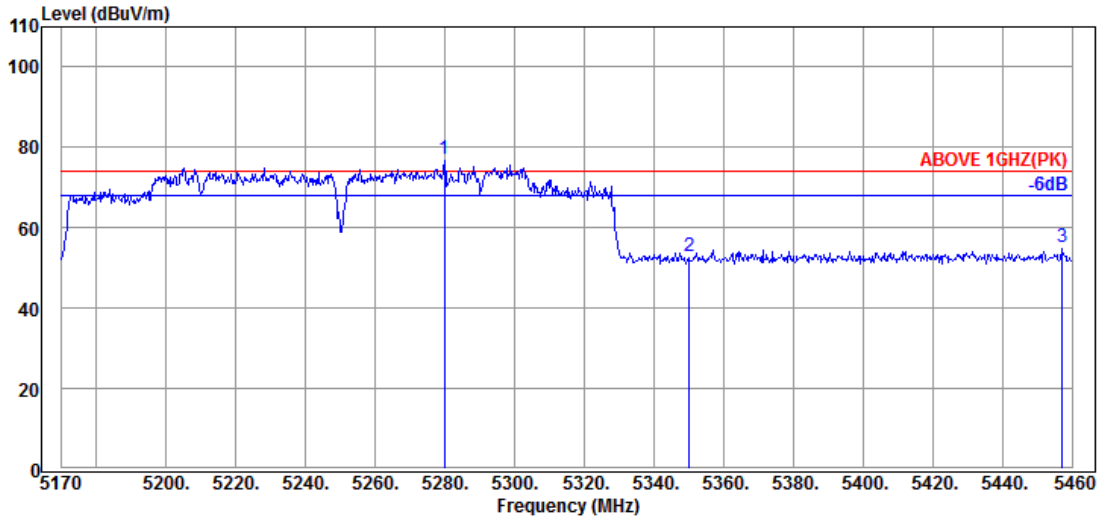

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.910	34.50	8.50	39.19	73.41	77.22	---	---	Peak
5350.090	34.60	8.56	39.19	48.82	52.79	74.00	21.21	Peak
5457.100	34.60	8.64	39.17	51.03	55.10	74.00	18.90	Peak

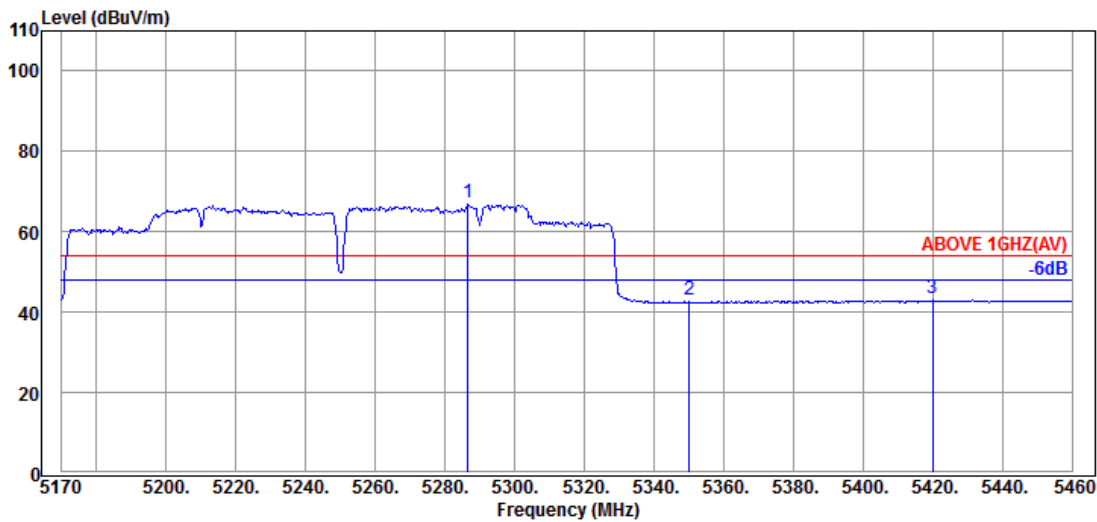


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.580	34.50	8.50	39.19	63.47	67.28	---	---	Average
5350.090	34.60	8.56	39.19	38.95	42.92	54.00	11.08	Average
5419.980	34.65	8.61	39.18	39.57	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

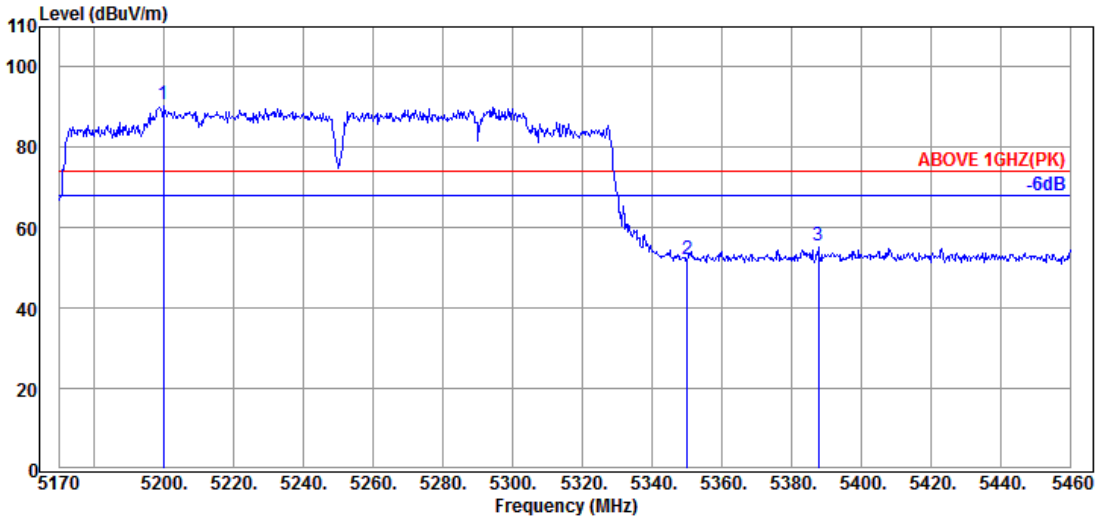

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5199.870	34.30	8.43	39.21	87.21	90.73	---	---	Peak
5350.090	34.60	8.56	39.19	48.31	52.28	74.00	21.72	Peak
5387.790	34.70	8.58	39.18	51.42	55.52	74.00	18.48	Peak

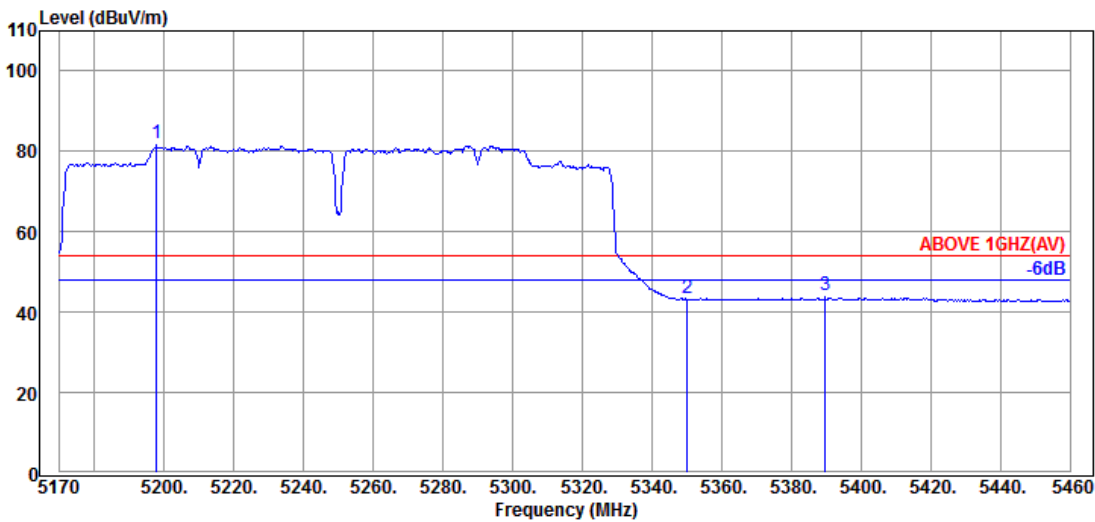


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.840	34.30	8.43	39.21	78.45	81.97	---	---	Average
5350.090	34.60	8.56	39.19	39.69	43.66	54.00	10.34	Average
5389.820	34.70	8.58	39.18	40.18	44.28	54.00	9.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

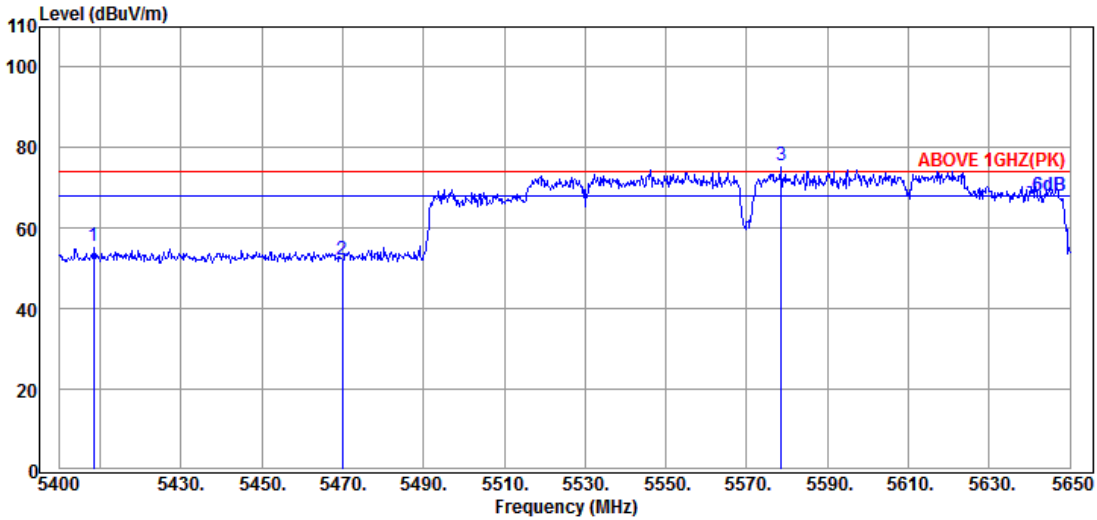

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5408.500	34.67	8.60	39.18	51.61	55.70	74.00	18.30	Peak
5470.000	34.57	8.65	39.17	48.09	52.14	74.00	21.86	Peak
@ 5578.500	34.60	8.74	39.19	71.33	75.48	---	---	Peak

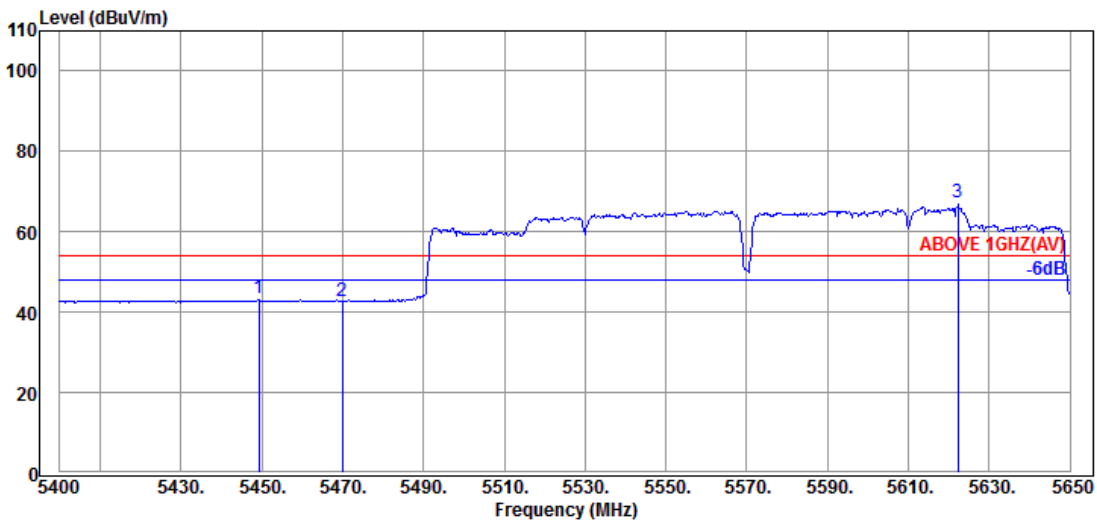


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.250	34.60	8.64	39.18	39.57	43.63	54.00	10.37	Average
5470.000	34.57	8.65	39.17	38.67	42.72	54.00	11.28	Average
@ 5622.250	34.60	8.78	39.20	62.96	67.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

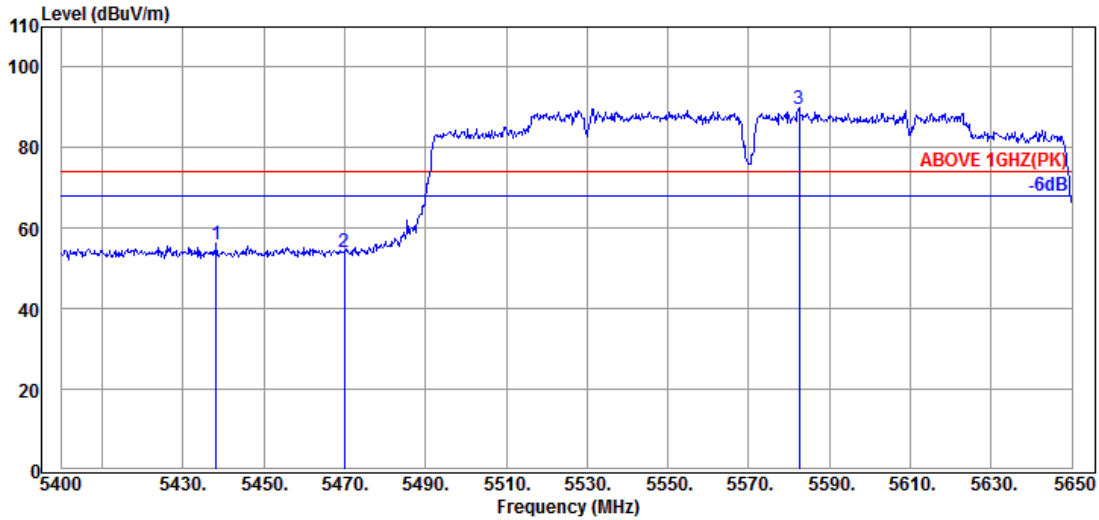

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.250	34.62	8.63	39.18	51.83	55.90	74.00	18.10	Peak
5470.000	34.57	8.65	39.17	49.93	53.98	74.00	20.02	Peak
@ 5582.500	34.60	8.75	39.19	85.52	89.68	---	---	Peak

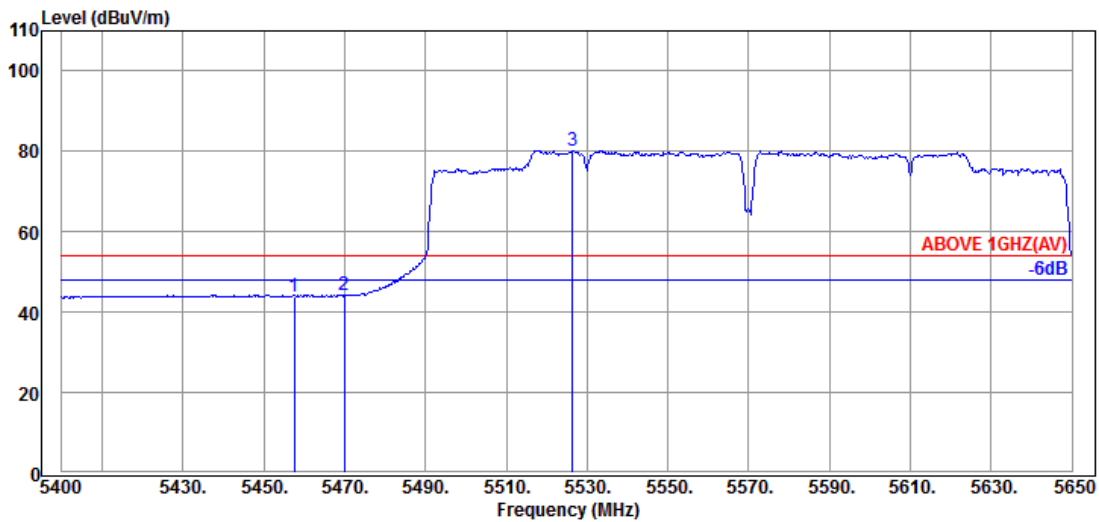


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.60	8.64	39.17	39.86	43.93	54.00	10.07	Average
5470.000	34.57	8.65	39.17	40.01	44.06	54.00	9.94	Average
@ 5526.500	34.53	8.70	39.18	75.95	80.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-2C
		Frequency	TX 5570MHz

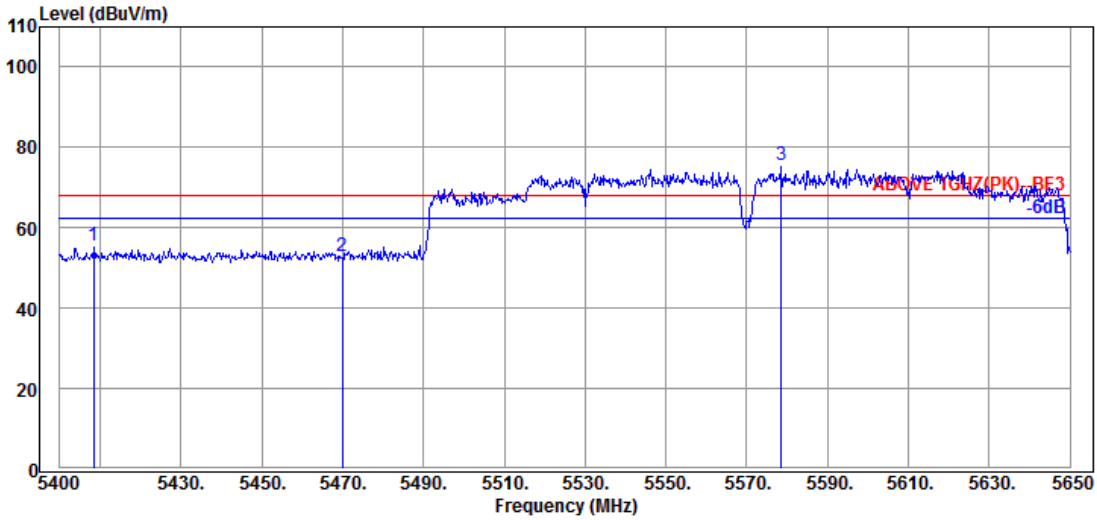

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5408.500	34.67	8.60	39.18	51.61	55.70	68.20	12.50	Peak
5470.000	34.57	8.65	39.17	48.75	52.80	68.20	15.40	Peak
@ 5578.500	34.60	8.74	39.19	71.33	75.48	---	---	Peak

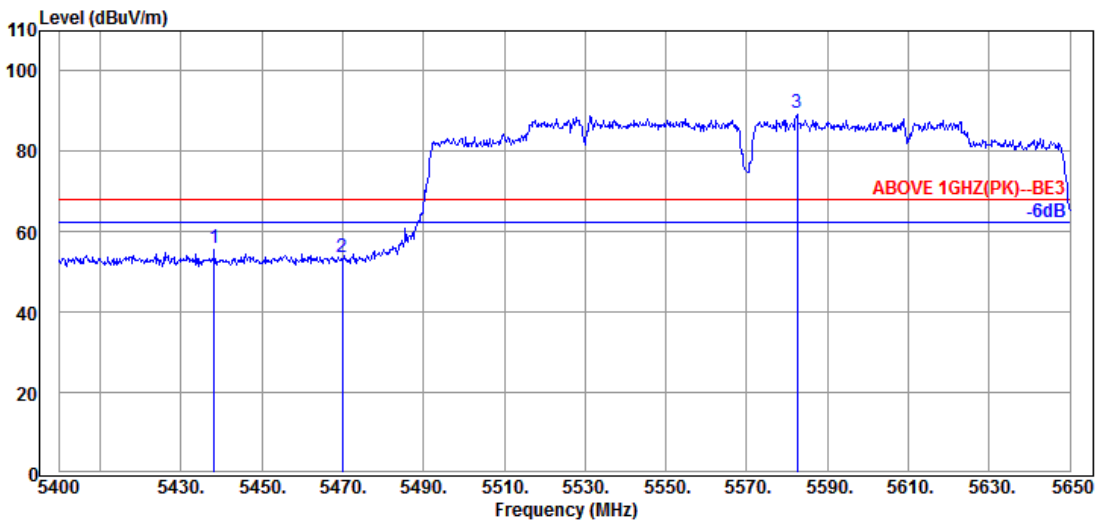


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.250	34.62	8.63	39.18	51.83	55.90	68.20	12.30	Peak
5470.000	34.57	8.65	39.17	49.60	53.65	68.20	14.55	Peak
@ 5582.500	34.60	8.75	39.19	85.52	89.68	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

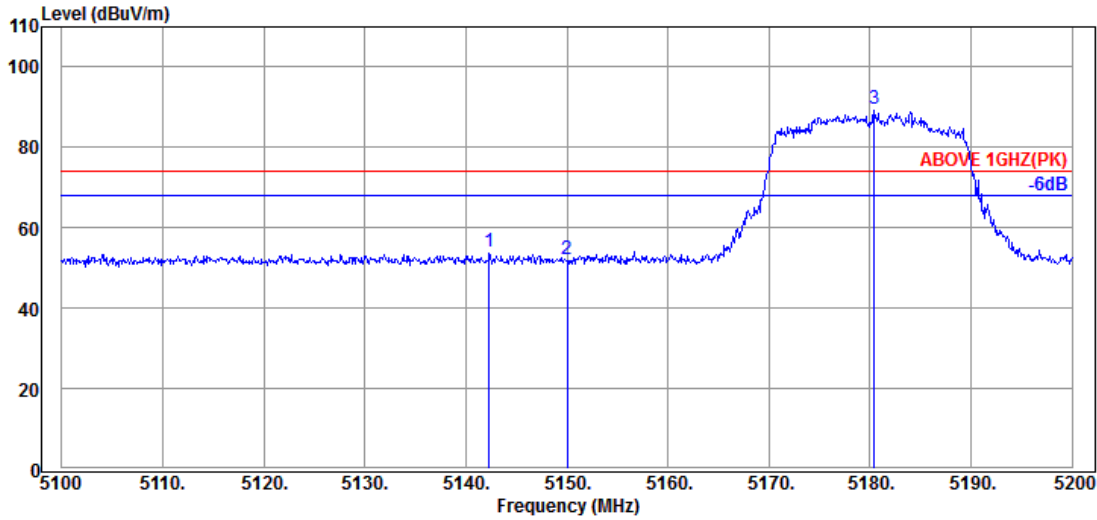

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	34.10	8.39	39.21	50.82	54.10	74.00	19.90	Peak
5150.000	34.10	8.39	39.21	49.00	52.28	74.00	21.72	Peak
@ 5180.400	34.23	8.41	39.21	86.22	89.65	---	---	Peak

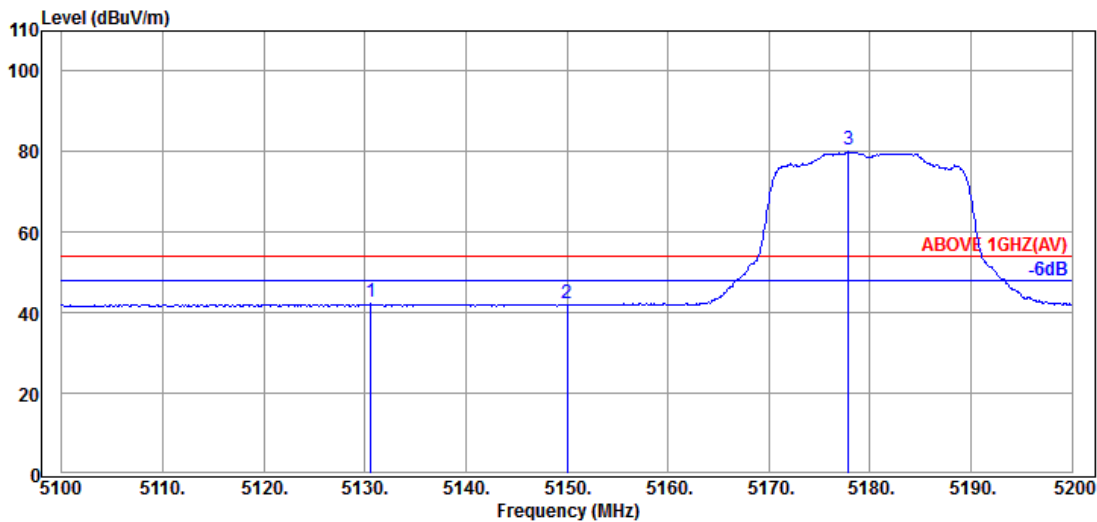


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.600	34.03	8.37	39.21	39.44	42.63	54.00	11.37	Average
5150.000	34.10	8.39	39.21	39.06	42.34	54.00	11.66	Average
@ 5177.900	34.23	8.41	39.21	77.05	80.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

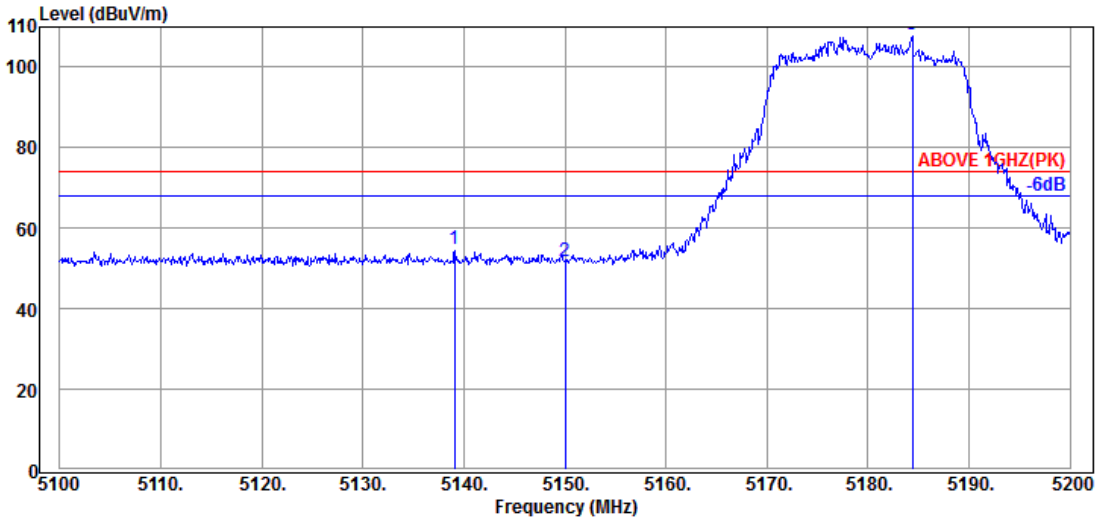

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.100	34.03	8.37	39.21	51.50	54.69	74.00	19.31	Peak
5150.000	34.10	8.39	39.21	48.67	51.95	74.00	22.05	Peak
@ 5184.400	34.23	8.41	39.21	104.64	108.07	---	---	Peak

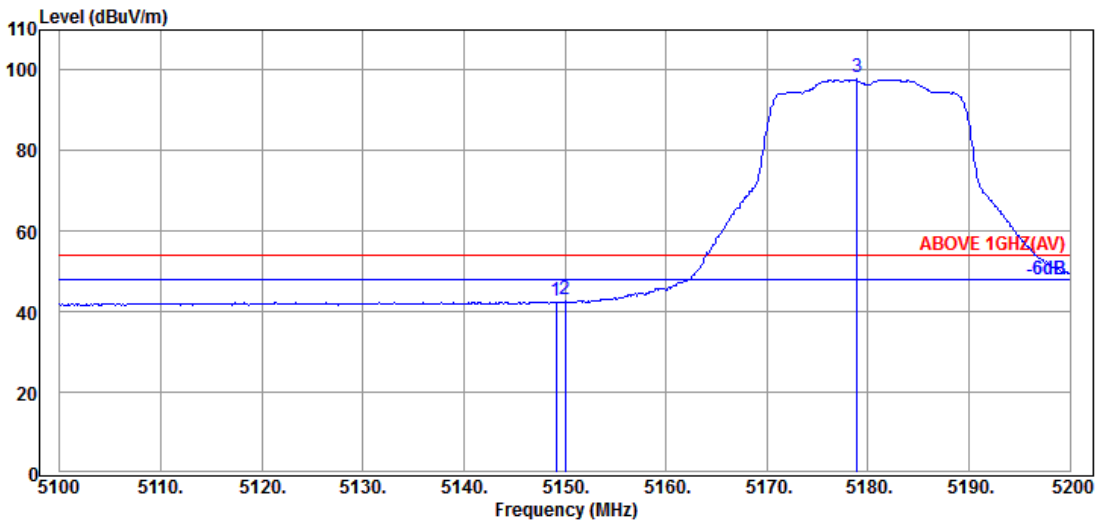


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.10	8.39	39.21	39.61	42.89	54.00	11.11	Average
5150.000	34.10	8.39	39.21	39.63	42.91	54.00	11.09	Average
@ 5178.900	34.23	8.41	39.21	94.80	98.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

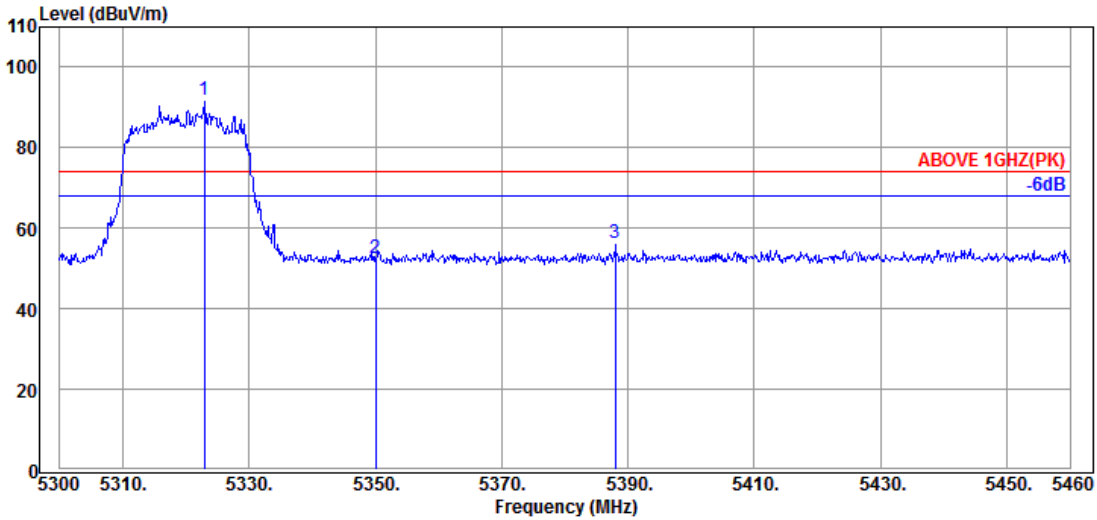

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.880	34.53	8.53	39.19	87.81	91.68	---	---	Peak
5350.080	34.60	8.56	39.19	48.43	52.40	74.00	21.60	Peak
5388.000	34.70	8.58	39.18	52.21	56.31	74.00	17.69	Peak

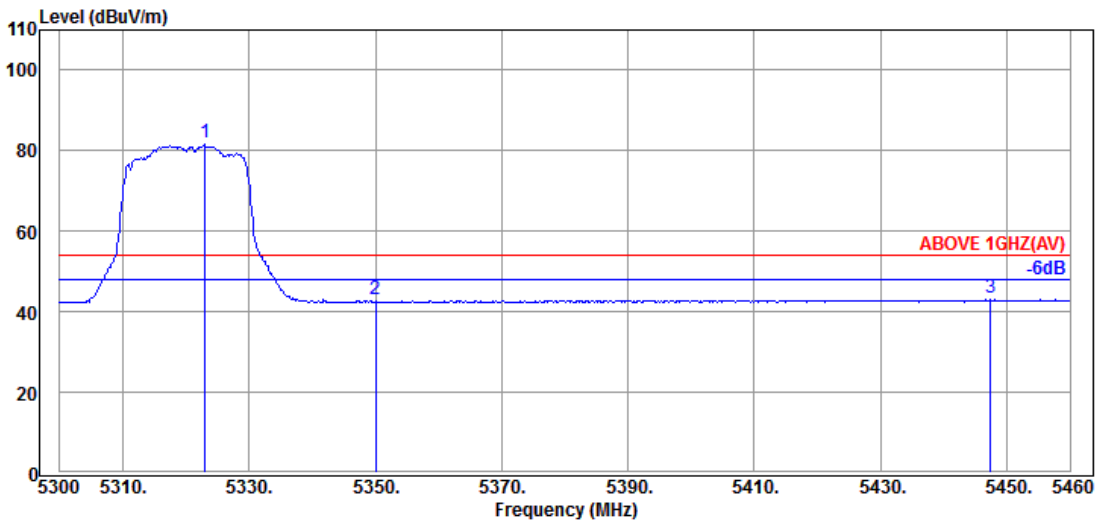


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.040	34.53	8.53	39.19	77.99	81.86	---	---	Average
5350.080	34.60	8.56	39.19	39.02	42.99	54.00	11.01	Average
5447.360	34.62	8.64	39.18	39.57	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

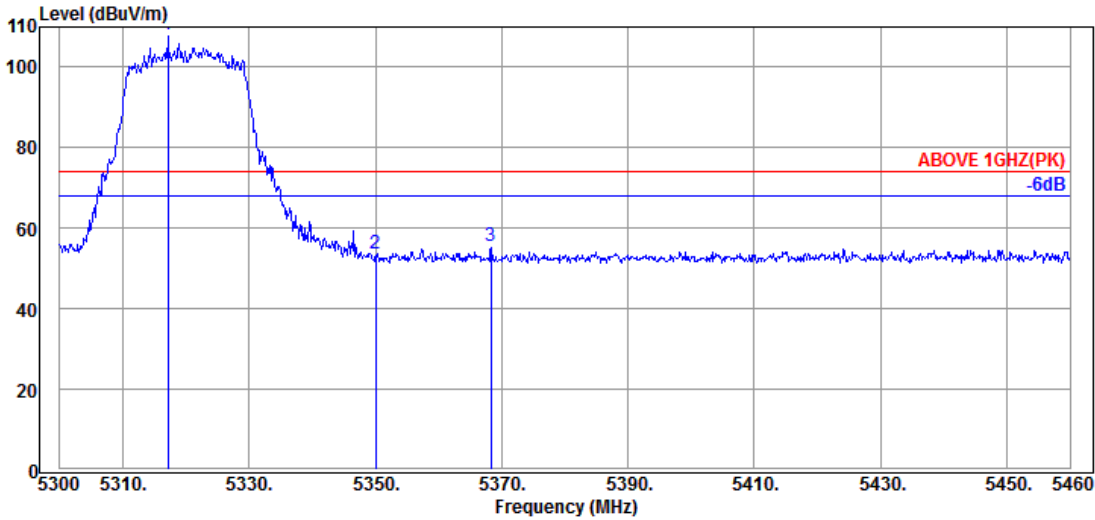

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.53	8.53	39.19	104.09	107.96	---	---	Peak
5350.080	34.60	8.56	39.19	49.68	53.65	74.00	20.35	Peak
5368.320	34.63	8.57	39.18	51.42	55.44	74.00	18.56	Peak

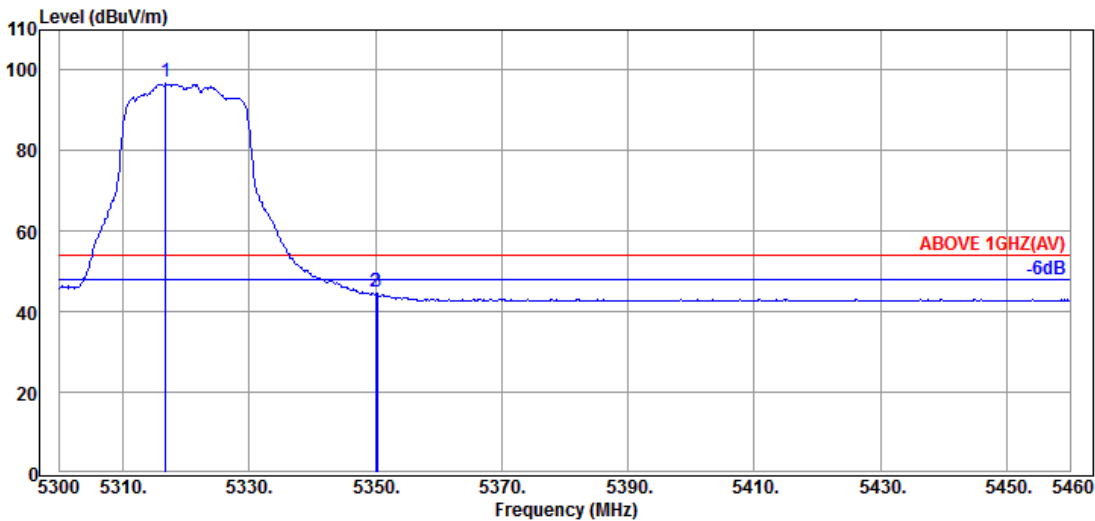


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.53	8.53	39.19	93.29	97.16	---	---	Average
5350.080	34.60	8.56	39.19	40.91	44.88	54.00	9.12	Average
5350.240	34.60	8.56	39.19	40.94	44.91	54.00	9.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

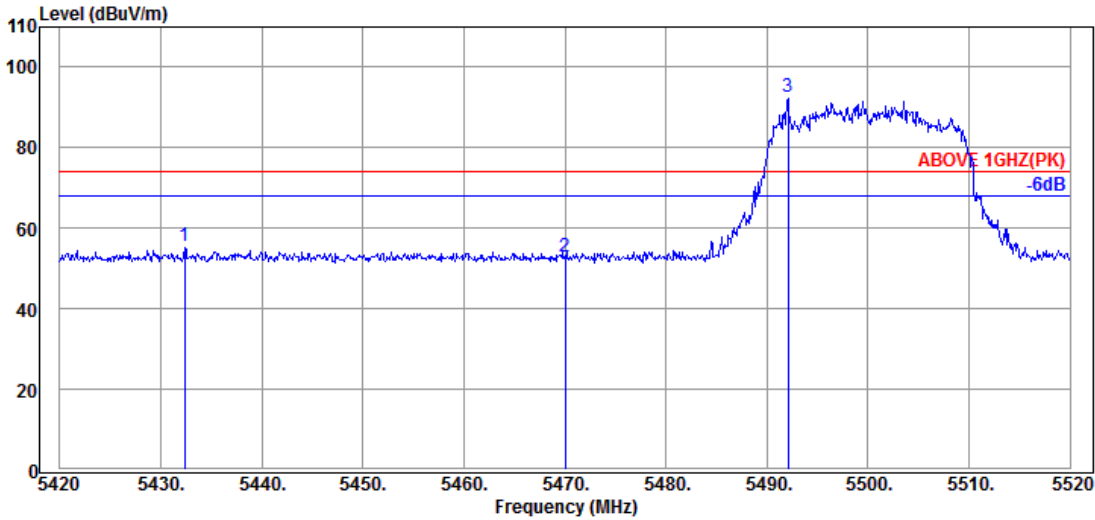

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.400	34.62	8.63	39.18	51.50	55.57	74.00	18.43	Peak
5470.000	34.57	8.65	39.17	48.91	52.96	74.00	21.04	Peak
@ 5492.100	34.53	8.67	39.17	88.67	92.70	---	---	Peak

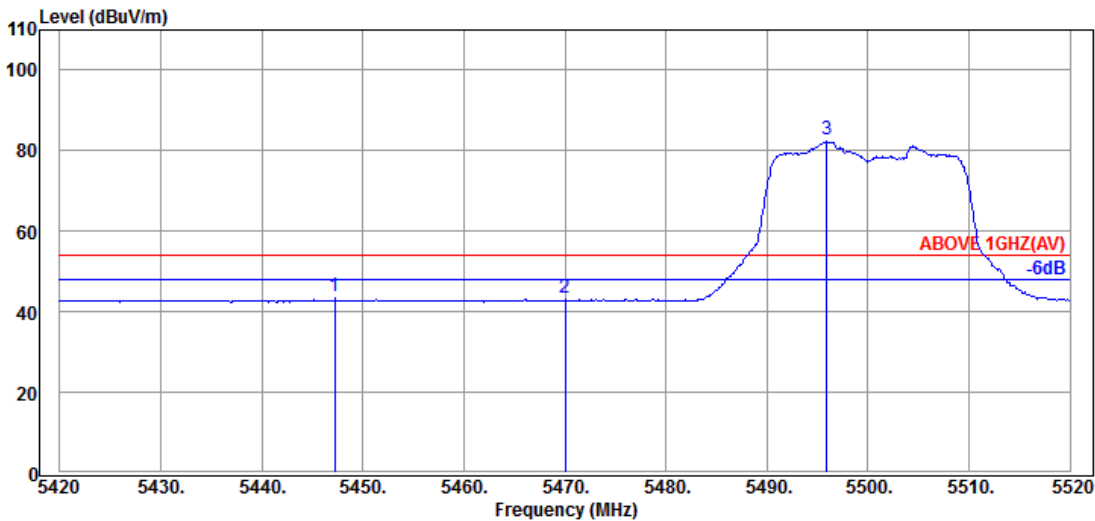


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.200	34.62	8.64	39.18	39.58	43.66	54.00	10.34	Average
5470.000	34.57	8.65	39.17	39.28	43.33	54.00	10.67	Average
@ 5495.900	34.50	8.67	39.17	78.82	82.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

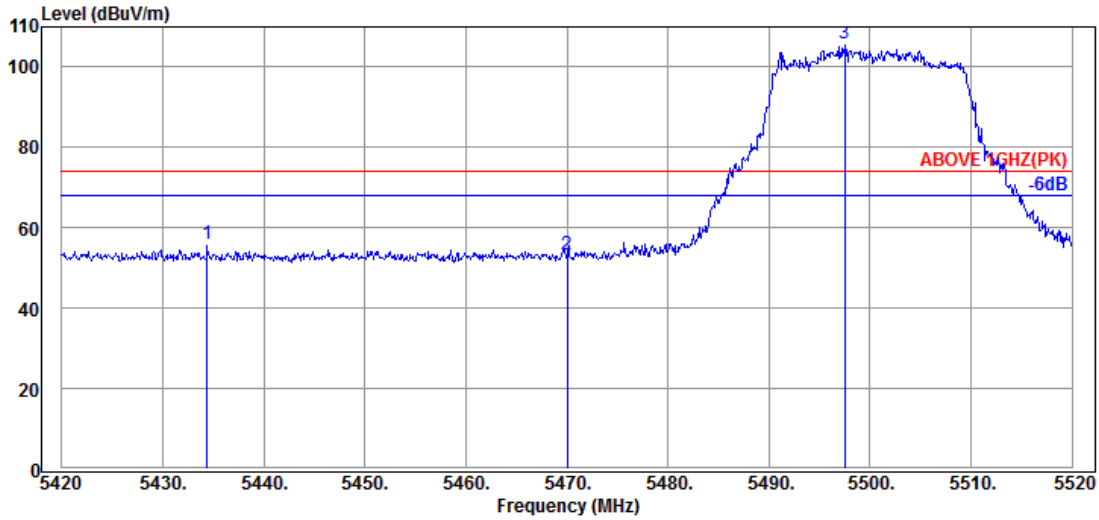

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.400	34.62	8.63	39.18	51.81	55.88	74.00	18.12	Peak
5470.000	34.57	8.65	39.17	49.34	53.39	74.00	20.61	Peak
@ 5497.500	34.50	8.68	39.17	101.78	105.79	---	---	Peak

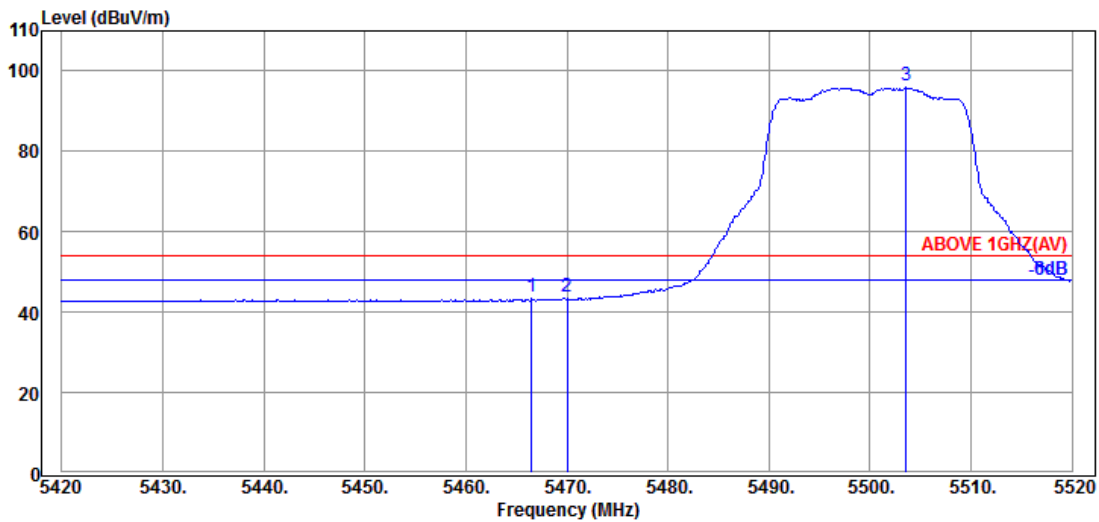


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.57	8.65	39.17	39.95	44.00	54.00	10.00	Average
5470.000	34.57	8.65	39.17	39.92	43.97	54.00	10.03	Average
@ 5503.600	34.50	8.68	39.17	92.52	96.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5700MHz

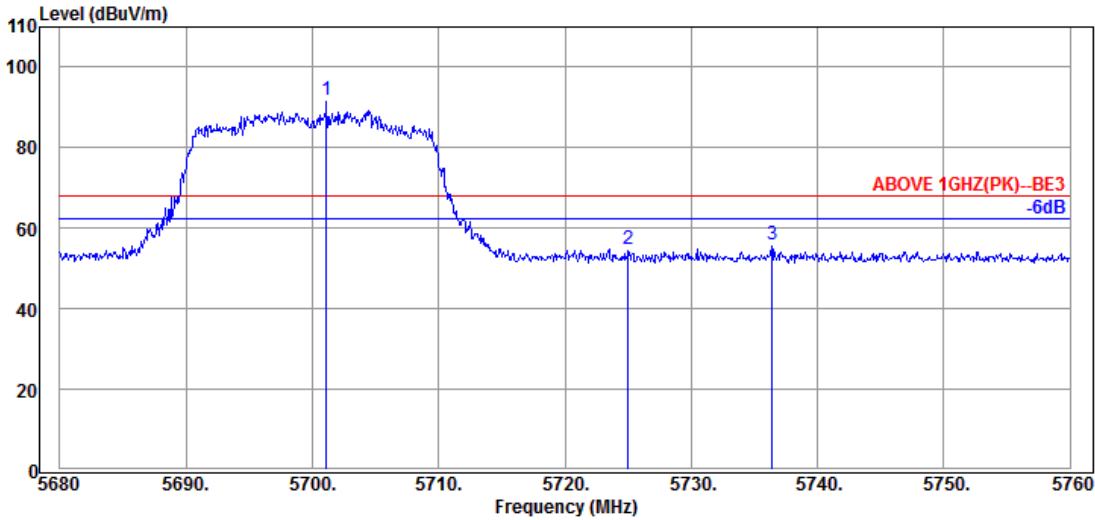

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.120	34.50	8.85	39.22	87.76	91.89	---	---	Peak
5725.040	34.50	8.86	39.23	50.79	54.92	68.20	13.28	Peak
5736.400	34.50	8.88	39.23	51.68	55.83	68.20	12.37	Peak

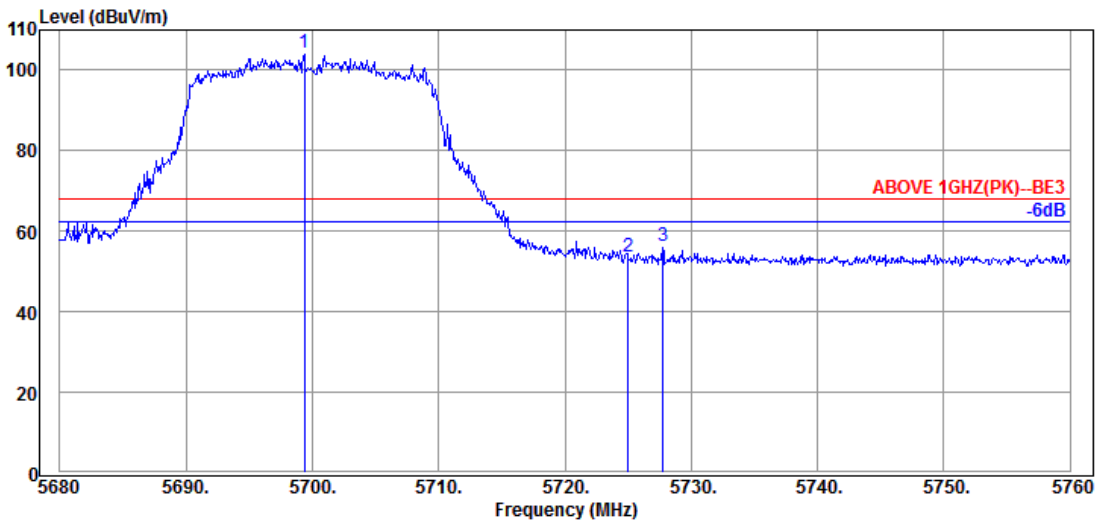


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.360	34.50	8.84	39.22	100.28	104.40	---	---	Peak
5725.040	34.50	8.86	39.23	49.61	53.74	68.20	14.46	Peak
5727.760	34.50	8.86	39.23	52.35	56.48	68.20	11.72	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

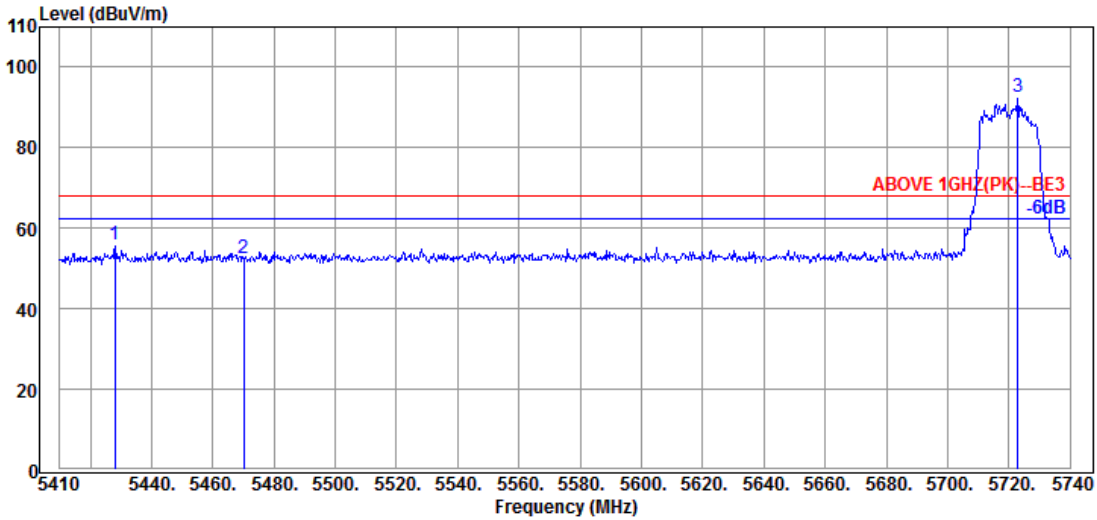

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.150	34.65	8.61	39.18	51.70	55.78	68.20	12.42	Peak
5470.060	34.57	8.65	39.17	48.56	52.61	68.20	15.59	Peak
@ 5722.840	34.50	8.86	39.23	88.62	92.75	---	---	Peak

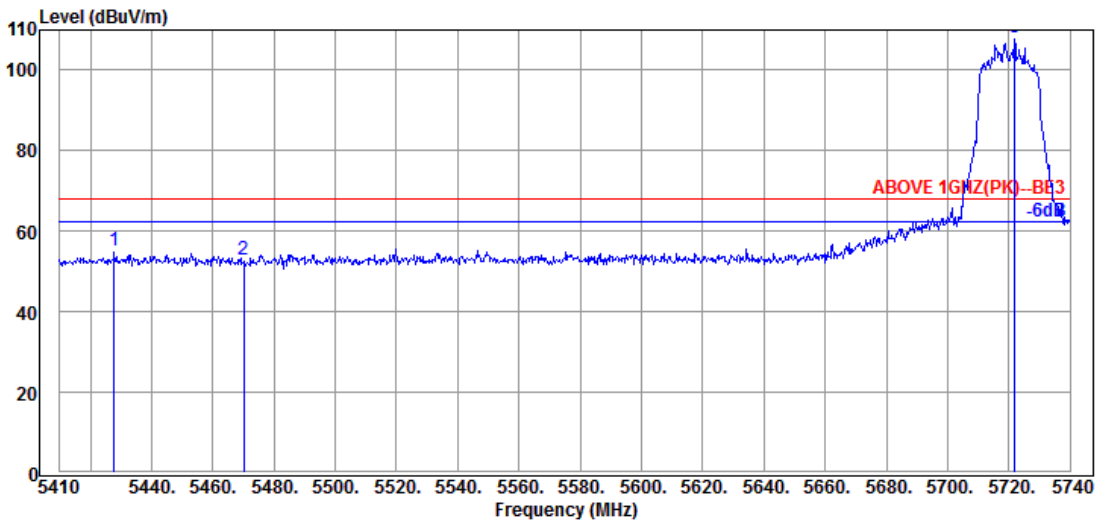


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.820	34.65	8.61	39.18	51.08	55.16	68.20	13.04	Peak
5470.060	34.57	8.65	39.17	48.93	52.98	68.20	15.22	Peak
@ 5721.850	34.50	8.86	39.23	103.88	108.01	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

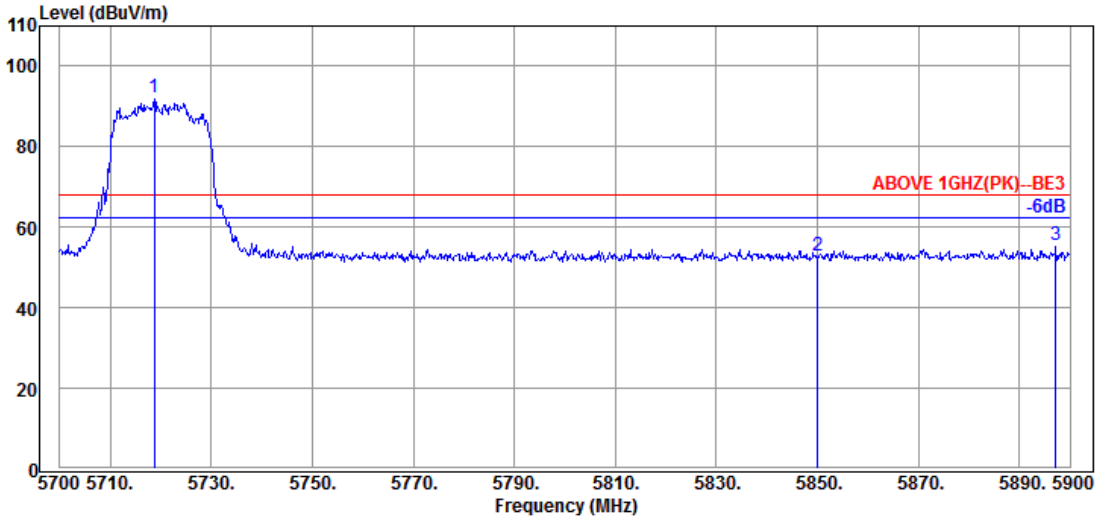

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.800	34.50	8.86	39.23	87.95	92.08	---	---	Peak
5850.000	34.40	8.96	39.26	48.93	53.03	68.20	15.17	Peak
5897.200	34.50	9.01	39.27	51.22	55.46	68.20	12.74	Peak

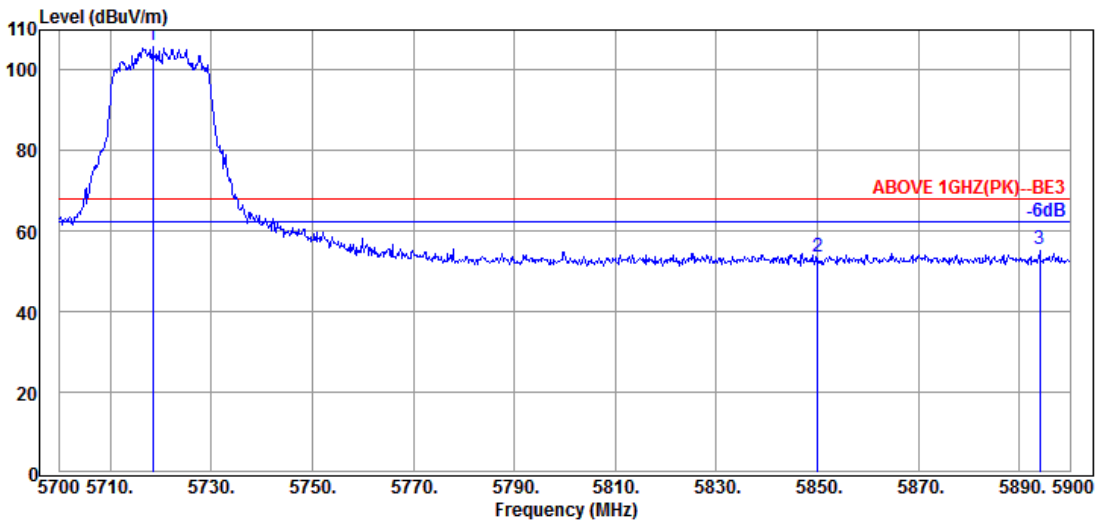


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.400	34.50	8.86	39.23	101.99	106.12	---	---	Peak
5850.000	34.40	8.96	39.26	49.62	53.72	68.20	14.48	Peak
5894.000	34.50	9.01	39.27	51.33	55.57	68.20	12.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

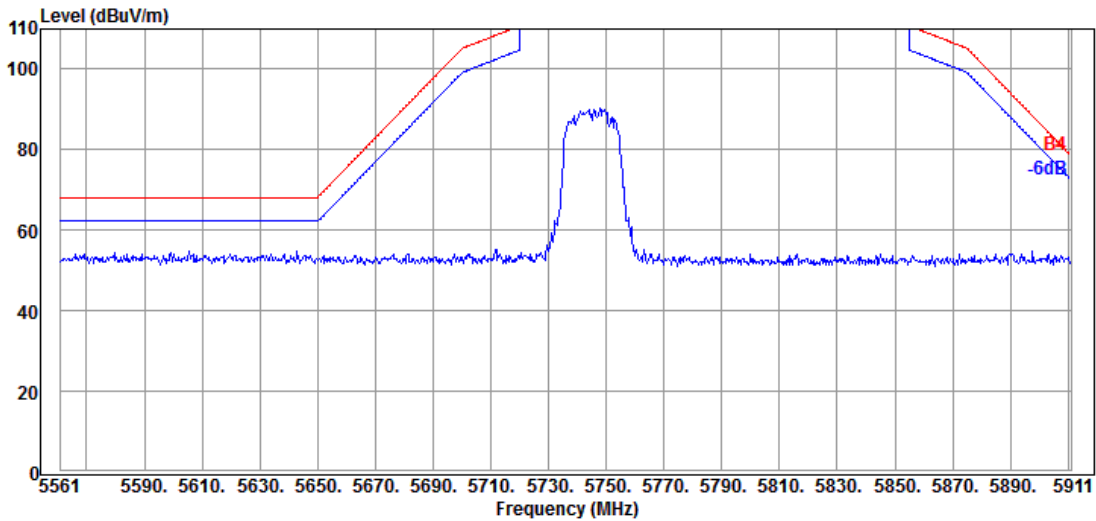


Antenna at Vertical Polarization

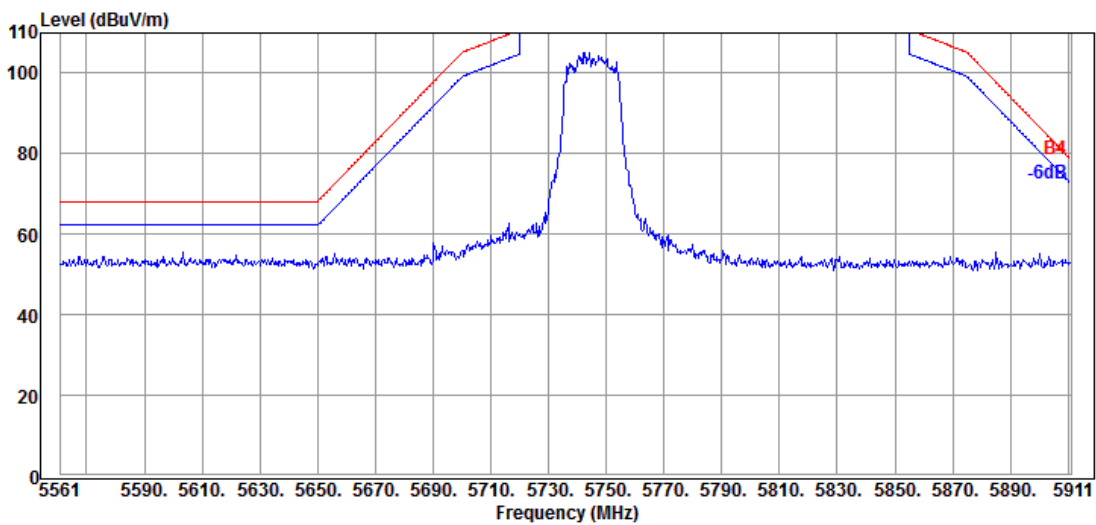


Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

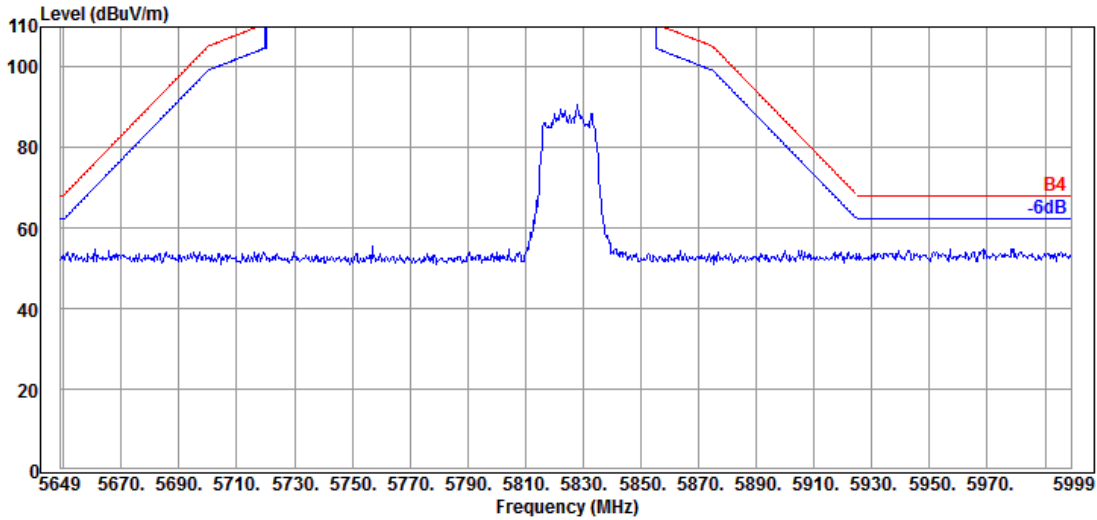

Antenna at Vertical Polarization

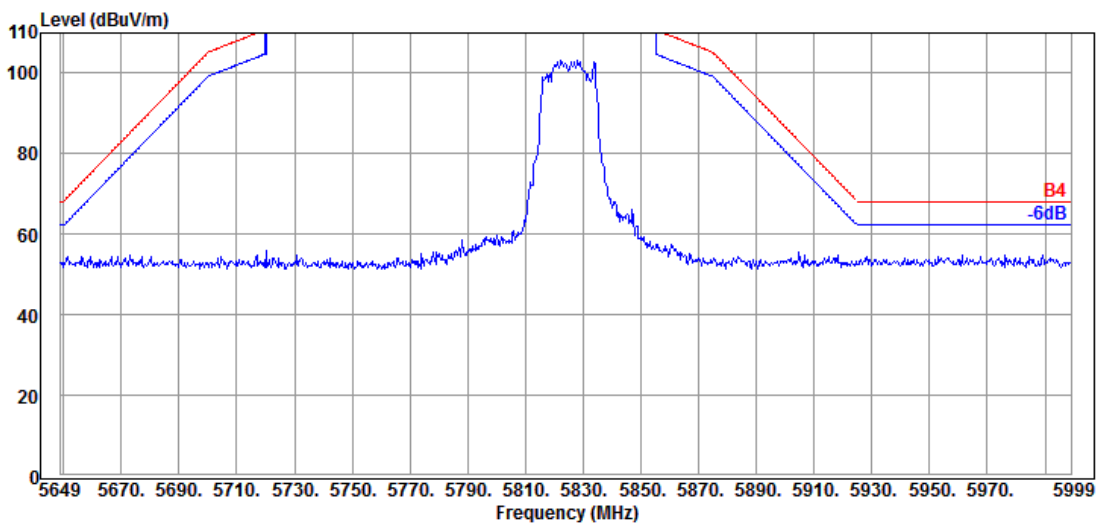


Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

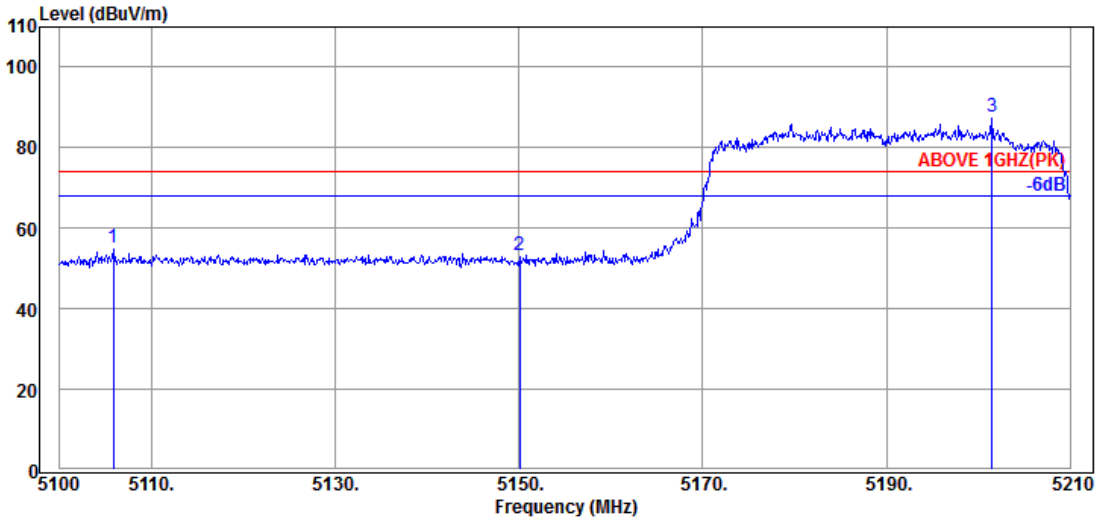

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5105.830	33.90	8.36	39.22	52.01	55.05	74.00	18.95	Peak
5150.050	34.10	8.39	39.21	50.15	53.43	74.00	20.57	Peak
@ 5201.530	34.30	8.43	39.21	84.30	87.82	---	---	Peak

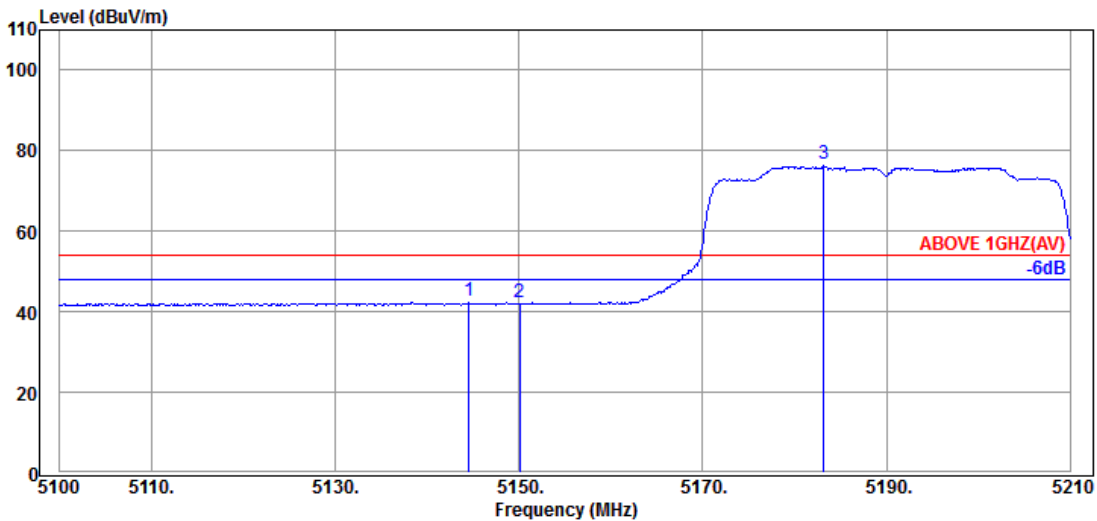


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.550	34.10	8.39	39.21	39.56	42.84	54.00	11.16	Average
5150.050	34.10	8.39	39.21	39.24	42.52	54.00	11.48	Average
@ 5183.160	34.23	8.41	39.21	73.14	76.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

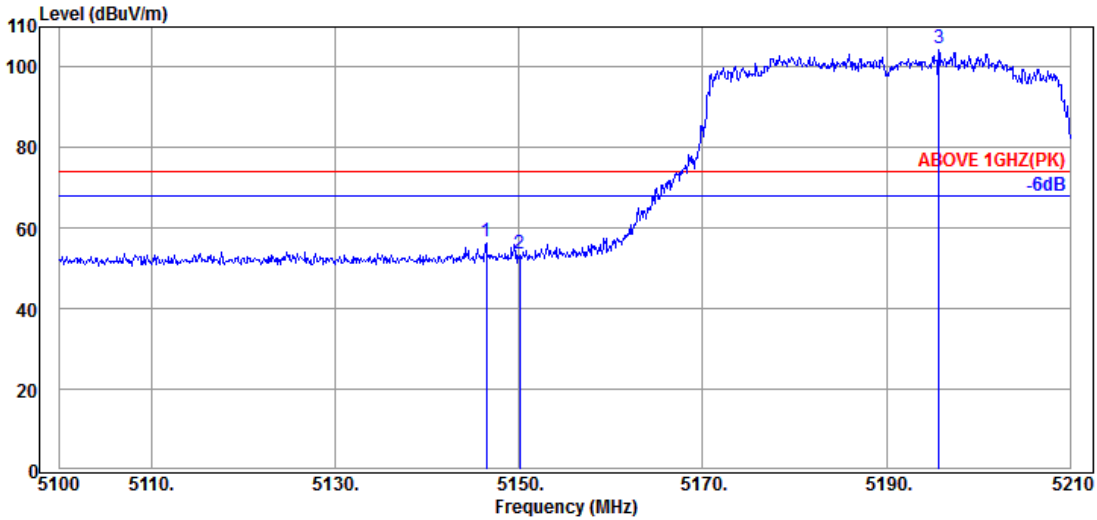

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.420	34.10	8.39	39.21	53.48	56.76	74.00	17.24	Peak
5150.050	34.10	8.39	39.21	50.54	53.82	74.00	20.18	Peak
@ 5195.700	34.30	8.43	39.21	101.12	104.64	---	---	Peak

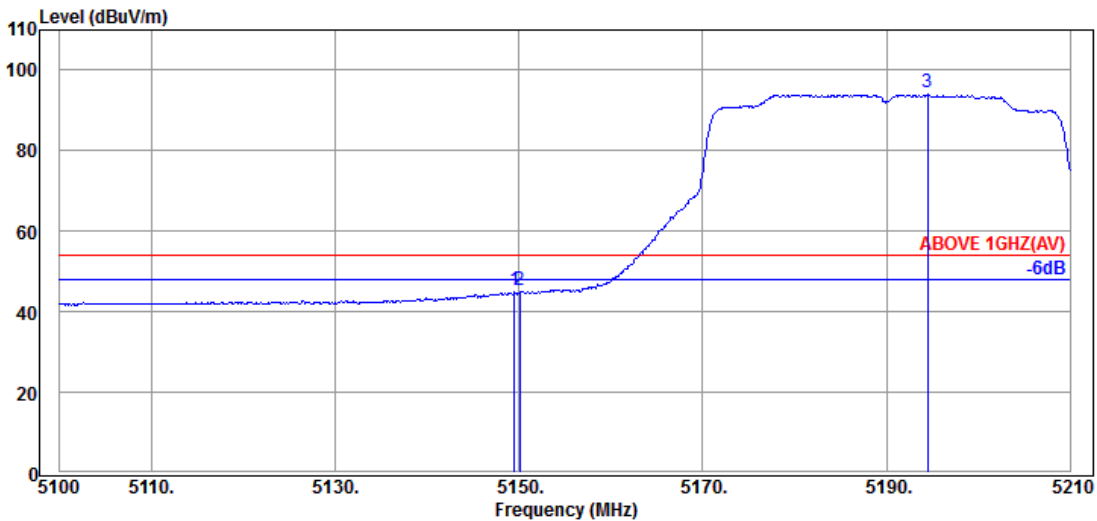


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.10	8.39	39.21	41.93	45.21	54.00	8.79	Average
5150.050	34.10	8.39	39.21	41.93	45.21	54.00	8.79	Average
@ 5194.490	34.30	8.43	39.21	91.07	94.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

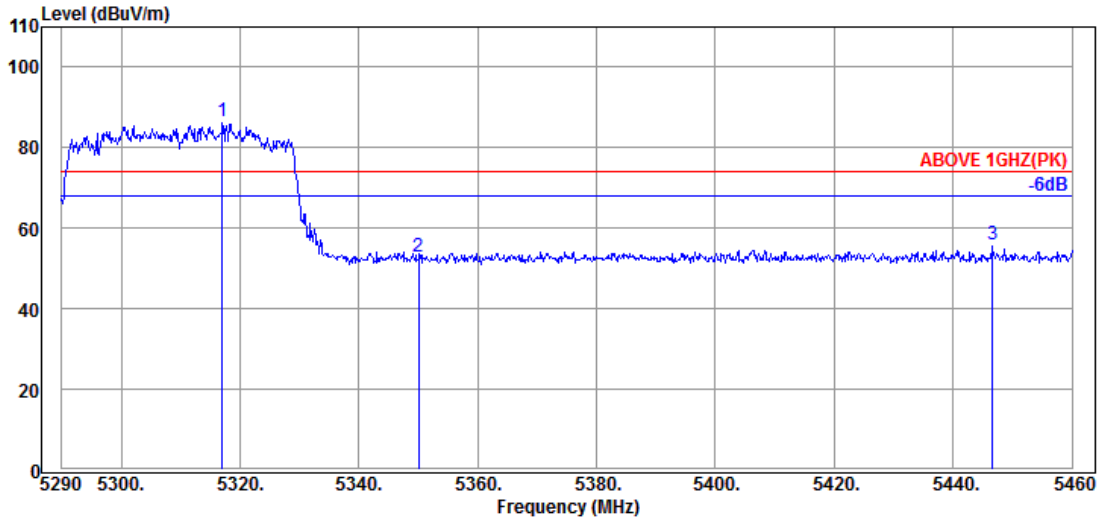

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.030	34.53	8.53	39.19	82.71	86.58	---	---	Peak
5350.010	34.60	8.56	39.19	49.12	53.09	74.00	20.91	Peak
5446.570	34.62	8.64	39.18	51.68	55.76	74.00	18.24	Peak

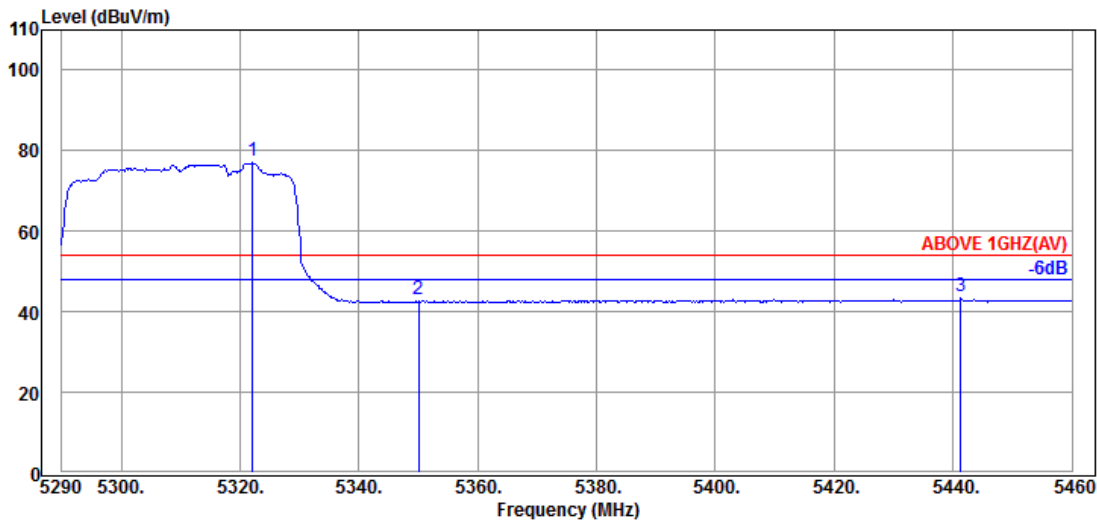


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.130	34.53	8.53	39.19	73.63	77.50	---	---	Average
5350.010	34.60	8.56	39.19	38.99	42.96	54.00	11.04	Average
5441.300	34.62	8.63	39.18	39.62	43.69	54.00	10.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

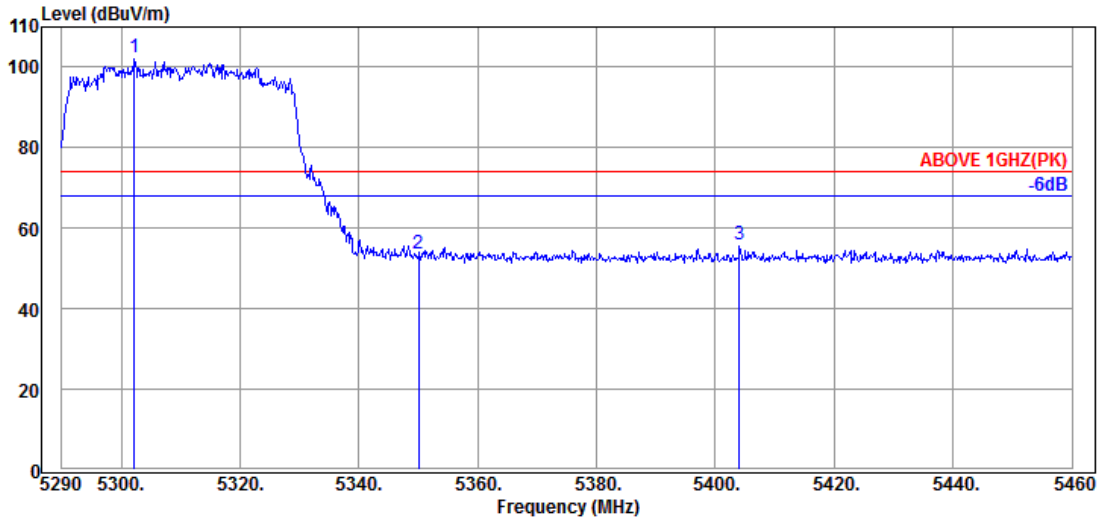

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	34.50	8.51	39.19	98.76	102.58	---	---	Peak
5350.010	34.60	8.56	39.19	49.77	53.74	74.00	20.26	Peak
5404.070	34.67	8.60	39.18	51.86	55.95	74.00	18.05	Peak

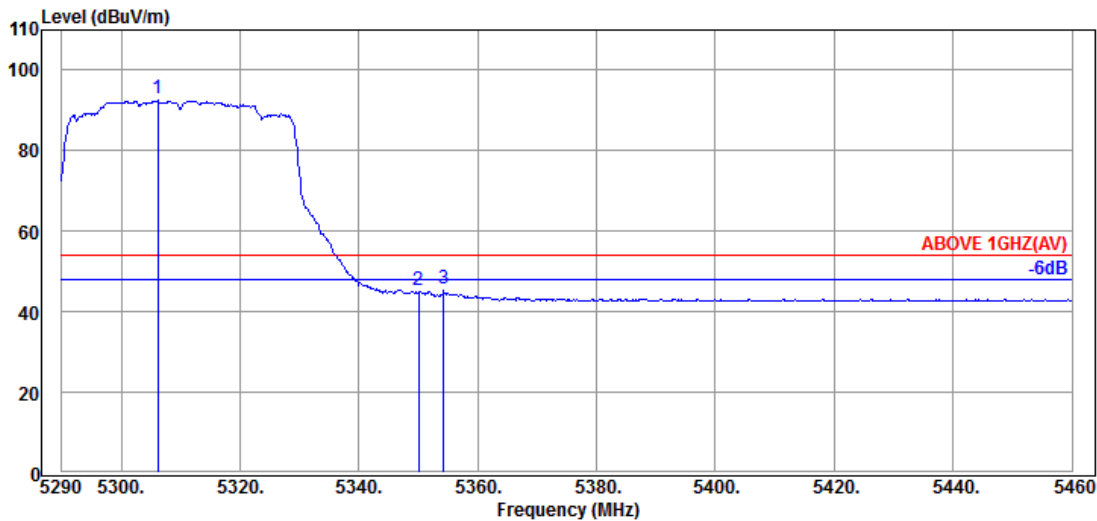


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.150	34.50	8.51	39.19	89.10	92.92	---	---	Average
5350.010	34.60	8.56	39.19	41.33	45.30	54.00	8.70	Average
5354.260	34.63	8.56	39.19	41.56	45.56	54.00	8.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

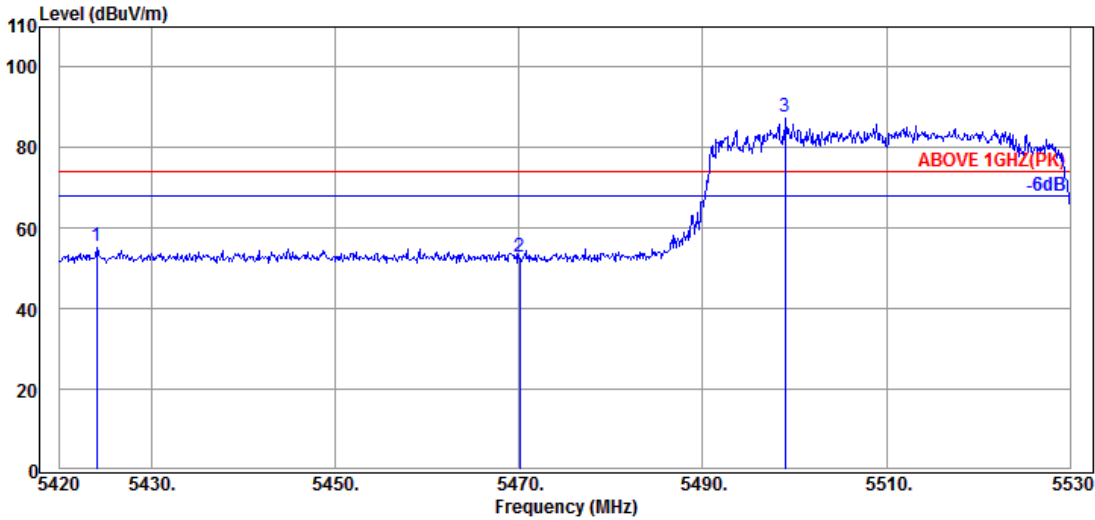

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.070	34.65	8.61	39.18	51.40	55.48	74.00	18.52	Peak
5470.050	34.57	8.65	39.17	48.74	52.79	74.00	21.21	Peak
@ 5498.980	34.50	8.68	39.17	83.66	87.67	---	---	Peak

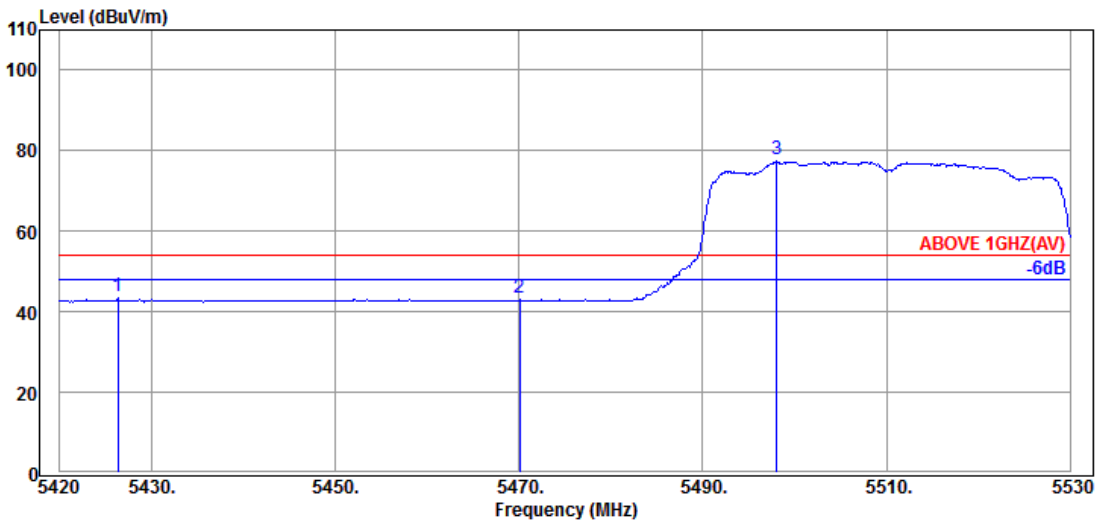


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.380	34.65	8.61	39.18	39.75	43.83	54.00	10.17	Average
5470.050	34.57	8.65	39.17	39.26	43.31	54.00	10.69	Average
@ 5498.100	34.50	8.68	39.17	73.90	77.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

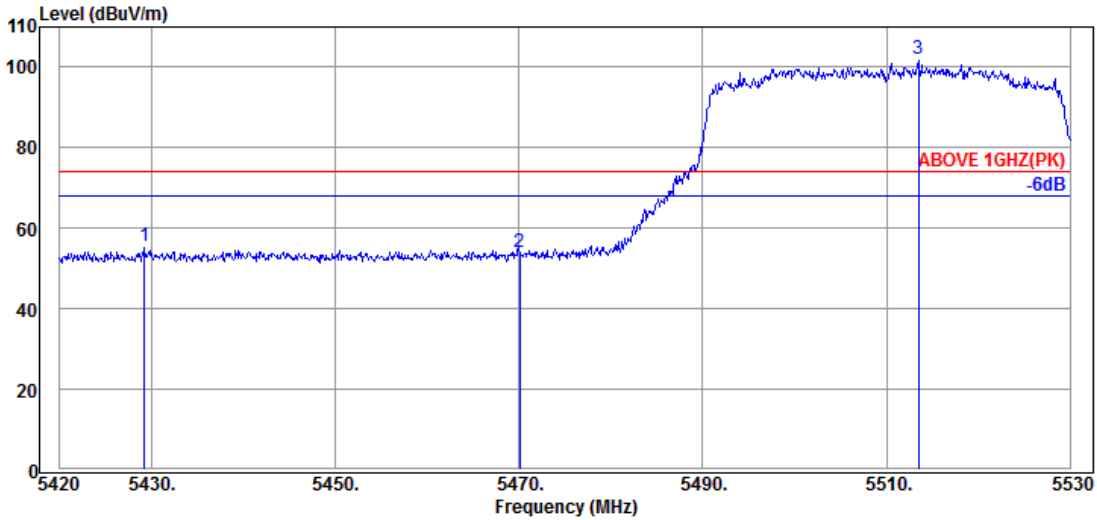

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.240	34.65	8.63	39.18	51.35	55.45	74.00	18.55	Peak
5470.050	34.57	8.65	39.17	49.97	54.02	74.00	19.98	Peak
@ 5513.500	34.53	8.70	39.17	98.05	102.11	---	---	Peak

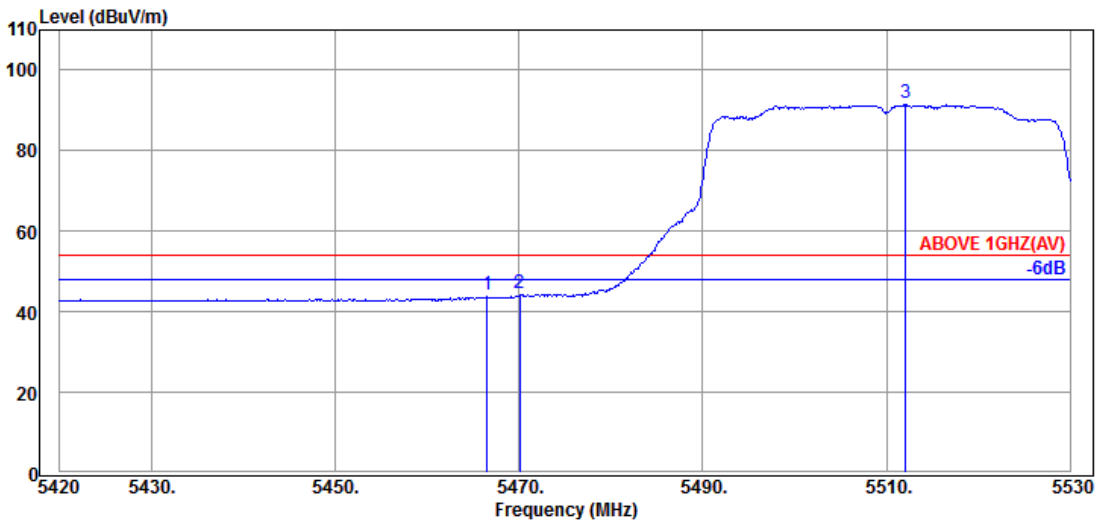


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.530	34.57	8.65	39.17	40.33	44.38	54.00	9.62	Average
5470.050	34.57	8.65	39.17	40.58	44.63	54.00	9.37	Average
@ 5512.070	34.53	8.68	39.17	88.00	92.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

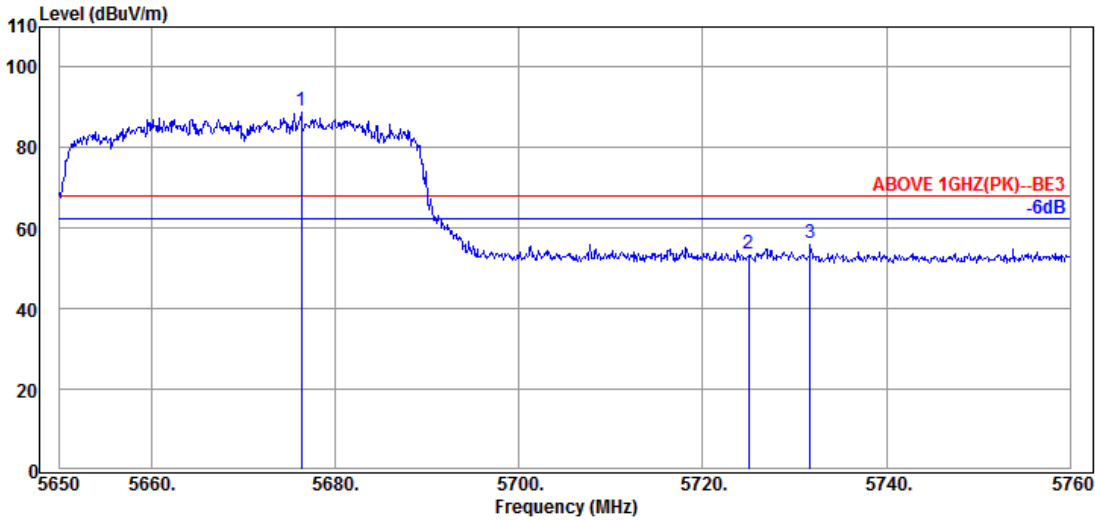

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.290	34.53	8.82	39.22	85.20	89.33	---	---	Peak
5725.020	34.50	8.86	39.23	49.51	53.64	68.20	14.56	Peak
5731.730	34.50	8.86	39.23	52.11	56.24	68.20	11.96	Peak

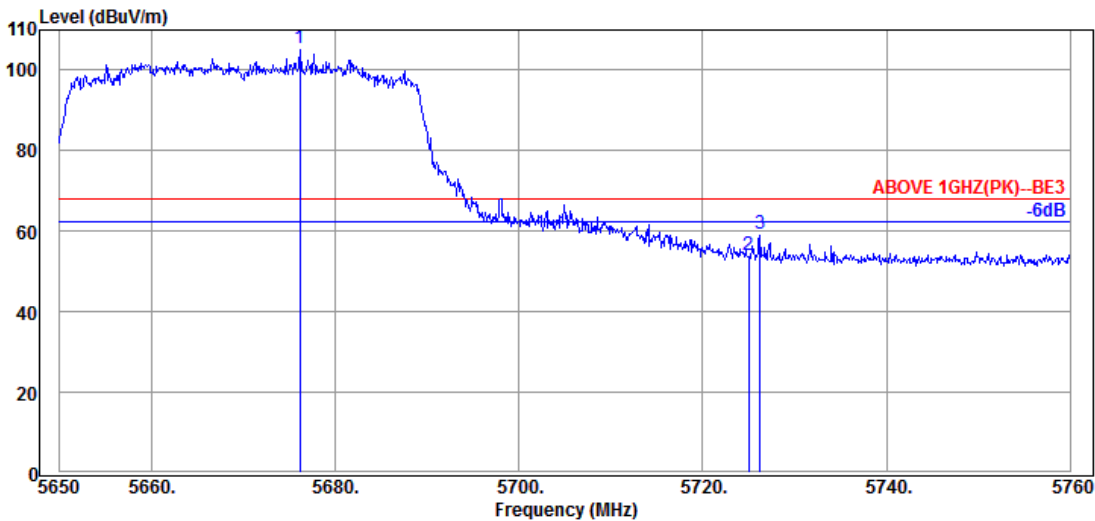


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.180	34.53	8.82	39.22	101.18	105.31	---	---	Peak
5725.020	34.50	8.86	39.23	49.87	54.00	68.20	14.20	Peak
5726.230	34.50	8.86	39.23	55.07	59.20	68.20	9.00	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

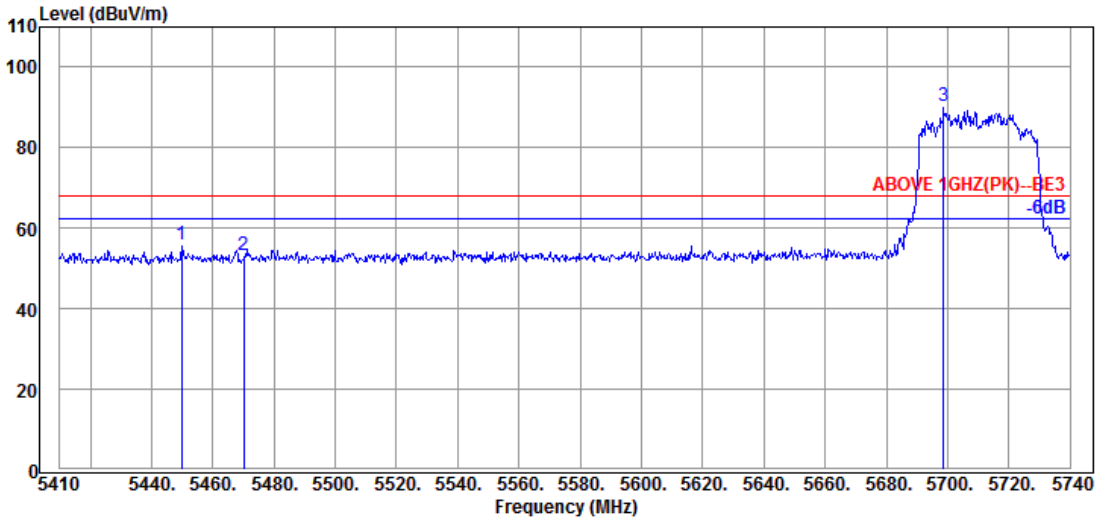

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.930	34.60	8.64	39.18	51.81	55.87	68.20	12.33	Peak
5470.060	34.57	8.65	39.17	49.23	53.28	68.20	14.92	Peak
@ 5698.750	34.50	8.84	39.22	86.12	90.24	---	---	Peak

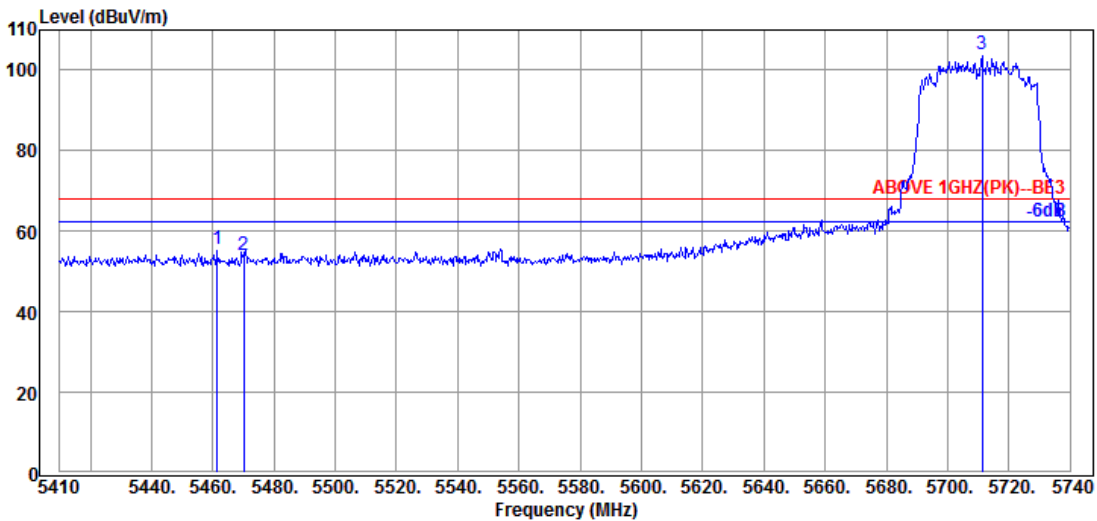


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.480	34.60	8.64	39.17	51.52	55.59	68.20	12.61	Peak
5470.060	34.57	8.65	39.17	49.99	54.04	68.20	14.16	Peak
@ 5711.290	34.50	8.85	39.23	99.91	104.03	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

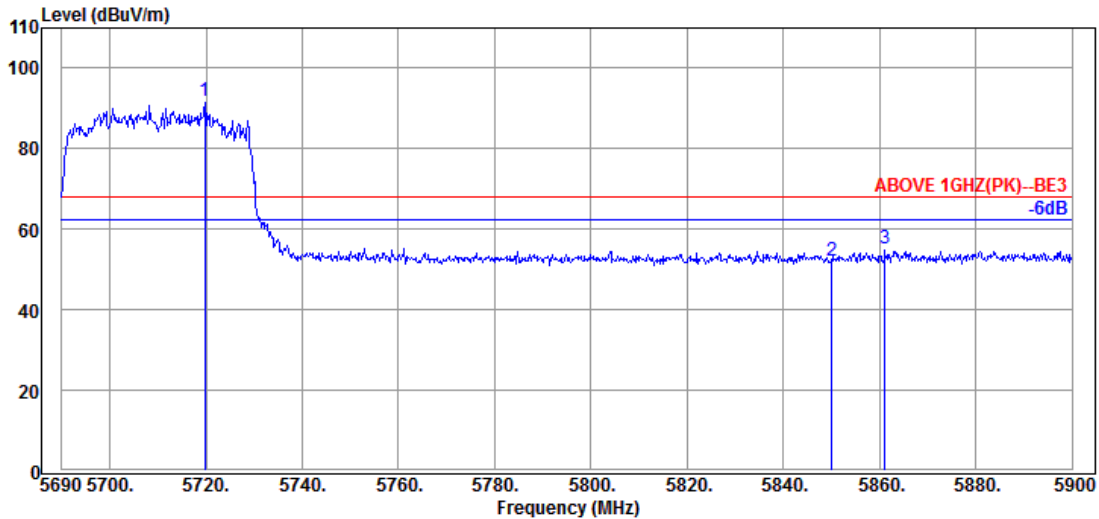

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.820	34.50	8.86	39.23	87.91	92.04	---	---	Peak
5850.020	34.40	8.96	39.26	48.16	52.26	68.20	15.94	Peak
5861.150	34.43	8.98	39.27	51.19	55.33	68.20	12.87	Peak

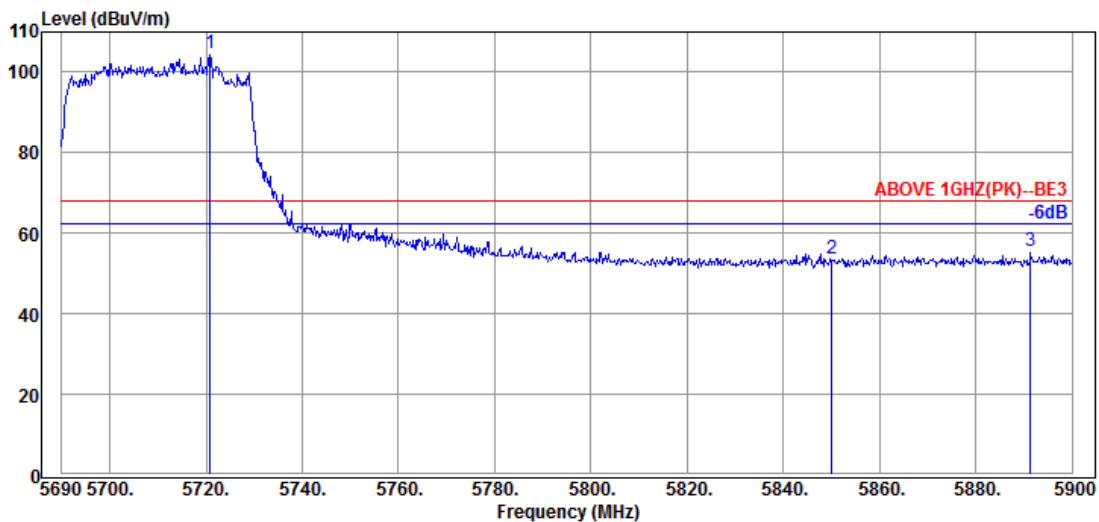


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.870	34.50	8.86	39.23	100.69	104.82	---	---	Peak
5850.020	34.40	8.96	39.26	49.47	53.57	68.20	14.63	Peak
5891.390	34.50	9.01	39.27	51.31	55.55	68.20	12.65	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

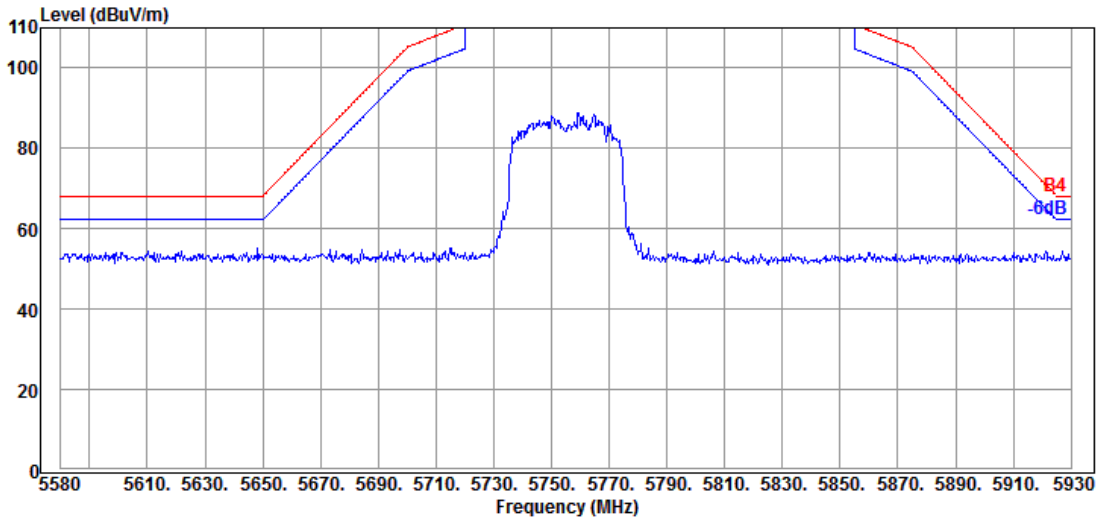


Antenna at Vertical Polarization

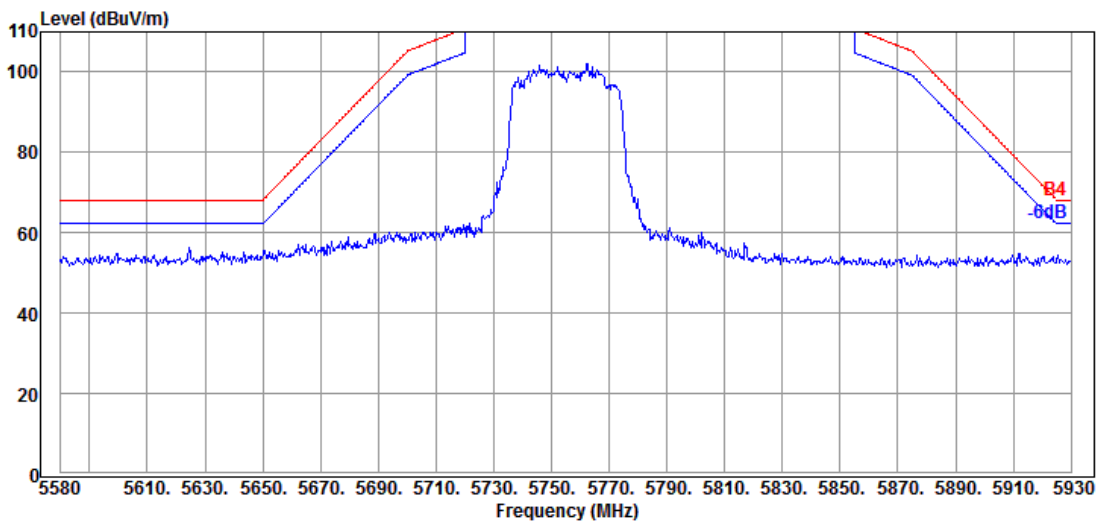


Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

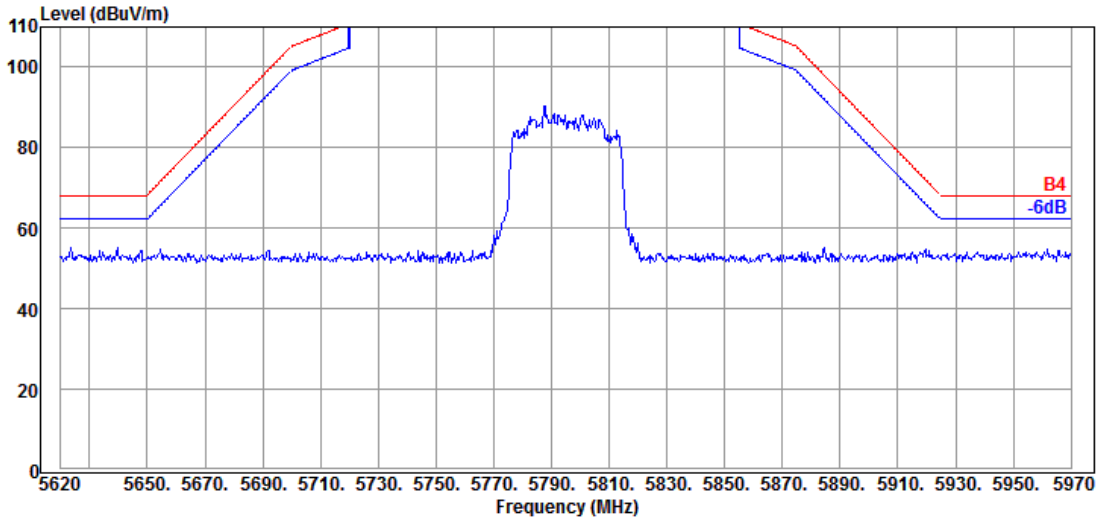

Antenna at Vertical Polarization

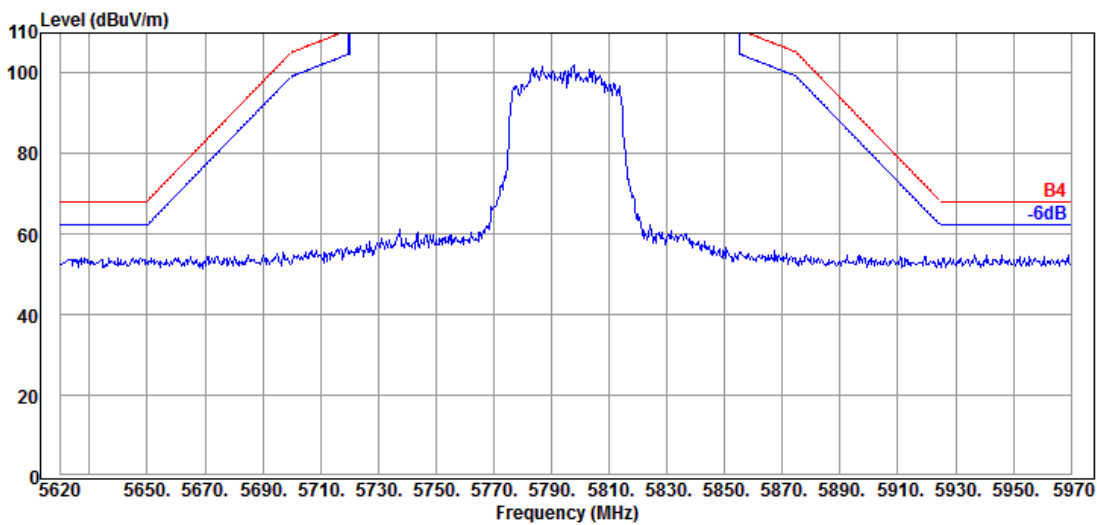


Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

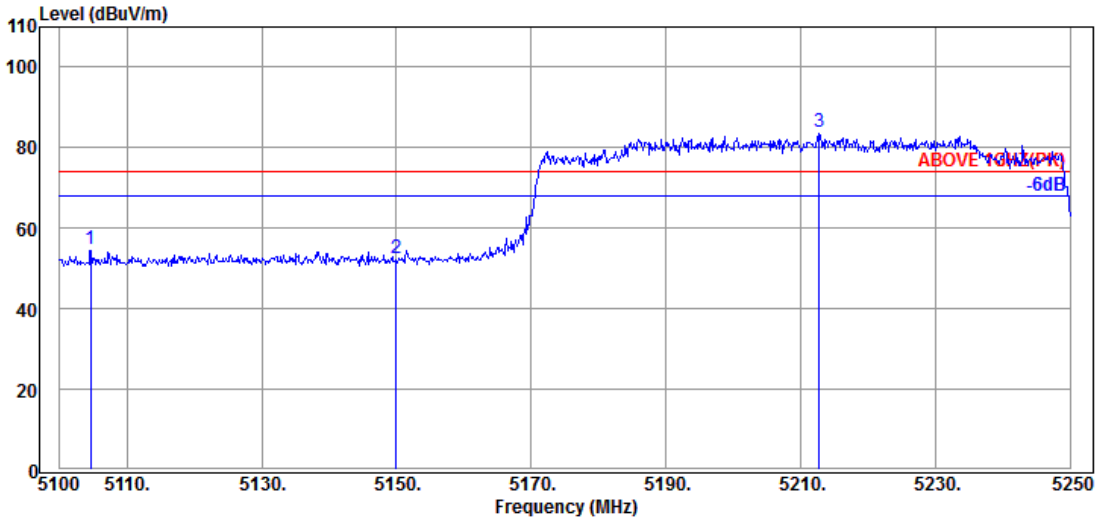

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.650	33.90	8.34	39.22	51.89	54.91	74.00	19.09	Peak
5149.950	34.10	8.39	39.21	49.23	52.51	74.00	21.49	Peak
@ 5212.800	34.35	8.44	39.20	80.26	83.85	---	---	Peak

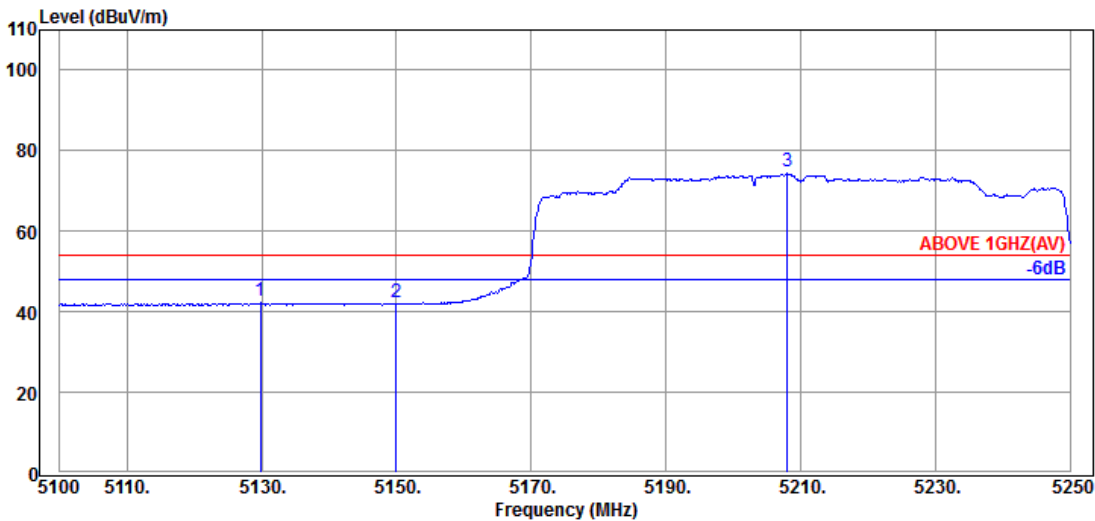


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.850	34.03	8.37	39.21	39.53	42.72	54.00	11.28	Average
5149.950	34.10	8.39	39.21	39.13	42.41	54.00	11.59	Average
@ 5208.000	34.35	8.44	39.20	71.20	74.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

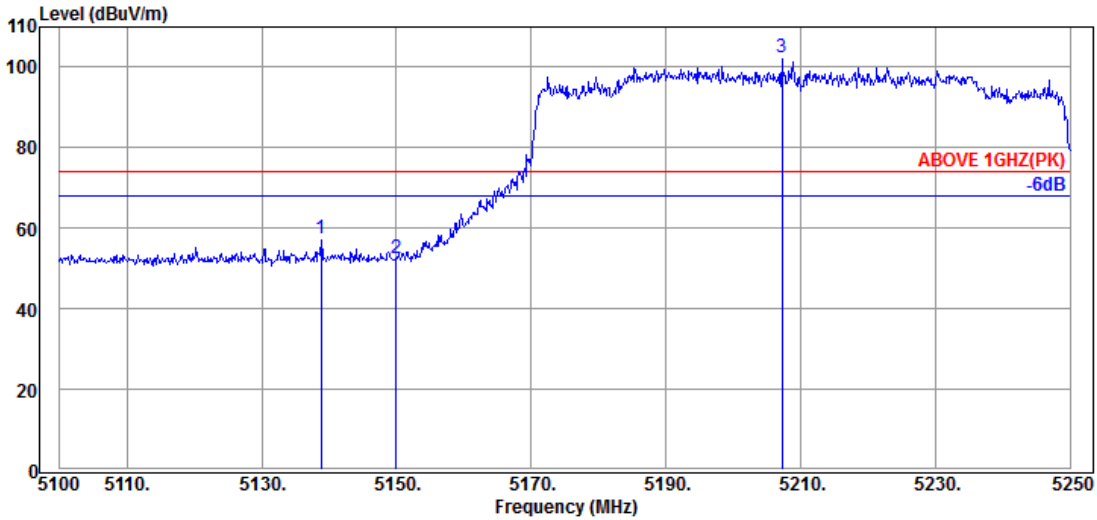

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.850	34.03	8.37	39.21	54.44	57.63	74.00	16.37	Peak
5149.950	34.10	8.39	39.21	49.09	52.37	74.00	21.63	Peak
@ 5207.250	34.35	8.43	39.20	98.84	102.42	---	---	Peak

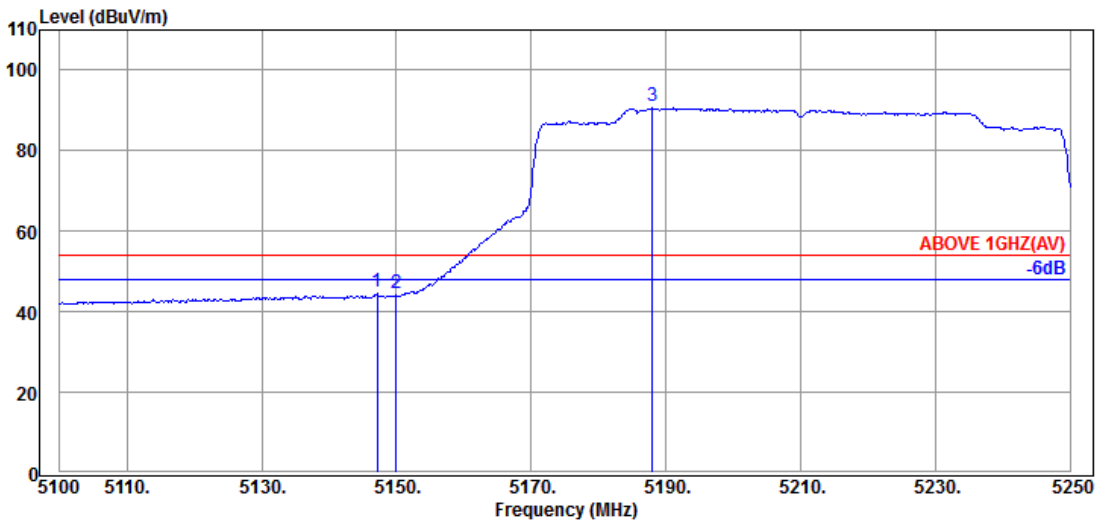


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.10	8.39	39.21	41.58	44.86	54.00	9.14	Average
5149.950	34.10	8.39	39.21	41.32	44.60	54.00	9.40	Average
@ 5188.050	34.30	8.41	39.21	87.66	91.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

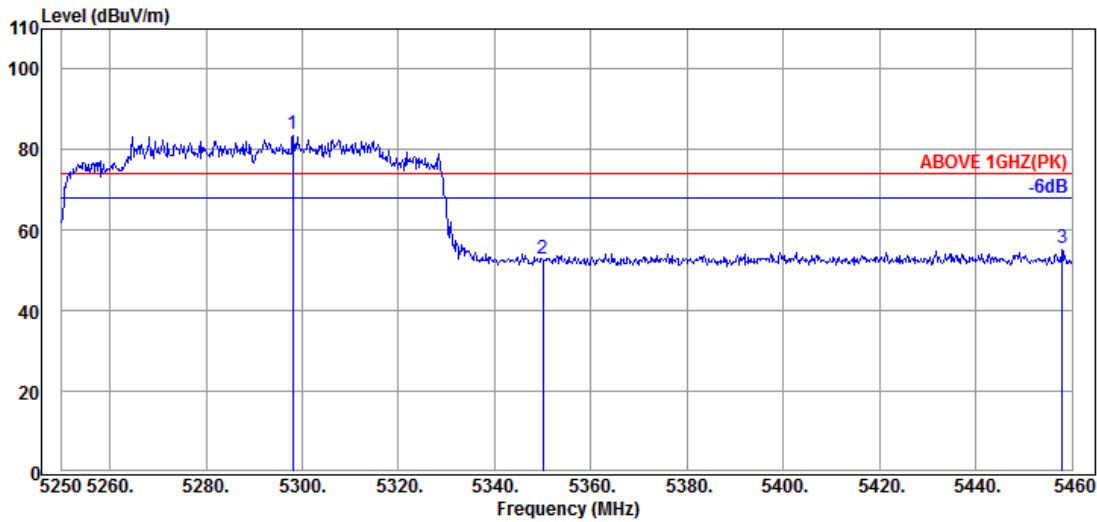

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.090	34.50	8.51	39.19	80.25	84.07	---	---	Peak
5349.960	34.60	8.56	39.19	49.00	52.97	74.00	21.03	Peak
5457.900	34.60	8.64	39.17	51.51	55.58	74.00	18.42	Peak

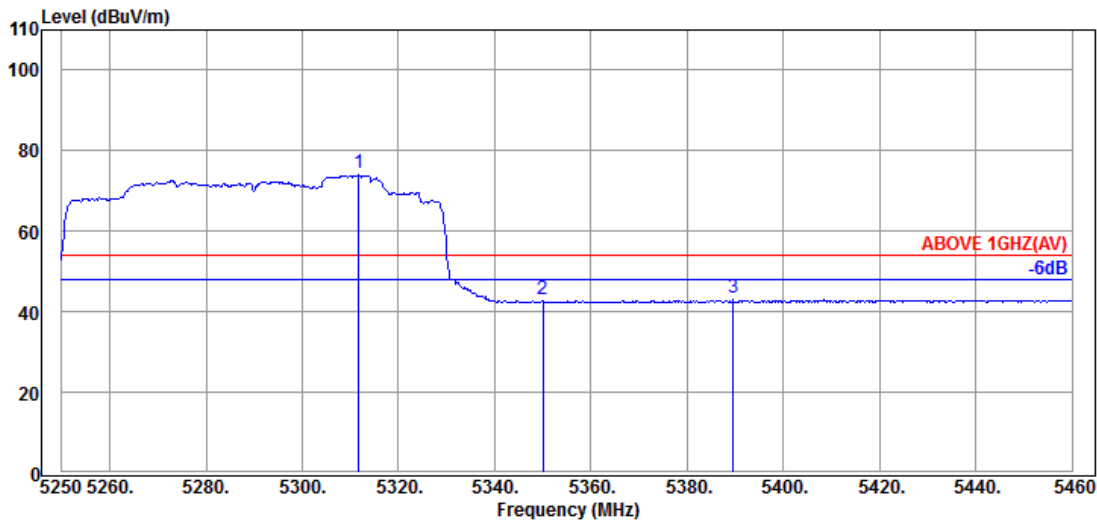


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.740	34.53	8.53	39.19	70.56	74.43	---	---	Average
5349.960	34.60	8.56	39.19	39.21	43.18	54.00	10.82	Average
5389.650	34.70	8.58	39.18	39.44	43.54	54.00	10.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

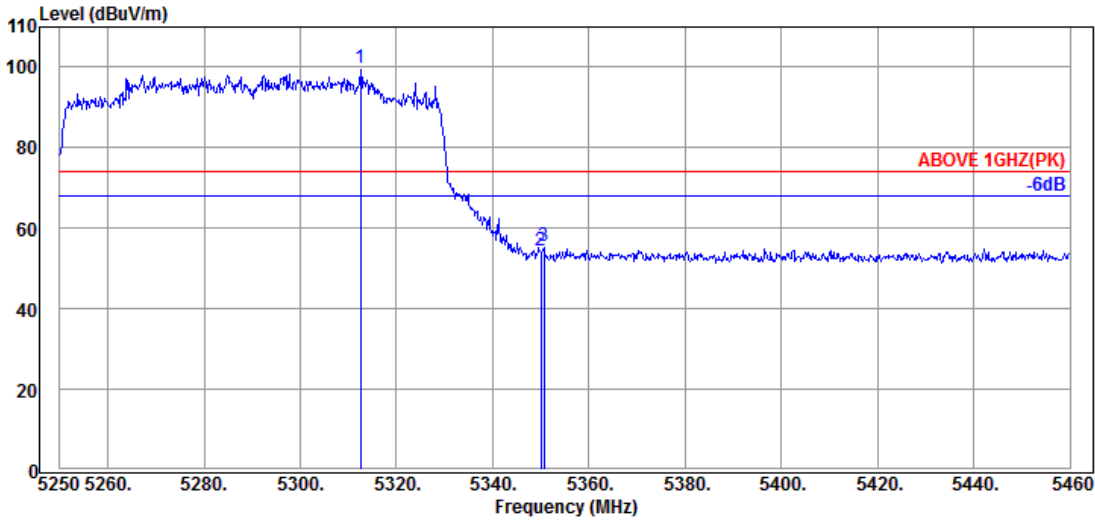

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.580	34.53	8.53	39.19	96.06	99.93	---	---	Peak
5349.960	34.60	8.56	39.19	50.64	54.61	74.00	19.39	Peak
5350.590	34.60	8.56	39.19	51.74	55.71	74.00	18.29	Peak

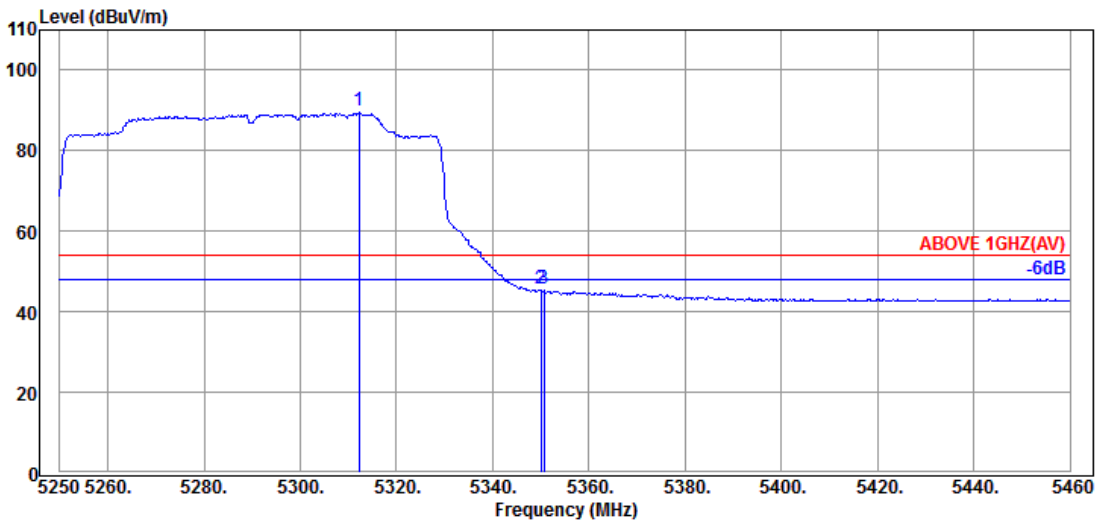


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.160	34.53	8.53	39.19	86.17	90.04	---	---	Average
5349.960	34.60	8.56	39.19	41.76	45.73	54.00	8.27	Average
5350.590	34.60	8.56	39.19	41.82	45.79	54.00	8.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

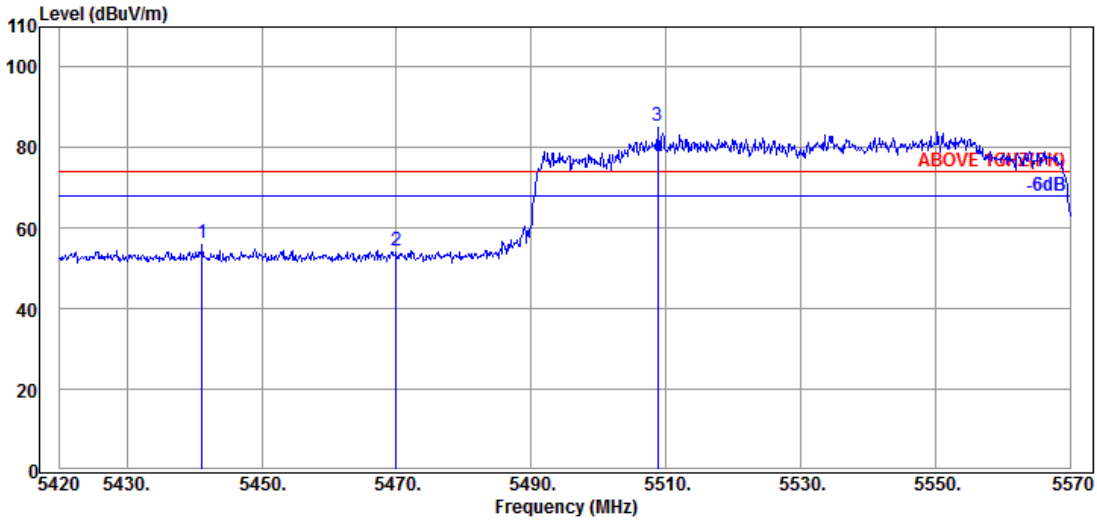

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.150	34.62	8.63	39.18	52.29	56.36	74.00	17.64	Peak
5469.950	34.57	8.65	39.17	50.20	54.25	74.00	19.75	Peak
@ 5508.800	34.50	8.68	39.17	81.37	85.38	---	---	Peak

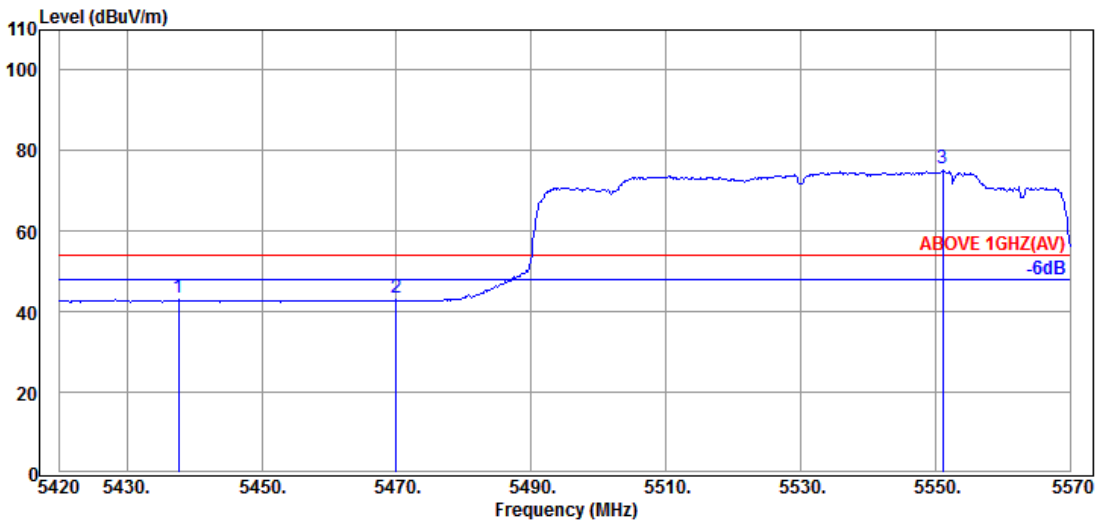


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.700	34.62	8.63	39.18	39.53	43.60	54.00	10.40	Average
5469.950	34.57	8.65	39.17	39.29	43.34	54.00	10.66	Average
@ 5551.100	34.60	8.72	39.18	71.59	75.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

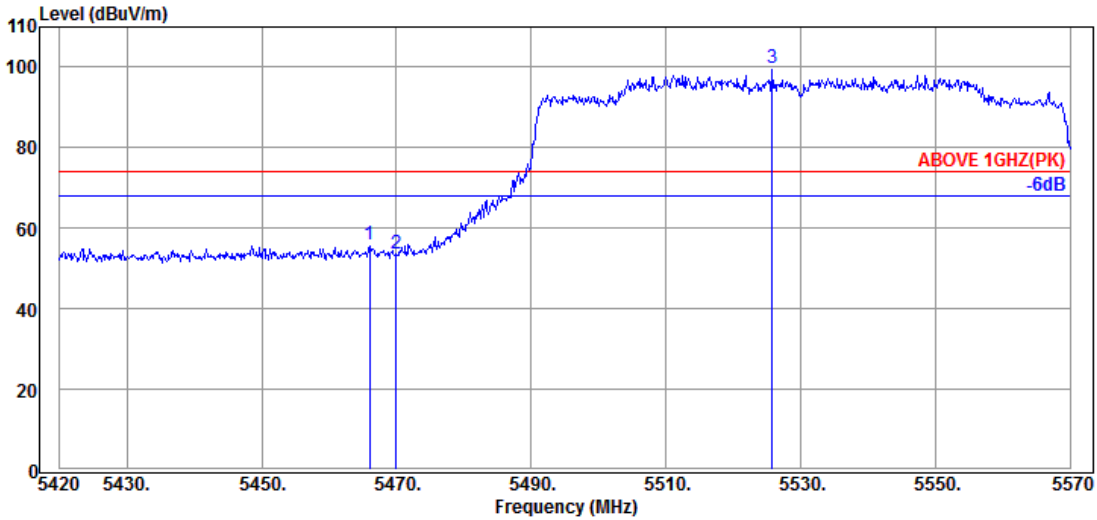

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.050	34.57	8.65	39.17	52.06	56.11	74.00	17.89	Peak
5469.950	34.57	8.65	39.17	49.49	53.54	74.00	20.46	Peak
@ 5525.750	34.53	8.70	39.18	95.86	99.91	---	---	Peak

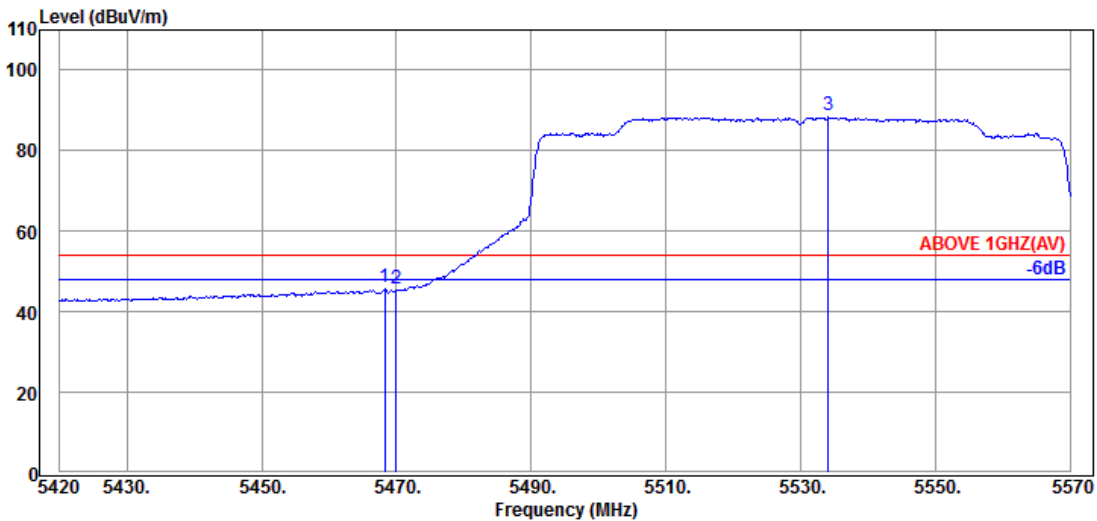


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.57	8.65	39.17	42.15	46.20	54.00	7.80	Average
5469.950	34.57	8.65	39.17	41.87	45.92	54.00	8.08	Average
@ 5534.150	34.57	8.71	39.18	84.81	88.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

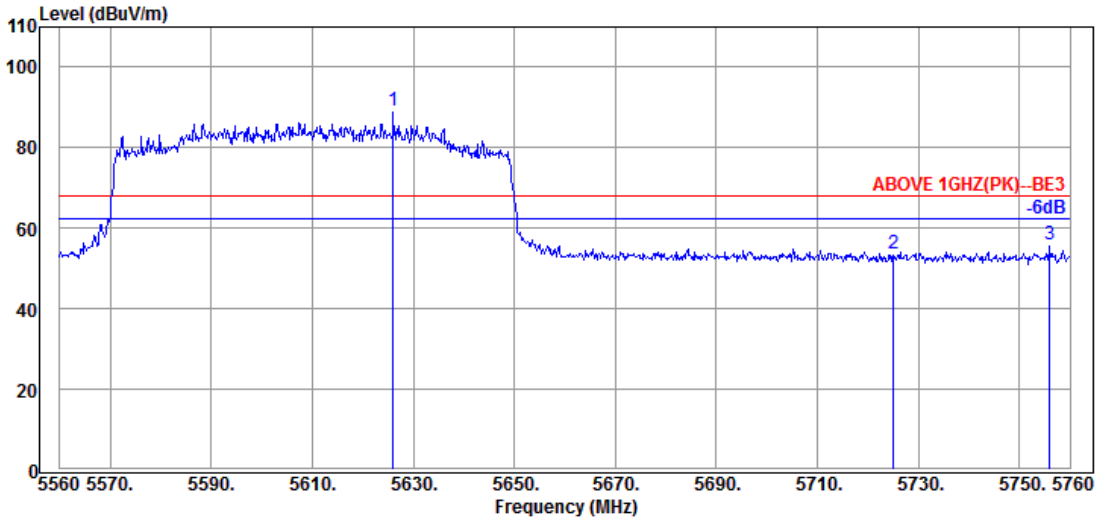

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.000	34.60	8.78	39.20	85.18	89.36	---	---	Peak
5725.000	34.50	8.86	39.23	49.53	53.66	68.20	14.54	Peak
5756.000	34.47	8.89	39.24	51.85	55.97	68.20	12.23	Peak

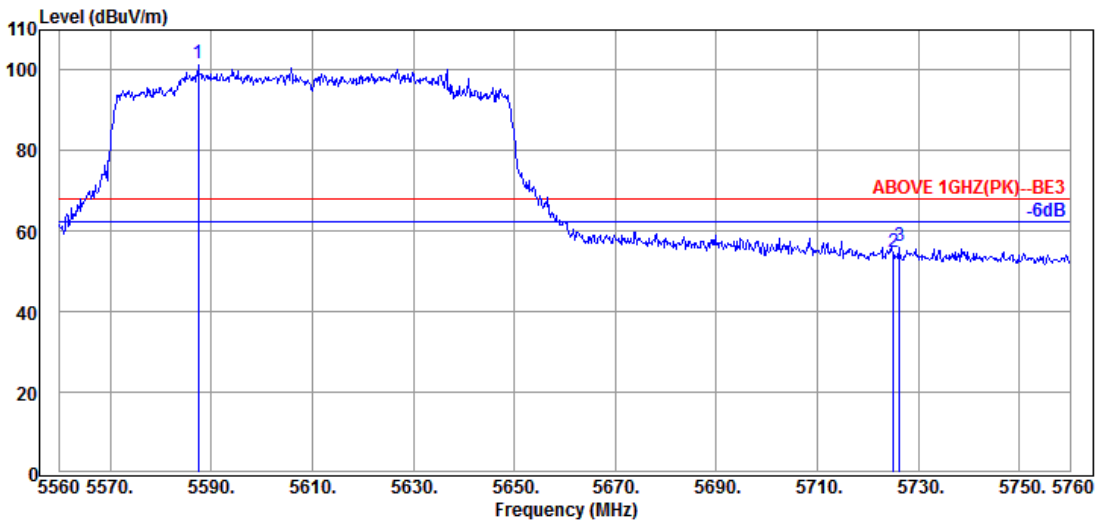


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5587.400	34.60	8.75	39.19	97.68	101.84	---	---	Peak
5725.000	34.50	8.86	39.23	50.57	54.70	68.20	13.50	Peak
5726.200	34.50	8.86	39.23	52.15	56.28	68.20	11.92	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

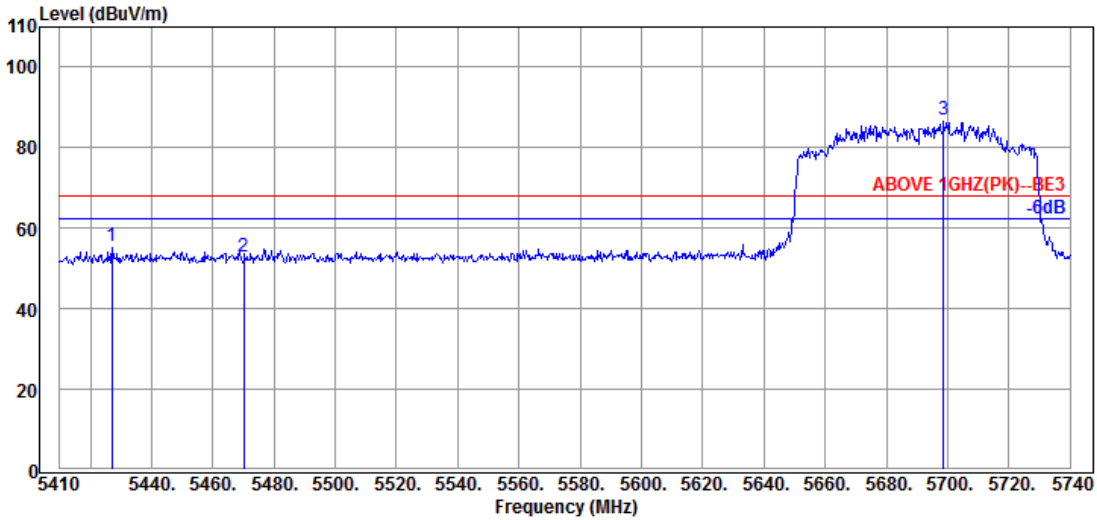

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.160	34.65	8.61	39.18	51.35	55.43	68.20	12.77	Peak
5470.060	34.57	8.65	39.17	48.77	52.82	68.20	15.38	Peak
@ 5698.750	34.50	8.84	39.22	82.88	87.00	---	---	Peak

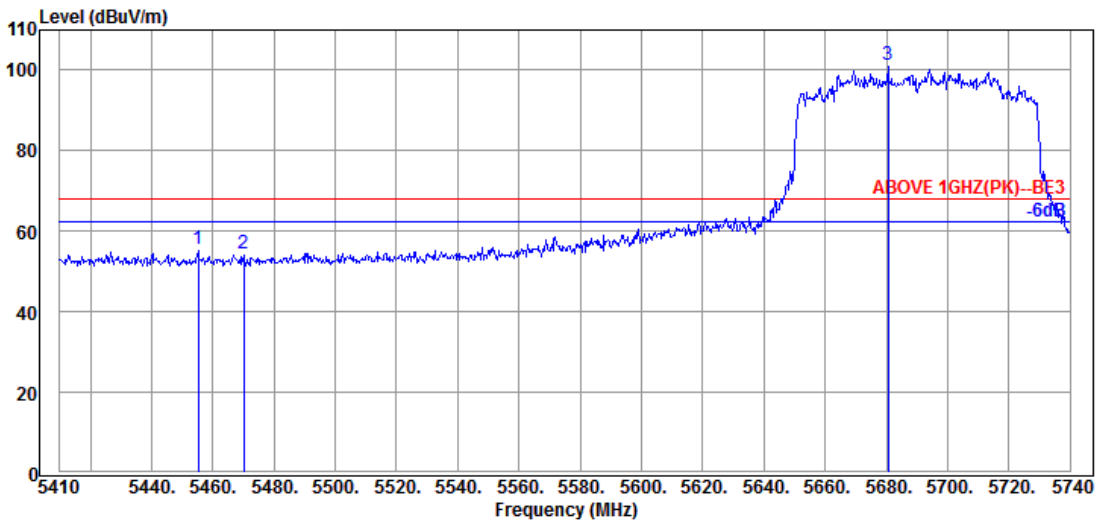


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.210	34.60	8.64	39.17	51.48	55.55	68.20	12.65	Peak
5470.060	34.57	8.65	39.17	50.27	54.32	68.20	13.88	Peak
@ 5680.600	34.53	8.82	39.22	97.03	101.16	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

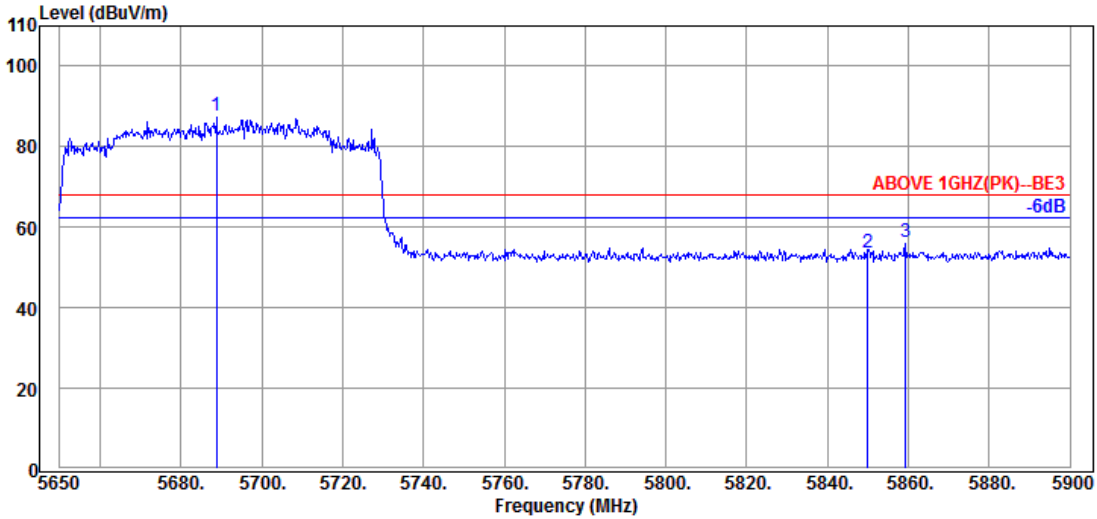

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.750	34.53	8.84	39.22	83.51	87.66	---	---	Peak
5850.000	34.40	8.96	39.26	49.60	53.70	68.20	14.50	Peak
5859.250	34.43	8.98	39.27	52.14	56.28	68.20	11.92	Peak

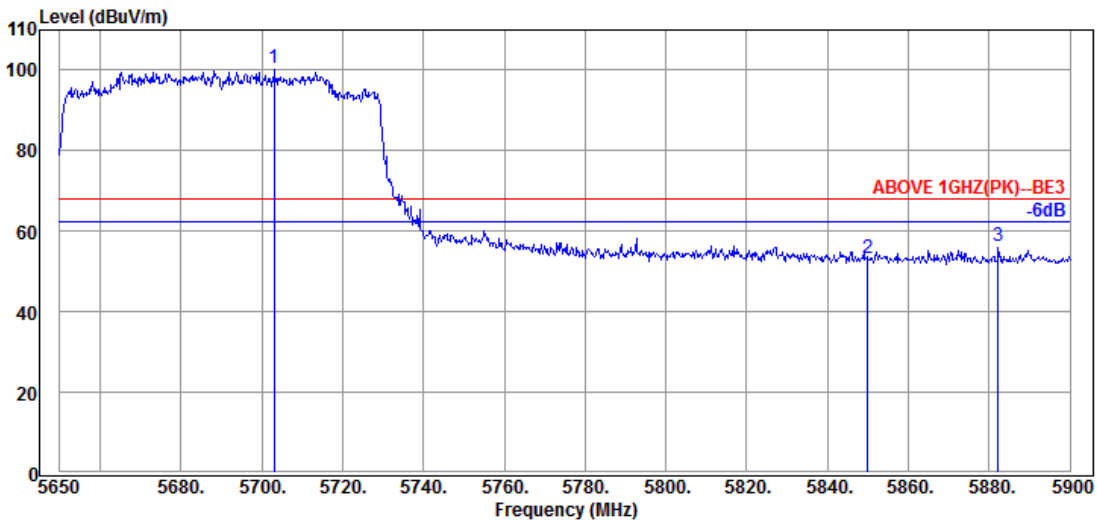


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.000	34.50	8.85	39.22	96.30	100.43	---	---	Peak
5850.000	34.40	8.96	39.26	49.31	53.41	68.20	14.79	Peak
5882.250	34.47	8.99	39.27	52.26	56.45	68.20	11.75	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	Band	NII-III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

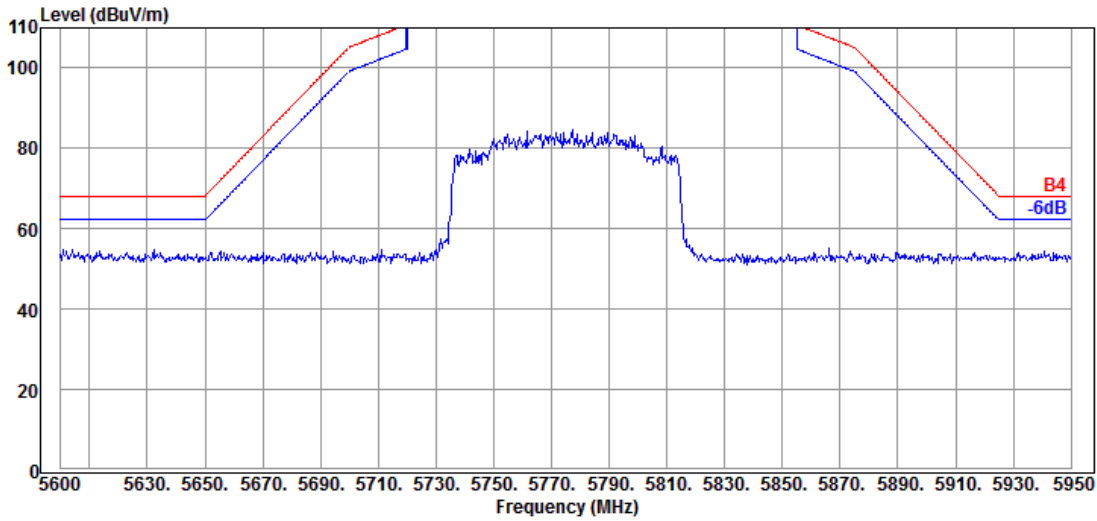

Antenna at Vertical Polarization

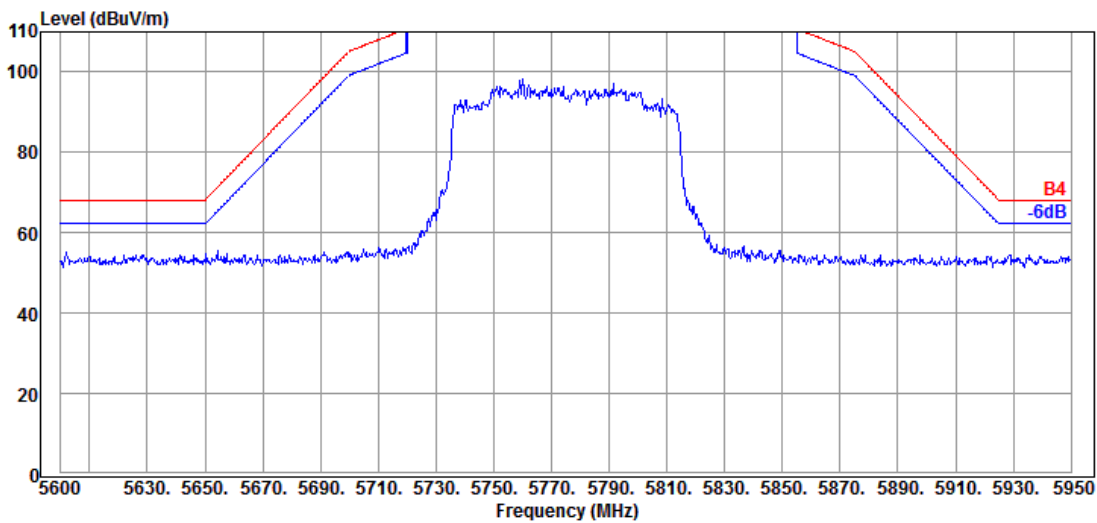


Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

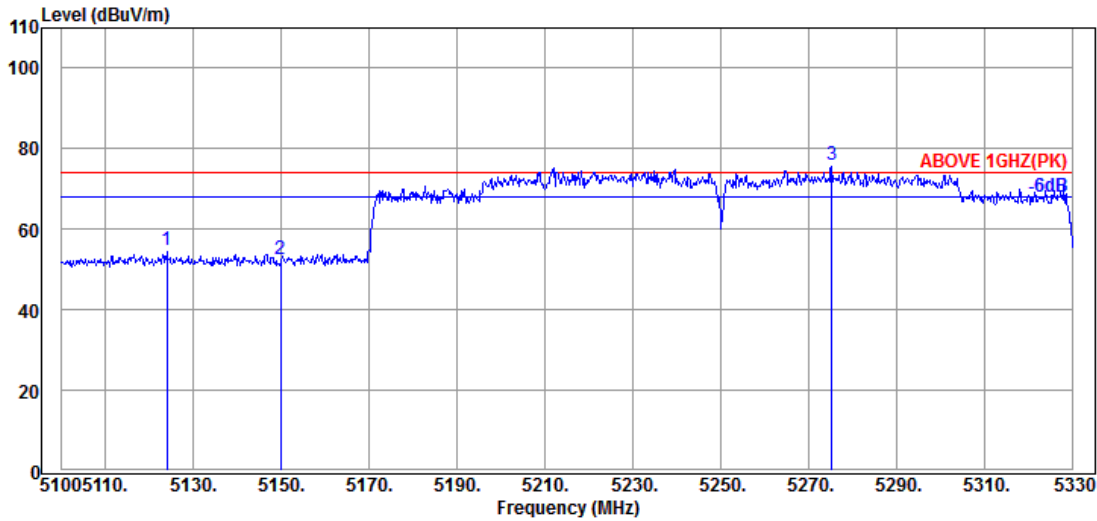

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.920	33.97	8.37	39.21	51.56	54.69	74.00	19.31	Peak
5149.910	34.10	8.39	39.21	49.35	52.63	74.00	21.37	Peak
@ 5275.260	34.50	8.49	39.20	72.29	76.08	---	---	Peak

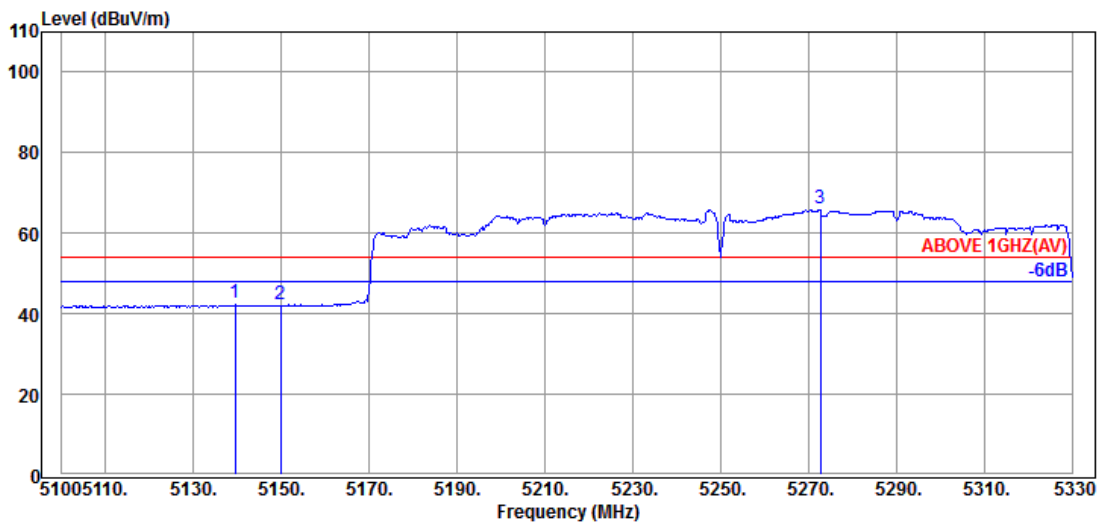


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.560	34.03	8.39	39.21	39.47	42.68	54.00	11.32	Average
5149.910	34.10	8.39	39.21	39.06	42.34	54.00	11.66	Average
@ 5272.730	34.50	8.49	39.20	62.53	66.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

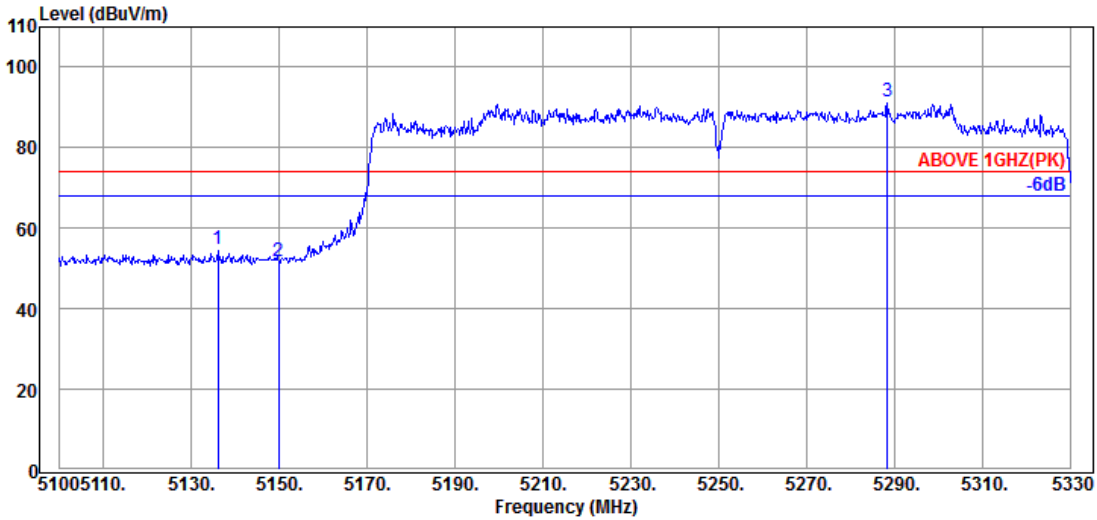

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.110	34.03	8.37	39.21	51.50	54.69	74.00	19.31	Peak
5149.910	34.10	8.39	39.21	48.61	51.89	74.00	22.11	Peak
@ 5288.370	34.50	8.50	39.19	87.75	91.56	---	---	Peak

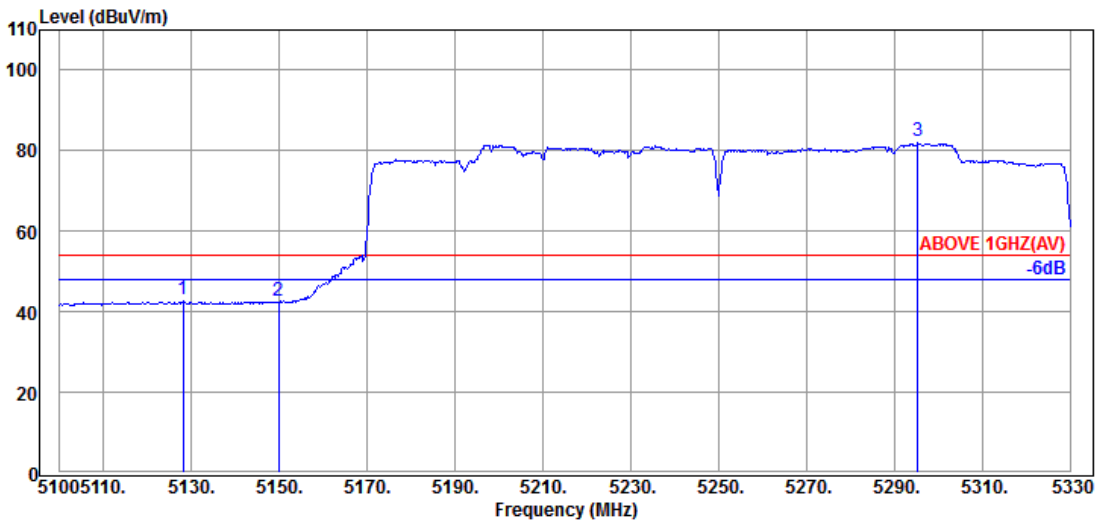


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.060	34.03	8.37	39.21	39.83	43.02	54.00	10.98	Average
5149.910	34.10	8.39	39.21	39.55	42.83	54.00	11.17	Average
@ 5295.270	34.50	8.51	39.19	78.54	82.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

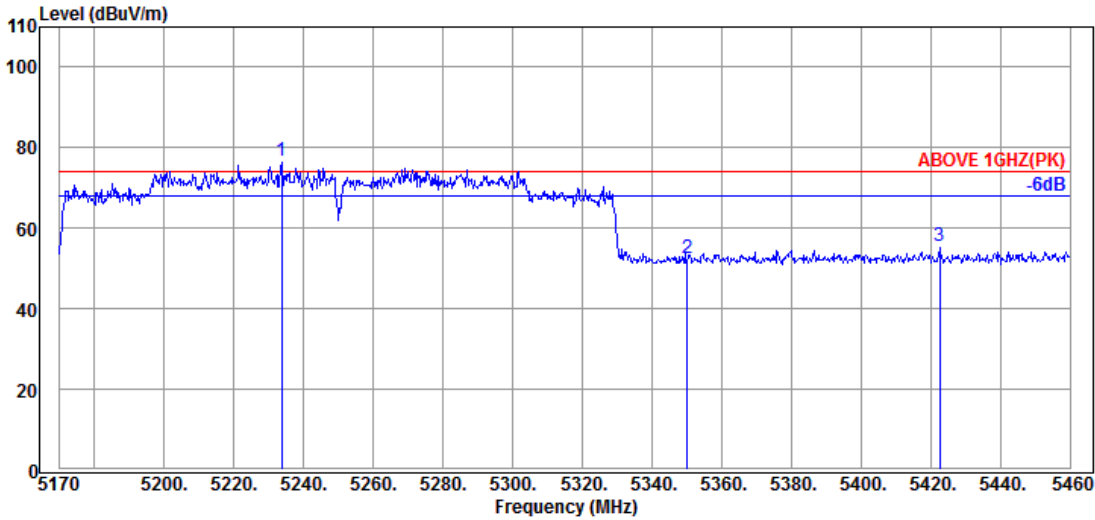

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5233.800	34.45	8.46	39.20	72.89	76.60	---	---	Peak
5350.090	34.60	8.56	39.19	48.62	52.59	74.00	21.41	Peak
5422.590	34.65	8.61	39.18	51.66	55.74	74.00	18.26	Peak

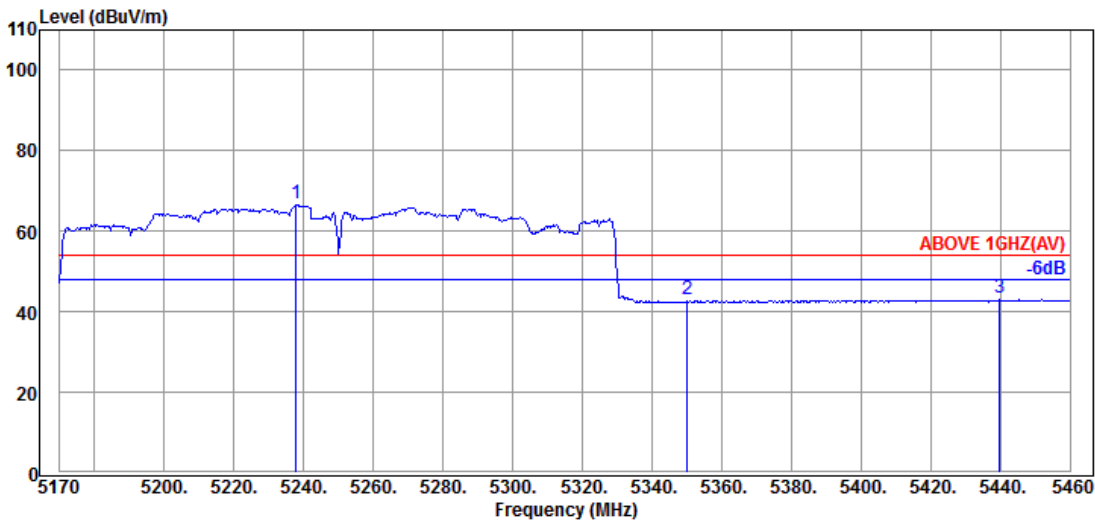


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5237.860	34.45	8.46	39.20	63.35	67.06	---	---	Average
5350.090	34.60	8.56	39.19	39.02	42.99	54.00	11.01	Average
5439.700	34.62	8.63	39.18	39.58	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

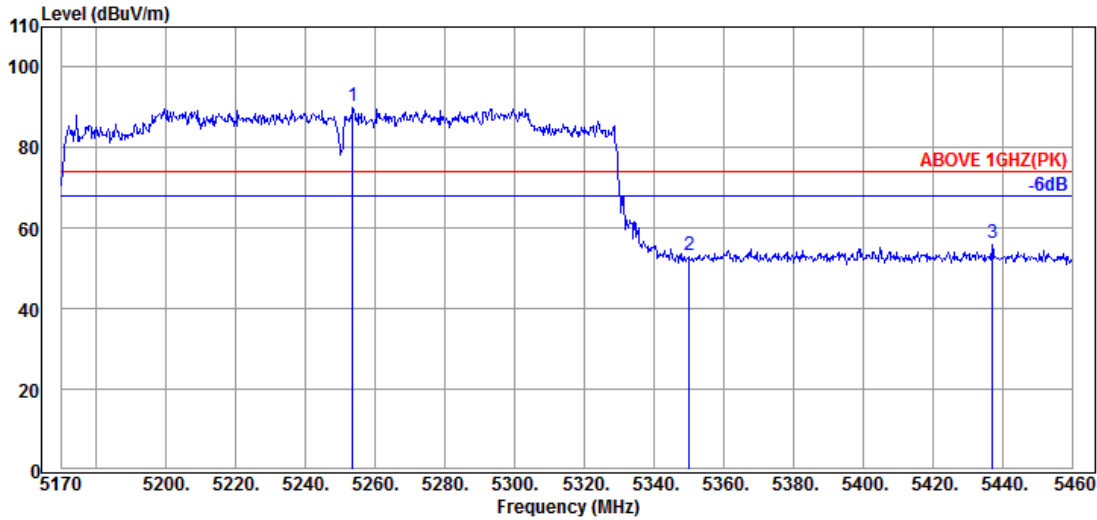

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5253.520	34.50	8.47	39.20	86.67	90.44	---	---	Peak
5350.090	34.60	8.56	39.19	49.35	53.32	74.00	20.68	Peak
5437.090	34.62	8.63	39.18	52.13	56.20	74.00	17.80	Peak

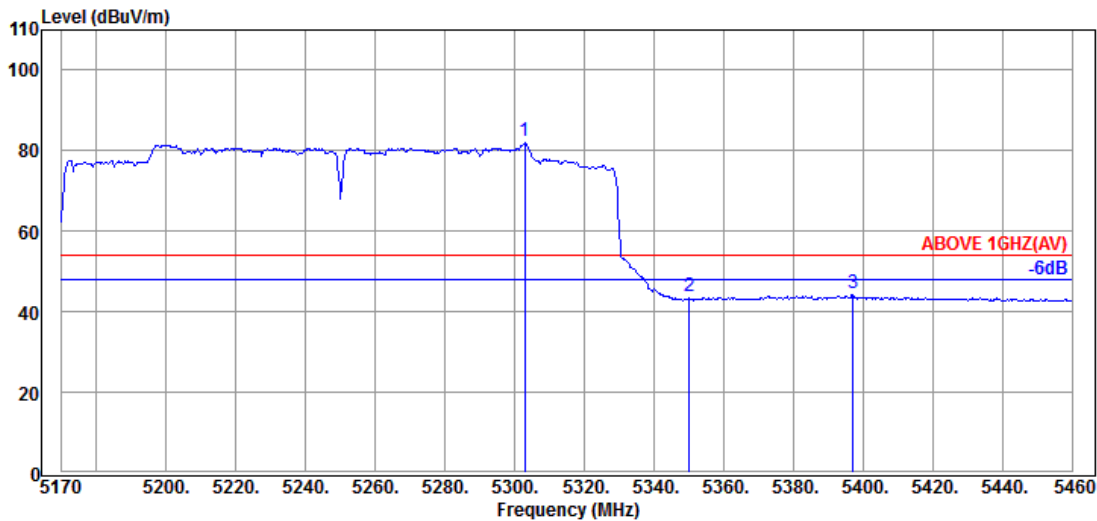


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.820	34.50	8.51	39.19	78.56	82.38	---	---	Average
5350.090	34.60	8.56	39.19	40.01	43.98	54.00	10.02	Average
5397.070	34.70	8.60	39.18	40.59	44.71	54.00	9.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

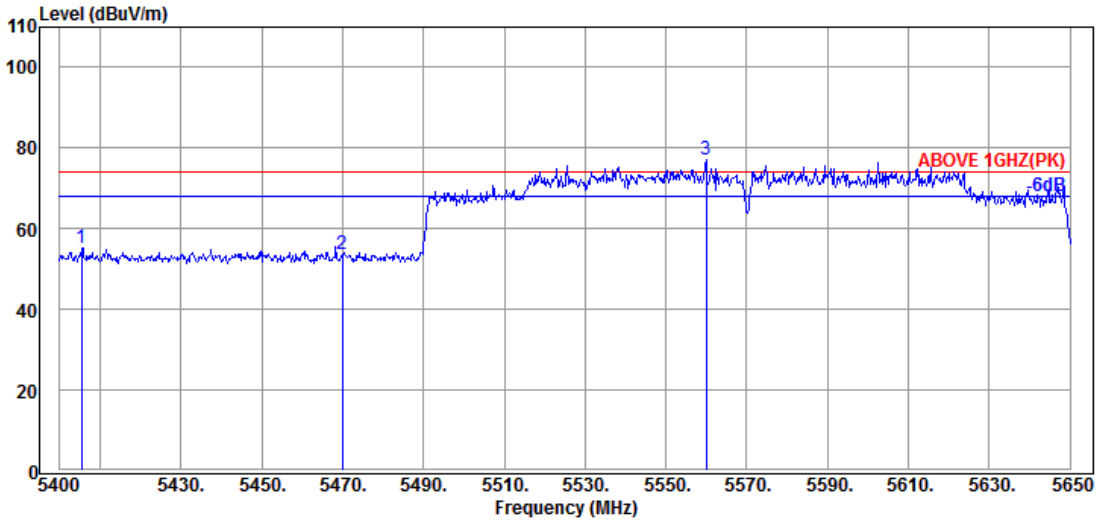

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5405.500	34.67	8.60	39.18	51.15	55.24	74.00	18.76	Peak
5470.000	34.57	8.65	39.17	49.77	53.82	74.00	20.18	Peak
@ 5560.000	34.60	8.72	39.19	73.15	77.28	---	---	Peak

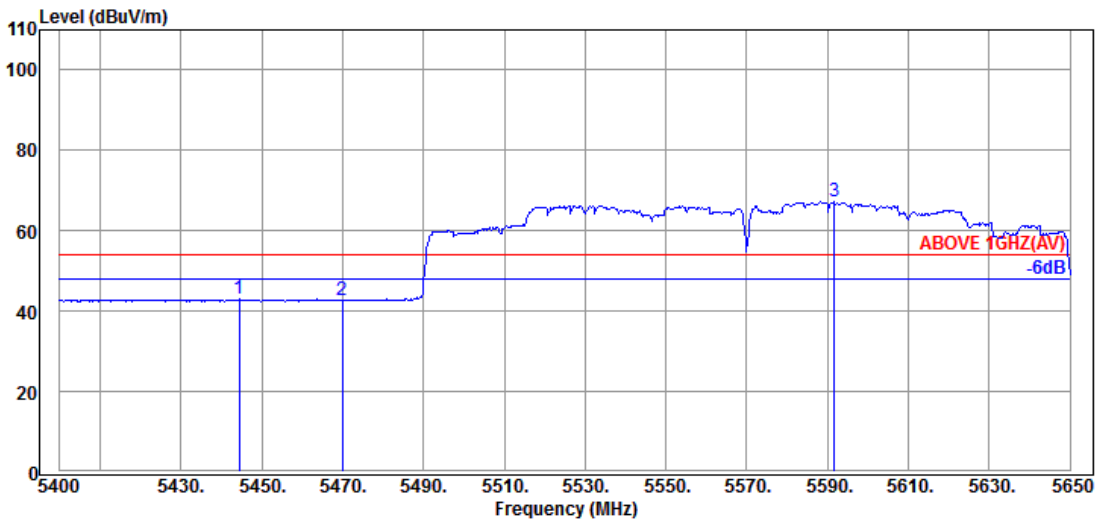


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.500	34.62	8.63	39.18	38.89	42.96	54.00	11.04	Average
5470.000	34.57	8.65	39.17	38.63	42.68	54.00	11.32	Average
@ 5591.750	34.60	8.75	39.19	63.00	67.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

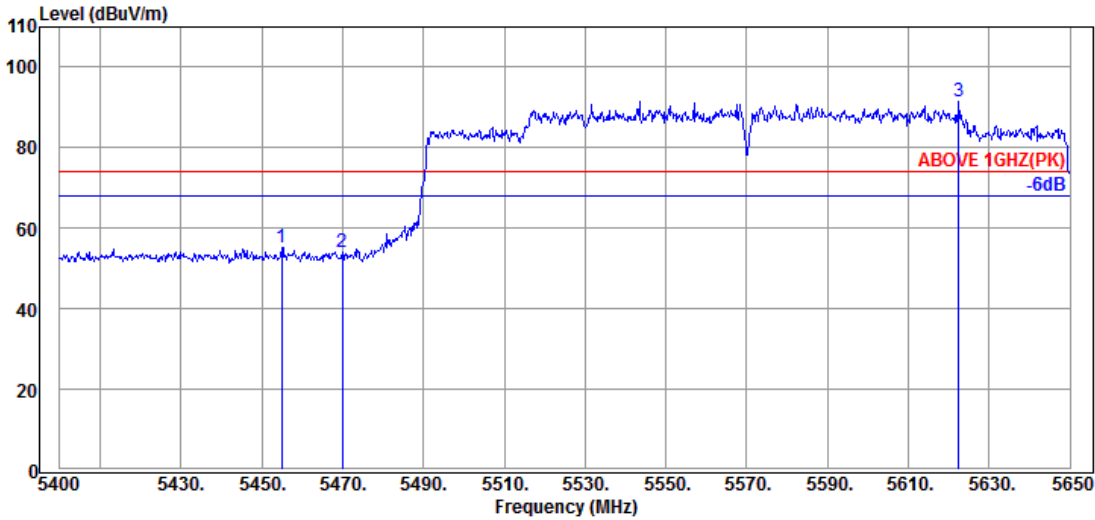

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.000	34.60	8.64	39.17	51.29	55.36	74.00	18.64	Peak
5470.000	34.57	8.65	39.17	50.14	54.19	74.00	19.81	Peak
@ 5622.500	34.60	8.78	39.20	87.25	91.43	---	---	Peak

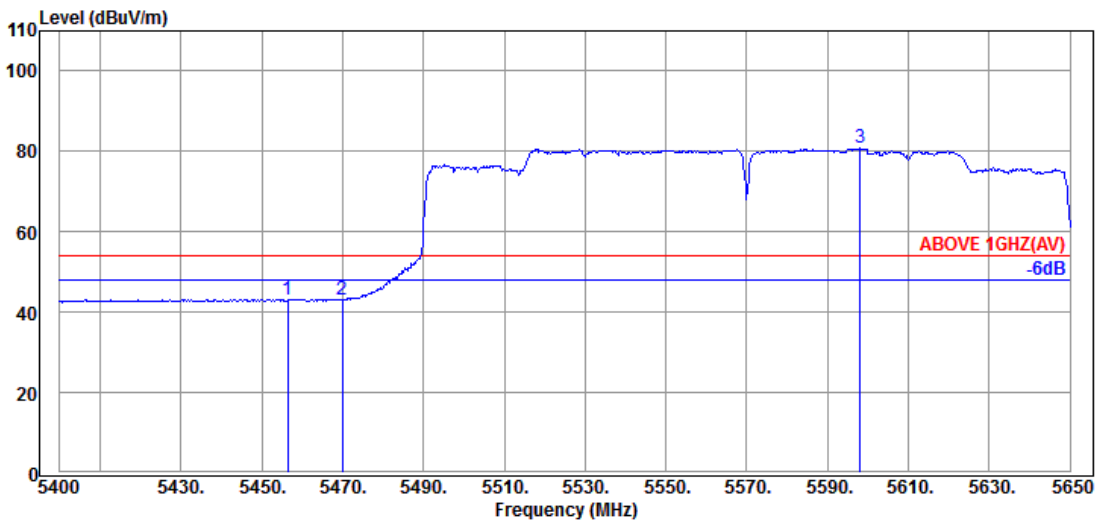


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.500	34.60	8.64	39.17	39.13	43.20	54.00	10.80	Average
5470.000	34.57	8.65	39.17	39.16	43.21	54.00	10.79	Average
@ 5598.000	34.60	8.75	39.20	76.59	80.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

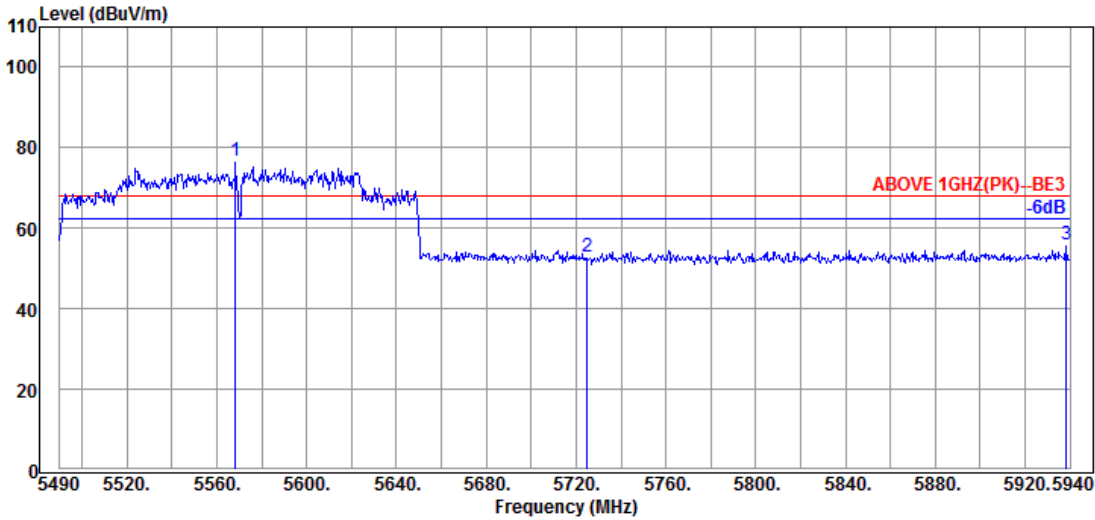

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5568.300	34.60	8.74	39.19	72.43	76.58	---	---	Peak
5724.900	34.50	8.86	39.23	48.94	53.07	68.20	15.13	Peak
5938.200	34.63	9.03	39.29	51.47	55.84	68.20	12.36	Peak

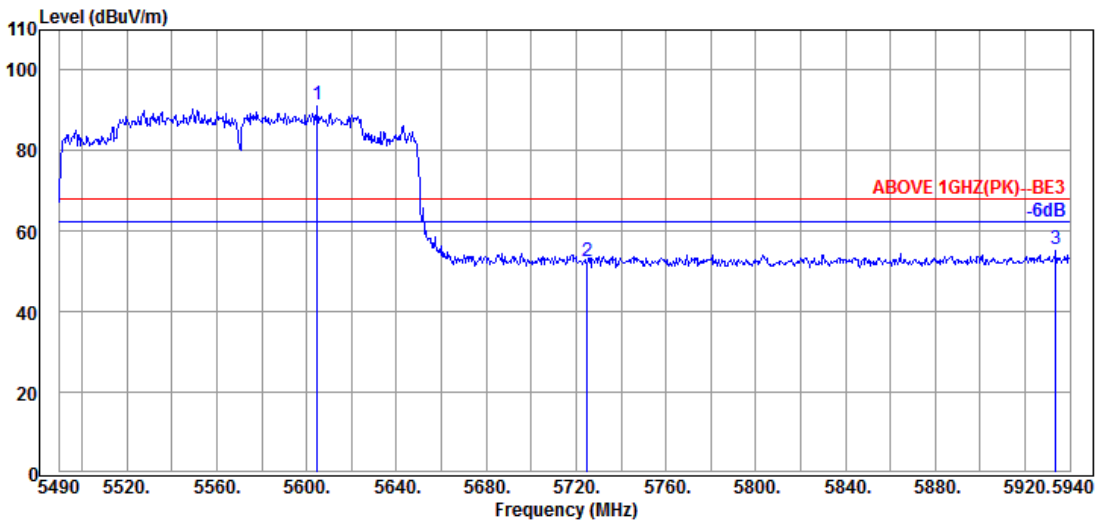


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5604.750	34.60	8.77	39.20	87.40	91.57	---	---	Peak
5724.900	34.50	8.86	39.23	48.55	52.68	68.20	15.52	Peak
5933.700	34.63	9.03	39.28	51.33	55.71	68.20	12.49	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

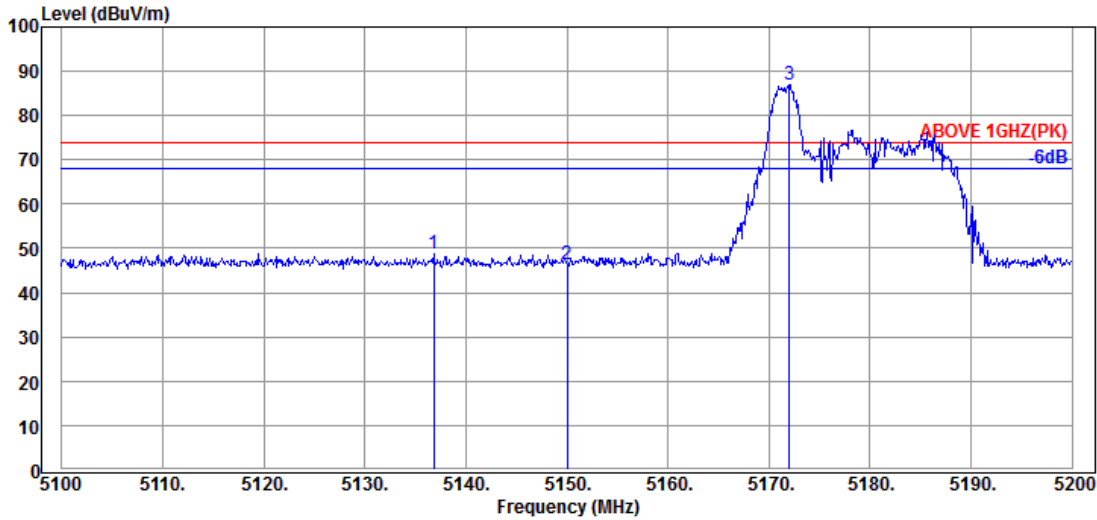

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.800	34.03	8.37	39.21	45.54	48.73	74.00	25.27	Peak
5150.000	34.10	8.39	39.21	42.95	46.23	74.00	27.77	Peak
@ 5172.000	34.23	8.40	39.21	83.44	86.86	---	---	Peak

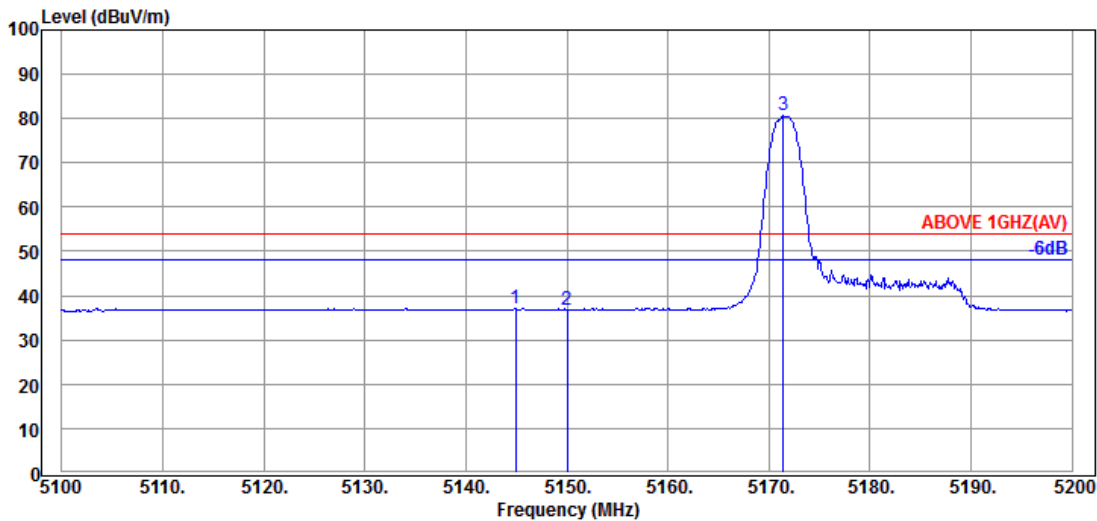


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.900	34.10	8.39	39.21	33.84	37.12	54.00	16.88	Average
5150.000	34.10	8.39	39.21	33.47	36.75	54.00	17.25	Average
@ 5171.400	34.17	8.40	39.21	77.30	80.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

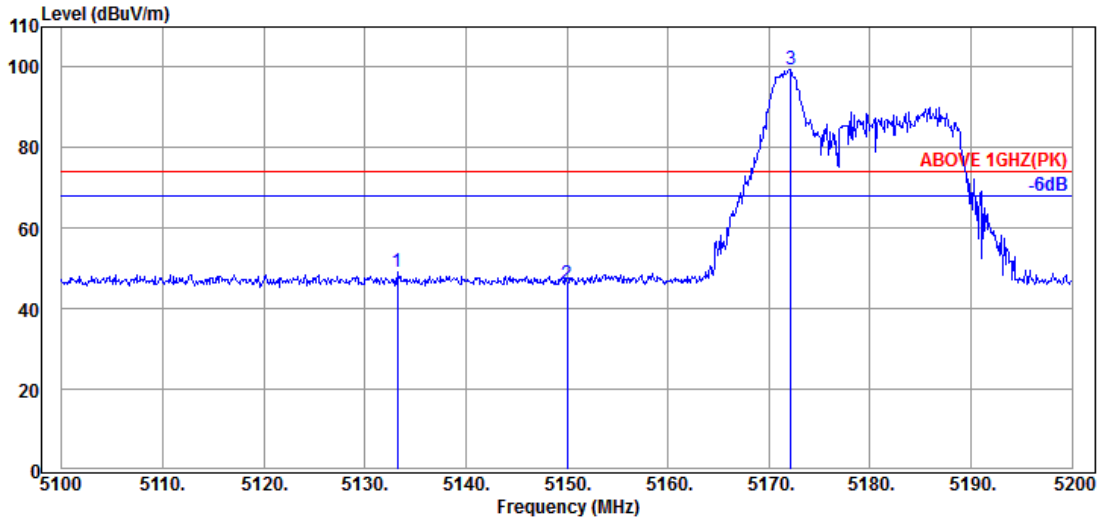

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.200	34.03	8.37	39.21	45.90	49.09	74.00	24.91	Peak
5150.000	34.10	8.39	39.21	42.66	45.94	74.00	28.06	Peak
@ 5172.200	34.23	8.40	39.21	95.94	99.36	---	---	Peak

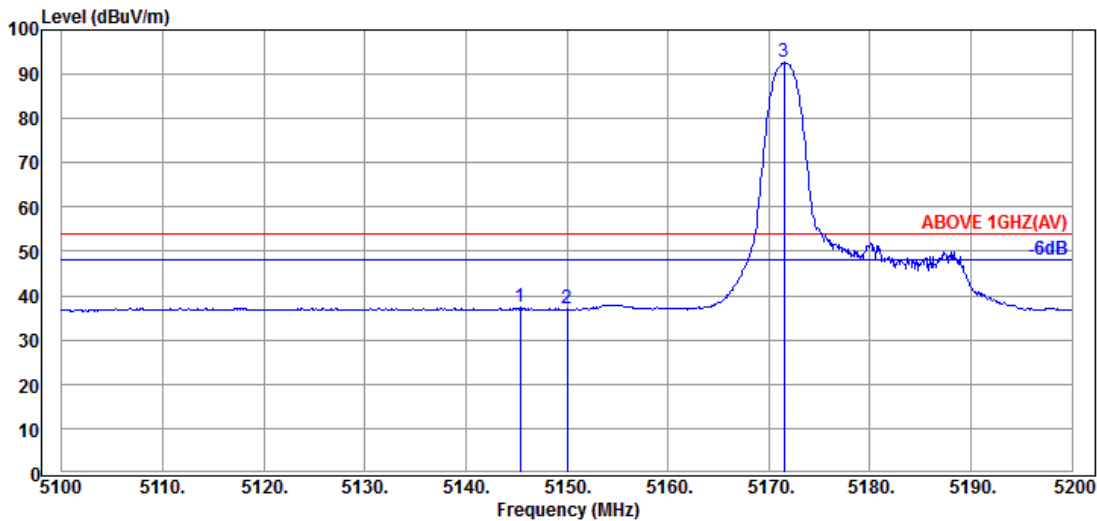


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	34.10	8.39	39.21	34.15	37.43	54.00	16.57	Average
5150.000	34.10	8.39	39.21	33.70	36.98	54.00	17.02	Average
@ 5171.500	34.17	8.40	39.21	89.27	92.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

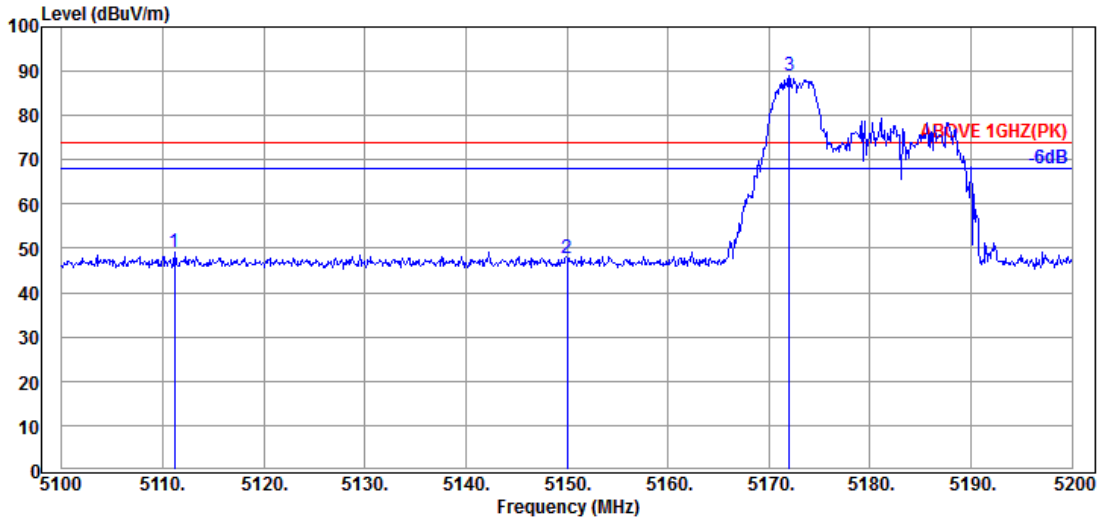

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.200	33.90	8.36	39.22	46.06	49.10	74.00	24.90	Peak
5150.000	34.10	8.39	39.21	44.44	47.72	74.00	26.28	Peak
@ 5172.000	34.23	8.40	39.21	85.45	88.87	---	---	Peak

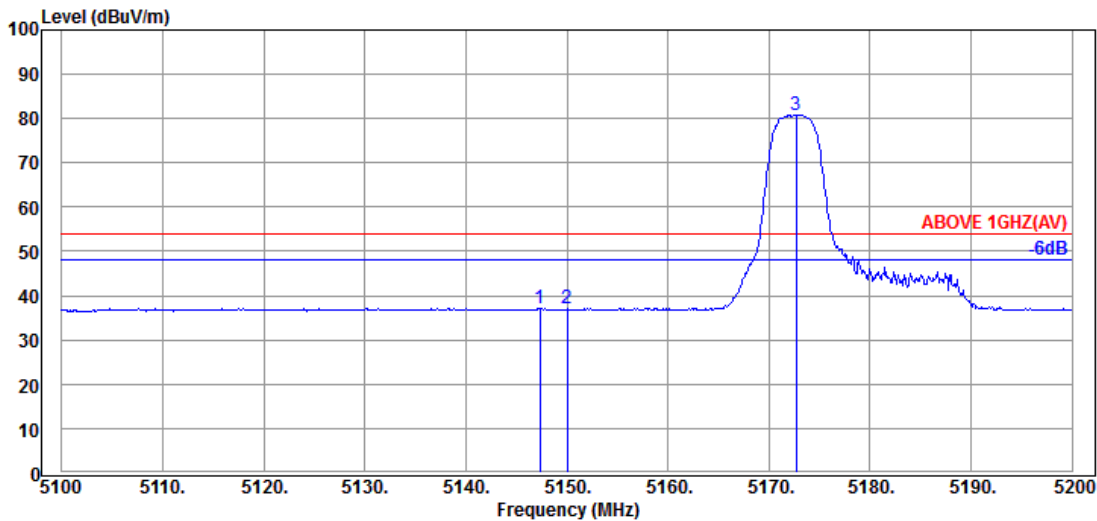


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	34.10	8.39	39.21	33.82	37.10	54.00	16.90	Average
5150.000	34.10	8.39	39.21	33.69	36.97	54.00	17.03	Average
@ 5172.700	34.23	8.40	39.21	77.43	80.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

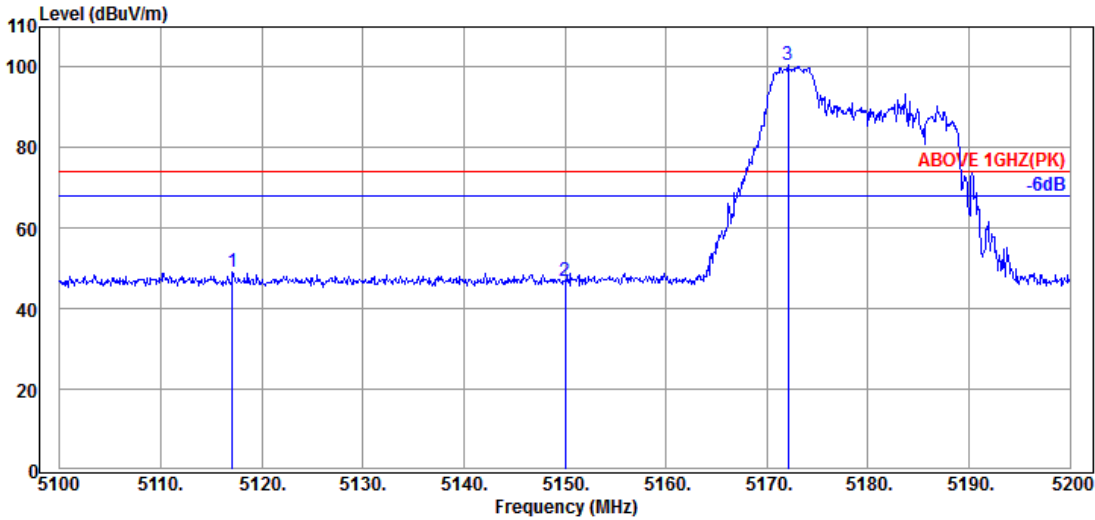

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.100	33.97	8.36	39.22	45.88	48.99	74.00	25.01	Peak
5150.000	34.10	8.39	39.21	43.50	46.78	74.00	27.22	Peak
@ 5172.100	34.23	8.40	39.21	97.28	100.70	---	---	Peak

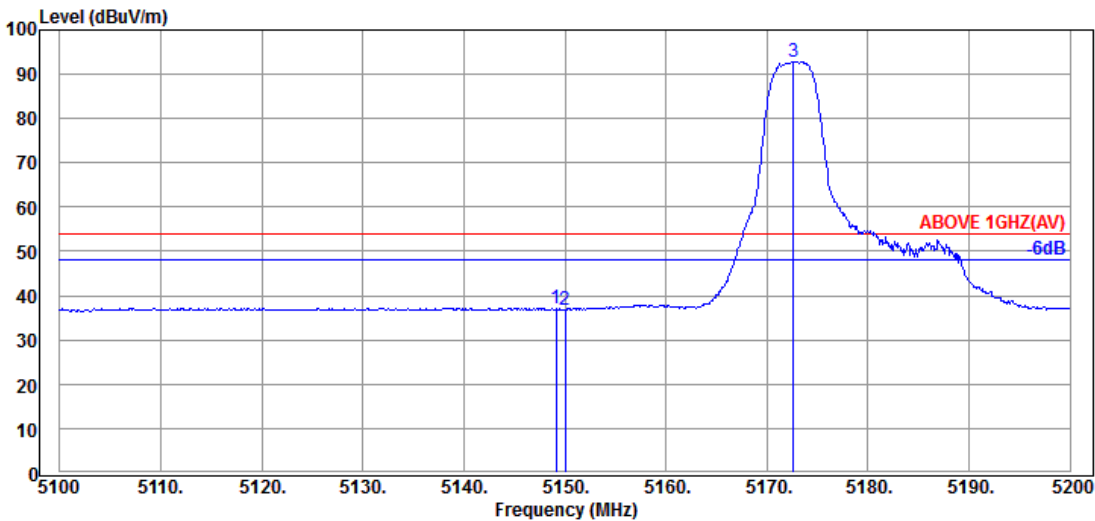


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.10	8.39	39.21	33.88	37.16	54.00	16.84	Average
5150.000	34.10	8.39	39.21	33.60	36.88	54.00	17.12	Average
@ 5172.600	34.23	8.40	39.21	89.41	92.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

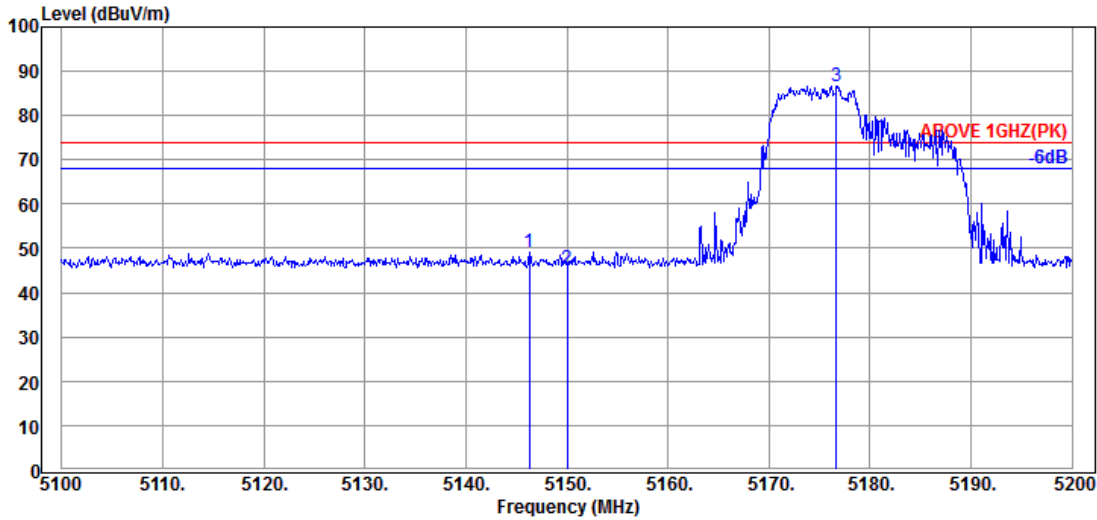

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	34.10	8.39	39.21	45.69	48.97	74.00	25.03	Peak
5150.000	34.10	8.39	39.21	42.19	45.47	74.00	28.53	Peak
@ 5176.700	34.23	8.41	39.21	83.32	86.75	---	---	Peak

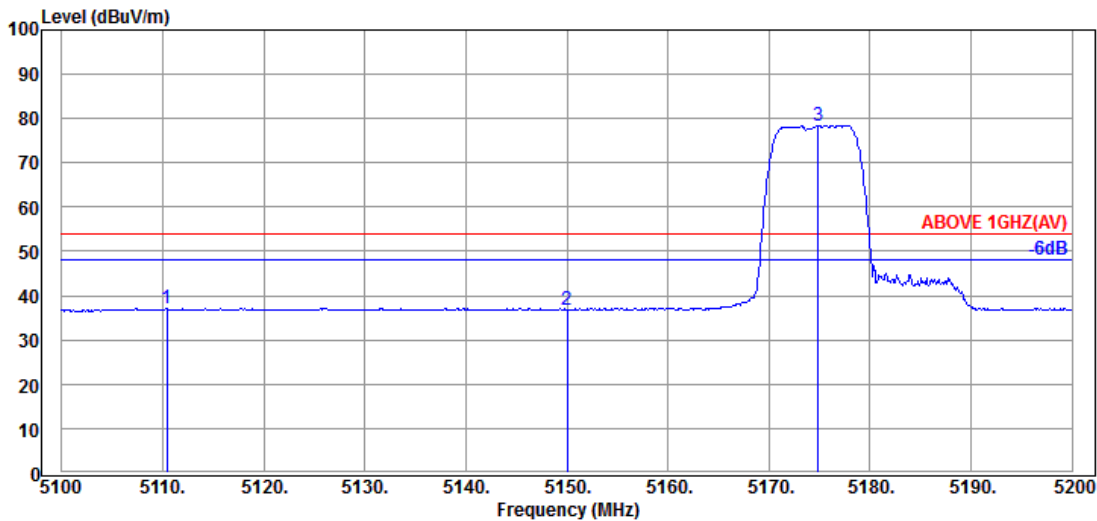


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.400	33.90	8.36	39.22	34.15	37.19	54.00	16.81	Average
5150.000	34.10	8.39	39.21	33.59	36.87	54.00	17.13	Average
@ 5174.900	34.23	8.41	39.21	75.06	78.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

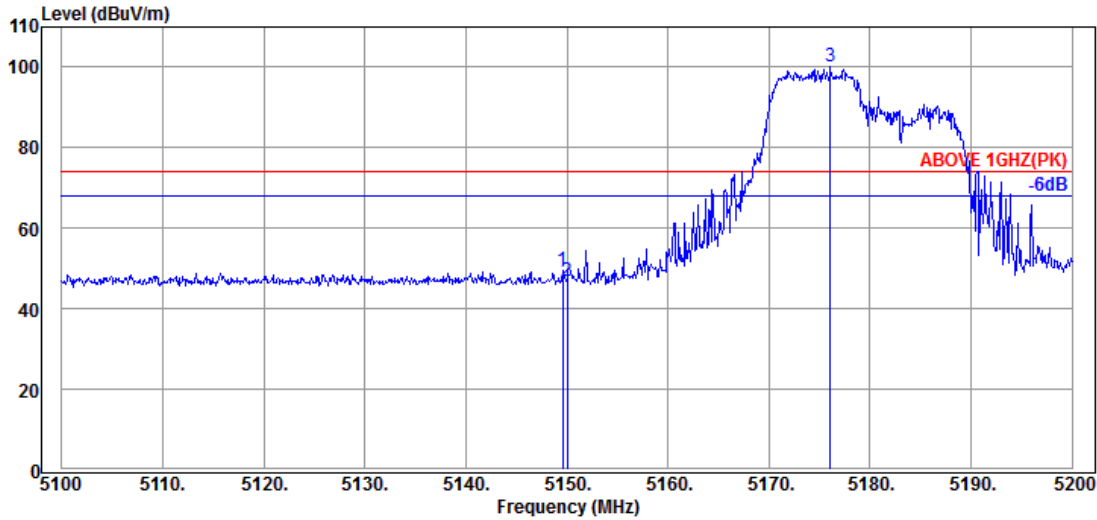

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.10	8.39	39.21	46.38	49.66	74.00	24.34	Peak
5150.000	34.10	8.39	39.21	43.46	46.74	74.00	27.26	Peak
@ 5176.100	34.23	8.41	39.21	96.58	100.01	---	---	Peak

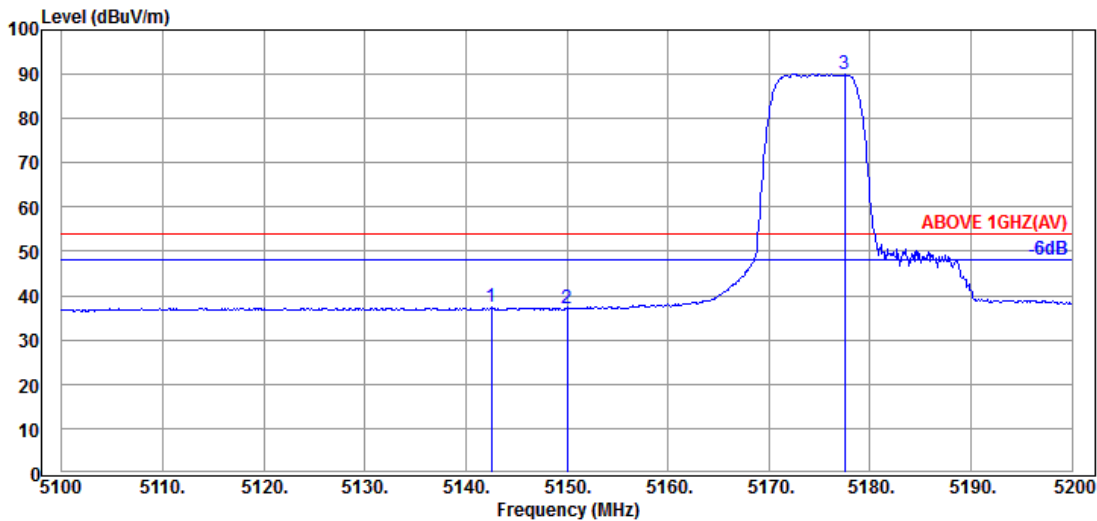


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	34.10	8.39	39.21	34.02	37.30	54.00	16.70	Average
5150.000	34.10	8.39	39.21	33.98	37.26	54.00	16.74	Average
@ 5177.500	34.23	8.41	39.21	86.68	90.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

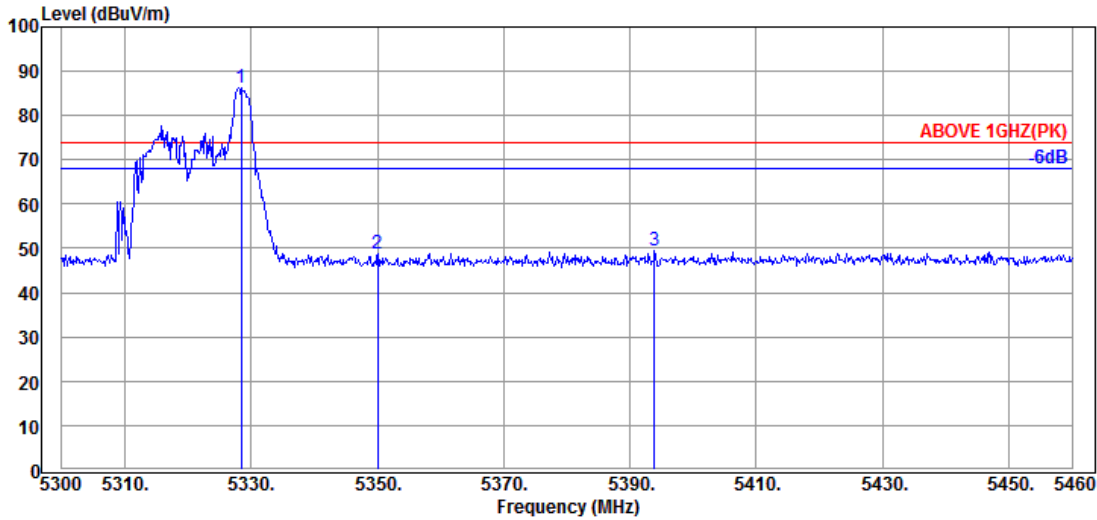

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	8.54	39.19	82.44	86.36	---	---	Peak
5350.080	34.60	8.56	39.19	44.67	48.64	74.00	25.36	Peak
5393.920	34.70	8.58	39.18	45.39	49.49	74.00	24.51	Peak

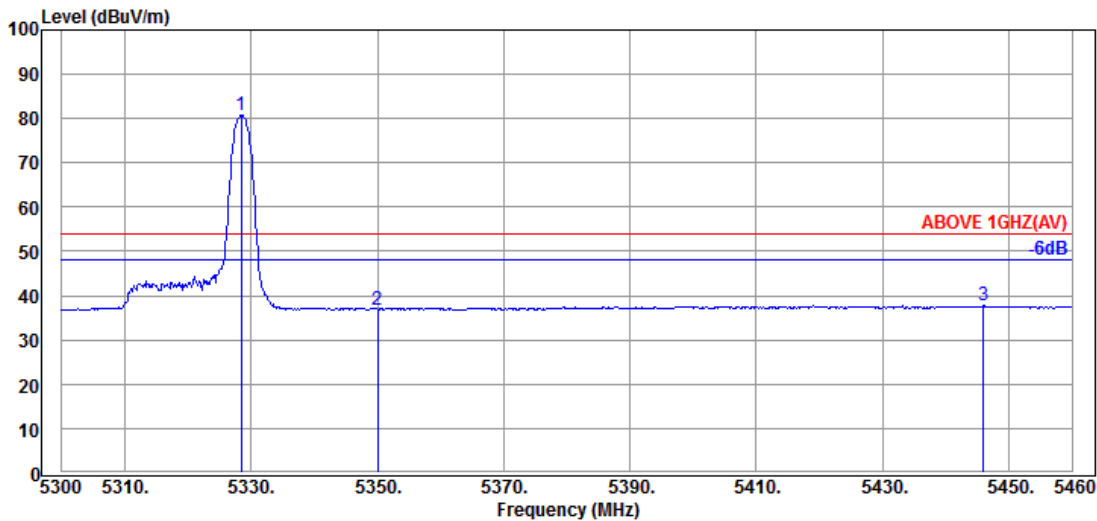


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	8.54	39.19	76.79	80.71	---	---	Average
5350.080	34.60	8.56	39.19	32.89	36.86	54.00	17.14	Average
5445.920	34.62	8.64	39.18	33.70	37.78	54.00	16.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

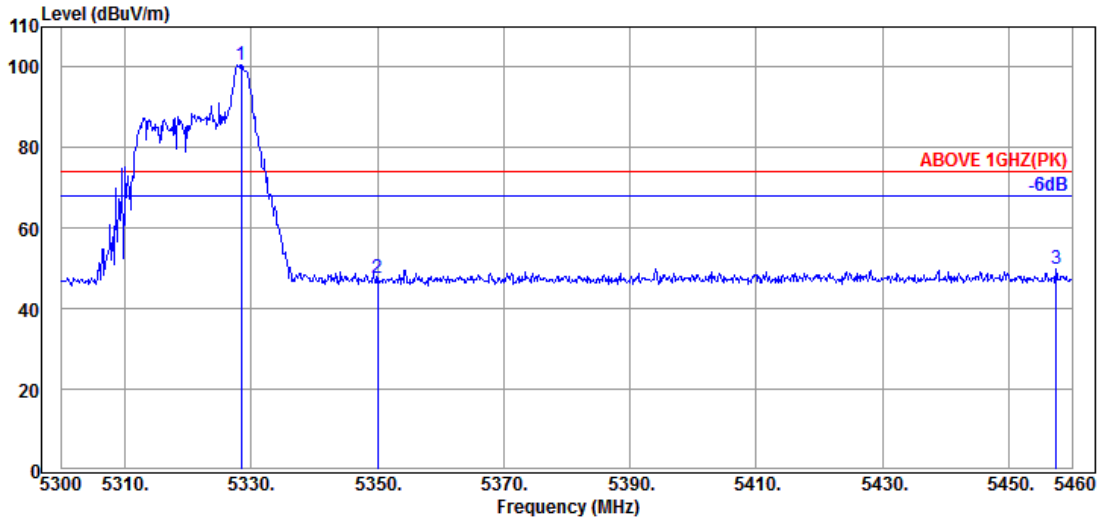

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	8.54	39.19	96.81	100.73	---	---	Peak
5350.080	34.60	8.56	39.19	43.66	47.63	74.00	26.37	Peak
5457.440	34.60	8.64	39.17	45.66	49.73	74.00	24.27	Peak

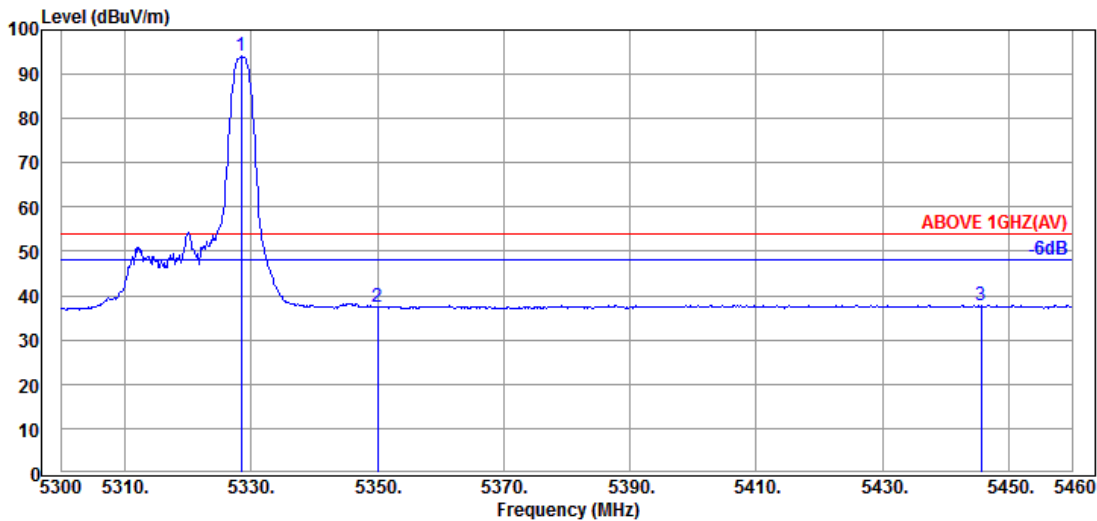


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	8.54	39.19	90.10	94.02	---	---	Average
5350.080	34.60	8.56	39.19	33.38	37.35	54.00	16.65	Average
5445.600	34.62	8.64	39.18	33.79	37.87	54.00	16.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

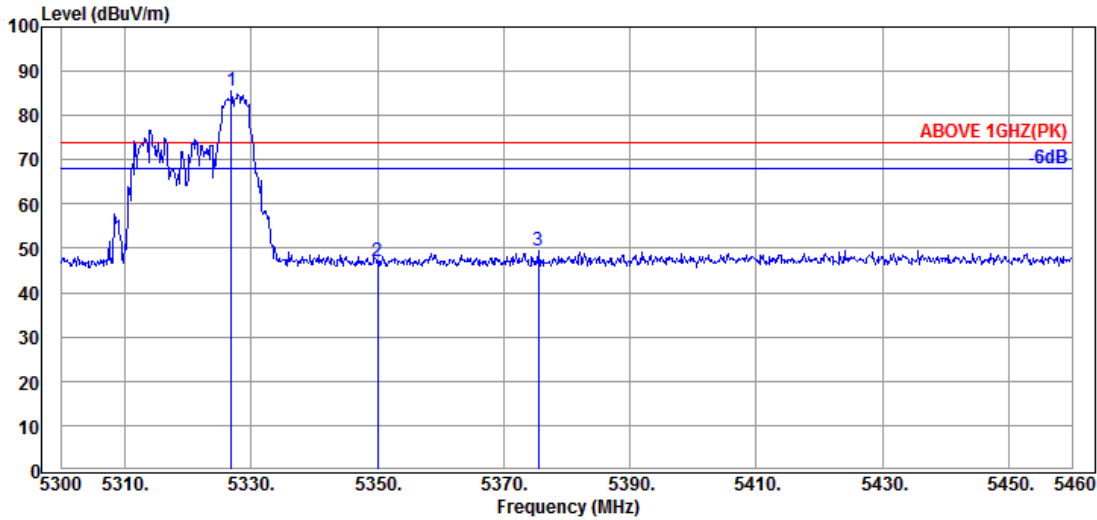

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.880	34.57	8.54	39.19	81.70	85.62	---	---	Peak
5350.080	34.60	8.56	39.19	42.94	46.91	74.00	27.09	Peak
5375.520	34.67	8.57	39.18	45.53	49.59	74.00	24.41	Peak

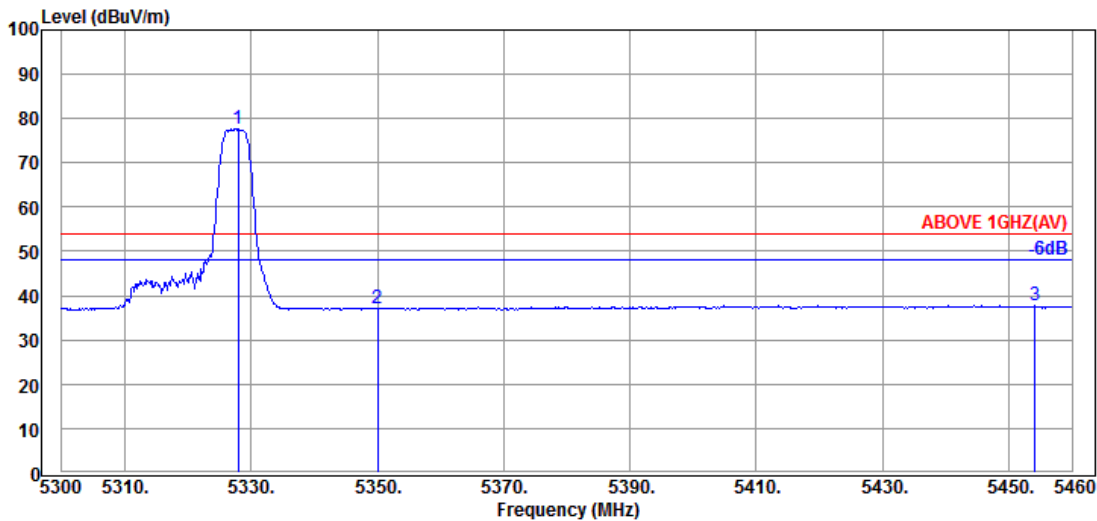


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.57	8.54	39.19	73.83	77.75	---	---	Average
5350.080	34.60	8.56	39.19	33.03	37.00	54.00	17.00	Average
5454.080	34.60	8.64	39.17	33.64	37.71	54.00	16.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

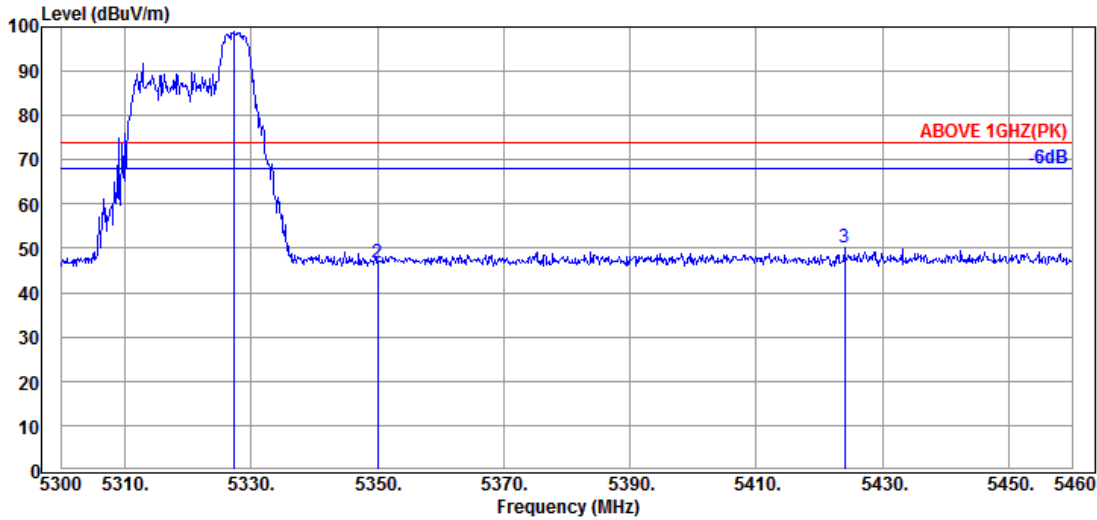

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	34.57	8.54	39.19	95.06	98.98	---	---	Peak
5350.080	34.60	8.56	39.19	42.75	46.72	74.00	27.28	Peak
5424.000	34.65	8.61	39.18	45.99	50.07	74.00	23.93	Peak

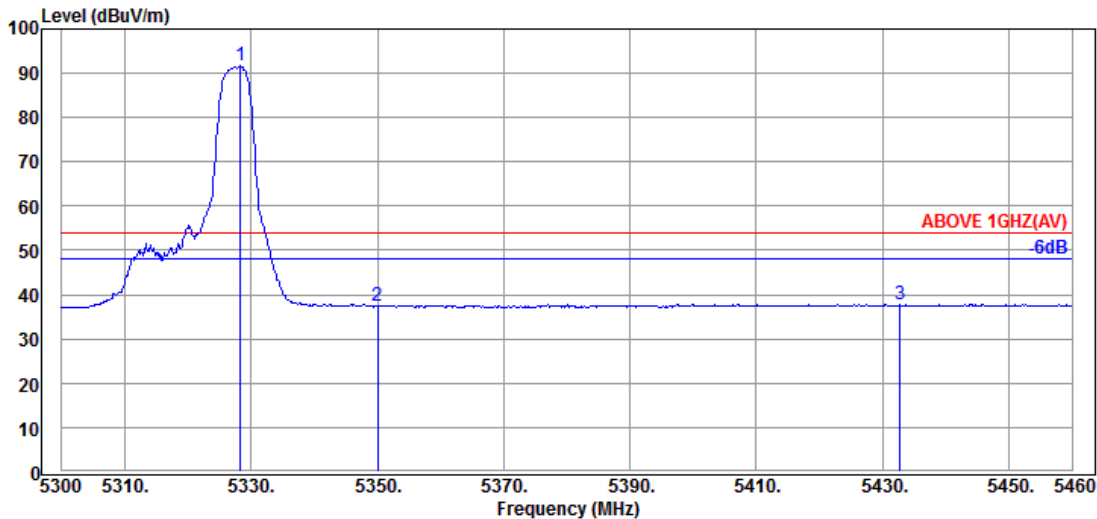


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.57	8.54	39.19	87.86	91.78	---	---	Average
5350.080	34.60	8.56	39.19	33.58	37.55	54.00	16.45	Average
5432.800	34.62	8.63	39.18	33.74	37.81	54.00	16.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

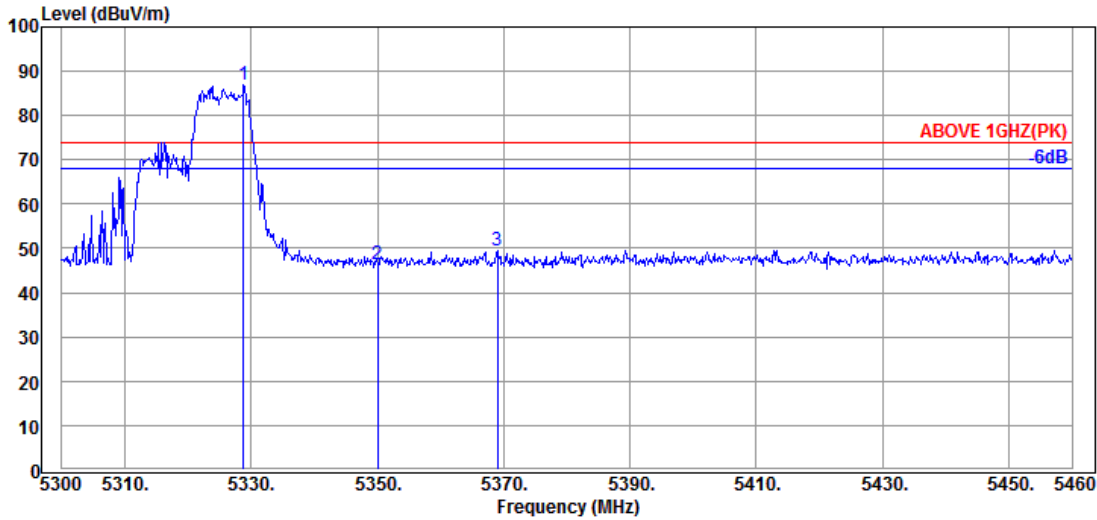

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	34.57	8.54	39.19	82.95	86.87	---	---	Peak
5350.080	34.60	8.56	39.19	42.42	46.39	74.00	27.61	Peak
5368.960	34.63	8.57	39.18	45.49	49.51	74.00	24.49	Peak

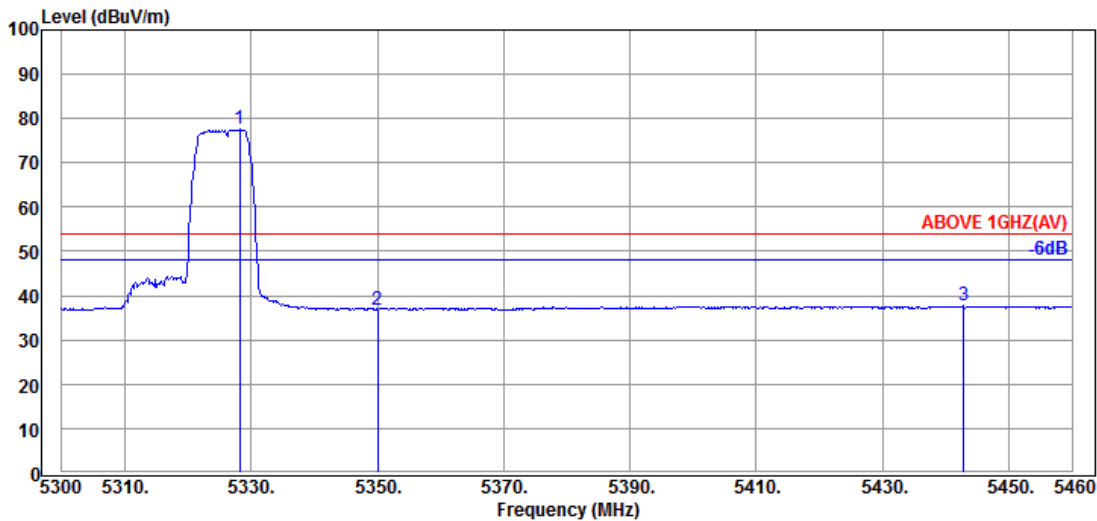


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	8.54	39.19	73.62	77.54	---	---	Average
5350.080	34.60	8.56	39.19	32.94	36.91	54.00	17.09	Average
5442.880	34.62	8.63	39.18	33.59	37.66	54.00	16.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

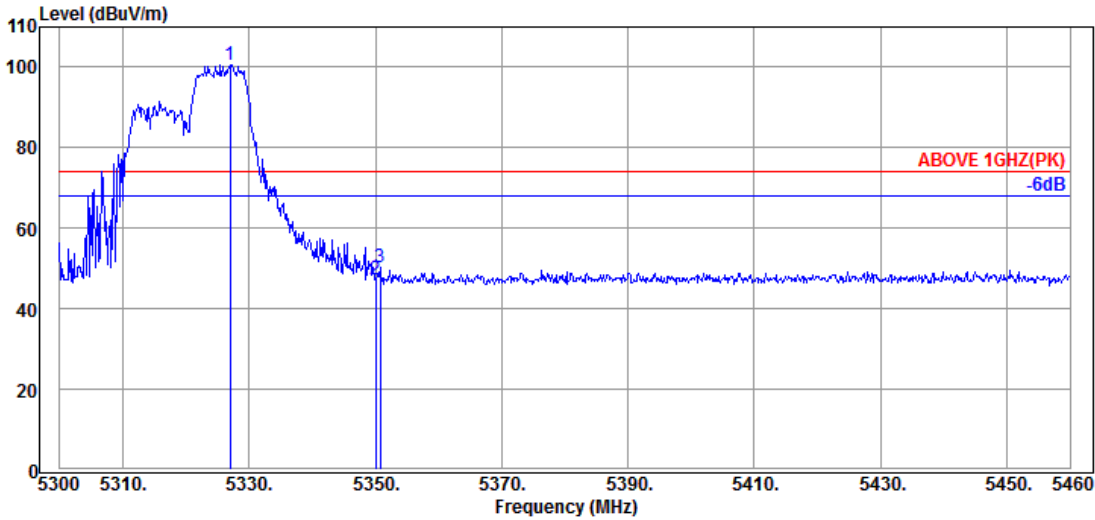

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.040	34.57	8.54	39.19	96.79	100.71	---	---	Peak
5350.080	34.60	8.56	39.19	43.21	47.18	74.00	26.82	Peak
5350.720	34.60	8.56	39.19	46.16	50.13	74.00	23.87	Peak

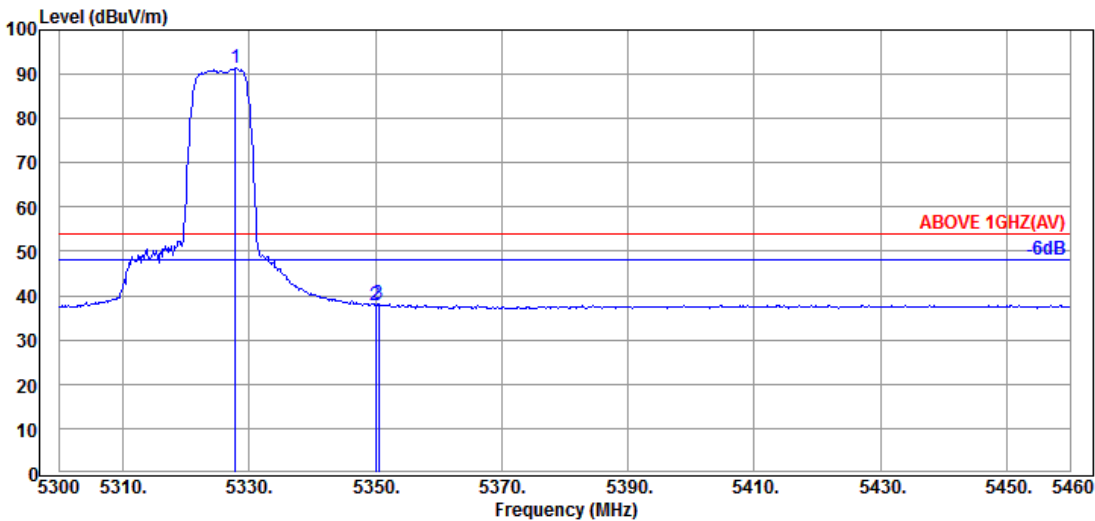


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.57	8.54	39.19	87.38	91.30	---	---	Average
5350.080	34.60	8.56	39.19	33.91	37.88	54.00	16.12	Average
5350.560	34.60	8.56	39.19	34.17	38.14	54.00	15.86	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

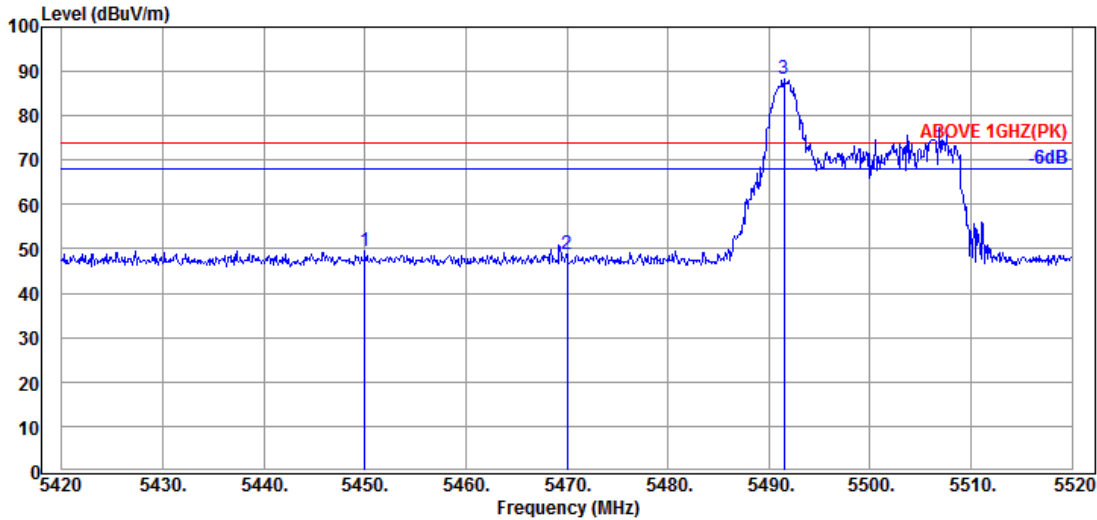

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.000	34.60	8.64	39.18	45.51	49.57	74.00	24.43	Peak
5470.000	34.57	8.65	39.17	44.86	48.91	74.00	25.09	Peak
@ 5491.500	34.53	8.67	39.17	84.35	88.38	---	---	Peak

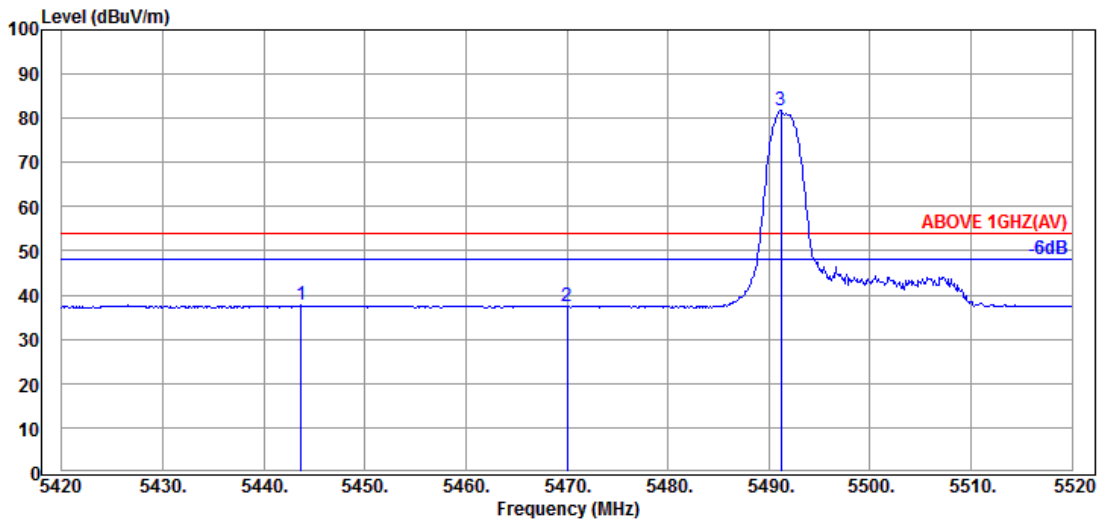


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.700	34.62	8.63	39.18	33.71	37.78	54.00	16.22	Average
5470.000	34.57	8.65	39.17	33.38	37.43	54.00	16.57	Average
@ 5491.200	34.53	8.67	39.17	77.78	81.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

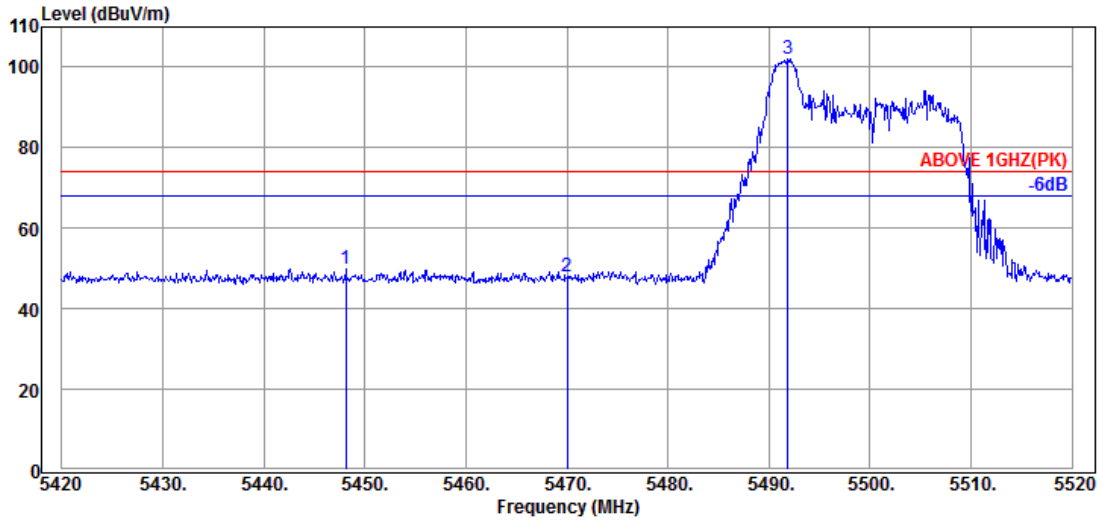

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.100	34.60	8.64	39.18	45.89	49.95	74.00	24.05	Peak
5470.000	34.57	8.65	39.17	43.89	47.94	74.00	26.06	Peak
@ 5491.900	34.53	8.67	39.17	97.97	102.00	---	---	Peak

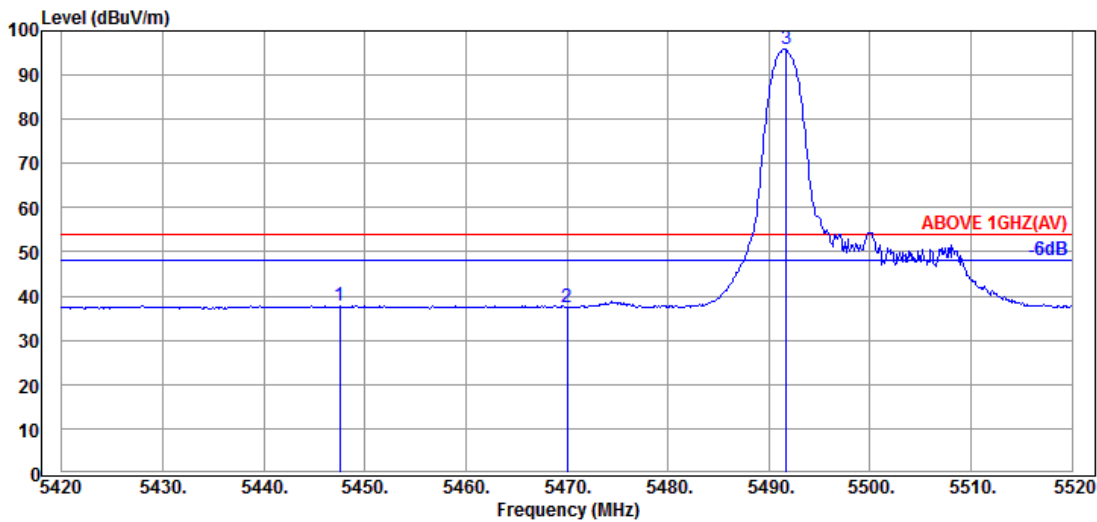


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.500	34.62	8.64	39.18	33.69	37.77	54.00	16.23	Average
5470.000	34.57	8.65	39.17	33.41	37.46	54.00	16.54	Average
@ 5491.700	34.53	8.67	39.17	91.72	95.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

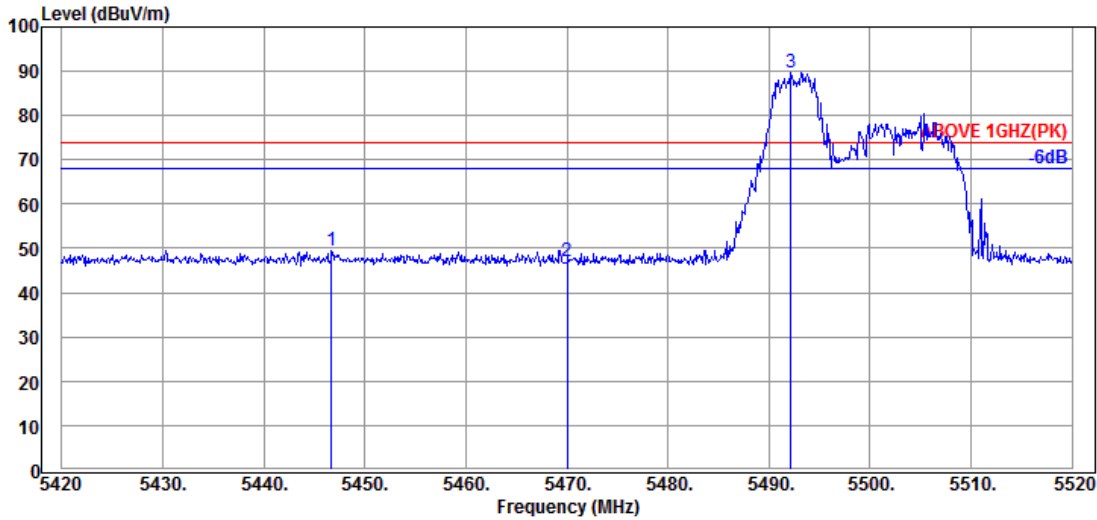

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.700	34.62	8.64	39.18	45.54	49.62	74.00	24.38	Peak
5470.000	34.57	8.65	39.17	43.02	47.07	74.00	26.93	Peak
@ 5492.200	34.53	8.67	39.17	85.77	89.80	---	---	Peak

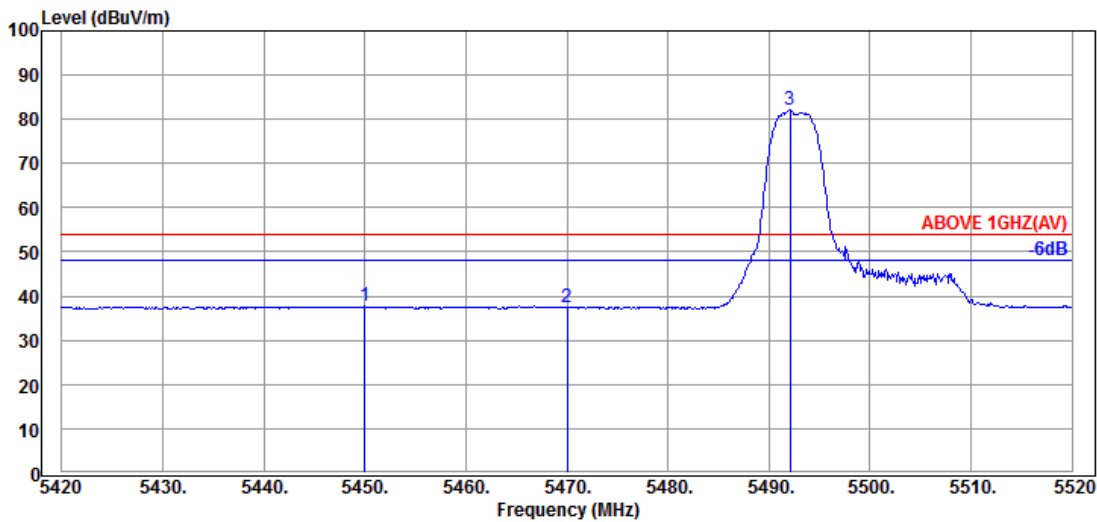


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.000	34.60	8.64	39.18	33.63	37.69	54.00	16.31	Average
5470.000	34.57	8.65	39.17	33.35	37.40	54.00	16.60	Average
@ 5492.100	34.53	8.67	39.17	78.00	82.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

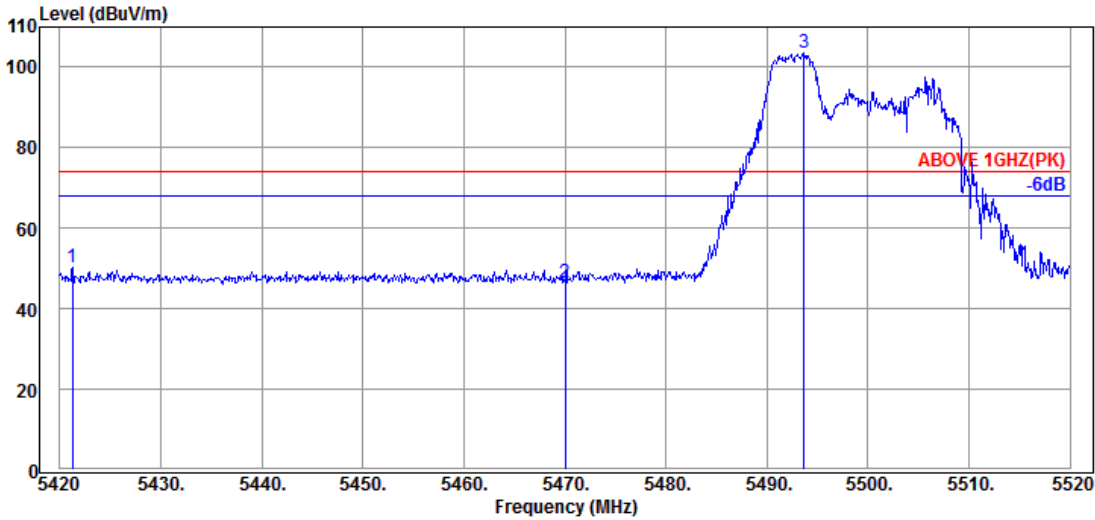

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.300	34.65	8.61	39.18	46.30	50.38	74.00	23.62	Peak
5470.000	34.57	8.65	39.17	42.27	46.32	74.00	27.68	Peak
@ 5493.700	34.53	8.67	39.17	99.61	103.64	---	---	Peak

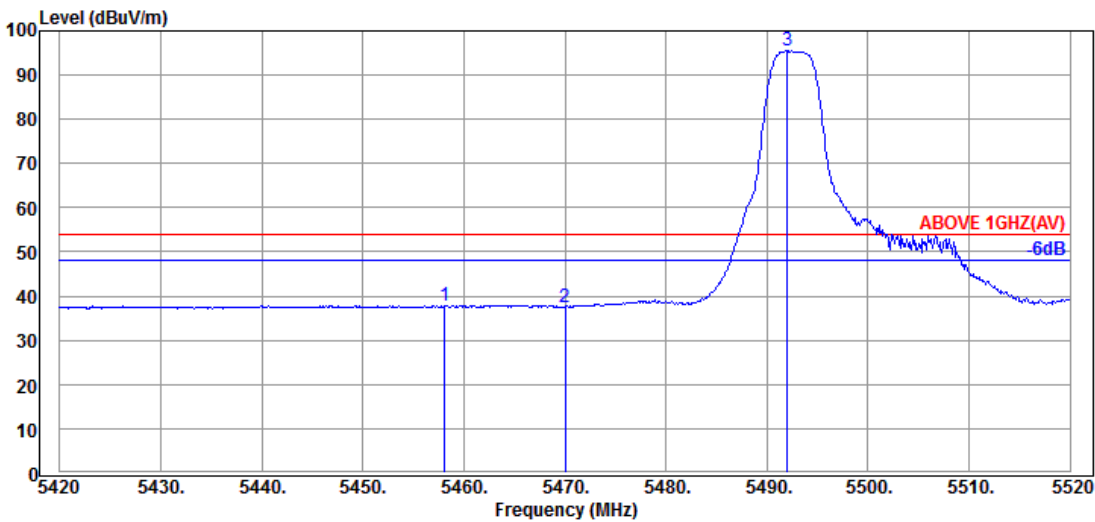


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.100	34.60	8.64	39.17	33.76	37.83	54.00	16.17	Average
5470.000	34.57	8.65	39.17	33.49	37.54	54.00	16.46	Average
@ 5492.000	34.53	8.67	39.17	91.59	95.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

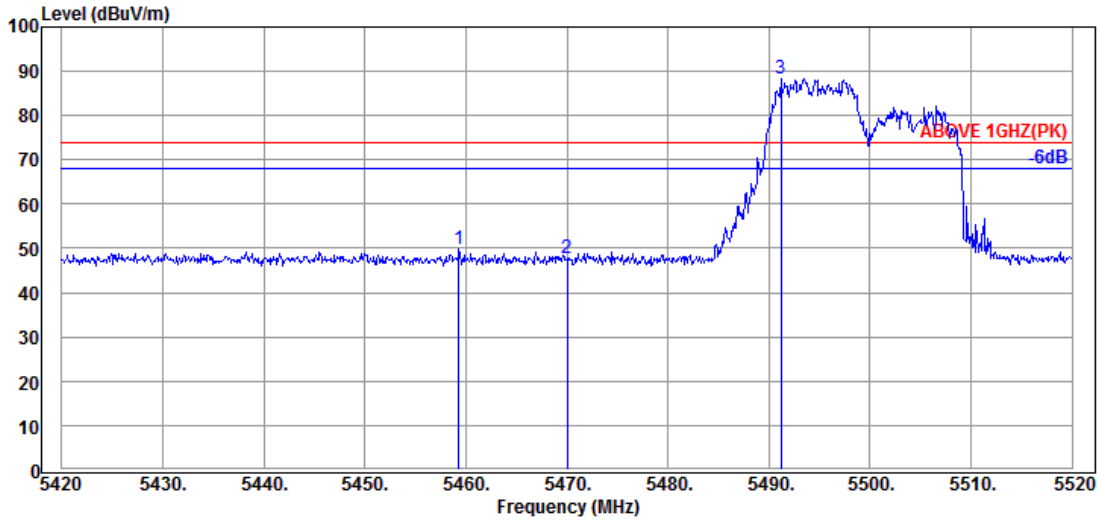

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.60	8.64	39.17	45.59	49.66	74.00	24.34	Peak
5470.000	34.57	8.65	39.17	43.68	47.73	74.00	26.27	Peak
@ 5491.200	34.53	8.67	39.17	84.36	88.39	---	---	Peak

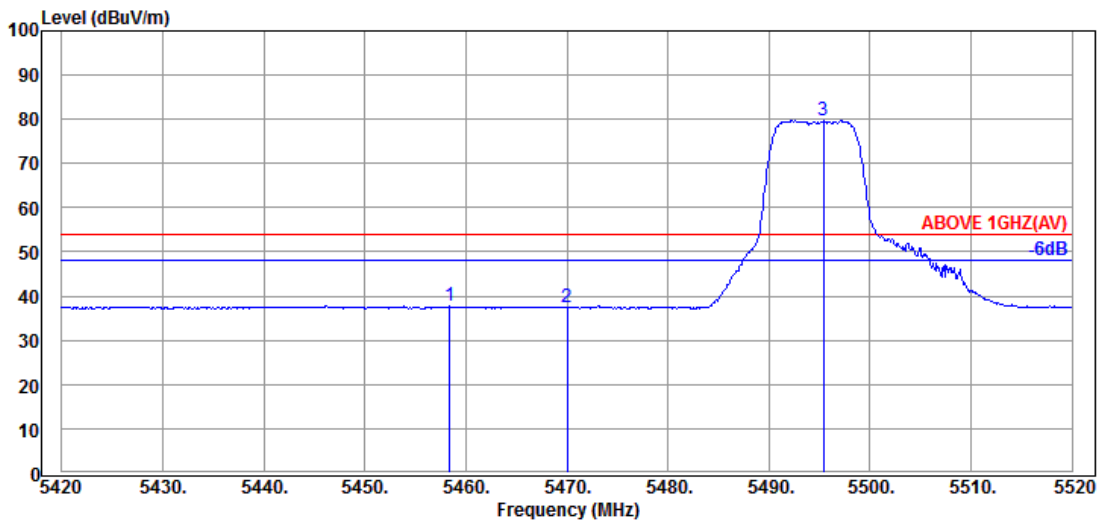


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.400	34.60	8.64	39.17	33.69	37.76	54.00	16.24	Average
5470.000	34.57	8.65	39.17	33.43	37.48	54.00	16.52	Average
@ 5495.400	34.50	8.67	39.17	75.73	79.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

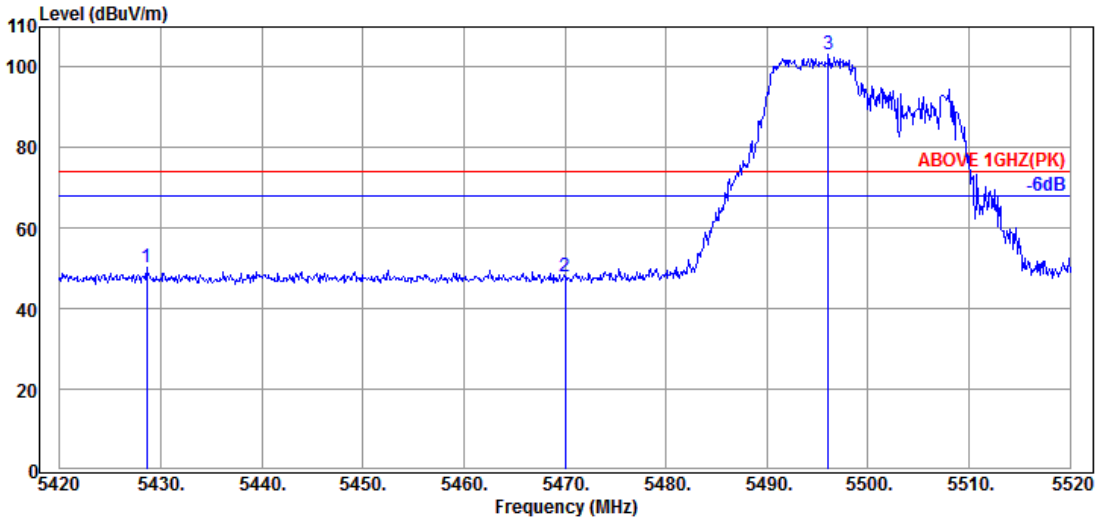

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.600	34.65	8.63	39.18	46.21	50.31	74.00	23.69	Peak
5470.000	34.57	8.65	39.17	43.85	47.90	74.00	26.10	Peak
@ 5496.100	34.50	8.67	39.17	99.14	103.14	---	---	Peak

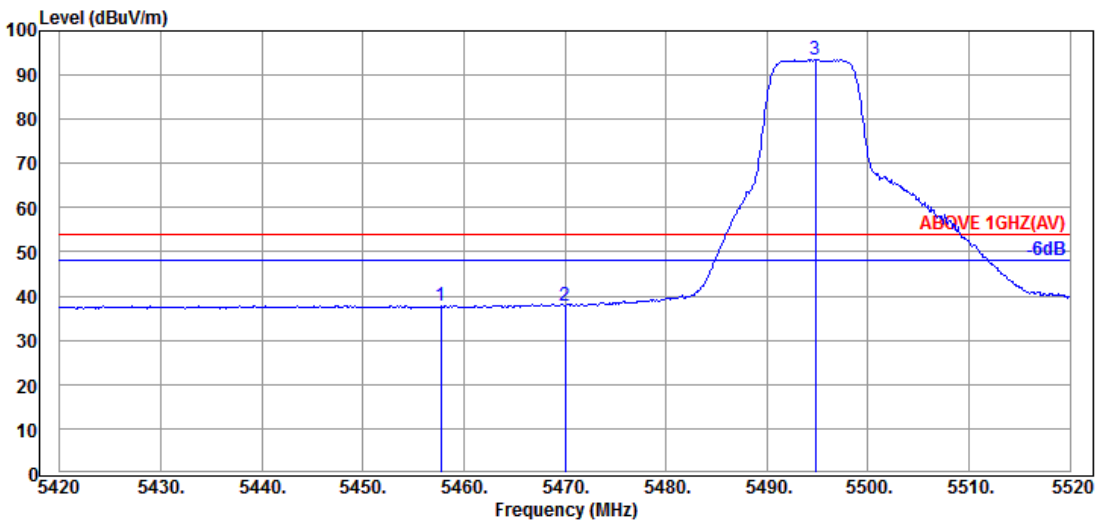

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.700	34.60	8.64	39.17	33.75	37.82	54.00	16.18	Average
5470.000	34.57	8.65	39.17	33.83	37.88	54.00	16.12	Average
@ 5494.800	34.53	8.67	39.17	89.56	93.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/8	Frequency	TX 5700MHz

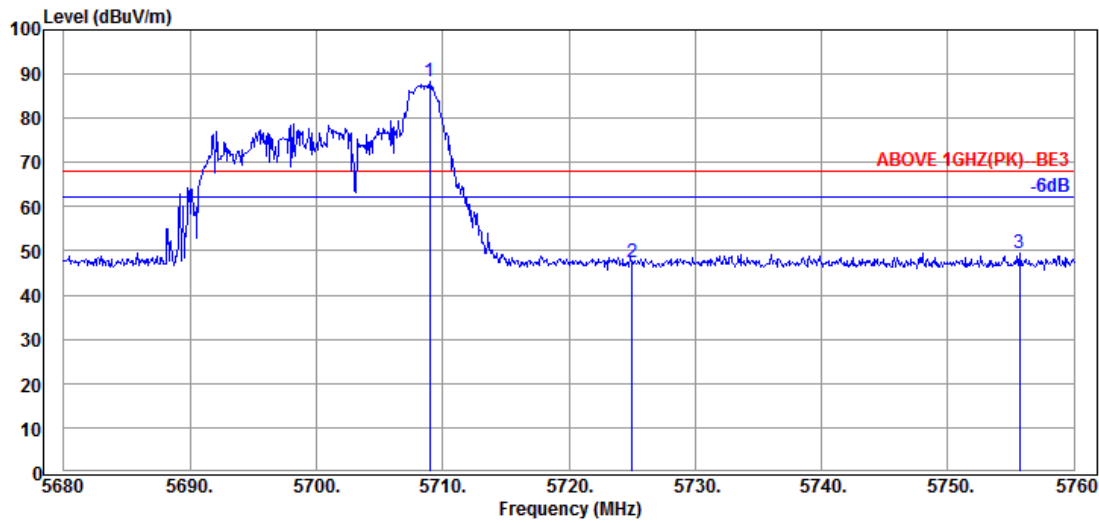

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.960	34.50	8.85	39.23	84.03	88.15	---	---	Peak
5725.040	34.50	8.86	39.23	43.39	47.52	68.20	20.68	Peak
5755.680	34.47	8.89	39.24	45.43	49.55	68.20	18.65	Peak

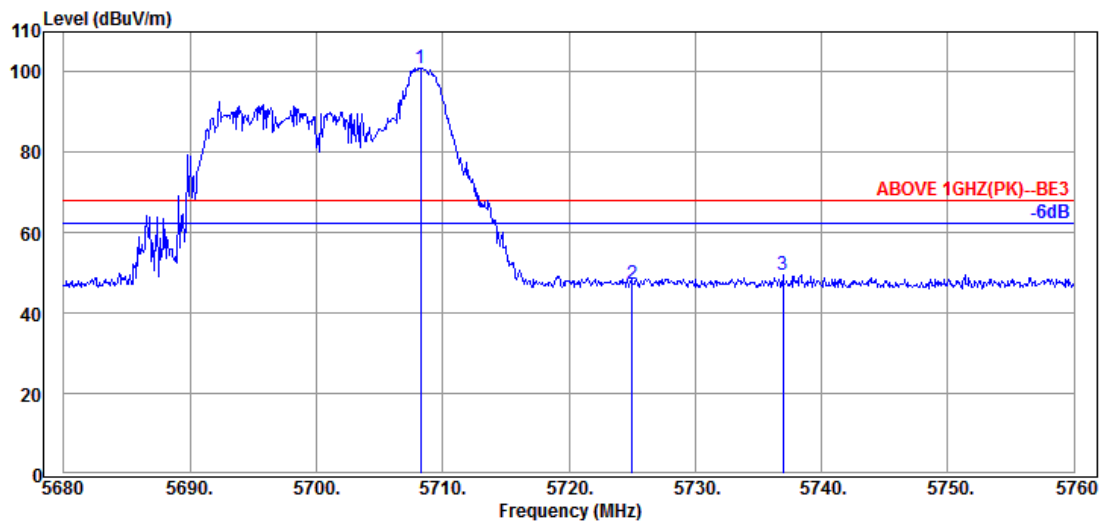


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.240	34.50	8.85	39.23	96.96	101.08	---	---	Peak
5725.040	34.50	8.86	39.23	43.15	47.28	68.20	20.92	Peak
5736.960	34.50	8.88	39.23	45.42	49.57	68.20	18.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/40	Frequency	TX 5700MHz

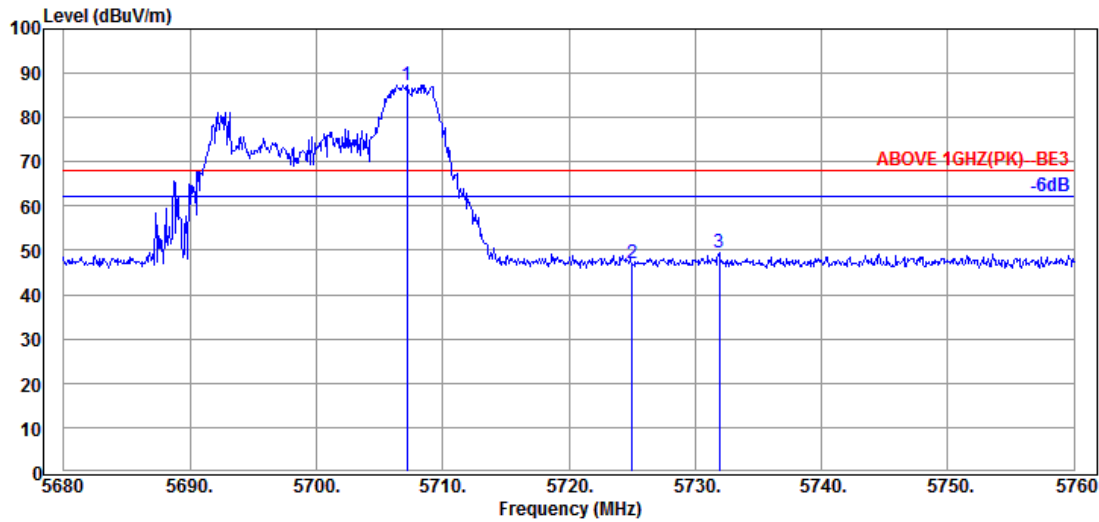

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.200	34.50	8.85	39.22	83.25	87.38	---	---	Peak
5725.040	34.50	8.86	39.23	43.05	47.18	68.20	21.02	Peak
5731.920	34.50	8.86	39.23	45.38	49.51	68.20	18.69	Peak

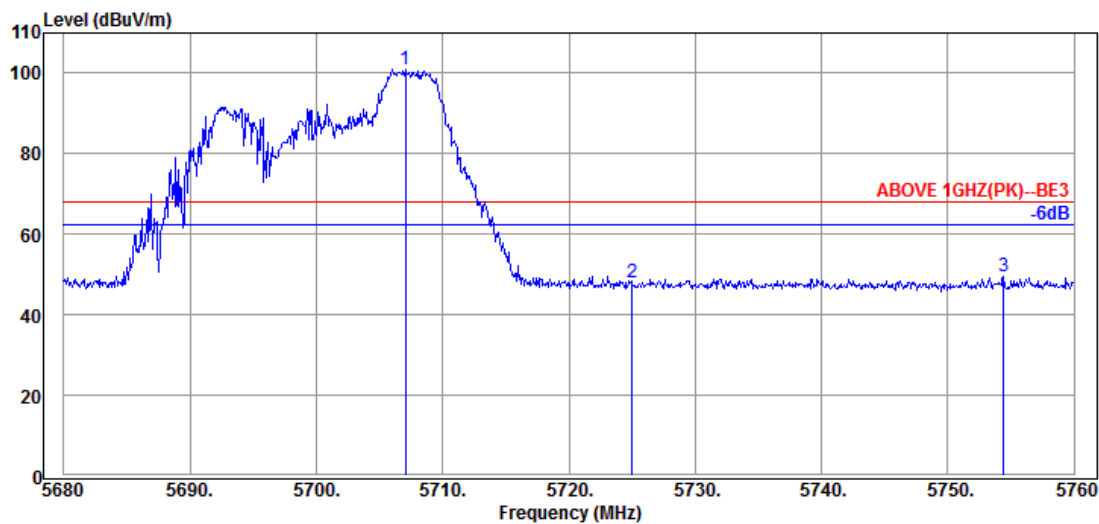


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.040	34.50	8.85	39.22	96.89	101.02	---	---	Peak
5725.040	34.50	8.86	39.23	43.79	47.92	68.20	20.28	Peak
5754.400	34.50	8.89	39.24	45.23	49.38	68.20	18.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/54	Frequency	TX 5700MHz

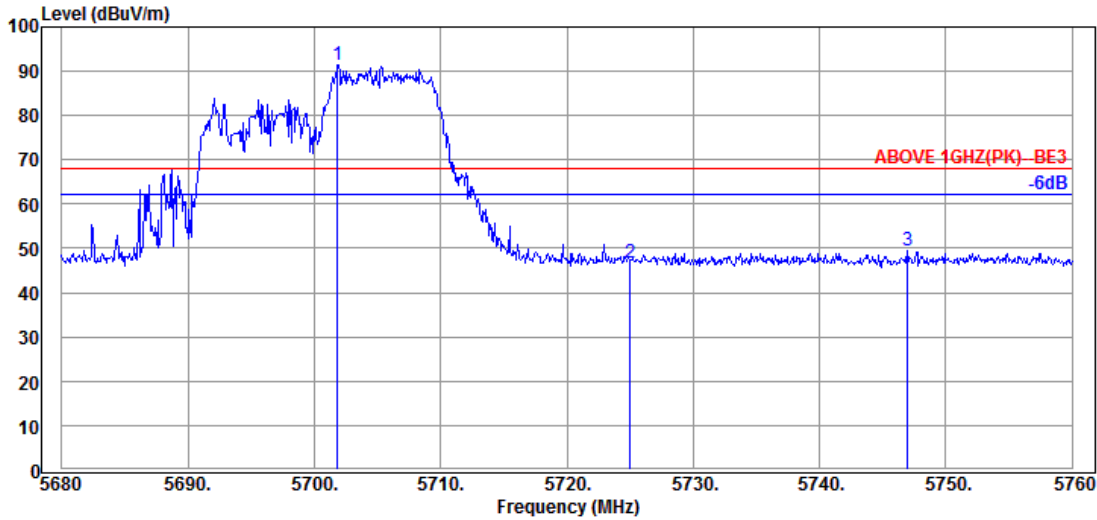

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.840	34.50	8.85	39.22	87.41	91.54	---	---	Peak
5725.040	34.50	8.86	39.23	42.58	46.71	68.20	21.49	Peak
5746.960	34.50	8.88	39.24	45.19	49.33	68.20	18.87	Peak

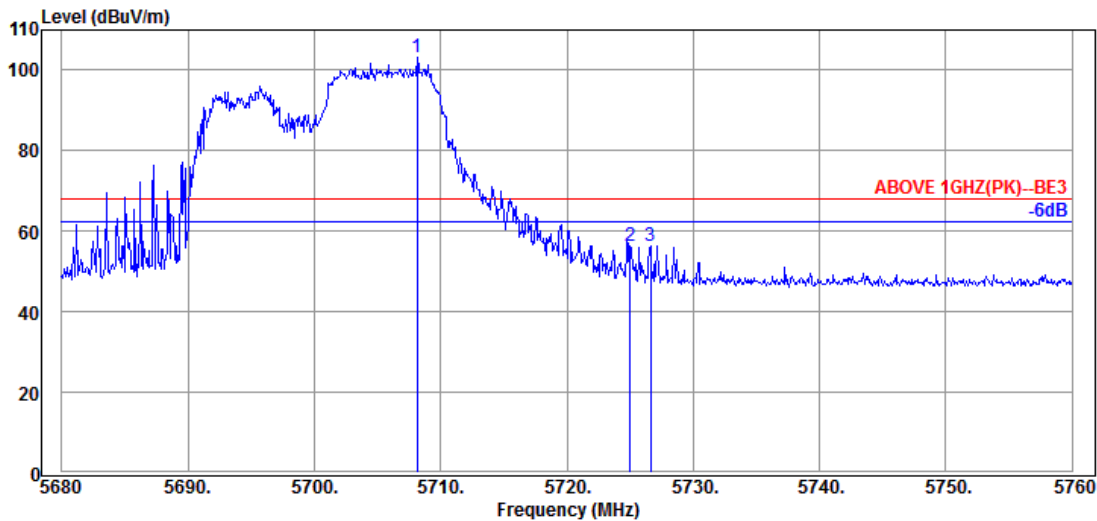

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.160	34.50	8.85	39.23	98.96	103.08	---	---	Peak
5725.040	34.50	8.86	39.23	52.01	56.14	68.20	12.06	Peak
5726.640	34.50	8.86	39.23	52.21	56.34	68.20	11.86	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

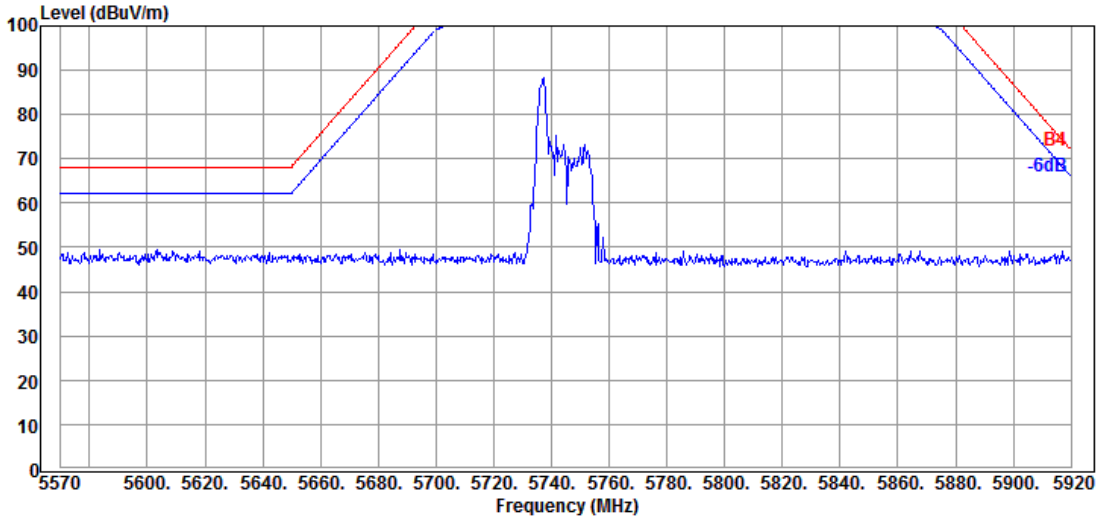


Antenna at Vertical Polarization

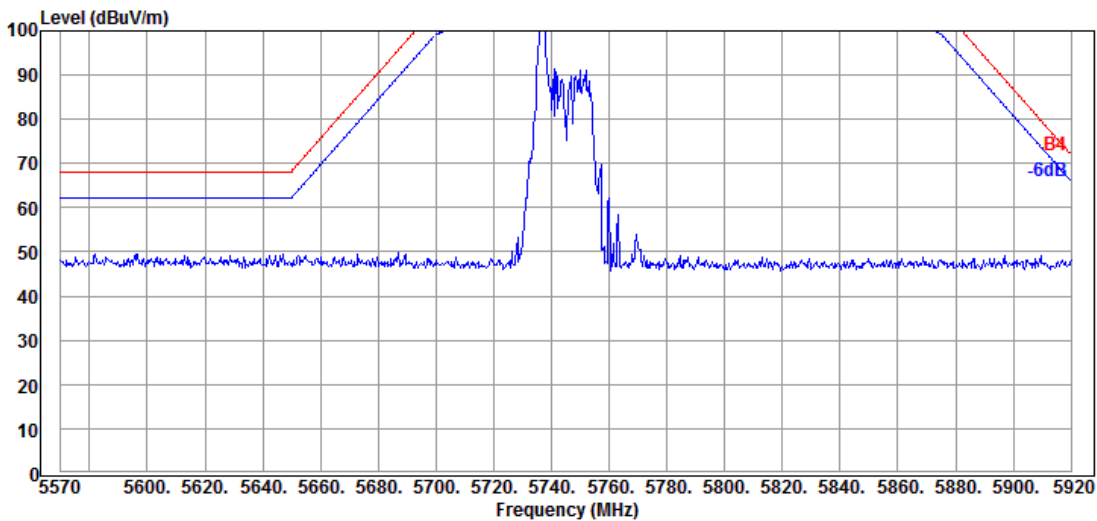


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

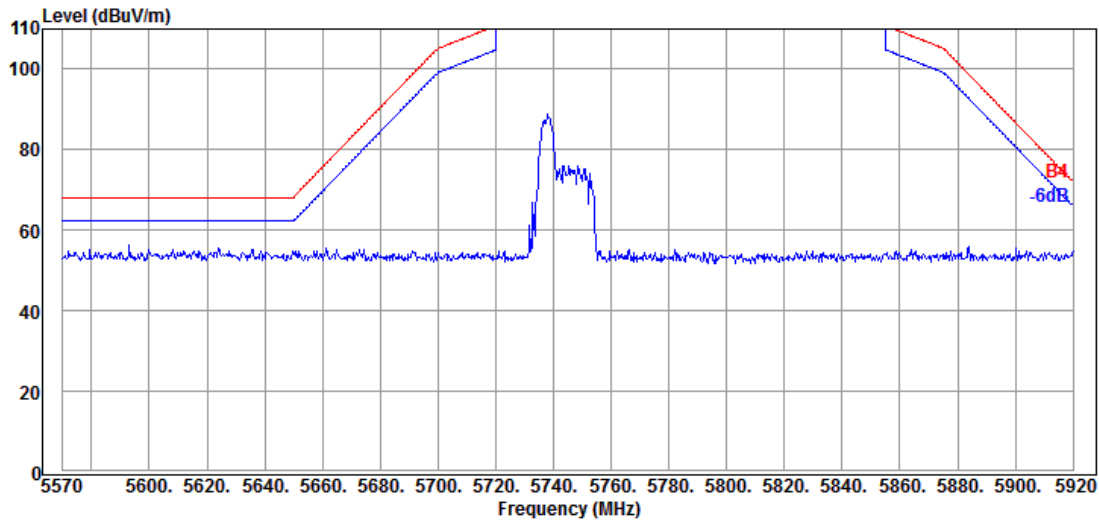


Antenna at Vertical Polarization

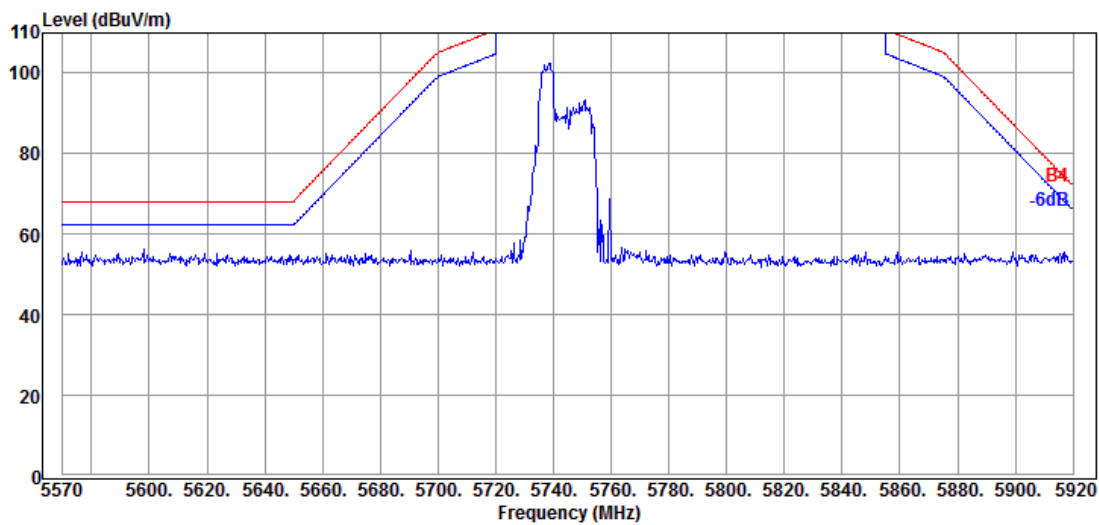


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

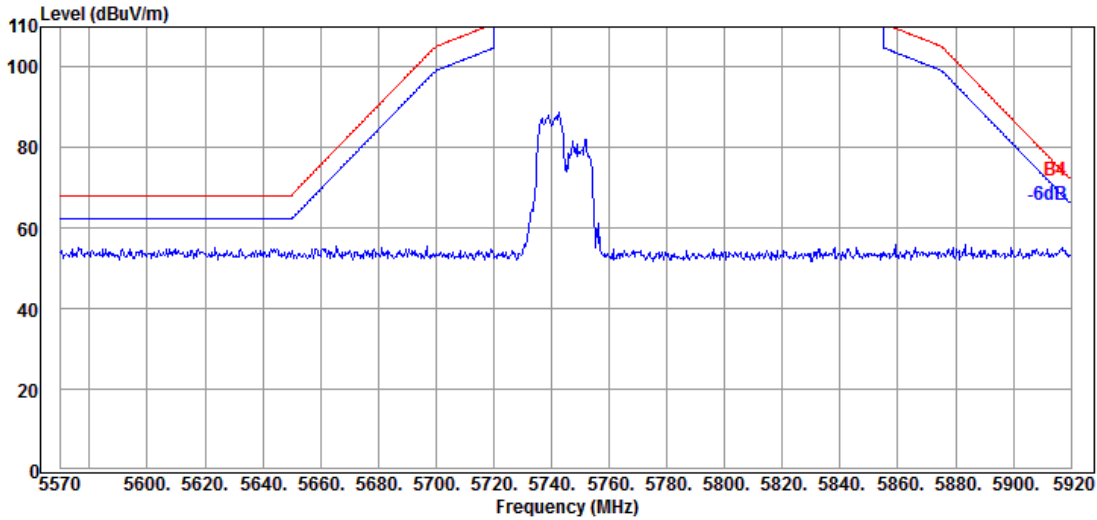


Antenna at Vertical Polarization

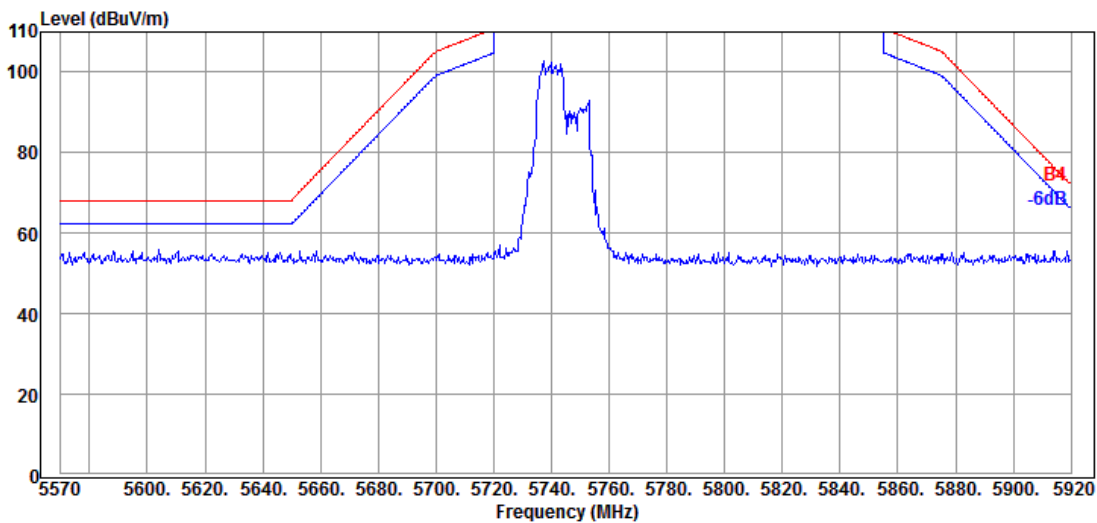


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

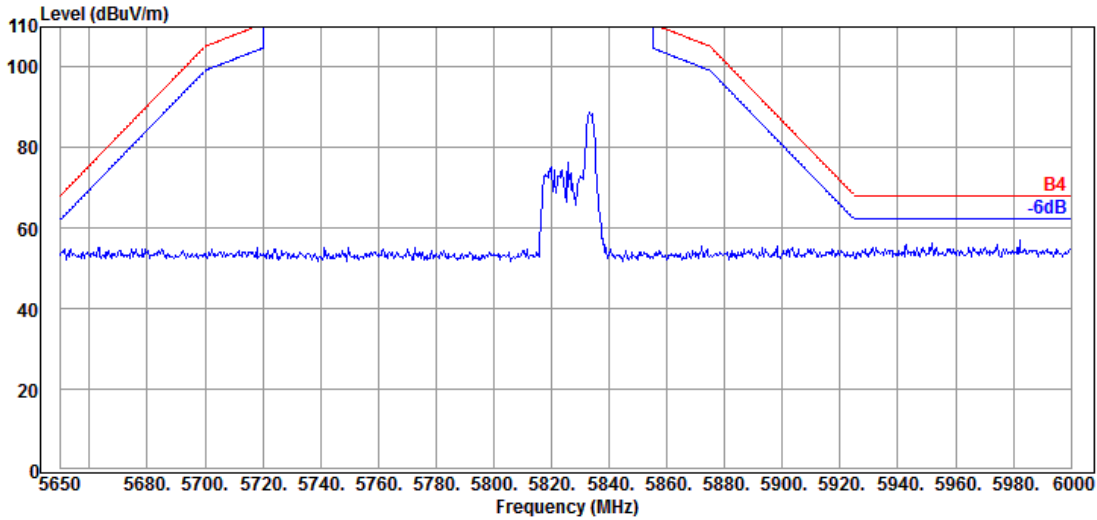


Antenna at Vertical Polarization

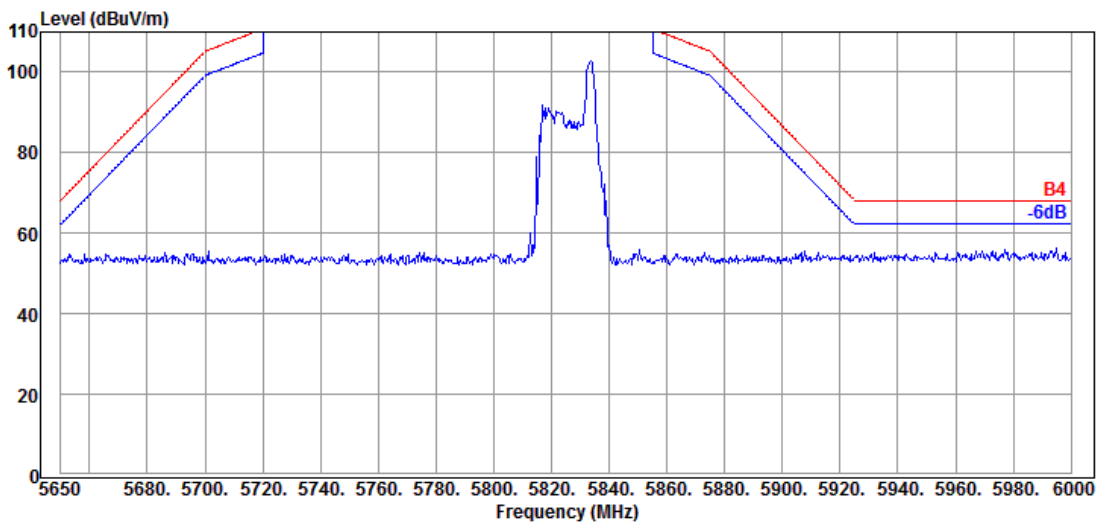


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

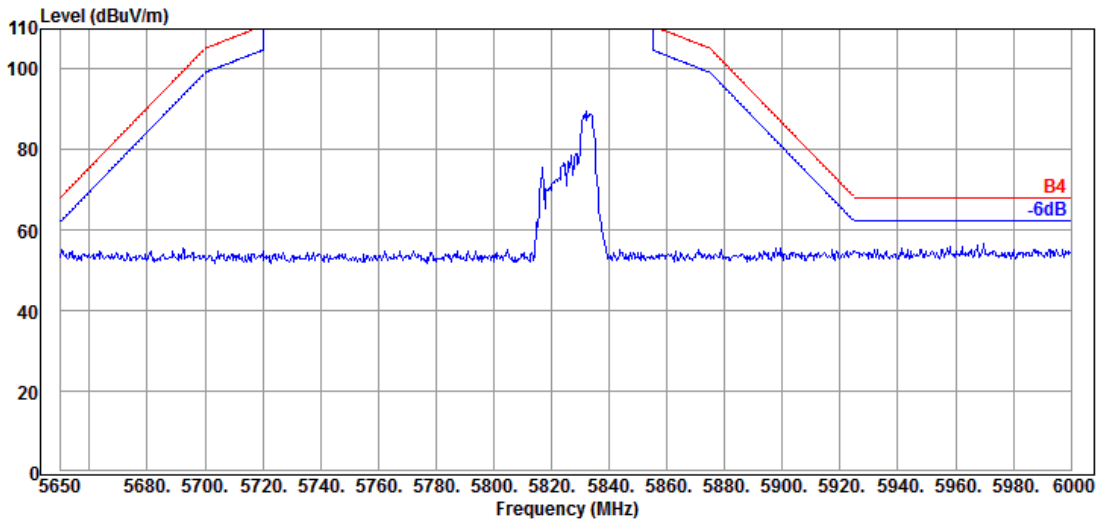


Antenna at Vertical Polarization

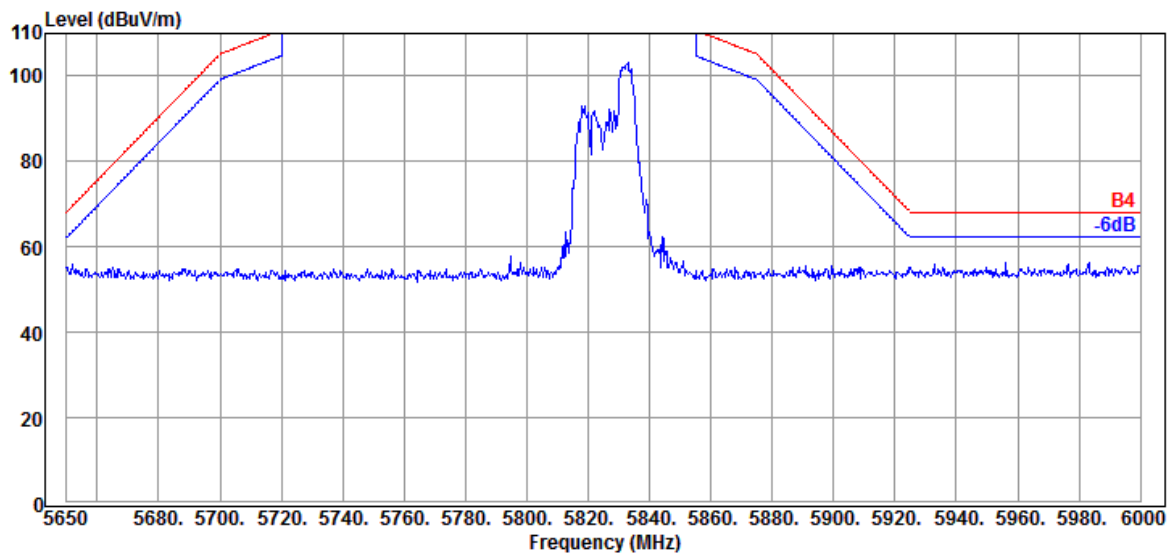


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

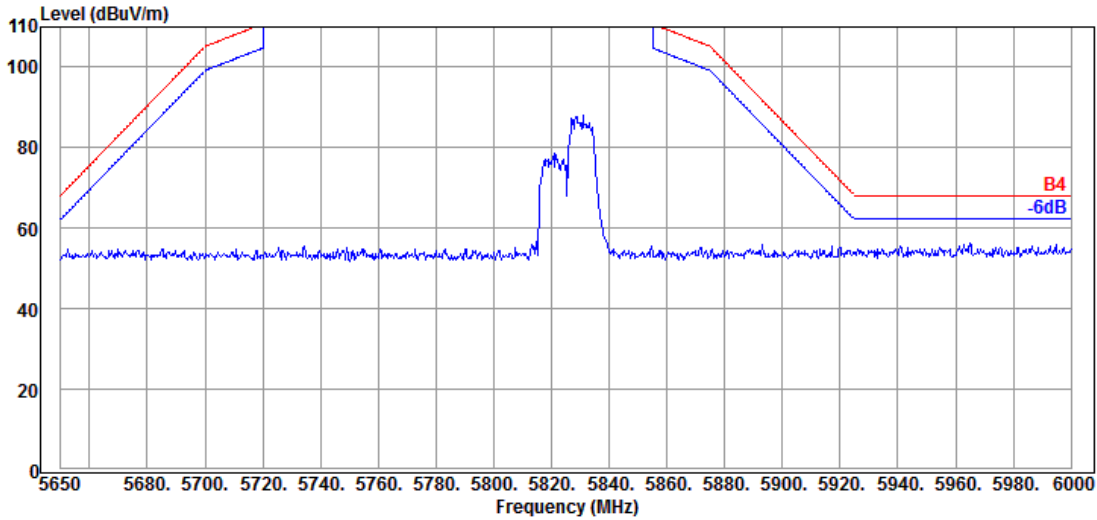

Antenna at Vertical Polarization

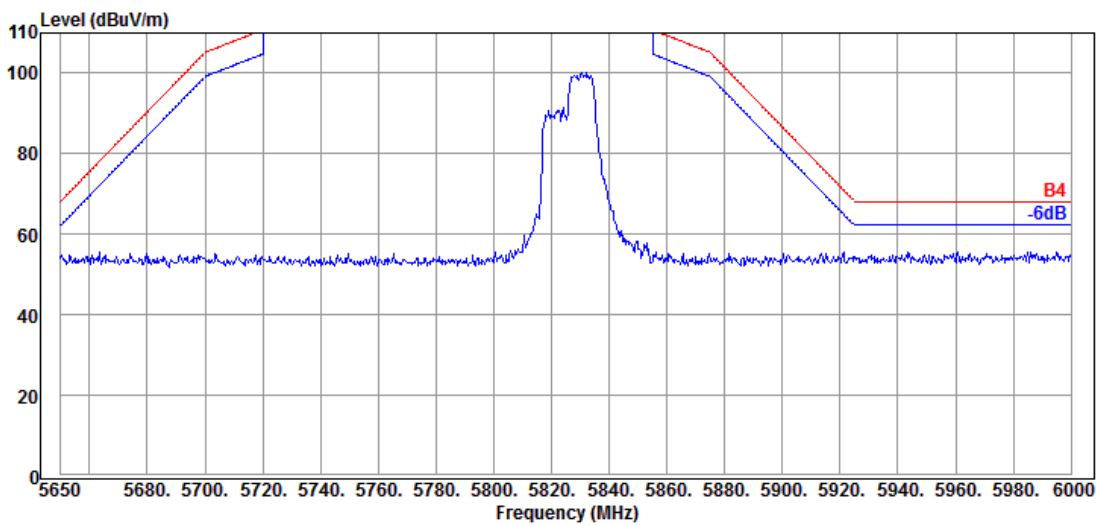


Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

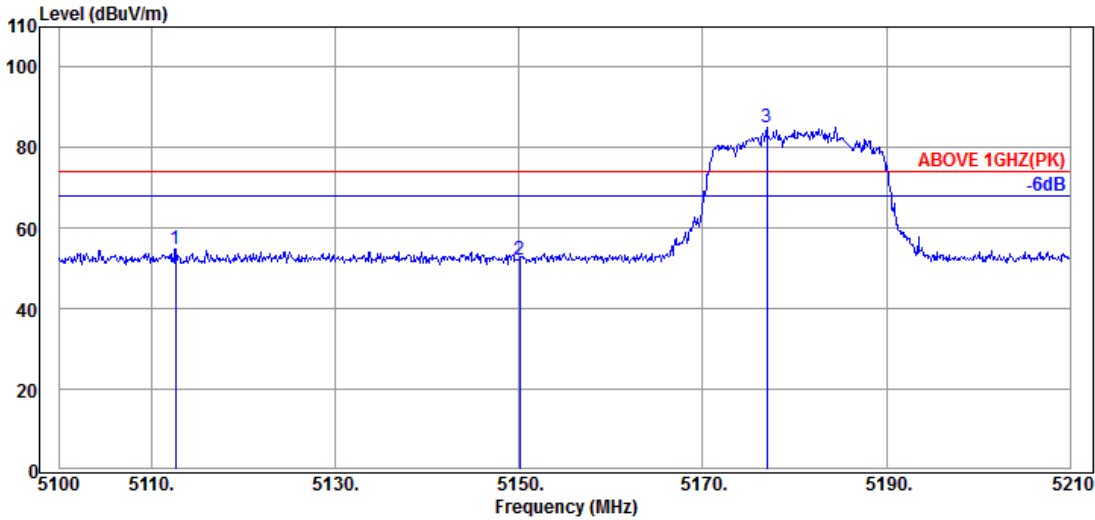

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.650	33.97	8.36	39.22	51.81	54.92	74.00	19.08	Peak
5150.050	34.10	8.39	39.21	49.05	52.33	74.00	21.67	Peak
@ 5177.000	34.23	8.41	39.21	81.73	85.16	---	---	Peak

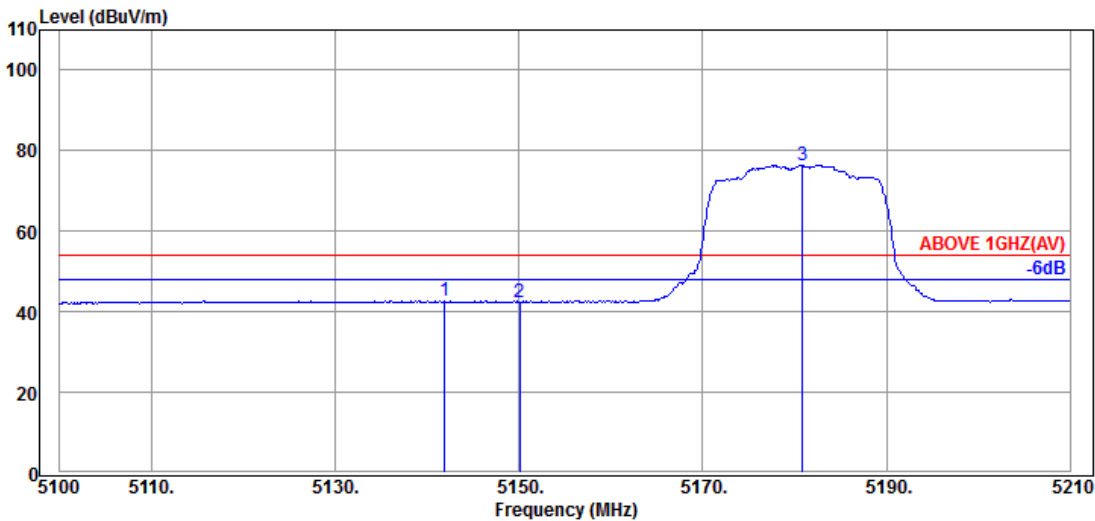

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.910	34.10	8.39	39.21	39.41	42.69	54.00	11.31	Average
5150.050	34.10	8.39	39.21	39.15	42.43	54.00	11.57	Average
@ 5180.850	34.23	8.41	39.21	73.04	76.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

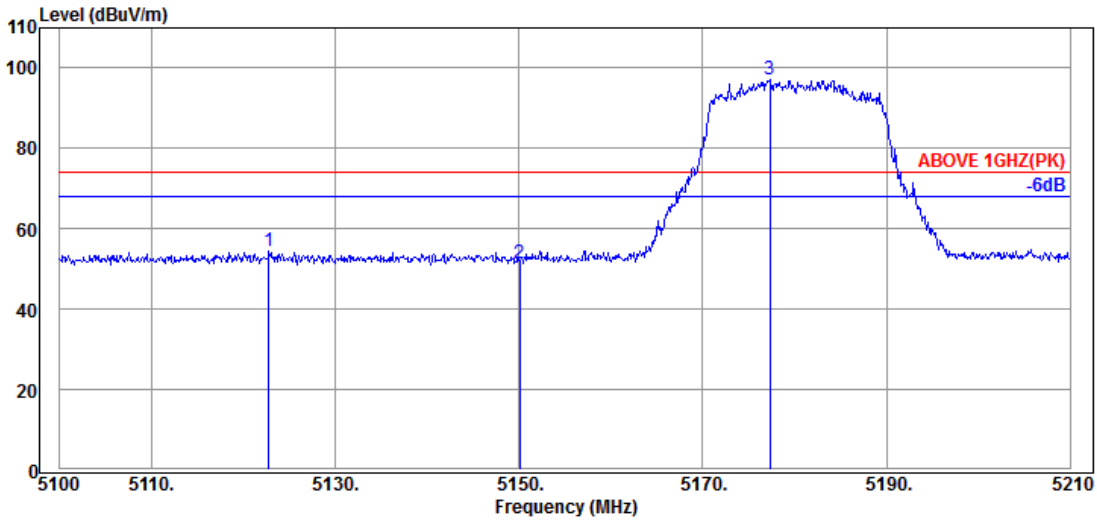

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.770	33.97	8.37	39.21	51.21	54.34	74.00	19.66	Peak
5150.050	34.10	8.39	39.21	48.30	51.58	74.00	22.42	Peak
@ 5177.330	34.23	8.41	39.21	93.70	97.13	---	---	Peak

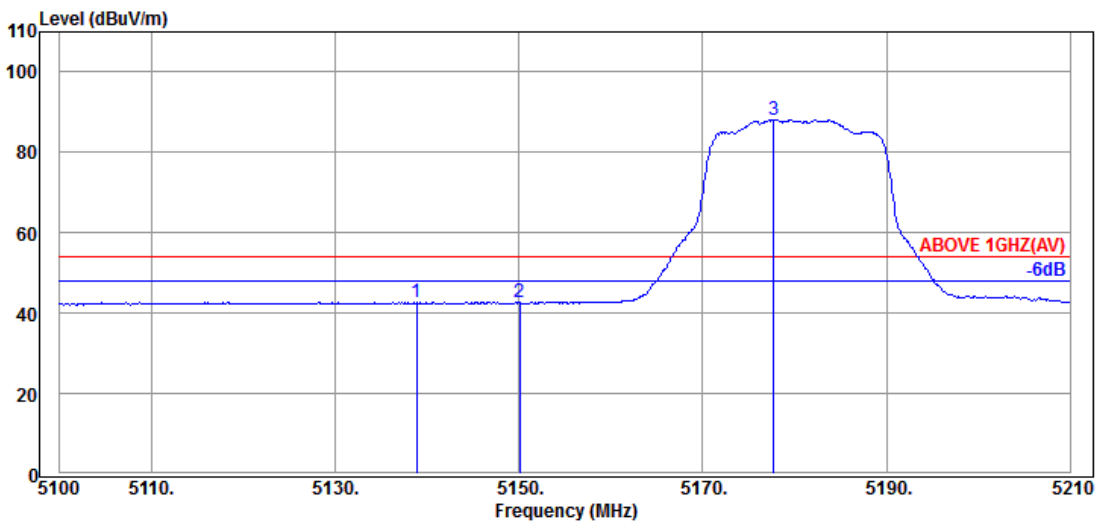

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.830	34.03	8.37	39.21	39.49	42.68	54.00	11.32	Average
5150.050	34.10	8.39	39.21	39.29	42.57	54.00	11.43	Average
@ 5177.770	34.23	8.41	39.21	84.60	88.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
------	---------------	------	--------

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

RU Configuration	242/62	Frequency	TX 5310MHz
------------------	--------	-----------	------------

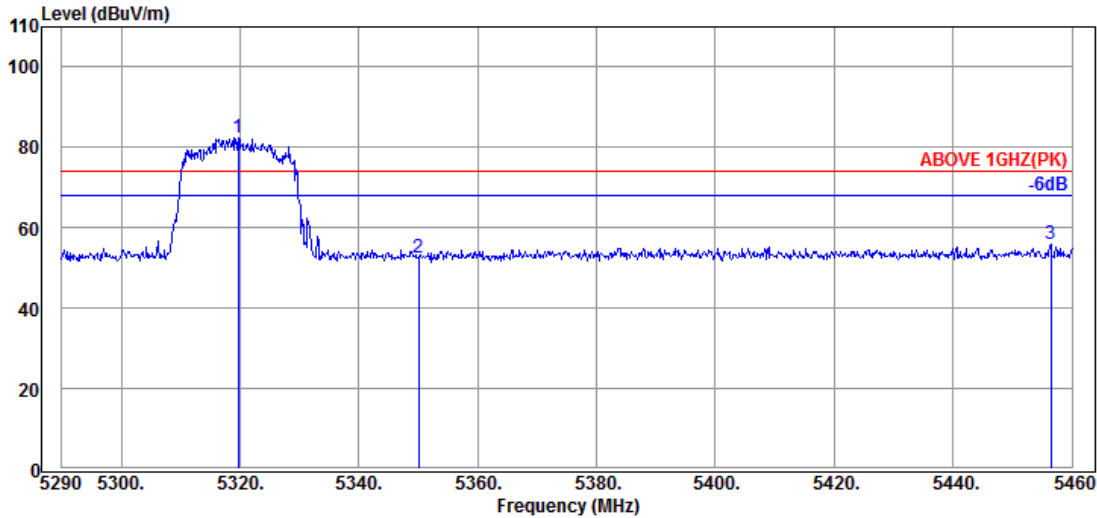

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.750	34.53	8.53	39.19	78.60	82.47	---	---	Peak
5350.010	34.60	8.56	39.19	48.44	52.41	74.00	21.59	Peak
5456.430	34.60	8.64	39.17	51.75	55.82	74.00	18.18	Peak

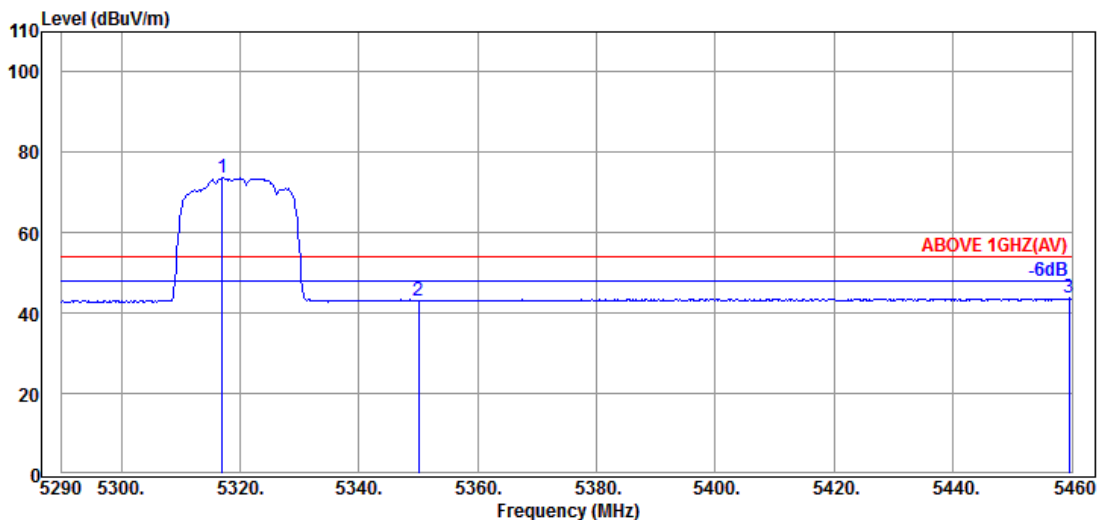


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.030	34.53	8.53	39.19	69.91	73.78	---	---	Average
5350.010	34.60	8.56	39.19	39.00	42.97	54.00	11.03	Average
5459.490	34.60	8.64	39.17	39.59	43.66	54.00	10.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

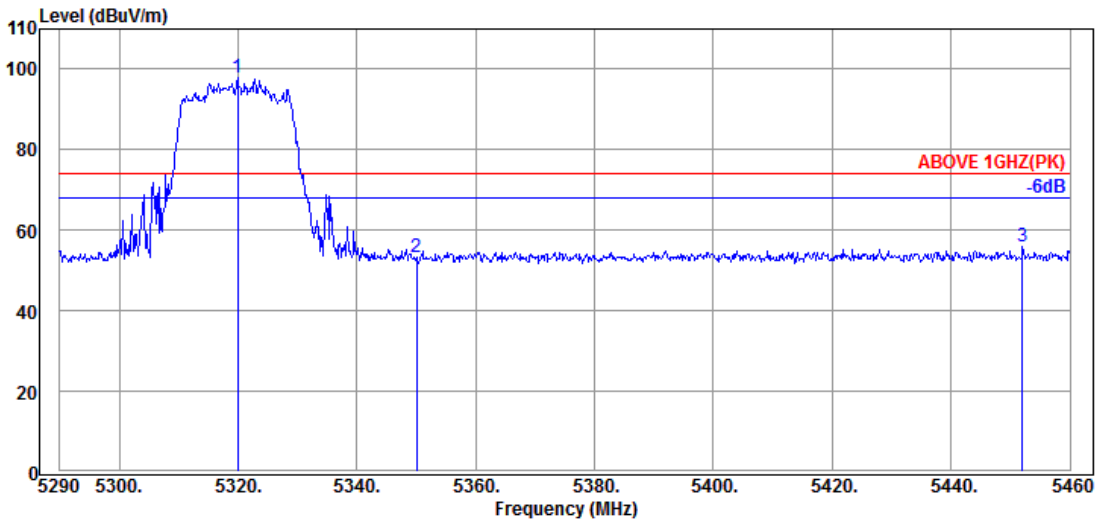

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.920	34.53	8.53	39.19	94.09	97.96	---	---	Peak
5350.010	34.60	8.56	39.19	49.23	53.20	74.00	20.80	Peak
5452.010	34.60	8.64	39.17	51.71	55.78	74.00	18.22	Peak

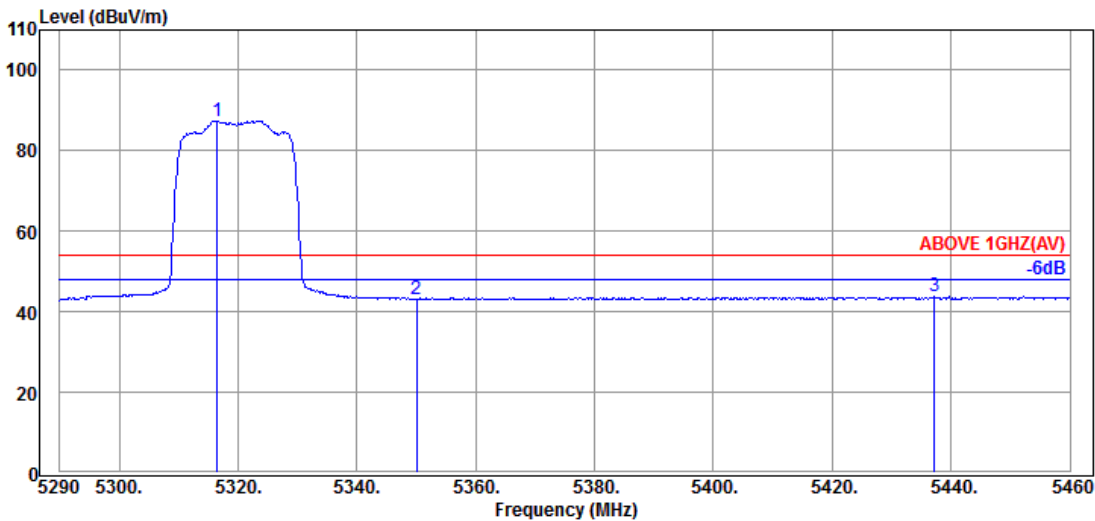

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.520	34.53	8.53	39.19	83.41	87.28	---	---	Average
5350.010	34.60	8.56	39.19	39.16	43.13	54.00	10.87	Average
5437.220	34.62	8.63	39.18	39.62	43.69	54.00	10.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

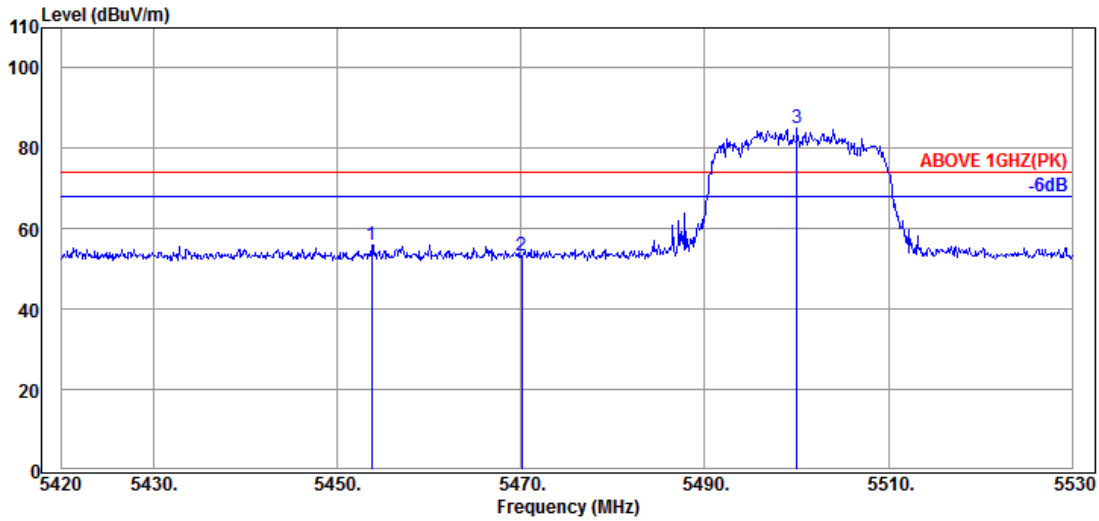

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.770	34.60	8.64	39.17	52.04	56.11	74.00	17.89	Peak
5470.050	34.57	8.65	39.17	49.43	53.48	74.00	20.52	Peak
@ 5500.080	34.50	8.68	39.17	80.87	84.88	---	---	Peak

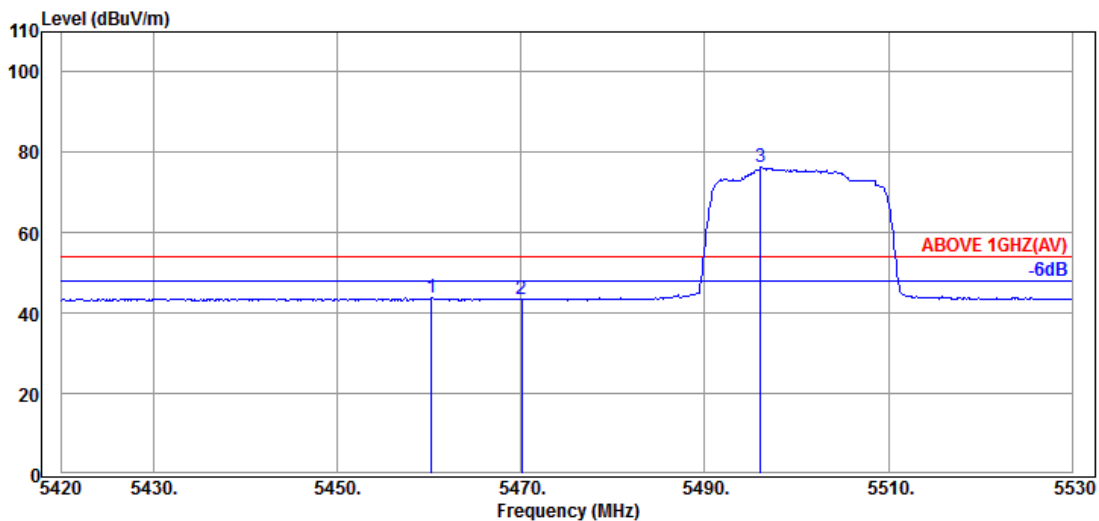


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.260	34.60	8.64	39.17	39.74	43.81	54.00	10.19	Average
5470.050	34.57	8.65	39.17	39.48	43.53	54.00	10.47	Average
@ 5496.120	34.50	8.67	39.17	72.23	76.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

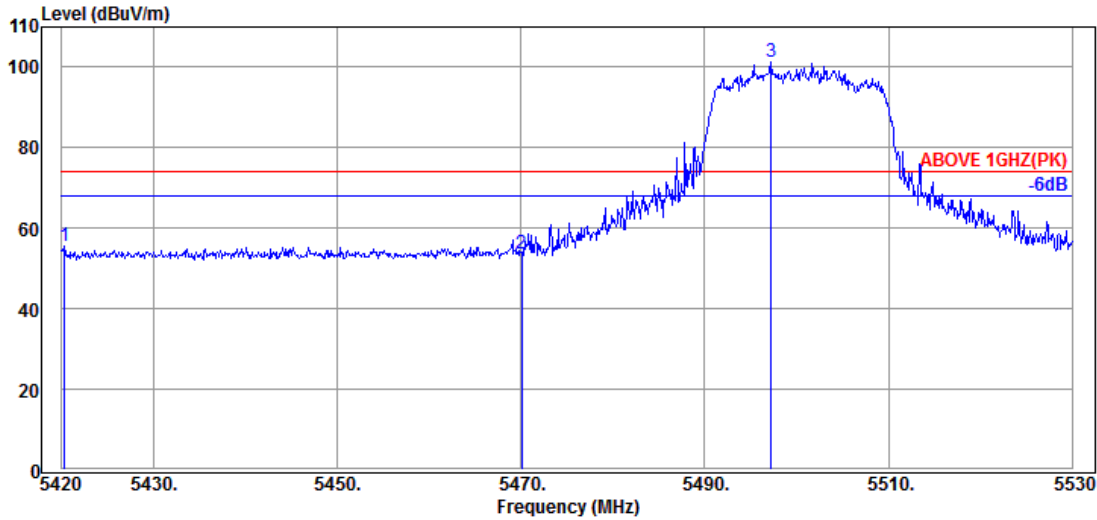

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.330	34.65	8.61	39.18	51.38	55.46	74.00	18.54	Peak
5470.050	34.57	8.65	39.17	49.45	53.50	74.00	20.50	Peak
@ 5497.220	34.50	8.68	39.17	97.34	101.35	---	---	Peak

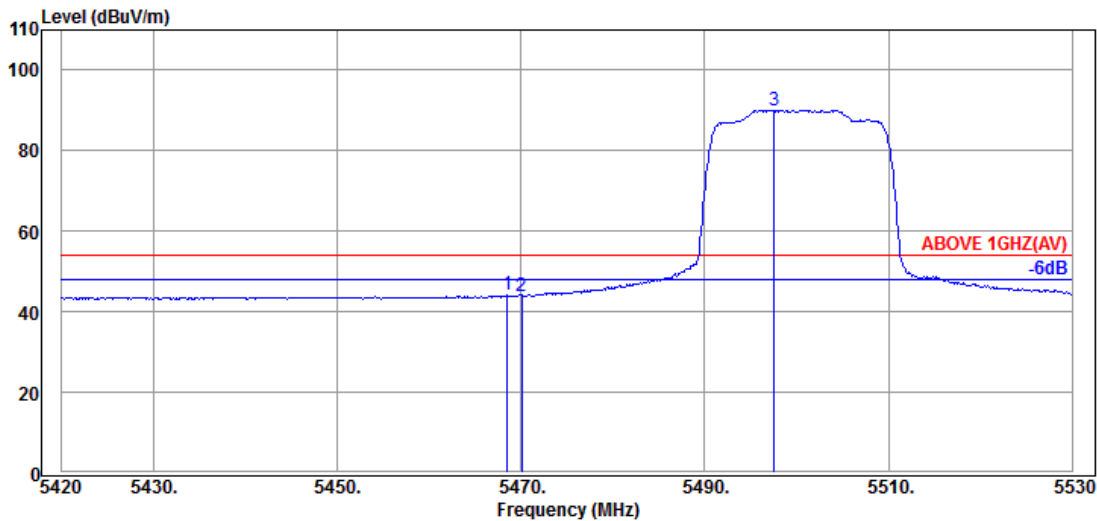


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.510	34.57	8.65	39.17	40.02	44.07	54.00	9.93	Average
5470.050	34.57	8.65	39.17	39.95	44.00	54.00	10.00	Average
@ 5497.550	34.50	8.68	39.17	86.13	90.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/62	Frequency	TX 5670MHz

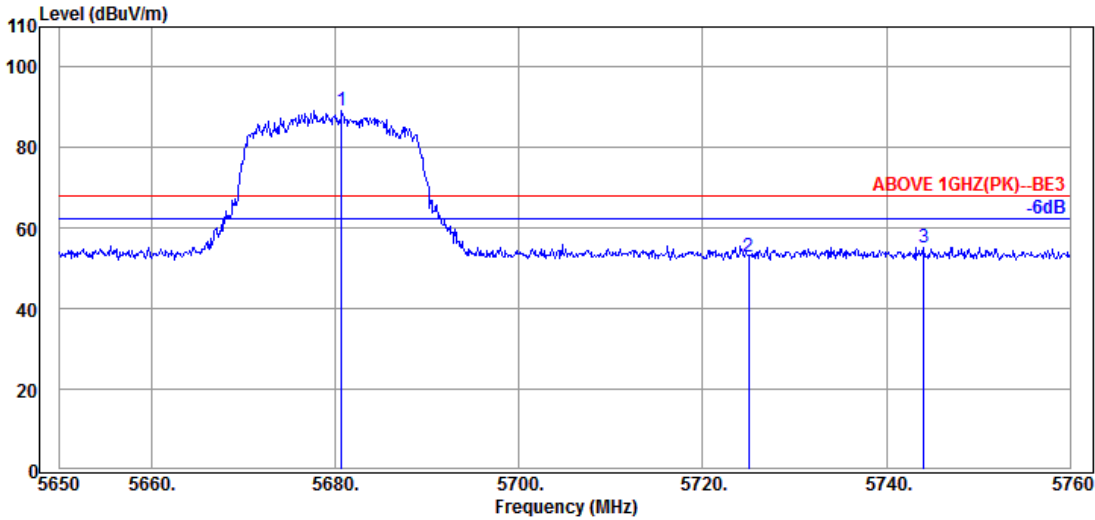

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.690	34.53	8.82	39.22	85.13	89.26	---	---	Peak
5725.020	34.50	8.86	39.23	48.67	52.80	68.20	15.40	Peak
5744.050	34.50	8.88	39.23	51.13	55.28	68.20	12.92	Peak

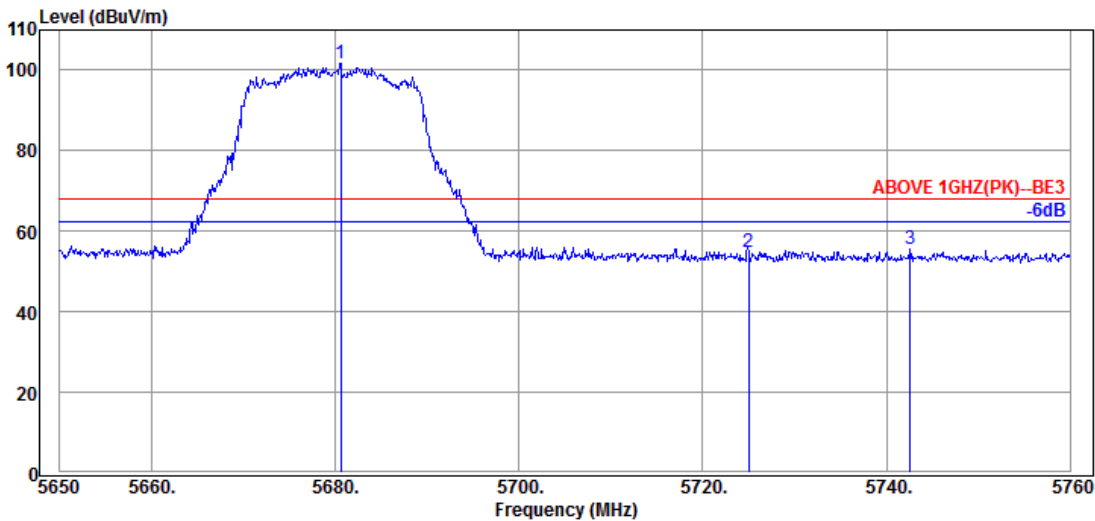


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.580	34.53	8.82	39.22	97.66	101.79	---	---	Peak
5725.020	34.50	8.86	39.23	50.58	54.71	68.20	13.49	Peak
5742.620	34.50	8.88	39.23	51.46	55.61	68.20	12.59	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

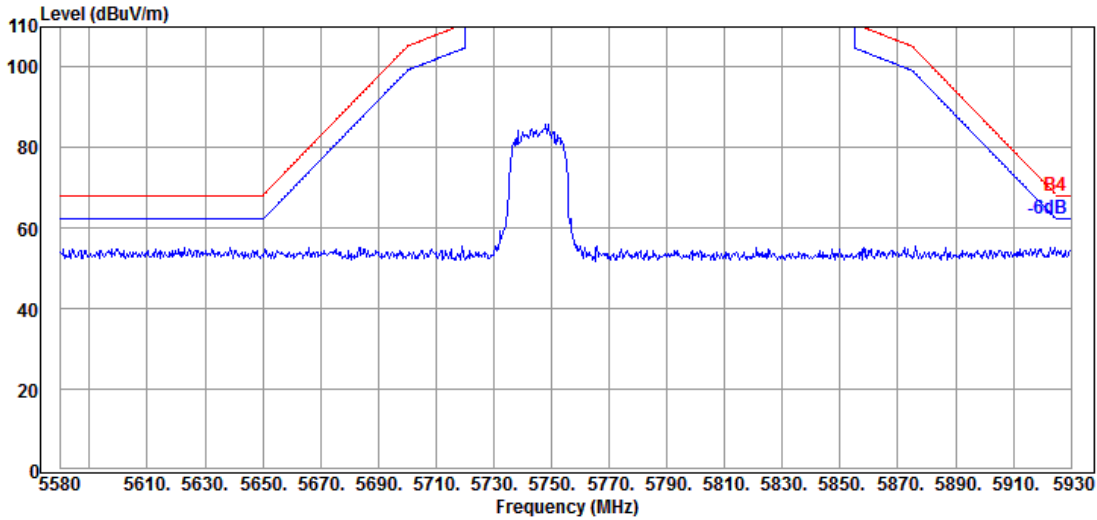


Antenna at Vertical Polarization

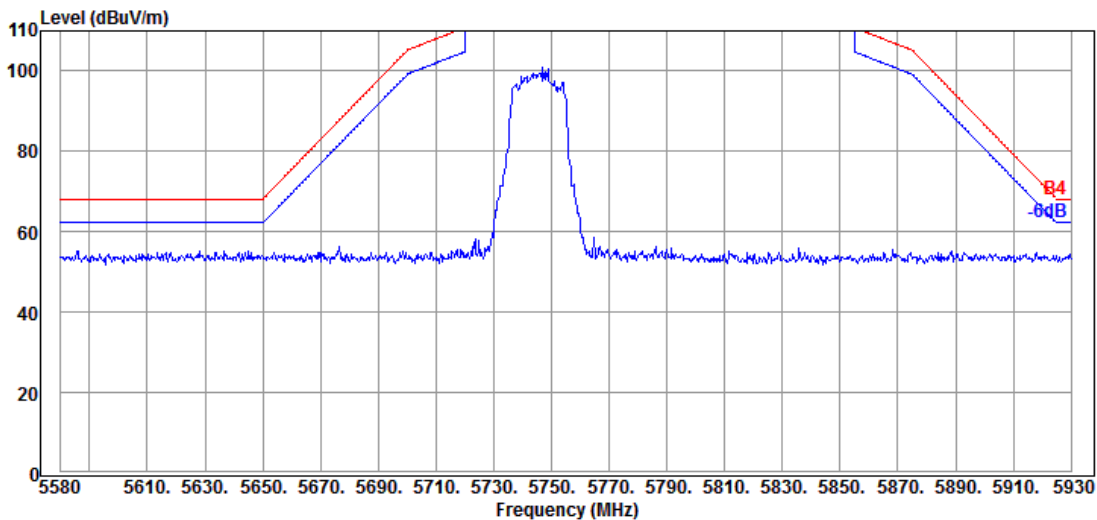


Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

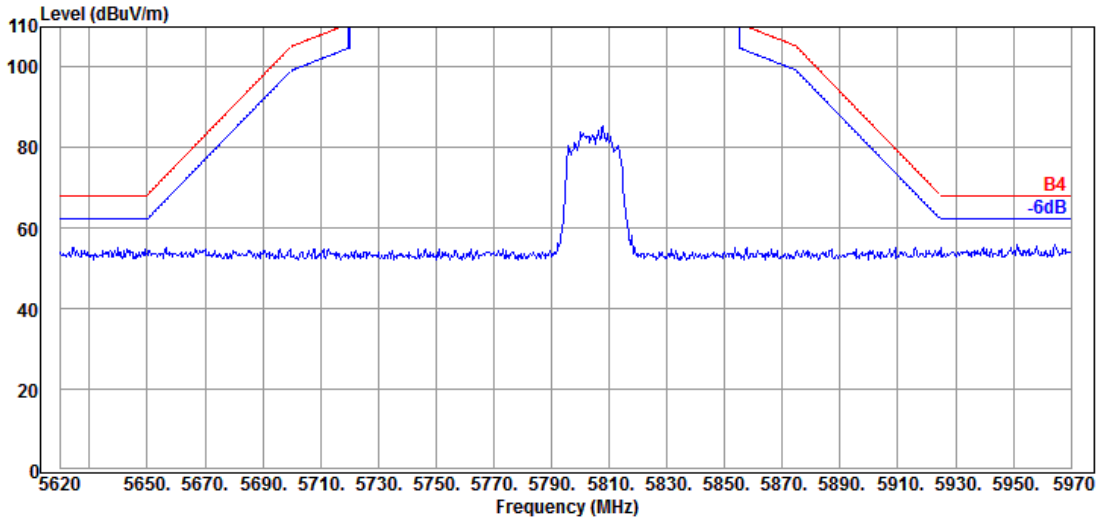

Antenna at Vertical Polarization

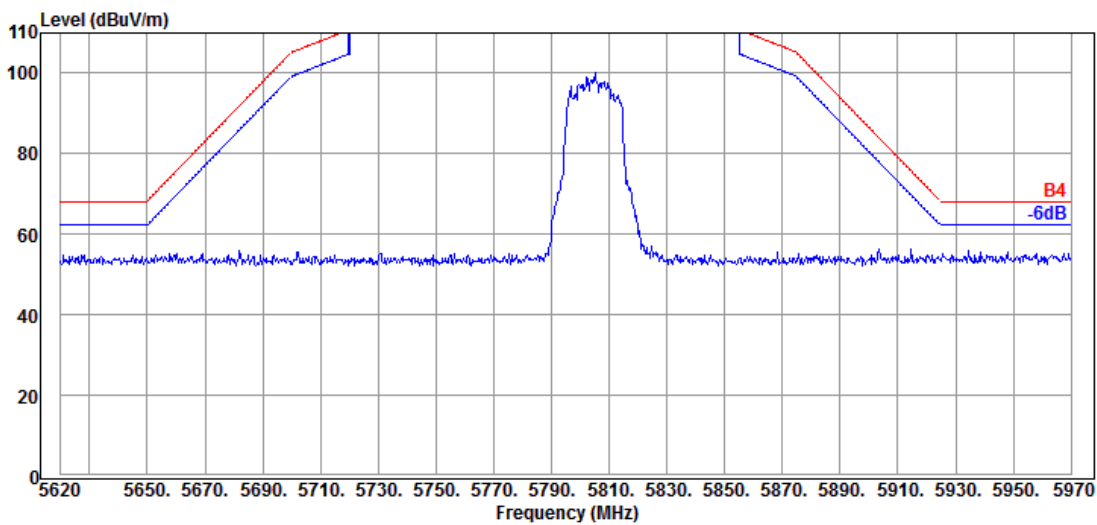


Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

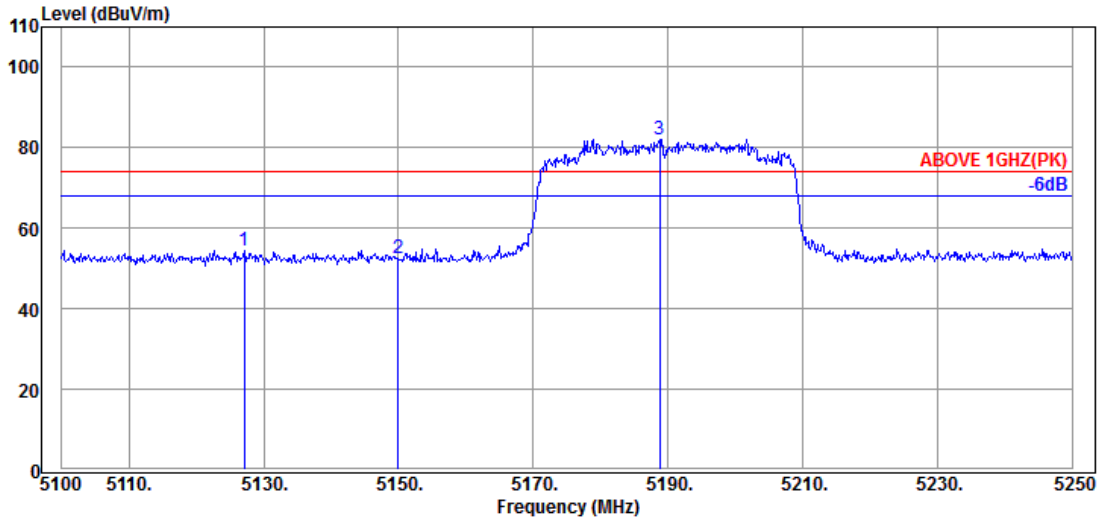

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.150	34.03	8.37	39.21	51.42	54.61	74.00	19.39	Peak
5149.950	34.10	8.39	39.21	49.21	52.49	74.00	21.51	Peak
@ 5188.800	34.30	8.41	39.21	78.55	82.05	---	---	Peak

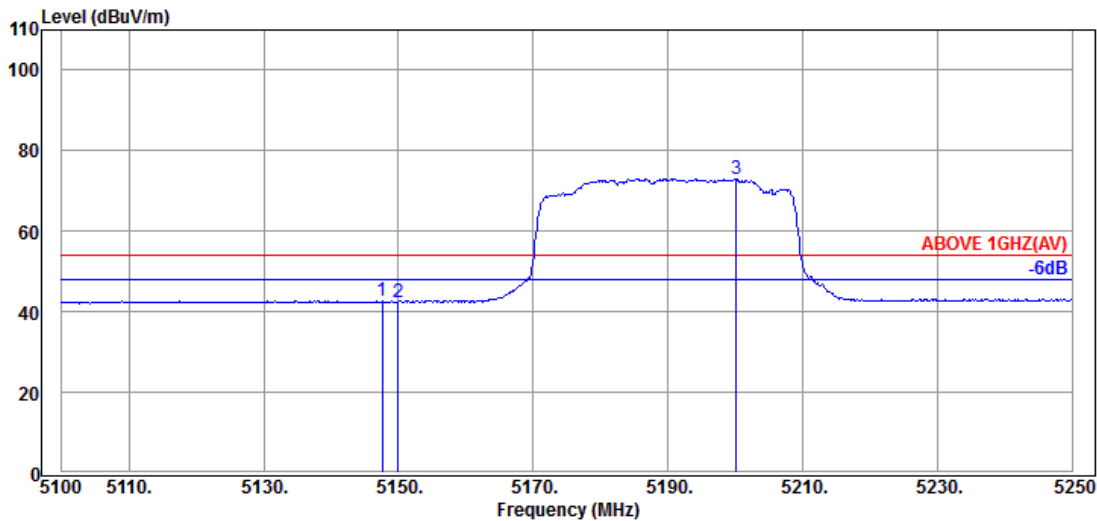

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.550	34.10	8.39	39.21	39.39	42.67	54.00	11.33	Average
5149.950	34.10	8.39	39.21	39.17	42.45	54.00	11.55	Average
@ 5200.200	34.30	8.43	39.21	69.50	73.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

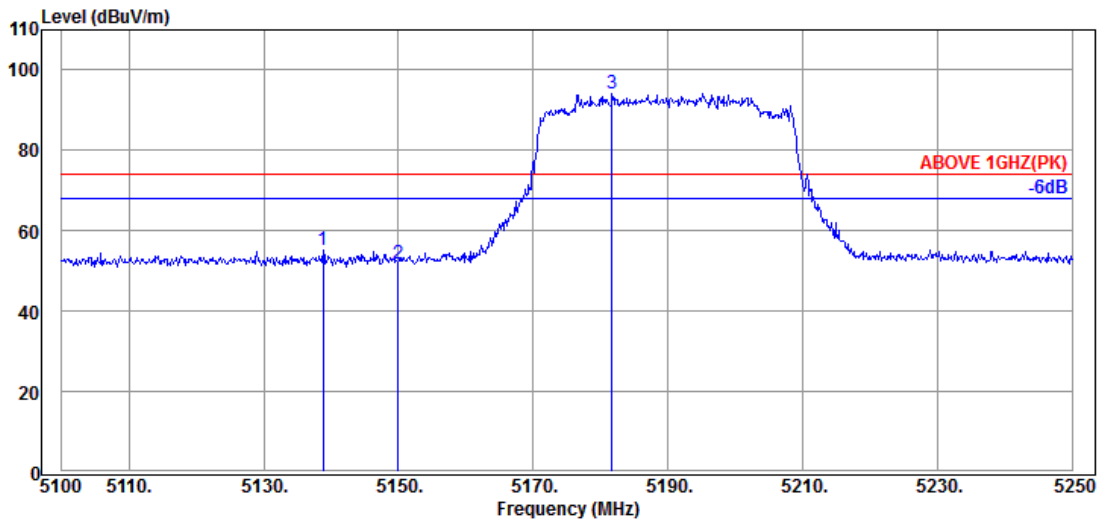

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.850	34.03	8.37	39.21	51.98	55.17	74.00	18.83	Peak
5149.950	34.10	8.39	39.21	48.68	51.96	74.00	22.04	Peak
@ 5181.750	34.23	8.41	39.21	90.87	94.30	---	---	Peak

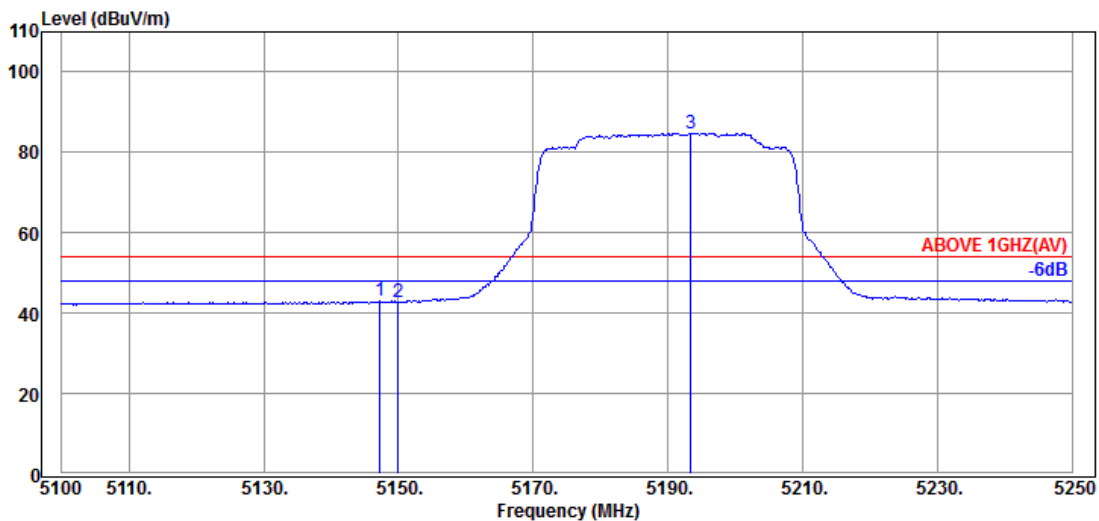

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.250	34.10	8.39	39.21	39.67	42.95	54.00	11.05	Average
5149.950	34.10	8.39	39.21	39.62	42.90	54.00	11.10	Average
@ 5193.450	34.30	8.43	39.21	81.32	84.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
------	---------------	------	--------

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

RU Configuration	484/66	Frequency	TX 5290MHz
------------------	--------	-----------	------------

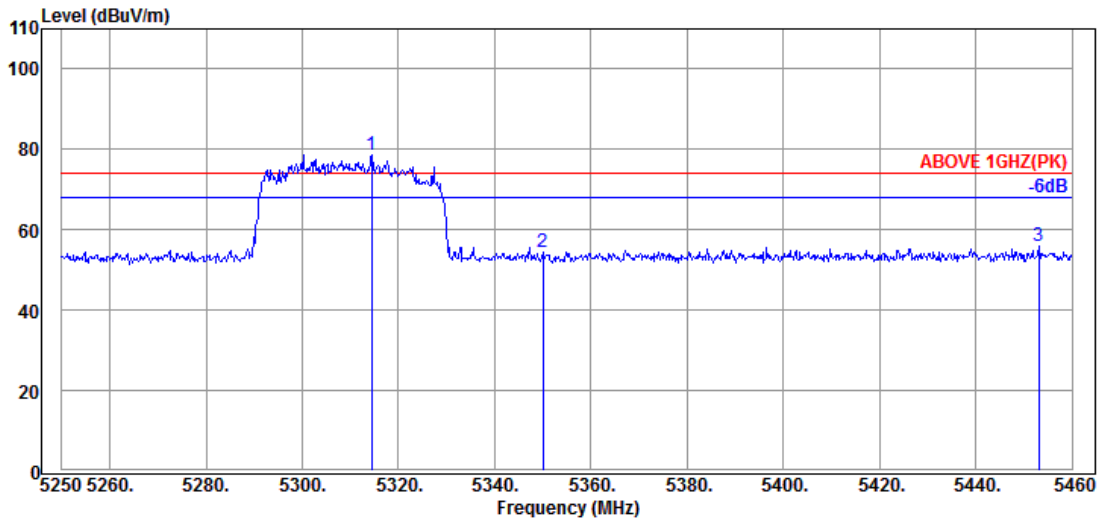

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.470	34.53	8.53	39.19	74.91	78.78	---	---	Peak
5349.960	34.60	8.56	39.19	50.36	54.33	74.00	19.67	Peak
5453.070	34.60	8.64	39.17	51.73	55.80	74.00	18.20	Peak

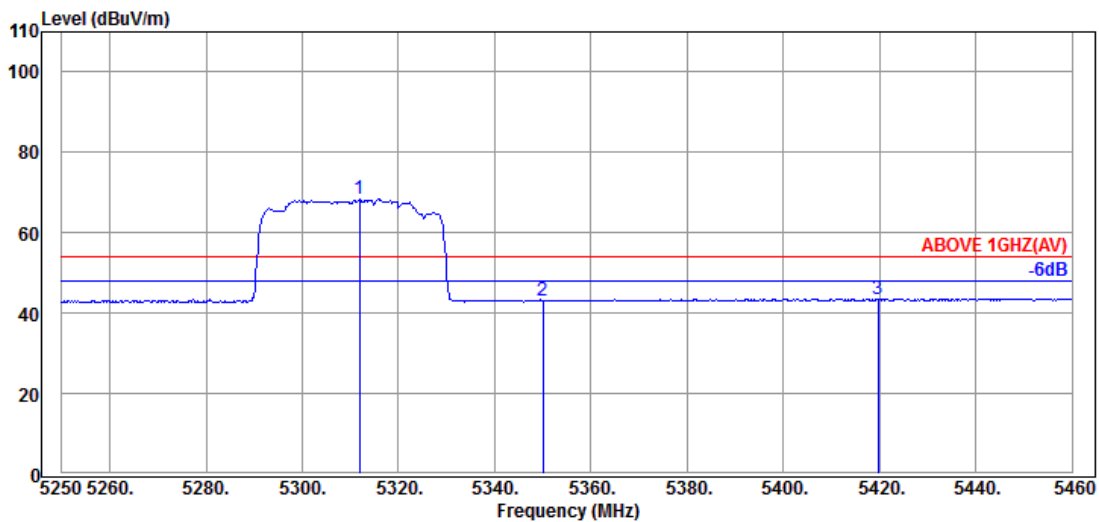


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.950	34.53	8.53	39.19	64.48	68.35	---	---	Average
5349.960	34.60	8.56	39.19	39.20	43.17	54.00	10.83	Average
5419.680	34.65	8.61	39.18	39.57	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

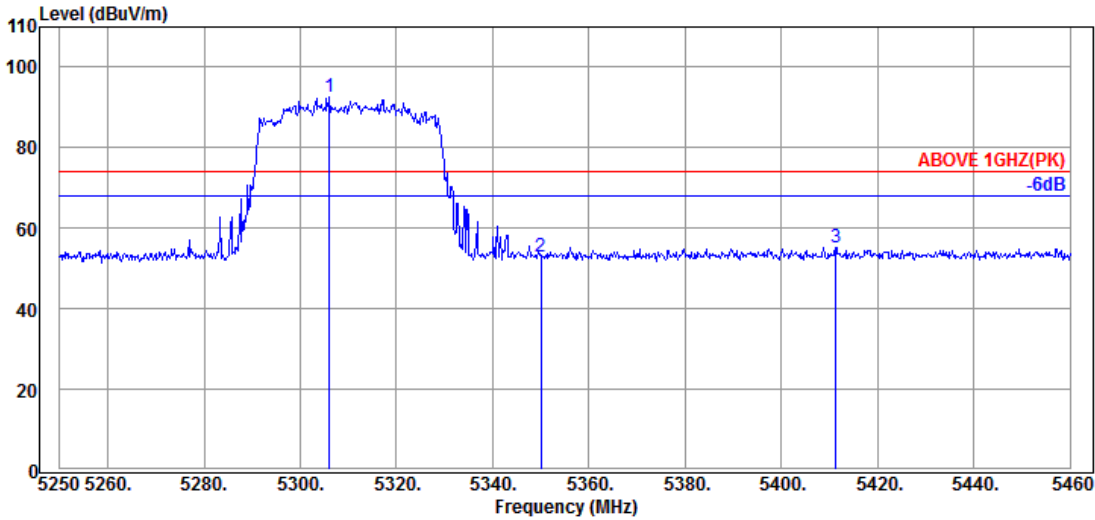

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.070	34.50	8.51	39.19	88.80	92.62	---	---	Peak
5349.960	34.60	8.56	39.19	48.99	52.96	74.00	21.04	Peak
5411.280	34.67	8.60	39.18	51.06	55.15	74.00	18.85	Peak

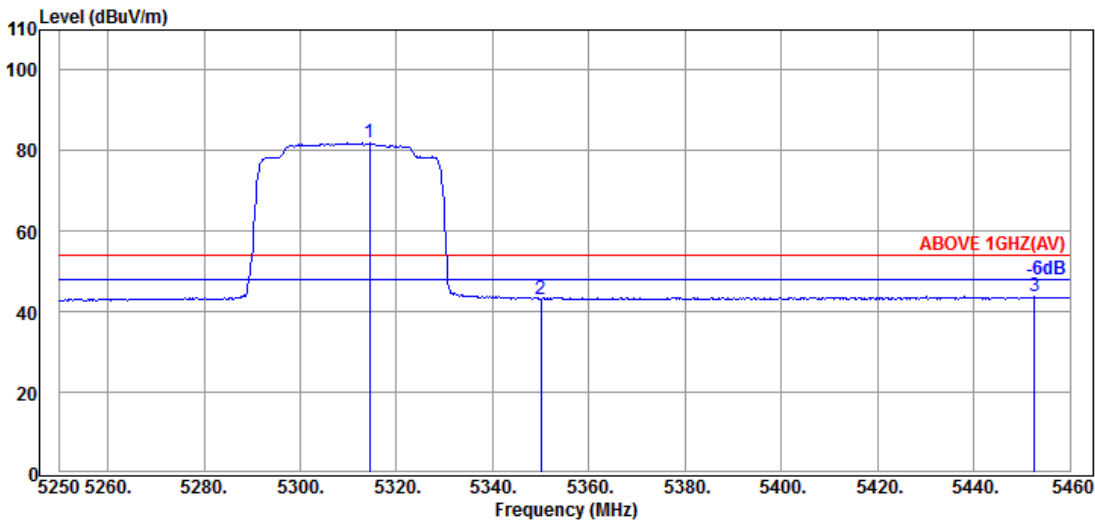


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.470	34.53	8.53	39.19	78.01	81.88	---	---	Average
5349.960	34.60	8.56	39.19	39.28	43.25	54.00	10.75	Average
5452.650	34.60	8.64	39.17	39.65	43.72	54.00	10.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

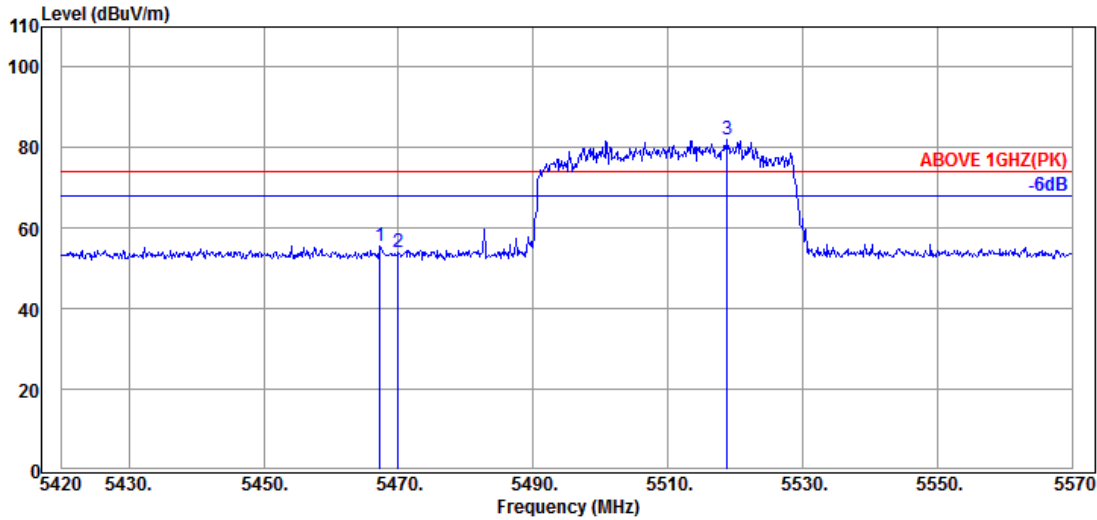

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.57	8.65	39.17	51.64	55.69	74.00	18.31	Peak
5469.950	34.57	8.65	39.17	50.07	54.12	74.00	19.88	Peak
@ 5518.850	34.53	8.70	39.17	77.80	81.86	---	---	Peak

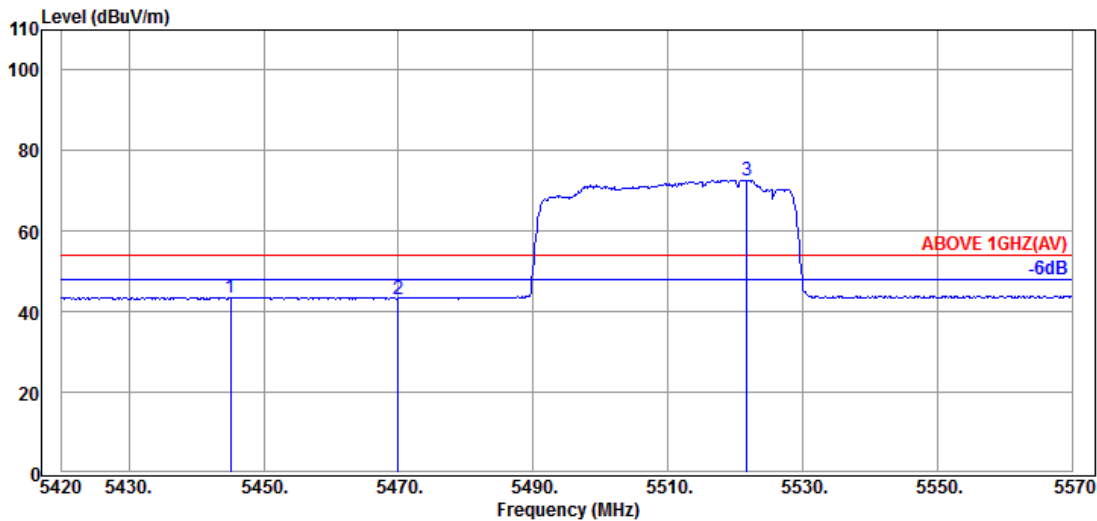


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.050	34.62	8.63	39.18	39.55	43.62	54.00	10.38	Average
5469.950	34.57	8.65	39.17	39.18	43.23	54.00	10.77	Average
@ 5521.700	34.53	8.70	39.17	68.71	72.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

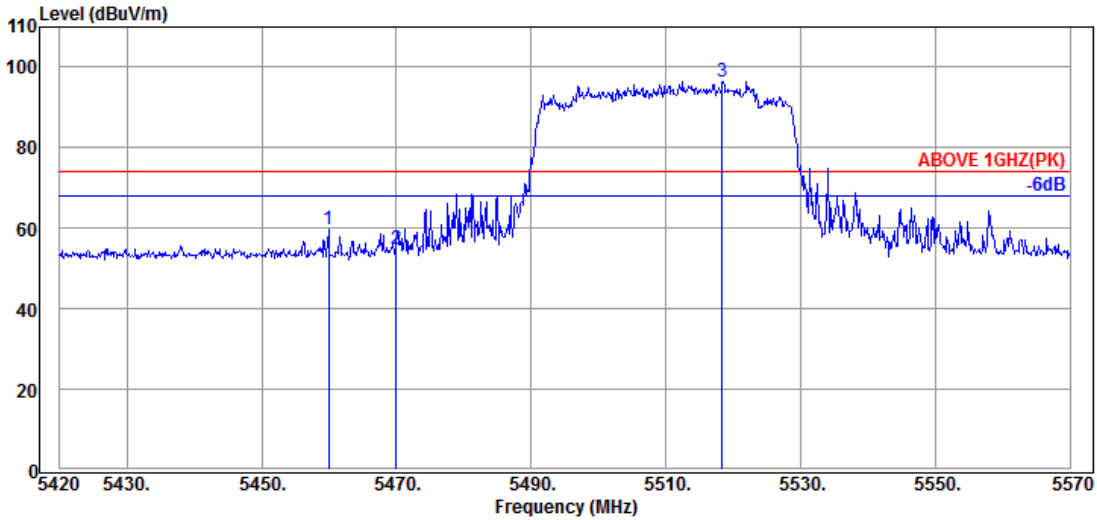

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.900	34.60	8.64	39.17	55.49	59.56	74.00	14.44	Peak
5469.950	34.57	8.65	39.17	50.81	54.86	74.00	19.14	Peak
@ 5518.400	34.53	8.70	39.17	92.46	96.52	---	---	Peak

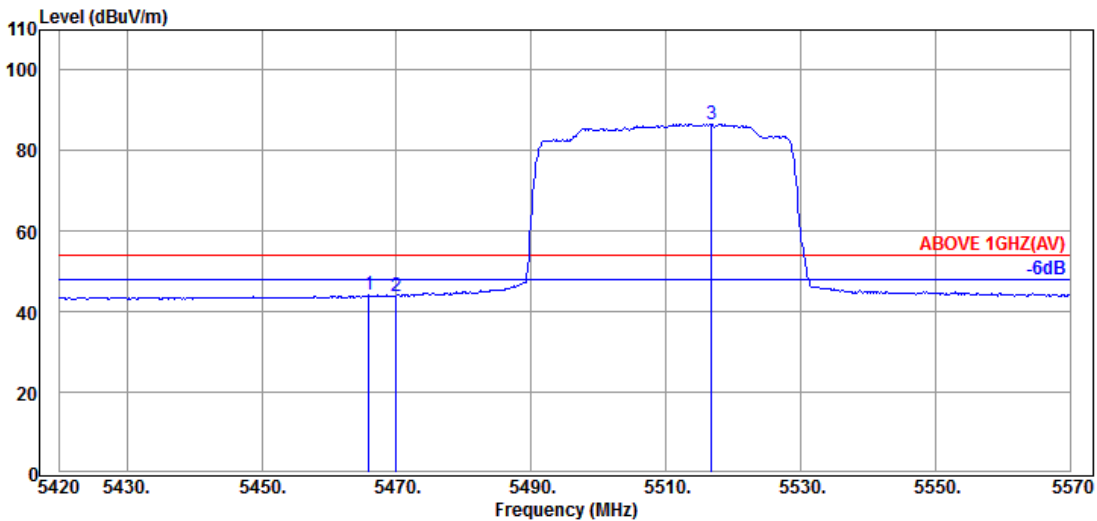


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.900	34.57	8.65	39.17	40.03	44.08	54.00	9.92	Average
5469.950	34.57	8.65	39.17	39.94	43.99	54.00	10.01	Average
@ 5516.750	34.53	8.70	39.17	82.66	86.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

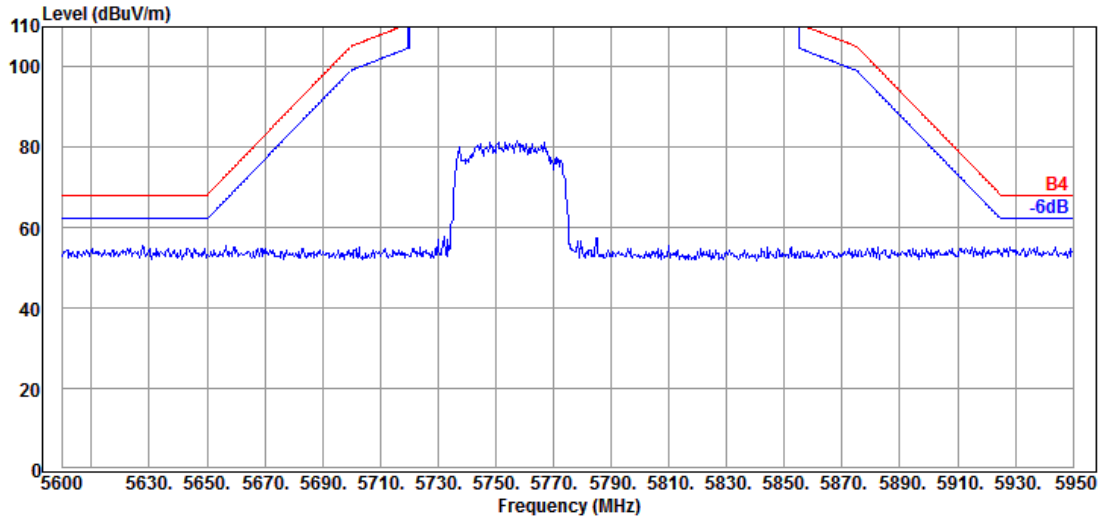


Antenna at Vertical Polarization

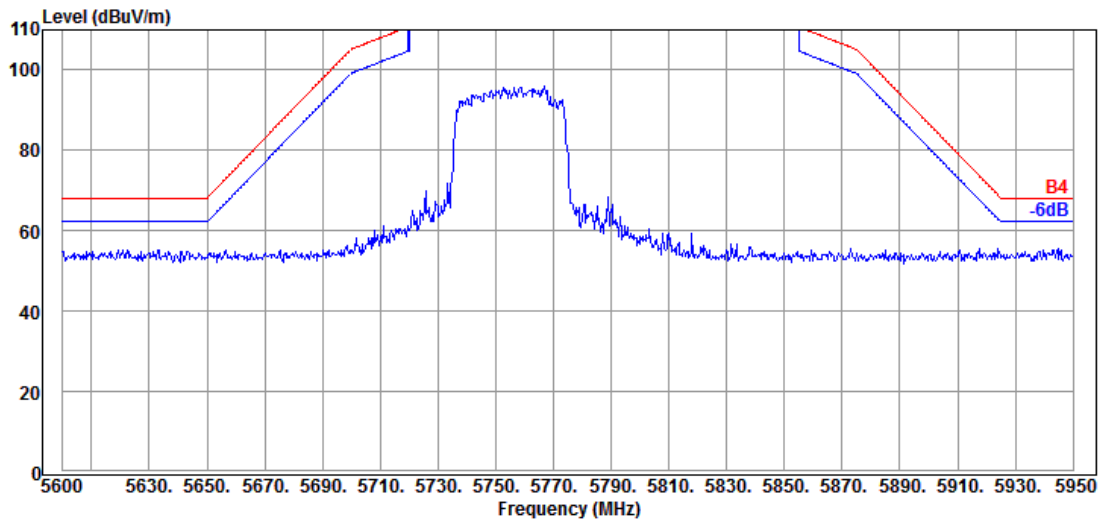


Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

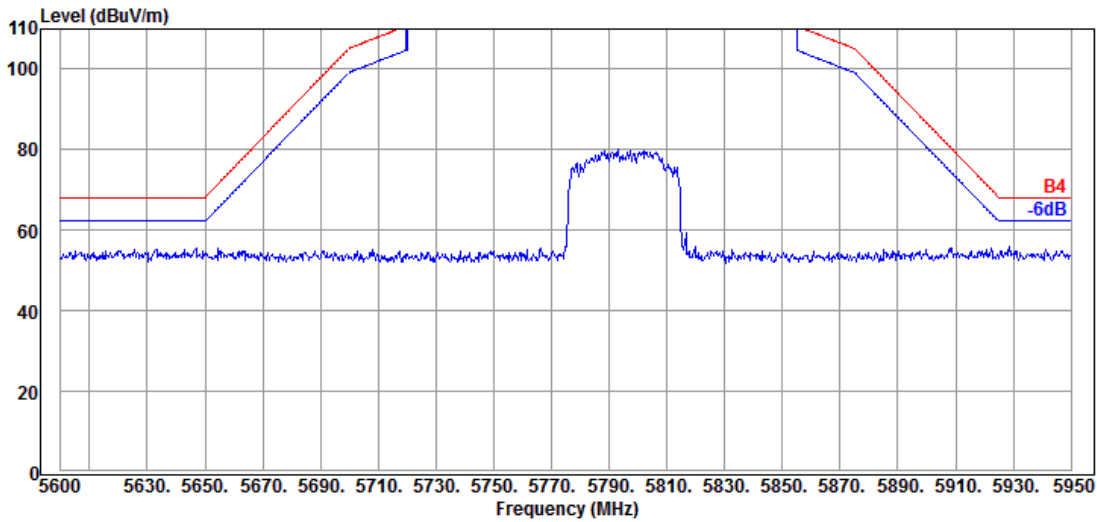

Antenna at Vertical Polarization

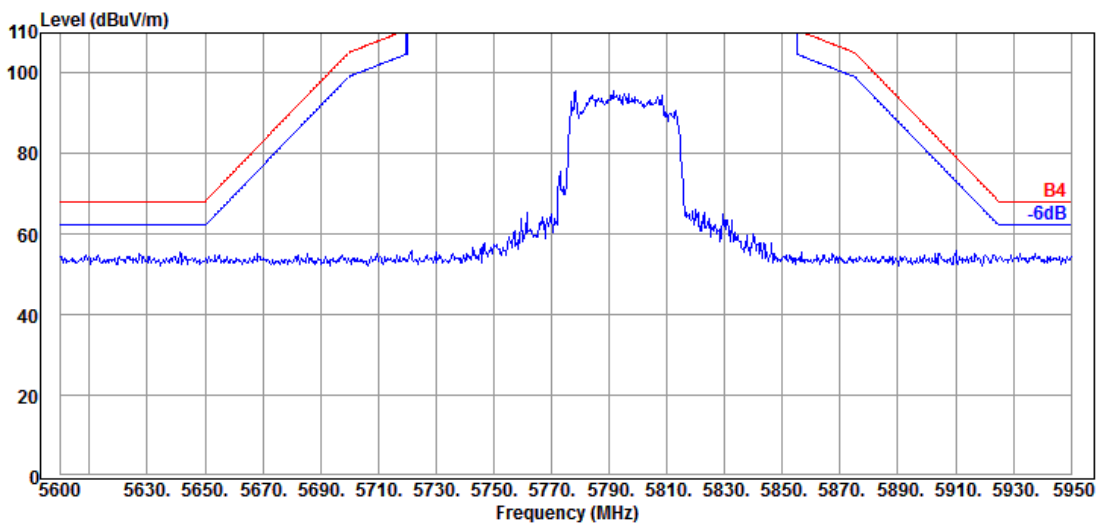


Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

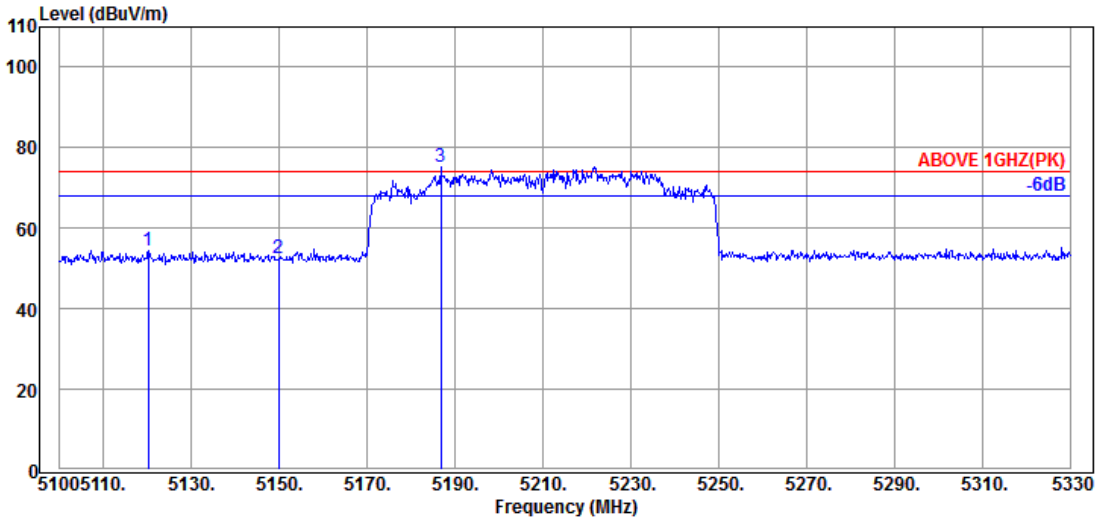

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.240	33.97	8.36	39.22	51.20	54.31	74.00	19.69	Peak
5149.910	34.10	8.39	39.21	49.27	52.55	74.00	21.45	Peak
@ 5186.710	34.30	8.41	39.21	71.57	75.07	---	---	Peak

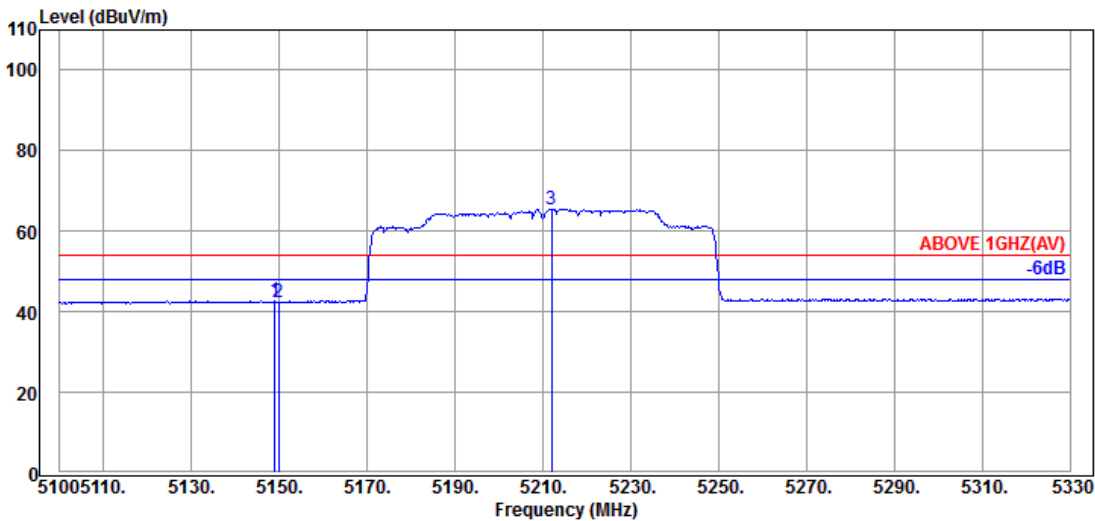


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.10	8.39	39.21	39.35	42.63	54.00	11.37	Average
5149.910	34.10	8.39	39.21	39.14	42.42	54.00	11.58	Average
@ 5212.010	34.35	8.44	39.20	61.93	65.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

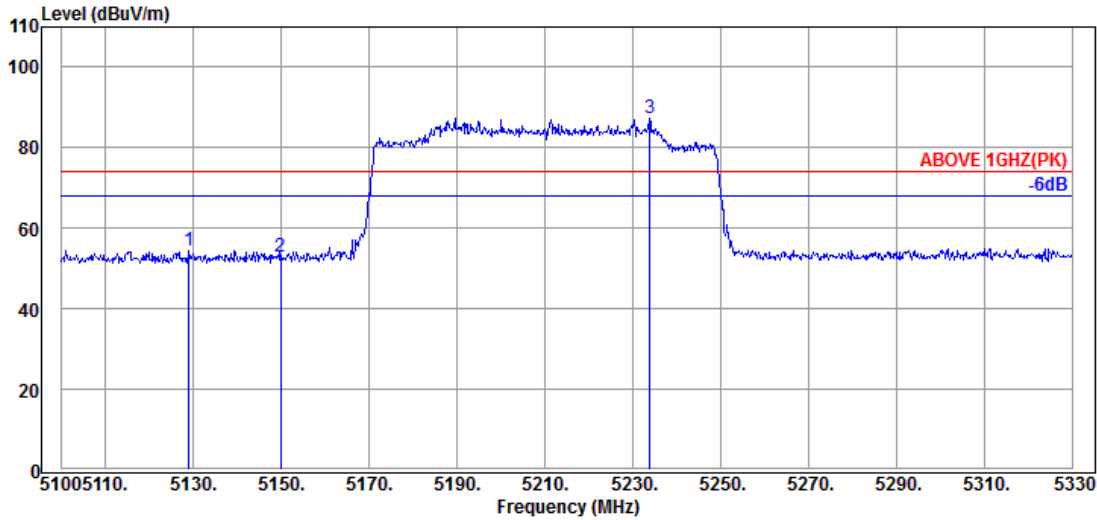

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.980	34.03	8.37	39.21	51.43	54.62	74.00	19.38	Peak
5149.910	34.10	8.39	39.21	49.73	53.01	74.00	20.99	Peak
@ 5233.860	34.45	8.46	39.20	83.74	87.45	---	---	Peak

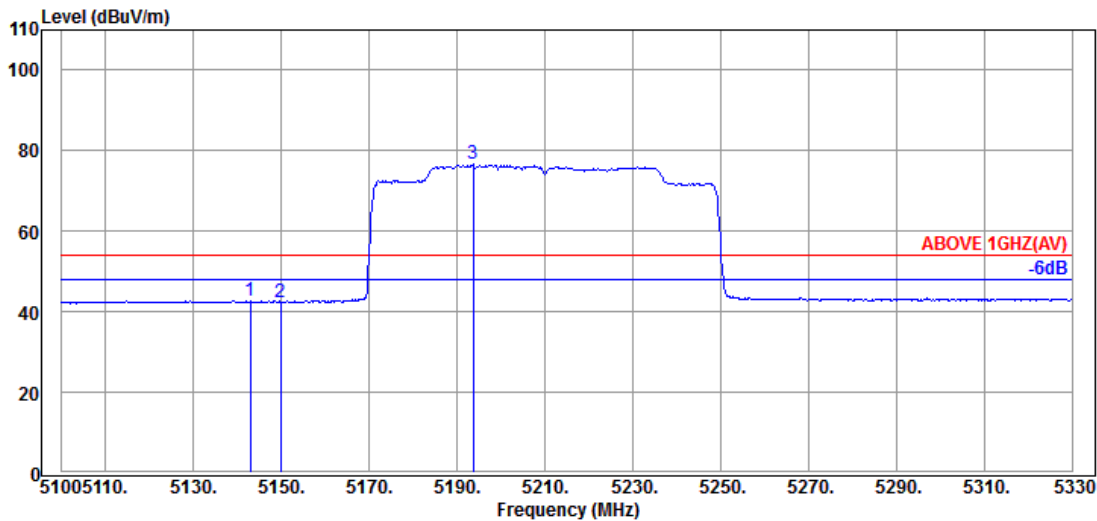


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.010	34.10	8.39	39.21	39.38	42.66	54.00	11.34	Average
5149.910	34.10	8.39	39.21	39.21	42.49	54.00	11.51	Average
@ 5193.610	34.30	8.43	39.21	73.08	76.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

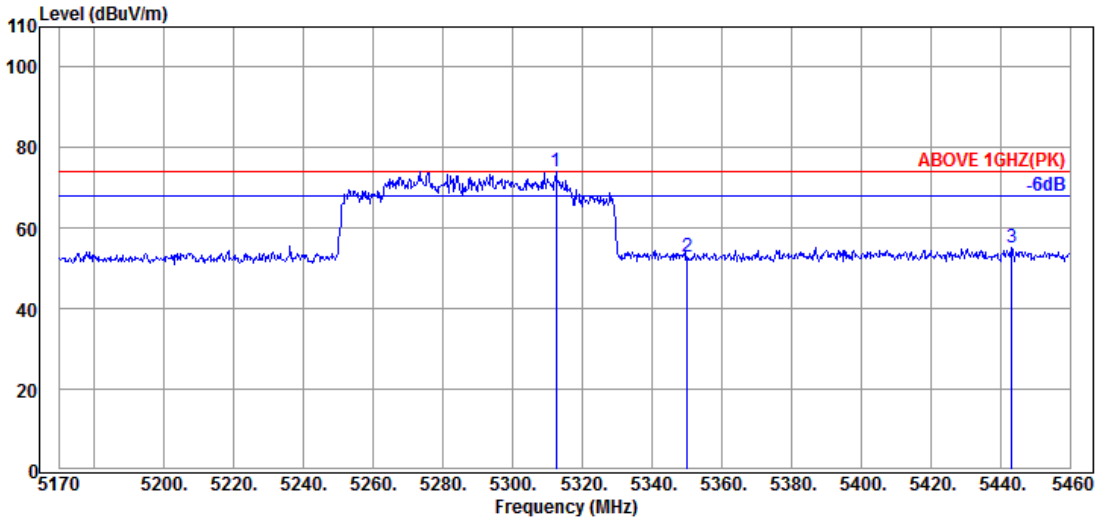

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.390	34.53	8.53	39.19	70.35	74.22	---	---	Peak
5350.090	34.60	8.56	39.19	48.96	52.93	74.00	21.07	Peak
5443.180	34.62	8.63	39.18	51.10	55.17	74.00	18.83	Peak

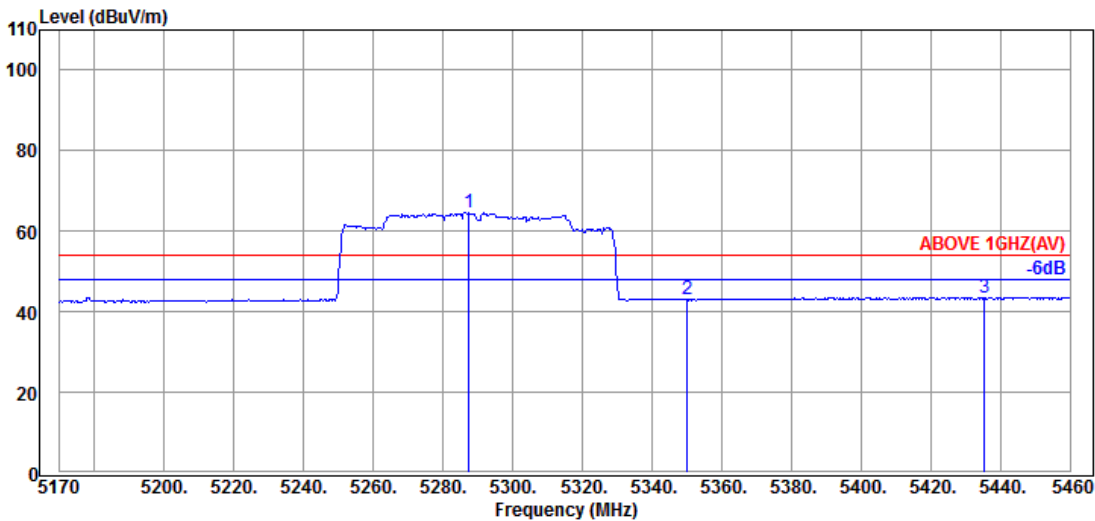


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.450	34.50	8.50	39.19	60.73	64.54	---	---	Average
5350.090	34.60	8.56	39.19	39.24	43.21	54.00	10.79	Average
5435.350	34.62	8.63	39.18	39.52	43.59	54.00	10.41	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

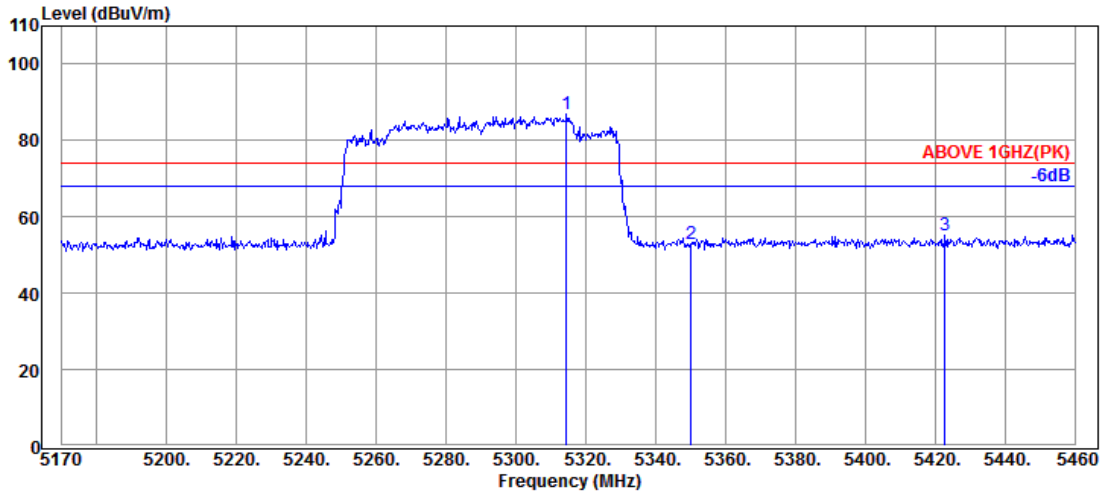

Antenna at Vertical Polarization
 Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.420	34.53	8.53	39.19	83.09	86.96	---	---	Peak
5350.090	34.60	8.56	39.19	48.97	52.94	74.00	21.06	Peak
5422.880	34.65	8.61	39.18	51.16	55.24	74.00	18.76	Peak

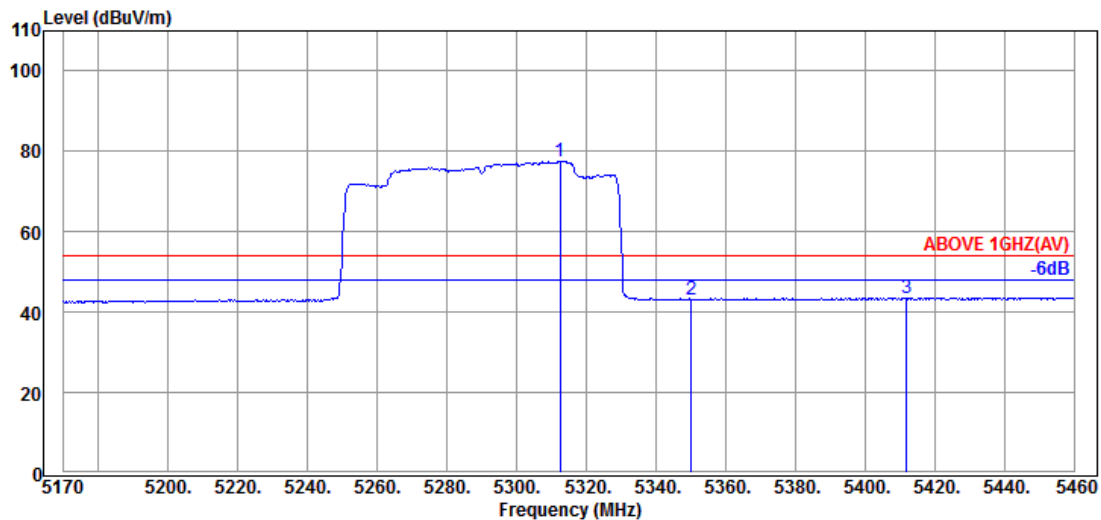


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.390	34.53	8.53	39.19	73.79	77.66	---	---	Average
5350.090	34.60	8.56	39.19	39.10	43.07	54.00	10.93	Average
5411.860	34.67	8.61	39.18	39.55	43.65	54.00	10.35	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

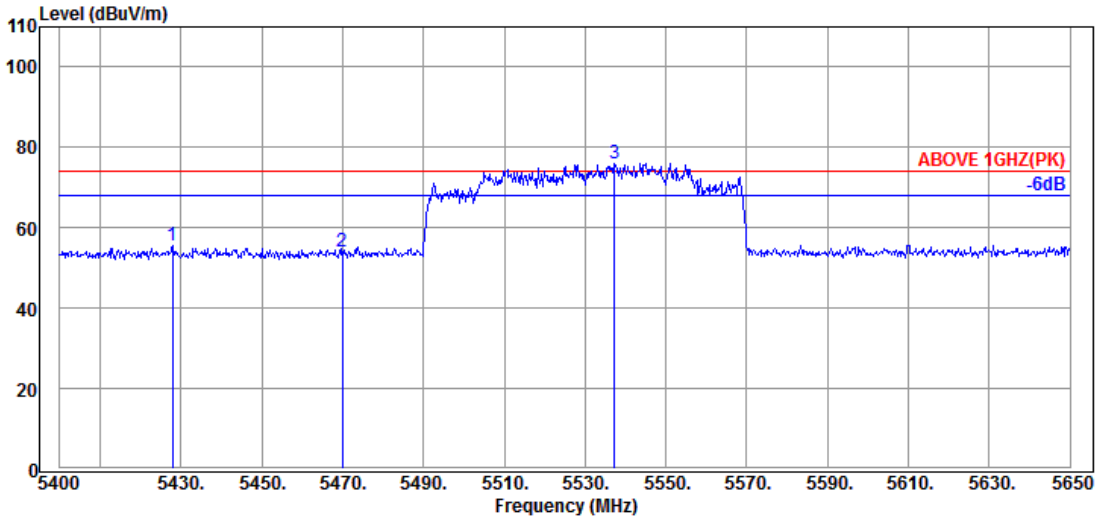

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.000	34.65	8.61	39.18	51.34	55.42	74.00	18.58	Peak
5470.000	34.57	8.65	39.17	50.14	54.19	74.00	19.70	Peak
@ 5537.250	34.57	8.71	39.18	72.00	76.10	---	---	Peak

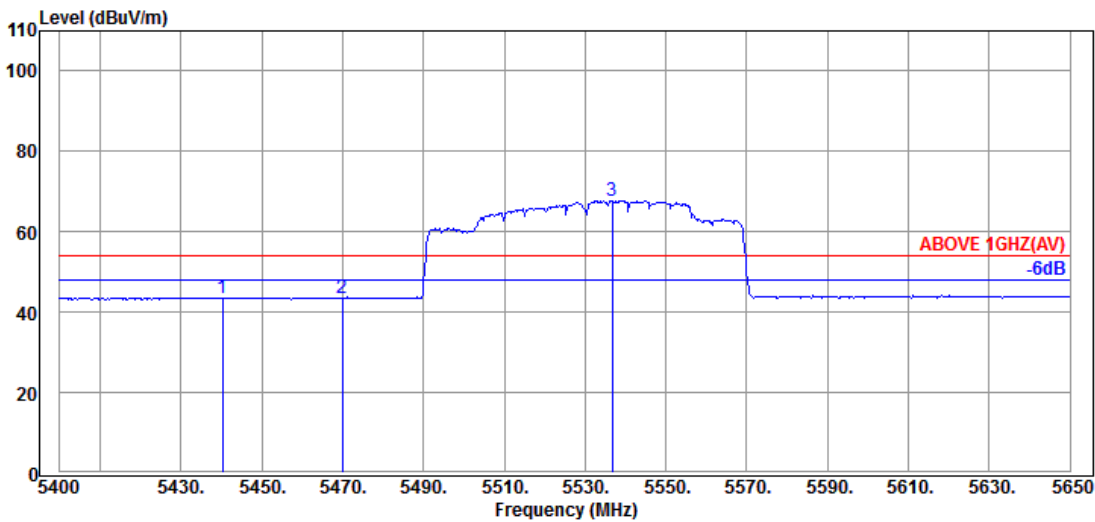


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.250	34.62	8.63	39.18	39.55	43.62	54.00	10.38	Average
5470.000	34.57	8.65	39.17	39.38	43.43	54.00	10.62	Average
@ 5536.750	34.57	8.71	39.18	63.62	67.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

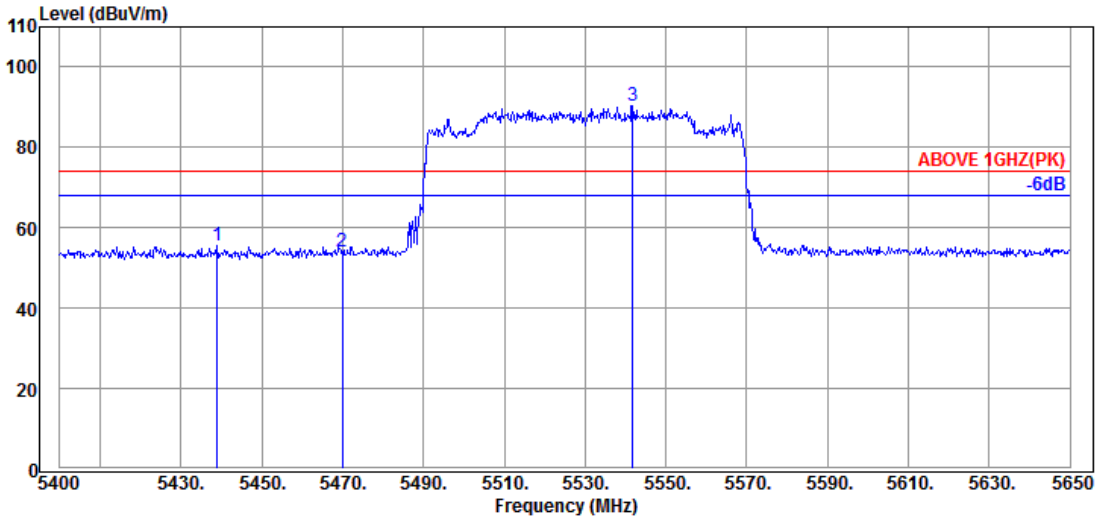

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.000	34.62	8.63	39.18	51.36	55.43	74.00	18.57	Peak
5470.000	34.57	8.65	39.17	49.94	53.99	74.00	20.28	Peak
@ 5541.750	34.57	8.71	39.18	86.31	90.41	---	---	Peak

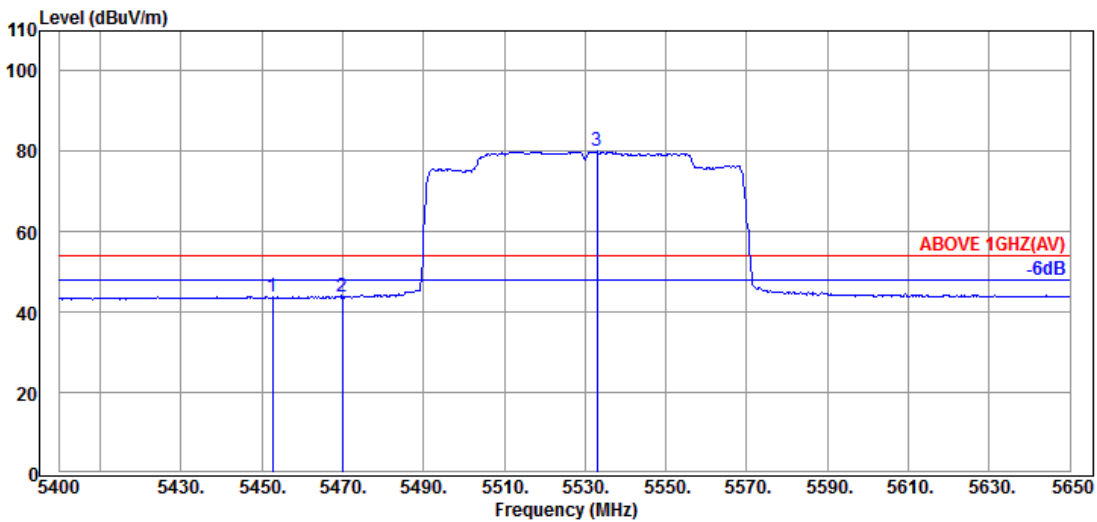


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.750	34.60	8.64	39.17	39.87	43.94	54.00	10.06	Average
5470.000	34.57	8.65	39.17	39.65	43.70	54.00	10.49	Average
@ 5533.000	34.57	8.71	39.18	75.87	79.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/S67	Frequency	TX 5570MHz

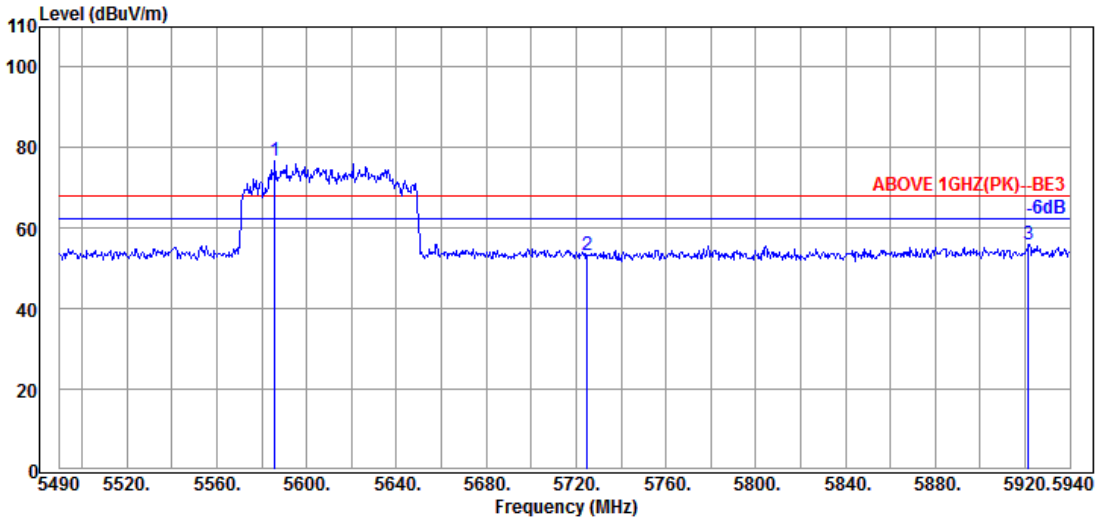

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5585.850	34.60	8.75	39.19	72.75	76.91	---	---	Peak
5724.900	34.50	8.86	39.23	49.18	53.31	68.20	14.89	Peak
5921.550	34.57	9.03	39.28	51.67	55.99	68.20	12.21	Peak

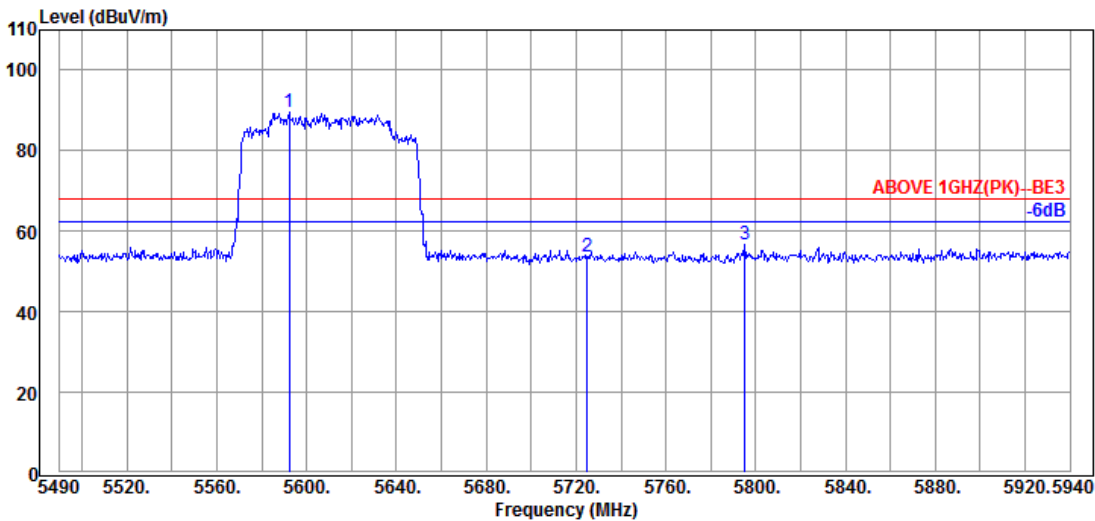

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.150	34.60	8.75	39.19	85.42	89.58	---	---	Peak
5724.900	34.50	8.86	39.23	49.37	53.50	68.20	14.70	Peak
5795.100	34.40	8.92	39.25	52.72	56.79	68.20	11.41	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Test SKU: SKU #1 (with INPAQ Antenna)

Mode	802.11a	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.82	34.75	31.04	48.81	54.00	5.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.82	34.75	30.96	48.73	54.00	5.27	Peak

Mode	802.11a	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.84	34.72	30.52	48.34	54.00	5.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.84	34.72	30.99	48.81	54.00	5.19	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.24	34.61	30.86	49.49	54.00	4.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.24	34.61	30.60	49.23	54.00	4.77	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.44	34.64	30.18	49.21	54.00	4.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.44	34.64	31.81	50.84	54.00	3.16	Peak

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.30	15.47	34.64	31.30	50.43	54.00	3.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.30	15.47	34.64	31.48	50.61	54.00	3.39	Peak

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.82	34.75	31.44	49.21	54.00	4.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.82	34.75	30.77	48.54	54.00	5.46	Peak

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.84	34.72	31.39	49.21	54.00	4.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.84	34.72	31.08	48.90	54.00	5.10	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.24	34.61	29.59	48.22	54.00	5.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.24	34.61	30.66	49.29	54.00	4.71	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.22	34.61	29.98	48.59	54.00	5.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.44	34.64	34.24	53.27	54.00	0.73	Peak

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.53	34.65	31.94	51.19	54.00	2.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11560.000	38.37	15.52	34.65	32.57	51.81	54.00	2.19	Peak

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.80	34.78	31.13	48.85	54.00	5.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.80	34.78	30.53	48.25	54.00	5.75	Peak

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.85	34.71	30.71	48.58	54.00	5.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.85	34.71	30.46	48.33	54.00	5.67	Peak

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.36	34.62	29.49	48.36	54.00	5.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.36	34.62	30.57	49.44	54.00	4.56	Peak

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.23	15.43	34.63	30.41	49.44	54.00	4.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.23	15.43	34.63	32.74	51.77	54.00	2.23	Peak

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.55	34.65	30.39	49.69	54.00	4.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.55	34.65	31.65	50.95	54.00	3.05	Peak

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.78	34.81	31.45	49.12	54.00	4.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.78	34.81	31.12	48.79	54.00	5.21	Peak

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	14.88	34.70	30.25	48.20	54.00	5.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	14.88	34.70	29.99	47.94	54.00	6.06	Peak

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.28	34.61	30.94	49.61	54.00	4.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.28	34.61	30.18	48.85	54.00	5.15	Peak

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.40	34.63	29.53	48.47	54.00	5.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.40	34.63	31.85	50.79	54.00	3.21	Peak

Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.52	34.65	30.85	50.05	54.00	3.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.52	34.65	31.14	50.34	54.00	3.66	Peak

Mode	802.11ac-VHT160	Band	I/NII-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.83	34.72	30.25	48.06	54.00	5.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.83	34.72	31.41	49.22	54.00	4.78	Peak

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.22	34.61	31.36	49.97	54.00	4.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.22	34.61	30.12	48.73	54.00	5.27	Peak

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.82	34.75	31.52	49.29	54.00	4.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.82	34.75	31.49	49.26	54.00	4.74	Peak

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.84	34.72	30.82	48.64	54.00	5.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.84	34.72	30.89	48.71	54.00	5.29	Peak

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.24	34.61	30.44	49.07	54.00	4.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.24	34.61	30.55	49.18	54.00	4.82	Peak

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.44	34.64	29.93	48.96	54.00	5.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.44	34.64	34.15	53.18	54.00	0.82	Peak

Mode	802.11ax-HE20	Band	NII-III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.53	34.65	30.92	50.17	54.00	3.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.53	34.65	34.13	53.38	54.00	0.62	Peak

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.80	34.78	33.09	50.81	54.00	3.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.80	34.78	31.18	48.90	54.00	5.10	Peak

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.85	34.71	32.09	49.96	54.00	4.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.85	34.71	30.93	48.80	54.00	5.20	Peak

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.36	34.62	30.34	49.21	54.00	4.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.36	34.62	30.85	49.72	54.00	4.28	Peak

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.23	15.43	34.63	30.59	49.62	54.00	4.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11430.000	38.23	15.44	34.63	32.45	51.49	54.00	2.51	Peak

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.55	34.65	31.38	50.68	54.00	3.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.55	34.65	32.88	52.18	54.00	1.82	Peak

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.78	34.81	30.80	48.47	54.00	5.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.78	34.81	31.67	49.34	54.00	4.66	Peak

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	14.88	34.70	30.63	48.58	54.00	5.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	14.88	34.70	29.83	47.78	54.00	6.22	Peak

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.28	34.61	30.98	49.65	54.00	4.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.28	34.61	30.59	49.26	54.00	4.74	Peak

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.40	34.63	30.50	49.44	54.00	4.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.40	34.63	31.68	50.62	54.00	3.38	Peak

Mode	802.11ax-HE80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.52	34.65	31.10	50.30	54.00	3.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.52	34.65	31.45	50.65	54.00	3.35	Peak

Mode	802.11ax-HE160	Band	NII-I/NII-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.83	34.72	31.38	49.19	54.00	4.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.83	34.72	30.46	48.27	54.00	5.73	Peak

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.22	34.61	30.15	48.76	54.00	5.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11150.000	38.00	15.23	34.61	31.96	50.58	54.00	3.42	Peak

Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Mode	802.11a	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	36.78	48.38	54.00	5.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	36.46	48.06	54.00	5.94	Peak

Mode	802.11a	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	37.64	49.33	54.00	4.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	37.11	48.80	54.00	5.20	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	37.77	50.82	54.00	3.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	36.47	49.52	54.00	4.48	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	37.20	50.79	54.00	3.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	37.55	51.14	54.00	2.86	Peak

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.40	13.37	39.00	37.18	50.95	54.00	3.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.40	13.37	39.00	37.13	50.90	54.00	3.10	Peak

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	37.15	48.75	54.00	5.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	38.26	49.86	54.00	4.14	Peak

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	37.98	49.67	54.00	4.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	38.42	50.11	54.00	3.89	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	37.18	50.23	54.00	3.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	38.22	51.27	54.00	2.73	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	36.75	50.34	54.00	3.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	37.90	51.49	54.00	2.51	Peak

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	36.08	50.19	54.00	3.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	37.81	51.92	54.00	2.08	Peak

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	39.29	50.80	54.00	3.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	37.65	49.16	54.00	4.84	Peak

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	38.19	49.91	54.00	4.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	37.83	49.55	54.00	4.45	Peak

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	38.71	52.06	54.00	1.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	38.08	51.43	54.00	2.57	Peak

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	38.38	51.95	54.00	2.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	37.58	51.15	54.00	2.85	Peak

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.80	13.50	39.06	37.58	51.82	54.00	2.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.80	13.50	39.06	39.21	53.45	54.00	0.55	Peak

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	38.47	49.89	54.00	4.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	37.22	48.64	54.00	5.36	Peak

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	38.71	50.48	54.00	3.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	38.83	50.60	54.00	3.40	Peak

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	37.62	50.82	54.00	3.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	37.01	50.21	54.00	3.79	Peak

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	37.74	51.18	54.00	2.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	38.43	51.87	54.00	2.13	Peak

Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	37.96	51.90	54.00	2.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	39.05	52.99	54.00	1.01	Peak

Mode	802.11ac-VHT160	Band	I/NII-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	37.48	49.16	54.00	4.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	38.10	49.78	54.00	4.22	Peak

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	38.73	51.64	54.00	2.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	38.88	51.79	54.00	2.21	Peak

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	37.98	49.58	54.00	4.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.38	12.36	39.14	37.89	49.49	54.00	4.51	Peak

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	38.49	50.18	54.00	3.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.40	12.39	39.10	38.34	50.03	54.00	3.97	Peak

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	39.38	52.43	54.00	1.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.00	12.96	38.91	37.24	50.29	54.00	3.71	Peak

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	37.71	51.30	54.00	2.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.27	13.31	38.99	37.88	51.47	54.00	2.53	Peak

Mode	802.11ax-HE20	Band	NII-III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	38.28	52.39	54.00	1.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.67	13.48	39.04	38.38	52.49	54.00	1.51	Peak

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	38.59	50.10	54.00	3.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.35	12.34	39.18	38.54	50.05	54.00	3.95	Peak

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	37.27	48.99	54.00	5.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.40	12.40	39.08	38.39	50.11	54.00	3.89	Peak

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	38.73	52.08	54.00	1.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	39.13	13.18	38.96	37.48	50.83	54.00	3.17	Peak

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	37.65	51.22	54.00	2.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.27	13.28	38.98	37.78	51.35	54.00	2.65	Peak

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.80	13.50	39.06	37.86	52.10	54.00	1.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.80	13.50	39.06	37.93	52.17	54.00	1.83	Peak

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	38.32	49.74	54.00	4.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.33	12.31	39.22	40.39	51.81	54.00	2.19	Peak

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	38.39	50.16	54.00	3.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.40	12.44	39.07	37.81	49.58	54.00	4.42	Peak

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	37.71	50.91	54.00	3.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	39.10	13.03	38.93	38.41	51.61	54.00	2.39	Peak

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	38.17	51.61	54.00	2.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.17	13.24	38.97	38.30	51.74	54.00	2.26	Peak

Mode	802.11ax-HE80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	38.05	51.99	54.00	2.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.53	13.45	39.04	37.31	51.25	54.00	2.75	Peak

Mode	802.11ax-HE160	Band	NII-I/NII-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	38.01	49.69	54.00	4.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	12.38	39.10	38.53	50.21	54.00	3.79	Peak

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	37.10	50.01	54.00	3.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.90	12.92	38.91	38.32	51.23	54.00	2.77	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.