

# TEST REPORT



**Dt&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2312-0177

2. Customer

• Name (FCC) : LG Electronics USA, Inc.

• Address (FCC) : 111 Sylvan Avenue North Building Englewood Cliffs New Jersey United States 07632

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Telematics(24CY DCM 5G) / TF24IENE

FCC ID : BEJTF24IENE2

5. FCC Regulation(s): Part 27

Test Method Used : KDB971168 D01v03, ANSI/TIA-603-E-2016, ANSI C63.26-2015

6. Date of Test : 2023.12.05 ~ 2023.12.22



7. Location of Test :  Permanent Testing Lab  On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : SeokHo Han  (Signature)	Name : JaeJin Lee  (Signature)

2023 . 12 . 28 .

**Dt&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2312-0177	Dec. 28, 2023	Initial issue	SeokHo Han	JaeJin Lee

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. INTRODUCTION .....</b>	<b>5</b>
2.1. EUT DESCRIPTION .....	5
2.2. TESTING ENVIRONMENT .....	5
2.3. MEASURING INSTRUMENT CALIBRATION.....	5
2.4. MEASUREMENT UNCERTAINTY .....	5
2.5. TEST FACILITY.....	5
<b>3. DESCRIPTION OF TESTS.....</b>	<b>6</b>
3.1. EIRP (Equivalent Isotropic Radiated Power).....	6
3.2. UNDESIRABLE EMISSIONS .....	8
<b>4. LIST OF TEST EQUIPMENT .....</b>	<b>10</b>
<b>5. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>6. SAMPLE CALCULATION .....</b>	<b>12</b>
<b>7. TEST DATA.....</b>	<b>13</b>
7.1. EIRP .....	13
7.1.1. 3 450 ~ 3 550 MHz band .....	13
7.1.2. 3 700 ~ 3 980 MHz band .....	16
7.2. UNDESIRABLE EMISSIONS (Radiated).....	19
7.2.1. 3 450 ~ 3 550 MHz band .....	19
7.2.2. 3 700 ~ 3 900 MHz band .....	19

## 1. GENERAL INFORMATION

<b>Equipment Class</b>	PCS Licensed Transmitter (PCB)
<b>Product Name</b>	Telematics(24CY DCM 5G)
<b>Model Name</b>	TF24IENE
<b>Add Model Name</b>	-
<b>PMN(Product Marketing Name)</b>	TF24IENE
<b>FVIN(Firmware Version Identification Number)</b>	N/A
<b>EUT Serial Number</b>	No specified
<b>Supplying power</b>	DC 12 V
<b>Waveform</b>	CP-OFDM, DFT-S-OFDM
<b>Modulation type</b>	$\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM
<b>Channel Bandwidth(MHz)</b>	NR Band n77: 100, 90, 80, 60, 50, 40, 30, 20

	Antenna Gain(dBi)
NR Band	Antenna 2 (Pannel Antenna)
n77(3 450 ~ 3 550 MHz)	0.6
n77(3 700 ~ 3 980 MHz)	-0.2

Note: The antenna gain was corrected for path loss from the conducted feed point to the antenna terminal.

## 2. INTRODUCTION

### 2.1. EUT DESCRIPTION

This device supports the following capabilities:

Multi-Band LTE, LTE up-link carrier aggregation and 5G NR(FR1)

5G NR supports SCS 15 kHz for FDD Band and SCS 30 kHz for TDD Band.

This device has 2 antennas and RF switch circuit.

5G NR Band	Antenna 1	Antenna 2
n12, n5, n66, n2	Support	Support
n77	Not support	Support

The device does not support MIMO technology.

### 2.2. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 °C ~ +23 °C
▪ Relative Humidity	39 % ~ 42 %

### 2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.4. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$ )
Radiated Disturbance (Above 18 GHz)	5.2 dB (The confidence level is about 95 %, $k = 2$ )


### 2.5. TEST FACILITY

Dt&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.	
The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.	
- FCC & IC MRA Designation No. : KR0034	
- ISED#: 5740A	
<a href="http://www.dtnet.net">www.dtnet.net</a>	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

### 3. DESCRIPTION OF TESTS

#### 3.1. EIRP (Equivalent Isotropic Radiated Power)

##### Test Set-up

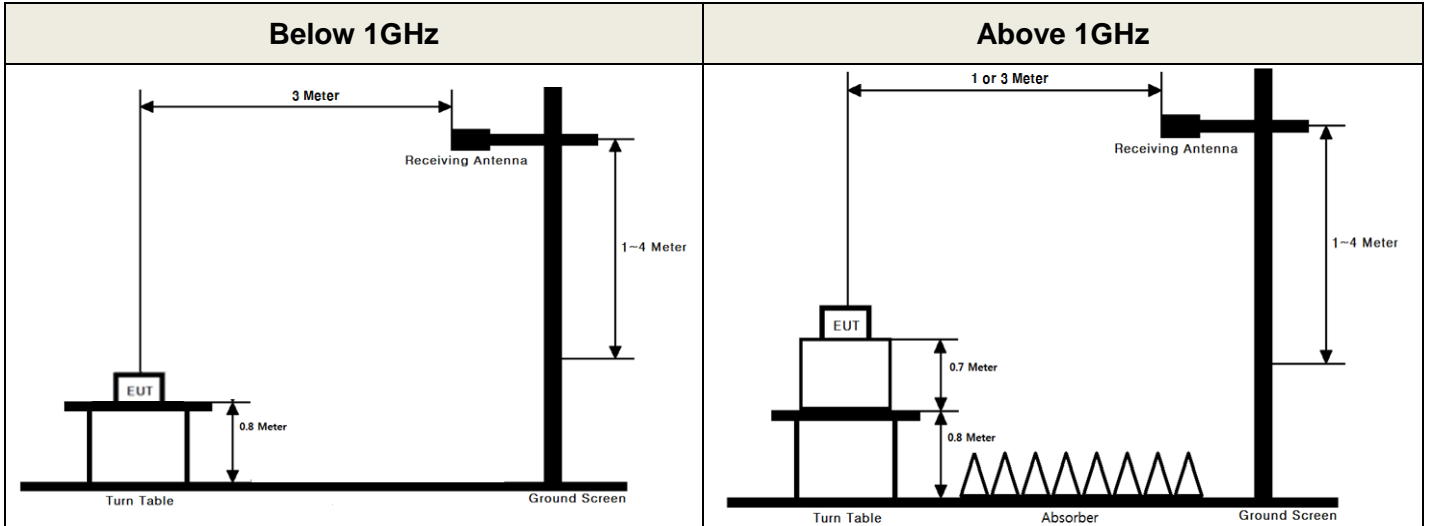

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

##### Limit

3450 ~ 3550 MHz band: Mobile devices are limited to 1Watt (30 dBm) EIRP.

3700 ~ 3980 MHz band: Mobile devices are limited to 1Watt (30 dBm) EIRP.

##### Test Procedure

- KDB971168 D01v03 - Section 5.4
- ANSI C63.26-2015 – Section 5.2.4.5, 5.2.4.4.2
- ANSI/TIA-603-E-2016 - Section 2.2.17

##### Test setting

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1 x to 5 x the OBW
3. Set VBW  $\geq$  3 x RBW.
4. Set number of points in sweep  $\geq$  2 x span / RBW.
5. Sweep time:
  - 1) Set = auto-couple, or
  - 2) Set  $\geq$   $[10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run"

8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function with band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
10. Add  $10 \log (1/\text{duty cycle})$  to the measured power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25%.

#### EUT duty cycle

Band	Frequency(MHz)	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty cycle = T <sub>on</sub> / (T <sub>on+off</sub> )	10 log (1/duty cycle)
n77	3500.0	1.0	5.0	0.2	7.0 dB

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

**ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]**

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

### 3.2. UNDESIRABLE EMISSIONS

#### Test Set-up

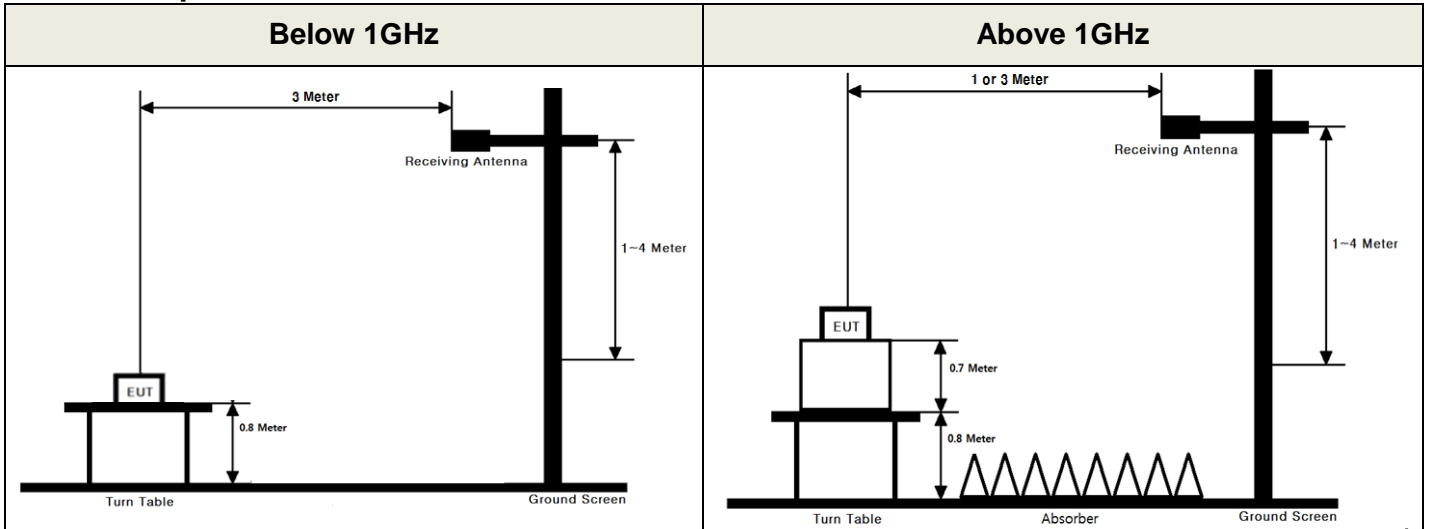

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

#### Limit

For mobile operations in the 3450-3550 MHz band and 3700-3980 MHz, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed  $-13$  dBm/MHz.

#### Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI/TIA-603-E-2016 - Section 2.2.12
- ANSI C63.26-2015 – Section 5.5

If the device cannot be configured to transmit continuously (duty cycle  $< 98\%$ ) and a free- running sweep must be used, set the sweep time so that the averaging is performed over multiple on/off cycles by setting the sweep time  $> (\text{number of points in sweep}) \times (\text{transmitter period})$  (i.e., the transmit on-time + the off-time). The spectrum analyzer readings shall subsequently be corrected by  $[10 \log (1/\text{duty cycle})]$ . This assumes that the transmission period and duty cycle is relatively constant (duty cycle variation  $\leq \pm 2\%$ ).

#### Test setting

1. RBW = 1 MHz / VBW  $\geq 3 \times$  RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point  $\geq 2 \times$  span / RBW
5. The trace was allowed to stabilize



The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration. This measurement was performed with the EUT oriented in 3 orthogonal axis.

#### 4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY50110097
			23/12/15	24/12/15	
Multimeter	FLUKE	17B+	22/12/16	23/12/16	36390701WS
			23/12/15	24/12/15	
Radio Communication Analyzer	KEYSIGHT	E7515B	23/06/23	24/06/23	MY60192461
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-2
			23/12/15	24/12/15	
Signal Generator	Rohde Schwarz	SMBV100A	22/12/16	23/12/16	255571
			23/12/15	24/12/15	
Signal Generator	ANRITSU	MG3695C	22/12/16	23/12/16	173501
			23/12/15	24/12/15	
Power Divider	Weinschel	1515-1	23/06/23	24/06/23	UB881
Hybrid Antenna	Schwarzbeck	VULB 9160	22/12/16	23/12/16	3362
			23/12/15	24/12/15	
Dipole Antenna	Schwarzbeck	UHA9105	22/12/16	23/12/16	2262
			23/12/15	24/12/15	
Horn Antenna	ETS-Lindgren	3117	22/12/16	23/12/16	00140394
			23/12/15	24/12/15	
Horn Antenna	A.H.Systems Inc.	SAS-574	23/06/23	24/06/23	155
PreAmplifier	H.P	8447D	22/12/16	23/12/16	2944A07774
			23/12/15	24/12/15	
PreAmplifier	Agilent	8449B	22/12/16	23/12/16	3008A02108
			23/12/15	24/12/15	
PreAmplifier	tsj	MLA-1840-J02-45	23/06/23	24/06/23	16966-10728
Band Reject Fliter	Wainwright	WTRCTV5-1710-2000-20-60-40SSM	23/06/23	24/06/23	1
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	23/06/23	24/06/23	7
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	23/06/23	24/06/23	2
High Pass Filter	Wainwright Instruments	WHKX6-6320-8000-26500-40CC	23/06/23	24/06/23	2
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-2
Cable	Junkosha	MWX241/B	23/01/04	24/01/04	M-3
Cable	Junkosha	MWX221	23/01/04	24/01/04	M-4
Cable	Junkosha	MWX221	23/01/04	24/01/04	M-5
Cable	JUNFLON	J12J101757-00	23/01/04	24/01/04	M-7
Cable	HUBER+SUHNER	SUCOFLEX104	23/01/04	24/01/04	M-8
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04	24/01/04	M-9
Cable	Junkosha	MWX315	23/01/04	24/01/04	M-10
Cable	DTNC	Cable	23/01/04	24/01/04	RFC-44
Cable	JUNKOSHA	MWX241	23/01/03	24/01/03	mmW-1
Cable	JUNKOSHA	MWX241	23/01/03	24/01/03	mmW-4

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.

## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
27.50(k.3) 27.50(j.3)	Radiated Output Power	< 1 Watts max. EIRP	Radiated	C Note2
2.1053 27.53(n) 27.53(l)	Undesirable Emissions	< -13 dBm/MHz		C Note2
Note 1: <b>C</b> =Comply <b>NC</b> =Not Comply <b>NT</b> =Not Tested <b>NA</b> =Not Applicable Note 2: This test item was performed in three orthogonal EUT positions and the worst case data was reported. Note 3: This device uses the certified module.(FCC ID: BEJTM15FNNATY0, IC: 2703H-TM15FNNATY0) Please refer to the module test report for conducted signal test items. The conducted output power was verified to be the same as module. Note 4: All antenna configuration were investigated and worst case data were reported. Note 5: The DFT-s-OFDM and CP-OFDM waveforms were investigated, and worst case(DFT-s-OFDM) configuration results are reported.				

## 6. SAMPLE CALCULATION

### A. Emission Designator

- 1) The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1 GHz respectively above ground.
- 2) The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3) During the test, the turn table is rotated until the maximum signal is found.
- 4) Record the field strength meter's level. (ex. Spectrum reading level is -8.5 dBm)
- 5) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 6) Increase the signal generator output till the field strength meter's level is equal to the item (4).  
(ex. Signal generator level is -18.04 dBm)
- 7) The gain of the cable and amplifier between the signal generator and terminals of substituted antenna is 46.92 dB at test frequency.
- 8) Record the level at substituted antenna terminal. (ex. 28.88dBm)
- 9) The result is calculated as below;

$$\text{EIRP(dBm)} = \text{LEVLE@ANTENNA TERMINAL} + \text{TX Antenna Gain (dBi)}$$

$$\text{ERP(dBm)} = \text{LEVLE@ANTENNA TERMINAL} + \text{TX Antenna Gain (dBd)}$$

$$\text{Where, TX Antenna Gain (dBd)} = \text{TX Antenna Gain (dBi)} - 2.15 \text{ dB}$$

## 7. TEST DATA

### 7.1. EIRP

#### - Test Notes

- 1) This is device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the below table.

#### 7.1.1. 3 450 ~ 3 550 MHz band

##### <Test case: ANT 2>

Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size/ Offset	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)
100	3 500.01	$\pi/2$ BPSK	1/1	H	16.67	8.48	25.15	0.327
		QPSK		H	16.55	8.48	25.03	0.318
		16QAM		H	15.60	8.48	24.08	0.256
		64QAM		H	13.95	8.48	22.43	0.175
		256QAM		H	11.79	8.48	20.27	0.106
90	3 495.00	$\pi/2$ BPSK	1/1	H	16.59	8.46	25.05	0.320
		QPSK		H	16.08	8.46	24.54	0.284
		16QAM		H	15.54	8.46	24.00	0.251
		64QAM		H	14.02	8.46	22.48	0.177
		256QAM		H	11.30	8.46	19.76	0.095
	3 504.99	$\pi/2$ BPSK	1/1	H	16.57	8.48	25.05	0.320
		QPSK		H	16.50	8.48	24.98	0.315
		16QAM		H	15.76	8.48	24.24	0.265
		64QAM		H	14.39	8.48	22.87	0.194
		256QAM		H	12.17	8.48	20.65	0.116
80	3 490.02	$\pi/2$ BPSK	1/1	H	16.46	8.44	24.90	0.309
		QPSK		H	15.95	8.44	24.39	0.275
		16QAM		H	15.41	8.44	23.85	0.243
		64QAM		H	13.89	8.44	22.33	0.171
		256QAM		H	11.17	8.44	19.61	0.091
	3 510.00	$\pi/2$ BPSK	1/1	H	16.48	8.47	24.95	0.313
		QPSK		H	15.98	8.47	24.45	0.279
		16QAM		H	14.93	8.47	23.40	0.219
		64QAM		H	14.30	8.47	22.77	0.189
		256QAM		H	12.18	8.47	20.65	0.116
60	3 480.00	$\pi/2$ BPSK	1/1	H	15.96	8.40	24.36	0.273
		QPSK		H	15.66	8.40	24.06	0.255
		16QAM		H	14.91	8.40	23.31	0.214
		64QAM		H	13.52	8.40	21.92	0.156
		256QAM		H	11.29	8.40	19.69	0.093
	3 519.99	$\pi/2$ BPSK	1/160	H	16.17	8.47	24.64	0.291
		QPSK		H	16.05	8.47	24.52	0.283
		16QAM		H	14.81	8.47	23.28	0.213
		64QAM		H	13.82	8.47	22.29	0.169
		256QAM		H	11.92	8.47	20.39	0.109

Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size/ Offset	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)
50	3 475.02	$\pi/2$ BPSK	1/1	H	16.58	8.38	24.96	0.313
		QPSK		H	16.34	8.38	24.72	0.296
		16QAM		H	15.20	8.38	23.58	0.228
		64QAM		H	13.32	8.38	21.70	0.148
		256QAM		H	11.28	8.38	19.66	0.092
	3 525.00	$\pi/2$ BPSK	1/66	H	15.98	8.47	24.45	0.279
		QPSK		H	15.85	8.47	24.32	0.270
		16QAM		H	15.44	8.47	23.91	0.246
		64QAM		H	13.50	8.47	21.97	0.157
		256QAM		H	11.43	8.47	19.90	0.098
40	3 470.01	$\pi/2$ BPSK	1/1	H	15.40	8.35	23.75	0.237
		QPSK		H	14.91	8.35	23.26	0.212
		16QAM		H	14.17	8.35	22.52	0.179
		64QAM		H	13.59	8.35	21.94	0.156
		256QAM		H	11.92	8.35	20.27	0.106
	3 500.01	$\pi/2$ BPSK	1/1	H	16.36	8.48	24.84	0.305
		QPSK		H	16.21	8.48	24.69	0.294
		16QAM		H	15.16	8.48	23.64	0.231
		64QAM		H	14.18	8.48	22.66	0.185
		256QAM		H	13.07	8.48	21.55	0.143
	3 529.98	$\pi/2$ BPSK	1/104	H	15.76	8.46	24.22	0.264
		QPSK		H	15.10	8.46	23.56	0.227
		16QAM		H	14.79	8.46	23.25	0.211
		64QAM		H	13.08	8.46	21.54	0.143
		256QAM		H	11.26	8.46	19.72	0.094
30	3 465.00	$\pi/2$ BPSK	1/39	H	15.85	8.33	24.18	0.262
		QPSK		H	15.67	8.33	24.00	0.251
		16QAM		H	14.64	8.33	22.97	0.198
		64QAM		H	13.98	8.33	22.31	0.170
		256QAM		H	11.56	8.33	19.89	0.097
	3 500.01	$\pi/2$ BPSK	1/76	H	15.79	8.48	24.27	0.267
		QPSK		H	15.71	8.48	24.19	0.262
		16QAM		H	15.34	8.48	23.82	0.241
		64QAM		H	14.21	8.48	22.69	0.186
		256QAM		H	12.25	8.48	20.73	0.118
	3 534.99	$\pi/2$ BPSK	1/76	H	16.38	8.46	24.84	0.305
		QPSK		H	15.86	8.46	24.32	0.270
		16QAM		H	14.65	8.46	23.11	0.205
		64QAM		H	13.68	8.46	22.14	0.164
		256QAM		H	11.57	8.46	20.03	0.101

Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size/ Offset	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)
20	3 460.01	$\pi/2$ BPSK	1/1	H	15.90	8.31	24.21	0.264
		QPSK		H	15.59	8.31	23.90	0.245
		16QAM		H	14.93	8.31	23.24	0.211
		64QAM		H	13.47	8.31	21.78	0.151
		256QAM		H	11.54	8.31	19.85	0.097
	3 500.01	$\pi/2$ BPSK	1/49	H	15.89	8.48	24.37	0.274
		QPSK		H	15.62	8.48	24.10	0.257
		16QAM		H	14.67	8.48	23.15	0.207
		64QAM		H	13.72	8.48	22.20	0.166
		256QAM		H	10.60	8.48	19.08	0.081
	3 540.00	$\pi/2$ BPSK	1/1	H	16.41	8.46	24.87	0.307
		QPSK		H	16.14	8.46	24.60	0.288
		16QAM		H	15.17	8.46	23.63	0.231
		64QAM		H	14.36	8.46	22.82	0.191
		256QAM		H	11.90	8.46	20.36	0.109

**7.1.2. 3 700 ~ 3 980 MHz band**
**<Test case: ANT 2>**

Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size/ Offset	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)
100	3 750.00	$\pi/2$ BPSK	1/271	H	16.46	8.28	24.74	0.298
		QPSK		H	16.25	8.28	24.53	0.284
		16QAM		H	15.53	8.28	23.81	0.240
		64QAM		H	14.83	8.28	23.11	0.205
		256QAM		H	11.79	8.28	20.07	0.102
	3 840.00	$\pi/2$ BPSK	1/1	H	15.73	8.64	24.37	0.274
		QPSK		H	15.45	8.64	24.09	0.256
		16QAM		H	14.79	8.64	23.43	0.220
		64QAM		H	13.07	8.64	21.71	0.148
		256QAM		H	10.98	8.64	19.62	0.092
	3 930.00	$\pi/2$ BPSK	1/1	H	14.52	9.07	23.59	0.229
		QPSK		H	14.37	9.07	23.44	0.221
		16QAM		H	13.25	9.07	22.32	0.171
		64QAM		H	12.44	9.07	21.51	0.142
		256QAM		H	10.37	9.07	19.44	0.088
90	3 745.02	$\pi/2$ BPSK	1/122	H	15.98	8.28	24.26	0.267
		QPSK		H	15.87	8.28	24.15	0.260
		16QAM		H	15.13	8.28	23.41	0.219
		64QAM		H	13.78	8.28	22.06	0.161
		256QAM		H	11.88	8.28	20.16	0.104
	3 840.00	$\pi/2$ BPSK	1/1	H	15.80	8.64	24.44	0.278
		QPSK		H	15.71	8.64	24.35	0.272
		16QAM		H	14.58	8.64	23.22	0.210
		64QAM		H	12.98	8.64	21.62	0.145
		256QAM		H	11.61	8.64	20.25	0.106
	3 934.98	$\pi/2$ BPSK	1/122	H	14.83	9.07	23.90	0.245
		QPSK		H	14.42	9.07	23.49	0.223
		16QAM		H	13.51	9.07	22.58	0.181
		64QAM		H	11.99	9.07	21.06	0.128
		256QAM		H	10.70	9.07	19.77	0.095
80	3 740.01	$\pi/2$ BPSK	1/215	H	15.90	8.29	24.19	0.262
		QPSK		H	15.71	8.29	24.00	0.251
		16QAM		H	14.96	8.29	23.25	0.211
		64QAM		H	13.49	8.29	21.78	0.151
		256QAM		H	11.70	8.29	19.99	0.100
	3 840.00	$\pi/2$ BPSK	1/1	H	15.74	8.64	24.38	0.274
		QPSK		H	15.51	8.64	24.15	0.260
		16QAM		H	14.74	8.64	23.38	0.218
		64QAM		H	13.44	8.64	22.08	0.161
		256QAM		H	11.46	8.64	20.10	0.102
	3 939.99	$\pi/2$ BPSK	1/1	H	14.83	9.06	23.89	0.245
		QPSK		H	14.71	9.06	23.77	0.238
		16QAM		H	14.19	9.06	23.25	0.211
		64QAM		H	12.57	9.06	21.63	0.146
		256QAM		H	10.59	9.06	19.65	0.092



Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size/ Offset	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)
60	3 730.02	$\pi/2$ BPSK	1/160	H	15.84	8.30	24.14	0.259
		QPSK		H	15.58	8.30	23.88	0.244
		16QAM		H	14.60	8.30	22.90	0.195
		64QAM		H	13.68	8.30	21.98	0.158
		256QAM		H	11.55	8.30	19.85	0.097
	3 840.00	1/81	$\pi/2$ BPSK	H	15.18	8.64	23.82	0.241
			QPSK	H	14.99	8.64	23.63	0.231
			16QAM	H	14.49	8.64	23.13	0.206
			64QAM	H	12.63	8.64	21.27	0.134
			256QAM	H	10.61	8.64	19.25	0.084
	3 949.98	1/1	$\pi/2$ BPSK	H	14.71	9.06	23.77	0.238
			QPSK	H	14.49	9.06	23.55	0.226
			16QAM	H	13.45	9.06	22.51	0.178
			64QAM	H/V	11.79	9.06	20.85	0.122
			256QAM	H	10.22	9.06	19.28	0.085
50	3 725.01	1/1	$\pi/2$ BPSK	H	15.49	8.31	23.80	0.240
			QPSK	H	15.33	8.31	23.64	0.231
			16QAM	H	14.21	8.31	22.52	0.179
			64QAM	H	12.84	8.31	21.15	0.130
			256QAM	H	10.44	8.31	18.75	0.075
	3 840.00	1/1	$\pi/2$ BPSK	H	15.37	8.64	24.01	0.252
			QPSK	H	15.19	8.64	23.83	0.242
			16QAM	H	14.29	8.64	22.93	0.196
			64QAM	H	13.15	8.64	21.79	0.151
			256QAM	H	10.80	8.64	19.44	0.088
	3 954.99	1/1	$\pi/2$ BPSK	H	14.82	9.06	23.88	0.244
			QPSK	H	14.49	9.06	23.55	0.226
			16QAM	H	13.93	9.06	22.99	0.199
			64QAM	H	12.74	9.06	21.80	0.151
			256QAM	H	10.57	9.06	19.63	0.092
40	3 720.00	1/53	$\pi/2$ BPSK	H	15.75	8.32	24.07	0.255
			QPSK	H	15.52	8.32	23.84	0.242
			16QAM	H	14.46	8.32	22.78	0.190
			64QAM	H	13.30	8.32	21.62	0.145
			256QAM	H	11.27	8.32	19.59	0.091
	3 840.00	1/1	$\pi/2$ BPSK	H	15.14	8.64	23.78	0.239
			QPSK	H	14.86	8.64	23.50	0.224
			16QAM	H	13.64	8.64	22.28	0.169
			64QAM	H	12.47	8.64	21.11	0.129
			256QAM	H	10.38	8.64	19.02	0.080
	3 960.00	1/1	$\pi/2$ BPSK	H	14.32	9.06	23.38	0.218
			QPSK	H	14.07	9.06	23.13	0.206
			16QAM	H	12.97	9.06	22.03	0.160
			64QAM	H	11.66	9.06	20.72	0.118
			256QAM	H	9.83	9.06	18.89	0.077

Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size/ Offset	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	EIRP (dBm)	EIRP (W)
30	3 715.02	$\pi/2$ BPSK	1/1	H	15.86	8.32	24.18	0.262
		QPSK		H	15.54	8.32	23.86	0.243
		16QAM		H	14.41	8.32	22.73	0.187
		64QAM		H	13.22	8.32	21.54	0.143
		256QAM		H	11.07	8.32	19.39	0.087
	3 840.00	$\pi/2$ BPSK	1/76	H	15.17	8.64	23.81	0.240
		QPSK		H	15.06	8.64	23.70	0.234
		16QAM		H	13.37	8.64	22.01	0.159
		64QAM		H	12.72	8.64	21.36	0.137
		256QAM		H	10.68	8.64	19.32	0.086
	3 964.98	$\pi/2$ BPSK	1/1	H	14.47	9.06	23.53	0.225
		QPSK		H	14.16	9.06	23.22	0.210
		16QAM		H	13.31	9.06	22.37	0.173
		64QAM		H	11.63	9.06	20.69	0.117
		256QAM		H	10.11	9.06	19.17	0.083
20	3 710.01	$\pi/2$ BPSK	1/1	H	15.56	8.33	23.89	0.245
		QPSK		H	15.24	8.33	23.57	0.228
		16QAM		H	14.50	8.33	22.83	0.192
		64QAM		H	13.43	8.33	21.76	0.150
		256QAM		H	11.21	8.33	19.54	0.090
	3 840.00	$\pi/2$ BPSK	1/25	H	15.59	8.64	24.23	0.265
		QPSK		H	15.21	8.64	23.85	0.243
		16QAM		H	14.39	8.64	23.03	0.201
		64QAM		H	13.16	8.64	21.80	0.151
		256QAM		H	11.00	8.64	19.64	0.092
	3 969.99	$\pi/2$ BPSK	1/1	H	14.42	9.06	23.48	0.223
		QPSK		H	14.35	9.06	23.41	0.219
		16QAM		H	13.56	9.06	22.62	0.183
		64QAM		H	12.50	9.06	21.56	0.143
		256QAM		H	10.33	9.06	19.39	0.087

## 7.2. UNDESIRABLE EMISSIONS (Radiated)

### - Test Notes

- 1) The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter.  
No other spurious and harmonic emissions were reported greater than listed emissions.
- 2) EN-DC mode operation were investigated and the worst case configuration results are reported.
- 3) Limit for NR Band n77 = -13 dBm/MHz

### 7.2.1. 3 450 ~ 3 550 MHz band

#### <Test case: ANT 2>

Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB size/offset	Freq.(MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	Result (dBm)	Limit (dBm)	Margin (dB)
100	3 500.01	$\pi/2$ BPSK	1/1	6 901.89	V	-60.70	11.46	-49.24	-13.00	36.24
		QPSK		6 902.50	V	-60.56	11.46	-49.10	-13.00	36.10
		16QAM		6 902.28	V	-60.46	11.46	-49.00	-13.00	36.00
		64QAM		6 902.15	V	-60.49	11.46	-49.03	-13.00	36.03
		256QAM		6 902.57	V	-60.85	11.46	-49.39	-13.00	36.39

### 7.2.2. 3 700 ~ 3 900 MHz band

#### <Test case: ANT 2>

Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB size/offset	Freq.(MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	Result (dBm)	Limit (dBm)	Margin (dB)
100	3 750.00	$\pi/2$ BPSK	1/271	7 597.16	V	-56.52	12.17	-44.35	-13.00	31.35
		QPSK		7 597.20	V	-56.18	12.17	-44.01	-13.00	31.01
		16QAM		7 597.28	V	-57.78	12.17	-45.61	-13.00	32.61
		64QAM		7 597.12	V	-58.25	12.17	-46.08	-13.00	33.08
		256QAM		7 597.06	V	-59.99	12.17	-47.82	-13.00	34.82
	3 840.00	$\pi/2$ BPSK	1/1	7 582.73	V	-55.73	12.18	-43.55	-13.00	30.55
		QPSK		7 582.84	V	-55.59	12.18	-43.41	-13.00	30.41
		16QAM		7 582.63	V	-56.81	12.18	-44.63	-13.00	31.63
		64QAM		7 582.81	V	-58.00	12.18	-45.82	-13.00	32.82
		256QAM		7 582.97	V	-59.56	12.18	-47.38	-13.00	34.38
	3 930.00	$\pi/2$ BPSK	1/1	7 762.67	V	-47.28	12.28	-35.00	-13.00	22.00
		QPSK		7 762.78	V	-46.90	12.28	-34.62	-13.00	21.62
		16QAM		7 762.79	V	-47.67	12.28	-35.39	-13.00	22.39
		64QAM		7 762.82	V	-50.03	12.28	-37.75	-13.00	24.75
		256QAM		7 762.93	V	-54.35	12.28	-42.07	-13.00	29.07

**ENDC MODE: NR n77 + LTE B2**  
**<Test case: ANT 2>**

Band	Channel Bandwidth (MHz)	Frequency (MHz)	Modulation	RB size/offset
NR n77	100	3 500.01	QPSK	1/1
LTE B2	20	1 860	QPSK	1/50

Freq.(MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBi)	Result (dBm)	Limit (dBm)	Margin (dB)
3720.23	H	-67.74	8.32	-59.42	-13.00	46.42
6899.29	V	-60.66	11.46	-49.20	-13.00	36.20
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-