

User Manual

(TL1R22NR, TL1R22NE)

FCC ID : BEJTL1R22NR

1. Product Introduction

The **TL1R22NR** are designed for the automotive industry. They support LTE and WCDMA air Interface standards. The **TL1R22NR** are based on the Qualcomm MDM9250 wireless chipsets and support the following bands.

Table 1. Supported Band

	Band	TL1R22NR	TL1R22NE
Band	B2	G, W, L	W, L
	B4	W, L	W, L
	B5	G, W, L	W, L
	B7	L	L
	B12(B17)	L	L
	B26	L	
	B41	L	

G: GSM / W: WCDMA / L: LTE

1.1 Block Diagram

Confidential

Figure 1.1. TL1R22NR Block diagram

1.2 Environmental Specifications

The environmental specification for operating and storage of the **TL1R22NR** are defined in the table below.

Table 2. Environmental Specifications

Parameter	Temperature Range
Operating Temperature	-40°C to 90°C (ecall 95°C)
Storage Temperature	-40°C to +95°C
Humidity	95% or less

1.3 Electrical Specifications

This section provides details for some of the key electrical specifications of the **TL1R22NR** embedded modules.

1.3.1 Absolute Maximum Rating and ESD Ratings

This section defines the Absolute Maximum and Electrostatic Discharge (ESD) Ratings of the **TL1R22NR** embedded modules.

Warning: If these parameters are exceeded, even momentarily, damage may occur to the device.

Table 3. Absolute Maximum Ratings

Parameter		Min	Max	Units
VBATT	Power Supply Input	-	18	V
VIN	Voltage on any digital input or output pin	-	18	V
ESD Ratings				
ESD ¹⁾	Primary, Diversity antenna pads - Contact		10	kV

1) The ESD Simulator configured with 330pF, 2000Ω.

Caution: The **TL1R22NR** embedded modules are sensitive to Electrostatic Discharge. ESD countermeasures and handling methods must be used when handling the **TL1R22NR** devices.

1.3.2 Current Consumption

Table 4. **TL1R22NR** Current Consumption (12.5V)

Mode	Parameter	Typical	Max	Units
LTE	Max TX Output /Full RB	450	550	mA
WCDMA	Max TX Output /Full RB	450	550	mA
LTE	Idle, Registered	2	4	mA
WCDMA	Idle, Registered	2	4	mA
LTE	Sleep Mode, Average Current	0.03		mA
WCDMA	Sleep Mode, Average Current	0.03		mA

1.4 Mechanical Specifications



1.4.1 Physical Dimensions and Connection Interface

Mechanical structure diagram

Roof variant

Size : 160 x 100 x 18mm

Weight : Low variant – 285.7g

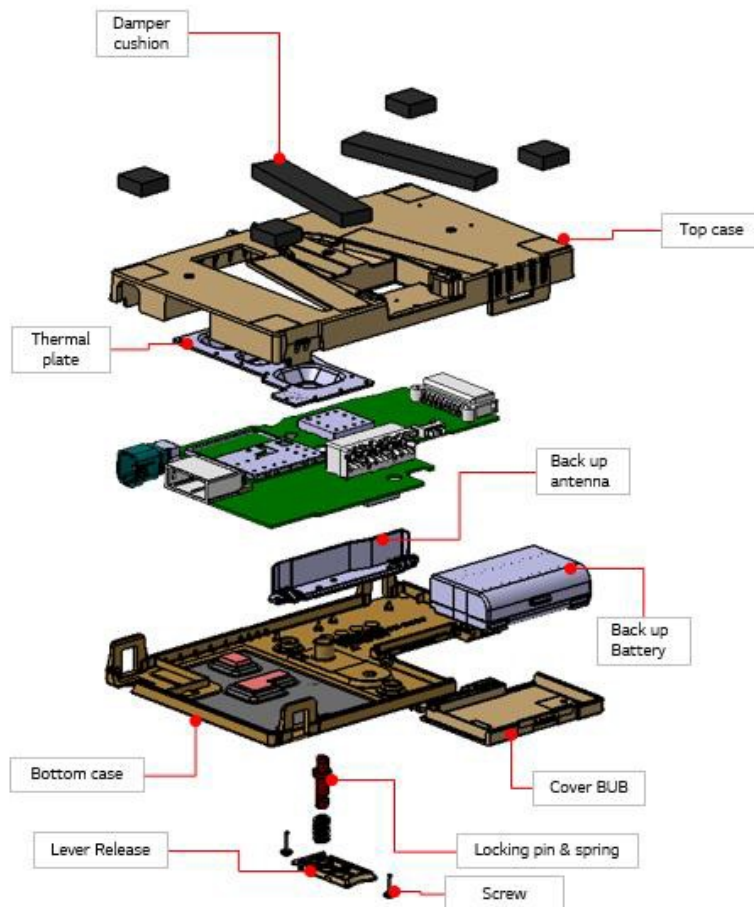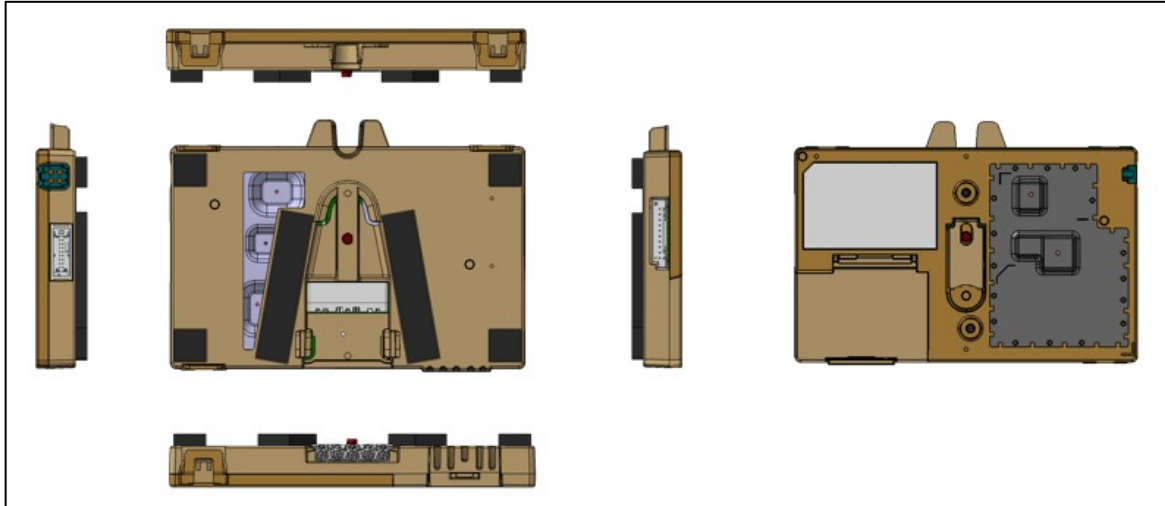

2. RF Specification

The specifications for the LTE and WCDMA interfaces are defined.

TL1R22NR is designed to be compliant with the standard shown in the table below.

Table6. Standards Compliance

Technology	Standards
LTE	• 3GPP Release 11
WCDMA	• 3GPP Release 9
GSM	• 3GPP Release 8

3. Warning Statement

FCC Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiating element of this device and the user.